

SAVANNAH HARBOR EXPANSION PROJECT CHATMAN
COUNTY, GEORGIA AND JASPER COUNTY, SOUTH
CAROLINA: FINAL GENERAL RE-EVALUATION RE-
PORT AND ENVIRONMENTAL IMPACT STATEMENT
JANUARY 2012

COMMUNICATION

FROM

THE ASSISTANT SECRETARY OF THE ARMY,
CIVIL WORKS, THE DEPARTMENT OF
DEFENSE

TRANSMITTING

THE CORPS' FINAL GENERAL RE-EVALUATION REPORT AND
ENVIRONMENTAL IMPACT STATEMENT

PART 14 OF 15



NOVEMBER 9, 2012.—Referred to the Committee on Transportation and
Infrastructure and ordered to be printed

U.S. GOVERNMENT PRINTING OFFICE

81-604

WASHINGTON : 2013

FINAL
ENVIRONMENTAL IMPACT STATEMENT

SAVANNAH HARBOR EXPANSION PROJECT

Chatham County, Georgia and Jasper County, South Carolina

January 2012

(Revised July 2012)

Appendix N

Volume 5



**US Army Corps of
Engineers**
*Savannah District
South Atlantic Division*

ENVIRONMENTAL IMPACT STATEMENT

APPENDIX N: Record of Interagency Coordination

SAVANNAH HARBOR EXPANSION PROJECT

Chatham County, Georgia and Jasper County, South Carolina

January 2012



**US Army Corps
of Engineers**
*Savannah District
South Atlantic Division*

Record of Interagency Coordination

TABLE OF CONTENTS

TOPIC	PAGE
I. Hydrodynamic and Water Quality Model Development	1
II. Environmental Resources	35
A. Marsh Succession.....	36
B. Wetlands	36
C. Fisheries	203
D. Water Quality	309
E. Groundwater Aquifer	499
F. Mitigation Plans	507
G. Multiple Resources	529
III. Lead and Cooperating Agencies	537
IV. Executive Management Group	696
Attachment 1: Correspondence with SC DHEC concerning Water Quality Certification and Coastal Zone Management Consistency	

I. Hydrodynamic and Water Quality Model Development

1. MFR dated 23 May 2000, SHEP, Multi-Agency Meeting, Savannah River Hydrodynamic Model, Savannah Harbor (SHE) Project, Georgia and South Carolina.
2. MFR dated 18 January 2002, SHEP, SMART meeting, 12 December 2001
3. MFR dated 7 March 2002, SHEP, SMART meeting, 28 February 2002
4. MFR dated 1 May 2002, SHEP, SMART meeting 30 April 2002
5. MFR dated 18 June 2002, SHEP, SMART meeting; SH Expansion Project, 6 June 02
6. MFR dated 16 May 2003, SHEP, Summary of 7 May 03 SMART meeting
7. MFR dated 8 March 04, Revised 18 March 04, SHEP, Summary of 3 Mar 04 SMART meeting.
8. MFR Draft dated 19 May 04, Final dated 15 June 04. Federal Agencies Responses to Questions and Uncertainties Raised in Georgia Port Authority's Letter of 11 May 2004.
9. E-MAIL from EPA, Heinz Mueller, dated 2 April 2007, SHEP, Decision on Model-To-Marsh proposal.
10. E-MAIL from Thomas A. Garrett, SAS dated 2 April 07, SHEP, Decision on M2M
11. E-MAIL from Joseph T. Hoke, SAW@SAS dated 2 April 07, SHEP, Decision on M2M
12. E-MAIL from Ed Eudaly@fws.gov, dated 27 March 2007, SHEP, Decision on Model-To-Marsh Revisions.
13. E-MAIL from Kay Davy, NOAA, dated 22 March 2007, SHEP, Decision of Model-To-Marsh Revisions.

MEMORANDUM FOR RECORD

SUBJECT: Multi-Agency Meeting, Savannah River Hydrodynamic Model, Savannah Harbor Expansion (SHE) Project, Georgia and South Carolina

1. At the request of the EPA, a multi-agency meeting of the Federal Agencies associated with the SHE project was held on Tuesday, 22 May 2000 at the Offices of the U.S. Fish & Wildlife Service to discuss concerns that have surfaced in regard to the subject model. In attendance were the following:

Douglas H. Plachy	U.S. Army Corps of Engineers (CESAS-PM-CN)
William G. Bailey	U.S. Army Corps of Engineers (CESAS-PD-E)
Susan E. Durden	U.S. Army Corps of Engineers (CESAS-PD-PF)
Ed EuDaly	U.S. Fish & Wildlife Service
Wiley Kitchens	University of Florida (U.S. Fish & Wildlife Service)
Paul Conrads	U.S. Geological Survey
Jim Greenfield	U.S. Environmental Protection Agency

[It should be noted that the attendees typically referred to "GPA" during the meeting in lieu of specific firms when referencing discussions with one of GPA's contractors since it is GPA that is funding and controlling the various contractors and since it is GPA that is ultimately accountable for the contractor's actions.]

2. It was understood that the initial goal of the subject model was to provide a method for predicting numerical values for physical parameters that may change as a result of alterations to the Savannah River. However, there is now great concern regarding the technical adequacy of the model and whether it will have the ability to accurately predict changes in the ecosystem, i.e., water levels, dissolved oxygen (DO), salinity, etc. Several examples were given such as:

a. The water levels have been off (and still are) by as much as 1 meter. It was stated that the tolerance should be no greater than +/- 3 inches. This is in light of the fact that changes of water level of only 1/2 inch can cause major impacts to the species of vegetation growing in the marsh.

b. The model does fine at and/or near the boundary condition, but gets worse the farther you go upriver away from the boundary. A potential problem may be that the model is build upon an estuary model rather than a riverine model.

c. A sensitivity analysis has not been done. This is a key aspect to model development.

CESAS-PM-CN

SUBJECT: Multi-Agency Meeting, Savannah River Hydrodynamic Model, Savannah Harbor Expansion Project (SHE), Georgia and South Carolina

d. The convergence test specifically requested by the Corps has not been done to validate the grid resolution. It was noted that ATM had in the past discussed reducing the grid resolution without knowing the convergence.

e. The model has been inconsistent, i.e., sometimes it under predicts and sometimes it over predicts. Therefore, as it currently exists, it is unreliable as a tool to assess impacts of "what if" conditions.

f. To be an adequate tool for assessing impacts, the peaks and ravines are just as important as the mean. Currently, the model has only marginally met the mean and has substantially missed the peaks and ravines. Are the problems due to limitations of the model itself (i.e., WQMAP), application of the model set up and calibration, or skill of the modelers?

3. There was extensive discussion in regard to GPA's unwillingness to provide the Federal Agencies direct access to the model. Although there had been a meeting in Atlanta prior to the last MTRG meeting to discuss the access issue, it is clear that the parties left that meeting with different understandings of the decisions and commitments made. The agencies need access to the model ASAP in order to assess & determine what may be causing the model not to perform as expected. The undersigned relayed the conversations he had with GPA shortly after the last MTRG meeting wherein it was stated by ATM that the model would be provided to EPA, etc., post calibration, i.e., not anytime soon. GPA's understanding is that EPA wants access to the model for DO and TMDL work unrelated to the SHE project. It was not understood that it was not possible for the agencies to accept the model (as it currently exists).

4. It was clear from the discussions that the Federal Agencies are not attempting to impede the development of the model, but wish to help to ensure that the model is as accurate and complete as possible. It was understood that without a good model, it would be very hard to grasp the potential impacts of any changes to the navigation channel. In this regard there was frustration on the part of the Federal Agencies over the following issues:

a. Requests for the 1999 data set, i.e., the electronic version of the processed data have gone unanswered. It was noted at the meeting by the undersigned that GPA might not have been aware that the agencies have requested the data set.

b. ATM has been selective in regard to what they choose to show the Federal Agencies at the MTRG meetings.

CESAS-PM-CN

SUBJECT: Multi-Agency Meeting, Savannah River Hydrodynamic Model, Savannah Harbor Expansion Project (SHE), Georgia and South Carolina

c. Dialogue and Feedback to the MTRG has changed (in a negative way) since the departure of the original ATM modelers.

d. There is the perception of "obstructionist behavior" on the part of GPA's contractors.

5. Several courses of action were discussed ranging from starting all over with the development of a new model to completely giving up on attempting to model the Savannah River. However, it was eventually decided that the Federal Agencies would put together some very precise and explicit criteria a.k.a. goalposts, which clearly defines what specifically the model must provide in order to be used to assess potential impacts. (It was noted that this information should have been provided/requested very early on in the development process.) This set of requirements would be staffed by the Federal Agencies and then provided to the MTRG for discussion at the next scheduled meeting.

6. In addition to the above, it was also agreed that the Federal Agencies would renew their requests to obtain from GPA:

a. An electronic data set of the processed 1999 data collection. Since State funds were used to obtain this data set, it is felt that there should not be a problem with it being placed in the public domain.

b. Direct access to the model in order to attempt to determine why the model has not performed as expected. This will be necessary before any of the agencies would consider signing off on the calibration. It was stated by the undersigned at the meeting that GPA requested in April that ATM determine how to go about providing direct access of the model to the Federal Agencies.

7. The information stated above is that of the undersigned's comprehension, and may not be the consensus of all of the Federal Agencies.

/s/ H. Plachy/ 26 May 01

DOUGLAS H. PLACHY
Senior Project Manager
Navigation & Coastal Projects Team
Civil Works Branch, PPMD

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project; SMART meeting

DATE: 12 December 2001

LOCATION: EPA, Atlanta

PARTICIPANTS:

Jim Greenfield	EPA
Paul Conrads	USGS
William Bailey	USACE
Danny Mendelsohn	ASA
Bo Ellis	ATM
Eduardo Yassuda	ASATM
Matt Goodrich	ATM

BACKGROUND: This was the second meeting of the Savannah Multi-Agency Review Team (SMART) to review and discuss ATM's progress on the hydrodynamic modeling that they are conducting for GPA on the Expansion Project. The SMART is composed of technical modeling experts from EPA (Jim Greenfield), USGS (Paul Conrads) representing the USFWS, and USACE (Sung-Chan Kim), and myself. The NMFS is kept informed of the SMART meetings and any conclusions that are reached, but the NMFS has declined to participate directly, relying instead on the views of the USFWS. The SMART was formed to assist ATM/GPA in the final stages of their model development. The intention is for the SMART to meet on a regular basis to discuss direction, ideas, developments and generally to coordinate the calibration development activities.

MEETING HIGHLIGHTS:

1. Danny Mendelsohn (ASA/ATM) gave an update of his efforts on the Hydro model calibration. He reported primarily on his efforts on the temperature portion of the model.
 - (A) He had tried the 25% shading of the upper river (Clyo to the harbor) that the SMART had recommended at its previous meeting. He said that the model's calculated values were still substantially higher than the data.
 - (B) The group suggested he try higher shading values, up to a 50% level. They thought that value would be acceptable since the river is relatively narrow with trees lining both banks.

- (C) No new input data had been obtained on the heat release for the SEPCO power plant in the harbor. ATM will check further to try to obtain or develop input values for this feature.
2. Danny then briefly discussed the salinity portion of the model.
 - (A) The group agreed that the model output should be in 1-hour time steps. More detailed information would not be particularly useful in evaluating impacts.
 - (B) The group agreed that Danny should adjust the model to correct for any error in phase before statistics are run on the calibration. In addition to reporting the statistic, the phase correction applied will be reported.
 3. At this point, the following looks reasonable as a schedule for progress on the Hydro model: Preliminary calibration in February and final calibration in March.
 4. Eduardo Yassuda (ASATM) then gave an update of his efforts on the Dissolved Oxygen model.
 - (A) He has begun reviewing the D.O. data.
 - (B) EPA/GADNR will provide upstream input data from their model of the Savannah River by the February meeting. ATM needs to include this in their model.
 - (C) Eduardo will also present statistics on the model performance in terms of D.O. deficit.
 - (D) The Corps will write (email) ATM requesting that model be capable of using 2 CBOD degradation rate constants. Including this capability now would save valuable time later if the initial calibration is inadequate using only a single rate. The modeler's time would be saved during the critical period later in the calibration process.
 5. The group agreed to meet again in February. The SMART would meet on the afternoon of the 12th, and the MTRG would meet on the morning of the 13th.

William Bailey
PD-E

CESAS-PD-E

7 March 2002

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project; SMART meeting

DATE: 28 February 2002

LOCATION: EPA, Atlanta

PARTICIPANTS:

Jim Greenfield	EPA
Paul Conrads	USGS
William Bailey	USACE-SAS
Dr. Sung-Chan Kim	USACE-ERDC
Danny Mendelsohn	ASA
Bo Ellis	ATM
Matt Goodrich	ATM
Chris Ahern	ATM

MEETING HIGHLIGHTS:

1. Danny Mendelsohn (ASA/ATM) gave an update of his efforts on calibration of the Hydro model.
 - (A) He said he still had a problem with water surface elevation at Clio because the model would not allow him to raise the bottom elevation the 12-13 foot distance the river actually has climbed by that point. This boundary problem elevation offset is completely resolved by GPA-17 (i.e. GPA-17 surface elevation is correct and no effect from GPA-17 south). Therefore, this should not affect the model's usefulness in making predictions below I-95.
 - (B) He is continuing to make minor adjustments to the model to increase its performance.
 - (C) For the calibration period (1999), he will use the time periods when data exists for the offshore boundary.
 - (D) He will display the model's performance statistics by river mile.
 - (E) He will show time series comparisons for the entire duration of the model run.
 - (F) The Approval Package should contain information on the convergence testing, as well as the sensitivity items listed at the end of the Expectations Document.
 - (G) The comparisons to the Expectations Document will be based on results from the model or – if needed – from any transfer function.
 - (H) For the Approval Package, the Federal agencies will email to the Corps what they want to see in the package. The agencies will want a hard copy of the Approval Package and an updated version of the model. The packages will be sent directly to the agencies to speed their review.

2. Matt Goodrich (ATM) then discussed the transfer function that he was developing.
- (A) He is using a state-spaces model, which is different from a neural network.
 - (B) ATM will develop and apply a transfer function whenever a model does not reasonably meet the Expectations Document.
 - (C) ATM will need to identify how it will develop data between the stations. They may use linear interpolation.
 - (D) The Approval Package should include the performance both without the transfer function and with the function, to demonstrate the improvements that the additional work (through this technique) provide.
3. Chris Ahern (ATM) then gave an update of their efforts on the Dissolved Oxygen model.
- (A) D.O. in Savannah Harbor is influenced by:
 - Temperature
 - Freshwater flows (as measured at Clio)
 - Tidal amplitude (Spring / Neap)
 - Marsh loading & Point source loading
 - Primary productivity
 - (B) Neaps are periods of greatest D.O. sag because of the reduced mixing.
 - (C) GPA-6 shows the largest difference in D.O. saturation between the surface and the bottom.
 - (D) During the data collection, Chris noticed that the Secchi Depth was greater by about 1/3 meter if they used the shaded side of the boat. He theorized that on the sunny side of the boat, the suspended clays refracted the light more, reducing its penetration. ATM did use the standard procedure (sunny side) when they collected the data for this project.
4. ATM will pursue the following schedule:
- | | |
|---------------------------------------|------------------------------|
| Submit Approval Package | end of March |
| First look at D.O. model | end of April |
| Transfer of initial D.O. model to EPA | end of April |
| MTRG meeting | April 30 th 10 AM |
| SMART meeting | May 1 9 AM |
| Letters from Federal agencies | end of May (60 day review) |
| Completion of D.O. model | end of June (3 months) |
| (Submission of Approval Package) | |

William Bailey
PD-E

CESAS-PD-E

1 May 2002

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project; 30 April SMART meeting

1. A SMART meeting was held on 30 April 2002, after completion of the MTRG. The following people attended:

Jim Greenfield	EPA
Paul Conrads	USGS
Dr. Sung-Chan Kim	USACE-ERDC
William Bailey	USACE-SAS
Larry Keegan	Lockwood-Greene
Bo Ellis	ATM
Matt Goodrich	ATM
Dan Mendelsohn	ASA
Eduardo Yassuda	ASATM

2. The group discussed comparing the Transfer Functions for salinity to conditions that existed prior to the 1993-1994 deepening project. The group decided, instead, that ATM will first look at the effects of further deepening of the channel to ascertain the extent to which such deepening alters the present trends and patterns of tidal flows and forcing. If such deepening would not appear to substantially alter the present trends and patterns, then the group would have more confidence that the physics represented by the salinity Transfer Functions would still be applicable with the proposed changes in river geometry.

3. ATM agreed to provide the Federal agencies with the following additional information to aid their review of the Hydrodynamic and Salinity Model. This information will be provided by 14 May:

A. Comparisons of the model to data at the USGS stations. This had been inadvertently left out of the Approval Package.

B. ATM will develop Transfer Functions for all or most of the 1999 data stations. An explanation will be provided where Transfer Functions are not developed.

C. ATM will perform a sensitivity analysis to evaluate the model's sensitivity to river depth where water levels do not match well. They will run the model twice; first with a ½ meter increase in depth, and then with a ½ meter decrease in depth. They will report only the statistics of the model's performance.

4. The group discussed Convergence Testing. No additional work was done on this issue after the March 2001 Calibration Report. Information in that report should be used to assess the model's performance on this issue. Danny will review Figure 5-4c from that

report and provide additional explanation on why ATM believes the convergence is acceptable.

5. The group discussed the link between the Hydro Model and the D.O. Model. ASATM will check salinity movement in the D.O. Model early in their development of that model to ensure both models are moving salinity the same.

6. The next meeting will be the afternoon of June 6th, after the MTRG meeting. The group will provide initial responses to morning's presentation of the D.O. Model, and discuss Critical Conditions for application of the models.

William Bailey
Physical Scientist

CESAS-PD-E

18 June 02

MEMORANDUM FOR RECORD

SUBJECT: Summary of 6 June SMART meeting; SH Expansion Project

1. Attendees:
 EPA: Jim Greenfield
 USGS: Paul Conrads
 COE: Bill Bailey
 GPA: Larry Keegan; Bo Ellis; Danny Mendelsohn; Eduardo Yasuda
2. We started by reviewing the position of EPA on the model. Jim stated that the model was sufficiently calibrated to proceed to D.O. modeling. He also stated that EPA would defer to the USFWS on utility of the model (salinity and water levels) to address impacts to the marshes.
3. We discussed **Convergence Testing**.
 I stated that CEWES was satisfied with the information ASA/ATM had provided.
 Paul stated that USGS needed the following additional information: results of convergence both longitudinal and width testing for Water Levels, Currents, and Salinity on grids for the Front River and Back River. An idealized grid would be acceptable. He went on to state that the downstream flow rate used in previous convergence tests appeared low (1/2 the normal flow at Augusta). He stated that the new testing needed to either be performed with 2 flow rates or a variation in flows that include normal downstream flows. ASA did not need to run 2 flow rates on the grid for Back River.
 I commented that the previous convergence testing results appear to indicate that model results stabilize after a certain modeling duration. The group agreed that to increase confidence in the model results, application runs of the Hydro & Salinity Model would use a 25-day ramp-up period before output data is recorded. ASA/ATM could accomplish this by adding a synthetic set of data at the beginning to allow the model to stabilize prior to recording outputs.
4. We discussed **Water Surface Elevations**.
 EPA and the USGS agreed that ASA/ATM needed to provide additional information to describe how remaining errors in the model results will be accounted for (process or methodology) as they are used in follow-on modeling and/or during application runs. Paul stated he would check with USFWS to ensure this position was acceptable to them.
 I stated that it was likely that the Corps would not state that the model is acceptable for assessment of wetland impacts until we saw the results of the accounting for the remaining errors and the extent of the correction.
5. We discussed the USFWS concerns about the accuracy of both salinity and water surface elevations.
 Paul stated that he thought that the USFWS just wanted to make sure that any improvements made in the Hydro Model's ability to predict water surface elevations would not

be made at the expense of accuracy on salinity predictions. ATM will provide additional information regarding the effect that any process used to account for remaining errors in water surface elevations is likely to have on salinity predictions.

6. We discussed **Current Predictions**.

Danny stated that GPA 14 was a station where the currents were altered by the orientation of the structure and adjacent structures. Therefore, the data on currents obtained from that station is not reliable and was not used.

ATM agreed to provide statistics and graphs on currents for both the 1997 and 1999 data collection periods. This would include model to data comparisons.

Paul will check with Ed Eudaly to ensure that additional data is all he needs, or if the USFWS is particularly concerned with the model's present level of accuracy.

The Expectations Document included goals of +/- 25% for currents. Danny stated he believes the model results are within that range.

7. We discussed **Volume Flux**.

No time series plots are available. ATM will provide new information in the new package on this issue. This data will include model to data comparisons and plots of the data. ASA believes the new information demonstrates that the model's performance has improved on this issue.

8. **Agreements.**

A) ATM will provide a revised acceptance package that acknowledges additional processing is needed to provide usable input for evaluation of wetland impacts. It will include all revisions, updates, errata sheets and new information provided since the original April 2, 2002 document.

B) ATM will work to develop post processing techniques for water level output from the Hydrodynamic and Salinity Model.

C) USGS and the USFWS will arrange a meeting to discuss water level accuracy requirements and possible ways to reach them. Expected attendees will be Danny Mendelsohn, Paul Conrads, Bo Ellis, John Bossart, Wiley Kitchens, Ed Eudaly and Bill Bailey.

William Bailey
Environmental Resources Branch

CESAS-PD-E

16 May 03

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 7 May SMART Meeting

1. Attendees:
 EPA: Jim Greenfield
 Steve Whitlock
 USGS Paul Conrads
 ATM/GPA: Steve Peene & Bo Ellis
 Danny Mendelsohn, Henry Rines & Tom Gallagher
 LGE/GPA: Larry Keegan
 COE: Doug Plachy
 Sung-Chan Kim
 Bill Bailey
2. A copy of the agenda is attached.
3. I opened the meeting by stating that ATM wanted us to review what they were doing leading to calibration of the D.O. Model, provide them with guidance, and inform the group if anything they are doing may be unacceptable to our agencies.
4. We began by discussing the schedule. The Characterization Report would be used to develop the Base Case. ATM is not waiting for anyone to proceed in their calibration work. We will meet again on June 18 to discuss the interim calibration. The Draft D.O. Calibration Report will be delivered on 1 August. We will meet on 7 August to discuss the report.
5. We briefly discussed the goals of the calibration. That is to meet the meet the +/- 0.2 mg/l dissolved oxygen and D.O. deficit stated in the Expectation Document produced by the SMART in 2001.
6. Henry Rines presented the findings in their **Draft D.O. Characterization Report**. Concerning **Primary Productivity**, it appears that algal production is not a major factor within the estuary. The D.O. data do not demonstrate a marked diurnal cycle. Algae enter the estuary from upriver and the ocean, but the low light penetration appears to limit productivity within the harbor area. ATM will use Chlorophyll as a boundary condition, with inputs at levels observed levels and not model chlorophyll production within the estuary. ATM will expand the Characterization Report to include a historical analysis of chlorophyll data. ATM will perform a sensitivity analysis of the chlorophyll boundary values. They will examine D.O., BOD distribution, and Nitrogen distribution.

Concerning **BOD**, the data values are close to the detection limits and within the variability of the test at those levels. Therefore, there do not appear to be any marked differences between the values for BOD5, CBOD5, and LTBD5. The decay rates do not demonstrate a pattern by location (Table 4-1). ATM will look at decay rates from the marshes by Freshwater, Brackish, and Saltwater zones.

Concerning the **marshes**, the marshes appear to consume D.O. and nitrate, and (possibly) export Ammonia, Organic Nitrogen, and BOD. Paul Conrads will send Chapter 5 of the Characterization Report to Ed Eudaly of the USFWS.

Concerning **Longitudinal Profiles**, the data showed what the reviewers expected.

Concerning **SOD**, the highest values were reported in the Kings Island Turning Basin. A 1985 study showed increases in ammonia in the sediment chamber. ATM will include this information in their calibration work. The "Redfield Ratio" of N-P-K in phytoplankton was offered as an initial measure of the carbon ratio for wetland vegetation.

Concerning **Instream D.O.**, both the upstream river and the ocean appeared to be well oxygenated. Lower D.O. values were observed in the middle of the harbor. Tidal variations in D.O. were observed. Stratification varies with the range of tide. The D.O. data shows recurring sharp (short term) drops in D.O. at slack tides. The group agreed that the data appear to be a sampling artifact or probe fouling problem, rather than a natural occurrence. EPA and USGS agreed that these spikes are most likely not real and should be deleted from the dataset.

7. ATM then discussed the **Base Case**. International Paper is by far the largest point source of CBOD. Flows from upstream and the marshes appear to provide the largest net CBOD loads to the estuary. The loadings given to ATM from MACTEC include short-term rainfall events during the period of the summer 1999 calibration. SOD is assumed to be equal across the width of the cross-section. We discussed the proposed ANN SOW. ATM and USGS agreed to review the SOW to separate out (and resubmit their proposal to GPA) any portions that appear to be more important – possibly that dealing with the offshore boundary. ATM in conjunction with USGS and EPA will submit a justification write up for the ANN data analysis.

8. ATM then discussed the availability of the model. Steve Peene stated that the model could be used by EPA, USGS and COE for any simulation within the Savannah River estuary. EPA stated they need full public access to the model if it is part of their Administrative Record for their TMDL. Steve will meet with ASA soon and discuss what EPA needs. ATM also discussed the limitations on the number of machines that USGS, EPA, and COE can presently use the model on. Steve will also address this issue with ASA.

9. ATM then provided an example of the costs for running the H&S and D.O. Models. A \$4,000 per run cost was given as an average value. This was based upon a mid-level complexity run and the costs would be variable depending on the number of runs needed. It was discussed that there will be a considerable economy of scale to be had in reducing costs if the number of runs becomes large.

10. At the beginning of the next day we discussed two items: (1) the schedule for completion of the D.O. Model, and (2) communication. The schedule that was developed is included as Enclosure 2. As part of this discussion, it was agreed that the D.O. Model Calibration Report (draft and final) and the Hydro Model Calibration Report would be distributed to the agencies in both hard copy and CD. A CD would be included with each hard copy report. It was also agreed that the models themselves would be included with the Final Calibration Reports that are delivered to agencies for final agency approvals. The group agreed to enhance communications by including more team members when the discussions were more than technical modeling issues or interagency deliberations.

Enclosures

William Bailey
Environmental Resources Branch

SAVANNAH HARBOR EXPANSION PROJECT

SMART MEETING

MAY 7, 2003

AGENDA

MORNING

D.O. Characterization Report ATM (2 hours)

AFTERNOON

“Base Case” Conditions for Calibration ATM lead

- Boundary Conditions
- Loading
- Constants & Coefficients

Acceptability Criteria/Goals Bill Bailey

Schedule for completion of D.O. Model ATM

- Interim Checkpoints

Application of the models ATM

- Time & costs per run (including analysis)
- SH Expansion and other projects

Open Discussion All (1 hour)

SCHEDULE FOR COMPLETION
OF
DISSOLVED OXYGEN MODEL

ID	Task Name	Duration	Start Date	End Date
87	Dissolved Oxygen Distribution Evaluation	1855 d	6-Apr-1999	3-May-2004
88	Develop Dissolved Oxygen Model	1720 d	6-Apr-1999	20-Dec-2003
89	Dissolved oxygen & sedimentation field data collection	210 d	6-Apr-1999	1-Nov-1999
90	Vertical & lateral dissolved oxygen profiling	120 d	5-Jun-1999	2-Oct-1999
91	Dissolved Oxygen model calibration	243 d	3-Feb-2003	3-Oct-2003
92	Evaluation of EPA-GAEPD RIV1	60 d	3-Feb-2003	3-Apr-2003
93	WQ model boundary conditions and loading evaluation - draft	94 d	3-Feb-2003	7-May-2003
94	WQ model boundary conditions and loading evaluation - final	42 d	8-May-2003	18-Jun-2003
95	Evaluate marsh boundary influence - draft	136 d	3-Feb-2003	18-Jun-2003
96	Evaluate marsh boundary influence - final	44 d	19-Jun-2003	1-Aug-2003
97	Evaluate rate constants and coefficients - draft	94 d	3-Feb-2003	7-May-2003
98	Evaluate rate constants and coefficients - final	42 d	8-May-2003	18-Jun-2003
99	DO characterization study	89 d	3-Feb-2003	2-May-2003
100	Investigate DO ANN	94 d	3-Feb-2003	7-May-2003
101	BMD output post processor	136 d	3-Feb-2003	18-Jun-2003
102	Implement upstream time series boundary	94 d	3-Feb-2003	7-May-2003
103	Develop segmentation and time averaging tool	136 d	3-Feb-2003	18-Jun-2003
104	Deliver DO model calibration letter report	1 d	11-Jun-2003	11-Jun-2003
105	Preliminary DO model calibration meeting	1 d	18-Jun-2003	18-Jun-2003
106	Scoping level analysis of bio-impacts model	16 d	21-Aug-2003	5-Sep-2003
107	Draft DO Model calibration report	180 d	3-Feb-2003	1-Aug-2003
108	Prepare draft H & S calibration report	35 d	2-Aug-2003	5-Sep-2003
109	DO model draft report meeting	1 d	20-Aug-2003	20-Aug-2003
110	Sensitivity study	79 d	15-May-2003	1-Aug-2003
111	Final DO Model calibration report	44 d	21-Aug-2003	3-Oct-2003
112	Federal agency (SMART) formal calibration evaluation	60 d	3-Oct-2003	2-Dec-2003
113	Dissolved Oxygen model calibration accepted by SMART	1 d	3-Dec-2003	3-Dec-2003
114	Federal agency (SMART) review of H & S calibration	30 d	6-Sep-2003	5-Oct-2003
115	Prepare final report of H&S model calibration	30 d	5-Oct-2003	4-Nov-2003
116	Agency review of DO and H & S model calibration report	45 d	4-Nov-2003	19-Dec-2003
117	Agency DO and H & S model performance acceptance and documentation	1 d	19-Dec-2003	20-Dec-2003

CESAS-PD-E

8 March 04
Revised 18 March 04

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 3 March SMART Meeting

1. Attendees:

EPA:	Jim Greenfield
	Steve Whitlock
	Earl Hayter
USGS	Paul Conrads
COE:	Doug Plachy
	Sung-Chan Kim
	Bill Bailey

2. This summary is an overview of the critical issues discussed and decided at the meeting. It does not represent all the discussions that were held during the course of the meeting.

3. Dr. Kim had gotten the Hydro Model working, although it took several communications with Danny to learn items that were not included on the CDs or in the report.

Dr. Kim had examined the hindcast that ATM had used to support the validity of the vertical mixing approach with other channel depths. ATM had examined how well their vertical mixing approach would have matched those from a multivariate approach. Dr. Kim explained that the Final Report did not compare sites with a large difference in calculated values between the two approaches, but instead chose a location where they did not differ by much. Even so, the values for mixing differed by a factor of 1.6 to 2. So Dr. Kim's assessment was that the hindcast did not demonstrate that the approach used in the Final Calibration Report reasonably matched conditions that occurred prior to the last harbor deepening. Therefore, the hindcast did not prove the present vertical mixing approach worked with different channel depths.

4. Paul Conrads discussed his findings about how vertical mixing was calculated in the model. Based on information provided by Danny (not in the Final Calibration Report), the final value of vertical diffusivity (D_v) is based on two computations within Equation 5 using two sets of coefficients. Calculations are performed on both equations and then the highest value is selected for use in the model. Each equation uses a smoothed tidal range computed for each time step and calculates vertical mixing based on the tidal height. Although only small differences in tide height may exist between certain periods (especially for maximum tidal ranges), the exponential nature of the equations

sometimes results in significant differences in the calculated values for mixing between those days. The group felt that tidal energy, rather than tide height, may have been a more realistic parameter to calculate vertical mixing.

The group discussed the offsets that ATM added to both of the vertical mixing equations. (A different offset was used for 1997 than for 1999.) The group felt that since the offset was dependent upon the tidal conditions present at that specific time, that the offset to be used when the model is being applied in a predictive mode could not be known. This significantly reduces the utility of the model for predictive purposes. Paul also explained that a second offset was applied to the equation for the 1999 conditions. This second offset made the reviewers question the technical validity of the approach, as the approach appeared to be an exercise in curve-fitting. (After the meeting, the group realized that the additional constant was applied to both the 1999 and 1997 time series. A correction to the discussion was sent out to the attendees of the meeting.)

Paul described that Danny had smoothed the tide heights (three iterations) to obtain a better curve for the vertical mixing. He explained how he had investigated the effects of this smoothing. Smoothing reduces the tidal range for that period. Paul showed how the peak in vertical mixing would be about 1/3 higher if the smoothing had been performed after the calculations had been made, rather than before. The result of that investigation is that the vertical mixing values are very sensitive to how they are derived.

5. The group concluded that the turbulence equation used in the Hydro Model is different from the one cited and previously applied. (This issue is included in Appendix BB of the Hydro Model Calibration Report.) Since it is a different equation, the proponent for use of the new equation must justify its technical validity. EPA, USGS, and ERDC each stated that explanation in the Final Report did not sufficiently demonstrate the technical validity of that equation. The description in Appendix Q of the application of the vertical mixing scheme to Savannah Harbor was inadequate.

6. The group discussed what uses they could support for the Hydrodynamic & Salinity Model. They concluded the model could be used for examination of (1) conditions that occurred during the periods over which observations were recorded (summers of 1997 and 1999), (2) velocities and water levels with flows up to about 15,000 CFS, and (3) parameters based on the existing (1997/1999) channel bathymetry.

7. The group concluded that the vertical mixing approach was not physics-based. Therefore, it couldn't be used to analyze changes in channel depth. It could only be used to examine conditions arising from the existing (1997/1999) channel bathymetry.

William Bailey
Environmental Resources Branch

CESAS-PM-CM

Draft: 19 May 2004

Final: 15 June 2004

MEMORANDUM FOR RECORD

SUBJECT: Federal Agencies Responses to Questions and Uncertainties Raised in Georgia Port Authority's Letter of 11 May 2004.

At the request of the US Environmental Protection Agency, National Marine Fisheries Service and US Fish and Wildlife Service points of contact, the Savannah Harbor Expansion Project Manager has prepared the following summary of responses to the comments/issues raised in the subject letter to the four Federal agencies.

Georgia Port Authority (GPA) Item 1. The review of the Plan A calibration has focused primarily on vertical mixing. Some recommendations have been identified to improve the Plan A model, but only preliminarily discussed with the reviewers. The review comments and agency letters did not specifically reference or discuss the latest documentation and testing provided for Plan A. Other concerns have also been identified, and the review remains unfinished. Consequently, it is impossible to understand the extent of work that would have to be done to revise Plan A, which renders an estimation of time and cost inaccurate.

Federal Agencies' Response: *The review of the Plan A calibration was focused on the vertical mixing scheme according to the established evaluation procedure. It was agreed by all parties that the evaluation would be done in phases. The first phase was to determine the technical defensibility of the vertical mixing scheme. No further review of the model would occur if the model did not satisfy this criterion. The Plan A vertical mixing scheme did not meet this criterion, therefore, according to the established evaluation procedure no further review of the remaining portions of the model occurred. As a result of several informal discussions, meetings, and detailed review comments on the January 2004 Final Calibration Report for Plan A, the agencies believe that GPA/ATM has sufficient information to determine what is needed to upgrade and further develop Plan A. It is apparent to the Federal agencies that GPA/ATM have been reluctant to accept the agencies' finding on the Plan A vertical mixing scheme and have focused their efforts on defending the current unique empirical approach to the Boundary Fitted Hydrodynamic/Water Quality Management and Analysis Package (BFHYDRO/WQMAP-GPA) model. Only recently has GPA/ATM agreed to look at using a more standard physics-based approach to the vertical mixing.*

While it may be possible to upgrade and further develop the Plan A models, the Federal agencies recommends that GPA take the following considerations into account before expending additional resources on such an effort;

1. The Federal and state agencies have made several recommendations to ATM for improving their model over the years and ATM has demonstrated a reluctance to accept these recommendations. It was only very recently that ATM agreed to consider the Federal and state

agencies recommendations, primarily as a result of the agencies' repeated concerns about the technical indefensibility of the Plan A model vertical mixing scheme. Given this lack of technical defensibility, and the fact that the physics-based vertical mixing scheme in Plan B appears to be defensible, the agencies lack confidence in ATM's ability to upgrade and further develop their current Plan A model in a timely and cost-effective manner.

2. Given the difficulties with the development of the BFHYDRO vertical mixing scheme is it worth pursuing another vertical mixing scheme for this model? According to ATM, it chose the empirical approach to the vertical mixing because it could not get a physics-based approach to work. The Plan B Environmental Fluid Dynamics Computer Code (EFDC) utilizes a physics-based approach and the vertical mixing scheme has been found to be technically defensible.

3. The developer of BFHYDRO/WQMAP, Applied Science Associates, will not support and defend these models due to the unique changes made by ATM. Would ASA support and defend the model after further upgrades by ATM?

GPA Item 2. GA EPD and SC DHEC have not provided detailed comments resulting from their review of the Plan A DO model. Their letters contain their conclusions but provide little to no insight into the basis for their conclusions. Their feedback is essential to estimating the revision work to be done. In the meeting on March 31st, the GA EPD representative stated that he was not prepared to comment on the DO model since he understood the focus was solely on vertical mixing.

Federal Agencies' Response: During the September 2003 and the April 2004 technical meetings, the specific problems with BFHYDRO/WQMAP-GPA Savannah Harbor application were listed by the Federal, state, and local agencies. Though the states did not provide a lot of detailed comments, they did indicate that there were problems with the Plan A model. Additionally, the states have made it clear that they were relying on the hydrodynamic modeling expertise of the Federal agencies. ATM and GPA should be able to put together the requirements for completing the Plan A Dissolved Oxygen model, by going back through the meeting notes from the Technical Advisory Group (TAG), Modeling Technical Review Group (MTRG) and Savannah Multi-agency Review Team (SMART) meetings. ATM contacted members of the review team after the April 7, 2004 Executive Management Group (EMG) meeting to solicit specific concerns with technical aspects of the model that would need to be addressed to fix BFHYDRO/WQMAP-GPA. These were extensive conversations and ATM should have sufficient information to develop a draft scope of work for review.

GPA Item 3. It appears, based on conversation between our consultants and some of the model reviewers, that there may be areas of misunderstanding or misinterpretation about what was done to calibrate Plan A. There has been little to no real time interaction subsequent to the distribution of the calibration report between the reviewers and the modelers who calibrated Plan A to identify, discuss and resolve them. The representative from GA EPD in the Water Quality Coordination Group meeting on March 31st made the point in his remarks that there had been very limited interaction for over the past two years regarding the DO model. It is essential that misunderstandings or poor reporting not be allowed to obscure the factual objections to the calibration of the Plan A models.

Federal Agencies' Response: As agreed upon by the Federal agencies and ATM, the final calibration report was to be the final basis for a decision – this was spelled out very clearly in the September 2003 meeting. A special meeting was arranged on March 31, 2004 to provide

ATM with another opportunity to clear up any misunderstandings, to ask any questions, and to clear up misstatements in the final report. At this meeting, ATM did not take the opportunity to review the individual comments of the reviewers. Rather than trying to create a better understanding of the Plan A model, new data was introduced which only served to raise further questions. At the March 31, 2004 meeting, EPA made it clear that it could not continue to expend resources on Plan A any longer and was moving forward with Plan B. The other Federal agencies agreed that Plan B should be given serious consideration as an alternative to Plan A.

GPA Item 4. Agencies rejected the Plan A model on the basis of an empirical approach to the vertical mixing component and stated that in using an empirical component, the model is valid for running tests only for those periods of time where conditions to be tested are the same as the field conditions that existed when field data were taken. Since the critical conditions to be tested are quite similar (or maybe nearly exactly the same) to those at the time the field data were gathered, will the model run results for the critical conditions be valid? If so, how would the decision process be enhanced by other tests for conditions that are not critical to the issues at hand?

Federal Agencies' Response: *The model reviewers have raised questions about the vertical mixing approach for the last three years. When the true empirical and curve-fitting nature of the BFHYDRO/WQMAP-GPA vertical mixing approach was finally documented in the January 2004 Final Calibration Report, which also showed that the previous documentation and technical "peer" reviewed papers contained an incomplete description of the vertical mixing scheme, the Federal agencies had no option but to determine that the hydrodynamic model was not technically defensible. The critical technical defensibility issue was the predictive nature of the vertical mixing routine to simulate a potential 6-foot deepening. The hindcasting tests showed different model performance for the 1999 calibration period and the 1999 hindcast test. One simulation over predicts the salinity at the Fish and Wildlife Service dock and one under predicts the salinity. The hindcast test does not support the calibration simulations. This disparity gives rise to the question of which is right? If the hindcast is correct, then the calibration and report are wrong. If the calibration is correct, then the hindcast is wrong. This makes it difficult to determine how the model be would applied to various project scenarios.*

GPA Item 5. EPA stated in its letter dated April 6, 2004: "With financial assistance from other Savannah Harbor stakeholders, EPA intends to expand the capabilities of these EPA models to evaluate the water quality and hydrologic impacts associated with the various harbor deepening alternatives. EPA will continue to cooperate with GPA, the Savannah District Army Corps of Engineers, and other stakeholders to support the EIS process." Should this be interpreted as meaning that EPA has already made its decision to employ the Plan B model relative to the Savannah Harbor Expansion Project and further discussion will not change it?

Federal Agencies' Response: *Given the lack of meaningful progress on the Plan A model and the reluctance of ATM to fully disclose the details of the Plan A model, EPA had no choice but to look at an alternative modeling approach to meet its court-mandated deadline. Since the fall of 2003, EPA has spent considerable time and resources developing the EFDC/Water Quality Analysis Simulation Program (WASP) model for establishing TMDL and water quality standards. EPA offered the use of this model as a contingency to Plan A for the SHE project. Given the same concerns about the lack of progress on Plan A for the SHE project, and the ongoing delays to the project schedule, the other Federal agencies agreed and this became the Plan B modeling approach. GPA/ATM have not been able to provide a technically defensible*

model that would meet the needs of the SHE project and the Plan B model meets the technically defensible criteria. Additionally, the Federal agencies have spent considerable time providing input to ATM during the development of the Plan A model. For the most part this input has not been appropriately considered. Also, the information provided by ATM has been incomplete or confusing, and there has been a reluctance by GPA/ATM to accept the agencies' position that the Plan A model is flawed. Given this historical pattern, the agencies are reluctant to proceed further with the development of the Plan A model. The Plan B model has passed the initial technical defensibility test and EPA's contractor appears to be willing to listen and adjust the Plan B model as needed. Therefore, the other Federal agencies see several advantages to the Plan B modeling approach and it is not just a matter of EPA driving this model selection for the SHE project.

GPA Item 6. Once there is a full understanding of the areas of the Plan A models that have to be revised, a proposed revision for each has to be developed. It is important to know if those proposed revisions, if carried out correctly, would be acceptable to the agencies before a decision to proceed with any of them can be made.

Federal Agencies' Response: *The first step would be to revise the vertical mixing scheme so that it is defensible. The Federal agencies believe that ATM has sufficient information to know what is required to accomplish this. Once this criterion has been satisfied then other portions of the model can be reviewed in more detail to determine what revisions are needed. The critical issue is that the modification to the vertical mixing approach would have to be done correctly and be subject another round of review. As the minutes of the various MTRG, TAG, and SMART meetings demonstrate, the agencies have patiently reviewed key aspects of model development with ATM, such as basic calibration of a water quality model (MTRG meeting with review of calibration approach with Eduardo Yasuda). However, ATM chose not to follow this advice and guidance. At the March 31, 2004 meeting when ATM offered to modify the vertical mixing scheme to satisfy the Federal agencies, ATM was asked why the agencies should assume they would get it right this time. ATM had no response to this question and this is a crucial area of concern for the agencies. Successful upgrading and further development of the Plan A model would require a significant change in the way ATM has responded, in the past, to input from the Federal and state reviewing agencies.*

GPA Item 7. Two of the areas of concern expressed by the Federal agencies involved the modification of the BFHYDRO code in the calibration process and use of an empirical relationship. Consultants we have questioned indicate that it is common for modelers to modify code in the calibration process. It is important to understand how much modification of code is accepted modeling practice and when it exceeds those bounds resulting in a unique model. We have been informed that the empirical relationship in question has been used in the model and was discussed with model reviewers from the beginning of the MTRG process. It was recently determined to be unacceptable to each of the agencies. It is important to know how to make this aspect of the model acceptable to all of the agencies for the SHEP applications.

Federal Agencies' Response: *The issue is not that empirical approaches are unacceptable. The Federal agencies understand that there are valid empirical-based models. Acceptable empirical models for predictive purposes are those applied to a limited range of conditions or those that have been derived from extensive databases covering a very broad range of observed conditions. The ATM empirically-derived vertical mixing scheme meets neither of these conditions. The data used to derive the empirical vertical mixing scheme was limited to the summer and fall of 1997*

and 1999. These are typically low flow periods for the Savannah River and the particular sampling years had abnormally low flows. The application of the model would be limited to moderate and low flow periods. However, the SHE project needs to look at the full range of flow conditions of the river. Therefore, the Federal agencies do not believe that the unique BFHYDRO/WQMAP-GPA model will meet many of the project's needs.

Model modifications are how models are updated and new releases are created. The developer of BFHYDRO/WQMAP, ASA, does not stand behind modifications made to BFHYDRO/WQMAP-GPA for the Savannah application. They have not incorporated the ATM modifications into their release of their model. ASA views it as a unique application of BFHYDRO/WQMAP to Savannah and not one in the long history of peer-reviewed applications of their model. Also, ATM stated they tried other vertical mixing schemes and they did not work, although the Federal agencies were provided with no documentation supporting this statement. If ATM were correct that other physics-based vertical mixing methods do not work for the harbor, because of it's uniqueness, then the Federal agencies would be willing to use the best method available. Initially, the Federal agencies accepted ATM's statement about their attempts to work with other models. When EPA initiated Plan B (using EFDC because of its robustness in other areas), EPA discovered that the complex mixing scheme of the Savannah Harbor could be predicted by a physics-based vertical mixing scheme and that it was not necessary to use an empirical method. ATM was informed of this but refused to acknowledge this and continued to pursue their empirical method.

For the SHE project, an acceptable model would have to be shown to be technically defensible, tested against known test cases, and applied to other projects. This testing would have to include the vertical mixing, upper stream representation (including stream slope), and ability to handle marsh storage.

GPA Item 8. If a decision is made to modify the Plan A models, and the revisions that are made utilize acceptable methodologies that are properly implemented, the resulting model performance will have to be reevaluated against the Federal Expectations document goals in order to judge its acceptability. Until then, there is no conclusive information on which to judge performance.

Federal Agencies' Response: *Based on the established expectations and evaluation procedures, which GPA/ATM agreed to, performance goals do not come into play until the BFHYDRO/WQMAP-GPA model is technically defensible. According to the procedures, the BFHYDRO/WQMAP-GPA vertical mixing scheme had to first pass the technical defensibility test before looking at other portions of the model. A model with good performance, but lacking in technical defensibility does not serve the interests of EPA or the SHE Project.*

GPA Item 9. Until the technical objections to the Plan A and Plan B calibration are resolved, it is impossible to determine which model's performance comes closest to meeting the goals of the Federal Expectations document. Performance of each can only be judged if common criteria and goals are used.

Federal Agencies' Response: *The performance issue has been addressed in our response to GPA Item 8. The technical objections to the Plan A and Plan B model are not of the same order of magnitude. The objections to the Plan A model are related to fundamental problems with the modifications to the BFHYDRO code that render it technically indefensible. Based on the agreed upon phased evaluation, there was no point in evaluating Plan A's performance, when it could not pass the initial test of technical defensibility. The objections to the Plan B (EFDC and*

WASP) model are not related to technical defensibility, rather the need for finer grid resolution, boundary conditions, and how tide-marsh interactions are handled. EFDC and WASP have a proven record of being technically defensible and have gone through review in numerous other projects and other applications. A review of the calibration report for Plan B found that it can and does represent the physics of the Savannah Harbor stratification and de-stratification. Therefore, it has passed the initial test and additional development is warranted for comparison against the Federal Expectations Document.

GPA Item 10. Plan B is still an unknown entity. The results of agency review of the Hydrodynamic model are not available yet. The Water Quality model calibration has not been published yet.

***Federal Agencies' Response:** While the calibration of the water quality model is not yet finished, the agencies' review of the EFDC model is complete. The agencies have found that it meets the technical defensibility criterion and is therefore suitable for developing the water quality model. However, BFHYDRO has not passed the initial test and therefore is not suitable for developing the water quality model. Therefore, the unknowns are greater with the Plan A models than the Plan B models.*

GPA Item 11. The changes needed to Plan B to adapt them to meet the needs of the Savannah Harbor Expansion Project are unknown. Consequently, the time and cost to do so cannot be estimated. Until they are known, these factors cannot be considered in making a choice of the path forward.

***Federal Agencies' Response:** The Federal agencies believe the work needed to adapt the Plan B models to the SHE project are sufficiently known to compare and decide between modeling approaches. Although GPA/ATM, has not provided any estimates for revising Plan A, the Federal agencies have an understanding of what is required to revise Plan A and have obtained estimates from Tetra Tech for the additional work required for Plan B. This comparison indicates that the development costs and schedules would be about the same, given comparable assumptions.*

GPA Item 12. In part, the potential choices are being driven by a desire to use only one model for both the EPA's TMDL purposes and the Savannah Harbor Expansion Project's purposes. We should reexamine that goal to evaluate whether it is practical and its degree of necessity. Both projects (TMDL setting and SHEP) face the likely prospects of being challenged in court by powerful groups. The modeling, if it is a common element between the two projects, is a likely point of any challenge to come. Would it be better to not use common models for each project so that both are not stalled while legal challenges are resolved?

***Federal Agencies' Response:** The Federal and state agencies have expressed the preference to use one model for all harbor evaluations. EPA has been developing the Plan B models to meet its particular needs. However, adjustments were made to the Plan B model to determine if it could meet SHE project needs. The Plan B model has passed the initial test of technical defensibility and could be further modified to meet the remaining needs of SHE project. A multiple model approach runs the risk of having conflicting results that are not easily resolved and this can result in prolonged challenges. The concern with BFHYDRO/WQMAP-GPA is that it would not stand up to legal challenges. If a two-model approach were taken, the second model would have to be technically defensible (such as a proven model like Estuarine and Coastal Ocean Model- ECOM).*

GPA Item 13. The grid resolution employed for Plan A emerged after months of work with the Modeling Technical Review Group. Significant effort was expended, examining various degrees of resolution and testing the sensitivity of the model performance to them. The Plan B hydrodynamic model employs a much coarser grid resolution. How can this be reconciled with the MTRG identified needs for SHEP? How will that reconciliation be accomplished? What are the ramifications if a higher resolution grid has to be employed?

***Federal Agencies' Response:** The MTRG, SMART or TAG was not involved in the grid resolution. The agencies requested that ATM perform convergence testing to support their choice of a computational grid. Similar testing will be required of any model that is proposed for use on the SHE project. The results of that testing would be included in the final calibration report for the hydrodynamic model. The reviewers have found that the Plan B model is technically defensible with the coarser grid. Finer grid resolution is not going to change the defensibility of the Plan B model, and will likely increase its performance. Since EFDC is a public domain model, grid resolution or other adjustments can be made to suit individual users needs.*

GPA Item 14. The calibration of Plan A received years of intense scrutiny by both the MTRG and the SMART. Iterative testing of modifications, discussion and explanation of the calibration choices and their results, sensitivity testing, and statistical analysis all contributed to the understanding of the calibration. Similar scrutiny of the calibration of Plan B should be afforded the federal and state agencies, the MTRG members and the SEG members. How will that be accomplished?

***Federal Agencies' Response:** The intense scrutiny of the Plan A model was in large part the result of problems that arose with the Plan A model and the apparent lack of responsiveness by ATM to the concerns and advice of the reviewers. As problems continued to arise, with no apparent resolution, more and more of the reviewers' attention was required to address these and recommend corrective measures. The review of the January 2004 Final Calibration Report made it apparent to the reviewers that ATM had not taken advantage of the considerable effort and expertise of the reviewers to produce a technically defensible model.*

Plan B was developed to meet the needs that stakeholders brought up during the model discussions and this development is being conducted by people with substantial water quality modeling experience. For example, the WASP model has been adapted to include various reaeration options and multiple component BOD analysis. EPA is and will continue to hold technical meetings with the other agencies and the Harbor Committee that are involved in or potentially impacted by the TMDL development to assure that the hydro and water quality models are technically defensible and address the relevant issues.

GPA Item 15. The Plan A DO model calibration was done employing, in part, a "weight of evidence" approach suggested by EPA. Will a similar approach be followed in the case of the Plan B Water Quality model? Will the documentation be comparable to that available for Plan A? What is the cost to produce such documentation?

***Federal Agencies' Response:** Water quality experts will be conducting the Plan B modeling and they will be using normal modeling procedures, one of which is the weight of evidence approach. The model calibration will be documented accordingly. For any model that is proposed for use on the SHE project, the intent is to provide the same information to the reviewers on the development and performance of the model.*

GPA Item 16. Are there other alternatives that are viable that have yet to be identified?

Federal Agencies' Response: *There are several other alternative models that are available. However, use of another model would require additional development time and cost and there is no guarantee that it would be technically defensible. Considerable time and effort has already been expended on Plan B and the Federal and state agency reviewers have found that it is technically defensible.*

GPA Item 17. Plan A benefited from extensive effort and feedback from SEG members over a period of years. That cannot be ignored in our decision process. The adaptation of the Plan B models must consider all of that information.

Federal Agencies' Response: *There has been little effort or feedback on the model by the SEG members, other than through the MTRG, which was composed mainly of Federal and state agencies and chaired by ATM. Since the SMART was formed, the MTRG has been inactive. For the past few years, when the model was mentioned at the SEG meetings, there was a brief progress report by the ATM representative. This was followed by few, if any, follow-up questions. Also, no substantive discussion of model issues occurred after these brief reports. There has been no SEG consensus on the Plan A or the Plan B model.*

The developers (EPA/Tetra Tech) of the Plan B EFDC model have utilized information that the Federal agencies accumulated as a result of their participation in the Plan A model development. They will continue to consider all relevant and useful information as they proceed with further development of the Plan B model. EPA/Tetra Tech has already demonstrated their willingness to work with users/potential users of the Plan B model by working with the States of Georgia and South Carolina.

GPA Item 18. The choice of the modeling to be employed in the Savannah Harbor Expansion Project must be the appropriate and correct choice for the project's requirements. The appropriateness and correctness must be documented and demonstrated. While an attempt has been made to use the same model for both the SHEP and EPA efforts, there is no reason for the SHEP model selection to be driven by the court-mandated TMDL time line.

Federal Agencies' Response: *The Federal agencies agree that an appropriate model must be selected to meet the needs of the SHE Project and that its development and application must be appropriately documented. The lessons learned during the Plan A model development indicate that it was a lack of input on the model selection and appropriate and timely documentation that created the current difficulties. GPA/ATM did not involve the other stakeholders in the BFHYDRO/WQMAP model selection and BFHYDRO/WQMAP-GPA had to be modified extensively even to work, empirically, on the Savannah Harbor system. BFHYDRO was not then or is it now the only hydrodynamic model that could have been used. Also, the information provided to the stakeholders was often incomplete and untimely. It was not until the agencies received the January 2004 Final Calibration Report that they had sufficient information to understand the details of the Plan A model. Even as they reviewed this report, they found that it was not complete and additional information had to be obtained from GPA/ATM in order for the agencies to complete their review.*

Development of the BFHYDRO/WQMAP-GPA model was scheduled to have been completed years ago. The ongoing schedule slippage necessitated EPA developing a defensible model (EFDC/WASP) to meet the agency's more stringent time schedule. The EPA, Georgia Department of Natural Resources Environmental Protection Division, and South Carolina

Department of Health and Environmental Control have used the EFDC and WASP models on other projects. EFDC has proven that it has the appropriate physics-based mixing scheme, the models are public domain, and they are technically defensible. These models have demonstrated their versatility on a number of different projects and under a variety of conditions. Further refinement of the EFDC/WASP model to meet the needs of the SHE Project will build on EPA's Plan B modeling efforts and will not be constrained by the court-ordered TMDL mandate.

GPA-SEG: We met with members of the SHEP Stakeholders Evaluation Group (SEG) on May 3, 2004 to solicit their feedback. From that meeting, the following feedback emerged:

The risk and uncertainty inherent in the prediction of changes to the Savannah River estuary has not been addressed. Data that results from model simulation should be considered as a range of possible values, rather than point values. This range of values should be established as a part of the process for determining natural resource impacts and the sensitivity of predicted values to variation in input conditions should also be established.

Utilization of a single model for evaluation of impacts does not contribute to the reduction of uncertainty in the predictions. Consideration should be given to the use of a matrix of several models to determine the changes invoked in the with-project condition. If all predictions converge or cluster, the uncertainty in the accuracy of prediction is reduced. Utilization of just one model makes it more difficult to develop an understanding of the uncertainties and, consequently, the risks involved.

The SEG members clearly communicated their interest and desire to be afforded the opportunity to provide feedback for consideration in the decision process regarding the path forward for modeling. They have asked that they be kept apprised of the progress to a decision.

Federal Agencies' Response: *Agency reviewers attended this meeting and are aware of the discussion that took place on the multi-model approach. There was not a recommendation from the SEG, rather there was discussion and query regarding various modeling approaches. Individual SEG members requested or recommended certain actions, but as a SEG body they made no recommendations. The attending SEG members were informed that this multi-model approach has cost and schedule implications. The agencies see more difficulties with the multi-model approach than benefits, aside from the cost and schedule implications. However, the uncertainty and multi-parameter sensitivity analyses discussed at the SEG meeting will be considered and may be useful.*

The SEG was also informed that a decision would be forthcoming at the May 2004 EMG meeting and requested that a follow-up SEG meeting be held as early as June in order to discuss the outcome of this EMG meeting. The Federal agencies are prepared to attend this meeting and answer questions about the final decision. Copies of the decision document and support documents will be in the public domain and will be available to the SEG.

GPA General: None of the Cooperating Agencies will be prepared to proceed to decisions until understanding of the options and the contributing factors is sufficient to make informed choices. We respectfully request a full discussion of this subject at the Executive Management Group meeting on May 21, 2004, and development of an action plan for resolution of the concerns before proceeding to a decision.

Federal Agencies' Response: *The Federal agencies have carefully reviewed both the Plan A and Plan B calibration reports, the defensibility of these models, what is needed for upgrading and*


further development, the applicability of these models to the needs of the SHE project, and the historical problems with the Plan A development. They also have the requisite capability, knowledge, and expertise to understand the contributing factors and options. Therefore, the undersigned believe that the Federal agencies have sufficient information to make an informed decision on the Plan A and Plan B modeling approaches.



W. Kenneth Derickson, Ph.D.
Senior Project Manager

Agency POC Concurrence on Responses

U.S. Environmental Protection Agency

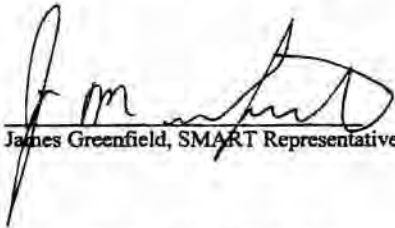

James Greenfield, SMART Representative

U.S. Fish and Wildlife Service



Edwin Eudaly, SMART Representative

National Marine Fisheries Service



Prescott Brownell, SMART Representative

Willett, Brenda W SAW

From: Mueller.Heinz@epamail.epa.gov
Sent: Monday, April 02, 2007 11:19 AM
To: Bailey, William G SAM@SAS
Cc: Welborn.Tom@epamail.epa.gov
Subject: RE: Savannah Harbor Expansion Project - Decision on Model-To-Marsh proposal

Bill, per our earlier e-mail, R4 concurs with your proposed approach.
 Heinz

"Bailey, William G SAM@SAS" <William.G.Bailey@epamail.epa.gov> y@epamail.epa.gov	Heinz Mueller/R4/USEPA/US@EPA	To cc
04/02/2007 11:12 AM	Subject RE: Savannah Harbor Expansion Project - Decision on Model-To-Marsh proposal	

Did you hear anything from Water Mgt Division?

BB
 -----Original Message-----
From: Mueller.Heinz@epamail.epa.gov
[mailto:Mueller.Heinz@epamail.epa.gov]
Sent: Thursday, March 29, 2007 11:47 AM
To: Bailey, William G SAM@SAS
Cc: Hamilton.John@epamail.epa.gov
Subject: Re: Savannah Harbor Expansion Project - Decision on Model-To-Marsh proposal

Yes Bill, the way Ted left it that unless I hear from the Water Div to the contrary by COB today, we will send you a concurrence e-mail tomorrow morning. HM

"Bailey, William G SAM@SAS" <William.G.Bailey@epamail.epa.gov> y@epamail.epa.gov	Heinz Mueller/R4/USEPA/US@EPA	To cc
03/29/2007 10:42 AM	Subject Savannah Harbor Expansion Project - Decision on Model-To-Marsh proposal	

Ted Bistereld said he would be out of the office this week and next. Is someone continuing actions to obtain an EPA position on my recommendation concerning the USGS proposal to modify the Model-To-Marsh linkage?

BB

Sent from my BlackBerry Wireless Device

Willet, Brenda W SAW

From: Garrett, Thomas A SAS
Sent: Monday, April 02, 2007 10:41 AM
To: Bailey, William G SAM@SAS
Subject: FW: SH Expansion - decision on M2M

Based on the meetings held on this subject and the opinions of the technical modellers, I concur that modification of the M2M is not necessary.

T. Alan Garrett
 Project Manager

-----Original Message-----

From: Hoke, Joseph T SAW@SAS
 Sent: Monday, April 02, 2007 7:44 AM
 To: Bailey, William G SAM@SAS; Garrett, Thomas A SAS
 Cc: Bradley, Kenneth P SAM
 Subject: RE: SH Expansion - decision on M2M

I concur that we do not need to modify the M2M. The alternatives that it was designed to address appear to be of little interest to the agencies now, given their impacts on tide range.

Joseph T. Hoke, Jr., P.E.
 Hydraulic Engineer
 U.S. Army Corps of Engineers
 Wilmington District (SAW-TS-EC)
 100 West Oglethorpe Ave.
 Savannah, GA 31401
 912-652-5516

-----Original Message-----

From: Bailey, William G SAM@SAS
 Sent: Tuesday, March 27, 2007 5:11 PM
 To: Garrett, Thomas A SAS
 Cc: Hoke, Joseph T SAW@SAS; Bradley, Kenneth P SAM
 Subject: SH Expansion - decision on M2M

I've received concurrence in my recommendation from 2 of the 3 agencies. The one I have not heard from is now out of the office for 2 weeks.

I have not heard from either of the 2 Corps folks included on the concurrence/non-concurrence list.

BB

 Sent from my BlackBerry Wireless Device

Willett, Brenda W SAW

From: Hoke, Joseph T SAW@SAS
Sent: Monday, April 02, 2007 7:44 AM
To: Bailey, William G SAM@SAS; Garrett, Thomas A SAS
Cc: Bradley, Kenneth P SAM
Subject: RE: SH Expansion - decision on M2M

I concur that we do not need to modify the M2M. The alternatives that it was designed to address appear to be of little interest to the agencies now, given their impacts on tide range.

Joseph T. Hoke, Jr., P.E.
 Hydraulic Engineer
 U.S. Army Corps of Engineers
 Wilmington District (SAW-TS-EC)
 100 West Oglethorpe Ave.
 Savannah, GA 31401
 912-652-5516

-----Original Message-----

From: Bailey, William G SAM@SAS
Sent: Tuesday, March 27, 2007 5:11 PM
To: Garrett, Thomas A SAS
Cc: Hoke, Joseph T SAW@SAS; Bradley, Kenneth P SAM
Subject: SH Expansion - decision on M2M

I've received concurrence in my recommendation from 2 of the 3 agencies. The one I have not heard from is now out of the office for 2 weeks.

I have not heard from either of the 2 Corps folks included on the concurrence/non-concurrence list.

BB

 Sent from my BlackBerry Wireless Device

Willett, Brenda W SAW

From: Ed_Eudaly@fws.gov
Sent: Tuesday, March 27, 2007 8:56 AM
To: Bailey, William G SAM@SAS
Cc: bisterfeld.ted@epa.gov; Hoke, Joseph T SAW@SAS; kay.davy@noaa.gov; Bradley, Kenneth P SAM; mueller.heinz@epamail.epa.gov; Pace Wilber; Garrett, Thomas A SAS; John_Robinette@fws.gov; Jane_Griess@fws.gov; Russell_Webb@fws.gov
Subject: Re: Savannah Harbor Expansion Project: Decision on Model-To-Marsh Revisions

Bill:

I concur with your recommendation to not pursue modification of the model-to marsh link. I have coordinated with Savannah NWR and they also concur. Please consider this e-mail as Service concurrence with your recommendation.

Ed EuDaly
 U.S. Fish and Wildlife Service
 176 Croghan Spur Road, Suite 200
 Charleston, SC 29407
 843-727-4707 ext. 227
 FAX 843-727-4218

"Bailey, William G SAM@SAS"
 <William.G.Bailey@sas02.usace.army.mil>

03/22/2007 12:19 PM

To: <bisterfeld.ted@epa.gov>, <ed_eudaly@fws.gov>, <kay.davy@noaa.gov>, "Garrett, Thomas A SAS" <Thomas.A.Garrett@sas02.usace.army.mil>, "Hoke, Joseph T SAW@SAS" <Joseph.T.Hoke@sas02.usace.army.mil>
 cc: <mueller.heinz@epamail.epa.gov>, "Pace Wilber" <Pace.Wilber@noaa.gov>, "Bradley, Kenneth P SAM" <Kenneth.P.Bradley@sam.usace.army.mil>
 Subject: Savannah Harbor Expansion Project: Decision on Model-To-Marsh Revisions

I have attached a decision document with my recommendation to (1) continue using movement of the 0.5 ppt point from the EFDC model, and (2) not pursue modifying the Model-To-Marsh link that we discussed on 8 March. Not revising the M2M will mean that we will use the Marsh Succession Models to identify wetland impacts from a harbor deepening (checking the predictions of the EFDC Model), but not with the various mitigation scenarios.

<<EXPAN LCA M2M revision decision – Mar 07 V2.doc>>

I have spoken to each of you separately and each expressed preliminary support for this approach.

Please let me know if you concur in the recommended course of action. If you want to sign the attached document, you may. But if you prefer, you can just send me an email letting me know whether you Concur or Non-Concur with the recommendation.

William Bailey [attachment "EXPAN LCA M2M revision decision – Mar 07 V2.doc" deleted by Ed Eudaly/R4/FWS/DOI]

Willett, Brenda W SAW

From: Kay Davy [Kay.Davy@noaa.gov]
Sent: Thursday, March 22, 2007 12:56 PM
To: Bailey, William G SAM@SAS
Subject: Re: Savannah Harbor Expansion Project: Decision on Model-To-Marsh Revisions

Attachments: EXPAN LCA M2M revision decision -- Mar 07 V2. KayD.doc; Kay.Davy.vcf



EXPAN LCA M2M Kay.Davy.vcf (370
 revision decisio... 8)

Hi Bill,
 I've attached our concurrence.
 Thanks,
 Kay

Bailey, William G SAM@SAS wrote:

>
 > I have attached a decision document with my recommendation to (1)
 > continue using movement of the 0.5 ppt point from the EFDC model, and
 > (2) not pursue modifying the Model-To-Marsh link that we discussed on
 > 8 March. Not revising the M2M will mean that we will use the Marsh
 > Succession Models to identify wetland impacts from a harbor deepening
 > (checking the predictions of the EFDC Model), but not with the various
 > mitigation scenarios.
 >
 > <<EXPAN LCA M2M revision decision -- Mar 07 V2.doc>> I have spoken to
 > each of you separately and each expressed preliminary support for this
 > approach.
 >
 > Please let me know if you concur in the recommended course of action.
 > If you want to sign the attached document, you may. But if you
 > prefer, you can just send me an email letting me know whether you
 > Concur or Non-Concur with the recommendation.
 >
 >
 > William Bailey
 >

II. ENVIRONMENTAL RESOURCES

II. Environmental Resources

A. Marsh Succession

1. MFR dated 17 October 2005, Marsh Succession Modeling Teleconference Notes
2. MFR dated 22 March 2007, Proposed Revision to the Model to Marsh Linkage

B. Wetlands

1. MFR dated 7 July 2003, SHEP, Summary of 1 July Interagency Meeting on Wetlands.
2. MFR dated 5 June 2006, SHEP, Summary of 31 May Meeting of the Wetlands Interagency Coordination Team.
3. MFR dated 5 June 2006, Revised 30 June 2006, SHEP, Summary of 31 May Meeting of the Wetlands Interagency Coordination Team.
4. MFR dated 28 December 2006, Revised 9 January 2007, SHEP, Summary of 15 December Meeting of the Wetlands Interagency Coordination Team.
5. MFR dated 26 June 2007, revised 29 June 07 and 3 August 07, SHEP, Interagency Coordination Meeting Record 01'20-21 June Meeting.
6. E-MAIL from William G. Bailey, SAS, dated 5 April 07, SHEP, Wetlands Interagency Coordination Team – Decision on Model-To-Marsh Revision
7. E-MAIL from William G. Bailey, SAS, dated 21 July 09, SHEP, Wetlands Interagency Coordination Team Area 1S
8. E-MAIL from William G. Bailey, SAS, dated 03 June 2011, SHEP, Wetlands Interagency Coordination Team meeting Presentation
9. MFR dated 7 June 2011, SHEP, Wetlands Interagency Coordination Team Meeting Summary

October 17, 2005 Marsh Succession Modeling Teleconference Notes

Attendees:

Paul Conrads - USGS
 Hope Moorer - GPA
 Ed Roehl - ADMLi
 Ruby Daamen - ADMLi
 Bo Ellis - ATM
 Joe Hoke - USACE, Savannah District
 Elizabeth Godsey - USACE, Mobile District
 Bill Bailey - USACE, Savannah District
 Larry Keegan (host) - Lockwood Greene
 Steven Davie - Tetra Tech
 Fran Way - ATM

Agenda:

- (1) Schedule validation of tasks, durations and dates for task family MSM - Marsh Succession Model
- (2) Clarification and agreement on:
 - USGS remaining work in Retraining M2M module and completion dates.
 - Review plans and schedule for M2M module
 - Plan and schedule for finalization of M2M report
 - Needs of USGS from Tetra Tech to complete M2M retraining and testing, particularly regarding the output format from EFDC for input to M2M. Preference is for the output format to be directly importable into M2M without manipulation or modification as it comes from EFDC.
 - Needs of USGS from ATM to complete M2M retraining and testing, particularly regarding the output format from M2M (Output data file must be directly importable into MSM without manipulation or modification as it comes from the M2M)
 - Needs of ATM from USGS to complete MSM and report
 - Delivery date for MSM and report for review
 - Review plans and schedule for MSM
 - Determination of training dates for USACE personnel in use of MSM

Summary of Results

Schedule validation for task family MSM - Marsh Succession Model

This was not discussed pending research of the scope and duration of potential modification to M2M module to match ATM grid requirements.

USGS remaining work in retraining M2M module, completion dates and needs of USGS from Tetra Tech

The retraining work is done. USGS is awaiting an input file from Tetra Tech which is an output from the EFDC model subjected to post processor manipulation. The post processing will put the data into comma delineated format and ensure date formats are correct as needed by M2M module. The work has been done and the simulation was run over the weekend. USGS should get the output file later today or tomorrow. After receipt of the output file from Tetra Tech, USGS needs 10 to 14 days to test and stress the M2M module.

Review plans and schedule for M2M module and finalization of M2M report

Assuming no impact by the work to modify the output grid, the expected delivery date of the M2M module is 10/28/05. A draft report will have to go through internal USGS review before it will be ready for project review. The draft report is slated for delivery for review by 12/2/2005 after internal review in USGS.

October 17, 2005 Marsh Succession Modeling Teleconference Notes

Once the module is finished and delivered, there is a need to have a training session for users of the M2M module. This should be a one day session, probably in Savannah, for users to ask questions, familiarize themselves with the module and run through several example runs.

Needs of USGS from ATM to complete M2M retraining and testing

No needs were identified by USGS from ATM

Needs of ATM from USGS to complete MSM and report

The output from the M2M module cannot be used directly for input into the MSM. The MSM developed by ATM uses grid cells centered at 100' intervals. The M2M module output is in grid cells of 10 X 10 m or 100 X 100 m on a side. There was considerable surprise and discussion of this requirement. Neither ADMLi nor USGS were aware of the difference in grid cell layout. Their proposal to retrain the M2M module specifically included identification of an option to revise the grid size based on their understanding of ATM's needs. Discussion identified three options to resolve this:

- Revise the output of the M2M module to meet the grid cell size and spacing as used in the MSM.
- Develop a "post processor" for the M2M to interpolate the output into the grid layout used by ATM's MSM model
- Revise ATM's MSM model to either conduct an interpolation of the input data from M2M or revise the grid layout used in the MSM to match the output of the M2M module.

Discussion of the options led to agreement that the preferred approach would be to avoid using a post processing approach if possible. ADM will evaluate what is needed to revise the output from the M2M module to match the ATM MSM grid layout. To avoid further confusion, ATM will transmit exactly what they need for input grid as soon as possible, either by resending what they provided earlier or in a new document when John Bossart gets back from into the US later this week.

In addition, ATM expressed that they also needed salinity layers output from the M2M module using historical values. These layers need to be time averaged values of periods that end on a date that they were out monitoring vegetation. They need to be periods of two years, one year, six months and three months duration ending up on particular dates. The periods and dates are known to USGS and have been provided in the past. No confusion existed over the format or requirements for this information.

Review plans and schedule for MSM and finalization of MSM report

Completion of M2M module and delivery is needed to complete the MSM. That means that the grid question must be resolved. After ATM receives the salinity layers they need, it will take approximately one month to finish validation of the MSM and to be ready to conduct training on the MSM usage. It will take an additional two weeks to finish the draft report which will be ready to go into the project review process (ITR).

Determination of training dates for USACE personnel in use of MSM

Not discussed pending results of resolution of MSM input grid layout question.

Summary of schedule finish dates

- Deliver M2M module – 10/28/05
- Deliver M2M module report for USACE review – 12/2/05
- Deliver salinity layers to ATM for validation – 10/28/05
- Complete validation of MSM – 11/30/05
- Complete draft report for MSM – 12/14/05
- M2M user training – to be determined
- MSM user training – to be determined

October 17, 2005 Marsh Succession Modeling
Teleconference Notes

Summary of Action Items

- ATM to document needs of MSM for input grid resolution and layout as soon as possible
- ADMLi to review ATM requirements and evaluate effort to revise the output grid of the M2M module. They will advise of effects on cost, effort and schedule.
- ATM to investigate options for revising MSM model to manipulate M2M module output from 10 X 10 m grid for use by MSM model as an initial step in MSM modeling. They will advise of the impact of this on cost, schedule and performance. This option will require a detailed description of how the manipulation will be done for technical review.
- USGS to begin coordination of internal review cycle for M2M module report
- USACE to finalize plans for M2M and MSM project review

DECISION DOCUMENT

SUBJECT: Savannah Harbor Expansion Project;
Proposed revision to Model-To-Marsh linkage

1. A problem has developed with use of the Marsh Succession Models (MSMs) on some of the mitigation scenarios. The scenarios affected are those that substantially modify flows between the Front, Middle, and Back Rivers. The problem results in an overstatement of salinity in the Middle and Back Rivers, rendering the MSMs unreliable to evaluate wetland impacts on those scenarios. We've identified the Model-To-Marsh linkage (M2M) as the source of the problem.

2. The following two courses of action are available.

In Option 1, we would use the EFDC salinity model to identify wetlands that shift from fresh to brackish species. We would do this by examining what marshes change from <0.5 ppt to > 0.5 ppt salinity. We would apply that technique to both the "impact" and "mitigation" runs. We would use the MSM to provide more detail on the vegetation changes on the "impact" runs, thereby checking the EFDC results and increasing our confidence in the EFDC results. We would not use the MSM for "mitigation" runs. This Option describes our present condition and plan for proceeding with the wetland evaluations.

In Option 2, we would use the EFDC salinity model to identify wetlands that shift from fresh to brackish species. We would apply that technique to both the "impact" and "mitigation" runs. We would revise the M2M as described in the enclosed proposal and apply the MSM to both "impact" and "mitigation" runs.

3. The Lead and Cooperating Agencies discussed this issue on 8 March 2007. The MFR, which summarizes the discussions of the meeting, are attached.

4. The USGS would lead the work to revise the M2M. They estimate it would take \$110,750 and 12 months to produce a final product (including internal review). The work would include participation of an interagency team to identify flow paths from the rivers to specific locations in the marsh.

5. The following summarizes the pros and cons of proceeding with the proposed revisions (Option 2):

PROS

- The revisions would allow the Marsh Succession Models to be applied to all mitigation scenarios presently being considered. At this time, the MSMs do not give reliable results when applied to mitigation scenarios that substantially alter flows between the three rivers (Front, Middle and Back Rivers).
- The revisions would include the use of an interagency team, increasing the likelihood of those agencies approving the final product.

CONS

- The EFDC model in conjunction with spatial data can acceptably be used to identify movement of the 0.5 ppt contour, allowing predictions of change between freshwater and brackish marsh. Use of the MSM on the impact runs will provide a comparison of the EFDC and MSM impact predictions (without mitigation).
- Revision of the M2M would cost roughly \$110,000 and possibly delay decisions on the project by a year. The 1998 Feasibility Report estimated project net benefits (benefits – costs) to be about \$35,000,000 per year.
- The effectiveness of the proposed revisions and the reliability of the MSM results will not be known until after the work is performed. The proposal acknowledges substantial uncertainty regarding accuracy of salinity predictions even with the proposed revisions.
- The revised M2M may have to be further modified if additional mitigation scenarios are developed. The further modifications would require additional costs and possibly further delay decisions on the project.

6. Conclusions.

The project has one accepted method of identifying potential impacts to wetlands (using EFDC to identify movement of the 0.5 ppt contour).

The accuracy of that model can be judged by use of the Marsh Succession Models for impacts from deepening scenarios without mitigation.

Therefore, the revised M2M – and the Marsh Succession Models – are not required to identify wetland impacts from the various harbor deepening alternatives (with mitigation).

Implementation of the proposed M2M revisions would cost roughly \$110,000 and possibly delay decisions on the project by a year.

The additional information that may be obtained by revising the M2M does not appear to be sufficient to justify the cost of the modifications or delay to the project.

7. Recommendation.

Based on the information provided in this document and its enclosures, I believe that implementation of the proposed Model-To-Marsh revision is not warranted and recommend that the modifications not be pursued.



William Bailey
Physical Scientist
Mobile/Savannah Regional Planning Center

8. Concurrence:

	<u>CONCUR</u>	<u>NON-CONCUR</u>	<u>INITIALS</u>
Joseph Hoke Hydraulic Engineer USACE Wilmington/Savannah Engineering	_____	_____	_____
T. Alan Garrett Project Manager USACE Savannah District	_____	_____	_____
Ed EuDaly Senior Biologist USFWS Charleston	_____	_____	_____
Ted Bisterfeld Ecologist EPA Region 4	_____	_____	_____
Kay Davy Fishery Biologist NOAA Fisheries Charleston	_____	_____	_____

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Lead & Cooperating Agency meeting, 08 March 07

1. The meeting was called to learn more about a proposal (attached) to revise the Model-To-Marsh (M2M) component of the Marsh Succession Models. Alan Garrett, Corps Project Manager, chaired the meeting. A list of attendees is attached.
2. Bill Bailey provided an overview of the problem.

The Corps has successfully run the Marsh Succession Models to identify changes in wetlands from the various channel deepening scenarios. These are the "impact" runs. As we applied the models to the mitigation scenarios, we observed unexpected results. For some mitigation scenarios, the EFDC runs predict a decrease in salinity but the MSMs show shifts to more saline wetland species. Upon further inspection, we observed that on those runs the M2M component was providing higher root zone salinity values than were occurring in nearby rivers. The M2M extrapolates riverine salinity values from seven sites to root zone salinity values across the entire marsh surface. Apparently the limited number of points from which the M2M is starting its extrapolation leads to inaccuracies in mitigation scenarios that substantially alter flows between the three rivers (Front, Middle and Back Rivers). The M2M takes higher salinity levels on the Front River and uses them as a basis for incorrectly predicting higher salinity levels in portions of Middle and/or Back Rivers.

3. We described two avenues through which the project could move forward.

In Option 1, we would use the EFDC salinity model to identify wetlands that shift from fresh to brackish species. We would do this by examining what marshes change from <0.5 ppt to > 0.5 ppt salinity. We would apply that technique to both the "impact" and "mitigation" runs. We would use the MSM to provide more detail on the vegetation changes on the "impact" runs, thereby checking the EFDC results and increasing our confidence in the EFDC results. We would not use the MSM for "mitigation" runs.

In Option 2, we would use the EFDC salinity model to identify wetlands that shift from fresh to brackish species. We would apply that technique to both the "impact" and "mitigation" runs. We would revise the M2M as proposed and apply the MSM on both "impact" and "mitigation" runs.

4. Paul Conrads and Ed Roehl provided an overview of the proposed SOW to revise the M2M. This write-up is only a small part of the description Paul and Ed provided.

The present M2M starts with river flows and tidal conditions. It adds to that foundation riverine salinity values from the EFDC model. The present M2M could be considered more a far-field approach since it uses a limited number of riverine salinity values and extrapolates them across the entire marsh surface. It determines a relationship between river salinity and the well gages through time-delayed input signals and moving window averages between river salinity and pore-water salinity. The M2M was designed to primarily identify changes in root zone salinity that occur longitudinally in the estuary (along the length of the river).

The proposed revisions would allow the M2M to better identify lateral changes in root zone salinity that occur across the estuary (between different rivers or away from a single river). These revisions would start with a more detailed network of river salinity stations. It would then extrapolate those values to nearby areas of marsh. This could be considered more of a near-field approach. Additional marsh well data would be obtained to establish strong relationships between river and marsh root zone salinities. The Q-zone approach would be used as a starting point for the river to marsh flow paths. An interagency panel would be used to identify those pathways and guide the model revisions.

Uncertainty in the results of this M2M revision include three components: (1) Quality of the original data, (2) Quality of the data used to forecast or hindcast to fill in missing data, and (3) Quality of the data from EFDC. These are the same sources of uncertainty with use of the present M2M. This revision will require development of additional synthetic data to fill in records for the extra river sites that will be used.

5. The group then asked questions of Paul and Ed Roehl about the proposed work.

What will be the reliability of the results when using more synthetic data? Would the public accept the use of more synthetic data? RESPONSE: The reliability will not be known until the model is produced. However, data for the existing M2M show it is highly reliable for use with the present configuration of the estuarine rivers. As with any model, the ultimate accuracy of the revised model's predictions would not be known until after post-construction monitoring is performed.

What will be the reliability of the results when using data from the GPA stations? Those data were determined to be unacceptable in development of the existing M2M. RESPONSE: Data from the GPA stations were not used in the existing M2M primarily because of their short period of record. A much longer – and therefore more reliable – record exists for the USGS gages. The GPA stations would be used in the model revisions to provide a finer grid of river locations from which to extrapolate salinity levels across the marsh surface. The finer grid should increase the accuracy and reliability of the model predictions within specific marsh areas. The additional stations

would also allow a more detailed quantification of the sensitivity of marsh areas to local riverine conditions. The GPA stations also provide data obtained during 1997 – the flow conditions that are being modeled during the mitigation analyses. The reliability of the revised models would not be known until they are developed.

What are the differences between the GPA stations, marsh gages, and USGS gages?

RESPONSE: The differences include both duration and density. The marsh gages provide salinity information in the marsh root zone at 7 sites from 1999 to 2005 and 10 GPA sites from 1999 to 2002. The GPA stations have 14 riverine stations with data from portions of 1997 and 1999. The USGS gages provide salinity information at 4 riverine sites for many years.

What will be the reliability of the final predictions if the development of the revised model includes extensive synthetic data? RESPONSE: Models are regularly developed and applied when only limited actual data exists. Synthetic data is an accepted technique in the modeling community when insufficient historical data exists.

If new algorithms need to be developed for each mitigation plan, it could appear that we have developed a model just to show the results we want on the plan we want. If the same model is not used to evaluate all plans, how can we ensure we are evaluating all plans to the same degree of accuracy? RESPONSE: The same procedures would be followed to evaluate all plans, even if the models differ.

The existing M2M and its algorithms appear to work well with the present river configuration. If new algorithms only are effective for the mitigation plans that substantially modify river flows, how can we ensure their accuracy? RESPONSE: The change from a “far-field” approach to a “near-field” approach increases the likelihood that the revisions would be accurate when flows are substantially modified. The reliability of the results will not be known until the models are developed.

The MSM provides more detailed information on expected wetland changes than does the EFDC model. Do we really need those more detailed predictions for each mitigation scenario? RESPONSE: If reviewers want the detailed information, the revised M2M is the only way to obtain it.

Although a provisional version may be available in 5 months, the project will need a fully accepted version before it could release a report containing results using this approach. The final report is scheduled to be available in 12 months. If complications occur that delay the work, the date would extend further. A 12-month delay in the project would be a major impact to GPA. RESPONSE: Reaching a timely decision on this project is a goal of all the Cooperating Agencies.

The proposed revisions would likely extend the duration of the project. That extension may decrease the reliability of other analyses, requiring they be updated. That would require additional time and money. RESPONSE: Reaching a timely decision on this project is a goal of all the Cooperating Agencies.

Some of the mitigation scenarios appear to decrease the tidal range. The USFWS may not be able to support those plans as a substantial decrease in the depth of flooding over the marsh may adversely affect nekton use of those areas. The plans which have the most effect on tidal range are the ones that substantially alter flows between the three rivers.

RESPONSE: The proposed M2M revisions would not be beneficial if the final mitigation plans do not include measures that substantially alter flows between the three rivers.

Have the status and trends of wetlands since the last harbor deepening been taken into account? RESPONSE: Both the M2M and the MSM are based on data obtained since the last deepening.

Would the proposed revisions be necessary for the post-construction monitoring and adaptive management? RESPONSE: The EFDC will be used to ensure that changes in riverine salinity that are predicted are not exceeded. The existing M2M and MSM could be used to provide a perspective on what should have been expected in the wetlands with the observed flows if no further deepening occurs.

William Bailey
Physical Scientist

SAVANNAH HARBOR EXPANSION PROJECT

LEAD & COOPERATING AGENCY MEETING

08 MAR 2007

ATTENDEES

Ed EuDaly	USFWS – Charleston	(by phone)
Ted Bisterfeld	EPA Region 4	(by phone)
Kay Davy	NOAA Fisheries - Charleston	(by phone)
Alan Garrett	USACE - Savannah	
Joe Hoke	USACE – Wilmington/Savannah	
Hugh Heine	USACE – Wilmington	(by phone)
Elizabeth Godsey	USACE – Mobile	(by phone)
William Bailey	USACE – Mobile/Savannah	
Hope Moorner	GPA	(by phone)
Larry Keegan	Lockwood-Greene Engineers / GPA	(by phone)
Morgan Rees	Rees Engineering / GPA	(by phone)
Paul Conrads	USGS – Columbia	(by phone)
Ed Roehl	Advanced Data Mining	(by phone)

Estimation of Pore-water Marsh Salinities for Harbor Reconfiguration Scenarios

By

Paul Conrads, U.S. Geological Survey – Water Resources Division
Edwin Roehl, Advanced Data Mining, LLC
Wiley Kitchens, U.S. Geological Survey – Biological Resources Division
Zachariah Welch, Florida Coop Unit, University of Florida,

INTRODUCTION

Under sponsorship from the U.S. Army Corps of Engineers (USCOE) and the Georgia Ports Authority (GPA), the Lower Savannah River Estuary and the surrounding freshwater tidal marshes of the Savannah National Wildlife Refuge (SNWR) have been studied for years by a variety of governmental agencies, water users, universities, and consultants. Their interests are in maintaining water quality and predicting the potential impacts of a proposed harbor deepening on the estuary and tidal wetlands. Two major initiatives were the development of a three-dimensional hydrodynamic model (3DM) by a team of hydrologists, and the development of a marsh succession model (MSM) by a team of plant ecologists. The 3DM predicts changes in riverine water levels and salinity in the system in response to potential harbor changes. The MSM predicts plant distribution in the tidal marshes in response to changes in the water-level and salinity conditions in the marsh. A mechanism for linking riverine and marsh behaviors was needed.

To support 3DM and MSM development, many disparate databases were created that described the natural system's complexity and behaviors, but these databases had not been compiled into a usable form. Variables having particular relevance include those describing bathymetry, meteorology, streamflow (Q), water level (WL), specific conductance (SC), water temperature (WT), and dissolved oxygen concentration (DO). Most of the databases were composed of time series that varied by variable type, periods of record, measurement frequency, location, and reliability. Scientists recognized that data-mining techniques, which include artificial neural networks (ANN), could be used to link riverine and marsh behaviors.

To link the riverine predictions of the 3DM to the MSM, a "model to marsh" (M2M) model was developed by the U.S. Geological Survey and Advanced Data Mining (ADM) using data mining techniques that included ANN models. The ANNs simulated riverine and marsh water levels and salinity in the vicinity of the SNWR for the full range of 11½ years of data from riverine and marsh gaging networks. With M2M, the 3DM and MSM comprise an integrated decision support system for use by various regulatory and scientific stakeholders. The development and application of the M2M is described in Conrads and others (2006).

The M2M has been successfully applied to evaluate the effects of deepening the harbor by generating the inputs to the MSM from the outputs of the 3DM. The M2M also has been used to evaluate potential mitigation scenarios for minimizing the impacts from

harbor deepening. These mitigation scenarios included minor and major changes in channel configuration and flow distribution in the system.

PROBLEM STATEMENT

Eight mitigation scenarios that involve major structural changes in the vicinity of the SNWR, such as the installation of flow diversion structures and the cutting and filling of channels, have been proposed for evaluation. The M2M was not designed to accommodate mitigation scenarios that involve major structural changes. Currently (2007) there is not a mechanism for reliably estimating pore-water salinities in the marsh from riverine inputs for these major mitigation scenarios.

The responses of the SNWR to major changes are very likely to be different from any behaviors ever manifest in the historical record. While the 3DM can be configured to estimate riverine WL and SC with the major changes, it is limited to riverine estimates and cannot be credibly configured to estimate pore-water salinities in the marsh. Using data mining techniques, Conrads and others (2006) found that pore-water salinities integrate riverine WL and salinity variability over several months and often there are long time delays between riverine salinity conditions and marsh pore-water salinity response. A new tool similar to the M2M, hereafter referred to as M2M.2, needs to be developed to estimate pore-water salinity concentrations to evaluate mitigation scenarios involving major structural changes. To provide the necessary technical input and agency review, it is proposed that a multi-agency and multi-disciplinary technical working group be formed of the USGS-S C. Water Science Center (USGS-SCWSC), the USGS-Florida Coop Unit (USGS-FCU), U.S. Fish and Wildlife Service (USFWS), U.S. Army Corps of Engineers (USACE), and Advanced Data Mining (ADM).

OBJECTIVES

There are three objectives for this project.

1. *Develop new marsh salinity estimation models* - for estimating pore-water salinities at marsh gaging sites for various mitigation model scenarios, using either measured or predicted river water level and specific conductance data at gage locations. It is possible that algorithms would have to be developed for each mitigation scenario.
2. *Develop new salinity spatial interpolation scheme(s)* - that estimate salinities throughout the SNWR from the USGS marsh gaging sites. The current scheme is embedded in the M2M's two-dimensional visualization and gridding application (2DVG). The new schemes must reflect greater lateral variation in the pore-water salinity than the current scheme. It is possible that new schemes would be created for each mitigation scenario.
3. *Develop M2M.2 2DVG and Simulator Applications* - to deploy the work products from Objectives 1 and 2. This includes adapting the 2DVG and the M2M Simulator, which estimates salinities at the USGS marsh gages.

SCOPE

The scope of this study is to address the relation between the riverine salinity and the pore-water marsh salinity for harbor deepening mitigation scenarios. The study's major tasks are described below.

- Task 1** *Develop Pore-water Estimation Matrix* – that defines the usable permutations of input USGS or GPA river gages to estimate salinities at each marsh gaging station for each mitigation scenario. Consideration will be given to the proximities of gages and flow diversion structures, and the overall quality of input gage measured, forecasted, and hindcasted data used for developing or generated by the M2M.
- Task 2** *Develop predictive models* - for each permutation defined in Task 1. This involves determining optimal time delays and moving window averages between river salinity and pore-water responses through correlation analysis. ANNs provide the best possible correlations in terms of the process information they provide and their prediction accuracy. The number of models to be developed depends on the permutations defined in Task 1.
- Task 3** *Define area of influence and spatial gradient of the USGS marsh gages* - for the new salinity spatial interpolation scheme.
- Task 4** *Develop M2M.2 2DVG application* - to reflect findings from Task 3. It is likely that multiple visualizations and grids will need to be developed to accommodate all of the mitigation scenarios.
- Task 5** *Develop M2M.2 Simulator* – like M2M, it will integrate the 3DM with the MSM using the models from Task 2 and the M2M.2 2DVG application from Task 4, but tailored for the mitigation scenarios involving major structural changes.
- Task 6** *Document the approach and results.*

RELEVANCE AND BENEFITS

An important part of the USGS mission is to provide scientific information for the effective water-resources management of the Nation. To assess the quantity and quality of the Nation's surface-water, the USGS collects hydrologic and water-quality data from rivers, lakes, and estuaries using standardized methods, and maintains the data from these stations in a national database. Often these databases are under utilized and under interpreted for addressing contemporary hydrologic issues. The techniques used to develop the M2M and models of the Cooper River (Conrads and Roehl, 1999), the Beaufort River (Conrads and others, 2003), and the Pee Dee River (Conrads and Roehl, 2006) demonstrate how valuable information can be extracted from existing databases to assist local, state and Federal agencies.

The project benefits the Georgia Ports Authority and the Army Corps of Engineers by providing data analysis needed by water-resource managers to make decisions concerning mitigation of the Savannah River Estuary to accommodate potential deepening of Savannah Harbor. The project builds on previous studies relating river salinity to marsh pore-water response. This is consistent with primary USGS activities that include providing knowledge and expertise to assist various levels of government in understanding and solving critical water-resources problems.

TECHNICAL APPROACH

The historical data do not contain information explicitly about the impacts of the proposed mitigation scenarios involving major structural changes. For these circumstances, the best available data, tools, and human expert knowledge and experience must be brought to the problem. The development and use of the M2M.2, and related findings will provide the best possible resources for evaluating the major mitigation scenarios.

Available Data and Utilities from M2M Study

The M2M is based on river and marsh WL and SC ANN models for the USGS and GPA gaging stations in the river and marshes. These are empirical models and for a system as complex as the Savannah River estuary, it was critical that measured, not estimated, data were used that cover the greatest range of hydrologic and tidal responses. For making predictions of pore-water salinity, the most valuable data for M2M development were from the long-term USGS river and marsh gaging stations, which covered over 11 years and 5 years respectively, and comprise a range of flow conditions from drought to floods. Of lesser value were the GPA river and marsh data, which were limited to short measurement periods and a small range of hydrologic conditions. The USGS river data are the major inputs for the final pore-water salinity models and a few of the GPA stations are used to reduce the error in the pore-water models.

The M2M Simulator and 2DVG applications will be valuable for estimating pore-water salinity for the major mitigation scenarios. The Simulator integrates a collection of individual models of the GPA and USGS river gages with the various field databases, such that all of the WL and SC data from the river gages were individually modeled. By hindcasting and forecasting the short-term data collection periods at the GPA sites, a complete database was generated for the 11½ year period from 1994 to 2005. This feature was incorporated to allow scientists and managers to simulate any period from the last deepening and analyze system responses at any gage location. The 2DVG provides spatial interpolation-extrapolation and visualization of the marsh responses across the marsh wells. It is easily modified to accommodate new pore-water estimates at the USGS marsh sites and new interpolation-extrapolation schemes across the marsh.

Pore-water Estimates for Mitigation Scenarios

The MSM models use the growing-season average pore-water salinity as input. The measured, forecasted, and hindcasted SC records at the GPA river sites can be used in conjunction with the USGS sites to determine the best estimates of the average pore-water salinity during the growing season. Estimates will be based on the assumption that a marsh gage responds to nearby river gage(s) and that the candidate river gage(s) may vary by mitigation scenario. Often good correlations between two time series, such as river and marsh SC, can be obtained by adjusting the time delay and moving window average of the explanatory variable (river SC) to achieve the highest correlation with the response variable (marsh SC). For highly dynamic SNWR, trend information proved invaluable for estimating inertia-driven behaviors. Representing trends requires at least two input variables whose values represent two different times or two different locations at the same time, or both.

To estimate pore-water responses to mitigation scenarios, river sites will be selected as candidate explanatory variables for each mitigation plan. For example, the schematic for Mitigation Plan 5 is shown in figure 1. In this scenario, it is believed that salinity intrusion occurs further up the Front River and that freshwater flows increase down the Little Back River. The riverine gages closest to the Middle River 1 (M1) for estimating its pore-water salinity are GPA12 and GPA12r. For Back River 2 (B2), gages 8979, 89784, and GPA15 appear to be good candidates. Final river site selection will be based on the quality of the measured, hindcasted, and forecasted GPA data.

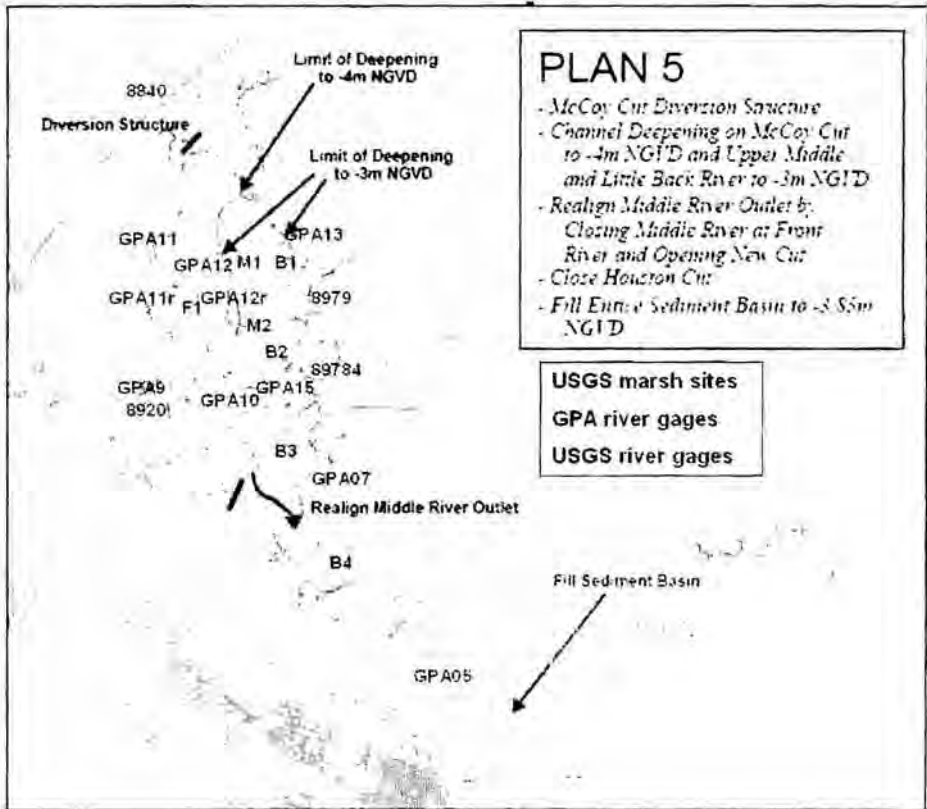


Figure 1. Locations of river and marsh gages and schematic of Plan 5 mitigation scenario

The Pore-water Estimation Matrix will be developed of mitigation plans, marsh gages, and candidate river sites. It is anticipated that some of the plans will share configurations of river gages to marsh gages. Pore-water estimates will be determined for each plan and the estimates will be compared with the predictions made with the original ANN models of the M2M.

Pore-Water Salinity Projections Across the Marsh

The time-series data of the individual marsh gages depict the longitudinal gradient of the system to various hydrologic and tidal conditions. The time-series data do not support the lateral gradients in the system. The M2M's 2DVG is based on estimates of the longitudinal variations from model predictions at the marsh sites. A simple interpolation scheme is used to estimate the lateral gradients.

For the mitigation scenarios, marsh wells will be assigned to the vegetative zones (Q-zones) depicted in Figure 2 and added to the Pore-water Estimation Matrix. Lateral variation across the marsh will be based on field experience and limited data taken during transect studies by the Florida Coop Unit (FCU) at the University of Florida.



Figure 2. Locations of Q-zones in the tidal marsh in the vicinity of the Savannah National Wildlife Refuge

Integration of Hydrodynamic Model and Marsh Succession Models – M2M.2

Like M2M, M2M.2 will integrate output from the 3DM and generate the marsh salinity grid for input to the MSM. Linking the 3DM is accomplished by reading in a file of simulated differences in SC values for the river for the mitigation plan scenarios. The use of differences, or deltas, from the 3DM increases the prediction accuracy of the model. Mechanistic model, such as the 3DM, typically are better suited from predicting relative differences between two conditions rather than making absolute predictions for one

scenario. The differences (deltas) from the 3DM are added to the historical time series for the scenario and then used in the M2M.2. The application estimates pore-water salinity at the marsh gages and the salinity grid is generated for input to the MSM applications.

Figure 3 describes the data and workflow from the 3DM, through the M2M.2 Simulator and 2DVG applications, and to the MSM. Here, the eight mitigation scenarios are handled separately, providing each with completely customized solution bearing the best ideas of the multi-disciplinary team. At left the 3DM is run for each scenario and separate output files are generated. Next at top center, in the M2M.2 Simulator the user selects the scenario to be run, the appropriate 3DM output file is loaded, the appropriate prediction models are engaged, a simulation is run, and an output file of marsh specific conductivities is generated. Next at right, in the M2M.2 2DVG the user selects the scenario to be run, the M2M.2 Simulator output file is loaded, and an output file of spatially interpolated marsh salinities is generated, which can be loaded into the MSM.

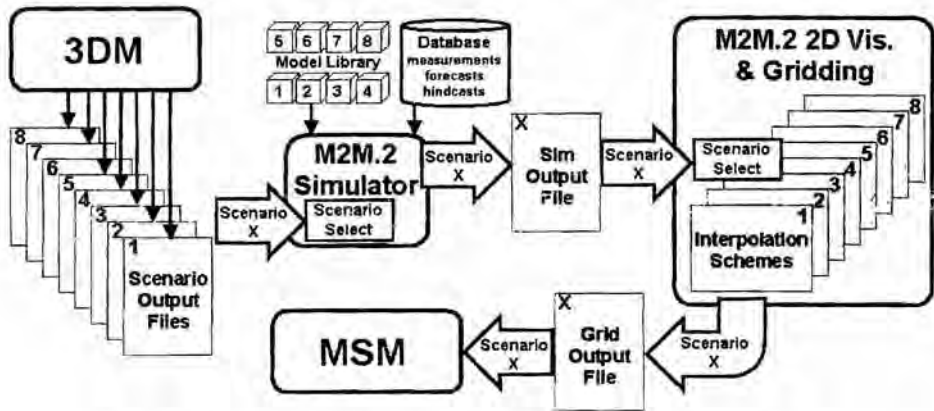


Figure 3. Schematic of data and workflow through the M2M.2.

UNCERTAINTY OF OUTCOME

In this technical approach, each scenario will have a custom solution developed by a multi-disciplinary technical team composed of the USGS-SCWSC, the USGS-FCU, the USFWS, USACOE, and ADMi personnel that are most knowledgeable in the issues, history, and science of the harbor deepening. As with the M2M, the behaviors and predictive performance of the new “local” models of the M2M.2 will be fully described to the technical team. The performance of the models is expected to be comparable to those of the M2M, with the major sources of uncertainty to be associated with the quality of the data collected from the GPA sites, the quality of the SC hindcasts and forecasts at the GPA sites, and the accuracy of the 3DM predictions.

Generally, the 3DM prediction accuracy of flow and salinity throughout the model domain are better on the Front River and lower portion of the system. The prediction

accuracy is not as good in the vicinity of the SNWF and farther inland in the system. This can be seen in the summary statistic of the model performance for the 50 percentile and the coefficient of determination for the 1999 calibration data and the 1997 validation data set (Tetra Tech, 2006). The accuracy of estimates made by the 3DM for scenarios involving major structural changes is unknowable *a priori*, but very likely to be less accurate than the calibration and validation prediction. The use of differences from the 3DM will reduce absolute prediction error by the model. The 3DM's performance will be the primary source of uncertainty, but significant reliance on its estimates inside the SNWR is unavoidable.

The technical team will leverage the tools in hand to formulate a process of mitigating deepening-related problems. The process may employ a succession of structural changes of varying impact severity. It is likely that each change will have surprising results that can only be determined *post priori* by continued field monitoring and data analysis. This suggests a conservative, iterative mitigation approach composed of these steps - hypothesize, change, test, review, and most importantly, learn will be required.

PROJECT COORDINATION

In making estimates of system responses to the structural changes in the SNWR, it is essential that the appropriate technical resources from the agencies be involved. It is proposed that periodic meetings of the technical working group (USCOE, USF&W, USGS-SCWSC, USGS-FCU, and ADMI) be scheduled to review interim products such as the pore-water estimation matrix, pore-water estimation models, and prototypes of the M2M.2 2DVG and M2M.2. Many of these meetings could be accomplished by teleconferencing.

REPORTING

The project will be documented in a USGS Open-File Report, tentatively titled "Estimation of Tidal Marsh Pore-water Salinity in the Vicinity of Savannah National Wildlife Refuge for Savannah Harbor Deepening Mitigation, Coastal South Carolina and Georgia." A provisional copy of the report will be available for colleague/cooperator review 3 months after the completion of the project. The review process will require an additional 5 months. A limited number of paper copies of the report will be provided to the cooperating agencies; however, the primary outlet for the publication will be the Internet. A link to the report will be posted on the USGS South Carolina Water Science Center web sites.

BUDGET AND SCHEDULE


The Project will be collaboration between the USGS-SCWSC, the USGS-FCU, and ADMI. The project will take approximately 4-5 months to complete the technical analysis and develop the provisional M2M.2 from the start date. The final documentation of the project will be complete approximately 10-12 months from the start date. The total cost of the project will be \$110,750. An itemized description of the tasks and required hours

are listed in Table 1 and a timeline for completion of the project from initiation is presented in Table 2.

Table 1. Tasks, description, notes, hours, and costs.

Task #	Description	Notes	USGS-SCWSC Hours	USGS-SCWSC Cost	USGS-FCU Hours	USGS-FCU Cost	ADMI Hours	ADMI Cost
1	Develop Fore-water Estimation Matrix	tooling up, evaluate data quality, matrix development, meeting with Agencies to finalize matrix	40	\$4,400			40	\$5,000
2	Develop predictive models	upper limit = 8 scenarios x 7 models per = 56 models, x 8hrs/model, use 50% - USGS-SCWSC to review mostly USGS-FCU with assistance from USGS-SCWSC, ADMI to assimilate, meeting for concurrence with Agencies prior to finalization	25	\$2,750			224	\$28,000
3	Define area of influence and spatial gradient of the USGS marsh gages	assume 8 interp schemes to program/integrate at 2days per - USGS-SCWSC to review	40	\$4,400	64	\$6,400	12	\$1,500
4	Develop M2M.2 2DVG application	assume 4 weeks for mostly new but derivative app programming and testing - USGS-SCWSC to rev	25	\$2,750			128	\$16,000
5	Develop M2M.2 Simulator	mostly USGS-SCWSC and USGS-Publications Unit, ADMI and USGS-FCU to assist	25	\$2,750			160	\$20,000
6	Document the approach and results		120	\$13,200	16	\$1,600	16	\$2,000
Totals			275	\$30,250	80	\$8,000	580	\$72,500

Table 2. Timeline for completion of project.

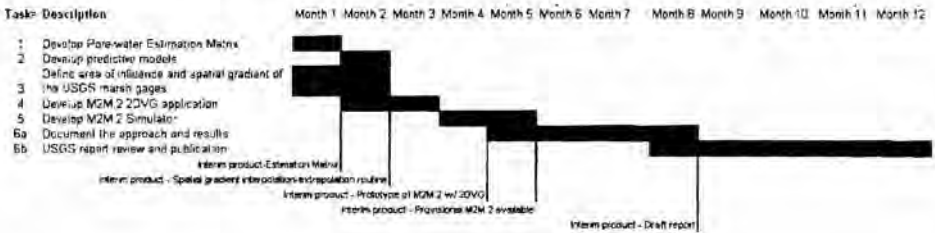

REFERENCES

- Conrads, P.A. and E.A. Roehl, 1999, Comparing physics-based and neural network models for predicting salinity, water temperature, and dissolved oxygen concentration in a complex tidally affected river basin, South Carolina Environmental Conference, Myrtle Beach, March 1999.
- Conrads, P.A., Roehl, E.A., and W.P. Martello, 2003, Development of an empirical model of a complex, tidally affected river using artificial neural networks, Water Environment Federation TMDL Specialty Conference, Chicago, Illinois, November 2003.
- Conrads, P.A., Roehl, E.A., Daamen, R.C., and W.M. Kitchens, 2006, Simulation of water levels and salinity in the rivers and tidal marshes in the vicinity of the Savannah National Wildlife Refuge, Coastal South Carolina and Georgia, U.S. Geological Survey Scientific Investigations Report 2006-5187.
- Conrads, P.A. and Roehl, E.A., 2006, An artificial neural network-based decision support system to evaluate hydropower releases on salinity intrusion, *Hydroinformatics 2006*, edited by Philippe Gourbesville, Jean Cunge, Vincent Guinot, Shie-Yui Liong, Vol. 4, p.2765-2772
- Tetra Tech, 2006, Development of the hydrodynamic and water quality models for the Savannah Harbor Expansion Project. Prepared for the U.S. Army Corps of Engineers – Savannah District, Tetra Tech, Inc. Atlanta, Georgia.

CESAS-PD-E

7 July 2003

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 1 July Interagency Meeting on Evaluation of Wetlands

1. Attendees:

USFWS:	Ed Eudaly John Robinette
SCDNR:	Priscilla Wendt
SCDHEC-OCRM	Rob Mikell
GADNR-CRD:	Kelie Moore Debra Barreiro
GADNR-EPD	Keith Parsons
COE:	Doug Plachy Bill Bailey Steve Calver
GPA	Larry Keegan
ATM/GPA:	John Bossart Bo Ellis

By phone:
EPA Bob Lord

2. The Agenda is attached.
3. The following is a summary of the discussion and does not include all the information that was presented or all comments made during the meeting.
4. The majority of the meeting was a presentation by John Bossart (ATM). He divided his talk into 2 sections: **Data Collection** and **Modeling**. He said the ultimate goal of these 2 efforts was to be able to predict plant changes expected to result from changes in salinity in the rivers.

John summarized the GPA-funded data collection studies that ATM had conducted in wetlands on the Savannah National Wildlife Refuge from 1997 through 2002. Their monitoring could be broken into 2 general types. The first consisted of monitoring salinity and water surface levels in the tidal creeks and on the wetlands. The second consisted of periodic monitoring of vegetation that occurred along established marsh transects. These monitoring efforts are described in detail in reports that were distributed at the meeting.

We also mentioned that the USFWS had conducted other studies on the Refuge wetlands from 2001 through 2002. Those GPA-funded studies were aimed at identifying the resource value of the tidal wetlands that could be impacted by the Expansion Project. The studies were titled "Tidal Wetland Resource Utilization Studies". John Robinette distributed a copy of the report that documents those activities.

Concerning modeling, John said that Wiley Kitchens (USGS/DOI) had used a community-based approach. Although Wiley had identified 126 vegetative species in the field, he used a cluster analysis to group the species based on importance value. The result of this analysis was identification of 10 functional groups that characterize the observed vegetation and span the range of salinity in the upper estuary. The Structural Equation Methodology (SEM) developed by Wiley forms the core of the GIS model that ATM is developing. John stated that the GIS model was capable of displaying additional information, if required by the agencies. This would include such information as species richness, the locations where an individual species would occur throughout the estuary, and the probability of an individual species occurring at a specific site.

5. In response to questions, John said he believed the model would function best at salinities from 0 to 10 ppt, and that was a function of the SEM decision tree. John stated he thought the drought had an order of magnitude of change greater than is expected from a deepening project. The vegetation monitoring revealed that smaller vegetation changes were observed as one moved closer to the ocean. The group also questioned the possible effect of a time lag between the observed salinity and a change in the vegetation at the site. I stated that I had asked Wiley to evaluate that possibility as he refined his SEM Model.

6. Ed Eudaly (USFWS) stated he believes that vegetative communities in fresher water are more valuable to the Savannah River estuarine ecosystem. He defined that as areas having salinities of 0 to 1.0 ppt. He stated that such areas provide the greatest diversity in plant species. The Service will evaluate potential impacts to the Refuge and Refuge operations from proposed project alternatives. The Service favors a community-based approach to assessing impacts to these tidal wetlands.

7. Keith Parsons (GADNR-EPD) raised the issue of the possible need for a sensitivity analysis of alternate river flows on the estuarine vegetation. This would provide information that would be useful if the Corps proposes changes in river flows in the Savannah River Basin Comprehensive Study.

8. I concluded by requesting the agencies review the reports (ATM and USFWS) that were provided at the meeting. One of the first questions to decide is whether an agency believes that any specific additional field investigation is needed. I will contact the agency representatives again early in August. Other decisions are (A) What conditions to use in the impact analysis modeling runs (time of year, river flows, etc.); (B) What type of data the agencies desire in the output of the models; and (C) How much change reflects an impact.

William Bailey
Environmental Resources Branch

SAVANNAH HARBOR EXPANSION PROJECT

INTERAGENCY COORDINATION ON WETLANDS

JULY 1, 2003

AGENDA

COMPLETED WETLAND MONITORING ACTIVITIES ————— ATM

IMPACT IDENTIFICATION METHODOLOGY ————— ATM

DISCUSSION ————— ALL

- Adequacy of existing datasets
- Adequacy of impact identification procedure

BRIEF DISCUSSION OF WETLAND ISSUES AHEAD ————— COE

- Without Project Condition
 - Average or "Critical" Conditions
 - River Flows
 - Effect of Drought
- Pre-Construction Monitoring (Establish Baseline)
- Post-Construction Monitoring

WRAP-UP ————— COE

CESAM-PD-E

5 June 2006

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 31 May meeting of the Wetlands Interagency Coordination Team

- I. Attendees:
- | | |
|-------------|---|
| USFWS: | Ed Eudaly
John Robinette
Jane Griess |
| EPA: | Gerald Miller
Ntale Kajumba |
| NMFS: | Prescott Brownell |
| SC DNR: | Priscilla Wendt – by phone |
| SC DHEC: | Amy Cappellino |
| GA DNR-EPD: | Keith Parsons |
| COE: | Bill Bailey
Hugh Heine
Joe Hoke
Gary Mauldin |
| Observers: | |
| GPA: | Hope Moorer
Larry Keegan (CH2MHill) |

2. The meeting was held at the USFWS Refuge Office outside of Savannah from roughly 1000 to 1600. The meeting was an information meeting only, not a decision meeting. The Corps was not requesting concurrence from the agencies on the level of impacts predicted for the project alternatives.

3. The following is a summary of the discussion and does not include all the information that was presented or all comments made during the meeting.

4. The Corps started by reviewing the process the Team had followed to arrive at this point:

- Harbor deepening is expected to result in changes to salinity levels in the rivers. This salinity will move up the tidal creeks, across the surface of the marshes, to the root zone of the wetland vegetation. The changes in root zone salinity may result in changes in wetland vegetation.
- A hydrodynamic Model would be developed and used to identify changes to salinity in the rivers,
- A Model-To-Marsh model would be used to translate those salinity levels across the entire marsh surface to the root zone of the plants.

- A Wetland Succession Model would be developed and used to identify changes in vegetation (or plant community) expected from the predicted salinity changes.
- We would have three methods of identifying potential changes in wetland vegetation:
 - Movement of the 0.5 ppt salinity contour, as predicted by the hydrodynamic model. This is a widely-accepted method that has historically been used when hydrodynamic models are used to predict project impacts.
 - A Marsh Succession Model developed by ATM based on sampling they had conducted in the Savannah estuary.
 - A Marsh Succession Model developed by the USFWS/USGS (Wiley Kitchens) based on sampling they conducted in the Savannah estuary.
- After development of these three tools, we may see that one of these methods is more technically defensible or more accurately predicts the observed field data than another.
- The agencies recently approved use of the hydraulic model for impact evaluation purposes on the Savannah Harbor Expansion Project.

5. The Corps stated that the initial impact analyses using the hydraulic model to predict movement of the 0.5 ppt salinity contour had been completed. The ATM Marsh Succession Model has been developed, but no results are available at this time. The USFWS/USGS Marsh Succession Model (MSM) is still under development. The decision trees have been completed, but the model has not been put together and its performance validated.

6. The group then reviewed the impact analysis parameters which it had previously developed. The basic analysis would be conducted using average river flows based on long term historical records. The Corps explained that the 1997 water year was close to the historical average and was a year in which we had field data. A sensitivity analysis would be conducted using drought conditions. The group had agreed to use 2001 river flows since they were a fairly severe drought that had occurred recently and had been observed during the field sampling for this project. Two sensitivity analyses would be performed for various amounts of sea level rise – 9 and 25 cm over the 50-year project life. Members of the team stated that since we had developed these guidelines, many researchers now expect sea level to generally be higher. The 1995 EPA report which the group had previously reviewed contained an equation that produced a mid-level prediction of a 25 cm rise for this area, based on a range of predictions made by different researchers. The USFWS provided the Corps with a document from NOAA's Center for Sponsored Coastal Ocean Research that states that the projected rise in sea level by 2095 for the mid-Atlantic region now ranges between 4 and 103 cm. After some discussion, the group decided it would like to see evaluations conducted using two levels of sea level rise — 25 and 50 cm over the 50-year project life.

The Interagency Team had previously said the Corps should evaluate impacts over a 1 March to 30 October growing season. A member of the Team questioned whether the winter period should also be considered in this southern portion of the

country. The Team said that the Spring vegetation sampling, which both versions of the model incorporate, reflects the winter growth period. In addition, the Model-To-Marsh program is based on a 3-month look-back feature, so the salinities occurring in the past 3 months are considered. The group reiterated its belief that the summer growing season was appropriate for analysis of potential impacts.

The Corps explained that the ATM and USFWS/USGS versions of the MSM had considered slightly different durations for the growing period. The ATM version had used 1 March to 30 October, while the USFWS/USGS version used a 1 March to 1 October period. The Corps explained that the ATM version of the MSM was not particularly sensitive to the delay period between river salinity and vegetation. (The model's performance was not adversely affected by varying between a 3-, 6-, 9-, or 12-month period between river salinity and observed vegetation.) The group agreed that it would be acceptable to run both the ATM and USFWS/USGS Marsh Succession Model over a 1 March to 1 October period of analysis.

Members of the Team requested the Corps provide outputs for a scenario combining sea level rise and drought. This would be more of a worst-case analysis. The group did not thoroughly discuss which alternatives this scenario should be evaluated (all alternatives or just the recommended plan), but the limited consensus appeared to be that this scenario need only be run on the recommended plan.

7. The Corps then distributed the results of its initial impact analyses using the hydraulic model and the movement of 0.5 ppt contour. The Corps had previously distributed figures showing areas within the estuary that are predicted to change from <0.5 ppt to >0.5 ppt. Some of the figures distributed at this meeting had been revised from what had previously been distributed, some had not. The group then reviewed and discussed the results.

The hydrodynamic model includes grid cells (boxes) that represent areas of marsh within the estuary. These boxes reflect the marsh areas served by the major tidal creeks. The Corps used the model to identify areas of marsh (cells/boxes) that would change from having an average of <0.6 ppt to >0.5 ppt of salinity. The analysis showed an increasing acreage affected from the 2-foot alternative to the 4-, and 5-foot alternatives. The 6-foot deepening alternative showed no additional increase. This method of evaluation does not show the extent to which the marsh areas exceed the 0.5 ppt threshold, only that they do cross the threshold with the alternative being considered.

Impact areas with the 10% exceedence salinity values were further up in the estuary than either the average (50% exceedence) or 90% exceedence (which were located lowest in the estuary). These are as expected, since they reflect probabilities of exceedence.

As expected, the impact areas are generally further up in the estuary with the drought scenarios (lower river flows).

As expected, the impact areas were generally further up in the estuary with the sea level rise scenarios, although large shifts were not predicted.

The title block on the figures should be revised to clarify which flow year was used. The legend (scales and colors) should also be revised to be the same on all figures.

8. The Team requested the Corps provide the output of the Model-To-Marsh Model. Figures showing the actual salinity predicted within the root zone across the marsh with each alternative were requested. Figures showing the changes in root zone salinity across the marsh were also requested (delta plots).

9. The Corps then presented the preliminary results of the mitigation modeling. The Corps had used salinity as the critical parameter since it affects wetlands, dissolved oxygen levels, and fishery habitats. The Corps used surface salinity because it directly relates to impacts to wetlands. The runs are the first steps at developing mitigation plans. The initial runs evaluated the effects of single changes within the estuarine network of tidal creeks and rivers. Two examples are the closure of Rifle Cut or the removal of the Tidegate.

One Team member asked the group is there is a portion of the estuary that is more important than another from an ecological perspective. They sought this information to help the Corps and the entire Interagency Team focus its attention during development of the mitigation plans. The USFWS said that it continues to maintain that the freshwater tidal wetlands in the Middle and Back River areas are extremely diverse areas that are the most ecologically valuable within the entire lower estuary (river mouth to I-95). Areas along the existing navigation channel that are highly developed have substantially less ecological value. The USFWS reiterated that it believes it can accept no further loss of tidal freshwater wetlands.

Run #5 looks promising (deepening from McCoys Cut to junction of Middle and Back Rivers) because it brings more freshwater into the Middle and Back River systems. The Corps should evaluate runs #7 & 8 because the results are not what are expected. The benefits from run #9 are in an area of lower ecological value. Runs #14, 15 & 17 show promise. Removal of the Tidegate does not show beneficial effects as far upstream as expected. Filling the Sediment Basin appears to show promise, as it benefits much of the lower half of Back River.

10. The Corps asked about the Team's view of the value of acquiring and preserving the Harrison property, which is located upstream and adjacent to US17. A few years ago, Mr. Harrison had indicated that he may be interested in selling the property if it were used by the Government for mitigation purposes. Potential restoration actions that could occur at site were discussed. The USFWS would have to prepare an EA and get approval from Washington to include the property into documents showing areas it has an interest in acquiring. The Team concluded that the site had potential value as wetland mitigation for the Project and should be evaluated by the Corps.

11. A member of the Team requested that all baseline and mitigation runs display surface, middle, and bottom salinity. They believe this information is necessary for a complete understanding of each modification and further uses the capabilities of the hydrodynamic model for decision-making.
12. A member of the Team requested that the outputs display the geographical areas that would receive a change in salinity with an alternative. Information on the amount of change (acreage) for various vegetative classifications should be provided. Information on the % change for various vegetative classifications should also be provided. (An example is that freshwater wetlands would be reduced by xx percent with Alternative Y.)
13. The Corps agreed to provide revised Impact Reports to the agencies when those revisions and corrections are complete. The updated report will be provided on CD only. Agency Team members are free to send the Corps any comments they may have after further review of the present Impact Report and impact displays or review of the revised information.
14. The Corps will continue its work on evaluating potential mitigation measures. When it has developed combinations of mitigation measures that it believes would be effective, the Corps will hold another meeting of the Interagency Coordination Team to share those results. That meeting would be prior to the Corps' completion of a Draft EIS or a request for agency concurrence on the acceptability of the mitigation plans or the project alternatives.

// DRAFT //

William Bailey
Environment and Resources Branch

CESAM-PD-E

5 June 2006
Revised 30 June 2006

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 31 May meeting of the Wetlands Interagency Coordination Team

1. Attendees:

USFWS:	Ed Eudaly John Robinette Jane Griess
EPA:	Gerald Miller Ntale Kajumba
NMFS:	Prescott Brownell
SC DNR:	Priscilla Wendt – by phone
SC DHEC:	Amy Cappellino
GA DNR-EPD:	Keith Parsons
COE:	Bill Bailey Hugh Heine Joe Hoke Gary Mauldin
Observers:	
GPA:	Hope Moorer Larry Keegan (CH2MHill)

2. The meeting was held at the USFWS Refuge Office near Savannah from roughly 1000 to 1600. The meeting was an information meeting only, not a decision meeting. The Corps was not requesting concurrence from the agencies on the level of impacts predicted for the project alternatives.

3. The following is a summary of the discussion and does not include all the information that was presented or all comments made during the meeting.

4. The Corps started by reviewing the process the Team had followed to arrive at this point:
 - Harbor deepening is expected to result in changes to salinity levels in the rivers. This salinity will move up the tidal creeks, across the surface of the marshes, to the root zone of the wetland vegetation. The changes in root zone salinity may result in changes in wetland vegetation.
 - A hydrodynamic model would be developed and used to identify changes to salinity in the rivers,
 - A Model-To-Marsh model would be used to translate those salinity levels across the entire marsh surface to the root zone of the plants.

- A Wetland Succession Model would be developed and used to identify changes in vegetation (or plant community) expected from the predicted salinity changes.
- We would have three methods of identifying potential changes in wetland vegetation:
 - Movement of the 0.5 ppt salinity contour, as predicted by the hydrodynamic model. This is a widely-accepted method that has historically been used when hydrodynamic models are used to predict project impacts.
 - A Marsh Succession Model developed by ATM based on sampling they had conducted in the Savannah estuary.
 - A Marsh Succession Model developed by the USFWS/USGS (Wiley Kitchens) based on sampling they conducted in the Savannah estuary.
- After development of these three tools, we may see that one of these methods is more technically defensible or more accurately predicts the observed field data than another.
- The agencies recently approved use of the hydrodynamic model for impact evaluation purposes on the Savannah Harbor Expansion Project.

5. The Corps stated that the initial impact analyses using the hydrodynamic model to predict movement of the 0.5 ppt salinity contour had been completed. The ATM Marsh Succession Model has been developed, but no results are available at this time. The USFWS/USGS Marsh Succession Model (MSM) is still under development. The decision trees have been completed, but the model has not been put together, and its performance has not been validated.

6. The group then reviewed the impact analysis parameters which it had previously developed. The basic analysis would be conducted using average river flows based on long term historical records. The Corps explained that the 1997 water year was close to the historical average and was a year in which we had field data. A sensitivity analysis would be conducted using drought conditions. The group had agreed to use 2001 river flows since they were a fairly severe drought that had occurred recently and had been observed during the field sampling for this project. Two sensitivity analyses would be performed for various amounts of sea level rise – 9 and 25 cm over the 50-year project life. Members of the team stated that since we had developed these guidelines, many researchers now expect sea level to generally be higher. The 1995 EPA report which the group had previously reviewed contained an equation that produced a mid-level prediction of a 25 cm rise for this area, based on a range of predictions made by different researchers. The USFWS provided the Corps with a document from NOAA's Center for Sponsored Coastal Ocean Research that states that the projected rise in sea level by 2095 for the mid-Atlantic region now ranges between 4 and 103 cm. After some discussion, the group decided it would like to see evaluations conducted using two levels of sea level rise – 25 and 50 cm over the 50-year project life (and no longer desired the 9 cm sea level rise scenario.)

The Interagency Team had previously said the Corps should evaluate impacts over a 1 March to 30 October growing season. A member of the Team questioned whether the winter period should also be considered in this southern portion of the country. The Team said that the Spring vegetation sampling, which both versions of the model incorporate, reflects the winter growth period. In addition, the Model-To-Marsh program is based on a 3-month look-back feature, so the salinities occurring in the past 3 months are considered. The group reiterated its belief that the summer growing season was appropriate for analysis of potential impacts.

The Corps explained that the ATM and USFWS/USGS versions of the MSM had considered slightly different durations for the growing period. The ATM version had used 1 March to 30 October, while the USFWS/USGS version used a 1 March to 1 October period. The Corps explained that the ATM version of the MSM was not particularly sensitive to the delay period between river salinity and vegetation. (The model's performance was not adversely affected by varying between a 3-, 6-, 9-, or 12-month period between river salinity and observed vegetation.) The group agreed that it would be acceptable to run both the ATM and USFWS/USGS Marsh Succession Model over a 1 March to 1 October period of analysis.

Members of the Team requested the Corps provide outputs for a scenario combining sea level rise and drought. This would be more of a worst-case analysis. The group did not thoroughly discuss which alternatives this scenario should be evaluated (all alternatives or just the recommended plan), but the limited consensus appeared to be that this scenario need only be run on the recommended plan.

7. The Corps then distributed the results of its initial impact analyses using the hydrodynamic model and the movement of 0.5 ppt contour. The Corps had previously distributed figures showing areas within the estuary that are predicted to change from <0.5 ppt to >0.5 ppt. Some of the figures distributed at this meeting had been revised from what had previously been distributed, some had not. The group then reviewed and discussed the results.

The hydrodynamic model includes grid cells (boxes) that represent areas of marsh within the estuary. These boxes reflect the marsh areas served by the major tidal creeks. The Corps used the model to identify areas of marsh (cells/boxes) that would change from having an average of <0.5 ppt to >0.5 ppt of salinity. The analysis showed an increasing acreage affected from the 2-foot alternative to the 4-, and 5-foot alternatives. The 6-foot deepening alternative showed no additional increase. This method of evaluation does not show the extent to which the marsh areas exceed the 0.5 ppt threshold, only that they do cross the threshold with the alternative being considered.

Impact areas with the 10% exceedence salinity values were further up in the estuary than either the average (50% exceedence) or 90% exceedence (which were located lowest in the estuary). These are as expected, since they reflect probabilities of exceedence.

As expected, the impact areas are generally further up in the estuary with the drought scenarios (lower river flows).

As expected, the impact areas were generally further up in the estuary with the sea level rise scenarios, although large shifts were not predicted.

The title block on the figures should be revised to clarify which flow year was used. The legend (scales and colors) should also be revised to be the same on all figures.

8. The Team requested the Corps provide the output of the Model-To-Marsh Model. Figures showing the actual salinity predicted within the root zone across the marsh with each alternative were requested. Figures showing the changes in root zone salinity across the marsh were also requested (delta plots).

9. The Corps then presented the preliminary results of the mitigation modeling. The Corps had used salinity as the critical parameter since it affects wetlands, dissolved oxygen levels, and fishery habitats. The Corps used surface salinity because it directly relates to impacts to wetlands. The runs are the first steps at developing mitigation plans. The initial runs evaluated the effects of single changes within the estuarine network of tidal creeks and rivers. Two examples are the closure of Rifle Cut or the removal of the Tidegate.

One Team member asked the group if there is a portion of the estuary that is more important than another from an ecological perspective. They sought this information to help the Corps and the entire Interagency Team focus its attention during development of the mitigation plans. The USFWS said that it continues to maintain that the freshwater tidal wetlands in the Middle and Back River areas are extremely diverse areas that are the most ecologically valuable within the entire lower estuary (river mouth to I-95). Areas along the existing navigation channel that are highly developed have substantially less ecological value. The USFWS reiterated that it believes it can accept no further loss of tidal freshwater wetlands.

Run #5 looks promising (deepening from McCoys Cut to junction of Middle and Back Rivers) because it brings more freshwater into the Middle and Back River systems. The Corps should evaluate runs #7 & 8 because the results are not what are expected. The benefits from run #9 are in an area of lower ecological value. Runs #14, 15 & 17 show promise. Removal of the Tidegate does not show beneficial effects as far upstream as expected. Filling the Sediment Basin appears to show promise, as it benefits much of the lower half of Back River.

10. The Corps asked about the Team's view of the value of acquiring and preserving the Harrison property, which is located upstream and adjacent to US17. A few years ago, Mr. Harrison had indicated that he may be interested in selling the property if it were used by the Government for mitigation purposes. Potential restoration actions that could occur at site were discussed. The USFWS would have to prepare an EA and get approval

from Washington to include the property into documents showing areas it has an interest in acquiring. The Team concluded that the site had potential value as wetland mitigation for the Project and should be evaluated by the Corps.

11. A member of the Team requested that all baseline and mitigation runs display surface, middle, and bottom salinity. They believe this information is necessary for a complete understanding of each modification and further uses the capabilities of the hydrodynamic model for decision-making. We had focused on surface salinity for wetland impacts because it is the high tide waters that most flood onto the marshes.

12. A member of the Team requested that the outputs display the geographical areas that would receive a change in salinity with an alternative. Information on the amount of change (acreage) for various vegetative classifications should be provided. Information on the % change for various vegetative classifications should also be provided. (An example is that freshwater wetlands would be reduced by xx percent with Alternative Y.)

13. The Corps agreed to provide revised Impact Reports to the agencies when those revisions and corrections are complete. The updated report will be provided on CD only. Agency Team members are free to send the Corps any comments they may have after further review of the present Impact Report and impact displays or review of the revised information.

14. The Corps will continue its work on evaluating potential mitigation measures. When it has developed combinations of mitigation measures that it believes would be effective, the Corps will hold another meeting of the Interagency Coordination Team to share those results. That meeting would be prior to the Corps' completion of a Draft EIS or a request for agency concurrence on the acceptability of the mitigation plans or the project alternatives.

// ss //

William Bailey
Environment and Resources Branch

CESAM-PD-E

28 Dec 2006
Revised 09 Jan 2007

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 15 December meeting of the Wetlands Interagency
Coordination Team

1. Attendees:
 USFWS: John Robinette
 Ed EuDaly (by phone)
 NMFS: Kay Davy
 SC DNR: Priscilla Wendt
 SC DHEC: Wade Cantrell
 GA DNR-EPD: Keith Parsons
 GA DNR-CRD: Kelie Moore (by phone)
 GA DNR-WRD: Matt Thomas
 COE: Bill Bailey
 Hugh Heine
 Observers:
 GPA: Hope Moorer
2. The meeting was held at the USFWS Refuge Office near Savannah from roughly 0930 to 1130. The meeting was an information meeting only, not a decision meeting. The purpose was to review the results of the EFDC modeling conducted using the movement of the 0.5 ppt salinity contour. The modeling had been conducted for both impacts (channel deepening w/o mitigation) and the first five mitigation plans (channel deepening plus mitigation).
3. The following is a summary of the discussion and does not include all the information that was presented or all comments made during the meeting.
4. We then had a brief discussion about how to include information about the extent of the salinity increase, rather than just the change to the 0.5 ppt contour. The report does contain information on the actual salinity values for each alternative evaluated. The Marsh Succession Model will also provide information on the extent of salinity increases.
5. The Corps mentioned that the USFWS had requested we consider two other mitigation measures: (1) no dredging in Middle and Little Back Rivers, and (2) blocking the original mouth of McCoys Cut. The first measure is intended to reduce project construction impacts and make the mitigation more self-sustaining. The second measure is in response to observations of flows entering McCoys Cut on an ebb tide and exiting through the original upper mouth of the river, rather than pass down through Middle and Little Back Rivers. The hope is that closing that channel would increase freshwater flows

down those two rivers. The Corps agreed to conduct EFDC screening-level runs of those measures.

6. The Corps also mentioned that it had requested the team review the two Marsh Succession Models and provide comments on their acceptability for use on this project and whether they thought one model may be more effective than the other. The comment period had ended 9 December. The Corps had received a comment from the USFWS stating that it believes the USGS version of the model is suitable and recommended its use over the ATM version. We distributed a copy of the USFWS letter (attached) to the entire team. SC DHEC asked if it could have more time to respond. Since the external reviews are still underway, the Corps agreed to accept agency comments for another 30 days. Wade confirmed later that SC DHEC would not be providing any separate comments.

7. The team had previously asked who the Corps was using for the external review of the Marsh Succession Models. The Corps reported that the following individuals have agreed to conduct those reviews: Richard Dame, Curtis Richardson, Denise Reed, and Courtney Hackney.

8. We reviewed the model run conditions the team had previously agreed upon to identify wetland impacts. These were summarized in a paper produced by the Corps on 17 August 2005 titled "Wetland Impact Evaluation Process".

9. After reviewing the setup of the summary tables, we then considered the effects of each mitigation plan.

IMPACTS ALONE. Increasing channel depth did not appear to produce an increase in wetland impacts for the basic evaluation. Some increase was observed for the 46- and 48-foot depths with drought flows. Impacts from salinities at the 10% exceedence level were generally less than those at the 50% exceedence level. This was contrary to our expectations. We briefly looked at the salinity plots and observed that the 10% exceedence levels occur further up the estuary, as we had expected. The non-linearity of the estuary (ground elevations not rising uniformly and marshes generally being fed by only a few tidal creeks) result in the responses sometimes being different than are expected.

PLAN 1. The McCoys Cut mitigation measures would reduce the extent of marshes that are adversely affected and enhance some marshes. These measures do appear to be effective.

PLAN 2. No marked changes were observed by adding the Sediment Basin to the McCoys Cut measures (Plan 1). Few changes in movement of the fresh/saltwater contour were observed. Changes may become apparent when this plan is considered using the MSM, which will show gradations of salinity change. A suggestion was made that we consider adding wetland species diversity as a benefit, rather than just changing from brackish to freshwater marsh.

PLAN 3. There appeared to be substantial effects from adding closure of Rifle Cut to the previous mitigation plan. Net positive effects are observed during normal flow conditions, while a greater amount of acres would be enhanced during both normal and drought flows.

PLAN 4. During normal flow conditions, adding the Middle River measures to the McCoys Cut measures (Plan 1) appears to increase salinity levels and worsen wetland impacts. However, during drought flows, adding these measures would improve the salinity regime and reduce overall wetland impacts.

The team mentioned that if Middle River and Houston Cut are closed, that fishing access to many of the tidal rivers in the Savannah NWR would be greatly reduced because access from the boat ramp at the Houlihan Bridge would have been effectively eliminated. The team said suggested that construction of a replacement ramp somewhere on Back River could compensate for those adverse impacts to fishermen.

PLAN 5. Adding the Sediment Basin to the previous plan (Plan 4) appears to be highly beneficial. It had the greatest number of acres enhanced of all the mitigation plans evaluated. The net effect was better with Plan 5 than with Plan 3.

Ed EuDaly and the USFWS suggested another mitigation measure to evaluate. The suggestion is to replace rerouting Middle River through New Cut. It consists of blocking Middle River just above Houston Cut and routing the Middle River flow through Rifle Cut. This would allow sturgeon to continue to use the lower end of Middle River while also protecting wetlands in the upper portions of Middle River. A sketch of the proposal is attached. The NMFS expressed concern with two aspects of this proposal. The first is that the upper Middle River would be cut off from the lower portion of the river. The second is that this option could drastically change (increase) salinity in the lower Middle River and thus affect the suitability of that reach as habitat for sturgeon. The group recognized that Rifle Cut may need to be expanded for this proposal to work effectively. After some discussion, the USFWS stated it would allow Rifle Cut to be expanded if that is necessary for this proposal to work effectively. The Corps agreed to conduct an EFDC screening-level run on this proposal.

11. The Corps will continue its work on evaluating the potential mitigation plans developed in July and August 2006. This will include analysis of potential impacts to fisheries and water quality from the mitigation plans, as well as use of at least one Marsh Succession Model as another method of identifying potential impacts to wetlands. We will also conduct screening level runs on the three additional measures suggested by the USFWS. The Corps will provide the results of those wetland analyses to the Interagency Coordination Team when they become available.

// ss //

William Bailey
Environment and Resources Branch

Memo

To: Bill Bailey, COE, Savannah, GA
 From: Ed EuDaly, FWS, Charleston, SC
 Date: December 7, 2006
 Re: Savannah Harbor Expansion, marsh succession model

Your e-mail of November 2, 2006 requested that we review the two marsh succession models (USGS and ATM) and provide comments on suitability to determine wetland impact from the expansion project. You also requested views and rationale on whether one of the approaches should be used over the other.

I believe that the USGS model is suitable to determine wetland impacts and evaluate mitigation plans. The model predicts the plant community that will be found at a site based on relationships between the plant community and salinity, soil and distance to canal. Based on the demonstration runs dated October 2006, the model is sensitive to deepening impacts and appears to predict a reasonable level of impact on the wetland community. There was good agreement between the marsh communities predicted by the model and observed dominant species (Table 4.1, Figures 4.32-4.45 in USGS/USFWS Marsh Succession Model Report, October 2006).

I recommend that the USGS model be used rather than the ATM model for the following reasons.

- During field data collection, the USGS used a quantitative approach by sampling stem density and above ground biomass to provide information on habitat structure and ecological value. The ATM field data collection determined species importance value from transects. The ATM approach is less quantitative and provides less information on habitat structure and ecological value.
- Based on the quantitative field data, the USGS used sophisticated statistical procedures to identify community groupings that are ecologically valid. These community groupings are then predicted by the model based on the environmental gradient. The ATM model used a similar environmental gradient approach but predicted only the two most dominant species rather than a discrete community. Therefore, I believe there is uncertainty regarding whether the ATM model is predicting valid community groupings.

Thank you for the opportunity to review these documents and provide recommendations. If you have questions or need additional information please contact me.



CESAS-PD-E

26 June 2007

Revised 29 June 2007

Revised 03 Aug 2007

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Interagency Coordination Meeting
Record of 20-21 June meeting

PARTICIPANTS:

<u>NAME</u>	<u>REPRESENTING</u>
Ed Eudaly	USFWS-Charleston
John Robinette	USFWS-Savannah NWR
Kay Davy	NOAA-Fisheries
Brad Gane	GA DNR-CRD
Kelie Moore	GA DNR-CRD
Matt Thomas	GA DNR-WRD
Tim Barrett	GA DNR-WRD
Paul Lamarre	GA DNR-EPD
Chris Beckham	SC DHEC-Columbia
Wade Cantrell	SC DHEC-Columbia
William Bailey	USACOE-Mobile
Paul Bradley	USACOE-Mobile
Joe Hoke	USACOE-Wilmington
Beth Williams	USACOE-Wilmington

OBSERVERS:

Hope Moorer	GPA
Larry Keegan	GPA/CH2M Hill

1. The meeting was held at the Armstrong Center in Savannah on June 20-21. The agenda is attached at the end of this document. This summary does not include all the items that were discussed during the meeting, but summarize important points and decisions that were reached.

2. The meeting was called to (A) review information in the previously distributed impact and mitigation reports, (B) determine what information is most representative, and (C) identify appropriate mitigation.

3. We began by discussing impacts to **wetlands**. We first discussed the percent exceedence information on salinity. The Corps passed out handouts that USGS (Paul Conrads) had prepared that show the agreement between surface salinity values from the Model-To-Marsh (M2M) Model with those calculated by the hydrodynamic model (EFDC) and (when available) data measured in the marsh root zone. We reviewed data for stations in Front, Middle, and Back Rivers, and both average (1997) and low river flows (2001). The 50%-tile exceedence value was identified as being the best single measurement across the range of stations of flows. It was more accurate than the 10%-tile exceedence values (90% on distribution frequency) and therefore the best single exceedence value. Therefore, the group agreed for the Corps to use that parameter (50%-tile exceedence value) when assessing surface salinity levels for wetland effects.
4. We then reviewed **river flows**. Average river flows generally represent 50% of the flow distribution, while low flows and high flows each represent other 25% portions of the flow. Since average conditions represent more of the entire range of flows, the group reaffirmed our previous decision to use that condition in our basic impact evaluation.
5. We discussed **sea level rise**. As requested by the agencies, the reports contain information on conditions with both a 25 and 50-cm rise in sea level. The 25-cm rise is roughly the average of the range of sea level rise predictions for this area over the next 50 years. The 50-cm rise is at the high end of predictions for that time period. Both of those conditions would occur at the end of the 50-year planning time horizon. The group agreed that we should conduct our basic impact evaluation using conditions that would occur near the time of construction. Therefore, we decided to use the existing sea level for the basic impact evaluation.
6. We then discussed **mitigation for wetland impacts**. The evaluation procedure we have available uses the position of the 0.5 ppt surface salinity as the distinction between the locations of fresh and brackish marsh. The 0.5 ppt salinity value is a commonly accepted threshold between those two types of marsh vegetation. With the flows into tidal creeks that serve a large area of marsh, the procedure is essentially an ON/OFF switch for impacts. Because of this, the procedure shows irregular wetland impacts (rather than a smooth consistent increase) with increasing salinity levels. To address this we distributed information we had just prepared showing the effects of ranges of salinity (-0.5, 0.5-1, 1-2, 2-4, >4 ppt). This new format provides information on the effects on low salinity brackish marsh. This format requires someone to extend salinity contours from the rivers out into the marsh. Although drawing this contour is somewhat subjective, the group felt that it was acceptable if all the extrapolation is performed using the same criteria. Use of a single analyst (using the same criteria) would further normalize the results. One member suggested we graph the incremental wetland

acreage by river mile for each of the 3 rivers (Front, Middle, and Back). This could remove some of the subjectivity of drawing contours. The group requested we provide the salinity range information for all the depth alternatives and that we include columns showing the net acreage effect on each of these 5 wetland categories.

Plans that substantially reroute flows within the estuary were found to reduce the tide range upstream of the Houlihan Bridge. Some plans reduce the range 0.2-0.3 meters, while others reduce it 0.3-0.5 meters. USGS (Wiley Kitchens) measurements showed 1-1.5 feet of flooding of the freshwater marsh sites. One suggestion was to recalculate the marsh impacts with marsh elevations included. The USFWS expressed its opposition to conversion of freshwater wetlands to uplands. The USFWS also expressed concern that the loss of flooding over extensive marsh areas would eliminate use of those areas by small fish. Because of these concerns, we agreed to drop consideration of Plans 4, 5, and 8 and concentrate on Plans 1-3. The Corps would proceed with its modeling of Plans 6 and 7 using Plan 3 as a base.

The Corps provided the following information on the diversion of water from the Savannah River into the Middle and Back River system:

River Flow	48-foot Channel	48-foot Channel + Plan 1
	<u>No diversion</u>	<u>(With Diversion Structure)</u>
McCoys Cut	583 cfs	1130 cfs
Little Back River	429 cfs	646 cfs
Middle River	333 cfs	663 cfs

These numbers are based on average flows down the Savannah River.

We then discussed **restoration or compensation for wetland impacts**. The USFWS reiterated its position that because of previous losses over time, we cannot afford to lose additional tidal freshwater wetlands. They stated that due to the large historic loss of tidal freshwater wetlands within the estuary, they would not consider any out-of-kind replacement as acceptable mitigation for project impacts to the remaining tidal freshwater wetlands. Acquisition and conversion of the Poindexter property was discussed. The property is located on the eastern side of the Refuge and is managed by private landowners for waterfowl hunting. Diked portions of the site are seasonally flooded from the freshwater diversion canal. In the past, crops were grown in the diked areas during the summer before they were flooded in the fall. We understand that the owners use soil management practices similar to those used by the Fish and Wildlife Service to operate their impoundments. Based on that information, Federal acquisition and management would not provide substantially different environmental values. This would substantially reduce the number of wetland mitigation credits could be claimed. In 2006, the owners were approached with an offer to sell the property for development, so there is a threat that the property may be developed in the near future. An imminent threat of development is a factor which increases the amount of mitigation credits which can be claimed for protecting a site. The USFWS is interested in ownership of the property, but the site is not presently within their approved acquisition boundary. If the property is acquired and the dikes retained, the Federal ownership would protect the site from

development and result in the diked areas being considered managed wetlands. The dikes would control water access to the site, so that acreage could not be considered tidal freshwater wetlands. The controlled access would mean that those acres would not provide the fishery habitats provided by natural wetlands. Those fishery functions would have to be made up separately. If the property is acquired and the dikes removed, brackish marsh would move in and occupy the previously diked areas. Since nearby brackish marsh provides high ecological values for fisheries, removal of the dikes could receive substantial credit for fishery habitats. NOAA-Fisheries prefers removal of the dikes if the property is acquired. (Note: This wording reflects subsequent discussion between the USFWS, NOAA-Fisheries, SCDHEC, and the COE on 18 July.)

The USFWS is interested in acquisition of upriver areas that are already within their approved acquisition plan. They stated that such acquisition would not be acceptable for loss of tidal freshwater wetlands.

The vast majority of the present tidal freshwater marshes are located within the Savannah National Wildlife Refuge. The group agreed that all tidal freshwater marshes within the Refuge possess the same ecological value.

The USFWS requested we include closing the lower (western) arm at McCoys Cut in future modeling of mitigation plans. They observed ebbing flows passing from McCoys Cut back out to the Savannah River. The hope is that closing that reach would increase flows down into the LBR/MR area. The Corps stated that if we pursue excavation of berms (previously deposited fill) along the banks of Little Back and/or Middle Rivers, placing those sediments in the lower arm would save substantial construction costs. Filling the arm would also result in creation of tidal freshwater wetlands. The USFWS said that the area needed to be surveyed for freshwater mussels. Subsequent to the meeting it was determined that a consulting firm with trained mussel divers would be required for this survey. The USFWS expressed concern about filling the lower arm and would rather see it plugged on the Little Back River side. That action would create a slough and provide fishery habitats for many years.

We discussed work at the Sediment Basin. The agencies have expressed concern about water quality (turbidity) impacts if sediments are directly deposited in the basin. The Corps said that initial modeling showed a narrow sill at the lower end of the basin would not stop salinity moving upstream with the tide. Momentum appears to carry the tidal flow over the top of a narrow sill and continue some distance upstream. The mitigation modeling is based on the Sediment Basin being filled to the same depth as upriver of the Tidegate (depth of -3.85 meters). Constructing only a sill would reduce the beneficial aspects on salinity of removing the Basin from operation. Sediments that would be excavated during a harbor deepening are primarily sands. The sediment composition does vary by station and depth. Placing silty or clay-dominated sediments in the Basin with a hydraulic dredge could produce extensive turbidity. Placement of clay-dominated sediments with a clamshell would produce substantially less turbidity.

Operations that produce more turbidity could be conducted during winter months which are less stressful to biota. We agreed to continue this discussion later.

7. We discussed impacts to **fisheries**. We started with Shortnose sturgeon. The modeling shows a deepening could reduce sturgeon habitat substantially. The adverse effects are most pronounced in the adult life stage during August. The wetland mitigation plans do not reduce those impacts. The impacts appear to be salinity related and not caused by reductions in dissolved oxygen. One method of mitigating for those impacts is to construct the fish bypass channel that had previously been proposed at the New Savannah Bluff Lock & Dam (NSBL&D). The group felt that this structure would help sturgeon, as it would open up new areas upstream for spawning. They believe it would also help American shad and other anadromous fish species. From an ecological perspective, removal of the NSBL&D would be more effective than implementing bypassing fish around the structure. The Corps explained that although Congress has not funded rehabilitation of the lock and dam (with its bypass), local governments continue to position themselves for the continued existence of that dam. The Corps would not consider proposing removal of that structure as part of this project unless someone first discusses the concept with a local government representative and obtains an indication that they would not oppose such a proposal. The group could not identify a method other than action at NSBL&D to mitigate for adverse impacts to this species. The Corps will coordinate further on this issue with the St. Petersburg office of NOAA-Fisheries.

We reviewed impacts to **American shad**. Those range from <1% loss of habitat in January and May to a loss of 7% in August with Plan 3. The out-migration of juveniles to the ocean would commence late summer and continue through fall and winter. Since the criteria for acceptable habitat for this species consists of only a dissolved oxygen level, the oxygen injection system should remove these impacts and likely result in net improvements in habitat volume.

We reviewed impacts to **Striped bass**, which result in roughly a 25% loss in acreage of acceptable habitat across the three life stages we examined – spawning, eggs, and larvae (50% flow, 6-foot deepening, Plans 1-3). GA DNR-WRD believes that average river flows (50%-tile) are appropriate for identifying project impacts.

Although the habitat criteria include several parameters, velocity and salinity seem to be the most important ones. The Corps examined ways to increase velocity in the LBR and MR areas. This included use of pilings, rocks, and additional flow volume. Increasing flow in the Savannah River during April by 500 and 1000 cfs did not result in noticeable improvements. Further increases in flow are also not likely to be effective, as even flows at the 80% cumulative frequency level do not reduce the adverse effects of a deepening. The Corps will check the actual velocity numbers to identify the level of effect, as well as examining whether the velocity is above or below the defined threshold.

GA DNR-WRD requested we examine inclusion of a flow partitioning structure at the junction of LBR and MR as a potential adaptive management tool. This could allow

us to modify the distribution of flows in that system to improve areas that provide more and/or better habitats for striped bass.

The Savannah River striped bass population is currently not used as the sole source of broodfish for GA's statewide striped bass stocking program. Both SC and GA recently opened the recreational fishery for this species. The stocking program appears to have been successful, as a good number of large adult fish occur in the estuary. Records indicate that some natural spawning has resumed in the last 2 year classes checked (2003 and 2004). Sixty percent of the 2004 year-class was naturally spawned. Dr. Bill Daven's 1999 report of egg transport identified 3 locations in the spawning area with a silty bottom substrate. GA DNR did not believe that further field study of that issue was needed. Questions were raised about the potential value of cleaning the sediments in those areas to make that area more productive. Unknowns about the flow velocities keep anyone from knowing whether the sites would silt back in again.

GA DNR-WRD and USFWS suggested we further examine closing the lower arm of McCoys Cut during future modeling. Ebbing flows have been observed passing from the lower arm of McCoys Cut (original channel) back out to the Savannah River. The hope is that closing that reach would increase flows down into the LBR/MR area. They also requested we examine not deepening through McCoys Cut. This may be a way of increasing velocities through that upper LBR/MR area.

The group could not identify any other physical action that could be examined to increase Striped bass habitats in the project area. If the 25% loss in habitat remains in the final plans, funding a striped bass culture/stocking program may be the only way to compensate for the unavoidable impacts to this species.

We reviewed impacts to **Southern flounder**. Habitat losses for this species are substantial (up to 47% with 6-foot deepening and Plan 5). However, since the criteria for acceptable habitat for this species consists of only a bottom slope and dissolved oxygen components, the oxygen injection system should remove these impacts and likely result in net improvements in habitat volume.

8. We discussed impacts to **water quality**. GA DNR identified two statements on page 7 in the Impact Report that were questionable. The Corps concurred that the wording should be revised and said that we would revise the wording when it is published in the GRR or EIS.

EPA is considering revising the water quality model in LBR and MR (6 layers to 1). SC DHEC reiterated that the water quality model was not optimized for that area and that the D.O. results for that area are better used on a comparison basis. The Corps said that if the model is revised, it would need a new calibration report that was independently reviewed before it could vary from the present model which has gone through that process. No participant knew if EPA had obtained new SOD samples, as recommended by SC and previously proposed by EPA.

GPA is conducting a demonstration project of a dissolved oxygen injection system starting at the end of July and running for 6 weeks. They will produce a report with the results of their monitoring program. Agencies suggested that the Corps incorporate information obtained during the monitoring into the final predictions for performance of the proposed D.O. systems.

The Corps stated that the Water Quality Team had previously recommended that the upper two locations identified in the Task II Report on the D.O. system not be constructed. Those sites were identified as being best from a modeling perspective, with no consideration for land availability. One of the sites (McCoys Cut) is located within the Savannah National Wildlife Refuge with no land access or power. The other (Mill Stone Landing) is located at an upriver site. The Corps intends to combine the oxygen proposed from those sites into others located more in the harbor area. The site at Houlihan Bridge would likely be expanded to compensate for eliminating those upriver sites. Another site could be required around the Sediment Basin. The final modeling will identify the most cost effective tradeoff of number of stations vs. total volume of oxygen to be added.

The Corps will try to find information on the success of the demonstration project of oxygen injection in a California harbor.

One comment on the siting of the oxygen injection facility near the Houlihan Bridge is that if the facility is located between the Front and Middle Rivers, the same facility could be used to improve oxygen in both rivers with lines going to each river. The only high ground with road access between Front and Middle Rivers is CDF 1N, which is located within the Savannah National Wildlife Refuge. The USFWS would have to find that use of the site compatible with the overall goals of the Refuge.

9. We discussed **monitoring and adaptive management**. The Corps distributed a framework for a monitoring and adaptive management plan for the project. The group decided that agencies should be involved in decisions about implementing adaptive management features. The public should be informed of the results of the monitoring, but could not assist in making Federal and State decisions.

There was a recommendation that we monitor forested wetlands. This would be helpful in ensuring that the project does not unexpectedly impact this resource. Another recommendation is that we include a flow partitioning structure at the junction of LBR and MR. This could allow us to modify the distribution of flows in that system to improve areas that provide more habitats for Striped bass.

10. We discussed other **mitigation** measures. Filling the Sediment Basin (or allowing it to fill) would help low salinity marshes that provide extensive fishery benefits and display large species diversity. Removal of the Tidegate could affect the tide cycle and velocities upstream of that site.

The Corps should remove "Increase flows down the Savannah River" from its list of possible mitigation features. It should also remove "Modify Tidegate into fishing pier" from its list of possible mitigation features, as such a pier would have substantial liability concerns. It should also remove "Tybee NWR" from its list of possible mitigation features, as there is nothing this project could do to improve that Refuge. The Corps should move up in its priority list the measure to "Block western connection at McCoys Cut". We should add "Restore wetlands at CDF 1S" to the list. Depositing sediments in the nearshore area off Tybee would help Wassaw Island. Add as a possible Other Measure the cleaning of silty sediments in LBR and MR to restore the sandy bottom substrate so that it would be more suitable for Striped bass.

11. Kay recommended that the Corps initiate formal consultation with NOAA on Essential Fish Habitat and compliance with the Endangered Species Act, now that information on project impacts is available.

12. The meeting was beneficial. We were able to narrow the focus of our consideration of the data that has been produced. The Corps will perform some more modeling of project impacts. We agreed to evaluate the Tidegate (Plan 6) and Steamboat Cut features (Plan 7) based on Plan 3, rather than Plan 5. The Corps will evaluate the feasibility of grading down a high ground site to produce tidal freshwater wetlands. The Corps will provide the results of that work to the agencies when it becomes available.

// ss //

William Bailey
Physical Scientist

SAVANNAH HARBOR EXPANSION PROJECT

INTERAGENCY MEETING

JUNE 20 & 21, 2007

AGENDA

WEDNESDAY

OPENING & INTRODUCTIONS

9:30 – 9:45

- Purpose of Meeting
 - Review information in Impact and Mitigation reports
 - Determine what information is most representative
 - Identify appropriate mitigation

WETLANDS

9:45 – 12:00

LUNCH

12:00 – 1:00

WETLANDS (Cont)

1:00 – 3:30

FISHERIES

3:30 – 5:00

THURSDAY

FISHERIES (Cont)

8:30 – 10:00

WATER QUALITY

10:00 – 12:00

LUNCH

12:00 – 1:00

OTHER MITIGATION MEASURES

1:00 – 2:00

MONITORING & ADAPTIVE MANAGEMENT

2:00 – 3:00

WRAP-UP

3:00 – 3:30

Meeting Minutes
Savannah Harbor Expansion (SHE) Project Model Development
January 11, 2005 at Tetra Tech, Inc., Atlanta, GA

Attendees:

Joe Hoke, USACE Savannah District
 Bill Bailey, USACE Savannah District
 Margaret Tanner, MACTEC
 Larry Neal, MACTEC
 Paul Lamarre, GAEPD
 Jim Greenfield, EPA Region 4
 Bob Scanlon, City of Savannah and Harbor Committee
 Steven Davie, Tetra Tech
 Yuri Plis, Tetra Tech
 Will Anderson, Tetra Tech
 via conference call:
 Larry Keegan, Lockwood-Green
 Hope Moorer, GPA
 Chuck Watson, Kinetic Analysis Corporation
 Sri Rangarajan, HydroQual
 Paul Conrads, USGS
 Card Smith, USACE
 John Hamrick, Tetra Tech

Meeting Agenda:

1. Overview of Tetra Tech's contract with USACE/GPA.
2. Schedule of work tasks.
3. Specific work tasks for discussion:
 - a. Update on model enhancements
 - b. Preliminary production runs & output
 - c. Uncertainty analysis (Kinetic Analysis Corporation)

Discussion Items:

- Steven Davie presented an overview of the modeling contract with the USACE, an overview of the schedule, and a status report on Tetra Tech's work. Tetra Tech is under contract to the USACE Savannah District to provide the following tasks: EFDC modifications and re-calibration, re-evaluate WASP calibration, uncertainty analysis, EFDC/WASP training, EFDC/WASP reports, and model application files.
- Modeling Schedule:
 - Initiated Work – Oct 6, 2004
 - EFDC Training – completed on Oct 26-28, 2004
 - WASP Training – To be determined
 - Draft Uncertainty Analysis – completed on Jan 7, 2005
 - Final Uncertainty Analysis – Jan 31, 2005
 - Draft EFDC and WASP Report – Feb 2, 2005
 - Final EFDC and WASP Report – March 9, 2005 (or based on agency comments)

- **Model Enhancements:**

- Re-fined grid resolution
- Updated bathymetry
- Marsh interactions

- **New Grid Resolutions:**

- ~ 950 horizontal cells, probably end up with 900 to 950 cells.
- 657 in TMDL grid and 1,368 in finer grid.
- Running with 6 vertical layers.
- Upstream boundary at Clio ~ 61 miles from Fort Pulaski
- Downstream boundary ~18 miles offshore from Fort Pulaski
- Man-made connections included (McCoys Cut, Rifle Cut, Drakies Cut, New Cut closed, Tide Gate)
- Shipping channel defined - matches channel configuration (GIS from Corps)
- Revised enhanced grid incorporating agency comments such as smoothed channel mouth, merged two channel cells into one, merged multiple cells next to channel into one on each side for most areas, except Kings Island Turning Basin and Elba Island Bight/Sediment Basin area.
- Handout distributed on Tetra Tech's December 10, 2004 Technical Memorandum No 1 on the grid resolution.
- Handout distributed summarizing the grid comments was given based on December 10, 2004 Tetra Tech memo.
- The grid convergence test has not been completed and will be discussed in the final report.

- **Bathymetry Data Sources:**

- USACE Annual Surveys (1999, 2002) for the navigation channel.
- USGS SNWR (2004) for Front, Middle, Back, and Little Back Rivers.
- USACE Upstream of I-95 (1999) for upper Savannah River.
- NOAA Surveys (1980's) - offshore non-channel and South Channel.

- **Marsh Interactions**

- Using Q-Zones developed by ATM marsh report and implemented in the TMDL grid.
- TMDL grid approach did fairly well except on strong spring tides.
- Enhanced approach will use external cells inundated only during strong spring tides with wetting and drying as an option.

- **Production Run Scenarios:**

- Tetra Tech has been using the TMDL grid as a "screening level" model to work out details associated with deepening production runs, such as how to represent the deepened channel and how to produce output. The USACE stated that developing a program to process and organize all output was not part of the scope but will help in future production run scenarios. (The Tetra Tech scope calls for setting up the bathymetric files for the production runs, but does not require delivery of output files.)
- Baseline conditions were August 1999, which is consistent with EPA's draft DO TMDL, and the project conditions were the 46-foot channel. The 46-foot channel was represented in the TMDL grid by increasing the depths in the navigation channel by 4 feet (1.2 meters).
- Habitat suitability requirements were shown through contoured plots of the grid for the following: Striped Bass (April) spawning, egg development, larval development; Southern Flounder (August); American Shad (January, May, August); and Shortnose Sturgeon (January, August).

- Other EFDC/WASP output was discussed such as plan view of salinity and D.O. distributions, 2-D (longitudinal and vertical) distributions, salinity statistics horizontal distributions, water volumes with D.O. increments, ship channel, entire Middle and Back Rivers, statistics of salinity responses to alternatives, Ship Channel, Entire Middle and Back Rivers, USGS gages
- Uncertainty Analysis:
 - Chuck Watson from Kinetic Analysis Corporation (KAC) presented preliminary results of the uncertainty analysis (UA) on the TMDL model grid.
 - KAC evaluated the quality and quantity of data available for the development of the hydrodynamic and salinity and water quality models.
 - KAC evaluated the uncertainty of the TMDL configuration of the EFDC model (aka the TMDL model)
 - KAC has made preliminary recommendations for the development of the enhanced grid model.
 - KAC concentrated on salinity – good data, checks mass transfer – with seven sets of simulations: 1) Baseline, 2) +1m Bathymetry, 3) -1m Bathymetry, 4) Friction bias to 0.0, 5) Friction bias to 0.1, 6) Bathymetry set to 1992, 7) Randomly perturbed bathymetry (10 at 10%).
 - KAC used "R" package for automated analysis and plot generation, spot checked manually using JMP (from SAS Institute)
 - KAC's preliminary recommendations include: 1) enhanced grid model calibration should take care to avoid over calibration to 1997/1999 conditions, 2) long term data should be partitioned to include both calibration and blind test (verification) runs, 3) use of bottom roughness for calibration should be carefully examined to ensure additional uncertainty is not being introduced in the calibration process, and 4) bathymetry should be for average conditions – not just immediately after maintenance or dredging. This could be a data problem having only data before and after maintenance rather than for average conditions.

Next Meeting

Scheduled for February 16, 2005 at EPA Region 4 to review the draft modeling reports and go over comments. Agency comments will be due to Joe Hoke by February 25, 2005. Please be prepared to review the reports during this time period.

From: Bailey, William G. SAM@SAS
To: "Kelie Moore@coastal.dnr.state.ga.us"; "Keith.Parsons@mail.dnr.state.ga.us"; "Matt.Thomas (E-mail)"; "Wade Cantrell"; "beckhaic@dhc.sc.gov"; "Curtis Joyner (joynercm@dhc.sc.gov)"; "Priscilla Wandt"; "Kay Davy (kay.davy@nasa.gov)"; "Ed.Fudaly@fws.gov"; "john_robinette@fws.gov"; "Lord.Bob@epamail.epa.gov"; "Ted Bisterfeld (bisterfeld.ted@epa.gov)"
Cc: "Jane_Griess@fws.gov"; "kitchensw@wec.ufl.edu"; "katumba.ntale@epamail.epa.gov"; "jrklaql@dhc.sc.gov"; "PRESTOHS@dhc.sc.gov"; "Pete Wilber"; "Brad_Gane@dnr.state.ga.us"; "Jeff_Larson@dnr.state.ga.us"; "Ed Duncan (E-mail)"; "Garrett, Thomas A SAS"; "hmoorer@qaports.com"; "Lamy.Keegan@ch2m.com"; "Bradley Kenneth P SAM"; "Heine, Hugh SAW"; "Small, Daniel I. SAD"; "Barnett, Dennis W SAD"
Subject: Savannah Harbor Expansion Project: Wetlands Interagency Coordination Team -- Decision on Model-To-Marsh Revision
Date: Thursday, April 05, 2007 10:16:44 AM
Attachments: EXPAN.LCA M2M revision decision -- Mar 02 V2.doc

I believe I informed you that we were experiencing problems with applying the Marsh Succession Models to the mitigation plans. We traced the problem to the Model-To-Marsh component -- the link between the EFDC hydrodynamic model and the Marsh Succession Models.

The USGS had developed the Model-To-Marsh (M2M) linkage, so we requested a proposal from them to revise it so we could use it on the mitigation plans. They provided a proposal, which the Federal agencies reviewed and discussed. The SOW was for \$110K and would take about a year. We felt that we could not be reasonably certain that the predictions made by the revised M2M would be reliable. Therefore, the Federal agencies (EPA, USFWS, NMFS and Corps) concluded that the proposed modification is not warranted. I have attached the decision document that led us to that point. The document includes the proposed SOW.

This action means that evaluation of the mitigation plans for wetlands will be performed through use of the EFDC hydrodynamic model. With that model, we will look at movement of the 0.5 ppt salinity contour and the wetlands that change from <0.5 to > 0.5 ppt salinity.

We will use the Marsh Succession Models to review the impacts predicted by the EFDC model from a deepening of the harbor without any mitigation. The comparison between the results from those three different methods will provide information on the reliability of the EFDC results.

If you have concerns about this decision, including wanting the Wetlands Interagency Coordination Team to meet to discuss the issue, please let me know by 20 April.

William Bailey
 912-652-5781

DECISION DOCUMENT

SUBJECT: Savannah Harbor Expansion Project;
Proposed revision to Model-To-Marsh linkage

1. A problem has developed with use of the Marsh Succession Models (MSMs) on some of the mitigation scenarios. The scenarios affected are those that substantially modify flows between the Front, Middle, and Back Rivers. The problem results in an overstatement of salinity in the Middle and Back Rivers, rendering the MSMs unreliable to evaluate wetland impacts on those scenarios. We've identified the Model-To-Marsh linkage (M2M) as the source of the problem.

2. The following two courses of action are available.

In Option 1, we would use the EFDC salinity model to identify wetlands that shift from fresh to brackish species. We would do this by examining what marshes change from <0.5 ppt to > 0.5 ppt salinity. We would apply that technique to both the "impact" and "mitigation" runs. We would use the MSM to provide more detail on the vegetation changes on the "impact" runs, thereby checking the EFDC results and increasing our confidence in the EFDC results. We would not use the MSM for "mitigation" runs. This Option describes our present condition and plan for proceeding with the wetland evaluations.

In Option 2, we would use the EFDC salinity model to identify wetlands that shift from fresh to brackish species. We would apply that technique to both the "impact" and "mitigation" runs. We would revise the M2M as described in the enclosed proposal and apply the MSM to both "impact" and "mitigation" runs.

3. The Lead and Cooperating Agencies discussed this issue on 8 March 2007. The MFR, which summarizes the discussions of the meeting, are attached.

4. The USGS would lead the work to revise the M2M. They estimate it would take \$110,750 and 12 months to produce a final product (including internal review). The work would include participation of an interagency team to identify flow paths from the rivers to specific locations in the marsh.

5. The following summarizes the pros and cons of proceeding with the proposed revisions (Option 2):

PROS

- The revisions would allow the Marsh Succession Models to be applied to all mitigation scenarios presently being considered. At this time, the MSMs do not give reliable results when applied to mitigation scenarios that substantially alter flows between the three rivers (Front, Middle and Back Rivers).
- The revisions would include the use of an interagency team, increasing the likelihood of those agencies approving the final product.

CONS

- The EFDC model in conjunction with spatial data can acceptably be used to identify movement of the 0.5 ppt contour, allowing predictions of change between freshwater and brackish marsh. Use of the MSM on the impact runs will provide a comparison of the EFDC and MSM impact predictions (without mitigation).
- Revision of the M2M would cost roughly \$110,000 and possibly delay decisions on the project by a year. The 1998 Feasibility Report estimated project net benefits (benefits – costs) to be about \$35,000,000 per year.
- The effectiveness of the proposed revisions and the reliability of the MSM results will not be known until after the work is performed. The proposal acknowledges substantial uncertainty regarding accuracy of salinity predictions even with the proposed revisions.
- The revised M2M may have to be further modified if additional mitigation scenarios are developed. The further modifications would require additional costs and possibly further delay decisions on the project.

6. Conclusions.

The project has one accepted method of identifying potential impacts to wetlands (using EFDC to identify movement of the 0.5 ppt contour).

The accuracy of that model can be judged by use of the Marsh Succession Models for impacts from deepening scenarios without mitigation.


Therefore, the revised M2M – and the Marsh Succession Models – are not required to identify wetland impacts from the various harbor deepening alternatives (with mitigation).

Implementation of the proposed M2M revisions would cost roughly \$110,000 and possibly delay decisions on the project by a year.

The additional information that may be obtained by revising the M2M does not appear to be sufficient to justify the cost of the modifications or delay to the project.

7. Recommendation.

Based on the information provided in this document and its enclosures, I believe that implementation of the proposed Model-To-Marsh revision is not warranted and recommend that the modifications not be pursued.



William Bailey
Physical Scientist
Mobile/Savannah Regional Planning Center

8. Concurrence:

	<u>CONCUR</u>	<u>NON-CONCUR</u>	<u>INITIALS</u>
Joseph Hoke Hydraulic Engineer USACE Wilmington/Savannah Engineering	_____	_____	_____
T. Alan Garrett Project Manager USACE Savannah District	_____	_____	_____
Ed EuDaly Senior Biologist USFWS Charleston	_____	_____	_____
Ted Bisterfeld Ecologist EPA Region 4	_____	_____	_____
Kay Davy Fishery Biologist NOAA Fisheries Charleston	_____	_____	_____

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Lead & Cooperating Agency meeting, 08 March 07

1. The meeting was called to learn more about a proposal (attached) to revise the Model-To-Marsh (M2M) component of the Marsh Succession Models. Alan Garrett, Corps Project Manager, chaired the meeting. A list of attendees is attached.
2. Bill Bailey provided an overview of the problem.

The Corps has successfully run the Marsh Succession Models to identify changes in wetlands from the various channel deepening scenarios. These are the "impact" runs. As we applied the models to the mitigation scenarios, we observed unexpected results. For some mitigation scenarios, the EFDC runs predict a decrease in salinity but the MSMs show shifts to more saline wetland species. Upon further inspection, we observed that on those runs the M2M component was providing higher root zone salinity values than were occurring in nearby rivers. The M2M extrapolates riverine salinity values from seven sites to root zone salinity values across the entire marsh surface. Apparently the limited number of points from which the M2M is starting its extrapolation leads to inaccuracies in mitigation scenarios that substantially alter flows between the three rivers (Front, Middle and Back Rivers). The M2M takes higher salinity levels on the Front River and uses them as a basis for incorrectly predicting higher salinity levels in portions of Middle and/or Back Rivers.

3. We described two avenues through which the project could move forward.

In Option 1, we would use the EFDC salinity model to identify wetlands that shift from fresh to brackish species. We would do this by examining what marshes change from <0.5 ppt to > 0.5 ppt salinity. We would apply that technique to both the "impact" and "mitigation" runs. We would use the MSM to provide more detail on the vegetation changes on the "impact" runs, thereby checking the EFDC results and increasing our confidence in the EFDC results. We would not use the MSM for "mitigation" runs.

In Option 2, we would use the EFDC salinity model to identify wetlands that shift from fresh to brackish species. We would apply that technique to both the "impact" and "mitigation" runs. We would revise the M2M as proposed and apply the MSM on both "impact" and "mitigation" runs.

4. Paul Conrads and Ed Roehl provided an overview of the proposed SOW to revise the M2M. This write-up is only a small part of the description Paul and Ed provided.

The present M2M starts with river flows and tidal conditions. It adds to that foundation riverine salinity values from the EFDC model. The present M2M could be considered more a far-field approach since it uses a limited number of riverine salinity values and extrapolates them across the entire marsh surface. It determines a relationship between river salinity and the well gages through time-delayed input signals and moving window averages between river salinity and pore-water salinity. The M2M was designed to primarily identify changes in root zone salinity that occur longitudinally in the estuary (along the length of the river).

The proposed revisions would allow the M2M to better identify lateral changes in root zone salinity that occur across the estuary (between different rivers or away from a single river). These revisions would start with a more detailed network of river salinity stations. It would then extrapolate those values to nearby areas of marsh. This could be considered more of a near-field approach. Additional marsh well data would be obtained to establish strong relationships between river and marsh root zone salinities. The Q-zone approach would be used as a starting point for the river to marsh flow paths. An interagency panel would be used to identify those pathways and guide the model revisions.

Uncertainty in the results of this M2M revision include three components: (1) Quality of the original data, (2) Quality of the data used to forecast or hindcast to fill in missing data, and (3) Quality of the data from EFDC. These are the same sources of uncertainty with use of the present M2M. This revision will require development of additional synthetic data to fill in records for the extra river sites that will be used.

5. The group then asked questions of Paul and Ed Roehl about the proposed work.

What will be the reliability of the results when using more synthetic data? Would the public accept the use of more synthetic data? RESPONSE: The reliability will not be known until the model is produced. However, data for the existing M2M show it is highly reliable for use with the present configuration of the estuarine rivers. As with any model, the ultimate accuracy of the revised model's predictions would not be known until after post-construction monitoring is performed.

What will be the reliability of the results when using data from the GPA stations? Those data were determined to be unacceptable in development of the existing M2M. RESPONSE: Data from the GPA stations were not used in the existing M2M primarily because of their short period of record. A much longer – and therefore more reliable – record exists for the USGS gages. The GPA stations would be used in the model revisions to provide a finer grid of river locations from which to extrapolate salinity levels across the marsh surface. The finer grid should increase the accuracy and reliability of the model predictions within specific marsh areas. The additional stations

would also allow a more detailed quantification of the sensitivity of marsh areas to local riverine conditions. The GPA stations also provide data obtained during 1997 – the flow conditions that are being modeled during the mitigation analyses. The reliability of the revised models would not be known until they are developed.

What are the differences between the GPA stations, marsh gages, and USGS gages?

RESPONSE: The differences include both duration and density. The marsh gages provide salinity information in the marsh root zone at 7 sites from 1999 to 2005 and 10 GPA sites from 1999 to 2002. The GPA stations have 14 riverine stations with data from portions of 1997 and 1999. The USGS gages provide salinity information at 4 riverine sites for many years.

What will be the reliability of the final predictions if the development of the revised model includes extensive synthetic data? RESPONSE: Models are regularly developed and applied when only limited actual data exists. Synthetic data is an accepted technique in the modeling community when insufficient historical data exists.

If new algorithms need to be developed for each mitigation plan, it could appear that we have developed a model just to show the results we want on the plan we want. If the same model is not used to evaluate all plans, how can we ensure we are evaluating all plans to the same degree of accuracy? RESPONSE: The same procedures would be followed to evaluate all plans, even if the models differ.

The existing M2M and its algorithms appear to work well with the present river configuration. If new algorithms only are effective for the mitigation plans that substantially modify river flows, how can we ensure their accuracy? RESPONSE: The change from a “far-field” approach to a “near-field” approach increases the likelihood that the revisions would be accurate when flows are substantially modified. The reliability of the results will not be known until the models are developed.

The MSM provides more detailed information on expected wetland changes than does the EFDC model. Do we really need those more detailed predictions for each mitigation scenario? RESPONSE: If reviewers want the detailed information, the revised M2M is the only way to obtain it.

Although a provisional version may be available in 5 months, the project will need a fully accepted version before it could release a report containing results using this approach. The final report is scheduled to be available in 12 months. If complications occur that delay the work, the date would extend further. A 12-month delay in the project would be a major impact to GPA. RESPONSE: Reaching a timely decision on this project is a goal of all the Cooperating Agencies.

The proposed revisions would likely extend the duration of the project. That extension may decrease the reliability of other analyses, requiring they be updated. That would require additional time and money. RESPONSE: Reaching a timely decision on this project is a goal of all the Cooperating Agencies.

Some of the mitigation scenarios appear to decrease the tidal range. The USFWS may not be able to support those plans as a substantial decrease in the depth of flooding over the marsh may adversely affect nekton use of those areas. The plans which have the most effect on tidal range are the ones that substantially alter flows between the three rivers.

RESPONSE: The proposed M2M revisions would not be beneficial if the final mitigation plans do not include measures that substantially alter flows between the three rivers.

Have the status and trends of wetlands since the last harbor deepening been taken into account? RESPONSE: Both the M2M and the MSM are based on data obtained since the last deepening.

Would the proposed revisions be necessary for the post-construction monitoring and adaptive management? RESPONSE: The EFDC will be used to ensure that changes in riverine salinity that are predicted are not exceeded. The existing M2M and MSM could be used to provide a perspective on what should have been expected in the wetlands with the observed flows if no further deepening occurs.

William Bailey
Physical Scientist

SAVANNAH HARBOR EXPANSION PROJECT

LEAD & COOPERATING AGENCY MEETING

08 MAR 2007

ATTENDEES

Ed EuDaly	USFWS – Charleston	(by phone)
Ted Bisterfeld	EPA Region 4	(by phone)
Kay Davy	NOAA Fisheries - Charleston	(by phone)
Alan Garrett	USACE - Savannah	
Joe Hoke	USACE – Wilmington/Savannah	
Hugh Heine	USACE – Wilmington	(by phone)
Elizabeth Godsey	USACE – Mobile	(by phone)
William Bailey	USACE – Mobile/Savannah	
Hope Moorner	GPA	(by phone)
Larry Keegan	Lockwood-Greene Engineers / GPA	(by phone)
Morgan Rees	Rees Engineering / GPA	(by phone)
Paul Conrads	USGS – Columbia	(by phone)
Ed Roehl	Advanced Data Mining	(by phone)

Estimation of Pore-water Marsh Salinities for Harbor Reconfiguration Scenarios

By

Paul Conrads, U.S. Geological Survey – Water Resources Division
Edwin Roehl, Advanced Data Mining, LLC
Wiley Kitchens, U.S. Geological Survey – Biological Resources Division
Zachariah Welch, Florida Coop Unit, University of Florida,

INTRODUCTION

Under sponsorship from the U.S. Army Corps of Engineers (USCOE) and the Georgia Ports Authority (GPA), the Lower Savannah River Estuary and the surrounding freshwater tidal marshes of the Savannah National Wildlife Refuge (SNWR) have been studied for years by a variety of governmental agencies, water users, universities, and consultants. Their interests are in maintaining water quality and predicting the potential impacts of a proposed harbor deepening on the estuary and tidal wetlands. Two major initiatives were the development of a three-dimensional hydrodynamic model (3DM) by a team of hydrologists, and the development of a marsh succession model (MSM) by a team of plant ecologists. The 3DM predicts changes in riverine water levels and salinity in the system in response to potential harbor changes. The MSM predicts plant distribution in the tidal marshes in response to changes in the water-level and salinity conditions in the marsh. A mechanism for linking riverine and marsh behaviors was needed.

To support 3DM and MSM development, many disparate databases were created that described the natural system's complexity and behaviors, but these databases had not been compiled into a usable form. Variables having particular relevance include those describing bathymetry, meteorology, streamflow (Q), water level (WL), specific conductance (SC), water temperature (WT), and dissolved oxygen concentration (DO). Most of the databases were composed of time series that varied by variable type, periods of record, measurement frequency, location, and reliability. Scientists recognized that data-mining techniques, which include artificial neural networks (ANN), could be used to link riverine and marsh behaviors.

To link the riverine predictions of the 3DM to the MSM, a "model to marsh" (M2M) model was developed by the U.S. Geological Survey and Advanced Data Mining (ADM) using data mining techniques that included ANN models. The ANNs simulated riverine and marsh water levels and salinity in the vicinity of the SNWR for the full range of 11½ years of data from riverine and marsh gaging networks. With M2M, the 3DM and MSM comprise an integrated decision support system for use by various regulatory and scientific stakeholders. The development and application of the M2M is described in Conrads and others (2006).

The M2M has been successfully applied to evaluate the effects of deepening the harbor by generating the inputs to the MSM from the outputs of the 3DM. The M2M also has been used to evaluate potential mitigation scenarios for minimizing the impacts from

harbor deepening. These mitigation scenarios included minor and major changes in channel configuration and flow distribution in the system.

PROBLEM STATEMENT

Eight mitigation scenarios that involve major structural changes in the vicinity of the SNWR, such as the installation of flow diversion structures and the cutting and filling of channels, have been proposed for evaluation. The M2M was not designed to accommodate mitigation scenarios that involve major structural changes. Currently (2007) there is not a mechanism for reliably estimating pore-water salinities in the marsh from riverine inputs for these major mitigation scenarios.

The responses of the SNWR to major changes are very likely to be different from any behaviors ever manifest in the historical record. While the 3DM can be configured to estimate riverine WL and SC with the major changes, it is limited to riverine estimates and cannot be credibly configured to estimate pore-water salinities in the marsh. Using data mining techniques, Conrads and others (2006) found that pore-water salinities integrate riverine WL and salinity variability over several months and often there are long time delays between riverine salinity conditions and marsh pore-water salinity response. A new tool similar to the M2M, hereafter referred to as M2M.2, needs to be developed to estimate pore-water salinity concentrations to evaluate mitigation scenarios involving major structural changes. To provide the necessary technical input and agency review, it is proposed that a multi-agency and multi-disciplinary technical working group be formed of the USGS-S.C. Water Science Center (USGS-SCWSC), the USGS-Florida Coop Unit (USGS-FCU), U.S. Fish and Wildlife Service (USFWS), U.S. Army Corps of Engineers (USACE), and Advanced Data Mining (ADMi).

OBJECTIVES

There are three objectives for this project.

1. *Develop new marsh salinity estimation models* – for estimating pore-water salinities at marsh gaging sites for various mitigation model scenarios, using either measured or predicted river water level and specific conductance data at gage locations. It is possible that algorithms would have to be developed for each mitigation scenario.
2. *Develop new salinity spatial interpolation scheme(s)* – that estimate salinities throughout the SNWR from the USGS marsh gaging sites. The current scheme is embedded in the M2M's two-dimensional visualization and gridding application (2DVG). The new schemes must reflect greater lateral variation in the pore-water salinity than the current scheme. It is possible that new schemes would be created for each mitigation scenario.
3. *Develop M2M.2 2DVG and Simulator Applications* – to deploy the work products from Objectives 1 and 2. This includes adapting the 2DVG and the M2M Simulator, which estimates salinities at the USGS marsh gages.

SCOPE

The scope of this study is to address the relation between the riverine salinity and the pore-water marsh salinity for harbor deepening mitigation scenarios. The study's major tasks are described below.

- Task 1** *Develop Pore-water Estimation Matrix* – that defines the usable permutations of input USGS or GPA river gages to estimate salinities at each marsh gaging station for each mitigation scenario. Consideration will be given to the proximities of gages and flow diversion structures, and the overall quality of input gage measured, forecasted, and hindcasted data used for developing or generated by the M2M.
- Task 2** *Develop predictive models* - for each permutation defined in Task 1. This involves determining optimal time delays and moving window averages between river salinity and pore-water responses through correlation analysis. ANNs provide the best possible correlations in terms of the process information they provide and their prediction accuracy. The number of models to be developed depends on the permutations defined in Task 1.
- Task 3** *Define area of influence and spatial gradient of the USGS marsh gages* - for the new salinity spatial interpolation scheme.
- Task 4** *Develop M2M.2 2DVG application* - to reflect findings from Task 3. It is likely that multiple visualizations and grids will need to be developed to accommodate all of the mitigation scenarios.
- Task 5** *Develop M2M.2 Simulator* – like M2M, it will integrate the 3DM with the MSM using the models from Task 2 and the M2M.2 2DVG application from Task 4, but tailored for the mitigation scenarios involving major structural changes.
- Task 6** *Document the approach and results.*

RELEVANCE AND BENEFITS

An important part of the USGS mission is to provide scientific information for the effective water-resources management of the Nation. To assess the quantity and quality of the Nation's surface-water, the USGS collects hydrologic and water-quality data from rivers, lakes, and estuaries using standardized methods, and maintains the data from these stations in a national database. Often these databases are under utilized and under interpreted for addressing contemporary hydrologic issues. The techniques used to develop the M2M and models of the Cooper River (Conrads and Roehl, 1999), the Beaufort River (Conrads and others, 2003), and the Pee Dee River (Conrads and Roehl, 2006) demonstrate how valuable information can be extracted from existing databases to assist local, state and Federal agencies.

The project benefits the Georgia Ports Authority and the Army Corps of Engineers by providing data analysis needed by water-resource managers to make decisions concerning mitigation of the Savannah River Estuary to accommodate potential deepening of Savannah Harbor. The project builds on previous studies relating river salinity to marsh pore-water response. This is consistent with primary USGS activities that include providing knowledge and expertise to assist various levels of government in understanding and solving critical water-resources problems.

TECHNICAL APPROACH

The historical data do not contain information explicitly about the impacts of the proposed mitigation scenarios involving major structural changes. For these circumstances, the best available data, tools, and human expert knowledge and experience must be brought to the problem. The development and use of the M2M.2, and related findings will provide the best possible resources for evaluating the major mitigation scenarios.

Available Data and Utilities from M2M Study

The M2M is based on river and marsh WL and SC ANN models for the USGS and GPA gaging stations in the river and marshes. These are empirical models and for a system as complex as the Savannah River estuary, it was critical that measured, not estimated, data were used that cover the greatest range of hydrologic and tidal responses. For making predictions of pore-water salinity, the most valuable data for M2M development were from the long-term USGS river and marsh gaging stations, which covered over 11 years and 5 years respectively, and comprise a range of flow conditions from drought to floods. Of lesser value were the GPA river and marsh data, which were limited to short measurement periods and a small range of hydrologic conditions. The USGS river data are the major inputs for the final pore-water salinity models and a few of the GPA stations are used to reduce the error in the pore-water models.

The M2M Simulator and 2DVG applications will be valuable for estimating pore-water salinity for the major mitigation scenarios. The Simulator integrates a collection of individual models of the GPA and USGS river gages with the various field databases, such that all of the WL and SC data from the river gages were individually modeled. By hindcasting and forecasting the short-term data collection periods at the GPA sites, a complete database was generated for the 11½ year period from 1994 to 2005. This feature was incorporated to allow scientists and managers to simulate any period from the last deepening and analyze system responses at any gage location. The 2DVG provides spatial interpolation-extrapolation and visualization of the marsh responses across the marsh wells. It is easily modified to accommodate new pore-water estimates at the USGS marsh sites and new interpolation-extrapolation schemes across the marsh.

Pore-water Estimates for Mitigation Scenarios

The MSM models use the growing-season average pore-water salinity as input. The measured, forecasted, and hindcasted SC records at the GPA river sites can be used in conjunction with the USGS sites to determine the best estimates of the average pore-water salinity during the growing season. Estimates will be based on the assumption that a marsh gage responds to nearby river gage(s) and that the candidate river gage(s) may vary by mitigation scenario. Often good correlations between two time series, such as river and marsh SC, can be obtained by adjusting the time delay and moving window average of the explanatory variable (river SC) to achieve the highest correlation with the response variable (marsh SC). For highly dynamic SNWR, trend information proved invaluable for estimating inertia-driven behaviors. Representing trends requires at least two input variables whose values represent two different times or two different locations at the same time, or both.

To estimate pore-water responses to mitigation scenarios, river sites will be selected as candidate explanatory variables for each mitigation plan. For example, the schematic for Mitigation Plan 5 is shown in figure 1. In this scenario, it is believed that salinity intrusion occurs further up the Front River and that freshwater flows increase down the Little Back River. The riverine gages closest to the Middle River 1 (M1) for estimating its pore-water salinity are GPA12 and GPA12r. For Back River 2 (B2), gages 8979, 89784, and GPA15 appear to be good candidates. Final river site selection will be based on the quality of the measured, hindcasted, and forecasted GPA data.

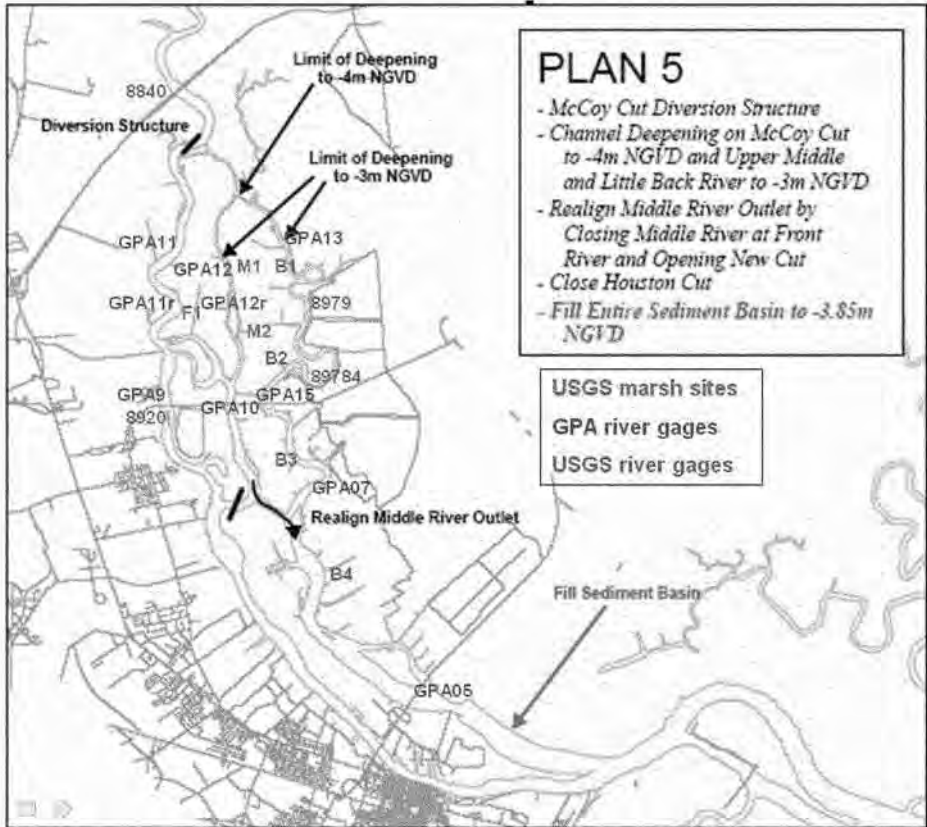


Figure 1. Locations of river and marsh gages and schematic of Plan 5 mitigation scenario

The Pore-water Estimation Matrix will be developed of mitigation plans, marsh gages, and candidate river sites. It is anticipated that some of the plans will share configurations of river gages to marsh gages. Pore-water estimates will be determined for each plan and the estimates will be compared with the predictions made with the original ANN models of the M2M.

Pore-Water Salinity Projections Across the Marsh

The time-series data of the individual marsh gages depict the longitudinal gradient of the system to various hydrologic and tidal conditions. The time-series data do not support the lateral gradients in the system. The M2M's 2DVG is based on estimates of the longitudinal variations from model predictions at the marsh sites. A simple interpolation scheme is used to estimate the lateral gradients.

For the mitigation scenarios, marsh wells will be assigned to the vegetative zones (Q-zones) depicted in Figure 2 and added to the Pore-water Estimation Matrix. Lateral variation across the marsh will be based on field experience and limited data taken during transect studies by the Florida Coop Unit (FCU) at the University of Florida.



Figure 2. Locations of Q-zones in the tidal marsh in the vicinity of the Savannah National Wildlife Refuge

Integration of Hydrodynamic Model and Marsh Succession Models – M2M.2

Like M2M, M2M.2 will integrate output from the 3DM and generate the marsh salinity grid for input to the MSM. Linking the 3DM is accomplished by reading in a file of simulated differences in SC values for the river for the mitigation plan scenarios. The use of differences, or deltas, from the 3DM increases the prediction accuracy of the model. Mechanistic model, such as the 3DM, typically are better suited from predicting relative differences between two conditions rather than making absolute predictions for one

scenario. The differences (deltas) from the 3DM are added to the historical time series for the scenario and then used in the M2M.2. The application estimates pore-water salinity at the marsh gages and the salinity grid is generated for input to the MSM applications.

Figure 3 describes the data and workflow from the 3DM, through the M2M.2 Simulator and 2DVG applications, and to the MSM. Here, the eight mitigation scenarios are handled separately, providing each with completely customized solution bearing the best ideas of the multi-disciplinary team. At left the 3DM is run for each scenario and separate output files are generated. Next at top center, in the M2M.2 Simulator the user selects the scenario to be run, the appropriate 3DM output file is loaded, the appropriate prediction models are engaged, a simulation is run, and an output file of marsh specific conductivities is generated. Next at right, in the M2M.2 2DVG the user selects the scenario to be run, the M2M.2 Simulator output file is loaded, and an output file of spatially interpolated marsh salinities is generated, which can be loaded into the MSM.

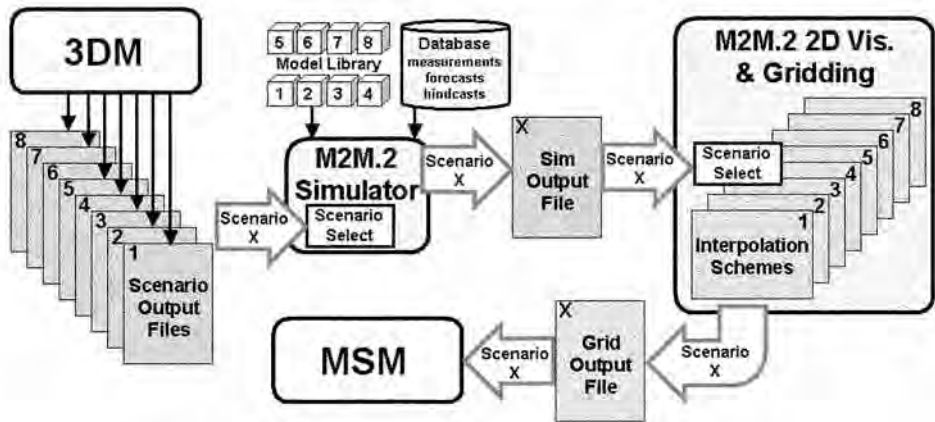


Figure 3. Schematic of data and workflow through the M2M.2.

UNCERTAINTY OF OUTCOME

In this technical approach, each scenario will have a custom solution developed by a multi-disciplinary technical team composed of the USGS-SCWSC, the USGS-FCU, the USFWS, USACOE, and ADMi personnel that are most knowledgeable in the issues, history, and science of the harbor deepening. As with the M2M, the behaviors and predictive performance of the new “local” models of the M2M.2 will be fully described to the technical team. The performance of the models is expected to be comparable to those of the M2M, with the major sources of uncertainty to be associated with the quality of the data collected from the GPA sites, the quality of the SC hindcasts and forecasts at the GPA sites, and the accuracy of the 3DM predictions.

Generally, the 3DM prediction accuracy of flow and salinity throughout the model domain are better on the Front River and lower portion of the system. The prediction

accuracy is not as good in the vicinity of the SNWF and farther inland in the system. This can be seen in the summary statistic of the model performance for the 50 percentile and the coefficient of determination for the 1999 calibration data and the 1997 validation data set (Tetra Tech, 2006). The accuracy of estimates made by the 3DM for scenarios involving major structural changes is unknowable *a priori*, but very likely to be less accurate than the calibration and validation prediction. The use of differences from the 3DM will reduce absolute prediction error by the model. The 3DM's performance will be the primary source of uncertainty, but significant reliance on its estimates inside the SNWR is unavoidable.

The technical team will leverage the tools in hand to formulate a process of mitigating deepening-related problems. The process may employ a succession of structural changes of varying impact severity. It is likely that each change will have surprising results that can only be determined *post priori* by continued field monitoring and data analysis. This suggests a conservative, iterative mitigation approach composed of these steps - hypothesize, change, test, review, and most importantly, learn will be required.

PROJECT COORDINATION

In making estimates of system responses to the structural changes in the SNWR, it is essential that the appropriate technical resources from the agencies be involved. It is proposed that periodic meetings of the technical working group (USCOE, USF&W, USGS-SCWSC, USGS-FCU, and ADMI) be scheduled to review interim products such as the pore-water estimation matrix, pore-water estimation models, and prototypes of the M2M.2 2DVG and M2M.2. Many of these meetings could be accomplished by teleconferencing.

REPORTING

The project will be documented in a USGS Open-File Report, tentatively titled "Estimation of Tidal Marsh Pore-water Salinity in the Vicinity of Savannah National Wildlife Refuge for Savannah Harbor Deepening Mitigation, Coastal South Carolina and Georgia." A provisional copy of the report will be available for colleague/cooperator review 3 months after the completion of the project. The review process will require an additional 5 months. A limited number of paper copies of the report will be provided to the cooperating agencies; however, the primary outlet for the publication will be the Internet. A link to the report will be posted on the USGS South Carolina Water Science Center web sites.

BUDGET AND SCHEDULE

The Project will be collaboration between the USGS-SCWSC, the USGS-FCU, and ADMI. The project will take approximately 4-5 months to complete the technical analysis and develop the provisional M2M.2 from the start date. The final documentation of the project will be complete approximately 10-12 months from the start date. The total cost of the project will be \$110,750. An itemized description of the tasks and required hours

are listed in Table 1 and a timeline for completion of the project from initiation is presented in Table 2.

Table 1. Tasks, description, notes, hours, and costs.

Task #	Description	Notes	USGS-SCWSC Hours	USGS-SCWSC Cost	USGS-FCU Hours	USGS-FCU Cost	ADMI Hours	ADMI Cost
1	Develop Pore-water Estimation Matrix	tooling up, evaluate data quality, matrix development, meeting with Agencies to finalize matrix	40	\$4,400			40	\$5,000
2	Develop predictive models	upper limit = 8 scenarios x 7 models per = 56 models, x 8hrs/model, use 50% - USGS-SCWSC to review	25	\$2,750			224	\$28,000
3	Define area of influence and spatial gradient of the USGS marsh gages	mostly USGS-FCU with assistance from USGS-SCWSC, ADMI to assimilate, meeting for concurrence with Agencies prior to finalization	40	\$4,400	64	\$6,400	12	\$1,500
4	Develop M2M 2 2DVG application	assume 8 interp schemes to program/integrate at 2days per - USGS-SCWSC to review	25	\$2,750			128	\$16,000
5	Develop M2M 2 Simulator	assume 4 weeks for mostly new but derivative app programming and testing - USGS-SCWSC to rev	25	\$2,750			160	\$20,000
6	Document the approach and results	mostly USGS-SCWSC and USGS-Publications Unit, ADMI and USGS-FCU to assist	120	\$13,200	16	\$1,600	16	\$2,000
Totals			275	\$30,250	80	\$8,000	580	\$72,500

Table 2. Timeline for completion of project.

Task#	Description	Month 1	Month 2	Month 3	Month 4	Month 5	Month 6	Month 7	Month 8	Month 9	Month 10	Month 11	Month 12
1	Develop Pore-water Estimation Matrix	■											
2	Develop predictive models	■	■										
3	Define area of influence and spatial gradient of the USGS marsh gages	■	■	■									
4	Develop M2M 2 2DVG application		■	■	■								
5	Develop M2M 2 Simulator			■	■	■							
6a	Document the approach and results				■	■	■	■	■	■	■	■	■
6b	USGS report review and publication												
	Interim product-Estimation Matrix												
	Interim product - Spatial gradient interpolation-extrapolation routine												
	Interim product - Prototype of M2M 2 w/ 2DVG												
	Interim product - Provisional M2M 2 available												
	Interim product - Draft report												

REFERENCES

- Conrads, P.A. and E.A. Roehl, 1999, Comparing physics-based and neural network models for predicting salinity, water temperature, and dissolved oxygen concentration in a complex tidally affected river basin, South Carolina Environmental Conference, Myrtle Beach, March 1999.
- Conrads, P.A., Roehl, E.A., and W.P. Martello, 2003, Development of an empirical model of a complex, tidally affected river using artificial neural networks, Water Environment Federation TMDL Specialty Conference, Chicago, Illinois, November 2003.
- Conrads, P.A., Roehl, E.A., Daamen, R.C., and W.M. Kitchens, 2006, Simulation of water levels and salinity in the rivers and tidal marshes in the vicinity of the Savannah National Wildlife Refuge, Coastal South Carolina and Georgia, U.S. Geological Survey Scientific Investigations Report 2006-5187.
- Conrads, P.A. and Roehl, E.A., 2006, An artificial neural network-based decision support system to evaluate hydropower releases on salinity intrusion, *Hydroinformatics 2006*, edited by Philippe Gourbesville, Jean Cunge, Vincent Guinot, Shie-Yui Liong, Vol. 4, p. 2765-2772.
- Tetra Tech, 2006, Development of the hydrodynamic and water quality models for the Savannah Harbor Expansion Project. Prepared for the U.S. Army Corps of Engineers – Savannah District, Tetra Tech, Inc. Atlanta, Georgia.

From: Bailey, William G SAM@SAS
To: "Wade Cantrell"; "beckhair@dhc.sc.gov"; "wendto@dnr.sc.gov"; "Bob Perry"; "Kelle Moore";
 "Brad_Gane@dnr.state.ga.us"; "Keith_Parsons@mail.dnr.state.ga.us"; "Dele Caldwell";
 "bisterfeldt@epa.gov"; "Bob Lord (Lord.Bob@epa.gov)"; "kay.davy@noaa.gov"; "peconsulting@comcast.net";
 "Bill Wikoff"
Cc: "Ed Duncan"; "hmoorer@qaports.com"; "Chuck_Hayes@fws.gov"; "Jane_griess@fws.gov";
 "Jeff_Larson@dnr.state.ga.us"; "Tim Barrett"; "joynercm@dhc.sc.gov"; Okane, Jason D SAS; Bradley, Kenneth
 P SAM; Heine, Hugh SAW; Small, Daniel L SAD; "Pace Wilber"; "David Bernhart"; "Mueller, Heinz J."
Subject: Savannah Harbor Expansion Project: Wetlands Interagency Coordination Team
Date: Tuesday, July 21, 2009 8:15:21 AM
Attachments: savannah_ACOE_Onslow_Area1S_mitigation_additional_acres.pdf

Last January I let you know that we had identified a previous sediment disposal site in Savannah Harbor (Area 1S) to grade down to provide in-kind mitigation for project impacts to saltmarsh. If you remember, the site is located along the Savannah River, where it is joined by Middle River. During subsequent discussions, folks suggested a site visit to jointly inspect the site.

The CESAS Regulatory Division will be having a Quarterly Interagency Meeting in Savannah on 11 August. Some of you will be coming to attend. Would those who are interested, be available to visit Area 1S the afternoon before -- 10 August? The Corps would provide a boat to get to the site.

The USFWS visited the site and provided the attached figure of the portions of the site to restore.

If you want to see the site, please let me know by COB next Monday if you could come the afternoon of 10 August to visit it. If you want to see it, but are not available that day, please let me know.

When we meet, we'll also review the overall approaches we have taken on this project to identify and quantify wetland impacts and subsequent mitigation.

Bill Bailey



From: Bailey, William G SAS
To: "beckhaic@dhc.sc.gov"; "Blair N. Williams"; "Kelie Moore"; "Dale Caldwell";
 "Keith.Parsons@mail.dnr.state.ga.us"; "Bob Lord (Lord.Bob@epa.gov)"; "Mueljer, Heinz J."; "Bill Wikoff";
 "wendto@dnr.sc.gov"; "Bob Perry"; "kay.davy@noaa.gov"
Cc: "Wade Cantrell"; "Chuck Hayes@fws.gov"; "hmoorer@naports.com"; "Jeff.Larson@dnr.state.ga.us";
 "Brad.Gane@dnr.state.ga.us"; "Tim Barrett"; Okane, Jason D SAS; Bradley, Kenneth P SAM; McIntosh,
 Margaret (Mackie) SAS; King, Jeffrey K. SAS; Small, Daniel L SAD; Lampley, Vechere V SAD; "Pete Wilber";
 "David Bernhart"; "Jack Arnold@fws.gov"; "Mark Musaus@fws.gov"; "Sandy Tucker@fws.gov";
 "Jane.Griess@fws.gov"; "Gaetano.Paul@epamail.epa.gov"; "Godfrey Annie@epamail.epa.gov";
 "Derby.Jennifer@epamail.epa.gov"; "Melville.William@epamail.epa.gov"; "Marcus-
 Unoaro.Philip@epamail.epa.gov"; "Gregory.Hoque@ios.doi.gov"; "Joyce.Stanley@ios.doi.gov"; "Rheta.Geddings
 DiNovo"; "Barbara Neale"; "Heather Preston"
Subject: Savannah Harbor Expansion Project: Wetlands Interagency Coordination Team meeting (UNCLASSIFIED)
Date: Friday, June 03, 2011 3:06:38 PM
Attachments: 2011-06-01 SHEP Wetland Presentation.pdf

Classification: UNCLASSIFIED
 Caveats: NONE

I've attached the presentation we gave at this Wednesday's meeting and the sign-in sheet.

Thank you all for attending.


We are adding some of the figures that had in the presentation to our write-up for the FEIS. We expect to complete that and send it out to you by the end of next week.

Bill Bailey
 Chief, Planning Division

Classification: UNCLASSIFIED
 Caveats: NONE

Savannah Harbor Expansion Project (SHEP) – Information Meeting Wetland Impacts and Mitigation

Bill Bailey and Jeffrey King
US Army Corps of Engineers,
Savannah District
Atlanta, Georgia
June 1, 2011



US Army Corps of Engineers
BUILDING STRONG



Outline

- Provide agencies with history of Wetland Interagency Coordination Team (ICT) discussions and recommendations concerning wetland impact evaluation and mitigation
- Review direct impacts to wetlands
- Review mitigation for direct impacts to wetlands
- Review indirect impacts to wetlands
- Review mitigation for indirect impacts to wetlands



BUILDING STRONG®

History of Wetland Interagency Coordination Team

- EPA, USFWS, NMFS, GA DNR-EPD,
GA DNR-CRD, SC DNR, and SC DHEC
- Previous meetings
 - ▶ 01 July 2003
 - ▶ 31 May 2006
 - ▶ 15 Dec 2006
 - ▶ 20/21 June 2007
- Site visit to Disposal Area 1S on
10 August 2009



BUILDING STRONG®

Guidance Provided By Wetland Interagency Coordination Team

- 01 July 2003 Meeting
 - ▶ Freshwater vegetative communities are more valuable in the Savannah River estuarine ecosystem
 - ▶ USFWS favors a community-based approach to assessing impacts to tidal wetlands
 - ▶ Possibly need a sensitivity analysis of alternate river flows



BUILDING STRONG®

Guidance Provided By Wetland Interagency Coordination Team

- 31 May 2006 Meeting
 - ▶ Would use hydrodynamic model to identify changes in salinity
 - ▶ Would use Marsh Succession Model to identify changes in vegetation/community resulting from salinity changes
 - ▶ Would develop multiple methods of identifying changes in vegetation
 - Movement of 0.5 ppt contour
 - Would use ATM Marsh Succession Model
 - Would use USFWS/USGS Marsh Succession Model



BUILDING STRONG®

Guidance Provided By Wetland Interagency Coordination Team

- **31 May 2006 Meeting (continued)**
 - ▶ Conduct basic analysis using average river flows (1997)
 - ▶ Conduct drought sensitivity analysis using 2001 flows
 - ▶ Conduct sensitivity analysis on sea level rise
 - 25 and 50 cm over 50 years
 - ▶ Evaluate impacts over a 1 Mar – 30 Oct growing season
 - ▶ Evaluate sea level rise and drought (combined) on recommended plan



BUILDING STRONG®

Guidance Provided By Wetland Interagency Coordination Team

- **31 May 2006 Meeting (continued)**
 - ▶ Corps should provide salinity values predicted in root zone from Model-To-Marsh
 - ▶ Corps should provide changes in root zone salinity from Model-To-Marsh
 - ▶ USFWS maintains that freshwater tidal wetlands in Middle and Back Rivers are most ecologically valuable areas within the lower estuary
 - ▶ Areas along navigation channel have considerably less ecological value
 - ▶ USFWS reiterated that it can accept no further loss of tidal freshwater marsh



Guidance Provided By Wetland Interagency Coordination Team

- **31 May 2006 Meeting (continued)**
 - ▶ Corps should evaluate acquiring Harrison property adjacent to SNWR as mitigation
 - ▶ Present surface, middle and bottom salinities
 - ▶ Use surface salinity for wetland evaluation because that is what floods the marshes
 - ▶ Display locations where the surface salinity would change
 - ▶ Provide acreage and % change for each vegetative type



BUILDING STRONG®

Guidance Provided By Wetland Interagency Coordination Team

- 15 Dec 2006 Meeting
 - ▶ Evaluate not dredging the upper portions of Middle and Back Rivers
 - ▶ Evaluate blocking original mouth of McCoys Cut
 - ▶ Evaluate rerouting Middle River through Rifle Cut



BUILDING STRONG®

Guidance Provided By Wetland Interagency Coordination Team

- 20/21 June 2007 Meeting
 - ▶ Use 50%-tile exceedence surface salinity values for wetland evaluations
 - ▶ Reaffirmed basic analysis should use average river flows
 - ▶ Manually extending salinity contours across the marsh is an acceptable procedure
 - ▶ Provide information on acreage of 5 salinity categories (<0.5; 0.5-1.0; 1-2; 2-4; >4 ppt)



Guidance Provided By Wetland Interagency Coordination Team

- 20/21 June 2007 Meeting (continued)
 - ▶ Drop consideration of flow rerouting plans 4, 5 and 8 because they decrease flooding of marshes
 - ▶ Evaluate flow rerouting plans 6 and 7, using 3 as a base
 - ▶ USFWS would not consider any out-of-kind replacement for loss of tidal freshwater wetlands




Guidance Provided By Wetland Interagency Coordination Team

- 20/21 June 2007 Meeting (continued)
 - ▶ All tidal freshwater marshes within the Refuge possess the same ecological value
 - ▶ USFWS preferred leaving slough at lower arm of McCoys Cut for fishing rather than filling to create tidal freshwater wetlands
 - ▶ Constructing an earthen sill at the lower end of the Sediment Basin could create water quality impacts, depending on material used and construction technique
 - ▶ Add "Restore wetlands at Disposal Area 1S" to list of potential mitigation features
 - ▶ Corps will consider grading down high ground to produce tidal freshwater wetlands



BUILDING STRONG®

**Interagency Site Visit
Disposal Area 1S
10 August 09**

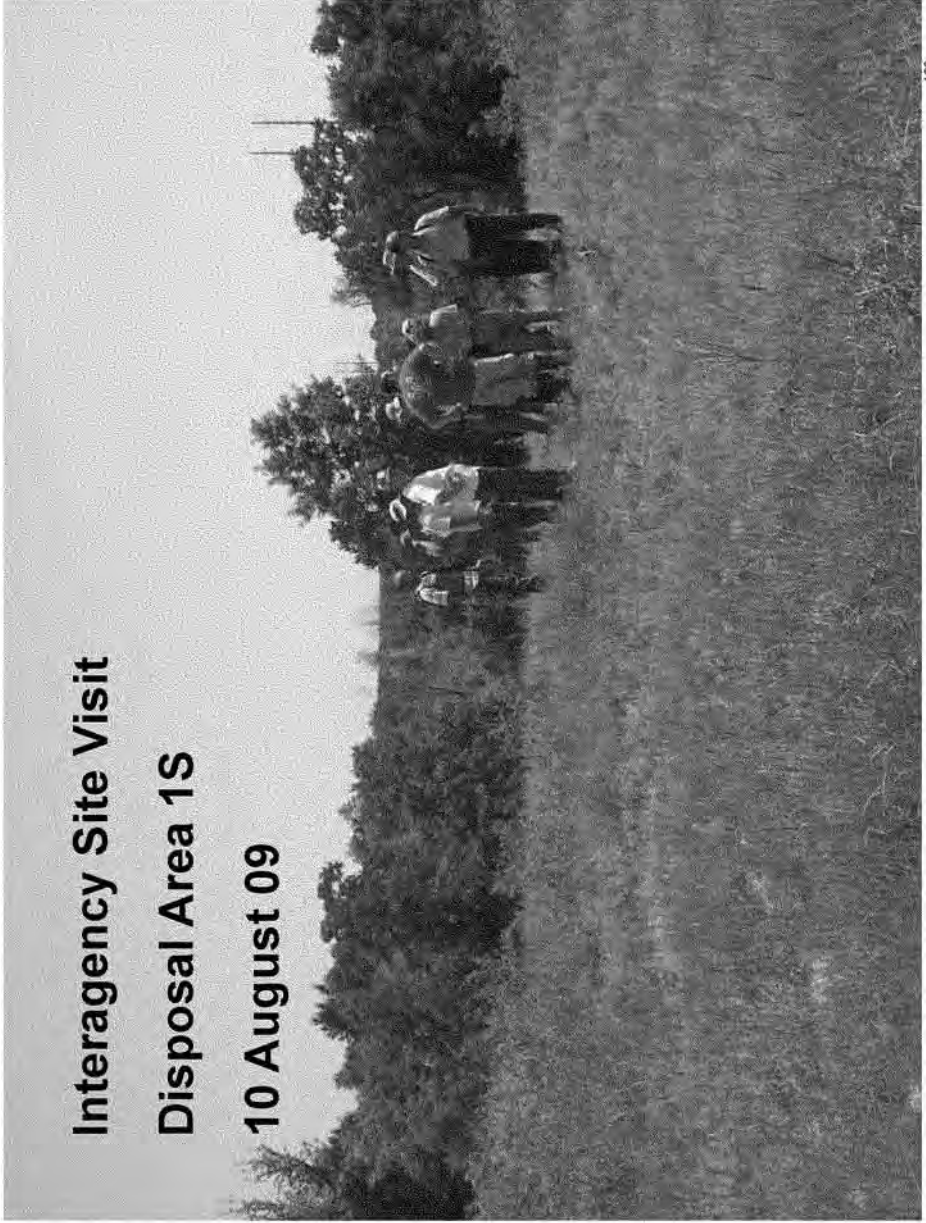



Wetland Impacts



BUILDING STRONG®

Wetland Impacts Associated with SHEP

- DEIS Evaluated several alternative depths
- For simplicity, discussions on wetland impacts will use 48-foot depth alternative
 - Direct Impacts: 15.68 acres salt marsh
 - Indirect Impacts:
 - 337 acres of tidal freshwater conversion
 - +1067 acres of brackish marsh conversion
 - 730 acres of salt marsh conversion



Final Compensatory Mitigation Rule and Wetland Impacts

- Functional assessment of impact sites and mitigation areas
- Watershed approach (considerations, information, site selection)
- Type and location of mitigation
- Responsible parties
- Timing
- Ecological Performance Standards
- Monitoring
- Adaptive Management
- Long term Management
- Financial Assurances and Protection



Direct Impacts to Wetlands



BUILDING STRONG®


Direct Impacts to Wetlands

Location (Channel Station)	Wetland Acres Affected by Excavation
Refuge Lands	
102+600 - GA	2.2
Kings Island Turning Basin- GA	0.8
Non-Refuge Lands	
88+000 - GA	3.4
70+000 - GA	0.8
Tidegate - GA	7.63
Tidegate - SC	0.85
Total	15.68



BUILDING STRONG®

Location of Direct Impacts to Wetlands

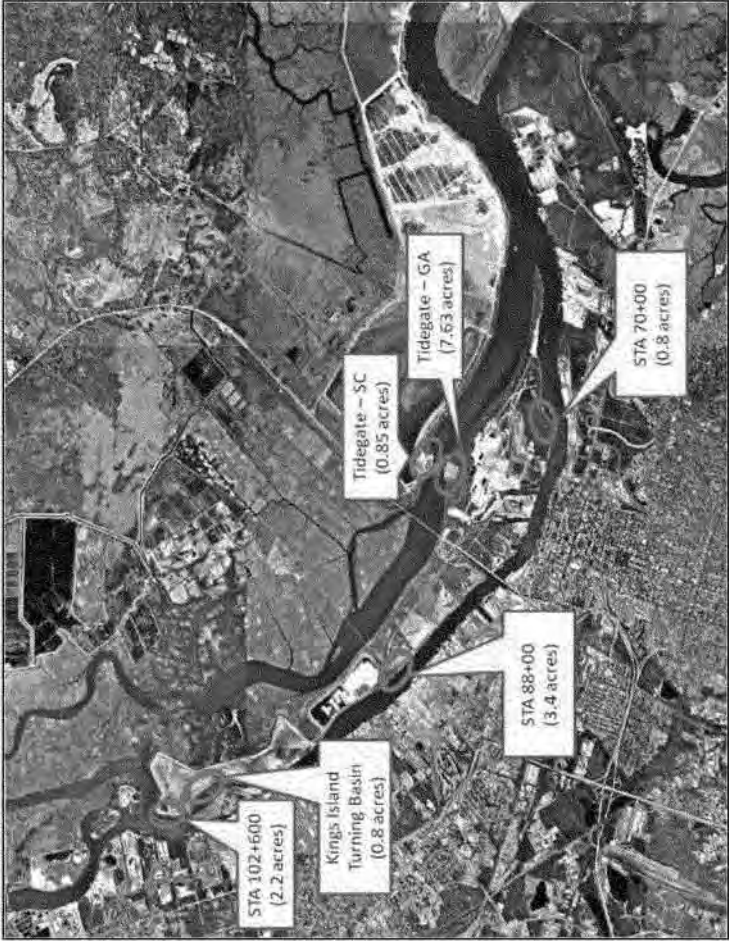

BUILDING STRONG®

Tidegate (SC) Impacts = 0.85 acres




BUILDING STRONG®


Tidegate (GA) Impacts = 7.63 acres




STA 70+000 Impacts = 0.8 acres

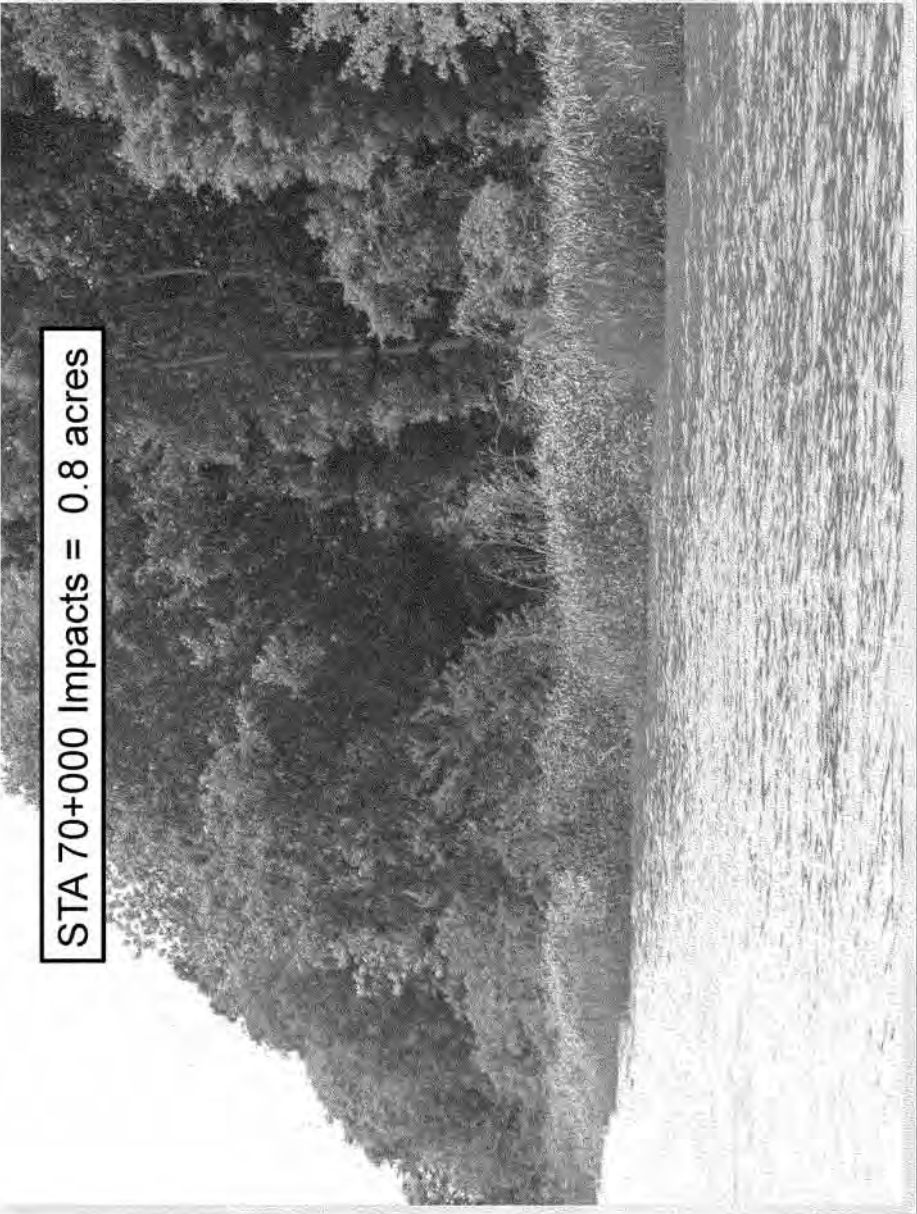

Location of Direct Impacts to Wetlands

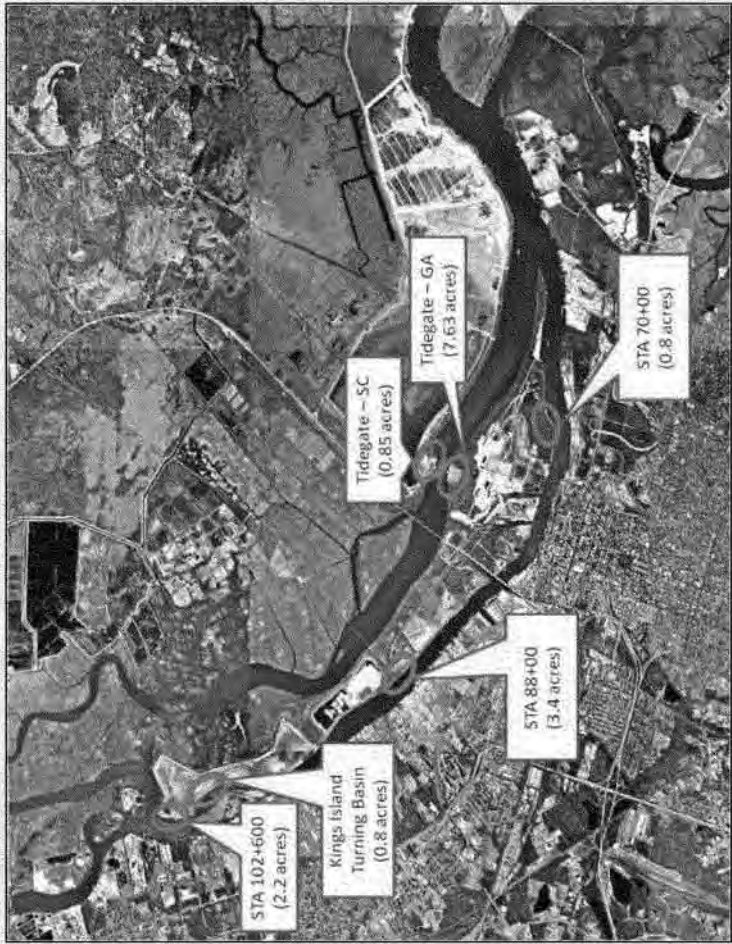


BUILDING STRONG®

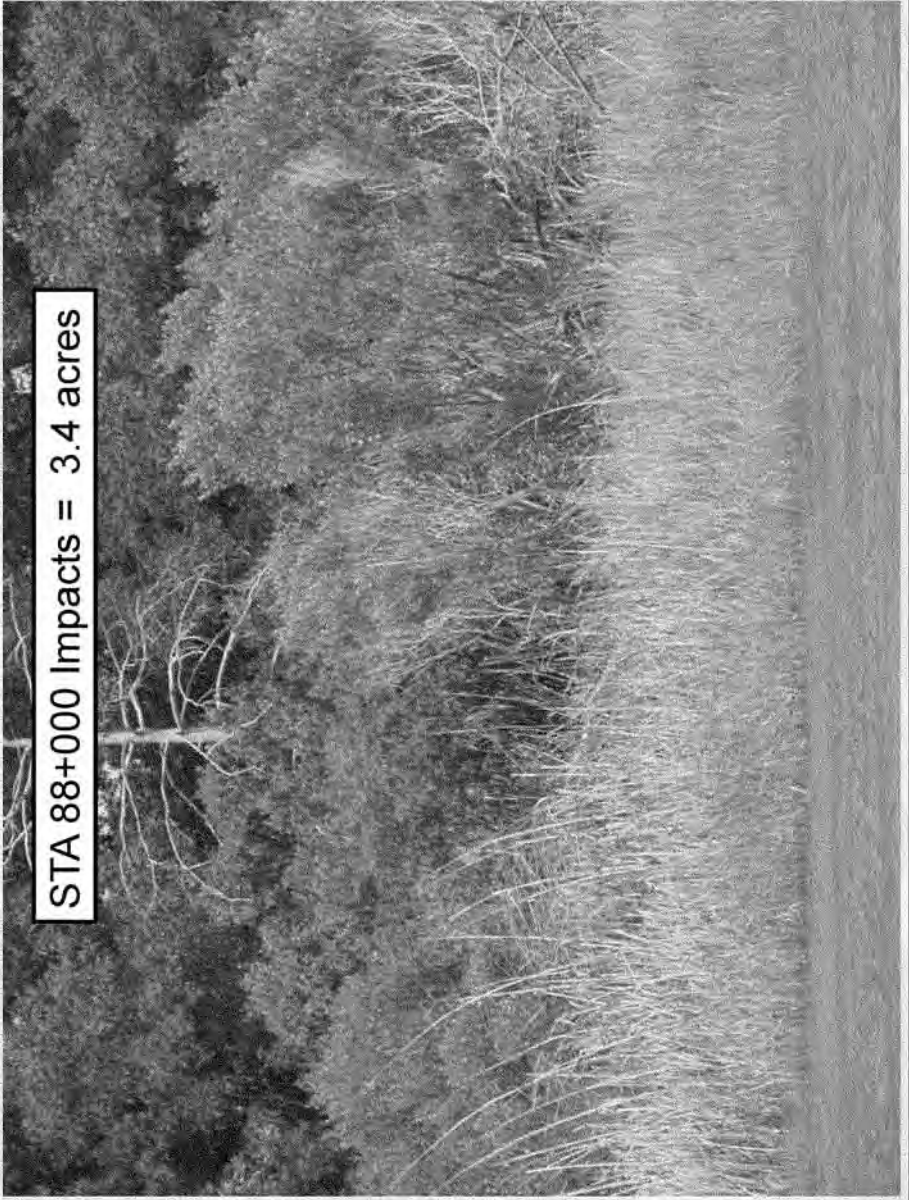


STA 88+000 Impacts = 3.4 acres



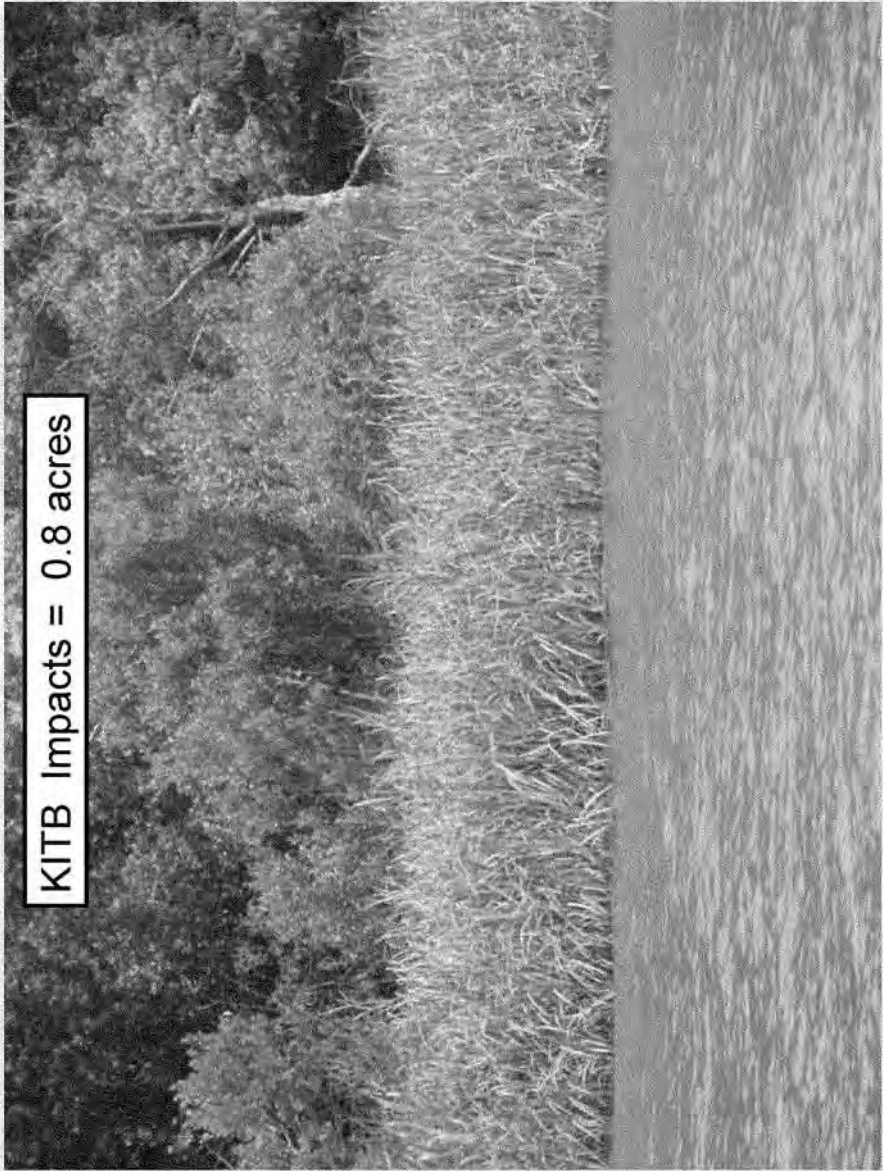

STA 102+000 Impacts = 2.2 acres

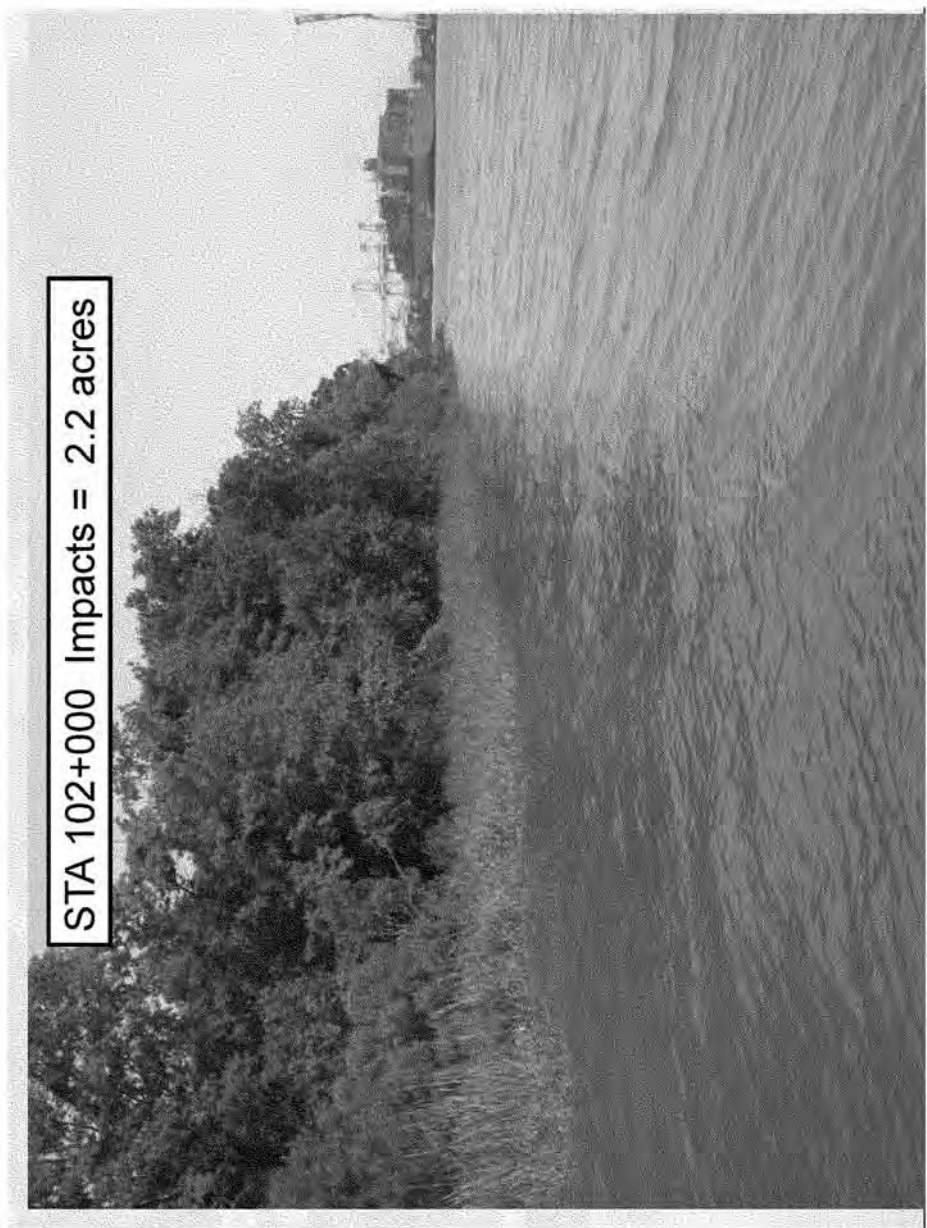

Changes in Wetland Function as a Result of Brackish Marsh Excavation

Elements of Wetland Function	Effect of Excavation on Wetland Function (15.68 acres)
Water Purification	Major Adverse (lost)
Flood Protection	Major Adverse (lost)
Shoreline Stabilization	Major Adverse (lost)
Groundwater Recharge	Major Adverse (lost)
Streamflow Maintenance	Major Adverse (lost)
Retention of Particles	Major Adverse (lost)
Surface Water Storage	Major Adverse (lost)
Subsurface Storage	Major Adverse (lost)
Nutrient Cycling	Major Adverse (lost)
Values to Society	Major Adverse (lost)
Fish and Wildlife Habitat	Major Adverse (lost)



BUILDING STRONG®

Mitigation for Direct Impacts

- Conducted watershed assessment
- Evaluated use of mitigation banks

Bank Name	Watershed	Acres of Bank*	Status	USACE District
Salt Creek	Ogeechee-Coastal	98.9	Pending	Savannah
Tronox	Lower Savannah	88	Pending	Savannah
Vallambrosa	Ogeechee-Coastal	1,513	Pending	Savannah
Clydesdale Club	Lower Savannah	693	Pending	Charleston

* Acres reflects total size of bank and may include additional habitat other than saltmarsh.



- Reviewed possible in-lieu fee option

BUILDING STRONG®

Mitigation for Direct Impacts

- “In Kind / In Basin” Restoration Opportunity



BUILDING STRONG®

Marsh Adjacent to DA 1S



Amount of Compensatory Mitigation

- ICT participation and use of Savannah District SOP
- Restoration of 28.75 acres for the 15.68 acres of impact (1.8 to 1 mitigation ratio)
- Mitigation ratio consistent with RD requirements
- Restoration would encompass 1.7 acre marsh site previously restored by GPA
- Remaining 11.55 acres would be used for future harbor improvements and/or adaptive management



Example Regulatory Division Authorized Projects

Project Name	USACE File Number	Brackish Marsh Impacts (Acres)	Brackish Marsh Creation (Acres)	Mitigation Ratio (mitigation: Impact)
Slip One- Hutchinson Island	200501453	0.28	0.56	2:1
Hardin Canal Drainage	200600393	0.27	0.54	2:1
Skidaway Narrows Emergency Access	200600909	0.56	0.56	1:1
Skidaway Road Drainage Improvements	200601249	0.52	0.75	1.4:1
SLNG-Slip Construction	200200640	3.24	7.5	2.3:1



BUILDING STRONG®

Site Selection for “In Kind / In Basin” Restoration

- USFWS required “In Basin” mitigation for impacts
- Site located in close proximity to impacts
- Previously existed as brackish marsh with continuity to adjacent marsh
- One large contiguous marsh vs. multiple sites
- Site in area of Lower Savannah River Watershed that supports a brackish marsh ecosystem
- Site is upriver of major Port of Savannah activities
- Located within designated boundaries of SNWR (compatible with adjacent land use)



Responsible Parties and Timing

- Savannah District will be responsible for implementation, performance, and long-term management of the brackish marsh site.
- The Wetland ICT (USEPA, USFWS, NOAA, GADNR-CRD, SCDNR, SCDHEC-OCRM) will receive annual reports on the status of the mitigation project. Also, Savannah District will work with ICT to implement any Adaptive Management plans.
- Savannah District has committed to construction of the restored marsh concurrently with dredging in the Inner Harbor.



BUILDING STRONG®

Ecological Performance Standards

- Developed so that mitigation project can be objectively evaluated to determine if it is developing into the desired resource type.
- Grade down Disposal Area 1S; allow *in situ* Spartina seed stock to vegetate site.
- Successful restoration will be determined based on following table.

Revegetation Rate for Restored Marsh	
Time Period	Percent Vegetative Cover
Construction	0
Year 1	15
Year 2	25
Year 3	40
Year 4	60
Year 5	80



BUILDING STRONG®

Monitoring Restored Marsh Site

- Restored Marsh will be monitored for a period of five years.
- Ten, 30-foot transects established on site and one in adjacent reference marsh; Vegetative counts and density measurements.
- Success based on meeting or exceeding the percent vegetative cover on previous slide.
- ICT will be provided with annual reports documenting the success of the restored marsh site.



BUILDING STRONG®

Site Protection

- Corps and GDOT will relinquish sediment disposal easement on Disposal Area 1S.
- Restored brackish marsh ecosystem will be permanently protected through the State of Georgia's Coastal Marshlands Protection Act.
- Restored marsh is within boundaries of SNWR. Thus, permanently integrated into SNWR's conservation and management plan.



BUILDING STRONG®

Adaptive Management

- Site inspected twice annually. If it does not naturally revegetate as indicated in performance standards, then site will be planted with *Spartina*.
- If invasive species are identified, then they will be removed from the site.
- If percent colonization not achieved, site would be sprigged or then purchase salt marsh mitigation credits from approved bank.
- Wetland ICT will be provided annual monitoring reports and consulted annually to provide input and recommendations.



Long Term Management

- Plan includes description of long-term needs, annual cost estimates and management responsibility.
- After revegetation, brackish marsh would be self-sustaining.
- Restoration area already within boundaries of SNWR and contiguous with existing marsh. As such, restored site would be managed by USFWS and integrated into the same long-term management plan that currently protects the SNWR as defined in the National Wildlife Refuge System Improvement Act of 1997.



Indirect Impacts to Wetlands



BUILDING STRONG®

Model Used to Evaluate Vegetative Shifts Associated Changes in Salinity

- **EFDC Model used to determine changes in salinity and associated influence over marsh areas**
 - **0.0 – 0.5 ppt Tidal Freshwater Wetland**
 - **> 0.5 – 4 ppt Brackish Marsh**
 - **> 4 ppt Salt Marsh**
- **Model Used to Analyze all Depth Alternatives**
- **Use 48' Depth Alternative as Example**



Indirect Impacts Without Flow Diversion

Wetland Type	48-Foot Depth (Wetland Conversion)
Freshwater Wetlands (< 0.5 ppt salinity)	1,212 acres
Salt Marsh (> 4 ppt salinity)	0 acres



BUILDING STRONG®

Salinity: Existing Conditions and Post-Deepening




Lines indicate limits of 0.5 ppt salinity



BUILDING STRONG®

Flow Diversion Plan 6A

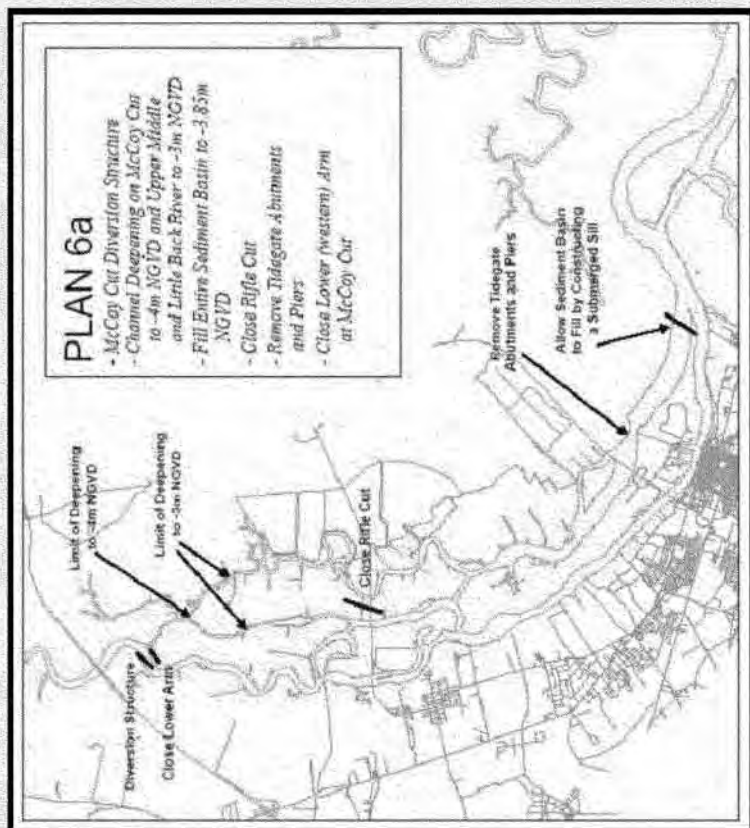

BUILDING STRONG®


Indirect Impacts With Flow Diversion 6A

Wetland Type	48-Foot Depth (Wetland Conversion)
Freshwater Wetlands (< 0.5 ppt salinity)	337 acres
Salt Marsh (> 4 ppt salinity)	730 acres




BUILDING STRONG®

Salinity: Existing Conditions and
Post- Deepening with Flow Diversion
Plan 6A

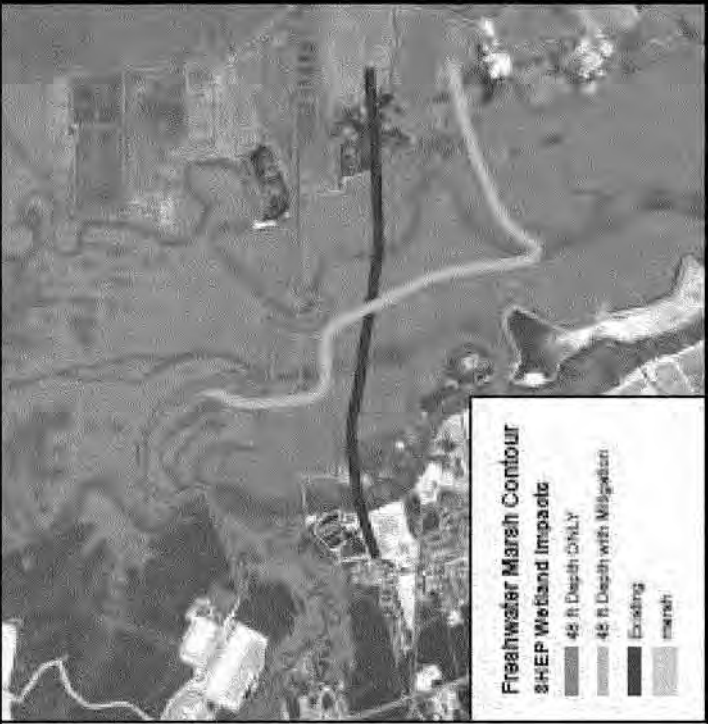


BUILDING STRONG®

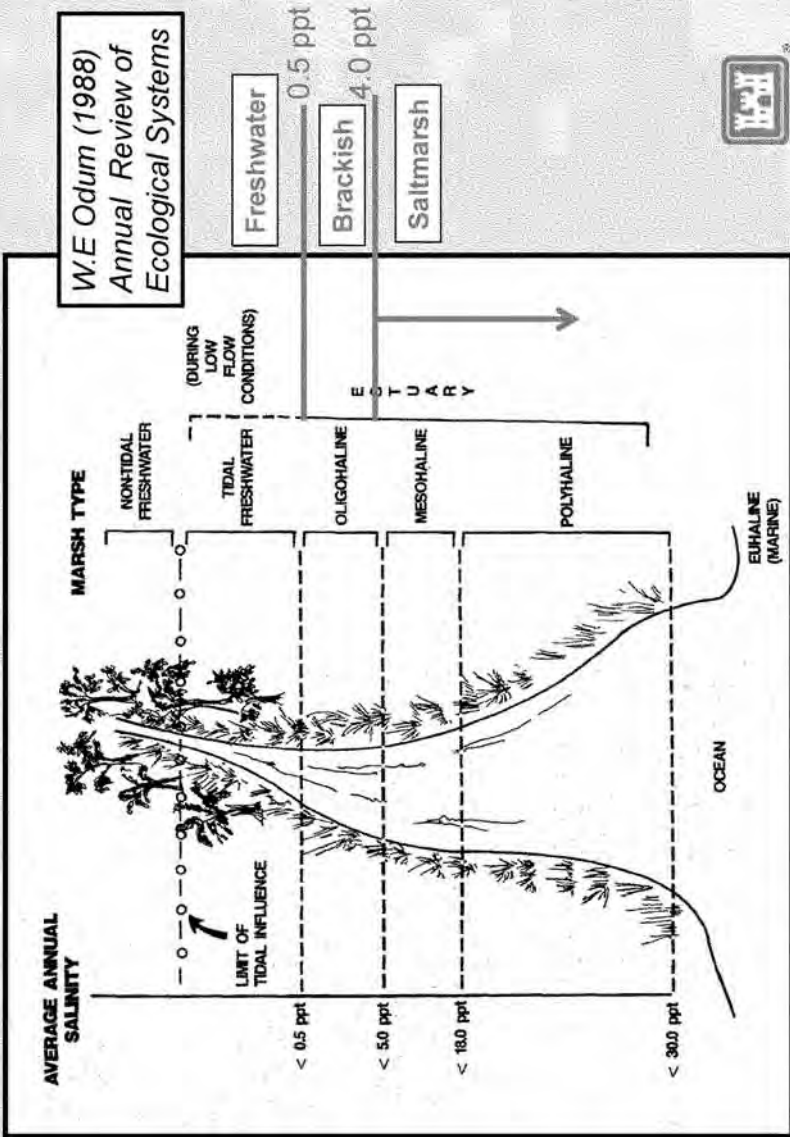

**Existing 42 ft Depth
No Deepening, No Mitigation**



**48 ft Depth
6 ft Deepening, Flow Diversion 6A**

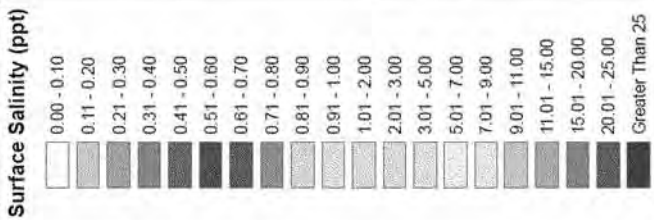


BUILDING STRONG®

Change in Salinity Following Harbor Deepening



48 ft Channel Depth
6 ft Deepening, Mitigation 6A

Surface Salinity Difference (ppt)



Negative values indicate a reduction
in river salinity.



BUILDING STRONG®

Comparison of Physical Characteristics in Tidal Freshwater Marsh and Salt Marsh

Table 1 Comparison of physical characteristics between tidal freshwater marshes and salt marshes

	Tidal freshwater marsh	Salt marsh
Location	Head of the estuary (above the oligohaline zone)	Mid and lower estuary
Geographical distribution	Worldwide, usually associated with rivers	Worldwide, not always associated with rivers
Salinity	Annual average below 0.5 ppt	Annual average between 18.0 and 35.0 ppt
Tidal range	Ocean-derived lunar tide, often greater amplitude than nearby salt marshes	Ocean-derived lunar tide
Sediments	Silt-clay, high organic content, low-moderate root and peat content	More sand, lower organic content, higher peat and root content
Sediment erodability	High erodability (particularly in the low marsh)	Generally lower erodability
Streambank morphology	Low gradient, little undercutting	Steeper gradient, more undercutting
Stream channel morphology	Low sinuosity	Moderate to high sinuosity
Dissolved sulfur	Trace (approximately 1 ppm)	Very high (approximately 2500 ppm)
Sediment redox potential	Moderate to strongly reducing (multiple redox pairs)	Strongly reducing (sulfur redox pairs most important)
Reduced iron-sulfur compounds	Rare or absent	Plentiful
Dissolved and particulate organic carbon	High concentrations	Moderate to low concentrations

W.E Odum (1988)
Annual Review of
Ecological Systems



BUILDING STRONG®

Percent of Vegetation Correctly Classified by Environmental Variables

Latham et. al. Wetlands 1994

Table 2. Discriminant analysis results of vegetation classes from freshwater, oligohaline, strongly oligohaline, and mesohaline sites on the lower Savannah River. Wilk's-Lambda = 0.18; F = 1743.28; DF = 3/1144; P = 0.0001.

A. Classification matrix.

	Class	Percent Cases Correctly Classified by Site		
		Fresh	Oligo-haline	Strongly Meso-haline
0.54 ppt +/- 0.63	Fresh	87	13	0
2.10 ppt +/- 1.04	Oligohaline	37	47	17
4.67 ppt +/- 1.49	Strongly oligohaline	9	13	68
9.27 ppt +/- 1.97	Mesohaline	0	2	19
Proportion of correct classifications between sites = 70%				

"Overlap between adjacent classes was high, non-neighboring classes did not seem to overlap. Percent of vegetation correctly classified by environmental variables was 87%, 47%, 68%, and 79% for freshwater, oligohaline, strongly oligohaline and mesohaline, respectively."



BUILDING STRONG®

Percent Organics at Different Marsh Sites

Table 3-3. Mean percent organics of marsh sediments in relation to distance from primary canals, using repeated measures analysis of variance. H_0 : Mean percent organics are equal for each site between dates. (Designations "A" = 20 m, "B" = 70m, "C" = 120m.).

Site	N	Mean Percent Organic			p	Significance
		A	B	C		
0.5 ppt +/- 0.2						
B1M	90	0.47	0.59	0.62	0.0390	Reject, lower at "A" points
1.3 ppt +/- 1.1						
B2M	87	0.44	0.50	0.52	0.1181	ns
2.0 ppt +/- 1.2						
B3M	90	0.29	0.42	0.45	0.0044	Reject, lower at "A" points
7.5 ppt +/- 1.7						
B4M	90	0.31	0.34	0.33	0.8042	ns
F1M	72	0.57	0.65	0.67	0.0091	ns
M1M	72	0.33	0.59	0.67	< 0.0001	Reject, lower at "A" points
M2M	72	0.47	0.68	0.57	0.1176	ns

Dusek and Kitchens
Technical Report (2002)



BUILDING STRONG®

Spatial Patterns in Fish Distribution

Jennings and Weyers (2003)

Polyhaline (>15 ppt)				Mesohaline (5-15 ppt)				Oligohaline (1-5 ppt)				Tidal Freshwater (<1 ppt)			
F	W	Sp	Su	F	W	Sp	Su	F	W	Sp	Su	F	W	Sp	Su
141	324	724	3731	1297	1165	9582	14147	2953	4616	5448	6264	1627	3401	7967	4071
TOTAL: 4,920				TOTAL: 26,191				TOTAL: 19,281				TOTAL: 17,066			

Temporal and Spatial Distribution of Estuarine-Dependent Species in the Savannah River Estuary July 2000-December 2002.

90% of catch were estuarine generalist fish species: Bay Anchovy, Atlantic menhaden, Atlantic croaker, spot, other drum species, gobies, blueback herring, Southern flounder, and striped mullet.


91 fish species identified throughout most habitat types



BUILDING STRONG®

Fish Density and Species Richness in Tidal Creeks

Jennings and Weyers (Feb 2002) Annual Report
Temporal and Spatial Distribution of Estuarine-Dependant Species

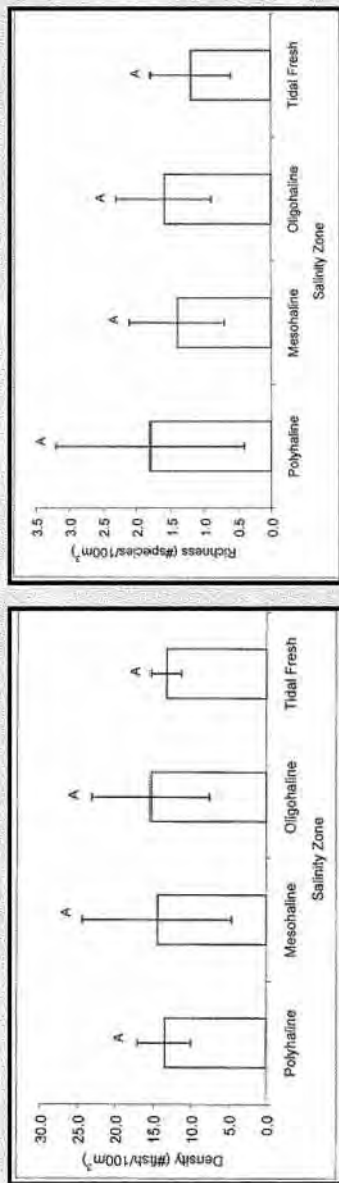


Tidal Freshwater (0-1 ppt); Oligohaline (1-5 ppt); Mesohaline (5-15 ppt); Polyhaline (> 15 ppt)

Figure 5. Mean fish density ($\pm$ st. dev.) and species richness ($\pm$ st. dev.) for ichthyoplankton surveys conducted in the four salinity zones from September 2000 to August 2001. Different letters denote means that were significantly different.

Fish Density and Species Richness Along Marsh Edge

Jennings and Weyers (Feb 2002) Annual Report
Temporal and Spatial Distribution of Estuarine-Dependant Species

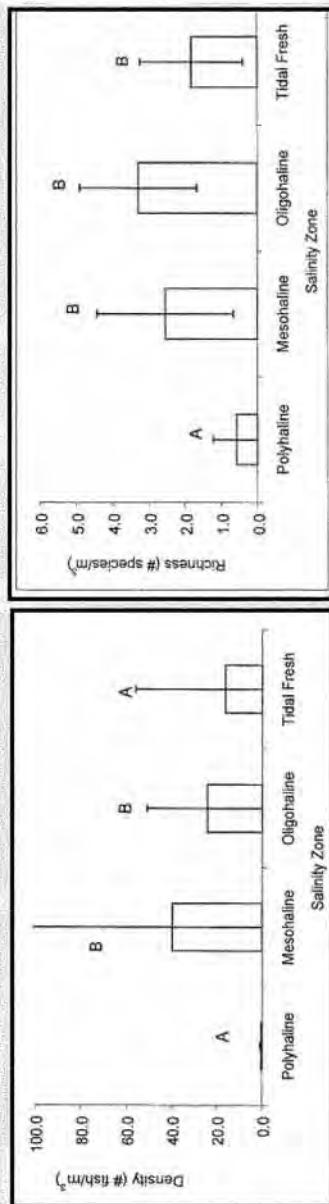

Tidal Freshwater (0-1 ppt); Oligohaline (1-5 ppt); Mesohaline (5-15 ppt); Polyhaline (> 15 ppt)

Figure 9. Mean fish density ($\pm$ st. dev.) and species richness ($\pm$ st. dev.) for marsh-edge drop surveys conducted in the four salinity zones from October 2000 to September 2001. Different letters denote means that were significantly different.



BUILDING STRONG®

Changes in Wetland Function as A Result of Marsh Conversion

(Wetland ICT Procedures: Greater Vegetative Diversity is Beneficial)

Elements of Wetland Function	Freshwater to Brackish Marsh (337 acres)	Saltmarsh to Brackish Marsh (730 acres)
Water Purification	Negligible	Negligible
Flood Protection	Negligible	Negligible
Shoreline Stabilization	Negligible	Negligible
Groundwater Recharge	Negligible	Negligible
Streamflow Maintenance	Negligible	Negligible
Retention of Particles	Negligible	Negligible
Surface Water Storage	Negligible	Negligible
Subsurface Storage	Negligible	Negligible
Nutrient Cycling	Negligible	Negligible
Values to Society	Negligible	Negligible
Fish and Wildlife Habitat	Minor Adverse	Minor Beneficial



BUILDING STRONG®

Changes in Wetland Function as A Result of Marsh Conversion

(Recent Corps Analysis: Salinity Shifts + Data and Literature Review)

Elements of Wetland Function	Freshwater to Brackish Marsh (337 acres)	Saltmarsh to Brackish Marsh (730 acres)
Water Purification	Negligible	Negligible
Flood Protection	Negligible	Negligible
Shoreline Stabilization	Negligible	Negligible
Groundwater Recharge	Negligible	Negligible
Streamflow Maintenance	Negligible	Negligible
Retention of Particles	Negligible	Negligible
Surface Water Storage	Negligible	Negligible
Subsurface Storage	Negligible	Negligible
Nutrient Cycling	Negligible	Negligible
Values to Society	Negligible	Negligible
Fish and Wildlife Habitat	Minor Adverse	Negligible



BUILDING STRONG®

Indirect Impacts: Watershed Assessment to Identify Appropriate Mitigation Options

- Evaluated use of Mitigation Banks:
 - No mitigation banks with credits derived from tidal freshwater wetlands.
- Evaluated use of In Lieu Fee Program
- A perceived high risk of failure for created tidal freshwater wetland systems. USFWS determined not sustainable, and therefore, not viable alternative.



Watershed Approach to Identify Appropriate Mitigation: *Existing Watershed Plan*

- GA DNR-EPD's (2001) Savannah River Basin Management Plan
- Long-term priorities for Lower Savannah River Basin
 - *Preserving habitat suitable for the support of healthy aquatic and riparian ecosystems*



BUILDING STRONG®

Watershed Approach: Considerations

- Identified 20+ considerations in revised EIS
 - Functional Assessment
 - Landscape position, resource type, location, inventory of resources
 - Growth/Land Use Conversion in Lower Savannah River Watershed
 - In SRE, Savannah National Wildlife Refuge (SNWR) is conservation area of national importance
 - Development adjacent to SNWR boundaries could directly/indirectly impact fish/wildlife habitat, wetlands, and water quality



Watershed Approach: *Information Needs*

- Evaluated Watershed Condition and Needs
 - Wetland ICT Coordination and identification of properties in F&W Coordination Act Report
 - Functional Assessment
 - Trends in habitat loss, cumulative impacts, development trends
 - ✓ Development within 5 miles of SNWR
 - ✓ Impaired Waters in Lower Savannah River Watershed and SNWR
 - Presence and needs of sensitive species



Watershed Approach: Site Selection

- Site must be suitable for providing the desired aquatic resource function
 - Comparative wetland analysis: wetland threats, fish and wildlife function, opportunities for mitigation, and long-term sustainability
 - Watershed scale features (aquatic habitat diversity and connectivity)
 - Size and location of compensatory mitigation relative to hydrologic resources.
 - Reasonably foreseeable effects the project will have on aquatic and terrestrial resources




BUILDING STRONG®

SNWR

Existing Boundary
and
Acquisition Boundary
and
Proposed
Mitigation Areas



BUILDING STRONG®

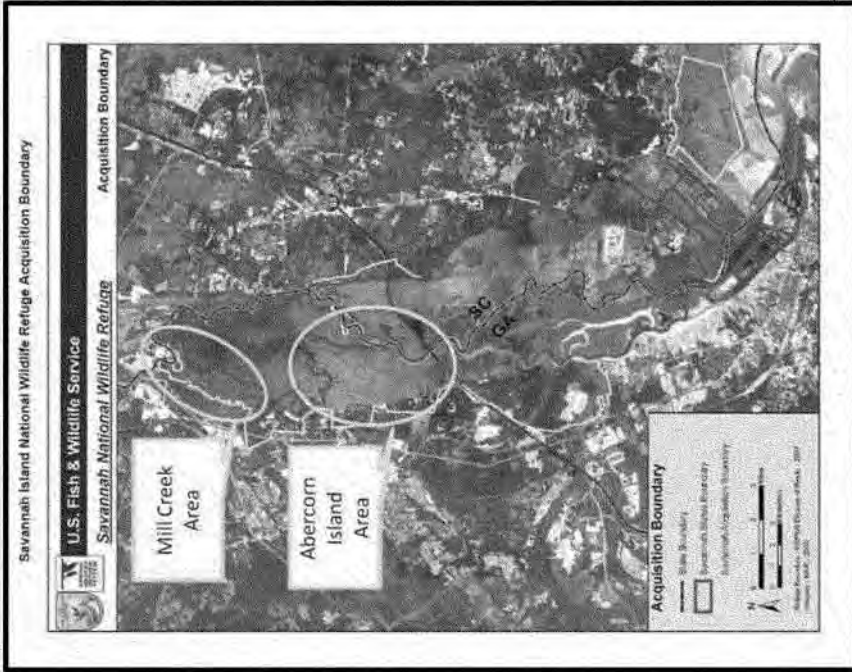

Preservation Sites

(Mitigation for Indirect Impacts)
2,683 acres for Preservation



BUILDING STRONG®

Abercorn Island Area


1,989 Acres of Wetland
0 acres of Upland

National Wetland
Inventory GIS Layer -

Wetland Classifications
For Abercorn Island Area:

PFO1A
PFO6F
PFO1C

Functional
assessment of wetland
preservation areas and
detailed characterization
of wetland types/habitats
is located in Appendix C

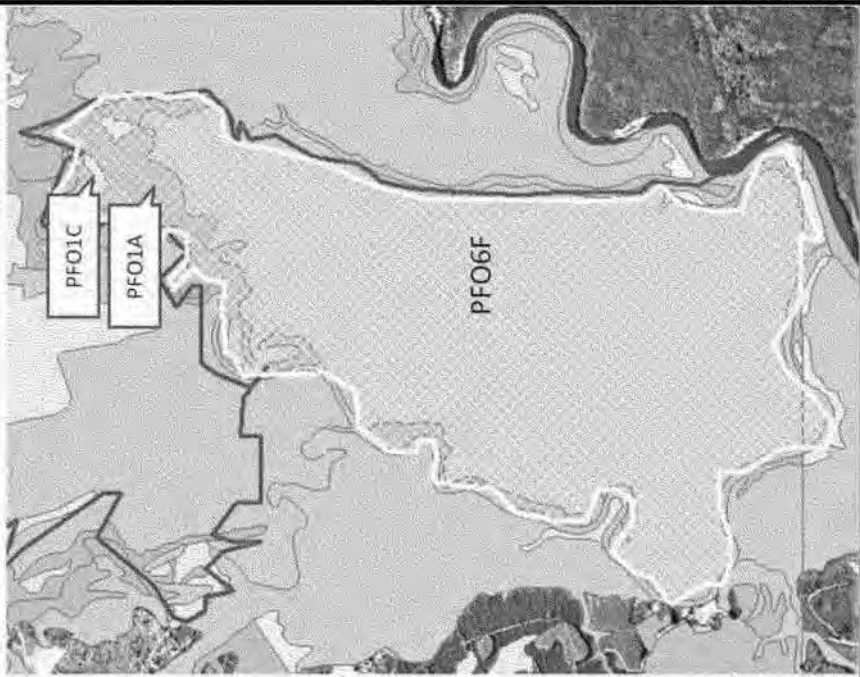

Mill Creek Area

877 acres of Wetland
135 acres of Upland

National Wetland
Inventory GIS Layer –

Wetland Classifications
For Mill Creek Area:

PFO1A

PSS1A

PFO1

Functional assessment
of wetland preservation
areas and detailed
assessment of
wetland types/habitats
is located in Appendix C.



BUILDING STRONG®

Watershed Approach: Mitigation Type and Amount

- Corps recent watershed evaluation and functional assessment confirmed that out-of-kind compensatory mitigation will serve aquatic resource needs of the watershed
- Wetland ICT agreed to use Savannah District SOP as a tool (i.e., suitable metric) to determine how much compensatory mitigation would be required
- Preservation of 2,683 acres is sufficient to replace the impacts to aquatic function that were previously discussed



SOP Worksheets

ADVERSE IMPACT WORKSHEET						
		FRESHWATER MARSH	BRACKISH MARSH	SALT MARSH		
		SALINITY ZONE				
	RANGE	0 to 0.5	0.6 to 4.0	> 4.0		
Dominant Effect	2.0 to 0.5	0.5		0		
Duration of Effects	2.0 to 0.1	2		2		
Existing Condition	2.0 to 0.1	2		1.8		
Lost Kind	2.0 to 0.1	2		2		
Preventability	2.0 to 0	0.5		0.5		
Rarity	2.0 to 0.1	2		0.1		
Sum		9		6.4		
Impacted Acreage		337		730		
Impact Total		3033		4672		
TOTAL						7705



BUILDING STRONG®

RESTORATION WORKSHEET			
	FRESHWATER MARSH	BRACKISH MARSH	SALT MARSH
	----- SALINITY ZONE -----		
RANGE	0 to 0.5	0.6 to 4.0	> 4.0
Net Improvement - Vegetation	0.1 to 1.4	1.4	
Net Improvement - Hydrology	0.1 to 1.4	0.9	
Credit Schedule	0 to 0.4	0.4	
Kind	0.2 to 0.6	0.6	
Maintenance	0 to 0.3	0.2	
Monitoring	0 to 0.4	0.2	
Control	0.1 to 0.5	0.5	
Sum		4.2	
Restored Acreage		1068	
Salinity Zone		0.6 to 4.0	
Restoration Total		4485.6	
TOTAL			4485.6



BUILDING STRONG®

Responsible Parties and Timing

- The Corps would acquire 2,683 acres of land identified in the SNWR's Comprehensive Conservation Plan
- Provide the land to USFWS to manage as additions to the SNWR
- Properties would be acquired prior to or concurrent with the activity that results in conversion of wetland



BUILDING STRONG®

Protection and Long Term Management of Preservation Sites

- The 2,683 acres of Abercorn Island and Mill Creek become part of SNWR
- Managed by USFWS
- Lands would be subject to same protections and use requirements as defined in the National Wildlife Refuge System Improvement Act of 1977 and the SNWR's Comprehensive Conservation Plan



BUILDING STRONG®

Monitoring Marsh Conversion Areas

- Establish 10 monitoring sites in areas subject to vegetative conversion.
- An upriver freshwater site and downriver brackish marsh site will be selected as reference sites
- Sample stations: record water surface elevation, specific conductance of surface waters and interstitial waters, and depth every 30 minutes (downloaded monthly).
- Twice annual vegetation counts - six transects per site (species and stem density)
- Monitor: 1 year pre-construction, 3-4 years during construction, and an additional 5 years post construction
- Wetland ICT provided with annual reports that document findings



Location of Monitoring Sites



BUILDING STRONG®

Adaptive Management

- **Monitoring of marsh sites:**
 - Wetland ICT will be provided annual monitoring reports and consulted frequently for input and recommendations
 - If vegetative conversion extends beyond limits of monitoring, then will establish more sampling sites to determine margins of conversion
 - Additional wetland preservation will be acquired if model results are under predicted.



Summary for Direct Impacts

- Direct impacts to 15.68 acres of brackish marsh result in major adverse impact to all wetland functions
- Restoration of 28.75 acres of brackish marsh at DA 1S is appropriate mitigation and ratio is similar to regulatory projects requiring brackish/salt marsh mitigation
- Monitoring and adaptive management plans are sufficient to ensure “no net loss of aquatic resources”
- Wetland ICT will be active participants in all phases of site development, monitoring, adaptive management, etc.



BUILDING STRONG®

Summary for Indirect Impacts

- Small changes in salinity relative to dynamics of freshwater, oligohaline and mesohaline systems in SRE
- A majority of the areas that experience vegetative shifts will still retain a percentage of pre-project vegetation
- Functional assessment for conversion of freshwater to brackish marsh resulted in negligible impacts to wetland functions with a minor adverse impact to fish and wildlife habitat.
- Functional assessment for conversion of salt marsh to brackish marsh resulted in negligible impacts to all wetland functions
- Mitigation options were considered using a watershed approach with consideration of impacts to wetland function



Summary for Indirect Impacts (Continued)

- Preservation of 2,683 acres of bottomland hardwood and emergent wetland adjacent to SNWR is adequate mitigation for impacts to fish and wildlife habitat
- Proposed monitoring of marsh areas susceptible to vegetative conversion is a long term commitment by Corps to ascertain effects associated with changes in salinity.
- Adaptive management plan Includes the purchase of additional properties to further benefit fish and wildlife habitat adjacent to SNWR.
- Wetland ICT will be active participants in all phases of plan review, monitoring, adaptive management, etc.



BUILDING STRONG®

Final Compensatory Mitigation Rule and Wetland Impacts

- ✓ Functional assessment of impact sites and mitigation areas
- ✓ Watershed approach (considerations, information, site selection)
- ✓ Type and location of mitigation
- ✓ Responsible parties
- ✓ Timing
- ✓ Ecological Performance Standards
- ✓ Monitoring
- ✓ Adaptive Management
- ✓ Long term Management
- ✓ Financial Assurances and Protection



Next Steps

- Corps will respond to agency comments in Final EIS
- New information will be included in Final EIS
- Final EIS will receive agency and public review at end of 2011



BUILDING STRONG®

CESAS-PD

7 June 2011

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project (SHEP) Wetlands Interagency Coordination Team (ICT) Meeting Summary

1. In response to a request from the Environmental Protection Agency (EPA) in their comments on the SHEP Draft Environmental Impact Statement (EIS), the US Army Corps of Engineers, Savannah District (USACE) called a meeting of the SHEP Wetlands Interagency Coordination Team. The meeting was held on 1 June 2011 in Atlanta, Georgia at the EPA Region 4 office and attended by representatives from the following agencies: USACE, EPA; US Fish and Wildlife Service (USFWS); US Department of the Interior; Georgia Department of Natural Resources, Environmental Protection Division (GA DNR-EPD); Georgia Department of Natural Resources, Coastal Resources Division (GA DNR-CRD); South Carolina Department of Health and Environmental Control (SC DHEC); and SC DHEC Office of Coastal Resource Management (SC DHEC-OCRM).

2. The meeting began with Mr. William Bailey (USACE) and Mr. Heinz Mueller (EPA) welcoming the group, introductions of meeting attendees, and a brief overview of the meeting objectives. Mr. Bailey then presented an overview of the project history and summaries of past meetings of the Wetlands ICT. The review included the 2003 determination that tidal freshwater vegetative communities are the most critical wetland community in the Savannah River estuarine ecosystem. He reviewed the development of the salinity criteria that the Corps used to predict and evaluate impacts from harbor deepening and summarized attempts to develop and use Marsh Succession Models to predict marsh impacts, rather than using in-river salinity predictions. Mr. Bailey concluded his presentation with a summary of the most recent Wetlands ICT meeting in August 2009, a site visit to a proposed restoration site at Disposal Area 1S.

3. Dr. Jeff King continued the presentation with technical information on the project's wetland analyses and both the direct and indirect impacts to wetlands that are expected to occur as a result of harbor deepening. Dr. King indicated that the Final EIS would include a more rigorous discussion of the functional assessment analysis the Corps conducted to address EPA's concerns regarding consistency with the 2008 EPA/US Army Corps of Engineers Mitigation Rule. He began his presentation with a discussion of the direct impacts, where wetlands would be lost through excavation during harbor deepening. He showed pictures of vegetation at the various impact sites. He also presented the mitigation plan proposed for those impacts – grading down most of Disposal Area 1S to allow the site to restore to brackish marsh.

4. Dr. King then presented technical information on the project's indirect impacts to wetlands. This included information from wetland studies within the harbor and scientific journal articles that discussed the relationship between observed salinities and vegetative species occurrence, diversity, and function. He compared the nomenclature used in scientific literature to distinguish between the vegetative communities with that previously recommended by the Wetlands ICT and used by the Corps for the SHEP analyses. Based on the expected project change in marsh

salinities of ± 2 parts per thousand, Dr. King summarized that the vegetative conversion would not be a major one and would have a negligible or minor adverse effect on overall wetland function. He identified fish and wildlife habitat as the single wetland function that could change as a result of the expected changes in salinity.

5. After summarizing the expected indirect impacts to wetlands, Dr. King then presented the mitigation plan presented in the Draft EIS to compensate for the expected impacts. He included the District's watershed assessment to identify appropriate mitigation options and all its associated considerations. He showed maps identifying the potential sites for habitat preservation (the chosen mitigation alternative) and the Standard Operating Procedure (SOP) Worksheets that were used as a tool to help assess the preservation acreage requirements for the proposed action. He concluded the presentation with a brief overview of the proposed monitoring network, the adaptive management process that could be implemented should the vegetative conversion exceed that which is expected, and a summary of all the information presented.

6. The group discussion focused on the application of the SOP worksheets to the harbor deepening and the values of certain parameters used in the calculations. The group did not agree that the values applied were consistent, namely the Dominant Effect, Control, and Threat. The group discussed the impacts of the expected vegetative conversion and if there were better tools that could be used to quantify the level of acceptable mitigation for that expected wetland conversion. No other tools or methods were suggested. Mr. Bailey stated that members of the Wetlands ICT had previously recommended using the Savannah SOP as a quantification tool. The worksheets were included in the Draft EIS and the Draft Fish and Wildlife Coordination Act Report (FWCAR). Mr. Bailey also noted that the resource agencies had not expressed concern with the SOP values in their official comments on the Draft EIS or the FWCAR. A portion of the discussion focused on the historical landscape and its value in determining the appropriate mitigation strategy. SC DHEC stated that saltmarsh is ecologically valuable and losses of that community need to be mitigated. The USFWS indicated that while saltmarsh is a valuable vegetative community, the Savannah National Wildlife Refuge (SNWR) was historically tidal freshwater marsh, a unique habitat that had been adversely impacted by higher salinity levels and replaced over time, and is therefore a priority in this estuary because of the historic adverse cumulative impacts. USFWS also indicated that the parcels proposed by the Corps for habitat preservation are not necessarily their present top priority for parcels to add to the SNWR. Ms. Jane Griess (USFWS) indicated that the SNWR prioritizes acquisition of the "Exley" and "De-la-Rae" parcels over the proposed "Mill Creek" parcel. The Corps said it was open to substituting parcels that provided similar or better habitats than those identified in the Draft EIS.

7. The group discussed the desire of some agencies to re-designate their official member of the Wetlands ICT, as a number of the original members have retired or are no longer involved with the project. The group agreed that the Wetlands ICT should be actively involved with the monitoring (particularly the post-construction monitoring), to identify the need for adaptive

management, and enact any agreed measures in a timely fashion. The group also discussed the proposed length of the post-construction monitoring period. Mr. Bailey acknowledged that the natural resource agencies had requested a longer monitoring period and that USACE was internally discussing extending the period beyond the five years stated in the Draft EIS.

8. At the conclusion of the meeting, Mr. Mueller thanked the USACE personnel for presenting the information. Mr. Bailey and Mr. Mueller thanked everyone for attending, and the meeting was adjourned.



MARGARETT G. McINTOSH
Planning Division

Encl

NAME	ORGANIZATION	PHONE	EMAIL
Mackie McIntosh	USACE, Savannah Dist	912-652-5920	margaret.mcmintosh@usace.army.mil
Jeffrey King	USACE, Savannah Dist	628-422-1511	jeffrey.king@usace.army.mil
William Bailey	"	912-652-5781	
Heinrich Mueller	USEPA	404-562-9511	mueller.heinrich@epa.gov
Jennifer Mette	GA EPD	404-562-1752	jennifermette@dnr.state.ga.us
Bill Melville	US EPA	404-562-9266	MELVILLE, WILLIAM @ EPA.gov
Bob Lord	EPA	404-562-9408	lord.bob@epa.gov
Jennifer Derby	EPA	404-562-9401	derby.jennifer@epa.gov
Annie Godfrey	EPA	404-562-9967	godfrey.annie@epa.gov
Joyce Stanley	DOI(OEPC)	404-331-4524	joyce-stanley@ios.doi.gov
PAUL GAGLIANO	EPA	(404) 562-9373	gagliano.paul@epa.gov
Keith Parsons	GA EPD	404-675-1631	keith.parsons@dnr.state.ga.us
Dale Caldwell	GA EPD	912-261-3924	dale.caldwell@dnr.state.ga.us
Chuck Hayes	USFWS	843-784-8911	chuck.hayes@fws.gov
Jane Griess	USFWS	843-784-9911	Jane.Griess@fws.gov
Bill Wikeff	USFWS	912-832-8739	bill.wikeff@fws.gov
Liz Booth	GA EPD	404-675-1675	elizabeth.booth@dnr.state.ga.us
Frederic Preston	SCDHEC	803-898-8105	prestase@dnr.sc.gov
Barbara Neale	SCDHEC	843-952-0245	nealeb@dnr.sc.gov
Chris Beckham	SCDHEC	803-898-4261	beckhaja@dnr.sc.gov
Cheryl N. Williams	SCDHEC	843-953-0832	williams@dnr.sc.gov

C. Fisheries

1. MFR dated 10 November 1999, SHEP, SEG Fisheries Committee: Minutes of October 29, 1999 meeting.
2. MFR dated 24 January 2000, SHEP, SEG Fisheries Committee: Minutes of January 21, 2000 meeting.
3. MFR dated 19 June 2000, SHEP, SEG Fisheries Committee: Minutes of June 19, 2000 meeting.
4. SEG Striped Bass & Fisheries and Aquatic Resources Committee Meeting Summary dated June 21, 2002.
5. MFR dated 23 September 2002, SHEP, Summary of 10 September Interagency Meeting on Evaluation of Fisheries.
6. MFR dated 13 November 2002, SHEP, Summary of 13 November Interagency Meeting on Evaluation of Fisheries.
7. MFR dated 20 December 2002, SHEP, Summary of 19 December Interagency Meeting on Evaluation of Fisheries.
8. MFR dated 20 December 2002, Revised, SHEP, Summary of 19 December Interagency Meeting on Evaluation of Fisheries.
9. MFR dated 6 February 2003, SHEP, Summary of 28 January Interagency Meeting on Evaluation of Fisheries.
10. MFR dated 23 May 2003, SHEP, Summary of 21 April Interagency Meeting on Evaluation of Fisheries.
11. MFR dated 5 June 2006, SHEP, Summary of 1 June Meeting of Fisheries Interagency Coordination Team.
12. E-MAIL from William G. Bailey, dated 7 October 04, SHEP, EFDC and D.O. Model Inputs and Outputs for Fisheries; Habitat Suitability Criteria
13. E-MAIL from William G. Bailey, dated 9 August 07, SHEP, Striped Bass Habitat (velocities)
14. E-MAIL from William G. Bailey, dated 17 March 08, SHEP, Fishery Impact Table
15. E-MAIL from William G. Bailey, dated 29 August 09, SHEP, Fisheries Interagency Coordination Team – Revised Juvenile SNS Habitat Suitability Criteria

CESAS-PD-E

10 November 1999

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
 SEG Fisheries Committee;
 Minutes of October 29, 1999 meeting

PARTICIPANTS:**NAME****REPRESENTING****In Person:**

William Bailey	US Army Corps of Engineers
Frank Mathews	Coastal Georgia Center for Sustainable Development
Tom Meronek	GADNR-WRD
Charles Griffen	GPA
Bo Ellis	ATM
Ed Eudaly	USFWS
Judy Jennings	Sierra Club

By Telephone:

Tripp Boltin	SCDNR
John Pafford	GADNR-CRD
Carl Hall	GADNR-WRD
Ted Will	UGA Fish & Wildlife Coop Unit
Tom Reinert	UGA Fish & Wildlife Coop Unit
Mark Collins	SCDNR-MRD

1. The meeting was held at the Corps of Engineers office in Savannah from 9:00 to 11:45 on Friday, October 29, 1999. Individuals who could not attend in person were able to participate through a teleconference capability.
2. The meeting was structured by first attempting to identify potential impacts to individual fishery resources from the proposed harbor deepening project, then identifying any information needs that would limit or prohibit an evaluation or analysis of the expected project impacts to that resource.
3. We began by discussing the various fisheries for which the South Atlantic Fishery Management Council has developed a management plan. A handout taken from "EFH Guidance for Federal Agencies" listed these plans. The first is the **Shrimp Fishery**. Participants identified that this was an important resource in the area. Potential project effects were from turbidity during construction and alterations of flow velocities. All agreed that the project was unlikely to have a large effect on this resource. Jim Music from GADNR-CRD was identified as a likely source of more information. The **Red Drum/Snapper Fishery** was then discussed. It was also identified as important in this

area. Little is known about the location of juveniles and larvae (early life history) in the immediate project area. Further discussion on this lack of information was held over until later in the meeting. The next several fisheries were taken as a group since they all dealt with fish that primarily spent their lives offshore. This included the **Coastal Migratory Pelagics Fishery**, the **Golden Crab Fishery**, the **Coral and Coral Reef Fishery**, the **Callico Scallop Fishery**, and the **Sargassum Habitat Fishery**. All felt that the project was unlikely to have much impact on these resources. Weakfish were discussed. A management plan had recently been approved for them. This is primarily a recreational fishery. Flounder were also identified as a fishery of importance in the project area.

4. The committee next went through a second handout of fish species for which the NMFS has management plans. This handout was also taken from materials titled "EFH Guidance for Federal Agencies". This list included Billfish, Swordfish, Tuna, and Sharks. For the first three, the committee felt that the project would have no impact since these species were predominantly found offshore. For sharks, the committee felt that the potential project impact would not be substantial, since the project could only impact a small portion of the large expanse of habitat available to the species.

5. The committee then discussed a third handout from materials titled "EFH Guidance for Federal Agencies" that listed the habitats defined as being Essential Fish Habitat by the South Atlantic Fishery Management Council. The first grouping of habitats is titled "Estuarine Areas". The group first discussed **Estuarine Emergent Wetlands**. This habitat was identified as being very valuable to numerous fish species. Information is presently lacking on the use of this habitat by various species, particularly how species use changes with gradients in vegetation corresponding to salinity gradients. Juvenile and larval life stages in particular use this resource. The committee recommended a direct assessment of the habitat's value to fisheries in the harbor. In theory, a habitat model could be used to predict project impacts to fisheries using this habitat, but these models typically require information that is presently unavailable for Savannah Harbor. The direct assessment would determine the species use of various emergent wetland habitats in the harbor. A range of wetland habitats would be assessed, corresponding to the range of salinities in the harbor; saline, brackish, to fresh. Sampling would need to be performed both spatially and temporally (all four seasons). Three sampling gears would be needed to evaluate fishery use of three different categories of habitats: a drop sampler for emergent marsh areas, a bloom (fyke) net for small tidal creeks on ebb tide, and trawls for open water. The field sampling would need to be correlated to site information (such as water depth and substrate type), as well as water chemistry information; salinity, D.O., flow rate, etc. Four to five sampling zones would be needed across the salinity range. Since there has been so much development in the harbor over time, a reference site would also be needed to better reflect conditions at an undeveloped (more natural) area. The Altamaha River was identified as a likely candidate for that purpose since it contains a large freshwater flow, in the same way that

the Savannah River does. Ted Will and Tom Reinert agreed to prepare an initial Scope Of Work to better define this work. They will have something to present at the next committee meeting.

6. **Estuarine Scrub/Shrub Mangroves** was the next habitat on the list. It is not present in the harbor. **Seagrass** was the next habitat. It also is not present in the harbor. **Oyster Reefs & Shell Banks** was the next habitat listed. They would be affected by salinity changes, bank erosion, turbidity during construction, ship wakes, and increases in the number of ships using the harbor. They are present in the lower harbor, along the banks of the main river below Fields Cut and between the jetties, primarily in the intertidal zone. SCDNR may have some data on their occurrence in the harbor. Creation of this habitat was identified as a potential mitigation action. **Intertidal Flats** was the next habitat listed. This habitat is present in the harbor. Shrimp sometimes use these sites as overwintering areas. Fiddler crab use of these sites is important to fisheries and ecological processes in the estuary. Evaluation of the fishery use of these habitats would be included by proper selection of sampling sites in the wetland fishery assessment discussed previously.

7. The next habitat discussed was **Palustrine Emergent Wetlands** (tidal freshwater marsh). The group agreed that this habitat was important, could be impacted by the project, and would be evaluated as part of the wetland fishery assessment discussed previously. The next habitat discussed was **Palustrine Forested Wetlands**. The group agreed that this habitat was important, could be impacted by project-induced changes to salinity or water levels. The group agreed that this habitat should be evaluated by adding another sampling zone to the wetland fishery assessment discussed previously.

8. **Aquatic Beds** was the next habitat discussed. Although there are some beds in the upper portion of Back River, the group felt that the beds were not of sufficient size or frequency to warrant special study.

9. The **Estuarine Water Column** was the final habitat listed and discussed in the Estuarine Areas group. The committee recognized that the project may result in the lower portion of the navigation channel being less suitable for fishery resources. Dissolved Oxygen was the particular parameter of concern. Juvenile life stages were of concern because of their inability to avoid areas of low D.O.. The discussion centered around whether there is sufficient information to determine whether certain species use only portions of the water column. The species of concern were identified as American shad, Hickory shad, and Blueback herring. Of particular interest was the time when the juveniles moved downriver through the harbor to the ocean. These species are known to use sandbars, but the water depth they use when they move through the harbor in later summer and fall was unknown to committee members. The committee agreed to **recommend the following action to the SEG: GPA contact regional experts and conduct a literature review to attempt to determine the expected depth of passage that juvenile American shad, Hickory shad, and Blueback herring use as they migrate downstream through the harbor.** NOTE: The SEG approved this

recommendation at the November 9 meeting with the following addition: **The Committee chair – in consultation with the Committee – will provide GPA with the names of the regional experts to be consulted.**” If sufficient information cannot be obtained, field studies may be needed this fall. SCDNR performed fish sampling during June/July/August/September 1999. They are scheduled to issue a final report in December 1999. Information from their sampling should be of benefit to quantify variations in the harbor in fishery use in the water column. The UGA Coop Unit also has trawl data over the past years that may be useful for this purpose. Other than the issue concerning outmigrating shad, the existing data should provide sufficient information so that no additional sampling is needed for analysis of fishery impacts to this habitat.

10. The second group of EFH habitats listed in the handout from materials titled “EFH Guidance for Federal Agencies” is titled “Marine Areas”. This group included the following habitats: **Live/Hard Bottoms, Coral & Coral Reefs, Artificial/Manmade Reefs, Sargassum, and Water Column**. These habitats are generally offshore areas and the committee felt that these would not be greatly affected by the proposed project. In the area of the bar channel extension, a sidescan survey had already been performed. It did not indicate any hardbottoms.

11. The committee then discussed sturgeon. It was stated that Atlantic sturgeon are present in the Savannah River estuary about 10 months out of the year. Shortnose sturgeon are caught in nets by shad fishermen. Frank Mathews stated that from his experience as a manager of commercial fishermen that it appears that the population of adults has doubled over the past 5 years. Other quantitative data seem to indicate that the number of adults are roughly the same as in 1992, and that a substantial percentage is made up of stocked fish. Mark Collins gave a brief overview of the investigation he was conducting. The group could not reach agreement on whether additional field studies would add additional information for use on this project. Until a concise study objective can be determined, the committee will not recommend any additional field studies for this species. Bill Bailey stated he would contact EPA's Gulf Breeze Laboratory and make a report on the status of their recent work on this species on dissolved oxygen.

12. It was mentioned that the project could have an impact on the Blue Crab fishery. John Pafford stated he would check with other GADNR-CRD staff for information on this fishery.

13. It was mentioned that the South Atlantic Fishery Management Council has a study on red bass that may be helpful.

14. This concluded the group's discussions. The committee agreed to meet again in about a month.

William Bailey
Chairman

CESAS-PD-E

24 January 2000

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
 SEG Fisheries Committee;
 Minutes of January 21, 2000 meeting

PARTICIPANTS:**NAME****REPRESENTING****In Person:**

William Bailey
 Bo Ellis

US Army Corps of Engineers
 ATM

By Telephone:

Prescott Brownell
 Ed Eudaly
 John Pafford
 Tom Meronek
 Carl Hall
 Bert Deener
 Spud Wafford
 Ted Will
 Tom Reinert
 Cecil Jennings

NMFS
 USFWS
 GADNR-CRD
 GADNR-WRD
 GADNR-WRD
 GADNR-WRD
 GADNR-WRD
 UGA Fish & Wildlife Coop Unit
 UGA Fish & Wildlife Coop Unit
 UGA Fish & Wildlife Coop Unit

1. The meeting was held at the Corps of Engineers office in Savannah from 1:30 to 3:30 on Friday, January 21, 2000. Individuals who could not attend in person were able to participate through a teleconference capability.
2. The meeting was called primary to discuss two study proposals that had been submitted to the Committee for consideration. The first proposal was prepared by the UGA Fish & Wildlife Coop Unit at the request of the Committee. This need for this type of work was discussed at the previous Committee meeting. The second proposal was submitted by Dr. Mark Collins as a result of additional thoughts he had since the previous Committee meeting concerning fishery information needs in the Savannah estuary.
3. We began by discussing the proposal prepared by the UGA Fish & Wildlife Coop Unit titled "**Temporal and Spatial Distribution of Estuarine-Dependent Species in the Savannah River Estuary**". This is the evaluation discussed by the Committee to document the fishery habitat value of **Estuarine Emergent Wetlands**. The Committee had previously agreed that a reference site should be included in the work, but this was

not included in the SOW. The Committee's discussions are summarized as follows:

(1) Inclusion of a reference site would probably not be useful for impact analysis purposes. (2) Inclusion of a reference could be useful for identification of cumulative impacts. (3) An evaluation of cumulative impacts would be complicated by the numerous physical and chemical differences between rivers. The group concluded that a reference site would not be needed to accomplish the study's goals of documenting the fishery habitat value of **Estuarine Emergent Wetlands**.

4. The committee then reviewed why the work described in the UGA SOW was needed. The NMFS stated that the work would provide information to address project impacts on Essential Fish Habitat. It would document the relative distribution (seasonally and spatially) of fish species and document the linkage between fish species and habitat types and features. The study would also provide information that would be helpful when evaluating mitigation options. The USFWS stated that the work would describe the relative values of different wetland habitats to estuarine fisheries. The group mentioned that the study would be useful in evaluating the fishery effects of project-induced changes in salinity and river flows. Ted Will (UGA Coop Unit) agreed to include these study outputs in the SOW.

5. The committee then discussed whether the proposed 1-year investigation could answer the study questions or whether a multi-year effort would be needed. A 1-year study would provide a picture of the intra-year variation of fish assemblages. It would identify key habitat areas for specific groups of fish species. However, it would miss the effects of alternate river flow conditions that are expected to alter the physical conditions that are important to determining the physical location in the estuary that a species chooses to reside in at a point in time. Fish communities reside at different locations in the estuary in response to changes in river flows. The largest differences are likely to occur in brackish waters, which is the region most likely to be changed by a channel deepening project. A multi-year study – which includes an alternate river flow regime – would document fishery responses to varying flows that are typical of this estuary. **The group concluded that a 2-year study would be needed to adequately document the use of the estuary by the various fishery communities.** It would help it the impact assessment identify spatial shifts in the fishery communities that are expected as a result of various river flows. Some modification to the SOW would be likely in the second year to optimize the value of the data to be collected. The group also concluded that additional years of this study may be needed as post-construction monitoring to ensure that fishery responses to the modified conditions do not exceed what is predicted.

6. The Committee discussed the proposal prepared by Dr. Mark Collins (SCDNR-MRD) titled **"Spawning Aggregations of Recreationally Important Sciaenid Species in Savannah Harbor"**. John Pafford stated that Sciaenids spawn offshore, inshore and in inlets. These species use deep-water habitats to spawn and are known to use the channel at Kings Bay. Salinity around 20 ppt are needed to buoy the eggs, which are spawned in mid-water, possibly on incoming tides. Larvae and young subsequently move to lower salinity waters. Spawning locations vary by river discharge and temperature.

Fishermen have reported that these species spawn in the Savannah River inlet. The group noted that the study would confirm the presence of spawning aggregations in this estuary. Potential project impacts to the spawning include alterations of salinity or velocities at a site. The Committee decided the SOW needed to include the following features to be performed at the spawning aggregation sites, once sites are identified: (1) water quality sampling, (2) velocity measurements (top to bottom), (3) sediment grabs (with grain size analyses), and (4) egg tows to confirm that spawning is occurring. The chairman would relay the need for these additional features to Dr. Collins for inclusion in the SOW.

7. I then gave a report on the status of EPA's research concerning the dissolved oxygen requirements of juvenile shortnose sturgeon. EPA conducted this research at their Gulf Breeze laboratory last summer. I had spoken with Larry Goodman who oversaw this research. He stated that they had conducted research to confirm what SCDNR had previously identified, that the sensitivity of this species to low D.O. levels decrease with increasing age. The SCDNR was performed using 100-day old fish. EPA was only able to secure 150-day old fish. In phase 1, EPA ran its tests at the same temperature as SCDNR had, and found similar results. In phase 2, EPA increased the temperature to 26 degrees and found that the fish's sensitivity was the same as SCDNR had found. EPA plans to continue its research next summer (phase 3). It hopes to use younger fish and study them at higher water temperatures. Gulf Breeze uses water of 4 ppt salinity. They expect to produce a report on their entire project in March 2001.

8. This concluded the group's discussions. The chairman will redistribute the revised SOWs when he receives them from the authors. Once the Committee approves the scopes, the chairman will present them to the SEG with a recommendation for approval. Hopefully the presentation can be made at the February 1 SEG meeting.

William Bailey
Chairman

CESAS-PD-E

19 June 2000

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
 SEG Fisheries Committee;
 Minutes of June 19, 2000 meeting

PARTICIPANTS:**NAME****REPRESENTING****In Person:**

William Bailey

US Army Corps of Engineers

By Telephone:

Prescott Brownell

NMFS

Ed Eudaly

USFWS

Bo Ellis

ATM

Carl Hall

GADNR-WRD

Bert Deener

GADNR-WRD

Ted Will

UGA Fish & Wildlife Coop Unit

Tom Reinert

UGA Fish & Wildlife Coop Unit

1. The meeting was held at the Corps of Engineers office in Savannah from 9:30 to 10:15 on Monday, June 19, 2000. Individuals who could not attend in person were able to participate by telephone.

2. The meeting was called primary to discuss the results of the documents ATM had prepared titled (1)Literature Review: Migration of Juvenile American shad, Hickory shad, and Blueback herring in the Savannah River, and (2)References. We discussed the "Literature Review", as it summarized the information contained in "References" document.

3. The first item of discussion originated from the 3rd paragraph of the Existing Data section. A statement is included that a major assumption is that the adult American shad all die after spawning. Bert Deener said that his field work revealed < 1 percent of this species are repeat spawners. He said that their analyses of scales over a 10-year period found no evidence of repeat spawning. The Committee agreed that this assumption was a good one to make for the purposes of impact assessment and population dynamics.

4. The second item of discussion originated from the end of the 4th paragraph of the Existing Data section, where it states that "Future study is needed ...". Bo Ellis clarified that these documents were not making any recommendations for additional studies as part of the Expansion Project. The Committee agreed that no additional study was needed on the issue of mortality after spawning.

5. The Committee then discussed the presence of juveniles in the estuary during the summer. The 6th paragraph in the Existing Data section states that juvenile American shad were found in Charleston Harbor from April through the summer and winter until the next February. Bert Deener said that in the Altamaha River, shad show up in the estuary about September. Carl Hall said that he expected fish behavior in the Savannah River to roughly approximate that observed in the Altamaha River, since they are both large rivers. Bert said that juvenile shad are about 70 mm in length by the time they reach the estuary. Tom Reinert said that the UGA Coop Unit had found shad eggs in the trawls they perform in the spring when they are looking for Striped bass eggs. This indicates that shad may be present in the estuary throughout the summer. When juvenile shad are present in the estuary, they are generally found in waters with between 0 – 5 ppt salinity. The area in Savannah Harbor with the sag in dissolved oxygen (D.O.) generally has a higher salinity than that. ATM's hydrodynamic model will identify the size, location and timing of the occurrence of low D.O. areas in the harbor. ATM will be able to use that to see if there are any overlaps of low D.O. and areas frequented by juvenile shad. Carl Hall suggested ATM use criteria in the USFWS Habitat Suitability Index to help define areas within the harbor that provide suitable habitat for these three species. The study being funded by GPA on spatial distribution of estuarine-dependent fish in the Savannah River estuary may also provide information on the presence and habitats frequented by these three species.

6. Ed Eudaly requested a literature review of avoidance mechanisms of these species to low D.O.. Bo Ellis said that ATM would normally do this as part of their development of evaluation criteria. Therefore, no separate recommendation is needed from this committee. Ed Eudaly agreed to send ATM some literature on this issue.

7. The Committee concluded that no further field work was needed to address the issue of timing and depth of passage of out migrating juvenile American shad, Hickory shad and Blueback herring.

William Bailey
Chairman

SEG Striped Bass & Fisheries and Aquatic Resources Committee Meeting Summary

Date: June 21, 2002

Time: 10:00 A.M.

Place: U.S. Fish and Wildlife Service Savannah Coastal Refuge Administrative Office

Members Present:

Bill Post	South Carolina Department of Natural Resources
Ted Will	Georgia Department of Natural Resources WRD
Matt Thomas	Georgia Department of Natural Resources WRD
Terry Stratton	U.S. Army Corps of Engineers
Bill Bailey	U.S. Army Corps of Engineers
Ed Eudaly	U.S. Fish and Wildlife Service
John Robinette	U.S. Fish and Wildlife Service
Tom Reinert	University of Georgia
Cecil Jennings	USGS / Georgia Cooperative Fish and Wildlife Research Unit
Richard Weyers	Georgia Cooperative Fish and Wildlife Research Unit
Larry Keegan	Lockwood Greene
Ron Michaels	Georgia Department of Natural Resources CRD
John Paffert	Georgia Department of Natural Resources CRD
Patrick Geer	Georgia Department of Natural Resources CRD
Bo Ellis	Applied Technology and Management

AGENDA

Striped Bass Committee -

- (1) Ed's striped bass modeling document
- (II) The COEs report "Current Status of Information on Striped Bass in the Savannah River Estuary"
- (III) Spring 2002 striped bass sampling update and the direction for future studies and monitoring

Fisheries and Aquatic Resources Committee -

- (2) Status of current studies
- (3) Assessment of impacts on target species groups through ATM's model (e.g., white & brown shrimp, spotted seatrout & red drum, shortnose and Atlantic sturgeon, and shad)
- (4) Fisheries workshop meeting

Striped Bass Committee

(I) Ed's striped bass modeling document

Listed below are main items that were discussed. Ed and Ted will revisit these items and submit a final draft for review.

Although the document contains four main categories (spawning, egg development, larval development, and egg and larval transport), the general consensus was "there is some overlap" between categories and that model runs could be formatted to meet the committee's needs.

A. Spawning:

1) Discussion began asking for input on the value of velocity as an environmental cue for striped bass spawning. The value was suggested as important, but given the variability of velocity in the Savannah River Estuary (i.e., different discharges and tidal influences) it would be difficult to suggest one key velocity and then expect meaningful data from the model results.

A literature search will be conducted to see if an actual spawning velocities would be meaningful. Also, John Robinette will talk to Tennessee biologist who are conducting research on spawning striped bass in circular tanks.

2) Without velocity, evaluation criteria would be based on reaches of the Savannah River Estuary containing 90th percentile salinities ≤ 1 ppt. Bo Ellis then brought up the point the 90th percentile salinities may be too conservative given the pass or fail mode of the model. After discussions, Tom and Ed suggested the value of adding another output (e.g., 75th percentile salinity ≤ 0.5 ppt). This additional output will be considered for the next draft report.

3) Mean and low river discharge are currently proposed for the model runs. Ted suggested that we may want to include a high flow. After discussions, it was concluded to look at gauge data at Clio from mid-March through the 1st of May (1953 to present) and use a 20th, 50th, and 80th percentile flows for model runs.

B. Egg Development:

1) The committee discussed the evaluation criteria of the mean 50th percentile salinity ≤ 9 ppt. Is this value too liberal or should we consider a

more conservative measure (i.e., mean of 90th percentile salinity)?

2) Again, It was suggested to use 20th, 50th, and 80th percentiles mid-March through the 1st of May flows for model runs.

C. Larval Development:

1) The committee discussed the criteria of the mean 50th percentile salinity ranging from 3-9 ppt. Is mean 50th percentile salinity ≤ 9 ppt suitable for the model. Again, do we want to take the mean of the 50th percentile salinity or the 90th percentile salinity?

2) Ted indicated that some past research has shown 1-2 day old striped bass larvae as being the most susceptible to increased salinities. Given this fact, should the model flow data reflect the peak spawning period (Mid-march through the 1st of May). Ed pointed out that there may be dissolved oxygen (D.O.) problems during end of May and June and wanted to include May-June flows and D.O.'s in the model. It was then suggested that we use two different flow regimes.

3) Bo pointed out that we need to be aware of temperature outputs when we are obtaining D.O. readings for the proposed time periods that we want the model runs to encompass. Ed and Tom suggested weekly or daily water temperature outputs need to be considered in the model to correct D.O. readings.

4) Again, for whatever time periods we consider to run the model, use 20th, 50th, 80th percentiles for discharge.

D. Egg and Larval Transport

Questions were raised concerning how the model would predict egg transport. Discussion was brought up about how the egg would drift within the model (i.e., would a drift rate of 64% of the average current velocity be used or not), and can the model could approximate the actual drift (throughout the water column) of striped bass eggs. A decisions on the validity and usefulness of this data will be considered.

(II) USCOE's report "Current Status of Information on Striped Bass in the Savannah River Estuary"

The report was well prepared and received. Further peer review is needed. Individuals with knowledge of striped bass biology in coastal rivers comments will on potential data gaps that may have missed or overlooked.

Matt Thomas has agreed to comment and Terry Stratton will call other state fishery biologist.

(III) Spring 2002 striped bass sampling update and the direction for future studies and monitoring

1) Ted gave a sampling update from the Savannah River. Fewer large (> 9 kg) striped bass were collected this year. Two main factors likely contributed to this decrease in catch: 1) low flows and increased water temperatures likely cued large fish to migrate further north beyond the standardized sampling area, and 2) increased salinities prohibited electrofishing in the lower reaches of the estuary during late-February and early March.

2) One day of electrofishing trip was conducted above Hwy. 301 (about RM 130-150). In 2.85 pedal hours, four large (>9 kg) female striped bass were collected. Two of the fish were spent and two fish were gravid.

3) The significance of spawning in the upper Savannah River is unknown and if spawning is related to river discharge (with low discharges correlated with increased salinities and higher water temperatures).

4) No data has been collected on striped bass recruitment in the upper reaches of the Savannah River. GADNR will conduct night shocking survey to assess recruitment of juvenile striped bass during July-September.

5) GADNR will be monitoring thermal refuge above and below the New Savannah Bluff Lock and Dam.

6) Ted mentioned that spatial striped bass egg and larvae collections at the historic sampling areas combined with sampling in the upper reaches (RM 60-180) would be beneficial information. Perhaps under normal flow years there would be the appropriate environmental cues favoring the upper Back River for striped bass spawning habitat. Further, under low, normal, or high flows what is the contribution of striped bass spawning in the upper reaches (RM 60-180).

7) Richard Weyers mentioned that Georgia Cooperative Fish and Wildlife Research Unit (GACCOOP) collected about 40 striped bass larvae in mid-March of 2002. The larvae were collected on the Front River at RM 26. Collecting this many striped bass larvae was surprising for three reasons. First, studies in 1999 and 2000 resulted in no larval striped bass collected. Secondly, the amount of sampling effort in past studies (7 days a week from

mid-March through May) was much more extensive than the present study (4 sample periods in one month). Finally, collecting larvae in mid-March is early into the spawning season (spawning peak is generally in mid-April).

Fisheries and Aquatic Resource Committee

(I) Status of Current Studies

Bill Post gave an sampling update for SCDNR. Everything is going well, an annual report should be posted on the web site soon and the final report should be completed by December 2002. Richard Weyers gave an update for GACOOOP. Mentioned that their annual report is posted on the web site, gave brief description of sampling efforts and number of species collected, and the final report should be available by December 2002.

(II) Assessment of impacts on target species groups through ATM's model (e.g., white & brown shrimp, spotted seatrout & red drum, shortnose and Atlantic sturgeon, and shad)

Ted began discussions by reading Prescott Brownells (NMFS) email regarding this assessment. Prescott suggested in the email that "we consider using a small (3-5) selection of estuarine and freshwater species models as an 'extension' of ATM's hydrodynamic model. Using a team approach we can easily adjust the species models to more accurately reflect Savannah River conditions.

A listing of models (and species profiles) is available from the USGS National Wetlands Research Center at the following link:

<http://www.nwrc.usgs.gov/diglib.htm>

We should be able to use selected models plus outputs from the ATM hydrodynamic model with GIS to identify and display changes in suitable habitat area and location from historic conditions, present conditions, and forecast changes with project alternatives and mitigation alternatives."

After much discussion it was decided that the first step was to identify species of concern. John Pafford and Patrick Geer would review GACOOOP's annual report and then provide feedback on any saltwater/estuarine species that they may need further consideration. It was decided that a process of soliciting volunteers to look at literature (Habitat Suitability Indices and Species Profiles) for the identified species of concern should begin. One committee member would pick one fish species and then provide feedback to committee on potential impacts.

Mark Collins was volunteered for shortnose and Atlantic sturgeon and Patrick Geer volunteered for white and brown shrimp.

(III) Fisheries workshop meeting

The committee agreed that the final reports from SCDNR and GACCOOP need to be completed and reviewed before holding the workshop. If reports are completed by December 2002, the suggested time to hold the fisheries workshop was February 2003.

CESAS-PD-E

23 September 02

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 10 September Interagency Meeting on Evaluation of
Fisheries

1. Attendees:
 USFWS: Ed Eudaly
 NMFS: Prescott Brownell
 SCDNR: Priscilla Wendt and Mark Collins
 GADNR-WRD: Matt Thomas and Ted Will
 GADNR-CRD: Pat Geer
 COE: Bill Bailey
 ATM/GPA: Bo Ellis and Bridget Callahan
 GA Coop: Cecil Jennings and Tom Reinert
2. The Agenda is attached.
3. After introductions I explained the purpose of the interagency meeting.
4. I then reviewed the **Completed and Ongoing Fisheries Studies**. A list is included in the agenda.
5. We then discussed the **Potential Need for Additional Fishery Field Studies**. I explained one flow rerouting that had been proposed and that the project would be evaluating – closing Houston Cut and rerouting flow through Steamboat Bend; accompanied by closing Middle River and rerouting the downstream exit to Back River near New Cut. Members of the group were concerned about possible reductions in fish passage between Front River and Middle River. The group also identified the lower end of Middle River as the location for juvenile shortnose sturgeon during the winter in the study conducted as part of this project. We agreed that this proposal would be a major modification to the estuary and would need to be examined thoroughly.

The group mentioned that the completed and ongoing studies will all have been conducted during a drought. The distribution of fish would differ somewhat during normal flow conditions. Members of the group expressed a desire for the following studies to be conducted under normal flow conditions:

- Striped bass egg and larval study
 - Where is spawning occurring under normal flows?
 - How much spawning occurs in the estuary under normal flows?

- Shortnose Sturgeon

Where do the juveniles stay during normal flows?

Is the lower end of Middle River critical to this population?

- Striped bass spawning/flow conditions

Velocity measurements at spawning locations and egg development areas under normal flows. Are the average velocities sufficient to meet the habitat requirement (velocity) to keep the eggs suspended?

6. We then discussed **Impact Evaluation Techniques**.

I explained the procedure I hoped to follow – combine a Habitat Suitability Index Model with the Hydrodynamic Model to identify and quantify locations of suitable habitat. Ed Eudaly and Ted Will had worked on this approach through the SEG Striped Bass Committee as a way to identify acceptable habitat and project impacts to Striped Bass. Cecil mentioned that Tom Reinert was developing a Decision Support Model for Striped Bass. It will include probabilities of impact and should be available next year. No one identified an alternate impact evaluation approach for this project. I stated that should someone come across an alternate approach in the future that they think may work better, they should let the group and the Corps know.

7. We then discussed what species should be evaluated in the EIS. The agenda includes a list that Pres Brownell had suggested may be appropriate for inclusion in the EFH Evaluation. Pres suggested that if the right species could be identified, it may be sufficient to fully evaluate 1 or 2 species plus an anadromous or diadromous species. The group concluded that there was insufficient information on Atlantic sturgeon to define acceptable criteria in the estuary. Since an HSI model is not available, the group decided to drop Atlantic silversides from the list. The group agreed that Shortnose sturgeon should be one of the species evaluated in detail; Striped bass would be another. The group thought that Blue Crabs should be considered because of their commercial importance. Although shrimp may not be particularly sensitive to salinity changes, it may be beneficial to evaluate them because of their commercial importance. Red drum should be evaluated because of their recreational importance. Southern flounder and Spotted seatrout should also be considered because of their recreational importance.

We briefly mentioned water quality factors that would be important to specific species:

- Shad: D.O. and temperature for the young; mean river discharge
- Shrimp: Temperature and salinity; D.O. not an effect

8. The next step is examination of the HSI Models to identify whether they could be used to obtain water quality parameters that could define acceptable habitat. The group agreed to divide the review of the HSI models as follows:

- | | |
|----------------------|--|
| • Striped Bass | USFWS (Ed Eudaly) |
| • Shortnose sturgeon | SCDNR (Mark Collins) and
NMFS (Pres Brownell) |
| • American shad | NMFS (Pres Brownell) |
| • Red Drum | SCDNR (Priscilla Wendt – coordinator) |
| • Spotted Seatrout | SCDNR (Priscilla Wendt – coordinator) |
| • Shrimp | GADNR (Pat Geer) |
| • Blue Crab | GADNR (Pat Geer) |
| • Southern Flounder | ATM (Bridget Callahan) |

For their specific species, the individuals would do the following:

- Review the HSI Model and available information
- Recommend whether it is doable to identify criteria of acceptable habitat for which the Hydrodynamic Model could be used to identify locations and quantity of areas meeting the criteria
- Identify which characteristics would define acceptable habitat
- Recommend specific parameters (if possible) that would define acceptable habitat

Each reviewer would present their findings to the group for their consideration. If additional reports needed to be obtained, ATM would most likely be identified as organization to obtain them.

I distributed the Striped Bass Application developed by Ed and Ted as an example for the reviewers and stated that a goal would be to develop a similar document for each species.

9. We agreed that it would take at least a month to review these HSI Models. I will schedule another interagency meeting in 1-2 months.

William Bailey
Environmental Resources Branch

SAVANNAH HARBOR EXPANSION PROJECT

FISHERIES WORKGROUP

SEPTEMBER 10, 2002

AGENDA

INTRODUCTIONS

PURPOSE OF THE WORKGROUP

ONGOING / COMPLETED FIELD INVESTIGATIONS

- Striped Bass Egg & Larval Distribution
- Literature Review: Migration of Shad and Blueback Herring in Savannah Harbor
- Contacts with Regional Experts on Fish Migration
- Distribution of Shortnose Sturgeon
- Spawning Aggregations of Sciaenid Species
- Temporal & Spatial Distribution of Estuarine Dependent Species

NEED FOR ADDITIONAL FIELD STUDIES

- Proposal to close Houston Cut
- Others ??

SPECIES TO CONCENTRATE ON FOR IMPACT ASSESSMENT

- Species identified by NMFS under EFH
 - Atlantic and shortnose sturgeon
 - Striped bass
 - White and brown shrimp
 - American shad
 - Juvenile spot
 - Red drum
 - Atlantic silversides
- Others ??

IMPACT EVALUATION TECHNIQUES

- Combine HSI models with Hydrodynamic Model to identify areas of acceptable habitat
- Others ??

EVALUATION OF IMPACTS TO FISHERIES

TECHNIQUE: Combine HSI models with Hydrodynamic Model to identify areas of acceptable habitat

STRIPED BASS

Plan developed through the SEG Striped Bass Committee (Ed Eudaly)

- Spawning
- Egg Development
- Larval Development

STURGEON

Review of HSI by SCDNR (Mark Collins)

SHRIMP

Review of water quality requirements by GADNR-CRD (Patrick Geer)
Review of HSI

JUVENILE SPOT

Review of HSI by GADNR-CRD (Patrick Geer)

RED DRUM

Review of HSI by SCDNR

AMERICAN SHAD

Review of HSI by GADNR-CRD (Patrick Geer)

ATLANTIC SILVERSIDES

No HSI model on website

CESAS-PD-E

13 November 2002

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 13 November Interagency Meeting on Evaluation of
Fisheries

1. Attendees:
 USFWS: Ed Eudaly
 NMFS: Prescott Brownell
 SCDNR: Mark Collins
 GADNR-WRD: Matt Thomas and Ted Will
 GADNR-CRD: Pat Geer
 COE: Bill Bailey
 ATM/GPA: Bridget Callahan
 GA Coop: Cecil Jennings and Richard Weyers
2. The Agenda is attached.
3. The following is a summary of the discussion and does not include all the information that was presented or all comments made during the discussion.
4. I explained the purpose of this interagency meeting: To discuss how information from the HSI models could combined with the Hydrodynamic Model to identify areas of acceptable habitat.
5. We started with **Striped Bass**. We discussed the broad changes we had made as the Application was refined – how we eliminated transport due to uncertainties in the Hydro Model; how the percentages were based primarily on literature, and that we had a several site-specific studies to use. We concluded that the Version 6.0 dated September 18, 2002 of the Striped Bass Application is acceptable to identify project impacts.

 We also discussed having the Hydro model identify minimum D.O. values at 0.1 mile intervals. This information would not be part of the habitat suitability criteria, but may provide useful information to understand aquatic habitats in the estuary.
6. We then discussed **Shortnose sturgeon** and Atlantic sturgeon. Mark informed us of what he had gathered from he and Pres' review of the HIS and other knowledge they had of the species. The existing models do not help much with this estuarine site. The summer habitat appears to be deep areas (15 to 20 feet deep) with 0 to 1 ppt salinity. Sturgeon larvae have been collected in the Savannah estuary by UGA. Juveniles use areas with salinity 3 to 9 in the winter and 0.1 to 0.2 in the summer. It appears that there not sufficient information available to develop suitability criteria for Atlantic sturgeon.

The habitat evaluation should be performed on both winter and summer conditions. We believe that substrate and velocity can be eliminated from consideration. Velocity is primarily an issue during spawning. The habitat of concern is along the bottom -- either the bottom layer of the model or the bottom 6 feet of the water column. Mark and Pres would continue to work together to document and define the habitat definitions for use with the Hydrodynamic Model.

7. We then discussed **Red drum**. Mark said this species is probably not a good one for application of the Hydro model. He thought the ecological problems that this species has do not relate to water quality. He stated that tidal creeks are a nursery habitat, so providing access to more creeks could be potential mitigation option. He stated that there are concerns about potential impacts to spawning aggregations during construction of the Expansion Project. He said that a dredging window near the mouth of the river may be necessary. We agreed that no further work will be done with this species to link the habitats to the Hydrodynamic Model.

8. We discussed **Spotted seatrout**. Mark said this species has similar issues as Red drum and will likely not be a good candidate for application of the Hydro model. As with Red drum, nursery habitat is a limiting factor. He envisioned no concerns about a dredging window with this species. We agreed that no further work will be done with this species to link the habitats to the Hydrodynamic Model.

9. We discussed **Blue crab**. Pat said that spawning occurs near the mouth of the river and eggs and larvae are transported offshore. Salinity is important, with acceptable levels generally being <12 ppt. Early juveniles use areas with salinity <5 ppt. Declines in populations have occurred recently, with the drought-induced salinity intrusion being a significant factor. Blue crab move further upriver as the salinity moves up the estuary. This species is likely to not be too sensitive to the expected incremental project-induced changes. We agreed that no further work will be done with this species to link the habitats to the Hydrodynamic Model.

10. We discussed **Shrimp**. Pat said that White shrimp move offshore in April and May to spawn. The amount of tidally-flooded vegetation is important. This species is likely to not be too sensitive to the expected incremental project-induced changes. We agreed that no further work will be done with this species to link the habitats to the Hydrodynamic Model.

11. We discussed **Southern flounder**. Bridget said that flounder appeared to be most sensitive to D.O., appearing to need > 4.5 ppm. Larvae need salinity of 0 to 5 ppt and occur during the months of January and February. The critical time for adults would be the summer months, June/July/August. We agreed that substrate was not critical in the analysis of flounder habitat at this site since the constant shoaling would cover any

naturally hard river bottom material. The group agreed to continue work on developing a model application for this species. The application should have two components: larvae and adults. Bridget will continue to refine the habitat requirement write-up for this species.

We will consider adding a second separate step to this analysis to include the value of tidally marsh along the river. This would allow us to capture the value of the tidal marshes to several estuarine-dependent species.

12. We discussed **American shad**. Pres said that from studies conducted in northern areas, eggs and larvae need D.O. > 5 ppm. D.O. levels of 5 ppm were found to be lethal to outmigrating juveniles. Shad are found near the bottom during the day and near the top at night. Juveniles would be of most interest in this estuarine project area. Larvae are probably found further upstream, out of the immediate project area. More information is needed about two items: (1) the residence time of this species in the Savannah River estuary, and (2) how lower natural D.O. levels in southern estuaries affects their presence in the harbor area. Pres would summarize what he had found. Bridget will pursue additional information on the two issues.

13. One side comment made was that oysters and Spartina form much of the base of a properly-functioning estuarine ecosystem. If/when one becomes available, the resource agencies would like a GIS file containing a recent aerial photograph or satellite image showing the harbor and estuary. I concluded by stating that I would call another meeting in about a month (before December 20th).

William Bailey
Environmental Resources Branch

SAVANNAH HARBOR EXPANSION PROJECT
INTERAGENCY FISHERIES COORDINATION
NOVEMBER 13, 2002

AGENDA

INTRODUCTIONS

OVERVIEW OF PREVIOUS MEETING

- Completed & Ongoing Studies
- Species of Concern
- Impact Evaluation Techniques

REVIEW PURPOSE OF THE MEETING

- Discuss information from HSI models for identification of areas of acceptable habitat

SPECIES TO CONCENTRATE ON FOR IMPACT ASSESSMENT

- | | |
|----------------------|--|
| • Striped Bass | USFWS (Ed Eudaly) |
| • Shortnose sturgeon | SCDNR (Mark Collins) &
NMFS (Pres Brownell) |
| • Red Drum | SCDNR (Priscilla Wendt – coordinator) |
| • Spotted Seatrout | SCDNR(Priscilla Wendt – coordinator) |
| • Shrimp | GADNR (Pat Geer) |
| • Blue Crab | GADNR (Pat Geer) |
| • Southern Flounder | ATM (Bridget Callahan) |
| • American shad | NMFS (Pres Brownell) |

WRAP-UP

- Next Meeting

CESAS-PD-E

20 December 2002

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 19 December Interagency Meeting on Evaluation of Fisheries

1. Attendees:
ATM/GPA: Bo Ellis
Bridget Callahan

By phone:
USFWS: Ed Eudaly
NMFS: Prescott Brownell
SCDNR: Mark Collins
COE: Bill Bailey
2. The Agenda is attached.
3. The following is a summary of the discussion and does not include all the information that was presented or all comments made during the discussion.
4. I reviewed our previous meeting and the major conclusions we reached. We completed our work on the Striped Bass application. We decided that no further work was needed to attempt to use the Hydrodynamic Model to the Habitat Suitability Indexes for the following species: Atlantic sturgeon; Red drum; Spotted seatrout; Blue crab; and Shrimp. We will continue work on Shortnose sturgeon; Southern flounder; and American shad.
5. We started with a **clarification of the use of the Hydro Model to determine minimum levels of dissolved oxygen (D.O.)**. We had discussed this at our previous meeting, but I was uncertain of exactly what information we should ask the model to produce. We decided that the 5 percent occurrence values should be identified as a measure of the minimum D.O. levels in the estuary. This data should be reported every 0.2 mile along each river in the estuary. The information would not be part of the habitat suitability criteria, but would be additional information to assess the general fishery habitat conditions in the estuary under those flow conditions. At this point, we will request this information for every species that we use the Hydro Model to assist in the evaluation of project impacts.
6. We then discussed **Southern Flounder**. Bridget had been somewhat unsure of what actions she needed to take. Because of the seasonal differences in their occurrence in the harbor, we agreed that the analysis should evaluate habitat for both adults and juveniles. By this decision, we substituted juveniles for larvae from the position we

reached at our last meeting. This substitution is due to (1) the occurrence of juveniles in the estuary over a longer duration than larvae, and (2) the temporal overlap of adult's occurrence with that of larvae. Juveniles are present in the estuary over the spring, summer and fall months. We will evaluate the summer months, since the habitat will be most limited during that period due to the requirement for relatively higher D.O. levels. Bridget will review the HSI criteria for D.O. to determine the 0.7 suitability threshold. We expect it is around 4.0 mg/L. Unless she uncovers something to indicate that is not a good number to use, we will use 4.0 mg/L as our criteria. The location in the water column where that would be determined is at the bottom. Bridget will revise the application for this species prior to our next meeting.

7. We then discussed **American shad**. Bridget reviewed that the studies for the HSI had been conducted primarily in northern areas. As opposed to behavior in the north, it is believed that for American shad in the south, (1) adults are not repeat spawners, and (2) juveniles overwinter in the estuary. This species uses two types of habitat in the Savannah River: (1) Riverine -- spawning adults, freshwater, January to May, and (2) Estuary -- juveniles and migrating adults, emergent or submerged vegetation is important, November to March. Relatively high D.O. is needed by this species. Juveniles need >3.0 mg/L for equilibrium. In the Temporal and Spatial Distribution Study conducted in this estuary, shad were found at locations with D.O. $\geq$ 4.1 mg/l. We decided to use 4.0 mg/l as our criterion for acceptable habitat. There is no need to look further at adult habitat because they move through this harbor when the water is cooler, and therefore when the D.O. is higher. We will look at juveniles and use the following criteria: summer months; D.O. $\geq$ 4.0 mg/l; bottom layer. Bridget will revise her write-up to include our conclusions and any other information she may find from additional research.

8. We discussed **Shortnose sturgeon**. Salinity and D.O. are critical water quality parameters. In the summer, sturgeon move upriver out of the harbor. Pres indicated we may want to consider designating an "Area of Concern" where no impacts are desired. This area is just above the mouth of the Middle River, where SCDNR found sturgeon during the winter in their most recent monitoring. This designation would be separate from any habitat areas identified by the Hydro Model. We agreed that we should look at both winter and summer conditions, since it is believed that these are the two seasons in which the fish are under the greatest environmental stress. Pres will document his and Mark's findings and our discussions, and prepare a paper describing the habitat criteria we could use to identify suitable habitat in the Savannah River estuary.

9. Next meeting: Preliminary date: Tuesday, January 28 starting at 9:30 AM.

William Bailey
Environmental Resources Branch

SAVANNAH HARBOR EXPANSION PROJECT

INTERAGENCY FISHERIES COORDINATION

DECEMBER 19, 2002

AGENDA

REVIEW OF PREVIOUS MEETING

- Completed procedure to ID habitat for Striped Bass
- Question on Dissolved Oxygen
 - How to measure minimum levels
 - All species or just Striped Bass runs
- Deleted further work to link to Hydro Model on:
 - Atlantic Sturgeon
 - Red Drum
 - Spotted Seatrout
 - Blue Crab
 - Shrimp

CONTINUE WORK ON THESE SPECIES FOR IMPACT ASSESSMENT USING HYDRO MODEL

- | | |
|----------------------|--|
| • Southern Flounder | Bridget Callahan |
| • American shad | Pres Brownell summarize existing info |
| | Bridget Callahan info on Residence time |
| | Effects of low DO |
| • Shortnose sturgeon | Pres Brownell & Mark Collins |

WRAP-UP

- Next Meeting

CESAS-PD-E

20 December 2002

Revised

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 19 December Interagency Meeting on Evaluation of Fisheries

1. Attendees:
ATM/GPA: Bo Ellis
Bridget Callahan
COE: Bill Bailey

By phone:
USFWS: Ed Eudaly
NMFS: Prescott Brownell
SCDNR: Mark Collins
2. The Agenda is attached.
3. The following is a summary of the discussion and does not include all the information that was presented or all comments made during the discussion.
4. I reviewed our previous meeting and the major conclusions we reached. We completed our work on the Striped Bass application. We decided that no further work was needed to attempt to use the Hydrodynamic Model to the Habitat Suitability Indexes for the following species: Atlantic sturgeon; Red drum; Spotted seatrout; Blue crab; and Shrimp. We will continue work on Shortnose sturgeon; Southern flounder; and American shad.

Review of the Habitat Suitability Index models for red drum, seatrout, crab, and shrimp revealed that these models were generally not designed for use in evaluating changes in salinity or dissolved oxygen. That does not mean that those species are not affected by changes in salinity and D.O., but the models were designed to assess changes in other habitat variables. Rather than spend time developing modified models responsive to D.O. and salinity, it was realized that other species and key life stages could be employed as surrogates for the estuarine fish community. Accordingly, a focus on Shortnose sturgeon, Southern flounder, Striped bass and American shad is appropriate for initial habitat analysis employing the Hydrodynamic Model.
5. We started with a **clarification of the use of the Hydro Model to determine minimum levels of dissolved oxygen (D.O.)**. We had discussed this at our previous meeting, but I was uncertain of exactly what information we should ask the model to produce. We decided that the 5 percent occurrence values should be identified as a measure of the minimum D.O. levels in the estuary. This data should be reported every

0.2 mile along each river in the estuary. The information would not be part of the habitat suitability criteria, but would be additional information to assess the general fishery habitat conditions in the estuary under those flow conditions. At this point, we will request this information for every species that we use the Hydro Model to assist in the evaluation of project impacts.

The Hydro Model can display zones (spatial distribution) of dissolved oxygen under test scenarios. We will then be able to identify changes in area of available suitable habitat under the various test scenarios. The reporting of minimum levels of D.O., as discussed in the previous paragraph) will also allow us to identify any areas with D.O. problems that may develop under the test scenarios.

6. We then discussed **Southern Flounder**. Bridget had been somewhat unsure of what actions she needed to take. Because of the seasonal differences in their occurrence in the harbor, we agreed that the analysis should evaluate habitat for both adults and juveniles. By this decision, we substituted juveniles for larvae from the position we reached at our last meeting. This substitution is due to (1) the occurrence of juveniles in the estuary over a longer duration than larvae, and (2) the temporal overlap of adult's occurrence with that of larvae. Juveniles are present in the estuary over the spring, summer and fall months. We will evaluate the summer months, since the habitat will be most limited during that period due to the requirement for relatively higher D.O. levels. Bridget will review the HSI criteria for D.O. to determine the 0.7 suitability threshold. We expect it is around 4.0 mg/L. Unless she uncovers something to indicate that is not a good number to use, we will use 4.0 mg/L as our criteria. The location in the water column where that would be determined is at the bottom. Bridget will revise the application for this species prior to our next meeting.

7. We then discussed **American shad**. Bridget reviewed that the studies for the HSI had been conducted primarily in northern areas. As opposed to behavior in the north, it is believed that for American shad in the south, (1) adults are not repeat spawners, and (2) juveniles overwinter in the estuary. This species uses two types of habitat in the Savannah River: (1) Riverine -- spawning adults, freshwater, January to May, and (2) Estuary -- juveniles and migrating adults, emergent or submerged vegetation is important, November to March. We will consider that shad juveniles may be in the estuary at any month of the year, particularly summer months, not limited to November to March. Relatively high D.O. is needed by this species. Juveniles need >3.0 mg/L for equilibrium. In the Temporal and Spatial Distribution Study conducted in this estuary, shad were found at locations with D.O. $\geq$ 4.1 mg/l. We decided to use 4.0 mg/l as our criterion for acceptable habitat. There is no need to look further at adult habitat because they move through this harbor when the water is cooler, and therefore when the D.O. is higher. We will look at juveniles and use the following criteria: summer months; D.O. $\geq$ 4.0 mg/l; bottom layer. Bridget will revise her write-up to include our conclusions and any other information she may find from additional research.

8. We discussed **Shortnose sturgeon**. Salinity and D.O. are critical water quality parameters. In the summer, sturgeon move upriver out of the harbor. Pres indicated we may want to consider designating an "Area of Concern" where no impacts are desired. This area is just above the mouth of the Middle River, where SCDNR found sturgeon during the winter in their most recent monitoring. This designation would be separate from any habitat areas identified by the Hydro Model. He and Mark will try to identify those areas, based on the telemetry study experiences, prior to the next meeting. We agreed that we should look at both winter and summer conditions, since it is believed that these are the two seasons in which the fish are under the greatest environmental stress. Pres will document his and Mark's findings and our discussions, and prepare a paper describing the habitat criteria we could use to identify suitable habitat in the Savannah River estuary.

9. Next meeting: Preliminary date: Tuesday, January 28 starting at 9:30 AM.

William Bailey
Environmental Resources Branch

SAVANNAH HARBOR EXPANSION PROJECT

INTERAGENCY FISHERIES COORDINATION

DECEMBER 19, 2002

AGENDA

REVIEW OF PREVIOUS MEETING

- Completed procedure to ID habitat for Striped Bass
- Question on Dissolved Oxygen
 - How to measure minimum levels
 - All species or just Striped Bass runs
- Deleted further work to link to Hydro Model on:
 - Atlantic Sturgeon
 - Red Drum
 - Spotted Seatrout
 - Blue Crab
 - Shrimp

CONTINUE WORK ON THESE SPECIES FOR IMPACT ASSESSMENT USING HYDRO MODEL

- | | |
|----------------------|--|
| • Southern Flounder | Bridget Callahan |
| • American shad | Pres Brownell summarize existing info |
| | Bridget Callahan info on Residence time |
| | Effects of low DO |
| • Shortnose sturgeon | Pres Brownell & Mark Collins |

WRAP-UP

- Next Meeting

CESAS-PD-E

6 February 2003

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 28 January Interagency Meeting on Evaluation of Fisheries

1. Attendees:
 USFWS: Ed Eudaly
 GADNR-WRD: Matt Thomas
 Ted Will
 ATM/GPA: Bo Ellis
 Bridget Callahan
 COE: Bill Bailey

By phone:
 NMFS: Prescott Brownell
 SCDNR: Mark Collins
 Priscilla Wendt
 GADNR-CRD: Pat Geer
2. The Agenda is attached.
3. The following is a summary of the discussion and does not include all the information that was presented or all comments made during the discussion.
4. We reviewed our previous meeting and the major conclusions we reached.

We started with a **clarification of the use of the Hydro Model to determine minimum levels of dissolved oxygen (D.O.)**. We decided the information should be provided for top, mid-depth, and bottom of each grid cell in a cross-section, every 0.2 miles up the length of the river. The data should be presented both in tables and color figures. This information would be produced as an additional output of each Hydro Model application run for evaluation of impacts to fisheries.

We discussed **comments that Pres Brownell provided after the December meeting summary was finalized**. Pres suggested in his comments that we should use a range of suitability thresholds. We had much discussion on this issue of identifying the intensity of an impact on fisheries. The approach the group had agreed to follow was one that distinguishes between locations that provide suitable vs. unsuitable habitat for a particular species (or representative species). This is basically a pass/fail approach. The group concluded that if we were able to obtain more information (shades of gray rather than just black or white), it would likely not identify more areas of impact or more useful information when compared to the pass/fail approach we presently plan to use. The

group (including Pres) agreed that the pass/fail approach was acceptable for now. Pres said that his comments on including a range of suitability thresholds could be deleted from the December summary. I have attached a revised summary of the December meeting, deleting the comments that Pres said could be removed.

5. We then discussed **Southern Flounder**. Bridget reviewed the findings of the research she had found and our conclusions from the previous meeting. We discussed suitability criteria for D.O. from the HSI model. The HSI shows 4.5 mg/L as having a suitability criteria of 1.0. We recognize that the estuary supports a long-standing population of Southern flounder, while also experiencing D.O. values below 4.5 mg/L. At the conclusion of our discussion, we reconfirmed the use of the 0.7 suitability criteria for D.O., which is a value of 4.0 mg/L. We agreed that the model runs should use the following:

- Dates: August
- Temperature: Average August
- Flow: Average August
- D.O.: ≥ 4.0 mg/L as the threshold
of suitable habitat

Bridget will include these items in her write-up on this species.

6. We then discussed **Shortnose sturgeon**. We confirmed that we should look at both winter and summer conditions and that salinity and D.O. are critical water quality parameters. We again discussed a D.O. threshold, and reiterated that 4.0 mg/L appeared to be a good threshold acceptability criteria. Pres reiterated that he may consider designating an "Area of Concern" where sturgeon were found in the most recent field investigation. Bridget will take over responsibility for the write-up describing the rationale for habitat criteria we would use to identify suitable habitat in the Savannah River estuary. She will coordinate with both Pres and Mark as she prepares the document.

7. We discussed **American shad**. Bridget reviewed information that she had found. Although Billy McCord (SCDNR) had reported that juvenile American shad are present in the estuary throughout the year, he defined "estuary" as being up to River Mile 100. (For perspective, the upper end of the navigation channel is about R.M. 22, Interstate-95 is about R.M. 28, and Clio (upper end of tidal influence) is about R.M. 61.) The SCDNR and UGA efforts in the Estuarine Dependent Resources Study didn't find many juveniles in the summer. Ted will check with Cecil Jennings on his opinion of whether juvenile American shad are an important fishery in the estuary. Matt will review GADNR records for locations of juveniles in other river basins. Both will transmit their findings to Bridget. She will revise her write-up to include this information.

8. We concluded by agreeing to have documents to review prior to meeting again. Bridget is preparing the documents for the three remaining species. When she provides drafts of those documents, I will distribute them and schedule another meeting.

William Bailey

Environmental Resources Branch

SAVANNAH HARBOR EXPANSION PROJECT

INTERAGENCY FISHERIES COORDINATION

JANUARY 28, 2003

AGENDA

REVIEW OF PREVIOUS MEETING

- Identify Dissolved Oxygen levels throughout the estuary
 - Report 5 % occurrence level every 0.2 miles
 - Runs performed for every species
- Discussion on habitat suitability for four species:
 - Southern Flounder
 - Adults & juveniles; summer months; bottom layer
 - Consider 0.7 suitability threshold for D.O.
 - American shad
 - Juveniles; summer months; bottom layer; D.O ≥ 4.0 mg/l
 - Shortnose sturgeon
 - Winter & summer months
 - Separate "Area of Concern"
- Recent comments by Prescott Brownell on summary of December meeting

CONTINUE WORK ON THESE SPECIES FOR IMPACT ASSESSMENT USING HYDRO MODEL

- | | |
|----------------------|--------------------------------|
| • Southern Flounder | Bridget Callahan |
| • American shad | Bridget Callahan |
| • Shortnose sturgeon | Pres Brownell (& Mark Collins) |

WRAP-UP

- Next Meeting

CESAS-PD-E

20 December 2002

Revised

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 19 December Interagency Meeting on Evaluation of Fisheries

1. Attendees:
ATM/GPA: Bo Ellis
Bridget Callahan
COE: Bill Bailey

By phone:
USFWS: Ed Eudaly
NMFS: Prescott Brownell
SCDNR: Mark Collins

2. The Agenda is attached.

3. The following is a summary of the discussion and does not include all the information that was presented or all comments made during the discussion.

4. I reviewed our previous meeting and the major conclusions we reached. We completed our work on the Striped Bass application. We decided that no further work was needed to attempt to use the Hydrodynamic Model to the Habitat Suitability Indexes for the following species: Atlantic sturgeon; Red drum; Spotted seatrout; Blue crab; and Shrimp. We will continue work on Shortnose sturgeon; Southern flounder; and American shad.

Review of the Habitat Suitability Index models for red drum, seatrout, crab, and shrimp revealed that these models were generally not designed for use in evaluating changes in salinity or dissolved oxygen. That does not mean that those species are not affected by changes in salinity and D.O., but the models were designed to assess changes in other habitat variables. Rather than spend time developing modified models responsive to D.O. and salinity, it was realized that other species and key life stages could be employed as surrogates for the estuarine fish community. Accordingly, a focus on Shortnose sturgeon, Southern flounder, Striped bass and American shad is appropriate for initial habitat analysis employing the Hydrodynamic Model.

5. We started with a **clarification of the use of the Hydro Model to determine minimum levels of dissolved oxygen (D.O.)**. We had discussed this at our previous meeting, but I was uncertain of exactly what information we should ask the model to produce. We decided that the 5 percent occurrence values should be identified as a measure of the minimum D.O. levels in the estuary. This data should be reported every

0.2 mile along each river in the estuary. The information would not be part of the habitat suitability criteria, but would be additional information to assess the general fishery habitat conditions in the estuary under those flow conditions. At this point, we will request this information for every species that we use the Hydro Model to assist in the evaluation of project impacts.

The Hydro Model can display zones (spatial distribution) of dissolved oxygen under test scenarios. We will then be able to identify changes in area of available suitable habitat under the various test scenarios. The reporting of minimum levels of D.O., as discussed in the previous paragraph) will also allow us to identify any areas with D.O. problems that may develop under the test scenarios.

6. We then discussed **Southern Flounder**. Bridget had been somewhat unsure of what actions she needed to take. Because of the seasonal differences in their occurrence in the harbor, we agreed that the analysis should evaluate habitat for both adults and juveniles. By this decision, we substituted juveniles for larvae from the position we reached at our last meeting. This substitution is due to (1) the occurrence of juveniles in the estuary over a longer duration than larvae, and (2) the temporal overlap of adult's occurrence with that of larvae. Juveniles are present in the estuary over the spring, summer and fall months. We will evaluate the summer months, since the habitat will be most limited during that period due to the requirement for relatively higher D.O. levels. Bridget will review the HSI criteria for D.O. to determine the 0.7 suitability threshold. We expect it is around 4.0 mg/L. Unless she uncovers something to indicate that is not a good number to use, we will use 4.0 mg/L as our criteria. The location in the water column where that would be determined is at the bottom. Bridget will revise the application for this species prior to our next meeting.

7. We then discussed **American shad**. Bridget reviewed that the studies for the HSI had been conducted primarily in northern areas. As opposed to behavior in the north, it is believed that for American shad in the south, (1) adults are not repeat spawners, and (2) juveniles overwinter in the estuary. This species uses two types of habitat in the Savannah River: (1) Riverine -- spawning adults, freshwater, January to May, and (2) Estuary -- juveniles and migrating adults, emergent or submerged vegetation is important, November to March. We will consider that shad juveniles may be in the estuary at any month of the year, particularly summer months, not limited to November to March. Relatively high D.O. is needed by this species. Juveniles need >3.0 mg/L for equilibrium. In the Temporal and Spatial Distribution Study conducted in this estuary, shad were found at locations with D.O. $\geq$ 4.1 mg/l. We decided to use 4.0 mg/l as our criterion for acceptable habitat. There is no need to look further at adult habitat because they move through this harbor when the water is cooler, and therefore when the D.O. is higher. We will look at juveniles and use the following criteria: summer months; D.O. $\geq$ 4.0 mg/l; bottom layer. Bridget will revise her write-up to include our conclusions and any other information she may find from additional research.

8. We discussed **Shortnose sturgeon**. Salinity and D.O. are critical water quality parameters. In the summer, sturgeon move upriver out of the harbor. Pres indicated we may want to consider designating an "Area of Concern" where no impacts are desired. This area is just above the mouth of the Middle River, where SCDNR found sturgeon during the winter in their most recent monitoring. This designation would be separate from any habitat areas identified by the Hydro Model. He and Mark will try to identify those areas, based on the telemetry study experiences, prior to the next meeting. We agreed that we should look at both winter and summer conditions, since it is believed that these are the two seasons in which the fish are under the greatest environmental stress. Pres will document his and Mark's findings and our discussions, and prepare a paper describing the habitat criteria we could use to identify suitable habitat in the Savannah River estuary.

9. Next meeting: Preliminary date: Tuesday, January 28 starting at 9:30 AM.

William Bailey
Environmental Resources Branch

CESAS-PD-E

23 May 2003

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 21 April Interagency Meeting on Evaluation of Fisheries

1. Attendees:

USFWS:	Ed Eudaly
NMFS	Stephanie Bolden
SCDNR	Mark Collins
GADNR-CRD:	Pat Geer
COE:	Bill Bailey

By phone:
 UGA-Coop Cecil Jennings
2. The Agenda is attached.
3. The following is a summary of the discussion and does not include all the information that was presented or all comments made during the discussion.
4. We scanned the conclusions of our previous meeting and used them as a basis for discussions at this meeting.
5. We started with a discussion of the habitat suitability criteria for **Shortnose sturgeon**. I agreed to add a map to show the river miles; possibly one map for the overall river and another for the estuary. We discussed the areas of concern for this species: Juveniles in winter in mouth of Middle River; Adults in winter in Savannah River; Juveniles in summer further upstream in Savannah River. We then discussed several changes to the wording of the document. I recorded the specific recommended changes on a hard copy of the document. We agreed we wanted the DO data from only a portion of the channel cross-section. Where the Hydrodynamic Model grid is 3 cells wide, we want the deepest cell. Where the grid model has >3 cells wide, we want the deepest 2 cells.
6. We then discussed the habitat suitability criteria for **Southern flounder**. We developed several changes to document we reviewed. I recorded the specific recommended changes on a hard copy of the document.
7. We then discussed the habitat suitability criteria for **American shad**. We developed several changes to document we reviewed. I recorded the specific recommended changes on a hard copy of the document.

8. I agreed to send out revised copies of the three habitat suitability criteria we discussed to ensure I had captured all the changes. After we agree on the changes, I would send out the documents again for agency approval.

9. NOTE: I sent out the revised versions on 23 April and on 14 May I sent the final versions out for agency approval. I requested the agencies provide their positions by 6 June.

William Bailey
Environmental Resources Branch

SAVANNAH HARBOR EXPANSION PROJECT

INTERAGENCY FISHERIES COORDINATION

APRIL 21, 2003

AGENDA

REVIEW OF PREVIOUS MEETING

- Use Hydro Model to also identify Dissolved Oxygen levels when performing analyses of habitat suitability
 - Use to obtain picture of overall health of aquatic environment
 - Report 5 % occurrence level every 0.2 miles
 - Runs performed for every species
- Discussion on habitat suitability for three species:
 - Southern Flounder
 - Adults & juveniles; summer months; bottom layer
 - Consider 0.7 suitability threshold for D.O.
 - American shad
 - Juveniles; summer months; bottom layer; D.O ≥ 4.0 mg/l
 - Shortnose sturgeon
 - Winter & summer months
 - Separate "Area of Concern"
- Discussion of use of degrees of suitability
 - Joint decision to proceed with separating into GOOD or NOT GOOD, and not use intermediate degrees of suitability.

DISCUSSION OF THE WRITE-UPS FOR HABITAT SUITABILITY CRITERIA

- Shortnose sturgeon
- Southern flounder
- American shad

WRAP-UP

- Next Steps

CESAM-PD-E

5 June 2006

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 1 June Meeting of Fisheries Interagency Coordination Team

1. Attendees:
 USFWS: Ed Eudaly
 John Robinette
 Jane Griess
 NMFS: Prescott Brownell
 SC DNR: Priscilla Wendt – by phone
 GA DNR-EPD: Keith Parsons
 GA DNR-WRD: Matt Thomas
 EPA: Gerald Miller
 Ntale Kajumba
 COE: William Bailey
 Hugh Heine
 Joe Hoke
 Gary Mauldin

 Observers:
 GPA: Hope Moorer
 Larry Keegan (CH2MHill)
2. The meeting was held at the USFWS Refuge Office outside of Savannah from roughly 0900 to 1200. The meeting was an information meeting only, not a decision meeting. The Corps was not requesting concurrence from the agencies on the level of impacts predicted for the project alternatives.
3. The following is a summary of the discussion and does not include all the information that was presented or all comments made during the discussion.
4. The Corps started by reviewing the process the Team had followed to arrive at this point:
 - The Interagency Team had reviewed the fisheries found in the estuary and agreed that impacts should be identified for Striped bass, Southern flounder, American shad, and Shortnose sturgeon.
 - The Team had developed measures to define acceptable habitat for those species.
 - The intent is to use the hydraulic and water quality models to identify the amount and location of suitable and unsuitable habitat so that potential impacts of the harbor expansion project could be identified and evaluated.
 - The Corps combined the habitat requirements and provided them to the hydraulic modelers for running the hydraulic and water quality models.

- The agencies recently approved use of the hydraulic and water quality models for impact evaluation purposes on the Savannah Harbor Expansion Project.
- The modelers had completed their impact runs and prepared a report documenting their findings. The report had been sent to the Interagency Team for review. Errors in the report had been identified and revisions are needed.

5. The Corps distributed a summary it had prepared of the predicted changes in suitable fishery habitats. The summary was based on information in the report that had been updated to reflect recent corrections. The summary was not complete, as the modelers are still in the process of re-doing some runs to correct errors that had been identified since the report was distributed. The group reviewed the summary in a general way and identified the following range potential changes to habitat depending on channel depth:

Striped bass spawning	7 to 19 percent – also depending on river flow condition (high, average or drought)
Striped bass eggs	8 to 25 percent – average flow only
Striped bass larvae	13 to 21 percent – average flow only
Striped bass spawning	8 to 25 percent – average flow only
American shad (Jan)	0 percent – average flow only
American shad (May)	0 percent – average flow only
American shad (Aug)	0.4 to 2 percent – average flow only
Sturgeon adults (Jan)	4 to 7 percent – average flow only
Sturgeon adults (Aug)	6 to 10 percent – average flow only
Sturgeon juveniles	4 to 9 percent – average flow only
Southern flounder	18 to 28 percent – average flow only

6. The group then discussed the summary and impact report. A question arose on how the model was calculating habitat for Striped bass. The grid is one cell wide in the Middle River and upper Back River areas, so lateral averaging is not necessary. Except for one station, those areas are well mixed, as recently confirmed by Paul Conrads (USGS) after reviewing the field data and EFDC model results. Since rivers in the area are well mixed, the group believes that vertical averages of salinity and dissolved oxygen is acceptable for use in predicting Striped bass habitats.

There was surprise expressed that the analysis identified that areas were unsuitable as Shortnose sturgeon habitat only because of failures to meet the salinity criteria. The group had expected some areas to be unsuitable because of low dissolved oxygen conditions. The Corps said it would recheck how the model determined a cell was unsuitable for sturgeon.

A member of the Team requested that information be provided for all habitat analyses – similar to what had been done for Shortnose sturgeon – to show why cells were identified as unacceptable habitat (which criteria they failed to meet).

A member of the Team requested that an additional plot be provided for all habitat analyses to show the location of the areas predicted to be impacted by the alternative (delta plot).

A question arose on what flows were used for the analysis for Figure B.3.2. Were they August 1999 (varied flows) or Historical average flows (constant flow)? The Corps will review and confirm that constant flows were used, matching the other fishery impact runs.

A question arose on the report's prediction of identical impacts for some species in both high and low flow conditions (20 and 80 percentile flows). The Corps reiterated that those results were caused by errors in file management while the models were being run and stated that it was re-running those runs and would send the group the updated information when it becomes available.

A member of the Team requested that the information reported by the Corps contain a clearer description of the percent and percentile used in that particular analysis. The Corps acknowledged the difficulty in keeping this information straight and understandable for those who need to use the information being produced. We will attempt to clarify and better distinguish between the percentile for a parameter (such as percentile river flow from a historical cumulative frequency distribution), and percent exceedence (amount that level is exceeded at a specific location).

A member of the Team requested that information be provided on the cumulative effects of historical changes in the estuary on the habitat volumes of the four selected species. The Corps explained the cumulative impact analysis that it was conducting — using the model to differences in salinity and dissolved oxygen levels between present bathymetry and that recorded in the 1850's. The Corps said it would investigate running those results through the post-processor to determine the locations and volumes of acceptable fish habitats.

7. A member of the Team requested that the Corps develop an index of fishery information (reports, MFRs, etc.) that is important to the analyses being conducted in the SH Expansion Project. With such a list, each agency reviewer could ensure that they have a complete record of the critical documents and that they have the latest version of those documents. The Corps agreed to develop and provide such an index.

8. Except for one individual, most of the members of the team had been present the day before when the Corps presented the preliminary results of the mitigation modeling. Since most of the group had heard that information, the Corps presented the results to that individual after the main meeting was over.

9. The Corps agreed to provide revised Impact Reports to the agencies when those revisions and corrections are complete. The updated report will be provided on CD only. Agency Team members are free to send the Corps any comments they may have after further review of the present Impact Report or review of the revised report.

10. The Corps will continue its work on evaluating potential mitigation measures. When it has developed combinations of mitigation measures that it believes would be effective, the Corps will hold another meeting of the Interagency Coordination Team to share those results. That meeting would be prior to the Corps' completion of a Draft EIS or a request for agency concurrence on the acceptability of the mitigation plans or the project alternatives.

11. After the meeting Ed EuDaly (USFWS) provided an email containing the following points that he wanted to reiterate and clarify:

- I strongly suspect that the wrong salinity criteria was used for the adult sturgeon winter habitat (unless the bottom salinity impact is much higher than anticipated).
- I also suspect that the D.O. criteria used for the sturgeon may have been incorrect. This suspicion is due to the D.O. figures provided that show higher than expected minimum D.O. levels. However, it could be that inapplicable DO information was displayed and the correct information was used in the model run.
- For the baseline and mitigation runs, all maps need to use a uniform salinity scale legend. With the current maps and a sliding scale, interpretation is difficult.
- After further consideration, I believe that all baseline and mitigation runs must display surface, middle and bottom salinity. This display is necessary for a complete understanding of each modification. A great deal of effort has gone into completing the model and it should be fully utilized for decision making. Output can be provided in electronic format to reduce color reproduction cost.

// DRAFT //

William Bailey
Environment and Resources Branch

From: [Bailey, William G SAS](#)
To: ["Steven Davie"](#)
Cc: [Ed Eudaly \(E-mail\); smirn-Brownell, Prescott; Gerald Miller \(E-mail\); Jim Greenfield; Paul Conrads; Hoke, Joseph T SAS; Plachy, Douglas H SAS; Larry Keegan \(E-mail\); Yun Pli](#)
Subject: SH Expansion: EFDC and D.O. Model Inputs and Outputs for Fisheries
Date: Thursday, October 07, 2004 8:02:56 AM
Attachments: [EXPAN H and S Modeling Plan.xls](#)
[EXPAN Habitat Suitability Criteria - Flounder.doc](#)
[EXPAN Habitat Suitability Criteria - Shad.doc](#)
[EXPAN Habitat Suitability Criteria - SNS final.doc](#)
[EXPAN Habitat Suitability Criteria - Striped Bass.doc](#)

Here are the agreed upon inputs and outputs for identifying impacts to fisheries.

This is a summary table I constructed to combine the input/output information.

Here are the "source documents". They are the documents that we and the agencies used to develop and define the needed/desired input and outputs. Each document describes habitat for a different species. The model inputs and outputs are specified at the end of each document.

BB

Southern Flounder

Habitat Suitability Model Review

Prepared by: Bridget Callahan, Applied Technology and Management, Inc.;

February 20, 2003

Modified by: William Bailey, US Army Corps of Engineers

September 5, 2003

1.0 Summary

This report reviews the habitat suitability index model for the southern flounder (*Paralichthys lethostigma*) (Enge and Mulholland 1985) to determine its applicability to the Savannah River system. First, it proposes a general approach to evaluate impacts of Savannah Harbor modification on southern flounder and describes how the hydrodynamic model can be used for flounder impact assessment. Then, it describes how available information on South Atlantic Bight flounder and Savannah River populations can be applied to fine-tune the model developed for the Gulf of Mexico. Following the caveats described for model application, it identifies water quality and substrate characteristics that mark acceptable habitat for this species, and the general parameters for those characteristics that appear to be optimal and acceptable for flounder based on Enge and Mulholland (1985). Finally, it suggests model outputs and graphical products to help managers and regulators to evaluate project impacts to southern flounder from the proposed deepening.

Uncertainty in the modeling efforts is unavoidable, regardless of the work and care involved in determining suitable habitat parameters. Therefore, intense efforts to replicate the natural system may not result in better decision making because the outputs are only models. The modelers can explain where uncertainty is greatest in the outputs; however, biologists should be clear about where uncertainty lies in their understanding of southern flounder population dynamics.

This report is based on the best available information at the time. The document is developed for impact assessment purposes on projects in the Savannah River estuary and is not to be taken as the definitive work on the biology of this species.

2.0 Introduction

In order to better understand the implications of deepening the harbor on fisheries and the ecosystem, the fisheries working group would like to apply HSI models for species of concern to project alternatives. These species include striped bass, shortnose sturgeon, American shad, and southern flounder. Other species of concern include red drum, spotted seatrout, penaeid shrimp, and blue crab.

The 3-D hydrodynamic model developed by ATM will be used to predict pre- and post-project salinity, temperature, and dissolved oxygen conditions to support impact evaluation. This approach is meant to guide decision-making and evaluation of impacts by resource managers and regulators, not to substitute for the ongoing processes led by the USACE.

Habitat Suitability Model

An existing southern flounder (*Paralichthys lethostigma*) HSI (Enge and Mulholland 1985) was reviewed and found to be suitable for the Savannah River population. However, Gulf of Mexico (GOM) studies in Texas and Louisiana formed the basis for much of the model. Further, because the commercial flounder fishery in the South Atlantic Bight (SAB) is primarily from shrimp bycatch, and not a directed fishery, little information is available on populations in this region. Differences between the GOM and the SAB should be considered in any results of this HSI model/exercise and following discussions. The species are the same and there have not been subspecies identified between the marine provinces, however, the populations are geographically isolated and

significant habitat condition differences exist between the regions that may relate to life history differences and requirements.

The Enge and Mulholland (1985) model addresses water quality (temperature, salinity, dissolved oxygen, pH), depth, substrate, vegetation, and food. For the Savannah River project, impact concerns revolve around water quality, particularly salinity elevation and dissolved oxygen depression, particularly during summer months.

3.0 Life History

The factors in the HSI model can be understood better with a brief introduction to the life history requirements of southern flounder. This discussion contains substantial data from the temporal and spatial distribution studies conducted in the Savannah River estuary (Jennings and Weyers 2001, Collins et al. 2001). Those studies were performed during a moderate to severe drought. So, that data are only used as examples.

Seasonal Distribution and Habitat Use

Flounder inhabit the Savannah River in larval through adult life stages, in all seasons. However, this evaluation will focus only on the juvenile and adult life stages. They begin life during the winter in the coastal spawning areas. The larvae and juveniles make their way into the estuary in January through March using tidal currents, the Gulf Stream, and weak swimming abilities. The juveniles settle in tidal creeks and in the shallows near the brackish and salt marsh edges. The flounder leave the tidal creek habitats when they reach adult size (20 to 25 cm) and move into other benthic habitats in the estuary where they spend their first year. The following year, adult flounder move out into the ocean after a sharp drop in the fall water temperature (around September). After spawning in the ocean, they will re-enter an estuary in the spring when the water temperature rises.

SCDNR's gill net and trawl studies found the flounder in the main channel (Front River), Back River, and the South Channel at the northern end of Elba Island in March through

April (Collins et al 2002). While UGA's study found larval and juvenile fish in all seasons, most were caught in the spring and summer (unpublished data). Disparities in the total fish caught between years may hint at high variability in larval and juvenile survival, ingress, transport, etc.

Cover: Substrate Requirements

Flounder are benthic fish that spend most of their lives on or near bottom areas comprised of relatively fine sediment. Preferred habitats include soft bottom areas, vegetated or not, for adults, and shallow marsh fringe and tidal creeks for juveniles. Substrate that allows the flounder to partially bury itself is necessary for them to successfully ambush prey, however, they can change their color to match the background and better conceal themselves. The substrate should be relatively flat ($\leq 5\%$ slope) and be partially unconsolidated and fine-grained, such as sand or silt. In laboratory studies, it appears that flounder will endure sub optimal water quality conditions to remain on a preferred substrate. In a tagging and habitat use study of juvenile summer flounder in Chesapeake Bay, Kraus (1998) observed highest catch rates at sites that possessed the following qualities: moderately sloped bottom (1 to 2 degrees), salinities between 4 and 20 ppt, and located within 2 km of submerged aquatic vegetation. The influence of bottom slope was identified as a possible behavioral response, since the slopes form areas of convergence that concentrate phytoplankton, which in turn attract small fish which serve as prey for the flounder.

Prey and Predators

Prey items include grass shrimp, penaeid shrimp, mummichogs, spot, mullet, anchovies, and other fish, depending on the size of the flounder and the availability of the prey throughout the seasons. Predator information was not identified during the review; however, they are considered to be top predators (Hill 2001). Flounder are a significant predator on spot, which are plentiful in the Savannah River.

Water Quality Requirements: Salinity, Dissolved Oxygen, and Temperature

Southern flounder have a wide salinity tolerance and prefer high temperatures. Higher temperatures also spur higher oxygen consumption, however, which is important to consider during critical summer months. For fish caught in the UGA study, dissolved oxygen conditions ranged from 2.9 to 10.7 mg/L. Dissolved oxygen levels above 4.5 mg/L are considered optimal. In laboratory studies, flounder have avoided areas when the DO dropped below 3.7 mg/L.

In estuarine studies reviewed in Enge and Mulholland (1985), flounder were captured in temperatures between 5 and 35°C. In the Savannah River, flounder were caught in temperatures between 6 and 30°C (UGA unpublished data.) Laboratory studies seeking to determine optimal growth temperature found southern flounder juveniles preferred temperatures between 25 and 29°C (van Maaren et al 1999).

While juveniles and adults can tolerate salinities of 0 to 36 ppt, larvae younger than 50 days tolerate salinities as low as 5 ppt. In laboratory conditions, larvae tolerate salinity levels from 0 to 36 ppt (van Maaren et al 1999), field studies have found flounder at salinities of 0.4 ppt or greater. UGA's study found juvenile flounder in marsh edge habitats with salinities as low as 0.4 ppt. UGA found that "larvae were most abundant in oligohaline and tidal fresh water marshes in the winter, but that adults and juveniles were found along the marsh edge and tidal creeks in other salinity zones in all seasons." (Jennings and Weyers 2001). The SCDNR study caught 10 flounder ranging from 80 to 380 mm, in salinity ranging from 0.4 to 13.1 ppt, and in dissolved oxygen ranging from 2.97 to 8.64 mg/L. From a preliminary review of at the UGA data, flounder ranging in length from 17 to 284 mm were found in salinity ranging from 0.1 to 19.7 ppt.

4.0 Impact Analysis Considerations

The impact analysis will rely on a modification of the habitat suitability model which was developed for flounder larvae and juveniles. The model will be adapted by using only the critical life stages and variables that will be impacted by the proposed project and by

using site-specific data from various studies. The habitat quality for adult and juvenile life stages will be evaluated as follows.

Water Quality Considerations

The model includes a water quality component for salinity, bottom water temperature, and average minimum dissolved oxygen. For all three parameters, the water column 10 to 15 cm above bottom is the area of concern. For temperature and dissolved oxygen, the critical period season (May to August) is considered. These boundaries focus the model outputs. Adults tolerate up to full sea strength and spawn offshore. Optimal salinity for adults is given as 0 to 20 ppt. Many of the flounder captured in the study described above are small juveniles, and they were often found at salinities below 5 ppt. This may require an adjustment for juvenile life stages. Flounder are generally not found far above the estuary. Water temperature for juveniles is given as over 30° C, and it decreases as the fish grow older. From May to August, Enge and Mulholland (1985) give a 20 to 35° C range as optimal. For dissolved oxygen, 3.0 mg/L is given as the lower limit, with 4.5 mg/L and over considered optimal.

Cover and Substrate Considerations

Areas with muddy substrates are considered to have the best habitat. Enge and Mulholland (1985) do not include vegetative cover because flounder are found in vegetated and unvegetated substrates, however, tidal marsh edge and vegetated flat habitats are important for juveniles because they offer greater cover as well as prey concentrations. In order for flounder to bury partially and conceal themselves, the substrate should be partially unconsolidated. The river bottom currently has areas that are soft, especially if operations and maintenance materials settle there, as well as areas that are scoured and relatively compacted. Areas where the Miocene level is exposed may be rather compacted, for example. Channel banks or side slopes that exceed a 5 % grade are generally unsuitable for flounder.

The bottom substrate of the river may change following the proposed deepening project due both to direct impacts of dredging and to indirect impacts from a change in salinity pattern that affects sedimentation processes. The harbor generally experiences a high shoaling rate, in some areas up to one foot per month. Channel maintenance sediments

from the inner harbor are generally fine-grained silts. Even though clay areas may become exposed during a harbor deepening, the high shoaling rate would quickly cover up those areas with silty material again. After that covering has occurred, the bottom substrate exposed to flounder would be the same as it had before the deepening took place. Changes in salinity patterns may result in an upstream shift of sedimentation locations. However, we believe that this potential impact on substrate composition will not significantly affect flounder habitat in the project area.

5.0 Suitability Criteria

To display pre and post project suitable habitat for this species, the hydrodynamic model can be used to compare areas where the criteria shown below occur before and after the project under various flow scenarios at the bottom layer of the water column.

Juveniles are present in the lower estuary during the spring, summer, and fall months. For this effort, only the bottom of the water column will be considered. Their suitable dissolved oxygen would be 4.0 mg/L or greater, because 4.0 mg/L is considered the threshold for suitable habitat using a 0.7 index level rather than a 1. Adults are present during the winter when dissolved oxygen levels usually remain higher than 4.0 mg/L. It appears that salinity tolerance is so wide that it can be disregarded for this species. The I-95 Bridge is selected as the upstream boundary for this evaluation based on field experiments that found salinity exceeded 0.4 ppt downstream of that location. The entire river cross-section should be analyzed. Areas where the bottom slope exceeds 5 % do not provide suitable habitat and should be deleted from the analysis. This should be determined by using the maximum and minimum depth and width in each cell along the river bottom. No slope calculations are necessary for the bottom of the navigation channel, which is assumed to be flat.

The southern flounder habitat suitability criteria for impact evaluation purposes in the Savannah River estuary can be summarized as follows:

Life Stage	Adults	Juveniles
Time of Year	Summer	Same
Dissolved Oxygen	4.0 mg/L	Same
D.O. Exceedance	10 %	Same
Temperature	Normal August	Same
River Flow	Normal August	Same
Location – depth	Bottom layer	Same
Location – slope	≤ 5 %	Same
Location – upstream limit	I-95 Bridge	Same

6.0 Literature Cited and Selected References

Collins, M.R. 2001. Temporal and spatial distribution of estuarine dependent species in the Savannah River estuary. Year One Status Report.

Daniels, H.V. 2000. Species Profiles: Summer Flounder Species Profile. Southern Regional Aquaculture Center. Publication 726.

Enge, K. M. and Mulholland, R. 1985. Habitat Suitability Index Models: Southern and Gulf Flounders. University of Florida, Gainesville. Biological Report 82(10.92). 33 pages.

Fernandez, E. 1991. The juvenile life history of the southern flounder (*Paralichthys lethostigma*) in South Carolina. M.S. Thesis. University of Charleston, Charleston, SC.

Hill, K. 2001. Species Profile: Southern Flounder. Smithsonian Marine Research Institution, Fort Pierce, FL. Unpublished report on internet.

Jennings, C. and R. Weyers. 2001. Temporal and spatial distribution of estuarine dependent species in the Savannah River estuary. Year One Status Report.

Kraus, Richard T. 1998. Tagging and habitat utilization of juvenile summer flounder, *Paralichthys dentatus*. M.A. Thesis. College of William and Mary, Williamsburg, VA.

Murdy, E.O., R.S. Birdsong, and J.A. Musick. 1997. Fishes of the Chesapeake Bay. Smithsonian Institution Press, Washington, DC.

Reagan, R.E., Jr. and W.M. Wingo. 1985. Species profiles: Life histories and environmental requirements of coastal fishes and invertebrates (Gulf of Mexico)--Southern Flounder. U.S. Department of Interior, Fish and Wildlife Service, Biological Report 82(11.30). U.S. Army Corps of Engineers, Report TR EL-82-4. Washington, DC.

Van Maaren, C., Kita, J., Daniels, H.V. 1999. Temperature tolerance and oxygen consumption rates for juvenile southern flounder *Paralichthys lethostigma* acclimated to five different temperatures. Proceedings of the 28th Panel on Spawning and Maturation of Aquaculture Species. Published by the United States/Japan Cooperative Program in Natural Resources. Pp. 135-140.

American Shad

Habitat Suitability Model Review

Prepared by: Bridget Callahan, Applied Technology and Management, Inc.:

February 25, 2003

Modified by: William Bailey, US Army Corps of Engineers

April 23, 2003

1.0 Introduction

In order to better understand the implications of deepening the harbor on fisheries and the ecosystem, interagency coordination with natural resource agencies led to a decision to apply habitat suitability index (HSI) models for species of concern to evaluate potential impacts from project alternatives. ATM's hydrodynamic model will be used to portray suitable habitat before the proposed project and under various project alternatives. Criteria for striped bass, shortnose sturgeon, and southern flounder have been developed.

Through interagency coordination, it was decided that the HSI model for the American shad (*Alosa sapidissima*) (Stier and Crance 1985) would require modification for use in the Savannah River. This report reviews the HSI model and available unpublished and anecdotal information on shad in the Savannah River system to adjust the model for this estuary. Based on guidance from National Marine Fisheries Service, it includes special attention to dissolved oxygen and salinity tolerance, seasonal occurrence, and habitat preferences including depth, diel migration, and key bottom types. Suggestions to consider the combined effects of temperature, salinity, and dissolved oxygen could not be fulfilled due to a lack of information.

This report is based on the best available information at the time. The document is developed for impact assessment purposes on projects in the Savannah River estuary and is not to be taken as the definitive work on the biology of this species.

2.0 American Shad Life History

The American shad is a widespread anadromous species, inhabiting the Atlantic Ocean from the St. Lawrence River to the St. Johns River, and the Pacific Ocean, (where it is not native), from Cook Inlet, Alaska to Baja California. It is most abundant in colder waters and not a common species south of North Carolina; therefore, most of the research and available literature comes from the northern part of their range. Main differences between northern and southern stocks appear to include the protracted out-migration and over-wintering of juveniles, and minimal repeat spawning in southern stocks.

Shad are fast-swimming, schooling planktivorous fish. They spend most of their lives in large schools in the ocean. At 4 to 6 years of age, they return to their natal rivers to spawn. The adults typically die after spawning in the southeast; in the northern extent of their range, they may return to spawn several times. In the southeast, shad spawn far upstream in freshwater during the winter and early spring, from January to April. The semi-buoyant eggs are released in the water column, and like striped bass eggs, require enough velocity to remain suspended until hatching. Time to hatching is likely 4 to 6 days.

Larval and juvenile shad spend their first spring and summer in the river, utilizing freshwater habitats before emigrating to the ocean in the late summer and fall. In the north, outmigration is cued by water temperature. In southern rivers, however, outmigration may be dictated by individual size and availability of food in the estuary. This has led to a theory about shad out-migration called "grow and go." Studies from the Altamaha River found that juveniles leave the estuary once they have reached 90 to 100 cm (Goodwin and Adams 1969). In order to increase their fat reserves in the estuary

before leaving for the ocean, juvenile shad may spend time in the lower Savannah River during the summer when water quality is most poor. For example, the Temporal and Spatial Distribution Study (TSD Study) found many juvenile shad in the lower river during the summer.

Savannah River Shad

Little information exists on the Savannah River shad; to date, no study has focused on this species in this river. Knowledge of southern stocks derive from studies in the Ogeechee, Altamaha, and Santee-Cooper River systems (Smith 1968, Goodwin and Adams 1969, Probst 1988, Cooke and Chappellear 1994, Boltin 1999), and communications with commercial fishermen, researchers, and resource managers summarized in a literature review included as an appendix to this report (Applied Technology and Management, Inc. 2000).

The Savannah River shad population size is unknown. Trawl and gillnet catches from the TSD Study included approximately 37 larvae and juveniles and 60 adults during two years of sampling (Jennings and Weyers 2001, Collins et al. 2002). While few shad were caught in the surveys, as fast swimmers, shad may avoid the gear types used to characterize the fish community (pers. comm. Billy McCord, SCDNR). Shad are present in sufficient numbers to support a commercial fishery on the Savannah River, the season for which runs from January 1 to March 31. The low catch rate of the TSD Study does not necessarily mean a low population of shad in the river. In fact, some resource managers believe that the shad population in the river has been robust and stable for the last 20 years. However, using catch rates to estimate population levels could be misleading because the level of effort is not known (McCord, pers. comm.).

3.0 Habitat Suitability Criteria

Seasonal Distribution

Adult shad enter the river from January to May to spawn. For most, this is a one-way journey. Based on Charleston SC studies, the juveniles likely migrate out of the river from November to March, but some fish may stay through the summer to feed (McCord, pers. comm.). This may be related to food availability in nursery habitat. While not well documented, juveniles may spend the summer in the upper estuary, above RM 40, and may not be affected by any changes in salinity from the Expansion Project or recent drought. It seems unlikely that juvenile shad are in the lower estuary during the sensitive summer period, however they would require suitable habitat (temperature and dissolved oxygen) during out-migration.

Habitat Use and Preference

Shad use all areas of the water column and juveniles may concentrate at drop-offs or in deep main stem channels adjacent to sandy banks or sand bars, and do not like backwater areas, sloughs, or other low flow habitats (Godwin and Adams 1969). The adults are often captured in deep parts of the channel during shrimp trawls in Charleston, and it appears that they are negatively phototropic (McCord, pers. comm.). However, they are known rise to the surface to feed at night.

For spawning, shad can use any part of the water column but appear to prefer broad shallow flats with sufficient velocity to eliminate silt accumulation. Optimal water velocities for spawning appear to range between 30 to 91 cm/second. However, they have been observed spawning in depths to 12 m. Turbidity greater than 100 ppm appears to be a problem for larvae (Auld and Schubel 1978 in Stier and Crance 1985).

Prey and Predators

Shad are planktivorous, straining small prey through their gill rakers. Juvenile and larval shad eat small insects at the surface of the water and small crustaceans caught in the

water column. The adults eat plankton such as shrimp and other small crustaceans, and small fishes, but do not eat while migrating upriver to spawn. Stier and Crance (1985) focus on vegetation as an important habitat factor because it would be a proxy indicator of high zooplankton and other food abundance. They assign 50% cover of vegetation as the optimal level for habitat suitability.

Temperature Preference

Shad in the Savannah River are at the southern extent of their range, and most do not reside in the project area during the summer months when the temperatures are highest. Optimal water temperatures for spawning appear to lie between 14 to 20° C. For juvenile shad, optimal near bottom water temperatures range between 10 to 25° C. Temperatures below 3° and above 35° are considered unsuitable.

Dissolved Oxygen Tolerance

Shad eggs and larvae may require levels of 5.0 mg/L or more for growth, and the lethal dose necessary to kill 50% of a test population of eggs and larvae was between 2.5 and 2.9 mg/L (Bradford et al. 1966 in Stier and Crance 1985). For juveniles, some data show that they require greater than 3.0 mg/L to maintain equilibrium, while others show mortality at level of 5.0 mg/L and that such a level of dissolved oxygen would create a lethal barrier for migration (Ellis et al. 1947 in Stier and Crance 1985). In the Savannah River, all life stages (except eggs) of shad were captured during the TSD Study in dissolved oxygen levels ranging from 4 to over 9 mg/L. However, in Collins et al 2000, only four juveniles were found in waters with 4 to 5 mg/L of dissolved oxygen, and only one was found in waters containing 5 to 6 mg/L. No information was available on synergistic effects of dissolved oxygen depression and high temperatures; however, such data would be relevant for Savannah River concerns.

Salinity Preference

Shad are tolerant of a wide range in salinity. However, they require a period of adaptation when entering freshwater from the ocean that takes approximately 2 to 3 days (Dodson et al. 1972 Leggett 1976 in Stier and Crance 1985). Although they begin life in

freshwater, the eggs and larvae are also very tolerant of salinity up to 15 ppt (Leim 1924 in Stier and Crance 1985).

4.0 Impact Analysis Considerations

The project concerns revolve around water quality, particularly salinity elevation and dissolved oxygen depression, particularly during summer months. Review of the existing American shad HSI (Stier and Crance 1985) found it suitable for the Savannah River population. Differences between the northern populations and the southern extreme ranging populations should be considered in any results of this HSI model/exercise and following discussions.

In regards to potential effects on dissolved oxygen and salinity from the proposed project shad appear to be most sensitive to dissolved oxygen. However, their wide salinity tolerance may allow them to access areas of the river with higher dissolved oxygen that fish such as sturgeon, which have a narrower tolerance for salinity, would not find suitable. Synergistic effects of dissolved oxygen and temperature may also be more important in the Savannah River due to increased stress and metabolic requirements from high temperatures and low dissolved oxygen. If unfavorable conditions prevailed during the critical summer months, shad may outmigrate to the ocean. Conversely, if the young of the year can put on the required weight and are not of sufficient size to survive ocean life then they may remain in the food-rich estuary until they are physiologically prepared for this transition.

Suitability Criteria

The most important habitat for this species in the estuary that could be affected by the Expansion Project is that used by outmigrating juveniles. This outmigration could occur at any time of year. For impact evaluation purposes for this estuary, the habitat would be considered suitable when the following conditions are met:

Life Stage	Juveniles	Juveniles	Juveniles
Time of Year	Spring	Summer	Winter
Dissolved Oxygen	4.0 mg/L	Same	Same
D.O. Exceedance	10 %	Same	Same
Temperature	Normal May	Normal August	Normal January
River Flow	Normal May	Normal August	Normal January
Location – depth	Top half of water column	Same	Same

5.0 Literature Cited and Selected References

Boltin, W.R. 1999. New Savannah Bluff Lock and Dam American Shad Mark/Recapture Report, April 1999 to July 1999. South Carolina Department of Natural Resources. Wildlife and Freshwater Fisheries Section. Abbeville, South Carolina.

Collins, M.R. 2002. Temporal and spatial distribution of estuarine dependent species in the Savannah River estuary. Final Report.

Cooke, D.W. and S.J. Chappelle. 1994. Santee-Cooper Blueback Herring Studies, Rediversion Project, Annual Report, January 16, 1994 to September 30, 1994. South Carolina Department of Natural Resources. Division of Wildlife and Freshwater Fisheries.

Godwin, W.F. and Adams, J.G. 1969. Young clupeids of the Altamaha River, Georgia. Georgia Game and Fish Division. Marine Fisheries Division. Brunswick, Georgia.

Jennings, C.A. and R.S. Weyers. 2001. Temporal and spatial distribution of estuarine dependent species in the Savannah River estuary. Year One Status Report.

MacKenzie, C., L.S. Weiss-Glanz, and J.R. Moring. 1985. Species profiles: life histories and environmental requirements of coastal fishes and invertebrates (mid-Atlantic)—American shad. U.S. Fish Wildlife Service Biological Report 82(11.37). US Army Corps of Engineers TR EL-82-4. 18 pp.

Michaels, R.A. 1990. Population dynamics of American shad in the Altamaha River. Interim report for the years 1982-1987. Georgia Department of Natural Resources. Game and Fish Division. Atlanta Georgia.

Probst, W. 1988. Evaluation of Successive Year Class Strength of Juvenile American Shad in the Ogeechee River. Georgia Department of Natural Resources. Game and Fish Division. Atlanta Georgia.

Smith, L.D. 1968. Notes on the Distribution, Relative Abundance and growth of Juvenile Anadromous Fish in the Altamaha River System Georgia with Specific Reference to Striped Bass. Georgia Game and Fish Commission. Sport Fisheries Division. Brunswick, Georgia.

Stier, D.J. and J.H. Crance. 1985. Habitat suitability index models and instream flow suitability curves: American shad. US Fish and Wildlife Service Biological Report 82(10.88) 34 pp.

Shortnose Sturgeon

Habitat Suitability Model Review

Summarized by: Bridget Callahan, Applied Technology and Management, Inc.
March 14, 2003

Modified by: William Bailey, US Army Corps of Engineers
October 31, 2003

1.0 Introduction

The shortnose sturgeon (*Acipenser brevirostrum*) was federally listed as an endangered species in 1967. This smallest of sturgeons is long lived, and reaches sexual maturity at 3 (for males) and 6 years of age (for females) in southern populations. Its populations have dwindled due to habitat loss, pollution, and fishing mortality from by-catch (especially in shad gill nets) and poaching for its valuable roe. Unlike other anadromous species, such as American shad, shortnose sturgeon do not spend much time in the ocean. They spend most of their lives near the bottom of fresh and brackish rivers and estuaries, a habitat that is vulnerable to water quality degradation and other impacts. Damming rivers has been particularly devastating, because, like some salmon species, it spawns in the upper reaches of its natal rivers.

Identifying potential impacts to the shortnose sturgeon due to the Savannah Harbor Expansion Project is more complicated in a regulatory sense than for the other species (striped bass, southern flounder, American shad). Endangered status requires compliance with the ESA and specific consultation procedures. The Expansion Project raised concerns about this fish because it is endangered and because it spends much of its life in the interface between fresh and saltwater, where potential project impacts to salinity and dissolved oxygen may occur. As a result of interagency coordination on fisheries for this project, the habitat suitability index (HSI) developed for this species (Crance 1986) was considered less than useful for the Savannah River. The HSI focuses on temperature,

velocity, and substrate and the effects these variables have on summer habitat and spawning and incubation. Because these variables are not expected to be affected by the Expansion Project, or the activity occurs outside the project effect area (spawning), the scientists agreed to develop site-specific criteria for suitable estuarine habitat.

Based on guidance from the National Marine Fisheries Service, this report describes general population status, range, habitat requirements, existing habitat models, and environmental variables applicable to the Savannah River estuary, including temperature, dissolved oxygen, and salinity. This information will help identify suitable habitat areas before and after the Expansion Project.

The information and ideas presented in this report are the result of a literature review and consultation with personnel at the South Carolina Department of Natural Resources and the National Marine Fisheries Service. This report does not synthesize the available literature on this population, and review of Habitat Use and Movements of Juvenile Shortnose Sturgeon in the Savannah River, Georgia-South Carolina (Collins et al. 2002) is strongly suggested for more background.

This report is based on the best available information at the time. The document is developed for impact assessment purposes on projects in the Savannah River estuary and is not to be taken as the definitive work on the biology of this species.

2.0 Population Status

Shortnose sturgeon live in the main stems of coastal rivers from the Saint John River in New Brunswick, Canada to the St. Johns River in Florida. Because they do not generally migrate between river systems, each one is considered a "population segment." However, they do sometimes exhibit coastal movement. Fish from the most northerly populations use saline estuarine waters more than fish from southern populations, while fish from mid-Atlantic populations use saline waters the least (Kynard 1997). This behavior

suggests a variable degree of reproductive isolation of riverine populations by region. A recent genetic study (Wirgin et al, in press) concludes that the present Savannah River population can be considered genetically distinct from those found in the nearby Ogeechee River. Another recent genetic investigation (Quattro et al., 2002) determined that the Savannah River fish were most closely related to the Edisto River fish, and confirmed that fish from the Savannah and Ogeechee Rivers were genetically distinct. Figure 1 from Quattro shows that relationship. However, it should be noted that there is a dominant SE haplotype that is found in many of the fish from the SE that complicates the analysis. Hatchery-reared offspring were used to restock the Savannah River from 1987 to 1992. Recent evidence indicates that a moderate percentage of hatchery-reared offspring have moved into other nearby rivers in the southeastern U.S., including the Ogeechee River, GA (Smith et al. 2002), perhaps compromising the genetic integrity of recipient populations. Southeastern populations face threats such as habitat loss and water quality degradation, and all *natural* populations are below the critical level of 1000 individuals (Kynard 1987).

Shortnose sturgeon populations in Georgia include the Savannah, Altamaha, Satilla and Ogeechee Rivers. The Altamaha River population appears to be the largest and healthiest of those south of Cape Hatteras (NMFS 1998). Exact population sizes are unknown for Savannah, but stocking efforts put approximately 97,000 hatchery-reared juveniles in the river between 1984-1992 (Smith and Jenkins 1991), allowing the population to reach an estimated size of over 1600 (Ted Smith, personal communication, in Kynard 1997). However, high adult to juvenile ratios indicate low recruitment and an artificially elevated adult population from stocking (Collins and Smith 1993, Collins et al. 2002). Studies in the nearby Ogeechee River also indicate low juvenile abundance compared with adults (Weber 1996).

**GENETIC SIMILARITY OF
GA & SC SHORTNOSE STURGEON**

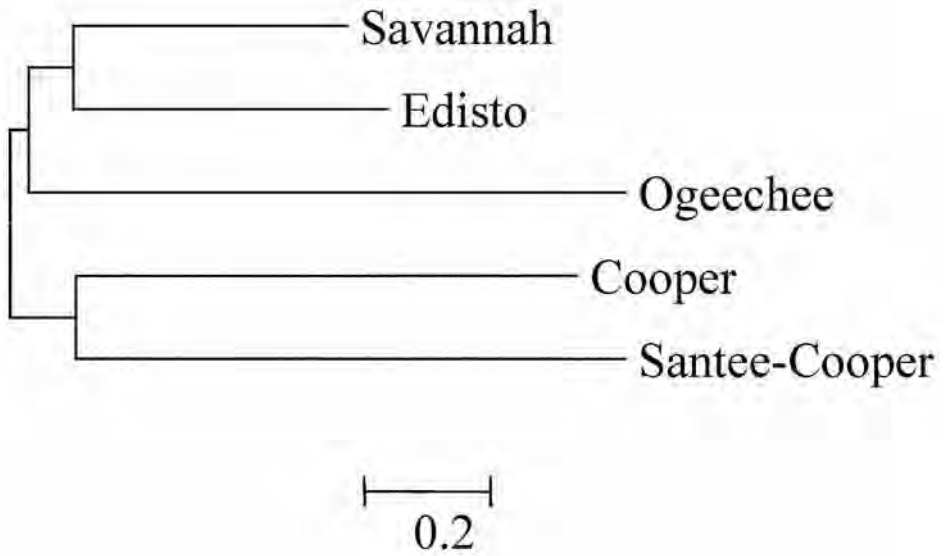


Figure 1

3.0 Seasonal Distribution and Habitat Requirements by Life Stage

Researchers from the South Carolina Department of Natural Resources (SCDNR) have been conducting research on Savannah River shortnose sturgeon since 1985. Experiments with hatchery raised sturgeon and field studies conducted by Mark Collins, Wayne Hall, Wally Jenkins, Bill Post, Ted Smith, and others provided most of the following information. Please see the Literature Cited and Selected References for helpful reports and publications.

Spawning Life Stage

As with most fish, southern populations of shortnose sturgeon mature earlier than northern ones: females reach sexual maturity at approximately 6 years, and males reach it at 3 years. In early February to late March, shortnose sturgeon spawn far upstream in freshwater. In most population segments, sturgeon spawn at the uppermost river reaches that are accessible. Damming rivers has blocked passage to many spawning grounds as a result; fortunately, the Savannah River is not dammed until just below the fall line. Hall et al. (1991) identified potential spawning sites at river kilometer (RKM) 179 to 190 and 275 to 278 (see Figure 2). Spawning habitat is well upstream of the project influence, in channels and curves in gravel sand, and log substrate in the Savannah River (Hall et al. 1991). Other suitable substrates include riffles near limestone bluffs with gravel to boulder-sized substrate (Rogers and Weber 1995). Spawning lasts for about 3 weeks, beginning when water temperatures are at about 8 to 9° C, and ending when it reaches approximately 12 to 15° C. The spent fish migrate downriver from March to May, and spend the summer from June to December in the lower river (Hall et al. 1991). Females likely do not spawn every year, while males may do so.

Adult Life Stage

Adult shortnose sturgeon migrate extensively through the river system. Observations indicate that they seek relatively deep, cool holes upriver for sanctuary from warm temperatures (and possibly to escape low dissolved oxygen coupled with salinity stress), and in the winter, they migrate downstream to the estuary, perhaps to feed or escape extreme cold.

In 1999 and 2000, Collins et al. (2001) tracked adult and juvenile sturgeon in the Savannah River and identified distinct summer and winter habitats in terms of location and water quality (Table 1). Therefore, through the interagency coordination on fisheries, it was agreed decided to divide habitat requirements into winter and summer needs. When temperatures are less than 22° C, it appears that both adult and juvenile sturgeon stay in the lower river, particularly around RKM 31, where the Middle and Front Rivers meet (Figure 2). During warmer periods when temperatures exceed 22° C, their telemetry observations and gill net surveys indicated that sturgeon use the upper estuary, especially the area around RKM 47. When the fish were observed in this upper area, the salinity was very low: 0.1 parts per thousand (ppt).

Table 1. Mean water temperature, salinity, and dissolved oxygen (D.O.) by season at locations where adult shortnose sturgeon were found. Reproduced from Collins et al. 2001.

Season	°C	Salinity (ppt)	D.O. (mg/L)
Spring	19.9	1.4	7.84
Summer	27.3	2.0	6.36
Fall	21.1	3.3	7.06
Winter	12.3	5.4	8.36

The adult sturgeon tagged by Collins et al. (2001) were also tracked as far downstream as the river's mouth. They can be very mobile, provided the temperatures are not stressfully high. While they are known to occur in 4 to 33° C, sturgeon show signs of stress at temperatures above 28°, and this stress may be exacerbated by low dissolved oxygen conditions during summer critical months. We believe that sturgeon seek thermal refuges

during these periods, deep cool waters where salinity conditions are appropriate and food is available with minimal foraging movements. For example, Floumoy et al. (1992) found that sturgeon may use spring-fed areas for summer habitat in the Altamaha River system. The synergistic effects of high temperatures and low dissolved oxygen should be considered in any impact analysis. Based on work done in the Chesapeake Bay, sturgeon may suffer an "oxygen squeeze" in the summer when they seek deep cool areas that also have low dissolved oxygen (Secor and Niklitschek, 2001).

Juvenile Life Stage

Juvenile shortnose sturgeon mature at approximately 3 to 6 years of age, and they live in the salt/fresh interface in most rivers. After spending their first year in the upper freshwater reaches, they adopt the adult migratory lifestyle and go upriver in the summer and down in the winter. Like adults, they need sand or mud substrate for foraging (Hall et al. 1991). They are less tolerant of low dissolved oxygen and high salinity than the adults and appear to migrate accordingly within the river system. For example, when temperatures exceeded 22° C in the Savannah River, they spend the summer in deep (5 to 7 m) holes with 0 to 1 ppt salinity levels (Collins et al. 2001 see Table 2). During the winter, they use the warmer estuarine-influenced lower river. For example, they move into more saline areas (0 to 16 ppt) when temperatures dropped below 16° C in the Ogeechee River. Warm summer temperatures over 26° limit movement of juveniles who may not be able to forage extensively during summers.

Table 2. Mean water temperature, salinity, and dissolved oxygen by season at locations where juvenile shortnose sturgeon were found. Reproduced from Collins et al. 2001.

Season	°C	Salinity	D.O.
Spring	20.4	2.4	7.58
Summer	28.5	0.3	6.8
Fall	21.7	4.7	6.45
Winter	12.5	8.6	8.63

Tolerance to both dissolved oxygen and salinity is thought to increase with age; very young sturgeon are known to be extremely sensitive to both (Jenkins et al., 1993). For example, Jenkins et al (1993) reported that in a 6-hour test, fish 64 days old exhibited

86% mortality when exposed to dissolved oxygen concentrations of 2.5 mg/L. However, sturgeon >100 days old were able to tolerate concentrations of 2.5 mg/L with <20% mortality. Jenkins also reported that dissolved oxygen at less than 3 mg/L causes changes in sturgeon behavior: fish hold still and pump water over their gills, an apparent adaptation to survive low dissolved oxygen conditions. If fish spawn in the spring, it is believed that late age 0 individuals encounter these low dissolved oxygen conditions in the lower estuary. EPA (Chesapeake Bay Program Office) recently revised its D.O. criteria for living resources in Chesapeake Bay tributaries from 2.0 mg/L to 3.5 mg/L to be protective of sturgeons. This was based on work done by Secor and Gunderson 1998 and Niklitschek and Secor 2000 for the Chesapeake Bay, a colder environment. It is possible that 3.5 mg/L may be acceptable, but 4.0 mg/L would be safer for the higher temperatures in this southern river. As with adults, temperatures above 28° reduce tolerance to low dissolved oxygen (Flournoy et al. 1992).

Egg and Larval Life Stages

The demersal, adhesive eggs hatch in freshwater, and develop into larvae within 9 to 12 days. Larvae start swimming and initiate their slow downstream migrations at about 20 mm in length. It is generally agreed that shortnose sturgeon larvae are not in the project impact area. No shortnose sturgeon larvae (including ichthyoplankton and ichthyofauna) were found in a recent 2-year study in the Savannah River estuary ("Temporal and Spatial Distribution of Estuarine-Dependent Species in the Savannah River Estuary" conducted by UGA, in press). However, an Atlantic sturgeon (*A. oxyrinchus*) larva was found at approximately RKM 41 during a recent ichthyoplankton study (Reinert et al. 1998). The maintained harbor extends up to RKM 34.3.

4.0 Prey and Predators

Soft sediments with abundant prey items such as macroinvertebrates are thought to be preferred by shortnose sturgeon for foraging, so established benthic communities are

likely important. They are thought to forage for small epifaunal and infaunal organisms over gravel and mud by sucking up food. A few prey studies have been conducted and prey include small crustaceans, polychaetes, insects, and mollusks. Sturgeon forage by slowly swimming along the bottom, lightly dragging their barbels until they feel something that may resemble food at which time they suck it up in their protrusible mouths. The non-food items are expelled through their gills. Juveniles may be even more indiscriminate, and just vacuum their way across the bottom.

The HSI for shortnose sturgeon addresses food availability as a major habitat criterion. The hydrodynamic model does not contain any data on this matter, nor does a substrate map exist in readily adaptable format, so through the interagency coordination, it was decided to omit this parameter from evaluation.

5.0 Suitability Criteria

Previous efforts for striped bass, American shad, and southern flounder established a threshold level for salinity and/or dissolved oxygen so that suitable habitat could be displayed before and after the proposed project. For shortnose sturgeon, this effort is complicated by the interactions between salinity, dissolved oxygen, and temperature for the juvenile and adult life stages, as well as their migration patterns.

Based on the known effects of dissolved oxygen, temperature, and salinity during the critical summer months, a safe threshold for suitable habitat appears to be approximately 4.0 mg/L in the bottom meter of the water column when temperatures exceed 26°, and 3.5 mg/L when they do not exceed that temperature threshold. While Chesapeake Bay established 3.5 mg/L as acceptable in a similar effort, the synergistic effects of high temperatures and low dissolved oxygen found in the Savannah estuary should be incorporated in some manner. While sturgeon can survive in lower oxygen levels, that level may not meet the definition of good habitat and the fish is likely being stressed. In

addition, prolonged exposure to these lower oxygen levels may not produce acute impacts to fish health, but would result in extended periods of stress that would likely result in chronic or delayed complications to fish health that could influence condition, reproduction or survival.

Salinity criteria are more complicated due to the migration patterns of sturgeon and various tolerance levels by life stage. For juveniles at age 1, salinity levels between 0 and 4 ppt could be considered suitable habitat. For adults, salinity from 0 to 17 ppt could be considered appropriate. However, for both juveniles and adults, salinity tolerances are likely related to temperature.

During the winters of 1999-2000, juvenile shortnose sturgeon consistently utilized a deep hole in Middle River near the confluence with the Front River. These juveniles enter and exit the Middle River area through its connection with the Front River. Therefore, predicted impacts in that area and also to the migratory pathway in the Front River should be carefully considered when interpreting the results of the habitat suitability analysis.

The shortnose sturgeon habitat suitability criteria for impact evaluation purposes in the Savannah River estuary are summarized in Table 3 on the following page.

Table 3. Summary of shortnose sturgeon habitat suitability criteria in the Savannah River Estuary

Life Stage	Adults	Adults	Juveniles
Time of Year	Winter	Summer	Winter
Salinity	≤ 25 ppt	≤ 10 ppt	≤ 4 ppt
D.O. Exceedance	10 %	Same	Same
Dissolved Oxygen	3.5 mg/L	4.0 mg/L	3.5 mg/L
D.O. Exceedance	5 %	Same	Same
Dissolved Oxygen	3.0 mg/L	3.0 mg/L	3.0 mg/L
D.O. Exceedance	1 %	Same	Same
Dissolved Oxygen	2.0 mg/L	2.0 mg/L	2.0 mg/L
Temperature	Normal January	Normal August	Normal January
River Flow	Normal January	Normal August	Normal January
Location – depth	Bottom layer	Same	Same
Location – width	Where Hydrodynamic Model is 3 cells wide, use deepest cell; where >3 cells wide, use deepest 2 cells	Same	Same

Model outputs would also include the following:

1. Identification of why cells at a given location were determined to have unsuitable habitat; whether they failed the salinity or the Dissolved Oxygen criteria.
2. Displaying the 1%, 5% and 10 % D.O. contours on a map.
3. On the maps that show the suitable habitat for sturgeon in the Existing or Without Project Condition, display the locations of where sturgeon were found (by age and season) in the Collins et al 2002 study.

6.0 Other Recommendations

The Shortnose Sturgeon Recovery Team (NMFS 1998) notes that sturgeon essential habitat can be easily portrayed in GIS format. Putting the data into a GIS database to share with the natural resource agencies and other interest groups may be helpful for visualizing the sturgeon's migrations and habitat needs. For example, SCDNR has suggested showing the conditions at the Middle River nursery area during the times the sturgeon are there and displaying what the conditions would be like after the Expansion Project to assess changes to potential nursery habitat.

Graphically documenting important habitat areas would make a practical addition to the decision-making support system. National Marine Fisheries Service has recommended designating "Areas of Concern" that may serve as important habitat, for example, the confluence of the Middle and Front Rivers where juveniles occupied a deep hole during the winters of 1999-2000. Efforts towards establishing such areas should consider that persistence of these sites under a range of flow conditions is unknown and use by sturgeon may change from year to year. For example, Hall et al. (1991) noted that

juvenile Atlantic and shortnose sturgeon used the Kings Island Turning Basin in 1985-1987; however, none were captured there during 1999-2000 (Collins et al. 2002).

7.0 Literature Cited and Selected References

Collins, M.R., and Smith, T.I.J. 1993. Characteristics of the adult segment of the Savannah River population of shortnose sturgeon. Proceedings of the Annual Conference of the Southeastern Association of Fish and Wildlife Agencies. 47:485-491.

Collins, M.R. and T.J. Smith. 1997. Distribution of shortnose (*Acipenser brevirostrum*) and Atlantic (*A. oxyrinchus oxyrinchus*) sturgeons in South Carolina. North American Journal of Fisheries Management. 16:24-29. (* in NMFS 1998.)

Collins, M.R., Rogers, S.G., Smith, T.I.J., and M.L. Moser. 2000. Primary factors affecting sturgeon populations in the southeastern United States: Fishing mortality and degradation of essential habitats. Bulletin of Marine Science. 66:917-928.

Collins, M.R., Post, W.C., and Russ, D. 2001. Distribution of shortnose sturgeon in the lower Savannah River: Results of research from 1999-2000. Final Report to Georgia Ports Authority. 21 pp plus appendices.

Collins, M.R., Post, W.C., Russ, D., and T. Smith. 2002. Habitat Use and Movements of Juvenile Shortnose Sturgeon in the Savannah River, Georgia/South Carolina. Transactions of the American Fisheries Society 131:975-979.

Crance, J.H. 1986. Habitat suitability models and instream flow suitability curves: shortnose sturgeon. USFWS Biological Report 82 (10.129) 31 pp.

Environmental Protection Agency, Region III. 2003. Biological Evaluation for the Issuance of Ambient Water Quality Criteria for Dissolved Oxygen, Water Clarity, and Chlorophyll a for the Chesapeake Bay and its Tidal Tributaries. Chesapeake Bay Program Office. 56 pp.

Flournoy, P.H., S.G. Rogers, and P.S. Crawford. 1992. Restoration of shortnose sturgeon in the Altamaha River, Georgia. Final Report to the US Fish and Wildlife Service, Atlanta, Georgia. (*in NMFS 1998.)

Hall, J. Wayne, Smith, Theodore I.J., Lamprecht, Scott D. 1991. Movements and habitats of shortnose sturgeon, *Acipenser brevirostrum* in the Savannah River. Copeia (3):695-702.

Jenkins, W.E., T.I.J. Smith, L.D. Heyward, and D.M. Knott. 1993. Tolerance of shortnose sturgeon *Acipenser brevirostrum* to different salinity and DO concentrations. Proceedings of the Annual Conference of the Southeastern Association of Fish and Wildlife Agencies. 476-484.

Kynard, B. 1997. Life history, latitudinal patterns, and status of the shortnose sturgeon, *Acipenser brevirostrum*. Environmental Biology of Fishes. 48:39-334.

National Marine Fisheries Service Shortnose Sturgeon Recovery Team. 1998. Recovery Plan for the Shortnose Sturgeon (*Acipenser brevirostrum*). NOAA, Silver Spring, MD. 104 pp.

Quattro, J.M., T.W. Greig, D.K. Coykendall, B.W. Bowen, and J.D. Baldwin. 2002. Genetic issues in aquatic species management: The shortnose sturgeon (*Acipenser brevirostrum*) in the southeastern United States. *Cons. Genet.* 3: 155-166.

Reinert, T.R., K.L. Jefferson and C.A. Jennings. 1998. Abundance and distribution of striped bass eggs and larvae in the Savannah River Estuary – Implications for the channel dredging window. Final Report prepared for the U.S. Army Corps of Engineers, Savannah District. 87 pp + appendices.

Rogers, S.G., and W. Weber. 1994. Occurrence of shortnose sturgeon (*Acipenser brevirostrum*) in the Ogeechee-Canoochee river system, Georgia, during summer of 1993. Final Report of the US Army to the Nature Conservancy of Georgia. (* in NMFS 1998)

Secor, D.J. and E.J. Niklitschek. 2002. Sensitivity of sturgeons to environmental hypoxia: A review of physiological and ecological evidence. In: Fish Physiology, Toxicology, and Water Quality .Proceedings of the Sixth International Symposium, La Paz, MX, 22-26 Jan. 2001. U.S. Environmental Protection Agency Office of Research and Development, Ecosystems Research Division, Athens, GA.

Smith, T.I.J. and W.E. Jenkins. 1991. Development of a shortnose sturgeon, *Acipenser brevirostrum*, stock enhancement program in North America. Pages 329-336 in: E.Williot, editor. Centre National du Machinisme Agricole du Genie Rural des Eaux et des Froets (CEMAGREF). (* in NMFS 1998.)

Smith, T., Heyward, L., Jenkins, W. and Collins, M. 1992. Culture and Stock Enhancement of Shortnose Sturgeon *Acipenser brevirostrum*, in the Southern United States. *Contribution No. 326 for South Carolina Marine Resources Center.*

Smith, T.I.J., M.R. Collins. 1996. Shortnose sturgeon stocking success in the Savannah River. *Proceedings of the Annual Conference of the Southeastern Association of Fish and Wildlife Agencies* 50:112-121.

Smith, T.I.J., Collins, M.R., Post, W.C., and J.W. McCord. In press. Stock enhancement of shortnose sturgeon: a case study. *Transactions of the American Fisheries Society.*

Weber, W. 1996. Population size and habitat use of shortnose sturgeon, *Acipenser brevirostrum*, in the Ogeechee River System, Georgia. Masters Thesis, University of Georgia, Athens, Georgia.

Wirgin, I.; Grunwald, C.; Carlson, E.; Stabile, J.; Waldman, J. 2003. Range-Wide Population Structure of Shortnose Sturgeon (*Acipenser brevirostrum*) Using Mitochondrial DNA Control Region Sequence Analysis (In press).

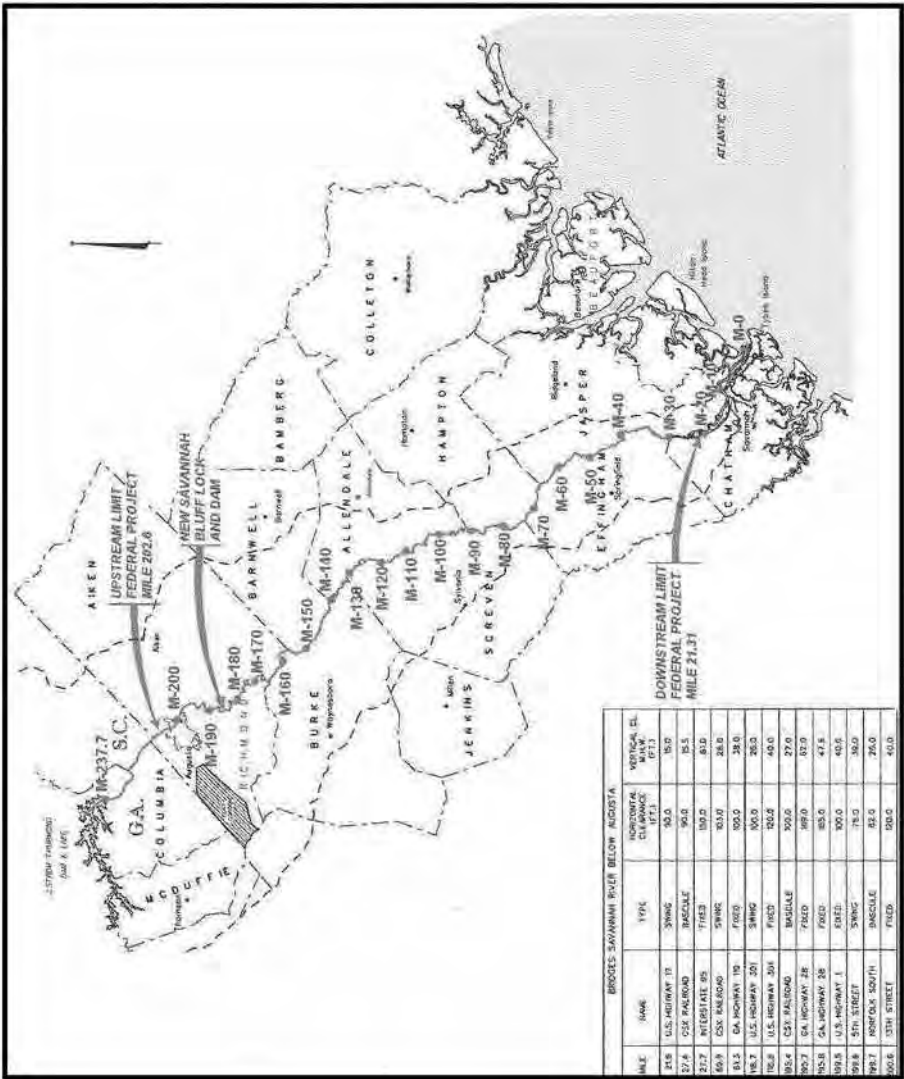


Figure 2

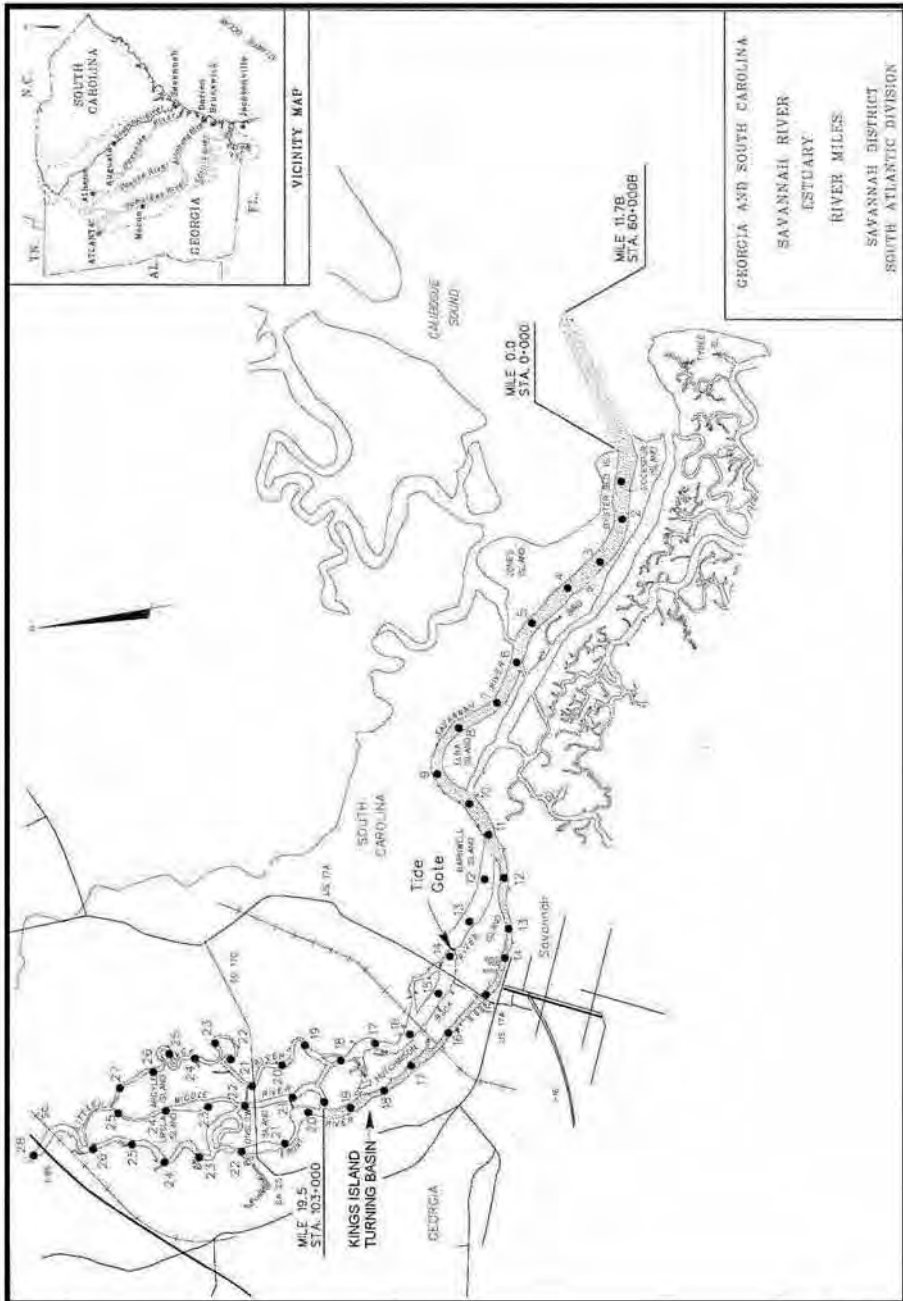


Figure 3

Striped Bass Application

Version 6

Prepared by: Ed EuDaly, US Fish and Wildlife Service

Reviewed by: Ted Will, GA Department of Natural Resources

Date: September 18, 2002

Purpose: This document proposes a method to evaluate striped bass impacts of Savannah Harbor modification and describes how the hydrodynamic model can be used for striped bass impact assessment. For the purposes of this analysis, I assumed that the hydrodynamic model and water quality model will be improved and verified to produce accurate chemical and physical predictions.

Impact Analysis

The impact analysis will rely on a modification of the habitat suitability model for coastal stocks of striped bass (Bain and Bain 1982). The model will be modified by using only the critical life stages and variables that will be impacted by the proposed project and by using site specific data from various studies. The habitat quality for various life stages will be evaluated as follows.

(I) SPAWNING:

The habitat suitability model for striped bass indicates that a maximum salinity of 1.5 ppt or less is optimal for spawning (Bain and Bain 1982). Studies on the Savannah River indicate that striped bass almost exclusively spawn in areas where maximum salinity near the surface is less than one ppt (Van Den Avyle et al 1990, Reinert and Jennings 1998, Will et al 2000). In addition, the habitat suitability model for striped bass indicates that a mean current velocity of 30 cm/s or more is needed to keep eggs suspended in the water column and allow normal development (Bain and Bain 1982). Therefore, we assume that this mean velocity is needed for suitable spawning habitat. In the Savannah River the spawning and egg development period occurs from about March 16 - May 7. By using April flow data for the evaluation, the bulk of the spawning season will be covered and the extremes at either end of the season will be eliminated. The result should be representative of average spawning season conditions.

Suitable reaches will contain the following variables:

- a) 90th percentile salinity $\leq$ 1 ppt.
- b) Mean velocity $\geq$ 30 cm/s.

Areas not meeting these criteria will be considered unsuitable (value 0)

Run Conditions

Geometry: Current baseline conditions and two-foot deepening increments up to 48 ft nominal channel depth, and mitigation features.

Discharge/Tides: We need to evaluate a range of representative flows to cover drought, average and high flow conditions. Therefore, we recommend using the 20% percentile, 50% percentile and 80% percentile levels for April based on the USGS Clio gauge data from 1955 (Thurmond Reservoir was completed in July 1954) to 2002.

Daily tidal conditions and daily temperature input should be based on April data.

Output

Salinity - Recordings should be taken of the entire tidal cycle for the April period. During the model run, salinity should be recorded every ten minutes for each cell. The 90th percentile for the 1st layer (surface) for all ten minute intervals should be recorded and laterally averaged across the channel.

Velocity - Recordings should be taken every ten minutes over both ebb and flood tides. Velocity should be recorded for the surface layer and laterally averaged across the channel.

Tables and Figures

- 1) Tables for all Back River, all Middle River and Front River from river mile 10 to 31 showing the salinity and velocity output at 0.1 river mile intervals at each discharge.
- 2) Salinity output vs river mile at each discharge.
- 3) Velocity output vs river mile at each discharge.

Figures showing suitable and unsuitable habitat will be produced after analysis of the tables and figures.

(II) EGG DEVELOPMENT

The habitat suitability model for striped bass indicates that a mean current velocity of 30 cm/s or more is needed to keep eggs suspended in the water column and allow normal development (Bain and Bain 1982). The habitat suitability model also indicates that a minimum dissolved oxygen level of five (5.0) mg/l or more is optimal for larval development and that habitat suitability decreases rapidly and becomes unsuitable at about three (3.0) mg/l (Bain and Bain 1982). Winger and Lasier (1989) concluded that exposure to salinity greater than 15 ppt was toxic to Savannah River striped bass eggs. However, the eggs will develop into larvae within about two days of spawning. Winger and Lasier (1989) concluded, using laboratory studies at a constant salinity, that Savannah River striped bass larvae survived well at three (3.0) to nine (9.0) ppt

salinity but survival decreased at higher salinity. Five day old larvae were able to tolerate higher salinity than two day old larvae. Therefore, we believe that suitable egg habitat will have a mean salinity of nine (9.0) ppt or less. In the Savannah River the spawning and egg development period occurs from about March 16 - May 7. By using April flow data for the evaluation, the bulk of the spawning season will be covered and the extremes at either end of the season will be eliminated. The result should be representative of average spawning season conditions.

Suitable reaches will contain the following variables:

- a) Mean 50th percentile salinity ≤ 9 ppt
- b) Mean velocity ≥ 30 cm/s.
- c) 10th percentile D.O. ≥ 4.5 mg/l

Areas not meeting these criteria will be considered unsuitable.

Run Conditions

Geometry: Current baseline conditions and two-foot deepening increments up to 48 ft nominal channel depth, and mitigation features.

Discharge/Tides: We need to evaluate a range of representative flows to cover drought, average and high flow conditions. Therefore, we recommend using the 20% percentile, 50% percentile and 80% percentile levels for April based on the USGS Clio gauge data from 1955 to 2002.

Daily tidal conditions and daily temperature input should be based on April data.

Output

Salinity - Recordings should be taken every ten minutes of the entire tidal cycle for the April period. The mean of the 50th percentile for the 1st layer (surface), 6th layer (mid-depth), and 11th layer (bottom), laterally averaged across the channel, should be reported.

Velocity - Recordings should be taken every ten minutes of the entire tidal cycle for the April period. The mean velocity for the 1st layer (surface), 6th layer (mid-depth), and 11th layer (bottom), laterally averaged across the channel, should be reported.

Dissolved Oxygen - Recording should be taken every ten minutes over both ebb and flood tides. Mean 10th percentile dissolved oxygen (D.O.) of the 1st, 6th and 11th layer, laterally averaged across the channel, should be reported.

Tables and Figures

- 1) Tables for all Back River, all Middle River and Front River from river mile 10 to 31 showing the salinity and velocity and dissolved oxygen output at 0.1 mile intervals for each discharge.
- 2) Salinity output vs river mile at each discharge.
- 3) Velocity output vs river mile at each discharge.
- 4) Dissolved oxygen output vs river mile at each discharge.

Figures showing suitable and unsuitable habitat will be produced after analysis of the tables and figures.

(II) LARVAL DEVELOPMENT:

The habitat suitability model for striped bass indicates that an average salinity of three (3.0) to seven (7.0) ppt is optimal but that larvae can survive in up to 15 ppt salinity (Bain and Bain 1982). Winger and Lasier (1989) concluded, using laboratory studies at a constant salinity, that Savannah River striped bass larvae survived well at three (3.0) to nine ppt (9.0) salinity but survival decreased at higher salinity. Five day old larvae were able to tolerate higher salinity than two day old larvae. The habitat suitability model for striped bass also indicates that a minimum dissolved oxygen level of five (5.0) mg/l or more is optimal for larval development and that habitat suitability decreases rapidly with lower dissolved oxygen levels (Bain and Bain 1982). Larvae are assumed to be motile for most of the period of analysis and could avoid unfavorable conditions such as higher salinity and lower dissolved oxygen levels near the river bottom. The larval development period in the Savannah River can occur from late March through early June. However, the egg development evaluation will cover the April time period and output the same data as the larval analysis with the exception of current velocity. Therefore, we propose to use May flow data for this evaluation. By using the April flow data for the egg evaluation and the May flow data for the larval evaluation, we can obtain more information on how the habitat varies over the season. If the evaluations were to combine the April and May flows, temporal changes will be masked by averaging data over a time of year when factors like dissolved oxygen and salinity in the estuary are changing significantly.

Suitable reaches will contain the following variables:

- a) Mean 50th percentile salinity 3 - 9 ppt
- b) Mean 10th percentile D.O. $\geq$ 4.5 mg/l

Areas not meeting these criteria will be considered unsuitable.

Run Conditions

Geometry: Current baseline conditions and two-foot deepening increments up to 48 ft nominal channel depth, and mitigation features.

Discharge/Tides: We need to evaluate a range of representative flows to cover drought, average and high flow conditions. Therefore, we recommend using the 20% percentile, 50% percentile and 80% percentile levels for May based on the USGS Clio gauge data from 1955 to 2002.

Daily tidal conditions and daily temperature input should be based on May data.

Output

Salinity - Recordings should be taken every ten minutes of the entire tidal cycle for the larval period. The mean of the 50th percentile for the 1st layer, 6th layer and 11th layer, laterally averaged across the channel, should be reported.

Dissolved Oxygen - Recording should be taken every ten minutes over the entire tidal cycle for the larval period. The mean of the 1st layer, 6th layer and 11th layer, laterally averaged across the channel, should be reported.

Tables and Figures

- 1) Tables for all Back River, all Middle River and Front River from river mile 10 to 31 showing the salinity and dissolved oxygen output at 0.1 mile intervals and each discharge.
- 5) Salinity output vs river mile at each discharge.
- 6) Dissolved oxygen output vs river mile at each discharge.

Figures showing suitable and unsuitable habitat will be produced after analysis of the tables and figures.

Literature cited

- Bain, M. B. and J. L. Bain. 1982. Habitat suitability index models: Coastal stocks of striped bass. U.S. Fish and Wildlife Service, Washington D.C. FWS/OBS-82/10.1. 29pp.
- Reinert, T. R., and C. A. Jennings. 1998. Abundance and distribution of striped bass eggs and larvae in the Savannah River estuary - implications for channel dredging window. Annual report submitted to U.S. Army Corps of Engineers, Savannah District. 84 pp.
- Van Den Avyle, M. J., M. A. Maynard, R. C. Klinger and V. S. Blazer. 1990. Effects of Savannah Harbor development on fishery resources associated with the Savannah National Wildlife Refuge. Final report to U.S. Fish and Wildlife Service, Atlanta, GA. 109 pp.
- Will, T. A., T. R. Reinert and C. A. Jennings. 2000. Spatial assessment of current and historic spawning sites of striped bass, *Morone saxatilis*, in the Savannah River estuary. Final report for project 10-21-RR 251-131 submitted to Georgia Department of Natural Resources. Social Circle, GA. 81 pp.
- Winger, P. V. and P. J. Lasier. 1990. Effects of salinity on striped bass eggs and larvae. Final report to the U.S. Army Corps of Engineers, Savannah District. 31 pp.

From: Bailey, William G SAM@SAS
To: "Kay Davy (kay.davy@nqa.gov)"; "Ed Eudaly@fws.gov"; "John Robinette@fws.gov"; "Ted Bisterfeld (bisterfeld.ted@epa.gov)"; "kalumbs.ntale@epamail.epa.gov"; "Mark R. Collins, PhD (collinsm@dnr.sc.gov)"; "Priscilla H Wendt (wendtp@dnr.sc.gov)"; "beckhaic@dhec.sc.gov"; "Curtis Joyner (joynercm@dhec.sc.gov)"; "Kelie Moore@coastal.dnr.state.ga.us"; "Keith Parsons@mail.dnr.state.ga.us"; "Matt Thomas (E-mail)"; "Tim Barrett@dnr.state.ga.us"; "Ron Michaels (E-mail)"; "Stephanie Bolden"
Cc: Garrett, Thomas A SAS; "Keegan, Larry (E-mail)"; "Hope Moorer (E-mail)"; "Ed Durican"; "Brad Gane@dnr.state.ga.us"; "Jane Griess@fws.gov"; Bradley, Kenneth P SAM; "Pace Wilber"; "JENNINGS@smokev.forestry.uca.edu"; "Jeff Isely"; Heine, Hugh SAW; Hoke, Joseph T SAW@SAS
Subject: Savannah Harbor Expansion: Striped Bass Habitat (velocities)
Date: Thursday, August 09, 2007 1:48:13 PM
Attachments: Plan3_6R_EGGS_velocities.pdf
 Plan3_6R_SPAWN_velocities.pdf

Here is some velocity information concerning impacts to Striped Bass. Please let me know within a few days whether you think this information is helpful and if we should develop it for other mitigation plans we are evaluating. If this does not provide the information you were looking for, please let me know.

I asked Beth to include velocity info at some locations where the velocity does not cross the 30 cm/s threshold just to see what the velocity is in that portion of the river.

Bill Bailey

-----Original Message-----

From: Williams, Laura E (Beth) SAW@SAS
 Sent: Thursday, August 09, 2007 12:08 PM
 To: Bailey, William G SAM@SAS
 Cc: Hoke, Joseph T SAW@SAS
 Subject: Striped Bass Habitat (velocities)

Bill,

Attached are two figures showing impacts to striped bass habitat for the 48 ft depth with Mitigation Plan 3. The maps are broken down into two main categories: habitat gained and habitat lost. However, the habitat lost is broken down even further to tell why the habitat isn't suitable (velocity, salinity, DO, or a combination). There are mean velocities shown on the map for some of the cells as well.

Just as a reminder, the habitat criteria is as follows:

Striped Bass Spawning:

90th percentile salinity <= 1ppt.
 mean velocity >= 30 cm/s

Striped Bass Eggs:


50th percentile salinity <= 9 ppt
 mean velocity >= 30 cm/s
 10th percentile DO >= 4.5 mg/L

Let me know if the agencies think this is useful information.

Thanks,
 Beth


Beth Williams, PE

Hydraulic Engineer
US Army Corps of Engineers
(912) 652-5268
laura.e.williams@sas02.usace.army.mil

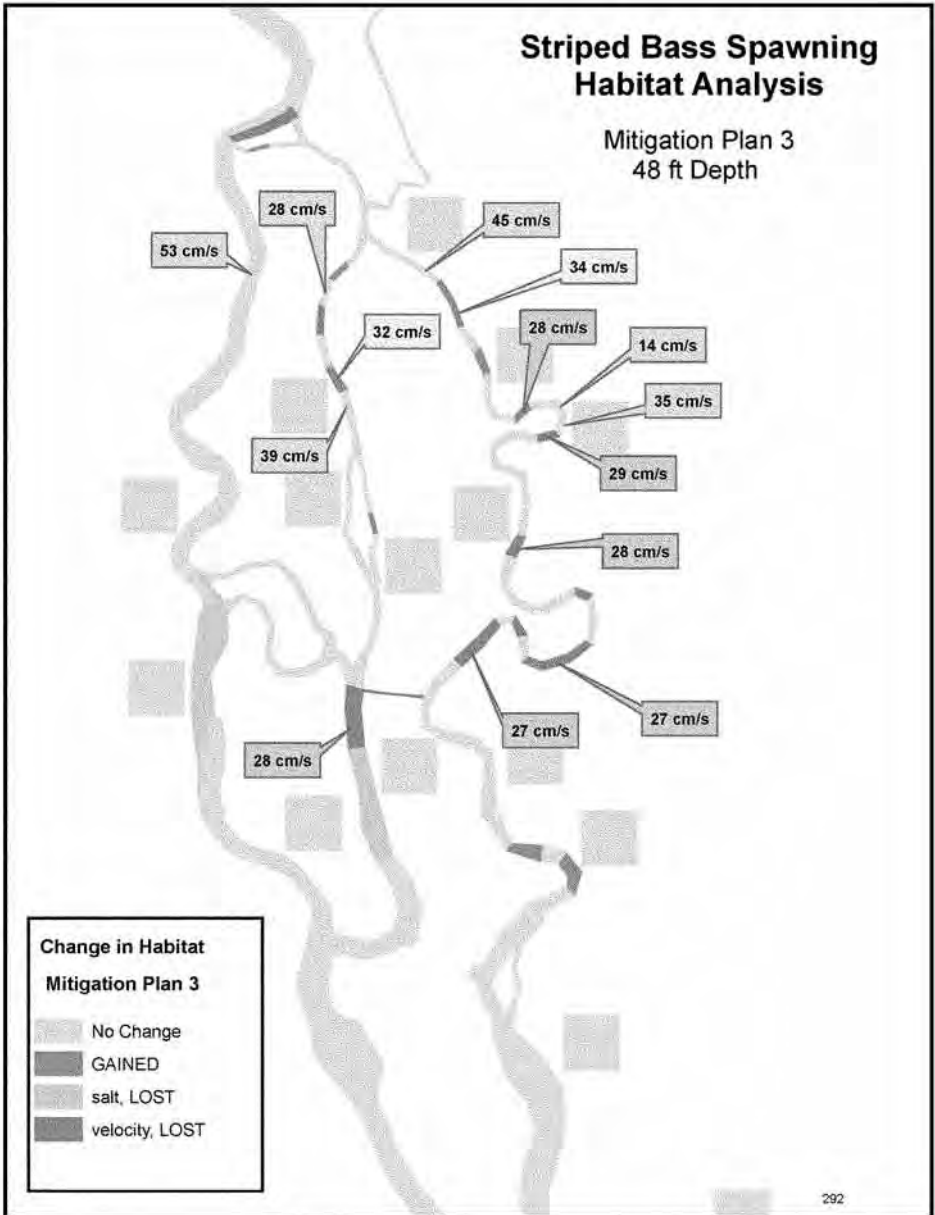

Striped Bass Eggs Habitat Analysis

Mitigation Plan 3
48 ft Depth

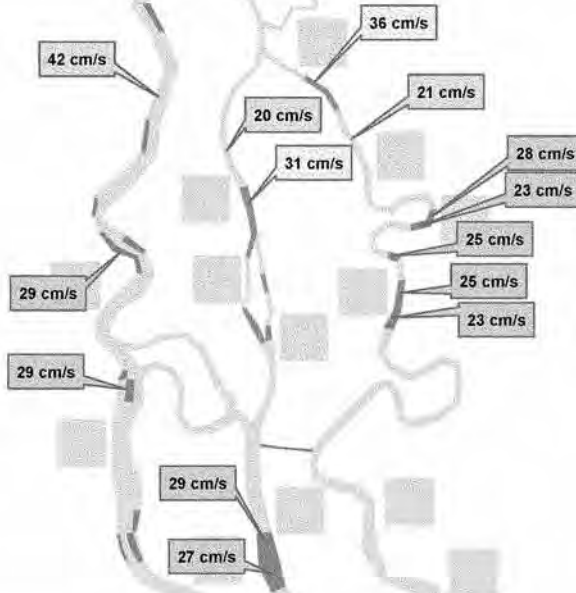

Change in Habitat Mitigation Plan 3

- No Change
- GAINED
- salt, LOST
- velocity, LOST
- velocity & DO, LOST

From: Bailey, William G SAM@SAS
To: "Kay Davy (kay.davy@nps.gov)"; "Stenhanja Bolden"; "Ed Eudaly@fws.gov"; "John Robinette@fws.gov"; "Teri Bisterfeld (bisterfeld.teri@epa.gov)"; "Bob Perry"; "Priscilla H Wendt (wendthp@dnr.sc.gov)"; "beckhaic@dhec.sc.gov"; "Curtis Joyner (joynercm@dhec.sc.gov)"; "Kele Moore@coastal.dnr.state.ga.us"; "Ron Michaels (E-mail)"; "Keith Parsons@mail.dnr.state.ga.us"; "Matt Thomas (E-mail)"; "Tim Barrett@dnr.state.ga.us"
Cc: Garrett, Thomas A SAS; "Keegan, Larry (E-mail)"; "Hope Moorer (E-mail)"; "Mark R. Collins, PhD (collinsm@dnr.sc.gov)"; "Ed Duncan"; "kalumba.ntale@epamail.epa.gov"; "Brad Gane@dnr.state.ga.us"; "Jane Gress@fws.gov"; Bradley, Kenneth P SAM; "Pace Wilber"; "JENNINGS@smokev.forestry.uga.edu"; "Jeff Isely"; "jotchensw@wec.ufl.edu"; Heine, Hugh SAW; Hoke, Joseph T SAW@SAS; Williams, Laura E (Beth) SAW@SAS; "kirklaql@dhec.sc.gov"; "PRESTOHS@dhec.sc.gov"; "Jeff Larson@dnr.state.ga.us"; Bradley, Kenneth P SAM; Eubanks, Michael J SAM; Heine, Hugh SAW; Small, Daniel L SAD; Barnett, Dennis W SAD; Kopecky, Steven A HQ02; Matusiak, Mark HQ02
Subject: Savannah Harbor Expansion Project: Fishery Impact Table
Date: Monday, March 17, 2008 11:43:23 AM
Attachments: Fishery Impacts with Proposed Plans.xls

I've attached a table which summarizes the fishery impact information with the D.O. systems.

We are finalizing the impact report which contains figures showing locations of Acceptable vs. Unacceptable Habitat. We expect to send out a link to that report later this week. The report is too big to send my email, so you will have to download it from an ftp site. If you want us to send it on CD, please let me know.

Bill Bailey
 912-652-5781

AMERICAN SHAD

	SOUTHERN HABITAT (km ²)			
	April-May	May-June	June-July	July-August
Existing Conditions	19.86	19.96	19.96	19.82
42 ft depth				11.54
44 ft depth	19.50	19.50	19.61	19.58
% difference	-1.8%	-1.8%	-1.7%	0.2%
% diff Chesapeake City**	0.0%	0.0%	0.0%	-1.4%
45 ft depth	19.81	19.81	19.81	19.54
Pay file				-
% difference	-1.8%	-1.8%	-1.7%	0.2%
% diff Chesapeake City**	0.0%	0.0%	0.0%	-0.4%
46 ft depth	19.81	19.81	19.81	19.81
Pay file				-
% difference	-1.8%	-1.8%	-1.7%	0.2%
% diff Chesapeake City**	0.0%	0.0%	0.0%	-0.4%
48 ft depth	19.61	19.61	19.61	19.61
Pay file				-
% difference	-1.6%	-1.6%	-1.7%	0.4%
% diff Chesapeake City**	0.0%	0.0%	0.0%	-1.2%

STRIPED BASS

	EGGS				LARVAE				SPAWNING			
	April-May	May-June	June-July	July-August	April-May	May-June	June-July	July-August	April-May	May-June	June-July	July-August
Existing Conditions	3.88	6.15	9.82	9.13	0.81	2.22	2.16	3.47	2.60	4.08	4.31	7.48
42 ft depth												
44 ft depth	22.3%	9.4%	7.6%	17.45%	17.45%	-5.6%	-13.7%	-1.7%	-15.2%	-2.8%	-12.2%	-8.5%
% difference	-10.2%	-9.7%	-2.2%	-11.5%	-11.5%	-1.1%	-1.1%	-1.1%	-17.6%	-6.0%	-12.2%	-8.5%
% diff Chesapeake City**												
45 ft depth	3.21	7.13	9.88	2.32	1.67	2.32	2.32	4.32	2.23	3.82	3.82	8.82
Pay file												
% difference	-17.6%	6.2%	8.0%	167.1%	107.1%	7.6%	7.6%	7.6%	-13.9%	9.2%	9.2%	-8.5%
% diff Chesapeake City**	-12.3%	-11.2%	-4.6%	-19.6%	-19.6%	-1.1%	-1.1%	-1.1%	-15.2%	-2.8%	-12.2%	-8.5%
46 ft depth	3.58	6.78	9.70	2.35	2.41	4.43	4.43	3.78	2.10	3.78	3.78	8.84
Pay file												
% difference	-7.8%	6.0%	8.9%	101.4%	6.6%	10.1%	10.1%	10.1%	-18.7%	-10.0%	-10.0%	-10.8%
% diff Chesapeake City**	-14.0%	-15.9%	-4.6%	-21.0%	-21.0%	-4.6%	-4.6%	-4.6%	-12.7%	-13.0%	-13.0%	-12.8%
48 ft depth	3.71	6.05	9.44	2.06	2.06	2.20	2.20	5.22	1.97	3.53	3.53	6.47
Pay file												
% difference	-4.6%	-10.9%	-3.4%	154.6%	-3.4%	-3.4%	-3.4%	-3.4%	-21.9%	-16.9%	-16.9%	-13.2%
% diff Chesapeake City**	-19.6%	-24.5%	-7.2%	104.6%	-7.2%	-7.2%	-7.2%	-7.2%	-19.7%	-19.7%	-19.7%	-17.3%

SHORTNOSE STURGEON

	JUVENILES				ADULTS			
	January-February	March-April	May-June	July-August	January-February	March-April	May-June	July-August
Existing Conditions	6.94	16.10	5.73	0.81				
42 ft depth								
44 ft depth	7.06	15.08	6.34	-				
Pay file								
% difference	1.7%	-6.4%	10.6%	-				
% diff Chesapeake City**	0.0%	-12.8%	-21.8%	-				
45 ft depth	7.16	14.97	5.56	-				
Pay file								
% difference	2.4%	-7.0%	-3.1%	-				
% diff Chesapeake City**	-10.4%	-0.9%	-31.8%	-				
46 ft depth	6.98	14.72	5.51	-				
Pay file								
% difference	0.1%	-6.6%	-3.8%	-				
% diff Chesapeake City**	-15.9%	-0.8%	-35.1%	-				
48 ft depth	6.86	14.33	5.17	6.21				
Pay file								
% difference	-1.6%	-11.0%	-9.7%	655.5%				
% diff Chesapeake City**	-21.6%	-1.1%	-41.9%	-				

From: [Bailey, William G SAM@SAS](mailto:Bailey.William.G.SAM@SAS)
To: [Kay Davy \(kay.davy@noaa.gov\)](mailto:Kay.Davy@noaa.gov); [Ed Eudaly@fws.gov](mailto:Ed.Eudaly@fws.gov); [John Rohinette@fws.gov](mailto:John.Rohinette@fws.gov); [Ted Bisterfeld \(bisterfeld.ted@epa.gov\)](mailto:Ted.Bisterfeld@bisterfeld.ted@epa.gov); [Jaime Ntale@epamail.epa.gov](mailto:Jaime.Ntale@epamail.epa.gov); [Mark R. Collins, PhD \(collinsm@dnr.sc.gov\)](mailto:Mark.R.Collins.PHD@dnr.sc.gov); [Priscilla H Wendt \(wendtp@dnr.sc.gov\)](mailto:Priscilla.H.Wendt@dnr.sc.gov); beckhaic@dhec.sc.gov; [Curtis Joyner \(joynercm@dhec.sc.gov\)](mailto:Curtis.Joyner@dnr.sc.gov); [Kelie Moore@coastal.dnr.state.ga.us](mailto:Kelie.Moore@coastal.dnr.state.ga.us); [Keith Parsons@mail.dnr.state.ga.us](mailto:Keith.Parsons@mail.dnr.state.ga.us); [Matt Thomas \(F-mail\)](mailto:Matt.Thomas@dnr.state.ga.us); [Joel Fleming](mailto:Joel.Fleming@dnr.state.ga.us); [Patrick Geer \(F-mail\)](mailto:Patrick.Geer@dnr.state.ga.us); [John Pafford \(F-mail\)](mailto:John.Pafford@dnr.state.ga.us); [Ron Michaels \(F-mail\)](mailto:Ron.Michaels@dnr.state.ga.us); [Stephanie Bolden](mailto:Stephanie.Bolden@dnr.state.ga.us)
Cc: [Calver, James S SAM@SAS](mailto:Calver,James.S.SAM@SAS); [Garrett, Thomas A SAS](mailto:Garrett,Thomas.A.SAS); [Keegan Larry \(F-mail\)](mailto:Keegan.Larry@dnr.state.ga.us); [Hopie Moore \(F-mail\)](mailto:Hopie.Moore@dnr.state.ga.us); [Ed Duncan](mailto:Ed.Duncan@dnr.state.ga.us); [Brad Gane@dnr.state.ga.us](mailto:Brad.Gane@dnr.state.ga.us); jane.gness@fws.gov; [Bradley, Kenneth P SAM](mailto:Bradley,Kenneth.P.SAM); kirkkapl@dhec.sc.gov; PRESTON@dhec.sc.gov; david.bernhart@noaa.gov; [Pace Wilber](mailto:Pace.Wilber@dnr.state.ga.us); JENNINGS@smokey.forestry.uga.edu; [Jeff Isely](mailto:Jeff.Isely@dnr.state.ga.us); [Wade Cantrell](mailto:Wade.Cantrell@dnr.state.ga.us); [Heine, Hugh SAW](mailto:Heine,Hugh.SAW); [Hoke, Joseph T SAW@SAS](mailto:Hoke,Joseph.T.SAW@SAS); steven.davie@tetratech-ffv.com
Subject: Savannah Harbor Expansion: Fisheries Interagency Coordination Team -- summary of fisheries results for impact and mitigation runs
Date: Friday, April 06, 2007 11:13:24 AM
Attachments: [Summary of Fisheries habitat for Savannah River Expansion Project Update 27 February 2007 BB.xls](#)
[Mitigation Run Summaries of Fisheries Habitat for Savannah River Expansion Project 28 February 2007 BB.xls](#)

Here are summaries we prepared of the fishery results for the impact and mitigation runs.

I hope these help with your review of the reports we sent out last week.

Bill Bailey

DRAFT
MITIGATION PLAN 1
COMPARISONS OF HABITAT AREAS FOR BASELINE AND PROJECT SCENARIOS
SAVANNAH HARBOR EXPANSION PROJECT

STRIPED BASS - SPAWNING

2-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	2.958258	2.145611	-0.812647	-201.03	-27.5%
	50	4.289636	3.860990	-0.428646	-106.00	-10.0%
	80	7.472033	7.067389	-0.404644	-99.70	-5.4%
3-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	2.958258	2.045795	-0.912463	-225.15	-30.8%
	50	4.289636	3.716500	-0.573136	-142.04	-13.4%
	80	7.472033	6.784634	-0.687399	-169.87	-9.2%
4-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	2.958258	1.921294	-1.036964	-256.58	-35.1%
	50	4.289636	3.680251	-0.609385	-150.52	-14.2%
	80	7.472033	6.547445	-0.924588	-228.95	-12.4%
6-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	2.958258	1.799652	-1.158606	-286.55	-39.2%
	50	4.289636	3.395432	-0.894204	-220.48	-20.8%
	80	7.472033	6.248614	-1.225419	-302.81	-16.4%

DRAFT
MITIGATION PLAN 1
COMPARISONS OF HABITAT AREAS FOR BASELINE AND PROJECT SCENARIOS
SAVANNAH HARBOR EXPANSION PROJECT

STRIPED BASS - EGGS

2-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	4.903563	3.385002	-1.518561	-375.63	-31.0%
	50	7.284086	5.946143	-1.337943	-331.19	-18.4%
	80	9.148369	9.017840	-0.130529	-31.65	-1.4%
3-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	4.903563	3.301659	-1.601904	-396.22	-32.7%
	50	7.284086	5.764220	-1.519866	-376.19	-20.9%
	80	9.148369	8.838564	-0.309805	-76.86	-3.4%
4-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	4.903563	3.229359	-1.674204	-413.19	-34.1%
	50	7.284086	5.307388	-1.976698	-487.78	-27.1%
	80	9.148369	8.709830	-0.438539	-108.51	-4.8%
6-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	4.903563	2.913681	-1.989882	-491.95	-40.6%
	50	7.284086	4.841949	-2.442137	-602.98	-33.5%
	80	9.148369	8.374261	-0.774108	-192.15	-8.5%

DRAFT
MITIGATION PLAN 1
COMPARISONS OF HABITAT AREAS FOR BASELINE AND PROJECT SCENARIOS
SAVANNAH HARBOR EXPANSION PROJECT

STRIPED BASS - LARVAE

2-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	0.818275	1.233199	0.414924	102.52	50.7%
	50	2.423079	2.081628	-0.361451	-89.21	-14.9%
	80	4.048194	6.191287	2.143093	529.17	52.9%
3-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	0.818275	1.338056	0.519781	128.40	63.5%
	50	2.423079	1.993000	-0.430079	-105.88	-17.7%
	80	4.048194	5.771564	1.723370	426.14	42.6%
4-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	0.818275	1.607562	0.789287	195.12	96.5%
	50	2.423079	1.992009	-0.431070	-106.58	-17.8%
	80	4.048194	6.136214	2.088020	516.17	51.6%
6-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	0.818275	1.693488	0.875213	216.35	107.0%
	50	2.423079	1.979390	-0.443689	-109.57	-18.3%
	80	4.048194	6.042082	1.993888	493.16	49.3%

AMERICAN SHAD

MAY

DRAFT

MITIGATION PLAN 1

COMPARISONS OF HABITAT AREAS FOR BASELINE AND PROJECT SCENARIOS

SAVANNAH HARBOR EXPANSION PROJECT

2-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	19.962807	19.927399	-0.035408	-9.9	-0.2%
	50	19.962807	19.927399	-0.035408	-9.9	-0.2%
	80	19.962807	19.927399	-0.035408	-9.9	-0.2%
3-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	19.962807	19.927399	-0.035408	-9.9	-0.2%
	50	19.962807	19.927399	-0.035408	-9.9	-0.2%
	80	19.962807	19.927399	-0.035408	-9.9	-0.2%
4-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	19.962807	19.927399	-0.035408	-9.9	-0.2%
	50	19.962807	19.927399	-0.035408	-9.9	-0.2%
	80	19.962807	19.927399	-0.035408	-9.9	-0.2%
6-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	20	19.962807	19.927399	-0.035408	-9.9	-0.2%
	50	19.962807	19.927399	-0.035408	-9.9	-0.2%
	80	19.962807	19.927399	-0.035408	-9.9	-0.2%

AMERICAN SHAD JANUARY DRAFT
MITIGATION PLAN 1
COMPARISONS OF HABITAT AREAS FOR BASELINE AND PROJECT SCENARIOS
SAVANNAH HARBOR EXPANSION PROJECT

2-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	19.962807	19.927399	-0.035408	-9.9	-0.2%
3-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	19.962807	19.927399	-0.035408	-9.9	-0.2%
4-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	19.962807	19.927399	-0.035408	-9.9	-0.2%
6-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	19.962807	19.927399	-0.035408	-9.9	-0.2%

DRAFT						
MITIGATION PLAN 1						
COMPARISONS OF HABITAT AREAS FOR BASELINE AND PROJECT SCENARIOS						
SAVANNAH HARBOR EXPANSION PROJECT						
AMERICAN SHAD	AUGUST					
2-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	15,191,188	16,248,356	1,057,168	262.77	7.0%
3-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	15,191,188	16,168,022	0,976,834	240.24	6.4%
4-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	15,191,188	16,168,022	0,976,834	240.24	6.4%
6-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	15,191,188	16,168,022	0,976,834	240.24	6.4%

DRAFT
MITIGATION PLAN 1
COMPARISONS OF HABITAT AREAS FOR BASELINE AND PROJECT SCENARIOS
SAVANNAH HARBOR EXPANSION PROJECT
STURGEON ADULTS JANUARY

2-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	5.012443	4.525763	-0.486680	-120.14	-9.7%
3-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	5.012443	4.308158	-0.704285	-174.64	-14.1%
4-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	5.012443	4.141658	-0.870787	-215.52	-17.4%
6-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	5.012443	3.842213	-1.170230	-288.59	-23.3%

DRAFT						
MITIGATION PLAN 1						
COMPARISONS OF HABITAT AREAS FOR BASELINE AND PROJECT SCENARIOS						
SAVANNAH HARBOR EXPANSION PROJECT						
STURGEON ADULT AUGUST						
2-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	0.292598	0.193631	-0.098967	-24.44	-33.8%
3-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	0.292598	0.178336	-0.114262	-28.27	-39.1%
4-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	0.292598	0.170142	-0.122456	-30.29	-41.9%
6-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	0.292598	0.162281	-0.130317	-32.17	-44.5%

DRAFT
MITIGATION PLAN 1
COMPARISONS OF HABITAT AREAS FOR BASELINE AND PROJECT SCENARIOS
SAVANNAH HARBOR EXPANSION PROJECT

STURGEON JUVENILES

2-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	2.815892	2.765188	-0.050704	-12.52	-1.8%
3-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	2.815892	2.756895	-0.058897	-14.61	-2.1%
4-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	2.815892	2.756895	-0.058897	-14.61	-2.1%
6-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	2.815892	2.749133	-0.066759	-16.70	-2.4%

DRAFT						
MITIGATION PLAN 1						
COMPARISONS OF HABITAT AREAS FOR BASELINE AND PROJECT SCENARIOS						
SAVANNAH HARBOR EXPANSION PROJECT						
SOUTHERN FLOUNDER						
2-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	0.402031	0.356592	-0.045439	-11.23	-11.3%
3-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	0.402031	0.345221	-0.056810	-14.01	-14.1%
4-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	0.402031	0.335332	-0.066699	-16.49	-16.8%
6-FOOT DEPTH	% - TILE	BASELINE (km2)	PROJECT (km2)	DIFFERENCE (km2)	DIFFERENCE (acre)	% CHANGE
	50	0.402031	0.274398	-0.127633	-31.49	-31.7%

From: Bailey, William G SAM@SAS
To: "Kelle Moore@coastal.dnr.state.ga.us"; "Tim Barretto@dnr.state.ga.us"; "Priscilla H Wendt /hwendt@dnr.sc.gov"; "Bob Perry"; "beckhajn@dhc.sc.gov"; "Kay Davy (kay.davy@noaa.gov)"; "Stephanie Bolden"; "Ed Furdah"; "Ted Bisterfeld /bisterfeld.ted@epa.gov"
Cc: "Brad Gane@dnr.state.ga.us"; "Jeff Larson@dnr.state.ga.us"; "Mark R. Collins, PhD (collinsm@dnr.sc.gov)"; "Curtis Joyner"; "Flakes, Curtis M SAM; Bradley, Kenneth P SAM; Okane, Jason D SAS; "Miles M. Croom (E-mail)"; "David Bernhart"; "Pace Wilber"; "bob.hoffman@noaa.gov"; "Mueller Heinz@epamail.epa.gov"; "Bill Wilkoff@fws.gov"; "Jane Griess@fws.gov"; "Chuck Hayes"; "Russ Webb"
Subject: Savannah Harbor Expansion: Fisheries Interagency Coordination Team -- Revised Juvenile SNS Habitat Suitability Criteria
Date: Saturday, August 29, 2009 9:42:33 AM
Attachments: SNS_Jan_habitat_50%maxsalt14.9Plan66PLUS.pdf
 SNS_Jan_habitat_50%maxsalt14.9EXISTING.pdf
 SNS_Jan_habitat_50%maxsalt14.9.pdf
 bottom_salinity_existingJAN99.tif
 SNS_JAN_50saltEX.pdf
 SNS_JAN_75ofmaxsaltEX.pdf
 SNS_JAN_maxsaltEX.pdf
 SNS_I_1.pdf
 SNS_JAN_50ofmaxsaltEX.pdf

NOAA Fisheries has expressed concern that the present habitat suitability criteria do not sufficiently reflect known areas of suitable habitat. The main area of concern is on the Front River between the Houlihan Bridge and the confluence of the Front and Middle Rivers. Recent studies have found juvenile Shortnose sturgeon there in the winter months, but the models didn't show that area as providing acceptable habitat. The Corps described how the Fisheries Coordination Team developed the criteria (if erring, then the error would be on the conservative side) and how the hydrodynamic and D.O. models aggregate salinity and D.O. values that they calculate for each grid cell for every 15 minutes over the duration of a modeling run.

NOAA reviewed the water quality data associated with the SNS collections in Savannah Harbor. Collins et al 1999-2000 data showed that when juvenile SNS were captured in or adjacent to the fish hole in Middle River (when temperatures were <22 degrees), the maximum salinity was 14.9 ppt. NOAA also kept in mind research conducted at other locations that included salinity information -- juvenile SNS found in salinities up to 17.6 ppt. We jointly tried a couple different salinity criteria, trying to make the models' identification of acceptable habitat match where the fish have been found. The wide tidal range here in Savannah doesn't make things easy, as the salinity in the upper end of the navigation channel is constantly changing. That variation makes it important whether the criteria use average values (over a model run), maximum values, or some percentile of the maximum. We always examined salinity levels in the bottom layer of the model, since SNS are bottom-oriented fish.

I have attached several figures that we used in our analysis of the situation and development of our proposed revision of the juvenile SNS salinity criteria. Although dissolved oxygen is also a component of the SNS habitat suitability criteria, the concern is for the model's performance for juvenile SNS habitat in the winter. During the winter months, D.O. is not a problem and is not a factor in determining which model grid cells show up as providing suitable habitat.

One figure shows the maximum salinity values in that portion of Front River, which range from 11 to 20 ppt (existing conditions). However, another figure shows the average bottom salinity in that same area -- which range from <1 to 3 ppt (existing conditions). I've attached a plot showing how the bottom salinity varies with the tide and over a lunar cycle. It varies quite a bit, which also means that the salinity at a given location is constantly changing. The peak salinity values occur during neap tide, when the mixing is less and salinity moves further into the estuary.

In light of the large tidal influence and the marked effect it has on bottom salinities in this area, one can conclude that maximum salinity values do not fully characterize the habitat quality in a given location. The salinity levels change hourly, often by 0.5 ppt per hour. So the maximum salinity values overstate the salinity that the fish must deal with on a regular (constant) basis.

As a result of all that, we propose revising the salinity criteria for juvenile SNS in the winter as shown below:

EXISTING	PROPOSED
bottom layer max salinity ≤ 4 ppt	bottom layer 50%-tile of max salinity ≤ 14.9 ppt

The Corps believes that the 50%-tile of maximum bottom salinity is a better representation of the typical (average) conditions under which SNS must survive. That parameter is well above the average bottom salinity value as it includes also the higher values which SNS must deal with for a few hours at a time. NOAA Fisheries agree that the 50%-tile of maximum bottom salinity parameter with the 14.9 ppt upper threshold best reflects SNS juvenile habitat as known by field studies. They support our proposing the revised criteria to the Fisheries Team for approval.

NOTE: The Habitat Suitability Criteria that the Interagency Team developed in 2003 did not specify the details of the salinity number (average, maximum, etc.). When the Corps began to apply the criteria, we interpreted the ≤ 4 ppt as being a maximum threshold. If we had interpreted it as being an average value for a grid cell, the area in the harbor identified as being suitable would have been much larger than the original analysis, extending even further downstream than what shows as being suitable using the proposed ≤ 14.9 ppt and 50%-tile of maximum salinity threshold.

Please let me know by COB 8 September if you concur in our proposal to use the 50%-tile of the maximum bottom salinity and 14.9 ppt as the upper threshold for acceptable SNS juvenile habitat in the winter.

Thank you for your time on this project.

Bill Bailey

>
>
>
>

D. Water Quality

1. MFR dated 24 September 2002, SHEP, Summary of 18 Sep Interagency Meeting on Evaluation of Impacts to Water Quality.
2. MFR dated 13 May 2003, SHEP, Summary of 8 May Interagency Meeting on Evaluation of Impacts to Water Quality.
3. MFR dated 24 June 2003, SHEP, Summary of 18 June Interagency Meeting on Evaluation of Impacts to Water Quality.
4. MFR dated 3 September 2003, SHEP, Summary of 20 August Joint Meeting on Review of Draft D.O. Model Calibration Report.
5. MFR dated 7 March 04, Revised 15 March 04, SHEP, Summary of 4 March Meeting of the Interagency Water Quality Team.
6. MFR dated 31 March 04, Revised 10 May 04, SHEP, Summary of 31 March Meeting of Interagency Water Quality Team.
7. MFR dated 22 April 04, SHEP, Summary of 20 April Meeting of the Interagency Water Quality Team.
8. Memo. Notes, SHEP Model Review Meeting 16-17 June 2005 and SHEP Interagency Water Quality Team Meeting held 17 June 2005. Tetra Tech. Inc., Atlanta, Georgia
9. MFR dated 5 June 06, Revised 30 June 06, SHEP, Summary of 25 Meeting of the Water Quality Interagency Coordination Team.
10. MFR dated 23 Jan 07, Revised 29 Jan 2007, SHEP, Summary of 19 Jan Meeting of the Interagency Water Quality Coordination Team.
11. MFR dated 7 June 08, SHEP, Summary of 27 May Meeting of the Interagency Water Quality Coordination Team.
12. E-MAIL from Joseph T. Hoke, dated 12 October 2004, SHEP, EFDC Training, EFDC model contract review meeting
13. E-MAIL from Joseph T. Hoke, dated 13 December 2004, SHEP, EFDC Model Grid Resolution Technical Memo
14. MINUTES, 11 January 2005 Meeting, SHEP, Project Model Development
15. LETTER from EPA, dated 25 August 2005, SHEP, Final Report – Hydrodynamic and Water Quality Model for the Savannah Harbor.
16. E-MAIL from Joseph T. Hoke, dated 17 November 2005, SHEP, Hydrodynamic and WQ Model Calibration Report Review
17. LETTER from South Carolina DHEC, dated 10 March 2006, SHEP, Review of Report, "Development of the Hydrodynamic and Water Quality Models for SHEP."
18. E-MAIL from Wilber Pace, dated 14 May 2006, SHEP, Hydrodynamic Water Quality Models
19. E-MAIL from William G. Bailey, dated 18 May 2007, SHEP, Interagency Water Quality Team – EFDC/WASP input & output files
20. E-MAIL from William G. Bailey, dated 14 May 2008, SHEP, Review of D.O. Demonstration Project Report
21. MFR dated 7 June 2008, Summary of 27 May meeting of the Interagency Water Quality Coordination Team
22. E-MAIL from William G. Bailey, dated 30 June 2008, SHEP, Interagency Water Quality Coordination Team – Review of D.O. Demonstration Project Report.

23. MFR dated 30 April 2009, SHEP, Summary of 29 April meeting of the Interagency Water Quality Team
24. EMAIL from William G. Bailey, dated 27 Oct 2010, SHEP, Interagency Water Quality Coordination Team: DO Injection Design Report

CESAS-PD-E

24 September 02

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 18 September Interagency Meeting on Evaluation of Impacts
to Water Quality

1. Attendees:

GA DNR-EPD:	Roy Burke III
SC DHEC:	Wade Cantrell
COE:	Bill Bailey
EPA:	Steve Whitlock
USGS	Paul Conrads
ATM/GPA:	Bo Ellis & Matt Goodrich
ASA/GPA:	Danny Mendelsohn & Eduardo Yasuda
City of Sav:	Bob Scanlon
Law Env:	Larry Neal & David Sample

2. I started by explaining the purpose of this interagency coordination. It is for agencies with regulatory authority over the Expansion Project to discuss their views about water quality impacts with Savannah District. The Corps wants to discuss how the water quality modeling tools will be applied once they are fully developed. We want to identify what the agencies will want (tools and techniques) to properly identify and evaluate project impacts. The ultimate goal is for the Corps to ensure the EIS addresses all the items in acceptable manners, so that the agencies will be able to approve the project when they review the draft EIS. The Corps will also separately coordinate with the agencies to discuss potential project impacts to wetlands, fisheries, groundwater, and on sediment placement. This particular coordination effort is intended to discuss issues that will arise in the evaluation of water quality impacts and Section 401 certification.

3. We then discussed the parameters that the agencies believe will need to be evaluated in the EIS. The items include the following:
 - Dissolved Oxygen
 - Temperature
 - Mixing zone of point sources
 - Assimilative capacity of Dissolved Oxygen in the harbor
 - Chlorides at Abercorn Creek

4. We then started to discuss the critical conditions under which the models should be run to evaluate each of these parameters. The state representatives quickly informed me that the issue of critical conditions was a substantial one and one that would ultimately be determined by the managers in their agencies. They also said they were

somewhat uncomfortable having this type of discussion when members of the regulated community are present. They traditionally do not involve the point source dischargers or their consultants in pre-decisional discussions on these issues. We agreed that I would review the project files and find the letter that EPA and the States had prepared a year or so ago about the critical conditions. I would then attach that letter to this meeting summary and provide it to the States so they could start discussions with the managers within their agencies. We concluded this discussion with a recommendation from the States that I send a letter to their agencies explaining what I desired from them through this coordination. I will use the next paragraphs in lieu of such a letter.

The Georgia Ports Authority will soon complete development of several computer models that can identify physical impacts to the environment that would occur from proposed changes to Savannah Harbor. The Savannah District, U.S. Army Corps of Engineers intends to use these models in its identification and evaluation of potential impacts from the Savannah Harbor Expansion Project. To maximize the efficiency of Federal, State and private manpower resources, the District would like to know what the agencies will need in their Section 401 review of this project. We would like to identify the specific model runs the regulatory agencies would like see performed for them to consider a water quality impact evaluation to be sufficient and complete. If we know what analyses the regulatory agencies will want to see when they review the Draft EIS, we will be able to ensure those analyses are performed and included in that document. This should simplify review of the proposed actions.

Savannah District would like to know the views of each regulatory agency on the input conditions (critical conditions) it should use to adequately identify water quality impacts from proposed actions in the estuary. For evaluation of Dissolved Oxygen, these input conditions would likely include the river discharge, the period of year, extent of loading from point source discharges (existing loads or some percentage of their permitted loads), and possibly the tidal period. Evaluation of possible impacts to (1) temperature, (2) the mixing zones of point sources, and (3) the harbor's assimilative capacity for Dissolved Oxygen, may use the same list of input conditions but with slightly different numbers/dates. To evaluate potential impacts to chlorides at Abercorn Creek, it would seem that the important input parameters would be the river discharge and the tidal period.

We would also like to know how the regulatory agencies would like to see the model output. This question is of most importance in identifying impacts to Dissolved Oxygen. Do the agencies want to see the daily average results at a given location, hourly results, or the minimum values? Should the results be in terms of a cross-sectional average, depth averaged, or at any point in the water column? If an agency has a specific

output format that they desire, please let us know. Otherwise, we intend to present the information through both numerically (charts) and visually (maps).

5. The timing of subsequent coordination meetings will depend upon the agencies' response to this meeting summary and their decisions on how to best meet the Corps' desire for ongoing coordination for this project.

William Bailey
Environmental Resources Branch



Environmental Protection Division, Water Protection Branch
 4220 International Parkway, Suite 101, Atlanta, Georgia 30354
 Alan W. Hallum, Branch Chief
 404/675-6232

May 4, 2000

Ms. Beverly Banister, Acting Director
 Water Management Division
 US EPA - Region 4
 61 Forsyth Street SE
 Atlanta, Georgia 30303

Dear Ms. Banister:

South Carolina and Georgia are keenly interested in the Savannah Harbor and Savannah River modeling projects and how they should be used to assess water quality standards and develop wasteload allocations and Total Maximum Daily Loads (TMDLs) in the watershed. It is important, for proper stewardship and effective management of this vital resource, that both states adopt and employ consistent critical conditions and modeling practices for these regulatory functions.

Over the last six months, staff members from the South Carolina Bureau of Water (SCDHEC) and the Georgia Environmental Protection Division (GAEPD) Water Protection Branch met several times to assess respective state regulations and procedures. From this, they compiled a set of critical conditions for the Savannah River watershed, including Savannah Harbor, which are consistent between the states, which conform to state laws and regulations, and which should be used for water quality issues involving interstate waters. The list below contains the initial set now confirmed and adopted by each state.


- o The critical minimum low flow from Thurmond Dam is 3600 cfs (as a daily average).
- o Critical minimum flows in the River downstream of Thurmond Dam will be determined by adding 7Q10 low flows from incremental drainage areas to the minimum from Thurmond Dam. (Critical low flow values for various points in the River will be provided by the combined staff of the Bureau of Water and Water Protection Branch.)
- o Critical low flows in the River, thus determined, will in turn become the critical freshwater flows input to the upstream boundary of the Harbor model.
- o For the Harbor model critical meteorological and tidal conditions will be those measured during the recent Summer-Fall 1999 field survey.

Ms. Beverly Banister
 Page 2
 May 4, 2000

- o All intakes and discharges should be represented in the critical conditions model at their permit limits expressed as a monthly average.
- o The current 1999 Harbor channel 'bathymetric' configuration should be used to determine natural or baseline conditions for the Harbor if that becomes necessary.


Additional state specifications of critical conditions, that do not appear in this list, are likely. These will be provided by the combined staffs of the South Carolina Bureau of Water Pollution Control and the GAEPD Water Protection Branch, when needed.

Sincerely,



Alton Boozer, Chief
 Bureau of Water Pollution Control
 SCDHEC

Sincerely,



Alan W. Hallum, Chief
 Water Protection Branch
 GA EPD

AB/AH/rbf

CESAS-PD-E

13 May 03

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 8 May Interagency Meeting on Evaluation of Impacts to
Water Quality

- I. Attendees:

EPA:	Jim Greenfield Steve Whitlock
USGS	Paul Conrads
GA DNR-EPD:	Roy Burke III Paul Lamarre
City of Sav:	Bob Scanlon
MACTEC (Law Env):	Larry Neal
ATM/GPA:	Steve Peene & Bo Ellis Danny Mendelsohn, Henry Rines & Tom Gallagher
LGE/GPA:	Larry Keegan
COE:	Doug Plachy Bill Bailey

2. A copy of the agenda is attached.

3. I opened the meeting by stating that ATM wanted us to review what they were doing leading to calibration of the D.O. Model, provide them with guidance, and inform the group if anything they are doing may be unacceptable to our agencies.

4. Henry Rimes began by discussing the findings in their **Draft D.O. Characterization Report**. Concerning **Primary Productivity**, it appears that algal production is not a major activity within the estuary. Algae enter the estuary from upriver and the ocean, but the low light penetration appears to limit productivity within the harbor area. ATM agreed to conduct an initial test to determine whether the model indicates that algal production is important in the harbor area. If the initial runs show no real production (loss rates > growth rates), ATM will then "turn off" the algal production components of the model and proceed with the major calibration effort without the algal production factors working. The Calibration Report will describe this testing and the conclusions reached.

Concerning **BOD**, it was mentioned that the inhibitor in the BOD test may have suppressed the CBOD5 values. The BOD values were noticeably different during Week 2 of the sampling. The group did not know of a reason for this. ATM will flag the Week

2 BOD values to identify their influence on the averages over the sampling period. ATM will use the BOD5 instream data to apply the F ratios.

Concerning the **marshes**, ATM and USFWS ecologists have delineated drainage basins and obtained elevations for the intertidal marshes between the Houlihan Bridge and I-95. The loadings from these marshes appear to be a major contributor to the BOD loading in the estuary. To ensure the best information is included in the H&S and D.O. Models, ATM will compare (1) the intertidal volumes passing through the tidal creeks based on the drainage basins and marsh elevations developed by the ecologists, and (2) the volumes for those creeks that as they are now configured in the H&S Model.

Concerning **Longitudinal Profiles**, the data showed what the reviewers expected.

Concerning **SOD**, we have data for four locations. Because of the similarities in sediment characteristics (high fines content) and the high shoaling rates in both locations, the group agreed to apply the SOD values measured in the Kings Island Turning Basin to the Sediment Basin.

Concerning **Instream D.O.**, to follow the Expectations Document, ATM will calibrate to both D.O. and D.O. deficit. We discussed the low D.O. spikes that were observed at slack tides. The D.O. data shows recurring sharp (short term) drops in D.O. at slack tides. This occurs more frequently at stations closer to the ocean. The group agreed that the data appear to be a sampling artifact or probe fouling problem, rather than a natural occurrence. The group agreed that these spikes are most likely not real and should be deleted from the dataset.

5. ATM then discussed the **Loadings**. Flows from upstream and the marshes appear to provide the largest net CBOD and TKN loads to the estuary. On the marshes, ATM has initially split the marshes (vertically) along the length of Back River, grouping Transects 2 & 5 together. With this split, the marshes are separated according to which side of Middle River they fall on. The group recommended ATM reexamine this split to determine whether it should instead be based on marsh types (which correspond to salinity levels). They should do this by examining the data obtained during the Tidal Wetland Studies and consulting with the ecologists that obtained that data. Dividing the marsh based on salinity would generally separate the marsh (horizontally) into types as one moved up the river, with the same type generally occurring on both sides of the river. ATM will also check with the ecologists from the Tidal Wetland Studies for values on the productivity of the marshes. This would be used as a check on the appropriateness of the production values used in the marsh loadings. The Redfield Ratio (N-P-K in phytoplankton) was suggested as a starting point for carbon ratios for marsh vegetation. It was observed that the Redfield Ratio was based on aquatic plants, and that upland plants possess a higher carbon ratio.

6. ATM then discussed the **Boundary Conditions**. The group provided no decisions or guidance.

7. ATM then discussed the Coefficients. ATM will restart the calibration using median literature values.

8. We then briefly discussed the availability of the model after it is calibrated. ATM agreed to have an answer by 23 May for both the Corps (availability of a version with the calibration locked) and EPA (availability of a version where all calibration parameters can be changed).

9. One footnote to the meeting summary is that the Corps did receive the joint letter from SC and GA dated 1 May 2003 concerning model application runs. I have attached a copy of that letter to this summary.

10. Another footnote (as a reminder) is this paragraph from the summary from our September 02 meeting:

We then discussed the parameters that the agencies believe will need to be evaluated in the EIS. The items include the following:

- Dissolved Oxygen
- Temperature
- Mixing zone of point sources
- Assimilative capacity of Dissolved Oxygen in the harbor
- Chlorides at Abercorn Creek

Attachment

William Bailey
Environmental Resources Branch

SAVANNAH HARBOR EXPANSION PROJECT
INTERAGENCY COORDINATION
ON
WATER QUALITY

MAY 8, 2003

AGENDA

MORNING

D.O. Characterization Report

ATM (2 hours)

AFTERNOON

“Base Case” Conditions for Calibration

ATM lead

- Boundary Conditions
- Loading
- Constants & Coefficients

Acceptability Criteria/Goals

COE lead

Schedule for completion of D.O. Model

ATM

Application of the models

ATM

- Time & costs per run (including analysis)
- SH Expansion, Ecosystem Restoration, TMDL, and other projects



Georgia Department of Natural Resources
 Environmental Protection Division, Water Protection Branch
 4220 International Parkway, Suite 101, Atlanta, Georgia 30354
 Alan W. Hallum, Branch Chief
 404/675-6232
 FAX: 404/675-6247

May 1, 2003

Mr. David V. Schmidt
 Chief, Planning Division
 Savannah District, Corps of Engineers
 Department of the Army
 P. O. Box 889
 Savannah, Georgia 31402-0889

Dear Mr. Schmidt:

In a letter dated 15 October 2002 you requested that the States identify conditions to be represented by the Savannah Harbor Model when used to evaluate water quality impacts of the proposed harbor deepening project. These included: model critical conditions, specific model simulations needed, and guidelines for the presentation of model results.

Staff members from the South Carolina Department of Health and Environmental Control (SCDHEC) and the Georgia Environmental Protection Division (GAEPD) met to consider this request and formulate our response which will be delivered in two phases. The Phase I response, included in this letter, represents those we can state now without further information. The Phase II response, to be delivered at a later date, requires: (1) an understanding of the dissolved oxygen standard which has not yet been proposed; (2) a finalized Harbor model which has not yet been fully calibrated; and, (3) an opportunity for our staff to examine the new standard with respect to model capabilities and the specific issues to be addressed.

This Phase I response focuses on model critical conditions reflected in State regulations and implemented through standard modeling practices to examine the protection of water quality standards and develop TMDLs and NPDES permit limits. In a letter to USEPA Region 4, dated 4 May 2000, SCDHEC and GAEPD outlined an initial set of critical conditions to be used for the analysis of water quality issues for both Savannah River and Harbor. We confirm those conditions and, as an update, add the following:

- The upstream boundary conditions for the Harbor Model will be determined by the States' Savannah River Model.
- Kinetic rate parameters, sediment oxygen demand, and non point source conditions determined during Harbor Model calibration shall be used in the critical conditions model.

- The Corps has recently proposed a modification to the drought operation plan for Thurmond Dam. The States reserve the right to redefine critical minimum flows, earlier described in our 4 May 2000 letter, in response to any changes in minimum flows from Thurmond Dam.
- All of our responses to your request relate exclusively to the use of the River and Harbor models and those issues that can be directly addressed with these models.


SCDHEC and GAEPD will continue to work and communicate together on issues of joint concern for Savannah River and Harbor. Additional specifications, especially those involving the Phase II response, will be provided by our combined staffs when appropriate.

Sincerely,



Alton Boozer, Chief
Bureau of Water
SCDHEC

Sincerely,



Alan W. Hallum, Chief
Water Protection Branch
GAEPD

CESAS-PD-E

24 June 03

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 18 June Interagency Meeting on Evaluation of Impacts to
Water Quality

1. Attendees:

USGS	Paul Conrads
GA DNR-EPD:	Roy Burke III
	Paul Lamarre
SC DHEC	Wade Cantrell
ATM/GPA:	Danny Mendelsohn, Steve Peene & Bo Ellis
LGE/GPA:	Larry Keegan
COE:	Doug Plachy
	Bill Bailey
EPA	William Melville

2. The meeting was held to allow ATM to provide a status report on their calibration efforts on the D.O. Model.

3. I opened the meeting by stating that we would handle issues recently raised by Jim Greenfield (EPA) about vertical mixing and Richardson Number after the presentation by ATM. I felt we needed to first allow ATM to tell us what they wanted; secondly, to provide an opportunity for the agencies to give ATM any guidance on items that may come up; and lastly address Jim's concerns, if possible, that day. We agreed that Steve Peene would contact Jim Greenfield directly to work out acceptable wording for a letter on access to the calibrated models, then provide that letter to the Corps.

4. Danny began by discussing a **comparison of salinity movement in the BFHYDRO and BFWASP models**. The peaks show BFWASP to be about 1 ppt higher in the Front River. The peaks and troughs were <1 ppt lower in BFWASP in the Back River. USGS requested ATM display this information for the full length (70 days) of model runs.

5. Danny then discussed the **Upstream Boundary**. He used the EPA-RIV1 output as input to the Hydro Model. Results for Ammonia, Phosphate, D.O. and Organic Phosphate looked OK. (There was no field data to compare computed values of Organic Phosphate.) For Nitrate, the data showed values of about 0.2 mg/L, while the model predicted values of about 0.4 mg/L. ATM is concerned that the EPA model is too high for this parameter. For CBOD, the predictions appear to match the data, but ATM thinks the EPA model is too high.

Roy Burke expressed that the RIV1 Model was developed in a data-poor environment. It was based on 1990/1991 data and a calibration performed at that time. He believes that model captures the trends well, but may not match absolute values well. For Nitrate and CBOD, he felt it would be OK to use either the RIV1 model results or the observed data. ATM should explain the rationale for their choice. USGS recommended giving priority to the collected data rather than relying on the RIV1 predictions.

6. Danny then discussed **loadings**. The marshes are the largest factor in Nitrate and BOD. Point sources and the downstream boundary are small factors.

7. Danny then reviewed the **point source loads**. No particular issues were raised.

8. Danny then discussed **vertical mixing**. Danny and Steve stated that information on this issue had been discussed before and they thought we had reached resolution. Danny stated that vertical mixing was calculated within the Hydro Model. It uses the amount of tidal energy. Only the non-linear momentum term is turned off in the model. ATM had evaluated that issue previously and concluded this parameter did not affect the model results other than the time step. Danny stated this had been described in a paper that had received peer review. After the meeting he provided the paper to USGS, who distributed it to the rest of the Federal agencies. We requested ATM provide their explanation of what the model did for both vertical mixing and the Richardson number to Jim Greenfield prior to completing the Hydro Model Calibration Report, and then include that information in the Calibration Report. The explanation should state why ATM believes the model will function accurately when changes in bathymetry are considered.

9. Concerning model results, ATM is rethinking the marsh boundary condition. They proposed a population limiting approach. An alternate is the Area Flux Method. The group did not recommend one approach over the other. They just requested ATM describe what they selected and provide a rationale for their choice.

10. We concluded by briefly discussing the multiple CBOD decay rates. I stated that based on the recent letters from GADNR-EPD and SCDHEC, ATM was to proceed with the original plan – which was to attempt to calibrate using a single CBOD decay rate. If they were unsuccessful in obtaining good calibration, ATM would then use two decay rates. ATM has already built into the model the capability to use a second CBOD decay rate.

11. The next meeting will be on August 20th to review the Draft D.O. Calibration Report. That report is to be provided to the agencies on August 1st.

William Bailey
Environmental Resources Branch

CESAS-PD-E

3 September 2003

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 20 August Joint Meeting on Review of Draft D.O. Model
Calibration Report

1. Attendees:

ATM:	Daniel Mendelsohn, Steve Peene & Bo Ellis
Hydroqual:	Tom Gallagher
LGE:	Larry Keegan
GPA:	Hope Moorer
City of Sav'h:	Bob Scanlon & Larry Neal
GA DNR-EPD:	Roy Burke & Paul Lamarre
SC DHEC	Wade Cantrell & Larry Turner
EPA:	Jim Greenfield
USGS:	Paul Conrads
CE-ERDC:	Sung-Chan Kim
CESAS:	Doug Plachy & Bill Bailey
2. The Agenda is attached.
3. The following is a summary of the discussion and does not include all the information that was presented or all comments made during the discussion.
4. The City provided its comments first. Larry Neal spoke for the City. He led off by stating that the City's main goal is for the model to be an accurate and defensible representation of the point source dischargers' effects on the D.O. Deficit in the harbor. He then provided the following specific comments:
 - Model appears to be sensitive to CBOD decay rates.
 - Would like to see sensitivity of CBOD loading at Clio and the ocean boundary.
 - ATM should look at the salinity levels in the samples collected at Fort Pulaski.
 - It appears that the model has too much BOD at the upper end (boundary) and too little at the lower end (boundary).
 - GADNR-EPD stated that there are possible additional sources of BOD loads from the saltmarshes in the lower portion of the estuary. In SC, from marshes around Wright River and New River. In GA, from marshes around Wilmington River and South Channel. This is possible justification for adding more BOD in the lower end of the model.

- Concerned about ATM using a single CBOD decay rate for each point source discharge, marshes, etc.
 - GADNR-EPD stated that the following actions could be pursued to obtain an acceptable calibration: (1) adjust the long term decay rates from the few values that were measured, and (2) use spatially variable rates.
- Would like to see a test of the sensitivity of the f-ratio of point sources and marshes.
 - Hydroqual suggested using a unit-response approach to identify the effect of changes in f-ratios.

5. GADNR-EPD provided its comments next. Roy started by questioning the purpose of this review. I stated that this review of the Draft Report was an opportunity to suggest revisions, while the review of the Final Report will be for determining whether the model is Acceptable or Not Acceptable for its proposed use. We would have a Comment/Response round on the Final Report before seeking the agency's position on the model.

Roy said that the time series for D.O. indicate that the model currently doesn't capture the range of highs and lows in the data. He stated that the diurnal highs and lows indicate to him that the D.O. processes are tidally-driven rather than being driven by photosynthesis. It appears that there are equal errors of D.O. on the surface and bottom, indicting to him that there is not a vertical mixing problem. The differences in D.O. between the surface and the bottom appear to be more of a longitudinal effect. He called this area of D.O. sag in the harbor another example of a "coastal big dipper", an effect that can be observed in other larger coastal rivers.

EPA requested that ATM show a comparison of model and data with the 24-hour and 36-hour synoptic sampling that was performed of both salinity and D.O..

6. SCDHEC had no comments at this time.

7. I followed with the comments from CESAS.

- Talked through the written comments that we already provided to ATM.
- Requested that the smaller data reports (such as EPA's SOD Report) referenced in the Calibration Report be included on the CD containing the Calibration Report.
- ATM will at a minimum conduct a sensitivity analysis of the effects of using a dynamic offshore boundary. They will review the results of USGS's ANN work on the offshore boundary if it becomes available in time. ATM will review the USGS ANN work and determine how it could be included in the D.O. Model calibration. They will inform the Corps of their position. The possible extent to which ATM could include that ANN information will be greatly influenced by when the USGS completes that work.

8. The USGS was next. Paul gave the following specific comments in addition to the written ones already provided to ATM:

- The report needed to better describe how and why the modelers made decisions during the model development process.
- ATM should explain their modeling philosophy (trying to match at GPA17 and Fort Pulaski; adjusted values at the boundaries to match data at those locations, etc.).
- Should show the sensitivity of reaeration rates.

9. The CE-ERDC was next. Dr. Kim gave the following specific comments in addition to the written ones already provided to ATM:

- The report should describe the range of flows covered by the calibration and verification data.
 - Hydroqual recommended that the report show the range of all important environmental conditions (tidal range, etc.)
- The vertical mixing issue is critical to resolve before ERDC could recommend use of the model for evaluation of harbor deepening scenarios.

10. EPA was last. In addition to the written comments already provided to ATM, Jim expressed a few general comments. One was that the report needed to include more to make the model defensible. Any changes to the model code should be described, explained and justified. Was the advection term turned off or not? If so, why is that not important to the model? EPA would like faster run times for these models. He questioned whether the coarser grid – with 4-8X faster run time – could be used to conduct some screening of alternatives.

11. We then discussed vertical mixing. The agencies stated that a better explanation was needed of (1) what was done, (2) why those choices were made, and (3) why the procedure is acceptable for application on a proposed harbor deepening project.

12. We discussed the upcoming schedule for production of the Final Calibration Report and agency review. We agreed that the Final Calibration Report for the Hydrodynamic & Salinity Model would be completed at the same time as the one for the D.O. Model. For a schedule, the group agreed to 30 days for the review, 30 days for the comment/response resolution, and then 15-30 days to get a written agency position. EPA indicated that if the reports become available later than scheduled, they would not be as available to review the reports, resulting in a longer review time for them. At the time, the D.O. Model was scheduled for completion on 3 October. ATM agreed to review the comments and inform GPA when they would complete the reports. Their initial reaction was that the comments did not constitute a change in scope from the work they had been contracted to perform. ATM has since notified GPA and the Corps that the reports will be sent out on 24 October. That will likely extend the review time beyond 30 days.

William Bailey
Environmental Resources Branch

**SAVANNAH HARBOR EXPANSION PROJECT
AND
SAVANNAH HARBOR
ECOSYSTEM RESTORATION PROJECT**

**JOINT REVIEW OF
DRAFT D.O. MODEL CALIBRATION REPORT**

AUGUST 20, 2003

AGENDA

OPENING & INTRODUCTIONS

CESAS

REVIEW OF PRELIMINARY COMMENTS

Reviewers

- City of Savannah
- GA DNR-EPD
- SC DHEC
- CESAS
- USGS
- CE-ERDC
- EPA

VERTICAL MIXING IN HYDRO MODEL

CESAS

REVIEW OF SCHEDULE AND REQUIREMENTS

CESAS

NEXT STEPS

- Incorporation of comments

LGE

NOTE: There will be no presentation by ATM on the D.O. Model

CESAS-PD-E

7 March 04

Revised 15 March 04

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 4 March Meeting of the Interagency Water Quality Team

1. Attendees:

USGS	Paul Conrads
GA DNR-EPD:	Roy Burke III & Paul Lamarre
SC DHEC	Wade Cantrell & Larry Turner
COE:	Doug Plachy; Bill Bailey & Ken Derickson
	Sung-Chan Kim
EPA	Jim Greenfield & Steve Whitlock
Harbor Committee	Larry Neal & Margaret Tanner
2. The meeting was held to determine whether those reviewing the ATM/GPA Final Calibration Reports for the Hydrodynamic & Salinity and Dissolved Oxygen Models need additional information or clarifications before they are able to reach their decisions on the models.
3. I opened the meeting by reviewing the purpose for the meeting and providing an agenda. I reiterated that these two documents are intended to be ATM's final reports on development of their models and that the Project is not envisioning another round of Comment / Response with the reviewers. I asked that each agency reviewer summarize their findings and explain any concerns they may have so far.
4. Dr. Kim (USACE-ERDC) led off the discussion. He explained that transport of mass is very important in the models. For the vertical mixing used in BFHYDRO, the report states that the diffusivity is based on the tidal range. He stated that the formulas used to calculate the diffusivity are empirical – and are not physics based. The equations use two sets of coefficients, one developed from 1997 data and the other from 1999, which was not documented in the report. Because of the inconsistent method used to calculate the diffusivity, Dr. Kim believes the application of the models should be limited to only those time periods over which the data was collected.

Dr. Kim also stated that the Hindcast evaluation was not conducted properly. It did not prove that the vertical mixing approach works for different channel depths.

Because of these two items, Dr. Kim believes that the mixing scheme is not defensible for extrapolation beyond conditions observed during the data collection periods (both in time and in bathymetry).

5. Paul Conrads (USGS) that described the findings of his review of the vertical mixing described in Appendix Q. He explained that the mixing was driven by the tidal range, and was calculated using Equation 5. He described how the equation was implemented – that there were two sets of coefficients for the different years over which ATM collected data. The manner in which the equation was implemented was not described in the ATM report, but instead in a spreadsheet that ATM subsequently provided to Paul. He explained that offsets were added to the values calculated for mixing. Offsets were added twice, once within the formula and another time to the highest of the values calculated from the two equations.

Paul explained some sensitivity work he had conducted on the tidal smoothing that ATM had used. He showed how the order in which the smoothing is performed resulted in a 14 percent difference in the model results at the peaks. The conclusion was that this model results are very sensitive to the vertical mixing approach.

Paul mentioned that he had consulted other modelers within USGS in the review of the vertical mixing approach. After their independent review of the model, they also expressed strong reservations about the defensibility of the vertical mixing when used for making predictions of harbor deepening.

6. Jim Greenfield (EPA Region 4) then explained his findings. He started by saying that he had brought in a modeler from EPA's research lab in Athens to review the model. That reviewer had expressed concerns about the vertical mixing approach used in the model. Jim explained that the Hydro Model used a backwater calculation for the riverine portion of the model domain. He said that WQMAP using this river formulation had not been applied previously in riverine conditions and not previously defended. He stated that the procedures used were not sufficiently well defined in these Final Reports for him to be able to sufficiently defend results produced by the model.

Jim stated that in the D.O. Model, the SOD rates were quite high and that the reports did not sufficiently justify the BOD decay rates that were used.

He stated that the reports did not fully describe how or why ATM decided to use only 2/3 of the data that they had previously provided in the WRDB database. That database had about 31,000 records, but ATM used on 18,000 in their present reports.

7. Roy Burke (GADNR-CRD) then stated his findings. He reminded the group that he thought one goal was to develop a "legacy model" that the states could use to evaluate other proposed actions. He believes that the ATM models are too complicated and take too long to run. Roy praised the Federal agencies for their detailed review of the vertical mixing. He stated that any other model must perform equally as well, or better.

Concerning BOD, he said that (1) the model did not describe the marsh loading well, (2) that the instream decay rates had been changed from 0.06 to 0.09, with insufficient explanation given, and (3) that the marsh loads are very important in this system.

He said that the calibration appeared to be OK, except for the main river section where D.O. problems occur (Front River from Fort Jackson to the Houlihan Bridge). He said the balance between SOD and reaeration were not described well.

Roy stated that the State of Georgia had been left out of meetings that the Federal agencies had concerning this model. He believes the State should have been informed of those meetings and provided an opportunity to participate in those technical discussions on the models. He requested the States be informed in the future about scheduled meetings, their purposes, and then their outcomes. He apologized for leaving him out and said that although the Federal Cooperating Agencies felt a high level of responsibility for the conduct of the technical work performed as part of the project, we would include him in the future. To provide an example of work that had occurred during what the State perceived as a long period of inactivity (silence), Roy mentioned the Expectations Document that the Federal agencies had prepared in 2001. For ready reference, he requested a copy of that document, which we distributed during the meeting.

Roy concluded by stating that ATM's Final Reports did not address many of the issues that were discussed at the August 2003 meeting with ATM and GPA.

8. For the purposes of this record, I will continue with the review comments, although the group heard a presentation on another topic at this point in the meeting.

9. Larry Turner (SC DHEC) then provided some of their thoughts on the models. Larry concurred in the importance of the ability of the States to use the model in the future. He supported Roy Burke's desire to be kept in the loop on review of the models, but also expressed staff limitations and did not want to be overwhelmed with just this project. He explained that salinity in the National Wildlife Refuge is important to SC, as is any area where a change in use would occur as a result of the project. He reiterated that salinity was a very important parameter in this system.

Wade Cantrell (SC DHEC) then continued by stating that the reports did not sufficiently describe why the CBOD decay rates of 0.09 were used, when previous meetings a value of 0.06 had been discussed.

Wade said that the reports did not sufficiently support why 10 percent of additional flow had been added to those recorded at Clyo. He said it appeared that in 1999 that the flow volumes used in the model may have been reduced by 10 percent. The reduction is about 10 percent at the beginning of the 1999 simulation, but then it declines steadily to 0 percent at the end of the simulation, when the model inflow equals measured flow at Clyo.

10. Larry Neal (MACTEC for the Harbor Committee) then discussed his review comments. He said he had reviewed the D.O. Calibration Report only and had trusted the Federal and State agencies to assess the adequacy of the Hydro & Salinity Model.

Larry suggested using the CBOD measured decay rates. The measured range was 0.03 to 0.08. He believes the 0.09 decay rate used in the model substantially overstates the impact of the point source dischargers which have much lower measured decay rates.

Larry said that sensitivity tests are needed for CBOD levels used for the offshore boundary.

Larry stated that the reaeration rates are probably too high. He stated that the empirical reaeration equations are based on tidally averaged velocity and mean depth. He suspected that the model may incorrectly use instantaneous velocities and depths, rather than averaged ones. The reaeration rates in the report range from 0.35 to 1.6, while those in EPA literature range from 0.08 to 0.65 for tidal rivers and estuaries, with the rates calculated in this model about 3 to 4X those used in other tidal river and estuarine projects (including Savannah).

He believes the D.O. calibration started from the wrong point, levels of D.O. in the system that are too high and not realistic. He believes the modelers then adjusted SOD, the offshore boundary values, and the BOD decay rates to improperly balance the D.O. in the system. He stated that he found no sensitivity testing on ocean boundary BOD or percent DO saturation assumption of 75 percent.

During application, Larry recommended not using a combination of all critical conditions, since the probability of those events occurring simultaneously would be very small.

11. I then asked each reviewer if they needed any more information from ATM/GPA before they could reach their conclusions about these models. They uniformly said "No".

I agreed to send the agencies an email restating the question(s) that I wanted each agency to answer concerning the ATM/GPA models.

12. I asked each reviewer to state their overall assessment about the models at this time. This is a summary of their responses:

EPA

- The vertical mixing approach makes the Hydro Model unacceptable.

USACE-ERDC

- The vertical mixing approach in the Hydro Model is unacceptable.
- The approach used limits the application to the 1997 and 1999 data collection periods.
- Hydro Model could be used to evaluate water surface elevation and velocities, generally within the range of flows observed during the data collection periods.
- The approach used renders the application unusable to evaluate the effects of changes in channel depth.

USGS

- The vertical mixing approach in the Hydro Model is unacceptable.
- Hydro Model could be used to evaluate water surface elevation within the general range of flows observed during the data collection periods.

Harbor Committee

- The D.O. calibration is unacceptable.
- They will rely on the Federal and State agencies for the Hydro Model.

SC DHEC

- Based on the questions raised concerning the defensibility of the vertical mixing scheme and the conclusions of the Federal review agencies, the AUM Models cannot be used for the expansion project.

GADNR-EPD

- The BOD mass balance is insufficiently documented.
- The D.O. Model is unacceptable in its defensibility.

13. The group heard a presentation by EPA's contractor (Steve Davie from TetraTech) on the Plan B Hydro Model. They distributed a Calibration Report for that model. TetraTech had worked with both a coarse and a fine grid. The coarse grid performed reasonably well, so the statistics in the Calibration Report are based on use of that coarse grid. The coarse grid is 6 layers deep and 3 wide in the navigation channel. The document describes their efforts and overall findings with the fine grid. They extended the ocean boundary out to 18 miles from the entrance.

Steve described the work they had done to include the marsh volumes in the model. They adjusted the shape of the marsh cells to ensure they did not go dry, but maintained the total flow volume into those cells.

For vertical mixing, they adjusted one parameter from the standard settings. That parameter is the one that the technical paper describing the mixing approach said could be adjusted without compromising the underlying assumptions. Their adjustment is within the bounds described in the original technical paper.

For salinity at the offshore boundary, they evaluated many different levels and approaches. They settled on a constant 33.5 at the boundary, which matched the observed data at Fort Pulaski well.

For Calibration, they used a single run covering from 1996 through 1999. The statistics are reported for the entire 4-year period, as well as for the 2-week periods described in the Expectations Document. They did not add to the river flows measured at Clio. For their Validation, they used the same set of input data, but compared the model results to a different set of observations – those recorded at the continuously recording USGS stations. TetraTech's Hydro Model with a coarse grid takes about 3 hours to do a 12-month run, 11 hours for a 4-year run. The fine grid takes about 6 hours for a 12-month run.

14. EPA provided the group with a brief update on the status of the RIV1 model. EPA is continuing to add recent point source discharge data into the model. ATM used the RIV1 model for their 1999 calibration runs. EPA intends on using the RIV1 model for the 1997-2000 period during calibration of their D.O. Model.

15. I agreed to review the previous agency letters and let the reviewers know where the need that I had quoted in my Feb 20 email for Evaluation of Impacts to Mixing Zones for Point Source originated.

16. Concerning the scheduling of future work and coordination, EPA expects to have their D.O. Model complete by the end of May. EPA would like to meet fairly regularly between now and then to keep the group of the status of that model development process. The group agreed to meet back at EPA at 10:00 on April 15th. Subsequently, that date was revised to April 20th.

I requested the reviewers send me an email with their preliminary findings on TetraTech's Hydro Model Calibration Report **by the end of March**.

Savannah District would like an agency letter expressing their position on the ATM/GPA models **by 5 April**. The Project's Executive Management Group (heads of EPA, USFWS, NMFS, Savannah District, and GPA) will be meeting on 7 April to discuss these models and one other issue.

William Bailey
Environmental Resources Branch

CESAS-PD-E

31 March 04

Rev 10 May 04

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 31 March Meeting of the Interagency Water Quality Team

- I. Attendees:
- | | |
|------------------|--|
| USGS | Paul Conrads |
| GA DNR-EPD: | Roy Burke III & Paul Lamarre |
| SC DHEC | Larry Turner |
| COE-Savannah | Dan Parrott; Bill Bailey & Ken Derickson |
| COE-ERDC | Sung-Chan Kim |
| EPA | Jim Greenfield & Steve Whitlock |
| Harbor Committee | Larry Neal |
| GPA | David Schaller & Hope Moorner |
| LGE | Larry Keegan |
| ATM | Tom Schanze, Steve Peene, Bo Ellis, & Danny Mendelsohn |

2 The meeting was held to provide ATM an opportunity to explain the vertical mixing approach used in their Hydrodynamic & Salinity Model. Agency reviewers had provided comments on the vertical mixing approach and ATM had provided written responses to those comments. This face-to-face meeting was to insure the agencies are making their review decisions based on correct information and a correct understanding of the written documents.

3 I opened the meeting by stating that we had all invested a lot of time and effort into these models, that the Final Reports had taken much hard work, and that hard decisions now had to be made on the acceptability of the models. I stated that all attendees were present because we are professionals concerned about a quality product. The meeting was to review only the vertical mixing comments on the models.

4 Steve Peene gave an **overview**. He stated that ATM had developed the vertical mixing equations for the 1997 model. ATM did not alter those equations when they began their Tier II calibration efforts. They applied the 1997-based equations to the 1999 data and found that they reasonably reproduced the 1999 dataset. After reaching that conclusion, they did not adjust the equations to calibrate to the 1999 data. ATM used the same basic set of equations in both the calibration and validation efforts. They applied the 0.0001 offset in January 2004 to marginally increase the performance of the H&S Model. That same offset was used in both the calibration and validation efforts. Steve stated that numerous other projects had used an empirical formulation for vertical mixing.

5 Steve then opened the floor up to any **general questions**. Dr. Kim stated that based on the charts ATM provided, ATM would likely have developed a different set of constants for the vertical mixing equation if they had started with the 1999 data. The need for a 2-component equation such as ATM developed would not have been obvious based only on the 1999 data. He expressed concern that the model validation still contained a mixture of 1999 and 1997-derived data/constants. ATM responded by saying that because of the drought, 1999 was an odd-ball year and that 1997 was more of a normal year in terms of flows. They had been fortuitous in having data from 1997 to produce a more comprehensive foundation from which to develop the equation constants. They stated that they should not be penalized for having a better foundation upon which to develop the constants. ATM stated that in their response-to-comments they evaluated the model's performance over other time periods: 1992, and the entire years of 1997 and 1999. They feel that this work demonstrates that the equation applies well to a broader set of conditions than just those observed during the data collection periods.

I asked whether the other models that ATM had listed as successfully using an empirical approach had been applied to address changing bathymetry (harbor deepening) or were they TMDL-type projects evaluating changes in water quality inputs. ATM did not know if any had been used to address the issues facing this project.

Dr. Kim did not believe ATM had used a true zero order model to calculate vertical eddy viscosity. Such a model is used for each of several vertical layers, while ATM's approach applied a single number throughout the entire water column. ATM concurred.

Dr. Kim questioned the relationships for the Richardson Number developed from the data shown in Figure 9 (page Q-25) and Figure 18 (page Q-31). He did not think that one could easily conclude that the data from the two years, as expressed in the two figures, were from the same population. The relationship developed to represent each year did not match each other well. He said that with the variability in the data, the relationship that was developed was not reliable – it would have a wide confidence interval. He questioned whether using that equation was truly representative of that entire population. ATM stated that the model did not use the relationship developed from those figures as an input.

ATM believes that the model is good for flows between 5,000 and 20,000 CFS. No impact analyses have been requested outside that range.

6 Dr. Kim stated that after having read ATM's responses to his comments, he still could not defend the approach to determine eddy diffusivity. ATM stated that the approach they used is based upon and represents well the observed data and patterns in the data.

7. ATM said they feel that performance is an important part of defensibility when using an empirical approach. The group stated that the defensibility of the empirical approach is critical and needed to be addressed before considering how well a model may represent observed data. The Federal agencies had decided that it would be best to conduct a phased review (defensibility before performance) prior to release of the Jan 04 Calibration Reports.

8. The group concluded that **further efforts to refine the empirical approach** will not likely result in the model becoming acceptable. ATM said they could replace the empirical approach for vertical mixing with a physics-based approach. The group believes that such a replacement would provide the basis for an acceptable model.

9. GPA asked **whether the reviewers felt the D.O. Model was or could become acceptable**. I went around the table asking for the reviewers' opinions on this question.

GADNR stated that they expressed their concerns about the D.O. Model at the last meeting. These concerns included the reaeration rates, SOD, and BOD mass loading. The model and calibration as described in the Jan 04 Calibration Report would not be acceptable. They believe there is still a significant amount of work ahead to make the D.O. Model and its calibration satisfactory.

SCDHEC stated that they have not been able to perform sufficient review to make a determination.

The Harbor Committee stated that they believe the reaeration rates are 3-4 times too high and that ATM was then forced to make several counter-balancing adjustments to correct that situation. They believe the BOD balance is not good. They have numerous questions about the model formulation and calibration. They are resistant to adopt the model as presented in the Jan 04 Calibration Report, but they believe they can help in identifying realistic and defensible values to use in the calibration.

USGS stated that their review had centered around the technical defensibility of the vertical mixing routine in the model, and that the approach was presently unacceptable. In addition, there was concern with how the riverine dynamics were handled in the model.

EPA stated that their review had centered on the technical defensibility of the model, and that the approach used by ATM was presently unacceptable. EPA also had questions on the data portion of the report and how marsh issues were handled. They concurred that there were D.O. issues, but believed that those could be fixed if the Hydro Model was calibrated correctly and was technically defensible. With sufficient time and manpower the D.O. Model most likely could be made acceptable, but until the Hydro Model fixed it would not be fruitful to start on recalibration of the D.O. Model.

10. EPA stated that they are **pursuing development of the Plan B model for their Dissolved Oxygen TMDL**. They expect to have the D.O. Model developed by June and have a draft TMDL out for review in August. Jim stated that the Plan B Model would be acceptable for use in the Expansion Project, even though developed for the TMDL. He said that the Plan B Model would be designed to meet the Expectations Document, as had the ATM (Plan A) Model.

11. As a summary, the group reached three major **conclusions**:
- (A) The empirical vertical mixing approach is not acceptable for use on the Expansion Project. Further refinement of this approach is not likely to make it acceptable for such use.
 - (B) ATM could replace the empirical approach with a physics-based approach. Assuming this is successful, the agencies would then evaluate in detail the performance of the H&S and D.O. Models.
 - (C) There are several concerns about the formulation and calibration of the D.O. Model.

12. I identified the following **next actions**:

Plan A

Agency letter on acceptability of the H&S and DO Models 5 April

Plan B

Email from technical reviewers on preliminary assessment of Hydro Model 31 March
 Agency letter on acceptability of H&S Model 30 April
 Meeting of Executive Management Group 7 April

// ss //

William Bailey
 Environmental Resources Branch

CESAS-PD-E

22 April 04

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 20 April Meeting of the Interagency Water Quality Team

1. Attendees:

GA DNR-EPD	Roy Burke III & Paul Lamarre
SC DHEC	Wade Cantrell
COE	Bill Bailey
COE-ERDC	Joe Letter
EPA	Jim Greenfield & Steve Whitlock
Harbor Committee	Larry Neal & Margaret Tanner
USGS	Paul Conrads (by phone)
TetraTech	Steve Davie
2. The meeting was held to review the status of EPA's efforts to develop the Plan B D.O. Model. The group also discussed the review goals for the Plan B Hydro Model. Savannah District would like a letter from each agency expressing their position on the EFDC (Plan B) Hydro Model by the end of April. The Expansion Project's Executive Management Group will be meeting in mid-May to decide whether to pursue the Plan A or Plan B models to evaluate impacts on the Expansion Project.
3. Jim Greenfield opened the meeting by distributing and discussing a revised agenda. We discussed EPA's goals for their TMDL analysis and setting of a D.O. WQ standard for the State of Georgia. We also discussed the Corps need to develop or select and then apply models to identify expected impacts from a harbor deepening project. We agreed that EPA would take the lead for issues concerning TMDL development and technical development of the EFDC Models. The Corps would take the lead on issues concerning the application of the models to evaluate harbor deepening.
4. We discussed whether the group should adopt any **new processes** for their coordination on these efforts this summer. USGS suggested keeping a running list of "Unresolved Issues". EPA said they intend to prepare a series of "Technical Notes" to document how the group reaches decisions on specific issues as they move along.
5. We discussed the **coarse and fine grids for the EFDC model**. EPA said the coarse grid was acceptable to them for use on the TMDL and on the water quality issues in the Expansion Project. Joe Letter thought that a finer grid would be necessary to catch subtle changes that could be produced by proposed changes in the harbor bathymetry. He agreed that a coarse grid could be used as a screening tool. He suggested using a fine grid to tune the predictions of a coarse grid if model run times become an important factor.

6. EPA stated that they were working on both WASP 6.1 and WASP 7.0. If they could get WASP 7.0 working in time, they would use that in their final calibration. If it wasn't working acceptably when the model development time is complete, EPA will use the WASP 6.1 version for their work.

7. We discussed **Boundary Conditions**. Concerning CBOD_u, MACTEC stated that they had completed the analyses of the latest samples collected near the harbor entrance. They would electronically distribute the results. In response to a question from the Corps, the group confirmed that model application runs should use the permit limits from the upstream dischargers, as well as those from those in the harbor.

8. We discussed **Loadings**. Concerning temperature, EPA will first use a sensitivity analysis to determine the sensitivity of the transport to this parameter. MACTEC said that one could back into a temperature loading for a power plant from the energy production and the heat rejection of the equipment. GA stated that we may need to consider heat loads under full permit limits in a critical conditions analysis.

Concerning the marshes, GA asked TetraTech to further analyze ATM's data to try to determine SOD levels from the marshes. This could assist in a further review of the BOD loads from the marshes.

EPA asked the group to review their files and provide LTBOD information related to the decision to use a $K = 0.06$. The group thought that issue was discussed after May 2000.

The City requested an additional look at multiple BOD decay rates. They said effluent from the paper plants has a $K = 0.02$ and produces a large total load, while the model assumes a $K = 0.06$ for the entire river.

The City stated that the Stone Container plant went back on line in 2002 with one production line. Its effluent is blended with that from Savannah Sugar and Port Wentworth municipal wastewater.

9. EPA said it would be using the mid to end of August 1999 period for the sensitivity analyses since the data are more complete over that period of time.

10. SCDHEC will pick a station in SC water that it wants EPA to run the model to compare the results to SC WQ standards.

11. Concerning **GA's review of the EFDC Hydro Model**, they stated that they were using the same review goals as they had used for the Plan A ATM Models. They reviewed their previous concerns about Plan B's performance on water surface elevation, flow, currents, and salinity. TetraTech will respond to GADNR's concerns in writing before the end of April.

GADNR stated that the "Expectations" were correctly "goals" and not criteria. ERDC concurred that the "Expectations" set quite a high bar for performance. All agreed with those characterizations and stated that they expected that when the goals were not met, the modelers would explain why they did not / could not reach those goals.

GADNR noted that the Hydro Model results possessed a phase shift that exceeded > 30 minutes half of the time. TetraTech explained that they wrote Appendix A to address comments that Dr. Billy Johnson had previously made about the Plan A Hydro Model concerning the tidal surge being a progressive vs. a standing wave. GADNR requested TetraTech compare the model results directly with the data.

12. The following day a smaller group reconvened to get more hands-on explanations of the working of the EFDC Hydro Model. Before that discussion got underway, I asked about the **input conditions for model application runs**. Roy Burke explained that GA and SC laws require use of 7Q10 flows before a permit decision can be made. EPA regulations require that dischargers and water withdrawals be examined at permit limits. Roy explained that modelers may conduct a "Natural Conditions" analysis as well as a "Critical Conditions" analysis. In a Natural Conditions analysis, all discharges would be removed, so that the model would indicate the conditions that could occur in a more natural state. I explained that the Corps normally uses a "most likely to occur" approach. Roy agreed that evaluating potential impacts from a harbor deepening using just a "Critical Conditions" approach may not present a complete picture for decision-makers. For application runs on the Expansion Project, I believe the group should identify the model input conditions for both a "most likely to occur" approach and a "Critical Conditions" approach. Roy explained that typically the input conditions for the application runs are determined after a model has been developed and calibrated. I stated that the Corps has been trying to define the input conditions now solely because of a desire to speed the project along – to be able to begin application runs as soon as the agencies agree that a model is acceptably calibrated.

To allow a more informed discussion of this topic EPA / TetraTech should obtain the following information for each discharger and water withdrawal: (A) permit limits, and (B) levels observed during the 1999 calibration period.

// ss //

William Bailey
Environmental Resources Branch

Savannah Harbor Expansion Model Review Meeting
June 16-17, 2005
Savannah Harbor Expansion Interagency Water Quality Team Meeting
June 17, 2005
Tetra Tech, Inc. – Atlanta, GA

Attendees:

Roy Burke, GAEPD
 Paul Lamarre, GAEPD
 Wade Cantrell, SCDHEC
 Bill Bailey, USACE Savannah District
 Joe Hoke, USACE Savannah District
 Jim Greenfield, USEPA Region 4
 Paul Conrads, USGS (via phone)
 Larry Neal, MACTEC
 Margaret Tanner, MACTEC
 Steven Davie, Tetra Tech, Inc.
 Will Anderson, Tetra Tech, Inc.
 Yuri Plis, Tetra Tech, Inc.

Agenda:

1. WASP model – consistency with enhanced grid and status of TMDL process
2. Status of calibration report from Tetra Tech
 - Issues/concerns from Federal and State agencies
 - Dr. Kim's (ITR USACE) comments
 - July 1, 2005 deadline for agency position
3. Application of the models for impact simulations (inputs and outputs)
 - Comments from states and other users

I. Status of TMDL (Jim Greenfield):

- EPA will now use one model for the harbor – enhanced grid
- WQ standard for dissolved oxygen still being developed, EPA headquarters is going to talk to GAEPD about proposing the standard
- SCDHEC will still have to develop a site specific criteria for SC waters
- Recruitment (fish) model will be used to develop the criteria values; being used in the Escatawpa River Estuary for the dissolved oxygen criterion (3.0 g/L); using daily dissolved oxygen values and comparing to acute and chronic limits
- 2004 loads being used to update the TMDL – using July, August, and September average DMR data – Jim send to MACTEC for review
- Riverside Power Plant decommissioned
- Kerr McGee immediate oxygen demand load is now removed
- Need to check heat loads with GA Power (MACTEC to verify this with GA Power)

II. Issues and Concerns on Final Report on Hydrodynamic and Water Quality Models:

1. Discussed Dr. Kim's comments and went around the table discussing issues and concerns from each agency/group represented.
2. Larry Neal summarized his organization's concerns in a handout.
3. The group then had a wide-ranging discussion of that included a number of issues. These are summarized in the next two sub-sections. The first paragraph is the group's attempt to develop categories for the comments that describe the amount of effort expected to address a concern. The second paragraph states the concern and the category of future effort (in bold) expected to address it. These issues should be considered further before using the models to identify impacts of the recommended plan.

Ways to address concerns with the models and the reports

The group categorized the concerns according to the level of action that is appropriate to fully address each concern. The following four categories were developed, roughly in order of the effort expected:

- A** Explain better in the report, no modeling action needed.
 - B** Keep in mind when interpreting the model results.
 - C** Additional sensitivity model runs are needed.
 - D** Recalibrate / revise model.
- (note: a "C" action could turn into a "D" action depending on the results)

Summary of issues and concerns and actions to address each concern [option from above]:

1. **[B]** Marsh water quality loads:
 - a. **[A]** Inclusion in the enhanced grid
 - b. **[A]** Equal comparison between the TMDL and enhanced grids
 - c. **[C]** Is the CBODu too high?
 - d. **[C]** Mass exchange – flows and concentration
 - e. **[C]** Surface to bottom – CBODu vertical differences are a function of how marsh areas were loaded into the enhanced model
2. **[C]** Offshore boundary:
 - a. Salinity 34 to 36 ppt versus 32.5 to 35 ppt
 - i. Mass flux surface to bottom – may need to re-distribute at FR-26
 - b. Dissolved oxygen saturation 95 to 105% versus 90%
 - c. Temperature
 - d. Larry Neal gave info "World Ocean Atlas 2001" with data
 - e. CBOD decay rate – confirmed 0.5 multiplier on ocean cells
3. **[C]** Surface salinity:
 - a. Model appears to under predict surface salinity on the Front River. How does this impact the marsh succession modeling? The EFDC will output salinity for the neural net application, which feeds the marsh succession model. Right now, the neural net is using the USGS gages located between the Talmadge Bridge and I-95, located on Front and Back Rivers. These gages are considered to be mid-depth. The EFDC model is

predicting salinity well at the bottom and at mid-depth but under predicting salinity at the surface.

4. [A & B] Ebb flows and currents:
 - a. Under prediction of the ebb flows and currents on the Little Back and Back Rivers
5. [A] Water level at SR-17 on the Upper Savannah River
 - a. Potential of adding marsh storage areas upstream of I-95 Bridge
 - b. Show comparisons at the USGS Hardeeville gage (show plot)
6. [C & A] Global versus source-specific BOD decay rates
 - a. Sensitivity of calibration
 - b. Sensitivity on allocation scenarios (more for TMDL)
7. [A] Check all point sources and heat loads, especially Plant MacIntosh (MACTEC to verify)
8. [none] BOD loads from Corps' confined dredged sediment placement sites in SC and potential impacts on dissolved oxygen (future TMDL issue)
9. [A] Grid convergence test:
 - a. Show results of the TMDL grid with the same depth;
 - b. Show results on TMDL grid, enhanced grid, and convergence grid on the same plots;
 - c. Show comparisons on the Middle and Little Back Rivers;
 - d. Perform moving average of results to reduce tidal noise; and
 - e. Quantification of grid convergence test results.
10. [B & C] Delay in EFDC model salinity results at US FWS Dock comparisons of model versus data
11. [A] Clearer description of 1999 versus 2002 bathymetry and why the 2002 bathymetry data is representative of 1997 through 2003 conditions in the harbor
12. UA/SA Analysis: The group concluded that the inability to run the models over a 7-year duration was the result of synthetic data that was developed to fill in a data gap around December 2000. The group concluded that the inability of the model to run over the entire 7-year period of data does not reflect on the structure of the model or its performance, and should not be a consideration of the model's usefulness for its intended purposes of predicting impacts of the Savannah Harbor Expansion Project, developing a dissolved oxygen TMDL, or permitting point source discharges.

III. Model Application for Identifying Impacts to Water Quality.

The Interagency Water Quality Team then discussed application of the models for identifying impacts to water quality from the Savannah Harbor Expansion Project.

1. The impact evaluation runs should use a varying flow, rather than the uniform flow that was previously proposed by Savannah District.
2. Dissolved oxygen should be reported at increments of 0.1 mg/L, rather than the 0.5 mg/L that was proposed by Savannah District.

3. Model results in hourly outputs will be sufficient.

4. BOD loads should use the loads reported in 2004, rather than what was reported in 1999. The loads should be averaged over the entire summer. The loads should be run through both the RIVI model and WASP.

5. Potential impacts to the assimilative capacity of the harbor would need to be identified. This should be performed with the following model inputs:

- August 1999 tides, flows, temperature, and salinity
- Loads from upstream sources should include CBOD and ammonia

NOTE: A. flows would be varying, rather than uniform as previously proposed
 B. flows measured at Clio are considered representative of the critical conditions and the 7Q10 flow did occur during 1999

6. Natural condition runs would need to be performed. This should be performed with the following model inputs:

- Without point sources – no heat and BOD loads in harbor and upstream
- Without nonpoint sources – no stormwater loads, but marshes should be included
- Existing bathymetry (as expressed in calibrated model)

7. Further identification of potential impacts to temperature would be developed as part of the impact runs for Fisheries, which will include runs over January,

8. For water quality impact evaluation runs, the following scenarios would need to be evaluated:

- A. Natural condition without deepening
- B. Natural condition with deepening
- C. 2004 point source loads with deepening
- D. 2004 point source loads without deepening

9. The Corps expects to perform the following runs to evaluate potential effects of deepening the navigation channel:

- 1. existing = 42 feet
- 2. 44 feet
- 3. 45 feet
- 4. 46 feet
- 5. 47 feet
- 6. 48 feet

10. The team recognized that the various scenarios and model outputs that had been requested will require a great deal of effort and would produce a very large quantity of information. The team also recognized that some of that information may, ultimately, not be useful. To minimize the time spent developing, presenting, and interpreting model outputs, the team recommended they meet again as soon as the initial water quality model runs had been completed. The hope is that the initial outputs would show what type of information is truly needed to identify impacts from the proposed actions and

differentiate between the plans. This would allow other information to no longer be developed, presented or interpreted. The team recommended that the initial runs consist of (A) 2004 point source loadings, (B) natural conditions, and (C) maximum permitted loadings. Each of these three scenarios should be run for both the existing channel depth and the maximum deepening being considered.

Prepared by:
Steven Davie
Tetra Tech, Inc.

CESAM-PD-E

5 June 2006

Revised 30 June 2006

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 25 May meeting of the Water Quality Interagency
Coordination Team

1. Attendees:

GA DNR-EPD	Paul Lamarre
SC DHEC	Wade Cantrell
COE	Bill Bailey
	Joe Hoke
	Hugh Heine
EPA	Steve Whitlock
	Tim Wool
USGS	Paul Conrads (by phone)
Tetra Tech	Steve Davie
2. The meeting was held at EPA in Atlanta from roughly 1000 to 1500. The meeting was an information meeting only, not a decision meeting. The Corps was not requesting concurrence from the agencies on the level of impacts predicted for the project alternatives.
3. The following is a summary of the discussion and does not include all the information that was presented or all comments made during the discussion.
4. The Corps started by reviewing the process the Team had followed to arrive at this point:
 - EPA (through Tetra Tech) developed the initial version of the hydraulic and water quality models of the Savannah River estuary for TMDL purposes. Then the Corps (through Tetra Tech), under the review of the full Interagency Coordination Team, enhanced the models. The Corps will use these models for impact evaluation purposes on the Savannah Harbor Expansion Project
 - The agencies recently approved use of those two models for impact evaluation purposes on the SH Expansion Project.
 - The modelers had completed their impact runs using the input and output criteria specified by numerous resource agency reviewers. The modelers prepared a report documenting their findings and containing all the outputs that had been requested by the agency reviewers. The Corps sent that report to the Interagency Team for review.
 - The meeting was called to review the report and identify (A) what information is helpful to the water quality reviewers, (B) any information that was requested by

does not appear to be helpful, and (C) any information which is now believed to be needed to adequately assess potential project impacts to water quality but that is not in the present version of the report.

5. Steve Davie (Tetra Tech) gave a PowerPoint presentation with an overview of the impact analyses.

6. The group looked through the report and made several general observations:

- The increase in salinity at the surface at the Kings Island Turning Basin for a 6-foot deepening (90%) is predicted to 2-3 ppt.
- The increase in salinity at the bottom at the Kings Island Turning Basin for a 6-foot deepening (10%) is predicted to 5-6 ppt.
- The increase in salinity at the bottom at Drakies Cut for a 6-foot deepening (90%) is predicted to 6-7 ppt.
- The increase in salinity at the surface at the Sediment Basin for a 6-foot deepening (10%) is predicted to 2-3 ppt.
- Tables 3 & 4 show the water temperature to be cooler with a 6-foot deepening alternative.
- Figures 11 & 12, 13 & 14, and 15 & 16 show the areas of low dissolved oxygen extending further up in the water column with the deepening alternative. The location of the area of low dissolved oxygen also appears to move upstream somewhat. It doesn't change substantially. It was difficult to get more than just general information from these plots.
- Figures 19 & 20 show areas of lower dissolved oxygen in the shallows just upstream of the Tidegate.

7. The group looked through the report and made the following observations and recommendations:

- The SC D.O. standard includes an allowable impact component, which applies when numeric criteria are not attained under natural conditions. Modeling indicates this is the case over much of the system. The allowable impact ("delta D.O.") is specified as a daily average, which we take to mean the reduction in D.O. on any given calendar day. To compare to the SC D.O. standard, we will need to see the daily average delta D.O. for each transect plotted longitudinally from the inlet up Back River to the Tidegate and on up Back-Little Back Rivers. At each transect, surface, bottom, and water column average delta D.O. should be shown. Each plot should show the maximum, mean, and minimum daily average delta D.O. during the simulation period (in this case August 1999). We will start with the 6-foot deepening and coordinate the results with SC DHEC to evaluate this presentation format. Examination of these results could lead to more refined presentations to address compliance with this SC standard if (1) timing shifts confound the daily average comparison (in which case percentiles may be a better way), (2) showing the maximum delta D.O. for the entire simulation period overstates the extent of the impact on any single day, (3) it is determined it is

appropriate to group transects into segments to evaluate impacts, (4) etc. At this time, we will not develop this presentation format for the Front and Middle Rivers.

- The percentiles should be calculated first, then the differences between alternatives.
- Items #1 & 2 (Tables A.1.1 and A.1.2) are not useful to the States. They could be of use to EPA.
- Items #3 & 4 (temperature) are OK.
- Items #5 & 6 and 7 & 8. The volumes are OK. Use a cumulative frequency distribution function rather than the existing tables.
- Items #11 & 12, and 13 & 14, and 15 & 16 (D.O. Dynamics). The Without Project is OK. Show the change (delta) rather than the actual values for the deepening alternatives.
- Items #17 & 18 (Maximum velocity along perimeter). Value to the Corps only.
- Items #19 & 20, and 21 & 22 (Minimum D.O.). The Without Project is OK. Show the change (delta) rather than the actual values for the deepening alternatives. Why are there lower D.O. values along the bottom in Back River? Is this an influence of the Sediment Basin or discharges from the CDFs?
- Items #23 through 26. Value to EPA.
- Items #27 through 40 and 41 through 54 (dissolved oxygen). The Without Project is OK. Show the change (delta) rather than the actual values for the deepening alternatives. Possibly plot D.O. vs. cumulative frequency of exceedence (volume weighted).
- Items #55 through 68, and 69 through 82 (salinity). The Without Project is OK. Show the change (delta) rather than the actual values for the deepening alternatives.
- The report should describe how the input flow conditions are used for the various resources – varying flow for water quality, and constant flow for fisheries and wetlands.
- One member questioned whether the Middle and Back Rivers are stratified. This could affect how the model is applied for evaluating impacts to some resources. NOTE: After the meeting Paul Conrads (USGS) confirmed that after reviewing the field data and EFDC model results, except for one station (LBR-15), those areas are well mixed.
- One member wanted the group to remember that the model's performance (reliability in matching field data) is lower in the Middle and Back River areas. This should be considered when the model is used to evaluate the effects of "replumbing" to modify flows in that portion of the estuary.

8. The Corps stated that it is continuing to evaluate use of oxygen injection to mitigate for project-induced impacts to dissolved oxygen. Designing oxygen injection systems to mitigate for project impacts is the next step in that process. The SC DHEC position on this technique had been stated in a letter dated 12 August 2005. Separate from the SH Expansion Project, the Corps is resuming the Savannah Harbor Ecosystem Restoration Study, which is evaluating methods of restoring dissolved oxygen levels within the harbor. The Corps will carefully consider the siting of the oxygen injection

during the design process. Co-locating an oxygen injection system with an existing point source discharge is one measure that will be examined.

9. One member reported that report and CD did not contain the results of the 1850's bathymetry, and the maximum permitted loads. These had been requested by the Team. The Corps will look into this and make sure these runs are included when a CD with the revised reports are distributed.

10. One member requested the raw EFDC and WASP BMD files for the existing and 6-foot deepening scenarios for August 1999. The Corps will ensure they are made available to the Team.

11. After the meeting, one member requested that the final impact analyses include BOD loadings from the SC CDFs. These loadings should include (A) any increases in flow expected from the CDFs during construction of the harbor deepening, and (B) the potential contribution of ammonia to the total oxygen demand. If an increase would occur only during construction, then it would be appropriate to consider only potential increases from regular maintenance of the deeper channel.

12. After the meeting, one member questioned why the model predicts dissolved oxygen levels in Little Back River decreasing at the surface by 0.3-0.4 mg/l, while increasing at along the bottom by 0.3-0.45 mg/l. They also questioned why point source loadings appear to affect dissolved oxygen levels differently from surface to bottom.

13. The Corps will provide revised Impact Reports to the agencies when those revisions and corrections are complete. The updated report will be provided on CD only. Agency Team members are free to send the Corps any comments they may have after further review of the present Impact Report or review of the revised report.

14. The Corps will continue its work on evaluating potential mitigation measures. When it has developed combinations of mitigation measures that it believes would be effective, the Corps will hold another meeting of the Interagency Coordination Team to share those results. That meeting would be prior to the Corps' completion of a Draft EIS or a request for agency concurrence on the acceptability of the mitigation plans or the project alternatives.

// ss //

William Bailey
Environment and Resources Branch

CESAM-PD-E

Revised

23 Jan 2007

29 Jan 2007

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 19 Jan meeting of the Interagency Water Quality
Coordination Team

1. Attendees:

GA DNR-EPD SC DHEC COE EPA USGS Tetra Tech NOAA-Fisheries USFWS Georgia Ports Authority	Paul Lamarre Wade Cantrell Amy Bennett Bill Bailey Jim Greenfield Ted Bisterfeld Annie Godfrey Paul Conrads Steve Davie Yuri Plis Kay Davy Ed EuDaly Hope Mooror	(by phone)
---	--	------------
2. The meeting was held at EPA in Atlanta from roughly 0900 to 1430. The meeting was primarily an information meeting, but recommendations were made on some items. The team reviewed and discussed three recent reports produced for the Corps by Tetra Tech (described below). The Corps did not request concurrence from the agencies on the acceptability of the dissolved oxygen mitigation designs developed for the SH Expansion Project.
3. The following is a summary of the discussions and does not include all the information that was presented or all comments made during the discussion.
4. The team started by reviewing the December 2006 report titled "Determination of Dissolved Oxygen Impacts for the Savannah Harbor Ecosystem Project". This report was developed for the SH Ecosystem Restoration Study, but provides useful information for the team's discussions on the SH Expansion Project. The following items were discussed:
 - The report was to identify the causes of the D.O. problem and evaluate the model's predictions of the manner in which injected D.O. would mix in the harbor.
 - All runs include the upriver point source discharges.
 - The report shows D.O. values that are both vertically and laterally averaged.

- Tetra Tech summarized the findings by stating that the harbor discharges appear to have a 0.3-0.4 ppm impact on D.O., while the existing harbor appears to have a 1-2 ppm impact.
- Tetra Tech observed that salinity did not progress further upriver than Fort Jackson in the pre-harbor (1854) runs.
- When the analysis was conducted of the pre-harbor condition, only the bathymetry was changed. The SOD and decay rates were not altered.
- EPA stated they believed that an analysis of “natural conditions” should include a single SOD rate throughout the harbor, pre-dam river flows, and no upstream or downstream point source discharges.

5. The team then reviewed the November 2006 report titled “Design of Dissolved Oxygen Improvement Systems in Savannah Harbor; **Task II** Report”. The following items were discussed:

- One team member stated that the report purpose is not clear. Although the report contains information about compliance with state standards, the purpose for this work was to design D.O. injection systems that would mitigate for incremental effects to D.O. from further deepening of the harbor. Section 1 could be clarified.
- SC DHEC expressed concern about the 2nd paragraph in Section 1. They believe the statement about the models being acceptable to identify dissolved oxygen impacts “throughout Savannah Harbor” overstates their approval. Their letter had expressed concerns about the performance of the models in the Middle, Back, and Little Back Rivers. They concurred in the models’ use for comparative purposes, but had concerns about its use for prediction of absolute values of D.O..
- We discussed the design approach and had the following comments:
 - The critical cell is the cell with the lowest calculated D.O. in that segment.
 - The segment approach is more detailed than the TMDL analysis.
 - The siting of the D.O. injection systems was based primarily on modeling and did not include great consideration of the landside conditions (wetlands, access, power availability, etc).
 - The only difference in the models between the Calibration Report and now is the use of the latest EPA-approved versions of EFDC and WASP. These revisions slightly changed dispersion in the riverine reaches.
 - Injection of D.O. is modeled to occur at the channel toe, at the same depth as its withdrawal.
 - Water is modeled to be withdrawn roughly 20 feet from the injection. A large horizontal separation is not needed.
 - Concerns were raised by GA DNR and SC DHEC about potential toxicity of the oxygenated water. The team stated that this concern could be addressed by a dye test or near-field monitoring if a demonstration project occurs.
 - NOAA-Fisheries stated that the systems should be designed with an intake velocity of ≤ 0.5 feet-per-second across the screens to minimize potential impacts to fish.
 - The systems are not expected to have any effect on water temperature.

- The modeling shows that to address the D.O. impacts of a further harbor deepening, higher river flows require more oxygen to be added than do low flows.
- NOAA-Fisheries requested the system operation include the ability and a procedure to cease operation if a fish entrainment event occurs.
- We then discussed siting the D.O. injection systems and had the following comments:
 - The USFWS stated that the McCoys Cut site is not feasible. It has very little high ground and no road access or power.
 - We could possibly combine the D.O. to be added at Mill Stone Landing and McCoys Cut into a single location. Locating the system along I-95 was identified as one possibility.
 - USFWS stated that the salinity mitigation plans are likely to modify D.O. impacts. Major salinity mitigation features that may affect D.O. levels and D.O. mitigation features include: reduction in depth of the Sediment Basin, McCoys Cut diversion structure, and closing or opening various channels.
- The team recommended we run the models at high river flows (75 %-tile flows) to ensure the design is sized to handle the entire spectrum of river flows.
- We discussed extent of change or improvement. The team decided that we did not need to improve D.O. at levels < 1 % (for zones/segments with D.O. standards violations) or < 0.01 ppm (for mitigation purposes).

6. The team then reviewed the November 2006 report titled “Design of Dissolved Oxygen Improvement Systems in Savannah Harbor; **Task I** Report”. This report was developed for the SH Ecosystem Study. The Corps is separately seeking resource agency views on completing that study, so it was seeking the views of the technical staff on the most recent study product. The group looked through the report and made the following observations and recommendations:

- Again, the report purpose in Section 1 could be clarified.
- Again, the wording of the 2nd paragraph in Section 1 should be revised to reflect SC DHEC’s concerns about the models’ performance in the Middle, Back, and Little Back Rivers.
- The report evaluated both the SC and GA standards in those rivers that include the state border. The design used the most restrictive of the two standards – required the most oxygen to be added – when that occurred.
- The SC standard was generally found to be more restrictive. The analysis used the standard of a minimum of 4.0 ppm.
- The proposed D.O. standard (Draft TMDL) was applied in a separate analysis throughout the entire model grid.
- The team discussed a “natural conditions” analysis, which is a typical component of a permit review. The team concluded that the analysis should include the following components for this system:
 - No point sources – upriver or harbor
 - Historic river depths (1854 is available for the harbor)
 - Pre-dam river flows (drought flows were lower before the dams)

- Single SOD rate throughout the estuary
- Without the type of “natural conditions” run described above, the designs are likely to be a worst-case analysis for D.O. needs in the harbor. A “natural conditions” analysis is likely to show that adding oxygen to some areas would result in those locations being above “natural conditions” and thus exceed what would be considered restoration.
- We discussed specific sites.
 - The most upriver site (Savannah River) experiences D.O. at the 1 %-tile of 2.34 ppm during a drought and 4.56 during average flows. A D.O. improvement system would not need to operate during all flow conditions. This site is one where the proposed improvements may exceed the natural conditions.
 - Again, the McCoys Cut site is not feasible.
 - The South Channel site was then discussed. Tetra Tech stated that location receives a D.O. impact of 0 to 0.15 ppm from harbor point source loads but no effect from a further deepening. This is another site where the proposed improvements may exceed the natural conditions.
- With the present designs, Table A-1 shows that the SC standard is not met in Middle River 2 % of the time (reduced from 6 to 2 %). We distributed revised tables that show the results for all the areas where the SC standard applies (Attachment 1). The revisions show different model performance in Back and Little Back Rivers. The new results show the present design does not meet SC standards up to 55 % of the time (BR2, Table B-1). Although an improvement from the present condition, the designs need to be revised to better meet the standard in the BR/LBR/MR areas. We distributed the results of analyses Tetra Tech conducted after completing the report which show the D.O. regime with more oxygen being added at the Tidegate (Attachment 2). Those designs greatly reduce the number of time the SC standard is not met in those areas.
- The team agreed that this report provides valuable information for the states and EPA as they develop new D.O. standards for the harbor.
- It was mentioned that additional work could be conducted under the SH Ecosystem Restoration Study – such as natural conditions runs – which would further benefit, the resource agencies in the development of a D.O. standard.

7. The Corps asked how we should model one of the mitigation options we are evaluating -- filling the Sediment Basin (or letting it fill naturally). The question is whether the major alteration of the site's present depth (from 42 to 12 feet) and cessation of its fine sediment accumulation would modify its high SOD rate. The team concurred that a lower SOD rate should be applied to the Sediment Basin area when modeling that mitigation option. The group felt that we should use the same SOD rate as the model now has in the Middle River, Back River (upstream of Tidegate) and Little Back River areas.

8. The team requested the Corps distribute the preliminary water quality report so they could see if all the previously-requested outputs are as useful as they had envisioned. I sent the report out on 23 January.

// ss //

William Bailey
Environment and Resources Branch

ATTACHMENT 1

Revisions to Tables A-1, B-1, etc to include entire SC border (and conformance with SC D.O. standard)

Table A-1 (Appendix A.1)

**PERCENTAGE OF WATER VOLUME WITH VIOLATION OF STANDARDS FOR
DISSOLVED OXYGEN IN WATER COLUMN OF SPECIFIED ZONES**

Simulation Period: Year 1987 AUGUST 1 -AUGUST 31
Scenario: 97-IN7

Zone	D.O. STANDARDS														
	1-Day Average			7-Day Average			30-Day Average			MINIMUM			MINIMUM		
	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)
FR1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
FR2	0	0	0	0	0	0	0	0	0	0	0	0	7	1	-6
FR3	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR4	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR5	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR6	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR7	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR8	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR9	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR10	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
MR1	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
MR2	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
MR3	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
MR4	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
MR5	0	0	0	0	0	0	0	0	0	3	0	-3	6	2	-4
MR6	0	0	0	0	0	0	0	0	0	1	0	-1	5	1	-4
LB1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
LB2	0	0	0	0	0	0	0	0	0	0	0	0	9	0	-9
LB3	0	0	0	0	0	0	0	0	0	0	0	0	22	1	-21
BR1	0	0	0	0	0	0	0	0	0	1	0	-1	47	10	-37
BR2	0	0	0	0	0	0	1	0	-1	1	0	-1	66	9	-57
BR3	0	0	0	0	0	0	1	0	-1	1	0	-1	61	17	-44
SCH1	0	0	0	2	0	-2	0	0	0	4	0	-4	NA	NA	NA
SCH2	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
SR	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Table B-1 (Appendix B.1)

**PERCENTAGE OF WATER VOLUME WITH VIOLATION OF STANDARDS FOR
DISSOLVED OXYGEN IN WATER COLUMN OF SPECIFIED ZONES**

Simulation Period: Year 1997 AUGUST 1 - AUGUST 31

Scenario: 97-4-3

Zone	D.O. STANDARDS														
	1-Day Average			7-Day Average			30-Day Average			CAMBRIUM D.O.			SC-MINIMUM D.O.		
	Baseline(B)	Project(P)	Other(O)	Baseline(B)	Project(P)	Other(O)	Baseline(B)	Project(P)	Other(O)	Baseline(B)	Project(P)	Other(O)	Baseline(B)	Project(P)	Other(O)
FR1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
FR2	0	0	0	0	0	0	0	0	0	0	0	0	7	6	-1
FR3	0	0	0	0	0	0	0	0	0	0	0	0	N/A	N/A	N/A
FR4	0	0	0	0	0	0	0	0	0	0	0	0	N/A	N/A	N/A
FR5	0	0	0	0	0	0	0	0	0	0	0	0	N/A	N/A	N/A
FR6	0	0	0	0	0	0	0	0	0	0	0	0	N/A	N/A	N/A
FR7	0	0	0	0	0	0	0	0	0	0	0	0	N/A	N/A	N/A
FR8	0	0	0	0	0	0	0	0	0	0	0	0	N/A	N/A	N/A
FR9	0	0	0	0	0	0	0	0	0	0	0	0	N/A	N/A	N/A
FR10	0	0	0	0	0	0	0	0	0	0	0	0	N/A	N/A	N/A
FR11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
MR1	0	0	0	0	0	0	0	0	0	0	0	0	N/A	N/A	N/A
MR2	0	0	0	0	0	0	0	0	0	0	0	0	N/A	N/A	N/A
MR3	0	0	0	0	0	0	0	0	0	0	0	0	N/A	N/A	N/A
MR4	0	0	0	0	0	0	0	0	0	0	0	0	N/A	N/A	N/A
MR5	0	0	0	0	0	0	0	0	0	3	0	-3	6	3	-3
MR6	0	0	0	0	0	0	0	0	0	1	0	-1	5	3	-2
LBK1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
LBK2	0	0	0	0	0	0	0	0	0	0	0	0	9	0	-9
LBK3	0	0	0	0	0	0	0	0	0	0	0	0	22	3	-19
BR1	0	0	0	0	0	0	0	0	0	1	0	-1	47	36	-11
BR2	0	0	0	0	0	0	1	0	-1	1	1	0	66	55	-11
BR3	0	0	0	0	0	0	1	0	-1	1	0	-1	61	44	-17
SCH1	0	0	0	2	0	-2	0	0	0	4	0	-4	N/A	N/A	N/A
SCH2	0	0	0	0	0	0	0	0	0	0	0	0	N/A	N/A	N/A
SR	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Table C-1 (Appendix C.1)

**PERCENTAGE OF WATER VOLUME WITH VIOLATION OF STANDARDS FOR
DISSOLVED OXYGEN IN WATER COLUMN OF SPECIFIED ZONES**

Simulation Period: Year 1999 AUGUST 1 -AUGUST 31

Scenario: 99-M10

Zones	D.O. STANDARDS														
	1-Day Average			7-Day Average			30-Day Average			MINIMUM D.O.			SCHEMUM D.O.		
	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)
FR1	0	0	0	0	0	0	0	0	0	0	0	0	19	0	-19
FR2	0	0	0	0	0	0	0	0	0	1	0	-1	65	1	-64
FR3	0	0	0	5	0	-5	2	0	-2	9	0	-9	NA	NA	NA
FR4	0	0	0	13	0	-13	2	0	-2	15	0	-15	NA	NA	NA
FR5	0	0	0	10	0	-10	1	0	-1	13	0	-13	NA	NA	NA
FR6	0	0	0	4	0	-4	1	0	-1	7	0	-7	NA	NA	NA
FR7	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR8	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR9	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR10	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR11	0	0	0	1	0	-1	0	0	0	3	0	-3	10	0	-10
MR1	0	0	0	0	0	0	1	0	-1	1	0	-1	NA	NA	NA
MR2	0	0	0	1	0	-1	1	0	-1	3	0	-3	NA	NA	NA
MR3	0	0	0	8	0	-8	1	0	-1	8	0	-8	NA	NA	NA
MR4	0	0	0	2	0	-2	0	0	0	4	0	-4	NA	NA	NA
MR5	0	0	0	2	0	-2	1	0	-1	8	0	-8	14	1	-13
MR6	0	0	0	0	0	0	0	0	0	5	0	-5	12	0	-12
LBR1	0	0	0	3	0	-3	0	0	0	3	0	-3	30	0	-30
LBR2	2	0	-2	13	0	-13	1	0	-1	16	0	-16	45	0	-45
LBR3	9	0	-9	25	0	-25	1	0	-1	29	0	-29	58	5	-53
BR1	0	0	0	26	0	-26	3	0	-3	33	0	-33	94	8	-86
BR2	4	0	-4	48	0	-48	3	0	-3	54	0	-54	95	3	-92
BR3	7	0	-7	45	0	-45	3	0	-3	57	0	-57	86	21	-65
SCH1	3	0	-3	6	0	-6	1	0	-1	9	0	-9	NA	NA	NA
SCH2	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
SR	0	0	0	3	0	-3	0	0	0	4	0	-4	11	0	-11

Table D-1 (Appendix D.1)

**PERCENTAGE OF WATER VOLUME WITH VIOLATION OF STANDARDS FOR
DISSOLVED OXYGEN IN WATER COLUMN OF SPECIFIED ZONES**

Simulation Period: Year 1999 AUGUST 1 -AUGUST 31
Scenario: 99-20

Zones	D.O. STANDARDS														
	1-Day Average			7-Day Average			30-Day Average			GRANULUM D.O.			SCUMMUM D.O.		
	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)
FR1	0	0	0	0	0	0	0	0	0	0	0	0	19	9	-10
FR2	0	0	0	0	0	0	0	0	0	1	0	-1	65	39	-26
FR3	0	0	0	5	0	-5	2	0	-2	9	0	-9	NA	NA	NA
FR4	0	0	0	13	0	-13	2	0	-2	15	0	-15	NA	NA	NA
FR5	0	0	0	10	0	-10	1	0	-1	13	0	-13	NA	NA	NA
FR6	0	0	0	4	0	-4	1	0	-1	7	0	-7	NA	NA	NA
FR7	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR8	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR9	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR10	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR11	0	0	0	1	0	-1	0	0	0	3	0	-3	10	7	-3
MR1	0	0	0	0	0	0	1	0	-1	1	0	-1	NA	NA	NA
MR2	0	0	0	1	0	-1	1	0	-1	3	0	-3	NA	NA	NA
MR3	0	0	0	8	0	-8	1	0	-1	8	0	-8	NA	NA	NA
MR4	0	0	0	2	0	-2	0	0	0	4	0	-4	NA	NA	NA
MR5	0	0	0	2	0	-2	1	0	-1	8	0	-8	14	2	-12
MR6	0	0	0	0	0	0	0	0	0	5	0	-5	12	2	-10
LBR1	0	0	0	3	0	-3	0	0	0	3	0	-3	30	0	-30
LBR2	2	0	-2	13	0	-13	1	0	-1	16	0	-16	45	0	-45
LBR3	9	0	-9	25	0	-25	1	0	-1	29	0	-29	58	7	-51
BR1	0	0	0	26	0	-26	3	0	-3	33	1	-32	94	45	-49
BR2	4	0	-4	48	0	-48	3	0	-3	54	0	-54	95	37	-58
BR3	7	0	-7	45	0	-45	3	0	-3	57	0	-57	86	47	-39
SC11	3	0	-3	6	0	-6	1	0	-1	9	0	-9	NA	NA	NA
SC12	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
SR	0	0	0	3	0	-3	0	0	0	4	0	-4	11	7	-4

ATTACHMENT 2

Information showing compliance with D.O. standards with additional volumes of oxygen being injected at the Tidegate

Appendix A-1
Table A-1

**PERCENTAGE OF WATER VOLUME WITH VIOLATION OF STANDARDS FOR
DISSOLVED OXYGEN IN WATER COLUMN OF SPECIFIED ZONES**

Simulation Period: Year 1997 AUGUST 1 -AUGUST 31
Scenario: 97-mm/

Zone	D.O. STANDARDS														
	1-Day Average			7-Day Average			30-Day Average			MINIMUM D.O.			SCMINIMUM D.O.		
	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)
FR1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
FR2	0	0	0	0	0	0	0	0	0	0	0	0	7	0	-7
FR3	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR4	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR5	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR6	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR7	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR8	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR9	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR10	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
MR1	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
MR2	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
MR3	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
MR4	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
MR5	0	0	0	0	0	0	0	0	0	3	0	-3	6	2	-4
MR6	0	0	0	0	0	0	0	0	0	1	0	-1	5	1	-4
LBR1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
LBR2	0	0	0	0	0	0	0	0	0	0	0	0	9	0	-9
LBR3	0	0	0	0	0	0	0	0	0	0	0	0	22	0	-22
BR1	0	0	0	0	0	0	0	0	0	1	0	-1	47	4	-43
BR2	0	0	0	0	0	0	1	0	-1	1	0	-1	66	0	-66
BR3	0	0	0	0	0	0	1	0	-1	1	0	-1	61	3	-58
SCH1	0	0	0	2	0	-2	0	0	0	4	0	-4	NA	NA	NA
SCH2	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
SR	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Source (I=31, J=63 - Tide Gate) = 8,000 kg/day

Appendix A-1
Table A-1

**PERCENTAGE OF WATER VOLUME WITH VIOLATION OF STANDARDS FOR
DISSOLVED OXYGEN IN WATER COLUMN OF SPECIFIED ZONES**

Simulation Period: Year 1997 AUGUST 1 -AUGUST 31

Scenario: 97-mm2

Zones	D.O. STANDARDS														
	1-Day Average			7-Day Average			30-Day Average			MINIMUM D.O.			SCMINIMUM D.O.		
	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)	Baseline(B)	Project(P)	Delta(P-B)
FR1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
FR2	0	0	0	0	0	0	0	0	0	0	0	0	7	0	-7
FR3	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR4	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR5	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR6	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR7	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR8	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR9	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR10	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
MR1	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
MR2	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
MR3	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
MR4	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
MR5	0	0	0	0	0	0	0	0	0	3	0	-3	6	2	-4
MR6	0	0	0	0	0	0	0	0	0	1	0	-1	5	1	-4
LBR1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
LBR2	0	0	0	0	0	0	0	0	0	0	0	0	9	0	-9
LBR3	0	0	0	0	0	0	0	0	0	0	0	0	22	0	-22
BR1	0	0	0	0	0	0	0	0	0	1	0	-1	47	2	-45
BR2	0	0	0	0	0	0	1	0	-1	1	0	-1	66	0	-66
BR3	0	0	0	0	0	0	1	0	-1	1	0	-1	61	0	-61
SC11	0	0	0	2	0	-2	0	0	0	4	0	-4	NA	NA	NA
SC12	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
SR	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Source (I=31, J=63 - Tide Gate) = 12,000 kg/day

Appendix C-1
Table C-1

**PERCENTAGE OF WATER VOLUME WITH VIOLATION OF STANDARDS FOR
DISSOLVED OXYGEN IN WATER COLUMN OF SPECIFIED ZONES**

Simulation Period: Year 1999 AUGUST 1 -AUGUST 31

Scenario: 99-Hrml

Zones	DO STANDARDS														
	1-Day Average			7-Day Average			30-Day Average			GA MINIMUM			SC MINIMUM		
	Baseline(B)	Project(P)	Date-PS	Baseline(B)	Project(P)	Date-PS	Baseline(B)	Project(P)	Date-PS	Baseline(B)	Project(P)	Date-PS	Baseline(B)	Project(P)	Date-PS
FR1	0	0	0	0	0	0	0	0	0	0	0	0	19	0	-19
FR2	0	0	0	0	0	0	0	0	0	1	0	-1	65	0	-65
FR3	0	0	0	5	0	-5	2	0	-2	9	0	-9	NA	NA	NA
FR4	0	0	0	13	0	-13	2	0	-2	15	0	-15	NA	NA	NA
FR5	0	0	0	10	0	-10	1	0	-1	13	0	-13	NA	NA	NA
FR6	0	0	0	4	0	-4	1	0	-1	7	0	-7	NA	NA	NA
FR7	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR8	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR9	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR10	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR11	0	0	0	1	0	-1	0	0	0	3	0	-3	10	0	-10
MR1	0	0	0	0	0	0	1	0	-1	1	0	-1	NA	NA	NA
MR2	0	0	0	1	0	-1	1	0	-1	3	0	-3	NA	NA	NA
MR3	0	0	0	8	0	-8	1	0	-1	8	0	-8	NA	NA	NA
MR4	0	0	0	2	0	-2	0	0	0	4	0	-4	NA	NA	NA
MR5	0	0	0	2	0	-2	1	0	-1	8	0	-8	14	1	-13
MR6	0	0	0	0	0	0	0	0	0	5	0	-5	12	0	-12
LER1	0	0	0	3	0	-3	0	0	0	3	0	-3	30	0	-30
LER2	2	0	-2	13	0	-13	1	0	-1	16	0	-16	45	0	-45
LER3	9	0	-9	25	0	-25	1	0	-1	29	0	-29	58	3	-55
BR1	0	0	0	26	0	-26	3	0	-3	33	0	-33	94	1	-93
BR2	4	0	-4	48	0	-48	3	0	-3	54	0	-54	95	0	-95
BR3	7	0	-7	45	0	-45	3	0	-3	57	0	-57	85	6	-80
SC11	3	0	-3	6	0	-6	1	0	-1	9	0	-9	NA	NA	NA
SC12	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
SR	0	0	0	3	0	-3	0	0	0	4	0	-4	11	0	-11

Source (I=31, J=63 - Tide Gate) = 20,000 kg/day

Appendix C-1
Table C-1

**PERCENTAGE OF WATER VOLUME WITH VIOLATION OF STANDARDS FOR
DISSOLVED OXYGEN IN WATER COLUMN OF SPECIFIED ZONES**

Simulation Period: Year 1999 AUGUST 1 - AUGUST 31

Scenario: 694mm₂

Zones	D.O. STANDARDS														
	1-Day Average			7-Day Average			30-Day Average			MINIMUM D.O.			SC MINIMUM D.O.		
	Baseline(B)	Point(P)	Date(P)	Baseline(B)	Point(P)	Date(P)	Baseline(B)	Point(P)	Date(P)	Baseline(B)	Point(P)	Date(P)	Baseline(B)	Point(P)	Date(P)
FR1	0	0	0	0	0	0	0	0	0	0	0	0	19	0	-19
FR2	0	0	0	0	0	0	0	0	0	1	0	-1	65	0	-65
FR3	0	0	0	5	0	-5	2	0	-2	9	0	-9	NA	NA	NA
FR4	0	0	0	13	0	-13	2	0	-2	15	0	-15	NA	NA	NA
FR5	0	0	0	10	0	-10	1	0	-1	13	0	-13	NA	NA	NA
FR6	0	0	0	4	0	-4	1	0	-1	7	0	-7	NA	NA	NA
FR7	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR8	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR9	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR10	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
FR11	0	0	0	1	0	-1	0	0	0	3	0	-3	10	0	-10
MR1	0	0	0	0	0	0	1	0	-1	1	0	-1	NA	NA	NA
MR2	0	0	0	1	0	-1	1	0	-1	3	0	-3	NA	NA	NA
MR3	0	0	0	8	0	-8	1	0	-1	8	0	-8	NA	NA	NA
MR4	0	0	0	2	0	-2	0	0	0	4	0	-4	NA	NA	NA
MR5	0	0	0	2	0	-2	1	0	-1	8	0	-8	14	1	-13
MR6	0	0	0	0	0	0	0	0	0	5	0	-5	12	0	-12
LBR1	0	0	0	3	0	-3	0	0	0	3	0	-3	30	0	-30
LBR2	2	0	-2	13	0	-13	1	0	-1	16	0	-16	45	0	-45
LBR3	9	0	-9	25	0	-25	1	0	-1	29	0	-29	58	2	-58
BR1	0	0	0	26	0	-26	3	0	-3	33	0	-33	94	0	-94
BR2	4	0	-4	48	0	-48	3	0	-3	54	0	-54	95	0	-95
BR3	7	0	-7	45	0	-45	3	0	-3	57	0	-57	86	3	-83
SC1	3	0	-3	6	0	-6	1	0	-1	9	0	-9	NA	NA	NA
SC12	0	0	0	0	0	0	0	0	0	0	0	0	NA	NA	NA
SR	0	0	0	3	0	-3	0	0	0	4	0	-4	11	0	-11

Source (I=31, J=63 – Tide Gate) = 25,000 kg/day

CESAM-PD-E

7 Jun 2008

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 27 May meeting of the Interagency Water Quality
Coordination Team

1. Attendees:

GA DNR-EPD SC DHEC SC DNR COE EPA USFWS USGS Georgia Ports Authority MACTEC Tetra Tech	Liz Booth Wade Cantrell Larry Turner Chris Beckham Priscilla Wendt (by phone) Bill Bailey Jim Greenfield (by phone) Ted Bisterfeld Heinz Mueller Ed EuDaly (by phone) Paul Conrads Hope Moorner Margaret Tanner Larry Neal Steve Davie
---	--

2. The meeting was held at the Corps' South Atlantic Division offices in Atlanta from roughly 1000 to 1400. The meeting was primarily an information meeting, but some recommendations were made. The primary issue was a review of the January 2008 report produced for GPA by MACTEC titled "Savannah Harbor ReOxygenation Demonstration Project Report". Paul Conrads had reviewed the report for the USFWS and had expressed concerns about its technical adequacy.

3. The following is a summary of the discussions and does not include all the information that was presented or all comments made during the discussion.

4. MACTEC reviewed the technical details of the demonstration project that GPA performed last summer of oxygen injection in Savannah Harbor. MACTEC had conducted the project and prepared the monitoring report. MACTEC also described the observations it made during the project about the technology and the effects it observed in the river. They went on to explain the findings that they had included in the report and their overall assessment of the demonstration project.

MACTEC agreed that their analysis of the monitoring data could have been more detailed. They agreed to examine the data further, with particular emphasis on the issues that Paul Conrads had raised. They would issue a supplemental report with their additional findings.

GPA also agreed to include use of the approved EFDC and WASP hydrodynamic and water quality models in this more detailed analysis to attempt to identify (1) how far the effects of the oxygen addition should have been observable, (2) what the D.O. levels would have been in the harbor had the oxygen not been added, and (3) whether the amount of oxygen that was added produced the level of improvement that the model would predict. The last of those three questions would address uncertainty in whether the oxygen addition produces the beneficial effects that the modeling predicts.

5. The Corps attempted to clarify the major issues associated with this report. It identified two major questions:

(1) Did the Demonstration Project alter the dissolved oxygen in the river? If the Demonstration Project found that the dissolved oxygen in the harbor was not altered and improved by the addition of oxygen, then the Corps would need to identify another technique to mitigate for expected adverse impacts to D.O. from a further harbor deepening.

(2) Did the Demonstration Project indicate that the oxygen transfer efficiency of the Speece cones should be revised in the final design to ensure the oxygen addition produces the beneficial effects that the modeling predicts? If the oxygen transfer efficiency observed during the Demonstration Project was substantially less than what was assumed by the designers, then additional oxygen would need to be added to produce the desired amount of beneficial effects.

No agency represented would disagree that the Demonstration Project beneficially altered the dissolved oxygen in the river. There was considerable uncertainty among the meeting attendees on the extent of that improvement. The agencies continue to believe that oxygen addition may be an effective method of mitigating for adverse impacts on D.O. from further deepening of the harbor. In light of that continued support for the mitigation technique, the Corps will continue to the addition of oxygen as mitigation as it writes the Draft EIS for the project.

The Corps will review the supplemental report issued by MACTEC and GPA to determine whether it should revise the oxygen transfer efficiency used in the final designs of the D.O. improvement systems.

// DRAFT //

William Bailey
Physical Scientist

From: Hoke, Joseph T SAS
To: "Ed Eudaly"; "Jim Greenfield"; "Paul Conrads"; "sinto-Brownell, Prescott"; "cantreym@dhec.sc.gov";
 "Paul_Lamarre@dnr.state.ga.us"; "Roy_Burke@mail.dnr.state.ga.us"; "TURNERLE@dhec.sc.gov";
 "METANNER@marterc.com"; "ineal@marterc.com"
Cc: Plachy, Douglas H SAS; Bailey, William G SAS; "keegan@lg.com"
Subject: Savannah Harbor - EFDC training, EFDC model contract review meeting
Date: Tuesday, October 12, 2004 1:57:48 PM

The U.S. Army Corps of Engineers, Savannah District, will be hosting a workshop on the Savannah Harbor Expansion EFDC model, presented by instructors from Tetra Tech, Inc. The workshop will take place on October 26, 27, and 28 in the Savannah District office. On the 26th, beginning at 1 pm, there will be a lecture/chalkboard session on the background and basics of the model in the 3rd floor Planning Division conference room. On Wednesday, 27 October, it will be an all-day hands-on computer workshop session in the 2nd floor Information Management Training Room. Finally, on the 28th, we will move back to the Planning Conference Room for a wrap-up session that should end by 10 am.

Following the workshop will be a meeting of the SHEP EFDC model review team at 10:30 am, which will feature a briefing by Tetra Tech on the status of the EFDC modeling effort, preliminary results, and discussion.

Note that although the EFDC model being used for SHEP is similar to the TMDL model, the focus of this training will be on the model application to the Savannah Harbor Expansion, thus no TMDL issues will be addressed as part of this workshop.

Margaret, feel free to pass this invitation along to other representatives of local agencies.

The review team is welcome to attend just the meeting, or any or all of the training session. Please let me know if you are planning to attend, and which parts.

Joe Hoke
 Hydraulic Engineer Team Leader
 U.S. Army Corps of Engineers, Savannah District
 912-652-5516

From: Hoke, Joseph T SAS
To: Douglas H SAS Plachy (F-mail); Ed Eudaly (F-mail) (F-mail); Jim Greenfield (F-mail) (F-mail); Larry Keegan (F-mail) (F-mail); "Larry Turner" (F-mail); Paul Conrads (F-mail) (F-mail); "Paul Lamarre" (F-mail); Prescott Brownell (F-mail) (F-mail); "Roy Burke" (F-mail); "Wade Cantrell" (F-mail); William G SAS Bailey (F-mail); Steven Davie (F-mail); "Chuck Watson"
Cc:
Subject: Savannah Harbor EFDC Model Grid Resolution Technical Memo
Date: Monday, December 13, 2004 6:01:54 PM
Attachments: Tr Memo on Model Grid (12-10-04).doc

To: Savannah Harbor Model Review Team Members

Please review the attached technical memo from Steven Davie on the enhanced grid for the EFDC model, and provide comments back to me by Monday, 20 December. If you have no comments, please respond with that message so I know you have seen the memo. Please let me know if you think I have overlooked anyone on the distribution list.

Also, we are due in early January to review the EFDC and WASP calibration. I thought about piggybacking on the TMDL meeting, but I know that Paul Conrads is not available that week. Please e-mail me the dates that you are NOT available and I will try to put together a matrix of potential meeting dates. Also let me know what meeting site(s) you prefer; or another option under consideration is a virtual meeting with slides presented via internet connection and discussion via conference call. Opinions welcome.

Joe Hoke
 Hydraulic Engineer Team Leader
 U.S. Army Corps of Engineers, Savannah District
 912-652-5516

-----Original Message-----

From: Steven Davie [mailto:steven.davie@tetratech-ffx.com]
 Sent: Friday, December 10, 2004 5:55 PM
 To: Joe Hoke
 Cc: Yuri Plis; Will Anderson; Chuck (Charles) Watson; William (Bill) Bailey; Doug Plachy
 Subject: Savannah Model Grid Resolution Technical Memo

Joe,

Please find attached the technical memo that describes the enhanced model grid. We placed several graphics in the file so that specific areas can be reviewed. We are currently working on getting the appropriate bathymetry into the grid and should be running the model sometime next week. We will keep you posted on the model run times, the vertical resolution, and the marsh approach. If you would like some other graphics on the grid, we would be glad to provide them or give you the ArcView shape file of the grid.

Thanks and have a good weekend,
 Steven

 Steven R. Davie
 Tetra Tech, Inc.
 Director - Atlanta
 770-850-0949 ext. 102
www.ttwater.com

**TETRA TECH, INC.**

2110 Powers Ferry Road, Suite 202

Atlanta, Georgia 30339

Phone: (770) 850-0949

Fax: (770) 850-0950

TECHNICAL MEMORANDUM NO. 1

Date: December 10, 2004

To: Joe Hoke, USACE Savannah District

From: Steven Davie

Cc: Doug Plachy and Bill Bailey, USACE Savannah District

Subject: Savannah Harbor EFDC and WASP Model Grid
Tt Project No. J391-02

Tetra Tech, Inc. (Tetra Tech) has completed the initial enhancements to the model grid for the Savannah Harbor application. The enhanced model grid will be used by the hydrodynamic model (EFDC) and the water quality model (WASP). Both models will use the same grid segmentation. The enhanced model grid will be used to simulate environmental impacts from the Savannah Harbor Expansion Project (SHEP).

The overall grid is shown in Figure 1. The enhanced grid contains 1,131 horizontal cells. The offshore extent is approximately 17.5 miles from Fort Pulaski and Oyster Bed Island measured by following the navigation channel out to sea. This is the same boundary as the TMDL grid and covers the extent of the navigation channel, however, the southwest offshore grid has been extended and fitted to the shoreline to Wassaw Island as shown in Figure 2. The offshore cells total 305 compared to 372 cells in the TMDL grid.

The enhanced grid in the navigation channel is two cells wide from toe to toe, except for turning basins where there are more grid cells. At the Elba Island Bight in Figure 3, the navigation channel is three cells wide. The enhanced grid was mapped to the navigation channel using NOAA charts and GIS data provided by the USACE Savannah District as seen in all of these figures. Near the River Street and downtown areas, the river is four cells wide total, including the two in the channel. The Kings Island turning basin is seven cells wide to account for the side areas where sedimentation occurs as shown in Figure 4, 6, and 7. The Middle and Little Back Rivers were represented as one grid cell wide and these areas are shown in Figures 5, 8, and 9.

The Tide Gate was considered as one cell with a width of 645 feet based on the as-built drawings. The Tide Gate area is shown in Figures 6 and 7. The Back River downstream of the Tide Gate is three cells wide, where the center cell is the sediment basin according to the USACE channel (Figure 6). Pennyworth and Hog Islands are included in the enhanced grid. For the navigation

channel, four cells wide are maintained up to Drakies Cut, three cells to McCoys Cut, then two cells to Abercorn Creek, and one cell up to Clio. From the top of the dredged channel to McCoys Cut is considered an area where model bathymetry is very critical for salinity intrusion results, especially because the cross-sections are extremely variable in this area.

New Cut is included in the enhanced grid, but five of the cells will have a flow barrier because New Cut is currently closed (Figure 9). This will allow future scenarios of opening New Cut to be easily configured in model production runs. Steamboat River is represented in the enhanced grid at its current width of navigability for small craft (i.e., the USGS survey). Drakies Cut will be important in future expansion scenarios so three grid cells are used to represent the width of the river shown in Figure 9. The length of Rifle Cut is comprised of three very narrow cells. McCoys Cut was configured slightly finer than in the TMDL model and shown in Figure 8. Union Creek is not included but will be handled as a freshwater inflow into the Little Back River.

Please review and provide any comments by December 20, 2004 as we are proceeding with the model calibration.

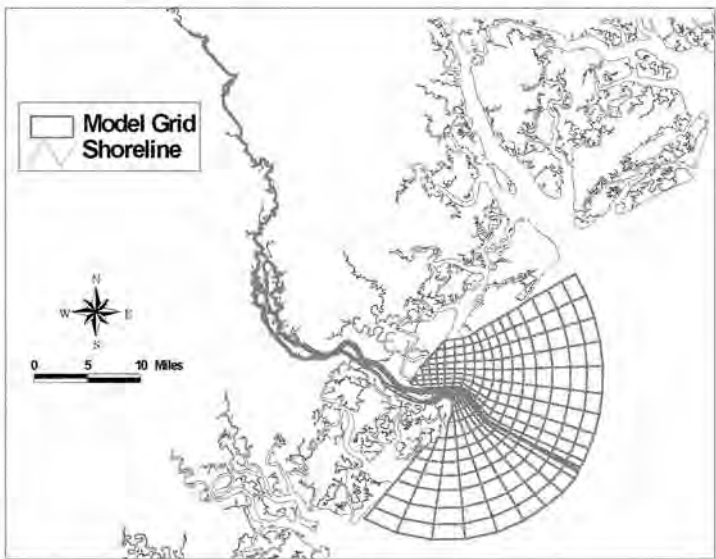


Figure 1 – Overall Location of Grid with Shoreline

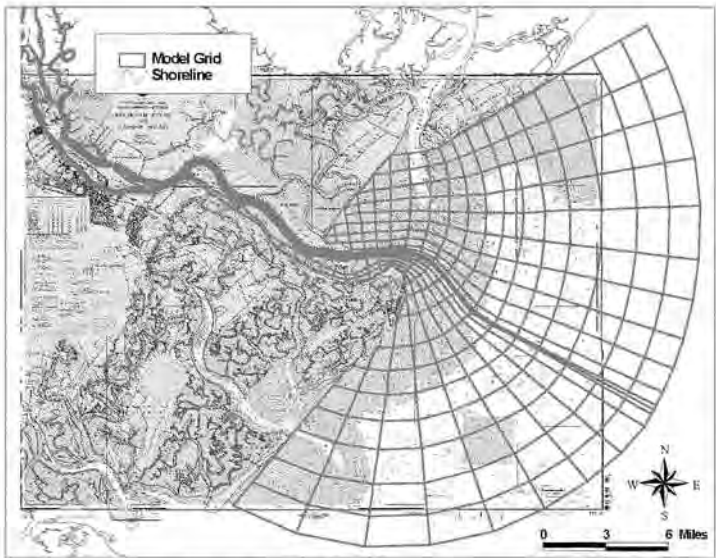


Figure 2 – Offshore Section Overlay with NOAA Chart

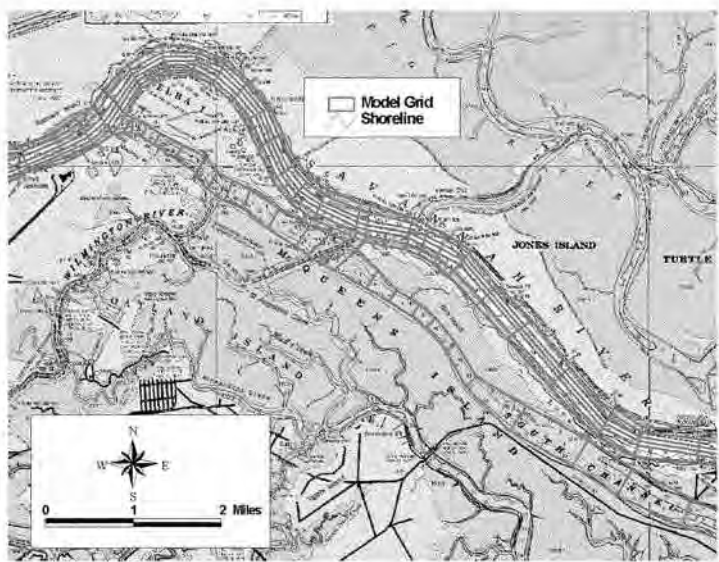


Figure 3 – Entrance Channel Section Overlay with NOAA Chart

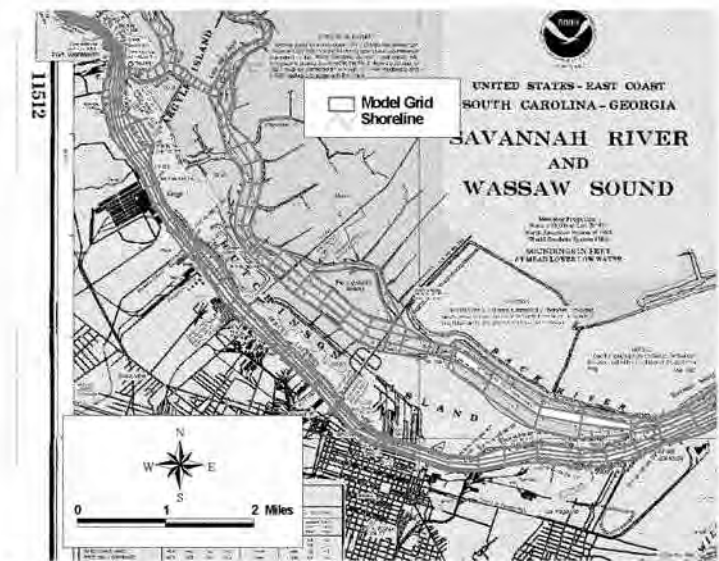


Figure 4 – Downtown Savannah Grid Section Overlay with NOAA Chart

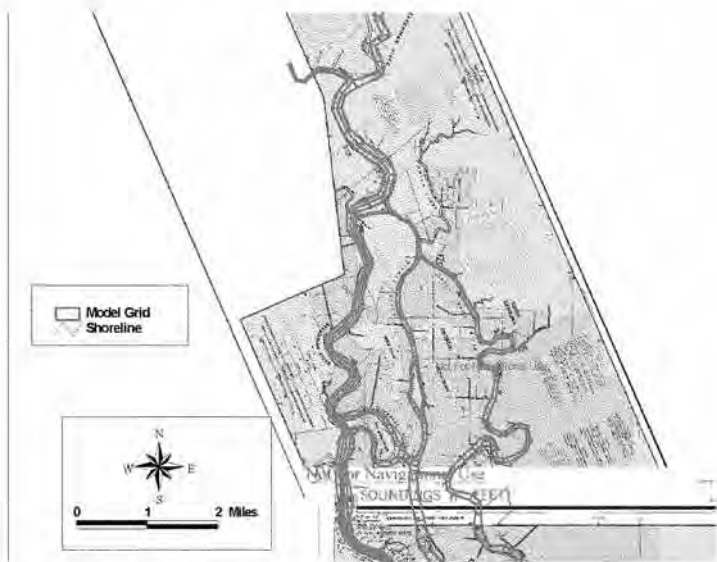


Figure 5 – Upper Savannah Harbor Section Overlay with NOAA Chart

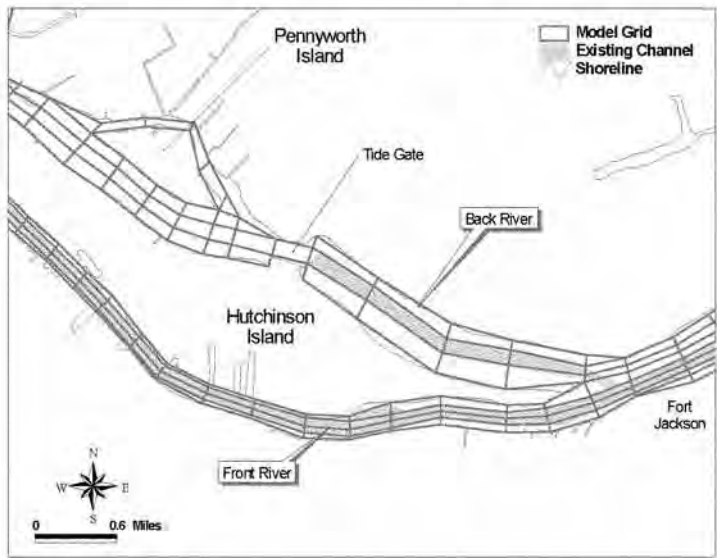


Figure 6 – Tide Gate Area

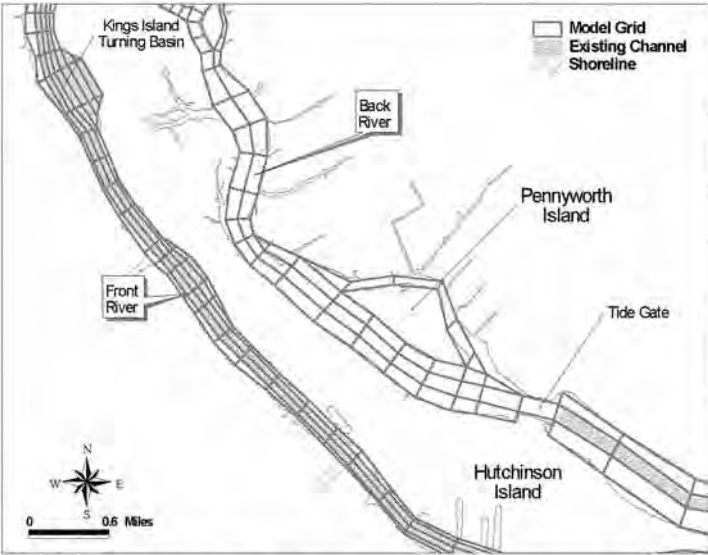


Figure 7 – Front River and Navigation Channel Including the Kings Island Turning Basin

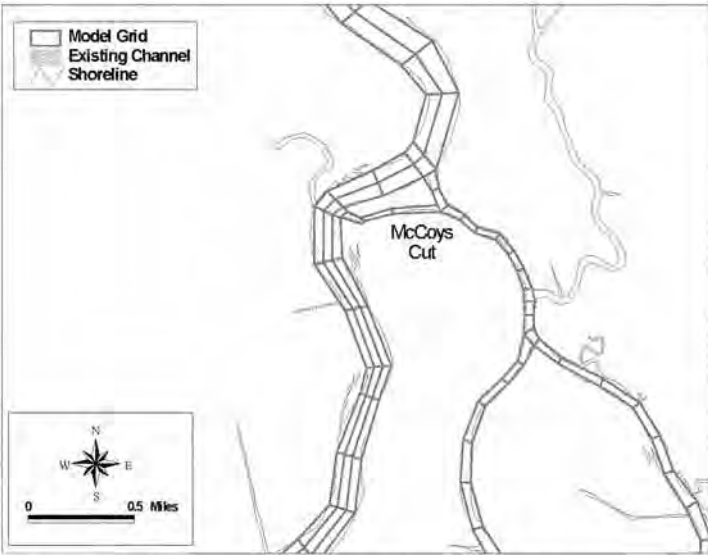


Figure 8 – McCoy's Cut between Front, Middle, and Little Back Rivers

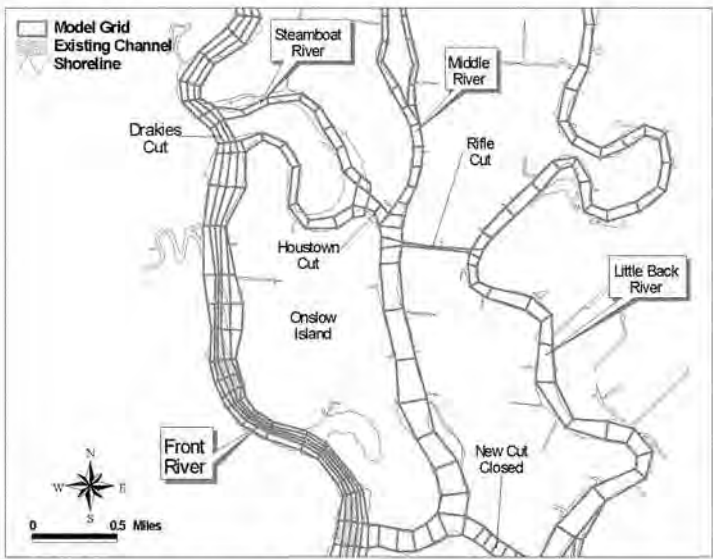


Figure 9 – Cuts in the Front, Middle, and Little Back Rivers

Meeting Minutes
Savannah Harbor Expansion (SHE) Project Model Development
January 11, 2005 at Tetra Tech, Inc., Atlanta, GA

Attendees:

Joe Hoke, USACE Savannah District
 Bill Bailey, USACE Savannah District
 Margaret Tanner, MACTEC
 Larry Neal, MACTEC
 Paul Lamarre, GAEPD
 Jim Greenfield, EPA Region 4
 Wade Cantrell, SCDHEC
 Bob Scanlon, City of Savannah and Harbor Committee
 Steven Davie, Tetra Tech
 Yuri Plis, Tetra Tech
 Will Anderson, Tetra Tech
 via conference call:

Larry Keegan, Lockwood-Green
 Hope Moorers, GPA
 Chuck Watson, Kinetic Analysis Corporation
 Sri Rangarajan, HydroQual
 Paul Conrads, USGS
 Card Smith, USACE
 John Hamrick, Tetra Tech

Meeting Agenda:

1. Overview of Tetra Tech's contract with USACE/GPA.
2. Schedule of work tasks.
3. Specific work tasks for discussion:
 - a. Update on model enhancements
 - b. Preliminary production runs & output
 - c. Uncertainty analysis (Kinetic Analysis Corporation)

Discussion Items:

- Steven Davie presented an overview of the modeling contract with the USACE, an overview of the schedule, and a status report on Tetra Tech's work. Tetra Tech is under contract to the USACE Savannah District to provide the following tasks: EFDC modifications and re-calibration, re-evaluate WASP calibration, uncertainty analysis, EFDC/WASP training, EFDC/WASP reports, and model application files.
- Modeling Schedule:
 - Initiated Work – Oct 6, 2004
 - EFDC Training – completed on Oct 26-28, 2004
 - WASP Training – To be determined
 - Draft Uncertainty Analysis – completed on Jan 7, 2005
 - Final Uncertainty Analysis – Jan 31, 2005
 - Draft EFDC and WASP Report – Feb 2, 2005
 - Final EFDC and WASP Report – March 9, 2005 (or based on agency comments)
- Model Enhancements:

- Re-fined grid resolution
- Updated bathymetry
- Marsh interactions
- New Grid Resolutions:
 - ~ 950 horizontal cells, probably end up with 900 to 950 cells.
 - 657 in TMDL grid and 1,368 in finer grid.
 - Running with 6 vertical layers.
 - Upstream boundary at Clyo ~ 61 miles from Fort Pulaski
 - Downstream boundary ~18 miles offshore from Fort Pulaski
 - Man-made connections included (McCoys Cut, Rifle Cut, Drakies Cut, New Cut closed, Tide Gate)
 - Shipping channel defined - matches channel configuration (GIS from Corps)
 - Revised enhanced grid incorporating agency comments such as smoothed channel mouth, merged two channel cells into one, merged multiple cells next to channel into one on each side for most areas, except Kings Island Turning Basin and Elba Island Bight/Sediment Basin area.
 - Handout distributed on Tetra Tech's December 10, 2004 Technical Memorandum No 1 on the grid resolution.
 - Handout distributed summarizing the grid comments was given based on December 10, 2004 Tetra Tech memo.
 - The grid convergence test has not been completed and will be discussed in the final report.
- Bathymetry Data Sources:
 - USACE Annual Surveys (1999, 2002) for the navigation channel.
 - USGS SNWR (2004) for Front, Middle, Back, and Little Back Rivers.
 - USACE Upstream of I-95 (1999) for upper Savannah River.
 - NOAA Surveys (1980's) - offshore non-channel and South Channel.
- Marsh Interactions
 - Using Q-Zones developed by ATM marsh report and implemented in the TMDL grid.
 - TMDL grid approach did fairly well except on strong spring tides.
 - Enhanced approach will use external cells inundated only during strong spring tides with wetting and drying as an option.
- Production Run Scenarios:
 - Tetra Tech has been using the TMDL grid as a "screening level" model to work out details associated with deepening production runs, such as how to represent the deepened channel and how to produce output. The USACE stated that developing a program to process and organize all output was not part of the scope but will help in future production run scenarios. (The Tetra Tech scope calls for setting up the bathymetric files for the production runs, but does not require delivery of output files.)
 - Baseline conditions were August 1999, which is consistent with EPA's draft DO TMDL, and the project conditions were the 46-foot channel. The 46-foot channel was represented in the TMDL grid by increasing the depths in the navigation channel by 4 feet (1.2 meters).
 - Habitat suitability requirements were shown through contoured plots of the grid for the following: Striped Bass (April) spawning, egg development, larval development; Southern Flounder (August); American Shad (January, May, August); and Shortnose Sturgeon (January, August).
 - Other EFDC/WASP output was discussed such as plan view of salinity and D.O. distributions, 2-D (longitudinal and vertical) distributions, salinity statistics horizontal distributions, water

volumes with D.O. increments, ship channel, entire Middle and Back Rivers, statistics of salinity responses to alternatives, Ship Channel, Entire Middle and Back Rivers, USGS gages

- **Uncertainty Analysis:**
 - Chuck Watson from Kinetic Analysis Corporation (KAC) presented preliminary results of the uncertainty analysis (UA) on the TMDL model grid.
 - KAC evaluated the quality and quantity of data available for the development of the hydrodynamic and salinity and water quality models.
 - KAC evaluated the uncertainty of the TMDL configuration of the EFDC model (aka the TMDL model)
 - KAC has made preliminary recommendations for the development of the enhanced grid model.
 - KAC concentrated on salinity – good data, checks mass transfer – with seven sets of simulations: 1) Baseline, 2) +1m Bathymetry, 3) -1m Bathymetry, 4) Friction bias to 0.0, 5) Friction bias to 0.1, 6) Bathymetry set to 1992, 7) Randomly perturbed bathymetry (10 at 10%).
 - KAC used “R” package for automated analysis and plot generation, spot checked manually using JMP (from SAS Institute)
 - KAC’s preliminary recommendations include: 1) enhanced grid model calibration should take care to avoid over calibration to 1997/1999 conditions, 2) long term data should be partitioned to include both calibration and blind test (verification) runs, 3) use of bottom roughness for calibration should be carefully examined to ensure additional uncertainty is not being introduced in the calibration process, and 4) bathymetry should be for average conditions – not just immediately after maintenance or dredging. This could be a data problem having only data before and after maintenance rather than for average conditions.

Next Meeting

Scheduled for February 16, 2005 at EPA Region 4 to review the draft modeling reports and go over comments. Agency comments will be due to Joe Hoke by February 25, 2005. Please be prepared to review the reports during this time period.

DRAFT Production Run Outputs
Discussed with USACE Savannah District
Tetra Tech, Inc.

1. EFDC and WASP TMDL production runs

- Production runs will be made with the Draft TMDL models until the value of the potential enhancements to those models are complete. If the enhancements are effective, they will be used for the final impact analysis runs.
- Description of outputs to be available to evaluate potential project impacts.
 1. D.O. concentrations will be at 0.1 mg/L increments.
 2. Tables and graphics of water volumes with D.O. increments of 0.5 mg/L
 - Navigational channel - mouth to Houlihan Bridge
 - Back River to Hwy 17 Bridge
 3. Plan view of the D.O. minimal values distribution.
 4. 2-D (longitudinal and vertical) distributions of grid cells / longitudinal sections that do not meet the SC and GA standards. The criteria will be 1-, 7-, and 30-day DO values and also the 10% deficit based on the 4.0 mg/L natural TMDL run.
 5. Tables/Statistics of salinity responses to alternatives.
 - Navigational channel - mouth to I-95
 - Entire Middle and Back Rivers
 - Show data at USGS gages
 6. Animation of production scenario results.
 7. Creating software for extracting information from the BMD files and processing with layouts' fill in.
 8. BMD file subtraction in MOVEM (will allow direct comparison of alternative with baseline).

2. Baseline Run for Water Quality

- Time-period = 30-days
- Critical period = August 1999
Use temperature and flows that occurred during that period.
- Use TMDL run with 362,000 lbs/day of total load and 132,000 lbs/day of point source load. (Assumes TMDL has been implemented by base year of 2010.) We will work with EPA on the spatial distribution of the point source load. (The beginning position is that ½ of the point-source reduction will be made in up-river sources and ½ from harbor sources.)

- Start EFDC model on June 1, 1999 and then start the WASP model on July 1, 1999 for baseline and production runs.
- Assumes water quality standard proposed by EPA in August 2004 has been adopted by GADNR-EPD.
- Assumes point source discharges are operating at their full permit levels.

**Comments on the
Savannah Harbor EFDC and WASP Model Grid
Technical Memorandum No. 1 to Joe Hoke, USACE Savannah District
Tetra Tech, Inc**

1. Commenter: Larry Keegan, Lockwood Greene

- Can we get some understanding of their reasoning and the underlying sensitivity data that supports their choice?

2. Commenter: Paul Lamarre and Roy Burke, GAEPD

- We have no additions or technical comments and recommend that Tetra Tech proceed with model calibrations.

3. Commenter: Sung-Chan Kim, ERDC, CEERD-EP-W, Vicksburg, Mississippi

- Offshore boundary: The offshore extent is approximately 17.5 miles from the entrance of the Savannah River. I believe this will be sufficient to relieve the boundary condition control for the hydrodynamics of the river. However, it will be nice to show the inside dynamics is not much affected by a range of boundary conditions (maybe by doing a couple of sensitivity runs). The extension of the southwest offshore grid makes sense because the boundary is aligned with coastline where one can pose no normal flux across the shoreline.
- Grid resolution: Two-cell wide navigation channel may be good enough for water quality modeling purpose. However, this also has to be justified by showing measured data which shows small gradient across the channel (the model should be able to resolve the gradient). If there is no data, then we may hypothesize very small variability across the navigation channel. A convergence test showing that two-cell wide channel gives similar results to many-cell wide channel may validate the hypothesis. When a sudden depth change occurs between the navigation channel and the shoal, a pressure gradient error term may become significant. This may be minimized by increasing resolution over the channel slope. However, there is no need to worry about this error term if the flux along the river is dominant compared to the flux across the river. I believe this is the case for the Savannah River. It will be good if this is supported by existing data. The Middle and Little Back Rivers were represented as one grid cell wide and I believe this is adequate. Other enhancements around the Tide Gate also seem to be adequate. Putting flow barrier in the New Cut is a good idea. All the comments given above may be backed by series of convergence test. This was required for previous modeling work by ATM. I think it may be fair to go through the similar paths.
- Summary: I have two concerns-one major and one minor. The major concern is that the convergence has not been tested. One may still argue a good calibration statistics supersedes this and I think it is a judgment call. The minor concern I have is the resolution of the navigation channel and the slope. I think it can be justified by showing little gradient across the river (from existing data). I believe the enhanced grid accommodates detailed local geometry.

4. Commenter: Paul Conrads (USGS representing USF&W Service and National Marine Fisheries)

- From the memo it was a little difficult to visually compare the enhanced grid with either the coarse or fine grid shown in the March 2004 report (figures 4-1 and 4-2). The coarse grid has approximately 50 percent less horizontal cells than the fine grid. The enhanced grid is a 17 percent reduction from the fine grid. From the memo and the report, it is difficult to see here the "savings" in cells between the enhanced and fine grids occurred.

- Resolving grids with smaller cells is a cost-benefit analysis. There is a optimum cell size and time-step where the model is numerically convergent for the state variable of interest. Refining grids past this point may be necessary to get output at desired locations or to analyze some time response. For the three grids set up for the Savannah.
- The coarse grid was created because of the need for reasonable run times in developing the TMDL. There is a balancing act between run times, output time intervals, and file sizes and the grid plays a central role in this act. Does the enhanced grid satisfy the needs of the SHEP and the TMDL?
- The tech memo does not describe the schematization of the marshes. There has been discussion of refinements of the marsh but the cell representation is not included in the enhanced grid. Will this be added latter?

5. Commenter: Jim Greenfield, USEPA Region 4

- Bottom line is the coarse grid does a good job for water quality and evaluating any changes (pollutant loadings or depths) on DO in the critical front river channel area, any enhancements would be to make the salinity predictions better in the upper portion of the model and in the middle and back rivers. Also to allow the model to better look at any possible rechanneling options.
- That said, the enhanced grid better defines the channel (4 to 6 grid cells wide) and better represents the middle and back rivers (finer grids and new up to date bathymetry). But does it do a better job??? and is it worth the cost (computer run time)?? As Paul stated a cost benefit ratio needs to be completed.
- Initial reaction, the enhanced grid is over kill - do we need the main harbor dredged channel defined by 2 grid cells wide? Is this option needed to evaluate channel deepening? Does it improve the hydrodynamics - I doubt this provides any improvement so if deepening options will not require 2 cells wide would suggest this be returned to one cell wide - again a CB ratio needed.
- Middle and back rivers - way to much detail and to many small segments that will increase run time in my humble opinion - I doubt this provides any improvement -suggest this be modified - again a CB ratio needed.
- I like the changes to the ocean portion - eliminates the "wave bouncing off the shore issue" while encompassing the whole near field ocean area. this will allow for more detailed analyses of the marsh loads from the ocean marshes (forget the name of the rivers coming in north of the harbor)
- Overall the girding is a good enhancement although to detailed - to many cells and to small of cells that will make unacceptable run times to evaluate multiple years. But it should be able to be easily modified and CB ratios developed to see what we gained or lost.
- On another note - the additional work we are conducting in examining an alternative DO standard suggest more and more we need long term runs and look at multiple years and reasons, so the run times are very critical for the DO evaluation.
- For the next meeting - I would like USFW and NMFS along with State DNR be invited so we can have a discussion on the fisheries portion and the fishery needs - we have some new tools and mechanisms to link DO, temp and Salinity Timeseries to fishery life stage needs and want to discuss this with the other agencies - also need aquatic life stage information and input specific to Savannah Harbor from these agencies.

6. Commenter: Bill Bailey, USACE Savannah District

- With the Tidgate being modeled as a single cell, would we be able to model the effects of removing the Tidgate and opening up that cross-section to its original width (basically same as adjacent 3-cell wide river)? We may need to examine the effects of such a proposal. The

proposal could include leaving the concrete sill of the Tidegate in place, so we couldn't model the increased cross-section by deepening that cell.

- I'm pretty sure that convergence testing was part of the SOW. It was section III.A.1 of one draft of the SOW. It would seem that the results of that analysis would greatly influence decisions on the acceptability of the grid shown in this Memo. I recommend that you not state that this grid is acceptable based solely on the contents of this Memo; we should wait until we see the results of the convergence testing. Presumably those results will be in the draft report Tetra Tech will soon produce, and this Memo is just a heads-up of their findings.

Meeting Minutes

Savannah Harbor Expansion (SHE) Project Model Development

February 16, 2005 at EPA Region 4, Atlanta, GA

Attendees:

Jim Greenfield, EPA Region 4
 Steve Whitlock, EPA Region 4
 Joe Hoke, USACE CESAS
 Bill Bailey, USACE CESAS
 Paul Conrads, USGS
 Paul Lamarre, GAEPD
 Wade Cantrell, SCDHEC
 Margaret Tanner, MACTEC (consultant for the City of Savannah)
 Yuri Plis, Tetra Tech
 Will Anderson, Tetra Tech
 via conference call:
 Larry Keegan, Lockwood-Greene
 Steven Davie, Tetra Tech
 Dr. Sung-Chan Kim, ERDC-EL-MS

Meeting Agenda:

1. Draft Hydrodynamic (EFDC) and Water Quality (WASP) Report sent out on February 7, 2005.
2. Status of Tetra Tech's calibration to date.
3. New Appendices of Model Calibration.
4. Initial Agency comments.

Known work items to be completed by Tetra Tech:

1. Grid convergence test
2. Marsh enhancements
3. Revised appendices based on latest model runs
4. Better salinity and D.O. calibration
5. How to deal with flows in upper basin
6. Need to clean up bad salinity and D.O. data; convert currents data
7. Chuck Watson analysis of enhanced grid model

Discussion Items:

- Dr. Kim: Statistics (MAE, RMS, etc.) are not included in appendices. Will they be included in final report? It is hard to see results on current plots. S. Davie responds: 2-week periods should be on a scale to see, will include additional statistics in final report.
- Dr Kim: Fig. 5.1 not clear – red and blue dots obscure graph. For WSE, we show 90th percentile of amplitude, but not time of maxima? In salinity, we discuss stratification and destratification--how can we assess this on a time axis? Can plot difference between surface and bottom – show vertical gradient? Can we demonstrate quantitatively that the model performs adequately? Prove the stratification/destratification events are occurring. S. Davie responds: we will revise Figures 5-1 through 5-6 so that the model shows up on top of the data. Also, time of maxima comparisons will be included in the stats tables. Also, 2-week plots will help the reviewers see the model versus data. Paul Conrads suggests: use moving window to compare surface/bottom data and results, not instantaneous.
- Tetra Tech will use the TMDL Model as the starting point for the Grid Convergence Test. They will use a smoothed channel bottom and then vary the grid size/spacing to determine when further

refinements in grid size result in no substantial changes in the model predictions. (They will compare run predictions against each other, not against measured data.)

- Paul Conrads: The distribution of flows in the Middle, Back, and Little Back Rivers are very important. The model is “freshening” (salinity going to 0) when the data does not show this. This is very important for scenarios. Tetra Tech is adjusting the marsh flows and salinity and hopes to improve the salinity calibration in the Little Back River and Middle River.
- Bill Bailey: Since Chuck Watson’s draft report indicated that an uneven bottom would improve the EFDC model’s performance, why do we show in channel thalweg figure that it is smoothed? Maybe use smaller averaging period or use closer to real data. Tetra Tech will consider using the actual channel stationing without any averaging and then compare. Instead of 5,000-foot smoothing, no smoothing or a lower interval smoothing may be more appropriate. Check the calculations on average depth from -60 to -25 (Figure 4-3).
- Paul Lamarre: Can we overlay thalweg picture somehow with shapefile? S. Davie: We can do an uncertainty run with the channel bottom varying more. We can also show the grid cells on top of the channel stationing figure (Figure 4-3).
- It will include point source locations and flow transect figures in final report.
- Union Creek flow transects add to Appendix C. Using constant inflow to Union Creek u/s boundary. Include reference map.
- Paul Conrads: Union Creek maybe more tide dominated in drought period, -in flood period, more flow dominated. Jim G.—can we do some kind of rainfall/flow analysis for Union Creek? S. Davie: we can use the Black Creek nr. Mill Creek USGS gage for a time series of flows to Union Creek.
- Wade Cantrell: Observed that integrated flows from QSER file are very high, up to 600 cms and 4 M m³. Tetra Tech needs to check and reconsider marsh flows. They are in the middle of adjusting the marsh flows.
- Wade—why not include SABSOON analysis in the report, it was in previous coarse grid report. It is helpful to show why constant boundary is appropriate, since major concern is predicting salinity, would it be helpful to do sensitivity runs for constant boundary. Tetra Tech will include the SABSOON data back in the report and show that the model represents the same signature at the boundary (i.e., constant salinity moving in and a lower salinity moving out).
- Is the model better at magnitude of change or absolute value predictions of salinity? Relative impacts of point source impacts or absolute value of dissolved oxygen? Jim Greenfield: Absolute value of salinity important, there are data issues for DO.
- Wade: about alignment of currents—what does it mean that the model axis not the same as data axis? We are still having a problem with the currents data in WRDB provided by ATM. S. Davie will send a memo to Joe Hoke requesting the raw currents files from ATM. Joe will send the memo to Larry Keegan.
- How do we request correct raw files for currents and DO? Tetra Tech will check to see if they have the raw data files used by ATM to create the WRDB. If not, Tetra Tech will send a request to Joe Hoke that can be forwarded to Larry Keegan.
- How do we ensure the proper quality control has been used on the raw data files? Paul Conrads: Currently doing analysis of FR-22-surface DO results to assess what resources it takes. This will be complete on 22 February and will then provide the procedure and results for that station to Tetra Tech.
- Paul Lamarre: Reiterated concern about absolute value predictions for salinity.
- Jim Greenfield: for appendix plots, can we put surface and bottom plots on the same page?
- Paul Lamarre: we do not see amplitude matching in salinity plots.
- Jim Greenfield: Concerns about run time. Fine grid may be necessary for “plumbing” scenarios. Can we upgrade coarse grid with new bathymetry for TMDL model predictions?

- Bill Bailey: What about the code changes we mention for marshes—needs to be documented. Address what portions of the code/model were modified and what portions were not modified and affected.
- Consider adding longitudinal plots of variables, possibly with percentiles or quartiles

BREAK FOR LUNCH

- Jim Greenfield: WASP latest version is broken.
- Dr Kim: Addressing DO results: would expect DO to decrease plots H1 and H2 during Aug 19 stratification. Jim Greenfield: WASP is broken. DO results invalid.
- Paul Conrads: Figures 8-12 and 8-13 are not referenced in the text.
- Wade Cantrell: Report indicates that nutrients are turned off in model? S.Davie: still runs kinetics but not photosynthesis. Jim Greenfield: light/dark bottle tests show photosynthesis not important. The report should explain and document this.
- Paul Lamarre: Model temperature shows higher than observed—isn't this important? Little Back 5-7 deg higher. Jim Greenfield—this should be fixed.
- Bill Bailey: report indicates p58 shallower areas should have higher CBOD decay rate, but in Table 8-8 we have 0.05 for back river?
- Paul Lamarre: Appendix G: we are over predicting ammonia. Yuri Plis: perhaps we need to lower boundary.
- Jim Greenfield: what about ammonia in the marshes? Jim Greenfield: It started with EPA rates—SOD-temp correction now 1.065, maybe 1.05 may be better late Sept-Oct? Can we do sensitivity runs for SOD-temp correction?
- Paul Conrads: Run time, what about long-term runs? Jim Greenfield: maybe TMDL model with adjusted bathymetry better for long-term runs, friction adjusted. Maybe TMDL model still viable for DO results?
- S. Davie: What else should we show in report—other nutrient parameters, vertical profiles? Longitudinal DO or nutrient percentiles? Frequency distributions of DO or salinity or both? Suggestion: Paul Conrads: maybe chemistry quartiles.
- Joe Hoke: back to EFDC, for Table D-1 make sure to put correct expectation numbers, +/- 1 deg C rather than percentile. S. Davie: we will and highlight which ones meet criteria and which ones do not meet for explanation in the text of the report.

Next Actions:

- Tetra Tech will prepare notes for the meeting and provide them to Joe Hoke.
- Reviewers will provide any additional comments they may have by COB Friday, 18 February.
- Tetra Tech will inform Joe Hoke when it will be ready to distribute the Final Report. That report will include all of Tetra Tech's revisions to the models and the report. The agencies will then review that Final Report and provide their assessment of the usefulness of the models to assess impacts on the Savannah Harbor Expansion Project.
- Check with hydrographic surveyors to see if there is any data on Rifle Cut.

Next Meeting:

Next meeting will be determined after Tetra Tech completes the final report.

**TETRA TECH, INC.**

2110 Powers Ferry Road, Suite 202
 Atlanta, Georgia 30339
 Phone: (770) 850-0949
 Fax: (770) 850-0950

TECHNICAL MEMORANDUM NO. 2

Date: March 16, 2005

To: Joe Hoke, USACE Savannah District

From: Steven Davie

Cc: Alan Garrett and Bill Bailey, USACE Savannah District

Subject: Status Report of Savannah Harbor EFDC and WASP Models
 Tt Project No. J391-02

Tetra Tech, Inc. (Tetra Tech) has been working on the final 1999 calibration and 1997 validation of the EFDC and WASP models. Based on comments and questions at the February 16, 2005 meeting at EPA Region 4, we have been addressing the calibration issues in both the EFDC hydrodynamic and WASP water quality models.

The status of the model and major improvements can be summarized in the following categories:

1. Water surface elevation in upper Savannah River,
2. Revised marsh approach,
3. Salinity stratification in the Front River,
4. Salinity in the Back and Little Back Rivers,
5. Flow calibration, and
6. WRDB data assessments.

(1) Water surface elevation in the upper Savannah River

In the February 7 draft modeling report, the EFDC model was under predicting the ebb water levels at the I-95 Bridge (FR-14). We worked on the bathymetry and longitudinal bottom elevation between Houlihan Bridge and I-95 Bridge to better simulate the water levels in the upper Front River. Figure 1 shows the Upper Savannah River and Harbor with the bottom elevations for each of the grid cells. Improvements in model predictions of water surface elevation are largely due to adjustments to the Front River bathymetry between Houlihan Bridge (FR-09) to I-95 Bridge (FR-14). The results of the calibration are shown in Figures 1-4. Figures 2 and 3 show the Houlihan Bridge location and Figures 4 and 5 show the I-95 Bridge location. According to the measured bathymetry soundings along the Front River (USGS 2004), the channel thalweg alternates from bank to bank and the channel is deepest on the outside of channel bends. In order to properly represent this for optimal model results, the thalweg was considered to be the center cell in the model grid. This is shown in Figure 6 with I = 14 being the center cell (thalweg) and I = 13 and 15 the side cells.

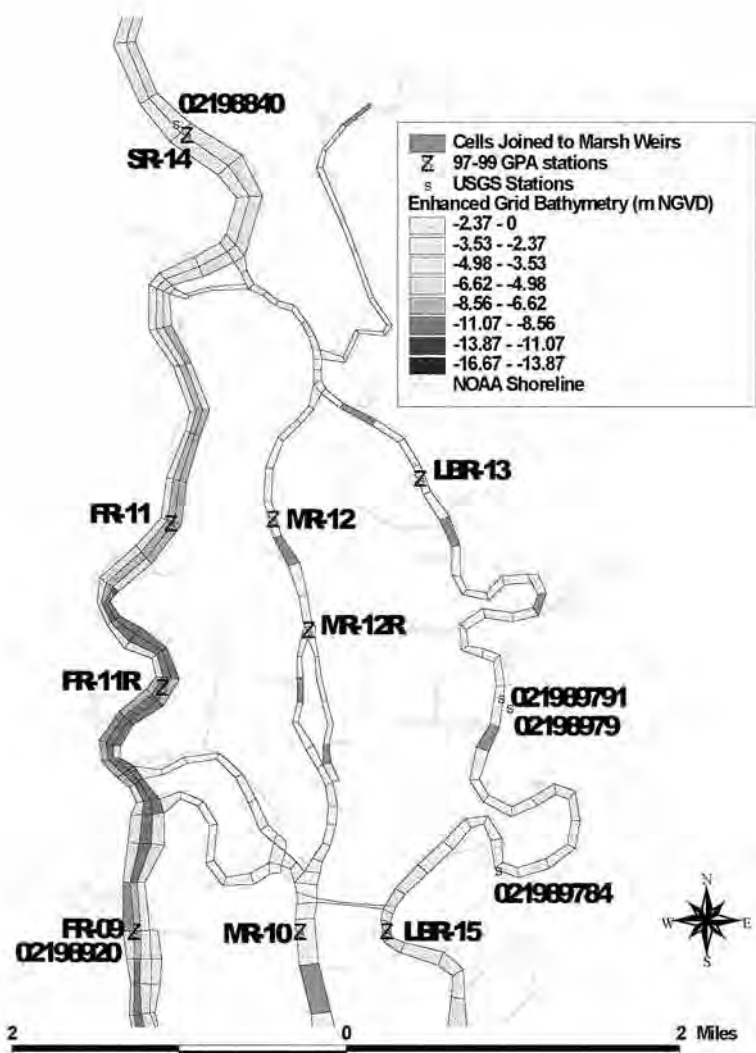


Figure 1 – Map of Upper Savannah River including Front, Middle, and Little Back Rivers

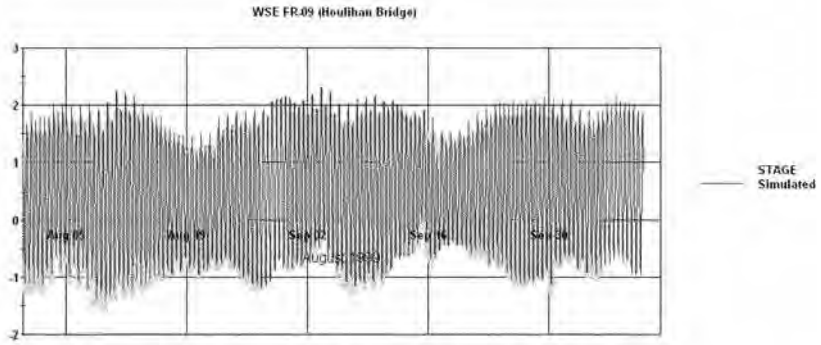


Figure 2 – 1999 Water Surface Elevation at Houlihan Bridge (FR-09)

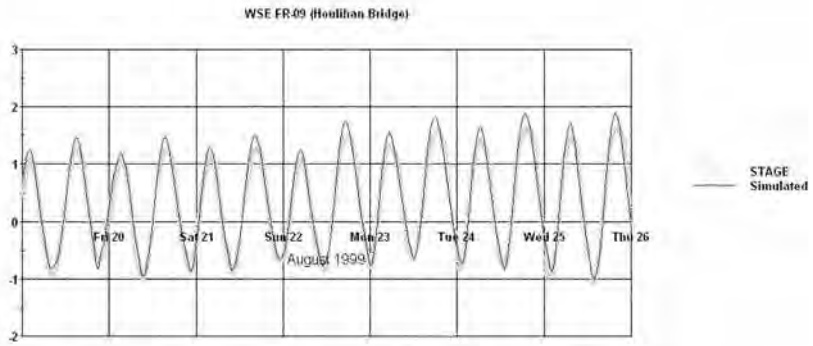


Figure 3 – August 1999 Water Surface Elevation at Houlihan Bridge (FR-09)

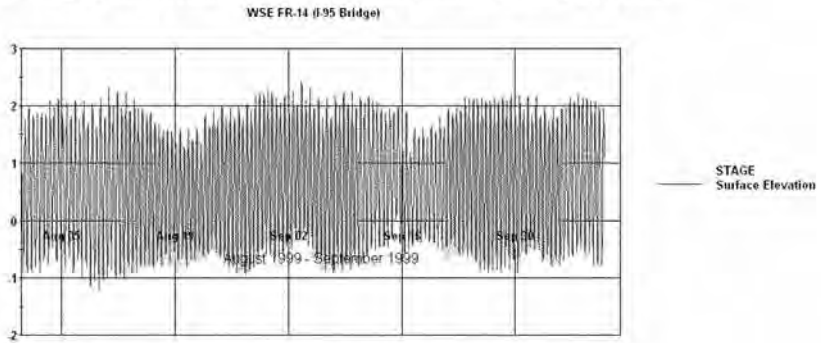


Figure 4 – 1999 Water Surface Elevation at I-95 Bridge (FR-14)

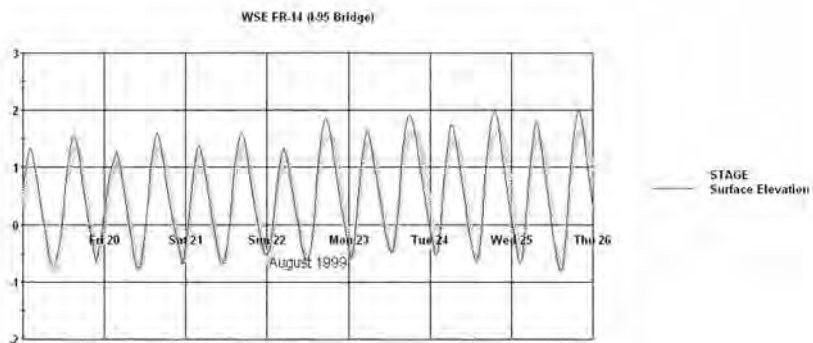


Figure 5 - August 1999 Water Surface Elevation at I-95 Bridge (FR-14)

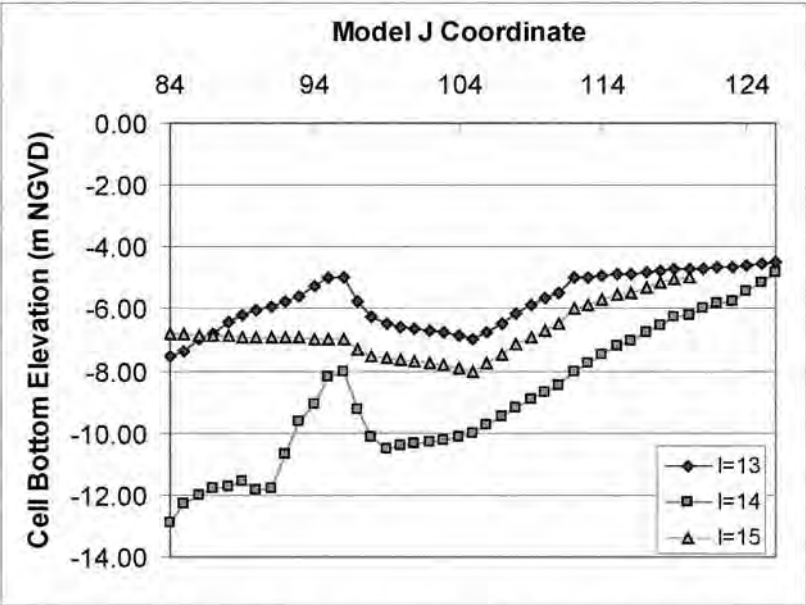


Figure 6 – Longitudinal Bottom Elevations from Houlihan Bridge to I-95 Bridge (I = 14 is the center cell and I = 13 and 15 are the side cells)

(2) Revised marsh approach

The inclusion of the marsh areas is critical to the success of the model's performance. As discussed during the February 7 meeting, the EFDC model was having difficulties simulating flows on the Little Back and Middle Rivers and we confirmed that it was due to the marsh approach. The original marsh approach was to calculate a tidal prism based on the simulated water surface elevation in the river compared to the bottom elevation of the marsh. The draft report detailed the equations used for flow, salinity, and temperature. It was discussed at the Feb 7 meeting that we were going to implement these equations in the EFDC code after we proved that they were working. The draft report flows on the Little Back and Middle Rivers appeared to reflect with one another and produces a flow that was out of phase with the data. We also tested different size marsh areas and making them very large but did not see improved results. Therefore, we decided to abandon the original marsh approach and use a function that was already in the EFDC code. The revised marsh approach entails having a marsh cell connected to the model grid through a hydraulic structure. There were 17 marsh areas added to the enhanced grid and they are listed in Table 1 and shown in Figure 7. The structure requires an invert elevation and a flow table. The marsh cell is similar to any other model cell and requires a bottom roughness and elevation. The hydraulic structure simply allows the water to move back and forth between the river and the marsh based on the water surface elevation difference. The hydraulic structures were calibrated by modifying the marsh areas and invert elevations of the structure. Table 1 below shows the marsh cell connections, dimensions, bottom elevations, and structure inverts. The Q-zones reported by ATM's "Tidal Marsh Studies Data Report" Volumes 1 and 3 (2003) were still used to determine the marsh areas. Since the marsh areas do not flood on every tidal cycle, the areas were adjusted down to 600 meters by 600 meters as shown in Table 1. There were additional marsh cells used to represent Union Creek, Upper Little Back River, and Augustine Creek that are in addition to the reported Q-zones. Union Creek was put in as a storage cell without a structure. Q zone 10 has not been added to the model at this time. We will make a map of the Q-zones for the final report.

Table 1 – Marsh Grid Cell Parameters used in the EFDC Model

River Cell		Marsh Cell		Marsh Dimensions		Bottom Elevations		Q-zone
I	J	I	J	Calculated Size (m x m)	Adjusted Size (m x m)	Marsh (m, NGVD)	Structure Invert (m, NGVD)	
23	133	23	134	1000	600	-0.7	no structure	Union Creek
28	123	28	125	1000	600	-0.6	-0.5	Upper LBR
33	123	33	125	1000	600	-0.6	-0.5	Upper LBR
39	122	41	122	1000	600	-0.6	-0.5	Q8
39	113	41	113	1300	600	-0.6	-0.5	Q8
30	92	32	92	1183	600	-0.6	-0.5	Q4
30	87	32	87	1354	600	-0.6	-0.5	Q3
36	68	38	68	1354	600	-0.6	-0.5	Q3
31	76	33	76	1354	600	-0.6	-0.5	Q3
26	95	28	95	922	600	-0.6	-0.5	Q5
22	108	24	108	1110	600	0.2	0.3	Q6
26	110	28	110	1110	600	0.2	0.3	Q6
26	116	28	116	1110	600	0.2	0.3	Q9
36	66	38	66	very large	600	-0.6	-0.5	Q2
13	104	11	104	1378	600	-0.6	-0.5	Q1
15	86	17	86	1000	600	-0.6	-0.5	Q7
13	96	11	96	2000	600	-0.6	-0.5	Augustine

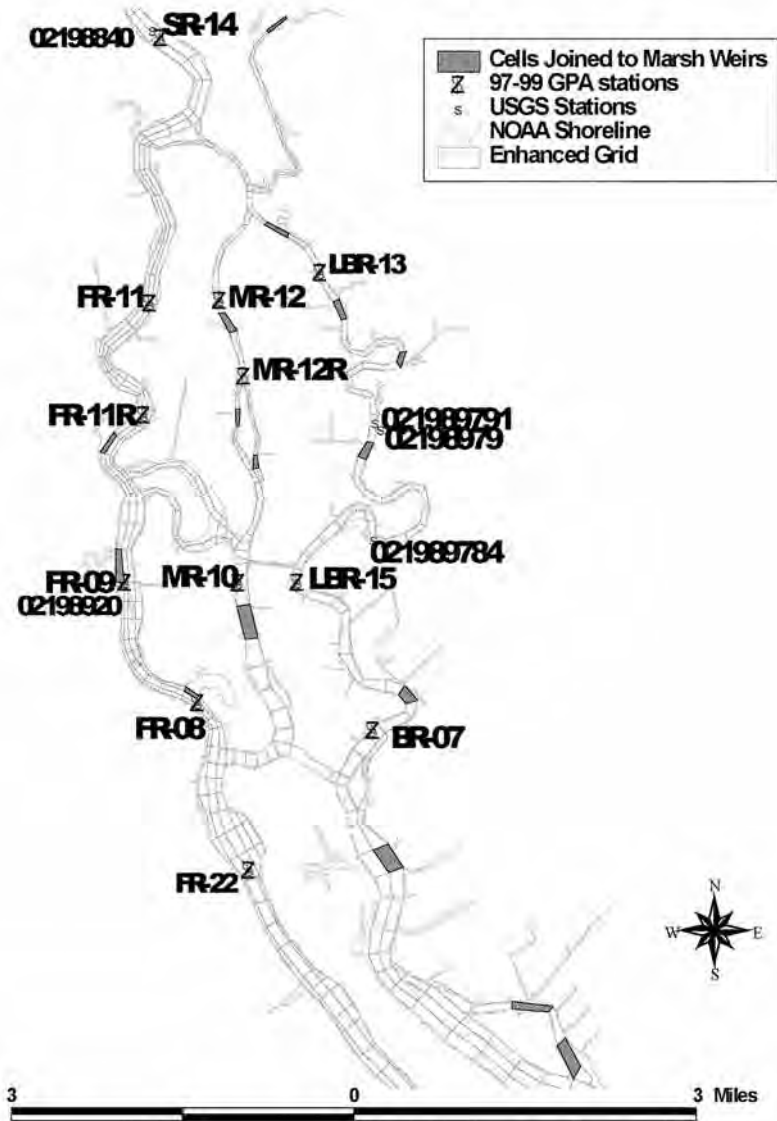


Figure 7 – 17 Marsh Locations in the Enhanced Model Grid

There were several advantages to the revised marsh approach. First, our flow calibration was much improved and the simulated flows were smoother similar to the rising and falling tides. Second, there were no changes to the EFDC code necessary since the hydraulic structures have always been in the EFDC code. Third, the salinity calibration was much improved in the Little Back and Middle Rivers as we now see the elevated levels of salinity at those stations. Fourth, we did not have to use the wetting and drying options in EFDC that would significantly lower our model time step and increase the model run times.

(3) Salinity stratification in the Front River

The EFDC calibration for 1999 has improved since the draft modeling report. Once again, we went back through the bathymetry data to confirm the deepest point of the cross-section to verify the model depths in the channel. Also, the revised marsh approach increased the tidal prism, or amount of water moving into and out of the harbor on a tidal cycle, which has improved the mixing in the channel. The more tidal prism (spring tides), the more mixing. We tried to characterize the amount of stratification and de-stratification by producing Table 2 and Figure 8 below based on Dr. Kim's comment at the Feb 16 meeting. The analysis below was performed at FR-06 for a stratified and de-stratified (mixed) period in August 1999.

Table 2 – Characterization of Stratified and Mixed Salinity Conditions

Stratified Conditions: 8/20/99 0:00 - 8/23/99 0:00		
	Mean Observed	Mean Predicted
Bottom:	23.9	21.1
Surface:	6.5	5.2
Delta:	17.4	15.8
Mixed Conditions: 8/28/99 0:00 - 8/31/99 0:00		
	Mean Observed	Mean Predicted
Bottom:	12.0	11.8
Surface:	5.5	3.5
Delta:	6.5	8.3

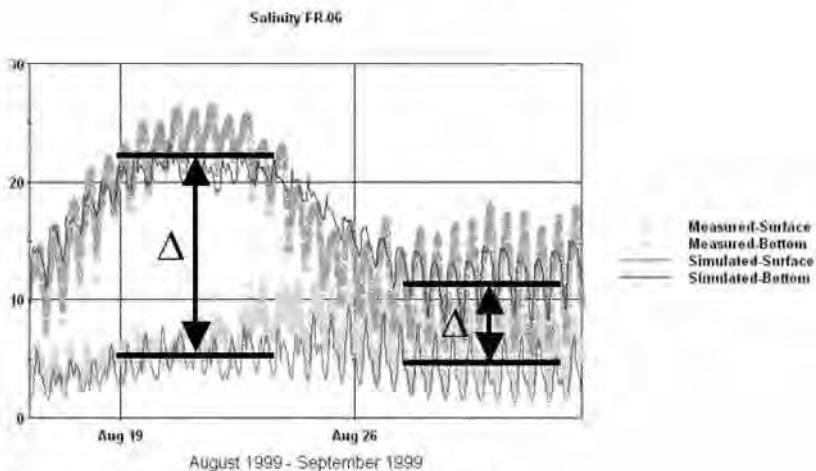


Figure 8 – Salinity Stratification at FR-06 on the Front River

Figures 9 through 12 show the model's performance on stratifying and de-stratifying at stations FR-04, -06, -08, and -09, respectively. The EFDC model is capturing the dynamics of the salinity stratification for the navigation channel. The model still under predicts the range in salinity but this is much improved from the draft report.

Figures 13 and 14 show the salinity at station FR-11R, which is 2 miles upstream of the Houlihan Bridge on the Front River. This station captures the edge of the salinity wedge as it moves out of the navigation channel downstream of the Houlihan Bridge and pushes up the river. This is a critical station to compare to the model and will be important for demonstrating the model's capabilities for future deepening scenarios. Figure 13 shows the entire 1999 calibration period and Figure 14 shows a 7-day neap event in August. The salinity pumping is evident in Figure 14 by the steepness of the salinity signal and the intrusion events go from 0 to 10 back to 0 ppt in a very short period of time.

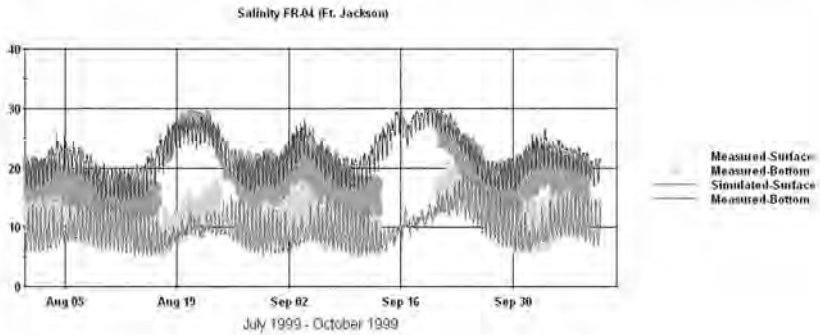


Figure 9 – 1999 Salinity on the Front River at Fort Jackson (FR-04)

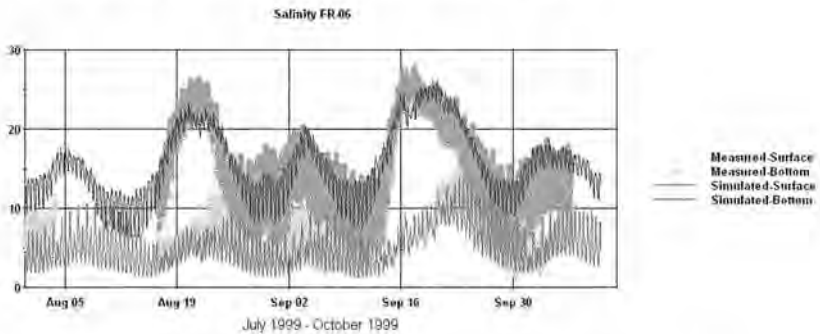


Figure 10 – 1999 Salinity on the Front River Upstream of Talmadge Bridge (FR-06)

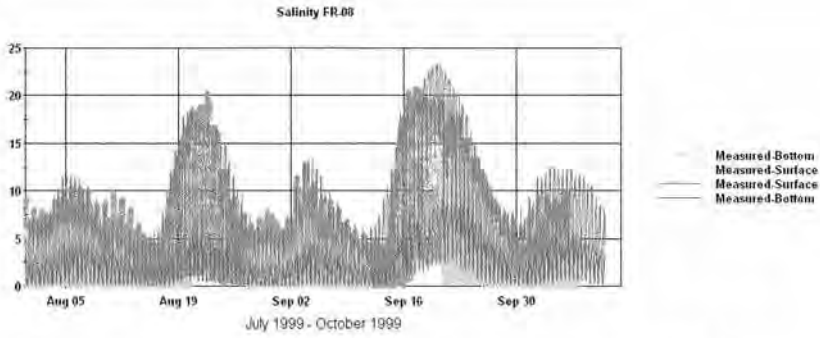


Figure 11 – 1999 Salinity on the Front River near Middle River Confluence (FR-08)

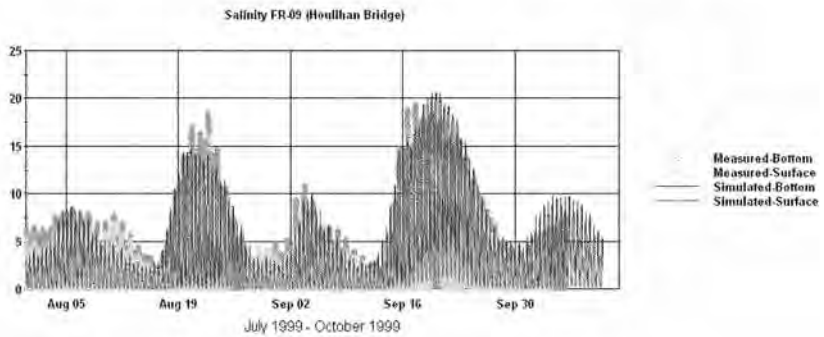


Figure 12 – 1999 Salinity on the Front River at Houlihan Bridge (FR-09)

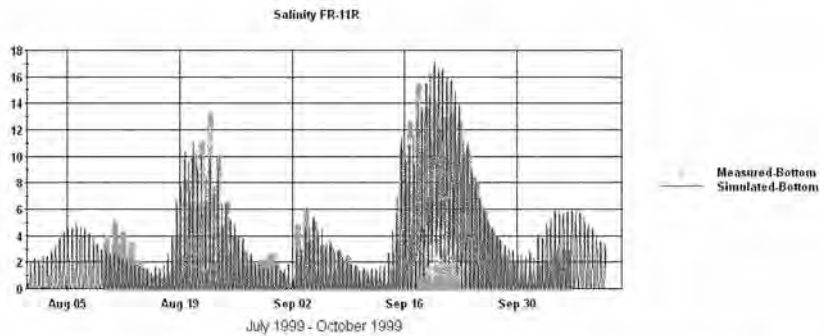


Figure 13 – 1999 Salinity on the Front River Upstream of Houlihan Bridge (FR-11R)

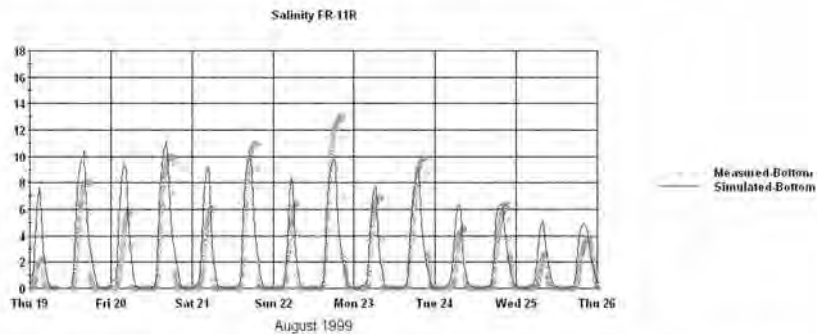


Figure 14 – August 1999 Salinity on the Front River Upstream of Houlihan Bridge (FR-11R)

(4) Salinity in the Back and Little Back Rivers

Improvements to salinity results in the Little Back River were achieved by the application of the revised marshes. The marshes serve a number of functions: including modulation of tide wave propagation, smoothing of flows in that area, and retention of water and salinity in that the Little Back River rather than completely flushing. Figures 15, 16 and 17 show the LBR-15, the UF&W Dock, and Lucknow Canal as examples of the model's performance.

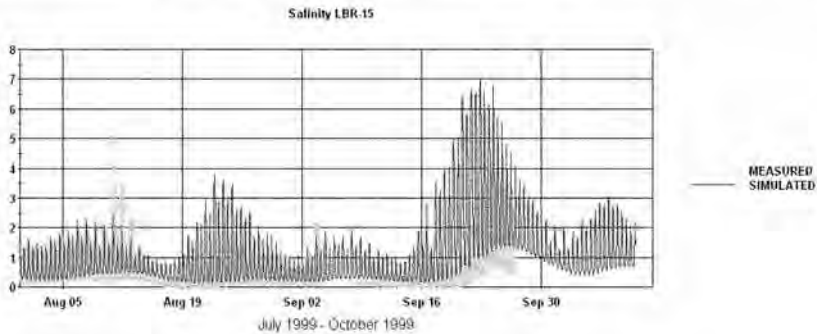


Figure 15 – 1999 Salinity on the Little Back River at Houlihan Bridge (LBR-15)

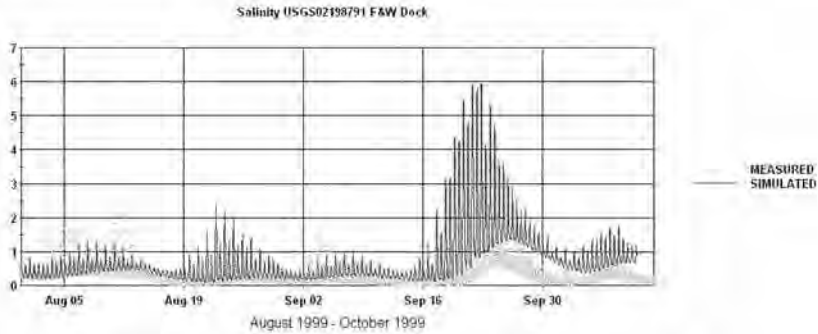


Figure 16 – 1999 Salinity on the Little Back River at F&W Dock (USGS 02198791)

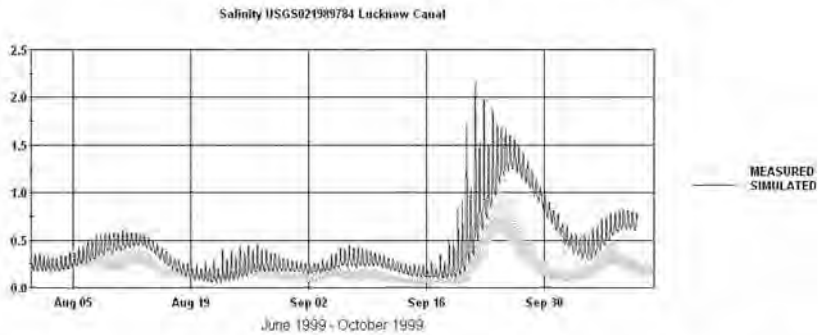


Figure 17 – 1999 Salinity on the Little Back River at Lucknow Canal (USGS 021989784)

(5) Flow calibration

The 1999 flow calibration has been completed and the 1997 validation is currently being performed. The phasing and magnitudes of the simulated flows have improved. The ebb flows are under predicting the measured flows but the flood flows are matching in magnitude and phase. Figures 18 through 21 show an example of the upper Savannah River area near McCoys Cut, I-95 Bridge, and the Middle/Little Back River connection for a spring tide event on October 6, 1999.

Transect FR1 on October 6, 1999

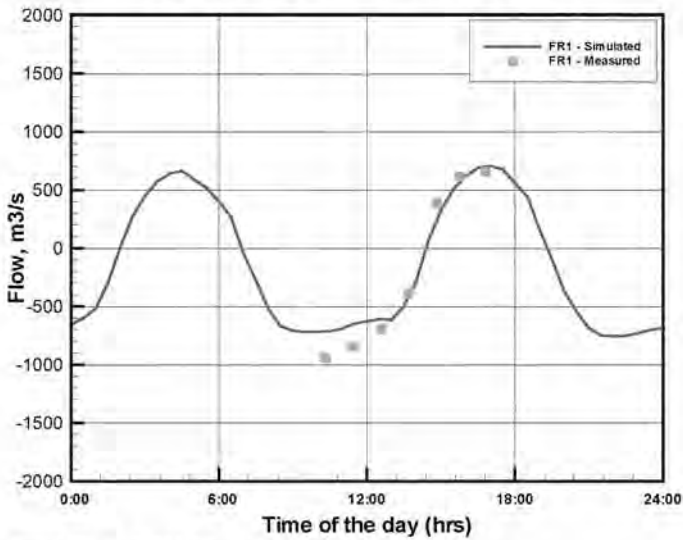


Figure 18 – Front River (FR1) Transect on October 6, 1999

Transect MR1 on October 6, 1999

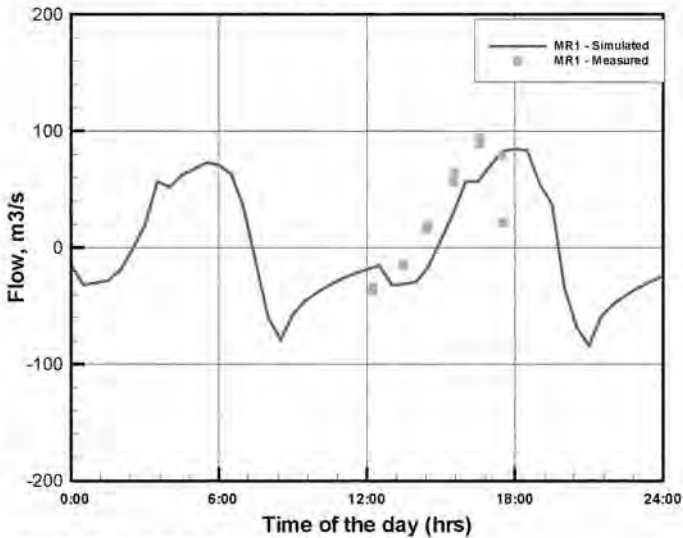


Figure 19 – Middle River (MR1) Transect on October 6, 1999

Transect LBR1 on October 6, 1999

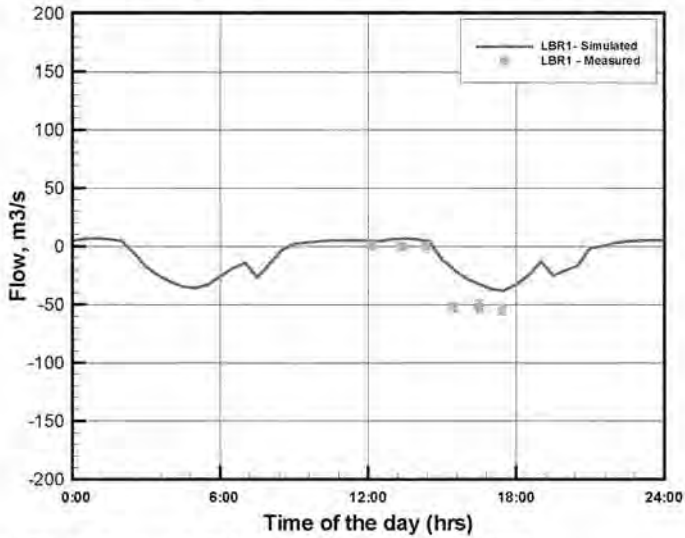


Figure 20 – Little Back River (LBR1) Transect on October 6, 1999

Transect I95 on October 6, 1999

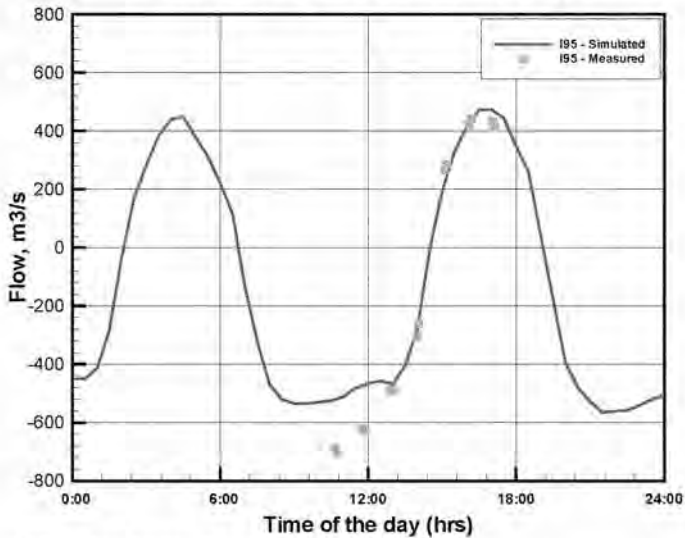


Figure 21 – I-95 Bridge Transect on October 6, 1999

(6) WRDB Data Assessment

Tetra Tech received the DVD from ATM on March 14, 2005 containing all of the raw and processed data. The original DVD did not operate so they followed up with another copy. These files are currently being updated in the WRDB for the project. Based on the data ATM delivered with their final modeling report in January 2004, there are significant differences between the final QA/QC data and what we have in WRDB. Even though this was not part of our scope with the USACE Savannah District, we are updating the WRDB with the final QA/QC datasets. For the DO data, Paul Conrads has been working on a process to document the QA/QC of the DO data. He started with the raw DO files from the instruments and ran it through USGS's protocols for adjusting or removing data from the final time series. He has completed FR-22 surface and is working on FR-22 bottom. As shown below in Figures 22 and 23, the surface station is relatively good but the bottom data has some obvious bad data points. The green points are the ATM QA/QC and the magenta are the WRDB data. We have agreed to send Paul more datasets for the critical sites for him to run through the USGS protocol.

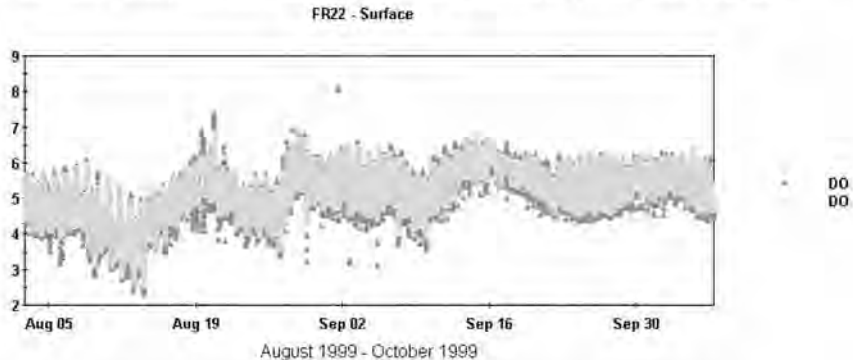


Figure 22 – 1999 Dissolved Oxygen on Front River in Kings Island TB (FR-22) Surface

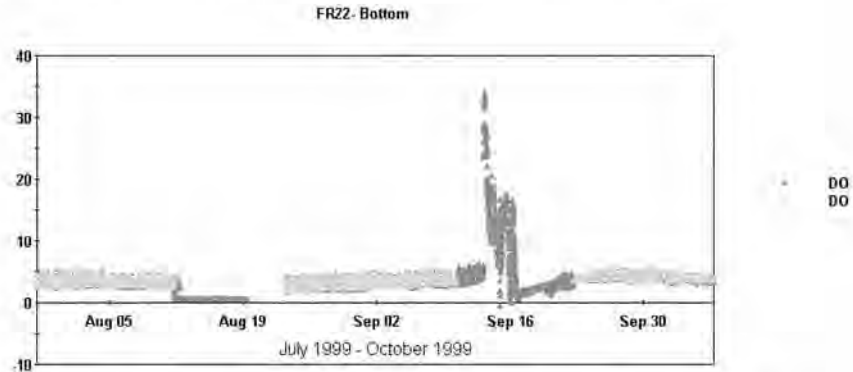


Figure 23 – 1999 Dissolved Oxygen on Front River in Kings Island TB (FR-22) Bottom



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
 REGION 4
 ATLANTA FEDERAL CENTER
 61 FORSYTH STREET
 ATLANTA, GEORGIA 30303-8960

DE
PM-C

AUG 25 2005

Colonel Mark S. Held
 District Engineer
 Savannah District
 P. O. Box 889
 Savannah, GA 31402-0889

g. DE
DC
DP
DX

Subject: **Final Report - Hydrodynamic and Water Quality Model for the Savannah Harbor [May 20, 2005]**

Dear Colonel Held:

The U.S. Environmental Protection Agency, Region 4 (EPA) has completed its review of the subject report prepared by Tetra Tech (TT) for the U.S. Army Corps of Engineers - Savannah District (District). The report and its appendices describe the hydrodynamic, salinity transport, and dissolved oxygen models being used to characterize ambient conditions in the Lower Savannah River and Harbor environs. These documents also discuss the specifics as to how these models will be applied to predict water quality impacts based upon changes in pollution loading and proposed Harbor dredging. The documentation also includes information related to model calibration, validation, and confirmation.

Because this river system is complex hydro-dynamically, it was necessary to develop these water quality assessment tools in an evolutionary manner. TT originally formulated the Environmental Fluid Dynamic Code (EFDC) model for EPA to use in determining the Total Maximum Daily Loading (TMDL) for dissolved oxygen conditions in the Savannah Harbor. TT has subsequently updated/modified this model with a higher resolution model to better evaluate the water quality impacts of the various harbor dredging scenarios to enhance the navigation channel.

While the above report addresses most of the comments/concerns cited by EPA in its previous review of the TMDL model report, we understand that a more detailed analysis is currently underway to further document the model's application/performance. Jim Greenfield of my staff has been involved in the on-going water quality modeling efforts and is confident that any remaining issues can be addressed after additional model sensitivity runs are performed and evaluated.

The model development and review for upgrading Savannah Harbor has been a long and demanding process for all stakeholders. However, it is encouraging that we are in the final stages of producing an acceptable model for use in making the critical water quality decisions regarding this Harbor project and the TMDL. We will continue to provide support for the successful completion of this water quality modeling effort which is a priority for both of our Agencies.

Sincerely,

A handwritten signature in dark ink, appearing to read 'J. Giattina', with a long horizontal flourish extending to the right.

James D. Giattina, Director
Water Management Division

From: [Hoke, Joseph T SAWatSAS](#)
To: [Ed Eudaly \(F-mail\) \(F-mail\)](#); [Jini Greenfield \(F-mail\) \(F-mail\)](#); [Paul Conrads \(F-mail\) \(F-mail\)](#); [Paul Lamarre \(F-mail\)](#); [amtk-Brownell, Prescott](#); ["Roy Burke" \(F-mail\)](#); ["Wade Cantrell" \(F-mail\)](#); [Kim, Sung-Chan ERDC-FL-MS](#); ["Larry Turner" \(F-mail\)](#)
Cc: [Larry Keegan \(F-mail\) \(F-mail\)](#); [Steven Davis \(F-mail\)](#); [Bailey, William G SAMatSAS](#); [Garrett, Thomas A SAS](#); [Rees, Susan I SAM](#)
Subject: Sav Harbor Hydrodynamic and WQ Model Calibration Report Review
Date: Thursday, November 17, 2005 3:02:21 PM
Attachments: [Oct26_Model Review Meeting_b.doc](#)
[TechMemo3\(rw\).pdf](#)
[PeerReviewInternal1105.doc](#)
[kac_recs1.pdf](#)
[mfr_kac_resp.doc](#)
[Hydrologic Monitoring Plan draft.doc](#)
Importance: High

Hydrodynamic and WQ Model Review Group:

This is to document the results of the 26 October meeting, provide an updated Tech Memo #3, of which you received a draft copy at or just before the meeting, and describe the next steps that we plan to take in this modeling effort. There are six attachments. The first, Oct26_Model Review Meeting_b.doc, contains a summary of the discussions that took place at the meeting. The second attachment, TechMemo3(rev).pdf, contains the revised Tetra Tech responses to review comments on the calibration report. It has been updated and expanded to incorporate feedback received at the 26 Oct meeting. The third attachment, PeerReviewInternal1105.doc is the updated Tetra Tech responses to the ITR comments. These have been expanded from what you saw at the meeting, by additional plots in Comment I, more of Dr. Hamrick's e-mail in Comment II, and a few typo corrections in Comment IV.

The fourth attachment, kac_recs_1.pdf contains the KAC recommendations for additional study.. As you recall, during our discussion of KAC's recommendations, there were some items that needed clarification, which I was requested to obtain via e-mail. The fifth attachment contains the Corps of Engineers proposed response to Mr. Watson's recommendation letter, mfr_kac_resp.doc, as well as the clarification questions to and responses from Chuck Watson of KAC. The sixth attachment is the preliminary draft monitoring plan referenced in the mfr. Please let me know if you concur with this proposed response; or, if you disagree with the proposed response, please state what action(s) you think should be taken.

Each agency had previously stated that we could move forward with our analysis of project impacts, subject to having their comments satisfactorily addressed prior to the final impact analysis. Please confirm that (1) you continue to support this position and (2) these responses satisfactorily address your technical concerns. The final calibration report, and final agency determination on the model's acceptability, will be delayed pending completion of the USGS QA/QC checks of the ATM data so that the final model performance comparisons can use the data sets that have received the accepted quality control procedures. Our aim is for official agency acceptance of the models after review of the final report.

We request that you review this information and let me know via e-mail if you have any outstanding issues with the model calibration, and if you concur with the direction we are taking. Please respond by 29 Nov 2005. Thank you very much for your assistance.

Joseph T. Hoke, Jr., P.E.
 Hydraulic Engineer
 U.S. Army Corps of Engineers
 (912) 652-5516
joseph.t.hoke@usace.army.mil

**TETRA TECH, INC.**

2110 Powers Ferry Road, Suite 202

Atlanta, Georgia 30339

Phone: (770) 850-0949

Fax: (770) 850-0950

REVISED TECHNICAL MEMORANDUM NO. 3

Date: October 25, 2005, Revised on November 14, 2005

To: Agency Technical Review Group

From: Steven Davie

Cc: Joe Hoke, Alan Garrett, and Bill Bailey - USACE Savannah District

Subject: Response to Agency Comments on the Savannah Harbor Models
Tt Project No. 16807-01

Tetra Tech, Inc. (Tetra Tech) has been developing the EFDC and WASP models for the Savannah Harbor Estuary. During this effort, Tetra Tech has developed two prior memorandums to communicate with the Agency Technical Review Group. Technical Memorandum No. 1 was distributed on December 10, 2004 dealing with the model grid enhancements. Technical Memorandum No. 2 was distributed on March 16, 2005 that entailed an update on the EFDC and WASP calibrations. This memo (No. 3) is a response to the agency comments outlined in the meeting on June 16, 2005 in Atlanta, Georgia.

During the June 16, 2005 meeting, the federal and state agencies made comments on the Final Modeling report dated May 20, 2005. The purpose of this meeting and discussion was to have an additional round of comments to address any concerns dealing with the model calibration. Agency letters were submitted to the USACE Savannah District that approved moving forward with the model while addressing the group's comments satisfactorily. The group had a wide-ranging discussion at the June meeting and the comments were categorized into 12 topics. The paragraph on the next page was the group's attempt to develop categories for the comments that describe the amount of effort expected to address a concern. The following discussion presents each of the 12 comments and Tetra Tech's response. These comments and responses were discussed at the October 26, 2005 meeting in Atlanta, Georgia. These issues will be considered further before using the models to identify impacts of the recommended plan.

Ways to address concerns with the models and the reports

The group categorized the concerns according to the level of action that is appropriate to fully address each concern. The following four categories were developed, roughly in order of the effort expected:

- A Explain better in the report, no modeling action needed.
- B Keep in mind when interpreting the model results.
- C Additional sensitivity model runs are needed.
- D Recalibrate / revise model.

(note: a "C" action could turn into a "D" action depending on the results)

Summary of concerns and actions to address each concern [option from above]:

COMMENT 1: [B] Marsh water quality loads:

- a. [A] Inclusion in the enhanced grid
- b. [A] Equal comparison between the TMDL and enhanced grids
- c. [C] Is the CBODu too high?
- d. [C] Mass exchange – flows and concentration
- e. [C] Surface to bottom – CBODu vertical differences are a function of how marsh areas were loaded into the enhanced model

RESPONSE 1:

- a. The enhanced grid contains 16 marsh cells: 3 along Front River, 4 along Middle River, and 9 along Back River. TMDL model grid had 9 marsh cells along Middle and Back River. Areas of TMDL model marshes were set in accordance with ATM Q-zones assessments. Marsh areas of enhanced grid model were based on the same Q-zone areas and adjusted during calibration process for capturing flows and salinity trends in upper part of estuary.
- b. Total marsh CBODu loads for enhanced grid water quality model were set up equal to total marsh CBODu loads of the USEPA TMDL model (Greenfield, 2004). The last ones were quantified based on field measurements. The 9 TMDL model marsh loads were redistributed between 16 enhanced model marsh loads in accordance with their locations and areas.
- c. The surface layer values of CBODu were too high in the calibration report. At that time, we were adding the loads from the marsh areas to the surface layer only. After our modification described in (e) below, the surface layer values are much lower and closer to the data.
- d. Similar to the response (e), we feel that after the adjustment to the marsh loads, the mass exchange is more appropriate in the top three layers and the model results are closer correlated to the data.
- e. Initial approach presented in Tetra Tech Report (May, 2005) was to input marsh CBODu loads in the surface layer (Figure 1). During the June meeting, there was a concern about high CBODu model results compared to the data and the stratification of CBODu in these areas. To address the concern Tetra Tech found it was appropriate to redistribute the loads between top three layers. The results of revised approach are shown in Figure 2 as an example on the Middle River (MR-12R). The load redistribution does not show any noticeable effect on CBODu and dissolved oxygen dynamics on the Front River.

RESPONSE 1 SUMMARY: Tetra Tech revised the WASP model by spreading the marsh loads into the top three layers instead of the surface layer only.

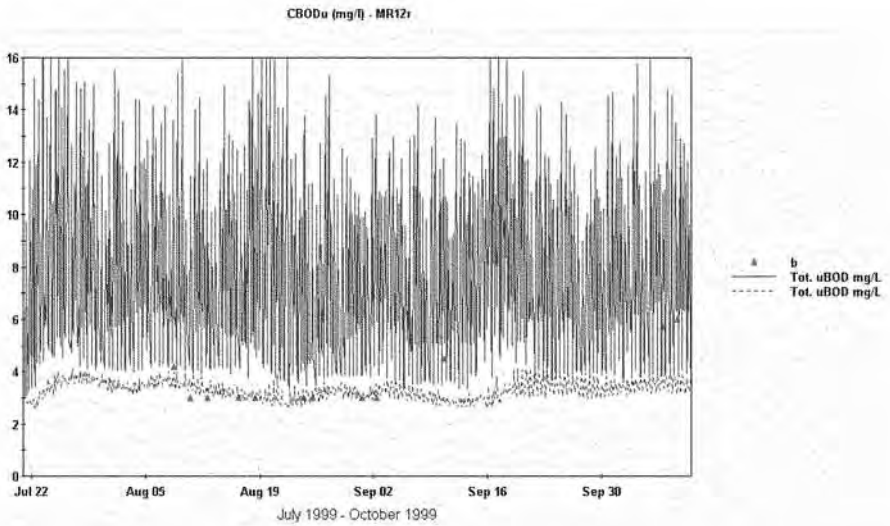


Figure 1 - Loads in the Surface Layer as Presented in the May 20, 2005 Report

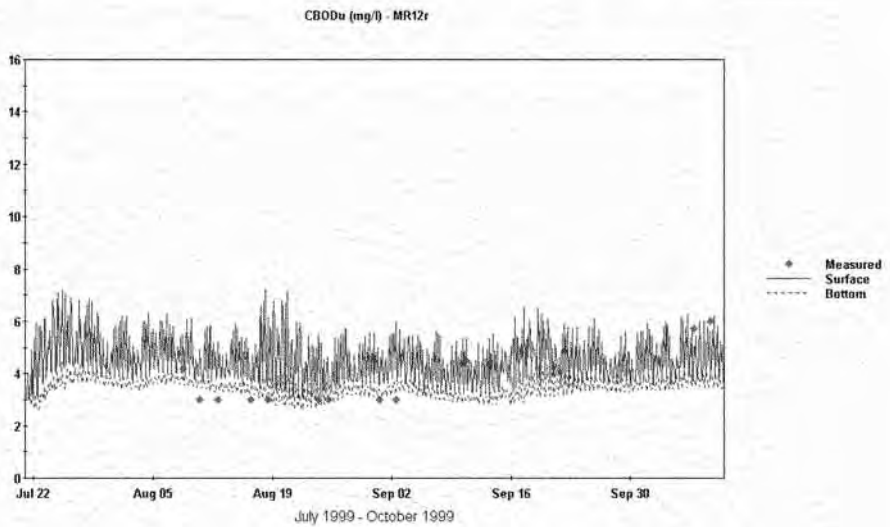


Figure 2 – Revised Approach with the Loads in the Top Three Surface Layers

COMMENT 2: [C] Offshore boundary:

a. Salinity 34 to 36 ppt versus 32.5 to 35 ppt, Mass flux surface to bottom – may need to re-distribute at FR-26.

RESPONSE 2a: The calibration boundary was determined to be a best-fit linear function from 32.5 ppt (surface) to 35 ppt (bottom). The issue was raised that based on "World Ocean Atlas" annual means, that regional annual mean value of surface salinity may be in the range 34-36 ppt. For comparison, data from Sabsoon site R2 that is located approx. 50 miles offshore from the mouth of the Savannah River indicate mean surface salinity of 36.0 ppt (range 31.5-36.5 in the period 1999-2002), however, this site is much farther from the effects of littoral freshwater inflows than the model boundary 17 miles offshore from Oysterbed Island. To assess model sensitivity and the possibility of improving the calibration, the EFDC model was run for 35 ppt (surface to bottom) and 36 ppt constant boundary conditions. Results were increased salinity in the lower Front River both at the surface and the bottom. As expected, predicted salinity was increased more at Ft. Pulaski (FR-26) than upstream at sites such as FR-08, for example. Results are shown in Figures 3 through 6 for FR-26 and FR-08. We conclude that increasing the offshore boundary condition for salinity does not improve the calibration.

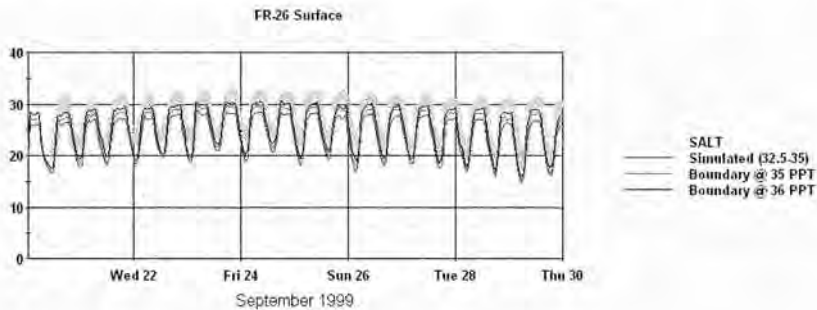


Figure 3 – Salinity Comparisons at FR-26 at the Surface

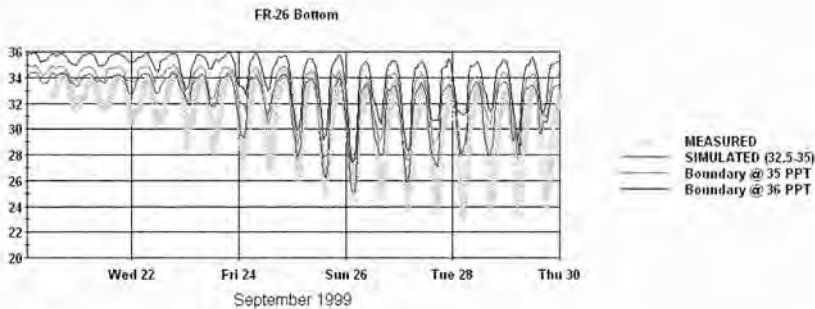


Figure 4 – Salinity Comparisons at FR-26 at the Bottom

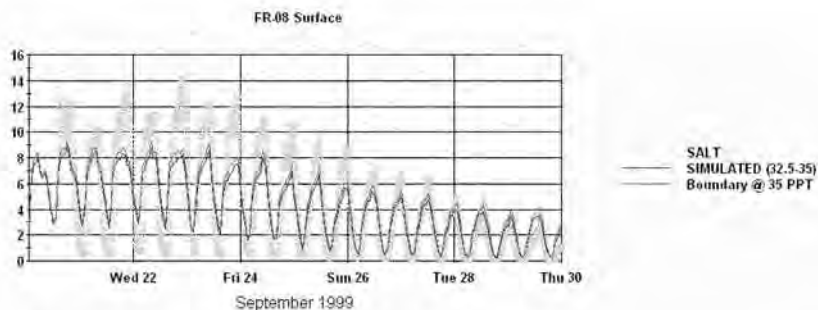


Figure 5 – Salinity Comparisons at FR-08 at the Surface

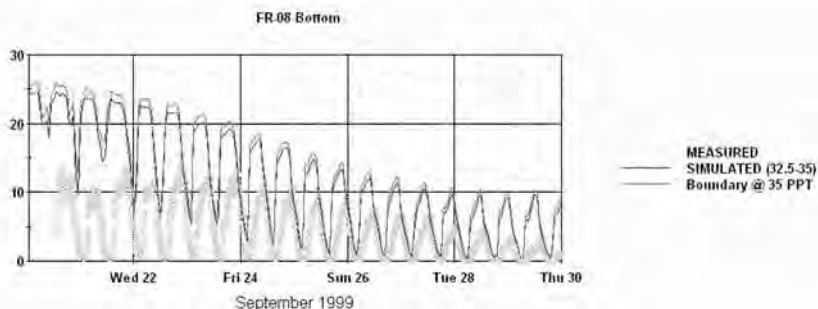


Figure 6 – Salinity Comparisons at FR-08 at the Bottom

b. Dissolved oxygen saturation 95 to 105% versus 90%

RESPONSE 2b: The water quality model calibration used an offshore dissolved oxygen boundary condition was approximately 6 mg/L for August 1999 (USEPA TMDL water quality model, Greenfield, 2004). Sensitivity tests were run for August 1999 calibration input. The dissolved oxygen boundary variations were set up as +/- 15%. The estimates of 10th and 50th percentiles were used for evaluation of the sensitivity. Tetra Tech agrees with 95-105% that was proposed for consideration by the Interagency WQ Team. 105% will be close to the used in sensitivity tests value (7 mg/L). The sensitivity analysis shows that the influence of the offshore D.O. boundary positive variation is most significant for bottom layers of downstream stations FR-02 (+ 13%), FR-04 (+ 8-9%), FR-06 (+6-8%), FR-21 (+ 5-8%), and FR-22 (+3-6%). The boundary effect becomes insignificant after FR-22. Surface layers of the model demonstrate low sensitivity to offshore D.O. boundary concentration variations. For these reasons, Tetra Tech is comfortable adjusting the downstream boundary condition from 90% to 95% of saturation.

c. Temperature

RESPONSE 2c: Summer (July-Sept.) mean surface temperature values were discussed at the offshore boundary in the range 28.0-28.5 degrees C from the "World Ocean Atlas." For

comparison, mean surface temperature at Sabsoon R2 was calculated to be 27.6 degrees for 1999-2002. For the EFDC model, the temperature data from Station R2 were applied as the ocean boundary condition. These data were not available for the calibration period, only later time periods, so a harmonic sine curve with a least squares fit was used to develop a seasonal temperature boundary. For the 1999 model year, summer (July-Sept.) surface temperatures averaged 27.0 degrees. We do not believe that altering the temperature boundary condition would improve the calibration.

d. Larry Neal gave info "World Ocean Atlas 2001" with data

RESPONSE 2d: Tetra Tech used the "World Ocean Atlas" data in the discussions in 2a, 2b, and 2c.

e. CBOD decay rate – confirmed 0.5 multiplier on ocean cells

RESPONSE 2e: Tetra Tech confirmed that a 0.5 multiplier was used in the ocean cells ($j = 8$ to 15) and then adjusted back to 1 coming in the mouth of the river.

COMMENT 3: [C] Surface salinity:

a. Model appears to under predict surface salinity on the Front River. How does this impact the marsh succession modeling? The EFDC will output salinity for the neural net application, which feeds the marsh succession model. Right now, the neural net is using the USGS gages located between the Talmadge Bridge and I-95, located on Front and Back Rivers. These gages are considered to be mid-depth. The EFDC model is predicting salinity well at the bottom and at mid-depth but under predicting salinity at the surface.

RESPONSE 3: The model does under predict surface salinity in the Front River. Our response is discussed in 2a dealing with the offshore boundary. We do not believe it is related to the boundary, but rather related to the amount of mixing along the navigation channel. For the upper stations near the wildlife refuge, the model predictions match the data better for salinity peaks. For the marsh succession modeling, the EFDC model will deliver output to the Model to Marsh (M2M), which in turn, will deliver output to the Marsh Succession Model. Tetra Tech has developed a linkage with the M2M that passes model predicted deltas of salinity and water level in an output file. Originally, the M2M was using only the USGS gaging stations, but now uses additional sites. The specific locations and vertical layers (K-index) are described in the Table 1 below. K-index of 1 is the bottom layer and K-index of 6 is the surface layer.

Table 1 – Locations of Output for M2M Application

No.	Name	I-index	J-index	K-index
1	'WL8840'	14	127	
2	'WL8920'	14	95	
3	'WL8979'	39	114	
4	'WL8977'	13	59	
5	'WLGPA10'	26	96	
6	'WLGPA11'	14	113	
7	'WLGPA11r'	14	106	
8	'WLGPA12'	26	117	
9	'WLGPA12r'	26	113	
10	'WLGPA13'	31	123	
11	'Sal8840'	14	127	4
12	'Sal89784'	39	114	4
13	'Sal8920'	14	95	4
14	'Sal89791'	30	106	4
15	'SalGPA10'	26	96	6
16	'SalGPA11'	14	113	1
17	'SalGPA11r'	26	106	1
18	'SalGPA12'	26	117	1
19	'SalGPA12r'	26	113	6
20	'SalGPA13'	31	123	1

COMMENT 4: [A & B] Ebb flows and currents:

a. Under prediction of the ebb flows and currents on the Little Back and Back Rivers

RESPONSE 4: Tetra Tech agrees that we are still under predicting the ebb flows only during spring tides. During neap and mid-tides, the model captures the flood and ebb flows well. During the spring tides, when we have a larger variation in water level from high to low tide, there is a significantly larger volume of water draining the estuary (ebbing) that the model is not capturing. We believe this is related to additional storage in the system in the marsh areas, irrigation ditches (Lucknow Canal), groundwater zones, etc. We are not sure why and have been comparing the measurements to explain where the additional water is coming from. We added more marsh storage to the model and did not see an improvement in our ebb flows. There is a longterm monitoring plan being developed by the federal agencies that will entail measuring continuous flow at the Front, Middle, and Little Back Rivers to improve our knowledge of the flow regime in the upper part of the estuary.

COMMENT 5: [A] Water level at SR-17 on the Upper Savannah River

- a. Potential of adding marsh storage areas upstream of I-95 Bridge
b. Show comparisons at the USGS Hardeeville gage (show plot)

RESPONSE 5: Discussion of the EFDC model calibration raised the issue of the discrepancy in water surface elevation (stage) predictions at SR-17, which is an upstream site in the Savannah River, approximately 14 miles upstream of I-95. The model calibration under predicted stage and over predicted the magnitude of tidal oscillation, shown in Figure 7. It was hypothesized that the model was not accounting for the effects of marsh storage in the upper Savannah River (above I-95 Bridge). It was found that creating five marsh cells in the upper river dampens the tidal oscillation to the approximate range (~ 0.15 m or 0.5 ft) shown in the data (Figure 7). Furthermore, by increasing the bottom roughness on the Savannah River upstream of I-95, the baseline stage was increased resulting in an improved calibration at this site (Figure 8). The additional stage calibration in the upper Savannah River does not change the overall salinity results in the harbor. Based on the discussion and recommendations at the October 26 meeting, Tetra Tech will alter the EFDC model to improve the water surface elevation calibration in the upper Savannah River.

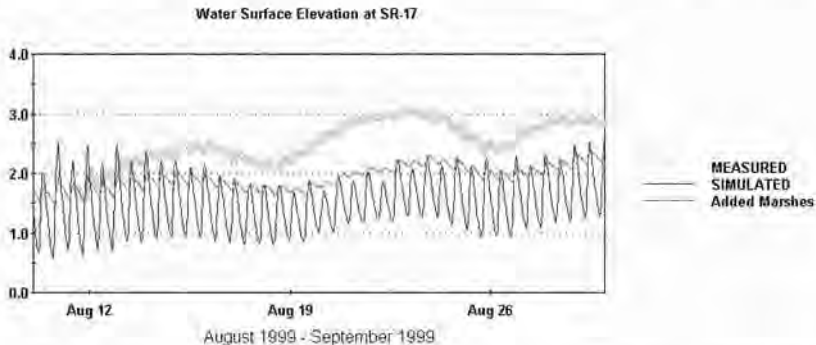


Figure 7 – Water Level at SR-17 with added marsh areas compared to May 2005 calibration

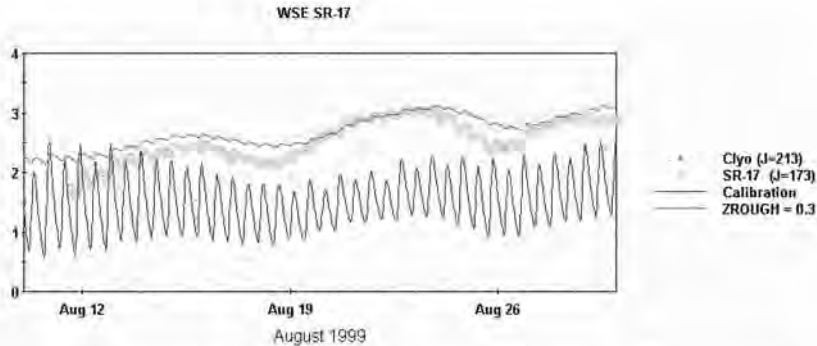


Figure 8 – Water Level at SR-17 with added marsh areas and added roughness on the Savannah River compared to May 2005 calibration

COMMENT 6: [C & A] Global versus source-specific BOD decay rates

a. Sensitivity of calibration

b. Sensitivity on allocation scenarios (more for TMDL)

RESPONSE 6: Tetra Tech has preliminarily setup two runs. The first run was a grouping in WASP according to the LTBOD results (decay rates). We used the WASP7 option that allows with three BOD classes and put the dischargers in the following categories:

- K = 0.02 per day (IP, Wilshire)
- K = 0.05 per day (Marshes, Fort James, Smurfit, President Street)
- K = 0.07 per day (Hardeeville, Garden City, Travis Field, Upstream, and Ocean)

The second run was done to split a large discharger such as the IP paper mill into a labile (fast reacting) and refractory (slow reacting) load category. CBOD decay rates were reassigned in following order:

- K = 0.06 per day (Marshes, Upstream and Ocean, all point sources except IP)
- K = 0.2 per day (IP 15% of discharge) = labile load
- K = 0.02 per day (IP 85% of discharge) = refractory load

Results of both scenarios showed no change in the calibration of the time series plots and minor changes in the calibration statistics. For demonstration purposes, the second run is shown below. Figures 9 through 11 show the same results as the May 2005 report calibration. In summary, the single rate approach will be used for deepening impacts. EPA will address the use and sensitivity of multiple BOD decay rates in the TMDL allocation scenarios. Conclusions of these runs can be summarized by salinity is still the dominating factor for DO deficit (Stations FR06 and FR22).

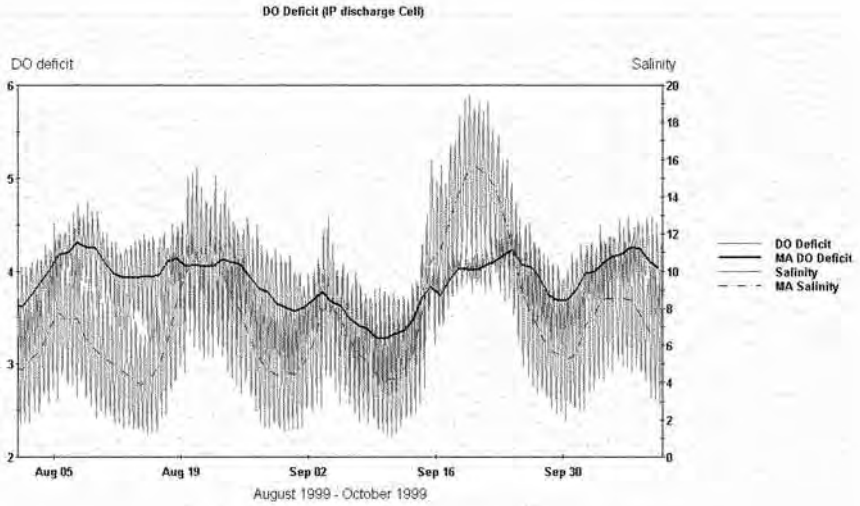


Figure 9 – DO deficit versus salinity at IP discharge (MA = Moving Average)

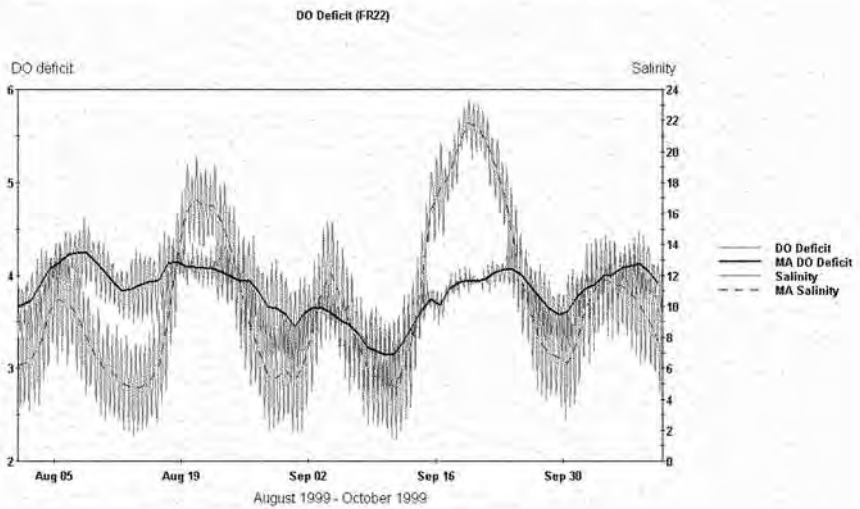


Figure 10 – DO deficit versus salinity at FR-22, downstream of IP Discharge (MA = Moving Average)

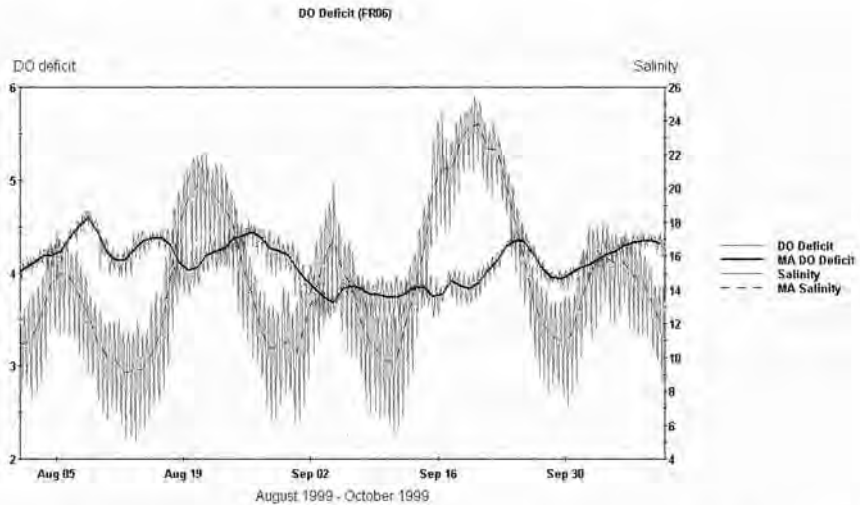


Figure 11 – DO deficit versus salinity at FR-06, downstream of IP discharge near Talmadge Bridge (MA = Moving Average)

COMMENT 7: [A] Check all point sources and heat loads, especially Plant MacIntosh (Harbor Committee will verify).

RESPONSE 7: We have not been able to verify the heat loads from MACTEC to date. From the previous comments, it appears that the flow used for Plan MacIntosh is lower than it should be. If the flows are adjusted higher, the delta temperature would be reduced to maintain their current heat load. The heat load table will be added to the report. Tetra Tech will contact Bob Scanlon and the Harbor Committee to verify.

COMMENT 8: [none] BOD loads from Corps' confined dredged sediment placement sites in SC and potential impacts on dissolved oxygen (future TMDL issue)

RESPONSE 8: No response needed at this time, may be included in the future as a TMDL issue. The clarification of the issue is presented in DHEC's June 2005 letter on the model review. The USACE will also collect data in these areas in the future.

COMMENT 9: [A] Grid convergence test:

- Show results of the TMDL grid with the same depth;
- Show results on TMDL grid, enhanced grid, and convergence grid on the same plots;
- Show comparisons on the Middle and Little Back Rivers;
- Perform moving average of results to reduce tidal noise; and
- Quantification of grid convergence test results.

RESPONSE: In the May 2005 report, Figure A-2 shows bottom salinity at Houlihan Bridge, while Figure A-3 shows the surface salinity for comparison of Enhanced Grid and Convergence Grid results. The "slightly greater stratification" phrase should be modified to indicate that slightly less salinity (difference is more apparent at surface) is observed in the Convergence

Grid results. Quantification of the convergence grid test results has been performed and is presented in the following table (Table 2). Model spin up (15 days) has been excluded from these statistics.

Table 2 – Quantification of the Convergence Grid Test Results

Site	Layer	Enhanced Grid Average Salinity (ppt)	Convergence Grid Average Salinity (ppt)	Average Difference (ppt)	Average Percent Difference
FR-09	Bottom	27.27	26.83	-0.43	-1.6%
FR-09	Surface	6.78	5.69	-1.09	-16.2%
SR-17	Bottom	0.005	0.006	0.001	21.9%

A plot of the daily average salinity difference and percent difference at FR-09 Bottom shows no consistent trend of difference (no divergence with time), shown in Figure 12 and the minor difference in system response for each grid may depend more on hydrologic or tidal conditions.

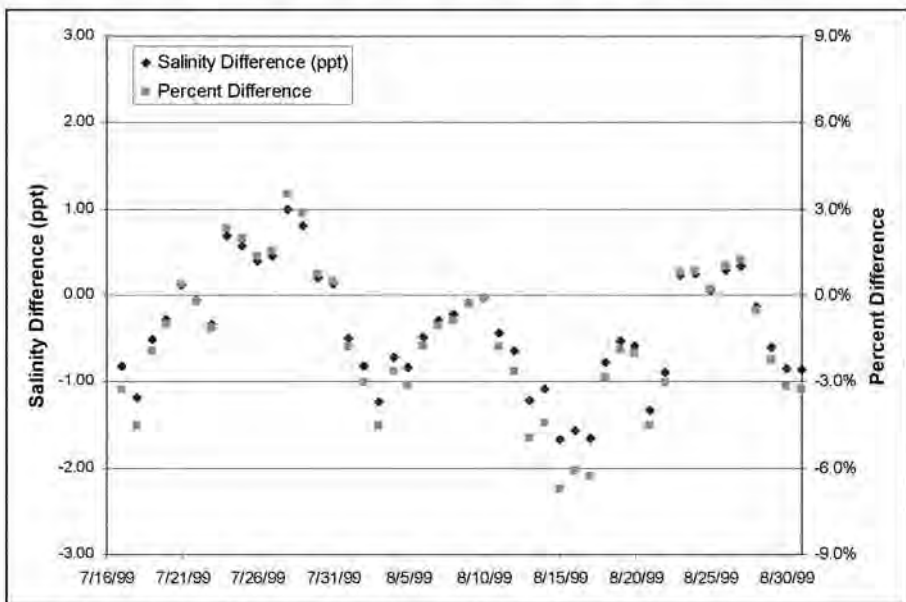


Figure 12 – Salinity and Percent Difference of Grid Convergence Results

The TMDL grid with equal bathymetry should not be compared because the surface area of the grid does not exactly match the enhanced or the convergence grid. The convergence grid is useful because the grid cells can be collapsed back to regenerate the enhanced grid. This could not be done with the TMDL grid.

COMMENT 10: [B & C] Delay in EFDC model salinity results at US F&W Dock comparisons of model versus data

RESPONSE 10: The model review group observed that the EFDC model shows a delay of salinity attenuation after high intrusion events in the Little Back River in the vicinity of the F&W Dock (USGS 021989791). Preliminary comments concerning the February 2005 draft EFDC model calibration described how the draft model completely flushed in the Little Back River (salinity dropped to zero in every tide cycle). The implementation of marshes in the final EFDC model calibration results in greater salinity retention in general. Attempts were made to modify the marsh parameters and dimensions to reduce the retention of salinity more within the range of measured data, however, no improvements from the draft calibration have been observed concerning this issue. Figure 13 below shows salinity at F&W Dock in the draft May 2005 calibration (without marshes) and in the final May 2005 calibration with marsh salinity retention.

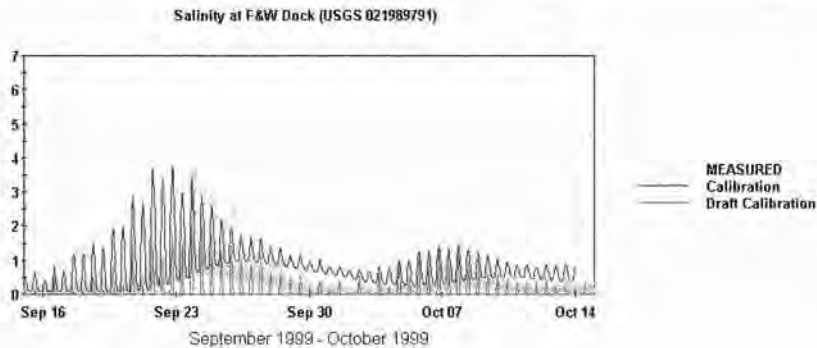


Figure 13 – Salinity and US F&W Dock with and without marshes

COMMENT 11: [A] Clearer description of 1999 versus 2002 bathymetry and why the 2002 bathymetry data is representative of 1997 through 2003 conditions in the harbor

RESPONSE 11: The 2002 and 1999 datasets were compared by analyzing cross-sections between the two surveys at many locations. Although there were some differences in alignment of the cross-sections, there was not a difference between the two surveys. Also, the survey data are grouped and averaged according to the model grid cell, and there was not a difference between 1999 and 2002 once this averaging occurred. Since dredging is a continuous operation in the navigation channel from year to year, the goal was to have a bathymetry that represents the current channel configuration, or depth, since the last deepening in 1994. It was determined that the 1999 and 2002 annual surveys are interchangeable in the model grid and best represent the existing (calibration) conditions. This text in the report has been modified.

COMMENT 12: UA/SA Analysis: The group concluded that the inability to run the models over a 7-year duration was the result of synthetic data that was developed to fill in a data gap around December 2000. The group concluded that the inability of the model to run over the entire 7-year period of data does not reflect on the structure of the model or its performance, and should not be a consideration of the model's usefulness for its intended purposes of predicting impacts of the Savannah Harbor Expansion Project, developing a dissolved oxygen TMDL, or permitting point source discharges.

RESPONSE 12: Tetra Tech agrees the 7-year run is important but in no way reflects on the

stability of the model. In Section 11 of the report, Tetra Tech comments on the results of the Uncertainty Analysis. Tetra Tech performed stability and mass balance tests with the model. The model was crashing during mid-December because there was not enough water in the Little Back River during this event. The high tide on Dec 17, 2000 was only 4 feet (compared to usual 6 to 8 feet) and the low tide on Dec 19, 2000 was -2 feet (compared to usual 0 to -1 feet). See Figure 14 below for a plot of the same time period at the St. Simons Island NOAA tide gage. This proves the event was a real phenomenon and later USGS reported that the Fort Pulaski data during this time period have been checked and are real data, not synthetic data as previously discussed. The TMDL grid ran through this period because the Back and Little Back Rivers were deeper (Tetra Tech updated the bathymetry based on the 2004 USGS survey data). Therefore, Tetra Tech believes it is not a stability issue, but rather a reality issue. The model will not run when the river bed is dry, and it is believed that parts of the upper system were very shallow (or dry) during this time period.

It is evident that sections of the Back and Little Back Rivers go dry during extremely low flows and low tide range (as documented in Dec 2000). Tetra Tech has since modified the PSER.inp (time series water level boundary file) by adjusting 10 data points out of 245,280 (0.004%), which was only 5 hours out of a 7-year record, and the model now runs for 7 years without going dry. Since December 2000 is not a critical period for the modeling scenarios, we felt justified altering the water level boundary for these limited data points. Figure 15 shows the altered water level boundary file for this time period.

In summary, the data during December 2000 proved to be valid and a real phenomenon occurred during this time period (some kind of offshore wind or pressure system). Since the 7-year model run became a critical issue among the Stakeholder Evaluation Group (SEG), Tetra Tech modified the water level boundary file to receive a continuous 7-year model run.

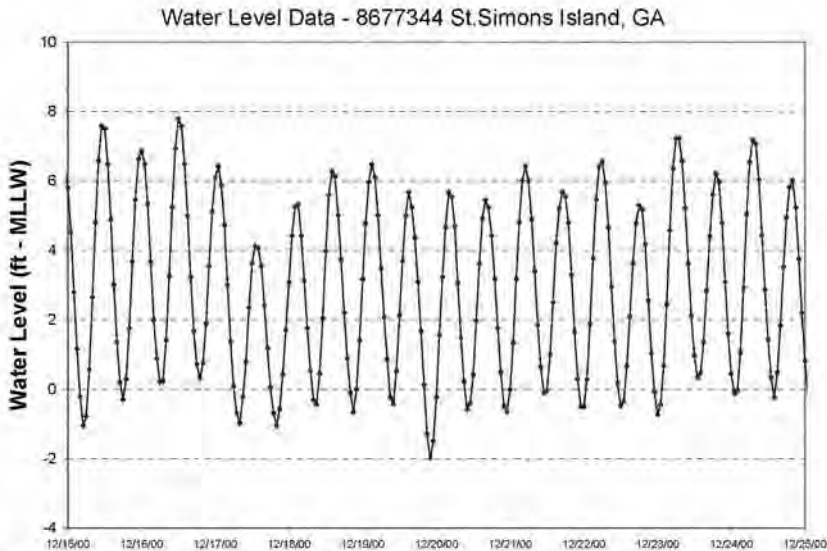


Figure 14 – Water level data measured at St Simons Island NOAA gage

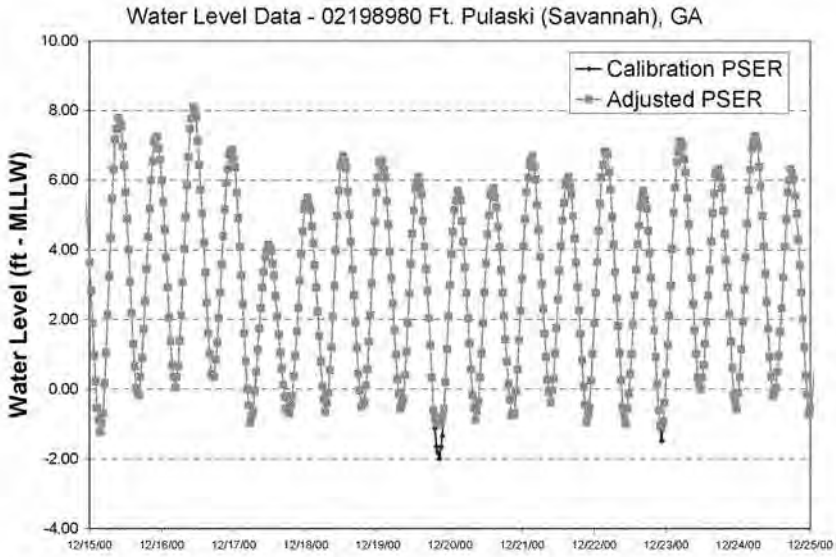


Figure 15 – Modified water level data for model boundary

Hydrodynamic and Water Quality Model Review Meeting
26 October 2005

Attendees, in person:

Will Anderson, Tetra Tech
Yuri Plis, Tetra Tech
Steven Davie, Tetra Tech
Bill Bailey, CoE-SAM
Jim Greenfield, EPA
Roy Burke, GA EPD
Paul Lamarre, GA EPD
Paul Conrads, USGS-SC
Alan Garrett, CoE-SAV
Joe Hoke, CoE-SAW
Larry Keegan, Lockwood-Green
Wade Cantrell, SC-DHEC
Kaiser Edmond, CoE-SAD
Susan Rees, CoE-SAM

Attendees, by telephone conference:

Ed Eudaly, USF&WS
Hope Moorer, GPA
Sung Chan Kim, CoE-ERDC

1. The meeting began with a review of the Tetra Tech responses to Dr. Kim's ITR comments. Dr. Kim has a slight concern with the .02 roughness coefficient used, but he says Tetra Tech's explanation is reasonable. He has also previously discussed the issue with Tetra Tech's John Hamrick, the author of the EFDC model. Dr. Kim accepts all of the Tetra Tech responses to his comments. After Tetra Tech corrects a few typos in the ITR document, Dr. Kim will provide a signed copy of the ITR response form indicating his concurrence.
2. Paul Conrads provided an update on the status of QA/QC of the ATM 1999 data set. ATM had originally done QA/QC of the data after they collected it. Jim Greenfield of the review committee had asked Paul to redo this activity so that data at the most critical stations would be QA/QC'd to the same standards and guidelines as the current USGS standards. This was begun during this past summer – three gages have been completed. The gages done first were the ones considered to have the most anomalies in the data. The process corrects for loss of calibration (or drift) to instruments as they are in place over periods of time, using the calibrated data at the time of servicing the gage to adjust the recorded data. What has been completed so far has resulted in changes (5 to 60% in some cases) to the recorded data plots. The outcome is slightly better agreement with the model calibration simulations. There are still 7 gages remaining to complete. This is not the highest priority project at the USGS – they are currently placing their greatest effort towards completing their annual report in a timely manner. This will not affect the uncertainty analysis, because the uncertainty analysis was performed on the seven years of USGS data, not

the 1999 ATM data. The consensus was that this should not hold up the alternatives analysis, but that the final calibration report should not be published until this activity is completed.

3. Tetra Tech responses to the written comments submitted by the review committee have been included in Tetra Tech Technical Memo #3. Based on discussion at the meeting, Technical Memo #3 will be revised and attached to these notes to document the resolution of those issues. To summarize the Tetra Tech actions to address comments and improve the calibrated model: They conducted sensitivity analyses on the boundary conditions and on the marshes, with no significant changes in salinity and dissolved oxygen in the harbor. They added additional marshes in the upper end of the harbor and increased friction on the river, which does improve the model's performance in the upper Savannah River area. Jim Greenfield agreed that these changes in the upper Savannah River, although not necessary for the harbor calibration, will improve the performance of the riverine part of the model. Therefore, the EFDC model will be adjusted based on this improvement. For the WASP water quality model, sensitivity analyses of decay rates and point sources showed no significant impact. However, redistributing the marsh loads into more than one vertical layer showed a direct improvement, thus the WASP model for the base condition was adjusted and improved. Tetra Tech has also modified the SOD in the Little and Back Rivers and just offshore of Fort Pulaski near Oyster Bed Island.
4. The two recommendations contained in the 17 October 2005 memo from Chuck Watson of Kinetic Analysis Corporation (KAC) were discussed.
 - a. The first recommendation was to perform a perturbation analysis similar to that performed on the TMDL version of the model to address concerns of asymmetric model error with respect to tide phase and the December 2000 7-year run stability issue. Tetra Tech felt that the sensitivity analyses that they have performed adequately addressed concerns over the asymmetric model error with respect to tide phase. The review committee reiterated that they did not have any problem with the minor adjustment that TT made to the tidal boundary condition to allow the 7-year simulation to run through the December 2000 time period. They had no stability issues with the model. Tetra Tech also believes that with the improved bathymetry in the model and implementing the recommendations from KAC on the TMDL model, the model already has the perturbations in the enhanced grid. The review group did have some questions about the KAC recommendation. I summarized those questions and forwarded them to KAC via e-mail on 27 October 2005. Chuck Watson replied the same day and those questions and answers are copied at the bottom of this memo for review by the committee members.
 - b. The second recommendation was to conduct a short-term data collection effort and then run the simulation models "real-time" for comparison of results to the collected data. The purpose of this is to improve confidence in the model. The review committee had no objection to obtaining more data, but the consensus was that for the data set to be meaningful, it would need to be collected by continuous recording gages rather than spot samples, and over a duration of at least 3 – 6 months. The reason for this

is with spot samples, collected by hand, you do not have simultaneous data points over the entire system. Also, any error cannot be readily determined whether it is a magnitude error or a phasing error. With contracting delays, data analysis, and report writing, the group estimated that a 3-6 month data collection effort would result in a 12-month period before a decision could be reached on the information obtained from another data collection effort. When considering the impact of this data collection effort on the overall progress of the study, the committee became less supportive. It was then pointed out that additional long-term gaging is already required to monitor and compare pre- and post-construction conditions. The USF&WS is a proponent of adaptive management of mitigation effort, whereby the results of mitigation projects are monitored and the project is adjusted to optimize results. The committee consensus was that the model is suitable for comparative analyses of impacts as it now stands. When data collection occurs in the future, it could be used to verify the mitigation plan modeling, in addition to the primary purpose of setting a baseline for the analysis of post-construction data. The Federal Agencies have already met and discussed long-term data collection efforts such as adding a dissolved oxygen instrument to some of the existing gages and continuous flow/velocity meters on the Front, Middle, and Little Back Rivers to better analyze the flow splits.

5. Tetra Tech presented a summary of their output post-processor. Tech Memo #4 was distributed which describes how the post-processor works and what the various output formats availability and appearance are. A copy of the software and sample input will be distributed to the review committee. Once they have an opportunity to familiarize themselves with the program, either an on-line or in-person training session will be set up.

BOARD:
Elizabeth M. Hagood
Chairman
Edwin H. Cooper, III
Vice Chairman
L. Michael Blackmon
Secretary



Promoting and protecting the health of the public and the environment.

BOARD:
Carl L. Brannell
Steven G. Kaiser
Phil C. Aughton, III
Coleman E. Backhouse, MD

March 10, 2006

Pete Oddi, P.E., PMP
U.S. Army Corps of Engineers
Savannah District
P.O. Box 889
Savannah, GA 31402-0889

Dear Mr. Oddi,

The Department received and reviewed the 7-year monitoring data and model output used to generate report Figures M-1 through M-4, which we requested by letter dated February 15, 2006, and we have completed our review of the report "Development of the Hydrodynamic and Water Quality Models for the Savannah Harbor Expansion Project—Final, January 30, 2006."

The January 30, 2006 report replaces the previous draft dated May 20, 2005. The Department provided comments on the previous draft by letter dated July 1, 2005. The purpose of the current review was to determine if the final report addresses previous comments and to give our position on whether or not the hydrodynamic and water quality models are acceptable tools to evaluate potential impacts of Savannah Harbor Expansion Project.

The final report addresses previous comments to varying degrees. In summary:

1. The EFDC hydrodynamic and salinity model continues to under-predict ebb flows on Back, Middle, and Little Back Rivers based on comparisons to discrete, short-term flow measurements. Improvement would likely require continuous, long-term flow data not currently available. The large amount of continuous water level and salinity data, and the overall agreement between this data and the model, appears to compensate for the limited flow data in demonstrating overall model performance. Thus, this issue is not considered significant for model calibration and for application to deepening impacts; however, application to mitigation scenarios that alter channel connections—and attempt to predict resulting changes to the flow regime and the effect on salinity—may require additional evaluation of model capability.
2. The EFDC model continues to under-predict salinity on Middle River; however, we agree with Tetra Tech that the model achieves a reasonable balance between


Middle River, Front River (where the model does well), and Little Back River (where the model tends to over-predict salinity). We also agree that the 7-year simulation results are evidence that the salinity model performs well over a wide range of conditions during 1997 through 2003. Notably, during the drought years 2000 through 2002 when salinity intrusion on Little Back River was greatest, model correlation to data increases and model percent error decreases as compared to the 1999 calibration and 1997 confirmation periods. Overall, the salinity model is performing well, and this issue is not considered significant.

3. The report documents the QA/QC screening of the dissolved oxygen (DO) data completed by USGS, and the WASP water quality model incorporates the new dataset. Results were mixed. In general, DO model statistics (Tables P-1 and P-2) did not improve; however, model-data comparisons are complicated by gaps in the DO data. Along the Front River, the model does not simulate the short-term fluctuations (< 24 hours) and associated instantaneous minima shown in the DO data (Appendix P). The model does a better job on average as indicated by comparisons of measured and simulated 50th percentile DO, and it does a reasonable job of representing the spatial trends along Front River (Figures 9-1 and 9-2). Although DO data on the side channels are more limited, available data show the model over-predicts DO in these areas. Based on these characteristics, the model should do a reasonable job of predicting impacts in terms of relative change in DO. Impact evaluations involving predictions of absolute DO values would require consideration of, and accounting for, model bias.
4. The Corps has collected additional five-day BOD concentration data for confined disposal facility (CDF) discharges and provided the data along with estimates of BOD loading during the days sampling was performed. Estimated loads were relatively low for these days because effluent flows were relatively low; however, five-day BOD concentrations were relatively high (16 to 19 mg/L). Final impact analysis will require refined load estimates that take into account higher flow periods (including any increased flows expected to result from deepening and disposal activities) and the potential contribution of ammonia to the total oxygen demand.
5. We understand that development of the Model-to-Marsh (M2M) linkage and the Marsh Succession Model (MSM) continues. Ultimately, the plan is to use the M2M to connect the EFDC model to the MSM. We appreciate the Corps keeping us informed about these analyses. As indicated above, we believe the EFDC model is performing well; however, ultimately, it will need to be demonstrated that EFDC, M2M, and MSM together yield reliable predictions of wetland impacts.
6. We understand that adjustment of both the EFDC and WASP models continues. Impact analyses submitted to the Department for water quality certification for harbor deepening should be run on the final models.

Based on our review of the report and models, our position is the EFDC hydrodynamic and salinity model and the WASP water quality model are acceptable tools, subject to the comments above. As with any complex tool, issues may arise during application and interpretation. In this case, we would look forward to continued cooperation with the Corps and the other state and federal agencies involved with this project.

Thank you for the opportunity to participate in reviewing the modeling work. If we can be of any other assistance please contact me or, for modeling issues, please contact Wade Cantrell at (803) 898-3548.

Sincerely,

A handwritten signature in cursive script that reads "Alton C. Boozer".

Alton C. Boozer
Chief, Bureau of Water

ACB/wmc

From: [Pace Wilber](#)
To: [Bailey, William G SAMatSAS](#)
Cc: [smtp-Brownell, Prescott](#)
Subject: Re: Savannah Harbor Expansion - Hydrodynamic and Water Quality Models
Date: Sunday, May 14, 2006 12:11:07 PM

Hi Bill.

Many thanks for all your effort to help me catch up on Savannah. Pres has been taking some well-deserved time off lately, and I don't know if he responded to you. We will continue to follow USFWS' lead on the hydro and WQ modeling. Do you need a letter? If so, please let me know and I will send this week (I'm on travel Tuesday and Wednesday).

Thanks,
 Pace

Bailey, William G SAMatSAS wrote:

The USFWS recently sent us the attached letter (WORD document).

It was sent in response to a letter from the Corps dated 26 April (also attached – ADOBE, labeled "Document.pdf").

In the past you have relied on the USFWS for assessing the adequacy of the Hydrodynamic and Water Quality Models.

If you intend to continue to rely on the USFWS views for those two models, we'd appreciate an email stating so. That would allow us to say that all the agencies approve of the models' use for impact evaluation purposes.

Thanks,

BB

PLEASE NOTE NEW MAIL ADDRESS AND PHONE NUMBERS

Pace Wilber
 Atlantic Branch, Charleston (F/SER47)

Southeast Regional Office, NOAA Fisheries
PO Box 12559
Charleston, SC 29422-2559

843-953-7200
FAX 843-953-7205
pace.wilber@noaa.gov

<http://sero.nmfs.noaa.gov/dhc/habitat.htm>

From: Bailey, William G SAM@SAS
To: "Jim Greenfield (E-mail) (E-mail)"; "nconrads@usgs.gov"; "Wade Cantrell"; "Paul Lamare" (E-mail); "Keith Parsons@mail.dnr.state.ga.us"; "Kay Davy (kay.davy@noaa.gov)"; "Ed Fudaly@fws.gov"; "Kellie Moore@coastal.dnr.state.ga.us"; "Ted Bisterfeld (bisterfeld.ted@epa.gov)"; "Curtis Joyner (joynercm@dhc.sc.gov)"; "Priscilla Wendt"
Subject: Savannah Harbor Expansion Project - Interagency Water Quality Team -- EFDC/WASP Input & output files
Date: Friday, May 18, 2007 3:15:01 PM

For those of you who are interested in running the EFDC ands WASP models, we put the input and output files on our ftp site. Wade Cantrell had requested this. Both he and Paul Conrads have been successful in downloading the files.

BB

-----Original Message-----

From: Williams, Laura E (Beth) SAW@SAS
 Sent: Monday, May 07, 2007 7:34 AM
 To: Bailey, William G SAM@SAS
 Subject: Water Quality EFDC/WASP input & output files

Bill,

The water quality input and output EFDC/WASP files are posted on the ftp site. They should be available for download until the end of the month.

ftp://ftp.usace.army.mil/pub/sas/SHEP_Output/WQ/

Please let me know if you need any other files.

Thanks,
 Beth

Beth Williams, PE
 Hydraulic Engineer
 US Army Corps of Engineers

From: Bailey, William G SAM@SAS
To: "greenfield.jim@epa.gov"; "Paul A Conrads"; "Ed Fudalvi@fws.gov"; "Kay Davy"; "Wade Cantrell"; Priscilla Wendt; "Paul Lammere" (E-mail); Keith Parsons; kellee.moore@dnr.state.ga.us
Cc: Ted Bisterfeld (bisterfeld.ted@epa.gov); "Mueller, Heinz@epamail.epa.gov"; "Larry Turner"; "J. Christopher Beckham"; "Curtis Joyner (joynercm@dhac.sc.gov)"; "Bob Perry"; "Elizabeth Booth"; Jeff Larson; "Tim Barrett"; Tanner, Margaret; "Neal, Larry"; "Steven Davie"; Bradley, Kenneth P SAM; Garrett, Thomas A SAS; hmoorer@gaports.com
Subject: Savannah Harbor Expansion Project -- Review of D.O. Demonstration Project Report
Date: Wednesday, May 14, 2008 6:56:54 PM
Importance: High

On 31 January, Hope Moorer from GPA sent most of you an email stating that the MACTEC report on the D.O. Demonstration Project that GPA conducted last summer in Savannah Harbor was complete and available for review. Hope's message said the report could be found at the following website: <http://www.sav-harbor.com/Reox.html>. She has since provided copies of the original data to those of you who requested that information.

A concern has been expressed about the report and I would like the Interagency Water Quality Coordination Team to meet to start working through the issue. The concern is about how well the report supports its conclusions, but the issue goes to whether the proposed oxygen injection would be an effective method of increasing D.O. levels in the harbor and, thereby, be an effective mitigation technique for the harbor deepening project.

I would like to convene a meeting of the Water Quality Coordination Team so we could start the process of working toward a consensus on whether the proposed oxygen injection system would be a satisfactory mitigation technique for the harbor deepening project. At this point, I envision MACTEC being the primary presenter at this meeting, explaining what they saw during the demonstration period, their conclusions after reviewing the data, and how they explained their findings in their report. After the meeting, I would like each agency to review the report further and provide the Corps with your agency's position on the acceptability of oxygen injection as a D.O. mitigation technique for the harbor deepening project. We would likely request your agency's response after an additional 3-4 week review period.

At some point in the evaluation of this project, each agency will have to decide whether this mitigation technique is acceptable. Last summer some agencies expressed a reluctance to approve components of the overall mitigation plan without seeing the entire plan. We honored that position and worked to develop comprehensive mitigation plans without asking further for your agency's position on the acceptability of individual components. However, since a concern has been expressed about this mitigation technique, I am asking each agency to reach your decision on this issue at this time, rather than later this year when the Draft EIS is out for formal agency comment. Late last month the Corps provided you with what we see as the complete mitigation plan for each project depth, so you now have a picture of the complete mitigation package that the District intends to include in the Draft EIS.

I'd like to hold this meeting in Atlanta on 27 May. That location has worked well in the past for water quality folks. If no meeting rooms are available there, we can probably find a room somewhere else in that big city. I believe we found a 10:00 start to be workable.

Jim -- could you check on the availability of a room at the EPA building?

Please let me know if that date and time would be acceptable to you to meet to hear about MACTEC's report. I will be away from my desk quite a bit, so please email your response.

I would like to have this issue resolved prior to a public workshop the Corps intends to hold on the project in late June. At that workshop I intend to provide the public with the same information I provided the natural resource agencies on 28 April on what the Corps sees as the project impacts and our proposed mitigation plans.

Bill Bailey

CESAM-PD-E

7 Jun 2008

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 27 May meeting of the Interagency Water Quality
Coordination Team

L	Attendees:	
	GA DNR-EPD	Liz Booth
	SC DHEC	Wade Cantrell
		Larry Turner
		Chris Beckham
	SC DNR	Priscilla Wendt (by phone)
	COE	Bill Bailey
	EPA	Jim Greenfield (by phone)
		Ted Bisterfeld
		Heinz Mueller
	USFWS	Ed EuDaly (by phone)
	USGS	Paul Conrads
	Georgia Ports Authority	Hope Moorer
	MACTEC	Margaret Tanner
		Larry Neal
	Tetra Tech	Steve Davie

2. The meeting was held at the Corps' South Atlantic Division offices in Atlanta from roughly 1000 to 1400. The meeting was primarily an information meeting, but some recommendations were made. The primary issue was a review of the January 2008 report produced for GPA by MACTEC titled "Savannah Harbor ReOxygenation Demonstration Project Report". Paul Conrads had reviewed the report for the USFWS and had expressed concerns about its technical adequacy.

3. The following is a summary of the discussions and does not include all the information that was presented or all comments made during the discussion.

4. MACTEC reviewed the technical details of the demonstration project that GPA performed last summer of oxygen injection in Savannah Harbor. MACTEC had conducted the project and prepared the monitoring report. MACTEC also described the observations it made during the project about the technology and the effects it observed in the river. They went on to explain the findings that they had included in the report and their overall assessment of the demonstration project.

MACTEC agreed that their analysis of the monitoring data could have been more detailed. They agreed to examine the data further, with particular emphasis on the issues that Paul Conrads had raised. They would issue a supplemental report with their additional findings.

GPA also agreed to include use of the approved EFDC and WASP hydrodynamic and water quality models in this more detailed analysis to attempt to identify (1) how far the effects of the oxygen addition should have been observable, (2) what the D.O. levels would have been in the harbor had the oxygen not been added, and (3) whether the amount of oxygen that was added produced the level of improvement that the model would predict. The last of those three questions would address uncertainty in whether the oxygen addition produces the beneficial effects that the modeling predicts.

5. The Corps attempted to clarify the major issues associated with this report. It identified two major questions:

(1) Did the Demonstration Project alter the dissolved oxygen in the river? If the Demonstration Project found that the dissolved oxygen in the harbor was not altered and improved by the addition of oxygen, then the Corps would need to identify another technique to mitigate for expected adverse impacts to D.O. from a further harbor deepening.

(2) Did the Demonstration Project indicate that the oxygen transfer efficiency of the Speece cones should be revised in the final design to ensure the oxygen addition produces the beneficial effects that the modeling predicts? If the oxygen transfer efficiency observed during the Demonstration Project was substantially less than what was assumed by the designers, then additional oxygen would need to be added to produce the desired amount of beneficial effects.

No agency represented would disagree that the Demonstration Project beneficially altered the dissolved oxygen in the river. There was considerable uncertainty among the meeting attendees on the extent of that improvement. The agencies continue to believe that oxygen addition may be an effective method of mitigating for adverse impacts on D.O. from further deepening of the harbor. In light of that continued support for the mitigation technique, the Corps will continue to the addition of oxygen as mitigation as it writes the Draft EIS for the project.

The Corps will review the supplemental report issued by MACTEC and GPA to determine whether it should revise the oxygen transfer efficiency used in the final designs of the D.O. improvement systems.

// DRAFT //

William Bailey
Physical Scientist

From: Bailey, William G SAM@SAS
To: "greenfieldJim@epa.gov"; "Paul A Conrads"; "Ed_Eudaly@fws.gov"; "Kay Davy"; "Wade Cantrell"; "Priscilla Wendt"; "Paul Lamarre" (E-mail); "Keith Parsons"; "kellie.moore@dnr.state.ga.us"
Cc: "Ted Bisterfeld (bisterfeld.ted@epa.gov)"; "Mueller.Heinz@epamail.epa.gov"; "Larry Turner"; "J. Christopher Beckham"; "Curtis Joyner (joynercm@dhec.sc.gov)"; "M. Rheta Geddins"; "Rob Perry"; "Elizabeth Booth"; "Jeff Larson"; "Tim Barrett"; Bradley, Kenneth P SAM; Garrett, Thomas A SAS; "lrmoores@gaports.com"; larry.keegan@ch2m.com
Subject: Savannah Harbor Expansion Project - Interagency Water Quality Coordination Team -- Review of D.O. Demonstration Project Report
Date: Monday, June 30, 2008 5:43:44 PM
Attachments: Supplemental Report Proposal 062608.doc
 Modeling Scope of Work.doc

I've attached GPA's proposal for the additional evaluation of data obtained during last year's D.O. Demonstration Project. The proposal is comprised of two scopes of work.

Please review the two SOWs and let me know if you have any revisions to suggest so that the work can answer your questions. Provide any suggested revisions or comments that you may have by 10 AM Monday, 7 July.

Thank you.

Bill Bailey

CESAM-PD

30 Apr 2009

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 29 April meeting of the Interagency Water Quality
Coordination Team

1. **Attendees (in person):**

GA DNR-EPD	Liz Booth
	Jeff Larson
EPA	Jim Greenfield
	Ted Bisterfeld
	Heinz Mueller
COE	Bill Bailey
	Paul Bradley
Tetra Tech	Steve Davie

By Phone

SC DHEC	Wade Cantrell
	Larry Turner
SC DNR	Priscilla Wendt
NOAA Fisheries	Kay Davy
	Stephanie Bolden
	Pace Wilber
USFWS	Ed EuDaly
	Bill Wikoff
	Chuck Hayes
USGS	Paul Conrads
Georgia Ports Authority	Hope Moorer

2. The meeting was held at EPA Region 4 from roughly 1230 to 1530. The Corps called the meeting to discuss the way forward with the dissolved oxygen systems, after the natural resource agencies had a chance to review the Supplemental Reports on GPA's 2007 Savannah Harbor ReOxygenation Demonstration Project. This MFR is a summary of the discussions and does not include all the information that was presented or all comments made during the meeting.

3. As background, the natural resource agencies have repeatedly expressed concern about the ability of the oxygen systems to effectively add oxygen to the water and have it distribute throughout the harbor. These questions go directly to whether the proposed systems would be effective in mitigating the impacts of a deeper channel. The concerns include two factors: (1) how much oxygen is added to the river, and (2) whether that

additional oxygen distributes through the impacted areas of the harbor. The Corps called this meeting to discuss ways the project could reduce the agencies' uncertainty on these two issues, while moving forward with the project. The Corps began by asking questions about some of the comments the agencies had provided, to gain a better understanding of the specific concerns.

4. SC DHEC stated that their concerns with the near-field plume modeling are to ensure the systems that are being proposed function effectively. Modeling of the injection plume would identify whether the oxygen being injected is likely to be fully absorbed into the water column with the design that is being proposed.

The plume modeling would include site and design-specific factors such as river depth, velocities, salinity, D.O. concentration of the discharge, and diffuser size, etc. This modeling would identify the required spacing and size of any needed diffusers. EPA and GA DNR-EPD explained that this modeling was not a complex analysis and was technical similar to one that TetraTech had performed for GPA in evaluating the D.O. Demonstration Project.

SC DHEC requested this modeling be performed during the EIS process. They would need the information produced from that analysis to be comfortable with the likely effectiveness of the proposed designs. GA DNR-EPD and EPA stated that this modeling would also be needed for their review.

All agreed that oxygen toxicity is no longer an issue. The Demonstration Project had shown that the injected oxygen would quickly disperse and not occur in high concentrations for a large area.

5. The Corps asked EPA about the Oxygen Transfer Efficiency Verification Study that it had requested in its comments on the latest reports. EPA explained that the actual efficiency at which a system would add oxygen to the waters could not be known until the system was operational. Design analyses are beneficial, but since dissolved oxygen is so critical to the aquatic ecosystem of the harbor, the actual ability of the systems to add oxygen should be confirmed.

This study would consist of monitoring D.O. levels in the river when the systems are operating. The monitoring would include both D.O. levels and a dye (rhodamine) introduced with the injected oxygen. It would need to be conducted over two tide cycles and would primarily be a near-field analysis. The dye would also be traced as it moved through the harbor to secondarily provide a way to assess the distribution of the oxygen throughout the harbor system.

The monitoring results would be used in a modeling analysis to show the near-field mixing and distribution of the injected D.O., as well as the distribution of the dye and its implications on the movement of the added oxygen throughout the harbor.

The Corps would use the results of the Oxygen Transfer Efficiency Verification Study to determine how it would operate the overall D.O. improvement system (# cones per site and the amount of oxygen from each cone) to produce the level of mitigation required (pounds of oxygen determined to be needed by the water quality modeling).

6. In a related issue, EPA had questioned the transfer efficiency used in the design of the D.O. systems. The present design assumed 100% efficiency, but also had additional capacity built in due to the 5,000 lb/day size increments of the Speece cones. The Corps had reviewed the various designs (sites and depths) and found the additional capacity to range from 5 to 36 percent. EPA stated that Dr. Speece had mentioned a 10 percent loss in efficiency with the cone itself. The Demonstration Project had shown additional losses to occur when the oxygenated water is introduced to the river. Those losses would vary with site-specific design factors. EPA suggested we assume the overall system is 80 percent efficient in getting oxygen into the water and into the river. TetraTech stated that this efficiency is not a modeling issue and may not affect the design of an individual Speece cone system, but could be used to identify the number of cones needed. The Corps asked the other agencies if they agreed with the Corps proceeding with the 80 percent figure for design and costing. GA DNR-EPD, SC DHEC and NOAA Fisheries agreed. The USFWS deferred to the views of the water quality permitting agencies (SC DHEC and GA DNR-EPD). GA DNR-CRD deferred to GA DNR-EPD. SC DNR deferred to SC DHEC. The Corps will revise the designs (primarily the # of cones and resulting costs) to include the 80 percent efficiency value.

7. EPA asked when the D.O. systems would be constructed. The Corps said they would all be constructed sometime during the 3-year construction period, with some mitigation features being implemented each year with funds obtained that year. After some discussion, the Corps agreed to provide the agencies with a list of the various mitigation features that it is proposing. The agencies would review that list and provide any recommendations on the order in which they would like to see those features implemented.

8. EPA asked about performance guarantees for the D.O. systems. The issue is what assurance would the agencies have that the Corps would operate the D.O. systems if the District does not receive all the funds it needs in a given year. As a mitigation feature, the Corps would consider the D.O. systems to be a "General Navigation Feature", and thus considered eligible to receive any of the funds that Congress provides in a given year to operate and maintain the Savannah Harbor Navigation Project. The group agreed that the Record of Decision carries the most legal weight for operation of the project within its environmental approvals. The Corps agreed to work with EPA to develop specific language to include in the draft ROD to address this issue. The group agreed this is a legal issue and not a technical issue.

// DRAFT //

William Bailey
Physical Scientist

From: [Bailey, William G SAS](#)
To: ["Mueller, Heinz J."](#); ["Hoberg, Chris@epamail.epa.gov"](#); ["Ed Eudaly"](#); ["Bill Wilkoff"](#); ["Kay Davy"](#); ["CANTRRW@dhc.sc.gov"](#); ["TURNER, E@dhc.sc.gov"](#); ["Priscilla Wendi"](#); ["pconrads@usgs.gov"](#); ["Jeff_Larson@dnr.state.ga.us"](#); ["Elizabeth.Booth@dnr.state.ga.us"](#); ["Keith Parsons"](#); ["Paul Lammie" \(E-mail\)"](#); ["Dale Caldwell"](#)
Cc: ["Tim Barrett"](#); ["kelle_moores@dnr.state.ga.us"](#); ["Melville, William@epamail.epa.gov"](#); ["Gaoliang, Paul@epamail.epa.gov"](#); ["Jane Griess"](#); ["Chuck Hayes@fhws.gov"](#); ["David Bernhart"](#); ["M. Rheta Geddings"](#); ["beckhaic@dhc.sc.gov"](#); ["Bob Perry"](#); ["Pace Wilber"](#); ["Stephanie Bolden@nota.gov"](#); ["Bradley, Kenneth P SAM"](#); ["Okane, Jason D SAS"](#); ["McIntosh, Margaret \(Mackie\) SAS"](#); ["hmoorer@epa.gov"](#); ["David Steven"](#)
Subject: Savannah Harbor Expansion Project - Interagency Water Quality Coordination Team: DO Injection Design Report
Date: Wednesday, October 27, 2010 9:24:36 AM
Attachments: [SHEP Oxygen Injection Design Report \(with Appendices\).pdf](#)

Here is the revised/final Savannah Harbor Oxygen Injection Design Report. It addresses the new locations for the systems and the near field plume modeling for those designs.


We've include this information in the Draft EIS that we expect to release next month and we'll include the report as an appendix in the overall project documents.

Bill Bailey

Oxygen Injection Design Report

Savannah Harbor Expansion Project

Savannah, Georgia

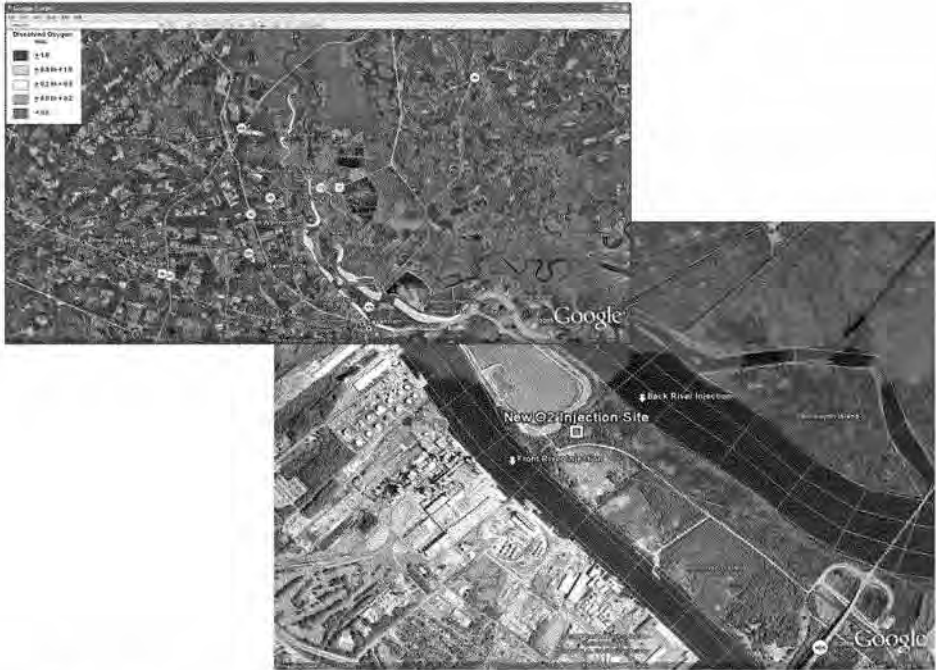

PREPARED BY:



Tetra Tech, Inc.
2110 Powers Ferry Rd. SE, Suite 202
Atlanta, Georgia 30339
Phone: (770) 850-0949

PREPARED FOR:

USACE Savannah District
100 West Oglethorpe Ave
Savannah, Georgia 31401
Contract No: W912-HN-05-D-0014
Work Order 0025

FINAL
October 15, 2010

TABLE OF CONTENTS

1.0	INTRODUCTION.....	3
2.0	TECHNICAL APPROACH.....	3
2.1	EFDC Application to the Savannah River Estuary.....	4
2.2	WASP Application to the Savannah River Estuary.....	7
2.3	An Approach to Evaluation of Deepening Impacts and Mitigation Measures.....	7
3.0	MITIGATION PLANS FOR SALINITY AND WETLANDS.....	10
3.1	Impact of alternative deepening and mitigation plans on D.O. regime.....	12
4.0	OXYGEN INJECTION TECHNOLOGY.....	13
5.0	INJECTION QUANTITIES AND LOCATIONS.....	16
5.1	Injection for Harbor Deepening Mitigation (IP site).....	16
5.2	Injection for Harbor Deepening Mitigation (IP and GP sites).....	16
6.0	NEAR-FIELD MODELING RESULTS.....	20
6.1	Plume Model.....	21
6.2	Near-Field Simulation Results.....	21
7.0	COST CONSIDERATIONS.....	25
8.0	CONCLUSIONS.....	26
9.0	REFERENCES.....	27
APPENDICES.....		28
APPENDIX A	Dissolved Oxygen Regime of Savannah Estuary: August 1997 (Average Flow), Alternative Deepening with Mitigation Plans 6A and 6B, No D.O. Injection – Tables and Figures	
APPENDIX B	Dissolved Oxygen Regime of Savannah Estuary: August 1997 (Average Flow), Alternative Deepening with Mitigation Plans 6A and 6B, D.O. Discharge with Mitigation Purposes– Tables and Figures	
APPENDIX C	Dissolved Oxygen Mitigation Results for Oxygen Improvement Systems Located Near International Paper and Georgia Pacific – Tables	
APPENDIX D	Savannah Enhanced Model (SHEP) Postprocessor	
APPENDIX E	ECO2 Quotation on Speece Cone on March 17, 2010	

List of Figures

Figure 2-1	Model Grid and Bathymetry	5
Figure 2-2	Model Grid and Bathymetry in the Upper Estuary	6
Figure 2-3	Zones' Delineation of Savannah Estuary Computational Grid	8
Figure 3-1	Mitigation Plan 6A (courtesy of the USACE Savannah District)	11
Figure 3-2	Mitigation Plan 6B (courtesy of the USACE Savannah District)	12
Figure 4-1	Speece Cone Being Installed in Newman Lake (from www.eco2tech.com)	15
Figure 4-2	Summer 2007 GPA Demonstration Project (MACTEC, 2008)	15
Figure 5-1	Location of Components of Dissolved Oxygen Injection System	19
Figure 5-2	Location at IP Hutchinson Island	19
Figure 6-1	Typical Output using Visual Plumes Model	20
Figure 6-2	Visual Plume Model Results for Front River at International Paper	23
Figure 6-3	Visual Plume Model Results for Back River at International Paper	23
Figure 6-4	Visual Plume Model Results for Savannah River at Georgia Pacific	24

List of Tables

Table 2-1	Grid Coordinates and Volumes of Delineating Zones	9
Table 3-1	Volume of the harbor's water that was mitigated by plans 6A and 6B	13
Table 5-1	Oxygen loads and mitigation results for IP facilities: 1BL criteria	16
Table 5-2	Oxygen loads and mitigation results for IP and GP facilities: 1BL criteria	17
Table 5-3	Oxygen loads and mitigation results for IP and GP facilities: 3BL criteria	17
Table 5-4	D.O. Saturation (%) in locations of GP and IP facilities	18
Table 6-1	Design parameters for each of the three locations	22
Table 7-1	Installation Cost Estimate of Speece Cone Land-Side Installation	25
Table 7-2	Maintenance Cost Estimate of Speece Cone Land-Side Installation	25
Table 8-1	Summary of Dissolved Oxygen Loads and Cost (MITIGATION)	26

1.0 INTRODUCTION

The United States Army Corps of Engineers (USACE), Savannah District is working with the Georgia Ports Authority (GPA) to evaluate the deepening of the navigation channel in Savannah Harbor. This effort is called the Savannah Harbor Expansion Project (SHEP). The project is intended to identify the impacts and mitigation strategies of deepening the harbor from its presently authorized 42-foot depth Mean Lower Low Water (MLLW), up to a depth of 48-foot MLLW.

Hydrodynamic and water quality models were developed and determined to be acceptable in March 2006 by the United States Environmental Protection Agency (USEPA), United States Fish and Wildlife Services (USFWS), Georgia Environmental Protection Division (GAEPD), and South Carolina Department of Health and Environmental Control (SCDHEC) to identify dissolved oxygen (D.O.) levels throughout Savannah Harbor. Studies have identified a dissolved oxygen injection system as being the most cost effective method to improve dissolved oxygen levels in the harbor (MACTEC 2005).

The SHEP is examining ways to mitigate for potential adverse effects on dissolved oxygen levels from proposed harbor deepening alternatives and will use oxygen injection systems for that mitigation. To meet those mitigation requirements, designs for an oxygen injection system were needed. This work effort uses the models to size and locate the system components and ensure the dissolved oxygen effectively mixes throughout the portions of the harbor that have the critical dissolved oxygen impacts.

The dissolved oxygen improvement designs are based on use of an off-stream (land-side) system to improve the dissolved oxygen of waters obtained from the harbor, and then reintroduce those oxygenated waters back into the harbor. The designs are based on the Speece cones to increase the oxygen levels.

The basic tasks included in this *Oxygen Injection Design Report* are as follows:

- Review siting of D.O. Injection Systems
- Optimize the D.O. discharge for mitigation purposes
- Accomplish near-field plume modeling for discharge sites
- Accomplish all necessary additional far-field model runs

2.0 TECHNICAL APPROACH

In developing the models for the Savannah River Estuary (Savannah Harbor), the Environmental Fluid Dynamics Code (EFDC) was selected for the hydrodynamic model. The Water Quality Analysis Simulation Program Version 7.0 (WASP7) was used for the water quality model development.

The EFDC model is part of the USEPA TMDL Modeling Toolbox due to its application in many TMDL-type projects. As such, the code has been peer reviewed and tested and has been freely distributed for public use. EFDC was developed by Dr. John Hamrick and is currently supported by Tetra Tech for USEPA Office of Research and Development (ORD), USEPA Region 4, and USEPA Headquarters. EFDC has proven to capture the complex hydrodynamics in Savannah Harbor and similar systems. The EFDC hydrodynamic and sediment transport model linked with the WASP water quality model provided the most appropriate combination of features necessary for this study. EFDC is a multifunctional, surface-water modeling system, which includes hydrodynamic, sediment-contaminant, and eutrophication components. The EFDC model is capable of 1, 2, and 3-D spatial resolution. The model employs a curvilinear-orthogonal horizontal grid and a sigma, or terrain following, vertical grid. The EFDC model's hydrodynamic component employs a semi-implicit, conservative finite volume-finite difference solution scheme for the hydrostatic primitive equations with either two or three-level time stepping (Hamrick 1992).

The EFDC hydrodynamic model can run independently of a water quality model. For this Savannah Harbor application the EFDC model simulates the hydrodynamic and constituent (salinity and temperature) transport and then writes a hydrodynamic linkage file for the water quality model WASP7 code. This model linkage, from EFDC hydrodynamics to WASP7 water quality, has been applied on many USEPA Region 4 projects in support of TMDLs and has been well tested (Wool 2003).

WASP7 is the new version of WASP with many upgrades to the user's interface and the model's capabilities. The major upgrades to WASP have been the addition of multiple BOD components, addition of sediment diagenesis routines, and addition of periphyton routines. WASP is an enhanced Windows version of the USEPA Water Quality Analysis Simulation Program (WASP), nonetheless, uses the same algorithms to solve water quality problems as those used in the DOS version. WASP is a dynamic compartment-modeling program for aquatic systems, including both the water column and the underlying benthos. The time-varying processes of advection, dispersion, point and diffuse mass loading, and boundary exchange are represented in the basic program.

2.1 EFDC Application to the Savannah River Estuary

The EFDC model was developed to run for seven years – from January 1, 1997 through December 31, 2003. The model grid, which includes 931 horizontal cells, extends upstream to Clyo, Georgia (~ 61 miles from Fort Pulaski) and downstream to the Atlantic Ocean (~17 miles offshore from Fort Pulaski). The model also includes marsh cells, to simulate the extensive intra-tidal marsh areas in the system, increasing the number of total cells to 947. The man-made connections affecting the system were included in the model. These included McCoy Cut, Rifle Cut, Drakie's Cut, New Cut as closed, and the sill of the Tide Gate.

Figure 2-1 shows the grid, while Figure 2-2 shows a closer view of the upper estuary. The Savannah Harbor EFDC model was calibrated with graphical time series comparisons (qualitative) and statistical calculations (quantitative). The statistical calculations included percentiles at 5% intervals. It included: water surface elevation, currents, flow, temperature, and salinity.

The calibration objectives for the hydrodynamic model were to appropriately represent the transport processes by propagating momentum and energy through the system based upon freshwater inflow from the Savannah River and tidal energy from the Atlantic Ocean. Since vertical stratification plays a major role in the water quality of the lower harbor area, it was imperative to capture the effect of tides and fresh water flows on salinity and temperature over the appropriate spatial and temporal scales. The primary objective was to simulate the salinity and temperature stratification events and to demonstrate that the duration and magnitude of the events were appropriately represented in the model. The calibration period was the summer of 1999. The confirmation period was the summer of 1997. Long-term United States Geological Survey (USGS) data was also used for confirmation. The two summer periods were both low-flow conditions with several spring/ncap tide events occurring throughout the period.

The model calibration and validation results are presented in the report "Development of the Hydrodynamic and Water Quality Models for the Savannah Harbor Expansion Project", January of 2006, prepared by Tetra Tech, Inc. for the USACE Savannah District.

Kinetic Analysis Corporation (KAC) performed a sensitivity/uncertainty analysis to quantify the sensitivity of the model simulations to uncertainty in values of model input data or calibration parameters. The results are presented in the January 2006 report as an appendix.

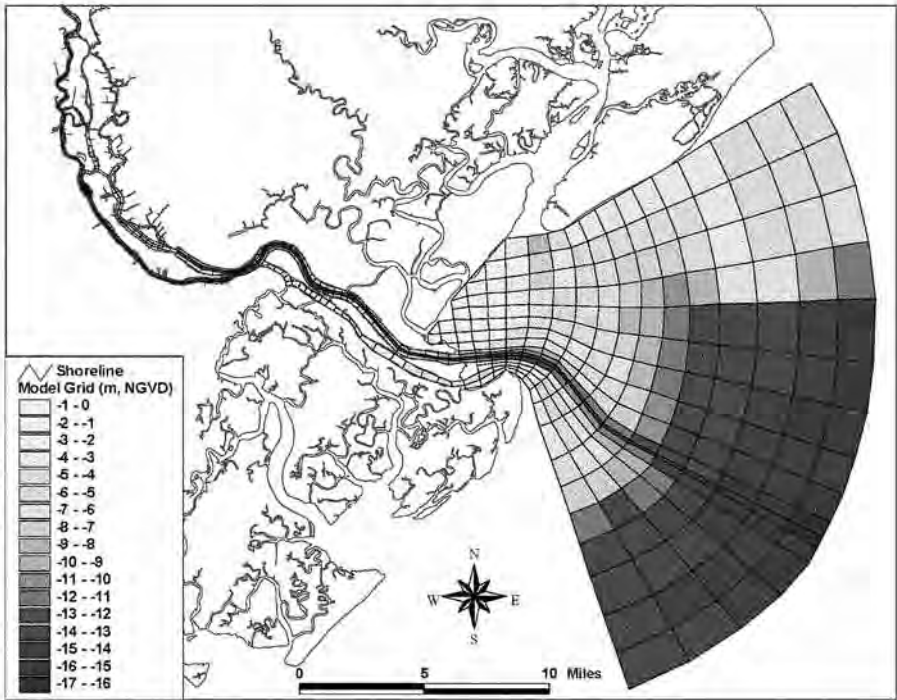


Figure 2-1 Model Grid and Bathymetry

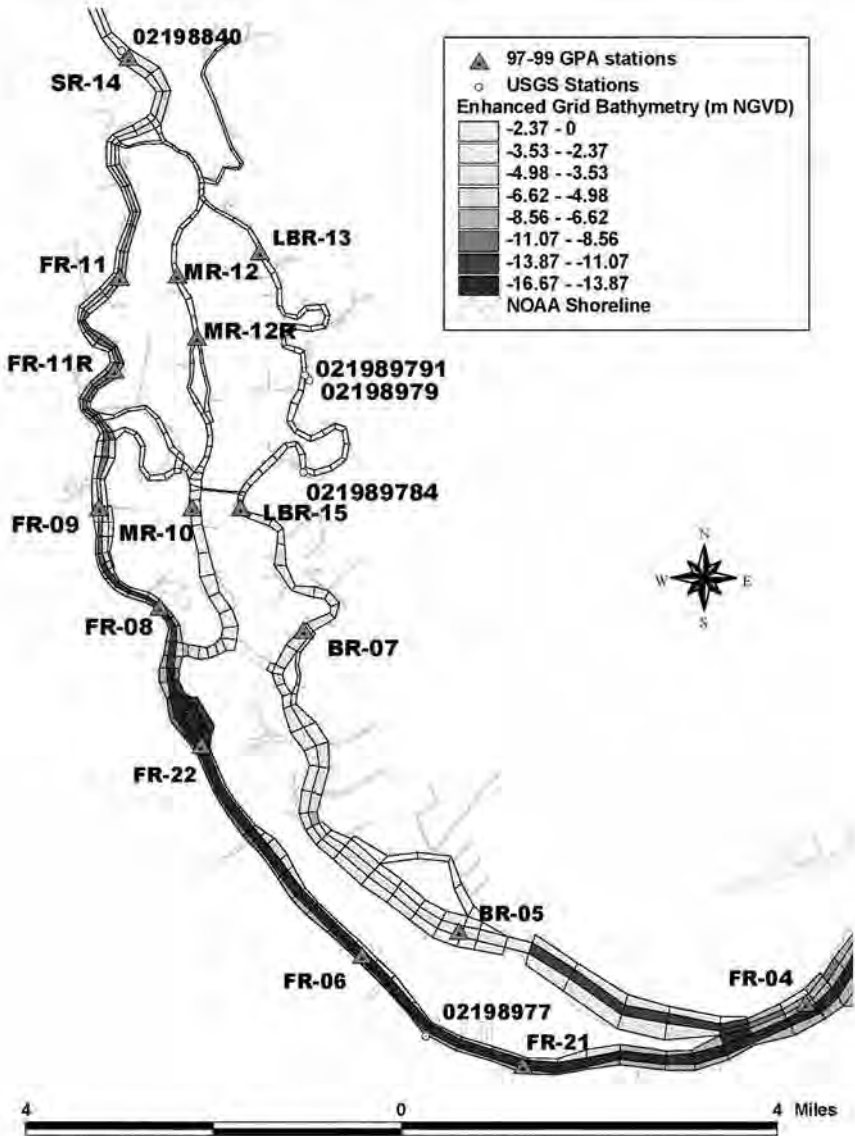


Figure 2-2 Model Grid and Bathymetry in the Upper Estuary

2.2 WASP Application to the Savannah River Estuary

The water quality model incorporated oxygen dynamics, including: reaeration, sediment oxygen demand (SOD), carbonaceous Biochemical Oxygen Demand (CBOD) and uptake, and Nitrogenous Biochemical Oxygen Demand (NBOD) and uptake. Since there is limited algal activity or primary production in the harbor, EPA Region 4 determined that nutrients were not a significant issue and they were not included in the water quality modeling scenarios.

The EFDC hydrodynamic model provides WASP with the flows between cells, the flows between cells and boundaries, cell volume, salinity, and temperature. This information is incorporated into the WASP model through the hydrodynamic linkage file.

The calibration was performed using the summer 1999 dataset. The WASP model was run from July 21, 1999 to October 13, 1999 with a 10-day spin up time. The measured values from the data collected during the 1999 summer survey were used for calibration of the WASP water quality model. Specifically, dissolved oxygen, BOD, and ammonia data were used for the calibration.

The time period for the WASP model confirmation was from July 5, 1997 through October 13, 1997. In addition to the 1999 summer data collection, the 1997 summer data collection represented the most recent dissolved oxygen and water chemistry data for the system.

Model calibration and validation results, as well as the sensitivity analysis for the water quality model, are also presented in the January 2006 report (Tetra Tech 2006a).

2.3 An Approach to Evaluation of Deepening Impacts and Mitigation Measures

The results of simulations that were performed under the project's Design of Dissolved Oxygen Improvement Systems in Savannah Harbor, Tasks I and II (Tetra Tech 2006b and 2006c) and their combination in Task III (Tetra Tech 2008) were used to develop the methodology to determine mitigation. This current work examines the impacts of the harbor deepening, Corps' mitigation plans, and the effects of oxygen injection system implementation based on average (August 1997) river flow conditions. The 2006 report identified average river flows as requiring more supplemental oxygen to meet harbor deepening mitigation requirements than do low river flow (August 1999) conditions (Tetra Tech 2006b and 2006c).

Figure 2-3 shows 27 spatial zones that delineate the estuary's simulated area. The zones cover the estuary area that can be affected by the harbor deepening. There are 11 zones for Front River (FR), 6 zones for Middle River (MR), 3 zones for Back River (BR), 3 zones for Little Back River (LBR), 2 zones for South Channel (SH), 1 zone for Steamboat River (StbR), and 1 zone for Savannah River (SR). The grid coordinates (I, J) zone boundaries are presented in Table 2-1.

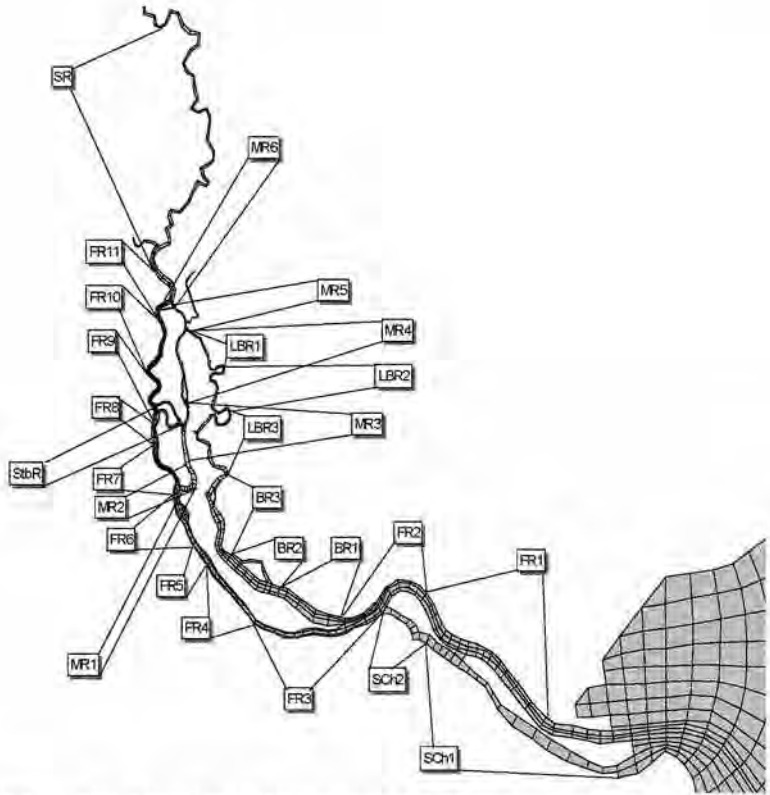


Figure 2-3 Zones' Delineation of Savannah Estuary Computational Grid

Table 2-1 Grid Coordinates and Volumes of Delineating Zones

Zone #	Zone Name	Grid Coordinates				Volume km3*1000	Relative Volume (%)
		I beg	J beg	I end	J end		
1	FR1	13	26	17	40	54.816	23.94
2	FR2	13	41	17	52	37.067	16.19
3	FR3	13	53	17	59	15.172	6.63
4	FR4	13	60	17	66	10.517	4.59
5	FR5	13	67	17	72	7.066	3.09
6	FR6	13	73	17	80	13.481	5.89
7	FR7	13	81	17	93	6.352	2.77
8	FR8	13	94	17	97	2.429	1.06
9	FR9	13	98	15	111	5.624	2.46
10	FR10	13	112	15	120	4.39	1.92
11	FR11	13	121	14	127	3.455	1.51
12	MR1	18	82	21	82	0.714	0.31
13	MR2	21	83	21	86	0.967	0.42
14	MR3	26	94	26	104	1.237	0.54
15	MR4	26	105	26	122	0.951	0.42
16	MR5	15	123	26	123	0.294	0.13
17	MR6	20	118	20	119	0.029	0.01
18	LBR1	27	123	38	123	0.401	0.18
19	LBR2	39	106	39	123	0.805	0.35
20	LBR3	30	86	30	109	2.766	1.21
21	BR1	30	59	34	63	8.16	3.56
22	BR2	30	64	34	70	4.988	2.18
23	BR3	30	71	32	85	5.572	2.43
24	SCh1	9	20	11	38	24.384	10.65
25	SCh2	7	45	12	46	4.761	2.08
26	SR	13	128	15	166	11.728	5.12
27	StbR	16	99	25	101	0.833	0.36

The model's postprocessor is described in Appendix D. The postprocessor outputs information for the following harbor's spatial objects:

- Critical Cell – cell with lowest D.O. concentrations during specified simulation period
- Critical Segment – an assemblage of cross section cells located at the critical cell's j-coordinate
- Zone – an assemblage of cells that are limited by specified horizontal and vertical boundaries

The postprocessor outputs allow evaluation of the impact and mitigation effects by:

- Comparing critical cells' D.O. concentrations for existing and project scenarios
- Comparing zones' volume-weighted D.O. concentrations for existing and project scenarios
- Calculating the percentage of water volume with the projected D.O. concentration that do not meet the existing bathymetry D.O. concentrations during the selected simulation periods

The basic criteria for assessing the success of mitigation measures was proposed by the USACE Savannah District based on results of numerous meetings and discussions with federal and local environmental agencies. The criteria require 97% of the estuary waters have D.O. concentrations equal or higher than the concentrations at existing (pre-project) conditions.

The selection of vertical boundaries of zones is the important factor of mitigation success calculations. The one boundary layer (1BL) and a mean of three boundary layers (3BL) criteria were selected and applied for the project. The 1BL is just the bottom layer and the 3BL is the three bottom layers of the model.

3.0 MITIGATION PLANS FOR SALINITY AND WETLANDS

The USACE Savannah District used the EFDC model to determine the appropriate measures to mitigate for salinity and wetland impacts. Based on analysis of the model output, the flow-altering mitigation plans that were found to be the most effective at reducing salinity impacts and protecting fresh water tidal marshes are Plan 6A for the 48-, 47-, 46-, and 45-foot channel depths and 6B for the 44-foot channel depth. Although the plans do not fully mitigate for all impacts to the estuary, they are expected to provide substantial benefits to the fresh water marsh ecosystems adjacent to the Back and Little Back Rivers.

Plan 6B is the proposed flow-altering mitigation plan for the 44-foot channel depth. The features of this plan include a diversion structure on Front River, closure of the lower (western) arm at McCoy Cut, closure of Rifle Cut, filling of the Sediment Basin, and removal of the tide gate abutments and piers. This plan provides potential for additional fresh water flows to enter the Back River System at McCoy Cut, without exiting through the lower (western) arm, and flow downstream through Middle, Back, and Little Back Rivers. It also has features that will limit saltwater intrusion to the Back River area through the sediment basin and Rifle Cut.

Plan 6A is the proposed mitigation plan for the 45-, 46-, 47-, and 48-foot channel depths. This plan includes all the features of Plan 6B and one additional feature, channel deepening on McCoy Cut, upper Middle, and Little Back Rivers. This additional feature in combination with the features in Plan 6B maximizes the potential for additional fresh water flows to enter the Back River System at McCoy Cut and flow downstream through Middle, Back, and Little Back Rivers.

Plan 6A includes the enlarged McCoy Cut only to the junction of Middle and Little Back Rivers. Plan 6B includes Plan 6A plus extending the enlargement 1,700 feet downstream of the junction of the two rivers. Figures 3-1 and 3-2 were provided by the USACE Savannah District and depict the different features for Plan 6A and 6B, respectively.

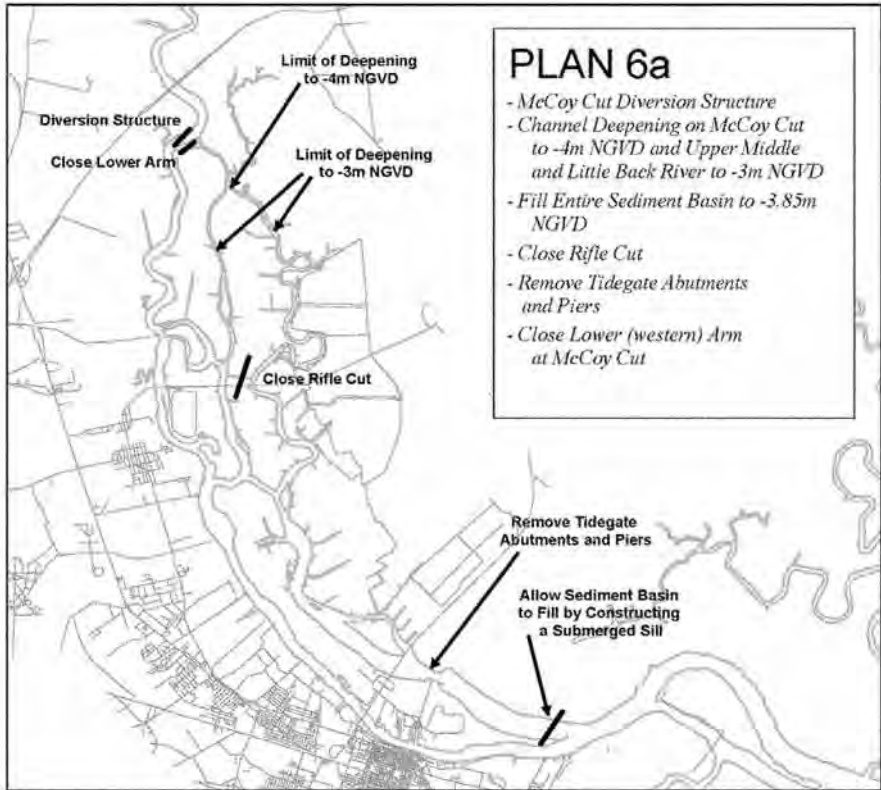


Figure 3-1 Mitigation Plan 6A (courtesy of the USACE Savannah District)

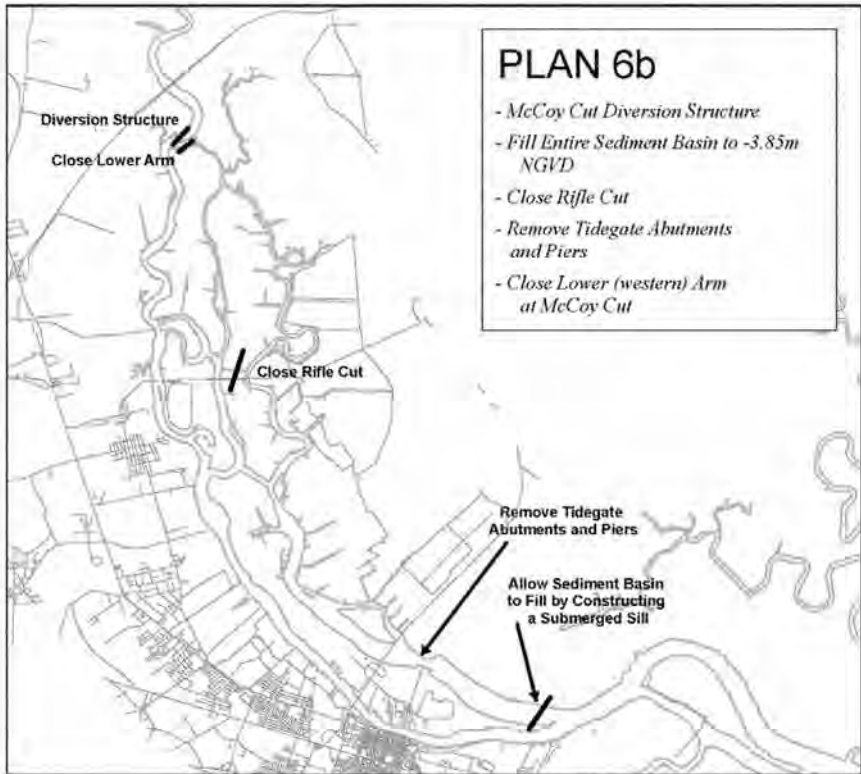


Figure 3-2 Mitigation Plan 6B (courtesy of the USACE Savannah District)

3.1 Impact of alternative deepening and mitigation plans on D.O. regime

Results of D.O. delta that were calculated by subtraction of existing bathymetry scenario outputs from the proposed mitigation plans alternative scenarios are presented in Table 3-1 and Appendix A.

Table 3-1 shows the percentage of water volumes where D.O. is not adversely affected by the proposed harbor deepening. The tables and figures presented in Appendix A allow identification of the harbor areas that are most affected by the deepening. These are zones F7, FR8, FR11, MR1, BR1, BR2, BR3, and LBR3 for mitigation plan 6A, and zones FR8, FR11, MR1, MR5, BR1, BR2, BR3, and LBR3 for mitigation plan 6B.

Such identification helps in selection of projected locations of components of the Oxygen Injection System.

Table 3-1 Volume of the harbor's water that was mitigated by plans 6A and 6B

Scenario Description	Injection kg/day	Volume mitigation (%) for the percentiles			
		5%	10%	25%	50%
Plan 6A					
6 ft deepening	0	68.1	73	68.8	43.8
Plan 6A					
5 ft deepening	0	71	74.2	69.5	58.5
Plan 6A					
4 ft deepening	0	71.2	73.4	72.9	10.4
Plan 6A					
3 ft deepening	0	73.3	75.4	75.2	69.7
Plan 6B					
2 ft deepening	0	65.1	68.7	63.1	68.4

4.0 OXYGEN INJECTION TECHNOLOGY

In order to inject oxygen into the system and to mitigate dissolved oxygen concentrations in the Savannah River Estuary that are below the standard, the technology developed by Dr. Richard Speece was used for design purposes. Dr. Speece invented the Speece Cone, a device originally used to add oxygen to the bottom of lakes to enhance downstream fisheries.

ECO2 SuperOxygenation systems (www.eco2tech.com) for water and wastewater treatment are designed and produced by Eco-Oxygen Technologies, LLC, an independent company headquartered in Indianapolis, Indiana.

The ECO2 SuperOxygenation method is a simple process based upon the scientific principle of Henry's Law. No chemicals and no moving parts other than standard municipal wastewater pumps are used. The result is a robust, reliable, economically competitive, and environmentally friendly technology.

This technology is appropriate when dissolved oxygen standards in the river are not attained, even if the industrial and municipal dischargers use the most advanced effluent treatments available. By superoxygenating directly to the river, water quality standards can be reached or maintained (Speece 2004).

This technology pulls a small sidestream of water from the river, superoxygenates it (using pure oxygen) and dilutes it back in the main river to satisfy dissolved oxygen deficiencies without treating the entire river. The sidestream is superoxygenated to achieve concentrations of 40 to 140 mg/L. Contrary to popular misconception, these high dissolved oxygen concentrations do not spontaneously effervesce, but can be kept in solution.

Cost comparisons with other traditional methods of oxygenation favor the use of this technology. Because pure oxygen and smaller sidestream flows used, less civil works and energy consumption are required than generally needed for aeration. Because the technology facilitates long residence times of gaseous oxygen in the oxygen transfer reactor, oxygen absorption efficiencies of 90 to 98% can be achieved.

The oxygen being dissolved can be supplied to the ECO 2 SuperOxygenation system in two ways:

1. Onsite oxygen generation either by Pulse Swing Absorption (PSA) or Vacuum Swing Absorption (VSA). Oxygen generation is a mature technology that has been used for decades and is widely used for wastewater treatment, medical facilities, and manufacturing. Oxygen generators operate by passing an air stream through a molecular sieve, which traps the nitrogen and discharges high purity oxygen for use. The nitrogen is then discharged into the atmosphere. The advantage to generating oxygen onsite is that oxygen is generated as it is being used, so there is no onsite bulk oxygen storage and it produces oxygen as a gas, not liquid. This eliminates issues centered on bulk liquid oxygen storage and truck delivery.
2. Bulk liquid oxygen (LOX). Bulk Liquid Oxygen is also widely used at wastewater treatment plants, manufacturing facilities and most noticeable medical hospitals. LOX systems are provided by a third party vendor that services, monitors, and delivers oxygen. LOX systems are comprised of a bulk oxygen storage tank and an evaporator. Liquid oxygen is trucked to the site and stored in the bulk oxygen tank. The liquid oxygen is piped through an evaporator that changes the liquid oxygen to gaseous oxygen.

High purity oxygen has been injected in water bodies in the past by various methods, such as pressurized sidestream, venturi aspirator, or turbine mixers, but inefficiently. The Downflow Bubble Contact Oxygenation equipment (Speece Cone) combines high oxygen absorption efficiency (>90%) with low unit energy consumption (<400 kwhr/ton D.O.), producing a superoxygenated discharge of >70 mg/L of D.O. The system can be placed out of the river channel without disrupting the water body, unlike aerators, or scouring the bottom.

Figure 4-1 shows a Speece Cone being installed at Newman Lake near Spokane, Washington. This cone was designed to add 3,300 pounds of oxygen per day (lbs/day) to a side stream of 13 million gallons per day (MGD) withdrawn from the hypolimnion of the lake.

Figure 4-2 shows a picture of the Georgia Ports Authority (GPA) demonstration project managed by MACTEC. The results of the study are in the "Savannah Harbor Reoxygenation Demonstration Project, Savannah, Georgia" (MACTEC 2008) and, in summary, improve the dissolved oxygen levels in the mid-channel, average low-tide by about 0.6 mg/L along the three-mile-long target segment.

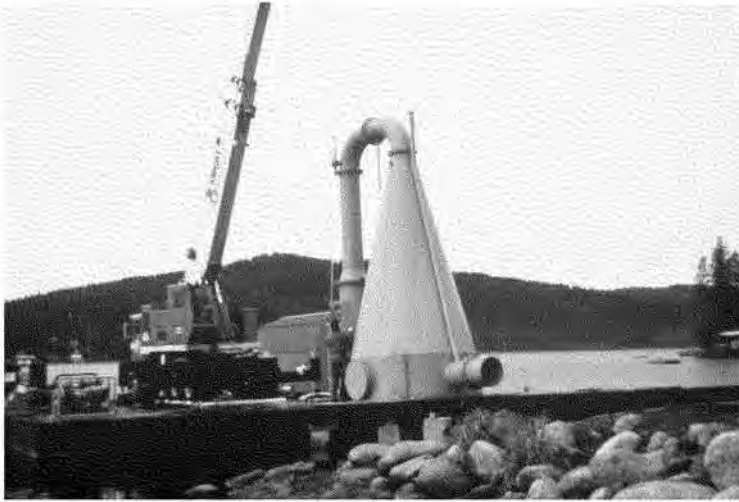


Figure 4-1 Speece Cone Being Installed in Newman Lake (from www.eco2tech.com)



Figure 4-2 Summer 2007 GPA Demonstration Project (MACTEC, 2008)

5.0 INJECTION QUANTITIES AND LOCATIONS

The SHEP model was used to determine the optimal quantities and locations of the oxygen injection facilities needed to mitigate for harbor deepening impact on dissolved oxygen. The problems with selection of optimal locations are complicated by limited availability of potential injection sites with easy transport and access.

5.1 Injection for Harbor Deepening Mitigation (IP site)

The USACE proposed the site on Hutchinson Island (near the International Paper (IP) aeration lagoon) as an oxygen injection facility for discharging oxygen into Front and Back Rivers. The results of D.O. mitigation for 6 ft deepening (Plan 6A) are presented in Table 5-1. The scenarios labeled m1 through m4 in Table 5-1 are different magnitudes of the 1BL (bottom layer only) criteria.

Table 5-1 Oxygen loads and mitigation results for IP facilities: 1BL criteria

Scenario	Cell Location	Coordinates	Injection	Sum	Mitigation (%) for the percentiles			
		(I, J)	(kg/day)	(kg/day)	5%	10%	25%	50%
m1	IP	FR (14,66)	30,000					
	IP	BR (31,70)	7,000	37,000	89.8	90.4	89.8	89.6
m2	IP	FR (14,66)	40,000					
	IP	BR (31,70)	17,000	57,000	91	91.7	90.9	91.7
m3	IP	FR (14,66)	50,000					
	IP	BR (31,70)	27,000	77,000	91.8	92.8	92.4	92.5
m4	IP	FR (14,66)	80,000					
	IP	BR (31,70)	60,000	140,000	93.3	93.9	93.7	93.6

The results of simulations under scenarios m1, m2, m3, and m4 demonstrate an inability of the Oxygen Injection Systems located only at the IP site to achieve the required 97% mitigation success criteria. So the IP Front and Back River injection sites alone do not mitigate all of harbor deepening impacts.

5.2 Injection for Harbor Deepening Mitigation (IP and GP sites)

The specifics of water circulation in Savannah River Estuary make oxygen discharge upstream of Savannah River very important. The Georgia Pacific (GP) site has high potential as an addition to the IP location for a combined Oxygen Injection System. Table 5-2 shows the results of D.O. mitigation for alternative deepening and 1BL criteria of success for locations near IP and GP.

Comparisons of results of Tables 5-1 and 5-2 demonstrate strong effect of upstream oxygen injection (GP) for FR and LBR zones. Such effect was not achievable by simply increasing of loads at the IP facility.

The Corps met with federal and state environmental agencies in February 2010 to discuss Tetra Tech's ongoing redesign of the oxygen injection systems. The agencies agreed that an upstream location appeared to be needed (in addition to the mid-harbor IP location) to meet the mitigation goals. The agencies agreed that the analysis could examine the effects in the lower half of the water column (bottom 3 layers of the model grid) rather than the bottom grid layer. D.O. generally decreases with channel depth, so analysis of conditions at the river bottom would represent worst-case conditions. Analysis of

the bottom half of the water column would be more representative (but still somewhat conservative) of average conditions throughout the water column.

The results of simulations and assessment of D.O. improvement on the basis of the 3 bottom layer (3BL) criteria are presented in Table 5-3.

Table 5-2 Oxygen loads and mitigation results for IP and GP facilities: 1BL criteria

Scenario Description	D.O. Discharge Location	Cell (I,J,K) Coordinates	Load (kg/day)	Sum (kg/day)	Volume mitigation (%) for the percentiles			
					5%	10%	25%	50%
Plan 6A	IP (FR)	14, 66, 6	10,000	27,000	98.4	98.6	98.4	97.1
6 ft deepening (GP+IP_5)	IP (BR)	31,70, 6	7,000					
	Georgia-Pacific	14, 171, 6	10,000	22,000	97.3	97.3	98.1	97.3
Plan 6A	IP (FR)	14, 66, 6	9,000					
5 ft deepening (5F-7)	IP (BR)	31,70, 6	3,000					
	Georgia-Pacific	14, 171, 6	10,000					
Plan 6A	IP (FR)	14, 66, 6	6,000	19,000	97.5	97.3	97.3	97.4
4 ft deepening (4F-3)	IP (BR)	31,70, 6	3,000					
	Georgia-Pacific	14, 171, 6	10,000	18,000	97.1	98.2	98.5	98.8
Plan 6A	IP (FR)	14, 66, 6	3,000					
3 ft deepening (3F-13)	IP (BR)	31,70, 6	3,000					
	Georgia-Pacific	14, 171, 6	12,000	19,000	97.2	97.4	97	97.8
Plan 6B	IP (FR)	14, 66, 6	6,000					
2 ft deepening (2B-1)	IP (BR)	31,70, 6	3,000					
	Georgia-Pacific	14, 171, 6	10,000					

Table 5-3 Oxygen loads and mitigation results for IP and GP facilities: 3BL criteria

Scenario Description	D.O. Discharge Location	Cell (I,J,K) Coordinates	Load (kg/day)	Sum (kg/day)	Volume mitigation (%) for the percentiles			
					5%	10%	25%	50%
Plan 6A	IP (FR)	14, 66, 6	7,000	18,000	97.9	97.8	98.1	97.3
6 ft deepening (GP+IP_13m)	IP (BR)	31,70, 6	2,000					
	Georgia-Pacific	14, 171, 6	9,000	16,000	98.2	97.5	97.9	97.3
Plan 6A	IP (FR)	14, 66, 6	3,000					
5 ft deepening (5F-5m)	IP (BR)	31,70, 6	2,000					
	Georgia-Pacific	14, 171, 6	11,000	14,000	97.6	97.2	97.4	97.7
Plan 6A	IP (FR)	14, 66, 6	2,000					
4 ft deepening (4F-3m)	IP (BR)	31,70, 6	2,000					
	Georgia-Pacific	14, 171, 6	10,000	13,000	98.1	97.4	97.7	98.5
Plan 6A	IP (FR)	14, 66, 6	1,000					
3 ft deepening (3F-3m)	IP (BR)	31,70, 6	2,000					
	Georgia-Pacific	14, 171, 6	10,000	15,000	97.2	97.3	97.6	97.8
Plan 6B	IP (FR)	14, 66, 6	1,000					
2 ft deepening (2B-6m)	IP (BR)	31,70, 6	4,000					
	Georgia-Pacific	14, 171, 6	10,000					

Table 5-3 shows the percent of the water volume where D.O. is at least as high as in the pre-project condition. The tables that show mitigation effect of Table 5-3 scenarios for every zone D.O. average and D.O. concentrations for critical cells are presented in Appendix B. The figures in Appendix B display 50th percentile of D.O. delta (Project minus Existing scenarios).

Appendix C contains tables that demonstrate mitigation success (required for 5th, 10th, 25th, and 50th percentiles) for surface, middle, and bottom layers.

Table 5-4 displays depths and statistics of oxygen saturation using oxygen injection facilities near IP and GP. This information is necessary for the design of oxygen injection in the harbor using Speece supersaturating cones.

Table 5-4 D.O. Saturation (%) in locations of GP and IP facilities

Scenario Description	D.O. Discharge Location	Cell (I,J,K) Coordinates	Depth (m)	D.O. Saturation (%)		
				10 %ile	50 %ile	90 %ile
Plan 6A	IP (FR)	14, 66, 6	16.92	53	56	60
6 ft deepening	IP (BR)	31,70, 6	3.33	30	38	49
(GP+IP_13m)	Georgia-Pacific	14, 171, 6	3.62	65	74	80
Plan 6A	IP (FR)	14, 66, 6	16.61	53	56	61
5 ft deepening	IP (BR)	31,70, 6	3.33	29	36	48
(5F-5m)	Georgia-Pacific	14, 171, 6	3.62	65	74	80
Plan 6A	IP (FR)	14, 66, 6	16.31	53	56	62
4 ft deepening	IP (BR)	31,70, 6	3.33	28	35	48
(4F-3m)	Georgia-Pacific	14, 171, 6	3.62	65	74	80
Plan 6A	IP (FR)	14, 66, 6	16	53	56	63
3 ft deepening	IP (BR)	31,70, 6	3.33	27	35	48
(3F-3m)	Georgia-Pacific	14, 171, 6	3.62	65	74	80
Plan 6B	IP (FR)	14, 66, 6	15.7	52	57	65
2 ft deepening	IP (BR)	31,70, 6	3.33	19	29	45
(2B-6m)	Georgia-Pacific	14, 171, 6	3.62	65	74	80

The location of the injection facilities for mitigation of deepening impacts are shown in Figure 5-1. Figure 5-2 shows a close-up view of the IP Hutchinson Island location with injection sites on the Front and Back Rivers.


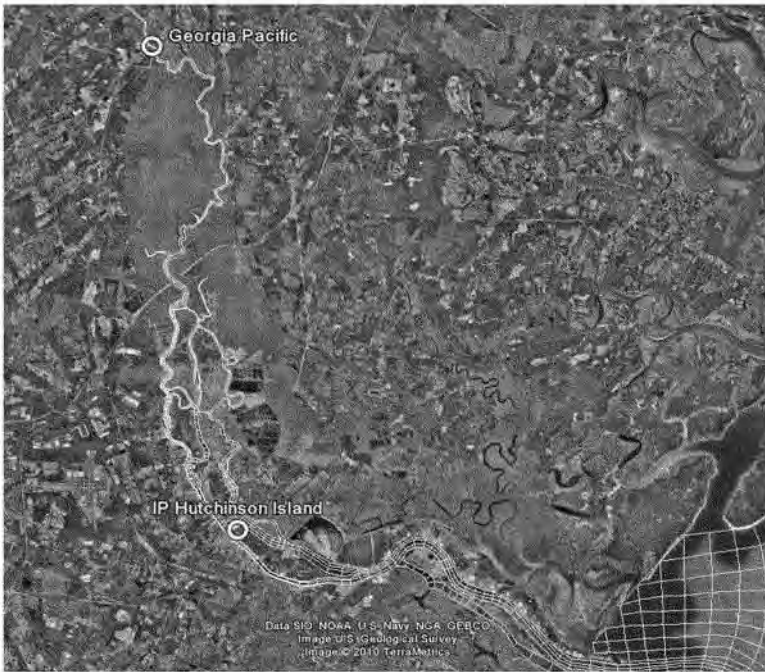


Figure 5-1 Location of Components of Dissolved Oxygen Injection System



Figure 5-2 Location at IP Hutchinson Island

The VP model is a Windows-based mixing zone modeling application designed to replace the DOS-based PLUMES program (Baumgartner et al. 1994). VP was developed by the USEPA and supports initial dilution models that simulate single and merging submerged plumes in arbitrarily stratified ambient flow. Predictions include dilution, rise and sink, diameter, and other plume variables. A more detailed description of the VP model is included in Appendix E of the 2007 injection modeling report (Tetra Tech 2009) and can be viewed at <http://www.epa.gov/ccampubl/swater/vplume/>. There are presently five recommended models in VP: DKHW, NRFIELD/FRFIELD, UM3, PDSW, and DOS PLUMES. For the present work the model UM3 was used. Figure 6-1 shows the output capabilities within the model after running scenarios (typical output).



6.1 Plume Model

UM3 is an acronym for the three-dimensional Updated Merge (UM) model for simulating single and multi-port submerged discharges. UM3 is a Lagrangian model that features the projected-area entrainment (PAE) hypothesis. This established hypothesis quantifies forced entrainment, the rate at which mass is incorporated into the plume in the presence of current. In UM3, it is assumed that the plume is in steady state; in the Lagrangian formulation this implies that successive elements follow the same trajectory (Baumgartner et al. 1994). The plume envelope remains invariant while elements moving through it change their shape and position with time. To make UM three-dimensional, the PAE forced entrainment hypothesis has been generalized to include an entrainment term corresponding to the third-dimension: a cross-current term. As a result, single-port plumes are simulated as truly three-dimensional entities. Merged plumes are simulated less rigorously by distributing the cross-current entrainment over all plumes.

The average dilution factor, S_a , used in the UM model is the reciprocal of the volume fraction of effluent, v_e , contained in the diluted plume. An equivalent way of expressing this term is the ratio of effluent volume plus volume of ambient dilution water, v_a , to the effluent volume, as in the following equation:

$$S_a = 1 / (v_e / (v_e + v_a)) = (v_e + v_a) / v_e$$

Thus, in the region immediately outside the discharge orifice the volumetric dilution factor is very nearly 1. In some discussions of this term in other works, the factor is considered to be the ratio of the volume of ambient dilution water, v_a , to the volume of effluent discharged, v_e . In this definition, the volumetric dilution factor approaches zero near the orifice. Above a value of 30, the difference in the two definitions is progressively less than 3 %, an inconsequential amount for most regulatory purposes.

6.2 Near-Field Simulation Results

Tetra Tech used the three-dimensional EFDC Savannah Harbor model (Tetra Tech 2006a) to develop the flow and velocity field under which the simulations were performed. The three-dimensional model was run for the 1997 summer conditions based on earlier results that showed more oxygen is needed the summer of 1997 versus summer of 1999 due to slightly higher levels of flows (Tetra Tech 2006b, 2006c, and 2008). The ambient river time series of velocity, salinity, and temperature were obtained from the EFDC simulation results.

Other input information required by the near field model included the following:

- Physical setup of the discharge
- Physical schematization of the channel cross section at the injection location.

For each of the three locations, a VP model was developed and results presented in this section. The ambient conditions were developed by the EFDC model at each location by simulating the 6-foot deepening with mitigation Plan 6A.

For the effluent conditions of the effluent, the following parameters were assigned:

- Flow = 12,500 gallons per minute (gpm) for each cone
- Salinity = ambient conditions (intake = discharge)
- Temperature = ambient conditions (intake = discharge)
- Dissolved Oxygen = 140 mg/L (based on 2007 Demonstration Project)
- Depth = time series based water surface elevation (tides)

The salinity and temperature conditions for the effluent were set to the ambient conditions because we assumed the intake and discharge depth were equal. In the 2007 Demonstration Project, the intake was 10 feet below the surface and the discharge was 30 feet below the surface. The modeling of the Demonstration Project showed that the mixing zone of the plume was short (~ 60 feet) and was not buoyant because of the short distance. For the purposes of this design report, we assumed the intake and discharge depths would be the same depth but separated by a horizontal distance of 600 feet.

Ambient conditions were based on the following parameters:

- Salinity = time series from EFDC model
- Temperature = time series from EFDC model
- Dissolved Oxygen = time series from EFDC model
- Velocity = time series from EFDC model

Pipe conditions were based on the following parameters:

- Diameter = 18 inches
- Angle = varies
- Port Depth = varies
- Number of Ports = one
- Port Spacing (intake to effluent) = minimum of 600 feet

Table 6-1 summarizes the details of each of the three effluent designs and Figures 6-2 through 6-4 show the vertical mixing zone results for all three locations.

Table 6-1 Design parameters for each of the three locations

Location	Effluent Flow (MGD)	Effluent DO (mg/L)	Port Elevation* (m)	Pipe Diameter (inches)	Horizontal Angle (degrees)	Vertical Angle (degrees)
Front River IP	108	140	2	18	0	20
Back River IP	72	140	1	18	0	0
Savannah River GP	108	140	1	18	0	0

* Port Elevation is the distance from the bottom of the channel to the effluent pipe, so it is measured from the bottom.

At all three locations, the dissolved oxygen concentrations are close to background within 20 meters of the effluent discharge.

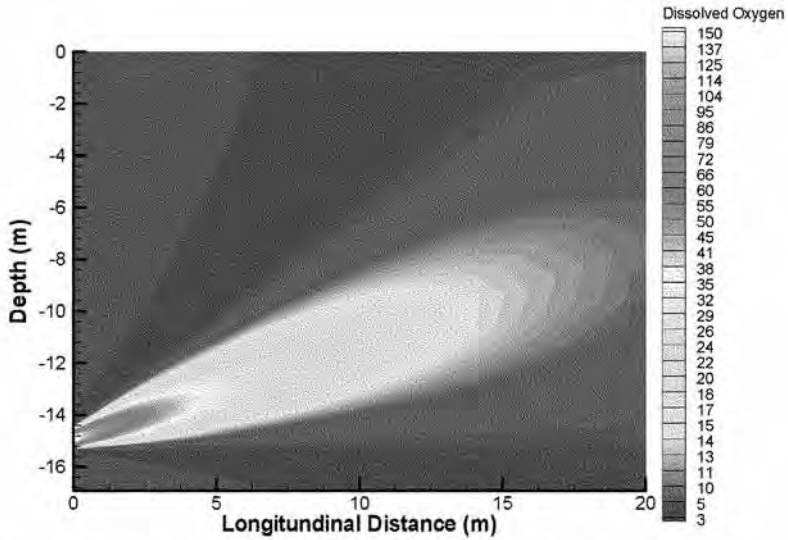


Figure 6-2 Visual Plume Model Results for Front River at International Paper

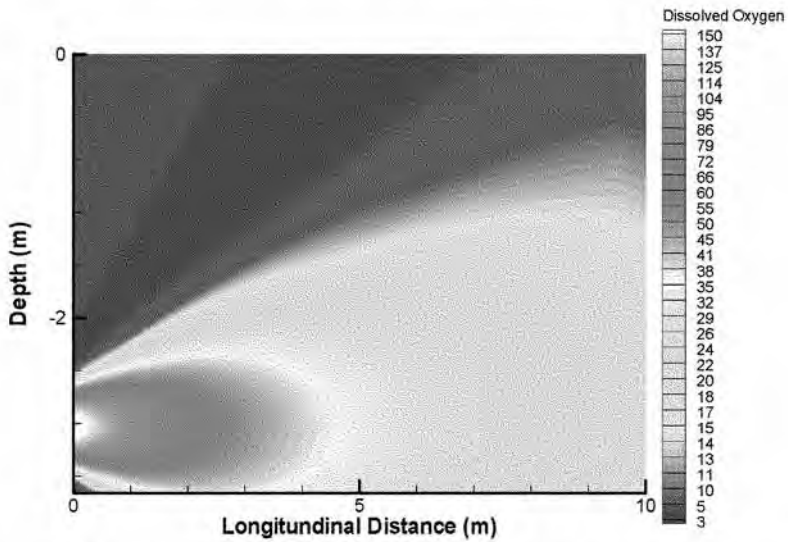


Figure 6-3 Visual Plume Model Results for Back River at International Paper

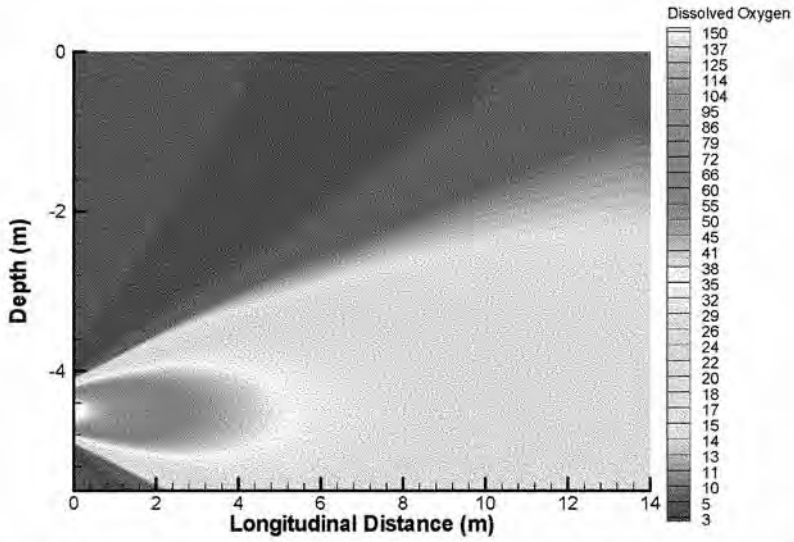


Figure 6-4 Visual Plume Model Results for Savannah River at Georgia Pacific

7.0 COST CONSIDERATIONS

This section describes cost considerations of installing and maintaining the oxygen injection systems. Capital costs include the purchasing, design, installing, and construction of the systems. Operating costs include the long-term maintenance of the systems. Tables 7-1 and 7-2 were developed to produce a cost estimate and summarize the installation and maintenance of one Speece Cone.

Table 7-1 Installation Cost Estimate of Speece Cone Land-Side Installation

Description of Work	Cost
One Speece Cone	\$748,474
Design with Plans & Specs of grading, road, pad, house, & piping	\$225,000
Construction (installation) of pumps, pipes, house, & cone	\$342,500
Oxygen generator & compressor	\$170,000
Subtotal	\$1,485,974
Contingency (10%)	\$148,597
TOTAL	\$1,634,571

Table 7-2 Maintenance Cost Estimate of Speece Cone Land-Side Installation

Description of Work	Cost
Operating and energy cost (includes electrical, O&M, license)	\$48,100
Maintenance of cone (labor of field technicians)	\$43,000
TOTAL	\$91,100

Therefore, the total cost of one cone is \$1,634,571 (including contingency) and \$91,100 per year in maintenance costs. Costs supplied by Eco2 (Eco2 2010) and previous MACTEC report (MACTEC 2008). See Appendix E for Eco2's quotation from March 17, 2010. These costs are based on generating oxygen on-site and supplying oxygen as needed. Therefore, no storage will be required.

Several assumptions were included and listed as the following:

- Above ground, land-side installation
- Oxygen generation on-site
- Speece Cone provides 5,000 lbs/day of oxygen
- Designed to consider 80% efficiency which is 4,000 lbs/day (regulators requested 80%)
- There would be a cost savings with more than one cone installed at a site (i.e., concrete pad, building, and piping may be overestimated)
- Design and construction considerations will be the elevation and soil conditions of the land, road and piping distances, and size of concrete pad
- Cones would run for approximately 180 days each year during the summer months

These costs do not include land procurement, utility installation, support building construction, or roadway construction as these are highly dependent on the sites selected. The support building would house equipment, control panels, oxygen generation equipment, and provide offseason storage of pumps, Speece Cone(s), and other equipment. Building costs will vary depending on the type (prefabricated, block, or concrete) and the finish required (some areas may have specific design requirements, i.e. brick, rock, etc.) for a specific location selected. These costs range from \$150,000 to \$300,000 or more. The below ground installation is more expensive because sheet piling and dewatering would be required during installation (MACTEC 2008).

8.0 CONCLUSIONS

The hydrodynamic and water quality models provided a tool to determine the amount of oxygen needed to mitigate for the deepening impacts on dissolved oxygen. With the expertise of Eco2, the designs were generated and summarized in Tables 8-1. The costs discussed in Section 7.0 were used to generate the cost at each of the three sites for each of the deepening scenarios. For each scenario, a mitigation plan (6A or 6B) was included.

Table 8-1 Summary of Dissolved Oxygen Loads and Cost (MITIGATION)

Scenario	Discharge Location	Load (kg/day)	Load (lb/day)	Cones	Cones (rounded)	Sum (kg/d)	Sum (lbs/d)	Cost at Each Site	Cost for Each Scenario
6 feet, Plan 6A	IP (FR)	7,000	15,432	3.88	4	18,000	39,683	\$ 6,538,284	\$ 16,345,710
	IP (BR)	2,000	4,409	1.10	1			\$ 1,634,571	
	Georgia-Pacific	9,000	19,842	4.96	5			\$ 8,172,855	
5 feet, Plan 6A	IP (FR)	3,000	6,614	1.65	2	16,000	35,274	\$ 3,269,142	\$ 14,711,139
	IP (BR)	2,000	4,409	1.10	1			\$ 1,634,571	
	Georgia-Pacific	11,000	24,251	6.06	6			\$ 9,807,426	
4 feet, Plan 6A	IP (FR)	2,000	4,409	1.10	1	14,000	30,865	\$ 1,634,571	\$ 13,076,568
	IP (BR)	2,000	4,409	1.10	1			\$ 1,634,571	
	Georgia-Pacific	10,000	22,046	5.51	6			\$ 9,807,426	
3 feet, Plan 6A	IP (FR)	1,000	2,205	0.55	1	13,000	28,660	\$ 1,634,571	\$ 13,076,568
	IP (BR)	2,000	4,409	1.10	1			\$ 1,634,571	
	Georgia-Pacific	10,000	22,046	5.51	6			\$ 9,807,426	
2 feet, Plan 6B	IP (FR)	1,000	2,205	0.55	1	15,000	33,089	\$ 1,634,571	\$ 14,711,139
	IP (BR)	4,000	8,818	2.20	2			\$ 3,269,142	
	Georgia-Pacific	10,000	22,046	5.51	6			\$ 9,807,426	

* Three bottom layer criteria (3BL) were used to generate final results.

The costs for operating the dissolved oxygen injection systems are based on their continued operation for a period of 180 days per year. The operational costs are assumed to be uniform throughout that 180-day period. The operating costs would be less if the systems were operated for a shorter duration.

9.0 REFERENCES

- Baumgartner, D.J., W.E. Frick, and P.J.W. Roberts: 1994. Dilution models for effluent discharges (Third Edition), March 22, 1994. U.S. EPA. Washington, D.C. EPA Report #600/R-94/086. 189 pp.
- Eco2, March 17, 2010 "Preliminary Design & Budget Estimate" provided by David Clidence (Eco2) to Steven Davie (Tetra Tech)
- Hamrick, J. M., 1992: A Three-Dimensional Environment Fluid Dynamics Computer Code: Theoretical and Computational aspects. The College of William and Mary, Virginia Institute of Marine Science, Special Report 317, 63 p.
- MACTEC, 2005. "Identification and Screening Level Evaluation of Measures to Improve Dissolved Oxygen in the Savannah River Estuary" Savannah Harbor Expansion Project and Savannah Harbor Ecosystem Restoration Study – Chatham County, Georgia submitted to USACE Savannah District.
- MACTEC, 2008: Savannah Harbor Reoxygenation Demonstration Project, Savannah, Georgia. Prepared for the Georgia Ports Authority, January 8, 2008.
- Speece, R.E., 2004: The Role Of Superoxygenation In Achieving TMDL Requirements, R. E. Speece, Ph.D., Centennial Professor Emeritus of Civil and Environmental Engineering Vanderbilt University, Nashville, TN and Board Member of ECO2. Indianapolis, Indiana.
- Tetra Tech, 2006a: Development of the Hydrodynamic and Water Quality Models for the Savannah Harbor Expansion Project. Atlanta, Georgia.
- Tetra Tech, 2006b: Design of Dissolved Oxygen Improvement Systems in Savannah Harbor: Task I Report. Atlanta, Georgia.
- Tetra Tech, 2006c: Design of Dissolved Oxygen Improvement Systems in Savannah Harbor: Task II Report. Atlanta, Georgia.
- Tetra Tech, 2008: Final Report. Design of Dissolved Oxygen Improvement Systems in Savannah Harbor. Atlanta, Georgia.
- Tetra Tech, 2009: Modeling of GPA's Oxygen Injection Demonstration Project Savannah Harbor, Georgia. Atlanta, Georgia.
- Wool, T.A., S.R. Davie, and H.R. Rodriguez, 2003: "Development of a Three Dimensional Hydrodynamic and Water Quality Model to Support the TMDL Decision Process for the Neuse River Estuary, North Carolina." American Society of Engineers Journal of Water Resources Planning and Management.

APPENDICES

APPENDIX A**DISSOLVED OXYGEN REGIME OF SAVANNAH ESTUARY:
AUGUST 1997 (AVERAGE FLOW), ALTERNATIVE DEEPENING WITH
MITIGATION PLANS 6A AND 6B, NO D.O. INJECTION****TABLES AND FIGURES**

Table A-1 Delta (Project – Existing) D.O. Percentiles for Critical Cells; Plan 6a, 6 ft deepening, No injections

Zone	Delta D.O. Percentile																	
	1%		5%		10%		25%		50%		75%		90%		95%		99	
	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	
FR1	0.02	0.5	0.02	0.5	0.01	0.2	0	0.0	-0.03	-0.7	-0.05	-1.1	-0.09	-1.9	-0.11	-2.3	-0.1	
FR2	-0.06	-1.6	0.26	6.9	0.4	10.4	0.44	10.9	0.4	9.5	0.38	8.6	0.28	6.1	0.4	8.5	0.23	
FR3	0.12	3.4	0.07	1.9	0.06	1.6	0.06	1.6	-0.03	-0.7	-0.13	-3.0	-0.25	-5.2	-0.11	-2.2	-0.24	
FR4	0.12	3.4	-0.1	-2.8	0.1	2.8	0.01	0.3	-0.02	-0.5	-0.16	-3.6	-0.39	-7.7	-0.31	-5.8	-0.03	
FR5	0.12	3.3	0.04	1.1	-0.04	-1.0	-0.06	-1.5	-0.16	-3.7	-0.61	-12.5	-0.75	-13.6	-0.79	-14.0	-0.75	
FR6	0.03	0.6	0.05	1.3	0	0.0	-0.06	-1.5	-0.08	-1.9	-0.45	-9.4	-0.83	-14.9	-0.84	-14.6	-0.76	
FR7	-0.18	-4.3	-0.13	-3.1	-0.14	-3.2	-0.29	-6.3	-0.54	-10.7	-1.11	-18.6	-0.65	-10.4	-0.31	-4.9	-0.19	
FR8	-0.3	-6.4	-0.3	-6.3	-0.42	-8.3	-0.62	-11.3	-0.4	-6.5	-0.12	-1.9	-0.15	-2.2	-0.13	-1.9	-0.27	
FR9	0.24	4.9	0.46	9.1	0.31	5.8	0.26	4.5	0.06	1.0	0.02	0.3	0.06	0.9	0.12	1.3	0.3	
FR10	0.38	8.8	0.26	5.4	0.29	5.9	0.23	4.3	-0.01	-0.2	-0.1	-1.6	-0.09	-1.3	-0.16	-2.3	-0.06	
FR11	-1.46	-35.0	-1.99	-42.3	-2.21	-44.8	-2.5	-47.7	-2.89	-51.0	-3.25	-52.9	-3.47	-53.4	-3.53	-53.2	-3.95	
MR1	-0.23	-5.2	-0.21	-4.6	-0.21	-4.5	-0.25	-5.1	-0.26	-5.0	-0.44	-7.9	-0.46	-7.8	-0.46	-7.7	-0.25	
MR2	0.19	4.7	0.2	4.8	0.14	3.2	0.06	1.7	-0.12	-2.4	-0.33	-6.0	-0.29	-5.0	-0.29	-4.9	-0.29	
MR3	0.49	13.2	0.45	11.6	0.44	11.0	0.42	10.0	0.42	9.3	0.08	1.6	-0.33	-5.8	-0.37	-6.2	-0.41	
MR4	0.46	11.6	0.41	10.2	0.45	10.9	0.37	8.4	0.44	9.5	0.43	8.8	0.53	10.5	0.52	10.0	0.58	
MR5	0.71	47.7	0.73	35.8	0.71	29.5	0.82	26.9	0.39	7.8	-0.03	-0.6	-0.05	-0.8	-0.11	-1.6	-0.08	
MR6	0.53	25.1	0.16	6.4	-0.35	-11.6	-0.81	-23.1	-2.8	-49.9	-3.34	-52.5	-3.54	-52.1	-3.67	-52.0	-3.83	
LBR1	0.5	14.1	0.47	10.8	0.36	7.4	0.37	7.2	0.37	6.8	0.46	8.2	0.35	5.6	0.38	6.2	0.23	
LBR2	0.6	16.3	0.71	18.4	0.72	18.1	0.77	18.5	0.76	17.3	0.79	17.2	0.79	16.6	0.82	16.8	0.55	
LBR3	-0.38	-13.1	-0.62	-18.9	-0.67	-19.3	-0.66	-17.9	-0.65	-16.5	-0.7	-16.1	-0.91	-19.2	-1.08	-21.6	-1.18	
BR1	-1.42	-41.2	-0.86	-24.4	-0.43	-12.0	-0.09	-2.3	0.25	6.2	0.39	9.2	0.25	5.5	0.23	5.0	0.27	
BR2	-0.93	-26.5	-0.86	-20.3	-0.81	-20.7	-0.67	-16.7	-0.4	-11.6	-0.07	-1.9	0.09	2.3	0.09	2.3	0.11	
BR3	-1.23	-40.6	-1.23	-37.7	-1.3	-37.8	-1.32	-36.5	-1.23	-32.5	-0.93	-23.5	-0.61	-15.0	-0.55	-13.3	-0.43	
SCH1	-0.15	-6.3	-0.04	-1.6	0.01	0.4	0.03	1.1	0.15	3.0	0.54	15.8	0.47	12.5	0.53	13.6	0.46	
SCH2	-0.04	-1.1	-0.11	-2.8	-0.1	-2.5	-0.02	-0.5	-0.05	-1.2	-0.06	-1.3	-0.07	-1.5	-0.08	-1.7	-0.13	
SR	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	
StBr	-0.16	-4.2	0.09	2.1	-0.04	-0.9	0.03	0.6	-0.07	-1.2	-0.19	-3.1	-0.19	-2.9	-0.25	-3.8	-0.22	

Table A-2 Delta (Project – Existing) D.O. Percentiles for Critical Cells; Plan 6a, 5 ft deepening, No injections

Zone	Delta D.O. Percentile																	
	1%		5%		10%		25%		50%		75%		90%		95%		99	
	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	
FR1	0.01	0.3	0	0.0	0	0.0	-0.02	-0.5	-0.04	-0.9	-0.04	-0.9	-0.07	-1.5	-0.1	-2.1	-0.09	-1.9
FR2	-0.14	-3.8	0.2	5.3	0.38	9.9	0.44	10.9	0.39	9.2	0.38	8.6	0.3	8.5	0.41	8.7	0.23	4.5
FR3	0.12	3.4	0.07	1.9	0.06	1.6	0.04	1.0	-0.01	-0.2	-0.07	-1.6	-0.2	-4.2	0.02	0.4	-0.13	2.3
FR4	0.11	3.1	0.1	2.8	0.08	2.2	0	0.0	-0.04	-1.0	-0.2	-4.5	-0.36	-7.3	-0.29	-5.5	0.03	0.5
FR5	0.11	3.0	0.04	1.1	-0.01	-0.3	-0.03	-0.7	-0.13	-3.0	0.51	10.4	-0.59	-10.9	-0.56	-9.9	0.5	8.7
FR6	0.03	0.8	0.07	1.9	0	0.0	-0.05	-1.2	-0.07	-1.6	-0.4	-8.4	-0.71	-12.7	-0.62	-10.7	-0.57	-9.6
FR7	0.23	5.5	0.28	6.6	0.32	7.4	0.28	6.1	0.42	8.3	-0.06	-0.8	0.05	0.8	0.19	3.0	0.63	9.7
FR8	-0.27	-5.8	-0.26	-5.4	-0.38	-7.5	-0.54	-9.8	-0.27	-4.4	-0.06	-0.9	-0.11	-1.6	-0.12	-1.8	-0.23	-3.2
FR9	0.03	0.6	0.29	5.8	0.15	2.8	0.25	4.4	0.1	1.6	0.09	1.4	0.17	2.5	0.18	2.6	0.17	2.4
FR10	0.38	8.6	0.26	5.4	0.28	5.7	0.23	4.3	-0.02	-0.3	-0.11	-1.7	-0.08	-1.2	-0.16	-2.3	-0.06	-0.8
FR11	-1.46	-35.0	-1.99	-42.3	-2.21	-44.8	-2.5	-47.7	-2.89	-51.0	-3.25	-52.9	-3.47	-53.4	-3.53	-53.2	-3.95	-56.4
MR1	-0.21	-4.8	-0.19	-4.2	-0.19	-4.1	-0.23	-4.7	-0.22	-4.3	-0.42	-7.5	-0.42	-7.1	-0.34	-5.7	-0.23	-3.7
MR2	0.19	4.7	0.21	5.1	0.16	3.7	0.09	1.9	-0.09	-1.8	0.29	5.2	-0.25	-4.3	-0.22	-3.7	-0.25	-4.1
MR3	0.49	13.2	0.47	12.1	0.44	11.0	0.45	10.7	-0.42	-9.3	0.12	2.4	-0.3	-5.3	-0.33	-5.6	-0.36	-5.9
MR4	0.47	12.1	0.42	10.4	0.47	11.4	0.38	8.7	0.45	9.8	0.41	8.4	0.53	10.5	0.51	9.8	0.58	10.7
MR5	0.71	47.7	0.74	36.3	0.71	29.5	0.81	26.6	0.39	7.8	-0.04	-0.6	-0.04	-0.6	-0.11	-1.6	-0.08	-1.1
MR6	0.53	25.1	0.16	6.4	-0.35	-11.6	-0.81	-23.1	-2.8	-49.9	-3.34	-52.5	-3.54	-52.1	-3.67	-52.0	-3.83	-52.3
LBR1	-0.49	-13.7	0.47	10.8	0.37	7.8	0.36	7.0	0.37	6.8	0.46	8.2	0.35	5.9	0.39	6.3	0.23	3.6
LBR2	0.79	21.4	0.71	18.4	0.72	18.1	0.76	18.3	0.75	17.1	0.78	17.0	0.79	16.6	0.8	16.4	0.55	10.5
LBR3	-0.36	-12.1	-0.61	-18.6	-0.65	-18.7	-0.64	-17.4	-0.63	-15.9	-0.71	-16.4	-0.91	-19.2	-1.1	-22.0	-1.22	-23.3
BR1	-1.53	-44.3	-1.01	-28.7	-0.54	-15.0	-0.11	-2.8	0.22	5.5	0.37	8.7	0.26	5.7	0.24	5.2	0.29	6.2
BR2	-0.96	-27.6	-1.04	-28.6	-1.01	-23.8	-0.88	-27.2	-0.68	-19.8	-0.64	-17.3	-0.52	-13.5	-0.52	-13.2	-0.47	-11.2
BR3	-1.31	-43.2	-1.31	-40.2	-1.39	-40.4	-1.4	-36.7	-1.31	-34.7	-1.03	-26.1	-0.68	-16.7	-0.62	-14.9	-0.51	-12.0
SCH1	-0.09	-3.8	-0.1	-3.9	0	0.0	0.08	2.8	0.84	1.3	-0.13	-3.8	-0.13	-3.4	-0.11	-2.8	-0.23	-5.6
SCH2	-0.06	-1.6	-0.11	-2.8	-0.09	-2.2	-0.05	-1.2	-0.05	-1.2	-0.04	-0.9	-0.05	-1.1	-0.07	-1.5	-0.06	-1.2
SR	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2
StBr	-0.09	-2.3	0.08	1.9	0.02	0.4	0.07	1.4	-0.02	-0.4	-0.15	-2.4	-0.17	-2.6	-0.19	-2.9	-0.18	-2.6

Table A-3 Delta (Project – Existing) D.O. Percentiles for Critical Cells: Plan 6a, 4 ft deepening, No injections

Zone	Delta D.O. Percentile																	
	1%		5%		10%		25%		50%		75%		90%		95%		99	
	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%
FR1	0	0.0	-0.02	0.5	-0.03	0.7	-0.01	0.2	-0.05	-1.1	-0.03	-0.7	-0.04	-0.9	-0.06	-1.3	-0.06	-1.3
FR2	-0.16	-4.4	0.19	5.1	0.37	8.6	0.43	10.7	0.4	9.5	0.4	9.1	0.31	6.7	0.42	9.0	0.34	4.7
FR3	0.1	2.9	0.05	1.4	0.04	1.1	0.05	1.6	0	0.0	-0.06	-1.4	-0.13	-2.7	0.09	1.8	-0.08	-1.4
FR4	-0.09	-2.6	0.08	2.2	0.08	2.2	-0.01	0.3	-0.01	-0.2	-0.17	-3.9	-0.31	-6.2	-0.19	-3.6	0.1	-1.8
FR5	0.1	2.8	0.01	0.3	-0.07	-1.8	0.06	-1.5	-0.17	-3.9	0.59	-12.1	-0.6	-11.1	0.6	-10.7	-0.57	-9.9
FR6	0.05	1.4	0.07	1.9	0.01	0.3	-0.04	-1.0	-0.05	-1.2	-0.38	-7.9	-0.57	-10.2	-0.44	-7.6	-0.43	-7.3
FR7	0.51	12.2	0.58	13.6	0.7	16.2	0.73	15.8	0.82	16.3	0.31	5.2	0.27	4.3	0.4	6.3	0.33	9.7
FR8	-0.23	-4.7	-0.22	-4.6	-0.31	-6.1	-0.48	-8.7	-0.18	-2.9	-0.04	-0.6	-0.07	-1.0	-0.06	-1.3	-0.22	-3.1
FR9	-0.28	-5.7	-0.35	-7.0	-0.47	-8.8	-0.6	-10.5	0.4	-6.4	-0.22	-3.3	-0.19	-2.8	-0.27	-3.8	-0.18	-2.5
FR10	-0.38	-8.8	0.26	5.4	0.27	5.5	0.24	4.5	-0.01	-0.2	-0.12	-1.9	-0.08	-1.2	-0.15	-2.1	-0.07	-1.0
FR11	-1.46	-35.0	-1.59	-42.3	-2.21	-44.8	-2.5	-47.7	-2.89	-51.0	-3.25	-52.9	-3.47	-53.4	-3.53	-53.2	-3.95	-55.4
MR1	-0.17	-3.9	-0.16	-3.5	-0.14	-3.0	-0.2	-4.1	-0.18	-3.7	0.37	8.6	-0.32	-5.4	-0.27	-4.5	-0.12	-1.9
MR2	0.21	5.2	0.23	5.5	0.16	3.7	0.1	2.2	-0.06	-1.2	-0.26	-4.7	-0.22	-3.8	-0.18	-3.1	-0.2	-3.3
MR3	-0.52	-14.1	0.41	10.5	0.43	10.8	0.47	11.2	0.39	8.6	0.06	1.2	-0.37	-6.5	-0.47	-7.9	-0.48	-7.8
MR4	0.47	12.1	0.42	10.4	0.47	11.4	0.39	8.9	0.45	9.8	0.45	9.2	0.51	10.1	0.51	9.8	0.57	10.5
MR5	-0.71	-17.7	0.74	18.3	0.71	19.5	0.81	20.6	0.38	7.6	-0.03	-0.5	-0.04	-0.6	-0.11	-1.6	-0.07	-1.0
MR6	0.53	12.9	0.16	4.4	-0.35	-11.6	-0.81	-23.1	-2.8	-49.9	-3.94	-52.5	-3.54	-52.1	-3.67	-52.0	-3.83	-52.3
LBR1	0.46	12.9	0.46	10.6	0.38	8.0	0.36	7.0	0.37	8.6	0.48	8.2	0.35	5.9	0.39	6.3	0.21	3.2
LBR2	0	0.0	0.7	18.1	0.71	17.9	0.77	18.5	0.75	17.1	0.78	17.0	0.78	16.4	0.8	16.4	0.54	10.5
LBR3	-0.3	-10.4	-0.6	-16.3	-0.63	-18.2	-0.62	-16.8	-0.62	-15.7	-0.7	-16.1	-0.92	-19.5	-1.1	-22.0	-1.2	-22.9
BR1	-1.63	-47.2	-1.18	-33.5	-0.61	-17.0	-0.16	-4.1	0.21	5.2	0.38	9.0	0.26	5.7	0.24	5.2	0.29	6.2
BR2	-1.14	-44.7	-1.05	-37.0	-1	-33.4	-0.82	-25.3	-0.51	-14.8	-0.15	-4.1	0.02	0.5	0.06	1.5	0.13	3.2
BR3	-1.41	-46.5	-1.41	-43.3	-1.45	-42.2	-1.46	-40.3	-1.37	-36.2	-1.13	-28.6	-1.04	-26.1	-0.66	-15.9	-0.59	-15.9
SCH1	-0.11	-4.6	-0.1	-3.9	0.02	0.7	0.07	2.5	0.04	1.3	-0.13	-3.8	-0.16	-4.2	-0.09	-2.3	-0.14	-3.4
SCH2	-0.04	-1.1	-0.05	-1.3	-0.06	-1.5	-0.05	-1.2	-0.06	-1.4	0.07	1.6	-0.08	-1.3	-0.06	-1.3	-0.05	-1.0
SR	-0.01	-0.2	0	0.0	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2
SbR	-0.02	-0.5	0.1	2.4	0.07	1.5	0.11	2.2	-0.02	-0.4	-0.09	-1.5	-0.13	-2.0	-0.15	-2.3	-0.19	-2.8

Table A-4 Delta (Project – Existing) D.O. Percentiles for Critical Cells: Plan 6a, 3 ft deepening, No injections

Zone	Delta D.O. Percentile																	
	1%		5%		10%		25%		50%		75%		90%		95%		99	
	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%
FR1	0.01	0.3	-0.01	-0.3	-0.02	-0.5	-0.02	-0.5	-0.04	-0.9	-0.02	-0.4	-0.02	-0.4	-0.06	-1.3	-0.03	0.6
FR2	-0.15	-4.1	0.19	5.1	0.38	9.9	0.43	10.7	0.4	9.5	0.41	9.3	0.31	6.7	0.43	9.2	0.23	4.5
FR3	0.1	2.9	0.05	1.4	0.05	1.4	0.08	2.1	0.03	0.7	0.01	0.2	-0.1	-2.1	0.13	2.6	-0.05	-0.9
FR4	0.1	2.9	0.08	2.2	0.07	1.9	0.05	1.3	0.01	0.2	-0.11	-2.5	-0.2	-4.0	-0.08	-1.5	0.11	2.0
FR5	0.1	2.8	0.03	0.8	-0.03	-0.6	-0.02	-0.5	-0.11	-2.6	-0.51	-10.4	-0.41	-7.6	-0.36	-6.4	-0.31	-5.4
FR6	0.07	1.9	0.08	2.1	0.02	0.5	0	0.0	-0.02	-0.5	-0.31	-6.5	-0.39	-7.0	-0.29	-5.0	-0.28	-4.7
FR7	-0.11	-2.6	-0.07	-1.6	-0.1	-2.3	-0.2	-4.3	-0.37	-7.4	0.6	-10.0	-0.21	-3.4	-0.15	-3.4	-0.1	-1.5
FR8	-0.19	-4.1	-0.22	-4.6	-0.34	-8.7	-0.48	-8.7	-0.25	-4.1	-0.18	-2.8	-0.21	-3.1	-0.19	-2.8	-0.25	-3.5
FR9	-0.23	-4.7	-0.3	-6.0	-0.41	-7.7	-0.49	-8.6	-0.31	-4.9	-0.17	-2.6	-0.17	-2.5	-0.26	-3.7	-0.16	-2.5
FR10	0.38	8.8	0.26	5.4	0.27	5.5	0.23	4.3	-0.01	-0.2	-0.12	-1.9	-0.08	-1.2	-0.16	-2.3	-0.07	-1.0
FR11	-1.46	-35.0	-1.59	-42.3	-2.21	-44.8	-2.5	-47.7	-2.89	-51.0	-3.25	-52.9	-3.47	-53.4	-3.53	-53.2	-3.95	-55.4
MR1	-0.13	-2.9	-0.13	-2.9	-0.09	-0.9	-0.15	-3.1	-0.14	-2.7	0.3	5.4	-0.21	-3.6	-0.18	-3.0	-0.08	-1.3
MR2	0.21	5.2	0.24	5.8	0.18	4.2	0.11	2.4	-0.05	-1.0	-0.2	-3.6	-0.17	-2.9	-0.1	-1.7	-0.13	-2.2
MR3	-0.52	-14.1	0.5	12.9	0.47	11.8	0.49	11.7	0.43	9.5	0.15	3.0	-0.22	-3.9	-0.25	-4.2	-0.3	-4.8
MR4	0.5	12.9	0.45	10.7	0.48	11.7	0.39	8.9	0.44	9.5	0.41	8.4	0.51	10.1	0.5	9.7	0.56	10.4
MR5	0.72	18.3	0.76	19.3	0.7	19.0	0.79	20.9	0.38	7.6	-0.04	-0.6	-0.05	-0.8	-0.11	-1.6	-0.07	-1.0
MR6	0.53	12.9	0.16	4.4	-0.35	-11.6	-0.81	-23.1	-2.8	-49.9	-3.94	-52.5	-3.54	-52.1	-3.67	-52.0	-3.83	-52.3
LBR1	0.44	12.3	0.47	10.8	0.39	8.2	0.35	6.8	0.39	8.4	0.45	8.0	0.34	5.7	0.37	6.0	0.2	3.1
LBR2	0.79	21.4	0.73	18.9	0.73	18.4	0.76	18.3	0.75	17.1	0.79	17.2	0.79	16.6	0.82	16.8	1.22	23.2
LBR3	-0.3	-10.4	-0.6	-16.3	-0.61	-17.6	-0.61	-16.5	-0.6	-15.2	-0.7	-16.1	-0.92	-19.5	-1.08	-21.8	-1.2	-22.8
BR1	-1.76	-51.0	-1.32	-37.5	-0.77	-21.4	-0.21	-4.4	0.23	5.7	0.37	8.7	0.27	5.9	0.25	5.4	0.31	6.6
BR2	-1.26	-49.4	-1.31	-46.1	-1.26	-41.8	-1.02	-31.5	-0.79	-23.0	-0.74	-20.0	-0.64	-16.7	-0.63	-16.0	-0.57	-14.7
BR3	-1.55	-51.2	-1.51	-46.3	-1.57	-45.6	-1.54	-42.5	-1.44	-38.1	-1.21	-30.6	-0.8	-19.6	-0.74	-17.8	-0.61	-14.4
SCH1	-0.17	-7.1	0	0.0	0	0.0	0.04	1.4	0.2	6.6	0.62	16.2	0.56	14.9	0.58	14.4	0.47	11.4
SCH2	0	0.0	-0.06	-1.5	-0.03	-0.7	-0.04	-1.0	-0.04	-0.9	-0.04	-0.9	-0.05	-1.1	-0.04	-0.9	-0.04	-0.8
SR	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	0	0.0	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2
SbR	0.11	2.9	0.14	3.3	0.12	2.6	0.13	2.8	-0.01	-0.2	-0.07	-1.1	-0.11	-1.7	-0.11	-1.7	-0.12	-1.8

Table A-5 Delta (Project – Existing) D.O. Percentiles for Critical Cells: Plan 6b, 2 ft deepening, No injections

Zone	Delta D.O. Percentile																	
	1%		5%		10%		25%		50%		75%		90%		95%		99%	
	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%
FR1	-0.02	-0.5	-0.03	-0.8	-0.05	-1.2	-0.03	-0.7	-0.04	-0.9	0	0.0	-0.02	-0.4	-0.03	-0.6	-0.01	-0.2
FR2	-0.25	-6.6	0.12	3.2	0.28	7.3	0.41	10.2	0.38	9.0	0.41	9.3	0.35	7.6	0.45	9.6	0.28	5.1
FR3	0.09	2.6	0.02	0.6	0.05	1.4	0.07	1.8	0.03	0.7	0.03	0.7	0.07	1.5	0.18	3.6	0	0.0
FR4	0.07	2.0	0.06	1.7	0.06	1.7	0.03	0.8	0.03	0.7	-0.06	-1.4	-0.13	-2.6	-0.08	-1.7	0.03	0.5
FR5	0.08	2.2	0	0	0.09	2.3	0.05	1.2	0.15	3.5	0.5	10.2	0.35	6.5	0.28	5.0	0.23	4.0
FR6	0.06	1.6	0.08	2.1	0.02	0.5	0	0.0	0	0.0	-0.25	-5.2	-0.25	-4.5	-0.18	-3.1	-0.19	-3.2
FR7	0.38	9.1	0.4	9.4	0.47	10.9	0.45	9.8	0.58	11.5	0.13	2.2	0.12	1.9	0.17	2.7	0.54	8.3
FR8	-0.14	-3.0	-0.17	-3.6	-0.28	-5.5	-0.4	-7.3	-0.16	-2.6	-0.12	-1.9	-0.18	-2.7	-0.17	-2.5	-0.22	-3.1
FR9	0.28	5.7	0.61	12.1	0.47	8.8	0.44	7.7	0.18	2.9	0.15	2.3	0.21	3.1	0.16	2.3	0.16	2.2
FR10	0.3	7.0	0.23	4.8	0.19	3.8	0.16	3.0	-0.05	-0.8	-0.17	-2.6	-0.1	-1.5	-0.24	-3.4	-0.08	-1.2
FR11	-1.45	-35.0	-1.99	-42.3	-2.21	-44.8	-2.5	-47.7	-2.89	-51.0	-3.25	-52.9	-3.47	-53.4	-3.53	-53.2	-3.95	-55.4
MR1	-0.1	-2.3	-0.1	-2.2	-0.05	-1.3	0.13	2.7	-0.13	-2.5	-0.27	-4.8	-0.15	-2.5	-0.09	-1.5	-0.04	-0.6
MR2	0.16	4.0	0.17	4.1	0.07	1.6	0.02	0.4	0.13	2.6	0.21	3.8	0.11	1.9	0.09	1.5	0.09	1.5
MR3	0.41	11.1	0.32	8.2	0.34	8.5	0.32	7.6	0.28	6.2	0.01	0.2	-0.43	-7.5	-0.45	-7.6	-0.47	-7.6
MR4	-0.05	-1.3	0.65	16.1	0.79	19.2	0.82	18.7	0.85	18.7	0.88	18.0	1	19.8	1.07	20.7	1.31	24.2
MR5	-0.09	-5.0	-0.48	-23.5	-0.59	-24.5	-0.5	-16.4	0.04	0.8	0.12	1.9	-0.12	-1.5	-0.17	-2.5	-0.13	-1.8
MR6	3.32	157.3	3.37	135.3	3.16	105.0	3.03	86.3	1.19	21.2	0.79	12.4	0.58	8.5	0.41	5.8	0.25	3.4
LBR1	-0.39	-10.9	-0.14	-3.2	0.05	1.7	0.13	2.5	0.07	1.3	0.16	2.8	0.11	1.8	0.13	2.1	0.05	0.8
LBR2	0.14	3.8	0.26	6.7	0.24	6.0	0.25	6.0	0.25	5.7	0.27	5.9	0.25	5.2	0.3	6.1	0.43	8.2
LBR3	-1.13	-39.1	-1.32	-40.2	-1.4	-40.3	-1.29	-35.1	-1.21	-30.6	-1.26	-28.8	-1.43	-30.2	-1.56	-31.3	-1.71	-32.6
BR1	-2.32	-67.2	-1.76	-50.0	-1.04	-29.0	0.37	-9.5	0.17	4.2	0.36	8.5	0.27	5.9	0.26	5.6	0.32	6.8
BR2	-1.93	-75.7	-1.95	-68.7	-1.83	-51.2	-1.41	-43.5	-1.06	-30.8	-1.02	-27.6	-0.87	-22.7	-0.82	-20.9	-0.75	-18.6
BR3	-2.22	-73.3	-2.19	-67.2	-2.21	-64.2	-2.14	-59.1	-2.03	-53.7	-1.57	-39.7	-1.08	-26.5	-0.97	-23.4	-0.67	-20.5
SCh1	-0.06	-2.5	-0.06	-2.5	0	0.0	0.02	0.7	0.04	1.3	0.11	3.2	0.11	2.9	-0.07	-1.8	-0.14	-3.4
SCh2	0	0.0	0.04	1.0	0.04	1.0	0.04	1.0	0.04	0.9	0.04	0.9	0.04	0.9	0.04	0.9	0.01	0.2
SR	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	0	0.0	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2	-0.01	-0.2
StBr	0.23	6.0	0.26	6.2	0.17	3.7	0.18	3.6	0.02	0.4	0.06	1.0	0.07	1.1	0.07	1.1	0.06	0.9

Table A-6 Delta (Project – Existing) D.O. Percentiles for Zones' Averages: Plan 6a, 6 ft deepening, No injections

Zone Name	Project - Baseline Difference (mg/l)									Project - Baseline Relative Difference (%)								
	1%	5%	10%	25%	50%	75%	90%	95%	99%	1%	5%	10%	25%	50%	75%	90%	95%	99%
FR1	-0.05	-0.07	-0.07	-0.04	-0.07	-0.09	-0.13	-0.11	-0.13	-1.2	-1.6	-1.7	-0.9	-1.5	-1.9	-2.6	-2.3	-2.5
FR2	0.03	-0.02	-0.04	-0.03	-0.07	-0.09	-0.14	-0.14	-0.14	0.7	-0.5	-1.0	-0.7	-1.6	-1.9	-2.8	-2.9	-2.8
FR3	-0.08	-0.07	-0.08	-0.08	-0.10	-0.16	-0.26	-0.39	-0.52	-2.0	-1.6	-1.4	-1.8	-2.1	-3.3	-5.3	-7.8	-9.9
FR4	-0.11	-0.10	-0.12	-0.12	-0.20	-0.37	-0.56	-0.71	-0.77	-2.6	-2.4	-2.9	-2.8	-4.4	-7.6	-10.7	-12.6	-13.1
FR5	-0.11	-0.15	-0.15	-0.19	-0.30	-0.52	-0.75	-0.71	-0.63	-2.7	-3.5	-3.5	-4.2	-6.3	-10.0	-13.2	-12.0	-10.4
FR6	-0.15	-0.19	-0.27	-0.32	-0.52	-0.74	-0.82	-0.57	-0.48	-3.6	-4.4	-6.0	-6.9	-10.3	-13.2	-13.6	-9.4	-7.8
FR7	-0.28	-0.36	-0.42	-0.53	-0.69	-0.95	-0.38	-0.37	-0.38	-6.0	-7.4	-8.4	-10.0	-11.5	-7.1	-5.8	-5.5	-5.5
FR8	-0.40	-0.54	-0.54	-0.60	-0.49	-0.29	-0.26	-0.35	-0.33	-7.8	-10.0	-9.8	-10.2	-7.7	-4.3	-3.8	-4.9	-4.6
FR9	-0.56	-0.50	-0.50	-0.37	-0.23	-0.19	-0.23	-0.19	-0.16	-9.7	-8.3	-8.1	-6.8	-3.5	-2.7	-3.1	-2.6	-2.2
FR10	-0.21	-0.09	-0.10	-0.12	-0.10	-0.08	-0.07	-0.07	-0.06	-3.5	-1.6	-1.6	-1.8	-1.5	-1.2	-0.9	-1.0	-1.0
FR11	-0.42	-0.40	-0.41	-0.44	-0.47	-0.46	-0.52	-0.51	-0.48	-7.3	-6.8	-6.9	-7.0	-7.1	-6.7	-7.1	-7.1	-6.5
MR1	-0.27	-0.28	-0.28	-0.30	-0.33	-0.48	-0.40	-0.39	-0.34	-5.6	-5.8	-5.6	-5.7	-6.0	-7.6	-6.7	-6.3	-5.5
MR2	-0.02	-0.04	-0.09	-0.15	-0.24	-0.40	-0.40	-0.39	-0.27	-6.4	-6.8	-1.7	-2.6	-4.3	-6.8	-6.5	-6.4	-4.3
MR3	0.24	0.16	0.14	0.12	0.05	-0.14	-0.31	-0.31	-0.36	5.3	3.4	3.0	2.4	1.0	-2.5	-5.1	-5.0	-5.7
MR4	0.13	0.08	0.13	0.18	0.16	0.17	0.21	0.29	0.30	2.6	1.2	2.5	3.2	2.8	2.9	3.5	4.7	4.8
MR5	0.04	0.14	0.15	0.14	0.03	-0.05	-0.07	-0.15	-0.07	1.3	-3.1	-3.2	2.8	0.6	-0.7	-1.0	-2.2	-0.9
MR6	-0.18	-0.25	-0.34	-0.44	-0.89	-1.16	-1.41	-1.48	-1.64	-3.6	-5.6	-7.1	-8.6	-15.1	-17.9	-20.2	-20.8	-22.3
LBR1	0.14	0.16	0.22	0.21	0.25	0.30	0.35	0.41	0.41	3.0	3.3	4.2	4.0	4.5	5.3	5.9	6.9	6.8
LBR2	0.33	0.29	0.28	0.35	0.36	0.37	0.46	0.45	0.43	7.5	6.4	6.1	7.2	7.0	7.0	6.6	5.3	7.8
LBR3	-0.28	-0.18	-0.14	-0.13	-0.09	0.01	0.10	0.14	0.23	-6.7	-4.4	-3.3	-2.9	-2.0	0.3	2.1	2.8	4.6
BR1	-0.86	-0.46	-0.28	-0.07	0.12	0.12	0.11	0.08	0.08	-23.1	-12.0	-7.0	-1.7	2.7	2.7	2.4	1.7	1.9
BR2	-1.08	-1.04	-1.01	-0.94	-0.83	-0.73	-0.65	-0.58	-0.52	-29.9	-28.3	-27.0	-24.5	-15.7	-3.0	-1.1	-4.0	-2.6
BR3	-1.07	-1.02	-1.00	-0.94	-0.86	-0.72	-0.62	-0.63	-0.63	-28.1	-26.8	-26.1	-24.0	-23.2	-20.5	-16.8	-14.3	-14.2
SCh1	-0.22	-0.20	-0.19	-0.14	-0.14	-0.18	-0.21	-0.21	-0.21	-5.2	-4.7	-4.5	-3.3	-3.2	-4.1	-4.5	-4.4	-4.3
SCh2	-0.17	-0.13	-0.16	-0.13	-0.13	-0.17	-0.19	-0.17	-0.23	-3.9	-3.0	-3.5	-2.9	-2.7	-3.4	-3.8	-3.4	-4.5
SR	-0.15	-0.15	-0.15	-0.16	-0.15	-0.13	-0.18	-0.17	-0.18	-2.5	-2.6	-2.4	-2.4	-2.1	-1.9	-2.4	-2.3	-2.3
StBr	-0.21	-0.14	-0.18	-0.22	-0.22	-0.25	-0.28	-0.35	-0.43	-3.9	-2.6	-3.3	-3.9	-3.6	-4.0	-4.3	-5.3	-6.4

Table A-7 Delta (Project – Existing) D.O. Percentiles for Zones' Averages: Plan 6a, 5 ft deepening, No injections

Zone Name	Project - Baseline Difference (mg/l)									Project - Baseline Relative Difference (%)								
	1%	5%	10%	25%	50%	75%	90%	95%	99%	1%	5%	10%	25%	50%	75%	90%	95%	99%
FR1	0.06	-0.09	-0.07	-0.05	-0.08	-0.10	-0.12	-0.10	-0.12	-1.4	-2.0	-1.6	-1.2	-1.7	-2.0	-2.5	-2.1	-2.5
FR2	0.02	-0.03	-0.04	-0.03	-0.08	-0.08	-0.12	-0.14	-0.14	0.5	-0.7	-0.9	-0.7	-1.7	-1.6	-2.5	-2.8	-3.9
FR3	-0.08	-0.07	-0.06	-0.09	-0.10	-0.15	-0.23	-0.36	-0.49	-2.1	-1.8	-1.6	-2.1	-2.2	-3.3	-4.7	-7.1	-9.3
FR4	-0.11	-0.10	-0.12	-0.12	-0.20	-0.38	-0.50	-0.63	-0.63	-2.8	-2.5	-2.9	-2.8	-4.4	-7.2	-9.6	-11.2	-10.7
FR5	-0.11	-0.15	-0.15	-0.18	-0.28	-0.48	-0.64	-0.57	-0.50	-2.6	-3.5	-3.3	-4.0	-6.0	-9.3	-11.3	-9.7	-8.3
FR6	-0.14	-0.19	-0.27	-0.30	-0.49	-0.66	-0.67	-0.46	-0.37	-3.4	-4.3	-5.9	-6.5	-9.6	-11.9	-11.2	-7.5	-5.9
FR7	-0.26	-0.33	-0.38	-0.48	-0.61	-0.37	-0.33	-0.34	-0.38	-5.6	-6.8	-7.7	-9.1	-10.2	-5.9	-5.1	-5.1	-5.5
FR8	-0.36	-0.49	-0.51	-0.56	-0.38	-0.25	-0.24	-0.32	-0.25	-7.0	-9.1	-9.2	-9.5	-6.0	-3.8	-3.5	-4.5	-3.4
FR9	-0.49	-0.42	-0.42	-0.31	-0.20	-0.17	-0.20	-0.16	-0.13	-8.5	-7.0	-6.9	-4.8	-3.0	-2.5	-2.6	-2.1	-1.7
FR10	-0.22	-0.09	-0.10	-0.12	-0.10	-0.08	-0.05	-0.06	-0.07	-3.6	-1.6	-1.6	-1.8	-1.5	-1.2	-0.7	-0.8	-1.0
FR11	-0.42	-0.40	-0.41	-0.45	-0.47	-0.46	-0.52	-0.51	-0.48	-7.3	-6.8	-6.8	-7.0	-7.1	-6.7	-7.1	-7.1	-6.5
MR1	-0.26	-0.26	-0.26	-0.27	-0.30	-0.41	-0.36	-0.31	-0.35	-5.3	-5.4	-5.2	-5.2	-5.3	-7.0	-5.9	-9.1	-5.5
MR2	0.00	0.03	-0.08	-0.12	-0.22	-0.35	-0.33	-0.32	-0.25	0.0	-0.6	-1.6	-2.3	-3.9	-5.9	-5.5	-5.2	-4.1
MR3	0.23	0.16	0.17	0.14	0.06	-0.14	-0.29	-0.29	-0.35	5.1	3.4	3.5	2.8	1.2	-2.3	-4.7	-4.7	-5.5
MR4	0.14	0.05	0.13	0.17	0.15	0.17	0.21	0.29	0.30	2.7	1.0	2.5	3.1	2.7	2.9	3.5	4.7	4.9
MR5	0.05	0.13	0.15	0.15	0.03	-0.05	-0.07	-0.15	-0.07	1.2	-2.9	3.1	-2.9	0.6	-0.7	-1.0	-2.1	-0.9
MR6	-0.15	-0.24	-0.34	-0.45	-0.90	-1.16	-1.40	-1.49	-1.64	-3.8	-5.4	-7.2	-8.8	-15.1	-17.9	-20.2	-20.8	-22.3
LBR1	0.14	0.17	0.22	0.21	0.24	0.29	0.35	0.41	0.40	2.8	3.4	4.4	4.0	4.4	5.1	6.0	6.8	8.7
LBR2	0.30	0.30	0.29	0.34	0.35	0.30	0.45	0.43	0.45	7.4	6.5	6.3	7.0	6.6	7.2	8.5	8.0	8.2
LBR3	-0.26	-0.17	-0.13	-0.12	-0.09	0.02	0.11	0.13	0.23	-8.2	-4.0	-2.8	-2.7	-2.0	0.5	2.1	2.5	4.5
BR1	-0.93	0.52	-0.33	-0.11	0.09	0.12	0.11	0.09	0.11	-24.9	-13.7	-8.3	-2.7	2.1	2.7	2.4	2.0	2.2
BR2	-1.15	-1.09	-1.06	-1.01	-0.69	-0.17	-0.08	-0.18	-0.15	-31.8	-29.7	-28.3	-26.2	-17.3	-4.0	-1.7	-4.0	-3.2
BR3	-1.13	-1.07	-1.04	-0.97	-0.95	-0.87	-0.71	-0.61	-0.62	-29.7	-26.0	-27.1	-24.8	-23.5	-20.8	-16.6	-14.0	-14.0
SCh1	-0.22	-0.20	-0.19	-0.14	-0.15	-0.18	-0.20	-0.18	-0.17	-5.2	-4.8	-4.5	-3.4	-3.3	-3.9	-4.2	-3.9	-3.6
SCh2	-0.17	-0.12	-0.15	-0.13	-0.13	-0.16	-0.19	-0.16	-0.20	-3.9	-2.8	-3.3	-2.6	-2.7	-3.3	-3.7	-3.2	-3.8
SR	-0.15	-0.15	-0.15	-0.16	-0.15	-0.13	-0.18	-0.17	-0.18	-2.5	-2.6	-2.4	-2.4	-2.1	-1.9	-2.4	-2.3	-2.3
StbR	-0.17	-0.11	-0.17	-0.20	-0.19	-0.22	-0.24	-0.31	-0.35	-3.2	-2.1	-3.1	-3.4	-3.1	-3.5	-3.8	-4.7	-5.1

Table A-8 Delta (Project – Existing) D.O. Percentiles for Zones' Averages: Plan 6a, 4 ft deepening, No injections

Zone Name	Project - Baseline Difference (mg/l)									Project - Baseline Relative Difference (%)								
	1%	5%	10%	25%	50%	75%	90%	95%	99%	1%	5%	10%	25%	50%	75%	90%	95%	99%
FR1	-0.06	-0.08	-0.09	-0.06	-0.06	-0.09	-0.12	-0.12	-0.15	-1.5	-1.9	-1.9	-1.2	-1.3	-1.9	-2.5	-2.4	-2.9
FR2	0.02	-0.03	-0.05	-0.02	-0.07	-0.06	-0.10	-0.11	-0.12	0.4	-0.7	-1.2	-0.5	-1.4	-1.3	-2.3	-2.2	-2.4
FR3	-0.12	-0.07	-0.06	-0.07	-0.09	-0.14	-0.16	-0.30	-0.43	-2.9	-1.8	-1.5	-1.6	-2.0	-3.0	-3.8	-5.9	-8.1
FR4	-0.12	-0.11	-0.13	-0.12	-0.18	-0.32	-0.44	-0.52	-0.51	-3.0	-2.8	-3.0	-2.6	-4.0	-6.6	-8.3	-9.2	-8.7
FR5	-0.12	-0.16	-0.14	-0.17	-0.26	-0.43	-0.56	-0.45	-0.41	-2.8	-3.5	-3.2	-3.7	-5.6	-8.3	-9.9	-7.5	-6.8
FR6	-0.13	-0.17	-0.25	-0.28	-0.45	-0.59	-0.55	-0.35	-0.29	-3.2	-4.0	-5.4	-6.0	-8.8	-10.5	-9.0	-5.7	-4.7
FR7	-0.23	-0.28	-0.34	-0.44	-0.49	-0.29	-0.28	-0.31	-0.33	-5.1	-5.9	-6.0	-8.2	-8.2	-4.6	-4.3	-4.6	-4.8
FR8	-0.34	-0.43	-0.46	-0.51	-0.30	-0.22	-0.20	-0.29	-0.27	-6.6	-8.0	-8.3	-8.6	-4.8	-3.3	-2.9	-4.1	-3.8
FR9	-0.42	-0.35	-0.34	-0.27	-0.15	-0.14	-0.18	-0.12	-0.11	-7.2	-5.8	-5.6	-4.3	-2.3	-2.1	-2.4	-1.6	-1.5
FR10	-0.22	-0.10	-0.10	-0.12	-0.10	-0.08	-0.05	-0.05	-0.07	-3.7	-1.6	-1.6	-1.8	-1.5	-1.2	-0.7	-0.7	-0.9
FR11	-0.42	-0.40	-0.41	-0.45	-0.47	-0.46	-0.52	-0.51	-0.48	-7.3	-6.8	-6.9	-7.0	-7.1	-6.7	-7.2	-7.0	-6.5
MR1	-0.23	-0.23	-0.24	-0.24	-0.27	-0.37	-0.31	-0.28	-0.29	-4.9	-4.7	-4.8	-4.7	-4.8	-6.2	-5.1	-4.6	-4.6
MR2	0.01	0.00	-0.06	-0.09	-0.17	-0.31	-0.29	-0.30	-0.24	0.2	0.0	-1.3	-1.7	-3.1	-5.2	-4.7	-4.8	-3.9
MR3	0.25	0.17	0.17	0.14	0.08	-0.12	-0.27	-0.29	-0.33	5.4	3.7	3.5	2.7	1.5	-2.1	-4.4	-4.7	-5.3
MR4	0.14	0.05	0.12	0.17	0.16	0.17	0.22	0.28	0.29	2.8	1.0	2.3	3.1	2.8	2.9	3.6	4.6	4.7
MR5	0.05	0.12	0.15	0.14	0.04	-0.05	-0.08	-0.15	-0.07	1.2	2.7	3.3	-2.8	0.6	-0.8	-1.1	-2.1	-0.9
MR6	-0.14	-0.24	-0.34	-0.43	-0.90	-1.18	-1.40	-1.49	-1.64	-3.4	-5.3	-7.2	-8.4	-15.1	-17.9	-20.2	-20.8	-22.3
LBR1	0.13	0.17	0.22	0.21	0.24	0.30	0.36	0.41	0.40	2.7	3.3	4.3	4.0	4.4	5.2	6.2	6.8	6.6
LBR2	0.33	0.29	0.29	0.34	0.36	0.37	0.46	0.44	0.47	7.4	6.4	6.2	7.1	7.0	7.1	8.6	8.2	8.5
LBR3	-0.24	-0.16	-0.12	-0.12	-0.09	0.02	0.11	0.13	0.24	-5.9	-3.9	-2.8	-2.6	-1.9	0.5	2.1	2.6	4.7
BR1	-0.99	-0.50	-0.38	-0.13	0.09	0.13	0.13	0.10	0.11	-26.4	-15.6	-9.5	3.1	2.1	3.0	2.7	2.1	2.4
BR2	-1.23	-1.16	-1.10	-1.06	-0.76	-0.19	-0.10	-0.23	-0.16	-34.0	-31.4	-29.4	-27.6	-19.0	-4.5	-2.2	-4.9	-3.4
BR3	-1.15	-1.11	-1.06	-0.98	-0.95	-0.87	-0.70	-0.60	-0.60	-30.3	-29.1	-27.6	-25.1	-23.4	-20.8	-16.2	-13.8	-13.5
SCh1	-0.20	-0.18	-0.17	-0.13	-0.13	-0.17	-0.19	-0.21	-0.20	-4.8	-4.3	-4.0	-3.1	-3.1	-3.8	-4.2	-4.5	-4.2
SCh2	-0.17	-0.13	-0.15	-0.13	-0.11	-0.14	-0.16	-0.14	-0.18	-4.0	-3.0	-3.3	-2.8	-2.3	-2.9	-3.2	-2.8	-3.5
SR	-0.15	-0.15	-0.15	-0.16	-0.15	-0.13	-0.18	-0.17	-0.18	-2.5	-2.6	-2.4	-2.4	-2.1	-1.9	-2.4	-2.3	-2.3
StbR	-0.13	-0.08	-0.14	-0.16	-0.15	-0.17	-0.21	-0.28	-0.31	-2.4	-1.5	-2.6	-2.8	-2.5	-3.8	-3.2	-4.2	-4.6

Table A-9 Delta (Project – Existing) D.O. Percentiles for Zones' Averages: Plan 6a, 3 ft deepening, No injections

Zone Name	Project - Baseline Difference (mg/l)									Project - Baseline Relative Difference (%)								
	1%	5%	10%	25%	50%	75%	90%	95%	99%	1%	5%	10%	25%	50%	75%	90%	95%	99%
FR1	-0.05	-0.08	-0.07	-0.05	-0.06	-0.08	-0.11	-0.11	-0.14	-1.2	-1.7	-1.5	-1.0	-1.3	-1.7	-2.2	-2.3	-2.7
FR2	-0.02	-0.02	-0.03	-0.01	-0.06	-0.05	-0.08	-0.09	-0.09	-0.5	-0.5	-0.8	-0.3	-1.3	-1.0	-1.7	-1.8	-1.8
FR3	-0.11	-0.07	-0.06	-0.05	-0.07	-0.12	-0.13	-0.23	-0.32	-2.7	-1.8	-1.4	-1.1	-1.5	-2.5	-2.6	-4.6	-6.0
FR4	-0.12	-0.11	-0.11	-0.09	-0.16	-0.28	-0.34	-0.36	-0.37	-3.0	-2.7	-2.6	-2.1	-3.5	-5.8	-6.5	-6.5	-6.3
FR5	-0.10	-0.14	-0.13	-0.14	-0.23	-0.36	-0.44	-0.31	-0.30	-2.5	-3.2	-3.0	-3.1	-4.9	-6.9	-7.7	-5.2	-5.0
FR6	-0.13	-0.16	-0.21	-0.24	-0.39	-0.48	-0.38	-0.24	-0.20	-3.1	-3.6	-4.7	-5.2	-7.7	-8.5	-6.3	-4.0	-3.2
FR7	-0.20	-0.26	-0.30	-0.37	-0.39	-0.21	-0.23	-0.25	-0.28	-4.3	-5.3	-5.8	-6.9	-6.5	-3.3	-3.4	-3.8	-4.1
FR8	-0.30	-0.36	-0.38	-0.42	-0.23	-0.18	-0.17	-0.28	-0.19	-6.9	-6.6	-6.8	-7.1	-3.6	-2.8	-2.5	-3.9	-2.6
FR9	-0.34	-0.26	-0.26	-0.20	-0.12	-0.12	-0.13	-0.09	-0.09	-5.8	-4.6	-4.3	-3.2	-1.9	-1.7	-1.7	-1.3	-1.2
FR10	-0.22	-0.09	-0.10	-0.11	-0.10	-0.08	-0.05	-0.05	-0.07	-3.6	-1.6	-1.6	-1.8	-1.5	-1.2	-0.7	-0.7	-0.8
FR11	-0.42	-0.40	-0.41	-0.44	-0.47	-0.46	-0.52	-0.52	-0.48	-7.3	-6.8	-6.9	-7.0	-7.1	-6.7	-7.2	-7.1	-6.5
MR1	-0.21	-0.20	-0.22	-0.19	-0.22	-0.28	-0.24	-0.22	-0.25	-4.4	-4.0	-4.4	-3.6	-4.0	-4.8	-4.0	-3.7	-3.9
MR2	0.05	0.04	0.04	-0.05	0.13	-0.26	-0.23	-0.24	0.23	1.1	0.8	-0.8	1.0	-2.3	-4.4	-3.9	-3.9	-3.7
MR3	0.26	0.19	0.19	0.05	0.08	-0.09	-0.28	-0.28	-0.31	5.6	-4.0	-3.9	2.9	1.5	-1.6	-4.3	-4.5	-4.9
MR4	0.13	0.06	0.12	0.16	0.15	0.17	0.21	0.28	0.29	2.6	1.2	2.2	3.0	2.8	2.8	3.4	4.6	4.6
MR5	0.05	0.11	0.15	0.13	0.04	-0.05	-0.08	-0.15	-0.07	1.2	2.5	3.1	2.6	0.6	-0.8	-1.2	-2.1	-0.9
MR6	-0.13	-0.23	-0.34	-0.45	-0.90	-1.16	-1.40	-1.49	-1.64	-3.1	-5.1	-7.2	-8.8	-15.2	-17.9	-20.1	-20.8	-22.3
LBR1	0.13	0.17	0.22	0.21	0.24	0.28	0.34	0.41	0.41	2.6	3.4	4.3	4.0	4.3	4.9	5.9	6.8	6.8
LBR2	0.33	0.30	0.29	0.34	0.34	0.38	0.46	0.43	0.44	7.5	6.5	6.2	7.0	6.6	7.3	6.7	6.0	6.0
LBR3	-0.23	-0.15	-0.11	-0.11	-0.08	0.02	0.10	0.13	0.24	-5.5	-3.6	-2.5	-2.5	-1.8	0.5	2.1	2.6	4.8
BR1	-1.04	-0.64	-0.42	-0.14	0.08	0.13	0.13	0.11	0.13	-27.8	-16.9	-10.7	-3.5	1.9	2.6	2.8	2.3	2.6
BR2	-1.31	-1.21	-1.17	-1.10	-0.82	-0.23	-0.12	-0.24	-0.16	-36.2	-32.9	-31.3	-28.8	-20.4	-5.5	-2.7	-0.2	-3.3
BR3	-1.19	-1.14	-1.10	-1.00	-0.96	-0.87	-0.69	-0.60	-0.59	-31.4	-29.8	-28.6	-25.6	-23.8	-20.7	-16.0	-13.7	-13.3
SCh1	-0.21	-0.19	-0.17	-0.13	-0.14	-0.18	-0.19	-0.20	-0.19	-5.0	-4.5	-3.9	-3.1	-3.2	-3.9	-4.2	-4.2	-3.9
SCh2	-0.16	-0.12	-0.15	-0.12	-0.10	-0.14	-0.15	-0.13	-0.18	-3.6	-2.8	-3.2	-2.5	-2.1	-2.6	-3.1	-2.6	-3.4
SR	-0.15	-0.15	-0.15	-0.16	-0.15	-0.13	-0.18	-0.17	-0.18	-2.5	-2.6	-2.4	-2.4	-2.1	-1.9	-2.4	-2.3	-2.3
StbR	-0.09	-0.05	-0.11	-0.12	-0.11	-0.13	-0.15	-0.24	-0.25	-1.8	-0.9	-2.0	-2.2	-1.9	-2.0	-2.4	-3.5	-3.7

Table A-10 Delta (Project – Existing) D.O. Percentiles for Zones' Averages: Plan 6b, 2 ft deepening, No injections

Zone Name	Project - Baseline Difference (mg/l)									Project - Baseline Relative Difference (%)								
	1%	5%	10%	25%	50%	75%	90%	95%	99%	1%	5%	10%	25%	50%	75%	90%	95%	99%
FR1	-0.07	-0.08	-0.09	-0.08	-0.06	-0.08	-0.11	-0.10	-0.13	-1.6	-2.1	-1.9	-1.6	-1.4	-1.6	-2.2	-2.1	-2.5
FR2	0.00	-0.04	-0.06	-0.04	-0.06	-0.04	-0.07	-0.07	-0.08	0.1	-0.9	-1.3	-0.6	-1.2	-0.9	-1.5	-1.5	-1.5
FR3	-0.13	-0.08	-0.07	-0.05	-0.08	-0.11	-0.10	-0.20	-0.23	-3.1	-2.1	-1.6	-1.2	-1.7	-2.3	-2.0	-3.9	-4.4
FR4	-0.13	-0.12	-0.12	-0.11	-0.16	-0.25	-0.27	-0.26	-0.26	-3.1	-2.9	-2.8	-2.6	-3.5	-5.2	-5.1	-4.6	-4.4
FR5	-0.11	-0.15	-0.14	-0.14	-0.21	-0.30	-0.32	-0.21	-0.21	-2.6	-3.4	-3.2	-3.1	-4.3	-5.8	-5.6	-3.6	-3.4
FR6	-0.12	-0.16	-0.20	-0.23	-0.35	-0.39	-0.26	-0.18	-0.14	-2.9	-3.6	-4.4	-4.8	-7.0	-6.9	-4.3	-2.9	-2.2
FR7	-0.16	-0.21	-0.26	-0.30	-0.28	-0.15	-0.19	-0.23	-0.27	-3.4	-4.4	-5.3	-5.7	-4.6	-2.3	-2.6	-3.4	-3.9
FR8	-0.22	-0.31	-0.31	-0.33	-0.16	-0.14	-0.15	-0.21	-0.16	-4.3	-5.7	-5.6	-5.7	-2.5	-2.1	-2.2	-2.9	-2.2
FR9	-0.26	-0.19	-0.17	-0.14	-0.09	-0.09	-0.09	-0.08	-0.06	-4.5	-3.1	-2.8	-2.2	-1.3	-1.3	-1.2	-1.1	-0.8
FR10	-0.22	-0.10	-0.12	-0.12	-0.10	-0.10	-0.08	-0.05	-0.06	-3.7	-1.6	-2.0	-1.8	-1.5	-1.4	-0.8	-0.7	-0.8
FR11	-0.44	-0.42	-0.43	-0.46	-0.48	-0.47	-0.53	-0.53	-0.50	-7.7	-7.1	-7.2	-7.2	-7.3	-6.9	-7.3	-7.2	-6.7
MR1	-0.18	-0.17	-0.19	-0.17	-0.24	-0.25	-0.21	-0.19	-0.22	-3.7	-3.5	-3.8	-3.3	-4.3	-4.3	-3.5	-3.1	-3.5
MR2	0.00	0.01	0.05	0.11	-0.14	-0.26	-0.22	0.21	-0.19	0.0	0.2	1.6	-2.1	-2.3	-4.5	-3.7	-3.4	-3.1
MR3	0.13	0.09	0.09	0.02	-0.01	-0.18	-0.29	-0.31	-0.34	2.8	2.0	1.8	0.3	-0.2	-3.2	-4.7	-5.0	-5.3
MR4	-0.03	-0.10	-0.04	-0.01	0.04	0.03	0.00	0.07	0.09	-0.5	-1.9	-0.7	-0.3	-0.7	-0.4	0.0	1.2	1.5
MR5	-0.73	-0.69	-0.58	-0.52	-0.10	-0.10	-0.15	-0.16	-0.10	-17.3	-15.4	-12.5	-10.4	-1.7	-1.6	-2.2	-2.6	-1.4
MR6	1.62	1.49	1.42	1.31	0.68	0.38	0.12	0.01	0.18	39.0	33.1	29.3	25.8	11.2	5.8	1.7	0.1	-2.4
LBR1	-0.09	-0.06	-0.04	-0.02	-0.02	0.01	0.08	0.08	0.07	-1.9	-1.1	-0.7	-0.4	-0.3	0.1	1.4	1.3	1.2
LBR2	0.68	0.05	0.05	0.07	0.05	0.08	0.13	0.15	0.12	1.7	1.1	1.1	1.4	1.1	1.5	2.5	2.7	2.2
LBR3	-0.85	-0.78	-0.70	-0.62	-0.56	-0.39	-0.26	-0.21	-0.16	-20.4	-18.4	-16.3	-13.9	-11.9	-8.0	-5.3	-4.3	-3.1
BR1	-1.44	-0.92	-0.58	-0.26	0.07	0.13	0.13	0.12	0.14	-38.6	-24.0	-14.8	-6.4	1.5	2.9	2.9	2.6	2.8
BR2	-1.98	-1.84	-1.76	-1.58	-1.07	-0.34	-0.21	-0.29	-0.20	-54.8	-45.9	-47.2	-41.2	-26.6	-8.1	-4.7	-5.4	-4.3
BR3	-1.79	-1.73	-1.69	-1.64	-1.63	-1.59	-1.35	-1.28	-1.19	-47.4	-45.5	-44.1	-42.1	-40.1	-37.9	-31.4	-29.4	-26.9
SCh1	-0.17	-0.18	-0.17	-0.15	-0.15	-0.16	-0.19	-0.20	-0.19	-4.2	-4.2	-3.9	-3.4	-3.4	-4.0	-4.1	-4.3	-4.1
SCh2	-0.16	-0.12	-0.13	-0.13	-0.11	-0.13	-0.15	-0.13	-0.16	-3.5	-2.7	-2.9	-2.8	-2.2	-2.7	-3.1	-2.6	-3.1
SR	-0.15	-0.15	-0.15	-0.16	-0.15	-0.13	-0.16	-0.17	-0.16	-2.5	-2.6	-2.4	-2.5	-2.2	-1.9	-2.4	-2.3	-2.3
StbR	-0.05	-0.03	-0.06	-0.08	-0.08	-0.09	-0.13	-0.17	-0.20	-0.9	-0.5	-1.1	-1.4	-1.4	-1.4	-1.9	-2.6	-3.0



Figure A-1 Delta Bottom D.O. (50th percentile): Deepening and mitigation plan 6a-6ft



Figure A-2 Delta Bottom D.O. (50th percentile): Deepening and mitigation plan 6a-5ft

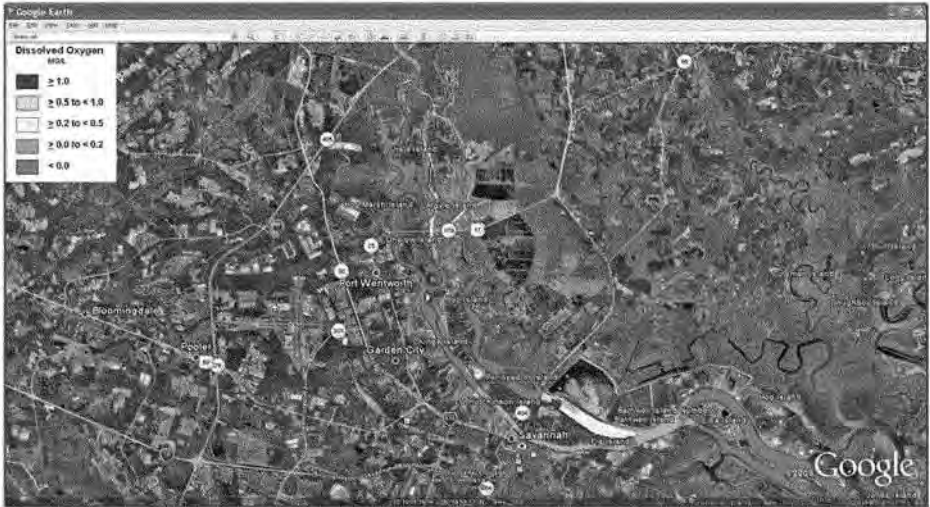


Figure A-3 Delta Bottom D.O. (50th percentile): Deepening and mitigation plan 6a-4ft



Figure A-4 Delta Bottom D.O. (50th percentile): Deepening and mitigation plan 6a-3ft



Figure A-5 Delta Bottom D.O. (50th percentile): Deepening and mitigation plan 6b-2ft

APPENDIX B

**DISSOLVED OXYGEN REGIME OF SAVANNAH ESTUARY:
AUGUST 1997 (AVERAGE FLOW), ALTERNATIVE DEEPENING WITH
MITIGATION PLANS 6A AND 6B,
D.O. DISCHARGE WITH MITIGATION PURPOSES**

TABLES AND FIGURES

Table B-1 Delta (Project – Existing) D.O. Percentiles for Critical Cells: Plan 6a, 6 ft deepening, and mitigation D.O. injections

Zone	Delta D.O. Percentile																	
	1%		5%		10%		25%		50%		75%		90%		95%		99	
	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%
FR1	0.07	1.8	0.06	1.5	0.05	1.2	0.06	1.4	0.03	0.7	0.04	0.9	0.01	0.2	-0.02	-0.4	0	0.0
FR2	0.18	4.9	0.17	4.5	0.15	3.9	0.18	4.5	0.17	4.0	0.14	3.2	0.12	2.6	0.13	2.8	-0.22	-4.3
FR3	0.26	7.4	0.23	6.4	0.27	7.4	0.3	7.8	0.29	7.2	0.43	10.0	0.28	5.8	0.54	10.7	0.35	8.3
FR4	0.28	8.0	0.26	7.9	0.38	10.5	0.29	7.4	0.34	8.4	0.43	9.8	0.2	4.0	0.3	5.6	0.48	8.7
FR5	0.53	14.6	0.57	15.2	0.54	13.9	0.52	12.7	0.56	13.0	0.33	6.7	0.14	2.6	0.08	1.6	0.19	3.3
FR6	0.58	15.7	0.67	17.8	0.72	18.5	0.63	15.3	0.73	17.1	0.5	10.5	0.06	1.1	0.08	1.4	0.1	1.7
FR7	0.51	12.2	0.55	12.9	0.6	13.9	0.47	10.2	0.29	5.8	0.26	4.3	0.04	0.6	0.19	3.0	0.25	3.9
FR8	0.27	5.8	0.24	5.0	0.08	1.6	-0.11	-2.0	-0.13	-2.1	-0.01	-0.2	0.03	0.4	0.04	0.6	-0.08	-1.1
FR9	0.66	13.5	0.87	17.3	0.74	13.9	0.66	11.5	0.41	6.5	0.38	5.8	0.47	6.9	0.58	8.0	0.69	9.6
FR10	1.83	42.5	1.55	32.4	1.49	30.1	1.48	27.4	1.11	18.8	0.84	13.1	1.04	15.6	0.77	11.0	0.69	9.6
FR11	-1.46	-35.0	-1.99	-42.3	-2.21	-44.8	-2.5	-47.7	-2.89	-51.0	-3.25	-52.9	-3.47	-53.4	-3.53	-53.2	-3.95	-55.4
MR1	0.37	8.4	0.4	8.8	0.42	9.1	0.32	6.5	0.26	5.0	0.08	1.4	0	0.0	0.03	0.5	0.04	-0.6
MR2	0.65	16.4	0.78	18.8	0.71	16.4	0.58	12.6	0.34	6.7	0.11	2.0	0.08	1.4	0.08	1.4	0.19	3.2
MR3	0.68	28.5	0.92	23.7	0.92	23.0	0.94	22.4	0.89	19.7	0.55	10.8	0.12	2.1	0.02	0.3	-0.01	-0.2
MR4	0.95	24.4	0.91	22.6	0.92	22.3	0.91	20.7	0.97	21.0	1.08	22.1	1.21	23.9	1.27	24.5	1.3	24.0
MR5	1.52	102.0	1.55	16.0	1.86	64.7	1.57	51.5	1.46	29.4	0.92	14.8	1	15.2	0.85	12.3	0.75	10.5
MR6	0.53	25.1	0.16	6.4	-0.35	-11.6	-0.81	-23.1	-2.8	-49.9	-3.34	-52.5	-3.54	-52.1	-3.67	-52.0	-3.83	-52.3
LBR1	1.24	34.7	1.07	24.6	1.1	23.2	1.06	20.7	1.02	18.8	1.2	21.3	1.13	18.9	1.12	18.2	1.17	18.1
LBR2	1.25	33.9	1.42	38.8	1.45	38.5	1.45	34.9	1.43	32.6	1.47	32.0	1.49	31.2	1.52	31.1	1.31	24.9
LBR3	0.25	6.7	-0.05	-1.5	-0.11	-3.2	-0.12	-3.3	-0.08	-2.0	0.14	3.2	-0.34	-7.2	-0.48	8.6	-0.58	-11.1
BR1	0.29	8.4	0.36	10.2	0.34	9.5	0.2	5.1	0.37	9.2	0.37	8.7	0.24	5.3	0.22	4.8	0.27	5.8
BR2	0.21	8.2	0.25	8.8	0.27	9.0	0.3	9.3	0.47	13.7	0.49	13.2	0.55	14.3	0.5	12.7	0.54	13.4
BR3	-0.06	-2.0	-0.17	-5.2	-0.26	-7.6	-0.31	-8.6	-0.06	-2.1	0.33	8.4	0.4	9.8	0.46	11.1	0.47	11.1
SCH1	-0.04	-1.7	0.08	3.1	0.11	4.1	0.13	4.6	0.23	7.8	0.6	17.6	0.51	13.5	0.56	14.4	0.48	11.6
SCH2	0.1	2.7	0.04	1.0	0.05	1.2	0.13	3.1	0.09	2.1	0.09	2.0	0.07	1.5	0.07	1.5	0.02	0.4
SR	1.45	30.9	1.51	31.8	1.48	29.8	1.52	28.6	1.44	25.6	1.37	22.9	1.66	27.7	1.75	28.4	1.79	28.6
StdR	0.2	5.2	0.42	10.0	0.31	6.8	0.39	7.7	0.27	4.7	0.15	2.4	0.13	2.0	0.07	1.1	0.12	1.8

Table B-2 Delta (Project – Existing) D.O. Percentiles for Critical Cells: Plan 6a, 5 ft deepening, and mitigation D.O. injections

Zone	Delta D.O. Percentile																	
	1%		5%		10%		25%		50%		75%		90%		95%		99	
	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%
FR1	0.05	1.3	0.06	1.5	0.05	1.2	0.07	1.7	0.03	0.7	0.02	0.4	0	0.0	-0.02	-0.4	-0.03	-0.8
FR2	0.16	4.4	0.15	4.0	0.14	3.6	0.16	4.0	0.15	3.6	0.14	3.2	0.1	2.2	0.11	2.3	-0.22	-4.3
FR3	0.23	6.6	0.19	5.2	0.23	6.3	0.24	6.2	0.21	5.2	0.24	5.6	0.19	4.0	0.5	9.9	0.5	5.4
FR4	0.23	6.6	0.24	6.7	0.29	8.0	0.21	5.4	0.23	5.7	0.22	5.0	0.03	0.6	0.16	3.0	0.45	8.2
FR5	0.49	13.5	0.58	15.5	0.58	14.9	0.54	13.2	0.64	14.8	0.44	9.0	0.19	3.5	0.26	4.6	0.32	5.5
FR6	0.46	12.5	0.45	12.0	0.41	10.5	0.38	9.2	0.37	8.7	0.21	4.4	-0.22	-3.9	-0.15	-2.6	-0.05	-0.8
FR7	0.6	14.4	0.85	15.3	0.7	16.2	0.69	15.0	0.82	16.3	0.35	5.9	0.4	6.4	0.57	9.0	1.07	16.5
FR8	0.1	2.1	0.11	2.3	0.04	0.8	0.12	2.2	0.11	1.8	0.3	4.7	0.27	4.0	0.26	3.8	0.17	2.4
FR9	0.4	8.2	0.66	13.1	0.56	10.5	0.65	11.4	0.49	7.8	0.52	7.9	0.62	9.1	0.68	9.4	0.67	9.3
FR10	1.88	43.2	1.59	33.3	1.57	31.7	1.53	28.8	1.17	19.8	0.91	14.2	1.1	16.5	0.84	12.0	0.75	10.4
FR11	-1.48	-35.0	-1.99	-42.3	-2.21	-44.8	-2.5	-47.7	-2.89	-51.0	-3.25	-52.9	-3.47	-53.4	-3.53	-53.2	-3.95	-55.4
MR1	0.18	4.1	0.17	3.8	0.2	4.3	0.2	4.1	0.21	4.1	0.02	0.4	0.01	0.2	0.07	1.2	0.17	2.7
MR2	0.73	18.1	0.76	18.3	0.65	15.0	0.54	11.7	0.32	6.3	0.08	1.4	0.13	2.2	0.15	2.5	0.19	3.2
MR3	1.05	28.6	1	25.7	0.97	24.3	1	23.9	0.95	21.0	0.63	12.4	0.18	3.2	0.1	1.7	0.03	0.5
MR4	1.05	27.0	1	24.8	1.02	24.8	1.01	23.0	1.09	23.6	1.23	25.2	1.35	26.7	1.43	27.6	1.45	26.8
MR5	1.67	112.1	1.74	85.3	1.67	89.3	1.72	56.4	1.53	32.6	1.15	18.5	1.24	18.9	1.06	15.4	1.01	14.2
MR6	0.53	25.1	0.16	6.4	-0.35	-11.6	-0.81	-23.1	-2.8	-49.9	-3.34	-52.5	-3.54	-52.1	-3.67	-52.0	-3.83	-52.3
LBR1	1.39	38.9	1.29	28.7	1.28	28.9	1.2	23.4	1.17	21.5	1.35	23.9	1.3	21.8	1.29	20.9	1.34	20.7
LBR2	1.62	43.9	1.59	41.2	1.58	40.1	1.57	37.7	1.57	35.8	1.6	34.8	1.66	34.8	1.67	34.2	1.48	28.1
LBR3	0.35	12.1	0.07	-2.1	0.03	0.9	0	0.0	0.07	1.8	-0.03	-0.7	-0.22	-4.7	-0.37	-7.4	-0.47	-9.0
BR1	0.21	6.1	0.28	8.0	0.28	7.8	0.13	3.3	0.31	7.7	0.33	7.8	0.19	4.2	0.17	3.7	0.23	4.9
BR2	0.31	12.2	0.21	7.4	0.2	6.7	0.23	7.1	0.41	11.9	0.42	11.4	0.48	12.5	0.46	11.7	0.5	12.4
BR3	0	0.0	-0.12	-3.7	-0.25	-7.3	-0.25	-6.9	-0.09	-2.4	0.28	7.1	0.35	8.6	0.4	9.6	0.42	9.9
SCH1	0.02	0.8	0	0.0	0.1	3.7	0.16	5.7	0.14	4.7	-0.04	-1.2	-0.07	-1.9	-0.05	-1.3	-0.19	-4.6
SCH2	0.08	2.1	0.02	0.5	0.04	1.0	0.08	1.9	0.07	1.6	0.09	2.0	0.07	1.5	0.06	1.3	0.07	1.5
SR	1.45	30.9	1.51	31.9	1.49	30.0	1.53	28.8	1.45	25.8	1.37	22.9	1.7	27.8	1.75	28.4	1.79	28.7
StdR	0.33	8.6	0.5	11.8	0.44	9.6	0.45	8.9	0.35	6.2	0.23	3.7	0.19	2.9	0.18	2.7	0.2	2.9

Table B-3 Delta (Project – Existing) D.O. Percentiles for Critical Cells: Plan 6a, 4 ft deepening, and mitigation D.O. injections

Zone	Delta D.O. Percentile																	
	1%		5%		10%		25%		50%		75%		90%		95%		99	
	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%
FR1	0.04	1.0	0.02	0.5	0	0.0	0.04	0.9	0.01	0.2	0.03	0.7	0.04	0.9	0	0.0	0.04	0.8
FR2	0.14	3.6	0.14	3.7	0.13	3.4	0.16	4.0	0.14	3.3	0.14	3.2	0.1	2.2	0.13	2.8	-0.21	-4.1
FR3	0.19	5.4	0.17	4.7	0.21	5.5	0.22	5.7	0.19	4.7	0.22	5.1	0.18	3.8	0.48	9.5	0.28	5.0
FR4	0.2	5.7	0.22	6.2	0.26	7.2	0.19	4.8	0.19	4.7	0.14	3.2	0.05	1.0	0.18	3.4	0.46	8.2
FR5	0.44	12.2	0.54	14.4	0.52	13.4	0.49	12.6	0.58	13.5	0.4	8.2	0.19	3.5	0.27	4.8	0.34	5.9
FR6	0.38	10.3	0.35	9.6	0.34	8.7	0.3	7.3	0.27	6.3	0.08	1.7	-0.18	-3.2	-0.05	-0.9	-0.02	-0.3
FR7	0.82	19.7	0.87	20.5	1.03	23.8	1.05	22.8	1.16	23.1	0.84	10.7	0.6	9.6	0.75	11.8	0.98	15.1
FR8	0.08	1.7	0.1	2.1	0.01	0.2	-0.14	-2.5	0.17	2.6	0.3	4.7	0.29	4.3	0.29	4.2	0.15	2.1
FR9	0.01	0.2	0.03	0.6	0.15	2.8	-0.25	-4.4	-0.1	-1.6	0.12	1.8	0.15	2.2	0.09	1.3	0.15	2.1
FR10	1.85	42.9	1.57	32.8	1.52	30.7	1.49	28.0	1.13	19.1	0.88	13.7	1.06	15.9	0.81	11.8	0.73	10.1
FR11	-1.46	-35.0	-1.89	-42.3	-2.21	-44.6	-2.5	-47.7	-2.89	-51.0	-3.25	-52.9	-3.47	-53.4	-3.53	-53.2	-3.95	-55.4
MR1	0.13	2.9	0.15	3.3	0.18	3.9	0.16	3.3	0.19	3.7	0	0.0	0.05	0.8	0.09	1.5	0.21	3.4
MR2	0.67	16.6	0.73	17.6	0.62	14.3	0.51	11.0	0.31	6.1	0.07	1.3	0.14	2.4	0.15	2.5	0.2	3.3
MR3	1.03	27.8	0.96	24.7	0.93	23.3	0.97	23.2	0.92	20.4	0.6	11.8	0.13	2.5	0.1	1.7	0.01	0.2
MR4	1.02	26.2	0.96	23.8	0.90	24.0	0.97	22.1	1.04	22.6	1.16	23.7	1.29	25.5	1.3	25.1	1.34	24.8
MR5	1.6	107.4	1.65	80.9	1.61	66.8	1.63	53.4	1.55	31.2	1.03	16.5	1.12	17.0	0.94	13.5	0.87	12.2
MR6	0.53	25.1	0.16	6.4	0.35	11.8	0.81	23.1	-2.8	-49.9	-3.34	-52.5	-3.54	-52.1	-3.67	-52.0	-3.83	-52.3
LBR1	1.28	35.9	1.28	29.0	1.18	24.8	1.11	21.6	1.09	20.1	1.27	22.5	1.21	20.3	1.2	19.5	1.23	19.0
LBR2	0.57	15.4	1.5	38.9	1.51	38.8	1.5	38.1	1.5	34.2	1.52	33.0	1.55	32.5	1.57	32.2	1.39	26.4
LBR3	0.32	11.1	0.01	0.3	-0.02	-0.6	-0.06	-1.6	-0.01	-0.3	-0.1	-2.3	-0.28	-5.9	-0.48	-8.2	-0.5	-9.5
BR1	0.16	4.6	0.2	5.7	0.21	5.8	0.06	1.5	0.28	6.9	0.31	7.3	0.16	3.5	0.14	3.0	0.2	4.3
BR2	-0.15	-5.9	0.12	4.2	0.13	4.3	0.14	4.3	0.35	10.2	0.39	10.5	0.44	11.5	0.43	10.9	0.46	11.4
BR3	-0.06	-2.0	-0.2	-6.1	-0.32	-9.3	-0.32	-8.8	-0.17	-4.5	0.23	5.8	0.3	7.4	0.36	8.7	0.36	8.5
SCH1	-0.05	-2.1	-0.07	-2.7	0.1	3.7	0.12	4.3	0.23	7.6	0.66	19.4	0.57	15.1	0.59	15.2	0.48	11.8
SCH2	0.07	1.9	-0.02	-0.5	0.04	1.0	0.09	2.2	0.07	1.6	0.09	2.0	0.08	1.7	0.09	1.9	0.07	1.5
SR	1.45	30.9	1.51	31.9	1.48	29.8	1.52	28.6	1.44	25.6	1.37	22.9	1.7	27.8	1.75	28.4	1.78	28.6
StBR	0.55	9.1	0.44	10.4	0.42	9.2	0.45	8.9	0.3	5.3	0.24	3.9	0.18	2.5	0.18	2.7	0.15	2.2

Table B-4 Delta (Project – Existing) D.O. Percentiles for Critical Cells: Plan 6a, 3 ft deepening, and mitigation D.O. injections

Zone	Delta D.O. Percentile																	
	1%		5%		10%		25%		50%		75%		90%		95%		99	
	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%
FR1	0.05	1.3	0.03	0.8	0.01	0.2	0.03	0.7	0.01	0.2	0.05	1.1	0.06	1.3	0.03	0.6	0.05	1.3
FR2	0.15	4.1	0.15	4.0	0.12	3.1	0.17	4.2	0.16	3.8	0.13	3.0	0.14	3.0	0.17	3.8	-0.18	-3.7
FR3	0.19	5.4	0.16	4.5	0.17	4.7	0.22	5.7	0.2	4.9	0.21	4.9	0.21	4.4	0.48	9.5	0.27	4.8
FR4	0.2	5.7	0.18	5.3	0.21	5.8	0.2	5.1	0.19	4.7	0.14	3.2	0.13	2.6	0.2	3.8	0.43	7.8
FR5	0.31	8.6	0.27	7.2	0.22	5.7	0.24	5.9	0.16	3.7	-0.13	-2.7	0.01	0.2	0.05	0.9	0.15	2.6
FR6	0.27	7.3	0.28	7.4	0.23	5.9	0.23	5.6	0.22	5.2	-0.01	-0.2	-0.05	-0.9	0.05	0.9	0.97	1.2
FR7	0.6	14.4	0.62	14.6	0.68	15.9	0.67	14.5	0.81	18.1	0.4	6.7	0.42	8.7	0.53	8.5	1.04	16.0
FR8	0.08	1.7	0.11	2.3	0.03	0.6	-0.08	-1.5	0.22	3.6	0.35	5.4	0.32	4.8	0.3	4.4	0.24	3.4
FR9	0.02	0.4	-0.03	-0.6	-0.1	-1.9	-0.15	-2.6	0.08	1.9	0.28	4.2	0.25	3.6	0.22	3.1	0.37	5.1
FR10	1.84	42.7	1.57	32.8	1.52	30.7	1.48	27.8	1.14	19.3	0.88	13.7	1.06	15.9	0.81	11.6	0.72	10.0
FR11	-1.46	-35.0	-1.89	-42.3	-2.21	-44.8	-2.5	-47.7	-2.89	-51.0	-3.25	-52.9	-3.47	-53.4	-3.53	-53.2	-3.95	-55.4
MR1	0.11	2.5	0.11	2.4	0.17	3.7	0.15	3.1	0.2	3.9	0.02	0.4	0.1	1.7	0.18	2.7	0.27	4.3
MR2	0.7	17.4	0.71	17.1	0.65	15.0	0.58	12.6	0.41	8.1	0.2	3.6	0.19	3.3	0.25	4.2	0.19	3.2
MR3	1.02	27.6	0.98	26.2	0.95	23.8	0.96	22.9	0.95	21.0	0.62	12.2	0.17	3.6	0.12	2.0	0.03	0.5
MR4	1.01	26.0	0.96	23.8	1	24.3	0.96	21.9	1.04	22.6	1.14	23.3	1.26	24.9	1.31	25.3	1.33	24.6
MR5	1.6	107.4	1.68	82.4	1.6	66.4	1.63	53.4	1.56	31.4	1.03	16.5	1.12	17.0	0.94	13.6	0.87	12.2
MR6	0.53	25.1	0.16	6.4	0.35	11.8	0.81	23.1	-2.8	-49.9	-3.34	-52.5	-3.54	-52.1	-3.67	-52.0	-3.83	-52.3
LBR1	1.26	35.3	1.27	29.2	1.2	25.3	1.1	21.4	1.09	20.1	1.27	22.5	1.21	20.3	1.2	19.5	1.23	19.0
LBR2	1.6	43.4	1.5	38.9	1.53	38.5	1.5	36.1	1.49	33.9	1.53	33.3	1.58	33.1	1.64	33.6	2.14	40.7
LBR3	0.33	11.4	0.02	0.6	0	0.0	-0.04	-1.1	0.02	0.5	-0.08	-1.4	-0.28	-5.9	-0.42	-8.4	-0.52	-9.9
BR1	0.12	3.5	0.19	5.4	0.19	5.3	0.04	1.0	0.24	6.0	0.29	6.8	0.15	3.3	0.13	2.8	0.19	4.1
BR2	0.16	7.1	0.07	2.5	0.09	3.0	0.12	3.7	0.31	9.0	0.36	9.7	0.41	10.7	0.39	9.9	0.44	10.9
BR3	-0.06	-2.0	-0.17	-5.2	-0.28	-8.1	-0.32	-8.8	-0.22	-5.8	0.04	1.0	0.12	2.9	0.16	3.9	0.23	5.4
SCH1	-0.09	-3.8	-0.07	-2.7	0.06	2.2	0.1	3.5	0.25	8.3	0.66	19.4	0.59	15.6	0.58	14.9	0.49	11.8
SCH2	0.1	2.7	0.04	1.0	0.08	2.0	0.07	1.7	0.07	1.6	0.07	1.6	0.04	0.9	0.05	1.1	0.06	1.2
SR	1.45	30.9	1.51	31.9	1.49	30.0	1.53	28.8	1.44	25.6	1.37	22.9	1.7	27.8	1.75	28.4	1.78	28.6
StBR	0.45	11.7	0.48	11.4	0.45	10.1	0.47	9.3	0.31	5.4	0.27	4.4	0.21	3.2	0.22	3.3	0.23	3.4

Table B-5 Delta (Project – Existing) D.O. Percentiles for Critical Cells: Plan 6b, 2 ft deepening, and mitigation D.O. injections

Zone	Delta D.O. Percentile																	
	1%		5%		10%		25%		50%		75%		90%		95%		99%	
	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%	mg/l	%
FR1	0.03	0.8	0.02	0.5	0	0.0	0.05	1.2	0.03	0.7	0.08	1.8	0.09	1.9	0.08	1.7	0.11	2.3
FR2	0.14	3.8	0.14	3.7	0.13	3.4	0.19	4.7	0.17	4.0	0.17	3.9	0.23	5.0	0.22	4.7	-0.08	-1.8
FR3	0.2	5.7	0.15	4.2	0.17	4.7	0.22	5.7	0.22	5.4	0.28	6.5	0.38	7.9	0.53	10.5	0.35	6.3
FR4	0.2	5.7	0.19	5.3	0.22	6.1	0.2	5.1	0.23	5.7	0.23	5.2	0.2	4.0	0.28	4.8	0.38	6.9
FR5	0.29	8.0	0.25	6.7	0.29	7.5	0.27	6.6	0.24	5.6	0.03	0.6	0.21	3.9	0.29	5.2	0.28	4.8
FR6	0.26	7.0	0.29	7.7	0.25	6.4	0.26	6.3	0.27	6.3	0.08	1.7	0.11	2.0	0.17	2.9	0.16	2.7
FR7	0.65	15.6	0.68	18.0	0.76	17.6	0.76	16.5	0.91	18.1	0.47	7.9	0.46	7.3	0.52	8.2	0.87	13.4
FR8	0.12	2.6	0.11	2.3	0	0.0	-0.07	-1.3	0.17	2.6	0.22	3.4	0.17	2.5	0.16	2.3	0.11	1.5
FR9	0.61	12.5	0.92	18.3	0.81	15.2	0.8	14.0	0.56	8.9	0.53	8.0	0.63	9.2	0.59	8.4	0.64	8.9
FR10	1.85	42.9	1.59	33.3	1.52	30.7	1.51	28.4	1.15	19.5	0.89	13.8	1.08	16.2	0.82	11.7	0.72	10.0
FR11	-1.46	-35.0	-1.99	-42.3	-2.21	-44.8	-2.5	-47.7	-2.89	-51.0	-3.25	-52.9	-3.47	-53.4	-3.53	-53.2	-3.95	-55.4
MR1	0.15	3.4	0.16	3.5	0.21	4.5	0.19	3.9	0.21	4.3	0.09	1.6	0.2	3.4	0.24	4.0	0.31	5.0
MR2	0.66	16.4	0.67	16.1	0.6	13.9	0.53	11.5	0.36	7.1	0.17	3.1	0.27	4.7	0.28	4.7	0.32	5.3
MR3	0.94	25.4	0.88	22.6	0.86	21.5	0.85	20.5	0.85	18.6	0.55	10.8	0.2	3.5	0.17	2.9	0.08	1.3
MR4	0.87	22.4	1.4	34.7	1.48	35.9	1.51	34.4	1.56	34.3	1.72	35.2	1.86	37.4	2.01	38.8	2.3	42.5
MR5	0.86	21.7	0.51	25.0	0.41	17.0	0.47	15.4	1.38	27.8	1.04	16.7	1.12	17.0	0.97	14.1	0.86	12.1
MR6	3.7	175.4	3.69	148.2	3.38	112.3	3.13	69.2	1.27	22.8	0.74	11.6	0.58	8.2	0.41	5.8	0.33	4.5
LBR1	0.53	14.8	0.71	16.3	0.65	20.0	0.9	17.5	0.86	15.8	1.04	18.4	1.05	17.6	1.05	17.0	1.23	16.0
LBR2	0.75	20.3	0.96	24.9	0.95	23.9	0.98	23.1	0.83	21.2	0.97	21.1	1	21.0	1.05	21.5	1.31	24.9
LBR3	0.28	-9.7	-0.54	-16.5	-0.67	-19.3	-0.66	-17.9	-0.66	-16.7	-0.67	-16.4	-0.62	-17.3	-0.65	-18.0	-1.08	-20.8
BR1	0.31	9.0	0.47	13.4	0.59	16.4	0.41	10.5	0.48	11.9	0.46	10.8	0.31	6.6	0.33	7.1	0.45	9.6
BR2	0.44	17.3	0.42	14.8	0.57	19.1	0.62	19.1	0.78	22.1	0.71	19.2	0.73	19.0	0.73	18.6	0.66	21.3
BR3	-0.44	-14.5	-0.57	-17.5	-0.66	-19.2	-0.67	-18.5	-0.25	-6.6	1.15	29.1	1.49	36.5	1.61	38.8	1.82	42.8
SCH1	0.04	1.7	0.02	0.8	0.08	3.0	0.1	3.5	-0.11	-3.7	-0.04	-1.2	-0.07	-1.9	-0.01	-0.3	-0.09	-2.2
SCH2	0.11	2.9	0.08	2.0	0.09	2.2	0.08	1.9	0.07	1.6	0.09	2.0	0.08	1.7	0.07	1.5	0.09	1.9
SR	1.45	30.9	1.51	31.9	1.48	29.8	1.52	28.6	1.44	25.6	1.37	23.9	1.7	27.8	1.75	28.4	1.78	28.6
StbR	0.54	14.1	0.58	14.0	0.5	10.9	0.52	10.3	0.37	6.5	0.29	4.7	0.28	4.0	0.26	3.9	0.3	4.4

Table B-6 Delta (Project – Existing) D.O. Percentiles for Zones' Averages: Plan 6a, 6 ft deepening, and mitigation D.O. injections

Zone Name	Project - Baseline Difference (mg/l)										Project - Baseline Relative Difference (%)									
	1%	5%	10%	25%	50%	75%	90%	95%	99%		1%	5%	10%	25%	50%	75%	90%	95%	99%	
FR1	0.10	0.08	0.08	0.12	0.09	0.07	0.04	0.04	0.00	2.3	1.8	1.7	2.6	1.9	1.4	0.9	0.8	0.1		
FR2	0.24	0.20	0.17	0.22	0.17	0.19	0.17	0.17	0.19	5.7	4.9	3.9	5.0	3.8	4.1	3.4	3.5	3.6		
FR3	0.21	0.24	0.25	0.26	0.26	0.22	0.21	0.15	0.09	5.2	5.9	6.0	6.4	5.8	4.6	4.2	2.9	1.7		
FR4	0.31	0.37	0.40	0.40	0.46	0.46	0.35	0.23	0.20	7.6	8.8	9.6	9.1	10.2	9.4	6.6	4.2	3.5		
FR5	0.42	0.45	0.50	0.46	0.50	0.32	0.13	0.06	0.12	10.2	10.6	11.6	10.2	10.6	8.2	2.4	1.0	2.0		
FR6	0.54	0.53	0.48	0.42	0.29	0.05	-0.06	0.03	0.06	12.9	12.3	10.6	8.9	5.8	0.8	-1.1	0.5	1.3		
FR7	0.37	0.31	0.26	0.19	-0.05	0.03	0.05	0.01	-0.03	8.0	6.5	5.3	3.5	-0.8	0.5	0.8	0.1	-0.5		
FR8	0.25	0.19	0.14	0.02	0.01	0.11	0.13	0.03	0.12	4.8	1.9	2.6	0.4	-0.2	1.7	1.9	-0.5	1.7		
FR9	-0.02	0.03	0.00	0.05	0.14	0.18	0.16	0.23	0.27	-0.4	0.4	0.0	0.8	2.1	2.5	2.2	3.1	3.6		
FR10	0.44	0.43	0.38	0.41	0.41	0.40	0.47	0.61	0.59	7.5	7.1	6.1	6.4	6.1	5.7	6.5	7.0	8.0		
FR11	0.48	0.43	0.42	0.39	0.39	0.32	0.40	0.42	0.46	8.3	7.4	7.0	6.1	5.3	4.6	5.5	5.8	6.2		
MR1	0.38	0.41	0.35	0.35	0.28	0.18	0.15	0.16	0.11	8.0	8.4	7.2	6.8	5.1	3.0	2.4	2.4	1.7		
MR2	0.57	0.57	0.50	0.46	0.37	0.22	0.17	0.15	0.18	12.3	11.9	10.1	8.6	6.7	3.7	2.9	2.4	2.9		
MR3	0.85	0.78	0.75	0.73	0.65	0.45	0.32	0.31	0.34	18.6	16.5	15.5	14.3	11.9	7.7	5.2	4.9	5.3		
MR4	0.75	0.74	0.75	0.79	0.77	0.81	0.81	1.02	1.01	15.1	14.4	14.4	14.6	13.7	13.8	14.9	16.6	16.2		
MR5	1.01	1.06	1.06	1.02	0.87	0.68	0.72	0.65	0.63	24.0	23.6	22.7	20.2	15.1	10.5	10.5	9.2	8.7		
MR6	0.08	-0.02	-0.12	-0.22	-0.70	-0.64	-1.25	-1.28	-1.36	1.8	-0.4	-2.5	-4.3	-11.9	-14.5	-18.0	-17.9	-18.5		
LBR1	0.91	0.87	0.91	0.91	0.93	0.97	1.11	1.12	1.13	19.0	17.4	18.0	17.2	16.8	17.0	18.9	18.7	18.6		
LBR2	1.05	1.01	1.01	1.06	1.05	1.09	1.22	1.22	1.22	23.6	22.1	21.7	21.9	20.7	20.9	23.1	22.6	22.2		
LBR3	0.43	0.55	0.58	0.60	0.64	0.77	0.88	0.94	1.07	10.4	12.9	13.5	13.5	13.5	15.8	17.9	18.7	21.2		
BR1	0.38	0.48	0.42	0.49	0.51	0.48	0.46	0.42	0.42	10.1	12.5	10.7	11.6	11.7	10.7	9.7	8.9	8.6		
BR2	0.37	0.38	0.39	0.39	0.41	0.55	0.59	0.43	0.41	10.2	10.4	10.3	10.2	10.1	13.2	13.5	9.4	8.7		
BR3	0.07	0.15	0.17	0.19	0.16	0.16	0.21	0.29	0.29	1.9	4.0	4.4	4.6	3.8	3.9	4.8	6.7	6.7		
SCH1	0.09	0.11	0.11	0.14	0.14	0.07	0.05	0.06	0.04	2.2	2.6	2.5	3.2	3.1	1.5	1.1	1.2	0.9		
SCH2	0.15	0.17	0.14	0.16	0.18	0.14	0.13	0.11	0.08	3.4	3.8	3.2	3.4	3.7	2.8	2.5	2.3	1.6		
SR	0.96	0.98	0.92	0.93	0.90	0.85	1.12	1.10	1.15	16.3	16.5	14.8	14.2	13.2	12.0	15.0	14.6	15.1		
StbR	0.26	0.34	0.31	0.27	0.25	0.19	0.15	0.09	0.07	4.9	6.4	5.6	4.7	4.1	3.0	2.4	1.3	1.1		

Table B-7 Delta (Project – Existing) D.O. Percentiles for Zones' Averages: Plan 6a, 5 ft deepening, and mitigation D.O. injections

Zone Name	Project - Baseline Difference (mg/l)									Project - Baseline Relative Difference (%)								
	1%	5%	10%	25%	50%	75%	90%	95%	99%	1%	5%	10%	25%	50%	75%	90%	95%	99%
FR1	0.08	0.07	0.06	0.09	0.07	0.05	0.03	0.02	0.00	1.9	1.5	1.4	2.0	1.5	1.2	0.6	0.5	0.1
FR2	0.22	0.19	0.16	0.19	0.15	0.18	0.14	0.14	0.14	5.3	4.4	3.7	4.3	3.4	3.8	2.9	2.8	2.8
FR3	0.18	0.21	0.20	0.23	0.22	0.17	0.16	0.08	0.01	4.4	5.2	4.8	5.3	4.9	3.8	3.3	1.5	0.2
FR4	0.23	0.26	0.31	0.29	0.29	0.24	0.12	0.06	0.03	5.7	8.2	7.3	6.6	6.4	4.9	2.3	1.1	0.6
FR5	0.29	0.30	0.33	0.30	0.30	0.12	-0.04	-0.02	0.01	7.0	7.0	7.8	6.7	6.3	2.4	-0.8	-0.3	0.2
FR6	0.29	0.28	0.28	0.22	0.11	-0.05	-0.11	0.06	0.12	6.9	6.6	6.6	4.6	2.3	-1.0	-1.8	1.0	1.9
FR7	0.20	0.14	0.12	0.04	-0.07	0.08	0.12	0.09	0.04	4.2	2.8	2.4	0.7	-1.2	1.4	1.8	1.3	0.6
FR8	0.14	0.01	0.04	-0.01	0.07	0.18	0.20	0.12	0.23	2.6	0.2	0.8	-0.3	1.1	2.8	3.0	1.7	3.2
FR9	-0.01	0.05	0.05	0.13	0.22	0.26	0.23	0.32	0.37	-0.2	0.9	0.8	2.0	3.3	3.8	3.2	4.3	5.0
FR10	0.54	0.52	0.49	0.61	0.50	0.50	0.57	0.63	0.72	9.2	8.6	7.9	7.9	7.6	7.3	7.9	8.6	8.8
FR11	0.63	0.58	0.56	0.55	0.50	0.46	0.56	0.60	0.64	11.1	10.0	9.4	8.6	7.6	6.8	7.7	8.3	8.7
MR1	0.22	0.27	0.28	0.29	0.28	0.20	0.20	0.19	0.18	4.7	5.6	5.5	5.6	5.1	3.3	3.3	3.1	2.8
MR2	0.53	0.56	0.49	0.48	0.40	0.28	0.24	0.21	0.24	11.4	11.6	10.0	9.2	7.3	4.6	3.9	3.4	3.6
MR3	0.89	0.86	0.82	0.82	0.73	0.52	0.40	0.39	0.45	19.5	18.2	16.9	16.0	13.4	8.9	6.5	6.3	7.1
MR4	0.86	0.86	0.88	0.88	0.88	0.92	1.01	1.13	1.16	17.4	19.7	18.4	16.4	15.5	15.7	16.7	16.5	18.6
MR5	1.13	1.18	1.18	1.12	1.01	0.80	0.86	0.80	0.80	28.9	26.3	25.3	22.3	17.5	12.4	12.7	11.8	11.1
MR6	0.11	0.01	0.10	-0.21	-0.88	-0.91	-1.22	-1.25	-1.31	2.6	0.2	2.1	-4.2	-11.6	-14.1	-17.5	-17.5	-17.8
LBR1	1.02	1.01	1.03	1.03	1.04	1.08	1.22	1.25	1.26	21.5	20.1	20.3	19.4	18.9	18.9	20.8	20.9	20.7
LBR2	1.16	1.13	1.14	1.10	1.16	1.20	1.34	1.33	1.38	26.2	24.7	24.5	24.1	23.0	23.0	25.3	24.7	25.2
LBR3	0.58	0.66	0.69	0.71	0.74	0.88	0.99	1.05	1.17	13.4	15.7	16.2	15.8	15.8	18.2	20.1	21.0	23.2
BR1	0.33	0.42	0.37	0.43	0.46	0.45	0.43	0.39	0.38	8.8	11.1	9.2	10.4	10.6	10.0	9.1	8.3	7.7
BR2	0.35	0.36	0.38	0.36	0.35	0.49	0.53	0.38	0.36	9.7	9.6	10.1	9.4	9.1	11.8	12.2	8.3	7.7
BR3	0.11	0.18	0.19	0.23	0.19	0.20	0.29	0.38	0.39	2.9	4.8	5.0	5.8	4.7	4.7	6.8	8.6	8.8
SCh1	0.07	0.09	0.09	0.12	0.11	0.07	0.06	0.06	0.05	1.6	2.2	2.0	2.8	2.5	1.5	1.3	1.3	1.2
SCh2	0.14	0.15	0.13	0.14	0.15	0.12	0.11	0.11	0.10	3.2	3.4	2.9	2.9	3.2	2.4	2.1	2.1	1.9
SR	1.17	1.20	1.12	1.12	1.10	1.05	1.37	1.36	1.41	19.9	20.1	18.2	17.2	16.3	14.5	18.4	18.0	18.5
StBr	0.36	0.39	0.35	0.31	0.29	0.25	0.21	0.16	0.18	6.9	7.4	6.4	5.4	4.8	4.0	3.3	2.4	2.6

Table B-8 Delta (Project – Existing) D.O. Percentiles for Zones' Averages: Plan 6a, 4 ft deepening, and mitigation D.O. injections

Zone Name	Project - Baseline Difference (mg/l)									Project - Baseline Relative Difference (%)								
	1%	5%	10%	25%	50%	75%	90%	95%	99%	1%	5%	10%	25%	50%	75%	90%	95%	99%
FR1	0.07	0.06	0.05	0.09	0.07	0.04	0.04	0.02	-0.02	1.6	1.4	1.1	2.1	1.6	0.9	0.7	0.4	-0.4
FR2	0.20	0.17	0.14	0.16	0.15	0.16	0.14	0.14	0.13	4.9	4.1	3.3	4.1	3.2	3.7	2.8	2.8	2.7
FR3	0.15	0.18	0.18	0.23	0.20	0.16	0.16	0.10	0.04	3.7	4.4	4.4	5.2	4.5	3.5	3.2	1.9	0.7
FR4	0.21	0.22	0.27	0.27	0.26	0.21	0.09	0.03	0.03	5.0	5.4	6.3	6.1	5.7	4.2	1.7	0.5	0.6
FR5	0.24	0.25	0.28	0.26	0.24	0.09	-0.04	0.04	0.05	5.7	5.9	6.6	5.7	5.1	1.8	-0.6	0.6	0.8
FR6	0.23	0.23	0.21	0.19	0.08	-0.05	-0.05	0.09	0.13	5.5	5.3	4.8	3.9	1.7	-0.9	-1.1	1.4	2.1
FR7	0.15	0.10	0.09	0.02	-0.05	0.11	0.13	0.08	0.05	3.3	2.1	1.9	0.4	-0.8	1.7	2.0	1.2	0.8
FR8	0.11	0.01	0.03	-0.02	0.09	0.19	0.18	0.15	0.17	2.2	0.1	0.5	-0.4	1.4	2.9	2.6	2.1	2.3
FR9	0.01	0.06	0.07	0.14	0.22	0.23	0.23	0.31	0.34	0.1	1.1	1.2	2.2	3.3	3.4	3.9	4.2	4.6
FR10	0.49	0.48	0.44	0.46	0.45	0.45	0.54	0.57	0.66	8.4	8.0	7.1	7.2	6.8	6.5	7.4	7.8	8.9
FR11	0.55	0.51	0.49	0.47	0.43	0.39	0.47	0.51	0.55	9.7	8.7	8.3	7.4	6.5	5.7	6.5	7.0	7.4
MR1	0.18	0.23	0.24	0.27	0.27	0.19	0.17	0.18	0.18	3.8	4.8	4.8	5.1	4.8	3.2	2.8	2.9	2.8
MR2	0.50	0.53	0.48	0.45	0.39	0.27	0.20	0.19	0.22	10.7	11.0	9.6	8.6	7.2	4.6	3.4	3.1	3.5
MR3	0.86	0.83	0.78	0.77	0.68	0.49	0.37	0.35	0.39	18.8	17.6	16.2	15.1	12.5	8.4	6.0	5.6	6.2
MR4	0.80	0.80	0.80	0.83	0.82	0.87	0.96	1.06	1.08	16.1	15.5	15.3	15.4	14.5	14.8	15.8	17.6	17.3
MR5	1.07	1.12	1.13	1.06	0.93	0.74	0.79	0.73	0.72	25.6	24.9	24.1	21.0	16.1	11.4	11.6	10.3	9.9
MR6	0.10	0.00	-0.11	0.22	0.69	-0.92	-1.24	-1.26	-1.34	2.5	0.0	-2.4	-4.2	-11.7	-14.2	-17.8	-17.7	-16.2
LBR1	0.95	0.93	0.97	0.96	0.98	1.03	1.16	1.16	1.19	20.0	18.6	19.0	18.1	17.6	18.0	19.8	19.8	19.7
LBR2	1.11	1.07	1.07	1.11	1.10	1.14	1.28	1.28	1.35	24.9	23.4	23.1	23.1	21.9	21.8	24.2	23.8	24.6
LBR3	0.51	0.62	0.65	0.67	0.69	0.83	0.94	1.00	1.12	12.4	14.7	15.2	14.6	14.7	17.0	19.1	19.8	22.3
BR1	0.27	0.37	0.32	0.38	0.43	0.42	0.40	0.37	0.38	7.2	9.6	8.0	9.2	10.0	9.3	8.5	7.8	7.8
BR2	0.28	0.30	0.32	0.30	0.31	0.45	0.49	0.34	0.33	7.7	8.2	8.5	7.9	7.8	10.7	11.3	7.4	7.0
BR3	0.06	0.13	0.15	0.18	0.15	0.16	0.26	0.34	0.35	1.5	3.3	3.8	4.6	3.7	3.8	5.9	7.8	7.9
SCh1	0.03	0.12	0.09	0.12	0.11	0.06	0.04	0.04	0.03	2.1	2.8	2.2	2.8	2.5	1.3	0.9	0.8	0.6
SCh2	0.11	0.14	0.11	0.12	0.15	0.12	0.10	0.11	0.09	2.5	3.1	2.5	2.6	3.1	2.5	2.0	2.2	1.7
SR	1.06	1.09	1.02	1.03	1.00	0.95	1.24	1.23	1.28	18.1	18.3	16.8	15.7	14.8	13.4	16.7	16.3	16.8
StBr	0.36	0.37	0.31	0.29	0.26	0.24	0.20	0.15	0.14	7.0	6.9	5.7	5.1	4.6	3.8	3.1	2.3	2.1

Table B-9 Delta (Project – Existing) D.O. Percentiles for Zones' Averages: Plan 6a, 3 ft deepening, and mitigation D.O. injections

Zone Name	Project - Baseline Difference (mg/l)									Project - Baseline Relative Difference (%)								
	1%	5%	10%	25%	50%	75%	90%	95%	99%	1%	5%	10%	25%	50%	75%	90%	95%	99%
FR1	0.08	0.06	0.07	0.09	0.07	0.05	0.03	0.02	-0.02	1.7	1.4	1.5	2.0	1.5	1.0	0.7	0.3	-0.5
FR2	0.19	0.17	0.14	0.19	0.15	0.18	0.14	0.16	0.14	4.7	4.1	3.3	4.2	3.2	3.9	2.9	3.1	2.9
FR3	0.14	0.18	0.18	0.23	0.20	0.17	0.16	0.15	0.10	3.4	4.3	4.3	5.2	4.5	3.6	3.7	2.9	1.8
FR4	0.19	0.21	0.22	0.24	0.22	0.19	0.11	0.09	0.08	4.6	5.0	5.3	5.5	4.9	3.9	2.1	1.6	1.5
FR5	0.21	0.20	0.24	0.23	0.19	0.10	0.00	0.11	0.11	5.0	4.7	5.6	5.1	4.1	2.0	0.0	1.8	1.8
FR6	0.17	0.18	0.17	0.15	0.08	0.03	0.03	0.16	0.19	4.0	4.1	3.8	3.2	1.5	0.0	0.5	2.6	3.0
FR7	0.13	0.08	0.08	0.03	0.02	0.17	0.15	0.15	0.06	2.8	1.7	1.6	0.6	0.4	2.6	2.2	2.2	1.3
FR8	0.11	0.03	0.05	0.01	0.14	0.21	0.20	0.13	0.25	2.1	0.5	1.0	0.2	2.3	3.2	2.9	1.8	3.5
FR9	0.05	0.12	0.13	0.18	0.24	0.25	0.27	0.32	0.37	0.9	1.9	2.2	2.8	3.7	3.7	3.6	4.4	4.9
FR10	0.49	0.47	0.44	0.46	0.45	0.45	0.53	0.57	0.65	8.4	7.6	7.1	7.2	6.8	6.5	7.3	7.7	8.6
FR11	0.55	0.51	0.50	0.47	0.43	0.39	0.47	0.51	0.55	9.7	8.7	8.3	7.4	6.5	5.6	6.5	7.0	7.4
MR1	0.16	0.22	0.23	0.27	0.29	0.23	0.20	0.22	0.18	3.3	4.4	4.5	5.2	5.2	3.8	3.4	3.6	2.9
MR2	0.50	0.57	0.50	0.48	0.42	0.30	0.24	0.21	0.26	10.7	11.9	10.1	9.2	7.6	5.1	4.0	3.4	4.1
MR3	0.86	0.85	0.80	0.79	0.69	0.50	0.38	0.36	0.38	19.3	17.9	16.5	15.4	12.8	8.6	6.2	5.8	6.0
MR4	0.80	0.79	0.80	0.82	0.81	0.87	0.95	1.06	1.07	16.2	15.3	15.2	15.1	14.4	14.8	15.6	17.3	17.2
MR5	1.08	1.11	1.13	1.05	0.93	0.74	0.79	0.73	0.72	25.6	24.6	24.1	21.1	15.1	11.5	11.6	10.2	9.9
MR6	0.11	0.01	-0.11	-0.22	-0.70	-0.92	-1.24	-1.26	-1.33	3.8	0.2	-2.3	-4.4	-11.7	-14.2	-17.8	-17.7	-18.1
LBR1	0.95	0.93	0.87	0.97	0.97	1.02	1.16	1.18	1.20	19.9	18.6	19.1	18.2	17.7	17.9	19.7	19.8	19.7
LBR2	1.11	1.07	1.07	1.13	1.10	1.15	1.26	1.27	1.30	24.9	23.4	23.0	22.9	21.8	22.1	24.1	23.6	23.6
LBR3	0.52	0.63	0.66	0.67	0.70	0.82	0.94	1.00	1.13	12.6	14.9	15.4	15.0	14.8	17.0	19.0	20.1	22.4
BR1	0.25	0.34	0.26	0.35	0.41	0.42	0.39	0.37	0.37	6.6	6.9	7.1	8.6	9.5	9.2	8.4	7.7	7.6
BR2	0.25	0.27	0.29	0.28	0.28	0.42	0.47	0.32	0.31	6.8	7.3	7.7	7.3	7.0	9.9	10.7	7.0	6.6
BR3	0.02	0.11	0.13	0.16	0.15	0.15	0.26	0.35	0.35	0.6	2.9	3.3	4.2	3.6	3.7	6.0	6.1	8.0
Sch1	0.05	0.08	0.08	0.11	0.10	0.05	0.02	0.02	0.02	1.2	2.0	1.9	2.8	2.2	1.1	0.5	0.5	0.5
Sch2	0.11	0.13	0.12	0.13	0.15	0.12	0.11	0.10	0.09	2.5	3.0	2.6	2.8	3.2	2.4	2.2	2.0	1.8
SR	1.06	1.09	1.02	1.03	1.00	0.95	1.24	1.23	1.28	18.1	18.3	16.6	15.7	14.8	13.4	16.7	16.3	16.8
StbR	0.38	0.38	0.34	0.30	0.31	0.29	0.23	0.21	0.20	7.2	7.2	6.2	5.2	5.1	4.6	3.6	3.1	2.9

Table B-10 Delta (Project – Existing) D.O. Percentiles for Zones' Averages: Plan 6b, 2 ft deepening, and mitigation D.O. injections

Zone Name	Project - Baseline Difference (mg/l)									Project - Baseline Relative Difference (%)								
	1%	5%	10%	25%	50%	75%	90%	95%	99%	1%	5%	10%	25%	50%	75%	90%	95%	99%
FR1	0.07	0.06	0.05	0.07	0.08	0.07	0.05	0.03	-0.01	1.7	1.3	1.2	1.6	1.7	1.4	1.0	0.5	-0.2
FR2	0.21	0.18	0.15	0.20	0.17	0.20	0.16	0.21	0.22	5.0	4.2	3.6	4.4	3.7	4.3	3.7	4.3	4.4
FR3	0.15	0.18	0.19	0.24	0.23	0.21	0.24	0.26	0.24	3.7	4.3	4.5	5.5	5.2	4.4	5.0	4.9	4.5
FR4	0.20	0.22	0.24	0.26	0.26	0.25	0.23	0.23	0.20	4.8	5.3	5.8	6.0	5.7	5.2	4.3	4.1	3.5
FR5	0.23	0.23	0.26	0.26	0.23	0.19	0.14	0.21	0.21	5.4	5.5	5.9	5.7	4.9	3.6	2.4	3.5	3.5
FR6	0.21	0.20	0.21	0.20	0.15	0.10	0.17	0.23	0.25	4.9	4.7	4.6	4.3	2.9	1.7	2.8	3.7	4.0
FR7	0.18	0.14	0.14	0.11	0.13	0.22	0.20	0.17	0.14	4.0	3.0	2.7	2.0	2.1	3.6	3.0	2.6	2.0
FR8	0.19	0.09	0.14	0.11	0.23	0.25	0.24	0.19	0.27	3.7	1.7	2.5	1.9	3.7	3.8	3.5	2.7	3.7
FR9	0.14	0.19	0.25	0.26	0.30	0.30	0.31	0.34	0.38	2.4	3.3	4.0	3.9	4.5	4.3	4.3	4.6	5.1
FR10	0.50	0.48	0.45	0.48	0.46	0.46	0.54	0.58	0.67	8.4	8.0	7.2	7.4	6.9	6.7	7.5	7.8	9.0
FR11	0.55	0.51	0.49	0.47	0.43	0.39	0.47	0.52	0.55	9.6	8.7	8.2	7.4	6.4	5.7	6.5	7.1	7.4
MR1	0.21	0.27	0.27	0.32	0.29	0.26	0.25	0.25	0.22	4.4	5.6	5.3	6.0	5.2	4.4	4.1	4.1	3.5
MR2	0.59	0.56	0.47	0.46	0.42	0.28	0.24	0.22	0.26	12.1	11.7	9.5	8.7	7.6	4.8	3.9	3.6	4.2
MR3	0.81	0.73	0.74	0.70	0.63	0.45	0.31	0.30	0.25	17.7	15.3	15.3	13.7	11.5	7.6	5.0	4.8	3.9
MR4	0.72	0.65	0.69	0.69	0.68	0.71	0.79	0.87	0.94	14.5	12.5	13.1	12.7	12.1	12.1	12.9	14.3	15.0
MR5	0.54	0.58	0.60	0.64	0.79	0.72	0.77	0.73	0.70	12.9	12.6	12.9	12.8	13.6	11.1	11.3	10.2	9.6
MR6	2.00	1.85	1.69	1.54	0.90	0.51	0.27	0.20	0.07	46.1	41.1	35.0	30.3	15.3	7.8	3.9	2.9	0.9
LBR1	0.75	0.74	0.75	0.75	0.73	0.73	0.86	0.87	0.86	15.8	14.8	14.8	14.2	13.3	12.8	15.0	14.6	14.2
LBR2	0.85	0.81	0.82	0.82	0.80	0.83	0.94	0.98	0.96	19.1	17.6	17.7	17.1	15.8	15.9	17.7	16.1	17.6
LBR3	-0.09	0.01	0.07	0.13	0.24	0.42	0.55	0.60	0.72	-2.1	0.2	1.5	2.8	5.0	8.6	11.1	12.0	14.3
BR1	0.60	0.63	0.57	0.52	0.49	0.50	0.46	0.44	0.43	16.2	16.6	14.4	12.5	11.5	11.0	9.9	9.3	8.9
BR2	0.68	0.72	0.74	0.76	0.74	0.76	0.71	0.56	0.53	18.9	19.5	19.8	19.9	18.4	16.1	16.2	12.2	11.3
BR3	-0.11	-0.05	-0.02	0.10	0.08	0.10	0.13	0.17	0.21	-2.9	-1.3	-0.5	2.4	2.1	2.3	2.9	4.0	4.6
Sch1	0.09	0.10	0.09	0.11	0.10	0.05	0.04	0.04	0.04	2.2	2.5	2.3	2.6	2.3	1.2	0.8	0.9	0.8
Sch2	0.13	0.15	0.13	0.14	0.16	0.13	0.12	0.12	0.11	2.9	3.3	2.8	2.9	3.4	2.7	2.5	2.4	2.2
SR	1.06	1.09	1.02	1.03	1.00	0.95	1.25	1.23	1.28	18.1	18.3	16.6	15.7	14.8	13.4	16.7	16.3	16.8
StbR	0.40	0.41	0.38	0.34	0.34	0.31	0.26	0.24	0.23	7.7	7.8	6.9	6.0	5.5	4.9	4.4	3.6	3.4

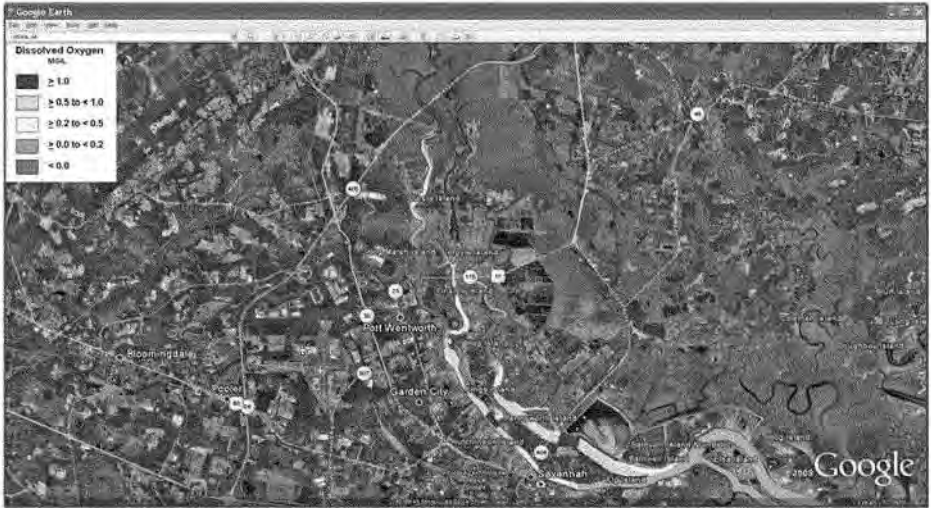


Figure B-1 Delta D.O. (50th percentile): Mitigation plan 6a-6ft and D.O. discharge



Figure B-2 Delta D.O. (50th percentile): Mitigation plan 6a-5ft and D.O. discharge



Figure B-3 Delta D.O. (50th percentile): Mitigation plan 6a-4ft and D.O. discharge

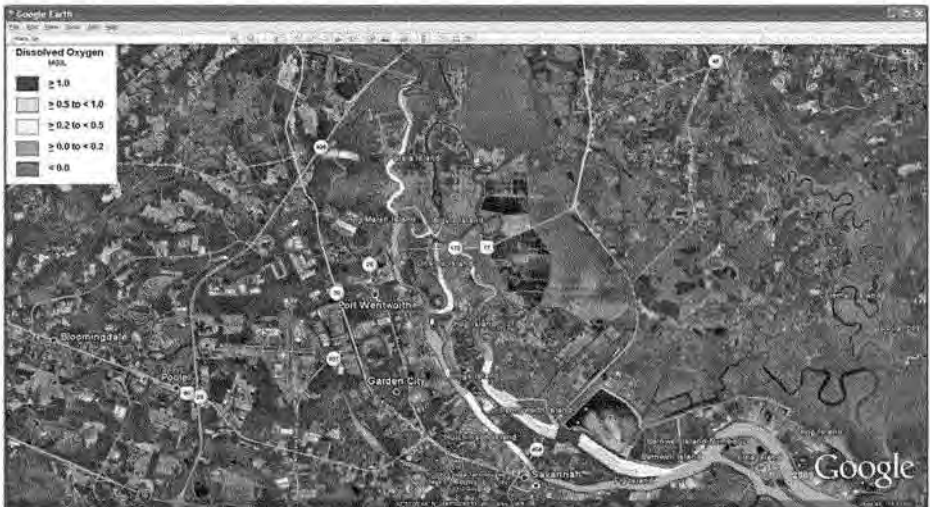


Figure B-4 Delta D.O. (50th percentile): Mitigation plan 6a-3ft and D.O. discharge



Figure B-5 Delta D.O. (50th percentile): Mitigation plan 6b-2ft and D.O. discharge

APPENDIX C**DISSOLVED OXYGEN MITIGATION RESULTS FOR OXYGEN
IMPROVEMENT SYSTEMS LOCATED NEAR INTERNATIONAL PAPER
AND GEORGIA PACIFIC****TABLES**

Table C-1 Mitigation success for facilities located near IP and GP: 1BL criteria, 5th percentile

Vertical Layer	DEPTH ALTERNATIVE				
	44-foot	45-foot	46-foot	47-foot	48-foot
Surface	98.9	99.8	99.8	99.8	99.8
Mid-Depth	93.3	98.4	98	98.1	98.2
Bottom	97.2	97.1	97.5	97.3	97
Water Column	97.6	99.9	99.9	99.9	99.9

Table C-2 Mitigation success for facilities located near IP and GP: 1BL criteria, 10th percentile

Vertical Layer	DEPTH ALTERNATIVE				
	44-foot	45-foot	46-foot	47-foot	48-foot
Surface	99.5	99.7	99.7	99.7	99.7
Mid-Depth	93.5	98.5	97.9	98	98.1
Bottom	97.4	98.1	97.3	97.3	98.6
Water Column	97.5	99.9	99.9	99.9	99.9

Table C-3 Mitigation success for facilities located near IP and GP: 1BL criteria, 25th percentile

Vertical Layer	DEPTH ALTERNATIVE				
	44-foot	45-foot	46-foot	47-foot	48-foot
Surface	99.9	99.8	99.9	99.9	99.9
Mid-Depth	94.5	98.7	98.4	98.3	98.5
Bottom	97	98.5	97.3	98.1	98.4
Water Column	97.7	99.9	99.9	99.9	99.9

Table C-4 Mitigation success for facilities located near IP and GP: 1BL criteria, 50th percentile

Vertical Layer	DEPTH ALTERNATIVE				
	44-foot	45-foot	46-foot	47-foot	48-foot
Surface	99.7	99.7	99.6	99.6	99.6
Mid-Depth	95.3	98.4	97.2	97.8	98
Bottom	97.8	98.8	97.4	97.3	97
Water Column	98.2	99.9	99.9	99.9	99.9

Table C-5 Mitigation success for facilities located near IP and GP: 3BL criteria, 5th percentile

Vertical Layer	DEPTH ALTERNATIVE				
	44-foot	45-foot	46-foot	47-foot	48-foot
Surface	99.3	98	98	98.4	99.2
Mid-Depth	94	94.5	94.5	96.2	95.1
Bottom	96.9	93.9	92.3	95.1	96.4
Water					
Column	98	99.9	99.8	99.8	99.7

Table C-6 Mitigation success for facilities located near IP and GP: 3BL criteria, 10th percentile

Vertical Layer	DEPTH ALTERNATIVE				
	44-foot	45-foot	46-foot	47-foot	48-foot
Surface	99.5	98.1	98.3	98.6	99.1
Mid-Depth	94.3	94.9	94.7	95.9	95.4
Bottom	96.6	95.2	95	95.1	95.9
Water					
Column	98	99.9	99.8	99.8	99.9

Table C-7 Mitigation success for facilities located near IP and GP: 3BL criteria, 25th percentile

Vertical Layer	DEPTH ALTERNATIVE				
	44-foot	45-foot	46-foot	47-foot	48-foot
Surface	99.8	98.6	98.9	99	99.9
Mid-Depth	94.9	95.9	95.9	96.6	96.5
Bottom	95.8	94.7	94.3	94.3	94.7
Water					
Column	98.4	99.7	99.6	99.5	99.9

Table C-8 Mitigation success for facilities located near IP and GP: 3BL criteria, 50th percentile

Vertical Layer	DEPTH ALTERNATIVE				
	44-foot	45-foot	46-foot	47-foot	48-foot
Surface	99.7	99.2	98.9	99.1	99.6
Mid-Depth	96.2	95.7	94.4	95	95.7
Bottom	96.9	94.4	93.1	94	93.5
Water					
Column	98.8	99.3	98.8	98.9	98.9

APPENDIX D**SAVANNAH ENHANCED MODEL (SHEP) POSTPROCESSOR**

The post-processor for Savannah enhanced hydrodynamic and water quality model (WAMS) is a stand-alone program that can read EFDC and WASP output files (BMD files) and generate required outputs in specific formats for impact analysis. The GUI of the current version of the postprocessor is presented on Figure D-1.

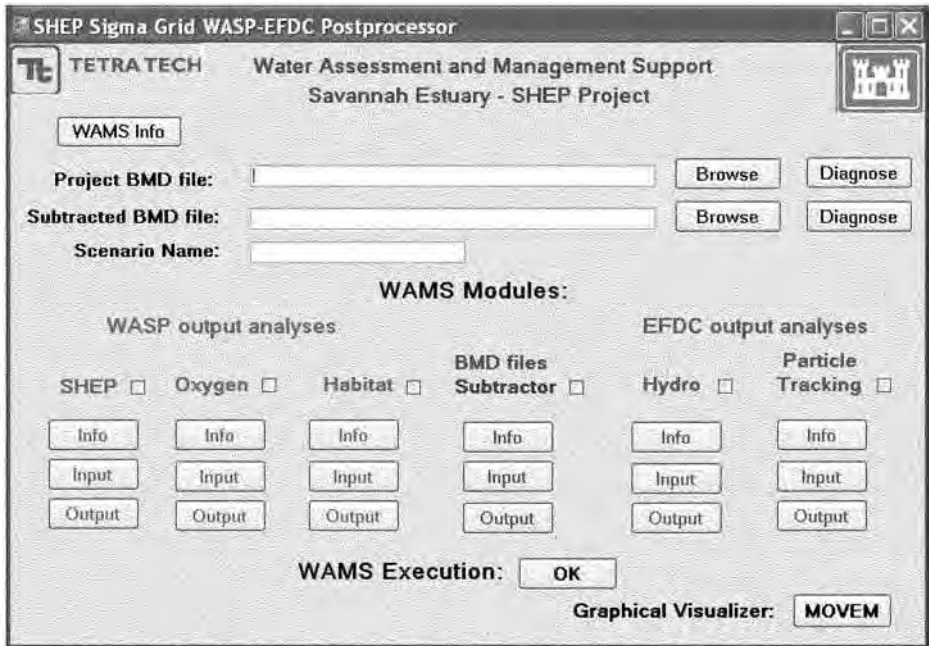


Figure D1 WASP-EFDC postprocessor for models developed for SHEP project

The module “Oxygenation” was developed for identification of parameters of dissolved oxygen improvement system and evaluation of effectiveness of SHEP mitigation measures.

The modified postprocessor outputs information for the following harbor’s spatial objects:

- Critical Cell – the cell with lowest D.O. concentrations during specified simulation period
- Critical Segment – an assemblage of cross section cells located at the critical cell’s j-coordinate
- Zone – an assemblage of cells that is limited by specified horizontal and vertical boundaries

The basic criteria for assessing the success of D.O. mitigation is the condition of meeting existing (pre-project) or higher values of D.O. concentrations for 97% of the estuarine waters at least. WAMS provides estimates of such waters volume for all user’s selected zones.

The postprocessor outputs the results of hydrodynamic and water quality simulations as a set of following files with tables:

1. File name: <Oxygen\Tables\><Scenario name><Mitigation success.CSV>. The tables contain the percentage of volume that meets 97% requirement for all cells of selected zones, all zones and the whole estuary for 1st, 5th, 10th, 25th, 50th, 75th, 95th, and 99th percentiles of D.O. concentrations,

2. File name: <Oxygen\Tables><Scenario name><_CriticCell_DO_%.CSV>. The table contains D.O. percentiles distribution for a cell with lowest D.O. concentrations inside each zone. The information allows purposefully focusing the mitigation measures on most critical parts of the zones.
3. File name: <Oxygen\Tables><Scenario name><_CriticCell_Sal_%.CSV>. The table contains salinity percentiles distribution for each zone's critical cell. It helps to identify salinity impact on formation of lowest D.O. concentrations inside each zone.
4. File name: <Oxygen\Tables><Scenario name><_C_DO_Viol.CSV>. The table contains percentage of simulation records with D.O. standards' violations for each cell of the computational grid during the simulation period:

$$A_i^k = \frac{100}{N_t} \sum_{t=1}^{N_t} \delta_{it}^k,$$

$$\delta_{it}^k = 1, \text{ if } C_{it} \geq S^k; \delta_{it}^k = 0, \text{ if } C_{it} < S^k$$

where A_i^k is a number of violations of the k -th D.O. standard S^k for i -th cell; C_{it} is the D.O. concentration in i -th cell for t -th record; N_t is the number of time records in BMD WASP output file

5. File name: <Oxygen\Tables><Scenario name><_C_DO_Viol_Analys.CSV>. The table contains numbers of cells that correspond to deciles of the cumulative distribution function of numbers of violation of D.O. standards

$$G_j^k = \sum_{i=1}^{N_c} Z_{ij}^k, \quad j = 1, \dots, 10$$

$$\text{if } (j-1) \cdot 10 < A_i^k \leq j \cdot 10 \quad Z_{ij}^k = 1, \text{ otherwise } Z_{ij}^k = 0,$$

where G_j^k is the number of cells with k -th standard violation within a range of j and j -1 deciles; N_c is the number of cells in the computational grid.

6. File name: <Oxygen\Tables><Scenario name><_C_Viol_WC_Volume.CSV>. The table contains percentage of water volumes with violations of D.O. standards through the water column of each specified zone

$$B_m^k = \frac{\sum_{t=1}^{N_t} \sum_{n=1}^{N_v} \sum_{i=1}^{N_m} V_{in} \delta_{int}^k}{\sum_{t=1}^{N_t} \sum_{n=1}^{N_v} \sum_{i=1}^{N_m} V_{in}}, 100\%$$

$$\delta_{int}^k = 1, \text{ if } C_{in} \geq S^k; \delta_{int}^k = 0, \text{ if } C_{in} < S^k$$

where N_v is the maximum number of vertical layers; N_m is the number of horizontal cells in a zone m ; V_{in} is the volume of a cell with coordinates (i, n) at time t .

7. File name: <Oxygen\Tables><Scenario name><_C_Viol_WL_Volume.CSV>. The table contains percentage of water volume with violations of D.O. standards for each specified zone and selected vertical layers

$$B_m^k = \frac{\sum_{i=1}^{N_t} \sum_{n=N_k}^{N_e} \sum_{t=1}^{N_m} V_{ijn} \delta_{ijn}^k}{\sum_{i=1}^{N_t} \sum_{n=N_k}^{N_e} \sum_{t=1}^{N_m} V_{ijn}} \cdot 100$$

$$\delta_{ijn}^k = 1, \text{ if } C_{ijn} \geq S^k; \delta_{ijn}^k = 0, \text{ if } C_{ijn} < S^k$$

where N_k and N_e are the beginning and ending of vertical n -coordinates for zone m ; V_{ijn} is the volume of a cell with coordinates (i, j, n) at time t .

8. File name: <Oxygen\Tables\><Scenario name><_CriticSeg_DO_A_TS.CSV>. The table contains time series of 1-, 7-, and 30-day average D.O. for each critical segment's water column, and it's top and bottom halves
9. File name: <Oxygen\Tables\><Scenario name><_CriticSeg_Sal_A_TS.CSV>. The table contains time series of 1-, 7-, and 30-day average salinity for each critical segment's water column, and it's top and bottom halves
10. File name: <Oxygen\Tables\><Scenario name><_Z_DO_%.CSV>. The table contains volume-weighted D.O. percentiles distributions for each zone and specified vertical layers
11. File name: <Oxygen\Tables\><Scenario name><_Z_Sal_%.CSV>. The table contains volume-weighted salinity percentiles distributions for each zone and specified vertical layers
12. File name: <Oxygen\Tables\><Scenario name><_Z_DO_Viol.CSV>. The table contains percentages (F_m) of occurrences of D.O. standards violations by each zone's volume-weighted D.O.

$$R_{tm} = \frac{\sum_{i=1}^{N_m} \sum_{n=N_k}^{N_e} V_{ijn} C_{ijn}}{\sum_{i=1}^{N_m} \sum_{n=N_k}^{N_e} V_{ijn}}$$

$$F_m = \frac{100\%}{N_t} \sum_{i=1}^{N_t} \delta_{tm}^k$$

$$\delta_{tm}^k = 1, \text{ if } R_{tm} \geq S^k; \delta_{tm}^k = 0, \text{ if } R_{tm} < S^k,$$

where R_{tm} is the volume-weighted D.O. concentration for zone m and time record t .

13. File name: <Oxygen\Tables\><Scenario name><_Z_DO_Mass.CSV>. The table contains D.O. deficit in reference to the current D.O. minimum standard St_4 ; average deficit over simulation period – D_m , as well as maximum instant D.O. deficit and time of this event for each specified zone

$$D_m = \frac{1}{N_t} \sum_{i=1}^{N_t} \sum_{n=N_k}^{N_e} \sum_{t=1}^{N_m} (S^k - C_{ijn})$$

The tables (items 10 – 13) contain information about each selected zone volume-weighted D.O. and salinity concentrations' averages and their correspondence to D.O. standards. The information allows estimating the contribution of each zone into the general pattern of D.O. regime of the estuary.

APPENDIX E**ECO2 QUOTATION ON SPEECE CONE ON MARCH 17, 2010**

Eco2 quotation included below.



3/17/2010
Savannah Harbor, Oxygen Injection
ECO2 SuperOxygenation
Preliminary design & budget estimate
Steven Davis, Submitted by Eco Oxygen Technologies
Oxygen supply by on site oxygen generation PSA

Design Operating Conditions		units			
Oxygen Supply	lbs / day		5,000		
Electrical Unit Cost	\$ / kwhr		\$0.06		
Annual Usage	days		180		
ECO2 System Design and Capital Cost		units	quantity	rate	cost
ECO2 cone with PLC oxygen flow control	12 ft. Dia.		1	\$748,474	\$748,474
Oxygen dissolution	4,000 lbs / day		1	4,000	
Side Stream Flow	12,600 gpm		1	12,600	
Sub total					\$748,474
Outsourced/3rd party Capital Cost		units	quantity	rate	cost
Installation (including side stream pump)			1	\$250,000	\$250,000
Oxygen Generator (PSA)	5,000 lbs / day		1	\$170,000	\$170,000
Sub total					\$420,000
Annual Operating Cost		units	quantity	rate	cost
Electrical draw - Oxygen Generator	1,815 kwhr / day		1	\$0.06	\$19,600
Electrical draw - Side Stream Pump	75 hp		1	\$0.06	\$14,500
O&M - Oxygen Generator & Side Stream Pump				20%	\$6,800
License fee - ECO2 process technology	4,000 lbs / day		1	\$0.01	\$7,200
Sub total					\$48,100
Total Capital Cost Estimate including Onsite Oxygen Generation					\$1,168,474
Total Annual Operating Cost Estimate (180 days)					\$48,100

Notes:

The cost estimate for installation, side stream pump and oxygen generation equipment need to be validated.

Cost estimates valid for 30 days and do not include taxes or shipping

Cost estimates subject to verification of design data

Purchase subject to Terms & Conditions of Purchase Agreement and Process Technology License Agreement.

ECO Oxygen Technologies
3939 Priority Way South Drive, Suite 400, Indianapolis, IN 46240
Tel: 317-706-6484 Fax: 317-816-0940 www.eco2tech.com

E. Groundwater/Aquifer

1. Memorandum. Resource Agency Meeting on Supplemental Aquifer Studies. SHEP. Meeting held on 25 October 2002 in Savannah District.
2. Memorandum. Resource Agency Meeting on Supplemental Aquifer Studies. SHEP. Meeting held on 12 March 2004 in Savannah District.
3. Memorandum. Resource Agency Meeting on Supplemental Aquifer Studies. SHEP. Meeting held 8 October 2004 in Savannah District.

1. Memorandum for Record concerning the "Savannah Harbor Expansion Project – Chloride Data Analysis and Model Development" dated November 15, 2006. Memorandum for Record dated 10 January 2007 and revised 13 February 2007. From Joseph T. Hoke, PE, Hydraulic Engineer, Reviewed by Greg Williams, PE, Chief, Coastal, Hydrology and Hydraulics Section, and Approved by Wayne Bissette, PE, Chief, Wilmington Regional Engineering Center.

Memorandum
Resource Agency Meeting
on
Supplemental Aquifer Studies
Savannah Harbor Expansion Project

A meeting was held on 25 October, 2002 at the office of the Savannah District, US Army Corps of Engineers to obtain input from two state and one federal agency regarding proposed additional studies relating to potential impacts to the Floridan aquifer as a result of the proposed Savannah Harbor Expansion Project (SHE).

The following persons attended the meeting:

Bill McLemore – GAEPD (GGS)
Camille Ransom - SCDHEC
John Clarke – USGS, Georgia District
Mark Maimone – Camp Dresser & McKee
John Cox – Applied Technology & Management
Doug Plachy – USACE, Savannah District
Cardwell Smith - USACE, Savannah District

The meeting began at 1300 with Mr. Smith introducing Mr. Maimone to the other attendees and explaining that the purpose of the meeting was based on the Corps' desire to coordinate with other state and federal agencies, to keep them informed of Corps plans, and to receive input relative to proposed supplemental studies. It is felt that if these agencies are involved in the study process they will be better informed when and if their approval authority is required for the project.

Mr. Smith then spent about an hour presenting a summary of project related background and studies performed to date. Following the presentation there was a period of general discussion on proposed project elements and how studies associated with the on-going Georgia Sound Science Initiatives might relate to supplemental studies for SHE.

Discussion was then focused on a Savannah District (USACE) draft proposal for additional aquifer-related studies. Mr. Smith re-iterated that Savannah District's ultimate goal was to acquire sufficient data to produce an appropriate EIS for potential project-related impacts to the aquifer.

Additional discussion was held on USACE's desire to have an Independent Technical Review (ITR) of project studies. A similar review of Georgia Sound Science Initiative studies was mentioned by Dr. McLemore and Mr. Clarke and possible review panel members were discussed.

The following action items resulted from the meeting:

1. Mr. Maimone was asked to provide written comments to Savannah District on the meeting and the proposed USACE study plan.
2. Mr. Clarke was asked to provide a proposal and cost estimate for USGS to provide technical assistance and review of project elements, particularly those related to ground-water modeling and GIS data.
3. Mr. Smith will forward Mr. Maimone's comments to the other attendees for review and comment. When final comments are received, Mr. Smith will compile and forward them to the other attendees.
4. Mr. Smith will begin contacting potential Independent Reviewers.
5. Mr. Smith will keep GAEPD, USGS and SCDHEC informed on proposed project study preparations and schedules.

It was decided that project coordination will be maintained via e-mail and telephone, and additional meetings will only be held as needed.

The meeting concluded about 1615.

CARDWELL SMITH, P.G.
Geology, Hydrogeology and HTRW Design Section

Memorandum
Resource Agency Meeting
on
Supplemental Aquifer Studies
Savannah Harbor Expansion Project

A meeting was held on 12 March, 2004 at the office of the Savannah District, US Army Corps of Engineers to update GAEPD, SCDHEC and USGS (Georgia and SC Districts) on recent progress and findings regarding supplemental studies relating to potential impacts to the Floridan aquifer as a result of the proposed Savannah Harbor Expansion Project (SHE).

The following persons attended the meeting:

Bill McLemore – GAEPD (GGS)
 Camille Ransom - SCDHEC
 John Clarke – USGS, Georgia District
 Jim Landmeyer – USGS, South Carolina District
 Mark Maimone – Camp Dresser & McKee
 Paul Hossain – Camp Dresser & McKee
 John Cox – Applied Technology & Management
 Mackie McIntosh - USACE, Savannah District
 Robert O'kelley - USACE, Savannah District
 Cardwell Smith - USACE, Savannah District

The meeting began at 1000 with Mr. Smith introducing Mr. Hossain and Ms. McIntosh to the other attendees and explaining that the purpose of the meeting was to update the attendees on progress and findings to date, obtain feedback on the findings and discuss any potential changes that may be needed in the remainder of the proposed work.

Mr. Smith then spent about an hour presenting a summary of project related background and previous studies, as well as the findings of recent work. Particular emphasis was placed on the recent supplemental paleochannel seismic survey and the paleochannel/confining layer pore water investigation.

The seismic survey appears to have produced some exceptional data on paleochannels. Over 60 miles of survey were completed predominately in the area between Fields Cut and Tybee Island.

Pore water data collection is progressing well and it appears that the data will be very useful in the calibration of the model.

Following the presentation there was a period of general discussion on the progress of supplemental project elements and thoughts on any potential changes that might be warranted, based on findings to date. It was decided that one of the remaining channel borings, which have been focused in paleochannel areas, should be located in an area between two paleochannels to allow comparison of the pore water profiles below paleochannels with a profile below a non-paleochannel area.

Channel borings should be completed within the next few weeks and land borings are expected to begin soon thereafter. Construction details of the nested wells to be installed after land core borings are completed were discussed, and the consensus seems to lean toward using conventional 4-inch wells versus single installation multi-port wells.

After lunch, discussion was focused on data needs for the 3-D ground-water model that Mr. Maimone and Mr. Hossain (CDM) are working on. Mr. Hossain has been working with the USGS (Mr. Clarke's office) to develop the database for the model. CDM will use the GIS layering and hydraulic properties of the USGS Hilton Head/Savannah models as the basis for the Savannah Harbor model, combined with more recent USACE harbor-specific data in the immediate project area.

The following action items resulted from the meeting:

1. Mr. Smith and Ms. McIntosh will continue compiling and updating project data to be provided to CDM for the model.
2. CDM will continue with development of the model database and begin model calibration.
3. USACE will continue to keep GAEPD, USGS and SCDHEC informed on project findings.

Project coordination will continue to be maintained via e-mail and telephone, and additional meetings will be held as needed.

The meeting concluded about 1515.

CARDWELL SMITH, P.G.
Geology, Hydrogeology and HTRW Design Section

Memorandum

**Resource Agency Meeting
on
Supplemental Aquifer Studies
Savannah Harbor Expansion Project**

A meeting was held on 8 October, 2004 at the office of the Savannah District, US Army Corps of Engineers to update GAEPD, SCDHEC and USGS (Georgia and SC Districts) on recent progress and findings regarding supplemental studies relating to potential impacts to the Floridan aquifer as a result of the proposed Savannah Harbor Expansion Project (SHE).

The following persons attended the meeting:

Bill McLemore – GAEPD (GGS)
Camille Ransom - SCDHEC
John Clarke – USGS, Georgia District
Jim Landmeyer – USGS, South Carolina District
Mark Maimone – Camp Dresser & McKee
John Cox – Applied Technology & Management
Mackie McIntosh - USACE, Savannah District
Matthew Delano- USACE, Savannah District
Cardwell Smith - USACE, Savannah District

The meeting began at 0900 with Mr. Smith welcoming the other attendees and explaining that the purpose of the meeting was to update the attendees on progress and findings to date, obtain feedback on the findings and discuss any potential changes that may be needed in the remainder of the proposed work.

Mr. Smith then spent about an hour presenting the findings of recent work. Particular emphasis was placed on the supplemental paleochannel seismic survey and the latest data from the paleochannel/confining layer pore water investigation.

Data from the 60+ miles of seismic survey have allowed various profile sections and fence diagrams to be constructed of the paleochannel areas between Fields Cut and Tybee Island.

Pore water data collection along the Savannah Harbor channel is nearing completion and the data suggests that distinctive pore-water chloride (salinity) “profiles” exist through the surficial and confining unit sediments above the limestone of the upper Floridan aquifer.

Following the pore-water data presentation, Mr. Maimone spent about 30 minutes presenting the conceptual approach and construction of the 3-D solute-transport ground-water model CDM is working on. He explained that the modeling objectives were to:

- Develop a modeling tool to explore aquifer system response;
- Assess the full range of plausible aquifer responses to harbor dredging; and
- Provide information on expected impacts of dredging on Upper Floridan Aquifer water quality (worst case, most likely, best case).

The model will make use of data from regional USGS aquifer investigations and models and will replicate USGS model layering, properties, boundaries, and pumping conditions, but the model grid structure will focus on the Savannah Harbor channel.

The next step for the model will be to run various simulations to:

- Test the model's ability to simulate existing conditions;
- Test range of Miocene Kv (rate of salt water penetration, impact on heads);
- Test range of Miocene Confining Unit Thicknesses;
- Test range of values for porosity and storativity; and
- Examine feasibility of pump test

After lunch, Mr. Ransom gave a presentation on recent work SCDHEC has done regarding saltwater intrusion using GIS to map the results of analytical flow and transport calculations within the area of influence of the drawdown cone of depression created by pumping from the Floridan aquifer in the Savannah area.

The area within the "0" contour of the drawdown cone was divided into 4-square mile grid cells. A spreadsheet with analytical equations was used to calculate flow and transport values for each grid cell, based on heads, confining unit thickness and confining unit hydraulic properties. The resultant values were then contoured in a GIS to reveal areas that might be expected to be of concern regarding saltwater intrusion.

Following Mr. Ransom's presentation, Dr. Landmeyer presented several slides representing some initial work he has done on the analysis of pore-water samples from the upper Floridan confining unit, regarding the possible role of diffusion in the movement of pore-water through the confining unit.

A general discussion was then held on all of the presentations and the status of the SHE supplemental work. Mr. Smith noted that nested wells are presently being installed in the confining unit and surficial sediments near the Floridan well at SHE-10. These multi-level wells will be used to confirm potentiometric heads in these units. Ground-water samples for chlorides may also be taken from the wells.

The nested multilevel wells intended to be installed near the GGS Floridan wells on Hutchinson Island (across the river from IP) have been held up waiting on right-of-entry from CSX. Pore-water samples from the surficial and confining unit will also be collected at this location.

Nested wells may also be installed at the far western end of Cockspur Island (Ft. Pulaski) on property owned by GADOT.

The following action items resulted from the meeting:

1. Mr. Smith and Ms. McIntosh will continue installing nested wells and compiling sample data as it is received from the labs.
2. CDM will begin running simulations with the model and will prepare for a presentation on the model at an upcoming SEG Aquifer Committee meeting on 29 October.
3. USACE will continue to keep GAEPD, USGS and SCDHEC informed on project findings.

Project coordination will continue to be maintained via e-mail and telephone, and additional meetings will be held as needed.

The meeting concluded about 1530.

CARDWELL SMITH, P.G.
Geology, Hydrogeology and HTRW Design Section

F. Mitigation Plans

1. MFR dated 14 July 2006 and revised 24 July 2006, Meeting to Screen Mitigation Options.
2. E-MAIL from William G. Bailey dated 6 April 2007, SHEP, Wetlands Interagency Coordination Team – Wetland Mitigation Report
3. E-MAIL from William G. Bailey dated 19 March 2008, SHEP, Impacts to Striped bass
4. E-MAIL from William G. Bailey dated 19 March 2008, SHEP, Impacts to Shortnose sturgeon
5. E-MAIL from William G. Bailey dated 01 October 2010, SHEP, Fish bypass structure at New Savannah Bluff Lock & Dam

CESAM-PD-E

14 July 2006
Revised: 24 July 2006

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Summary of 12 July meeting to screen mitigation options

1. Participants:

COE:	Joe Hoke; John Hazelton; Beth Williams; Bill Bailey
USFWS:	Ed EuDaly; John Robinette
GA DNR-WRD	Matt Thomas; Tim Barrett
Tetra Tech	Steve Davie

Observers:

GPA	Hope Moorer; Larry Keegan
-----	---------------------------

2. The following is a summary of the discussion and does not include all the comments that were made.

4. I gave a brief introduction of the purpose of the meeting – to screen down the individual mitigation options to a manageable number so the hydraulic modelers could continue their efforts. I explained that the individual options would be combined to create mitigation plans. To accomplish that, the Corps would rank the options by their perceived cost-effectiveness. The present target number for different mitigation plans is five. We would run each of those five plans through the impact models (fisheries, water quality and wetlands) with the various channel depths. That procedure would allow us to identify what features are justified to mitigate for impacts from each channel depth alternative. There are additional potential mitigation measures which are being considered separately that do not require hydraulic modeling. These could be added to any mitigation plan to reduce impacts to a specific resource (wetlands, sturgeon, etc.).

5. John Hazelton presented a spreadsheet (attached) that shows the various mitigation measures that the modelers evaluated. The options were listed in the spreadsheet in the order that the modeling had been performed, not necessarily their effectiveness. John also distributed a group of figures, one for each mitigation option. The figures show a model output for an option – surface salinity; 50% exceedence; roughly between Old Fort Jackson and I-95. Each of the model runs used the same input conditions (average year river flows during the summer months; 48-foot channel alternative); the only difference is the mitigation option being considered.

We explained that we used salinity because that parameter is a major factor in identifying changes to several resources -- wetlands, fisheries and water quality. We selected surface salinity because that is the parameter that the Interagency Wetland Coordination Team is using to identify impacts to wetlands. Ed EuDaly expressed a desire to see also the results in terms of bottom salinity. We explained that the surface salinity is all that we have available to review at this meeting. We acknowledged that additional information may be gained by looking at other parameters. However, when we began the model runs, the Corps determined that since the Back / Little Back / Middle River areas are so shallow that no substantial salinity stratification occurs. This assessment is supported by information developed during the model development period.

During the meeting we used the convention of breaking Back River into two segments. We called the portion upstream of US 17 the Little Back River. The portion downstream of that highway we called Back River. I will continue that convention throughout this MFR.

We reviewed that previous interagency discussions identified the Back River, Little Back River, and Middle River areas as being more ecologically important at this point in time than the Front River along the City. The City Front area has already been extensively impacted by development and high salinity levels. Areas further upriver, but below I-95, still contain the intertidal wetlands which are so biologically diverse.

6. The group reviewed the mitigation options as they appeared on the list, observing the effects that they had on reducing salinity impacts from a channel deepening and sometime resulting in improvements beyond what presently occur at a site. Although we did not quantify the effectiveness of each option, we visually observed the number of grid cells that the option changes, the amount of change of specific cells, and the geographic location of the change. Each of these of these attributes is a component of identifying the ecological "effectiveness" of a potential change to the system. Using what John had developed as a base, I prepared a spreadsheet (attached) that consolidates the major comments and conclusions that the group had on the effectiveness of each mitigation option.

On the Sediment Basin options, the depths shown with the fill are in NGVD. Options with just a sill increase salinity just upstream, apparently due to momentum and turbulence over the sill. Options with a sill plus fill substantially reduce salinity in Back River. There group identified that there may be potential water quality concerns with filling the area behind a sill. A possibility would be to let the area fill in by itself. Waiting for the natural filling would delay the beneficial effects the design would have on salinity in Back River. The Corps will probably pursue filling the area behind the sill so that the beneficial effects of the design would be received as soon as possible. The Corps may consider filling less than the entire basin to potentially reduce impacts to O&M of the harbor. We would consult with Mike Wutkowski to determine how well the basin would function if its length were reduced.

On the Rifle Cut option, the group recognized that this cut is very important in the flow dynamics of the system. We should not alter it without being certain of the results. We could possibly retain it as a measure to implement as an adaptive management feature after the initial construction is complete and some monitoring has been conducted.

Concerning a diversion structure at McCoys Cut, the group recognized that some structure would probably be necessary to ensure that improved channels just downstream do not shoal, reducing their effectiveness. Adjustments to this structure could be needed once construction is complete and some monitoring performed. This could be conducted as adaptive management.

Concerning the depth of the rivers just downstream of McCoys Cut, the group agreed that a greater depth is not necessarily better. Too great a depth could lead to excessive shoaling in the area. Velocity is important to both shoaling and in establishing good habitat for Striped bass.

On the Steamboat River options, these would be major changes to the system we should not alter this area without being certain of the results.

The results of the discussion were identification of the measures as the most effective potential mitigation options. These are shown in the following table. Some options were combined if that would be needed for the overall action to be a functional and complete unit – such as providing an alternate opening when the mouth of a river is plugged.

MITIGATION COMBINATION	MITIGATION OPTION
A	Opening New Cut & Closing Middle River
B	Opening New Cut & Closing Middle River Rerouting flow through Steamboat River Stabilizing Houston Cut Plugging Drakes Cut
C	Deepening McCoys Cut (4.0 M in upper arm and 3.0 m in lower two arms) Diversion structure at upper end (entrance to Savannah River)
C-1	Deepening McCoys Cut (4.0 M in upper arm and 3.0 m in lower two arms) Diversion structure at upper end (entrance to Savannah River) Modifying Rifle Cut
D	Fill Sediment Basin to depth of 3.85 m (submerged structure at lower end)
E	Fill Sediment Basin to depth of 3.85 m (submerged structure at lower end) Remove Tidegate (structure down to sill, including abutments)

7. Before the full modeling work begins, the Corps will first conduct the following three analyses:
 - Review the model performance related to New Cut and Middle River modifications. Ensure the model grid connections are correct and that the model results are reliable. Once we determine the results are reliable, reassess whether those flow modifications provide the types and level of salinity changes that we generally expect those changes to make. If the changes are not substantial, we would reassess whether these options should be included in the final array of mitigation options that we evaluate further as mitigation plans. If we find that the reliable results for these two options differ from what was presented at this meeting, we will send the new results to the agencies for information.
 - Identify the effectiveness of combination C-1. This would allow us to see whether adding Rifle Cut to measure C substantially reduces salinity impacts to the system. If modifying Rifle Cut is

found to be noticeably effective, we would proceed using that combination of measures (C-1) and not pursue the measures described above as combination C.

- Identify the effectiveness of combination E. This would allow us to see whether removing the restriction of the Tidegate structure substantially reduces salinity impacts to the system. If removing the restriction of the Tidegate structure is found to be noticeably effective, we would proceed using that combination of measures (E) and not pursue the measures described above as combination D.

8. Prior to the meeting I had developed preliminary cost estimates for several mitigation options that we were considering. Although EN has not yet completed the rough-order-of-magnitude (ROM) cost estimates for the mitigation options, some engineering information is available for these measures. Using recent local construction costs and percentages for other components such as contingencies (40%), E&D and S&A (12%), I developed preliminary cost estimates so that we could judge the comparative cost-effectiveness of the various final mitigation measures (A through E). The construction costs and percentages were applied uniformly to all of the measures, to keep from distorting the costs of individual measures. The estimates I developed were for comparative purposes only. We will use the ROM estimates that EN prepares when we select the best mitigation plan for each depth alternative. With the cost information I had prepared, I assigned the following costs to the final mitigation options:

MITIGATION COMBINATION	COMPARATIVE COST
A	\$ 17 million
B	\$ 87 million
C	\$ 15 million
C-1	\$ 15+ million
D	\$ 9 million
E	\$ 15 million

9. Using this information and the effectiveness which we had previously discussed, we then ranked the combinations according to their cost effectiveness.

MITIGATION PLAN	MITIGATION COMBINATION	COMPARATIVE COST
1	C	\$ 15 million
2	C + D	\$ 24 million
3	C + D + A	\$ 41 million
4	C + D + A + E	\$ 47 million
5	C + D + A + E + B	\$117 million

The Corps will use the combinations identified in the ranking as mitigation plans and conduct our future analyses on those mitigation plans. Those analyses will include quantification of impacts to the various resources (fisheries, water quality and wetlands) for each of the various channel depth alternatives. When those analyses are complete, we will select the most appropriate mitigation plan to accompany each channel depth alternative. The Corps and agencies will then use the impact information in their decisions concerning those depth alternatives.

10. The Corps agreed to send the bottom salinity information to Ed EuDaly for the various mitigation options that EN had evaluated prior to the meeting.

11. The Corps will display the results of its initial analyses of these mitigation plans in the same format we reviewed at this meeting. We will provide those results to the agencies for their information. That format may or may not be included in the EIS, as we will display the information in formats that the agencies previously been identified by as being needed for them to make decisions on the project.

// ss //

William Bailey
Environment & Resources Branch

From: Bailey, William G SAM@SAS
To: "Kelie Moore@coastal.dnr.state.ga.us"; "Keith_Parsons@mail.dnr.state.ga.us"; "Matt Thomas (E-mail)"; "Wade Cantrill"; "backhaic@dhec.sc.gov"; "Curtis Joyner (lowrermv@dhec.sc.gov)"; "Priscilla H Wendt (wendt@dnc.sc.gov)"; "Kay Davy (kay.davy@noaa.gov)"; "Ed Eudalv@fws.gov"; "john_robinette@fws.gov"; "Lord.Bob@epamail.epa.gov"; "Ted Bisterfeld (bisterfeld.ted@epa.gov)"
Cc: "Jane Gness@fws.gov"; "kitchensw@wec.ufl.edu"; "kajumba.ntale@epamail.epa.gov"; "kirklaq@dhec.sc.gov"; "PRESTOHS@dhec.sc.gov"; "Pace Wilber"; "Brad_Gane@dnr.state.ga.us"; "Jeff_Larson@dnr.state.ga.us"; "Ed Durcan"; Garrett, Thomas A SAS; Hoke, Joseph T SAW@SAS; "hmoorer@gsports.com"; "Larry Keegan@ch2m.com"; Bradley, Kenneth P SAM; Heine, Hugh SAW; Small, Daniel I SAD; Barnett, Dennis W SAD
Subject: Savannah Harbor Expansion Project: Wetlands Interagency Coordination Team -- Wetland Mitigation Report
Date: Friday, April 06, 2007 1:52:50 PM
Attachments: SHE-wetland_mitigation_report_4-5-07-INTRO---.pdf

Here is some revised summary information and an explanation concerning the Wetland Mitigation Report we set out last week.

Bill Bailey

-----Original Message-----

From: Williams, Laura E (Beth) SAW@SAS
 Sent: Friday, April 06, 2007 11:01 AM
 To: Bailey, William G SAM@SAS
 Cc: Hoke, Joseph T SAW@SAS
 Subject: Marsh Mitigation Report

>Bill,

>

>Attached is the updated intro section of the Marsh/Wetland Mitigation Report. After reviewing Ed's comments I did find a few minor errors in the first table (deepening only- no mitigation). A few 50% and 10% values were transposed, as Ed suggested. The table has been corrected and the updated section is attached. The other sections for Wetland/Marsh Impacts AND Mitigation Plans 1-5 are ok. These files are dated February 2007.

>

>Ed was concerned about comparisons between the October 2006 and February 2007 reports. The reason we issued a new report in February was because during review of the October report we found an error in the post processor, which we have corrected. The error was in the way the duration of the report summations were specified in the program. The error was in the output processor only, and did not effect any of the EFDC runs. The October reports should be discarded and replaced with the attached file and the February 2007 reports.

>

>Thanks,

>Beth

>

>

>Beth Williams, PE

>Hydraulic Engineer

>US Army Corps of Engineers

Wetland/Marsh Mitigation Plan Evaluation

April 2007

Savannah Harbor Expansion Project
Wetland/Marsh Mitigation Plan Evaluation
MARSH Acreages Impacted ONLY

Deepening Only No Mitigation Options							
		Acreages Negatively Impacted (fresh to salt)		Acreages Positively Impacted (salt to fresh)		Net Impact (net negative), net positive	
		50% Exceedance	10% Exceedance	50% Exceedance	10% Exceedance	50% Exceedance	10% Exceedance
Basic Evaluation 1997- Existing Sea Level	44-ft	1633.2	0	0	0	(1633.2)	0.0
	45-ft	1633.2	0	0	0	(1633.2)	0.0
	46-ft	1633.2	0	0	0	(1633.2)	0.0
	48-ft	1932.2	299	0	0	(1932.2)	(299.0)
Sensitivity Analysis #1 2001- Existing Sea Level	44-ft	469.2	494.2	0	0	(469.2)	(494.2)
	45-ft	768.2	494.2	0	0	(768.2)	(494.2)
	46-ft	768.2	494.2	0	0	(768.2)	(494.2)
	48-ft	768.2	494.2	0	0	(768.2)	(494.2)
Sensitivity Analysis #2A 1997- 25cm Sea Level Rise	Existing	1287.4	299	0	0	(1287.4)	(299.0)
	44-ft	1932.2	299	0	0	(1932.2)	(299.0)
	45-ft	1932.2	299	0	0	(1932.2)	(299.0)
	46-ft	1932.2	299	0	0	(1932.2)	(299.0)
Sensitivity Analysis #2B 1997- 50cm Sea Level Rise	Existing	1932.2	299	0	0	(1932.2)	(299.0)
	44-ft	1932.2	1210.8	0	0	(1932.2)	(1210.8)
	45-ft	1932.2	1457.9	0	0	(1932.2)	(1457.9)
	46-ft	1932.2	1457.9	0	0	(1932.2)	(1457.9)
	48-ft	1932.2	1457.9	0	0	(1932.2)	(1457.9)

1997 Conditions- Average Historic Flow, Temperature, and Tidal Conditions- March through October 1997

2001 Conditions- Historic Low Flow, Average Temperature and Tidal Conditions- March through October 1997

Savannah Harbor Expansion Project
Wetland/Marsh Mitigation Plan Evaluation
MARSH Acreages Impacted ONLY

Plan 1

-McCoy Cut Diversion Structure;

-Channel Deepening on McCoy Cut to -4m NGVD and Upper Middle and Little Back River to -3m NGVD

		Acreages Negatively Impacted (fresh to salt)		Acreages Positively Impacted (salt to fresh)		Net Impact (net negative), net positive	
		50% Exceedance	10% Exceedance	50% Exceedance	10% Exceedance	50% Exceedance	10% Exceedance
Basic Evaluation 1997- Existing Sea Level	44-ft	988.4	0	0	0	(988.4)	0.0
	45-ft	988.4	0	0	0	(988.4)	0.0
	46-ft	988.4	0	0	0	(988.4)	0.0
	48-ft	988.4	0	0	0	(988.4)	0.0
Sensitivity Analysis #1 2001- Existing Sea Level	44-ft	469.2	0	0	664.7	(469.2)	664.7
	45-ft	469.2	0	0	664.7	(469.2)	664.7
	46-ft	469.2	0	0	664.7	(469.2)	664.7
	48-ft	469.2	0	0	417.6	(469.2)	417.6
Sensitivity Analysis #2A 1997- 25cm Sea Level Rise	44-ft	988.4	0	0	0	(988.4)	0.0
	45-ft	1287.4	0	0	0	(1287.4)	0.0
	46-ft	1287.4	0	0	0	(1287.4)	0.0
	48-ft	1633.2	299	0	0	(1633.2)	(299.0)
Sensitivity Analysis #2B 1997- 50cm Sea Level Rise	44-ft	1287.4	299	0	0	(1287.4)	(299.0)
	45-ft	1633.2	299	0	0	(1633.2)	(299.0)
	46-ft	1633.2	299	0	0	(1633.2)	(299.0)
	48-ft	1932.2	299	0	0	(1932.2)	(299.0)

1997 Conditions- Average Historic Flow, Temperature, and Tidal Conditions- March through October 1997

2001 Conditions- Historic Low Flow, Average Temperature and Tidal Conditions- March through October 1997

Savannah Harbor Expansion Project
Wetland/Marsh Mitigation Plan Evaluation
MARSH Acreages Impacted ONLY

Plan 2

- McCoy Cut Diversion Structure;
- Channel Deepening on McCoy Cut to -4m NGVD and Upper Middle and Little Back River to -3m NGVD;
- Fill Entire Sediment Basin to -3.85m NGVD

		Acreages Negatively Impacted (fresh to salt)		Acreages Positively Impacted (salt to fresh)		Net Impact (net negative), net positive	
		50% Exceedance	10% Exceedance	50% Exceedance	10% Exceedance	50% Exceedance	10% Exceedance
Basic Evaluation 1997- Existing Sea Level	44-ft	988.4	0	0	0	(988.4)	0.0
	45-ft	988.4	0	0	0	(988.4)	0.0
	46-ft	988.4	0	0	0	(988.4)	0.0
	48-ft	988.4	0	0	0	(988.4)	0.0
Sensitivity Analysis #1 2001- Existing Sea Level	44-ft	469.2	0	0	664.7	(469.2)	664.7
	45-ft	469.2	0	0	664.7	(469.2)	664.7
	46-ft	469.2	0	0	417.6	(469.2)	417.6
	48-ft	469.2	0	0	0	(469.2)	0.0
Sensitivity Analysis #2A 1997- 25cm Sea Level Rise	44-ft	988.4	0	0	0	(988.4)	0.0
	45-ft	988.4	0	0	0	(988.4)	0.0
	46-ft	1287.4	0	0	0	(1287.4)	0.0
	48-ft	1633.2	299	0	0	(1633.2)	(299.0)
Sensitivity Analysis #2B 1997- 50cm Sea Level Rise	44-ft	1287.4	299	0	0	(1287.4)	(299.0)
	45-ft	1633.2	299	0	0	(1633.2)	(299.0)
	46-ft	1633.2	299	0	0	(1633.2)	(299.0)
	48-ft	1932.2	299	0	0	(1932.2)	(299.0)

1997 Conditions- Average Historic Flow, Temperature, and Tidal Conditions- March through October 1997

2001 Conditions- Historic Low Flow, Average Temperature and Tidal Conditions- March through October 1997

Savannah Harbor Expansion Project
Wetland/Marsh Mitigation Plan Evaluation
MARSH Acreages Impacted ONLY

Plan 3

- McCoy Cut Diversion Structure;
- Channel Deepening on McCoy Cut to -4m NGVD and Upper Middle and Little Back River to -3m NGVD;
- Fill Entire Sediment Basin to -3.85m NGVD;
- Rifle Cut Closed

		Acreages Negatively Impacted (fresh to salt)		Acreages Positively Impacted (salt to fresh)		Net Impact (net negative), net positive	
		50% Exceedance	10% Exceedance	50% Exceedance	10% Exceedance	50% Exceedance	10% Exceedance
Basic Evaluation 1997- Existing Sea Level	44-ft	988.4	0	453	345.8	(535.4)	345.8
	45-ft	988.4	0	453	345.8	(535.4)	345.8
	46-ft	988.4	0	453	345.8	(535.4)	345.8
	48-ft	1287.4	0	453	345.8	(834.4)	345.8
Sensitivity Analysis #1 2001- Existing Sea Level	44-ft	469.2	0	345.8	417.6	(123.4)	417.6
	45-ft	469.2	0	345.8	417.6	(123.4)	417.6
	46-ft	469.2	0	345.8	417.6	(123.4)	417.6
	48-ft	768.2	494.2	345.8	0	(422.4)	(494.2)
Sensitivity Analysis #2A 1997- 25cm Sea Level Rise	44-ft	1287.4	299	453	345.8	(834.4)	46.8
	45-ft	1287.4	299	453	345.8	(834.4)	46.8
	46-ft	1287.4	299	453	0	(834.4)	(299.0)
	48-ft	2055.6	299	0	0	(2055.6)	(299.0)
Sensitivity Analysis #2B 1997- 50cm Sea Level Rise	44-ft	1586.4	299	0	0	(1586.4)	(299.0)
	45-ft	1586.4	299	0	0	(1586.4)	(299.0)
	46-ft	2055.6	299	0	0	(2055.6)	(299.0)
	48-ft	2055.6	299	0	0	(2055.6)	(299.0)

1997 Conditions- Average Historic Flow, Temperature, and Tidal Conditions- March through October 1997

2001 Conditions- Historic Low Flow, Average Temperature and Tidal Conditions- March through October 1997

Savannah Harbor Expansion Project
Wetland/Marsh Mitigation Plan Evaluation
MARSH Acreages Impacted ONLY

Plan 4

-McCoy Cut Diversion Structure;

-Channel Deepening on McCoy Cut to -4m NGVD and Upper Middle and Little Back River to -3m NGVD;

-Realign Middle River Outlet by Closing Middle River at Front River and Opening New Cut;

-Close Houston Cut

		Acreages Negatively Impacted (fresh to salt)		Acreages Positively Impacted (salt to fresh)		Net Impact (net negative), net positive	
		50% Exceedance	10% Exceedance	50% Exceedance	10% Exceedance	50% Exceedance	10% Exceedance
Basic Evaluation 1997- Existing Sea Level	44-ft	1334.2	0	210.1	598	(1124.1)	598.0
	45-ft	1334.2	0	0	598	(1334.2)	598.0
	46-ft	1334.2	0	0	598	(1334.2)	598.0
	48-ft	1334.2	0	0	598	(1334.2)	598.0
Sensitivity Analysis #1 2001- Existing Sea Level	44-ft	469.2	0	345.8	417.6	(123.4)	417.6
	45-ft	469.2	0	598	716.6	128.8	716.6
	46-ft	469.2	0	598	0	128.8	0.0
	48-ft	469.2	494.2	598	0	128.8	(494.2)
Sensitivity Analysis #2A 1997- 25cm Sea Level Rise	44-ft	1334.2	0	0	598	(1334.2)	598.0
	45-ft	1803.4	0	0	598	(1803.4)	598.0
	46-ft	1803.4	0	0	598	(1803.4)	598.0
	48-ft	1803.4	0	0	598	(1803.4)	598.0
Sensitivity Analysis #2B 1997- 50cm Sea Level Rise	44-ft	1803.4	0	0	299	(1803.4)	299.0
	45-ft	1803.4	0	0	299	(1803.4)	299.0
	46-ft	1803.4	0	0	299	(1803.4)	299.0
	48-ft	1803.4	0	0	0	(1803.4)	0.0

1997 Conditions- Average Historic Flow, Temperature, and Tidal Conditions- March through October 1997

2001 Conditions- Historic Low Flow, Average Temperature and Tidal Conditions- March through October 1997

Savannah Harbor Expansion Project
Wetland/Marsh Mitigation Plan Evaluation
MARSH Acreages Impacted ONLY

Plan 5

-McCoy Cut Diversion Structure;

-Channel Deepening on McCoy Cut to -4m NGVD and Upper Middle and Little Back River to -3m NGVD;

-Realign Middle River Outlet by Closing Middle River at Front River and Opening New Cut;

-Close Houston Cut;

		Acreages Negatively Impacted (fresh to salt)		Acreages Positively Impacted (salt to fresh)		Net Impact (net negative), net positive	
		50% Exceedance	10% Exceedance	50% Exceedance	10% Exceedance	50% Exceedance	10% Exceedance
Basic Evaluation 1997- Existing Sea Level	44-ft	988.4	0	663.1	1153.9	(325.3)	1153.9
	45-ft	988.4	0	663.1	1153.9	(325.3)	1153.9
	46-ft	988.4	0	663.1	1153.9	(325.3)	1153.9
	48-ft	988.4	0	663.1	1153.9	(325.3)	1153.9
Sensitivity Analysis #1 2001- Existing Sea Level	44-ft	469.2	0	1153.9	1015.6	684.7	1015.6
	45-ft	469.2	494.2	1153.9	598	684.7	103.8
	46-ft	469.2	494.2	1153.9	598	684.7	103.8
	48-ft	469.2	494.2	1153.9	0	684.7	(494.2)
Sensitivity Analysis #2A 1997- 25cm Sea Level Rise	44-ft	988.4	0	663.1	1153.9	(325.3)	1153.9
	45-ft	988.4	0	663.1	1153.9	(325.3)	1153.9
	46-ft	988.4	0	663.1	1153.9	(325.3)	1153.9
	48-ft	1457.6	0	663.1	1153.9	(794.5)	1153.9
Sensitivity Analysis #2B 1997- 50cm Sea Level Rise	44-ft	988.4	0	663.1	1153.9	(325.3)	1153.9
	45-ft	988.4	0	663.1	1153.9	(325.3)	1153.9
	46-ft	1457.6	0	663.1	808.1	(794.5)	808.1
	48-ft	1457.6	0	663.1	598	(794.5)	598.0

1997 Conditions- Average Historic Flow, Temperature, and Tidal Conditions- March through October 1997

2001 Conditions- Historic Low Flow, Average Temperature and Tidal Conditions- March through October 1997

From: [Bailey, William G. SAM@SAS](mailto:Bailey.William.G.SAM@SAS)
To: "Tim Barrett@cinr.state.ga.us"; "Matt Thomas (E-mail)"
Cc: [Bradley, Kenneth P. SAM](mailto:Bradley.Kenneth.P.SAM); [Garrett, Thomas A. SAS](mailto:Garrett.Thomas.A.SAS)
Subject: Savannah Harbor Expansion Project - Impacts to Striped bass
Date: Wednesday, March 19, 2008 6:10:54 PM

On Monday, I sent you a summary of the fishery impact information with the D.O. systems included and said we were finalizing the full report. I just sent out a notice for the ftp site where the Fisheries Impact Report is posted. That report includes figures that show the locations of Acceptable and Unacceptable habitat for Striped bass.

Please look over this information and let me know what your current thoughts are on mitigation for remaining impacts to Striped bass. The summary table shows that substantial adverse impacts would be expected to spawning habitat (up to -13 to -24 percent based on river flows). Impacts to other life stages would be mixed.

When we last spoke I mentioned an approach to determine funding for stocking. I hope you have had a chance to think about that -- or another approach -- some more. If you remember, I mentioned totally up the requirements and expenses for a Striped bass stocking program based on there being no natural recruitment -- that you would have to provide all the young into the system through stocking. Then if mitigation is necessary, we could use a percentage of that effort and expenses equivalent to the impacts expected from this project. So if the average annual cost to run a full stocking program is \$400,000 a year and the project reduces the habitat by 50%, the mitigation would be 50% of the \$400,000. That was my thought for an approach.

If you and Matt agree with that approach, you would need to put together the average annual costs for a full stocking program. Now that we have the impact numbers, we can discuss what impact number we believe is appropriate. As the summary table shows, the impacts vary by life stage, river flow, and channel depth. I am developing a mitigation plan for each depth alternative.

I will need to complete development of the preliminary mitigation plans within the next two weeks. So, if we could get together to talk about this soon, I would appreciate it. If you think there is no need to talk, just let me know what you think.

Do we get any credit for improving Flounder habitat? :)

Bill Bailey
 912-652-5781

From: [Bailey, William G SAM@SAS](mailto:Bailey.William.G.SAM@SAS)
To: ["Stephania Bolden"](mailto:Stephania.Bolden)
Cc: ["Kay Davy \(kay.davyv@noaa.gov\)"; Bradley, Kenneth P SAM; Helms, Hugh SAW; Garrett, Thomas A SAS](mailto:Kay.Davyv@noaa.gov)
Subject: Savannah Harbor Expansion Project - Impacts to Shortnose sturgeon
Date: Wednesday, March 19, 2008 5:33:25 PM
Attachments: [EXPAN Impacts to SNS Mar08.doc](#)

I have attached a write-up that summarizes the impacts we expect to occur to Shortnose sturgeon habitat from implementation of the proposed Savannah Harbor Expansion Project. The document discusses mitigation for impacts remaining after the flow-altering features and dissolved oxygen system are included. Please review the document and provide me with your comments. I would specifically like answers to the following questions:

1. Based on the level of remaining impacts to Shortnose sturgeon, do you believe that mitigation is warranted and likely to be required by your agency?
2. If you believe mitigation is warranted, do you believe the proposed mitigation (fish passage at New Savannah Bluff Lock and Dam) is appropriate and sufficient for the 48-foot depth alternative?
3. Again if you believe mitigation is warranted, do you believe the proposed mitigation (fish passage at New Savannah Bluff Lock and Dam) is appropriate for the other depth alternatives or could some other mitigation be more suitable?

Although the answers will be helpful in our preparation of the Draft EIS, they will also be helpful for another document that I am to soon prepare for the Corps Headquarters. That document is to discuss the project's impacts to Shortnose sturgeon and the potential for using fish passage at New Savannah Bluff Lock and Dam as the mitigation for those impacts. I would include your views on the need for mitigation and the acceptability of NSBL&D as that mitigation in that document.

I just sent out a notice for the ftp site where the Fisheries Impact Report is posted. That report includes figures that show the locations of Acceptable and Unacceptable habitat for Shortnose sturgeon.

Call or email if you have questions.

Bill Bailey
 912-652-5781

SAVANNAH HARBOR EXPANSION PROJECT

ASSESSMENT OF IMPACTS TO SHORTNOSE STURGEON

The Corps has completed the modeling to identify physical changes that are expected to occur as a result of implementation of the various channel deepening alternatives. That analysis was completed on 19 March 2008. The analysis includes both the flow-altering and Dissolved Oxygen (D.O.) components of the mitigation plans. The analysis used the model input parameters identified by the Fishery Interagency Coordination Team, as well as the definitions of Acceptable and Unacceptable habitat developed by that team.

The modeling results are summarized in the following table:

Suitable Habitat for Shortnose Sturgeon

	JUVENILES	ADULTS		
	SUITABLE HABITAT (km²)			
	January 50% flows	January 50% flows	August Avg flows*	August Low flows*
Existing Conditions 42 ft Depth	6.98	16.10	5.73	0.81
44 ft depth Plan 6b	7.05	15.08	6.34	-
% difference	1.1%	-6.4%	10.6%	-
% diff (Deepening Only)**	-5.0%	-0.5%	-26.20	-
45 ft depth Plan 6a	7.15	14.97	5.55	-
% difference	2.4%	-7.0%	-3.1%	-
% diff (Deepening Only)**	-10.4%	-0.5%	-33.80	-
46 ft depth Plan 6a	6.98	14.72	5.51	-
% difference	0.1%	-8.6%	-3.9%	-
% diff (Deepening Only)**	-15.9%	-0.8%	-39.10	-
48 ft depth Plan 6a	6.86	14.33	5.17	6.21
% difference	-1.6%	-11.0%	-9.7%	665.5%
% diff (Deepening Only)**	-21.6%	-1.1%	-41.90	-

The following paragraphs describe the impacts to Shortnose sturgeon (SNS), as enumerated in the table.

Impacts would occur to both the juvenile and adult life stages as a result of the proposed project. The impacts are not uniform across all conditions, but generally become increasingly adverse with the larger channel depths.

Impacts to juvenile habitat were examined during the winter under average river flow conditions. The modeling indicates that project impacts to this life stage would be minimal. Increases in habitat volume (ranging from 0.1 to 2.4 percent) would occur with the smaller depth alternatives. The largest channel depth (48-foot alternative) would result in the loss of -1.6 percent of existing juvenile habitat. With the uncertainties inherent in the impact prediction process, these levels of impacts are not judged as being significant. Additional information could alter that assessment.

Impacts to adult habitat were examined during both winter and summer months under average river flow conditions. The modeling indicates that adverse impacts would occur to this life stage at a low level. A fairly constant loss of winter habitat would occur with the various depth alternatives, ranging between -6.4 and -11.0 percent. A wider range of impacts would occur to the summer habitat, ranging from +10.6 percent with the 44-foot depth to -9.7 percent with the 48-foot depth.

As part of the design process for the D.O. improvement system, the Corps developed information for summer adult habitat under drought conditions. The modeling showed that a substantial drought (13 percent chance of occurrence) would result in the smallest amount of suitable habitat (0.81 km²) being available of all the conditions that were examined. The results were produced as a result of modeling performed to design a D.O. system to meet water quality standards under the maximum dredging case, so results are only available for the 48-foot depth alternative. But the results indicate that the average river flow conditions are likely to represent the maximum project impact to SNS. Under conditions which would be much more stressful to sturgeon than normal, the proposed harbor deepening and mitigation would not adversely impact sturgeon in this harbor. Instead, it would increase suitable habitat by 665 percent.

If one considers an adverse impact threshold of -10 percent, the only life stage, season, and channel depth alternative that produces such substantial effects is the 48-foot depth on adult winter habitat. The 48-foot depth with adult summer habitat comes quite close, with an adverse impact of -9.7 percent. The 46-foot depth produces the next smaller impact, with an adverse impact of -8.6 percent on adult winter habitat.

Mitigation is believed to be warranted when adverse impacts exceed 10 percent to an endangered species. Before the impact results were completed, the Corps consulted the Fishery Interagency Coordination Team to identify measures which could improve SNS habitat in Savannah Harbor. This team of experts from the Federal and State natural resource agencies could not identify any physical action that could be taken within the harbor area to improve SNS habitat. They did identify one measure that could be taken

to help the population of Shortnose sturgeon that resides in the harbor. The team stated that, in addition to the harbor, the Savannah SNS population uses upriver portions of the Savannah River for portions of its life cycle. Adults migrate upriver to spawn in the spring. That migration has been shortened by the dams that were constructed on the river. Restoration of some of that historic spawning area by removing dams or allowing passage past the dam would very likely help this endangered population.

In 1999, Savannah District had proposed removing the New Savannah Bluff Lock and Dam, the first dam encountered by fish migrating upriver. That is a low head dam located at river mile 187.4 near Augusta, Georgia, that is operated by the Corps. In WRDA 2000, Congress authorized rehabilitation of that dam, including the addition of a fish bypass channel. In 2001, the District prepared an addendum to its report recommending rehabilitation, as Congress had authorized. Because the lock would not serve a navigation need, its originally Congressionally-authorized purpose, funds to rehabilitate the lock have not been included in any President's Budget submitted to Congress. In the eight years since the rehabilitation was authorized, Congress has not funded substantial further work on that project. So after an initial 35 percent design was prepared in 2002, no further work has been completed on the fish bypass structure. An updated cost estimate indicates it would cost roughly \$6 million to construct the fish bypass channel at NSBL&D.

The Corps has no indication when or if Congress may fund rehabilitation of the lock and the accompanying fish bypass channel. Funding the rehabilitation through the Corps normal budgetary process is very unlikely, given the present budget guidance.

Rehabilitation of the lock and construction of the accompanying fish bypass channel is very uncertain. Savannah District believes that recent Corps and Congressional funding guidance provide no indication that this work is likely to be funded soon. In light of the uncertainty surrounding this funding, the District believes that one should not assume that construction of the fish bypass channel and lock rehab project will occur in the foreseeable future.


With no assurance that the fish bypass channel would be constructed in the foreseeable future, the bypass channel could be constructed as mitigation for the adverse impacts from the proposed harbor deepening project to the Savannah Shortnose sturgeon population.

Such mitigation would be out-of-kind, as it would provide spawning habitat instead of the summer and winter adult habitat that would be impacted by the project. But no in-kind mitigation opportunities could be identified by the natural resource agencies. The 1998 NMFS "Final Recovery Plan for the Shortnose Sturgeon" identified low recruitment as being a factor in the Savannah River population. Stocking occurred in the early 1990's, with stocked juveniles being collected later. This indicates that rearing habitat was present at that time. The continued presence of adults in the harbor indicates that some suitable habitat remains for that life stage. Therefore, expanding the amount of spawning habitat by constructing the bypass at the New Savannah Bluff Lock and Dam could

remove a bottleneck in the overall population size. The additional spawning area would also decrease the species' reliance on the few spawning areas they presently use. The additional reach of river made available for spawning would provide the population with a buffer, should an existing spawning site become temporarily or permanently unusable.

Recently the next two dams located upstream of the New Savannah Bluff Lock and Dam received new operating licenses from FERC. Provisions were included in their license agreements that if fish passage occurred at NSBL&D, fish passage structures would also have to be installed at those dams. Providing fish passage at NSBL&D would open up more than 20 miles of river to the next upstream dam at Augusta Shoals. But with passage at the other two dams included, it would effectively result in fish being capable of moving past Augusta Shoals and the SCE&G Stevens Creek Dam all the way to the J. Strom Thurmond Dam, located 36 river miles upstream of NSBL&D. A map on the following page shows the locations of the dams near Augusta. The Augusta Shoals, probably the most ecologically-valuable single shoal area within that 36-mile reach, starts about 28 miles upstream of the NSBL&D. When the pools above NSBL&D and above the Stevens Creek Dam are subtracted from the length of main river that would be opened to sturgeon, fish passage at New Savannah Bluff should open 7 miles of free-flowing river to sturgeon which could serve as spawning habitat. When compared to the roughly 136 miles of river between Clio (R.M. 61), which is just upstream of the head of tides, and New Savannah Bluff, one could say that providing passage at New Savannah Bluff would expand the amount of free-flowing river that could serve as spawning habitat by 5 percent. That percentage is less than the 10 - 11 percent loss in adult habitat that a 48-foot harbor deepening project is expected to produce. However, the Augusta Shoals area, which would be available for spawning, is considered the most ecologically-valuable remaining riverine portion of the Savannah River. In addition, other spawning habitats may be made available upstream of New Savannah Bluff if tributaries are included. Stevens Creek is a fairly substantial tributary flowing from the South Carolina side. It enters the river just above the Stevens Creek Dam and would be opened up for spawning. The quality of habitat in that creek is unknown.

Another physical measure could be provided in the Savannah River to enhance spawning of Shortnose sturgeon. That would be the construction of a gravel bed downstream of the first dam, to provide a new spawning site. The success of such a feature for SNS is unknown, but it could provide some additional spawning habitat at a lower cost than providing fish passage at NSBL&D. Such a measure may be appropriate if the level of impacts expected is more than minimal but less than substantial. It could also be used if the costs of constructing and operating a fish bypass channel at NSBL&D are deemed excessive.

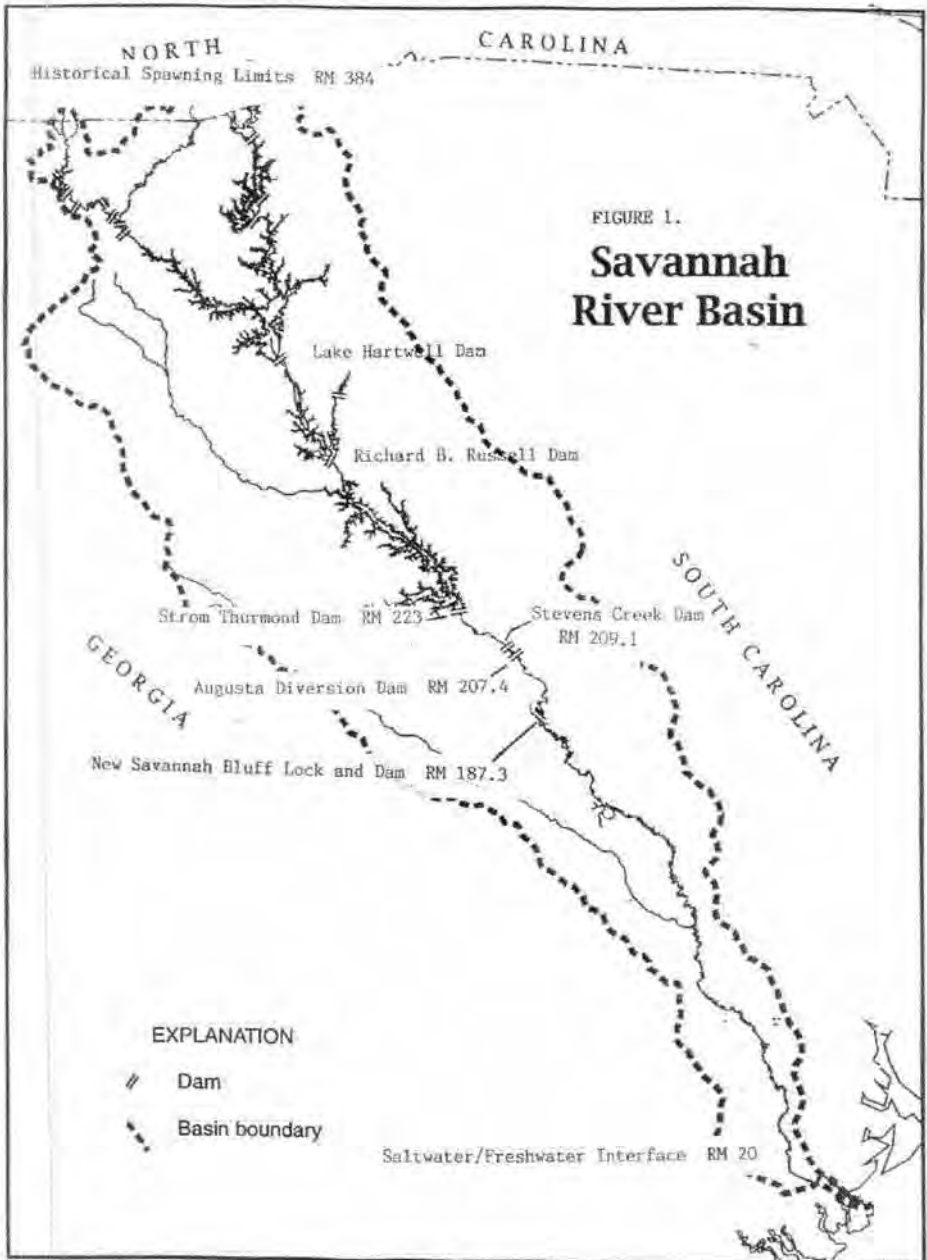

From: [Bailey, William G SAS](#)
To: ["Kelle Moore@costal.dnr.state.ga.us"](#); ["Brad_Gane@dnr.state.ga.us"](#); ["Tim Barrett"](#); ["GADNR Ed Bettross"](#); ["Priscilla Wendt"](#); ["berrvb@dnr.sc.gov"](#); ["Bill Post"](#); ["Chris Thomason"](#); ["backhaic@dher.sc.gov"](#); ["Curtis Jovner"](#); ["mueller.heinz@epa.gov"](#); ["Hoberg.Chris@epamail.epa.gov"](#); ["Gagliano.Paul@epamail.epa.gov"](#); ["walter_bolin@fws.gov"](#); ["FWS Amanda Hill"](#); ["Sandy Tucker@fws.gov"](#); ["Bill Wikoff@fws.gov"](#); ["jane_griess@fws.gov"](#); ["Chuck Hayes"](#); ["Ed Eudaly"](#); ["Boyd Kynard"](#); ["smito-Brownell, Prescott"](#); ["Sykes, James A SAS; Eubanks, Michael J SAS"](#)
Cc: ["Kav Davy \(kav.davy@noaa.gov\)"](#); ["Stephanie Bolden"](#); ["Bradley, Kenneth P SAS; Okane, Jason D SAS; Hvett, Scott M SAS; "Jeff Larson"; "hmoorer@gaports.com"](#)
Subject: Fish bypass structure at New Savannah Bluff Lock & Dam
Date: Friday, October 01, 2010 3:42:27 PM
Attachments: [New Savannah L&D Fish Passage_Dec.02.pdf](#)

The Corps intends to propose construction and operation of a fish bypass structure around the New Savannah Bluff Lock & Dam as a mitigation feature in the Savannah Harbor Expansion Project. We intend to propose the same design we developed when we evaluated rehabilitating the lock and dam and giving it to local interests. The 35% design report that we had prepared in 2002 is the latest and most detailed design document on the proposed structure. The bypass was designed to pass shortnose sturgeon, which is the species of interest for the Savannah Harbor Expansion Project.

NOAA Fisheries has requested we re-coordinate the design with you. Please let me know if you are aware of any new technology or information that may have developed since 2002 that would result in a more effective or lower cost fish passage structure at this location for shortnose sturgeon.

Please provide this information by 15 October.

FYI -- Congress authorized rehabilitation of the lock and dam (with the fish bypass structure) in 2000, but they have not provided any funds to implement that work. The City of North Augusta is still pursuing taking over the lock and dam after the Corps rehabs it.

Bill Bailey
 Chief, Planning Division

G. Multiple Resources

1. E-MAIL from William G. Bailey dated 7 March 2007, SHEP, Modeling Status Report
2. E-MAIL from William G. Bailey dated 28 April 2008, SHEP, Interagency Coordination

From: [Bailey, William G SAMatSAS](#)
To: ["Kelie Moore@coastal.dnr.state.ga.us"](#); ["Matt Thomas \(F-mail\)"](#); ["Keith Parsons@mail.dnr.state.ga.us"](#); ["Paul Lammie" \(F-mail\)](#); ["beckhag@dhec.sc.gov"](#); ["Wade Cantrell"](#); ["Curtis Joyner"](#); ["Ed Eudaly@fws.gov"](#); ["john_robinette@fws.gov"](#); ["pconrads@usgs.gov"](#); ["Priscilla H Wendt \(wendtp@dnr.sc.gov\)"](#); ["Stephanie Bolden"](#); ["kay.davv@noaa.gov"](#); ["katumba.ntale@epa.gov"](#); ["bisterfeld.ted@epa.gov"](#); ["Jim Greenfield \(F-mail\)" \(F-mail\)"](#)
Cc: ["Larry Turner"](#); ["kirklaql@dhec.sc.gov"](#); ["PRESTOHS@dhec.sc.gov"](#); ["Pace Wilber"](#); ["linda_macorenor@dnr.state.ga.us"](#); ["Jeff Larson@dnr.state.ga.us"](#); [Bradley, Kenneth P SAM](#)
Subject: Savannah Harbor Expansion - Modeling Status Report - Mar 07, 2007
Date: Wednesday, March 07, 2007 2:01:45 PM
Attachments: [Modeling_Update.doc](#)

FYI - Here is the latest status report of the engineering modeling efforts.

I just received the water quality impact report. We'll get copies made and sent out to you. Water quality with the mitigation is scheduled to be complete at the end of March.

I've also received another report on wetlands (using the 0.5 ppt contour) based on runs over the growing season. Apparently the previous one we provided was based on a 12-month salinity regime. I'll distribute that when I get copies made.

I expect to soon get the reports on fishery impacts and the mitigation analyses for fisheries.

BB

Modeling Update—March 7, 2007

Completed or N/A In Progress Not Yet Started Changes from previous update noted in **BOLD** *After MPD5-No Code in Schedule

Impacts		Mitigation Plans 1-5		Mitigation Plans 6 & 7		USFWS Alternatives	
Fish Habitat		Fish Habitat		Fish Habitat		Fish Habitat	
EFDC: Completed WASP: Completed Post Processing: Completed Mapping/Reporting: Completed	FIE2 99%	EFDC: Completed WASP: Completed Post Processing: Completed Mapping/Reporting: Completed		Will be done for selected path ONLY	+	EFDC: Not Yet Started WASP: Not Yet Started	
Errors found and corrected- waiting on CD with updated report from TL		Errors found and corrected- waiting on CD with updated report from TL					
Wetland/Marsh		Wetland/Marsh		Wetland/Marsh		Wetland/Marsh	
EFDC: Completed WASP: N/A Post Processing: Completed Mapping (EFDC output): Completed MCM: Completed, but will need to be confirmed for CD and hardcopy given to planning for distribution to technical group	FSMIE2 99%	EFDC: Completed WASP: N/A Post Processing: Completed Mapping (EFDC output): Completed MCM: Completed, but will need to be confirmed for CD and hardcopy given to planning for distribution to technical group Received workplan from USGS Meeting scheduled for Thursday.	MPD2 85%	EFDC: Not Yet Started Post Processing: Not Yet Started Mapping (EFDC output): Not Yet Started MCM: Not Yet Started Waiting on Decision for Plans 6 & 7	MPD8 0%	EFDC: In Progress WASP: N/A Screening runs completed. Output given to planning to distribute to USFWS and others. Tidal influence output available	MPD9 25%
Water Quality		Water Quality		Water Quality		Water Quality	
EFDC: Completed WASP: Completed Post Processing: Completed Mapping/Reporting: Completed Received electronic copy of report and are currently reviewing	WQDQ2 99%	EFDC: Completed WASP: Completed Post Processing: Completed Mapping/Reporting: In Progress Contracting Issue Resolution Ongoing		Will be done for selected path ONLY	*	EFDC: Not Yet Started WASP: Not Yet Started	
Chlorides		Chlorides		Chlorides		Chlorides	
EFDC: Completed WASP: N/A Chloride Model: Not Yet Started Mapping/Reporting: In Progress	CIE1 75%	EFDC: Completed WASP: N/A Chloride Model: Not Yet Started Mapping/Reporting: Not Yet Started		Will be done for selected path ONLY	*	N/A	
Sedimentation		Sedimentation		Sedimentation		Sedimentation	
EFDC: Completed Post Processing: Completed Reporting: Completed	SA 100%	N/A		Will be done for selected path ONLY	*	N/A	
Hurricane		Hurricane		Hurricane		Hurricane	
EFDC: Completed Reporting: Completed	HSE 100%	N/A		Will be done for selected path ONLY	+	N/A	

From: Bailey, William G SAM@SAS
To: "Kelle Moore@coastal.dnr.state.ga.us"; "Keith Parsons@mail.dnr.state.ga.us"; "Tim Barrett"; "Wade Cantrell"; "beckhaic@dhc.sc.gov"; "Curtis Joyner (joynercm@dhc.sc.gov)"; "Pncilla H Wendt (wendtp@dnr.sc.gov)"; "Bob Perry"; "Kay Davy (kay.davy@noga.gov)"; "Stephanie Bolden"; "Ed Eudaly@fws.gov"; "John robinette@fws.gov"; "Ted Bisterfeld (bisterfeld.ted@epa.gov)"
Cc: "Jane Griess@fws.gov"; Kathy Chapman@fws.gov; "kitchensw@wec.ufl.edu"; "Kajumba Ntale@epamail.epa.gov"; "Lord Bob@epamail.epa.gov"; mueller.heinz@epamail.epa.gov; "Kirklaol@dhc.sc.gov"; "PRESTOHS@dhc.sc.gov"; "Pace Wilber"; "Miles M. Croom (E-mail)"; "Brad Gane@dnr.state.ga.us"; "Jeff Larson@dnr.state.ga.us"; "Matt Thomas (E-mail)"; Garrett, Thomas A SAS; Holke, Joseph T SAW@SAS; "hmoorer@gaports.com"; "Larry Keegan@ch2m.com"; Bradley, Kenneth P SAM; Heine, Hugh SAW; Small, Daniel I SAD; Barnett, Dennis W SAD; Konecky, Steven A HQ02; Matusiak, Mark HQ02
Subject: Savannah Harbor Expansion Project: Interagency Coordination
Date: Monday, April 28, 2008 3:33:14 PM
Attachments: EXPAN Monit & Adaptive Mgt Program 26Apr08.doc
 EXPAN Project Description Tables.doc
 EXPAN Dredging Quantities 26Apr08.xls

I am providing information on the proposed Mitigation Plans and the Monitoring Plan. This information will help you understand our present thoughts about the Project.

The USFWS will use this information to prepare a Planning Aid Report for inclusion in the Draft EIS we are preparing.

In August, we will meet with Corps Division and Headquarters-level representatives to review the project and the Draft Reports. The Corps will seek your views (verbal) at that time. About a month before the meeting we will send those Corps reviewers the Draft General Re-Evaluation Report and Draft EIS. We will provide you the same reports at that time. Soon after that August meeting, the Service will seek your views so they can revise the Planning Aid Report into a Draft Fish and Wildlife Coordination Act (FWCA) Report. We will include that FWCA Report in the Draft EIS that we send out in November for agency and public comment.

The documents I am providing give you a head start on your review of the decision portions of the EIS.

I am attaching the following three documents:

- * Monitoring and Adaptive Management Plan
- * Project Description Tables
- * Dredging Quantities

I have posted the Mitigation Planning document to the following ftp site:

ftp.sam.usace.army.mil/outgoing/SavannahHarborExpansion/

The document is called EXPAN Mitigation Planning 26Apr08.doc. The document is too big (30 MB) to send by email. It will be on this ftp site for 7 days.

At this point our economic analysis is still underway, so we do not know what the Tentatively Recommended Plan will be. For your purposes, assume the 48-foot depth will be the Tentatively Recommended Plan.

We are not seeking formal comments on these documents, but if you find something in them that is not acceptable, please let me know.

Bill Bailey
 912-652-5781

Table 1
Existing and Recommended Project Widths (feet)

Range Name	Station Limits		Existing Project Width	Recommended Project Width
	Lower	Upper		
Tybee	82+000B ^A	40+522B	600	564
0A	40+522B	38+186B	800	764
Bloody Point	38+186B	23+475B	600	564
1A	23+475B	20+832B	800	858 ^B
Jones Island	20+832B	16+142B	700	758 ^B
2A	16+142B	13+771B	800	764 to 858 ^C
Tybee Knoll Cut	13+771B	1+380B	500	464
4	1+380B	1+552	Varies	Varies
New Channel	1+552	9+526	500	464
6	9+526	11+385	600	600
Long Island Crossing	11+385	24+920	500	464
<i>Long Isl. Meeting Lane¹</i>	<i>16+000</i>	<i>20+000</i>	<i>not applicable</i>	<i>564</i>
8	24+920	27+317	800	764
Lower Flats	27+317	31+037	600	658 ^B
10 through 12	31+037	36+948	600 to 700	732 to 832 ^C
Upper Flats	36+948	40+437	550	532
14	40+437	41+693	500 to 700	482 to 682
Bight Channel	41+693	49+489	700	700
Ft. Jackson Channel	49+489	53+127	Varies	Varies ^C
21	53+127	54+481	600	658 ^B
Oglethorpe	54+481	61+405	500	482
<i>Oglethorpe Meeting Lane²</i>	<i>55+000</i>	<i>58+500</i>	<i>not applicable</i>	<i>582</i>
23	61+405	63+277	500	464
24 through 25	63+277	69+734	500	464
26	69+734	71+128	600	582
City Front Channel	71+128	76+537	500	464
28	76+537	77+283	550	532
Marsh Island Channel	77+283	87+642	500	464
32	87+642	90+701	550	532
33 through 35	90+701	97+543	500	464
Kings Isl. Turing Basin	97+543	103+500	Varies	Varies ^B
Notes:				
¹ Includes 1,000-foot transition, ² Includes 500-foot transition				
^A Existing project starts at 60+000B, recommended project requires 22,000 linear feet of channel extension to 82+000				
^B Width expansion on north side of channel only				
^C Width expansion on south side of channel only				

Table 2
Existing and Recommended Project Depths (feet below MLLW)

Station Limits		Existing Project Depths			Recommended Project Depths			
Lower	Upper	Channel	Advance	Maint.	Channel	Advance	Maint.	
			Maint	Dredging		Maint	Dredging	
82+000B	60+000B		Not applicable			50	0	50
60+000B	14+000B	44	0	44	50	0	50	
14+000B	26+000	42	2	44	48	2	50	
26+000	35+000	42	4	46	48	4	52	
35+000	37+000	42	6	48	48	6	54	
37+000	50+500	42	4	46	48	4	52	
50+500	52+750	42	4	46	48	6	54	
52+750	54+000	42	4	46	48	4	52	
54+000	60+250	42	4	46	48	8	56	
60+250	66+750	42	4	46	48	4	52	
66+750	70+000	42	4	46	48	6	54	
70+000	102+000	42	2	44	48	2	50	
102+000	103+500	42	0	42	48	0	48	
Kings Island Turning Basin								
		42	8	50	48	8	56	

Range	New Work Sediment Placement Site	Average Annual Maint Yards	48 foot +AM+OD New Work-qtls only
ENTRANCE CHANNEL			
(-)85+000 to -57+000	SITE 11	10,000	1,974,509
(-)57+000 to -53+500	ODMDS	3,000	451,614
(-)53+500 to -40+000	SITE 2 & 2 EXT	54,000	1,811,713
(-) 40+000 to -30+000	ERDC-SITE 2EXT	325,000	1,419,199
(-)30+000 to -20+000	ERDC-SITE 2EXT	281,000	1,544,738
(-)20+000 to -10+000	SITE 2	163,000	1,499,974
(-) 10+000 to 0+000	MLW 500	155,000	1,051,036
0+000 to +4+000	MLW 200	76,000	375,403
Subtotal CY		1,067,000	10,128,186
INNER HARBOR			
4+000 to 24+000	Jones Oyster Isl	225,000	2,153,272
24+000 to 40+000	14 B	364,000	2,451,494
40+000 to 50+000	14 A & 14 B	900,000	2,186,062
50+000 to 70+000	13 B & 13 A	2,076,000	4,476,769
70+000 to 79+000	13 A	294,000	1,009,180
79+000 to 97+750	12 B & 13 A	605,000	2,011,696
97+750 to 102+000	12 B	1,456,000	1,991,152
102+000 to 103+000	12 B	51,000	125,000
Subtotal CY		5,971,000	16,404,625
Project Total CY		7,038,000	26,532,811 CY

Entrance Channel = Pipeline and Hopper Dredges
 Inner Harbor = Pipeline Dredges

AM = Advance Maintenance
 OD = Overdepth

46 foot +AM+OD New Work-qtys only	45 foot +AM+OD New Work-qtys only	44 foot +AM+OD New Work-qtys only
930,087	506,258	229,770
303,812	228,763	152,929
1,214,945	912,183	606,638
944,052	703,369	462,393
1,028,140	767,714	507,797
969,117	702,635	442,682
689,902	509,821	333,319
236,000	165,000	102,000
6,316,055	4,495,743	2,837,528
1,449,500	1,066,300	761,000
1,658,446	1,219,600	869,000
1,570,700	1,186,000	978,000
3,616,193	3,090,698	2,760,271
660,000	466,000	311,000
1,338,200	952,100	655,000
1,575,900	1,362,000	1,161,000
88,000	44,000	44,000
11,956,939	9,386,698	7,539,271
18,272,994 CY	13,882,441 CY	10,376,799 CY

III. LEAD AND COOPERATING AGENCIES

III. Lead and Cooperating Agencies

1. MFR dated 25 April 2002, SHEP, LCA meeting. 22 April 2002
2. MFR dated 29 March 2004, SHEP, In-Progress Review Meeting held on 29 October 2004.
3. MFR dated 25 March 2005, SHEP, 2nd In-Progress Review Meeting
4. MFR dated 27 June 2005, SHEP, Lead and Cooperating Agency meeting. 16 June 05
5. MFR dated 26 June 07, Revised 29 June 07, Revised 03 August 07, SHEP, Interagency Coordination Meeting Record of 20-21 June Meeting.
6. Vision of the Cooperating Agencies
7. MFR dated 27 June 2007, SHEP, In Progress Review Meeting
8. MFR dated 20 March 2007, SHEP, Lead and Cooperating Agency meeting. 8 Mar 07
9. MFR dated 20 September 2007, SHEP, In Progress Review Action Items IX
10. E-MAIL from William G. Bailey dated 22 March 2007, SHEP, Decision on Model-To-Marsh Revisions
11. E-MAIL from Ed Eudaly dated 27 March 2007, SHEP, Decision on Model-To-Marsh Revisions
12. E-MAIL from Heinz Mueller dated 02 April 2007, SHEP, Decision on Model-To-Marsh proposal
13. E-MAIL from Joseph T. Hoke dated 02 April 2007, SHEP, decision on M2M
14. E-MAIL from Thomas A. Garrett dated 02 April 2007, SHEP, decision on M2M
15. E-MAIL from William G. Bailey dated 26 March 2008, SHEP, Cooperating Agencies
16. E-MAIL from William G. Bailey dated 03 April 2009, SHEP, Monitoring and Adaptive Management Plan
17. E-MAIL from William G. Bailey dated 06 July 2009, SHEP, 30 April Executive Steering Committee Meeting
18. MFR dated 4 December 2008, Revised 11 December 2008, SHEP, Interagency Coordination Meetings
19. E-MAIL from Curtis M. Flakes dated 10 December 2008, SHEP, Executive Management Group, Steering Group Meeting
20. MFR dated 18 December 2008, Revised 16 February 2009, SHEP, Executive Management Group (EMG) Meeting
21. MFR dated 18 February 2009, Revised 31 March 2009, SHEP, 17 February 2009 Executive Steering Committee (ESC) Meeting
22. MFR dated 2 April 2009, Revised 6 April 2009, SHEP, Regional Federal Resources Agency Meeting
23. MFR dated 14 April 2009, SHEP, Technical meeting with EPA on 08 April 2009
24. MFR dated 21 August 2009, SHEP, Executive Steering Committee Meeting, August 20, 2009
25. MFR dated 3 December 2009, SHEP, Executive Steering Committee Meeting, 9 November 2009
26. LETTER from NOAA dated 4 February 2010
27. MFR dated 02 April 2010, SHEP, Executive Steering Committee Meeting, 2 April 2010
28. MFR dated 17 September 2010, SHEP, Executive Steering Committee Meeting, 17 September 2010

29. MFR dated 16 December 2010, SHEP, Executive Steering Committee Meeting, 16 December 2010

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
LCA meeting, 22 April 02

1. Doug was sick and not able to attend, so I chaired the meeting. We used the agenda that Doug had prepared and distributed.

2. We did not have a copy of the Action Items from the March meeting, so we skipped this item.

3. PMP.

The Corps and GPA continue to work on this. No updates have been distributed to the LCA since March. The USFWS, EPA and NMFS each stated that they had no major concerns with the contents of the March version.

4. Hydro Model.

- Letters from the agencies are to include any comments they may have on limitations on the application of the model.
- Letters are due to the Corps by the end of May.
- The USFWS stated there appears to be a lack of data for certain stations that were listed in the Expectations Document. Bill Bailey agreed to send an email requesting preliminary comments by Noon Thursday (25th) and forward them to GPA/ATM that day, so ATM could be prepared to discuss them at the SMART meeting on 1 May.
- Sea level – A height will need to be selected to model future conditions. ATM stated that a ½ foot rise had been observed at Savannah over the past 50 years. The Corps requested the agencies provide comments on using that same rate for future years on this project. GPA suggested someone check to make sure whatever value we select is consistent with the Federal (Washington-level) position on sea level rise. The Corps will check with HQUSACE.
- Agencies are to provide any suggested model runs to the Corps.

5. Agency Position Regarding SEG.

- The Corps informed the other agencies of what the SEG Operating Guidelines Committee intends to recommend to the SEG concerning development of a consensus mitigation plan. That recommendation is that the SEG (1) receive reports from GPA on the status of the project's investigations and evaluations, and (2) conduct a brainstorming session to identify mitigation options that the project's scientists could use when developing mitigation plans.

- NMFS stated that the SEG provides enhanced public input for this project, but that they cannot make decisions for the Federal agencies. The LCA agreed.
- The LCA agreed that the SEG is advisory to GPA.

6. General Reevaluation Scoping Meeting.

I informed the other Federal agencies that a meeting would be coming up – currently scheduled for mid-July – where all levels of the Corps would be gathering to review the PMP and the scope of the GRR/EIS. The Corps requested that the other Federal agencies participate in that meeting.

7. D.O. Model Schedule:

The Corps stated that because of EPA's needs, completion of the model on the schedule is VERY important. GPA said they were aware of the schedule's importance.

8. NEPA Scoping.

- We discussed the package the Corps had prepared and distributed prior to the meeting containing the public comments received and Savannah District's interpretation of the need for additional studies.
- The Corps requested the Agencies submit any comments they had on that package to me in a week – by 29 April.
- The Corps stated that we continue to receive additional letters, most of which address cultural resource issues. The letters raise no new issues. The Corps proposed that those letters would not be forwarded to the rest of the LCA unless a particular letter raised a new issue. The LCA agreed to that approach.
- The Corps distributed a document containing an initial list of commitments identified in the Tier I EIS Appendix H. Another version will be distributed later when the document is complete.

9. Plan Formulation.

I distributed another version of the Plan Formulation document. A previous version had been distributed to the LCA with a request for comments. The USFWS had submitted a comment, and it had been incorporated into the present version. The LCA was informed that this document represented only a "work in progress". They will be provided with another version when the Corps and GPA have made additional progress.

10. Vision Statement.

- The Agencies Vision statement had been incorporated into the Plan Formulation document. GPA it thought that some items in the statement were items that the project was required to accomplish, and that, therefore, they questioned whether those items should be in such a statement. GPA will continue to review the Vision Statement.
- The LCA agreed that some of the statements were not prescriptive requirements for the project, but instead were goals that they hoped the project could accomplish.

11. ACTION ITEMS.

- a. Bill Bailey would send an email requesting preliminary comments from the Federal Agencies on the Hydro Model by Noon Thursday (25th). **STATUS:** Requested on 23 April.
- b. Bill Bailey will forward the comments to GPA/ATM by COB 25 April. **STATUS:** Done on 25 April.
- c. Bill Bailey will check with HQUSACE on both the Corps and Federal position concerning sea level rise.
- d. Agencies are to provide any suggested Hydro Model runs to the Corps.
- e. Agencies will submit any comments they have on the NEPA scoping package to the Corps by 29 April.
- f. The Corps will forward to the rest of the LCA any new letter that raises a new issue.
- g. The Corps will forward another version of the Plan Formulation document to the LCA when additional progress has been made.

William Bailey
Physical Scientist

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Lead & Cooperating Agency meeting, 16 June 05

1. Alan Garrett (PM) was not able to attend, so I chaired the meeting. A list of attendees is attached. We covered two main topics: (1) Overview of recently revised schedule, and (2) Overview of Corps presentation to Principal's Group.
2. **Revised Schedule.**
 - The PDT had met the previous two days to conduct a thorough review of the study schedule. The extended study duration continues to increase the study costs. The goal of the Savannah District Engineer is to shorten the schedule to allow him to send the Final Report out from the District by Jun 07.
 - I explained that the 2-day review had resulted in us being able to shorten the schedule somewhat. The changes resulted from (1) starting some tasks earlier, and (2) a new philosophy for the document we would provide the Corps Headquarters prior to the Alternative Formulation Briefing. That document will now be a partial report instead of a full report. The Alternative Formulation Briefing is where the Corps decides whether the project has been sufficiently defined so that we can proceed and obtain the public's views on a Draft Report. No changes were made to the technical work to be performed.
 - The USFWS stated that it did not object to a faster schedule as long as the scientific work and technical analyses are not compromised.
 - The Corps requested the other agencies review the schedule and let us know if they can identify any other ways to advance the schedule.
3. **Corps presentation to Principals Group.**
 - I went over the presentation the Corps intended to give to the Principals Group the following week (23 June).
 - The coming meeting will basically be an information meeting – to inform the staff at the Washington level about this project.
 - The presentation is an update of one that the Corps had given to the Executive Management Group in November 03.
 - We would be saying that (1) we are trying to obtain agreements from agencies as we go along, instead of just at the end, (2) we think the interagency coordination is going well, and (3) we believe that the project is conducting good science.

William Bailey
Physical Scientist

SAVANNAH HARBOR EXPANSION PROJECT

LEAD & COOPERATING AGENCY MEETING

16 JUNE 2005

ATTENDEES

Ed EuDaly	USFWS - Charleston
Tom Prusa	USFWS – Savannah Coastal Refuges
John Robinette	USFWS – Savannah Coastal Refuges
Susan Rees	USACE – Mobile
Roger Burke	USACE – Mobile
William Bailey	USACE – Savannah
Hope Moorer	GPA
Larry Keegan	Lockwood-Greene Engineers / GPA
Tom Chase	Moffatt & Nichol / GPA
John Lesnik	Moffatt & Nichol / GPA
Gerald Miller	EPA (by phone)
Miles Croom	NMFS (by phone)

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Lead & Cooperating Agency meeting, 08 March 07

1. The meeting was called to learn more about a proposal (attached) to revise the Model-To-Marsh (M2M) component of the Marsh Succession Models. Alan Garrett, Corps Project Manager, chaired the meeting. A list of attendees is attached.
2. Bill Bailey provided an overview of the problem.

The Corps has successfully run the Marsh Succession Models to identify changes in wetlands from the various channel deepening scenarios. These are the "impact" runs. As we applied the models to the mitigation scenarios, we observed unexpected results. For some mitigation scenarios, the EFDC runs predict a decrease in salinity but the MSMs show shifts to more saline wetland species. Upon further inspection, we observed that on those runs the M2M component was providing higher root zone salinity values than were occurring in nearby rivers. The M2M extrapolates riverine salinity values from seven sites to root zone salinity values across the entire marsh surface. Apparently the limited number of points from which the M2M is starting its extrapolation leads to inaccuracies in mitigation scenarios that substantially alter flows between the three rivers (Front, Middle and Back Rivers). The M2M takes higher salinity levels on the Front River and uses them as a basis for incorrectly predicting higher salinity levels in portions of Middle and/or Back Rivers.

3. We described two avenues through which the project could move forward.

In Option 1, we would use the EFDC salinity model to identify wetlands that shift from fresh to brackish species. We would do this by examining what marshes change from <0.5 ppt to > 0.5 ppt salinity. We would apply that technique to both the "impact" and "mitigation" runs. We would use the MSM to provide more detail on the vegetation changes on the "impact" runs, thereby checking the EFDC results and increasing our confidence in the EFDC results. We would not use the MSM for "mitigation" runs.

In Option 2, we would use the EFDC salinity model to identify wetlands that shift from fresh to brackish species. We would apply that technique to both the "impact" and "mitigation" runs. We would revise the M2M as proposed and apply the MSM on both "impact" and "mitigation" runs.

4. Paul Conrads and Ed Roehl provided an overview of the proposed SOW to revise the M2M. This write-up is only a small part of the description Paul and Ed provided.

The present M2M starts with river flows and tidal conditions. It adds to that foundation riverine salinity values from the EFDC model. The present M2M could be considered more a far-field approach since it uses a limited number of riverine salinity values and extrapolates them across the entire marsh surface. It determines a relationship between river salinity and the well gages through time-delayed input signals and moving window averages between river salinity and pore-water salinity. The M2M was designed to primarily identify changes in root zone salinity that occur longitudinally in the estuary (along the length of the river).

The proposed revisions would allow the M2M to better identify lateral changes in root zone salinity that occur across the estuary (between different rivers or away from a single river). These revisions would start with a more detailed network of river salinity stations. It would then extrapolate those values to nearby areas of marsh. This could be considered more of a near-field approach. Additional marsh well data would be obtained to establish strong relationships between river and marsh root zone salinities. The Q-zone approach would be used as a starting point for the river to marsh flow paths. An interagency panel would be used to identify those pathways and guide the model revisions.

Uncertainty in the results of this M2M revision include three components: (1) Quality of the original data, (2) Quality of the data used to forecast or hindcast to fill in missing data, and (3) Quality of the data from EFDC. These are the same sources of uncertainty with use of the present M2M. This revision will require development of additional synthetic data to fill in records for the extra river sites that will be used.

5. The group then asked questions of Paul and Ed Roehl about the proposed work.

What will be the reliability of the results when using more synthetic data? Would the public accept the use of more synthetic data? RESPONSE: The reliability will not be known until the model is produced. However, data for the existing M2M show it is highly reliable for use with the present configuration of the estuarine rivers. As with any model, the ultimate accuracy of the revised model's predictions would not be known until after post-construction monitoring is performed.

What will be the reliability of the results when using data from the GPA stations? Those data were determined to be unacceptable in development of the existing M2M. RESPONSE: Data from the GPA stations were not used in the existing M2M primarily because of their short period of record. A much longer – and therefore more reliable – record exists for the USGS gages. The GPA stations would be used in the model revisions to provide a finer grid of river locations from which to extrapolate salinity levels across the marsh surface. The finer grid should increase the accuracy and reliability of the model predictions within specific marsh areas. The additional stations

would also allow a more detailed quantification of the sensitivity of marsh areas to local riverine conditions. The GPA stations also provide data obtained during 1997 – the flow conditions that are being modeled during the mitigation analyses. The reliability of the revised models would not be known until they are developed.

What are the differences between the GPA stations, marsh gages, and USGS gages?

RESPONSE: The differences include both duration and density. The marsh gages provide salinity information in the marsh root zone at 7 sites from 1999 to 2005 and 10 GPA sites from 1999 to 2002. The GPA stations have 14 riverine stations with data from portions of 1997 and 1999. The USGS gages provide salinity information at 4 riverine sites for many years.

What will be the reliability of the final predictions if the development of the revised model includes extensive synthetic data? RESPONSE: Models are regularly developed and applied when only limited actual data exists. Synthetic data is an accepted technique in the modeling community when insufficient historical data exists.

If new algorithms need to be developed for each mitigation plan, it could appear that we have developed a model just to show the results we want on the plan we want. If the same model is not used to evaluate all plans, how can we ensure we are evaluating all plans to the same degree of accuracy? RESPONSE: The same procedures would be followed to evaluate all plans, even if the models differ.

The existing M2M and its algorithms appear to work well with the present river configuration. If new algorithms only are effective for the mitigation plans that substantially modify river flows, how can we ensure their accuracy? RESPONSE: The change from a “far-field” approach to a “near-field” approach increases the likelihood that the revisions would be accurate when flows are substantially modified. The reliability of the results will not be known until the models are developed.

The MSM provides more detailed information on expected wetland changes than does the EFDC model. Do we really need those more detailed predictions for each mitigation scenario? RESPONSE: If reviewers want the detailed information, the revised M2M is the only way to obtain it.

Although a provisional version may be available in 5 months, the project will need a fully accepted version before it could release a report containing results using this approach. The final report is scheduled to be available in 12 months. If complications occur that delay the work, the date would extend further. A 12-month delay in the project would be a major impact to GPA. RESPONSE: Reaching a timely decision on this project is a goal of all the Cooperating Agencies.

The proposed revisions would likely extend the duration of the project. That extension may decrease the reliability of other analyses, requiring they be updated. That would require additional time and money. RESPONSE: Reaching a timely decision on this project is a goal of all the Cooperating Agencies.

Some of the mitigation scenarios appear to decrease the tidal range. The USFWS may not be able to support those plans as a substantial decrease in the depth of flooding over the marsh may adversely affect nekton use of those areas. The plans which have the most effect on tidal range are the ones that substantially alter flows between the three rivers.

RESPONSE: The proposed M2M revisions would not be beneficial if the final mitigation plans do not include measures that substantially alter flows between the three rivers.

Have the status and trends of wetlands since the last harbor deepening been taken into account? RESPONSE: Both the M2M and the MSM are based on data obtained since the last deepening.

Would the proposed revisions be necessary for the post-construction monitoring and adaptive management? RESPONSE: The EFDC will be used to ensure that changes in riverine salinity that are predicted are not exceeded. The existing M2M and MSM could be used to provide a perspective on what should have been expected in the wetlands with the observed flows if no further deepening occurs.

William Bailey
Physical Scientist

SAVANNAH HARBOR EXPANSION PROJECT

LEAD & COOPERATING AGENCY MEETING

08 MAR 2007

ATTENDEES

Ed EuDaly	USFWS – Charleston	(by phone)
Ted Bisterfeld	EPA Region 4	(by phone)
Kay Davy	NOAA Fisheries - Charleston	(by phone)
Alan Garrett	USACE - Savannah	
Joe Hoke	USACE – Wilmington/Savannah	
Hugh Heine	USACE – Wilmington	(by phone)
Elizabeth Godsey	USACE – Mobile	(by phone)
William Bailey	USACE – Mobile/Savannah	
Hope Moorer	GPA	(by phone)
Larry Keegan	Lockwood-Greene Engineers / GPA	(by phone)
Morgan Rees	Rees Engineering / GPA	(by phone)
Paul Conrads	USGS – Columbia	(by phone)
Ed Roehl	Advanced Data Mining	(by phone)

Estimation of Pore-water Marsh Salinities for Harbor Reconfiguration Scenarios

By

Paul Conrads, U.S. Geological Survey – Water Resources Division

Edwin Roehl, Advanced Data Mining, LLC

Wiley Kitchens, U.S. Geological Survey – Biological Resources Division

Zachariah Welch, Florida Coop Unit, University of Florida,

INTRODUCTION

Under sponsorship from the U.S. Army Corps of Engineers (USCOE) and the Georgia Ports Authority (GPA), the Lower Savannah River Estuary and the surrounding freshwater tidal marshes of the Savannah National Wildlife Refuge (SNWR) have been studied for years by a variety of governmental agencies, water users, universities, and consultants. Their interests are in maintaining water quality and predicting the potential impacts of a proposed harbor deepening on the estuary and tidal wetlands. Two major initiatives were the development of a three-dimensional hydrodynamic model (3DM) by a team of hydrologists, and the development of a marsh succession model (MSM) by a team of plant ecologists. The 3DM predicts changes in riverine water levels and salinity in the system in response to potential harbor changes. The MSM predicts plant distribution in the tidal marshes in response to changes in the water-level and salinity conditions in the marsh. A mechanism for linking riverine and marsh behaviors was needed.

To support 3DM and MSM development, many disparate databases were created that described the natural system's complexity and behaviors, but these databases had not been compiled into a usable form. Variables having particular relevance include those describing bathymetry, meteorology, streamflow (Q), water level (WL), specific conductance (SC), water temperature (WT), and dissolved oxygen concentration (DO). Most of the databases were composed of time series that varied by variable type, periods of record, measurement frequency, location, and reliability. Scientists recognized that data-mining techniques, which include artificial neural networks (ANN), could be used to link riverine and marsh behaviors.

To link the riverine predictions of the 3DM to the MSM, a "model to marsh" (M2M) model was developed by the U.S. Geological Survey and Advanced Data Mining (ADM) using data mining techniques that included ANN models. The ANNs simulated riverine and marsh water levels and salinity in the vicinity of the SNWR for the full range of 11½ years of data from riverine and marsh gaging networks. With M2M, the 3DM and MSM comprise an integrated decision support system for use by various regulatory and scientific stakeholders. The development and application of the M2M is described in Conrads and others (2006).

The M2M has been successfully applied to evaluate the effects of deepening the harbor by generating the inputs to the MSM from the outputs of the 3DM. The M2M also has been used to evaluate potential mitigation scenarios for minimizing the impacts from

harbor deepening. These mitigation scenarios included minor and major changes in channel configuration and flow distribution in the system.

PROBLEM STATEMENT

Eight mitigation scenarios that involve major structural changes in the vicinity of the SNWR, such as the installation of flow diversion structures and the cutting and filling of channels, have been proposed for evaluation. The M2M was not designed to accommodate mitigation scenarios that involve major structural changes. Currently (2007) there is not a mechanism for reliably estimating pore-water salinities in the marsh from riverine inputs for these major mitigation scenarios.

The responses of the SNWR to major changes are very likely to be different from any behaviors ever manifest in the historical record. While the 3DM can be configured to estimate riverine WL and SC with the major changes, it is limited to riverine estimates and cannot be credibly configured to estimate pore-water salinities in the marsh. Using data mining techniques, Conrads and others (2006) found that pore-water salinities integrate riverine WL and salinity variability over several months and often there are long time delays between riverine salinity conditions and marsh pore-water salinity response. A new tool similar to the M2M, hereafter referred to as M2M.2, needs to be developed to estimate pore-water salinity concentrations to evaluate mitigation scenarios involving major structural changes. To provide the necessary technical input and agency review, it is proposed that a multi-agency and multi-disciplinary technical working group be formed of the USGS-S.C. Water Science Center (USGS-SCWSC), the USGS-Florida Coop Unit (USGS-FCU), U.S. Fish and Wildlife Service (USFWS), U.S. Army Corps of Engineers (USACOE), and Advanced Data Mining (ADMi).

OBJECTIVES

There are three objectives for this project.

1. *Develop new marsh salinity estimation models* - for estimating pore-water salinities at marsh gaging sites for various mitigation model scenarios, using either measured or predicted river water level and specific conductance data at gage locations. It is possible that algorithms would have to be developed for each mitigation scenario.
2. *Develop new salinity spatial interpolation scheme(s)* - that estimate salinities throughout the SNWR from the USGS marsh gaging sites. The current scheme is embedded in the M2M's two-dimensional visualization and gridding application (2DVG). The new schemes must reflect greater lateral variation in the pore-water salinity than the current scheme. It is possible that new schemes would be created for each mitigation scenario.
3. *Develop M2M.2 2DVG and Simulator Applications* - to deploy the work products from Objectives 1 and 2. This includes adapting the 2DVG and the M2M Simulator, which estimates salinities at the USGS marsh gages.

SCOPE

The scope of this study is to address the relation between the riverine salinity and the pore-water marsh salinity for harbor deepening mitigation scenarios. The study's major tasks are described below.

- Task 1** *Develop Pore-water Estimation Matrix* – that defines the usable permutations of input USGS or GPA river gages to estimate salinities at each marsh gaging station for each mitigation scenario. Consideration will be given to the proximities of gages and flow diversion structures, and the overall quality of input gage measured, forecasted, and hindcasted data used for developing or generated by the M2M.
- Task 2** *Develop predictive models* - for each permutation defined in Task 1. This involves determining optimal time delays and moving window averages between river salinity and pore-water responses through correlation analysis. ANNs provide the best possible correlations in terms of the process information they provide and their prediction accuracy. The number of models to be developed depends on the permutations defined in Task 1.
- Task 3** *Define area of influence and spatial gradient of the USGS marsh gages* - for the new salinity spatial interpolation scheme.
- Task 4** *Develop M2M.2 2DVG application* - to reflect findings from Task 3. It is likely that multiple visualizations and grids will need to be developed to accommodate all of the mitigation scenarios.
- Task 5** *Develop M2M.2 Simulator* – like M2M, it will integrate the 3DM with the MSM using the models from Task 2 and the M2M.2 2DVG application from Task 4, but tailored for the mitigation scenarios involving major structural changes.
- Task 6** *Document the approach and results.*

RELEVANCE AND BENEFITS

An important part of the USGS mission is to provide scientific information for the effective water-resources management of the Nation. To assess the quantity and quality of the Nation's surface-water, the USGS collects hydrologic and water-quality data from rivers, lakes, and estuaries using standardized methods, and maintains the data from these stations in a national database. Often these databases are under utilized and under interpreted for addressing contemporary hydrologic issues. The techniques used to develop the M2M and models of the Cooper River (Conrads and Roehl, 1999), the Beaufort River (Conrads and others, 2003), and the Pee Dee River (Conrads and Roehl, 2006) demonstrate how valuable information can be extracted from existing databases to assist local, state and Federal agencies.

The project benefits the Georgia Ports Authority and the Army Corps of Engineers by providing data analysis needed by water-resource managers to make decisions concerning mitigation of the Savannah River Estuary to accommodate potential deepening of Savannah Harbor. The project builds on previous studies relating river salinity to marsh pore-water response. This is consistent with primary USGS activities that include providing knowledge and expertise to assist various levels of government in understanding and solving critical water-resources problems.

TECHNICAL APPROACH

The historical data do not contain information explicitly about the impacts of the proposed mitigation scenarios involving major structural changes. For these circumstances, the best available data, tools, and human expert knowledge and experience must be brought to the problem. The development and use of the M2M.2, and related findings will provide the best possible resources for evaluating the major mitigation scenarios.

Available Data and Utilities from M2M Study

The M2M is based on river and marsh WL and SC ANN models for the USGS and GPA gaging stations in the river and marshes. These are empirical models and for a system as complex as the Savannah River estuary, it was critical that measured, not estimated, data were used that cover the greatest range of hydrologic and tidal responses. For making predictions of pore-water salinity, the most valuable data for M2M development were from the long-term USGS river and marsh gaging stations, which covered over 11 years and 5 years respectively, and comprise a range of flow conditions from drought to floods. Of lesser value were the GPA river and marsh data, which were limited to short measurement periods and a small range of hydrologic conditions. The USGS river data are the major inputs for the final pore-water salinity models and a few of the GPA stations are used to reduce the error in the pore-water models.

The M2M Simulator and 2DVG applications will be valuable for estimating pore-water salinity for the major mitigation scenarios. The Simulator integrates a collection of individual models of the GPA and USGS river gages with the various field databases, such that all of the WL and SC data from the river gages were individually modeled. By hindcasting and forecasting the short-term data collection periods at the GPA sites, a complete database was generated for the 11½ year period from 1994 to 2005. This feature was incorporated to allow scientists and managers to simulate any period from the last deepening and analyze system responses at any gage location. The 2DVG provides spatial interpolation-extrapolation and visualization of the marsh responses across the marsh wells. It is easily modified to accommodate new pore-water estimates at the USGS marsh sites and new interpolation-extrapolation schemes across the marsh.

Pore-water Estimates for Mitigation Scenarios

The MSM models use the growing-season average pore-water salinity as input. The measured, forecasted, and hindcasted SC records at the GPA river sites can be used in conjunction with the USGS sites to determine the best estimates of the average pore-water salinity during the growing season. Estimates will be based on the assumption that a marsh gage responds to nearby river gage(s) and that the candidate river gage(s) may vary by mitigation scenario. Often good correlations between two time series, such as river and marsh SC, can be obtained by adjusting the time delay and moving window average of the explanatory variable (river SC) to achieve the highest correlation with the response variable (marsh SC). For highly dynamic SNWR, trend information proved invaluable for estimating inertia-driven behaviors. Representing trends requires at least two input variables whose values represent two different times or two different locations at the same time, or both.

To estimate pore-water responses to mitigation scenarios, river sites will be selected as candidate explanatory variables for each mitigation plan. For example, the schematic for Mitigation Plan 5 is shown in figure 1. In this scenario, it is believed that salinity intrusion occurs further up the Front River and that freshwater flows increase down the Little Back River. The riverine gages closest to the Middle River 1 (M1) for estimating its pore-water salinity are GPA12 and GPA12r. For Back River 2 (B2), gages 8979, 89784, and GPA15 appear to be good candidates. Final river site selection will be based on the quality of the measured, hindcasted, and forecasted GPA data.

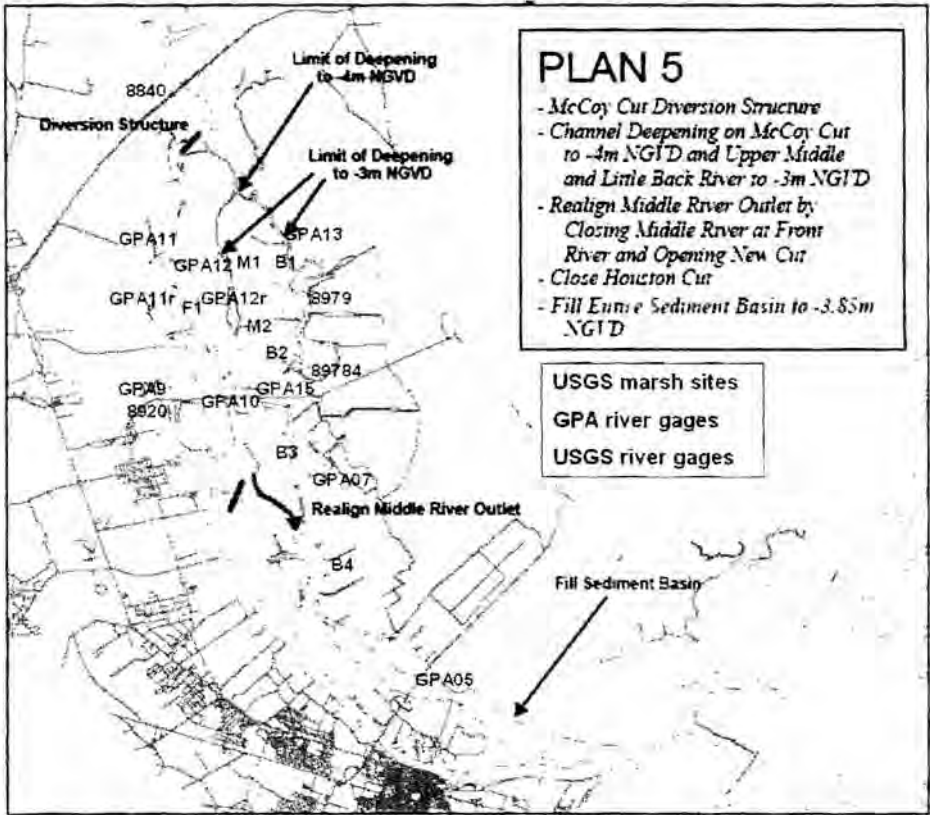


Figure 1. Locations of river and marsh gages and schematic of Plan 5 mitigation scenario

The Pore-water Estimation Matrix will be developed of mitigation plans, marsh gages, and candidate river sites. It is anticipated that some of the plans will share configurations of river gages to marsh gages. Pore-water estimates will be determined for each plan and the estimates will be compared with the predictions made with the original ANN models of the M2M.

Pore-Water Salinity Projections Across the Marsh

The time-series data of the individual marsh gages depict the longitudinal gradient of the system to various hydrologic and tidal conditions. The time-series data do not support the lateral gradients in the system. The M2M's 2DVG is based on estimates of the longitudinal variations from model predictions at the marsh sites. A simple interpolation scheme is used to estimate the lateral gradients.

For the mitigation scenarios, marsh wells will be assigned to the vegetative zones (Q-zones) depicted in Figure 2 and added to the Pore-water Estimation Matrix. Lateral variation across the marsh will be based on field experience and limited data taken during transect studies by the Florida Coop Unit (FCU) at the University of Florida.



Figure 2. Locations of Q-zones in the tidal marsh in the vicinity of the Savannah National Wildlife Refuge

Integration of Hydrodynamic Model and Marsh Succession Models – M2M.2

Like M2M, M2M.2 will integrate output from the 3DM and generate the marsh salinity grid for input to the MSM. Linking the 3DM is accomplished by reading in a file of simulated differences in SC values for the river for the mitigation plan scenarios. The use of differences, or deltas, from the 3DM increases the prediction accuracy of the model. Mechanistic model, such as the 3DM, typically are better suited from predicting relative differences between two conditions rather than making absolute predictions for one

scenario. The differences (deltas) from the 3DM are added to the historical time series for the scenario and then used in the M2M.2. The application estimates pore-water salinity at the marsh gages and the salinity grid is generated for input to the MSM applications.

Figure 3 describes the data and workflow from the 3DM, through the M2M.2 Simulator and 2DVG applications, and to the MSM. Here, the eight mitigation scenarios are handled separately, providing each with completely customized solution bearing the best ideas of the multi-disciplinary team. At left the 3DM is run for each scenario and separate output files are generated. Next at top center, in the M2M.2 Simulator the user selects the scenario to be run, the appropriate 3DM output file is loaded, the appropriate prediction models are engaged, a simulation is run, and an output file of marsh specific conductivities is generated. Next at right, in the M2M.2 2DVG the user selects the scenario to be run, the M2M.2 Simulator output file is loaded, and an output file of spatially interpolated marsh salinities is generated, which can be loaded into the MSM.

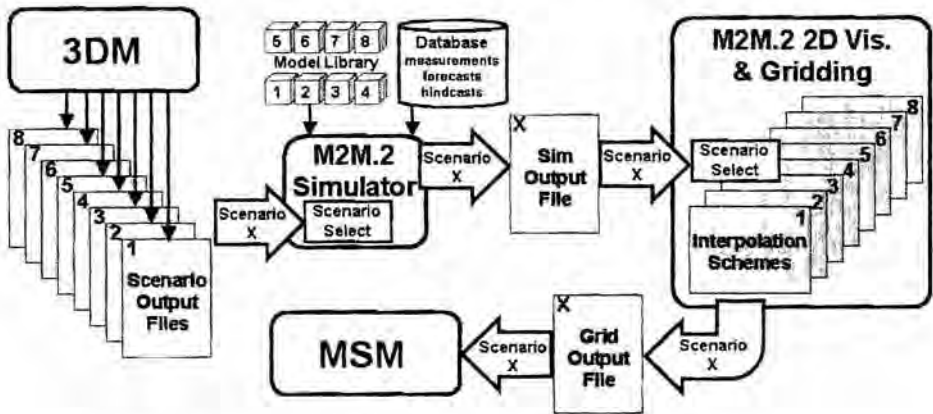


Figure 3. Schematic of data and workflow through the M2M.2.

UNCERTAINTY OF OUTCOME

In this technical approach, each scenario will have a custom solution developed by a multi-disciplinary technical team composed of the USGS-SCWSC, the USGS-FCU, the USFWS, USACOE, and ADMi personnel that are most knowledgeable in the issues, history, and science of the harbor deepening. As with the M2M, the behaviors and predictive performance of the new "local" models of the M2M.2 will be fully described to the technical team. The performance of the models is expected to be comparable to those of the M2M, with the major sources of uncertainty to be associated with the quality of the data collected from the GPA sites, the quality of the SC hindcasts and forecasts at the GPA sites, and the accuracy of the 3DM predictions.

Generally, the 3DM prediction accuracy of flow and salinity throughout the model domain are better on the Front River and lower portion of the system. The prediction

accuracy is not as good in the vicinity of the SNWF and farther inland in the system. This can be seen in the summary statistic of the model performance for the 50 percentile and the coefficient of determination for the 1999 calibration data and the 1997 validation data set (Tetra Tech, 2006). The accuracy of estimates made by the 3DM for scenarios involving major structural changes is unknowable *a priori*, but very likely to be less accurate than the calibration and validation prediction. The use of differences from the 3DM will reduce absolute prediction error by the model. The 3DM's performance will be the primary source of uncertainty, but significant reliance on its estimates inside the SNWR is unavoidable.

The technical team will leverage the tools in hand to formulate a process of mitigating deepening-related problems. The process may employ a succession of structural changes of varying impact severity. It is likely that each change will have surprising results that can only be determined *post priori* by continued field monitoring and data analysis. This suggests a conservative, iterative mitigation approach composed of these steps - hypothesize, change, test, review, and most importantly, learn will be required.

PROJECT COORDINATION

In making estimates of system responses to the structural changes in the SNWR, it is essential that the appropriate technical resources from the agencies be involved. It is proposed that periodic meetings of the technical working group (USCOE, USF&W, USGS-SCWSC, USGS-FCU, and ADMI) be scheduled to review interim products such as the pore-water estimation matrix, pore-water estimation models, and prototypes of the M2M.2 2DVG and M2M.2. Many of these meetings could be accomplished by teleconferencing.

REPORTING

The project will be documented in a USGS Open-File Report, tentatively titled "Estimation of Tidal Marsh Pore-water Salinity in the Vicinity of Savannah National Wildlife Refuge for Savannah Harbor Deepening Mitigation, Coastal South Carolina and Georgia." A provisional copy of the report will be available for colleague/cooperator review 3 months after the completion of the project. The review process will require an additional 5 months. A limited number of paper copies of the report will be provided to the cooperating agencies; however, the primary outlet for the publication will be the Internet. A link to the report will be posted on the USGS South Carolina Water Science Center web sites.

BUDGET AND SCHEDULE


The Project will be collaboration between the USGS-SCWSC, the USGS-FCU, and ADMI. The project will take approximately 4-5 months to complete the technical analysis and develop the provisional M2M.2 from the start date. The final documentation of the project will be complete approximately 10-12 months from the start date. The total cost of the project will be \$110,750. An itemized description of the tasks and required hours

are listed in Table 1 and a timeline for completion of the project from initiation is presented in Table 2.

Table 1. Tasks, description, notes, hours, and costs.

Task #	Description	Notes	USGS-SCWSC Hours	USGS-SCWSC Cost	USGS-FCU Hours	USGS-FCU Cost	USGS-ADMI Hours	USGS-ADMI Cost
1	Develop Pore-water Estimation Matrix	tooling up, evaluate data quality, matrix development, meeting with Agencies to finalize matrix	40	\$4,400			40	\$5,000
2	Develop predictive models	upper limit = 8 scenarios x 7 models per = 56 models x 8hrs/model, use 50% - USGS-SCWSC to review	25	\$2,750			224	\$29,000
3	Define area of influence and spatial gradient of the USGS marsh gages	mostly USGS-FCU with assistance from USGS-SCWSC, ADMI to assimilate, meeting for concurrence with Agencies prior to finalization	40	\$4,400	64	\$6,400	12	\$1,500
4	Develop M2M.2 2DVG application	assume 8 interp schemes to program/integrate at 2days per - USGS-SCWSC to review	25	\$2,750			128	\$18,000
5	Develop M2M.2 Simulator	assume 4 weeks for mostly new but derivative app programming and testing - USGS-SCWSC to rev	25	\$2,750			160	\$20,000
6	Document the approach and results	mostly USGS-SCWSC and USGS-Publications Unit, ADMI and USGS-FCU to assist	120	\$13,200	16	\$1,600	16	\$2,000
Totals			275	\$30,250			580	\$72,500

Table 2. Timeline for completion of project.

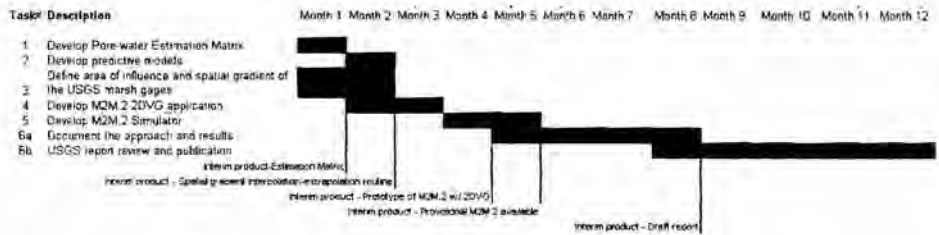

REFERENCES

- Conrads, P.A. and E.A. Roehl, 1999, Comparing physics-based and neural network models for predicting salinity, water temperature, and dissolved oxygen concentration in a complex tidally affected river basin, South Carolina Environmental Conference, Myrtle Beach, March 1999.
- Conrads, P.A., Roehl, E.A., and W.P. Martello, 2003, Development of an empirical model of a complex, tidally affected river using artificial neural networks, Water Environment Federation TMDL Specialty Conference, Chicago, Illinois, November 2003.
- Conrads, P.A., Roehl, E.A., Daamen, R.C., and W.M. Kitchens, 2006, Simulation of water levels and salinity in the rivers and tidal marshes in the vicinity of the Savannah National Wildlife Refuge, Coastal South Carolina and Georgia, U.S. Geological Survey Scientific Investigations Report 2006-5187.
- Conrads, P.A. and Roehl, E.A., 2006, An artificial neural network-based decision support system to evaluate hydropower releases on salinity intrusion, *Hydroinformatics 2006*, edited by Philippe Gourbesville, Jean Cunge, Vincent Guinot, Shie-Yui Liong, Vol. 4, p.2765-2772
- Tetra Tech, 2006, Development of the hydrodynamic and water quality models for the Savannah Harbor Expansion Project. Prepared for the U.S. Army Corps of Engineers – Savannah District, Tetra Tech, Inc. Atlanta, Georgia.

CESAS-PD-E

26 June 2007

Revised 29 June 2007

Revised 03 Aug 2007

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project;
Interagency Coordination Meeting
Record of 20-21 June meeting

PARTICIPANTS:**NAME****REPRESENTING**

Ed Eudaly	USFWS-Charleston
John Robinette	USFWS-Savannah NWR
Kay Davy	NOAA-Fisheries
Brad Gane	GA DNR-CRD
Kelie Moore	GA DNR-CRD
Matt Thomas	GA DNR-WRD
Tim Barrett	GA DNR-WRD
Paul Lamarre	GA DNR-EPD
Chris Beckham	SC DHEC-Columbia
Wade Cantrell	SC DHEC-Columbia
William Bailey	USACOE-Mobile
Paul Bradley	USACOE-Mobile
Joe Hoke	USACOE-Wilmington
Beth Williams	USACOE-Wilmington

OBSERVERS:

Hope Moorer	GPA
Larry Keegan	GPA/CH2M Hill

1. The meeting was held at the Armstrong Center in Savannah on June 20-21. The agenda is attached at the end of this document. This summary does not include all the items that were discussed during the meeting, but summarize important points and decisions that were reached.

2. The meeting was called to (A) review information in the previously distributed impact and mitigation reports, (B) determine what information is most representative, and (C) identify appropriate mitigation.

3. We began by discussing impacts to **wetlands**. We first discussed the percent exceedence information on salinity. The Corps passed out handouts that USGS (Paul Conrads) had prepared that show the agreement between surface salinity values from the Model-To-Marsh (M2M) Model with those calculated by the hydrodynamic model (EFDC) and (when available) data measured in the marsh root zone. We reviewed data for stations in Front, Middle, and Back Rivers, and both average (1997) and low river flows (2001). The 50%-tile exceedence value was identified as being the best single measurement across the range of stations of flows. It was more accurate than the 10%-tile exceedence values (90% on distribution frequency) and therefore the best single exceedence value. Therefore, the group agreed for the Corps to use that parameter (50%-tile exceedence value) when assessing surface salinity levels for wetland effects.
4. We then reviewed **river flows**. Average river flows generally represent 50% of the flow distribution, while low flows and high flows each represent other 25% portions of the flow. Since average conditions represent more of the entire range of flows, the group reaffirmed our previous decision to use that condition in our basic impact evaluation.
5. We discussed **sea level rise**. As requested by the agencies, the reports contain information on conditions with both a 25 and 50-cm rise in sea level. The 25-cm rise is roughly the average of the range of sea level rise predictions for this area over the next 50 years. The 50-cm rise is at the high end of predictions for that time period. Both of those conditions would occur at the end of the 50-year planning time horizon. The group agreed that we should conduct our basic impact evaluation using conditions that would occur near the time of construction. Therefore, we decided to use the existing sea level for the basic impact evaluation.
6. We then discussed **mitigation for wetland impacts**. The evaluation procedure we have available uses the position of the 0.5 ppt surface salinity as the distinction between the locations of fresh and brackish marsh. The 0.5 ppt salinity value is a commonly accepted threshold between those two types of marsh vegetation. With the flows into tidal creeks that serve a large area of marsh, the procedure is essentially an ON/OFF switch for impacts. Because of this, the procedure shows irregular wetland impacts (rather than a smooth consistent increase) with increasing salinity levels. To address this we distributed information we had just prepared showing the effects of ranges of salinity (-0.5, 0.5-1, 1-2, 2-4, >4 ppt). This new format provides information on the effects on low salinity brackish marsh. This format requires someone to extend salinity contours from the rivers out into the marsh. Although drawing this contour is somewhat subjective, the group felt that it was acceptable if all the extrapolation is performed using the same criteria. Use of a single analyst (using the same criteria) would further normalize the results. One member suggested we graph the incremental wetland

acreage by river mile for each of the 3 rivers (Front, Middle, and Back). This could remove some of the subjectivity of drawing contours. The group requested we provide the salinity range information for all the depth alternatives and that we include columns showing the net acreage effect on each of these 5 wetland categories.

Plans that substantially reroute flows within the estuary were found to reduce the tide range upstream of the Houlihan Bridge. Some plans reduce the range 0.2-0.3 meters, while others reduce it 0.3-0.5 meters. USGS (Wiley Kitchens) measurements showed 1-1.5 feet of flooding of the freshwater marsh sites. One suggestion was to recalculate the marsh impacts with marsh elevations included. The USFWS expressed its opposition to conversion of freshwater wetlands to uplands. The USFWS also expressed concern that the loss of flooding over extensive marsh areas would eliminate use of those areas by small fish. Because of these concerns, we agreed to drop consideration of Plans 4, 5, and 8 and concentrate on Plans 1-3. The Corps would proceed with its modeling of Plans 6 and 7 using Plan 3 as a base.

The Corps provided the following information on the diversion of water from the Savannah River into the Middle and Back River system:

	48-foot Channel	48-foot Channel + Plan 1
<u>River Flow</u>	<u>No diversion</u>	<u>(With Diversion Structure)</u>
McCoys Cut	583 cfs	1130 cfs
Little Back River	429 cfs	646 cfs
Middle River	333 cfs	663 cfs

These numbers are based on average flows down the Savannah River.

We then discussed **restoration or compensation for wetland impacts**. The USFWS reiterated its position that because of previous losses over time, we cannot afford to lose additional tidal freshwater wetlands. They stated that due to the large historic loss of tidal freshwater wetlands within the estuary, they would not consider any out-of-kind replacement as acceptable mitigation for project impacts to the remaining tidal freshwater wetlands. Acquisition and conversion of the Poindexter property was discussed. The property site is located on the eastern side of the Refuge and is presently managed by private landowners for waterfowl hunting. Diked portions of the site are seasonally flooded from the freshwater diversion canal. In the past, crops were grown in the diked areas during the summer before they were flooded in the fall. We understand that if the participants the owners use have shifted to moist soil management practices similar to those used - acquisition and management of the site by the Fish and Wildlife Service to operate their impoundments. Based on that information, Federal acquisition and management would may not provide substantially different environmental values. This would substantially reduce the number of - In that case, few wetland mitigation credits could be claimed for Federal acquisition. In 2006, the owners were approached with an offer to sell the property for development, so there is a threat that the property may be developed in the near future. An imminent threat of development is a factor which increases the amount of mitigation credits which can be claimed for protecting a site. The USFWS is interested in ownership of the property, but the site is not presently within

their approved acquisition boundary. If the property is acquired and the dikes retained, the Federal ownership would protect the site from development and result in the diked areas being considered managed wetlands. The dikes would control water access to the site, so that acreage could not be considered tidal freshwater wetlands. The controlled access would mean that those acres would not provide the fishery habitats provided by natural wetlands. Those fishery functions would have to be made up separately. If the property is acquired and the dikes removed, brackish marsh would move in and occupy the previously diked areas. Since nearby brackish marsh provides high ecological values for fisheries, removal of the dikes could receive substantial credit for fishery habitats. NOAA-Fisheries prefers removal of the dikes if the property is acquired. (Note: This wording reflects subsequent discussion between the USFWS, NOAA-Fisheries, SCDHEC, and the COE on 18 July.) If crops are still grown during the summer, Federal acquisition would increase wetland functions and be creditable as mitigation. The USFWS, NOAA-Fisheries, and SCDHEC agreed that conversion of the diked agricultural lands into managed freshwater wetlands (like USFWS Refuge operations) could be credited as mitigation for wetland losses. We agreed that such conversion would not compensate for fishery functions provided by wetlands. Those impacts would have to be made up separately.

The USFWS is interested in acquisition of upriver areas that are already within their approved acquisition plan. They stated that such acquisition would not be acceptable for loss of tidal freshwater wetlands.

The vast majority of all the present tidal freshwater marshes are located within the Savannah National Wildlife Refuge. The group agreed that all tidal freshwater marshes within the Refuge possess the same ecological value.

The USFWS requested we include closing the lower (western) arm at McCoys Cut in future modeling of mitigation plans. They observed ebbing flows passing from McCoys Cut back out to the Savannah River. The hope is that closing that reach would increase flows down into the LBR/MR area. The Corps stated that if we pursue excavation of berms (previously deposited fill) along the banks of Little Back and/or Middle Rivers, placing those sediments in the lower arm would save substantial construction costs. Filling the arm would also result in creation of tidal freshwater wetlands. The USFWS said that the area needed to be surveyed for freshwater mussels. Subsequent to the meeting it was determined that a consulting firm with trained mussel divers would be required for this survey. The USFWS expressed concern about filling the lower arm and would rather see it plugged on the Little Back River side. That action would create a slough and provide fishery habitats for many years.

We discussed work at the Sediment Basin. The agencies have expressed concern about water quality (turbidity) impacts if sediments are directly deposited in the basin. The Corps said that initial modeling showed a narrow sill at the lower end of the basin would not stop salinity moving upstream with the tide. Momentum appears to carry the tidal flow over the top of a narrow sill and continue some distance upstream. The

mitigation modeling is based on the Sediment Basin being filled to the same depth as upriver of the Tidegate (depth of -3.85 meters). Constructing only a sill would reduce the beneficial aspects on salinity of removing the Basin from operation. Sediments that would be excavated during a harbor deepening are primarily sands. The sediment composition does vary by station and depth. Placing silty or clay-dominated sediments in the Basin with a hydraulic dredge could produce extensive turbidity. Placement of clay-dominated sediments with a clamshell would produce substantially less turbidity. Operations that produce more turbidity could be conducted during winter months which are less stressful to biota. We agreed to continue this discussion later.

7. We discussed impacts to **fisheries**. We started with Shortnose sturgeon. The modeling shows a deepening could reduce sturgeon habitat substantially. The adverse effects are most pronounced in the adult life stage during August. The wetland mitigation plans do not reduce those impacts. The impacts appear to be salinity related and not caused by reductions in dissolved oxygen. One method of mitigating for those impacts is to construct the fish bypass channel that had previously been proposed at the New Savannah Bluff Lock & Dam (NSBL&D). The group felt that this structure would help sturgeon, as it would open up new areas upstream for spawning. They believe it would also help American shad and other anadromous fish species. From an ecological perspective, removal of the NSBL&D would be more effective than implementing bypassing fish around the structure. The Corps explained that although Congress has not funded rehabilitation of the lock and dam (with its bypass), local governments continue to position themselves for the continued existence of that dam. The Corps would not consider proposing removal of that structure as part of this project unless someone first discusses the concept with a local government representative and obtains an indication that they would not oppose such a proposal. The group could not identify a method other than action at NSBL&D to mitigate for adverse impacts to this species. The Corps will coordinate further on this issue with the St. Petersburg office of NOAA-Fisheries.

We reviewed impacts to **American shad**. Those range from <1% loss of habitat in January and May to a loss of 7% in August with Plan 3. The out-migration of juveniles to the ocean would commence late summer and continue through fall and winter. Since the criteria for acceptable habitat for this species consists of only a dissolved oxygen level, the oxygen injection system should remove these impacts and likely result in net improvements in habitat volume.

We reviewed impacts to **Striped bass**, which result in roughly a 25% loss in acreage of acceptable habitat across the three life stages we examined – spawning, eggs, and larvae (50% flow, 6-foot deepening, Plans 1-3). GA DNR-WRD believes that average river flows (50%-tile) are appropriate for identifying project impacts.

Although the habitat criteria include several parameters, velocity and salinity seem to be the most important ones. The Corps examined ways to increase velocity in the LBR and MR areas. This included use of pilings, rocks, and additional flow volume. Increasing flow in the Savannah River during April by 500 and 1000 cfs did not result in

noticeable improvements. Further increases in flow are also not likely to be effective, as even flows at the 80% cumulative frequency level do not reduce the adverse effects of a deepening. The Corps will check the actual velocity numbers to identify the level of effect, as well as examining whether the velocity is above or below the defined threshold.

GA DNR-WRD requested we examine inclusion of a flow partitioning structure at the junction of LBR and MR as a potential adaptive management tool. This could allow us to modify the distribution of flows in that system to improve areas that provide more and/or better habitats for striped bass.

The Savannah River striped bass population is currently not used as the sole source of broodfish for GA's statewide striped bass stocking program. Both SC and GA recently opened the recreational fishery for this species. The stocking program appears to have been successful, as a good number of large adult fish occur in the estuary. Records indicate that some natural spawning has resumed in the last 2 year classes checked (2003 and 2004). Sixty percent of the 2004 year-class was naturally spawned. Dr. Bill Daven's 1999 report of egg transport identified 3 locations in the spawning area with a silty bottom substrate. GA DNR did not believe that further field study of that issue was needed. Questions were raised about the potential value of cleaning the sediments in those areas to make that area more productive. Unknowns about the flow velocities keep anyone from knowing whether the sites would silt back in again.

GA DNR-WRD and USFWS suggested we further examine closing the lower arm of McCoys Cut during future modeling. Ebbing flows have been observed passing from the lower arm of McCoys Cut (original channel) back out to the Savannah River. The hope is that closing that reach would increase flows down into the LBR/MR area. They also requested we examine not deepening through McCoys Cut. This may be a way of increasing velocities through that upper LBR/MR area.

The group could not identify any other physical action that could be examined to increase Striped bass habitats in the project area. If the 25% loss in habitat remains in the final plans, funding a striped bass culture/stocking program may be the only way to compensate for the unavoidable impacts to this species.

We reviewed impacts to **Southern flounder**. Habitat losses for this species are substantial (up to 47% with 6-foot deepening and Plan 5). However, since the criteria for acceptable habitat for this species consists of only a bottom slope and dissolved oxygen components, the oxygen injection system should remove these impacts and likely result in net improvements in habitat volume.

8. We discussed impacts to **water quality**. GA DNR identified two statements on page 7 in the Impact Report that were questionable. The Corps concurred that the wording should be revised and said that we would revise the wording when it is published in the GRR or EIS.

EPA is considering revising the water quality model in LBR and MR (6 layers to 1). SC DHEC reiterated that the water quality model was not optimized for that area and that the D.O. results for that area are better used on a comparison basis. The Corps said that if the model is revised, it would need a new calibration report that was independently reviewed before it could vary from the present model which has gone through that process. No participant knew if EPA had obtained new SOD samples, as recommended by SC and previously proposed by EPA.

GPA is conducting a demonstration project of a dissolved oxygen injection system starting at the end of July and running for 6 weeks. They will produce a report with the results of their monitoring program. Agencies suggested that the Corps incorporate information obtained during the monitoring into the final predictions for performance of the proposed D.O. systems.

The Corps stated that the Water Quality Team had previously recommended that the upper two locations identified in the Task II Report on the D.O. system not be constructed. Those sites were identified as being best from a modeling perspective, with no consideration for land availability. One of the sites (McCoys Cut) is located within the Savannah National Wildlife Refuge with no land access or power. The other (Mill Stone Landing) is located at an upriver site. The Corps intends to combine the oxygen proposed from those sites into others located more in the harbor area. The site at Houlihan Bridge would likely be expanded to compensate for eliminating those upriver sites. Another site could be required around the Sediment Basin. The final modeling will identify the most cost effective tradeoff of number of stations vs. total volume of oxygen to be added.

The Corps will try to find information on the success of the demonstration project of oxygen injection in a California harbor.

One comment on the siting of the oxygen injection facility near the Houlihan Bridge is that if the facility is located between the Front and Middle Rivers, the same facility could be used to improve oxygen in both rivers with lines going to each river. The only high ground with road access between Front and Middle Rivers is CDF 1N, which is located within the Savannah National Wildlife Refuge. The USFWS would have to find that use of the site compatible with the overall goals of the Refuge.

9. We discussed **monitoring and adaptive management**. The Corps distributed a framework for a monitoring and adaptive management plan for the project. The group decided that agencies should be involved in decisions about implementing adaptive management features. The public should be informed of the results of the monitoring, but could not assist in making Federal and State decisions.

There was a recommendation that we monitor forested wetlands. This would be helpful in ensuring that the project does not unexpectedly impact this resource. Another recommendation is that we include a flow partitioning structure at the junction of LBR

and MR. This could allow us to modify the distribution of flows in that system to improve areas that provide more habitats for Striped bass.

10. We discussed other **mitigation** measures. Filling the Sediment Basin (or allowing it to fill) would help low salinity marshes that provide extensive fishery benefits and display large species diversity. Removal of the Tidegate could affect the tide cycle and velocities upstream of that site.

The Corps should remove "Increase flows down the Savannah River" from its list of possible mitigation features. It should also remove "Modify Tidegate into fishing pier" from its list of possible mitigation features, as such a pier would have substantial liability concerns. It should also remove "Tybee NWR" from its list of possible mitigation features, as there is nothing this project could do to improve that Refuge. The Corps should move up in its priority list the measure to "Block western connection at McCoys Cut". We should add "Restore wetlands at CDF 1S" to the list. Depositing sediments in the nearshore area off Tybee would help Wassaw Island. Add as a possible Other Measure the cleaning of silty sediments in LBR and MR to restore the sandy bottom substrate so that it would be more suitable for Striped bass.

11. Kay recommended that the Corps initiate formal consultation with NOAA on Essential Fish Habitat and compliance with the Endangered Species Act, now that information on project impacts is available.

12. The meeting was beneficial. We were able to narrow the focus of our consideration of the data that has been produced. The Corps will perform some more modeling of project impacts. We agreed to evaluate the Tidegate (Plan 6) and Steamboat Cut features (Plan 7) based on Plan 3, rather than Plan 5. The Corps will evaluate the feasibility of grading down a high ground site to produce tidal freshwater wetlands. The Corps will provide the results of that work to the agencies when it becomes available.

// ss //

William Bailey
Physical Scientist

SAVANNAH HARBOR EXPANSION PROJECT

INTERAGENCY MEETING

JUNE 20 & 21, 2007

AGENDA

WEDNESDAY

OPENING & INTRODUCTIONS

9:30 – 9:45

- Purpose of Meeting
 - Review information in Impact and Mitigation reports
 - Determine what information is most representative
 - Identify appropriate mitigation

WETLANDS

9:45 – 12:00

LUNCH

12:00 – 1:00

WETLANDS (Cont)

1:00 – 3:30

FISHERIES

3:30 – 5:00

THURSDAY

FISHERIES (Cont)

8:30 – 10:00

WATER QUALITY

10:00 – 12:00

LUNCH

12:00 – 1:00

OTHER MITIGATION MEASURES

1:00 – 2:00

MONITORING & ADAPTIVE MANAGEMENT

2:00 – 3:00

WRAP-UP

3:00 – 3:30

SAVANNAH HARBOR EXPANSION PROJECT

VISION OF THE COOPERATING AGENCIES

THE TIER II PROCESS WILL:

- Determine the specific and differential incremental effects of each channel improvement alternative.
- Identify and evaluate impacts on the human environment, including impacts on natural resources, economics, and societal considerations (jobs).
- Contain studies that are conducted in a manner that leads to their technical acceptance by the scientific community.
- Clearly identify all benefits and costs for the decision-makers.
- Recognize that mitigation may be necessary for any or all of the identified impacts.
- If needed, recommend specific actions that should be taken outside the context of the Expansion Project to improve the local environment and/or compensate for past harbor improvement projects. The report would identify the process and participants to accomplish those specific needed actions.
- Be documented by a report that leads decision-makers to clear decisions on the project.

THE RECOMMENDED HARBOR IMPROVEMENT WILL:

- Produce positive economic benefits for the port community and have beneficial environmental effects.
- Include a mitigation plan that addresses unavoidable impacts to critical natural resources.
- Include post-project monitoring to ensure that the expected levels of adverse impacts are not exceeded.
- Be supported by most stakeholders.

CESAM-PD

27 June 2007

MEMORANDUM FOR RECORD**SUBJECT: Savannah Harbor Expansion Project; In-Progress Review Meeting**

1. Savannah District hosted an In-Progress Review (IPR) meeting on 24 – 25 April 2007 on the Savannah Harbor Expansion General Re-evaluation Report (GRR). The meeting was held in Savannah with participation from HQUSACE, ASA(CW), CESAD, CESAM, CESA W, CESAS, and the Georgia Ports Authority (GPA). The meeting agenda is enclosure 1 and a list of participants is enclosure 2. The purpose of the IPR was to discuss the status of the project and to gain concurrence and/or direction on issues of vital importance to the project. This memorandum documents the discussions and decisions of the IPR.

2. PROJECT OVERVIEW AND HISTORY.

a. The meeting was called to order and the Project Manager provided an overview of the Savannah Harbor. It was noted that the annual maintenance quantity averaged 7.5 million cubic yards of mostly silt and fine grained clay materials. The location of the confined disposal areas totaling approximately 6000 acres were also pointed out on a map of the harbor. The reported location of the proposed Jasper County terminal was also highlighted with emphasis given on the need to utilize and maintain all the disposal areas in the inventory due to the quantity and nature of the fine-grained materials pumped from the harbor. In addition, it was explained that since the upstream disposal areas 1N, 1S and 2A have reached their storage capacity limits it is now necessary to pump materials downstream to the lower harbor disposal areas requiring expensive booster pumps which increases the cost of harbor maintenance.

b. The stationing of the harbor was explained with Station 0+000 at the shoreward end of the stone jetties and positive stationing up the river (Inner Harbor) to Station 112+500 with negative stationing out to Station -60+000B (Bar Channel). It was explained that the inner harbor is maintained with a dwindling fleet of small business cutterhead dredges while the bar or entrance channel is maintained with sea-going hopper dredges owned by large business concerns. The locations of the Georgia Ports Authority's Ocean and Garden City terminals were also pointed out in the upstream reaches of the inner harbor. There are 18 – 19 terminals besides Garden City and Ocean Terminal but vessels drafting 36 feet or better transit to the Ports Authority berths.

c. The location of several features of interest were identified including Tybee Island (location of a Federal shore protection project at the mouth of the harbor), nearby Fort Pulaski owned by the US Department of the Interior, Old Fort Jackson and the CSS Georgia. It was explained that the channel is constricted from 500 to 400 feet wide in the vicinity of Old Fort Jackson and that the CSS Georgia will have to be removed prior to deepening the harbor. The concerns of the residents of Tybee Island were also explained as relates to the interruption by dredging of the littoral drift of sands that move in a North-South direction across the entrance channel.

3. PROJECT BACKGROUND.

a. The expansion project had originally been pursued by the Georgia Ports Authority under Section 203 of WRDA 1986 and was eventually authorized conditionally in the Water Resources Development Act of 1999 with a list of requirements to be completed before the project could be constructed. Most notable of the requirements is that four Federal Departments (Army, Interior, Commerce, and EPA) must approve the project documents before full authorization can be achieved.

b. It was stated that the purpose of this study is to examine the feasibility of deepening the currently authorized -42 foot mhw project to as deep as -48 feet mhw. It was also explained that this project is examining the incremental effects of deepening to -48 feet mhw and that it was not the purpose of this project to identify or address the incremental or cumulative impacts of prior harbor modifications except the identification of cumulative impacts required under the National Environmental Policy Act.

c. Timeframes for completion of the major milestones were presented with the scheduled goal of obtaining a Record of Decision (ROD) by Sept 2008 set as the ultimate PDT objective. It was mentioned that the Savannah Harbor Expansion Project had been included as one of the test projects in the Corps of Engineers' Lean Six Sigma (LSS) initiative and that after a thorough review of the lessons learned from South Florida projects, we will possibly be able to apply LSS such that the chance of accomplishing the scheduled ROD date will be improved.

d. A question was raised regarding the sponsorship of the harbor and it was pointed out that the Project Sponsor for operation of the Savannah Harbor Federal Project is the Georgia Department of Transportation (GaDOT). The GaDOT is also responsible for cost-sharing in the provision of suitable areas for disposal of dredged material for the existing project. The Georgia Ports Authority (GPA) is the non-federal interest for the Savannah Harbor Expansion Project but no Design Agreement has been executed and, hence, they are not officially a cost share sponsor. Under an MOA executed in April 2000, they have contributed in excess of \$28 Million for technical underpinning work while the federal government has contributed approximately \$6 million. On past and current projects, the GaDOT has served as the sponsor for construction and O&M this may also apply in the case of Savannah Harbor Expansion.

4. ENVIRONMENTAL IMPACT AND MITIGATION PLANNING REVIEW.

a. Mr. William Bailey provided a basin and project overview from an environmental perspective for the participants to gain an idea of the type and scale of the factors influencing the project. Viewed as a watershed, the Savannah River Basin contains three Federal reservoirs (Thurmond, Russell, and Hartwell), the New Savannah Bluff Lock and Dam at Augusta, the Savannah River Below Augusta (channel depth 9-feet all the way to Savannah), and most important to this project, the Savannah National Wildlife Refuge. Originally established as a freshwater refuge, the activities of man have converted portions of the freshwater marsh to a more saline habitat. The most obvious impact to the refuge is that with each deepening, saltwater has moved further inland reducing the amount of freshwater marsh. While over the years different projects have impacted Savannah Harbor and its environs, this project will only mitigate for the incremental effects of this recommended harbor improvement.

b. The Savannah Harbor Expansion GRR focuses the mitigation planning on potential mitigation features that modify flows in the estuary. The objective of modifying the flows is to reduce salinity impacts in terms of its affect on wetlands, dissolved oxygen and fisheries in a cost-effective manner. The goal of mitigation planning is to develop an optimum mitigation plan for each depth that addresses the impacts anticipated at that depth. In building each plan we will discuss the rationale for that plan.

c. The mitigation features that modify flows consist of a series of cuts in the Middle and Back Rivers that can be opened and closed to increase freshwater flows through those rivers. Currently, impact and mitigation analyses have been completed for depth increments at 44, 45, 46 and 48 feet. Discussions at this IPR meeting expressed a desire to look at the 43- and 47-foot depths. For this requirement the District suggested that we can interpolate between the bracketing depths, i.e., for 47 feet we would interpolate between 46 and 48 feet. There will be a significant cost to the project in terms of time and money if we are required to do the modeling and environmental analyses for those incremental depths.

d. Mitigation features that modify flows can affect each other. Therefore, the order in which they are evaluated and combined is important. The District and agencies selected an order based on a preliminary evaluation of their cost-effectiveness. We will evaluate all combinations of flow-modification features recommended by Corps modelers and resource agency team members. The Corps hosted an interagency meeting on June 20-21 to discuss the impact and mitigation reports. The agencies continue to work with the Corps to evaluate impacts from the project. We reached technical agreement on ways to identify and calculate project impacts. The USFWS reiterated its position that the project result in no net impacts to tidal freshwater wetlands. Additional work will be conducted to develop comprehensive mitigation plans to mitigate project impacts.

e. While both the Corps and the agencies involved desire no net impacts, the Corps will evaluate each plan by: 1) the goal of no net impacts, and 2) cost effectiveness. The Corps will base its selection on cost-effectiveness. To do this we will need to know the cost of each unit of mitigation provided. In preparation for this requirement, costs are being developed for each likely mitigation feature. As features are added to a plan so are their costs. At the completion of each plan, we will have the cost of that plan. As part of this process, average annual costs will be developed for each plan (life cycle costs). It is understood that the cost of mitigation may limit the depth of deepening that is economically justified.

f. The Savannah River estuary is a complex system. In order to focus and more efficiently develop mitigation plans, we will coordinate with the resource agencies and establish a priority with regards to the value of the resources to be protected. The Corps is working with the agencies to determine the components of each plan. In the end, all four Federal Departments with approval authority on the project need to approve the recommended mitigation plan for the project to move forward.

DECISION: Headquarters recognizes that the number of potential combinations of mitigation features is immense. They concur with present Pyramid Approach of evaluating mitigation features sequentially to identify their individual effectiveness. The District will explain the rationale it used for building each

mitigation plan. Headquarters recommended that the District look at the mitigation impacts at 43 and 47 feet (we are already looking at the impacts at 44, 45, 46, and 48 feet).

ACTION: The District will look at mitigation costs for a 47-foot project.

5. PLAN FORMULATION PROCESS AND REQUIRED MODIFICATIONS OR ACTIONS

a. **Formulation of Alternatives.** The scope of the GRR was developed considering the conditional authorization issues raised in the Chief's Report on the feasibility study, and issues raised in the lawsuit filed by the Southern Environmental Law Center. The GRR conducted a significant re-formulation evaluation in which navigation problems and opportunities were identified and a wide array of alternatives addressing those problems and opportunities were identified and evaluated. That effort was documented in an interim document referred to as the "Formulation of Alternatives" report (dated April 2005) which recommended the detailed evaluation of channel deepening alternatives.

b. **Without Project Conditions.** The "Formulation of Alternatives" report documented the major assumptions pertaining to the "without project future condition". The development of additional information has caused some of those assumptions to be revised. The following is a list of the major assumptions in the "without project condition":

- Continue existing maintenance as defined in Dredged Material Management Plan (DMMP)
- Continue using all of the Confined Disposal Facilities (CDFs) in Jasper County
- Continue operating the Savannah National Wildlife Refuge as a freshwater refuge
- Maintain current Dissolved Oxygen levels
- Panama Canal will be expanded
- There will be continued growth in the size of container ships
- Continued growth of container traffic
- Hinterland transport will not limit commodity flows
- GPA will continue to provide landside improvement in accordance with their Capital Improvement Program
- Throughput capacity will continue to increase as GPA makes capacity and efficiency improvements

Although the "Formulation of Alternatives" report was reviewed and approved by HQUSACE in conjunction with the IPR held in December 2004, there are additional aspects of the "without project condition" that have not been discussed or approved and some assumptions required further discussion in light of new information. The District has tentatively scheduled an Issue Resolution Conference (IRC) (perhaps a televideo conference) for 15 August 2007 specifically to review and approve the "without project condition".

The project features being considered for further study are as follows:

- Deepen and extend entrance channel
- Maintain existing side slopes (450 ft rather than 500 ft impact to channel widths)
- Deepen GPA berths
- Deepen and expand the turning radius of the Kings Island Turning Basin (KITB) – verify the design vessel used to establish turning basin dimensions.
- Use bend wideners in areas indicated by the Ship simulation study.
- Location and need for advance maintenance
- Passing lanes
- Raise dikes on disposal areas
- Effects on O&M of the existing navigation project

- NED plan will be identified and MCACES baseline cost estimate will be developed.

Although the general formulation process for completing the GRR was acceptable, HQUSACE made some specific suggestions/recommendations. HQUSACE recommended that the GRR present the project and its development in terms of the entire Savannah River system (from Tybee Island up through the Corps reservoirs). Currently, the study appears to be too focused on National Economic Development (NED) and a more thorough discussion of other accounts (Regional Economic Development, Environmental Quality, and Other Social Effects) is needed. The GRR also needs to use a systems approach that takes risk and uncertainty into account in definitive ways, for example, asking the questions "What is the risk if we do not deepen?" and "What are the environmental risks if we do deepen?" The report should review the global eastern coast containership situation – without project conditions, deepening of the Panama Canal, drafts of containerships, and implications to answering these questions.

During earlier discussions on environmental impact and mitigation planning HQUSACE recommended that the District look at the mitigation impacts at 43 and 47 feet. While the benefits and costs for these channel depths can be determined relatively easily, a full analysis of the mitigation impacts and costs for these depths will be costly and time-consuming to determine. In order minimize impacts to the schedule and costs to the project the District will evaluate mitigation costs for a 47-foot project by interpolating between the bracketing depths of 46 and 48 feet. Only if it appears that the 47-foot Project will be the NED Plan will a full analysis be scheduled. The 43-foot depth is eliminated since GPA would not partner a one-foot deepening increment.

d. **Dredged Material Management Plan.** HQUSACE stated that the GRR will need to demonstrate that there is a viable dredged material disposal plan for the 50-year project life. This plan for the Savannah River CDFs should be detailed for the first 20 years and conceptually thereafter. Analyses to date indicate that there will not be a substantial increase in maintenance sediments from a further harbor deepening. The GRR must evaluate the effects of deepening on the DMMP and O&M costs, and demonstrate that there is a viable dredged material placement plan for operation of the harbor. The deepening project will bear the costs of dike raisings associated with disposal of new work sediments. The time when these costs will be incurred will depend on the conditions of the CDFs when the construction of the deeper channel in the river is initiated. HQUSACE suggested that major capacity increases (dike raising is a cost-shared activity funded by the Construction General program) be budgeted as part of Savannah Harbor Expansion Project and that the PCA be written to include several dike raising events. This would be a more efficient process by eliminating the need for separate DMPs/PCAs later. HQ stated that the costs of that additional dike construction (beyond replacing the capacity used during the initial construction) should not be included in the project BCR unless there are incremental increases in maintenance costs due to deepening. Similarly, it would not be credited against the project's Section 902 cost limit. The District will evaluate this opportunity in light of geotechnical considerations and limitations in the Dredged Material Containment Area (DMCA) system.

e. **Nearshore Disposal.** The plan for depositing sediments from the entrance/bar channel in the nearshore zone in compliance with the Georgia Coastal Zone Management Plan (CZMP) was discussed. HQUSACE stated that the GRR needs to demonstrate that the recommended placement plan is the least cost plan consistent with Federal environmental laws. The GRR will address any incremental costs beyond the Federal Standard. At present, we believe the nearshore placement is the lowest cost environmentally acceptable method of disposing of the new work sediments. We will document our findings on this issue in

the Draft GRR. A small increase in maintenance volumes is expected when the entrance channel is extended to deeper water. Those sediments are not proposed for nearshore placement because of the large distance (and cost) required to transport them back to the nearshore area. CESAD suggested that the nearshore placement plan be documented and be coordinated with the Vertical Team for review.

f. Advance Maintenance. Advance maintenance will be needed as a management tool for the deepened channel. The shoaling pattern of the deepened project may differ from the existing project. CE SAD suggested that the GRR should identify and justify the advance maintenance that is expected to be needed for the deepened channel, understanding that the existing advance maintenance program is attributed to the without project condition. The engineering work to date indicates little change would be needed to the existing advance maintenance in the inner harbor.

The District has an advance maintenance feature approved in the entrance channel but has not received funding to implement that feature. HQUSACE stated that the District could include construction of that feature as part of the Expansion Project if it is still warranted with the deepened project. Since that feature would reduce O&M costs and not be required to deepen the harbor, it could be excluded from the project BCR and Section 902 cost limit.

g. Passing Lanes. Ship Simulator studies indicated that passing lanes were beneficial at two locations; however, an economic analysis is needed to determine if they are incrementally justified. If the passing lanes are part of the locally preferred plan, that plan must be economically justified, although the passing lanes do not necessarily have to be incrementally justified. Costs are counted towards the total project cost. Currently, the Corps has available a Harbor Simulation (economic) model that can be used for this purpose. This analysis has not been done. The District will re-look at the cost of what it takes to do this analysis (study requirements and time). Todd Nettles (Mobile District) has used this model. This analysis will include an assessment of whether or not the harbor pilots believe they need passing lanes and in-cum will use them. GPA is willing to fund passing lane construction 100-percent. During previous coordination, the pilots had expressed a desire for passing lanes.

DECISIONS:

- The District will schedule an Issue Resolution Conference (IRC) (perhaps a televideo conference) specifically to review and approve the "without project condition".
- The GRR will present the project in terms of the larger system/watershed (from Tybee Island up to the Federal reservoirs).
- The GRR will include a thorough discussion of other accounts (Regional Economic Development, Environmental Quality, and Other Social Effects).
- The GRR will use a systems approach that takes risk and uncertainty into account in definitive ways, for example, asking the questions "What is the risk if we do not deepen?" and "What are the environmental risks if we deepen?"
- The report will review the global and US east coast containership situation – without project conditions, deepening of the Panama Canal, drafts of containerships, implications to answering these questions.
- The District will evaluate the 47-foot depth. The District will interpolate between the 46- and 48-foot depths to get the mitigation costs for the 47-foot depth alternative. If this depth is tentatively identified as the NED Plan, the District will run the environmental models and develop detailed information from that specific depth alternative before submitting the final report.
- The GRR will demonstrate that there is viable dredged material disposal plan for a 20-year period and a conceptual plan to complete the 50-year project life.
- The nearshore placement plan will be documented and coordinated with the Vertical Team for review.
- The GRR will identify and justify the advance maintenance that is expected to be needed for the deepened channel.
- The District will re-coordinate with the harbor pilots to learn their present views on passing/meeting areas.
- The District will consider including other features in the project (such as dike raisings or advance maintenance) that are not required for the deeper channel but would improve the efficiency or effectiveness of the harbor maintenance practices. These additional features will be excluded from the project BCR and Section 902 cost limit.

6. ENGINEERING REVIEW

a. **Channel Design.** Two design vessels were used for the Ship Simulation studies, one existing and one future. The recommended channel was designed based on plots of pilot runs from the ship simulation study. The design also included maintaining the existing side slopes. This reduces needs for adjacent land and impacts to channel velocity and existing sedimentation patterns. The dimensions of the Kings Island Turning Basin (KITB) were also developed from the study (dimensions needed to turn the design vessel). Using the needed dimensions the footprint of the turning basin increased by 5.5 acres. The location of the bend widenings was determined by ship simulation studies.

b. **Sedimentation.** Our investigations indicate that upstream of Station 28+000 all of the sediment entering the project area is from upriver and the amount of sedimentation depends on river discharge. Mixing zones determine where the shoaling areas will be. Downstream of Station 28+000 to the entrance channel acts as a sediment sink for littoral sand transport. A small increase in total shoaling volume is expected in the entrance channel because of the increase in the length of bar channel. Increasing in depth does not increase the total shoaling volume in the inner harbor. It does, however, increase the cost for O&M due to location of shoaling areas. Removal of which depends on the availability of disposal areas (pumping distance). At this time the District will not shift the present advance maintenance areas until it has a better understanding of the shoaling areas created by deepening.

c. **Dredged Material Disposal.** The Dredged Material Management Plan (DMMP) divides the harbor into two sections, the inner harbor and the outer harbor or bar channel. The existing upland CDF's are adequate to contain the new work material provided the plans for raising the dikes as described in the

existing DMMP and 2007 Work Plan are followed. The costs for the replacement of lost capacity for the new work material have already been calculated and given to the cost estimators. HQUSACE suggested that there are possible efficiencies to be gained for the O&M Program by increasing disposal area capacity for O&M material during construction of the Expansion Project. Another possibility is the use of CG funds to construct the approved advance maintenance widener in the bar channel. These efficiencies will not impact the Projects Section 902 limit and will not be included in the cost of the project unless they represent incremental increases in maintenance costs over the maintenance costs at current depths. Identify possible saving in overall costs by doing this.

(1) **Bar Channel.** Minimize pumping distance and take advantage of good quality sediments to be placed in the intertidal and nearshore zones. The District must either show this the least costly most environmentally acceptable plan or include cost-sharing for the incremental costs if not already included as a requirement under the CZMP.

(2) **Offshore Disposal.** The Corps has the environmental clearances to use the EPA approved ocean disposal site (ODMDS). For the extension of the bar channel, (Station -65+000 to Station -85+000) for new work placement, the Corps is considering constructing a mound on the side of the channel with the new work sediment. Placement of this dredged material adjacent to the channel would be accomplished under Section 404 of the Clean Water Act. Use of this dredged material to construct a mound would be beneficial, therefore outside the Section 103 requirements. There is no Section 103 approval required for this since our placement would create a feature. The present design is currently being reviewed in terms of O&M requirements. Presently, all O&M material goes to ODMDS.

(3) **Clarify CZM rules for Georgia.** Georgia's CZMP considers each project separately. Part of the rules state that if we remove beach quality sand from the littoral zone we are required to replace it. Currently, the nearshore sites have been evaluated for new work only. Tybee expects O&M material to be placed here if it is beach quality sand. The nearshore sites would be available for use by the existing project as well as the Deepening Project, as long as the sediments are suitable for such placement. We concur that the O&M program also has to comply with the GA Coastal Management program. Tybee wants to bank sand taken from inshore zone until it reaches a pre-established threshold. The DMMP (or update) will look into the possibility of placing beach quality O&M material into the nearshore sites currently approved for new work material. The DMMP will also demonstrate that there is viable dredged material disposal plan for the 50-year project life. The completed DMMP (or update) and the disposal plan concept will be coordinated with the vertical team.

d. **Cadmium Containment.** There is naturally enriched cadmium consolidated in the Miocene clay layer in portions of the harbor scheduled to be deepened. At this point we are looking into disposal scenarios to identify whether special measures for containment of the contaminated material are required.

e. **Cost Engineering.** The district has developed cost estimates for 2-foot incremental depths including ROM estimates for the mitigation options. These cost estimates will be used for screening purposes (NED Plan selection), a process we have not begun as of yet. Contingencies for dredge work were set at 25% as prescribed in the ER 1110-2-1302. The Walla Walla District will be doing the ITR on this cost estimate.

f. **Wake Analysis/Bank Erosion Study.** Four areas were looked at including City Front, North Tybee Island, the Bight Channel, and Ft. Pulaski. There was no increase in bank erosion due to ship wakes associated with this project to City Front, North Tybee Island or the Bight Channel. At Ft. Pulaski overall erosion in the area is 3.1 feet per year. Of this erosion less than 0.1% is due to ship wakes associated with project.

g. **Beach Erosion Study.** The present environment at Tybee Island will not change if the project is deepened.

h. **Aquifer Study.** Downward movement of salt water through the cap material due to dredging is very small. This study has undergone external peer review. Three non-Corps affiliated reviewers were selected (2 USGS employees and one university professor). While they had questions about our methodology they did agree that our conclusions were justified.

i. **Hydrodynamic and water quality modeling.** Both the EFDC Model (hydrodynamics) and the WASP Model (water quality) were ITR'd and approved by natural resource agencies for use by this project.

j. **Storm surge.** Engineering modeling was performed to determine if deepening would have an impact on hurricane surge in the area. The results of the modeling indicated that deepening does not have an impact on hurricane surge.

DECISIONS:

- The District will schedule an ITR of the Project Cost Estimates by the Walla Walla District.
- The District will evaluate the proposed nearshore dredged material placement sites for both new work and O&M material.
- The District will review and obtain clarification on the coastal zone management rules for the State of Georgia with regard for our DMMP.
- The DMMP will confirm that there is a 50-year project life for our O&M dredged material placement sites after accommodating the new work material.

7. ECONOMICS ANALYSIS REVIEW

- a. The Savannah District contracted with GEC to produce the following analyses:
- commodity forecast - completed March 2005;
 - fleet forecast - completed August 2005;
 - benefits calculation methodology and model - completed May 2006;
 - multiport analysis - completed August 2006
 - regional port analysis was completed on 9 July 2007.

Each analysis has gone through the ITR process and final reports have been submitted on all except the summary report for the Regional Port Analysis.

b. Input provided by the GEC, Inc. economic analysis contract serves as an excellent foundation for the report; however this work did not address project related uncertainties as required by Corps guidance. Additionally, changes in containership and container port operations are occurring at a rapid pace superseding previous estimates and making even recently completed work outdated. Therefore, carrier interviews were conducted in the summer of 2006 in effort to confirm and update information previously gathered. Additionally, representatives of the Panama Canal Authority were interviewed regarding proposed expansion plans. As a result of the interviews, as well as other events transpiring since GEC's original work, the following are being included in economic updates.

(1) **Changes in Port Rotations.** Possible changes in port rotations are being investigated. There were several carriers that indicated that channel modification could result in reordering of ports of call along the east coast in effort to operate more fully loaded at Savannah. These operational possibilities are not factored into the existing GEC report.

(2) **Panama Canal.** GEC efforts assumed no expansion of the Panama Canal. Accordingly, the vessel fleet forecast and resulting NED benefits are constrained by this assumption. In November of last year, the Panamanians passed a national referendum to expand the canal. Expansion plans include a third lane that would be able to accommodate vessels that are 1,200 ft long, 160 ft wide and drafting 50 feet. Proposed plans have construction being completed in 2014. The economic analysis is being revised to include several scenarios which address the effects of Panama Canal modification. Under without and with project conditions, it is now being assumed that the Panama Canal will be modified as planned. However, to address risk and uncertainty related to the proposed expansion plans, sensitivity runs will include once scenario where the expansion does not occur, another where project improvements come on line after 2014 and several scenarios regarding the timing of fleet shifts resulting from the expansion (i.e., shifting from panamax to post panamax vessels).

(3) **New York Harbor's Bayonne Bridge.** The GEC analysis assumed that the Bayonne Bridge in New York would be a constraint to services which called on New York and Savannah in their port rotations (i.e., limiting vessel size due to air draft restrictions imposed by the bridge). The New York Harbor study recommended and was approved for deepening the channel to 50 feet. Benefits were claimed for container vessels being able to load to the maximum operating drafts for the 50-foot controlling depth without any air draft restriction being imposed on vessel traffic. Carrier interviews conducted in 2006 confirmed this assumption as vessels are either being equipped with hinged masts in effort to avoid air draft restrictions or other design changes are being implemented on new vessel orders. Accordingly, it is being

assumed under both without and with project conditions that the Savannah Harbor container traffic which includes New York Harbor in the port-rotation will not incur those restrictions either.

(4) **Vessel Operating Costs.** The existing benefits model utilizes 2004 vessel operating costs. It is anticipated that new vessel operating costs will be released during the spring of this year. We plan to use the newly released costs. However, in the event that 2007 vessel operating costs are not provided, the 2004 costs will be utilized. Note, of concern is the negligible difference in IWR published hourly operating costs between a panamax and post panamax vessel (\$0.0003/TEU) and the resultant impacts to the NED analysis.

(5) **Data Inputs to Benefits Model.** The Data inputs and model assumptions for the benefits model are being updated as appropriate (e.g., estimated cargo density, the number of crane moves per hour, etc.).

(6) **Commodity and Fleet Forecasts.** GEC commodity and fleet forecasts began in 2004 and extended through the life of the project. Three additional years of data are now available. Recorded information shows that actual commerce and vessel calls far exceeded that estimated for those early pre-project years upon which the forecasts were based. Accordingly, this information is being updated and forecasts are being revised. Risk and uncertainty of the commodity and fleet forecasts will be assessed using a scenario based approach (e.g., with and without Panama Canal expansion; with and without Jasper County facility development; assuming no commodity growth beyond a certain point; etc.).

(7) **Benefiting Service Updates.** The GEC analyses determined that there would be 3 container services that would benefit from channel modification. Analysis was limited to these three services due to the restrictions imposed by the Panama Canal as well as the Bayonne Bridge. Benefiting services will be expanded to include, as appropriate, those previously omitted. Although the analysis is not complete, it is currently estimated that 7 services will benefit from the proposed channel expansion project. Additionally, the possibility of changes in service calls between without and with project conditions will be investigated. During the 2006 carrier interviews, a few carriers indicated that without channel deepening, Savannah Harbor could lose some services. This scenario will be investigated further as part of the without project condition (i.e., landside benefits evaluation).

(8) **LNG Evaluation.** Under with project conditions, containerships will be less tide restricted. With these vessels being able to operate more freely through the tidal cycle, there will be less competition for transit at high tide between the LNG tankers and the large containerships. The LNG vessels need to transit up-river on the high tide for maneuverability reasons, and will retain this requirement regardless of channel depth. LNG vessels typically have a design draft of 38 feet and are loaded between 35 and 37 feet. Vessel loading and the number of LNG vessel calls will be the same for both without and with project conditions. However, the deeper channel will reduce the need for containerships to wait for high tide, which will thereby reduce competition for high tide transit. The deeper the channel depth, the more significant the degree to which that competition is reduced. The reduced competition for high tide for incoming vessels will result in a reduction in traffic-related delays experienced by LNG tankers. The channel depth that provides the largest reduction in wait time for the LNG carriers is the 48-foot channel, which has a reduction in delay cost of approximately \$556,000 annually.

(9) **Passing Lanes.** Detailed evaluation of passing lanes has not been performed to date. Based upon information provided by the harbor pilots and carriers, passing lanes are needed to improve vessel operations in the channel. Passing lanes will be evaluated as a component of future with project conditions.

(10) **Regional Economic Development.** An assessment of Savannah Harbor's impacts on the regional economy has not been performed. Accordingly, the description of the project's impact is limited by only looking at NED impacts. Therefore, the final report document will include a description of the harbor's regional impacts.

DECISION: HQUSACE concurred with approach for updating the economic analysis. Additionally, an evaluation of passing lanes as well as an RED evaluation should be included in the final report document. Upon its completion, the final Regional Port Analysis Report should be coordinated with the vertical team.

ACTIONS:

1. **Passing Lane Analysis** – The costs of an incremental evaluation of passing lanes will be determined and the PDT will decide whether to conduct that analysis.

2. Regional Economic Development (RED). A regional impact evaluation will be included in the study document.

3. Analyze Landside Benefits. David Miller and Associates will develop a Draft Scope of Work for this effort.

4. Headquarters will pursue the June 2007 completion date for updating the vessel operating costs and forward concerns about adequate recognition of large vessel efficiencies in operating cost data. (action item for Tom Waters). Concerns were forwarded to IWR 26 April.

8. INTERNAL and EXTERNAL REVIEW PLANS

a. A draft Review Plan was presented at the IPR that complied with the direction provided during the 2004 in progress review.

b. External Peer Review. To date External Peer Review has been completed on the following 3 critical portions of the study:

- The EFDC & WASP Models
- The Marsh Succession (M2M) Models
- The Aquifer Model

External Peer Review of the Economics Analysis is planned but not yet completed. No External Peer Review of the entire document was planned. Our external peer review process employed sole source contracting procedures and simple purchase orders.

c. Independent Technical Review. A very thorough independent technical review is ongoing as products are developed for the study. For example, each piece of the economic analysis has been reviewed by Kevin Knight, the regional technical special for deep draft economics in SPD. The Chief of Engineering (SAW/SAC/SAS) will make a recommendation of who should accomplish the ITR of the Engineering Appendix to the Deep Draft Navigation PCX. The PCX will approve the recommendation and manage the review. The Cost Estimating Center of Expertise in Walla Walla District will be used for ITR of the cost estimate. The PCX requests that an external peer review of the Deep Draft Vessel Operating Costs be performed to insure their accuracy.

d. The need to conduct an External Peer Review on the entire draft GRR was discussed. HQUSACE indicated that the EPR will be needed for the entire report, not just major components. Accordingly, External Peer Review will be completed on the entire document (the District will probably use Battelle for this effort). The review will cover the draft report as a whole. The reviewers will not go back to individual pieces that have already been externally reviewed. They will however look at how the information from those previously reviewed sections is being used in the report. The external peer reviews will be asked to focus on the mitigation plan. In addition, the external peer review of the economic analysis will be rolled into the overall review.

DECISIONS:

- Conduct an agency review of the mitigation plan and then overall external peer review on the entire report with emphasis on the mitigation plan and the economic analysis.
- Previously completed external peer reviews will not be duplicated.
- A revised review plan will be provided to South Atlantic Division for approval.
- HQUSACE agreed to explore the need for an external peer review of the Deep Draft Vessel Operating Costs.

9. MODELS

- a. A handout was provided listing the models being used in the study.
- b. This handout identifies what the PDT believe is a Planning model and what is an Engineering model. Engineering models are certified through their establish process, Planning are certified through the appropriate PCX.
- c. No Planning models have been certified at this time. The Planning models have been ITR'd through the PCX.
- d. No external peer review of models is required. Independent technical review of models is considered to have met the intention of EC 1105-2-407.

DECISIONS:

- The Deep Draft Navigation Planning Center of Expertise will insure that Independent Technical Review are conducted on all "planning" models. HQUSACE recognizes that no "certified" planning models are available at this time. Planning models include those developed for economic analysis and marsh succession analysis.
- The Chief, Engineering Division, Wilmington District, will insure that review of "engineering" models follows Engineering and Construction Bulletin 2007-6.

10. OTHER ISSUES

a. Cumulative Regional Port Development Impacts

(1) **Issue** – The District has been question about cumulative Regional Port Development impacts (SELC complaint). How should we respond in the GRR?

(2) **Discussion** – To address the cumulative impacts of deepening other east coast ports appears to be beyond the scope of this study and is beyond what the National Environmental Policy Act (NEPA) requires. Without authorization and funding from Congress the Corps has no authority to evaluate this. The district cannot be charged with carrying out what this litigant wants if there is no authority. This is a legal question and Counsel at HQUSACE has been requested to become involved. District Counsel together with HQUSACE Counsel should develop a legal opinion regarding the expectation of NEPA. An Agency position needs to be developed.

DECISION: The District should formally transmit up through the chain a request for legal and policy review of this. Mr. Richard Worthington will coordinate this issue with HQUSACE Counsel.

b. Jasper County Terminal

(1) **Issue** – How should the proposed Jasper County port be evaluated in the Savannah Harbor GRR?

(2) **Discussion** – The "Formulation of Alternatives" report considered alternative port sites and associated channel deepening as alternatives to deepening the channel to the Garden City terminal. The evaluation contained in the report considered port development costs, dredging costs, and an estimate for mitigation. It did not include an evaluation of the impact on the ability to maintain the channel. The Jasper County site was one of those considered and would utilize two disposal areas utilized in maintaining Savannah Harbor. The conclusion of the "Formulation of Alternatives" report was that all of the alternative port sites, including the Jasper County site, were more expensive than deepening the channel to the Garden City terminal.

More recently, the Governors of Georgia and South Carolina, recognizing that the capacities of the terminals at Savannah and Charleston are finite, have agreed to jointly develop a terminal at the Jasper County site. There was significant discussion on the impact of the Jasper County port on the economic evaluation of the Savannah Harbor deepening. A number of problems were identified. The likelihood that a port will be constructed is speculative. There is no certainty that this will ever happen. It is proposed in the economic analysis to develop a scenario analysis. The analysis will be based on professional judgment

and assumptions. The possibility of developing an alternative without project condition was also discussed. With any decision we will have to disclose the thought processes we used in making the decisions.

The report will also need to determine the impacts to the management of the disposal areas. The Corps holds the easements on the disposal areas and the non-Federal sponsor must compensate the Government for the loss of these areas. Compensation may take the form of new disposal areas and/or payment in perpetuity of the additional incremental costs of maintaining the channel without the areas to be occupied by the Jasper County port. HQUSACE recommended that a risk and uncertainty analysis with respect to a Jasper County terminal be conducted as part of the GRR. There was no consensus on how to conduct the risk and uncertainty analysis.

ACTION: The District will convene a select group to develop a strategy for dealing with the Jasper County port alternative and coordinate it with the Vertical Team.

11. WASHINGTON LEVEL REVIEW PROCESS

a. Issue – Determine how the Lean Six Sigma principles will be applied to the Savannah Harbor GRR Washington Level Review Process to result in approval of the report in a timely manner.

b. Discussion – The Table included in the read-ahead material for the IPR was discussed. The SAD and HQUSACE representatives were asked to review the list of Washington Level Review steps from the AFB through the signing of the Record of Decision and provide any comments on overlooked steps, timeframes that were unrealistically short, etc. The District and HQ had previously agreed that Savannah Harbor will be a test of the Lean Six Sigma principles. The level of detail in the AFB read ahead information was discussed and it was determined that a preliminary draft report will be prepared as the read-ahead. The AFB is currently scheduled to be held in the October 2007 timeframe with 30 days for producing the PGM. The goal at the AFB is to have the PGM 90% completed at the end of the meeting. This will allow greater flexibility in the schedule after completion of the AFB.

Whether this report needs to be presented to the Civil Works Review Board was also discussed. It was strongly recommended that this project be subject to the CWRB. If determined necessary the CWRB can be held in the June 2008 time frame. This board determines whether the document should be released for State and agency review. Normally this process is only for feasibility reports. This is an authorized project so presentation to the CWRB is not mandatory. HQUSACE recommended that the report be presented to the CWRB as a means of developing a corporate commitment to project and include the Washington level resource agencies in the CWRB as well.

ACTION: The District will convene a VTC with the vertical team (Tom Waters and Margaret Johanning at HQ) on VTC to further discuss this schedule. An After Action Review of the IPR was held on 11 May to assess the application of Lean Six Sigma recommendations to the IRC.

12. DECISION MATRIX

ID #	OUTSTANDING DECISIONS /ACTIONS	RESPONSIBLE ORGANIZATION	COMPLETION DATE
1.	Is Interpolation for mitigation costs between 46 and 48 foot depths for the 47-foot depth acceptable	SAM-PD	Completed Answer (Yes)
2.	Determine the number and location of passing lanes	SAM-PD	
3.	Cost Engineering Risks and Contingencies	SAW-EN	
4.	Vessel Operating Costs- IWR Update	HQUSACE	
5.	Regional Port Development and Cumulative Impacts	HQUSACE	
6.	Civil Works Review Board	HQ(A)&HQUSACE	
7.	Jasper County & Without Project Condition determination	SAM-PD	
8.	Will the CSS Georgia be removed with O&M or CG funding?	HQ(A)	
9.	Schedule IRC for Without Project Conditions	SAM-PD	
10.	GRR to include discussion of other accounts: Regional Economic Development, Environmental Quality, Other Social Effects.	SAM-PD	
11.	Risks and uncertainties of deepening, not deepening.	SAM-PD	
12.	Review Global and U.S. east coast containership situation.	SAM-PD	
13.	Nearshore placement of new work and O&M material.	SAM-PD/SAW-EN	
14.	Analyze landside benefits.	SAM-PD	
15.	External Peer Review of Draft GRR		
16.	Independent Technical Review of all Planning Models.	SAM-PD/PCX	
17.	Review of Engineering Models.	SAW-EN	

JUN-11-2008 18:02 FROM REAL ESTATE DIV

TO 89182514744

P.02

04/04/2005 08:20 FAX 404 562 5218

CESAD Civil Works Divisi

@001



DEPARTMENT OF THE ARMY
SOUTH ATLANTIC DIVISION, CORPS OF ENGINEERS
ROOM 8818, 99 FORSYTH ST., S.W.
ATLANTA, GEORGIA 30303-8801

REF TO
ATTENTION OF
CESAD-PD-PP

25 March 2005

MEMORANDUM FOR Commander, SAVANNAH DISTRICT (CESAS-PM)

SUBJECT: Memorandum for Record, Savannah Harbor Expansion Project, In-Progress Review Meeting

1. Reference CESAS-PD Memorandum for Record (MFR) dated 4 January 2005, revised 24 February 2005, subject Savannah Harbor Expansion Project, 2nd In-Progress Review Conference (enclosed).
2. The reference MFR adequately documents the issues discussed by Savannah District and the Georgia Ports of Authority, and the policy guidance provided by the Office of the Assistant Secretary of the Army for Civil Works, Headquarters-USACE, and the South Atlantic Division, during the 2nd in progress review (IPR) conference held by video tele-conferencing (VTC) on 9 December 2004. Based on the policy guidance provided in the MFR, you may proceed with preparation of the draft General Reevaluation Report and Environmental Impact Statement (GRR/EIS). The district is reminded to begin coordinating with the National Planning Center of Expertise for Deep Draft Navigation to initiate the process for independent technical review of the GRR/EIS. It is important that you discuss with the Center any external reviews activities planned and/or ongoing.
3. We are coordinating with the HQUSACE SAD-RIT to begin planning for hosting a meeting among the three agencies that must approve the Savannah Harbor Expansion project, along with Corps of Engineers. These three agencies are the Environmental Protection Agency, Department of Interior and Department of Commerce. We will work arrangements for this meeting concurrently with your staff.
4. Finally, during the last conference we agreed that an IPR would be conducted prior to the end of FY 05. Please let us know when you feel this IPR should be scheduled.
5. The point of contact for this action is Mr. Daniel Small at 404-562-5224.

Encl

WILBERT V. PAYNES
Chief, Planning and Policy Community
of Practice

Savannah Harbor Expansion
In-Progress Review Action Items
20 September 2007

1. Advanced Maintenance. Advanced maintenance in conjunction with the deepening will require documentation and economic justification in the GRR. Carrying over the existing O&M advanced maintenance features is not acceptable. The GRR must demonstrate the need for advance maintenance after the project is deepened. Provide better identification of existing advance maintenance locations including where it has already been authorized and accomplished. As a point of clarification, for the With Project condition, it was stated that the Expansion Project had to demonstrate the continued need for advance maintenance from an economic standpoint. **Lead: SAS (Bailey, Garrett, Wiederhold)**
2. Lateral Advance Maintenance. In Table 2 the lateral advance maintenance widener on the outer part of the channel was shown as having been dredged. It will be removed from the table and the write-up. As recommended in the In-Progress Review of April 2007, this feature will be discussed in the General Reevaluation Report (GRR) since it may represent a cost efficiency for the O&M of the deepened project. **Lead: (Wiggins)**
3. O&M DMMP and DMMP for Deepening Work. The Future Without Project Conditions should address existing DMMP requirements and the fact that the existing project has sufficient disposal capacity in existing sites for the 20 year planning horizon. **Lead: SAS (Bailey, Garrett)**
4. Related Dredging Activities in Savannah Harbor. The Future Without Project Conditions should document how on-going agitation dredging at private berths impacts the Federal navigation channel. How the dredging is done along with the associated costs, and operational techniques, should be addressed in the GRR Without Project Condition. **Lead: SAS (Wiederhold/Bailey)**
5. City of Savannah Water Intake Structure. The Existing condition with the City of Savannah water intake structure on the Savannah River relative to the proposed deepening project should be address in the GRR. **Lead: SAS (Bailey)**
6. Dissolved Oxygen (DO) Standards and EPA TMDL. The Existing Conditions section should address the existing DO conditions and existing DO standard. Future Without Project Conditions should address improvements expected from implementation of the DO TMDL. Our base conditions should include some idea of what future conditions may be as industries attempt to address the TMDL issue. The mitigation should address the incremental impacts of channel deepening. We need to include the effectiveness of the mitigation plan under various assumptions about what the DO will be in the future. The base conditions could change and make it more costly. **Lead: SAS (Bailey)**
7. Channel Deepening and Impacts on Tybee Island. The PDT should incorporate into the GRR, the outcome of discussions relative to the 2005 GA CZM changes as they relate to Tybee Island as well as any finalized and peer reviewed documents related to the channel impacts study. The recently released executive summary by ERDC, stating that bar channel dredging is adversely impacting Tybee Island will have to be addressed as part of the Future without Project Conditions. Since the GRR for the Expansion Project will be written well prior to completion of the Tybee Island (Channel Impacts) Feasibility Study, the GRR will only be able to address the issue in a general way or by using an approach to mitigate the impact that is feasible but may later be found to not be the most economically efficient or environmentally sustainable. **Lead SAS: (Parrott, Garrett)**
8. CSS GEORGIA. The Future Without Project Conditions should be rewritten to state that the CSS Georgia is a separable element that is a Federal responsibility. The mitigation activities could be conducted at the same time as the Expansion Project is implemented and funded by Construction General. Since it is an ongoing Federal responsibility, those mitigation costs could be included for Construction

General funding but would not be subject to the Section 902 limit or part of the B/C ratio. **Lead: SAS (Garrett, Wood, Premo)**

9. Economic Projections. The Economic section summary should be supplemented with additional, but existing information to help present its case. No new information is needed, just what is available. HQ said the risk and uncertainty analysis should be accompanied by some observations about what is actually happening. **Lead SAM (Claseman)**

10. Economic Growth Projections. GPA expressed concerns about the conservative nature of the long term growth projections and the abrupt nature in which they are included in the economic evaluation of the project. Johnny Grandison (SAM) will arrange a meeting within the next couple of weeks in Mobile with Kevin Knight, Dr Moser, Beck Moyer, and Kevin Horne, to discuss the accuracy and reliability of growth projections and rates for Savannah Harbor. **Lead SAM (Grandison)**

11. Panama Canal Assumptions. Ian Mathis is familiar with the assumptions being proposed for the Panama Canal. Our assumptions should be validated by having him review the assumptions we have made about the Panama Canal deepening and widening. **Lead: SAM (Otto)**

12. Fleet Forecast and Vessel Operating Costs. Kim Otto will contact Becky Moyer regarding assumptions being made about fleet forecasts. Marianne Matheney-Katz will also talk to Ian Mathis (IWR) and provide feedback. **Lead: SAM (Otto)**

Bailey, William G SAS

From: Bailey, William G SAM@SAS
Sent: Thursday, March 22, 2007 12:20 PM
To: bisterfeld.ted@epa.gov; ed_eudaly@fws.gov; Kay Davy (kay.davy@noaa.gov); Garrett, Thomas A SAS; Hoke, Joseph T SAW@SAS
Cc: 'mueller.heinz@epamail.epa.gov'; 'Pace Wilber'; Bradley, Kenneth P SAM
Subject: Savannah Harbor Expansion Project: Decision on Model-To-Marsh Revisions
Attachments: EXPAN LCA M2M revision decision -- Mar 07 V2.doc

I have attached a decision document with my recommendation to (1) continue using movement of the 0.5 ppt point from the EFDC model, and (2) not pursue modifying the Model-To-Marsh link that we discussed on 8 March. Not revising the M2M will mean that we will use the Marsh Succession Models to identify wetland impacts from a harbor deepening (checking the predictions of the EFDC Model), but not with the various mitigation scenarios.

I have spoken to each of you separately and each expressed preliminary support for this approach.

Please let me know if you concur in the recommended course of action. If you want to sign the attached document, you may. But if you prefer, you can just send me an email letting me know whether you Concur or Non-Concur with the recommendation.

William Bailey

DECISION DOCUMENT

SUBJECT: Savannah Harbor Expansion Project;
Proposed revision to Model-To-Marsh linkage

1. A problem has developed with use of the Marsh Succession Models (MSMs) on some of the mitigation scenarios. The scenarios affected are those that substantially modify flows between the Front, Middle, and Back Rivers. The problem results in an overstatement of salinity in the Middle and Back Rivers, rendering the MSMs unreliable to evaluate wetland impacts on those scenarios. We've identified the Model-To-Marsh linkage (M2M) as the source of the problem.

2. The following two courses of action are available.

In Option 1, we would use the EFDC salinity model to identify wetlands that shift from fresh to brackish species. We would do this by examining what marshes change from <0.5 ppt to > 0.5 ppt salinity. We would apply that technique to both the "impact" and "mitigation" runs. We would use the MSM to provide more detail on the vegetation changes on the "impact" runs, thereby checking the EFDC results and increasing our confidence in the EFDC results. We would not use the MSM for "mitigation" runs. This Option describes our present condition and plan for proceeding with the wetland evaluations.

In Option 2, we would use the EFDC salinity model to identify wetlands that shift from fresh to brackish species. We would apply that technique to both the "impact" and "mitigation" runs. We would revise the M2M as described in the enclosed proposal and apply the MSM to both "impact" and "mitigation" runs.

3. The Lead and Cooperating Agencies discussed this issue on 8 March 2007. The MFR, which summarizes the discussions of the meeting, are attached.

4. The USGS would lead the work to revise the M2M. They estimate it would take \$110,750 and 12 months to produce a final product (including internal review). The work would include participation of an interagency team to identify flow paths from the rivers to specific locations in the marsh.

5. The following summarizes the pros and cons of proceeding with the proposed revisions (Option 2):

PROS

- The revisions would allow the Marsh Succession Models to be applied to all mitigation scenarios presently being considered. At this time, the MSMs do not give reliable results when applied to mitigation scenarios that substantially alter flows between the three rivers (Front, Middle and Back Rivers).
- The revisions would include the use of an interagency team, increasing the likelihood of those agencies approving the final product.

CONS

- The EFDC model in conjunction with spatial data can acceptably be used to identify movement of the 0.5 ppt contour, allowing predictions of change between freshwater and brackish marsh. Use of the MSM on the impact runs will provide a comparison of the EFDC and MSM impact predictions (without mitigation).
- Revision of the M2M would cost roughly \$110,000 and possibly delay decisions on the project by a year. The 1998 Feasibility Report estimated project net benefits (benefits – costs) to be about \$35,000,000 per year.
- The effectiveness of the proposed revisions and the reliability of the MSM results will not be known until after the work is performed. The proposal acknowledges substantial uncertainty regarding accuracy of salinity predictions even with the proposed revisions.
- The revised M2M may have to be further modified if additional mitigation scenarios are developed. The further modifications would require additional costs and possibly further delay decisions on the project.

6. Conclusions.

The project has one accepted method of identifying potential impacts to wetlands (using EFDC to identify movement of the 0.5 ppt contour).

The accuracy of that model can be judged by use of the Marsh Succession Models for impacts from deepening scenarios without mitigation.

Therefore, the revised M2M – and the Marsh Succession Models – are not required to identify wetland impacts from the various harbor deepening alternatives (with mitigation).

Implementation of the proposed M2M revisions would cost roughly \$110,000 and possibly delay decisions on the project by a year.

The additional information that may be obtained by revising the M2M does not appear to be sufficient to justify the cost of the modifications or delay to the project.

7. Recommendation.

Based on the information provided in this document and its enclosures, I believe that implementation of the proposed Model-To-Marsh revision is not warranted and recommend that the modifications not be pursued.



William Bailey
Physical Scientist
Mobile/Savannah Regional Planning Center

8. Concurrence:

	<u>CONCUR</u>	<u>NON-CONCUR</u>	<u>INITIALS</u>
Joseph Hoke Hydraulic Engineer USACE Wilmington/Savannah Engineering	_____	_____	_____
T. Alan Garrett Project Manager USACE Savannah District	_____	_____	_____
Ed EuDaly Senior Biologist USFWS Charleston	_____	_____	_____
Ted Bisterfeld Ecologist EPA Region 4	_____	_____	_____
Kay Davy Fishery Biologist NOAA Fisheries Charleston	_____	_____	_____

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project.
Lead & Cooperating Agency meeting, 08 March 07

1. The meeting was called to learn more about a proposal (attached) to revise the Model-To-Marsh (M2M) component of the Marsh Succession Models. Alan Garrett, Corps Project Manager, chaired the meeting. A list of attendees is attached.
2. Bill Bailey provided an overview of the problem.

The Corps has successfully run the Marsh Succession Models to identify changes in wetlands from the various channel deepening scenarios. These are the "impact" runs. As we applied the models to the mitigation scenarios, we observed unexpected results. For some mitigation scenarios, the EFDC runs predict a decrease in salinity but the MSMs show shifts to more saline wetland species. Upon further inspection, we observed that on those runs the M2M component was providing higher root zone salinity values than were occurring in nearby rivers. The M2M extrapolates riverine salinity values from seven sites to root zone salinity values across the entire marsh surface. Apparently the limited number of points from which the M2M is starting its extrapolation leads to inaccuracies in mitigation scenarios that substantially alter flows between the three rivers (Front, Middle and Back Rivers). The M2M takes higher salinity levels on the Front River and uses them as a basis for incorrectly predicting higher salinity levels in portions of Middle and/or Back Rivers.

3. We described two avenues through which the project could move forward.

In Option 1, we would use the EFDC salinity model to identify wetlands that shift from fresh to brackish species. We would do this by examining what marshes change from <0.5 ppt to > 0.5 ppt salinity. We would apply that technique to both the "impact" and "mitigation" runs. We would use the MSM to provide more detail on the vegetation changes on the "impact" runs, thereby checking the EFDC results and increasing our confidence in the EFDC results. We would not use the MSM for "mitigation" runs.

In Option 2, we would use the EFDC salinity model to identify wetlands that shift from fresh to brackish species. We would apply that technique to both the "impact" and "mitigation" runs. We would revise the M2M as proposed and apply the MSM on both "impact" and "mitigation" runs.

4. Paul Conrads and Ed Roehl provided an overview of the proposed SOW to revise the M2M. This write-up is only a small part of the description Paul and Ed provided.

The present M2M starts with river flows and tidal conditions. It adds to that foundation riverine salinity values from the EFDC model. The present M2M could be considered more a far-field approach since it uses a limited number of riverine salinity values and extrapolates them across the entire marsh surface. It determines a relationship between river salinity and the well gages through time-delayed input signals and moving window averages between river salinity and pore-water salinity. The M2M was designed to primarily identify changes in root zone salinity that occur longitudinally in the estuary (along the length of the river).

The proposed revisions would allow the M2M to better identify lateral changes in root zone salinity that occur across the estuary (between different rivers or away from a single river). These revisions would start with a more detailed network of river salinity stations. It would then extrapolate those values to nearby areas of marsh. This could be considered more of a near-field approach. Additional marsh well data would be obtained to establish strong relationships between river and marsh root zone salinities. The Q-zone approach would be used as a starting point for the river to marsh flow paths. An interagency panel would be used to identify those pathways and guide the model revisions.

Uncertainty in the results of this M2M revision include three components: (1) Quality of the original data, (2) Quality of the data used to forecast or hindcast to fill in missing data, and (3) Quality of the data from EFDC. These are the same sources of uncertainty with use of the present M2M. This revision will require development of additional synthetic data to fill in records for the extra river sites that will be used.

5. The group then asked questions of Paul and Ed Roehl about the proposed work.

What will be the reliability of the results when using more synthetic data? Would the public accept the use of more synthetic data? RESPONSE: The reliability will not be known until the model is produced. However, data for the existing M2M show it is highly reliable for use with the present configuration of the estuarine rivers. As with any model, the ultimate accuracy of the revised model's predictions would not be known until after post-construction monitoring is performed.

What will be the reliability of the results when using data from the GPA stations? Those data were determined to be unacceptable in development of the existing M2M. RESPONSE: Data from the GPA stations were not used in the existing M2M primarily because of their short period of record. A much longer – and therefore more reliable – record exists for the USGS gages. The GPA stations would be used in the model revisions to provide a finer grid of river locations from which to extrapolate salinity levels across the marsh surface. The finer grid should increase the accuracy and reliability of the model predictions within specific marsh areas. The additional stations

would also allow a more detailed quantification of the sensitivity of marsh areas to local riverine conditions. The GPA stations also provide data obtained during 1997 – the flow conditions that are being modeled during the mitigation analyses. The reliability of the revised models would not be known until they are developed.

What are the differences between the GPA stations, marsh gages, and USGS gages?

RESPONSE: The differences include both duration and density. The marsh gages provide salinity information in the marsh root zone at 7 sites from 1999 to 2005 and 10 GPA sites from 1999 to 2002. The GPA stations have 14 riverine stations with data from portions of 1997 and 1999. The USGS gages provide salinity information at 4 riverine sites for many years.

What will be the reliability of the final predictions if the development of the revised model includes extensive synthetic data? RESPONSE: Models are regularly developed and applied when only limited actual data exists. Synthetic data is an accepted technique in the modeling community when insufficient historical data exists.

If new algorithms need to be developed for each mitigation plan, it could appear that we have developed a model just to show the results we want on the plan we want. If the same model is not used to evaluate all plans, how can we ensure we are evaluating all plans to the same degree of accuracy? RESPONSE: The same procedures would be followed to evaluate all plans, even if the models differ.

The existing M2M and its algorithms appear to work well with the present river configuration. If new algorithms only are effective for the mitigation plans that substantially modify river flows, how can we ensure their accuracy? RESPONSE: The change from a “far-field” approach to a “near-field” approach increases the likelihood that the revisions would be accurate when flows are substantially modified. The reliability of the results will not be known until the models are developed.

The MSM provides more detailed information on expected wetland changes than does the EFDC model. Do we really need those more detailed predictions for each mitigation scenario? RESPONSE: If reviewers want the detailed information, the revised M2M is the only way to obtain it.

Although a provisional version may be available in 5 months, the project will need a fully accepted version before it could release a report containing results using this approach. The final report is scheduled to be available in 12 months. If complications occur that delay the work, the date would extend further. A 12-month delay in the project would be a major impact to GPA. RESPONSE: Reaching a timely decision on this project is a goal of all the Cooperating Agencies.

The proposed revisions would likely extend the duration of the project. That extension may decrease the reliability of other analyses, requiring they be updated. That would require additional time and money. RESPONSE: Reaching a timely decision on this project is a goal of all the Cooperating Agencies.

Some of the mitigation scenarios appear to decrease the tidal range. The USFWS may not be able to support those plans as a substantial decrease in the depth of flooding over the marsh may adversely affect nekton use of those areas. The plans which have the most effect on tidal range are the ones that substantially alter flows between the three rivers.

RESPONSE: The proposed M2M revisions would not be beneficial if the final mitigation plans do not include measures that substantially alter flows between the three rivers.

Have the status and trends of wetlands since the last harbor deepening been taken into account? RESPONSE: Both the M2M and the MSM are based on data obtained since the last deepening.

Would the proposed revisions be necessary for the post-construction monitoring and adaptive management? RESPONSE: The EFDC will be used to ensure that changes in riverine salinity that are predicted are not exceeded. The existing M2M and MSM could be used to provide a perspective on what should have been expected in the wetlands with the observed flows if no further deepening occurs.

William Bailey
Physical Scientist

SAVANNAH HARBOR EXPANSION PROJECT

LEAD & COOPERATING AGENCY MEETING

08 MAR 2007

ATTENDEES

Ed EuDaly	USFWS – Charleston	(by phone)
Ted Bisterfeld	EPA Region 4	(by phone)
Kay Davy	NOAA Fisheries - Charleston	(by phone)
Alan Garrett	USACE - Savannah	
Joe Hoke	USACE – Wilmington/Savannah	
Hugh Heine	USACE – Wilmington	(by phone)
Elizabeth Godsey	USACE – Mobile	(by phone)
William Bailey	USACE – Mobile/Savannah	
Hope Moorer	GPA	(by phone)
Larry Keegan	Lockwood-Greene Engineers / GPA	(by phone)
Morgan Rees	Rees Engineering / GPA	(by phone)
Paul Conrads	USGS – Columbia	(by phone)
Ed Roehl	Advanced Data Mining	(by phone)

Estimation of Pore-water Marsh Salinities for Harbor Reconfiguration Scenarios

By

Paul Conrads, U.S. Geological Survey – Water Resources Division
Edwin Roehl, Advanced Data Mining, LLC
Wiley Kitchens, U.S. Geological Survey – Biological Resources Division
Zachariah Welch, Florida Coop Unit, University of Florida,

INTRODUCTION

Under sponsorship from the U.S. Army Corps of Engineers (USCOE) and the Georgia Ports Authority (GPA), the Lower Savannah River Estuary and the surrounding freshwater tidal marshes of the Savannah National Wildlife Refuge (SNWR) have been studied for years by a variety of governmental agencies, water users, universities, and consultants. Their interests are in maintaining water quality and predicting the potential impacts of a proposed harbor deepening on the estuary and tidal wetlands. Two major initiatives were the development of a three-dimensional hydrodynamic model (3DM) by a team of hydrologists, and the development of a marsh succession model (MSM) by a team of plant ecologists. The 3DM predicts changes in riverine water levels and salinity in the system in response to potential harbor changes. The MSM predicts plant distribution in the tidal marshes in response to changes in the water-level and salinity conditions in the marsh. A mechanism for linking riverine and marsh behaviors was needed.

To support 3DM and MSM development, many disparate databases were created that described the natural system's complexity and behaviors, but these databases had not been compiled into a usable form. Variables having particular relevance include those describing bathymetry, meteorology, streamflow (Q), water level (WL), specific conductance (SC), water temperature (WT), and dissolved oxygen concentration (DO). Most of the databases were composed of time series that varied by variable type, periods of record, measurement frequency, location, and reliability. Scientists recognized that data-mining techniques, which include artificial neural networks (ANN), could be used to link riverine and marsh behaviors.

To link the riverine predictions of the 3DM to the MSM, a "model to marsh" ($M2M$) model was developed by the U.S. Geological Survey and Advanced Data Mining (ADM) using data mining techniques that included ANN models. The ANN s simulated riverine and marsh water levels and salinity in the vicinity of the SNWR for the full range of 11½ years of data from riverine and marsh gaging networks. With $M2M$, the 3DM and MSM comprise an integrated decision support system for use by various regulatory and scientific stakeholders. The development and application of the $M2M$ is described in Conrads and others (2006).

The $M2M$ has been successfully applied to evaluate the effects of deepening the harbor by generating the inputs to the MSM from the outputs of the 3DM. The $M2M$ also has been used to evaluate potential mitigation scenarios for minimizing the impacts from

harbor deepening. These mitigation scenarios included minor and major changes in channel configuration and flow distribution in the system.

PROBLEM STATEMENT

Eight mitigation scenarios that involve major structural changes in the vicinity of the SNWR, such as the installation of flow diversion structures and the cutting and filling of channels, have been proposed for evaluation. The M2M was not designed to accommodate mitigation scenarios that involve major structural changes. Currently (2007) there is not a mechanism for reliably estimating pore-water salinities in the marsh from riverine inputs for these major mitigation scenarios.

The responses of the SNWR to major changes are very likely to be different from any behaviors ever manifest in the historical record. While the 3DM can be configured to estimate riverine WL and SC with the major changes, it is limited to riverine estimates and cannot be credibly configured to estimate pore-water salinities in the marsh. Using data mining techniques, Conrads and others (2006) found that pore-water salinities integrate riverine WL and salinity variability over several months and often there are long time delays between riverine salinity conditions and marsh pore-water salinity response. A new tool similar to the M2M, hereafter referred to as M2M.2, needs to be developed to estimate pore-water salinity concentrations to evaluate mitigation scenarios involving major structural changes. To provide the necessary technical input and agency review, it is proposed that a multi-agency and multi-disciplinary technical working group be formed of the USGS-S.C. Water Science Center (USGS-SCWSC), the USGS-Florida Coop Unit (USGS-FCU), U.S. Fish and Wildlife Service (USFWS), U.S. Army Corps of Engineers (USACE), and Advanced Data Mining (ADMi).

OBJECTIVES

There are three objectives for this project.

1. *Develop new marsh salinity estimation models* – for estimating pore-water salinities at marsh gaging sites for various mitigation model scenarios, using either measured or predicted river water level and specific conductance data at gage locations. It is possible that algorithms would have to be developed for each mitigation scenario.
2. *Develop new salinity spatial interpolation scheme(s)* – that estimate salinities throughout the SNWR from the USGS marsh gaging sites. The current scheme is embedded in the M2M's two-dimensional visualization and gridding application (2DVG). The new schemes must reflect greater lateral variation in the pore-water salinity than the current scheme. It is possible that new schemes would be created for each mitigation scenario.
3. *Develop M2M.2 2DVG and Simulator Applications* – to deploy the work products from Objectives 1 and 2. This includes adapting the 2DVG and the M2M Simulator, which estimates salinities at the USGS marsh gages.

SCOPE

The scope of this study is to address the relation between the riverine salinity and the pore-water marsh salinity for harbor deepening mitigation scenarios. The study's major tasks are described below.

- Task 1** *Develop Pore-water Estimation Matrix* – that defines the usable permutations of input USGS or GPA river gages to estimate salinities at each marsh gaging station for each mitigation scenario. Consideration will be given to the proximities of gages and flow diversion structures, and the overall quality of input gage measured, forecasted, and hindcasted data used for developing or generated by the M2M.
- Task 2** *Develop predictive models* - for each permutation defined in Task 1. This involves determining optimal time delays and moving window averages between river salinity and pore-water responses through correlation analysis. ANNs provide the best possible correlations in terms of the process information they provide and their prediction accuracy. The number of models to be developed depends on the permutations defined in Task 1.
- Task 3** *Define area of influence and spatial gradient of the USGS marsh gages* - for the new salinity spatial interpolation scheme.
- Task 4** *Develop M2M.2 2DVG application* - to reflect findings from Task 3. It is likely that multiple visualizations and grids will need to be developed to accommodate all of the mitigation scenarios.
- Task 5** *Develop M2M.2 Simulator* – like M2M, it will integrate the 3DM with the MSM using the models from Task 2 and the M2M.2 2DVG application from Task 4, but tailored for the mitigation scenarios involving major structural changes.
- Task 6** *Document the approach and results.*

RELEVANCE AND BENEFITS

An important part of the USGS mission is to provide scientific information for the effective water-resources management of the Nation. To assess the quantity and quality of the Nation's surface-water, the USGS collects hydrologic and water-quality data from rivers, lakes, and estuaries using standardized methods, and maintains the data from these stations in a national database. Often these databases are under utilized and under interpreted for addressing contemporary hydrologic issues. The techniques used to develop the M2M and models of the Cooper River (Conrads and Roehl, 1999), the Beaufort River (Conrads and others, 2003), and the Pee Dee River (Conrads and Roehl, 2006) demonstrate how valuable information can be extracted from existing databases to assist local, state and Federal agencies.

The project benefits the Georgia Ports Authority and the Army Corps of Engineers by providing data analysis needed by water-resource managers to make decisions concerning mitigation of the Savannah River Estuary to accommodate potential deepening of Savannah Harbor. The project builds on previous studies relating river salinity to marsh pore-water response. This is consistent with primary USGS activities that include providing knowledge and expertise to assist various levels of government in understanding and solving critical water-resources problems.

TECHNICAL APPROACH

The historical data do not contain information explicitly about the impacts of the proposed mitigation scenarios involving major structural changes. For these circumstances, the best available data, tools, and human expert knowledge and experience must be brought to the problem. The development and use of the M2M.2, and related findings will provide the best possible resources for evaluating the major mitigation scenarios.

Available Data and Utilities from M2M Study

The M2M is based on river and marsh WL and SC ANN models for the USGS and GPA gaging stations in the river and marshes. These are empirical models and for a system as complex as the Savannah River estuary, it was critical that measured, not estimated, data were used that cover the greatest range of hydrologic and tidal responses. For making predictions of pore-water salinity, the most valuable data for M2M development were from the long-term USGS river and marsh gaging stations, which covered over 11 years and 5 years respectively, and comprise a range of flow conditions from drought to floods. Of lesser value were the GPA river and marsh data, which were limited to short measurement periods and a small range of hydrologic conditions. The USGS river data are the major inputs for the final pore-water salinity models and a few of the GPA stations are used to reduce the error in the pore-water models.

The M2M Simulator and 2DVG applications will be valuable for estimating pore-water salinity for the major mitigation scenarios. The Simulator integrates a collection of individual models of the GPA and USGS river gages with the various field databases, such that all of the WL and SC data from the river gages were individually modeled. By hindcasting and forecasting the short-term data collection periods at the GPA sites, a complete database was generated for the 11½ year period from 1994 to 2005. This feature was incorporated to allow scientists and managers to simulate any period from the last deepening and analyze system responses at any gage location. The 2DVG provides spatial interpolation-extrapolation and visualization of the marsh responses across the marsh wells. It is easily modified to accommodate new pore-water estimates at the USGS marsh sites and new interpolation-extrapolation schemes across the marsh.

Pore-water Estimates for Mitigation Scenarios

The MSM models use the growing-season average pore-water salinity as input. The measured, forecasted, and hindcasted SC records at the GPA river sites can be used in conjunction with the USGS sites to determine the best estimates of the average pore-water salinity during the growing season. Estimates will be based on the assumption that a marsh gage responds to nearby river gage(s) and that the candidate river gage(s) may vary by mitigation scenario. Often good correlations between two time series, such as river and marsh SC, can be obtained by adjusting the time delay and moving window average of the explanatory variable (river SC) to achieve the highest correlation with the response variable (marsh SC). For highly dynamic SNWR, trend information proved invaluable for estimating inertia-driven behaviors. Representing trends requires at least two input variables whose values represent two different times or two different locations at the same time, or both.

To estimate pore-water responses to mitigation scenarios, river sites will be selected as candidate explanatory variables for each mitigation plan. For example, the schematic for Mitigation Plan 5 is shown in figure 1. In this scenario, it is believed that salinity intrusion occurs further up the Front River and that freshwater flows increase down the Little Back River. The riverine gages closest to the Middle River 1 (M1) for estimating its pore-water salinity are GPA12 and GPA12r. For Back River 2 (B2), gages 8979, 89784, and GPA15 appear to be good candidates. Final river site selection will be based on the quality of the measured, hindcasted, and forecasted GPA data.

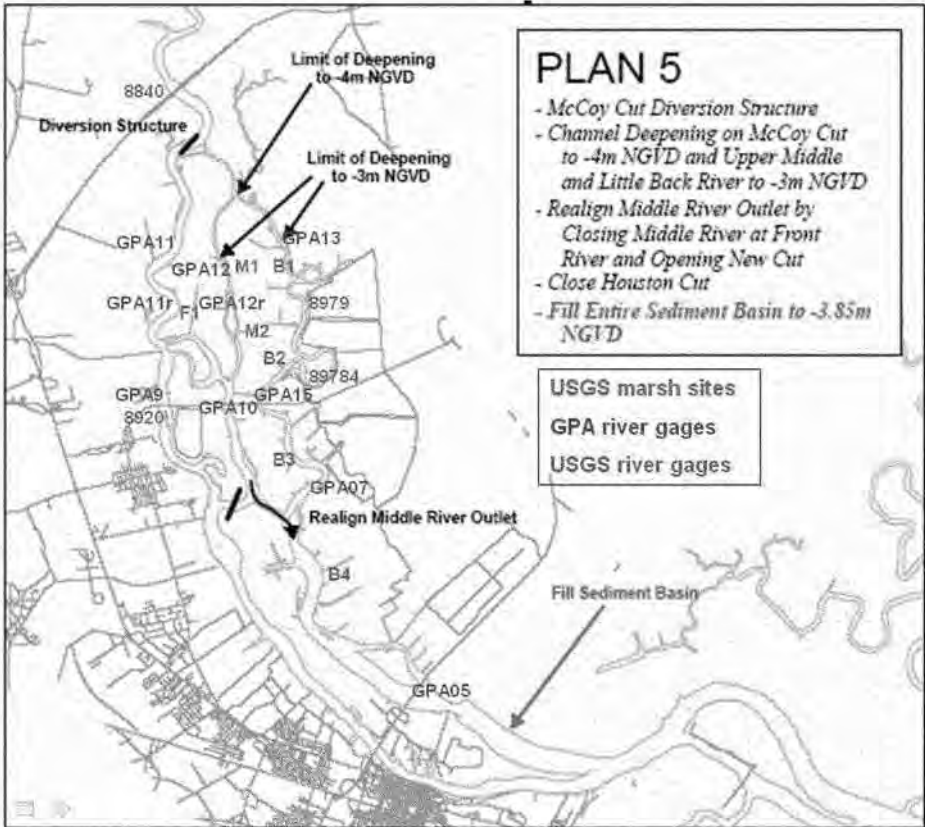


Figure 1. Locations of river and marsh gages and schematic of Plan 5 mitigation scenario

The Pore-water Estimation Matrix will be developed of mitigation plans, marsh gages, and candidate river sites. It is anticipated that some of the plans will share configurations of river gages to marsh gages. Pore-water estimates will be determined for each plan and the estimates will be compared with the predictions made with the original ANN models of the M2M.

Pore-Water Salinity Projections Across the Marsh

The time-series data of the individual marsh gages depict the longitudinal gradient of the system to various hydrologic and tidal conditions. The time-series data do not support the lateral gradients in the system. The M2M's 2DVG is based on estimates of the longitudinal variations from model predictions at the marsh sites. A simple interpolation scheme is used to estimate the lateral gradients.

For the mitigation scenarios, marsh wells will be assigned to the vegetative zones (Q-zones) depicted in Figure 2 and added to the Pore-water Estimation Matrix. Lateral variation across the marsh will be based on field experience and limited data taken during transect studies by the Florida Coop Unit (FCU) at the University of Florida.



Figure 2. Locations of Q-zones in the tidal marsh in the vicinity of the Savannah National Wildlife Refuge

Integration of Hydrodynamic Model and Marsh Succession Models – M2M.2

Like M2M, M2M.2 will integrate output from the 3DM and generate the marsh salinity grid for input to the MSM. Linking the 3DM is accomplished by reading in a file of simulated differences in SC values for the river for the mitigation plan scenarios. The use of differences, or deltas, from the 3DM increases the prediction accuracy of the model. Mechanistic model, such as the 3DM, typically are better suited from predicting relative differences between two conditions rather than making absolute predictions for one

scenario. The differences (deltas) from the 3DM are added to the historical time series for the scenario and then used in the M2M.2. The application estimates pore-water salinity at the marsh gages and the salinity grid is generated for input to the MSM applications.

Figure 3 describes the data and workflow from the 3DM, through the M2M.2 Simulator and 2DVG applications, and to the MSM. Here, the eight mitigation scenarios are handled separately, providing each with completely customized solution bearing the best ideas of the multi-disciplinary team. At left the 3DM is run for each scenario and separate output files are generated. Next at top center, in the M2M.2 Simulator the user selects the scenario to be run, the appropriate 3DM output file is loaded, the appropriate prediction models are engaged, a simulation is run, and an output file of marsh specific conductivities is generated. Next at right, in the M2M.2 2DVG the user selects the scenario to be run, the M2M.2 Simulator output file is loaded, and an output file of spatially interpolated marsh salinities is generated, which can be loaded into the MSM.

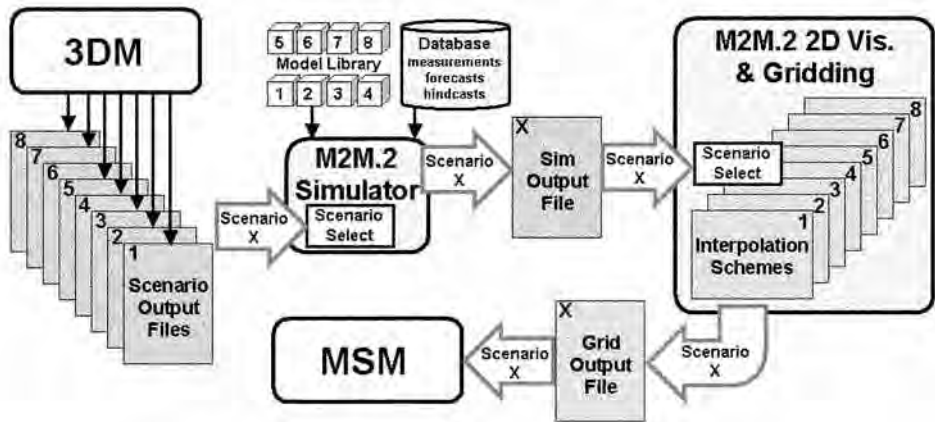


Figure 3. Schematic of data and workflow through the M2M.2.

UNCERTAINTY OF OUTCOME

In this technical approach, each scenario will have a custom solution developed by a multi-disciplinary technical team composed of the USGS-SCWSC, the USGS-FCU, the USFWS, USACOE, and ADMi personnel that are most knowledgeable in the issues, history, and science of the harbor deepening. As with the M2M, the behaviors and predictive performance of the new “local” models of the M2M.2 will be fully described to the technical team. The performance of the models is expected to be comparable to those of the M2M, with the major sources of uncertainty to be associated with the quality of the data collected from the GPA sites, the quality of the SC hindcasts and forecasts at the GPA sites, and the accuracy of the 3DM predictions.

Generally, the 3DM prediction accuracy of flow and salinity throughout the model domain are better on the Front River and lower portion of the system. The prediction

accuracy is not as good in the vicinity of the SNWF and farther inland in the system. This can be seen in the summary statistic of the model performance for the 50 percentile and the coefficient of determination for the 1999 calibration data and the 1997 validation data set (Tetra Tech, 2006). The accuracy of estimates made by the 3DM for scenarios involving major structural changes is unknowable *a priori*, but very likely to be less accurate than the calibration and validation prediction. The use of differences from the 3DM will reduce absolute prediction error by the model. The 3DM's performance will be the primary source of uncertainty, but significant reliance on its estimates inside the SNWR is unavoidable.

The technical team will leverage the tools in hand to formulate a process of mitigating deepening-related problems. The process may employ a succession of structural changes of varying impact severity. It is likely that each change will have surprising results that can only be determined *post priori* by continued field monitoring and data analysis. This suggests a conservative, iterative mitigation approach composed of these steps - hypothesize, change, test, review, and most importantly, learn will be required.

PROJECT COORDINATION

In making estimates of system responses to the structural changes in the SNWR, it is essential that the appropriate technical resources from the agencies be involved. It is proposed that periodic meetings of the technical working group (USCOE, USF&W, USGS-SCWSC, USGS-FCU, and ADMI) be scheduled to review interim products such as the pore-water estimation matrix, pore-water estimation models, and prototypes of the M2M.2 2DVG and M2M.2. Many of these meetings could be accomplished by teleconferencing.

REPORTING

The project will be documented in a USGS Open-File Report, tentatively titled "Estimation of Tidal Marsh Pore-water Salinity in the Vicinity of Savannah National Wildlife Refuge for Savannah Harbor Deepening Mitigation, Coastal South Carolina and Georgia." A provisional copy of the report will be available for colleague/cooperator review 3 months after the completion of the project. The review process will require an additional 5 months. A limited number of paper copies of the report will be provided to the cooperating agencies; however, the primary outlet for the publication will be the Internet. A link to the report will be posted on the USGS South Carolina Water Science Center web sites.

BUDGET AND SCHEDULE


The Project will be collaboration between the USGS-SCWSC, the USGS-FCU, and ADMI. The project will take approximately 4-5 months to complete the technical analysis and develop the provisional M2M.2 from the start date. The final documentation of the project will be complete approximately 10-12 months from the start date. The total cost of the project will be \$110,750. An itemized description of the tasks and required hours

are listed in Table 1 and a timeline for completion of the project from initiation is presented in Table 2.

Table 1. Tasks, description, notes, hours, and costs.

Task #	Description	Notes	USGS-SCWSC Hours	USGS-SCWSC Cost	USGS-FCU Hours	USGS-FCU Cost	ADMI Hours	ADMI Cost
1	Develop Pore-water Estimation Matrix	tooling up, evaluate data quality, matrix development, meeting with Agencies to finalize matrix	40	\$4,400			40	\$5,000
2	Develop predictive models	upper limit = 8 scenarios x 7 models per = 56 models, x 8hrs/model, use 50% - USGS-SCWSC to review	25	\$2,750			224	\$28,000
3	Define area of influence and spatial gradient of the USGS marsh gages	mostly USGS-FCU with assistance from USGS-SCWSC, ADMI to assimilate, meeting for concurrence with Agencies prior to finalization	40	\$4,400	64	\$6,400	12	\$1,500
4	Develop M2M 2 2DVG application	assume 8 interp schemes to program/integrate at 2days per - USGS-SCWSC to review	25	\$2,750			128	\$16,000
5	Develop M2M 2 Simulator	assume 4 weeks for mostly new but derivative app programming and testing - USGS-SCWSC to rev	25	\$2,750			160	\$20,000
6	Document the approach and results.	mostly USGS-SCWSC and USGS-Publications Unit, ADMI and USGS-FCU to assist	120	\$13,200	16	\$1,600	16	\$2,000
Totals			275	\$30,250	80	\$8,000	580	\$72,500

Table 2. Timeline for completion of project.

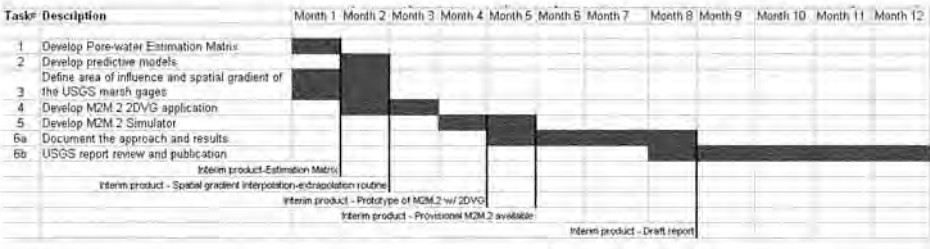

REFERENCES

- Conrads, P.A. and E.A. Roehl, 1999, Comparing physics-based and neural network models for predicting salinity, water temperature, and dissolved oxygen concentration in a complex tidally affected river basin, South Carolina Environmental Conference, Myrtle Beach, March 1999.
- Conrads, P.A., Roehl, E.A., and W.P. Martello, 2003, Development of an empirical model of a complex, tidally affected river using artificial neural networks, Water Environment Federation TMDL Specialty Conference, Chicago, Illinois, November 2003.
- Conrads, P.A., Roehl, E.A., Daamen, R.C., and W.M. Kitchens, 2006, Simulation of water levels and salinity in the rivers and tidal marshes in the vicinity of the Savannah National Wildlife Refuge, Coastal South Carolina and Georgia, U.S. Geological Survey Scientific Investigations Report 2006-5187.
- Conrads, P.A. and Roehl, E.A., 2006, An artificial neural network-based decision support system to evaluate hydropower releases on salinity intrusion, *Hydroinformatics 2006*, edited by Philippe Gourbesville, Jean Cunge, Vincent Guinot, Shie-Yui Liong, Vol. 4, p. 2765-2772.
- Tetra Tech, 2006, Development of the hydrodynamic and water quality models for the Savannah Harbor Expansion Project. Prepared for the U.S. Army Corps of Engineers – Savannah District, Tetra Tech, Inc. Atlanta, Georgia.

From: Ed_Eudaly@fws.gov
To: Bailey.William.G.SAM@SAS
Cc: bisterfeld.ted@epa.gov; Hoke.Joseph.T.SAW@SAS; kay.davy@noaa.gov; Bradley.Kenneth.P.SAM@mueller.heinz@epamail.epa.gov; Pace.Wilber@Garrett.Thomas.A.SAS; John.Robinette@fws.gov; Jane.Griess@fws.gov; Russell.Webb@fws.gov
Subject: Re: Savannah Harbor Expansion Project: Decision on Model-To-Marsh Revisions
Date: Tuesday, March 27, 2007 8:56:50 AM

Bill:

I concur with your recommendation to not pursue modification of the model-to marsh link. I have coordinated with Savannah NWR and they also concur. Please consider this e-mail as Service concurrence with your recommendation.

Ed Eudaly
 U.S. Fish and Wildlife Service
 176 Croghan Spur Road, Suite 200
 Charleston, SC 29407
 843-727-4707 ext. 227
 FAX 843-727-4218

"Bailey, William G SAM@SAS" <William.G.Bailey@sas02.usace.army.mil>

03/22/2007 12:19 PM To
 <bisterfeld.ted@epa.gov>, <ed_eudaly@fws.gov>, <kay.davy@noaa.gov>, "Garrett, Thomas A SAS"
 <Thomas.A.Garrett@sas02.usace.army.mil>, "Hoke, Joseph T SAW@SAS"
 <Joseph.T.Hoke@sas02.usace.army.mil>
 cc
 <mueller.heinz@epamail.epa.gov>, "Pace Wilber" <Pace.Wilber@noaa.gov>, "Bradley, Kenneth P SAM"
 <Kenneth.P.Bradley@sam.usace.army.mil>
 Subject
 Savannah Harbor Expansion Project: Decision on Model-To-Marsh Revisions

I have attached a decision document with my recommendation to (1) continue using movement of the 0.5 ppt point from the EFDC model, and (2) not pursue modifying the Model-To-Marsh link that we discussed on 8 March. Not revising the M2M will mean that we will use the Marsh Succession Models to identify wetland impacts from a harbor deepening (checking the predictions of the EFDC Model), but not with the various mitigation scenarios.

<<EXPAN LCA M2M revision decision -- Mar 07 V2.doc>>

I have spoken to each of you separately and each expressed preliminary support for this approach.

Please let me know if you concur in the recommended course of action. If you want to sign the attached document, you may. But if you prefer, you can just send me an email letting me know whether you Concur or Non-Concur with the recommendation.

William Bailey [attachment "EXPAN LCA M2M revision decision -- Mar 07 V2.doc" deleted by Ed Eudaly/R4/FWS/DOI]

From: Mueller.Heinz@epamail.epa.gov
To: Bailey.William.G.SAM@SAS
Cc: Welhorn.Tom@epamail.epa.gov
Subject: RE: Savannah Harbor Expansion Project - Decision on Model-To-Marsh proposal
Date: Monday, April 02, 2007 11:20:02 AM

Bill, per our earlier e-mail, R4 concurs with your proposed approach.
 Heinz

"Bailey, William G SAM@SAS" <William.G.Bailey@sas02.usace.army.mil>	To Heinz Mueller/R4/USEPA/US@EPA cc
04/02/2007 11:12 AM	Subject RE: Savannah Harbor Expansion Project - Decision on Model-To-Marsh proposal

Did you hear anything from Water Mgt Division?

BB

-----Original Message-----

From: Mueller.Heinz@epamail.epa.gov
[\[mailto:Mueller.Heinz@epamail.epa.gov\]](mailto:Mueller.Heinz@epamail.epa.gov)
 Sent: Thursday, March 29, 2007 11:47 AM
 To: Bailey, William G SAM@SAS
 Cc: Hamilton.John@epamail.epa.gov
 Subject: Re: Savannah Harbor Expansion Project - Decision on
 Model-To-Marsh
 proposal

Yes Bill, the way Ted left it that unless I hear from the Water Div to the contrary by COB today, we will send you a concurrence e-mail tomorrow morning. HM

"Bailey, William G SAM@SAS" <William.G.Bailey@sas02.usace.army.mil>	To Heinz Mueller/R4/USEPA/US@EPA cc
---	---

03/29/2007 10:42

AM

Subject

Savannah Harbor Expansion Project
- Decision on Model-To-Marsh
proposal

Ted Bistereld said he would be out of the office this week and next. Is someone continuing actions to obtain an EPA position on my recommendation concerning the USGS proposal to modify the Model-To-Marsh linkage?

BB

Sent from my BlackBerry Wireless Device

From: [Hoke, Joseph T SAW@SAS](mailto:Hoke_Joseph.T.SAW@SAS)
To: [Bailey, William G SAM@SAS](mailto:Bailey.William.G.SAM@SAS); [Garrett, Thomas A SAS](mailto:Garrett.Thomas.A.SAS)
Cc: [Bradley, Kenneth P SAM](mailto:Bradley.Kenneth.P.SAM)
Subject: RE: SH Expansion - decision on M2M
Date: Monday, April 02, 2007 7:44:02 AM

I concur that we do not need to modify the M2M. The alternatives that it was designed to address appear to be of little interest to the agencies now, given their impacts on tide range.

Joseph T. Hoke, Jr., P.E.
 Hydraulic Engineer
 U.S. Army Corps of Engineers
 Wilmington District (SAW-TS-EC)
 100 West Oglethorpe Ave.
 Savannah, GA 31401
 912-652-5516

-----Original Message-----

From: Bailey, William G SAM@SAS
 Sent: Tuesday, March 27, 2007 5:11 PM
 To: Garrett, Thomas A SAS
 Cc: Hoke, Joseph T SAW@SAS; Bradley, Kenneth P SAM
 Subject: SH Expansion - decision on M2M

I've received concurrence in my recommendation from 2 of the 3 agencies. The one I have not heard from is now out of the office for 2 weeks.

I have not heard from either of the 2 Corps folks included on the concurrence/non-concurrence list.

BB

 Sent from my BlackBerry Wireless Device

From: [Garrett, Thomas A SAS](#)
To: [Bailey, William G SAM@SAS](#)
Subject: FW: SH Expansion - decision on M2M
Date: Monday, April 02, 2007 10:40:53 AM

Based on the meetings held on this subject and the opinions of the technical modellers, I concur that modification of the M2M is not necessary.

T. Alan Garrett
 Project Manager

-----Original Message-----

From: Hoke, Joseph T SAW@SAS
 Sent: Monday, April 02, 2007 7:44 AM
 To: Bailey, William G SAM@SAS; Garrett, Thomas A SAS
 Cc: Bradley, Kenneth P SAM
 Subject: RE: SH Expansion - decision on M2M

I concur that we do not need to modify the M2M. The alternatives that it was designed to address appear to be of little interest to the agencies now, given their impacts on tide range.

Joseph T. Hoke, Jr., P.E.
 Hydraulic Engineer
 U.S. Army Corps of Engineers
 Wilmington District (SAW-TS-EC)
 100 West Oglethorpe Ave.
 Savannah, GA 31401
 912-652-5516

-----Original Message-----

From: Bailey, William G SAM@SAS
 Sent: Tuesday, March 27, 2007 5:11 PM
 To: Garrett, Thomas A SAS
 Cc: Hoke, Joseph T SAW@SAS; Bradley, Kenneth P SAM
 Subject: SH Expansion - decision on M2M

I've received concurrence in my recommendation from 2 of the 3 agencies. The one I have not heard from is now out of the office for 2 weeks.

I have not heard from either of the 2 Corps folks included on the concurrence/non-concurrence list.

BB

 Sent from my BlackBerry Wireless Device

From: [Bailey, William G SAM@SAS](mailto:Bailey.William.G.SAM@SAS)
To: ed_eudalv@fws.gov; "[Ted Bisterfeld \(bisterfeld.ted@epa.gov\)](mailto:Ted.Bisterfeld@epa.gov)"; "[Kay Davy \(kay.davy@noaa.gov\)](mailto:Kay.Davy@noaa.gov)"; hmoorer@gsa.gov
Cc: [Garrett, Thomas A SAS](mailto:Garrett.Thomas.A.SAS); [Bradley, Kenneth P SAM](mailto:Bradley.Kenneth.P.SAM); [Small, Daniel I SAD](mailto:Small.Daniel.I.SAD); [Barnett, Dennis W SAD](mailto:Barnett.Dennis.W.SAD); [Kopecky, Steven A HQ02](mailto:Kopecky.Steven.A.HQ02); [Matusiak, Mark HQ02](mailto:Matusiak.Mark.HQ02)
Subject: Savannah Harbor Expansion Project: Cooperating Agencies
Date: Wednesday, March 26, 2008 6:23:50 PM
Attachments: [EXPAN Mitigation Plan Summary 26Mar08.doc](#)

I've attached a summary of the preliminary mitigation plans. We have not fleshed-out all the details of the various features, but I believe this summary is sufficient to use for plan comparison/selection purposes. Some items are shown on the second page as being included with a "YES". Those items would not change by channel depth alternative.

These plans have not yet been coordinated with the natural resource agencies or the public. This distribution to you is the first they have been seen beyond those who participate regularly in the weekly PDT meetings. We're sending this to you as representatives of the Cooperating Agencies. We will make a wider distribution later when we have firmed up more details.

My next mitigation task is to write up a description of these plans (and hopefully the rationale we used to develop them) so that the USFWS can prepare a Planning Aid Report. That PAR will be available for the AFB and is intended to be an early version of the multi-agency Fish and Wildlife Coordination Act Report. I should be sending our description out in about 3 weeks.

Bill Bailey

SAVANNAH HARBOR EXPANSION PROJECT

SUMMARY OF MITIGATION PLANS

During development of the project, numerous means were taken to avoid and/or minimize adverse environmental impacts. Those means were included in the various depth alternatives and are to be incorporated into the recommended plan. Where adverse impacts to natural resources could not be avoided, mitigation of significant adverse impacts was included. The natural resource mitigation plan consists of the following components:

- Constructing and operating flow re-routing features in and near the Savannah National Wildlife Refuge to reduce salinity impacts to tidal freshwater and brackish wetlands;
- Acquiring bottomland hardwoods/freshwater wetlands to compensate for salinity increases to tidal freshwater wetlands. The acquired lands would become part of the Savannah National Wildlife Refuge and be managed by the US Fish and Wildlife Service;
- Constructing and operating a dissolved oxygen system to remove the incremental effects of this harbor deepening project;
- Constructing and operating a fish bypass channel at the New Savannah Bluff Lock and Dam to compensate for impacts to Shortnose sturgeon habitats;
- Funding a striped bass stocking program to compensate for adverse impacts to striped bass spawning and nursery habitats within estuary;
- Constructing a secondary water intake line, located further upstream, to address uncertainties in the predictions of impacts to the City of Savannah's municipal and industrial water withdrawal from Abercorn Creek;
- Monitoring prior to, during, and after construction to (1) ensure that any major unexpected adverse impacts are identified early, and (2) provide information to assess whether the project and mitigation are functioning as expected. The monitoring would vary over time and generally include hydrodynamics, water quality, wetlands and Shortnose sturgeon;
- Implementing adaptive management features if post-construction monitoring shows them to be needed. Those features consist of removing the Tidegate

sill, enlarging the diversion structure at the mouth of McCoy's Cut, a diversion structure at the junction of Middle and Back Rivers, and acquisition of up to another 10 percent of freshwater wetlands. Implementation of any or all of these features may not be needed, but the project would include funding sufficient to implement all of them. Which of these features would be implemented would depend on the findings of the monitoring.

The mitigation plan is designed to address adverse impacts to tidal wetlands (including freshwater, brackish, and salt marshes), levels of dissolved oxygen in the harbor, endangered Shortnose sturgeon habitat, Striped bass spawning and nursery areas, and chloride levels at a City of Savannah water intake.

A cultural resource mitigation plan is included for the CSS Georgia, a site listed on the National Register of Historic Places. The CSS Georgia is a Confederate ironclad that rests on the bottom of the river adjacent to the navigation channel near Back River. The wreck was found to be in poor condition. The District determined that the wreck must be removed, recovered to the extent possible, documented, and items of historic significance curated to prevent further loss to any remaining components of the site. These actions would be performed during construction of the harbor deepening.

The mitigation plans would vary by channel depth alternative as follows:

	CHANNEL DEPTH ALTERNATIVE			
	44-FOOT	45-FOOT	46-FOOT	48-FOOT
FLOW RE-ROUTING	Plan 6B	Plan 6A	Plan 6A	Plan 6A
WETLAND ACQUISITION	136 Acres	1,129 Acres	1,219 Acres	2,230 Acres
DISSOLVED OXYGEN SYSTEM	52,800 lbs/day	39,600 lbs/day	46,200 lbs/day	61,600 lbs/day
FISH BYPASS CHANNEL	Yes	Yes	Yes	Yes
STRIPED BASS STOCKING PROGRAM	\$54,800 Per Year	\$44,500 Per Year	\$49,500 Per Year	\$69,100 Per Year
SECONDARY WATER INTAKE LINE	Yes	Yes	Yes	Yes
CSS GEORGIA	Yes	Yes	Yes	Yes
POST-CONSTRUCTION MONITORING	Yes	Yes	Yes	Yes
ADAPTIVE MANAGEMENT -- FLOW CHANGES	Yes	Yes	Yes	Yes
ADAPTIVE MANAGEMENT -- LAND ACQUISITION	14 Acres	113 Acres	122 Acres	223 Acres

NOTE: Where "Yes" is included, the feature would not vary by channel depth.

From: Bailey, William G SAM@SAS
To: "Ed Eudaly"; "Kay Davy (kay.davy@nona.gov)"; "Ted Bisterfeld (bisterfeld.ted@epa.gov)"
Cc: "Kelie Moore@coastal.dnr.state.ga.us"; "Brad Gane@dnr.state.ga.us"; "Keith Parsons@mail.dnr.state.ga.us"; "Tim Barrett@dnr.state.ga.us"; "Jeff Larson@dnr.state.ga.us"; "Wade Cantrell"; "beckhaio@dhec.sc.gov"; "Priscilla H Wendt (wendt@dnr.sc.gov)"; "Larry Turner"; "Rheta Gaddings"; "Bob Perry"; "pconrads@usgs.gov"; "Pace Wilber"; "Stephanie Bolden"; "Mueller, Heinz J."; "greenfield.jim@epa.gov"; "Bill Wilkoff@fws.gov"; Bradley, Kenneth P SAM; Okane, Jason D SAS; Flakes, Curtis M SAM
Subject: Savannah Harbor Expansion Project - Monitoring and Adaptive Management Plan
Date: Friday, April 03, 2009 1:07:41 PM
Attachments: DEIS Appendix D Monitoring and Adaptive Management Plan.pdf

Some of you have asked for our proposed Monitoring and Adaptive Management Plan. I've attached what was in the 90% version of the DEIS that we provided last summer. We have not yet updated these documents, but we will as part of our preparation of the full DEIS. If you have specific changes you would like us to consider, please let me know.

Bill Bailey

From: Bailey, William G SAM@SAS
To: "meiburg.stan@epa.gov"; "giattina.jim@epa.gov"; "mueller.heinz@epa.gov"; Semonite, Todd T RG SAD; Kertis, Edward COL SAS; "roy.crabtree@noaa.gov"; "david.bernhardt@noaa.gov"; "sam.hamilton@fws.gov"; "Jeff.Weller@fws.gov"; "sgreen@gaports.com"; "steve@sgreenproperties.com"
Cc: "jack.arnold@fws.gov"; Flakes, Curtis M SAM; Oddi, Peter A SAS; Dixon, Lester S SAD; Paynes, Wilbert V SAD; Small, Daniel L SAD; "hmooren@gaports.com"; Okane, Jason D SAS; "mmrattngly@comcast.net"
Subject: Savannah Harbor Expansion Project - 30 April Executive Steering Committee Meeting
Date: Monday, July 06, 2009 9:53:00 AM
Attachments: Sav Harbor Expansion EMG 30 Apr Agenda.doc
 EXPAN Exec Steering Committee MFR 30Apr09 (Rev 273km).doc
 SHEP Issue Tracking 30April ESC mta.xls

I am providing the Corps' final MFR of the 30 April meeting. It includes revisions that we made in response to your review of the Draft MFR.

We have highlighted portions of the MFR that documented particularly important discussions and where the Corps or others committed to a future action.

I have also attached a spreadsheet that shows the issues that were raised, the responses taken, and whether the agency considers the issue closed. We would like your staff's assistance in keeping this spreadsheet current. We highlighted portions of the spreadsheet in Yellow to show areas where some response is still needed. Other portions will be highlighted in another color (Blue) to show when an issue has been satisfactorily resolved. If we have provided a response that addresses your concern, we need your staff to let us know that the issue is resolved. Hopefully, the staffs can keep this file up to date. Then we would then be able to use this tool at the ESC meetings to track progress. We are expanding this spreadsheet to include all issues that you and your staff raise concerning this project. We will coordinate that larger spreadsheet with your technical staffs.

The next meeting of the Executive Steering Committee is scheduled for 20 August in Savannah. GPA has agreed to provide a tour of their terminals prior to the meeting, as well as provide a conference room for the ESC to meet. The following is a preliminary schedule for that day:

0900	Meet at GPA to tour terminals
0930-1030	Tour
1030-1100	Back to GPA office
1100-1500	ESC Meeting (Includes working lunch)
1500-1530	Wrap-up
1530	Adjourn

Directions to GPA's Administration Building can be found at the following website:
<http://www.gaports.com/Facilities/GardenCityTerminal/AddressDrivingInstructions/tabid/258/Default.aspx>

Bill Bailey

>
 >From: Rees, Shirley M SAD
 >Sent: Friday, April 24, 2009 8:27 AM
 >To: 'meiburg.stan@epa.gov'; Kertis, Edward COL SAS; 'roy.crabtree@noaa.gov';
 'sam.hamilton@fws.gov'; 'mmrattngly@comcast.net'; 'sgreen@gaports.com';
 'steve@sgreenproperties.com'
 >Cc: 'jack.arnold@fws.gov'; 'giattina.jim@epa.gov'; 'mueller.heinz@epa.gov'; Flakes, Curtis M SAM;
 Oddi, Peter A SAS; Bailey, William G SAM@SAS; Dixon, Lester S SAD; Paynes, Wilbert V SAD; Small,
 Daniel L SAD; 'hmooren@gaports.com'; 'david.bernhardt@noaa.gov'; Okane, Jason D SAS
 >Subject: SHEP Executive Steering Committee Meeting - 30 April
 >
 > << File: Sav Harbor Expansion EMG 30 Apr Agenda.doc >> << File: SH Expansion Exec Steering
 Com MFR 27 Feb 09.doc >>

>
>Gentlemen,
>
>I am sending this on behalf of BG Joseph Schroedel as a reminder of the SHEP Executive Steering Committee Meeting to be held in Atlanta, SAD Headquarters, 10th floor Executive Conference Room from 1300 - 1600. I have attached the agenda for the meeting on 30 April and the minutes from the last meeting, held 17 Feb.
>
>The incoming SAD Commander, BG Todd T. Semonite will also attend this meeting.
>
>The POC for the meeting is Mr. Daniel Small, 404-562-5224 or daniel.l.small@usace.army.mil
>
>Thanks for your time and attention.
>
>v/r
>Shirley
>
>Shirley M. Rees
>Executive Assistant
>South Atlantic Division
>US Army Corps of Engineers
>404-562-5005
>
>

CESAM-PD-E

4 December 2008

Revised 11 December 2008

MEMORANDUM FOR RECORD: Savannah Harbor Expansion Project;
Interagency Coordination Meetings

1. The Corps called an interagency coordination meeting on 1 December in Charleston, SC. EPA could not attend that meeting. The District met with them and GA DNR-EPD on Wednesday, 3 December, in Atlanta. The attendees for both meetings are shown at the end of this MFR.
2. The meetings were held as both a continuation of our ongoing coordination on this project and as preparation for a meeting of the Executive Management Group in mid-December.
3. I began with information about the upcoming EMG meeting. The details are still being determined, so I stated that I would provide them with a copy of the meeting goals when they were finalized and distributed.
4. We then began by going through the 12 recommendations included in the November 2008 Draft Fish and Wildlife Coordination Act Report (FWCAR). The first recommendation is *"In order to reduce impacts to fish and wildlife resources, limit any channel deepening project to the 44 foot or 45 foot alternative."* The agencies stated that they believe that the various alternatives are not environmentally equivalent. They believe that since the impacts increase with project depth, the alternative with the least amount of deepening had to be the best for the environment. I stated that with the mitigation included, the Corps considered the alternatives to be environmentally equivalent. I stated that unless an agency felt that the mitigation for a particular depth was unacceptable, the Corps would consider the alternative to be acceptable from an environmental perspective. We agreed that the Coordination Act Report should identify the plan(s) which would result in the least impacts to the environment. The ultimate decision on the best plan would include consideration of other factors, such as economic impacts.
5. Recommendation #2 is *"Initiate repair of the Savannah NWR freshwater supply system no later than initiation of harbor construction and complete repair in a timely manner (within two years of start."* I stated that the Corps was still evaluating this issue, but that guidance from HQUSACE in the Planning Guidance Memorandum (PGM) from the August 2008 Alternative Formulation Briefing (AFB) was that we should include this as a project feature if it had not already been accomplished or underway using other Corps funds (pages 39/40).

6. Recommendation #3 is *“Prior to or concurrent with harbor deepening, implement flow and channel modification mitigation as described in the Corps plan, with the exception of the “broad berm” in Back River. Continue coordination with regulatory agencies to determine potential impacts of the berm and evaluate alternatives to the berm.”* We clarified that there is both a technical and a policy issue. The technical concerns are with water quality (low dissolved oxygen) and off-site sedimentation (fines moving offsite during construction and settling upstream in Back River). The Corps reiterated that the placement of new work sediments within the basin was not as an alternate disposal site, but was intended to speed the filling of the Sediment Basin so that it would provide its mitigation function of blocking upstream movement of saltwater up Back River as soon as possible. I stated that our cost estimates included construction of the sill using sediments from the confined upland sediment containment areas, not from the bottom of the river. SC DNR asked that we clarify in the DEIS the purpose of the sill – to limit upstream movement of salinity and encourage subsequent natural sedimentation within the basin. SC has a policy against open-water disposal of sediments. All agencies recommended we provide more explanation of the construction technique. The agencies recommended we use as coarse of sediments as possible. The DEIS presently contains an acceptability criteria of 75% sands. I stated the Corps would examine if we could increase that threshold to 85% without greatly increasing costs. I stated that the Corps may want to use a small hydraulic dredge to construct some of the sill using sediments that become available when we remove the abutments of the Tidegate. The agencies thought that would be acceptable, as the sediment should very sandy. The agencies asked about altering the construction sequencing, with the blocking of Rifle Cut occurring very early in the process. The belief is that this blockage may reduce flow volumes up Back River, thereby reducing the possibility of distributing fines up that river. The agencies questioned whether the sediment that accumulates in the Sediment Basin is suspended in the water column or is transported along the bottom. Their concern is whether the sill would increase or decrease the subsequent filling rate of the basin. They asked that the Corps’ hydraulic engineers make a statement of their belief about whether the sill would increase or decrease the subsequent filling rate of the basin or increase the shoaling rate in Back River upstream of the basin. Note – the basin is now 4-feet above the adjacent navigation channel (it was not deepened during the last harbor deepening), so it is unlikely that it receives sediments that move along the bottom of the river.

7. Recommendation #4 is *“Fully fund Georgia DNR to produce striped bass for mitigation stocking as described in this report”*. GA DNR-WRD stated that it is conducting its Striped bass stocking to counter the effects of previous harbor deepening projects. The Striped bass population has increased over the years, primarily as a result of their stocking, but the population is not yet self-sustaining. WRD confirmed that it intends to continue the stocking program to ensure a population of Striped bass continues to exist in this estuary. Because it is stocking as a result of prior actions by the Corps, WRD requests that the Federal Navigation Project fund all the costs of that stocking program. I reiterated the Corps Headquarters’ early guidance that the SH Expansion Project could not be used as a vehicle to mitigate for impacts from previous harbor improvement projects. Therefore, I did not believe the Corps would concur in WRD’s request.

The DEIS proposed to pay a portion of WRD's Striped bass stocking program based on the percentage of habitat that the proposed project would impact. GA DNR-WRD is proposing a slightly different approach to calculating the impact numbers than was included in the DEIS. The different approach is explained in the Draft FWCA Report. The Corps will examine the different approach proposed by WRD for calculating the level of impact. If the Corps finds that WRD's approach is technically sound, it would include it in the DEIS.

8. Recommendation #5 is "*Initiate land acquisition, in the amount recommended by the Service in this report (Table 17), no later than initiation of harbor construction and complete acquisition in a timely manner (within two years of start).*" I stated that the Corps concurred in starting the land acquisition early in the construction process. The Draft FWCA Report indicates that the DEIS may have incorrectly calculated the number of acres needed to be acquired. I stated that I my initial review agreed with the procedure included in the FWCA Report, but that I needed to examine documents in my files before I could fully agree with the recommended changes. I need to confirm that the wetland acreages used in the FWCA Report are based in the latest version of the impact numbers. If my examination confirms the numbers in the FWCA Report, we will revise the DEIS.

I highlighted on item in the SOP calculations to the agencies. The Draft FWCA Report recommends using the maximum value for the existing hydrology of the tidal freshwater marshes. The DEIS had used a lower value to reflect the existence of the man-made rice canals. The agencies confirmed that they believe that the rice canals should not be viewed as an unnatural alteration of the hydrology of the area. They believe that the canals have become naturalized after being in place for more than 150 years; that they do not hinder tidal flows to and through those marshes; and that the canals provide the full ecological functional of a natural creek.

9. Recommendation #6 is "*Provide in-kind restoration of estuarine emergent wetlands within the lower Savannah River Basin system for the 7.2 acres of wetlands that would be excavated because of channel or turning basin widening.*" The Corps agrees to provide in-kind mitigation for the direct losses of saltmarsh. The Corps has attempted to identify a site to restore or create saltmarsh. It first considered saltmarsh along the lower portion of the channel, but concluded that the narrow river would make such a measure would be very expensive on a per acre basis. The Corps then sought recommendations from the agencies. GA DNR-CRD suggested a couple of sites that had previously been identified along the Intracoastal Waterway (grading down old disposal mounds) and in the Savannah area (removing small dams that now create ponds in residential areas). The USFWS suggested options around the ends of the Tidegate. The Service also identified grading down a previous disposal site (Area 1S). Area 1S is quite close to the impact area and appears to contain sufficient size to allow 40-50 acres of marsh to be restored without needing to remove the large trees that exist close to the Savannah River side of the site. The Corps will pursue use of this site. It will have its geotechnical engineers provide a statement on the type of sediment expected to exist on the site. If the sediments are primary sand, the USFWS is open to their being deposited in CDF 1N, where the

material could be reused. The agencies also stated that if the sediments were predominantly sand, they may be suitable for creating the sill at the mouth of the Sediment Basin.

10. Recommendation #7 is *“Cap all new work sediment containing elevated cadmium concentrations (identified as “high” and “low” in the risk assessment) with clean material.”* The Corps continues to believe that covering all the cadmium-enriched sediments is unnecessary. It has prepared responses to the USFWS comments and will be providing that to the Service soon. SC DNR expressed support for the Service’s position and will be provided a copy of the Corps’ responses.

11. Recommendation #8 is *“Dispose of all suitable (meeting Georgia DNR criteria) new work sediments in the intertidal or near shore area off Tybee Island.”* This comment basically supports the new work placement plan proposed in the DEIS. The DEIS recommends placing suitable new work sediments within the nearshore area. Because of guidance received at the AFB concerning CZM compliance, the DEIS will be revised to remove placement of some O&M sediments in the nearshore area. Those sediments would now continue to be deposited in the ODMDS.

12. Recommendation #9 is *“Install a fish passage facility at New Savannah Bluff Lock and Dam or remove the dam to restore the river. Continue coordination with resource agencies to optimize design of any fish passage facility.”* This comment basically supports the mitigation proposed in the DEIS for Shortnose sturgeon. The focus of the design of the fish passage structure should be SNS. The agencies agreed that a structure that successfully passes SNS would also allow passage of other anadromous species. The Corps agreed to coordinate further with the agencies on the design of the structure. That coordination would occur if/when the project is approved and would concentrate on whether the state-of-the-art has improved since the bypass was originally designed so that it should be adjusted to improve its ability to pass sturgeon.

13. Recommendation #10 is *“Expand the proposed adaptive management plan to include potential modifications of the oxygen injection system and adequate contingency funding for the modifications.”* The Corps agrees to revise the adaptive management plan to include funds to modify oxygen injection systems. We will include funds at the same rate as for the other mitigation features – 10% of initial construction costs.

The agencies expressed continued concern about the ability of the oxygen injection systems to improve D.O. levels throughout the harbor. They questioned whether the Corps would continue to provide funds to operate the systems if O&M funding levels are insufficient for both dredging and mitigation needs. I stated that we recognized that failing to operate the systems would result in the project being out-of-compliance with its Section 401 water quality certifications. The Corps agreed to check with GPA and request that their consultants complete the update to their report on the 2007 D.O. Demonstration Project. NOAA-Fisheries stated that review of that report by a National Academy (the Marine Board) may be appropriate because this is such a critical

component of the mitigation plan and a fairly large investment (\$50 million capital cost). The Corps stated that it intended to have ERDC review the report and agreed to ask ERDC if review by a National Academy would more appropriate.

14. Recommendation #11 is *“Investigate the feasibility of constructing a public boat ramp, dock, and parking area on the South Carolina side of Back River at the tide gate site to compensate for this lost recreational use.”* Since the AFB, the Corps has investigated the feasibility of constructing a boat ramp. It has been unable to identify lands which are suitable for placement of a ramp. A site along US Highway 17 which is available does not provide sufficient depths at all tides. Lands which appear to be suitable are not readily available. Other sites would require filling of wetlands, which the agencies say they do not want. The Corps agreed to again ask about use of the Tidegate site. The agencies stated that Jasper County would likely be willing to take ownership of the underlying land, which had been a concern of the present landowner – the GA DOT. Security of the adjacent confined sediment placement sites had been a concern previously identified by the Corps staff. We will re-examine that issue.

The agencies stated that there may be a possibility of working with GA DOT on a nearby project – the replacement of the bridge over Back River. During the meeting, the USFWS contacted GA DOT and found that the new bridge would not provide suitable area underneath it for use as a ramp, that the project would use the existing alignment for 2 of the new lanes, and that the project had been put on hold due to budget concerns. Due to these issues, the Corps will not pursue the potential of combining these projects.

15. Recommendation #12 is *“Implement the proposed comprehensive monitoring program to document project impacts. Continue coordination with resource agencies to develop a data analysis and information delivery plan as part of the monitoring program.”* This comment basically supports the proposed monitoring plan and recommends further coordination to refine it further. The Corps agreed to continue to work with the agencies on the monitoring and adaptive management plan. It recognized that the plan is not perfect and welcomed suggestions on specific wording that would clarify or refine the plan.

The agencies suggested that more detail be included in the plan. It requested the plan address how the data would be used. (That is already addressed to some degree in the plan.) The success criteria should be as clear as possible. NOAA-Fisheries suggested the agencies hold meetings once or twice a year to review the monitoring results.

The agencies questioned how we would evaluate the effectiveness of the mitigation features. The Corps stated that the data would be compared to what the models predict would occur under the conditions that are experienced (river flows, temperature, etc). The variation of the models from the data would be viewed in light of the acceptability criteria used to assess the initial acceptability of the model (Federal Expectations Document).

16. We then reviewed the guidance provided by the Corps' Headquarters at the AFB or in the subsequent PGM. The Corps stated that it would be deleting the additional 50 acres of wetland mitigation proposed in the DEIS to address inaccuracies in the impact analysis procedures. Since the inaccuracy is both + and -, Headquarters did not believe it was appropriate to only add additional acres to the mitigation requirement.

The Corps will be removing the additional value assigned to wetlands that would be lost just because they occurred on the National Wildlife Refuge. The agencies agreed that following the SOP would be sufficient.

The Headquarters' guidance is that only benefits to the O&M dredging program could be included in assessing the viability of the advance maintenance features on the entrance channel. Impacts to other projects or resources are not to be included. The District stated that with those criteria, that advance maintenance feature would not be economically justified and would be deleted from the DEIS.

In response to Headquarters' guidance concerning CZM compliance, the Corps will be removing nearshore placement of some O&M sediments. The District was not able to identify any non-Federal sponsor willing to pay the incremental costs of such placement. Nearshore placement of new work sediments would remain as proposed in the 90% version of the DEIS. The DEIS will say that all O&M sediments would be deposited in the ODMDS after the harbor is deepened, just as they are now.

Corps Headquarters had concluded that fish passage at New Savannah Bluff Lock and Dam would be an acceptable mitigation feature for this project. They resolved their previous policy concerns about including that action as part of this project.

The Headquarters' guidance is that restoration of the Freshwater Control System should be a part of this project if it is not constructed prior to the Base year by the O&M Project. The Corps is still examining the appropriate funding source for that work, but the Headquarters guidance clarifies that the work will be performed by the Corps if the SH Expansion Project is approved and constructed.

17. We then reviewed the comments provided by the agencies at the AFB.

NOAA-Fisheries stated that it considered as necessary to evaluate project impacts a benthic or sediment survey of the area to which the Shortnose sturgeon would move. This is the area just upstream of where the fish generally reside now. NOAA gave the name of Gary Ray at ERDC as a potential technical source of information for such a survey. The Corps agreed to consult with Mr. Ray.

The Corps said that it was working with NOAA to evaluate whether modifications to the criteria of acceptable SNS habitat are appropriate. The present criteria do not show as "Acceptable" areas where recent studies have found sturgeon to reside. If NOAA and the Corps believe such changes are warranted, we will coordinate with the other agencies that originally developed the criteria to ensure they agree with the changes.

NOAA again requested figures (maps) that show the extent of the D.O. impacts. The Corps had been working on that information and intended to include it in the revised DEIS. The agencies said that if their management would be asked for their position on the acceptability of the mitigation prior to release of the DEIS, the staff would need that information prior to release of the document. A sample of D.O. information was emailed to agency staff on 4 December for review.

The Corps asked about the purpose of the nearshore monitoring if the nearshore deposition was revised to being only a one-time placement. GA DNR-CRD stated that their initial request was based on the design in the 90% version of the DEIS which called for nearshore placement of O&M sediments. CRD continues to support the use of the MLW200 and MLW500 placement sites, as well as the other nearshore placement sites. CRD believes that annual monitoring would still be appropriate for 2 years to provide information on the direction and rate of migration of the deposited sediments. They noted that some of this monitoring may already be conducted as part of the Tybee Island Shore Protection Project.

18. At the 3 December meeting in Atlanta, EPA stated that they had not participated in preparation of the Draft Fish and Wildlife Coordination Act Report or reviewed its recommendations. I agreed to provide them a copy of the document. GA DNR-EPD could not remember reviewing the draft document and also requested a copy.

At the AFB, EPA had suggested the use of a mitigation bank to provide the saltmarsh mitigation needs. They reiterated that suggestion at the interagency meeting and noted that the 2007 WRDA included language that states that the Corps is to first consider the use of mitigation banks to meet the mitigation needs of civil works projects. The District agreed to review the Corps guidance on that portion of the WRDA. The guidance states that the Corps civil works projects should consider mitigation banks first as the means of meeting a mitigation commitment. The USFWS believes that because of the cumulative losses within the estuary over time, this mitigation should be performed within the basin, as is the other mitigation. The one operating saltmarsh bank within the Savannah River basin presently does not have any credits available for sale. The timing and amount of the availability of additional credits are uncertain. The Corps believes that it can successfully perform an on-site saltmarsh restoration project of a size that would provide substantial ecological benefits to the estuary, and intends to pursue the restoration described above in section 9.

EPA raised the possibility of a link between harbor deepening and the berth deepening for which GPA is presently seeking approval through the Regulatory Program. EPA questioned whether the berth deepening was a stand-alone project that possesses independent utility, or just the first step of an overall harbor deepening. The District stated that the economic revisions that the Corps was performing would only consider the berths at their present depth and would not include any additional traffic volume that a deeper berth may produce.

In comments provided at the AFB, EPA had suggested adding a magnitude factor to the wetland SOP procedures. The SOP used in SC contains such an additional factor for large construction projects. GA DNR-EPD had also suggested adding a magnitude factor to the Georgia SOP procedures. The District raised this issue for discussion at the interagency meeting. EPA acknowledged that the majority of the wetlands that would be impacted by the project would result in a conversion of one wetland type to another – freshwater to brackish or brackish to saltmarsh. They stated that they were uncertain what most functional assessments would show for such an action, as the same wetland functions would exist in both the Before and After conditions. One type of marsh would be higher in some functions and lower in others, but the overall ecological difference may be difficult to determine. It would likely result in a tradeoff between one wetland function and another, which would be a value judgment. Without a strong belief that a magnitude factor is technically supportable and likely to be helpful in clearly identifying the difference between the Before and After conditions, the District will not pursue this issue further.

19. The District agreed to prepare a record of the meetings and distribute it to the participants for review. It is hoped that the record would be useful to the agency staff in briefing their management for the 16 December meeting of the Executive Management Group.

A handwritten signature in cursive script that reads "William G. Bailey". The ink is dark and the signature is fluid, with a large, sweeping 'B' and 'A'.

William Bailey
Physical Scientist

SAVANNAH HARBOR EXPANSION PROJECT

INTERAGENCY MEETING

ATTENDEES

Monday, 1 December, Charleston, SC

USFWS

Ed EuDaly	843-727-4707, X227
Bill Wikoff	912-265-9336
Jane Griess	912-652-4415
Mark Caldwell	843-727-4707, X215

NOAA Fisheries

Pace Wilber	843-953-7200
Kay Davy	843-953-7202
Stephanie Bolden	727-824-5312

SC DNR

Priscilla Wendt	843-953-9305
-----------------	--------------

SC DHEC

Chris Beckham	803-898-4261
---------------	--------------

GA DNR-WRD

Tim Barrett	912-727-2112
-------------	--------------

GA DNR-CRD

Kelie Moore	912-264-7218
-------------	--------------

US Army Corps of Engineers

William Bailey	912-652-5781
Jason O'Kane	912-652-5276
Paul Bradley	251-694-4101 (by phone)

Wednesday, 3 December, Atlanta, GAEPA

Heinz Mueller	4-4-562-9611
Ted Bisterfeld	404-562-9621
Bob Lord	404-562-9408
Jim Greenfield	404-562-9238 (by phone)

GA DNR-EPD

Keith Parsons	404-675-1631
---------------	--------------

US Army Corps of Engineers

William Bailey	912-652-5781
----------------	--------------

From: [Flakes, Curtis M SAM](#)
To: [Garrett, Thomas A SAS](#); [Bailey, William G SAM@SAS](#); [O'Kane, Jason D SAS](#); [Parrott, Daniel I SAS](#); [Bradley, Kenneth P SAM](#); [Moseby, Bernard E SAM](#); [Boatman, Todd H](#); [giattina.tim@epa.gov](#); [cox.william@epa.gov](#); [greenfield.tim@epa.gov](#); [mueller.heinz@epa.gov](#); [histerfield.ted@epa.gov](#); [miles.croam@noaa.gov](#); [kay.davy@noaa.gov](#); [pace.wilbert@noaa.gov](#); [hmcopere@gaports.com](#); [dschaller@gaports.com](#)
Subject: FW: Savannah Harbor Expansion Executive Management Group, Steering Group Meeting
Date: Wednesday, December 10, 2008 6:52:20 PM
Attachments: SHEP EMG Charter.doc

All

This charter was emailed to the EMG members or their designees today for discussion on the 16th Dec.. Please share as needed.

Curtis

-----Original Message-----

From: Flakes, Curtis M SAM
Sent: Wednesday, December 10, 2008 5:36 PM
To: Kertis, Edward COL SAS; Schroedel, Joseph BG SAD; [jack_arnold@fws.gov](#); [christy.don@epa.gov](#); [roy.crabtree@noaa.gov](#); [sgreen@gaports.com](#); 'Cindy Graves'
Cc: Dixon, Lester S SAD; Oddi, Peter A SAS; Paynes, Wilbert V SAD
Subject: Savannah Harbor Expansion Executive Management Group, Steering Group Meeting

Dear EMG Member:

Enclosed is the proposed charter for the Savannah Harbor Expansion Executive Management - Steering Group (EMG). This will be discussed at the meeting on 16 December.

Thanks!

Curtis

-----Original Message-----

From: Flakes, Curtis M SAM
Sent: Monday, December 01, 2008 5:08 PM
To: Kertis, Edward COL SAS; Schroedel, Joseph BG SAD; [jack_arnold@fws.gov](#); [christy.don@epa.gov](#); [roy.crabtree@noaa.gov](#); [sgreen@gaports.com](#)
Cc: Dixon, Lester S SAD; Oddi, Peter A SAS; Paynes, Wilbert V SAD
Subject: Savannah Harbor Expansion Executive Management Group, Steering Group Meeting

Dear EMG Member:

Please find enclosed the proposed agenda for the next Executive Management - Steering Group (EMG) meeting scheduled for December 16, 2008 in Atlanta, Georgia. The meeting will be held at our South Atlantic Division Headquarters, Sam Nunn Federal Center, 10th floor Mid-rise Building, Main Conference Room located at 60 Forsyth Street, SW. Additional read-head information will be sent to you prior to the meeting.

If you have any questions concerning the meeting, please call me at (251) 690-2777.

Curtis M. Flakes
 Chief, Planning and Environmental Division
 (251) 690-2777 phone
 (251) 690-2727 fax
Curtis.m.flakes@usace.army.mil

Recommended Overarching Goal of Executive Management Group (EMG)

To facilitate interagency concurrence on the analysis conducted on the proposed Savannah Harbor Expansion Project and to facilitate timely decisions on the feasibility of the proposed project.

Charter of the Executive Management Group (EMG)

1. Provide senior executive-level leadership and guidance to Federal interagency staffs working on the SHEP.
2. Serve as a forum to raise, discuss, and resolve major issues.
3. Participate in each meeting and represent respective agency's views.
4. Remain informed on respective agencies' position on issues within the study.
5. Communicate openly, clearly, and rapidly all issues or concerns that could render any recommended plan unacceptable.
6. Jointly develop solutions to problems and issues that could adversely impact the EMG's overarching goal.
7. Provide necessary resources for timely and complete participation issue resolution.

CESAS-PM-C

18 December 2008
Revised 16 February 2009

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project; Executive Management Group (EMG) Meeting

1. The Corps held an interagency coordination meeting on 16 December 2008, at the US Army Corps of Engineers (USACE) South Atlantic Division (SAD) office in Atlanta, Georgia. Attendees included Brigadier Gen. Schroedel (USACE, SAD), Col. Kertis (USACE, Savannah District (USACE, SAS)), Mr. Don Christy (US EPA), Mr. Jack Arnold (USFWS), Mr. Buck Sutter (NOAA Fisheries), and Mr. Steve Green, Mr. David Schaller, Ms. Hope Moore (Georgia Ports Authority). Former U.S. Senator Mack Mattingly, who is working on GPA's behalf, attended by phone. A sign in sheet identifying all attendees for this meeting is attached at the end of this MFR.
2. The meeting was held as both a continuation of the ongoing coordination on the Savannah Harbor Expansion Project General Reevaluation Report and Tier II EIS and to assure effective and efficient communication between resource agency executive managers in anticipation of the need for future decisions.
3. A meeting notebook was provided that contained an agenda, group charter, meeting objectives, project status, project schedule and other supporting materials. This notebook is for reference in both this meeting and future EMG meetings.
4. The meeting began with an introductions and a welcome from Gen. Schroedel and Col. Kertis. Col Kertis stated that the purpose of the meeting was to update the agency executive managers on the project status and issues. This "baseline" of knowledge is to prepare the executives for future meetings of this group, including one in mid-February 2009. The group reviewed and approved the meeting goals and charter.
5. Mr. Steve Green asked how would our new January 2009 Presidential administration affect agency representation within this group. He also stated that one of the purposes of this group was to provide continuity of people as each agency changes. Mr. Christy (EPA) was unsure how the administration change would affect their positions. The representatives of the USFWS and NOAA Fisheries indicated that their agencies would not be affected by a new administration.
6. A PowerPoint presentation reviewing the project purpose and background was given by Mr. Alan Garrett (USACE, SAS). Topics include the Panama Canal expansion in 2014/2015, history of project authorization and development, studies completed, and funds expended. Mr. Bill Bailey (USACE, SAM) then presented a summary of interagency coordination that had occurred to date, the methodology for the development of the proposed mitigation plan, and the Corps' understanding of the current status of the environmental issues. His presentation ended with a

list of the remaining environmental issues. A table near the end of this document summarizes the Corps' understanding of those issues. Mr. Jason O'Kane (USACE, SAS) then presented a look ahead at major future milestones that would require action on the part of the resource agencies. During these presentations, several points were discussed by the various participants.

7. Mr. David Schaller commented during the presentation on the numerous Stakeholders Evaluation Group (SEG) meetings which have been held since this phase of the project began in 1999. He stated that in addition to federal agency involvement, there has been numerous meetings with Non-Governmental Organization such as the Georgia Conservancy, the Sierra Club, the Center for a Sustainable Coast, as well as local and state government such as the City of Tybee, City of Savannah, Georgia Department of Natural Resources, South Carolina DHEC, and myriad members of the general public. He characterized the Stakeholders Evaluation Group, managed by the Georgia Ports Authority, as an open public and transparent process that occurs on a frequent basis. It was also stated that the next presentation to the SEG in February 2009 will include a presentation on the need for additional economics work.

8. Gen. Schroedel asked how adaptive management could be used to implement the proposed mitigation. Mr. Bill Bailey stated that we would implement the mitigation necessary to offset our best assessment of adverse impacts. Adaptive management is the process by which changes would be made should monitoring indicate mitigation to be inadequate or to need modification. The environment will benefit if we over-mitigate.

9. Mr. Bill Bailey mentioned that the project included a monitoring and adaptive management plan. The current cost of the proposed mitigation is approximately \$170 million which is nearly a third of the total project construction cost. The overall mitigation includes monitoring of project impacts, with regular agency meetings to evaluate the monitoring data collected against what would have occurred without the project. The agencies would review the monitoring data and decide if adjustments to the mitigation features are required. The adaptive management plan includes up-front budgeting that allows the modifications to be implemented if needed. The Corps is willing to refine the monitoring and adaptive management plan by incorporating suggested specific agency revisions as we move forward. The USFWS commented that the important thing was the commitment to adaptive management and that the details could be worked out as planning continues.

10. Sen. Mack Mattingly asked why the adverse impact to South Carolina recreational boating/fishing access was a Federal issue. Col. Kertis responded that when a state registered such a concern on an impact from a Federal project, that it must be considered and that he had received several comments from the public with concern over the issue.

11. EPA commented that they understood the concern over the construction of the Back River sill, but requested a more thorough and complete explanation on the construction method. Mr. Bill Bailey responded that we were working to develop additional information and that it would be provided to EPA.

12. Col. Kertis mentioned that Speece Cone Oxygenation technology/effectiveness was well documented and that these units are in use around the world. He asked that any criticism of this mitigation technique be fair and if there are comments regarding the system's unacceptability, that the agencies' be prepared to defend their positions from a technical standpoint. NOAA asked to be provided any locations that are similar in character to Savannah Harbor where Speece Cones have been used, and suggested that the National Academy of Science provide a review of the test results. The District stated that it intended to have the Corps' Engineering Research and Development Center (ERDC) review the test results and seek ERDC's opinion on whether review by a National Academy would be more appropriate. Ms. Hope Moorer (GPA) commented that the supplemental report on the additional modeling and interpretation of the Speece Cone testing data was expected in January 2009. The additional analysis has been prepared with the input and assistance of Mr. Paul Conrads, USGS, who is advising USFWS on modeling and water quality issues.

13. Col. Kertis asked if we investigated oxygen injection further upstream. Mr. Bill Bailey commented that we had and that EPA had stated that oxygen injection further upstream would not be as effective.

14. The USFWS commented that the USFWS Coordination Act report recommends the Corps mitigate in-kind for wetland losses resulting from the channel widening efforts. According to the Refuge Improvement Act (not included in the FWCA Report) is that if the widening impacts/destroys wetlands currently on and managed by the Refuges System - a compatibility determination would have to be completed before that act could be authorized. As this activity is inappropriate on National Wildlife Refuges, a land exchange is the only way that the Service can allow this activity to move forward. Compatibility is only required when the Service authorizes a use or activity that supports the purpose of the refuge, in this case Savannah, and project mitigation cannot be considered when making that determination. The harbor deepening does not support refuge purposes therefore leaving a land exchange as the Service's only option to facilitate this project. Where uses or activities associated with the project support refuge purposes on refuge lands or waters and will be authorized, a compatibility determination will be prepared. Mr. Bill Bailey responded that he would contact the Refuge personnel to clarify this issue and provide needed information. The USFWS added that this would require additional work on their part but they would start it as necessary.

15. Mr. Bill Bailey presented that we are seeking a way to repair the Freshwater Control System constructed as mitigation for the 38-foot Harbor Deepening, however, the source of funding is problematic. Ms. Hope Moorer announced that the GPA had approached the Governor's office with a request to include restoration of the Freshwater Control System in the Federal stimulus package as a means of accomplishing the work expeditiously. Mr. Les Dixon offered to facilitate a separate meeting with the USFWS to resolve the freshwater control structure issue. It

was concluded that the repairs will be included in the SH Expansion Project, if not addressed beforehand.

16. NOAA Fisheries has requested that additional post-construction monitoring be conducted. The Corps stated that it needed a defined period of time to be able to calculate and include monitoring costs. Ms. Hope Moorer (GPA) asked if there was a standard monitoring period for similar Civil Works projects. Mr. Bill Bailey responded that 5 years was the maximum allowable up a few years ago. The Corps believes that 5 years is reasonable for this project.

17. One of the recommendations in the November Draft Fish and Wildlife Coordination Act Report is to deepen to only 44 or 45-feet to lessen environmental impacts. The Service stated that they recommend limiting the deepening to -45 feet because that alternative minimizes the impacts to the environment with a higher level of certainty and confidence. The level of impacts and other uncertainty increases with greater depths. All of the other concerns would apply to all alternatives. Senator Mattingly asked the USFWS about the mitigation proposed for the various depth alternatives, especially the -48 foot project. Mr. Jack Arnold (USFWS) stated that the Service was cooperating with the Corps to develop mitigation plans for the alternatives depths that would make each plan acceptable to their agency and that their position for each depth is contained in the November Draft Fish and Wildlife Coordination Act Report.

18. Col. Kertis explained the importance of a thorough and well documented economic analysis.

19. Mr. Les Dixon (USACE, SAD) commented that ideally, all four agencies should be in support of whatever is recommended in the District Commanders' report submitted to HQUSACE for review and approval in January 2010. The other important date to keep in mind is when the report is sent out for Public Review – presently scheduled to be August 2009.

20. Mr. Steve Green (GPA) commented that a year delay seemed extraordinarily long given that we have completed the lion's share of the technical work and had already undergone numerous reviews as required by the Corps' planning process. He stated that the economics of the entire region will be significantly impacted if we further postpone this project. Gen. Schroedel (USACE, SAD) expressed similar concern and asked that the schedule be reviewed and reduced wherever possible prior to the next meeting of this group.

21. The USFWS commented, in summary, that impacts should be mitigated as effectively as possible after all avoidance and minimization has taken place. Water quality, project uncertainties, the dissolved oxygen system and the Freshwater Control System are their primary concerns. Mr. Arnold stated that a thorough adaptive management plan was absolutely essential. Colonel Kertis agreed and suggested that we have experts from the University of Georgia Ecology Lab participate in the actual monitoring phase. Mr. Arnold stated that the Freshwater Control System needed to be repaired soon, since they have obligations to provide freshwater to downstream private landowners.

22. Mr. Don Christy (EPA) commented, in summary, that impacts to air quality, wetlands, TDMLs, and the project's overall effects in a large sensitive system as the Savannah River Basin are their concerns. The EPA needs additional information on the "new" ship traffic that would occur if the harbor is deepened, since they would impact air quality. They are also skeptical of the Speece Cones effectiveness and the project's overall impacts to a range of species. They are advocates of "avoidance mitigation." In addition, any implications of the proposed Port of Jasper concerns them as well. The GPA commented that the Jasper Port was very hypothetical at this point and that the SHEP project should not be penalized for the existence of an idea. Mr. Christy asked specifically that Air Quality and Jasper Port issues be placed on the next EMG agenda.

23. GPA commented on their recent application to deepen four container berths in the harbor in advance of the Expansion Project. They explained that this was necessary to keep shipping lines from going elsewhere and that it was standard industry practice. There were no additional comments.

24. In closing, topics for the next mid-February 2009 meeting of this group in Savannah include air quality, the Port of Jasper, frequency of additional meetings, continuity of the group and a pre-meeting informal get together. The next meeting will also include a tour of the GPA facility along with maps of pertinent harbor features. The GPA's existing command briefing and operational overview of port facilities will also be presented. An April meeting was discussed to review the results of the economic analysis.

25. After the meeting, NOAA provided written comments which are attached.

26. The District agreed to prepare a record of the meetings and distribute it to the participants for review. The record can be used for agencies to inform their staff of discussions at this meeting and expectations for the next meeting.

JASON O'KANE
Project Manager

Agenda items for future meetings:

- 1) Air quality
- 2) Potential Jasper Terminal
- 3) Frequency of EMG meetings
- 4) GPA Presentation
- 5) Economic Analysis Presentation
- 6) NOAA Fisheries December 08 Position Paper

ENVIRONMENTAL ISSUES

	Issue	Resource Agency Recommendation	Corps Response	Resolution Anticipated
1	Monitoring	Develop a data analysis and information delivery plan as part of the monitoring program	DEIS contains information on proposed data analysis and information delivery. Will continue to coordinate with resource agencies to refine the plan.	Yes
2	Boat Ramp	Constructing a boat ramp on the SC side of Back River	If no sites found that meet all criteria. Could provide funds equivalent to the cost of constructing a ramp or fill saltmarsh	Yes, staff still working issue
3	Adaptive Management	Expand adaptive management plan to include potential modifications of the oxygen injection system and modification contingency funding	Concur. Corps will include in DEIS	Yes
4	NSBL&D Fish Passage	Install a fish passage facility at New Savannah Bluff Lock and Dam of acceptable design	Concur. Corps will coordinate with agencies after project approval for final design review.	Yes
5	Near Shore Disposal	Dispose of suitable new work sediments (meeting Georgia DNR criteria) in the nearshore area off Tybee Island	Concur. This is included in proposed project.	Yes
6	Cadmium Containment	Cup all new work sediment containing elevated cadmium concentrations ("high" vs. "low") with clean material	Corps provided detailed responses to agencies in December.	Yes, staff still working issue
7	Tidal Marsh Impacts	Provide in-kind restoration of estuarine emergent wetlands for 7.2 acres that would be excavated	Concur. Corps is pursuing restoration of a previous sediment disposal site within the harbor.	Yes, staff still working issue
8	Land Acquisition	Initiate land acquisition no later than initiation of harbor construction and complete acquisition within two years	Concur. Expect to acquire the lands within the requested time frame. Acreage yet to be finalized.	Yes
9	Striped Bass Stocking	Fully fund Georgia DNR's striped bass stocking program	Corps HQ stated that this project cannot resolve env issues from previous deepening projects, but only mitigate for the incremental effect of this proposed deepening. Corps will fund stocking equal to level of impacts.	Yes
10	Flow Modifications	Prior to or concurrent with harbor deepening, implement flow/channel modification, continue coordination of	Concur. Corps will include intent of berm and proposed construction technique in DEIS	Yes

		berm impacts and alternatives		
11	Freshwater Supply System	Initiate repair of the Savannah NWR freshwater supply system no later than initiation of harbor construction and complete within two years of start	Concur. Corps will include in the project if not implemented prior to that time.	Yes
12	Depth Selection	In order to reduce impacts, limit channel deepening project to 44 or 45 foot	The Corps will recommend the best depth alternative considering all evaluation factors (environmental, social, and economic).	Not a technical issue
13	Sturgeon Forage Habitat	Survey portion of the river where Shortnose sturgeon would likely move in response to harbor deepening	Concur. will conduct a sediment survey to confirm suitable substrates present. Will provide SOW to agencies for approval prior to conducting the survey.	Yes
14	Sturgeon Habitat Criteria	Modify the criteria for acceptable habitat for Shortnose sturgeon	Still evaluating the effects of modifications to the criteria. Any revision of the criteria would be coordinated with the agencies.	Yes, staff still working issue
15	Dissolved Oxygen Data	Display dissolved oxygen levels more clearly, visually	Data from the feasibility report was provided to agencies for review. Awaiting response as to its acceptability.	Yes
16	Monitoring Period	Longer post-construction monitoring period (undefined length)	Monitoring period must be defined to ensure sufficient costs are included and acquired. Corps believes 5 years is sufficient.	Yes
17	New Work Sediment Monitoring	Monitoring of new work sediments deposited in the nearshore area requested	Agency concurrence that 2 years would be sufficient.	Yes
18	Magnitude Factor	Magnitude factor be added to the procedures described in the Regulatory SOP	Direct impacts to wetlands would be <20 acres. Corps does not believe that adding a magnitude factor is warranted.	Yes
19	Economic Analysis	Economic analysis of the project be technically strong	Corps is updating its economic analysis to strengthen it and allow examination of additional scenarios.	Yes
20	Speece Cones	Uncertainty about the dissolved oxygen systems effectiveness to provide the intended amount of improvement	GPA's consultants are conducting additional analysis of data from the 2007 Demonstration Project. Will produce a supplemental report.	Yes, staff still working issue

			Corps believes the system can provide the beneficial effects intended.	
21	Air Quality	Uncertainty about the evaluation of the project's impacts to air quality	Corps believes existing air quality evaluation is sufficient. Evaluation will be updated to reflect the revised fleet forecast.	Yes

POSITION PAPER PROVIDED BY NOAA FISHERIES SERVICE

**Savannah Harbor Expansion Project (SHEP)
16 December 2008
NOAA Fishers Service, Southeast Regional Office**

NOAA Position:

- At this time, we cannot complete our analysis of the alternatives until the re-examination of the DO injection study is completed. If we do not have reasonable assurance that the DO injection will yield the results predicted, we likely would not support any of the deepening alternatives.
- Assuming sufficient assurance is provided that the DO injection would be effective, we would require a near-real-time monitoring program for DO at locations within the harbor most important to shortnose sturgeon and sufficient capacity within the DO injection system to increase output as needed to avoid impacting shortnose sturgeon habitat.

NOAA Needs:

1. Impact acreage tables (similar to tables 3-5 and 3-6 of the DEIS) that report the net effect to sturgeon and flounder of the mitigation under two scenarios: hydrologic alterations only and hydrologic alterations plus the DO injection.
2. In light of seemingly contradictory results to that reported by Eall et al. (1999) and Collins (2000), further discussion within the technical team of the habitat suitability model used to predict sturgeon habitat under project conditions.
3. Modeling for construction of the lower Middle River sill as a mitigation alternative should be based on the updated parameters for sturgeon habitat (Item 2).
4. Map of project area with cells analyzed in model denoting DO impacts overlaid with placement of Speece Cones.
5. Point source discharges location and assessment of their effect on DO concentrations.
6. For the upriver areas that (based on salinity) are projected to become new foraging habitat for shortnose sturgeon, an assessment of the likelihood of sturgeon prey becoming established in the area. The assessment should include examinations of substrate and colonization rates and monitoring that would indicate if additional corrective actions are necessary.
7. NOAA recommends that COE perform a new pilot study to evaluate the effectiveness of the Speece Cones at elevating DO concentrations during the time of year and at the locations most important to shortnose sturgeon. This new pilot study would be in addition to re-evaluations of results from the 2007 study. NOAA staff will work with the COE to identify the locations and time most important to shortnose sturgeon and the DO parameters that would help NOAA most effectively evaluate the impact to this species.
8. Refinement to the adaptive management program that will gauge impacts from the project in a timely manner and recommend corrective actions should the ecosystem respond negatively and differently than predicted. NOAA offers to lead development of this program.

MEETING ATTENDEES

S.H.E.P.
Dec 16th 2008

Name	Rep	Phone
1. John Christy	USCIB	709/562-8337
Jack Arnold	USFWS	504/677-7311
COL Ed Kerins	USACE	713-613-3416
Back Satter	USACE	727-824-5301
RS Joe Santolucito	USACE	404-562-5006
Bernard Moserby	CORPS/Grandview	251-694-3884
Steve Gannon	USACE/Grandview	912-341-0077
David Schaller	Georgia Ports Authority	912-964-8877
Heidi Moserby	CRA	912-964-3883
MAJ David London	USACE	912-652-5225
Pete O'Dea	USACE/Grandview	912/652-5332
David Farrett	USACE/Grandview	912/652-5219
Les Dixon	USACE	904-562-5200
EDWARD GATWOOD	USACE/SAT	404-562-5226
Joan O'Hare	USACE/SAS	912/652-5270
Paul Gannell	USACE/SAS	912/652-5172
Bill Bolay	USACE/SAS	912/652-5587 3781
Paul Brindley	USACE/SAM	(251) 674-4401
Todd Boatman	USACE/SAM	251-690-3143
22. Curtis Flores	USACE/SAM	251-690-2777
21. David David Small	USACE/SAM	

by phone: Senator Mottlingly

CESAS-PM-C

18 February 2009
Revised 31 March 2009

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project; 17 February 2009 Executive Steering Committee (ESC) Meeting

1. The Corps held the second in a series of interagency Executive Steering Committee meetings on 17 February 2009, at the US Army Corps of Engineers (USACE) South Atlantic Division (SAD) office in Atlanta, Georgia. Attendees included Brigadier Gen. Schroedel (USACE, SAD); Col. Kertis (USACE, Savannah District (USACE, SAS); Stan Meiburg, Mr. Heinz Mueller and Mr. Jim Giattina (US EPA); Mr. Jack Arnold, Mrs. Jane Griess and Mr. Ed Eudaly (USFWS); Mr. David Bernhart (NOAA Fisheries); Steve Cone (USACE Institute for Water Resources); and Mr. Steve Green, Mr. David Schaller, Ms. Hope Moore and Mr. Jamie McCurry (Georgia Ports Authority (GPA)). Former U.S. Senator Mack Mattingly, who is working on GPA's behalf, attended by phone. A sign in sheet identifying all attendees for this meeting is attached at the end of this MFR.
2. The meeting was held as a continuation of the ongoing coordination on the Savannah Harbor Expansion Project General Reevaluation Report and Tier II EIS, to engage the leadership of each agency on all critical issues, insure open communication, and manage expectations.
3. The Corps provided a meeting notebook that contained an agenda, group charter, meeting objectives, project status, project schedule and other supporting materials.
4. The meeting began with an introductions and a welcome from Col. Kertis. Col Kertis stated that the purpose of the meeting was to update the agency executive managers on the project status and issues and facilitate open honest communications, while the technical staffs work to resolve the remaining issues. Col. Kertis asked GPA to brief the group on their container facility and the entire Port of Savannah.
5. David Schaller, GPA Chief Administrative Officer, presented details on the significance of the Port of Savannah and the GPA facilities, strengths of the existing navigation project, and the need for deepening to meet the demands of the shipping industry's move to larger, deeper-draft container vessels, on local, regional and national levels. The group discussed that the Panama Canal will be a major driver for larger container vessels on the East Coast, the resulting need for harbor deepenings, and that Canal expansion was scheduled to be complete in July 2014. Other East Coast ports that have been deepened or are in the process to be deepened were mentioned as including Miami, Jacksonville, New York, and Charleston.
6. Stan Meiburg with EPA asked how a potential terminal in Jasper County, SC, factored into this need. The group discussed the many uncertainties, environmental, engineering and economic challenges for any terminal in Jasper County. The dependency of a new container terminal on Jasper County on a deeper channel was also mentioned.

7. The USFWS expressed their concern for immediate repair of the freshwater control structure located on the Savannah National Wildlife Refuge (SNWR). Salinity impacts on the SNWR are critical under both the "with" and "without project" conditions. The Service has petitioned the Corps to provide a solution to the deterioration of that existing mitigation structure, which was constructed as part of a previous deepening of Savannah Harbor. The USFWS discussed how the Corps' ability to honor past commitments for mitigation affects agency expectations for the success of future project mitigation. The Corps stated that we had received HQUSACE approval to include the rehabilitation in the Expansion Project if it is not performed sooner. The Service stated that they need a quicker solution. The Corps is also working to implement a plan to address the needed rehabilitation parallel, but separate from the current deepening studies. CESAD advised they had a strategy to resolve this issue and more details would be provided soon.

8. The agencies expressed considerable uncertainty with the project's dissolved oxygen mitigation approach and the effectiveness of the Speece Cones. The results of GPA's 2007 D.O. Demonstration Project have been analyzed, but NOAA stated that the initial report did not demonstrate that the system would be effective. At this point NOAA Fisheries is not convinced that this system would be effective mitigation method. GPA's consultants are preparing a supplemental report on the 2007 test. The report is due out by 2 March. It may well be that an integral part of resolving uncertainty with this mitigation feature will include agreed upon post-construction monitoring and adaptive management measures. The agencies agreed to let the Corps know their specific concerns with the D.O. systems (getting oxygen into the water, spread of oxygenated water through the harbor, etc), so the Corps could address them.

9. The agencies commented on the importance of developing a comprehensive monitoring plan to shape potential adaptive management actions and that this plan must be reviewed and concurred in by each agency. Bill Bailey stated that the Corps included comprehensive monitoring and adaptive management plans in the 90% version of the Draft GRR and EIS, and that the Corps welcomed specifics on how to refine and improve those documents. The current proposed monitoring period is five years. The Corps has included contingency funding to implement adaptive management measures in project funding. It was discussed that for certain effects, such as the effects of the project on a species' reproductive success, five years may not be adequate. However, it was also acknowledged that some reasonable time period had to be chosen for cost estimation purposes and it was agreed five years was an adequate compromise. NOAA Fisheries agreed to review that duration and let the group know if it believed that some other duration may be needed to identify impacts to some specific resource.

10. The revised overall schedule was discussed. Each agency was given an opportunity to review and comment on the schedule prior to the meeting. The recent slip in the Economics Analysis was discussed and Steve Cone elaborated on the reason the fleet forecast was delayed. It was also mentioned the IWR understands the sense of urgency of this effort. All, except EPA, concurred in the revised schedule. EPA expressed a need to continue to review the schedule and

provide comments subsequent to the meeting in light of some of the technical discussions occurring among their staff and the Corps. We shared with all the reality of the schedule as it compares to timing of the administrative budget process. Based on the current schedule for submittal of the final GRR and EIS to HQUSACE in Jan 2010, the earliest the project would be eligible to be budgeted for construction funding would be in 2012. General Schroedel reminded the group that a schedule can bring about action, but it is the resolution of substantive issues that drives the schedule forward. Steve Green reminded the group of the importance in resolving issues now and that there are no surprises as we continue forward. The incorporation into the schedule of three of four requests by USFWS was also discussed. Later in the meeting, USFWS commented that the schedule was acceptable and that their fourth recommendation need not be incorporated if it would delay the schedule.

11. The expected effects of Stimulus Bill passage were discussed. Depending on the detailed requirements within the just-passed Stimulus Bill, all agencies recognized that the manpower resources they would need to allocate towards this project to meet their commitments may be redirected elsewhere, adversely affecting their ability to meet the schedule.

12. Col. Kertis asked how a request to approve the project would be handled by agency representatives who were temporarily appointed or acting/not permanent. EPA predicted that temporary positions would likely complicate their approval of the project, but all agreed this is an unprecedented authorization and an unknown approval process. The Corps asked agencies to (A) Define their agency's approval process for both approval of the GRR and EIS and approval as required in the project's WRDA 1999 authorization, (B) Determine if combining these two approvals is possible and establish a process to accomplish, and (C) Determine if delegation of approval down to the Regional level is possible and establish a process to accomplish that delegation. The Corps proposed that the final agency determination on the project (possibly project approval) be provided as part of the agency's comments on the final GRR and EIS. That would eliminate the need for a separate approval process.

13. Bill Bailey covered issues that are considered to be resolved or that the Corps expects to soon be resolved at the technical level. They included the following: hydrodynamic modeling, extent of funding for adverse impacts to Striped Bass, extent of land acquisition to mitigate for adverse impacts to freshwater wetlands, placement of new work sediments from the entrance channel, fish passage at New Savannah Bluff Lock and Dam as mitigation for adverse impacts to Shortnose sturgeon, wetland mitigation magnitude factor, and in-kind mitigation for loss of saltmarsh. An updated table of the outstanding environmental issues is attached to this MFR.

14. The group discussed the Corps' on-going efforts to address USFWS and SCDNR comments regarding excavation and placement of new work Cadmium-laden sediments. The Corps stated that monitoring cadmium in effluents from the placement site during the construction period would be added to the project and that it was continuing to evaluate the latest USFWS comments.

15. The Corps stated that it would continue to try to resolve the boat access to Back River issue (requested construction of a boat ramp). The Federal agencies did not identify this as a critical mitigation feature.

16. Bill Bailey stated the Corps was working the NOAA Fisheries request for a survey of near up-river Shortnose Sturgeon forage habitat. The Corps agreed to perform that survey. Mr. Bailey also stated that the Corps had recently provided NOAA with information they had requested concerning point source discharges and would like confirmation that the information meets NOAA's needs.

17. Bill Bailey provided a summary of the environmental issues, followed by a statement by Steve Green reminding the group of the importance of this harbor deepening project on the regions economy, which is especially important during this economic downturn.

18. The Corps informed the agencies that we will have a funding shortfall by mid-April 2009; and that approximately \$600 K was needed for the balance of this fiscal year. We advised the group that we are aggressively working to insure that the needed funds are obtained.

19. The Corps proposed holding these meetings on a quarterly basis. The group agreed, and tentatively scheduled the next meeting for 30 April in Atlanta.

20. The District agreed to prepare a record of the meeting and distribute it to the participants for review. The record can be used for agencies to inform their staff of discussions at this meeting and expectations for the next meeting.

21. The Federal agencies provided comments on the draft MFR that the District prepared. Those comments have been incorporated into this version of the MFR. We have attached at the end of this document detailed technical comments that EPA as a result of their review. The Corps' staff will be coordinating directly with EPA staff to address those comments.

JASON O'KANE
Project Manager

ENVIRONMENTAL ISSUES

	Issue	Resource Agency Recommendation	Corps Response	Resolution Anticipated
1	Monitoring	Develop a data analysis and information delivery plan as part of the monitoring program	DEIS contains information on proposed data analysis and information delivery. Will continue to coordinate with resource agencies to refine the plan.	Yes
2	Boat Ramp	Constructing a boat ramp on the SC side of Back River	Two sites in GA are still being pursued. If no sites are found that meet all the criteria, the project could provide funds equivalent to the cost of constructing a ramp.	Yes, staff still working issue
3	Adaptive Management	Expand adaptive management plan to include potential modifications of the oxygen injection system and modification contingency funding	Concur. Corps will include in DEIS.	Yes
4	NSBL&D Fish Passage	Install a fish passage facility at New Savannah Bluff Lock and Dam of acceptable design	Concur. Corps will coordinate with agencies after project approval for final design review.	Yes
5	Near Shore Disposal	Dispose of suitable new work sediments (meeting Georgia DNR criteria) in the nearshore area off Tybee Island	Concur. This is included in proposed project.	Yes
6	Cadmium Containment	Cap all new work sediment containing elevated cadmium concentrations ("high" vs. "low") with clean material	Corps agrees to monitor CDF effluent during construction. Corps is evaluating the 23 January USFWS comments.	Staff still working issue
7	Tidal Marsh Impacts	Provide in-kind restoration of estuarine emergent wetlands for 7.2 acres that would be excavated	Concur. Corps is pursuing restoration of a previous sediment disposal site within the harbor.	Yes, staff still working issue
8	Land Acquisition	Initiate land acquisition no later than initiation of harbor construction and complete acquisition within two years	Concur. Expect to acquire the lands within the requested time frame. Corps agrees to acreage in Draft FWCA Report.	Yes
9	Striped Bass Stocking	Fully fund Georgia DNR's striped bass stocking program	HQUSACE stated that this project cannot resolve env issues from previous deepening projects, but only mitigate for the incremental effect of this proposed deepening. Corps will fund stocking equal to level of impacts.	Yes
10	Flow Modifications	Prior to or concurrent with harbor deepening, implement flow/channel modification, continue coordination of	Concur. Corps will include intent of berm and proposed construction technique in DEIS	Yes

		berm impacts and alternatives		
11	Freshwater Supply System	Initiate repair of the Savannah NWR freshwater supply system no later than initiation of harbor construction and complete within two years of start	Concur. Corps will include in the project if not implemented prior to that time. Corps continues to work to identify a funding source to conduct the repairs sooner	Yes, staff still working issue
12	Depth Selection	In order to reduce impacts, limit channel deepening project to 44 or 45 foot	The Corps will recommend the best depth alternative considering all evaluation factors (environmental, social, and economic).	Not a technical issue
13	Sturgeon Forage Habitat	Survey portion of the river where Shortnose sturgeon would likely move in response to harbor deepening	Concur. Corps will conduct a sediment survey to confirm suitable substrates present.	Yes, staff still working issue
14	Sturgeon Habitat Criteria	Modify the criteria for acceptable habitat for Shortnose sturgeon	Still evaluating the effects of modifications to the criteria. Any revision of the criteria would be coordinated with the agencies.	Yes, staff still working issue
15	Dissolved Oxygen Data	Display dissolved oxygen levels more clearly, visually	Corps provided data from the feasibility report to agencies for review. No agency expressed a need for a different format. Corps considers this issue closed.	Yes
16	Monitoring Period	Longer post-construction monitoring period (undefined length)	Monitoring period must be defined to ensure sufficient costs are included and acquired. Corps believes 5 years is sufficient.	Yes
17	New Work Sediment Monitoring	Monitoring of new work sediments deposited in the nearshore area requested	GA DNR-CRD concurred that 2 years would be sufficient. Corps considers this issue closed.	Yes
18	Magnitude Factor	Magnitude factor be added to the procedures described in the Regulatory SOP	Direct impacts to wetlands would be <20 acres. Corps does not believe that adding a magnitude factor is warranted.	Yes
19	Economic Analysis	Economic analysis of the project be technically strong	Corps is updating its economic analysis to strengthen it and allow examination of additional scenarios.	Yes, staff still working issue
20	Speece Cones	Uncertainty about the dissolved oxygen systems effectiveness to provide the intended amount of improvement	GPA's consultants are conducting additional analysis of data from the 2007 Demonstration Project. Will	Yes, staff still working issue

			produce a supplemental report by 2 March. Corps believes the system can provide the beneficial effects intended.	
21	Air Quality	Uncertainty about the evaluation of the project's impacts to air quality	Corps believes existing air quality evaluation is sufficient. Evaluation will be updated to reflect the revised fleet forecast.	Yes, staff still working issue

DRAFT

MEETING ATTENDEES

February 17, 2009 Executive Steering Committee Meeting

	Name	Agency
1	Jason O'Brien	USACE
2	Bill Bailey	USACE
3	Heidi M. Miller	USEPA
4	Jim Giattina	USEPA
5	David Bernhart	NOAA Fisheries Service
6	Joe Schaeffer	USACE, IAD
7	Stan Merburg	USEPA
8	Ed Keritz	USACE
9	Jack Arnold	USFWS
10	Steve Green	GPA
11	David Schellie	GPA
12	Jane Lewis	USFWS
13	ED EUDALY	USFWS
14	Wilbert V. Foyner	USACE-SAD
15	Daniel Simons	USACE-SAD
16	See Meeting by phone	
17	Steve Reed	USACE-IWR
18	Jamie McClure	GPA
19	Hopie Moore-J	GPA

U.S. Environmental Protection Agency
Comments on February 17, 2009
Memorandum for Record

Comments on the Status of Technical Issues in Table of Environmental Issues

Mr. Stan Meiberg, Acting Regional Administrator, provided comments earlier, under separate cover, on the draft Meeting Summary Minutes. Attached to those draft Minutes from the Corps was a tabular summary of environmental issues. We offer the following comments to further clarify our understanding and position on the key issues of the study, and provide suggested next steps where appropriate. There have been many interim work products provided to the agencies by the Corps over the recent years. A summary of available information would help clarify the status of information pertaining to the issues.

EPA feels strongly that a meeting is needed of the technical work group prior to the preparation of the preliminary DEIS.

1. Monitoring: EPA is waiting on the updated monitoring plan for the potential alternatives to assure that all the concerns (DO impacts in harbor; salinity and velocity impacts in Middle and Back Rivers; chloride impacts for upstream water supplies; effectiveness monitoring of the Speece Cones; etc) are adequately addressed. The monitoring plan must be specifically designed to address the selected potential alternatives. EPA concurred with the specific concerns which Georgia EPD provided on the proposed oxygen injection monitoring plan. However, these concerns were not addressed in the Speece Cone demonstration and this resulted in inadequate data collection for determining the effectiveness of the Speece Cones in Savannah Harbor.

Additional coordination is needed after receipt of the monitoring plan to resolve any remaining concerns.

2. Boat Ramp: EPA has no comment on this issue.

3. Adaptive Management: A defined Adaptive Management Plan has not been provided. The agencies and the States need to come up with agreed upon methods for monitoring the harbor impacts for each potential alternative, and for monitoring and evaluating the impacts of each proposed mitigation strategy. Each project's component will have a subtle impact on the DO, salinity and velocities of harbor system, therefore an ongoing detailed data and modeling analysis of the system will have to occur over the 5 year construction and 5 year post construction monitoring.

Additional coordination is needed after receipt of the Adaptive Management Plan to resolve any remaining concerns.

4. NSBL&D Fish Passage: EPA has not taken a position on this issue although we expressed concern at the Corps' August 26-27, 2008, Alternatives Formulation briefing, concerning the stated inability of the Corps to fully fund "off-project" mitigation. Striper spawning success is closely related to the need for river water quality in order to not inhibit this important aquatic function.

This issue is unresolved at this time.

5. Near Shore Disposal: EPA needs to review all available data on the testing of the dredged materials from the Bar Channel to be placed near-shore, and based on these data, may request that additional testing be conducted, e.g., elutriate chemistry, elutriate and whole sediment bioassays, and bioaccumulation testing. Furthermore, EPA would like to review Georgia DNR Criteria for near-shore placement of these materials. Available data from testing dredged materials to be placed near-shore must demonstrate that there will be no violations of State Water Quality Standards or Federal Water Quality Criteria during the placement of the material.

This issue is unresolved at this time.

6. Cadmium Containment: EPA shares SCDNR's and USFWS's concerns, as outlined in their January 14, 2009 and January 23, 2009, respectively, comments. EPA needs to further investigate all aspects of the proposed plans for cadmium containment. EPA requests a written plan on the long-term maintenance of the cadmium containment facilities – to include information on the monitoring plan, adaptive management of the facilities in the event of problems, and information regarding the full disclosure of the disposal and maintenance plans for the Jasper County disposal sites. EPA also shares SCDNR and USFWS concerns regarding Cd concentrations in remaining exposed surfaces in the Savannah Harbor after dredging. EPA will work with the Corps in developing necessary monitoring and management plans.

This issue is unresolved at this time.

7. Tidal marsh impacts: The impacts of dredging for bend widening and turning basin expansion are essentially the same for all alternative depths. The Savannah District Standard Operating Procedure (SOP) may be appropriate to apply to the 7.2 acres of salt marsh dredging since this type of impact is specifically covered by the SOP adverse impact table. For impacts less than 10 acres, a correction for the scope of the impacts the "magnitude factor") is not needed.

This issue is resolvable with additional detail about the proposed restoration of the proposed site.

7a. Tidal Freshwater Wetland Alteration: This major impact should be included in the Meeting Minutes' attached table of Environmental Issues. EPA has a responsibility to independently review the impacts of the project. EPA needs to review the saltwater intrusion impacts of each of the Harbor deepening alternatives and mitigation options in consideration of the new low flow data now available. Each of the mitigation plans should be comprehensive and in full compliance with the "Compensatory Mitigation for Losses of Aquatic Resources (Rule), Final Rule", 40 CFR Part 230, issued on April 10, 2008. The mitigation plans for the alternatives should include the information as outlined in the Rule's twelve basic requirements, including watershed assessment and functional assessments, preservation area requirements, financial assurances, monitoring and adaptive management, and a clearly described rationale for the proposed project-specific mitigation siting (versus an approved mitigation bank), etc. The documentation for the mitigation plans for each of the alternatives should be at the level of information equivalent to a "prospectus" as described by the Rule and as required by all commercial mitigation banks. The Corps of Engineers Charleston District has available an outline of the information that they require in a "prospectus" and this should be of valuable assistance in the preparation of the mitigation plans.

This issue is unresolved at this time.

8. Land Acquisition: This issue is relevant to the impacts to tidal freshwater wetlands addressed in issue 7a. The Savannah District's Standard Operating Procedures (SOP) is not designed to quantify the adverse impacts to wetlands due to changes in salinity and thus conversion of one wetland type to another. This is the larger wetland adverse impact associated with the project. Changes from any natural or baseline condition are considered to be "adverse" even though the altered wetlands will have their own suite of functions, some of which may be in common with the previous wetland type. Also, the scope of these impacts will vary over the impact area. Normally one would use a functional assessment to look at the lost functions due to the adverse impacts and then apply the same functional assessment to the functional gain due to the mitigative action. However, currently the Savannah District is proposing wetland preservation as the type of compensatory mitigation (at an approximate 8:1 ratio for the 48-foot alternative). This does not replace any lost functions and is less than EPA's recommended 10:1 to 60:1 ratios for preservation cited in the EPA Region 4 Mitigation Policy. However, it should be noted that the wetlands impacted will still retain some of the original functions and will still be functioning wetlands, albeit of a different type. Without a functional assessment, the use of preservation and the determination of the appropriate quantity of mitigation are policy, not technical, issues.

One further note regarding the SOP. Morphological changes to a stream are covered by the SOP, and the proposed dredging of the Savannah River is clearly a morphological change that will increase channel instability. This is a substantial adverse impact under the stream portion of the

SOP. There is some debate as to whether tidally influenced streams are “streams” similar to freshwater streams with unidirectional flow. So there is some debate as to how to treat these types of systems under the SOP. Regardless of this debate, it appears the subsequent channel instability and associated impacts with the actual dredging and other channel modifications have not been fully assessed, let alone considered for mitigation.

This issue is unresolved at this time.

9. Striped Bass Stocking: EPA has no comment on this issue.

10. Flow Modification: Our assumption is that this issue is related to the diversion of flow from the main river into the Little Back River as shown in various mitigation alternatives, and the impacts to the Refuge management. The effectiveness of this diversion in preventing the salinity intrusion into the freshwater wetlands and preventing its conversion is a significant unknown.

Note that the States, in conjunction with USGS, have completed some velocity and flow monitoring (fall 2008) of the Middle and Back Rivers and Georgia has contracted to continue this monitoring starting in July 2009 to help address impacts in the Middle and Back Rivers. Evaluation of the available fall of 2008 monitoring data and detailed evaluation of the alternatives’ modeling must be completed before resolution can be expected. Additional coordination is needed after receipt of the USACE technical analysis, including all the pertinent modeling runs.

This issue is unresolved at this time.

11. Freshwater Supply System: This is a proposed mitigation for a previous deepening project that was but never fully implemented in the SNWR. EPA has no comment on this issue at this time.

12. Depth Selection: EPA agrees that this is not an issue for technical resolution at this time. However, this will be the major decision for the project. The appropriate point in the review of this issue is after the Draft EIS is issued and has been reviewed by all the agencies; with hopeful interagency consensus on the depth and all mitigation.

13. Sturgeon Forage Habitat: The Short-nose sturgeon is a listed species and its success is closely related to river water quality. EPA will require assurances that harbor deepening will not inhibit this aquatic use of the river.

14. Sturgeon Habitat Criteria: This is a NMFS/FWS issue closely related to the preceding issue and EPA will require assurances that the updated criteria will be protective of the Short-nose sturgeon's use of the river

15. Dissolved Oxygen Data: We recommend that USACE provide the data and model outputs to the federal and State agencies in binary files which the models can easily produce. This will allow review of the data in the detail that is appropriate.

16. Monitoring Period: Five-year monitoring during construction and 5 years of post construction monitoring should be adequate, as long as the adaptive management approach and the mitigation methods are working. If there is a problem or issue with the proposed mitigation in that it's not working appropriately then additional monitoring may be needed after the mitigation methods are updated.

This issue appears resolved at this time.

17. New Work Sediment Monitoring: EPA would like to review the 2-year monitoring plan for placement of sediments in the near shore area. Additionally, if any material is to be taken offshore for placement in the Savannah ODMDS, it must go through established procedures under the MPRSA and EPA's Ocean Disposal Criteria, and there must be documented demonstration of compliance with the Ocean Dumping Criteria, including a MPRSA Section 103 Evaluation and written concurrence from EPA for disposal in the Savannah ODMDS.

This issue is partially resolved.

18. Magnitude Factor: Please refer to EPA's response to issue #7.

19. Economic Analysis: This is not a technical issue but rather a NEPA requirement of disclosure. EPA said at the AFB meeting that we had questions about the clarity of the rationale and as did the Corps' headquarters staff. EPA has not been provided any additional data to review at this time.

Resolution is uncertain.

20. Speece Cones: EPA is awaiting receipt of a final report. EPA's technical position is that the Speece Cones may work but we are unsure how effective they will be in a tidal system. Note that EPA, the States and dischargers are also looking at oxygen injection systems as a wastewater

treatment alternative, and based on the available data on the O₂ injection systems we can expect 75 to 80 percent transfer efficiency. Again for proper evaluation of the USACE proposed O₂ injection system there are additional details that need to be identified (e.g., where the injectors are located, at what depth and with what kind of diffuser pipe). All these variables must be evaluated for all the alternatives.

Additional coordination is needed after receipt of the USACE technical analysis and the modeling scenarios of the potential alternatives with and without the O₂ injection. In addition, the Corps needs to address in the DEIS the legal mechanism that will be used to ensure that, if O₂ injection systems are put in place, they will be properly operated and maintained in perpetuity. The proposed TMDL will allow the dischargers to lower the DO in the system up to 0.1 mg/l, compared to the 0.8 mg/l impact they are presently causing. The proposed deepening without the O₂ injection will lower the DO in the harbor approximately 1.0 mg/l, therefore if the oxygen injection systems are not kept in operation serious water quality issues will occur.

This issue is unresolved at this time.

21. Air Quality – This is a concern regarding direct and indirect impacts of port expansion. EPA requests a detailed quantitative analysis for the DEIS of the impacts of port expansion on criteria air pollutants.

Region 4 continues to encourage the Corps to include in the DEIS an evaluation of the potential local impacts of the proposed actions associated with air toxics - both during construction and associated with operations of the port. This evaluation should follow the tiered risk-based approach outlined in the Air Toxics Risk Assessment Reference Library, Volume 1, Section 3.3.3 (http://epa.gov/ttn/fera/risk_atra_main.html), including a detailed emissions inventory of mobile and stationary sources of air toxics at the port followed by dispersion modeling and evaluation of the potential health impacts. The DEIS should also address alternatives to mitigate potential impacts of air toxics during construction and operation. This process was carried out for an expansion effort at the Port of Los Angeles and is provided here as an example: (http://www.portoflosangeles.org/EIR/ChinaShipping/DEIR/deir_china_shipping.asp).

General Technical Comments

USACE, EPA and States of Georgia and South Carolina, along with the other Federal Agencies jointly developed and/or reviewed the data and modeling on which the deepening water quality analyses are based. This culminated in a January 2006 data and modeling report that used 1999 as a critical condition (low flow and high temperature) year. All agreed that the 2006 model and data report were adequate to make initial screening projections and evaluations of the potential deepening alternatives; however now we have new low flow data for 2007/08 which must be considered in the alternatives analysis.

EPA agrees that a reasonable suite of port expansion depth alternatives are being addressed. However, EPA wishes to stress the importance of a comprehensive alternatives evaluation of potential port sites in the DEIS. The site selection criteria need to be equal across all alternatives in order to compare sites objectively. There should not be a presumption that the Savannah River would be deepened to Garden City in the evaluation of potential sites down-river.

DRAFT

CESAD-PDS-P

2 April 2009
(revised 6Apr 09)

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project – Regional Federal Resources Agency Meeting

1. BG Schroedel, South Atlantic Division Commander, called and held a meeting on 31 March 2009, with the three other Federal Agencies named in the subject project authorization that must all concur in the analysis and recommendations for deepening (or not) the harbor at any depth beyond the currently existing 42 feet depth. The agencies participating, in addition to the Corps, were US Fish and Wildlife Service, US Environmental Protection Agency – Region 4, and NOAA Fisheries Service.

2. Purpose of meeting was to discuss and insure that all agencies are aware of each others primary concerns associated with the evaluation of alternatives; processing of the draft and final environmental and project documents; near term actions; and overall commitment to the “Savannah Harbor Executive Steering Group” process (given the unique authorization).

3. The participants:

- a. BG Joseph Schroedel – SAD Commander
- b. COL Ed Kertis – Savannah District Commander
- c. Wilbert Paynes – SAD Planning Chief
- d. Jim Giattina – Director Water Protection Division, US EPA Region 4
- e. Heinz Mueller- US EPA Region 4
- f. Sam Hamilton – Regional Director, US Fish & Wildlife Service
- g. Dr. Roy Crabtree – Regional Administrator NMFS - via phone
- h. Dr. Stephania Bolden – NOAA Fisheries – via phone
- i. William Bailey – Mobile/Savannah Regional Planning Center - via phone

4. Highlights:

a. All agencies are committed to the Executive Steering Group process and value that forum as a means of insuring that the leadership of each agency is aware of major issues, outcomes, procedural methods, and facilitation actions and decisions.

b. All agencies expressed concurrence for an objective evaluation and assessment of alternatives and are not predisposed to any particular outcome. They expressed the need to display all impacts, mitigation and benefits by incremental channel depths. This would permit each agency to describe their assessment of alternatives and discuss greater or lesser risk and uncertainty by increments.

c. While the schedule is important, it was considered equally important that a full airing of technical issues occur and that the schedule reflect the needed agency reviews and technical review meetings. Additionally, given the unique project authorization and

because all three resource agencies are "Cooperating Agencies" on the EIS, they requested the schedule reflect a review by their agency of the initial draft report and EIS (60 days) before distribution to the public for review. The Corps agreed to send each agency a copy of the current General Reevaluation Report and EIS schedule for their review and input and to continue to work with the Federal resource agencies to get the technical issues analyzed and resolved. The resource agencies agreed to review the schedule by 30 April and to share where they see gaps in the science/information that will likely lead to longer review time and impacts to the schedule, at the next Executive Steering Group meeting.

d. The US Fish and Wildlife Service was very clear that a prerequisite to any decision by them on further deepening was a firm demonstration by the Corps that the existing mitigation (water control system on the Savannah National Wildlife Refuge) will be or are repaired. The Service views action by the Corps on the existing mitigation systems as providing assurance that future mitigation will be implemented and maintained in the future.

e. EPA indicated that they had just received supplemental information from the Georgia Port Authority 2007 Oxygen Injection Demonstration Project. This information will be reviewed by EPA, NMFS, and USFWS (through USGS). The Corps reiterated that it would distribute the draft Adaptive Management Plan for each agency to review. The Corps committed to proactively track the transmission and receipt of key scientific information to the resource agencies.

f. The Corps committed to sending minutes of the Executive Steering Group meeting to each agencies within 24 hours of the meeting for their review. When finalized the minutes would then be sent to Governor Perdue to keep him informed.

g. During the 17 February 2009 Executive Steering Group meeting the resource agencies agreed to get confirmation within their agency of who/what level will issue the agencies final position per the project authorization. It was reemphasized that each agency would continue to check with their organization and report on this at the next meeting.

h. It was agreed among all agencies that technical meetings would be convened among their representatives to ensure we are working systematically through the issues/concerns remaining. EPA provided the Corps a summary of their views on remaining technical issues/concerns to begin to frame the discussions. The Savannah District will to set up the first meeting and coordinate with all agencies.

5. Lastly, BG Schroedel reminded the participants that the next Federal Executive Steering group meeting, 30 April 2009 at SAD, would be his last official meeting before retiring. He expressed his appreciation to this group and shared that the new SAD Commander, BG Todd T. Semonite, will participate in the next meeting.

WILBERT V. PAYNES
Chief, Planning and Policy
South Atlantic Division

CESAM-PD

14 April 2009

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project; Technical meeting with EPA on 08 April 2009

1. EPA Region 4 and the Corps held a meeting on 08 April 2009 for the technical staff to discuss concerns that EPA had previously identified about the project. The meeting was held at EPA from 0930 to 1600 EST. The participants included the following:

EPA: Jim Giattina – Director, Water Protection Division
 Tom Wellborn – Branch Chief, Water Protection Division
 Ken Mitchell – Section Chief, Air Division
 Paul Wagner – Air Quality
 Jim Greenfield - Water Mgt (Modeling, TMDL, D.O.)
 Ted Bisterfield – NEPA Review (Office of Policy Mgt)
 Doug Johnson – Ocean Disposal, Sediment Quality

Corps: Daniel Small - CESAD
 Vechere Lampley - CESAD
 Bill Bailey – CESAM-PD

2. I started with an overview of the status of the Savannah Harbor Expansion Study (SHEP) and development of the DEIS and GRR. EPA had provided comments on the Corps' 90% version of those documents in August 2008. I explained the purpose of the meeting – for the technical staffs to discuss comments and concerns that EPA had recently expressed about the technical analyses for the project and their conclusions. The Corps envisions this as the first of possibly several meetings between the staffs to address and resolve EPA's concerns.

As a basis for the discussions, we primarily used the written concerns that EPA had provided the Corps on 13 March and the draft responses that Savannah District had prepared and provided EPA the day before the meeting. The Comments and draft Responses are attached at the end of this MFR in a single document. We concentrated our discussions on the following issues: (1) air quality, (2) dissolved oxygen mitigation, (3) water quality, and (4) sediment quality and management. Several other issues were also discussed to lesser extents.

Additional meetings of the technical staff will be needed before EPA is satisfied that the project reports reflect that sufficient analyses have been conducted and they can support their conclusions. The USFWS and NOAA Fisheries expressed some overlapping concerns, so meetings with those agencies will likely also be required. Joint meetings may be useful for some issues, primarily mitigation for dissolved oxygen and wetlands.

3. We discussed EPA's role in this unique project – as an approving agency instead of just as a reviewing agency. The Corps will provide a copy of the authorizing legislation by email. EPA will review that legislation and determine whether that changes how they view the impact analyses and mitigation plan proposals. The question is whether EPA approval means that the documents need to contain analyses as EPA would perform them if they were the proponent and funding were not a factor. That is a higher standard than determining that an analysis is sufficient to reach a decision on a project. Heinz Mueller (Chief of NEPA Office) will need to review the authorizing language and would provide any additional input on EPA's role in assessing the project, reviewing the project documents (GRR and EIS), and making a final decision on the acceptability of the project.

4. EPA stated that it will be critical that incremental analyses and mitigation measures be developed for all depths, not just the 48-foot depth. The Corps reiterated that the environmental analyses are being performed and mitigation plans developed for each of the project depth alternatives: 44-, 45-, 46-, and 48-foot authorized depth.

5. The group discussed the following specific items:

A. Air Quality. The Corps summarized its 2008 Air Emission Inventory (Appendix K of the DEIS) as having incorporated additional analyses that EPA had requested after their review of a previous version. The additional information includes air emissions from vessels calling at other terminals, landside equipment serving GPA and private berths, tugs serving all vessels, and other equipment using or servicing the harbor. EPA reiterated its comments on the 90% version of the EIS that the Corps model the localized (hot spot) effects of air emissions associated with the harbor. They recommended that the Port of Los Angeles air quality assessment be used as a model/template. The Corps asked why detailed analysis of the localized effects would be required since the analyses conducted so far indicate that air emissions would decrease if the harbor were deepened from those that would occur if the harbor is not deepened. EPA agreed to review the need for analyses of localized effects.

EPA was surprised that the conclusion of the project's air quality analysis indicates a reduction in air emissions if the project is implemented. The Corps explained that its analyses show that air emissions would increase in the future as cargo volumes through the harbor increase as a result of population growth. The Corps agreed that the project documents would need to explain why cargo volumes and vessel transits are expected to increase in the future in the Without Project Conditions (no harbor deepening). In light of statements made by the various ports concerning the purpose for deepening a harbor, EPA requested information on the Corps' expectations of how a deepening project would affect the volume of cargo that moves through a port. The Corps stated that such information would be within its economic analysis.

B. **Water Quality.** EPA feels that GPA's Supplemental Report on their 2007 Dissolved Oxygen Demonstration Project is not conclusive. Since there is still some uncertainty concerning the performance of the D.O. systems, EPA believes that model verification will be needed. They recommended that if the project is constructed, that a Transfer Efficiency Study be performed immediately after construction to identify how well the oxygen is getting transferred to the water and distributed through the harbor. The Corps would then need to operate the systems to provide the amount of oxygen identified by the model as being needed. EPA agreed to provide draft language on what is needed for the Transfer Efficiency Study.

EPA questioned how the Corps would guarantee that the D.O. systems would be operated in the future to provide the mitigation that would be needed by the project. The Corps explained that as a mitigation feature, the D.O. systems would be considered a General Navigation Feature. That means that the Corps would be responsible for operation of the systems. The Corps' O&M budget is expected to continue to be tight. EPA questioned what the Corps would do if it did not receive sufficient funds to both maintain authorized depths in the navigation channel and operate the D.O. systems. The staff agreed to work to develop language to help define what the Corps would do if Congress did not provide sufficient funds for all budgeted project needs in a given year.

The Corps conducted the water quality modeling analyses based on 1999 conditions. When the agencies requested that 1999 be used for that purpose, that year was the lowest flow that had experienced in recent history. The 2007/2008 drought has since produced lower flows and EPA now believes the Corps should consider the 2007/2008 flow condition in the water quality analyses. This would require some amount of additional modeling. One possibility is for someone to model the 2007/2008 flow for one depth alternative and compare it to the results using the 1999 flows. If the results differ by only a small amount – 5 to 10% – the difference may be within the accuracy of the model. If the results differ more than 25%, then reanalysis of all project depths using the 2007/2008 flows may be warranted. The amount of difference will not be known until the preliminary modeling is conducted using the 2007/2008 low flows. EPA will perform the preliminary modeling.

EPA stated that it would like the Corps to provide the following EFDC and WASP input and output files:

- 44-foot depth alternative using flow rerouting Plan 6A
- 45-, 46, and 48-foot depth alternative using flow rerouting Plan 6B

It would also like the EFDC and WASP input files for the 48-foot depth alternative using flow rerouting Plan 7.

C. **Sediment Quality.** EPA's primary concerns are for the management of the cadmium-laden sediments and potential impacts from the exposed surfaces remaining along the navigation channel. EPA requested more information to help them understand how the dredged channel would be managed with exposure of the cadmium-laden sediment, as well as how overdepth dredging and advanced maintenance would affect the exposed surfaces. The Corps

stated that the contractor's report was fairly conclusive about the low risk of environmental impact from exposure of sediment surfaces along the navigation channel. EPA agreed to review the recent sediment testing reports and the Corps' evaluation and determine whether they agree with the conclusions.

EPA requested information on how the confined disposal facilities (CDFs) would be managed over the long term to ensure that future activities would not destroy the integrity of the managed disposal site where the cadmium sediments would be deposited and covered. The concern is both for the potential use of the CDFs by the Jasper Ocean Terminal and for use by normal O&M activities once those presently engaged in the process have retired. The Corps stated that it prepares a Dredged Material Management Plan for each project that is intended to provide continuity over the years on what work is to be performed within the project, including at the CDFs. That document would be the Corps' primary traditional mechanism to transmit environmental clearance and compliance information to future employees. The Corps said it had been asked to release its dredged material disposal easement on the sites presently identified for placement of the cadmium-laden sediments. The Corps said it would investigate what mechanism it may have to place restrictions on the future use of a site if/when it releases its disposal easement.

EPA requested information on the proposed nearshore placement sites and plans. That plan was in the 90% version of the DEIS and the Corps will separately provide it to Doug Johnson.

EPA stated that biological testing of new work sediments would be needed prior to their disposal in the Savannah Ocean Dredged Material Disposal Site (ODMDS) (Section 103 Evaluation) unless we found that sediments that had been biologically tested within the last 10 years was similar physically and chemically to these new work sediments. EPA stated that a new Site Management and Monitoring Plan is needed for the Savannah ODMDS. EPA cannot concur in a new Section 103 Evaluation until a new SMMP is approved. The SMMP will likely be developed as part of the O&M Program, since they will need to use the ODMDS prior to any harbor deepening being constructed.

6. The group also briefly discussed the following items:

- **Monitoring and Adaptive Management Plan.** EPA said they had received the Monitoring and Adaptive Management Plan and will be providing comments on that document.
- **Boat Ramp:** EPA did not intend to provide any comments on this issue. They consider this issue resolved.
- **Striped Bass Stocking:** EPA did not intend to provide any comments on this issue. They consider this issue resolved.
- **Freshwater Supply System:** EPA did not intend to provide any comments on this issue. They consider this issue resolved.

- **Monitoring Period:** EPA stated that the proposed monitoring during construction and 5 years of post-construction monitoring should be adequate, as long as the adaptive management approach and the mitigation methods are working. They consider this issue resolved.

7. Not all pertinent EPA staff were available to discuss the project on 8 April. EPA recommended the Corps host an interagency meeting to discuss its wetland concerns (impacts to tidal freshwater wetlands, loss of saltmarsh, and proposed wetland mitigation features).

William Bailey
Savannah Unit Chief

----- **DRAFT** -----
Corps Responses
to
U.S. Environmental Protection Agency
Comments on February 17, 2009
Memorandum for Record

Comments on the Status of Technical Issues in Table of Environmental Issues

Mr. Stan Meiberg, Acting Regional Administrator, provided comments earlier, under separate cover, on the draft Meeting Summary Minutes. Attached to those draft Minutes from the Corps was a tabular summary of environmental issues. We offer the following comments to further clarify our understanding and position on the key issues of the study, and provide suggested next steps where appropriate. There have been many interim work products provided to the agencies by the Corps over the recent years. A summary of available information would help clarify the status of information pertaining to the issues.

EPA feels strongly that a meeting is needed of the technical work group prior to the preparation of the preliminary DEIS.

1. Monitoring: EPA is waiting on the updated monitoring plan for the potential alternatives to assure that all the concerns (DO impacts in harbor; salinity and velocity impacts in Middle and Back Rivers; chloride impacts for upstream water supplies; effectiveness monitoring of the Speece Cones; etc) are adequately addressed. The monitoring plan must be specifically designed to address the selected potential alternatives. EPA concurred with the specific concerns which Georgia EPD provided on the proposed oxygen injection monitoring plan. However, these concerns were not addressed in the Speece Cone demonstration and this resulted in inadequate data collection for determining the effectiveness of the Speece Cones in Savannah Harbor.

Additional coordination is needed after receipt of the monitoring plan to resolve any remaining concerns.

RESPONSE: The Corps envisions the monitoring to be the same no matter which depth alternative is selected, if any. We would consider specific comments or suggested refinements to the Monitoring and Adaptive Management Plan that we included in the 90% version of the DEIS at any time. We intend to include an updated monitoring plan in the DEIS.

2. Boat Ramp: EPA has no comment on this issue.

RESPONSE: Does EPA expect to comment on this issue? We would like to know if further coordination is needed to resolve any concerns your agency may have on this issue.

3. Adaptive Management: A defined Adaptive Management Plan has not been provided. The agencies and the States need to come up with agreed upon methods for monitoring the harbor impacts for each potential alternative, and for monitoring and evaluating the impacts of each proposed mitigation strategy. Each project's component will have a subtle impact on the DO, salinity and velocities of harbor system, therefore an ongoing detailed data and modeling analysis of the system will have to occur over the 5 year construction and 5 year post construction monitoring.

Additional coordination is needed after receipt of the Adaptive Management Plan to resolve any remaining concerns.

RESPONSE: Appendix D of the 90% version of the DEIS contained a Monitoring and Adaptive Management Plan. The early part of the plan describes how the various resources would be monitored and when reports would be available for review. The later part describes how and by whom decisions would be made based on that monitoring data. The District would consider any specific comments that an agency may provide, but understands that they are likely to provide additional comments during the formal review when the DEIS is made available to the public.

4. NSBL&D Fish Passage: EPA has not taken a position on this issue although we expressed concern at the Corps' August 26-27, 2008, Alternatives Formulation briefing, concerning the stated inability of the Corps to fully fund "off-project" mitigation. Striper spawning success is closely related to the need for river water quality in order to not inhibit this important aquatic function.

This issue is unresolved at this time.

RESPONSE: The District would construct the mitigation features concurrently with any harbor deepening that is implemented. This would include this fish passage structure. This structure would be implemented as mitigation for impacts to Shortnose sturgeon, not Striped bass. We consider the mitigation features to be part of the needed construction and would request funds to construct the entire project as quickly as possible.

Does EPA expect to take a position on this issue? We would like to know if further coordination is needed to resolve any concerns your agency may have on this issue.

5. Near Shore Disposal: EPA needs to review all available data on the testing of the dredged materials from the Bar Channel to be placed near-shore, and based on these data, may request that additional testing be conducted, e.g., elutriate chemistry, elutriate and whole sediment bioassays, and bioaccumulation testing. Furthermore, EPA would like to review Georgia DNR Criteria for near-shore placement of these materials. Available data from testing dredged

materials to be placed near-shore must demonstrate that there will be no violations of State Water Quality Standards or Federal Water Quality Criteria during the placement of the material.

This issue is unresolved at this time.

RESPONSE: The Corps provided Doug Johnson at EPA with the various sediment testing reports prepared for this new work material. Appendix M of the 90 % version of the DEIS contains our Sediment Quality Evaluation. Appendix H contains the Section 404(b)(1) Evaluation, which includes information on the quantities of sediment to be excavated and deposited in various nearshore sites. We have attached a document "Nearshore Placement Plan" that we prepared in 2008 that describes the process we used to develop our plan for depositing new work sediments in the nearshore area. That document contains the following statements: "GA DNR-CRD concluded that we should evaluate nearshore placement of sediments exceeding an 80 % sand content (including shell hash). The District committed to identify areas along the entrance channel that meet that criteria and quantify the volume of O&M sediments normally removed from those areas. The Corps would not try to create a high beach (above MHW), since the sand content did not approach the 95% threshold normally desired of such sediments." EPA should contact GA DNR-CRD directly for specific information on GA DNR criteria. Kelie Moore (912-264-7218) has been their technical POC on the SH Expansion Project.

6. Cadmium Containment: EPA shares SCDNR's and USFWS's concerns, as outlined in their January 14, 2009 and January 23, 2009, respectively, comments. EPA needs to further investigate all aspects of the proposed plans for cadmium containment. EPA requests a written plan on the long-term maintenance of the cadmium containment facilities – to include information on the monitoring plan, adaptive management of the facilities in the event of problems, and information regarding the full disclosure of the disposal and maintenance plans for the Jasper County disposal sites. EPA also shares SCDNR and USFWS concerns regarding Cd concentrations in remaining exposed surfaces in the Savannah Harbor after dredging. EPA will work with the Corps in developing necessary monitoring and management plans.

This issue is unresolved at this time.

RESPONSE: The Corps provided Doug Johnson at EPA with the various sediment testing reports prepared for this new work material. Appendix M of the 90 % version of the DEIS contains our Sediment Quality Evaluation. That Evaluation describes why the Corps has concluded that the exposed surfaces in the river do not present significant concern to fish or wildlife resources. The DEIS will contain a description of our proposed sediment placement plans. The basic plan is for the cadmium-laden sediments to be deposited in an existing CDF and covered and not disturbed in the future. The initial cover would be 2-foot thick layer of sediments which contain cadmium below levels of concern. Future deposition of additional O&M sediments would further isolate the cadmium-laden sediments. The DEIS will also contain a description of the monitoring we propose during the construction period.

7. Tidal marsh impacts: The impacts of dredging for bend widening and turning basin expansion are essentially the same for all alternative depths. The Savannah District Standard Operating Procedure (SOP) may be appropriate to apply to the 7.2 acres of salt marsh dredging since this type of impact is specifically covered by the SOP adverse impact table. For impacts less than 10 acres, a correction for the scope of the impacts the "magnitude factor") is not needed.

This issue is resolvable with additional detail about the proposed restoration of the proposed site.

RESPONSE: The Corps has provided information on the proposed restoration of Area 1S and will provide additional technical information soon.

7a. Tidal Freshwater Wetland Alteration: This major impact should be included in the Meeting Minutes' attached table of Environmental Issues. EPA has a responsibility to independently review the impacts of the project. EPA needs to review the saltwater intrusion impacts of each of the Harbor deepening alternatives and mitigation options in consideration of the new low flow data now available. Each of the mitigation plans should be comprehensive and in full compliance with the "Compensatory Mitigation for Losses of Aquatic Resources (Rule), Final Rule", 40 CFR Part 230, issued on April 10, 2008. The mitigation plans for the alternatives should include the information as outlined in the Rule's twelve basic requirements, including watershed assessment and functional assessments, preservation area requirements, financial assurances, monitoring and adaptive management, and a clearly described rationale for the proposed project-specific mitigation siting (versus an approved mitigation bank), etc. The documentation for the mitigation plans for each of the alternatives should be at the level of information equivalent to a "prospectus" as described by the Rule and as required by all commercial mitigation banks. The Corps of Engineers Charleston District has available an outline of the information that they require in a "prospectus" and this should be of valuable assistance in the preparation of the mitigation plans.

This issue is unresolved at this time.

RESPONSE: The Corps has provided EPA with information on the salinity impacts to freshwater wetlands as that data has been developed over the years. EPA staff has had the opportunity to participate in the Wetland Interagency Team that worked on this issue since 2003. The 90% version of the DEIS contains a description of how the impact and mitigation evaluations were conducted, as well as their outputs.

The compensatory mitigation "Final Rule" is part of 33 CFR, Part 325, which is titled "**PROCESSING OF DEPARTMENT OF THE ARMY PERMITS**". The stated purpose of the Rule is to establish standards and criteria "to offset unavoidable impacts to waters of the United States authorized through the issuance of Department of the Army (DA) permits". It applies individual permits, not civil works projects such as the Savannah Harbor Expansion

Project. Since the proposed wetland mitigation is being used for a single project, it is not considered a wetland bank like those developed by private interests for profit and application in the Regulatory Program. Much of the information sought about proposed mitigation in the "Reviewer's Checklist for Mitigation Bank Documents", dated 6-18-08 and provided by Bob Lord is already included in the DEIS. It may not be in the format those who review proposed individual regulatory permits are accustomed to seeing, but the same type of information is in the DEIS or GRR.

8. Land Acquisition: This issue is relevant to the impacts to tidal freshwater wetlands addressed in issue 7a. The Savannah District's Standard Operating Procedures (SOP) is not designed to quantify the adverse impacts to wetlands due to changes in salinity and thus conversion of one wetland type to another. This is the larger wetland adverse impact associated with the project. Changes from any natural or baseline condition are considered to be "adverse" even though the altered wetlands will have their own suite of functions, some of which may be in common with the previous wetland type. Also, the scope of these impacts will vary over the impact area. Normally one would use a functional assessment to look at the lost functions due to the adverse impacts and then apply the same functional assessment to the functional gain due to the mitigative action. However, currently the Savannah District is proposing wetland preservation as the type of compensatory mitigation (at an approximate 8:1 ratio for the 48-foot alternative). This does not replace any lost functions and is less than EPA's recommended 10:1 to 60:1 ratios for preservation cited in the EPA Region 4 Mitigation Policy. However, it should be noted that the wetlands impacted will still retain some of the original functions and will still be functioning wetlands, albeit of a different type. Without a functional assessment, the use of preservation and the determination of the appropriate quantity of mitigation are policy, not technical, issues.

One further note regarding the SOP. Morphological changes to a stream are covered by the SOP, and the proposed dredging of the Savannah River is clearly a morphological change that will increase channel instability. This is a substantial adverse impact under the stream portion of the SOP. There is some debate as to whether tidally influenced streams are "streams" similar to freshwater streams with unidirectional flow. So there is some debate as to how to treat these types of systems under the SOP. Regardless of this debate, it appears the subsequent channel instability and associated impacts with the actual dredging and other channel modifications have not been fully assessed, let alone considered for mitigation.

This issue is unresolved at this time.

RESPONSE: The District's use of the Regulatory Standard Operating Procedures to quantify the number of acres required as preservation to compensate for the conversion of freshwater and brackish wetlands stems from Bob Lord's 2007 recommendation to use that approach on this project. Replacement ratios are unacceptable to HQUSACE, and the SOP provides a rationale for determining the extent and acceptability of proposed mitigation actions. Preservation is an accepted procedure in the SOP and the SOP quantifies the mitigation need through evaluation of the functional value of both the impacted lands and the lands to be acquired. The Corps agrees

that the impacted marshes will retain many of the same functions that they presently possess. As discussed with EPA staff, that would make a detailed functional assessment to determine the extent of the lost wetland functions very difficult from a technical perspective.

The District does not concur that the proposed deepening of the navigation channel would be a morphological change that leads to channel instability. In general, no dredging is proposed of the existing side slopes. The dredging would create a deeper channel by extending the existing side slopes lower. This would effectively decrease the bottom width of the channel. The decision to not widen the existing channel cross-section was a conscious one that the PDT took to preserve the stability of the side slopes and limit impacts to adjacent high ground. EPA is incorrect in stating that channel instability and associated impacts with the actual dredging and other channel modifications have not been fully assessed or considered for mitigation. The Engineering Appendix of the GRR, which was provided to EPA in July 2008, contains the slope stability analysis, the bank erosion analysis, and the coastal erosion analysis that the Corps has conducted to assess the channel and shoreline stability effects of the various depth alternatives.

9. Striped Bass Stocking: EPA has no comment on this issue.

RESPONSE: Does EPA expect to take a position on this issue? We would like to know if further coordination is needed to resolve any concerns your agency may have on this issue.

10. Flow Modification: Our assumption is that this issue is related to the diversion of flow from the main river into the Little Back River as shown in various mitigation alternatives, and the impacts to the Refuge management. The effectiveness of this diversion in preventing the salinity intrusion into the freshwater wetlands and preventing its conversion is a significant unknown.

Note that the States, in conjunction with USGS, have completed some velocity and flow monitoring (fall 2008) of the Middle and Back Rivers and Georgia has contracted to continue this monitoring starting in July 2009 to help address impacts in the Middle and Back Rivers. Evaluation of the available fall of 2008 monitoring data and detailed evaluation of the alternatives' modeling must be completed before resolution can be expected. Additional coordination is needed after receipt of the USACE technical analysis, including all the pertinent modeling runs.

This issue is unresolved at this time.

RESPONSE: EPA states that the effectiveness of the proposed flow modifications is a significant unknown. There will be unknowns about any engineered structure until it has been constructed and operated under different conditions. Your letter mentions additional data that was recently gathered by the States and USGS and some that is scheduled to be gathered in 2009. If you could provide that information, we would be glad to evaluate it.

Your comments state that "Evaluation of the available fall of 2008 monitoring data and detailed evaluation of the alternatives' modeling must be completed before resolution can be expected." Is that an evaluation that EPA intends to perform?

Your comments state that "Additional coordination is needed after receipt of the USACE technical analysis, including all the pertinent modeling runs." We believe we have provided all the technical modeling information that you have requested. If that is not the case, please let us know. If it is the case, is the EPA staff ready to begin that specific coordination?

11. Freshwater Supply System: This is a proposed mitigation for a previous deepening project that was but never fully implemented in the SNWR. EPA has no comment on this issue at this time.

RESPONSE: The Freshwater Control System is located on lands within the Savannah National Wildlife Refuge. The USFWS manages that property. When the system was being constructed, the USFWS reversed its previous approval and requested we not construct one aspect of the system.

Does EPA expect to take a position on this issue? We would like to know if further coordination is needed to resolve any concerns your agency may have on this issue.

12. Depth Selection: EPA agrees that this is not an issue for technical resolution at this time. However, this will be the major decision for the project. The appropriate point in the review of this issue is after the Draft EIS is issued and has been reviewed by all the agencies, with hopeful interagency consensus on the depth and all mitigation.

RESPONSE: No response needed.

13. Sturgeon Forage Habitat: The Short-nose sturgeon is a listed species and its success is closely related to river water quality. EPA will require assurances that harbor deepening will not inhibit this aquatic use of the river.

RESPONSE: The Corps is coordinating with NOAA-Fisheries on this issue, as they are the Federal agency who oversees compliance with the Endangered Species Act on this species. The proposed harbor deepening would adversely affect Shortnose sturgeon habitats and mitigation is proposed to compensate for those impacts.

14. Sturgeon Habitat Criteria: This is a NMFS/FWS issue closely related to the preceding issue and EPA will require assurances that the updated criteria will be protective of the Short-nose sturgeon's use of the river

RESPONSE: At NOAA Fisheries request, the Corps is assessing whether different habitat suitability criteria may better reflect recent data on the locations at which Shortnose sturgeon are found in the harbor. If we and NOAA find that revised criteria are better indicators of observed acceptable SNS habitat, the Corps would approach the Fishery Interagency Coordination Team to determine if they concur. It would only be after approval of the group that developed the initial habitat suitability criteria, that the Corps would implement it for impact and mitigation purposes.

15. Dissolved Oxygen Data: We recommend that USACE provide the data and model outputs to the federal and State agencies in binary files which the models can easily produce. This will allow review of the data in the detail that is appropriate.

RESPONSE: The Corps believes that we have provided all the technical modeling information that you and the States have requested. If that is not the case, please let us know. If that is the case, please let us know when your review will be complete.

16. Monitoring Period: Five-year monitoring during construction and 5 years of post construction monitoring should be adequate, as long as the adaptive management approach and the mitigation methods are working. If there is a problem or issue with the proposed mitigation in that it's not working appropriately then additional monitoring may be needed after the mitigation methods are updated.

This issue appears resolved at this time.

RESPONSE: The Monitoring and Adaptive Management Plan (Appendix D in the 90% version of the DEIS) describes how additional monitoring would be performed if an adaptive management measure is implemented.

17. New Work Sediment Monitoring: EPA would like to review the 2-year monitoring plan for placement of sediments in the near shore area. Additionally, if any material is to be taken offshore for placement in the Savannah ODMDS, it must go through established procedures under the MPRSA and EPA's Ocean Disposal Criteria, and there must be documented demonstration of compliance with the Ocean Dumping Criteria, including a MPRSA Section 103 Evaluation and written concurrence from EPA for disposal in the Savannah ODMDS.

This issue is partially resolved.

RESPONSE: The monitoring plan will be included in the DEIS. It will focus on identifying movement of the deposited new work sediments. The placement plan does include some deposition within the ODMDS. The DEIS will contain a Section 103 Evaluation.

18. Magnitude Factor: Please refer to EPA's response to issue #7.

RESPONSE: The Corps is glad to hear EPA's concurrence that a correction to the SOP to address the scope of the impacts (a "magnitude factor") is not needed. The Corps will show this issue as "Resolved".

19. Economic Analysis: This is not a technical issue but rather a NEPA requirement of disclosure. EPA said at the AFB meeting that we had questions about the clarity of the rationale and as did the Corps' headquarters staff. EPA has not been provided any additional data to review at this time.

Resolution is uncertain.

RESPONSE: The economic work is still underway. We will provide that additional information to EPA when it becomes available.

20. Speece Cones: EPA is awaiting receipt of a final report. EPA's technical position is that the Speece Cones may work but we are unsure how effective they will be in a tidal system. Note that EPA, the States and dischargers are also looking at oxygen injection systems as a wastewater treatment alternative, and based on the available data on the O2 injection systems we can expect 75 to 80 percent transfer efficiency. Again for proper evaluation of the USACE proposed O2 injection system there are additional details that need to be identified (e.g., where the injectors are located, at what depth and with what kind of diffuser pipe). All these variables must be evaluated for all the alternatives.

Additional coordination is needed after receipt of the USACE technical analysis and the modeling scenarios of the potential alternatives with and without the O2 injection. In addition, the Corps needs to address in the DEIS the legal mechanism that will be used to ensure that, if O2 injection systems are put in place, they will be properly operated and maintained in perpetuity. The proposed TMDL will allow the dischargers to lower the DO in the system up to 0.1 mg/l, compared to the 0.8 mg/l impact they are presently causing. The proposed deepening without the O2 injection will lower the DO in the harbor approximately 1.0 mg/l, therefore if the oxygen injection systems are not kept in operation serious water quality issues will occur.

This issue is unresolved at this time.

RESPONSE: The data which the manufacturers have provided the Corps indicate a much higher on the transfer efficiency rate than that cited by EPA. We would like to review the information you have on the efficiency of these D.O. injection systems.

The details of the D.O. systems that you request are normally detailed design information that is developed during preparation of contract plans and specifications. If you have specific guidance for the Corps on specific locations, depths and type of injectors, please let us know. The EPA 3-D models that we all agreed were sufficient for impact and mitigation purposes do not require or provide the level of detail you have identified for their calculations on the effects of the proposed D.O. addition.

21. Air Quality – This is a concern regarding direct and indirect impacts of port expansion. EPA requests a detailed quantitative analysis for the DEIS of the impacts of port expansion on criteria air pollutants.

Region 4 continues to encourage the Corps to include in the DEIS an evaluation of the potential local impacts of the proposed actions associated with air toxics – both during construction and associated with operations of the port. This evaluation should follow the tiered risk-based approach outlined in the Air Toxics Risk Assessment Reference Library, Volume 1, Section 3.3.3 (http://epa.gov/ttn/fera/risk_atra_main.html), including a detailed emissions inventory of mobile and stationary sources of air toxics at the port followed by dispersion modeling and evaluation of the potential health impacts. The DEIS should also address alternatives to mitigate potential impacts of air toxics during construction and operation. This process was carried out for an expansion effort at the Port of Los Angeles and is provided here as an example: (http://www.portoflosangeles.org/EIR/ChinaShipping/DEIR/deir_china_shipping.asp).

RESPONSE: Appendix K of the 90% version of the DEIS contain an Air Emission Inventory that we prepared at the request of EPA. That analysis includes an identification of the amount of air toxics that would result With and Without the proposed project. At your request we expanded an initial version of that analysis to include air emissions in the port that are not affected by the proposed action. That additional information provides a context from which one can judge the effects of the proposed action on the overall emissions in the harbor and the County. Since our analyses show that emissions would decrease if the harbor is deepened (With vs. Without Project), we do not believe that dispersion modeling and evaluation of the potential health impacts are warranted. Similarly, since overall air emissions, including air toxics, would decrease if the harbor is deepened (when compared to the Without Project condition), we do not believe that any mitigation is warranted.

General Technical Comments

A. USACE, EPA and States of Georgia and South Carolina, along with the other Federal Agencies jointly developed and/or reviewed the data and modeling on which the deepening water quality analyses are based. This culminated in a January 2006 data and modeling report that used 1999 as a critical condition (low flow and high temperature) year. All agreed that the 2006 model and data report were adequate to make initial screening projections and evaluations

of the potential deepening alternatives; however now we have new low flow data for 2007/08 which must be considered in the alternatives analysis.

RESPONSE: As you stated, the agencies agreed to use 1999 as the critical condition for water quality analyses. If your agency has new additional requirements, please let us know what you need. While the present drought is worse than 1999 in some portions of the basin, the effect has not been uniform throughout the basin. Conditions in the harbor have not been nearly as severe as those in the upper basin. The drought is not yet over, so if one wants to look at the drought of record for a certain location (would that be the harbor or the river), we would need to wait until the drought is complete to be able to fully assess the effects of that once-in-a-lifetime event.

B. EPA agrees that a reasonable suite of port expansion depth alternatives are being addressed. However, EPA wishes to stress the importance of a comprehensive alternatives evaluation of potential port sites in the DEIS. The site selection criteria need to be equal across all alternatives in order to compare sites objectively. There should not be a presumption that the Savannah River would be deepened to Garden City in the evaluation of potential sites down-river.

RESPONSE: EPA approved the Formulation of Alternatives Report prior to the public release of that document in May 2005. That document contained our detailed analysis of potential alternatives to address the navigation problems occurring in Savannah Harbor. We included that information in the 90% version of the Draft GRR, which EPA reviewed. If you now believe that site selection criteria are not equal across all alternatives, please let us know the specifics behind that concern.

The Corps does not presume that the Savannah River would be deepened to Garden City in our basic evaluation of potential sites down-river. Our Without Project assumption is that the navigation channel would remain as it presently exists and continue to be maintained at its 42-foot authorized depth. The 2005 Formulation of Alternatives Report concluded that deepening to only a new terminal located downriver, such as one in Jasper County, was not the most economically efficient means of addressing the harbor's navigation problems. The sensitivity analysis that we are now conducting of a potential terminal in Jasper County will identify the effects that a new terminal downriver could have on the Federal decision to deepen to the Garden City Terminal. As such, it does assume that someone other than the Federal Government would construct a new terminal after we deepen the channel to the Garden City Terminal. The analysis would identify how sensitive the economic justification of the Federal decision is to a range of potential future actions of others.

CESAS-PM-C

August 21, 2009

Memorandum for Record

Subject: Savannah Harbor Expansion Project: Executive Steering Committee Meeting, August 20, 2009.

1. The fourth Savannah Harbor Expansion Executive Steering Committee Meeting was held on August 20, 2009, at the Georgia Ports Authority offices in Garden City (Savannah), Georgia. In attendance were: Gen. Todd Semonite, Col. Ed Kertis, Wilbert Paynes, Jason O'Kane, Sharon Haggett, Bill Bailey, Paul Bradley, Pete Oddi, Curtis Flakes (USACE); Stan Meiburg, Jim Greenfield and Heinz Mueller (US EPA); David Bernhart (NOAA Fisheries); Patrick Leonard, Jane Griess and Ed EuDaly (USFWS); Steve Green, Jamie McCurry and Hope Moorner (GPA).
2. The meeting was opened with introductions and welcome by Col. Kertis. He also emphasized the need to work toward resolution of issues as much as possible. Gen. Semonite discussed the benefits of this vertical interagency team, how he was pushing for an expedited Civil Works process, and his desire for us to identify any outstanding issues now rather than later. He closed by stating the need for timely deliverables by everyone.
3. David Bernhart stated the quarterly meetings helped to focus on the project considering all of their other competing priorities. Leonard Patrick stated he was new to this group and would be representing the new Regional Director, who had another commitment, for the day. He also added that former Regional Director Sam Hamilton had recently been promoted to the National Director of USFWS. EPA mentioned that they would probably never have the project approval authority delegated to their Regional office.
4. Jason O'Kane reviewed the agenda and discussed outstanding tasks from the April 30, 2009, meeting. Bill Bailey then began a review of environmental issues and their status. As Mr. Bailey reviewed the goals of this group, Col. Kertis stated the intent of the group should be to resolve as many issues as possible prior to the first official comment period, with no new issues being raised from this point forward.
5. Mr. Bailey stated that after the 10 August site visit, EPA expressed concern about the nature of the habitats expected at the proposed marsh restoration site (1S) and that occurring at the impact site (whether it would be in-kind mitigation). He expects this comment would be resolved once the habitat types (brackish marsh) and proximity (1.2 km) were better explained.
6. There was discussion about the acceptable level of monitoring of the cadmium disposal areas. The Corps stated the latest draft disposal plan would be provided to the agencies by approximately August 28 for review. EPA reiterated their desire that the

Corps describe how long term operation of the site would ensure the cadmium doesn't leave the site. The Draft EIS will address this issue.

7. Discussions continued regarding Shortnose Sturgeon modeling habitat criteria – the Corps would coordinate with the Fisheries Interagency Coordination Team concerning proposed (NOAA Fisheries-approved) revisions to the SNS habitat criteria.

8. It was discussed that the Corps would ensure the Draft EIS includes the information required proposals by the new “mitigation rule” in Section 404 Regulatory permit program for mitigation banks.

9. On air quality, Mr. Bailey stated that since the project would result in fewer (but larger) container ships calling at the port, long term air emissions would be reduced as a result of the project. Temporary increases in emissions would result from the dredges that deepen the river and implement that mitigation. The Corps did not believe that a dispersion analysis was required because the additional air pollutants would be temporary (occur only during construction), would be mobile (move along the river for dredging), and would already be distributed along the 36 miles of channel to be dredged as the dredge moved to deepen then entire length of channel. The increased emissions would also be only a small increase when compared to the existing emissions in the County, which is an Attainment area. EPA stated they disagreed and although the effects may be negligible, the dispersion analysis/modeling was a relatively easy process to verify this assumption. The Corps agreed to pursue the dispersion analysis and EPA agreed to assist.

10. EPA is still reviewing the Sediment Quality reports. They agreed to provide a status on their review at the next ESC meeting.

11. Mr. Bailey explained the various issues with the monitoring and adaptive management plan and that we were reviewing NOAA Fisheries recent comments on the plan. The Committee discussed including identifying impact thresholds that would trigger certain mitigation actions, but they recognized that it would be problematic to determine what factors or resources would be measured for such a complicated system and project. They also discussed the fact that adding costs for any possible adaptive management measure regardless of the likelihood of occurrence increases the cost of the project and hurts the benefit to cost ratio. Typically, mitigation costs are 2% of project cost, with 10% being considered high. The mitigation costs for this project now range from 33 to 50% of the total project costs. This does not in itself make the project unacceptable, but makes it very important that the report clearly state why each mitigation expense is required and the best value to offset the environmental impact. At some point, the congressional legislative process should be considered the mechanism to correct any severe unforeseen environmental impacts.

12. Wilbert Paynes explained we were working with Headquarters USACE to identify how we could, or if we could, assure O&M funding for the project's mitigation features such as the dissolved oxygen injection systems.

13. Curtis Flakes reviewed the status of the economic analysis. NOAA Fisheries, David Bernhart, agreed to find out who within the Department of Commerce or NOAA would be concerned with evaluating the commercial navigation aspects of the project. We agreed to carefully consider that person's involvement before an effort was made to engage their interaction.

14. Mr. O'Kane reviewed changes to the schedule since the April 30, 2009 ESC meeting. The agencies expressed concern that the period for their review of the documents prior to public release of the reports had been reduced from 60 to 30 days. The Corps agreed to investigate providing components of the environmental documents earlier to effectively provide the agencies with more review time.

15. The Corps agreed to draft a proposed approval process for coordination among the other agencies at the next ESC meeting.

16. It was suggested we hold the next Executive Steering Committee meeting November 9, 2009, in Atlanta at the USACE's CESAD office.

-- DRAFT --

Jason O'Kane
Project Manager

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project (SHEP) Executive Steering Committee Meeting, 9 November 2009.

1. The fifth Savannah Harbor Expansion Executive Steering Committee Meeting was held 9 November 2009 at the US Army Corps of Engineers (USACE), South Atlantic Division, downtown Atlanta, Georgia. In attendance were: BG Todd Semonite, Les Dixon, COL Edward Kertis, Wilbert Paynes, Jason O'Kane, William Bailey, Pete Oddi, Todd Boatman, Daniel Small, Jeff King (USACE); Stan Meiburg, Heinz Mueller, Jim Greenfield (EPA); David Bernhart (NOAA Fisheries); Jack Arnold (USFWS); Gregory Hogue (Department of the Interior); Doug Marchand, Steve Green, Jamie McCurry and Hope Mooror (GPA). Action items are underlined to aid identification.
2. The meeting was opened with introductions and welcome by BG Semonite. Jason O'Kane discussed action items still pending from past meetings. Mr. Bill Bailey then presented an update on environmental issues.
3. It was agreed that USACE will coordinate a meeting with EPA regarding assurances for the Dissolve Oxygen (D.O.) mitigation. The goal would be to determine some minimal level of D.O. mitigation (D.O. injection). Corps representatives at the meeting did not think absolute assurances could be given on funding. Meeting should include necessary Programs and Operations staff.
4. It was agreed that USACE will coordinate a meeting with EPA regarding air quality. The resolution from this meeting would also be covered in the 21 Dec 09 monthly SHEP IPR.
5. It was agreed that the USACE will coordinate a meeting with the USFWS regarding monitoring for cadmium, physical vs. biological, and present the outcome at the next ESC meeting. One idea was offered that we perform physical testing until some predetermined level is found that would then trigger biological testing.
6. It was agreed there would be a 16 Dec 09 meeting between the USACE (Mr. Steve Calver) and EPA to discuss EPA's sediment quality analysis. Freshwater marsh impacts from the project will also be discussed at this meeting.
7. Agencies were reminded that a large portion of project costs are mitigation; thus increasing the need to clearly justify all costs. The agencies agreed to support the USACE in the justification of all mitigation and its adequate documentation.

8. Mr. O'Kane presented an update on the project schedule and an engineering update. It was discussed that the agency will be asked for input for two Federal Principles meetings in the Washington, DC, area with invitations going out at the regional Senior Executive Service level, one for the Senior Leaders Panel and one for the Civil Works Review Board. Current scheduled dates for these and other important milestones to the agencies would be sent out by the USACE later in the week.

9. An economics update was presented by Mr. Bernard Moseby. He discussed the ongoing modeling, benefit calculations, (USACE) technical review of the partial products, primary issues we are working to resolve, sailing draft distributions and data averaging. These factors effect benefit calculations. Mr. Steve Green added that these issues, along with the feasibility of using tides into the future, are the main GPA issues also at this point. The USACE agreed to provide an estimate of the additional work required to resolve recent concerns and updated schedule by 13 Nov 09.

10. NOAA Fisheries, David Bernhart, recommended the USACE perform a Right Whale analysis in conjunction with our other channel design investigations and include the finding with the EIS. He recommended using the same team as other recent similar analysis for other harbors such as Jacksonville. The USACE agreed to perform a Right Whale analysis.

11. It as agreed the USACE would provide an update on the Sea Level Rise Engineering Circular at the next meeting.

12. It was agreed that the USACE would work with NOAA to refine the completion of their Biological Opinion prior to any major meetings or decision points such as the Senior Leaders Panel.

13. It was agreed we hold the next Executive Steering Committee meeting would be held on 26 Feb 09 in Atlanta at the USACE CESAD office.

Jason O'Kane
Project Manager



UNITED STATES DEPARTMENT OF COMMERCE
National Oceanic and Atmospheric Administration
 NATIONAL MARINE FISHERIES SERVICE

Southeast Regional Office
 263 13th Avenue South
 St. Petersburg, FL 33701-5505
 (727) 824-5312, FAX 824-5309
<http://sero.nmfs.noaa.gov>

F/SER31: KBD

FEB 4 2010

William Bailey
 Savannah Unit Chief
 Mobile-Savannah Planning Center
 Savannah District, Corps of Engineers
 P.O. Box 889
 Savannah, GA 31402-0889

Dear Mr. Bailey:

This is in response to your letter received by the National Marine Fisheries Service (NMFS) on December 9, 2009, regarding your rationale for selection of a preferred alignment of the proposed ocean bar channel extension associated with the Savannah Harbor Expansion Project (SHEP). The extension and alignment are needed to address avoidance of potential shoaling areas located within the present channel alignment that could become problematic with the proposed 48-foot deepening alternative and associated channel extension from Station -60+000B to Station -85+000B (S-1). Your analysis finds that there would be a negligible effect to the North Atlantic right whale (*Eubalaena glacialis*) with the implementation of the re-aligned channel extension (S-8). The channel extension and re-alignment are new features that are being added to the SHEP and will need to be included in the NEPA analysis.

We are providing comments and questions on the analysis for your consideration in finalizing the biological assessment for threatened and endangered species and draft Environmental Impact Statement, which will provide the basis, in part for our biological opinion for SHEP. In our biological opinion, we will analyze the project impacts to right whales, including the proposed alignment and location of the channel extension, and will conduct a review of the data on the number of transits to and from the port by cargo vessels. Usage of the channel and adjacent area by other vessels associated with SHEP and the port (e.g., construction vessels, pilot boats, and dredges) will also be analyzed. We will also look at effects from dredging and construction activities. These data will be used to determine the risk to individual whales and then right whales as a population, based on our knowledge of right whale usage of the action area and the expected direction of ship traffic. When information is unknown or in doubt we will err on the side of the species. Until we receive a specific request for consultation with an effects



determination for federally-listed species including the endangered North Atlantic right whale, we offer this initial response to your analysis.

Questions about analysis

1. For your analysis, you assume that a hopper dredge with a capacity of 3,600-4,000 CY would most likely be used during the dredging of the channel extension. You also state that the range of hopper dredge volumes that may be used is as small as 2,000 CY. Unless such a small dredge is unrealistic, would it not be more conservative to conduct the analysis assuming smaller dredges with more transits?
2. The report states the project is likely to take anywhere from 9 to 26 months. Could the timing of construction activities be structured to avoid calving seasons?
3. Where is the "placement area" that is referred to in the comparison of dredge movement distances between the S-1 and S-8 bar channel alignments?
4. It is unclear how much longer the channel will be or how much farther offshore the pilot boarding area will be located. Could a clearer map or shapefile be provided that shows these areas?
5. How will a channel extension affect harbor pilot operation? What is the frequency of trips to the boarding area and how fast does the pilot boat travel to and from its destination?

Specific comments

- We know ship collisions are one of two primary human-induced sources of mortality in right whales. The number of documented deaths may be as little as 17% of the actual number of deaths (Kraus et al., 2005). Additionally, when right whale carcasses are discovered, the location represents where the carcass was discovered and not where the mortality occurred. Therefore, no reports of right whale ship strikes in the Savannah area does not mean the approach and departure vectors are aligned to minimize risk to right whales from ship strikes or that right whales have not been ship struck in that area.
- Garrison's analysis did not include air survey data from the upper coast of Georgia and lower South Carolina coast; these data should be included when considering the Savannah area. Without looking at those data, we don't know if right whale distribution there is even or clumped (i.e., S-8 or S-1 alignment may/may not funnel traffic over an area with a higher occurrence of right whales).
- Speed restrictions to protect North Atlantic Right Whales (50CFR224.105) will only be a temporary protection measure because the speed rule is effective only through Dec. 9, 2013, but the channel will be long-lasting/permanent.
- Aerial surveys in Savannah are not considered "Early Warning System" surveys because surveys over Savannah are flown too infrequently.

The risk of collision with ocean-going vessels is a continuing challenge to the recovery of the endangered North Atlantic right whale. Perhaps less than 400 individuals remain. NMFS is concerned that much of their habitat coincides with areas of high commercial shipping traffic (Ward-Geiger et al. 2005), which includes areas located offshore of the Georgia coast and the Savannah Harbor. In order to protect the few remaining individuals, it is critical that measures be taken to avoid often fatal collisions with ships.

We thank you for the opportunity to provide these comments and look forward to further cooperation with you on this project to ensure the conservation of our threatened and endangered marine species. If you have any questions, please contact Barb Zoodsma at (904) 321-2806 and by e-mail at Barb.Zoodsma@noaa.gov or Kay Davy at (954) 356-6791 and by e-mail at Kay.Davy@noaa.gov.

Sincerely,



David M. Bernhart
Assistant Regional Administrator
for Protected Resources

File: 1514-22 f. 3

CESAS-PM-C

2 April 2010

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project (SHEP) Executive Steering Committee Meeting, 2 April 2010.

1. The sixth Savannah Harbor Expansion Executive Steering Committee Meeting was held 2 April 2010 at the US Army Corps of Engineers (USACE), South Atlantic Division, downtown Atlanta, Georgia. In attendance were: MG Todd Semonite, Les Dixon, Col. Edward Kertis, Wilbert Paynes, Jason O'Kane, William Bailey, Pete Oddi, Curtis Flakes, Todd Boatman, Daniel Small, Terry Stratton, Dylan Davis, Jeff King (USACE); Miles Croom (NMFS), Stan Meiburg, James Giattina, Jim Greenfield and Heinz Mueller (USEPA Region 4), Gregory Hogue (Department of the Interior), and Mark Musaus and Jack Arnold (USFWS). Action items are underlined to aid identification.
2. The meeting was opened with introductions and welcome by MG Semonite and Col. Kertis. Jason O'Kane discussed action items still pending from past meetings. Discussion indicated there was still uncertainty about the proposed approval project for purposes of both the final report and the conditional authorization. It was agreed the next ESC would include a summary of the approval process. The agencies express gratitude for the 26 Mar 10 meeting and site visit to the disposal areas hosted by the Savannah District USACE.
3. The disposal plan for the cadmium-laden materials was discussed. USFWS agreed they were developing an agency position and would provide comments to the Corps as early as possible. Of most concern were any possible high concentration "hot-spots" that may exist in the materials and are the cap cadmium levels low enough. They advised it may be submitted as part of their comments on the draft EIS. MG Semonite asked that a course action leading to resolution be clearly identified by the 27 May 10 Senior Leaders Panel (SLP) so that this could be considered an issue on its way to being resolved.
4. It was agreed the fleet forecast was necessary to further discuss the impacts on air quality impacts. Heinz Mueller added that EPA would be expecting a Tier I or inventory air quality analysis even if impacts with the project were less than the without project condition. Wilbert Paynes asked for clarification on this point and Stan Meiburg restated the need and explained that recent changes to the air quality standard and the fact that any change would be occur both made the analysis necessary. It was agreed this would be further discussed at the technical level.
5. Dr. King stated that the project had been give guidance that post-construction monitoring and adaptive management would be funded through the Corps normal budget process. Mr. Stan Meiburg stated this was of great concern, and several other agency

representatives agreed, since the normal budget process doesn't guarantee or even reasonable assure funding. Mr. Les Dixon restated that the normal budget process is all we could offer and MG Semonite asked what other options were available. Hope Moorer asked would it be possible for the sponsor to set aside creditable funds for this purpose. Mr. Les Dixon and Mr. Wilbert Paynes both agreed it likely was possible but were not sure of the exact mechanism. Mr. Curtis Flakes agreed that Mobile Planning would research how the sponsor could set aside creditable funds for post-construction monitoring and adaptive management and feedback would be provided back to the group and GPA by 1 May 10.

6. Mr. Jack Arnold also added to the post-construction monitoring and adaptive management discussion that the triggers for additional monitoring or adaptive management were poorly define. Dr. King responded that the draft EIS would include an updated monitoring or adaptive management plan with more clearly defined triggers for their review and comment.

7. Mr. Bernard Moseby gave an update on the economics analysis. It was agreed the agency representatives would be notified by phone calls when we have identified the NED.

8. Mr. O'Kane provided the Engineering update including the work to assure the report clearly complies with all sea level rise guidance. The importance of agreement on a clear and concise path forward as a result of the sea level rise meeting on 6 Apr was stressed.

9. Agencies agreed to keep 13 May 10 ESC meeting as scheduled to allow for a huddle prior to the 27 May 10 SLP in Washington DC.

10. In the closing remarks, it was asked by the agencies if we could just remove the New Savannah Bluff Lock and Dam rather than constructing the fish by-pass structure. It was stated by the Corps that this was not possible due to legislation that requires the rehabilitation and turn-over to the City of North Augusta pending the availability of funds.

11. MG Semonite re-emphasized the sensitivity and preliminary nature of any documents or information we shared with the agencies and asked they do not share it outside their organizations.

DRAFT

Jason O'Kane
Project Manager

CESAS-PM-C

17 September 2010

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project (SHEP) Executive Steering Committee (ESC) Meeting, 17 September 2010.

1. The seventh Savannah Harbor Expansion Executive Steering Committee Meeting was held 17 September 2010 at the US Army Corps of Engineers (USACE), South Atlantic Division, downtown Atlanta, Georgia. In attendance were: MG Todd Semonite, Les Dixon, Col. Edward Kertis, Wilbert Paynes, Neil Purcell, Daniel Small, Dylan Davis, Cole Gatwood, Pete Oddi, William Bailey, Alan Garrett, Sharon Haggett, Jason O'Kane, Curtis Flakes, Todd Boatman, (USACE); Miles Croom (NMFS), Stan Meiburg, Tom Welborn, Bill Melville and Heinz Mueller (USEPA Region 4), Joyce Stanley (Department of the Interior), Mark Musaus and Jack Arnold (USFWS), Hope Moorer, Jamie McCurry Steve Green, Alec Pointevint and Curtis Foltz (GPA). The sign-in sheet it attached for reference. Action items are underlined to aid identification.
2. The meeting was opened with introductions and welcome by MG Semonite and COL Hall. It was noted this was COL Hall's first ESC since taking command of the Savannah District in June 2010. MG Semonite summarized the progress that has been made to date. He continued by discussing the collaboration that has taken place and will continue to occur between the cooperating Federal Agencies on the SHEP. The recent arrival of the Figaro, the largest container vessel to call at the Port of Savannah, was discussed. Mr. Curtis Foltz, Georgia Ports Authority (GPA) Executive Director reiterated how the vessel was extremely light loaded and still required an 18 hour delay due to tidal restrictions which were further hampered by inclement weather conditions, a common afternoon thunderstorm.
3. Ms. Sharon Haggett then presented the project status update as outlined the attached presentation. Mrs. Haggett reviewed the internal USACE review process including District Quality Control (DQC), Agency Technical Review (ATR) and Preliminary Independent External Pier Review (IEPR) that has taken place since the last ESC meeting conducted 2 April 2010. This included a brief summary of the comments, resolutions and the associated documentation of the process. Ms. Haggett also indicated some of the economics comments were elevated within the USACE for resolution.
4. Economics Summary: Mr. Bernard Moseby, USACE lead economist, indicated that the likely resolution of the remaining comments would require that the USACE vertical review teams, including the Office of Water Policy Review, agreed to disagree on approximately 3 of the 13 open comments. The remaining 10 open comments will reach resolution when the reviewers are able to see the full response in the report which was expected soon. Generally, the recommendations from the open comments do not affect the selected plan.

Economic Taskers:

- a) MG Semonite tasked the vertical team (Mr. Paynes) to facilitate resolution of the outstanding Economics comments within two weeks.
- b) MG Semonite commented on the outstanding economics modeling comments and requested that all comments be provided to and coordinated with GPA

5. Engineering Summary: Ms. Haggett summarized the Engineering comments indicating that the GRR/EIS package submitted incorporated all but the Costs comments. The resolution of the cost comments has been completed and submitted to OWPR for review as of the 14 September. In summary, the Cost changes required by the ATR resulted in a decrease of 0.15% in the Total Project Costs at the mid-point of construction across all alternatives. It was concluded that these changes do not affect the NED Plan identification or any other project decisions, are insignificant and will be incorporated prior to public review. There were no Engineering taskers.

6. Environmental Summary: Ms. Haggett summarized the Environmental Impact Statement review comments indicating that all were addressed and closed. The ESC discussed the funding of Monitoring and Adaptive Management and Ms. Moorer from GPA articulated the GPA position on providing an assurance and escrow of non-Federal funds to perform Monitoring and Adaptive Management. ESC attendees understand that USACE is not allowed to escrow Federal funds but that there is nothing prohibiting the non-Federal sponsor from escrowing their portion of funds needed for Monitoring and Adaptive Management. This will be captured in the Project Partnership Agreement when it is prepared for execution.

Environmental Tasker: Ms. Moorer (GPA) will provide a letter to USACE articulating the GPA's position that they are willing to establishing a non-Federal escrow account for the non-Federal portion of the Monitoring and Adaptive Management costs.

7. Schedule Review: Ms. Haggett reviewed the overall Project Schedule indicating the date for the CWRB and ROD had moved forward as a result of guidance received from OWPR and HQUSACE following the 27 May 2010 Senior Leaders Panel. In accordance with Section 2033(g) of WRDA 2007, the ASA (CW) has 120 days after the date of completion of a Chief's Report to review the report and provide any recommendations of the Secretary regarding the water resources project to Congress. Also, per the FY08 Consolidated Appropriations Act, OMB has not more than 60 days in which to perform budgetary policy reviews of water resource matters on which the Chief of Engineers has reported.

Schedule Tasker: MG Semonite tasked Mr. Paynes with providing source of the above guidance to Ms. Moorer with GPA within two weeks. COMPLETED - Mr. Paynes provided the information above before the ESC meeting concluded.

7. Others and Mr. Stan Meiburg discussed how mitigation for freshwater marsh was to account for sea level rise and how the low/historical rates of rise were considered the most likely future condition for impact calculations. Mr. Les Dixon mentioned that discussion within the USACE were still on-going as to how to incorporate sea level rise and one concern was that if sea level rise was greater than the historical rate, how would the project's over mitigation be handled. Mr. Hope Moorer asked that all Federal cooperating agencies be involved in the discussions and Mr. Dixon assured that they would continue to be included.

8. Mrs. Haggett stated that the USACE has investigated funding assurances for post-construction monitoring and adaptive management and that the USACE policy as a Federal Government agency, prohibits the escrow of any funds for future purposes. However, it is possible for the sponsor to escrow such funds to assure their non-Federal portion would be available. MG Semonite asked if GPA has agreed to escrow their non-Federal funds for this portion of the project. Ms. Moorer and Alec Pointevint agreed that GPA would be willing to fund such an escrow account. Mr. Mark Musaus stated that USFWS was pleased with this commitment but it still concerned based on the time it has taken for mitigation for past Savannah Harbor deepening project's, the on-going freshwater control structure rehabilitation, to occur.

9. Mrs. Haggett reviewed the schedule changes that had occurred since the last ESC meeting, 2 April 2010. The overall project schedule was shown along with agency interaction points. Mr. Pete Oddi summarized these changes as the additional time required for the economic analysis and increased durations for the USACE Civil Works process reviews for good faith and transparency. Increased review durations show those required by statute and not the optimistic dates used in the 2 April 2010 ESC schedule. MG Semonite asked the cooperating agency staff if they could support this schedule. David Bernhart said that NOAA Fisheries could meet these dates for their Biological Opinion (BO) if their preliminary comments were resolved prior to public review. However, he was concerned as some of these comments are very substantial.

10. MG Semonite then asked the agencies to brief slides summarizing their preliminary draft comments.

11. Mr. David Bernhart stated that they understood that the channel extension was a relatively new component of the project that they were still working to fully evaluate. Mr. Bernhart also stated that the issue of nearshore and offshore dredge material placement offshore dredging and how it would be covered under SHEP or the programmatic agreement permit for dredging was still on-going. Under the permit is usually preferred, but in this case it that creates some problems such as the BO being several years old. Mr. Bernhart stated that authorization should be sought in the SHEP EIS/BO. Mr. Bernhart also added that Shortnose sturgeon would be impacted by SHEP through habitat changes and they have been working with the modeling efforts and how outputs are displayed. Model outputs still need to be shown in a better way to meet their needs for the BO. It was added that they would like to see more detailed plans of the fish-bypass at the New Savannah Bluff Lock and Dam and maintain that removal of this structure is a better

alternative in the long run. They would also like to see additional detail in the monitoring and adaptive management plan included the identification of triggers and the corresponding corrective measures.

12. MG Semonite asked Mr. Bill Bailey to briefly summarize the Corps response. Mr. Bailey responded to some of the comments and it was agreed the technical staff would meet to discuss.

13. Mr. Mark Musaus stated they still prefer the -45-foot alternative and agreed a GPA escrow as a good step. Mr. Jack Arnold added that they are concern about greater impacts to wetlands than anticipated as a result of model limitations. In particular, concerns of the conversion of ecologically diverse tidal freshwater marsh to monotypic stands of Spartina.

14. MG Semonite asked how a compromise on depth be achieved. Mr. Curtis Foltz and Mr. Steve Green stated that they understood the on-going freshwater control structure rehabilitation work was to help resolve some of the concerns with the -48-foot alternative through discussions with the former US Senator Mack Mattingly and the late Sam Hamilton. Mr. Mark Musaus stated that the rehabilitation was just to get to where they could considering the SHEP project. Ms. Hope Moorer reminded everyone that the -48-foot alternative net benefits were only $\frac{1}{4}$ of a percent less than -47-foot alternative and that there were greater benefits at 48'. Mr. Jamie McCurry added that the benefits of the Port are National just like the benefits of the Savannah National Wildlife Refuge. MG Semonite stated the importance of going into the Civil Works Review Board with a plan all could support. Mr. Bailey added that the USFWS seems to be willing to support the NED Plan but there are still several questions outstanding that could alter which depth is the NED Plan. Mr. Bailey asked the USFWS if they would object if the Corps sent out the draft reports for public comment recommending the -48-foot LPP. Mr. Musaus stated they would not oppose that.

16. Mr. Stan Meiburg compliment the Corps for the work to date but stated that their issue with dissolved oxygen is not new and added that EPA's policy for wetland preservation at a given ratio is not being met with this mitigation plan, that they still had concerns that sufficient air quality analysis had not been shown, for example the impacts from vessels, trucks and other equipment operating, that other impacts would be of great concern to the public such as those to noise, and that long term funding for mitigation features and sea level were uncertain factors that create concern from both sides. Mr. Bill Bailey responded that it was important to understand the with and without project conditions and that additional discussion would be held to resolve the issue.

17. The agency approval process was discussed, working towards the CWRB where agencies would verbally provide their agency positions. Mr. Stan Meiburg stated it would be hard to approve a project when you don't know how comments have yet to be addressed and the proposal is not final. MG Semite asked the team (PM-C, O'Kane) work to reword the approval process and determine how some time for approval can be worked in.

18. The dates for future ESC meetings were reviewed. MG Semonite asked the team (PM-C, O'Kane) to look at moving the 16 December 2010 date back and consider holding it by VTC. He also directed the team to keep the CWRB on 17 March 2011 even if just another Senior Leaders Panel with possibly the ASA (CW) or Chief of Engineers attending for special attention.

19. Mrs. Sharon Haggett reviewed that all action items from the previous ESC were completed. MG Semonite asked that PM-C (O'Kane) brief the status of each agency issue at the USACE 18 October In-Progress Review and coordinate the schedule with the FWS.

20. Curtis Foltz expressed disappointment in seeing the new extended Record of Decision date, driving out the time at which economic benefits to nation would be realized from the project. MG Semonite stated he understand the frustration but added that Savannah is at front of line for deepening and further along than any other port and that these SHEP ESC meetings are a template for how future Corps projects will be collaborated with the agencies.

FINAL

Jason O'Kane
Project Manager



US Army Corps
of Engineers

Project: Savannah Harbor Expansion
Meeting/Location: ESC/SAD Atlanta and VTC
Date: 17-Sep-12

	Name	Organization	Title	Phone	Email Address
(1)	Sharon Haggitt	Savannah Corps PM - CM	Project Mgr	912-552-5188	sharon.haggitt@usace.army.mil
(2)	Dylan Lewis	USACE-SAD	Asst Program Mgr	404-562-5188	dylan.lewis@usace.army.mil
(3)	Joyce Stanley	DERC-DOI	REPA	(404)-454-4544	joyce.stanley@ios.doi.gov
(4)	William Bailey	Savannah Corps Planning	Chief, PD	912-632-5781	
(5)	Hope Mosser	GPA	GPA	912-944-3883	hmosser@gaparts.com
(6)	Janie McCurry	GPA	Director of Admin	912-944-3883	jmc Curry@gaparts.com
(7)	Steve Gaceen	GPA	GPA Branch	912-944-3883	stgaceen@gaparts.com
(8)	Christa Folte	GPA	Exec Director	912-944-3883	cfolte@gaparts.com
(9)	Pete O'Day	USACE-SAD	ISPM	912-552-5392	pete.oday@usace.army.mil
(10)	Col Jeffery	USACE SAS	Director Planning	912-652-5781	jeffery.m.hall@usace.army.mil
(11)	Alce Ginter	GPA	Chairman	912-944-3883	alce.ginter@usace.army.mil
(12)	CG				
(13)	KE'S DIXON	USACE-SAD	DIR PROG	512-552-5188	KE'S.DIXON@usace.army.mil
(14)	MARK MUSAU	FWS	Dep. Regional Director	677-4400	mark.musau@fws.gov
(15)	Jack Arnold	FWS	Regional ES	404-674-7311	jack.arnold@fws.gov
(16)	Tom Wellborn	EPA	Br. Chief	404-562-9354	wellborn.tom@epa.gov
(17)	Wendy Bell	EPA	NEPA Specialist	404-562-9354	wendy.bell@epa.gov
(18)	Stan Meiburg	EPA	Dep. Regional Dir.	404-562-9354	meiburg.stan@epa.gov
(19)	Wilbert V. Payne	USACE	Ch/Plan Div	404-562-5220	wilbert.v.payne@usace.army.mil
(20)	Neil Lussell	USACE	Division Chief	404-562-5015	neil.lussell@usace.army.mil
(21)	Daniel L. Smith	USACE	Br. Chief	404-562-5224	daniel.l.smith@usace.army.mil
(22)	Alan Garrett	USACE-SAS	Program Mgr	912-652-5392	alan.garrett@usace.army.mil
(23)	Col. Ginter	USACE	Observer	603-765-1614	col.ginter@usace.army.mil
(24)	Bill Melville	US EPA	TRAC coord.	404-562-9354	bill.melville@epa.gov
(25)	Joselyn Malandine	USACE	Intern Program	912-944-3883	joselyn.malandine@usace.army.mil

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project (SHEP) Executive Steering Committee (ESC) Meeting, 16 December 2010.

1. The seventh Savannah Harbor Expansion Executive Steering Committee Meeting was held 17 September 2010 at the US Army Corps of Engineers (USACE), South Atlantic Division, downtown Atlanta, Georgia. In attendance were: Stacey Brown, Les Dixon, Col. Hall, Wilbert Paynes, Barbara Altera, Daniel Small, Pete Oddi, Bitsy Sloan, Warren Swartz, Mike Saltalamachea, William Bailey, Alan Garrett, Sharon Haggett, Jason O'Kane, Curtis Flakes, Todd Boatman, Bernard Moseby, Steve Cone (USACE); Miles Groom (NMFS), Roy Crabtree and David Bernhart (NOAA Fisheries), Tom Welborn, and Heinz Mueller (USEPA Region 4), Mark Musaus and Jack Arnold (USFWS), Alec Pointevint, Jamie McCurry, Steve Green, Alec Pointevint and Curtis Foltz (GPA). The sign-in sheet is attached for reference. Action items are underlined to aid identification.

2. The meeting was opened with introductions and welcome by Les Dixon and COL Hall. Les Dixon commended the team on the progress that has been made to date. He continued that this meeting would be to continue that progress and assure all efforts were headed in the right direction. COL Hall agreed and noted the District had awarded the second option on the freshwater control structure contract, which would complete the rehabilitation of all structures on government-owned lands. He also stated we would be granting a 15-day extension to the public comment period by the end of the week and mentioned the public workshop that had been held in Savannah the day before, 15 December 2010.

3. Jason O'Kane then presented the project status update as outlined in the meeting presentation slides. Updates were provided for the Agency Technical Review, Office of Water Project Review and Preliminary Independent External Peer Review progress that has taken place since the last ESC meeting conducted 17 September 2010. This included a brief summary of the review team composition, review comments, resolutions status and the associated documentation of the process. Updates on the ongoing economics, engineering and environmental work were also provided. The agency approval process was reviewed and there was some discussion regarding how the details of the process would work.

4. The meeting was opened for agency comments at this time. USFWS commented that their reviews were continuing and they anticipated having their comment in on time. They voiced continued concern (1) For the Federal funding for monitoring and adaptive management due to the uncertainty of project mitigation, (2) Their desire for 10 years of post-construction monitoring instead of the proposed 5 years, (3) Their desire for more details on the adaptive management implementation details,

5. EPA expressed concerns over, (1) Inadequate wetland preservation, (2) Their desire for more detail in the salt vs. freshwater functional system analysis, (3) Their desire to have the dissolved oxygen mitigation system on-line prior to dredging (Bill Bailey explained this was shown in the construction sequencing plan in the EIS) and (4) Their desire for additional air quality analysis, particularly with regards to toxics. They stated that the Environmental Justice analysis was much improved. EPA also stated they may wish to review the public comments prior to submitting their comments. It was discussed that public and agency comments are due concurrently, so this would need to be planned out if it was to not impact the schedule.

6. NOAA Fisheries expressed concerns over, (1) The adequacy of the information they require to perform their Threatened and Endangered Species impact evaluation and in particular the Shortnose sturgeon habitat suitability criteria used, (2) The interpolated 47' alternative model runs (Bill Bailey explained that the 47' model runs in the draft report were actual and not interpolated). NOAA stated they need to evaluation the latest EIS's 10-knot hopper dredge speed restrictions during construction, (3) The New Savannah Bluff Lock and Dam fish by-pass structure cost is under estimated, (4) Essential Fish Habitat consultation would take additional time beyond that scheduled by several months NOAA Fisheries stated they have not started their Threatened and Endangered Species analysis as they are awaiting adequate information. As a result of this delay, they would not be able to provide their Biological Opinion until several months after the scheduled date of 25 Jan 2011. NOAA Fisheries stated they were working on providing the Corps a description of the information they require to begin their review.

7. COL Hall then reviewed the overall Project Schedule, indicating the date for the CWRB and ROD had moved forward slightly. He also reviewed future agency interaction dates on the schedule. The Federal agency Washington, D.C., Secretary-level meetings that are scheduled for January and February 2011 were also discussed.

8. GPA representatives stated it was our obligation to the American citizens to complete the project and start realizing the significant benefits to the Nation through increased transportation efficiencies. They added that progress needed to continue if we want to make this project's unprecedented level of interagency collaboration appear desirable for similar projects in the future.

9. In conclusion, COL Hall and Les Dixon stated that work would continue as discussed and extended appreciation to all agencies for their continued cooperation.

FINAL

Jason O'Kane
Project Manager



US Army Corps
of Engineers

Project: San Antonio Harbor Expansion
Meeting/Location: ESG/ASD Affairs and VTC
Date: 10-04-10

	Name	Organization	Title	Phone	Email Address
(13)	Dylan Davis	USACE-SAD	Asst. Program Manager	562-52150	dylan.davis@usace.army.mil
(14)	Barbara Altera	CECC-SAD	Asst. Dir. Counsel	562-5017	barbara.b.altera@usace.army.mil
(15)	Alec Costello	GPA	Chairman	202-943-5247	alec.e.costello@usace.army.mil
(16)	Les Dixon	SAD	Asst. Director	562-5240	LESTER.S.DIXON@usace.army.mil
(17)	Col. Jeff Hall	SAS	Brig	912-452-5126	jeffery.m.hall@usace.army.mil
(18)	Pete O'Don	SAS	DDPM	562-5552	PETE.A.ODON@usace.army.mil
(19)	Tommy McQuinn	EPA	Brig	562-5552	tommy.mcquinn@usace.army.mil
(20)	William Melville	EPA	Brig	562-5552	william.melville@usace.army.mil
(21)	Wilbert V. Payne	SAD	Brig Chief	562-5552	wilbert.v.payne@usace.army.mil
(22)	Steve McQuinn	GPA	Brig	562-5552	steve.mcquinn@usace.army.mil
(23)	Jamie McCurry	GPA	Brig	562-5552	jamie.mccurry@usace.army.mil
(24)	Chris Foltz	GPA	Brig	562-5552	chris.foltz@usace.army.mil
(25)	Steve Green	GPA	Brig	562-5552	steve.green@usace.army.mil
(26)	Donald Smith	SAD	Brig	562-5552	donald.smith@usace.army.mil
(27)					
(28)					
(29)					
(30)					
(31)					
(32)					
(33)					
(34)					
(35)					

694

IV. EXECUTIVE MANAGEMENT GROUP

IV. Executive Management Group

1. MFR dated 28 September 2007. SHEP Issue Resolution Conference- Without Project Condition, Thursday, September 20, 2007.

MEMORANDUM FOR RECORD

28 September 2007

SUBJECT: Savannah Harbor Expansion Project; Issue Resolution Conference – Without Project Condition, Thursday, September 20, 2007

1. **Opening Remarks:** Wilbert Paynes (South Atlantic Division) opened the meeting. The primary purpose of the meeting was to hear from the Project Delivery Team in terms of what they have established as the future without project condition and to open dialogue on any specific areas of concern. Mr. Paynes highlighted the importance of ensuring that the vertical team agrees with the direction the PDT is heading because the pace of progress was quickening. He stated that the focus must be on the needs of the team and the specific areas of concern on the without project condition statement such that they can be identified early and allow the PDT to address them.
2. **Overview and status of the project.** Alan Garrett (CESASPM) stated that most of the technical studies are complete, with the exception being those that need to be finalized after we select the mitigation plan. The mitigation plan selection has been an issue over the last two months. The PDT has been trying to model a plan, known as Plan 7, that the agencies had proposed. This past week, a request was sent to the agencies for them to make a decision by 1 October on whether we could proceed with development of the mitigation plans prior to having the modeling results for that Plan, given its forecasted high cost of implementation. The project is at a pivotal point in terms of being able to proceed forward with a selected plan chosen from among the six different plans being considered. The economics team in Mobile District is in the process of finalizing the economic studies. Wilmington District has finished the rough order of magnitude costs with the exception of the mitigation plans. The team expects to wrap everything up around the February 2008 timeframe.
3. **Advance Maintenance.** Lee Ware (HQUSACE) asked about the degree of advance maintenance in some areas and how that relates to operating vessel draft and any risk taking that might be happening. Alan Garrett explained that Savannah Harbor has an annual shoaling of over seven million cubic yards per year. Over the last 20 years, Savannah District has pursued and obtained justification through SAD for required advance maintenance for different sections of the channel. The advance maintenance is necessary to provide the depths for the ships due to the high volume of siltation. With funding constraints, inflexible contracting procedures and environmental windows, the District had to have advance maintenance to get through critical periods so ships would not have to light load any more than they currently light load. Seventy percent of ships calling on Savannah Harbor are operationally restricted at this time. The advance maintenance is very important to the Savannah Harbor. **It was recommended to the PDT, that better identification of existing advance maintenance locations be provided including where already authorized and accomplished. As a point of clarification for the With Project condition, it was stated that the Expansion Project had to demonstrate the continued need for advance maintenance from an economic standpoint.**

Angie Premo (CESAD) pointed out in the write-up and in Table 2 that the lateral advance maintenance widener on the outer part of the channel was shown as having been dredged. The PDT agreed that this is not part of the existing project. It will be removed from the table and the write-up and per the In-Progress Review of April 2007; this feature will be discussed in the General Reevaluation Report (GRR) since it may represent a cost efficiency for the O&M of the deepened project.

4. **DMMP.** Alan Garrett (CESASPM) explained that most of the materials pumped out of the inner Savannah Harbor are very fine silts and clays and that they are distributed among the 7 confined disposal areas along the North side of the channel. The materials from the Savannah Entrance Channel are disposed of in the EPA approved offshore disposal site. The materials that are pumped into the system of confined disposal areas are dried out on a three-year rotational basis and then borrowed to build the dikes. These areas also incorporate environmental mitigation components by providing flooded areas for waterfowl and nesting islands for migratory shore birds. With the existing disposal areas and the present method of rotating their use for borrow and mitigation purposes, there is 50 years

of capacity. As part of the GRR, the DMMP portion will cover where the new work material will be placed and what actions the project would take to ensure the sediment storage capacity of the existing project is made whole.

5. **Berth Dredging.** There are 18 different agitation dredging permittees (berth owners) along the Savannah River. The agitation dredging permits allow the berth owners to drag a beam alongside the berth to displace shoaled materials into the channel or along the side slopes of the channel. There is one permit which allows the dredger to use a hydraulic cutter head dredge to pump into the navigation channel in areas which are shown to be below project depth. The Federal Government then dredges those materials into the disposal areas at a later date. The permittees do pay an agitation dredging fee to the US Treasury on a per cubic yard basis. **HQSACE advised that this non-Federal dredging work be addressed in the without project condition to explain what is happening right now in the harbor in terms of use of the disposal areas.**
6. **Public Involvement.** Hope Mooror (Georgia Ports Authority) explained that there has been a great deal of public involvement in this project. The Stakeholders Evaluation Group has met 56 times in addition to many committee meetings. This has been very good from a public involvement and public education standpoint on how the Corps' process works.
7. **Agency Involvement.** Bill Bailey (CESAMPD) explained that the District has provided the agencies information as it has been developed. The agencies have helped on the front end by telling the District what information they want to see to make decisions.
8. **Commerce.** Kim Otto (CESAMPD) explained that Savannah is the second largest port on the East Coast in TEU volume and the fourth largest in the nation. After planned and funded improvements at Garden City Terminal are completed in 2015, the terminal will be the largest single container handling facility in the nation. Under the without project condition, the volume of TEUs projected for Garden City Terminal will continue to increase. Likewise, the fleet calling at Savannah will continue to include larger vessels. It is projected to shift from being predominately Panamax-size vessels to Post-Panamax size vessels. Vessels operating at drafts greater than 38 feet will continue to be constrained at Savannah harbor.
9. **Environmental Resources.**
 - a. Bill Bailey (CESAM-PD-E) explained that the District is conducting studies to find out the extent of the naturally-occurring Cadmium. The team is assuming they will have to put the material in a confined disposal area and cap it. This is the highest cost plan. In the existing condition, the District does not know if they have a problem with existing Cadmium levels. The issue for Expansion is where to put the new work materials and how to protect the environment after the deposition occurs.
 - b. The City of Savannah has a raw water intake on Abercorn Creek. This is upstream of the harbor, but it is taking water off a tributary to the Savannah River. The City has said the present depth of the harbor has impacted the quality of the water they withdraw. The issue is one of chloride levels in the water. The District has done some detailed modeling work to address this concern.
 - c. Water Quality. The Savannah Harbor violates the existing water quality standard for dissolved oxygen (DO). The EPA has issued a TMDL for DO for the harbor that prohibits discharge of oxygen-depleting substances into the river from Augusta all the way down to the ocean. The States are trying to figure out how to implement this TMDL as it restricts existing and future development. The PDT will have to address the effects of additional deepening on the DO problem and is not considering existing impacts resulting from the many point sources up and down the river system or the current harbor configuration.

The District's goal is to identify any effect that the Expansion Project would have on dissolved

oxygen and then mitigate for that incremental impact. The assumption is that as the State implements the TMDL, the DO should improve. The District will assume the present level of DO is constant. **In addition to recognizing the regulatory requirement, our base conditions should include some idea of what future conditions may be as industries attempt to address the TMDL issue. We need to address the effectiveness of the mitigation plan under various assumptions about what the DO will be in the future. The base conditions could change and make it more costly.**

- d. Fish Species. There are certain fish species that are important in the Savannah River. Shortnose Sturgeon is an endangered species and Striped Bass is important for recreational use. American Shad and Flounder are also being evaluated for impacts.
 - e. Savannah National Wildlife Refuge. Bill Bailey explained that the Refuge is in the upper end of the harbor, almost across the river from GPA's terminal. It extends upriver from there. It is a fresh-water refuge at the head of a salt-water harbor. The Fish and Wildlife Service has identified tidal fresh-water marsh as being a critical resource and that is their biggest issue in this project. The project will have to address this with mitigation.
10. **Floridan Aquifer.** Cardwell Smith (CESASEN-G) explained that most of the drinking water for coastal Georgia and South Carolina area comes from the Floridan Aquifer. Due to pumping in Savannah there is a cone of depression around Savannah that tends to pull salt water through a confining layer above the aquifer down into the aquifer. The studies conducted under the Savannah Harbor Expansion Project proved the relationship between industrial drawdown and the Aquifer for the first time. There was concern about potential effects to the confining layer above the aquifer due to dredging the harbor. From what the District has determined from their studies and work that others have done, the process is ongoing now. The state is trying to cut back on the pumping to decrease this effect. Nowhere along the length of this channel would the confining layer ever be breached. The only effect would be reducing the thickness of the confining layer due to dredging. This small incursion would have minimal to no effect on the existing drawdown situation or the quality of water in the aquifer.
 11. **Tybee Island.** Alan Garrett (CESAS-PM) submitted that although it was not included in the report at present, some mention needed to be made about Tybee Island and the current existing situation with the 2005 revisions to the Georgia Coastal Zone Management Program. Since about 2000 there have been ongoing studies on the impacts of the existing channel on Tybee Island with respect to littoral drift. The current Tybee Island Feasibility Study is not part of SHEP. There is an authorized shore protection project at Tybee and there is an on-going study looking at expanding or having another shore protection project there as well. ERDC has determined that the existing ship channel and training walls have truncated the littoral drift. A study done by ATM showed that after the channel was dredged to below -38 feet mhw it began to trap most of the sand (70%-80%), so there are no additional impacts beyond those occurring with the existing authorized channel. Tybee Island officials are looking at the Federal Government to recognize the channel's impact on their down-drift beach. SAD explained that the way the Corps is currently handling shore protection projects where there are navigation impacts from the adjacent navigation channel, is that the cost sharing formula is permanently adjusted for the existing Federal shore protection project. Since this is an existing condition, we would probably take a Section 111 type approach and permanently adjust the cost sharing to have a greater Federal share on those projects. SAD said the Tybee Island Feasibility Study report should have the same level of technical assurance and review as the aquifer. **This issue will be added as a part of the without project condition.**
 12. **Beneficial Use of Dredged Material.** SHEP did address this as a sediment placement issue for all of the offshore bar materials. There are expectations from residents of Tybee Island and the State of Georgia with respect to OCGA 52-9-1 and 52-9-2 (HB727) which has been incorporated into the State CZM. This is under review at Headquarters. HQ stated that generally, the Corps' stance has been that States can put these requirements into their CZM but it does not obviate the Corps' own rules with

regard to cost sharing of incremental costs. For example it might cost more to insure these sediments are placed in the near shore zone. **The issue of H.B. 727 should be addressed in the Without Project Condition.**

13. **Cultural Resources.** All surveys of project impact areas have been completed with the exception of the mitigation areas. Those are covered under a Programmatic Agreement.
 - a. CSS Georgia is the only major cultural resource issue remaining. In 2003, the Operations and Maintenance Program and the SHEP co-funded the costs of a study to identify past, present and future O&M impacts and investigate the incremental impact of SHEP. Those studies revealed that O&M operations in 1983 had caused a massive impact to the CSS Georgia; therefore mitigation of the CSS Georgia was an O&M responsibility. However, for SHEP there would be additional studies needed if O&M removed the wreck because they could not guarantee that all the live ordinance was removed. The District has been unsuccessful in getting O&M funding to perform the CSS Georgia mitigation. This has to be taken care of before deepening occurs through that reach. SAD explained that mitigation must be performed prior to or concurrent with the project. If the District continues to be unsuccessful in getting funds to do this mitigation, and if we are ready to move ahead with SHEP, this might be one of the first items done as part of SHEP. The cost sharing could be adjusted with respect to this item because it is an O&M responsibility. We could have a plan to execute a PCA to do this part and begin to move forward. Most of the costs would be 100% Federal with the incremental costs associated with further deepening being shared. This is not really part of the SHEP, so it would not be part of a Section 902 limit. GPA, as local sponsor, said it would support this position since that cost would not be part of the project, not included in the total project cost, and therefore not included in the benefit:cost ratio or the Section 902 limit.
 - b. Old Ft. Jackson. A few years ago the Corps and GA DNR implemented a project consisting of sheet piling and bank stabilization. That action protected the eroded shoreline of the historic fort. At that time the Corps determined that there would be no further impact from a deepened harbor.
 - c. Ft. Pulaski National Monument. The Corps has conducted studies to determine the incremental shoreline erosion from deepening and determined that there would be minimal impact from the project.

14. **Economic Analysis.**

- a. Existing Conditions. The Economic Analysis primarily focuses on container trade. It also includes LNG traffic. With the current berth expansion, the LNG vessels are expected to increase to 118 by 2009 and with a third expansion to 213 vessels per year. In 2006, Savannah Harbor handled approximately 2.2 million TEU's. Between 1988 and 2006, the Garden City Terminal annual total TEU volume increased by 490%. Approximately 45% of vessels calling Savannah are drafting more than 35 feet (sailing draft). Of the total numbers of calls, approximately 71% are services that transit the Panama Canal. A clarification was made about the sailing and design drafts of the vessels.
- b. Commodity Forecast. In 2004, GEC produced a commodity forecast for Savannah Harbor. It has proven to be too conservative. The actual export TEU's for 2004 were 899,339. This volume was not forecasted in GEC's report to occur until between 2030 and 2040. SAM believes the recent growth should be used as a baseline upon which the future trade should be projected. They updated the baseline conditions through 2006 and the long-term growth rates that were developed by GEC were then applied to this baseline to determine future levels of trade. GPA expressed concern with using these very conservative growth rates since the port has experienced an average growth rate from 1995 of 12% and average growth rate of about 15% in the last five years.

- c. **Risk and Uncertainty Analysis.** Risk and uncertainty will be incorporated into the analysis. There will be several scenarios: 1) constraining the forecast in 2041 based upon assumption that port will reach capacity during this forecast year; 2) an unconstrained forecast; 3) a forecast based upon doubling growth rates used; 4) a forecast based upon cutting growth rates in half; and 5) based upon guidance requirements, constraining the forecast 20 years after the project comes on line. It is anticipated that the forecasts based upon doubling the growth rate and cutting the growth rates in half will give a band to see how the project performs. **HQ said the risk and uncertainty analysis should be accompanied by some observations about what is actually happening.** Also some observations that the original projections are conservative and the benefits tend to be greater than those projections indicated. GPA expressed concern about how the low growth rate would affect the ranking for funding of the project.

Jerry Diamantides suggested taking the most recent existing growth rate and smooth it down to the projected long term growth rate in a linear fashion. For example, transition over a five-year period so that you are going from 14% and blend into the much lower long-term projection. Ken Claseman noted that the forecasting approach developed by Kevin Horne (GEC) is the accepted procedure and expressed a concern that other procedures may not be acceptable. He also noted that long term forecasting techniques do not do a good job of forecasting short term fluctuations in commodity shipments. **It was suggested that this be discussed with Dr. Dave Moser. A meeting will be held with the key people (Dr. Dave Moser, Kevin Knight, Kevin Horne, Becky Moyer, Marianne Matheny-Katz and members of the PDT), to make sure we are reflecting what is actually occurring at the Port of Savannah. Johnny Grandison is arranging the meeting.** Ken Claseman noted that any changes in the commodity forecast may result in substantial additional economic analysis, which would result in significant schedule impacts.
 - d. **Panama Canal.** Adjustments have been made to the original model to include the consideration of the expanded Panama Canal. **The report should contain a discussion about the assumptions of the Panama Canal.**
 - e. **Fleet Forecast.** **The fleet forecast and other economic information should be discussed with Becky Moyer. Kim Otto will set up a conference call with Becky to go over these assumptions.**
15. **Jasper County Proposed Terminal.** As discussed in previous IPRs, this project will address the possibility of a terminal being developed in Jasper County. Previous work evaluated a new terminal as an alternative to deepening up to the Garden City Terminal. The present efforts consist of a scenario approach to evaluate the economic effects of a new terminal on the decision to deepen the harbor. There are enormous uncertainties about this possible terminal. A set of scenarios (up to 26) will be evaluated at a reconnaissance level. These scenarios will give decision makers information concerning (1) whether the incremental investment between a port at Jasper County and Garden City is worthwhile, and (2) whether deepening to the Garden City Terminal is justified if a new terminal is developed at Jasper County. There are so many scenarios because of the present number of unknowns related to development of a terminal. So far it appears the increment is economically justified. Jasper Terminal is not in our future most likely without project condition, but it is being addressed in these scenarios. **Include a statement in the GRR that this is assuming an investment of \$XXX M to make a Jasper Terminal a reality. Also include that there is likely to be substantial mitigation required for development of the terminal.**
16. **Environmental Resources.** Bill Bailey (CESAMPD) said the PDT is looking at acquiring some lands on the border of the Savannah National Wildlife Refuge as mitigation. These lands are undeveloped but they are in an area that is experiencing substantial residential development. In the without project condition, these lands are likely to be developed. These lands will likely be in a mitigation plan so it is important that the without project condition description talk about what would happen to those lands to set the stage for mitigation credit or benefits that will be identified with the plan to buy those lands.

ENVIRONMENTAL IMPACT STATEMENT

APPENDIX N: Record of Interagency Coordination

SAVANNAH HARBOR EXPANSION PROJECT
Chatham County, Georgia and Jasper County, South Carolina

January 2012
(Revised July 2012)

ATTACHMENT 1

Correspondence with SC DHEC concerning
Water Quality Certification and Coastal
Zone Management Consistency



**US Army Corps
of Engineers**
*Savannah District
South Atlantic Division*

SAVANNAH HARBOR EXPANSION PROJECT OVERVIEW OF COORDINATION WITH SOUTH CAROLINA WATER QUALITY CERTIFICATION AND CZM CONSISTENCY

TABLE OF CONTENTS

CORRESPONDENCE	PAGE
29 Sep 2010 – Letter from DHEC to USACE	8
• Stated that 60 days isn't adequate time period for decision on 401 certification	
04 Nov 2010 – Letter from USACE to DHEC	9
• Reiterated that the schedule calls for 401 Water Quality Certification at end of public comment period	
15 Nov 2010 – Letter from USACE to DHEC	10
• Requested review of DEIS and GRR with regard to Water Quality Certification	
15 Nov 2010 – Joint Public Notice of Availability of SHEP DEIS and GRR	12
15 Nov 2010 – Letter from USACE to DHEC	22
• Requested review of DEIS and GRR	
23 Nov 2010 – DHEC notice to USACE	24
• Stated public notice in newspaper needed before considering Section 401 application	
03 Dec 2010 – Letter from DHEC to USACE	27
• Formal request for additional time to review public comments and application for 401 certification	
07 Dec 2010 – Letter from SC SHPO to USACE	28
• Concurred with mitigation proposal for adverse impacts on the CSS Georgia	
• Requested consultation on programmatic agreement managing effects to historic properties	
17 Dec 2010 – Letter from USACE to DHEC (Earl Hunter)	30
• Notice that public comment period was extended 15 days	
17 Dec 2010 – Letter from USACE to DHEC (David Wilson)	32
• Notice that public comment period had been extended 15 days	
30 Dec 2010 – DHEC Public Notice of Department Decision	34
• Notice of proposal to deny Water Quality Certification	
• Included "Notice of Appeal Procedure" details	

10 Jan 2011 – Letter from USACE to DHEC	37
• Requested definition of “reasonable time” needed for 401 determination	
13 Jan 2011 – Letter from DHEC to USACE	39
• Reiterated that DHEC may take one year to render a decision on WQ certifications	
13 Jan 2011 – Letter from USACE to DHEC	41
• Requested DHEC to withdraw proposal to deny 401 certification and acquiescence of up to one year to review application	
14 Jan 2011 – Letter from DHEC to USACE	42
• Rescinded Notice of Proposed Department Decision to deny Water Quality Certification	
21 Jan 2011 – Letter from DHEC-OCRM to USACE	43
• Requested same amount of time for CZM consistency review as 401 certification (one year)	
21 Jan 2011 – Letter from US Department of Interior to USACE	44
• Comments on DEIS and GRR and Savannah District’s responses	
24 Jan 2011 – Letter from USACE to DHEC-OCRM	109
• Request for additional time for CZM consistency review was denied	
25 Jan 2011 – Letter from DHEC-OCRM to Corps	111
• DHEC provided reasons why they believe the project does not comply with SC CZM Program	
31 Jan 2011 – Letter from DHEC-OCRM to USACE	120
• Provided reasons why they believe the project does not comply with SC CZM Program	
03 Mar 2011 – Letter from DHEC to USACE	122
• Identified areas in which it believed the project did not comply with DHEC WQ regulations	
• Stated Corps had not provided all requested information	
30 Mar 2011 – Letter from USACE to DHEC	126
• Corps provided some requested information	
• Corps responses to DHEC comments	
30 Mar 2011 – Letter from USACE to DHEC	158
• Reiterated why Corps believes project complies with SC CZM Program	

21 Apr 2011 – Email from USACE (William Bailey) to DHEC-OCRM (Rheta DiNovo).....	167
• Corps provided some requested information	
13 May 2011 – Email from USACE (W. Bailey) to DHEC (Blair Williams, Christopher Beckham)	168
• Provided requested information on how wetland mitigation plan complies with Mitigation Rule	
13 May 2011 – Email from USACE (W. Bailey) to DHEC (C. Beckham).....	170
• Confirmed that a Federal navigation project does not pay Water Quality Certification fee	
17 May 2011 – Email from DHEC (Wade Cantrell) to USACE (W. Bailey)	171
• Requested assurance the Speece cones will perform as designed and additional supporting information	
17 May 2011 – Email from USACE (W. Bailey) to DHEC (C. Beckham, et al.).....	172
• Request for meeting with Wetlands Interagency Coordination Team on June 1	
18 May 2011 – Email from USACE (W. Bailey) to DHEC (W. Cantrell).....	173
• Provided some requested information (hydrodynamic and chloride modeling reports)	
18 May 2011 – Email from USACE (W. Bailey) to DHEC (W. Cantrell).....	176
• Provided some requested information (additional attachments to same email above)	
27 May 2011 – Letter from DHEC-OCRM to USACE.....	179
• Reiterated that they believe the project does not comply with SC CZM Program	
• Will review the information Corps recently provided (13 May)	
• Welcome additional discussions	
03 Jun 2011 – Email from USACE (W. Bailey) to DHEC (C. Beckham, et al.).....	183
• Provided slides of wetland impacts and mitigation presentation	
03 Jun 2011 – Email from USACE (W. Bailey) to DHEC (Heather Preston).....	267
• Provided records of previous Wetlands Interagency Coordination Team (ICT) meetings	
07 Jun 2011 – Email from USACE (W. Bailey) to DHEC (C. Beckham, et al.).....	268
• Provided draft Memorandum for Record for Wetlands ICT meeting	
• Provided revised Memorandum for Record	
08 Jun 2011 – Email from USACE (W. Bailey) to DHEC (C. Beckham, et al.).....	278
• Provided additional information (Mitigation Rule)	

16 June 2011 – Letter from DHEC to Corps.....	280
• Reiterated environmental concerns and approval requirements	
• Requested additional information	
13 Jul 2011 – Email from USACE (W. Bailey) to DHEC (C. Beckham)	283
• Provided some requested information (draft responses to public comments)	
27 Jul 2011 – Email from USACE (W. Bailey) to DHEC (C. Beckham)	286
• Provided some requested information (report on DO system design)	
01 Aug 2011 – Email from USACE (W. Bailey) to DHEC (C. Beckham)	325
• Provided some requested information (report on hydrodynamic models)	
01 Aug 2011 – Letter from USACE to DHEC	354
• Provided additional information on wetland mitigation SOP calculations	
09 Sep 2011 – Email from USACE (W. Bailey) to SAS Executive Office (COL Hall)	356
• Provided information (DO system, adaptive management, wetland analysis)	
30 Sep 2011 – Letter from DHEC to USACE	359
• Reiterates objection to Corps' determination of coastal zone consistency	
• Public Notification of staff intent to deny certification	
• Notify Corps of ability to request a hearing before DHEC Board	
07 Oct 2011 – Letter from USACE to DHEC (Clerk of the Board)	373
• Requests a final review conference	
• Provides information on issues identified by DHEC staff	
17 Oct 2011 - DHEC Notice of Final Review Conference to USACE and GPA	398
24 Oct 2011 – DHEC Notice of Final Review Conference to USACE and GPA (includes allotted times for arguments/rebuttals)	400
04 Nov 2011 – Letter from USACE (Office of Counsel) to DHEC	402
• Agrees to some conditions requested by DHEC	
04 Nov 2011 – Letter from USACE to DHEC	403
• Commitment on operation of DO Systems	
09 Nov 2011 – Email from USACE (Office of Counsel) to DHEC	405
• Provides Corps position on issues identified by DHEC staff	

15 Nov 2011 – Letter with DHEC Final Agency Decision.....	544
• Agreement that the project meets SC requirements	
• Includes consent agreement	
15 Nov 2011 – Letter from DHEC to Corps	552
• Provides water quality certification	
15 Nov 2011 – Letter from DHEC to Corps	554
• SC does not object to Corps' determination of coastal zone consistency	

LIST OF MEETINGS

- 21 Apr 2011 - Meeting between Corps and DHEC-OCRM
- Corps provided some requested information
 - DHEC identified major issues (wetland impacts, DO impacts, endangered species)
- 12 May 2011 – Meeting between Corps and DHEC
- DHEC reiterated environmental concerns and requested additional information
- 01 Jun 2011 – Wetlands Interagency Coordination Team meeting (DHEC attended)
- Corps provided information on wetland impacts
- 28 Oct 2011 – Meeting between Corps and DHEC
- DHEC identifies five major issues
- 10 Nov 2011– SC DHEC Board Hearing
- Staffs meet to discuss remaining issues
 - Staffs reach agreement on issues
 - GPA agrees to address two of DHEC's concerns
 - DHEC staff recommends approval to their Board
 - Board approves project

BOARD:
 Paul C. Arphing, III
 Chairman
 Edwin F. Cooper, III
 Vice Chairman
 Steven G. Kinner
 Secretary



BOARD:
 Henry C. Scott
 M. David Mitchell, MD
 Glenn A. McCall
 Coleman F. Dickinson, MD

September 29, 2010

Colonel Jeffrey M. Hall
 District Engineer
 U.S. Army Corps of Engineers
 100 W. Oglethorpe Avenue
 Savannah, Georgia 31401

RE: The Savannah Harbor Expansion Project (SHEP)

Dear Colonel Hall:

At the September 14, 2010 meeting of the South Carolina Maritime Commission, representatives of the U.S. Army Corps of Engineers (Corps) Savannah District indicated that their schedule would require the South Carolina Department of Health and Environmental Control (SCDHEC) to reach a 401 decision within 60 days of receipt of an application. SCDHEC is typically allowed one year by the Federal permitting agency to issue, waive, or deny a 401 certification. SCDHEC is concerned that 60 days is not an adequate timeframe for a project the size and scope of the SHEP. Please note that upon receipt of a complete application, SCDHEC is required to place the project on public notice for a minimum of 30 days which may be extended to 60 days for major projects. Additionally, SCDHEC is required to issue a notice of proposed decision for 15 days before issuing a final agency decision.

Based on the above, it is the opinion of SCDHEC that 60 days is not adequate to receive public comment and review the application and all supporting documents on a project of this magnitude and reach a 401 certification decision. At such time that SCDHEC receives the application and supporting documents, SCDHEC will consult with the Corps on an appropriate timeframe. Thank you for your consideration of this matter. Should you have any questions, please contact Heather Preston at 803-898-3105.

Sincerely,

David E. Wilson, Jr., Chief
 Bureau of Water

cc: The Honorable Lindsey O. Graham

Handwritten notes and stamps on the right side of the page:
 PM-C
 DC
 DE
 DY
 CC
 5:10-15

Recd

REPLY TO
ATTENTION OF

DEPARTMENT OF THE ARMY
SAVANNAH DISTRICT, CORPS OF ENGINEERS
100 W. OGLETHORPE AVENUE
SAVANNAH, GEORGIA 31401-3640

NOV 4 2010

Executive Office

Mr. David E. Wilson, Jr., Chief
Bureau of Water
South Carolina Department of Health
and Environmental Control
2600 Bull Street
Columbia, South Carolina 29201

Dear Mr. Wilson:

I refer to your September 29, 2010, letter concerning the Savannah Harbor Expansion Project schedule and the time allotted for the South Carolina Department of Health and Environmental Control's (SCDHEC) review prior to issuance of the Section 401 Water Quality Certification.

It is our intention to submit an application for Water Quality Certification concurrent with the start of public review of the project's draft documents. This action is now scheduled for late November 2010. The project schedule calls for the Section 401 Water Quality Certification to be obtained at the end of the public comment period in late January 2011. We understand that the documents we will be providing are extensive, but their length is a reflection of the numerous detailed investigations that we have conducted. We will coordinate with your staff after release of the project's draft documents to ensure the documents contain all the technical information you need to render a decision on this project. In addition, we will meet with you or your staff to discuss any specific areas of concern in order to help facilitate a decision.

We appreciate your continued support of the US Army Corps of Engineers' efforts to establish and maintain navigable waterways for the benefit of national commerce. We look forward to working with you during the certification process. A copy of this letter is being sent to Senator Lindsey O. Graham, 530 Johnnie Dodds Boulevard, Suite 202, Mt. Pleasant, South Carolina 29464.

Sincerely,


Jeffrey M. Hall
Colonel, US Army
Commanding

Copy

REPLY TO
ATTENTION OF:

DEPARTMENT OF THE ARMY
SAVANNAH DISTRICT, CORPS OF ENGINEERS
100 W. OGLETHORPE AVENUE
SAVANNAH, GEORGIA 31401-3640

Planning Division

JAN 15 1990

Mr. David Wilson
Bureau Chief
South Carolina Department of Health and Environmental Control
Bureau of Water
2600 Bull Street
Columbia, South Carolina 29201-1708

Dear Mr. Wilson:

The Savannah District, US Army Corps of Engineers has prepared a Draft Tier II Environmental Impact Statement (DEIS) and General Reevaluation Report (GRR) to incrementally evaluate deepening the Savannah Harbor Federal Navigation Project to a maximum authorized depth of -48 feet Mean Lower Low Water (MLLW) as authorized by the Water Resources Development Act of 1999 (Public Law 106-53, Section 102(b)(9)). The studies evaluated the engineering, environmental, and economic acceptability of various alternatives for the present and future harbor conditions over a 50-year analysis period. The DEIS is being circulated to agencies and the public for a 45-day comment period.

Recommended improvements as outlined in the Maximum Authorized Plan and the tentative National Economic Development (NED) Plan include: channel deepening from the sea through the Harbor Entrance Channel to the Garden City Terminal; channel widening to create meeting areas at Long Island and Oglethorpe Ranges; widening and deepening of the Kings Island Turning Basin; and channel widening at three bends.


In order to avoid, minimize, or compensate for adverse environmental impacts associated with the proposed action, the following mitigation features are proposed:

- (1) Acquire and preserve lands adjacent to the Savannah National Wildlife Refuge
- (2) Construct a diversion structure, deepen, and close the lower arm of McCoys Cut
- (3) Close Rifle Cut
- (4) Remove the Tidegate abutments and piers
- (5) Construct a rock sill at the mouth of Back River
- (6) Fill a broad berm in the Sediment Basin
- (7) Construct a sill in Middle River near Disposal Area 2A

- (8) Construct a boat ramp on Hutchinson Island
- (9) Construct a fish passage structure at the New Savannah Bluff Lock and Dam
- (10) Mitigate for striped bass (stocking)
- (11) Construct and operate a dissolved oxygen system
- (12) Restore brackish marsh in Disposal Area 1S
- (13) Recover data from the Ironclad CSS Georgia and other significant archaeological resources
- (14) Monitor and adaptively manage the river ecosystem

Please find enclosed one hard copy and one digital video disc (DVD). Pursuant to the Coastal Zone Management Act and the Fish and Wildlife Coordination Act, I request you review this DEIS and GRR and provide any comments you may have, particularly with regard to Water Quality Certification. Please provide your comments no later than 45 days from the date of this letter to Mr. William Bailey, ATTN: PD, US Army Corps of Engineers, Savannah District, 100 West Oglethorpe Avenue, Savannah, Georgia 31401-3640 or by email to CESAS-PD@usacc.army.mil.

Sincerely,



William G. Bailey
Chief, Planning Division
Savannah District

Enclosures



REPLY TO
ATTENTION OF

DEPARTMENT OF THE ARMY

SAVANNAH DISTRICT, CORPS OF ENGINEERS

P.O. BOX 889

SAVANNAH, GEORGIA 31402-0889

Planning Division

November 15, 2010

JOINT PUBLIC NOTICE

US Army Corps of Engineers, Savannah District,

Post Office Box 889

Savannah, Georgia 31402-0889

and the

Georgia Department of Natural Resources

and the

South Carolina Department of Health and Environmental Control

NOTE: THIS IS A US ARMY CORPS OF ENGINEERS CIVIL WORKS PROJECT

TO WHOM IT MAY CONCERN:

SUBJECT: Notice of Availability of a Draft Tier II Environmental Impact Statement (Draft EIS) and Draft General Reevaluation Report (Draft GRR) pursuant to the authority provided by Section 102(b)(9) of the 1999 Water Resources Development Act for improvements and continued maintenance of the existing Savannah Harbor Federal Navigation Project, Chatham County, Georgia and Jasper County, South Carolina.

The responsible lead agency is the Savannah District, US Army Corps of Engineers. The following agencies served as Cooperating Agencies in preparing the Draft EIS: Environmental Protection Agency - Region IV; National Oceanic and Atmospheric Administration (NOAA) Fisheries Service - Southeast Region; US Fish and Wildlife Service - Southeast Region; and the Georgia Ports Authority.

Notice of the following is hereby given:

- a. Pursuant to the relevant provisions of the laws and others as applicable:
 1. The Clean Water Act (33 U.S.C. 1251, et. seq.).
 2. The Endangered Species Act of 1973, as amended (16 U.S.C. 1531, et. seq.).
 3. The National Historic Preservation Act of 1966 (U.S.C. 470, et. seq.) and the Preservation of Historical Archeological Data Act of 1974 (16 U.S.C. 469, et. seq.).
 4. The National Environmental Policy Act of 1969 (42 U.S.C. 4321).
 5. Coastal Zone Management Act of 1972, as amended (16 U.S.C. 1531, et. seq.).
 6. Magnuson-Stevens Fishery Conservation and Management Act, as amended (16 U.S.C. 1801, et. seq.).

7. The Marine Protection, Research, and Sanctuaries Act of 1972, as amended (33 USC 1413)

b. The Savannah District, US Army Corps of Engineers has evaluated the engineering, environmental, and economic acceptability of various alternatives to address navigation problems in Savannah Harbor over a 50-year analysis period. The Draft Tier II EIS and Draft GRR document the results of the investigations and analyses that were conducted. The Savannah District is releasing these documents for public review and comment pursuant to the National Environmental Policy Act (NEPA) while the Department of the Army completes its review.

c. Pursuant to Sections 401 and 404 of the Clean Water Act (33 USC 1344), and Section 103 of the Marine Protection, Research, and Sanctuaries Act of 1972, as amended (33 USC 1413), notice is hereby given that the Savannah District, US Army Corps of Engineers, is considering a proposal for expansion of the Savannah Harbor Navigation Project that includes discharge of fill into navigable waters of the US to construct and maintain submerged berms and nearshore berms, continued discharge of effluent from existing confined disposal facilities into waters of the US, and transportation of sediments dredged from the entrance channel (both new work and continued maintenance material) to the Savannah Ocean Dredged Material Disposal Site (ODMDS). The proposal also includes discharge of dredged material into navigable waters of the US for several mitigation features, including closing Rifle Cut, construction of a flow diversion structure and other modifications at McCoys Cut, deepening the upper portions of Middle and Back Rivers, removing the Tidegate and its abutments, construction of additional features including a submerged sill and berm at the mouth of Back River, a submerged sill at the mouth of Middle River, three dissolved oxygen systems, a fish passage structure at the New Savannah Bluff Lock and Dam, a boat ramp on Hutchinson Island, and restoration of Disposal Area 1S.

d. The Savannah District announces the availability to the public of a Draft EIS and Draft GRR concerning the action. Copies of the Draft EIS and Draft GRR have been furnished to Federal, State, local, and other agencies of interest. Electronic copies of the Draft EIS and Draft GRR can be obtained from the following website: www.sas.usace.army.mil, and a limited number of hard copies are available upon email request to Mr. William Bailey at the following address: CESAS-PD@usace.army.mil.

e. A public workshop will be held during the comment period and is currently scheduled to occur December 15, 2010 at the Savannah Civic Center from 4:00 to 8:00 P.M. (subject to change). US Army Corps of Engineers officials will be available to answer questions, provide information, and accept written and dictated comments.

f. Written statements regarding the Draft EIS and Draft GRR for the proposed action will be received at the Savannah District Office until

12 O'CLOCK NOON, DECEMBER 30, 2010

from those interested in the activity and whose interests may be affected by the proposed action.

EXISTING PROJECT DESCRIPTION:

Savannah Harbor is an approximately 32.5 mile Federal navigation project located along the Savannah River in southeast Georgia. The current Savannah Harbor Navigation Project has an authorized project depth of 30 feet Mean Lower Low Water (MLLW) in the inner harbor (Stations 112+000 to 105+000), 36 feet MLLW (Stations 105+000 to 103+000), 42 feet MLLW (Stations 103+000 to 0+000), 42 feet MLLW in the mouth of the entrance channel (Stations 0+000 to -14+000B), and 44 feet MLLW in the remainder of the entrance channel (Stations -14+000B to -60+000B). The current channel width is 600 feet across the ocean bar to the entrance channel (Stations -14+000B to -60+000B), 500 feet from the entrance channel to Kings Island Turning Basin (Stations -14+000B to 103+000, with the exception of 400 feet wide from Stations 58+000 to 59+000, 400 feet from the Kings Island Turning Basin to the Argyle Island Turning Basin, and 200 feet from the Argyle Turning Basin to the upstream limit of the authorized project. Rapid shoaling rates in the Federal navigation channel inhibit the ability to maintain the exact project depth (i.e., -42 feet MLLW) at all times; therefore, the project uses allowable overdepth and advance maintenance procedures to counteract the shoaling effects. The existing Federally-maintained navigation channel includes 2-feet allowable overdepth and up to 6-feet of advance maintenance. Savannah Harbor was last deepened between 1993 and 1994.

DESCRIPTION OF PROPOSED PROJECT IMPROVEMENTS:

The alternative project depths being considered are 44-, 45-, 46-, 47-, and 48-feet within the inner harbor navigation channel. The deepening would follow existing channel side slopes, except in the bend wideners. For the entrance channel oceanward of the jetties, the proposed authorized depths would include the traditional 2-feet of additional depth to address wave effects in each alternative. The project would deepen a portion of the inner harbor from channel Stations 0+000 (near Fort Pulaski) to 103+000 (above the Kings Island Turning Basin), a distance of 103,000 river feet. The Entrance channel or ocean bar channel proposed for deepening begins at Station 0+000 and extends outward to a maximum length of approximately 98,000 feet. The length of the Entrance channel depends on the project depth, since the channel would extend oceanward until the channel depth matches the existing ocean depths. The maximum proposed project length is approximately 38 miles. The tentatively recommended plans are the 47- and 48-foot depth alternatives. The 47-foot depth alternative is the National Economic Development Plan, while the 48-foot alternative is the Maximum Authorized depth alternative. Overdepth dredging and advanced maintenance dredging remain the same as for the existing project and increase the final dredging depths beyond the stated authorized project depths. In addition, confined dredged material disposal areas would remain the same as for the existing project.

PROJECT IMPACTS:

The Draft EIS assesses the potential impacts of the proposed project alternatives on endangered species, wetlands, fisheries, benthic communities, birds, marine mammals, water quality, air quality, environmental justice, historic properties, and potable surface and groundwater resources. The major impacts to biological resources were evaluated using calibrated

hydrodynamic and water quality models that predict changes to salinity and dissolved oxygen due to the proposed harbor deepening. These changes were then evaluated with respect to the species of concern and to resources of special significance, especially to wetlands within the Savannah National Wildlife Refuge (SNWR). The full description of potential environmental impacts and mitigation measures to avoid, minimize, or compensate for adverse environmental impacts associated with the proposed action are included in Section 5 of the Draft EIS.

a. Direct Impacts to Wetlands. There would be direct adverse impacts to wetlands from dredging along the shoreline of the navigation channel at six locations, two of which are within the Savannah National Wildlife Refuge. Four areas are located on the west side of Hutchinson Island, in Georgia waters. One is located on the east side of Hutchinson Island along a portion of the Tidegate abutment in Georgia. The sixth site is located along a portion of the Tidegate abutment in South Carolina. The extent of the impacts would not differ substantially between channel depth alternatives. Of the maximum 30.0 acres affected by excavation, 14.08 acres could be considered wetlands. The other 15.92 acres are considered high ground. The Corps would mitigate for the direct impacts to these wetlands.

b. Indirect Impacts to Wetlands. The proposed action would cause indirect adverse impacts to wetlands because deepening the channel would allow the tides to move further upstream, changing the salinity of those waters. Since tidal freshwater marshes were identified by the US Fish and Wildlife Service as the single most critical natural resource in the harbor, Savannah District focused on identifying project impacts to that resource. The other natural resource agencies concurred with this priority. The majority of the tidal freshwater marshes presently occur between the Houlihan Bridge (GA 25) and the I-95 Bridge. To avoid and minimize adverse environmental impacts to freshwater wetlands, the project would re-route flows in that area as described in the mitigation plan portion of the Draft EIS. To compensate for remaining adverse wetland impacts which vary by depth alternative up to a maximum of 337 acres for the 48-foot alternative, the project would acquire a maximum of 2,683 acres of lands as prioritized by the US Fish and Wildlife Service. Those lands would be added to the Savannah National Wildlife Refuge.

c. Water Quality in the Savannah Harbor. The proposed action would adversely impact dissolved oxygen levels in the harbor if no mitigation were included. To address this potential impact, the Corps included dissolved oxygen systems in the mitigation plan of each depth alternative. The analyses indicate that oxygen injection is the most cost-effective means to raise dissolved oxygen levels in the harbor. Due to site-specific requirements, a land-based injection system of Speece Cones was identified as being the most effective solution. The City of Savannah expressed concerns during the Tier I phase of the project about whether additional harbor deepening would allow salinity to move upriver to the extent that chloride levels would increase to unacceptable levels at the City's water intake in Abercorn Creek. The Corps developed and used a chloride model to predict chloride concentrations at the City's water intake under three different flow conditions -- average river flows, a drought flow, and during a severe drought. The chloride model predicts minimal effects to chloride levels from harbor deepening or the mitigation plans on the City's water intake.

d. Sediment Quality. Although the Tier I assessment did not identify any unacceptable adverse effects from the excavation, transportation, discharge, or management of the new work or Operations and Maintenance (O&M) sediments, additional sediment sampling was completed

in 2006 as part of the Tier II assessment. The results indicated that the only sediment contaminant of concern for the proposed harbor deepening is naturally-occurring cadmium found in Miocene clays that would be dredged and/or exposed during construction. To address potential adverse effects, the project would place the cadmium-laden sediments in confined dredged material disposal areas and cover them with sediments that do not exceed threshold values. The Corps will also sample and monitor cadmium levels in the confined dredged material disposal areas as described in the Sediment Quality Evaluation in the Draft EIS.

e. Confined Disposal Site Effluent Water Quality. The Corps analyzed the expected effluent from the upper harbor confined dredged material disposal areas and found that the constituent requiring the greatest dilution for the new work sediments to meet Georgia Water Quality standards would be copper. This parameter would meet Georgia Water Quality standards at the edge of a mixing zone of about 84 feet in the Savannah River. The constituent requiring the greatest dilution in the lower harbor sediments was found to be ammonia. That parameter would meet South Carolina Water Quality standards at the edge of a mixing zone of about 180 feet in the Wright River. With respect to disposal of sediments in the ocean, no acute or chronic Water Quality criteria would be violated outside the required 4-hour mixing zone. No more than minimal adverse impacts were identified. See the Section 404(b)(1) Evaluation in the Draft EIS for more information.

f. Fisheries Impacts. The Draft Tier II EIS analyses indicated that adverse affects would occur to Striped bass and Shortnose sturgeon if no mitigation were to occur. To offset striped bass habitat loss, the mitigation plan will supplement the budget of the Georgia Department of Natural Resources Striped bass recovery program to enable the State to stock more striped bass in the estuary. To offset habitat loss of Shortnose sturgeon, the mitigation plan will restore access to historic spawning areas through construction and operation of a fish passage structure at the New Savannah Bluff Lock and Dam and protect important juvenile habitat in the lower portion of Middle River.

g. Cultural Resources. Cultural resources in Savannah Harbor include wrecks, harbor modifications, terrestrial sites, and miscellaneous artifacts. The Draft Tier II EIS reports on the potential impacts to known cultural resources and measures included in the project to safeguard those resources from adverse impact. The proposed project would mitigate adverse impacts to the ironclad CSS Georgia by performing archaeological data recovery, excavation, and curation.

h. Threatened and Endangered Species. A Biological Assessment of Threatened and Endangered Species (BATES) has been performed. The BATES concludes that the proposed action "may affect, but is not likely to adversely affect" piping plover, wood stork, West Indian manatee, Right whale and Humpback whales, sea turtles, and Shortnose sturgeon that may be present within the area. The BATES includes conditions that would be followed to protect endangered species during construction and operation of the project.

i. Groundwater Impacts. An extensive study of the subsurface geology along the harbor showed that the proposed action will have insignificant effects on the rate of downward salt-water intrusion into the Upper Floridan aquifer. The full results of the field work, groundwater modeling, and GIS analyses are described in Section 5 of the Engineering Appendix of the Draft GRR.

j. Other Effects. No other potentially significant adverse impacts have been identified. Other effects are discussed in Section 5 of the Draft Tier II EIS.

AUTHORIZATIONS REQUIRED FROM THE STATE OF GEORGIA:

Coastal Zone Consistency. This notice serves as a request to the Georgia Department of Natural Resources, Coastal Zone Management Program for a Coastal Zone Management consistency determination. Savannah District has evaluated the proposed project and believes it is consistent with the Georgia Coastal Zone Management Program to the maximum extent practicable. The State will review the proposed action and determine whether it concurs that the proposed project is consistent with the State's Coastal Zone Management Program to the maximum extent practicable. Any person who desires to comment or object to Georgia Coastal Zone Management Consistency Certification must do so in writing within 30 days of the date of this notice to the Federal Consistency Coordinator, Georgia Department of Natural Resources, Coastal Resources Division, Suite 300, One Conservation Way, Brunswick, Georgia 31520-8687 and state the reasons or basis for the objections.

Water Quality Certification. This notice serves as a request to the Georgia Department of Natural Resources, Environmental Protection Division for Section 401 Water Quality Certification. Section 404 of the Clean Water Act requires this public notice as part of the water quality certification process to authorize the excavation and placement of dredged material, and discharge of weir effluents to waters of the United States. The Georgia Department of Natural Resources, Environmental Protection Division, intends to certify this project at the end of the 45 days in accordance with the provisions of Section 401 of the Clean Water Act, which is required to conduct an activity in, or adjacent to, waters of the State of Georgia. Any person or agency who desires to comment, object, or request a public hearing relative to State Water Quality Certification must do so within 30 days of the State's receipt of this notice, in writing, and state the reasons basis of objections, or request for a public hearing. Such comments should be submitted to the Georgia Department of Natural Resources, Environmental Protection Division, 205 Butler Street, SE., Suite 1252, Atlanta, Georgia 30334.

AUTHORIZATION REQUIRED FROM THE STATE OF SOUTH CAROLINA:

Coastal Zone Consistency. This notice serves as a request to the South Carolina Department of Health and Environmental Control, Office of Ocean and Coastal Resource Management for a Coastal Zone Management consistency determination. Savannah District has evaluated the proposed project and believes it is consistent with the South Carolina Coastal Zone Management Program to the maximum extent practicable. The District will submit its evaluation to the South Carolina Department of Health and Environmental Control, Office of Ocean and Coastal Resource Management in Columbia, South Carolina, who administers the program. The State will review the proposed action and determine whether it concurs that the proposed project is consistent with the State's Coastal Zone Management Program to the maximum extent practicable. Any person who desires to comment or object to South Carolina Coastal Zone Management Consistency Certification must do so in writing within 45 days of the date of this notice to the South Carolina Department of Health and Environmental Control, Office of Ocean and Coastal Resource Management; 1362 McMillan Avenue, Suite 400, Charleston, South Carolina 29405 and state the reasons or basis for the objections.

Water Quality Certification. This notice serves as a request to the South Carolina Department of Health and Environmental Control for Section 401 Water Quality Certification and serves as a public notice on their behalf. Section 404 of the Clean Water Act requires this public notice as part of the water quality certification process to authorize the excavation and placement of dredged material, and discharge of weir effluents to waters of the United States. The South Carolina Department of Health and Environmental Control will review this project in accordance with the provisions of Section 401 of the Clean Water Act, which is required to conduct an activity in, or adjacent to, waters of the State of South Carolina. Any person or agency who desires to comment, object, or request a public hearing relative to State Water Quality Certification must do so within 60 days of the date of this notice, in writing, and state the reasons, basis of objections, or request for a public hearing to the South Carolina Department of Health and Environmental Control, Division of Water Quality, Bureau of Water, 2600 Bull Street, Columbia, South Carolina 29201-1708.

DEPARTMENT OF THE ARMY EVALUATION:

Environmental Impact Statement. The Draft EIS documents the conclusions of studies on the potential impacts of construction and maintenance of this proposed project. This assessment includes an assessment of several alternatives and the potential environmental impacts. Savannah District announces the availability of this Draft EIS for public review and comment. The District is coordinating the document with interested parties while the Department of Army completes its review of this proposal.

Evaluation Factors. The decision whether to proceed with the project as proposed will be based on an evaluation of the probable impacts, including cumulative impacts of the proposed action. That decision will reflect the national concern for both protection and use of important resources. The benefits that reasonably may be expected to accrue from the proposal will be balanced against the reasonably foreseeable detriments. All factors that may be relevant to the proposal will be considered, including the cumulative effects thereof. Among those are conservation, economics, general environmental concerns, navigation and, in general, the needs and welfare of the people. Individual assessments within the Draft EIS include the following:

a. **Threatened and Endangered Species.** A Biological Assessment of Threatened and Endangered Species (BATES) has been prepared for this project and is included as an appendix to the Draft EIS. The District is coordinating this BATES with the US Fish and Wildlife Service and NOAA Fisheries Service, along with its determination that the project, as proposed with conditions, is not likely to adversely affect listed species.

b. **Section 404 Evaluation.** A Section 404 Evaluation has been prepared in accordance with Section 404(b)(1) Guidelines of the Clean Water Act for the proposed discharges of dredged or fill material and weir effluent into waters of the United States. This evaluation is included in the Draft EIS. The Section 404 (b) (1) Evaluation concluded that the proposed discharges associated with this project comply with the Guidelines.

c. **Section 103 Evaluation.** The suitability of dredged material for transport to and disposal into the approved ocean disposal site has been evaluated pursuant to Section 103 of the Marine Protection, Research, and Sanctuaries Act of 1972. This evaluation is included in the Draft EIS. The evaluation concluded that new work and Operation and Maintenance sediments from the proposed project are suitable for transport and disposal in the Savannah Harbor Ocean Dredged Material Disposal Site. This conclusion is being coordinated with EPA Region IV for their concurrence.

d. **Cultural Resources.** Existing information was reviewed to identify known cultural resources that could potentially be impacted by the proposed project. Investigations were conducted to determine the impact on known significant sites. Additional surveys would be performed along the proposed bend wideners and proposed channel extension to confirm that significant cultural resources are not located in those areas. Additional surveys would be performed at the nearshore berm site and at the proposed sites for the submerged berms along the bar channel if those sites would be used. If a significant resource is identified, the District would make an assessment of measures to avoid or mitigate impacts to that resource. The results of

these additional evaluations would be coordinated with the Georgia State Historic Preservation Office.

Public Hearing. Any person who has an interest that may be affected by this proposed action may request a public hearing. The request must be submitted in writing to the Savannah District Commander, Colonel Jeffrey M. Hall, within the comment period of this notice, and must clearly set forth the interest which may be affected and the manner in which the interest may be affected by this action.

Point of Contact. If there are any questions concerning this public notice, please contact Mr. William G. Bailey, Chief, Planning Division at CESAS-PD@usace.army.mil.



William G. Bailey
Chief, Planning Division
Savannah District
US Army Corps of Engineers



REF ID:
A7574538

DEPARTMENT OF THE ARMY
SAVANNAH DISTRICT, CORPS OF ENGINEERS
100 W. OGLETHORPE AVENUE
SAVANNAH, GEORGIA 31401-3640

Executive Office

NOV 15 2010

(copy)

Mr. C. Earl Hunter
Commissioner
South Carolina Department of Health and Environmental Control
2600 Bull Street
Columbia, South Carolina 29201

Dear Mr. Hunter:

The Savannah District, US Army Corps of Engineers has prepared a Draft Tier II Environmental Impact Statement (DEIS) and General Reevaluation Report (GRR) to incrementally evaluate deepening the Savannah Harbor Federal Navigation Project to a maximum authorized depth of -48 feet Mean Lower Low Water (MLLW) as authorized by the Water Resources Development Act of 1999 (Public Law 106-53, Section 102(b)(9)). The studies evaluated the engineering, environmental, and economic acceptability of various alternatives for the present and future harbor conditions over a 50-year analysis period. The DEIS is being circulated to agencies and the public for a 45-day comment period.

Recommended improvements as outlined in the Maximum Authorized Plan and the tentative National Economic Development (NED) Plan include channel deepening from the sea through the Harbor Entrance Channel to the Garden City Terminal; channel widening to create meeting areas at Long Island and Oglethorpe Ranges; widening and deepening of the Kings Island Turning Basin; and channel widening at three bends.

In order to avoid, minimize, or compensate for adverse environmental impacts associated with the proposed action, the following mitigation features are proposed:

- (1) Acquire and preserve lands adjacent to the Savannah National Wildlife Refuge
- (2) Construct a diversion structure, deepen, and close the lower arm of McCoys Cut
- (3) Close Rifle Cut
- (4) Remove the Tidegate abutments and piers
- (5) Construct a rock sill at the mouth of Back River
- (6) Fill a broad berm in the Sediment Basin
- (7) Construct a sill in Middle River near Disposal Area 2A

- (8) Construct a boat ramp on Hutchinson Island
- (9) Construct a fish passage structure at the New Savannah Bluff Lock and Dam
- (10) Mitigate for striped bass (stocking)
- (11) Construct and operate a dissolved oxygen system
- (12) Restore brackish marsh in Disposal Area 1S
- (13) Recover data from the Ironclad CSS Georgia and other significant archaeological resources
- (14) Monitor and adaptively manage the river ecosystem

Enclosed, you will find one hard copy and one digital video disc (DVD). Pursuant to the Coastal Zone Management Act and the Fish and Wildlife Coordination Act, copies of this Draft EIS and GRR have been provided to the Office of Ocean and Coastal Resource Management Policy and Planning Division and the Bureau of Water Division. Comments should be provided no later than 45 days from the date of this letter to Mr. William Bailey, ATTN: PD, US Army Corps of Engineers, Savannah District, 100 West Oglethorpe Avenue, Savannah, Georgia 31401-3640 or by email to CESAS-PD@usace.army.mil.

Sincerely,

Jeffrey M. Hall
Colonel, US Army
Commanding

Enclosures

#22



Bureau of Water
2600 Bull St
Columbia SC 29201

Water Quality Certification

Applicant: US Army Corps of Engineers, Savannah District P/N: 2010 SHEP

Pursuant to R.101.C., Water Quality Certification, the SC Department of Health and Environmental Control (Department) will not consider your application complete for processing until you publish notice of the application in a newspaper and submit the required fee. In addition, the names and addresses of all adjacent property are required before your application is considered complete. Please be advised that other information may be required in order for the Department to determine if the application is deemed complete for processing. Details of the additional requirements follow:

1. **Public Notice:** Pursuant to R. 61-101, Water Quality Certification, a notice in the newspaper must contain information explaining the location, nature and extent of the proposed activity. The notice must indicate a fifteen (15) day comment period and be published in a newspaper of local or general circulation in the county where the activity is proposed to take place for one day. **You must provide SC DHEC with an affidavit of publication from the newspaper within fifteen (15) days of publication. You must publish the following notice and submit an affidavit of publication before SC DHEC can continue processing your application.**

PUBLIC NOTICE P/N: 2010 SHEP
(Applicant) has applied to the South Carolina Department of Health and Environmental Control for a Water Quality Certification to (Brief description of work) for (Public/Private) use in (Name and Location of Waterbody). Comments will be received by the South Carolina Department of Health and Environmental Control at 2600 Bull St, Columbia SC 29201-1797, Attn: Chris Beckham, Division of Water Quality until (Insert Date - 15 days from date of this notice).

2. **List of Adjacent Property Owners:** The Department requires a list containing the names and addresses of all property owners who own property adjacent to the project area.
3. **Fee:** Pursuant to R. 61-30, Environmental Protection Fees, the SC Department of Health and Environmental Control is authorized to collect application fees for Water Quality Certification. The following fee is now due to the Department of Health and Environmental Control:

US Army Corps of Engineers, Savannah District
Joint Public Notice Number: 2010 SHEP
Issue Date: November 15, 2010
Total Due: \$ 1,000.00

- The Department has 180 days to complete action on an application for 401 Water Quality Certification or the assessed fee must be returned. The 180 days includes only those days in which the application is actively being reviewed by the Department; the clock stops when information is requested and the SC Department of Health and Environmental Control is waiting on a response. **Accordingly, the 180 day clock will not start until we have received an affidavit of publication, the list of adjacent property owners, and the appropriate fee.**
- If you have questions regarding this 401 Water Quality Certification public notice requirement, please contact the Project Manager, Chris Beckham, at 803-898-4261 or other available 401 Water Quality Certification staff at 803-898-4300.

401 Water Quality Certification Application Fee

US Army Corps of Engineers, Savannah District
Joint Public Notice Number: 2010 SHEP
Issue Date: November 15, 2010
Total Due: \$ 1,000.00

Please return this page with your check (made payable to SC Department of Health and Environmental Control) and your affidavit of publication to:

SC Department of Health and Environmental Control
Bureau of Water
Attn: Chris Beckham, Project Manager
2600 Bull St
Columbia SC 29201-1797

DEACT
Paul C. Anglen, III
Comptroller
John H. Cooper, III
Vice Chairman
Susan G. Kerner
Secretary



DO/MS
Henry C. Sent
M. David Muddell, MD
Glenn A. McCall
Coleman F. Buckhouse, MD

December 3, 2010

Jeffrey M. Hall, Colonel, US Army, Commanding
US Army Corps of Engineers, Savannah District
100 West Oglethorpe Avenue
Savannah, Georgia 31401

Dear Colonel Hall:

The South Carolina Department of Health and Environmental Control (Department) is in receipt of the Joint Public Notice issued by the Savannah District on November 15, 2010, regarding the Notice of Availability of the Draft Environmental Impact Statement for the improvements and continued maintenance of the Savannah Harbor Federal Navigational Project. This notice announces that authorization is required from the Department in accordance with the South Carolina Coastal Zone Management Program and Section 401 of the Clean Water Act. The notice further provides for comment periods of 45 days for individuals interested in commenting on the Coastal Zone Management Consistency Certification and 60 days for commenting on the 401 Water Quality Certification respectively. It is also understood based on your November 4, 2010 letter to the Department, that these certifications will be required from the Department at the end of these public comment periods.

As the Department explained in our prior correspondence of September 29, 2010, this is an extremely complex project with significant implications for the State of South Carolina and we do not believe that this short period of time will allow us adequate time to receive public comment and review the application and all supporting documents. As you are aware, Section 401 of the Clean Water Act allows the State a reasonable period of time not to exceed one year to act upon an application for a 401 Water Quality Certification and the Department has determined that one full year is needed. Furthermore, the Federal Coastal Zone Management Act in 930.41(a) allows for 60 days for State concurrence and an additional 15 days pursuant to 930.41(b) if requested by the State in writing. Please take this letter as the Department's formal request under 930.41(b) for additional time to review this project. Furthermore, the Department has concerns about the appropriateness of a federal agency deeming an activity consistent with our Coastal Zone Management program based on a Draft EIS.

Please note that the Department would be required to deny these certifications if adequate time is not provided for complete review of this project.

Sincerely,

Earl Hunter, Commissioner
SC Department of Health and Environmental Control

CC: Robert (Bob) King, Deputy Commissioner, EQC
Carolyn Bollen-Kelly, Deputy Commissioner, OCRM
David Wilson, Chief, EQC Bureau of Water

SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
2500 Bull Street • Columbia, SC 29201 • Phone: (803) 896-3432 • www.scdhec.gov

DNR Historic
Preservation Div

2010 DEC -9 PM 2: 49

December 7, 2010



Mr. William Bailey
ATTN: PD
Corps of Engineers, Savannah District
100 W. Oglethorpe Ave.
Savannah, GA 31401-3640

Re: Savannah Harbor Deepening
Tier II Environmental Impact Statement, draft
Jasper County, South Carolina
SHPO Project No. 03-VM0063

Dear Mr. Bailey:

Thank you for your letter of November 15, which we received on November 17, regarding the above-referenced project. We also received a copy of the draft Tier II Environmental Impact Statement (DEIS) as supporting documentation for this undertaking. The State Historic Preservation Office is providing comments to the Corps of Engineers pursuant to Section 106 of the National Historic Preservation Act and its implementing regulations, 36 CFR 800. Consultation with the SHPO is not a substitution for consultation with Tribal Historic Preservation Offices, other Native American tribes, local governments, or the public.

As the proposed project will occur in both South Carolina and Georgia, we understand that all Section 106 consultation will be coordinated between our office and the Georgia State Historic Preservation Office (SHPO). Therefore, the comments in this letter only reference those portions of the overall project that have an area of potential effect (APE) in South Carolina.

Our office concurs with the determination in the DEIS on the "Previously Disturbed Areas within the Area of Potential Effect for which No Historic Property Investigations are Proposed" (sections 4.10.3 and 5.12.2). We understand that the following cultural resources investigations will be coordinated with our office:

- o Full-channel-width Dredging Area (SC waters)—Stations +41+500 to +49+500: Previous underwater archaeological survey identified two anomalies/targets that will be relocated and assessed for their eligibility for the National Register of Historic Places. These targets are SH-R16-2 and SH-R17N-1.
- o Meeting Areas (GA and SC Waters)—Stations +55+000 to +68+500: Two Confederate crib obstructions were identified in a 2005 underwater archaeological survey of this portion of the project. Our office concurs that these crib obstructions are eligible for listing in the National Register. It is not clear from the DEIS if these historic properties will be affected by the project. Additional consultation with our office is needed on this portion of the project.


- o New Savannah Bluff Lock and Dam Fish Ladder: The Corps will construct a fish ladder at the New Savannah Bluff Lock and Dam as part of the environmental mitigation of this project. The Corps will conduct a cultural resources survey prior to construction. Additional consultation with our office is needed on this portion of the project.

Our office concurs with the determination that the proposed Savannah Harbor Deepening project will have an adverse effect on the *CSS Georgia*, a Confederate naval vessel listed in the National Register and located in the waters of both Georgia and South Carolina. We also concur with the Corps' proposal to mitigate the adverse effects on the *CSS Georgia* by conducting data recovery and conservation of the ship and associated artifacts. A draft timeline of the steps in mitigation is included in the DEIS.

In preparation for this complex undertaking, our office consulted with the Corps of Engineers in 2005 and 2006 on a programmatic agreement designed to manage the effects to historic properties. We request that the Corps update our office and consult with us on a revised programmatic agreement that encompasses the studies and the revised project area.

We look forward to continuing to work with the Corps on this project. If you have any questions, please contact me at (803) 896-6183 or dobrasko@scdah.state.sc.us.

Sincerely,



Rebekah Dobrasko
Supervisor of Compliance, Tax Incentives, and Survey
State Historic Preservation Office

cc: Chris Amer, SCIAA
Barbara Neal, SCDHEC-OCRM
Dean Moss, Savannah River Maritime Commission
Elizabeth Shirk, GA SHPO



REPLY TO
ATTENTION OF:

DEPARTMENT OF THE ARMY
SAVANNAH DISTRICT, CORPS OF ENGINEERS
100 W. OGLETHORPE AVENUE
SAVANNAH, GEORGIA 31401-3640

Copy

Planning Division

DEC 17 2011

Mr. C. Earl Hunter
Commissioner
South Carolina Department of Health and Environmental Control
2600 Bull Street
Columbia, South Carolina 29201

Dear Mr. Hunter:

On November 15, 2010, the Savannah District, US Army Corps of Engineers distributed the Savannah Harbor Expansion (SHEP) Draft General Reevaluation Report (GRR) and Tier II Environmental Impact Statement (EIS) to incrementally evaluate deepening the Savannah Harbor Federal Navigation Project. Notice of these draft documents and a 45-day public comment period was published in the Federal Register on November 26, 2010. Based on this publication, the public comment period is scheduled to end January 10, 2011. Since the release of these documents, the Savannah District has received several requests to extend the public comment period. Based on these requests, the public comment period has been extended for an additional 15 days bringing the end of the comment period to January 25, 2011.

In addition, please attach a copy of the enclosed errata sheet inside the front cover of the GRR and EIS documents.

Should you have questions or comments please send them to my attention at: Savannah District, US Army Corps of Engineers, 100 West Oglethorpe Avenue, Savannah, Georgia 31401-3640 or by email to CESAS-PD@usacc.army.mil.

William G. Bailey

William G. Bailey
Chief, Planning Division

Enclosure

ERRATA SHEET

Savannah Harbor Expansion Draft GRR and EIS

Section 101 of the Water Resources Development Act of 1999 authorizes a project at a depth up to -48 feet subject to concurrence by the Secretaries of the Army, Commerce and Interior, and the Administrator of the Environmental Protection Agency (EPA). The Draft EIS described the potential impacts of all depths evaluated between -42 and -48 feet, as required by the legislation. Within the range of feasible depths, the -47 feet plan is the tentatively selected National Economic Development (NED) plan and complies with Army policy. The Maximum Authorized Plan of -48 feet is supported by the non-Federal sponsor. The final GRR and the EIS will contain a recommended plan agreed to by the Secretaries of the Army, Commerce, and Interior, and the Administrator of EPA.

References to the Maximum Authorized Plan of -48 feet were made in several places in the Draft GRR and EIS for describing the effects of the greatest, deepest alternative. These references should not be interpreted as a recommendation or preference for that alternative over the tentatively selected -47 feet NED. The following table identifies examples of references to the -48 feet alternative as indicated above. Again this is not an all inclusive list; therefore, this understanding applies to other locations throughout the draft GRR and EIS that use the nomenclature to describe the effects of the deepest alternative.

SHEP Draft GRR & EIS -48-feet Plan References		
<u>Report Section</u>	<u>Page Number</u>	<u>Section/ Paragraph</u>
GRR, Engineering Appendix	1	1,3
GRR, Real Estate Appendix	3	1
EIS	3-19	3.04
EIS	5-105	5.5.1



REPLY TO
ATTENTION: 31

DEPARTMENT OF THE ARMY
SAVANNAH DISTRICT, CORPS OF ENGINEERS
100 W. OGLETHORPE AVENUE
SAVANNAH, GEORGIA 31401-3640

Copy

Planning Division

DEC 1 1 2010

Mr. David Wilson
Bureau Chief
South Carolina Department of Health and Environmental Control
Bureau of Water
2600 Bull Street
Columbia, South Carolina 29201-1708

Dear Mr. Wilson:

On November 15, 2010, the Savannah District, US Army Corps of Engineers distributed the Savannah Harbor Expansion (SHEP) Draft General Reevaluation Report (GRR) and Tier II Environmental Impact Statement (EIS) to incrementally evaluate deepening the Savannah Harbor Federal Navigation Project. Notice of these draft documents and a 45-day public comment period was published in the Federal Register on November 26, 2010. Based on this publication, the public comment period is scheduled to end January 10, 2011. Since the release of these documents, the Savannah District has received several requests to extend the public comment period. Based on these requests, the public comment period has been extended for an additional 15 days bringing the end of the comment period to January 25, 2011.

In addition, please attach a copy of the enclosed errata sheet inside the front cover of the GRR and EIS documents.

Should you have questions or comments please send them to my attention at: Savannah District, US Army Corps of Engineers, 100 West Oglethorpe Avenue, Savannah, Georgia 31401-3640 or by email to CESAS-PD@usace.army.mil.

William G. Bailey

William G. Bailey
Chief, Planning Division

Enclosure

ERRATA SHEET

Savannah Harbor Expansion Draft GRR and EIS

Section 101 of the Water Resources Development Act of 1999 authorizes a project at a depth up to -48 feet subject to concurrence by the Secretaries of the Army, Commerce and Interior, and the Administrator of the Environmental Protection Agency (EPA). The Draft EIS described the potential impacts of all depths evaluated between -42 and -48 feet, as required by the legislation. Within the range of feasible depths, the -47 feet plan is the tentatively selected National Economic Development (NED) plan and complies with Army policy. The Maximum Authorized Plan of -48 feet is supported by the non-Federal sponsor. The final GRR and the EIS will contain a recommended plan agreed to by the Secretaries of the Army, Commerce, and Interior, and the Administrator of EPA.

References to the Maximum Authorized Plan of -48 feet were made in several places in the Draft GRR and EIS for describing the effects of the greatest, deepest alternative. These references should not be interpreted as a recommendation or preference for that alternative over the tentatively selected -47 feet NED. The following table identifies examples of references to the -48 feet alternative as indicated above. Again this is not an all inclusive list; therefore, this understanding applies to other locations throughout the draft GRR and EIS that use the nomenclature to describe the effects of the deepest alternative.

SHEP Draft GRR & EIS -48-feet Plan References		
<u>Report Section</u>	<u>Page Number</u>	<u>Section/ Paragraph</u>
GRR, Engineering Appendix	1	1,3
GRR, Real Estate Appendix	3	1
EIS	3-19	3.04
EIS	5-105	5.5.1



Bureau of Water
2600 Bull St
Columbia SC 29201

Public Notice # 2010-SHEP

Public Notice Date: December 30, 2010

**DEPARTMENT DECISION
NOTICE OF DEPARTMENT DECISION
WATER QUALITY CERTIFICATION AND
CONSTRUCTION IN NAVIGABLE WATERS PERMIT**

The South Carolina Department of Health and Environmental Control (Department), acting on an application for Water Quality Certification pursuant to Section 401 of the Federal Clean Water Act, and Construction in Navigable Waters Permit pursuant to R. 19-450, et. Seq., 1976 SC Code of Laws has reached a proposed decision for the project described below:

US Army Corps of Engineers, Savannah District
Savannah Harbor Expansion Project
Savannah River
Jasper County
P/N 2010 SHEP

Section 401 of the Clean Water Act allows the State a reasonable period of time not to exceed one year to act upon an application for a 401 Water Quality Certification. The Savannah District of the US Army Corps of Engineers (Corps) has notified the Department that the Water Quality Certification for this project must be received by the end of the public comment period in late January 2011. This time period is not adequate to conduct the necessary review to fulfill the regulatory obligations pursuant to Section 401 of the Clean Water Act; Department Regulation 61-101, Water Quality Certification; and Department Regulation 19-450, Permits for Construction in Navigable Waters.


The proposed project includes extensive environmental impacts that must be thoroughly reviewed by the Department. The public notice that was issued by the Corps on November 15, 2010, notes that the project violates water quality standards and the applicant proposes to mitigate for these impacts through a mechanical oxygenation system. The project could also potentially cause direct and indirect impacts to over 1,000 acres of wetlands. These impacts and the extensive mitigation proposal that is included in the draft EIS must also be reviewed by the Department. The Department must also determine if there are feasible alternatives that reduce the adverse consequences on water quality and classified uses. The timeframe imposed by the Corps prevents the Department from reviewing comments from the public and the resource agencies prior to noticing a decision on the project. Coordination with the resource agencies is necessary for the Department to determine if the project has the potential to impact waters containing Federally recognized rare, threatened, or endangered species. Because the Savannah District did not allow adequate time to acquire and consider all of the information necessary to conduct a thorough review of the project, the Department has not been able to determine if the project is consistent with the certification requirements of Section 401 of the Clean Water Act, and does not have a reasonable assurance that the proposed project will be conducted in a manner consistent with the certification

requirements of Section 401 of the Clean Water Act. Accordingly, the Department proposes to deny Water Quality Certification for the proposed project without prejudice.

A copy of the plans submitted by the applicant is available for review in the office of the Division of Water Quality, Bureau of Water.

Additional information about the technical aspects of this application is available from Chris Beckham, the project manager, at 803-898-4261.

The issuance of this Notice of Department Decision represents a final staff decision that may be appealed. Please see the attached page titled "Notice of Appeal Procedure" for details.

A handwritten signature in black ink, appearing to read "Chuck Hightower", is written over a horizontal line.

Chuck Hightower, Section Manager
Water Quality Certification and
Wetland Program Section

cc: US Army Corps of Engineers,
Charleston District Office
SCDHEC, Region 8 Offices
SCDHEC-OCRM, Charleston Office

Notice of Appeal Procedure
Pursuant to S.C. Code Section 44-1-60

1. This decision of the S.C. Department of Health and Environmental Control (Department) becomes the final agency decision 15 calendar days after notice of the decision has been mailed to the applicant or respondent, unless a written request for final review accompanied by a filing fee in the amount of \$100 is filed with the Department by the applicant, permittee, licensee, or affected person.
2. An applicant, permittee, licensee, or affected person who wishes to appeal this decision must file a timely written request for final review with the Clerk of the Board at the following address or by facsimile at 803-898-3393. A filing fee in the amount of \$100 made payable to SC DHEC must also be received by the Clerk within the time allowed for filing a request for final review. However, if a request for final review is filed by facsimile, the filing fee may be mailed to the Clerk of the Board if the envelope is postmarked within the time allowed for filing a request for final review.

Clerk of the Board
SC DHEC
2600 Bull Street
Columbia, SC 29201

3. In order to be timely, a request for final review must be received by the Clerk of the Board within 15 calendar days after notice of the decision has been mailed to the applicant or respondent. If the 15th day occurs on a weekend or State holiday, the request is due to be received by the Clerk of the Board on the next working day. The request for final review must be received by the Clerk of the Board by 5:00 p.m. on the date it is due. A request for final review will be returned to the requestor if the filing fee is not received on time as described above.
4. The request for final review should include the following:
 - a. the grounds on which the Department's decision is challenged and the specific changes sought in the decision
 - b. a statement of any significant issues or factors the Board should consider in deciding whether to conduct a final review conference
 - c. a copy of the Department's decision for which review is requested
5. If a timely request for final review is filed with the Clerk of the Board, the Clerk will provide additional information regarding procedures. If the Board declines in writing to schedule a final review conference, the Department's decision becomes the final agency decision and an applicant, permittee, licensee, or affected person may request a contested case hearing before the Administrative Law Court within 30 calendar days after notice is mailed that the Board declined to hold a final review conference.

The above information is provided as a courtesy; parties are responsible for complying with all applicable legal requirements.



REPLY TO
ATTENTION OF:

DEPARTMENT OF THE ARMY
SAVANNAH DISTRICT, CORPS OF ENGINEERS
100 W. OGLETHORPE AVENUE
SAVANNAH, GEORGIA 31401-3640

JAN 10 2011

Executive Office

Mr. Chuck Hightower
Water Quality Certification and Wetland Program Section, Section Manager
South Carolina Department of Health and Environmental Control
Bureau of Water
2600 Bull Street
Columbia, South Carolina 29201-1797

Dear Mr. Hightower:

The purpose of this letter is to address the proposed South Carolina Department of Health and Environmental Control (SC DHEC), Department Decision, Public Notice # 2010-SHEP, Public Notice Date: December 30, 2010.

In this proposed Department Decision, you indicated that SC DHEC proposes to deny, without prejudice, water quality certification for the Savannah Harbor Expansion Project (SHEP). The SC DHEC based its proposed decision on not having an adequate amount of time to acquire and consider all of the information necessary to conduct a thorough review in order to determine that the proposed project will be conducted in a manner consistent with the requirements of Section 401 of the Clean Water Act (CWA).

It appears that the proposed SC DHEC decision is based upon a misunderstanding concerning the pertinent time periods. I believe that SC DHEC may want to withdraw its proposed decision and not waive its obligations under Section 401 of the CWA.

The November 15, 2010 Joint Public Notice (JPN) and the November 26, 2010 publication of the Draft EIS and GRR in the Federal Register (FR) triggered two separate time periods under two different federal statutes. The JPN triggered a CWA time period and the FR notice triggered a National Environmental Policy Act (NEPA) time period.

Pursuant to the White House Council on Environmental Quality (CEQ) federal regulations that implement NEPA (40 C.F.R. § 1506.10(c)), the Corps must provide a minimum 45-day public comment period. Initially, the Corps set the closing date of the NEPA public comment period on January 10, 2011. Upon several requests, including one from SC DHEC, I extended the public comment period and agreed to accept comments until January 25, 2011. The time period established under NEPA is only intended to apply to comments on the Draft GRR and Draft EIS from the public and federal, state, and local agencies. Given the extensive public and resource agency involvement in this project over the past decade, this is a reasonable amount of time for the initial NEPA public comment period.


-2-

Under the CWA, SC DHEC has a reasonable period of time (which shall not exceed one year) to act on the Corps' request for water quality certification. The closing of the NEPA public comment period does not change the fact that SC DHEC has a reasonable period of time under the CWA to act on the Corps' request for water quality certification.

The Corps' request for Section 401 water quality certification under the CWA began on November 15, 2010, which was the date of the JPN. Please tell me what you consider to be a reasonable period of time for SC DHEC action, and when SC DHEC anticipates rendering a final determination on the Corps' water quality certification request.

We appreciate and look forward to our continued collaboration on this project with you, other federal and state resource agencies, and the public. If you have any questions, please let me know.

Sincerely,

A handwritten signature in black ink, appearing to read "Jeffrey M. Hall". The signature is fluid and cursive, with the first name "Jeffrey" and last name "Hall" being clearly legible.

Jeffrey M. Hall
Colonel, US Army
Commanding

CF:

Mr. Henry McMaster, Attorney General, State of South Carolina

Mr. Earl Hunter, Commissioner, SC Department of Health and Environmental Control

Clerk of the Board, SC Department of Health and Environmental Control

BOARD:
Paul C. Angier, III
Chairman
Edwin H. Conner, III
Vice Chairman
Steven C. Kiser
Secretary



C. Earl Turner, Commissioner

Promoting and protecting the health of the public and the environment

BOARD:
Henry C. Scott
M. David Mitchell, MD
Glen A. McCall
Coleman F. Buckhouse, MD

January 13, 2011

Jeffrey M. Hall, Colonel, US Army, Commanding
US Army Corps of Engineers, Savannah District
100 West Oglethorpe Avenue
Savannah, Georgia 31401

Re: Savannah Harbor Expansion Project

Dear Colonel Hall:

The South Carolina Department of Health and Environmental Control (Department) has received your letter dated January 10, 2011. In this letter, you suggested that the Department might want to withdraw its proposed decision on the Savannah Harbor Expansion Project (SHEP) and not waive its obligation under Section 401 of the Clean Water Act. The letter also asked that the Department tell you what we would consider a reasonable timeframe to make a decision on the project.

During a meeting of the Savannah Maritime Commission in September 2010, the US Army Corps of Engineers (Corps) announced that the project schedule for the SHEP allowed 60 days to obtain the Section 401 Water Quality Certification (Certification). Following this meeting, the Department sent a letter dated September 29, 2010, in which a request was made to allow additional time to complete the Certification for this project. In a letter dated November 4, 2010, you made note that the project schedule calls for the Certification to be obtained at the end of the public comment period in late January 2011. On November 15, 2010, the Corps issued the public notice for the draft Environmental Impact Statement (EIS) and concurrently submitted the application for the Certification. This public notice allowed the public 60 days to submit comments to the Department. Thus, in accordance with your November 4, 2010 letter, the Certification was to be obtained at the end of this 60-day time period.

In a subsequent letter, dated December 3, 2010, the Department informed you that the allotted time frame of 60 days was not adequate, and asked for a time period of one year to make a 401 Water Quality Certification decision on the SHEP project. The Department considers one year to be a reasonable period of time to review the multiple volumes of documents and reports that comprise the draft EIS and to provide for public input as required by S.C. Regulation 61-101, *Water Quality Certification*. Since the Department received no response to our request for additional time, the decision was made to move forward with the Notice of Department Decision published on December 30, 2010. Furthermore, this decision does not constitute a waiver of the Department's obligation under Section 401 of the Clean Water Act. Rather, this decision proposes to deny the 401 Water Quality Certification for the project. According to South

Carolina state law, this decision becomes final 15 days after it was mailed to the applicant, unless a timely appeal is received; however, since this proposal is to deny the project without prejudice, the Corps has the option to resubmit the application for a 401 Water Quality Certification.

Please do not hesitate to contact me at 803-898-0369, if I can be of further assistance.

Sincerely,

A handwritten signature in black ink, appearing to read "Chuck Hightower", with a long horizontal flourish extending to the right.

Chuck Hightower, Section Manager
Water Quality Certification & Wetlands Section



REPLY TO
ATTENTION OF:

DEPARTMENT OF THE ARMY
SAVANNAH DISTRICT, CORPS OF ENGINEERS
100 W. OGLETHORPE AVENUE
SAVANNAH, GEORGIA 31401-3640

January 13, 2011

Executive Office

Mr. Chuck Hightower
Water Quality Certification and Wetland Program Section, Section Manager
South Carolina Department of Health and Environmental Control
Bureau of Water
2600 Bull Street
Columbia, South Carolina 29201-1797

Dear Mr. Hightower:

In your letter, dated January 13, 2011, you said that South Carolina Department of Health and Environmental Control (SC DHEC) had not received a response from the Corps on your request for sufficient time to make a decision on water quality certification for the Savannah Harbor Expansion Project (SHEP). My letter of January 10, 2011, gave you that response by clearly stating that under the Clean Water Act (CWA), SC DHEC has a reasonable period of time (which shall not exceed one year) to act on the Corps' request for water quality certification.

In my previous letter, I asked you what you consider to be a reasonable period of time for SC DHEC action. In your current letter, you have said that SC DHEC considers one year a reasonable amount of time. The Corps' request for Section 401 water quality certification under the CWA began on November 15, 2010, which was the date of the Joint Public Notice (JPN). Accordingly, a reasonable period of time, which shall not exceed one year, won't expire until November 2011.

As I see it, SC DHEC can take until November 2011 as allowed by the CWA; or, SC DHEC can let the proposed Department Decision, Public Notice # 2010-SHEP, Public Notice Date: December 30, 2010 become final. I reiterate my position that SC DHEC withdraw its proposed decision and take the time allowed to act on the Corps' request for water quality certification.

We appreciate and look forward to our continued collaboration on this project with you, other federal and state resource agencies, and the public. If you have any questions, please let me know.

Sincerely,


Jeffrey M. Hall
Colonel, US Army
Commanding

CF:

Mr. Henry McMaster, Attorney General, State of South Carolina
Mr. Earl Hunter, Commissioner, SC Department of Health and Environmental Control
Clerk of the Board, SC Department of Health and Environmental Control

DEAPD:
Paul C. Angley, III
Chairman
Edwin H. Cooper, III
Vice Chairman
Steven G. Eiser
Secretary



Carl Hunter, Commissioner

Promoting and protecting the health of the public and the environment

BOARD:
Henry A. Scott
Mr. David Medel, MD
Glenn A. McCall
Coleman F. Rockhouse, MD

January 14, 2011

Jeffrey M. Hall, Colonel, US Army, Commanding
US Army Corps of Engineers, Savannah District
100 West Oglethorpe Avenue
Savannah, Georgia 31401

Re: Permit - Savannah Harbor Expansion Project (SHEP)

Dear Colonel Hall:

The South Carolina Department of Health and Environmental Control (Department) received your letter dated January 13, 2011. As you are aware, the Department issued a Notice of Department Decision on December 30, 2010, in which we proposed to deny the 401 Water Quality Certification for the SHEP due to the fact that the time provided for Department review was inadequate. In your recent letter, you state that the Corps' request for 401 certification under the Clean Water Act began on November 15, 2010, and that "SC DHEC can take until November 2011" to provide its 401 certification in this matter. The Department also confirmed with you in a January 14, 2011, telephone conversation that the project schedule now provides for the November 2011 date for the 401 certification decision.

Based on this new information, the Department hereby rescinds the Notice of Department Decision dated December 30, 2010, for the above-referenced permit. The Department will continue to process the permit application with the new 401 certification timeframe expiring November 2011.

Please do not hesitate to contact me at 803-898-0369, if I can be of further assistance.

Sincerely,

Chuck Hightower, Section Manager
Water Quality Certification & Wetlands Section
SCDHEC - Bureau of Water



C. Earl Hunter, Commissioner

Promoting and protecting the health of the public and the environment

January 21, 2011

Jeffrey M. Hall, Colonel, US Army, Commanding
US Army Corps of Engineers, Savannah District
100 West Oglethorpe Avenue
Savannah, Georgia 31401

Re: Savannah Harbor Expansion Project (SHEP)

Dear Colonel Hall:

I am writing you to determine whether the Department of the Army, Savannah District, Corps of Engineers letter dated, January 13, 2011, allows the South Carolina Department of Health and Environmental Control Office of Ocean and Coastal Resource Management (SCDHEC OCRM) additional time to review the SHEP DEIS for consistency with the South Carolina Coastal Zone Management Program. The Savannah District - COE response allows for SCDHEC to have until November 2011 to conduct its review as allowed by the Clean Water Act. Does this timeframe also apply to the concurrence of the consistency determination by SCDHEC OCRM?

If the consistency review is not included, I am requesting that you allow more time for SCDHEC OCRM to conduct a thorough review of the DEIS pursuant to Federal Regulation Part 930.42(b). Specifically, this regulation states "In considering whether a longer or additional extension period is appropriate, the Federal agency should consider the magnitude and complexity of the information contained in the consistency determination." Given the complexity and the magnitude of the documentation provided in the DEIS, the SCDHEC OCRM feels that 75 days (60 + 15 day extension previously requested in a December 3, 2010, letter to you) is not a sufficient amount of time to review the document. SCDHEC OCRM requests that you offer the same amount of time for review of the DEIS for consistency with the South Carolina Coastal Zone Management Program as you have allowed for the review for DHEC's water quality Certification program.

I look forward to your response. If you would like to discuss this issue or have any questions, please contact Blair Williams of my staff at (843) 953-0232.

Sincerely,

Carolyn Babin-Kelly, Deputy Commissioner
Office of Ocean and Coastal Resource Management

cc: William G. Bailey, Corps of Engineers, Savannah District
Heather Preston, SCDHEC BOW

SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
Ocean and Coastal Resource Management

Charleston Office • 1362 McMillan Avenue • Suite 400 • Charleston, SC 29405 • Phone: (843) 953-0200 • Fax: (843) 953-0201 • www.scdhec.gov



United States Department of the Interior

OFFICE OF THE SECRETARY
Office of Environmental Policy and Compliance
Richard B. Russell Federal Building
75 Spring Street, S.W.
Atlanta, Georgia 30303



ER 10/1039
9043.1

January 21, 2011

Colonel Jeffrey M. Hall
U.S. Army Corps of Engineers
Savannah District
100 W. Oglethorpe Avenue
Savannah, Georgia 31401-3640

RE: Savannah Harbor Expansion Project, General Reevaluation Report (GRR) and Draft Tier II Environmental Impact Statement (DEIS)

Dear Colonel Hall:

The Department of the Interior (Department) has reviewed the subject documents. The Savannah Harbor Expansion Project (SHEP) involves deepening the harbor from the current inner harbor depth of 42 feet by as much as 6 feet to a maximum authorized depth of 48 feet. Authorizing language in the Water Resources Development Act of 1999 stipulates that the project may proceed only after the Secretary of the Interior, Secretary of Commerce, and Administrator of the Environmental Protection Agency approve the selected plan and determine that the associated mitigation plan adequately addresses its potential environmental impacts. The subject documents describe various models that were developed to predict changes to the environment resulting from alternative channel depths and mitigation measures. Predicted changes to the environment include: salinity increases, loss of tidal freshwater marsh, reduced striped bass reproduction and recruitment, negative impacts to shortnose sturgeon habitat, reduced dissolved oxygen (DO), and potential exposure of wildlife to cadmium in dredged sediments.

General Comments

Plan Selection

The Corps of Engineers' (Corps) analysis shows that incremental net economic benefits of the alternatives are maximized at a depth of 45 feet, decrease from 45 to 47 feet, and are negative at 48 feet. The 47-foot depth provides the greatest total net economic benefits and is identified as the national economic development (NED) plan. The maximum authorized depth of 48 feet is the locally preferred plan (LPP) of the non-Federal cost share sponsor, the Georgia Ports Authority. The additional economic benefits of the LPP relative to the NED plan (about 1 percent more), but higher costs (about 6 percent more), represent negative incremental net benefits. The DEIS states the tentatively recommended plan is either the 47-foot alternative (NED plan) or the 48-foot alternative (LPP), although three other federal agencies must approve final plan selection and have expressed reservations about the deeper alternatives.

The Department's preferred plan for deepening Savannah Harbor is the 45-foot depth alternative, because it minimizes the loss of freshwater tidal wetlands, impacts to Savannah National Wildlife Refuge (NWR), and risk and uncertainty of impacts to trust fish and wildlife resources. Previous channel deepening projects have reduced tidal freshwater marsh within the Savannah River estuary from about 12,000 acres to about 3,300 acres. The majority of the remaining freshwater tidal wetlands occur on Savannah NWR. Further deepening the channel from its present depth of 42 feet would further reduce this important and increasingly rare national resource. At the NED plan depth (47 feet), a net loss of 223 acres of tidal freshwater wetlands is predicted after flow-diversion mitigation is implemented. At the LPP depth (48 feet), a net loss of 337 acres of tidal freshwater wetlands is predicted after flow-diversion mitigation is implemented. The loss of an additional 114 acres of freshwater tidal wetlands associated with the LPP would represent a 50 percent increase in impacts to the Savannah NWR over the NED plan and a cumulative loss of approximately 10 percent of the basin's remaining freshwater tidal wetlands. For this reason, the Department does not support the LPP.

Sea Level Rise

The potential effect of sea level rise on wetland habitats is mentioned throughout the DEIS. The document discusses drought, sea level rise, and channel deepening, but does not analyze the interaction between these major influences. In Appendix C (Mitigation Planning) and elsewhere in the DEIS, the Corps suggests that if the rate of sea level rise exceeds the historic rate, the proposed compensatory mitigation (e.g., land additions to the Savannah NWR for the loss of 223 acres of freshwater tidal wetlands under the NED plan) would overcompensate project impacts, because some of those acres would have converted to brackish or salt marsh without the project. The Corps proposes to reassess sea level rise effects in the future and assign "advance mitigation" credits to the project for use with future actions. The Department objects to this proposal, because sea level rise would have a negligible impact in the upper estuary if not for the cumulative impacts of previous harbor deepening. The rate of sea level rise is uncertain and substantial impacts resulting from sea level rise are likely well into the future. Conversely, the impacts of further harbor deepening will begin almost immediately. In addition, due to the complexity of the system and limitations of the models, the Department has concerns that the models may underestimate wetland impacts. The Department regards "advance mitigation" in this context as the functional equivalent of a mitigation bank, and U.S. Fish and Wildlife Service (FWS) Mitigation Policy (64 FR 49229-49234) does not allow the use of NWR lands for mitigation banks to compensate for the effects of activities authorized by the Department of the Army under Section 10 of the Clean Water Act and Section 10 of the Rivers and Harbors Act. Therefore, the Department does not support the concept of advance mitigation based on a future evaluation of the relative impacts of sea level rise. We do support, however, obtaining a waiver in this instance from the Corps' policy to implement the agency-coordinated level of mitigation for the base year (the year construction is completed) impacts, rather than mitigating for the project's average annual impacts or reassessing sea level rise impacts in the future.

Monitoring/Adaptive Management

Assuring the effectiveness of the mitigation features proposed in the DEIS is essential to the Department's approval of the selected project plan. These features were developed using pre-construction data and models to predict potential effects to the estuary. The DEIS states that natural variation alone will nearly guarantee that conditions during the first few years after construction are different from those under which the models were first calibrated. Currently, the Monitoring and Adaptive Management Plan proposes 5 years post-construction monitoring of key mitigation features, which we believe is not long enough. It is the Department's position that 10 years post-construction monitoring is necessary for the adaptive management process to

work; i.e., to ensure that impacts to natural resources in this complex system resulting from project construction are limited to those predicted. Further, the Department recommends a more precise definition of observed conditions that would prompt changes to the mitigation features, and a time-line for making decisions and taking corrective actions thereafter. The Department is also concerned that funding for adaptive management will depend upon the Corps' annual appropriations process. It is relatively certain that impacts to trust resources of the Department will occur following construction, but the effectiveness of the mitigation features is much less certain. Therefore, the Department cannot agree that the proposed mitigation adequately addresses project impacts unless contingency funding for monitoring and adaptive management is assured.

The Department is concerned about the reliance on the hydrodynamic and water-quality models in the Adaptive Management Plan (AMP, Appendix D). The Plan does not include ecological performance measures to independently evaluate the effectiveness of the mitigation for the deepening of the Savannah Harbor. The models were developed to evaluate potential resource impact from deepening and to evaluate various mitigation actions to minimize environmental degradation of valued resources. The mitigation plan results in major changes to flow dynamics of the Lower Savannah River Estuary. Six of the seven mitigation features involve alterations to flow paths. The expected result of the mitigation is that the post-construction ecosystem will function in a similar manner to the pre-construction ecosystem. The monitoring data, along with ecological performance measures, should be used to evaluate the effectiveness of the mitigation features.

The AMP does not include ecosystem performance measures for the majority of the resources that the mitigation is trying to protect. The only ecological performance measure found was for the re-vegetation of Area 1S. For the other resources, the Corps proposes to use a modified version of the draft Federal Expectation for Hydrodynamic and Water-Quality Model Calibration and Confirmation performance measures. The intent is to collect additional data, simulate pre- and post-project scenarios with the models, evaluate the calibration of the models, re-calibrate the models (if necessary), and then evaluate the effectiveness of the mitigation.

It is not clear in the AMP how the draft Federal Expectation for Hydrodynamic and Water-Quality Model Calibration and Confirmation performance measures equates to ecological performance measures. The hydrodynamic and water-quality models currently do not meet these model calibration goals in many areas of the system (see Tetra Tech, 2006; Appendices B-K, P, and Q). If the current models do not meet the calibration performance goals, how will evaluating the model calibration performance for the post-project inform resource decision makers if the ecosystem is being protected by the mitigation features?

It is important to perform a post audit of the models to better assess their predictive capacity and uncertainties. Model calibration goals are not the same as ecological performance measures. By relying solely on the post audit of the models for the evaluation of the mitigation, an opportunity for utilizing the tremendous amount of data and analysis that were used to develop the DEIS is not being realized. The development of the DEIS involved tremendous amounts of data collection and analysis of various resources that needed protection. These data and analyses should be used in developing ecosystem performance measures. The ecosystem performance measure could be expressed as the magnitude, duration and frequency of the parameter of interest and appropriate thresholds for actions by resource agencies.

There are references in the Plan of the using the monitoring data to show if "...impacts are occurring beyond the range of those expected" and the monitoring data "...will be useful in identifying whether any impacts are occurring beyond the range of those expected" (p. 27). The expected range of impacts was never defined in the AMP. At every sampling and gaging location for a resource of concern, an ecological performance measure should be developed to define the expected ecosystem response to the deepening mitigation.

There is currently a network of 12 real-time gages that collect water level, velocity, specific conductance, and (or) temperature. Many of these stations have been collecting data since the most recent deepening in 1994. The AMP outlines additional stations that will be added to the network. These data, along with discrete sampling data, and ecological performance measures can be analyzed directly to evaluate the effectiveness of the mitigation features.

Many of the funding figures appear to be inconsistent between sections of the AMP and between the AMP and the GRR. For example, chloride sampling is listed at \$100,000 on page 18 and \$80,000 on page 24, marsh data collection is listed at \$18,000 on page 17 and \$20,000 on page 24, and long-term monitoring is listed at \$347,000 on page 37 and \$428,400 in the GRR.

Cadmium

Procedures for disposing of sediments that contain cadmium concentrations exceeding 14 parts per million (ppm) are discussed in three parts of the DEIS: 1) Section 5.4.2.2; 2) Appendix D - Monitoring and Adaptive Management; and 3) Appendix M - Sediment Quality Evaluation. These discussions are unclear and inconsistent. In particular, we recommend clarifying the proposed cadmium monitoring program. The Department recommends a program of monitoring wildlife activity in disposal areas and cadmium levels in bird tissues that is independent of the Dredge Material Containment Area (DMCA) capping criteria. Wildlife monitoring should begin with sediment placement and continue as long as all other monitoring of the DMCA. Tissue monitoring should occur: 1) prior to sediment placement to collect baseline data; 2) during sediment placement; and 3) post placement until 3 consecutive years of samples contain cadmium concentrations that are less than the potential adverse effect level, which is to be determined. The Department supports the sampling protocol (species and timing) described in Appendix D, page 23; and requests that the Corps continue to coordinate with the FWS prior to completion of the final EIS to finalize plans for biological monitoring within DMCAs, including tissue sampling.

The Department accepts the Corps' use of 4 ppm cadmium concentration in capping material as a trigger for remedial action in DMCAs. The Department understands that the Corps will move a DMCA to higher priority in the rotation for Operations and Maintenance (O&M) sediment placement and vegetation monitoring if 25 cumulative acres are found to have a cadmium concentration greater than or equal to 4 ppm. Sampling and placement will continue until the DMCA has less than 25 cumulative acres with a cadmium concentration greater than or equal to 4 ppm.

Risk and Uncertainty Analysis

The Savannah estuary is a complex system and predicting how this system may respond to substantial physical alterations (channel deepening, flow diversions, etc.) is fraught with uncertainties, which are well acknowledged within the DEIS. However, based on an analysis prepared by Kinetic Analysis Corporation (KAC), the DEIS concludes that the hydrodynamic model probably over-predicts salinity and under-predicts dissolved oxygen; i.e., the model errs towards the side of simulating conditions worse than would actually occur. We believe this

analysis may seriously misrepresent the risk associated with the water quality predictions. It is quite possible that the hydrodynamic model does not predict worst-case conditions. With the exception of the new channel depth, the KAC analysis relied upon the existing geometry of the Savannah River estuary. Several mitigation measures would significantly modify the system geometry, including significant flow diversion at McCoys Cut, closing Rifle Cut, filling the Back River sediment basin, and removing the tide gate. Flow routing and flow volume in the three main river channels would become significantly different from the current system. Therefore, we believe the degree of risk and uncertainty regarding expected water quality impacts, and in turn, wetland impacts, is considerably higher than the KAC analysis suggests. For this and other reasons, the Department recommends extending the proposed post-construction monitoring from 5 years to 10 years.

Specific Comments

Abstract

Page 1. The first paragraph of the Abstract discusses channel depths and then states that 70% of vessels do not call on Savannah at their maximum capacity or design draft, which implies that all light-loading is due to channel depth limitations. The Corps should include information on the percentage of vessels with loads constrained by channel depth and the percentage of light-loading due to other factors, such as prior calls at other ports. Additionally, the DEIS should include the predicted percentage of ships that will call on the port fully loaded or leave fully loaded if the channel is deepened.

Section 3, Alternatives

3.05, Tentatively Recommended Plan, page 3-22. The first paragraph of this section states that the tentatively recommended plan is either the 47-foot alternative or the 48-foot alternative. The third paragraph describes the tentatively recommended plan as the 48-foot alternative. The Errata Sheet of December 17, 2010, states that various references to the 48-foot alternative throughout the GRR and DEIS “should not be interpreted as a recommendation or preference for that alternative over the tentatively selected -47 feet NED [plan].” On September 9, 2010, the FWS provided comments on preliminary drafts of the GRR and DEIS, identified -45 feet as its preferred alternative for deepening the harbor and stated it did not support the 48-foot alternative. The final EIS will necessarily need to revise this section to discuss the multi-agency rationale for what is ultimately determined as the final plan selection.

3.11, Future Conditions Without the Project, page 3-29. This section states that 70% of vessels do not call on Savannah at their maximum capacity or design draft, which implies that all light-loading is due to channel depth limitations. The Corps should include information on the percentage of vessels with loads constrained by channel depth and the percentage of light-loading due to other factors, such as prior calls at other ports. Additionally, the DEIS should include the predicted percentage of ships that will call on the port fully loaded or leave fully loaded if the channel is deepened.

Section 4, Affected Environment

4.01.2, Geology, page 4-7. The amount of dredged material by station for both inner harbor and outer harbor do not match between Section 3 (Table 3-8, pg. 3-27; Table 3-9, pg. 3-28) and

Section 4 (Table 4-4, pg. 4-7; Table 4-5, pg. 4-7). The Department recommends corrections for clarity.

4.02.4, Surface Water, pages 4- 13-14. The discussion on DO standards is confusing. The new DO standard established by the State of Georgia is not less than 5.0 mg/L throughout the year with an instantaneous minimum of 4.0 mg/L. A number of site-specific DO standards are listed. For clarity, this section should explain how the new standard of 5.0 mg/L compares to the measured monthly ranges of DO in the Savannah River at the currently authorized depth of 42 feet.

4.04, Marine and Estuarine Resources, page 4-20. This section states that optimum striped bass spawning success requires salinity less than 1.7 ppt. Studies on the Savannah River indicate that striped bass spawn almost exclusively in areas where maximum salinity near the surface is less than 1.0 ppt. The Department recommends revision to state salinity of less than 1.0 ppt is optimum.

4.06, Invasive Species, page 4-43. This section should discuss the common reed (*Phragmites australis*) as an invasive species. The document states elsewhere (page 4-55, section 4.07) that common reed will probably dominate the confined disposal facilities (CDFs). We believe that the common reed in the CDFs is the invasive strain. According to the U.S. Geological Survey (USGS), the invasive strain originated in Europe and was possibly spread via ships' ballast. Section 5 of the final EIS should evaluate the potential for the invasive strain to crowd out native species in marshes adjacent to the CDFs.

4.06, Invasive Species, page 4-43, (2nd Comment). This section addresses only one pathway, ballast water, for introduction of aquatic invasive species. Introduction of invasive species in the Savannah Harbor, both aquatic and terrestrial, is not limited to ballast water. Insects in pallets, or plants and seeds in soil on containers, are two examples of other pathways. Invasive species can dramatically alter an ecosystem, which is a major concern for the Savannah NWR. This section should address other pathways and terrestrial systems as well as aquatic systems.

4.07, Terrestrial Resources, page 4-47. The Savannah NWR is 29,175 acres, not 25,600 acres.

4.08, Wetlands and Floodplains, page 4-62. This section refers to a 1992 Planning Aid Report, but the FWS report in question is dated September 16, 1982.

Section 5, Environmental Consequences

5.1.1.1, Impacts from Excavation of Wetlands, page 5-1. The text states that the first two entries in Table 5-1 are Refuge lands, but the table labels the first three entries as Refuge lands. Figure 5-1 is illegible, but appears to depict the Kings Island Turning Basin along with another area for dredging. It is unclear where the third area of excavation is located (we believe 96+000 to 97+000). Figure 5-2 appears to depict the non-Refuge portion of excavation from 86+000 to 88+500, but it too is unclear. A proximity map would help locate these areas in relation to the Savannah NWR.

5.1.1.2, Impacts from Excavation of Wetlands, page 5-6. The discussion in the opening paragraph references Figure 5-52 as CDF 1S; however, Figure 5-52 is a picture of Old Fort Jackson (on p. 5-134). We believe the correct reference is to Figure 5-4 on page 5-7.

5.1.1.2, Impacts from Excavation of Wetlands, page 5-6 (2nd comment). The Corps proposes to restore up to 45 acres at Area 1S on the Savannah NWR, using 14.5 acres as “advance mitigation” for direct impacts to salt marsh. These impacts include widening channel bends and turning basins both on and off the Savannah NWR. “Advance mitigation” is the functional equivalent of a mitigation bank. FWS Mitigation Policy (64 FR 49229-49234) does not allow the use of NWR lands for mitigation banks; therefore, the Department cannot support the 14.5 acres as “advance mitigation.”

5.1.1.2, Impacts from Excavation of Wetlands, page 5-6 (3rd comment). This section discusses wetland restoration on site 1S. Successful wetland restoration is dependent on three primary factors: soil, hydrology and vegetation. The proposed dredged material removal should expose the original wetland soil and restore the site to the elevation of adjacent marshes. Construction of a “feeder” creek system toward the interior of the restoration site from Middle River will facilitate tidal exchange; however, if restored elevations do not properly restore tidal flow, invasive vegetation with almost no wildlife value may occupy the site. The desired vegetation outcome on the site is to establish a mixed brackish marsh, similar to adjacent marsh. Chinese tallow tree and common reed, both highly invasive exotic species, have been identified in the marshes near the restoration site. Monitoring the success of the re-vegetation for 5 years should include control measures for exotic and invasive species, if detected.

5.1.2.1 Indirect Impacts to Wetlands, page 5-9. This section references a USGS report, by the Cooperative Research Unit, titled “Simulation of Water Levels and Salinity in the Rivers and Tidal Marshes in the Vicinity of the Savannah National Wildlife Refuge, Coastal South Carolina and Georgia” but does not provide the reference. Suggest the Final EIS include the reference (Conrads et al, 2006) in the text and in the References section.

5.1.2.1 Indirect Impacts to Wetlands, page 5-10: This section states “In March 2007, the Federal Cooperating Agencies discussed a USGS proposal to revise the linkage to increase its usefulness for evaluating potential mitigation measures.” but the proposal was rejected. Suggest the Final EIS include a short explanation, and relevant information, on how this decision was reached.

5.1.2.2, Indirect Impacts to Wetlands, page 5-12. This section states that the primary stress to tidal freshwater marsh is prolonged drought, which is not supported by evidence. In 1875, when the controlling depth of the navigation channel was 12-15 feet, the Savannah estuary supported an estimated 12,000 acres of tidal freshwater marsh. In 2005, when the controlling depth was 42 feet, the estuary supported only 3,269 or 4,072 acres (depending on study method used). This section should instead state that the inland intrusion of salt water resulting from channel deepening is a constant stress on tidal freshwater marsh, and that prolonged drought exacerbates this stress.

5.1.2.2, Indirect Impacts to Wetlands, page 5-13. This section states the Corps evaluated the effects of sea level rise on tidal freshwater marsh. The Department maintains that sea level rise would have a negligible impact on the Savannah NWR if not for the cumulative impact of previous harbor deepening.

5.1.2.3, Mitigation – Flow Routing, page 5-29. This section examines various alterations to rivers and creeks to reduce the impacts to tidal freshwater marsh. It states that the proposed mitigation for the 47-foot alternative is predicated on a “base year” (immediately following construction) impact of 223 acres instead of a project-life average annual impact consistent with

Corps policy. The average annual impact is lower than 223 acres due to the effect of sea level rise during the next 50 years that would occur without the project. The Department maintains that sea level rise would have a negligible impact on the Savannah NWR if not for the cumulative impact of previous harbor deepening. Therefore, we support obtaining a waiver from the Corps' policy in this instance to instead implement the agency-coordinated level of mitigation.

5.2.1, Water Quality, Dissolved Oxygen, pages 5- 37-39. This section should compare the modeled DO levels in the Savannah River under the LLP and NED depth plans with the State of Georgia's DO standard. The new Georgia DO standard is not less than 5.0 mg/L throughout the year, with an instantaneous minimum of 4.0 mg/L.

5.2.3 Chloride Concentrations, page 5-54: The document states the "The Corps had an Independent Technical Review performed of the chloride model by a staff member of the USGS in Columbia, SC. The reviewer expressed about the ability of the model to make reliable predictions at the low chloride concentrations occurring at the City's intake." Suggest the Final EIS explain "what" the reviewer expressed and include documentation of the reviewer's expertise.

5.2.5, Contingency for City of Savannah Water Intake System, page 5-60. This section describes a secondary (supplemental) water supply intake line for the City of Savannah to be constructed if needed. Based on a preliminary review, the Department would prefer intake Site 1, because intake Site 2 is likely to adversely affect more wetland and wildlife habitat. The Department requests further coordination to evaluate impacts and make recommendations if the supplemental intake site is needed in the future.

5.3.2. B, Mitigation to Impacts to Fisheries, page 5-96. The Corps proposes to fund a stocking program for striped bass based on the amount of spawning and early life stage habitat lost due to water quality changes resulting from harbor deepening: *"the extent of the stocking needed could be reduced to the amount of habitat predicted to be impacted by the project. Thus, the percentage of habitat loss could be multiplied by the cost for a full-scale stocking program to determine the amount that would be sufficient to compensate for the habitat loss that is expected."* The expected loss of habitat is 2.9% for the 45-foot alternative and 26.9% for the 47-foot alternative. The final EIS should include a proposal to monitor/measure post-construction loss of striped bass habitat. The final adaptive management plan should address striped bass, and if habitat loss exceeds the amount predicted, include provisions and assurances to increase stocking funds accordingly.

5.4.2.2, Sediment Quality Evaluation, pages 5-100-101. This section should clarify whether the Corps intends to collect 30 or 86 sediment samples per DMCA. The Department has previously stated a concern that 30 samples are not enough. The Corps proposes taking samples 15 cm deep; the Department recommends 86 samples of the cap material per DMCA taken 30 cm deep. The DEIS sometimes refers to 7 ppm of cadmium in the capping material to trigger remedial action. The Department recommends substituting a threshold of 4 ppm throughout the DEIS for clarity. This section should fully summarize bird tissue monitoring, which is partially summarized in Appendix D, page 23, and Appendix M, page 84. The Department understood that the Corps had agreed to bird tissue monitoring independent of monitoring cadmium soil concentration levels. Tissue monitoring should occur: 1) prior to sediment placement to collect baseline data; 2) during sediment placement; and 3) post placement until 3 consecutive years of samples contain cadmium concentrations that are less than the potential adverse effect level.

which is to be determined. The Department requests that the Corps continue to coordinate with the FWS prior to completion of the final EIS to finalize plans for biological monitoring within DMCA's, including tissue sampling.

5.5, Groundwater, page 5-105. Groundwater conditions were simulated with a constant pumping rate 200 years into the future to estimate the timing of sea water intrusion into the Upper Floridan Aquifer. The DEIS states elsewhere that Chatham and Effingham counties are experiencing population growth, and it is reasonable to assume that industrial water use may also increase with the potential harbor expansion. For the final EIS, the Department recommends revisiting the groundwater simulations with consideration of likely increases in pumping rates.

5.7, Marine and Estuarine Resources, pages 5-109-113. This section discusses direct dredging impacts and generally concludes that expected impacts are minor. However, the text does not describe the long-standing striped bass spawning season window that restricts dredging and is likely largely responsible for the minor impacts conclusion. On Page 14 of Appendix H is a statement that hydraulic dredging is not conducted in Savannah Harbor during the striped bass spawning season. The Corps should revise Section 5.7 and other relevant sections to discuss the striped bass spawning window, and describe where and when hydraulic harbor deepening dredging is restricted.

5.7.1.1, Direct Dredging Impacts, page 5-110. The flow of the Savannah River is highly variable within and between years; therefore the Corps should specify the period of record used for the following calculation: *"the average daily freshwater flow in the Savannah River at Clya is about 11,290 cfs."* The analysis presented in this paragraph should use data that represents the seasonal timing and flow conditions typical during channel maintenance operations, and if necessary, revise the conclusions based on this analysis.

5.21.1, Other Items/Factors of Concern, page 5-156. This section covers the introduction of invasive species through ballast water, but should also address other pathways through ports, such as insect larva in pallets (e.g., red bay ambrosia beetle), or seeds and plants 'hitchhiking' in soil on containers.

5.22, Mitigation, page 5-157. The Department disagrees with this statement: *"The Corps believes that with implementation of the Mitigation Plan and Monitoring and Adaptive Management Plan, the proposed action would not have significant adverse impacts on the environment."* Under the 47- and 48-foot alternatives, which the Corps identifies as the tentatively recommended plans, the Savannah estuary would lose an estimated 223 and 337 acres of tidal freshwater marsh, respectively. We have identified loss of tidal freshwater marsh as the *"most important impact criterion in the Savannah Estuary"* (page 5-10). In-kind mitigation for this loss is not possible; therefore, significant adverse impacts remain even with implementation of the mitigation plan for the 47- and 48-foot alternatives. This is why the Department prefers the 45-foot alternative among the action alternatives, because it minimizes the loss of freshwater tidal wetlands, impacts to Savannah National Wildlife Refuge (NWR), and risk and uncertainty of impacts to trust fish and wildlife resources.

Appendix B, Biological Assessments for Threatened and Endangered Species

Section 8.02.4 – Impacts to Federally Listed Threatened and Endangered Species, West Indian Manatee, page 83. Manatees have been observed on the Savannah NWR since 1987. Six manatees were observed on the Savannah NWR on August 26, 2010, at a rice trunk on the Wildlife Drive. This area is directly across from Port Wentworth on the Back River. In

September of 2008, four manatees were found in the Savannah River (Front River) downstream of the Georgia Ports Authority Ocean Terminal that had been killed in a ship-related incident. This section states that manatee occurrence in the area is rare. Manatees have site fidelity to summer habitat sites, therefore, the FWS would expect the six observed on the Savannah NWR to return. The Georgia Department of Natural Resources (GADNR) has data on manatee mortality and public sightings in the Savannah River. From FWS personnel's observations and discussions with the GADNR, the FWS would not characterize manatee occurrence as rare. Usage is regular enough to characterize manatee occurrence in the Savannah River estuary as a small summer resident population.

Appendix C, Mitigation Planning

IV.A. Reducing Impacts – Hydrodynamic and Water Quality Modeling, page 30. This section states that the proposed mitigation for the 47-foot alternative is predicated on a "base year" (immediately following construction) impact of 223 acres instead of a project-life average annual impact consistent with Corps policy. The average annual impact is lower than 223 acres due to the effect of sea level rise during the next 50 years that would occur without the project. The Department maintains that sea level rise would have a negligible impact on the Savannah NWR if not for the cumulative impact of previous harbor deepening. Therefore, we support obtaining a waiver from the Corps' policy in this instance to instead implement the agency-coordinated level of mitigation.

IV.D. Reducing Impacts – Improvements to Dissolved Oxygen, page 39. The MACTEC engineering firm's report on the test of a DO injection system concluded that the system could improve a DO deficit by 0.6-0.7 mg/l. An independent peer review by USGS found that this conclusion was not supported by the data. The USGS review found instead that the natural tidal cycle accounted for most of the variation in DO levels during the demonstration. This section of the final EIS should address the USGS report. The uncertainty regarding the results of the efforts to improve DO deficiencies is additional justification for expanding the water quality monitoring efforts from 5 to 10 years.

V.A. Replacement /Compensation – Restoration/Enhancement/Creation, pages 48-50. The acreages mentioned on these pages do not correspond with those found in other places in the DEIS. Pages 48 and 50 mention 15.68 acres of brackish marsh lost, while DEIS sections 5.1.1.1 and 5.1.1.2 mention 14.08 acres. Appendix C, pages 49 and 50 state the restoration area is 45 acres, while page 49 states the restoration area is 42 acres. Figure 19 on page 49 depicts two restoration areas of 34 and 8 acres for a total of 42 acres. Section 5.1.1.2 page 5-6 states the restoration area is 42 acres. The Department recommends correcting any mistakes in these sections or explaining the apparent inconsistencies.

This section discusses wetland restoration on site 1S for direct impacts to brackish marsh. The desired vegetation outcome is to establish a mixed brackish marsh, similar to adjacent marsh, on the site. Chinese tallow tree and common reed, both highly invasive exotic species, have been identified in the marshes near the restoration site. Monitoring the success of the re-vegetation for 5 years should include control measures for exotic and invasive species, if detected.

On page 49, it is not clear what is meant by "*The Corps would expand our restoration acreage to include their acreage (1.7 acres).*" Please clarify.

On page 50, the Corps states it intends to restore all of Area 1S, using a portion for "advance mitigation." The Department regards "advance mitigation" in this context as the functional equivalent of a mitigation bank, and FWS Mitigation Policy (64 FR 49229-49234) does not allow the use of NWR lands for mitigation banks.

V.B. - Preservation, page 54. This section states that the proposed mitigation for the 47-foot alternative is predicated on a "base year" (immediately following construction) impact of 223 acres instead of a project-life average annual impact consistent with Corps policy. The average annual impact is lower than 223 acres due to the effect of sea level rise during the next 50 years that would occur without the project. The Department maintains that sea level rise would have a negligible impact on the Savannah NWR if not for the cumulative impact of previous harbor deepening. Therefore, we support obtaining a waiver from the Corps' policy in this instance to instead implement the agency-coordinated level of mitigation.

V.B. - Preservation, page 57. The following statement is misleading: *"If a higher rate of sea level rise actually occurs, some of the freshwater marshes would convert to more saline species, so they would not be available for impact by harbor deepening."* These marshes are at risk to sea level rise only because of the cumulative effect of previous harbor deepening. Tidal freshwater marshes would not be at risk due to sea level rise at the harbor's original depth. Additionally, the impacts to freshwater marsh from harbor deepening will occur quickly compared to the timeframe for sea level rise.

V.B. - Preservation, pages 57-60. These pages discuss sea level rise and the possibility of over-mitigating if sea level rises faster than projected. The Corps proposes to reassess sea level rise at the end of the project's life in 50 years and assign wetlands mitigation credits to the project in an amount equivalent to the over-mitigation. The Department regards "advance mitigation" in this context as the functional equivalent of a mitigation bank, and FWS Mitigation Policy (64 FR 49229-49234) does not allow the use of NWR lands for mitigation banks. This section, among others in the DEIS, also states that the proposed mitigation for the 47-foot alternative is predicated on a "base year" (immediately following construction) impact of 223 acres instead of a project-life average annual impact consistent with Corps policy. The average annual impact is lower than 223 acres due to the effect of sea level rise during the next 50 years that would occur without the project. The Department maintains that sea level rise would have a negligible impact on the Savannah NWR if not for the cumulative impact of previous harbor deepening. Therefore, we support obtaining a waiver from the Corps' policy in this instance to instead implement the agency-coordinated level of mitigation.

V.C. - Compensation, page 65. This section discusses a fishway at New Savannah Bluff Lock and Dam as the primary mitigation feature for the project's impacts to shortnose sturgeon. Fishway effectiveness varies considerably and is difficult to predict. If effective, this measure would provide shortnose sturgeon upstream passage to the Augusta shoals and other riverine spawning areas. Dam removal would represent a more certain means to provide both upstream and downstream passage for shortnose sturgeon and other species, and would also restore riverine characteristics to this portion of the basin; therefore, the Department would prefer dam removal in lieu of a fishway. The Department requests that the Corps continue to coordinate with the FWS to finalize plans for either fishway design and construction or dam removal.

V.C. - Compensation, page 72-73. This section describes a secondary (supplemental) water supply intake line for the City of Savannah to be constructed if needed. Based on a preliminary review, the Department would prefer intake Site 1, because intake Site 2 is likely to adversely

affect more wetland and wildlife habitat. The Department requests further coordination to evaluate impacts and make recommendations if the supplemental intake site is needed in the future.

VIA. Mitigation Plans - Wetlands, page 81. We believe the statement: *"The plug would be constructed of fill and rock and would extend to EL. 10 (above the Mean High Water line)"* is incorrect. It is our understanding that the plug in Rifle Cut will extend to EL. 10 above mean low water, which is 2 feet above mean high water -- not 10 feet, as indicated.

VIA. Mitigation Plans - Wetlands, page 90 and Section VIII – Timing of Construction, page 113. This section should discuss the timing of acquiring the mitigation lands. The Department recommends beginning no later than the start of construction and completing the acquisitions within 2 years.

VIA. Mitigation Plans - Wetlands, pages 92-93. The Corps proposes to restore the entire site at CDF 1S, using a portion as "advance mitigation" for direct impacts to salt marsh. Claiming credit for restoration to offset as-of-yet unidentified impacts elsewhere in the future is the functional equivalent of a mitigation bank. FWS Mitigation Policy (64 FR 49229-49234) does not allow the use of NWR lands for mitigation banks; therefore, the Department cannot support restoration at this site as advance mitigation.

Successful wetland restoration is dependent on three primary factors: soil, hydrology and vegetation. The proposed dredged material removal should expose the original wetland soil and restore the site to the elevation of adjacent marshes. Construction of a "feeder" creek system toward the interior of the restoration site from Middle River will facilitate tidal exchange; however, if restored elevations do not properly restore tidal flow, invasive vegetation with almost no wildlife value may occupy the site. The desired vegetation outcome is to establish a mixed brackish marsh, similar to adjacent marsh, on the site. Chinese tallow tree and common reed, both highly invasive exotic species, have been identified in the marshes near the restoration site. Monitoring the success of the re-vegetation for 5 years should include control measures for exotic and invasive species, if detected.

The following statement, from page 92, is inconsistent with the text of DEIS Section 5.1.1.2: *"Calculations derived from the SOP indicate that approximately 25.8 acres of restored saltmarsh would be required to mitigate for the 14.08 acres of impact. When combined with the 1.7 acres of previous mitigation, the resulting acreage of the mitigation site would be 25.8 acres."* Adding 1.7 acres of mitigation to 25.8 acres equals 27.5 acres.

VIB. Mitigation Plans – Dissolved Oxygen. Was the *Draft Savannah Harbor TMDL for Dissolved Oxygen* released by the U.S. Environmental Protection Agency in April 2010 evaluated for effects of the mitigation plan? With the changes in the flow dynamics, the Front River will have less flow and the residence times in the Harbor will increase. These changes could have a substantial impact on the waste load allocation. The effects on the allowable waste load to the system by the Project are not only caused by the deepening of the navigation channel but also the mitigation features affecting the flow dynamics of the estuary.

More than two years (2009 and 2010) of flow data have been collected on the Front, Middle, and Little Back Rivers. Six of the seven mitigation features involve alterations to flow paths in the system. Has the two years of measured flow been thoroughly compared with the flow predictions of the model? The *Draft Savannah Harbor TMDL* showed a frequency distribution

for the Little Back River. The model comparisons should include daily tidally filtered flows, flow volumes over specified periods, and flow partitioning between the three rivers under various flow regimes.

V.I.E. Mitigation Plans - Chlorides, page 104. This section describes a secondary (supplemental) water supply intake line for the City of Savannah to be constructed if needed. Based on a preliminary review, the Department would prefer intake Site 1, because intake Site 2 is likely to adversely affect more wetland and wildlife habitat. The Department requests further coordination to evaluate impacts and make recommendations if the supplemental intake site is needed in the future.

VII. Consideration of 2008 USACE/USEPA Mitigation Rule, page 107. The DEIS uses county population projection data to estimate the percent increase in impervious surfaces, but should probably also consider industrial development adjacent to the Savannah River, in part due to harbor expansion. For example, a large industrial warehousing complex is proposed adjacent to the Refuge that would involve paving several thousand acres of forest land. The storm water runoff associated with these surfaces is a key threat to the sustainability of adjacent wetlands, which this section should address in the final EIS.

VIII. Timing of Construction, page 113. The table indicates that the Corps will provide funding to GADNR for the striped bass stocking program in late 2015 or early 2016. To offset project impacts that begin when construction is complete, GADNR must have stocking capacity in place in the first spawning season following construction. The Department recommends that the Corps transfer funding for the striped bass stocking program when dredging is initiated, which should provide enough lead time to develop stocking capacity.

Appendix D. Monitoring and Adaptive Management Program

There are inconsistencies of scope of work, roles, and required funding throughout. Strongly suggest a thorough update of Appendix D to bring this to current status and necessary funding. The GaWSC is ready to assist with this.

The USGS Georgia Water Science Center (GaWSC) led the effort in 2006 to develop the Monitoring Plan for the proposed SHEP. This was created from feedback from a multi-agency team with a broad-based variety of expertise that has been involved with the SHEP planning over the years. Much has changed with the SHEP since this plan was first developed five years ago, and subsequently the monitoring plan needs updating. The GaWSC has installed a considerable amount of additional monitoring locations that were originally outlined in the 2006 monitoring plan since its release, and this needs to be properly documented. Additionally, the GaWSC, in collaboration with the multi-agency team, has over the last two years performed the installation and operation of a chloride monitoring network for the City of Savannah water intakes on Abercorn Creek, and more detail regarding the initial results of this work should also be factored into Appendix D. The GaWSC is ready to assist in updating the monitoring plan to reflect the latest scope, roles, and budgetary needs.

Several new monitoring technologies have become available since the original plan was written in 2006. Real-time groundwater chloride monitoring should be considered as an early-warning system for the aquifers in case of damage to the confining layer. The GaWSC currently is performing similar monitoring in the Brunswick, Georgia area. Several existing USGS groundwater monitoring sites along the Savannah River channel could be upgraded to enable real

time monitoring of chloride concentrations. With the deployment of index-velocity stream gages currently in place, there are also techniques now available to estimate the sediment load flux within the Savannah Harbor and surrounding estuary using a sediment surrogate approach. These techniques were developed by the GaWSC and can be beneficial in providing insight into the environmental impacts caused by transported sediments as well as provide operational benefits to the management of the channel and port. It is anticipated that because a considerable amount of the proposed monitoring is already in place, a significant cost savings could be found to help offset the implementation of these new monitoring technologies to make a more robust monitoring effort for the SHEP.

Finally, with a large share of the monitoring data now being available in real-time, the ability to visualize and alert water resource managers and stakeholders of the real-time conditions in the Savannah River Estuary are presently available. The USGS real-time webpage, NWISWeb, currently displays all data being collected in the SHEP at http://waterdata.usgs.gov/ga/nwis/current/?type=flow&group_key=basin_cd. The USGS has developed a real-time alerting system can be activated to electronically notify individuals when parameter(s) have exceeded a pre-defined threshold (for example, see <http://water.usgs.gov/wateralert/>). A crucial part of any monitoring plan should now include the ability to disseminate the information using visualization and information delivery tools in order to keep stakeholders informed and allow water managers to make informed decisions in a real-time manner.

3. GOALS OF AN ADAPTIVE MANAGEMENT PLAN, page 5-6. It is stated that if a mitigation feature is changed, monitoring will continue for an additional year. This period may be too short depending on the feature that was changed, when the change was made, and the hydrologic condition for the additional year. The ecosystem has a much different response during wet and dry years.

5.B. Pre-construction Monitoring – Major Components, page 7. The Hydrologic Monitoring Plan is five years old and needs to be updated to reflect the current gaging network, advances in monitoring technologies, and changes in gaging costs for installation and annual operation and maintenance. The Hydrologic Monitoring Plan was edited by the U.S. Geological Survey (USGS) S.C. and Ga. Water Science Centers.

The length of the sampling period of “one lunar cycle” is not clear. Is it a 25-hour period, 14-, or 28-day cycle? With what has been learned about the dynamics of the system and data collection, is this the most cost-effective period to collect data for evaluating the ecosystem and the performance of the models?

The section on physical monitoring indicates that the project would fund USGS to collect pre-construction hydrologic data for “up to one year,” but all references to pre-construction monitoring on page 8 are to “one year.” The Department recommends 1 year of pre-construction monitoring.

5.C. Pre-construction Monitoring – Details of the Monitoring, page 8 and Figure 3. There are two existing water quality stations on Back River (021989784 and 021989791), and one on Front River (02198920), that have long-term salinity data. The Department recommends using this long-term salinity data set, from the end of the last harbor deepening construction to the start of any new deepening construction, as baseline salinity conditions for these sites and to supplement the 1 year of pre-construction water quality monitoring.

5.C. Pre-construction Monitoring – Details of the Monitoring, page 8. Pre-construction monitoring for 1 year is intended to create or supplement a pre-project baseline. However, information based on only 1 year of data may not provide an adequate baseline. Using existing longer-term data from water quality stations on Back River and Front River should help address this problem (see previous comment on Appendix D, section 5.C, page 8 and Figure 3). Similarly, wetland and fishery studies performed during project planning represent useful baseline information. This section and others in the final EIS should describe in greater detail developing baseline conditions for the various monitoring parameters. In addition, this section states: *“Monitoring would be conducted between the time a decision is made on implementing a harbor expansion and the time the construction begins which would affect aquatic resources in the inner harbor.”* If construction is delayed for more than 1 year after a decision for harbor expansion, the Department recommends continuing pre-construction monitoring until construction begins.

The proposed water-quality parameters are not described. To be more complete, the full contingent of parameters available for continuous monitoring should be listing, which are: water temperature, specific conductance, pH, dissolved oxygen, and turbidity. Each parameter brings a specific scientific benefit to the monitoring plan, as well as complements each other with diagnostic troubleshooting of equipment failure.

5.C. Pre-construction Monitoring – Details of the Monitoring, page 9, Figure 3. This figure needs to be updated to reflect current (2011) real-time network.

5.C. Pre-construction Monitoring – Details of the Monitoring, Page 10. The USGS Georgia Water Science Center currently performs all of the monitoring in the SHEP

The funding figures are 5-years old and need to be revisited.

5.C. Pre-construction Monitoring – Details of the Monitoring, Page 12. The goals of the Intense Monitoring are not clear. “This sampling would address those constituents that ... cannot be monitored by continuous recorders.” The parameters and constituents listed; river discharge, flow volumes, flow velocity, flow direction, water surface elevation, depth, salinity, dissolved oxygen, water temperature, turbidity, pH, and specific conductance, can be monitored continuously. The remaining constituents are a short list: suspended solids, 5-day biochemical oxygen demand (BOD), and chlorides. Other parameters, constituents, and rates to consider are nutrients, long-term BOD, nitrification rates, sediment oxygen demand rate, re-aeration rates and tidal marsh dissolved-oxygen production/depletion rates.

Based upon the results of the initial chloride monitoring performed by the GaWSC, the Department recommends that SHEP chloride monitoring include a real-time index velocity streamgauge at Bear Creek, and full chloride monitoring stations at Abercorn Creek (near the intakes) and on the Savannah River at I-95. Much of the monitoring infrastructure is already in place at the last two stations. The Bear Creek streamgauge and some of the water-quality instrumentation would need to be reinstalled.

5.C. Pre-construction Monitoring – Details of the Monitoring, Page 14. The Georgia Fish and Wildlife Cooperative Research Unit, not the South Carolina Fish and Wildlife Cooperative Research Unit, have the fisheries personnel available to monitor the movement of fish.

5.E. Summary, Page 15. In the Cost Summary, Oversight and Contracting are listed under "Biological" but not under "Geomorphic." Should there be a similar item under "Geomorphic"?

6.B. MONITORING DURING CONSTRUCTION-Major Components, page 16. "On a regular basis, the Corps would assess how well the ... models predict..." What is the frequency of this assessment? Every 4 months? Were other locations for sampling chlorides concentrations considered, such as the mouth of Abercorn Creek and I-95?

6.C. MONITORING DURING CONSTRUCTION-Details of Monitoring, page 18. Were other locations for sampling chlorides concentrations considered, such as the mouth of Abercorn Creek and I-95?

6.D. MONITORING DURING CONSTRUCTION-Reporting, Page 19. What is the reporting interval between the end of the 4-month data- collection periods and the release of the model evaluation reports?

6.E. MONITORING DURING CONSTRUCTION-Cost Summary, Page 19. In the Cost Summary, Oversight and Contracting are listed under "Biological" but not under "Geomorphic." Should there be a similar item under "Geomorphic"?

7.A. Post-construction Monitoring -Goals, page 20. Are there details for the Transfer Efficiency Study of the dissolved-oxygen system? The data collection for the demonstration project was inadequate to show any conclusive effect of the injection system on the receiving waters.

7.B. Post-construction Monitoring - Major Components, page 21. The Corps commits to biological monitoring when soil cadmium concentration is greater than or equal to 4 ppm, but does not define biological monitoring. The Department understood the Corps had agreed to tissue cadmium sampling independent of soil cadmium sampling. Tissue sampling should occur: 1) prior to sediment placement to collect baseline data; 2) during sediment placement; and 3) post placement until 3 consecutive years of samples contain cadmium concentrations that are less than the potential adverse effect level, which is to be determined.

The Department accepts the Corps' use of 4 ppm cadmium concentration in capping material as a trigger for remedial action in DMCA's. The Department understands that the Corps will move a DMCA to higher priority in the rotation for O&M sediment placement and vegetation monitoring if 25 cumulative acres are found to have a cadmium concentration greater than or equal to 4 ppm. Sampling and placement will continue until the DMCA has less than 25 cumulative acres with a cadmium concentration greater than or equal to 4 ppm.

This section states that the Corps will sample the top 15 cm of the cap material. The Department recommends sampling the top 30 cm of the cap material. This section also states that the Corps will conduct biological monitoring when soil cadmium concentrations exceed 4 ppm if the area "cannot be covered by O&M sediments within 6 months." This approach would risk a failure to conduct biological monitoring in an area that the Corps intends to cover within 6 months, but for whatever reason, may not. The Department recommends biological monitoring when concentrations exceed 4 ppm without regard to when the Corps intends to cover the area with O&M sediments.

The Department requests that the Corps continue to coordinate with the FWS prior to completion of the final EIS to finalize plans for biological monitoring within DMCAs, including tissue sampling.

7.B. Post-construction Monitoring – Major Components, page 22. No monitoring is proposed for striped bass, but should be. We recommend a post-project assessment of striped bass habitat using the water quality monitoring data and updated water quality simulations. Model updates are already planned that would facilitate a low-cost assessment using the established striped bass habitat criteria. The Department recommends comparing conditions during the fourth year of post-project monitoring with pre-construction predicted habitat impacts, and formulating corrective actions as necessary based on the results.

7.B. Post-construction Monitoring – Major Components, page 23. The Department supports the sampling protocol (species and timing) described in this section, with one exception (or clarification). Sampling when the CDFs are wet is proposed for April and September. However, the next sentence says three individuals of two species (six total) “will be collected **each year**” (emphasis added). We recommend revising this to state that these six individuals will be collected twice a year (April and September) when the CDFs are wet.

7.C. Post-construction Monitoring – Details of the Monitoring, page 24. The DEIS shows various post construction monitoring ranging from 2 to 5 years. It is not unlikely that a drought or high-flow period lasting several years would occur during the post-construction monitoring period, which would complicate comparisons with pre-construction monitoring data. In addition, tidal freshwater wetlands respond slowly to salinity change. Therefore, the Department recommends increasing wetland and continuous water quality monitoring from 5 years post-construction to 10 years.

8.B Performance Measures – Post-construction Monitoring, page 28. We recommend developing a detailed data analysis plan for the post-construction water quality monitoring. The mitigation features will significantly alter the system, which will complicate the comparisons of pre- and post-construction conditions to determine the efficacy of the mitigation measures. A recent example of the need for such a plan was the re-oxygenation demonstration performed for the Savannah Harbor Expansion project. Monitoring data was collected, but the analysis of that data failed to conclusively quantify the effect of the demonstration project in the highly variable DO dynamics of the system.

8.B Performance Measures – Post-construction Monitoring, page 29. Concerning the revegetation of Area 1S, grading the site and its feeder creeks to the proper elevations is essential to avoid establishing invasive vegetation (e.g., Chinese tallow tree) that have little or no wildlife value. The discussion and table in this section should specify criteria for successful establishment of native wetland plants. Monitoring the success of the re-vegetation for 5 years should include control measures for exotic and invasive species, if detected.

9.B. Adaptive Management-Decision Making Process, Decision Process, page 30. This section describes an informal inter-agency review process for monitoring data and reports during the 5-year post-construction monitoring period. Within 1 year after the 5-year post-construction monitoring period, the Corps would prepare a consolidated report of the various monitoring programs, followed by 30 days of agency review, an unspecified time period for further report revision, public review, and a potential elevation process. This time-line for making decisions on adaptive management actions would likely require a minimum of 1.5 years after the 5-year

post-construction monitoring period, and could take much longer. The Department recommends compressing this process so that final decisions on corrective actions are reached within 1 year after the monitoring period. In addition, because we have recommended extending the duration of post-construction monitoring from 5 years to 10 years, we also recommend preparing and reviewing a consolidated report of the various monitoring programs at the end of 5 years, and again at the end of 10 years following project construction, to ensure that adaptive management decisions can be made when it becomes apparent that a problem exists, and in a timely manner.

9.B. Adaptive Management- Decision Making Process, pages 30-31. Appendix D contains two sections "9.B" – the second one should be "9.C."

9.B. Adaptive Management-Decision Making Process, Decision Criteria, page 31-32. The Federal modeling performance goals in the plan are those provided by review agencies in 2001 during hydrodynamic model development. Because the agencies were aware of the complexity of the system and model limitations, we allowed considerable latitude in the performance of the models. We are concerned that adopting the same tolerances for the performance of the constructed project is inappropriate, because actual impacts could differ substantially from the predicted impacts without triggering remedial action. Based on earlier coordination, the Corps modified the tolerances for achieving a goal of < 1 ppt salinity to ± 0.1 ppt, and we support this change. The goal for salinity in the range of 1-5 ppt has not been modified, and would allow considerable impact without triggering action. As proposed, a range of 0.5 to 1.5 ppt is acceptable for a salinity goal of 1 ppt ($\pm 50\%$), while a range of 0.89 to 1.09 ppt is acceptable for a salinity goal of 0.99 ppt ($\pm 10\%$). We recommend modifying the goal for salinity in the range 1-5 ppt to $\pm 10\%$ (not ± 0.5 ppt as currently stated) to make it more consistent with other goals and triggers for adaptive management.

10. Adaptive Management – Implementing Warranted Modifications, pages 32-33. This section states that the "Corps would seek and obtain its funds for this phase each year through the normal budget process," which concerns the Department. It is relatively certain that impacts to trust resources of the Department will occur following construction, but the effectiveness of the mitigation features is much less certain. Therefore, the Department cannot agree that the proposed mitigation plan adequately addresses project impacts unless contingency funding for monitoring/adaptive management activities is assured.

This section should also discuss an implementation schedule for needed corrective actions. The Department recommends initiating construction, or other appropriate remedial actions, within 1 year of a decision to modify a mitigation feature.

10.C. Adaptive Management – Monitoring after Implementing an Adaptive Management Feature, page 35. The Corps proposes to monitor the performance of corrective actions under the adaptive management program. It is unlikely that 1 year of post-construction monitoring is sufficient to determine the outcome of the action in a system as dynamic as the Savannah estuary. The Department recommends 3 years of post-construction monitoring of adaptive management actions.

11.B. Long Term Monitoring – Major Components, page 36. The Corps proposes to fund four water monitoring stations to determine whether the mitigation features are functioning as intended. A fifth station, Station 021989784, is located at the intake of the freshwater supply system for the 3,000 acres of managed wetlands on Savannah NWR and is therefore especially

important for monitoring project impacts to the Refuge. The Department recommends adding it to the Corps' list of supported stations.

Appendix L, Cumulative Impact Analysis

8.B. Wetlands, Page 16. This appendix does not include a section header to separate Section B, Tidal Freshwater Marsh, from Section A, Savannah NWR Freshwater Waterfowl Management Operations. We believe page 16 is the appropriate location for this.

8.B. Wetlands – Historic Basis, page 21. Figure 5 and the associated text do not provide an accurate representation of marshes in 1854. Most of the salt marsh shown on Figure 5 is in the Wright River system, not the Savannah system. The demarcation between freshwater marsh, brackish marsh, and salt marsh is not supported by historical information. As stated on page 20, Appendix L, tidal forest in the mid-1700's extended to the junction of Back River and the Savannah River, and brackish marshes extended to near the mouth of the river. Appendix Q, page 22, mentions that Hutchinson Island was used extensively for rice culture, which requires freshwater. Between the mid-1700's and mid-1800's, only minor modifications were made to the Savannah River. This information indicates that the depiction of marsh type extent in Figure 5 and the resulting areal estimates are mistaken, and that the freshwater limit extended to about river mile 7 in the mid-1850's. Figure 5 shows the interface at about river mile 19. The Department recommends correcting these errors.

Section 8.B. Wetlands – Present Condition, Tidal Freshwater Marshes, page 25. Figure 6 and the associated text do not provide an accurate representation of marshes in 1999. USGS estimates based on detailed field studies and Corps estimates based on the hydrodynamic model are generally consistent, but are substantially different from the estimates shown in Figure 6. The Department recommends corrections for clarity.

8.B. Wetlands – Present Actions/Stresses and Future Actions/Stresses, pages 27-28. This section states that the primary stress to tidal freshwater marsh is prolonged drought, which is not supported by evidence. In 1875, when the controlling depth of the navigation channel was 12-15 feet, the Savannah estuary supported an estimated 12,000 acres of tidal freshwater marsh. In 2005, when the controlling depth was 42 feet, the estuary supported only 3,269 or 4,072 acres (depending on study method used). This section should instead state that the inland intrusion of salt water resulting from channel deepening is a constant stress on tidal freshwater marsh, and that prolonged drought exacerbates this stress.

This section also states that the Corps evaluated the effects of sea level rise on tidal freshwater marsh. The Department maintains that sea level rise would have a negligible impact within the Savannah NWR if not for the cumulative impact of previous harbor deepening.

8.B. Wetlands – Alternatives to Mitigate for Cumulative Effects – Tidal Freshwater Marshes, page 32. The acres listed for preservation for the 48-foot project (2,094) are not consistent with the acres listed elsewhere in the document (2,683). The Department recommends corrections for clarity.

8.C. Wetlands – Saltmarsh and Brackish Marsh, page 32. The discussion of the mitigation for the loss of non-freshwater tidal marshes is confusing. Previous sections – Appendix C, Section V, and elsewhere – speak of impacts to 14.08 acres of salt and brackish marsh with 42 (or 45) acres listed as mitigation for the 44-foot alternative. Appendix C lists 15.68 acres of

brackish marsh loss for all the proposed harbor deepening alternatives. This Appendix lists the loss of 3.0 acres of brackish marsh and 12.68 acres of saltmarsh, which equals the 15.68 acres of brackish marsh mentioned in Appendix C. This is confusing because both 14.08 acres and 15.68 acres are listed as marsh loss for either the 44-foot alternative or all alternatives. Also, the acreage proposed for restoration is not clear. The Department recommends revisions for clarity.

8.C. Wetlands – Saltmarsh and Brackish Marsh, page 33. Most of the salt marsh in the estimate provided in the "Present Condition" section is in the Wright River system, and not in the Savannah River system. The Department recommends corrections for clarity.

Appendix M - Sediment Quality Evaluation

7.3. Monitoring and Contingency Plan, pages 83-86. The Department recommends taking samples of the cap material to a depth of 30 cm instead of the 15 cm depth proposed. This section also cites 7 ppm cadmium concentration as the trigger for remedial action: we recommend this section be revised to be consistent with Appendix D (Section 7.B) which identifies 4 ppm as the trigger.

We recommend biological monitoring when cadmium exceeds 4 ppm regardless whether the Corps plans to cover the area with O&M sediments within 6 months. This section, and others, should define biological monitoring in the context of cadmium in disposal areas. The Department recommends a program of monitoring wildlife activity in disposal areas and cadmium levels in bird tissues that is independent of the Dredge Material Containment Area (DMCA) capping criteria. Wildlife monitoring should begin with sediment placement and continue as long as all other monitoring of the DMCA. Tissue monitoring should occur: 1) prior to sediment placement to collect baseline data; 2) during sediment placement; and 3) post placement until 3 consecutive years of samples contain cadmium concentrations that are less than the potential adverse effect level, which is to be determined. The Department supports the sampling protocol (species and timing) described in Appendix D, page 23, and requests that the Corps continue to coordinate with the FWS prior to completion of the final EIS to finalize plans for biological monitoring within DMCA's, including tissue sampling.

Our recommendations necessitate revisions to the "Decision Matrix for Cadmium Sampling" on page 86, including: remove references to 7 ppm cadmium concentrations; remove "if necessary" in reference to tissue sampling; do not differentiate between areas slated for covering before or after 6 months; and continue wildlife use studies until tissue monitoring is completed.

Appendix Q, Risk and Uncertainty Analysis in Environmental Evaluation and Approach

4.A. Uncertainty in Wetland Impact Predictions, page 7. Based on an analysis prepared by Kinetic Analysis Corporation (KAC), this section concludes that the hydrodynamic model probably over-predicts salinity and under-predicts dissolved oxygen, i.e., the model errs towards the side of simulating conditions worse than would actually occur. We believe this analysis may seriously misrepresent the risk and uncertainty associated with the water quality predictions. With the exception of the new channel depth, the KAC analysis relied upon the existing geometry of the Savannah River estuary. Several mitigation measures would significantly modify the system geometry, including significant flow diversion at McCoys Cut, closing Rifle Cut, filling the Back River sediment basin, and removing the tide gate. Flow routing and flow volume in the three main river channels would become significantly different from the current system. Therefore, we believe the degree of risk and uncertainty regarding expected water

quality impacts, and the resulting wetland impacts, is considerably higher than the KAC analysis suggests, which is one of the reasons why the Department recommends extending the proposed post-construction monitoring from 5 years to 10 years.

4.B. Uncertainty in the Amount of Sea Level Rise, page 8. This portion of the DEIS discusses risk and uncertainty in relation to sea level rise and the modeling of impacts to freshwater marsh. This section argues for predating mitigation on the “base year” impacts (the year construction is complete) instead of average annual impacts over the life of the project (consistent with Corps policy), because “impacts that would occur soon after the base year are those most likely to occur and least subject to uncertainty from more distant projections of future conditions.” Average annual impacts are less than base year impacts because sea level rise over 50 years will cause wetland losses without the project. The Department agrees with predating mitigation on the base year impacts, but for a different reason. The Department maintains that sea level rise would have a negligible impact on Savannah NWR if not for the cumulative impact of previous harbor deepening.

4.C. Risk with Wetland Impact Predictions, page 8. Wetland impacts are inferred from salinity changes predicted by the hydrodynamic model. This section states: “...the hydrodynamic model has roughly an 80 percent chance of over-predicting salinity levels at low salinity levels, thus leading to an over-prediction of salinity-induced impacts to wetlands. Therefore, the model is considered to present little risk for decision-makers evaluating salinity impacts to wetlands.” The Department disagrees with this characterization, which was based on analysis by KAC that, with the exception of the new channel depth, relied upon the existing geometry of the Savannah River estuary. Several mitigation measures would significantly modify the system geometry, including significant flow diversion at McCoys Cut, closing Rifle Cut, filling the Back River sediment basin, and removing the tide gate. Flow routing and flow volume in the three main river channels would become significantly different from the current system. Therefore, we believe the degree of risk and uncertainty regarding expected water quality impacts is considerably higher than the KAC analysis suggests, and is a reason we recommend extending the proposed post-construction monitoring from 5 years to 10 years.

5.B. Risk with Dissolved Oxygen Predictions, page 10. This section states that the model slightly under-predicts DO levels and is therefore a good predictor of DO-related impacts. Because the project and the various mitigation features will substantially alter channel geometry of the lower river, and the hydrodynamic models are based on the current geometry, the Department attributes a relatively high degree of uncertainty with the model predictions of water quality impacts, including DO impacts. We recommend that the final EIS recognize and acknowledge this uncertainty. The risk to fish and other resources of underestimating DO impacts is further justification for expanding the monitoring effort beyond the currently proposed 5 years to 10 years.

9.00 REFERENCES

The Draft EIS references a USGS report, by the Cooperative Research Unit, titled “Simulation of Water Levels and Salinity in the Rivers and Tidal Marshes in the Vicinity of the Savannah National Wildlife Refuge, Coastal South Carolina and Georgia” but does not provide the reference. Suggest the Final EIS include the reference (Conrads et al, 2006) as follows:

Conrads PA, Roehl EA, Daamen RC, and Kitchens WM. 2006. Simulation of Water Levels and Salinity in the Rivers and Tidal Marshes in the Vicinity of the Savannah National Wildlife Refuge, Coastal South Carolina and Georgia. US Geological Survey, Scientific Investigations Report 2006-5187, 134 p. Available online at: <http://pubs.usgs.gov/sir/2006/5187/pdf/sir20065187.pdf>

Draft General Re-Evaluation Report

Page 236, sections 12.3.1 and 12.3.2. Based on an analysis prepared by Kinetic Analysis Corporation (KAC), this section concludes that the hydrodynamic model probably over-predicts salinity and under-predicts dissolved oxygen, i.e., the model errs towards the side of simulating conditions worse than would actually occur. We believe this analysis may seriously misrepresent the risk and uncertainty associated with the water quality predictions. With the exception of the new channel depth, the KAC analysis relied upon the existing geometry of the Savannah River estuary. Several mitigation measures would significantly modify the system geometry, including significant flow diversion at McCoys Cut, closing Rille Cut, filling the Back River sediment basin, and removing the tide gate. Flow routing and flow volume in the three main river channels would become significantly different from the current system. Therefore, we believe the degree of risk and uncertainty regarding expected water quality impacts is considerably higher than the KAC analysis suggests, and is a reason we recommend extending the proposed post-construction monitoring from 5 years to 10 years.

Pages 236-237, sections 12.3.3 and 12.3.4. This section states that the model slightly under-predicts DO levels and is therefore a good predictor of DO-related impacts. Because the project and the various mitigation features will substantially alter channel geometry of the lower river, and the hydrodynamic models are based on the current geometry, the Department attributes a relatively high degree of uncertainty with the model predictions of water quality impacts, including DO impacts. We recommend that the final EIS recognize and acknowledge this uncertainty. The risk to fish and other resources of underestimating DO impacts is further justification for expanding the monitoring effort beyond the currently proposed 5 years to 10 years.

The Department appreciates the opportunity to comment on this project. Let me know if you have questions about our comments. I can be reached on (404) 331-4524 or emailed at gregory.hogue@ios.doi.gov.

Sincerely,



Gregory Hogue
Regional Environmental Officer

cc;

Southeast Regional Administrator, Environmental Protection Agency

Southeast Regional Director, NOAA Fisheries Service

Southeast Regional Director, U.S. Fish and Wildlife Service

Field Supervisor, FWS, Athens, GA

Refuge Manager, Savannah NWR

Georgia Water Science Center, USGS

South Carolina Water Science Center, USGS

Senior Advisor for Science Applications, USGS

Department of the Interior, Office of the Secretary, Office of Environmental Policy and Compliance

Page 2

637-BB-141-EV01, 637-BB-141-EV02

Comment: *"The Department's preferred plan for deepening Savannah Harbor is the 45-foot depth alternative, because it minimizes the loss of freshwater tidal wetlands, impacts to Savannah National Wildlife Refuge (NWR), and risk and uncertainty of impacts to trust fish and wildlife resources. Previous channel deepening projects have reduced tidal freshwater marsh within the Savannah River estuary from about 12,000 acres to about 3,300 acres. The majority of the remaining freshwater tidal wetlands occur on Savannah NWR. Further deepening the channel from its present depth of 42 feet would further reduce this important and increasingly rare national resource. At the NED plan depth (47 feet), a net loss of 223 acres of tidal freshwater wetlands is predicted after flow-diversion mitigation is implemented. At the LPP depth (48 feet), a net loss of 337 acres of tidal freshwater wetlands is predicted after flow-diversion mitigation is implemented. The loss of an additional 114 acres of freshwater tidal wetlands associated with the LPP would represent a 50 percent increase in impacts to the Savannah NWR over the NED plan and a cumulative loss of approximately 10 percent of the basin's remaining freshwater tidal wetlands. For this reason, the Department does not support the LPP."*

Response: The District recognizes the Department of Interior's preference for the 45-foot depth alternative because it would result in the least adverse environmental impacts. The Corps believes the Federal agencies should make their decisions after considering all factors that the proposed action could affect, including economic ones.

The loss/conversion/change in areal distribution of wetland community types within the Savannah Harbor estuary are the result of many factors. As discussed in the EIS, conversion of bottomland hardwoods to rice fields, shoreline/upslope development, sea level rise, etc. have contributed to changes in the amount of tidal freshwater marsh in the Savannah Harbor estuary.

637-BB-141-EV03, 637-BB-141-EV04, 637-BB-141-EV05, 637-BB-141-EV06, 637-BB-141-EV07

Comment: *"The potential effect of sea level rise on wetland habitats is mentioned throughout the DEIS. The document discusses drought, sea level rise, and channel deepening, but does not analyze the interaction between these major influences. In Appendix C (Mitigation Planning) and elsewhere in the DEIS, the Corps suggests that if the rate of sea level rise exceeds the historic rate, the proposed compensatory mitigation (e.g., land additions to the Savannah NWR for the loss of 223 acres of freshwater tidal wetlands under the NED plan) would overcompensate project impacts, because some of those acres would have converted to brackish or salt marsh without the project. The Corps proposes to reassess sea level rise effects in the future and assign "advance mitigation" credits to the project for use with future actions. The Department objects to this proposal, because sea level rise would have a negligible impact in the upper estuary if not for the cumulative impacts of previous harbor deepening."*

The rate of sea level rise is uncertain and substantial impacts resulting from sea level rise are likely well into the future. Conversely, the impacts of further harbor deepening will begin almost immediately. In addition, due to the complexity of the system and limitations of the models, the Department has concerns that the models may underestimate wetland impacts. The Department regards "advance mitigation" in this context as the functional equivalent of a mitigation bank, and U.S. Fish and Wildlife Service (FWS) Mitigation Policy (64 FR 49229-49234) does not allow the use of NWR lands for mitigation banks to compensate for the effects of activities authorized by the Department of the Army under Section 10 of the Clean Water Act and Section 10 of the Rivers and Harbors Act. Therefore, the Department does not support the concept of advance mitigation based on a future evaluation of the relative impacts of sea level rise. We do support, however, obtaining a waiver in this instance from the Corps' policy to implement the agency-coordinated level of mitigation for the base year (the year construction is completed) impacts, rather than mitigating for the project's average annual impacts or reassessing sea level rise impacts in the future."

Response: The DEIS provided sufficient analysis of the impacts of drought, sea level rise, and channel deepening on wetlands in the Savannah Harbor estuary to provide the reader with an understanding of the effects of these phenomena. The District carried out all wetland studies and analyses identified by the Wetland Interagency Coordination Team as being required to evaluate the wetland impacts accruing to various project alternatives.

The analysis of sea level rise and its effects on tidal freshwater marsh in the estuary is a requirement of EC 1165-2-211. Additionally, ER 1105-2-100 states "Ecosystem outputs are not discounted, but should be computed on an average annual basis, taking into consideration that the outputs achieved are likely to vary over time". Based on these two requirements, Savannah District determined that the wetland mitigation (purchase of 2,245 acres of land for preservation) for the 47-foot depth channel would over compensate for project impacts in the event sea level rise exceeded historic rates. Nonetheless, the District requested a waiver of the requirements of 1105-2-100 and approval is expected. Mitigation would then be based on the impacts that would occur at the time of construction. Hence, a portion of the original proposal has been removed – a comparison of impacts after the 50-year life of the project resulting from construction versus those caused by sea level rise. This comparison would have determined how accurately the noted 2,245 acre preservation compensated for project actions and formed the basis for advance mitigation credits.

The Wetland Interagency Coordination Team participated in the development of the procedures which were used to estimate the impacts of the various harbor deepening alternatives on wetlands. Because estuarine systems are so complex, numerical modeling will not be able to capture all of their interactions with absolute accuracy. Nonetheless, the District is confident that these analyses reasonably forecast eventual impacts to wetland community types. The selected alternative includes a post-construction monitoring plan which will empirically evaluate actual wetland impacts, as well as an adaptive management component which will adjust any of the mitigation features, as necessary. The basis of wetlands preserved [currently 2,265 acres in extent] as mitigation for the adverse impacts of the 47-foot channel deepening has a relationship to the sea level in the project area. USACE has

removed from its proposed action the evaluation of the effects of sea level changes on various wetland community types at the end of the project's 50-year life and use of any over-mitigation as credits toward future wetland losses from project O&M activities.

Concur. The Savannah District has requested a waiver from Section 5, paragraph E-36.c.(1) of ER 1105-2-100 regarding use of the average annual basis to compute the amount of environmental impacts. This waiver is based on the belief that the project should mitigate for the environmental impacts that would occur when the project is implemented and the fact that project impacts are more easily ascertained in the early life of the project, rather than 50-years later.

637-BB-141-EV08, 637-BB-141-EV09, 637-BB-141-EV10, 637-BB-141-EV11

Comment: *"Assuring the effectiveness of the mitigation features proposed in the DEIS is essential to the Department's approval of the selected project plan. These features were developed using pre-construction data and models to predict potential effects to the estuary. The DEIS states that natural variation alone will nearly guarantee that conditions during the first few years after construction are different from those under which the models were first calibrated. Currently, the Monitoring and Adaptive Management Plan proposes 5 years post-construction monitoring of key mitigation features, which we believe is not long enough. It is the Department's position that 10 years post-construction monitoring is necessary for the adaptive management process to work; i.e., to ensure that impacts to natural resources in this complex system resulting from project construction are limited to those predicted. Further, the Department recommends a more precise definition of observed conditions that would prompt changes to the mitigation features, and a time-line for making decisions and taking corrective actions thereafter. The Department is also concerned that funding for adaptive management will depend upon the Corps' annual appropriations process. It is relatively certain that impacts to trust resources of the Department will occur following construction, but the effectiveness of the mitigation features is much less certain. Therefore, the Department cannot agree that the proposed mitigation adequately addresses project impacts unless contingency funding for monitoring and adaptive management is assured."*

Response: **Concur.** The SHEP's monitoring and adaptive management plan is specifically designed to evaluate the effectiveness of its constituent mitigation features. It is important to note that the plan includes funding to modify/supplement any mitigation feature the monitoring deems necessary.

A review of the monitoring protocol does not reveal a requirement for ten years of post-project monitoring. Five years of post-project monitoring should provide ample data regarding the project's impacts on physical parameters [dissolved oxygen, salinity, etc.] affecting water quality and other concerns, such as fish distribution, etc. However, the monitoring plan will be extended two additional years [to seven] to document the recovery of the CDF 1S marsh restoration site. This time extension would comport with monitoring requirements that the Regulatory Branch of USACE requires of permittees for similar activities.

The Monitoring and Adaptive Management Plan [pages 28-32] provides a discussion of post-construction monitoring and the decision-making process that would determine if additional monitoring and/or mitigation measures are warranted. The plan did not identify specific acceptability criteria for water quality or biologic parameters [page 28] that would trigger the need to implement additional monitoring or modify mitigation measures. This was by design, i.e., there was a concern that a specific threshold for a parameter would limit the judgment of subject matter experts about when/what kind of changes might be needed when the monitoring data becomes available. Namely, the monitoring data might prompt a resource expert to recommend modifying a monitoring protocol and/or changing a particular mitigation measure, even though a specific threshold had not been reached. Further, the potential cumulative impacts of several parameters could become a concern even though the threshold limits had not been exceeded for any one parameter.

Decision points relative to changes in the monitoring plan or mitigation features can be reached at any time during the post-construction monitoring effort. As soon as they are finalized, monitoring data and reports would be made available to the resource agencies in support of this goal. The plan currently provides for a meeting each year between the District and the resource agencies to discuss the data collection and any protocol changes. However, such a meeting could be conducted at any time circumstance/concerns dictate. If the monitoring identifies impacts that are well outside of those predicted, consultation with the resource agencies would begin immediately. Corrective actions could range from a change in the monitoring plan to a cessation of construction activities until a given problem is rectified.

The District would obtain funds for project construction (including monitoring and adaptive management) through its established budget process. The Corps considers monitoring and adaptive management to be mitigation features, so they would be treated as "general navigation features" and budgeted along with funds for the channel deepening. The Corps would consider the project to still be in "Construction" until the end of the monitoring and adaptive management period. After that time, the Corps would budget for operation and maintenance of the channel and its mitigation features through the Operations and Maintenance funding program. The Corps expects the Record of Decision to state that approval of the project is conditioned on performance of the monitoring and adaptive management aspects of the project. That procedure is a method identified by CEQ in their 14 January 2011 guidance titled "Appropriate Use of Mitigation Monitoring and Clarifying the Appropriate Use of Mitigated Findings of No Significant Impact" as being sufficient for a Federal agency to ensure that the monitoring and adaptive management would be performed.

Page 3

637-BB-141-EV12, 637-BB-141-EV13

Comment: *"The Department is concerned about the reliance on the hydrodynamic and water-quality models in the Adaptive Management Plan (AMP, Appendix D). The Plan does not include ecological performance measures to independently evaluate the effectiveness of the mitigation for the deepening of the Savannah Harbor. The models were developed to evaluate potential resource impact from*

deepening and to evaluate various mitigation actions to minimize environmental degradation of valued resources. The mitigation plan results in major changes to flow dynamics of the Lower Savannah River Estuary. Six of the seven mitigation features involve alterations to flow paths. The expected result of the mitigation is that the post-construction ecosystem will function in a similar manner to the pre-construction ecosystem. The monitoring data, along with ecological performance measures, should be used to evaluate the effectiveness of the mitigation features."

Response: The Monitoring and Adaptive Management Plan [pages 30-32 of the Plan] notes that field data collected during the post-construction monitoring and the hydrodynamic and water quality models are the main tools which will be used to determine how the project is performing and if the impacts are generally as expected. Further, page 31 of the Plan details that the District, Cooperating Agencies, and the state Natural Resource Agencies will review this data to determine whether impacts are generally as anticipated or whether changes to a specific project element, per se, and/or the mitigation plan are warranted. Even though the potential impacts of the project were evaluated under a range of likely conditions, the actual circumstances experienced after construction will be somewhat different from those used for evaluation in the project's feasibility phase. Consequently, the hydrodynamic and water quality models will be used to examine post-project performance under actual conditions, e.g., high/low flows, drought, or some combination of these. The performance [accuracy] of the hydrodynamic and water models will be assessed once during pre-construction monitoring and twice during post-construction monitoring and recalibrated, as necessary. This repetition in modeling assessment/recalibration will improve their predictive accuracy by decreasing their range of uncertainty. The District and the natural resource agencies would use the modeling data [after the post-construction assessment/calibration] and compare it to actual field results to evaluate whether the system is performing as expected.

The Monitoring and Adaptive Management Plan [page 30-31] provides a detailed discussion of how the above agencies will conduct the decision-making process, along with the concurrence process for modifying any project element or an agreed upon mitigation measures.

Concur. Please refer to the previous response concerning use of the monitoring data in the decision making process.

637-BB-141-EV14

Comment: *"The AMP does not include ecosystem performance measures for the majority of the resources that the mitigation is trying to protect. The only ecological performance measure found was for the re-vegetation of Area 1S. For the other resources, the Corps proposes to use a modified version of the draft Federal Expectation for Hydrodynamic and Water-Quality Model Calibration and Confirmation performance measures. The intent is to collect additional data, simulate pre- and post-project scenarios with the models, evaluate the calibration of the models, re-calibrate the models (if necessary), and then evaluate the effectiveness of the mitigation."*

Response: A previous response addressed establishment of guidelines rather than specific environmental/biological performance measures. That notwithstanding, the overall goals are known for important indicator species such as Shortnose sturgeon, for which we do not want to cause drastic shifts in their distribution in the estuary. Based on previous field work and recent model predictions, the areal extent of this habitat in the project area has been determined along with how much of that habitat may be affected by the various deepening alternatives. The adaptive management plan [Plan] provides for a year of pre-construction monitoring which would provide almost real-time data regarding this habitat, as well as a distribution study of Shortnose sturgeon within the entire study area. The Plan includes a five-year post-construction monitoring component for these two study elements, as well as using the hydrodynamic and water quality models to evaluate project performance. Throughout and at the end of post-construction monitoring, resource agencies and the District will interpret all the collected data and reach conclusions regarding the project's overall impact the estuary and any additional measures that may need to be taken to protect the health of a particular element therein.

637-BB-141-EV15

Comment: *"It is not clear in the AMP how the draft Federal Expectation for Hydrodynamic and Water-Quality Model Calibration and Confirmation performance measures equates to ecological performance measures. The hydrodynamic and water-quality models currently do not meet these model calibration goals in many areas of the system (see Tetra Tech, 2006; Appendices B-K, P, and Q). If the current models do not meet the calibration performance goals, how will evaluating the model calibration performance for the post-project inform resource decision makers if the ecosystem is being protected by the mitigation features?"*

Response: The natural resource agencies recognized that modeling could not replicate environmental conditions in the estuary with complete accuracy. Therefore, they established performance goals for the models which had to be generally met by their developers. Before the Corps used those tools to evaluate potential project impacts, the natural resource agencies agreed that the models acceptably met the performance criteria and were acceptable for impact evaluation purposes for this project. The Corps has scheduled three intense hydrodynamic data collection efforts if the project moves to implementation. Those efforts are designed to provide data that would allow the modelers to make the models more accurate, thereby reducing the uncertainties around the calculated values. The Corps expects that those opportunities for recalibration would result in the models exceeding the agencies' original performance expectations. The refined models would allow more accurate comparisons between the observed post-construction data and the values calculated for those conditions.

637-BB-141-EV16, 637-BB-141-EV17

Comment: *"It is important to perform a post audit of the models to better assess their predictive capacity and uncertainties. Model calibration goals are not the same as ecological performance measures. By relying solely on the post audit of the models for the evaluation of the mitigation, an opportunity for utilizing the tremendous amount of data and analysis that were used to develop the DEIS is not being realized. The development of the DEIS involved tremendous amounts of data collection and analysis of various resources that needed protection. These data and analyses should be used in*

developing ecosystem performance measures. The ecosystem performance measure could be expressed as the magnitude, duration and frequency of the parameter of interest and appropriate thresholds for actions by resource agencies."

Response: Concur. Field data collected in the estuary would be used to update/refine models to narrow the range between predicted and observed values.

Concur. As noted previously, the refinement of the models would not be the primary tool used to determine project impacts or the degree/kind of modifications which would be made to the mitigation plan. Instead, those refined models would allow more accurate comparisons between the observed post-construction data and the values calculated for those conditions. It is the comparison between observed post-construction field data and the values calculated for those conditions that would serve as the primary tool to determine project impacts and whether modifications to the mitigation plan are warranted.

Page 4

637-BB-141-EV18

Comment: *"There are references in the Plan of the using the monitoring data to show if "...impacts are occurring beyond the range of those expected" and the monitoring data "...will be useful in identifying whether any impacts are occurring beyond the range of those expected" (p. 27). The expected range of impacts was never defined in the AMP. At every sampling and gaging location for a resource of concern, an ecological performance measure should be developed to define the expected ecosystem response to the deepening mitigation."*

Response: Please see previous response on the establishment of performance measures. The range of values expected a given site would depend on the environmental conditions experienced at that time – river flow, temperature, tides, etc.

637-BB-141-EV19

Comment: *"Many of the funding figures appear to be inconsistent between sections of the AMP and between the AMP and the GRR. For example, chloride sampling is listed at \$100,000 on page 18 and \$80,000 on page 24, marsh data collection is listed at \$18,000 on page 17 and \$20,000 on page 24, and long-term monitoring is listed at \$347,000 on page 37 and \$428,400 in the GRR."*

Response: The chloride sampling costs [pages 18 and 24] differ from those for marsh collection data [pages 17 and 24] because they represent a different time frame, i.e., the expenditures on pages 17 and 18 are for monitoring during construction while the values on Page 24 are for post-project monitoring. The costs for long-term monitoring in the GRR have been corrected to reflect what is included in the Adaptive Management Plan.

637-BB-141-EV20, 637-BB-141-EV21

Comment: "Procedures for disposing of sediments that contain cadmium concentrations exceeding 14 parts per million (ppm) are discussed in three parts of the DEIS: 1) Section 5.4.2.2; 2) Appendix D - Monitoring and Adaptive Management; and 3) Appendix M - Sediment Quality Evaluation. These discussions are unclear and inconsistent. In particular, we recommend clarifying the proposed cadmium monitoring program. The Department recommends a program of monitoring wildlife activity in disposal areas and cadmium levels in bird tissues that is independent of the Dredge Material Containment Area (DMCA) capping criteria. Wildlife monitoring should begin with sediment placement and continue as long as all other monitoring of the DMCA. Tissue monitoring should occur: 1) prior to sediment placement to collect baseline data; 2) during sediment placement; and 3) post placement until 3 consecutive years of samples contain cadmium concentrations that are less than the potential adverse effect level, which is to be determined. The Department supports the sampling protocol (species and timing) described in Appendix D, page 23; and requests that the Corps continue to coordinate with the FWS prior to completion of the final EIS to finalize plans for biological monitoring within DMCA's, including tissue sampling."

Response: The District has agreed to conduct bird tissue analysis as part of the monitoring efforts associated with the disposal of sediments having elevated cadmium levels. Wildlife use monitoring and bird tissue analysis would be conducted if sediments in a CDF contain cadmium levels of 4 mg/kg or greater and those sediments cannot be covered with Operation and Maintenance material within 6 months. Section 5 of the EIS, Appendix D, and Appendix M have been revised to indicate this.

Concur. The District will coordinate any bird tissue sampling efforts with the FWS.

637-BB-141-EV22

Comment: "The Department accepts the Corps' use of 4 ppm cadmium concentration in capping material as a trigger for remedial action in DMCA's. The Department understands that the Corps will move a DMCA to higher priority in the rotation for Operations and Maintenance (O&M) sediment placement and vegetation monitoring if 25 cumulative acres are found to have a cadmium concentration greater than or equal to 4 ppm. Sampling and placement will continue until the DMCA has less than 25 cumulative acres with a cadmium concentration greater than or equal to 4 ppm."

Response: Concur.

637-BB-141-EV23, 637-BB-141-EV24

Comment: "The Savannah estuary is a complex system and predicting how this system may respond to substantial physical alterations (channel deepening, flow diversions, etc.) is fraught with uncertainties, which are well acknowledged within the DEIS. However, based on an analysis prepared by Kinetic Analysis Corporation (KAC), the DEIS concludes that the hydrodynamic model probably over-predicts salinity and under-predicts dissolved oxygen; i.e., the model errs towards the side of simulating conditions worse than would actually occur. We believe this analysis may seriously misrepresent the risk associated with the water quality predictions. It is quite possible that the hydrodynamic model does not

predict worst-case conditions. With the exception of the new channel depth, the KAC analysis relied upon the existing geometry of the Savannah River estuary. Several mitigation measures would significantly modify the system geometry, including significant flow diversion at McCoys Cut, closing Rifle Cut, filling the Back River sediment basin, and removing the tide gate. Flow routing and flow volume in the three main river channels would become significantly different from the current system. Therefore, we believe the degree of risk and uncertainty regarding expected water quality impacts, and in turn, wetland impacts, is considerably higher than the KAC analysis suggests. For this and other reasons, the Department recommends extending the proposed post-construction monitoring from 5 years to 10 years."

Response: Please see previous response concerning extending the post-construction monitoring program from 5 to 10 years.

Please see the District's previous response/rationale why the post-construction monitoring was not extended from five to ten years. Namely, five years of post-monitoring data collection will provide sufficient information for reasoned decision-making for resources of concern within the project area. However, post-construction monitoring of the wetland restoration at Site 1S for consistency with USACE Regulatory requirements.

Page 5

637-BB-141-EC01

Comment: *"The first paragraph of the Abstract discusses channel depths and then states that 70% of vessels do not call on Savannah at their maximum capacity or design draft, which implies that all light-loading is due to channel depth limitations. The Corps should include information on the percentage of vessels with loads constrained by channel depth and the percentage of light-loading due to other factors, such as prior calls at other ports. Additionally, the DEIS should include the predicted percentage of ships that will call on the port fully loaded or leave fully loaded if the channel is deepened."*

Response: The statement is not intended to imply that light loading of containerships is solely due to channel depth limitations. Rather the statement is intended to express in relative terms, to what extent container vessels calling Savannah incur some restrictions due to channel depth. The statement could also be worded as follows: "About 70% of the container ships that currently call at Savannah have design drafts greater than 38 feet, so they would need tidal assistance to safely traverse the channel when fully loaded." Those vessels either arrive and depart in light loaded conditions or have to make use of tides.

Containerships seldom sail at their design drafts. There are many reasons why vessels light load, among them are prior and post port limitations and the channel itself. In some instances a vessel "cubes" out before it "loads" out. To cube out means that a vessel has all of its spaces filled with either laden or empty containers, but the weight of the cargo and containers is such that it does not require the vessel's entire design draft. In other instances, vessels may not arrive or depart a particular port at its design draft because there is not enough cargo imported or exported on that particular leg of their trip. It is

neither possible nor necessary to estimate to percentage of light loads due to various factors. Tables 108, 112, and 113 in the economic appendix show estimated sailing draft distributions of various classes of containerhips, and the distributions of sailing drafts in the without project conditions and with each of the alternatives.

637-BB-141-EV25

Comment: *"The first paragraph of this section states that the tentatively recommended plan is either the 47-foot alternative or the 48-foot alternative. The third paragraph describes the tentatively recommended plan as the 48-foot alternative. The Errata Sheet of December 17, 2010, states that various references to the 48-foot alternative throughout the GRR and DEIS "should not be interpreted as a recommendation or preference for that alternative over the tentatively selected -47 feet NED [plan]." On September 9, 2010, the FWS provided comments on preliminary drafts of the GRR and DEIS, identified -45 feet as its preferred alternative for deepening the harbor and stated it did not support the 48-foot alternative. The final EIS will necessarily need to revise this section to discuss the multi-agency rationale for what is ultimately determined as the final plan selection."*

Response: The Corps acknowledges the USDI's preference for the 45-foot depth alternative. The FEIS will contain the views expressed by the Cooperating Agencies, and the document will address all agency comments received during the DEIS process.

637-BB-141-EC02

Comment: *"This section states that 70% of vessels do not call on Savannah at their maximum capacity or design draft, which implies that all light-loading is due to channel depth limitations. The Corps should include information on the percentage of vessels with loads constrained by channel depth and the percentage of light-loading due to other factors, such as prior calls at other ports. Additionally, the DEIS should include the predicted percentage of ships that will call on the port fully loaded or leave fully loaded if the channel is deepened."*

Response: The statement is not intended to imply that light loading of containerhips is solely due to channel depth limitations. Rather the statement is intended to express in relative terms, to what extent container vessels calling Savannah incur some restrictions due to channel depth. The statement could also be worded as follows: "About 70% of the container ships that currently call at Savannah have design drafts greater than 38 feet, so they would need tidal assistance to safely traverse the channel when fully loaded." Those vessels either arrive and depart in light loaded conditions or have to make use of tides.

Containerhips seldom sail at their design drafts. There are many reasons why vessels light load, among them are prior and post port limitations and the channel itself. In some instances a vessel "cubes" out before it "loads" out. To cube out means that a vessel has all of its spaces filled with either laden or empty containers, but the weight of the cargo and containers is such that it does not require the vessel's entire design draft. In other instances, vessels may not arrive or depart a particular port at its design draft because there is not enough cargo imported or exported on that particular leg of their trip. It is neither possible nor necessary to estimate to percentage of light loads due to various factors. Tables

108, 112, and 113 in the economic appendix show estimated sailing draft distributions of various classes of container ships, and the distributions of sailing drafts in the without project conditions and with each of the alternatives.

637-BB-141-EV26

Comment: *"4.01.2, Geology, page 4-7. The amount of dredged material by station for both inner harbor and outer harbor do not match between Section 3 (Table 3-8, pg. 3-27; Table 3-9, pg. 3-28) and Section 4 (Table 4-4, pg. 4-7; Table 4-5, pg. 4-7). The Department recommends corrections for clarity."*

Response: Concur. The tables have been revised for consistency.

Page 6

637-BB-141-EV27

Comment: *"The discussion on DO standards is confusing. The new DO standard established by the State of Georgia is not less than 5.0 mg/L throughout the year with an instantaneous minimum of 4.0 mg/L. A number of site-specific DO standards are listed. For clarity, this section should explain how the new standard of 5.0 mg/L compares to the measured monthly ranges of DO in the Savannah River at the currently authorized depth of 42 feet."*

Response: Concur. The DEIS [page 4-14] has been revised to reflect the details of Georgia's water quality standards for Savannah Harbor. Additional information has been added to provide the reader with a better understanding of existing background dissolved oxygen levels.

637-BB-141-EV28

Comment: *"This section states that optimum striped bass spawning success requires salinity less than 1.7 ppt. Studies on the Savannah River indicate that striped bass spawn almost exclusively in areas where maximum salinity near the surface is less than 1.0 ppt. The Department recommends revision to state salinity of less than 1.0 ppt is optimum."*

Response: Do not concur. The USFWS participated in the Fisheries Interagency Coordination Team which guided the Corps in its evaluations on Striped bass for this project. The Fisheries ICT was comprised of fishery experts from USFWS, NOAA Fisheries, EPA, GA DNR-WRD, and SC DNR. Representatives of those organizations reviewed literature for Striped bass and, in particular, data from studies conducted in the Savannah River Basin. The criteria include the following: "Studies on the Savannah River indicate that striped bass almost exclusively spawn in areas where maximum salinity near the surface is less than one ppt (Van Den Avyle et al 1990, Reinert and Jennings 1998, Will et al 2000)." As a result, the interagency team recommended the Corps use a 90%-tile salinity value of ≤ 1 ppt to define acceptable Striped bass spawning habitat.

637-BB-141-EV29

Comment: *"This section should discuss the common reed (Phragmites australis) as an invasive species. The document states elsewhere (page 4-55, section 4.07) that common reed will probably dominate the*

confined disposal facilities (CDFs). We believe that the common reed in the CDFs is the invasive strain. According to the U.S. Geological Survey (USGS), the invasive strain originated in Europe and was possibly spread via ships' ballast. Section 5 of the final EIS should evaluate the potential for the invasive strain to crowd out native species in marshes adjacent to the CDFs."

Response: Concur. A discussion of the common reed (*Phragmites australis*) has been added to the Invasive Species section. Discussion has also been added to Section 5.0 regarding the potential for this invasive species to crowd out native species in marshes adjacent to the CDFs.

637-BB-141-EV30

Comment: *"This section addresses only one pathway, ballast water, for introduction of aquatic invasive species. Introduction of invasive species in the Savannah Harbor, both aquatic and terrestrial, is not limited to ballast water. Insects in pallets, or plants and seeds in soil on containers, are two examples of other pathways. Invasive species can dramatically alter an ecosystem, which is a major concern for the Savannah NWR. This section should address other pathways and terrestrial systems as well as aquatic systems."*

Response: Concur. The discussion of introduction pathways of invasive species has been expanded.

637-BB-141-EV31

Comment: *"The Savannah NWR is 29,175 acres, not 25,600 acres."*

Response: Concur. The acreage for the SNWR on Page 4-47 has been corrected.

637-BB-141-EV32

Comment: *"This section refers to a 1992 Planning Aid Report, but the FWS report in question is dated September 16, 1982."*

Response: Concur. Page 4-62 has been revised.

637-BB-141-EV33

Comment: *"The text states that the first two entries in Table 5-1 are Refuge lands, but the table labels the first three entries as Refuge lands. Figure 5-1 is illegible, but appears to depict the Kings Island Turning Basin along with another area for dredging. It is unclear where the third area of excavation is located (we believe 96+000 to 97+000). Figure 5-2 appears to depict the non-Refuge portion of excavation from 86+000 to 88+500, but it too is unclear. A proximity map would help locate these areas in relation to the Savannah NWR."*

Response: Concur. The text on Page 5-1 has been revised to indicate that the first three areas shown in Figure 5-1 are within Refuge lands. The graphics supporting this discussion have been improved to allow the reader to identify the locations/areal extent of project affected lands more easily.

637-BB-141-EV34

Comment: *"The discussion in the opening paragraph references Figure 5-52 as CDF 1S; however, Figure 5-52 is a picture of Old Fort Jackson (on p. 5-134). We believe the correct reference is to Figure 5-4 on page 5-7."*

Response: Concur. The text on Page 5-6 has been revised to refer to Figure 5-4.

Page 7

637-BB-141-EV35

Comment: *"The Corps proposes to restore up to 45 acres at Area 1S on the Savannah NWR, using 14.5 acres as "advance mitigation" for direct impacts to salt marsh. These impacts include widening channel bends and turning basins both on and off the Savannah NWR. "Advance mitigation" is the functional equivalent of a mitigation bank. FWS Mitigation Policy (64 FR 49229-49234) does not allow the use of NWR lands for mitigation banks; therefore, the Department cannot support the 14.5 acres as "advance mitigation." "*

Response: Restoration of 42 acres of marsh within Disposal Area 1-S exceeds the construction project's mitigation requirements (28.75 acres). Periodically, operation of the existing Federal Navigation Project adversely impacts small amounts of brackish and saltmarsh wetlands through activities conducted at the project's confined disposal facilities. When such instances are anticipated, the District develops mitigation to compensate for the impacts. Coordination with the USFWS and the Wetland Interagency Coordination Team have identified the potential for restoration of roughly 45 acres of brackish marsh at Disposal Area 1-S. Such restoration agrees with the goals of the USFWS and the Savannah National Wildlife Refuge to restore Refuge lands to more ecologically valuable conditions, when possible. Restoration of Disposal Area 1-S is the best potential brackish marsh mitigation activity in the estuary. In the future, the Corps would likely request approval from the Service to complete the remaining restoration of the site if it does not complete that work if/when harbor deepening occurs. Restoration of the entire site at one time would be better for the environment (and the Refuge) than would construction in that area on multiple occasions. The Corps proposes to restore the entire site at one time and consider the acreage that it restores beyond the project's initial mitigation requirement as advance mitigation. Performing mitigation in advance of an impact is generally preferred by natural resource agencies. The Corps is required to perform its mitigation prior to, or at the same time as the activity that causes the impact. Since the Corps would use the advance mitigation to compensate for future impacts resulting from the same overall project – the Savannah Harbor Navigation Project – this would not be a mitigation bank. The advance mitigation acreage would not be available for use by others or for other projects. Instead, it would be reserved for Federal government use as wetland mitigation solely for the Savannah Harbor Navigation Project. Outside interests could not purchase the wetland credits. As a result, the restoration of the remaining roughly 16 acres at Disposal Area 1S should not be considered a mitigation bank.

637-BB-141-EV36

Comment: *"The Corps proposes to restore up to 45 acres at Area 1S on the Savannah NWR, using 14.5 acres as "advance mitigation" for direct impacts to salt marsh. These impacts include widening channel bends and turning basins both on and off the Savannah NWR. "Advance mitigation" is the functional equivalent of a mitigation bank. FWS Mitigation Policy (64 FR 49229-49234) does not allow the use of NWR lands for mitigation banks; therefore, the Department cannot support the 14.5 acres as "advance mitigation."*

Response: Concur. The monitoring plan (Appendix C) has been revised to include monitoring of invasive species at the marsh restoration site on Disposal Area 1-S.

637-BB-141-EV37

Comment: *"This section references a USGS report, by the Cooperative Research Unit, titled "Simulation of Water Levels and Salinity in the Rivers and Tidal Marshes in the Vicinity of the Savannah National Wildlife Refuge, Coastal South Carolina and Georgia" but does not provide the reference. Suggest the Final EIS include the reference (Conrads et al, 2006) in the text and in the References section."*

Response: Concur. The subject reference has been added to both the text and the References section.

637-BB-141-EV38

Comment: *"This section states "In March 2007, the Federal Cooperating Agencies discussed a USGS proposal to revise the linkage to increase its usefulness for evaluating potential mitigation measures." but the proposal was rejected. Suggest the Final EIS include a short explanation, and relevant information, on how this decision was reached."*

Response: Concur. The text has been revised to include details why the decision was made not to modify the model as suggested by the USGS.

637-BB-141-EV39

Comment: *"This section states that the primary stress to tidal freshwater marsh is prolonged drought, which is not supported by evidence. In 1875, when the controlling depth of the navigation channel was 12-15 feet, the Savannah estuary supported an estimated 12,000 acres of tidal freshwater marsh. In 2005, when the controlling depth was 42 feet, the estuary supported only 3,269 or 4,072 acres (depending on study method used). This section should instead state that the inland intrusion of salt water resulting from channel deepening is a constant stress on tidal freshwater marsh, and that prolonged drought exacerbates this stress."*

Response: The EIS provides a detailed discussion regarding the relationship of previous harbor channel deepening and how these modifications fostered a progressive increase in upstream salinity levels. In turn, those increases lessened the extent of tidal freshwater marsh. The subject paragraph was intended to describe the baseline condition with respect to current stresses, e.g., prolonged drought and sea level rise, on the remaining tidal freshwater marsh.

637-BB-141-EV40

Comment: *"This section states the Corps evaluated the effects of sea level rise on tidal freshwater marsh. The Department maintains that sea level rise would have a negligible impact on the Savannah NWR if not for the cumulative impact of previous harbor deepening."*

Response: This section of the document discusses the three actions that will most likely affect the remaining tidal freshwater marsh, viz., prolonged drought, sea level rise, and harbor deepening.

637-BB-141-EV41

Comment: *"This section examines various alterations to rivers and creeks to reduce the impacts to tidal freshwater marsh. It states that the proposed mitigation for the 47-foot alternative is predicated on a "base year" (immediately following construction) impact of 223 acres instead of a project-life average annual impact consistent with Corps policy. The average annual impact is lower than 223 acres due to the effect of sea level rise during the next 50 years that would occur without the project. The Department maintains that sea level rise would have a negligible impact on the Savannah NWR if not for the cumulative impact of previous harbor deepening. Therefore, we support obtaining a waiver from the Corps' policy in this instance to instead implement the agency-coordinated level of mitigation."*

Response: See previous responses on this issue. The District has requested a waiver from Corps policy, i.e., removal of the requirement to use an average annual analysis of project impacts and mitigation requirements.

Page 8

637-BB-141-EV42

Comment: *"This section should compare the modeled DO levels in the Savannah River under the LLP and NED depth plans with the State of Georgia's DO standard. The new Georgia DO standard is not less than 5.0 mg/L throughout the year, with an instantaneous minimum of 4.0 mg/L."*

Response: The discussion [pages 5: 37-39] focuses on the impacts of the various harbor deepening alternatives and how each would affect the dissolved oxygen regime in Savannah Harbor. The proposed oxygen injection system is a mitigation measure which seeks to produce a "zero-sum" as regards dissolved oxygen and is not designed to bring the harbor into compliance with Georgia water quality standards.

637-BB-141-EV43

Comment: *"The document states the "The Corps had an Independent Technical Review performed of the chloride model by a staff member of the USGS in Columbia, SC. The reviewer expressed about the ability of the model to make reliable predictions at the low chloride concentrations occurring at the City's intake." Suggest the Final EIS explain "what" the reviewer expressed and include documentation of the reviewer's expertise."*

Response: The Corps has supplemented the modeling efforts described in the DEIS to address concerns about detection of chloride ions [even at low levels] at the City of Savannah's water supply intake. Those revised analyses are included in the FEIS.

637-BB-141-EV44, 637-BB-141-EV45

Comment: *"This section describes a secondary (supplemental) water supply intake line for the City of Savannah to be constructed if needed. Based on a preliminary review, the Department would prefer intake Site 1, because intake Site 2 is likely to adversely affect more wetland and wildlife habitat. The Department requests further coordination to evaluate impacts and make recommendations if the supplemental intake site is needed in the future."*

Response: If a supplemental water supply intake line were required, the District would select a site that would meet the needs of the City while minimizing impacts to wetlands and fish and wildlife resources [as required by the Section 404 (b)(1) Guidelines]. If impacts to wetlands were unavoidable, required mitigation would be provided.

The District would coordinate details of the construction with the resource agencies if a supplemental intake line is determined to be needed.

637-BB-141-EV46

Comment: *"The Corps proposes to fund a stocking program for striped bass based on the amount of spawning and early life stage habitat lost due to water quality changes resulting from harbor deepening: 'the extent of the stocking needed could be reduced to the amount of habitat predicted to be impacted by the project. Thus, the percentage of habitat loss could be multiplied by the cost for a full-scale stocking program to determine the amount that would be sufficient to compensate for the habitat loss that is expected.' The expected loss of habitat is 2.9% for the 45-foot alternative and 26.9% for the 47-foot alternative. The final EIS should include a proposal to monitor/measure post-construction loss of striped bass habitat. The final adaptive management plan should address striped bass, and if habitat loss exceeds the amount predicted, include provisions and assurances to increase stocking funds accordingly."*

Response: Concur. The Monitoring and Adaptive Management Plan has been revised to include verification of model predictions regarding impacts to Striped bass habitat. These studies would be conducted during the fourth year of the Post-Construction Monitoring.

637-BB-141-EV47

Comment: *"This section should clarify whether the Corps intends to collect 30 or 86 sediment samples per DMCA. The Department has previously stated a concern that 30 samples are not enough. The Corps proposes taking samples 15 cm deep; the Department recommends 86 samples of the cap material per DMCA taken 30 cm deep. The DEIS sometimes refers to 7 ppm of cadmium in the capping material to trigger remedial action. The Department recommends substituting a threshold of 4 ppm throughout the DEIS for clarity. This section should fully summarize bird tissue monitoring, which is partially summarized*

in Appendix D, page 23, and Appendix M, page 84. The Department understood that the Corps had agreed to bird tissue monitoring independent of monitoring cadmium soil concentration levels. Tissue monitoring should occur: 1) prior to sediment placement to collect baseline data; 2) during sediment placement; and 3) post placement until 3 consecutive years of samples contain cadmium concentrations that are less than the potential adverse effect level, which is to be determined. The Department requests that the Corps continue to coordinate with the FWS prior to completion of the final EIS to finalize plans for biological monitoring within DMCA's, including tissue sampling."

Response: Page 21 of Appendix D of the DEIS says that the Corps would monitor cadmium in the surface of the CDF cap/cover. If the distribution of sediments with cadmium concentration ≥ 4 ppm extends over a cumulative total of 25 acres or more of the capping/covering layer, the Corps would perform biological monitoring within the DMCA if the area cannot be covered by O&M sediments within 6 months. We will clarify this position throughout the EIS, as well as the Corps' intent to take 86 sediment samples in each DMCA where cadmium-laden sediments would be deposited. After receiving the DOI comments, the District examined the depth of plant roots in the CDFs. In general, we found that the majority of the roots of plants found in the CDFs that serve as food for invertebrates average 7.5 inches and extend to 9.2 inches below the surface. Some species with tap roots extend further, but those species are not commonly used for forage by insects, birds, or animals. Based on this inspection, we concur that sampling dry and moist sediments to a depth of 30 cm (12 inches) would be sufficient to characterize the sediment cadmium concentrations that would be available for uptake into biotic systems. In locations with standing water, cadmium would be essentially insoluble and the potential path for uptake would be through invertebrates residing in the upper layers of the sediment. Anoxic conditions would occur a few inches below the sediment surface, so we believe that sampling to a depth of 15 cm (6 inches) is sufficient to characterize the sediment cadmium concentrations in areas with standing water. Once initiated, tissue sampling is initiated, it would be conducted for a period of five years unless tissue levels do not exceed potential adverse levels for three consecutive years. Then no further monitoring would be deemed necessary.

Page 9

637-BB-141-EV48

Comment: *"Groundwater conditions were simulated with a constant pumping rate 200 years into the future to estimate the timing of sea water intrusion into the Upper Floridan Aquifer. The DEIS states elsewhere that Chatham and Effingham counties are experiencing population growth, and it is reasonable to assume that industrial water use may also increase with the potential harbor expansion. For the final EIS, the Department recommends revisiting the groundwater simulations with consideration of likely increases in pumping rates."*

Response: The groundwater pumping rates were simulated using a constant rate for 200 years. The State of Georgia required this approach, which is a conservative one in light of EPD's recent actions to reduce groundwater removal from the Upper Floridan aquifer. GA DNR-EPD has been placed a restriction on any new permits for groundwater withdrawal and they are mandating reductions in

groundwater withdrawal for existing permittees. Based on these EPD initiatives, the analysis in the EIS of project impacts is considered conservative. The District agrees that increased demand for water in Chatham and Effingham counties is likely; however, unless the above mandates are rescinded, this demand will not be met with increased withdrawals from the aquifer.

637-BB-141-EV49

Comment: *"This section discusses direct dredging impacts and generally concludes that expected impacts are minor. However, the text does not describe the long-standing striped bass spawning season window that restricts dredging and is likely largely responsible for the minor impacts conclusion. On Page 14 of Appendix H is a statement that hydraulic dredging is not conducted in Savannah Harbor during the striped bass spawning season. The Corps should revise Section 5.7 and other relevant sections to discuss the striped bass spawning window, and describe where and when hydraulic harbor deepening dredging is restricted."*

Response: Concur. Section 5.7 has been revised to include a discussion of dredging restrictions during the Striped bass spawning season.

637-BB-141-EV50

Comment: *"The flow of the Savannah River is highly variable within and between years; therefore the Corps should specify the period of record used for the following calculation: "the average daily freshwater flow in the Savannah River at Clio is about 11,290 cfs." The analysis presented in this paragraph should use data that represents the seasonal timing and flow conditions typical during channel maintenance operations, and if necessary, revise the conclusions based on this analysis."*

Response: The EIS is revised to clarify the period of record used in the calculation of average daily freshwater river flow. Some portion of the navigation channel is being maintained every month of the year. The main point of that paragraph was the comparison between the volume flowing through a cutterhead dredge (70 cfs) and that in the entire river (average of 11,290 cfs). A large dredge captures a very small proportion of the volume of water in the Savannah River at any given time. Therefore, entrainment concerns associated with the operation of a hydraulic pipeline dredge are minimal. Even if drought flows of 4,000 cfs occur in the Savannah River estuary when dredging occurs, the same relationship exists and the same conclusion can be made.

637-BB-141-EV51

Comment: *"This section covers the introduction of invasive species through ballast water, but should also address other pathways through ports, such as insect larva in pallets (e.g., red bay ambrosia beetle), or seeds and plants 'hitchhiking' in soil on containers."*

Response: Concur. This section has been revised to include this discussion.

637-BB-141-EV52

Comment: *"The Department disagrees with this statement: "The Corps believes that with implementation of the Mitigation Plan and Monitoring and Adaptive Management Plan, the proposed action would not have significant adverse impacts on the environment." Under the 47- and 48-foot alternatives, which the Corps identifies as the tentatively recommended plans, the Savannah estuary would lose an estimated 223 and 337 acres of tidal freshwater marsh, respectively. We have identified loss of tidal freshwater marsh as the "most important impact criterion in the Savannah Estuary" (page 5-10). In-kind mitigation for this loss is not possible; therefore, significant adverse impacts remain even with implementation of the mitigation plan for the 47- and 48-foot alternatives. This is why the Department prefers the 45-foot alternative among the action alternatives, because it minimizes the loss of freshwater tidal wetlands, impacts to Savannah National Wildlife Refuge (NWR), and risk and uncertainty of impacts to trust fish and wildlife resources."*

Response: That statement has been removed from the EIS. It has been replaced with statements that indicate that the Mitigation and Monitoring and Adaptive Management Plan would provide adequate mitigation for all alternative depths considered.

637-BB-141-EV53

Comment: *"Manatees have been observed on the Savannah NWR since 1987. Six manatees were observed on the Savannah NWR on August 26, 2010, at a rice trunk on the Wildlife Drive. This area is directly across from Port Wentworth on the Back River. In September of 2008, four manatees were found in the Savannah River (Front River) downstream of the Georgia Ports Authority Ocean Terminal that had been killed in a ship-related incident. This section states that manatee occurrence in the area is rare. Manatees have site fidelity to summer habitat sites, therefore, the FWS would expect the six observed on the Savannah NWR to return. The Georgia Department of Natural Resources (GADNR) has data on manatee mortality and public sightings in the Savannah River. From FWS personnel's observations and discussions with the GADNR, the FWS would not characterize manatee occurrence as rare. Usage is regular enough to characterize manatee occurrence in the Savannah River estuary as a small summer resident population."*

Response: The phrase "their occurrence is rare" has been removed from the document.

Page 10

637-BB-141-EV54

Comment: *"This section states that the proposed mitigation for the 47-foot alternative is predicated on a "base year" (immediately following construction) impact of 223 acres instead of a project-life average annual impact consistent with Corps policy. The average annual impact is lower than 223 acres due to the effect of sea level rise during the next 50 years that would occur without the project. The Department maintains that sea level rise would have a negligible impact on the Savannah NWR if not for the*

cumulative impact of previous harbor deepening. Therefore, we support obtaining a waiver from the Corps' policy in this instance to instead implement the agency-coordinated level of mitigation."

Response: See previous response to this issue. The waiver has been requested.

637-BB-141-EV55

Comment: *"The MACTEC engineering firm's report on the test of a DO injection system concluded that the system could improve a DO deficit by 0.6-0.7 mg/l. An independent peer review by USGS found that this conclusion was not supported by the data. The USGS review found instead that the natural tidal cycle accounted for most of the variation in DO levels during the demonstration. This section of the final EIS should address the USGS report. The uncertainty regarding the results of the efforts to improve DO deficiencies is additional justification for expanding the water quality monitoring efforts from 5 to 10 years."*

Response: As proposed, the project includes five years of water quality monitoring. The project would install and operate seven new continuous water quality monitors and use data from other monitors that already collect data in the harbor. The monitoring also includes a Transfer Efficiency Study of the oxygen injection system after installation. The District believes that water quality conditions in Savannah Harbor will have reached equilibrium well before the end of the five-year monitoring plan. Hence, sufficient data will have been collected to ascertain project impacts on the water quality regime.

637-BB-141-EV56

Comment: *"The acreages mentioned on these pages do not correspond with those found in other places in the DEIS. Pages 48 and 50 mention 15.68 acres of brackish marsh lost, while DEIS sections 5.1.1.1 and 5.1.1.2 mention 14.08 acres. Appendix C, pages 49 and 50 state the restoration area is 45 acres, while page 49 states the restoration area is 42 acres. Figure 19 on page 49 depicts two restoration areas of 34 and 8 acres for a total of 42 acres. Section 5.1.1.2 page 5-6 states the restoration area is 42 acres. The Department recommends correcting any mistakes in these sections or explaining the apparent inconsistencies."*

Response: Concur. The Corps has revised the EIS to clarify these numbers.

637-BB-141-EV57

Comment: *"This section discusses wetland restoration on site 15 for direct impacts to brackish marsh. The desired vegetation outcome is to establish a mixed brackish marsh, similar to adjacent marsh, on the site. Chinese tallow tree and common reed, both highly invasive exotic species, have been identified in the marshes near the restoration site. Monitoring the success of the re-vegetation for 5 years should include control measures for exotic and invasive species, if detected."*

Response: Concur. The monitoring plan for the restored wetland area has been revised to include monitoring for invasive species and implementation of control measures, if required.

637-BB-141-EV58

Comment: *"On page 49, it is not clear what is meant by "The Corps would expand our restoration acreage to include their acreage (1.7 acres)." Please clarify."*

Response: The District has revised this section as follows: "The Georgia Ports Authority graded down a 1.7 acre area on Disposal Area 1-S several years ago as mitigation for habitat and functional wetland losses attendant to previous facility upgrade. This area is within the restoration site which will be used as mitigation for the SHEP. Together they will provide a continuous 42.0 acre restored wetland site."

Page 11

637-BB-141-EV59

Comment: *"On page 50, the Corps states it intends to restore all of Area 1S, using a portion for "advance mitigation." The Department regards "advance mitigation" in this context as the functional equivalent of a mitigation bank, and FWS Mitigation Policy (64 FR 49229-49234) does not allow the use of NWR lands for mitigation banks."*

Response: See previous response. Mitigation for all the project's direct wetland impacts can be accomplished via restoring 25.8 acres on Disposal Area 1-S. An additional 14.5 contiguous acres would also be restored on Area 1-S which would be applied to future wetland mitigation needs for future Savannah Harbor upgrades. The additional credits from restoring the remainder of the site would only be used by the Federal government for Savannah Harbor activities. Hence, this would not constitute a wetland mitigation bank, since credits would not be sold to other entities.

637-BB-141-EV60

Comment: *"This section states that the proposed mitigation for the 47-foot alternative is predicated on a "base year" (immediately following construction) impact of 223 acres instead of a project-life average annual impact consistent with Corps policy. The average annual impact is lower than 223 acres due to the effect of sea level rise during the next 50 years that would occur without the project. The Department maintains that sea level rise would have a negligible impact on the Savannah NWR if not for the cumulative impact of previous harbor deepening. Therefore, we support obtaining a waiver from the Corps' policy in this instance to instead implement the agency-coordinated level of mitigation."*

Response: See previous response. Savannah District has requested a waiver from the requirements of ER 1105-2-100.

637-BB-141-EV61

Comment: *"The following statement is misleading: "If a higher rate of sea level rise actually occurs, some of the freshwater marshes would convert to more saline species, so they would not be available for impact by harbor deepening." These marshes are at risk to sea level rise only because of the cumulative effect of previous harbor deepening. Tidal freshwater marshes would not be at risk due to sea level rise*

at the harbor's original depth. Additionally, the impacts to freshwater marsh from harbor deepening will occur quickly compared to the timeframe for sea level rise."

Response: See previous response. The Savannah District has requested a waiver from the requirements of ER 1105-2-100 based on the fact that project impacts to tidal freshwater marshes would occur soon after the harbor is deepened.

637-BB-141-EV62

Comment: *"These pages discuss sea level rise and the possibility of over-mitigating if sea level rises faster than projected. The Corps proposes to reassess sea level rise at the end of the project's life in 50 years and assign wetlands mitigation credits to the project in an amount equivalent to the over-mitigation. The Department regards "advance mitigation" in this context as the functional equivalent of a mitigation bank, and FWS Mitigation Policy (64 FR 49229-49234) does not allow the use of NWR lands for mitigation banks. This section, among others in the DEIS, also states that the proposed mitigation for the 47-foot alternative is predicated on a "base year" (immediately following construction) impact of 223 acres instead of a project-life average annual impact consistent with Corps policy. The average annual impact is lower than 223 acres due to the effect of sea level rise during the next 50 years that would occur without the project. The Department maintains that sea level rise would have a negligible impact on the Savannah NWR if not for the cumulative impact of previous harbor deepening. Therefore, we support obtaining a waiver from the Corps' policy in this instance to instead implement the agency-coordinated level of mitigation."*

Response: See previous responses. The waiver has been requested.

637-BB-141-EV63, 637-BB-141-EV64

Comment: *"This section discusses a fishway at New Savannah Bluff Lock and Dam as the primary mitigation feature for the project's impacts to shortnose sturgeon. Fishway effectiveness varies considerably and is difficult to predict. If effective, this measure would provide shortnose sturgeon upstream passage to the Augusta shoals and other riverine spawning areas. Dam removal would represent a more certain means to provide both upstream and downstream passage for shortnose sturgeon and other species, and would also restore riverine characteristics to this portion of the basin; therefore, the Department would prefer dam removal in lieu of a fishway. The Department requests that the Corps continue to coordinate with the FWS to finalize plans for either fishway design and construction or dam removal."*

Response: Removal of the New Savannah Bluff Lock and Dam cannot be recommended at this time. Although the structure is no longer used to support navigation on the Savannah River, most recent direction from Congress was for the Corps to rehabilitate the structure and convey it to local interests.

Concur. The District will continue to coordinate with the USFWS and the other Cooperating Agencies about the design of the fishway at New Savannah Bluff Lock and Dam.

637-BB-141-EV65

Comment: *"This section describes a secondary (supplemental) water supply intake line for the City of Savannah to be constructed if needed. Based on a preliminary review, the Department would prefer intake Site 1, because intake Site 2 is likely to adversely affect more wetland and wildlife habitat. The Department requests further coordination to evaluate impacts and make recommendations if the supplemental intake site is needed in the future."*

Response: See previous response on this issue.

Page 12

7-BB-141-EV66

Comment: *"We believe the statement: 'The plug would be constructed of fill and rock and would extend to EL 10 (above the Mean High Water line)' is incorrect. It is our understanding that the plug in Rifle Cut will extend to EL 10 above mean low water, which is 2 feet above mean high water -- not 10 feet, as indicated."*

Response: Concur. The text has been revised to indicate that the top of the plug in Rifle Cut would be at elevation 10 which is two feet above MHW.

637-BB-141-EV67

Comment: *"This section should discuss the timing of acquiring the mitigation lands. The Department recommends beginning no later than the start of construction and completing the acquisitions within 2 years."*

Response: Concur. The project would begin acquiring the preservation lands the first year that Congress provides construction funds. It is the Corps' and GPA's intent to complete the acquisition within the first two years, but that may not be possible because of number of actions that would need to be completed. The acquisition requirements include completing various real estate actions such as appraisals, Environmental Baseline Surveys, etc. Discussion to this effect has been added to the Mitigation Plan [Appendix C] and Section VIII.

637-BB-141-EV68

Comment: *"The Corps proposes to restore the entire site at CDF 1S, using a portion as 'advance mitigation' for direct impacts to salt marsh. Claiming credit for restoration to offset as-of-yet unidentified impacts elsewhere in the future is the functional equivalent of a mitigation bank. FWS Mitigation Policy (64 FR 49229-49234) does not allow the use of NWR lands for mitigation banks; therefore, the Department cannot support restoration at this site as advance mitigation."*

Response: See previous responses concerning restoration of Disposal Area 1S and advance wetland mitigation credits.

637-BB-141-EV69

Comment: *"Successful wetland restoration is dependent on three primary factors: soil, hydrology and vegetation. The proposed dredged material removal should expose the original wetland soil and restore the site to the elevation of adjacent marshes. Construction of a "feeder" creek system toward the interior of the restoration site from Middle River will facilitate tidal exchange; however, if restored elevations do not properly restore tidal flow, invasive vegetation with almost no wildlife value may occupy the site. The desired vegetation outcome is to establish a mixed brackish marsh, similar to adjacent marsh, on the site. Chinese tallow tree and common reed, both highly invasive exotic species, have been identified in the marshes near the restoration site. Monitoring the success of the re-vegetation for 5 years should include control measures for exotic and invasive species, if detected."*

Response: Concur. See previous responses on this issue.

637-BB-141-EV70

Comment: *"The following statement, from page 92, is inconsistent with the text of DEIS Section 5.1.1.2: "Calculations derived from the SOP indicate that approximately 25.8 acres of restored saltmarsh would be required to mitigate for the 14.08 acres of impact. When combined with the 1.7 acres of previous mitigation, the resulting acreage of the mitigation site would be 25.8 acres." Adding 1.7 acres of mitigation to 25.8 acres equals 27.5 acres."*

Response: Page 92 has been revised. The Corps intends to restore about 42 acres of wetlands on Disposal Area 1S, in addition to the 1.7 acres previously graded down by the Georgia Ports Authority.

637-BB-141-EV71

Comment: *"Was the Draft Savannah Harbor TMDL for Dissolved Oxygen released by the U.S. Environmental Protection Agency in April 2010 evaluated for effects of the mitigation plan? With the changes in the flow dynamics, the Front River will have less flow and the residence times in the Harbor will increase. These changes could have a substantial impact on the waste load allocation. The effects on the allowable waste load to the system by the Project are not only caused by the deepening of the navigation channel but also the mitigation features affecting the flow dynamics of the estuary."*

Response: The project includes oxygen injection to offset [mitigate] adverse impacts resulting from all of the deepening alternatives. The District understands that potential impacts to dissolved oxygen are the primary concern in regards to the Savannah Harbor Draft TMDL. The modeling that the Corps performed ensure that the proposed mitigation would remove the adverse effects of harbor deepening on dissolved oxygen levels in the harbor. Water quality experts in EPA or GA DNR have not expressed any concern regarding changes in flow and any potential subsequent impacts to the TMDL from implementation of the harbor deepening or its mitigation.

637-BB-141-EV72

Comment: *"More than two years (2009 and 2010) of flow data have been collected on the Front, Middle, and Little Back Rivers. Six of the seven mitigation features involve alterations to flow paths in the system. Has the two years of measured flow been thoroughly compared with the flow predictions of the model? The Draft Savannah Harbor TMDL showed a frequency distribution for the Little Back River. The model comparisons should include daily tidally filtered flows, flow volumes over specified periods, and flow partitioning between the three rivers under various flow regimes."*

Response: This specific analysis has not been conducted. The District performed all model analyses requested by the Water Quality Interagency Coordination Team.

Page 13

637-BB-141-EV73

Comment: *"This section describes a secondary (supplemental) water supply intake line for the City of Savannah to be constructed if needed. Based on a preliminary review, the Department would prefer intake Site 1, because intake Site 2 is likely to adversely affect more wetland and wildlife habitat. The Department requests further coordination to evaluate impacts and make recommendations if the supplemental intake site is needed in the future."*

Response: See previous response on this issue.

637-BB-141-EV74

Comment: *"The DEIS uses county population projection data to estimate the percent increase in impervious surfaces, but should probably also consider industrial development adjacent to the Savannah River, in part due to harbor expansion. For example, a large industrial warehousing complex is proposed adjacent to the Refuge that would involve paving several thousand acres of forest land. The storm water runoff associated with these surfaces is a key threat to the sustainability of adjacent wetlands, which this section should address in the final EIS."*

Response: Concur. Discussion concerning this proposed facility has been added to the Mitigation Planning Appendix.

637-BB-141-EV75

Comment: *"The table indicates that the Corps will provide funding to GADNR for the striped bass stocking program in late 2015 or early 2016. To offset project impacts that begin when construction is complete, GADNR must have stocking capacity in place in the first spawning season following construction. The Department recommends that the Corps transfer funding for the striped bass stocking program when dredging is initiated, which should provide enough lead time to develop stocking capacity."*

Response: The schedule has been revised to reflect that funding for Striped bass stocking would be made available to the Georgia DNR before dredging occurs in the inner harbor.

637-BB-141-EV76

Comment: *"There are inconsistencies of scope of work, roles, and required funding throughout. Strongly suggest a thorough update of Appendix D to bring this to current status and necessary funding. The GaWSC is ready to assist with this."*

Response: Appendix D has been revised to correct inconsistencies of scope of work, roles and required funding.

637-BB-141-EV77

Comment: *"The USGS Georgia Water Science Center (GaWSC) led the effort in 2006 to develop the Monitoring Plan for the proposed SHEP. This was created from feedback from a multi-agency team with a broad-based variety of expertise that has been involved with the SHEP planning over the years. Much has changed with the SHEP since this plan was first developed five years ago, and subsequently the monitoring plan needs updating. The GaWSC has installed a considerable amount of additional monitoring locations that were originally outlined in the 2006 monitoring plan since its release, and this needs to be properly documented. Additionally, the GaWSC, in collaboration with the multi-agency team, has over the last two years performed the installation and operation of a chloride monitoring network for the City of Savannah water intakes on Abercorn Creek, and more detail regarding the initial results of this work should also be factored into Appendix D. The GaWSC is ready to assist in updating the monitoring plan to reflect the latest scope, roles, and budgetary needs."*

Response: The Corps used the Hydrologic Monitoring Plan that the GaWSC developed with the other resource agencies for the Savannah estuary as the foundation for the hydrodynamic and WQ monitoring efforts. The Corps then modified that plan as needed to address issues specific to the harbor deepening project.

637-BB-141-EV78

Comment: *"Several new monitoring technologies have become available since the original plan was written in 2006. Real-time groundwater chloride monitoring should be considered as an early-warning system for the aquifers in case of damage to the confining layer. The GaWSC currently is performing similar monitoring in the Brunswick, Georgia area. Several existing USGS groundwater monitoring sites along the Savannah River channel could be upgraded to enable real time monitoring of chloride concentrations. With the deployment of index-velocity stream gages currently in place, there are also techniques now available to estimate the sediment load flux within the Savannah Harbor and surrounding estuary using a sediment surrogate approach. These techniques were developed by the GaWSC and can be beneficial in providing insight into the environmental impacts caused by transported sediments as well as provide operational benefits to the management of the channel and port. It is anticipated that because a considerable amount of the proposed monitoring is already in place, a*

significant cost savings could be found to help offset the implementation of these new monitoring technologies to make a more robust monitoring effort for the SHEP."

Response: Based on studies conducted during SHEP together with previous monitoring of groundwater wells, real-time groundwater monitoring is not warranted. The proposed monitoring program includes four groundwater monitoring well pairs to establish a before-project baseline and monitor post-project chloride levels in the upper Floridian aquifer. These wells would be monitored annually. Because of the slow rate of movement of water in the aquifer, that program would provide a sufficient warning system for potential unexpected impacts. Further, the District does not believe that use of new technology to monitor sediment load fluxes is warranted to address potential impacts from this project.

Page 14

637-BB-141-EV79

Comment: *"Finally, with a large share of the monitoring data now being available in real-time, the ability to visualize and alert water resource managers and stakeholders of the real-time conditions in the Savannah River Estuary are presently available. The USGS real-time webpage, NWISWeb, currently displays all data being collected in the SHEP at http://waterdata.usgs.gov/ga/nwis/current/?type=flow&group_key=basin_cd. The USGS has developed a real-time alerting system can be activated to electronically notify individuals when parameter(s) have exceeded a pre-defined threshold (for example, see <http://water.usgs.gov/wateralert/>). A crucial part of any monitoring plan should now include the ability to disseminate the information using visualization and information delivery tools in order to keep stakeholders informed and allow water managers to make informed decisions in a real-time manner."*

Response: The Monitoring and Adaptive Management Plan [page 10] identifies the USGS SC Water Science Center as a likely organization to conduct the continuous water quality monitoring. Seven new continuous recording water quality stations will be installed by this project. The USGS collects this data at 15-minute interval and can make the continuous real-time data available to resource managers and the general public through the USGS National Water Information System Web (NWIS Web). A program similar to that would provide sufficient real-time water quality monitoring data for the Savannah Harbor estuary.

637-BB-141-EV80

Comment: *"It is stated that if a mitigation feature is changed, monitoring will continue for an additional year. This period may be too short depending on the feature that was changed, when the change was made, and the hydrologic condition for the additional year. The ecosystem has a much different response during wet and dry years."*

Response: The text has been revised to indicate that monitoring would be conducted during the period of construction of an adaptive management feature and for two years thereafter if a mitigation feature is modified.

637-BB-141-EV81

Comment: *"The length of the sampling period of "one lunar cycle" is not clear. Is it a 25-hour period, 14-, or 28-day cycle? With what has been learned about the dynamics of the system and data collection, is this the most cost-effective period to collect data for evaluating the ecosystem and the performance of the models?"*

Response: The Hydrologic Monitoring portion of the Monitoring and Adaptive Management Plan has been updated to clarify that this intense monitoring would be performed over a 28-day period.

637-BB-141-EV82

Comment: *"The section on physical monitoring indicates that the project would fund USGS to collect pre-construction hydrologic data for "up to one year," but all references to pre-construction monitoring on page 8 are to "one year." The Department recommends 1 year of pre-construction monitoring."*

Response: Concur. Pre-construction monitoring to establish a baseline will have a one year duration.

637-BB-141-EV83

Comment: *"There are two existing water quality stations on Back River (021989784 and 021989791), and one on Front River (02198920), that have long-term salinity data. The Department recommends using this long-term salinity data set, from the end of the last harbor deepening construction to the start of any new deepening construction, as baseline salinity conditions for these sites and to supplement the 1 year of pre-construction water quality monitoring."*

Response: Concur. The District will consider all existing data when it compiles the pre-construction monitoring information.

Page 15

637-BB-141-EV84, 637-BB-141-EV85, 637-BB-141-EV86

Comment: *"Pre-construction monitoring for 1 year is intended to create or supplement a pre-project baseline. However, information based on only 1 year of data may not provide an adequate baseline. Using existing longer-term data from water quality stations on Back River and Front River should help address this problem (see previous comment on Appendix D, section 5.C, page 8 and Figure 3). Similarly, wetland and fishery studies performed during project planning represent useful baseline information. This section and others in the final EIS should describe in greater detail developing baseline conditions for the various monitoring parameters. In addition, this section states: "Monitoring would be conducted between the time a decision is made on implementing a harbor expansion and the time the construction*

begins which would affect aquatic resources in the inner harbor." If construction is delayed for more than 1 year after a decision for harbor expansion, the Department recommends continuing pre-construction monitoring until construction begins."

Response: Concur. See previous response.

As previously stated, the District will use all available data in determining the pre-construction baseline.

One year of monitoring would be performed before dredging starts in the inner harbor (pre-construction monitoring).

637-BB-141-EV87

Comment: *"The proposed water-quality parameters are not described. To be more complete, the full contingent of parameters available for continuous monitoring should be listing, which are: water temperature, specific conductance, pH, dissolved oxygen, and turbidity. Each parameter brings a specific scientific benefit to the monitoring plan, as well as complements each other with diagnostic troubleshooting of equipment failure."*

Response: Concur. The list of water quality parameters which will be monitored has been added to the Monitoring and Adaptive Management Plan [page 8].

637-BB-141-EV88

Comment: *"This figure needs to be updated to reflect current (2011) real-time network."*

Response: Figure 3 [page 9] of the Monitoring and Adaptive Management Plan has been replaced to reflect the 2011 real-time network.

637-BB-141-EV89, 637-BB-141-EV90

Comment: *"The USGS Georgia Water Science Center currently performs all of the monitoring in the SHEP. The funding figures are 5-years old and need to be revisited."*

Response: Savannah District will be responsible for performing all monitoring for the proposed harbor deepening project. The Corps plans to use multiple organizations to perform the various types of monitoring that would be conducted. It expects to seek assistance of the GaWSC for some aspects of the work -- the continuous water quality monitors.

The District will review the cost figures for the continuous water quality monitoring and revise as appropriate.

637-BB-141-EV91

Comment: *"The goals of the Intense Monitoring are not clear. "This sampling would address those constituents that...cannot be monitored by continuous recorders." The parameters and constituents*

listed; river discharge, flow volumes, flow velocity, flow direction, water surface elevation, depth, salinity, dissolved oxygen, water temperature, turbidity, pH, and specific conductance, can be monitored continuously. The remaining constituents are a short list: suspended solids, 5-day biochemical oxygen demand (BOD), and chlorides. Other parameters, constituents, and rates to consider are nutrients, long-term BOD, nitrification rates, sediment oxygen demand rate, re-aeration rates and tidal marsh dissolved-oxygen production/depletion rates."

Response: The District has revised the EIS to clarify the goals of the intense water quality monitoring program.

637-BB-141-EV92

Comment: *"Based upon the results of the initial chloride monitoring performed by the GaWSC, the Department recommends that SHEP chloride monitoring include a real-time index velocity streamgage at Bear Creek, and full chloride monitoring stations at Abercorn Creek (near the intakes) and on the Savannah River at I-95. Much of the monitoring infrastructure is already in place at the last two stations. The Bear Creek streamgage and some of the water-quality instrumentation would need to be reinstalled."*

Response: The District will consider a real-time index velocity stream gage at Bear Creek and full chloride monitoring stations at Abercorn Creek and on the Savannah River at I-95.

637-BB-141-EV93

Comment: *"The Georgia Fish and Wildlife Cooperative Research Unit, not the South Carolina Fish and Wildlife Cooperative Research Unit, have the fisheries personnel available to monitor the movement of fish."*

Response: The District would decide which organization would conduct the Shortnose sturgeon distribution studies during development of the SOW for that effort. The work would only be performed by a qualified agency or contractor.

Page 16

637-BB-141-EV94

Comment: *"In the Cost Summary, Oversight and Contracting are listed under "Biological" but not under "Geomorphic." Should there be a similar item under "Geomorphic"?"*

Response: The District reviewed its cost estimates and believes that the EIS identifies the funding needed to carry out the work.

637-BB-141-EV95, 637-BB-141-EV96

Comment: *"On a regular basis, the Corps would assess how well the ... models predict..." What is the frequency of this assessment? Every 4 months? Were other locations for sampling chlorides concentrations considered, such as the mouth of Abercorn Creek and I-95?"*

Response: An assessment of the model's performance would be performed every four months by comparing its predictions to actual measurements taken by the continuous water quality meters. [see: Monitoring and Adaptive Management Plan, page 17]

The District considered numerous potential water quality monitoring locations. It believes that the stations identified in the Monitoring Plan will allow adequate identification of potential project impacts and assessment the performance of the mitigation plan.

637-BB-141-EV97

Comment: *"Were other locations for sampling chlorides concentrations considered, such as the mouth of Abercorn Creek and I-95?"*

Response: See previous response.

637-BB-141-EV98

Comment: *"What is the reporting interval between the end of the 4-month data- collection periods and the release of the model evaluation reports?"*

Response: The hydrodynamic and water quality model assessments would be conducted every four months. It is reasonable to assume that a brief technical report summarizing the work and results could be prepared within 60 days.

637-BB-138-EV99

Comment: *"In the Cost Summary, Oversight and Contracting are listed under "Biological" but not under "Geomorphic." Should there be a similar item under "Geomorphic"?"*

Response: See previous response to this question.

637-BB-141-EV100

Comment: *"Are there details for the Transfer Efficiency Study of the dissolved-oxygen system? The data collection for the demonstration project was inadequate to show any conclusive effect of the injection system on the receiving waters."*

Response: The overall objective of the Transfer Efficiency Study [Monitoring and Adaptive Management Plan -page 20] would be to determine the efficiency by which the selected injection systems add oxygen to the water column. Once there is a quantitative determination of oxygen availability, a comparison can be made as to how this amount relates to that needed to mitigate project related impacts. A scope of work has not yet been developed.

637-BB-141-EV101

Comment: *"The Corps commits to biological monitoring when soil cadmium concentration is greater than or equal to 4 ppm, but does not define biological monitoring. The Department understood the Corps had agreed to tissue cadmium sampling independent of soil cadmium sampling. Tissue sampling should occur: 1) prior to sediment placement to collect baseline data; 2) during sediment placement; and 3) post placement until 3 consecutive years of samples contain cadmium concentrations that are less than the potential adverse effect level, which is to be determined."*

Response: See previous response to this question.

637-BB-141-EV102

Comment: *"The Department accepts the Corps' use of 4 ppm cadmium concentration in capping material as a trigger for remedial action in DMCA's. The Department understands that the Corps will move a DMCA to higher priority in the rotation for O&M sediment placement and vegetation monitoring if 25 cumulative acres are found to have a cadmium concentration greater than or equal to 4 ppm. Sampling and placement will continue until the DMCA has less than 25 cumulative acres with a cadmium concentration greater than or equal to 4 ppm."*

Response: See previous response to this question.

637-BB-141-EV103, 637-BB-141-EV104

Comment: *"This section states that the Corps will sample the top 15 cm of the cap material. The Department recommends sampling the top 30 cm of the cap material. This section also states that the Corps will conduct biological monitoring when soil cadmium concentrations exceed 4 ppm if the area "cannot be covered by O&M sediments within 6 months." This approach would risk a failure to conduct biological monitoring in an area that the Corps intends to cover within 6 months, but for whatever reason, may not. The Department recommends biological monitoring when concentrations exceed 4 ppm without regard to when the Corps intends to cover the area with O&M sediments."*

Response: See previous response to this question.

Page 17

637-BB-141-EV105

Comment: *"The Department requests that the Corps continue to coordinate with the FWS prior to completion of the final EIS to finalize plans for biological monitoring within DMCA's, including tissue sampling."*

Response: The Corps has coordinated with the USFWS concerning this issue during development of the FEIS.

637-BB-141-EV106

Comment: *"No monitoring is proposed for striped bass, but should be. We recommend a post-project assessment of striped bass habitat using the water quality monitoring data and updated water quality simulations. Model updates are already planned that would facilitate a low-cost assessment using the established striped bass habitat criteria. The Department recommends comparing conditions during the fourth year of post-project monitoring with pre-construction predicted habitat impacts, and formulating corrective actions as necessary based on the results."*

Response: Concur. The District agrees that a post-project assessment of Striped bass habitat impacts using the most recent water quality monitoring data and updated water simulations would be appropriate. This would be conducted during the fourth year of the post-construction monitoring. Appropriate sections of the document including the Monitoring and Adaptive Management Plan have been revised to indicate the inclusion of this work.

637-BB-141-EV107

Comment: *"The Department supports the sampling protocol (species and timing) described in this section, with one exception (or clarification). Sampling when the CDFs are wet is proposed for April and September. However, the next sentence says three individuals of two species (six total) "will be collected each year" (emphasis added). We recommend revising this to state that these six individuals will be collected twice a year (April and September) when the CDFs are wet."*

Response: Concur. The Monitoring and Adaptive Management Plan [page 23] has been revised to indicate that six individuals will be collected twice a year (April and September) when the CDFs are wet.

637-BB-138-EV108

Comment: *"The DEIS shows various post construction monitoring ranging from 2 to 5 years. It is not unlikely that a drought or high-flow period lasting several years would occur during the post-construction monitoring period, which would complicate comparisons with pre-construction monitoring data. In addition, tidal freshwater wetlands respond slowly to salinity change. Therefore, the Department recommends increasing wetland and continuous water quality monitoring from 5 years post-construction to 10 years."*

Response: The District believes that five years of post-construction monitoring is sufficient to capture a range of flows over which to identify the project's impacts and evaluate the performance of the mitigation features.

637-BB-141-EV109, 637-BB-141-EV110

Comment: *"We recommend developing a detailed data analysis plan for the post-construction water quality monitoring. The mitigation features will significantly alter the system, which will complicate the comparisons of pre- and post-construction conditions to determine the efficacy of the mitigation measures. A recent example of the need for such a plan was the re-oxygenation demonstration*

performed for the Savannah Harbor Expansion project. Monitoring data was collected, but the analysis of that data failed to conclusively quantify the effect of the demonstration project in the highly variable DO dynamics of the system."

Response: A detailed data analysis plan is not warranted in a feasibility study. That more detailed work would typically be performed after decisions are made to implement a project. The District believes the level of detail in the EIS describing the monitoring that would be performed is sufficient.

The initial reports of that limited demonstration project were supplemented and revised by GPA's contractors and the revised reports containing additional information quantifying the effects on D.O. were provided to the natural resource agencies.

637-BB-141-EV111, 637-BB-141-EV112

Comment: *"Concerning the revegetation of Area 1S, grading the site and its feeder creeks to the proper elevations is essential to avoid establishing invasive vegetation (e.g., Chinese tallow tree) that have little or no wildlife value. The discussion and table in this section should specify criteria for successful establishment of native wetland plants. Monitoring the success of the re-vegetation for 5 years should include control measures for exotic and invasive species, if detected."*

Response: The table on page 29 of the Monitoring and Adaptive Management Plan specifies the criteria which will be used to determine if wetland growth in Disposal Site 1S is occurring at an acceptable rate. The plan has been revised to include monitoring for invasive species [especially common reed and Chinese tallow tree] together with measures to control such species should they prove to be a problem.

637-BB-141-EV113, 637-BB-141-EV115

Comment: *"This section describes an informal inter-agency review process for monitoring data and reports during the 5-year post-construction monitoring period. Within 1 year after the 5-year post-construction monitoring period, the Corps would prepare a consolidated report of the various monitoring programs, followed by 30 days of agency review, an unspecified time period for further report revision, public review, and a potential elevation process. This time-line for making decisions on adaptive management actions would likely require a minimum of 1.5 years after the 5-year post-construction monitoring period, and could take much longer. The Department recommends compressing this process so that final decisions on corrective actions are reached within 1 year after the monitoring period. In addition, because we have recommended extending the duration of post-construction monitoring from 5 years to 10 years, we also recommend preparing and reviewing a consolidated report of the various monitoring programs at the end of 5 years, and again at the end of 10 years following project construction, to ensure that adaptive management decisions can be made when it becomes apparent that a problem exists, and in a timely manner."*

Response: The District believes the timelines discussed in the Monitoring and Adaptive Management Plan [page 30] regarding data compilation, draft report preparation, and agency/public review are reasonable.

As stated in previous responses, the District believes that five years of post-construction monitoring is sufficient. It should be stressed that the opportunity for Cooperating Agencies to make recommendations about changes in project and/or mitigation measures will not be limited to the immediate period after completion of the post-construction monitoring. The Monitoring and Adaptive Management Plan includes a meeting between the District and the natural resource agencies at the end of each monitoring year to discuss any changes to the monitoring requirements, the project, or the mitigation features. This type of meeting could be held on a more frequent basis if circumstances require.

Page 18

637-BB-141-EV114

Comment: "Appendix D contains two sections "9.B" – the second one should be "9.C." "

Response: Concur. Correction has been made.

637-BB-138-EV116

Comment: "The Federal modeling performance goals in the plan are those provided by review agencies in 2001 during hydrodynamic model development. Because the agencies were aware of the complexity of the system and model limitations, we allowed considerable latitude in the performance of the models. We are concerned that adopting the same tolerances for the performance of the constructed project is inappropriate, because actual impacts could differ substantially from the predicted impacts without triggering remedial action. Based on earlier coordination, the Corps modified the tolerances for achieving a goal of <1 ppt salinity to +/- 0.1 ppt, and we support this change. The goal for salinity in the range of 1-5 ppt has not been modified, and would allow considerable impact without triggering action. As proposed, a range of 0.5 to 1.5 ppt is acceptable for a salinity goal of 1 ppt (+/- 50%), while a range of 0.89 to 1.09 ppt is acceptable for a salinity goal of 0.99 ppt (+/- 10%). We recommend modifying the goal for salinity in the range 1-5 ppt to +/- 10 % (not +/- 0.5 ppt as currently stated) to make it more consistent with other goals and triggers for adaptive management."

Response: The District revised Appendix D to include the suggested goal for salinity predictions (+/- 10% in the 1-5 ppt range). While this goal may not be achievable, modelers would strive to reach this objective.

637-BB-141-EV117

Comment: "This section states that the "Corps would seek and obtain its funds for this phase each year through the normal budget process," which concerns the Department. It is relatively certain that impacts to trust resources of the Department will occur following construction, but the effectiveness of the mitigation features is much less certain. Therefore, the Department cannot agree that the proposed

mitigation plan adequately addresses project impacts unless contingency funding for monitoring/adaptive management activities is assured."

Response: See previous response to this question.

637-88-141-EV118

Comment: *"This section should also discuss an implementation schedule for needed corrective actions. The Department recommends initiating construction, or other appropriate remedial actions, within 1 year of a decision to modify a mitigation feature."*

Response: The District concurs with the goal of initiating construction within one year of a decision to implement an adaptive management feature. However, it a one-year time limitation on implementing a remedial action may not be achievable in all circumstances. If the action were identified in the EIS and contingency funds available, a one-year duration would be reasonable. However, if the remedial action was outside the identified scope of the EIS, additional NEPA documentation [and time] would be required. Significant modifications to the project or its mitigation features could exceed available funding, requiring a request for additional money. Those steps could easily take more than one year to complete.

637-88-141-EV119

Comment: *"The Corps proposes to monitor the performance of corrective actions under the adaptive management program. It is unlikely that 1 year of post-construction monitoring is sufficient to determine the outcome of the action in a system as dynamic as the Savannah estuary. The Department recommends 3 years of post-construction monitoring of adaptive management actions."*

Response: This section has been revised to provide for two years of monitoring after implementation of an adaptive management feature.

637-88-141-EV120

Comment: *"The Corps proposes to fund four water monitoring stations to determine whether the mitigation features are functioning as intended. A fifth station, Station 021989784, is located at the intake of the freshwater supply system for the 3,000 acres of managed wetlands on Savannah NWR and is therefore especially important for monitoring project impacts to the Refuge. The Department recommends adding it to the Corps' list of supported stations."*

Response: The continuous water quality monitoring station at the intake to the Savannah National Wildlife Refuge is already funded by the Georgia Ports Authority.

Page 19

637-88-141-EV121

Comment: *"This appendix does not include a section header to separate Section B, Tidal Freshwater Marsh, from Section A, Savannah NWR Freshwater Waterfowl Management Operations. We believe page 16 is the appropriate location for this."*

Response: Concur. The District has revised the EIS as suggested.

637-BB-141-EV122

Comment: *"Figure 5 and the associated text do not provide an accurate representation of marshes in 1854. Most of the salt marsh shown on Figure 5 is in the Wright River system, not the Savannah system. The demarcation between freshwater marsh, brackish marsh, and salt marsh is not supported by historical information. As stated on page 20, Appendix L, tidal forest in the mid-1700's extended to the junction of Back River and the Savannah River, and brackish marshes extended to near the mouth of the river. Appendix Q, page 22, mentions that Hutchinson Island was used extensively for rice culture, which requires freshwater. Between the mid-1700's and mid-1800's, only minor modifications were made to the Savannah River. This information indicates that the depiction of marsh type extent in Figure 5 and the resulting areal estimates are mistaken, and that the freshwater limit extended to about river mile 7 in the mid-1850's. Figure 5 shows the interface at about river mile 19. The Department recommends correcting these errors."*

Response: Figure 5 was originally developed by EPA during its analyses for the dissolved oxygen TMDL for the harbor. The District included it in the EIS to show that different natural resource agencies have different understandings of the historic conditions in the estuary. Since man has made many changes in this estuary over time, some of the differences are the result of analyzing conditions at different points in time.

637-BB-141-EV123

Comment: *"Figure 6 and the associated text do not provide an accurate representation of marshes in 1999. USGS estimates based on detailed field studies and Corps estimates based on the hydrodynamic model are generally consistent, but are substantially different from the estimates shown in Figure 6. The Department recommends corrections for clarity."*

Response: Figure 6 was originally developed by EPA during its analyses for the dissolved oxygen TMDL for the harbor. The District included it in the EIS to show that different natural resource agencies have different understandings of the historic conditions in the estuary. Since man has made many changes in this estuary over time, some of the differences are the result of analyzing conditions at different points in time.

637-BB-141-EV124

Comment: *"This section states that the primary stress to tidal freshwater marsh is prolonged drought, which is not supported by evidence. In 1875, when the controlling depth of the navigation channel was 12-15 feet, the Savannah estuary supported an estimated 12,000 acres of tidal freshwater marsh. In 2005, when the controlling depth was 42 feet, the estuary supported only 3,269 or 4,072 acres*

(depending on study method used). This section should instead state that the inland intrusion of salt water resulting from channel deepening is a constant stress on tidal freshwater marsh, and that prolonged drought exacerbates this stress."

Response: The Present and Future Stresses Sections of this discussion have been revised to indicate that salinity levels are and will continue to be a stress on tidal freshwater marsh.

637-BB-141-EV125

Comment: *"This section also states that the Corps evaluated the effects of sea level rise on tidal freshwater marsh. The Department maintains that sea level rise would have a negligible impact within the Savannah NWR if not for the cumulative impact of previous harbor deepening."*

Response: This section has been revised to show the relationship between sea level rise/past harbor deepening projects and their cumulative adverse effect on tidal freshwater wetlands.

637-BB-141-EV126

Comment: *"The discussion of the mitigation for the loss of non-freshwater tidal marshes is confusing. Previous sections – Appendix C, Section V, and elsewhere – speak of impacts to 14.08 acres of salt and brackish marsh with 42 (or 45) acres listed as mitigation for the 44-foot alternative. Appendix C lists 15.68 acres of brackish marsh loss for all the proposed harbor deepening alternatives. This Appendix lists the loss of 3.0 acres of brackish marsh and 12.68 acres of saltmarsh, which equals the 15.68 acres of brackish marsh mentioned in Appendix C. This is confusing because both 14.08 acres and 15.68 acres are listed as marsh loss for either the 44-foot alternative or all alternatives. Also, the acreage proposed for restoration is not clear. The Department recommends revisions for clarity."*

Response: Appropriate sections of the document have been revised to indicate that the amount of direct marsh loss associated with harbor deepening is 15.68 acres. Revisions to the text were also made to describe the marsh restoration feature at Disposal Site 1-S, viz., a roughly 42-acre portion would be topographically sculpted to create a suitable marsh habitat. This parcel also includes a 1.7-acre area previously graded down by the Georgia Ports Authority for similar mitigation purposes. Of the 42-acre total, only 25.8 acres would be necessary to mitigate for the subject harbor deepening. The remaining roughly 16 acres would serve as mitigation for future impacts from O&M of the Savannah Harbor Navigation Project.

Page 20

637-BB-141-EV127

Comment: *"Most of the salt marsh in the estimate provided in the "Present Condition" section is in the Wright River system, and not in the Savannah River system. The Department recommends corrections for clarity."*

Response: The information included in the EIS was originally developed by EPA during its analyses for the dissolved oxygen TMDL for the harbor. The District included it in the EIS to show that different natural resource agencies have different understandings of the historic conditions in the estuary. Since man has made many changes in this estuary over time, some of the differences are the result of analyzing conditions at different points in time.

637-BB-141-EV128

Comment: *"The Department recommends taking samples of the cap material to a depth of 30 cm instead of the 15 cm depth proposed. This section also cites 7 ppm cadmium concentration as the trigger for remedial action: we recommend this section be revised to be consistent with Appendix D (Section 7.B) which identifies 4 ppm as the trigger."*

Response: See previous responses to this question.

637-BB-141-EV129

Comment: *"We recommend biological monitoring when cadmium exceeds 4 ppm regardless whether the Corps plans to cover the area with O&M sediments within 6 months. This section, and others, should define biological monitoring in the context of cadmium in disposal areas. The Department recommends a program of monitoring wildlife activity in disposal areas and cadmium levels in bird tissues that is independent of the Dredge Material Containment Area (DMCA) capping criteria. Wildlife monitoring should begin with sediment placement and continue as long as all other monitoring of the DMCA. Tissue monitoring should occur: 1) prior to sediment placement to collect baseline data; 2) during sediment placement; and 3) post placement until 3 consecutive years of samples contain cadmium concentrations that are less than the potential adverse effect level, which is to be determined. The Department supports the sampling protocol (species and timing) described in Appendix D, page 23, and requests that the Corps continue to coordinate with the FWS prior to completion of the final EIS to finalize plans for biological monitoring within DMCA's, including tissue sampling."*

Response: There are two basic components of the monitoring plan in regard to the disposal of cadmium-laden sediments in the CDFs. The first involves sampling of the initial cover/cap material to be placed over the cadmium sediments. This material would be other new work sediments that contain lower cadmium levels. After this cover has been placed, sediment samples would be collected and analyzed. If cadmium levels in the cover are equal to or exceed 4 mg/kg in a cumulative area of 25 acres or greater, an additional cover of maintenance dredging sediments would be applied. If the concentration of cadmium in these samples is below 4 mg/kg, no further action would be required. If the samples exceed 4 mg/kg, then an additional cap of O&M material would be placed over the sediments and additional soil sampling conducted. This process would be repeated until cadmium concentrations in sediments in the CDF cover are 4 mg/kg or less.

637-BB-141-EV130

Comment: *"Our recommendations necessitate revisions to the "Decision Matrix for Cadmium Sampling" on page 86, including: remove references to 7 ppm cadmium concentrations; remove "if necessary" in*

reference to tissue sampling; do not differentiate between areas slated for covering before or after 6 months; and continue wildlife use studies until tissue monitoring is completed."

Response: The Decision Matrix will be revised as suggested.

637-BB-136-EV131

Comment: *"Based on an analysis prepared by Kinetic Analysis Corporation (KAC), this section concludes that the hydrodynamic model probably over-predicts salinity and under-predicts dissolved oxygen, i.e., the model errs towards the side of simulating conditions worse than would actually occur. We believe this analysis may seriously misrepresent the risk and uncertainty associated with the water quality predictions. With the exception of the new channel depth, the KAC analysis relied upon the existing geometry of the Savannah River estuary. Several mitigation measures would significantly modify the system geometry, including significant flow diversion at McCoys Cut, closing Rifle Cut, filling the Back River sediment basin, and removing the tide gate. Flow routing and flow volume in the three main river channels would become significantly different from the current system. Therefore, we believe the degree of risk and uncertainty regarding expected water quality impacts, and the resulting wetland impacts, is considerably higher than the KAC analysis suggests, which is one of the reasons why the Department recommends extending the proposed post-construction monitoring from 5 years to 10 years."*

Response: See previous responses to this question.

Page 21

637-BB-141-EV132

Comment: *"This portion of the DEIS discusses risk and uncertainty in relation to sea level rise and the modeling of impacts to freshwater marsh. This section argues for predicating mitigation on the "base year" impacts (the year construction is complete) instead of average annual impacts over the life of the project (consistent with Corps policy), because "impacts that would occur soon after the base year are those most likely to occur and least subject to uncertainty from more distant projections of future conditions." Average annual impacts are less than base year impacts because sea level rise over 50 years will cause wetland losses without the project. The Department agrees with predicating mitigation on the base year impacts, but for a different reason. The Department maintains that sea level rise would have a negligible impact on Savannah NWR if not for the cumulative impact of previous harbor deepening,"*

Response: The USDI's comments concerning the effects of past harbor deepening on sea level rise and the SNWR are acknowledged.

637-BB-141-EV133, 637-BB-141-EV134

Comment: *"Wetland impacts are inferred from salinity changes predicted by the hydrodynamic model. This section states: "...the hydrodynamic model has roughly an 80 percent chance of over-predicting salinity levels at low salinity levels, thus leading to an over-prediction of salinity-induced impacts to*

wetlands. Therefore, the model is considered to present little risk for decision-makers evaluating salinity impacts to wetlands.” The Department disagrees with this characterization, which was based on analysis by KAC that, with the exception of the new channel depth, relied upon the existing geometry of the Savannah River estuary. Several mitigation measures would significantly modify the system geometry, including significant flow diversion at McCays Cut, closing Rifle Cut, filling the Back River sediment basin, and removing the tide gate. Flow routing and flow volume in the three main river channels would become significantly different from the current system. Therefore, we believe the degree of risk and uncertainty regarding expected water quality impacts is considerably higher than the KAC analysis suggests, and is a reason we recommend extending the proposed post-construction monitoring from 5 years to 10 years.”

Response: The District acknowledges the USDI’s disagreement with the basic conclusion in the Risk and Uncertainty Analysis [page 8] that states “the hydrodynamic model has roughly an 80 percent chance of over-predicting salinity levels at low salinity levels, thus leading to an over-prediction of salinity-induced impacts to wetlands. Therefore, the model is considered to present little risk for decision- makers evaluating salinity impacts to wetlands”. The Risk and Uncertainty Analysis was performed by an independent contractor. The USFWS reviewed those findings before it agreed that the model was sufficient for impact evaluation purposes on this project. The post-construction monitoring plan is designed to provide data to refine and improve the accuracy of the hydrodynamic and water quality models.

See previous responses to this question

637-BB-141-EV136, 637-BB-141-EV135

Comment: “This section states that the model slightly under-predicts DO levels and is therefore a good predictor of DO-related impacts. Because the project and the various mitigation features will substantially alter channel geometry of the lower river, and the hydrodynamic models are based on the current geometry, the Department attributes a relatively high degree of uncertainty with the model predictions of water quality impacts, including DO impacts. We recommend that the final EIS recognize and acknowledge this uncertainty. The risk to fish and other resources of underestimating DO impacts is further justification for expanding the monitoring effort beyond the currently proposed 5 years to 10 years.”

Response: The risks and uncertainties of the proposed dissolved oxygen system for Savannah Harbor are fully discussed in the Risk and Uncertainty Analysis [page 9-11]. The post-construction monitoring plan is designed to provide data to refine and improve the accuracy of the hydrodynamic and water quality models, and quantify impacts from a harbor deepening.

Please see previous responses concerning extending the five-year post-construction monitoring plan to ten-years.

637-BB-141-EV137

Comment: *The Draft EIS references a USGS report, by the Cooperative Research Unit, titled "Simulation of Water Levels and Salinity in the Rivers and Tidal Marshes in the Vicinity of the Savannah National Wildlife Refuge, Coastal South Carolina and Georgia" but does not provide the reference. Suggest the Final EIS include the reference (Conrads et al, 2006) as follows:*

Conrads PA, Roehl EA, Daamen RC, and Kitchens WM. 2006. Simulation of Water Levels and Salinity in the Rivers and Tidal Marshes in the Vicinity of the Savannah National Wildlife Refuge, Coastal South Carolina and Georgia. US Geological Survey, Scientific Investigations Report 2006-5187, 134 p. Available online at:

<http://pubs.usgs.gov/sir/2006/5187/pdf/sir20065187.pdf>

Response: Concur. This reference has been added to the references section.

Page 21

637-BB-141-EV138

Comment: *"Based on an analysis prepared by Kinetic Analysis Corporation (KAC), this section concludes that the hydrodynamic model probably over-predicts salinity and under-predicts dissolved oxygen, i.e., the model errs towards the side of simulating conditions worse than would actually occur. We believe this analysis may seriously misrepresent the risk and uncertainty associated with the water quality predictions. With the exception of the new channel depth, the KAC analysis relied upon the existing geometry of the Savannah River estuary. Several mitigation measures would significantly modify the system geometry, including significant flow diversion at McCoys Cut, closing Rifle Cut, filling the Back River sediment basin, and removing the tide gate. Flow routing and flow volume in the three main river channels would become significantly different from the current system. Therefore, we believe the degree of risk and uncertainty regarding expected water quality impacts is considerably higher than the KAC analysis suggests, and is a reason we recommend extending the proposed post-construction monitoring from 5 years to 10 years."*

Response: Please see previous responses on this concern.

637-BB-141-EV139

Comment: *"This section states that the model slightly under-predicts DO levels and is therefore a good predictor of DO-related impacts. Because the project and the various mitigation features will substantially alter channel geometry of the lower river, and the hydrodynamic models are based on the current geometry, the Department attributes a relatively high degree of uncertainty with the model predictions of water quality impacts, including DO impacts. We recommend that the final EIS recognize and acknowledge this uncertainty. The risk to fish and other resources of underestimating DO impacts is further justification for expanding the monitoring effort beyond the currently proposed 5 years to 10 years."*

Response: Please see previous responses on this concern.



REPLY TO
ATTENTION OF:

DEPARTMENT OF THE ARMY
SAVANNAH DISTRICT, CORPS OF ENGINEERS
100 W. OGLETHORPE AVENUE
SAVANNAH, GEORGIA 31401-3640

JAN 24 2011

Executive Office

Ms. Carolyn Boltin-Kelly
Deputy Commissioner
Office of Ocean and Coastal Resource Management
South Carolina Department of Health and Environmental Control
1362 McMillian Avenue, Suite 400
Charleston, South Carolina 29405

Dear Ms. Boltin-Kelly:

In your letter, dated January 21, 2011, you inquired as to whether the time allowed under the Clean Water Act for water quality certification review also applies to your office's review for consistency with the South Carolina Coastal Zone Management Program. If it does not, you requested an extension of the National Environmental Policy Act (NEPA) public comment period that ends on January 25, 2011.

The Coastal Zone Management Act (CZMA) (16 U.S.C. 1451 et seq) is the Federal statute that governs Federal activities that affect land, water, or natural resource uses within the coastal zone. The CZMA requires that we provide a consistency determination to affected states at the earliest practicable time. Consistent with this requirement we provided SC DHEC with our consistency determination for the SHEP project through the November 15, 2010, Joint Public Notice (JPN) for the Savannah Harbor Expansion Project (SHEP).

Under the Corps coastal zone consistency regulations (33 C.F.R. 336.1 et seq), if SC DHEC requested an extension of time within 45 days, then I am required to approve one 15-day extension. On December 3, 2010, Mr. Earl Hunter (Commissioner, SC DHEC) did ask for additional time for coastal zone consistency review. Accordingly, 60 days for SC DHEC's coastal zone management review would have ended on January 14, 2011. However, I extended the NEPA public comment period and agreed to accept all comments until January 25, 2011.

Based on the information we provided in support of our coastal zone consistency determination, and the facts of this situation, no further time will be provided. I look forward to receiving your comments and appreciate and look forward to our continued collaboration on this project.

A copy of this letter will be furnished to Mr. Earl Hunter, Commissioner, SC Department of Health and Environmental Control, 2600 Bull Street, Columbia, South Carolina 29201 and Mr. David Wilson, Bureau of Water Chief, SC Department of Health and Environmental Control, 2600 Bull Street, Columbia, South Carolina 29201

Sincerely,



Jeffrey M. Hall
Colonel, US Army
Commanding



C. Earl Hunter, Commissioner

Promoting and protecting the health of the public and the environment

January 25, 2011

Colonel Jeffrey M. Hall, District Commander
U.S. Army Corps of Engineers, Savannah District
P.O. Box 889
Savannah, Georgia 31402-0889

Re: Savannah Harbor Expansion Project: Draft General Re-Evaluation Report and Draft Tier II Environmental Impact Statement

Dear Colonel Hall:

The South Carolina Department of Health and Environmental Control- Office of Ocean and Coastal Resource Management (SCDHEC OCRM or DHEC or the Department) has made great efforts to review the Draft General Re-Evaluation Report (DGRR) and the Tier II Draft Environmental Impact Statement (DEIS) (collectively referred to herein as the Federal Agency Consistency Determination) for the Savannah Harbor Expansion Project within the time frame provided by your letter of January 24, 2011. However, the Department disagrees with your analysis of the timeframe that the Coastal Zone Management Act provides to the Department to provide comments.

The Department received notice of the federal agency's consistency determination on November 17, 2010.¹ 15 C.F.R. § 930.41(a) provides the State agency 60 days from receipt of the Federal agency's consistency determination and supporting information to inform the federal agency of the state agency's concurrence with or objection to the Federal agency's consistency determination. In addition, 15 C.F.R. § 930.41(b) provides that state agency concurrence shall not be presumed in cases where the State agency, within the 60-day period, requests an extension of time to review the matter. This regulation requires the Federal agency to approve one request for an extension period of fifteen days or less, if requested, and authorizes the Federal agency to approve a longer or additional extension period as appropriate. Additionally, this regulation requires that the Federal agency should consider the magnitude and complexity of the information contained in the consistency determination when considering whether a longer or an additional extension period is appropriate. DHEC OCRM requested additional time to evaluate the project on Dec. 3, 2010 and again on January 21, 2011. Because there is no discretion given to the Federal Agency to deny a first request for an additional fifteen days, the federal agency may not presume state concurrence until at least seventy-five days after the State agency's

¹ In your letter dated January 24, 2011, you indicate that you provided notice to the state agency on November 15, 2010. In fact, the Department received notice of the Corps' consistency determination on November 17, 2010. 15 C.F.R. § 930.41 provides the state agency "60 days from receipt of the Federal agency's consistency determination and supporting information" to provide notice to the Federal agency of the state agency's response.

Boltin-Kelly to Colonel Hall
SHEP

January 25, 2011

Page 2

receipt of notice of the federal agency's consistency determination.² Thus, DHEC has at least until January 31, 2011 to notify the Federal agency of its objection to the Federal agency's consistency determination.³ Additionally, given the magnitude and complexity of the information contained in the consistency determination, the Federal agency should grant an additional or longer period and the Department again requests that the Corps exercise its discretion and authorize the Department additional time to submit further comments on the federal agency's consistency determination. The Department believes that the 15 day extension is necessary to give the public and resource agencies the proper time to evaluate the project due to the "complexity and magnitude of the information" and the timeliness of the public notice during holiday season.

Reserving the Department's rights under the Act to submit additional comments objecting to the federal agency's consistency determination within the maximum amount of time provided under 15 C.F.R. § 930.41(b), the Department objects to the federal agency's consistency determination based on the following grounds.

As an initial matter, as the Federal Consistency Determination points out, the Coastal Zone Management Act, 16 U.S.C. §§ 1451, et. seq., requires that "Each federal agency activity within or outside the coastal zone that affects any land or water use or natural resource of the coastal zone shall be carried out in a manner which is consistent to the maximum extent practicable with the enforceable policies of approved state management programs." 16 U.S.C. § 1456(c)(1)(A). "Consistent to the maximum extent feasible" is defined in the Regulations promulgated by the Secretary of Commerce and means "fully consistent with the enforceable policies of management programs unless full consistency is prohibited by existing law applicable to the Federal Agency." 15 C.F.R. § 930.32(a)(1). The Regulations further provide that "if a Federal agency asserts that full consistency with the management program is prohibited, it shall clearly describe, in writing, to the State agency the statutory provisions, legislative history, or other legal authority which limits the Federal agency's discretion to be fully consistent with the enforceable policies of the management program." 15 C.F.R. 930.32(a)(2). Here, the Federal Agency has not identified in writing to the state agency any existing law which prohibits full consistency with South Carolina's approved management program. Therefore, because the federal agency has not identified to the state agency any existing laws which prohibit full consistency, the

² In your letter dated January 24, 2011, you rely on the "Corps [sic] coastal zone consistency regulations (33 C.F.R. 336.1, et. seq.)" which purport to provide a 45-day window for state agency review but also have the requirement that the Corps grant a 15-day extension if an extension is requested and which also provide the Corps with authority to grant additional or longer extensions. The Department sees no statutory authority in the Coastal Zone Management Act for the Corps of Engineers to promulgate regulations different from the regulations promulgated by the Secretary of Commerce to carry out the provisions of the Coastal Zone Management Act. The Congress specifically gave the Secretary of Commerce the authority to promulgate regulations necessary to carry out the provisions of this chapter. See 16 U.S.C. § 1463 and 16 U.S.C. § 1453(16) (defining "secretary" as the "Secretary of Commerce.") The Secretary of Commerce has promulgated these regulations under 15 C.F.R. Part 930. Therefore, though the Department is issuing this letter in accordance with the timeframe you set forth in your letter dated January 24, 2011, the Department reserves its full authority under 15 C.F.R. Part 930 et. seq., to use the full timeframe provided therein to comment on the federal agency's consistency determination.

³ Even using the November 15, 2010 date upon which the Corps asserts that the clock begins to run, the seventy fifth day falls on Saturday, January 29, 2011.

Boltin-Kelly to Colonel Hall
SHEP

January 25, 2011

Page 3

Coastal Zone Management Act's requirement that the federal agency activity be consistent to the maximum extent practicable requires that the Federal agency activity be fully consistent with South Carolina's approved management program.

Based on staff's evaluation of the DGRR, DEIS and the Savannah District Army Corp of Engineers Federal Consistency Determination, the SCDHEC OCRM does not concur that the five dredging alternatives are consistent with the South Carolina Coastal Management Program(SCCMP) . The following specific policies and responses will inform you how the proposed activity is inconsistent with the SCCMP:

Chapter III, Section C.I. Guidelines for Evaluation of All Projects:

- (1)(b) The extent to which the project will further the policies of the South Carolina General Assembly which are mandated for OCRM in implementation of its management program these being: (b) To protect and, where possible, to restore or enhance the resources of the State's coastal zone for this and succeeding generations. (Sections 48-39-30(B)(1) and (2), S.C. Coastal Management Act of 1977).

The project as proposed will not restore or enhance the resources of the state but will result in a degradation of coastal resources.

- (2) The extent to which the project will have adverse impacts on the "critical areas" (beach/dune system, coastal waters, tidelands).

The project as proposed will reduce dissolved oxygen, and depends on mechanical means in an attempt to maintain current levels. This causes a net loss of degraded fisheries habitat.

- (3) The extent to which the project will protect, maintain or improve water quality, particularly in coastal aquatic areas of special resource value, for example, spawning areas or productive oyster beds.

The proposed dredging to deepen the Savannah Harbor as set forth in the National Economic Development (NED) Plan, 47-foot Depth Alternative, and the Locally Preferred (LP) Plan, 48-foot Depth Alternative, will reduce the dissolved oxygen levels in the Savannah River from the existing state in an area utilized for spawning of important fisheries species including striped bass and shortnose sturgeon (SNS). Mitigation for this impact is to stock bass fingerlings provided by Georgia DNR and construction of a fishway for Shortnose Sturgeon at the New Savannah Bluff Lock & Dam at Augusta Georgia. Stocking of fingerlings does not eliminate impacts to spawning and nursery areas for the Striped Bass and the construction of a fishway does not assure the Shortnose Sturgeon will be able to use it. In the event low DO (Dissolved Oxygen) levels fall below current concentrations, as predicted in the DEIS, the lower part of the river may not be passable by adult or juvenile sturgeon. The shallower dredging alternatives are more desirable to both the NED and LP alternatives, however all dredging alternatives (with or without mitigation) result in a net loss of Striper and SNS habitat.

Boltin-Kelly to Colonel Hall

SHEP

January 25, 2011

Page 4

- (4) The extent to which the project will meet existing State and Federal Requirements for waste discharges, specifically point sources of air and water discharge, and for protection of inland wetlands.

Models described in the EIS indicate impacts to large areas of freshwater marshlands including important habitat for fish, wading birds, & waterfowl. While efforts have been addressed to minimize impacts, a minimum of 337 acres of freshwater marsh will be affected by salt waters. Mitigation for this impact is to preserve additional wetlands adjacent to the Savannah River National Wildlife Refuge. Preservation does not replace the lost values and functions of the impacted freshwater marsh.

- (7) The possible long-range, cumulative effects of the project, when reviewed in the context of other possible development and the general character of the area.

This project will result in a very large volume of spoils that will use significant areas within the existing spoils disposal sites, located mostly in Jasper County, resulting in shorter life expectancy of the CDF (Contained Disposal Facility). This may result in the need for additional wetland impacts for expansion of the CDF in Jasper County. Additional impacts from existing port expansions, storage, and transportation facilities associated with the port will likely result in additional impacts to wetlands and water quality. The proposed disposal of spoils in the CDF will potentially eliminate the possibility of a new port in Jasper County.

- (8) The extent and significance of negative impacts on Geographic Areas of Particular Concern (GAPCs). The determination of negative impacts will be made by OCRM in each case with reference to the priorities of use for the particular GAPC. Applications which would significantly impact a GAPC will not be approved or certified unless there are no feasible alternatives or an overriding public interest can be demonstrated, and any substantial environmental impact is minimized.

The proposed project will impact habitat for the federally endangered Shortnose Sturgeon. Endangered species habitat is considered GAPC in the SCCZMP. Mitigation offered to offset this impact is to construct a fishway at the New Savannah Bluff Lock & Dam. There is no certainty that the sturgeon will use this structure or that it will have any effect on spawning or survival of this species. Additionally, the project proposes a net loss of SNS habitat.

- (9) The extent and significance of impact on the following aspects of quality or quantity of these valuable coastal resources:

- (i) unique natural areas—destruction of endangered wildlife or vegetation or of significant marine species (as identified in the Living Marine Resources segment), degradation of existing water quality standards.

This project will have a significant impact on Striped Bass and Shortnose Sturgeon. Mitigation of these impacts is dependent on mechanical means (oxygen injection and release of fingerlings) that has not been adequately demonstrated to reduce or eliminate the impacts to water quality and fish survival.

Boltin-Kelly to Colonel Hall
SHEP

January 25, 2011

Page 5

Chapter III, Section C.H. In critical areas of the coastal zone, it is OCRM policy that, in determining whether a permit application is approved or denied, OCRM "shall base its determination on the individual merits of each application, the policies specified in Sections 48-39-20 and 48-39-30 (of the Act), and be guided by the following general considerations:

- (3) The extent to which the applicant's completed project would affect the production of fish, shrimp, oysters, crabs or clams or any marine life or wildlife or other natural resources in a particular area including but not limited to water and oxygen supply.

The project as proposed will impact dissolved oxygen concentrations and finfish production. However, the DEIS states mitigation will result in a minimal net improvement. SCDHEC OCRM believes the use of mechanical oxygen injection systems may not be adequate to maintain current DO levels. Additionally, the Department has concerns regarding the maintenance and long term viability of these systems.

- (6) The extent to which the development could affect the habitats for rare and endangered species of wildlife or irreplaceable historic and archeological sites of South Carolina's coastal zone.

The project as proposed will effect Shortnose Sturgeon spawning, juvenile, and adult habitats. Additionally, SNS habitat will result in a net loss.

- (10) The extent to which the proposed use could affect the value and enjoyment of adjacent owners. (Section 48-39-150, S.C. Coastal Management Act of 1977, as amended).

Adjoining lands owned by the state of South Carolina are currently identified as a potential site for a new ports facility. The use of this site for spoil disposal and maintenance dredge disposal will potentially eliminate the Jasper County location as a suitable location for the Ocean Terminal.

Chapter III, Section VII. A. Wildlife and Fisheries Management

- (1) In the coastal zone, including critical areas, Council (Department) issuance or review and certification of permit applications which would impact wildlife and fisheries resources will be based on the following policies:

- a) Activities deemed, by the South Carolina Coastal Council (now SCDHEC OCRM) in consultation with the South Carolina Wildlife and Marine Resources(now SCDNR) Department, to have a significant negative impact on wildlife and fisheries resources, whether it be on the stocks themselves or their habitat, will not be approved unless overriding socio-economic considerations are involved. In reviewing permit applications relative to wildlife and fisheries resources, social and economic impacts as well as biological impacts will be considered.

The proposed dredging to the depths chosen for the NED and the LP would greatly reduce habitat utilized by fisheries species, Striped Bass, as well as State and Federally listed endangered species, Shortnose Sturgeon. The shallower dredging alternatives are more desirable to both the NED and LP alternatives, however all

Boltin-Kelly to Colonel Hall
 SHEP
 January 25, 2011
 Page 6

dredging alternatives (with or without mitigation) result in a net loss of Striper and SNS habitat.

Chapter III, Policy Section VIII. Dredging

- 1(c) Dredging should not reduce water circulation, water currents, mixing, flushing or salinity in the immediate area.
As proposed, the project will increase the salinities within the immediate and upstream areas, causing a significant impact to the freshwater marshes.
- 2(b) Dredge activities should be restricted in nursery areas, in public and private shellfish grounds during periods of migration, spawning, and early development of important sport and commercial species;
As proposed in the DEIS, the dredging under the NEP and LP plans would negatively impact areas utilized for spawning and early development of Striped Bass. The proposed mitigation for this impact by release of hatchery raised fingerlings by Georgia DNR; however this activity does not offset the spawning or loss of essential habitat.
- 2(c) Dredging and excavation shall not create stagnant water conditions, lethal fish entrapments, or deposit sumps or otherwise contribute to water quality degradation.
As proposed dredging under the NED and LP plans, the project will further degrade the existing water quality conditions.
- 2(e) Dredged materials shall be deposited and contained in such a manner so as to prevent dispersal into adjacent wetland areas;
The project proposes to utilize the deposition of these dredged materials to be placed into the Middle River, Rifle Cut, and the Little Back River; this deposition is for mitigating the predicted increase in salinity.
- 2(h) a specialized form of dredging activity involves the creation and maintenance of navigational channels and access canals. These activities have a potential for severe environmental impacts and should meet a demonstrated public need.
The proposed deepening under the NED and LP plans result in a negative impact to areas of important resources for fisheries and wildlife. The shallower dredging alternatives are more desirable to both the NED and LP alternatives. Additionally, a demonstrated public need for the citizens of South Carolina has not been sufficiently demonstrated. Also, SCDHEC OCRM believes there may be other feasible alternatives that should be explored.

Chapter III, Policy Section XII. Activities in Areas of Special Resource Significance

- C. Navigation Channels
 - 1) Development which would result in loss of navigability will be prohibited

Boltin-Kelly to Colonel Hall
 SHEP
 January 25, 2011
 Page 7

The measures proposed to mitigate for the predicted increase in salinity are to close Rifle Cut and Little Back River. These alterations would result in a loss of navigable waters by the public in these two water bodies.

- D. Public Open Space

- 1) Proposals which would restrict or limit the continued use of a recreational open area or disrupt the character of such a natural area (aesthetically or environmentally) will not be certified where other alternatives exist.

The project proposed to close off Rifle Cut and Little Back River to reduce the potential effects of increased salinity. This proposed activity would restrict the continued use of these water bodies as recreational open areas. The Department believes that other alternatives exist aside from the closure of Rifle Cut and Little Back River.

- E. Wetlands (Outside of Critical Areas)

Findings: In addition to the extensive areas of salt and brackish marsh within the critical areas along the South Carolina coastline, the State's coastal zone also contains over 60,000 acres of fresh-water marshes. These wetlands further up the creeks and rivers, beyond the reach of saltwater at high tides, have a great diversity of plant species. They play a vitally important role in contributing nutrients to the waters which eventually reach the estuarine system (the critical areas). Fresh-water marsh areas are active filters for improving water quality, and since they are linked with the downstream system, they affect water quality in the critical areas. The freshwater marshes are important flood buffers and also function in maintenance of salinity levels in downstream estuaries.

- 1) Project proposals which would require fill or other significant permanent alteration of a productive freshwater marsh will not be approved unless no feasible alternative exist or an overriding public interest can be demonstrated, and any substantial environmental impact can be minimized.

The project as proposed in the preferred LP alternative will impact 1212 acres of freshwater marsh through the introduction of more saline waters. While mitigation is proposed to offset these impacts, there are other feasible alternatives to further minimize the proposed impacts. All other dredging alternatives result in a net loss of freshwater wetlands and saltmarsh, even with mitigation, except for the 44 foot dredge alternative. The 44 foot dredge alternative will result in the net gain of 332 acres of freshwater marsh due to the conversion of brackish wetlands. Additionally, there is no overriding public interest for the citizens of the State of South Carolina in this project. As proposed, all of the benefits from the deepening of the Savannah Harbor will be accrued to the State of Georgia, while the majority of the ecological impacts will occur within the State of South Carolina.

In addition to the enforceable policies of the SCCMP, the proposed project is not consistent with governing regulations for the Critical Areas. Specifically, the following regulations:

- **G. Dredging and Filling:**

Boltin-Kelly to Colonel Hall

SHEP

January 25, 2011

Page 8

2) The specific standards are as follows:

(c) To the maximum extent feasible, dredging and filling activities should be restricted in nursery areas and shellfish grounds and during periods of migration, spawning, and early development of important sport and commercial species;

(d) Dredging and excavation shall not create stagnant water conditions, lethal fish entrapments, or deposit sumps or otherwise contribute to water quality degradation;

H. Navigation Channels and Access Canals:

(1) Certain dredging activities involve the creation and maintenance of navigation channels and access canals. These activities have a potential for severe environmental impacts and should meet a demonstrated public need.

Several of the above cited policies require a demonstration of no feasible alternatives. The Federal Consistency Determination does not sufficiently demonstrate that there are no feasible alternatives. South Carolina's coastal zone management program defines "Feasible" as used in the Coastal Management Program in the context of "unless no feasible alternative exists." "Feasibility is determined by [DHEC OCRM] with respect to individual project proposals. Feasibility in each case is based on the best available information, including technical input from relevant agencies with expertise in the subject area, and considering factors of environmental, economic, social, legal, and technological suitability of the proposed activity and its alternatives. Use of this word includes the concept of reasonableness and likelihood of success in achieving the project goal or purpose. "Feasible alternative" applies both to locations or sites and to methods of design or construction, and includes the no action alternative." Here, the Federal Consistency Determination relies on its determination that adverse impacts will be mitigated. Though the CMP requires that unavoidable impacts be mitigated, there must first be a demonstration of no feasible alternatives/unavoidability. While the Federal Consistency Determination states that there are no feasible alternatives, it does so in a conclusory fashion and does not demonstrate why the other alternatives are not feasible. The Federal Consistency Determination does not consider other locations but only looks at methods for this location. In addition, its conclusion that the no action alternative and other alternatives are not feasible is conclusory and therefore is inadequate as a matter of law.

Based upon the above SCDHEC OCRM does not concur that the five dredging alternatives are consistent with the South Carolina Coastal Management Program (SCCMP) to the maximum extent practicable because it would result in the permanent alteration of productive freshwater marshlands, a net loss in spawning and juvenile habitat for Striped bass and SNS (T&E listed species) and degradation of water quality due to a reduction in dissolved oxygen. The DEIS has not adequately demonstrated that no feasible alternatives exist since other alternatives such as the potential location of the Jasper County Ocean Terminal were not considered. In addition, the DEIS fails to demonstrate an overriding public interest for the citizens of South Carolina. Again, It is DHEC's position that additional time remains to object to the federal agency's consistency determination, and reserves the right to supplement this letter accordingly.

Boltin-Kelly to Colonel Hall

SHEP

January 25, 2011

Page 9

Sincerely,

A handwritten signature in black ink that reads "Carolyn Boltin-Kelly". The script is cursive and fluid, with the first name "Carolyn" written in a larger, more prominent style than the last name "Boltin-Kelly".

Carolyn Boltin-Kelly

cc: Earl Hunter, SCDHEC-OCRM
Barbara Neale, SCDHEC-OCRM
Heather Preston, SCDHEC-BOW
Donna Weiting, Acting Director NOAA-OCRM



K. Earl Hunter, Commissioner

Promoting and protecting the health of the public and the environment

January 31, 2011

Colonel Jeffrey M. Hall, District Commander
U.S. Army Corps of Engineers, Savannah District
P.O. Box 889
Savannah, Georgia 31402-0889

Re: Savannah Harbor Expansion Project: Draft General Re-Evaluation Report and Draft Tier II Environmental Impact Statement

Dear Colonel Hall:

The South Carolina Department of Health and Environmental Control- Office of Ocean and Coastal Resource Management (SCDHEC OCRM) offers the following supplemental comments to our January 25, 2011 letter on the Draft General Re-Evaluation Report (DGRR) and the Tier II Draft Environmental Impact Statement (DEIS) for the Savannah Harbor Expansion Project. As stated previously SCDHEC-OCRM maintains that the time period allowed for the State to comment on this direct federal activity is a total of 75 days. Therefore, SCDHEC-OCRM maintains that the close of the comment period is close of business January 31, 2011.

Chapter IV Special Management Areas

A. Geographic Areas of Particular Concern (GAPC)

- (8)(c) Areas of Historic, Archeological or Cultural Significance: The extent and significance of negative impacts on Geographic Areas of Particular Concern (GAPCs). The determination of negative impacts will be made by OCRM in each case with reference to the priorities of use for the particular GAPC. Applications which would significantly impact a GAPC will not be approved or certified unless there are no feasible alternatives or an overriding public interest can be demonstrated, and any substantial environmental impact is minimized.

The proposed project may potentially impact archeological resources which are potentially eligible, eligible or listed on the National Register. Specifically, two anomalies within SC waters between Stations 41+500 – 49+500, two confederate crib obstructions within GA and SC waters between stations 55+000 – 68+500 and the CSS Georgia. SCDHEC OCRM staff has coordinated with the South Carolina Department of Archives and History (SHPO) and re-enforce their concerns in a letter to you dated December 7, 2010. SCDHEC OCRM has the responsibility to consider the impacts to the extent to which the proposed project will have on these resources.


SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
Ocean and Coastal Resource Management

Charleston Office • 1362 McMillan Avenue • Suite 400 • Charleston, SC 29405 • Phone: (843) 953-0200 • Fax: (843) 953-0201 • www.scdhec.gov

Boltin-Kelly to Colonel Hall
SHEP
January 31, 2011

SCDHEC OCRM does not concur that the five dredging alternatives are consistent with the South Carolina Coastal Management Program (SCCMP) to the maximum extent practicable because it will potentially result in the adverse impact to GAPCs. However, SCDHEC-OCRM could find this aspect of the federal activity consistent if properly mitigated to SHPOs satisfaction.

Sincerely,

A handwritten signature in black ink that reads "Carolyn Boltin-Kelly". The script is cursive and fluid, with the first name "Carolyn" being larger and more prominent than the last name "Boltin-Kelly".

Carolyn Boltin-Kelly

cc: Earl Hunter, SCDHEC-OCRM
Barbara Neale, SCDHEC-OCRM
Heather Preston, SCDHEC-BOW
Donna Weiting, Acting Director NOAA-OCRM

BOARD:

Paul C. Aughton, III
Chairman

Edson H. Cropper, III
Vice Chairman

Steven G. Koser
Secretary



C. Ead Hunter, Commissioner

Promoting and protecting the health of the public and the environment

BOARD:

Henry C. Scott

M. David Mitchell, MD

Glenn A. McCall

Colleen E. Buckhouse, MD

March 3, 2011

William Bailey
US Army Corps of Engineers, Savannah District
100 West Oglethorpe Avenue
Savannah, Georgia 31401

Re: P/N 2010 SHEP; Savannah Harbor Expansion Project (SHEP); Water Quality Certification

Dear Mr. Bailey:

The South Carolina Department of Health and Environmental Control (Department) received your application on November 15, 2010, for a 401 Water Quality Certification to deepen the navigation channel in the Savannah River. After reviewing the General Re-Evaluation Report (GRR) and the draft Tier II Environmental Impact Statement (EIS) submitted with the permit application, the Department is concerned that the project, as proposed, does not meet the requirements for issuance of a Water Quality Certification pursuant to Section 401 of the Clean Water Act and the requirements of State Regulation 61-101, Water Quality Certification.

In assessing the water quality impacts of this project, Regulation 61-101 requires that the Department address and consider whether there are feasible alternatives to the activity. Section F.(5)(b) of this regulation states that certification will be denied if there is a feasible alternative to the activity which reduces adverse consequences on water quality and classified water uses. The GRR and the EIS mentioned several alternatives that would alter the project impacts. Some of these alternatives include dredging to various project depths, various mitigation plans, and several alternative sites. Although the documents consider some alternatives, the analysis does not thoroughly evaluate all feasible alternatives for a project of this magnitude. For example, it seems reasonable to consider alternatives on a regional basis for such a large-scale project involving significant environmental impacts. The GRR and EIS do not consider whether or not other southeastern ports could be expanded with less cost or environmental impacts.

The Savannah River Maritime Commission, the South Carolina Department of Natural Resources, and the Southern Environmental Law Center each submitted comments on the GRR and EIS. These letters suggest that the Jasper Port Terminal alternative is viable and may have less environmental impacts than the proposed deepening. For these reasons, the establishment of a Jasper Port Terminal should be given detailed consideration as an option to the extensive cost and environmental impacts associated with the proposed expansion of the Garden City Terminal. The Department cannot meet its obligation under Regulation 61-101 by issuing a certification without a thorough investigation of all feasible alternatives. It is recommended that the

SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL

2600 Bull Street • Columbia, SC 29201 • Phone: (803) 898-3432 • www.scdhec.gov

alternatives analysis for the project be amended to include the evaluation of all feasible alternatives to the proposed project.

In evaluating any project pursuant to Regulation 61-101, the Department must certify that there is reasonable assurance that the activity will be conducted in a manner that will not violate applicable water quality standards. The Water Classifications and Standards listed in Regulation 61-68 were promulgated in accordance with Section 303 of the Clean Water Act. This regulation also contains antidegradation rules that were established to ensure the protection of existing uses and water quality regardless of the water classification.

Existing conditions in the Savannah River have resulted in contraventions of the dissolved oxygen (DO) standard, particularly in the river estuaries during the warm summer months. The studies conducted for the SHEP indicate that the project will cause additional impacts to DO levels in the river system. Adding DO impacts to a waterbody that is currently experiencing low DO at certain times of the year is not consistent with the antidegradation rules of Regulation 61-68. The Corps plans to use Speece Cones to inject oxygen into the river to mitigate for the DO impacts resulting from the proposed deepening.

After evaluating the DO modeling data, and the mitigation proposal outlined in the GRR and EIS, the Department is concerned with the uncertainty relating to the use of mechanical injection as mitigation for the DO impacts, especially in the shallow water areas of the Back River. The Corps is relying entirely on modeling data to support the conclusion that the Speece Cones will adequately restore DO in the river system to pre-project conditions. Furthermore, the oxygen injection system is a very costly method to mitigate for the projected impacts, and the funding for the long-term operational costs depends on unpredictable annual appropriations. Until the uncertainty from the DO impacts and mitigation has been thoroughly investigated, and reasonable assurance is provided that the project will protect existing uses and water quality standards for the life of the project, the Department cannot find the project consistent with the requirements of Regulation 61-101.

In addition to the impacts from DO, the ecosystem will also sustain significant wetland impacts. The project will impact 14.08 acres of salt marsh wetlands from excavation and indirectly impact 1,212 acres of freshwater wetlands due to increased salinity at the maximum project depth. The Corps has proposed a mitigation plan to offset these impacts. This plan includes the preservation of various properties that will become part of the Savannah National Wildlife Refuge (SNWR), the restoration of wetlands through flow altering structures, and the creation of salt marsh by grading down an area of high ground that was previously used as a dredge disposal area.

Section F.(5)(a) of Regulation 61-101 states that certification will be denied if the proposed activity alters the ecosystem in the vicinity of the project such that its functions and values are eliminated or impaired. The mitigation proposal submitted in the GRR and EIS fails to give reasonable assurance that the ecosystem will not be permanently impaired by the extensive wetland impacts from salinity intrusion. The preservation component of the mitigation plan lists several properties that would be acquired and subsequently placed under control of the SNWR. Although the EIS states that these properties contain desirable ecological resources, the

amount of wetland acreage or type of wetlands contained in these properties was not included in the EIS. In addition, the mitigation credit taken by the Corps for restoration includes the creation of 1,068 acres of brackish marsh for the 48 ft depth alternative. The flow altering structures will reduce salinity in some of the marsh areas; however, these structures will cause the conversion of salt and freshwater marsh to brackish marsh. The loss of any type of marsh should be considered an impact. Given the extensive loss of existing freshwater marsh within the ecosystem and the lack of an appropriate mitigation plan, the Department cannot certify that this project complies with the mandates in Regulations 61-101 and 61-68.

Much of the marsh areas that will be impacted by this project are located in the SNWR. Much of these impacts are to freshwater tidally influenced wetlands. These areas have been in decline for many years due to salinity intrusion from natural causes and from past harbor deepening activities. The proposed project poses a significant threat to these unique areas. The mitigation plan includes preservation of land that will be acquired by the refuge. As stated previously, the Department is concerned that the out-of-kind preservation of land does not adequately offset the significant loss of ecological resources due to this project. Regulation 61-101 states that certification will be denied if the proposed activity impacts special or unique habitats. The SNWR is considered a unique area, as such, the Department cannot issue a certification for the proposed activity unless the United States Fish and Wildlife Service (USFWS) gives concurrence that this project will not cause adverse impacts to the SNWR.

The proposed deepening will occur in waters containing Federally recognized threatened or endangered species. Species such as Shortnosed sturgeon, Atlantic sturgeon, various sea turtles, and West Indian manatees may all be impacted by the project. The loss of a significant portion of Shortnose sturgeon habitat due to lower DO levels and salinity intrusion is of particular concern. Regulation 61-101 states in Section 5(c) that certification will be denied if the project adversely impacts waters containing State or Federally recognized rare, threatened, or endangered species. Although the Corps proposes to mitigate for the loss of Shortnose sturgeon habitat by installing fish passage at the Savannah Bluff Lock and Dam, it is not known if this measure will adequately mitigate for the impacts to sturgeon. Endangered species impacts are typically evaluated by resource agencies such as the USFWS and the National Marine Fisheries Service (NMFS). Without concurrence from these agencies that the project will not cause adverse impacts to threatened or endangered species, the Department cannot certify this project.

In addition to the above list of concerns about the proposed project, the Department has not received a complete response to our previous request for information. On November 23, 2010, the Department sent a letter requesting an affidavit of public notice for the project, a list of adjacent property owners, and the application fee of \$1,000. We received the affidavit and list of property owners, but we have not received the requested fee. Pursuant to Regulation 61-30, Environmental Protection Fees, the Department is authorized to collect application fees for Water Quality Certification.

In conclusion, the Department has several concerns about issuing a certification for this project. As currently proposed, this project does not meet the requirements for issuance of a Water Quality Certification pursuant to Section 401 of the Clean Water Act, 33 U.S.C. Section 1341, and the requirements of State Regulation 61-101, Water Quality Certification. It is

strongly recommended that the Corps withdraw the current application and address the issues outlined in this letter before continuing the 401 Certification process. If the Corps determines that it is necessary to move forward with a certification decision at this time, the fee should be submitted as soon as possible. Pursuant to Regulation 61-30, and Regulation 61-101, the Department has 180 days to complete action on an application for 401 Water Quality Certification or the assessed fee must be returned. These 180 days include only those days in which the Department is actively reviewing the application; the clock stops when information is requested and the Department is waiting on a response. Accordingly, the 180-day clock for this project will not start until the Department receives the requested fee and subsequent information. Should you have any questions, you may call me at (803) 898-4261 or you may e-mail beckhajt@dhec.sc.gov.

Sincerely,

A handwritten signature in black ink, appearing to read "Chris Beckham", with a long, sweeping horizontal line extending to the right.

Chris Beckham, Project Manager
Water Quality Certification & Wetlands Section



DEPARTMENT OF THE ARMY
SAVANNAH DISTRICT, CORPS OF ENGINEERS
 100 W. OGLETHORPE AVENUE
 SAVANNAH, GEORGIA 31401-3640

REPLY TO
 ATTENTION OF:

March 30, 2011

Office of Counsel

Ms. Carolyn Boltin-Kelly
 Deputy Commissioner
 Office of Ocean and Coastal Resource Management,
 South Carolina Department of Health and Environmental Control
 1362 McMillan Avenue, Suite 400
 Charleston, South Carolina 29405

Dear Ms. Boltin-Kelly:

In your letters, dated January 25, 2011 and January 31, 2011, you offered comments on the Draft General Reevaluation Report (GRR) and the Tier II Draft Environmental Impact Statement (DEIS) for the Savannah Harbor Expansion Project (SHEP) objecting to the Corps' determination that the project is consistent, to the maximum extent practicable, with South Carolina's Coastal Management Program (SCCMP). Your letter enumerates the enforceable policies applicable to the SHEP as: (1) Wildlife and fisheries management; (2) dredging; (3) Navigation channels; (4) Public open space; (5) Wetlands, and (6) Areas of historic, archaeological or cultural significance. However, your letter only offers commentary on how the Department of Health and Environmental Control (DHEC) does not concur with the Corps' determination that the SHEP is consistent with the aforementioned policies, and fails to offer recommendations that could be implemented into the project to obtain DHEC's concurrence.

Your letter identified several reasons why you disagree with the Corps' determination that the SHEP is consistent with the enforceable policies in the South Carolina Coastal Management Program (SCCMP). The enclosures contain our responses to each of those reasons.

It appears that your letter is not consistent with the enforceable policies in the SCCMP because it failed to consider the national interest and regional benefits of SHEP, failed to follow your policies regarding existing versus new port facilities, and failed to substantiate your consistency review with supporting information.

Your Coastal Zone Management Act (CZMA) consistency review failed to consider the national interest and regional benefits of the SHEP. Such consideration is mandated by Federal Law and regulations, South Carolina State Law, and the SCCMP. The CZMA at 16 U.S.C. § 1454(d)(12), requires that a management plan contain "a method for assuring that local land use and water use regulations within the coastal zone do not unreasonably restrict or exclude land uses of regional benefit." The National Oceanic and Atmospheric Administration (NOAA), CZMA regulations at 15 C.F.R. 923.12 state that in accordance with this statutory requirement a management program must "identify what constitutes uses of regional benefit" 15 C.F.R. § 923.12(a) and "identify and utilize one or a combination of methods, consistent with the control

techniques employed by the State, to assure local land and water use regulations do not unreasonably restrict or exclude uses of regional benefit." 15 C.F.R § 923.12(b). Also, 15 C.F.R § 923.52(a) states that a "management program must provide for adequate consideration of the national interest involved in planning for, and managing the coastal zone, including the siting of facilities...which are of greater than local significance." To this end, S.C. Code. Ann. § 48-39-80(B)(6) states that the management program shall "provide for adequate consideration of the local, regional, state, and national interest involved in the siting of facilities for...adequate transportation facilities and other public services necessary to meet requirements which are other than local in nature."

The SCCMP defines activities considered to be of regional benefit as those that "1) have been identified as Activities Subject to Management, that is, those determined to have direct and significant impact on coastal waters, and 2) result in a multi-county environmental, economic, social, or cultural benefit," SCCMP at III-8. The SCCMP explicitly states that "Activities of Regional Benefit in the South Carolina coastal zone are: 1) Transportation facilities – including...ports". Id. The SCCMP also states that the "following concerns are considered by South Carolina to be of such long-range, comprehensive importance as to be in the national interest: 1. National Defense" and "3. Maintenance of Navigation". SCCMP at III-5. The SCCMP goes on to state that "Resource Policies of particular interest for national defense are: Transportation a) Ports" and "Dredging, a) Dredging, b) Dredge Material Disposal." SCCMP at III-6.

The SHEP is a substantial navigation project that involves both dredging and dredge material disposal that our studies indicate will produce well over \$100 million a year in national economic benefits. The SCCMP explicitly states that port projects are activities of regional benefit. The SCCMP explicitly states the maintenance of navigation is a concern of national interest. The SCCMP explicitly states that national defense is a concern of national interest and that ports, dredging, and dredge material disposal are of particular interest for National defense. Federal and State laws require that your consistency determinations adequately consider the national interest and regional benefits of projects submitted for your review. However, your review did not recognize the national interest or regional benefits of the SHEP. Your consistency review contains statements that directly contradict your policies. The Garden City Terminal, the facility that will receive most of the more efficiently received cargo, is sited only miles from the border of South Carolina. The SCCMP states that the ports and commercial waterways of South Carolina "have a major National impact by providing a means of access to international and domestic markets." SCCMP at III-19. Yet, your letter of January 25, 2011, at pp. 7, states that "all of the benefits from the deepening of the Savannah Harbor will be accrued to the state of Georgia..." In light of the SCCMP statements regarding the great importance of South Carolina ports, all of which handle substantially less cargo than Savannah Harbor, and are not located as close to any bordering state, your conclusion doesn't appear to be supported or enforceable.

The next area where your consistency review is inconsistent with the SCCMP is in its discussion of a Jasper Ocean Terminal. The SCCMP states that "new port development should take place in existing industrialized areas where sufficient support facilities are available


including public utilities, rail and highway transportation access, and navigation channels which are already maintained, unless there are no feasible alternatives or an overriding public interest can be demonstrated, and any substantial environment damage can be minimized." SCCMP at III- 19-20. The SCCMP also states that when considering port and harbor development projects in the coastal zone a policy of "maximizing the use of existing developed port areas, when feasible, before establishing new facilities in relatively undeveloped areas" should be considered. SCCMP at III-21. Thus, it is apparent that the SCCMP strongly supports the development of existing port facilities in favor of constructing new ports. Also, as you are aware, there is no current utility, highway, or rail access to a potential Jasper Ocean Terminal site.

Finally your consistency review failed to provide any supporting information upon which your determination is based. The SCCMP states that "should the State agency disagree with the Federal agency's determination, it must accompany its response with the reasons for disagreement as well as supporting information upon which its decision is based." SCCMP at V-16. Your review was not accompanied by information providing a basis for your decision.

In conclusion, the SCCMP itself summarizes the principle that underpins the CZMA consistency requirement; that "national interests must be taken into consideration by coastal states, and in return for this concession, the states are allowed a greater say in the future of their coastal zones." SCCMP at V-15. We continue to believe that the SHEP is consistent, to the maximum extent practicable, with SCCMP. We trust these explanations will allow you to concur in our determination.

I look forward to receiving your recommendations and appreciate and look forward to our continued collaboration on this project. If you would like to meet to discuss these matters, please let me know.

Sincerely,



Jeffrey M. Hall
Colonel, US Army
Commanding

Enclosures

Enclosure 1



January 25, 2011

Colonel Jeffrey M. Hall, District Commander
U.S. Army Corps of Engineers, Savannah District
P.O. Box 889
Savannah, Georgia 31402-0889

Re: Savannah Harbor Expansion Project: Draft General Re-Evaluation Report and Draft Tier II Environmental Impact Statement

Dear Colonel Hall:

The South Carolina Department of Health and Environmental Control- Office of Ocean and Coastal Resource Management (SCDHEC OCRM or DHEC or the Department) has made great efforts to review the Draft General Re-Evaluation Report (DGRR) and the Tier II Draft Environmental Impact Statement (DEIS) (collectively referred to herein as the Federal Agency Consistency Determination) for the Savannah Harbor Expansion Project within the time frame provided by your letter of January 24, 2011. However, the Department disagrees with your analysis of the timeframe that the Coastal Zone Management Act provides to the Department to provide comments.

The Department received notice of the federal agency's consistency determination on November 17, 2010.¹ 15 C.F.R. § 930.41(a) provides the State agency 60 days from receipt of the Federal agency's consistency determination and supporting information to inform the federal agency of the state agency's concurrence with or objection to the Federal agency's consistency determination. In addition, 15 C.F.R. § 930.41(b) provides that state agency concurrence shall not be presumed in cases where the State agency, within the 60-day period, requests an extension of time to review the matter. This regulation requires the Federal agency to approve one request for an extension period of fifteen days or less, if requested, and authorizes the Federal agency to approve a longer or additional extension period as appropriate. Additionally, this regulation requires that the Federal agency should consider the magnitude and complexity of the information contained in the consistency determination when considering whether a longer or an additional extension period is appropriate. DHEC OCRM requested additional time to evaluate the project on Dec. 3, 2010 and again on January 21, 2011. Because there is no discretion given to the Federal Agency to deny a first request for an additional fifteen days, the federal agency may not presume state concurrence until at least seventy-five days after the State agency's

¹ In your letter dated January 24, 2011, you indicate that you provided notice to the state agency on November 15, 2010. In fact, the Department received notice of the Corps' consistency determination on November 17, 2010. 15 C.F.R. § 930.41 provides the state agency "60 days from receipt of the Federal agency's consistency determination and supporting information" to provide notice to the Federal agency of the state agency's response.

Ocean and Coastal Resource Management

Charleston Office • 1362 McMillan Avenue • Suite 100 • Charleston, SC 29405 • Phone: (843) 253-0200 • Fax: (843) 953-0201 • www.scdhecgov

Boltin-Kelly to Colonel Hall
 SHEP
 January 25, 2011
 Page 2

receipt of notice of the federal agency's consistency determination.² Thus, DHEC has at least until January 31, 2011 to notify the Federal agency of its objection to the Federal agency's consistency determination.³ Additionally, given the magnitude and complexity of the information contained in the consistency determination, the Federal agency should grant an additional or longer period and the Department again requests that the Corps exercise its discretion and authorize the Department additional time to submit further comments on the federal agency's consistency determination. The Department believes that the 15 day extension is necessary to give the public and resource agencies the proper time to evaluate the project due to the "complexity and magnitude of the information" and the timeliness of the public notice during holiday season.

Reserving the Department's rights under the Act to submit additional comments objecting to the federal agency's consistency determination within the maximum amount of time provided under 15 C.F.R. § 930.41(b), the Department objects to the federal agency's consistency determination based on the following grounds.

As an initial matter, as the Federal Consistency Determination points out, the Coastal Zone Management Act, 16 U.S.C. §§ 1451, et. seq., requires that "Each federal agency activity within or outside the coastal zone that affects any land or water use or natural resource of the coastal zone shall be carried out in a manner which is consistent to the maximum extent practicable with the enforceable policies of approved state management programs." 16 U.S.C. § 1456(c)(1)(A). "Consistent to the maximum extent feasible" is defined in the Regulations promulgated by the Secretary of Commerce and means "fully consistent with the enforceable policies of management programs unless full consistency is prohibited by existing law applicable to the Federal Agency." 15 C.F.R. § 930.32(a)(1). The Regulations further provide that "if a Federal agency asserts that full consistency with the management program is prohibited, it shall clearly describe, in writing, to the State agency the statutory provisions, legislative history, or other legal authority which limits the Federal agency's discretion to be fully consistent with the enforceable policies of the management program." 15 C.F.R. 930.32(a)(2). Here, the Federal Agency has not identified in writing to the state agency any existing law which prohibits full consistency with South Carolina's approved management program. Therefore, because the federal agency has not identified to the state agency any existing laws which prohibit full consistency, the

² In your letter dated January 24, 2011, you rely on the "Corps [sic] coastal zone consistency regulations (33 C.F.R. 336.1, et. seq.)" which purport to provide a 45-day window for state agency review but also have the requirement that the Corps grant a 15-day extension if an extension is requested and which also provide the Corps with authority to grant additional or longer extensions. The Department sees no statutory authority in the Coastal Zone Management Act for the Corps of Engineers to promulgate regulations different from the regulations promulgated by the Secretary of Commerce to carry out the provisions of the Coastal Zone Management Act. The Congress specifically gave the Secretary of Commerce the authority to promulgate regulations necessary to carry out the provisions of this chapter. See 16 U.S.C. § 1463 and 16 U.S.C. § 1453(16) (defining "secretary" as the "Secretary of Commerce.") The Secretary of Commerce has promulgated these regulations under 15 C.F.R. Part 930. Therefore, though the Department is issuing this letter in accordance with the timeframe you set forth in your letter dated January 24, 2011, the Department reserves its full authority under 15 C.F.R. Part 930 et. seq., to use the full timeframe provided therein to comment on the federal agency's consistency determination.

³ Even using the November 15, 2010 date upon which the Corps asserts that the clock begins to run, the seventy fifth day falls on Saturday, January 29, 2011.

Boltin-Kelly to Colonel Hall
 SHEP
 January 25, 2011
 Page 3

Coastal Zone Management Act's requirement that the federal agency activity be consistent to the maximum extent practicable requires that the Federal agency activity be fully consistent with South Carolina's approved management program.

Based on staff's evaluation of the DGRR, DEIS and the Savannah District Army Corp of Engineers Federal Consistency Determination, the SCDHEC OCRM does not concur that the five dredging alternatives are consistent with the South Carolina Coastal Management Program (SCCMP). The following specific policies and responses will inform you how the proposed activity is inconsistent with the SCCMP:

Chapter III, Section C.I. Guidelines for Evaluation of All Projects:

- (1)(b) The extent to which the project will further the policies of the South Carolina General Assembly which are mandated for OCRM in implementation of its management program these being: (b) To protect and, where possible, to restore or enhance the resources of the State's coastal zone for this and succeeding generations. (Sections 48-39-30(B)(1) and (2), S.C. Coastal Management Act of 1977)

The project as proposed will not restore or enhance the resources of the state but will result in a degradation of coastal resources.

- (2) The extent to which the project will have adverse impacts on the "critical areas" (beach/dune system, coastal waters, tidelands).

The project as proposed will reduce dissolved oxygen, and depends on mechanical means in an attempt to maintain current levels. This causes a net loss of degraded fisheries habitat.

- (3) The extent to which the project will protect, maintain or improve water quality, particularly in coastal aquatic areas of special resource value, for example, spawning areas or productive oyster beds.

The proposed dredging to deepen the Savannah Harbor as set forth in the National Economic Development (NED) Plan, 47-foot Depth Alternative, and the Locally Preferred (LP) Plan, 48-foot Depth Alternative, will reduce the dissolved oxygen levels in the Savannah River from the existing state in an area utilized for spawning of important fisheries species including striped bass and shortnose sturgeon (SNS). Mitigation for this impact is to stock bass fingerlings provided by Georgia DNR and construction of a fishway for Shortnose Sturgeon at the New Savannah Bluff Lock & Dam at Augusta Georgia. Stocking of fingerlings does not eliminate impacts to spawning and nursery areas for the Striped Bass and the construction of a fishway does not assure the Shortnose Sturgeon will be able to use it. In the event low DO (Dissolved Oxygen) levels fall below current concentrations, as predicted in the DEIS, the lower part of the river may not be passable by adult or juvenile sturgeon. The shallower dredging alternatives are more desirable to both the NED and LP alternatives, however all dredging alternatives (with or without mitigation) result in a net loss of Striper and SNS habitat.

Boltin-Kelly to Colonel Hall
 SHEP
 January 25, 2011
 Page 4

- (4) The extent to which the project will meet existing State and Federal Requirements for waste discharges, specifically point sources of air and water discharge, and for protection of inland wetlands.

Models described in the EIS indicate impacts to large areas of freshwater marshlands including important habitat for fish, wading birds, & waterfowl. While efforts have been addressed to minimize impacts, a minimum of 337 acres of freshwater marsh will be affected by salt waters. Mitigation for this impact is to preserve additional wetlands adjacent to the Savannah River National Wildlife Refuge. Preservation does not replace the lost values and functions of the impacted freshwater marsh.

- (7) The possible long-range, cumulative effects of the project, when reviewed in the context of other possible development and the general character of the area.

This project will result in a very large volume of spoils that will use significant areas within the existing spoils disposal sites, located mostly in Jasper County, resulting in shorter life expectancy of the CDF (Contained Disposal Facility). This may result in the need for additional wetland impacts for expansion of the CDF in Jasper County. Additional impacts from existing port expansions, storage, and transportation facilities associated with the port will likely result in additional impacts to wetlands and water quality. The proposed disposal of spoils in the CDF will potentially eliminate the possibility of a new port in Jasper County.

- (8) The extent and significance of negative impacts on Geographic Areas of Particular Concern (GAPCs). The determination of negative impacts will be made by OCRM in each case with reference to the priorities of use for the particular GAPC. Applications which would significantly impact a GAPC will not be approved or certified unless there are no feasible alternatives or an overriding public interest can be demonstrated, and any substantial environmental impact is minimized.

The proposed project will impact habitat for the federally endangered Shortnose Sturgeon. Endangered species habitat is considered GAPC in the SCCZMP. Mitigation offered to offset this impact is to construct a fishway at the New Savannah Bluff Lock & Dam. There is no certainty that the sturgeon will use this structure or that it will have any effect on spawning or survival of this species. Additionally, the project proposes a net loss of SNS habitat.

- (9) The extent and significance of impact on the following aspects of quality or quantity of these valuable coastal resources:

- (i) unique natural areas—destruction of endangered wildlife or vegetation or of significant marine species (as identified in the Living Marine Resources segment), degradation of existing water quality standards.

This project will have a significant impact on Striped Bass and Shortnose Sturgeon. Mitigation of these impacts is dependent on mechanical means (oxygen injection and release of fingerlings) that has not been adequately demonstrated to reduce or eliminate the impacts to water quality and fish survival.

Boltin-Kelly to Colonel Hall
 SHEP
 January 25, 2011
 Page 5

Chapter III, Section C.II. In critical areas of the coastal zone, it is OCRM policy that, in determining whether a permit application is approved or denied, OCRM "shall base its determination on the individual merits of each application, the policies specified in Sections 48-39-20 and 48-39-30 (of the Act), and be guided by the following general considerations:

- (3) The extent to which the applicant's completed project would affect the production of fish, shrimp, oysters, crabs or clams or any marine life or wildlife or other natural resources in a particular area including but not limited to water and oxygen supply.

The project as proposed will impact dissolved oxygen concentrations and finfish production. However, the DEIS states mitigation will result in a minimal net improvement. SCDHEC OCRM believes the use of mechanical oxygen injection systems may not be adequate to maintain current DO levels. Additionally, the Department has concerns regarding the maintenance and long term viability of these systems.

- (6) The extent to which the development could affect the habitats for rare and endangered species of wildlife or irreplaceable historic and archeological sites of South Carolina's coastal zone.

The project as proposed will effect Shortnose Sturgeon spawning, juvenile, and adult habitats. Additionally, SNS habitat will result in a net loss.

- (10) The extent to which the proposed use could affect the value and enjoyment of adjacent owners. (Section 48-39-150, S.C. Coastal Management Act of 1977, as amended).

Adjoining lands owned by the state of South Carolina are currently identified as a potential site for a new ports facility. The use of this site for spoil disposal and maintenance dredge disposal will potentially eliminate the Jasper County location as a suitable location for the Ocean Terminal.

Chapter III, Section VII. A. Wildlife and Fisheries Management

- (1) In the coastal zone, including critical areas, Council (Department) issuance or review and certification of permit applications which would impact wildlife and fisheries resources will be based on the following policies:

- a) Activities deemed, by the South Carolina Coastal Council (now SCDHEC OCRM) in consultation with the South Carolina Wildlife and Marine Resources(now SCDNR) Department, to have a significant negative impact on wildlife and fisheries resources, whether it be on the stocks themselves or their habitat, will not be approved unless overriding socio-economic considerations are involved. In reviewing permit applications relative to wildlife and fisheries resources, social and economic impacts as well as biological impacts will be considered.

The proposed dredging to the depths chosen for the NED and the LP would greatly reduce habitat utilized by fisheries species, Striped Bass, as well as State and Federally listed endangered species, Shortnose Sturgeon. The shallower dredging alternatives are more desirable to both the NED and LP alternatives, however all

Boltin-Kelly to Colonel Hall
 SHEP
 January 25, 2011
 Page 6

dredging alternatives (with or without mitigation) result in a net loss of Striper and SNS habitat.

Chapter III, Policy Section VIII. Dredging

- 1(c) Dredging should not reduce water circulation, water currents, mixing, flushing or salinity in the immediate area.
As proposed, the project will increase the salinities within the immediate and upstream areas, causing a significant impact to the freshwater marshes.
- 2(b) Dredge activities should be restricted in nursery areas, in public and private shellfish grounds during periods of migration, spawning, and early development of important sport and commercial species;
As proposed in the DEIS, the dredging under the NEP and LP plans would negatively impact areas utilized for spawning and early development of Striped Bass. The proposed mitigation for this impact by release of hatchery raised fingerlings by Georgia DNR; however this activity does not offset the spawning or loss of essential habitat.
- 2(c) Dredging and excavation shall not create stagnant water conditions, lethal fish entrapments, or deposit sumps or otherwise contribute to water quality degradation.
As proposed dredging under the NED and LP plans, the project will further degrade the existing water quality conditions.
- 2(e) Dredged materials shall be deposited and contained in such a manner so as to prevent dispersal into adjacent wetland areas;
The project proposes to utilize the deposition of these dredged materials to be placed into the Middle River, Rifle Cut, and the Little Back River; this deposition is for mitigating the predicted increase in salinity.
- 2(h) a specialized form of dredging activity involves the creation and maintenance of navigational channels and access canals. These activities have a potential for severe environmental impacts and should meet a demonstrated public need.
The proposed deepening under the NED and LP plans result in a negative impact to areas of important resources for fisheries and wildlife. The shallower dredging alternatives are more desirable to both the NED and LP alternatives. Additionally, a demonstrated public need for the citizens of South Carolina has not been sufficiently demonstrated. Also, SCDHEC OCRM believes there may be other feasible alternatives that should be explored.

Chapter III, Policy Section XII. Activities in Areas of Special Resource Significance

- C. Navigation Channels
 - 1) Development which would result in loss of navigability will be prohibited

Boltin-Kelly to Colonel Hall
 SHEP
 January 25, 2011
 Page 7

The measures proposed to mitigate for the predicted increase in salinity are to close Rifle Cut and Little Back River. These alterations would result in a loss of navigable waters by the public in these two water bodies.

- **D. Public Open Space**

- 1) Proposals which would restrict or limit the continued use of a recreational open area or disrupt the character of such a natural area (aesthetically or environmentally) will not be certified where other alternatives exist.

The project proposed to close off Rifle Cut and Little Back River to reduce the potential effects of increased salinity. This proposed activity would restrict the continued use of these water bodies as recreational open areas. The Department believes that other alternatives exist aside from the closure of Rifle Cut and Little Back River.

- **E. Wetlands (Outside of Critical Areas)**

Findings: In addition to the extensive areas of salt and brackish marsh within the critical areas along the South Carolina coastline, the State's coastal zone also contains over 60,000 acres of fresh-water marshes. These wetlands further up the creeks and rivers, beyond the reach of saltwater at high tides, have a great diversity of plant species. They play a vitally important role in contributing nutrients to the waters which eventually reach the estuarine system (the critical areas). Fresh-water marsh areas are active filters for improving water quality, and since they are linked with the downstream system, they affect water quality in the critical areas. The freshwater marshes are important flood buffers and also function in maintenance of salinity levels in downstream estuaries.

- 1) Project proposals which would require fill or other significant permanent alteration of a productive freshwater marsh will not be approved unless no feasible alternative exist or an overriding public interest can be demonstrated, and any substantial environmental impact can be minimized.

The project as proposed in the preferred LP alternative will impact 1212 acres of freshwater marsh through the introduction of more saline waters. While mitigation is proposed to offset these impacts, there are other feasible alternatives to further minimize the proposed impacts. All other dredging alternatives result in a net loss of freshwater wetlands and saltmarsh, even with mitigation, except for the 44 foot dredge alternative. The 44 foot dredge alternative will result in the net gain of 332 acres of freshwater marsh due to the conversion of brackish wetlands. Additionally, there is no overriding public interest for the citizens of the State of South Carolina in this project. As proposed, all of the benefits from the deepening of the Savannah Harbor will be accrued to the State of Georgia, while the majority of the ecological impacts will occur within the State of South Carolina.

In addition to the enforceable policies of the SCCMP, the proposed project is not consistent with governing regulations for the Critical Areas. Specifically, the following regulations:

G. Dredging and Filling:

Boltin-Kelly to Colonel Hall
 SHEP
 January 25, 2011
 Page 8

2) The specific standards are as follows:

(c) To the maximum extent feasible, dredging and filling activities should be restricted in nursery areas and shellfish grounds and during periods of migration, spawning, and early development of important sport and commercial species;

(d) Dredging and excavation shall not create stagnant water conditions, lethal fish entrapments, or deposit sumps or otherwise contribute to water quality degradation;

H. Navigation Channels and Access Canals:

(1) Certain dredging activities involve the creation and maintenance of navigation channels and access canals. These activities have a potential for severe environmental impacts and should meet a demonstrated public need.

Several of the above cited policies require a demonstration of no feasible alternatives. The Federal Consistency Determination does not sufficiently demonstrate that there are no feasible alternatives. South Carolina's coastal zone management program defines "Feasible" as used in the Coastal Management Program in the context of "unless no feasible alternative exists." "Feasibility is determined by [DHEC OCRM] with respect to individual project proposals. Feasibility in each case is based on the best available information, including technical input from relevant agencies with expertise in the subject area, and considering factors of environmental, economic, social, legal, and technological suitability of the proposed activity and its alternatives. Use of this word includes the concept of reasonableness and likelihood of success in achieving the project goal or purpose. "Feasible alternative" applies both to locations or sites and to methods of design or construction, and includes the no action alternative." Here, the Federal Consistency Determination relies on its determination that adverse impacts will be mitigated. Though the CMP requires that unavoidable impacts be mitigated, there must first be a demonstration of no feasible alternatives/unavoidability. While the Federal Consistency Determination states that there are no feasible alternatives, it does so in a conclusory fashion and does not demonstrate why the other alternatives are not feasible. The Federal Consistency Determination does not consider other locations but only looks at methods for this location. In addition, its conclusion that the no action alternative and other alternatives are not feasible is conclusory and therefore is inadequate as a matter of law.

Based upon the above SCDHEC OCRM does not concur that the five dredging alternatives are consistent with the South Carolina Coastal Management Program (SCCMP) to the maximum extent practicable because it would result in the permanent alteration of productive freshwater marshlands, a net loss in spawning and juvenile habitat for Striped bass and SNS (T&E listed species) and degradation of water quality due to a reduction in dissolved oxygen. The DEIS has not adequately demonstrated that no feasible alternatives exist since other alternatives such as the potential location of the Jasper County Ocean Terminal were not considered. In addition, the DEIS fails to demonstrate an overriding public interest for the citizens of South Carolina. Again, It is DHEC's position that additional time remains to object to the federal agency's consistency determination, and reserves the right to supplement this letter accordingly.


Boltin-Kelly to Colonel Hall

SHEP

January 25, 2011

Page 9

Sincerely,

A handwritten signature in cursive script that reads "Carolyn Boltin-Kelly". The signature is written in dark ink and is positioned above the typed name.

Carolyn Boltin-Kelly

cc: Earl Hunter, SCDHEC-OCRM
Barbara Neale, SCDHEC-OCRM
Heather Preston, SCDHEC-BOW
Donna Weiting, Acting Director NOAA-OCRM

RESPONSES TO SOUTH CAROLINA

DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL

OFFICE OF OCEAN AND COASTAL RESOURCE MANAGEMENT

JANUARY 25, 2011

Page 1

763-BB-28-EV01

Comment: *"The South Carolina Department of Health and Environmental Control- Office of Ocean and Coastal Resource Management (SCDHEC OCRM or DHEC or the Department) has made great efforts to review the Draft General Re-Evaluation Report (DGRR) and the Tier II Draft Environmental Impact Statement (DEIS) (collectively referred to herein as the Federal Agency Consistency Determination) for the Savannah Harbor Expansion Project within the time frame provided by your letter of January 24, 2011. However, the Department disagrees with your analysis of the timeframe that the Coastal Zone Management Act provides to the Department to provide comments."*

Response: The timeframe for a State's review of a US Army Corps of Engineers Coastal Zone Management Consistency Determination varies depending on the regulation consulted. As noted in your letter of January 25, 2011, the NOAA Regulations [15 CFR 930.41] provide a State with a 60-day review period from receipt of the Federal agency's Consistency Determination. As explained in the District's letter of January 24, 2011, the Corps of Engineers must operate under its regulations (33 CFR 336.1 et seq), which provide a 45-day review period for the States. The Corps regulations include a 15-day extension of this review period if requested by a State. When the extension is included, a 60-day review period results.

763-BB-28-EV02

Comment: *"The Department received notice of the federal agency's consistency determination on November 17, 2010. 15 C.F.R. § 930.41(a) provides the State agency 60 days from receipt of the Federal agency's consistency determination and supporting information to inform the federal agency of the state agency's concurrence with or objection to the Federal agency's consistency determination. In addition, 15 C.F.R. § 930.41(b) provides that state agency concurrence shall not be presumed in cases where the State agency, within the 60-day period, requests an extension of time to review the matter. This regulation requires the Federal agency to approve one request for an extension period of fifteen days or less, if requested, and authorizes the Federal agency to approve a longer or additional extension period as appropriate. Additionally, this regulation requires that the Federal agency should consider the magnitude and complexity of the information contained in the consistency determination when considering whether a longer or an additional extension period is appropriate. DHEC OCRM requested additional time to evaluate the project on Dec. 3, 2010 and again on January 21, 2011. Because there is*

no discretion given to the Federal Agency to deny a first request for an additional fifteen days, the federal agency may not presume state concurrence until at least seventy-five days after the State agency's receipt of notice of the federal agency's consistency determination.² Thus, DHEC has at least until January 31, 2011 to notify the Federal agency of its objection to the Federal agency's consistency determination.³ Additionally, given the magnitude and complexity of the information contained in the consistency determination, the Federal agency should grant an additional or longer period and the Department again requests that the Corps exercise its discretion and authorize the Department additional time to submit further comments on the federal agency's consistency determination. The Department believes that the 15 day extension is necessary to give the public and resource agencies the proper time to evaluate the project due to the "complexity and magnitude of the information" and the timeliness of the public notice during holiday season."

Response: The public notice announcing the availability of the Draft Environmental Impact Statement (EIS) and the General Reevaluation Report (GRR) for the Savannah Harbor Expansion Project (SHEP) was published on November 17, 2010. As required by the National Environmental Policy Act, a 45-day review period was provided with the comment-due date set at December 30, 2010. However, the District received numerous requests for a time extension. Most requests were based on the amount/complexity of material involved together with scheduling conflicts with reviewing the EIS over the Christmas and New Year's holidays. As a result, the District Commander extended the public comment period until January 25, 2011. The District received some comments after the end of the extended comment period, but they were accepted and considered in the Final EIS preparation.

Page 2

763-BB-28-EV03

Comment: *"As an initial matter, as the Federal Consistency Determination points out, the Coastal Zone Management Act, 16 U.S.C. §§ 1451, et. seq., requires that "Each federal agency activity within or outside the coastal zone that affects any land or water use or natural resource of the coastal zone shall be carried out in a manner which is consistent to the maximum extent practicable with the enforceable policies of approved state management programs." 16 U.S.C. § 1456(c)(1)(A). "Consistent to the maximum extent feasible" is defined in the Regulations promulgated by the Secretary of Commerce and means "fully consistent with the enforceable policies of management programs unless full consistency is prohibited by existing law applicable to the Federal Agency." 15 C.F.R. § 930.32(a)(1). The Regulations further provide that "if a Federal agency asserts that full consistency with the management program is prohibited, it shall clearly describe, in writing, to the State agency the statutory provisions, legislative history, or other legal authority which limits the Federal agency's discretion to be fully consistent with the enforceable policies of the management program." 15 C.F.R. 930.32(a)(2). Here, the Federal Agency has not identified in writing to the state agency any existing law which prohibits full consistency with South Carolina's approved management program. Therefore, because the federal agency has not identified to the state agency any existing laws which prohibit full consistency, the Coastal Zone Management Act's requirement that the federal agency activity be consistent to the maximum extent*

practicable requires that the Federal agency activity be fully consistent with South Carolina's approved management program."

Response: Concur. The SHEP must be fully consistent with South Carolina's approved Coastal Zone Management Program unless another statutory authority prohibits the project [or element[s] thereof] from being fully consistent. Further review of the District's initial consistency determination reveals that the project is consistent with the enforceable provisions of South Carolina's approved Coastal Zone Management Plan. Based on the comments and guidance in your January 25, 2011 response, the SHEP is fully consistent with the State of South Carolina's Coastal Zone Management Plan. This determination is based on implementing the proposed mitigation features [Mitigation- and Monitoring and Adaptive Management Plans] which would protect the resources of the State of South Carolina's coastal zone as mandated by regulation.

Page 3

763-BB-28-EV04

Comment: *"The project as proposed will not restore or enhance the resources of the state but will result in a degradation of coastal resources."*

Response: Disagree. The SHEP will not restore/enhance all of the environmental resources of the State's coastal zone. It is doubtful that many of the landscape development projects that your office reviews and approves meet that criteria. However, the SHEP does meet the primary criterion of protecting the State's coastal resources. As stated in your letter regarding the guidelines for evaluating all projects: "The extent to which the project will further the policies of the State of South General Assembly which are mandated for OCRM in implementation of its program these being: (b) to protect (underlined for emphasis) and where possible, to restore and enhance the resources of the State's coastal zone for this and succeeding generations". The SHEP meets the protection criterion since the project's design was repeatedly modified to minimize adverse impacts [to the maximum extent practicable] as well as include features to mitigate for unavoidable effects. The Monitoring- and Adaptive Management Plans detail the measures which will be implemented to protect the sensitive resources of coastal South Carolina.

763-BB-28-EV05

Comment: *"The project as proposed will reduce dissolved oxygen, and depends on mechanical means in an attempt to maintain current levels. This causes a net loss of degraded fisheries habitat."*

Response: The impacts of the SHEP on the dissolved oxygen regime in the Savannah Harbor estuary are discussed in the EIS and in greater detail in the Engineering Appendix of the GRR. Based on the potential impacts to dissolved oxygen that would be caused by implementation of the SHEP, the project's mitigation plan includes an oxygen injection system. This system has been designed to remove the incremental impacts of the SHEP on the dissolved oxygen regime in the harbor. Due to the spacing of the system, the dissolved oxygen regime would be improved in over 90 percent of the estuary, when

compared to existing conditions. The mitigation plan also includes various flow re-routing features in McCoy's Cut, Middle River, and Back River to supply that portion of the estuary with additional freshwater to reduce salinity levels. The project also includes features in the lower end of both Middle and Back River to reduce the amount of saltwater that would move up those tidal streams.

Even with the injection of oxygen and the flow diversion features of the mitigation plan, there would still be residual impacts to Shortnose sturgeon and Striped bass habitat. The Fisheries Interagency Coordination Team (of which SC DNR was a member) could not identify any mitigation features in the estuary that would be effective in replacing those lost habitats over the full range of river flow conditions. The team determined that annual funding for stocking Striped bass fingerlings and constructing a fish bypass to expand Shortnose sturgeon spawning habitat would be appropriate mitigation for their loss of habitat. The SHEP is fully consistent with this part of the South Carolina Coastal Zone Management Plan because the project provides adequate mitigation to offset its adverse effects. Additionally, implementation of the Monitoring and Adaptive Management Plan would ensure that the "critical areas" (coastal waters, tidelands) of South Carolina are protected after construction of the project is completed.

763-BB-28-EV06, 763-BB-28-EV07, 763-BB-28-EV08

Comment: *"The proposed dredging to deepen the Savannah Harbor as set forth in the National Economic Development (NED) Plan, 47-foot Depth Alternative, and the Locally Preferred (LP) Plan, 48-foot Depth Alternative, will reduce the dissolved oxygen levels in the Savannah River from the existing state in an area utilized for spawning of important fisheries species including striped bass and shortnose sturgeon (SNS). Mitigation for this impact is to stock bass fingerlings provided by Georgia DNR and construction of a fishway for Shortnose Sturgeon at the New Savannah Bluff Lock & Dam at Augusta Georgia. Stocking of fingerlings does not eliminate impacts to spawning and nursery areas for the Striped Bass and the construction of a fishway does not assure the Shortnose Sturgeon will be able to use it. In the event low DO (Dissolved Oxygen) levels fall below current concentrations, as predicted in the DEIS, the lower part of the river may not be passable by adult or juvenile sturgeon. The shallower dredging alternatives are more desirable to both the NED and LP alternatives, however all dredging alternatives (with or without mitigation) result in a net loss of Striper and SNS habitat."*

Response: Shortnose sturgeon do not spawn in the estuary, but upstream in the Savannah River well outside the project effect's area. Low dissolved oxygen levels are not a concern in these upstream habitats during the spring spawning season for this species.

The Fisheries Interagency Coordination Team (of which SC DNR was a member) identified conditions to differentiate between areas that serve as suitable and unsuitable spawning habitats for Striped bass. Dissolved oxygen levels were included in the criteria of suitable habitat for Striped bass. The project's mitigation plan includes an oxygen injection system. The system has been designed to remove the incremental impacts of the SHEP on the dissolved oxygen regime in the harbor. Due to the spacing of the system, the dissolved oxygen regime would be improved in over 90 percent of the estuary, when compared to existing conditions.

As a result, the SHEP is fully consistent with the South Carolina Coastal Zone Management Plan in that it includes effective measures to protect and maintain water quality and provides adequate offsetting mitigation for significant adverse effects. Additionally, implementation of the Monitoring and Adaptive Management Plan would ensure that important fisheries species of South Carolina are protected during and after construction of the project.

Admittedly, the SHEP's mitigation does not eliminate the impacts to Striped bass spawning habitat. However, when it is not possible to avoid an impact, mitigation is used to lessen its importance. This objective would be realized via annual stocking of Striped bass fingerlings which will ensure the continued health and viability of this fishery in the lower Savannah River.

Construction of a fish bypass at New Savannah Bluff Lock and Dam will expand the Shortnose sturgeon's spawning habitat. The adverse impacts of reservoir and other construction which blocked sturgeon's access to historical upriver spawning areas are well-documented. Once constructed, Shortnose sturgeon use of the fish way would be monitored to determine its effectiveness. Adaptive Management funds would be available to modify the structure if the monitoring indicates that is required. Other anadromous species (American shad, Atlantic sturgeon, etc.) are also likely to benefit from the fish way. Successful fish passage at New Savannah Bluff Lock and Dam would result in fish passage structures being installed at the Augusta Diversion and Stevens Creek Dams, which will allow access to even more spawning habitat for anadromous fish. Restoring access to the traditional spawning habitat above the New Savannah Bluff Lock and Dam has been a high priority of NOAA Fisheries, US Fish and Wildlife Service, and SC DNR.

Since the proposed dissolved oxygen system would restore [and marginally increase] dissolved oxygen levels in the estuary, there is no indication from the hydrodynamic and water quality model studies that the Shortnose sturgeon would not be able to use the lower reaches of the Savannah River from the standpoint of dissolved oxygen after harbor deepening.

The OCRM's preference for the project alternatives less than the 47-foot [or 48-foot] depth is acknowledged. Further, it is correct that some impacts to Striped bass and Shortnose sturgeon would remain despite extensive changes to the harbor deepening design and development of a comprehensive mitigation plan. Appendix C details why these apparent shortcomings are not significant.

Page 4

763-BB-28-EV09

Comment: *"Models described in the EIS indicate impacts to large areas of freshwater marshlands including important habitat for fish, wading birds, & waterfowl. While efforts have been addressed to minimize impacts, a minimum of 337 acres of freshwater marsh will be affected by salt waters. Mitigation for this impact is to preserve additional wetlands adjacent to the Savannah River National Wildlife Refuge. Preservation does not replace the lost values and functions of the impacted freshwater marsh."*

Response: With the exception of the 44-foot alternative, all channel depths evaluated in the SHEP would affect some of the tidal freshwater marshes (via increased salinity levels) located in the estuary. This would be the case irrespective of the proposed mitigation features (flow rerouting). However, the SHEP would not result in the actual destruction [or even degradation] of these marshes. Instead, an increase in upstream salinity levels would cause areas of tidal freshwater marsh (up to 337 acres with the 48-foot project) to transition into a brackish marsh community. Nonetheless, many of the emergent plant species associated with the tidal freshwater marsh communities would still flourish after project implementation. In fact, emergent plant species often associated with freshwater plant communities are readily observed in environments that have been defined as brackish marsh (Latham et. al., 1994).

Although the composition of tidal freshwater marshes would change with brackish marsh species becoming more prevalent, the basic wetland functions associated with these plant communities would not be materially transformed. A comparison of potential changes in wetland function after conversion of freshwater wetlands to brackish wetlands (shown in the following table) reveals there are only negligible alteration to functions such as water purification, flood protection, shoreline stabilization, groundwater recharge, stream flow maintenance, retention of particles, surface water storage, subsurface storage, nutrient cycling, and values to society.

Changes in Wetland Function as a Result of Wetland Conversion

Elements of Wetland Function	Freshwater to Brackish Marsh (Approximately 337 acres)	Saltmarsh to Brackish Marsh (Approximately 730 acres)
Water Purification	Negligible	Negligible
Flood Protection	Negligible	Negligible
Shoreline Stabilization	Negligible	Negligible
Groundwater Recharge	Negligible	Negligible
Stream flow Maintenance	Negligible	Negligible
Retention of Particles	Negligible	Negligible
Surface Water Storage	Negligible	Negligible
Subsurface Storage	Negligible	Negligible
Nutrient Cycling	Negligible	Negligible
Values to Society	Negligible	Negligible
Fish and Wildlife Habitat	Minor	Negligible

Likewise, the 48-foot depth would have a similar effect on 730 acres of saltmarsh which would also change through time into a brackish marsh. Dominant saltmarsh species like *Spartina alterniflora* would still be observed in areas which have salinities that define a brackish marsh. However, the overall basic wetland functions typically associated with these systems would not change. A comparison of potential changes in elements of wetland function for both conversion scenarios is shown in the table below.

As illustrated in the table, the only indirect effect the 48-foot project would have on the function of these wetlands systems would be associated with fish and wildlife habitat. All other elements of

wetland function associated with predicted shifts in wetlands categorization would be negligible as a result of the anticipated salinity changes. It should be noted that areas of the Savannah Harbor identified as saltmarsh or brackish marsh support similar fish and wildlife species (Jennings, 2003). Any anticipated conversion of saltmarsh to a brackish marsh system would have a negligible impact on the overall function of the wetland system. The District recognizes that a comparison of fish and wildlife habitat between freshwater and brackish marsh systems yields fewer similarities. However, the conversion in fish and wildlife habitat would still be minor when considering the total function of the wetland and continued existence of some freshwater vegetation after deepening in wetland areas that would be viewed as brackish marsh.

The Wetlands Interagency Coordination Team (which included a representative of the South Carolina Department of Natural Resources) concluded that there were no opportunities either to restore or create substantial acreages of tidal freshwater marsh in the estuary. Consequently, preservation of lands that are ecologically valuable and add to the purposes of the Savannah National Wildlife Refuge was identified as appropriate mitigation for the remaining wetland impacts. These would be properties already identified in the Savannah National Wildlife Refuge Acquisition Plan. Vegetation-wise they consist of bottomland hardwoods, maritime forest, and uplands dominated by deciduous forest and re-growth. The bottom land hardwoods are classified as palustrine forested, broad-leaved deciduous communities that are both temporarily and seasonally flooded. Preserving these areas would ensure their wildlife habitat value is protected in perpetuity. It was the consensus of the team that acquisition/preservation of these lands would serve as mitigation for reducing the only wetland function (fish and wildlife habitat value of freshwater marsh) materially changed by SHEP. It is important to observe that the subject conversion impacts to tidal freshwater marsh would only occur in the State of Georgia. With the flow diversion measures in place, the amount of tidal freshwater marsh in South Carolina should increase along the Little Back River in the vicinity of the Savannah National Wildlife Refuge.

The proposed preservation parcel[s] to mitigate for the above vegetative changes consist of 2,683 acres of bottomland hardwoods, maritime forest and uplands dominated by deciduous forest and re-growth. The bottomland hardwoods are classified as palustrine, forested, broad-leaved deciduous systems that are both temporarily and seasonally flooded. Preserving these areas would ensure wildlife habitat is protected in perpetuity. Moreover, the additional lands would buffer the SNWR from future threats of development such that changes in land use would not occur immediately adjacent to existing areas of the Refuge that do contain emergent wetland characteristics. Thus, the acquisition and preservation of 2,683 acres of wetland and upland buffer provides a functional replacement for the conversion of the only wetland function (i.e., fish and wildlife habitat) that would be expected as a result of the 337 acre freshwater to brackish marsh conversion (See table above). Thus, the functional assessment conducted for all wetland areas proposed for impact and mitigation satisfies the intent of the no-net-loss criterion.

The District made use of a Wetland Interagency Coordination Team (ICT) [consisting of technical expert representatives from USACE, Federal natural resource agencies, and State natural resource agencies representatives] to identify acceptable mitigation for the proposed project. At that time, USFWS stated that mitigation actions must be performed within the basin for impacts to the SNWR wetlands. The

Service recommended preservation as a possible solution and proposed sites that are part of its long-term acquisition strategy to compliment the SNWR. The District also consulted with the Stakeholder Evaluation Group, including its Non-governmental Organizations (NGOs) members, to identify any other suitable mitigation alternatives. Over the ten-year study period, no agency or organization could identify another feasible alternative as mitigation for impacts that would occur as a result of wetland conversion. Therefore, the District proceeded with the identification of preservation sites.

763-BB-28-EV10, 763-BB-28-EV11

Comment: *"This project will result in a very large volume of spoils that will use significant areas within the exiting spoils disposal sites, located mostly in Jasper County, resulting in shorter life expectancy of the CDF (Contained Disposal Facility). This may result in the need for additional wetland impacts for expansion of the CDF in Jasper County. Additional impacts from existing port expansions, storage, and transportation facilities associated with the port will likely result in additional impacts to wetlands and water quality. The proposed disposal of spoils in the CDF will potentially eliminate the possibility of a new port in Jasper County."*

Response: The CDFs bordering Savannah Harbor [including those in South Carolina] are designated to receive sediment dredged from the Savannah Harbor Navigation Project. The environmental impacts associated with using these sites for dredged material disposal were addressed in the Long-Term Management Strategy EIS completed in 1996. Although the US Government does not own these sites in fee, the Corps of Engineers maintains easements to permit deposition of dredged sediments. These diked CDFs have been used for dredged material disposal for many years. Their continued use for disposal is considered the least environmentally damaging option for sediment placement in Savannah Harbor. When the perimeter dikes are raised, the existing CDFs could be used beyond the 50-year project evaluation period. Using the existing CDFs for new work material excavated during harbor deepening would not markedly decrease their useful life or lead to an earlier need to locate any new CDFs.

The Georgia Department of Transportation has requested that the District relinquish its sediment disposal rights for Disposal Areas 14A and 14B, the sites presently being considered for a container terminal in Jasper County. The District is providing technical information to the Joint Project Office to identify a disposal site to replace this lost capacity for Savannah Harbor, as well as a means to replace the existing mitigation features [from previous projects] located within those Areas. The District has advised GA DOT and the Joint Project Office that it would not release the disposal easements until development of a Jasper Container Terminal is imminent, i.e. the developer obtains a Section 404 permit. The JPO's consultant observed that placing new work sediments on Areas 14A and 14B would save the terminal development project over \$200 million by raising its elevation to a workable height. Therefore, if SHEP is constructed, it would benefit the development of a container terminal in Jasper County by significantly reducing its initial construction costs.

763-BB-28-EV12

Comment: *"The proposed project will impact habitat for the federally endangered Shortnose Sturgeon. Endangered species habitat is considered GAPC in the SCCZMP. Mitigation offered to offset this impact is to construct a fishway at the New Savannah Bluff Lock & Dam. There is no certainty that the sturgeon will use this structure or that it will have any effect on spawning or survival of this species. Additionally, the project proposes a net loss of SNS habitat."*

Response: The Monitoring and Adaptive Management Plan contain provisions to monitor the success of the proposed fish bypass at the New Savannah Bluff Lock and Dam in passing Shortnose sturgeon. The structure was specifically designed to accommodate passage of this species to its historic upstream spawning habitats. Consultation with relevant natural resource agencies was conducted to ensure a state of the art design for the structure. Other than removal of the dam, none could identify a better design for the conditions at this site. During the plans and specifications phase of the project, the District will consult with the resource agencies again to finalize the design. The Adaptive Management Plan includes funds to modify the fish way in the future if that proves necessary.

763-BB-28-EV13

Comment: *"This project will have a significant impact on Striped Bass and Shortnose Sturgeon. Mitigation of these impacts is dependent on mechanical means (oxygen injection and release of fingerlings) that has not been adequately demonstrated to reduce or eliminate the impacts to water quality and fish survival."*

Response: The proposed DO system employs technology widely used in industrial settings. This long-term use has demonstrated its effectiveness in adding dissolved oxygen to all volumes of water. The Monitoring- and Adaptive Mitigation Plan provide for five years of post-construction monitoring to determine the efficiency/effectiveness of the oxygen injection system. The adaptive management plan provides the means to make any required modification to the oxygen injection system. Harbor deepening would adversely affect habitat of Shortnose sturgeon and Striped bass in the estuary. As noted above repeatedly, the proposed measures of mitigating for those impacts were deemed appropriate/acceptable by the Fisheries Interagency Coordination Team, of which SC DNR was a member. The survival of stocked Striped bass fingerlings in the Savannah River Estuary has been well documented by researchers from the University of Georgia.

Page 5

763-BB-28-EV14

Comment: *"The project as proposed will impact dissolved oxygen concentrations and finfish production. However, the DEIS states mitigation will result in a minimal net improvement. SCDHEC OCRM believes the use of mechanical oxygen injection systems may not be adequate to maintain current DO levels. Additionally, the Department has concerns regarding the maintenance and long term viability of these systems."*

763-BB-28-EV15

Comment: *"The project as proposed will effect Shortnose Sturgeon spawning, juvenile, and adult habitats. Additionally, SNS habitat will result in a net loss."*

Response: There would be a reduction in Shortnose sturgeon habitat in the estuary as a result of the project. However, the proposed fish bypass would provide access to additional upstream sturgeon spawning habitats which will more than compensate for the losses in the estuary.

763-BB-28-EV16

Comment: *"Adjoining lands owned by the state of South Carolina are currently identified as a potential site for a new ports facility. The use of this site for spoil disposal and maintenance dredge disposal will potentially eliminate the Jasper County location as a suitable location for the Ocean Terminal."*

Response: The District does not concur with the allegation that construction of the SHEP project effectively eliminates the Jasper County location as a candidate site for an ocean terminal. The District agrees with the engineering consultant to the Joint Project Office that placement of new work sediments on Areas 14A and 14B would reduce the terminal development costs by raising the site's elevation to a workable height. The District has advised GA DOT and the Joint Project Office that it would not release its disposal easements on the property until development of the Jasper Container Terminal is imminent, i.e. the developer obtains a Section 404 permit. In addition, local newspapers report the Joint Project Office agreeing that a terminal at Jasper would also require a navigation channel deeper than the present 42-foot depth.

763-BB-28-EV17

Comment: *"The proposed dredging to the depths chosen for the NED and the LP would greatly reduce habitat utilized by fisheries species, Striped Bass, as well as State and Federally listed endangered species, Shortnose Sturgeon. The shallower dredging alternatives are more desirable to both the NED and LP alternatives, however all dredging alternatives (with or without mitigation) result in a net loss of Striper and SNS habitat."*

Response: The OCRM's preference for the project alternatives less than the 47-foot [or 48-foot] depth is acknowledged. Further, it is correct that some impacts to Striped bass and Shortnose sturgeon will remain [despite extensive changes to the harbor deepening design and development of a comprehensive mitigation plan]. Appendix C of the EIS describes the mitigation that would be performed to compensate for those remaining impacts.

Page 6**763-BB-28-EV18**

Comment: *"As proposed, the project will increase the salinities within the immediate and upstream areas, causing a significant impact to the freshwater marshes."*

Response: The EIS fully discusses the impacts of the SHEP on tidal freshwater marsh in the estuary. The project includes measures to minimize impacts to tidal freshwater marsh and compensate for those impacts that cannot be avoided.

763-BB-28-EV19

Comment: *"As proposed in the DEIS, the dredging under the NEP and LP plans would negatively impact areas utilized for spawning and early development of Striped Bass. The proposed mitigation for this impact by release of hatchery raised fingerlings by Georgia DNR; however this activity does not offset the spawning or loss of essential habitat."*

Response: The Fisheries Interagency Coordination Team (which included the SC DNR) agreed that annual stocking of fingerling Striped bass in the lower Savannah River would be an appropriate mitigation technique for the loss of an increment of its spawning, egg, and larvae habitat. The fingerlings would replace juvenile fish that might not reach this life cycle stage because of SHEP's impacts on their habitat. Historically, the GA DNR-WRD stocked this species in the estuary for similar reasons. The recent growth in the Savannah River Striped bass population indicates that stocking is effective in addressing many life cycle problems. In fact, annual stocking of fingerling Striped bass would ensure that this sport fishery continues to prosper.

763-BB-28-EV20

Comment: *"As proposed dredging under the NED and LP plans, the project will further degrade the existing water quality conditions."*

Response: Disagree. The proposed project would not create stagnant water conditions, lethal fish entrapments, or deposit sumps. The use of Speece Cone injection along with other mitigation measures will improve dissolved oxygen conditions in over 90 percent of the estuary compared to existing conditions.

763-BB-28-EV21

Comment: *"The project proposes to utilize the deposition of these dredged materials to be placed into the Middle River, Rifle Cut, and the Little Back River; this deposition is for mitigating the predicted increase in salinity."*

Response: None of the material [rock, stone, and sandy sediments] used to construct the closure structures in McCoy's Cut and Rifle Cut, the sill in Middle River, and the flow diversion structure at McCoy's Cut to increase the flow of freshwater downstream or restrict the flow of saltwater upstream would be placed in wetland areas in SC. Rather, it would be placed in open water in Georgia. Materials used to construct the sill in Back River (in open water) would be deposited in ways that do not allow their dispersal into wetland area.

763-BB-28-EV22

Comment: *"The proposed deepening under the NED and LP plans result in a negative impact to areas of important resources for fisheries and wildlife. The shallower dredging alternatives are more desirable to both the NED and LP alternatives. Additionally, a demonstrated public need for the citizens of South Carolina has not been sufficiently demonstrated. Also, SCDHEC OCRM believes there may be other feasible alternatives that should be explored."*

Response: Navigation studies undertaken by the US Army Corps of Engineers evaluate the benefits of a proposed project from a national perspective and do not focus on an individual state [or even region] when selecting the National Economic Development Plan. The SHEP evaluated a full range of alternatives and determined that deepening of Savannah Harbor to allow vessels to use it without light loading and/or tidal constraints is in the national interest. The screening of potential management measures to address the identified navigation needs is contained in Appendix O of the EIS. The majority of the construction activities and the environmental impacts would occur within the State of Georgia.

763-BB-28-EV23

Comment: *"The measures proposed to mitigate for the predicted increase in salinity are to close Rifle Cut and Little Back River. These alterations would result in a loss of navigable waters by the public in these two water bodies."*

Response: Disagree. The public would not lose access to navigable waters as a result of the proposed mitigation features. Closures would occur at Rifle Cut (a man-made passage in Georgia) and the western end of McCoys Cut (South Carolina). Both of these areas are within the Savannah National Wildlife Refuge and are not used by commercial traffic. Closing Rifle Cut would lengthen the transit of recreational boaters using the existing boat ramp at the Houlihan Bridge who travel to Back River. Constructing a new boat ramp on Hutchinson Island would provide more direct access to Back River for recreational boaters and addresses this issue (Appendix C-Figure 46). Chatham County would be given the ramp and operate the facility in perpetuity. The project does not include any closure structures on Little Back River.

Page 7

763-BB-28-EV24

Comment: *"The project proposed to close off Rifle Cut and Little Back River to reduce the potential effects of increased salinity. This proposed activity would restrict the continued use of these water bodies as recreational open areas. The Department believes that other alternatives exist aside from the closure of Rifle Cut and Little Back River."*

Response: Disagree. Extensive modeling of the Savannah Harbor was conducted to determine the most practicable means of avoiding/minimizing aquatic impacts to the maximum extent practicable while still achieving the project's purpose and need. Ultimately, implementation of flow routing measures proved to be the best way to achieve this objective [especially minimization of wetland impacts - see Appendix

C]. Closing the western end of McCoys Cut is designed to bring more freshwater into Little Back and Middle Rivers while closing Rifle Cut would reduce the amount of salty water entering Little Back River via Middle River. Without the flow alteration structures, approximately 1,212 acres of freshwater marsh would be converted to brackish marsh by the 48-foot SHEP project. By implementing flow-routing measure 6A, only 337 acres of freshwater marsh would be similarly converted. Thus, flow routing measure 6A satisfies both avoidance and minimization elements by maintaining 875 acres of freshwater marsh that would otherwise experience some degree of vegetative succession. Waters in the vicinity of the flow diversion structures would still be available for recreational use.

763-BB-28-EV25, 763-BB-28-EV26

Comment: *"The project as proposed in the preferred LP alternative will impact 1212 acres of freshwater marsh through the introduction of more saline waters. While mitigation is proposed to offset these impacts, there are other feasible alternatives to further minimize the proposed impacts. All other dredging alternatives result in a net loss of freshwater wetlands and saltmarsh, even with mitigation, except for the 44 foot dredge alternative. The 44 foot dredge alternative will result in the net gain of 332 acres of freshwater marsh due to the conversion of brackish wetlands. Additionally, there is no overriding public interest for the citizens of the State of South Carolina in this project. As proposed, all of the benefits from the deepening of the Savannah Harbor will be accrued to the State of Georgia, while the majority of the ecological impacts will occur within the State of South Carolina."*

Response: Disagree. Navigation studies undertaken by the US Army Corps of Engineers evaluate the benefits of a proposed project from a national perspective and do not focus on an individual state [or even region] when selecting the National Economic Development Plan. The SHEP evaluated a full range of alternatives and determined that deepening of Savannah Harbor to allow vessels to use it without light loading and/or tidal constraints is in the national interest. The screening of potential management measures to address the identified navigation needs is contained in Appendix O of the EIS. The majority of the construction activities and the environmental impacts would occur within the State of Georgia.

Page 8

763-BB-28-EV27

Comment: *"Several of the above cited policies require a demonstration of no feasible alternatives. The Federal Consistency Determination does not sufficiently demonstrate that there are no feasible alternatives. South Carolina's coastal zone management program defines "Feasible" as used in the Coastal Management Program in the context of "unless no feasible alternative exists." "Feasibility is determined by [DHEC OCRM] with respect to individual project proposals. Feasibility in each case is based on the best available information, including technical input from relevant agencies with expertise in the subject area, and considering factors of environmental, economic, social, legal, and technological suitability of the proposed activity and its alternatives. Use of this word includes the concept of reasonableness and likelihood of success in achieving the project goal or purpose. "Feasible alternative" applies both to locations or sites and to methods of design or construction, and includes the no action*

alternative.” Here, the Federal Consistency Determination relies on its determination that adverse impacts will be mitigated. Though the CMP requires that unavoidable impacts be mitigated, there must first be a demonstration of no feasible alternatives/unavoidability. While the Federal Consistency Determination states that there are no feasible alternatives, it does so in a conclusory fashion and does not demonstrate why the other alternatives are not feasible. The Federal Consistency Determination does not consider other locations but only looks at methods for this location. In addition, its conclusion that the no action alternative and other alternatives are not feasible is conclusory and therefore is inadequate as a matter of law.”

Response: The SHEP was initiated based on a known problem — the larger vessels that use Savannah Harbor are constrained by draft because of the existing controlling depth of -42 feet mlw. Those vessels must either light load and/or wait for high tide to safely navigate the harbor. This situation will become even more of an issue once the larger Post-Panamax ships begin replacing older, smaller vessels. The screening of potential management measures to address the identified navigation needs is contained in Appendix O of the EIS. Based on problem identification, the SHEP looked at the benefits and associated environmental impacts of constructing a deeper harbor to either 44, 45, 46, 47, or 48 feet mlw. Increasing the controlling depth in Savannah Harbor is the best alternative to solve the identified problems.

763-BB-28-EV28

Comment: *“Based upon the above SCDHEC OCRM does not concur that the five dredging alternatives are consistent with the South Carolina Coastal Management Program (SCCMP) to the maximum extent practicable because it would result in the permanent alteration of productive freshwater marshlands, a net loss in spawning and juvenile habitat for Striped bass and SNS (T&E listed species) and degradation of water quality due to a reduction in dissolved oxygen. The DEIS has not adequately demonstrated that no feasible alternatives exist since other alternatives such as the potential location of the Jasper County Ocean Terminal were not considered. In addition, the DEIS fails to demonstrate an overriding public interest for the citizens of South Carolina. Again, It is DHEC’s position that additional time remains to object to the federal agency’s consistency determination, and reserves the right to supplement this letter accordingly.”*

Response: As with any water resource development project having a landscape scope, the SHEP will have adverse impacts on the environment. Harbor deepening was evaluated from an impact and mitigation standpoint using the standard process which is (1) avoid impacts where possible (maintaining the existing side slopes of the channel to avoid additional wetland impacts), (2) minimize impacts that cannot be avoided (flow rerouting measures to reduce upstream salinity levels) and (3) compensate for the remaining impacts. Based on this evaluation process, the Mitigation- and Monitoring and Adaptive Management Plan provide appropriate compensation for the remaining impacts of the project in regards to direct wetland impacts, indirect impacts to tidal freshwater marsh, dissolved oxygen, Striped bass, and Shortnose sturgeon. The mitigation measures for these resources have been discussed in previous responses.

The screening of potential management measures and development of alternatives to address Savannah's identified navigation needs are contained in Appendix O of the EIS. A port facility in Jasper County was one of the early alternative terminal locations that the District evaluated. The District found that deepening to the presently-proposed site and its subsequent development into a port facility was less cost effective than deepening up to the existing Garden City Terminal.

Navigation studies undertaken by the US Army Corps of Engineers evaluate the benefits of a proposed project from a national perspective and do not focus on an individual state [or even region] when selecting the National Economic Development Plan. The SHEP evaluated a full range of alternatives and determined that deepening of Savannah Harbor to allow vessels to use it without light loading and/or tidal constraints is in the national interest.

Enclosure 2



January 31, 2011

Colonel Jeffrey M. Hall, District Commander
U.S. Army Corps of Engineers, Savannah District
P.O. Box 889
Savannah, Georgia 31402-0889

Re: Savannah Harbor Expansion Project: Draft General Re-Evaluation Report and Draft Tier II Environmental Impact Statement

Dear Colonel Hall:

The South Carolina Department of Health and Environmental Control- Office of Ocean and Coastal Resource Management (SCDHEC OCRM) offers the following supplemental comments to our January 25, 2011 letter on the Draft General Re-Evaluation Report (DGRR) and the Tier II Draft Environmental Impact Statement (DEIS) for the Savannah Harbor Expansion Project. As stated previously SCDHEC-OCRM maintains that the time period allowed for the State to comment on this direct federal activity is a total of 75 days. Therefore, SCDHEC-OCRM maintains that the close of the comment period is close of business January 31, 2011.

Chapter IV Special Management Areas

A. Geographic Areas of Particular Concern (GAPC)

- (8)(c) Areas of Historic, Archeological or Cultural Significance: The extent and significance of negative impacts on Geographic Areas of Particular Concern (GAPCs). The determination of negative impacts will be made by OCRM in each case with reference to the priorities of use for the particular GAPC. Applications which would significantly impact a GAPC will not be approved or certified unless there are no feasible alternatives or an overriding public interest can be demonstrated, and any substantial environmental impact is minimized.

The proposed project may potentially impact archeological resources which are potentially eligible, eligible or listed on the National Register. Specifically, two anomalies within SC waters between Stations 41+500 – 49+500, two confederate crib obstructions within GA and SC waters between stations 55+000 – 68+500 and the CSS Georgia. SCDHEC OCRM staff has coordinated with the South Carolina Department of Archives and History (SHPO) and re-enforce their concerns in a letter to you dated December 7, 2010. SCDHEC OCRM has the responsibility to consider the impacts to the extent to which the proposed project will have on these resources.


Ocean and Coastal Resource Management

Charleston Office • 1302 McMillan Avenue • Suite 100 • Charleston, SC 29405 • Phone: (843) 953-0200 • Fax: (843) 953-0201 • www.scdhec.gov

Boltin-Kelly to Colonel Hall
SHEP
January 31, 2011

SCDHEC OCRM does not concur that the five dredging alternatives are consistent with the South Carolina Coastal Management Program (SCCMP) to the maximum extent practicable because it will potentially result in the adverse impact to GAPCs. However, SCDHEC-OCRM could find this aspect of the federal activity consistent if properly mitigated to SHPOs satisfaction.

Sincerely,

A handwritten signature in cursive script that reads "Carolyn Boltin-Kelly".

Carolyn Boltin-Kelly

cc: Earl Hunter, SCDHEC-OCRM
Barbara Neale, SCDHEC-OCRM
Heather Preston, SCDHEC-BOW
Donna Weiting, Acting Director NOAA-OCRM

RESPONSES TO SOUTH CAROLINA

DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL

OFFICE OF OCEAN AND COASTAL RESOURCE MANAGEMENT

JANUARY 31, 2011

Page 1

1116-BB-02-EV01

Comment: *"The proposed project may potentially impact archeological resources which are potentially eligible, eligible or listed on the National Register. Specifically, two anomalies within SC waters between Stations 41+500 – 49+500, two confederate crib obstructions within GA and SC waters between stations 55+000 – 68+500 and the CSS Georgia. SCDHEC OCRM staff has coordinated with the South Carolina Department of Archives and History (SHPO) and re-enforce their concerns in a letter to you dated December 7, 2010. SCDHEC OCRM has the responsibility to consider the impacts to the extent to which the proposed project will have on these resources."*

Response: Based on the District's recent coordination (February 2011) with the South Carolina State Historic Preservation Office, it is satisfied with the Programmatic Agreement and has no outstanding concerns regarding the proposed SHEP.

Page 2

1116-BB-02-EV02

Comment: *"SCDHEC OCRM does not concur that the five dredging alternatives are consistent with the South Carolina Coastal Management Program (SCCMP) to the maximum extent practicable because it will potentially result in the adverse impact to GAPCs. However, SCDHEC-OCRM could find this aspect of the federal activity consistent if properly mitigated to SHPOs satisfaction."*

Response: Based on the District's recent coordination (February 2011) with the South Carolina State Historic Preservation Office, it is satisfied with the Programmatic Agreement and has no outstanding concerns regarding the proposed SHEP. The SHPO has indicated that the proposed mitigation presented in the report is acceptable.



DEPARTMENT OF THE ARMY
SAVANNAH DISTRICT, CORPS OF ENGINEERS
100 W. OGLETHORPE AVENUE
SAVANNAH, GEORGIA 31401-3640

REPLY TO
ATTENTION OF:

Planning Division

MAR 30 2011

Mr. J. Christopher Beckham
Water Quality Certification
and Wetlands Section
South Carolina Department of Health
and Environmental Control
2600 Bull Street
Columbia, South Carolina 29201

Dear Mr. Beckham:

I refer to the March 3, 2011 letter from South Carolina Department of Health and Environmental Control (SC DHEC) concerning the Savannah Harbor Expansion Project (SHEP) and our November 15, 2010 application for Water Quality Certification pursuant to Section 401 of the Clean Water Act. In the letter, you strongly recommended the US Army Corps of Engineers (Corps) withdraw its application and address issues outlined in the letter.

Enclosed, you will find a comment/response document that addresses the issues you raised and provides the information requested. Based on the contents of your letter, it is our understanding that upon receiving concurrence of the project from US Fish and Wildlife Service and National Marine Fisheries Service, SC DHEC would be satisfied with the proposed project's mitigation for impacts to fish, wildlife, and the Savannah National Wildlife Refuge.


With regard to payment of application fees and completion date of the requested action, SC DHEC has not traditionally charged the Corps for water quality certifications and we look forward to receiving the same courtesy on this request.

The Corps believes that the issues and concerns outlined in your March 3, 2011 letter were adequately addressed in the draft reports provided in November 2010. Construction of the SHEP and its proposed mitigation features would not adversely affect the dissolved oxygen regime in South Carolina waters, nor would it adversely affect tidal freshwater wetlands or endangered species habitat in South Carolina waters. Consequently, the Corps looks forward to South Carolina issuing its Section 401 Water Certification for the Savannah Harbor Expansion Project.

We appreciate your continued support of the Corps' efforts to establish and maintain navigable waterways for the benefit of national commerce.

If you have any questions or concerns regarding the contents of this letter, please do not hesitate to contact me at (912) 652-5781.

Sincerely,

A handwritten signature in black ink that reads "William G. Bailey". The signature is written in a cursive style with a large, stylized "W" and "B".

William G. Bailey
Chief, Planning Division

Enclosure

US ARMY CORPS OF ENGINEERS, SAVANNAH DISTRICT

RESPONSES TO SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL

LETTER DATED 3 MARCH 2011

Comment. *Although the document considers some alternatives, this analysis does not thoroughly evaluate all feasible alternatives for a project of this magnitude. For example, it seems reasonable to consider alternatives on a regional basis for such a large-scale project involving significant environmental impacts. The GRR and EIS do not consider whether or not other southeastern ports could be expanded with less cost or environmental impacts.*

Response. The Corps conducted a Regional Port Analysis and a Multiport Analysis as discussed on Page 3-3 of the DEIS and Pages 117-119 of the GRR, respectively. The full reports are included as attachments to the Economic Appendix of the GRR. The regional port analysis indicated that (1) the volume of Twenty-foot Equivalent Units (TEUs) expected to move through the southeastern US ports in the future exceeds the total capacity of any US east coast port; (2) USACE participation in planning and construction of a regional port would require Congressional authorization and a non-Federal sponsor; (3) there is no centralized planning jurisdiction that would encourage development of a regional port hub and discourage competitive development of local ports; and (4) local port planning and development is already underway (Savannah, Charleston, Jacksonville, Norfolk, Cape Fear) which would make a regional port redundant. For the foregoing reasons, the District determined that further evaluation of a single regional port is not warranted for the Savannah Harbor Expansion Project.

Comment. *For these reasons, the establishment of a Jasper Port Terminal should be given detailed consideration as an option to the extensive cost and environmental impacts associated with the proposed expansion of the Garden City Terminal. The Department cannot meet its obligation under Regulation 61-101 by issuing a certification without a thorough investigation of all feasible alternatives. It is recommended that the alternatives analysis be amended to include the evaluation of all feasible alternatives to the proposed project.*

Response. The SHEP EIS and GRR do not evaluate the environmental aspects of the expected future expansion of the Garden City Terminal. The District expects GPA to increase the throughput capability of that terminal in response to future demand independent of a harbor deepening. The SHEP EIS and GRR were prepared as directed by the US Congress to address the identified inefficiencies of the current operation of *Savannah Harbor*. In Section 3.1 of the GRR, the Corps identified the present navigation inefficiencies:

1. Increased/ inflated operations costs due to light loading and tidal delays;
2. Light loading and tidal delays will increase as present harbor users increase their annual tonnage and as larger, more efficient ships replace older, smaller ones;

3. Existing ships are experiencing problems associated with turning capabilities and overall maneuverability in certain reaches of the inner harbor;
4. The severity of problems associated with turning capabilities and overall maneuverability in certain reaches of the inner harbor will increase as vessel size increases.

Some of these situations are expected to worsen in the near future as larger, Post-Panamax Generation 2 vessels begin to replace older, smaller vessels.

Alternative container terminal locations were thoroughly evaluated in the EIS and GRR (Chapter 3 and Appendix O (Formulation of Alternatives) of the EIS). This analysis considered methods in which the harbor's navigation problems could be reduced, including structural and non-structural methods. The structural methods included providing a deep-water channel to alternate terminal locations, four of which were in South Carolina. This analysis included a new marine container terminal at the harbor's present confined dredged material disposal facilities (CDFs) 12A, 14A, 14B, and at Jones/Oysterbed Island. The CDF 14A and 14B sites are the ones presently under consideration for a Jasper Ocean Terminal. The analysis concluded that the Garden City Terminal of the Georgia Ports Authority best met the criteria of Completeness, Effectiveness, Efficiency, and Acceptability. Consequently, the Corps concluded that the detailed studies would concentrate on evaluating the feasibility of various channel depth alternatives (42 feet to 48 feet) to the Garden City Terminal. The project's Cooperating Agencies (US Environmental Protection Agency (EPA), US Fish and Wildlife Service (USFWS), National Oceanic and Atmospheric Administration National Marine Fisheries Service (NOAA Fisheries), and the Georgia Ports Authority) concurred in this finding. The Corps provided that analysis to your agency and the public in 2005; you provided no comments.

The Corps' analysis concluded that construction of a container terminal in Jasper County and deepening to that facility is not the best alternative to solve the existing navigation problems in Savannah Harbor. A series of sensitivity analyses (Pages 224-229 of the GRR) were conducted to identify the potential impact that a new terminal in Jasper County might have on the justification to deepen Savannah Harbor to the Garden City Terminal. This analysis showed that economic justification for deepening the channel between a Jasper County terminal and the Garden City Terminal is not particularly sensitive to the development of a container terminal in Jasper County. Rather, the proposed harbor deepening has independent utility apart from the potential Jasper County terminal. In other words, even if a container terminal in Jasper County was already constructed and operational, deepening the channel to the Garden City Terminal would still be economically justified.

Capital improvements at the Garden City Terminal have occurred in the past and the Corps expects GPA to continue to take similar actions in the future in response to increases in container traffic volumes through that facility. The Corps expects those increases in container volumes to occur with or without SHEP.

Comment. *After evaluating the DO modeling data and the mitigation proposal outlined in the GRR and EIS, the Department is concerned with the uncertainty relating to the use of mechanical injection as mitigation for the DO impacts, especially in the shallow areas of the Back River. The Corps is relying entirely on modeling data to support the conclusion that the Speece cones will adequately restore DO in the river system to pre-project conditions. Furthermore, the oxygen injection system is a costly method to mitigate for the projected impacts, and the funding for the long-term operational costs depends on unpredictable annual appropriations. Until the uncertainty from the DO impacts and mitigation has been thoroughly investigated, and reasonable assurance is provided that the project will protect existing uses and water quality standards for the life of the project, the Department cannot find the project consistent with the requirements of 61-101.*

Response. The models employed in the analysis of the impacts of the SHEP on the dissolved oxygen regime in Savannah Harbor were developed over a number of years by subject matter experts with integrated input from the Cooperating Agencies and the state resource agencies (including SC DHEC) to ensure the results are meaningful and accurate. While all models have uncertainty, the SHEP hydrodynamic and water quality models are the best prediction tool available to understand future conditions in the harbor under various scenarios. In 2006, your agency approved the use of those models on this project. In 2010, your agency concurred in use of these basic models in EPA's Revised Draft Total Maximum Daily Load (TMDL) for Dissolved Oxygen in Savannah Harbor.

The Corps used the same models to design the oxygen injection systems as it did to identify the impacts expected from the proposed project. There should be no difference in uncertainty about the effectiveness of the proposed mitigation from that for the impacts from the harbor deepening alternatives. The Corps remains confident that the flow diversion measures and the dissolved oxygen injection system would remove the incremental effects of SHEP on the dissolved oxygen regime in Savannah Harbor. In fact, when the dissolved oxygen injection system is operational, the dissolved oxygen regime is expected to improve in over 90 percent of the estuary over the without project condition.

Comment. *Section F.(5)(a) of Regulation 61-101 states that certification will be denied if the proposed activity alters the ecosystem in the vicinity of the project such that its functions and values are eliminated or impaired. The mitigation proposal submitted in the GRR and EIS fails to give reasonable assurance that the ecosystem will not be permanently impaired by the extensive wetland impacts from salinity intrusion. The preservation component of the mitigation plan lists several properties that would be acquired and subsequently placed under control of the SNWR. Although the EIS states these properties contain desirable ecological resources, the amount of wetland acreage or type of wetlands contained in these properties was not included in the EIS. In addition, the mitigation credit taken by the Corps for restoration includes the creation of 1,068 acres of brackish marsh for the 48 ft depth alternative. The flow altering structures will reduce salinities in some of the marsh areas; however, these structures will cause the conversion of salt and freshwater marsh to brackish marsh. The loss of any type of marsh should be considered an impact. Given the extensive loss of existing freshwater marsh within the*

ecosystem and the lack of an appropriate mitigation plan, the Department cannot certify that this project complies with the mandates in Regulations 61-101 and 61-68.

Response. It is important to note that installation of the flow diversion structures would not result in the conversion of any freshwater marsh to brackish marsh in South Carolina. On the contrary, the diversion of flow would reduce the upstream movement of salinity in Middle River and Little Back River from harbor deepening, thereby minimizing impacts to tidal freshwater marsh in South Carolina. On the other hand, flow diversion would result in the conversion of some saltmarsh located in the lower ends of these two streams to more brackish species, which the USFWS identified as being more ecologically valuable.

Upstream salinity increases resulting from construction of the SHEP would not eliminate the functions of any wetland. Construction of the 48-foot channel (with flow diversion) would result in the conversion of the dominant vegetative species typically observed in approximately 337 acres (net) of freshwater marsh to more brackish species. It is important to note that many of the emergent plant species associated with this freshwater marsh system would still be readily observed in the brackish environment (Latham et. al., 1994). Likewise, the 48-foot depth (with flow diversion) would result in a conversion of the dominant vegetative species typically observed in 730 acres (net) of saltmarsh to more brackish species. However, dominant saltmarsh species like *Spartina alterniflora* are still expected to be observed in those areas. While the SHEP would result in changes to the dominant wetland vegetation, the overall basic wetland functions typically associated with these systems would not change.

A review of the changes that occur to the elements of wetland functions (water purification, groundwater recharge, streamflow maintenance, fish and wildlife habitat, etc.) when freshwater marsh is converted to more a brackish marsh indicates that there are only negligible changes to these functions with the exception of fish and wildlife habitat. The wetland conversion is classified as a minor effect when considering the total function of the wetland and the continued existence of some freshwater vegetation in the areas that would become brackish marsh.

The proposed preservation lands consist of 2,683 acres (for the 48-foot channel) characterized by bottomland hardwoods, maritime forest and dispersed uplands dominated by deciduous forest and regrowth. These bottomland hardwoods are classified as palustrine, forested, broad-leaved deciduous systems that are both temporarily and seasonally flooded. Preserving these areas would ensure wildlife habitat is protected in perpetuity. The USFWS had previously identified those tracts as potentially being valuable additions to the Savannah National Wildlife Refuge (SNWR). Those lands would buffer the SNWR from future threats of development such that changes in land use would not occur immediately adjacent to existing areas of emergent wetlands within the Refuge. Thus, the acquisition and preservation of 2,683 acres of wetland and upland buffer would provide a functional replacement for the reduction in the only wetland function (i.e., fish and wildlife habitat) that would be expected to be impacted from the 337 acre freshwater to brackish marsh conversion. Consequently, the Corps believes the proposed mitigation satisfies the no-net loss of wetland function criterion.

Modeling indicates that the expected conversion of tidal freshwater marsh to brackish marsh would occur within the waters of the State of Georgia. That conversion would be confined to areas of Middle River and Front River from just below the Georgia Highway 25 crossing to just upstream of the confluence of Front River and Steamboat River. Those model studies indicate that there would be an increase in tidal freshwater marshes in the State of South Carolina in marshes associated with Little Back River in the vicinity of the SNWR intake on Little Back River.

Comment. *Regulation 61-101 states that certification will be denied if the proposed activity impacts special or unique habitat. The SNWR is considered a unique area, as such, the Department cannot issue a certification for the proposed activity unless the United States Fish and Wildlife Service (USFWS) gives concurrence that this project will not cause adverse impacts to the SNWR.*

Response. The adverse impacts of the SHEP on the SNWR are readily acknowledged and addressed in the DEIS and the GRR. Specifically, there will be direct impacts to marsh caused by excavation to expand the Kings Island Turning Basin and indirect impacts to tidal freshwater marsh caused by an increase in upstream salinity levels. Plans to minimize and mitigate those adverse impacts are also addressed. Mitigation includes restoring 28 acres of saltwater marsh, constructing flow diversion measures to reduce salinity levels in upstream areas where tidal freshwater marsh would be impacted, and purchasing and preserving lands that would be beneficial to the SNWR. The Corps believes that the SHEP Mitigation Plan adequately addresses adverse impacts to the SNWR. Also, all of the described adverse impacts to the SNWR occur in the State of Georgia. Construction of the SHEP would not adversely affect any unique areas in the State of South Carolina.

Comment. *The proposed deepening will occur in waters containing Federally recognized threatened or endangered species. Species such as Shortnose sturgeon, Atlantic sturgeon various sea turtles and West Indian manatees may all be impacted by the project. The loss of a significant portion of Shortnose sturgeon habitat due to lower DO levels and salinity intrusion is of particular concern. Regulation 61-101 states in Section 5(c) that certification will be denied if the project adversely impacts waters containing state or Federally recognized rare, threatened, or endangered species. Although the Corps proposes to mitigate for the loss of Shortnose sturgeon habitat by installing fish passage at the Savannah Bluff Lock and Dam, it is not known if this measure will adequately mitigate for the impacts to sturgeon. Endangered species impacts are typically evaluated by resource agencies such as the USFWS and the National Marine Fisheries Service (NMFS). Without concurrence from these agencies that the project will not cause adverse impacts to threatened or endangered species, the Department cannot certify this project.*

Response. The modeling studies presented in the DEIS indicate that approximately 11.0% (439 acres) of Shortnose sturgeon adult winter habitat, 8.2% (113.0 acres) of adult summer habitat, and 1.6% (21.6 acres) of juvenile winter habitat would be adversely affected by the 48-foot alternative. There would be no loss of Shortnose sturgeon habitat in South Carolina waters for any of the alternative harbor depths.

analyzed. Loss of Shortnose sturgeon habitat due to SHEP would mainly occur in portions of Front River just above the Georgia Highway 25 crossing and in a small portion of Middle River near its confluence with Front River. Modeling results indicate that implementation of the SHEP with its mitigation features would result in a slight increase in Shortnose sturgeon habitat in South Carolina waters.

The proposed fishway at the New Savannah Bluff Lock and Dam was included in the mitigation plan for the project to ameliorate the remaining effects of Shortnose sturgeon habitat after the Corps and the natural resource agencies were unable to identify any measures that could be implemented in the estuary to restore sturgeon habitat or enhance existing habitat. The horseshoe rock ramp design is the current state-of-the-art measure that could be constructed at the New Savannah Bluff Lock and Dam to allow Shortnose sturgeon and other species of anadromous fish an opportunity to bypass the dam and gain access to traditional upstream spawning areas.

As required, the Corps prepared a Biological Assessment of Threatened and Endangered Species (BATES) which was included in the DEIS as Appendix B. The BATES concluded that the project may affect but is not likely to adversely affect the wood stork, Piping plover, manatee, North Atlantic right whales, humpback or sperm whales, leatherback turtles, loggerhead turtles, kemp's ridley turtles, hawksbill turtles, and green sea turtles or their critical habitats. The BATES concluded that the SHEP may affect but is not likely to adversely affect Shortnose or Atlantic sturgeon or their critical habitat.

The BATES has been furnished to the USFWS and the NMFS for their review and Biological Opinion. NMFS is the agency that oversees compliance with the Endangered Species Act for Shortnose sturgeon.

Comment: *In addition to the above list of concerns about the proposed project, the Department has not received a complete response to our previous request for information. On November 23, 2010, the Department sent a letter requesting an affidavit of public notice for the project, a list of adjacent property owners, and the application fee of \$1,000.00. We received the affidavit and list of property owners, but we have not received the requested fee.*

Response. South Carolina DHEC has not traditionally charged the Corps for water quality certifications and we look forward to receiving the same courtesy with this request.

Comment. *As currently proposed, this project does not meet the requirements for issuance of a Water Quality Certification pursuant to Section 401 of the Clean Water Act, 33 U.S.C. Section 1341, and the requirements of State Regulation 61-101, Water Quality Certification. It is strongly recommended that the Corps withdraw the current application and address the issues outlined in this letter before continuing the 401 Certification process. If the Corps determines that it is necessary to move forward with a certification decision at this time, the fee should be submitted as soon as possible.*

Response. The Corps believes that the issues and concerns outlined in your March 3, 2011 letter were adequately addressed in the draft reports provided in November 2010. Construction of the SHEP and its proposed mitigation features would not adversely affect the dissolved oxygen regime in South Carolina waters nor would it adversely affect tidal freshwater wetlands or endangered species habitat in South Carolina waters. Consequently, the Corps looks forward to South Carolina issuing its Section 401 Water Certification for the Savannah Harbor Expansion Project.

Bailey, William G SAS

From: Bailey, William G SAS
Sent: Thursday, April 21, 2011 5:56 PM
To: 'Rheta Geddings DiNovo'
Cc: 'boltincr@dhec.sc.gov'; 'pontifmj@dhec.sc.gov'; 'Barbara Neale'; 'Blair N. Williams'; 'churdabd@dhec.sc.gov'; 'whitfcd@dhec.sc.gov'; Hall, Jeffrey M COL SAS; Oddi, Peter A SAS; Sloan, G Rogers SAS; Saltalamachea, Michael H SAS; King, Jeffrey K. SAS; McIntosh, Margaret (Mackie) SAS; Okane, Jason D SAS
Subject: Savannah Harbor Expansion (UNCLASSIFIED)
Attachments: EPA Agency Letter and Responses.pdf; NOAA Agency Letter and Responses.pdf; NMFS Agency Letter and Responses.pdf; DOI Agency Letter and Responses.pdf; Direct Impacts to Marsh.docx; SC SHPO Comments.pdf

Classification: UNCLASSIFIED

Caveats: NONE

We appreciate the time that you and the rest of the OCRM management took to meet with us today. We trust we were able to better explain some items that we had tried to describe in our DEIS.

You asked for some additional pieces of information. I've attached the following items:

- Draft responses to EPA comments
- Draft responses to Department of Commerce comments
- Draft responses to Department of Interior comments
- Comments from SC SHPO
- Updated table of wetland impacts

It will take us a little time to prepare the figures you requested:

- Salinity under various conditions (existing, with deepening, with deepening and mitigation (flow rerouting))
- Wetland areas with direct and indirect impacts
- Wetland areas benefitting from flow rerouting

We will send these as soon as we complete them.

We will also soon send along (1) our expanded description of how the project complies with the Mitigation Rule, and (2) figures showing the sites we propose to acquire and preserve.

Please feel free to email me if you have additional questions.

Bill Bailey
 Chief, Planning Division
 Savannah District
 US Army Corps of Engineers

Classification: UNCLASSIFIED

Caveats: NONE

Bailey, William G SAS

From: Bailey, William G SAS
Sent: Friday, May 13, 2011 2:29 PM
To: 'Blair N. Williams'; 'J. Christopher Beckham'
Cc: 'Rheta Geddings DiNovo'; 'pontifmj@dhec.sc.gov'; 'Barbara Neale'; 'Heather Preston'; 'hightocw@dhec.sc.gov'; Okane, Jason D SAS; McIntosh, Margaret (Mackie) SAS; Hall, Jeffrey M COL SAS; Oddi, Peter A SAS; Sloan, G Rogers SAS; Saitalamachea, Michael H SAS
Subject: Savannah Harbor Expansion Project -- additional information (UNCLASSIFIED)
Attachments: SHEP direct wetland impacts.pdf; SHEP indirect wetland impacts.pdf; SHEP VII Consideration of Final Mitigation Rule.pdf

Classification: UNCLASSIFIED
 Caveats: NONE

At our 25 April meeting, you requested we provide specific additional information. We have completed our write-up (attached) that describes how the wetland mitigation plan complies with the Mitigation Rule. We intend to include this information in one of the appendices of the Final EIS. This information may still be revised as our documents are reviewed by higher headquarters. We consider this information to be Pre-Decisional. It will become public information when we release the General Re-evaluation report and Environmental Impact Statement to the public for comment.

You requested some additional figures on wetlands, which we now have available. The figures use the same modeling information that was in the November 2010 Draft GRR and Draft EIS, but displays it in a different way, which we trust will be more useful to you. I have attached figures that show the direct and indirect impacts to wetlands. The figures also show the wetland areas that would benefit from the flow rerouting.

You also requested figures showing salinity under various conditions (existing, with deepening, with deepening and mitigation (flow rerouting)). Those figures result in a file that is too large to send by email, so we are putting a CD with them in the mail today; you should receive it next week. These figures also use the same modeling information that was in the November 2010 Draft GRR and Draft EIS.

We met with members of the DHEC staff in Columbia yesterday to discuss water quality certification issues and they had some of the same questions that you did, so I am including them on this email. We will also send them a copy of the CD, as well.

We believe this is all the information that OCRM requested at our 25 April meeting. After you receive the CD and have a chance to look it over, please let me know by 25 May if you need any other information before your agency can reach its decisions on this project.

William Bailey
 Chief, Planning Division

Classification: UNCLASSIFIED
 Caveats: NONE


Savannah Harbor Expansion Project

Freshwater Tidal Wetland Impacts

Marsh contours are generalized and are based on model predictions using average freshwater river flows and tidal conditions.

In all figures, the blue line represents Existing Conditions (i.e. existing location of freshwater marsh contour). Marsh located north of the blue line are considered freshwater tidal marsh and areas south, or closer to the ocean, are considered to be brackish with adjacent river salinities greater than 0.5 ppt.

For greater detail and more information on model simulations and wetland impact determination see the SHEP Draft EIS and GRR.

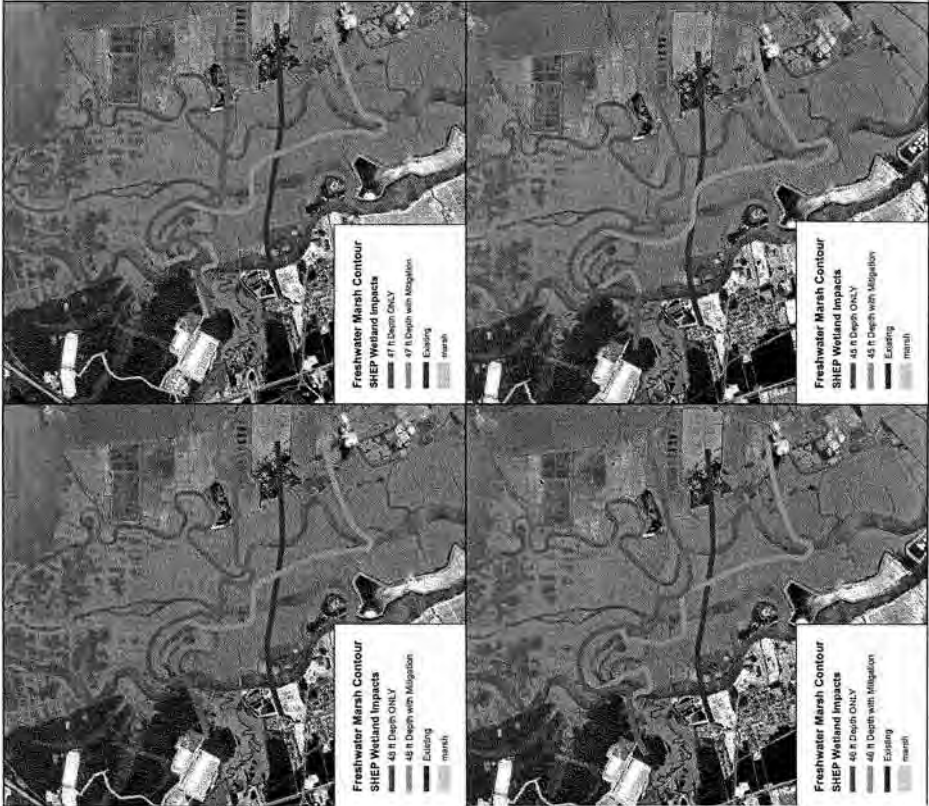

Bailey, William G SAS

From: Bailey, William G SAS
Sent: Friday, May 13, 2011 3:30 PM
To: 'J. Christopher Beckham'
Cc: 'hightocw@dhc.sc.gov'; 'Heather Preston'; Hall, Jeffrey M COL SAS; Oddi, Peter A SAS; Okane, Jason D SAS; Sloan, G Rogers SAS
Subject: Savannah Harbor Expansion Project -- SC Water Quality Certification Processing Fee (UNCLASSIFIED)

Classification: UNCLASSIFIED
Caveats: NONE

Regarding the Water Quality Certification processing fee, we have confirmed with Charleston District that they do not pay this fee for a Federal navigation project. Since the Savannah Harbor Expansion Project (SHEP) is also a Federal navigation project, it would be consistent for you to treat SHEP in the same manner.

We are working to get you the remaining information you requested and look forward to assisting you as you need.

Bill Bailey
Chief, Planning Division

Classification: UNCLASSIFIED
Caveats: NONE

Bailey, William G SAS

From: Wade Cantrell [cantrewm@dhec.sc.gov]
Sent: Tuesday, May 17, 2011 11:09 AM
To: Bailey, William G SAS
Cc: J. Christopher Beckham; David Graves; Heather Preston
Subject: Meeting Follow Up

Bill,

Good discussion at the meeting last week. I wanted to follow up on the additional information regarding the DO injection and wetland impact modeling. The question of who should do the work came up at the meeting. We have discussed it again here and have no issue if the Corps elects to use its original contractors (Tetra Tech and Eco2/Dr. Richard Speece) for the additional work.

On the DO injection modeling, we need additional assurance that the Speece cones will perform as designed at the Back River location. There are studies that suggest Speece cones are primarily a deep water technology not suitable for shallow waters (see for example Final Aeration Technology Feasibility Report for the San Joaquin River Deep Water Ship Channel, Jones and Stokes, October 2004) and that sufficient water depth at the injection point is a critical design consideration. Plume model results in the design report for Savannah show extremely high dissolved concentrations in close proximity to the water surface at the Back River location, and it is not clear that enough oxygen would stay in solution and remain in the river to mitigate predicted DO impacts on Back River.

The following information is requested:

- 1) Explanation of why this technology is suitable for the shallow Back River which addresses the apparent discrepancy with the San Joaquin River case and other studies.
- 2) Explanation of the physical factors controlling oxygen solution dynamics at Back River conditions, including DO concentration as a function of depth at which effervescence would occur.
- 3) Additional discussion that builds on the results presented in Figure 6-3 of the design report and explains how oxygen solution dynamics could affect the results of the existing plume model analysis, which treats DO as a conservative material.
- 4) Justification of the system-wide 80% transfer efficiency assumption specifically for the Back River location

On the wetland impact modeling, we need assurance that the Corps' wetland impact and mitigation projections are not affected by subsequent monitoring data and hydrodynamic and salinity model refinement, which is documented in EPA's 2010 draft TMDL for Savannah Harbor.

The following information is requested:

- 5) Comparison of wetland impacts and mitigation success for representative scenarios as predicted by the original Corps model and the refined EPA model.

Let me know if this is consistent or not with your recollection of the meeting discussion. Chris will be including the modeling questions in the Department's official response.

Thanks,
 Wade

Bailey, William G SAS

From: Bailey, William G SAS
Sent: Tuesday, May 17, 2011 3:18 PM
To: 'beckhajo@dhec.sc.gov'; 'Wade Cantrell'; 'Blair N. Williams'; 'Kelie Moore'; 'Dale Caldwell'; 'Keith_Parsons@mail.dnr.state.ga.us'; 'Bob Lord (Lord.Bob@epa.gov)'; 'Bill Wikoff'; 'Chuck_Hayes@fws.gov'; 'wendtp@dnr.sc.gov'; 'Bob Perry'; 'kay davy@noaa.gov' 'hmoorer@gaports.com'; 'Jeff_Larson@dnr.state.ga.us'; 'Brad_Gane@dnr.state.ga.us'; 'Tim Barrett'; 'Okane, Jason D SAS'; 'Bradley_Kenneth P SAM'; 'McIntosh, Margaret (Mackie) SAS'; 'King, Jeffrey K. SAS'; 'Small, Daniel L SAD'; 'Lampley, Vechere V SAD'; 'Pace Wilber'; 'David Bernhart'; 'Jack_Arnold@fws.gov'; 'Mark_Musaus@fws.gov'; 'Sandy_Tucker@fws.gov'; 'Jane_Griess@fws.gov'; 'Mueller, Heinz J.'; 'Gagliano.Paul@epamail.epa.gov'; 'Godfrey Annie@epamail.epa.gov'; 'Derby.Jennifer@epamail.epa.gov'; 'Melville.William@epamail.epa.gov'; 'Mancusi-Ungaro.Philip@epamail.epa.gov'; 'Gregory_Hogue@ios.doi.gov'; 'joyce_stanley@ios.doi.gov'; 'Rheta Geddings DiNovo'; 'Barbara Neale'; 'Heather Preston'
Cc:
Subject: Savannah Harbor Expansion Project: Wetlands Interagency Coordination Team (UNCLASSIFIED)

Classification: UNCLASSIFIED
 Caveats: NONE

In their review of the November 2010 Draft EIS, EPA had several questions about the procedures used to evaluate project impacts and the proposed wetland mitigation. They requested the Corps convene an interagency group to discuss these issues.

The Corps would like to hold another meeting of the Wetlands Interagency Coordination Team to review the Savannah Harbor Expansion Project's wetland impact evaluation procedures and proposed wetland mitigation. EPA has agreed to provide a room for us to meet. We will meet on 1 June at the Atlanta Federal Center (EPA building). The meeting will be in the 3rd floor Augusta Room (bridge building) from 10 AM to 4 PM.

The Corps will present the procedures that we used during our evaluations, the steps we followed in developing the wetland mitigation plan, and our recommended wetland mitigation. We will also summarize additional information that we intend to include in the Final EIS in response to comments that we received on the Draft EIS.

Please join us.

Bill Bailey

Classification: UNCLASSIFIED
 Caveats: NONE

Bailey, William G SAS

From: Bailey, William G SAS
Sent: Wednesday, May 18, 2011 11:27 AM
To: 'Wade Cantrell'
Cc: 'beckhaje@dhec.sc.gov'; 'Heather Preston'; 'hightocw@dhec.sc.gov'; 'David Graves'; Okane, Jason D SAS; McIntosh, Margaret (Mackie) SAS; Hoke, Joseph T SAS
Subject: SHEP -- hydrodynamic and water quality models (UNCLASSIFIED)
Attachments: savannah_harbor_tmdl_draft_201056.pdf.pdf; Modeling Report - Savannah Harbor Z-Grid Model (April 2010).pdf

Classification: UNCLASSIFIED

Caveats: NONE

You asked how well the hydrodynamic and water quality models (EFDC and WASP) that the resource agencies had approved for the Corps to use for impact evaluation purposes on the Savannah Harbor Expansion Project compare with a later version that EPA used in their updated D.O. TMDL for the harbor.

The basis for both models is the same. The Corps (through Tetra Tech) enhanced models that EPA had developed and used for its Nov 2006 D.O. TMDL for the harbor. When EPA decided to update the TMDL, they also decided to revise the enhanced models. Section 3 of the attached Draft TMDL from EPA describes their modeling process, including the revisions they made to the earlier versions. Among other changes, they switched from a sigma-grid to a Z-grid, updated the hydrodynamics for the Middle and Back Rivers, and reduced the resolution in the Middle, Back, and upper Savannah Rivers by going to one grid layer in those locations. The primary purpose for revising the models was to reduce their computer run time.

When EPA summarizes the model development for the 2010 Draft D.O. TMDL (attached), they refer (page 2, end of top paragraph in attached) to the Corps' 2006 modeling report for the Savannah Harbor Expansion Project (Development of the Hydrodynamic and Water Quality Models for the Savannah Harbor Expansion Project, Final, January 2006) and a draft Z-grid Modeling Report (attached). You reviewed the Corps' model calibration report in 2006 as part of our interagency peer review and approval process. In 2010, Tetra Tech prepared a Water Quality Model Update Report to document the work they had performed to update the models for EPA. As far as I know, EPA did not send that calibration report out for specific interagency peer review and approval, although both SC and GA water quality modelers have reviewed the model. Section 2 of that report summarizes the revisions they made to the earlier versions. In the conclusions in Section 8, they state "The post-processor developed for the USACE on the enhanced EFDC and WASP models was modified to read the Z-grid results. The 1999 enhanced (sigma) and the Z-grid are approximately the same. Actually, the Z-grid provides a better calibration of the salinity in the navigation channel and the dissolved oxygen dynamics are captured better than the enhanced (sigma) grid. This exercise proved to be useful in developing a natural conditions model and making longterm model runs with the reduced run times." They did not provide a direct comparison of the USACE-enhanced EFDC and WASP models with the updated Z-grid version. They only provided data showing how the later version compared to observed data.

The following is the text from a 4/23/08 email from Jim Greenfield when he was at EPA in response to a question from me about EPA's use of an updated version of the models:

"These are the same models except with different grid configurations.

Both versions give similar results - not exactly the same because of the grid configuration but will give similar DO delta projections for both TMDLs and deepening

EFDC sigma grid was never fully set up for natural conditions (SOD, reaeration, channel width, additional marshes, etc) so nothing to compare. But in my opinion if we transfer Sav zgrid info to sigma grid results will be similar.

But I have no need to do that and if the USACE wants to be my guest.

Reasons we changed

- faster run times
- eliminated the thin layers in middle and back rivers and reaeration and sod issues
- able to include the appropriate bottom slope in upper river portion

Bottom line should not have compatibility issues as long as appropriate modeling assumptions and inputs are used in both

sigma model may be better for harbor salinity alternative evaluation, zgrid model is better for water quality"

At that time I also asked Elizabeth Booth (GA DNR-EPD) about the updated models. She initially said that she and Steven Davie (Tetra Tech) completely agreed with Jim Greenfield's 4/23/08 comments. I went on to ask: "So am I correct that you don't see a need for GA DNR-EPD or EPA to request the Corps rerun the impact or mitigation analyses for the Savannah Harbor Expansion Project using the Z-grid -- that you both are comfortable with the sigma grid for those purposes? She replied: "Yes". It is my understanding from recent emails that both Ms. Booth and Mr. Davie remain comfortable with the use and comparison of both models.

The Corps used the Z-grid model in its re-evaluation of potential impacts to chloride levels at the City of Savannah's water intake on Abercorn Creek. Tetra Tech modified the Z-grid model by adding a more detailed grid in the Abercorn Creek, Bear Creek, and Big Collis Creek area (upstream of I-95). Their December 2010 report titled "Chloride Modeling, Savannah Harbor Expansion Project" documents their work. Section 4.1 of Appendix A states "The SHEP EFDC model was revised to include more cells in the Abercorn Creek and Bear Creek region to better simulate the flow connections upstream of the City's intake. This modification to the grid was not expected to affect the other EFDC calculations and the impact predictions based on those calculations." In Section 4.4 of that appendix, they compare results from the sigma-grid model to results from the Z-grid model. Page 8 states "Tetra Tech validated the modified model, Z-grid and extended grid, to water surface elevation, flow, and salinity. Figures 4-3 to 4-8 present a comparison of measured and simulated water surface elevation at Fort Pulaski, Houlihan Bridge on the Front River and I-95 Bridge. These comparisons show that the model developed for the present study show the same degree of accuracy as the original model calibrated and validated in 2006. ... Figures 4-11 and 4-12 present the salinity comparison at the stations USACE Docks and Houlihan Bridge on the Front River. These figures show that the model is able to reproduce the same trends and values of the previous calibrated version of the model." I will send that report separately because of its size.

I trust this information provides sufficient technical support on this issue. Modeling experts at other organizations (EPA, GA DNR-EPD, and Tetra Tech) have considered this issue and believe the Corps' enhanced EFDC and WASP models compare well with EPA's later Z-grid version.

If the Savannah Harbor Expansion Project is constructed, the Corps intends to use the most recent (Z-grid) version in the Monitoring and Adaptive Management phases of the project. The Corps' 2010 Draft EIS proposed three updates to the calibration of these models during those phases to further enhance their accuracy. The Corps would use those updated models during (1) the construction period to identify whether greater impacts occur than are expected, and (2) after construction to ensure the mitigation plan functions as intended.

Please let me know whether you need and additional information on this issue.

Bill Bailey

Classification: UNCLASSIFIED

Caveats: NONE

Bailey, William G SAS

From: Bailey, William G SAS
Sent: Wednesday, May 18, 2011 11:29 AM
To: 'Wade Cantrell'
Cc: 'beckhajc@dhc.sc.gov'; 'Heather Preston'; 'hightocw@dhc.sc.gov'; 'David Graves'; Okane, Jason D SAS; McIntosh, Margaret (Mackie) SAS; Hoke, Joseph T SAS
Subject: SHEP -- hydrodynamic and water quality models #2 (UNCLASSIFIED)
Attachments: SHEP Chloride Modeling Report (Rev 2 - Dec 31, 2010) with Appendices.pdf

Classification: UNCLASSIFIED

Caveats: NONE

Here is the other report.

BB

From: Bailey, William G SAS
Sent: Wednesday, May 18, 2011 11:27 AM
To: 'Wade Cantrell'
Cc: 'beckhajc@dhc.sc.gov'; 'Heather Preston'; 'hightocw@dhc.sc.gov'; 'David Graves'; Okane, Jason D SAS; McIntosh, Margaret (Mackie) SAS; Hoke, Joseph T SAS
Subject: SHEP -- hydrodynamic and water quality models (UNCLASSIFIED)

You asked how well the hydrodynamic and water quality models (EFDC and WASP) that the resource agencies had approved for the Corps to use for impact evaluation purposes on the Savannah Harbor Expansion Project compare with a later version that EPA used in their updated D.O. TMDL for the harbor.

The basis for both models is the same. The Corps (through Tetra Tech) enhanced models that EPA had developed and used for its Nov 2006 D.O. TMDL for the harbor. When EPA decided to update the TMDL, they also decided to revise the enhanced models. Section 3 of the attached Draft TMDL from EPA describes their modeling process, including the revisions they made to the earlier versions. Among other changes, they switched from a sigma-grid to a Z-grid, updated the hydrodynamics for the Middle and Back Rivers, and reduced the resolution in the Middle, Back, and upper Savannah Rivers by going to one grid layer in those locations. The primary purpose for revising the models was to reduce their computer run time.

When EPA summarizes the model development for the 2010 Draft D.O. TMDL (attached), they refer (page 2, end of top paragraph in attached) to the Corps' 2006 modeling report for the Savannah Harbor Expansion Project (Development of the Hydrodynamic and Water Quality Models for the Savannah Harbor Expansion Project, Final, January 2006) and a draft Z-grid Modeling Report (attached). You reviewed the Corps' model calibration report in 2006 as part of our interagency peer review and approval process. In 2010, Tetra Tech prepared a Water Quality Model Update Report to document the work they had performed to update the models for EPA. As far as I know, EPA did not send that calibration report out for specific interagency peer review and approval, although both SC and GA water quality modelers have reviewed the model. Section 2 of that report summarizes the revisions they made to the earlier versions. In the conclusions in Section 8, they state "The post-processor developed for the USACE on the enhanced EFDC and WASP models was modified to read the Z-grid results. The 1999 enhanced (sigma) and the Z-grid are approximately the same. Actually, the Z-grid provides a better calibration of the salinity in the

navigation channel and the dissolved oxygen dynamics are captured better than the enhanced (sigma) grid. This exercise proved to be useful in developing a natural conditions model and making longterm model runs with the reduced run times." They did not provide a direct comparison of the USACE-enhanced EFDC and WASP models with the updated Z-grid version. They only provided data showing how the later version compared to observed data.

The following is the text from a 4/23/08 email from Jim Greenfield when he was at EPA in response to a question from me about EPA's use of an updated version of the models:

"These are the same models except with different grid configurations.

Both versions give similar results - not exactly the same because of the grid configuration but will give similar DO delta projections for both TMDLs and deepening

EFDC sigma grid was never fully set up for natural conditions (SOD, reaeration, channel width, additional marshes, etc) so nothing to compare. But in my opinion if we transfer Sav zgrid info to sigma grid results will be similar.

But I have no need to do that and if the USACE wants to be my guest.

Reasons we changed

- faster run times
- eliminated the thin layers in middle and back rivers and reaeration and sod issues
- able to include the appropriate bottom slope in upper river portion

Bottom line should not have compatibility issues as long as appropriate modeling assumptions and inputs are used in both

sigma model may be better for harbor salinity alternative evaluation, zgrid model is better for water quality"

At that time I also asked Elizabeth Booth (GA DNR-EPD) about the updated models. She initially said that she and Steven Davie (Tetra Tech) completely agreed with Jim Greenfield's 4/23/08 comments. I went on to ask: "So am I correct that you don't see a need for GA DNR-EPD or EPA to request the Corps rerun the impact or mitigation analyses for the Savannah Harbor Expansion Project using the Z-grid -- that you both are comfortable with the sigma grid for those purposes? She replied: "Yes". It is my understanding from recent emails that both Ms. Booth and Mr. Davie remain comfortable with the use and comparison of both models.

The Corps used the Z-grid model in its re-evaluation of potential impacts to chloride levels at the City of Savannah's water intake on Abercorn Creek. Tetra Tech modified the Z-grid model by adding a more detailed grid in the Abercorn Creek, Bear Creek, and Big Collis Creek area (upstream of I-95). Their December 2010 report titled "Chloride Modeling, Savannah Harbor Expansion Project" documents their work. Section 4.1 of Appendix A states "The SHEP EFDC model was revised to include more cells in the Abercorn Creek and Bear Creek region to better simulate the flow connections upstream of the City's intake. This modification to the grid was not expected to affect the other EFDC calculations and the impact predictions based on those calculations." In Section 4.4 of that appendix, they compare results from the sigma-grid model to results from the Z-grid model. Page 8 states "Tetra Tech validated the modified model, Z-grid and extended grid, to water surface elevation, flow, and salinity. Figures 4-3 to 4-8 present a comparison of measured and simulated water surface elevation at Fort Pulaski, Houlihan Bridge on the

Front River and I-95 Bridge. These comparisons show that the model developed for the present study show the same degree of accuracy as the original model calibrated and validated in 2006. ... Figures 4-11 and 4-12 present the salinity comparison at the stations USACE Docks and Houlihan Bridge on the Front River. These figures show that the model is able to reproduce the same trends and values of the previous calibrated version of the model." I will send that report separately because of its size.

I trust this information provides sufficient technical support on this issue. Modeling experts at other organizations (EPA, GA DNR-EPD, and Tetra Tech) have considered this issue and believe the Corps' enhanced EFDC and WASP models compare well with EPA's later Z-grid version.

If the Savannah Harbor Expansion Project is constructed, the Corps intends to use the most recent (Z-grid) version in the Monitoring and Adaptive Management phases of the project. The Corps' 2010 Draft EIS proposed three updates to the calibration of these models during those phases to further enhance their accuracy. The Corps would use those updated models during (1) the construction period to identify whether greater impacts occur than are expected, and (2) after construction to ensure the mitigation plan functions as intended.

Please let me know whether you need and additional information on this issue.

Bill Bailey

Classification: UNCLASSIFIED
Caveats: NONE



May 27, 2011

Colonel Jeffrey M. Hall, District Commander
U.S. Army Corps of Engineers, Savannah District
P.O. Box 889
Savannah, Georgia 31402-0889

Re: Coastal Zone Consistency Determination for SHEP

Dear Colonel Hall:

I want to thank you and your staff for meeting with my staff in Charleston on April 21, 2011, to discuss the Savannah Harbor Expansion Project (SHEP). We appreciated the opportunity to further discuss some of the aspects of this project which could potentially have a significant impact on coastal resources and uses. As outlined in our letters dated January 25 and 31, 2011, South Carolina Department of Health and Environmental Control, Office of Ocean and Coastal Resource Management (SCDHEC-OCRM) does not concur with the Corps' finding of consistency for SHEP. SCDHEC-OCRM has objected to the Corps finding of Consistent to the Maximum Extent Practicable as well as the expressed opinion that SHEP is fully consistent.

We have received the additional information from Mr. Bailey on May 13th and will review and provide additional feedback as needed.

As a threshold matter, I believe it is important to ensure there is a mutual understanding on where we are in the Federal Consistency process as stated in §§ 1451, et. Seq., and 15 C.F.R. § 930 Subpart C. The Corps of Engineers found SHEP consistent with South Carolina's Coastal Program to the maximum extent practicable. In fact the Corps asserts that SHEP is fully consistent. SCDHEC-OCRM objects to this finding. The Federal Consistency process allows for the State and the federal agency (in this case the Corps of Engineers) to attempt to resolve those differences either informally or formally or via mediation (15 C.F.R. § 930.112) or judicial review (15 C.F.R. §930.116). However, before we attempt to more 'formally' resolve our agencies' different positions on consistency, it is important for the Corps to understand that positions and/or outcomes can potentially change.

In response to your letter dated March 30, 2011, I'd like to address a few issues. SCDHEC-OCRM did consider the national interest of SHEP as well as the potential regional benefits of this project as they relate to South Carolina's Coastal Program. The fundamental principle that underpins both the State and the federal Coastal Zone Management Act (CZMA) is the importance of our nation's coastal resources. Sections 302 and 303 of the federal CZMA detail the congressional findings and declaration of policy for the nation as it relates to coastal resources. In evaluating SHEP, SCDHEC-OCRM found that it contravened the State's applicable resource policies resulting in potential significant negative effects on coastal resources and uses which have been determined to be in the national interest to preserve and protect. However, with respect to the national interest in port related activities, SCDHEC-OCRM has carefully evaluated and weighed the potential significant negative environmental effects from SHEP and found that these negative impacts outweighed any benefits that might be in the national interest.

Ocean and Coastal Resource Management

Charleston Office • 302M, Military Avenue • Suite 400 • Charleston, SC 29405 • Phone: 803-762-2200 • Fax: 803-762-2201 • www.dhec.state.sc.us

As to activities of Regional Benefit, South Carolina's federally approved Coastal Program identified two categories of activities of Regional Benefit, transportation facilities and parks. Activities of regional benefit must also be found consistent with SC's CZMP. SCDHEC-OCRM finds SHEP to be inconsistent with the applicable resource policies even when given full consideration of any potential regional benefit. It is worth re-stating that the benefits to South Carolina from this project are minimal in light of the direct and indirect impacts.

Finally, SCDHEC-OCRM clearly articulated our reasons for objecting to the Corps' consistency determination and provided supporting information in our letters of January 25 and 31, 2010. Specifically, the potential impacts to the resources under the proposed plan would be excessive and without adequate opportunities to avoid or minimize such impacts. Furthermore, the plan's proposed mitigation would also be inconsistent with the regulations and policies of South Carolina's Coastal Program. Of particular note is the proposal to mitigate a significant amount of wetland impacts (both direct and indirect) with out-of-kind mitigation. Of the 2,683 acres proposed to be acquired and preserved as mitigation, it is unknown how much of this land is in fact wetlands versus uplands. Furthermore, other identified mitigation techniques rely on elaborate flow modifications to and mechanical injection of oxygen with Speece cones into the Savannah River. Even though this technology has not been shown to be effective in tidal systems it is being relied upon as the single best management practice to restore dissolved oxygen (DO) to pre-project conditions in this highly altered and impacted river system. Perhaps the most troubling aspect of the mitigation proposal is the reliance on annual appropriations to fund the purchase of the 2,683 acres of land for 'mitigation', construction, operation and maintenance of flow modifications, as well as Speece cone installation, operations and maintenance. The flow modifications will require on-going maintenance and the Speece cones are highly mechanized systems and if used, should require a dedicated source of funding as well as contingencies in the event these systems do not perform as predicted. SCDHEC-OCRM does not concur that relying on annual federal budget appropriations is an adequate mechanism for ensuring the successful mitigation for a project of this large nature and scope. For projects of similar scope found consistent with South Carolina's coastal program, SCDHEC-OCRM required a showing of an on-going financial commitment to operate and maintain such a system/structure. Additionally, projects of similar scope that SCDHEC-OCRM found consistent with the Coastal program required an identifiable financially binding commitment such as a performance bond or letter of credit to cover the cost of maintenance, operation, reconstructing or removal of structures that do not perform as predicted as well as restoring the affected area.

As mentioned previously, SCDHEC-OCRM would welcome continued discussions with the Corps regarding this project to discuss a potential outcome that reduces the impacts of the project as well as modifications to the proposed mitigation. If this is an option to which the Corps is agreeable, I will have my staff set up a meeting to facilitate further discussion. However, if this is not a viable option, then SCDHEC-OCRM will consider other pathways to ensure consistency with our State's Coastal program.

Sincerely,


 Carolyn Bohm Kelly
 Deputy Commissioner, SCDHEC-OCRM

cc: Earl Hunter, Commissioner, SCDHEC
 Donna Wentling, Acting Director NOAA-OCRM


Savannah Harbor Expansion Project


Freshwater Tidal Wetland Impacts

Marsh contours are generalized and are based on model predictions using average freshwater river flows and tidal conditions.

In all figures, the blue line represents Existing Conditions (ie. existing location of freshwater marsh contour). Marsh located north of the blue line are considered freshwater tidal marsh and areas south, or closer to the ocean, are considered to be brackish with adjacent river salinities greater than 0.5 ppt.

For greater detail and more information on model simulations and wetland impact determination see the SHEP Draft EIS and GRR.

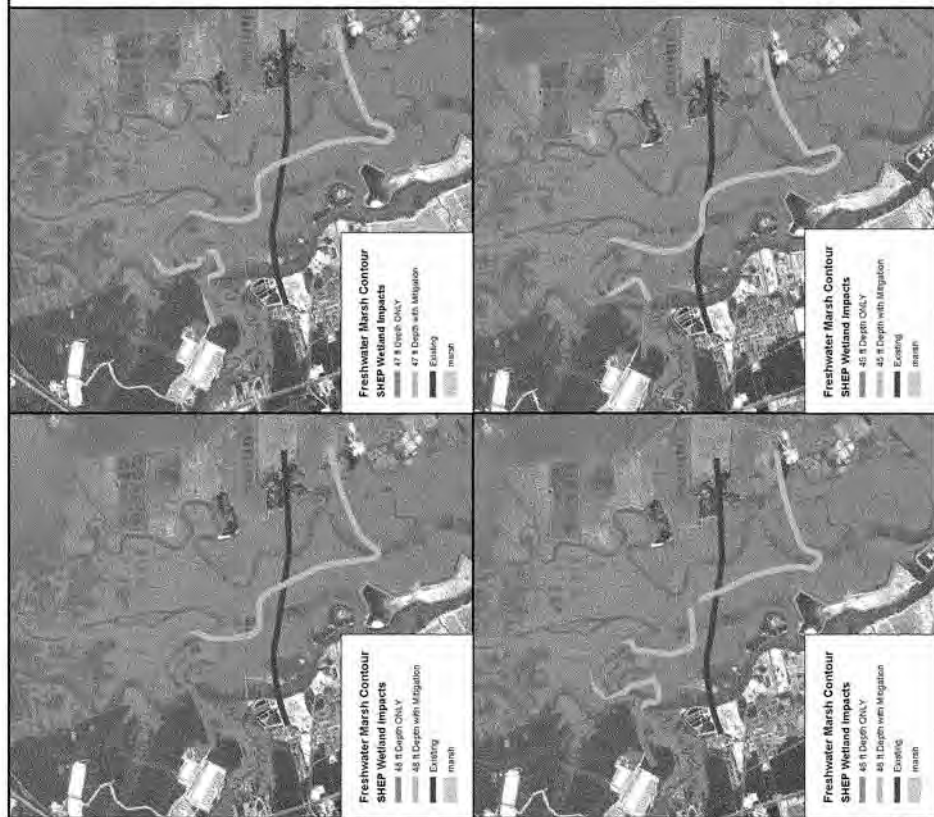

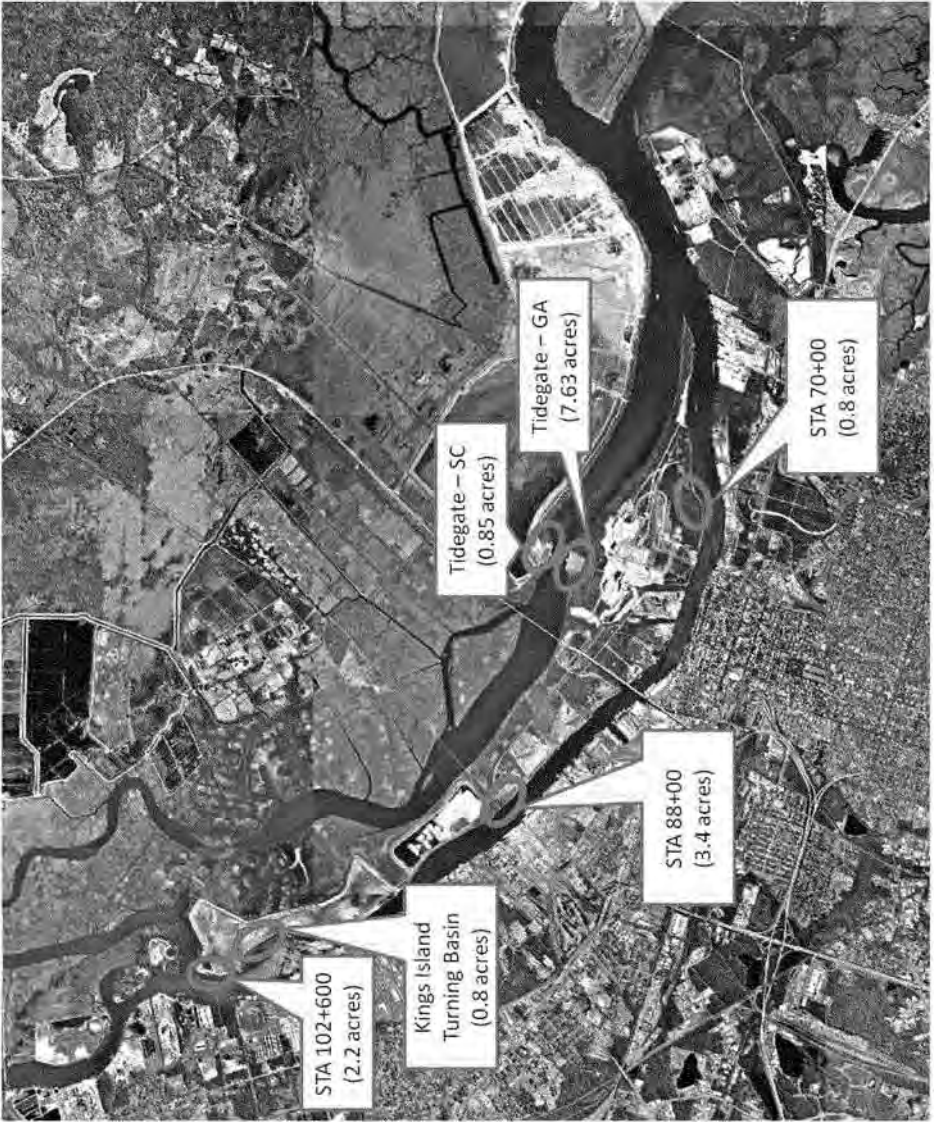

Bailey, William G SAS

From: Bailey, William G SAS
Sent: Friday, June 03, 2011 3:07 PM
To: 'beckhajt@dhec.sc.gov'; 'Blair N. Williams'; 'Kelle Moore'; 'Dale Caldwell'; 'Keith_Parsons@mail.dnr.state.ga.us'; 'Bob Lord (Lord.Bob@epa.gov)'; 'Mueller, Heinz J.'; 'Bill Wikoff'; 'wendtp@dnr.sc.gov'; 'Bob Perry'; 'kay.davy@noaa.gov' 'Wade Cantrell'; 'Chuck_Hayes@fws.gov'; 'hmocrer@gaports.com';
Cc: 'Jeff_Larson@dnr.state.ga.us'; 'Brad_Gane@dnr.state.ga.us'; 'Tim Barrett'; Okane, Jason D SAS; Bradley, Kenneth P SAM; McInlosh, Margaret (Mackie) SAS; King, Jeffrey K. SAS; Small, Daniel L SAD; Lampley, Vechere V SAD; 'Pace Wilber'; 'David Bernhart'; 'Jack_Arnold@fws.gov'; 'Mark_Musa@fws.gov'; 'Sandy_Tucker@fws.gov'; 'Jane_Griess@fws.gov'; 'Gagliano.Paul@epamail.epa.gov'; 'Godfrey.Annie@epamail.epa.gov'; 'Derby.Jennifer@epamail.epa.gov'; 'Melville.William@epamail.epa.gov'; 'Mancusi-Ungaro.Phillip@epamail.epa.gov'; 'Gregory_Hogue@ios.doi.gov'; 'joyce_stanley@ios.doi.gov'; 'Rheta Geddings DiNovo'; 'Barbara Neale'; 'Heather Preston'
Subject: Savannah Harbor Expansion Project: Wellands Interagency Coordination Team meeting (UNCLASSIFIED)
Attachments: 2011-06-01 SHEP Wetland Presentation.pdf

Classification: UNCLASSIFIED
 Caveats: NONE

I've attached the presentation we gave at this Wednesday's meeting and the sign-in sheet.

Thank you all for attending.

We are adding some of the figures that had in the presentation to our write-up for the FEIS.
 We expect to complete that and send it out to you by the end of next week.

Bill Bailey
 Chief, Planning Division

Classification: UNCLASSIFIED
 Caveats: NONE

Savannah Harbor Expansion Project (SHEP) – Information Meeting Wetland Impacts and Mitigation

Bill Bailey and Jeffrey King


US Army Corps of Engineers,
Savannah District

Atlanta, Georgia

June 1, 2011



US Army Corps of Engineers
BUILDING STRONG

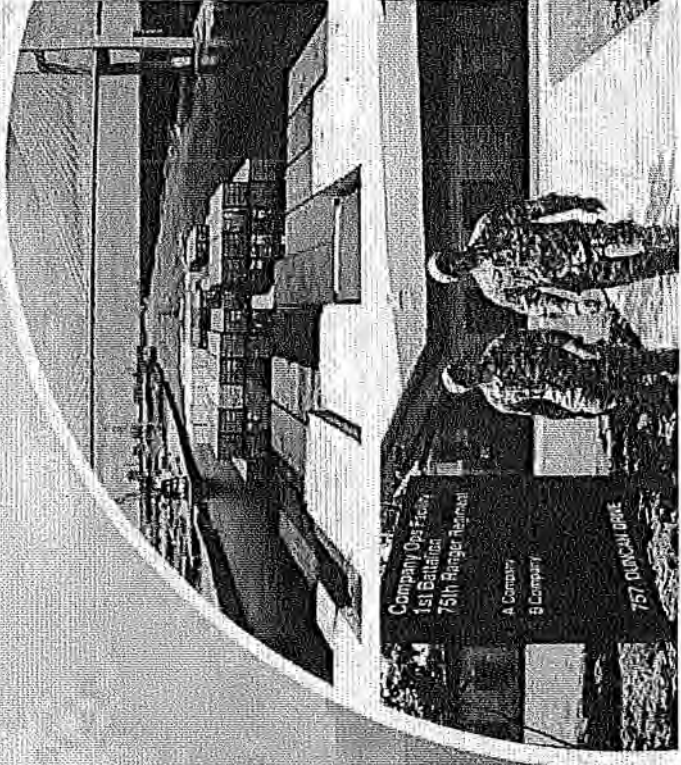

Outline

- Provide agencies with history of Wetland Interagency Coordination Team (ICT) discussions and recommendations concerning wetland impact evaluation and mitigation
- Review direct impacts to wetlands
- Review mitigation for direct impacts to wetlands
- Review indirect impacts to wetlands
- Review mitigation for indirect impacts to wetlands



History of Wetland Interagency Coordination Team

- EPA, USFWS, NMFS, GA DNR-EPD,
GA DNR-CRD, SC DNR, and SC DHEC
- Previous meetings
 - ▶ 01 July 2003
 - ▶ 31 May 2006
 - ▶ 15 Dec 2006
 - ▶ 20/21 June 2007
- Site visit to Disposal Area 1S on
10 August 2009



Guidance Provided By Wetland Interagency Coordination Team

- 01 July 2003 Meeting
 - ▶ Freshwater vegetative communities are more valuable in the Savannah River estuarine ecosystem
 - ▶ USFWS favors a community-based approach to assessing impacts to tidal wetlands
 - ▶ Possibly need a sensitivity analysis of alternate river flows



Guidance Provided By Wetland Interagency Coordination Team

■ 31 May 2006 Meeting

- ▶ Would use hydrodynamic model to identify changes in salinity
- ▶ Would use Marsh Succession Model to identify changes in vegetation/community resulting from salinity changes
- ▶ Would develop multiple methods of identifying changes in vegetation
 - Movement of 0.5 ppt contour
 - Would use ATM Marsh Succession Model
 - Would use USFWS/USGS Marsh Succession Model



Guidance Provided By Wetland Interagency Coordination Team

- 31 May 2006 Meeting (continued)
 - ▶ Conduct basic analysis using average river flows (1997)
 - ▶ Conduct drought sensitivity analysis using 2001 flows
 - ▶ Conduct sensitivity analysis on sea level rise
 - 25 and 50 cm over 50 years
 - ▶ Evaluate impacts over a 1 Mar – 30 Oct growing season
 - ▶ Evaluate sea level rise and drought (combined) on recommended plan



Guidance Provided By Wetland Interagency Coordination Team

- 31 May 2006 Meeting (continued)
 - ▶ Corps should provide salinity values predicted in root zone from Model-To-Marsh
 - ▶ Corps should provide changes in root zone salinity from Model-To-Marsh
 - ▶ USFWS maintains that freshwater tidal wetlands in Middle and Back Rivers are most ecologically valuable areas within the lower estuary
 - ▶ Areas along navigation channel have considerably less ecological value
 - ▶ USFWS reiterated that it can accept no further loss of tidal freshwater marsh



Guidance Provided By Wetland Interagency Coordination Team

- 31 May 2006 Meeting (continued)
 - ▶ Corps should evaluate acquiring Harrison property adjacent to SNWR as mitigation
 - ▶ Present surface, middle and bottom salinities
 - ▶ Use surface salinity for wetland evaluation because that is what floods the marshes
 - ▶ Display locations where the surface salinity would change
 - ▶ Provide acreage and % change for each vegetative type



Guidance Provided By Wetland Interagency Coordination Team

- 15 Dec 2006 Meeting
 - ▶ Evaluate not dredging the upper portions of Middle and Back Rivers
 - ▶ Evaluate blocking original mouth of McCoys Cut
 - ▶ Evaluate rerouting Middle River through Rifle Cut



BUILDING STRONG®

Guidance Provided By Wetland Interagency Coordination Team

- 20/21 June 2007 Meeting
 - ▶ Use 50%-tile exceedence surface salinity values for wetland evaluations
 - ▶ Reaffirmed basic analysis should use average river flows
 - ▶ Manually extending salinity contours across the marsh is an acceptable procedure
 - ▶ Provide information on acreage of 5 salinity categories (<0.5; 0.5-1.0; 1-2; 2-4; >4 ppt)



Guidance Provided By Wetland Interagency Coordination Team

- 20/21 June 2007 Meeting (continued)
 - ▶ Drop consideration of flow rerouting plans 4, 5 and 8 because they decrease flooding of marshes
 - ▶ Evaluate flow rerouting plans 6 and 7, using 3 as a base
 - ▶ USFWS would not consider any out-of-kind replacement for loss of tidal freshwater wetlands



Guidance Provided By

Wetland Interagency Coordination Team

■ 20/21 June 2007 Meeting (continued)

- ▶ All tidal freshwater marshes within the Refuge possess the same ecological value
- ▶ USFWS preferred leaving slough at lower arm of McCoys Cut for fishing rather than filling to create tidal freshwater wetlands
- ▶ Constructing an earthen sill at the lower end of the Sediment Basin could create water quality impacts, depending on material used and construction technique
- ▶ Add "Restore wetlands at Disposal Area 1S" to list of potential mitigation features
- ▶ Corps will consider grading down high ground to produce tidal freshwater wetlands





BUILDING STRONG®

Interagency Site Visit

Disposal Area 1S

10 August 09

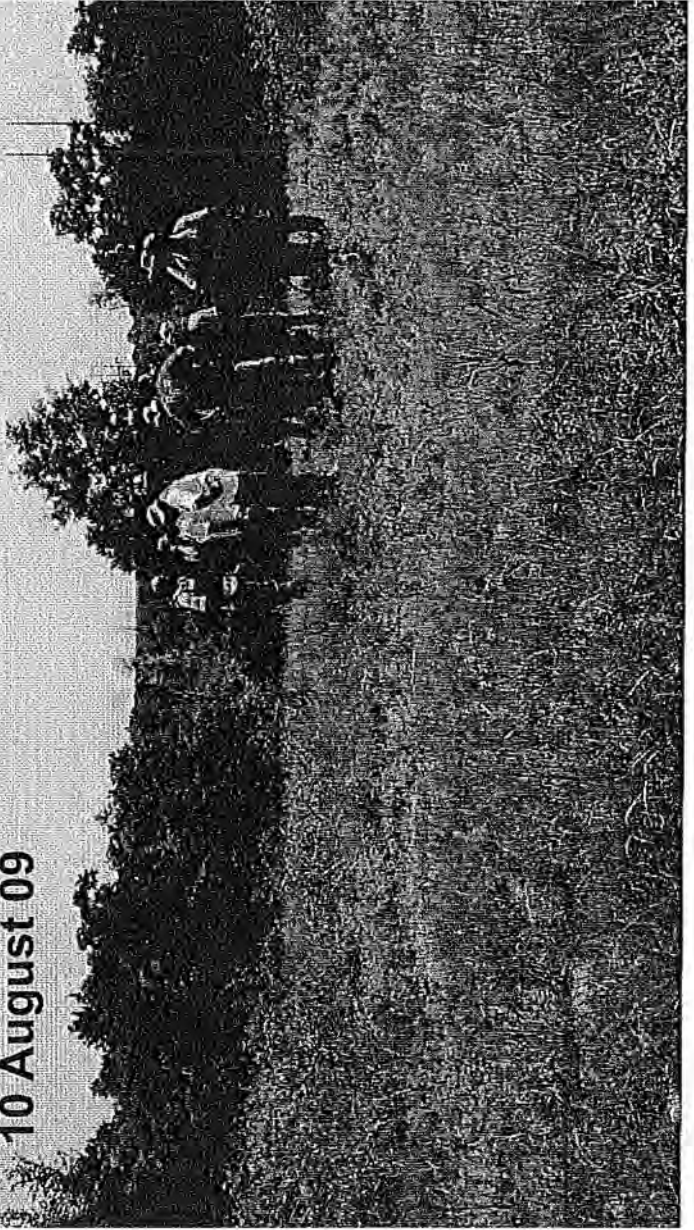

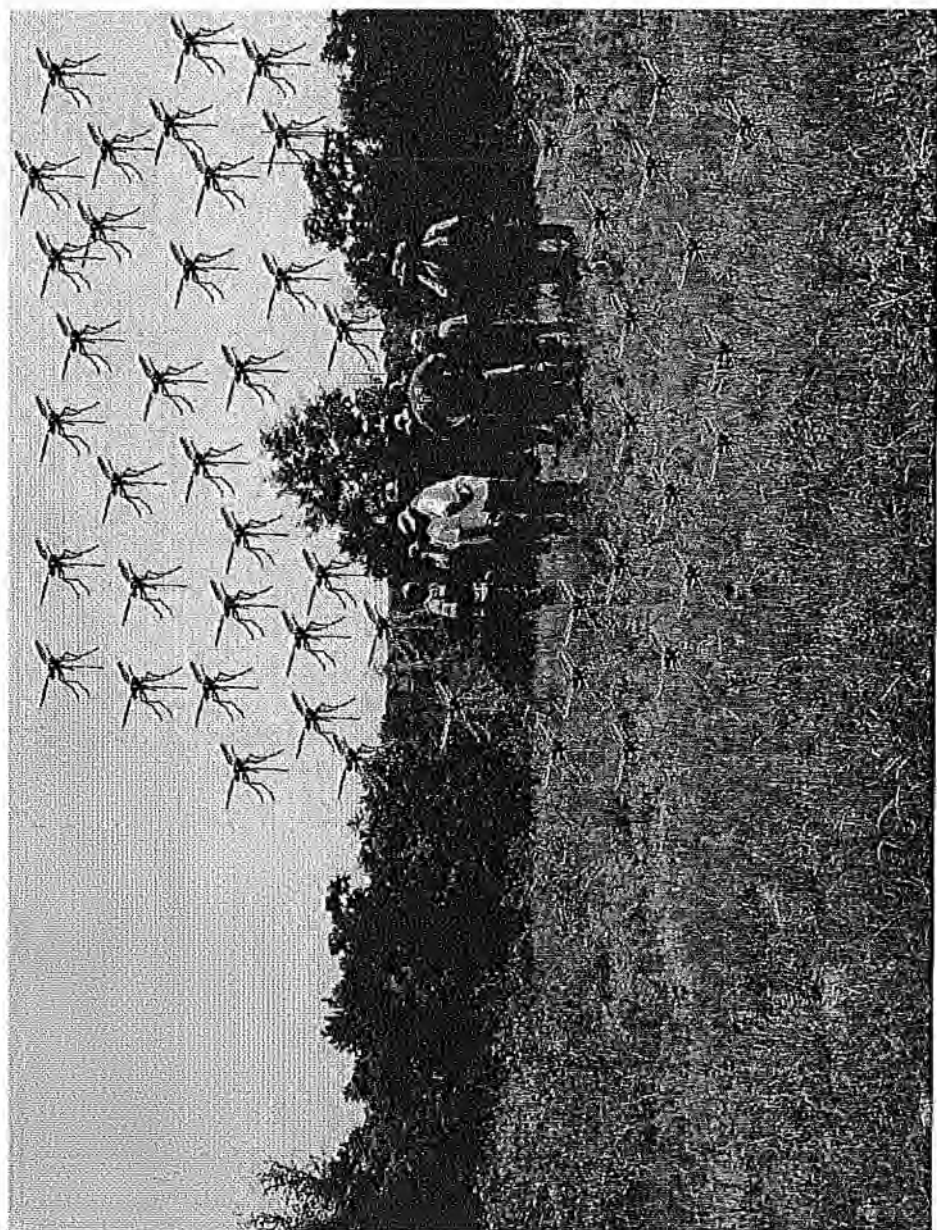

Wetland Impacts



BUILDING STRONG®

Wetland Impacts Associated with SHEP

- DEIS Evaluated several alternative depths
- For simplicity, discussions on wetland impacts will use 48-foot depth alternative
 - Direct Impacts: 15.68 acres salt marsh
 - Indirect Impacts:
 - 337 acres of tidal freshwater conversion
 - +1067 acres of brackish marsh conversion
 - 730 acres of salt marsh conversion



BUILDING STRONG®

Final Compensatory Mitigation Rule and Wetland Impacts

- Functional assessment of impact sites and mitigation areas
- Watershed approach (considerations, information, site selection)
- Type and location of mitigation
- Responsible parties
- Timing
- Ecological Performance Standards
- Monitoring
- Adaptive Management
- Long term Management
- Financial Assurances and Protection



Direct Impacts to Wetlands



BUILDING STRONG®


Direct Impacts to Wetlands

Location (Channel Station)	Wetland Acres Affected by Excavation
<u>Refuge Lands</u>	
102+600 - GA	2.2
Kings Island Turning Basin- GA	0.8
<u>Non-Refuge Lands</u>	
88+000 - GA	3.4
70+000 - GA	0.8
Tidegate - GA	7.63
Tidegate - SC	0.85
Total	15.68



BUILDING STRONG®

Location of Direct Impacts to Wetlands

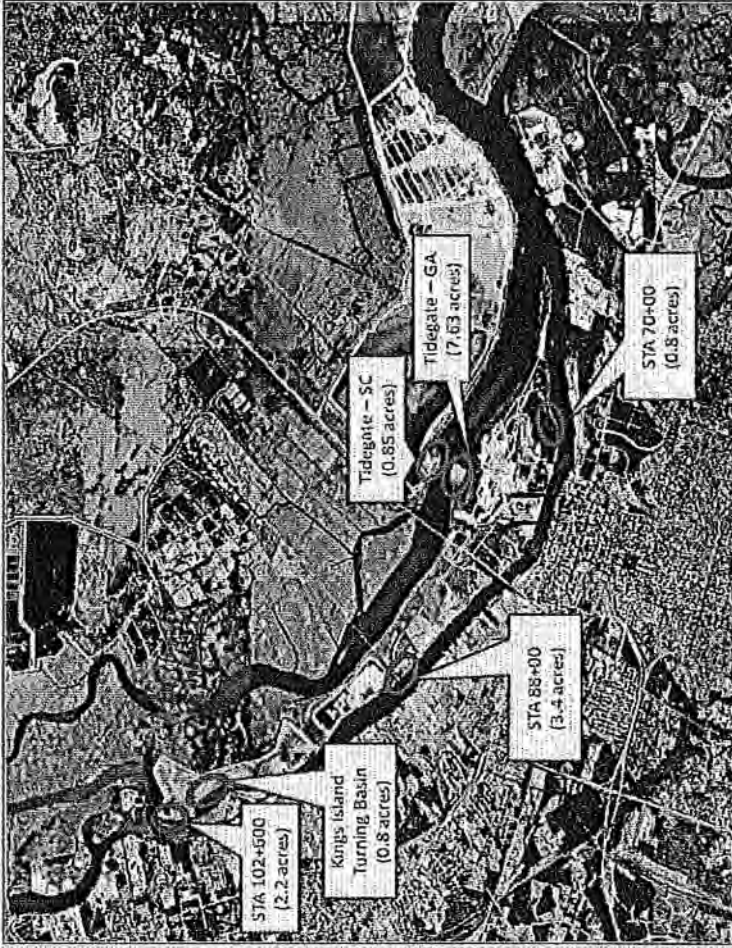


BUILDING STRONG®

Tidegate (SC) Impacts = 0.85 acres




BUILDING STRONG®


Tidegate (GA) Impacts = 7.63 acres

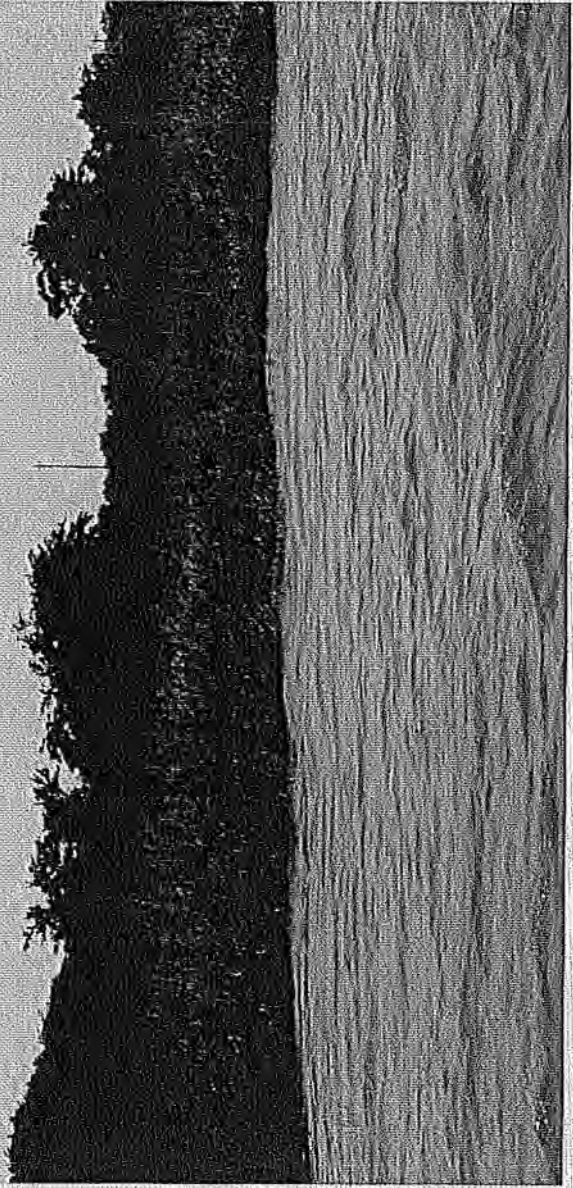

STA 70+000 Impacts = 0.8 acres

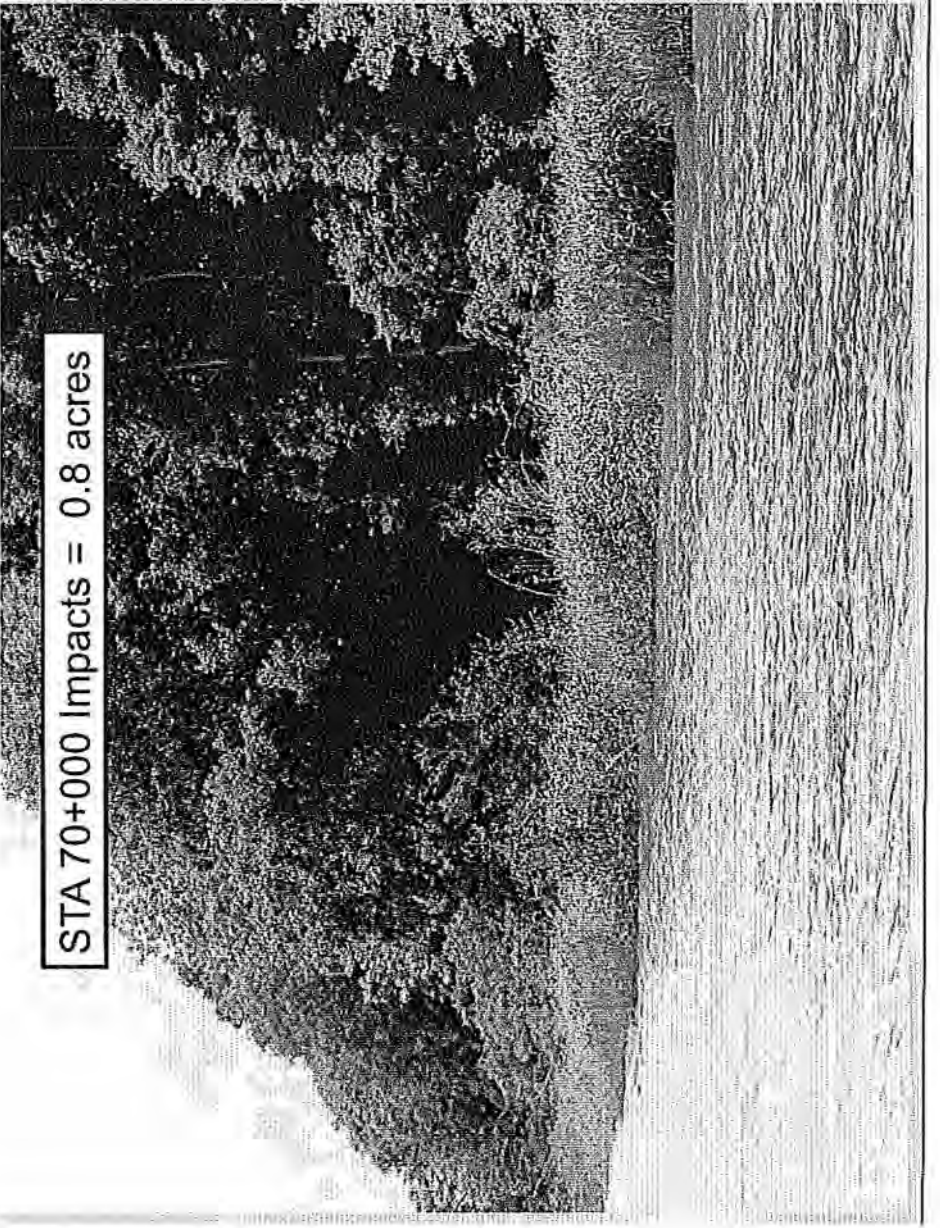


Location of Direct Impacts to Wetlands

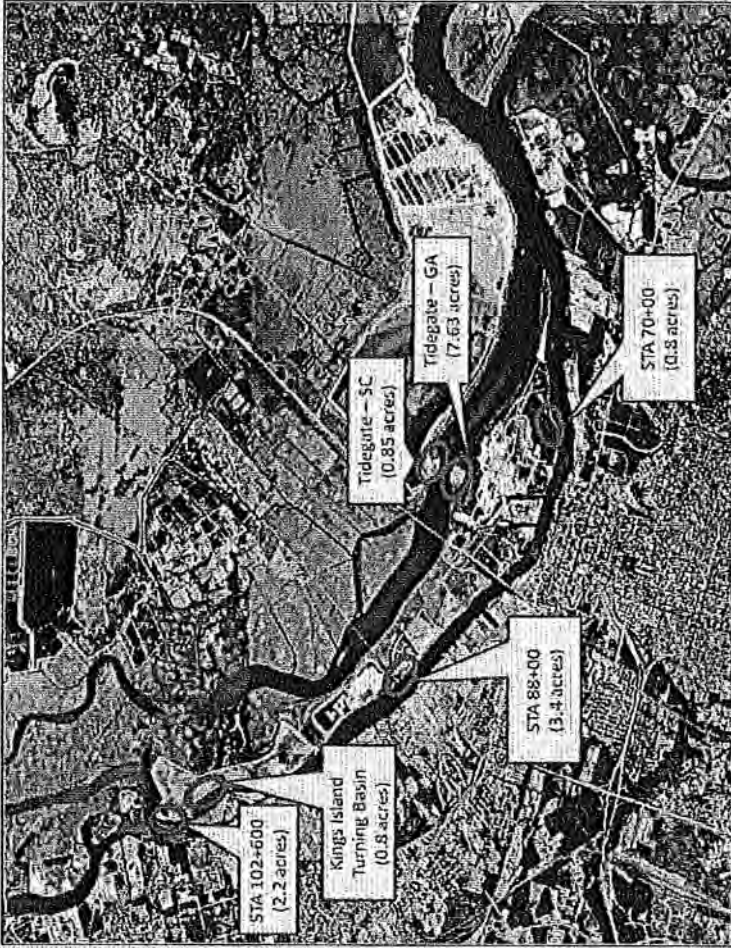


BUILDING STRONG®

STA 88+000 Impacts = 3.4 acres

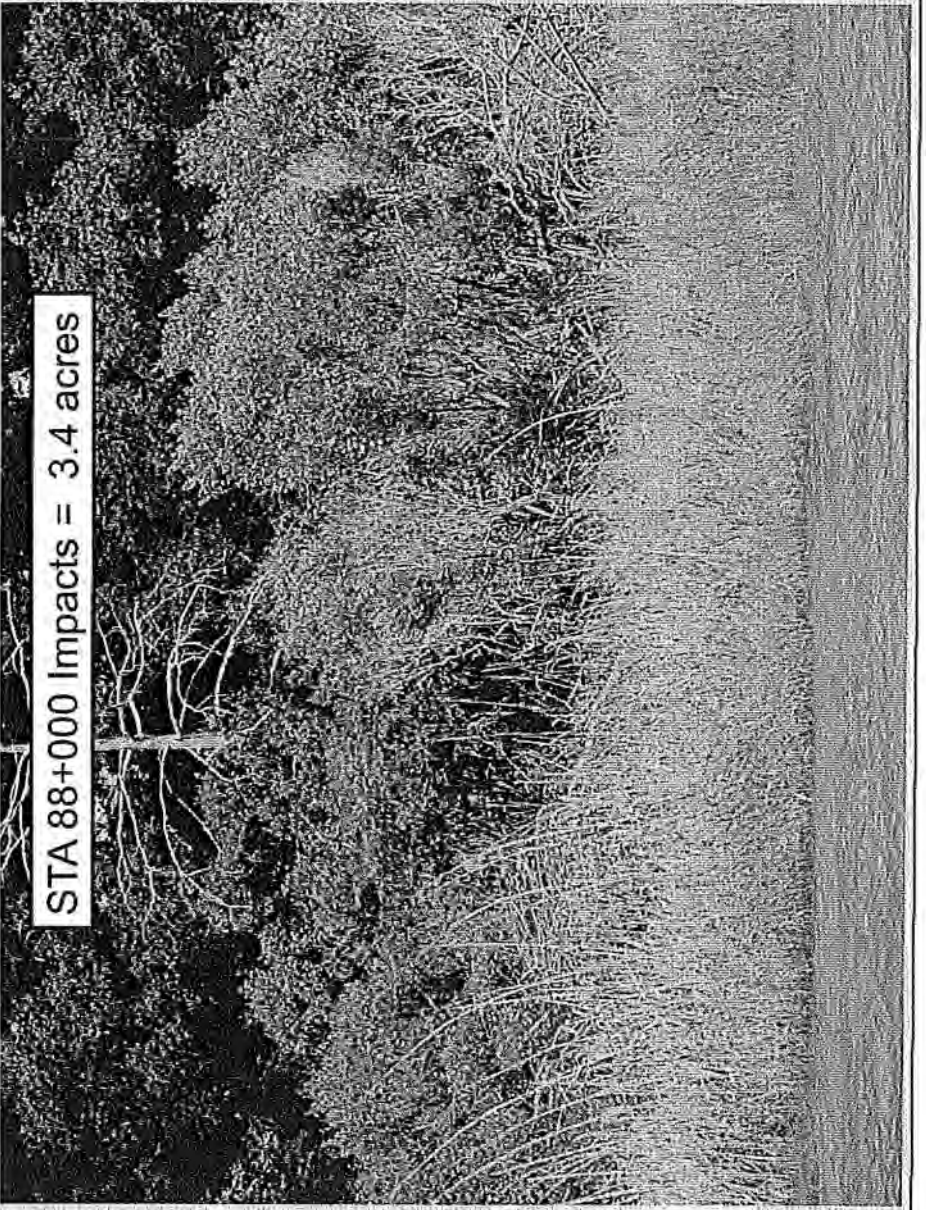


STA 88+000 Impacts = 3.4 acres



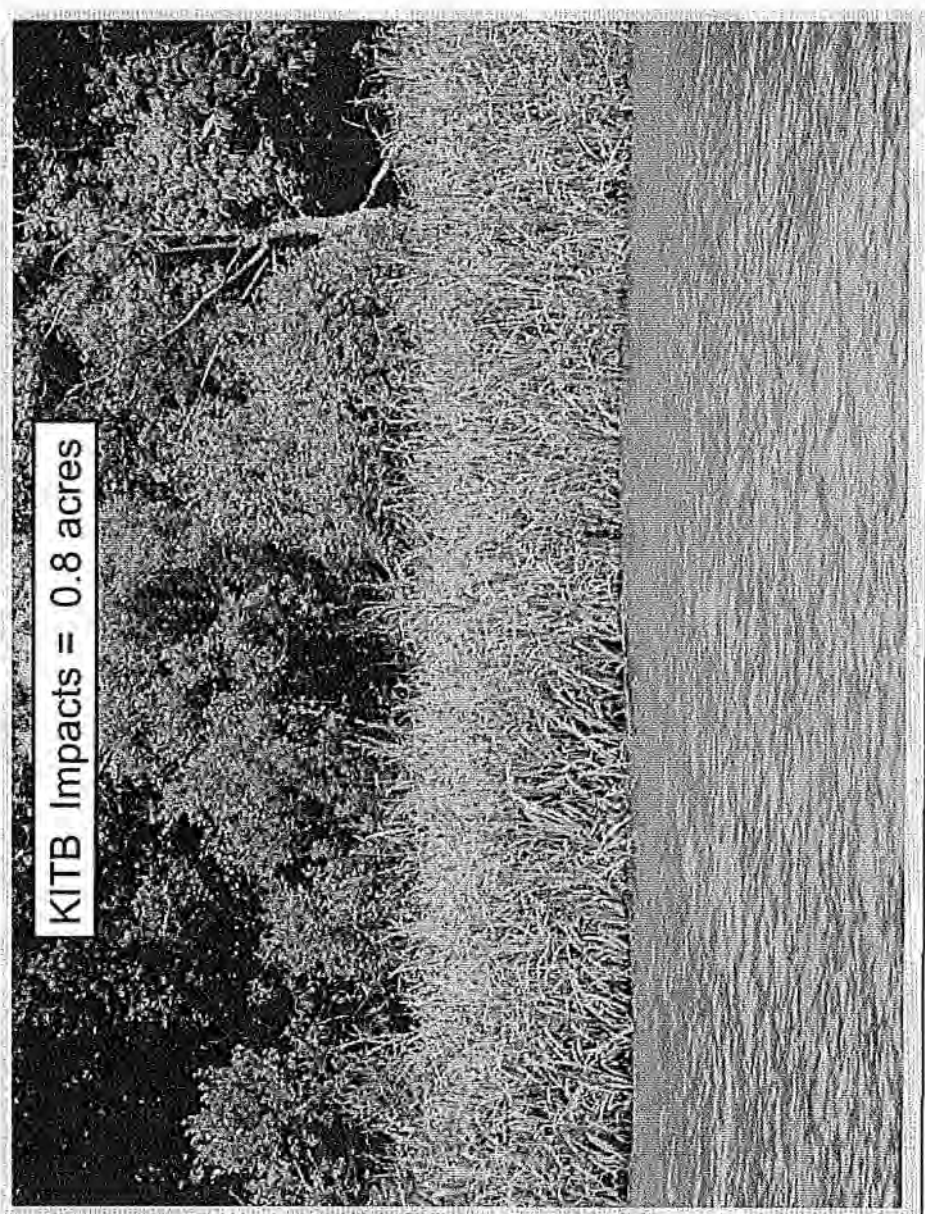

STA 102+000 Impacts = 2.2 acres

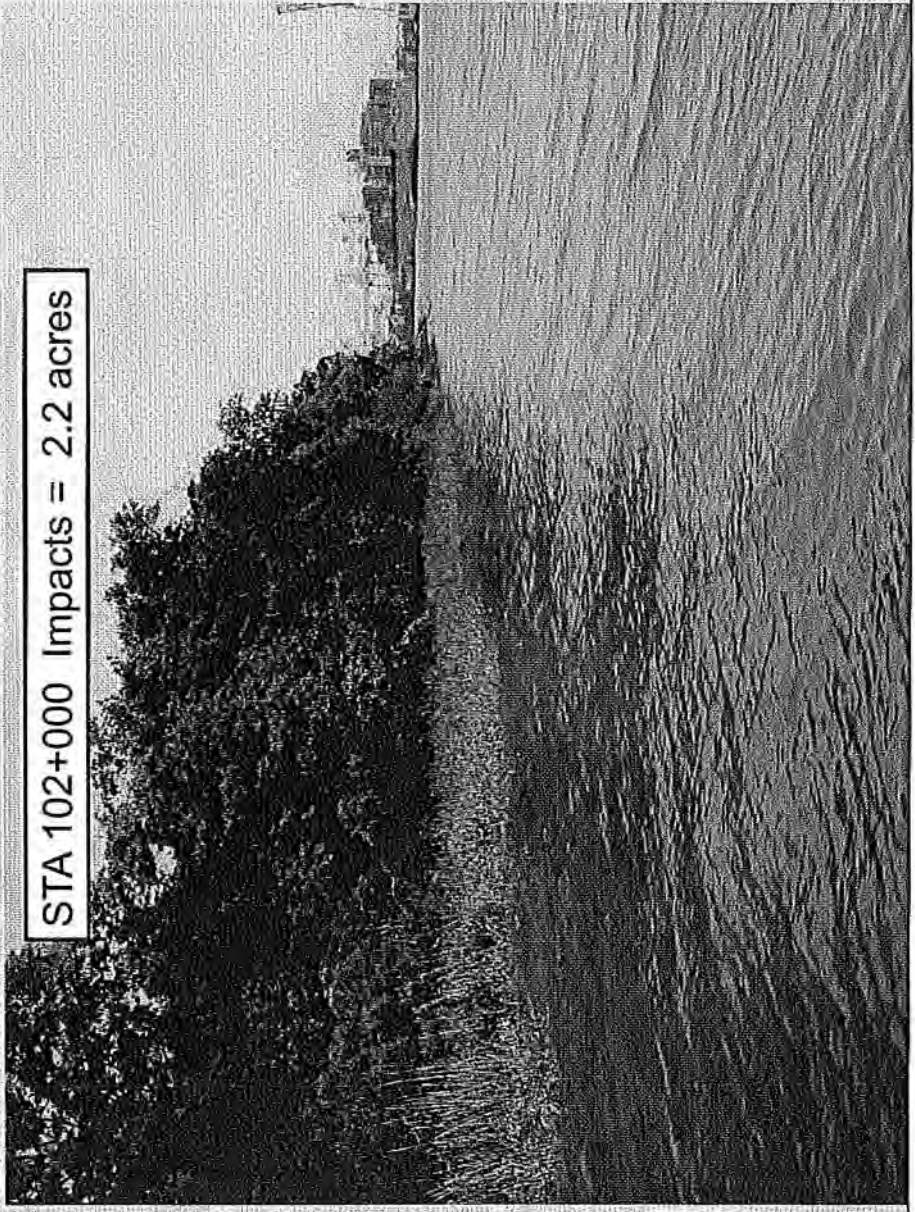

Changes in Wetland Function as a Result of Brackish Marsh Excavation

Elements of Wetland Function	Effect of Excavation on Wetland Function (15.68 acres)
Water Purification	Major Adverse (lost)
Flood Protection	Major Adverse (lost)
Shoreline Stabilization	Major Adverse (lost)
Groundwater Recharge	Major Adverse (lost)
Streamflow Maintenance	Major Adverse (lost)
Retention of Particles	Major Adverse (lost)
Surface Water Storage	Major Adverse (lost)
Subsurface Storage	Major Adverse (lost)
Nutrient Cycling	Major Adverse (lost)
Values to Society	Major Adverse (lost)
Fish and Wildlife Habitat	Major Adverse (lost)



BUILDING STRONG®

Mitigation for Direct Impacts

- Conducted watershed assessment
- Evaluated use of mitigation banks

Bank Name	Watershed	Acreage of Bank*	Status	USACE District
Salt Creek	Ogeechee-Coastal	98.9	Pending	Savannah
Tronox	Lower Savannah	88	Pending	Savannah
Vallambrosa	Ogeechee-Coastal	1,513	Pending	Savannah
Clydesdale Club	Lower Savannah	693	Pending	Charleston

* Acreage reflects total size of bank and may include additional habitat other than saltmarsh.


- Reviewed possible in-lieu fee option



BUILDING STRONG®


Mitigation for Direct Impacts

- “In Kind / In Basin” Restoration Opportunity

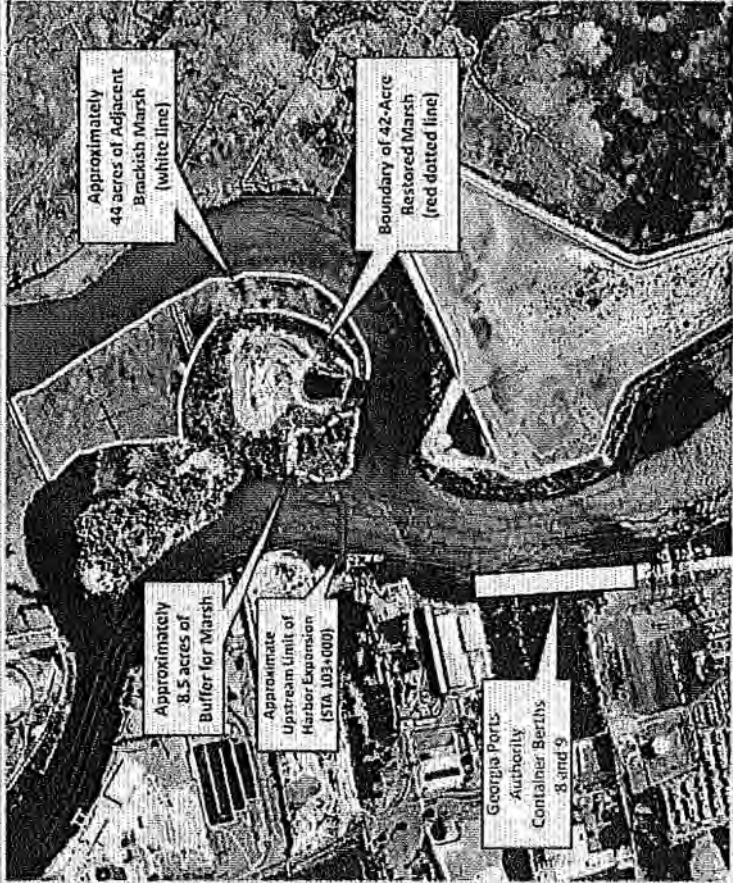

BUILDING STRONG®

Marsh Adjacent to DA 1S

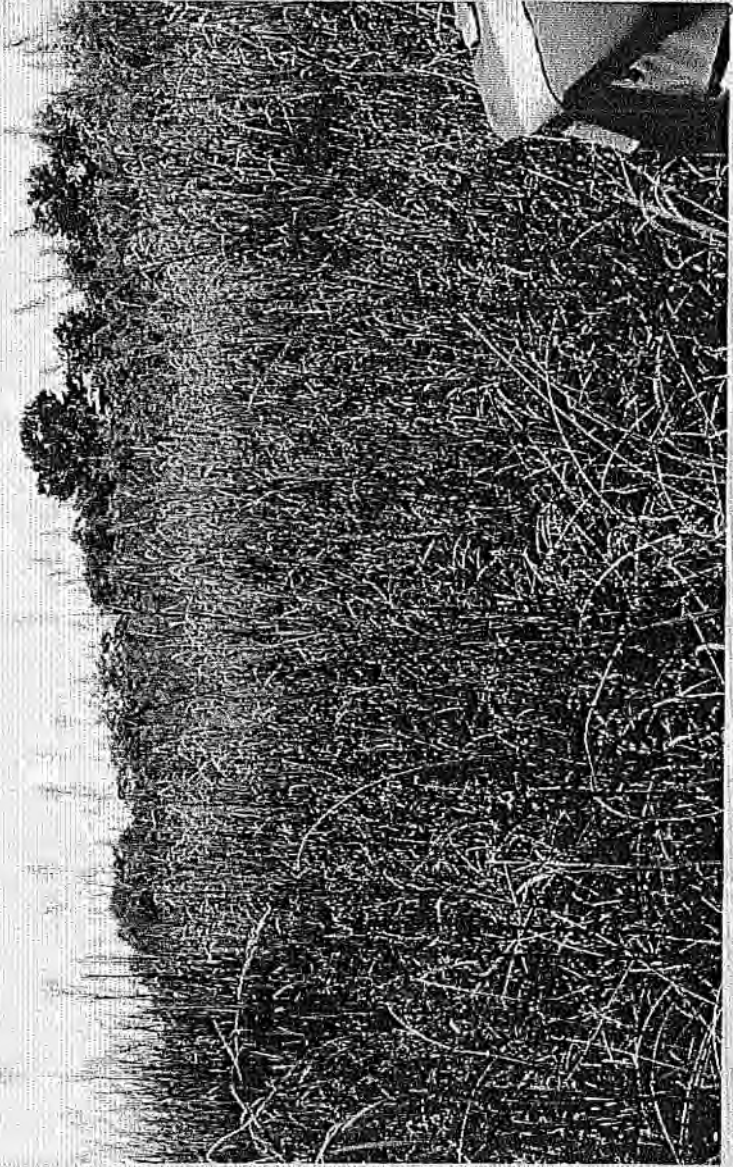

Amount of Compensatory Mitigation

- ICT participation and use of Savannah District SOP
- Restoration of 28.75 acres for the 15.68 acres of impact (1.8 to 1 mitigation ratio)
- Mitigation ratio consistent with RD requirements
- Restoration would encompass 1.7 acre marsh site previously restored by GPA
- Remaining 11.55 acres would be used for future harbor improvements and/or adaptive management



Example Regulatory Division Authorized Projects

Project Name	USACE File Number	Brackish Marsh Impacts (Acres)	Brackish Marsh Creation (Acres)	Mitigation Ratio (mitigation: Impact)
Slip One- Hutchinson Island	200501453	0.28	0.56	2:1
Hardin Canal Drainage	200600393	0.27	0.54	2:1
Skidaway Narrows Emergency Access	200600909	0.56	0.56	1:1
Skidaway Road Drainage Improvements	200601249	0.52	0.75	1.4:1
SLNG-Slip Construction	200200640	3.24	7.5	2.3:1



BUILDING STRONG®

Site Selection for “In Kind / In Basin” Restoration

- USFWS required “In Basin” mitigation for impacts
 - Site located in close proximity to impacts
 - Previously existed as brackish marsh with continuity to adjacent marsh
 - One large contiguous marsh vs. multiple sites
 - Site in area of Lower Savannah River Watershed that supports a brackish marsh ecosystem
 - Site is upriver of major Port of Savannah activities
 - Located within designated boundaries of SNWR (compatible with adjacent land use)



Responsible Parties and Timing

- Savannah District will be responsible for implementation, performance, and long-term management of the brackish marsh site.
- The Wetland ICT (USEPA, USFWS, NOAA, GADNR-CRD, SCDNR, SCDHEC-OCRM) will receive annual reports on the status of the mitigation project. Also, Savannah District will work with ICT to implement any Adaptive Management plans.
- Savannah District has committed to construction of the restored marsh concurrently with dredging in the Inner Harbor.



Ecological Performance Standards

- Developed so that mitigation project can be objectively evaluated to determine if it is developing into the desired resource type.
- Grade down Disposal Area 1S; allow *in situ* Spartina seed stock to vegetate site.
- Successful restoration will be determined based on following table.

Revegetation Rate for Restored Marsh	
Time Period	Percent Vegetative Cover
Construction	0
Year 1	15
Year 2	25
Year 3	40
Year 4	60
Year 5	80



BUILDING STRONG®

Monitoring Restored Marsh Site

- Restored Marsh will be monitored for a period of five years.
- Ten, 30-foot transects established on site and one in adjacent reference marsh; Vegetative counts and density measurements.
- Success based on meeting or exceeding the percent vegetative cover on previous slide.
- ICT will be provided with annual reports documenting the success of the restored marsh site.



BUILDING STRONG®

Site Protection

- Corps and GDOT will relinquish sediment disposal easement on Disposal Area 1S.
- Restored brackish marsh ecosystem will be permanently protected through the State of Georgia's Coastal Marshlands Protection Act.
- Restored marsh is within boundaries of SNWR. Thus, permanently integrated into SNWR's conservation and management plan.



Adaptive Management

- Site inspected twice annually. If it does not naturally revegetate as indicated in performance standards, then site will be planted with *Spartina*.
- If invasive species are identified, then they will be removed from the site.
- If percent colonization not achieved, site would be sprigged or then purchase salt marsh mitigation credits from approved bank.
- Wetland ICT will be provided annual monitoring reports and consulted annually to provide input and recommendations.



Long Term Management

- Plan includes description of long-term needs, annual cost estimates and management responsibility.
- After revegetation, brackish marsh would be self-sustaining.
- Restoration area already within boundaries of SNWR and contiguous with existing marsh. As such, restored site would be managed by USFWS and integrated into the same long-term management plan that currently protects the SNWR as defined in the National Wildlife Refuge System Improvement Act of 1997.



Indirect Impacts to Wetlands



BUILDING STRONG®

Model Used to Evaluate Vegetative Shifts Associated Changes in Salinity

- EFDC Model used to determine changes in salinity and associated influence over marsh areas
 - 0.0 – 0.5 ppt Tidal Freshwater Wetland
 - > 0.5 – 4 ppt Brackish Marsh
 - > 4 ppt Salt Marsh
- Model Used to Analyze all Depth Alternatives
- Use 48' Depth Alternative as Example



Indirect Impacts Without Flow Diversion

Wetland Type	48-Foot Depth (Wetland Conversion)
Freshwater Wetlands (< 0.5 ppt salinity)	1,212 acres
Salt Marsh (> 4 ppt salinity)	0 acres



Salinity: Existing Conditions and Post-Deepening




Lines indicate
limits of
0.5 ppt salinity



BUILDING STRONG®

Flow Diversion Plan 6A

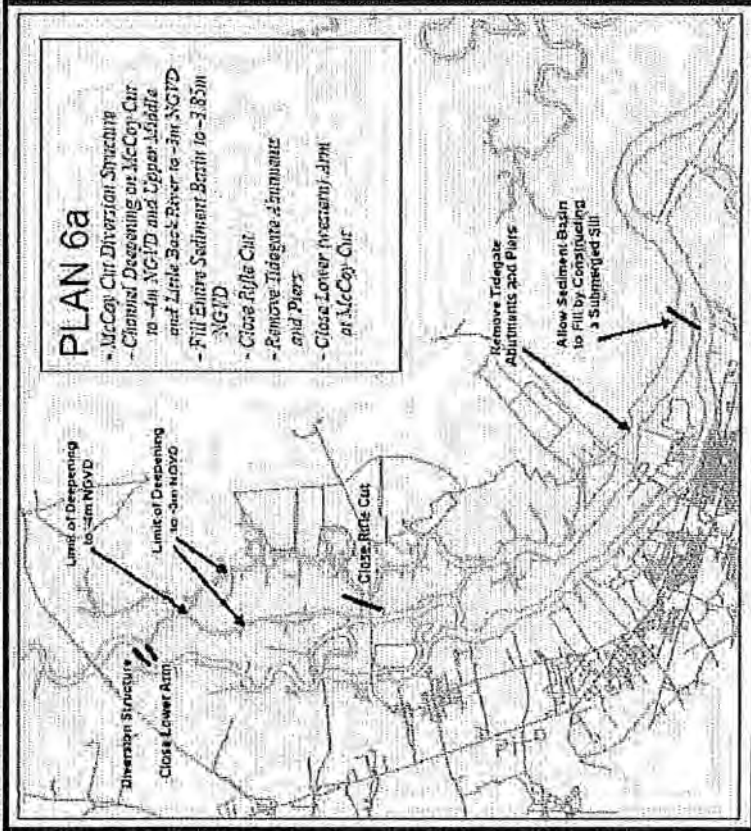

BUILDING STRONG®

Indirect Impacts With Flow Diversion 6A

Wetland Type	48-Foot Depth (Wetland Conversion)
Freshwater Wetlands (< 0.5 ppt salinity)	337 acres
Salt Marsh (> 4 ppt salinity)	730 acres



BUILDING STRONG®


Salinity: Existing Conditions and
Post-Deepening with Flow Diversion
Plan 6A



Lines indicate
limits of
0.5 ppt salinity




BUILDING STRONG®

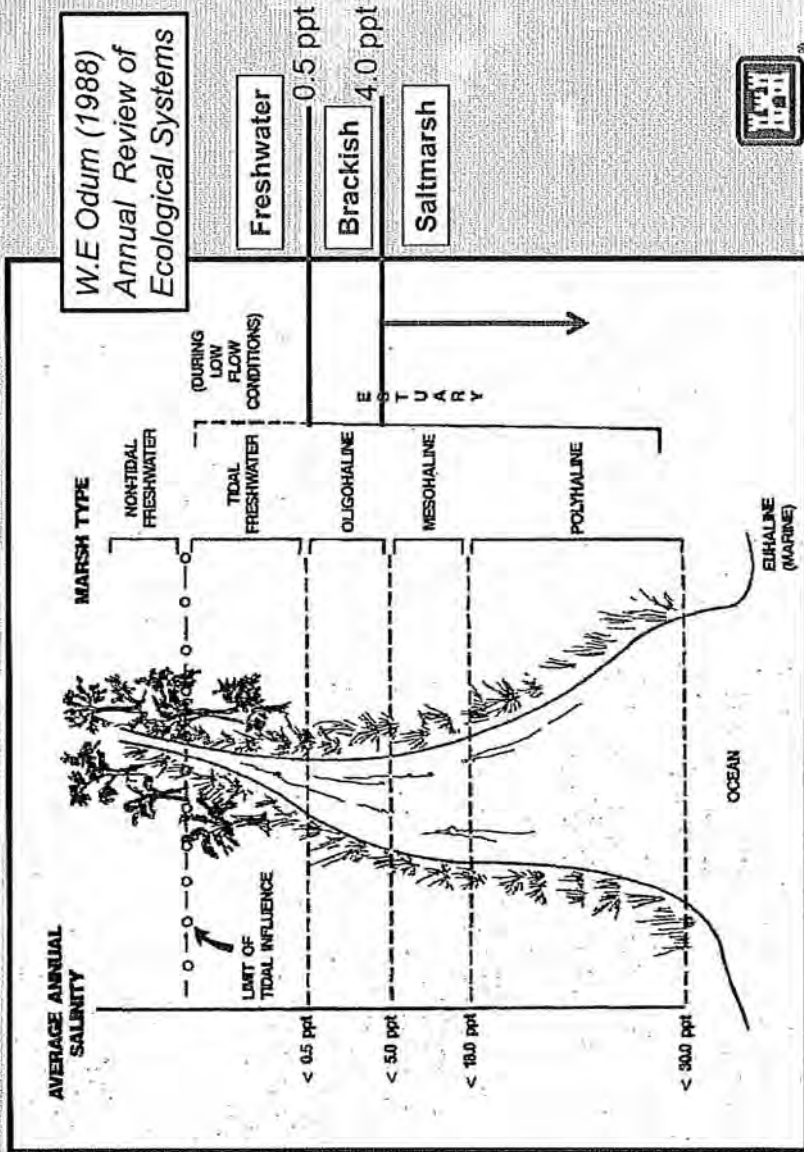

BUILDING STRONG®

Existing 42 ft Depth

No Deepening, No Mitigation

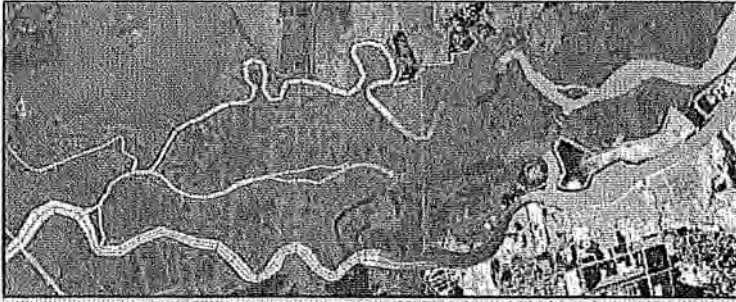


48 ft Depth

6 ft Deepening, Flow Diversion 6A



Surface Salinity (ppt)

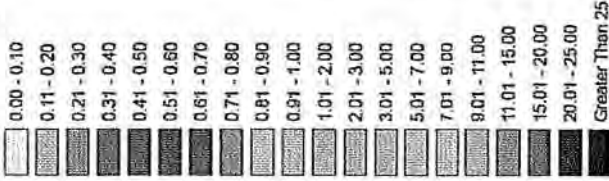


BUILDING STRONG®

Change in Salinity Following Harbor Deepening



**48 ft Channel Depth
6 ft Deepening, Mitigation 6A**
Surface Salinity Difference (ppt)



Negative values indicate a reduction
in river salinity.



BUILDING STRONG®

Comparison of Physical Characteristics in Tidal Freshwater Marsh and Salt Marsh

W.E Odum (1988)
Annual Review of
Ecological Systems



BUILDING STRONG®

Table 1 Comparison of physical characteristics between tidal freshwater marshes and salt marshes

	Tidal freshwater marsh	Salt marsh
Location	Head of the estuary (above the oligohaline zone)	Mild and lower estuary
Geographical distribution	Worldwide, usually associated with rivers	Worldwide, not always associated with rivers
Salinity	Annual average below 0.5 ppt	Annual average between 18.0 and 35.0 ppt
Tidal range	Ocean-derived lunar tide, often greater amplitude than nearby salt marshes	Ocean-derived lunar tide
Sediments	Silt-clay, high organic content, low-moderate root and peat content	More sand, lower organic content, higher peat and root content
Sediment erodability	High erodability (particularly in the low marsh)	Generally lower erodability
Streambank morphology	Low gradient, little undercutting	Steeper gradient, more undercutting
Stream channel morphology	Low sinuosity	Moderate to high sinuosity
Dissolved sulfur	Trace (approximately 1 ppm)	Very high (approximately 2500 ppm)
Sediment redox potential	Moderate to strongly reducing (multiple redox pairs)	Strongly reducing (sulfur redox pairs most important)
Reduced iron-sulfur compounds	Rare or absent	Plentiful
Dissolved and particulate organic carbon	High concentrations	Moderate to low concentrations

Percent of Vegetation Correctly Classified by Environmental Variables

Latham et. al. Wetlands 1994

Table 2. Discriminant analysis results of vegetation classes from freshwater, oligohaline, strongly oligohaline, and mesohaline sites on the lower Savannah River. Wilk's-Lambda = 0.18; $F = 1743.28$; $DF = 3/1144$; $P = 0.0001$.

A. Classification matrix.

Class	Percent Cases Correctly Classified by Site			
	Fresh	Oligo-haline	Strongly Oligohaline	Meso-haline
Fresh	87	13	0	0
Oligohaline	37	47	17	0
Strongly oligohaline	9	13	68	9
Mesohaline	0	2	19	79

Proportion of correct classifications between sites = 70%

"Overlap between adjacent classes was high; non-neighboring classes did not seem to overlap. Percent of vegetation correctly classified by environmental variables was 87%, 47%, 68%, and 79% for freshwater, oligohaline, strongly oligohaline and mesohaline, respectively."



BUILDING STRONG®

Percent Organics at Different Marsh Sites

Table 3-3. Mean percent organics of marsh sediments in relation to distance from primary canals, using repeated measures analysis of variance. H_0 : Mean percent organics are equal for each site between dates. (Designations "A" = 20 m, "B" = 70m, "C" = 120m.).

Site	N	Mean Percent Organic			p	Significance
		A	B	C		
0.5 ppt +/- 0.2	90	0.47	0.59	0.62	0.0390	Reject, lower at "A" points
1.3 ppt +/- 1.1	87	0.44	0.50	0.52	0.1181	ns
2.0 ppt +/- 1.2	90	0.29	0.42	0.45	0.0044	Reject, lower at "A" points
7.5 ppt +/- 1.7	90	0.31	0.34	0.33	0.8042	ns
	72	0.57	0.65	0.67	0.0091	ns
	72	0.33	0.59	0.67	<0.0001	Reject, lower at "A" points
	72	0.47	0.68	0.57	0.1176	ns

Dusek and Kitchens
Technical Report (2002)



BUILDING STRONG®

Spatial Patterns in Fish Distribution

Jennings and Weyers (2003)

Polyhaline (>15 ppt)				Mesohaline (5-15 ppt)				Oligohaline (1-5 ppt)				Tidal Freshwater (<1 ppt)			
F	W	Sp	Su	F	W	Sp	Su	F	W	Sp	Su	F	W	Sp	Su
141	324	724	3731	1297	1165	9582	14147	2953	4616	5448	6264	1627	3401	7967	4071
TOTAL: 4,920				TOTAL: 26,191				TOTAL: 19,281				TOTAL: 17,066			

Temporal and Spatial Distribution of Estuarine-Dependent Species in the Savannah River Estuary July 2000-December 2002.

90% of catch were estuarine generalist fish species: Bay Anchovy, Atlantic menhaden, Atlantic croaker, spot, other drum species, gobies, blueback herring, Southern flounder, and striped mullet.


91 fish species identified throughout most habitat types



BUILDING STRONG®

Fish Density and Species Richness in Tidal Creeks

Jennings and Weyers (Feb 2002) Annual Report
Temporal and Spatial Distribution of Estuarine-Dependant Species

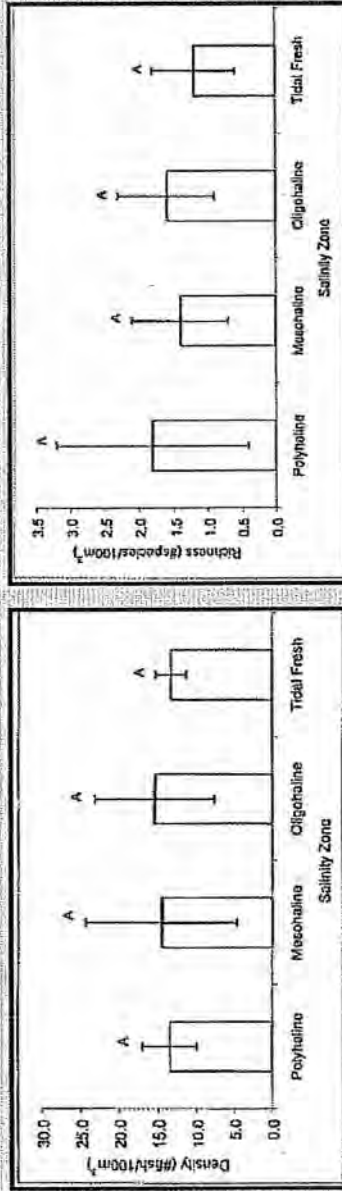

Tidal Freshwater (0-1 ppt); Oligohaline (1-5 ppt); Mesohaline (5-15 ppt); Polyhaline (> 15 ppt)


Figure 5. Mean fish density ($\pm$ st. dev.) and species richness ($\pm$ st. dev.) for ichthyoplankton surveys conducted in the four salinity zones from September 2000 to August 2001. Different letters denote means that were significantly different.



BUILDING STRONG®

Fish Density and Species Richness Along Marsh Edge

Jennings and Weyers (Feb 2002) Annual Report
Temporal and Spatial Distribution of Estuarine-Dependant Species

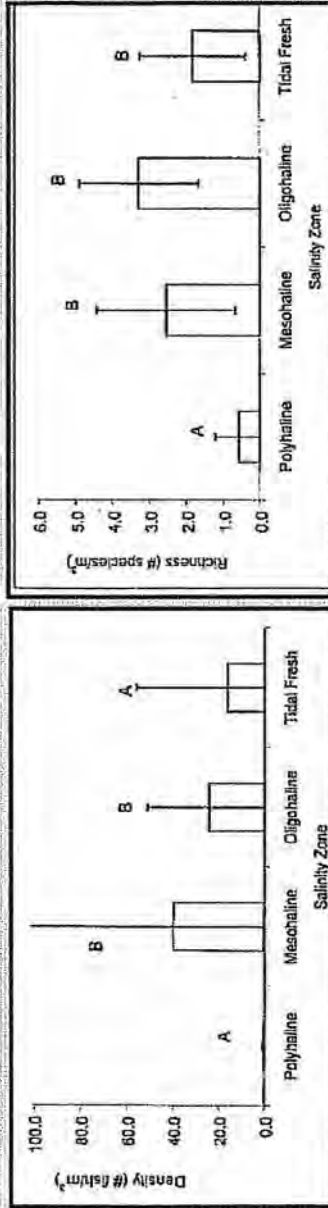

Tidal Freshwater (0-1 ppt); Oligohaline (1-5 ppt); Mesohaline (5-15 ppt); Polyhaline (> 15 ppt)

Figure 9. Mean fish density ($\pm$ st. dev.) and species richness ($\pm$ st. dev.) for marsh-edge drop surveys conducted in the four salinity zones from October 2000 to September 2001. Different letters denote means that were significantly different.



BUILDING STRONG®

Changes in Wetland Function as A Result of Marsh Conversion

(Wetland ICT Procedures: Greater Vegetative Diversity is Beneficial)

Elements of Wetland Function	Freshwater to Brackish Marsh (337 acres)	Saltmarsh to Brackish Marsh (730 acres)
Water Purification	Negligible	Negligible
Flood Protection	Negligible	Negligible
Shoreline Stabilization	Negligible	Negligible
Groundwater Recharge	Negligible	Negligible
Streamflow Maintenance	Negligible	Negligible
Retention of Particles	Negligible	Negligible
Surface Water Storage	Negligible	Negligible
Subsurface Storage	Negligible	Negligible
Nutrient Cycling	Negligible	Negligible
Values to Society	Negligible	Negligible
Fish and Wildlife Habitat	Minor Adverse	Minor Beneficial



BUILDING STRONG®

Changes in Wetland Function as A Result of Marsh Conversion

(Recent Corps Analysis: Salinity Shifts + Data and Literature Review)

Elements of Wetland Function	Freshwater to Brackish Marsh (337 acres)	Saltmarsh to Brackish Marsh (730 acres)
Water Purification	Negligible	Negligible
Flood Protection	Negligible	Negligible
Shoreline Stabilization	Negligible	Negligible
Groundwater Recharge	Negligible	Negligible
Streamflow Maintenance	Negligible	Negligible
Retention of Particles	Negligible	Negligible
Surface Water Storage	Negligible	Negligible
Subsurface Storage	Negligible	Negligible
Nutrient Cycling	Negligible	Negligible
Values to Society	Negligible	Negligible
Fish and Wildlife Habitat	Minor Adverse	Negligible



BUILDING STRONG®

Indirect Impacts: Watershed Assessment to Identify Appropriate Mitigation Options

- Evaluated use of Mitigation Banks:
 - No mitigation banks with credits derived from tidal freshwater wetlands.
- Evaluated use of In Lieu Fee Program
- A perceived high risk of failure for created tidal freshwater wetland systems. USFWS determined not sustainable, and therefore, not viable alternative.



Watershed Approach to Identify Appropriate Mitigation: *Existing Watershed Plan*

- GA DNR-EPD's (2001) Savannah River Basin Management Plan
- Long-term priorities for Lower Savannah River Basin
 - *Preserving habitat suitable for the support of healthy aquatic and riparian ecosystems*



Watershed Approach: Considerations

- Identified 20+ considerations in revised EIS
 - Functional Assessment
 - Landscape position, resource type, location, inventory of resources
 - Growth/Land Use Conversion in Lower Savannah River Watershed
 - In SRE, Savannah National Wildlife Refuge (SNWR) is conservation area of national importance
 - Development adjacent to SNWR boundaries could directly/indirectly impact fish/wildlife habitat, wetlands, and water quality



BUILDING STRONG®

Watershed Approach: *Information Needs*

- Evaluated Watershed Condition and Needs
 - Wetland ICT Coordination and identification of properties in F&W Coordination Act Report
 - Functional Assessment
 - Trends in habitat loss, cumulative impacts, development trends
 - ✓ Development within 5 miles of SNWR
 - ✓ Impaired Waters in Lower Savannah River Watershed and SNWR
 - Presence and needs of sensitive species




Watershed Approach: Site Selection

- Site must be suitable for providing the desired aquatic resource function
 - Comparative wetland analysis: wetland threats, fish and wildlife function, opportunities for mitigation, and long-term sustainability
 - Watershed scale features (aquatic habitat diversity and connectivity)
 - Size and location of compensatory mitigation relative to hydrologic resources.
 - Reasonably foreseeable effects the project will have on aquatic and terrestrial resources



Savannah Island National Wildlife Refuge Acquisition Boundary

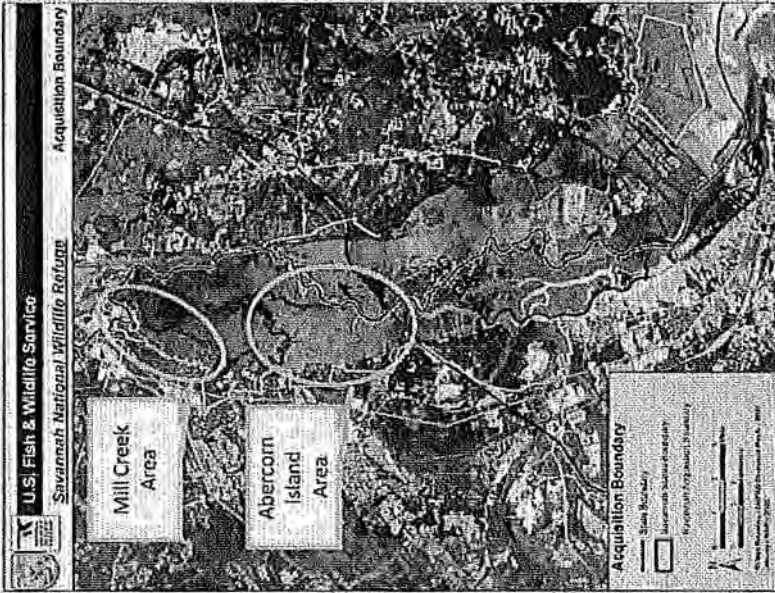

SNWR


Existing Boundary
and
Acquisition Boundary
and
Proposed
Mitigation Areas



BUILDING STRONG®

Preservation Sites

(Mitigation for Indirect Impacts)
2,683 acres for Preservation

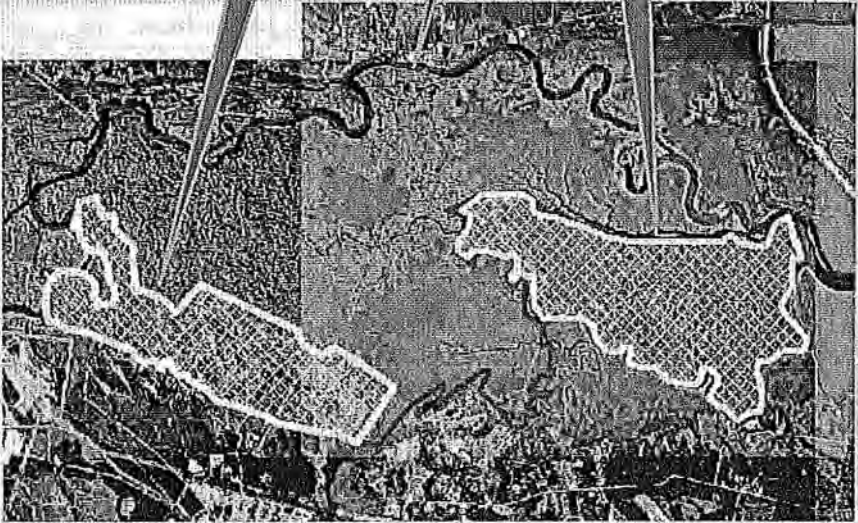

BUILDING STRONG®

Abercorn Island Area


1,989 Acres of Wetland
0 acres of Upland

National Wetland
Inventory GIS Layer -

Wetland Classifications
For Abercorn Island Area:

PFO1A
PFO6F
PFO1C

Functional
assessment of wetland
preservation areas and
detailed characterization
of wetland types/habitats
is located in Appendix C

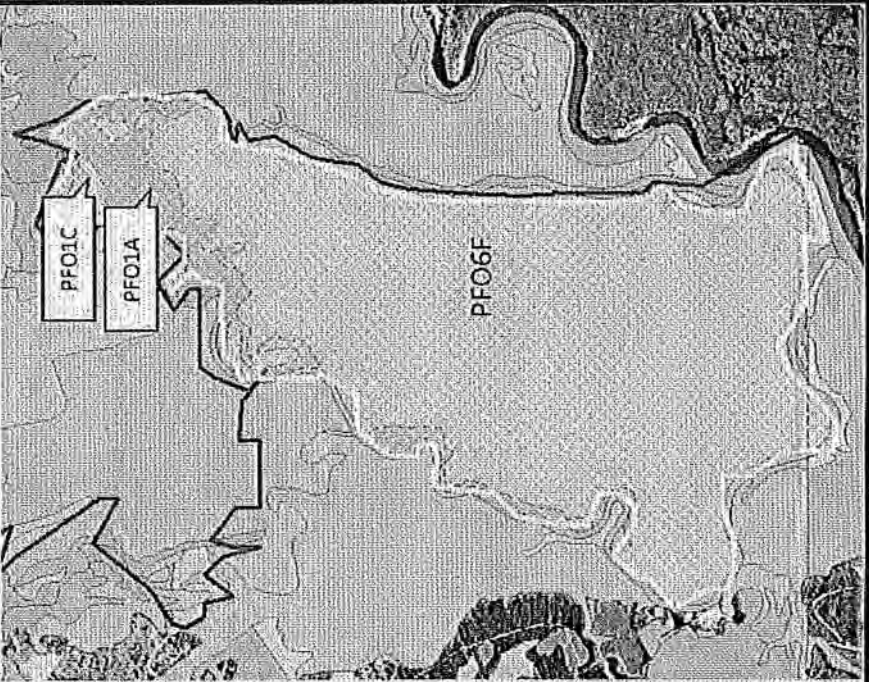

Mill Creek Area

877 acres of Wetland
135 acres of Upland

National Wetland
Inventory GIS Layer –

Wetland Classifications
For Mill Creek Area:

PFO1A

PSS1A

PFO1

Functional assessment
of wetland preservation
areas and detailed
assessment of
wetland types/habitats
is located in Appendix C.



BUILDING STRONG®

Watershed Approach: Mitigation Type and Amount

- Corps recent watershed evaluation and functional assessment confirmed that out-of-kind compensatory mitigation will serve aquatic resource needs of the watershed
- Wetland ICT agreed to use Savannah District SOP as a tool (i.e., suitable metric) to determine how much compensatory mitigation would be required
- Preservation of 2,683 acres is sufficient to replace the impacts to aquatic function that were previously discussed



SOP Worksheets

ADVERSE IMPACT WORKSHEET					
		FRESHWATER MARSH	BRACKISH MARSH	SALT MARSH	
		SALINITY ZONE			
	RANGE	0 to 0.5	0.6 to 4.0	> 4.0	
Dominant Effect	2.0 to 0.5	0.5		0	
Duration of Effects	2.0 to 0.1	2		2	
Existing Condition	2.0 to 0.1	2		1.8	
Lost Kind	2.0 to 0.1	2		2	
Preventability	2.0 to 0	0.5		0.5	
Rarity	2.0 to 0.1	2		0.1	
Sum		9		6.4	
Impacted Acreage		337		730	
Impact Total		3033		4672	
TOTAL					7705



BUILDING STRONG®

RESTORATION WORKSHEET					
	FRESHWATER MARSH	BRACKISH MARSH	SALT MARSH		
	SALINITY ZONE				
	0 to 0.5	0.6 to 4.0	> 4.0		
RANGE					
Net Improvement - Vegetation	0.1 to 1.4	1.4			
Net Improvement - Hydrology	0.1 to 1.4				
Credit Schedule	0 to 0.4	0.4			
Kind	0.2 to 0.6	0.6			
Maintenance	0 to 0.3	0.2			
Monitoring	0 to 0.4	0.2			
Control	0.1 to 0.5	0.5			
Sum		4.2			
Restored Acreage Salinity Zone		1068 0.6 to 4.0			
Restoration Total		4485.6			
TOTAL					4485.6



BUILDING STRONG®

Responsible Parties and Timing

- The Corps would acquire 2,683 acres of land identified in the SNWR's Comprehensive Conservation Plan
- Provide the land to USFWS to manage as additions to the SNWR
- Properties would be acquired prior to or concurrent with the activity that results in conversion of wetland



BUILDING STRONG®

Protection and Long Term Management of Preservation Sites

- The 2,683 acres of Abercorn Island and Mill Creek become part of SNWR
- Managed by USFWS
- Lands would be subject to same protections and use requirements as defined in the National Wildlife Refuge System Improvement Act of 1977 and the SNWR's Comprehensive Conservation Plan



BUILDING STRONG®

Monitoring Marsh Conversion Areas

- Establish 10 monitoring sites in areas subject to vegetative conversion.
- An upriver freshwater site and downriver brackish marsh site will be selected as reference sites
- Sample stations: record water surface elevation, specific conductance of surface waters and interstitial waters, and depth every 30 minutes (downloaded monthly).
- Twice annual vegetation counts - six transects per site (species and stem density)
- Monitor: 1 year pre-construction, 3-4 years during construction, and an additional 5 years post construction
- Wetland ICT provided with annual reports that document findings



Location of Monitoring Sites



BUILDING STRONG®

Adaptive Management

- **Monitoring of marsh sites:**
 - Wetland ICT will be provided annual monitoring reports and consulted frequently for input and recommendations
 - If vegetative conversion extends beyond limits of monitoring, then will establish more sampling sites to determine margins of conversion
 - Additional wetland preservation will be acquired if model results are under predicted.



Summary for Direct Impacts

- Direct impacts to 15.68 acres of brackish marsh result in major adverse impact to all wetland functions
- Restoration of 28.75 acres of brackish marsh at DA 1S is appropriate mitigation and ratio is similar to regulatory projects requiring brackish/salt marsh mitigation
- Monitoring and adaptive management plans are sufficient to ensure “no net loss of aquatic resources”
- Wetland ICT will be active participants in all phases of site development, monitoring, adaptive management, etc.



BUILDING STRONG®

Summary for Indirect Impacts

- Small changes in salinity relative to dynamics of freshwater, oligohaline and mesohaline systems in SRE
- A majority of the areas that experience vegetative shifts will still retain a percentage of pre-project vegetation
- Functional assessment for conversion of freshwater to brackish marsh resulted in negligible impacts to wetland functions with a minor adverse impact to fish and wildlife habitat.
- Functional assessment for conversion of salt marsh to brackish marsh resulted in negligible impacts to all wetland functions
- Mitigation options were considered using a watershed approach with consideration of impacts to wetland function



Summary for Indirect Impacts (Continued)

- Preservation of 2,683 acres of bottomland hardwood and emergent wetland adjacent to SNWR is adequate mitigation for impacts to fish and wildlife habitat
- Proposed monitoring of marsh areas susceptible to vegetative conversion is a long term commitment by Corps to ascertain effects associated with changes in salinity.
- Adaptive management plan includes the purchase of additional properties to further benefit fish and wildlife habitat adjacent to SNWR.
- Wetland ICT will be active participants in all phases of plan review, monitoring, adaptive management, etc.



Final Compensatory Mitigation Rule and Wetland Impacts

- ✓ Functional assessment of impact sites and mitigation areas
- ✓ Watershed approach (considerations, information, site selection)
- ✓ Type and location of mitigation
- ✓ Responsible parties
- ✓ Timing
- ✓ Ecological Performance Standards
- ✓ Monitoring
- ✓ Adaptive Management
- ✓ Long term Management
- ✓ Financial Assurances and Protection



BUILDING STRONG®

Next Steps

- Corps will respond to agency comments in Final EIS
- New information will be included in Final EIS
- Final EIS will receive agency and public review at end of 2011



BUILDING STRONG®

NAME	ORGANIZATION	PHONE	EMAIL
Mackie McIntosh	USACE, Savannah Dist	912-652-5520	mac-gard.mcmintosh@usace.army.mil
Jeddy King	USACE, Savannah Dist	678-422-1951	jeddy.king@usace.army.mil
William Bailey	"	912-652-5781	
Heinz Mueller	USEPA	404-562-9511	mueller.heinz@epa.gov
Jennifer Wette	GA EPD	675-1752 404-562-9057	jennifer.wette@dnr.state.ga.gov
Bill Melville	USEPA	404-562-9266	MELVILLE.WILLIAM@epa.gov
Bob Lord	EPA	404-562-9408	lord.bob@epa.gov
Jennifer Derby	EPA	404-562-9401	derby.jennifer@epa.gov
Annie Godfrey	EPA	404-562-9967	godfrey.annie@epa.gov
Joyce Stanley	DOI(OEPC)	404-331-4524	joyce-stanley@ios.doi.gov
PAUL GAGLIANO	EPA	(404) 562-9373	gagliano.paul@epa.gov
Keith Parsons	GA EPD	404-675-1631	keith.parsons@dnr.state.ga.us
Dale Caldwell	GA EPD	912-261-3924	dale.caldwell@dnr.state.ga.us
Chuck Hayes	USFWS	843-784-8911	chuck.hayes@fws.gov
Jane Griess	USFWS	843-784-9911	Jane.Griess@fws.gov
Bill Wikoff	USFWS	912-832-8739	bill.wikoff@fws.gov
Liz Booth	GA EPD	404-675-1675	elizabeth.booth@dnr.state.ga.us
Kathleen Preston	SCDHEC	803-818-3105	presthsk@dnr.sc.gov
Barbara Neale	SCDHEC	843-457-0245	nealeb@dnr.sc.gov
Chris Beckham	SCDHEC	803-818-4261	beckhamc@dnr.sc.gov
William N. Williams	SCDHEC	843-953-0832	williamw@dnr.sc.gov

Bailey, William G SAS

From: Bailey, William G SAS
Sent: Friday, June 03, 2011 3:23 PM
To: 'Heather Preston'
Subject: Savannah Harbor Expansion Project: Wetland Interagency Coordination Team (UNCLASSIFIED)
Attachments: Appendix N Agency Coord.pdf

Classification: UNCLASSIFIED
 Caveats: NONE

At Wednesday's meeting, you asked about records from previous meetings.

Here is the section of the DEIS that contained the records of those meetings. It includes the meetings of the Wetland Interagency Coordination Team.

You asked about how the recommendations and decisions were made, the Corps called and hosted the meetings, prepared the records, sent them to the participants who attended, and revised them to address the suggested revisions. We then sent the revised documents out as the final Memorandum For Record of the meeting.

For the various Interagency Coordination Teams, the Corps asked each agency to designate a representative who would speak for them and represent them on the team. We invited all the designated members to the meetings. Not everyone was able to attend every meeting. With retirements and staff turnover, the membership changed over time. It appears that information was not passed along well within each agency. (Our record-keeping here is certainly not the best.) That worked against us as we encountered problems and the study duration extended.

BB

Classification: UNCLASSIFIED
 Caveats: NONE

Bailey, William G SAS

From: Bailey, William G SAS
Sent: Tuesday, June 07, 2011 4:42 PM
To: 'beckhajt@dhec.sc.gov'; 'Heather Preston'; 'Blair N. Williams'; 'Barbara Neale'; 'Kelie Moore'; 'Dale Caldwell'; 'Keith_Parsons@mail.dnr.state.ga.us'; 'Elizabeth Booth'; 'Bob Lord (Lord.Bob@epa.gov)'; 'Mueller, Heinz J.'; 'Gagliano.Paul@epamail.epa.gov'; 'Godfrey.Annie@epamail.epa.gov'; 'Derby.Jennifer@epamail.epa.gov'; 'Melville.William@epamail.epa.gov'; 'joyce_stanley@ios.doi.gov'; 'Chuck_Hayes@fws.gov'; 'Bill Wikoff'; 'Jane_Griess@fws.gov'; 'wendtp@dnr.sc.gov'; 'Bob Perry'; 'kay.davy@noaa.gov'
Cc: 'Wade Cantrell'; 'hmoorer@gaports.com'; 'Jeff_Larson@dnr.state.ga.us'; 'Brad_Gane@dnr.state.ga.us'; 'Tim Barrett'; 'Okane, Jason D SAS'; 'Bradley, Kenneth P SAM'; 'McIntosh, Margaret (Mackie) SAS'; 'King, Jeffrey K. SAS'; 'Small, Daniel L SAD'; 'Lampley, Vechere V SAD'; 'Pace Wilber'; 'David Bernhart'; 'Jack_Arnold@fws.gov'; 'Mark_Musaus@fws.gov'; 'Sandy_Tucker@fws.gov'; 'Mancusi-Ungaro.Philip@epamail.epa.gov'; 'Gregory_Hogue@ios.doi.gov'; 'Rheta Geddings DiNovo'
Subject: Savannah Harbor Expansion Project: Draft MFR of 1 June Wetlands Interagency Coordination Team meeting (UNCLASSIFIED)
Attachments: 2011-06-07 Wetlands IGT Meeting MFR.DOCX

Classification: UNCLASSIFIED
 Caveats: NONE

I've attached our draft Memorandum For Record of last week's meeting.

Please send Mackie McIntosh any suggested revisions or corrections by COB 17 June.

Bill Bailey

-----Original Message-----

From: Bailey, William G SAS
Sent: Friday, June 03, 2011 3:07 PM
To: 'beckhajt@dhec.sc.gov'; 'Blair N. Williams'; 'Kelie Moore'; 'Dale Caldwell'; 'Keith_Parsons@mail.dnr.state.ga.us'; 'Bob Lord (Lord.Bob@epa.gov)'; 'Mueller, Heinz J.'; 'Bill Wikoff'; 'wendtp@dnr.sc.gov'; 'Bob Perry'; 'kay.davy@noaa.gov'
Cc: 'Wade Cantrell'; 'Chuck_Hayes@fws.gov'; 'hmoorer@gaports.com'; 'Jeff_Larson@dnr.state.ga.us'; 'Brad_Gane@dnr.state.ga.us'; 'Tim Barrett'; 'Okane, Jason D SAS'; 'Bradley, Kenneth P SAM'; 'McIntosh, Margaret (Mackie) SAS'; 'King, Jeffrey K. SAS'; 'Small, Daniel L SAD'; 'Lampley, Vechere V SAD'; 'Pace Wilber'; 'David Bernhart'; 'Jack_Arnold@fws.gov'; 'Mark_Musaus@fws.gov'; 'Sandy_Tucker@fws.gov'; 'Jane_Griess@fws.gov'; 'Gagliano.Paul@epamail.epa.gov'; 'Godfrey.Annie@epamail.epa.gov'; 'Derby.Jennifer@epamail.epa.gov'; 'Melville.William@epamail.epa.gov'; 'Mancusi-Ungaro.Philip@epamail.epa.gov'; 'Gregory_Hogue@ios.doi.gov'; 'joyce_stanley@ios.doi.gov'; 'Rheta Geddings DiNovo'; 'Barbara Neale'; 'Heather Preston'
Subject: Savannah Harbor Expansion Project: Wetlands Interagency Coordination Team meeting (UNCLASSIFIED)

Classification: UNCLASSIFIED
 Caveats: NONE

I've attached the presentation we gave at this Wednesday's meeting and the sign-in sheet.

Thank you all for attending.

We are adding some of the figures that had in the presentation to our write-up for the FEIS. We expect to complete that and send it out to you by the end of next week.

Bill Bailey
Chief, Planning Division

Classification: UNCLASSIFIED
Caveats: NONE

Classification: UNCLASSIFIED
Caveats: NONE

CESAS-PD

7 June 2011

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project (SHEP) Wetlands Interagency Coordination Team (ICT) Meeting Summary

1. In response to a request from the Environmental Protection Agency (EPA) in their comments on the SHEP Draft Environmental Impact Statement (EIS), the US Army Corps of Engineers, Savannah District (USACE) called a meeting of the SHEP Wetlands Interagency Coordination Team. The meeting was held on 1 June 2011 in Atlanta, Georgia at the EPA Region 4 office and attended by representatives from the following agencies: USACE; EPA; US Fish and Wildlife Service (USFWS); US Department of the Interior; Georgia Department of Natural Resources, Environmental Protection Division (GA DNR-EPD); Georgia Department of Natural Resources, Coastal Resources Division (GA DNR-CRD); South Carolina Department of Health and Environmental Control (SC DHEC); and SC DHEC Office of Coastal Resource Management (SC DHEC-OCRM).
2. The meeting began with Mr. William Bailey (USACE) and Mr. Heinz Mueller (EPA) welcoming the group, introductions of meeting attendees, and a brief overview of the meeting objectives. Mr. Bailey then presented an overview of the project history and summaries of past meetings of the Wetlands ICT. The review included the 2003 determination that tidal freshwater vegetative communities are the most critical wetland community in the Savannah River estuarine ecosystem. He reviewed the development of the salinity criteria that the Corps used to predict and evaluate impacts from harbor deepening and summarized attempts to develop and use Marsh Succession Models to predict marsh impacts, rather than using in-river salinity predictions. Mr. Bailey concluded his presentation with a summary of the most recent Wetlands ICT meeting in August 2009, a site visit to a proposed restoration site at Disposal Area 1S.
3. Dr. Jeff King continued the presentation with technical information on the project's wetland analyses and both the direct and indirect impacts to wetlands that are expected to occur as a result of harbor deepening. Dr. King indicated that the Final EIS would include a more rigorous discussion of the functional assessment analysis the Corps conducted to address EPA's concerns regarding consistency with the 2008 EPA/US Army Corps of Engineers Mitigation Rule. He began his presentation with a discussion of the direct impacts, where wetlands would be lost through excavation during harbor deepening. He showed pictures of vegetation at the various impact sites. He also presented the mitigation plan proposed for those impacts – grading down most of Disposal Area 1S to allow the site to restore to brackish marsh.
4. Dr. King then presented technical information on the project's indirect impacts to wetlands. This included information from wetland studies within the harbor and scientific journal articles that discussed the relationship between observed salinities and vegetative species occurrence, diversity, and function. He compared the nomenclature used in scientific literature to distinguish between the vegetative communities with that previously recommended by the Wetlands ICT and used by the Corps for the SHEP analyses. Based on the expected project change in marsh

CESAS-PD

SUBJECT: Savannah Harbor Expansion Project (SHEP) Wetlands Interagency Coordination Team (ICT) Meeting

salinities of ± 2 parts per thousand, Dr. King summarized that the vegetative conversion would not be a major one and would have a negligible or minor adverse effect on overall wetland function. He identified fish and wildlife habitat as the single wetland function that could change as a result of the expected changes in salinity.

5. After summarizing the expected indirect impacts to wetlands, Dr. King then presented the mitigation plan presented in the Draft EIS to compensate for the expected impacts. He included the District's watershed assessment to identify appropriate mitigation options and all its associated considerations. He showed maps identifying the potential sites for habitat preservation (the chosen mitigation alternative) and the Standard Operating Procedure (SOP) Worksheets that were used as a tool to help assess the preservation acreage requirements for the proposed action. He concluded the presentation with a brief overview of the proposed monitoring network, the adaptive management process that could be implemented should the vegetative conversion exceed that which is expected, and a summary of all the information presented.

6. The group discussion focused on the application of the SOP worksheets to the harbor deepening and the values of certain parameters used in the calculations. The group did not agree that the values applied were consistent, namely the Dominant Effect, Control, and Threat. The group discussed the impacts of the expected vegetative conversion and if there were better tools that could be used to quantify the level of acceptable mitigation for that expected wetland conversion. No other tools or methods were suggested. Mr. Bailey stated that members of the Wetlands ICT had previously recommended using the Savannah SOP as a quantification tool. The worksheets were included in the Draft EIS and the Draft Fish and Wildlife Coordination Act Report (FWCAR). Mr. Bailey also noted that the resource agencies had not expressed concern with the SOP values in their official comments on the Draft EIS or the FWCAR. A portion of the discussion focused on the historical landscape and its value in determining the appropriate mitigation strategy. SC DHEC stated that saltmarsh is ecologically valuable and losses of that community need to be mitigated. The USFWS indicated that while saltmarsh is a valuable vegetative community, the Savannah National Wildlife Refuge (SNWR) was historically tidal freshwater marsh, a unique habitat that had been adversely impacted by higher salinity levels and replaced over time, and is therefore a priority in this estuary because of the historic adverse cumulative impacts. USFWS also indicated that the parcels proposed by the Corps for habitat preservation are not necessarily their present top priority for parcels to add to the SNWR. Ms. Jane Griess (USFWS) indicated that the SNWR prioritizes acquisition of the "Exley" and "Del-a-Rae" parcels over the proposed "Mill Creek" parcel. The Corps said it was open to substituting parcels that provided similar of better habitats than those identified in the Draft EIS.

7. The group discussed the desire of some agencies to re-designate their official member of the Wetlands ICT, as a number of the original members have retired or are no longer involved with the project. The group agreed that the Wetlands ICT should be actively involved with the monitoring (particularly the post-construction monitoring), to identify the need for adaptive

CESAS-PD

SUBJECT: Savannah Harbor Expansion Project (SHEP) Wetlands Interagency Coordination Team (ICT) Meeting

management, and enact any agreed measures in a timely fashion. The group also discussed the proposed length of the post-construction monitoring period. Mr. Bailey acknowledged that the natural resource agencies had requested a longer monitoring period and that USACE was internally discussing extending the period beyond the five years stated in the Draft EIS.

8. At the conclusion of the meeting, Mr. Mueller thanked the USACE personnel for presenting the information. Mr. Bailey and Mr. Mueller thanked everyone for attending, and the meeting was adjourned.



MARGARETT G. MCINTOSH
Planning Division

Encl

NAME	ORGANIZATION	PHONE	EMAIL
Mackie McIntosh	USACE, Savannah Dist	912-652-5320	margaret.mcintosh@usace.army.mil
Jeddy King	USACE, Savannah Dist	678-422-1581	jeddy.k.king@usace.army.mil
William Bailey	"	912-652-5781	
Heinz Mueller	USEPA	404-562-9511	mueller.heinz@epa.gov
Jennifer Wette	GA EPD	404-562-0050 675-1752	jennifer.wette@dnr.state.ga.us
Bill Melville	US EPA	404-562-9266	MELVILLE, WILLIAM E EPA-DOV
Bob Lord	EPA	404-562-9408	lord.bob@epa.gov
Jennifer Derby	EPA	404-562-9401	derby.jennifer@epa.gov
Annie Godfrey	EPA	404-562-9967	godfrey.annie@epa.gov
Joyce Stanley	DOI(OEPC)	404-331-4524	joyce-stanley@ios.doi.gov
PAUL GAGLIANO	EPA	(404) 562-9373	gagliano.paul@epa.gov
Keith Parsons	GA EPD	404-675-1631	keith.parsons@dnr.state.ga.us
Dale Caldwell	GA EPD	912-261-3924	dale.caldwell@dnr.state.ga.us
Chuck Hayes	USFWS	843-784-8911	chuck.hayes@fws.gov
Jane Griess	USFWS	843-784-9911	Jane.Griess@fws.gov
Bill Wikoff	USFWS	912-832-8739	bill.wikoff@fws.gov
Liz Booth	GA EPD	404-675-1675	elizabeth.booth@dnr.state.ga.us
Kathleen Preston	SCDHEC	803-898-3105	kpreston@dhc.sc.gov
Barbara Neale	SCDHEC	843-953-0245	nealeb@dhc.sc.gov
Chris Beckham	SCDHEC	803-898-4261	beckhajc@dhc.sc.gov
Barbara N. Williams	SCDHEC	843-953-0232	williamsb@dhc.sc.gov

CESAS-PD

4 August 2011

MEMORANDUM FOR RECORD

SUBJECT: Savannah Harbor Expansion Project (SHEP) Wetlands Interagency Coordination Team (ICT) Meeting Summary

1. In response to a request from the Environmental Protection Agency (EPA) in their comments on the SHEP Draft Environmental Impact Statement (EIS), the US Army Corps of Engineers, Savannah District (USACE) called a meeting of the SHEP Wetlands Interagency Coordination Team. The meeting was held on 1 June 2011 in Atlanta, Georgia at the EPA Region 4 office and attended by representatives from the following agencies: USACE; EPA; US Fish and Wildlife Service (USFWS); US Department of the Interior; Georgia Department of Natural Resources, Environmental Protection Division (GA DNR-EPD); Georgia Department of Natural Resources, Coastal Resources Division (GA DNR-CRD); South Carolina Department of Health and Environmental Control (SC DHEC); and SC DHEC Office of Coastal Resource Management (SC DHEC-OCRM).
2. The meeting began with Mr. William Bailey (USACE) and Mr. Heinz Mueller (EPA) welcoming the group, introductions of meeting attendees, and a brief overview of the meeting objectives. Mr. Bailey then presented an overview of the project history and summaries of past meetings of the Wetlands ICT. The review included the 2003 determination that tidal freshwater vegetative communities are the most critical wetland community in the Savannah River estuarine ecosystem. He reviewed the development of the salinity criteria that the Corps used to predict and evaluate impacts from harbor deepening and summarized attempts to develop and use Marsh Succession Models to predict marsh impacts, rather than using in-river salinity predictions. Mr. Bailey concluded his presentation with a summary of the most recent Wetlands ICT meeting in August 2009, a site visit to a proposed restoration site at Disposal Area 1S.
3. Dr. Jeff King continued the presentation with technical information on the project's wetland analyses and both the direct and indirect impacts to wetlands that are expected to occur as a result of harbor deepening. Dr. King indicated that the Final EIS would include a more rigorous discussion of the functional assessment analysis the Corps conducted to address EPA's concerns regarding consistency with the 2008 EPA/US Army Corps of Engineers Mitigation Rule. He began his presentation with a discussion of the direct impacts, where wetlands would be lost through excavation during harbor deepening. He showed pictures of vegetation at the various impact sites. He also presented the mitigation plan proposed for those impacts – grading down most of Disposal Area 1S to allow the site to restore to brackish marsh.
4. Dr. King then presented technical information on the project's indirect impacts to wetlands. This included information from wetland studies within the harbor and scientific journal articles that discussed the relationship between observed salinities and vegetative species occurrence, diversity, and function. He compared the nomenclature used in scientific literature to distinguish between the vegetative communities with that previously recommended by the Wetlands ICT and used by the Corps for the SHEP analyses. Based on the expected project change in marsh

CESAS-PD

SUBJECT: Savannah Harbor Expansion Project (SHEP) Wetlands Interagency Coordination Team (ICT) Meeting

salinities of +/- 2 parts per thousand, Dr. King summarized that the vegetative conversion would not be a major one and would have a negligible or minor adverse effect on overall wetland function. He identified fish and wildlife habitat as the single wetland function that could change as a result of the expected changes in salinity.

5. After summarizing the expected indirect impacts to wetlands, Dr. King then presented the mitigation plan presented in the Draft EIS to compensate for the expected impacts. He included the District's watershed assessment to identify appropriate mitigation options and all its associated considerations. He showed maps identifying the potential sites for habitat preservation (the chosen mitigation alternative) and the Standard Operating Procedure (SOP) Worksheets that were used as a tool to help assess the preservation acreage requirements for the proposed action. He concluded the presentation with a brief overview of the proposed monitoring network, the adaptive management process that could be implemented should the vegetative conversion exceed that which is expected, and a summary of all the information presented.

6. The group discussion focused on the application of the SOP worksheets to the harbor deepening and the values of certain parameters used in the calculations. The group did not agree that the values applied were consistent, namely the Dominant Effect, Control, and Threat. A dominant effect level of 0 was used in the SOP calculation sheets to determine the required credits for the salinity change in the saltmarsh. It was discussed that this is not consistent with using the highest net improvement value of 1.4 to calculate the restoration credits. The group also discussed whether or not it is appropriate to apply a high threat level value of 0.3 to the preservation areas. In addition, there was also disagreement concerning the highest control value of 0.5 for the restoration areas, and whether or not the lack of a preservation mechanism is consistent with the new mitigation rule. The group also discussed the impacts of the expected vegetative conversion and if there were better tools that could be used to quantify the level of acceptable mitigation for that expected wetland conversion. No other tools or methods were suggested. Mr. Bailey stated that members of the Wetlands ICT had previously recommended using the Savannah SOP as a quantification tool. The worksheets were included in the Draft EIS and the Draft Fish and Wildlife Coordination Act Report (FWCAR). A portion of the discussion focused on the historical landscape and its value in determining the appropriate mitigation strategy. SC DHEC stated that saltmarsh is ecologically valuable and losses of that community need to be mitigated. The USFWS indicated that while saltmarsh is a valuable vegetative community, the Savannah National Wildlife Refuge (SNWR) was historically tidal freshwater marsh, a unique habitat that had been adversely impacted by higher salinity levels and replaced over time, and is therefore a priority in this estuary because of the historic adverse cumulative impacts. USFWS also indicated that the parcels proposed by the Corps for habitat preservation are not necessarily their present top priority for parcels to add to the SNWR. Ms. Jane Griess (USFWS) indicated that the SNWR prioritizes acquisition of the "Exley" and "Del-a-Rae" parcels over the proposed "Mill Creek" parcel. The Corps said it was open to substituting parcels that provided similar of better habitats than those identified in the Draft EIS.

CESAS-PD

SUBJECT: Savannah Harbor Expansion Project (SHEP) Wetlands Interagency Coordination Team (ICT) Meeting

7. The group discussed the desire of some agencies to re-designate their official member of the Wetlands ICT, as a number of the original members have retired or are no longer involved with the project. The group agreed that the Wetlands ICT should be actively involved with the monitoring (particularly the post-construction monitoring), to identify the need for adaptive management, and enact any agreed measures in a timely fashion. The group also discussed the proposed length of the post-construction monitoring period. Mr. Bailey acknowledged that the natural resource agencies had requested a longer monitoring period and that USACE was internally discussing extending the period beyond the five years stated in the Draft EIS.

8. At the conclusion of the meeting, Mr. Mueller thanked the USACE personnel for presenting the information. Mr. Bailey and Mr. Mueller thanked everyone for attending, and the meeting was adjourned.



MARGARETT G. McINTOSH
Planning Division

Encl

NAME	ORGANIZATION	PHONE	EMAIL
Mackie McIntosh	USACE, Savannah Dist	912-652-5520	margaret.mcintosh@usace.army.mil
Jeddy King	USACE, Savannah Dist	678-422-1581	jeddy.k.king@usace.army.mil
William Bailey	"	912-652-5781	
Heinz Mueller	USEPA	404-562-9511	mueller.heinz@epa.gov
Jennifer Wette	GA EPD	404-562-1750	jennifer.wette@dnr.state.ga.us
Bill Melville	USEPA	404-562-9266	MELVILLE.WILLIAM@epa.gov
Bob Lord	EPA	404-562-9408	lord.bob@epa.gov
Jennifer Derby	EPA	404-562-9401	derby.jennifer@epa.gov
Annie Godfrey	EPA	404-562-9967	godfrey.annie@epa.gov
Joyce Stanley	DOI(OEPC)	404-331-4524	joyce.stanley@ios.doi.gov
PAUL GAGLIANO	EPA	(404) 562-9373	gagliano.paul@epa.gov
Keith Parsons	GA EPD	404-675-1631	keith.parsons@dnr.state.ga.us
Dale Caldwell	GA EPD	912-261-3924	dale.caldwell@dnr.state.ga.us
Chuck Hayes	- USFWS	843-784-8911	chuck.hayes@fws.gov
Jane Griess	- USFWS	843-784-9944	Jane.Griess@fws.gov
Bill Wikoff	USFWS	912-832-3739	bill.wikoff@fws.gov
Liz Booth	GA EPD	404-675-1673	elizabeth.booth@dnr.state.ga.us
Kathleen Preston	SCDHEC	803-898-3105	presthsk@dhec.sc.gov
Barbara Neale	SCDHEC	843-953-0245	nealeb@dhec.sc.gov
Chris Beckham	SCDHEC	803-898-4261	beckhajc@dhec.sc.gov
DAVE N. Williams	SCDHEC	843-953-0232	williamd@dhec.sc.gov

Bailey, William G SAS

From: Bailey, William G SAS
Sent: Wednesday, June 08, 2011 4:00 PM
To: 'beckhajc@dhec.sc.gov'; 'Heather Preston'; 'Blair N. Williams'; 'Barbara Neale'; 'Kelle Moore'; 'Dale Caldwell'; 'Keith_Parsons@mail.dnr.state.ga.us'; 'Elizabeth Booth'; 'Bob Lord (Lord.Bob@epa.gov)'; 'Mueller, Heinz J.'; 'Gagliano.Paul@epamail.epa.gov'; 'Godfrey.Annie@epamail.epa.gov'; 'Derby.Jennifer@epamail.epa.gov'; 'Melville.William@epamail.epa.gov'; 'joyce_stanley@ios.doi.gov'; 'Chuck_Hayes@fws.gov'; 'Bill Wikoff'; 'Jane_Griess@fws.gov'; 'wendtp@dnr.sc.gov'; 'Bob Perry'; 'kay.davy@noaa.gov'; 'Wade Cantrell'; 'hmoorer@gaports.com'; 'Jeff_Larson@dnr.state.ga.us'; 'Brad_Gane@dnr.state.ga.us'; 'Tim Barrett'; 'Jennifer Welle'; 'Okane, Jason D SAS; Bradley, Kenneth P SAM; McIntosh, Margaret (Mackie) SAS; King, Jeffrey K. SAS; Small, Daniel L SAD; Lampley, Vechere V. SAD; 'Pace Wilber'; 'David Bernhart'; 'Jack_Arnold@fws.gov'; 'Mark_Musaus@fws.gov'; 'Sandy_Tucker@fws.gov'; 'Mancusi-Ungaro.Philip@epamail.epa.gov'; 'Gregory_Hogue@ios.doi.gov'; 'Rheta Geddings DiNovo'
Cc: Savannah Harbor Expansion Project; 1 June Wetlands Interagency Coordination Team meeting (UNCLASSIFIED)
Subject: VII Consideration of Final Mitigation Rule.docx
Attachments:

Classification: UNCLASSIFIED
Caveats: NONE

We added some of the figures we used in the presentation to the write-up that we are developing for the FEIS.

This write-up is still subject to revision, but it is our most recent version of how the mitigation plan complies with the Mitigation Rule.

Bill Bailey

-----Original Message-----

From: Bailey, William G SAS
Sent: Tuesday, June 07, 2011 4:42 PM
To: 'beckhajc@dhec.sc.gov'; 'Heather Preston'; 'Blair N. Williams'; 'Barbara Neale'; 'Kelle Moore'; 'Dale Caldwell'; 'Keith_Parsons@mail.dnr.state.ga.us'; 'Elizabeth Booth'; 'Bob Lord (Lord.Bob@epa.gov)'; 'Mueller, Heinz J.'; 'Gagliano.Paul@epamail.epa.gov'; 'Godfrey.Annie@epamail.epa.gov'; 'Derby.Jennifer@epamail.epa.gov'; 'Melville.William@epamail.epa.gov'; 'joyce_stanley@ios.doi.gov'; 'Chuck_Hayes@fws.gov'; 'Bill Wikoff'; 'Jane_Griess@fws.gov'; 'wendtp@dnr.sc.gov'; 'Bob Perry'; 'kay.davy@noaa.gov'; 'Wade Cantrell'; 'hmoorer@gaports.com'; 'Jeff_Larson@dnr.state.ga.us'; 'Brad_Gane@dnr.state.ga.us'; 'Tim Barrett'; 'Okane, Jason D SAS; Bradley, Kenneth P SAM; McIntosh, Margaret (Mackie) SAS; King, Jeffrey K. SAS; Small, Daniel L SAD; Lampley, Vechere V. SAD; 'Pace Wilber'; 'David Bernhart'; 'Jack_Arnold@fws.gov'; 'Mark_Musaus@fws.gov'; 'Sandy_Tucker@fws.gov'; 'Mancusi-Ungaro.Philip@epamail.epa.gov'; 'Gregory_Hogue@ios.doi.gov'; 'Rheta Geddings DiNovo'
Subject: Savannah Harbor Expansion Project: Draft MFR of 1 June Wetlands Interagency Coordination Team meeting (UNCLASSIFIED)

I've attached our draft Memorandum For Record of last week's meeting.

Please send Mackie McIntosh any suggested revisions or corrections by COB 17 June.

Bill Bailey

-----Original Message-----

From: Bailey, William G SAS

Sent: Friday, June 03, 2011 3:07 PM

To: 'beckhajc@dhc.sc.gov'; 'Blair N. Williams'; 'Kelie Moore'; 'Dale Caldwell';

'Keith_Parsons@mail.dnr.state.ga.us'; 'Bob Lord (Lord.Bob@epa.gov)'; 'Mueller, Heinz J.';

'Bill Wikoff'; 'wendtp@dnr.sc.gov'; 'Bob Perry'; 'kay.davy@noaa.gov'

Cc: 'Wade Cantrell'; 'Chuck_Hayes@fws.gov'; 'hmoorer@gaports.com';

'Jeff_Larson@dnr.state.ga.us'; 'Brad_Gane@dnr.state.ga.us'; 'Tim Barrett'; Okane, Jason D

SAS; Bradley, Kenneth P SAM; McIntosh, Margaret (Mackie) SAS; King, Jeffrey K. SAS; Small,

Daniel L SAD; Lampley, Vechere V SAD; 'Pace Wilber'; 'David Bernhart'; 'Jack_Arnold@fws.gov';

'Mark_Musaus@fws.gov'; 'Sandy_Tucker@fws.gov'; 'Jane_Griess@fws.gov';

'Gagliano.Paul@epamail.epa.gov'; 'Godfrey.Annie@epamail.epa.gov';

'Derby.Jennifer@epamail.epa.gov'; 'Melville.William@epamail.epa.gov'; 'Mancusi-

Ungaro.Philip@epamail.epa.gov'; 'Gregory_Hogue@ios.doi.gov'; 'joyce_stanley@ios.doi.gov';

'Rheta Geddings DiNovo'; 'Barbara Neale'; 'Heather Preston'

Subject: Savannah Harbor Expansion Project: Wetlands Interagency Coordination Team meeting
(UNCLASSIFIED)

Classification: UNCLASSIFIED

Caveats: NONE

I've attached the presentation we gave at this Wednesday's meeting and the sign-in sheet.

Thank you all for attending.

We are adding some of the figures that had in the presentation to our write-up for the FEIS.
We expect to complete that and send it out to you by the end of next week.

Bill Bailey

Chief, Planning Division

Classification: UNCLASSIFIED

Caveats: NONE

BOARD:
Paul C. Anthony, III
Chairman
Edwin H. Cooper, III
Vice Chairman
Steven G. Kiser
Secretary



C. Earl Hunter, Commissioner
"Promoting and protecting the health of the public and the environment"

BOARD:
Henry C. Scott
M. David Mitchell, MD
Glen A. McCall
Coleman F. Buckhous, MD

June 16, 2011

William Bailey
US Army Corps of Engineers, Savannah District
100 West Oglethorpe Avenue
Savannah, Georgia 31401

Re: P/N 2010 SHEP; Savannah Harbor Expansion Project (SHEP); Water Quality Certification

Dear Mr. Bailey:

The South Carolina Department of Health and Environmental Control (Department) sent a letter on March 3, 2011, outlining our concerns about the above referenced project. This letter also requested additional information that must be received to complete the water quality certification process. Subsequent to this letter, the Department received your response dated April 1, 2011, and attended several meetings to discuss the proposed project. After reviewing the additional information obtained in your response letter and at the meetings, the Department continues to have concerns about the project.

As discussed in the meeting held on May 12, 2011, the Department is concerned about the ability of the Speece Cones to adequately oxygenate the shallow water areas of the Back River. The Department is also concerned that the models used by the Corps do not adequately simulate flows in the Back and Middle Rivers. The Department has been working with the Corps to determine what information will be needed to address these concerns. The Corps is currently working with a contractor to develop a report to evaluate the applicability of the oxygen injection system in the shallow water areas of the Back River. The Corps is also working with the contractor to acquire updated modeling data to compare the Corps' hydrodynamic and water quality model with the Environmental Protection Agency's (EPA) revised TMDL model. The Department will require that these reports be submitted with adequate time for review prior to any decision on the Water Quality Certification.

The wetland impacts from the project and the proposed mitigation continue to be a concern of the Department. The project will substantially alter the wetlands located in the lower Savannah River estuary. Section F(5)(a) of Regulation 61-101, Water Quality Certification, states that certification will be denied if the proposed activity alters the ecosystem in the vicinity of the project such that its functions and values are eliminated or impaired. In order to comply with the provisions in Section F of Regulation 61-101, the Department must require appropriate mitigation to ensure that functions and values in the ecosystem will be protected. Early in the development phase of this project, an Interagency Coordination Team (ICT) was established to assist in evaluating the wetland impacts and mitigation. The results of this interagency coordination lead to the mitigation proposal included in the permit application. The plan places an emphasis on minimizing the loss of freshwater tidally influenced wetlands, because these wetlands have historically been altered by past projects.

A meeting to discuss the wetland impacts and mitigation was held on June 1, 2011, in Atlanta Georgia. The exhibits presented during the meeting show significant areas of salt marsh impacts in South Carolina waters. The Corps used the Savannah District Standard Operating Procedures (SOP) as a tool to quantify the impacts and determine appropriate compensation for the salinity conversion. The reduction

in salinity will cause a vegetative shift by converting the dominant salt marsh plant species to a vegetative community dominated by more brackish species. While the Department has no objection to using the SOP to quantify the impacts from the change in salinity, the Department is concerned about the way some of the factors in the SOP were applied.

During the June 1st meeting, the Corps presented a substantial amount of scientific research to show that the reduced salinity in the salt marsh areas would have a minor effect on the vegetative community in the ecosystem. Since this change will be minimal, a dominant effect level of 0 was used in the SOP calculation sheets to determine the required credits for the salinity change in the salt marsh. Then the Corps used the highest level (1.4) for the net improvement factor to determine that 4,485.6 credits will be generated by the restoration of 1,068 acres of brackish marsh. The high net improvement value is not consistent with the low dominant effect level. Furthermore, the area proposed for restoration is comprised of the same wetlands where the impacts will occur. The Corps agrees that the vegetative shift from the salinity conversion is an impact and is proposing to take restoration credit for these impacts. The Department is concerned about the precedent set by allowing the Corps to take restoration credit for wetlands that are included in the project impacts.

Another concern about the restoration component of the mitigation plan is the level of control for 1,068 acres of brackish marsh. The Corps has acknowledged that the restoration area will be preserved as wetlands included as part of the public trust. This level of control is not appropriate because many of the wetlands impacted by this project currently exist as part of the public trust. There is no mechanism to preclude impacts to these wetlands from any future harbor deepening. In order to generate mitigation credits, the restored wetlands must be preserved with a mechanism to ensure that these wetlands will be protected in perpetuity.

The approach to mitigation used by the Corps does not offset all of the project impacts since no mitigation is provided for the impacts to 730 acres of salt marsh for the 48' deepening. This plan diminishes the ecological value of salt marsh, while placing an arbitrarily elevated value to the creation of brackish marsh. Even though the vegetative shift that will occur from the change in salinity is minimal, there will be some loss to the habitat functions within the large area of converted salt marsh. This plan may have been acceptable when discussed in the early meetings of the ICT, but it is not consistent with the state's regulatory obligation to protect existing uses in the ecosystem. The plan does not meet the requirements of Regulation 61-101, since no reasonable assurance is given that the project will not eliminate or impair functions within the ecosystem.

Another regulatory obligation of the Department is to receive and acknowledge comments in response to a public notice for a water quality certification. Several comment letters were received during the public comment period. The Department received letters from resource agencies, such as the South Carolina Department of Natural Resources, and from non-governmental organizations including the Southern Environmental Law Center. These letters identified a variety of concerns about the project. The Department is requesting a response to these comment letters. The letters were addressed to the Corps and you should have received copies. If not, please let the Department know and we will forward you a copy each letter.

In our March 3rd letter the Department discussed our concern about the project's potential impacts to endangered and threatened species. Since that time, we received a copy of a letter dated April 28, 2011, from the United States Fish and Wildlife Service (USFWS). This letter gave concurrence on the Biological Assessment of Threatened and Endangered Species (BATES) included as Appendix B in the draft EIS. Some of the endangered species that might be affected by this project fall under the responsibility of the National Marine Fisheries Service (NMFS). It is our understanding that the Corps is

currently in consultation with NMFS. Regulation 61-101 states in Section 5(c) that certification will be denied if the project adversely impacts waters containing State or Federally recognized rare, threatened, or endangered species. To assure that the project complies with the Section 5(c) of the regulation, the Department will need to get concurrence from NMFS prior to making a certification decision.

As stated previously, the Department has several remaining concerns that need to be addressed before we can render a decision on the 401 Water Quality Certification. We appreciate the Corps' continued effort to resolve these concerns and we will continue to work with you through the certification process. Pursuant to Regulation 61-30, and Regulation 61-101, the Department has 180 days to complete action on an application for 401 Water Quality Certification. These 180 days include only those days in which the Department is actively reviewing the application; the clock stops when information is requested and the Department is waiting on a response. Since the Department has agreed to waive the fee for this project, the 180-day clock pursuant to Regulation 61-30 is not applicable. The 180-day clock pursuant to Regulation 61-101 will not start until all of the subsequent information is received. It should be noted that the Department must issue, waive, or deny a decision on a federal permit within one of acceptance of a complete application, so we would appreciate a timely response to this information request. Should you have any questions, you may call me at (803) 898-4261 or you may e-mail beckhaje@dhec.sc.gov.

Sincerely,



Chris Beckham, Project Manager
Water Quality Certification & Wetlands Section

Cc: Blair Williams, OCRM

Bailey, William G SAS

From: Bailey, William G SAS
Sent: Wednesday, July 13, 2011 11:23 AM
To: 'Beckham, J. Christopher'
Subject: RE: Savannah Harbor Expansion Project: draft responses to comments 3 of 3 (UNCLASSIFIED)
Attachments: 2011-07-13 SELC Comments for DHEC.PDF

Classification: UNCLASSIFIED
 Caveats: NONE

From: Bailey, William G SAS
Sent: Wednesday, July 13, 2011 11:21 AM
To: 'Beckham, J. Christopher'
Subject: RE: Savannah Harbor Expansion Project: draft responses to comments 2 of 3 (UNCLASSIFIED)

Classification: UNCLASSIFIED
 Caveats: NONE

From: Bailey, William G SAS
Sent: Wednesday, July 13, 2011 11:20 AM
To: 'Beckham, J. Christopher'
Subject: Savannah Harbor Expansion Project: draft responses to comments 1 of 3 (UNCLASSIFIED)

Classification: UNCLASSIFIED
 Caveats: NONE

We've completed our draft responses to these letters. I'll send each in separate emails because of their size.

We are still coordinating these responses within our agency, so please treat them as being pre-decisional and not public information at this time.

Bill Bailey

From: Beckham, J. Christopher [<mailto:beckhajc@dhec.sc.gov>]
Sent: Wednesday, June 29, 2011 1:40 PM
To: Bailey, William G SAS
Subject: Re: Savannah Harbor Expansion Project: SCDHEC 16 June letter on water quality certification (UNCLASSIFIED)

Bill,

The comment letters for which we would like a response are:

The Southern Environmental Law Center, January 25, 2011

SC Dept. of Natural Resources, January 25, 2011

US EPA, January 28, 2011

Those three are the only comment letters that I received. If you need anything else, let me know.

Chris

On Mon, Jun 27, 2011 at 7:40 AM, Beckham, J. Christopher <beckhaje@dhec.sc.gov> wrote:
Bill,

That won't be a problem. I will be out of the office all day today, but I will send you a list when I come in tomorrow.

Chris

On Fri, Jun 24, 2011 at 10:46 AM, Bailey, William G SAS <William.G.Bailey@usace.army.mil> wrote:

Classification: UNCLASSIFIED

Caveats: NONE

We received your recent letter (attached). In it, you mention wanting our responses for letters that you received during the public comment period concerning water quality.

To be certain we provide the information you are looking for, could you send me a list with the commentor name and date of the letter for which you would like our response?

Thank you.

BB

From: Moore, Monica R SAS
Sent: Friday, June 24, 2011 9:22 AM
To: Bailey, William G SAS
Subject: SHEP SCDHEC 16 June Letter on water quality cert

Classification: UNCLASSIFIED

Caveats: NONE

<<Letter PN 2010 SHEP Water Quality cert>>

Classification: UNCLASSIFIED

Caveats: NONE

Classification: UNCLASSIFIED

Caveats: NONE

—
Chris Beckham, Project Manager
SC Department of Health and Environmental Control
Water Quality Certification and Wetlands Section
(803) 898-4261

—
Chris Beckham, Project Manager
SC Department of Health and Environmental Control
Water Quality Certification and Wetlands Section
(803) 898-4261

Classification: UNCLASSIFIED
Caveats: NONE

Classification: UNCLASSIFIED
Caveats: NONE

Classification: UNCLASSIFIED
Caveats: NONE

Bailey, William G SAS

From: Bailey, William G SAS
nt: Wednesday, July 27, 2011 1:56 PM
nt: 'Beckham, J. Christopher'
Cc: 'Wade Cantrell'; Okane, Jason D SAS; McIntosh, Margaret (Mackie) SAS; Hoke, Joseph T SAS
Subject: Savannah Harbor Expansion Project -- Re-evaluation of Back River D.O. system (UNCLASSIFIED)
Attachments: FINAL Report - Back River Oxygen Injection July 26, 2011.pdf

Classification: UNCLASSIFIED
Caveats: NONE

You had requested we re-evaluate the effectiveness of the oxygen injection system that the Corps proposes for Back River. We consulted with Wade to better understand the Department's concerns prior to initiating the work.

Our contractor has completed the work and we provide the attached report for your review. We believe it fully addresses your concerns about this issue.

Bill Bailey

Classification: UNCLASSIFIED
Caveats: NONE

Analysis of Oxygen Injection in the Back River in Support of the Savannah Harbor Expansion Project



PREPARED BY:



Tetra Tech, Inc.
2110 Powers Ferry Rd. SE, Suite 202
Atlanta, Georgia 30339
Phone: (770) 850-0949
www.tetrattech.com



ECO₂

Eco Oxygen Technologies, LLC
3939 Priority Way South Drive, Suite 400
Indianapolis, IN 46240
Phone: (317) 706-6484
www.eco2tech.com

PREPARED FOR:



**US Army Corps
of Engineers**

USACE Savannah District
100 West Oglethorpe Ave
Savannah, Georgia 31401
Contract No: W912HN-09-R-0081
Work Order DQ02 (SEPI Contract)

July 26, 2011

Acknowledgements

Mr. Joe Hoke contributed to this report and coordinated efforts with the contractor team and the Savannah District. The District surveying team collected the bathymetric data through a hydrographic survey in June 2011. Mr. Wade Cantrell from the South Carolina Department of Health and Environmental Control (DHEC) assisted in the scope of this work. Mr. David Clidence and Dr. Richard Speece from ECO2 developed the first parts of this report by describing the physical nature of the oxygen injection system. Mr. Steven Davie was the project manager from Tetra Tech and was supported by Dr. Hugo Rodriguez, Dr. Yuri Plis, Mr. Jim Greenfield, and Mr. Christian Maiocco from Tetra Tech. Mr. Phillip Todd was the project manager for SEPI.

Table of Contents

1. Background	2
2. Physical Factors Controlling Oxygen Dynamics	2
2.1 Approach.....	2
2.2 O ₂ Transfer.....	3
2.3 Speece Cone Design	4
2.3.1 Oxygen Transfer in a Speece Cone.....	4
2.3.2 Conditions Required for Precluding Effervescence to Achieve Retention of High D.O. (>400 mg/L) Conditions in the Discharge.....	9
2.3.3 Discharge Diffuser Design Criteria	10
2.4 Superoxygenation Discharge into "Shallow" Waters.....	13
2.5 Example Speece Cone Installations.....	14
2.5.1 Gowanus Canal.....	14
2.5.2 Paper Mill Wastewater Oxygenation	15
2.5.3 Logan Martin Dam	16
2.5.4 Tombigbee River	17
2.5.5 Laboratory Studies to Define Effervescent Loss of Highly Superoxygenated Water	17
2.6 Tidal Mixing and Slack Tide	25
2.7 Recommendations	26
3. Bathymetry of Back River.....	27
4. Diffuser Design Calculations	29
5. Mixing Zone Model	31
5.1 MACTEC Summary	31
5.2 Mixing Zone Results	31
6. Summary and Conclusions	33
7. References	33

Appendix A – Diffuser Options

1. Background

This report will answer specific questions from the South Carolina Department of Health and Environmental Control (DHEC) about the oxygen injection systems in the Savannah Harbor, specifically the shallower Back River. The USACE Savannah District met with South Carolina DHEC on 12 May 2011 to discuss the Savannah Harbor Expansion Project and South Carolina DHEC expressed concerns about how well the proposed Dissolved Oxygen (D.O.) systems would function in the shallower Back River. Tetra Tech developed the design of the systems that would inject oxygen at three locations (near International Paper on the Front and Back Rivers and Georgia Pacific on the Savannah River) and had conducted mixing zone modeling (Tetra Tech 2010). South Carolina DHEC requested additional information that would provide greater assurance that the Speece cones would perform as designed at the Back River location. There was a previous study that suggested Speece cones are primarily a deep water technology not suitable for shallow waters (Final Aeration Technology Feasibility Report for the San Joaquin River Deep Water Ship Channel, Jones and Stokes, October 2004) and that sufficient water depth at the injection point is a critical design consideration.

2. Physical Factors Controlling Oxygen Dynamics

South Carolina DHEC requested an explanation of the physical factors controlling oxygen injection dynamics on the shallow Back River, including DO concentration as a function of the depth at which effervescence would occur. This section was prepared by ECO2 and describes the physics of oxygen injection as it relates to water depth (injection depth). This section will also address differences between the proposed design and the San Joaquin River case where water depth was identified as a factor in eliminating this general design.

The efficacy of using the Speece cone oxygenation system to supplement 20,000 lbs D.O. per day to the deep navigation channel was successfully demonstrated in August 2008. Modeling studies have shown the need to supplement D.O. to the Back River region, which is shallower than the navigation channel. A report written by Jones for supplementation of D.O. to the San Joaquin shipping channel (San Joaquin Oxygen Aeration Study, 2004) included a statement that the Speece cone system was not suitable for "shallow" bodies of water. Therefore, it was requested that ECO2 justify the efficacy of using the Speece cone for supplementing the D.O. in the Back River section of Savannah Harbor. In addition, it was requested that the physics of O_2 transfer in the Speece cone be more completely explained.

2.1 Approach

The final design of the Speece cone oxygenation system for supplementing D.O. into the Savannah River has been optimized incorporating discharge location characteristics and observations made during the 2008 demonstration. It is important to note that although the Speece cone system is similar to what was used in the demonstration, the operating parameters will be materially different.

In the Speece cone design, there is a balance between ambient D.O. saturation level of the surface water being treated and the D.O. level in the Speece cone discharge. While the ambient D.O. saturation

level is a function of site characteristic, the Speece cone discharge saturation level can be manipulated to generate D.O. levels higher than saturation, if desired. This was seen in 2008 demonstration when the Speece cone D.O. discharge was 150 mg/L (i.e. 208% saturation at the discharge depth of 34 feet) on the Front River.

When the Speece cone is operated near the ambient D.O. saturation level, there is no potential for D.O. to come out of solution by effervescence. The higher the differential in cone discharge D.O. level to the ambient saturation D.O. level, the higher the potential for effervescence. It is under these operating conditions, that the diffuser design is critical to ensure quick depressurization/dilution/mixing of the highly oxygenated water to prevent the potential for effervescence. This report will show that it takes at a minimum 170% saturation before effervescence is possible.

ECO2 has proposed implementation of a Speece cone to add 4,000 lbs D.O./day to the Back River which has a cross section of about 2,000 ft by 30 ft (MLLW) depth at the deepest point. To accomplish this, a side stream flow of 10,200 gpm would be pumped through a Speece cone and the D.O. raised to 40 mg/L in the discharge and sent to a diffuser located just above the bottom of this cross section. Surface D.O. saturation level of the Back river is 36 mg/L. Therefore, 40 mg/L in the discharge of the cone represents 111% saturation (40/36) at the river surface. If this 40 mg/L D.O. water was discharged from a diffuser located 15 feet below the surface it would be at only 77% of saturation. This is much below the 170% to 240% saturation effervescence potential documented in this report. (Effervescence potential is defined as the % saturation level below which no effervescence can occur.) The Back River system would have to have a D.O. of 122 to 173 mg/L to reach the 170% to 240% saturation threshold for potential effervescence. This does not take into consideration the fact that it would be diluted to about 1/10 of this concentration in a fraction of a second in a properly designed diffuser/depressurization system. The ECO2 design of 40 mg/L D.O. discharged at 15 feet below the surface is only at 77% saturation and incapable of manifesting effervescent loss of D.O. mass from the receiving water. Even though the ECO2 design precludes any effervescence of D.O., one of the charges of this project is to clarify the physics of O_2 transfer in a Speece cone and to quantify the conditions required for effervescent loss of D.O. from highly superoxygenated water. The remainder of this report summarizes the experimental results that document the effervescence phenomena in water that contains a range of D.O. concentrations from 50 to >400 mg/L produced using pressurized pure O_2 .

2.2 O_2 Transfer

O_2 is considered to be a relatively insoluble gas in water. The saturation concentration of O_2 in fresh water in contact with air (21% O_2) at 20°C and sea level is approximately 9 mg/L. The D. O. saturation concentration for pure O_2 is approximately 43 mg/L under these conditions. Physical factors which affect the saturation concentration of O_2 in water are as follows:

- Salinity
- Altitude
- Temperature

As the salinity increases, the solubility of O_2 decreases. As the altitude increases, the partial pressure of O_2 in air decreases and the saturation concentration decreases. As the temperature increases, the solubility of O_2 decreases. For instance, at 28°C and 5,000 mg/L salinity, the saturation concentration of water in contact with pure O_2 is 36 mg/L D.O.

Gas transfer equation:

$$dC = K_L A/V (C_{SAT} - C_{ACT})dT$$

where: dC is the change in D.O.

K_L is related to the turbulence at the gas-water interface

A is the gas interfacial area

V is the volume of water

C_{SAT} is the D.O. saturation concentration

C_{ACT} is the actual D.O. in the water

dT is the time over which the gas transfer occurs

All O_2 transfer systems work according to this equation.

2.3 *Speece Cone Design*

There are two critical design components when designing a Speece cone oxygenation system. The first is the design of the Speece cone itself, and the second is the design of the diffuser. Each is critical and will be discussed in detail.

2.3.1 Oxygen Transfer in a Speece Cone

The Speece cone is designed to achieve high O_2 absorption efficiency. Low O_2 absorption efficiency results in undissolved O_2 gas bubbles in water which present two problems. First, low O_2 absorption efficiency increases operational costs and second, the undissolved O_2 gas bubbles can cause operational and safety problems. Therefore, it is most important to preclude loss of O_2 bubbles in the discharge of the O_2 transfer system for both economics and practicality.

Since pure O_2 is a commercial commodity, absorption efficiency drives the economics. To achieve high O_2 absorption efficiency, the pure O_2 must be kept in contact with the water for approximately 100 seconds. Since the rise velocity of bubbles is nominally about 1 ft/sec it would require a 100 foot deep column of water to achieve efficient absorption if O_2 bubbles were injected at the base. This is the basis of the oxygenation system Prof. Speece designed, tested and installed in the late 1970's to add 100 tons/day of D.O. to the hypolimnion of Clark Hill Reservoir on the Savannah River above Augusta (for development of the design to be used in the future Richard Russell Reservoir). The fine bubble diffusers located at a depth of 140 ft achieved 90% O_2 absorption efficiency. (Injection of pure O_2 into a bubble

diffuser at the bottom of a 15 feet deep aeration tank would result in unacceptably low O_2 absorption efficiency even if it was a fine bubble diffuser.)


The Speece cone oxygenation system is designed to address the crucial need to maintain large bubble swarms with their very high gas surface areas for O_2 transfer. The Speece cone maintains the O_2 gas in contact with the water for well over the required 100 seconds and thus achieves the prolonged O_2 gas detention times needed for highly efficient absorption of pure O_2 . The system combines the capability to efficiently dissolve pure O_2 as well as produce a highly superoxygenated discharge of 50 to >400 mg/L D.O. The water detention time within the cone is uncoupled from the O_2 bubble detention time and is much shorter. The turbulence within the cone caused by the high inlet velocity determines the hydraulic shear regime in the cone and maintains a large swarm of bubbles having relatively small bubble sizes with their high gas surfaces. The tendency for the bubbles to coalesce and collapse is countered by the continual hydraulic shear provided within the cone. Thus the large gas surface for O_2 transfer is continually maintained. The conical configuration of the Speece cone results in a progressively decreasing downward water velocity. The inlet velocity at the top of the column is designed to exceed the buoyant velocity of the bubbles as well as to counter the tendency of the bubble swarm to collapse and the large gas surface area of the bubble swarm is maintained. Thus, the O_2 bubbles cannot escape out the top. As the cone cross-section increases as the water moves through it, the downward velocity of the water toward the base of the cone becomes less than the buoyant velocity of the O_2 bubbles and consequently the bubbles are not lost in the discharge. Therefore, the detention time of the bubbles is prolonged to achieve highly efficient O_2 absorption.

The saturation concentration of D.O. and the O_2 transfer capacity of the cone are determined by the O_2 composition of the gas and the hydrostatic pressure. The D.O. concentration in the discharge of the Speece cone is related to the hydrostatic pressure within the cone. With pure O_2 and hydrostatic pressurization, it is easily possible to develop C_{sat} concentrations in the cone of 50 to > 400 mg/L and thus achieve high discharge D.O. of nearly comparable concentrations.

A system which efficiently dissolves pure O_2 and produces a highly superoxygenated discharge opens up a whole new realm of possibilities in water quality management not possible with conventional aeration techniques. Using pure O_2 the D.O. in the discharge is nominally 1 mg/L per 1 foot of absolute pressure of hydrostatic head in the cone. This, of course, varies with temperature and salinity. The hydrostatic pressure within the cone can be increased by placing the cone in an excavated caisson to achieve energy-free pressurization or the cone can be pressurized by pumping against a throttling valve on the discharge. Placing the Speece cone in a caisson for energy-free pressurization results in a unit energy consumption of about 300 kWhr per ton of D.O. dissolved. Whereas pressurization by pumping against a discharge valve results in a unit energy consumption of a little more than 1000 kWhr per ton of D. O.

When the Speece cone is pressurized by pumping against a throttling valve on the discharge in order to produce D.O. of 50 to >400 mg/L in the discharge, special attention to prevent effervescent loss of the high D.O. is required in the diffuser design to dilute the superoxygenated water quickly in the receiving water as will be addressed below. With proper design, D.O. concentrations in the 100's of mg/L range can be depressurized and diluted without significant effervescent loss of D.O.

Figure 1 shows the operating characteristics as the O_2 injection rate increases. The discharge D.O. concentration increases linearly with the O_2 injection rate up to the design point when pressure is held constant. The physics of gas transfer within the Speece cone are such that over 90% of O_2 absorption efficiency occurs up to the design O_2 injection load. In this range the cone is able to maintain the bubble swarm with insignificant loss of bubbles in the discharge. Below the O_2 design load of the cone, the bubble swarm is smaller and does not occupy the entire cone.

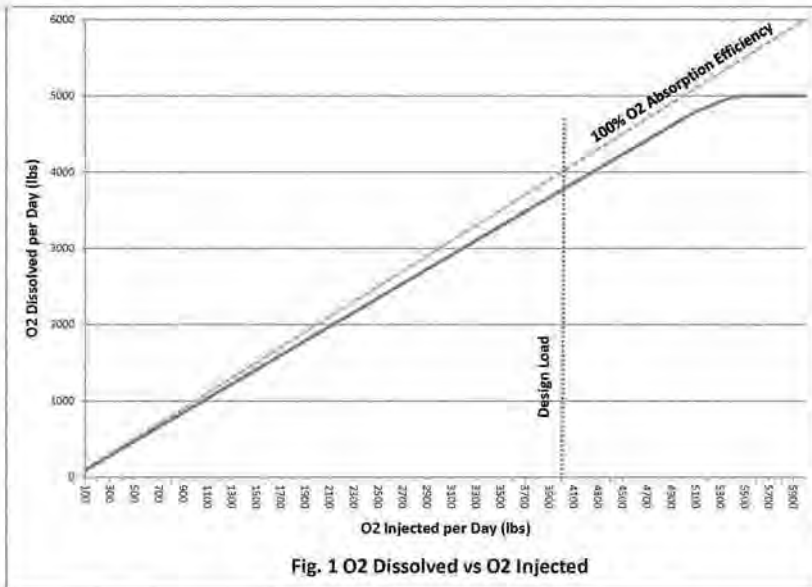

As the O_2 injection rate increases, a greater bubble swarm must develop to provide the increased bubble surface necessary to accommodate the demand for more O_2 absorption. However, there is a maximum bubble swarm which can be maintained in any given size of cone. When more O_2 is injected than is being dissolved, the bubble swarm grows beyond the capacity of the Speece cone to retain it and the excess O_2 bubbles are crowded out the bottom of the cone and lost in the discharge. Thus, the O_2 absorption efficiency is relatively constant at over 90% up to the maximum bubble swarm size. Any O_2 injected above this critical design rate is essentially all lost in the discharge.



It is to be noted that there is a fundamental difference between effervescent loss of highly supersaturated D.O. from the depressurized discharge and loss of O_2 bubbles that never were dissolved in the first place. The latter bubbles are physically crowded from the bubble swarm at an O_2 injection rate that exceeds the design load corresponding to a maximum bubble swarm volume that can be retained in the specific cone size. Effervescent loss of D.O. is characterized by tiny bubbles (<0.1 mm diameter) which barely disturb the surface when they emerge and O_2 bubbles that were never dissolved

in the first place and which are about 10 to 20 times larger in diameter and are readily observed breaking at the water surface. Even though the 2008 study discharge D.O. was 150 mg/L at 34 feet below the surface (i.e.) 208% saturation at that depth ($150/2 \times 36 = 208\%$), the discharge was diluted in less than a second by the ambient low D.O. water. Thus negligible effervescent loss from the very high D.O. occurred.

In the pilot demonstration project in Savannah Harbor, there were occasions when considerable loss of larger bubbles was noted in the discharge to the harbor. Examination of the data revealed that during these times the O_2 injection rate was considerably above the design loading, resulting in massive loss of undissolved O_2 gas in the discharge. In summary, when the O_2 injection rate is below the design load, over 90% O_2 absorption occurs. When the O_2 injection rate exceeds the design load, there is essentially 0% O_2 absorption efficiency of that portion of O_2 which exceeds the design loading.

Figure 2 shows the O_2 absorption efficiency at constant cone pressure as a function of the O_2 injection rate. This plot demonstrates that the O_2 absorption efficiency exceeds 90% all the way up to the design load. As mentioned above, at this point, the bubble swarm volume that can be maintained within a given cone cannot further increase due to physical limitations and any O_2 injected above the design load is not absorbed.

Figure 3 indicates that O_2 absorption efficiency is maintained constant at approximately 94% efficiency at design O_2 loading over a pressure range of 0 to 100 foot of head and above i.e. pure O_2 absorption efficiency is independent of the hydrostatic pressure in the cone. The discharge D.O. increases linearly with hydrostatic pressure within the cone at design O_2 loading over this range up to 100 feet of head and above.

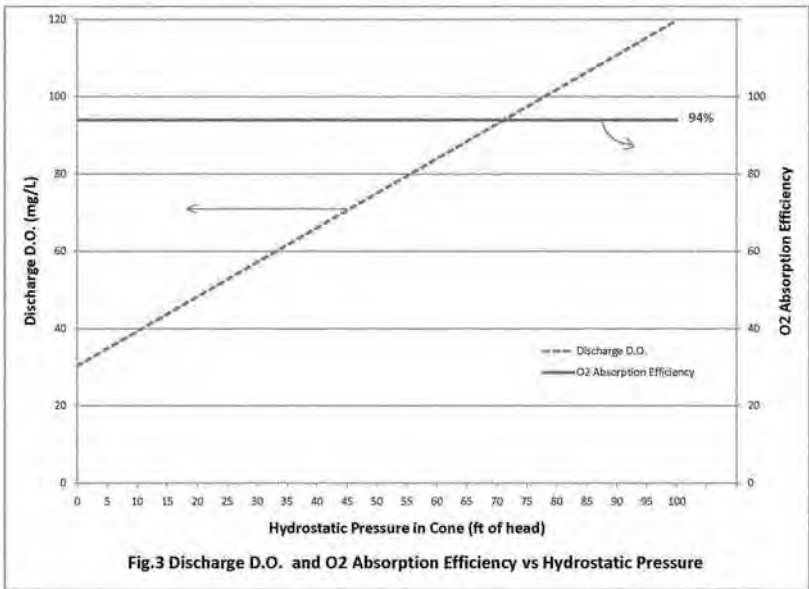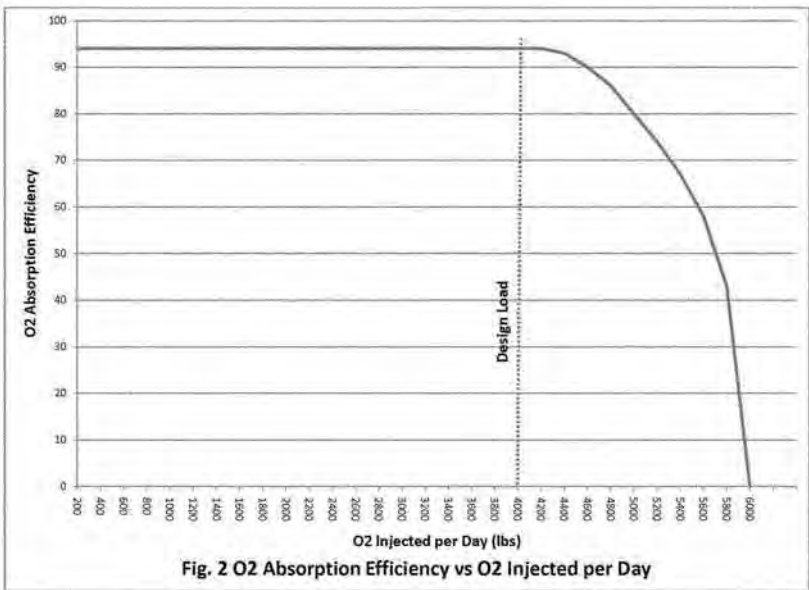

2.3.2 Conditions Required for Precluding Effervescence to Achieve Retention of High D.O. (>400 mg/L) Conditions in the Discharge

Effervescence is a phenomena whereby a dissolved gas comes out of solution in water as tiny bubbles (<0.1 mm diameter) from a liquid having a highly supersaturated concentration of D.O. There is a common misconception that when dissolved gas concentrations exceed 100% saturation that effervescence results with the dissolved gas level quickly dropping to 100%. This is commonly based on the visual observation of vigorously shaking a champagne bottle and popping its cork or of pouring a can of Coke into a glass. Indeed effervescence is a critical phenomena which must be addressed when dealing with supersaturated D.O. concentrations in water. However, with proper diffuser/depressurization design, effervescence is successfully precluded.

Effervescence is generally controlled by the following parameters:

- Supersaturation concentration
- Time
- Turbulence
- Temperature
- Presence of colloids

By manipulation of these parameters, effervescence can be either maximized or prevented, whichever is the design objective. The most common example of effervescence, dissolved air flotation, effervescence is designed to be maximized. Therefore, a very high supersaturation level is achieved by operating the gas transfer vessel pressure at ~75 psig. This results in a saturation level that approaches 600%. In order to enhance turbulence in the discharge from the saturator, a pressure letdown nozzle is directed at a flat plate for maximum turbulence. This combination of exceptionally high supersaturation concentrations and exceptionally high turbulence in the discharge results in rapidly reducing the supersaturation concentration down to some level above 100%. It is of note that very high supersaturation levels are required to achieve efficient effervescence of the dissolved gas. As will be documented later in this report there is an effervescence threshold level of nominally between 170 to 240% supersaturation, below which effervescence cannot be induced even with high turbulence levels.

As a point of reference, the pressure in a Coca Cola can at room temperature exceeds 45 psig due to pressurization with CO₂, which corresponds to about 400% CO₂ saturation for taste appeal (this also allows the cans to be stacked on top of each other without crushing). This corresponds to dissolving about 3.7 volumes of CO₂ per volume of Coke. Thus a 355 ml can of Coke contains over 1300 mL of CO₂. If a Coke can is allowed to sit for about 10 min. so that any tiny bubbles rise to the surface, and the can is opened, less than 50 mL of CO₂ escapes in the first minute. Thus, over 96% of the dissolved CO₂ remains in solution during this period, even though it is at a highly supersaturated condition. Coca-Cola personnel estimate that it takes about two hours for all of the dissolved CO₂ to escape if the can is opened under quiescent conditions. On the other hand, if a Coke can is vigorously shaken, so that a

multitude of tiny bubbles is entrained, creating a very high gas bubble surface area, and the can is subsequently opened, it immediately foams over due to the loss of a high amount of dissolved CO_2 .

Water in the Columbia River normally is passed through electricity turbine generators and discharged below the downstream surface with none flowing over the spillway. However during flood flows the turbine generators cannot accommodate the entire flow and spillway discharge is required during these times. Supersaturation of the water flowing over Columbia River dams, which suck in air at the plunge point and drag the air bubbles deep into the stilling basin, results in total dissolved gas levels exceeding 130% saturation downstream. Due to the very low surface gas exchange coefficient of the deep, slow moving Columbia River, it has been observed that after flowing 80 miles, more than two days, there is an insignificant reduction in the 130% saturation level of the water.

It has also been observed that in farm ponds which are highly eutrophic, with resulting high algal activity, the D.O. rises to as high as 30 mg/L in the middle of the afternoon and persists for hours. These examples prove that a D.O. concentration considerably above 100% saturation is required to cause effervescence.

2.3.3 Discharge Diffuser Design Criteria

The Speece cone designed for the Back River will have a discharge D.O. of 40 mg/L (111% saturation at the surface but only 77% at the discharge point 15 ft below the surface). This is dramatically lower than the 2008 demonstration system in which the D.O. was raised to 150 mg/L (208% saturation at discharge depth of 34 feet). Effervescence in the Back River location is precluded because the discharge D.O. is not 100% saturated at the discharge depth.

The Speece cone can be designed to raise the D.O. in the discharge to >400 mg/L. In these cases, careful attention must be paid in the design of the discharge diffusers which mix these very high D.O. levels with the receiving waters and quickly dilutes the D.O. to below the effervescent potential concentration of 170 to 240 % saturation (as described below).

If it is desired to retain highly supersaturated D.O. in solution after discharge from the Speece cone, special measures can be taken to avoid effervescent loss of highly super oxygenated water. Since effervescence requires a finite period of time for the D.O. to come out of solution, if the highly supersaturated water is quickly diluted with water containing only a few mg/L of D.O., there is insufficient time for the effervescent bubbles to form before the D.O. concentration is diluted below its effervescence potential.

The higher the D.O. supersaturation, the quicker the discharge must be diluted below the effervescence potential to preclude effervescent loss of D.O. Thus the proper design of the discharge diffuser to minimize the time before dilution to below the effervescence potential level is paramount. At very high supersaturation D.O. concentrations in the Speece cone discharge, the discharge must be depressurized, diluted and distributed in the receiving water quickly in order to minimize the time at which the superoxygenated discharge is at reduced pressure.

The jet from a diffuser is rapidly mixed/diluted with the receiving water. The dimensions of the undiluted core of superoxygenated water exiting from the port of a diffuser are a function of:

- Superoxygenation concentration in jet
- Port diameter
- Jet velocity (pressure drop across discharge port)
- Port spacing
- D.O. in receiving water

The impact of a diffuser design can be easily modeled to show the mixing and dilution effects.

It has been shown that water containing >100 mg/L of D.O. (>200 % saturation) can be effectively diluted into D.O. free water in a BOD bottle with no effervescent loss of the D.O. This has been a demonstrated laboratory technique for measuring D.O. concentrations much above that possible with electronic D.O. meters.

Figure 4 is a cross section of a diffuser header with multiple discharge ports. The shaded area represents superoxygenated water that is undiluted. As the undiluted water is forced through the discharge ports, its high velocity generates considerable shear/entrainment in the surrounding water containing low D.O. Consequently, the plume is eroded and diluted by the surrounding water, which contains low D.O. The duration of time for which the discharge jet is undiluted is very short and thus rapidly diluted down below the effervescence potential.

Figure 5 shows the cross-section through the diffuser jet versus the D.O. concentration. The cross-section AA initially contains ambient water with the ambient D.O. concentration. The D.O. then abruptly increases to the concentration coming out of the port and then abruptly decreases to the ambient D.O. concentration. Cross-section BB, which is located farther from the face of the diffuser nozzle still contains some undiluted discharge water and is characterized by an increasing concentration next to the jet because of entrainment of the ambient water with the superoxygenated water. Then the concentration in the undiluted core equals the discharge from the header and then subsequently tails off on the other side. Cross-section CC is taken beyond the distance where the undiluted jet exists and shows an elevated concentration that rises and peaks at the centerline of the jet at some level, much less than the superoxygenated water in the diffuser and tails off symmetrically on the other side. The object of the diffuser design is to dilute the superoxygenated water quickly below its effervescence potential. This is done by mixing it with the ambient water in the high turbulence jet.

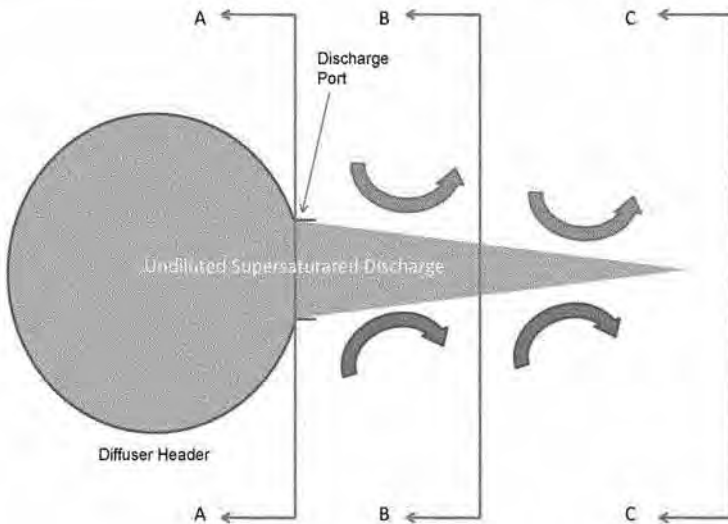


Fig. 4 Schematic of Mixing in Diffuser Jet

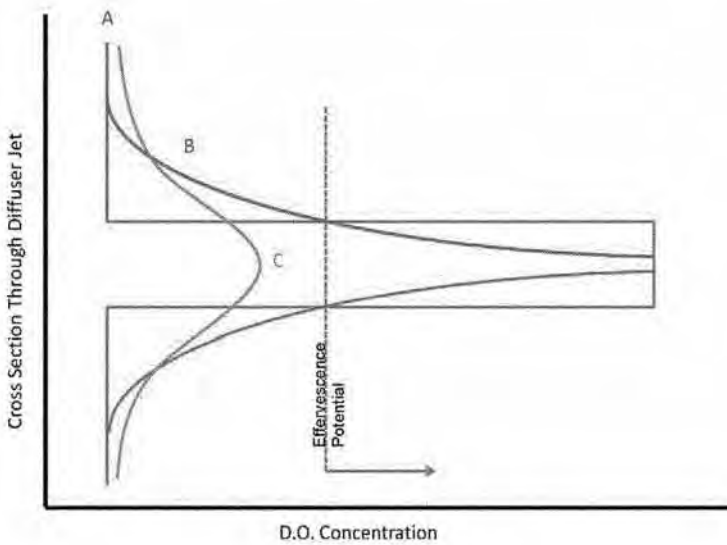


Fig 5. D.O. Profile in Diffuser Jet

In summary all of the pressure drop must occur at the discharge port to minimize the time at which discharges are highly superoxygenated and thus capable of supporting effervescent loss of D.O.. In such a case, the jets coming from the discharge port will be rapidly diluted with the ambient water in less than a fraction of a second. There is a cone shaped volume of undiluted water coming out of a discharge port and it is crucial to minimize the time before its dilution to below the effervescence potential level. The undiluted core of superoxygenated water exiting the discharge port will be rapidly mixed with the ambient water within a distance of nominally less than 10 diameters of the discharge port (depending on the parameters listed above). If the pressure within the cone was 34 feet of hydraulic head, the discharge velocity through the port would be approximately 50 ft/sec ($V^2 / 2g = H_1$). And if the ports were 2 inches in diameter, then 10 diameters would be 20 inches and at 50 ft/sec, then the duration of time that the undiluted water would exist in the jet core would be 0.03 seconds. The high velocity jet also results in more than a 10 fold dilution of the jet with the receiving water in a fraction of a second. This rapid dilution in the high velocity of the discharge/depressurization port is crucial for rapid dilution of highly superoxygenated water to below its effervescence potential.

Even though the Speece cone's capacity to dissolve oxygen does not change in shallow water, the diffuser design becomes more critical in shallow water installations. However the Speece cone design for the Back River system only raises the D.O. to 56% of saturation at the discharge depth and is thus incapable of effervescent loss of D.O. Therefore the diffuser design only needs to insure distribution of the superoxygenated discharge across the Back River.

2.4 Superoxygenation Discharge into "Shallow" Waters


It has been reported by Jones in a publication describing pure O₂ supplementation to the San Joaquin ship channel in Stockton, California, that the Speece cone was inappropriate for applications when discharging into shallow waters. Unfortunately, this is an unsubstantiated conclusion. The Speece cone can be successfully operated to discharge into shallow waters. The Speece cone can be operated to discharge a D.O. level which is at the D.O. saturation level of the shallow water whereby precluding the potential for effervescence. Secondly, highly superoxygenated water can be discharged into a depth of water of 1 foot with nil effervescent loss of D.O. if the diffuser is properly designed to quickly dilute the superoxygenated water with ambient D.O. water and there is transport/movement to carry away the D.O. dissolved therein.

In California, Farrelledean reports that the aquaculture industry uses superoxygenation of a side stream for maintenance of the D.O. at >8 mg/L in the fish rearing tanks. In one preliminary study, the superoxygenated side stream coming into the fish tank had 117 mg/L of D.O. The superoxygenated side stream is quickly mixed with the 29°C water in an 8 ft deep tank and no effervescence was observed.

2.5 Example Speece Cone Installations


2.5.1 Gowanus Canal

The Gowanus Canal is a sea level, dead end canal constructed in Brooklyn N.Y. in the 1800's. It is about 9 feet deep at the head end and less than 2 miles long and has very little replacement of the stagnant water at the head end. Consequently it was a major odor source. Many years ago a tunnel and pump station were constructed to bring in fresh sea water to flush the canal and eliminate the odor source. Recently rehabilitation of the pump station was required and a means for maintaining oxic conditions within the canal during this 2 year period of construction was needed. A Speece cone oxygenation system was installed and pumps about 5,000 gpm of water from the canal, superoxygenates it to about 50 mg/L D.O. and discharges it into a half mile long, submerged, distribution header/diffuser system. This distribution header/diffuser is attached on one side of the canal. It maintains the head end of the canal at about 14 mg/L D.O. under summer conditions.

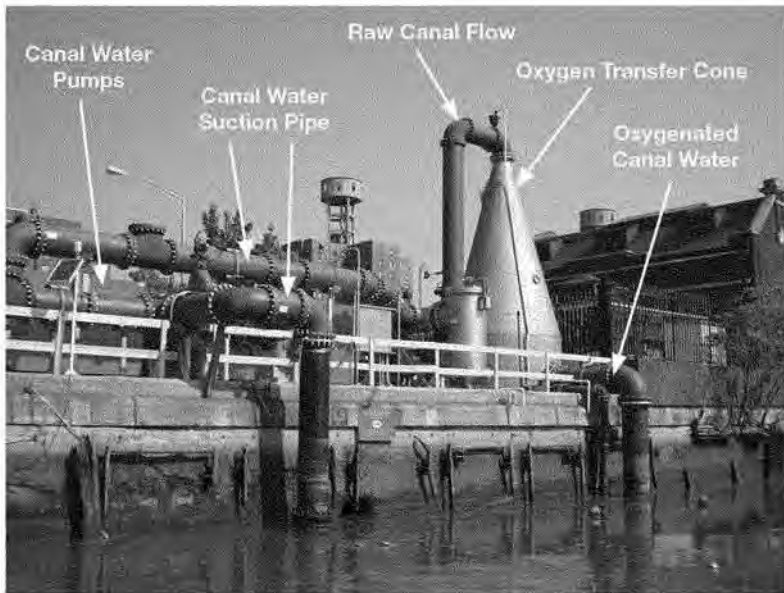

2.5.2 Paper Mill Wastewater Oxygenation

A Speece cone superoxygenation system was installed at a paper mill to superoxygenate the treated discharge to an elevated D.O. level which was sufficient to maintain oxic conditions throughout the length of a five-mile long force main (five hours detention time). A basin with 9 ft water depth received the treated discharge. Water from this basin was pumped as a sidestream through a Speece cone located in a 65 foot deep caisson at a flow rate of 14 ft³ per second and a temperature of 27.8°C. The discharge D.O. was 81 to 83 mg/L (230% saturation). The O₂ absorption efficiency exceeded 90% in the Speece cone. The Speece cone discharge having a D.O. of 81 to 83 mg/L was discharged back into the 9 foot deep basin and diluted to 32 mg/L with less than 3% of the initial D.O. lost due to effervescence.

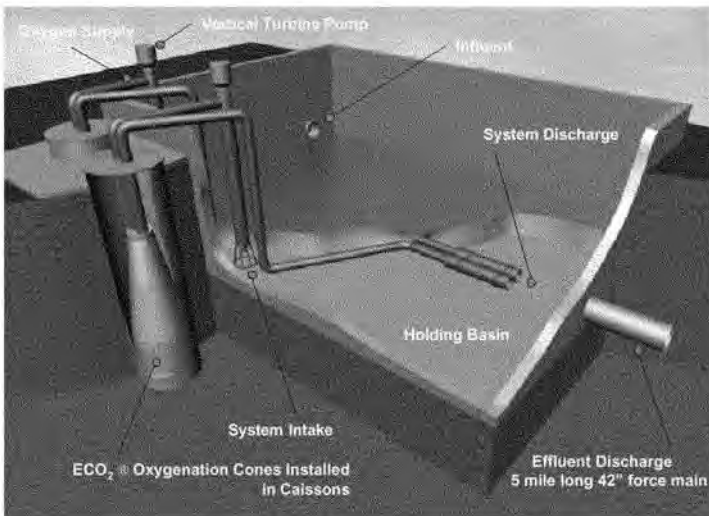

2.5.3 Logan Martin Dam

Logan Martin Dam on the Coosa River in Alabama is operated for peaking power production. During off peak periods of electricity demand, no flow occurs. Due to the fact that the foundation of the dam is channeled karst that was not 100% grouted, leakage of 700 CFS occurs underneath the dam. This large volume of leakage water is deficient in D.O. and causes stress to the aquatic life in the 35 foot deep tail water.

In order to rectify the unacceptably low D.O. during the night and over the weekend when water is not discharged through the turbines, a Speece cone oxygenation system was installed. Water is taken through a siphon over the dam and conducted through the Speece cone located at the base of the dam. The water is raised to approximately 50 mg/L D.O. in the Speece cone and then immediately diluted by discharge 15 feet below the surface. A relatively high D.O. is added to the small side stream without effervescent loss when it is discharged into the tail water. This system adds approximately 6000 pounds of D.O. per day to the tail water and effectively relieves the stress on the resident fishery. This cone is 9 foot in diameter and 20 feet high. It handles a flow of 24 cfs of water at 86°F. The system achieves 94% of the theoretical saturation concentration of D.O. within a residence time of 30 seconds due to the exceptionally high gas transfer surface area provided in the bubble swarm.



2.5.4 Tombigbee River

In the 1980's Prof. Speece designed a U-Tube oxygenation system for the Tombigbee River between Alabama and Mississippi for supplementing D.O. near an industrial complex. The Tombigbee River was less than 35 ft deep at this location. The U-Tube oxygenation system pumped 120 MGD of water from the Tombigbee down through the 175 ft deep U-Tube and raised the D.O. to ~50 mg/L in the discharge which was then sent to a diffuser installed across the bottom of the river for dilution with the main flow of the river. This system could add ~40,000 lbs D.O./day to the river and no effervescent loss occurred after discharge to the river. This system operates on an as needed basis at low flow conditions in the river.

2.5.5 Laboratory Studies to Define Effervescent Loss of Highly Superoxygenated Water

Laboratory studies were conducted by Prof. Speece to determine the residual D.O. in superoxygenated water after depressurization occurs and all effervescence has ceased. This was used to determine the D.O. below which effervescence did not occur i.e. the effervescence threshold. Various methods of depressurization were evaluated and the dilution requirements to preclude effervescent loss of the D.O. were determined.

A. Quiescent Depressurization of Superoxygenated Water

Water was saturated with pressurized pure O₂, then progressively depressurized until the occurrence of effervescence was noted. Water was placed in a pressure vessel with a pure O₂ headspace that was connected to an O₂ pressure cylinder. The pressure inside the water pressure vessel was maintained by a pressure regulator on the discharge from the O₂ cylinder. Then the vessel was agitated for a prolonged period of time until the water reached saturation equilibrium with the pressurized O₂ headspace. The various pressure levels were over a range of 4 to 10 atm of pressure achieving 150 to 400 mg/L D.O. After the water reached equilibrium at the study pressure, the system was slowly depressurized until effervescence was noted to commence. Over this entire pressure range of 4 to 10 atm of pressure it was observed that whenever the D.O. concentration exceeded 170% saturation, that effervescence would commence. Below 170%, D.O. saturation, effervescence was not observed upon depressurization.

Figure 6 shows the results of supersaturating water with D.O. in a pure O₂ headspace at pressures up to 125 psig. The system was abruptly depressurized to ambient conditions and allowed to effervesce. After all effervescence has ceased, the D.O. concentration was in the range of 100 to 160 mg/L. This indicates that the effervescence threshold was above 200 to 300% saturation.

Figure 7 shows another study tap water was placed in a pressure vessel with a pure O₂ headspace and the pressure was raised from 4 to 10 atm. Subsequently, the pressure was gradually reduced and it was observed that whenever the D.O. concentration exceeded 200 to 300% saturation, effervescence would occur. No effervescence was noted below these levels.





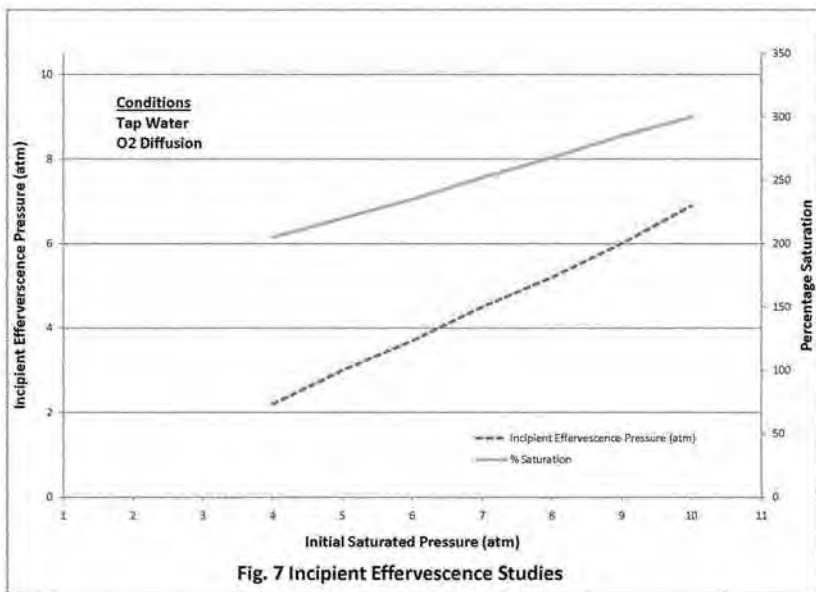


Figure 8 shows the residual D.O. in a system that was pressurized with pure O_2 in the headspace at a temperature of $29^\circ C$ to 185 mg/L D.O., The system was abruptly depressurized and the D.O. was measured after all effervescence ceased. This experiment was conducted over a range of bentonite concentrations from 0 to 400 mg/L. Bentonite serves as a colloidal nucleation agent to enhance effervescence. Above a concentration of approximately 60 mg/L of bentonite, the residual D.O. was constant at approximately 150 mg/L (~400% saturation).

Figure 9 shows that the residual D.O. after all effervescence had stopped are approximately 150 mg/L with tap water saturated with pure O_2 at pressures of 45 to 120 psig.


Figure 10 shows that as long as D.O. was less than 170% saturation no effervescence will occur. Thus, 170% D.O. saturation was the effervescence potential threshold.

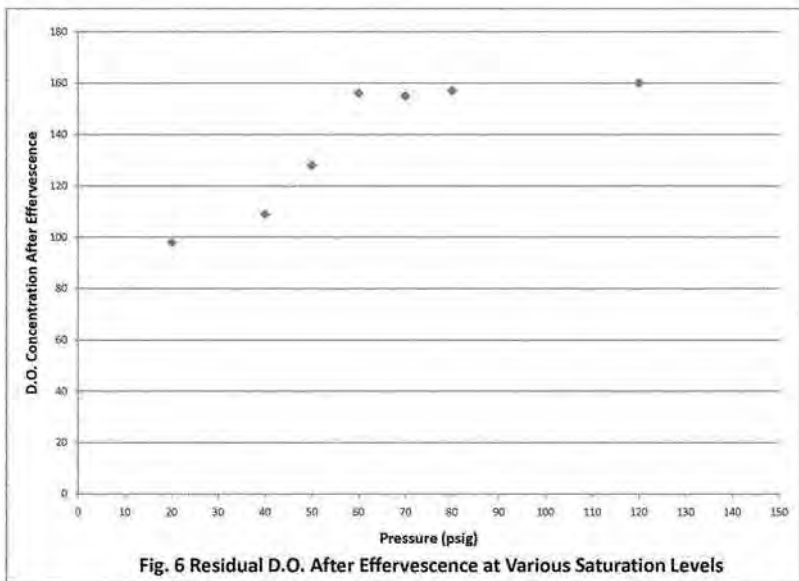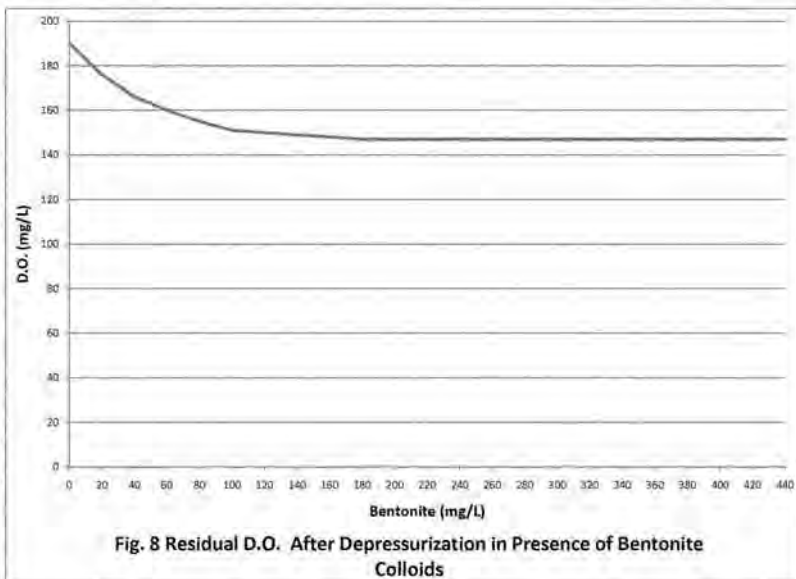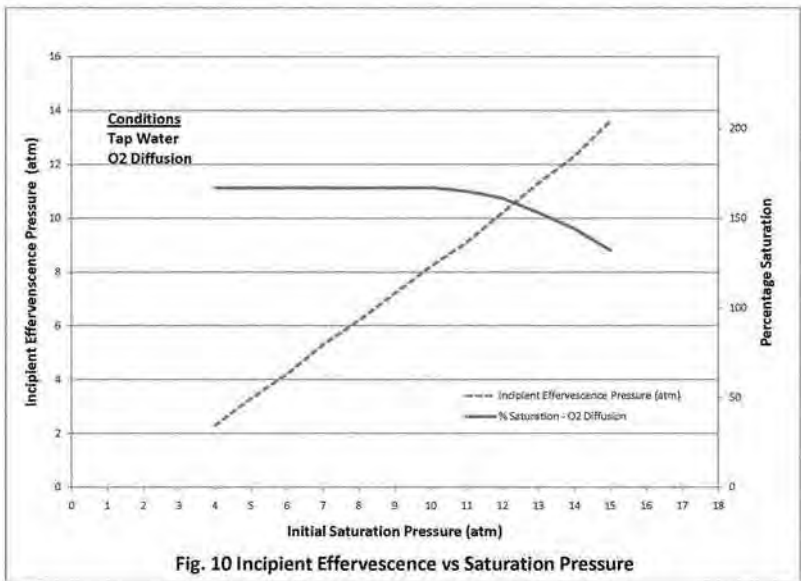

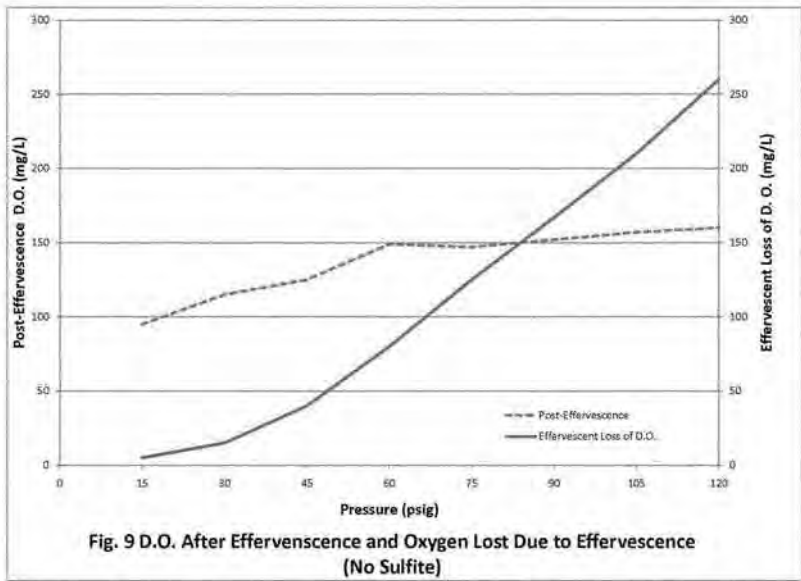

B. Turbulent Depressurization of Superoxygenated Water

Figure 11 shows tap water was saturated at a pressure of 9 atm with pure O_2 , and the vessel was depressurized while being stirred and the D.O. was recorded for various stirring times. The D.O. deficit initially was approximately 280 mg/L (320 mg/L D.O.). Upon depressurization while being mixed, the D.O. deficit dropped to approximately 60 mg/L, (which would correspond to 100 mg/L D.O.) within 3 min. No further effervescence was noted after 3 min. The D.O. deficit then decreased in a linear manner up to 10 min. when the D.O. deficit was 35 mg/L (the actual D.O., was 75 mg/L). The purpose of this curve is to show that no effervescence potential was noted below a D.O. deficit of 80 mg/L, (corresponding to 120 mg/L D.O.). It is also noteworthy that it took about 60 seconds for the D.O. deficit to drop from 280 to 95 mg/L. The curve shows that if D.O. can be diluted below its effervescence potential within a fraction of a second, no loss of highly superoxygenated D.O. will occur. Thus, rapid dilution is a means of retaining the highly superoxygenated D.O. in solution.

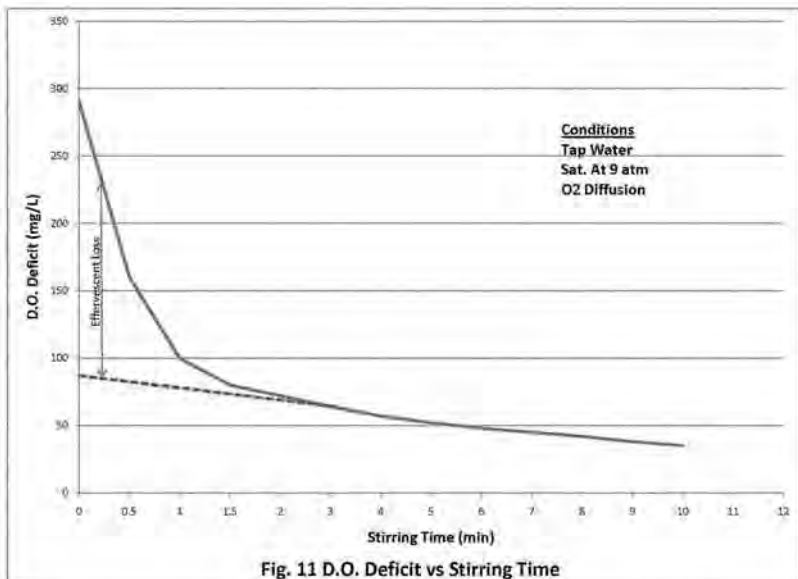

In another study, using a pressurized pure O₂ headspace at 45 psig, tap water was brought to 165 mg/L D.O. in equilibrium with the pressurized headspace and then passed through a throttling valve with the following pressure drops across the throttling valve:

45, 30, 15, and 0 psig.

After all effervescence had ceased, the residual D.O. was measured and found to be:

87, 83, 87, and 89 mg/L of D.O. (~230% saturation).

In another study, water was brought into equilibrium with a pure O₂ atmosphere at 100 psig, corresponding to a saturation concentration of 328 mg/L, D.O. It was then passed through a throttling valve with the following pressure differential across the valve of 100, 30, 15 psig. The residual D.O. was then measured after all effervescence had ceased and found to be respectively:

65, 77, and 89 mg/L of D.O. corresponding to:

176, 208 and 240% saturation.

In another study, tap water at 27.4°C was used to evaluate a 15 psig pressure drop after equilibrium at the following pressures:

15, 30, 45, 60, 100, 150, and 200 psig.

The D.O., after equilibrium with the pure O₂ pressurized headspace was correspondingly:

81, 122, 163, 203, 312, 447, and 584 mg/L.

After passing water with these respective concentrations of D.O. across a 15 psig throttling valve, the D.O. was measured in the discharge after all effervescence had ceased and found to be respectively:

65, 90, 76, 77, 85, 89, and 89 mg/L D.O..

These values correspond to:

173, 240, 206, 205, 230, 237 and 237% saturation after all effervescence ceased.

C. Dilution Requirements to Prevent Effervescent Loss of High D.O.

Figure 12 shows water at 28°C was brought to equilibrium with pure O₂ at a pressure of 60 psig. (185 mg/L D.O.). The discharge of this highly superoxygenated water was immediately diluted with ambient D.O. (8 mg/L D.O.) tap water. Increasing dilution flow resulted in increasing retention of the D.O. mass in solution. At approximately 2 volumes of dilution flow with the ambient D.O. (8 mg/L) water per volume of superoxygenated water with 185 mg/L D.O., 95% of this original D.O. mass was retained in solution. The D.O. at this dilution would be 62 mg/L i.e. 170% saturation.

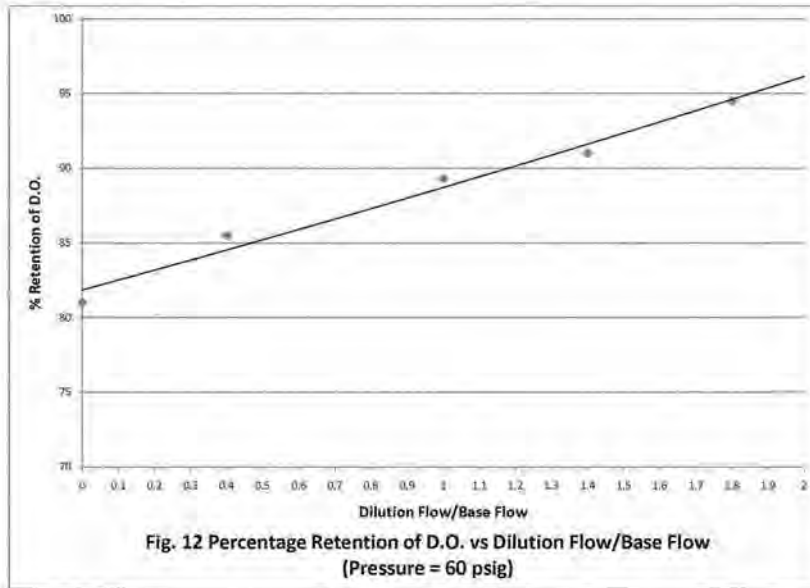


Figure 13 shows water at 28°C was brought to equilibrium with pure O_2 at a pressure of 90 psig, i.e. 250 mg/L D.O. The discharge from this pressure vessel was immediately diluted with a range of flows with ambient air saturated water containing 8 mg/L D.O. The percent retention of D.O. mass in solution reached approximately 95% when the dilution flow was three times the base flow. Again the diluted concentration was 62 mg/L D.O. and 170% saturation.

Figure 14 show a series of studies was conducted in which water was brought to equilibrium with a pressurized pure O_2 headspace over a pressure range of 45 to 90 psig. The superoxygenated water from this pressurized reactor was then immediately diluted into a cobalt catalyzed sulfite (for scavenging the D.O. and thus maintaining 0 mg/L D.O. in the water) reservoir of water and the volume of effervescent O_2 was measured. At a pressure of 45 psig, corresponding to 148 mg/L D.O., there was no detectable loss due to effervescence because of the immediate dilution. Even at 90 psig, corresponding to 259 mg/L D.O., only 10% loss of the D.O. was noted after depressurization into a cobalt catalyzed sulfite reservoir of water.

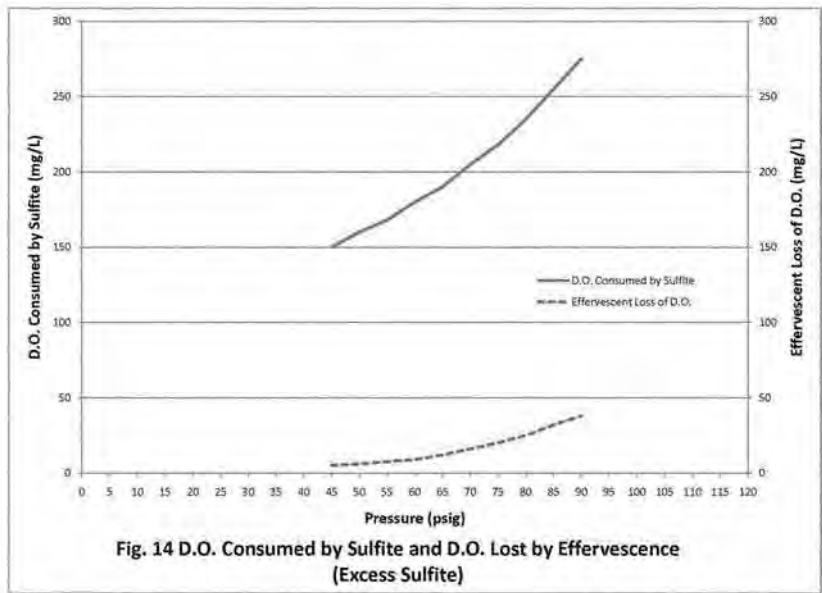
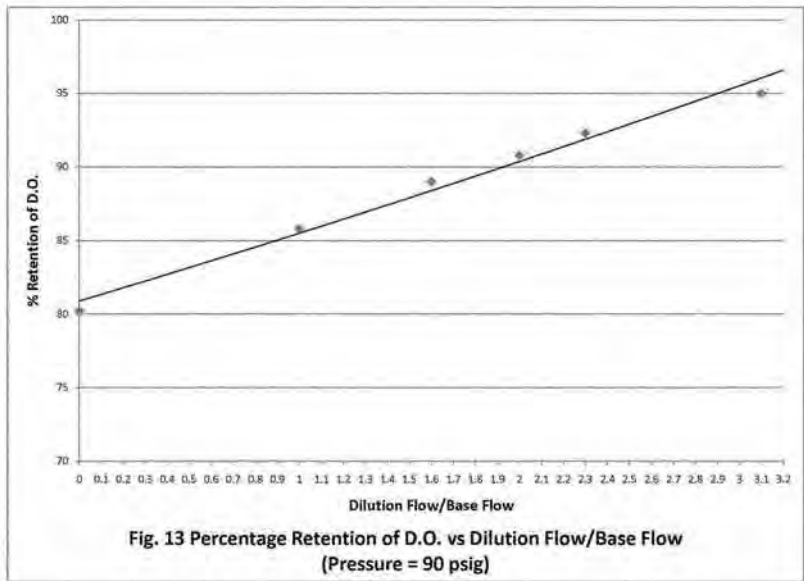


Figure 15 graph shows the D.O. and the pressurized discharge versus the pressure maintained at equilibrium in the pressure vessel. There is a linear increase in D.O., in the discharge versus pressure that corresponds to about 90% of theoretical saturation. The retention of D.O. after discharge directly into tap water containing cobalt catalyzed sulfite was 100% at 45 psig and about 90% D.O. retention at 90 psig.

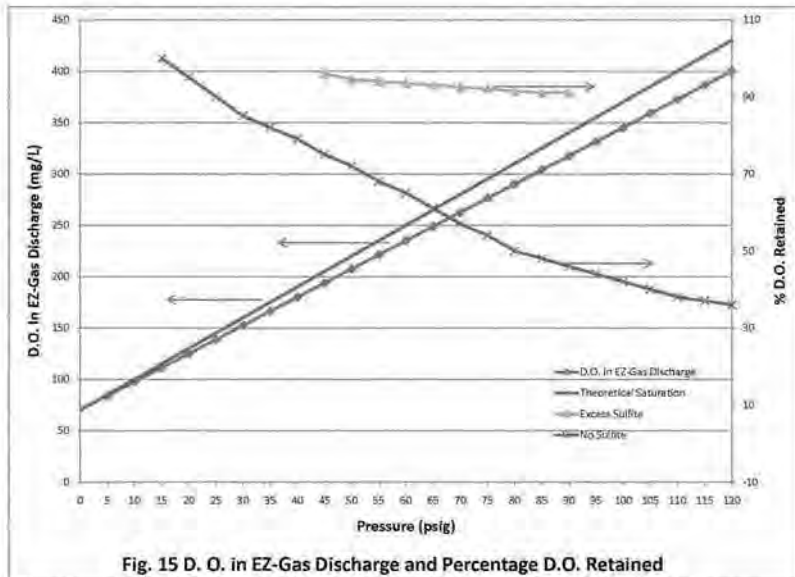


Fig. 15 D.O. in EZ-Gas Discharge and Percentage D.O. Retained

Back pressure studies were conducted in which superoxygenated water was raised to 180 mg/L of D.O. and discharged into a reservoir at the equivalent of 50 feet below the surface and no effervescence loss of D.O. was observed. When water was raised to 140 mg/L of D.O., it could be injected 20 feet below the surface with no effervescent loss of D.O.

2.6 Tidal Mixing and Slack Tide

The two key requirements for supplemental oxygenation of a surface water body are:

- Means of supplementing the D.O.
- Means of transporting the oxygenated water away from the location where it is added.

There is significant tidal mixing to transport the oxygenated water away from the point where it is being injected in Savannah Harbor except at the very head of the estuary. The locations where the Speece cones are to be located have significant tidal transport mixing. However at slack tide, mixing transport of the water ceases for a period of less than an hour. During this period, the D.O. will accumulate in the vicinity of the O_2 injection station. At the rate which D.O. is being supplemented to the Back River

region $\sim 4,000$ lbs D.O./day, into a cross section of 1,500 ft wide by 15 ft deep by an assumed length of 100 ft for the diffuser influence (a volume of $2,250,000 \text{ ft}^3$), it would take about 52 hours of slack tide for the D.O. to accumulate to 13 mg/L. Thus in the relatively short slack tide interval of less than an hour, the D.O. in the vicinity of the D.O. supplementation station will only increase less than ~ 0.5 mg/L above steady state, not impacting the fishery with an unacceptably high D.O. environment. Thus slack tide will not significantly impact the performance of this oxygenation station.

2.7 Recommendations

The ECO2 oxygenation design for Back River will only result in 77% saturation of D.O. at the 15 ft depth at which it will be depressurized and discharged. Therefore effervescent loss of D.O. is not even possible. Aquaculture installations successfully discharge superoxygenated water at 29°C and having a D.O. of 117 mg/L into 8 ft deep tanks and observe no effervescent loss of D.O. because of the rapid dilution achieved with the ambient D.O. water in the tank. Three examples are given of operating ECO2 Speece cone systems which superoxygenate a side stream of water and discharge it into "shallow" water with negligible loss of D.O. due to effervescence e.g. Logan Martin Dam on the Coosa River in Alabama (50 mg/L), Gowanus Canal in Brooklyn (50 mg/L) and a paper mill discharge (81 mg/L). For highly superoxygenation concentrations of 100 to >400 mg/L D.O. proper design of the depressurization/dilution diffuser is important to efficiently retain the D.O. mass in solution by minimizing effervescent loss of D.O. Results of laboratory studies to determine effervescent loss of D.O. from highly superoxygenated water reveals an effervescence threshold of nominally 170% to 240% saturation below which effervescence does not occur, regardless of the turbulence or nucleation sites involved. Studies have demonstrated that with proper depressurization/diffuser design, D.O. concentrations of >250 mg/L can be retained in solution with 95% mass efficiency. Lower D.O. concentrations can be 100% retained in solution.

3. Bathymetry of Back River

The Savannah District recently completed a hydrographic survey of the Back River in June 2011. The downstream extent of the survey was at the Tide Gate structure and the upstream was at New Cut closure. The hydrographic survey was provided to Tetra Tech in xyz format on June 21, 2011.

Figure 16 shows the bathymetric data plotted and the variations in the Back River. Figure 17 is a close-up view of the discharge point.



Figure 16 Bathymetry on the Back River (Data collected June 2011, USACE Savannah District)

The 2011 bathymetric data assisted in locating the water depth that would be appropriate for the oxygen injection discharge. The proposed discharge will be located on the Back River just downstream of the aeration lagoon on Hutchinson Island. Discharge point shown with an arrow in Figure 17 with a depth of approximately 15 feet of water.



Figure 17 Close-up Bathymetry of Discharge Location (Data collected June 2011, USACE Savannah District)

4. Diffuser Design Calculations

Tetra Tech reviewed and identified pertinent sections of previous analyses performed on the Savannah Harbor hydrodynamic and water quality models and oxygen injection systems, with a focus on the depths and dynamics of Back River. A diffuser design spreadsheet was developed to calculate the head loss at the effluent pipe and minimum velocity required for the diffuser.

In order to accurately demonstrate how a Speece cone would perform in shallow water, Tetra Tech created multiple designs for the Back River location to compensate for the shallowness of the river. The design that created the most head losses was chosen so that effluent flow would dilute before approaching the water surface. This design was broken into three parts: influent, Pump to Speece cone, and effluent. A description of each part is given below.

- **Influent** – The influent entrance will be 3.5 feet from the river bottom. There will be a 90-degree turn piece installed. From here, 25 feet of 24-inch diameter ductile pipe is laid at a depth of 15 feet into the Savannah River. Once the pipe reaches the river's edge, a 45-degree angle will be installed and the pipe will travel 21 feet along the river's edge. Another 45-degree angle will be placed at the top of this pipe so that the pipe can now travel parallel with the ground. The pipe will travel 75 feet parallel with the ground. The pump will be located at the end of the 75 foot pipe. For the influent design, a total of 121 feet of 24-inch diameter ductile pipe will be used.
- **Pump to Speece cone** – From the pump, 600 feet of 18-inch diameter ductile pipe will be laid. At the end of the 600 feet, a 90-degree turn will be installed so that the water will flow up. From here 27 feet of pipe will be installed. At the end of this, another 90-degree turn will be installed, pointing downstream and parallel with the ground. From there, 6 feet of pipe will be installed with a 90-degree turn at the end of that, pointing towards the ground. This 90-degree turn will enter into the Speece cone. The total amount of 18-inch piped used in this section is 633 feet.
- **Effluent** – As the water exits the Speece cone, it will enter a 14-inch diameter ductile pipe. This pipe will be 73.25 feet long, aiming perpendicular to the river. This pipe will reach the river's edge. From here, a 45 degree angle pipe will be placed so that the water can travel parallel with the river's edge. A pipe 21 feet long will extend into the river. At the end of this, there will be a 45-degree angled turn will be installed so that the water can travel parallel with the river bottom. The 866.75-foot long pipe will lay parallel to the river bottom. Diffusers will be attached to this pipe, with the outflow at the same height as the inflow. The first diffuser will be located 145.75 feet from the beginning of the pipe, then each diffuser will be installed after every 100 feet. This will allow the dissolved oxygen to be more evenly distributed throughout the Back River. The total amount of 14-inch diameter ductile pipe used for this part of the design is 940 feet.

The total amount of pipe used for the entire design is roughly 1,694 feet. Using this value as well as the total amount of turns used in the design, the total head loss for the entire system could be determined. After finding the total head loss, the ideal pump could be determined. Tetra Tech determined that the Godwin CD500M C15 460 Horsepower pump would be the best for this project. This is the same pump used in the initial testing by MACTEC. It was determined that this pump would not cause cavitation under these conditions. It was also determined that the Speece cone would pump 40 mg/L of dissolved

oxygen (17.34 psi) into the river. Once all of these factors were considered, Bernoulli's equation was used, which showed that the effluent velocity would be 38.61 fps. Using this value, it was calculated that 8 diffuser ports, each with a diameter of 4 inches, would be required for this design.

The spreadsheet calculates the head loss through cone and pipe system. It calculates the effluent velocity which is critical in the mixing zone calculation. The following calculations are included in the spreadsheet.

$$\text{Pipe Head Loss} = 0.002083 \bullet L \bullet \left(\frac{100}{c} \right)^{1.85} \bullet \left(\frac{\text{gpm}^{1.85}}{D^{4.8655}} \right)$$

$$\text{Minor Loss} = \sum k \bullet \frac{v^2}{2g}$$

$$\text{Pump Head Loss} = \frac{HP \bullet 550 \bullet E}{Q \bullet \gamma}$$

Then based on the Bernoulli equation, the total pressure loss and velocity head can be computed with the following equation:

$$\frac{P_1}{\gamma} + z_1 + \frac{v_1^2}{2g} - h_f - h_m + h_p = \frac{P_2}{\gamma} + z_2 + \frac{v_2^2}{2g}$$

Table 1 shows the results of several scenarios based on pump sizing (horsepower, HP) and flowrate.

Table 1 Table of Exit Velocity Based on Flow Rate

Scenario	Flowrate (gpm)	Pump (HP)	Pump Name	Pipe Length (ft)	Pipe Diameter (in)	Effluent Velocity (ft/s)
1	11,600	460	CD500M C15	121.00	24	38.61
				633.00	18	
				940.00	14	
2	8,000	275	CD400M	209.50	18	75.77
				816.00	18	
3	4,800	275	CD300M	209.50	12	96.45
				816.00	12	
4	2,880	147	CD250M	209.50	10	91.65
				816.00	10	
5	2,880	300	HL225M	209.50	10	49.09
				816.00	8	
6	4,560	440	HL250M	209.50	12	121.67
				816.00	10	
7	4,000	151	DPC300	209.50	12	78.68
				816.00	12	

5. Mixing Zone Model

Tetra Tech revisited the mixing zone analysis performed previously (Tetra Tech 2010) based on new information such as the 2011 bathymetry and diffuser recommendations from Dr. Speece and ECO2.

5.1 MACTEC Summary

The MACTEC ReOx report was reviewed and summarized for use in the Back River design. The demonstration project consisted of two custom-built, 12-foot diameter ECO2 Speece cones with river water supplied by four 400-horsepower water intake pumps mounted on a 110-foot barge. The barge was temporarily moored at The Industrial Company (TIC) waterfront property on Hutchinson Island (river mile 14.1). The nominal water-flow capacity for the pump configuration was about 15,000 gallons per minute (gpm) at a hydraulic head of 150 feet (in the center of the cones). The overall transfer efficiency was 85 percent for the temporary demonstration system with some loss during tank filling. The average amount of oxygen added to the river was about 27,000 pounds per day (ppd). The oxygen concentration delivered from the cones to the river ranged from about 120 to 180 milligrams per liter (mg/L).

The Speece cones that were used were each capable of injecting up to 15,000 ppd of oxygen. This superoxygenated flow from the Speece cones was piped directly back to the river and discharged at a depth of about 30 feet where it was dispersed in the river by tidal action without benefit of a diffuser. Some effervescence of oxygen was evidenced at the water surface in the form of rising fine bubbles.

Maintenance was performed on the pumps approximately every 250 hours of operation. The pumps were manufactured by Godwin Pumps and were electrical.

5.2 Mixing Zone Results

The Visual Plumes model was used again based on information from ECO2 and the head loss calculations described in the previous section. The ambient data were received from EFDC simulation results on the Back River at the discharge location during the summer of 1997.

For the design information, the following were used:

- Diffuser = 4 in. diameter
- Quantity = 8 diffusers
- Spacing = 1 port every 100 feet = 700 feet of pipe
- DO Input from cone = 40 mg/L
- Pump = 460HP Godwin CD500M C15
- 80% Efficiency output = 11,600 gpm (approx.)

After determining the effluent flow and velocity, the pipe diameter and depth, the DO concentration, and the number of ports, the mixing zone analysis could begin. The ports are spaced 100 feet apart along the 845.75 foot pipe starting at the 145.75 foot mark, each pointed 90 degrees up toward the river's surface. After producing multiple runs through Visual Plumes, the scenario with the best dilution rate was chosen. Once the water exits the diffuser, the concentration dilutes to around 7 mg/L before reaching the surface. Using data from Visual Plumes, an image could be generated through Tecplot to give a small demonstration as to what the effluent would look like in the river. Figure 18 shows the results from the Visual Plumes model.

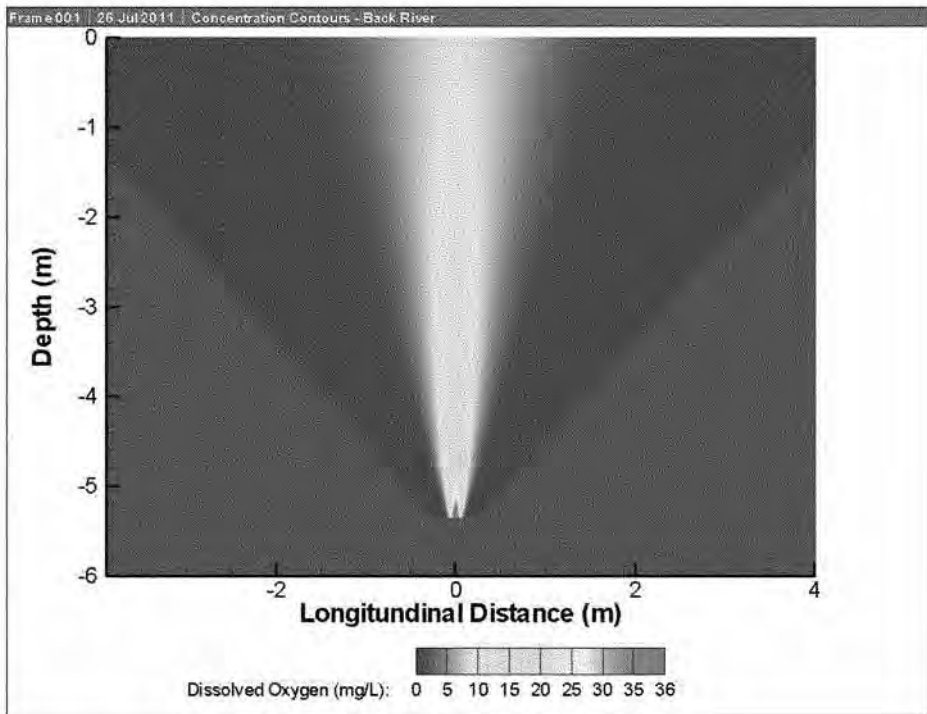


Figure 18 Mixing Zone results from Visual Plumes

6. Summary and Conclusions

The technology of the Speece cones will work at the Back River location. ECO2 performed an analysis based on percent saturation, discharge depth, and effluent pressure. The analysis proved that discharging 40 mg/L at a depth of 15 feet results in 77% saturation of D.O. This is under 100% and much lower than the minimum of 170% saturation needed for effervescence. The Speece cone can be successfully operated to discharge into shallow waters. Multiple examples were provided of successful Speece cone technology applications in waters that are 8 to 9 feet in depth. The Speece cone can be operated to discharge a D.O. level which is at the D.O. saturation level of the shallow water whereby precluding the potential for effervescence. Effervescent loss of D.O. is not even possible. An explanation of why effervescence occurred in the 2007 demonstration project was provided based on operation of the cones.


Aquaculture installations successfully discharge superoxygenated water at 29°C and having a D.O. of 117 mg/L into 8 ft deep tanks and observe no effervescent loss of D.O. because of the rapid dilution achieved with the ambient D.O. water in the tank. Also, this analysis demonstrated the D.O. concentrations do not accumulate to unhealthy (toxic) levels during high or low slack tides in the Back River.

A detailed bathymetry of the Back River was conducted by the Savannah District and shown in this report. The discharge depth in the vicinity of the Back River injection is approximately 15 feet. The Tetra Tech mixing zone analysis showed the pressure head calculations and mixing zone determination was sufficient to discharge the poundage required. With a reasonable number of ports and the exit velocity, the oxygen plume is readily mixed due to advection and dispersion in the Back River.

7. References

- Jones and Stokes, 2004: "Final Aeration Technology Feasibility Report for the San Joaquin River Deep Water Ship Channel" Final Report, October 2004.
- MACTEC, 2008: Savannah Harbor Reoxygenation Demonstration Project, Savannah, Georgia. Prepared for the Georgia Ports Authority, January 8, 2008.
- Speece, R.E., 2004: The Role Of Superoxygenation In Achieving TMDL Requirements, R. E. Speece, Ph.D., Centennial Professor Emeritus of Civil and Environmental Engineering Vanderbilt University, Nashville, TN and Board Member of ECO2, Indianapolis, Indiana.
- Tetra Tech, 2010 "Oxygen Injection Design Report, Savannah Harbor Expansion Project, Savannah, Georgia" Final Report, October 15, 2010.
- Tetra Tech, 2008: Final Report, Design of Dissolved Oxygen Improvement Systems in Savannah Harbor, Atlanta, Georgia.
- Tetra Tech, 2009: Modeling of GPA's Oxygen Injection Demonstration Project Savannah Harbor, Georgia. Atlanta, Georgia.

Appendix A – Diffuser Options

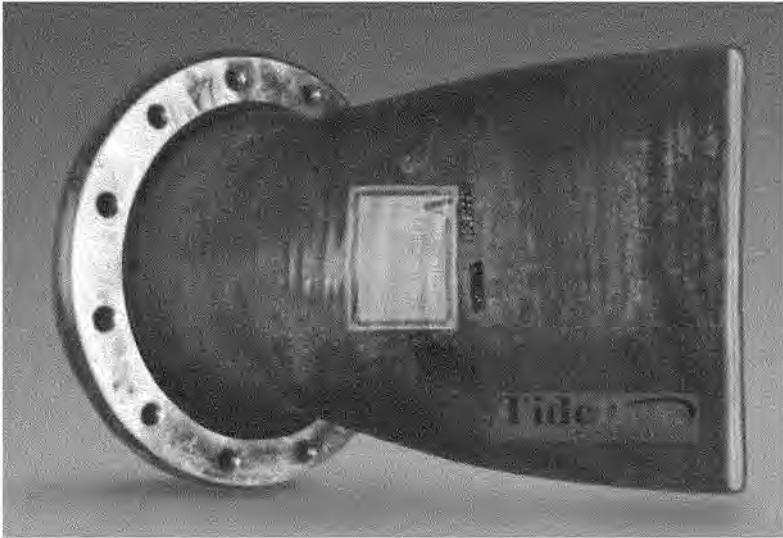

Type: Tide Flex Diffuser (TFD's)

Company: Tide Flex Technologies (<http://www.tideflex.com/tf/index.php/>)

Analysis

- Extremely versatile – easily retrofitted to fit any pipe size you give
- Prevents backflow into the system
- **More even flow distribution among mutli ports**
- **Significantly improved salt water purging characteristics**
- **Lower headloss at peak flow increases flow capacity**
- **Higher jet velocity at low flows improves initial dilution**
- **Less variability in jet velocity and headloss thru range of flows**
- **30 year operation life**

Disadvantages



- Data and calculations are produced directly by the company
- Unknown cost

Other info

<http://www.scribd.com/doc/30924376/MeasurIT-Tideflex-Effluent-Diffuser-Systems-0910>

<http://www.aeiltada.com.co/descargas/Red%20Valve/Tideflex-Check-Valve-brochure.pdf>

http://www.sgm-inc.com/fileadmin/sgm/home/happenings/2009_Effluent_Diffusers.pdf

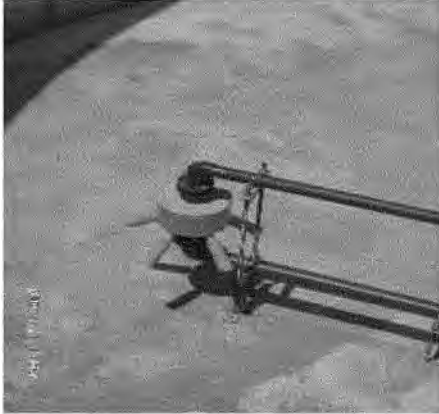

Type: SBR-Plants (Sequenced Batch Reactor) Körtting Ejectors

Company: KörttingHannover AG (http://www.koerting.de/index.html?set_language=en&cl=en)

Analysis:

- Creates a more direct stream of flow
- Multiple nozzles can be attached to one fitting
- Low cost
- Water jet
- No sealing problems
- This nozzle provides pre-mixing before the DO would even enter the channel

Other info

<http://www.koerting.de/dateien/strahlpumpen/watertreatment.pdf>



Bailey, William G SAS

From: Bailey, William G SAS
nt: Monday, August 01, 2011 11:34 AM
nt: 'Beckham, J. Christopher'
Cc: 'Wade Cantrell'; Okane, Jason D SAS; McIntosh, Margaret (Mackie) SAS; Hoke, Joseph T SAS
Subject: Savannah Harbor Expansion Project -- Comparison of Sigma and Z-grid EFDC models (UNCLASSIFIED)
Attachments: FINAL Report - SHEP Model Comparison July 29, 2011.pdf


Classification: UNCLASSIFIED
 Caveats: NONE

SC DHEC had requested we compare the hydrodynamic and water quality models that the Corps used in the impact evaluation for this project with a version of those models that EPA subsequently developed. We consulted with Wade to better understand the Department's concerns prior to initiating the work.

Our contractor has completed the work and we provide the attached report for your review. We believe it fully addresses your concerns about this issue.

Bill Bailey

Classification: UNCLASSIFIED
 Caveats: NONE

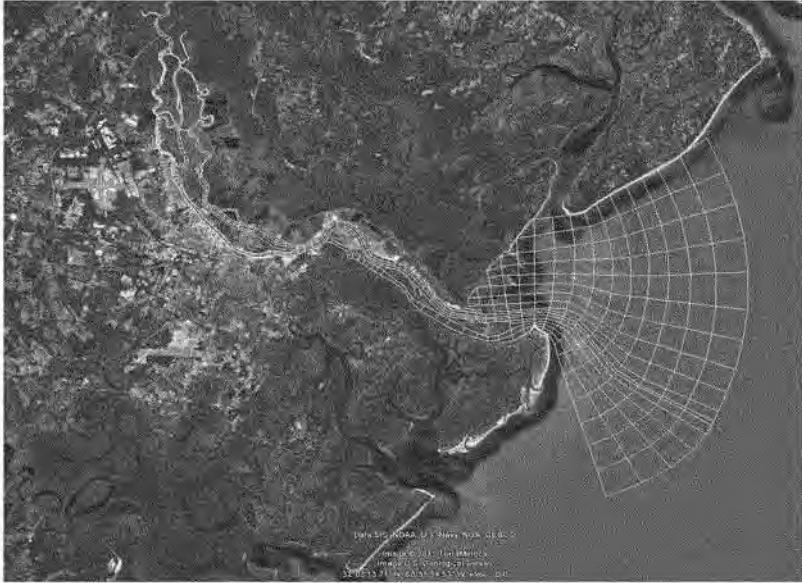

**US Army Corps
of Engineers**

July 29, 2011

Acknowledgements

Mr. Joe Hoke contributed to this report and coordinated efforts with the contractor team and the Savannah District. Mr. Wade Cantrell from the South Carolina Department of Health and Environmental Control (DHEC) assisted in the scope of this work. Mr. Steven Davie was the project manager from Tetra Tech and was supported by Mr. Jim Greenfield, Dr. Hugo Rodriguez, and Dr. Yuri Plis. Mr. Phillip Todd was the project manager for SEPI.

TABLE OF CONTENTS

1.0	INTRODUCTION.....	2
2.0	TECHNICAL APPROACH.....	2
2.1	Sigma Grid EFDC Application to the Savannah River Estuary.....	3
2.2	EPA Z-Grid Model Application to the Savannah River Estuary.....	5
3.0	MITIGATION PLANS FOR SALINITY AND WETLANDS	7
4.0	SALINITY COMPARISONS AT HOULIHAN BRIDGE FOR FRONT, MIDDLE AND BACK RIVERS.	9
4.1	Salinity Comparisons under Existing Conditions.....	9
4.2	Velocity Comparisons at Houlihan Bridge for Front, Middle and Back Rivers.	12
4.3	Salinity Comparisons under Plan6A Deepening Scenario.....	14
4.2	Velocity Comparisons at Houlihan Bridge for Front, Middle and Back Rivers under Plan6A.....	17
5.0	LOCATION OF THE 0.5 PPT SURFACE SALINITY AT THE 50% EXCEEDANCE VALUE.....	21
5.1	Front River Surface Salinity 0.5 ppt 50% Exceedance Values.....	25
5.2	Middle River Surface Salinity 0.5 ppt 50% Exceedance Values	25
5.3	Back River Surface Salinity 0.5 ppt 50% Exceedance Values	25
6.0	DISSOLVED OXYGEN COMPARISON BETWEEN SIGMA GRID AND Z-GRID.....	26
7.0	CONCLUSIONS.....	26
8.0	REFERENCES.....	27

1.0 INTRODUCTION

The United States Army Corps of Engineers (USACE), Savannah District is working with the Georgia Ports Authority (GPA) to evaluate the deepening of the navigation channel in Savannah Harbor. This effort is called the Savannah Harbor Expansion Project (SHEP). The project is intended to identify the impacts and mitigation strategies of deepening the harbor from its presently authorized 42-foot depth Mean Lower Low Water (MLLW), up to a depth of 48-feet MLLW.

Hydrodynamic and water quality models were developed and determined to be acceptable in March 2006 by the United States Environmental Protection Agency (USEPA), United States Fish and Wildlife Services (USFWS), Georgia Environmental Protection Division (GAEPD), and South Carolina Department of Health and Environmental Control (SCDHEC) to identify dissolved oxygen levels throughout Savannah Harbor. This set of models are called the Sigma Model. During 2007, EPA Region 4 determined a need to convert the sigma grid of the enhanced model to a Z-Grid, which was later updated with new Middle River and Back River bathymetry and recalibrated to 2009 USGS velocity and flow data. The Z-Grid model was further enhanced to be used for the Savannah harbor Chloride analysis.

It should be noted that the Sigma and Zgrid models were calibrated for different purposes. The Sigma model was calibrated on 1997 and 1999 data and was designed for SHEP impact use in a way that state and federal agencies and peer reviews deemed appropriate. The Zgrid model was refined to better handle the EPA, Georgia and South Carolina TMDL development needs and the Corp's chlorides analysis for the Upper Savannah River portion of the model. The Z-Grid model was based on the Sigma Model and then updated with 2009 USGS data. This report does not develop any conclusions about one model being better than the other but is just to illustrate the differences. However it should be noted that even though the models were developed about 10 years apart the results are remarkably similar.

The basic tasks included in this *Model Comparison Report* are as follows:

- Comparison of Z-Grid Model and Sigma Models' salinity and velocities at Houlihan Bridge
- Comparison of Z-Grid Model and Sigma Model Predictions of the Surface Salinities at the 0.5 ppt 30% Exceedance Levels
- Estimation of wetland impacts due to Harbor Deepening using the Z-Grid Model results

2.0 TECHNICAL APPROACH

This Scope is to compare the Corp's Savannah Harbor Hydrodynamic and Water Quality Models (Sigma Grid) with EPA's updated TMDL Hydrodynamic and Water Quality Models (Zgrid Grid) under baseline 1997 conditions. Both sets of models use the same hydrodynamic model linked to a water quality model. The hydrodynamic model used is the Environmental Fluid Dynamics Code (EFDC) developed and maintained by Tetra Tech (Hamrick 1992). The water quality model used is the Water Quality Analysis Simulation Program (WASP) maintained by EPA.

The Z-Grid model builds on the original harbor model. During 2007, EPA Region 4 determined a need to convert the sigma grid of the enhanced model to a Z-Grid. Hundreds of Savannah Harbor TMDL modeling runs were going to be necessary over a multiyear time period and the Sigma Grid WASP model took a day to run one year. So EPA changed to the Zgrid model which ran one year of water quality in a couple of hours. The initial grid model predictions were very similar to the Sigma model, the major changes in the Zgrid model occurred when EPA recalibrated the Middle and Back River based on new bathymetry, velocity and flow data collected by USGS in 2009.

The Z-Grid allows for varying number of vertical layers throughout the model domain. The Sigma Grid has six vertical layers with widely varying layer depths, the Z-Grid model was converted to five vertical layers in the navigation channel and one vertical layer in the Middle, Back, Little Back, and Upper Savannah Rivers allowed all the layers to be similar depths. The Z-Grid allowed for the invert of the river bottom elevation to be modified with one vertical layer going upstream from the I-95 Bridge to the Clio USGS gage on the Savannah River. A more detailed description of the Z-Grid model is explained in a later section of this report.

The EPA Z-Grid model was updated by Tetra Tech in 2010 for use in the Corp's Chloride modeling analysis. The updates included expanding the Upper Savannah River portion of the model to include Abercom Creek tributary. This is the Z-Grid model used for the following model comparisons.

The EFDC model is part of the USEPA TMDL Modeling Toolbox due to its application in many TMDL-type projects. As such, the code has been peer reviewed and tested and has been freely distributed for public use. EFDC was developed by Dr. John Hamrick and is currently supported by Tetra Tech for USEPA Office of Research and Development (ORD), USEPA Region 4, and USEPA Headquarters. EFDC has proven to capture the complex hydrodynamics in systems similar to that of Savannah Harbor. The EFDC hydrodynamic and sediment transport model linked with the WASP water quality model provides the most appropriate combination of features necessary for this study. EFDC is a multifunctional, surface-water modeling system, which includes hydrodynamic, sediment-contaminant, and eutrophication components. The EFDC model is capable of 1, 2, and 3-D spatial resolution. The model employs a curvilinear-orthogonal horizontal grid and a sigma, or terrain following, vertical grid. The EFDC model's hydrodynamic component employs a semi-implicit, conservative finite volume-finite difference solution scheme for the hydrostatic primitive equations with either two or three-level time stepping (Hamrick 1992).

The EFDC hydrodynamic model can run independently of a water quality model. For this Savannah Harbor application the EFDC model simulates the hydrodynamic and constituent (salinity and temperature) transport and then writes a hydrodynamic linkage file for the water quality model WASP7 code.

WASP7 is a version of WASP with many upgrades to the user's interface and the model's capabilities. The major upgrades to WASP have been the addition of multiple BOD components, addition of sediment diagenesis routines, and addition of periphyton routines. WASP is an enhanced Windows version of the USEPA Water Quality Analysis Simulation Program (WASP), nonetheless, uses the same algorithms to solve water quality problems as those used in the DOS version. WASP is a dynamic compartment-modeling program for aquatic systems, including both the water column and the underlying benthos. The time-varying processes of advection, dispersion, point and diffuse mass loading and boundary exchange are represented in the basic program.

2.1 Sigma Grid EFDC Application to the Savannah River Estuary

The Sigma Grid EFDC model was calibrated with seven years of data – from January 1, 1997 through December 31, 2003. The model grid, which includes 931 horizontal cells, extends upstream to Clio, Georgia (~ 61 miles from Fort Pulaski) and downstream to the Atlantic Ocean (~17 miles offshore from Fort Pulaski). The model also includes marsh cells, to simulate the extensive intra-tidal marsh areas in the system, increasing the number of total cells to 947. The man-made connections affecting the system were included in the model. These included McCoy Cut, Rifle Cut, Drake's Cut, New Cut as closed, and the sill of the Tide Gate.

Figure 2-1 shows the modeling grid. The Savannah Harbor EFDC model was calibrated with graphical time series comparisons (qualitative) and statistical calculations (quantitative). The statistical calculations

included percentiles at 5% intervals. It included: water surface elevation, currents, flow, temperature, and salinity.

The calibration objectives for the hydrodynamic model were to appropriately represent the transport processes by propagating momentum and energy through the system based upon freshwater inflow from the Savannah River and tidal energy from the Atlantic Ocean. Since vertical stratification plays a major role in the water quality of the lower harbor area, it was imperative to capture the effect of tides and fresh water flows on salinity and temperature over the appropriate spatial and temporal scales. The primary objective was to simulate the salinity and temperature stratification events and to demonstrate that the duration and magnitude of the events were appropriately represented in the model. The calibration period was the summer of 1999. The confirmation period was the summer of 1997. Long-term United States Geological Survey (USGS) data was also used for confirmation. The two summer periods were both low-flow conditions with several spring/neap tide events occurring throughout the period.

The model calibration and validation results are presented in the report "Development of the Hydrodynamic and Water Quality Models for the Savannah Harbor Expansion Project", of January of 2006, prepared by Tetra Tech, Inc. for the Savannah District of USACE.

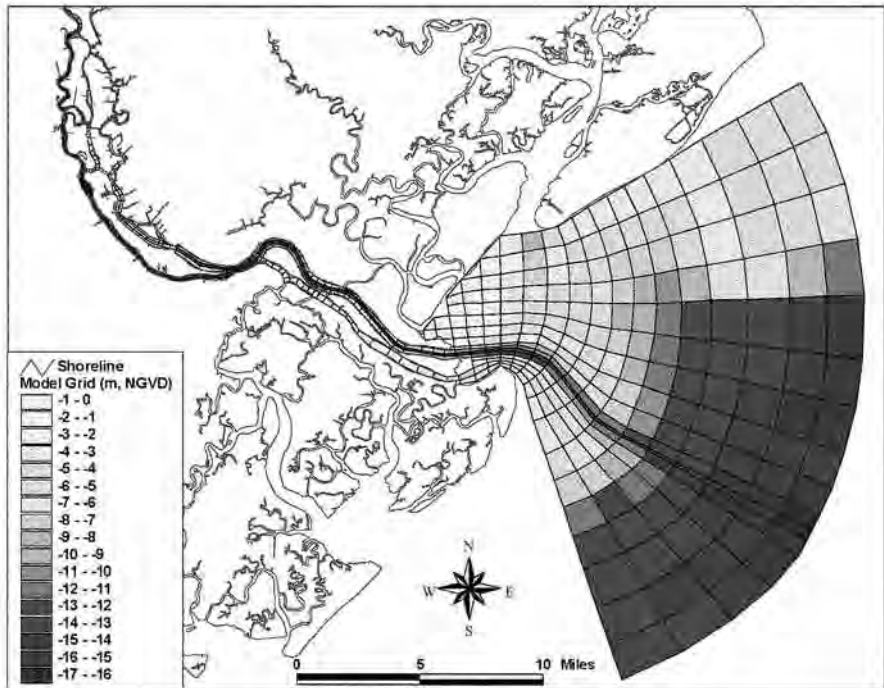


Figure 2-1 EFDC Sigma Grid

2.2 EPA Z-Grid Model Application to the Savannah River Estuary

The Z-Grid model builds on the original harbor model developed for EPA Region 4 during the development of the Total Maximum Daily Load in 2004-2005 and the enhanced model for the United States Army Corps of Engineers (USACE) finalized on January 30, 2006 (Tetra Tech 2006). During 2007, EPA Region 4 determined a need to convert the sigma grid of the enhanced model to a Z-Grid. The Z-Grid allows for varying number of vertical layers throughout the model domain. The sigma grid is six vertical layers with widely varying layer depths, while the Z-Grid has five vertical layers in the navigation channel and one vertical layer in the Middle, Back, Little Back, and Upper Savannah Rivers which allowed all the layers to be similar depths. The Z-Grid allowed for the invert of the river bottom elevation to be modified with one vertical layer going upstream from the I-95 Bridge to the Clio USGS gage on the Savannah River. The longitudinal slope was evenly distributed from the headwater cell to above the I-95 Bridge by adjusting bottom elevations. The water surface elevation at the headwater boundary cell was raised to better match the gage height reported at the Clio USGS gage. In addition to the Z-Grid conversion, the watershed tributary flows and marsh areas were revised.

The Z-Grid model, Figure 2-2, contains 608 horizontal cells and 1,778 total cells when including the vertical cells. The original flow, velocity, elevation and temperature predictions were calculated using the EFDC hydrodynamic model and calibrated to the extensive 1997 and 1999 data set (Tetra Tech 2006). The EFDC model inputs were updated to reflect more recent information. This information includes new flow gages by USGS in the harbor, long-term DO data at the USACE Dock, updates to the boundary conditions, connection to EPD's river model, and updates to water quality kinetics.

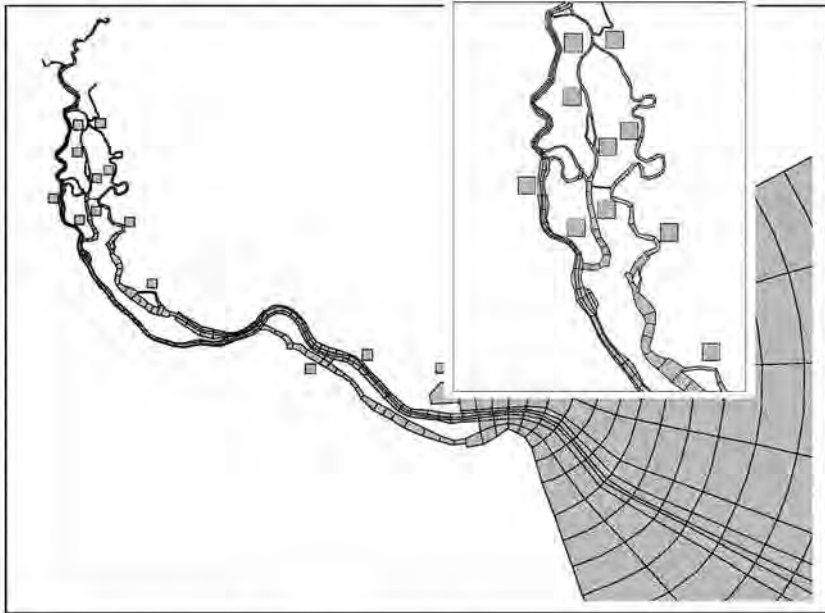


Figure 2-2 Savannah Harbor Z-Grid Model (marsh cells shown for representation)

The USGS collected detailed (15 minute) water surface elevation, velocity and flow data during the fall and winter of 2008 – 2009 at the Middle and Back Rivers near the Houlihan Bridge crossings at Stations MR-10 and LBR-15, respectively. These data were used to improve the hydrodynamic predictive ability of the model in the Middle and Back Rivers. The updates focused on improving the width and depths of the river channels in the model and changing the marsh storage areas to better reflect the movement of water through the channels so the model would better reflect the measured flows, velocities and elevations. (2010 EPA Region 4) Figure 2-3 and Figure 2-4 illustrate an example of the models predictive capabilities for gage height and flows for Little Back River at Houlihan Bridge.

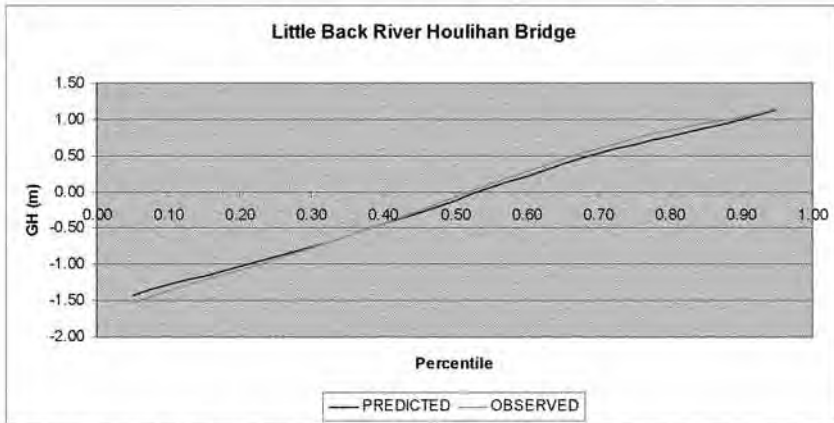


Figure 2-3 Percentile Comparison of Predicted and Measured Gage Heights

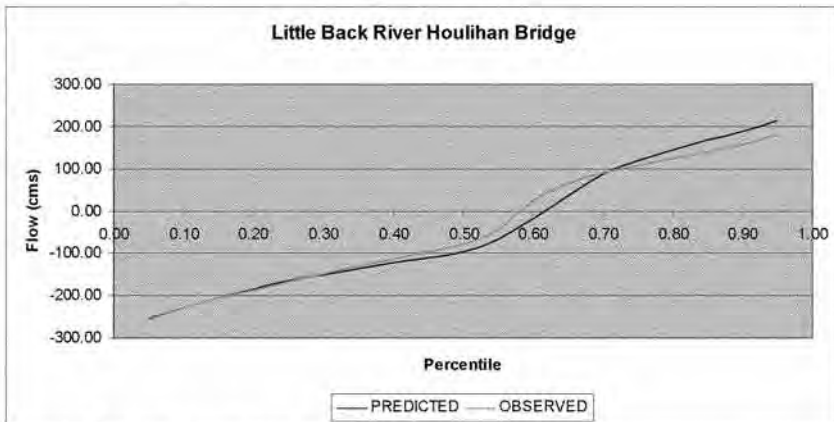


Figure 2-4 Percentile Comparison of Predicted and Measured Flows

Georgia EPD has developed a hydrodynamic and water quality model (EPDRiv 1 Model) for the Savannah River from the Augusta Canal diversion dam to the USGS stage recorder (02198760) near

Hardeeville, South Carolina. This model was used to transport the oxygen demanding substances from the upper watershed to the Harbor Model. This provided a seamless connection between the Savannah River Model and the Savannah Harbor Model. The Sigma model and the original (pre 2009) Zgrid model used USGS Clio gage flow and water quality data for the Savannah River input boundary.

The Z-Grid model, as used for TMDL development, was reviewed extensively by an EPA, States and Dischargers' Technical Advisory Group. This group of technical experts w from or represented the Savannah Harbor Committee, Central Savannah River Area TMDL Group, USEPA, Georgia EPD and South Carolina DHEC. The Technical Advisory Groups conclusion was the River and Harbor Models as refined during 2009 subgroup work effort provide sufficient tools to develop a revised Savannah Harbor TMDL.

Tetra Tech used the Z-Grid model for the 2010 chloride analysis in support of SHEP. The Z-Grid model was used because of the improved flow calibration in the upper part of the system. The Abercorn Creek, including Big Collis, Little Collis, and Bear Creeks, was added to the model domain by adding grid cells and measured depths for the bathymetry. The model was calibrated to a longterm chloride dataset at the City's intake and further validated with flow and salinity data in the harbor through 2009. The Z-Grid model was reviewed through Agency Technical Review (ATR) by Mr. John Hazelton (USACE Wilmington District) in November 2010 and Independent External Peer Review (IEPR) by Battelle Memorial Institute in February 2011.

3.0 MITIGATION PLANS FOR SALINITY AND WETLANDS

The USACE Savannah District used the EFDC (Sigma grid) to determine the appropriate measures to mitigate for salinity and wetland impacts. Plan 6A includes the following flow-altering mitigation features: McCoy Cut diversion structure; channel enlargement on McCoy Cut, and upper Middle and Little Back Rivers; submerged sill and broad berm at the mouth of Back River, closure at Rifle Cut and lower arm at McCoy Cut; and removal of the tide gate abutments and piers. These features act together to increase freshwater flows through Middle, Little Back and Back River while maintaining tidal flow access to mitigate for salinity intrusion from the deepened navigation channel.

Figure 3-1 was provided by the USACE Savannah District and depict the different features for Plan 6A.

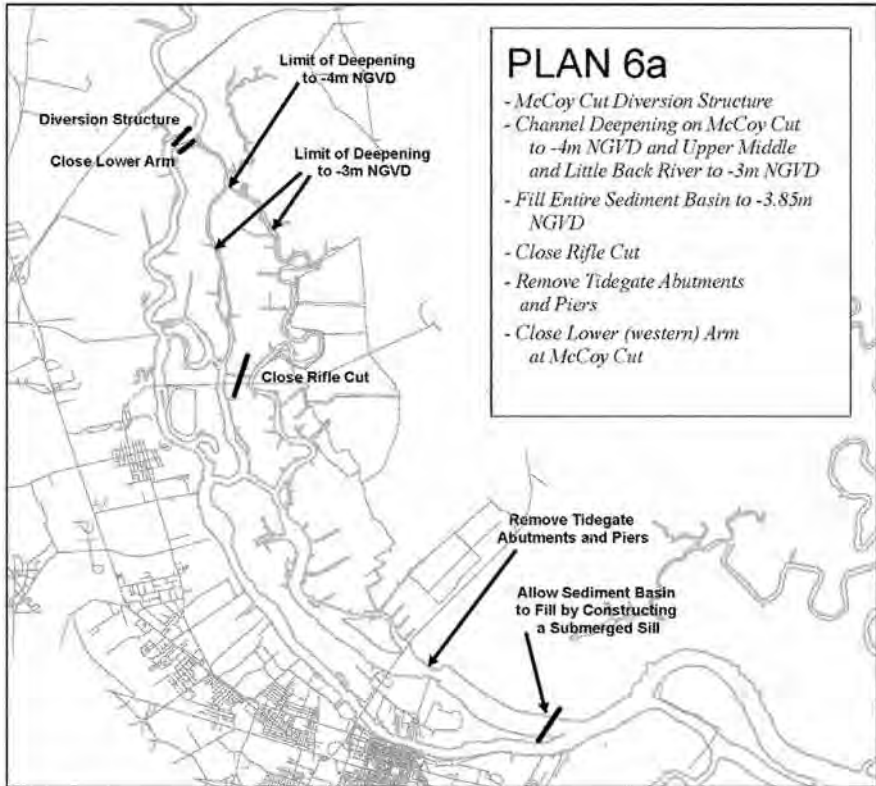


Figure 3-1 Mitigation Plan 6A (courtesy of the USACE Savannah District)

4.0 SALINITY COMPARISONS AT HOULIHAN BRIDGE FOR FRONT, MIDDLE AND BACK RIVERS.

The location where Houlihan Bridge crosses the Front, Middle and Back Rivers was selected for Salinity Comparisons between the Sigma Grid and Z-Grid Models.

4.1 Salinity Comparisons under Existing Conditions

Tables 4-1 to 4-3 and Figures 4-2 to 4-4 show the differences in salinity predictions for Front, Middle and Back Rivers. The Z-Grid model predicts salinity moving upstream slightly farther than the Sigma Grid model.

Table 4-1 Front River Salinity Comparisons

Front River Z-Grid - Sigma Grid 1997 Model Comparisons			
Salinity (ppt)			
Percentiles	10th	50th	90th
Sigma Grid	0.0	0.2	2.8
Z-Grid	0.03	0.78	4.0

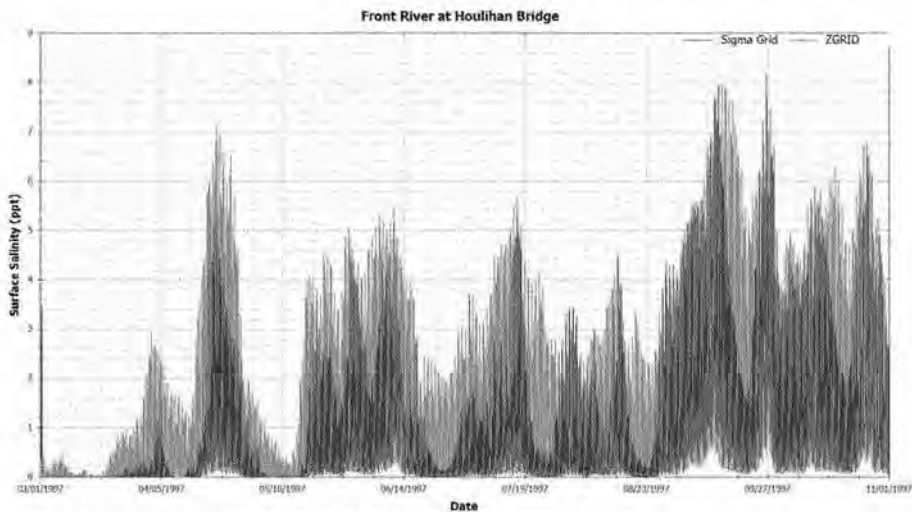


Figure 4-1 Front River Salinity Comparisons

Table 4-2 Middle River Salinity Comparisons

Middle River Z-Grid - Sigma Grid 1997 Model Comparisons			
Salinity (ppt)			
Percentiles	10th	50th	90th
Sigma Grid	0.0	0.37	1.9
Z-Grid	0.19	1.1	3.0

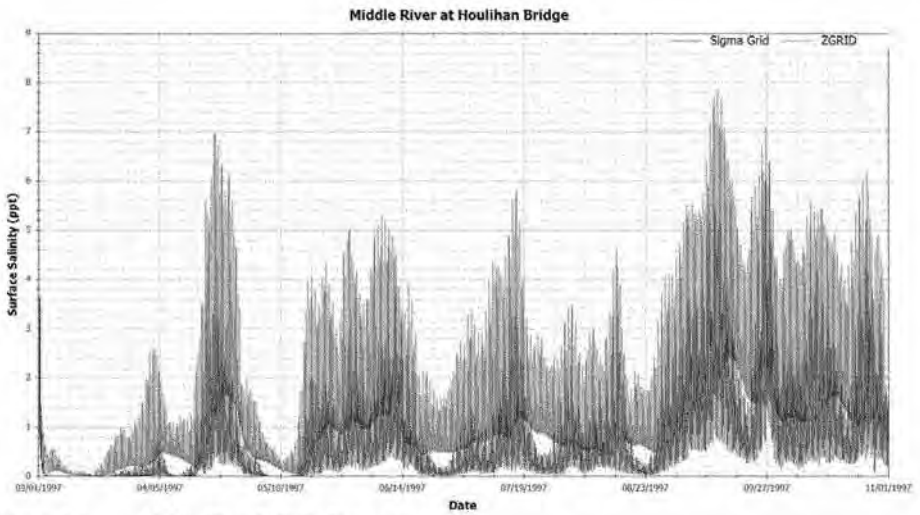


Figure 4-2 Middle River Salinity Comparisons

Table 4-3 Back River Salinity Comparisons			
Back River Z-Grid - Sigma Grid 1997 Model Comparisons			
Salinity (ppt)			
Percentiles	10th	50th	90th
Sigma Grid	0.0	0.15	1.0
Z-Grid	0.02	0.33	1.79

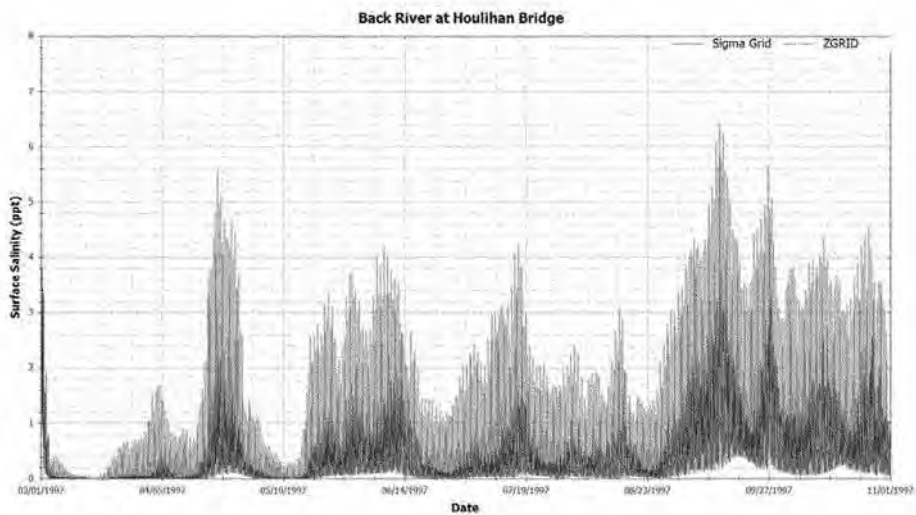


Figure 4-3 Back River Salinity Comparisons

4.2 Velocity Comparisons at Houlihan Bridge for Front, Middle and Back Rivers.

Houlihan Bridge crossings at Front, Middle and Back Rivers are used for Velocity Comparisons between the Sigma Grid and Z-Grid Models. Tables 4-4 to 4-6 and Figures 4-6 to 4-8 illustrate the differences in velocity for Front, Middle and Back Rivers. Overall the Z-Grid Model predicts higher surface velocities both in the upstream (+) and downstream (-) directions with an increase in the average surface velocity in the upstream direction. This corresponds with the increased salinity movement upstream.

Table 4-4 Front River Velocity Comparisons

Front River Z-Grid - Sigma Grid 1997 Model Comparisons			
Average Velocity (cm/sec)			
Percentiles	10th	50th	90th
Sigma Grid	-73	-28	+47
Z-Grid	-99	-40	+97

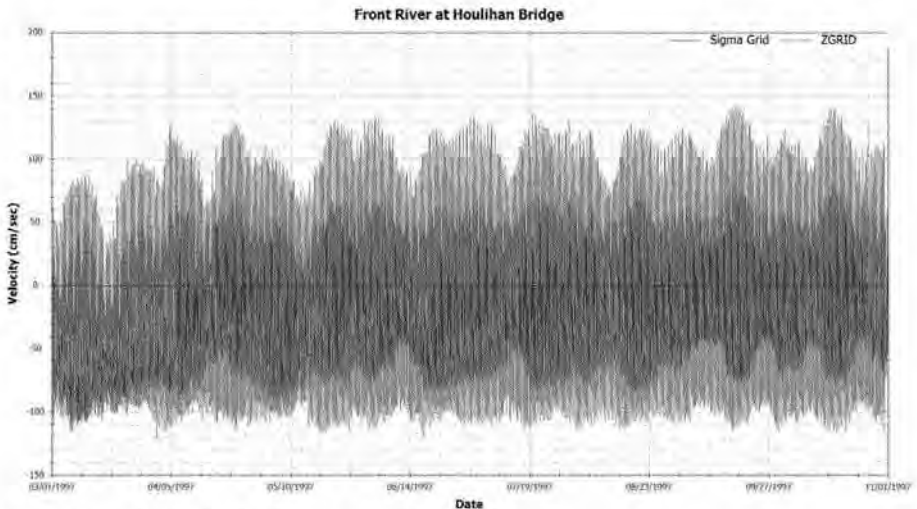


Figure 4-4 Front River Velocity Comparison

Table 4-5 Middle River Model Velocity Comparisons			
Middle River Z-Grid - Sigma Grid 1997 Model Comparisons			
Velocity (cm/sec)			
Percentiles	10th	50th	90th
Sigma Grid	-34	-11	+27
Z-Grid	-48	-22	+46

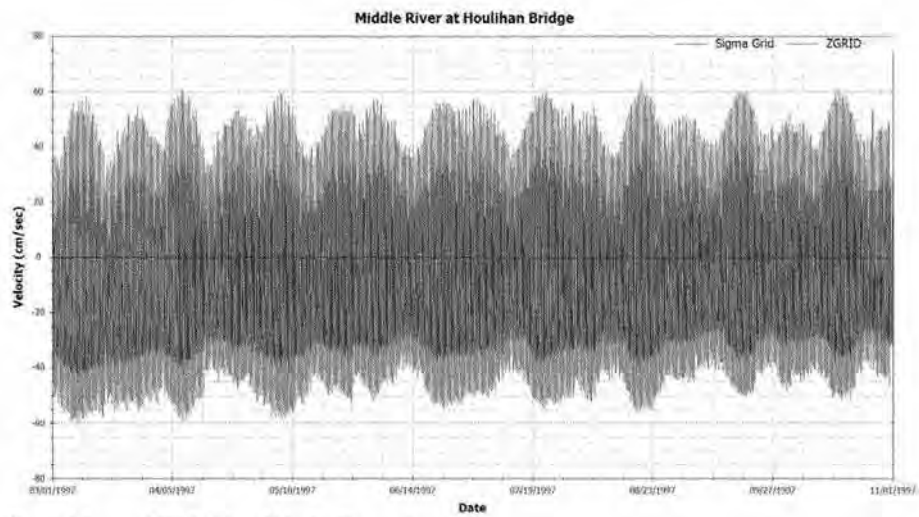


Figure 4-5 Middle River Velocity Comparison

Table 4-6 Back River Velocity Comparisons

Back River Z-Grid - Sigma Grid 1997 Model Comparisons			
Velocity (cm/sec)			
Percentiles	10th	50th	90th
Sigma Grid	-20	-14	+18
Z-Grid	-45	-23	+29

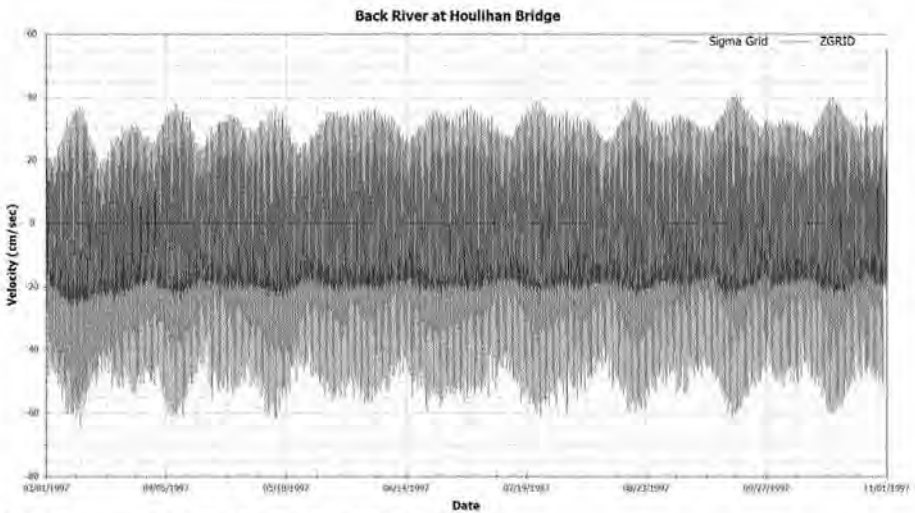


Figure 4-6 Back River Velocity Comparison

4.3 Salinity Comparisons for 48 ft Project Depth with Mitigation Plan 6A

For the Plan6A mitigation scenario, Tables 4-7 to 4-9 and Figures 4-7 to 4-9 show the differences in salinity predictions for Front, Middle and Back Rivers. For the Front and Middle Rivers the Z-Grid model predicts salinity moving upstream slightly farther than the Sigma Grid model, while for the Back River the Z-Grid model predicts salinity moving upstream slightly less than the Sigma Grid model. Also the Z-Grid model show much less tidal variation of salinity, this is due caused by fresh water moving farther down the Back River and the associated marsh areas, damping the impacts of the salinity movement.

Table 4-7 Front River Salinity Comparisons			
Front River Z-Grid - Sigma Grid 1997 Model Comparisons			
Salinity (ppt)			
Percentiles	10th	50th	90th
Sigma Grid	0.0	0.65	3.9
Z-Grid	0.09	1.5	5.3

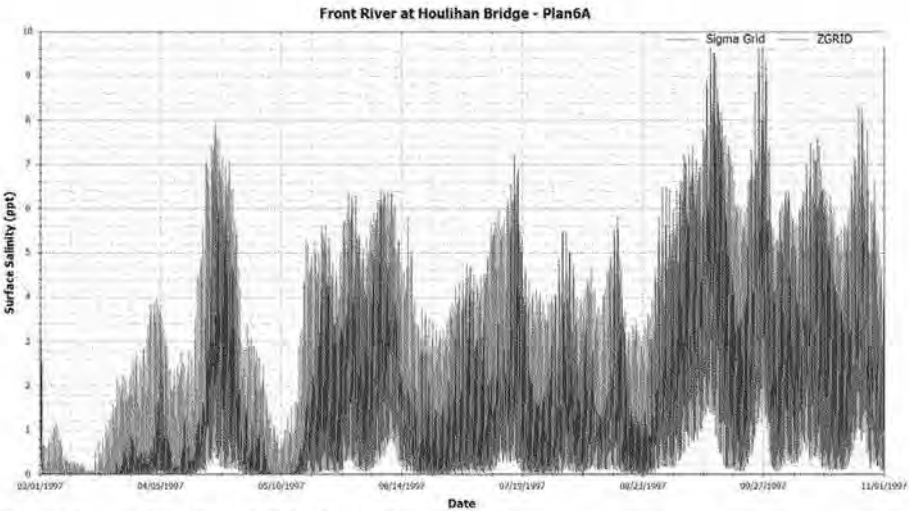


Figure 4-7 Front River Salinity Comparisons – Plan6A

Table 4-8 Middle River Salinity Comparisons

Middle River Z-Grid - Sigma Grid 1997 Model Comparisons			
Salinity (ppt)			
Percentiles	10th	50th	90th
Sigma Grid	0.0	0.04	0.36
Z-Grid	0.32	2.1	4.3

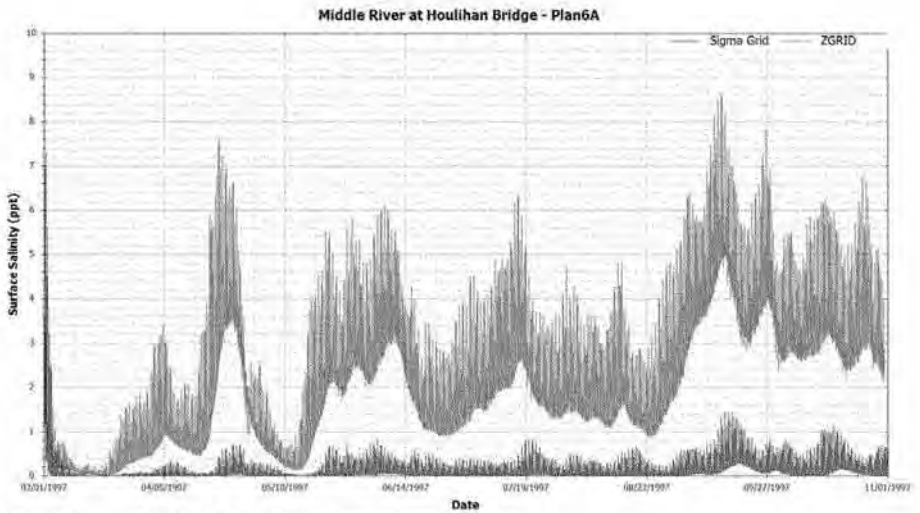


Figure 4-8 Middle River Salinity Comparisons – Plan6A

Table 4-9 Back River Salinity Comparisons

Back River Z-Grid - Sigma Grid 1997 Model Comparisons			
Salinity (ppt)			
Percentiles	10th	50th	90th
Sigma Grid	0.0	0.04	0.36
Z-Grid	0.0	0.03	0.17

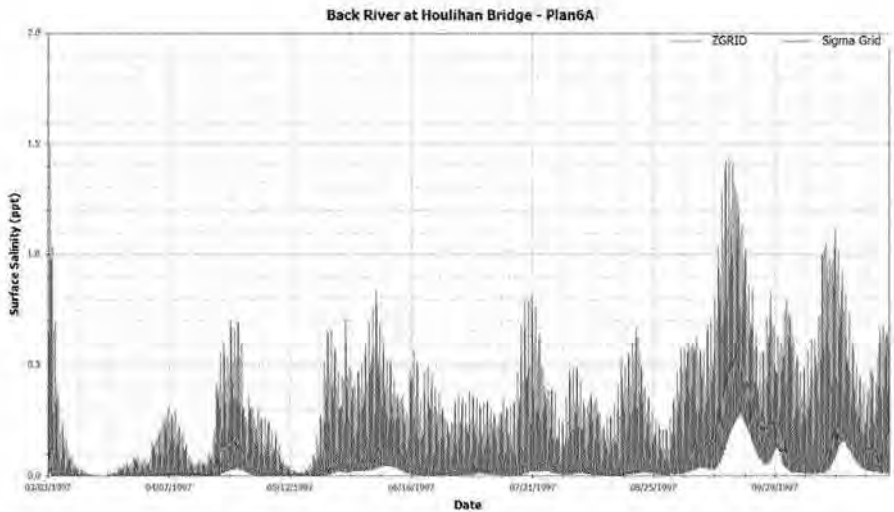


Figure 4-9 Back River Salinity Comparisons – Plan6A

4.2 Velocity Comparisons at Houlihan Bridge for Front, Middle and Back Rivers under Plan6A

Houlihan Bridge crossings at Front, Middle and Back Rivers are used for Velocity Comparisons between the Sigma Grid and Z-Grid Models. Tables 4-10 to 4-12 and Figures 4-10 to 4-12 illustrate the differences in velocity for Front, Middle and Back Rivers. Overall the Z-Grid Model predicts higher surface velocities both in the upstream (+) and downstream (-) directions with an increase in the average surface velocity in the upstream direction. This corresponds with the increased salinity movement upstream.

Table 4-10 Front River Velocity Comparisons

Front River Z-Grid - Sigma Grid 1997 Model Comparisons			
Average Velocity (cm/sec)			
Percentiles	10th	50th	90th
Sigma Grid	-70	-21	+48
Z-Grid	-101	-36	+85

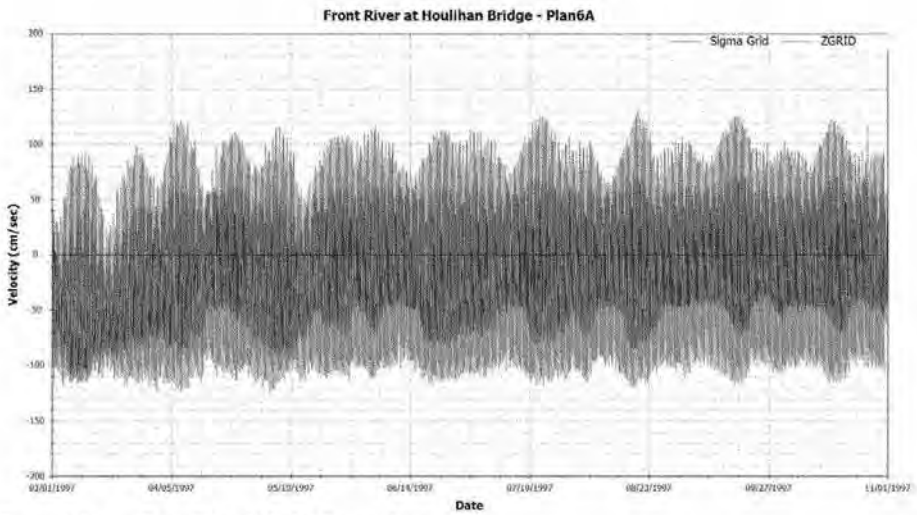


Figure 4-10 Front River Velocity Comparison

Table 4-11 Middle River Model Velocity Comparisons			
Middle River Z-Grid - Sigma Grid 1997 Model Comparisons			
Velocity (cm/sec)			
Percentiles	10th	50th	90th
Sigma Grid	-31	-11	+19
Z-Grid	-41	-21	+37

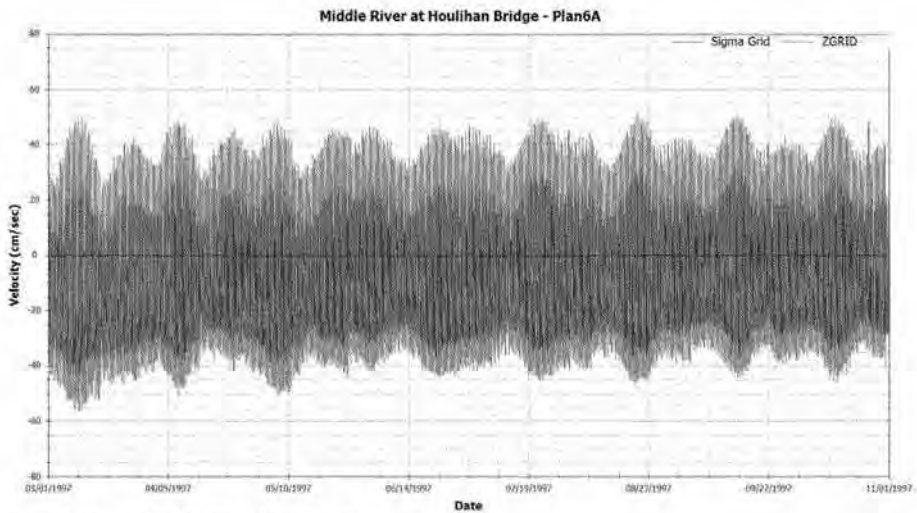


Figure 4-11 Middle River Velocity Comparison

Table 4-12 Back River Velocity Comparisons

Back River Z-Grid - Sigma Grid 1997 Model Comparisons			
Velocity (cm/sec)			
Percentiles	10th	50th	90th
Sigma Grid	-24	-15	+27
Z-Grid	-33	-21	+35

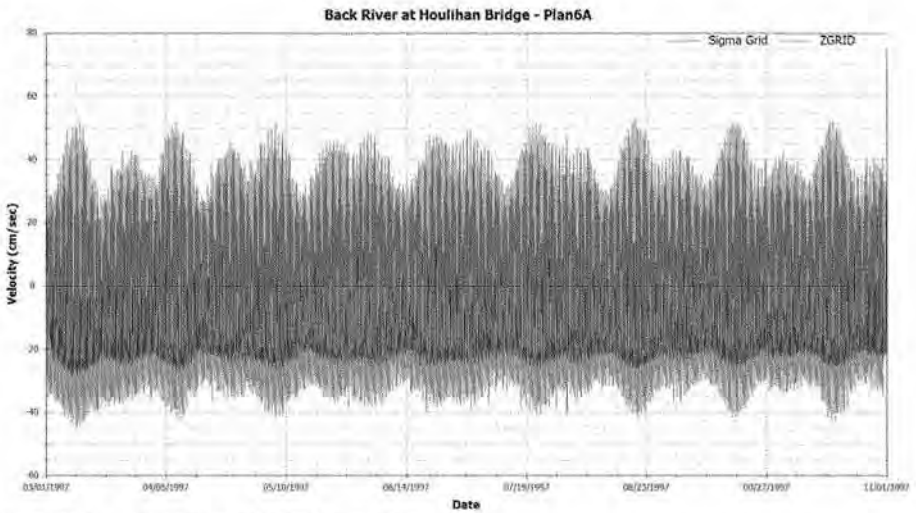


Figure 4-12 Back River Velocity Comparison

5.0 LOCATION OF THE 0.5 PPT SURFACE SALINITY AT THE 50% EXCEEDANCE VALUE

The amount of wetlands impacted was estimated by the Corps using a river salinity of 0.5 ppt at 50th % exceedance value (EV) in the Front, Middle and Back Rivers. Figures 5-1 and 5-2 illustrate the location of the 0.5 ppt 50% EV for Front Middle and Back Rivers and potential wetlands impact using the Sigma Grid. The time period used to determine the 50% EV is March 1 to November 1, 1997 as specified by the Wetland Interagency Coordination Team.

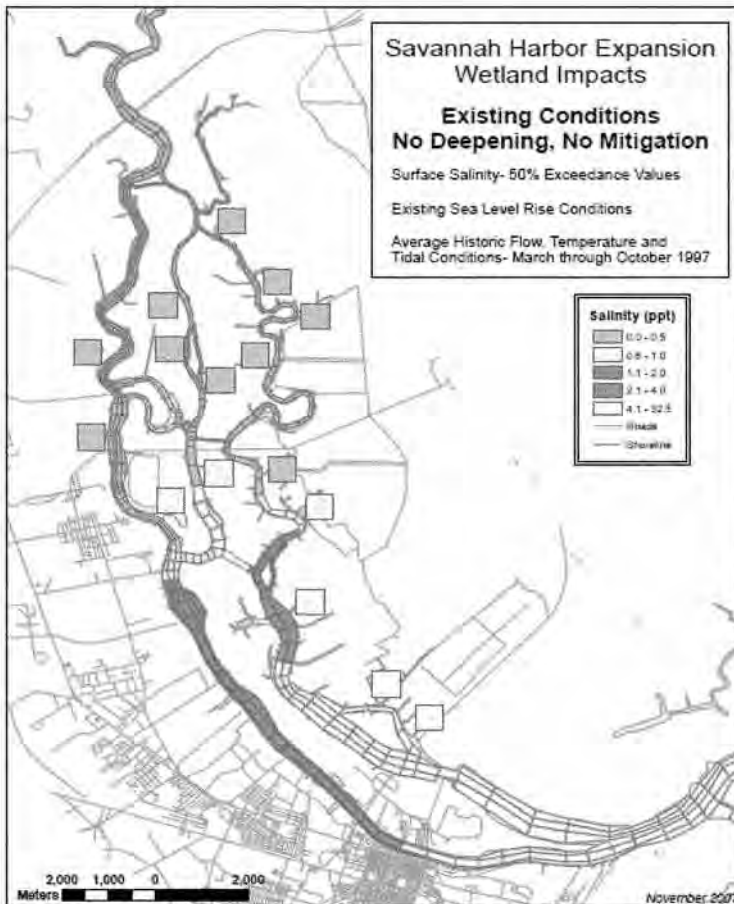


Figure 5-1 Locations of the Surface Salinity 0.5 ppt 50% EV under Existing Conditions
(Courtesy of the USACE Savannah District)

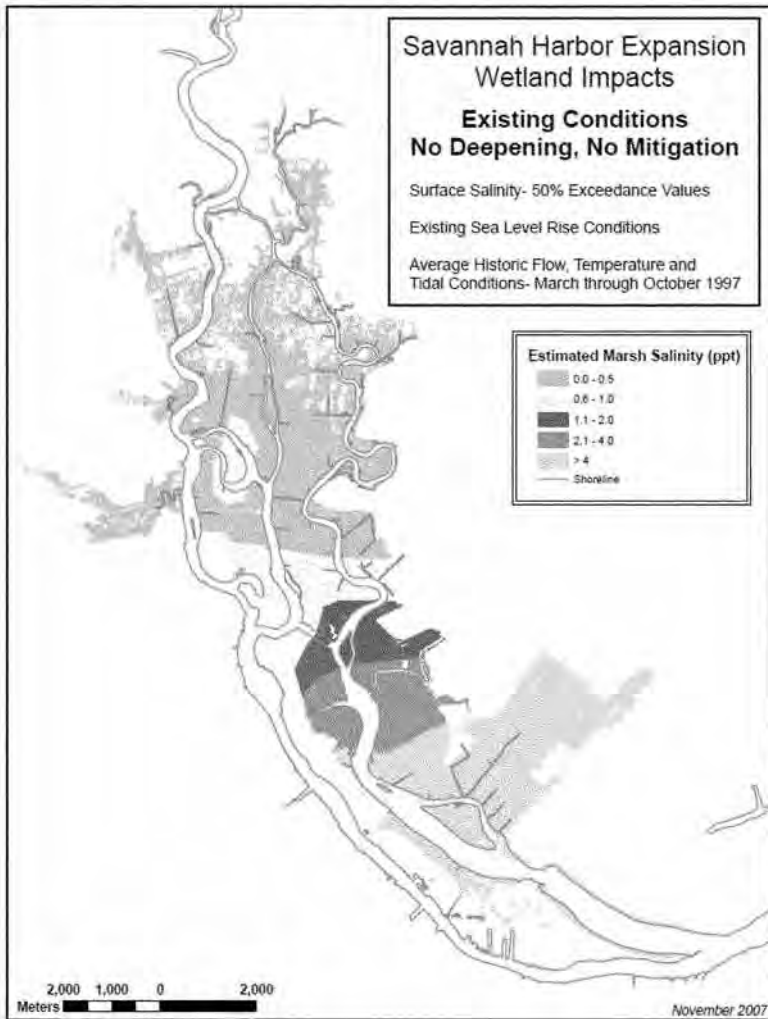


Figure 5-2 Wetland Predictions based on 0.5 ppt 50% EV under Existing Conditions
(Courtesy of the USACE Savannah District)

For the 48 foot proposed maximum channel depth, Figures 5-3 and 5-4 illustrate the location of the 0.5 ppt 50% EV for Front Middle and Back Rivers and potential wetlands impact using the Sigma grid.

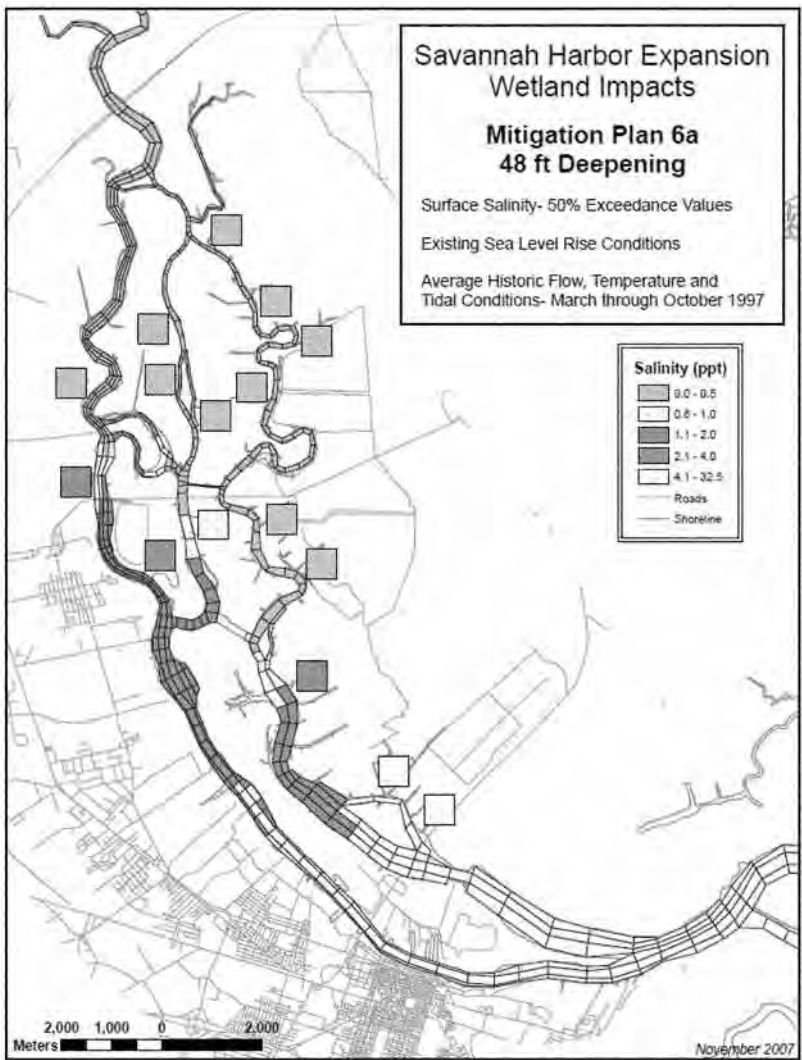


Figure 5-3 Locations of the Surface Salinity 0.5 ppt 50% EV under Deepening Conditions
(Courtesy of the USACE Savannah District)

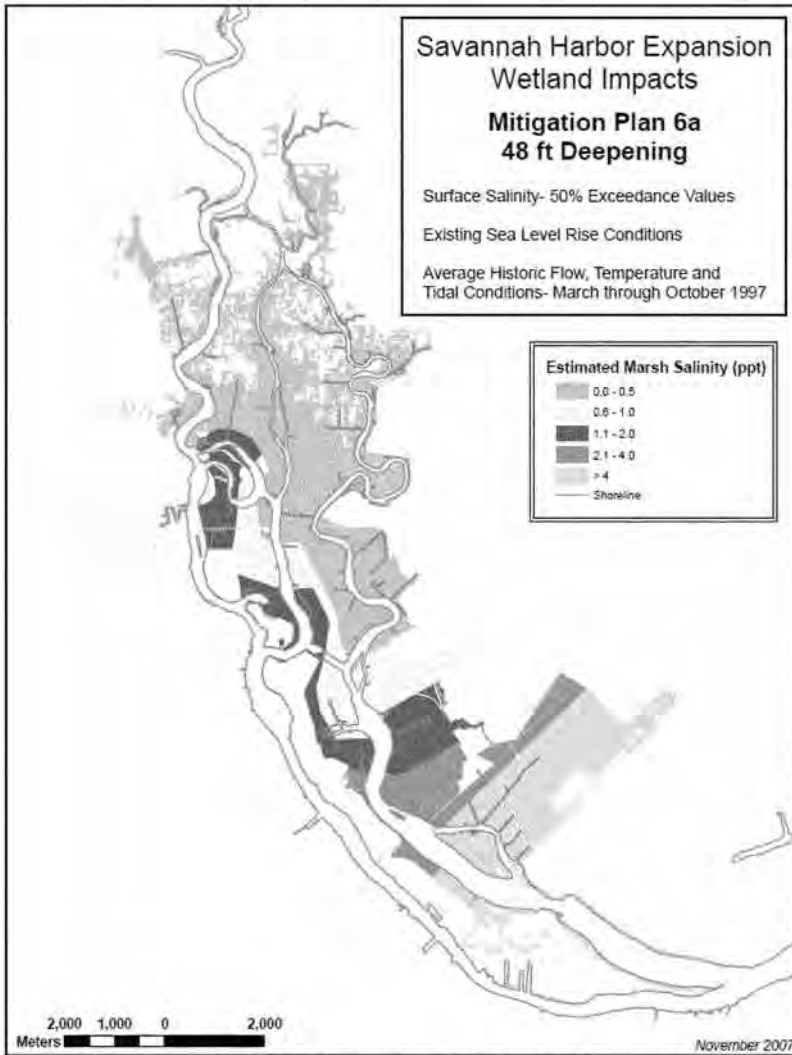


Figure 5-4 Wetland Predictions based on 0.5 ppt 50% EV under Plan6A
(Courtesy of the USACE Savannah District)

The following Sections compare the Zgrid and Sigma models predictions where the 0.5 ppt surface salinity at the 50% exceedance level occurs. The River Mile of each models cell that contains the surface salinity 0.5 ppt 50% was determined using the 1997 March 1 to November 1 predicted salinity data. The River Mile of where Houlihan Bridge crosses the rivers is used as a reference point. For the Front and Middle Rivers the Zgrid model predicts salinity moving slightly farther upstream, while on the Back

River the Zgrid salinity moves much farther downstream for the Plan6A predictions. Since the wetland impacts are based on the location of the 0.5 ppt surface salinity EV, the Zgrid model would move the fresh water wetlands boundary farther upstream for the wetlands in the vicinity of the Front and Middle Rivers and fresh water wetlands boundary downstream for those wetlands around the Back River.

5.1 Front River Surface Salinity 0.5 ppt 50% Exceedance Values

For existing conditions in the Front River, the Sigma Model predicts the 0.5 ppt 50% EV at River Mile 22.3, while the Z-Grid model predicts the 0.5 ppt 50% EV at River Mile 22.9. For reference Houlihan Bridge is at River mile 23.3.

For the 48 foot proposed maximum channel deepening scenario, the Sigma Model predicts the surface salinity 0.5 ppt 50% EV River Mile 23.1, while the Z-Grid model predicts the 0.5 ppt 50% EV River Mile 24.5.

In the Front River the Sigma Model extends the salinity impacts due to deepening 0.8 miles upstream while the Z-Grid extends the salinity impacts 1.6 miles upstream.

5.2 Middle River Surface Salinity 0.5 ppt 50% Exceedance Values

For existing conditions in the Middle River, the Sigma Model predicts the 0.5 ppt 50% EV at River Mile 1.9 while the Z-Grid model predicts the 0.5 ppt 50% EV at River Mile 3.5. For reference Houlihan Bridge is at River mile 2.1.

For the 48 foot proposed maximum channel deepening scenario, the Sigma Model predicts the surface salinity 0.5 ppt 50% EV River Mile 2.2, while the Z-Grid model predicts the 0.5 ppt 50% EV River Mile 3.9.

In the Middle River the Sigma Model extends the salinity impacts due to deepening 0.3 miles upstream while the Z-Grid extends the salinity impacts 0.4 miles upstream.

5.3 Back River Surface Salinity 0.5 ppt 50% Exceedance Values

For existing conditions in the Back River, the Sigma Model predicts the 0.5 ppt 50% EV at River Mile 6.3 while the Z-Grid model predicts the 0.5 ppt 50% EV at River Mile 6.1. For reference Houlihan Bridge is at River mile 7.3.

For the 48 foot proposed maximum channel deepening scenario, the Sigma Model predicts the surface salinity 0.5 ppt 50% EV River Mile 5.4, while the Z-Grid model predicts more upstream fresh water coming down the Back River on outgoing tide pushing the 0.5 ppt 50% EV to River Mile 2.6.

In the Back River the Sigma Model extends the salinity impacts due to deepening 0.9 miles downstream while the Z-Grid extends the salinity impacts 3.5 miles downstream.

6.0 DISSOLVED OXYGEN COMPARISON BETWEEN SIGMA GRID AND Z-GRID

The WASP water quality model had been updated between the Sigma grid WASP model and the Z-Grid WASP model. Some of the major updates were 1) the method of transferring the advection coefficient between EFDC and WASP in the hydrodynamic linkage file; 2) the method of calculating O'Connor-Dobbins reaeration rate using the top layer depth (Sigma WASP) and total depth (Z-Grid WASP) and 3) the different methods in handling the marsh loading. Due to these differences a meaningful side-by-side comparison of the predicted D.O. values was not practical. Each model was calibrated to predict the 1997 and 1999 measured D.O. values and therefore under existing conditions will behave similarly. However the following subjective conclusions can be made based on how each model transfers mass and salinity through out the harbor.

For point source dischargers, since the decay rates are very similar, the response of each models' D.O. predictions to BOD and ammonia loads will be similar.

For the Plan6A mitigation scenario, since the Z-Grid model extends the salinity farther upstream, the Z-Grid model will extend the low D.O. range (D.O. less than 4 mg/l) a little farther upstream.

For the oxygen injection scenario the Z-Grid model will distribute the additional oxygen farther upstream in both the Front and Middle Rivers. Since the deepening impacts the D.O. in the upper areas of the Harbor (around River Miles 25 to 26) and the Z-Grid model moves oxygen farther upstream the Z-Grid model would predict less oxygen needed to mitigate the deepening D.O. impacts.

7.0 CONCLUSIONS

For the Front River, the Z-Grid model compared to the Sigma model shows higher surface salinity at Houlihan Bridge, by 0.5 ppt for the existing conditions and 0.9 ppt for the deepening scenario. The Z-Grid model compared to the Sigma model moves the surface salinity 0.5 ppt 50% EV farther upstream 0.6 miles for the existing conditions and 1.4 miles upstream for the deepening scenario.

For the Middle River, the Z-Grid model compared to the Sigma model shows higher surface salinity at Houlihan Bridge, by 0.7 ppt for the existing conditions and 2.0 ppt for the deepening scenario. The Z-Grid model compared to the Sigma model moves the surface salinity 0.5 ppt 50% EV farther upstream 1.6 miles for the existing conditions and 1.7 miles upstream for the deepening scenario.

For the Back River, the Z-Grid model compared to the Sigma model shows higher surface salinity at Houlihan Bridge, by 0.2 ppt for the existing conditions and 0.0 ppt for the deepening scenario. The Z-Grid model compared to the Sigma model moves the surface salinity 0.5 ppt 50% EV farther downstream 0.2 miles for the existing conditions and 2.8 miles downstream for the deepening scenario.

The net impact on the wetlands due to the deepening, at the 0.5 ppt 50% EV, was estimated using Figures 5-2 and 5-4. The Sigma model predicted a net change of 337 acres of freshwater marsh conversion with the 48-foot depth alternative (Table 2 USACE November 2007 Evaluation of Marsh/Wetlands Impacts with Proposed Mitigation Plan). The Z-Grid model produces approximately 75 percent of the net change in the amount of wetlands as the Sigma model.

Since the Z-Grid model appears to include more tidal mixing, it should show that injected oxygen distributes farther upstream to critical D.O. impact areas. This should help (and not hinder) the performance of the proposed D.O. mitigation systems.

Overall, the Z-Grid model identifies less area of wetland impacts than the Sigma model, therefore using the Sigma model's mitigation estimates would adequately compensate for the deepening impacts.

Also, the Sigma model was peer reviewed by the Modeling Technical Review Group (MTRG) and its successor the Water Quality Interagency Coordination Team, with Agency Technical Review (ATR), and Independent Expert Peer Review (IEPR) in 2005 and 2006. The Sigma model was finalized in the modeling report (Tetra Tech 2006) with agency letters in March 2006 accepting the Sigma model as sufficient for analyzing harbor deepening.

Therefore, our recommendation is to continue to use the Sigma model for the impacts and mitigation analysis for harbor deepening. Since EPA has adopted the Z-Grid model for its TMDL analyses, the Corps could incorporate it if SHEP proceeds to construction.

8.0 REFERENCES

- Hamrick, J. M., 1992: A Three-Dimensional Environment Fluid Dynamics Computer Code: Theoretical and Computational aspects. The College of William and Mary, Virginia Institute of Marine Science, Special Report 317, 63 p.
- Tetra Tech, Inc., 2006: Development of the Hydrodynamic and Water Quality Models for the Savannah Harbor Expansion Project. Atlanta, Georgia.
- Tetra Tech, Inc., 2010: Savannah Harbor Model Update
- USACE, 2007: Savannah Harbor Project – Evaluation of Marsh/Wetlands Impacts with Proposed Mitigation Plan.



REPLY TO
ATTENTION OF

DEPARTMENT OF THE ARMY

SAVANNAH DISTRICT, CORPS OF ENGINEERS
P.O. BOX 889
SAVANNAH, GEORGIA 31402-0889

Planning Division

AUG 01 2011

Mr. Chris Beckham
Project Manager
Water Quality Certification and Wetlands Section
South Carolina Department of Health
and Environmental Control
2600 Bull Street
Columbia, South Carolina 29201

Dear Mr. Beckham:

I am writing to you about the Savannah Harbor Expansion Project. You raised several issues in your June 16, 2011 letter, which I will address.

You requested the Corps' response to letters you had received as a result of the public notice for water quality certification. We provided those responses to you by email on July 13, 2011.

You requested additional information about two water quality modeling issues. The first concerned whether the oxygen injection system design would perform as intended in the shallow waters of Back River. We developed additional information on that issue and provided a report by email last week. The second issue was a comparison of the hydrodynamic model the Corps used to evaluate potential impacts from this project and a later version used by EPA in its TMDL update. We developed additional information on that issue and provided a report by email earlier today. We request a meeting the week of August 15 to discuss any remaining concerns you may have on those issues.

You commented on the values used in the wetland mitigation SOP calculations. We continue to believe the selected values are appropriate. The USFWS concurs with that position, as they adopted those values in the Fish and Wildlife Coordination Act Report that they prepared. As you stated, the values were selected based on years of discussion in the Wetland Interagency Coordination Team, which placed a higher value in this estuary on tidal freshwater wetlands than on brackish marsh or saltmarsh. Your letter correctly identified historic impacts to tidal freshwater wetlands in this estuary as the reason behind those priorities. The team expressed a preference for restoration of

wetlands in the estuary to their former states. The values the Corps used in the SOP calculations reflect those stated agency preferences. Further detailed analysis (provided at the June 1, 2011 interagency meeting) of field investigations conducted in this estuary indicates that vegetative changes identified through modeling likely overstate the effects that would be observed in the field if the harbor is deepened.


The approach the Corps used in the SOP calculations also reflects the interagency coordination that occurred on this project. The agencies requested the Corps first identify the impacts that would occur if the harbor is deepened, then evaluate mitigation measures that could be included to reduce those impacts.

Due to the unique nature of this project and its secondary effects, the impact predictions and the resulting mitigation are addressed differently than those for a Regulatory project impact or wetland mitigation bank. This application of the SOP differs from a normal Regulatory application because the natural resource agencies requested the Corps provide information on this project's impacts with and without its mitigation features. Savannah District used the SOP's restoration worksheet to capture the effects of the project's mitigation features to comply with that desire of the resource agencies. Since the District is not proposing to establish a commercial wetland mitigation bank with the acreage identified as being "restored" in the with-project but without-mitigation scenario, protection of those wetlands in perpetuity is not appropriate.

The proposed project includes mitigation for all wetland impacts, including the calculated conversion of saltmarsh to brackish marsh. Wherever practicable, in-kind mitigation is proposed. The SOP calculations include the modeled reduction in saltmarsh acreage as an impact that is subsequently compensated by either restoration of brackish marsh or preservation of freshwater wetlands. The ecological value of the saltmarsh is included in the SOP analysis.

We trust that this letter and the information we recently provided by email satisfies the Department's need for additional information. We appreciate your continued coordination throughout the certification process and look forward to receiving certification for a project of such significance to the Nation and the region's economy.

If you have any additional questions, please feel free to contact me at william.g.bailey@usace.army.mil or 912-652-5781.



William Bailey
Chief, Planning Division

McIntosh, Margaret (Mackie) SAS

From: Bailey, William G SAS
nt: Friday, September 09, 2011 11:38 AM
: Hall, Jeffrey M COL SAS
Cc: Oddi, Peter A SAS; Okane, Jason D SAS; McIntosh, Margaret (Mackie) SAS
Subject: SHEP: Information for SC DHEC (UNCLASSIFIED)
Attachments: DOT to Corps April 11 2011 Adapt Mngmnt.pdf

Classification: UNCLASSIFIED

Caveats: NONE

You asked for the following information:

1. Operating costs for the dissolved oxygen systems

The Final EIS will show the long term O&M costs as being \$1.2M per year. We would add those costs to our normal funding requests for maintenance of the Savannah Harbor Navigation Project. In recent years, we have generally received from \$12M to \$17M to operate and maintain that project.

2. Latest wording on funding of adaptive management

The Final EIS contains a plan to obtain funds for the adaptive management. The non-Federal sponsor has agreed to set aside their portion of the adaptive management funds prior to the start of the dredging (see attached letter from GA DOT). The Corps would request and obtain Federal funds during the construction (dredging) period. A reasonable amount would be carried over if not expended in a given fiscal year.

3. Latest wording on wetland analysis (SOP calculations)

The following language from Appendix C of the Final EIS describes the wetland analysis and SOP process:

Page 53: "The Corps took the impact data produced by the approved hydrodynamic model as the starting point for the SOP. The output included acreage for wetlands at different levels of salinity. The Corps then evaluated the output both before and after the flow-altering features are included in the project. Wetland types that would experience a net loss in acreage were identified as ones that would experience an adverse impact. In a similar manner, wetlands that would experience an increase in net acreage would benefit from and be restored by the project. Finally, the model output was used to characterize and quantify 3 classifications of wetlands - Freshwater (<0.5 ppt), Brackish (0.5 to 4.0 ppt), and Saltmarsh (>4.0 ppt).

Using the previously-described approach, adverse impacts were evaluated with respect to wetlands classified as Freshwater, Brackish and/or Saltmarsh. Model results documented that restoration could occur in either Freshwater or Brackish marsh. The flow-altering features were the primary means through which the net acreage in Freshwater and Brackish marsh would increase. In the 44-foot depth alternative, the flow-altering features of Plan 6B would result in net increases in both Freshwater and Brackish marsh acreage, with a corresponding decrease in Saltmarsh acreage. The natural resource agencies had previously determined Freshwater and Brackish marshes to be more valuable than Saltmarsh in the evaluation of this project. Since the 44-foot depth alternative with the Plan 6B flow-altering features would

result in net increases in Freshwater and Brackish marsh acreage, the plan would fully mitigate that alternative's adverse impacts to wetlands."

Page 55: "The Corps shared its SOP calculations with the Wetlands Interagency Coordination Team (comprised of EPA, USFWS, NOAA Fisheries, SAC DNR, SC DHEC, GA DNR-EPD, and DNR-CRD). In the Draft Fish and Wildlife Coordination Act Report, the USFWS recommended changes to certain factors the Corps proposed to use in the calculations. The Corps agreed with the Service's recommendations and the numbers shown above reflect the factor values supported by the USFWS in their Draft F&W Coordination Act Report, which was included in the DEIS. The Final F&W Coordination Act Report does not address specific factor values, but concurs in the numbers shown above.

Although Savannah District had coordinated use of the SOP with the Wetland Interagency Coordination Team during the analysis period, some natural resource agencies expressed questions about certain aspects of the SOP calculations and its overall application during their review of the DEIS. SC DNR and EPA questioned the use of "0" as the Dominant Effect for expected adverse impacts to saltmarsh. The Corps had selected that value in recognition of the views expressed by the Wetland ICT that (1) freshwater wetlands are presently the most ecologically valuable type of wetland in the estuary (because of losses they have experienced over time), and (2) the Corps should take measures where possible to restore freshwater and brackish marshes in the estuary. The Corps' 2011 detailed analysis of likely wetland effects of the project from salinity changes (contained in Section VII of this appendix) indicates that noticeable changes in existing saltmarsh are unlikely from the expected changes in salinity. This supports the Corps' assignment of a "0" Dominant Effect value for those changes.

SC DNR questioned the use of "1.4" for the Net Improvement in Vegetation for the additional acreage of brackish marsh that is calculated to occur. The Corps selected that value because it had divided the marshes in to the three classifications identified by the Wetland Interagency Coordination Team - Freshwater, Brackish, and Saltmarsh. Using the guidelines recommended by the ICT for the wetland categories, the acreage of brackish marsh would increase as a result of the proposed flow rerouting features. Brackish marsh would exist where it otherwise would not. Those newly created brackish marshes would be fully functioning and thus should receive the highest Net Improvement in Vegetation factor available for that category of wetlands.

SC DNR questioned the use of the flow rerouting features as restoration in the SOP. The Corps does not intend to set a precedent by such an application, but the application reasonably reflects the extensive coordination that the Corps had over the years with the Wetland ICT (natural resource agencies) in the development of mitigation plans for this project. Potential adverse effects to saltmarsh predicted using the salinity criteria recommended by the Wetland ICT are included in the SOP calculations.

This is a unique use of the Regulatory SOP that neither Savannah District nor EPA consider precedent-setting. Some mechanism was needed to quantify the amount of mitigation remaining after the flow rerouting was added to the deepening project. The SOP was not designed for such use, but it is a reasonable tool for that purpose. The Regulatory SOP was one of the tools that the Corps used in the development of the mitigation plans. The SOP was not the single mechanism that was used to identify how much mitigation should be performed or the suitability of a potential mitigation measure. Those decisions required consideration of many factors, as described in the previous and subsequent portions of this appendix.

Savannah District consulted the Corps' Center of Expertise for Ecosystem Restoration to confirm that the Regulatory SOP was a technically sufficient method of determining the amount of acres that the Project would need to acquire and preserve in order to compensate for adverse impacts to wetlands. The Center concurred that the SOP was a technically sound technique. Their review can be found in Appendix U. They noted that -- as with other

techniques -- the results depend heavily on the values assigned to specific parameters in the analysis. They also noted that with the approach followed in this application, much of the mitigation requirement was being driven by conversion of saltmarsh to brackish marsh, an activity which was reportedly a goal of the natural resource agencies for this estuary."

Summary: The District is comfortable with the technical analysis that it has performed to evaluate potential indirect impacts to wetlands and application of the Regulatory SOP to quantify mitigation that is still warranted after the flow re-routing features. All natural resource agencies do not concur with each aspect of the analysis, but the analysis reflects the guidance provided by the Wetlands Interagency Coordination Team when the analysis was being developed. The District's results agree with those contained in the USFWS Fish and Wildlife Coordination Act Report, which is intended to incorporate the views of all the natural resource agencies.

William Bailey
Chief, Planning Division

Classification: UNCLASSIFIED
Caveats: NONE



C. Earl Hunter, Commissioner

Promoting and protecting the health of the public and the environment.

September 30, 2011

Colonel Jeffrey M. Hall, District Commander
U.S. Army Corps of Engineers, Savannah District
P.O. Box 889
Savannah, Georgia 31402-0889

Re: Savannah Harbor Expansion Project: SCDHEC-OCRM Coastal Zone Consistency Determination

Dear Colonel Hall:

As you know the staff of SCDHEC-OCRM provided our determination regarding consistency of the referenced project in our letters of January 25 and 31, 2011. My staff and I appreciate the efforts of you and your staff in meeting with and providing additional explanatory information regarding the Savannah Harbor Expansion Project. Much time has been spent by my staff thoroughly reviewing this information. After careful consideration, SCDHEC-OCRM stands by its January 25 and 31, 2011 letters objecting to the Corps determination that the SHEP project is fully consistent with the enforceable regulations and policies of South Carolina's Coastal Tidelands and Wetlands Act and the accompanying Coastal Zone Management Program.

Sincerely,

Carolyn Boltin-Kelly
Carolyn Boltin-Kelly, Deputy Commissioner
SCDHEC-Office of Ocean and Coastal Resource Management

cc: Earl Hunter, Commissioner, SCDHEC
Donna Weiting, Acting Director, NOAA-OCRM

SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
Ocean and Coastal Resource Management

Charleston Office • 1362 McMillan Avenue • Suite 100 • Charleston, SC 29405 • Phone: (843) 953-0200 • Fax: (843) 953-0201 • www.scdhec.gov



Bureau of Water
2600 Bull St
Columbia SC 29201

Public Notice # 2010 SHEP

Public Notice Date: September 30, 2011

NOTICE OF DEPARTMENT DECISION – STATE CERTIFICATION

The South Carolina Department of Health and Environmental Control (Department), acting on an application for Water Quality Certification pursuant to Section 401 of the Federal Clean Water Act, and Construction in Navigable Waters Permit pursuant to R. 19-450. et. Seq., 1976 SC Code of Laws has reached a proposed decision for the project described below:

US Army Corps of Engineers, Savannah District
Savannah Harbor Expansion Project
Savannah River
Jasper County
P/N 2010 SHEP

After reviewing the project plans, staff of the Division of Water Quality determined that there is a not a reasonable assurance that the project will be conducted in a manner consistent with the certification requirements of Section 401 of the Federal Clean Water Act.

Accordingly, the Department proposes to deny State Certification for the proposed work.

The evaluation of the work was conducted by the Bureau of Water. A copy of the staff assessment supporting the proposed decision is enclosed. A copy of plans submitted by the applicant is available for review in the office of the Division of Water Quality, Bureau of Water. Additional information about the technical aspects of this application is available from Chuck Hightower, the section manager, at 803-898-0369.

The final State Certification will be denied if a request for an adjudicatory hearing is not granted by the Administrative Law Court (ALC).

The issuance of this Notice of Department Decision represents a final staff decision that may be appealed. The procedures for appeals went into effect July 1, 2006 pursuant to 2006 Act No. 387. Please see the attached page titled "Notice of Appeal Procedure" for details.

Chuck Hightower, Section Manager
Water Quality Certification
and Wetlands Section

cc: SC DHEC, Beaufort EQC Office District Office

Notice of Appeal Procedure
Pursuant to S.C. Code Section 44-1-60

1. This decision of the S.C. Department of Health and Environmental Control (Department) becomes the final agency decision 15 calendar days after notice of the decision has been mailed or otherwise sent to the applicant, permittee, licensee and affected persons who have requested in writing to be notified, unless a written request for final review accompanied by a filing fee in the amount of \$100 is filed with the Department by the applicant, permittee, licensee, or affected person.
2. An applicant, permittee, licensee, or affected person who wishes to appeal this decision must file a timely written request for final review with the Clerk of the Board at the following address or by facsimile at 803-898-3393. A filing fee in the amount of \$100 made payable to SC DHEC must also be received by the Clerk within the time allowed for filing a request for final review. However, if a request for final review is filed by facsimile, the filing fee may be mailed to the Clerk of the Board if the envelope is postmarked within the time allowed for filing a request for final review.

Clerk of the Board
SC DHEC
2600 Bull Street
Columbia, SC 29201

3. In order to be timely, a request for final review must be received by the Clerk of the Board within 15 calendar days after notice of the decision has been mailed or otherwise sent to persons entitled to receive notice. If the 15th day occurs on a weekend or State holiday, the request is due to be received by the Clerk of the Board on the next working day. The request for final review must be received by the Clerk of the Board by 5:00 p.m. on the date it is due. A request for final review will be returned to the requestor if the filing fee is not received on time as described above.
4. The request for final review should include the following:
 - a. the grounds on which the Department's decision is challenged and the specific changes sought in the decision
 - b. a statement of any significant issues or factors the Board should consider in deciding whether to conduct a final review conference
 - c. a copy of the Department's decision for which review is requested
5. If a timely request for final review is filed with the Clerk of the Board, the Clerk will provide additional information regarding procedures. If the Board declines in writing to schedule a final review conference, the Department's decision becomes the final agency decision and an applicant, permittee, licensee, or affected person may request a contested case hearing before the Administrative Law Court within 30 calendar days after notice is mailed that the Board declined to hold a final review conference.

The above information is provided as a courtesy; parties are responsible for complying with all applicable legal requirements.

STAFF ASSESSMENT

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL (SCDHEC)
DIVISION OF WATER QUALITY
WATER QUALITY CERTIFICATION, STANDARDS, AND WETLANDS PROGRAMS SECTION**

I. Background Information

Applicant: US Army Corps of Engineers, Savannah District (Corps) P/N Number: 2010-SHEP
P/N Date: November 15, 2010 Date Received: November 15, 2010 P/N Close: December 30, 2010
Section of Applicable Federal Law: ☒ Section 10 ☒ Section 404 ☒ Section 401

Section of Applicable State Law: ☐ Coastal Zone Consistency ☒ Construction in Navigable Waters Permit

Brief explanation and purpose of activity: The proposed activity consists of deepening the federal navigation channel along the Savannah River. The purpose of the activity is to increase the efficiency of navigation within the Savannah Harbor.

Waterbody Name: Savannah River Water Classification: FW, SA, and SB

Waterbody Location: Jasper County, South Carolina

Waterbody on 2010 303(d) List?

☒ Yes, the lower Savannah River is impaired for aquatic life use, recreational use, and fish consumption due to zinc, fecal coliform bacteria, and mercury, respectively.
☐ No

II. Project Description**A. Description**

The proposed work consists of dredging the 32.5 mile Savannah Harbor navigation channel in the Savannah River. The current navigational depth ranges from 30' mean low water (MLW) in the inner harbor to 44' MLW in a portion of the entrance channel. The current channel width ranges from 200' in the upper most areas of the project area to 600' in the entrance channel. Rapid shoaling rates in the navigation channel inhibit the ability to maintain an exact project depth at all times; therefore, the project uses allowable overdepth and advance maintenance procedures to counteract the effects of shoaling. The existing channel includes 2 feet allowable overdepth and up to 6' of advance maintenance. Several depths are being considered for the deepening project. The depths being considered are 44, 45, 46, 47, and 48 feet MLW within the inner harbor navigation channel. The deepening would allow for existing side slopes except in the bend widenings. The overall length of the project is also determined by the depth alternatives since the entrance channel will extend until the depth of the navigation channel matches the depth of the ocean bottom. The proposed deepening will also incorporate the existing overdepth and advance maintenance that is currently allowed for the existing project. The Corps submitted a Draft Environmental Impact Statement (EIS) and Draft General Reevaluation Report (GRR) that was as part of the permit application for this project.

B. Fill

1. Is fill required? ☐ Yes ☒ No If no, proceed to Section II. C.

Amount	cubic yards	acres
Total	-	-
Wetlands	-	-
Open Waters of U. S.	-	-

2. Is the fill temporary? ☐ Yes ☐ No

C. Excavation

1. Is excavation required? ☒ Yes ☐ No If no, proceed to Section II. D.

Amount	cubic yards	acres
Total	14,935,186	-
Wetlands	-	15.68
Open Waters of U. S.	14,935,186	-

2. Is dredge spoil site adequately sized for the amount of material?
☒ Yes, the Corps plans to use existing dredge material containment areas.
☐ No

D. Other Impacts: ☒ Yes ☐ No

In addition to the direct wetland impacts, the project includes indirect impacts to wetlands by changes in salinity, impacts to water quality in the Savannah River, fisheries impacts, and impacts to threatened and endangered species. The draft EIS does not specify the exact depth of the project, but does make the recommendation to deepen the harbor to 47' or 48'. Generally, the environmental impacts decrease as the depth of the deepening decreases. It should be noted that the difference in project impacts from the 47' and 48' depth are not significant. Although the impacts for each depth alternative were provided in the draft EIS, the impacts discussed in this assessment will focus on the maximum allowable depth of 48'.

The indirect wetland impacts from this project will occur primarily by changing the salinity within the various wetland types adjacent to the project area. For the purposes of evaluating this project, the wetland types affected by the project were classified according to salinity. The salinity threshold used to determine freshwater wetlands is <0.5 ppt, brackish wetlands were considered to have a salinity between 0.5 and 4.0 ppt, and saltmarsh was considered to have a salinity >4.0 ppt. The extent of the salinity conversion varies greatly based on which depth alternative is selected as the final project depth. For the 48' deepening, salinity will be increased in 337 acres of freshwater wetlands, and salinity will decrease in 730 acres of saltmarsh. The 337 of freshwater wetlands that will be lost are located primarily in the state of Georgia, and the saltmarsh impacts are located mostly in South Carolina.

The project will also have an adverse effect on water quality in the Savannah River estuary. Dissolved Oxygen (DO) levels in the lower Savannah River have been a concern for a number of years. In some areas of the river, natural conditions have caused a situation in which DO levels in the harbor are below applicable water quality standards during the warm summer months. Although this portion of the Savannah River is not currently listed on the South Carolina 303(d) list for impairment due to DO, a Total Maximum Daily Load (TMDL) has been developed for the lower Savannah River watershed. In 2006, the EPA published a TMDL report for the Savannah Harbor, and this report was later revised in 2010.

The proposed deepening will exacerbate the existing DO problem within the river for several reasons. A deeper channel will limit the ability of oxygen to reach the river bottom. An enlarged channel prism will move more saltwater to the upper portions of the harbor and into the estuary, further decreasing the ability of those waters to

accept oxygen from the air. The enlarged channel prism will also decrease flow velocity, which will reduce mixing of oxygen throughout the water column. Lower DO levels within the river system will have a deleterious effect on aquatic life use, and will limit the ability of the estuary to handle point and non-point source pollution loads entering the estuary. The Corps has proposed mitigation to offset these water quality impacts.

Some impacts to fisheries will also occur from the proposed project. The primary species that will be impacted by this project are Striped bass and Shortnose sturgeon. The proposed project will adversely affect these species by altering spawning, egg development, and larva habitat within the river system. Federally endangered species such as Shortnose sturgeon, Atlantic sturgeon, various sea turtles, and West Indian manatees may all be impacted by the project. The loss of a significant portion of Shortnose sturgeon habitat due to lower DO levels and salinity intrusion is of particular concern. A Biological Assessment of Threatened and Endangered Species (BATES) is included in the draft EIS. The Corps has proposed mitigation for the impacts to Shortnose sturgeon and Striped bass.

E. Project Modification

Was the project modified from the original public notice?

☒ Yes,

☐ No

This project was modified from the original public notice. The original public notice included 14.08 acres of direct impact to wetlands. Since the public notice was published on November 15, 2010, the direct impacts to wetlands were increased to 15.68 acres of wetlands.

F. Compensatory Mitigation

Is compensation required by SCDHEC?

☒ Yes

☐ No

☐ N/A

The project will require many extensive mitigation measures to offset each of the various direct and indirect impacts from this project. Various mitigation components of the project include a plan to offset DO impacts by using oxygen injection, a plan to offset the direct and indirect impacts to wetlands from excavation and changes in salinity, a plan to offset the loss of fisheries habitat, and a plan to install fish passage to offset impacts to Shortnose sturgeon.

Since the waters within the lower Savannah estuary will sustain impacts from the reduced DO levels resulting from the proposed deepening, the Corps plans to inject oxygen into the water column to raise DO levels. The injection system will utilize Speece Cones to directly inject oxygen into the river to increase the DO concentration throughout the waterbody. The effects should raise DO levels to acceptable levels as the super oxygenated water is pumped through diffusers back into the river. Modeling data has been provided to determine the extent to which this system will oxygenate the water, and to show the effectiveness of the system to achieve acceptable DO levels.

To achieve the modifications to the harbor proposed by the Corps, some wetlands must be impacted along the shoreline of the navigation channel. The deepening project will cause approximately 15.68 acres of direct impacts to saltmarsh in six different areas. These direct impacts will not vary with each of the depth alternatives. The proposed mitigation for these direct impacts will include the restoration of saltmarsh by reducing the elevation within a confined disposal facility (CDF) located near the confluence of the Front and Middle Rivers. This mitigation activity will consist of grading down high ground within the CDF to an elevation that will allow the growth of *Spartina alterniflora*. Once the appropriate elevation changes are made to site, the restoration area will be allowed to vegetate naturally.

In total, the project will cause indirect impacts to 1,212 acres of freshwater wetlands for the 48' deepening. To avoid and minimize these impacts, several plans were presented in the draft EIS to alter flows by constructing

structures or modifying the channel to decrease salinity in the affected wetlands. The flow altering measures are designed to divert the flow of freshwater into the impacted wetlands, and prevent saline waters from moving inland from the ocean to protect sensitive freshwater tidal wetlands. Many of these freshwater wetlands are located in the Savannah National Wildlife Refuge (SNWR). After implementing the flow altering component of the mitigation plan, there will be approximately 337 acres of freshwater wetlands impacted by increased salinity and approximately 730 acres of saltmarsh impacted by decreased salinity.

To offset the loss of the 337 acres of freshwater wetlands, the Corps proposes to purchase and preserve several ecologically valuable pieces of property. The land proposed for purchase is currently included in the SNWR land acquisition plan, but is under private ownership. The Corps plans to purchase the identified properties, and preserve this land in perpetuity by incorporating the land into the refuge. This acreage has mixed ecological communities and includes both upland and wetland areas. The 337 acres of freshwater wetland impacts will require 3,033 mitigation credits and the preservation component of the mitigation plan will generate 3,219 credits.

An additional component of the wetland mitigation plan includes the restoration of 1,068 acres of brackish marsh. This marsh will be restored as a result of the harbor deepening and flow altering structures. In addition to the impacts to the 337 acres of freshwater wetlands discussed above, the project will impact 730 acres of salt marsh by lowering salinity. The 730 acres of impacts to saltmarsh will require 4,672 mitigation credits. Both the impacted freshwater marsh and the saltmarsh will convert to brackish marsh. The Corps is proposing to take 4,485.6 mitigation credits for the restoration of brackish marsh.

Endangered species impacts are evaluated by resource agencies such as the USFWS and the National Marine Fisheries Service (NMFS). The Corps discussed the fishery impacts from the project in detail with the resource agencies to develop a mitigation plan to offset the loss of fisheries habitat. In summary, the mitigation for impacts to Striped bass habitat will be provided by contributions to the Georgia Department of Natural Resources Striped bass restocking program. To mitigate for impacts to Shortnose sturgeon, the Corps will enhance access to historic sturgeon spawning grounds by installing a fish passage structure at the New Savannah Bluff Lock and Dam. In addition, the Corps will construct a sill in the Middle River to protect important nursery habitat for juvenile sturgeon.

G. Remediation

Is remediation required? ☐ Yes ☒ No ☐ N/A

H. Nonpoint Source Concerns

1. Are water quality impacts from nonpoint sources expected?

☐ Yes

☒ **Temporary**, water quality impacts from non-point sources will be minimized and should not contravene the water quality standards or existing and classified uses of the involved waterbody, if the applicant adheres to the conditions in Section VIII of this staff assessment during and after the project.

☐ No

2. Has the applicant addressed nonpoint source concerns? ☒ Yes ☐ No ☐ N/A

3. Are any enforceable nonpoint controls required by SCDHEC?

☒ Yes, water quality impacts from nonpoint sources will be minimized and should not contravene the water quality standards or existing and classified uses of the involved waterbody, if the applicant adheres to the conditions in Section VIII of this staff assessment during and after the project.

☐ No

III. Environmental Assessment

A. Is the proposed activity water dependent? (x) Yes () No

B. Are there feasible alternatives to the proposed activity?

The applicant considered many factors in developing the plans for the proposed project. A detailed alternatives analysis is included in Appendix O of the draft EIS. The alternatives considered by the Corps were developed to alleviate several inefficiencies related to navigation problems within the existing Savannah. Existing shippers utilizing the Savannah Harbor are experiencing inflated shipping costs due to light loading and tidal delays. In addition, light loading and tidal delays will increase as present harbor users increase their annual tonnage and as larger, more efficient ships replace smaller ones. Another problem within the current harbor configuration is that existing ships are experiencing problems with turning capabilities and maneuverability in certain reaches of the inner harbor. As vessel size increases as projected in future years, the severity of these problems will increase.

The EIS evaluated several different terminal locations to remedy the navigation problems in the harbor. These alternatives are listed in Appendix O. The analysis included consideration of a deep water channel to alternative terminal locations. Of the alternative sites considered, four are located in South Carolina and included building a terminal at dredge disposal facilities 12A, 14A, 14B, and at Jones/Oysterbed Terminal. It should be noted that dredge site 14A and 14B are the sites presently under consideration for a Jasper Ocean Terminal. According to the analysis in the draft EIS, the Garden City Terminal of the Georgia Ports Authority best met the criteria of completeness, effectiveness, efficiency, and acceptability. Of all the alternatives considered, the proposed deepening to the Garden City Terminal is the only feasible alternative that will alleviate the navigational problems in the Savannah Harbor. Even if alternative terminal location were developed, the existing harbor would continue to experience the navigational problems previously mentioned.

The Corps also evaluated alternative channel depths to reduce environmental impacts while still achieving the project purpose of increasing harbor navigation efficiency. The draft EIS included consideration of various channel depths from 42' to 48' deep. As channel depth increases, the economic benefits also increase. A detailed economics analysis that included various mitigation features to offset the deepening impacts showed that the 47 foot alternative appears to be the plan that would provide the most economic benefit to the nation. For this reason, the alternatives analysis in draft EIS recommends the 47' deepening or the 48' deepening.

It should be noted that the draft EIS concluded that there are no feasible alternatives to the proposed activity. This conclusion is very difficult to evaluate with the information provided in the draft EIS and the GRR. By focusing the project purpose on improving navigation in the existing Savannah Harbor, the Corps significantly limited the scope of alternatives that were available. By limiting the project purpose, the Corps may have excluded from consideration some feasible alternatives. It is possible that less environmentally damaging alternatives exist that could provide similar benefits to the national economy.

C. Water Quality Assessment

Numeric Standards Contraventions?

() Yes

(x) Temporary, the proposed work may cause a temporary increase in turbidity levels, but ambient conditions should resume once the work is completed. Water quality standards will not be contravened and designated uses will not be changed. Potential adverse impacts to water quality can be minimized through the use of best management practices, and the conditions described in Section VIII of this staff assessment.

() No

IV. Public Comments Received and Summary of Comments

A. S. C. Department of Natural Resources (SCDNR)

Date: January 25, 2011

- ☐ Does not object to project provided the applicant adheres to the conditions in Section VIII.
☐ Hold in abeyance.
☒ Objects to the proposed project
☐ No objection.
☐ Has elected to not conduct an investigation nor provide any comments.

The SCDNR submitted a comment letter on the proposed project which stated several concerns about the proposed harbor deepening. The letter urged the Corps to pursue minimal channel deepening to reduce the environmental impacts of the project. Also, the SCDNR asked the Corps to consider alternatives such as developing the Jasper Terminal to reduce the environmental impacts of the project.

B. U. S. Fish and Wildlife Service (USFWS)

Date: April 28, 2011

- ☐ Does not object to project provided the applicant adheres to the conditions in Section VIII.
☐ Hold in abeyance.
☐ Objects to proposed project
☒ No objection.
☐ Has elected not to take a position at this time.

The USFWS reviewed the proposed project for potential impacts to threatened and endangered species. The agency concurred with the Biological Assessment of Threatened and Endangered Species included in the draft EIS which stated that the project "may affect, but is not likely to adversely affect" the various threatened and endangered species that under the purview of the USFWS.

C. Southern Environmental Law Center (SELC)

Date: January 25, 2011

- ☐ Does not object to project provided the applicant adheres to the conditions in Section VIII.
☐ Hold in abeyance.
☒ Objects to the proposed project
☐ No objection.
☐ Has elected to not conduct an investigation nor provide any comments.

The SELC submitted a detailed letter and several exhibits listing a wide range of concerns about the proposed project. The organization objects to the proposed project and has substantial concerns that the project does not comply with federal regulations, including Section 401 of the Clean Water Act.

D. United States Environmental Protection Agency (EPA)

- ☐ Does not object to project provided the applicant adheres to the conditions in Section VIII.
☐ Hold in abeyance.
☐ Objects to proposed project
☒ No objection.
☐ Has elected not to take a position at this time.

Although the EPA does not specifically object to the project, the agency does have some concerns. The letter from EPA lists several concerns about water quality and the wetland mitigation, and the letter makes several project recommendations for the final EIS.

E. Savannah River Maritime Commission (SRMC)

Date: January 21, 2011

- () Does not object to project provided the applicant adheres to the conditions in Section VIII.
 () Hold in abeyance.
 (x) Objects to the proposed project
 () No objection.
 () Has elected to not conduct an investigation nor provide any comments.

The Savannah River Maritime Commission submitted a comment letter on this project on January 21, 2011. The SMRC letter describes four major issues with the project as proposed. One issue is that the project as designed will not allow the development of the Jasper Ocean Terminal. Secondly, the project is inadequate to support the projected growth in shipping. In addition, the environmental impacts to the Savannah River are significant. The final issue is that the draft EIS and GRR completely ignore the benefits that will accrue to South Carolina from a properly designed project.

V. Consistency with the Coastal Zone Management Program, R. 48-39-10 *et seq.*

Staff of the SCDHEC Office of Ocean and Coastal Resource Management (OCRM) found this project to be inconsistent with the State's Coastal Zone Management Act and Coastal Management Program in letters dated January 25, and January 31, 2011.

VI. Conclusion on Water Quality Impacts and Classified Uses

When evaluating the proposed work, the SCDHEC followed procedures for implementing State 401 Water Quality Certification regulations pursuant to Section 401 of the Clean Water Act, 33 U.S.C. Section 1341, and the requirements of Regulation 61-101, Water Quality Certification, and Regulation 19-450 *et seq.*, 1976 Codes of Laws, Construction in Navigable Waters Permitting Program.

The Savannah River is located on the South Carolina border and contains waters shared between South Carolina and Georgia. The South Carolina portion of the river where the project is located is in Jasper County. The lower Savannah watershed includes substantial aquatic resources. The 2008 Draft Fish and Wildlife Coordination Report identified 22,719 acres of emergent wetlands consisting of a mixture of salt tolerant and freshwater plant species. The report also identified 8,577 acres of forested wetlands consisting mainly of cypress/gum and scrub shrub species.

While many freshwater wetland areas exist along the lower Savannah River, much of the waterbody in the vicinity of this project is classified as SA and SB tidal saltwater with a site specific dissolved oxygen standard (DO) of not less than a daily average of 5 mg/l and a minimum of 4 mg/l. This area of the Savannah River is listed on the 2010 303(d) for impairment to aquatic life use due to zinc, for recreational use due to elevated fecal coliform bacteria levels, and for fish consumption due to mercury. The proposed project should not cause or contribute any additional impairment to these uses. The project area is included in the Savannah Harbor Total Maximum Daily Load (TMDL) for DO developed by the Environmental Protection Agency (EPA).

The Department is concerned about the impacts of the proposed project on water quality by lowering DO, and the plan to use Speece Cones to mitigate for this impact. During the review process for this Certification, the Corps was asked to submit modeling results that evaluated the effectiveness of the injection system to supply an adequate amount of oxygen to restore DO levels to pre-project conditions. The model results showed that the injection system does have the ability to achieve the required oxygen levels necessary to protect aquatic life use during the summer within the shallow water estuarine areas located in the South Carolina portion of the river.

While the injection system has been shown to provide the necessary amount of oxygen, the Department continues to have outstanding concerns about the use of mechanical means to offset the DO impacts of the project. Since the channel modifications proposed by the Corps will occur throughout the life of the project, the DO impacts will exist during the summer as long as the channel is maintained at the selected depth. Mechanical failure of the system would cause significant degradation to aquatic life within the estuary, and limit ability of the river to accept and assimilate pollutants. The Department does not have reasonable assurance that the increased DO deficit caused by the channel deepening will be adequately mitigated by the oxygen injection system. According to correspondence from the Corps dated September 12, 2011, the long term operating and maintenance costs associated with the DO injection system are \$1.2 million annually. These costs will be added to their normal funding requests. This system is a very costly method to mitigate for the projected impacts, and the funding for the long-term operational costs depends on unpredictable annual appropriations.

In assessing the water quality impacts of a project, the Department is required in Regulation 61-101 to address and consider several factors. One of these factors requires consideration of all potential water quality impacts, including the impact on existing and classified uses. Regulation 61-68, *Water Classifications and Standards*, was promulgated in accordance with Section 303 of the Clean Water Act. This regulation contains antidegradation rules that were established to ensure the protection of existing uses and water quality. Regulation 61-68 requires existing water uses and the level of water quality necessary to protect these existing uses to be maintained and protected regardless of the water classification. Regulation 61-101 requires the Department to certify that there is reasonable assurance that the activity will be conducted in a manner that will not violate applicable water quality standards. In absence of the oxygen injection system, the project will violate the antidegradation policy in Regulation 61-68. When considering the Department's concerns about the use of mechanical means with questionable funding to permanently maintain oxygen levels in the waterbody, the Department cannot certify that there is reasonable assurance that project will not violate applicable water quality standards.

In addition to the DO impacts associated with the project, the Department also has concerns about the wetland impacts. The proposed dredging and channel modifications will substantially alter the wetlands located in the lower Savannah River estuary. Early in the development phase of this project, an Interagency Coordination Team (ICT) was established to assist in evaluating the wetland impacts and mitigation. The results of this interagency coordination led to the mitigation proposal included in the permit application. The plan places an emphasis on minimizing the loss of freshwater tidally influenced wetlands, because these wetlands have historically been altered by past projects.

The proposed deepening will result in indirect impacts to 1,212 acres of freshwater wetlands. To reduce these impacts the Corps has proposed to modify the channel and construct flow diversion structures to increase freshwater flows and decrease salinity in these impacted wetlands. As result of the channel modifications, 337 acres of freshwater wetlands and 730 acres of salt marsh will be converted to 1,068 acres of brackish wetlands.

The Corps used the Savannah District Standard Operating Procedures (SOP) as a tool to quantify the indirect wetland impacts and determine appropriate compensation for the salinity conversion. The Corps calculated that 3,033 credits would be needed to mitigate for the loss of 337 acres of freshwater wetlands and 4,672 credits would be required to mitigate for the 730 acres of impacts to salt marsh.

With respect to the 730 acres of salt marsh that will be lost, the reduction in salinity will cause a vegetative shift by converting the dominant salt marsh plant species to a vegetative community dominated by more brackish species. Since this change will be minimal, a dominant effect level of 0 was used in the SOP calculation sheets to determine the required credits for the salinity change in the salt marsh. Then the Corps used the highest level (1.4) for the net improvement factor to determine that 4,485.6 credits will generated by the restoration of 1,068 acres of brackish marsh. The high net improvement value is not consistent with the low dominant effect level. Furthermore, the area proposed for restoration is comprised of the same wetlands where the impacts will occur. The Corps agrees that the vegetative shift from the salinity conversion is an impact and is proposing to take restoration credit for these impacts.

The Department is concerned about the precedent set by allowing the Corps to take restoration credit for wetlands that are included in the project impacts. In addition, the Corps has proposed no method of preservation for the wetlands for which restoration credit is being taken. This leaves the entire 1,068 acres of restored brackish marsh unprotected from threat due to any future harbor expansion activities. Without the credit from the brackish marsh restoration area, there is a large deficit in the amount of mitigation credit that will be provided for this project. In order to comply with the provisions in Section F of Regulation 61-101, the Department must require appropriate mitigation to ensure that functions and values in the ecosystem will be protected.

The approach to mitigation used by the Corps does not offset all of the project impacts since no mitigation is provided for the impacts to 730 acres of salt marsh for the 48' deepening. This plan diminishes the ecological value of salt marsh, while placing an arbitrarily elevated value to the creation of brackish marsh. Even though the vegetative shift that will occur from the change in salinity is minimal, there will be some loss to the habitat functions within the large area of converted salt marsh. This plan is not consistent with the state's regulatory obligation to protect existing uses in the ecosystem. The plan does not adequately compensate for all of the wetland impacts, nor does the plan meet the requirements of Regulation 61-101. Lack of appropriate mitigation means that functions within the ecosystem will be eliminated or impaired by the proposed activity. Allowing the Corps to take mitigation credit for the project impacts would also limit the Department's ability to evaluate mitigation proposals on any such future project.

When evaluating this project pursuant to Regulation 61-101, the Department identified potential impacts to endangered and threatened species from this activity. During the review for this project, the Department asked the Corps to provide concurrence from the resource agencies that the project will not cause adverse impacts to endangered or threatened species. Appendix B in draft Environmental Impact Statement (EIS) included a Biological Assessment of Threatened and Endangered Species (BATES). A letter was provided from the USFWS giving concurrence with the BATES; however, the letter acknowledged that some of the endangered species affected by this project fall under the responsibility of the National Marine Fisheries Service (NMFS). The Shortnose sturgeon is one of the species affected by this project that is under the purview of the NMFS.

The Corps acknowledges that the project will adversely impact waters containing the endangered Shortnose sturgeon and has been in consultation with NMFS. The impact to various life stage sturgeon habitat will occur largely from the change in salinity resulting from the project. The Corps has proposed mitigation to offset these impacts, however; the responsibility lies with the NMFS to determine whether or not the proposed mitigation is adequate to alleviate any adverse impacts. It is not likely that concurrence from NMFS will be provided prior to the regulatory timeframes to which the Department must adhere. Since the Department does not have concurrence from the NMFS on the project impacts and proposed mitigation, it would be impossible to completely evaluate any adverse effects on sturgeon. Regulation 61-101 states in Section F.(5)(c) that certification will be denied if the project adversely impacts waters containing State or Federally recognized rare, threatened, or endangered species. Therefore, the Department cannot certify that the project will not adversely impact waters containing endangered species without concurrence from the NMFS.

The Department's ability to certify the proposed activity has also been compromised by the alternatives analysis included in the draft EIS. Regulation 61-101 Section F.(5)(b) states that certification will be denied if there is a feasible alternative to the activity which reduces adverse consequences on water quality and classified water uses. By limiting the project purpose, the Corps may have excluded from consideration some feasible alternatives; therefore, the Department cannot certify that there are no feasible alternatives to the proposed activity.

Regulation 61-101 Section F.(5) states that certification will be denied if the proposed activity permanently alters the aquatic ecosystem in the vicinity of the project such that its functions and values are eliminated or impaired. This section of the regulation also states that certification will be denied if the proposed activity adversely impacts waters containing State or Federally recognized rare, threatened or endangered species. For the proposed activity, the applicant has not given reasonable assurance that existing uses will not be further impaired or eliminated from the proposed activity, nor has the applicant shown conclusively that the activity will not adversely impact waters containing the Federally endangered Shortnose sturgeon. Additionally, the Department cannot certify that there are no feasible alternatives to the

proposed project. Some alternatives may have been excluded from consideration due to the limited project purpose. This project does not meet the requirements for issuance of a Water Quality Certification pursuant to Section 401 of the Clean Water Act, 33 U.S.C. Section 1341, and the requirements of Regulation 61-101, Water Quality Certification. The proposed activity could result in significant degradation to the aquatic ecosystem or remove existing and classified uses of the Savannah River. Information about the technical aspects of this application is available from Chris Beckham, the project manager, by calling 803-898-4261 or by e-mailing beckhajt@dhec.sc.gov.

VII. Staff Recommendation

Deny 401 Water Quality Certification and Construction in Navigable Waters Permit

Prepared by:



Date:

9/29/11

Reviewed &
Approved by:



Date:

9/30/11

Notice of Right to Request Contested Case Hearing Before Administrative Law Court

S.C. Code §44-1-60(F)(2) provides that within thirty days after the receipt of the Board's written final agency decision an applicant, permittee, licensee, or affected person desiring to contest the final agency decision may request a contested case hearing before the Administrative Law Court, in accordance with the Administrative Procedures Act. A request for a contested case hearing before the Administrative Law Court (ALC) must be filed in accordance with the Rules of the ALC, including payment of the ALC's filing fee, at the following address:

Clerk's Office
South Carolina Administrative Law Court
Edgar A. Brown Building
1205 Pendleton St., Suite 224
Columbia, SC 29201

The ALC's Notice of Request for Contested Case Hearing form and the Rules of the ALC can be found at the ALC's website: <http://www.scalc.net>. If a party files a request for a contested case hearing with the ALC, the party must serve a copy of the request on DHEC and any other parties at the same time the request is filed with the ALC. A copy of the request for a contested case hearing must be delivered or mailed to DHEC at the following address:

Lisa L. Longshore
Clerk of the Board
SC DHEC
2600 Bull Street
Columbia, SC 29201

The above information on filing a request for a contested case hearing before the Administrative Law Court is provided as a courtesy; parties before the ALC are responsible for complying with all applicable requirements of the Court.



DEPARTMENT OF THE ARMY
SAVANNAH DISTRICT, CORPS OF ENGINEERS
100 W. OGLETHORPE AVENUE
SAVANNAH, GEORGIA 31401-3640

CESAS-DE

October 7, 2011

BY FACSIMILE TO 803-898-3393 AND BY EXPRESS MAIL

Clerk of the Board
Board of Health and Environmental Control
South Carolina Department of Health and Environmental Control (SC DHEC)
2600 Bull Street
Columbia, SC 29201

SUBJECT: Savannah Harbor Expansion Project (SHEP) – Request for Final Review of (1) SC DHEC's Proposed Denial of 401 Water Quality Certification and (2) SC DHEC's Proposed Objection to the Federal Consistency Determination Under the Coastal Zone Management Act

To the Clerk of the Board:

The U.S. Army Corps of Engineers (Corps) hereby files this Request for Final Review of the following proposed decisions (Request): (1) SC DHEC's (DHEC or the Department) proposed denial of 401 water quality certification, which was transmitted to the Corps by letter dated September 30, 2011 entitled "Notice of Department Decision – State Certification" and signed by Mr. Chuck Hightower (401 denial letter), and (2) DHEC's proposed objection to the Corps's Federal Consistency Determination under the Coastal Zone Management Act, which was transmitted to the Corps by separate letter also dated September 30, 2011 entitled "Savannah Harbor Expansion Project: SCDHEC-OCRM Coastal Zone Consistency Determination" and signed by Ms. Carolyn Boltin-Kelly (Coastal objection letter).

The Corps is filing this Request for both proposed decisions in accordance with (a) S.C. Code Ann. 44-1-60, (b) the Notice of Appeal Procedure attached to the 401 denial letter, (c) R.61-101.A.7, which provides that the coastal zone consistency determination shall be issued as a component of, and concurrently, with the water quality certification, and (d) R. 61-101.G.5, which provides that appeals of a water quality certification which include coastal zone consistency determination will be heard according to the procedures in R.61-101.G.

Because DHEC issued both proposed decisions on the same date, we assume DHEC intended to act consistent with these legal provisions.¹ While R.61-101 appears primarily geared toward

¹ The 401 denial letter is clearly stated to be a proposed or staff decision. While the Coastal objection letter does not use the same terminology, by operation of law, including R.61.101.A.7, it too must be considered a proposed or staff decision in order to provide the Corps with a right to request final review, especially since the previous Jan. 25 and Jan. 30, 2011 comment letters did not provide any notice of a right to request final review. (In addition, DHEC reserved all rights to supplement its Jan. 25 and Jan. 30, 2011 comments, and DHEC has since received and reviewed additional information from the Corps).

CESAS-DE

SUBJECT: SHEP – Request for Final Review of Proposed Decisions

Federal licenses and permits, the policy rationale and efficiencies underlying the concurrent assessment of water quality and coastal zone issues would apply with equal force here. In addition, the facts are identical and many of the issues are the same or interrelated. If, however, DHEC believes it is not able to entertain this Request for combined review of the two proposed decisions, the Corps requests that this filing be processed both as a separate request for final review as to the 401 water quality certification and as a notice of intent to appeal the coastal zone proposed decision pursuant to the Policies and Procedures of Chapter V of the South Carolina Coastal Management Program (which requires forwarding to a review panel).

Before addressing the specific grounds for this Request, the Corps would like to make the following positions clear.

First, this is a request for a final review conference only – made for the purpose of obtaining final Department decisions on both matters (the 401 denial letter states that it is a “staff decision” and that the Department “proposes to deny;” see also S.C. Code Ann. 44-1-60(C)). The Corps does not intend to request a contested case (adjudicatory) hearing for either decision (regardless of the outcome of the final review conference). As a federal agency, the Corps is not legally required to submit to State quasi-judicial or judicial appellate processes.

Second, consistent with its own regulations, the Corps routinely seeks State water quality certification and coastal zone consistency determinations (when applicable) for Federal projects. There are statutory provisions that may exempt a project from State 401 certification where a State refusal to certify impairs interstate navigation or where water quality is thoroughly addressed in an EIS submitted to Congress, and that allow the project to proceed upon a Federal determination of consistency with coastal zone requirements. However, the Corps has made, and will continue to make, every effort to assure that the project fully assesses, avoids or minimizes environmental impacts, and that remaining impacts are fully compensated. Seeking certification at the State level has been a part of that effort, including this request for final review. In the event of a State denial or the inclusion of unreasonable conditions, the Corps expressly reserves the right to proceed based on a Federal exemption and/or determination. However, the Corps would prefer to obtain favorable concurrences from South Carolina.

Grounds for Review and Specific Changes Sought

I. Water Quality Certification

The Corps is requesting that the Department make a final decision issuing a water quality certification for the SHEP selected plan and associated mitigation. A detailed statement of the grounds upon which the proposed decision is challenged is provided in Enclosure A attached hereto. The Corps reserves the right to present additional information, documents, and argument for consideration as appropriate.

CESAS-DE

SUBJECT: SHEP – Request for Final Review of Proposed Decisions


II. Objection to Coastal Zone Consistency Determination

The Corps is requesting that the Department make a final decision finding that the SHEP selected plan and associated mitigation is consistent with South Carolina's coastal management plan and concurring with the Corps' Federal Consistency Determination for South Carolina (found in the Draft Tier I Environmental Impact Statement, Appx. J). A detailed statement of the grounds upon which the proposed decision is challenged is provided in Enclosure B attached hereto. The Corps reserves the right to present additional information, documents, and argument for consideration as appropriate.

Procedural

We are separately mailing today a check for \$100 to cover the filing fee for this Request. Please return a file-stamped copy of this filing to Mr. William Bailey, Chief of Planning, Savannah District, US Army Corps of Engineers, 100 W. Oglethorpe Ave, Savannah, GA 31401-3640. Mr. Bailey will be this office's point of contact on this matter at (912) 652-5781. We request the final review conference be scheduled within thirty days from the date of this filing, and in no event later than sixty days from the date of this filing as required by S.C. Code Ann. 44-1-60(F). Finally, the Corps is willing to engage in additional discussions with DHEC in an attempt to settle these matters before any final review conference as appropriate.

Respectfully submitted,


JEFFREY M. HALL
Colonel, US Army
Commanding

Enclosures

Enclosure A

Water Quality Certification

As stated in the cover letter, the Corps is filing this statement of the grounds upon which DHEC's proposed decision to deny 401 water quality certification is challenged. This statement provides a point-by-point response to each of the substantive objections raised by DHEC in its proposed decision as set forth in DHEC's September 30, 2011 letter, Staff Assessment, Section VI, Conclusion on Water Quality Impacts and Classified Uses, pages 7-10.

Specific Responses to DHEC Staff Assessment Objections to 401 Certification:

1. **OBJECTION:** Mechanical failure of the [dissolved oxygen] system would cause significant degradation to aquatic life within the estuary, and limit ability of the river to accept and assimilate pollutants. The Department does not have reasonable assurance that the increased DO deficit caused by the channel deepening will be adequately mitigated by the oxygen injection system. Staff Assessment, at 8.

RESPONSE: The Savannah Harbor Expansion Project includes a Monitoring and Adaptive Management Plan (Appendix D of EIS) that provides the Department with the assurance it seeks on this issue. After construction of the oxygen injection systems, the Corps will monitor their performance and D.O. levels throughout the harbor. Those actions ensure SC DHEC, the other natural resource agencies, and the public will be able to confirm that the oxygen injection systems are performing as intended. If the monitoring indicates that they are not, the Adaptive Management Plan provides a mechanism for the Corps to modify and/or adjust those systems so that they provide their intended function -- which is to remove the adverse effects on D.O. that harbor deepening could cause. The Adaptive Management Plan describes how the Corps would coordinate the monitoring results with the natural resource agencies to identify if/when modification and/or adjustment of the mitigation features are warranted. The Corps believes that the combination of the Monitoring and Adaptive Management Plan provides assurance that the oxygen injection systems will adequately mitigate the project's effects on dissolved oxygen.

2. **OBJECTION:** According to correspondence from the Corps dated September 12, 2011, the long term operating and maintenance costs associated with the DO injection system are \$1.2 million annually. These costs will be added to their normal funding requests. This system is a very costly method to mitigate for the projected impacts, and the funding for the long-term operational costs depends on unpredictable annual appropriations. Staff Assessment, at 8.

RESPONSE: The Corps will add the funding needed to operate and maintain the oxygen injection systems to its annual request for funds to operate and maintain the harbor. The Corps cannot guarantee the amount that a future Congress may appropriate in a given year to operate and maintain the Savannah Harbor Navigation Project, but to comply with a provision of the Georgia water quality certification, the Corps has committed to operating the oxygen injection system each year that it receives funds from Congress to operate and maintain the Savannah Harbor Navigation Project. Since operation of the oxygen injection

system is a condition of the Georgia water quality certification and will be a condition of the Corps' Record of Decision (NEPA compliance), we believe that the Department can be reasonably certain the Corps would operate the system in the future. We believe these provide similar certainty (of continued operation of mitigation features) to that obtained through certifications and permits approved by the Department for private individuals and corporations.

3. **OBJECTION:** When considering the Department's concerns about the use of mechanical means with questionable funding to permanently maintain oxygen levels in the waterbody, the Department cannot certify that there is reasonable assurance that project will not violate applicable water quality standards. Staff Assessment, at 8.

RESPONSE: We believe that the previous two responses provide reasonable assurance that the oxygen injection systems will adequately mitigate the project's effects on dissolved oxygen and will be operated in the future.

4. **OBJECTION:** The Department is concerned about the precedent set by allowing the Corps to take restoration credit for wetlands that are included in the project impacts. In addition, the Corps has proposed no method of preservation for the wetlands for which restoration credit is being taken. This leaves the entire 1,068 acres of restored brackish marsh unprotected from threat due to any future harbor expansion activities. Without the credit from the brackish marsh restoration area, there is a large deficit in the amount of mitigation credit that will be provided for this project. In order to comply with the provisions in Section F of Regulation 61-10 I, the Department must require appropriate mitigation to ensure that functions and values in the ecosystem will be protected. Staff Assessment, at 8.

RESPONSE: The Corps took restoration credit for wetlands that are included in the project impact analysis in response to Federal requirements to incrementally justify the costs of each project feature. In addition, natural resource agencies (such as SC DHEC) requested the Corps evaluate the project's potential impacts if no mitigation were performed and with the proposed mitigation measures. The Corps claimed restoration credit for the effects of the mitigation measures as a way of showing the beneficial effects of those features and identifying when additional mitigation may still be needed. The Corps used the results of that analysis to determine that additional wetland mitigation would be needed, and included acquisition and preservation of freshwater wetlands as another mitigation feature of the project. The USFWS sought the views of the state natural resource agencies (such as SC DNR) before approving the Corps' proposed wetland mitigation plan in their March 2011 Final Fish and Wildlife Coordination Act Report.

5. **OBJECTION:** Even though the vegetative shift that will occur from the change in salinity is minimal, there will be some loss to the habitat functions within the large area of converted salt marsh. This plan is not consistent with the state's regulatory obligation to protect existing uses in the ecosystem. The plan does not adequately compensate for all of the wetland impacts, nor does the plan meet the requirements of Regulation 61-101. Lack of appropriate mitigation means that functions within the ecosystem will be eliminated or impaired by the proposed activity. Allowing the Corps to take mitigation credit for the project impacts would

also limit the Department's ability to evaluate mitigation proposals on any such future project. Staff Assessment, at 9.

RESPONSE: The Corps developed its mitigation plans through Interagency Coordination Teams, of which SC DHEC and SC DNR were members. As a group, the Wetland Interagency Coordination Team identified tidal freshwater wetlands as being the most ecologically valuable type of wetland in the Savannah River estuary. An EPA team member suggested that Savannah District use its Regulatory Standard Operating Procedures (SOP) to quantify the mitigation that may be needed after the flow rerouting components of the mitigation plan are included. That SOP is very similar to one regularly used by the Corps' Charleston District and SC natural resource agencies when they evaluate Section 404 permits for proposed private projects in SC that may adversely impact wetlands. Savannah District used the methodology in that SOP to consider both the adverse and beneficial aspects of the proposed project on freshwater wetlands, brackish marsh and saltmarsh. Since the SOP calculations include all wetland types, the Corps believes the resulting mitigation plan adequately compensates for all of the salinity-induced wetland impacts. No wetland function would be eliminated as a result of changes in salinity. Adverse effects from the converting one wetland type to another (freshwater to brackish, or saltmarsh to brackish marsh) would be compensated through the acquisition and preservation of tracts that the USFWS has identified as ecologically valuable within the estuary.

6. **OBJECTION:** Since the Department does not have concurrence from the NMFS on the project impacts and proposed mitigation, it would be impossible to completely evaluate any adverse effects on sturgeon. Regulation 61-101 states in Section F.(5)(c) that certification will be denied if the project adversely impacts waters containing State or Federally recognized rare, threatened, or endangered species. Therefore, the Department cannot certify that the project will not adversely impact waters containing endangered species without concurrence from the NMFS. Staff Assessment, at 9.

RESPONSE: The Corps is continuing to coordinate with the NMFS on this issue and expects to receive a "no jeopardy" opinion from NMFS. If the Department cannot reach its own assessment of whether the project will unacceptably impact shortnose sturgeon, it could condition its water quality certification upon the Corps successfully obtaining concurrence from NMFS on this issue.

7. **OBJECTION:** The Department's ability to certify the proposed activity has also been compromised by the alternatives analysis included in the draft EIS. Regulation 61-101 Section F.(5)(b) states that certification will be denied if there is a feasible alternative to the activity which reduces adverse consequences on water quality and classified water uses. By limiting the project purpose, the Corps may have excluded from consideration some feasible alternatives; therefore, the Department cannot certify that there are no feasible alternatives to the proposed activity. Staff Assessment, at 9.

RESPONSE: The Corps evaluated several potential alternatives to this project. Appendix O of the EIS contained a description of that evaluation, including consideration of a new container terminal in Jasper County. Construction of a new container terminal in Jasper

County and deepening to that site was found to more costly than deepening to the GPA's existing container terminal. The non-structural and other structural means of addressing the present navigation problems in the harbor were all found to be less effective from a combined cost and environmental impact perspective. The Department's staff suggests that the project purpose may exclude some alternatives. However, the 1999 Congressional authorization of the Savannah Harbor Expansion Project effectively limited the scope of the evaluation. The Corps believes that its examination of navigation problems that are being experienced in the harbor is a reasonable response to the Congressional authorization. Neither the Corps nor SC DHEC could identify another feasible alternative to the proposed activity.

8. **OBJECTION:** Regulation 61-101 Section F.(5) states that certification will be denied if the proposed activity permanently alters the aquatic ecosystem in the vicinity of the project such that its functions and values are eliminated or impaired. This section of the regulation also states that certification will be denied if the proposed activity adversely impacts waters containing State or Federally recognized rare, threatened or endangered species. For the proposed activity, the applicant has not given reasonable assurance that existing uses will not be further impaired or eliminated from the proposed activity, nor has the applicant shown conclusively that the activity will not adversely impact waters containing the Federally endangered Shortnose sturgeon. Additionally, the Department cannot certify that there are no feasible alternatives to the proposed project. Some alternatives may have been excluded from consideration due to the limited project purpose. This project does not meet the requirements for issuance of a Water Quality Certification pursuant to Section 401 of the Clean Water Act, 33 U.S.C. Section 1341, and the requirements of Regulation 61-101, Water Quality Certification. The proposed activity could result in significant degradation to the aquatic ecosystem or remove existing and classified uses of the Savannah River. Staff Assessment, at 9-10.

RESPONSE: The Corps disagrees that the proposed harbor deepening could result in significant degradation to the aquatic ecosystem or would remove existing and classified uses of the Savannah River. Through the over 10 years of coordination with the federal and state natural resource agencies on this project, the Corps has developed -- and last November proposed -- a plan that would increase the efficiency of moving goods through Savannah Harbor. That increased efficiency would be an economic benefit to shippers and consumers in the southeast, including South Carolina and Georgia. In their comments on the Draft EIS, EPA Region 4 -- who approved SC DHEC's administration of water quality certifications under the Clean Water Act -- did not express concern about any potential failure of the project to comply with the Clean Water Act. EPA stated "After extensive interpretation of DO hydrodynamic modeling data, EPA finds that project DO depletions can be reasonably restored to pre-project conditions and evenly distributed within the affected river reaches using Speece Cones for direct oxygen injection into the River. ... EPA's conclusion concerning the sufficiency of the proposed DO mitigation focuses on a water quality perspective to ensure that pre-project DO levels are maintained." The Corps believes that the proposed project (with its mitigation features) would not significantly degrade the aquatic ecosystem or remove existing and classified uses of the Savannah River.

Conclusion

The Savannah Harbor Expansion Project with its comprehensive mitigation meets the certification requirements of Section 401 of the Clean Water Act as implemented by South Carolina. The Corps has adequately addressed all of the objections (concerns) raised by DHEC staff. For these reasons the Corps's application for water quality certification should be granted. The Corps reserves the right to submit additional documentation and argument as appropriate during the final review process.

Enclosure B**Coastal Zone Consistency Determination**

As stated in the cover letter, the Corps is filing this statement of the grounds upon which DHEC's proposed decision to object to the Corps's Federal Consistency Determination under the Coastal Zone Management Act is challenged. The objections of SCDHEC-OCRM were delineated in letters dated January 25, 2011 and January 31, 2011. In section A below, this statement provides a point-by-point response to each of the substantive objections raised by DHEC in those letters, demonstrating that SHEP complies with the Coastal Zone Management Act (CZMA), as it is fully consistent with the enforceable policies of the South Carolina Coastal Management Plan (SCCMP). In Sections B and C, below, the Corps provides a critique of several important omissions from the SCDEHC-OCRM January 25, 2011 consistency review. In Section D, below, the Corps explains additional coordination and information provided to SCDEHC-OCRM after the January 25 and 31, 2011 letters. That information, incorporated herein by reference, provides additional justification supporting this request for final review.

A. Responses to SCDHEC-OCRM Objections:

By letter dated March 30, 2011 the Corps responded to all of the objections proffered by SCDHEC-OCRM in its letters of January 25, 2011 and January 31, 2011. The Corps believes those responses adequately addressed the objections raised by SCDHEC-OCRM, however updated responses are provided as follows:

1. **OBJECTION:** SCDHEC-OCRM's January 25, 2011 letter raised concerns about the time period allowed for comments. *Letter from SCDHEC-OCRM dated January 25, 2011 at 1.*

RESPONSE: Based on events, there is no issue concerning time to comment. After numerous requests, the Corps extended the Draft EIS public comment period until January 25, 2011. The Corps received some comments even after that deadline, and they were accepted and considered in the Final EIS preparation. SCDHEC-OCRM submitted another comment letter on January 31, 2011 which was accepted and considered. On March 20, 2011, the Corps sent a letter to SCDHEC-OCRM responding to points raised in the SCDHEC-OCRM January 25 and 31, 2011 letters. As noted in more detail below, there was then further dialogue between the agencies and additional explanatory information was provided by the Corps to SCDHEC-OCRM. On May 27, 2011, SCDHEC-OCRM sent a letter replying to the Corps's March 20, 2011 letter. Thus, SCDHEC-OCRM had ample opportunity to make additional comments even after January 31, 2011. SCDHEC-OCRM's September 30, 2011 proposed decision contained no further substantive comments, and simply stated that SCDHEC-OCRM "stands by its January 25 and 31, 2011 letters."

2. **OBJECTION:** As an initial matter, as the Federal Consistency Determination points out, the Coastal Zone Management Act, 16 U.S.C. §§ 1451, *et seq.*, requires that "Each federal agency activity within or outside the coastal zone that affects any land or water use or natural resource of the coastal zone shall be carried out in a manner which is consistent to the maximum extent practicable with the enforceable policies of approved state management programs." 16 U.S.C. § 1456(c)(1)(A). "Consistent to the maximum extent feasible" is defined in the

Regulations promulgated by the Secretary of Commerce and means “fully consistent with the enforceable policies of management programs unless full consistency is prohibited by existing law applicable to the Federal Agency.” 15 C.F.R. § 930.32(a)(1). The Regulations further provide that “if a Federal agency asserts that full consistency with the management program is prohibited, it shall clearly describe, in writing, to the State agency the statutory provisions, legislative history, or other legal authority which limits the Federal agency’s discretion to be fully consistent with the enforceable policies of the management program.” 15 C.F.R. 930.32(a)(2). Here, the Federal Agency has not identified in writing to the state agency any existing law which prohibits full consistency with South Carolina’s approved management program. Therefore, because the federal agency has not identified to the state agency any existing laws which prohibit full consistency, the Coastal Zone Management Act’s requirement that the federal agency activity be consistent to the maximum extent practicable requires that the Federal agency activity be fully consistent with South Carolina’s approved management program. *Letter from SCDHEC-OCRM dated January 25, 2011 at 2-3.*

RESPONSE: Under the Coastal Zone Management Act, the SHEP must be consistent with South Carolina’s approved Coastal Zone Management Program (the South Carolina Coastal Management Program or SCCMP) to the maximum extent practicable, and that standard is met. However, the Corps’s Federal Consistency Determination (FCD) (DEIS, Appx. J) further demonstrates and confirms that the project with its associated mitigation is also fully consistent with the enforceable provisions of South Carolina’s approved Coastal Zone Management Plan (SCCMP). This determination is fully supported by the proposed mitigation features [Mitigation and Monitoring and Adaptive Management Plans] which would protect the resources of the State of South Carolina’s coastal zone as mandated by regulation.

3. **OBJECTION:** The project as proposed will not restore or enhance the resources of the state but will result in a degradation of coastal resources. *Letter from SCDHEC-OCRM dated January 25, 2011 at 3.*

RESPONSE: SHEP clearly meets the primary criterion of protecting the State’s coastal resources, even if it may not restore/enhance all of the environmental resources of the State’s coastal zone. It is doubtful that many of the landscape development projects that SCDHEC-OCRM reviews and approves meet the secondary restore and enhance criterion. SCDHEC-OCRM’s letter regarding the guidelines for evaluating all projects states the applicable criteria as follows: “The extent to which the project will further the policies of the State of South General Assembly which are mandated for OCRM in implementation of its program these being: (b) to protect and where possible, to restore and enhance the resources of the State’s coastal zone for this and succeeding generations.” The SHEP meets the protection criterion since the project’s design was repeatedly modified to minimize adverse impacts as well as include features to mitigate for unavoidable effects. The Monitoring and Adaptive Management Plans detail the measures which will be implemented to protect the sensitive resources of coastal South Carolina.

4. **OBJECTION:** The project as proposed will reduce dissolved oxygen, and depends on mechanical means in an attempt to maintain current levels. This causes a net loss of degraded fisheries habitat. *Letter from SCDHEC-OCRM dated January 25, 2011 at 3.*

RESPONSE: The impacts of the SHEP on the dissolved oxygen regime in the Savannah Harbor estuary are discussed in the EIS and in greater detail in the Engineering Appendix of the GRR.

Based on the potential impacts to dissolved oxygen that would be caused by implementation of the SHEP, the project's mitigation plan includes an oxygen injection system. This system has been designed to remove the incremental impacts of the SHEP on the dissolved oxygen regime in the harbor. Due to the spacing of the system, the dissolved oxygen regime would be improved in over 90 percent of the estuary, when compared to existing conditions. The mitigation plan also includes various flow re-routing features in McCoy's Cut, Middle River, and Back River to supply that portion of the estuary with additional freshwater to reduce salinity levels. The project also includes features in the lower end of both Middle and Back River to reduce the amount of saltwater that would move up those tidal streams.

Even with the injection of oxygen and the flow diversion features of the mitigation plan, there would still be residual impacts to Shortnose sturgeon and Striped bass habitat. The Fisheries Interagency Coordination Team (of which SC DNR was a member) could not identify any mitigation features in the estuary that would be effective in replacing those lost habitats over the full range of river flow conditions. The team determined that annual funding for stocking Striped bass fingerlings and constructing a fish bypass to expand Shortnose sturgeon spawning habitat would be appropriate mitigation for their loss of habitat. The SHEP is fully consistent with this part of the South Carolina Coastal Zone Management Plan because the project provides adequate mitigation to offset its adverse effects. Additionally, implementation of the Monitoring and Adaptive Management Plan would ensure that the "critical areas" (coastal waters, tidelands) of South Carolina are protected after construction of the project is completed.

5. **OBJECTION:** The proposed dredging to deepen the Savannah Harbor as set forth in the National Economic Development (NED) Plan, 47-foot Depth Alternative, and the Locally Preferred (LP) Plan, 48-foot Depth Alternative, will reduce the dissolved oxygen levels in the Savannah River from the existing state in an area utilized for spawning of important fisheries species including striped bass and shortnose sturgeon (SNS). Mitigation for this impact is to stock bass fingerlings provided by Georgia DNR and construction of a fishway for Shortnose Sturgeon at the New Savannah Bluff Lock & Dam at Augusta Georgia. Stocking of fingerlings does not eliminate impacts to spawning and nursery areas for the Striped Bass and the construction of a fishway does not assure the Shortnose Sturgeon will be able to use it. In the event low DO (Dissolved Oxygen) levels fall below current concentrations, as predicted in the DEIS, the lower part of the river may not be passable by adult or juvenile sturgeon. The shallower dredging alternatives are more desirable to both the NED and LP alternatives, however all dredging alternatives (with or without mitigation) result in a net loss of Striper and SNS habitat. *Letter from SCDHEC-OCRM dated January 25, 2011 at 3.*

RESPONSE: Shortnose sturgeon do not spawn in the estuary, but upstream in the Savannah River well outside the project effect's area. Low dissolved oxygen levels are not a concern in these upstream habitats during the spring spawning season for this species.

The Fisheries Interagency Coordination Team (of which SC DNR was a member) identified conditions to differentiate between areas that serve as suitable and unsuitable spawning habitats for Striped Bass. Dissolved oxygen levels were included in the criteria of suitable habitat for Striped Bass. The project's mitigation plan includes an oxygen injection system. The system has been designed to remove the incremental impacts of the SHEP on the dissolved oxygen

regime in the harbor. Due to the spacing of the system, the dissolved oxygen regime would be improved in over 90 percent of the estuary, when compared to existing conditions.

As a result, the SHEP is fully consistent with the South Carolina Coastal Zone Management Plan in that it includes effective measures to protect and maintain water quality and provides adequate offsetting mitigation for significant adverse effects. Additionally, implementation of the Monitoring and Adaptive Management Plan would ensure that important fisheries species of South Carolina are protected during and after construction of the project.

The SHEP's mitigation does not eliminate the impacts to Striped bass spawning habitat. However, when it is not possible to avoid an impact, mitigation is used to compensate. This objective would be realized via annual stocking of Striped bass fingerlings which will ensure the continued health and viability of this fishery in the lower Savannah River.

Construction of a fish bypass at New Savannah Bluff Lock and Dam will expand the Shortnose sturgeon's spawning habitat. The adverse impacts of reservoir and other construction which blocked sturgeon's access to historical upriver spawning areas are well-documented. Once constructed, Shortnose sturgeon use of the fish way would be monitored to determine its effectiveness. Adaptive Management funds would be available to modify the structure if the monitoring indicates that is required. Other anadromous species (American shad, Atlantic sturgeon, etc.) are also likely to benefit from the fish way. Successful fish passage at New Savannah Bluff Lock and Dam would result in fish passage structures being installed at the Augusta Diversion and Stevens Creek Dams, which will allow access to even more spawning habitat for anadromous fish. Restoring access to the traditional spawning habitat above the New Savannah Bluff Lock and Dam has been a high priority of NOAA Fisheries, US Fish and Wildlife Service, and SC DNR.

Since the proposed dissolved oxygen system would restore (and marginally increase) dissolved oxygen levels in the estuary, there is no indication from the hydrodynamic and water quality model studies that the Shortnose sturgeon would not be able to use the lower reaches of the Savannah River from the standpoint of dissolved oxygen after harbor deepening.

SCDHEC-OCRM's preference for the project alternatives less than the 47-foot [or 48-foot] depth is acknowledged. Further, it is correct that some impacts to Striped bass and Shortnose sturgeon would remain despite extensive changes to the harbor deepening design and development of a comprehensive mitigation plan. Appendix C details why these apparent shortcomings are not significant.

6. **OBJECTION:** Models described in the EIS indicate impacts to large areas of freshwater marshlands including important habitat for fish, wading birds, and waterfowl. While efforts have been addressed to minimize impacts, a minimum of 337 acres of freshwater marsh will be affected by salt waters. Mitigation for this impact is to preserve additional wetlands adjacent to the Savannah River National Wildlife Refuge. Preservation does not replace the lost values and functions of the impacted freshwater marsh. *Letter from SCDHEC-OCRM dated January 25, 2011 at 4.*

RESPONSE: With the exception of the 44-foot alternative, all channel depths evaluated in the SHEP would affect some of the tidal freshwater marshes (via increased salinity levels) located in the estuary. This would be the case irrespective of the proposed mitigation features (flow rerouting). However, the SHEP would not result in the actual destruction [or even degradation] of these marshes. Instead, an increase in upstream salinity levels would cause areas of tidal freshwater marsh (up to 337 acres with the 48-foot project) to transition into a brackish marsh community. Nonetheless, many of the emergent plant species associated with the tidal freshwater marsh communities would still flourish after project implementation. In fact, emergent plant species often associated with freshwater plant communities are readily observed in environments that have been defined as brackish marsh (Latham et. al., 1994).

Although the composition of tidal freshwater marshes would change with brackish marsh species becoming more prevalent, the basic wetland functions associated with these plant communities would not be materially transformed. A comparison of potential changes in wetland function after conversion of freshwater wetlands to brackish wetlands (shown in the following table) reveals there are only negligible alteration to functions such as water purification, flood protection, shoreline stabilization, groundwater recharge, stream flow maintenance, retention of particles, surface water storage, subsurface storage, nutrient cycling, and values to society.

Changes in Wetland Function as a Result of Wetland Conversion

Elements of Wetland Function	Freshwater to Brackish Marsh (Approximately 337 acres)	Saltmarsh to Brackish Marsh (Approximately 730 acres)
Water Purification	Negligible	Negligible
Flood Protection	Negligible	Negligible
Shoreline Stabilization	Negligible	Negligible
Groundwater Recharge	Negligible	Negligible
Stream flow Maintenance	Negligible	Negligible
Retention of Particles	Negligible	Negligible
Surface Water Storage	Negligible	Negligible
Subsurface Storage	Negligible	Negligible
Nutrient Cycling	Negligible	Negligible
Values to Society	Negligible	Negligible
Fish and Wildlife Habitat	Minor Adverse	Negligible

Likewise, the 48-foot depth would have a similar effect on 730 acres of saltmarsh which would also change through time into a brackish marsh. Dominant saltmarsh species like Spartina alterniflora would still be observed in areas which have salinities that define a brackish marsh. However, the overall basic wetland functions typically associated with these systems would not change. A comparison of potential changes in elements of wetland function for both conversion scenarios is shown in the table below.

As illustrated in the table, the only indirect effect the 48-foot project would have on the function of these wetlands systems would be associated with fish and wildlife habitat. All other elements

of wetland function associated with predicted shifts in wetlands categorization would be negligible as a result of the anticipated salinity changes. It should be noted that areas of the Savannah Harbor identified as saltmarsh or brackish marsh support similar fish and wildlife species (Jennings, 2003). Any anticipated conversion of saltmarsh to a brackish marsh system would have a negligible impact on the overall function of the wetland system. The Corps recognizes that a comparison of fish and wildlife habitat between freshwater and brackish marsh systems yields fewer similarities. However, the conversion in fish and wildlife habitat would still be minor when considering the total function of the wetland and continued existence of some freshwater vegetation after deepening in wetland areas that would be viewed as brackish marsh.

The Wetlands Interagency Coordination Team (which included a representative of the South Carolina Department of Natural Resources) concluded that there were no opportunities either to restore or create substantial acreages of tidal freshwater marsh in the estuary. Consequently, preservation of lands that are ecologically valuable and add to the purposes of the Savannah National Wildlife Refuge was identified as appropriate mitigation for the remaining wetland impacts. These would be properties already identified in the Savannah National Wildlife Refuge Acquisition Plan. Vegetation-wise they consist of bottomland hardwoods, maritime forest, and uplands dominated by deciduous forest and re-growth. The bottom land hardwoods are classified as palustrine forested, broad-leaved deciduous communities that are both temporarily and seasonally flooded. Preserving these areas would ensure their wildlife habitat value is protected in perpetuity. It was the consensus of the team that acquisition/preservation of these lands would serve as mitigation for reducing the only wetland function (fish and wildlife habitat value of freshwater marsh) materially changed by SHEP. It is important to observe that the subject conversion impacts to tidal freshwater marsh would only occur in the State of Georgia. With the flow diversion measures in place, the amount of tidal freshwater marsh in South Carolina should increase along the Little Back River in the vicinity of the Savannah National Wildlife Refuge.

The proposed preservation parcel[s] to mitigate for the above vegetative changes consist of 2,683 acres of bottomland hardwoods, maritime forest and uplands dominated by deciduous forest and re-growth. The bottomland hardwoods are classified as palustrine, forested, broad-leaved deciduous systems that are both temporarily and seasonally flooded. Preserving these areas would ensure wildlife habitat is protected in perpetuity. Moreover, the additional lands would buffer the SNWR from future threats of development such that changes in land use would not occur immediately adjacent to existing areas of the Refuge that do contain emergent wetland characteristics. Thus, the acquisition and preservation of 2,683 acres of wetland and upland buffer provides a functional replacement for the conversion of the only wetland function (i.e., fish and wildlife habitat) that would be expected as a result of the 337 acre freshwater to brackish marsh conversion (See table above). Thus, the functional assessment conducted for all wetland areas proposed for impact and mitigation satisfies the intent of the no-net-loss criterion.

The Corps made use of a Wetland Interagency Coordination Team (ICT) [consisting of technical expert representatives from USACE, Federal natural resource agencies, and State natural resource agencies representatives] to identify acceptable mitigation for the proposed project. At that time, USFWS stated that mitigation actions must be performed within the basin for impacts

to the SNWR wetlands. The Service recommended preservation as a possible solution and proposed sites that are part of its long-term acquisition strategy to compliment the SNWR. The Corps also consulted with the Stakeholder Evaluation Group, including its Non-governmental Organizations (NGOs) members, to identify any other suitable mitigation alternatives. Over the ten-year study period, no agency or organization could identify another feasible alternative as mitigation for impacts that would occur as a result of wetland conversion. Therefore, the Corps proceeded with the identification of preservation sites.

7. **OBJECTION:** This project will result in a very large volume of spoils that will use significant areas within the existing spoils disposal sites, located mostly in Jasper County, resulting in shorter life expectancy of the CDF (Contained Disposal Facility). This may result in the need for additional wetland impacts for expansion of the CDF in Jasper County. Additional impacts from existing port expansions, storage, and transportation facilities associated with the port will likely result in additional impacts to wetlands and water quality. The proposed disposal of spoils in the CDF will potentially eliminate the possibility of a new port in Jasper County. *Letter from SCDHEC-OCRM dated January 25, 2011 at 4.*

RESPONSE: The CDFs bordering Savannah Harbor [including those in South Carolina] are designated to receive sediment dredged from the Savannah Harbor Navigation Project. The environmental impacts associated with using these sites for dredged material disposal were addressed in the Long-Term Management Strategy EIS completed in 1996. Although the US Government does not own these sites in fee, the Corps of Engineers maintains easements to permit deposition of dredged sediments. These diked CDFs have been used for dredged material disposal for many years. Their continued use for disposal is considered the least environmentally damaging option for sediment placement in Savannah Harbor. When the perimeter dikes are raised, the existing CDFs could be used beyond the 50-year project evaluation period. Using the existing CDFs for new work material excavated during harbor deepening would not markedly decrease their useful life or lead to an earlier need to locate any new CDFs.

The Georgia Department of Transportation has requested that the Corps relinquish its sediment disposal rights for Disposal Areas 14A and 14B, the sites presently being considered for a container terminal in Jasper County. The Corps is providing technical information to the Joint Project Office to identify a disposal site to replace this lost capacity for Savannah Harbor, as well as a means to replace the existing mitigation features [from previous projects] located within those Areas. The Corps has advised GA DOT and the Joint Project Office that it would not release the disposal easements until development of a Jasper Container Terminal is imminent, i.e. the developer obtains a Section 404 permit. The JPO's consultant observed that placing new work sediments on Areas 14A and 14B would save the terminal development project over \$200 million by raising its elevation to a workable height. Therefore, if SHEP is constructed, it would benefit the development of a container terminal in Jasper County by significantly reducing its initial construction costs.

8. **OBJECTION:** The proposed project will impact habitat for the federally endangered Shortnose Sturgeon. Endangered species habitat is considered GAPC in the SCCZMP. Mitigation offered to offset this impact is to construct a fishway at the New Savannah Bluff Lock & Dam. There is no certainty that the sturgeon will use this structure or that it will have any

effect on spawning or survival of this species. Additionally, the project proposes a net loss of SNS habitat. *Letter from SCDHEC-OCRM dated January 25, 2011 at 4.*

RESPONSE: The Monitoring and Adaptive Management Plan contain provisions to monitor the success of the proposed fish bypass at the New Savannah Bluff Lock and Dam in passing Shortnose sturgeon. The structure was specifically designed to accommodate passage of this species to its historic upstream spawning habitats. Consultation with relevant natural resource agencies was conducted to ensure a state of the art design for the structure. Other than removal of the dam, none could identify a better design for the conditions at this site. During the plans and specifications phase of the project, the Corps will consult with the resource agencies again to finalize the design. The Adaptive Management Plan includes funds to modify the fish way in the future if that proves necessary.

9. **OBJECTION:** This project will have a significant impact on Striped Bass and Shortnose Sturgeon. Mitigation of these impacts is dependent on mechanical means (oxygen injection and release of fingerlings) that has not been adequately demonstrated to reduce or eliminate the impacts to water quality and fish survival. *Letter from SCDHEC-OCRM dated January 25, 2011 at 4.*

RESPONSE: The proposed DO system employs technology widely used in industrial settings. This long-term use has demonstrated its effectiveness in adding dissolved oxygen to all volumes of water. The Monitoring and Adaptive Mitigation Plan provide for ten years of post-construction monitoring to determine the efficiency/effectiveness of the oxygen injection system. The adaptive management plan provides the means to make any required modification to the oxygen injection system. Harbor deepening would adversely affect habitat of Shortnose sturgeon and Striped bass in the estuary. As noted above repeatedly, the proposed measures of mitigating for those impacts were deemed appropriate/acceptable by the Fisheries Interagency Coordination Team, of which SC DNR was a member. The survival of stocked Striped bass fingerlings in the Savannah River Estuary has been well documented by researchers from the University of Georgia.

10. **OBJECTION:** The project as proposed will impact dissolved oxygen concentrations and finfish production. However, the DEIS states mitigation will result in a minimal net improvement. SCDHEC-OCRM believes the use of mechanical oxygen injection systems may not be adequate to maintain current DO levels. Additionally, the Department has concerns regarding the maintenance and long term viability of these systems. *Letter from SCDHEC-OCRM dated January 25, 2011 at 5.*

RESPONSE: Each of the proposed harbor deepening alternatives includes a dissolved oxygen improvement system to mitigate its adverse DO effects. The Corps' projections for dissolved oxygen levels in the harbor and the project's impacts to those levels are based on the hydrodynamic and water quality models that SCDHEC approved for the Corps to use on this project. EPA used a variation of those models in development in its April 2010 the Draft Revised Dissolved Oxygen TMDL for Savannah Harbor. It is our understanding that SCDHEC concurred in EPA's use of that model. The models that the Corps used to predict impacts to dissolved oxygen are the same ones it used to design the DO improvement systems. The predictions from the models should be as reliable for impact determinations as they are for mitigation design and effectiveness. Use of Speece Cone injection along with other mitigation

measures is expected to improve dissolved oxygen conditions in over 90 percent of the estuary compared to existing conditions. To ensure the DO systems function as intended, monitoring is a component of the post-construction commitments. The Corps intends to include operation of the mitigation features (including the DO systems) in the Record of Decision as a requirement for maintenance of the navigation channel.

11. **OBJECTION:** The project as proposed will effect Shortnose Sturgeon spawning, juvenile, and adult habitats. Additionally, SNS habitat will result in a net loss. *Letter from SCDHEC-OCRM dated January 25, 2011 at 5.*

RESPONSE: There would be a reduction in Shortnose sturgeon habitat in the estuary as a result of the project. However, the proposed fish bypass would provide access to additional upstream sturgeon spawning habitats which will more than compensate for the losses in the estuary.

12. **OBJECTION:** Adjoining lands owned by the state of South Carolina are currently identified as a potential site for a new ports facility. The use of this site for spoil disposal and maintenance dredge disposal will potentially eliminate the Jasper County location as a suitable location for the Ocean Terminal. *Letter from SCDHEC-OCRM dated January 25, 2011 at 5.*

RESPONSE: The Corps does not concur with the allegation that construction of the SHEP project effectively eliminates the Jasper County location as a candidate site for an ocean terminal. The Corps agrees with the engineering consultant to the Joint Project Office that placement of new work sediments on Areas 14A and 14B would reduce the terminal development costs by raising the site's elevation to a workable height. The Corps has advised GA DOT and the Joint Project Office that it would not release its disposal easements on the property until development of the Jasper Container Terminal is imminent, i.e. the developer obtains a Section 404 permit. In addition, local newspapers report the Joint Project Office agreeing that a terminal at Jasper would also require a navigation channel deeper than the present 42-foot depth.

13. **OBJECTION:** The proposed dredging to the depths chosen for the NED and the LP would greatly reduce habitat utilized by fisheries species, Striped Bass, as well as State and Federally listed endangered species, Shortnose Sturgeon. The shallower dredging alternatives are more desirable to both the NED and LP alternatives, however all dredging alternatives (with or without mitigation) result in a net loss of Striper and SNS habitat. *Letter from SCDHEC-OCRM dated January 25, 2011 at 5-6.*

RESPONSE: SDHEC-OCRM's preference for the project alternatives less than the 47-foot [or 48-foot] depth is acknowledged. Further, it is correct that some impacts to Striped bass and Shortnose sturgeon will remain [despite extensive changes to the harbor deepening design and development of a comprehensive mitigation plan]. Appendix C of the EIS describes the mitigation that would be performed to compensate for those remaining impacts.

14. **OBJECTION:** As proposed, the project will increase the salinities within the immediate and upstream areas, causing a significant impact to the freshwater marshes. *Letter from SCDHEC-OCRM dated January 25, 2011 at 6.*

RESPONSE: The EIS fully discusses the impacts of the SHEP on tidal freshwater marsh in the estuary. The project includes measures to minimize impacts to tidal freshwater marsh and compensate for those impacts that cannot be avoided.

15. **OBJECTION:** As proposed in the DEIS, the dredging under the NEP and LP plans would negatively impact areas utilized for spawning and early development of Striped Bass. The proposed mitigation for this impact by release of hatchery raised fingerlings by Georgia DNR; however this activity does not offset the spawning or loss of essential habitat. *Letter from SCDHEC-OCRM dated January 25, 2011 at 6.*

RESPONSE: The Fisheries Interagency Coordination Team (which included the SC DNR) agreed that annual stocking of fingerling Striped bass in the lower Savannah River would be an appropriate mitigation technique for the loss of an increment of its spawning, egg, and larvae habitat. The fingerlings would replace juvenile fish that might not reach this life cycle stage because of SHEP's impacts on their habitat. Historically, the GA DNR-WRD stocked this species in the estuary for similar reasons. The recent growth in the Savannah River Striped bass population indicates that stocking is effective in addressing many life cycle problems. In fact, annual stocking of fingerling Striped bass would ensure that this sport fishery continues to prosper.

16. **OBJECTION:** As proposed dredging under the NED and LP plans, the project will further degrade the existing water quality conditions. *Letter from SCDHEC-OCRM dated January 25, 2011 at 6.*

RESPONSE: The proposed project would not create stagnant water conditions, lethal fish entrapments, or deposit sumps. The use of Speece Cone injection along with other mitigation measures will improve dissolved oxygen conditions in over 90 percent of the estuary compared to existing conditions.

17. **OBJECTION:** The project proposes to utilize the deposition of these dredged materials to be placed into the Middle River, Rifle Cut, and the Little Back River; this deposition is for mitigating the predicted increase in salinity. *Letter from SCDHEC-OCRM dated January 25, 2011 at 6.*

RESPONSE: None of the material [rock, stone, and sandy sediments] used to construct the closure structures in McCoy's Cut and Rifle Cut, the sill in Middle River, and the flow diversion structure at McCoy's Cut to increase the flow of freshwater downstream or restrict the flow of saltwater upstream would be placed in wetland areas in SC. Rather, it would be placed in open water in Georgia. Materials used to construct the sill in Back River (in open water) would be deposited in ways that do not allow their dispersal into wetland area.

18. **OBJECTION:** The proposed deepening under the NED and LP plans result in a negative impact to areas of important resources for fisheries and wildlife. The shallower dredging alternatives are more desirable to both the NED and LP alternatives. Additionally, a demonstrated public need for the citizens of South Carolina has not been sufficiently demonstrated. Also, SCDHEC OCRM believes there may be other feasible alternatives that should be explored. *Letter from SCDHEC-OCRM dated January 25, 2011 at 6.*

RESPONSE: Navigation studies undertaken by the Corps evaluate the benefits of a proposed project from a national perspective and do not focus on an individual state [or even region] when selecting the National Economic Development Plan. The SHEP evaluated a full range of alternatives and determined that deepening of Savannah Harbor to allow vessels to use it without light loading and/or tidal constraints is in the national interest. The screening of potential management measures to address the identified navigation needs is contained in Appendix O of the EIS. The majority of the construction activities and the environmental impacts would occur within the State of Georgia.

19. **OBJECTION:** The measures proposed to mitigate for the predicted increase in salinity are to close Rifle Cut and Little Back River. These alterations would result in a loss of navigable waters by the public in these two water bodies. *Letter from SCDHEC-OCRM dated January 25, 2011 at 7.*

RESPONSE: The public would not lose access to navigable waters as a result of the proposed mitigation features. Closures would occur at Rifle Cut (a man-made passage in Georgia) and the western end of McCoys Cut (South Carolina). Both of these areas are within the Savannah National Wildlife Refuge and are not used by commercial traffic. Closing Rifle Cut would lengthen the transit of recreational boaters using the existing boat ramp at the Houlihan Bridge who travel to Back River. Constructing a new boat ramp on Hutchinson Island would provide more direct access to Back River for recreational boaters and addresses this issue (Appendix C- Figure 46). Chatham County would be given the ramp and operate the facility in perpetuity. The project does not include any closure structures on Little Back River.

20. **OBJECTION:** The project proposed to close off Rifle Cut and Little Back River to reduce the potential effects of increased salinity. This proposed activity would restrict the continued use of these water bodies as recreational open areas. The Department believes that other alternatives exist aside from the closure of Rifle Cut and Little Back River. *Letter from SCDHEC-OCRM dated January 25, 2011 at 7.*

RESPONSE: Extensive modeling of the Savannah Harbor was conducted to determine the most practicable means of avoiding/minimizing aquatic impacts to the maximum extent practicable while still achieving the project's purpose and need. Ultimately, implementation of flow routing measures proved to be the best way to achieve this objective [especially minimization of wetland impacts - see Appendix C]. Closing the western end of McCoys Cut is designed to bring more freshwater into Little Back and Middle Rivers while closing Rifle Cut would reduce the amount of salty water entering Little Back River via Middle River. Without the flow alteration structures, approximately 1,212 acres of freshwater marsh would be converted to brackish marsh by the 48-foot SHEP project. By implementing flow-routing measure 6A, only 337 acres of freshwater marsh would be similarly converted. Thus, flow routing measure 6A satisfies both avoidance and minimization elements by maintaining 875 acres of freshwater marsh that would otherwise experience some degree of vegetative succession. Waters in the vicinity of the flow diversion structures would still be available for recreational use.

21. **OBJECTION:** The project as proposed in the preferred LP alternative will impact 1212 acres of freshwater marsh through the introduction of more saline waters. While mitigation is proposed to offset these impacts, there are other feasible alternatives to further minimize the proposed impacts. All other dredging alternatives result in a net loss of freshwater wetlands and

saltmarsh, even with mitigation, except for the 44 foot dredge alternative. The 44 foot dredge alternative will result in the net gain of 332 acres of freshwater marsh due to the conversion of brackish wetlands. Additionally, there is no overriding public interest for the citizens of the State of South Carolina in this project. As proposed, all of the benefits from the deepening of the Savannah Harbor will be accrued to the State of Georgia, while the majority of the ecological impacts will occur within the State of South Carolina. *Letter from SCDHEC-OCRM dated January 25, 2011 at 7.*

RESPONSE: Navigation studies undertaken by the US Army Corps of Engineers evaluate the benefits of a proposed project from a national perspective and do not focus on an individual state [or even region] when selecting the National Economic Development Plan. The SHEP evaluated a full range of alternatives and determined that deepening of Savannah Harbor to allow vessels to use it without light loading and/or tidal constraints is in the national interest. The screening of potential management measures to address the identified navigation needs is contained in Appendix O of the EIS. The majority of the construction activities and the environmental impacts would occur within the State of Georgia.

22. **OBJECTION:** Several of the above cited policies require a demonstration of no feasible alternatives. The Federal Consistency Determination does not sufficiently demonstrate that there are no feasible alternatives. South Carolina's coastal zone management program defines "Feasible" as used in the Coastal Management Program in the context of "unless no feasible alternative exists." "Feasibility is determined by [DHEC OCRM] with respect to individual project proposals. Feasibility in each case is based on the best available information, including technical input from relevant agencies with expertise in the subject area, and considering factors of environmental, economic, social, legal, and technological suitability of the proposed activity and its alternatives. Use of this word includes the concept of reasonableness and likelihood of success in achieving the project goal or purpose. "Feasible alternative" applies both to locations or sites and to methods of design or construction, and includes the no action alternative." Here, the Federal Consistency Determination relies on its determination that adverse impacts will be mitigated. Though the CMP requires that unavoidable impacts be mitigated, there must first be a demonstration of no feasible alternatives/unavoidability. While the Federal Consistency Determination states that there are no feasible alternatives, it does so in a conclusory fashion and does not demonstrate why the other alternatives are not feasible. The Federal Consistency Determination does not consider other locations but only looks at methods for this location. In addition, its conclusion that the no action alternative and other alternatives are not feasible is conclusory and therefore is inadequate as a matter of law. *Letter from SCDHEC-OCRM dated January 25, 2011 at 8.*

RESPONSE: The SHEP was initiated based on a known problem – the larger vessels that use Savannah Harbor are constrained by draft because of the existing controlling depth of -42 feet mlw. Those vessels must either light load and/or wait for high tide to safely navigate the harbor. This situation will become even more of an issue once the larger Post-Panamax ships begin replacing older, smaller vessels. The screening of potential management measures to address the identified navigation needs is contained in Appendix O of the EIS. Based on problem identification, the SHEP looked at the benefits and associated environmental impacts of constructing a deeper harbor to either 44, 45, 46, 47, or 48 feet mlw. Increasing the controlling depth in Savannah Harbor is the best alternative to solve the identified problems. The

alternatives analysis in the Draft Environmental Impact Statement was performed in accordance with applicable law and is fully consistent with the SCCMP enforceable policies relating to alternatives.

23. **OBJECTION:** Based upon the above SCDHEC OCRM does not concur that the five dredging alternatives are consistent with the South Carolina Coastal Management Program (SCCMP) to the maximum extent practicable because it would result in the permanent alteration of productive freshwater marshlands, a net loss in spawning and juvenile habitat for Striped bass and SNS (T&E listed species) and degradation of water quality due to a reduction in dissolved oxygen. The DEIS has not adequately demonstrated that no feasible alternatives exist since other alternatives such as the potential location of the Jasper County Ocean Terminal were not considered. In addition, the DEIS fails to demonstrate an overriding public interest for the citizens of South Carolina. Again, it is DHEC's position that additional time remains to object to the federal agency's consistency determination, and reserves the right to supplement this letter accordingly. *Letter from SCDHEC-OCRM dated January 25, 2011 at 8.*

RESPONSE: As with any water resource development project having a landscape scope, the SHEP will have adverse impacts on the environment. Harbor deepening was evaluated from an impact and mitigation standpoint using the standard process which is (1) avoid impacts where possible (maintaining the existing side slopes of the channel to avoid additional wetland impacts), (2) minimize impacts that cannot be avoided (flow rerouting measures to reduce upstream salinity levels) and (3) compensate for the remaining impacts. Based on this evaluation process, the Mitigation and Monitoring and Adaptive Management Plan provide appropriate compensation for the remaining impacts of the project in regards to direct wetland impacts, indirect impacts to tidal freshwater marsh, dissolved oxygen, Striped bass, and Shortnose sturgeon. The mitigation measures for these resources have been discussed in previous responses.

The screening of potential management measures and development of alternatives to address Savannah's identified navigation needs are contained in Appendix O of the EIS. A port facility in Jasper County was one of the early alternative terminal locations that the Corps evaluated. The Corps found that deepening to the presently-proposed site and its subsequent development into a port facility was less cost effective than deepening up to the existing Garden City Terminal.

Navigation studies undertaken by the Corps evaluate the benefits of a proposed project from a national perspective and do not focus on an individual state [or even region] when selecting the National Economic Development Plan. The SHEP evaluated a full range of alternatives and determined that deepening of Savannah Harbor to allow vessels to use it without light loading and/or tidal constraints is in the national interest.

24. **OBJECTION:** The proposed project may potentially impact archeological resources which are potentially eligible, eligible or listed on the National Register. Specifically, two anomalies within SC waters between Stations 41+500 – 49+500, two confederate crib obstructions within GA and SC waters between stations 55+000 – 68+500 and the CSS Georgia. SCDHEC OCRM staff has coordinated with the South Carolina Department of Archives and History (SHPO) and re-enforce their concerns in a letter to you dated December 7, 2010.

SCDHEC OCRM has the responsibility to consider the impacts to the extent to which the proposed project will have on these resources. *Letter from SCDHEC-OCRM dated January 31, 2011* at 1.

RESPONSE: Based on the Corps's recent coordination (February 2011) with the South Carolina State Historic Preservation Office, the SC SHPO is satisfied with the Programmatic Agreement and has no outstanding concerns regarding the proposed SHEP.

25. **OBJECTION:** SCDHEC-OCRM does not concur that the five dredging alternatives are consistent with the South Carolina Coastal Management Program (SCCMP) to the maximum extent practicable because it will potentially result in the adverse impact to GAPCs. However, SCDHEC-OCRM could find this aspect of the federal activity consistent if properly mitigated to SHPOs satisfaction. *Letter from SCDHEC-OCRM dated January 31, 2011* at 1.

RESPONSE: Based on the Corps's recent coordination (February 2011) with the South Carolina State Historic Preservation Office, it is satisfied with the Programmatic Agreement and has no outstanding concerns regarding the proposed SHEP. The SHPO has indicated that the proposed mitigation presented in the report is acceptable.

B. SCDHEC-OCRM's Consistency Review Did Not Adequately Consider National Interest and Regional Benefits

SCDHEC-OCRM's consistency review did not adequately consider the national interest and regional benefits of the SHEP. Such consideration is mandated by federal law and regulations, South Carolina state law, and the SCCMP. The CZMA at 16 U.S.C. § 1455(d)(12) requires that a management plan contain "a method for assuring that local land use and water use regulations within the coastal zone do not unreasonably restrict or exclude land uses of regional benefit." NOAA's CZMA regulations at 15 CFR 923.12 state that in accordance with this statutory requirement a management program must "identify what constitutes uses of regional benefit" 15 CFR § 923.12(a) and "identify and utilize one or a combination of methods, consistent with the control techniques employed by the State, to assure local land and water use regulations do not unreasonably restrict or exclude uses of regional benefit." 15 C.F.R § 923.12(b). Also, 15 CFR § 923.52(a) states that a "management program must provide for adequate consideration of the national interest involved in planning for, and managing the coastal zone, including the siting of facilities...which are of greater than local significance." To this end, S.C. Code. Ann. § 48-39-80(B)(6) states that the management program shall "provide for adequate consideration of the local, regional, state, and national interest involved in the siting of facilities for...adequate transportation facilities and other public services necessary to meet requirements which are other than local in nature."

The SCCMP defines activities considered to be of regional benefit as those that "1) have been identified as Activities Subject to Management, that is, those determined to have direct and significant impact on coastal waters, and 2) result in a multi-county environmental, economic, social, or cultural benefit." SCCMP at III-8. The SCCMP explicitly states that "Activities of Regional Benefit in the South Carolina coastal zone are: 1) Transportation facilities – including...ports". *Id.* The SCCMP also states that the "following concerns are considered by South Carolina to be of such long-range, comprehensive importance as to be in the national

interest; 1. National Defense” and “3. Maintenance of Navigation”. SCCMP at III-5. The SCCMP goes on to state that “Resource Policies of particular interest for national defense are: Transportation a) Ports” and “Dredging, a) Dredging, b) Dredge Material Disposal. SCCMP at III-6.

The SHEP is a substantial navigation project that involves both dredging and dredge material disposal that our studies indicate will produce well over \$100 Million a year in national economic benefits. The SCCMP explicitly states that port projects are activities of regional benefit. The SCCMP explicitly states the maintenance of navigation is a concern of national interest. The SCCMP explicitly states that national defense is a concern of national interest and that ports, dredging, and dredge material disposal are of particular interest for national defense. Federal and state laws require that consistency determinations adequately consider the national interest and regional benefits of projects submitted for review. However, SCDHEC-OCRM’s review does not recognize the national interest or regional benefits of the SHEP. In fact, the SCDHEC-OCRM consistency review contains statements that directly contradict the SCCMP. The Garden City Terminal, the facility that will receive most of the more efficiently received cargo, is sited only miles from the border of South Carolina. The SCCMP states that the ports and commercial waterways of South Carolina “have a major national impact by providing a means of access to international and domestic markets.” SCCMP at III-19. Yet, SCDHEC-OCRM’s letter of January 25, 2011 states that “all of the benefits from the deepening of the Savannah Harbor will be accrued to the state of Georgia” In light of the SCCMP statements regarding the great importance of South Carolina ports, all of which handle substantially less cargo than Savannah Harbor and are not located as close to any bordering state, this conclusion is unfounded.

The only acknowledgment of the national interest in the SHEP and its regional benefits was provided in a letter from the SCDHEC-OCRM dated May 27, 2011. This letter contains nothing more than a statement that the SCDHEC-OCRM did consider the national interest and regional benefits and found them insufficient to outweigh the perceived negative environmental effects of the project. This alleged consideration of the national interest in the SHEP and its regional benefits is not sufficient.

C. SCDHEC-OCRM’s Consistency Review Did Not Adequately Consider the SCCMP’s Presumption in Favor of Developing Existing Port Facilities

SCDHEC-OCRM’s consistency review did not comply with the SCCMP in its discussion of a Jasper Ocean Terminal. The SCCMP states that “new port development should take place in existing industrialized areas where sufficient support facilities are available including public utilities, rail and highway transportation access, and navigation channels which are already maintained, unless there are no feasible alternatives or an overriding public interest can be demonstrated, and any substantial environment damage can be minimized.” SCCMP at III-19-20. The SCCMP also states that when considering port and harbor development projects in the coastal zone a policy of “maximizing the use of existing developed port areas, when feasible, before establishing new facilities in relatively undeveloped areas” should be considered. SCCMP at III-21. Thus, it is apparent that the SCCMP strongly supports the development of existing port facilities in favor of constructing new ports. There is no current utility, highway, or

rail access to a potential Jasper Ocean Terminal site while the Savannah Harbor supports existing, fully operation terminal, however, SCDHEC-OCRM asserts that insufficient consideration has been given the Jasper Ocean Terminal.

D. Summary of Additional Coordination and Information Provided to SCDHEC-OCRM

While the Corps contends that earlier responses to SCDHEC-OCRM's objections were sufficient to address those objections, the Corps did subsequently provide additional explanatory information in an attempt to mutually resolve the State's concerns about the impacts of the SHEP. A summary of this coordination is as follows:

1. The Savannah District Engineer and staff met with the SCDHEC-OCRM on April 21, 2011 to discuss the Corps's Federal Consistency Determination (DEIS, Appx. J). OCRM staff had reviewed the responses that the Corps had provided to their comments on the DEIS. They identified three issues on which they still had questions -- wetlands, dissolved oxygen, and Shortnose sturgeon. A good discussion was had on those issues and the Corps agreed to provide more information to clarify the project's expected effects. OCRM did not identify any issues that would necessarily keep them from concurring in the Corps's FCD. The meeting was very cordial and both parties agreed to collaboratively work through the remaining issues.

SCDHEC requested the following information:

- a. Draft responses to EPA comments
- b. Draft responses to Department of Commerce comments
- c. Draft responses to Department of Interior comments
- d. Comments from SC SHPO
- e. Updated table of wetland impacts
- f. Salinity under various conditions (existing, with deepening, with deepening and mitigation (flow rerouting))
- g. Wetland areas with direct and indirect impacts
- h. Wetland areas benefitting from flow rerouting

2. April 21, 2011: the Corps's Bill Bailey provided items a-d via email (5:56 PM).

3. May 13, 2011: Bill Bailey provided items e-h via email (2:29 PM).

4. Letter from SCDHEC-OCRM date May 27, 2011: SCDHEC-OCRM sent a letter to acknowledge receipt of additional information described in 4, 5, and 6 above and to rebut assertions in the USACE March 20, 2011 letter. Specifically, SCDHEC asserted that it did consider the nation interest as well as regional benefits. SCDHEC-OCRM stated that the "negative impacts [environmental] impacts outweighed any benefits that might be in the national interest." Similarly, for regional benefits, specifically transportation facilities and parks, SHEP was found to be inconsistent and that "the benefits to South Carolina from the project are minimal in light of the direct and indirect impacts." The letter closes by referencing the January 25 and January 31 letters stating the project is inconsistent primarily because of the out-of-kind mitigation proposed for wetland impacts, the DO injection system that "has not been shown to be effective in tidal systems", and the reliance on annual appropriations to fund all the mitigation

features. "For projects of similar scope found consistent with South Carolinas' coastal program, SCHEC-OCRM required a showing of an on-going financial commitment to operate and maintain such a system/structure. Additionally, projects of similar scope that SCDHEC-OCRM found consistent with the Coastal program required an identifiable financially binding commitment such as a performance bond or letter of credit to cover the cost of maintenance, operation, reconstructing, or removal of structures that do not perform as predicted as well as restoring the affected area."

SCDHEC-OCRM concluded the letter by stating they welcome continued discussions that would "reduce the impacts of the project as well as modifications to the proposed mitigation."

5. June 1, 2011: Wetlands Interagency Coordination Team (ICT) Meeting in Atlanta, GA:

Bill Bailey, Mackie McIntosh, and Dr. Jeffrey King met with the Wetlands ICT in Atlanta, GA, at which members of SCDHEC-OCRM staff were present. Corps staff presented technical analyses of the indirect wetland impacts that had been conducted since release of the Draft reports. Dr. King explained that the vegetative conversion would not be a major one and would have a negligible or minor adverse effect on overall wetland function. The group discussion focused on the USACE application of the Regulatory SOP. During part of that discussion, SCDHEC stated that tidal saltwater marsh was more valuable than tidal freshwater marsh, a point which USFWS refuted. The Corps and EPA described the 13-year coordination process, during which time the Wetland ICT agreed along the way that the approach to impacts and associated mitigation was acceptable to all interested parties.

Conclusion

The SHEP project with its comprehensive mitigation is fully consistent with the enforceable policies of the SCCMP. The Corps has adequately addressed all of the objections and concerns raised by SCDHEC-OCRM. In addition, SCDHEC-OCRM has not properly considered the national interest and regional benefits of the SHEP. For these reasons the final review of the Corps' Federal Consistency Determination should result in a "concurrence" from DHEC. The Corps reserves the right to submit additional documentation and argument as appropriate during the final review process.

BOARD:
Allen Amuler
Chairman
Mark S. Lutz
Vice Chairman
Steven G. Kinser
Secretary



C. Ed Hunter, Commissioner

Promoting and protecting the health of the public and the environment

Clerk, S.C. Board of Health and Environmental Control
2600 Bull Street, Columbia, SC 29201
Telephone: (803) 898-3309 Fax: (803) 898-3393

BOARD:
B. Kenyon Wells
L. Clarence Bates, Jr.
Ann B. Kirel, DDS
John O. Hutto, Jr., MD

RECEIVED
OCT 19 2011
EXECUTIVE DIVISION

October 17, 2011

Via U.S. Mail - Certified

91 7108 2133 3937 3695 9470

US Army Corp of Engineers
Savannah District
William G. Bailey, Chief
Planning Division
100 East Oglethorpe Avenue
Savannah, GA 31402

91 7108 2133 3937 3695 9487

Georgia Ports Authority
Curtis Foltz, Executive Director
PO Box 2406
Savannah, GA 31402

Via Interagency Mail Delivery

Roger P. Hall, Esq.
SCDHEC - Office of General Counsel
2600 Bull Street
Columbia, SC 29201

RE: ***Docket No. 11-RFR-52 – Decision dated September 30, 2011, to deny a 401 Water Quality Certification and objection to the Federal Consistency Determination under the Coastal Zone Management Act.***

The South Carolina Board of Health and Environmental Control will hold a Final Review Conference on Thursday, November 10, 2011, at 10:00 a.m. in the Board Room (3420), S.C. Department of Health and Environmental Control, 2600 Bull Street, Columbia, South Carolina, on the above referenced matters.


1 of 2

The Board has approved the following outline of procedures for conferences:

- Swear all witnesses
- Presentation by parties
 - Order of presentation:
 - DHEC Staff
 - Other affected parties supporting staff decision
 - Requestor(s)
 - Other affected parties challenging staff decision
 - Rebuttal:
 - DHEC Staff
 - Other affected parties supporting staff decision
 - Requestor(s)
 - Other affected parties challenging staff decision
- Parties may present evidence; rules of admissibility of evidence do not apply
- At any time during conference, officers conducting conference may request additional information and may question parties and anyone providing information
- Burden of proof is on Requestor(s)
- Presiding officer may impose time limits
- Conference is open to the public
- Officers may deliberate in closed session
- Officers may announce decision at conclusion of conference or may reserve consideration

If any party would like to have a transcript of the review conference, please notify (by e-mail at lucaslm@dhec.sc.gov or mail at the above address) the Clerk of the Board by Wednesday, November 2, 2011, so that arrangements can be made to have a reporter present for the conference. The parties requesting a court reporter will be responsible for payment of the court reporter.

Sincerely,



Lisa Lucas Longshore
Clerk

OGC # 21304

I:\Share\LEGAL\ALL\MATTERS\21304 RFR BOW Savannah Harbor Expansion Project\rc.doc

BOARD:
Allen Amster
Chairman
Mark S. Lutz
Vice Chairman
Steven G. Kline
Secretary



BOARD:
S. Kenyon Wells
L. Clarence Berry, Jr.
Ann B. Kisel, DDS
John D. Hinton, Sr., MD

Promoting and protecting the health of the public and the environment
Clerk, S.C. Board of Health and Environmental Control
2600 Bull Street, Columbia, SC 29201
Telephone: (803) 898-3309 Fax: (803) 898-3393

October 24, 2011

Via U.S. Mail and Electronic Mail
Keith.J.Klein@usace.army.mil
US Army Corp of Engineers
Savannah District
Keith Klein,
Acting District Counsel
100 East Oglethorpe Avenue
Savannah, GA 31402

cfoltz@gaports.com
Georgia Ports Authority
Curtis Foltz, Executive Director
PO Box 2406
Savannah, GA 31402

Via Electronic Mail
harlesj@dhec.sc.gov
John Harleston, Esq.
SCDHEC – Office of General Counsel
2600 Bull Street
Columbia, SC 29201

RE: ***Final Review Conference - Docket No. 11-RFR-52 – Decision dated September 30, 2011, to deny a 401 Water Quality Certification and objection to the Federal Consistency Determination under the Coastal Zone Management Act.***

The South Carolina Board of Health and Environmental Control will hold a Final Review Conference on Thursday, November 10, 2011, at 10:00 a.m. in the Board Room (3420), S.C. Department of Health and Environmental Control, 2600 Bull Street, Columbia, South Carolina, on the above referenced matters.

The Board has allotted times as follows for the Final Review Conference:

The Department will be allowed forty (40) minutes.

The U.S. Army Corp of Engineers and the Georgia Ports Authority will be allowed forty (40) minutes to be divided as determined by the parties or the Board will allow twenty (20) minutes for each.


Each side will be allowed five minutes in rebuttal.

The Board has approved the following outline of procedures for conferences:

- Swear all witnesses
- Presentation by parties
 - Order of presentation:
 - DHEC Staff
 - Other affected parties supporting staff decision
 - Requestor(s)
 - Other affected parties challenging staff decision
 - Rebuttal:
 - DHEC Staff
 - Other affected parties supporting staff decision
 - Requestor(s)
 - Other affected parties challenging staff decision
- Parties may present evidence; rules of admissibility of evidence do not apply
- At any time during conference, officers conducting conference may request additional information and may question parties and anyone providing information
- Burden of proof is on Requestor(s)
- Presiding officer may impose time limits
- Conference is open to the public
- Officers may deliberate in closed session
- Officers may announce decision at conclusion of conference or may reserve consideration

If any party would like to have a transcript of the review conference, please notify (by e-mail at lucaslm@dhec.sc.gov or mail at the above address) the Clerk of the Board by Wednesday, November 2, 2011, so that arrangements can be made to have a reporter present for the conference. The parties requesting a court reporter will be responsible for payment of the court reporter.

Sincerely,



Lisa Lucas Longshore
Clerk

OGC # 21304

S:\ALL\MATTERS\21304 RFR BOW Savannah Harbor Expansion Project\conference times.doc\ERS\21304 RFR BOW Savannah Harbor Expansion Project\rc.doc



DEPARTMENT OF THE ARMY
SAVANNAH DISTRICT, CORPS OF ENGINEERS
100 W. OGLETHORPE AVENUE
SAVANNAH, GEORGIA 31401-3640

November 4, 2011

Office of Counsel

John Harleston
South Carolina Department of Health and Environmental Control
2600 Bull Street
Columbia, South Carolina 29201

SUBJECT: Savannah Harbor Expansion Project (SHEP) – Proposed Conditions

Dear John:

Thank you and DHEC staff for meeting with Savannah District last Friday to discuss the water quality certification and coastal zone consistency determination for the SHEP project. In an effort to resolve key issues, the Corps proposes the following conditions be included in an approved water quality certification:

1. "The USACE shall comply with all terms and conditions in the National Marine Fisheries Service Final Biological Opinion."
2. "To ensure compliance with coastal zone policies, the USACE shall promptly circulate the Programmatic Agreement for Cultural Resources in the Environmental Impact Statement for the Savannah Harbor Expansion Project, Appendix G, as revised to include the US Navy, to the Georgia and South Carolina State Historic Preservation Officers, and the US Navy, in turn, for their signature."
3. "The USACE shall document in the project Record of Decision its binding commitment to install, operate, and maintain the dissolved oxygen injection system in accordance with the project mitigation plan subject to Congressional appropriation of funds for the project, and shall make the dissolved oxygen injection system a top priority for annual operation and maintenance (O&M) funds appropriated and received for the project, above normal maintenance requirements."

In addition, with regard to the dissolved oxygen injection system, please see the attached letter from the District Engineer addressing maintenance funding concerns.

Please let us know if this information and commitments will enable narrowing the issues before the Final Review Conference to only the wetland mitigation (salt marsh conversion) issue.

Sincerely,

Keith J. Klein
Acting District Counsel

Enclosure



REPLY TO
ATTENTION OF:

DEPARTMENT OF THE ARMY
SAVANNAH DISTRICT, CORPS OF ENGINEERS
100 W. OGLETHORPE AVENUE
SAVANNAH, GEORGIA 31401-3640

November 4, 2011

Executive Office

Mr. David Wilson
South Carolina Department of
Health and Environmental Control
2600 Bull Street
Columbia, South Carolina 29201

Dear Mr. Wilson:


Thank you for meeting with Savannah District last Friday to discuss potential resolution of key issues regarding water quality certification and coastal zone consistency. At the meeting, my office agreed to further consider ways of addressing DHEC's concerns regarding operation and maintenance of the project's dissolved oxygen (DO) injection system.

The proposed Speece Cone technology has been used in other applications worldwide for 30 years and underwent rigorous on-site testing in Savannah Harbor during 2007. The DO system design for Savannah Harbor already includes reserve capacity and an operational back-up unit at each of two installation locations. The estimated life of the cones and lines is 40 years and the estimated life of the controls, oxygen generator, and pumps is 20 years (Draft General Re-Evaluation Report, page 236). During construction, there will be a Transfer Efficiency Study to optimize the DO system. During the project's 10-year post-construction monitoring period, needed adjustments and modifications to the DO system will be included in the project's \$18 million Adaptive Management plan (Draft Environmental Impact Statement, Appendix D, pages 33-34). Successful installation, operation, and maintenance of the DO system is already or will be a requirement of several approvals for the project, including Georgia's water quality certification and the National Marine Fisheries Service Biological Opinion.

In addition, the Corps is making the following commitments to address DHEC's concerns. First, the project Record of Decision will expressly recognize a binding commitment to install, operate, and maintain the DO system in accordance with the project mitigation plan, subject to Congressional appropriation of funds for the project. Second, the Savannah District will make the DO system a top priority for annual operation and maintenance (O&M) funds appropriated and received for the project, above normal maintenance requirements.

We believe that the information and commitments in this letter should satisfactorily resolve the remaining DO system issues.

Sincerely,



Jeffrey M. Hall
Colonel, US Army
Commanding

McIntosh, Margaret (Mackie) SAS

From: Klein, Keith J SAS
Sent: Monday, December 05, 2011 7:24 AM
To: McIntosh, Margaret (Mackie) SAS
Subject: FW: Dkt No. 11-RFR-52 - Corps Filing - Response/Brief (UNCLASSIFIED)
Attachments: Corps Response and Brief - Dkt No 11-RFR-52.pdf

Classification: UNCLASSIFIED
 Caveats: NONE

Per your request.

Keith J. Klein
 Acting District Counsel
 Savannah District
 U.S. Army Corps of Engineers
 Telephone: 912.652.5142
 Blackberry: 912.547.3962

-----Original Message-----

From: Klein, Keith J SAS
Sent: Wednesday, November 09, 2011 1:47 PM
To: Lucas, Lisa M.
Cc: Okane, Jason D SAS
Subject: Dkt No. 11-RFR-52 - Corps Filing - Response/Brief (UNCLASSIFIED)

Classification: UNCLASSIFIED
 Caveats: NONE

Ms. Longshore:

The US Army Corps of Engineers hereby files electronically the attached Response/Brief for the Final Review Conference tomorrow.

It is our understanding that if we filed this by 2 pm you would send it to the Board members today, and we request that you do so.

There are five exhibits that accompany the Response/Brief. Due to their size, I am going to e-mail them separately. If you do not think you can transmit the exhibits to the Board members with the Response/Brief today, it is okay with us if you just send the Response/Brief.

If you would kindly reply that you received this e-mail we would appreciate it. Thank you very much.

Keith J. Klein
 Acting District Counsel
 Savannah District
 U.S. Army Corps of Engineers
 Telephone: 912.652.5142
 Blackberry: 912.547.3962

Classification: UNCLASSIFIED

STATE OF SOUTH CAROLINA
BOARD OF HEALTH AND ENVIRONMENTAL CONTROL

US Army Corps of Engineers,	)	
Georgia Ports Authority,	)	
	)	
Requestors,	)	
v.	)	Final Review Conference
	)	Docket No. 11-RFR-52
South Carolina Department of Health	)	
and Environmental Control,	)	
	)	
Respondent.	)	

**US ARMY CORPS OF ENGINEERS' RESPONSE TO DHEC STAFF POSITION
AND BRIEF IN SUPPORT OF REQUEST FOR FINAL REVIEW**

The US Army Corps of Engineers ("Corps") submits this brief as additional evidence and argument in response to the South Carolina Department of Health and Environmental Control (DHEC) Summary of Issues and Staff Position ("Staff Position") dated October 31, 2011, and in further support of the Corps's request for final review of the September 30, 2011 DHEC staff decisions proposing (a) that the Board deny a South Carolina water quality certification for the Savannah Harbor Expansion Project ("SHEP" or "project") and (b) that the Board object to the Corps's federal coastal zone consistency determination for South Carolina.

INTRODUCTION

For more than ten years, many federal and state agencies, including DHEC and South Carolina DNR, have participated with the Corps and a wide variety of stakeholders in studying the potential economic benefits and environmental impacts of the Savannah Harbor Expansion Project. On November 10, 2010, the Corps issued a Joint Public Notice, Draft Environmental Impact Statement ("DEIS"), and Draft General Re-Evaluation Report ("DGRR") for the project,

reflecting the results of this lengthy, comprehensive study process. The Joint Public Notice constituted an application for Clean Water Act Section 401 water quality certification ("WQC") from Georgia and South Carolina. The DEIS, Appendices I and J, contained the federal coastal zone management ("CZM") consistency determinations for each State.

In support of its request for final review of the DHEC staff decisions on the WQC and CZM consistency determination for South Carolina, the Corps is making an oral presentation to the Board and filing this brief with attached exhibits. The Corps further incorporates by reference all previous correspondence on these issues contained in the administrative record provided to the Board by DHEC staff, plus the DEIS, GRR, and all supporting studies. This brief will address the five grounds for denial by DHEC in the order set forth in the Staff Position, *i.e.*, (1) dissolved oxygen injection system, (2) wetland mitigation; (3) Shortnose sturgeon; (4) alternatives; and (5) archaeological resources. However, before doing so, it is important to put SHEP in context.

At present, Savannah Harbor is a vital economic engine for jobs and growth in both Georgia and South Carolina. About 40 percent of the Savannah Harbor port workforce lives in South Carolina, and for years Savannah Harbor has been maintained as a federal navigation project with benefits to both States. Previous deepenings, regular dredging, and private activities have also resulted in an adapted environment with certain positive impacts to waters of both States. For example, the Savannah National Wildlife Refuge, which is located mostly on the South Carolina side of the Savannah River, provides outstanding habitat for fish and wildlife, as well as recreation and educational opportunities.

Much of the freshwater tidal marsh in the Savannah National Wildlife Refuge is former rice plantation land that was farmed for many years before being abandoned in the late 1800s due

to a poor economy. Since then, these areas have evolved into a valuable, high priority natural resource. Similarly, wetland areas near the Wildlife Refuge that have been classified as salt marsh for purposes of impact evaluation conducted for this project – and that are now claimed as highly valuable by DHEC staff – were formerly freshwater tidal wetland that was converted by previous harbor deepening.

Now, Savannah Harbor, as well as Charleston Harbor and other South Atlantic ports, confronts a problem as the world shipping industry transitions to much larger ships (referred to as Post-Panamax vessels) that require deeper harbors. But there is great opportunity as well, for both Georgia and South Carolina, because the projected dramatic growth in shipping container volume over the next 35 years will result in substantial business for all South Atlantic ports, including Charleston and Savannah. To deepen Charleston, or a proposed Jasper Ocean Terminal, will require similar study and rigorous analysis and development of environmental impact mitigation techniques as SHEP. Experience shows that Savannah Harbor, like other ports, can be deepened in a manner that is protective of the environment, including South Carolina's water quality and coastal zone. And there is every reason to ensure this remains true after construction: the Savannah River estuary and Savannah National Wildlife Refuge are shared resources that both Georgia and South Carolina have a genuine interest in preserving and enhancing.

I. THE DISSOLVED OXYGEN INJECTION SYSTEM WILL BE PROPERLY MAINTAINED.

One of the key elements of the SHEP mitigation plan is a dissolved oxygen injection system ("DO system") that will maintain or improve DO levels in Savannah River to protect and benefit fish. Over the years, DHEC staff expressed concern about this aspect of the SHEP mitigation plan. The Corps conducted several technical studies to obtain information to address

those concerns, ultimately determining the DO system is a viable technology that will actually increase current DO levels in 90% of the Savannah River estuary, providing a substantial benefit to South Carolina waters. DHEC staff now appears to agree that the DO system will work:

Since the waters within the lower Savannah estuary will sustain impacts from the reduced DO levels resulting from the proposed deepening, the Corps plans to inject oxygen into the water column to raise DO levels. The injection system will utilize Speece Cones to directly inject oxygen into the river to increase the DO concentration throughout the waterbody. **The effects should raise DO levels to acceptable levels as the super oxygenated water is pumped through diffusers back into the river.** Modeling data has been provided to determine the extent to which this system will oxygenate the water, and to show the effectiveness of the system to achieve acceptable DO levels.

DHEC Sept. 30, 2011 WQC Proposed Decision, at 3 (emphasis added).

At this point, the Corps believes the sole remaining issue is DHEC staff's concern about the long-term operation and maintenance ("O&M") of the DO system. Staff Position, at 3-4. DHEC staff is asking the federal government to go beyond what South Carolina or any state has ever required for a federal navigation project – namely to escrow money sufficient to cover 50 years of annual O&M appropriations at an average \$1.2 million per year, or a total of \$60 million.¹

DHEC staff has been unable to provide any example of a situation where the federal government has obligated annual O&M funds in advance of construction of a federal navigation project. DHEC staff did provide two examples of what they believed might be acceptable financial assurance. The first involved the Department of Energy (DOE) at a mixed waste site in Oak Ridge, TN. However, in that situation, DOE expressly made any long-range funds commitment subject to Congressional appropriations. See Exhibit A attached hereto, Ordering Paragraph 4 (Consent Order in apparent enforcement action). In the second example involving

¹ If such a precedent were set, it would apply to all future federal navigation projects in South Carolina, including deepening Charleston Harbor.

the South Carolina Port Authority, the Port provided cash as the mitigation, rather than long-term O&M of the proposed mitigation.

As noted in the DOE Consent Order (Ex. A, Ordering Paragraph 4), the Anti-Deficiency Act, 31 USC 1341, prohibits federal government employees from obligating funds in advance of Congressional appropriations. There are other budgetary authorities and restrictions as well. However, regardless of the limitations of the federal government budget process,² there is ample assurance that the DO system will be funded over the long-term.

Recently, the Corps's Savannah District sent DHEC staff a letter, attached hereto as Exhibit B, which addresses ways that O&M of the DO system will be assured for the life of the project. First, the letter explained why the DO system will perform as intended over the life of the project. Among other things, the Corps noted that the system design includes back-up capacity to address mechanical breakdowns. In addition, the Corps explained that the DO system will be a well-constructed mechanical system, with 20-year and 40-year life expectancies for the main system components and pumps. *See* Ex. B, second paragraph.

In the second part of the letter, the Corps stated that it will make the DO system's O&M a binding commitment in the project Record of Decision and a top priority in the Savannah District's annual O&M budget (subject to Congressional appropriations). In addition, the Corps recommended the following condition be inserted in an approved WQC certification:

The Corps shall document in the project Record of Decision its binding commitment to install, operate, and maintain the dissolved oxygen injection system in accordance with the project mitigation plan subject to Congressional appropriation of funds for the project, and shall make the dissolved oxygen injection system a top priority for annual operation and maintenance (O&M) funds appropriated and received for the project, above normal maintenance requirements.

² It is not an option to have the non-federal sponsor provide money in an escrow up front because O&M for a federal navigation project is exclusively a federal responsibility.

See Ex. B, third paragraph.

In addition, the Corps pointed out that the project includes a Monitoring and Adaptive Management Plan, which specifically addresses how the DO system will be reviewed and modified post-construction to ensure it performs as intended. See Ex. B, second paragraph, and DEIS, Appendix D. Finally, to the extent additional assurance may be helpful, certain other approvals for the project require the Corps to provide long-term O&M assurance, including the Georgia Section 401 water quality certification (Clean Water Act compliance) and the National Marine Fisheries Service Final Biological Opinion (Endangered Species Act compliance). See Ex. B, fourth paragraph. With the foregoing requirements, commitments, and safeguards, the Board can be confident that the DO system will be adequately funded.

II. THE PROJECT'S WETLAND MITIGATION PLAN COMPLIES WITH SOUTH CAROLINA'S WATER QUALITY STANDARDS, THE COASTAL MANAGEMENT PLAN, AND THE 2008 MITIGATION RULE.

DHEC staff contends that the SHEP wetland mitigation plan does not comply with the USACE-USEPA "2008 Mitigation Rule," which is found at 33 CFR Part 332 and 40 CFR Part 230. Staff Position, at 5-6. However, as discussed below and in an 80-page analysis attached to this brief, the SHEP wetland mitigation plan does in fact comply with the 2008 Mitigation Rule.³ See Exhibit C attached hereto, "VII Consideration of the USEPA/USACE Mitigation Rule" and Section II.F, *infra*, as well as other comments in this brief. Among other things, the attached

³ From a strict legal standpoint, the 2008 Mitigation Rule applies to Clean Water Act Section 404 permit applications, not Corps civil works projects such as SHEP. In addition, SHEP wetland mitigation study and planning began in 2002. The agencies devoted substantial time, effort, and expense to development of the wetland mitigation and associated flow-rerouting plan before the Mitigation Rule was promulgated in 2008. The preamble to the 2008 Mitigation Rule states: "the new requirements should not be applied retroactively to permit applicants who have invested substantial effort in developing data and plans under the previous rules and guidance." 73 Fed. Reg. 19594, at 19608 (Apr. 10, 2008). Nevertheless, the Corps has attempted in good faith to follow the 2008 Mitigation Rule to the extent practicable.

analysis explains the important functional assessment that was conducted to evaluate indirect impacts to wetlands resulting from SHEP. *See, e.g., Ex. C, at 5-7.* The analysis has previously been provided to DHEC staff.

The primary objection raised by DHEC regarding SHEP wetland mitigation is that the plan reduces salinity in 740 acres of marsh without sufficient compensatory mitigation.⁴ *See* DHEC Sept. 30, 2011 letter, at 8-9. The premise for this objection is that wetlands that were classified in the project as salt marsh (for purposes of impact evaluation) have a higher ecological function than lower salinity wetlands (classified as brackish marsh). However, this premise does not hold true in the Savannah River Basin, based on scientific investigations and guidance provided by the project's Wetland Interagency Coordination Team (Wetland ICT), which included representatives of DHEC, SC DNR, GA DNR, USEPA, USFWS, and NOAA Fisheries.

A. Description of the Flow Re-Routing and Wetland Mitigation Plan.

The issue raised by DHEC is a consequence of the project's goal of minimizing impacts to freshwater tidal marsh as much as possible. The Wetland ICT determined in 2003 that freshwater tidal marsh is the highest priority wetland natural resource in the Savannah River Basin. That priority is primarily based on the wetland losses that have occurred since the 1800s in the Savannah River Basin. Tidal freshwater marsh is rare and its acreage in the Savannah River Basin has been particularly reduced over the years. Although ecologically important in their own right, salt marsh and brackish marsh are more available in other basins – over 408,000 acres in South Carolina and another 405,000 acres in Georgia based on National Wetland

⁴ In this brief, the Corps is using the wetland acreage figures for the -47 foot alternative, which has tentatively been selected as the preferred alternative. DHEC is using the wetland acreage figures for the -48 foot alternative. The overall wetland impacts for the -47 foot alternative are lower, although the salt marsh figure is slightly higher (740 acres vs. 730 acres).

Inventory maps of Estuarine and Marine Wetlands. *See, e.g.*, DEIS, Appendix E, Fish and Wildlife Coordination Act Report, at 19; DGRR, at Appendix C, Engineering Investigations, at 127.

The flow re-routing plan essentially directs more freshwater into the Back River area on the South Carolina side of the Savannah River Basin, as requested by USFWS and agreed to by the Wetland ICT, in part to respond to the Wetland ICT's concerns (including those of its DHEC and SC DNR members) that further salinity increases in that area should be prevented and reversed if possible to avoid further reduction in diversity of the estuary. *See, e.g.*, SC DNR's Jan. 25, 2011 comment letter, at 3 of the enclosure (stating DNR's "overriding concern" is freshwater tidal marsh). In addition to preventing further loss of tidal freshwater wetlands, the flow re-routing will restore some wetlands classified as brackish to freshwater marsh. One of the other expected effects is to reduce salinity in another 740 acres, which DHEC decided recently was an uncompensated conversion and loss of salt marsh.

Without the flow re-routing plan, the -47 foot deepening alternative for the project would increase salinity in 1,177 acres of freshwater tidal wetland, converting it to brackish marsh. All agencies agree this would be a measurable loss in wetland value. DEIS, Section 5.1.2.2, at 5-13. With flow re-routing, the project will affect (increase) salinity in only 223 acres of freshwater wetland (located in Georgia waters), a far lesser number of acres than without flow re-routing. *Id.* Largely to compensate for the increased salinity in those 223 acres, the mitigation plan includes preservation of 2,245 acres of wetlands (primarily bottomland hardwood) and upland buffer that would be acquired and deeded to the Savannah National Wildlife Refuge.

As for the salinity changes in the 740 acres of wetland referred to as salt marsh that DHEC is concerned about, there is a strong argument that the salinity **reduction** that would

occur in this area does not require mitigation because it would be restoration of lower salinity brackish marsh that had been converted over time in the harbor.⁵ Conceptually, the basic question is whether the **reduction** in salinity in the 740 acre area results in a legitimate “trade-off” involving roughly equivalent value, much like selling one car to buy a different model at a comparable price. In both situations, whether the “trade-off” is in fact equal or nearly equal depends on how the wetlands or cars function before and after. Before addressing function, though, it is important to understand how the distinction was made between classifications of salt and brackish marsh for this project.

B. There Is No Exact Scientific Line Between Salt and Brackish Marsh.

For this project, the Wetland ICT agreed to use four parts per thousand (4 ppt) salinity as the dividing line between classification of marsh as salt marsh or brackish marsh. To illustrate, a wetland with 3 ppt salinity would be classified as brackish marsh for this project and a wetland with 5 ppt salinity would be classified as salt marsh.⁶ Establishing a dividing line at 4 ppt was necessary to enable numeric computer modeling to provide estimates of quantities and locations of salinity changes in the estuary.

However, the dividing line of 4 ppt between salt and brackish marsh used for this project is a very conservative one. In the scientific literature, there is research that supports setting the dividing line between salt and brackish marsh at 10 or even 17 ppt (the salinity of seawater is 30 ppt). See Ex. C, at 5-6. If the dividing line had been set higher for SHEP, DHEC’s concerns would be eliminated because the 740 acres at issue would have been classified as brackish marsh. Thus, there is a continuum, rather than a sharp distinction, between brackish and salt

⁵ Restoration is a preferred option under the 2008 Mitigation Rule.

⁶ For comparison, a wetland with less than 0.5 ppt salinity would be considered freshwater marsh.

marsh. The real question is whether there is any functional difference between the two levels of salinity in the marsh, regardless of what salinity level is used to classify or label them. This only makes sense because once a wetland is no longer dominated by freshwater, the effect of salinity levels between, for example, 4 and 7 ppt is one of degree, not kind.

It is instructive that nowhere in the DHEC water quality regulations is there any distinction between salt marsh and brackish marsh. In R. 61-68, Water Quality Standards and Classifications, DHEC could have classified salt marsh as a significant resource, one more valuable than brackish marsh. Instead, DHEC drew only one important distinction that is relevant here, that between freshwater and tidal saltwater. See R. 61-68, Sec. G, Class Descriptions, Designations, and Specific Standards for Surface Waters, para G.10 – G.13. In sec. B.57 of R. 61-68, DHEC then defined tidal saltwaters as “those waters whose elevation is subject to changes due to oceanic tides and which have chloride ion content in excess of 250 milligrams per liter (mg/l)(salinity = 0.48 parts per thousand).” In other words, DHEC’s definition of tidal saltwaters includes both brackish marsh and salt marsh, and nothing in the definition or elsewhere in the regulation evinces any official, regulatory determination that salt marsh is a higher priority resource than brackish marsh.

C. The 740 Acres Will Exhibit Approximately the Same Functional Value, Whether Classified as Brackish or Salt Marsh.

The Corps performed a scientific investigation to determine whether reduction of the salinity in the 740 acres of the marsh at issue would impair the wetland functions of this area. DEIS, Appendix C, at 51 and Appendix A to Appendix C, Worksheets. Again, it is important to understand that the project would **decrease** salinity in the 740 acres at issue. Less salt is usually considered a good thing environmentally in the Savannah River estuary, but in this case, DHEC is contending that more salt is better – in an area 20 miles inland from the coast that long ago

was freshwater tidal wetland, and that has become more saline over time. *See, e.g.*, DHEC Sept. 30, 2011 WQC Proposed Decision, at 8 (“The plan places an emphasis on minimizing the loss of freshwater tidally influenced wetlands, because these wetlands have historically been altered by past projects.”).

As set out in a key functional assessment table that is part of the Corps’s 80-page analysis of compliance with the 2008 Mitigation Rule, there are 11 commonly accepted functions of wetlands, ranging from water purification to fish and wildlife habitat. *See* Ex. C, at 6 (Table 1). It takes no specialized knowledge to understand that wetland functions such as flood protection, streamflow maintenance, retention of particles, and surface water storage would not be affected by conversion of salt marsh to brackish marsh. *See* Ex. C, at 6 (Table 1), 7-22 (negligible difference in these functions between salt marsh and brackish marsh). The amount of water and the water levels in the marsh will remain the same regardless of whether the water is saline or brackish – it is only the level of salinity that changes (**decreases**).

In addition, decreased salinity would not measurably change the type of vegetation found in the 740 acres at issue. The most common form of salt marsh vegetation – a plant known as *spartina alterniflora* – would continue to grow and flourish in a brackish marsh setting. *See* Ex. C, at 45. Similarly, fish and wildlife habitat would experience only minor change. *See* Ex. C, at 32-34, 44-45. The same large number of generalist species of fish and wildlife that use the 740 acres of salt marsh would continue to live in and use the same 740 acres after re-classification to brackish marsh. *Id.*

Because the functional assessment shows the restoration of brackish marsh would cause negligible change in the 11 key wetland functions, the Corps reasonably concluded that it was appropriate to view the change from the salt marsh to brackish marsh classification as resulting

in “no net loss of wetlands,” which is the ultimate goal of the 2008 Mitigation Rule and previous wetland mitigation guidance.

D. The Project Mitigation Plan Complies With DHEC Rules.

DHEC R. 61.101, Water Quality Certification, para F.5.(a), states that certification will be denied “if the proposed activity permanently alters the aquatic ecosystem in the vicinity of the project such that its functions or values are eliminated or impaired,” and para F.6 states that “[c]ertification will not be issued unless the Department is assured the appropriate and practical steps . . . will be taken to minimize adverse impacts on water quality and the aquatic ecosystem.”

Based on the foregoing discussion, para F.5(a) does not apply because the salinity reduction in 740 acres of marsh will not eliminate or impair the functions or values of that area. And regardless, all appropriate and practical steps are being taken through the SHEP mitigation plan (wetlands, dissolved oxygen, fish passage, etc.) to minimize adverse impacts on water quality and the aquatic ecosystem. Simply stated, there are not likely to be significant effects, much less adverse impacts, to mitigate.

E. DHEC Changed Its Views On Wetland Mitigation.

On January 25, 2011, DHEC-OCRM submitted an objection to the Corps’s coastal zone consistency determination. A careful reading of that letter shows that OCRM did not raise the salt marsh to brackish marsh conversion issue. Instead, OCRM focused on deficiencies with regard to **freshwater** marsh mitigation caused by **increasing** salinity. Because DHEC-OCRM’s September 30, 2011 proposed decision (coastal zone) merely incorporated its January 25, 2011 letter, and that earlier letter did not specifically raise any issue about the conversion of salt marsh to brackish marsh, or inadequate mitigation for it, DHEC-OCRM has not properly raised any salt marsh conversion issue for consideration by the Board with regard to coastal zone consistency.

More importantly, the January 25, 2011 DHEC-OCRM letter can only fairly be characterized as demonstrating DHEC's position and agreement – at that time, at least – that freshwater marsh is, indeed, the most important wetland resource in the Savannah River Basin. As stated, the priority assigned to freshwater marsh for this project was established early in the process of wetland mitigation planning (well before 2008) – and all agencies then agreed and have continued to do so. As stated, the consequence of assigning freshwater marsh the highest priority was the flow re-routing plan – developed after intense study and much time and cost – which shaped the ensuing mitigation planning.

It was not until June 1, 2011, that DHEC revealed a changed position assigning a higher priority to salt marsh than previously announced (even though the marsh so labeled is only a few ppt more saline and indistinguishable as to vegetation and fish populations), and targeting the restoration from marsh classified as salt marsh to brackish marsh as its key issue. *See* DHEC Sept. 30, 2011 WQC Proposed Decision, at 8-9 (raising issue about impacts to 730 acres of salt marsh).

F. Additional Comments Regarding 2008 Mitigation Rule.

In addition to the detailed technical analysis provided in Exhibit C, the Corps makes the following observations regarding the application of the 2008 Mitigation Rule to this project. First, the Rule is flexible based on what is practicable. 33 CFR 332.3(a) (“The district engineer must determine the compensatory mitigation to be required in a DA permit, based on what is practicable and capable of compensating for the aquatic resource functions that will be lost as a result of the permitted activity.”) For this project, what is practicable is heavily influenced by the basic direction established by the Wetland ICT, which is to preserve as much freshwater tidal

marsh as possible, and the constraint that no salt marsh mitigation banks or in-lieu fee programs are available in the Savannah River Basin. *See* Ex. C, at 64-65.

Second, while the Rule prefers “in-kind” mitigation, the definition of in-kind is also flexible. In-kind is broadly defined to mean “a resource of a **similar** structural and functional type to the impacted resource.” 33 CFR 332.2 (emphasis added). The conversion to brackish marsh of 740 acres classified as salt marsh using the conservative salinity levels adopted for this project could be viewed as restoration in-kind because those particular 740 acres will be a resource of **similar** structural and functional type before and after. Indeed, the Rule itself draws no distinction between different types of tidal wetland. *See, e.g.*, 33 CFR 332.3(e)(1) (“In general, in-kind mitigation is preferable to out-of-kind mitigation because it is most likely to compensate for the functions and services lost at the impact site. For example, tidal wetland compensatory mitigation projects are most likely to compensate for unavoidable impacts to tidal wetlands . . .”). Certainly, DHEC has not cited any basis in law, regulation, or any official published policy to support its staff position that brackish marsh, especially when located 20 miles inland, cannot serve as in-kind mitigation for marsh that has only been classified as salt marsh for impact evaluation purposes.

G. Monitoring and Adaptive Management Would Ensure Mitigation Success.

Appendix D to the Draft Environmental Impact Statement contains a Monitoring and Adaptive Management Plan that provides additional assurance that restored brackish marsh will provide the same functional value as the so-called salt marsh. The Monitoring and Adaptive Management Plan envisions a process of detailed monitoring to establish a baseline before construction and then determine deviations from the baseline during and after construction. If important project mitigation features do not perform as planned, the Monitoring and Adaptive

Management Plan includes funding to enable modifications to be made to bring the mitigation in line with its expected performance.

H. Summary.

The Corps has shown that based on a detailed scientific functional assessment (*see* Ex. C), the project's wetland mitigation plan complies with South Carolina's water quality standards and coastal management plan because there would be no functional loss of or impairment to wetlands from restoration of higher salinity marsh to the type of brackish marsh that was historically present in the area. Given the natural resource agency priority assigned to freshwater marsh, the project's wetland mitigation plan, including adaptive management program, is the most practicable solution for compensating for indirect impacts to wetlands caused by salinity changes. The water quality certification should be approved and the Board should concur with the federal coastal zone consistency determination.

III. THE SHORTRNOSE STURGEON WILL BE PROTECTED

DHEC staff has agreed that if the National Marine Fisheries Service (NMFS) issues a favorable determination with regard to the shortnose sturgeon, there will no longer be any basis for objection to the project on endangered species grounds. Staff Position, at 6; DHEC Sept. 30, 2011 WQC Proposed Decision, at 9. On November 4, 2011, NMFS issued its Final Biological Opinion for the project, determining the project would not jeopardize the continued existence of the shortnose sturgeon provided the Corps complies with the project mitigation plan, including (a) installation, maintenance, and operation of the DO injection system, and (b) construction of a fish passage at the Savannah New Bluff Lock & Dam site near Augusta, GA. *See* Exhibit D attached hereto (NMFS Nov. 4, 2011 cover letter forwarding Final Biological Opinion). Based on issuance of the Final Biological Opinion, the Corps submits that the DHEC staff concerns regarding shortnose sturgeon have been fully addressed. To ensure additional comfort, the

Board could include the following condition in an approved WQC: “The Corps shall comply with all terms and conditions in the National Marine Fisheries Service Final Biological Opinion.” (As noted in Part I, above, such a condition would also help provide additional assurance that the DO injection system will be operated and maintained as proposed.).

IV. THE CORPS PROPERLY ANALYZED FEASIBLE ALTERNATIVES.

In its Staff Position, DHEC briefly states that the consideration of alternatives in the Draft Environmental Impact Statement (DEIS) was inadequate and that the Corps’s narrow project purpose excluded some feasible alternatives from consideration. DHEC staff does not identify any specific feasible alternatives. Staff Position, at 7. In its WQC Proposed Decision, DHEC staff omitted many important aspects of the Corps’s alternatives analysis, such as the Regional Port Analysis discussed below, without specifying any feasible alternatives that it believed should have been evaluated. DHEC Sept. 30, 2011 WQC Proposed Decision, at 5 and 9. In its January 25, 2011 letter, DHEC-OCRM also misstated the Corps’s alternatives analysis by claiming that it “does not consider other locations.” See Jan. 25, 2011 letter, CZM Objection, at 8. However, DHEC-OCRM did identify one potentially feasible alternative for analysis: the proposed Jasper Ocean Terminal. *Id.*

Any contention that the Corps did not evaluate regional port alternatives or a Jasper Ocean Terminal alternative is absolutely incorrect. The Corps performed a complete Regional Port Analysis, which is found in the Draft General Re-Evaluation Report, Appendix A, Attachment 3 (Final Report and two Interim Reports). The Regional Port Analysis specifically analyzed current and projected port capacity, demand, and growth, and environmental impacts and constraints for Charleston Harbor and a proposed Jasper Ocean Terminal, in addition to other South Atlantic ports (Norfolk, VA; Wilmington, NC; Savannah, GA; and Jacksonville, FL). *Id.*, Final Report, at 1-20; Interim Reports for more detail. In addition, the Corps

separately and thoroughly analyzed the Jasper Ocean Terminal proposed site in the Draft EIS Alternatives Analysis, as part of studying costs and environmental impacts at eight different locations along the Savannah River (four on the South Carolina side, four on the Georgia side). See DEIS, Sec. 3.0 and Appendix O.

DHEC also claims that the Corps improperly limited the project purpose to improving navigation in Savannah Harbor. Again, this is absolutely incorrect. Under the National Environmental Policy Act, the Clean Water Act, and South Carolina regulations,⁷ it is entirely proper for an applicant to propose a specific project, especially with regard to location. See, e.g., *Northwest Environmental Defense Center v. Wood*, 947 F.Supp. 1371 (D. Ore. 1996) (validating Hyundai's proposal to construct a large semiconductor fabrication plant in Eugene, Oregon); *Friends of the Earth v. Hintz*, 800 F.2d 822 (9th Cir. 1986) (validating Rayonier's proposal to expand a sawmill/sorting yard/log export complex in Gray's Harbor on Pacific coast of Washington); *Sylvester v. U.S. Army Corps of Engineers*, 882 F.2d 407 (9th Cir. 1989) (validating a land developer's proposal to build golf course at a resort in Squaw Valley, California). Not only may the applicant propose a specific project in a specific area, but the Corps has a "duty to consider the applicant's purpose." *Sylvester*, 882 F.2d at 409 (the Corps cannot change the applicant's purpose to one that it deems more suitable, such as constructing a facility "anywhere"); *Hintz*, 800 F.2d at 833-34 (the Corps's alternatives analysis must take into account the objectives of the applicant's project).

Under the Corps's NEPA regulations, an EIS is only required to "include a discussion of the reasonable alternatives which are to be considered by the ultimate decision-maker." 33 CFR

⁷ DHEC R. 30-1, para D. 23, states that feasibility is determined by the Department with respect to individual proposals, *i.e.*, starting with the applicant's project purpose. There is no requirement under South Carolina regulations for a permit applicant or federal agency to adopt any particular project purpose, much less one that an opponent argues for.

Part 325, App. B.7. An alternative that does not accomplish the purpose of the project in question is unreasonable, but agencies may not define the purpose of a project so narrowly as to preclude consideration of alternatives. *City of Bridgeton v. Federal Aviation Administration*, 212 F.3d 448, 456, 458 (8th Cir. 2000). The range of reasonable alternatives which an agency is required to consider is within its informed discretion. *Vermont Yankee Nuclear Power Corp. v. Natural Res. Def. Council, Inc.*, 435 U.S. 519, 551-52 (1978); *Poghiani v. United States Army Corps of Engineers*, 166 F.Supp.2d 673, 698 (N.D.N.Y. 2001). An agency's consideration of alternatives is sufficient if it considers an appropriate range of alternatives, even if it does not consider every available alternative. *Surfrider Foundation v. Dalton*, 989 F.Supp. 1309, 1327 (S.D. Cal. 1998). In cases involving a construction project, there are normally a finite number of tangible pieces of property that must be considered as alternative sites. *Id.*

In South Carolina a feasible alternative must be reasonable, taking into account the likelihood that it will achieve the project purpose, the cost of the alternative, and other factors – and it must reduce adverse consequences on water quality. See *League of Women Voters, et al. v. South Carolina DHEC, et al.*, 2008 WL 5416972, *9 (S.C. Admin. Law Judge, Dec. 15, 2008) and DHEC R. 30-1, para D.23, which states:

(23) Feasible (feasibility) - As used within these rules and regulations (e.g., "unless no feasible alternative exists"), feasibility is determined by the Department with respect to individual project proposals. Feasibility in each case is based on the best available information, including, but not limited to, technical input from relevant agencies with expertise in the subject area, and consideration of factors of environmental, economic, social, legal and technological suitability of the proposed activity and its alternatives. Use of this word includes, but is not limited to, the concept of reasonableness and likelihood of success in achieving the project goal or purpose. "Feasible alternatives" applies both to locations or sites and to methods of design or construction, and includes a "no action" alternative.

The last sentence of DHEC R. 30-1, para D.23, indicates that a proper feasible alternatives analysis includes analysis of alternative locations and sites, analysis of methods of

design or construction, and analysis of the no-action alternative. The Corps's alternatives analysis for SHEP fully complied with these principles. Originally, the local sponsor proposed the project with the purpose of improving navigation in Savannah Harbor. As stated above, the Corps had a duty to take that project purpose into account. In addition, the US Congress then authorized the specific project (subject to further study and approval by other federal agencies). 1999 Water Resources Development Act, Pub. L. No. 106-53, sec. 101(b)(9). Despite the specific Congressional authorization, the Corps still undertook a wide-ranging, multi-level alternatives analysis that included (1) the Regional Port Analysis (DGRR, Appendix A, Attachment 3), (2) a Multi-Port Analysis (DGRR, Appendix A, Attachment 5), (3) an analysis of a reasonable range of alternative locations or sites along the Savannah River (DEIS, sec 3.0 and Appendix O), (4) an analysis of six different depths of harbor deepening along the Savannah River (DEIS, sec. 3.0 and Appendix O)(methods of design or construction), and (5) the no-action alternative (DEIS, at 3-4 – 3-15).

The most relevant conclusions reached about the wide range of alternatives studied for SHEP are startlingly simple: (1) there is no feasible alternative to improving Savannah Harbor because the major South Atlantic ports will experience so much cargo growth from 2005 to 2050 they will all need deepening or improvement, (2) no one port could accommodate all the growth in container volume expected in the region, (3) the proposed deepening of Savannah Harbor would not take business from another port because the shipping cost efficiencies would not outweigh the additional landside transportation costs, and (4) it is simply not feasible to build a Jasper Ocean Terminal in lieu of improving Savannah Harbor for various reasons including the tremendous cost involved (\$4 billion), the environmental impacts, and the timing (Jasper does

not exist at present and cannot be constructed in time to meet the growth in demand Savannah and other South Atlantic ports are currently facing).

Moreover, South Carolina's Coastal Management Plan (SCCMP) specifically establishes a strong preference for developing ports in industrialized areas with existing infrastructure. *See* SCCMP, Part III, Transportation Facilities, at III-19 – III-20. This preference plus the high cost associated with developing a Jasper Ocean Terminal and the twenty years that will be required to study, permit, and construct that project, weigh heavily against finding a Jasper Ocean Terminal alternative to be feasible.

The Board should also consider a March 11, 2011 "Update" from the Jasper Ocean Terminal project office, attached hereto as Exhibit E. This Update contains numerous statements that SHEP is necessary and beneficial for the Jasper Ocean Terminal project (Ex. E, at 3, 12) ("The development of the Jasper site is predicated on the success of ports in Savannah and Charleston. A completed SHEP and the planned expansion of Charleston are the first steps . . ."). The Update states that the Jasper Ocean Terminal will handle container volumes in excess of what an improved (deepened) Savannah Harbor or Charleston Harbor could handle (Ex. E, at 3, 18). The Update also confirms that the Jasper Ocean Terminal will cost \$4 billion. Ex. E, at 18.

In light of the information provided in the Update, combined with the fact that Jasper Ocean Terminal would have its own environmental impacts requiring mitigation (Regional Port Analysis, DGRR, Appendix C, Attachment 3, Final Report, at 14-20, and associated Interim Reports), no one can seriously contend Jasper Ocean Terminal is presently a feasible alternative to SHEP. After extensive study, no other specific feasible alternative was identified or found,

either. The Corps is not required to do more than it has with regard to analyzing alternatives. The DHEC staff position criticizing the SHEP alternatives analysis is simply without merit.

V. ARCHAEOLOGICAL RESOURCE CONCERNS HAVE BEEN ADDRESSED.


The Draft Environmental Impact Statement includes an unsigned version of a Programmatic Agreement for Cultural Resources (Programmatic Agreement) designed to address all cultural resource issues. DEIS, Appendix G. DHEC staff advised the Corps that their concerns about archaeological resources would be satisfied once the Programmatic Agreement is signed by all parties including the South Carolina State Historic Preservation Officer (SHPO). After reviewing DHEC-OCRM's January 31, 2011 comments on cultural resource issues, conducting additional coordination with the Georgia and South Carolina SHPOs, and identifying the US Navy as an additional signatory, the Corps determined that all signatories were in agreement with the Programmatic Agreement provided it was revised to include the US Navy. the Corps has now revised the Programmatic Agreement to include the US Navy, signed it, and started the process of circulating it for signature to the Georgia and South Carolina SHPOs and the US Navy. Completion of this action should address the DHEC staff concerns and resolve this issue. the Corps recommends the Board include the following condition in an approved WQC/CZM certification: "To ensure compliance with coastal zone policies, the Corps shall promptly circulate the Programmatic Agreement for Cultural Resources in the Draft Environmental Impact Statement for the Savannah Harbor Expansion Project, Appendix G, as revised to include the US Navy, to the Georgia and South Carolina State Historic Preservation Officers, and the US Navy, in turn, for their signature."

CONCLUSION


For all the foregoing reasons, the concerns raised in the DHEC Staff Position have been fully addressed. The Board should approve the water quality certification, with appropriate conditions, and should concur with the federal coastal zone consistency determination.

Dated: November 9, 2011.

Respectfully submitted,



KEITH J. KLEIN (Oklahoma Bar #18285)
Attorney for US Army Corps of Engineers
Savannah District
100 W. Oglethorpe Ave.
Savannah, GA 31401
Telephone: (912) 652-5142
E-mail: keith.j.klein@usace.army.mil



JEFFREY M. HALL
Colonel, US Army
Commanding

McIntosh, Margaret (Mackie) SAS

From: Klein, Keith J SAS
Sent: Monday, December 05, 2011 7:24 AM
To: McIntosh, Margaret (Mackie) SAS
Subject: FW: Dkt No. 11-RFR-52 - Corps Filing - Response/Brief - EXHIBITS ATTACHED (UNCLASSIFIED)
Attachments: Corps Brief - DHEC - Ex A - DOE Consent Order.pdf; Corps Brief - DHEC - Ex B - DE Ltr re Dissolved Oxygen.pdf; Corps Brief - DHEC - Ex C - 2008 Mitigation Rule Analysis.pdf; Corps Brief - DHEC - Ex D - Biological Opinion Cover Ltr.pdf; Corps Brief - DHEC - Ex E - Jasper Ocean Terminal Update.pdf

Classification: UNCLASSIFIED
 Caveats: NONE

In case you want this one too.

Keith J. Klein
 Acting District Counsel
 Savannah District
 U.S. Army Corps of Engineers
 Telephone: 912.652.5142
 Blackberry: 912.547.3962

-----Original Message-----

From: Klein, Keith J SAS
Sent: Wednesday, November 09, 2011 1:53 PM
To: Lucas, Lisa M.
Cc: Okane, Jason D SAS
Subject: FW: Dkt No. 11-RFR-52 - Corps Filing - Response/Brief - EXHIBITS ATTACHED (UNCLASSIFIED)

Classification: UNCLASSIFIED
 Caveats: NONE

Ms. Longshore:

As noted in the e-mail I just sent (below), here are the exhibits for our Response/Brief. Please confirm receipt.

Please note that Exhibit C is 80 pages long. Again, if the size of some or all exhibits is too large to e-mail to the Board members today, we understand.

Also, we have made enough paper copies of our Response/Brief and the Exhibits to provide to each Board member tomorrow. Hopefully that will save you any printing and copying today. We will bring the materials with us by 10am and provide to you, or if you would like to receive them earlier, we could have someone bring them over. In that case, please let us know how you would like to handle it.

Keith J. Klein
 Acting District Counsel
 Savannah District
 U.S. Army Corps of Engineers
 Telephone: 912.652.5142
 Blackberry: 912.547.3962

-----Original Message-----

From: Klein, Keith J SAS
Sent: Wednesday, November 09, 2011 1:47 PM
To: 'Lucas, Lisa M.'
Cc: Okane, Jason D SAS
Subject: Dkt No. 11-RFR-52 - Corps Filing - Response/Brief (UNCLASSIFIED)

Classification: UNCLASSIFIED
Caveats: NONE

Ms. Longshore:

The US Army Corps of Engineers hereby files electronically the attached Response/Brief for the Final Review Conference tomorrow.

It is our understanding that if we filed this by 2 pm you would send it to the Board members today, and we request that you do so.

There are five exhibits that accompany the Response/Brief. Due to their size, I am going to e-mail them separately. If you do not think you can transmit the exhibits to the Board members with the Response/Brief today, it is okay with us if you just send the Response/Brief.

If you would kindly reply that you received this e-mail we would appreciate it. Thank you very much.

Keith J. Klein
Acting District Counsel
Savannah District
U.S. Army Corps of Engineers
Telephone: 912.652.5142
Blackberry: 912.547.3962

Classification: UNCLASSIFIED
Caveats: NONE

Classification: UNCLASSIFIED
Caveats: NONE

Classification: UNCLASSIFIED
Caveats: NONE

**STATE OF TENNESSEE
DEPARTMENT OF ENVIRONMENT AND CONSERVATION**

IN THE MATTER OF: U.S. DEPARTMENT OF ENERGY) RESPONDENT	))))))	DIVISION OF SOLID WASTE MANAGEMENT NO. 99-0438 DOCKET NO. 04.27-007507A
--	----------------------------	--

CONSENT ORDER

Upon the consent of the Commissioner and the United States Department of Energy (hereinafter "DOE"), this matter came before the Solid Waste Disposal Control Board. After consideration of the Commissioner's Order and the Respondent's Petition for Review, the Board made the following findings of fact and conclusions of law.

FINDINGS OF FACT AND CONCLUSIONS OF LAW

1. On November ____, 1999, Commissioner's Order No. 99-0438 was duly served upon DOE. Said Order is attached hereto as Exhibit A and incorporated herein by reference. The referenced Order was timely appealed by DOE to this Board for its review. The petition for review is also attached hereto as Exhibit B and incorporated herein by reference. The Respondent has raised, in the petition for review, various legal issues in challenging the Commissioner's Order, but agrees to accept the provisions of this Consent Order as a settlement of the matters in controversy, without waiving, and specifically preserving, any and all defenses DOE may have with respect to the Commissioner's Order. This Consent Order shall not be construed as an admission or evidence of any liability and shall not be used for any other purpose or in any judicial or administrative proceeding.

except for a proceeding brought by a party for the purpose of enforcing the terms and conditions herein.

ORDER

WHEREFORE, PREMISES CONSIDERED, the Board approves the parties' Stipulations and Orders that:

1. In settlement of the current controversy, DOE shall pay TDEC the sum of fourteen million dollars (\$14,000,000). This sum shall be payable in fourteen (14) equal and consecutive annual installments, with each installment to be paid before September 30 of each year, with the first installment due by September 30, 2000 and the last installment due by September 30, 2013. By written mutual agreement, the DOE Group Leader, ORR Remediation Management Group and the TDEC Director, DOE Oversight Division may modify the schedule and amount of the installments required by this paragraph. Refusal of either official to agree to modify the schedule and amount of the installments shall not be subject to challenge in any forum by any person.

2. TDEC shall deposit the payments in the pooled investment fund established by T.C.A. §9-4-603. The payments shall be invested and managed in accordance with T.C.A. §9-4-602, §9-4-603, and the policy guidelines duly adopted pursuant to the authority of T.C.A. §9-4-602. The Fund shall be otherwise managed and administered in accordance with the Fund Implementation Plan, attached hereto as Exhibit C and incorporated herein by reference.

3. The payments made pursuant to paragraph 1. of this Order shall satisfy any requirement for DOE or its contractors to make future payments, based (in whole or in part) on the authority of T.C.A. §68-212-108, with respect to the EMWMF, including disposal of wastes at the EMWMF for future response actions.

4. It is DOE's position that any requirement for the payment or obligation of funds by DOE established by the terms of this Consent Order, including the Fund Implementation Plan, is subject to the availability of appropriated funds, and that no provision of this Consent Order, including the Fund Implementation Plan, should be interpreted to require the obligation or payment of funds in violation of the Anti-Deficiency Act, 31 USC Section 1341, as amended.

5. It is TDEC's position that the federal Anti-Deficiency Act, 31 USC Section 1341, does not apply to any obligations set forth under this Consent Order or the Fund Implementation Plan. If appropriated funds are not available to fulfill DOE's obligations under this Consent Order, including the Fund Implementation Plan, DOE shall meet promptly with TDEC representatives to discuss whether the parties can reach an accommodation on adjustments to requirements involving the payment or obligation of such funds. If no agreement can be reached, then the TDEC and DOE agree that in an action by the TDEC to enforce any provision of this Consent Order, including the Fund Implementation Plan, the DOE may raise as a defense that its failure or delay was caused by the unavailability of appropriated funds. The TDEC disagrees that the lack of appropriations or funding is a valid defense. However, the TDEC and DOE agree and stipulate that it is premature at this time to raise and adjudicate the existence of such a defense.

6. Nothing in this Consent Order shall be construed as modifying the Oak Ridge Federal Facilities Agreement. In the event that the Fund is insufficient to perform Surveillance and Maintenance for the EMWMF, DOE retains its responsibility pursuant to CERCLA.

REASONS FOR DECISION

The Board encourages settling cases in the interest of avoiding the time and expense of prolonged litigation. The approval of the parties' agreement protects the environment and is in the best interests of the public.

Adopted and approved by a majority of the Board, a quorum being present, this ____ day of _____, 1999.

FOR THE SOLID WASTE DISPOSAL CONTROL BOARD

James P. Newman, Chairman

APPROVED FOR ENTRY:

Nancy Carnes, BPR #009383
Assistant Chief Counsel for Environment
Attorney for U.S. Department of Energy
Office of Chief Counsel
U.S. DOE, Oak Ridge Operations Office

E. Joseph Sanders, BPR #006691
General Counsel
Tennessee Department of Environment
and Conservation

Tenn. Code Ann. § 4-5-316 gives a party the right to submit to the Board a petition for a Stay of Effectiveness of a FINAL ORDER within seven (7) days after its entry.

Tenn. Code Ann. § 4-5-317 gives any party the right to file a Petition for Reconsideration within ten (10) days after the entry of a FINAL ORDER, stating specific grounds upon which relief is requested.

T.C.A. §§ 4-5-322 and 68-212-113 provide any party the right of judicial review by filing a Petition in the Chancery court of Davidson County within sixty (60) days of this ORDER becoming effective.

DOE understands the aforementioned rights and knowingly and voluntarily waive these rights as to this Consent Order.

A copy of this FINAL ORDER shall be served upon the DOE by certified mail, return receipt requested. This Final Order shall become effective upon entry.

Filed in the Administrative Procedures Division, Office of the Secretary of State, on
this ____ day of _____, 1999.

Charles C. Sullivan, II, Director
Administrative Procedures Division

CERTIFICATE OF SERVICE

The undersigned hereby certifies that a true and correct copy of this document has
been served upon all interested parties by placing a true and correct copy of the same in the
United States mail postage prepaid. This ____ day of _____,
1999.

E. Joseph Sanders
Tennessee Department of Environment
and Conservation

DOE/Stewardship/Consent Order 10-22-99.doc



REPLY TO
ATTENTION OF:

DEPARTMENT OF THE ARMY
SAVANNAH DISTRICT, CORPS OF ENGINEERS
100 W. OGLETHORPE AVENUE
SAVANNAH, GEORGIA 31401-3640

November 4, 2011

Executive Office

Mr. David Wilson
South Carolina Department of
Health and Environmental Control
2600 Bull Street
Columbia, South Carolina 29201

Dear Mr. Wilson:


Thank you for meeting with Savannah District last Friday to discuss potential resolution of key issues regarding water quality certification and coastal zone consistency. At the meeting, my office agreed to further consider ways of addressing DHEC's concerns regarding operation and maintenance of the project's dissolved oxygen (DO) injection system.

The proposed Speece Cone technology has been used in other applications worldwide for 30 years and underwent rigorous on-site testing in Savannah Harbor during 2007. The DO system design for Savannah Harbor already includes reserve capacity and an operational back-up unit at each of two installation locations. The estimated life of the cones and lines is 40 years and the estimated life of the controls, oxygen generator, and pumps is 20 years (Draft General Re-Evaluation Report, page 236). During construction, there will be a Transfer Efficiency Study to optimize the DO system. During the project's 10-year post-construction monitoring period, needed adjustments and modifications to the DO system will be included in the project's \$18 million Adaptive Management plan (Draft Environmental Impact Statement, Appendix D, pages 33-34). Successful installation, operation, and maintenance of the DO system is already or will be a requirement of several approvals for the project, including Georgia's water quality certification and the National Marine Fisheries Service Biological Opinion.

In addition, the Corps is making the following commitments to address DHEC's concerns. First, the project Record of Decision will expressly recognize a binding commitment to install, operate, and maintain the DO system in accordance with the project mitigation plan, subject to Congressional appropriation of funds for the project. Second, the Savannah District will make the DO system a top priority for annual operation and maintenance (O&M) funds appropriated and received for the project, above normal maintenance requirements.

We believe that the information and commitments in this letter should satisfactorily resolve the remaining DO system issues.

Sincerely,



Jeffrey M. Hall
Colonel, US Army
Commanding

VII Consideration of the USEPA/USACE Mitigation Rule

The USACE evaluated the proposed project mitigation with respect to the Mitigation Rule, which was jointly established by the USEPA and USACE and published in the Federal Register on April 10, 2008. Upon review of the rule, the USACE has determined that the proposed project mitigation conforms to its intent, as well as the requirements identified in 33 CFR Chapter II, Part 332. The following sections provide an assessment of the USACE's preferred mitigation alternatives specific to the Mitigation Rule.

A.

Characterization of the Lower Savannah River Watershed: The Lower Savannah Watershed is identified by Hydrologic Unit Code (HUC) 03060109. The watershed is approximately 377,000 acres in size and includes portions of Georgia and South Carolina. The Savannah River constitutes the primary drainage feature within the 8-digit HUC watershed, with limits that extend from southern Screven County, Georgia, and Allendale County, South Carolina, to the mouth of the river located between Chatham County, Georgia, and Jasper County, South Carolina. North of Interstate 95 (I-95), the watershed is primarily rural and dominated by agricultural entities. Similar land use trends are also located south of I-95 in South Carolina. However, Chatham and portions of Effingham Counties have experienced considerable urbanization over the last 20 years. A review of data reported by the University of Georgia suggests high intensity urbanization rates within the Lower Savannah Watershed of approximately 260 acres/year (<http://narsal.uga.edu/glut/watershed.php?watershed=27>), with a predominant amount occurring in Chatham and Effingham Counties. Savannah Harbor and those areas in Georgia adjacent to harbor are primarily dominated by industrial and/or commercial activities. The Georgia Ports Authority (GPA) presently operates the Ocean Terminal and Garden City Terminal in Savannah. In addition, approximately 13 other entities also maintain shipping terminals within the harbor. Please see Section 4 for an additional information concerning characterization of the project area and the Savannah Harbor.

Land use trends within the watershed have also been evaluated with respect to changes in wetland acreage. From 1985 to 2005, the quantity of wetlands within the Lower Savannah Watershed decreased. The table illustrated below was obtained from the University of Georgia's Natural Resources Spatial Analysis Lab (NARSAL) and illustrates the relative decline of wetlands located within the watershed (<http://narsal.uga.edu>).

Land Use Cover (Acres)	Year				
	1985	1991	1998	2001	2005
Forested Wetland	126,480	125,398	112,996	106,818	99,290
Non-Forested Wetland (Salt)	3,751	2,954	2,873	2,334	2,235
Non-Forested Wetland (Fresh)	3,788	3,234	4,057	2,229	2,675

All three classifications of wetlands can be found adjacent to the Savannah Harbor. The harbor contains brackish marsh wetlands that are principally dominated by *Spartina alterniflora* and *Spartina cynosuroides* species. Additionally, tidal freshwater wetlands can be found north of the Savannah Harbor and in close proximity to the Savannah National Wildlife Refuge. Please see Section 4 and Appendix C III and IV for greater detail concerning wetlands located within the project review area.

Non-point Source Discharges: Residential, commercial and industrial development increase the amount of impervious surfaces (roof tops, paved roads, parking lots, etc.), which affects storm water discharges. Development increases non-point source contaminant loading through associated increases in urban landscaping (pesticides and fertilizers), increased traffic (oil, grease and metals), and other associated activities. As the amount of impervious surfaces increase, an incremental increase in adverse impacts to water quality would be expected. That would occur independent of a harbor deepening project. The following table is a summary of anticipated population growth and the associated increase in impervious surfaces in the Lower Savannah Watershed. The amount of impervious surface coverage is increasingly recognized as a valuable predictor of overall water quality within a watershed. In general, as population increases, so does impervious surface. As impervious surface area increases, water quality decreases. The table below illustrates population and impervious surface area growth over time for the Lower Savannah River Basin.

The impervious surface data was generated by the US Environmental Protection Agency and provided to the USACE via a table titled "Total Impervious Area Calculations by 12-Digit Hydrologic Unit Code Watershed (based upon National Land Cover Data, 1993). Using simple linear regression analysis, the USACE used county population projection data to estimate the percent increase in impervious surface, by county. The data contained in the table below indicates that as the population of each county continues to increase, there will be an associated increase in impervious surfaces. Two counties in the study area, Chatham and Effingham, would be anticipated to experience an increase of less than one percent impervious surface by the year 2020. The other four counties in this area are expected to experience an increase of less than 0.5 percent impervious surface. Each county is responsible for regulating non-point source storm water discharges pursuant to Section 402 of the Clean Water Act. These county storm water management programs should help minimize the anticipated adverse impacts to water quality.

**Projected Population Growth and Projected Increases in
Percent Impervious Surface Coverage**

COUNTY		2000	2005	2010	2020
Chatham(GA)	Population	232,048	239,861	249,748	265,006
	% Impervious Surface	8.64	8.88	9.18	9.63
Effingham (GA)	Population	37,535	46,515	53,652	68,544
	% Impervious Surface	2.81	3.08	3.29	3.74
Screven (GA)	Population	15,374	15,172	15,639	16,387
	% Impervious Surface	2.14	2.14	2.15	2.17
Allendale (SC)	Population	11,211	10,727	10,237	9,304
	% Impervious Surface	2.02	2.02	2.02	2.02
Hampton (SC)	Population	21,386	20,982	22,116	23,613
	% Impervious Surface	2.32	2.31	2.35	2.39
Jasper (SC)	Population	20,678	21,122	23,559	27,362
	% Impervious Surface	2.30	2.32	2.39	2.50

Using best available data, the USACE identified a historical listing of Section 303(d) listed waters within the Lower Savannah Watershed. A more detailed explanation of the results can be found at the following website: (http://cfpub.epa.gov/surf/huc.cfm?huc_code=03060109). The Table below illustrates the named water, pollutant and listed cause of impairment for those Section 303(d) listed waters.

Section 303(d) Listed Waters in the Lower Savannah Watershed (HUC 0306019)		
Named Water	Pollutant	Listed Cause of Impairment
Buck Creek	Cyanide, Zinc, and Toxicity	Cyanide, Zinc, and Toxics
Ebenezer Creek	BOD and pH	Organic Enrichment/Low Dissolved Oxygen, pH
Savannah Harbor	BOD, Oxygen Demand	Dissolved Oxygen
Savannah River	Mercury	Fish Consumption Guidance
Savannah River Basin	BOD, Oxygen Demand, Fecal Coliform	Dissolved Oxygen, Fecal Coliform

In October 2006, the EPA finalized a TMDL for Savannah Harbor to satisfy a consent decree obligation established in *Sierra Club v. EPA*, Civil Action No. 94-CV-2501-MHS (N.D.GA). In summary, the TMDL concluded that Savannah River cannot accept anthropogenic oxygen-demanding substances and still provide acceptable habitat for critical aquatic life that reside in those reaches of the river. This finding means that the States will have to revise their permits for point source discharges in those reaches as they expire and come up for renewal. As part of its analysis, EPA evaluated the dissolved oxygen requirements for several different fish species and the natural conditions for the river.

In 2009, the State of Georgia revised its DO standard for Savannah Harbor. The new standard calls for a daily average in the dissolved oxygen to be no less than 5.0 mg/L throughout the year, with an instantaneous minimum of 4.0 mg/L. These new standards apply throughout the water column and they match the South Carolina standard for waters of the same use classification.

In April 2010, EPA issued a Draft Revised TMDL for DO in Savannah Harbor. They established a TMDL target of 0.1 mg/l DO deficit from natural conditions. EPA provided a "TMDL Calculator" that could be used to identify the effect of individual point source discharges on DO levels in the river. The States are working with industries to develop an acceptable load distribution plan to meet EPA's overall target. EPA hopes to finalize the TMDL in 2012.

The effects of the proposed Expansion Project on DO levels in the Savannah Harbor have been evaluated. Please see Section 4 and Appendix C, Sections IV and VI for more detailed information concerning impacts to DO and the associated mitigation.

B. Functional Assessment of Wetland Impact Areas

1.0 Indirect Impacts to Wetlands

Indirect impacts associated with the proposed deepening would result in a vegetative shift to 337 acres of freshwater marsh and 730 acres of saltmarsh (48-foot depth alternative). The Corps used the EFDC model to evaluate both existing stream salinity levels and salinity levels that would occur with the various channel deepening alternatives in place. However, the EFDC model does not directly predict marsh salinity. Consequently, determining the existing wetland species composition in the estuary, as well as predicting how these species would change with the various channel deepening alternatives, was accomplished using a method where riverine surface salinity levels are extrapolated across the adjacent marshes. This method creates contours that divide the marsh into 5 salinity categories: 0-0.5 ppt, which is considered freshwater, 0.6-1.0 ppt, 1.1-2.0 ppt, 2.1-4.0 ppt, and >4.0 ppt (See Section 5, "Consequences of the Proposed Action" – Section 5.01.2 of the FEIS). In turn, distinctions between marsh types and acreage were defined based on the following salinity ranges: (0-0.5 ppt) Freshwater Marsh, (0.6-4 ppt) Brackish Marsh, and (>4ppt) Saltmarsh.

The results of our functional assessment concluded that the differentiation between salt marsh and brackish marsh recommended by the Wetland Interagency Coordination Team and used in the DEIS was somewhat constrained. The salinity range used in the SHEP to differentiate between brackish marsh (0.6-4 ppt) and salt marsh (> 4ppt) was quite restrictive, given that brackish marsh salinities have been reported with a range from 0.5-10 ppt (NOAA, 2010) and in other estuarine systems from 0.5-17 ppt (Judd and Lonard, 2004). An earlier assessment of wetland vegetation coinciding with the salinity range reported for brackish marsh systems (i.e., 5-10 ppt) which occur within the area of potential effect, also supports those findings. Thus, the salinity range used to quantify salt marsh in the area of potential effect (i.e., > 4 ppt) over estimated the amount of saltmarsh in the system and under estimated the amount of brackish marsh. As such, the described conversion of salt marsh to brackish marsh, which would occur as a result of harbor deepening, would likely be much less if one takes into account vegetative characteristics for wetland environments with associated salinities that are more commonly associated with a brackish marsh (i.e., range between 5 and 10 ppt).

Given the wide range of salinity reported in literature for brackish marsh systems, the inherent variability in salinity that exists for all estuarine systems, and the modeling results that report post-deepening salinity concentrations consistent with the aforementioned range, Savannah District concludes that the 730-acre calculated conversion of saltmarsh to brackish marsh if the harbor is deepened to 48-feet is likely an exaggerated value, with actual vegetative shifts unlikely to be identifiable *in situ* in Savannah. That said, the District was inclusive in its assessment of the potential for project-related effects and elected to include the saltmarsh and brackish marsh conversion in its calculation of minor impacts.

The conversion of 337 acres of freshwater wetland to brackish marsh represents the only significant wetland conversion that is likely to be noticeable if the harbor is deepened to 48-feet as proposed. Again, it is important to reiterate that the ecological values of the impacted 337 acres of freshwater wetlands would not be completely lost. Instead, those acres would be converted to brackish marsh. The Corps' calculation of the number of acres of freshwater wetland that have the potential to be converted to brackish marsh is based on a shift in the location of 0.5 ppt salinity, a traditional rule-of-thumb for differentiating between freshwater marsh and brackish marsh. However, data reported in the literature for Savannah Harbor suggest that a shift in vegetation (from freshwater marsh to brackish marsh) in this estuary does not occur until salinity concentrations approach 2.5 ppt (Latham et al., 1994). Even at oligohaline marsh sites with average salinity concentration of 2.1 ppt, a discriminant function (DF) analysis revealed that only 47% of cases resulted in the correct pairing of environmental variables with vegetative species composition and dominance. At those same oligohaline sites, 37% of the vegetative species composition and dominance were more closely aligned with a freshwater classification (Latham et al., 1994).

Deepening the harbor to a 48-foot depth would result in a conversion of the dominant vegetative species typically observed in approximately 337 acres of freshwater marsh (freshwater to brackish marsh scenario). It is important to note that many of the emergent plant species associated with freshwater marsh systems would still be readily observed in environments that have been defined as brackish marsh (Latham et al., 1994). Likewise, the 48-foot depth would result in a conversion of the dominant vegetative species typically observed in 730 acres of saltmarsh (saltmarsh to brackish marsh scenario), and dominant saltmarsh species like *Spartina alterniflora* would still be observed in areas which have salinities that define a brackish marsh. However, the overall basic wetland functions typically associated with these systems would not change. A comparison of potential changes in elements of wetland function for both conversion scenarios is provided in the following table.

Changes in Wetland Function as a Result of Wetland Conversion

Elements of Wetland Function	Freshwater to Brackish Marsh (Approximately 337 acres)	Saltmarsh to Brackish Marsh (Approximately 730 acres)
Water Purification	Negligible	Negligible
Flood Protection	Negligible	Negligible
Shoreline Stabilization	Negligible	Negligible
Groundwater Recharge	Negligible	Negligible
Streamflow Maintenance	Negligible	Negligible
Retention of Particles	Negligible	Negligible
Surface Water Storage	Negligible	Negligible
Subsurface Storage	Negligible	Negligible
Nutrient Cycling	Negligible	Negligible
Values to Society	Negligible	Negligible
Fish and Wildlife Habitat	Minor Adverse	Negligible

- **Negligible Effect** – the effect on the resource would be at the lowest levels of detection, barely measurable, with no perceptible consequences, either adverse or beneficial, to the resource.
- **Minor Effect** – the effect on the resource is measurable or perceptible, but it is slight.
- **Adverse Effect:** the action is contrary to the interest or welfare of the resource; a harmful or unfavorable result

As illustrated in Table 1, the only indirect effect the 48-foot project would have on the function of these wetlands systems would be associated with fish and wildlife habitat. All other elements of wetland function associated with predicted shifts in wetlands classification would be negligible as a result of the anticipated increase in salinity. It should be noted that areas of the Savannah Harbor identified as saltmarsh or brackish marsh support similar fish and wildlife species (Jennings and Weyers, 2003). Any anticipated conversion of saltmarsh to a brackish marsh system would have a negligible impact on the overall function of the wetland system. The USACE recognizes that a comparison of fish and wildlife habitat between freshwater and brackish marsh systems yields fewer similarities. However, the conversion in fish and wildlife habitat will still be minor when considering the total function of the wetland and continued existence of some freshwater vegetation after deepening in wetland areas that would be classified as brackish marsh.

2.0 Direct Impacts to Wetlands

The harbor deepening project would also result in direct impacts to 15.68 acres of saltmarsh. It should be noted that these impacts would result after all possible avoidance and minimization measures have been used. In brief, these marsh areas are subject to periodic flooding as a result of daily tides and the vegetative communities in these areas generally consist of one plant species, which is a smooth cordgrass known as *Spartina alterniflora*. Approximately 7.3 acres (47%) of the total saltmarsh acreage that would be excavated is subject to the wave action of passing ships and the resulting perturbation. Thus, these areas exhibit vegetation densities which are significantly less than what is typically observed in a pristine marsh. Patches of bare, coarse-grain sand and mudflat are integrated throughout the patches of *Spartina alterniflora* in these locations. Given the sparse presence of vegetation, it would appear that these areas are challenged, somewhat degraded, and do not possess the same degree of primary productivity as observed in robust, densely-vegetated, saltmarsh systems located throughout coastal Georgia.

C. Functional Assessment of Mitigation Areas

1.0 Assessment of Preservation Area used to Mitigate for Indirect Impacts

The latest version of the Refuge's Acquisition Plan is dated July 2007 and is included in the document titled "Final Environmental Assessment and Land Protection Plan; Proposed Expansion of Savannah National Wildlife Refuge (SNWR)". The document characterizes the lands proposed for preservation in the areas identified as Mill Creek and Abercorn Island. On March 12, 2011, USFWS representatives provided the following community descriptors for Mill Creek and Abercorn Island; the two areas that will be used to obtain the preservation sites. The

properties that comprise the Mill Creek and Abercorn Island areas are characterized by primarily wetlands and a few upland pockets. The Mill Creek Area is comprised of wetlands characterized by Ecosystem CES 203.066/Alliance A.292 and CES 203.66/Alliance A.345, which total 4,900 acres (Figure 46). Similarly, the Abercorn Island area is composed of Ecosystem CES 203.240/Alliance A.357 and CES 203.242/Alliance A.375, which total 1,989 acres (Figure 47).

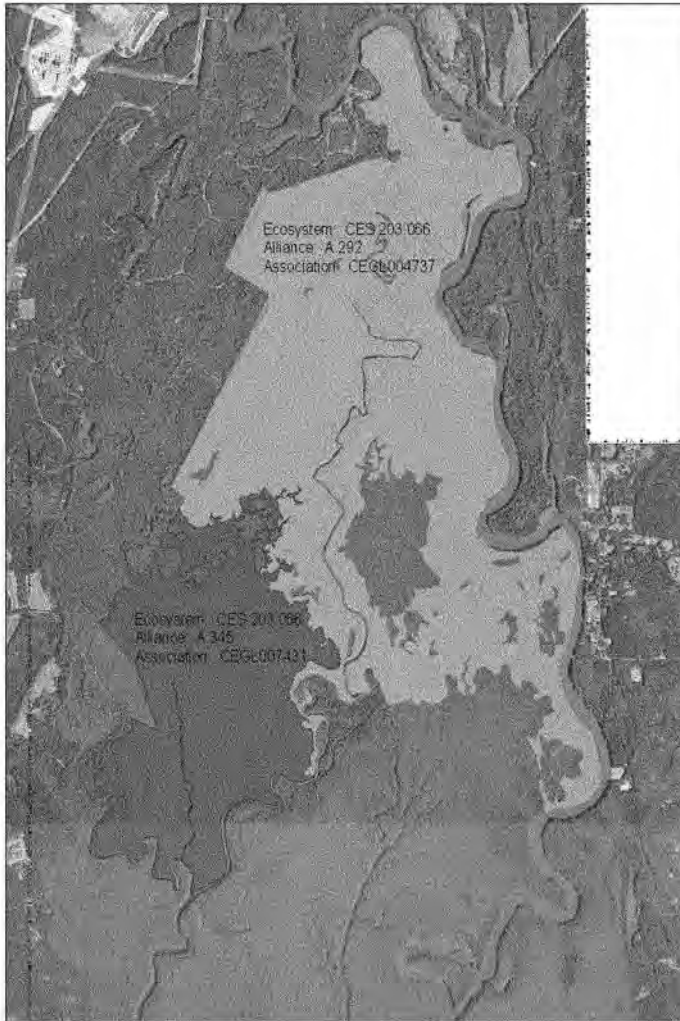


Figure 46

1.1 Ecosystem CES203.066: Southern Atlantic Coastal Plain Large River Floodplain Forest

Summary: This system represents a geographic subset of Kuchler's (1964) Southern Floodplain Forest. Examples may be found along large rivers of the Atlantic Coastal Plain, especially the Roanoke, Great Pee Dee, Congaree/Santee, Savannah, and Altamaha rivers. Several distinct plant communities can be recognized within this system that may be related to the array of different geomorphologic features present within the floodplain. Some of the major geomorphic features associated with different community types include natural levees, point bars, meander scrolls, oxbows, and sloughs (Sharitz and Mitsch 1993). Vegetation generally includes forests dominated by bottomland hardwood species and other trees tolerant of flooding. However, herbaceous and shrub vegetation may be present in certain areas as well.

1.1A Alliance: A. 292 *Quercus* (phellos, nigra, laurifolia) Temporarily Flooded Forest Alliance

Forests in this alliance are typically dominated by some combination of *Quercus phellos*, *Quercus nigra*, and/or *Quercus laurifolia*. They may be found throughout the Coastal Plain and adjacent areas of the lower Piedmont, Arkansas Valley, Interior Low Plateau, and the Ouachita Mountains in temporarily flooded environments. These forests may occur in large, relatively high-gradient floodplains (in which they tend to occur on topographically higher portions of the floodplain, such as ridges or terraces), or in small, relatively low-gradient floodplains (in which the landforms are too small and/or too poorly developed to create much consistent, local topographic relief). In the Atlantic and East Gulf coastal plains, these forests may occur more often in association with blackwater / low-sediment / low-nutrient rivers and streams than brownwater ones. They occur on very acidic to mildly alkaline soils, commonly on Portland, Tensas, and Hebert silt loams. Dominant and associated species vary with geographic location and landscape setting. Associated canopy species include *Quercus texana*, *Fraxinus pennsylvanica*, *Pinus taeda*, *Quercus similis*, *Quercus michauxii*, *Magnolia virginiana*, *Pinus glabra*, *Liquidambar styraciflua*, *Acer rubrum*, *Nyssa biflora*, *Ulmus alata*, *Carya aquatica*, *Carya alba*, *Carya glabra*, *Quercus pagoda*, *Taxodium distichum*, and *Celtis laevigata*. Subcanopy and shrub species include *Halesia diptera*, *Carpinus caroliniana*, *Ilex decidua*, *Sebastiania fruticosa*, *Ostrya virginiana*, *Viburnum rufidulum*, *Diospyros virginiana*, *Itea virginica*, *Symplocos tinctoria*, *Rhododendron canescens*, *Illicium floridanum*, *Cyrilla racemiflora*, *Ilex verticillata*, *Crataegus viridis*, *Vaccinium elliotii*, and *Ilex opaca*, among others. Woody vines are an important component of these forests; species include *Toxicodendron radicans*, *Bignonia capreolata*, *Smilax rotundifolia*, *Vitis rotundifolia*, *Parthenocissus quinquefolia*, *Trachelospermum difforme*, *Berchemia scandens*, *Smilax glauca*, *Campsis radicans*, *Cocculus carolinus*, *Ampelopsis arborea*, and others. This alliance also includes forests of large bottomlands dominated by *Quercus phellos* and *Ulmus crassifolia* that occur on flat ridges and grade up from forests dominated by *Quercus lyrata* and *Carya aquatica*. Characteristic canopy species include *Pinus taeda*, *Quercus similis*, *Liquidambar styraciflua*, *Gleditsia triacanthos*, and *Carya aquatica*, but the wettest sites likely will have only *Quercus phellos* and *Ulmus crassifolia*. Understory species include *Ilex decidua*, *Viburnum dentatum*, and *Crataegus* spp., with *Sabal minor* in drier sites.

Vegetation Summary: Stands of this alliance are typically dominated by some combination of *Quercus phellos*, *Quercus nigra*, and/or *Quercus laurifolia*. Dominant and associated species vary with geographic location and may include *Quercus texana*, *Fraxinus pennsylvanica*, *Pinus taeda*, *Quercus similis*, *Quercus michauxii*, *Magnolia virginiana*, *Pinus glabra*, *Liquidambar styraciflua*, *Acer rubrum*, *Nyssa biflora*, *Halesia diptera*, *Ulmus alata*, *Carya aquatica*, *Carya alba*, *Carya glabra*, *Quercus pagoda*, *Taxodium distichum*, and *Celtis laevigata*. Subcanopy and shrub species include *Carpinus caroliniana*, *Ilex decidua*, *Sebastiania fruticosa*, *Ostrya virginiana*, *Viburnum rufidulum*, *Diospyros virginiana*, *Itea virginica*, *Symplocos tinctoria*, *Rhododendron canescens*, *Illicium floridanum*, *Cyrilla racemiflora*, *Ilex verticillata*, *Crataegus viridis*, *Vaccinium elliotii*, and *Ilex opaca*, among others. Woody vines are an important component of these forests; species include *Toxicodendron radicans*, *Bignonia capreolata*, *Smilax rotundifolia*, *Vitis rotundifolia*, *Parthenocissus quinquefolia*, *Trachelospermum difforme*, *Berchemia scandens*, *Smilax glauca*, *Campsis radicans*, *Cocculus carolinus*, *Ampelopsis arborea*, and others. This alliance also includes forests of large bottomlands dominated by *Quercus phellos* and *Ulmus crassifolia* that occur on flat ridges and grade up from forests dominated by *Quercus lyrata* and *Carya aquatica*. Characteristic canopy species include *Pinus taeda*, *Quercus similis*, *Liquidambar styraciflua*, *Gleditsia triacanthos*, and *Carya aquatica*, but the wettest sites likely will have only *Quercus phellos* and *Ulmus crassifolia*. Understory species include *Ilex decidua*, *Viburnum dentatum*, and *Crataegus* spp., with *Sabal minor* in drier sites.

Environmental Summary: Forests in this alliance occur primarily along blackwater or low-sediment / low-nutrient rivers and small streams in the Atlantic Coastal Plain, lower Piedmont, Arkansas Valley, East Gulf Coastal Plain, West Gulf Coastal Plain, Interior Low Plateau, and the Ouachita Mountains in temporarily flooded environments. These forests may occur in large, relatively high-gradient floodplains (in which they tend to occur on topographically higher portions of the floodplain, such as ridges or terraces), or in small, relatively low-gradient floodplains (in which the landforms are too small and/or too poorly developed to create much consistent, local topographic relief). They occur on very acidic to mildly alkaline soils, commonly on Portland, Tensas, and Hebert silt loams.

Association: CEG004737 *Quercus laurifolia* - *Quercus lyrata* / *Carpinus caroliniana* - *Persea palustris* / *Vaccinium elliotii* Forest

Summary: This community type covers forests of low blackwater bottomland river terraces and ridges, in the Atlantic Coastal Plain of the Carolinas and possibly Virginia. This type may have a somewhat longer hydroperiod than other types in this or other temporarily flooded alliances, but it is not seasonally flooded. It is distinguished from some related types by lacking a significant component of levee species. The canopy is dominated by *Quercus laurifolia* and *Quercus lyrata*. The subcanopy characteristically contains *Carpinus caroliniana* and *Persea palustris*. One prominent shrub is *Vaccinium elliotii*. Additional floristic information is needed. Stands of this community have a significant component of *Quercus lyrata* and generally lack a significant component of *Pinus taeda*.

Vegetation Summary: The canopy of this association is dominated by *Quercus laurifolia* and *Quercus lyrata*. The subcanopy characteristically contains *Carpinus caroliniana* and *Persea palustris*. One prominent shrub is *Vaccinium elliotii*. Additional floristic information is needed. Stands of this community have a significant component of *Quercus lyrata* and generally lack a significant component of *Pinus taeda*.

Environmental Summary: This community occurs on low blackwater bottomland river terraces and ridges, in the Atlantic Coastal Plain of the Carolinas and possibly Virginia. This type may have a somewhat longer hydroperiod than other types in this or other temporarily flooded alliances, but it is not seasonally flooded.

1.1B Alliance: A.345 -*Nyssa aquatica* - (*Taxodium distichum*) Semipermanently Flooded Forest Alliance

Summary: This alliance encompasses semipermanently flooded forested riverine swamps dominated by *Nyssa aquatica*, with or without *Taxodium distichum* as a codominant. Stands of this alliance may vary in composition from ones largely dominated by *Nyssa* to ones dominated by a mix of *Taxodium*, *Nyssa*, and other hardwood species. Dominance of *Nyssa* may vary conceptually from 100-25%. Dominance of *Taxodium* may vary from less than 75% to absent. Other canopy and subcanopy species may include *Nyssa biflora*, *Quercus lyrata*, *Carya aquatica*, *Fraxinus profunda*, *Fraxinus caroliniana*, *Planera aquatica*, and *Populus heterophylla*. Shrubs and herbs are typically limited to tree bases, fallen logs, and other elevated places in the stand. *Itea virginica* is often the only shrub present. Herbaceous species may be absent and often are sparse. Species present can include *Phanopyrum gymnocarpon* (= *Panicum gymnocarpon*), *Pluchea camphorata*, *Boehmeria cylindrica*, *Rudbeckia laciniata*, *Sagittaria latifolia*, *Onoclea sensibilis*, *Triadenum walteri*, *Carex joorii*, *Carex glaucescens*, *Proserpinaca pectinata*, *Asclepias perennis*, *Saururus cernuus*, *Justicia ovata*, *Leersia lenticularis*, and others. Associations in this alliance occur in backwater sloughs, low wet flats, swales and backswamps, and along blackwater streams and other alluvial settings. Related vegetation associated with artificial lakes and millponds are accommodated in another alliance, *Taxodium distichum* - (*Taxodium ascendens*) Seasonally Flooded Lakeshore Woodland Alliance (A.652). Surface water is present throughout the growing season in most years. Forests in this alliance occur virtually throughout the Atlantic and Gulf coastal plains and the Mississippi River Alluvial Plain within the range of *Nyssa aquatica*, and in the Arkansas River Valley; also reported from the Mobile and Tensaw rivers in Alabama.

Vegetation Summary: This alliance occurs virtually throughout the Atlantic and Gulf coastal plains and the Mississippi River Alluvial Plain within the range of *Nyssa aquatica*. It includes forested riverine swamps dominated by *Nyssa aquatica*, with or without *Taxodium distichum* as a codominant. Other canopy and subcanopy species include *Nyssa biflora*, *Quercus lyrata*, *Carya aquatica*, *Fraxinus profunda*, *Fraxinus caroliniana*, *Planera aquatica*, and *Populus heterophylla*. Shrubs and herbs are limited to tree bases, fallen logs, and other elevated places in the stand. *Itea virginica* is often the only shrub present. Herbaceous species may be absent, and often are sparse. Species present can include *Phanopyrum gymnocarpon*, *Pluchea camphorata*, *Boehmeria cylindrica*, *Rudbeckia laciniata*, *Sagittaria latifolia*, *Onoclea sensibilis*,

Triadenum walteri, *Carex joorii*, *Carex glaucescens*, *Asclepias perennis*, *Saururus cernuus*, *Justicia ovata*, *Leersia lenticularis*, and others.

Environmental Summary: Associations in this alliance occur in backwater sloughs, low, wet flats, swales and backswamps, along blackwater streams, and in artificial lakes and millponds and other situations with altered or enhanced hydrology. Surface water is present well into the growing season in the forests of this alliance.

Association: CEG007431 *Taxodium distichum* - *Nyssa aquatica* / *Fraxinus caroliniana* Forest

Summary: This is a semipermanently flooded community of brownwater rivers which occurs primarily in the outer Atlantic Coastal Plain extending through the East Gulf Coastal Plain. Vegetation is characterized by a dense canopy composed almost exclusively of straight, tall individuals of *Taxodium distichum* and *Nyssa aquatica* with a sparse to moderate subcanopy and depauperate shrub and herb layers. Occasional individuals of several species (e.g., *Populus heterophylla*, *Salix nigra*, *Nyssa biflora*, *Planera aquatica*, *Ulmus americana*, *Fraxinus profunda*, *Fraxinus caroliniana*, *Carya aquatica*, *Quercus lyrata*) are possible in the canopy or subcanopy. The herbaceous layer is very sparse, and typical species include *Saururus cernuus*, *Proserpinaca pectinata*, *Proserpinaca palustris*, *Asclepias perennis*, *Commelina virginica*, *Leersia lenticularis*, and *Phanopyrum gymnocarpon* (= *Panicum gymnocarpon*). It is found on the lower Atlantic Coastal Plain from southeastern Virginia to southern Georgia, and possibly on the lower Gulf Coastal Plain west to southeastern Louisiana, excluding the Mississippi River Alluvial Plain. It can be found in oxbow lakes and ponds, along the banks of rivers and lakes, on low wet flats and sloughs, swales and backswamps. It occurs only on saturated or flooded soils. Forests dominated by *Taxodium distichum* and *Nyssa aquatica* are common throughout the southeastern Coastal Plain.

Vegetation Summary: Vegetation is characterized by a dense canopy composed almost exclusively of straight, tall individuals of *Taxodium distichum* and *Nyssa aquatica* (together contributing at least 75% of the canopy cover) with a sparse to moderate subcanopy and depauperate shrub and herb layers. Occasional individuals of several species (e.g., *Populus heterophylla*, *Salix nigra*, *Nyssa biflora*, *Planera aquatica*, *Ulmus americana*, *Fraxinus profunda*, *Fraxinus caroliniana*, *Carya aquatica*, *Quercus lyrata*) are possible in the canopy or subcanopy. The herbaceous layer is very sparse, and typical species include *Saururus cernuus*, *Proserpinaca pectinata*, *Proserpinaca palustris*, *Asclepias perennis*, *Commelina virginica*, *Leersia lenticularis*, and *Phanopyrum gymnocarpon* (*Panicum gymnocarpon*). *Decumaria barbara*, *Toxicodendron radicans*, and *Bignonia capreolata* are commonly occurring vines but usually have <10% cover.

Environmental Summary: The community occurs on a variety of inundated topographic habitats, including oxbow ponds and lakes, backwater sloughs, along river edges and in various isolated depressions within the floodplain. It is more commonly associated with brownwater than blackwater rivers. Soil types on which it is found include very poorly drained phases of Entisols, Alfisols, Inceptisols, Ultisols, and Spodosols (Burns and Honkala 1990a). Hydrologic

regime is the most important environmental determinant of the distribution of this community. Sites experience frequent flooding to near permanent ponding, with floodwater that may be 3 m deep during rainy seasons and may remain for extended periods (Burns and Honkala 1990a). Probability of annual flooding is 100% with soils nearly permanently saturated (Wharton et al. 1982).

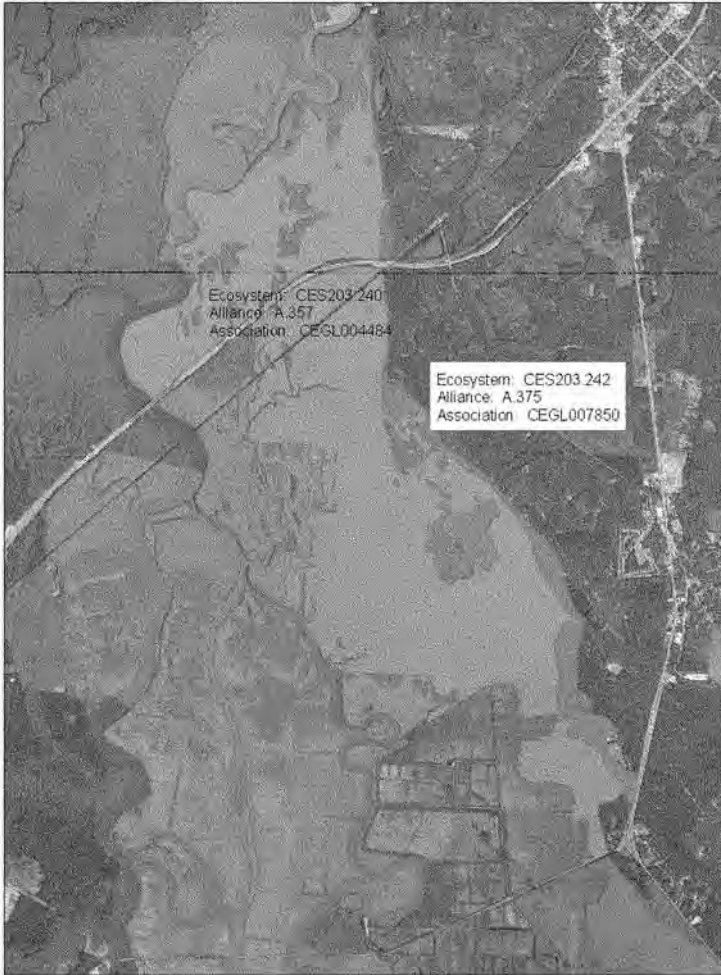


Figure 47

1.2 Ecosystem: CES 203.240 Southern Atlantic Coastal Plain Tidal Wooded Swamp

Summary: This system encompasses the tidally flooded areas in lower river floodplains and edges of estuaries of the Atlantic Coastal Plain from southeastern Virginia southward to northern Florida that have sufficiently fresh water and short enough flooding to be able to support tree canopies. *Taxodium*, *Nyssa*, or *Fraxinus* generally dominate. Swamps may be either regularly flooded by lunar tides or irregularly flooded by wind tides.

1.2A Alliance: A.357- *Nyssa biflora* - (*Nyssa aquatica*, *Taxodium distichum*) Tidal Forest Alliance

Summary: This alliance accommodates tidally flooded forests in lower, estuarine reaches of brownwater and blackwater rivers in the Outer Coastal Plain (tidewater) and also along estuarine shores. Flooding can be either lunar-tidal or wind-tidal and can be affected as well by riverine flooding events. The trees often have a stressed appearance, and the herbaceous layer usually is well-developed and more species-rich than in most non-tidal swamps, possibly as a result of the tidal nutrient input. Various combinations of *Nyssa biflora*, *Taxodium distichum*, and *Nyssa aquatica* usually dominate the canopy. One association is characterized by *Pinus taeda* along with *Nyssa biflora* and *Taxodium distichum* in the overstory. On blackwater rivers, *Nyssa aquatica* is often an indicator of a tidal condition, presumably because it requires the higher nutrients provided by tidal flooding. Other species common in tidal situations, such as *Morella cerifera* (= *Myrica cerifera*), *Lilaeopsis carolinensis*, *Peltandra virginica*, *Thelypteris palustris* var. *pubescens*, *Osmunda regalis* var. *spectabilis*, *Osmunda cinnamomea*, and *Rosa palustris*, are often common. Typical species of non-tidal swamps, such as *Quercus lyrata*, *Carya aquatica*, *Quercus phellos*, *Smilax laurifolia*, *Ilex glabra*, *Lyonia lucida*, *Woodwardia virginica*, *Sphagnum* spp., *Chamaecyparis thyoides*, *Cyrilla racemiflora*, and others, are absent.

Vegetation Summary: The canopy of stands of this alliance are usually dominated by various combinations of *Nyssa biflora*, *Taxodium distichum*, and *Nyssa aquatica*. On blackwater rivers, *Nyssa aquatica* is often an indicator of tidal condition, presumably because it requires the higher nutrients provided by tidal flooding. Other species common in tidal situations, such as *Morella cerifera* (= *Myrica cerifera*), *Lilaeopsis carolinensis*, *Peltandra virginica*, *Thelypteris palustris* var. *pubescens*, *Osmunda regalis* var. *spectabilis*, and *Rosa palustris*, are often common. Typical species of non-tidal swamps, such as *Quercus lyrata*, *Carya aquatica*, *Quercus phellos*, *Smilax laurifolia*, *Ilex glabra*, *Lyonia lucida*, *Woodwardia virginica*, *Sphagnum* spp., *Chamaecyparis thyoides*, *Cyrilla racemiflora*, and others, are absent.

Environmental Summary: These tidally flooded forests are found in lower, estuarine reaches of brownwater and blackwater rivers in the outer coastal plain (tidewater), and also along estuarine shores. Flooding can be either lunar-tidal or wind-tidal, and can be affected as well by riverine flooding events.

Dynamics: Flooding can be either lunar-tidal or wind-tidal, and can be affected as well by riverine flooding events.

Association: CEG004484 *Nyssa biflora* - (*Taxodium distichum*, *Nyssa aquatica*) / *Morella cerifera* - *Rosa palustris* Tidal Forest

Summary: This broadly defined association accommodates tidally flooded forests in lower, estuarine reaches of brownwater and blackwater rivers in the Outer Coastal Plain (tidewater), and also along estuarine shores. It may require subdivision as more information becomes available. Flooding of these environments can be either lunar-tidal or wind-tidal, and can be affected as well by riverine flooding events. The trees often have a stressed appearance, and the herbaceous layer usually is well-developed and more species-rich than in most non-tidal swamps, possibly as a result of the tidal nutrient input. Various combinations of *Nyssa biflora*, *Taxodium distichum*, and *Nyssa aquatica* usually dominate the canopy. In addition, *Liquidambar styraciflua* may be present. On blackwater rivers, *Nyssa aquatica* is often an indicator of tidal condition, presumably because it requires the higher nutrients provided by tidal flooding. Other species common in tidal situations, such as *Morella cerifera* (= *Myrica cerifera*), *Lilaeopsis carolinensis*, *Peltandra virginica*, *Thelypteris palustris* var. *pubescens*, *Osmunda regalis* var. *spectabilis*, and *Rosa palustris*, are often common. Typical species of non-tidal swamps, such as *Quercus lyrata*, *Carya aquatica*, *Quercus phellos*, *Smilax laurifolia*, *Ilex glabra*, *Lyonia lucida*, *Woodwardia virginica*, *Sphagnum* spp., *Chamaecyparis thyoides*, *Cyrilla racemiflora*, and others, are absent.

Vegetation Summary: The canopy of stands of this vegetation type are usually dominated by various combinations of *Nyssa biflora*, *Taxodium distichum*, and *Nyssa aquatica*. In addition, *Liquidambar styraciflua* may be present (Wharton 1978). On blackwater rivers, *Nyssa aquatica* is often an indicator of tidal condition, presumably because it requires the higher nutrients provided by tidal flooding. Wharton (1978) cites *Persea palustris*, *Forestiera acuminata*, *Sabal minor*, *Salix nigra*, *Cornus amomum*, *Planera aquatica*, *Alnus serrulata*, and *Fiburnum obovatum* as additional woody components. Other species common in tidal situations, such as *Morella cerifera* (*Myrica cerifera*), *Lilaeopsis carolinensis*, *Peltandra virginica*, *Thelypteris palustris* var. *pubescens*, *Osmunda regalis* var. *spectabilis*, and *Rosa palustris*, are often common (Schafale and Weakley 1990). Some additional low woody and herbaceous species cited by Wharton (1978) include *Aletris aurea*, *Decumaria barbara*, *Onoclea sensibilis*, *Arisaema dracontium*, *Justicia ovata*, *Clematis crispa*, *Ipomoea pandurata*, *Physostegia* sp., and *Leersia* sp. Typical species of non-tidal swamps, such as *Quercus lyrata*, *Carya aquatica*, *Quercus phellos*, *Smilax laurifolia*, *Ilex glabra*, *Lyonia lucida*, *Woodwardia virginica*, *Sphagnum* spp., *Chamaecyparis thyoides*, *Cyrilla racemiflora*, and others, are absent.

Environmental Summary: These tidally flooded forests are found in lower, estuarine reaches of brownwater and blackwater rivers in the Outer Coastal Plain (tidewater), and also along estuarine shores. Flooding can be either lunar-tidal or wind-tidal, and can be affected as well by riverine flooding events.

1.3 Ecosystem: CES203.242 Southern Atlantic Coastal Plain Mesic Hardwood Forest

Summary: This upland system of the Atlantic Coastal Plain ranges from Delaware south to interior Georgia in a variety of moist but non-wetland sites that are naturally sheltered from frequent fire. Such sites include lower slopes and bluffs along streams and rivers in dissected terrain, mesic flats between drier pine-dominated uplands and floodplains, and local topographic high areas within bottomland terraces or nonriverine wet flats. Soil textures are variable in both texture and pH. The vegetation consists of forests dominated by combinations of trees that include a significant component of mesophytic deciduous hardwood species, such as *Fagus grandifolia* or *Acer barbatum*. Its southern limit is generally exclusive of the natural range of *Pinus glabra* as mapped by Kossuth and Michael (1990) and *Magnolia grandiflora* as mapped by Outcalt (1990). Upland and bottomland oaks at the mid range of moisture tolerance are usually also present, particularly *Quercus alba*, but sometimes also *Quercus pagoda*, *Quercus falcata*, *Quercus michauxii*, *Quercus shumardii*, or *Quercus nigra*. *Pinus taeda* is sometimes present, but it is unclear if it is a natural component or has entered only as a result of past cutting. Analogous systems on the Gulf Coastal Plain have pine as a natural component, and this may be true for some examples of this system. Understories are usually well-developed. Shrub and herb layers may be sparse or moderately dense. Within its range, *Sabal minor* may be a prominent shrub. Species richness may be fairly high in basic sites but is fairly low otherwise.

Classification Comments: There remains some uncertainty how this system and other mesic hardwood systems should be divided. There is a broad gradient in climate and species composition from north to south and west. The boundaries at the northern edge of its range (the Chesapeake Bay Lowlands TNC ecoregion) and at the break between the South Atlantic Coastal Plain and East Gulf Coastal Plain ecoregions are boundaries of convenience to create breaks in this broad gradient. At the southern end, the boundary has been better determined (April 2006) to exclude areas within the combined ranges of *Pinus glabra* and *Magnolia grandiflora*, making this system deciduous rather than mixed evergreen-deciduous. Differences from mesic forests of the Piedmont are sometimes fairly subtle, and species that differentiate them in one part of the range may not work in other parts. In particular, some species that are excluded from the Coastal Plain farther south are common components farther north. In MD and DC, this system can extend into the Piedmont, straddling the fall zone where the Coastal Plain and Piedmont meet. Besides the variation across the range of this system, there are two sets of distinctions within it that may be worthy of consideration for defining separate systems. Acidic and basic substrates have substantial floristic differences. Variants on upland slopes, nonriverine swamp islands, and high ridges in bottomlands could be recognized as separate systems, or the latter two could be treated as part of the systems that surround them. However, the difference between ecological processes in uplands and wetlands separates those surrounded by wetland systems from the surrounding systems. This is especially true in the case of floodplains, which have flood-carried nutrient input as well as wetness as a difference. Floristic differences may exist between these variants, but they are subtle and do not appear to be definitive.

1.3A Alliance: A.375 Live Oak - Cherrybark Oak Forest Alliance

Summary: Wet-mesic forests of the Outer Coastal Plain of Louisiana, occurring on low ridges of the antecedent Mississippi River. Forests of related environments of South Carolina and possibly Georgia are included here as well. This alliance as presently defined is near the upland/wetland boundary; examples are constantly moist and sometimes have a high water table.

The canopy is dominated by *Quercus virginiana*, *Magnolia grandiflora*, and *Quercus pagoda*, with lesser amounts of *Liquidambar styraciflua* and *Quercus nigra*. The open understory consists of *Cornus florida*, *Ilex opaca* var. *opaca*, and *Ilex decidua*. Woody vines are abundant, especially *Parthenocissus quinquefolia*, *Toxicodendron radicans*, and *Campsis radicans*. The herb layer is well-developed and includes species such as *Asplenium platyneuron*, *Sanicula* sp., *Elephantopus carolinianus*, and *Thelypteris kunthii*.

Vegetation Summary: The canopy is dominated by *Quercus virginiana*, *Magnolia grandiflora*, and *Quercus pagoda*, with lesser amounts of *Liquidambar styraciflua* and *Quercus nigra*. The open understory consists of *Cornus florida*, *Ilex opaca* var. *opaca*, and *Ilex decidua*. Woody vines are abundant, especially *Parthenocissus quinquefolia*, *Toxicodendron radicans*, and *Campsis radicans*. The herb layer is well-developed and includes species such as *Asplenium platyneuron*, *Sanicula* sp., *Elephantopus carolinianus*, and *Thelypteris kunthii*.

Environmental Summary: Wet-mesic forests of the Outer Coastal Plain of Louisiana, occurring on low ridges of the antecedent Mississippi River. Forests of related environments of South Carolina and possibly Georgia are included here as well. This alliance as presently defined is near the upland/wetland boundary; examples are constantly moist and sometimes have a high water table.

Association: CEG007850 Live Oak - Cherrybark Oak - Southern Magnolia - Pignut Hickory / American Holly Forest

Summary: This forest occurs on mesic to dry-mesic bluffs in the outer Coastal Plain of southeastern South Carolina. The canopy is dominated by *Carya glabra*, *Quercus virginiana*, *Quercus pagoda*, and *Magnolia grandiflora*, with lesser amounts of *Quercus nigra* and *Liquidambar styraciflua*. The subcanopy is open and is dominated by *Ilex opaca*, with lesser amounts of *Pinus glabra*, *Cornus florida*, and *Carpinus caroliniana* ssp. *caroliniana*. The shrub layer is open, with *Ilex vomitoria*, *Vaccinium ellipticum*, *Arundinaria gigantea* ssp. *tecta*, *Morella cerifera* (*Myrica cerifera* var. *cerifera*), *Symplocos tinctoria*, *Callicarpa americana*, *Juniperus virginiana*, *Sabal minor*, *Berchemia scandens*, and *Toxicodendron radicans* ssp. *radicans*. Herbs are few, though *Chasmanthium laxum* and *Chasmanthium sessiliflorum* may be patchily common.

1.4 Specific Sites Proposed for Preservation

Figure 48 illustrates the specific tracts located within the Mill Creek and Abercorn Island areas that are proposed for preservation. Figure 48 also illustrates the location of the proposed preservation areas relative to the existing boundaries of the Savannah National Wildlife Refuge (SNWR). Figure 49 and Figure 50 illustrate the wetland area and wetland type as indicated by the National Wetland Inventory (NWI) for the Mill Creek area and Abercorn island area, respectively. Collectively, greater than 95% of the sites are composed of palustrine forested wetland or scrub shrub.

Tracts Evaluated for Preservation

Acreage in two areas could be preserved in perpetuity as mitigation for vegetative conversion of 337 acres of tidal wetlands.

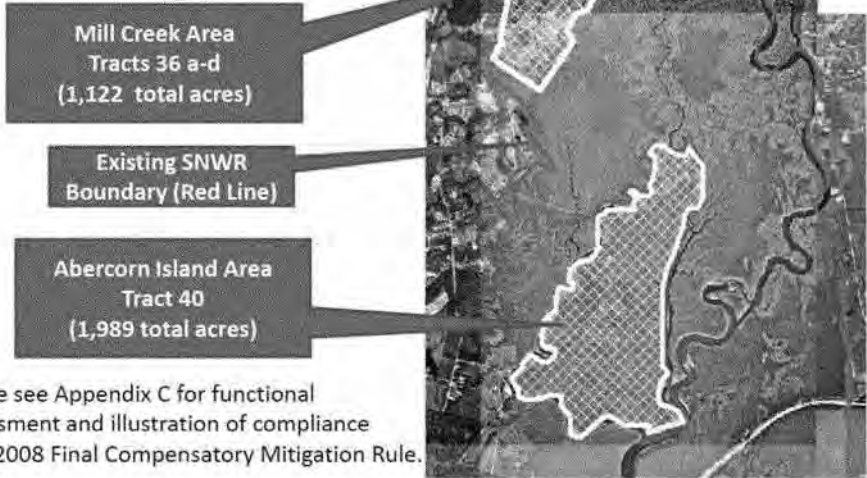


Figure 48

Mill Creek Area

877 acres of Wetland
135 acres of Upland

National Wetland
Inventory GIS Layer –

Wetland Classifications
For Mill Creek Area:

PFO1A

PSS1A

PFO1

Please see functional
assessment of wetland
preservation areas in
Appendix C for
detailed assessment of
wetland types/habitats.

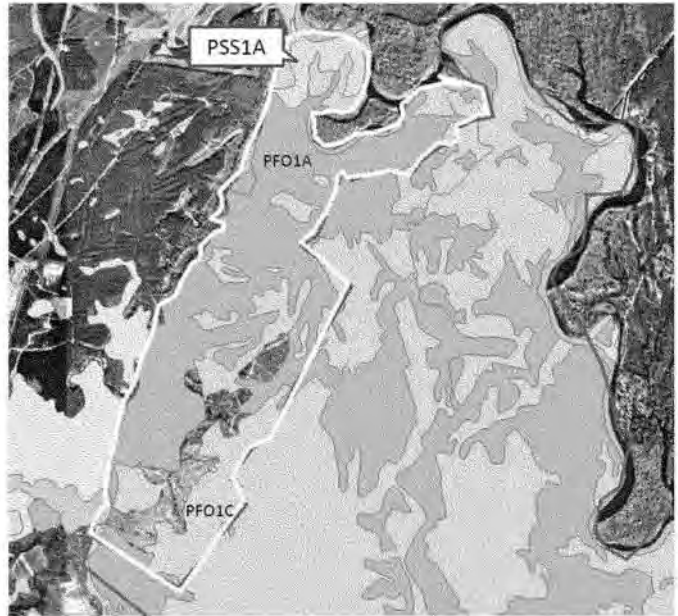


Figure 49

Abercorn Island Area

1,989 Acres of Wetland
0 acres of Upland

National Wetland
Inventory GIS Layer -

Wetland Classifications
For Abercorn Island Area:

PFO1A

PFO6F

PFO1C

Please see functional
assessment of wetland
preservation areas in
Appendix C for
detailed assessment of
wetland types/habitats



Figure 50

1.5 Descriptions for the NWI Codes presented in Figures 49 and 50

Description for code **PFO1A**:

P System PALUSTRINE: The Palustrine System includes all nontidal wetlands dominated by trees, shrubs, emergents, mosses or lichens, and all such wetlands that occur in tidal areas where salinity due to ocean derived salts is below 0.5 ppt. Wetlands lacking such vegetation are also included if they exhibit all of the following characteristics: (1) are less than 8 hectares (20 acres); (2) do not have an active wave-formed or bedrock shoreline feature; (3) have at low water a depth less than 2 meters (6.6 feet) in the deepest part of the basin; (4) have a salinity due to ocean-derived salts of less than 0.5 ppt.

Subsystem : **FO Class FORESTED:** Characterized by woody vegetation that is 6 m tall or taller.

1 Subclass Broad-Leaved Deciduous: Woody angiosperms (trees or shrubs) with relatively wide, flat leaves that are shed during the cold or dry season; e.g., black ash (*Fraxinus nigra*).

Modifier(s): **A WATER REGIME Temporary Flooded:** Surface water is present for brief periods during growing season, but the water table usually lies well below the soil surface for

most of the growing season. Plants that grow both in uplands and wetlands may be characteristic of this water regime.

Description for code **PFO1C**:

P System PALUSTRINE: The Palustrine System includes all non-tidal wetlands dominated by trees, shrubs, emergents, mosses or lichens, and all such wetlands that occur in tidal areas where salinity due to ocean derived salts is below 0.5 ppt. Wetlands lacking such vegetation are also included if they exhibit all of the following characteristics: (1) are less than 8 hectares (20 acres); (2) do not have an active wave-formed or bedrock shoreline feature; (3) have at low water a depth less than 2 meters (6.6 feet) in the deepest part of the basin; (4) have a salinity due to ocean-derived salts of less than 0.5 ppt.

Subsystem : **FO Class FORESTED**: Characterized by woody vegetation that is 6 m tall or taller.

1 Subclass Broad-Leaved Deciduous: Woody angiosperms (trees or shrubs) with relatively wide, flat leaves that are shed during the cold or dry season; e.g., black ash (*Fraxinus nigra*).

Modifier(s): **C WATER REGIME Seasonally Flooded**: Surface water is present for extended periods especially early in the growing season, but is absent by the end of the growing season in most years. The water table after flooding ceases is variable, extending from saturated to the surface to a water table well below the ground surface.

Description for code **PSS1A**:

P System PALUSTRINE: The Palustrine System includes all nontidal wetlands dominated by trees, shrubs, emergents, mosses or lichens, and all such wetlands that occur in tidal areas where salinity due to ocean derived salts is below 0.5 ppt. Wetlands lacking such vegetation are also included if they exhibit all of the following characteristics: (1) are less than 8 hectares (20 acres); (2) do not have an active wave-formed or bedrock shoreline feature; (3) have at low water a depth less than 2 meters (6.6 feet) in the deepest part of the basin; (4) have a salinity due to ocean-derived salts of less than 0.5 ppt.

Subsystem : **SS Class SCRUB-SHRUB**: Includes areas dominated by woody vegetation less than 6 m (20 feet) tall. The species include true shrubs, young trees (saplings), and trees or shrubs that are small or stunted because of environmental conditions.

1 Subclass Broad-Leaved Deciduous: Woody angiosperms (trees or shrubs) with relatively wide, flat leaves that are shed during the cold or dry season; e.g., black ash (*Fraxinus nigra*).

Modifier(s): **A WATER REGIME Temporary Flooded**: Surface water is present for brief periods during growing season, but the water table usually lies well below the soil surface for most of the growing season. Plants that grow both in uplands and wetlands may be characteristic of this water regime.

Description for code **PFO6F**:

P System PALUSTRINE: The Palustrine System includes all nontidal wetlands dominated by trees, shrubs, emergents, mosses or lichens, and all such wetlands that occur in tidal areas where salinity due to ocean derived salts is below 0.5 ppt. Wetlands lacking such vegetation are also included if they exhibit all of the following characteristics: (1) are less than 8 hectares (20 acres); (2) do not have an active wave-formed or bedrock shoreline feature; (3) have at low water a depth less than 2 meters (6.6 feet) in the deepest part of the basin; (4) have a salinity due to ocean-derived salts of less than 0.5 ppt.

Subsystem : **FO Class FORESTED**: Characterized by woody vegetation that is 6 m tall or taller.

6 Subclass Deciduous: A plant community where deciduous trees or shrubs represent more than 50% of the areal coverage of trees and shrubs. The canopy is normally leafless some time during the year.

Modifier(s): **F WATER REGIME Semi-permanently Flooded:** Surface water persists throughout the growing season in most years. When surface water is absent, the water table is usually at or very near the land's surface.

Presently, the wetland systems located on these properties exhibit all traditional wetland functions. The upland areas also exhibit relatively undisturbed maritime forest-type ecosystems. In the past 10 years, areas in the vicinity of the SNWR have experienced substantial changes in land use. The USACE and other entities anticipate that the Savannah Harbor, and areas surrounding the SNWR, will continue to experience population growth, industrial/commercial development, and changes in land use. In addition to the industrial developments that have been permitted by the USACE in recent years, the US Geological Survey, Water Science Center (GaWSC) commented on the large number of industrial facilities and associated impacts that are anticipated on lands in close proximity to the Georgia Ports Authority and the SNWR. There are also threats that subtle changes in adjacent land use will also have a detrimental impact on the SNWR. By way of example, a Public Notice published by the Charleston District, Corps of Engineers on September 28, 2009, requests comment on a proposal from a private landowner to divert tidal water flow onto an approximately 693-acre property to increase the hydrology on 485 acres of previously-existing rice impoundment. The 693-acre property, which would be used as a mitigation bank, presently provides benefits to migratory waterfowl during migratory stops similar to those provided by Refuge lands. Conversion of such acreage to saltmarsh could shorten their stay in the area and result in the birds that the Refuge serves resuming their migration with less rest. The expected effects of the proposed regulatory action on the SNWR have not been quantified at this time, but the proposed project is an example of the continued threat that manipulation of adjacent lands pose to the SNWR and the resources it protects.

2.0 Assessment of Restored Marsh Area used to Mitigate for Direct Impacts

Disposal Area (DA) 1S is approximately 45 acres in size and is located north of the Federal Navigation Channel. It is located in close proximity to the Middle River location and directly east of the Atlantic Wood Industries facility within Savannah Harbor. DA 1S was used for the unconfined deposition of dredged sediments for many years. Savannah District stopped using it. Historical records indicate that the composition of the dredged material consisted of approximately 67% sand (#230 sieve), 14% silt, and 9% clay material. Presently, DA 1S supports both tree and shrub vegetation, with some marsh fringe areas dominated by *Spartina alterniflora* at the lower elevations. In addition, an existing 1.7 acre restoration site is also located in an area of the DA that was graded to provide mitigation for a previous GPA project.

The 42 acres of contiguous, restored brackish marsh, which includes development of tidal creeks, will have more ecological value than 47% of marsh proposed for impact (i.e., 7.3 acres of marsh proposed for impact is degraded, poorly functioning brackish marsh along the navigation channel). As previously mentioned, the proposed mitigation site is north of the Federal Navigation Channel that would be a component of all depth alternatives. Thus, the large, non-segmented size of the mitigation area, coupled with its "in basin" location and incorporation of a

strip of trees to separate the restoration site from the harbor, makes it an ideal “in kind / in basin” mitigation option for replacing the brackish marsh acreage that would be impacted.

D. Use of Watershed Assessment to Identify Appropriate Wetland Mitigation

33 CFR 332.2 (b) of the Final Mitigation Rule provides information on the approach to identifying Type and location of compensatory mitigation. The rule states, “ (1) *When considering options for successfully providing the required compensatory mitigation, the district engineer shall consider the type and location options in the order presented in paragraphs(b)(2) through (b)(6) of this section. In general, the required compensatory mitigation should be located within the same watershed as the impact site, and should be located where it is most likely to successfully replace lost functions and services, taking into account such watershed scale features as aquatic habitat diversity, habitat connectivity, relationships to hydrologic sources (including the availability of water rights), trends in land use, ecological benefits, and compatibility with adjacent land uses. When compensating for impacts to marine resources, the location of the compensatory mitigation site should be chosen to replace lost functions and services within the same marine ecological system (e.g., reef complex, littoral drift cell). Compensation for impacts to aquatic resources in coastal watersheds (watersheds that include a tidal waterbody) should also be located in a coastal watershed where practicable.*”

The USACE used this approach as it developed mitigation for both direct and indirect impacts to wetlands. The following sections provide details that illustrate how the Corps’ wetland mitigation complies with the 2008 Final Mitigation Rule.

1.0 Identification and Justification of Wetland Mitigation for Indirect Impacts

As defined in the Functional Assessment section of this analysis, deepening the harbor to a 48-foot depth would result in a conversion of the dominant vegetative species typically observed in approximately 337 acres of freshwater marsh (freshwater to brackish marsh scenario). Of the functions associated these emergent wetland systems, the one that would experience a minor impact as a result of the conversion would be fish and wildlife habitat value. Therefore, it was important to the Corps that the mitigation selected offset impacts to this wetland function.

1.1 Evaluation of Mitigation Banks Credits

The District evaluated the Regional Internet Banking Information and Tracking System (RIBITS) for potential mitigation banks that possess tidal freshwater credits within the Lower Savannah River Watershed. As of March 2011, the following banks have primary service areas that overlap the harbor area, and these banks are not sold out of credits: Bath Branch, Brushy Creek, Margin Bay, Millhaven, Old Thorn Pond, and Phinazy Swamp. These banks do not contain tidal, freshwater systems and/or the associated credits. A review of secondary service areas overlapping the project area resulted in the following list of banks that exist and are not sold out of credits: Black Creek and Wilhelmina Morgan. Likewise, these banks do not contain tidal, freshwater systems and/or the associated credits. Thus, at this time mitigation banks with “in kind” mitigation do not exist within the Lower Savannah Watershed.

1.2 Evaluation of In Lieu Fee Program Credits

As of March 2011, the In-Lieu Fee Program in the State of Georgia has not been updated or approved by the USACE and Regulatory Interagency Review Team (IRT) to provide compensatory mitigation credits that would offset impacts to aquatic resources. At this time, the USACE, Regulatory Division is working with interested parties and the Georgia Land Trust Service Center to update the program.

1.3 Evaluation of Permittee-Responsible Mitigation under a Watershed Approach

Per guidance provided at 33 CFR 332.3(c)(1), the Final Compensatory Mitigation Rule includes the following: *"Where a watershed plan is available, the district engineer will determine whether the plan is appropriate for use in the watershed approach for compensatory mitigation."*

The Georgia Department of Natural Resources Environmental Protection Division (GA DNR-EPD) developed the Savannah River Basin Management Plan 2001, *"to provide relevant information on the Savannah River basin characteristics, describe the status of water quality and quantity in the Savannah River basin, identify present and future water resource demands, present and facilitate the implementation of water protection efforts, and enhance stakeholder understanding and involvement in basin planning."* With respect to the Savannah River Basin Management Plan 2001, USACE reviewed the document in order to determine if priorities listed in the plan were compatible with the development of a mitigation plan specific to the indirect impacts associated with the conversion of freshwater marsh to brackish marsh. Although the plan focused on measures for improving water quality and reducing water consumption, the long-term priorities for the Lower Savannah River Basin were considered and are indicated below:

- Protecting water quality in lakes, rivers, streams, estuaries and coastal waters through attainment of water quality standards and support for designated uses;*
- Providing adequate, high quality water supply for municipal, agricultural, industrial, and other human activities;*
- Preserving habitat suitable for the support of healthy aquatic and riparian ecosystems;*
- Protecting human health and welfare through prevention of water-borne disease; minimization of risk from contaminated fish tissue, and reduction of risks from flooding; and*
- Ensuring opportunities for economic growth, development, and recreation in the region."*

Of the priorities listed in the Savannah River Basin Management Plan, “*preserving habitat suitable for the support of healthy aquatic and riparian ecosystems*” is a priority within the plan that is consistent with the preservation of 2,683 acres of wetland and upland buffer adjacent to the SNWR.

The Mitigation Rule also provides guidance when no formal watershed plan is available. In situations where watershed plans do not exist, 33CFR 332.3(c) (1) also states, “*Where no such plan is available, the watershed approach should be based on information provided by the project sponsor or available from other sources.*”

The following facts are presented in support of the proceeding statement. The Corps assembled and used a Wetland Interagency Coordination Team (ICT) consisting of technical expert representatives from USACE, Federal natural resource agencies, and State natural resource agencies representatives to identify acceptable mitigation for the proposed project. At that time, USFWS stated that mitigation actions must be performed within the basin for impacts to wetlands residing within the SNWR. The Service recommended preservation of lands as a possible solution and recommended sites that are part of their long term lands acquisition strategy to compliment the SNWR. The Corps also consulted with the Stakeholder Evaluation Group, including its Non-Governmental Organizations (NGOs) members, to identify any other suitable mitigation alternatives. Over the 10-year study period, no agency or organization could identify another feasible alternative as mitigation for impacts that would occur as a result of wetland conversion. Therefore, the USACE proceeded with the identification of preservation sites.

In summer 2003, the Corps assembled a Wetland Interagency Coordination Team (ICT) to assist in its analysis of potential wetland impacts from the SHEP. The team consisted of agency wetland experts from USEPA, USFWS, NMFS, GA DNR, SC DNR, and SC DHEC. The agencies identified an acceptable technical approach to determine wetland impacts. They also identified the information needs they would have when they reviewed the DEIS. Since creation of the team, the USACE hosted 7 meetings of the ICT. During those meetings, methods for evaluating functional losses and mitigation alternatives for wetland impacts were proposed and discussed at length. After every meeting, the Corps prepared a Memorandum For Record (MFR), which was provided to all members of the ICT, including EPA. Of the seven meetings that were hosted by the USACE, five were attended by a representative of EPA.

The Corps also conducted an Agency Technical Review (ATR) to assess the use of Savannah District's Regulatory Standard Operating Procedures (SOP) as a tool in the development of a mitigation plan for SHEP. The ATR was lead by the National Deep-Draft Navigation Planning Center of Expertise and was performed by Corps experts in the Engineering Research and Development Center in Vicksburg, MS. The ATR was to determine if the SOP was an appropriate method to determine the preservation acreage needed to compensate for impacts resulting from the SHEP. The ATR was also conducted to comment on the reasonableness of the assumptions and calculations that Savannah District used in applying the SOP for the SHEP. The SOP was used only to determine the amount of preservation acreage necessary to offset the remaining acreage impacted after development of avoidance, minimization, and restoration features. The ATR concurred with use of the SOP to determine the amount of preservation

acreage needed and considered Savannah District's application of the SOP to be reasonable in quantifying impacts and the associated mitigation that would be required.

The USFWS provided a Fish and Wildlife Coordination Act Report, dated August 2010. In that report, the USFWS concurred with use of the SOP, which calculated a need to preserve 2,683 acres of land adjacent to the SNWR for the 48-foot alternative. The Service provided updates to the SOP calculations in Appendix A of the report. The USACE concurred with use of the updated SOP worksheets and adopted the results of those calculations for use in the DEIS. The USFWS provided a Final Fish and Wildlife Coordination Act Report in March 2011. That report reiterated the approval of the USFWS, SC DNR and GA DNR in the use of the SOP and its specific application to the proposed harbor deepening alternatives.

When evaluating possible mitigation options, the USACE also reflected on the guidance identified as *Considerations*, which is defined at 33 CFR 332.2(c)(2) i-v of the Final Mitigation Rule. With respect to the Lower Savannah River Watershed, the following facts were considered with respect to regulations i-v when developing a mitigation plan:

- Deepening the harbor to a 48-foot depth would result in a conversion of the dominant vegetative species typically observed in approximately 337 acres of freshwater marsh (freshwater to brackish marsh scenario). It is important to note that many of the emergent plant species associated with freshwater marsh systems would still be readily observed in environments that have been defined as brackish marsh (Latham et. al., 1994). Please see Functional Assessment. As illustrated in Table 1, the only indirect effect the 48-foot project would have on the function of these wetlands systems would be associated with fish and wildlife habitat. When considering SHEP impacts, all other elements of wetland function associated with predicted shifts in wetlands classification would be negligible as a result of the anticipated increase in salinity. With respect to fish and wildlife habitat, many of the same species utilize both brackish marsh and saltmarsh habitats.
- The FEIS describes the rationale behind selection of the EFDC model in Section 5.1.2.1 of the FEIS (Pages 5-8 through 5-13). In brief, a comparison of models illustrated that wetland impacts identified by using the EFDC hydrodynamic model are higher (i.e., greater quantity) than those identified by the Marsh Succession Model at all proposed project depths. This indicates that the Corps' use of the EFDC-derived impacts is a more inclusive and conservative estimate. That is, the EFDC model is more likely to capture all impacts than other models presently available.
- Figure 51 from Odum (1988) illustrates the various salinity ranges that occur within a tidal, estuarine system. The EFDC model thresholds for identifying tidal freshwater marsh (0.0 – 0.5 ppt), brackish marsh (>0.5 – 4.0 ppt), and saltmarsh (> 4.0 ppt) have been imposed in red on the right-hand side of the figure. Of interest, Odum's (1988) review article compares tidal freshwater systems (less than 0.5 ppt) to salt marsh systems (annual average between 18.0 to 35.0 ppt) (Figure 52).

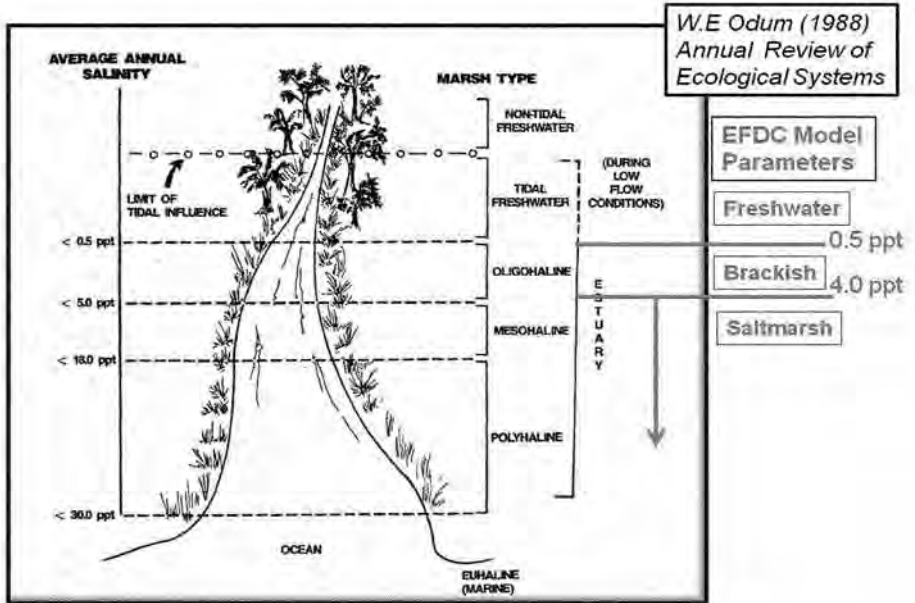


Figure 51. Tidal Estuarine System with EFDC Model Parameters

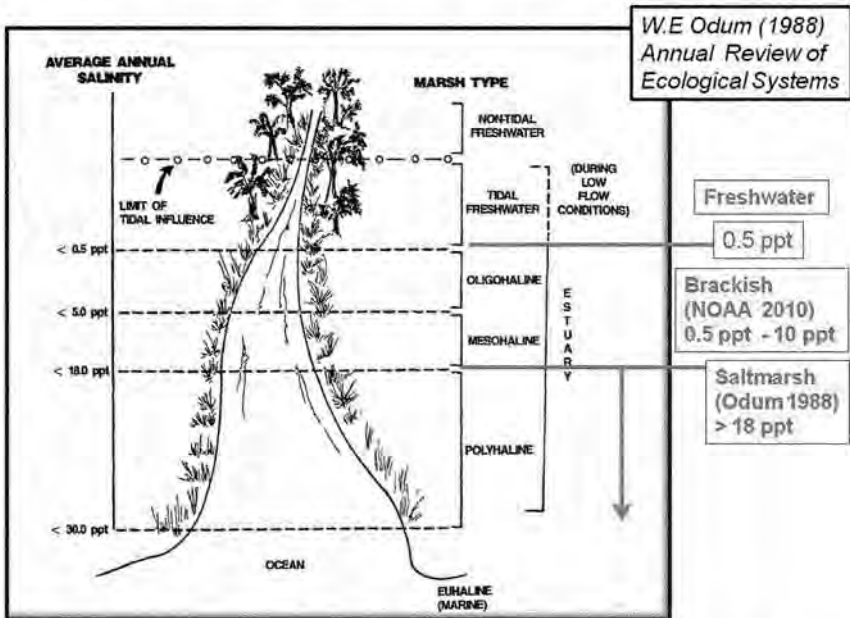


Figure 52. Tidal Estuarine System and salinities reported from references

Additionally, NOAA (2010) reports brackish marsh salinities in the range of 0.5 – 10.0 ppt with saltmarsh vegetative species being more pronounced at > 10.0 ppt (Figure X). The EFDC value for saltmarsh (> 4.0 ppt) is approximately 4.5 times less than what is reported by Odum (1988) and 2.5 times less than that reported by NOAA (2010). Additionally, the NOAA (2010) range for brackish marsh includes areas determined by the EFDC model to be saltmarsh. When considering values reported in the literature, the acreage of saltmarsh conversion (i.e., 730 acres), which was calculated using the EFDC model, is a very inclusive value **and includes** existing vegetative areas that would not transition (post deepening) to brackish marsh following deepening *because* these areas currently exist within the salinity range of a brackish marsh (0.5 -10 ppt).

- The following figures illustrate the pre-project and post-project surface water salinities as determined by the EFDC model within the Savannah River Estuary under average annual, normal flow conditions (Figure 53).

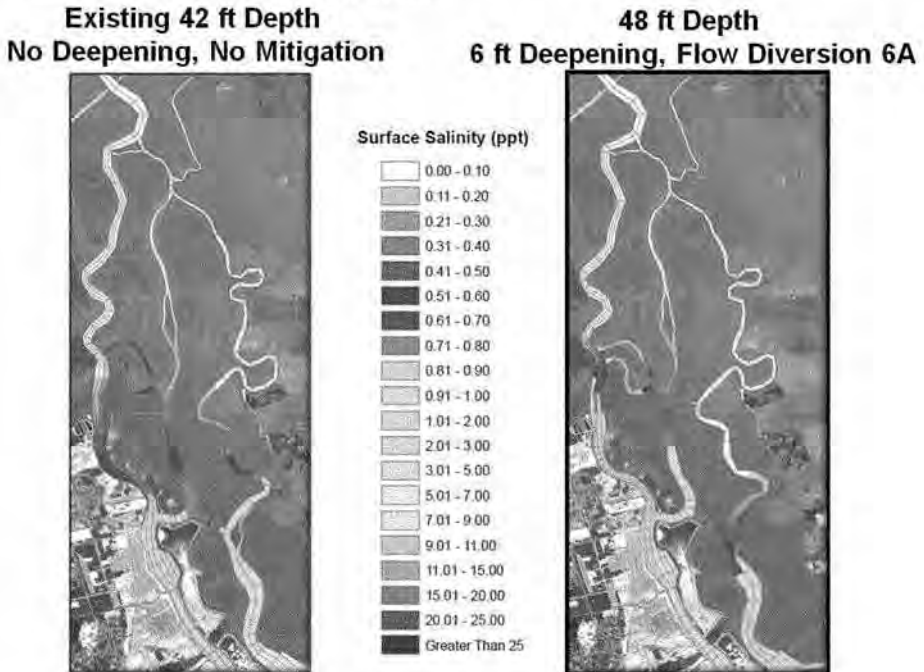


Figure 53

In brief, the areas of the harbor presented in the above figures illustrate the vicinity of the Savannah River Estuary where 337 acres of tidal freshwater marsh and 730 acres of saltmarsh would be converted to 1067 acres of brackish marsh (as quantified with use of

EFDC model). Salinity ranges are presented in the color-coded legend, and illustrated variations in range are reported in increments of 0.1 from 0.00 – 1.00 ppt. A 1.0 variation in range is illustrated from 1.01 – 3.00 ppt, and a 2.0 variation in range is illustrated from 3.01 – 11.00 ppt. When considering the figures above, it is important to note generally all of the areas coincide with the tidal freshwater salinity range (0.0-0.5 ppt) or the brackish marsh salinity range (0.5-10ppt) reported in the references (NOAA, 2010; Odum, 1988). *Thus, no impacts to saltmarsh would be quantified if salinity ranges presented in the literature where adopted by the USACE.* However, the USACE chose to be conservative in the estimate of the brackish marsh range (0.5 ppt – 4.0 ppt), which results in a classification of saltmarsh for some areas.

Figure 54 illustrates the differential in salinity that occurs within each model cell when considering the pre- and post-project conditions. Resulting salinity differentials are

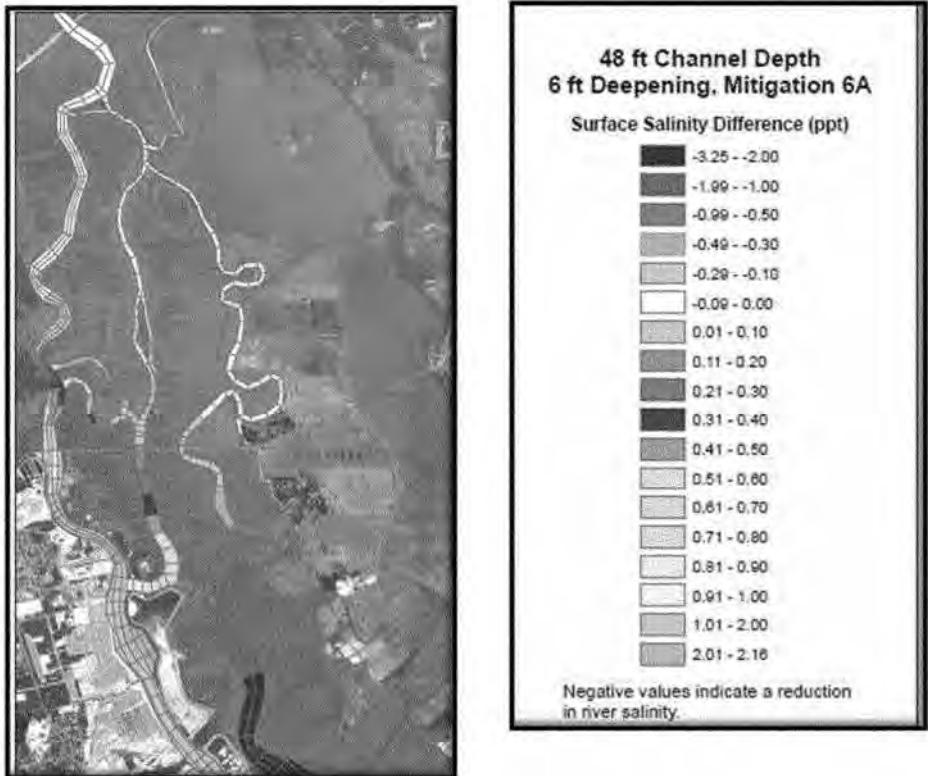


Figure 54

presented in the color-coded legend. It is important to note that the changes in pre- and post project salinities are very small with changes of < 0.5 ppt for the most sensitive areas of the Savannah River Estuary. Little, if any, shifts in vegetation would be expected to

occur with these areas of subtle salinity changes. Areas that would experience changes of approximately $\pm 2.0 - 3.0$ ppt are located in areas where pre-project EFDC-reported salinities are between 3.0-5.0 ppt (oligohaline) and 5.0 - 7.0 ppt (mesohaline) (Figure 53). *In these areas, the post-project resulting salinities would still be consistent with oligohaline and mesohaline environments traditionally observed in estuarine environments (Figure 53).* Thus, vegetation typically observed in these environments would still be present, and shifts in vegetation (if any) in these areas would be minimal.

- River flows used in simulations to determine wetland impacts for the "Basic Evaluation" are average/typical flows for the evaluation period of 1 March to 1 November as specified by the Interagency Coordination Team. Average/typical river flows were determined using recorded gage data for Savannah River at Clyo, Georgia. The EFDC model has continuous input boundary conditions for a 7 year period (1997-2003) available for simulation. The year 1997 was found to have flow conditions representative for the long term average flows for the river. Low or drought river flows were also considered for determining wetland impacts. This flow condition was called "Sensitivity Analysis #1". Low or drought river flows were determined using recorded gage data and 2001 was found to have flow conditions representative for the long term low/drought flows for the river. *As illustrated in the results for drought flow conditions, deepening (48-foot depth) in conjunction with flow diversion plan 6A actually converts 362 acres of brackish marsh to freshwater wetlands.* However, the USACE chose to be more inclusive of impacts and used the results of average/typical river flows that results in 337 acres of freshwater wetland conversion (please see following table).

Freshwater Tidal Marsh/Wetland Impacted Acreages Deepening WITH Flow Diversion Plan 6A					
Model Scenario	44 ft depth	45 ft depth	46 ft depth	47 ft depth	48 ft depth
Basic Evaluation Average/Typical Flow Conditions	322	-32	-201	-223	-337
Sensitivity Analysis #1 Low/Drought Flow Conditions	920	903	678	520*	362

Acreages shown in red are freshwater tidal wetlands that are not mitigated for by flow altering plans (6a & 6b).

**Interpolated value.*

- The US Fish and Wildlife Service reports that more than 12,000 acres of tidal freshwater marsh existed in the Lower Savannah River Basin in the early 1800s.

Colonization, rice cultivation, harbor deepening projects, and other land manipulations have reduced those numbers over the last 200+ years (See Appendix L-Cumulative Impact Analysis, Section 8-Wetlands, for detailed description of Lower Savannah River Basin wetland composition over time).

- Several studies were conducted during the SHEP to establish baseline conditions in regards to the amount of tidal freshwater marsh remaining in the estuary. Both Applied Technology and Management (March 2003) and USFWS (Welch and Kitchens 2006) conducted studies to classify the various wetland communities in the study area (I-95 Bridge to mouth of Back River). Using a marsh succession model, the USFWS identified the following marsh distribution (Welch and Kitchens 2006):

Marsh Distribution

Marsh Type	Acreage
Freshwater	3,269
Brackish	3,082
Saltmarsh	2,506

- The Savannah Harbor is a very dynamic environment that is subject to continuous manmade and natural perturbations/disturbances. As a result, there are no opportunities in the Lower Savannah River Watershed to provide some form of sustainable, *in situ* tidal freshwater wetland mitigation.
- Wetland creation, which would be derived from upland areas, has a very high risk of failure. For the duration of the project, a created freshwater system would require continuous maintenance. The USFWS determined construction of freshwater habitat in upland would be extremely risky, not self-sustained, and therefore, not a practicable alternative. Ultimately, the USACE and other Wetland Interagency Coordination Team member concluded that the creation of freshwater, tidal wetlands was not a viable option.
- Without the Flow Diversion Structures included in the SHEP project, approximately 1,212 acres of freshwater marsh would be converted to brackish marsh. By implementing flow-altering measure 6A, there would be 337 acres of freshwater conversion to brackish marsh. Thus, the flow altering measure 6A satisfies both avoidance and minimization elements by maintaining 875 acres of freshwater marsh that would otherwise experience some degree of vegetative conversion. In 10 years, the USACE and other members of the Wetland Interagency Coordination Team could not identify any other opportunities to provide restoration and/or enhancement of tidal freshwater marsh. Therefore, the acquisition and preservation of lands (i.e., wetlands and non-wetland riparian corridors) adjacent to the SNWR was identified and

subsequently prioritized as a large-scale method for maintaining the ecological functions of the Lower Savannah River Watershed.

- The Savannah River National Wildlife Refuge (SNWR) is a conservation area of national importance with habitats that are important to many unique plant and animal species, including threatened and endangered species. It is also located in the vicinity of the SHEP project (i.e., "In Basin" mitigation).
- Presently, wetland and non-wetland riparian areas adjacent to the SNWR are being converted to commercial/industrial land uses with increased impervious surface coverage. Development adjacent to the boundaries of the SNWR has the potential to directly and indirectly impact fish/wildlife habitat function; decrease water quality in the vicinity of the wildlife refuge; and increase risk of wildfire probability. All of these impacts are associated with development and human encroachment.
- Preservation of wetlands and upland buffers adjacent to the existing SNWR is a sustainable approach to mitigation that results in the expansion of the refuge property; protection of wetlands and upland buffers; the expansion/protection of wildlife corridors; reduction in likelihood of future indirect impacts associated with stormwater runoff and septic systems; and decrease risk of wildfire probability that comes with development and human encroachment.
- Georgia Department of Natural Resources Environmental Protection Division developed the Savannah River Basin Management Plan 2001 that identified "*Preserving habitat suitable for the support of healthy aquatic and riparian ecosystems*" as a long term priority for the Lower Savannah River Watershed.
- The latest version of the Refuge's Acquisition Plan is dated July 2007 and is included in the document titled "Final Environmental Assessment and Land Protection Plan; Proposed Expansion of Savannah National Wildlife Refuge". As defined in the plan, "*the proposed acquisition would protect a biologically diverse complex of wetlands with high ecological values for numerous plants and animals.*" and "*project lands acquired as part of the refuge would be managed in a manner that would protect and enhance the fish and wildlife habitat values they provide.*" By acquiring lands adjacent to the SNWR, and thereby expanding the refuge, a primary initiative of the National Wildlife Refuge System Improvement Act of 1997 is also satisfied. It also satisfies major objectives of Georgia and South Carolina's Comprehensive Wildlife Conservation Strategies.
- Estuarine generalist fish species are found in all Savannah River Estuary (SRE) habitats (i.e., tidal freshwater marsh <1ppt; oligohaline (1-5 ppt); mesohaline (5-15 ppt); and polyhaline (> 15ppt)), and variability in distribution is attributed to seasonal trends. As illustrated in the following table, spatial patterns in fish distribution are not discernable particularly in the <1 ppt to 15 ppt salinity range.

Totals for All Species


Polyhaline (>15 ppt)				Mesohaline (5-15 ppt)				Oligohaline (1-5 ppt)				Tidal Freshwater (<1 ppt)			
F	W	Sp	Su	F	W	Sp	Su	F	W	Sp	Su	F	W	Sp	Su
141	324	724	3731	1297	1165	9582	14147	2953	4616	5448	6264	1627	3401	7967	4071
TOTAL: 4,920				TOTAL: 26,191				TOTAL: 19,281				TOTAL: 17,066			

Estuarine generalist fish species including: Bay anchovy, Atlantic menhaden, Atlantic croaker, spot, other drum species, gobies, blueback herring, Southern flounder, and striped mullet dominated the fish densities in habitats and comprised over 90 % of the total number of fishes collected. Generally, most of the 91 fish species sampled from the SRE could be considered estuarine generalists that were present in most habitat types during most seasons. Jennings and Weyers (2003) report this finding was not surprising because the variability in salinity distribution in the SRE created a mosaic habitat pattern influenced by tidal fluctuation and river discharge. Many areas of the SRE had different salinity-based habitats in a 6-hour tidal period and from year 1 to year 2 when river discharge was different. The most abundant species seemed capable of using all of the habitats found in the SRE. Statistical comparisons of mean fish density and mean species richness gave variable results. Most variation in fish distributions was attributed to seasonal trends. Density and richness were lowest in fall when many species disappeared from sample reaches and abundances of other species decreased across the estuary (Jennings and Weyers, 2003).

Jennings and Weyers (2002) also normalized the number of fish found in tidal creeks by the volume of water in which the fish were retrieved (Figure 55). This work was completed in tidal creeks for each of the estuarine environments that have been previously discussed. In brief, the authors found no statistical difference in the density of fish or species richness when comparing all four estuarine environments (Tidal Fresh, Oligohaline, Mesohaline, and Polyhaline).

Fish Density and Species Richness in Tidal Creeks

Jennings and Weyers (Feb 2002) Annual Report
Temporal and Spatial Distribution of Estuarine-Dependant Species

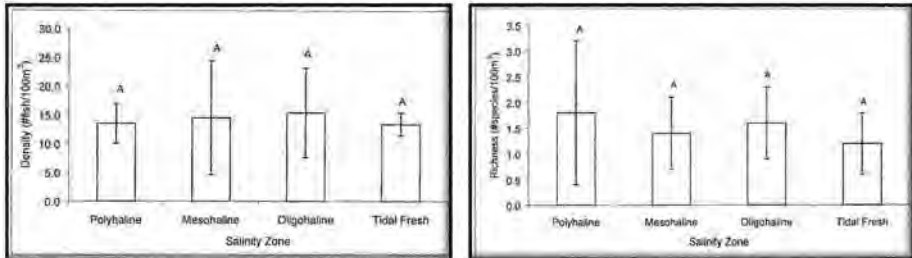

Tidal Freshwater (0-1 ppt); Oligohaline (1-5 ppt); Mesohaline (5-15 ppt); Polyhaline (> 15 ppt)


Figure 5. Mean fish density ($\pm$ st. dev.) and species richness ($\pm$ st. dev.) for ichthyoplankton surveys conducted in the four salinity zones from September 2000 to August 2001. Different letters denote means that were significantly different.

Figure 55

Jennings and Weyers (2002) also normalized the number of fish found along the marsh edge by the volume of water in which the fish were retrieved (Figure 56). This work was completed along the marsh edge for each of the estuarine environments that have been previously discussed. In brief, the authors found a statistical difference in fish density when comparing tidal fresh water marsh to oligohaline and mesohaline marsh systems. However, no statistical difference in species richness was observed when comparing all three of the estuarine environments that have been identified within the three marsh areas (i.e., tidal fresh, oligohaline, and mesohaline).

Fish Density and Species Richness Along Marsh Edge

Jennings and Weyers (Feb 2002) Annual Report
Temporal and Spatial Distribution of Estuarine-Dependant Species

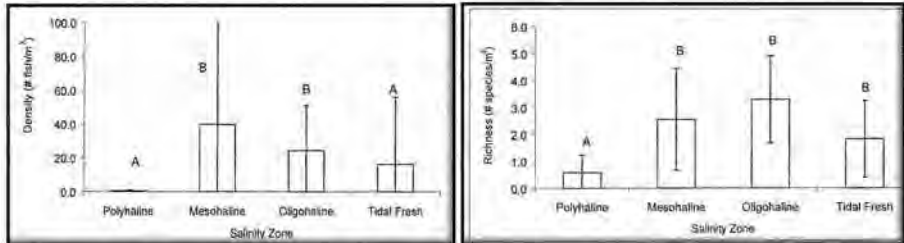

Tidal Freshwater (0-1 ppt); Oligohaline (1-5 ppt); Mesohaline (5-15 ppt); Polyhaline (> 15 ppt)

Figure 9. Mean fish density ($\pm$ st. dev.) and species richness ($\pm$ st. dev.) for marsh-edge drop surveys conducted in the four salinity zones from October 2000 to September 2001. Different letters denote means that were significantly different.


Figure 56

When evaluating possible mitigation options, the USACE also reflected on the guidance identified as *Information Needs*, which is defined at 33 CFR 332.3 (c)(3) i-iii of the Final Mitigation Rule. The following facts are presented in compliance with regulations i-iii that was previously cited.

- With respect to overall development trends in the Lower Savannah River Watershed, estimates of increases in population and associated impervious surface coverage are provided in Section A titled, "Watershed Characterization" of this Appendix. Within the watershed, Chatham and Effingham counties (lower end of watershed) are expected to experience the greatest percent increase in percent impervious surface coverage from 2010 to 2020, which is estimated at 4.9% (Figure 57).
- The USACE has evaluated development trends within 5 miles of the Savannah National Wildlife Refuge for the last 15 years. In those 15 years, the USACE has authorized approximately 170 Corps permit actions (Savannah and Charleston Districts) that resulted in more than 230 acres of wetland impacts. Figure 58 illustrates the number of actions and acreage of wetland impacts authorized during the past 15 years. The reduced number of actions associated with the 2006-2010 period reflects a decrease in economic growth across the Nation, with less associated development occurring during that time. This has also been reflected in the total number of regulatory actions processed throughout the state during this time period. However, those trends are expected to change in the future. It is also important to note that these

USACE-permitted actions do not account for other projects in the area that would result in land use changes but did not require a Corps permit. Figure 53 illustrates the rate at which the cumulative number of USACE permitted actions has occurred. Although the magnitude of wetland impact cannot be assumed with each future action, the trends illustrated in Figure 59 suggest that by 2015 the USACE will have potentially authorized 230 wetland impact actions (cumulative since 1995) within 5 miles of the SNWR. Figure 60 illustrates the type of USACE-permitted activity that has occurred within 5 miles of SNWR as a percentage of the total actions.

Lower Savannah River Watershed (8-Digit HUC 03060109)

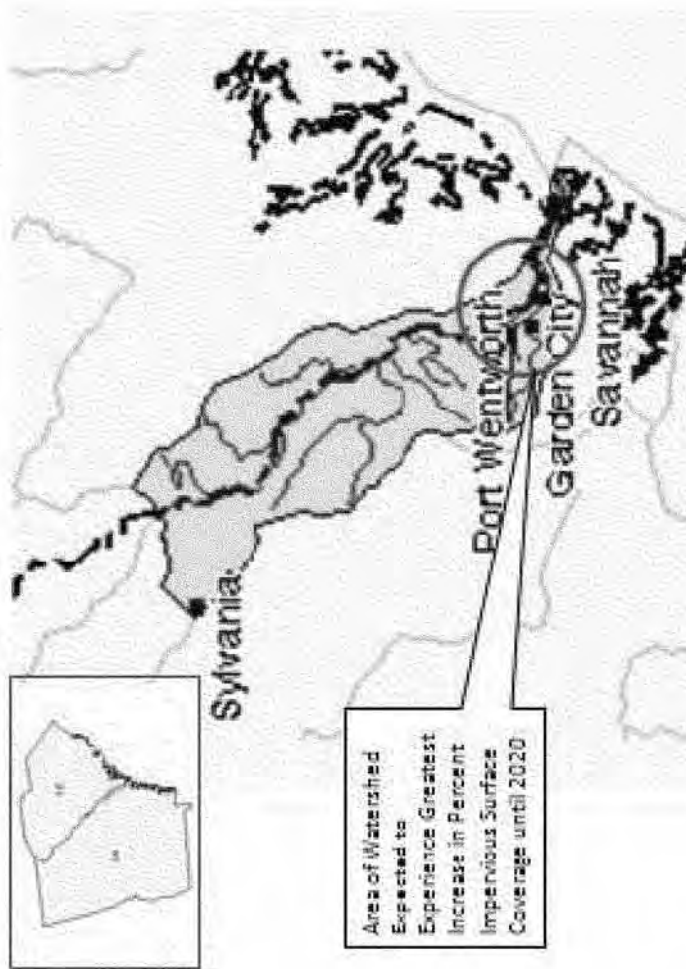

From: http://cfpub.epa.gov/surf/huc.cfm?huc_code=03060109

Figure 57. Lower Savannah Watershed Identified with Area of Greatest Percent Increase In Percent Impervious Surface Coverage.

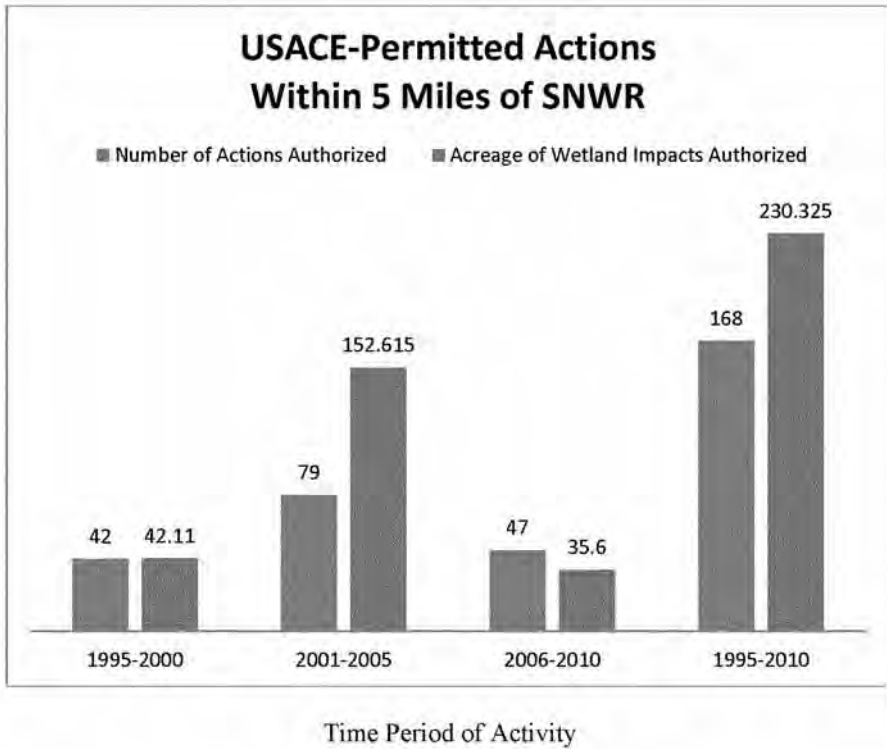


Figure 58. Number of USACE-permitted actions and acreage of wetland impacts authorized during the past 15 years within 5 miles of SNWR.

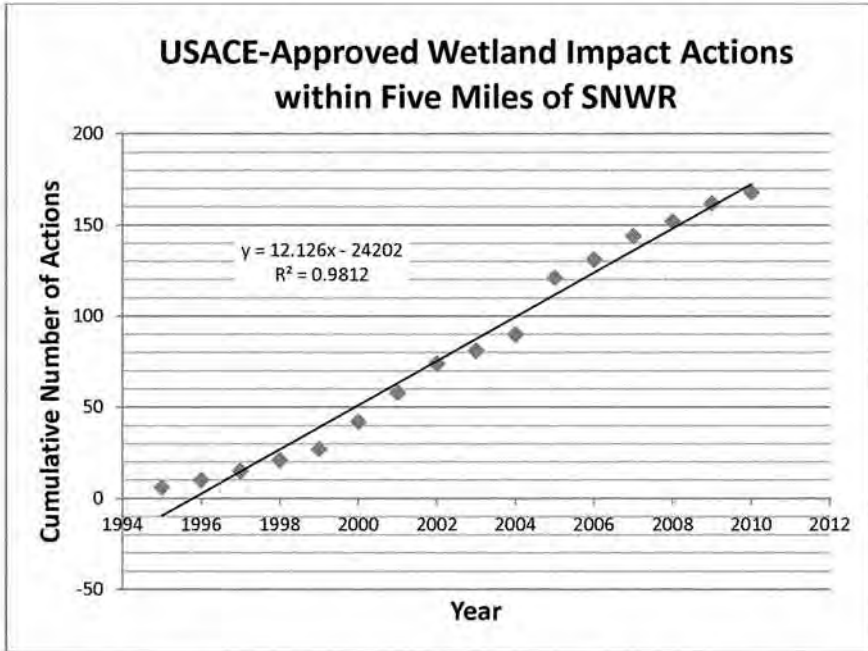


Figure 59. Cumulative Number of USACE-Permitted Actions Over Time

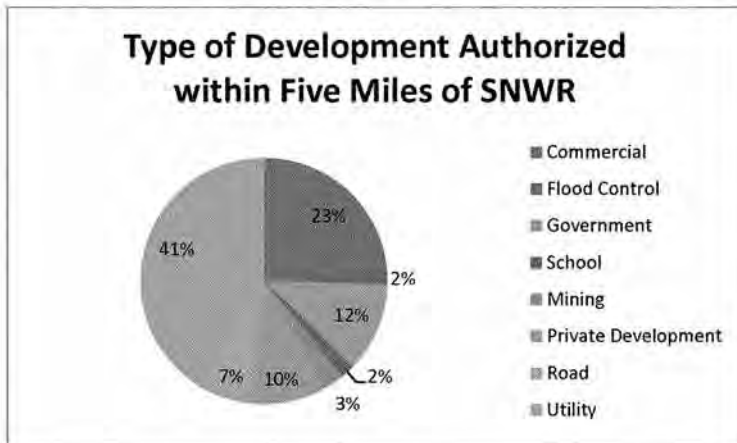


Figure 60. Type of USACE-permitted activity that has occurred within 5 miles of SNWR as a percentage of the total 168 actions.

- The USACE also evaluated water quality impairments using USEPA's MyWATERS Mapper (www.watersgeo.epa.gov). This version of MyWATERS Mapper depicts the status of NPDES permits for each State, summary information from the Clean Watershed Needs Survey, and water quality assessments. A review of the Impaired Waters Layers identified three impaired water points on the Savannah River, from south of Savannah Electric's Plant McIntosh to the mouth of the Savannah River (Please see following table). These impaired water points have been identified relative to features located on the vicinity map as well as the approximated boundaries of the SNWR. The following table also provides information concerning the cause of impairment and designated use for the waters where samples have been collected. Data for these sites and the associated designation was acquired during the 2008 cycle.

Impaired Water Points/Locations, Causes and Designated Use

Sample I.D.	Cause of Impairment	Impairment Group	Designated Use	State TMDL
244972	Mercury	Mercury	Fish Consumption	Needed
244965	Fecal Zinc	Pathogens Metals	Aquatic Life Support (Both)	Needed Needed
276597	Mercury	Mercury	Fish Consumption	Needed

As depicted in Figure 61, the Impaired Water Points are located in the Savannah River at locations that are adjacent to the SNWR. The impairments associated with these waters suggest that existing commercial, industrial and residential land use maybe contributing to the degradation in reported water quality. Previous USACE permitting data suggests that areas in the vicinity of the SNWR (< 5 miles away) will continue to urbanize in the future. Thus, it is reasonable to assume that these future-anticipated conversions in land use will have a negative effect on the water quality within the SNWR. However, the integration of land buffers adjacent to the SNWR would help to ameliorate any long-term direct and/or secondary impacts by preventing additional development in such close proximity.

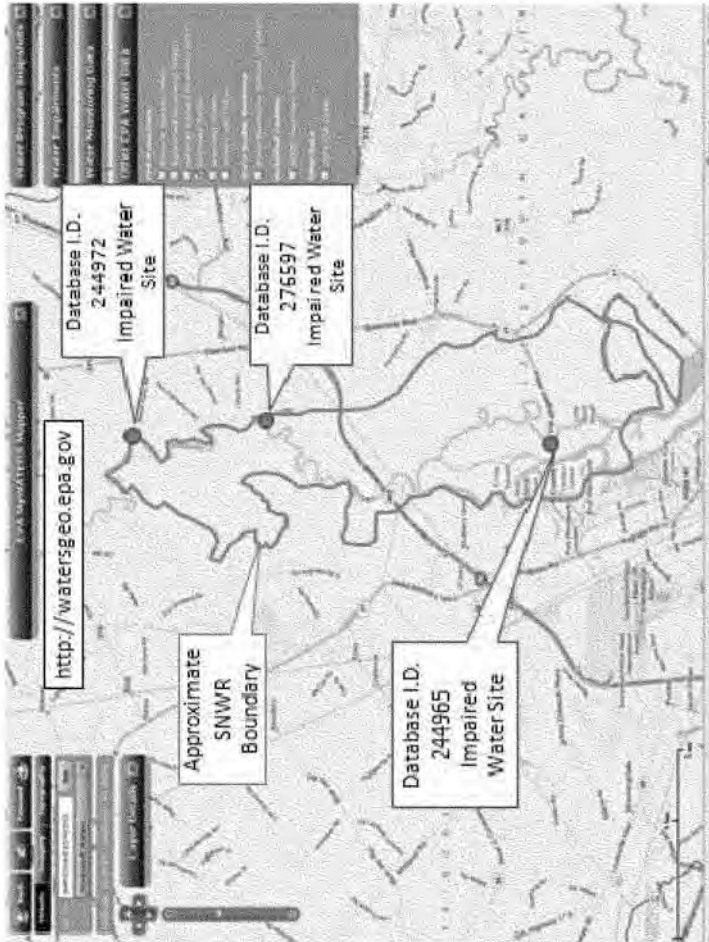


Figure 61. Approximate SNWR Boundary and Location of Impaired Waters in Lower Savannah River.

- The Corps assembled and used a Wetland Interagency Coordination Team (ICT) consisting of technical expert representatives from USACE, Federal natural resource agencies, and State natural resource agencies representatives to identify acceptable mitigation for the proposed project. At that time, USFWS stated that mitigation actions must be performed within the basin for impacts to wetlands residing within the SNWR. The Service recommended preservation of lands as a possible solution and recommended sites that are part of their long term lands acquisition strategy to compliment the SNWR.

The Corps also consulted with the Stakeholder Evaluation Group, including its Non-Governmental Organizations (NGOs) members, to identify any other suitable mitigation alternatives. Over the 10-year study period, no agency or organization could identify another feasible alternative as mitigation for impacts that would occur as a result of wetland conversion.

As an information need, the USACE also determined the extent of project influence on freshwater marsh, brackish marsh and salt marsh. The functional assessment provided in previous sections described impacts to 337 acres of freshwater marsh and the associated fish and wildlife habitat (See functional assessment). The approximate freshwater marsh contour (0.5 ppt salinity threshold) that would result with a 48-foot project is indicated in Figure 62. Following project construction, marsh systems immediately downstream of that contour line would be more closely aligned with brackish marsh. Also downstream of that contour line is an area of the harbor that is heavily industrialized and subject to continuous manmade perturbations via dredging, industry operation, or other port-related activities (Figure 62). These two circumstances preclude the identification of potential freshwater marsh mitigation sites downstream and in the vicinity of the 0.5 ppt contour line.

When trying to identifying long-term and self-sustaining wetland mitigation, it is also important to recognize that coastal ecosystems are very dynamic and subject to natural variation. Regardless of the SHEP, marsh areas in the Lower Savannah River Watershed and other coastal areas are susceptible to natural transitions and vegetative shifts when environmental conditions change (North Carolina DENR Draft Report, 2010). The extent and duration of that change will dictate the magnitude of conversion within a marsh (White and Alber, 2009). Changes in marsh composition have been observed in a period of 1 year in association with drought periods (Davis, 2004). Drought conditions, storm events and sea level rise all have the potential to influence the vegetative composition of marsh habitats within the Lower Savannah River Watershed. The approximated marsh areas that could be subject to such future influences are identified within the dashed area in Figure 57. Although no opportunities were available to provide tidal freshwater marsh restoration in any area of the Lower Savannah River Watershed, the rationale presented in this section provides justification for why tidal freshwater wetland mitigation sites east of Interstate 95 would not be sustainable.

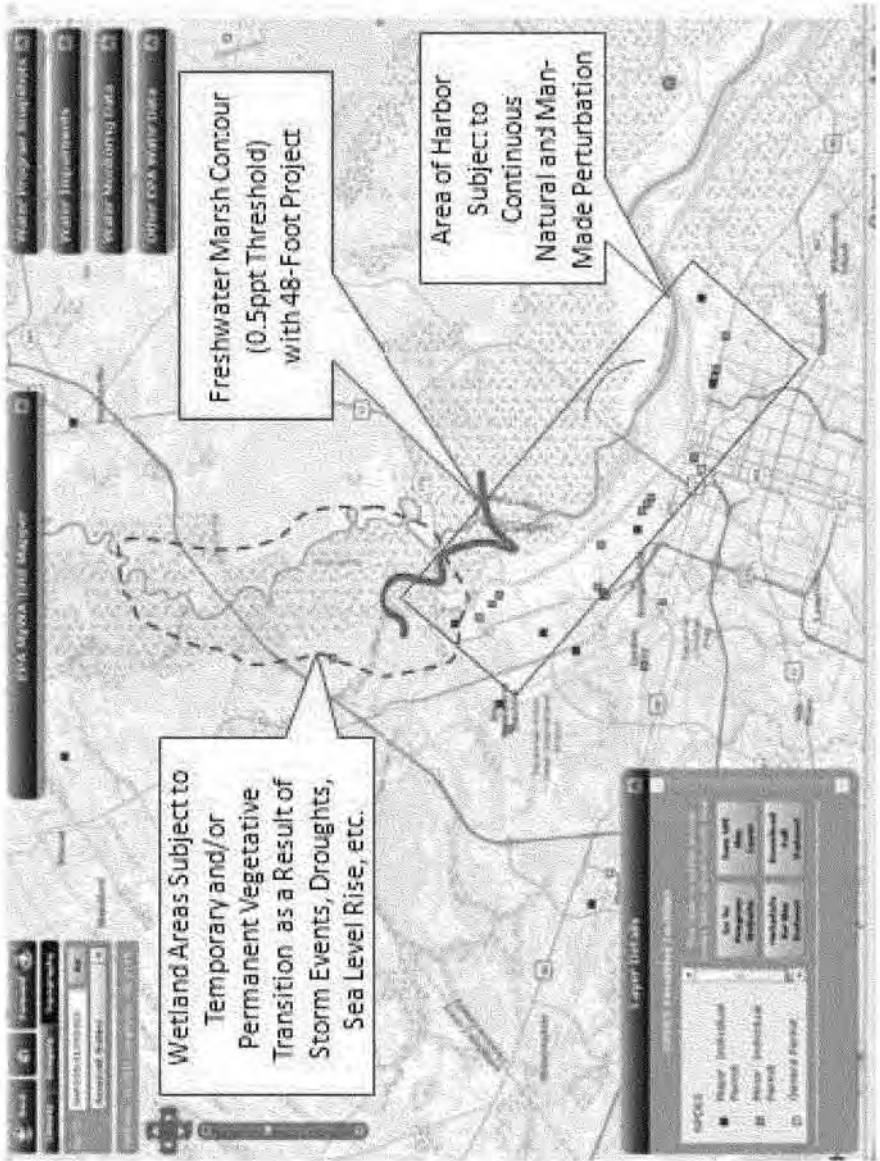


Figure 62. Project-Related Impacts, Existing Land Use, and Other Influences on Vegetative Shifts in the Savannah Harbor.

- From a geographic standpoint, mitigation opportunities west of Interstate-95 and in close proximity to SNWR represents the next logical location for identifying wetland mitigation opportunities that would still provide "In Basin" mitigation. The SHEP project will result in the vegetative conversion of 337 acres of tidal freshwater marsh to brackish marsh. Consequently, the USACE's functional assessment concluded that fish and wildlife habitat would be the key wetland function impacted as a result of the conversion. However, similarities in wildlife composition would remain between habitats. For example, insect abundance and diversity have been reported as similar in salt and freshwater marsh systems (Brinson *et al.*, 1981). Muskrats are also known to be common in both tidal fresh and brackish marsh (Brinson *et al.*, 1981, Odum, 1984). Still others have observed reptiles such as black rat snakes (*Elaphe obsoleta*), brown water snakes (*Nerodia taxipilota*), and diamondback terrapins (*Malaclemys terrapin*) in both tidal freshwater marsh and brackish marsh systems located in the Chesapeake Bay National Estuarine Research Reserve (Perry, J.E. and R.B. Atkinson (1997).
- The USACE's functional assessment concluded that fish and wildlife habitat would be the key wetland function impacted as a result of the conversion. However, similarities in fish composition have also been established in the Savannah River Estuary (SRE) habitats (i.e., tidal freshwater marsh <1 ppt; Oligohaline (1-5 ppt); Mesohaline (5-15 ppt); and Polyhaline (> 15ppt)), and variability in distribution has been attributed to seasonal trends. As illustrated in the following table, spatial patterns in fish distribution are not discernable particularly in the <1 ppt to 15 ppt salinity range.

Totals for All Species

Polyhaline (>15 ppt)				Mesohaline (5-15 ppt)				Oligohaline (1-5 ppt)				Tidal Freshwater (<1 ppt)			
F	W	Sp	Su	F	W	Sp	Su	F	W	Sp	Su	F	W	Sp	Su
141	324	724	3731	1297	1165	9582	14147	2953	4616	5448	6264	1627	3401	7967	4071
TOTAL: 4,920				TOTAL: 26,191				TOTAL: 19,281				TOTAL: 17,066			

Estuarine generalist fish species including: Bay anchovy, Atlantic menhaden, Atlantic croaker, spot, other drum species, gobies, blueback herring, Southern flounder, and striped mullet dominated the fish densities in habitats and comprised over 90 % of the total number of fishes collected. Generally, most of the 91 fish species sampled from the SRE could be considered estuarine generalists that were present in most habitat types during most seasons. Jennings and Weyers (2003) report this finding was not surprising because the variability in salinity distribution in the SRE created a mosaic habitat pattern influenced by tidal fluctuation and river discharge. Many areas of the SRE had different salinity-based habitats in a 6-hour tidal period and from year 1 to year 2 when river discharge was different. The most abundant species seemed capable of using all of the habitats found in the SRE. Statistical comparisons of mean fish density and mean species richness gave variable results. Most variation in fish distributions was attributed to seasonal trends. Density and richness were lowest in fall when many species disappeared from sample reaches and abundances of other species decreased across the estuary.

Jennings and Weyers (2002) also normalized the number of fish found in tidal creeks by the volume of water in which the fish were retrieved (See Figure 55). This work was completed in tidal creeks for each of the estuarine environments that have been previously discussed. In brief, the authors found no statistical difference in the density of fish or species richness when comparing all four estuarine environments (Tidal Fresh, Oligohaline, Mesohaline, and Polyhaline).

Jennings and Weyers (2002) also normalized the number of fish found along the marsh edge by the volume of water in which the fish were retrieved (See Figure 56). This work was completed along the marsh edge for each of the estuarine environments that have been previously discussed. In brief, the authors found a statistical difference in the density of fish when comparing tidal freshwater marsh to oligohaline and mesohaline marsh. However, there was no statistical difference in species richness when comparing all three of the estuarine environments that have been identified within marsh areas susceptible to vegetative conversion (i.e., tidal fresh, oligohaline, and mesohaline).

- In addition, data reported in the literature for Savannah Harbor suggest that a shift in vegetation (from freshwater marsh to brackish marsh) in this estuary does not occur until salinity concentrations approach 2.5 ppt (Latham et al., 1994). Even at oligohaline marsh sites with average salinity concentration of 2.1 ppt, a discriminant function (DF) analysis revealed that only 47% of cases resulted in the correct pairing of environmental variables with vegetative species composition and dominance. At those same oligohaline sites, 37% of the vegetative species composition and dominance were more closely aligned with a freshwater classification (Latham et al., 1994). The USACE's salinity value that denotes a defined shift from freshwater to brackish marsh (i.e., 0.5 ppt) is approximately 5 times lower than what has traditionally been observed with 100% vegetative shifts *in situ* within the Lower Savannah Watershed (Latham et al., 1994) and other coastal marsh systems in the southeastern United States (NOAA, 2010). Thus, many of the existing freshwater emergent plant species, and associated ecological parameters, will likely be sustained in areas predicted to experience salinity concentrations in the range of 2.5 ppt.

With respect to the SNWR, similarities in support of fish and wildlife habitat also overlap between bottomland hardwood wetlands and freshwater marsh wetlands. All of the previously identified species would be common within freshwater marsh and bottomland hardwoods. In addition, Threatened and Endangered Species such as American alligator, American bald eagle, and Wood stork are thought to inhabit and/or use both types of wetlands within the SNWR (SNWR 2011). Kirkland's warblers may also stop at the SNWR during their migration and utilize both freshwater and bottomland hardwood wetlands. Bottomland hardwoods also support freshwater fish and their associated habitat by capturing and filtering stormwater before the resulting surface water discharges into creeks and open water habitats.

- In closing, the USACE has considered the scope and scale of the proposed impacts as well as the functions that would be lost as a result of the impacts. The USACE is satisfied that the level of information provided in this section satisfies the watershed approach and analysis as outlined in the Final Mitigation Rule.

When evaluating possible mitigation options, the USACE also satisfied the criteria for evaluating mitigation options as reflected in the determination of a *Watershed Scale*, which is defined at 33 CFR 332.3 (c)(4). For purposes of our analysis, we established the Lower Savannah River Watershed as the appropriate scale to assess impacts and mitigation opportunities. The Lower Savannah River Watershed is also defined by the 8-digit Hydrologic Unit Code (HUC) 03060109. Characteristic of this watershed maybe found in previous sections of this analysis. The selection of this watershed scale is supported by the historical review of projects requiring USACE permits and the associated cumulative impacts analysis that considers past, present and reasonably foreseeable future impacts within the same 8-digit HUC. Additionally, most state and Federal resource agencies use a watershed approach that has typically been scoped using an 8-digit hydrologic unit code (NRCS, 1997).

1.4 Evaluation of Site Selection for Permittee-Responsible Mitigation

When evaluating possible mitigation options, USACE also reflected on the guidance identified as *Site Selection*, which is defined at 33 CFR 332.3 (d)(1-3) of the Final Mitigation Rule. The following facts are presented in compliance with regulations 1-3 that were previously cited.

- USACE prepared a wetland comparative analysis when considering the SHEP-derived conversion of freshwater wetland, wetland threats reported for the Lower Savannah River Watershed, function of wetland systems, opportunities for mitigation, and long term sustainability (Please see following table). The comparative analysis evaluated the three types of wetlands commonly observed within the Lower Savannah River Basin and assessed similarities/differences based on function and threat. The analysis was also structured toward an evaluation of freshwater wetlands functions that are most susceptible to impacts from the SHEP (See functional assessment section). A ranking system was then used to characterize each sub-element of threat or function being considered. In brief, the values "High", "Medium", and "Low" were assigned values of 30, 20, and 10, respectively. The basis for the rankings is supported in previous sections of this document. Once values were assigned, the sum total derived for overall Threats was subtracted from the value for overall Function, which resulted in a Total Comparability Score. The resulting scores for each wetland type were then compared. When taking into consideration: (1) predominant function (i.e., fish and wildlife habitat) impacted as a result of freshwater marsh conversion, (2) opportunities for mitigation, (3) threats to wetlands in the watershed, and (4) long-term sustainability, the freshwater marsh and bottomland hardwood wetlands have the same resulting score. These same or similar scores suggest that bottomland hardwood wetlands would provide suitable mitigation for the replacement of freshwater marsh function that is impacted as a result of SHEP. This analysis also takes into consideration a watershed assessment that illustrates the overall threats internal to the Lower Savannah River Watershed. In contrast, the negative value derived for the brackish marsh is indicative of the expansion of brackish marsh acreage that would occur as a result of the SHEP and the lower assigned value for

supporting freshwater biota. Thus, brackish marsh as a mitigation option would not be practicable.


Consideration of Wetland Mitigation Based on Watershed Analysis of Threats and Functional Assessment in Conjunction with SHEP-Derived Impacts to Wetlands			
THREATS	Freshwater Marsh (0-0.5 ppt)*	Bottomland Hardwood	Brackish Marsh (0.5-4 ppt)*
SHEP Impacts	Medium (conversion)	N/A	N/A (increase in acreage)
Threat from Direct Impacts Associated with Coastal Sprawl	Low	High	Low
Threat from Indirect Impacts Associated with Coastal Sprawl	Medium	High	Medium
Subject to Conversion as a Result of Storm, Drought, Sea Level Rise	High	Low	Medium
SUBTOTAL	60	70	50
FUNCTION	Freshwater (0-0.5 ppt)*	Bottomland Hardwood	Brackish Marsh (0.5-4 ppt)*
Support Freshwater Avian and Terrestrial T&E Species	High	High	Low
Support Freshwater Terrestrial Wildlife	High	High	Low
Support Freshwater Fish Species	High	Medium	Low*
Mitigation Opportunities in Lower Savannah Watershed	Low (non-existent)	High	N/A
SUBTOTAL	100	110	30
TOTAL COMPARABILITY SCORE (= Function-Threats)	40	40	-20

High = 30

Medium = 20

Low = 10

* Literature indicates that freshwater marsh characteristics can exist up to 2.5 ppt on salinity continuum. Therefore, overlap with brackish marsh salinity suggest support for freshwater fish species in the salinity range of 0-2.5 ppt.



- When considering mitigation options that take into account the previous analysis, mitigation with bottomland hardwoods would provide compensation for impacted functions associated with the conversion of 337 acres of freshwater marsh to brackish marsh. Additionally, the Corps' assessment of watershed needs concluded that the SNWR and all of the associated wetland habitats are currently subject to stressors associated with urbanization. Total current refuge acreage consists of 29,175 acres of freshwater marshes, tidal rivers and creeks, and bottom land hardwoods (USFWS, 2010). The following table from the USFWS's Draft Comprehensive Conservation Plan (2010) provides the acreage associated with each of the habitat types located on the SNWR. Figure 63 illustrates the general habitat types with respect to location on the SNWR (USFWS, 2010).

Acreages of Habitat Types on Savannah National Wildlife Refuge

Habitat Type	Acres
Bottomland hardwood	6,546
Harwood hammocks	437
Upland Pine	275
Cypress-Gum Swamp	10,398
Mixed Hardwoods	883
Grassland Field	155
Upland Hardwood	178
Managed Impoundments	3,000
Tidal Marsh	7,192
Right-of-ways	24
Administrative Areas	87
Total	29,175

The Refuge is dominated by forested wetlands to the north with oak hammocks located toward the interior. The southern refuge boundary is comprised of tidal marsh, scrub/shrub, freshwater impoundments and freshwater marsh.

- Figure 64 obtained from the USFWS's Draft Comprehensive Conservation Plan illustrates the areas proposed for long term acquisition (yellow line) and the existing boundaries of the SNWR (red line). The sites that will be acquired as mitigation for SHEP are located in the green ellipses. The two sites are known as the Mill Creek property (1,122 total acres) and the Abercorn Island property (1,989 total acres). The properties comprising Mill Creek and Abercorn Island are characterized by wetlands and upland. The wetlands are classified as bottomland hardwood forest, dominated by old-growth oaks, cypress, sycamore and sweetgum. The sites are both temporarily and seasonally flooded and/or forested wetland (USFWS, 2007) (See Functional Assessment for characteristics of preservation sites).

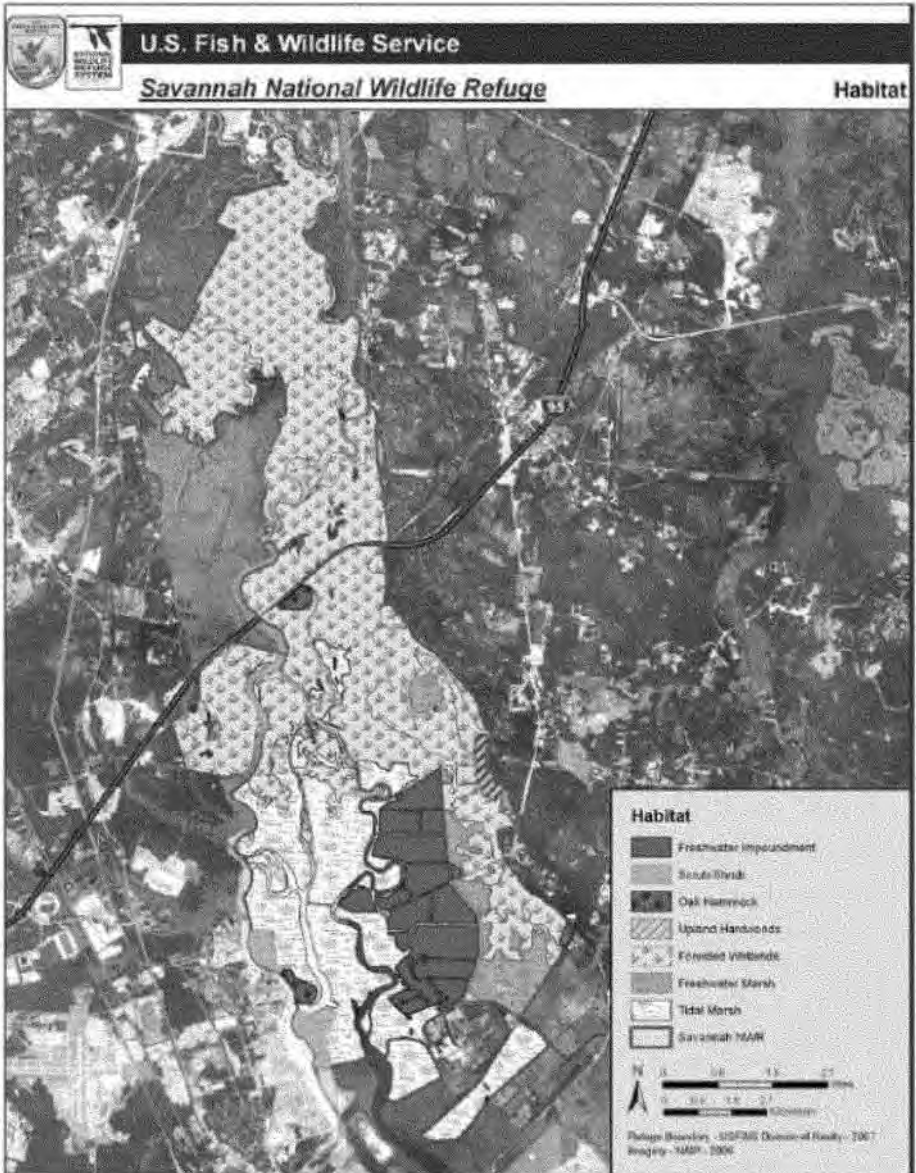


Figure 63. Habitat Types within SNWR Boundaries

Savannah Island National Wildlife Refuge Acquisition Boundary

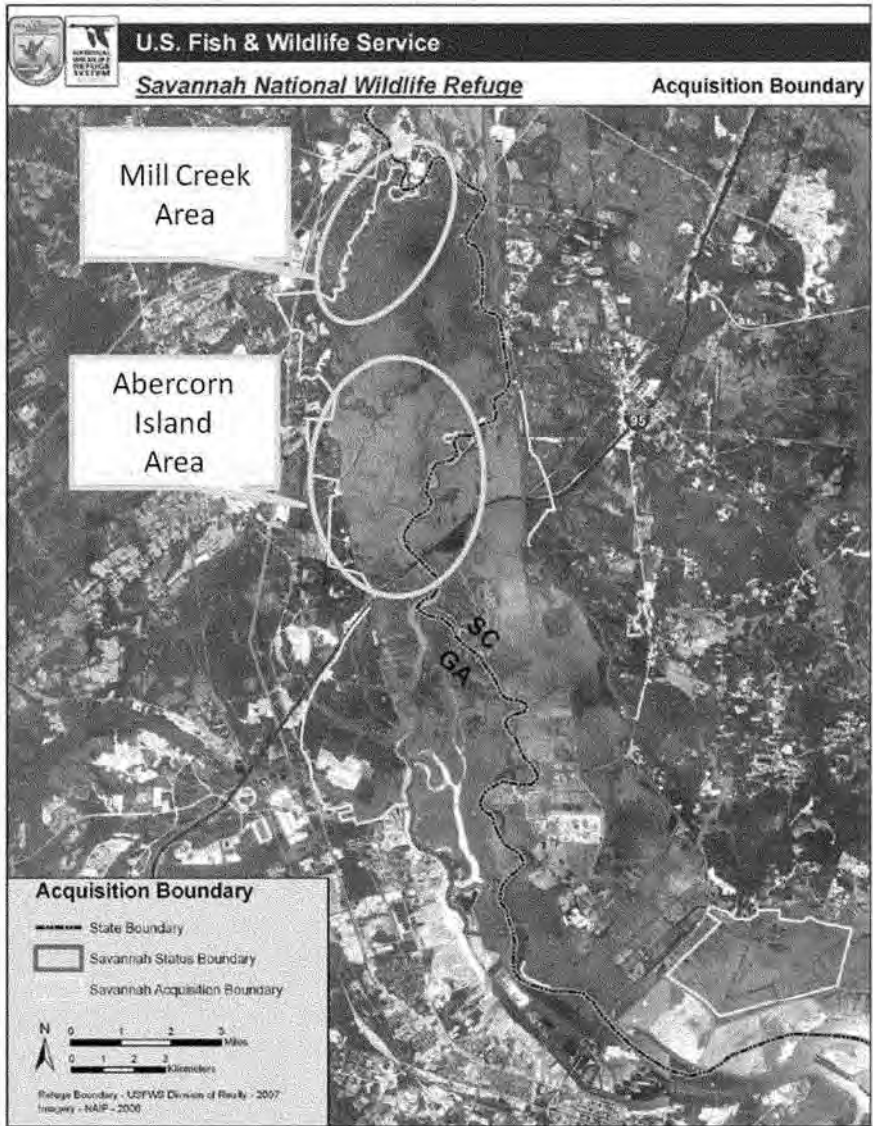


Figure 64. Areas proposed for Acquisition

- Preservation of wetlands and upland buffers adjacent to the existing SNWR is a sustainable approach to mitigation that results in the expansion of the refuge property; protection of wetlands and upland buffers, the expansion/protection of wildlife corridors; reduction in likelihood of future indirect impacts associated with stormwater runoff and septic systems; and decrease risk of wildfire probability that comes with development and human encroachment.
- The Mill Creek and Abercorn Island areas are approximately 1,122 acres and 1,989 acres in size, respectively. Like the forested wetlands areas of the SNWR depicted in Figure 63, both the Mill Creek and Abercorn Island parcels would provide similar ecological values with respect to aquatic habitat and connectivity with the existing wildlife habitat corridors within the SNWR. The lands proposed for preservation are completely compatible with the existing use of adjacent lands (i.e., SNWR), and acquisition of such lands would promote USFWS's Draft Comprehensive Conservation Plan. Integration of the 2,683 acres of wetland and upland buffer would be an approximate 9.1 percent increase in the total acreage of the SNWR. The additional lands would have a positive, net beneficial effect on wetlands and water quality as well as fish and wildlife habitat values within the SNWR and the surrounding area. Given the protective measures that would be afforded the 2,683 acres and the existing land use associated with the adjacent 29,175 acres (i.e. acreage associated with SNWR), this compensatory mitigation project would provide a substantial buffer for a very fragile, intact ecosystem. In the foreseeable future, this mitigation plan would also prevent any additional degradation of waters that comprise the SNWR and provide lasting protection to ecosystems that serve as habitat for several Threatened and Endangered species.
- Issues concerning development trends in the area of the mitigation sites were reported in previous sections of this analysis. Likewise, the local and regional goals for the restoration or protection of particular habitat types or functions have already been discussed. Finally, the 2,683 acres of wetland preservation that is being provided as compensatory mitigation is adjacent to arguably the most valuable, contiguous 29,175 acres of aquatic resources in the Lower Savannah River Watershed.
- The latest version of the Refuge's Acquisition Plan is dated July 2007 and is included in the document titled "Final Environmental Assessment and Land Protection Plan; Proposed Expansion of Savannah National Wildlife Refuge". As defined in the plan, *"the proposed acquisition would protect a biologically diverse complex of wetlands with high ecological values for numerous plants and animals."* and *"project lands acquired as part of the refuge would be managed in a manner that would protect and enhance the fish and wildlife habitat values they provide."* By acquiring lands adjacent to the SNWR, and thereby expanding the Refuge, a primary initiative of the National Wildlife Refuge System Improvement Act of 1997 is also satisfied. It also satisfies major objectives of Georgia and South Carolina's Comprehensive Wildlife Conservation Strategies.

1.5 Evaluation of Permittee-Responsible Mitigation with Respect to Mitigation Type, Mitigation Amount, Mitigation Hierarchy and Preservation

When evaluating possible mitigation options, the USACE also reflected on the guidance identified as (e) *Mitigation Type*, (f) *Amount of Compensatory Mitigation*, (g) *Use of Mitigation Banks and In-Lieu Fee Programs*, and (h) *Preservation*, which is defined at 33 CFR 332.3 (e-h) of the Final Mitigation Rule. The following facts are presented in compliance with regulations e-h that were previously cited.

- The proposed preservation of 2,683 acres consists of bottomland hardwoods, maritime forest and uplands dominated by deciduous forest and regrowth. The bottomland hardwoods are classified as palustrine, forested, broad-leaved deciduous systems that are both temporarily and seasonally flooded. Preserving these areas would ensure wildlife habitat is protected in perpetuity. Moreover, the additional lands would buffer the SNWR from future threats of development such that changes in land use would not occur immediately adjacent to existing areas of the Refuge that do contain emergent wetland characteristics. Thus, the acquisition and preservation of 2,683 acres of wetland and upland buffer provides a functional replacement for the minor conversion of the only wetland function (i.e., fish and wildlife habitat) that would be expected as a result of the 337 acre freshwater to brackish marsh conversion (See previous sections).
- USACE conducted a watershed assessment in the Lower Savannah River Harbor to evaluate the mitigation opportunities that would compensate for the vegetative conversion of 337 acres of freshwater wetland. The District conducted this watershed assessment in conjunction with the results of the functional assessment that concluded the only element of wetland function that would be impacted as a result of the conversion was fish and wildlife habitat. USACE has again reviewed the listing of approved mitigation banks in the Lower Savannah River Watershed. As of this response date, there are no mitigation banks established with tidal, freshwater wetland characteristics. Additionally, the In-Lieu Fee program has not been updated or approved by the USACE and Interagency Review Team (IRT) to provide compensation at this time. The USACE also looked for opportunities to provide "In Basin" restoration and/or enhancement of tidal, freshwater wetlands. However, no sites were identified in a 10-year period of time. The USACE also considered the creation of freshwater, tidal wetlands. The USFWS determined that wetland creation which would be derived from upland areas has a very high risk of failure. Ultimately, the USACE determined that the creation of freshwater, tidal wetlands was not a viable option, and for the duration of the project, a created freshwater system would not be sustainable.
- The Corps assembled and used a Wetland Interagency Coordination Team (ICT) consisting of technical expert representatives from USACE, Federal natural resource agencies, and State natural resource agencies representatives to identify acceptable mitigation for the proposed project. At that time, USFWS stated that mitigation actions must be performed within the basin for impacts to wetlands residing within the SNWR. The Service recommended preservation of lands as a possible solution and recommended sites that are part of their long term lands acquisition strategy to compliment the SNWR.

The Corps also consulted with the Stakeholder Evaluation Group, including its Non-Governmental Organizations (NGOs) members, to identify any other suitable mitigation alternatives. No restoration or enhancement sites (including tidal freshwater marsh or bottomland hardwood) were identified. Over the 10-year study period, no agency or organization could identify another feasible alternative as mitigation for impacts that would occur as a result of wetland conversion. Therefore, the USACE proceeded with the identification of preservation sites.

- In compliance with 33 CFR 332.3 (f)(1), the Savannah District Regulatory SOP was used as a tool to determine an acceptable amount of preservation acreage required to offset the vegetative conversion of wetlands. The approach for use of the SOP was approved by the ATR and other agency representatives. In summer 2003, the Corps assembled a Wetland Interagency Coordination Team (ICT) to assist in its analysis of potential wetland impacts from the SHEP. The team consisted of agency wetland experts from USEPA, USFWS, NMFS, GA DNR, SC DNR, and SC DHEC. The agencies identified an acceptable technical approach to determine wetland impacts. They also identified the information needs they would have when they reviewed the DEIS. Since creation of the team, the USACE hosted 7 meetings of the ICT. The Corps conducted an Agency Technical Review (ATR) to assess the use of Savannah District's Regulatory SOP as a tool in the development of a mitigation plan for SHEP. The ATR was lead by the National Deep-Draft Navigation Planning Center of Expertise and was performed by Corps experts in the Engineering Research and Development Center in Vicksburg, MS. The ATR was to determine if the SOP was an appropriate method to determine the preservation acreage needed to compensate for impacts resulting from the SHEP. The ATR was also conducted to comment on the reasonableness of the assumptions and calculations that Savannah District used in applying the SOP for the SHEP. The SOP was used only to determine the amount of preservation acreage necessary to offset the remaining acreage impacted after development of avoidance, minimization, and restoration features. The ATR concurred with use of the SOP to determine the amount of preservation acreage needed and considered Savannah District's application of the SOP to be reasonable in quantifying impacts and the associated mitigation that would be required. The USFWS provided a Fish and Wildlife Coordination Act Report, dated August 2010. In that report, the USFWS concurred with use of the SOP, which calculated a need to preserve 2,683 acres of land adjacent to the SNWR for the 48-foot alternative. The Service provided updates to the SOP calculations in Appendix A of the report. The USACE concurred with use of the updated SOP worksheets and adopted the results of those calculations for use in the DEIS. The USFWS provided a Final Fish and Wildlife Coordination Act Report in March 2011. That report reiterated the approval of the USFWS, SC DNR and GA DNR in the use of the SOP and its specific application to the proposed harbor deepening alternatives. In its Adaptive Management Program, the USACE also proposed acquisition of up to an additional five percent of wetlands if monitoring demonstrates that wetland impacts are under predicted.
- 33 CFR 332.3 (h) (1) (i-v) of the 2008 Mitigation Rule states, *"Preservation may be used to provide compensatory mitigation for activities authorized by DA [permits] when all the following criteria are met: (i) The resources to be preserved provide important*

physical, chemical or biological functions for the watershed; (ii) The resources to be preserved contribute significantly to the ecological sustainability of the watershed. In determining the contribution of those resources to the ecological sustainability of the watershed, the district engineer must use appropriate quantitative assessment tools, where available; (iii) Preservation is determined by the district engineer to be appropriate and practicable; (iv) The resources are under threat of destruction or adverse modifications; and (v) The preserved site will be permanently protected through an appropriate real estate or other legal instrument (e.g., easement, title transfer to state resource agency or land trust)."

Based on the Corps' analysis and coordination with the natural resource agencies that participated in the Wetland ICT, the USACE has (i) concluded that the preserved lands provide important physical, chemical and biological functions for the SNWR, the Savannah Harbor, and the Lower Savannah Watershed (see response to request for Functional Assessment); and (ii) the preserved lands will contribute to the sustainability of the watershed by ensuring the functions of bottomland hardwood wetlands on these properties are sustained in perpetuity, and the SNWR will be protected with a significant area of land that will function as a buffer in perpetuity. The preservation tracts will also enhance lands already within the SNWR by functioning as a buffer; and (iii) for the reasons identified in (i) and (ii), the District Engineer has determined that preservation of these 2,683 acres is appropriate and practicable; and (iv) the USACE and other entities anticipate that the Savannah Harbor, and areas surrounding the SNWR, will continue to experience population growth, industrial/commercial development, and changes in land use. In addition to the industrial developments that have been permitted by the USACE in recent years, the US Geological Survey, Water Science Center (GaWSC) commented on the large number of industrial facilities and associated impacts that are anticipated on lands in close proximity to the Georgia Ports Authority and the SNWR. Preservation of the 2,683 acres ensures aquatic resources on the associated properties will be protected in perpetuity. The preserved land will provide additional buffer so that any future development in the vicinity will not result in a secondary and/or indirect impact to existing Refuge lands. There is also a threat that subtle changes in adjacent land use will also have a detrimental impact on the SNWR. By way of example, a Public Notice published by the Charleston District, Corps of Engineers on September 28, 2009, requests comment on a proposal from a private landowner to divert tidal water flow onto an approximately 693-acre property to increase the hydrology on 485 acres of previously-existing rice impoundment. The 693-acre property, which would be used as a mitigation bank, presently provides benefits to migratory waterfowl during migratory stops similar to those provided by Refuge lands. Conversion of such acreage to saltmarsh could shorten their stay in the area and result in the birds that the Refuge serves resuming their migration with less rest. The expected effects of the proposed Regulatory action on the SNWR have not been quantified at this time, but the proposed project is an example of the continued threat that manipulation of adjacent lands pose to the SNWR and the resources it protects. Acquisition and preservation of the proposed 2,683 acres as mitigation for the SHEP project would provide additional buffer and protection from these type of activities as well; and (v) preservation of the 2,683 acres will include a restrictive covenant and the recording of a conservation easement with conveyance of the

property to the USFWS. Collectively, the information provided in this response justifies the preservation of 2,683 acres adjacent to the SNWR as satisfying the mitigation requirements for the conversion of freshwater and saltmarsh wetlands.

- 33 CFR 332.3(h) of the 2008 Mitigation Rule states, “Where preservation is used to provide compensatory mitigation, to the extent appropriate and practicable the preservation shall be done in conjunction with aquatic resource restoration, establishment, and/or enhancement activities. This requirement may be waived by the district engineer where preservation has been identified as a high priority using a watershed approach described in paragraph (c) of this section, but compensation ratios shall be higher.” The USACE has provided a watershed approach that was used to evaluate the selection and acceptability of the proposed preservation mitigation. The District’s watershed assessment concluded that preservation of 2,683 acres of bottomland hardwood and upland adjacent to the SNWR was a high priority mitigation alternative for the Lower Savannah River watershed. Furthermore, the functional assessment of the impacts to tidal, freshwater wetlands and the benefits of the proposed mitigation sites concluded that the acreage proposed for preservation was an appropriate compensation ratio. Additional information on the appropriateness of USACE’s compensation ratios maybe found in subsequent bullets.
- EPA’s 2001 Region 4 Compensatory Mitigation Policy provides examples of preservation projects that were used to offset impacts to aquatic resources. USEPA describes these examples as, “preservation projects that have accomplished the goals of the Clean Water Act while meeting the specific goal of the management agencies that accepted or will accept the preserved wetlands.” A project known as Walker Ranch in Osceola and Polk Counties, Florida, is included as an example project. In brief, Walker Ranch (8,500 acres) was purchased and preserved by the Disney Development Company as mitigation for filling approximately 600 acres of wetlands (Stutzman, 1992). The Orlando Sentinel newspaper reported this action as the “one of the largest wetlands losses ever requested in Florida at one time” (Regan, 1991). Although the mitigation-to-impacts ratio is 14:1, the preservation mitigation was provided in exchange for the irretrievable and complete loss of 600 acres of swamp and pristine wetland. All elements of wetland function were lost as a result of filling and/or draining of those 600 acres.
- Preservation of 2,683 acres (consisting of bottom land hardwoods and upland buffer) is more than sufficient to offset any conversion in freshwater wetland vegetation that might occur. Considering the vegetative conversion that is expected, the mitigation-to-impacts ratio of roughly 8:1, which is consistent with ratios recommended in the 2001 EPA Region 4 Compensatory Mitigation Policy concerning wetland preservation. Using the DF analysis reported by Latham et al (1994) which aligned 37% of freshwater species with oligohaline sites, the 337 acres of freshwater to brackish marsh conversion is reduced further such that the mitigation-to-impacts ratio is increased to 12:1. It is important to reiterate that the SHEP impact would be a shift in vegetation, and that these wetlands would still provide the ecological functions associated with emergent wetland systems. This is significantly different from other example projects identified in EPA

Region 4 Mitigation Policy where preservation was used for the irretrievable *and complete loss* of wetlands.

- The USACE has used a watershed approach when identifying and establishing the 2,683 acres of preservation as mitigation for the 337 acres of freshwater marsh conversion to brackish marsh. Using a watershed approach, these areas of preservation have been identified as high priority mitigation (33 CFR 332.3(h)(2)). As such, the USACE has determined that acquisition of these lands shall satisfy the complete mitigation requirement in conjunction with the establishment of the resulting brackish marsh system. The information provided in the previous bullet illustrates that the mitigation preservation ratio would be 12:1. Given the impact to tidal freshwater marsh would result in a vegetative conversion with minor impacts to fish and wildlife habitat, the mitigation ratio is satisfactory and also compliant with EPA Region 4's Mitigation Policy.

1.6 Evaluation of Permittee-Responsible Mitigation and Responsible Parties

The Final Mitigation Rule also provides the following guidance at 33 CFR 332.3(l)(1) *Party responsible for compensatory mitigation*. *"For permittee-responsible mitigation, the special conditions of the DA permit must clearly indicate the party or parties responsible for the implementation, performance, and longterm management of the compensatory mitigation project."* To mitigate for the vegetative conversion of 337 acres of tidal freshwater wetland, the Corps proposes to acquire 2,683 acres of land identified in the SNWR's Comprehensive Conservation Plan. Once acquired, the land would be provided to the USFWS to manage as additions to the SNWR. As part of the SNWR, the lands would be subject to the same protections and use requirements as defined in National Wildlife Refuge System Improvement Act of 1997 (Improvement Act). As defined in the SNWR's Comprehensive Conservation Plan,

"All programs and uses must be evaluated based on mandates set forth in the Improvement Act. Those mandates are to:

- *Contribute to ecosystem goals, as well as refuge purposes and goals;*
- *Conserve, manage, and restore fish, wildlife, and plant resources and their habitats;*
- *Monitor the trends of fish, wildlife, and plants;*
- *Manage and ensure appropriate visitor uses as those uses benefit the conservation of fish and wildlife resources and contribute to the enjoyment of the public; and*
- *Ensure that visitor activities are compatible with refuge purposes.*

The Improvement Act further identifies six priority wildlife-dependent recreational uses. These uses are: hunting, fishing, wildlife observation, wildlife photography, and environmental education and interpretation. As priority public uses of the Refuge System, they receive priority consideration over other public uses in planning and management.

The Improvement Act directs the Service to ensure that the biological integrity, diversity, and environmental health of the Refuge System are maintained for the benefit of present and future generations of Americans. The policy is an additional directive for refuge managers to follow while achieving refuge purpose(s) and the Refuge System mission. It provides for the consideration and protection of the broad spectrum of fish, wildlife, and habitat resources found

on refuges and associated ecosystems. When evaluating the appropriate management direction for refuges, refuge managers will use sound professional judgment to determine their refuges' contribution to biological integrity, diversity, and environmental health at multiple landscape scales. Sound professional judgment incorporates field experience, knowledge of refuge resources, refuge role within an ecosystem, applicable laws, and best available science, including consultation with others both inside and outside the Service."

The Refuge has the authority to accept these lands, since the lands are already included in the Refuge's approved Acquisition Plan. The USFWS would manage these properties using funds obtained through the Department of Interior's normal budget process. Based on the information provided, the USACE has determined that the protective measures that would be afforded by the USFWS for the 2,683 acres of bottomland hardwoods and upland adequately satisfy the requirement of identifying the responsible party and defining implementation, performance and long-term management of the compensatory mitigation project.

1.7 Evaluation of Permittee-Responsible Mitigation and Timing

The Final Mitigation Rule provides the following guidance at 33 CFR 332.3(m) *Timing which states, "Implementation of the compensatory mitigation project shall be, to the maximum extent practicable, in advance of or concurrent with the activity causing the authorized impacts. The district engineer shall require, to the extent appropriate and practicable, additional compensatory mitigation to offset temporal losses of aquatic functions that will result from the permitted activity."* As illustrated in Section VIII titled, "Timing of Construction" of Appendix C- Mitigation Planning, all of the properties comprising the 2,683 acres of preservation mitigation would be acquired during the harbor deepening. Thus, the required mitigation would be provided prior to or concurrent with the activity that results in the conversion of wetland.

1.8 Evaluation of Permittee-Responsible Mitigation and Financial Assurances

The Final Mitigation Rule provides the following guidance at 33 CFR 332.3(n) *Financial Assurances, "The district engineer shall require sufficient financial assurances to ensure a high level of confidence that the compensatory mitigation project will be successfully completed, in accordance with applicable performance standards. In cases where an alternate mechanisms available to ensure a high level of confidence that the compensatory mitigation will be provided and maintained (e.g., a formal, documented commitment from a government agency or public authority) the district engineer may determine that financial assurances are not necessary for that compensatory mitigation project."*

The 2008 Final Mitigation Rule is now commonly applied in the USACE's Regulatory Program. The Rule was used as the principal document for updating the USACE's mitigation banking program in the State of Georgia. Both commercial and county- managed mitigation banks exist within the state. Financial assurances are required for commercial, private-based mitigation banks where the responsible party (i.e., banker) could abandon a mitigation bank before it achieves success.

However, the Georgia IRT has not required county-owned mitigation banks, which use bank credits exclusively for the purpose of mitigating public projects (i.e., road improvement, utility lines, etc.) to provide financial assurances. Similarly, the Georgia Department of Transportation (state agency) is not required to provide financial assurances for its mitigation banks. The reason for this difference in policy is based on 33 CFR 332.3 (n)(1) of the Final Mitigation Rule and the fact that government entities are neither transient nor fleeting.

Like the Georgia Department of Transportation, the Federal government is neither transient nor fleeting, so requiring financial assurances for successfully completing and maintaining the proposed mitigation is not warranted.

The need for Financial Assurances, as defined in the 2008 Final Mitigation Rule, and its application toward civil works projects like the SHEP is not justified. Regulation 33 CFR 332.3 (n)(1) of the 2008 Final Mitigation Rule states *"In cases where an alternate mechanism is available to ensure a high level of confidence that the compensatory mitigation will be provided and maintained (e.g., a formal, documented commitment from a government agency or public authority) the district engineer may determine that financial assurances are not necessary for that compensatory mitigation project."* The SHEP is a civil works project that will receive funding from Congress and the State of Georgia (through the Georgia Department of Transportation). The mitigation will be implemented prior to or concurrent with the construction that causes the adverse impacts. Congress would provide funds over a period of years to work on the project. No distinction will be made in those funds between construction and mitigation funds. The Corps treats mitigation as an integral component of the total project, so it would implement the mitigation at the same time as it does the other physical construction. The EIS contains a figure that shows the timing that Savannah District expects to perform the dredging and the mitigation. Maintenance of the mitigation would be a responsibility of the Federal Government. The USFWS would maintain the lands that are added to the Refuge. Savannah District would maintain the other mitigation features. The Corps places its highest budget priority on performance of required mitigation so that its civil works projects remain in compliance with their NEPA commitments and clearances.

1.10 Evaluation of Permittee-Responsible Mitigation and Ecological Performance Standards

The Final Mitigation Rule provides the following guidance at 33 CFR 332.5(a) *Ecological Performance Standards*, *"The approved mitigation plan must contain performance standards that will be used to assess whether the project is achieving its objectives. Performance standards should relate to the objectives of the compensatory mitigation project, so that the project can be objectively evaluated to determine if it is developing into the desired resource type, providing the expected functions, and attaining any other applicable metrics (e.g., acres)."* The project's secondary impacts to tidal freshwater and saltmarsh would be mitigated through the preservation of 2,683 acres of bottomland hardwood wetland and upland adjacent to the SNWR. As such, there would be no need to establish ecological performance standards for the preservation mitigation sites.

1.11 Evaluation of Permittee-Responsible Mitigation and Monitoring

The Final Mitigation Rule provides the following guidance at 33 CFR 332.6(a)(1) *Monitoring*, “Monitoring the compensatory mitigation project site is necessary to determine if the project is meeting its performance standards, and to determine if measures are necessary to ensure that the compensatory mitigation project is accomplishing its objectives. The submission of monitoring reports to assess the development and condition of the compensatory mitigation project is required, but the content and level of detail for those monitoring reports must be commensurate with the scale and scope of the compensatory mitigation project, as well as the compensatory mitigation project type. The mitigation plan must address the monitoring requirements for the compensatory mitigation project, including the parameters to be monitored, the length of the monitoring period, the party responsible for conducting the monitoring, the frequency for submitting monitoring reports to the district engineer, and the party responsible for submitting those monitoring reports to the district engineer.” The project’s secondary impacts to tidal freshwater marsh and saltmarsh will be mitigated through the preservation of 2,683 acres of bottomland hardwood wetland and upland adjacent to the SNWR. As such, there would be no need to establish monitoring protocols for the mitigation preservation sites. However, the unique nature of the impact (i.e., vegetative conversion) does warrant monitoring to ascertain the magnitude of marsh conversion that does occur. To that end, the USACE has developed a monitoring plan (Please see Appendix D of the EIS for specifics). Figure 65 illustrates the existing 0.5 ppt salinity contour within the harbor (blue line). The pink line indicates the 0.5 ppt salinity contour with the 48-ft deepening and implementation of Flow Diversion Plan 6A (Please see Appendix C-Mitigation Plan for a full description of the proposed impacts and the associated mitigation plan).

In brief, the USACE will establish 12 monitoring sites in these transitional areas that are predicted to most likely experience a vegetative shift as a result of the SHEP (Figure 65). Seven of those sites have already been established and have been monitored in a 2000/2001 characterization by the USGS Florida Fish and Wildlife Cooperative Research Unit. The five new monitoring locations (two triangles represent most recent additions) were chosen to expand monitoring in highly sensitive marshes, in other areas of marsh where significant salinity changes are possible under a variety of scenarios, and to monitor community shifts both vertically (up and down river) and laterally (interior vs. exterior). One of the upriver sites and downriver sites would be used as a freshwater marsh and brackish marsh reference site, respectively. These data, coupled with the modeling results, would be used to quantifying indirect impacts to freshwater and saltmarsh. These areas will again be studied for 1 year as part of the pre-construction phase of the project. Monitoring of marsh vegetation will also occur during the 3-6 year period of construction and for an additional 7-year post-construction period. For this period of time (i.e., pre-, post-, and construction phases of the project) the marsh sites will be characterized with respect to vegetation composition and compared to the reference marsh site. Tidal sample stations installed at these marsh sites would also record water surface elevation, specific conductance of surface waters that flood the marsh, specific conductance of waters in the root zone, and water depth every 30 minutes. Measurement of specific conductance would allow one to calculate the salinity values. The recorded data would be downloaded monthly. The marsh transects would be sampled twice annually (June and October), following sampling protocols described in Kitchens (2003) and generally those

performed when the USGS monitored in 2000/2001. The project would fund the USGS Florida Fish and Wildlife Cooperative Research Unit (or a similarly qualified organization) to perform this work. The USGS Cooperative Research Unit would prepare and provide annual reports of their findings to the Interagency Coordination Team (ICT) for review. In turn, the ICT would

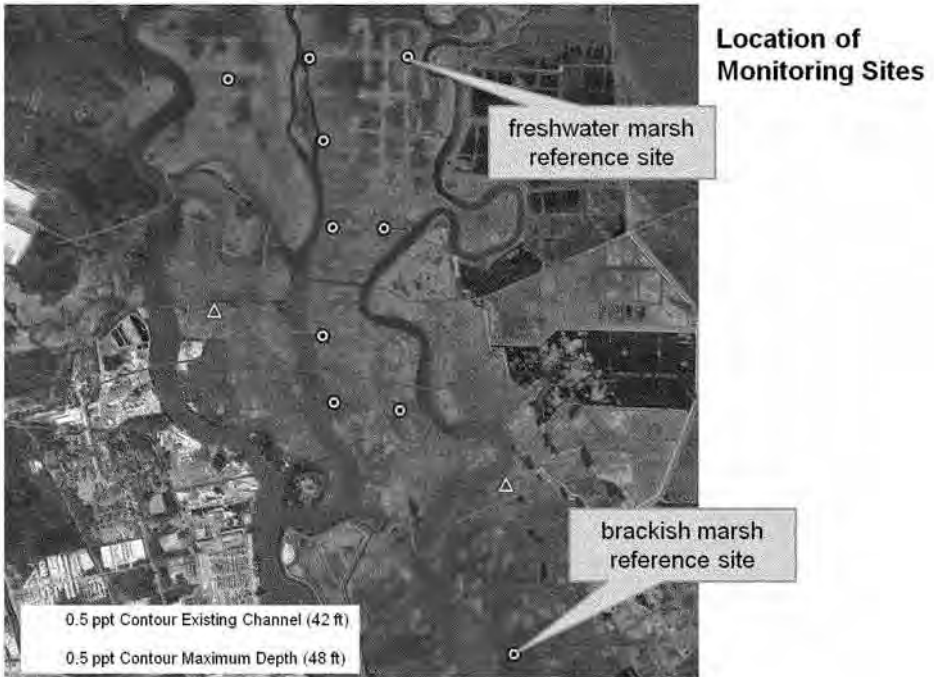


Figure 65

meet on an annual basis to discuss the result of those findings. The USACE believes this level of monitoring is acceptable and commensurate with the scale and scope of the anticipated impact.

1.12 Evaluation of Permittee-Responsible Mitigation and Site Protection

The Final Mitigation Rule provides the following guidance at 33 CFR 332.7(a)(1) *Site Protection*: “The aquatic habitats, riparian areas, buffers, and uplands that comprise the overall compensatory mitigation project must be provided long-term protection through real estate instruments or other available mechanisms, as appropriate. Long-term protection may be provided through real estate instruments such as conservation easements held by entities such as federal, tribal, state, or local resource agencies, non-profit conservation organizations, or private land managers; the transfer of title to such entities; or by restrictive covenants. For

government property, long-term protection may be provided through federal facility management plans or integrated natural resources management plans." To mitigate for the vegetative conversion of tidal wetlands, the Corps proposes to acquire 2,683 acres of land identified as ecologically valuable in the SNWR's Comprehensive Conservation Plan. Once acquired, the land would be provided to the USFWS to manage as additions to the SNWR. As part of the SNWR, the lands would be subject to the same protections and use requirements as defined in National Wildlife Refuge System Improvement Act of 1997 (Improvement Act).

1.13 Evaluation of Permittee-Responsible Mitigation and Sustainability

The Final Mitigation Rule provides the following guidance at 33 CFR 332.7(b)(1) *Sustainability* "Compensatory mitigation projects shall be designed, to the maximum extent practicable, to be self-sustaining once performance standards have been achieved." The conversion of tidal wetlands will be mitigated through the preservation of 2,683 acres of bottomland hardwood wetland and upland adjacent to the SNWR. Once acquired by the USACE, the land would be provided to the USFWS to manage as additions to the SNWR. As part of the SNWR, the lands would be subject to the same protections and use requirements as defined in National Wildlife Refuge System Improvement Act of 1997 (Improvement Act). The USACE has determined that integration of these preserved lands into the SNWR is a self-sustaining form of mitigation.

1.14 Evaluation of Permittee-Responsible Mitigation and Adaptive Management

The Final Mitigation Rule provides the following guidance at 33 CFR 332.7(c)(2-3) *Adaptive Management* "If monitoring or other information indicates that the compensatory mitigation project is not progressing towards meeting its performance standards as anticipated, the responsible party must notify the district engineer as soon as possible. The district engineer will evaluate and pursue measures to address deficiencies in the compensatory mitigation project. The district engineer will consider whether the compensatory mitigation project is comparable to the original objectives of the compensatory mitigation project. (3) The district engineer, in consultation with the responsible party (and other federal, tribal, state, and local agencies, as appropriate), will determine the appropriate measures. The measures may include site modifications, design changes, revisions to maintenance requirements, and revised monitoring requirements. The measures must be designed to ensure that the modified compensatory mitigation project provides aquatic resource functions comparable to those described in the mitigation plan objectives." The conversion of tidal wetlands will be mitigated through the preservation of 2,683 acres of bottomland hardwood wetland and upland adjacent to the SNWR. As such, there would be no concern with performance standards and/or deficiencies on the actual preservation mitigation sites. However, the unique nature of the project impacts (i.e., vegetative conversion) does warrant an adaptive management plan should *in situ* monitoring of the impact site conclude additional tidal, freshwater acreage has converted to brackish marsh.

It is important to note that the FEIS describes the rationale behind selection of the EFDC model in Section 5.1.2.1 of the FEIS (Pages 5-8-5-13). In brief, a comparison of models illustrated that wetland impacts identified by using the EFDC hydrodynamic model are higher (i.e., greater quantity) than those identified by the Marsh Succession Model at all proposed project depths.

This indicates that the Corps' use of the EFDC-derived impacts is a more inclusive and conservative estimate of the impacts that could occur. That is, the EFDC model is more likely to capture more impacts than other models that are presently available.

Also, the salinity value that USACE used to define a shift from freshwater to brackish marsh (i.e., 0.5 ppt) is approximately 5 times lower than what has traditionally been observed with 100% vegetative shifts *in situ* within the Lower Savannah Watershed (Latham et al., 1994) and other coastal marsh systems in the southeastern United States (NOAA, 2010). Thus, many of the existing freshwater emergent plant species, and associated ecological parameters, will likely be sustained in areas predicted to experience salinity concentrations in the range of 2.5 ppt. For those areas that do transition to more brackish characteristics, they would still continue to provide the traditional ecological functions associated with all emergent wetland systems (please see functional assessment response).

To ensure the indirect impacts are well characterized, the USACE has also adopted a seven year, post-construction monitoring plan to evaluate and quantify the degree of wetland conversion that occurs. In its Adaptive Management Program, the USACE also proposed acquisition preservation of up to an additional five percent of wetlands if monitoring demonstrates that wetland impacts are under predicted. The USACE is satisfied that the proposed Adaptive Management plan is sufficient at this time. If monitoring results indicate additional mitigation is required, then the USACE shall coordinate with the ICT to develop an appropriate course of action.

1.15 Evaluation of Permittee-Responsible Mitigation and Long-Term Management

The Final Mitigation Rule provides the following guidance at 33 CFR 332.7(d)(1), *Long-term management*, "*The permit conditions or instrument must identify the party responsible for ownership and all long-term management of the compensatory mitigation project. The permit conditions or instrument may contain provisions allowing the permittee or sponsor to transfer the long-term management responsibilities of the compensatory mitigation project site to a land stewardship entity, such as a public agency, non-governmental organization, or private land manager, after review and approval by the district engineer. The land stewardship entity need not be identified in the original permit or instrument, as long as the future transfer of long-term management responsibility is approved by the district engineer.*" To mitigate for the vegetative conversion of tidal wetlands, the Corps proposes to acquire 2,683 acres of land identified in the SNWR's Comprehensive Conservation Plan as being ecologically valuable. Once acquired, the land would be provided to the USFWS to manage as additions to the SNWR. As part of the SNWR, the lands would be subject to the same protections and use requirements as defined in National Wildlife Refuge System Improvement Act of 1997 (Improvement Act). Thus, the USACE has concluded that no additional long-term management requirements are necessary for the preserved land.

2.0 Identification and Justification of Wetland Mitigation for Direct Impacts

As defined in the Functional Assessment section of this analysis, deepening the harbor to a 48-foot depth would result in direct impacts (i.e., excavation) to 15.68 acres of brackish marsh. It should be noted that these impacts would result after all possible avoidance and minimization measures have been used. In brief, these marsh areas are subject to periodic flooding as a result of daily tides and the vegetative communities in these areas generally consist of one plant species, which is a smooth cordgrass known as *Spartina alterniflora*. Approximately 7.3 acres (47%) of the total saltmarsh acreage that would be excavated is subject to the wave action of passing ships and the resulting perturbation. Thus, these areas exhibit vegetation densities which are significantly less than what is typically observed in a pristine marsh. Patches of bare, coarse-grain sand and mudflat are integrated throughout the patches of *Spartina alterniflora* in these locations. Given the sparse presence of vegetation, it would appear that these areas are challenged, somewhat degraded, and do not possess the same degree of primary productivity as observed in robust, densely-vegetated, brackish marsh systems located throughout coastal Georgia. Figure 66 illustrates the location and acreage of brackish marsh that will be excavated as a result of the SHEP.

With respect to the Lower Savannah River Watershed, data obtained from the University of Georgia's Natural Resources Spatial Analysis Lab (NARSAL) reports that approximately 2,235 acres of non-forested wetland (salt) or saltmarsh was present in the Lower Savannah River Watershed. Based on the 2005 estimate, excavation of 15.68 acres of saltmarsh in the watershed would result in the loss of approximately 0.7% in saltmarsh acreage. However, the following sections of this analysis illustrate how the proposed mitigation will result in no net loss of saltmarsh as a result of the direct impacts.

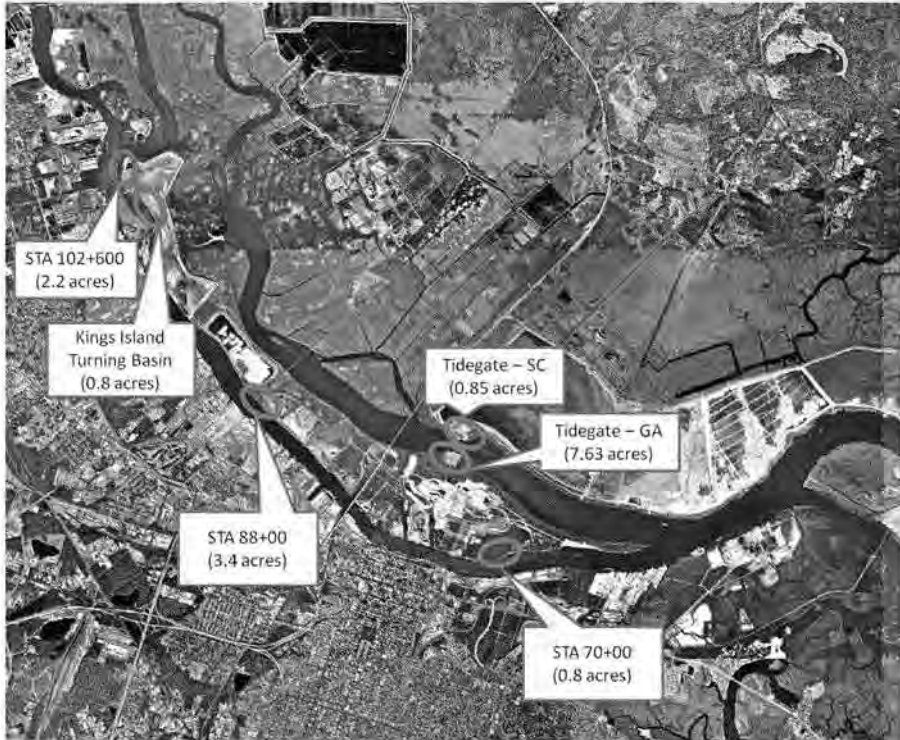


Figure 66. Location of direct impacts to brackish marsh within the Savannah Harbor

2.1 Evaluation of Mitigation Bank Credits

The USACE evaluated the Regional Internet Banking Information and Tracking System (RIBITS) for potential mitigation banks that possess saltmarsh mitigation credits within the Lower Savannah River Watershed. As of March 2011, no commercial saltmarsh mitigation banks were authorized within the Lower Savannah River Watershed. Other coastal watersheds immediately adjacent to the Lower Savannah were also evaluated. Again, no saltmarsh mitigation banks are currently authorized in the Ogeechee-Coastal Watershed (HUC 03060204) or the Broad-St Helena Watershed (HUC 03050208). The Savannah District, Regulatory Division is currently tracking three pending saltmarsh banks, and the Charleston District is currently tracking one (Please see following table). Thus, at this time mitigation banks with “in kind” saltmarsh mitigation do not exist within the Lower Savannah Watershed or adjacent watersheds.

Pending Saltmarsh Mitigation Banks

Bank Name	Watershed	Acreage of Bank*	Status	District
Salt Creek	Ogeechee-Coastal	98.9	Pending	Savannah
Tronox	Lower Savannah	88	Pending	Savannah
Vallambrosa	Ogeechee-Coastal	1,513	Pending	Savannah
Clydesdale Club	Lower Savannah	693	Pending	Charleston

* Acreage reflects total size of bank and may include additional habitat other than saltmarsh.

2.2 Evaluation of In Lieu Fee Program Credits

As of March 2011, the In-Lieu Fee Program in the State of Georgia has not been approved by the USACE and Regulatory Interagency Review Team (IRT) to provide compensatory mitigation credits that would offset impacts to aquatic resources. At this time, the USACE, Regulatory Division is working with interested parties and the Georgia Land Trust Service Center to update the program.

2.3 Evaluation of Permittee-Responsible Mitigation under a Watershed Approach

As identified in Section 2.1 of this analysis, there are presently no salt marsh mitigation banks that could compensate for the loss of 15.68 acres of brackish marsh that will be directly impacted as a result of widening three bends in the channel, enlarging the Kings Island Turning Basin, and removing the Tidegate. Likewise, the In-lieu fee program is not presently structured to provide the necessary mitigation for the previously identified direct impacts to brackish marsh. The Georgia DNR Environmental Protection Division (Ga DNR-EPD) developed the 2001 Savannah River Basin Management Plan, *"to provide relevant information on the Savannah River basin characteristics, describe the status of water quality and quantity in the Savannah River basin, identify present and future water resource demands, present and facilitate the implementation of water protection efforts, and enhance stakeholder understanding and involvement in basin planning."* Per guidance provided at 33 CFR 332.3(c)(1) of the Final Mitigation Rule, *"Where a watershed plan is available, the district engineer will determine whether the plan is appropriate for use in the watershed approach for compensatory mitigation."* A detailed assessment of Ga DNR-EPD's 2001 Management Plan is provided in Section D 1.3. As with the previous analysis of this plan, two long-term priorities "(1) *Preserving habitat suitable for the support of healthy aquatic and riparian ecosystems, and (2) Protecting water quality in lakes, rivers, streams, estuaries and coastal waters through attainment of water quality standards and support for designated uses,*" are of interest with respect to providing suitable mitigation for the 15.68 acres of unavoidable impacts to brackish marsh.

Presently, almost 50% of the brackish marsh acreage that will be excavated is subject to the wave action of passing ships and the resulting perturbation. These areas exhibit vegetation densities which are significantly less than what is typically observed in a pristine marsh. Patches of bare, coarse-grain sand and mudflat are integrated throughout the patches of *Spartina*

alterniflora in these locations. Given the sparse presence of vegetation, it would appear that these areas are challenged, somewhat degraded, and do not possess the same degree of primary productivity as observed in robust, densely-vegetated, saltmarsh systems located throughout coastal Georgia. Obviously, it will be important that any of the identified mitigation options compensates for loss of excavated brackish marsh, but there is a strong likelihood that a watershed assessment for the Lower Savannah River Watershed could identify "In kind/In basin" mitigation sites that actually allow for greater marsh productivity levels than the areas subject to direct impacts. Achieving this goal will support the two, long-term objectives of Ga DNR-EPD's 2001 Mitigation Plan that were previously stated.

When evaluating possible mitigation options, USACE also reflected on the guidance identified as *Considerations*, which is defined at 33 CFR 332.2(c)(2) i-v of the Final Mitigation Rule. With respect to the Lower Savannah River Watershed, the following facts were considered with respect to regulations i-v when developing a mitigation plan for the excavation of 15.68 acres of brackish marsh:

- The unavoidable excavation of 15.68 acres of brackish marsh will occur as a result of the harbor deepening project within the Lower Savannah Watershed (HUC 03060109). Excavation results in a complete loss of all wetland function (Please see following table). Therefore, the best method for replacing all of the lost functions (or suite of functions) and ensuring "no net loss of aquatic resources" is to restore (or reestablish) a suitable brackish marsh ecosystem.

Changes in Wetland Function as a Result of Brackish Marsh Excavation

Elements of Wetland Function	Effect of Excavation on Wetland Function (15.68 acres)
Water Purification	Major Adverse (lost)
Flood Protection	Major Adverse (lost)
Shoreline Stabilization	Major Adverse (lost)
Groundwater Recharge	Major Adverse (lost)
Streamflow Maintenance	Major Adverse (lost)
Retention of Particles	Major Adverse (lost)
Surface Water Storage	Major Adverse (lost)
Subsurface Storage	Major Adverse (lost)
Nutrient Cycling	Major Adverse (lost)
Values to Society	Major Adverse (lost)
Fish and Wildlife Habitat	Major Adverse (lost)

Major Effect – the effect on the resource is substantial, noticeable, and permanent. The action severely changes one or more characteristics of the resource.

Adverse: the action is contrary to the interest or welfare of the resource; a harmful or unfavorable result.

- Results of the previous USACE watershed assessment, which are reported in earlier sections of this analysis (Section D 1.3 through 1.4), have merit when considering opportunities and threats for the mitigation of brackish marsh in the Lower Savannah River Watershed. Those results included inventories of historic and existing aquatic resources, identification of degraded aquatic resources, and identification of immediate and long-term needs with the watershed.
- Current and future-anticipated salinity concentrations that are observed upstream of the most active, industrialized areas of the harbor will support long-term reestablishment of brackish marsh.
- Approximately 7.3 of the 15.68 acres of brackish marsh that will be excavated occur in the most active areas of the Savannah Harbor. These areas are prone to disturbances caused by passing vessels as well as the overall maintenance needs of the harbor. These areas exhibit vegetation densities which are significantly less than what is typically observed in a pristine marsh. Patches of bare, coarse-grain sand and mudflat are integrated throughout the patches of *Spartina alterniflora* in these locations. Given the sparse presence of vegetation, it would appear that these areas are challenged, somewhat degraded, and do not possess the same degree of primary productivity as observed in robust, densely-vegetated, saltmarsh systems located throughout coastal Georgia.
- Given the ongoing perturbation within the area of the harbor with greatest vessel traffic and associated support activities, the search for “in kind/in basin” mitigation in the Lower Savannah River Watershed has focused on areas that are removed from these stressors.
- The Savannah National Wildlife Refuge (SNWR) is a conservation area of national importance with habitats that are important to many unique plant and animal species, including threatened and endangered species. It is located in the vicinity of the SHEP project (i.e., “In basin”).

When evaluating possible mitigation options for impacts to brackish marsh, USACE reflected on the guidance identified as *Information Needs*, which is defined at 33 CFR 332.3 (c)(3) i-iii of the Final Mitigation Rule. The following facts are presented in compliance with regulations i-iii that was previously cited.

- Information concerning watershed conditions and needs has already been provided in Section D 1.3 of this analysis.
- Development activities, current developments, the presence and needs of sensitive species have already been provided in Section D 1.3 – 1.4 of this analysis.
- Figure 61 illustrates the Savannah Harbor, the Federal Navigation Channel, and the upstream limits of the SHEP. The identification of an in kind/in basin mitigation site requires that the location be outside the primary “zone of influence” of large container vessels. This zone of influence would hinder success of a brackish marsh compensatory mitigation project. As indicated in previous sections, approximately 7.3 acres of brackish

marsh proposed for impact is subject to the wave action of passing ships and the resulting perturbation (Figure 67). Thus, avoiding areas of increased wave action and hydrodynamic intensity will promote long-term, sustainable mitigation. Additionally, Figure 67 illustrates the boundaries of the SNWR. The USACE has detailed all of the advantageous (location, size, habitat quality and connectivity, wildlife and aquatic resources diversity, protections, etc.) that make the SNWR a priority in terms of sustainable ecosystems within the Lower Savannah River Watershed (See Section D 1.3-1.4). Therefore, identifying a degraded site within the boundaries of the SNWR that could be restored would favor the long-term success, health and productivity of a brackish marsh mitigation project.

When evaluating possible mitigation options, USACE also satisfied criteria for evaluating mitigation options as reflected in the determination of a *Watershed Scale*, which is defined at 33 CFR 332.3 (c)(4). For purposes of our analysis, we established the Lower Savannah River Watershed as the appropriate scale to assess impacts and mitigation opportunities. The Lower Savannah River Watershed is also defined by the 8-digit Hydrologic Unit Code (HUC) 03060109. Characteristic of this watershed maybe found in previous sections of this analysis (Section D 1.3 – 1.4). The selection of this watershed scale is supported by the historical review of projects requiring USACE permits and the associated cumulative impacts analysis that considers past, present and reasonably foreseeable future impacts within the same 8-digit HUC. Additionally, most state and Federal resource agencies have used a watershed approach that has typically been scoped using an 8-digit hydrologic unit code (NRCS, 1997). Additionally, the identification of potential brackish marsh mitigation sites was further constrained by the availability of salinity concentrations necessary to support the function and integrity of such sites. Information presented in the *Considerations* and *Information Needs* sections was also important when evaluating brackish marsh mitigation options within the Lower Savannah River Watershed.



Figure 67. Location of Restored Brackish Marsh in Lower Savannah River Watershed

2.4 Evaluation of Site Selection for Permittee-Responsible Mitigation

When evaluating possible mitigation options, USACE also satisfied criteria for evaluating mitigation options as reflected in the determination of *Site Selection*, which is defined at 33 CFR 332.3 (d)(1-3) of the Final Mitigation Rule. The following facts are presented in compliance with regulations 1-3 that were previously cited.

- Figure 67 illustrates the proposed brackish marsh mitigation site. This site was operated as Disposal Area 1S that for many years to place dredged maintenance sediments from the upstream reaches of the Savannah Harbor.

- Disposal Area (DA) 1S was used for the disposal of maintenance sediments collected from approximately STA 110+000 to 100+000. Historical records indicate that the composition of the dredged sediment consisted of approximately 67% sand (#230 sieve), 14% silt, and 9% clay. The high percentage of sand reduces the potential that contaminants would reside in the legacy dredged sediments. (Note: Prior to the start of any restoration activity, the site would be sampled and evaluated for the possibility of contaminants located within sediments proposed for removal. Results of those tests would be shared with the Wetland Interagency Coordination Team).
- Prior to its use as a Disposal Area, the site existed as a brackish marsh and had continuity with other marsh located immediately adjacent and east of the site's footprint (Figure 61). This abutting marsh area is dominated by *Spartina alterniflora* with *Spartina cynosuroides* located in areas that are relatively higher in elevation and distance from the tidally influenced surface water.
- The vicinity of Disposal Area (DA) 1S is subject to the flood and ebb of the tide. The salinity in this reach of the harbor can vary between 7 and 15ppt. Following harbor deepening, the resulting salinity will still be capable of supporting a brackish marsh ecosystem at this site.
- DA 1S is located within the designated boundaries of the SNWR (Figure 67). As such, it is provided the same protections as other areas that comprise the Refuge. The 42-acre restored marsh would abut approximately 44 acres of existing brackish marsh that is also located in the SNWR. When completed, the continuity of the restored marsh, coupled with the 44 acres of abutting marsh, will result in an expanded and improved estuarine ecosystem. Thus, the proposed restoration will be compatible with adjacent land uses and the plans/goals of the SNWR as defined in their Comprehensive Conservation Plan.
- The proposed mitigation site is north of the Federal Navigation Channel. The design includes retention of protective high ground and trees along the east side of the restored marsh. Retention of the berm feature with protective trees would result in a site that is outside the primary "zone of influence" of large container vessels, thereby avoiding areas of increased wave action and hydrodynamic intensity within the harbor. This berm feature would provide additional protection for the graded marsh area during the plant recruitment phase and growth of juvenile plant *Spartina* plants.

2.5 Evaluation of Permittee-Responsible Mitigation with Respect to Mitigation Type and Amount

When evaluating possible mitigation options, USACE also satisfied criteria for evaluating mitigation options as reflected in the determination of *Mitigation Type and Amount of Compensatory Mitigation*, which is defined at 33 CFR 332.3 (e-f) of the Final Mitigation Rule. The following facts are presented in compliance with regulations e-f that were previously cited.

- 33 CFR 332.3 (e)(1) states the following, *"In general, in kind mitigation is preferable to out-of-kind mitigation because it is most likely to compensate for the functions and services lost at the impact site. For example, tidal wetland compensatory mitigation projects are most likely to compensate for unavoidable impacts to tidal wetlands, while perennial stream compensatory mitigation projects are most likely to compensate for unavoidable impacts to perennial streams. Thus, except as provided in paragraph (e)(2) of this section, the required compensatory mitigation shall be of a similar type to the affected aquatic resource."* The proposed restoration of 42-acres of brackish marsh would be considered "in kind" mitigation. Furthermore, the location of the mitigation site is within the Lower Savannah River Watershed. For the reasons previously identified in other sections of this evaluation, the restoration of the Disposal Site 1S site would also constitute "in basin" mitigation as well.
- 33 CFR 332.3 (f)(1) states the following, *"If the district engineer determines that compensatory mitigation is necessary to offset unavoidable impacts to aquatic resources, the amount of required compensatory mitigation must be, to the extent practicable, sufficient to replace lost aquatic resource functions. In cases where appropriate functional or condition assessment methods or other suitable metrics are available, these methods should be used where practicable to determine how much compensatory mitigation is required. If a functional or condition assessment or other suitable metric is not used, a minimum one-to-one acreage or linear foot compensation ratio must be used."* The USACE used the Regulatory SOP to determine the exact number of acres that would be required for restoration (See Appendix A at the end of the Mitigation Appendix). Historically, the Savannah District Regulatory Division and members of the Interagency Review Team (IRT), which includes USEPA, USFWS, NMFS, and GADNR representatives, have authorized the creation of saltmarsh as mitigation to offset permitted projects, which authorize impacts and or loss of saltmarsh. Data obtained from the Savannah District Regulatory Division identified 5 projects in Chatham County (which is located in the Lower Savannah Watershed), where saltmarsh was impacted, and the creation of saltmarsh was approved as mitigation typically on a ratio of 2 acres created to 1 acre impacted ratio (or less) (Please see the following table).

Projects impacting Saltmarsh and the Associated Brackish March Mitigation

Project Name	USACE File Number	Brackish Marsh Impacts (Acres)	Brackish Marsh Creation (Acres)
Slip One- Hutchinson Island	200501453	0.28	0.56
Hardin Canal Drainage	200600393	0.27	0.54
Skidaway Narrows Emergency Access	200600909	0.56	0.56
Skidaway Road Drainage Improvements	200601249	0.52	0.75
SLNG-Slip Construction	200200640	3.24	7.5

The proposed restoration of 28.75 acres of brackish marsh as mitigation for impacts to 15.68 acres would be a ratio of 1.8:1 (acres restored to acres impacted). The ratio derived

for the SHEP project provides roughly the same mitigation as other authorized projects that impacted brackish marsh. Savannah District used the SOP, ensuring that the amount of proposed mitigation would be appropriate given the area of marsh impact and the currently associated function/integrity. The natural resource agencies approved of the District's SOP calculations in the Fish and Wildlife Coordination Act Report. In support of site-specific mitigation, it is important to note that the 42 acres of contiguous, restored saltmarsh, which includes development of tidal creeks, will have more ecological value than 47% of marsh proposed for impact (i.e., 7.3 acres of marsh proposed for impact is degraded, poorly functioning saltmarsh along the navigation channel). Furthermore, the proposed mitigation site is north of the Federal Navigation Channel that would be operated at the 48-foot depth. Thus, the large, non-segmented size of the mitigation area, coupled with its "in basin" location and incorporation of a strip of trees to separate the restoration site from the harbor, makes it an ideal mitigation option for replacing the brackish marsh acreage that would be impacted.

The Savannah District SOP has been used, and will continue to be used, to evaluate Regulatory Division permit applications with wetland impacts that are greater than 10 acres. The USACE can document 15 permitted projects in the last 5 years with authorized wetland impacts greater than 10 acres (Please see following table).

Projects with Impacts Greater than 10 acres that Used SOP Calculations to Determine Mitigation Requirements.

Project Name	USACE File Number	Wetland Impacts (Acres)
Northport/Oak Grove Plantation	200414950	33.2
Broadhurst Landfill	200501435	96.55
GDOT US441 / SR 89	200600828	64.04
Houston American Cement	200700577	21.21
Newton Tract	200701309	31.86
Robins Air Force Base	200701096	19.5
Fort Benning 69741	200900567	15.94
Fort Benning 69668	200900568	12.33
The Carter Group	200801428	11.3
GDOT I-95 Widening	200502310	14.47
Grady County	200500967	129.0
Fort Stewart	200900886	26.7
Fort Stewart Machine Gun Range	200900786	103.34
Fort Stewart Multipurpose Range	200901852	202.9
Fort Stewart Digital Multipurpose Range	200900885	43.6

For these projects, the SOP was used as the best available tool to quantify credits required for impacts to wetlands. With many of these projects, the SOP was also used to determine the credits generated in association with permittee-responsible mitigation (i.e., restoration, enhancement and preservation), if applicable. In every case where impacts were greater than 10 acres, the SOP was used as an assessment tool to ensure the credits required for mitigation were practicable given the magnitude of impact associated with the authorized project.

It is important to note that the SOP is a tool for calculating mitigation, but the Regulatory Division also uses sound, science-based judgment when evaluating an applicant's project that would impact Waters of the US. As defined in the USACE's General Regulatory Policies, 33 CFR 320.4 (r)(2) states, *"All compensatory mitigation will be for significant resource losses which are specifically identifiable, reasonably likely to occur, and of importance to the human or aquatic environment. Also, all mitigation will be directly related to the impacts of the proposal, appropriate to the scope and degree of those impacts, and reasonably enforceable."* To that end, Savannah District always ensures that calculated mitigation credits derived from the SOP pass the sensibility test and are consistent with actual, project-derived impacts.

It should be noted that Savannah District is working to develop an updated Regulatory Mitigation SOP that is based on a functional assessment. However, to date that tool is still being developed, and therefore, is unavailable for use at this time. Regulatory Division will continue to use the current SOP as a tool for assessing mitigation requirements for all projects (including projects with impacts greater than 10 acres) until such time that the updated Mitigation SOP has been completed, tested and validated.

2.6 Evaluation of Permittee-Responsible Mitigation and Preservation

When evaluating possible mitigation options, USACE also satisfied criteria for evaluating mitigation options as reflected in the determination of *Preservation*, which is defined at 33 CFR 332.3 (h) of the Final Mitigation Rule. The following facts are presented in compliance with regulation h that were previously cited.

- Disposal Area (DA) 1S is located within the borders of the SNWR. However, USACE and GDOT still maintain an easement on the site that could allow for disposal and continued management of dredged material at a later date. As illustrated in Appendix A of this report, the USACE used a 0.5 value for the "Control" factor in the SOP calculation. The 0.5 value is the highest value that can be recorded for the "Control" factor. By using this control factor, USACE and GDOT will relinquish the easement that could allow for future use of Disposal Area 1S. Once the area has been restored to a functioning brackish marsh ecosystem, it will also be permanently protected through the State of Georgia's Coastal Marshlands Protection Act. Finally, the restoration area is already within the boundaries of the SNWR. The resulting marsh will be contiguous with existing marsh that abuts the restoration site. As such, the restored marsh will be

permanently integrated into the same conservation and management plan that currently protects existing brackish marsh areas within the SNWR.

- The restored brackish marsh will replace the 15.68 acres of excavated brackish marsh. When compared to the excavated sites, the location and overall area of the restored marsh will provide greater physical, chemical and biological functions within the Lower Savannah River Watershed.
- Restoration and preservation of the brackish marsh site will contribute significantly to the ecological sustainability of the Lower Savannah River Watershed.
- Preservation is an element of the “Control” factor identified in the SOP calculation. Use of the Savannah District SOP to determine a credit requirement was accepted by the Wetland ICT. The ratios of mitigation to impact (i.e., 1.8:1) is comparable with other public projects that have directly impacted brackish marsh. Therefore, use of the preservation element in the SOP calculation is appropriate and practicable.
- The Preservation element identified through use of the SOP will be fulfilled in conjunction with restoration of brackish marsh at the CDF 1S site.

2.7 Evaluation of Permittee-Responsible Mitigation and Responsible Parties

When evaluating possible mitigation options, USACE also satisfied criteria for evaluating mitigation options as reflected in the determination of *Party Responsible for Compensatory Mitigation*, which is defined at 33 CFR 332.3 (l) of the Final Mitigation Rule. The following facts are presented in compliance with regulation l that was previously cited.

- The USACE will be responsible for the implementation, performance and long-term management of the restored brackish marsh site.
- The Wetland ICT, which is comprised of representatives from USEPA, USFWS, NOAA, GA DNR-CRD, and SC DHEC-OCRM will receive biannual updates on the status of the compensatory mitigation project.

2.8 Evaluation of Permittee-Responsible Mitigation and Timing

When evaluating possible mitigation options, USACE also satisfied criteria for evaluating mitigation options as reflected in the determination of *Timing*, which is defined at 33 CFR 332.3 (m) of the Final Mitigation Rule. The following facts are presented in compliance with regulation m that was previously cited.

- 33 CFR 332.3(m) states the following, “*Implementation of the compensatory mitigation project shall be, to the maximum extent practicable, in advance of or concurrent with the activity causing the authorized impacts. The district engineer shall require, to the extent appropriate and practicable, additional compensatory mitigation to offset temporal*

losses of aquatic functions that will result from the permitted activity." USACE would restore Disposal Area 1S concurrently with dredging in the Inner Harbor (See Timing of Construction Table). This would ensure that excavation of the 15.68 acres of brackish marsh happens at the same time (possibly before depending on positioning of hydraulic dredge and dredging window) as development of the 42-acre brackish marsh system.

2.9 Evaluation of Permittee-Responsible Mitigation and Financial Assurances

The Final Mitigation Rule provides the following guidance at 33 CFR 332.3(n) *Financial Assurances*, *"The district engineer shall require sufficient financial assurances to ensure a high level of confidence that the compensatory mitigation project will be successfully completed, in accordance with applicable performance standards. In cases where an alternate mechanism is available to ensure a high level of confidence that the compensatory mitigation will be provided and maintained (e.g., a formal, documented commitment from a government agency or public authority) the district engineer may determine that financial assurances are not necessary for that compensatory mitigation project."* The need for Financial Assurances, as defined in the 2008 Final Mitigation Rule, and its application toward civil works projects like the SHEP, has not been justified. Regulation 33 CFR 332.3 (n)(1) of the 2008 Final Mitigation Rule states, *"In cases where an alternate mechanism is available to ensure a high level of confidence that the compensatory mitigation will be provided and maintained (e.g., a formal, documented commitment from a government agency or public authority) the district engineer may determine that financial assurances are not necessary for that compensatory mitigation project."* The SHEP is a civil works project that will receive funding from the Federal government. USACE will include provisions in the Record Of Decision (ROD) that specify that the mitigation features will be operated and maintained in the future. If the mitigation is not operated and maintained, the Federal Navigation Project would not be in compliance with its NEPA commitments.

Of note, the 2008 Final Mitigation Rule has significant application within the USACE's Regulatory Program. The Rule was used as the principal document for updating the USACE's mitigation banking program in the State of Georgia. Both commercial and county- managed mitigation banks exist within the state. Financial assurances are required for commercial, private-based mitigation banks where the responsible party (i.e., banker) could abandon a mitigation bank before it achieves success. However, county-owned mitigation banks, which use bank credits exclusively for the purpose of mitigating public projects (i.e., road improvement, utility lines, etc.), are not required to provide financial assurances. Likewise, the Georgia Department of Transportation (state agency) is not required to provide financial assurances for its mitigation banks. The reason for this difference in policy is based on 33 CFR 332.3 (n)(1) of the Final Mitigation Rule and the fact that government entities are neither transient nor fleeting. Similarly, the Federal government and the Georgia Department of Transportation would not be required to provide financial assurances for the same reasons.

2.10 Evaluation of Permittee-Responsible Mitigation and Ecological Performance Standards

The Final Mitigation Rule provides the following guidance at 33 CFR 332.5(a) *Ecological Performance Standards*, *"The approved mitigation plan must contain performance standards*

that will be used to assess whether the project is achieving its objectives. Performance standards should relate to the objectives of the compensatory mitigation project, so that the project can be objectively evaluated to determine if it is developing into the desired resource type, providing the expected functions, and attaining any other applicable metrics (e.g., acres)." The objective of this compensatory mitigation project is to restore the Disposal Area 1S site to a fully functional, 42-acre brackish marsh ecosystem. As a result, compensatory mitigation for the excavation of 15.68 acres of brackish marsh, which is required for the SHEP, would be satisfied, and the remaining 63.6 mitigation credits (13.25 acres) associated with the restoration effort would be held in reserve for any future USACE Civil Works actions in the Savannah Harbor. Restoration of the Disposal Area 1S site would occur by grading it down to an elevation that allows for the growth of *Spartina alterniflora* (i.e., +7.6 to +7.8 MLLW). The Corps selected that elevation range after inspection and surveying the elevations of natural marsh that is immediately adjacent to the proposed restoration site. Once the new elevations have been established, the approximately 42-acre site would be allowed to naturally vegetate. The abutting marsh, which is dominated by *Spartina alterniflora*, would provide the necessary seed stock to vegetate the restoration site. Given the prolific nature of plant, and its ability to outcompete other vegetative species within the salinity range observed in this reach of the harbor, we expect successful recruitment of the *Spartina* species with coverage of vegetation occurring at the following rate:

Revegetation Rate for Restored Marsh	
Time Period	Percent Vegetative Cover
Construction	0
Year 1	15
Year 2	25
Year 3	40
Year 4	60
Year 5	80

The density of *Spartina* plants and the resulting percent vegetative cover will be determined on an annual basis and reported to the Wetland ICT. In brief, ten 30-foot transects will be established on the restoration site. Additionally, one reference site transect will be established in the adjacent marsh. Vegetation counts and density measurements using 1 ft² quadrats will be collected along each of the transects, and all data will be compiled and reported on an annual basis. As requested by the USFWS, a "feeder" creek system would also be constructed toward the interior of the restored marsh. The creek would provide another mechanism of ensuring adequate exchange of brackish, surface water with pore waters that are located on the interior of the site.

The need for hydrology data is negligible since vegetative cover, and ultimate success of a brackish marsh system, is primarily dictated by the elevation of the marsh site in conjunction with two daily tidal cycles. Because elevation and the tides ultimately determine the health and

function of the *Spartina* plants, which will subsequently dictate the primary productivity of the marsh, USACE will not deploy instruments to measure hydrology nor propose any hydrologic indicators as a means of gauging ecological performance or success. Rather, the success of the marsh site will be determined based on the coverage of *Spartina alterniflora* as indicated by the revegetation rate depicted in the previous table. See Section 2.12 “Evaluation of Permittee-Responsible Mitigation and Adaptive Management” for the identification of contingency plans should the mitigation site not progress toward meeting its performance standards.

2.11 Evaluation of Permittee-Responsible Mitigation and Monitoring

The Final Mitigation Rule provides the following guidance at 33 CFR 332.6(a)(1) *Monitoring*, “*Monitoring the compensatory mitigation project site is necessary to determine if the project is meeting its performance standards, and to determine if measures are necessary to ensure that the compensatory mitigation project is accomplishing its objectives. The submission of monitoring reports to assess the development and condition of the compensatory mitigation project is required, but the content and level of detail for those monitoring reports must be commensurate with the scale and scope of the compensatory mitigation project, as well as the compensatory mitigation project type. The mitigation plan must address the monitoring requirements for the compensatory mitigation project, including the parameters to be monitored, the length of the monitoring period, the party responsible for conducting the monitoring, the frequency for submitting monitoring reports to the district engineer, and the party responsible for submitting those monitoring reports to the district engineer.*” The excavation of 15.68 acres of brackish marsh will be mitigated through the restoration of a 42-acre brackish marsh site. Approximately 28.8 acres of the restored marsh will be used as mitigation for the impacts associated with excavation. The remaining mitigation credits/acres would be used for any additional compensatory mitigation that might be needed by the Corps to maintain the Savannah Harbor Navigation Project at a future date. The USACE will monitor the restoration site for a period of seven years and the success of the brackish marsh will be based on meeting or exceeding the annual values defined for the percent of vegetative coverage for *Spartina alterniflora* (Please see previous table). The marsh transects would be sampled twice annually (June and October). The Corps would provide annual reports of the performance monitoring to the Interagency Coordination Team (ICT) for review. In turn, the ICT would meet on an annual basis to discuss the result of those findings. The USACE believes this level of monitoring is acceptable and commensurate with the scale and scope of the anticipated impact.

2.12 Evaluation of Permittee-Responsible Mitigation and Site Protection

The Final Mitigation Rule provides the following guidance at 33 CFR 332.7(a)(1) *Site Protection* “*The aquatic habitats, riparian areas, buffers, and uplands that comprise the overall compensatory mitigation project must be provided long-term protection through real estate instruments or other available mechanisms, as appropriate. Long-term protection may be provided through real estate instruments such as conservation easements held by entities such as federal, tribal, state, or local resource agencies, non-profit conservation organizations, or private land managers; the transfer of title to such entities; or by restrictive covenants. For government property, long-term protection may be provided through federal facility management plans or integrated natural resources management plans.*” The excavation of 15.68

acres of brackish marsh will be mitigated through the restoration of a 42-acre brackish marsh site. Approximately 28.8 acres of the restored marsh will be used as mitigation for the impacts associated with excavation. The remaining mitigation credits/acres would be used for any additional compensatory mitigation that might be needed by the Corps to maintain the Savannah Harbor Navigation Project in the future. The restoration site (Disposal Area 1S) is located within the boundaries of the SNWR. However, USACE and GDOT still maintain an easement on the Disposal Area that could allow for disposal and continued management of dredged material at a later date. As illustrated in Appendix A of this report, the USACE used a 0.5 value for the "Control" factor in the Savannah District's SOP calculation. The 0.5 value is the highest value that can be recorded for the "Control" factor. By using this control factor, USACE and GDOT agree to relinquish the easement that could allow for future use of Disposal Area 1S. Once the area has been restored to a functioning brackish marsh ecosystem, it will also be permanently protected through the State of Georgia's Coastal Marshlands Protection Act. Finally, the restoration area is already within the boundaries of the SNWR. The resulting marsh will be contiguous with existing marsh that abuts the restoration site. As such, the restored marsh will be permanently integrated into the same conservation and management plan that currently protects existing brackish marsh areas within the SNWR. Thus, the lands would be subject to the same protections and use requirements as defined in the National Wildlife Refuge System Improvement Act of 1997 (Improvement Act).

2.13 Evaluation of Permittee-Responsible Mitigation and Sustainability

The Final Mitigation Rule provides the following guidance at 33 CFR 332.7(b)(1) *Sustainability* "Compensatory mitigation projects shall be designed, to the maximum extent practicable, to be self-sustaining once performance standards have been achieved." The health and function of the restored Spartina marsh will ultimately be determined by achieving the appropriate elevation and the continued input of brackish water by the twice daily tides events. This critical step (i.e., setting the correct ground elevation) and resulting success will be known early in the restoration process as indicated by the recruitment of Spartina plants in the first few years. As requested by the USFWS, a "feeder" creek system would also be constructed toward the interior of the restored marsh. The creek would provide another mechanism of ensuring adequate exchange of brackish, surface water with pore waters that are located on the interior of the site. If 80% vegetative cover is achieved at the end of the five year monitoring period, then the self-sustaining nature of the site will be assured since selection of the appropriate "productive" elevation is relatively finite. In other words, there would be no need for pumps or other mechanical features to maintain the hydrologic input or vegetation of the established site. Thus, the restored site would be as likely to thrive in the future as any of the other adjacent brackish marsh sites in the vicinity.

2.14 Evaluation of Permittee-Responsible Mitigation and Adaptive Management

The Final Mitigation Rule provides the following guidance at 33 CFR 332.7(c)(2-3) *Adaptive Management* "If monitoring or other information indicates that the compensatory mitigation project is not progressing towards meeting its performance standards as anticipated, the responsible party must notify the district engineer as soon as possible. The district engineer will

evaluate and pursue measures to address deficiencies in the compensatory mitigation project. The district engineer will consider whether the compensatory mitigation project is comparable to the original objectives of the compensatory mitigation project. (3) The district engineer, in consultation with the responsible party (and other federal, tribal, state, and local agencies, as appropriate), will determine the appropriate measures. The measures may include site modifications, design changes, revisions to maintenance requirements, and revised monitoring requirements. The measures must be designed to ensure that the modified compensatory mitigation project provides aquatic resource functions comparable to those described in the mitigation plan objectives." The development of the restored marsh also includes an adaptive management plan, which would require the planting of juvenile *Spartina alterniflora* plants if the site does not begin to naturally revegetate with the rate of colonization indicated in Table X. The site will be inspected twice annually (June and October). The presence of invasive species will be documented. If invasive species are identified, they will be removed from the site via hand grubbing or another method approved by the Wetland Interagency Coordination Team (ICT). Should the restored marsh not meet the success criteria illustrated in the previous table, the ICT would identify and/or recommend corrective actions, including planting requirements and associated sprig densities, which would achieve compliance with the reported percentages in the previous table. The need for corrective action(s) would be determined and/or implemented annually with agency involvement and concurrence. Annual monitoring reports would be generated over a period of five years and provided to the ICT. If at the end of five years the plant density at the restored marsh does not achieve 80% coverage, then Savannah District would purchase saltmarsh mitigation credits from an approved mitigation bank to compensate for the remaining loss in function. If no saltmarsh mitigation banks were available, then the ICT would be consulted for a determination on how to proceed (Please see updated Appendix C-Mitigation Planning).

If monitoring results indicate additional mitigation is required, then the USACE shall coordinate with the ICT to develop an appropriate course of action.

2.15 Evaluation of Permittee-Responsible Mitigation and Long-Term Management

The Final Mitigation Rule provides the following guidance at 33 CFR 332.7(d)(1), *Long-term management*, "The permit conditions or instrument must identify the party responsible for ownership and all long-term management of the compensatory mitigation project. The permit conditions or instrument may contain provisions allowing the permittee or sponsor to transfer the long-term management responsibilities of the compensatory mitigation project site to a land stewardship entity, such as a public agency, non-governmental organization, or private land manager, after review and approval by the district engineer. The land stewardship entity need not be identified in the original permit or instrument, as long as the future transfer of long-term management responsibility is approved by the district engineer." If 80% vegetative cover is achieved at the end of the five year monitoring period, then the self-sustaining nature of the site will be assured since selection of the appropriate "productive" elevation is relatively finite. The restored site would be as likely to thrive in the future as any of the other adjacent brackish marsh sites in the vicinity. The restoration area is already within the boundaries of the SNWR, and the resulting marsh will be contiguous with existing marsh that abuts the restoration site. As such,

the restored marsh will be permanently integrated into the same conservation and long-term management plan that currently protects existing brackish marsh areas within the SNWR. Thus, the lands would be subject to the same protections and use requirements as defined in the National Wildlife Refuge System Improvement Act of 1997 (Improvement Act).

The Final Mitigation Rule provides the following guidance at 33 CFR 332.7(d)(2) which states, *"A long-term management plan should include a description of long-term management needs, annual cost estimates for these needs, and identify the funding mechanism that will be used to meet those needs."* With respect to restoration of the 42-acre marsh site, long-term management needs would be negligible. The methodology for restoring and sustaining a brackish marsh system is somewhat rudimentary with the greatest risk of success being identified within 1-2 years following the initial grading and/or establishment of the appropriate elevations (please see section 2.13 *Sustainability* for additional information). The *in situ* tidal flushing, protection of SNWR, and continuity with 44 acres of existing brackish marsh, all validate the USACE's position that there are no long-term needs required specific to the restored marsh. However, long-term management needs of the SNWR, which will include the restored salt marsh, are determined by annual budget authorizations from Congress. In 2005, the SNWR had an operating budget of \$3,582,000. Although the monetary value cannot be ascertained from year to year, the same type of annual budget authorization from Congress is expected to continue well into the future for SNWR. As such, protection and long-term management of the SNWR as well as the restored marsh site are also anticipated.

The Final Mitigation Rule provides the following guidance at 33 CFR 332.7(d)(3) which states, *"In cases where the long-term management entity is a public authority or government agency, that entity must provide a plan for the long-term financing of the site."* Once restored and the success of the site has been achieved at the end of five years, the brackish marsh would be managed like the other diverse habitats located within the SNWR. As part of the SNWR, the lands would be subject to the same protections and use requirements as defined in National Wildlife Refuge System Improvement Act of 1997 (Improvement Act). Thus, USACE has concluded that no additional long-term management requirements are necessary for the preserved land.

3.0 Conclusion

This section of Appendix C-Mitigation Planning, entitled "Consideration of 2008 USEPA/USACE Mitigation Rule," provides detailed analysis and justification for use of 2,683 acres of preservation mitigation to offset impacts associated with indirect impacts (i.e., vegetative conversion) to tidal marsh. Additionally, this section also justifies the restoration of brackish marsh at Disposal Area 1S as mitigation that offsets direct impacts to 15.68 acres of brackish marsh. As specified in the 2008 Final Compensatory Mitigation Rule, the USACE used a sequential and systematic approach to reach a definitive conclusion regarding the validity of the respective mitigation plans for impacts to wetlands, and therefore, USACE has complied with all elements of the Rule. By complying with the Rule, USACE is also satisfied that acceptable and appropriate compensatory mitigation for wetland impacts has been achieved, and implementation of the proposed mitigation plans will ensure that the national policy of "no net loss" of aquatic resources has been fulfilled.



UNITED STATES DEPARTMENT OF COMMERCE
National Oceanic and Atmospheric Administration
 NATIONAL MARINE FISHERIES SERVICE
 Southeast Regional Office
 263 13th Avenue South
 St. Petersburg, Florida 33701-5505
 (727) 824-5312; FAX 824-5309
<http://sero.nmfs.noaa.gov>

NOV 04 2011

F/SER31: KBD

Colonel Jeffrey M. Hall
 Commander, Savannah District
 U.S. Army Corps of Engineers
 Department of the Army
 100 W. Oglethorpe Avenue
 Savannah, Georgia 31402-0889

Dear Colonel Hall:

NOAA's National Marine Fisheries Service (NMFS) provides the attached final biological opinion (opinion) on species listed under the Endangered Species Act (ESA) of 1973. NMFS is providing the U.S. Army Corps of Engineers (COE) this opinion pursuant to 50 CFR 402.14(h). This document is based on our review of impacts associated with the proposed federal navigational channel dredging activities for the Savannah Harbor Expansion Project (SHEP) to be conducted by the Savannah District COE.

Information concerning the proposed action was obtained by our review of the Biological Assessment (BA), Draft Environmental Impact Statement (DEIS), and Draft General Re-evaluation Report (DGRR) for the SHEP in Chatham County, Georgia, and Jasper County, South Carolina. Supplemental reports were also provided by the Savannah District. This opinion concludes that the proposed action is not likely to jeopardize species listed or proposed for listing under the ESA under NMFS purview and provides reasonable and prudent measures, along with their implementing terms and conditions.

The findings presented in the opinion are not intended to act as the Secretary of Commerce's (the Secretary) final approval of this project as required by the Water Resources and Development Act of 1999 (WRDA) Section 101(b)(9), Public Law 106-53. The Secretary's final decision will depend on a determination that the proposed mitigation measures will adequately address the potential environmental impacts of the project. The mitigative measures include the following actions that must be fulfilled in the agreed upon time frames included in the opinion:

- 1) Finalization of the off-channel rock ramp fish passage design in coordination with NMFS and the other federal and state resource agencies.




- 2) Construction of the fish passage facility at the New Savannah Bluff Lock and Dam to provide access to historical spawning habitat for sturgeon as a mitigation measure.
- 3) Completion of the development and implementation of a comprehensive monitoring and adaptive management plan in coordination with NMFS and the other federal and state resource agencies to help insure the success of all mitigative measures including the fish passage facility.

The no jeopardy conclusion of the opinion is contingent on agreement to implement and maintain all of the mitigative measures.

We appreciate the COE's efforts in working together with NMFS to identify methods and measures to address complex conservation issues that, when implemented, will provide protection for endangered species under NMFS' authority.

We will continue to provide interagency coordination on this project under all our authorities and to work with the COE to finalize the agreed upon protective measures associated with this project. Our primary contact for endangered species issues is Kay Davy. She may be reached by phone at (954) 356-6791 or by e-mail at Kay.Davy@noaa.gov.

Sincerely,



Roy E. Crabtree, Ph.D.
Regional Administrator

Enclosure



An Update on the Jasper Ocean Terminal

March 11, 2011


WHAT'S INSIDE

Executive Summary, Page 3
A Landmark Opportunity, Page 4
The Demand, Page 6

The Benefits, Page 7
Technical Details, Page 11
Timeline, Page 14

Strengthening Our Ports Authorities,
Page 16
The Road Forward, Page 17
FAQs, Page 18

CHARLESTON, GARDEN CITY DEMAND AND CAPACITY

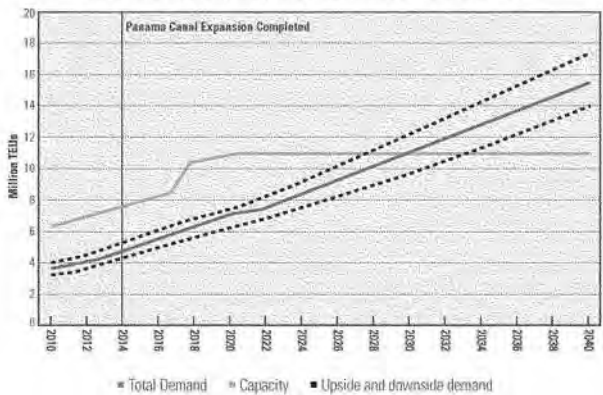

SOURCE: Moffatt and Nichol



THE JASPER TERMINAL COULD ADD ONE MILLION JOBS AND \$9 BILLION TAX REVENUE TO SOUTH CAROLINA AND GEORGIA

PORT EXPANSION CAN SIGNIFICANTLY INCREASE STATE AND LOCAL TAX REVENUES IN 2040...

...AND GENERATE SUBSTANTIAL EMPLOYMENT OPPORTUNITIES

State and local taxes¹ generated by ports in South Carolina and Georgia

Jobs² created by ports in South Carolina and Georgia



- Assuming taxes and jobs scale with port volume
- Assumes that higher container density and efficient operations will lead to increased port utilization of existing port facilities

¹ Taxes measured in billions

² Jobs measured in thousands

³ Job creation does not include construction

SOURCE: American Association of Port Authorities (AAPA), University of Georgia study, Wilbur Smith Associates, US Census Bureau

EXECUTIVE SUMMARY

With our nation's trade realities changing, one-time challenges are becoming future opportunities.

After years of competition, Georgia and South Carolina have agreed to jointly develop and oversee a deep-water container terminal on the banks of the Savannah River. This new port—known as the Jasper Ocean Terminal—has the potential to generate one million jobs and \$9 billion in tax revenue for the two states by the year 2040.¹

In 2007, this opportunity convinced South Carolina Gov. Mark Sanford and Georgia Gov. Sonny Perdue to put aside years of litigation and agree upon a collaborative approach for development of the Jasper Ocean Terminal. This was documented in a term sheet and subsequently an intergovernmental agreement to deepen the harbor and free a large potential site from an easement held for dredge placement:

"In: After the release, modification or removal of the Corps Easement from the Phase One property and the required approval and ratification of the interstate compact approving the Bi-State Compact Authority by the Georgia and South Carolina legislatures and the U.S. Congress, the parties acknowledge that the deepening of the Savannah River navigation channel as conditionally authorized in the federal 1999 Water Resources Development Act and set forth as the Savannah Harbor Project further described at www.savharbor.com will be beneficial to the development of the Phase One Property."

This simple deal, to support deepening the harbor, enter a bi-state compact and release the easement, led to establishing the Joint Project Office. Work done since then has confirmed the value of the enterprise and the wisdom of the agreement.

Driving this opportunity are several factors that will cause East Coast container traffic to triple by 2020:²

- Southeastern businesses and farmers produce many of the most valued exports in the United States, including agricultural products and industrial equipment. These exports generate tremendous private- and public sector revenue. Demand will increase for these raw materials which, in turn, will drive the increase in exported cargo.
- A 2014 expansion of the Panama Canal will enable vessels up to three times larger than most ships that currently traverse the canal to quickly and easily reach ports along the East Coast. This will reduce the cost of a container from Shanghai traveling into the Southeast by roughly 20 percent, extending the region's logistics competitiveness into the Midwest.
- Population and business growth in the Southeast are expected to drive consumer demand for imported products.
- More goods are being manufactured in Southeast Asia, and that cargo is being shipped through the Suez Canal and then to the East Coast, bringing additional containers to the region.

Located 10 miles downstream of Savannah's Garden City Terminal, the Jasper Ocean Terminal will be built on recovered dredge material along the Georgia-South Carolina border. Once completed, it will be the premier port on the East Coast, complete with state-of-the-art technology and green features that will reduce its environmental footprint and increase service efficiencies.

The Jasper Ocean Terminal will be designed as a state-of-the-art, world-class terminal able to handle effectively the new post-Panamax ships (up to 12,600 TEUs) which require 50-foot depth and 156-foot width. The Georgia Ports Authority, through its Savannah Harbor Expansion Project, is planning to deepen the river channel from 42 to 48 feet ahead of the required schedule for the terminal, and the South Carolina State Ports Authority also is planning to deepen the harbor in Charleston.

As planned, the new terminal will feature 10 berths (phased in to meet rising demand), a turning basin, road and rail access corridors, and supporting infrastructure on 1,500 acres in Jasper County, S.C. This new investment will increase the region's capacity by seven million twenty-foot equivalent units (TEUs) while propelling the local economy of one of the nation's poorest counties.

Despite recent and planned investments to upgrade and expand facilities in Charleston and Savannah, both ports are expected to be at capacity for container throughput between 2025 and 2030. The Jasper Ocean Terminal will handle the millions of additional containers that current plans for Georgia and South Carolina will not.

To seize the opportunity, the two states must put aside their differences and continue to work together to turn future opportunities into jobs and dollars for their citizens. If not, international shippers will move to other states offering more capacity, greater efficiency and deeper harbors.

¹ University of Georgia study; Wilbur Smith & Associates study
² American Association of Ports Authorities; Maffei & Nishel

A LANDMARK OPPORTUNITY

Located approximately 12 miles from the sea buoy, the 1,500-acre Jasper Ocean Terminal site is widely considered to be the best remaining undeveloped port site on the East Coast. For more than 15 years, local leaders have sought a port in Jasper County.

While located on the South Carolina side of the Savannah River, the site was controlled by the Georgia Department of Transportation and utilized by the U.S. Army Corps of Engineers for storing dredge material. The desire to secure the land for a port led to protracted litigation between Georgia and South Carolina.



Accomplishments to Date

Recognizing not just the need but also the potential of a shared port, Governors Perdue and Sanford signed a memorandum of understanding in 2007, setting up the original framework to guide the construction and oversight of the Jasper Ocean Terminal. The premise was simple—there was more to be gained by working together than competing against one another. Since then, much has been done.

Most importantly, the landmark agreement paved the way for an intergovernmental agreement and the establishment of the Joint Project Office. Comprised of six volunteer board members—three from each state—the Joint Project Office is charged with developing the new port.

In July 2008, the Joint Project Office, working through the Georgia and South Carolina ports authorities, evaluated potential sites, secured funds and jointly acquired the 1,500-acre Jasper County site from the Georgia Department of Transportation for \$7.5 million or \$3.75 million from each state.¹

The Joint Project Office has also contracted with Moffatt & Nichol, one of the most respected maritime engineering firms in the world, to manage the process of conducting site analysis, planning and permitting. The process will be lengthy, but strategic and thorough. The resulting analysis will guide the port through complex federal and state processes and ensure protection of the delicate Lowcountry ecosystem.

Throughout 2009 and 2010, the Joint Project Office and Moffatt & Nichol interfaced with the U.S. Army Corps of Engineers for guidance on the permitting process and a dredge material management plan, finalized capacity and economic studies, and developed a detailed Preliminary Planning & Development Services Report that will guide the port's development.

In late 2010, the Joint Project Office retained Doug Marchand, a respected port executive, as a part-time executive advisor, to guide the port forward.

Full Speed Ahead

Currently, the site is under easement running to the U.S. Army Corps of Engineers, which manages the dredging process for the Savannah River. The Corps has indicated that, if the two states work together to develop the property and manage a joint port, which includes identification of an alternate site for dredge disposal, it will release the easement once the permitting process is complete.

Given these factors, the 15-year timetable for permitting and construction is not unusual. Georgia has devoted the past 15

¹ The Joint Project Office acquired 1,517.9 acres at \$5,000 per acre for a total purchase price of \$7,589,900 or \$3,794,950 from each state.

years to the permitting and study of deepening the Savannah River, while South Carolina, which received approval to expand the Charleston port in 2007, projects to open its new terminals in 2018. The two authorities have used long-term planning to grow their businesses over the past two decades.

The Jasper Ocean Terminal will be designed as a state-of-the-art, world class terminal, able to handle effectively the new Panamax 12,000 TEU ships, requiring 50-foot depth and 158-foot width. The Georgia Ports Authority, through the Savannah Harbor Expansion Project, is planning to deepen the river channel from 42 to 48 feet, ahead of the required schedule for the Jasper Ocean Terminal.

Charleston, too, is planning to deepen its harbor.


The proximity and accessibility of three deep-water ports in the Southeastern U.S. has the potential to transform the region into a global shipping hub. With a projected 12 million plus TEUs expected to pass through the ports of Charleston and Savannah by 2025-2030¹, and East Coast ports in need of additional capacity in that same timeframe, the Jasper Ocean Terminal offers a unique opportunity for the region.

Other ports along the East Coast are already taking concrete steps to accommodate the future influx of cargo. In Norfolk, Va., the Virginia Ports Authority is undertaking a massive reclamation project on Craney Island that will grow its cargo capacity. The Norfolk harbor is already 52 feet deep. The Port Authority of New York & New Jersey hopes to expand its container terminal on Staten Island and raise the Bayonne Bridge, while the Jacksonville Port Authority has strengthened ties to overseas shippers and is investing in terminal expansions and joint ventures.

By bringing the Jasper Ocean Terminal online, the two states will have positioned themselves to gain upward of 19 million TEUs annually through the three primary deep-water ports in Savannah, Charleston and Jasper². Furthermore, doing so will accommodate continued export growth in the Southeast, spur accelerated economic growth in the two-state area and strengthen the region as a major player in international trade.



PANAMA CANAL EXPANSION AND GLOBAL ECONOMIC CHANGES WILL BRING BIGGER SHIPS TO OUR PORTS

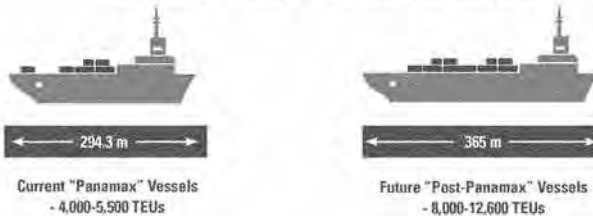

¹ American Association of Ports Authorities; Maffett & Nichol
² Maffett & Nichol

SOURCE: Courtesy of the Panama Canal Authority

THE DEMAND

In 2008, the ports of Garden City (Ga.) and Charleston handled a combined 4.26 million TEUs of containerized cargo.⁴ By 2030, it is expected the two ports will be near capacity with a need to handle more than 12.3 million TEUs.⁵


This amounts to a 6 percent annual increase through 2025, which is twice the expected rate of GDP growth, the experience of the last 30 years, as well as a 4.6 percent annual growth from 2025 through 2040. Accommodating this growth requires careful planning and an understanding of a number of factors that make the Southeast a focal point for a boom in container shipping.

Most critically, the Southeast is the U.S. export leader, and this dominant role is expected to increase in the decades ahead. As personal incomes rise in developing nations, much of that money is spent on a key U.S. export: meat. The Southeast is a leading exporter of poultry, pork and beef. Developing nations also have a strong appetite for manufactured goods produced in the South as well as wood fiber and minerals from the region. State and federal governments also benefit from taxes on U.S. exports, which help lower the trade deficit.



Secondly, the Panama Canal Authority will have completed one of its most ambitious goals in time for its centennial in 2014: the deepening

FUTURE DEMAND AND PORT CAPACITY CONSTRAINTS OPEN THE POSSIBILITY OF AT LEAST FOUR TIMES THE CONTAINER TRAFFIC IN 10 TO 15 YEARS

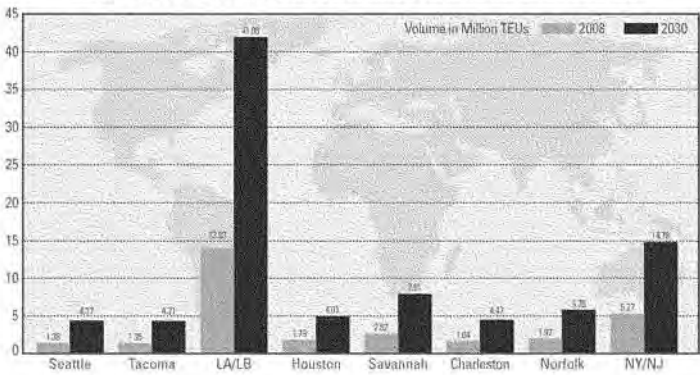

- Container imports are expected to double by 2020
- Rail freight tonnage is expected to increase by 50% by 2020 and could become a bottleneck

SOURCE: American Association of Port Authorities (AAPA); Moffatt & Nichol; U.S. Army Corps of Engineers

⁴ Georgia Ports Authority; South Carolina State Ports Authority
⁵ Moffatt & Nichol

of the canal to 50 feet, which will allow a new breed of container ships called "Post-Panamax" to quickly access the Eastern U.S. from Asia. These new Post-Panamax ships will carry 15 to 50 percent more container volume when fully laden than most ships currently visiting Savannah and Charleston.

Deepening the canal could have a larger impact than volume alone. The new, larger ships won't just carry more containers; they will reduce costs for shipping to Midwestern states via the East Coast by as much as \$400 per TEU, or \$800 per 40 foot container, a 20 percent reduction¹, making Southeastern ports more competitive for business that has traditionally entered through the West Coast and traveled over land to Chicago, Memphis and other mid-continent destinations.

Container traffic also will continue to grow from the Atlantic Ocean, arriving from Africa and Southwest Asia via the Suez Canal. Trade with Vietnam, Indonesia, India and other nations should increase significantly as they expand their manufacturing capacity and build out their logistics infrastructure. Ships traveling from these regions often use the Suez Canal, which is already deep enough to accommodate Post-Panamax vessels.

It is expected that harbors in Savannah, Charleston and throughout the East Coast will be deepened and expanded to accommodate the new and larger ships by 2015. But will the ports have the capacity to handle the containers?

Moffatt & Nichol has analyzed this pivotal question using data from the Port Import Export Reporting System (PIERS), published in the *Journal of Commerce*, and taking into account expansion plans at leading ports throughout the nation. Southeastern U.S. container port demand will begin to exceed capacity in 2029, and the unmet demand grows to almost eight million TEUs by 2037.² The Georgia Ports Authority's Garden City Terminal and South Carolina State Ports Authority's Charleston terminals are expected to be near capacity between 2025 and 2030. The Jasper Ocean Terminal will be delivered just in time to ensure that the Southeastern U.S. remains a strong hub for global trade.

THE BENEFITS

Development of the Jasper Ocean Terminal offers opportunities on multiple levels. The advantages to local communities are obvious, but the region and nation will benefit as well. A new deep-water, state-of-the-art port on the Georgia-South Carolina border will boost international trade for the good of exporting companies and the nation's trade balance. The new terminal will be more than an economic engine; it will send a message to the world that the Southeast is fully committed not just to the container business, but to working cooperatively to develop state-of-the-art facilities that can accommodate all types of goods and services.

Capitalizing on careful planning, a new site and insights from some of the world's most advanced ports, plans call for a state-of-the-art "green" port that will use new technology and techniques to drive efficiency and minimize environmental impact.



¹Moffatt & Nichol

²Jasper Ocean Terminal: Preliminary Business Case

Building a Southeastern hub

Just as the ports of Los Angeles and Long Beach and the Port Authority of New York & New Jersey have built international reputations based on their cooperative approaches to maritime commerce, the Jasper Ocean Terminal offers the opportunity for the two leading ports authorities in the Southeast to do the same (see page 16 for more on the impact on the current ports). Currently a leader in container shipping with a combined 4.3 million TEUs annually¹⁴, both ports authorities anticipate they will be at or near capacity between 2025 and 2030 as container growth continues. Planning and opening a jointly operated container terminal just eight miles from the open water of the South Atlantic will show shipping lines, and their domestic and foreign trade partners, the region's commitment to an ongoing investment in their business.

Boistering international trade

International trade is expected to continue exponential growth well into the middle of this century. The addition of an efficient container port with capacity in excess of seven million TEUs will further enhance the U.S.'s international position as an importer and exporter, offering further capacity not just to the Deep South, but to companies based in Kentucky, Ohio, Indiana and Illinois as well. This 12-state market is home to many of the nation's leading consumer goods companies, as well as top exporters of poultry, chemicals, pulp and paper, kaolin, agricultural commodities, construction equipment and many other top U.S. products. By investing in infrastructure that allows American businesses to serve the world more quickly and efficiently, the two states are preserving jobs and helping corporations grow stronger.



Lower exchange values and rising demand from emerging markets also foster a climate of growth for U.S. exports. This combination will reduce the nation's existing trade imbalance, boosting the overall American economy by aiding the domestic manufacturing sector and generating millions of dollars in tax revenue for the federal government and state governments.

Both states' ports are known for their balance between imports and exports, reflecting the relative health and diversity of the Southeastern economy. In 2010, Georgia's import/export ratio was 48 percent to 52 percent; Charleston's was 50 percent to 50 percent.

Breaking new ground with a green port

The Jasper Ocean Terminal will have the advantages of a clean slate. For decades, ports around the nation have expanded, but are often constrained in terms of efficiency and innovation by existing site conditions, brownfield challenges and ongoing operations.

By building on a new site atop dredge material, the Jasper Ocean Terminal will turn an underutilized location into an economic engine that will be an international model for the use of cutting-edge technology to improve customer service, create high tech jobs and minimize environmental impacts in a port setting.

¹⁴ American Association of Ports Authorities; Muffatt & Nisdel

Green technology

The Joint Project Office has committed to building a best-of-class green terminal. Engineering firm Moffatt & Nichol is utilizing its green building experience on the Jasper Ocean Terminal. State-of-the-art technologies will allow storage, sorting and retrieval of specific containers with minimal handling. The only planned buildings on site (an administration/operations building and maintenance facility) are expected to be LEED-certified through the use of careful building siting, construction with recycled materials and energy-efficient equipment. Other green plans for the site include:



- **Smart grid:** Preliminary plans call for the installation of a smart grid on the site, which will allow energy to be recaptured from quay and yard cranes as they deposit containers. This energy can be returned to the grid, allowing for a net-zero effect when it comes to power use.
- **Alternate energy:** The location of the port across from one of the nation's largest liquid natural gas terminals could offer the ability to utilize LNG as an alternate fuel.
- **Shore power systems:** Container berths will be designed with a shore-power system to allow vessels to shut off on-board generators and use on-shore electricity to reduce emissions. This system is particularly effective for longer stays at berth and is normally associated with larger vessels.
- **Best-of-class terminal operating system:** An integrated terminal operation system will efficiently coordinate operations by minimizing the number of moves for each container from ship to truck or train.
- **Electric emphasis:** The Jasper Ocean Terminal is expected to rely heavily on electric-powered container handling equipment, drastically reducing the carbon footprint of terminal operations.
- **Energy reduction:** Use of sophisticated, motion-sensitive lighting systems balance worker safety and energy reduction. These lighting systems eliminate light pollution while also saving energy and money. The net result will be an innovative container terminal that is safer, quieter, more energy efficient and environmentally friendlier that blends in well with the sensitive surrounding ecosystem and residential communities.

Site advantages and aggressive mitigation

The 1,500-acre site, due to its location on recovered dredge material, will require little mitigation, and it offers the unique opportunity to develop a major terminal with minimal impact on existing marsh front and beachfront property, residential homes and commercial developments.

Providing infrastructure to the site will require road, rail and utility access across wetlands. These access points will be extensively mitigated by preserving and replenishing sites elsewhere in the immediate area. The infrastructure also will feature the most advanced construction techniques to reduce environmental impact and minimize footprint size. A lack of at-grade crossings will limit noise pollution for inbound and outbound traffic, and the latest technologies will be used to make sure water, power and other utilities are delivered to the site with the least possible impact.

Local economic impact

With its location on the Savannah River along the Georgia-South Carolina border, both states will benefit significantly from the development of the new terminal. Specifically, construction of phase I of the Jasper Ocean Terminal, as currently planned, has the potential to create:

- One million jobs both at the port and in spin-off business by 2040¹¹.
- More than 300 direct and indirect jobs annually in construction and engineering from 2020-2025 to install the necessary infrastructure (roads, bridges, utilities) and build out the first phase of the terminal¹², including \$81 million in total wages paid over the life of the build out.



South Carolina and Jasper County

Residents of South Carolina's Jasper County have been working for decades to secure a port on the South Carolina side of the river. With a 20.7 percent poverty rate¹³, Jasper County is one of South Carolina's poorest counties. The benefits of a deep-water container port are many:

- Jasper County offers any number of greenfield sites that are ideal for distribution facilities. A planned interchange on I-95 will create additional opportunities for port-related development.
- Various studies have projected the creation of thousands of jobs for residents of Jasper and surrounding counties from development of the port and ancillary facilities. More importantly, the jobs will offer relatively stable, high wages and full benefits, and help shift the economy of the region. Residents will become less dependent on service jobs in the tourism and resort industries in neighboring Beaufort (S.C.) and Chatham (Ga.) counties.
- By building on an existing dredge site, the project will transform an underutilized portion of the county into an economic engine for the region. The necessary upgrades in infrastructure—widening of U.S. Highway 17 and revitalizing existing and building new rail lines—will lay the foundation for future commercial and residential growth in Jasper County while employing additional residents.

One of the original reasons for the development of a port in Jasper County was to help lift many of the residents of Jasper and surrounding counties out of chronic poverty. High-paying, high-quality jobs in the international trade supply chain will support that transition.

Ripple effects of the Jasper Ocean Terminal carry beyond the Lowcountry. Columbia, Anderson and Greenville-Spartanburg have made a concerted effort to grow their international profiles. Companies such as BMW, Michelin and many others employ thousands and are critically affixed to the competitive nature of international commerce. They are active importers and exporters.

Georgia

For Georgia, the case for the Jasper Ocean Terminal is simple mathematics. Most importantly, the state can continue to expand its highly successful container business as capacity becomes constrained at the Georgia Ports Authority's existing terminals. Also, many of the shippers can be expected to use existing or planned distribution facilities in Chatham and Bryan counties for goods that come off the ships at Jasper.

Georgia is home to leaders in international trade like AJC International, the world's largest importer and exporter of proteins, and

¹¹ University of Georgia economic study: Wilbur Smith & Associates

¹² Moffatt & Nichol

¹³ 2009 U.S. Census Estimate

companies such as The Home Depot, Georgia Pacific, GE Energy Systems and others that are critically reliant on increased port capacity for both imports and exports. These Georgia-based businesses will benefit from the efficiencies and savings of a regional port, making them more competitive in an expanding global marketplace.

TECHNICAL DETAILS

Engineering, planning and permitting a new container port is a complex undertaking, requiring up to eight years to complete.

For those eager to get construction underway, the wait can be frustrating. However, careful planning and permitting ensure not only compliance with federal law, but protection of the environment around the site and region. The Joint Project Office has retained the services of Moffatt & Nichol, one of the nation's pre-eminent maritime engineering and planning firms, to help move through the process.

Prior to the permitting process, Moffatt & Nichol is working with the Joint Project Office on various preliminary reports ranging from economic justification for the project to design schematics. After approval from the Joint Project Office, an application for a permit will be filed.

Once underway, the permitting process will involve meticulous planning, careful analysis and intense public outreach. Federal law, including the National Environmental Policy Act (NEPA), requires that any federal action incorporate environmental values into its decision-making process. This is done by evaluating the project's impacts on the environment and exploring reasonable alternatives.

Instrumental to this process is the Corps' preparation of an Environmental Impact Statement (EIS) that identifies the best ways to develop the project while mitigating environmental impact. A public document with numerous opportunities for comment from community groups and government agencies, the EIS is developed by an independent consultant selected by the Corps. This work would be contracted for and funded by the Joint Project Office.

Another important task for the Joint Project Office will be preparing a Sponsor Plan to supplement the U.S. Army Corps of Engineers' Dredged Materials Management Plan (DMMP) for the Savannah Harbor. The Jasper Ocean Terminal will be built on an existing dredge site, relying on material from the FY96 Dredge Plan, as well as from the construction phase of the planned SHEP, to elevate the site and lay the foundation for the terminal's construction.

Once the permitting process is completed and construction is set to begin, a location must be established to accommodate future dredged material from the Savannah River that would otherwise have been deposited on the terminal site. Several options will be outlined in the Sponsor Plan, including alternative sites and the likely use of an existing Offshore Dredge Material Disposal Site.

Based on coordination with the U.S. Army Corps of Engineers, it is anticipated that the permitting timeline will run from 2012 through the end of 2019, with design and construction slated to begin shortly thereafter.



Status of the easement

The U.S. Army Corps of Engineers currently holds an easement on the proposed site, which it uses as a confinement facility for dredge material from the Savannah River. Every three years, the Corps pumps material onto the site to maintain the river's current depth of 42 feet.

The Jasper Ocean Terminal will have to be built upon solid footing, and it also will have to be above the 100-year flood plain. Current planning is to be 15 feet above the river for the terminal, while the dock and buildings will be elevated by 16 feet. The initial SHEP material will help in raising the site, while at the same time save the overall project an estimated \$300 million in construction costs.

While it may seem unusual to build a site on dredge material, this is a proven approach that may actually keep capital costs down. The ground will be prepared through the rather simple process of surcharging. At first, perforated pipes known as wick drains will be installed in the existing soil to remove moisture from the subsurface layers of sand. Then suitable fill material is placed on the site to compress the previously deposited dredged material. In approximately one year, the weight of the placed fill material will slowly compress the lower layers of moist sand, forcing ground water up and out, ultimately reducing the potential occurrence of global settlement in the future.

As a condition for releasing the easement, the Corps has said the two states must work jointly on the new port and craft a viable plan for its development. A congressional authorization even addresses the requirements that must be met for release of the easements (full copy of text on page 19). Included in these requirements are the preparation of a Sponsor Plan, bi-state agreement on governance of the Jasper Ocean Terminal, and plans for financing the port.

The Joint Project Office has been in constant contact with the Corps throughout the preliminary stages. As of now, the existing project timelines anticipate release of the easements in 2019 after completion of the permitting process and demonstrated progress in other areas listed above.

Deepening the Savannah River

Stretching from the mouth of the river all the way to the Garden City Terminal, SHEP will deepen the waters of the Savannah River from 42 feet to 48 feet and provide greater access for Post-Panamax container ships to Garden City and Jasper.

The development of the Jasper site is predicated on the success of ports in Charleston and Savannah. A completed SHEP and the planned expansion in Charleston are the first steps to accommodating the supply of containers that ultimately will fuel a successful Jasper Ocean Terminal. It is intended to complete additional channel deepening and widening of the channel to effectively accommodate the Post-Panamax ships.

Other environmental concerns

Since the terminal is being built on land reclaimed from the river bottom, no mitigation will be needed on the actual site. However, project infrastructure will impact some existing wetlands.

As outlined on page 9, aggressive steps are being taken to mitigate the off-site environmental impacts.

Within the 1,500-acre terminal, several "critical areas" have been identified, including numerous "bird islands" and tidal wetlands that will be impacted by the construction of transportation infrastructure. Out of more than 3,300 acres of wetlands, there are 226 acres that will be impacted by the development of the transportation corridor, and, in accordance with the Corps' protocol, the Joint Project Office will purchase mitigation credits within a 10-mile radius as an offset.

Connecting the infrastructure


This port needs to have multi-modal access to best facilitate the transport of its cargo to inland distribution centers, storage areas and ultimately consumers in the heartland. Service by rail and road is crucial, and the Jasper Ocean Terminal features a comprehensive plan to link the facility to major transportation corridors.

Winding its way through wetlands and marshes, a new rail corridor will span eight miles and connect the now dormant Hutchinson Lead with Jasper Ocean Terminal during phase II of the project.


The two Class I railroads that serve Savannah are CSX Corporation and Norfolk Southern, and the Jasper Port Authority intends that both will have dual access to Jasper Ocean Terminal. This accessibility will require the creation of a marshalling yard near the CSX Mainline at the Hutchinson Lead and a state-owned rail spur from the yard to the terminal.


To accommodate trucks, plans call for widening U.S. Highway 17 to four lanes from the Savannah Harbor Parkway to SC 170 Alternate, as well as from SC 170 Alternate to SC 170 West. In addition, a four-lane, divided, limited-access highway will be needed to connect the Jasper Ocean Terminal to U.S. Highway 17. A new South Carolina interchange on I-95 being sought by private developers could also serve trucks carrying containers.

Water, sewer, electric and telecommunications services will be provided by South Carolina Electric & Gas, Beaufort Jasper Water & Sewer Authority and Hargray Communications. All three providers have included the Jasper Ocean Terminal in their long-range master plans.

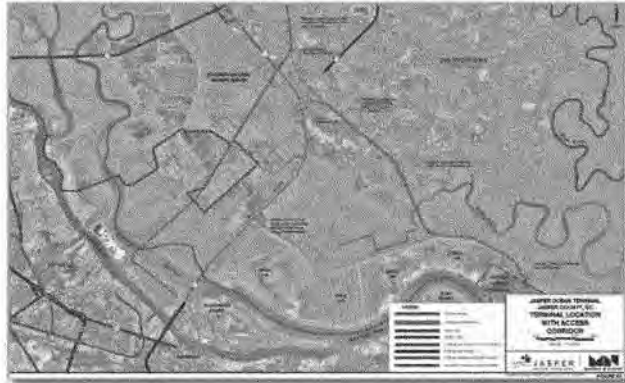

JASPER PORT TERMINAL PROJECT TIMELINE

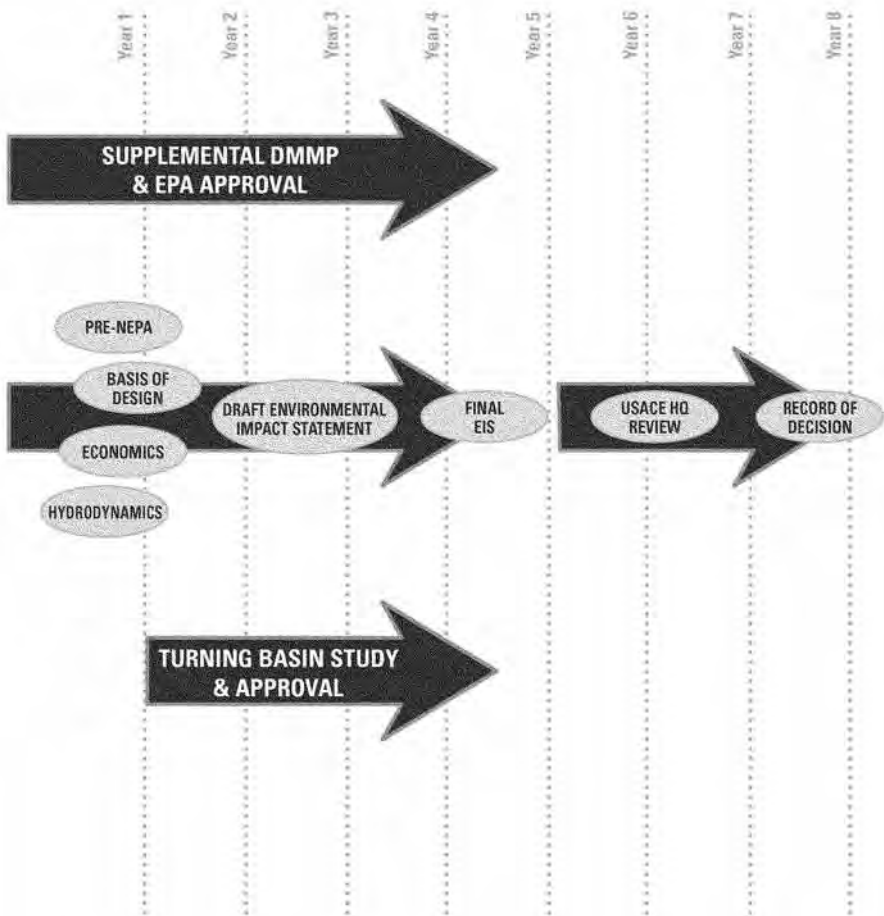

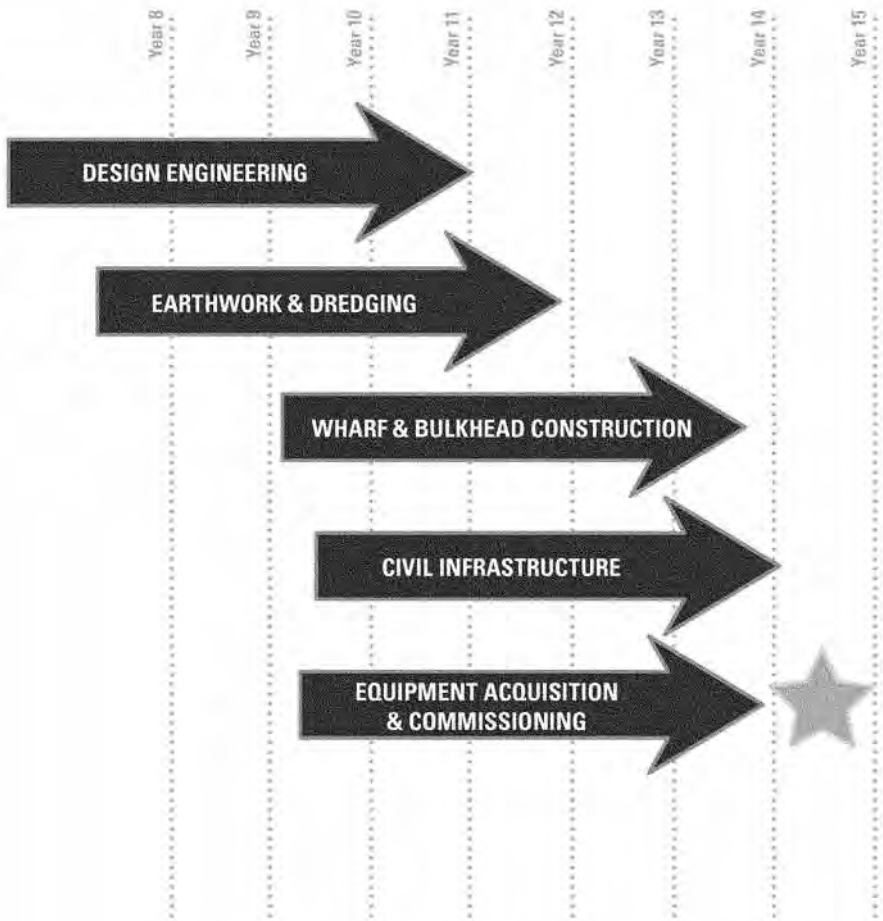

STRENGTHENING OUR TWO PORTS AUTHORITIES

Georgia and South Carolina have proud legacies as centers for commerce. Indeed, both states were founded in port cities, and maritime commerce has remained a foundation of their economies ever since.

Today, the commercial port activities in each state are directed by ports authorities, quasi-public agencies chartered by the respective state governments. The model used in Georgia, South Carolina, and a few other states is widely seen as the most cost-efficient approach. The ports authority model also allows states to control key investments in port infrastructure and closely track the economic impact of those investments.

The South Carolina State Ports Authority (SCSPA), based in Charleston, was founded in 1942. It oversees five separate terminals in Charleston that serve the container and Ro-Ro markets, and one in Georgetown that is a smaller, break bulk facility.

The Georgia Ports Authority (GPA) is headquartered in Garden City, just west of Savannah. It oversees six terminals in Savannah and Brunswick, including the flagship container terminal at Garden City, a break bulk facility along the Savannah River, and another in Brunswick that serves primarily as a Ro-Ro facility.

Planning for the future is critical for ongoing strategic and future planning is critical to the success of any port, and both ports authorities are planning for growth after strong growth in 2010. GPA is in the midst of deepening the Savannah River to accommodate Post-Panamax vessels. SHEP is expected to be completed in 2016.

As part of a 10-year, \$1.3 billion capital plan, SCSPA is adding three new berths at a new terminal on a former Navy Base site and is also in the early stages of planning to deepen the harbor in Charleston.

The two authorities, historically fierce competitors, have committed to work together on the Jasper Ocean Terminal. The project will have the benefit of established and proven planning processes that have been successful in Georgia and South Carolina. In both states, the systematic, strategic expansion of ports has generated hundreds of millions of dollars of economic impact, millions of tax dollars and thousands of jobs.



THE ROAD FORWARD

Since Governors Sanford and Perdue set the Jasper Ocean Terminal in motion more than three years ago, tremendous progress has been made. As discussed earlier, the two ports authorities are fully engaged, lending their credibility and planning skills to the process.

To move the Jasper Ocean Terminal to reality, several key issues must be resolved in 2011 and 2012:

Budget

The current Joint Project Office is working from a \$6 million allocation split by the SCSA and the GPA. These funds should be sufficient to fund activities through 2011. Once the permitting process begins, each state will need to devote \$1.2 million annually to cover the necessary costs. State leaders and the ports authority boards need to determine the best funding mechanism for planning, engineering, future permitting and eventually construction.

Further economic analysis

While a preliminary economic analysis was conducted in 2009, and additional studies from the University of Georgia and Wilbur Smith and Associates make a solid case for the port, it is expected that post-recession analysis could show an even stronger need for the Jasper Ocean Terminal. The Joint Project Office expects to task Moffatt & Nichol with an in-depth economic analysis and feasibility study as part of its program of work.

Governance

As required by law, the Joint Project Office has drafted a bi-state compact and submitted it to the state legislatures for review. In 2011, additional attention will be given to how the operations of the port will be handled, including questions related to jurisdiction, revenue sharing between ports authorities, and additional considerations.

Permitting

Permitting for harbors has become more complex. Federal resources are limited in a post-recession atmosphere, and it is likely the Jasper Ocean Terminal will have to self-fund many of the studies undertaken by the U.S. Army Corps of Engineers and other governmental bodies. The GPA and SCSA also have other significant capital projects at various stages of the permitting process that must be considered. Developing a clear path to permitting will be a critical effort for the board in 2011.

FREQUENTLY ASKED QUESTIONS



Who will pay for it and how much will it cost?

The intergovernmental agreement signed by the governors of Georgia and South Carolina calls for the two states to share in the capital costs for developing the Jasper Ocean Terminal. The states have already shared the expense of acquiring the land and preliminary planning and engineering. Given the expense of developing the port, the board and ports authorities expect to find creative ways to engage private sector investment in the project.

The total cost of the project—covering construction, dredging, infrastructure developments and other direct and indirect expenses—is expected to be in excess of \$4 billion. Phase 1, which is projected to begin construction in 2020, will cost approximately \$1.7 billion. Annual investments in the \$1-2 million range per state are necessary over the next 10 years to fund the permitting process and make sure Georgia and South Carolina will have the opportunity to capture the growth in the U.S. container market.

How will it be governed?

Oversight for the Jasper Ocean Terminal during the permitting process is shared by the GPA and SCSPA through the Joint Project Office. A draft of a bi-state compact has been submitted to the state legislatures for their consideration.

Won't the Jasper Ocean Terminal compete with Charleston and Savannah?

Success at Charleston and Savannah are a pre-condition for development of the Jasper Ocean Terminal. Plans call for the new port to come online in 2025 when both Charleston and Savannah are expected to be at capacity. The Jasper Ocean Terminal will be jointly managed by Georgia and South Carolina. Given that container traffic will continue to migrate to the existing ports, the Jasper Ocean Terminal will be utilized as a cooperative expansion of terminal space that will maximize the port investments already made in both states and provide economic benefits to both states.

What is the role of the U.S. Army Corps of Engineers?

The primary role of the Corps is to prepare the Environmental Impact Statement. It also holds the easement that, for now, limits the development potential of the Jasper County site.

Currently, the site stores dredge material from the maintenance of the Savannah River. Before construction begins, the U.S. Army Corps of Engineers will have to release the easements. This will only occur pending acceptance of the Joint Project Office's proposed Sponsor Plan that identifies an alternative location to place dredge material and how any incremental increase in cost will be funded.

According to Gen. Joe Schroedel, former commander of the South Atlantic Division of the Corps, any release of the easement is contingent upon cooperation of the two states. In the 2007 Water Resources Development Act, the U.S. Congress passed legislation that instructed the Corps to release the easement once both states have reached a mutually acceptable governing structure¹⁶.

(a) In General. The Secretary shall determine the feasibility of carrying out projects—

- (1) to improve the Savannah River for navigation and related purposes that may be necessary to support the location of container cargo and other port facilities to be located in Jasper County, South Carolina, in the vicinity of Mile 6 of the Savannah Harbor entrance channel; and
- (2) to remove from the proposed Jasper County port site the easements used by the Corps of Engineers for placement of dredged fill materials for the Savannah Harbor Federal navigation project.

(b) Factors for Consideration. In making a determination under subsection

(a), the Secretary shall take into consideration—

- (1) landside infrastructure;
- (2) the provision of any additional dredged material disposal area as a consequence of removing from the proposed Jasper County port site the easements used by the Corps of Engineers for placement of dredged fill materials for the Savannah Harbor Federal navigation project; and
- (3) the results of the proposed bi-state compact between the State of Georgia and the State of South Carolina to own, develop, and operate port facilities at the proposed Jasper County port site, as described in the term sheet executed by the Governor of the State of Georgia and the Governor of the State of South Carolina on March 12, 2007.



The Corps also will work with the Joint Project Office on issues of environmental mitigation and permitting. As part of the attempt to curb the impact from the transportation corridor, mitigation credits will be purchased and applied in accordance with existing Corps protocol.

Why will it take 14 years to get the Jasper Ocean Terminal online?

As with any port project, there is a considerable amount of time needed to evaluate the feasibility of a targeted site, understand potential environmental impacts and secure the necessary permits needed to move ahead with construction. Much work has already been done, but the Joint Project Office has been notified by the U.S. Army Corps of Engineers to expect an eight-year

¹⁶ 2007 Water Resources Development Act

permitting process, as well as two additional years for final design and three years for construction.

In the wake of Hurricane Katrina, the Corps requires additional analysis and reviews to help verify the integrity of the project and its impact on the environment. As part of this process, an independent third-party will conduct its own site analysis and project review to determine if the project can move forward.

These processes, while lengthy, are essential and part of the protocol that accompanies the development of any port.

Would a smaller, non-container terminal be a viable alternative?

Developing a port that specialized in smaller cargo (i.e. bulk goods, liquids) has been proposed as a faster alternative. However, the permitting and infrastructure needs for a smaller port are nearly identical to the proposed container terminal. For instance, it would still take eight years to permit a smaller port. While the time taken to construct the terminal and conduct environmental mitigation could conceivably be shorter, significant investments associated with permitting and infrastructure development remain.

Furthermore, in order for the Corps to agree to release the easements, the project must pass a host of stringent environmental and economic hurdles that a smaller port is not likely to pass. In recent years, smaller ports that focus on non-container cargo, such as Port Royal, have struggled financially in the two-state region.



Container terminals offer the highest return on investment, which is crucial given the significant capital costs of such a project. In Jasper Ocean Terminal's case, it is doubtful a smaller port would generate enough revenue to justify the necessary infrastructure and permitting costs.

Why containers?

The decision to plan an international deep water container port at the Jasper site was based on an extensive study of global shipping trends. Traditional industries, including foodstuffs manufacturers, pulp and paper companies and mineral industries also are moving aggressively toward greater containerization, and have critical mass in both Georgia and

South Carolina.

With both Charleston and Garden City expecting to run out of container capacity by 2025, expanding the container business at Jasper to the benefit of both authorities makes strategic and economic sense. The return on investment from a container operation is more consistent and higher than from any other type of shipping, allowing for a quicker pay-off for the extensive infrastructure cost. Given the high expenses associated with the off-site infrastructure, as well as the length of time required to obtain a permit, it is necessary that a long-term investment be made in a container terminal that supports Southeastern exports and imports.

Without the additional capacity provided by the Jasper Ocean Terminal, both authorities fear congestion at their existing terminals. Meanwhile, investments at competitive ports in Norfolk, Jacksonville and elsewhere will begin to draw container market share. Focusing on container shipping at the Jasper Ocean Terminal allows both states to preserve their leadership in the container industry, maximize their investments at existing facilities in Charleston and Savannah, and allows time to permit and build the terminal of the future in Jasper County.

What is the projected economic impact of the Jasper Ocean Terminal?

The Jasper Ocean Terminal has the potential to create one million jobs in Georgia and South Carolina and generate more than

\$9 billion in tax revenue for the two states²². With the coming investments in road and rail infrastructure, Jasper County, as well as neighboring Beaufort, Hampton, Allendale and Colleton counties, are positioned to attract complementary industries such as distribution centers and cargo storage that will actualize the immediate economic potential for the community.

More than 900 direct and indirect jobs will be created through the construction of the Jasper Ocean Terminal with more than \$210 million in wages generated²³. It is expected that these projects would begin in 2020, creating more near-term impact.

How strong is your economic data?

The Joint Project Office is confident in the existing economic evidence it has for the project. The economic data, compiled in 2010, is drawn from multiple credible sources, including studies conducted by the University of Georgia, Wilbur Smith & Associates and Moffatt & Nichol.

As we develop additional information about the cost of the construction project, we will periodically commission studies to update our projections.

What does SHEP have to do with the Jasper Ocean Terminal?

SHEP is sponsored by the GPA to provide Post-Panamax access to the Garden City Terminal. It will provide two benefits to Jasper. First, the dredged material from the deepening will serve as the fill dirt for the new port, elevating the site above the flood plain and saving more than \$300 million in site preparation costs.

In addition, it will deepen the river to 48 feet to the Jasper Ocean Terminal from the harbor entrance, contributing to the ultimate depth for the terminal.

But, we're not at capacity yet, so why plan the Jasper Ocean Terminal now?

There are several reasons planning has begun and must continue.

First, it will take eight years (or more) to plan and permit a major ocean port, two more to design it and three to build it. As a result, any delay in moving ahead with the project subjects Georgia and South Carolina to losing market share when demand is at its greatest.



Also, the influx in trade is coming regardless. Emerging trade patterns from the Far East, strong export markets and population growth in the Southeastern U.S., the expansion of the Panama Canal and the increasing use of the Suez Canal as a trade route all point to increased shipping traffic on the East Coast. If forward-thinking action isn't taken now to accommodate this growth, that traffic will bypass our region and move elsewhere, putting our businesses and economy at a disadvantage.

How are you engaging the private sector?

Bringing the private sector into the Jasper Ocean Terminal is an important piece of its long-term success, and steps are being taken to identify viable private partners. It is not likely that federal or state money will cover the cost of the project, so Georgia and South Carolina may need additional capital to move forward.

Port leaders will look at all options for engaging the creativity and resources of the private sector in this project while preserving a structure that is efficient and effective for the terminal. As well as its indirect impact on the economy, the port will generate a positive return on investment. Because of this, it will be appealing to potential investors and will be able to attract private capital if needed.

²² University of Georgia; Wilbur Smith & Associates; Moffatt & Nichol.

²³ Moffatt & Nichol.

One option is the signing of long-term leases with shipping companies.

Can Georgia and South Carolina cooperate?

The boards of both ports authorities and the board of the Joint Project Office, which manages the Jasper Ocean Terminal, are committed to a container port at the site.

As noted earlier, success in Charleston and Savannah are pre-conditions for success in Jasper County. By working collaboratively on the Jasper Ocean Terminal, the two states will position their coasts as a global hub for trade, reap tremendous economic benefits and lay the foundation for future regional projects that will better serve their citizens and the entire region.





The Joint Project Office

Board of Directors

Dave Posek, Chair, Pawleys Island
Jim Balloun, Vice-Chair, Atlanta


Bill Bethea, Hilton Head Island
Steve Green, Savannah
Alec Poitevin, Bainbridge
Bill Stern, Columbia

Ex-Officio Members

Curtis Foltz, GPA, CEO
Ted Pitts, Columbia
Jim Lientz, Atlanta
Jim Newsome, SCSA, CEO

Doug Marchand, Executive Advisor



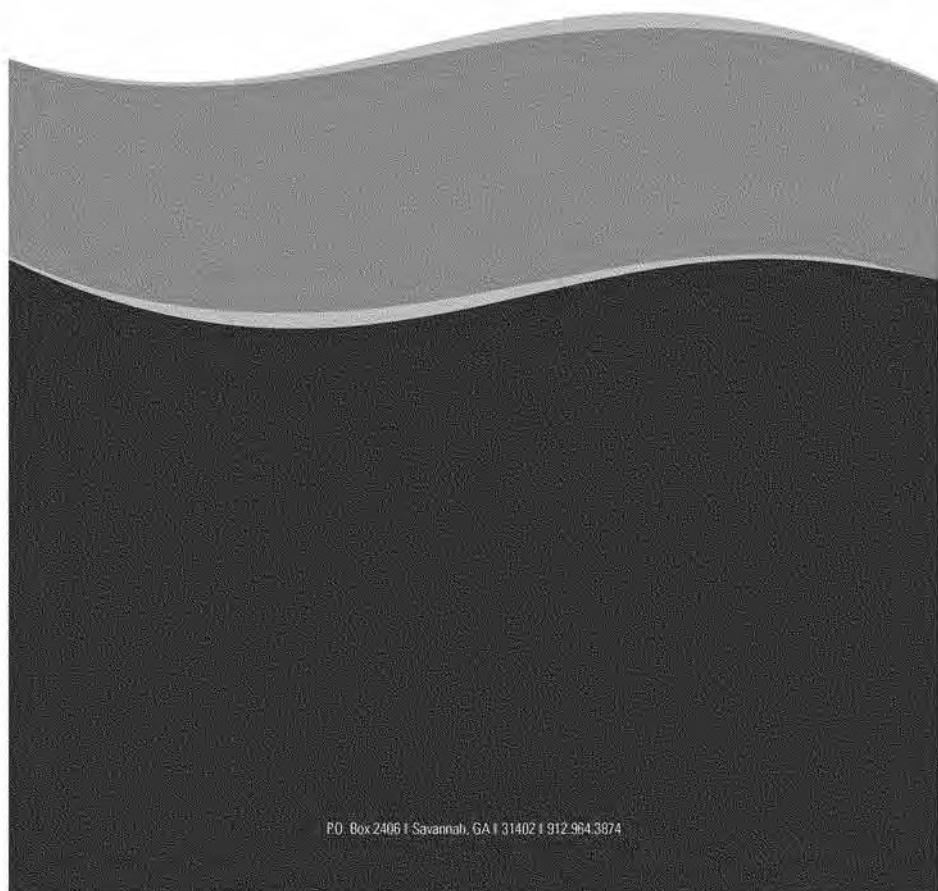

P.O. Box 2406 | Savannah, GA | 31402 | 912.964.3874

BOARD:
Allen Ansler
Chairman
Mark S. Lutz
Vice Chairman
Steven G. Kline
Secretary



C. Earl Hunter, Commissioner

Promoting and protecting the health of the public and the environment

Board of Health and Environmental Control; Telephone (803) 898-3309 Fax: (803) 898-3393

BOARD:
R. Kenyon Wells
L. Clarence Bates, Jr.
Ann B. Kline, DDS
John O. Hallio, Sr., MD

November 15, 2011

U.S. Mail – Certified and Electronic Mail

91 7108 2133 3938 7370 5664

Keith Klein, Acting District Counsel
US Army Corp of Engineers, Savannah District
100 East Oglethorpe Avenue
Savannah, GA 31402
Keith.J.Klein@usace.army.mil

91 7108 2133 3938 7370 5671

Susan H. Richardson, Esq.
Kilpatrick Townsend
Suite 2800 1100 Peachtree Street
Atlanta, GA 30309-4528
srichardson@kilpatricktownsend.com

Via Electronic Mail

John Harleston, Esq.
SCDHEC – Office of General Counsel
2600 Bull Street
Columbia, SC 29201
harlesi@dhec.sc.gov

RE: ***Final Review Conference – Docket No. 11-RFR-52 – Decision dated September 30, 2011, to deny a 401 Water Quality Certification and objection to the Federal Consistency Determination under the Coastal Zone Management Act.***

Dear Counsel:

Please find enclosed the Final Agency Decision in the above referenced matter.

Sincerely,

Lisa Lucas Longshore
Clerk

**IN THE STATE OF SOUTH CAROLINA
BEFORE THE BOARD OF HEALTH AND ENVIRONMENTAL CONTROL
FINAL AGENCY DECISION**

IN RE: Savannah Harbor Expansion Project (SHEP)

Board Docket Number 11-RFR-52

Appearances:

Col. Jeffrey M. Hall, for Requestor US Army Corps of Engineers

Curtis Foltz, for Requestor Georgia Ports Authority

John Harleston, Esq. for South Carolina Department of Health & Environmental Control

This Final Agency Decision is issued with the consent of the Department of Health and Environmental Control staff (DHEC), the US Army Corps of Engineers (COE), and the Georgia Ports Authority (GPA) to resolve the Requests for Review presented herein regarding the Savannah Harbor Expansion Project.

DHEC staff denied COE's request for certification from DHEC under Section 401 of the Clean Water Act and for concurrence from DHEC with COE's consistency determination under the federal Coastal Zone Management Act for the Savannah Harbor Expansion Project ("the Project"). COE and GPA requested review by the Board of the staff decisions and a final review conference was scheduled before the Board at its November 10, 2011 meeting. At the conference, it was stated that DHEC staff and the Requestors, COE and GPA, reached an agreement that resolves the disputed issues among them concerning the Project, and presented the agreement to the Board for approval.

The Board finds that the agreement is consistent with the laws of the State of South Carolina and that the applicant COE is entitled to the requested approvals. The Board adopts the agreement of DHEC staff, COE, and GPA as the Final Agency Decision.

FINDINGS OF FACT

The Savannah District of the United States Army Corps of Engineers (COE) proposes to deepen the Savannah Harbor navigational channel. The Project will involve dredging the Savannah Harbor navigational channel in the Savannah River which forms the boundary between the State of Georgia and the State of South Carolina. The COE requests Section 401 Water Quality Certifications from the Georgia Department of Natural Resources (Georgia DNR) and from the South Carolina Department of Health and Environmental Control and seeks concurrence from Georgia DNR and DHEC that the Project is consistent with the States' Coastal Zone Management Programs.

On November 15, 2010, COE issued a Joint Public Notice for the Project which served as an application to DHEC for a Section 401 Water Quality Certification and Coastal Zone Management consistency determination. On January 25 and 31, 2011, DHEC's Office of Ocean and Coastal Resource Management issued letters objecting to COE's determination that the project is fully consistent with the South Carolina Coastal Tidelands and Wetlands Act and the Coastal Zone Management Program. On September 30, 2011, DHEC issued a letter reiterating that position. On September 30, 2011, DHEC also issued a Notice of Department Decision proposing to deny the application for a Section 401 Water Quality Certification.

On October 7, 2011, COE filed a timely Request for Final Review of both the proposed denial of the Section 401 Water Quality Certification and the finding that the project was not consistent with the South Carolina Coastal Tidelands and Wetlands Act and the Coastal Zone

Management Program. GPA also filed a timely Request for Review of both staff decisions. On November 3, 2011, the South Carolina Coastal Conservation League, South Carolina Wildlife Federation, and Savannah Riverkeeper filed a motion to intervene, which the Board denied.

CONCLUSIONS OF LAW

DHEC has authority under Section 401 of the Clean Water Act, 33 USC §1341, the S.C. Pollution Control Act, S.C. Code Ann. §§48-1-10, et seq., and S.C. Code R.61-101 to grant and deny certifications of projects affecting waters of the State. DHEC also has authority to certify projects affecting the Coastal Zone for consistency with the Coastal Management Program under the federal Coastal Zone Management Act, 16 U.S.C. §§1451, et seq., and South Carolina Coastal Tidelands and Wetlands Act, S.C. Code Ann. §§48-39-10, et seq. Subject to the conditions of this agreement, the Board concludes that DHEC has reasonable assurance that the Project will comply with South Carolina water quality standards, and that the Project is consistent with enforceable provisions of the Coastal Management Program.

IT IS THE FINAL AGENCY DECISION OF THE BOARD, WITH THE CONSENT OF THE PARTIES, that:

1. COE will commit to operation of the Dissolved Oxygen system as stated in the letter from Col. Jeffrey M. Hall of November 4, 2011, specifically:

First, the project Record of Decision will expressly recognize a binding commitment to install, operate, and maintain the DO system in accordance with the project mitigation plan, subject to Congressional appropriation of funds for the project. Second, the Savannah District will make the DO system a top priority for annual operation and maintenance (O&M) funds appropriated and received for the project, above normal maintenance requirements.

2. The GPA will provide financial assurance, in a manner acceptable to DHEC, that it will fund operation and maintenance of the Dissolved Oxygen system in any year that sufficient

federal funds for the operation and maintenance of the system are not made available. This obligation extends for the life of the project (50 years). Such financial assurance may be achieved through a Standby Trust Fund, Surety Bond, Letter of Credit, Insurance, or other means deemed acceptable to DHEC. The GPA will provide the financial assurance before any dredging begins. For purposes of the COE, this offer and commitment by GPA to provide financial assurance does not constitute an item of local cooperation or cost-shared feature.

3. To address DHEC concerns about the sufficiency of mitigation for potential impacts on salt marsh, the State of Georgia agrees to transfer salt marsh to the State of South Carolina to maintain as a marsh or for the State of Georgia to preserve as marsh in perpetuity and from development an amount of acreage of salt marsh in South Carolina equivalent to 2,200 mitigation credits (generally 1,690 acres) as part of its Environmental Sustainability Program. For purposes of the COE, this offer and commitment by GPA to transfer salt marsh does not constitute an item of local cooperation or cost-shared feature.

4. COE shall comply with all terms and conditions in the National Marine Fisheries Service Final Biological Opinion.

5. To ensure protection of cultural resources, DHEC must receive an executed Programmatic Agreement for Cultural Resources signed by COE and the South Carolina Historic Preservation Office.

6. To ensure that the levels of environmental effects predicted in the Environmental Impact Statement (EIS) are not exceeded, COE will comply with the Monitoring and Adaptive Management Plan provided as Appendix D of the EIS. The Monitoring and Adaptive Management Plan will ensure the accuracy of the predicted environmental impacts, assess the effectiveness of the mitigation features, and provide for modification of the Project as needed.

7. The attached 401 certification and concurrence with COE's Coastal Management Plan consistency determination are hereby issued.
8. COE agrees that no Project dredging will begin until compliance with these conditions, and specifically that no dredging will begin until the provision by the Georgia Ports Authority of the financial assurance required above.
9. The GPA represents and agrees that it has authority to execute this agreement on behalf of itself and the State of Georgia, with regard to their respective obligations, and that its consent to this agreement fully binds the GPA and the State of Georgia to the terms of this agreement.
10. COE and the GPA acknowledge that this agreement is legally binding and DHEC may enforce their respective obligations assumed herein as necessary and appropriate in a court of law with jurisdiction.
11. Neither COE nor the GPA admits that the project as described in the Environmental Impact Statement was or is not in compliance with the requirements of the 2008 Mitigation Rule or any other applicable requirements for mitigation. The GPA and the State of Georgia agree to the additional measures required above in order to facilitate settlement of the disputes among the parties and to alleviate DHEC concerns regarding the environmental effects of the Project. DHEC understands that the COE may not include these additional measures in the Final EIS or ROD for the Project.



Allen Amisler
Chairman
Board of Health and Environmental Control
For the Board

11/15

, 2011

CONSENTED TO AND AGREED BY:


John Harleston
Attorney for DHEC, Respondent

11/15/11
Date


Jeffrey M. Hall, Col, US Army
For COE, Requestor

15 Nov, 2011
Date


Curtis Foltz
For GPA, Requestor

11/15/11
Date

BOARD:
Paul C. Aughtery, III
Chairman
Edwin H. Cooper, III
Vice Chairman
Steven G. Kaiser
Secretary



C. Earl Hunter, Commissioner

Promoting and protecting the health of the public and the environment

BOARD:
Henry C. Hunt
McDavid Mitchell, MD
Glenn A. McCall
Coleman E. Buckhouse, MD

November 15, 2011

US Army Corps of Engineers
PO Box 889
Savannah GA 31402-0889

Re: Certification in Accordance with Section 401 of the Clean Water Act, as amended.

US Army Corps of Engineers
Savannah Harbor Expansion Project
Savannah River
Jasper County
P/N 2010 SHEP

Dear Sir,

The Bureau of Water of the South Carolina Department of Health and Environmental Control (Department) has reviewed plans for this project and determined that there is a reasonable assurance that the proposed project will be conducted in a manner consistent with the Certification requirements of Section 401 of the Federal Clean Water Act, as amended, and the permitting requirements of R. 19-450 et. seq., 1976 SC Code of Laws.

The Department issued a Notice of Department Decision proposing to deny the Certification for this project on September 30, 2011. Timely requests for review were filed with the Board of Health and Environmental Control by the US Army Corps of Engineers – Savannah District and the Georgia Ports Authority in accordance with S.C. Code Section 44-1-60. Subsequent to the filing of the requests for review, the Department and the parties entered into negotiations towards a settlement. The parties reached an agreement and the DHEC Board adopted the agreement on November 10, 2011, authorizing issuance of this certification on terms consistent with the agreement.

In accordance with the provisions of Section 401, we certify that this project, subject to the indicated conditions, is consistent with applicable provisions of Section 303 of the Federal Clean Water Act, as amended. We also hereby certify that there are no applicable effluent limitations under Sections 301(b) and 302, and that there are no applicable standards under Sections 306 and 307.

This certification is subject to the following conditions:

1. The project must comply with the terms and conditions of the Final Agency Decision of the Board of Health and Environmental Control signed on November 15, 2011.
2. The project must comply with the terms and conditions of the Water Quality Certification issued on February 16, 2011, by the Georgia Department of Natural Resources.

Page: 2
Us Army Corps Of Engineers
November 15, 2011

The Department reserves the right to impose additional conditions on this Certification to respond to unforeseen, specific problems that may arise and to take any enforcement action necessary to ensure compliance with State water quality standards.

Sincerely,

A handwritten signature in black ink, appearing to read "Heather Preston", with a long horizontal flourish extending to the right.

Heather Preston, Director
Division of Water Quality
Bureau of Water

cc: U.S. Army Corps of Engineers,
Charleston District Office
SC DHEC, Beaufort EQC Office District Office
SC DHEC, OCRM



G. Earl Hunter, Commissioner

Promoting and protecting the health of the public and the environment

November 15, 2011

Colonel Jeffrey M. Hall, District Commander
U.S. Army Corps of Engineers, Savannah District
P.O. Box 889
Savannah, Georgia 31402-0889

Re: Savannah Harbor Expansion Project (SHEP) – Federal Consistency
Determination

Dear Colonel Hall:

Based on the executed consent agreement entered into by SCDHEC, US Army Corps of Engineers and the State of Georgia, SCDHEC-OCRM removes its objection to the Corps finding of Consistency for the SHEP.

Sincerely,

Carolyn Boltin-Kelly, Deputy Commissioner
SCDHEC- Office of Ocean and Coastal Resource Management

cc: Earl Hunter, Commissioner, SCDHEC

SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL

Ocean and Coastal Resource Management

Charleston Office • 1362 McMillan Avenue • Suite 400 • Charleston, SC 29405

Phone: (843) 744-5898 • Fax: (843) 744-5847 • www.scdhec.gov

FOR CONTINUATION OF HOUSE DOCUMENT 112-153

**SAVANNAH HARBOR EXPANSION PROJECT
CHATMAN CO., GEORGIA & JASPER CO., S. CAROLINA:
FINAL GENERAL RE-EVALUATION REPORT AND
ENVIRONMENTAL IMPACT STATEMENT**

SEE PART 15