



CODE OF FEDERAL REGULATIONS

Title 40

Protection of Environment

Parts 82 to 84

Revised as of July 1, 2024

Containing a codification of documents
of general applicability and future effect

As of July 1, 2024

Published by the Office of the Federal Register
National Archives and Records Administration
as a Special Edition of the Federal Register

U.S. GOVERNMENT OFFICIAL EDITION NOTICE



Legal Status and Use of Seals and Logos

The seal of the National Archives and Records Administration (NARA) authenticates the Code of Federal Regulations (CFR) as the official codification of Federal regulations established under the Federal Register Act. Under the provisions of 44 U.S.C. 1507, the contents of the CFR, a special edition of the Federal Register, shall be judicially noticed. The CFR is prima facie evidence of the original documents published in the Federal Register (44 U.S.C. 1510).

It is prohibited to use NARA's official seal and the stylized Code of Federal Regulations logo on any republication of this material without the express, written permission of the Archivist of the United States or the Archivist's designee. Any person using NARA's official seals and logos in a manner inconsistent with the provisions of 36 CFR part 1200 is subject to the penalties specified in 18 U.S.C. 506, 701, and 1017.

Use of ISBN Prefix

This is the Official U.S. Government edition of this publication and is herein identified to certify its authenticity. Use of the 0-16 ISBN prefix is for U.S. Government Publishing Office Official Editions only. The Superintendent of Documents of the U.S. Government Publishing Office requests that any reprinted edition clearly be labeled as a copy of the authentic work with a new ISBN.



U.S. GOVERNMENT PUBLISHING OFFICE

U.S. Superintendent of Documents • Washington, DC 20402-0001

<http://bookstore.gpo.gov>

Phone: toll-free (866) 512-1800; DC area (202) 512-1800

Table of Contents

Explanation	<i>Page</i> v
Title 40:	
Chapter I—Environmental Protection Agency (Continued)	3
Finding Aids:	
Table of CFR Titles and Chapters	441
Alphabetical List of Agencies Appearing in the CFR	461
List of CFR Sections Affected	471

Cite this Code: CFR

*To cite the regulations in
this volume use title,
part and section num-
ber. Thus, 40 CFR 82.1
refers to title 40, part
82, section 1.*

Explanation

The Code of Federal Regulations is a codification of the general and permanent rules published in the Federal Register by the Executive departments and agencies of the Federal Government. The Code is divided into 50 titles which represent broad areas subject to Federal regulation. Each title is divided into chapters which usually bear the name of the issuing agency. Each chapter is further subdivided into parts covering specific regulatory areas.

Each volume of the Code is revised at least once each calendar year and issued on a quarterly basis approximately as follows:

Title 1 through Title 16.....	as of January 1
Title 17 through Title 27.....	as of April 1
Title 28 through Title 41.....	as of July 1
Title 42 through Title 50.....	as of October 1

The appropriate revision date is printed on the cover of each volume.

LEGAL STATUS

The contents of the Federal Register are required to be judicially noticed (44 U.S.C. 1507). The Code of Federal Regulations is prima facie evidence of the text of the original documents (44 U.S.C. 1510).

HOW TO USE THE CODE OF FEDERAL REGULATIONS

The Code of Federal Regulations is kept up to date by the individual issues of the Federal Register. These two publications must be used together to determine the latest version of any given rule.

To determine whether a Code volume has been amended since its revision date (in this case, July 1, 2024), consult the “List of CFR Sections Affected (LSA),” which is issued monthly, and the “Cumulative List of Parts Affected,” which appears in the Reader Aids section of the daily Federal Register. These two lists will identify the Federal Register page number of the latest amendment of any given rule.

EFFECTIVE AND EXPIRATION DATES

Each volume of the Code contains amendments published in the Federal Register since the last revision of that volume of the Code. Source citations for the regulations are referred to by volume number and page number of the Federal Register and date of publication. Publication dates and effective dates are usually not the same and care must be exercised by the user in determining the actual effective date. In instances where the effective date is beyond the cut-off date for the Code a note has been inserted to reflect the future effective date. In those instances where a regulation published in the Federal Register states a date certain for expiration, an appropriate note will be inserted following the text.

OMB CONTROL NUMBERS

The Paperwork Reduction Act of 1980 (Pub. L. 96-511) requires Federal agencies to display an OMB control number with their information collection request.

Many agencies have begun publishing numerous OMB control numbers as amendments to existing regulations in the CFR. These OMB numbers are placed as close as possible to the applicable recordkeeping or reporting requirements.

PAST PROVISIONS OF THE CODE

Provisions of the Code that are no longer in force and effect as of the revision date stated on the cover of each volume are not carried. Code users may find the text of provisions in effect on any given date in the past by using the appropriate List of CFR Sections Affected (LSA). For the convenience of the reader, a “List of CFR Sections Affected” is published at the end of each CFR volume. For changes to the Code prior to the LSA listings at the end of the volume, consult previous annual editions of the LSA. For changes to the Code prior to 2001, consult the List of CFR Sections Affected compilations, published for 1949-1963, 1964-1972, 1973-1985, and 1986-2000.

“[RESERVED]” TERMINOLOGY

The term “[Reserved]” is used as a place holder within the Code of Federal Regulations. An agency may add regulatory information at a “[Reserved]” location at any time. Occasionally “[Reserved]” is used editorially to indicate that a portion of the CFR was left vacant and not dropped in error.

INCORPORATION BY REFERENCE

What is incorporation by reference? Incorporation by reference was established by statute and allows Federal agencies to meet the requirement to publish regulations in the Federal Register by referring to materials already published elsewhere. For an incorporation to be valid, the Director of the Federal Register must approve it. The legal effect of incorporation by reference is that the material is treated as if it were published in full in the Federal Register (5 U.S.C. 552(a)). This material, like any other properly issued regulation, has the force of law.

What is a proper incorporation by reference? The Director of the Federal Register will approve an incorporation by reference only when the requirements of 1 CFR part 51 are met. Some of the elements on which approval is based are:

- (a) The incorporation will substantially reduce the volume of material published in the Federal Register.
- (b) The matter incorporated is in fact available to the extent necessary to afford fairness and uniformity in the administrative process.
- (c) The incorporating document is drafted and submitted for publication in accordance with 1 CFR part 51.

What if the material incorporated by reference cannot be found? If you have any problem locating or obtaining a copy of material listed as an approved incorporation by reference, please contact the agency that issued the regulation containing that incorporation. If, after contacting the agency, you find the material is not available, please notify the Director of the Federal Register, National Archives and Records Administration, 8601 Adelphi Road, College Park, MD 20740-6001, or call 202-741-6010.

CFR INDEXES AND TABULAR GUIDES

A subject index to the Code of Federal Regulations is contained in a separate volume, revised annually as of January 1, entitled CFR INDEX AND FINDING AIDS. This volume contains the Parallel Table of Authorities and Rules. A list of CFR titles, chapters, subchapters, and parts and an alphabetical list of agencies publishing in the CFR are also included in this volume.

An index to the text of “Title 3—The President” is carried within that volume.

The Federal Register Index is issued monthly in cumulative form. This index is based on a consolidation of the “Contents” entries in the daily Federal Register.

A List of CFR Sections Affected (LSA) is published monthly, keyed to the revision dates of the 50 CFR titles.

REPUBLICATION OF MATERIAL

There are no restrictions on the republication of material appearing in the Code of Federal Regulations.

INQUIRIES

For a legal interpretation or explanation of any regulation in this volume, contact the issuing agency. The issuing agency’s name appears at the top of odd-numbered pages.

For inquiries concerning CFR reference assistance, call 202-741-6000 or write to the Director, Office of the Federal Register, National Archives and Records Administration, 8601 Adelphi Road, College Park, MD 20740-6001 or e-mail fedreg.info@nara.gov.

SALES

The Government Publishing Office (GPO) processes all sales and distribution of the CFR. For payment by credit card, call toll-free, 866-512-1800, or DC area, 202-512-1800, M-F 8 a.m. to 4 p.m. e.s.t. or fax your order to 202-512-2104, 24 hours a day. For payment by check, write to: US Government Publishing Office – New Orders, P.O. Box 979050, St. Louis, MO 63197-9000.

ELECTRONIC SERVICES

The full text of the Code of Federal Regulations, the LSA (List of CFR Sections Affected), The United States Government Manual, the Federal Register, Public Laws, Public Papers of the Presidents of the United States, Compilation of Presidential Documents and the Privacy Act Compilation are available in electronic format via www.govinfo.gov. For more information, contact the GPO Customer Contact Center, U.S. Government Publishing Office. Phone 202-512-1800, or 866-512-1800 (toll-free). E-mail, ContactCenter@gpo.gov.

The Office of the Federal Register also offers a free service on the National Archives and Records Administration’s (NARA) website for public law numbers, Federal Register finding aids, and related information. Connect to NARA’s website at www.archives.gov/federal-register.

The eCFR is a regularly updated, unofficial editorial compilation of CFR material and Federal Register amendments, produced by the Office of the Federal Register and the Government Publishing Office. It is available at www.ecfr.gov.

OLIVER A. POTTS,
Director,
Office of the Federal Register
July 1, 2024

THIS TITLE

Title 40—PROTECTION OF ENVIRONMENT is composed of thirty-seven volumes. The parts in these volumes are arranged in the following order: Parts 1–49, parts 50–51, part 52 (52.01–52.1018), part 52 (52.1019–52.2019), part 52 (52.2020–end of part 52), parts 53–59, part 60 (60.1–60.499), part 60 (60.500–end of part 60, sections), part 60 (Appendices), parts 61–62, part 63 (63.1–63.599), part 63 (63.600–63.1199), part 63 (63.1200–63.1439), part 63 (63.1440–63.6175), part 63 (63.6580–63.8830), part 63 (63.8980–end of part 63), parts 64–71, parts 72–78, parts 79–80, part 81, parts 82–84, parts 85–96, parts 97–99, parts 100–135, parts 136–149, parts 150–189, parts 190–259, parts 260–265, parts 266–299, parts 300–399, parts 400–424, parts 425–699, parts 700–722, parts 723–789, parts 790–999, parts 1000–1059, and part 1060 to end. The contents of these volumes represent all current regulations codified under this title of the CFR as of July 1, 2024.

Chapter I—Environmental Protection Agency appears in all thirty-seven volumes. OMB control numbers for title 40 appear in §9.1 of this chapter.

Chapters IV–IX—Regulations issued by the Environmental Protection Agency and Department of Justice, Council on Environmental Quality, Chemical Safety and Hazard Investigation Board, Environmental Protection Agency and Department of Defense; Uniform National Discharge Standards for Vessels of the Armed Forces, Gulf Coast Ecosystem Restoration Council, and the Federal Permitting Improvement Steering Council appear in volume thirty-seven.

For this volume, Tess Waroich was Chief Editor. The Code of Federal Regulations publication program is under the direction of John Hyrum Martinez, assisted by Stephen J. Frattini.

Title 40—Protection of Environment

(This book contains parts 82 to 84)

	<i>Part</i>
CHAPTER I—Environmental Protection Agency (Continued)	82

CHAPTER I—ENVIRONMENTAL PROTECTION AGENCY (CONTINUED)

EDITORIAL NOTE: Nomenclature changes to chapter I appear at 65 FR 47324, 47325, Aug. 2, 2000; 66 FR 34375, 34376, June 28, 2001.

SUBCHAPTER C—AIR PROGRAMS (CONTINUED)

<i>Part</i>		<i>Page</i>
82	Protection of stratospheric ozone	5
83	[Reserved]	
84	Phasedown of hydrofluorocarbons	384

SUBCHAPTER C—AIR PROGRAMS (CONTINUED)

PART 82—PROTECTION OF STRATOSPHERIC OZONE

Subpart A—Production and Consumption Controls

Sec.

- 82.1 Purpose and scope.
 - 82.2 [Reserved]
 - 82.3 Definitions for class I and class II controlled substances.
 - 82.4 Prohibitions for class I controlled substances.
 - 82.5 Apportionment of baseline production allowances for class I controlled substances.
 - 82.6 Apportionment of baseline consumption allowances for class I controlled substances.
 - 82.7 Grant and phase reduction of baseline production and consumption allowances for class I controlled substances.
 - 82.8 Grant of essential use allowances and critical use allowances.
 - 82.9 Availability of production allowances in addition to baseline production allowances for class I controlled substances.
 - 82.10 [Reserved]
 - 82.11 Exports of class I controlled substances to Article 5 Parties.
 - 82.12 Transfers of allowances for class I controlled substances.
 - 82.13 Recordkeeping and reporting requirements for class I controlled substances.
 - 82.14 Process for electronic reporting.
 - 82.15 Prohibitions for class II controlled substances.
 - 82.16 Phaseout schedule of class II controlled substances.
 - 82.17 Apportionment of baseline production allowances for class II controlled substances.
 - 82.18 Availability of production in addition to baseline production allowances for class II controlled substances.
 - 82.19 Apportionment of baseline consumption allowances for class II controlled substances.
 - 82.20 Availability of consumption allowances in addition to baseline consumption allowances for class II controlled substances.
 - 82.21–82.22 [Reserved]
 - 82.23 Transfers of allowances of class II controlled substances.
 - 82.24 Recordkeeping and reporting requirements for class II controlled substances.
- APPENDIX A TO SUBPART A OF PART 82—CLASS I CONTROLLED SUBSTANCES
- APPENDIX B TO SUBPART A OF PART 82—CLASS II CONTROLLED SUBSTANCES

APPENDIX C TO SUBPART A OF PART 82 [RESERVED]

APPENDIX D TO SUBPART A OF PART 82—HARMONIZED TARIFF SCHEDULE DESCRIPTION OF PRODUCTS THAT MAY CONTAIN CONTROLLED SUBSTANCES IN APPENDIX A, CLASS I, GROUPS I AND II

APPENDIX E TO SUBPART A OF PART 82—ARTICLE 5 PARTIES

APPENDIX F TO SUBPART A OF PART 82—LISTING OF OZONE-DEPLETING CHEMICALS

APPENDIX G TO SUBPART A OF PART 82—UNEP RECOMMENDATIONS FOR CONDITIONS APPLIED TO EXEMPTION FOR ESSENTIAL LABORATORY AND ANALYTICAL USES

APPENDIX H TO SUBPART A OF PART 82—CLEAN AIR ACT AMENDMENTS OF 1990 PHASEOUT SCHEDULE FOR PRODUCTION OF OZONE-DEPLETING SUBSTANCES

APPENDIX I TO SUBPART A OF PART 82—GLOBAL WARMING POTENTIALS (MASS BASIS), REFERENCED TO THE ABSOLUTE GWP FOR THE ADOPTED CARBON CYCLE MODEL CO₂ DECAY RESPONSE AND FUTURE CO₂ ATMOSPHERIC CONCENTRATIONS HELD CONSTANT AT CURRENT LEVELS. (ONLY DIRECT EFFECTS ARE CONSIDERED.)

APPENDIX J TO SUBPART A OF PART 82—PARTIES TO THE MONTREAL PROTOCOL CLASSIFIED UNDER ARTICLE 5(1) THAT HAVE BANNED THE IMPORT OF CONTROLLED PRODUCTS THAT RELY ON CLASS I CONTROLLED SUBSTANCES FOR THEIR CONTINUING FUNCTIONING [RESERVED]

APPENDIX K TO SUBPART A OF PART 82—COMMODITY CODES FROM THE HARMONIZED TARIFF SCHEDULE FOR CONTROLLED SUBSTANCES AND USED CONTROLLED SUBSTANCES

APPENDIX L TO SUBPART A OF PART 82—APPROVED CRITICAL USES AND LIMITING CRITICAL CONDITIONS FOR THOSE USES

Subpart B—Servicing of Motor Vehicle Air Conditioners

- 82.30 Purpose and scope.
 - 82.31 Incorporation by reference.
 - 82.32 Definitions.
 - 82.34 Prohibitions and required practices.
 - 82.36 Approved refrigerant handling equipment.
 - 82.38 Approved independent standards testing organizations.
 - 82.40 Technician training and certification.
 - 82.42 Certification, recordkeeping and public notification requirements.
- APPENDIX A TO SUBPART B OF PART 82—STANDARD FOR RECYCLE/RECOVER EQUIPMENT
- APPENDIX B TO SUBPART B OF PART 82—STANDARD FOR RECOVER EQUIPMENT

APPENDIX C TO SUBPART B OF PART 82—SAE J2788 STANDARD FOR RECOVERY/RECYCLE AND RECOVERY/RECYCLE/RECHARGING EQUIPMENT FOR HFC-134a REFRIGERANT

APPENDIX D TO SUBPART B OF PART 82—SAE J2810 STANDARD FOR RECOVERY ONLY EQUIPMENT FOR HFC-134a REFRIGERANT

APPENDIX E TO SUBPART B OF PART 82—THE STANDARD FOR AUTOMOTIVE REFRIGERANT RECYCLING EQUIPMENT INTENDED FOR USE WITH BOTH CFC-12 AND HFC-134a

APPENDIX F TO SUBPART B OF PART 82—STANDARD FOR RECOVER-ONLY EQUIPMENT THAT EXTRACTS A SINGLE, SPECIFIC REFRIGERANT OTHER THAN CFC-12, HFC-134a, OR R-1234YF

Subpart C—Ban on Nonessential Products Containing Class I Substances and Ban on Nonessential Products Containing or Manufactured With Class II Substances

82.60 Purpose.

82.62 Definitions.

82.64 Prohibitions.

82.65 Temporary exemptions.

82.66 Nonessential Class I products and exceptions.

82.68 Verification and public notice requirements.

82.70 Nonessential Class II products and exceptions.

Subpart D—Federal Procurement

82.80 Purpose and scope.

82.82 Definitions.

82.84 Requirements.

82.86 Reporting requirements.

Subpart E—The Labeling of Products Using Ozone-Depleting Substances

82.100 Purpose.

82.102 Applicability.

82.104 Definitions.

82.106 Warning statement requirements.

82.108 Placement of warning statement.

82.110 Form of label bearing warning statement.

82.112 Removal of label bearing warning statement.

82.114 Compliance by manufacturers and importers with requirements for labeling of containers of controlled substances, or products containing controlled substances.

82.116 Compliance by manufacturers or importers incorporating products manufactured with controlled substances.

82.118 Compliance by wholesalers, distributors and retailers.

82.120 Petitions.

82.122 Certification, recordkeeping, and notice requirements.

82.124 Prohibitions.

Subpart F—Recycling and Emissions Reduction

82.150 Purpose and scope.

82.152 Definitions.

82.154 Prohibitions.

82.155 Safe disposal of appliances.

82.156 Proper evacuation of refrigerant from appliances.

82.157 Appliance maintenance and leak repair.

82.158 Standards for recovery and/or recycling equipment.

82.160 Approved equipment testing organizations.

82.161 Technician certification.

82.162 [Reserved]

82.164 Reclaimer certification.

82.166 Reporting and recordkeeping requirements for leak repair.

82.168 Incorporation by reference.

82.169 Suspension and revocation procedures.

APPENDIX A TO SUBPART F OF PART 82—SPECIFICATIONS FOR REFRIGERANTS

APPENDIX A1 TO SUBPART F OF PART 82—GENERIC MAXIMUM CONTAMINANT LEVELS

APPENDIX B1 TO SUBPART F OF PART 82—PERFORMANCE OF REFRIGERANT RECOVERY, RECYCLING AND/OR RECLAIM EQUIPMENT

APPENDIX B2 TO SUBPART F OF PART 82—PERFORMANCE OF REFRIGERANT RECOVERY, RECYCLING, AND/OR RECLAIM EQUIPMENT

APPENDIX B3 TO SUBPART F OF PART 82—PERFORMANCE OF REFRIGERANT RECOVERY, RECYCLING, AND/OR RECLAIM EQUIPMENT

APPENDIX B4 TO SUBPART F OF PART 82—PERFORMANCE AND SAFETY OF FLAMMABLE REFRIGERANT RECOVERY AND/OR RECYCLING EQUIPMENT

APPENDIX C TO SUBPART F OF PART 82—METHOD FOR TESTING RECOVERY DEVICES FOR USE WITH SMALL APPLIANCES

APPENDIX D TO SUBPART F OF PART 82—STANDARDS FOR BECOMING A CERTIFYING PROGRAM FOR TECHNICIANS

APPENDIX E TO SUBPART F OF PART 82—TEST PROCEDURE FOR LEAKS FROM CONTAINERS HOLDING TWO POUNDS OR LESS OF REFRIGERANT FOR USE IN AN MVAC

Subpart G—Significant New Alternatives Policy Program

82.170 Purpose and scope.

82.172 Definitions.

82.174 Prohibitions.

82.176 Applicability.

82.178 Information required to be submitted.

82.180 Agency review of SNAP submissions.

82.182 Confidentiality of data.

82.184 Petitions.

APPENDIX A TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES

Environmental Protection Agency

§ 82.1

APPENDIX B TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES

APPENDIX C TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES LISTED IN THE MAY 22, 1996 FINAL RULE, EFFECTIVE JUNE 21, 1996

APPENDIX D TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES

APPENDIX E TO SUBPART G OF PART 82—UNACCEPTABLE SUBSTITUTES LISTED IN THE JANUARY 26, 1999 FINAL RULE, EFFECTIVE JANUARY 26, 1999

APPENDIX F TO SUBPART G OF PART 82—UNACCEPTABLE SUBSTITUTES LISTED IN THE JANUARY 26, 1999 FINAL RULE, EFFECTIVE JANUARY 26, 1999

APPENDIX G TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES LISTED IN THE MARCH 3, 1999, FINAL RULE, EFFECTIVE APRIL 2, 1999

APPENDIX H TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES, EFFECTIVE MAY 28, 1999

APPENDIX I TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS, LISTED IN THE APRIL 26, 2000, FINAL RULE, EFFECTIVE MAY 26, 2000

APPENDIX J TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE JANUARY 29, 2002 FINAL RULE, EFFECTIVE APRIL 1, 2002

APPENDIX K TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES LISTED IN THE JULY 22, 2002, FINAL RULE, EFFECTIVE AUGUST 21, 2002

APPENDIX L TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE JANUARY 27, 2003, FINAL RULE, EFFECTIVE MARCH 28, 2003

APPENDIX M TO SUBPART G OF PART 82—UNACCEPTABLE SUBSTITUTES LISTED IN THE SEPTEMBER 30, 2004 FINAL RULE, EFFECTIVE NOVEMBER 29, 2004

APPENDIX N TO SUBPART G OF PART 82 [RESERVED]

APPENDIX O TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE SEPTEMBER 27, 2006 FINAL RULE, EFFECTIVE NOVEMBER 27, 2006

APPENDIX P TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE SEPTEMBER 27, 2006 FINAL RULE, EFFECTIVE NOVEMBER 27, 2006

APPENDIX Q TO SUBPART G OF PART 82—UNACCEPTABLE SUBSTITUTES LISTED IN THE MARCH 28, 2007 FINAL RULE, EFFECTIVE MAY 29, 2007

APPENDIX R TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS LISTED IN THE DECEMBER 20, 2011, FINAL RULE, EFFECTIVE FEBRUARY 21, 2012, AND IN THE APRIL 10, 2015 FINAL RULE, EFFECTIVE

MAY 11, 2015, AND IN THE APRIL 28, 2023 FINAL RULE, EFFECTIVE MAY 30, 2023

APPENDIX S TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE SEPTEMBER 19, 2012 FINAL RULE, EFFECTIVE DECEMBER 18, 2012.

APPENDIX T TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE APRIL 29, 2013 FINAL RULE, EFFECTIVE MAY 29, 2013.

APPENDIX U TO SUBPART G OF PART 82—UNACCEPTABLE SUBSTITUTES AND SUBSTITUTES SUBJECT TO USE RESTRICTIONS LISTED IN THE JULY 20, 2015 FINAL RULE, EFFECTIVE AUGUST 19, 2015

APPENDIX V TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES LISTED IN THE DECEMBER 1, 2016 FINAL RULE

APPENDIX W TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE MAY 6, 2021 FINAL RULE—EFFECTIVE JUNE 7, 2021

APPENDIX X TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE APRIL 28, 2023 FINAL RULE—EFFECTIVE MAY 30, 2023

APPENDIX Y TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE JUNE 13, 2024, FINAL RULE, EFFECTIVE JULY 15, 2024

Subpart H—Halon Emissions Reduction

82.250 Purpose and scope.

82.260 Definitions.

82.270 Prohibitions.

Subpart I—Ban on Refrigeration and Air-Conditioning Appliances Containing HCFCs

82.300 Purpose.

82.302 Definitions.

82.304 Prohibitions.

82.306 Prohibited products.

AUTHORITY: 42 U.S.C. 7414, 7601, 7671–7671q.

SOURCE: 57 FR 33787, July 30, 1992, unless otherwise noted.

Subpart A—Production and Consumption Controls

SOURCE: 60 FR 24986, May 10, 1995, unless otherwise noted.

§ 82.1 Purpose and scope.

(a) The purpose of the regulations in this subpart is to implement the Montreal Protocol on Substances that Deplete the Ozone Layer and sections 602, 603, 604, 605, 606, 607, 614 and 616 of the Clean Air Act Amendments of 1990, Public Law 101–549. The Protocol and section 604 impose limits on the production and consumption (defined as production plus imports minus exports,

§ 82.2

excluding transshipments and used controlled substances) of certain ozone-depleting substances, according to specified schedules. The Protocol also requires each nation that becomes a Party to the agreement to impose certain restrictions on trade in ozone-depleting substances with non-Parties.

(b) This subpart applies to any person that produces, transforms, destroys, imports or exports a controlled substance or imports or exports a controlled product.

[63 FR 41642, Aug. 4, 1998]

§ 82.2 [Reserved]

§ 82.3 Definitions for class I and class II controlled substances.

As used in this subpart, the term:

Administrator means the Administrator of the United States Environmental Protection Agency or his or her authorized representative. Starting May 18, 2020, reports and petitions that are available to be submitted through the Central Data Exchange, as well as any related supporting documents, must be submitted through that tool. Any other reports and communications shall be submitted to Stratospheric Protection Manager, 1200 Pennsylvania Ave. NW, Mail Code: 6205T, Washington, DC 20460.

Aircraft halon bottle means a vessel used as a component of an aircraft fire suppression system containing halon-1301 or halon-1211 approved under FAA rules for installation in a certificated aircraft.

Appliance means any device which contains and uses a refrigerant and which is used for household or commercial purposes, including any air conditioner, refrigerator, chiller, or freezer.

Applicator means the person who applies methyl bromide.

Approved critical use(s) means those uses of methyl bromide listed in Column A of appendix L to this subpart as further clarified in Columns B and C of that appendix.

Approved critical user(s) means a person who:

(1) For the applicable control period, applied to EPA for a critical use exemption or is a member of a consortium that applied to EPA for a critical use exemption for a use and location of

40 CFR Ch. I (7–1–24 Edition)

use that was included in the U.S. nomination, authorized by a Decision of the Parties to the Montreal Protocol, and then finally determined by EPA in a notice-and-comment rulemaking to be an approved critical use; and

(2) Has an area in the applicable location of use that requires methyl bromide fumigation because the person reasonably expects that the area will be subject to a limiting critical condition during the applicable control period.

Article 5 allowances means the allowances apportioned under §§ 82.9(a), 82.11(a)(2), and 82.18(a).

Baseline consumption allowances means the consumption allowances apportioned under §§ 82.6 and 82.19.

Baseline production allowances means the production allowances apportioned under §§ 82.5 and 82.17.

Beijing Amendments means the Montreal Protocol, as amended at the Eleventh Meeting of the Parties to the Montreal Protocol in Beijing in 1999.

Calculated level means the weighted amount of a controlled substance determined by multiplying the amount (in kilograms) of the controlled substance by that substance's ozone depletion potential (ODP) weight listed in appendix A or appendix B to this subpart.

Central Data Exchange means EPA's centralized electronic document receiving system, or its successors.

Class I refers to the controlled substances listed in appendix A to this subpart.

Class II refers to the controlled substances listed in appendix B to this subpart.

Commodity Owner, Shipper or their Agent means the person requesting that an applicator use methyl bromide for quarantine or preshipment applications.

Completely destroy means to cause the expiration of a controlled substance at a destruction efficiency of 98 percent or greater, using one of the destruction technologies approved by the Parties.

Confer means to shift the essential-use allowances obtained under § 82.8 from the holder of the unexpended essential-use allowances to a person for the production of a specified controlled substance.

Environmental Protection Agency

§ 82.3

Consortium means an organization representing a group of methyl bromide users that has collectively submitted an application for a critical use exemption on behalf of all members of the group. The members of a consortium shall be determined on the basis of the rules established by the organization. Members may either be required to formally join the consortium (e.g., by submitting an application or paying dues) or may automatically become members upon meeting particular criteria (e.g., a grower of a specific crop in a particular region).

Consumption means the production plus imports minus exports of a controlled substance (other than transshipments, or used controlled substances).

Consumption allowances means the privileges granted by this subpart to produce and import controlled substances; however, consumption allowances may be used to produce controlled substances only in conjunction with production allowances. A person's consumption allowances for class I substances are the total of the allowances obtained under §§ 82.6 and 82.7 as may be modified under § 82.12 (transfer of allowances). A person's consumption allowances for class II controlled substances are the total of the allowances obtained under §§ 82.19 and 82.20, as may be modified under § 82.23.

Control period means the period from January 1, 1992 through December 31, 1992, and each twelve-month period from January 1 through December 31, thereafter.

Controlled product means a product that contains a controlled substance listed as a Class I, Group I or II substance in appendix A to this subpart. Controlled products include, but are not limited to, those products listed in appendix D to this subpart.

Controlled products belong to one or more of the following six categories of products:

(1) Automobile and truck air conditioning units (whether incorporated in vehicles or not);

(2) Domestic and commercial refrigeration and air-conditioning/heat pump equipment (whether containing controlled substances as a refrigerant and/or in insulating material of the prod-

uct), e.g. Refrigerators, Freezers, Dehumidifiers, Water coolers, Ice machines, Air-conditioning and heat pump units;

(3) Aerosol products, except medical aerosols;

(4) Portable fire extinguishers;

(5) Insulation boards, panels and pipe covers;

(6) Pre-polymers.

Controlled substance means any substance listed in appendix A or appendix B to this subpart, whether existing alone or in a mixture, but excluding any such substance or mixture that is in a manufactured product other than a container used for the transportation or storage of the substance or mixture. Thus, any amount of a listed substance in appendix A or appendix B to this subpart that is not part of a use system containing the substance is a controlled substance. If a listed substance or mixture must first be transferred from a bulk container to another container, vessel, or piece of equipment in order to realize its intended use, the listed substance or mixture is a "controlled substance." The inadvertent or coincidental creation of insignificant quantities of a listed substance in appendix A or appendix B to this subpart; during a chemical manufacturing process, resulting from unreacted feedstock, from the listed substance's use as a process agent present as a trace quantity in the chemical substance being manufactured, or as an unintended byproduct of research and development applications, is not deemed a controlled substance. Controlled substances are divided into two classes, Class I in appendix A to this subpart, and Class II listed in appendix B to this subpart. Class I substances are further divided into eight groups, Group I, Group II, Group III, Group IV, Group V, Group VI, Group VII, and Group VIII, as set forth in appendix A to this subpart.

Copenhagen Amendments means the Montreal Protocol on Substances That Deplete the Ozone Layer, as amended at the Fourth Meeting of the Parties to the Montreal Protocol in Copenhagen in 1992.

Critical use means a circumstance in which the following two conditions are satisfied:

(1) There are no technically and economically feasible alternatives or substitutes for methyl bromide available that are acceptable from the standpoint of environment and health and are suitable to the crops and circumstances involved, and

(2) The lack of availability of methyl bromide for a particular use would result in significant market disruption.

Critical use allowance (CUA) means the privilege granted by this subpart to produce or import one (1) kilogram of methyl bromide for an approved critical use during the specified control period. A person's critical use allowances are the total of the allowances obtained under §82.8(c) as may be modified under §82.12 (transfer of allowances).

Critical use allowance for pre-plant uses means the privilege granted by this subpart to produce or import one (1) kilogram of methyl bromide solely for an approved critical use in pre-plant categories specified in Appendix L to this subpart during the specified control period. A person's critical use allowances for pre-plant uses are the total of the allowances obtained under §82.8(c) as may be modified under §82.12 (transfer of allowances).

Critical use allowance for post-harvest uses means the privilege granted by this subpart to produce or import one (1) kilogram of methyl bromide solely for an approved critical use in post-harvest categories specified in appendix L to this subpart during the specified control period. A person's critical use allowances for post-harvest uses are the total of the allowances obtained under §82.8(c) as may be modified under §82.12 (transfer of allowances).

Critical use allowance (CUA) holder means an entity to which EPA allocates a quantity of critical use allowances as reflected in §82.8(c) or who receives a quantity of critical use allowances through a transfer under §82.12.

Critical use methyl bromide means the class I, Group VI controlled substance produced or imported through expending a critical use allowance or that portion of inventory produced or imported prior to the January 1, 2005 phaseout date that is sold only for approved critical uses.

Destruction means the expiration of a controlled substance to the destruction and removal efficiency actually achieved, unless considered completely destroyed as defined in this section. Such destruction might result in a commercially useful end product, but such usefulness would be secondary to the act of destruction. Destruction must be achieved using one of the following controlled processes approved by the Parties to the Protocol:

- (1) Liquid injection incineration;
- (2) Reactor cracking;
- (3) Gaseous/fume oxidation;
- (4) Rotary kiln incineration;
- (5) Cement kiln;
- (6) Radio frequency plasma;
- (7) Municipal waste incinerators (only for the destruction of foams);
- (8) Nitrogen plasma arc;
- (9) Portable plasma arc;
- (10) Argon plasma arc;
- (11) Chemical reaction with hydrogen and carbon dioxide;
- (12) Inductively coupled radio frequency plasma;
- (13) Microwave plasma;
- (14) Porous thermal reactor;
- (15) Gas phase catalytic de-halogenation;
- (16) Superheated steam reactor; or
- (17) Thermal reaction with methane.

Distributor of methyl bromide means the person directly selling a class I, Group VI controlled substance to an applicator.

Essential Metered Dose Inhaler (Essential MDI) means metered dose inhalers for the treatment of asthma and chronic obstructive pulmonary disease, approved by the Food and Drug Administration or by another Party's analogous health authority before December 31, 2000, and considered to be essential by the Party where the MDI product will eventually be sold. In addition, if the MDI product is to be sold in the U.S., the active moiety contained in the MDI must be listed as essential at 21 CFR 2.125(e).

Essential-Use Allowances means the privileges granted by §82.4(n) to produce class I substances, as determined by allocation decisions made by the Parties to the Montreal Protocol and in accordance with the restrictions delineated in the Clean Air Act Amendments of 1990.

Essential-Use Chlorofluorocarbons (Essential-use CFCs) are the CFCs (CFC-11, CFC-12, or CFC-114) produced under the authority of essential-use allowances and not the allowances themselves. Essential-use CFCs include CFCs imported or produced by U.S. entities under the authority of essential-use allowances for use in essential metered dose inhalers, as well as CFCs imported or produced by non-U.S. entities under the authority of privileges granted by the Parties and the national authority of another country for use in essential metered dose inhalers.

Essential-Uses means those uses of controlled substances designated by the Parties to the Protocol to be necessary for the health and safety of, or critical for the functioning of, society; and for which there are no available technically and economically feasible alternatives or substitutes that are acceptable from the standpoint of environment and health. Beginning January 1, 2000 (January 1, 2002 for methyl chloroform) the essential use designations for class I substances must be made in accordance with the provisions of the Clean Air Act Amendments of 1990.

Export means the transport of virgin or used controlled substances from inside the United States or its territories to persons outside the United States or its territories, excluding United States military bases and ships for on-board use.

Export production allowances means the privileges granted by § 82.18(b) to produce HCFC-141b for export following the phaseout of HCFC-141b on January 1, 2003.

Exporter means the person who contracts to sell controlled substances for export or transfers controlled substances to his affiliate in another country.

Facility means any process equipment (e.g., reactor, distillation column) used to convert raw materials or feedstock chemicals into controlled substances or consume controlled substances in the production of other chemicals.

Foreign state means an entity which is recognized as a sovereign nation or

country other than the United States of America.¹

Foreign state complying with, when referring to a foreign state not Party to the 1987 Montreal Protocol, the London Amendment, the Copenhagen Amendment, or the Beijing Amendment, means any foreign state that has been determined to be complying with the 1987 Montreal Protocol or the specified amendments by a Meeting of the Parties.

Foreign state not Party to or Non-Party means a foreign state that has not deposited instruments of ratification, acceptance, or other form of approval with the Directorate of the United Nations Secretariat, evidencing the foreign state's ratification of the provisions of the 1987 Montreal Protocol, the London Amendment, the Copenhagen Amendment, or the Beijing Amendment, as specified.

Halon bank means a facility run by a national government or privately run and authorized by a national government that collects and stores previously-recovered halon for reuse at a later date, granted to a HCFC-141b formulator; an agency, department, or instrumentality of the U.S.; or a non-governmental space vehicle entity by this subpart to order production of or to import HCFC-141b, as determined in accordance with § 82.16(h).

Heel means the amount of a controlled substance that remains in a container after it is discharged or off-loaded (that is no more than ten percent of the volume of the container).

Hydrostatic testing means checking a gas pressure vessel for leaks or flaws. The vessel is filled with a nearly incompressible liquid—usually water or oil—and examined for leaks or permanent changes in shape.

Import means to land on, bring into, or introduce into, or attempt to land on, bring into, or introduce into any place subject to the jurisdiction of the United States whether or not such landing, bringing, or introduction constitutes an importation within the meaning of the customs laws of the United States, with the following exemptions:

¹Taiwan is not considered a foreign state.

§ 82.3

40 CFR Ch. I (7–1–24 Edition)

(1) Off-loading used or excess controlled substances or controlled products from a ship during servicing,

(2) Bringing controlled substances into the U.S. from Mexico where the controlled substance had been admitted into Mexico in bond and was of U.S. origin, and

(3) Bringing a controlled product into the U.S. when transported in a consignment of personal or household effects or in a similar non-commercial situation normally exempted from U.S. Customs attention.

Importer means any person who imports a controlled substance or a controlled product into the United States. “Importer” includes the person primarily liable for the payment of any duties on the merchandise or an authorized agent acting on his or her behalf. The term also includes, as appropriate:

- (1) The consignee;
- (2) The importer of record;
- (3) The actual owner; or
- (4) The transferee, if the right to draw merchandise in a bonded warehouse has been transferred.

Individual shipment means the kilograms of a controlled substance for which a person may make one (1) U.S. Customs entry, as identified in the non-objection letter from the Administrator under §§ 82.13(g) and 82.24(c).

Interstate commerce means the distribution or transportation of any controlled substance between one state, territory, possession or the District of Columbia, and another state, territory, possession or the District of Columbia, or the sale, use or manufacture of any controlled substance in more than one state, territory, possession or District of Columbia. The entry points for which a controlled substance is introduced into interstate commerce are the release of a controlled substance from the facility in which the controlled substance was manufactured, the entry into a warehouse from which the domestic manufacturer releases the controlled substance for sale or distribution, and at the site of United States customs clearance.

Limiting critical condition means the regulatory, technical, and economic circumstances listed in Column C of Appendix L to this subpart that estab-

lish conditions of critical use for methyl bromide in a fumigation area.

Location of use means the geographic area (such as a state, region, or the entire United States) covered by an application for a critical use exemption in which the limiting critical condition may occur.

London Amendments means the Montreal Protocol, as amended at the Second Meeting of the Parties to the Montreal Protocol in London in 1990.

Manufactured, for an appliance, means the date upon which the appliance’s refrigerant circuit is complete, the appliance can function, the appliance holds a full refrigerant charge, and the appliance is ready for use for its intended purposes; and for a pre-charged appliance component, means the date that such component is completely produced by the original equipment manufacture, charged with refrigerant, and is ready for initial sale or distribution in interstate commerce.

Montreal Anniversary amendments means the Montreal Protocol, as amended at the Ninth Meeting of the Parties to the Montreal Protocol in Montreal in 1997.

Montreal Protocol means the Montreal Protocol on Substances that Deplete the Ozone Layer, a protocol to the Vienna Convention for the Protection of the Ozone Layer, including adjustments adopted by the Parties thereto and amendments that have entered into force.

1987 Montreal Protocol means the Montreal Protocol, as originally adopted by the Parties in 1987.

Non-Objection notice means the privilege granted by the Administrator to import a specific individual shipment of a controlled substance in accordance with §§ 82.13(g)(2), (3), and (5) and 82.24(c)(3), (4), and (6).

Party means a foreign state that has deposited instruments of ratification, acceptance, or other form of approval with the Directorate of the United Nations Secretariat, evidencing the foreign state’s ratification of the provisions of the 1987 Montreal Protocol, the London Amendment, the Copenhagen Amendment, or the Beijing Amendment, as specified. (For ratification status, see: <http://ozone.unep.org/>)

Environmental Protection Agency

§ 82.3

new_site/en/treaty_ratification_status.php.)

Person means any individual or legal entity, including an individual, corporation, partnership, association, state, municipality, political subdivision of a state, Indian tribe; any agency, department, or instrumentality of the United States; and any officer, agent, or employee thereof.

Plant means one or more facilities at the same location owned by or under common control of the same person.

Preshipment applications, with respect to class I, Group VI controlled substances, are those non-quarantine applications applied within 21 days prior to export to meet the official requirements of the importing country or existing official requirements of the exporting country. Official requirements are those which are performed by, or authorized by, a national plant, animal, environmental, health or stored product authority.

Production means the manufacture of a controlled substance from any raw material or feedstock chemical, but does not include:

(1) The manufacture of a controlled substance that is subsequently transformed;

(2) The reuse or recycling of a controlled substance;

(3) Amounts that are destroyed by approved destruction technologies; or

(4) Amounts that are spilled or vented unintentionally.

Production allowances means the privileges granted by this subpart to produce controlled substances; however, production allowances may be used to produce controlled substances only in conjunction with consumption allowances. A person's production allowances for class I substances are the total of the allowances obtained under §§ 82.5, 82.7 and 82.9, and as may be modified under § 82.12 (transfer of allowances). A person's production allowances for class II controlled substances are the total of the allowances obtained under § 82.17 and as may be modified under §§ 82.18 and 82.23.

Quarantine applications, with respect to class I, Group VI controlled substances, are treatments to prevent the introduction, establishment and/or spread of quarantine pests (including

diseases), or to ensure their official control, where: (1) Official control is that performed by, or authorized by, a national (including state, tribal or local) plant, animal or environmental protection or health authority; (2) quarantine pests are pests of potential importance to the areas endangered thereby and not yet present there, or present but not widely distributed and being officially controlled. This definition excludes treatments of commodities not entering or leaving the United States or any State (or political subdivision thereof).

Source facility means the location at which a used controlled substance was recovered from a piece of equipment, including the name of the company responsible for, or owning the piece of equipment, a contact person at the location, the mailing address for that specific location, and a phone number and a fax number for the contact person at the location.

Space vehicle means a man-made device, either manned or unmanned, designed for operation beyond earth's atmosphere. This definition includes integral equipment such as models, mock-ups, prototypes, molds, jigs, tooling, hardware jackets, and test coupons. Also included is auxiliary equipment associated with tests, transport, and storage, which through contamination can compromise the space vehicle performance.

Third party applicator means an applicator of critical use methyl bromide who fumigates or treats commodities, structures, crops, or land on behalf of an approved critical user.

Transform means to use and entirely consume (except for trace quantities) a controlled substance in the manufacture of other chemicals for commercial purposes.

Transshipment means the continuous shipment of a controlled substance, from a foreign state of origin through the United States or its territories, to a second foreign state of final destination, as long as the shipment does not enter into United States jurisdiction. A transshipment, as it moves through the United States or its territories, cannot be re-packaged, sorted or otherwise changed in condition.

Unexpended Article 5 allowances means Article 5 allowances that have not been used. At any time in any control period a person's unexpended Article 5 allowances are the total of the level of Article 5 allowances the person has authorization under this subpart to hold at that time for that control period, minus the level of controlled substances that the person has produced in that control period until that time.

Unexpended consumption allowances means consumption allowances that have not been used. At any time in any control period a person's unexpended consumption allowances are the total of the level of consumption allowances the person has authorization under this subpart to hold at that time for that control period, minus the level of controlled substances that the person has produced or imported (not including transshipments and used controlled substances) in that control period until that time.

Unexpended critical use allowances (CUA) means critical use allowances against which methyl bromide has not yet been produced or imported. At any time in any control period a person's unexpended critical use allowances are the total of the level of critical use allowances the person holds at that time for that control period, minus the level of class I, Group VI controlled substances that the person has produced or has imported solely for approved critical uses in that control period.

Unexpended destruction and transformation credits means destruction and transformation credits that have not been used. At any time in any control period a person's unexpended destruction and transformation credits are the total of the level of destruction and transformation credits the person has authorization under this subpart to hold at that time for that control period, minus the level of controlled substances that the person has produced or imported (not including transshipments and used controlled substances) in that control period until that time.

Unexpended essential-use allowances means essential-use allowances that have not been used. At any time in any control period a person's unexpended essential-use allowances are the total

of the level of essential-use allowances the person has authorization under this subpart to hold at that time for that control period, minus the level of controlled substances that the person has imported or had produced in that control period until that time.

Unexpended export production allowances means export production allowances that have not been used. A person's unexpended export production allowances are the total of the quantity of the export production allowances the person has authorization under § 82.18(h) to hold for that control period, minus the quantity of class II controlled substances that the person has produced at that time during the same control period.

Unexpended production allowances means production allowances that have not been used. At any time in any control period a person's unexpended production allowances are the total of the level of production allowances he has authorization under this subpart to hold at that time for that control period, minus the level of controlled substances that the person has produced in that control period until that time.

Use of a class II controlled substance, for the purposes of § 82.15 of this subpart, includes but is not limited to, use in a manufacturing process, use in manufacturing a product, intermediate uses such as formulation or packaging for other subsequent uses, and use in maintaining, servicing, or repairing an appliance or other piece of equipment. Use of a class II controlled substance also includes use of that controlled substance when it is removed from a container used for the transportation or storage of the substance but does not include use of a manufactured product containing a controlled substance.

Used controlled substances means controlled substances that have been recovered from their intended use systems (may include controlled substances that have been, or may be subsequently, recycled or reclaimed).

[60 FR 24986, May 10, 1995]

EDITORIAL NOTE: For FEDERAL REGISTER citations affecting § 82.3, see the List of CFR Sections Affected, which appears in the Finding Aids section of the printed volume and at www.govinfo.gov.

§ 82.4 Prohibitions for class I controlled substances.

(a)(1) Prior to January 1, 1996, for all Groups of class I controlled substances, and prior to January 1, 2005, for class I, Group VI controlled substances, no person may produce, at any time in any control period, (except that are transformed or destroyed domestically or by a person of another Party) in excess of the amount of unexpended production allowances or unexpended Article 5 allowances for that substance held by that person under the authority of this subpart at that time for that control period. Every kilogram of excess production constitutes a separate violation of this subpart.

(2) Effective January 1, 2003, production of class I, Group VI controlled substances is not subject to the prohibitions in paragraph (a)(1) of this section if it is solely for quarantine or preshipment applications as defined in this subpart.

(b)(1) Effective January 1, 1996, for any Class I, Group I, Group II, Group III, Group IV, Group V or Group VII controlled substances, and effective January 1, 2005 for any Class I, Group VI controlled substances, and effective August 18, 2003, for any Class I, Group VIII controlled substance, no person may produce, at any time in any control period (except that are transformed or destroyed domestically or by a person of another Party) in excess of the amount of conferred unexpended essential use allowances or exemptions, or in excess of the amount of unexpended critical use allowances, or in excess of the amount of unexpended Article 5 allowances as allocated under § 82.9 and § 82.11, as may be modified under § 82.12 (transfer of allowances) for that substance held by that person under the authority of this subpart at that time for that control period. Every kilogram of excess production constitutes a separate violation of this subpart.

(2) Effective January 1, 2005, production of class I, Group VI controlled substances is not subject to the prohibitions in paragraph (b)(1) of this section if it is solely for quarantine or preshipment applications as defined in this subpart, or it is solely for export

to satisfy critical uses authorized by the Parties for that control period.

(c)(1) Prior to January 1, 1996, for all Groups of class I controlled substances, and prior to January 1, 2005, for class I, Group VI controlled substances, no person may produce or (except for transshipments, heels or used controlled substances) import, at any time in any control period, (except for controlled substances that are transformed or destroyed) in excess of the amount of unexpended consumption allowances held by that person under the authority of this subpart at that time for that control period. Every kilogram of excess production or importation (other than transshipments, heels or used controlled substances) constitutes a separate violation of this subpart.

(2) Effective January 1, 2003, production and import of class I, Group VI controlled substances is not subject to the prohibitions in paragraph (c)(1) of this section if it is solely for quarantine or preshipment applications as defined in this subpart.

(d) Effective January 1, 1996, for any class I, Group I, Group II, Group III, Group IV, Group V, or Group VII controlled substances, and effective January 1, 2005, for any class I, Group VI controlled substance, and effective August 18, 2003, for any class I, Group VIII controlled substance, no person may import (except for transshipments or heels), at any time in any control period, (except for controlled substances that are transformed or destroyed) in excess of the amount of unexpended essential use allowances or exemptions, or in excess of unexpended critical use allowances, for that substance held by that person under the authority of this subpart at that time for that control period. Every kilogram of excess importation (other than transshipments or heels) constitutes a separate violation of this subpart. It is a violation of this subpart to obtain unused class I controlled substances under the general laboratory exemption in excess of actual need and to recycle that material for sale into other markets.

(e) Effective January 1, 1996, no person may place an order by conferring

§ 82.4

40 CFR Ch. I (7–1–24 Edition)

essential-use allowances for the production of the class I controlled substance, at any time in any control period, in excess of the amount of unexpended essential-use allowances, held by that person under the authority of this subpart at that time for that control period. Effective January 1, 1996, no person may import a class I controlled substance with essential-use allowances, at any time in any control period, in excess of the amount of unexpended essential-use allowances, held by that person under the authority of this subpart at that time for that control period. No person may import or place an order for the production of a class I controlled substance with essential-use allowances, at any time in any control period, other than for the class I controlled substance(s) for which they received essential-use allowances under paragraph (u) of this section. Every kilogram of excess production ordered in excess of the unexpended essential-use allowances conferred to the producer constitutes a separate violation of this subpart. Every kilogram of excess import in excess of the unexpended essential-use allowances held at that time constitutes a separate violation of this subpart.

(f) [Reserved]

(g) Effective January 1, 1996, the U.S. total production and importation of a class I controlled substance (except Group VI) as allocated under this section for essential-use allowances and exemptions, and as obtained under § 82.9 for destruction and transformation credits, may not, at any time, in any control period until January 1, 2000, exceed the percent limitation of baseline production in appendix H of this subpart, as set forth in the Clean Air Act Amendments of 1990. No person shall cause or contribute to the U.S. exceedance of the national limit for that control period.

(h) No person may sell in the U.S. any Class I controlled substance produced explicitly for export to an Article 5 country.

(i) Effective January 1, 1995, no person may import, at any time in any control period, a heel of any class I controlled substance that is greater than 10 percent of the volume of the container in excess of the amount of

unexpended consumption allowances, or unexpended destruction and transformation credits held by that person under the authority of this subpart at that time for that control period. Every kilogram of excess importation constitutes a separate violation of this subpart.

(j)(1) Effective January 1, 1995, no person may import, at any time in any control period, a used class I controlled substance, except for Group II used controlled substances shipped in aircraft halon bottles for hydrostatic testing, without having received a non-objection notice from the Administrator in accordance with § 82.13(g)(2) and (3). A person who receives a non-objection notice for the import of an individual shipment of used controlled substances may not transfer or confer the right to import and may not import any more than the exact quantity, in kilograms, of the used controlled substance cited in the non-objection notice. Every kilogram of importation of used controlled substance in excess of the quantity cited in the non-objection notice issued by the Administrator in accordance with § 82.13(g)(2) and (3) constitutes a separate violation.

(2) No person may import for purposes of destruction, at any time in any control period, a class I controlled substance for which EPA has apportioned baseline production and consumption allowances, without having submitted a certification of intent to import for destruction to the Administrator and received a non-objection notice in accordance with § 82.13(g)(5). A person issued a non-objection notice for the import of an individual shipment of class I controlled substances for destruction may not transfer or confer the right to import and may not import any more than the exact quantity (in kilograms) of the class I controlled substance stated in the non-objection notice. For imports intended to be destroyed in the United States, a person issued a non-objection notice must destroy the controlled substance within one year of the date stamped on the non-objection letter, may not transfer or confer the right to import, and may not import any more than the exact quantity (in kilograms) of the class I controlled substance stated in

the non-objection notice. Every kilogram of import of class I controlled substance in excess of the quantity stated in the non-objection notice issued by the Administrator in accordance with § 82.13(g)(5) constitutes a separate violation of this subpart.

(k)(1) Prior to January 1, 1996, for all Groups of class I controlled substances, and prior to January 1, 2005, for class I, Group VI controlled substances, a person may not use production allowances to produce a quantity of a class I controlled substance unless that person holds under the authority of this subpart at the same time consumption allowances sufficient to cover that quantity of class I controlled substances nor may a person use consumption allowances to produce a quantity of class I controlled substances unless the person holds under authority of this subpart at the same time production allowances sufficient to cover that quantity of class I controlled substances. However, prior to January 1, 1996, for all class I controlled substances, and prior to January 1, 2005, for class I, Group VI controlled substances, only consumption allowances are required to import, with the exception of transshipments, heels, and used controlled substances. Effective January 1, 1996, for all Groups of class I controlled substances, except Group VI, only essential use allowances or exemptions are required to import class I controlled substances, with the exception of transshipments, heels, used controlled substances, and essential use CFCs.

(2) Notwithstanding paragraph (k)(1) of this section, effective January 1, 2003, for class I, Group VI controlled substances, consumption allowances are not required to import quantities solely for quarantine or preshipment applications as defined in this subpart.

(l) Every kilogram of a controlled substance, and every controlled product, imported or exported in contravention of this subpart constitutes a separate violation of this subpart. No person may:

(1) Import or export any quantity of a controlled substance listed in class I, Group I or Group II, in appendix A to this subpart from or to any foreign state not Party to the 1987 Montreal Protocol unless that foreign state is

complying with the 1987 Montreal Protocol (For ratification status, see: http://ozone.unep.org/new_site/en/treaty_ratification_status.php);

(2) Import or export any quantity of a controlled substance listed in class I, Group III, Group IV, or Group V, in appendix A to this subpart, from or to any foreign state not Party to the London Amendment, unless that foreign state is complying with the London Amendment (For ratification status, see: http://ozone.unep.org/new_site/en/treaty_ratification_status.php); or

(3) Import a controlled product, as noted in appendix D, annex 1 to this subpart, from any foreign state not Party to the 1987 Montreal Protocol, unless that foreign state is complying with the 1987 Montreal Protocol (For ratification status, see: http://ozone.unep.org/new_site/en/treaty_ratification_status.php).

(4) Import or export any quantity of a controlled substance listed in class I, Group VII, in appendix A to this subpart, from or to any foreign state not Party to the Copenhagen Amendment, unless that foreign state is complying with the Copenhagen Amendment (For ratification status, see: http://ozone.unep.org/new_site/en/treaty_ratification_status.php).

(5) Import or export any quantity of a controlled substance listed in class I, Group VI, in appendix A to this subpart, from or to any foreign state not Party to the Copenhagen Amendment unless that foreign state is complying with the Copenhagen Amendment (For ratification status, see: http://ozone.unep.org/new_site/en/treaty_ratification_status.php).

(6) Import or export any quantity of a controlled substance listed in class I, Group VIII, in appendix A to this subpart, from or to any foreign state not Party to the Beijing Amendment, unless that foreign state is complying with the Beijing Amendment (For ratification status, see: http://ozone.unep.org/new_site/en/treaty_ratification_status.php).

(m) Effective October 5, 1998, no person may export a controlled product to a Party listed in appendix J of this subpart in any control period after the control period in which EPA publishes

§ 82.4

40 CFR Ch. I (7–1–24 Edition)

a notice in the FEDERAL REGISTER listing that Party in appendix J of this subpart. EPA will publish a notice in the FEDERAL REGISTER that lists a Party in appendix J if the Party formally presents to the U.S. a government document through its embassy in the United States stating that it has established a ban on the import of controlled products and a ban on the manufacture of those same controlled products.

(n) No person may use class I controlled substances produced or imported under the essential use exemption for any purpose other than those set forth in this paragraph. Effective January 1, 1996, essential-use allowances are apportioned to a person under § 82.8(a) and (b) for the exempted production or importation of specified class I controlled substances solely for the purposes listed in paragraphs (n)(1)(i) through (iii) of this section.

(1) Essential-uses for the production or importation of controlled substances as agreed to by the Parties to the Protocol and subject to the periodic revision of the Parties are:

(i) Metered dose inhalers (MDIs) for the treatment of asthma and chronic obstructive pulmonary disease that were approved by the Food and Drug Administration before December 31, 2000.

(ii) Space Shuttle—solvents.

(iii) Essential laboratory and analytical uses (defined in appendix G of this subpart).

(2) Any person acquiring unused class I controlled substances produced or imported under the authority of essential-use allowances or the essential-use exemption granted in § 82.8 to this subpart for use in anything other than an essential-use (*i.e.*, for uses other than those specifically listed in paragraph (n)(1) of this section) is in violation of this subpart. Each kilogram of unused class I controlled substance produced or imported under the authority of essential-use allowances or the essential-use exemption and used for a non-essential use is a separate violation of this subpart. Any person selling unused class I controlled substances produced or imported under authority of essential-use allowances or the essential-use exemption for uses other than an es-

sential-use is in violation of this subpart. Each kilogram of unused class I controlled substances produced or imported under authority of essential-use allowances or the essential-use exemption and sold for a use other than an essential-use is a separate violation of this subpart. It is a violation of this subpart to obtain unused class I controlled substances under the exemption for laboratory and analytical uses in excess of actual need and to recycle that material for sale into other markets.

(o) [Reserved]

(p) Critical Use Exemption: With respect to class I, Group VI substances (methyl bromide):

(1) No person shall sell critical use methyl bromide without first receiving a certification from the purchaser that the quantity purchased will be sold or used solely for an approved critical use. Every kilogram of critical use methyl bromide sold without first obtaining such certification constitutes a separate violation of this subpart.

(2) For approved critical users, each action associated with each 200 kilograms of critical use methyl bromide for the following subparagraphs constitutes a separate violation of this subpart.

(i) No person shall take possession of quantities of critical use methyl bromide or acquire fumigation services using quantities of critical use methyl bromide without first completing the appropriate certification in accordance with the requirements in § 82.13.

(ii) No person who purchases critical use methyl bromide may use such quantities for a use other than the specified critical use listed in column A and the specified location of use in column B of appendix L to this subpart.

(iii) No person who purchases critical use methyl bromide produced or imported with expended critical use allowances for pre-plant uses, may use such quantities for other than the pre-plant uses as specified in column A and column B of appendix L to this subpart.

(iv) No person who purchases critical use methyl bromide produced or imported with expended critical use allowances for post-harvest uses, may

Environmental Protection Agency

§ 82.5

use such quantities for other than the post-harvest uses as specified in column A and column B of appendix L to this subpart.

(v) No person who uses critical use methyl bromide on a specific field or structure may concurrently or subsequently use non-critical use methyl bromide on the same field or structure for the same use (as defined in column A and column B of appendix L) in the same control period, excepting methyl bromide used under the quarantine and pre-shipment exemption.

(vi) No person who purchases critical use methyl bromide during the control period shall use that methyl bromide on a field or structure for which that person has used non-critical use methyl bromide for the same use (as defined in columns A and B of appendix L) in the same control period, excepting methyl bromide used under the quarantine and pre-shipment exemption, unless, subsequent to that person's use of the non-critical use methyl bromide, that person becomes subject to a prohibition on the use of methyl bromide alternatives due to the reaching of a local township limit described in appendix L of this part, or becomes an approved critical user as a result of rule-making.

(q) Emergency use exemption. [Reserved]

(r) No person may sell or use methyl bromide produced or imported under the quarantine and preshipment exemption for any purpose other than for quarantine applications or preshipment applications as defined in § 82.3. Each kilogram of methyl bromide produced

or imported under the authority of the quarantine and preshipment exemption and sold or used for a use other than quarantine or preshipment is a separate violation of this subpart.

(s) No person may sell or distribute, or offer for sale or distribution, any class I substance that they know, or have reason to know, was imported in violation of this section, except for such actions needed to re-export the controlled substance. Every kilogram of a controlled substance imported in contravention of this paragraph (s) that is sold or distributed, or offered for sale or distribution, constitutes a separate violation of this subpart.

[60 FR 24986, May 10, 1995]

EDITORIAL NOTE: For FEDERAL REGISTER citations affecting § 82.4, see the List of CFR Sections Affected, which appears in the Finding Aids section of the printed volume and at www.govinfo.gov.

§ 82.5 Apportionment of baseline production allowances for class I controlled substances.

Persons who produced controlled substances in Group I or Group II in 1986 are apportioned baseline production allowances as set forth in paragraphs (a) and (b) of this section. Persons who produced controlled substances in Group III, IV, or V in 1989 are apportioned baseline production allowances as set forth in paragraphs (c), (d), and (e) of this section. Persons who produced controlled substances in Group VI and VII in 1991 are apportioned baseline allowances as set forth in paragraphs (f) and (g) of this section.

<i>Controlled substance</i>	<i>Person</i>	<i>Allowances (kg)</i>
(a) For Group I controlled substances:		
CFC-11	Allied-Signal, Inc	23,082,358
	E.I. DuPont de Nemours & Co	33,830,000
	Elf Atochem, N.A	21,821,500
CFC-12	Laroche Chemicals	12,856,364
	Allied-Signal, Inc	35,699,776
	E.I. DuPont de Nemours & Co	64,849,000
CFC-113	Elf Atochem, N.A	31,089,807
	Laroche Chemicals	15,330,909
	Allied-Signal, Inc	21,788,896
CFC-114	E.I. DuPont de Nemours & Co	58,553,000
	Allied-Signal, Inc	1,488,569
CFC-115	E.I. DuPont de Nemours & Co	4,194,000
	E.I. DuPont de Nemours & Co	4,176,000
(b) For Group II controlled substances:		

§ 82.6

40 CFR Ch. I (7–1–24 Edition)

<i>Controlled substance</i>	<i>Person</i>	<i>Allowances (kg)</i>
Halon-1211	Great Lakes Chemical Corp	826,487
	ICI Americas, Inc	2,135,484
Halon-1301	E.I. DuPont de Nemours & Co	3,220,000
	Great Lakes Chemical Corp	1,766,850
Halon-2402		
(c) For Group III controlled substances:		
CFC-13	Allied-Signal, Inc	127,125
	E.I. DuPont de Nemours & Co	187,831
	Elf Atochem, N.A	3,992
	Great Lakes Chemical Corp	56,381
	Laroche Chemicals	29,025
CFC-111		
CFC-112		
CFC-211	E.I. DuPont de Nemours & Co	11
CFC-212	E.I. DuPont de Nemours & Co	11
CFC-213	E.I. DuPont de Nemours & Co	11
CFC-214	E.I. DuPont de Nemours & Co	11
CFC-215	E.I. DuPont de Nemours & Co	511
	Halocarbon Products Corp	1,270
CFC-216	E.I. DuPont de Nemours & Co	170,574
CFC-217	E.I. DuPont de Nemours & Co	511
(d) For Group IV controlled substances:		
CCl ₄	Akzo Chemicals, Inc	7,873,615
	Degussa Corporation	26,546
	Dow Chemical Company, USA	18,987,747
	E.I. DuPont de Nemours & Co	9,099
	Hanlin Chemicals-WV, Inc	219,616
	ICI Americas, Inc	853,714
	Occidental Chemical Corp	1,059,358
	Vulcan Chemicals	21,931,987
(e) For Group V controlled substances:		
Methyl Chloroform	Dow Chemical Company, USA	168,030,117
	E.I. DuPont de Nemours & Co	2
	PPG Industries, Inc	57,450,719
	Vulcan Chemicals	89,689,064
(f) For Group VI controlled substances:		
Methyl Bromide	Great Lakes Chemical Corporation	19,945,788
	Ethyl Corporation	8,233,894
(g) For Group VII controlled substances:		
HBFC 22B1–1	Great Lakes Chemical Corporation	46,211

[60 FR 24986, May 10, 1995, as amended at 68 FR 2848, Jan. 21, 2003]

§ 82.6 Apportionment of baseline consumption allowances for class I controlled substances.

Persons who produced, imported, or produced and imported controlled substances in Group I or Group II in 1986 are apportioned chemical-specific baseline consumption allowances as set forth in paragraphs (a) and (b) of this section. Persons who produced, imported, or produced and imported controlled substances in Group III, Group IV, or Group V in 1989 are apportioned

chemical-specific baseline consumption allowances as set forth in paragraphs (c), (d) and (e) of this section. Persons who produced, imported, or produced and imported controlled substances in Group VI or VII in 1991 are apportioned chemical specific baseline consumption allowances as set forth in paragraphs (f) and (g) of this section.

Environmental Protection Agency

§ 82.6

<i>Controlled substance</i>	<i>Person</i>	<i>Allowances (kg)</i>
(a) For Group I controlled substances:		
CFC-11	Allied-Signal, Inc	22,683,833
	E.I. DuPont de Nemours & Co	32,054,283
	Elf Atochem, N.A	21,740,194
	Hoechst Celanese Corporation	185,396
	ICI Americas, Inc	1,673,436
	Kali-Chemie Corporation	82,500
	Laroche Chemicals	12,695,726
	National Refrigerants, Inc	693,707
	Refricentro, Inc	160,697
	Sumitomo Corporation of America	5,800
CFC-12	Allied-Signal, Inc	35,236,397
	E.I. DuPont de Nemours & Co	61,098,726
	Elf Atochem, N.A	32,403,869
	Hoechst Celanese Corporation	138,865
	ICI Americas, Inc	1,264,980
	Kali-Chemie Corporation	355,440
	Laroche Chemicals	15,281,553
	National Refrigerants, Inc	2,375,384
CFC-113	Refricentro, Inc	242,526
	Allied-Signal, Inc	18,241,928
	E.I. DuPont de Nemours & Co	49,602,858
	Elf Atochem, N.A	244,908
	Holchem	265,199
	ICI Americas, Inc	2,399,700
	Refricentro, Inc	37,385
	Sumitomo Corp. of America	280,163
CFC-114	Allied-Signal, Inc	1,429,582
	E.I. DuPont de Nemours & Co	3,686,103
	Elf Atochem, N.A	22,880
	ICI Americas, Inc	32,930
CFC-115	E.I. DuPont de Nemours & Co	2,764,109
	Elf Atochem, N.A	633,007
	Hoechst Celanese Corporation	8,893
	ICI Americas, Inc	2,366,351
	Laroche Chemicals	135,520
	Refricentro, Inc	27,337
(b) For Group II controlled substances:		
Halon-1211	Elf Atochem, N.A	411,292
	Great Lakes Chemical Corp	772,775
	ICI Americas, Inc	2,116,641
	Kali-Chemie Corporation	330,000
Halon-1301	E.I. DuPont de Nemours & Co	2,772,917
	Elf Atochem, N.A	89,255
	Great Lakes Chemical Corp	1,744,132
Halon-2402	Kali-Chemie Corporation	54,380
	Ausimont	34,400
	Great Lakes Chemical Corp	15,900
(c) For Group III controlled substances:		
CFC-13	Allied-Signal, Inc	127,124
	E.I. DuPont de Nemours & Co	158,508
	Elf Atochem, N.A	3,992
	Great Lakes Chemical Corp	56,239
	ICI Americas, Inc	5,855
	Laroche Chemicals	29,025
	National Refrigerants, Inc	16,665
CFC-111		
CFC-112	Sumitomo Corp of America	5,912
	TG (USA) Corporation	9,253
CFC-211	E.I. DuPont de Nemours & Co	11
CFC-212	E.I. DuPont de Nemours & Co	11
CFC-213	E.I. DuPont de Nemours & Co	11
CFC-214	E.I. DuPont de Nemours & Co	11

§ 82.7

40 CFR Ch. I (7–1–24 Edition)

<i>Controlled substance</i>	<i>Person</i>	<i>Allowances (kg)</i>
CFC-215	E.I. DuPont de Nemours & Co	511
	Halocarbon Products Corp	1,270
CFC-216	E.I. DuPont de Nemours & Co	170,574
CFC-217	E.I. DuPont de Nemours & Co	511
	(d) For Group IV controlled substances:	
CCl ₄	Crescent Chemical Co	56
	Degussa Corporation	12,466
	Dow Chemical Company, USA	8,170,561
	E.I. DuPont de Nemours & Co	26,537
	Elf Atochem, N.A	41
	Hanlin Chemicals-WV, Inc	103,133
	Hoechst Celanese Corporation	3
	ICC Chemical Corp	1,173,723
	ICI Americas, Inc	855,466
	Occidental Chemical Corp	497,478
	Sumitomo Corporation of America	9
	(e) For Group V controlled substances:	
Methyl Chloroform	3V Chemical Corp	3,528
	Actex, Inc	50,171
	Atochem North America	74,355
	Dow Chemical Company, USA	125,200,200
	E.I. DuPont de Nemours & Co	2
	IBM	2,026
	ICI Americas, Inc	14,179,850
	Laidlaw	420,207
	PPG Industries	45,254,115
	Sumitomo	1,954
	TG (USA) Corporation	7,073
	Unitor Ships Service, Inc	14,746
	Vulcan Chemicals	70,765,072
	(f) For Group VI controlled substances:	
Methyl Bromide	Great Lakes Chemical Corporation	15,514,746
	Ethyl Corporation	6,379,906
	AmeriBrom, Inc	3,524,393
	TriCal, Inc	109,225
	(g) For Group VII controlled substances:	
HBFC 22B1–1	Great Lakes Chemical Corporation	40,110

[60 FR 24986, May 10, 1995, as amended at 68 FR 2848, Jan. 21, 2003]

§ 82.7 Grant and phase reduction of baseline production and consumption allowances for class I controlled substances.

For each control period specified in the following table, each person is

granted the specified percentage of the baseline production and consumption allowances apportioned to him under §§ 82.5 and 82.6 of this subpart.

Control period	Class I substances in groups I and II, (In percent)	Class I substances in group II, (In percent)	Class I substances in group IV (In percent)	Class I substances in group V (In percent)	Class I substances in group VI (In percent)	Class I substances in group VII (In percent)
1994	25	0	50	50	100	100
1995	25	0	15	30	100	100
1996	0	0	0	0	100	0
1997	0	0	0	0	100	0
1998	0	0	0	0	100	0
1999	0	0	0	0	75	0
2000	0	0	0	0	75	0
2001					50	
2002					50	

Environmental Protection Agency

§ 82.9

Control period	Class I substances in groups I and III, (In percent)	Class I substances in group II, (In percent)	Class I substances in group IV (In percent)	Class I substances in group V (In percent)	Class I substances in group VI (In percent)	Class I substances in group VII (In percent)
2003					30	
2004					30	
2005					0	

[65 FR 70803, Nov. 28, 2000]

§ 82.8 Grant of essential use allowances and critical use allowances.

(a) Effective January 1, 1996, persons in the following list are allocated essential-use allowances or exemptions

for quantities of a specific class I controlled substance for a specific essential-use (the Administrator reserves the right to revise the allocations based on future decisions of the Parties).

TABLE I—ESSENTIAL USE ALLOWANCES FOR CALENDAR YEAR 2010

(i) Metered Dose Inhalers (for oral inhalation) for Treatment of Asthma and Chronic Obstructive Pulmonary Disease		
Company	Chemical	2010 Quantity (metric tons)
Armstrong	CFC-11 or CFC-12 or CFC-114	30.0

(b) There is a global exemption for the production and import of class I controlled substances for essential laboratory and analytical uses, subject to the restrictions in appendix G of this subpart, and subject to the record-keeping and reporting requirements at § 82.13(u) through (x). There is no amount specified for this exemption.

(c) Effective January 1, 2005, critical use allowances are apportioned as set forth in paragraph (c)(1) of this section for the exempted production and im-

port of class I, Group VI controlled substances specifically for those approved critical uses listed in appendix L to this subpart for the applicable control period. Every kilogram of production and import in excess of the total number and type of unexpended critical use allowances held for a particular type of use constitutes a separate violation of this subpart.

(1) Allocated critical use allowances granted for specified control period.

Company	2016 Critical use allowances for pre-plant uses* (kilograms)	2016 Critical use allowances for post-harvest uses* (kilograms)
Great Lakes Chemical Corp. A Chemtura Company	84,222	1,179
Albemarle Corp.	34,634	485
ICL-IP America	19,140	268
TriCal, Inc.	596	8
<i>Total</i>	138,592	1,939

* For production or import of Class I, Group VI controlled substance exclusively for the pre-plant or post-harvest uses specified in appendix L to this subpart.

(2) [Reserved]

[69 FR 77003, Dec. 23, 2004]

EDITORIAL NOTE: For FEDERAL REGISTER citations affecting § 82.8, see the List of CFR Sections Affected, which appears in the Finding Aids section of the printed volume and at www.govinfo.gov.

§ 82.9 Availability of production allowances in addition to baseline production allowances for class I controlled substances.

(a)—(b) [Reserved]

(c) A company may increase or decrease its production allowances, including its Article 5 allowances, by trading with another Party to the Protocol according to the provision under this paragraph (c). A company may increase or decrease its essential-use allowances for CFCs for use in essential MDIs according to the provisions under this paragraph (c). A nation listed in appendix C to this subpart (Parties to the Montreal Protocol) must agree either to transfer to the person for the current control period some amount of production or import that the nation is permitted under the Montreal Protocol or to receive from the person for the current control period some amount of production or import that the person is permitted under this subpart. If the controlled substance is produced under the authority of production allowances and is to be sold in the United States or to another Party (not the Party from whom the allowances are received), the U.S. company must expend its consumption allowances allocated under §§82.6 and 82.7 in order to produce with the additional production allowances.

(1) For trades from a Party, the person must obtain from the principal diplomatic representative in that nation's embassy in the United States a signed document stating that the appropriate authority within that nation has established or revised production limits or essential-use allowance limits for the nation to equal the lesser of the maximum production that the nation is allowed under the Protocol minus the amount transferred, the maximum production or essential-use allowances that are allowed under the nation's applicable domestic law minus the amount transferred, or the average of the nation's actual national production level for the three years prior to the transfer minus the production transferred. The person must submit to the Administrator a transfer request that includes a true copy of this document and that sets forth the following:

- (i) The identity and address of the person;
- (ii) The identity of the Party;
- (iii) The names and telephone numbers of contact persons for the person and for the Party;

(iv) The chemical type, type of allowance being transferred, and the level of allowances being transferred;

(v) The control period(s) to which the transfer applies; and

(vi) For increased production intended for export to the Party from whom the allowances would be received, a signed statement of intent to export to the Party.

(vii) In the case of transferring essential-use allowances, the transferor must include a signed document from the transferee identifying the CFC MDI products that will be produced using the essential-use allowances.

(2) For trades to a Party, a person must submit a transfer request that sets forth the following:

- (i) The identity and address of the person;
- (ii) The identity of the Party;
- (iii) The names and telephone numbers of contact persons for the person and for the Party;
- (iv) The chemical type, type of allowance being transferred, and the level of allowances being transferred; and
- (v) The control period(s) to which the transfer applies.

(3) After receiving a transfer request that meets the requirements of paragraph (c)(2) of this section, the Administrator may, at his discretion, consider the following factors in deciding whether to approve such a transfer:

- (i) Possible creation of economic hardship;
- (ii) Possible effects on trade;
- (iii) Potential environmental implications; and
- (iv) The total amount of unexpended production or essential-use allowances held by a U.S. entity.

(v) In the case of transfer of essential-use allowances the Administrator may consider whether the CFCs will be used for production of essential MDIs.

(4) The Administrator will issue the person a notice either granting or deducting production allowances, Article 5 allowances, or essential-use allowances, and specifying the control period to which the transfer applies, provided that the request meets the requirement of paragraph (c)(1) of this section for trades from Parties and paragraph (c)(2) of this section for

trades to Parties, unless the Administrator has decided to disapprove the trade under paragraph (c)(3) of this section. For a trade from a Party, the Administrator will issue a notice that revises the allowances held by the person to equal the unexpended production, Article 5, or essential-use allowances held by the person under this subpart plus the level of allowable production transferred from the Party. For a trade to a Party, the Administrator will issue a notice that revises the production limit for the person to equal the lesser of:

(i) The unexpended production allowances, essential-use allowances, or Article 5 allowances held by the person under this subpart minus the amount transferred; or

(ii) The unexpended production allowances, essential-use allowances, or Article 5 allowances held by the person under this subpart minus the amount by which the United States average annual production of the controlled substance being traded for the three years prior to the transfer is less than the total production allowable for that substance under this subpart minus the amount transferred. The change in allowances will be effective on the date that the notice is issued.

(5) If after one person obtains approval for a trade of allowable production of a controlled substance to a Party, one or more other persons obtain approval for trades involving the same controlled substance and the same control period, the Administrator will issue notices revising the production limits for each of the other persons trading that controlled substance in that control period to equal the lesser of:

(i) The unexpended production allowances or Article 5 allowances held by the person under this subpart minus the amount transferred; or

(ii) The unexpended production allowances or Article 5 allowances held by the person under this subpart minus the amount by which the United States average annual production of the controlled substance being traded for the three years prior to the transfer is less than the total allowable production for that substance under this subpart multiplied by the amount transferred di-

vided by the total amount transferred by all the other persons trading the same controlled substance in the same control period minus the amount transferred by that person.

(iii) The Administrator will also issue a notice revising the production limit for each person who previously obtained approval of a trade of that substance in that control period to equal the unexpended production allowances or unexpended Article 5 allowances held by the person under this subpart plus the amount by which the United States average annual production of the controlled substance being traded for the three years prior to the transfer is less than the total allowable production under this subpart multiplied by the amount transferred by that person divided by the amount transferred by all of the persons who have traded that controlled substance in that control period. The change in production allowances or Article 5 allowances will be effective on the date that the notice is issued.

(d) Effective January 1, 1996, there will be no trade in production or consumption allowances with other Parties to the Protocol for class I controlled substances, except for class I, Group VI, methyl bromide.

(e)—(f) [Reserved]

(g) *International transfer of essential-use CFCs.* (1) For trades of essential-use CFCs where the transferee or the transferor is a person in another nation (Party), the persons involved in the transfer must submit the information requested in § 82.12(d)(2) and (d)(3), along with a signed document from the principal diplomatic representative in the Party's embassy in the United States stating that the appropriate authority within that nation has approved the transfer of the essential-use CFCs.

(2) If the transfer claim is complete, and EPA does not object to the transfer, then EPA will issue letters to the transferor and the transferee indicating that the transfer may proceed. EPA reserves the right to disallow a transfer if the transfer request is incomplete, or if it has reason to believe that the transferee plans to produce MDIs that are not essential MDIs. If EPA objects to the transfer, EPA will

§ 82.10

issue letters to the transferor and transferee stating the basis for disallowing the transfer. The burden of proof is placed on the transferee to retain sufficient records to prove that the transferred essential-use CFCs are used only for production of essential MDIs. If EPA ultimately finds that the transferee did not use the essential-use CFCs for production of essential MDIs then the transferee is in violation of this subpart.

[60 FR 24986, May 10, 1995, as amended at 63 FR 41643, Aug. 4, 1998; 63 FR 53290, Oct. 5, 1998; 65 FR 70804, Nov. 28, 2000; 67 FR 6360, Feb. 11, 2002; 67 FR 21134, Apr. 29, 2002; 70 FR 77047, Dec. 29, 2005; 85 FR 15292, Mar. 17, 2020]

§ 82.10 [Reserved]

§ 82.11 Exports of class I controlled substances to Article 5 Parties.

(a) If apportioned Article 5 allowances under § 82.9(a) or § 82.11(a)(2), a person may produce Class I controlled substances, in accordance with the prohibitions in § 82.4 and the reduction schedule in § 82.11(a)(3), to be exported (not including exports resulting in transformation or destruction, or exports of used controlled substances) to foreign states listed in appendix E to this subpart (Article 5 countries).

(1) A person must submit a notice to the Administrator of exports to Article 5 countries (except exports resulting in transformation or destruction, or used controlled substances) at the end of the quarter that includes the following:

(i) The identities and addresses of the exporter and the Article 5 country recipient of the exports;

(ii) The exporter's Employee Identification Number;

(iii) The names and telephone numbers of contact persons for the exporter and for the recipient;

(iv) The quantity and the type of controlled substances exported, its source and date purchased;

(v) The date on which, and the port from which, the controlled substances were exported from the United States or its territories;

(vi) The Article 5 country to which the controlled substances were exported;

(vii) A copy of the bill of lading and invoice indicating the net quantity

40 CFR Ch. I (7–1–24 Edition)

shipped and documenting the sale of the controlled substances to the Article 5 purchaser;

(viii) The commodity code of the controlled substance exported; and

(ix) A copy of the invoice or sales agreement covering the sale of the controlled substances to the recipient Article 5 country that contains provisions forbidding the reexport of the controlled substance in bulk form and subjecting the recipient or any transferee of the recipient to liquidated damages equal to the resale price of the controlled substances if they are reexported in bulk form.

(2) Persons who reported exports of Class I, Group I controlled substances to Article 5 countries in 2000–2003 are apportioned baseline Article 5 allowances as set forth in § 82.11(a)(2)(i). Persons who reported exports of Class I, Group VI controlled substances to Article 5 countries in 1995–1998 are apportioned baseline Article 5 allowances as set forth in § 82.11(a)(2)(ii).

(i) For Group I Controlled Substances

Controlled Substance	Person	Allowances (kg)
CFC–11	Honeywell	7,150
	Sigma Aldrich	1
CFC–113	Fisher Scientific	5
	Honeywell	313,686
CFC–114	Sigma Aldrich	48
	Honeywell	24,798
	Sigma Aldrich	1

(ii) For Group VI Controlled Substances

Controlled Substance	Person	Allowances (kg)
Methyl Bromide	Albemarle	1,152,714
	Ameribrom	176,903
	Great Lakes Chemical Corporation.	3,825,846

(3) Phased Reduction Schedule for Article 5 Allowances allocated in § 82.11. For each control period specified in the following table, each person is granted the specified percentage of the baseline Article 5 allowances apportioned under § 82.11.

Control Period	Class I substances in group I (in percent)	Class I substances in group VI (in percent)
2006	50	80
2007	15	80
2008	15	80

Environmental Protection Agency

§ 82.12

Control Period	Class I substances in group I (in percent)	Class I substances in group VI (in percent)
2009	15	80
2010	0	80
2011	0	80
2012	0	80
2013	0	80
2014	0	80
2015	0	0

(2) [Reserved]

(b) [Reserved]

[60 FR 24986, May 10, 1995, as amended at 70 FR 77047, Dec. 29, 2005]

§ 82.12 Transfers of allowances for class I controlled substances.

(a) *Inter-company transfers.* (1) After January 1, 2002, any essential-use allowance holder (including those persons that hold essential-use allowances issued by a Party other than the United States) ("transferor") may transfer essential-use allowances for CFCs to a metered dose inhaler company solely for the manufacture of essential MDIs. After January 1, 2005, any critical use allowance holder ("transferor") may transfer critical use allowances to any other person ("transferee").

(i) The transferor must submit to the Administrator a transfer claim setting forth the following:

(A) The identities and addresses of the transferor and the transferee;

(B) The name and telephone numbers of contact persons for the transferor and the transferee;

(C) The type of allowances being transferred, including the names of the controlled substances for which allowances are to be transferred;

(D) The group of controlled substances to which the allowances being transferred pertains;

(E) The amount of allowances being transferred;

(F) The control period(s) for which the allowances are being transferred;

(G) The amount of unexpended allowances of the type and for the control period being transferred that the transferor holds under authority of this subpart as of the date the claim is submitted to EPA; and

(H) The one percent offset applied to the unweighted amount traded will be

deducted from the transferor's production or consumption allowance balance (except for trades from transformers and destroyers to producers or importers for the purpose of allowance reimbursement). In the case of transferring essential use allowances, the amount of one tenth of one percent of the amount traded will be deducted from the transferor's allowance balance. In the case of transferring critical use allowances, the amount of one tenth of one percent of the amount traded will be deducted from the transferor's critical use allowance balance.

(I) The transferor must include a signed document from the transferee identifying the CFC MDI products that will be produced using the essential-use allowances.

(ii) The Administrator will determine whether the records maintained by EPA, taking into account any previous transfers and any production, allowable imports and exports of controlled substances reported by the transferor, indicate that the transferor possesses, as of the date the transfer claim is processed, unexpended allowances sufficient to cover the transfer claim (*i.e.*, the amount to be transferred plus, in the case of transferors of essential use allowances and critical use allowances, one tenth of one percent of the transferred amount). Within three working days of receiving a complete transfer claim, the Administrator will take action to notify the transferor and transferee as follows:

(A) If EPA's records show that the transferor has sufficient unexpended allowances to cover the transfer claim, the Administrator will issue a notice indicating that EPA does not object to the transfer and will reduce the transferor's balance of unexpended allowances by the amount to be transferred plus, in the case of transfers of production or consumption allowances, one percent of that amount, or in the case of transfers of essential use allowances, one tenth of one percent of that amount. When EPA issues a no objection notice, the transferor and the transferee may proceed with the transfer. However, if EPA ultimately finds that the transferor did not have sufficient unexpended allowances to cover

the claim, the transferor and transferee will be held liable for any violations of the regulations of this subpart that occur as a result of, or in conjunction with, the improper transfer.

(B) If EPA's records show that the transferor has insufficient unexpended allowances to cover the transfer claim, or that the transferor has failed to respond to one or more Agency requests to supply information needed to make a determination, the Administrator will issue a notice disallowing the transfer. Within 10 working days after receipt of notification, either party may file a notice of appeal, with supporting reasons, with the Administrator. The Administrator may affirm or vacate the disallowance. If no appeal is taken by the tenth working day after notification, the disallowance shall be final on that day.

(iii) In the event that the Administrator does not respond to a transfer claim within the three working days specified in paragraph (a)(1)(ii) of this section the transferor and transferee may proceed with the transfer. EPA will reduce the transferor's balance of unexpended allowances by the amount to be transferred plus, in the case of transfers of production or consumption allowances, one percent of that amount, and in the case of essential use allowances and critical use allowances, one tenth of one percent of that amount. However if EPA ultimately finds that the transferor did not have sufficient unexpended allowances to cover the claim, the transferor and transferee will be held liable for any violations of the regulations of this subpart that occur as a result of, or in conjunction with, the improper transfer.

(2) [Reserved]

(b)—(c) [Reserved]

(d) *Transfers of essential-use CFCs.* (1) Effective January 1, 2002, any metered dose inhaler company (transferor) may transfer essential-use CFCs to another metered dose inhaler company (transferee) provided that the Administrator approves the transfer.

(2) The transferee must submit a transfer claim to the Administrator for approval before the transfer can take place. The transfer claim must set forth the following:

(i) The identities and addresses of the transferor and the transferee; and

(ii) The name and telephone numbers of contact persons for the transferor and the transferee; and

(iii) The amount of each controlled substance (CFC-11, CFC-12, or CFC-114) being transferred; and

(iv) The specific metered dose inhaler products (i.e. the MDI drug product or active moiety) that the transferee plans to produce with the transferred CFCs; and

(v) The country(ies) where the CFC metered dose inhalers produced with the transferred essential-use CFCs will be sold if other than in the United States; and

(vi) Certification that the essential-use CFCs will be used in the production of essential MDIs. If the MDIs are to be sold in the United States, the certification must state that MDIs produced with the transferred essential-use CFCs are listed as essential at 21 CFR 2.125, and were approved by the Food and Drug Administration before December 31, 2000. If the MDIs produced with the essential-use CFCs are to be sold outside the United States, the transferee must certify that the metered dose inhalers produced with the essential-use CFCs are considered essential by the importing country.

(3) The transferor must submit a letter stating that it concurs with the terms of the transfer as requested by the transferee.

(4) Once the transfer claim is complete, and if EPA does not object to the transfer, then EPA will issue letters to the transferor and the transferee within 10 business days indicating that the transfer may proceed. EPA reserves the right to disallow a transfer if the transfer request is incomplete, or if it has reason to believe that the transferee plans use the essential-use CFCs in anything other than essential MDIs. If EPA objects to the transfer, within EPA will issue letters to the transferor and transferee stating the basis for disallowing the transfer. The burden of proof is placed on the transferee to retain sufficient records to prove that the transferred essential-use CFCs are used only for production of essential MDIs. If EPA ultimately finds that the transferee did not use the essential-use

Environmental Protection Agency

§ 82.13

CFCs for production of essential MDIs then the transferee is in violation of this subpart.

[60 FR 24986, May 10, 1995, as amended at 65 FR 70804, Nov. 28, 2000; 66 FR 1471, Jan. 8, 2001; 67 FR 6361, Feb. 11, 2002; 69 FR 77004, Dec. 23, 2004; 79 FR 44311, July 31, 2014; 85 FR 15292, Mar. 17, 2020]

§ 82.13 Recordkeeping and reporting requirements for class I controlled substances.

(a) *Effective dates.* Unless otherwise specified, the recordkeeping and reporting requirements set forth in this section take effect on January 1, 1995. For class I, Group VIII controlled substances, the recordkeeping and reporting requirements set forth in this section take effect on August 18, 2003. For critical use methyl bromide, the recordkeeping and reporting requirements set forth in this section take effect January 1, 2005.

(b) Reports and records required by this section may be used for purposes of compliance determinations. These requirements are not intended as a limitation on the use of other evidence admissible under the Federal Rules of Evidence. Failure to provide the reports, petitions and records required by this section, and to certify the accuracy of the information in the reports, petitions and records required by this section, will be considered a violation of this subpart. False statements made in reports, petitions and records will be considered violations of Section 113 of the Clean Air Act.

(c) *Timing of reports.* Unless otherwise specified, reports required by this section must be submitted to the Administrator within 45 days of the end of the applicable reporting period. Revisions of reports that are required by this section must be submitted to the Administrator within 180 days of the end of the applicable reporting period, unless otherwise specified. Starting May 18, 2020, reports that are available for submission through the Central Data Exchange must be submitted electronically through that tool.

(d) Records and copies of reports required by this section must be retained for three years.

(e) In reports required by this section, quantities of controlled sub-

stances must be stated in terms of kilograms.

(f) *Producers.* Every person (“producer”) who produces class I controlled substances during a control period must comply with the following recordkeeping and reporting requirements:

(1) Within 120 days of May 10, 1995, or within 120 days of the date that a producer first produces a class I controlled substance, whichever is later, and within 120 days of July 18, 2003 for class I, Group VIII controlled substances, every producer who has not already done so must submit to the Administrator a report describing:

(i) The method by which the producer in practice measures daily quantities of controlled substances produced;

(ii) Conversion factors by which the daily records as currently maintained can be converted into kilograms of controlled substances produced, including any constants or assumptions used in making those calculations (e.g., tank specifications, ambient temperature or pressure, density of the controlled substance);

(iii) Internal accounting procedures for determining plant-wide production;

(iv) The quantity of any fugitive losses accounted for in the production figures; and

(v) The estimated percent efficiency of the production process for the controlled substance. Within 60 days of any change in the measurement procedures or the information specified in the above report, the producer must submit a report specifying the revised data or procedures to the Administrator.

(2) *Recordkeeping requirements* Every producer of a class I controlled substance during a control period must maintain the following records:

(i) Dated records of the quantity of each controlled substance produced at each facility;

(ii) Dated records of the quantity of controlled substances produced for use in processes that result in their transformation or for use in processes that result in their destruction and quantity sold for use in processes that result in their transformation or for use in processes that result in their destruction;

(iii) Dated records of the quantity of controlled substances produced for an essential-use and quantity sold for use in an essential-use process;

(iv)—(v) [Reserved]

(vi) Copies of invoices or receipts documenting sale of controlled substance for use in processes resulting in their transformation or for use in processes resulting in destruction;

(vii) Dated records of the quantity of each controlled substance used at each facility as feedstocks or destroyed in the manufacture of a controlled substance or in the manufacture of any other substance, and any controlled substance introduced into the production process of the same controlled substance at each facility;

(viii) Dated records identifying the quantity of each chemical not a controlled substance produced within each facility also producing one or more controlled substances;

(ix) Dated records of the quantity of raw materials and feedstock chemicals used at each facility for the production of controlled substances;

(x) Dated records of the shipments of each controlled substance produced at each plant;

(xi) The quantity of controlled substances, the date received, and names and addresses of the source of used materials containing controlled substances which are recycled or reclaimed at each plant;

(xii) Records of the date, the controlled substance, and the estimated quantity of any spill or release of a controlled substance that equals or exceeds 100 pounds;

(xiii) Internal Revenue Service Certificates in the case of transformation, or the destruction verification in the case of destruction (as in § 82.13(k)), showing that the purchaser or recipient of a controlled substance, in the United States or in another country that is a Party, certifies the intent to either transform or destroy the controlled substance, or sell the controlled substance for transformation or destruction in cases when production and consumption allowances were not expended;

(xiv) Written verifications that essential-use allowances were conveyed to the producer for the production of

specified quantities of a specific controlled substance that will only be used for the named essential-use and not resold or used in any other manufacturing process;

(xv) Written certifications that quantities of controlled substances, meeting the purity criteria in appendix G of this subpart, were purchased by distributors of laboratory supplies or by laboratory customers to be used only in essential laboratory and analytical uses as defined by appendix G, and not to be resold or used in manufacturing;

(xvi) [Reserved]

(xvii) For methyl bromide, dated records of the quantity of controlled substances produced for quarantine and preshipment applications and quantity sold for quarantine and preshipment applications;

(xviii) Written certifications that quantities of methyl bromide produced solely for quarantine and preshipment applications were purchased by distributors or applicators to be used only for quarantine applications and preshipment applications in accordance with the definitions in this subpart; and

(xix) Written verifications from a U.S. purchaser that methyl bromide produced solely for quarantine and preshipment applications, if exported, will be exported solely for quarantine applications and preshipment applications upon receipt of a certification in accordance with the definitions of this subpart and requirements in paragraph (h) of this section.

(xx) For methyl bromide, dated records such as invoices and order forms, and a log of the quantity of controlled substances produced for critical use, specifying quantities dedicated for pre-plant use and quantities dedicated for post-harvest use, and the quantity sold for critical use, specifying quantities dedicated for pre-plant use and quantities dedicated for post-harvest use;

(xxi) Written certifications that quantities of methyl bromide produced for critical use were purchased by distributors, applicators, or approved critical users to be used or sold only for critical use in accordance with the definitions and prohibitions in this

Environmental Protection Agency

§ 82.13

subpart. Certifications must be maintained by the producer for a minimum of three years; and

(xxii) For methyl bromide, dated records such as invoices and order forms, and a log of the quantity of controlled substances produced solely for export to satisfy critical uses authorized by the Parties for that control period, and the quantity sold solely for export to satisfy critical uses authorized by the Parties for that control period.

(3) *Reporting requirements—producers.* For each quarter, except as specified below, each producer of a class I controlled substance must provide the Administrator with a report containing the following information:

(i) The production by company in that quarter of each controlled substance, specifying the quantity of any controlled substance used in processing, resulting in its transformation by the producer;

(ii) The amount of production for use in processes resulting in destruction of controlled substances by the producer;

(iii) The levels of production (expended allowances and credits) for each controlled substance;

(iv) [Reserved]

(v) The amount of controlled substance sold or transferred during the quarter to a person other than the producer for use in processes resulting in its transformation or eventual destruction;

(vi) A list of the quantities and names of controlled substances exported, by the producer and or by other U.S. companies, to a Party to the Protocol that will be transformed or destroyed and therefore were not produced expending production or consumption allowances;

(vii) For transformation in the United States or by a person of another Party, one copy of an IRS certification of intent to transform the same controlled substance for a particular transformer and a list of additional quantities shipped to that same transformer for the quarter;

(viii) For destruction in the United States or by a person of another Party, one copy of a destruction verification (as under § 82.13(k)) for a particular destroyer, destroying the same controlled

substance, and a list of additional quantities shipped to that same destroyer for the quarter;

(ix) [Reserved]

(x) A list of the essential-use allowance holders, distributors of laboratory supplies and laboratory customers from whom orders were placed and the quantity of specific essential-use controlled substances requested and produced;

(xi) The certifications from essential-use allowance holders stating that the controlled substances were purchased solely for specified essential uses and will not be resold or used in any other manufacturing process;

(xii) In the case of laboratory essential-uses, certifications from distributors of laboratory supplies that controlled substances were purchased for sale to laboratory customers who certify that the substances will only be used for essential laboratory and analytical uses as defined by appendix G of this subpart, and will not be resold or used in manufacturing; or, if sales are made directly to laboratories, certification from laboratories that the controlled substances will only be used for essential laboratory and analytical uses (defined at appendix G of this subpart) and will not be resold or used in manufacturing.

(xiii) The amount of methyl bromide sold or transferred during the quarter to a person other than the producer solely for quarantine and preshipment applications;

(xiv) A list of the quantities of methyl bromide produced by the producer and exported by the producer and/or by other U.S. companies, to a Party to the Protocol that will be used solely for quarantine and preshipment applications and therefore were not produced expending production or consumption allowances; and

(xv) For quarantine and preshipment applications of methyl bromide in the United States or by a person of another Party, one copy of a certification that the material will be used only for quarantine and preshipment applications in accordance with the definitions in this subpart from each recipient of the material and a list of additional quantities shipped to that same person for the quarter.

(xvi) For critical uses of methyl bromide, producers shall report annually the amount of critical use methyl bromide owned by the reporting entity, specifying quantities dedicated for pre-plant use and quantities dedicated for post-harvest use, as well as quantities held by the reporting entity on behalf of another entity, specifying quantities dedicated for pre-plant use and quantities dedicated for post-harvest use along with the name of the entity on whose behalf the material is held; and

(xvii) A list of the quantities of methyl bromide produced by the producer and exported by the producer and/or by other U.S. companies in that control period, solely to satisfy the critical uses authorized by the Parties for that control period; and

(xviii) On an annual basis, the amount of methyl bromide produced or imported prior to the January 1, 2005, phaseout date owned by the reporting entity, as well as quantities held by the reporting entity on behalf of another entity, specifying the name of the entity on whose behalf the material is held.

(4) For any person who fails to maintain the records required by this paragraph, or to submit the report required by this paragraph, the Administrator may assume that the person has produced at full capacity during the period for which records were not kept, for purposes of determining whether the person has violated the prohibitions at § 82.4.

(g) *Importers.* Importers of class I controlled substances during a control period must comply with record-keeping and reporting requirements specified in this paragraph (g).

(1) *Recordkeeping—importers.* Any importer of a class I controlled substance (including used, recycled and reclaimed controlled substances) must maintain the following records:

(i) The quantity of each controlled substance imported, either alone or in mixtures, including the percentage of each mixture which consists of a controlled substance;

(ii) The quantity of those controlled substances imported that are used (including recycled or reclaimed) and, where applicable, the information pro-

vided with the petition as under paragraph (g)(2) of this section;

(iii) The quantity of controlled substances other than transshipments or used, recycled or reclaimed substances imported for use in processes resulting in their transformation or destruction and quantity sold for use in processes that result in their destruction or transformation;

(iv) The date on which the controlled substances were imported;

(v) The port of entry through which the controlled substances passed;

(vi) The country from which the imported controlled substances were imported;

(vii) The commodity code for the controlled substances shipped, which must be one of those listed in Appendix K to this subpart;

(viii) The importer number for the shipment;

(ix) A copy of the bill of lading for the import;

(x) The invoice for the import;

(xi) The quantity of imports of used, recycled, or reclaimed class I controlled substances;

(xii) The U.S. Customs entry number;

(xiii) Dated records documenting the sale or transfer of controlled substances for use in processes resulting in transformation or destruction;

(xiv) Copies of IRS certifications that the controlled substance will be transformed or destruction verifications that it will be destroyed (as in § 82.13(k));

(xv) Dated records of the quantity of controlled substances imported for an essential use; and

(xvi) Copies of certifications that imported controlled substances are being purchased for essential laboratory and analytical uses (defined at appendix G of this subpart) or being purchased for eventual sale to laboratories that certify that controlled substances are for essential laboratory and analytical uses (defined at appendix G of this subpart).

(xvii) Dated records of the quantity of methyl bromide imported for quarantine and preshipment applications and quantity sold for quarantine and preshipment applications;

(xviii) Written certifications that quantities of methyl bromide imported

solely for quarantine and preshipment applications were purchased by distributors or applicators to be used only for quarantine and preshipment applications in accordance with the definitions in this subpart; and

(xix) Written verifications from a U.S. purchaser that methyl bromide imported solely for quarantine and preshipment applications, if exported, will be exported solely for quarantine and preshipment applications upon receipt of a certification in accordance with the definitions of this subpart and requirements in paragraph (h) of this section.

(xx) For methyl bromide, dated records such as invoices and order forms, of the quantity of controlled substances imported for critical use, specifying quantities dedicated for pre-plant use and quantities dedicated for post-harvest use, and the quantity sold for critical use, specifying quantities dedicated for pre-plant use and quantities dedicated for post-harvest use; and

(xxi) Written certifications that quantities of methyl bromide imported for critical use were purchased by distributors, applicators, or approved critical users to be used or sold only for critical use in accordance with the definitions and prohibitions in this subpart. Certifications must be maintained by an importer for a minimum of three years.

(2) *Petitioning—importers of used, recycled, or reclaimed controlled substances.* For each individual shipment over 5 pounds of a used controlled substance as defined in § 82.3, except for Group II used controlled substances shipped in aircraft halon bottles for hydrostatic testing and imports intended for destruction, an importer must submit directly to the Administrator, at least 40 working days before the shipment is to leave the foreign port of export, the following information in a petition:

(i) Name, commodity code, and quantity in kilograms of the used controlled substance to be imported;

(ii) Name and address of the importer, the importer ID number, and the contact person's name, email address, and phone number;

(iii) Name, address, contact person, email address, and phone number of all

previous source facilities from which the used controlled substance was recovered or the halon bank storing the controlled substance;

(iv) A detailed description of the previous use of the controlled substance at each source facility and a best estimate of when the specific controlled substance was put into the equipment at each source facility, and, when possible, documents indicating the date the material was put into the equipment;

(v) A list of the name, make and model number of the equipment from which the material was recovered at each source facility;

(vi) Name, address, contact person, email address, and phone number of the exporter and of all persons to whom the material was transferred or sold after it was recovered from the source facility;

(vii) The U.S. port of entry for the import, the expected date of shipment and the vessel transporting the chemical. If at the time of submitting a petition the importer does not know the U.S. port of entry, the expected date of shipment and the vessel transporting the chemical, and the importer receives a non-objection notice for the individual shipment in the petition, the importer is required to notify the Administrator of this information prior to the actual U.S. Customs entry of the individual shipment;

(viii) A description of the intended use of the used controlled substance, and, when possible, the name, address, contact person, email address, and phone number of the ultimate purchaser in the United States;

(ix) Name, address, contact person, email address, and phone number of the U.S. reclamation facility, where applicable;

(x) If someone at the source facility recovered the controlled substance from the equipment, the name, email address, and phone number of that person;

(xi) If the imported controlled substance was reclaimed in a foreign Party, the name, address, contact person, email address, and phone number of any or all foreign reclamation facility(ies) responsible for reclaiming the cited shipment;

(xii) The export license, application for an export license, or official communication acknowledging the export from the appropriate government agency in the country of export and, if recovered in another country, the export license or official communication from the appropriate government agency in that country, and quantity authorized for export in kilograms on the export license, and an English translation of these documents;

(xiii) If the imported used controlled substance is intended to be sold as a refrigerant in the United States, the name, address, and email address of the EPA-certified U.S. reclaimer who will bring the material to the standard required under subpart F of this part if not already reclaimed to those specifications; and

(xiv) [Reserved]

(xv) If the used controlled substance is stored in a halon bank, in lieu of the information required in paragraphs (g)(2)(iv) through (vi) of this section, the petitioner may provide an official letter from the appropriate government agency in the country where the material is stored indicating that the halon is used and that the halon bank is authorized to collect used halon. If source information in paragraphs (g)(2)(iv) through (vi) is available, it should also be provided in addition to the letter.

(3) *Review of petition to import a used substance.* Starting on the first working day following receipt by the Administrator of a petition to import a used class I controlled substance, the Administrator will initiate a review of the information submitted under paragraph (g)(2) of this section and take action within 40 working days to issue either an objection-notice or a non-objection notice for the individual shipment to the person who submitted the petition to import the used class I controlled substance.

(i) For the following reasons, the Administrator may issue an objection notice to a petition:

(A) If the Administrator determines that the information is insufficient, that is, if the petition lacks or appears to lack any of the information required under paragraph (g)(2) of this section or other information that may be re-

quested during the review of the petition necessary to verify that the controlled substance is used;

(B) If the Administrator determines that any portion of the petition contains false or misleading information, or the Administrator has information from other U.S. or foreign government agencies indicating that the petition contains false or misleading information;

(C) If the importer wishes to import a used class I controlled substance from a country which is, for that particular controlled substance, out of compliance regarding its phaseout obligations under the Protocol or the transaction in the petition is contrary to other provisions in the Vienna Convention or the Montreal Protocol;

(D) If the appropriate government agency in the exporting country has not agreed to issue an export license for the cited individual shipment of used controlled substance;

(E) If allowing the import of the used class I controlled substance would run counter to government restrictions from either the country of recovery or export regarding controlled ozone-depleting substances;

(F) If reclamation capacity is installed or is being installed for that specific controlled substance in the country of recovery or country of export and the capacity is funded in full or in part through the Multilateral Fund.

(ii) Within ten (10) working days after receipt of the objection notice, the importer may re-petition the Administrator, only if the Administrator indicated “insufficient information” as the basis for the objection notice. If no appeal is taken by the tenth working day after the date on the objection notice, the objection shall become final. Only one appeal of re-petition will be accepted for any petition received by EPA.

(iii) Any information contained in the re-petition which is inconsistent with the original petition must be identified and a description of the reason for the inconsistency must accompany the re-petition.

(iv) In cases where the Administrator does not object to the petition based on the criteria listed in paragraph (g)(3)(i)

Environmental Protection Agency

§ 82.13

of this section, the Administrator will issue a non-objection notice.

(v) To pass the approved used class I controlled substances through U.S. Customs, the non-objection notice issued by EPA must accompany the shipment through U.S. Customs.

(vi) If for some reason, following EPA's issuance of a non-objection notice, new information is brought to EPA's attention which shows that the non-objection notice was issued based on false information, then EPA has the right to:

(A) Revoke the non-objection notice;

(B) Pursue all means to ensure that the controlled substance is not imported into the United States; and

(C) Take appropriate enforcement actions.

(vii) A person receiving the non-objection notice is permitted to import the individual shipment only within one year of the date stamped on the non-objection notice.

(viii) A person receiving a non-objection notice from the Administrator for a petition to import used class I controlled substances must maintain the following records:

(A) a copy of the petition;

(B) the EPA non-objection notice;

(C) the bill of lading for the import; and

(D) The U.S. Customs entry number.

(4) *Reporting requirements—importers.* For each quarter, except as specified below, every importer of a class I controlled substance (including importers of used, recycled or reclaimed controlled substances) must submit to the Administrator a report containing the following information:

(i) Summaries of the records required in paragraphs (g)(1) (i) through (xvi) of this section for the previous quarter;

(ii) The total quantity imported in kilograms of each controlled substance for that quarter;

(iii) The quantity of those controlled substances imported that are used controlled substances.

(iv) The levels of import (expended consumption allowances before January 1, 1996) of controlled substances for that quarter and totaled by chemical for the control-period-to-date;

(vii) [Reserved]

(viii) The amount of controlled substances imported for use in processes resulting in their transformation or destruction;

(ix) The amount of controlled substances sold or transferred during the quarter to each person for use in processes resulting in their transformation or eventual destruction;

(x) The amount of controlled substances sold or transferred during the quarter to each person for an essential use;

(xi) [Reserved]

(xii) Internal Revenue Service Certificates showing that the purchaser or recipient of imported controlled substances intends to transform those substances or destruction verifications (as in § 82.13(k)) showing that purchaser or recipient intends to destroy the controlled substances; and

(xiii) The certifications from essential-use allowance holders stating that the controlled substances were purchased solely for specified essential-uses and will not be resold or used in manufacturing; and the certifications from distributors of laboratory supplies that the controlled substances were purchased solely for eventual sale to laboratories that certify the controlled substances are for essential laboratory and analytical uses (defined at appendix G of this subpart), or if sales are made directly to laboratories, certifications from laboratories that the controlled substances will only be used for essential laboratory and analytical uses (defined at appendix G of this subpart) and will not be resold or used in manufacturing.

(xiv) In the case of laboratory essential uses, a certification from distributors of laboratory supplies that controlled substances were purchased for sale to laboratory customers who certify that the substances will only be used for laboratory applications and will not be resold or used in manufacturing; and

(xv) The amount of methyl bromide sold or transferred during the quarter to a person other than the importer solely for quarantine and preshipment applications;

(xvi) A list of the quantities of methyl bromide exported by the importer and or by other U.S. companies, to a

Party to the Protocol that will be used solely for quarantine and preshipment applications and therefore were not imported expending consumption allowances; and

(xvii) For quarantine and preshipment applications of methyl bromide in the United States or by a person of another Party, one copy of a certification that the material will be used only for quarantine and preshipment applications in accordance with the definitions in this subpart from each recipient of the material and a list of additional quantities shipped to that same person for the quarter.

(xviii) For critical uses of methyl bromide, importers shall report annually the amount of critical use methyl bromide owned by the reporting entity, specifying quantities dedicated for pre-plant use and quantities dedicated for post-harvest use, as well as quantities held by the reporting entity on behalf of another entity, specifying quantities dedicated for pre-plant use and quantities dedicated for post-harvest use along with the name of the entity on whose behalf the material is held.

(xix) Importers shall report annually the amount of methyl bromide produced or imported prior to the January 1, 2005, phaseout date owned by the reporting entity, as well as quantities held by the reporting entity on behalf of another entity, specifying the name of the entity on whose behalf the material is held.

(5) *Certification of intent to import for destruction.* For each individual shipment of a class I controlled substance imported with the intent to destroy that substance, an importer must submit electronically to the Administrator, at least 30 working days before the shipment is to leave the foreign port of export, the following information:

(i) Name, commodity code, and quantity in kilograms of each controlled substance to be imported;

(ii) Name and address of the importer, the importer ID number, and the contact person's name, email address, and phone number;

(iii) Name and address of any intermediary who will aggregate controlled substances imported for destruction,

and the contact person's name, email address, and phone number;

(iv) The U.S. port of entry for the import, the expected date of shipment and the vessel transporting the material. If at the time of submitting the certification of intent to import for destruction the importer does not know the U.S. port of entry, the expected date of shipment and the vessel transporting the material, and the importer receives a non-objection notice for the individual shipment in the petition, the importer is required to notify the Administrator of this information prior to the entry of the individual shipment into the United States;

(v) Name, address, contact person, email address, and phone number of the responsible party at the destruction facility;

(vi) The export license, application for an export license, or official communication acknowledging the export from the appropriate government agency in the country of export and, if recovered in another country, the export license or official communication from the appropriate government agency in that country, and quantity authorized for export in kilograms on the export license, and an English translation of these documents; and

(vii) A certification of accuracy of the information submitted in the certification.

(6) *Destruction verification.* For each individual shipment of a class I controlled substance imported with the intent to destroy that substance, an importer must submit to the Administrator a copy of the destruction verification within 30 days after destruction of the controlled substance(s).

(7) *Review of certification of intent to import for destruction.* (i) Starting on the first working day following receipt by the Administrator of a certification of intent to import a class I controlled substance for destruction, the Administrator will initiate a review of the information submitted under paragraph (g)(5) of this section and take action within 30 working days to issue either an objection notice or a non-objection notice for the individual shipment to

Environmental Protection Agency

§ 82.13

the person who submitted the certification of intent to import the class I controlled substance for destruction.

(ii) The Administrator may issue an objection notice if the petition lacks or appears to lack any of the information required under paragraph (g)(5) of this section or for the reasons listed in paragraphs (g)(3)(i)(B) through (F) of this section.

(iii) In cases where the Administrator does not object to the petition, the Administrator will issue a non-objection notice.

(iv) To pass the approved class I controlled substances through U.S. Customs, the non-objection notice issued by EPA must accompany the shipment through U.S. Customs.

(v) If for some reason, following EPA's issuance of a non-objection notice, new information is brought to EPA's attention which shows that the non-objection notice was issued based on false information, then EPA has the right to:

(A) Revoke the non-objection notice;

(B) Pursue all means to ensure that the class I controlled substance is not imported into the United States; and

(C) Take appropriate enforcement actions.

(8) *Timing of import.* A person receiving the non-objection notice is permitted to import the individual shipment only within one year of the date stamped on the non-objection notice.

(9) *Additional recordkeeping requirements—importers of used, recycled, or reclaimed controlled substances.* A person receiving a non-objection notice from the Administrator for a certification of intent to import class I controlled substances for destruction must maintain the following records:

(i) A copy of the certificate of intent to import for destruction;

(ii) The EPA non-objection notice;

(iii) A copy of the export license, export license application, or official communication from the appropriate government agency in the country of export;

(iv) U.S. Customs entry documents for the import that must include one of the commodity codes from appendix K to this subpart;

(v) The date, amount, and type of controlled substance sent for destruction, per shipment;

(vi) An invoice from the destruction facility verifying the shipment was received;

(vii) A copy of the destruction verification from the destruction facility; and

(viii) An English translation of the document in paragraph (g)(9)(iii) of this section.

(10) *Recordkeeping requirements—aggregators.* A person identified in paragraph (g)(5)(iii) of this section as aggregating a controlled substance prior to destruction must:

(i) Maintain transactional records that include the name and address of the entity from whom they received the controlled substance imported for destruction;

(ii) Maintain transactional records that include the name and address of the entity to whom they sent the controlled substance imported for destruction;

(iii) Maintain records that include the date and quantity of the imported controlled substance received for destruction;

(iv) Maintain records that include the date and quantity of the imported controlled substance sent for destruction; and

(v) If the person is the final aggregator of such a controlled substance before the material is destroyed, maintain a copy of the destruction verification.

(h) *Reporting requirements—exporters.*

(1) For any exports of class I controlled substances (except methyl bromide) not reported under paragraph (f)(3) of this section (reporting for producers of controlled substances), the exporter who exported a class I controlled substance (except methyl bromide) must submit to the Administrator the following information within 45 days after the end of the control period in which the unreported exports left the United States:

(i) The names and addresses of the exporter and the recipient of the exports;

(ii) The exporter's Employer Identification Number;

(iii) The type and quantity of each controlled substance exported including the quantity of controlled substance that is used, recycled, or reclaimed;

(iv) The date on which, and the port from which, the controlled substances were exported from the United States or its territories;

(v) The country to which the controlled substances were exported;

(vi) The amount exported to each Article 5 country;

(vii) The commodity code of the controlled substance shipped; and

(viii) The invoice or sales agreement containing language similar to the Internal Revenue Service Certificate that the purchaser or recipient of imported controlled substances intends to transform those substances, or destruction verifications (as in paragraph (k) of this section) showing that the purchaser or recipient intends to destroy the controlled substances.

(2) For any exports of methyl bromide not reported under paragraph (f)(3) of this section (reporting for producers of controlled substances), the exporter who exported methyl bromide must submit to the Administrator the following information within 45 days after the end of each quarter in which the unreported exports left the United States:

(i) The names and addresses of the exporter and the recipient of the exports;

(ii) The exporter's Employer Identification Number;

(iii) The quantity of methyl bromide exported by use (transformation, destruction, critical use, or quarantine and preshipment);

(iv) The date on which, and the port from which, the methyl bromide was exported from the United States or its territories;

(v) The country to which the methyl bromide was exported;

(vi) The amount exported to each Article 5 country;

(vii) The commodity code of the controlled substance shipped; and

(viii) The invoice or sales agreement containing language similar to the Internal Revenue Service Certificate that the purchaser or recipient of imported methyl bromide intends to transform

those substances, the destruction verifications (as in paragraph (k) of this section) showing that the purchaser or recipient intends to destroy the controlled substances, or the certification that the purchaser or recipient and the eventual applicator will only use the material for quarantine and preshipment applications in accordance with the definitions in this subpart.

(i) [Reserved]

(j) Persons who destroy class I controlled substances shall, following promulgation of this rule, provide EPA with a one-time report stating the destruction unit's destruction efficiency and the methods used to record the volume destroyed and those used to determine destruction efficiency and the name of other relevant federal or state regulations that may apply to the destruction process. Any changes to the unit's destruction efficiency or methods used to record volume destroyed and to determine destruction efficiency must be reflected in a revision to this report to be submitted to EPA within 60 days of the change.

(k) Persons who purchase or receive and subsequently destroy controlled class I substances that were originally produced without expending allowances shall provide the producer or importer from whom they purchased or received the controlled substances with a verification that controlled substances will be used in processes that result in their destruction.

(1) The destruction verification shall include the following:

(i) Identity and address of the person intending to destroy controlled substances;

(ii) Indication of whether those controlled substances will be completely destroyed, as defined in § 82.3 of this rule, or less than completely destroyed, in which case the destruction efficiency at which such substances will be destroyed must be included;

(iii) Period of time over which the person intends to destroy controlled substances; and

(iv) Signature of the verifying person.

(2) If, at any time, any aspects of this verification change, the person must submit a revised verification reflecting

such changes to the producer from whom that person purchases controlled substances intended for destruction.

(l) Persons who purchase class I controlled substances and who subsequently transform such controlled substances shall provide the producer or importer with the IRS certification that the controlled substances are to be used in processes resulting in their transformation.

(m) Any person who transforms or destroys class I controlled substances who has submitted an IRS certificate of intent to transform or a destruction verification (as under paragraph (k) of this section) to the producer or importer of the controlled substance, must report the names and quantities of class I controlled substances transformed and destroyed for each control period within 45 days of the end of such control period.

(n) Persons who import or export used controlled substances (including recycled or reclaimed) must label their bill of lading or invoice indicating that the controlled substance is used, recycled or reclaimed.

(o) Persons who import heels of controlled substances must label their bill of lading or invoice indicating that the controlled substance in the container is a heel.

(p) Every person who brings back a container with a heel to the United States, as defined in § 82.3, must report quarterly the amount brought into the United States certifying that the residual amount in each shipment is less than 10 percent of the volume of the container and will either:

- (1) Remain in the container and be included in a future shipment;
- (2) Be recovered and transformed;
- (3) Be recovered and destroyed; or
- (4) Be recovered for a non-emissive use.

(q) Every person who brings a container with a heel into the United States must report on the final disposition of each shipment within 45 days of the end of the control period.

(r) Every person who transships a controlled substance must maintain records that indicate that the controlled substance shipment originated in a foreign country destined for another foreign country, and does not

enter interstate commerce with the United States.

(s) Any person allocated essential-use allowances who submits an order to a producer or importer for a controlled substance must report the quarterly quantity received from each producer or importer.

(t) Any distributor of laboratory supplies receiving controlled substances under the global laboratory essential-use exemption for sale to laboratory customers must report quarterly the quantity received of each controlled substance from each producer or importer.

(u) Holders of Essential-Use Allowances—Reporting.

(1) Within 30 days of the end of every quarter, any person allocated essential-use allowances must submit to the Administrator a report containing the quantity of each controlled substance, in kilograms, purchased and received from each producer and each importer during that quarter as well as from which country the controlled substance was imported.

(2) Any person allocated essential-use allowances must submit to the Administrator a report containing the following information within 30 days of the end of the control period, and, if possible, within 20 days of the end of the control period:

(i) The gross quantity of each controlled substance, in kilograms, that was used for the essential use during the control period; and

(ii) The quantity of each controlled substance, in kilograms, contained in exported products during the control period; and

(iii) The quantity of each controlled substance, in kilograms, that was destroyed or recycled during the control period; and

(iv) The quantity of each controlled substance, in kilograms, held in inventory as of the last day of the control period, that was acquired with essential use allowances in all control periods (*i.e.* quantity on hand at the end of the year); and

(v) The quantity of each controlled substance, in kilograms, in a stockpile that is owned by the company or is being held on behalf of the company under contract, and was produced or

imported through the use of production allowances and consumption allowances prior to the phaseout (*i.e.* class I ODSs produced before their phaseout dates); and

(vi) For essential use allowances for metered-dose inhalers only, the allowance holder must report the total number of marketable units of each specific metered-dose inhaler product manufactured in the control period.

(v) *Laboratory use exemption distributors.* Any distributor of laboratory supplies who purchased controlled substances under the global essential laboratory and analytical use exemption must submit quarterly (except distributors following procedures in paragraph (x) of this section) the quantity of each controlled substance purchased by each laboratory customer or distributor whose certification was previously provided to the distributor pursuant to paragraph (w) of this section, the contact information for the source company from which material was purchased, and the laboratories to whom the material is sold.

(w) *Laboratory use exemption customers.* A laboratory customer purchasing a controlled substance under the global essential laboratory and analytical use exemption must provide the producer, importer or distributor with a one-time-per-year certification for each controlled substance that the substance will only be used for essential laboratory and analytical uses (defined at appendix G of this subpart) and not be resold or used in manufacturing.

(1) The identity and address of the laboratory customer;

(2) The name, email address, and phone number of a contact person for the laboratory customer;

(3) The name and quantity of each controlled substance purchased, and the estimated percent of the controlled substance that will be used for each listed type of laboratory application.

(x) Any distributor of laboratory supplies who purchased class I controlled substances under the global essential laboratory and analytical use exemption, and who only sells the class I controlled substances as reference standards for calibrating laboratory analytical equipment, may write a letter to the Administrator requesting permis-

sion to submit the reports required under paragraph (v) of this section annually rather than quarterly. The Administrator will review the request and issue a notification of permission to file annual reports if, in the Administrator's judgment, the distributor meets the requirements of this paragraph. Upon receipt of a notification of extension from the Administrator, the distributor must submit annually the quantity of each controlled substance purchased by each laboratory customer whose certification was previously provided to the distributor pursuant to paragraph (w) of this section.

(y) *Quarantine and preshipment methyl bromide distributors.* Every distributor of methyl bromide who purchases or receives a quantity produced or imported for quarantine or preshipment applications under the exemptions in this subpart must comply with the following recordkeeping and reporting requirements:

(1) Every distributor of quarantine and preshipment methyl bromide must certify to the producer, importer, or distributor from whom they purchased or received the controlled substance that quantities purchased or received will be sold only for quarantine applications or preshipment applications in accordance with the definitions in this subpart.

(2) Every distributor of quarantine and preshipment methyl bromide must receive from an applicator, exporter, or distributor to whom they sell or deliver the controlled substance a certification, prior to delivery, stating that the quantity will be used or sold solely for quarantine applications or preshipment applications in accordance with definitions in this subpart.

(3) Every distributor of quarantine and preshipment methyl bromide must maintain the certifications as records for 3 years.

(4) Every distributor of quarantine and preshipment methyl bromide must report to the Administrator within 45 days after the end of each quarter, the total quantity delivered to applicators or end users for quarantine applications and preshipment applications in accordance with definitions in this subpart.

(z) *Quarantine and preshipment methyl bromide applicators.* Every applicator of methyl bromide who purchases or receives a quantity produced or imported solely for quarantine or preshipment applications under the exemptions in this subpart must comply with the following recordkeeping and reporting requirements:

(1) *Recordkeeping.* Every applicator of methyl bromide produced or imported for quarantine and preshipment applications under the exemptions of this subpart must maintain, for every application, a document from the commodity owner, shipper, or their agent requesting the use of methyl bromide citing the requirement that justifies its use in accordance with definitions in this subpart. These documents shall be retained for 3 years.

(2) *Reporting.* Every applicator who purchases or receives methyl bromide that was produced or imported for quarantine and preshipment applications under the exemptions in this subpart shall provide the distributor of the methyl bromide, prior to shipment, with a certification that the methyl bromide will be used only for quarantine applications or preshipment applications as defined in this subpart.

(aa) *Quarantine and preshipment methyl bromide end user certification.* Every commodity owner, shipper or their agent requesting an applicator to use methyl bromide that was produced or imported solely for quarantine and preshipment applications under the exemptions of this subpart must maintain a record for 3 years, for each request, certifying knowledge of the requirements associated with the exemption for quarantine and preshipment applications in this subpart and citing the requirement that justifies its use. The record must include the following statement: "I certify knowledge of the requirements associated with the exempted quarantine and preshipment applications published in 40 CFR part 82, including the requirement that this letter cite the treatments or official controls for quarantine applications or the official requirements for preshipment requirements."

(bb) Every distributor of methyl bromide (class I, Group VI controlled substances) who purchases or receives a

quantity of critical use methyl bromide must comply with recordkeeping and reporting requirements specified in this paragraph (bb).

(1) *Recordkeeping*—Every distributor of critical use methyl bromide must certify to the producer or importer or other entity from which they are acquiring quantities of critical use methyl bromide that such quantities received will be sold or used only for approved critical use(s) in accordance with the definitions and prohibitions in this subpart.

(i) Every distributor of a quantity of critical use methyl bromide must receive from an applicator, or any other entity to whom they sell critical use methyl bromide, a certification of the quantity of critical use methyl bromide ordered, prior to delivery of the quantity, stating that the quantity will be sold or used only for approved critical uses in accordance with definitions and prohibitions in this subpart.

(ii) Every distributor of methyl bromide who receives a certification from an applicator or any other entity to which they sell critical use methyl bromide must maintain the certifications as records for 3 years.

(iii) Every distributor of a quantity of critical use methyl bromide must maintain invoice and order records related to the sale of such material for 3 years.

(2) *Reporting*—Every distributor of critical use methyl bromide must report to the Administrator annually, the following items:

(i) For critical uses of class I, Group VI controlled substances, an annual list of the amount of critical use methyl bromide bought;

(ii) For critical uses of class I, Group VI controlled substances, an annual list of the amount of critical use methyl bromide sold for each specified critical use in Appendix L of this subpart;

(iii) For critical uses of class I, Group VI controlled substances, report the amount of critical use methyl bromide owned by the reporting entity, specifying quantities dedicated for pre-plant use and quantities dedicated for post-harvest use, as well as quantities held by the reporting entity on behalf of another entity, specifying quantities

dedicated for pre-plant use and quantities dedicated for post-harvest use, along with the name of the entity on whose behalf the material is held;

(iv) [Reserved]

(v) The amount of methyl bromide produced or imported prior to the January 1, 2005, phaseout date owned by the reporting entity, as well as quantities held by the reporting entity on behalf of another entity, specifying the name of the entity on whose behalf the material is held.

(cc) Every third party applicator of methyl bromide (class I, Group VI controlled substances) that purchases or receives critical use methyl bromide must comply with recordkeeping and reporting requirements specified in this paragraph (cc).

(1) Recordkeeping—Every third party applicator of critical use methyl bromide must certify to the producer or importer or other entity from which they are acquiring quantities of critical use methyl bromide that such quantities received will be sold or used only for approved critical use(s) in accordance with the definitions and prohibitions in this subpart.

(i) Every third party applicator of a quantity of critical use methyl bromide must receive from any entity to whom they sell critical use methyl bromide, a certification of the quantity of critical use methyl bromide ordered, prior to delivery of the quantity, stating that the quantity will be sold or used only for approved critical uses in accordance with definitions and prohibitions in this subpart.

(ii) Every third party applicator of methyl bromide who receives a certification from an entity to which they sell critical use methyl bromide must maintain the certifications as records for 3 years.

(iii) Every third party applicator of a quantity of critical use methyl bromide must maintain invoice and order records related to the sale of such material for 3 years.

(2) Reporting—Every third party applicator of critical use methyl bromide must report to the Administrator annually, the following items:

(i) For critical uses of class I, Group VI controlled substances, an annual

list of the amount of critical use methyl bromide bought;

(ii) For critical uses of class I, Group VI controlled substances, an annual list of the amount of critical use methyl bromide sold for each specified critical use in Appendix L of this subpart;

(iii) For critical uses of class I, Group VI controlled substances, report annually the amount of critical use methyl bromide owned by the reporting entity, specifying quantities dedicated for pre-plant use and quantities dedicated for post-harvest use, as well as quantities held by the reporting entity on behalf of another entity, specifying quantities dedicated for pre-plant use and quantities dedicated for post-harvest use, along with the name of the entity on whose behalf the material is held;

(iv) [Reserved]

(v) The amount of methyl bromide produced or imported prior to the January 1, 2005 phaseout date owned by the reporting entity, as well as quantities held by the reporting entity on behalf of another entity, specifying the name of the entity on whose behalf the material is held.

(dd) Every approved critical user purchasing an amount of critical use methyl bromide or purchasing fumigation services with critical use methyl bromide must, for each request, identify the use as a critical use and certify being an approved critical user. The approved critical user certification will state, in part: “I certify, under penalty of law, I am an approved critical user and I will use this quantity of methyl bromide for an approved critical use. My action conforms to the requirements associated with the critical use exemption published in 40 CFR part 82. I am aware that any agricultural commodity within a treatment chamber, facility or field I fumigate with critical use methyl bromide cannot subsequently or concurrently be fumigated with non-critical use methyl bromide during the same control period, excepting a QPS treatment or a treatment for a different use (e.g., a different crop or commodity). I will not use this quantity of methyl bromide for a treatment chamber, facility, or field that I previously fumigated with non-critical use methyl bromide during the same control period, excepting a QPS treatment

or a treatment for a different use (*e.g.*, a different crop or commodity), unless a local township limit now prevents me from using methyl bromide alternatives or I have now become an approved critical user as a result of rule-making.” The certification will also identify the type of critical use methyl bromide purchased, the location of the treatment, the crop or commodity treated, the quantity of critical use methyl bromide purchased, and the acreage/square footage treated, and will be signed and dated by the approved critical user.

[60 FR 24986, May 10, 1995]

EDITORIAL NOTE: For FEDERAL REGISTER citations affecting § 82.13, see the List of CFR Sections Affected, which appears in the Finding Aids section of the printed volume and at www.govinfo.gov.

§ 82.14 Process for electronic reporting.

(a) Starting May 18, 2020, reports and petitions that are available to be submitted through the Central Data Exchange, as well as any related supporting documents, must be submitted through that tool.

(b) Entities can register and access the Central Data Exchange as follows:

(1) Go to EPA’s Central Data Exchange website at <https://cdx.epa.gov> and follow the links for the submission of ozone-depleting substances.

(2) Call EPA’s Central Data Exchange Help Desk at 1-888-890-1995.

(3) Email the EPA’s Central Data Exchange Help Desk at HelpDesk@epacdx.net.

[85 FR 15296, Mar. 17, 2020]

§ 82.15 Prohibitions for class II controlled substances.

(a) *Production.* (1) Effective January 21, 2003, no person may produce class II controlled substances for which EPA has apportioned baseline production and consumption allowances, in excess of the quantity of unexpended production allowances, unexpended Article 5 allowances, unexpended export production allowances, or conferred unexpended HCFC-141b exemption allowances held by that person for that substance under the authority of this subpart at that time in that control pe-

riod, unless the substances are transformed or destroyed domestically or by a person of another Party, or unless they are produced using an exemption granted in paragraph (f) of this section. Every kilogram of excess production constitutes a separate violation of this subpart.

(2) Effective January 21, 2003, no person may use production allowances to produce a quantity of class II controlled substance unless that person holds under the authority of this subpart at the same time consumption allowances sufficient to cover that quantity of class II controlled substances. No person may use consumption allowances to produce a quantity of class II controlled substances unless the person holds under authority of this subpart at the same time production allowances sufficient to cover that quantity of class II controlled substances.

(b) *Import.* (1) Effective January 21, 2003, no person may import class II controlled substances (other than transshipments, heels or used class II controlled substances) for which EPA has apportioned baseline production and consumption allowances, in excess of the quantity of unexpended consumption allowances, or conferred unexpended HCFC-141b exemption allowances held by that person under the authority of this subpart at that time in that control period, unless the substances are for use in a process resulting in their transformation or their destruction, or unless they are produced using an exemption granted in paragraph (f) of this section. Every kilogram of excess import constitutes a separate violation of this subpart.

(2) Effective January 21, 2003, no person may import, at any time in any control period, a used class II controlled substance for which EPA has apportioned baseline production and consumption allowances, without having submitted a petition to the Administrator and received a non-objection notice in accordance with § 82.24(c)(3) and (4). A person issued a non-objection notice for the import of an individual shipment of used class II controlled substances may not transfer or confer the right to import, and may not import any more than the exact quantity

(in kilograms) of the used class II controlled substance stated in the non-objection notice. Every kilogram of import of used class II controlled substance in excess of the quantity stated in the non-objection notice issued by the Administrator in accordance with § 82.24(c)(3) and (4) constitutes a separate violation of this subpart.

(3) No person may import for purposes of destruction, at any time in any control period, a class II controlled substance for which EPA has apportioned baseline production and consumption allowances, without having submitted a certification of intent to import for destruction to the Administrator and received a non-objection notice in accordance with § 82.24(c)(6). A person issued a non-objection notice for the import of an individual shipment of class II controlled substances for destruction may not transfer or confer the right to import and may not import any more than the exact quantity (in kilograms) of the class II controlled substance stated in the non-objection notice. For imports intended to be destroyed in the United States, a person issued a non-objection notice must destroy the controlled substance within one year of the date stamped on the non-objection letter, may not transfer or confer the right to import, and may not import any more than the exact quantity (in kilograms) of the class II controlled substance stated in the non-objection notice. Every kilogram of import of class II controlled substance in excess of the quantity stated in the non-objection notice issued by the Administrator in accordance with § 82.24(c)(6) constitutes a separate violation of this subpart.

(c) *Production with Article 5 allowances.* No person may introduce into U.S. interstate commerce any class II controlled substance produced with Article 5 allowances, except for export to an Article 5 Party as listed in Appendix E of this subpart. Every kilogram of a class II controlled substance produced with Article 5 allowances that is introduced into interstate commerce other than for export to an Article 5 Party constitutes a separate violation under this subpart. No person may export any class II controlled substance produced with Article 5 allowances to a non-Ar-

ticle 5 Party. Every kilogram of a class II controlled substance that was produced with Article 5 allowances that is exported to a non-Article 5 Party constitutes a separate violation under this subpart.

(d) *Production with export production allowances.* No person may introduce into U.S. interstate commerce any class II controlled substance produced with export production allowances. Every kilogram of a class II controlled substance that was produced with export production allowances that is introduced into U.S. interstate commerce constitutes a separate violation under this subpart.

(e) *Trade with Parties.* No person may import or export any quantity of a class II controlled substance listed in Appendix A to this subpart, from or to any foreign state that is not either:

(1) A Party to the Beijing Amendment. As of March 14, 2014, the following foreign states had not ratified the Beijing Amendment: Kazakhstan, Libya, and Mauritania. For updates on ratification status, see the Ozone Secretariat's Web site at: http://ozone.unep.org/new_site/en/treaty_ratification_status.php. Or,

(2) A foreign state not party to the Beijing Amendment that is complying with the Beijing Amendment as defined in this subpart.

(f) *Exemptions.* (1) Medical Devices [Reserved]

(g) *Introduction into interstate commerce or use.* (1) Effective January 1, 2010, no person may introduce into interstate commerce or use HCFC-141b (unless used, recovered, and recycled) for any purpose except for use in a process resulting in its transformation or its destruction; for export to Article 5 Parties under § 82.18(a); for HCFC-141b exemption needs; as a transshipment or heel; or for exemptions permitted in paragraph (f) of this section.

(2)(i) Effective January 1, 2010, no person may introduce into interstate commerce or use HCFC-22 or HCFC-142b (unless used, recovered, and recycled) for any purpose other than for use in a process resulting in its transformation or its destruction; for use as a refrigerant in equipment manufactured before January 1, 2010; for export to Article 5 Parties under § 82.18(a); as

Environmental Protection Agency

§ 82.15

a transshipment or heel; or for exemptions permitted in paragraph (f) of this section.

(ii) Introduction into interstate commerce and use of HCFC-22 is not subject to the prohibitions in paragraph (g)(2)(i) of this section if the HCFC-22 is for use in medical equipment prior to January 1, 2015; for use in thermostatic expansion valves prior to January 1, 2015; or for use as a refrigerant in appliances manufactured before January 1, 2012, provided that the components are manufactured prior to January 1, 2010, and are specified in a building permit or a contract dated before January 1, 2010, for use on a particular project.

(3) Effective January 1, 2015, no person may introduce into interstate commerce or use HCFC-141b (unless used, recovered, and recycled) for any purpose other than for use in a process resulting in its transformation or its destruction; for export to Article 5 Parties under § 82.18(a), as a transshipment or heel; or for exemptions permitted in paragraph (f) of this section.

(4)(i) Effective January 1, 2015, no person may introduce into interstate commerce or use any class II controlled substance not governed by paragraphs (g)(1) through (3) of this section (unless used, recovered and recycled) for any purpose other than for use in a process resulting in its transformation or its destruction; for use as a refrigerant in equipment manufactured before January 1, 2020; for use as a fire suppression streaming agent listed as acceptable for use or acceptable subject to narrowed use limits for nonresidential applications in accordance with the regulations at subpart G of this part; for export to Article 5 Parties under § 82.18(a); as a transshipment or heel; for exemptions permitted under paragraph (f) of this section; or for exemptions permitted under paragraph (g)(4)(ii) or (iii) of this section.

(ii) Effective January 1, 2015, use of HCFC-225ca or HCFC-225cb as a solvent (excluding use in manufacturing a product containing HCFC-225ca or HCFC-225cb) is not subject to the use prohibition in paragraph (g)(4)(i) of this section if the person using the HCFC-225ca or HCFC-225cb placed the controlled substance into inventory before January 1, 2015. This paragraph

does not create an exemption to the prohibition on introduction into interstate commerce in paragraph (g)(4)(i) of this section.

(iii) Effective January 1, 2015, use of HCFC-124 as a sterilant for the manufacture and testing of biological indicators is not subject to the use prohibition in paragraph (g)(4)(i) of this section if the person using the HCFC-124 placed the controlled substance into inventory before January 1, 2015. This paragraph does not create an exemption to the prohibition on introduction into interstate commerce in paragraph (g)(4)(i) of this section.

(5)(i) Effective January 1, 2020, no person may introduce into interstate commerce or use HCFC-123 or HCFC-124 (unless used, recovered and recycled) for any purpose other than for use in a process resulting in its transformation or its destruction; for use as a refrigerant in equipment manufactured before January 1, 2020; for use as a fire suppression streaming agent listed as acceptable for use or acceptable subject to narrowed use limits for nonresidential applications in accordance with the regulations at subpart G of this part and only to the extent permitted under paragraph (g)(5)(ii) of this section; for export to Article 5 Parties under § 82.18(a); as a transshipment or heel; or for exemptions permitted under paragraph (f) of this section.

(ii) HCFC-123 that was produced or imported on or after January 1, 2020 may be used as a fire suppression streaming agent only to service equipment manufactured before January 1, 2020. HCFC-123 that was produced or imported prior to January 1, 2020 (or used, recovered and recycled) may be used as a fire suppression streaming agent in equipment manufactured before, on, or after January 1, 2020.

(iii) Notwithstanding the prohibition on use in paragraph (g)(5)(i) of this section, the use of HCFC-123 as a refrigerant in equipment manufactured on or after January 1, 2020 but before January 1, 2021 is permitted if the conditions of this paragraph (g)(5)(iii) are met. The HCFC-123 must be in the possession of an entity that will complete the manufacture of the appliance and imported prior to January 1, 2020. The appliance components must be ready

§ 82.16

40 CFR Ch. I (7–1–24 Edition)

for shipment to a construction location prior to July 24, 2019 and be specified in a building permit or a contract dated before July 24, 2019 for use on a particular project. All HCFC-123 used to service such appliances on or after January 1, 2021 must be used, recovered, or recycled.

(6) Effective January 1, 2030, no person may introduce into interstate commerce or use any class II controlled substance (unless used, recovered, and recycled) for any purpose other than for use in a process resulting in its transformation or its destruction; for export to Article 5 Parties under § 82.18(a); as a transshipment or heel; or for exemptions permitted in paragraph (f) of this section.

(7) Effective January 1, 2040, no person may introduce into interstate commerce or use any class II controlled substance (unless used, recovered, and recycled) for any purpose other than for use in a process resulting in its transformation or its destruction, as a transshipment or heel, or for exemptions permitted in paragraph (f) of this section.

(8) No person may sell or distribute, or offer for sale or distribution, any class II substance that they know, or have reason to know, was imported in violation of this section, except for such actions needed to re-export the controlled substance. Every kilogram of a controlled substance imported in contravention of this paragraph (g)(8) that is sold or distributed, or offered for sale or distribution, constitutes a separate violation of this subpart.

[68 FR 2848, Jan. 21, 2003, as amended at 69 FR 34031, June 17, 2004; 71 FR 41171, July 20, 2006; 74 FR 66445, Dec. 15, 2009; 79 FR 16686, Mar. 26, 2014; 79 FR 64286, Oct. 28, 2014; 85 FR 15296, Mar. 17, 2020; 85 FR 15296, Mar. 17, 2020]

§ 82.16 Phaseout schedule of class II controlled substances.

(a)(1) *Calendar-year allowances.* In each control period as indicated in the following tables, each person is granted the specified percentage of baseline production allowances and baseline consumption allowances for the specified class II controlled substances apportioned under §§ 82.17 and 82.19:

TABLE 1 TO PARAGRAPH (a)—CALENDAR-YEAR HCFC PRODUCTION ALLOWANCES

Control period	Percent of HCFC-141b	Percent of HCFC-22	Percent of HCFC-142b	Percent of HCFC-123	Percent of HCFC-124	Percent of HCFC-225ca	Percent of HCFC-225cb
2003	0	100	100				
2004	0	100	100				
2005	0	100	100				
2006	0	100	100				
2007	0	100	100				
2008	0	100	100				
2009	0	100	100				
2010	0	41.9	0.47	0	125	125	125
2011	0	32	4.9	0	125	125	125
2012	0	17.7	4.9	0	125	125	125
2013	0	30.1	4.9	0	125	125	125
2014	0	26.1	4.9	0	125	125	125
2015	0	21.7	0.37	0	5	0	0
2016	0	21.7	0.32	0	5	0	0
2017	0	21.7	0.26	0	5	0	0
2018	0	21.7	0.21	0	5	0	0
2019	0	21.7	0.16	0	5	0	0
2020	0	0	0	0	5.0	0	0
2021	0	0	0	0	5.0	0	0
2022	0	0	0	0	5.0	0	0
2023	0	0	0	0	4.4	0	0
2024	0	0	0	0	3.8	0	0
2025	0	0	0	0	3.2	0	0
2026	0	0	0	0	2.5	0	0
2027	0	0	0	0	1.9	0	0
2028	0	0	0	0	1.3	0	0
2029	0	0	0	0	0.7	0	0
2030	0	0	0	0	0	0	0

TABLE 2 TO PARAGRAPH (a)—CALENDAR-YEAR HCFC CONSUMPTION ALLOWANCES

Control period	Percent of HCFC-141b	Percent of HCFC-22	Percent of HCFC-142b	Percent of HCFC-123	Percent of HCFC-124	Percent of HCFC-225ca	Percent of HCFC-225cb
2003	0	100	100				
2004	0	100	100				
2005	0	100	100				
2006	0	100	100				
2007	0	100	100				
2008	0	100	100				
2009	0	100	100				
2010	0	41.9	0.47	125	125	125	125
2011	0	32	4.9	125	125	125	125
2012	0	17.7	4.9	125	125	125	125
2013	0	18	4.9	125	125	125	125

TABLE 2 TO PARAGRAPH (a)—CALENDAR-YEAR HCFC CONSUMPTION ALLOWANCES—Continued

Control period	Percent of HCFC-141b	Percent of HCFC-22	Percent of HCFC-142b	Percent of HCFC-123	Percent of HCFC-124	Percent of HCFC-225ca	Percent of HCFC-225cb
2014	0	14.2	4.9	125	125	125	125
2015	0	7	1.7	100	8.3	0	0
2016	0	5.6	1.5	100	8.3	0	0
2017	0	4.2	1.2	100	8.3	0	0
2018	0	2.8	1	100	8.3	0	0
2019	0	1.4	0.7	100	8.3	0	0
2020	0	0	0	32.3	8.3	0	0
2021	0	0	0	32.3	8.3	0	0
2022	0	0	0	32.3	8.3	0	0
2023	0	0	0	28.4	7.3	0	0
2024	0	0	0	24.4	6.3	0	0
2025	0	0	0	20.4	5.3	0	0
2026	0	0	0	16.4	4.2	0	0
2027	0	0	0	12.5	3.2	0	0
2028	0	0	0	8.5	2.2	0	0
2029	0	0	0	4.5	1.1	0	0
2030	0	0	0	0	0	0	0

§ 82.16

40 CFR Ch. I (7-1-24 Edition)

(2) *Recoupment allowances.* In the control period beginning January 1, 2013 and ending December 31, 2013, and again in the control period beginning January 1, 2014 and ending December 31, 2014, certain companies are granted HCFC consumption and production allowances in addition to the percentage of baseline listed in the table at paragraph (a)(1) of this section. The following companies will receive the amounts listed below in both 2013 and 2014: 2,374,846 kg of HCFC-22 consumption allowances and 2,305,924 kg of HCFC-22 production allowances to Arkema; 1,170 kg of HCFC-142b consumption allowances to DuPont; 29,146 kg of HCFC-142b consumption allowances and 53,549 kg of HCFC-142b production allowances to Honeywell; 578,948 kg of HCFC-22 consumption allowances to Solvay Fluorides; and 144,900 kg of HCFC-142b production allowances to Solvay Solexis.

(b) Effective January 1, 2003, no person may produce HCFC-141b except for use in a process resulting in its transformation or its destruction, for export under § 82.18(a) using unexpended Article 5 allowances, for export under § 82.18(b) using unexpended export production allowances, for HCFC-141b exemption needs using unexpended HCFC-141b exemption allowances, or for exemptions permitted in § 82.15(f). Effective January 1, 2003, no person may import HCFC-141b (other than transshipments, heels or used class II controlled substances) in excess of the quantity of unexpended HCFC-141b exemption allowances held by that person except for use in a process resulting in its transformation or its destruction, or for exemptions permitted in § 82.15(f).

(c) Effective January 1, 2010, no person may produce HCFC-22 or HCFC-142b for any purpose other than for use in a process resulting in their transformation or their destruction, for use in equipment manufactured before January 1, 2010, for export under § 82.18(a) using unexpended Article 5 allowances, or for export under § 82.18(b) using unexpended export production allowances, or for exemptions permitted in § 82.15(f). Effective January 1, 2010, no person may import HCFC-22 or HCFC-142b (other than transshipments, heels

or used class II controlled substances) for any purpose other than for use in a process resulting in their transformation or their destruction, for exemptions permitted in § 82.15(f), or for use in equipment manufactured prior to January 1, 2010.

(d) Effective January 1, 2015, no person may produce class II controlled substances not previously controlled for any purpose other than for use in a process resulting in their transformation or their destruction, for use as a refrigerant in equipment manufactured before January 1, 2020, for use as a fire suppression streaming agent listed as acceptable for use or acceptable subject to narrowed use limits for non-residential applications in accordance with the regulations at subpart G of this part, for export under § 82.18(a) using unexpended Article 5 allowances, for export under § 82.18(b) using unexpended export production allowances, or for exemptions permitted in § 82.15(f). Effective January 1, 2015, no person may import class II controlled substances not subject to the requirements of paragraph (b) or (c) of this section (other than transshipments, heels, or used class II controlled substances) for any purpose other than for use in a process resulting in their transformation or their destruction, for exemptions permitted in § 82.15(f), for use as a refrigerant in equipment manufactured prior to January 1, 2020, or for use as a fire suppression streaming agent listed as acceptable for use or acceptable subject to narrowed use limits for nonresidential applications in accordance with the regulations at subpart G of this part.

(e)(1) Effective January 1, 2020, no person may produce HCFC-22 or HCFC-142b for any purpose other than for use in a process resulting in their transformation or their destruction, for export under § 82.18(a) using unexpended Article 5 allowances, or for exemptions permitted in § 82.15(f). Effective January 1, 2020, no person may import HCFC-22 or HCFC-142b for any purpose other than for use in a process resulting in their transformation or their destruction or for exemptions permitted in § 82.15(f).

§ 82.17

40 CFR Ch. I (7–1–24 Edition)

(2) Effective January 1, 2020, no person may produce HCFC-123 for any purpose other than for use in a process resulting in its transformation or its destruction, for use as a refrigerant in equipment manufactured before January 1, 2020, for export under § 82.18(a) using unexpended Article 5 allowances, or for exemptions permitted in § 82.15(f). Effective January 1, 2020, no person may import HCFC-123 for any purpose other than for use in a process resulting in its transformation or its destruction, for use as a refrigerant in equipment manufactured before January 1, 2020, for use as a fire suppression streaming agent in equipment manufactured before January 1, 2020 and listed as acceptable for use or acceptable subject to narrowed use limits for non-residential applications, or for exemptions permitted in § 82.15(f).

(f) Effective January 1, 2030, no person may produce class II controlled substances, for any purpose other than for use in a process resulting in their transformation or their destruction, for export under § 82.18(a) using unexpended Article 5 allowances, or for ex-

emptions permitted in § 82.15(f). Effective January 1, 2030, no person may import class II controlled substances for any purpose other than for use in a process resulting in their transformation or their destruction, or for exemptions permitted in § 82.15(f).

(g) Effective January 1, 2040, no person may produce class II controlled substances for any purpose other than for use in a process resulting in their transformation or their destruction, or for exemptions permitted in § 82.15(f).

(h) [Reserved]

[68 FR 2848, Jan. 21, 2003, as amended at 71 FR 41171, July 20, 2006; 74 FR 66446, Dec. 15, 2009; 76 FR 47467, Aug. 5, 2011; 78 FR 20027, Apr. 3, 2013; 79 FR 64286, Oct. 28, 2014; 85 FR 15296, Mar. 17, 2020]

§ 82.17 Apportionment of baseline production allowances for class II controlled substances.

The following persons are apportioned baseline production allowances for HCFC-22, HCFC-141b, HCFC-142b, HCFC-123, HCFC-124, HCFC-225ca, and HCFC-225cb as set forth in the following table:

Person	Controlled substance	Allowances (kg)
AGC Chemicals Americas	HCFC-225ca	266,608
	HCFC-225cb	373,952
Arkema	HCFC-22	46,692,336
	HCFC-141b	24,647,925
	HCFC-142b	484,369
	HCFC-22	42,638,049
DuPont	HCFC-124	2,269,210
	HCFC-22	37,378,252
Honeywell	HCFC-141b	28,705,200
	HCFC-142b	2,417,534
	HCFC-124	1,759,681
	HCFC-22	2,383,835
MDA Manufacturing	HCFC-142b	6,541,764
Solvay Specialty Polymers USA, LLC		

[79 FR 64287, Oct. 28, 2014]

§ 82.18 Availability of production in addition to baseline production allowances for class II controlled substances.

(a) *Article 5 allowances.* (1) Effective January 1, 2003, a person apportioned baseline production allowances for HCFC-141b, HCFC-22, or HCFC-142b under § 82.17 is also apportioned Article 5 allowances, equal to 15 percent of their baseline production allowances, for the specified HCFC for each control

period up until December 31, 2009, to be used for the production of the specified HCFC for export only to foreign states listed in Appendix E to this subpart.

(2) Effective January 1, 2010, a person apportioned baseline production allowances under § 82.17 for HCFC-141b, HCFC-22, or HCFC-142b is also apportioned Article 5 allowances, equal to 10 percent of their baseline production allowances, for the specified HCFC for each control period up until December

31, 2019, to be used for the production of the specified HCFC for export only to foreign states listed in Appendix E to this subpart.

(3) Effective January 1, 2015, a person apportioned baseline production allowances under § 82.17 for HCFC-123, HCFC-124, HCFC-225ca, and HCFC-225cb is also apportioned Article 5 allowances, equal to 10 percent of their baseline production allowances, for the specified HCFC for each control period up until December 31, 2019, to be used for the production of the specified HCFC for export only to foreign states listed in Appendix E to this subpart.

(b) *Export Production Allowances.* (1) Effective January 1, 2003, a person apportioned baseline production allowances for HCFC-141b under § 82.17 is also apportioned export production allowances, equal to 100 percent of their baseline production allowances, for HCFC-141b for each control period up until December 31, 2009, to be used for the production of HCFC-141b for export only, in accordance with this section.

(2) [Reserved]

(c) *International trades of production allowances, export production allowances and Article 5 allowances.* (1) A person may increase or decrease their production allowances, export production allowances, or Article 5 allowances, for a specified control period through trades with a foreign state that is Party to the Beijing Amendment or is complying with the Beijing Amendment as defined in this subpart. The foreign state must agree either to trade to the person for the current control period some quantity of production that the foreign state is permitted under the Montreal Protocol or to receive from the person for the current control period some quantity of production that the person is permitted under this subpart. The person must expend their consumption allowances allocated under § 82.19, or obtained under § 82.20 in order to produce with the additional production allowances.

(2) *Trade from a Party—Information requirements.* (i) A person requesting a trade from a Party must submit to the Administrator a signed document from the principal diplomatic representative in that nation's embassy in the U.S. stating that the appropriate authority

within that nation will establish or revise production limits for the nation to equal the lowest of the following three production quantities:

(A) The maximum production that the nation is allowed under the Protocol minus the quantity (in kilograms) to be traded;

(B) The maximum production that is allowed under the nation's applicable domestic law minus the quantity (in kilograms) to be traded; or

(C) The average of the nation's actual national production level for the three years prior to the trade minus the production to be traded.

(ii) A person requesting a trade from a Party must also submit to the Administrator a true copy of the document that sets forth the following:

(A) The identity and address of the person;

(B) The identity of the Party;

(C) The names and telephone numbers of contact persons for the person and for the Party;

(D) The chemical type and quantity (in kilograms) of production being traded;

(E) Documentation that the Party possesses the necessary quantity of unexpended production rights;

(F) The control period(s) to which the trade applies; and

(G) For increased production intended for export to the Party from whom the allowances would be received, a signed statement of intent to export to the Party.

(3) *Trade to a Party—Information requirements.* A person requesting a trade to a Party must submit a request that sets forth the following information to the Administrator:

(i) The identity and address of the person;

(ii) The identity of the Party;

(iii) The names and telephone numbers of contact persons for the person and for the Party;

(iv) The chemical type and quantity (in kilograms) of allowable production being traded; and

(v) The control period(s) to which the trade applies.

(4) *Review of international trade request to a Party.* After receiving a trade request that meets the requirements of

paragraph (c)(3) of this section, the Administrator may, at his/her discretion, consider the following factors by seeking concurrence from the Department of Commerce, the United States Trade Representative, and the Department of State, where appropriate, in deciding whether to approve such a trade:

- (i) Possible creation of domestic economic hardship;
- (ii) Possible effects on trade;
- (iii) Potential environmental implications; and
- (iv) The total quantity of unexpended production allowances held by U.S. entities.

(5) *Notice of trade.* If the request meets the requirement of paragraph (c)(2) of this section for trades from Parties and paragraphs (c)(3) and (4) of this section for trades to Parties, the Administrator will issue the person a notice. The notice will either grant or deduct production allowances or export production allowances or Article 5 allowances and specify the control period to which the trade applies. The Administrator may disapprove the trade request contingent on the consideration of factors listed in paragraph (c)(4) of this section for trades to Parties.

(i) For trades from a Party, the Administrator will issue a notice revising the allowances held by the recipient of the trade to equal the unexpended production allowances, unexpended export production allowances, or unexpended Article 5 allowances held by the recipient of the trade under this subpart plus the quantity of allowable production traded from the Party.

(ii) For trades to a Party, the Administrator will issue a notice revising the production limit for the trader to equal the lesser of:

(A) The unexpended production allowances, unexpended export production allowances or unexpended Article 5 allowances held by the trade or minus the quantity traded; or

(B) The unexpended production allowances held by the trader minus the amount by which the U.S. average annual production of the class II controlled substance being traded for the three years prior to the trade is less than the total allowable production of that class II controlled substance

under this subpart minus the amount traded; or

(C) The total U.S. allowable production of the class II controlled substance being traded minus the three-year average of the actual annual U.S. production of the class II controlled substance prior to the control period of the trade.

(6) Revised notices of production limits for subsequent traders. If after one person obtains approval of a trade of allowable production of a class II controlled substance to a Party and other persons obtain approval for trades of the same class II controlled substance during the same control period, the Administrator will issue revised notices. The notices will revise the production limits for each of the other persons trading to equal the lesser of:

(i) The unexpended production allowances, unexpended export production allowances or unexpended Article 5 allowances held by the trader under this subpart minus the quantity traded; or

(ii) The result of the following set of calculations:

(A) The total U.S. allowable production of the class II controlled substance minus the three-year average of the actual annual U.S. production of the class II controlled substance prior to the control period of the trade;

(B) The quantity traded divided by the total quantity traded by all the other persons trading the same class II controlled substance in the same control period;

(C) The result of paragraph (c)(6)(ii)(A) of this section multiplied by the result of paragraph (c)(6)(ii)(B) of this section;

(D) The quantity derived in paragraph (c)(6)(i) of this section, minus the result of paragraph (c)(6)(ii)(C) of this section;

(7) Production limit for previous traders. The Administrator will also issue a notice revising the production limit for each trader who previously obtained approval of a trade of the class II controlled substance to a Party in the same control period to equal the result of the following set of calculations:

(i) The total U.S. allowable production of the class II controlled substance minus the three-year average of the actual annual U.S. production of the

Environmental Protection Agency

§ 82.19

class II controlled substance prior to the control period of the trade;

(ii) The quantity traded by the person divided by the quantity traded by all the persons who have traded that class II controlled substance in that control period;

(iii) The result of paragraph (c)(7)(i) of this section multiplied by the result of paragraph (c)(7)(ii) of this section.

(iv) The unexpended production allowances, unexpended export production allowances or unexpended Article 5 allowances held by the person plus the result of paragraph (c)(7)(iii) of this section;

(8) Effective date of revised production limits. The change in production

allowances, export production allowances or Article 5 allowances will be effective on the date that the notice is issued.

[68 FR 2848, Jan. 21, 2003, as amended at 74 FR 66446, Dec. 15, 2009; 79 FR 16687, Mar. 26, 2014]

§ 82.19 Apportionment of baseline consumption allowances for class II controlled substances.

The following persons are apportioned baseline consumption allowances for HCFC-22, HCFC-142b, HCFC-123, HCFC-124, HCFC-225ca, and HCFC-225cb as set forth in the following table:

Person	Controlled substance	Allowances (kg)
ABCO Refrigeration Supply	HCFC-22	279,366
AGC Chemicals Americas	HCFC-225ca	285,328
	HCFC-225cb	286,832
Altair Partners	HCFC-22	302,011
Arkema	HCFC-22	48,637,642
	HCFC-141b	25,405,570
	HCFC-142b	483,827
	HCFC-124	3,719
Carrier	HCFC-22	54,088
Continental Industrial Group	HCFC-141b	20,315
Coolgas, Inc.	HCFC-141b	16,097,869
Combs Investment Property	HCFC-22	1,040,458
	HCFC-123	19,980
	HCFC-124	3,742
Discount Refrigerants	HCFC-141b	994
DuPont	HCFC-22	38,814,862
	HCFC-141b	9,049
	HCFC-142b	52,797
	HCFC-123	1,877,042
	HCFC-124	743,312
H.G. Refrigeration Supply	HCFC-22	40,068
Honeywell	HCFC-22	35,392,492
	HCFC-141b	20,749,489
	HCFC-142b	1,315,819
	HCFC-124	1,284,265
ICC Chemical Corp.	HCFC-141b	81,225
ICOR	HCFC-124	81,220
Mexichem Fluor Inc.	HCFC-22	2,546,305
Kivlan & Company	HCFC-22	2,081,018
MDA Manufacturing	HCFC-22	2,541,545
Mondy Global	HCFC-22	281,824
National Refrigerants	HCFC-22	5,528,316
	HCFC-123	72,600
	HCFC-124	50,380
Perfect Technology Center, LP	HCFC-123	9,100
Refricenter of Miami	HCFC-22	381,293
Refricentro	HCFC-22	45,979
R-Lines	HCFC-22	63,172
Saez Distributors	HCFC-22	37,936
Solvay Fluorides, LLC	HCFC-22	3,781,691
	HCFC-141b	3,940,115
Solvay Specialty Polymers USA, LLC	HCFC-142b	194,536
Tulstar Products	HCFC-141b	89,913
	HCFC-123	34,800
	HCFC-124	229,582
USA Refrigerants	HCFC-22	14,865

[79 FR 64288, Oct. 28, 2014]

§ 82.20 Availability of consumption allowances in addition to baseline consumption allowances for class II controlled substances.

(a) A person may obtain at any time during the control period, in accordance with the provisions of this section, consumption allowances equivalent to the quantity of class II controlled substances that the person exported from the United States and its territories to a foreign state in accordance with this section, when that quantity of class II controlled substance was produced in the U.S. or imported into the United States with expended consumption allowances. Both the export of the class II controlled substance and the request for additional consumption allowances must occur during a calendar year in which consumption allowances were issued for that class II controlled substance.

(1) The exporter must submit to the Administrator a request for consumption allowances setting forth the following:

- (i) The identities and addresses of the exporter and the recipient of the exports;
- (ii) The exporter's Employer Identification Number;
- (iii) The names and telephone numbers of contact persons for the exporter and the recipient;
- (iv) The quantity (in kilograms) and type of class II controlled substances reported;
- (v) The source of the class II controlled substances and the date purchased;
- (vi) The date on which, and the port from which, the class II controlled substances were exported from the U.S. or its territories;
- (vii) The country to which the class II controlled substances were exported;
- (viii) A copy of the bill of lading and the invoice indicating the net quantity (in kilograms) of class II controlled substances shipped and documenting the sale of the class II controlled substances to the purchaser;
- (ix) The commodity codes of the class II controlled substances reported; and
- (x) A written statement from the producer that the class II controlled substances were produced with expended allowances or a written statement

from the importer that the class II controlled substances were imported with expended allowances.

(2) The Administrator will review the information and documentation submitted under paragraph (a)(1) of this section and will issue a notice.

(i) The Administrator will determine the quantity of class II controlled substances that the documentation verifies was exported and issue consumption allowances equivalent to the quantity of class II controlled substances that were exported.

(A) The grant of the consumption allowances will be effective on the date the notice is issued.

(B) The consumption allowances will be granted to the person the exporter indicates, whether it is the producer, the importer, or the exporter.

(ii) The Administrator will issue a notice that the consumption allowances are not granted if the Administrator determines that the information and documentation do not satisfactorily substantiate the exporter's claims.

(b) *International trades of consumption allowances.* (1) A person may increase its consumption allowances for a specified control period through trades with another Party to the Protocol as set forth in this paragraph (b). A person may only receive consumption from Poland or Norway, or both, and only if the nation agrees to trade to the person for the current control period some quantity of consumption that the nation is permitted under the Montreal Protocol.

(2) Trade from a Party—Information requirements. A person must submit the following information to the Administrator:

(i) A signed document from the principal diplomatic representative in the Polish or Norwegian embassy in the U.S. stating that the appropriate authority within that nation will establish or revise consumption limits for the nation to equal the lowest of the following three consumption quantities:

(A) The maximum consumption that the nation is allowed under the Protocol minus the quantity (in kilograms) traded;

(B) The maximum consumption that is allowed under the nation's applicable domestic law minus the quantity (in kilograms) traded; or

(C) The average of the nation's actual consumption level for the three years prior to the trade minus the consumption traded.

(ii) A person requesting a consumption trade from Poland or Norway must also submit to the Administrator a true copy of the document that sets forth the following:

(A) The identity and address of the person;

(B) The identity of the Party;

(C) The names and telephone numbers of contact persons for the person and for the Party;

(D) The chemical type and quantity (in kilograms) of consumption being traded;

(E) Documentation that the Party possesses the necessary quantity of unexpended consumption rights;

(F) The control period(s) to which the trade applies; and

(3) *Notice of trade.* If the request meets the requirement of paragraph (b)(2) of this section for trades from Parties, the Administrator will issue the person a notice. The notice will grant consumption allowances and specify the control period to which the trade applies. The Administrator may disapprove the trade request if it does not meet the requirements of paragraph (b)(2) of this section.

(4) *Trade from a Party.* The Administrator will issue a notice revising the allowances held by the recipient of the trade to equal the unexpended consumption allowances held by the recipient of the trade under this subpart plus the quantity of allowable consumption traded from the Party.

(5) *Effective date of revised consumption limits.* The change in consumption allowances will be effective on the date that the notice is issued.

[68 FR 2848, Jan. 21, 2003, as amended at 71 FR 41172, July 20, 2006; 79 FR 64288, Oct. 28, 2014]

§§ 82.21–82.22 [Reserved]

§ 82.23 Transfers of allowances of class II controlled substances.

(a) *Inter-company transfers.* Effective January 1, 2003, a person ("transferor") may transfer to any other person ("transferee") any quantity of the transferor's class II consumption allowances, production allowances, export production allowances, or Article 5 allowances for the same type of allowance as follows:

(i) The transferor must submit to the Administrator a transfer claim setting forth the following:

(A) The identities and addresses of the transferor and the transferee;

(B) The name and telephone numbers of contact persons for the transferor and the transferee;

(C) The type of allowances being transferred, including the names of the class II controlled substances for which allowances are to be transferred;

(D) The quantity (in kilograms) of allowances being transferred;

(E) The control period(s) for which the allowances are being transferred;

(F) [Reserved]

(G) For trades of consumption allowances, production allowances, export production allowances, or Article 5 allowances, the quantity of the 0.1 percent offset applied to the unweighted quantity traded that will be deducted from the transferor's allowance balance.

(ii) The Administrator will determine whether the records maintained by EPA indicate that the transferor possesses unexpended allowances sufficient to cover the transfer claim on the date the transfer claim is processed. The transfer claim is the quantity (in kilograms) to be transferred plus 0.1 percent of that quantity. The Administrator will take into account any previous transfers, any production, and allowable imports and exports of class II controlled substances reported by the transferor. Within three working days of receiving a complete transfer claim, the Administrator will take action to notify the transferor and transferee as follows:

(A) The Administrator will issue a notice indicating that EPA does not object to the transfer if EPA's records

show that the transferor has sufficient unexpended allowances to cover the transfer claim. In the case of transfers of production or consumption allowances, EPA will reduce the transferor's balance of unexpended allowances by the quantity to be transferred plus 0.1 percent of that quantity. In the case of transfers of export production or Article 5 allowances, EPA will reduce the transferor's balance of unexpended allowances, respectively, by the quantity to be transferred plus 0.1 percent of that quantity. The transferor and the transferee may proceed with the transfer when EPA issues a no objection notice. However, if EPA ultimately finds that the transferor did not have sufficient unexpended allowances to cover the claim, the transferor and transferee, where applicable, will be held liable for any knowing violations of the regulations of this subpart that occur as a result of, or in conjunction with, the improper transfer.

(B) The Administrator will issue a notice disallowing the transfer if EPA's records show that the transferor has insufficient unexpended allowances to cover the transfer claim, or that the transferor has failed to respond to one or more Agency requests to supply information needed to make a determination. Either party may file a notice of appeal, with supporting reasons, with the Administrator within 10 working days after receipt of notification. The Administrator may affirm or vacate the disallowance. If no appeal is taken by the tenth working day after notification, the disallowance shall be final on that day.

(iii) The transferor and transferee may proceed with the transfer if the Administrator does not respond to a transfer claim within the three working days specified in paragraph (a)(1)(ii) of this section. In the case of transfers of production or consumption allowances, EPA will reduce the transferor's balance of unexpended allowances by the quantity to be transferred plus 0.1 percent of that quantity. In the case of transfers of export production allowances or Article 5 allowances, EPA will reduce the transferor's balance of unexpended allowances by the quantity to be transferred plus 0.1 percent of that quantity. If EPA ultimately

finds that the transferor did not have sufficient unexpended allowances to cover the claim, the transferor and/or the transferee, where applicable, will be held liable for any knowing violations of the regulations of this subpart that occur as a result of, or in conjunction with, the improper transfer.

(b) *Inter-pollutant transfers.* (1) Effective January 1, 2003, a person (transferor) may convert consumption allowances, production allowances or Article 5 allowances for one class II controlled substance to the same type of allowance for another class II controlled substance listed in appendix B of this subpart, following the procedures described in paragraph (b)(3) of this section.

(i) A person (transferor) may only convert allowances for one class II controlled substance for which EPA has issued allowances under § 82.16 to another class II controlled substance for which EPA has issued allowances under § 82.16.

(ii) [Reserved]

(2) Inter-pollutant transfers will be permitted at any time during the control period and during the 30 days after the end of a control period.

(3) The transferor must submit to the Administrator a transfer claim that includes the following:

(i) The identity and address of the transferor;

(ii) The name and telephone number of a contact person for the transferor;

(iii) The type of allowances being converted, including the names of the class II controlled substances for which allowances are to be converted;

(iv) The quantity (in kilograms) and type of allowances to be converted;

(v) The quantity (in kilograms) of allowances to be subtracted from the transferor's unexpended allowances for the first class II controlled substance, to be equal to 100.1 percent of the quantity of allowances converted;

(vi) The quantity (in kilograms) of allowances to be added to the transferee's unexpended allowances for the second class II controlled substance, to be equal to the quantity (in kilograms)

of allowances for the first class II controlled substance being converted multiplied by the quotient of the ozone depletion potential of the first class II controlled substance divided by the ozone depletion potential of the second class II controlled substance, as listed in Appendix B to this subpart;

(vii) The control period(s) for which the allowances are being converted; and

(viii) The quantity (in kilograms) of unexpended allowances of the type and for the control period being converted that the transferor holds under authority of this subpart as of the date the claim is submitted to EPA.

(4) The Administrator will determine whether the records maintained by EPA indicate that the convertor possesses unexpended allowances sufficient to cover the transfer claim on the date the transfer claim is processed (*i.e.*, the quantity (in kilograms) to be converted plus 0.1 percent of that quantity (in kilograms)). EPA will take into account any previous transfers, and any production, imports (not including transshipments or used class II controlled substances), or exports (not including transshipments or used class II controlled substances) of class II controlled substances reported by the convertor. Within three working days of receiving a complete transfer claim, the Administrator will take action to notify the convertor as follows:

(i) The Administrator will issue a notice indicating that EPA does not object to the transfer if EPA's records show that the convertor has sufficient unexpended allowances to cover the transfer claim. EPA will reduce the transferor's balance of unexpended allowances by the quantity to be converted plus 0.1 percent of that quantity (in kilograms). When EPA issues a no objection notice, the transferor may proceed with the transfer. However, if EPA ultimately finds that the transferor did not have sufficient unexpended allowances to cover the claim, the transferor will be held liable for any violations of the regulations of this subpart that occur as a result of, or in conjunction with, the improper transfer.

(ii) The Administrator will issue a notice disallowing the transfer if EPA's

records show that the transferor has insufficient unexpended allowances to cover the transfer claim, or that the transferor has failed to respond to one or more Agency requests to supply information needed to make a determination. The transferor may file a notice of appeal, with supporting reasons, with the Administrator within 10 working days after receipt of notification. The Administrator may affirm or vacate the disallowance. If no appeal is taken by the tenth working day after notification, the disallowance shall be final on that day.

(iii) The transferor may proceed with the transfer if the Administrator does not respond to a transfer claim within the three working days specified in paragraph (b)(4) of this section. EPA will reduce the transferor's balance of unexpended allowances by the quantity (in kilograms) to be converted plus 0.1 percent of that quantity (in kilograms). The transferor will be held liable for any violations of the regulations of this subpart that occur as a result of, or in conjunction with, the improper transfer if EPA ultimately finds that the transferor did not have sufficient unexpended allowances or credits to cover the claim.

(c) *Inter-company transfers and Inter-pollutant transfers.* If a person requests an inter-company transfer and an inter-pollutant transfer simultaneously, the quantity (in kilograms) subtracted from the transferor's unexpended production or consumption allowances for the first class II controlled substance will be equal to 100.1 percent of the quantity (in kilograms) of allowances that are being converted and transferred.

(d) *Permanent transfers.* The procedures in paragraph (a) of this section apply to permanent inter-company transfers of baseline production allowances or baseline consumption allowances. A person receiving a permanent transfer of baseline production allowances or baseline consumption allowances (the transferee) for a specific class II controlled substance will be the person who has their baseline allowances adjusted in accordance with phaseout schedules in this subpart. No person may conduct permanent inter-

§ 82.24

40 CFR Ch. I (7–1–24 Edition)

pollutant transfers of baseline production allowances or baseline consumption allowances.

[68 FR 2848, Jan. 21, 2003, as amended at 78 FR 20028, Apr. 3, 2013; 85 FR 15298, Mar. 17, 2020]

§ 82.24 Recordkeeping and reporting requirements for class II controlled substances.

(a) *Recordkeeping and reporting.* Any person who produces, imports, exports, transforms, or destroys class II controlled substances must comply with the following recordkeeping and reporting requirements:

(1) Reports required by this section must be submitted to the Administrator within 45 days of the end of the applicable reporting period, unless otherwise specified. Starting May 18, 2020, reports that are available for submission through the Central Data Exchange must be submitted electronically through that tool.

(2) Revisions of reports that are required by this section must be mailed to the Administrator within 180 days of the end of the applicable reporting period, unless otherwise specified.

(3) Records and copies of reports required by this section must be retained for three years.

(4) Quantities of class II controlled substances must be stated in terms of kilograms in reports required by this section.

(5) Reports and records required by this section may be used for purposes of compliance determinations. These requirements are not intended as a limitation on the use of other evidence admissible under the Federal Rules of Evidence. Failure to provide the reports, petitions and records required by this section and to certify the accuracy of the information in the reports, petitions and records required by this section, will be considered a violation of this subpart. False statements made in reports, petitions and records will be considered violations of Section 113 of the Clean Air Act and under 18 U.S.C. 1001.

(b) *Producers.* Persons (“producers”) who produce class II controlled substances during a control period must comply with the following recordkeeping and reporting requirements:

(1) *Reporting—Producers.* For each quarter, each producer of a class II controlled substance must provide the Administrator with a report containing the following information:

(i) The quantity (in kilograms) of production of each class II controlled substance used in processes resulting in their transformation by the producer and the quantity (in kilograms) intended for transformation by a second party;

(ii) The quantity (in kilograms) of production of each class II controlled substance used in processes resulting in their destruction by the producer and the quantity (in kilograms) intended for destruction by a second party;

(iii) The expended allowances for each class II controlled substance;

(iv) [Reserved]

(v) The quantity (in kilograms) of class II controlled substances sold or transferred during the quarter to a person other than the producer for use in processes resulting in their transformation or eventual destruction;

(vi) A list of the quantities and names of class II controlled substances, exported by the producer to a Party to the Protocol, that will be transformed or destroyed and therefore were not produced expending production or consumption allowances;

(vii) For transformation in the U.S. or by a person of another Party, one copy of a transformation verification from the transformer for a specific class II controlled substance and a list of additional quantities shipped to that same transformer for the quarter;

(viii) For destruction in the U.S. or by a person of another Party, one copy of a destruction verification as required in paragraph (e) of this section for a particular destroyer, destroying the same class II controlled substance, and a list of additional quantities shipped to that same destroyer for the quarter; and

(ix) [Reserved]

(x) In cases where the producer produced class II controlled substances using Article 5 allowances, a list of U.S. entities that purchased those class II controlled substances and exported them to Article 5 countries.

(2) *Recordkeeping—Producers.* Every producer of a class II controlled substance during a control period must maintain the following records:

(i) Dated records of the quantity (in kilograms) of each class II controlled substance produced at each facility;

(ii) Dated records of the quantity (in kilograms) of class II controlled substances produced for use in processes that result in their transformation or for use in processes that result in their destruction;

(iii) Dated records of the quantity (in kilograms) of class II controlled substances sold for use in processes that result in their transformation or for use in processes that result in their destruction;

(iv) Dated records of the quantity (in kilograms) of class II controlled substances produced with Article 5 allowances;

(v) Copies of invoices or receipts documenting sale of class II controlled substances for use in processes that result in their transformation or for use in processes that result in their destruction;

(vi) Dated records of the quantity (in kilograms) of each class II controlled substance used at each facility as feedstocks or destroyed in the manufacture of a class II controlled substance or in the manufacture of any other substance, and any class II controlled substance introduced into the production process of the same class II controlled substance at each facility;

(vii) Dated records of the quantity (in kilograms) of raw materials and feedstock chemicals used at each facility for the production of class II controlled substances;

(viii) Dated records of the shipments of each class II controlled substance produced at each plant;

(ix) The quantity (in kilograms) of class II controlled substances, the date received, and names and addresses of the source of used materials containing class II controlled substances which are recycled or reclaimed at each plant;

(x) Records of the date, the class II controlled substance, and the estimated quantity of any spill or release of a class II controlled substance that equals or exceeds 100 pounds;

(xi) Transformation verification in the case of transformation, or the destruction verification in the case of destruction as required in paragraph (e) of this section showing that the purchaser or recipient of a class II controlled substance, in the U.S. or in another country that is a Party, certifies the intent to either transform or destroy the class II controlled substance, or sell the class II controlled substance for transformation or destruction in cases when allowances were not expended; and

(xii) [Reserved]

(xiii) Written verifications from a U.S. purchaser that the class II controlled substance was exported to an Article 5 country in cases where Article 5 allowances were expended to produce the class II controlled substance.

(3) For any person who fails to maintain the records required by this paragraph, or to submit the report required by this paragraph, the Administrator may assume that the person has produced at full capacity during the period for which records were not kept, for purposes of determining whether the person has violated the prohibitions at § 82.15.

(c) *Importers.* Persons (“importers”) who import class II controlled substances during a control period must comply with the following recordkeeping and reporting requirements:

(1) *Reporting—Importers.* For each quarter, an importer of a class II controlled substance (including importers of used class II controlled substances) must submit to the Administrator a report containing the following information:

(i) Summaries of the records required in paragraphs (c)(2)(i) through (xvi) of this section for the previous quarter;

(ii) The total quantity (in kilograms) imported of each class II controlled substance for that quarter;

(iii) The commodity code for the class II controlled substances imported, which must be one of those listed in Appendix K to this subpart;

(iv) The quantity (in kilograms) of those class II controlled substances imported that are used class II controlled substances;

(v) The quantity (in kilograms) of class II controlled substances imported for that quarter and totaled by chemical for the control period to date;

(vi) [Reserved]

(vii) The quantity (in kilograms) of class II controlled substances imported for use in processes resulting in their transformation or destruction;

(viii) The quantity (in kilograms) of class II controlled substances sold or transferred during that quarter to each person for use in processes resulting in their transformation or eventual destruction; and

(ix) Transformation verifications showing that the purchaser or recipient of imported class II controlled substances intends to transform those substances or destruction verifications showing that the purchaser or recipient intends to destroy the class II controlled substances (as provided in paragraph (e) of this section).

(2) *Recordkeeping—Importers.* An importer of a class II controlled substance (including used class II controlled substances) must maintain the following records:

(i) The quantity (in kilograms) of each class II controlled substance imported, either alone or in mixtures, including the percentage of each mixture which consists of a class II controlled substance;

(ii) The quantity (in kilograms) of those class II controlled substances imported that are used and the information provided with the petition where a petition is required under paragraph (c)(3) of this section;

(iii) The quantity (in kilograms) of class II controlled substances other than transshipments or used substances imported for use in processes resulting in their transformation or destruction;

(iv) The quantity (in kilograms) of class II controlled substances other than transshipments or used substances imported and sold for use in processes that result in their destruction or transformation;

(v) The date on which the class II controlled substances were imported;

(vi) The port of entry through which the class II controlled substances passed;

(vii) The country from which the imported class II controlled substances were imported;

(viii) The commodity code for the class II controlled substances shipped, which must be one of those listed in Appendix K to this subpart;

(ix) The importer number for the shipment;

(x) A copy of the bill of lading for the import;

(xi) The invoice for the import;

(xii) The quantity (in kilograms) of imports of used class II controlled substances;

(xiii) The U.S. Customs entry number;

(xiv) Dated records documenting the sale or transfer of class II controlled substances for use in processes resulting in their transformation or destruction; and

(xv) Copies of transformation verifications or destruction verifications indicating that the class II controlled substances will be transformed or destroyed (as provided in paragraph (e) of this section).

(3) *Petition to import used class II controlled substances and transshipment-Importers.* For each individual shipment over 5 pounds of a used class II controlled substance as defined in § 82.3 for which EPA has apportioned baseline production and consumption allowances, an importer must submit directly to the Administrator, at least 40 working days before the shipment is to leave the foreign port of export, the following information in a petition:

(i) The name, commodity code and quantity (in kilograms) of the used class II controlled substance to be imported;

(ii) The name and address of the importer, the importer ID number, the contact person, email address, and phone number;

(iii) Name, address, contact person, email address, and phone number of all previous source facilities from which the used class II controlled substance was recovered;

(iv) A detailed description of the previous use of the class II controlled substance at each source facility and a best estimate of when the specific controlled substance was put into the equipment at each source facility, and,

when possible, documents indicating the date the material was put into the equipment;

(v) A list of the name, make and model number of the equipment from which the material was recovered at each source facility;

(vi) Name, address, contact person, email address, and phone number of the exporter and of all persons to whom the material was transferred or sold after it was recovered from the source facility;

(vii) The U.S. port of entry for the import, the expected date of shipment and the vessel transporting the chemical. If at the time of submitting a petition the importer does not know the U.S. port of entry, the expected date of shipment and the vessel transporting the chemical, and the importer receives a non-objection notice for the individual shipment in the petition, the importer is required to notify the Administrator of this information prior to the actual U.S. Customs entry of the individual shipment;

(viii) A description of the intended use of the used class II controlled substance, and, when possible, the name, address, contact person, email address, and phone number of the ultimate purchaser in the United States;

(ix) The name, address, contact person, email address, and phone number of the U.S. reclamation facility, where applicable;

(x) If someone at the source facility recovered the class II controlled substance from the equipment, the name, email address, and phone number of that person;

(xi) If the imported class II controlled substance was reclaimed in a foreign Party, the name, address, contact person, email address, and phone number of any or all foreign reclamation facility(ies) responsible for reclaiming the cited shipment;

(xii) The export license, application for an export license, or official communication acknowledging the export from the appropriate government agency in the country of export and, if recovered in another country, the export license or official communication from the appropriate government agency in that country, and quantity authorized for export in kilograms on the export

license, and an English translation of these documents;

(xiii) If the imported used class II controlled substance is intended to be sold as a refrigerant in the United States, the name, address, and email address of the EPA-certified U.S. reclaimer who will bring the material to the standard required under subpart F of this part, if not already reclaimed to those specifications; and

(xiv) A certification of accuracy of the information submitted in the petition.

(4) *Review of petition to import used class II controlled substances and transshipments—Importers.* Starting on the first working day following receipt by the Administrator of a petition to import a used class II controlled substance, the Administrator will initiate a review of the information submitted under paragraph (c)(3) of this section and take action within 40 working days to issue either an objection-notice or a non-objection notice for the individual shipment to the person who submitted the petition to import the used class II controlled substance.

(i) The Administrator may issue an objection notice to a petition for the following reasons:

(A) If the Administrator determines that the information is insufficient, that is, if the petition lacks or appears to lack any of the information required under paragraph (c)(3) of this section or other information that may be requested during the review of the petition necessary to verify that the controlled substance is used;

(B) If the Administrator determines that any portion of the petition contains false or misleading information, or the Administrator has information from other U.S. or foreign government agencies indicating that the petition contains false or misleading information;

(C) If the transaction appears to be contrary to provisions of the Vienna Convention on Substances that Deplete the Ozone Layer, the Montreal Protocol and Decisions by the Parties, or the non-compliance procedures outlined and instituted by the Implementation Committee of the Montreal Protocol;

(D) If the appropriate government agency in the exporting country has not agreed to issue an export license for the cited individual shipment of used class II controlled substance;

(E) If reclamation capacity is installed or is being installed for that specific class II controlled substance in the country of recovery or country of export and the capacity is funded in full or in part through the Multilateral Fund.

(ii) Within ten (10) working days after receipt of the objection notice, the importer may re-petition the Administrator, only if the Administrator indicated “insufficient information” as the basis for the objection notice. If no appeal is taken by the tenth working day after the date on the objection notice, the objection shall become final. Only one re-petition will be accepted for any original petition received by EPA.

(iii) Any information contained in the re-petition which is inconsistent with the original petition must be identified and a description of the reason for the inconsistency must accompany the re-petition.

(iv) In cases where the Administrator does not object to the petition based on the criteria listed in paragraph (c)(4)(i) of this section, the Administrator will issue a non-objection notice.

(v) To pass the approved used class II controlled substances through U.S. Customs, the non-objection notice issued by EPA must accompany the shipment through U.S. Customs.

(vi) If for some reason, following EPA’s issuance of a non-objection notice, new information is brought to EPA’s attention which shows that the non-objection notice was issued based on false information, then EPA has the right to:

(A) Revoke the non-objection notice;

(B) Pursue all means to ensure that the class II controlled substance is not imported into the U.S.; and

(C) Take appropriate enforcement actions.

(vii) A person receiving the non-objection notice is permitted to import the individual shipment only within one year of the date stamped on the non-objection notice.

(viii) A person receiving a non-objection notice from the Administrator for a petition to import used class II controlled substances must maintain the following records:

(A) A copy of the petition;

(B) The EPA non-objection notice;

(C) The bill of lading for the import; and

(D) The U.S. Customs entry number.

(5) Recordkeeping for transshipments—Importers. Any person who transships a class II controlled substance must maintain records that indicate:

(i) That the class II controlled substance shipment originated in a foreign country;

(ii) That the class II controlled substance shipment is destined for another foreign country; and

(iii) That the class II controlled substance shipment will not enter interstate commerce within the U.S.

(6) *Certification of intent to import for destruction.* For each individual shipment of a class II controlled substance imported with the intent to destroy that substance, an importer must submit electronically to the Administrator, at least 30 working days before the shipment is to leave the foreign port of export, the following information:

(i) Name, commodity code, and quantity in kilograms of each controlled substance to be imported;

(ii) Name and address of the importer, the importer ID number, and the contact person’s name, email address, and phone number;

(iii) Name and address of any intermediary who aggregates controlled substances imported for destruction, and the contact person’s name, email address, and phone number;

(iv) The U.S. port of entry for the import, the expected date of shipment and the vessel transporting the material. If at the time of submitting the certification of intent to import for destruction the importer does not know the U.S. port of entry, the expected date of shipment and the vessel transporting the material, and the importer receives a non-objection notice for the individual shipment in the petition, the importer is required to notify the Administrator of this information prior

Environmental Protection Agency

§ 82.24

to the entry of the individual shipment into the United States;

(v) Name, address, contact person, email address, and phone number of the responsible party at the destruction facility;

(vi) The export license, application for an export license, or official communication acknowledging the export from the appropriate government agency in the country of export and, if recovered in another country, the export license or official communication from the appropriate government agency in that country, and quantity authorized for export in kilograms on the export license, and an English translation of these documents; and

(vii) A certification of accuracy of the information submitted in the certification.

(7) *Destruction verification.* For each individual shipment of a class II controlled substance imported with the intent to destroy that substance, an importer must submit to the Administrator a copy of the destruction verification within 30 days after destruction of the controlled substance(s).

(8) *Review of certification of intent to import for destruction.* (i) Starting on the first working day following receipt by the Administrator of a certification of intent to import a class II controlled substance for destruction, the Administrator will initiate a review of the information submitted under paragraph (c)(6) of this section and take action within 30 working days to issue either an objection notice or a non-objection notice for the individual shipment to the person who submitted the certification of intent to import the class II controlled substance for destruction.

(ii) The Administrator may issue an objection notice if the petition lacks or appears to lack any of the information required under paragraph (c)(6) of this section or for the reasons listed in paragraphs (c)(4)(i)(B) through (E) of this section.

(iii) In cases where the Administrator does not object to the petition, the Administrator will issue a non-objection notice.

(iv) To pass the approved class II controlled substances through U.S. Customs, the non-objection notice issued

by EPA must accompany the shipment through U.S. Customs.

(v) If for some reason, following EPA's issuance of a non-objection notice, new information is brought to EPA's attention which shows that the non-objection notice was issued based on false information, then EPA has the right to:

(A) Revoke the non-objection notice;

(B) Pursue all means to ensure that the class II controlled substance is not imported into the United States; and

(C) Take appropriate enforcement actions.

(9) *Timing of import.* A person receiving the non-objection notice is permitted to import the individual shipment only within one year of the date stamped on the non-objection notice.

(10) *Additional recordkeeping requirements—importers of used, recycled, or reclaimed controlled substances.* A person receiving a non-objection notice from the Administrator for a certification of intent to import class II controlled substances for destruction must maintain the following records:

(i) A copy of the certificate of intent to import for destruction;

(ii) The EPA non-objection notice;

(iii) A copy of the export license, export license application, or official communication from the appropriate government agency in the country of export;

(iv) U.S. Customs entry documents for the import that must include one of the commodity codes from appendix K to this subpart;

(v) The date, amount, and type of controlled substance sent for destruction, per shipment;

(vi) An invoice from the destruction facility verifying the shipment was received;

(vii) A copy of the destruction verification from the destruction facility; and

(viii) An English translation of the document in paragraph (c)(10)(iii) of this section.

(11) *Recordkeeping requirements—aggregators.* A person identified in paragraph (c)(6)(iii) of this section as aggregating a controlled substance prior to destruction must:

(i) Maintain transactional records that include the name and address of

the entity from whom they received the controlled substance imported for destruction;

(ii) Maintain transactional records that include the name and address of the entity to whom they sent the controlled substance imported for destruction;

(iii) Maintain records that include the date and quantity of the imported controlled substance received for destruction;

(iv) Maintain records that include the date and quantity of the imported controlled substance sent for destruction; and

(v) If the person is the final aggregator of such a controlled substance before the material is destroyed, maintain a copy of the destruction verification.

(d) *Exporters.* Persons (“exporters”) who export class II controlled substances during a control period must comply with the following reporting requirements:

(1) *Reporting requirements—exporters.* For any exports of class II controlled substances not reported under paragraph (b)(2) of this section (reporting for producers of class II controlled substances), each exporter who exported a class II controlled substance must submit to the Administrator the following information within 30 days after the end of each quarter in which the unreported exports left the United States:

(i) The names and addresses of the exporter and the recipient of the exports;

(ii) The exporter’s Employer Identification Number;

(iii) The type and quantity of each class II controlled substance exported, including the quantity of controlled substance that is used, reclaimed, or recycled;

(iv) The date on which, and the port from which, the class II controlled substances were exported from the U.S. or its territories;

(v) The country to which the class II controlled substances were exported;

(vi) The quantity (in kilograms) exported to each Article 5 country;

(vii) The commodity code for the class II controlled substances shipped, which must be one of those listed in Appendix K to this subpart;

(viii) For persons reporting transformation or destruction, the invoice or sales agreement containing language similar to the transformation verifications that the purchaser or recipient of imported class II controlled substances intends to transform those substances, or destruction verifications showing that the purchaser or recipient intends to destroy the class II controlled substances (as provided in paragraph (e) of this section).

(2) [Reserved]

(3) *Reporting Article 5 allowances—Exporters.* In addition to the information required in paragraph (d)(1) of this section, any exporter using Article 5 allowances must also provide the following to the Administrator:

(i) The Employer Identification Number of the shipper or their agent; and

(ii) The exporting vessel on which the class II controlled substances were shipped.

(4) *Reporting used class II controlled substances—Exporters.* Any exporter of used class II controlled substances must indicate on the bill of lading or invoice that the class II controlled substance is used, as defined in § 82.3.

(e) *Transformation and destruction.* Any person who transforms or destroys class II controlled substances must comply with the following record-keeping and reporting requirements:

(1) *Recordkeeping—Transformation and destruction.* Any person who transforms or destroys class II controlled substances produced or imported by another person must maintain the following:

(i) Copies of the invoices or receipts documenting the sale or transfer of the class II controlled substances to the person;

(ii) Records identifying the producer or importer of the class II controlled substances received by the person;

(iii) Dated records of inventories of class II controlled substances at each plant on the first day of each quarter;

(iv) Dated records of the quantity (in kilograms) of each class II controlled substance transformed or destroyed;

(v) In the case where class II controlled substances were purchased or

transferred for transformation purposes, a copy of the person's transformation verification as provided under paragraph (e)(3) of this section.

(vi) Dated records of the names, commercial use, and quantities (in kilograms) of the resulting chemical(s) when the class II controlled substances are transformed; and

(vii) Dated records of shipments to purchasers of the resulting chemical(s) when the class II controlled substances are transformed.

(viii) In the case where class II controlled substances were purchased or transferred for destruction purposes, a copy of the person's destruction verification, as provided under paragraph (e)(5) of this section.

(2) *Reporting—Transformation and destruction.* Any person who transforms or destroys class II controlled substances and who has submitted a transformation verification ((paragraph (e)(3) of this section) or a destruction verification (paragraph (e)(5) of this section) to the producer or importer of the class II controlled substances, must report the following:

(i) The names and quantities (in kilograms) of the class II controlled substances transformed for each control period within 45 days of the end of such control period; and

(ii) The names and quantities (in kilograms) of the class II controlled substances destroyed for each control period within 45 days of the end of such control period.

(3) *Reporting—Transformation.* Any person who purchases class II controlled substances for purposes of transformation must provide the producer or importer with a transformation verification that the class II controlled substances are to be used in processes that result in their transformation.

(i) The transformation verification shall include the following:

(A) Identity and address of the person intending to transform the class II controlled substances;

(B) The quantity (in kilograms) of class II controlled substances intended for transformation;

(C) Identity of shipments by purchase order number(s), purchaser account

number(s), by location(s), or other means of identification;

(D) Period of time over which the person intends to transform the class II controlled substances; and

(E) Signature of the verifying person.

(ii) [Reserved]

(4) *Reporting—Destruction.* Any person who destroys class II controlled substances shall provide EPA with a one-time report containing the following information:

(i) The destruction unit's destruction efficiency;

(ii) The methods used to record the volume destroyed;

(iii) The methods used to determine destruction efficiency;

(iv) The name of other relevant federal or state regulations that may apply to the destruction process;

(v) Any changes to the information in paragraphs (e)(4)(i), (ii), and (iii) of this section must be reflected in a revision to be submitted to EPA within 60 days of the change(s).

(5) *Reporting—Destruction.* Any person who purchases or receives and subsequently destroys class II controlled substances that were originally produced without expending allowances shall provide the producer or importer from whom it purchased or received the class II controlled substances with a verification that the class II controlled substances will be used in processes that result in their destruction.

(i) The destruction verification shall include the following:

(A) Identity and address of the person intending to destroy class II controlled substances;

(B) Indication of whether those class II controlled substances will be completely destroyed, as defined in § 82.3, or less than completely destroyed, in which case the destruction efficiency at which such substances will be destroyed must be included;

(C) Period of time over which the person intends to destroy class II controlled substances; and

(D) Signature of the verifying person.

(ii) [Reserved]

(f) *Heels—Recordkeeping and reporting.* Any person who brings into the U.S. a rail car, tank truck, or ISO tank containing a heel, as defined in § 82.3, of

Pt. 82, Subpt. A, App. A

40 CFR Ch. I (7–1–24 Edition)

class II controlled substances, must take the following actions:

(1) Indicate on the bill of lading or invoice that the class II controlled substance in the container is a heel.

(2) Report within 30 days of the end of the control period the quantity (in kilograms) brought into the U.S. and certify:

(i) That the residual quantity (in kilograms) in each shipment is no more than 10 percent of the volume of the container;

(ii) That the residual quantity (in kilograms) in each shipment will either:

(A) Remain in the container and be included in a future shipment;

(B) Be recovered and transformed;

(C) Be recovered and destroyed; or

(D) Be recovered for a non-emissive use.

(3) Report on the final disposition of each shipment within 30 days of the end of the control period.

[68 FR 2848, Jan. 21, 2003, as amended at 71 FR 41172, July 20, 2006; 81 FR 6768, Feb. 9, 2016; 85 FR 15298, Mar. 17, 2020]

**APPENDIX A TO SUBPART A OF PART 82—
CLASS I CONTROLLED SUBSTANCES**

Class 1 controlled substances	ODP
A. Group I:	
CFCl ₃ -Trichlorofluoromethane (CFC-II)	1.0
CF ₂ Cl ₂ -Dichlorodifluoromethane (CFC-12)	1.0
C ₂ F ₃ Cl ₃ -Trichlorotrifluoroethane (CFC-113)	0.8
C ₂ F ₄ Cl ₂ -Dichlorotetrafluoroethane (CFC-114)	1.0
C ₂ F ₅ Cl-Monochloropentafluoroethane (CFC-115)	0.6
All isomers of the above chemicals	
B. Group II:	
CF ₂ ClBr-Bromochlorodifluoromethane (Halon-1211)	3.0
CF ₃ Br-Bromotrifluoromethane (Halon-1301)	10.0
C ₂ F ₄ Br ₂ -Dibromotetrafluoroethane (Halon-2402)	6.0
All isomers of the above chemicals	
C. Group III:	

Class 1 controlled substances	ODP
CF ₃ Cl-Chlorotrifluoromethane (CFC-13)	1.0
C ₃ FCl ₅ -(CFC-111)	1.0
C ₂ F ₂ Cl ₄ -(CFC-112)	1.0
C ₃ FCl ₄ -(CFC-211)	1.0
C ₃ F ₂ Cl ₄ -(CFC-212)	1.0
C ₃ F ₃ Cl ₃ -(CFC-213)	1.0
C ₃ F ₄ Cl ₂ -(CFC-214)	1.0
C ₃ F ₅ Cl ₂ -(CFC-215)	1.0
C ₃ F ₆ Cl ₂ -(CFC-216)	1.0
C ₃ F ₇ Cl-(CFC-217)	1.0
All isomers of the above chemicals	
D. Group IV: CCl ₄ -Carbon Tetrachloride	1.1
E. Group V:	
C ₂ H ₃ Cl ₃ -1,1,1 Trichloroethane (Methyl chloroform)	0.1
All isomers of the above chemical except 1,1,2-trichloroethane	
F. Group VI: CH ₃ Br—Bromomethane (Methyl Bromide)	0.7
G. Group VII:	
CHFBr ₂	1.00
CHF ₂ Br (HBFC-2201)	0.74
CH ₂ FBr	0.73
C ₂ HFBr ₄	0.3–0.8
C ₂ HF ₂ Br ₃	0.5–1.8
C ₂ HF ₃ Br ₂	0.4–1.6
C ₂ HF ₄ Br	0.7–1.2
C ₂ H ₂ FBr ₃	0.1–1.1
C ₂ H ₂ F ₂ Br ₂	0.2–1.5
C ₂ H ₂ F ₃ Br	0.7–1.6
C ₂ H ₂ FBr ₂	0.1–1.7
C ₂ H ₃ F ₂ Br	0.2–1.1
C ₂ H ₄ FBr	0.07–0.1
C ₃ HFBr ₆	0.3–1.5
C ₃ HF ₂ Br ₅	0.2–1.9
C ₃ HF ₃ Br ₄	0.3–1.8
C ₃ HF ₄ Br ₃	0.5–2.2
C ₃ HF ₅ Br ₂	0.9–2.0
C ₃ HF ₆ Br	0.7–3.3
C ₃ H ₂ FBr ₅	0.1–1.9
C ₃ H ₂ F ₂ Br ₄	0.2–2.1
C ₃ H ₂ F ₃ Br ₃	0.2–5.6
C ₃ H ₂ F ₄ Br ₂	0.3–7.5
C ₃ H ₂ F ₅ Br	0.9–14
C ₃ H ₃ FBr ₄	0.08–1.9
C ₃ H ₃ F ₂ Br ₃	0.1–3.1
C ₃ H ₃ F ₃ Br ₂	0.1–2.5
C ₃ H ₃ F ₄ Br	0.3–4.4
C ₃ H ₄ FBr ₃	0.03–0.3
C ₃ H ₄ F ₂ Br ₂	0.1–1.0
C ₃ H ₄ F ₃ Br	0.07–0.8
C ₃ H ₅ FBr ₂	0.04–0.4
C ₃ H ₅ F ₂ Br	0.07–0.8
C ₃ H ₆ FB	0.02–0.7
H. Group VIII:	
CH ₂ BrCl (Chlorobromomethane)	0.12

[60 FR 24986, May 10, 1995, as amended at 68 FR 42892, July 18, 2003]

APPENDIX B TO SUBPART A OF PART 82—CLASS II CONTROLLED SUBSTANCES^{a b}

Controlled substance	ODP
1. HCFC-21 (CHFCI ₂) Dichlorofluoromethane	0.04
2. HCFC-22 (CHF ₂ Cl) Monochlorodifluoromethane	0.055
3. HCFC-31 (CH ₂ FCI) Monochlorofluoromethane	0.02
4. HCFC-121 (C ₂ HFCl ₄) Tetrachlorofluoroethane	0.01–0.04
5. HCFC-122 (C ₂ HF ₂ Cl ₃) Trichlorodifluoroethane	0.02–0.08
6. HCFC-123 (C ₂ HF ₃ Cl ₂) Dichlorotrifluoroethane	0.02
7. HCFC-124 (C ₂ HF ₄ Cl) Monochlorotetrafluoroethane	0.022
8. HCFC-131 (C ₂ H ₂ FCI ₃) Trichlorofluoroethane	0.007–0.05

Environmental Protection Agency

Pt. 82, Subpt. A, App. D

Controlled substance	ODP
9. HCFC-132 (C2H2F2Cl2) Dichlorodifluoroethane	0.008–0.05
10. HCFC-133 (C2H2F3Cl) Monochlorotrifluoroethane	0.02–0.06
11. HCFC-141 (C2H3F2Cl) Dichlorofluoroethane	0.005–0.07
12. HCFC-141b (CH3CFCl2) Dichlorofluoroethane	0.11
13. HCFC-142 (C2H3F2Cl) Chlorodifluoroethane	0.008–0.07
14. HCFC-142b (CH3CF2Cl) Monochlorodifluoroethane	0.065
15. HCFC-151 (C2H4FCI) Chlorofluoroethane	0.003–0.005
16. HCFC-221 (C3HFCI6) Hexachlorofluoropropane	0.015–0.07
17. HCFC-222 (C3HF2CI5) Pentachlorodifluoropropane	0.01–0.09
18. HCFC-223 (C3HF3CI4) Tetrachlorotrifluoropropane	0.01–0.08
19. HCFC-224 (C3HF4CI3) Trichlorotetrafluoropropane	0.01–0.09
20. HCFC-225 (C3HF5CI2) Dichloropentafluoropropane	0.02–0.07
21. HCFC-225ca (CF3CF2CHCl2) Dichloropentafluoropropane	0.025
22. HCFC-225cb (CF2ClCF2CHClF) Dichloropentafluoropropane	0.033
23. HCFC-226 (C3HF6CI) Monochlorohexafluoropropane	0.02–0.1
24. HCFC-231 (C3H2FCI5) Pentachlorofluoropropane	0.05–0.09
25. HCFC-232 (C3H2F2CI4) Tetrachlorodifluoropropane	0.008–0.1
26. HCFC-233 (C3H2F3CI3) Trichlorotrifluoropropane	0.007–0.23
27. HCFC-234 (C3H2F4CI2) Dichlorotetrafluoropropane	0.01–0.28
28. HCFC-235 (C3H2F5CI) Monochloropentafluoropropane	0.03–0.52
29. HCFC-241 (C3H3FCI4) Tetrachlorofluoropropane	0.004–0.09
30. HCFC-242 (C3H3F2CI3) Trichlorodifluoropropane	0.005–0.13
31. HCFC-243 (C3H3F3CI2) Dichlorotrifluoropropane	0.007–0.12
32. HCFC-244 (C3H3F4CI) Monochlorotetrafluoropropane	0.009–0.14
33. HCFC-251 (C3H4FCI3) Monochlorotetrafluoropropane	0.001–0.01
34. HCFC-252 (C3H4F2CI2) Dichlorodifluoropropane	0.005–0.04
35. HCFC-253 (C3H4F3CI) Monochlorotrifluoropropane	0.003–0.03
36. HCFC-261 (C3H5FCI2) Dichlorofluoropropane	0.002–0.02
37. HCFC-262 (C3H5F2CI) Monochlorodifluoropropane	0.002–0.02
38. HCFC-271 (C3H6FCI) Monochlorofluoropropane	0.001–0.03

* According to Annex C of the Montreal Protocol, "Where a range of ODPs is indicated, the highest value in that range shall be used for the purposes of the Protocol. The ODPs listed as single value have been determined from calculations based on laboratory measurements. Those listed as a range are based on estimates and are less certain. The range pertains to an isomeric group. The upper value is the estimate of the ODP of the isomer with the highest ODP, and the lower value is the estimate of the ODP of the isomer with the lowest ODP.

° This table includes all isomers of the substances above, regardless of whether the isomer is explicitly listed on its own.

[79 FR 64288, Oct. 28, 2014]

APPENDIX C TO SUBPART A OF PART 82
[RESERVED]

APPENDIX D TO SUBPART A OF PART 82—
HARMONIZED TARIFF SCHEDULE DESCRIPTION OF PRODUCTS THAT MAY CONTAIN CONTROLLED SUBSTANCES IN APPENDIX A, CLASS I, GROUPS I AND II

This appendix is based on information provided by the Ozone Secretariat of the United Nations Ozone Environment Programme.** The Appendix lists available U.S. harmonized tariff schedule codes identifying headings and subheadings for Annex D products that may contain controlled substances.

The Harmonized Tariff Schedule of the United States uses an enumeration system to identify products imported and exported to and from the U.S. This system relies on a four digit heading, a four digit subheading

and additional two digit statistical suffix to characterize products. The United States uses the suffix for its own statistical records and analyses. This Appendix lists only headings and subheadings.

While some can be readily associated with harmonized system codes, many products cannot be tied to HS classifications unless their exact composition and the presentation are known. It should be noted that the specified HS classifications represent the most likely headings and subheadings which may contain substances controlled by the Montreal Protocol. The codes given should only be used as a starting point; further verification is needed to ascertain whether or not the products actually contain controlled substances.

CATEGORY 1. AUTOMOBILE AND TRUCK AIR
CONDITIONING UNITS (WHETHER INCORPORATED IN VEHICLES OR NOT)

There are no separate code numbers for air conditioning units specially used in automobiles and trucks. Although a code has been proposed for car air conditioners, it is not yet officially listed in the Harmonized

** "A Note Regarding the Harmonized System Code Numbers for the Products Listed in Annex D." Adopted by Decision IV/15 paragraph 3, of the Fourth Meeting of the Parties in Copenhagen, 23–25 November, 1992.

Pt. 82, Subpt. A, App. D

40 CFR Ch. I (7–1–24 Edition)

Tariff Schedule (see category 2). The following codes apply to the vehicles potentially containing air conditioning units.

<i>Heading/Subheading</i>	<i>Article Description</i>
8701.(10, 20, 30, 90)***	Tractors.
8702	Public-transport type passenger motor vehicles.
8702.10	With compression-ignition internal-combustion piston engine (diesel or semi-diesel).
8702.90	Other.
8703	Motor cars and other motor vehicles principally designed for the transport of persons (other than those of heading 8702), including station wagons and racing cars.
8703.10	Vehicles specially designed for traveling on snow; golf carts and similar vehicles; includes subheading 10.10 and 10.50.
8703.(21, 22, 23, 24)	Other vehicles, with spark-ignition internal combustion reciprocating engines.
8703.(31, 32, 33, 90)	Other vehicles, with compression-ignition internal combustion piston engine (diesel or semi-diesel).
8704	Motor vehicles for the transport of goods.
8704.10.(10, 50)	Dumpers designed for off-highway use.
8704.(21, 22, 23)	Other, with compression-ignition internal combustion piston engine (diesel or semi-diesel).
8704.(31, 32, 90)	Other, with compression-ignition internal combustion piston engine.
8705	Special purpose motor vehicles, other than those principally designed for the transport of persons or goods (for example, wreckers, mobile cranes, fire fighting vehicles, concrete mixers, road sweepers, spraying vehicles, mobile workshops, mobile radiological units).
8705.10	Crane lorries.
8705.20	Mobile drilling derricks.
8705.30	Fire fighting vehicles.
8705.90	Other.

***At this time vehicle air conditioning units are considered components of vehicles or are classified under the general category for air conditioning and refrigeration equipment. Vehicles containing air conditioners are therefore considered products containing controlled substances.

CATEGORY 2. DOMESTIC AND COMMERCIAL REFRIGERATION AND AIR CONDITIONING/HEAT PUMP EQUIPMENT

Domestic and commercial air conditioning and refrigeration equipment fall primarily under headings 8415 and 8418.

<i>Heading/Subheading</i>	<i>Article Description</i>
8415	Air conditioning machines, comprising a motor-driven fan and elements for changing the temperature and humidity, including those machines in which the humidity cannot be separately regulated.
8415.20	Proposed code for air conditioning of a kind used for persons, in motor vehicles.
8415.10.00	A/C window or wall types, self-contained.
8415.81.00	Other, except parts, incorporating a refrigerating unit and a valve for reversal of the cooling/heat cycle.
8415.82.00	Other, incorporating a refrigerating unit— Self-contained machines and remote condenser type air conditioners (not for year-round use). Year-round units (for heating and cooling). Air Conditioning evaporator coils. Dehumidifiers. Other air conditioning machines incorporating a refrigerating unit.
8415.83	Automotive air conditioners.

Environmental Protection Agency

Pt. 82, Subpt. A, App. D

<i>Heading/Subheading</i>	<i>Article Description</i>
8418	Refrigerators, freezers and other refrigerating or freezing equipment, electric or other; heat pumps, other than air conditioning machines of heading 8415; parts thereof.
8418.10.00	Combined refrigerator-freezers, fitted with separate external doors.
8418.21.00	Refrigerators, household type, Compression type.
8418.22.00	Absorption type, electrical.
8418.29.00	Other.
8418.30.00	Freezers of the chest type.
8418.40	Freezers of the upright type.
8418.50.0040	Other refrigerating or freezing chests, cabinets, display counters, showcases and similar refrigerating or freezing furniture.
8418.61.00	Other refrigerating or freezing equipment; heat pumps.
8418.69	Other— Icemaking machines. Drinking water coolers, self-contained. Soda fountain and beer dispensing equipment. Centrifugal liquid chilling refrigerating units. Absorption liquid chilling units. Reciprocating liquid chilling units. Other refrigerating or freezing equipment (household or other).
8479.89.10	Dehumidifiers (other than those under 8415 or 8424 classified as “machines and mechanical appliances having individual functions, not specified or included elsewhere”).

CATEGORY 3. AEROSOL PRODUCTS

An array of different products use controlled substances as aerosols and in aerosol applications. Not all aerosol applications use controlled substances, however. The codes given below represent the most likely classifications for products containing controlled substances. The product codes listed include ****:

- varnishes
- perfumes
- preparations for use on hair
- preparations for oral and dental hygiene

- shaving preparations
- personal deodorants, bath preparations
- prepared room deodorizers
- soaps
- lubricants
- polishes and creams
- explosives
- insecticides, fungicides, herbicides, disinfectants
- arms and ammunition
- household products such as footwear or leather polishes
- other miscellaneous products

<i>Heading/Subheading</i>	<i>Article Description</i>
3208	Paints and varnishes***** (including enamels and lacquers) based on synthetic polymers of chemically modified natural polymers, dispersed or dissolved in a non-aqueous medium.
3208.10	Based on polyesters.
3208.20	Based on acrylic or vinyl polymers.
3208.90	Other.

*****Other categories of products that may contain controlled substances are listed below. EPA is currently working to match them with appropriate codes. They include: coatings and electronic equipment (e.g., electrical motors), coatings or cleaning fluids for aircraft maintenance, mold release agents (e.g. for production of plastic or elastomeric materials), water and oil repellent (poten-

tially under HS 3402), spray undercoats (potentially under “paints and varnishes”), spot removers, brake cleaners, safety sprays (e.g., mace cans), animal repellent, noise horns (e.g., for use on boats), weld inspection developers, freezants, gum removers, intruder alarms, tire inflators, dusters (for electronic and non-electronic applications), spray shoe polish, and suede protectors.

<i>Heading/Subheading</i>	<i>Article Description</i>
3209	Paints and varnishes (including enamels and lacquers) based on synthetic polymers or chemically modified natural polymers, dispersed or dissolved in an aqueous medium.
3209.10	Based on acrylic or vinyl polymers.
3209.90	Other.
3210.00	Other paints and varnishes (including enamels, lacquers and distempers) and prepared water pigments of a kind used for finishing leather.
3212.90	Dyes and other coloring matter put up in forms or packings for retail sale.
3303.00	Perfumes and toilet waters.
3304.30	Manicure or pedicure preparations.
3305.10	Shampoos.
3305.20	Preparations for permanent waving or straightening.
3305.30	Hair lacquers.
3305.90	Other hair preparations.
3306.10	Dentrifices.
3306.90	Other dental (this may include breath sprays).
3307.10	Pre-shave, shaving or after-shave preparations.
3307.20	Personal deodorants and antiperspirants.
3307.30	Perfumed bath salts and other bath preparations.
3307.49	Other (this may include preparations for perfuming or deodorizing rooms, including odoriferous preparations used during religious rites, whether or not perfumed or having disinfectant properties).
3307.90	Other (this may include depilatory products and other perfumery, cosmetic or toilet preparations, not elsewhere specified or included)
3403	Lubricating preparations (including cutting-oil preparations, bolt or nut release preparations, anti-rust or anti-corrosion preparations and mould release preparations, based on lubricants), and preparations of a kind used for the oil or grease treatment of textile materials, leather, fur skins or other materials, but excluding preparations containing, as basic constituents, 70 percent or more by weight of petroleum oils or of oils obtained from bituminous minerals.
3402	Organic surface-active agents (other than soap); surface-active preparations, washing preparations and cleaning operations, whether or not containing soap, other than those of 3401.
3402.20	Preparations put up for retail sale.
3402.19	Other preparations containing petroleum oils or oils obtained from bituminous minerals.
3403	Lubricating preparations consisting of mixtures containing silicone greases or oils, as the case may be.
2710.00	Preparations not elsewhere specified or included, containing by weight 70 percent or more of petroleum oils or of oils obtained from bituminous minerals, these oils being the basic constituents of the preparations.
3403.11	Lubricants containing petroleum oils or oils obtained from bituminous minerals used for preparations from the treatment of textile materials, leather, fur skins or other materials.
3403.19	Other preparations containing petroleum oils or oils obtained from bituminous minerals.
3405	Polishes and creams, for footwear, furniture, floors, coachwork, glass or metal, scouring pastes and powders and similar preparations excluding waxes of heading 3404.
3405.10	Polishes and creams for footwear or leather.
3405.20	Polishes for wooden furniture, floors or other woodwork.
36	Explosives.

Environmental Protection Agency

Pt. 82, Subpt. A, App. D

<i>Heading/Subheading</i>	<i>Article Description</i>
3808	Insecticides, rodenticides, fungicides, herbicides, anti-sprouting products and plant-growth regulators, disinfectants and similar products, put up in forms or packings for retail sale or as preparations or articles (for example, sulphur-treated bands, wicks and candles, and fly papers).
3808.10	Insecticides.
3808.20	Fungicides.
3808.30	Herbicides, anti-sprouting products and plant growth regulators.
3808.40	Disinfectants.
3808.90	Other insecticides, fungicides.
3809.10	Finishing agents, dye carriers to accelerate the dyeing or fixing of dye-stuffs and other products and preparations (for example, dressings and mordants) of a kind used in the textile, paper, leather or like industries, not elsewhere specified or included, with a basis of amylaceous substances.
3814	Organic composite solvents and thinners (not elsewhere specified or included) and the prepared paint or varnish removers.
3910	Silicones in primary forms.
9304	Other arms (for example, spring, air or gas guns and pistols, truncheons), excluding those of heading No. 93.07. Thus, aerosol spray cans containing tear gas may be classified under this subheading.
0404.90	Products consisting of natural milk constituents, whether or not containing added sugar or other sweetening matter, not elsewhere specified or included.
1517.90	Edible mixtures or preparations of animal or vegetable fats or oils or of fractions of different fats or oils of this chapter, other than edible fats or oils or their fractions of heading No. 15.16.
2106.90	Food preparations not elsewhere specified or included.
***** Although paints do not generally use contain controlled substances, some varnishes use CFC 113 and 1,1,1, trichlorethane as solvents.	

CATEGORY 4. PORTABLE FIRE EXTINGUISHERS

<i>Heading/Subheading</i>	<i>Article Description</i>
8424	Mechanical appliances (whether or not hand operated) for projecting, dispersing, or spraying liquids or powders; fire extinguishers whether or not charged, spray guns and similar appliances; steam or sand blasting machines and similar jet projecting machines.
8424.10	Fire extinguishers, whether or not charged.

CATEGORY 5. INSULATION BOARDS, PANELS AND PIPE COVERS

These goods have to be classified according to their composition and presentation. For example, if the insulation materials are

made of polyurethane, polystyrene, polyolefin and phenolic plastics, then they may be classified Chapter 39, for "Plastics and articles thereof". The exact description of the products at issue is necessary before a classification can be given.*****

<i>Heading/Subheading</i>	<i>Article Description</i>
3917.21 to 3917.39	Tubes, pipes and hoses of plastics.
*****This category may include insulating board for building panels and windows and doors. It also includes rigid appliance insulation for pipes, tanks, trucks, trailers, containers, train cars & ships, refrigerators, freezers, beverage vending machines, bulk beverage dispensers, water coolers and heaters and ice machines.	

Heading/Subheading	Article Description
3920.10 to 3920.99	Plates, sheets, film, foil and strip made of plastics, non-cellular and not reinforced, laminated, supported or similarly combined with other materials.
3921.11 to 3921.90	Other plates, sheets, film, foil and strip, made of plastics.
3925.90	Builders' ware made of plastics, not elsewhere specified or included.
3926.90	Articles made of plastics, not elsewhere specified or included.

CATEGORY 6. PRE-POLYMERS

According to the Explanatory Notes to the Harmonized Commodity Description and Coding System, "prepolymers are products which are characterized by some repetition of monomer units although they may contain unreacted monomers. Prepolymers are not normally used as such but are intended

to be transformed into higher molecular weight polymers by further polymerization. Therefore the term does not cover finished products, such as di-isobutylenes or mixed polyethylene glycols with very low molecular weight. Examples are epoxides based with epichlorohydrin, and polymeric isocyanates."

Heading/Subheading	Article Description
3901	Pre-polymers based on ethylene (in primary forms).
3902	Pre-polymers based on propylene or other olefins (in primary forms).
3903, 3907, 3909	Pre-polymers based on styrene (in primary forms), epoxide and phenols.

APPENDIX E TO SUBPART A OF PART 82—
ARTICLE 5 PARTIES

Parties operating under Article 5 of the Montreal Protocol as of March 26, 2014 are listed below. An updated list can be located at: http://ozone.unep.org/new_site/en/parties_under_article5_para1.php.

Afghanistan, Albania, Algeria, Angola, Antigua & Barbuda, Argentina, Armenia, Bahamas, Bahrain, Bangladesh, Barbados, Belize, Benin, Bhutan, Bolivia (Plurinational State of), Bosnia and Herzegovina, Botswana, Brazil, Brunei Darussalam, Burkina Faso, Burundi, Cambodia, Cameroon, Cape Verde, Central African Republic, Chad, Chile, China, Colombia, Comoros, Congo, Congo (Democratic Republic of), Cook Islands, Costa Rica, Côte d'Ivoire, Cuba, Djibouti, Dominica, Dominican Republic, Ecuador, Egypt, El Salvador, Equatorial Guinea, Eritrea, Ethiopia, Fiji, Gabon, Gambia, Georgia, Ghana, Grenada, Guatemala, Guinea, Guinea Bissau, Guyana, Haiti, Honduras, India, Indonesia, Iran (Islamic Republic of), Iraq, Jamaica, Jordan, Kenya, Kiribati, Korea (Democratic People's Republic of), Korea (Republic of), Kuwait, Kyrgyzstan, Lao (Peo-

ple's Democratic Republic), Lebanon, Lesotho, Liberia, Libya, Madagascar, Malawi, Malaysia, Maldives, Mali, Marshall Islands, Mauritania, Mauritius, Mexico, Micronesia (Federal States of), Moldova (Republic of), Mongolia, Montenegro, Morocco, Mozambique, Myanmar, Namibia, Nauru, Nepal, Nicaragua, Niger, Nigeria, Niue, Oman, Pakistan, Palau, Panama, Papua New Guinea, Paraguay, Peru, Philippines, Qatar, Rwanda, Saint Kitts and Nevis, Saint Lucia, Saint Vincent & the Grenadines, Samoa, Sao Tome and Principe, Saudi Arabia, Senegal, Serbia, Seychelles, Sierra Leone, Singapore, Solomon Islands, Somalia, South Africa, South Sudan*, Sri Lanka, Sudan, Suriname, Swaziland, Syrian Arab Republic, Tanzania (United Republic of), Thailand, The Former Yugoslav Republic of Macedonia, Timor-Leste, Togo, Tonga, Trinidad and Tobago, Tunisia, Turkey, Turkmenistan, Tuvalu, Uganda, United Arab Emirates, Uruguay, Vanuatu, Venezuela (Bolivarian Republic of), Viet Nam, Yemen, Zambia, Zimbabwe.

*temporarily categorized as Article 5 pending submission of ODS consumption data

[79 FR 16687, Mar. 26, 2014]

APPENDIX F TO SUBPART A OF PART 82—LISTING OF OZONE-DEPLETING CHEMICALS

Controlled substance	ODP	AT L	CLP	BLP
A. Class I:				
1. Group I:				

Environmental Protection Agency

Pt. 82, Subpt. A, App. F

Controlled substance	ODP	AT L	CLP	BLP
CFCl ₃ -Trichlorofluoromethane (CFC-11)	1.0	60.0	1.0	0.00
CF ₂ Cl ₂ -Dichlorodifluoromethane (CFC-12)	1.0	120.0	1.5	0.00
C ₂ F ₃ Cl ₃ -Trichlorotrifluoroethane (CFC-113) ...	0.8	90.0	1.11	0.00
C ₂ F ₄ Cl ₂ -Dichlorotetrafluoroethane (CFC-114)	1.0	200.00	1.8	0.00
C ₂ F ₅ Cl-Monochloropentafluoroethane (CFC-115)	0.6	400.0	2.0	0.00
All isomers of the above chemicals		[Reserved]		
2. Group II:				
CF ₂ ClBr-Bromochlorodifluoromethane (Halon-1211)	3.0	12	0.06	0.13
.....		-18	-0.08	-0.03
CF ₃ Br-Bromotrifluoromethane (Halon-1301) ...	10.0	72	0.00	1.00
.....		-107		
C ₂ F ₄ Br ₂ -Dibromotetrafluoroethane (Halon-2402)	6.0	23	0.00	0.30
.....		-28		-0.37
All isomers of the above chemicals		[Reserved]		
3. Group III:				
CF ₃ Cl-Chlorotrifluoromethane (CFC-13)	1.0	120	0.88	0.00
.....	-250	-1.83		
C ₂ FCl ₅ - (CFC-111)	1.0	60	1.04	0.00
.....	-90	-1.56		
C ₂ F ₂ Cl ₄ - (CFC-112)	1.0	60	0.90	0.00
.....	-90	-1.35		
C ₃ FCl ₇ - (CFC-211)	1.0	100	1.76	0.00
.....	-500	-8.81		
C ₃ F ₂ Cl ₆ - (CFC-212)	1.0	100	1.60	0.00
.....	-500	-7.98		
C ₃ F ₃ Cl ₅ - (CFC-213)	1.0	100	1.41	0.00
.....	-500	-7.06		
C ₃ F ₄ Cl ₄ - (CFC-214)	1.0	100	1.20	0.00
.....	-500	-6.01		
C ₃ F ₅ Cl ₃ - (CFC-215)	1.0	100	0.96	0.00
.....	-500	-4.82		
C ₃ F ₆ Cl ₂ - (CFC-216)	1.0	100	0.69	0.00
.....	-500	-3.45		
C ₃ F ₇ Cl- (CFC-217)	1.0	100	0.37	0.00
.....	-500	-1.87		
All isomers of the above chemicals		[Reserved]		
4. Group IV:				
CCl ₄ -Carbon Tetrachloride	1.1	50.0	1.0	0.00
5. Group V:				
C ₂ H ₃ Cl ₃ -1,1,1 Trichloroethane (Methyl chloroform)	0.1	6.3	0.11	0.00
All isomers of the above chemical except 1,1,2-trichloroethane		[Reserved]		
6. Group VI:				
CH ₃ Br-Bromomethane (Methyl Bromide)	0.7		[Reserved]	
7. Group VII:				
CHFBr ₂ -	1.00		[Reserved]	
CHF ₂ Br-(HBFC-22B1)	0.74		[Reserved]	
CH ₂ FBr	0.73		[Reserved]	
C ₂ HFBr ₄	0.3-0.8		[Reserved]	
C ₂ HF ₂ Br ₃	0.5-1.8		[Reserved]	
C ₃ HF ₃ Br ₂	0.4-1.6		[Reserved]	
C ₂ HF ₄ Br	0.7-1.2		[Reserved]	
C ₂ H ₂ FBr ₃	0.1-1.1		[Reserved]	
C ₂ H ₂ F ₂ Br ₂	0.2-1.5		[Reserved]	
C ₂ H ₂ F ₃ Br	0.7-1.6		[Reserved]	
C ₂ H ₃ FBr ₂	0.1-1.7		[Reserved]	
C ₂ H ₃ F ₂ Br	0.2-1.1		[Reserved]	
C ₂ H ₄ FBr	0.07-0.1		[Reserved]	
C ₃ HFBr ₆	0.3-1.5		[Reserved]	
C ₃ HF ₂ Br ₅	0.2-1.9		[Reserved]	
C ₃ HF ₃ Br ₄	0.3-1.8		[Reserved]	
C ₃ HF ₄ Br ₃	0.5-2.2		[Reserved]	
C ₃ HF ₅ Br ₂	0.9-2.0		[Reserved]	
C ₃ HF ₆ Br	0.7-3.3		[Reserved]	
C ₃ H ₂ FBr ₅	0.1-1.9		[Reserved]	
C ₃ H ₂ F ₂ Br ₄	0.2-2.1		[Reserved]	
C ₃ H ₂ F ₃ Br ₃	0.2-5.6		[Reserved]	
C ₃ H ₂ F ₄ Br ₂	0.3-7.5		[Reserved]	
C ₃ H ₂ F ₅ Br	0.9-1.4		[Reserved]	
C ₃ H ₃ FBR ₄	0.08-1.9		[Reserved]	

Controlled substance	ODP	AT L	CLP	BLP
C ₃ H ₃ F ₂ Br ₃	0.1–3.1		[Reserved]	
C ₃ H ₃ F ₂ Br ₂	0.1–2.5		[Reserved]	
C ₃ H ₃ F ₄ Br	0.3–4.4		[Reserved]	
C ₃ H ₄ FBr ₃	0.03–0.3		[Reserved]	
C ₃ H ₄ F ₂ Br ₂	0.1–1.0		[Reserved]	
C ₃ H ₄ F ₃ Br	0.07–0.8		[Reserved]	
C ₃ H ₅ FBr ₂	0.04–0.4		[Reserved]	
C ₃ H ₅ F ₂ Br	0.07–0.8		[Reserved]	
C ₃ H ₆ FB	0.02–0.7		[Reserved]	
8. Group VIII: CH ₂ BrCl (Chlorobromomethane)	0.12		[Reserved]	
B. Class II:				
CHFCI ₂ -Dichlorofluoromethane (HCFC-21)	[Reserved]	2.1	0.03	0.00
CHF ₂ Cl-Chlorodifluoromethane (HCFC-22)	0.05	15.3	0.14	0.00
CH ₂ FCl-Chlorofluoromethane (HCFC-31)	[Reserved]	1.44	0.02	0.00
C ₂ HFCl ₂ - (HCFC-121)	[Reserved]	0.6	0.01	0.00
C ₂ HF ₂ Cl ₃ - (HCFC-122)	[Reserved]	1.4	0.02	0.00
C ₂ HF ₃ Cl ₂ - (HCFC-123)	0.02	1.6	0.016	0.00
C ₂ HF ₄ Cl- (HCFC-124)	0.02	6.6	0.04	0.00
C ₂ H ₂ FCl ₃ - (HCFC-131)	[Reserved]	4.0	0.06	0.00
C ₂ H ₂ F ₂ Cl ₂ - (HCFC-132b)	[Reserved]	4.2	0.05	0.00
C ₂ H ₂ F ₃ Cl- (HCFC-133a)	[Reserved]	4.8	0.03	0.00
C ₂ H ₃ FCl ₂ - (HCFC-141b)	0.12	7.8	0.10	0.00
C ₂ H ₃ F ₂ Cl- (HCFC-142b)	0.06	19.1	0.14	0.00
C ₃ HFCl ₂ - (HCFC-221)	[Reserved]			0.00
C ₃ HF ₂ Cl ₂ - (HCFC-222)	[Reserved]			0.00
C ₃ HF ₃ Cl ₂ - (HCFC-223)	[Reserved]			0.00
C ₃ HF ₄ Cl ₃ - (HCFC-224)	[Reserved]			0.00
C ₃ HF ₅ Cl ₂ - (HCFC-225ca)	[Reserved]	1.5	0.01	0.00
.....		–1.7		
(HCFC-225cb)	[Reserved]	5.1	0.04	0.00
C ₃ HF ₆ Cl- (HCFC-226)	[Reserved]			0.00
C ₃ H ₂ FCl ₅ - (HCFC-231)	[Reserved]			0.00
C ₃ H ₂ F ₂₄ - (HCFC-232)	[Reserved]			0.00
C ₃ H ₂ F ₃ Cl ₃ - (HCFC-233)	[Reserved]			0.00
C ₃ H ₂ F ₄ Cl ₂ - (HCFC-234)	[Reserved]			0.00
C ₃ H ₂ F ₅ Cl- (HCFC-235)	[Reserved]			0.00
C ₃ H ₃ FCl ₄ - (HCFC-241)	[Reserved]			0.00
C ₃ H ₃ F ₂ Cl ₃ - (HCFC-242)	[Reserved]			0.00
C ₃ H ₃ F ₃ Cl ₂ - (HCFC-243)	[Reserved]			0.00
C ₃ H ₃ F ₄ Cl- (HCFC-244)	[Reserved]			0.00
C ₃ H ₄ FCl ₃ - (HCFC-251)	[Reserved]			0.00
C ₃ H ₄ F ₂ Cl ₂ - (HCFC-252)	[Reserved]			0.00
C ₃ H ₄ F ₃ Cl- (HCFC-253)	[Reserved]			0.00
C ₃ H ₅ FCl ₂ - (HCFC-261)	[Reserved]			0.00
C ₂ H ₅ F ₂ Cl- (HCFC-262)	[Reserved]			0.00
C ₃ H ₆ FCl- (HCFC-271)	[Reserved]			0.00
All isomers of the above chemicals		[Reserved]		

[60 FR 24986, May 10, 1995, as amended at 68 FR 42894, July 18, 2003]

APPENDIX G TO SUBPART A OF PART 82—
UNEP RECOMMENDATIONS FOR CON-
DITIONS APPLIED TO EXEMPTION FOR
ESSENTIAL LABORATORY AND ANA-
LYTICAL USES

1. Essential laboratory and analytical uses are identified at this time to include equipment calibration; use as extraction solvents, diluents, or carriers for chemical analysis; biochemical research; inert solvents for chemical reactions, as a carrier or laboratory chemical and other critical analytical and laboratory purposes. Pursuant to Decision XI/15 of the Parties to the Montreal Protocol, effective January 1, 2002 the following

uses of class I controlled substances are not considered essential under the global laboratory exemption:

- Testing of oil and grease and total petroleum hydrocarbons in water;
- Testing of tar in road-paving materials; and

c. Forensic finger printing.

Production for essential laboratory and analytical purposes is authorized provided that these laboratory and analytical chemicals shall contain only controlled substances manufactured to the following purities:

CTC (reagent grade)—99.5
1,1,1-trichloroethane—99.5
CFC-11—99.5
CFC-13—99.5
CFC-12—99.5
CFC-113—99.5

Environmental Protection Agency

Pt. 82, Subpt. A, App. I

CFC-114—99.5

Other w/ Boiling P>20 degrees C—99.5

Other w/ Boiling P<20 degrees C—99.0

d. Testing of organic matter in coal.

2. These pure, controlled substances can be subsequently mixed by manufacturers, agents or distributors with other chemicals controlled or not controlled by the Montreal Protocol as is customary for laboratory and analytical uses.

3. These high purity substances and mixtures containing controlled substances shall be supplied only in re-closable containers or high pressure cylinders smaller than three litres or in 10 millilitre or smaller glass ampoules, marked clearly as substances that deplete the ozone layer, restricted to laboratory use and analytical purposes and specifying that used or surplus substances should be collected and recycled, if practical. The material should be destroyed if recycling is not practical.

4. Parties shall annually report for each controlled substance produced: the purity; the quantity; the application, specific test standard, or procedure requiring its uses; and the status of efforts to eliminate its use in each application. Parties shall also submit copies of published instructions, standards, specifications, and regulations requiring the use of the controlled substance.

5. Pursuant to Decision XVIII/15 of the Parties to the Montreal Protocol, methyl bromide is exempted for the following approved essential laboratory and analytical purposes

listed in following items (a) through (d). Use of methyl bromide for field trials is not an approved use under the global laboratory and analytical use exemption. The provisions of Appendix G, paragraphs (1), (2), (3), and (4), regarding purity, mixing, container, and reporting requirements for other exempt ODSS, also apply to the use of methyl bromide under this exemption.

a. Methyl bromide is exempted as an approved essential laboratory and analytical use as a reference or standard to calibrate equipment which uses methyl bromide, to monitor methyl bromide emission levels, or to determine methyl bromide residue levels in goods, plants and commodities;

b. Methyl bromide is exempted as an approved essential laboratory and analytical when used in laboratory toxicological studies;

c. Methyl bromide is exempted as an approved essential laboratory and analytical use to compare the efficacy of methyl bromide and its alternatives inside a laboratory; and

d. Methyl bromide is exempted as an approved essential laboratory and analytical use as a laboratory agent which is destroyed in a chemical reaction in the manner of feed-stock.

[60 FR 24986, May 10, 1995, as amended at 67 FR 6362, Feb. 11, 2002; 72 FR 73269, Dec. 27, 2007]

APPENDIX H TO SUBPART A OF PART 82—CLEAN AIR ACT AMENDMENTS OF 1990 PHASEOUT SCHEDULE FOR PRODUCTION OF OZONE-DEPLETING SUBSTANCES

Date	Carbon tetra-chloride (percent)	Methyl chloro-form (percent)	Other class sub-stances (percent)	Date	Carbon tetra-chloride (percent)	Methyl chloro-form (percent)	Other class sub-stances (percent)
1994	70	85	65	1998	15	50	15
1995	15	70	50	1999	15	50	15
1996	15	50	40	2000		20	
1997	15	50	15	2001		20	

APPENDIX I TO SUBPART A OF PART 82—GLOBAL WARMING POTENTIALS (MASS BASIS), REFERENCED TO THE ABSOLUTE GWP FOR THE ADOPTED CARBON CYCLE MODEL CO₂ DECAY RESPONSE AND FUTURE CO₂ ATMOSPHERIC CONCENTRATIONS HELD CONSTANT AT CURRENT LEVELS. (ONLY DIRECT EFFECTS ARE CONSIDERED.)

Species (chemical)	Chemical formula	Global warming potential (time horizon)		
		20 years	100 years	500 years
CFC-11	CFCl ₃	5000	4000	1400
CFC-12	CF ₂ Cl ₂	7900	8500	4200
CFC-13	CClF ₃	8100	11700	13600
CFC-113	C ₂ F ₃ Cl ₃	5000	5000	2300
CFC-114	C ₂ F ₄ Cl ₂	6900	9300	8300
CFC-115	C ₂ F ₅ Cl	6200	9300	13000
H-1301	CF ₃ Br	6200	5600	2200

Species (chemical)	Chemical formula	Global warming potential (time horizon)		
		20 years	100 years	500 years
Carbon Tet	CCl ₄	2000	1400	500
Methyl Chl	CH ₃ CCl ₃	360	110	35
HCFC-22	CF ₂ HCl	4300	1700	520
HCFC-141b	C ₂ FH ₃ Cl ₂	1800	630	200
HCFC-142b	C ₂ F ₂ H ₃ Cl	4200	2000	630
HCFC-123	C ₂ F ₃ HCl ₂	300	93	29
HCFC-124	C ₂ F ₄ HCl	1500	480	150
HCFC-225ca	C ₃ F ₅ HCl ₂	550	170	52
HCFC-225cb	C ₃ F ₅ HCl ₂	1700	530	170

AUnited Nations Environment Programme (UNEP), February 1995, Scientific Assessment of Ozone Depletion: 1994, Chapter 13, "Ozone Depleting Potentials, Global Warming Potentials and Future Chlorine/Bromine Loading," and do not reflect review of scientific documents published after that date.

[61 FR 1285, Jan. 19, 1996]

APPENDIX J TO SUBPART A OF PART 82—PARTIES TO THE MONTREAL PROTOCOL CLASSIED UNDER ARTICLE 5(1) THAT HAVE BANNED THE IMPORT OF CONTROLLED PRODUCTS THAT RELY ON CLASS I CONTROLLED SUBSTANCES FOR THEIR CONTINUING FUNCTIONING [RESERVED]

APPENDIX K TO SUBPART A OF PART 82—COMMODITY CODES FROM THE HARMONIZED TARIFF SCHEDULE FOR CONTROLLED SUBSTANCES AND USED CONTROLLED SUBSTANCES

Description of commodity or chemical	Commodity code from harmonized tariff schedule	Description of commodity or chemical	Commodity code from harmonized tariff schedule
<i>Class II:</i>		CFC-12 (Dichlorodifluoromethane)	2903.77.0050
HCFC-22 (Chlorodifluoromethane)	2903.71.0000	CFC-113 (Trichlorotrifluoroethane)	2903.77.0020
HCFC-123 (Dichlorotrifluoroethane)	2903.72.0020	CFC-114 (Dichlorotetrafluoroethane) ..	2903.77.0030
HCFC-124 (Monochlorotetrafluoroethane)	2903.79.1000	CFC-115 (Monochloropentafluoroethane)	2903.77.0040
HCFC-141b (Dichlorofluoroethane)	2903.73.0000	CFC-13, CFC-111, CFC-112, CFC-211, CFC-212, CFC-213, CFC-214, CFC-215, CFC-216, CFC-217, and other CFCs	2903.77.0080
HCFC-142b (Chlorodifluoroethane)	2903.74.0000	CFC Mixtures (R-500, R-502, etc.)	3824.71.0100
HCFC-225ca, HCFC-225cb (Dichloropentafluoropropanes)	2903.75.0000	Carbon Tetrachloride	2903.14.0000
HCFC-21, HCFC-31, HCFC-133, and other HCFCs	2903.79.9070	Halon 1301 (Bromotrifluoromethane)	2903.76.0010
HCFC Mixtures (R-401A, R-402A, etc.)	3824.74.0000	Halon, other	2903.76.0050
<i>Class I:</i>		Methyl Bromide	2903.39.1520
CFC-11 (Trichlorofluoromethane)	2903.77.0010	Methyl Chloroform	2903.19.6010

[85 FR 15299, Mar. 17, 2020]

APPENDIX L TO SUBPART A OF PART 82—APPROVED CRITICAL USES AND LIMITING CRITICAL CONDITIONS FOR THOSE USES

Column A	Column B	Column C
Approved Critical Uses.	Approved Critical User, Location of Use	Limiting Critical Conditions that exist, or that the approved critical user reasonably expects could arise without methyl bromide fumigation:
PRE-PLANT USES		
Strawberry Fruit	California growers in 2015 and 2016.	Moderate to severe black root rot or crown rot Moderate to severe yellow or purple nutsedge infestation

Environmental Protection Agency

§ 82.32

Column A	Column B	Column C
		Moderate to severe nematode infestation Local township limits prohibiting 1,3-dichloropropene
POST-HARVEST USES		
Dry Cured Pork Products.	Members of the National Country Ham Association and the American Association of Meat Processors, Nahunta Pork Center (North Carolina), and Gwaltney of Smithfield Inc..	Red legged ham beetle infestation Cheese/ham skipper infestation Dermestid beetle infestation Ham mite infestation

[80 FR 61992, Oct. 15, 2015]

Subpart B—Servicing of Motor Vehicle Air Conditioners

SOURCE: 57 FR 31261, July 14, 1992, unless otherwise noted.

§ 82.30 Purpose and scope.

(a) The purpose of the regulations in this subpart B is to implement section 609 of the Clean Air Act, as amended (Act) regarding the servicing of motor vehicle air conditioners (MVACs), and to implement section 608 of the Act regarding certain servicing, maintenance, repair and disposal of air conditioners in MVACs and MVAC-like appliances (as that term is defined in 40 CFR 82.152).

(b) These regulations apply to any person performing service on a motor vehicle for consideration when this service involves the refrigerant in the motor vehicle air conditioner.

[57 FR 31261, July 14, 1992, as amended at 62 FR 68046, Dec. 30, 1997]

§ 82.31 Incorporation by reference.

(a) Certain material is incorporated by reference into this subpart part with the approval of the Director of the Federal Register under 5 U.S.C. 552(a) and 1 CFR part 51. You can obtain the material from the sources listed in paragraph (b) of this section. You may inspect a copy of the approved material at U.S. EPA's Air and Radiation Docket; EPA West Building, Room 3334, 1301 Constitution Ave. NW, Washington, DC, or at the National Archives and Records Administration (NARA). For information on the availability of this material at NARA, email fedreg.legal@nara.gov or go to

www.archives.gov/federal-register/cfr/ibr-locations.html.

(b) SAE International. SAE Customer Service, 400 Commonwealth Drive, Warrendale, PA 15096-0001 USA; Email: CustomerService@sae.org; Telephone: 1-877-606-7323 (U.S. and Canada only) or 1-724-776-4970 (outside the U.S. and Canada); internet address: <http://store.sae.org/dlabout.htm>.

(1) SAE J2843™, R-1234yf (HFO-1234yf) Recovery/Recycling/Recharging Equipment for Flammable Refrigerants for Mobile Air-Conditioning Systems. Revised July 2019; IBR approved for § 82.36(a).

(2) SAE J2851. Recovery Equipment for Contaminated R-134a or R-1234yf Refrigerant from Mobile Automotive Air Conditioning Systems. Revised February 2015; IBR approved for § 82.36(a).

(3) SAE J3030. Automotive Refrigerant Recovery/Recycling/Recharging Equipment Intended for use with Both R-1234yf and R-134a. Issued July 2015 (*Note:* SAE J3030 heading says "revised"); IBR approved for § 82.36(a).

[86 FR 15595, Mar. 24, 2021]

§ 82.32 Definitions.

(a) *Approved independent standards testing organization* means any organization which has applied for and received approval from the Administrator pursuant to § 82.38.

(b) *Approved refrigerant recycling equipment* means equipment certified by the Administrator or an organization approved under § 82.38 as meeting either one of the standards in § 82.36. Such equipment extracts and recycles refrigerant or extracts refrigerant for recycling on-site or reclamation off-site.

(c) *Motor vehicle* as used in this subpart means any vehicle which is self-propelled and designed for transporting persons or property on a street or highway, including but not limited to passenger cars, light duty vehicles, and heavy duty vehicles. This definition does not include a vehicle where final assembly of the vehicle has not been completed by the original equipment manufacturer.

(d) *Motor vehicle air conditioners* means mechanical vapor compression refrigeration equipment used to cool the driver's or passenger's compartment of any motor vehicle. This definition is not intended to encompass the hermetically sealed refrigeration systems used on motor vehicles for refrigerated cargo and the air conditioning systems on passenger buses using HCFC-22 refrigerant.

(e) *Properly using.* (1) Properly using means using equipment in conformity with the regulations set forth in this subpart, including but not limited to the prohibitions and required practices set forth in § 82.34, and the recommended service procedures and practices for the containment of refrigerant set forth in § 82.36(a) and appendices A, B, C, D, E, and F to this subpart, as applicable. In addition, this term includes operating the equipment in accordance with the manufacturer's guide to operation and maintenance and using the equipment only for the controlled substance for which the machine is designed. For equipment that extracts and recycles refrigerant, properly using also means to recycle refrigerant before it is returned to a motor vehicle air conditioner or MVAC-like appliance, including to the motor vehicle air conditioner or MVAC-like appliance from which the refrigerant was extracted. For equipment that only recovers refrigerant, properly using includes the requirement to recycle the refrigerant on-site or send the refrigerant off-site for reclamation.

(2) Refrigerant from reclamation facilities that is used for the purpose of recharging motor vehicle air conditioners must be at or above the standard of purity developed by the Air-conditioning and Refrigeration Institute (ARI 700-93) (which is codified at 40 CFR part 82, subpart F, appendix A,

and is available at 4301 North Fairfax Drive, Suite 425, Arlington, Virginia 22203). Refrigerant may be recycled off-site only if the refrigerant is extracted using recover only equipment, and is subsequently recycled off-site by equipment owned by the person that owns both the recover only equipment and owns or operates the establishment at which the refrigerant was extracted. In any event, approved equipment must be used to extract refrigerant prior to performing any service during which discharge of refrigerant from the motor vehicle air conditioner can reasonably be expected. Intentionally venting or disposing of refrigerant to the atmosphere is an improper use of equipment.

(3) Notwithstanding any other terms of this paragraph (e), approved refrigerant recycling equipment may be transported off-site and used to perform service involving refrigerant at other locations where such servicing occurs. Any such servicing involving refrigerant must meet all of the requirements of this subpart B that would apply if the servicing occurred on-site.

(4) Facilities that charge MVACs or MVAC-like appliances with refrigerant but do not perform any other service involving refrigerant (*i.e.*, perform "top-offs" only) are considered to be engaged in "service involving refrigerant" and are therefore subject to any and all requirements of this subsection that apply to facilities that perform a wider range of refrigerant servicing. For facilities that charge MVACs, this includes the requirement to purchase approved refrigerant recycling equipment. For facilities that only charge MVAC-like appliances, this does not include the requirement to purchase approved refrigerant recycling equipment, but does include the requirement to be properly trained and certified by a technician certification program approved by the Administrator pursuant to either § 82.40 or § 82.161(a)(5).

(5) All persons opening (as that term is defined in § 82.152) MVAC-like appliances must have at least one piece of approved recovery or recycling equipment available at their place of business.

(f) *Refrigerant* means any class I or class II substance used in a motor vehicle air conditioner. Class I and class II substances are listed in part 82, subpart A, appendix A. Effective November 15, 1995, refrigerant shall also include any substitute substance.

(g) *Service for consideration* means being paid to perform service, whether it is in cash, credit, goods, or services. This includes all service except that done for free.

(h) *Service involving refrigerant* means any service during which discharge or release of refrigerant from the MVAC or MVAC-like appliance to the atmosphere can reasonably be expected to occur. Service involving refrigerant includes any service in which an MVAC or MVAC-like appliance is charged with refrigerant but no other service involving refrigerant is performed (*i.e.*, a “top-off”).

(i) *Motor vehicle disposal facility* means any commercial facility that engages in the disposal (which includes dismantling, crushing or recycling) of MVACs or MVAC-like appliances, including but not limited to automotive recycling facilities, scrap yards, landfills and salvage yards engaged in such operations. Motor vehicle repair and/or servicing facilities, including collision repair facilities, are not considered motor vehicle disposal facilities.

[57 FR 31261, July 14, 1992, as amended at 60 FR 21687, May 2, 1995; 62 FR 68046, Dec. 30, 1997; 86 FR 15595, Mar. 24, 2021]

§ 82.34 Prohibitions and required practices.

(a) No person repairing or servicing MVACs for consideration, and no person repairing or servicing MVAC-like appliances, may perform any service involving the refrigerant for such MVAC or MVAC-like appliance:

(1) Without properly using equipment approved pursuant to § 82.36;

(2) Unless any such person repairing or servicing an MVAC has been properly trained and certified by a technician certification program approved by the Administrator pursuant to § 82.40; and

(3) Unless any such person repairing or servicing an MVAC-like appliance has been properly trained and certified by a technician certification program

approved by the Administrator pursuant to either § 82.40 or § 82.161(a)(5).

(b) Effective November 15, 1992, no person may sell or distribute, or offer for sale or distribution, any class I or class II substance that is suitable for use as a refrigerant in motor vehicle air-conditioner and that is in a container which contains less than 20 pounds of such refrigerant to any person unless that person is properly trained and certified under § 82.40 or intended the containers for resale only, and so certifies to the seller under § 82.42(b)(3).

(c) No technician training programs may issue certificates unless the program complies with all of the standards in § 82.40(a).

(d) *Motor vehicle disposal facilities.* (1) Any refrigerant that is extracted from an MVAC or an MVAC-like appliance (as that term is defined in § 82.152) bound for disposal and located at a motor vehicle disposal facility may not be subsequently used to charge or recharge an MVAC or MVAC-like appliance, unless, prior to such charging or recharging, the refrigerant is either:

(i) Recovered, and reclaimed in accordance with the regulations promulgated under § 82.32(e)(2) of this subpart B; or

(ii) (A) Recovered using approved refrigerant recycling equipment dedicated for use with MVACs and MVAC-like appliances, either by a technician certified under paragraph (a)(2) of this section, or by an employee, owner, or operator of, or contractor to, the disposal facility; and

(B) Subsequently recycled by the facility that charges or recharges the refrigerant into an MVAC or MVAC-like appliance, properly using approved refrigerant recycling equipment in accordance with any applicable recommended service procedures set forth in the appendices to this subpart B.

(2) Any refrigerant the sale of which is restricted under subpart F that is extracted from an MVAC or an MVAC-like appliance bound for disposal and located at a motor vehicle disposal facility but not subsequently reclaimed in accordance with the regulations promulgated under subpart F, may be sold prior to its subsequent re-use only to a technician certified under paragraph

§ 82.36

40 CFR Ch. I (7–1–24 Edition)

(a)(2) of this section. Any technician certified under paragraph (a)(2) of this section who obtains such a refrigerant may subsequently re-use such refrigerant only in an MVAC or MVAC-like appliance, and only if it has been reclaimed or properly recycled.

(e) Refrigerant handling equipment manufactured or imported for use during the maintenance, service or repair of MVACs for consideration cannot be introduced into interstate commerce unless meeting the requirements of § 82.36.

[57 FR 31261, July 14, 1992, as amended at 62 FR 68047, Dec. 30, 1997; 72 FR 63494, Nov. 9, 2007]

§ 82.36 Approved refrigerant handling equipment.

(a)(1) Refrigerant recycling equipment must be certified by the Administrator or an independent standards testing organization approved by the Administrator under § 82.38 to meet the following standard:

(2) Equipment that recovers and recycles CFC-12 refrigerant must meet the standards set forth in appendix A of this subpart (Recommended Service Procedure for the Containment of CFC-12, Extraction and Recycle Equipment for Mobile Automotive Air-Conditioning Systems, and Standard of Purity for Use in Mobile Air Conditioning Systems).

(3) Equipment that recovers but does not recycle CFC-12 refrigerant must meet the standards set forth in appendix B of this subpart (Recommended Service Procedure for the Containment of CFC-12 and Extraction Equipment for Mobile Automotive Air-Conditioning Systems).

(4) Effective January 1, 2008, equipment that recovers and recycles HFC-134a refrigerant and equipment that recovers and recycles HFC-134a refrigerant and recharges systems with HFC-134a refrigerant must meet the standards set forth in Appendix C of this subpart based upon J2788—HFC-134a (R-134a) Recovery/Recycling Equipment and Recovery/Recycling/Recharging for Mobile Air-Conditioning Systems.

(5) Effective October 31, 2008, equipment that recovers but does not recycle HFC-134a refrigerant must meet the

standards set forth in Appendix D of this subpart based upon J2810—HFC-134a (R-134a) Recovery Equipment Mobile Air-Conditioning Systems.

(6) Equipment that recovers and recycles both CFC-12 and HFC-134a using common circuitry must meet the standards set forth in appendix E of this subpart (Automotive Refrigerant Recycling Equipment Intended for Use with both CFC-12 and HFC-134a, Recommended Service Procedure for the Containment of CFC-12, and Recommended Service Procedure for the Containment of HFC-134a).

(7) Equipment that recovers but does not recycle refrigerants other than CFC-12, HFC-134a, and HFO-1234yf must meet the standards set forth in appendix F of this subpart (Recover-Only Equipment that Extracts a Single, Specific Refrigerant Other Than CFC-12, HFC-134a, or HFO-1234yf).

(8) Equipment that recovers and recycles HFO-1234yf refrigerant from MVACs and recharges MVAC systems with HFO-1234yf refrigerant must meet the standards set forth in SAE J2843 (incorporated by reference, see § 82.31).

(9) Equipment that recovers but does not recycle contaminated HFC-134a and/or HFO-1234yf refrigerant from MVACs must meet the standards set forth in SAE J2851 (incorporated by reference, see § 82.31).

(10) Equipment that recovers, recycles, and recharges both HFO-1234yf and R-134a from MVACs must meet the standards set forth in SAE J3030 (incorporated by reference, see § 82.31).

(b)(1) Refrigerant recycling equipment that has not been certified under paragraph (a) of this section shall be considered approved if it is substantially identical to the applicable equipment certified under paragraph (a) of this section, and:

(i) For equipment that recovers and recycles CFC-12 refrigerant, it was initially purchased before September 4, 1991;

(ii) For equipment that recovers but does not recycle CFC-12 refrigerant, it was initially purchased before April 22, 1992;

(iii) For equipment that recovers and recycles HFC-134a refrigerant, it was initially purchased before March 6, 1996;

Environmental Protection Agency

§ 82.38

(iv) For equipment that recovers but does not recycle HFC-134a refrigerant, it was initially purchased before March 6, 1996;

(v) For equipment that recovers but does not recycle any single, specific refrigerant other than CFC-12 or HFC-134a, it was initially purchased before March 6, 1996; and

(vi) For equipment that recovers and recycles HFC-134a and CFC-12 refrigerant using common circuitry, it was initially purchased before March 6, 1996.

(2) Equipment manufacturers or owners may request a determination by the Administrator by submitting an application and supporting documents that indicate that the equipment is substantially identical to approved equipment to: MVACs Recycling Program Manager, Stratospheric Protection Division (6205J), U.S. Environmental Protection Agency, 1200 Pennsylvania Ave., NW., Washington, DC 20460, Attn: Substantially Identical Equipment Review. Supporting documents must include process flow sheets, lists of components and any other information that would indicate that the equipment is capable of processing the refrigerant to the standards in appendix A, B, C, D, E or F of this subpart, as applicable. Authorized representatives of the Administrator may inspect equipment for which approval is being sought and request samples of refrigerant that has been extracted and/or recycled using the equipment. Equipment that fails to meet appropriate standards will not be considered approved.

(3) Refrigerant recycling equipment that recovers or recovers and recycles CFC-12 refrigerant and has not been certified under paragraph (a) or approved under paragraphs(b)(1) and (b)(2) of this section shall be considered approved for use with an MVAC-like appliance if it was manufactured or imported before November 15, 1993, and is capable of reducing the system pressure to 102 mm of mercury vacuum under the conditions set forth in appendix A of this subpart.

(c) The Administrator will maintain a list of approved equipment by manufacturer and model. Persons interested in obtaining a copy of the list should

send written inquiries to the address in paragraph (b) of this section.

[57 FR 31261, July 14, 1992, as amended at 60 FR 21687, May 2, 1995; 62 FR 68047, Dec. 30, 1997; 72 FR 63494, Nov. 9, 2007; 73 FR 34647, June 18, 2008; 86 FR 15595, Mar. 24, 2021]

§ 82.38 Approved independent standards testing organizations.

(a) Any independent standards testing organization may apply for approval by the Administrator to certify equipment as meeting the standards in § 82.36(a) and appendices A, B, C, D, E, and F to this subpart, as applicable. The application shall be sent to: MVACs Recycling Program Manager, Stratospheric Protection Division (6205T), U.S. Environmental Protection Agency, 1200 Pennsylvania Ave. NW, Washington, DC 20460.

(b) Applications for approval must document the following:

(1) That the organization has the capacity to accurately test whether refrigerant recycling equipment complies with the applicable standards. In particular, applications must document:

(i) The equipment present at the organization that will be used for equipment testing;

(ii) The expertise in equipment testing and the technical experience of the organization's personnel;

(iii) Thorough knowledge of the standards as they appear in the applicable appendices of this subpart; and

(iv) The test procedures to be used to test equipment for compliance with applicable standards, and why such test procedures are appropriate for that purpose.

(2) That the organization has no conflict of interest and will receive no financial benefit based on the outcome of certification testing; and

(3) That the organization agrees to allow the Administrator access to verify the information contained in the application.

(c) If approval is denied under this section, the Administrator shall give written notice to the organization setting forth the basis for his or her determination.

(d) If at any time an approved independent standards testing organization is found to be conducting certification tests for the purposes of this subpart in

§ 82.40

40 CFR Ch. I (7–1–24 Edition)

a manner not consistent with the representations made in its application for approval under this section, the Administrator reserves the right to revoke approval.

[57 FR 31261, July 14, 1992, as amended at 60 FR 21687, May 2, 1995; 62 FR 68048, Dec. 30, 1997; 86 FR 15595, Mar. 24, 2021]

§ 82.40 Technician training and certification.

(a) Any technician training and certification program may apply for approval, in accordance with the provisions of this paragraph, by submitting to the Administrator at the address in § 82.38(a) verification that the program meets all of the following standards:

(1) *Training.* Each program must provide adequate training, through one or more of the following means: on-the-job training, training through self-study of instructional material, or on-site training involving instructors, videos or a hands-on demonstration.

(2) *Test subject material.* The certification tests must adequately and sufficiently cover the following:

(i) The standards established for the service and repair of MVACs and MVAC-like appliances as set forth in § 82.36(a) and appendices A, B, C, D, E, and F to this subpart. These standards relate to the recommended service procedures for the containment of refrigerant, extraction equipment, extraction and recycle equipment, and the standard of purity for refrigerant in motor vehicle air conditioners.

(ii) Anticipated future technological developments, such as the introduction of HFC-134a in new motor vehicle air conditioners.

(iii) The environmental consequences of refrigerant release and the adverse effects of stratospheric ozone layer depletion.

(iv) As of August 13, 1992, the requirements imposed by the Administrator under section 609 of the Act.

(3) *Test administration.* Completed tests must be graded by an entity or individual who receives no benefit based on the outcome of testing; a fee may be charged for grading. Sufficient measures must be taken at the test site to ensure that tests are completed honestly by each technician. Each test must provide a means of verifying the

identification of the individual taking the test. Programs are encouraged to make provisions for non-English speaking technicians by providing tests in other languages or allowing the use of a translator when taking the test. If a translator is used, the certificate received must indicate that translator assistance was required.

(4) *Proof of certification.* Each certification program must offer individual proof of certification, such as a certificate, wallet-sized card, or display card, upon successful completion of the test. Each certification program must provide a unique number for each certified technician.

(b) In deciding whether to approve an application, the Administrator will consider the extent to which the applicant has documented that its program meets the standards set forth in this section. The Administrator reserves the right to consider other factors deemed relevant to ensure the effectiveness of certification programs. The Administrator may approve a program which meets all of the standards in paragraph (a) of this section except test administration if the program, when viewed as a whole, is at least as effective as a program that does meet all the standards. Such approval shall be limited to training and certification conducted before August 13, 1992. If approval is denied under this section, the Administrator shall give written notice to the program setting forth the basis for his determination.

(c) *Technical revisions.* Directors of approved certification programs must conduct periodic reviews of test subject material and update the material based upon the latest technological developments in motor vehicle air conditioner service and repair. A written summary of the review and any changes made must be submitted to the Administrator every two years.

(d) *Recertification.* The Administrator reserves the right to specify the need for technician recertification at some future date, if necessary.

(e) If at any time an approved program is conducted in a manner not consistent with the representations made in the application for approval of

Environmental Protection Agency

§ 82.42

the program under this section, the Administrator reserves the right to revoke approval.

(f) Authorized representatives of the Administrator may require technicians to demonstrate on the business entity's premises their ability to perform proper procedures for recovering and/or recycling refrigerant. Failure to demonstrate or failure to properly use the equipment may result in revocation of the technician's certificate by the Administrator. Technicians whose certification is revoked must be recertified before servicing or repairing any motor vehicle air conditioners.

[57 FR 31261, July 14, 1992, as amended at 60 FR 21688, May 2, 1995; 62 FR 68048, Dec. 30, 1997; 86 FR 15595, Mar. 24, 2021]

§ 82.42 Certification, recordkeeping and public notification requirements.

(a) *Certification requirements.* (1) No later than January 1, 1993, any person repairing or servicing motor vehicle air conditioners for consideration shall certify to the Administrator that such person has acquired, and is properly using, approved equipment and that each individual authorized to use the equipment is properly trained and certified. Certification shall take the form of a statement signed by the owner of the equipment or another responsible officer and setting forth:

(i) The name of the purchaser of the equipment;

(ii) The address of the establishment where the equipment will be located; and

(iii) The manufacturer name and equipment model number, the date of manufacture, and the serial number of the equipment. The certification must also include a statement that the equipment will be properly used in servicing motor vehicle air conditioners, that each individual authorized by the purchaser to perform service is properly trained and certified in accordance with § 82.40, and that the information given is true and correct.

(A) Owners or lessees of recycling or recovery equipment having their places of business in Connecticut, Maine, Massachusetts, New Hampshire, Rhode Island, and Vermont must send their certifications to: CAA section 609 Enforcement

Contact; EPA Region I; Mail Code 04-2; 5 Post Office Square—Suite 100, Boston, MA 02109-3912.

(B) Owners or lessees of recycling or recovery equipment having their places of business in New York, New Jersey, Puerto Rico, Virgin Islands must send their certifications to: CAA section 609 Enforcement Contact; EPA Region II (2DECA-AC); 290 Broadway, 21st Floor; New York, NY 10007-1866.

(C) Owners or lessees of recycling or recovery equipment having their places of business in Delaware, District of Columbia, Maryland, Pennsylvania, Virginia, West Virginia must send their certifications to: CAA section 609 Enforcement Contact; EPA Region III—Wheeling Operations Office; Mail Code 3AP12; 303 Methodist Building; 11th and Chapline Streets; Wheeling, WV 26003.

(D) Owners or lessees of recycling or recovery equipment having their places of business in Alabama, Florida, Georgia, Kentucky, Mississippi, North Carolina, South Carolina, Tennessee must send their certifications to: CAA section 609 Enforcement Contact; EPA Region IV (APT-AE); Atlanta Federal Center; 61 Forsyth Street, SW.; Atlanta, GA 30303.

(E) Owners or lessees of recycling or recovery equipment having their places of business in Illinois, Indiana, Michigan, Minnesota, Ohio, Wisconsin must send their certifications to: CAA section 609 Enforcement Contact, EPA Region V (AE17J); 77 West Jackson Blvd.; Chicago, IL 60604-3507.

(F) Owners or lessees of recycling or recovery equipment having their places of business in Arkansas, Louisiana, New Mexico, Oklahoma, Texas must send their certifications to: CAA Section 609 Enforcement Contact, EPA Region 6, 1201 Elm Street, Suite 500, Mail Code 6ECDAP, Dallas, Texas 75270-2102.

(G) Owners or lessees of recycling or recovery equipment having their places of business in Iowa, Kansas, Missouri, Nebraska must send their certifications to: CAA section 609 Enforcement Contact; EPA Region 7; Mail Code APCO/APDB/ACES; 11201 Renner Boulevard, Lenexa, Kansas 66219.

(H) Owners or lessees of recycling or recovery equipment having their places of business in Colorado, Montana, North Dakota, South Dakota, Utah,

Wyoming must send their certifications to: CAA section 609 Enforcement Contact, EPA Region VIII, Mail Code 8ENF-T, 999 18th Street, Suite 500, Denver, CO 80202-2466.

(I) Owners or lessees of recycling or recovery equipment having their places of business in American Samoa, Arizona, California, Guam, Hawaii, Nevada must send their certifications to: CAA section 609 Enforcement Contact; EPA Region IX; Mail Code AIR-5; 75 Hawthorne Street; San Francisco, CA 94105.

(J) Owners or lessees of recycling or recovery equipment having their places of business in Alaska, Idaho, Oregon, Washington must send their certifications to: CAA section 609 Enforcement Contact; EPA Region X (OAQ-107); 1200 Sixth Avenue; Seattle, WA 98101.

(b) *Recordkeeping requirements.* (1) Any person who owns approved refrigerant recycling equipment certified under §82.36(a)(2) must maintain records of the name and address of any facility to which refrigerant is sent.

(2) Any person who owns approved refrigerant recycling equipment must retain records demonstrating that all persons authorized to operate the equipment are currently certified under §82.40.

(3) Any person who sells or distributes any class I or class II substance that is suitable for use as a refrigerant in a motor vehicle air conditioner and that is in a container of less than 20 pounds of such refrigerant must verify that the purchaser is properly trained and certified under §82.40. The seller must have a reasonable basis for believing that the information presented by the purchaser is accurate. The only exception to these requirements is if the purchaser is purchasing the small containers for resale only. In this case, the seller must obtain a written statement from the purchaser that the containers are for resale only and indicate the purchaser's name and business address. Records required under this paragraph must be retained for a period of three years.

(4) All records required to be maintained pursuant to this section must be kept for a minimum of three years unless otherwise indicated. Entities

which service motor vehicle air conditioners for consideration must keep these records on-site.

(5) All entities which service motor vehicle air conditioners for consideration must allow an authorized representative of the Administrator entry onto their premises (upon presentation of his or her credentials) and give the authorized representative access to all records required to be maintained pursuant to this section.

(c) *Public notification.* Any person who conducts any retail sales of a class I or class II substance that is suitable for use as a refrigerant in a motor vehicle air conditioner, and that is in a container of less than 20 pounds of refrigerant, must prominently display a sign where sales of such containers occur which states:

“It is a violation of federal law to sell containers of Class I and Class II refrigerant of less than 20 pounds of such refrigerant to anyone who is not properly trained and certified to operate approved refrigerant recycling equipment.”

[57 FR 31261, July 14, 1992, as amended at 60 FR 21688, May 2, 1995; 72 FR 63494, Nov. 9, 2007; 76 FR 49673, Aug. 11, 2011; 78 FR 37977, June 25, 2013; 84 FR 34070, July 17, 2019; 84 FR 44230, Aug. 23, 2019]

APPENDIX A TO SUBPART B OF PART 82— STANDARD FOR RECYCLE/RECOVER EQUIPMENT

STANDARD OF PURITY FOR USE IN MOBILE AIR- CONDITIONING SYSTEMS

Foreword

Due to the CFC's damaging effect on the ozone layer, recycle of CFC-12 (R-12) used in mobile air-conditioning systems is required to reduce system venting during normal service operations. Establishing recycle specifications for R-12 will assure that system operation with recycled R-12 will provide the same level of performance as new refrigerant.

Extensive field testing with the EPA and the auto industry indicate that reuse of R-12 removed from mobile air-conditioning systems can be considered, if the refrigerant is cleaned to a specific standard. The purpose of this standard is to establish the specific minimum levels of R-12 purity required for recycled R-12 removed from mobile automotive air-conditioning systems.

Environmental Protection Agency

Pt. 82, Subpt. B, App. A

1. Scope

This information applies to refrigerant used to service automobiles, light trucks, and other vehicles with similar CFC-12 systems. Systems used on mobile vehicles for refrigerated cargo that have hermetically sealed, rigid pipe are not covered in this document.

2. References

SAE J1989, Recommended Service Procedure for the Containment of R-12
SAE J1990, Extraction and Recycle Equipment for Mobile Automotive Air-Conditioning Systems
ARI Standard 700-88

3. Purity Specification

The refrigerant in this document shall have been directly removed from, and intended to be returned to, a mobile air-conditioning system. The contaminants in this recycled refrigerant 12 shall be limited to moisture, refrigerant oil, and noncondensable gases, which shall not exceed the following level:

- 3.1 *Moisture*: 15 ppm by weight.
- 3.2 *Refrigerant Oil*: 4000 ppm by weight.
- 3.3 *Noncondensable Gases (air)*: 330 ppm by weight.

4. Refrigeration Recycle Equipment Used in Direct Mobile Air-Conditioning Service Operations Requirement

4.1 The equipment shall meet SAE J1990, which covers additional moisture, acid, and filter requirements.

4.2 The equipment shall have a label indicating that it is certified to meet this document.

5. Purity Specification of Recycled R-12 Refrigerant Supplied in Containers From Other Recycle Sources

Purity specification of recycled R-12 refrigerant supplied in containers from other recycle sources, for service of mobile air-conditioning systems, shall meet ARI Standard 700-88 (Air Conditioning and Refrigeration Institute).

6. Operation of the Recycle Equipment

This shall be done in accordance with SAE J1989.

Rationale

Not applicable.

Relationship of SAE Standard to ISO Standard

Not applicable.

Reference Section

SAE J1989, Recommended Service Procedure for the Containment of R-12

SAE J1990, Extraction and Recycle Equipment for Mobile Automotive Air-Conditioning Systems
ARI Standard 700-88

Application

This information applies to refrigerant used to service automobiles, light trucks, and other vehicles with similar CFC-12 systems. Systems used on mobile vehicles for refrigerated cargo that have hermetically sealed, rigid pipe are not covered in this document.

Committee Composition

DEVELOPED BY THE SAE DEFROST AND INTERIOR CLIMATE CONTROLS STANDARDS COMMITTEE

W.J. Atkinson, Sun Test Engineering, Paradise Valley, AZ—Chairman
J.J. Amin, Union Lake, MI
H.S. Andersson, Saab Scania, Sweden
P.E. Anglin, ITT Highbie Mfg. Co., Rochester, MI
R.W. Bishop, GMC, Lockport, NY
D. Hawks, General Motors Corporation, Pontiac, MI
J.J. Hernandez, NAVISTAR, Ft. Wayne, IN
H. Kaltner, Volkswagen AG, Germany, Federal Republic
D.F. Last, GMC, Troy, MI
D.E. Linn, Volkswagen of America, Warren, MI
J.H. McCorkel, Freightliner Corp., Charlotte, NC
C.J. McLachlan, Livonia, MI
H.L. Miner, Climate Control Inc., Decatur, IL
R.J. Niemiec, General Motors Corp., Pontiac, MI
N. Novak, Chrysler Corp., Detroit, MI
S. Oulouhojian, Mobile Air Conditioning Society, Upper Darby, PA
J. Phillips, Air International, Australia
R.H. Proctor, Murray Corp., Cockeysville, MD
G. Rolling, Behr America Inc., Ft. Worth, TX
C.D. Sweet, Signet Systems Inc., Harrodsburg, KY
J.P. Telesz, General Motors Corp., Lockport, NY

EXTRACTION AND RECYCLE EQUIPMENT FOR MOBILE AUTOMOTIVE AIR CONDITIONING SYSTEMS

SAE Recommended Practice, SAE J1990
(1991)¹

0. Foreword

Due to the CFC's damaging effect on the ozone layer, recycle of CFC-12 (R-12) used in

¹This standard is appropriate for equipment certified after February 1, 1992. This

Continued

mobile air-conditioning systems is required to replace system venting during normal service operations. Establishing recycle specifications for R-12 will provide the same level of performance as new refrigerant.

Extensive field testing with the EPA and the auto industry indicates that R-12 can be reused, provided that it is cleaned to specifications in SAE J1991. The purpose of this document is to establish the specific minimum equipment specification required for recycle of R-12 that has been directly removed from mobile systems for reuse in mobile automotive air-conditioning systems.

1. Scope

The purpose of this document is to provide equipment specifications for CFC-12 (R-12) recycling equipment. This information applies to equipment used to service automobiles, light trucks, and other vehicles with similar CFC-12 air-conditioning systems. Systems used on mobile vehicles for refrigerated cargo that have hermetically sealed systems are not covered in this document. The equipment in this document is intended for use with refrigerant that has been directly removed from, and intended to be returned to, a mobile air-conditioning system. Should other revisions due to operational or technical requirements occur, this document may be amended.

2. References

2.1 Applicable Documents:

2.1.1 SAE Publications—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J1991—Standard of Purity for Use in Mobile Air-Conditioning Systems

SAE J2196—Service Hose for Automotive Air-Conditioning

2.1.2 CGA Publications—Available from CGA, Crystal Gateway #1, Ste. 501, 1235 Jefferson Davis Hwy., Arlington, VA 22202

CGA Pamphlet S-1.1—Pressure Relief Device Standard Part 1—Cylinders for Compressed Gases

3. Specification and General Description

3.1 The equipment must be able to extract and process CFC-12 from mobile air-conditioning systems. The equipment shall process the contaminated R-12 samples as de-

equipment may be marked design certified for compliance with SAE J1990 (1991). The standard for approval for equipment certified on or before February 1, 1992 is SAE J1990 (1989). This equipment may be marked design certified for compliance with SAE J1990 (1989). Both types of equipment are considered approved under the requirements of this regulation.

finied in 8.4 and shall clean the refrigerant to the level as defined in SAE J1991.

3.2 The equipment shall be suitable for use in an automotive service environment and be capable of continuous operation in ambients from 10 to 49 °C.

3.3 The equipment must be certified by Underwriters Laboratories or an equivalent certifying laboratory.

3.4 The equipment shall have a label "Design Certified by (Company Name) to Meet SAE J1991". The minimum letter size shall be bold type 3 mm in height.

4. Refrigeration Recycle Equipment Requirements

4.1 Moisture and Acid—The equipment shall incorporate a desiccant package that must be replaced before saturated with moisture and whose mineral acid capacity is at least 5% by weight of total system dry desiccant.

4.1.1 The equipment shall be provided with a moisture detection device that will reliably indicate when moisture in the CFC-12 exceeds the allowable level and requires the filter/dryer replacement.

4.2 Filter—The equipment shall incorporate an in-line filter that will trap particulates of 15 µm or greater.

4.3 Noncondensable Gas.

4.3.1 The equipment shall either automatically purge noncondensables (NCGs) if the acceptable level is exceeded or incorporate a device to alert the operator that NCG level has been exceeded. NCG removal must be part of normal operation of the equipment and instructions must be provided to enable the task to be accomplished within 30 minutes.

4.3.2 Refrigerant loss from noncondensable gas purging during testing described in Section 8 shall not exceed five percent (5%) by weight of the total contaminated refrigerant removed from the test system.

4.3.3 Transfer of Recycled Refrigerant—Recycled refrigerant for recharging and transfer shall be taken from the liquid phase only.

5. Safety Requirements

5.1 The equipment must comply with applicable federal, state and local requirements on equipment related to the handling of R-12 material. Safety precautions or notices related to the safe operation of the equipment shall be prominently displayed on the equipment and should also state "Caution—Should Be Operated By Qualified Personnel".

6. Operating Instructions

6.1 The equipment manufacturer must provide operating instructions, necessary maintenance procedures, and source information for replacement parts and repair.

Environmental Protection Agency

Pt. 82, Subpt. B, App. A

6.2 The equipment must prominently display the manufacturer's name, address and any items that require maintenance or replacement that affect the proper operation of the equipment. Operation manuals must cover information for complete maintenance of the equipment to assure proper operation.

7. Functional Description

7.1 The equipment must be capable of ensuring recovery of the R-12 from the system being service, by reducing the system pressure below atmospheric to a minimum of 102 mm of mercury.

7.2 To prevent overcharge, the equipment must be equipped to protect the tank used to store the recycled refrigerant with a shutoff device and a mechanical pressure relief valve.

7.3 Portable refillable tanks or containers used in conjunction with this equipment must meet applicable Department of Transportation (DOT) or Underwriters Laboratories (UL) Standards and be adaptable to existing refrigerant service and charging equipment.

7.4 During operation, the equipment shall provide overfill protection to assure the storage container, internal or external, liquid fill does not exceed 80% of the tank's rated volume at 21.1 °C (70 °F) per DOT standards, CFR title 49, §173.304 and American Society of Mechanical Engineers.

7.4.1 Additional Storage Tank Requirements.

7.4.1.1 The cylinder valve shall comply with the standard for cylinder valves, UL 1769.

7.4.1.2 The pressure relief device shall comply with the Pressure Relief Device Standard Part 1—Cylinders for Compressed Gases, CGA Pamphlet S-1.1.

7.4.1.3 The tank assembly shall be marked to indicate the first retest date, which shall be 5 years after date of manufacture. The marking shall indicate that retest must be performed every subsequent 5 years. The marking shall be in letters at least ¼ in high.

7.5 All flexible hoses must meet SAE J2196 hose specification effective January 1, 1992.

7.6 Service hoses must have shutoff devices located within 30 cm (12 in) of the connection point to the system being serviced to minimize introduction of noncondensable gases into the recovery equipment and the release of the refrigerant when being disconnected.

7.7 The equipment must be able to separate the lubricant from the recovered refrigerant and accurately indicate the amount removed during the process, in 30 ml units. Refrigerant dissolves in lubricant sample. This creates the illusion that more lubricant has been recovered than actually has been. The equipment lubricant measuring system must

take in account such dissolved refrigerant to prevent overcharging the vehicle system with lubricant. Note: Use only new lubricant to replace the amount removed during the recycle process. Used lubricant should be discarded per applicable federal, state, and local requirements.

7.8 The equipment must be capable of continuous operation in ambient of 10 to 49 °C (50 to 120 °F).

7.9 The equipment should be compatible with leak detection material that may be present in the mobile AC system.

8. Testing

This test procedure and the requirement are used for evaluation of the equipment for its ability to clean the contaminated R-12 refrigerant.

8.1 The equipment shall clean the contaminated R-12 refrigerant to the minimum purity level as defined in SAE J1991, when tested in accordance with the following conditions:

8.2 For test validation, the equipment is to be operated according to the manufacturer's instructions.

8.3 The equipment must be preconditioned with 13.6 kg (30 lb) of the standard contaminated R-12 at an ambient of 21 °C (70 °F) before starting the test cycle. Sample amounts are not to exceed 1.13 kg (2.5 lb) with sample amounts to be repeated every 5 min. The sample method fixture, defined in Fig. 1, shall be operated at 24 °C (75 °F).

8.4 Contaminated R-12 Samples.

8.4.1 Standard contaminated R-12 refrigerant shall consist of liquid R-12 with 100 ppm (by weight) moisture at 21 °C (70 °F) and 45,000 ppm (by weight) mineral oil 525 suspension nominal and 770 ppm by weight of non-condensable gases (air).

8.4.2 High moisture contaminated sample shall consist of R-12 vapor with 1,000 ppm (by weight) moisture.

8.4.3 High oil contaminated sample shall consist of R-12 with 200,000 ppm (by weight) mineral oil 525 suspension viscosity nominal.

8.5 Test Cycle.

8.5.1 After preconditioning as stated in 8.3, the test cycle is started, processing the following contaminated samples through the equipment:

8.5.1.1 3013.6 kg (30 lb) of standard contaminated R-12.

8.5.1.2 1 kg (2.2 lb) of high oil contaminated R-12.

8.5.1.3 4.5 kg (10 lb) of standard contaminated R-12.

8.5.1.4 1 kg (2.2 lb) of high moisture contaminated R-12.

8.6 Equipment Operating Ambient.

8.6.1 The R-12 is to be cleaned to the minimum purity level, as defined in SAE J1991, with the equipment operating in a stable ambient of 10, 21, and 49 °C (50, 70, and 120 °F) and processing the samples as defined in 8.5.

Pt. 82, Subpt. B, App. A

40 CFR Ch. I (7–1–24 Edition)

8.7 Sample Analysis.

8.7.1 The processed contaminated sample shall be analyzed according to the following procedure.

8.8 Quantitative Determination of Moisture.

8.8.1 The recycled liquid phase sample of CFC-12 shall be analyzed for moisture content via Karl Fischer coulometer titration or an equivalent method. The Karl Fischer apparatus is an instrument for precise determination of small amounts of water dissolved in liquid and/or gas samples.

8.8.2 In conducting the test, a weighed sample of 30 to 130 grams is vaporized directly into the Karl Fischer analyte. A coulometer titration is conducted and the results are calculated and displayed as parts per million moisture (weight).

8.9 Determination of Percent Lubricant.

8.9.1 The amount of oil in the recycled sample of CFC-12 is to be determined by gravimetric analysis.

8.9.2 Following venting of noncondensable, in accordance with the manufacturer's operating instructions, the refrigerant container shall be shaken for 5 minutes prior to extracting samples for test.

8.9.3 A weighted sample of 175 to 225 grams of liquid CFC-12 is allowed to evaporate at room temperature. The percent oil is to be calculated from the weight of the origi-

nal sample and the residue remaining after the evaporation.

8.10 Noncondensable Gas.

8.10.1 The amount of noncondensable gas is to be determined by gas chromatography. A sample of vaporized refrigerant liquid shall be separated and analyzed by gas chromatography. A Porapak Q column at 130 °C and a hot wire detector may be used for analysis.


8.10.2 This test shall be conducted on recycled refrigerant (taken from the liquid phase) within 30 minutes after the proper venting of noncondensable.

8.10.3 Samples shall be shaken for 8 hours prior to retesting while at a temperature of 24 ± 2.8 °C (75 ± 5 °F). Known volumes of refrigerant vapor are to be injected for separation and analysis by means of gas chromatography. A Porapak Q column at 130 °C (266 °F) and a hot wire detector are to be used for the analysis.

8.10.4 This test shall be conducted at 21 and 49 °C and may be performed in conjunction with the testing defined in Section 8.6. The equipment shall process at least 13.6 kg of standard contaminated refrigerant for this test.

8.11 Sample Requirements.

8.11.1 The sample shall be tested as defined in 8.7, 8.8, 8.9, and 8.10 at ambient temperatures of 10, 21, and 49 °C (50, 70, and 120 °F) as defined in 8.6.1.

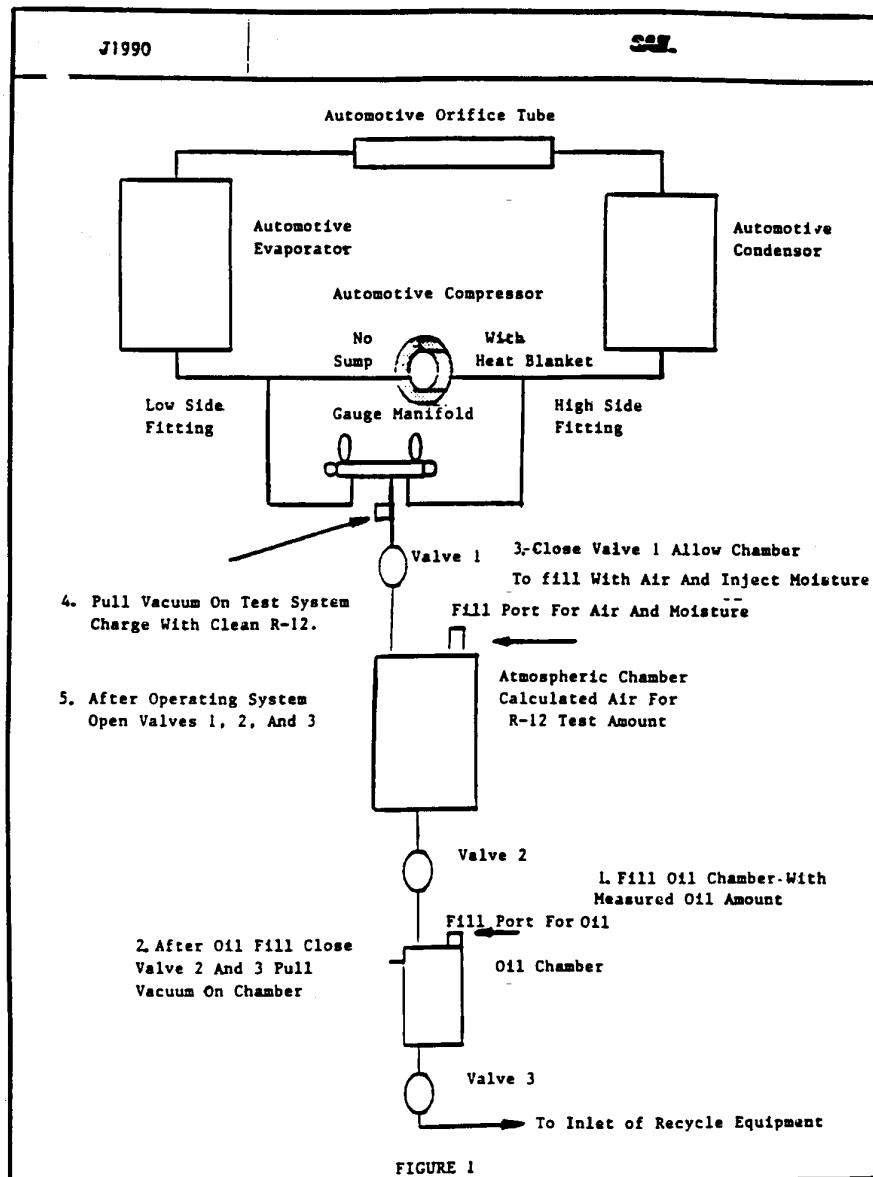

RECOMMENDED SERVICE PROCEDURE FOR THE CONTAINMENT OF R-12

1. Scope

During service of mobile air-conditioning systems, containment of the refrigerant is

important. This procedure provides service guidelines for technicians when repairing vehicles and operating equipment defined in SAE J1990.

2. References

SAE J1990, Extraction and Recycle Equipment for Mobile Automotive Air-Conditioning Systems

3. Refrigerant Recovery Procedure

3.1 Connect the recovery unit service hoses, which shall have shutoff valves within 12 in (30 cm) of the service ends, to the vehicle air-conditioning system service ports.

3.2 Operate the recovery equipment as covered by the equipment manufacturers recommended procedure.

3.2.1 Start the recovery process and remove the refrigerant from the vehicle AC system. Operate the recovery unit until the vehicle system has been reduced from a pressure to a vacuum. With the recovery unit shut off for at least 5 min, determine that there is no refrigerant remaining in the vehicle AC system. If the vehicle system has pressure, additional recovery operation is required to remove the remaining refrigerant. Repeat the operation until the vehicle AC system vacuum level remains stable for 2 min.

3.3 Close the valves in the service lines and then remove the service lines from the vehicle system. Proceed with the repair/service. If the recovery equipment has automatic closing valves, be sure they are properly operating.

4. Service With Manifold Gage Set

4.1 Service hoses must have shutoff valves in the high, low, and center service hoses within 12 in (30 cm) of the service ends. Valves must be closed prior to hose removal

from the air-conditioning system. This will reduce the volume of refrigerant contained in the service hose that would otherwise be vented to atmosphere.

4.2 During all service operations, the valves should be closed until connected to the vehicle air-conditioning system or the charging source to avoid introduction of air and to contain the refrigerant rather than vent open to atmosphere.

4.3 When the manifold gage set is disconnected from the air-conditioning system or when the center hose is moved to another device which cannot accept refrigerant pressure, the gage set hoses should first be attached to the reclaim equipment to recover the refrigerant from the hoses.

5. Recycled Refrigerant Checking Procedure for Stored Portable Auxiliary Container

5.1 To determine if the recycled refrigerant container has excess noncondensable gases (air), the container must be stored at a temperature of 65 °F (18.3 °C) or above for a period of time, 12 h, protected from direct sun.

5.2 Install a calibrated pressure gage, with 1 psig divisions (0.07 kg), to the container and determine the container pressure.

5.3 With a calibrated thermometer, measure the air temperature within 4 in (10 cm) of the container surface.

5.4 Compare the observed container pressure and air temperature to determine if the container exceeds the pressure limits found on Table 1, e.g., air temperature 70 °F (21 °C) pressure must not exceed 80 psig (5.62 kg/cm²).

TABLE 1

Temp °F	Psig	Temp °F	Psig	Temp °F	Psig	Temp °F	Psig	Temp °F	Psig
65	74	75	87	85	102	95	118	105	136
66	75	76	88	86	103	96	120	106	138
67	76	77	90	87	105	97	122	107	140
68	78	78	92	88	107	98	124	108	142
69	79	79	94	89	108	99	125	109	144
70	80	80	96	90	110	100	127	110	146
71	82	81	98	91	111	101	129	111	148
72	83	82	99	92	113	102	130	112	150
73	84	83	100	93	115	103	132	113	152
74	86	84	101	94	116	104	134	114	154

TABLE 1 (METRIC)

Temp °C	Pres	Temp °C	Pres	Temp °C	Pres	Temp °C	Pres	Temp °C	PRres
18.3	5.20	23.9	6.11	29.4	7.17	35.0	8.29	40.5	9.56
18.8	5.27	24.4	6.18	30.0	7.24	35.5	8.43	41.1	9.70
19.4	5.34	25.0	6.32	30.5	7.38	36.1	8.57	41.6	9.84
20.0	5.48	25.5	6.46	31.1	7.52	36.6	8.71	42.2	9.98
20.5	5.55	26.1	6.60	31.6	7.59	37.2	8.78	42.7	10.12
21.1	5.62	26.6	6.74	32.2	7.73	37.7	8.92	43.3	10.26
21.6	5.76	27.2	6.88	32.7	7.80	38.3	9.06	43.9	10.40
22.2	5.83	27.7	6.95	33.3	7.94	38.8	9.13	44.4	10.54
22.7	5.90	28.3	7.03	33.9	8.08	39.4	9.27	45.0	10.68
23.3	6.04	28.9	7.10	34.4	8.15	40.0	9.42	45.5	10.82

Pres kg/sq cm.

Environmental Protection Agency

5.5 If the container pressure is less than the Table 1 values and has been recycled, limits of noncondensable gases (air) have not been exceeded and the refrigerant may be used.

5.6 If the pressure is greater than the range and the container contains recycled material, slowly vent from the top of the container a small amount of vapor into the recycle equipment until the pressure is less than the pressure shown on Table 1.

5.7 If the container still exceeds the pressure shown on Table 1, the entire contents of the container shall be recycled.

6. Containers for Storage of Recycled Refrigerant

6.1 Recycled refrigerant should not be salvaged or stored in disposable refrigerant containers. This is the type of container in which virgin refrigerant is sold. Use only DOT CFR title 49 or UL approved storage containers for recycled refrigerant.

6.2 Any container of recycled refrigerant that has been stored or transferred must be checked prior to use as defined in section 5.

7. Transfer of Recycled Refrigerant

7.1 When external portable containers are used for transfer, the container must be evacuated at least 27 in of vacuum (75 mm Hg absolute pressure) prior to transfer of the recycled refrigerant. External portable containers must meet DOT and UL standards.

7.2 To prevent on-site overfilling when transferring to external containers, the safe filling level must be controlled by weight and must not exceed 60% of container gross weight rating.

8. Disposal of Empty/Near Empty Containers

8.1 Since all the refrigerant may not be removed from disposable refrigerant containers during normal system charging procedures, empty/near empty container contents should be reclaimed prior to disposal of the container.

8.2 Attach the container to the recovery unit and remove the remaining refrigerant. When the container has been reduced from a pressure to a vacuum, the container valve can be closed. The container should be marked empty and is ready for disposal.

Rationale

Not applicable.

Relationship of SAE Standard to ISO Standard.

Not applicable.

Reference Section

SAE J1990, Extraction and Recycle Equipment for Mobile Automotive Air-Conditioning Systems

Pt. 82, Subpt. B, App. B

Application

During service of mobile air-conditioning systems, containment of the refrigerant is important. This procedure provides service guidelines for technicians when repairing vehicles and operating equipment defined in SAE J1990.

Committee Composition

Developed by the SAE Defrost and Interior Climate Control Standards Committee

W.J. Atkinson, Sun Test Engineering, Paradise Valley, AZ—Chairman
J.J. Amin, Union Lake, MI
H.S. Andersson, Saab Scania, Sweden
P.E. Anglin, ITT Higbie Mfg. Co., Rochester, MI
R.W. Bishop, GMC, Lockport, NY
D.Hawks, General Motors Corporation, Pontiac, MI
J.J. Hernandez, NAVISTAR, Ft. Wayne, IN
H. Kaltner, Volkswagen AG, Germany, Federal Republic
D.F. Last, GMC, Troy, MI
D.E. Linn, Volkswagen of America, Warren, MI
J.H. McCorkel, Freightliner Corp., Charlotte, NC
C.J. McLachlan, Livonia, MI
H.L. Miner, Climate Control Inc., Decatur, IL
R.J. Niemiec, General Motors Corp., Pontiac, MI
N. Novak, Chrysler Corp., Detroit, MI
S. Oulouhojian, Mobile Air Conditioning Society, Upper Darby, PA
J. Phillips, Air International, Australia
R.H. Proctor, Murray Corp., Cockeysville, MD
G. Rolling, Behr America Inc., Ft. Worth, TX
C.D. Sweet, Signet Systems Inc., Harrodsburg, KY
J.P. Telesz, General Motors Corp., Lockport, NY

APPENDIX B TO SUBPART B OF PART 82—STANDARD FOR RECOVER EQUIPMENT

SAE J1989, Recommended Service Procedure for the Containment of R-12, as set forth under Appendix A, also applies to this Appendix B.

SAE J2209, issued June, 1992.

SAE RECOMMENDED PRACTICE: CFC-12 (R-12) EXTRACTION EQUIPMENT FOR MOBILE AUTOMOTIVE AIR-CONDITIONING SYSTEMS

Foreword

CFCs deplete the stratospheric ozone layer that protects the earth against harmful ultraviolet radiation. To reduce the emissions

of CFCs, the 1990 Clean Air Act requires recycle of CFC-12 (R-12) used in mobile air-conditioning systems to eliminate system venting during service operations. SAE J1990 establishes equipment specifications for on-site recovery and reuse of CFCs in mobile air-conditioning systems. Establishing extraction equipment specifications for CFC-12 will provide service facilities with equipment to assure that venting of refrigerant will not occur.

1. Scope

The purpose of this document is to provide equipment specifications for CFC-12 (R-12) recovery for recycling on-site or for transport off-site to a refrigerant reclamation facility that will process it to ARI (Air-Conditioning and Refrigeration Institute) standard 700-93 as a minimum. It is not acceptable that the refrigerant removed from a mobile air-conditioning system, with this equipment, be directly returned to a mobile air-conditioning system.

This information applies to equipment used to service automobiles, light trucks, and other vehicles with similar CFC-12 systems.

2. References

2. Applicable Documents—The following documents form a part of this specification to the extent specified herein.

2.1.1 SAE Publications—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J639—Vehicle Service Coupling

SAE J1990—Extraction and Recycle Equipment for Mobile Automotive Air-Conditioning Systems

SAE J2196—Service Hose for Automotive Air-Conditioning

2.1.2 ARI Publications—Available from Air-Conditioning and Refrigeration Institute, 1501 Wilson Boulevard, Sixth Floor, Arlington, VA 22209.

ARI 700-93—Specifications for Fluorocarbon Refrigerants

2.1.3 CGA Publications—Available from CGA, Crystal Gateway #1, Suite 501, 1235 Jefferson Davis Highway, Arlington, VA 22202.

CGA S-1.1—Pressure Relief Device Standard Part 1—Cylinders for Compressed Gases

2.1.4 DOT Specifications—Available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

49 CFR, Section 173.304—Shippers—General Requirements for Shipments and Packagings

2.1.5 UL Publications—Available from Underwriters Laboratories, 333 Pfingsten Road, Northbrook, IL 60062-2096.

UL 1769—Cylinder Valves

3. Specifications and General Description

3.1 The equipment must be able to extract CFC-12 from a mobile air-conditioning system.

3.2 The equipment discharge or transfer fitting shall be unique to prevent the unintentional use of extracted CFC-12 to be used for recharging auto air conditioners.

3.3 The equipment shall be suitable for use in an automotive service garage environment as defined in 6.8.

3.4 Equipment Certification—The equipment must be certified by Underwriters Laboratories or an equivalent certifying laboratory to meet this standard.

3.5 Label Requirements—The equipment shall have a label “Design Certified by (company name) to meet SAE J2209 for use with CFC-12. The refrigerant from this equipment must be processed to ARI 700-93 specifications before reuse in a mobile air-conditioning system.” The minimum letter size shall be bold type 3mm in height.

4. Safety Requirements

4.1 The equipment must comply with applicable federal, state and local requirements on equipment related to the handling of R-12 material. Safety precautions or notices or labels related to the safe operation of the equipment shall also be prominently displayed on the equipment and should also state “CAUTION—SHOULD BE OPERATED BY CERTIFIED PERSONNEL.” The safety identification shall be located on the front near the controls.

4.2 The equipment must comply with applicable safety standards for electrical and mechanical requirements.

5. Operating Instructions

5.1 The equipment manufacturer must provide operating instructions, necessary maintenance procedures and source information for replacement parts and repair.

5.2 The equipment must prominently display the manufacturer's name, address and any items that require maintenance or replacement that affect the proper operation of the equipment. Operation manuals must cover information for complete maintenance of the equipment to assure proper operation.

6. Functional Description

6.1 The equipment must be capable of ensuring recovery of the CFC-12 from the system being serviced, by reducing the system pressure to a minimum of 102 mm of mercury below atmospheric. To prevent system delayed outgassing, the unit must have a device that assures that the refrigerant has been recovered from the air-conditioning system.

6.1.1 Testing laboratory certification of the equipment capability is required which

shall process contaminated refrigerant samples at specific temperatures.

6.2 The equipment must be preconditioned with 13.6 kg of the standard contaminated CFC-12 at an ambient of 21 °C before starting the test cycle. Sample amounts are not to exceed 1.13 kg with sample amounts to be repeated every 5 minutes. The sample method fixture defined in Figure 1 of appendix A shall be operated at 24 °C. Contaminated CFC-12 samples shall be processed at ambient temperatures of 10 and 49 °C.

6.2.1 Contaminated CFC-12 sample.

6.2.2 Standard contaminated CFC-12 refrigerant, 13.6 Kg sample size, shall consist of liquid CFC-12 with 100 ppm (by weight) moisture at 21 °C and 45,000 ppm (by weight) mineral oil 525 suspension nominal and 770 ppm (by weight) of noncondensable gases (air).

6.3 Portable refillable containers used in conjunction with this equipment must meet applicable DOT standards.

6.3.1 The container color must be gray with yellow top to identify that it contains used CFC-12 refrigerant. It must be permanently marked on the outside surface in black print at least 20 mm high "DIRTY R-12—DO NOT USE, MUST BE REPROCESSED".

6.3.2 The portable refillable container shall have a SAE 3/8 inch flare male thread connection as identified in SAE J639 CFC-12 High Pressure Charging Valve Figure 2.

6.3.3 During operation the equipment shall provide overfill protection to assure that the storage container liquid fill does not exceed 80% of the tank's rated volume at 21 °C per DOT standard, CFR Title 49, section 173.304 and the American Society of Mechanical Engineers.

6.4 Additional Storage Tank Requirements.

6.4.1 The cylinder valve shall comply with the standard for cylinder valves, UL 1769.

6.4.2 The pressure relief device shall comply with the pressure relief device standard part 1, CGA pamphlet S-1.1.

6.4.3 The container assembly shall be marked to indicate the first retest date, which shall be 5 years after date of manufacture. The marking shall indicate that retest must be performed every subsequent five years. The marking shall be in letters at least 6 mm high.

6.5 All flexible hoses must meet SAE J2196 standard for service hoses.

6.6 Service hoses must have shutoff devices located within 30 cm of the connection point to the system being serviced to minimize introduction of noncondensable gases into the recovery equipment during connection and the release of the refrigerant during disconnection.

6.7 The equipment must be able to separate the lubricant from the recovered refrigerant and accurately indicate the amount re-

moved from the system during processing in 30 ml units.

6.7.1 The purpose of indicating the amount of lubricant removed is to ensure that a proper amount is returned to the mobile air-conditioning system for compressor lubrication.

6.7.2 Refrigerant dissolved in this lubricant must be accounted for to prevent system lubricant overcharge of the mobile air-conditioning system.

6.7.3 Only new lubricant, as identified by the system manufacturer, should be replaced in the mobile air-conditioning system.

6.7.4 Removed lubricant from the system and/or the equipment shall be disposed of in accordance with applicable federal, state and local procedures and regulations.

6.8 The equipment must be capable of continuous operation in ambient temperatures of 10 °C to 49 °C and comply with 6.1.

6.9 The equipment should be compatible with leak detection material that may be present in the mobile air-conditioning system.

7.0 For test validation, the equipment is to be operated according to the manufacturer's instructions.

[60 FR 21688, May 2, 1995]

APPENDIX C TO SUBPART B OF PART 82— SAE J2788 STANDARD FOR RECOVERY/RECYCLE AND RECOVERY/RECYCLE/RECHARGING EQUIPMENT FOR HFC-134a REFRIGERANT

FOREWORD

This Appendix establishes the specific minimum equipment requirements for the recovery/recycling of HFC-134a that has been directly removed from, and is intended for reuse in, mobile air-conditioning systems and recovery/recycling and system recharging of recycled, reclaimed or virgin HFC-134a. Establishing such specifications will ensure that system operation with recycled HFC-134a will provide the same level of performance and durability as new refrigerant.

1. SCOPE

The purpose of this SAE Standard is to establish the specific minimum equipment performance requirements for recovery and recycling of HFC-134a that has been directly removed from, and is intended for reuse in, mobile air-conditioning (A/C) systems. It also is intended to establish requirements for equipment used to recharge HFC-134a to an accuracy level that meets Section 9 of this document and SAE J2099. The requirements apply to the following types of service equipment and their specific applications.

a. Recovery/Recycling Equipment,

Pt. 82, Subpt. B, App. C

40 CFR Ch. I (7–1–24 Edition)

b. Recovery/Recycling—Refrigerant Charging,

c. Refrigerant Recharging Equipment Only.

1.1 Improved refrigerant recovery equipment is required to ensure adequate refrigerant recovery to reduce emissions and provide for accurate recharging of mobile air conditioning systems. Therefore, 12 months following the publication date of this standard, requirements in this standard supplements and supersedes, SAE J2210.

2. REFERENCES

2.1 Applicable Publications

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest issue of SAE publications shall apply.

2.1.1 SAE Publications

Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J2099 Standard of Purity for Recycled HFC-134a (R-134a) for Use in Mobile Air-Conditioning Systems

SAE J2196 Service Hoses for Automotive Air-Conditioning

SAE J2197 Service Hose Fittings for Automotive Air-Conditioning

SAE J2296 Retest of Refrigerant Container

2.1.2 CGA Publications

Available from CGA, 4221 Walney Road, 5th Floor, Chantilly VA 20151-2923, Tel: 703-788-2700, <http://www.cganet.com>.

CGA Pamphlet S-1.1 Pressure Relief Device Standard Part 1—Cylinders for Compressed Gases 2.1.3 DOT Publications

Available from the Superintendent of Documents, U.S. Government Printing Office, Mail Stop: SSOP, Washington, DC 20402-9320.

OT Standard, CFR Title 49, Section 173.304 Shippers—General Requirements for Shipments and Packagings

2.1.4 UL Publications

Available from Underwriters Laboratories Inc., 333 Pfingsten Road, Northbrook, IL 60062-2096, Tel: 847-272-8800, <http://www.ul.com>.

UL 1769 Cylinder Valves

UL 1963 Refrigerant Recovery/Recycling Equipment

3. SPECIFICATION AND GENERAL DESCRIPTION

3.1 The equipment must be able to remove and process HFC-134a (R-134a) from mobile A/C systems to the purity level specified in SAE J2099.

3.2 The equipment shall be suitable for use in an automotive service garage environment and be capable of continuous operation in ambients from 10 °C to 49 °C (50 °F to 120 °F). If it is designed to recharge a system, and it uses a scale for this purpose, the scale must demonstrate the ability to maintain accuracy per the test in 10.2.

3.3 The equipment must be certified that it meets this specification by an EPA listed certifying laboratory.

3.4 The equipment shall have a label, which states, “Certified by (Certifying Agent) to Meet SAE J2788 superseding SAE J2210” in bold-type letters a minimum of 3 mm (3/16 in) in height.

4. REFRIGERANT RECYCLING EQUIPMENT REQUIREMENTS

4.1 Moisture and Acid

The equipment shall incorporate a desiccant package that must be replaced before saturation with moisture, and whose mineral acid capacity is at least 5% by weight of the dry desiccant.

4.1.1 The equipment shall be provided with a means of indicating when the filter desiccant moisture capacity has reached the allowable limit and desiccant replacement is required. This may include a reliable means of detecting moisture level or an algorithm based on the amount refrigerant recovered. The user must be clearly alerted to replace the filter prior to the full saturation. Warnings shall be displayed on screens and (printed on printouts where applicable). The warnings must explain that the machine is approaching the end of filter life. The manufacturer must incorporate a lockout when the end of filter life is reached.

4.1.2 The manufacturer shall use an identification system to ensure that a new filter has been installed to reset the machine for operation.

4.2 Filter

The equipment shall incorporate an in-line filter that will trap particulates of 15 micron spherical diameter or greater.

4.3 Scale (if used)

The scale must maintain accuracy when moved, as per the test in Section 10.

4.4 Purging Noncondensable Gases

4.4.1 The equipment shall automatically purge noncondensables (NCGs), which are primarily air, if the acceptable level is exceeded. NCG removal must be part of the normal operation of the equipment and instructions must be provided to enable the task to be accomplished within 30 min (to reach the refrigerant purity level specified in SAE J2099).

4.4.2 Refrigerant loss from noncondensable gas purging during the testing described in Section 8 shall be minimized by a method that initiates a purge when the machine has not been in use for a period long enough for air-refrigerant separation in the tank to have occurred.

4.5 Recharging and Transfer of Recycled Refrigerant

Recycled refrigerant for recharging and transfer shall be taken from the liquid phase only.

5. SAFETY REQUIREMENTS

5.1 The equipment must comply with applicable federal, state, and local requirements on equipment related to handling HFC-134a material. Safety precautions or notices related to safe operation of the equipment shall be prominently displayed on the equipment and should also state "CAUTION—SHOULD BE OPERATED BY QUALIFIED PERSONNEL."

5.2 Under NO CIRCUMSTANCES should any equipment be pressure tested or leak tested with air/HFC-134a mixtures.

Do not use compressed air (shop air) or leak detection in systems containing HFC-134a.

6. OPERATING INSTRUCTIONS

6.1 The equipment manufacturer shall provide a warning in the instruction manual regarding the possibility of refrigerant contamination in the mobile A/C system being serviced.

6.1.1 If recovery/recycle equipment has refrigerant identification equipment, the refrigerant identification equipment shall meet the requirements of SAE J1771.

6.1.2 Recovery/recycling equipment not having refrigerant identification capability shall have instructions in the equipment manual covering possible contamination problems to the equipment and the contamination of the existing recycled refrigerant in the container in the equipment.

6.2 The equipment manufacturer must provide operating instructions, including proper attainment of vehicle system vacuum (i.e., when to stop the extraction process), filter/desiccant replacement, and purging of noncondensable gases (air). Also to be included are any other necessary maintenance procedures, source information for replace-

ment parts and, repair and safety precautions.

6.2.1 The manual shall identify the proper maintaining of hose and seals to prevent the addition of excess air, due to leaks, during the recovery process, which would increase the NCG level in the recovered refrigerant.

6.3 The equipment must prominently display the manufacturer's name, address, the type of refrigerant it is designed to recycle, a service telephone number, and the part number for the replacement filter/drier.

7. FUNCTIONAL DESCRIPTION

The ability of the equipment to meet the refrigerant recovery and recharge specifications of this section shall be determined by the test procedures of Section 10.

7.1 The equipment must be capable of continuous operation in ambient temperatures of 10 °C (50 °F) to 49 °C (120 °F). Continuous is defined as completing recovery/recycle and recharge (if applicable) operations with no more than a brief reset period between vehicles, and shall not include time delays for allowing a system to outgas (which shall be part of the recovery period provided by this standard). Continuous may include time out for an air purge if necessary, although it is understood that extended equipment-off time is preferred to allow NCG and refrigerant separation in the supply tank for optimum results.

7.1.1 The equipment shall be capable of removing a minimum of 95.0% of the refrigerant from the test system in 30 minutes or less, without external heating, or use of any device (such as shields, reflectors, special lights, etc.) which could heat components of the system. The recovery procedures shall be based on 21 to 24 °C (70 to 75 °F) ambient temperature. The test system for qualifying shall be a 1.4 kg (3.0 lbs) capacity orifice tube/accumulator system in a 2005 Chevrolet Suburban with front and rear A/C, or the test option described in 10.5, and shall be determined by accurately weighing the recovery machine with the resolution and accuracy of within 3 g (.006 lb) in the range of the machine's weight. The laboratory shall maintain records of the vehicle, including its VIN (vehicle identification number).

7.1.2 However, the preceding shall not preclude a brief period of engine operation at fast idle (up to 15 minutes, up to 2000 rpm) to circulate refrigerant and oil, and provide some engine and warm-up of A/C refrigeration components. The laboratory shall monitor coolant temperature per the vehicle engine coolant temperature sensor, and coolant temperature shall not be allowed to exceed 105 °C (221 °F). The time required shall not be included in the total time of 30 minutes set forth in 7.1.1.

7.1.3 The refrigerant that is recovered, following oil separation, shall be measured and the quantity displayed, accurate to

within ± 30 g (1.0 oz). The equipment must include a provision for checking the accuracy, per the requirements of 9.1.

7.2 During recovery operation, the equipment shall provide overfill protection to assure that the liquid fill of the storage container (which may be integral or external) does not exceed 80% of the tank's rated volume at 21 °C per Department of Transportation (DOT) Standard, CFR Title 49, Section 173.304 and the American Society of Mechanical Engineers.

7.3 Portable refillable tanks or containers used in conjunction with this equipment must be labeled "HFC-134a (R-134a)," meet applicable Department of Transportation (DOT) or Underwriters Laboratories (UL) Standards, and shall incorporate fittings per SAE J2197.

7.3.1 The cylinder valve shall comply with the standard for cylinder valves, UL 1769.

7.3.2 The pressure relief device shall comply with the Pressure Relief Device Standard Part 1—Cylinders for Compressed Gases, CGA Pamphlet S-1.1.

7.3.3 The tank assembly shall be marked to indicate the first retest date, which shall be 5 years after the date of manufacture. The marking shall indicate that retest must be performed every subsequent 5 years. SAE J2296 provides an inspection procedure. The marking shall be in letters at least 6 mm ($\frac{1}{4}$ in) high.

7.3.4 ASME tanks as defined in UL-1963 may be used and are exempt from the retest requirements.

7.3.5 If the machine is designed for recharging, and the marketer permits use of a non-refillable refrigerant tank, the machine shall include a way to ensure refrigerant remaining in the tank (called the "heel") to no more than 2% of tank rated capacity when the tank is indicated to be empty. This may be done by the machine marketer as follows:

- Specify a non-venting procedure, to minimize the amount of unused refrigerant remaining in the tank. The machine shall include any devices required for the procedure, other than ordinary service shop tools and supplies, and include in the operator's manual, any instructions.
- Provide an automatic or (with instructions in the operator's manual) semi-automatic non-venting procedure with the machine.

The laboratory shall test for the 2% capability. For testing purposes it may use a refillable tank, minimum 15 lb capacity (6.8 kg) containing a minimum of 7.5 lbs (3.4 kg) refrigerant. The test is as follows:

a. Weigh the tank at the start of the test, on a scale accurate to plus/minus 3 grams, to ensure it contains sufficient refrigerant.

b. Operate the machine to remove refrigerant from the tank, charging into a holding container until the tank is indicated to be

empty. Continue with the marketer's recommended procedure for the 2% capability.

c. Weigh the tank, on a scale accurate to plus/minus 3 grams.

d. Using the recovery compressor and/or a vacuum pump, draw the tank into a vacuum of 9 to 10 inches Mercury (225 to 250 mm Mercury). The tank must hold that vacuum with a decay of less than 10% in 10 minutes. If vacuum decays 10% or more, the procedure shall be repeated as necessary to ensure the tank is empty.

e. Weigh the tank on a scale accurate to plus/minus 3 grams. The difference in weight from Steps 3 to 5 shall be within 2% of the weight of the amount of refrigerant that is the tanks rated capacity.

f. This test may be performed at the conclusion of testing in 10.4 or 10.5. If the machine passes or has passed all other testing in this standard, the marketer may make modifications in procedure and/or machine operation and retest once at a later date, within 90 days. If the machine fails the retest, the machine must be completely retested per this standard, or may be certified per the following alternative. The marketer of the machine may specify use of a non-refillable refrigerant tank that provides for recycling and/or disposal of the residual refrigerant, in either case in a manner that does not vent. Or the marketer may exclude use of a one-way container, in the machine's operating instructions.

7.4 All flexible hoses must comply with SAE J2196.

7.5 Service hoses must have shutoff devices located at the connection point to the system being serviced. Any hoses or lines connected to refrigerant containers on or in the machine also shall have shutoff devices at the connection points, so that the containers may be changed without loss of refrigerant. A tank that is a permanent installation is exempt from this requirement.

7.6 The equipment shall separate oil from the refrigerant, measure the amount accurate to 20 ml (0.7 oz.), so the technician has an accurate basis for adding oil to the system.

7.6.1 This statement shall be predominately identified in the equipment service manual.

NOTE: Use only new lubricant to replace the amount removed during the recycling process. Used lubricant should be discarded per applicable federal, state and local requirements.

8. TESTING

This test procedure and its requirements are to be used to determine the ability of the recycling equipment to adequately recycle contaminated refrigerant.

Environmental Protection Agency

Pt. 82, Subpt. B, App. C

8.1 The equipment shall be able to clean the contaminated refrigerant in §8.3 to the purity level defined in SAE J2099.

8.2 The equipment shall be operated in accordance with the manufacturer's operating instructions.

8.3 Contaminated HFC-134a (R-134a) Sample

8.3.1 The standard contaminated refrigerant shall consist of liquid HFC-134a with 1300 ppm (by weight) moisture (equivalent to saturation at 38 °C, 100 °F), 45000 ppm (by weight) HFC-134a compatible lubricant, and 1000 ppm (by weight) of noncondensable gases (air).

8.3.1.1 The HFC-134a compatible lubricant referred to in 8.3.1, shall be polyalkylene glycol (PAG), ISO 100 such as UCLN or PAG ISO 46-55, such as Idemitsu or equivalent, which

shall contain no more than 1000 ppm by weight of moisture.

8.3.1.2 Although the test lubricant is a PAG, to conform to that used in the test vehicle system, the equipment manufacturer also shall ensure that it is compatible with polyol ester lubricant, such as ND 11 as used in electrically driven compressors in some hybrid vehicles.

8.4 Test Cycle

8.4.1 The equipment must be preconditioned by processing 13.6 kg (30 lb) of the standard contaminated HFC-134a at an ambient of 21 to 24 °C (70 to 75 °F) before starting the test cycle. 1.13 kg (2.56 lb) samples are to be processed at 5 min intervals. The test fixture, depicted in Figure 1, shall be operated at 21 to 24 °C (70 to 75 °F).

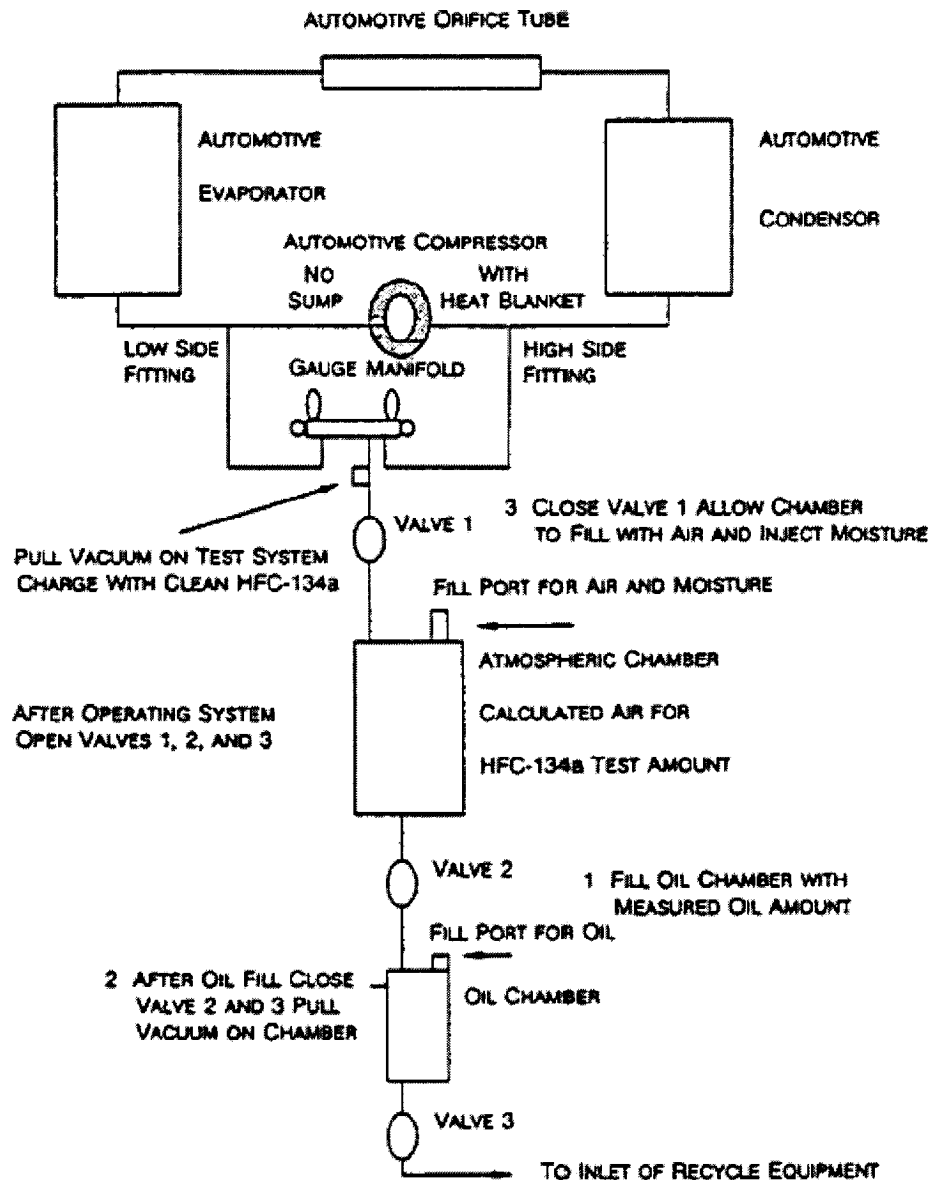


FIGURE 1 - TEST FIXTURE

8.4.2 Following the preconditioning procedure per 8.4.1, 18.2 kg (40 lb) of standard contaminated HFC-134a are to be processed by the equipment.

8.5 Sample Requirements

8.5.1 Samples of the standard contaminated refrigerant from 8.3.1 shall be processed as required in 8.6 and shall be analyzed

Environmental Protection Agency

Pt. 82, Subpt. B, App. C

after said processing as defined in 8.7, 8.8, and 8.9. Note exception for noncondensable gas determination in 8.9.4.

8.6 Equipment Operating Ambient

8.6.1 The HFC-134a is to be cleaned to the purity level, as defined in SAE J2099, with the equipment operating in a stable ambient of 10, 21, and 49 °C (50, 70 and 120 °F) while processing the samples as defined in 8.4.

8.7 Quantitative Determination of Moisture

8.7.1 The recycled liquid phase sample of HFC-134a shall be analyzed for moisture content via Karl Fischer coulometric titration, or an equivalent method. The Karl Fischer apparatus is an instrument for precise determination of small amounts of water dissolved in liquid and/or gas samples.

8.7.2 In conducting this test, a weighed sample of 30 to 130 g is vaporized directly into the Karl Fischer anolyte. A coulometric titration is conducted and the results are reported as parts per million moisture (weight).

8.8 Determination of Percent Lubricant
8.8.1 The amount of lubricant in the recycled HFC-134a sample shall be determined via gravimetric analysis. The methodology must account for the hygroscopicity of the lubricant.

8.8.2 Following venting of noncondensable gases in accordance with the manufacturer's operating instructions, the refrigerant container shall be shaken for 5 min prior to extracting samples for testing.

8.8.3 A weighed sample of 175 to 225 g of liquid HFC-134a is allowed to evaporate at room temperature. The percent lubricant is calculated from weights of the original sample and the residue remaining after evaporation.

8.9 Noncondensable Gases—Testing for Amount

8.9.1 The amount of noncondensable gases shall be determined by gas chromatography. A sample of vaporized refrigerant liquid shall be separated and analyzed by gas chromatography. A Porapak Q column at 130 °C (266 °F) and a hot wire detector may be used for the analysis.

8.9.2 This test shall be conducted on liquid phase samples of recycled refrigerant taken from a full container as defined in 7.2 within 30 min following the proper venting of noncondensable gases.

8.9.3 The liquid phase samples in 8.9.2 shall be vaporized completely prior to gas chromatographic analysis.

8.9.4 This test shall be conducted at 10 and 49 °C (50 and 120 °F) and may be performed in conjunction with the testing defined in 8.6. The equipment shall process at least 13.6 kg (30 lb) of standard contaminated refrigerant for this test.

8.9.5 The equipment shall be capable of charging refrigerant into systems with various lubrication types and shall deliver less than 1% by weight residual oil during system charge if the machine permits oil charging with refrigerant (due to residual oil in the service hoses and recovery unit refrigerant circuit from prior recovery, diagnostics and oil injection. This shall be determined during SAE J2099 testing.)

9. RECHARGING THE SYSTEM

9.1 It is the responsibility of the equipment manufacturer to ensure that the vacuum removal performance leaves the system 98% free of NCGs before recharging, following recovery and recycle under the provisions of this document.

The equipment must be capable of both indicating and recharging the system to within 15 g (0.50 oz) of vehicle manufacturer's specifications. The laboratory shall test for this capability by choosing a charge amount that is within the range of the vehicle manufacturer's specifications. The equipment must indicate and charge the system with that chosen amount, within ± 15 g (0.5 oz).

Example: If 500 g is chosen, the actual and indicated charge must be 485 to 515 g, with any difference between actual and indicated charge within the laboratory scale accuracy requirements of this standard. If a scale is used in the machine, the equipment manufacturer shall provide a method or service for the technician to check scale accuracy, and include any necessary accuracy-checking device (such as a calibration weight(s)) with the machine. If a mass flow system is used for charge determination, it must maintain accuracy equal to the 15 g (0.50 oz) specification. The equipment manufacturer shall provide a method for checking accuracy and include any necessary accuracy testing device(s) with the machine. If the accuracy testing device(s) for a scale or mass flow machine includes a consumable, the manufacturer shall include a quantity of replacement or refill devices for five years of periodic testing as recommended.

9.2 If any other system is used for charge determination, such as a positive displacement pump, the equipment manufacturer shall provide a method and any needed device(s) to check accuracy that is/are appropriate for its method of operation, including any temperature-compensating trim if used.

10. EQUIPMENT TEST PROCEDURE BY LABORATORY FOR RECOVERY/RECYCLING AND RECOVERY/RECYCLING/RECHARGING MACHINES

10.1 Preliminary: Ambient (in shop) temperature shall be 21 to 24 °C (70 to 75 °F). Test vehicle shall be "overnight cold" (not run for at least eight hours).

10.2 The machine must have a self-contained provision for checking accuracy of

the indicated amount of refrigerant recovered in liquid or vapor or mixture form(s) from a vehicle system and (if applicable) charged into a vehicle, and adjusting if necessary, to meet requirements of 9.1, 9.2. Therefore: If the machine uses a scale for that purpose, check the accuracy of that scale and make any adjustment if necessary. If an alternative method of measuring refrigerant is used, follow the equipment manufacturer's procedure for ensuring accuracy. Next, move the machine, such as by rolling it, along the floor, a minimum of 20 feet (6.1 meters) within 10 seconds. Follow with the test procedure in 10.3, then 10.4 or 10.5.

10.3 Test Procedure

If desired, this test procedure may be preceded by engine/system operation for up to 15 minutes, up to 2000 rpm.

1. You must start with an empty system, using this method: (a) Operate machine to recover refrigerant, per equipment manufacturer's instructions. (b) Deep-vacuum system to a minimum of 710 mm (28 in) of mercury. (c) Monitor vacuum for decay, checking every 20 minutes. If decay exceeds 75 mm (3 in), deep vacuum the system again. When system holds 710 mm (28 in) 75 mm (3 in) of mercury vacuum for three hours, it is considered empty.

2. Place machine on a platform scale with the capacity to weigh the recovery/recycle/recharge machine, and with the resolution and accuracy of within ± 3 g (.006 lb) in the range of the machine's weight. Weight should include the machine's service hoses draped over the machine, and with the machine's oil reservoir removed. If necessary to add oil to vehicle system as a result of a system operation preparatory to the recovery process, inject the needed quantity through the service valve at this time.

3. Record weight of machine in as weight A.

4. Reconnect service hoses to the test vehicle.

5. Follow the equipment manufacturer's specified procedure for charging the vehicle manufacturer's recommended amount of refrigerant into the system. Note: if this does not apply to the machine under test, *i.e.* a recovery/recycling only machine, the use of charging equipment that meets this standard and the platform scale shall be used to verify the accuracy of the charge.

6. Disconnect the service hoses from the test vehicle and drape them on the machine. Check and record the weight of the machine. Record this weight as weight B. The difference between weight A and weight B should be equal to the recommended charge that was installed per the machine's display, within 15 g (0.5 oz). If the difference is greater than 15 g (± 3 g), the machine fails the charge accuracy test, and no other tests shall be performed at that time. The manu-

facturer must document changes made to improve accuracy and furnish them to the laboratory prior to a new test. Exception: If the maximum deviation is no more than a total of 20 g, the calibration of the scale or other measuring system may be rechecked and readjusted once, and the entire test repeated just once.

10.4 Recovery Test Using a Vehicle

1. Following a successful system charge, the system and engine shall be run for 15 minutes at 2000 rpm to circulate oil and refrigerant, following which engine and system shall rest for eight hours. Then the laboratory may begin the recovery test. If the machine manufacturer specifies, operate the engine/system for up to 15 minutes, at up to 2000 rpm, then shut off engine/system.

2. If the machine has an automatic air purge, disable it. Check the weight of the machine with the platform scale (service hoses draped over machine, oil reservoir removed). Record the number as Weight C. Reinstall oil reservoir if it had been removed in the recovery procedure.

3. Start timer. Connect service hoses to system of test vehicle and perform recovery per the equipment manufacturer's instructions. The vehicle system service valves' cores must remain in the fittings for this procedure.

4. When recovery is completed, including from service hoses if that is part of the recommended procedure, disconnect hoses and drape over machine. Stop timer. The elapsed time shall be 30.0 minutes or less. If it is in excess of this time, the machine fails the test and no retest is allowed. The manufacturer must document changes made to the machine to improve its performance before a new test is allowed, and furnish them to the laboratory.

5. If the recovery is completed in no more than the 30.0 minutes, measure the oil level in the reservoir, remove the reservoir and then determine the amount of refrigerant recovered, as detailed in Nos. 6 and 7: As measured by the machine and also by noting the weight of the platform scale, which shall be recorded as Weight D.

6. The platform scale shall indicate that a minimum of 95% of the amount charged into the system has been recovered. If the platform scale indicates a lower percentage has been recovered, the machine fails the recovery test.

7. The machine display shall indicate that a minimum of 95.0% of the amount charged into the system has been recovered, within a tolerance of ± 30 g (1 oz) when compared with the platform scale (Weight D minus Weight C). The 30 g (1 oz) tolerance may produce a machine display reading that is below the 95.0% recovery. If a greater difference between machine and platform scale occurs, the machine fails the recovery test.

10.5 Recovery Test Fixture Test Option

If an equipment manufacturer chooses, as an alternative to the actual vehicle, it may certify to SAE J2788 with a laboratory fixture that is composed entirely of all the original equipment parts of a single model year for the 3.0 lb capacity front/rear A/C system in the 2005–07 Chevrolet Suburban. All parts must be those OE-specified for one model year system and no parts may be eliminated or bypassed from the chosen system, or reproduced by a non-OE source. No parts may be added and/or relocated from the OE position in the 2005–07 Suburban. No parts may be modified in any way that could affect system performance for testing under this standard, except adding refrigerant line bends and/or loops to make the system more compact. Reducing the total length of the lines, however, is not permitted. The fixture system shall be powered by an electric motor, run at a speed not to exceed 2000 rpm, and for this test option, no system warm-up or equivalent procedure may be used. The certifying laboratory shall maintain records of all parts purchased, including invoices and payments. The assembly of the parts shall, as an outside-the-vehicle package, duplicate the OE system and its routing, including bends, except for permitted additions of bends and/or loops in refrigerant lines. Aside from the absence of engine operation and the limitations posed by the standard and the use of the electric motor, the test shall otherwise be the same as the test on the Suburban, including test temperature.

[72 FR 63495, Nov. 9, 2007]

APPENDIX D TO SUBPART B OF PART 82—
SAE J2810 STANDARD FOR RECOVERY
ONLY EQUIPMENT FOR HFC-134a RE-
FRIGERANT

FOREWORD

This Appendix establishes the specific minimum equipment requirements for the recovery of HFC-134a that has been directly removed from, motor vehicle air-conditioning systems.

1. Scope

The purpose of this SAE Standard is to provide minimum performance and operating feature requirements for the recovery of HFC-134a (R-134a) refrigerant to be returned to a refrigerant reclamation facility that will process it to the appropriate ARI 700 Standard or allow for recycling of the recovered refrigerant to SAE J2788 specifications by using SAE J2788-certified equipment. It is not acceptable that the refrigerant removed from a mobile air-conditioning (A/C) system with this equipment be directly returned to a mobile A/C system.

This information applies to equipment used to service automobiles, light trucks, and other vehicles with similar HFC-134a (R-134a) A/C systems.

1.1 Improved refrigerant recovery equipment is required to ensure adequate refrigerant recovery to reduce emissions and provide for accurate recharging of mobile air conditioning systems. Therefore, 12 months following the publication date of this standard, it supersedes SAE J1732.

2. References

2.1 Applicable Publications

The following publications form a part of the specification to the extent specified herein. Unless otherwise indicated, the latest revision of SAE publications shall apply.

2.1.1 SAE Publications

Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), <http://www.sae.org>.

SAE J639 Safety Standards for Motor Vehicle Refrigerant Vapor Compressions Systems.

SAE J1739 Potential Failure Mode and Effects Analysis in Design (Design FMEA) and Potential Failure Mode and Effects Analysis in Manufacturing and Assembly Processes (Process FMEA) and Effects Analysis for Machinery (Machinery FMEA).

SAE J1771 Criteria for Refrigerant Identification Equipment for Use with Mobile Air-Conditioning Systems.

SAE J2196 Service Hose for Automotive Air Conditioning.

SAE J2296 Retest of Refrigerant Container.

SAE J2788 HFC-134a (R-134a) Recovery/Recycling Equipment and Recovery/Recycling/Recharging for Mobile Air-Conditioning Systems.

2.1.2 ARI Publication

Available from Air-Conditioning and Refrigeration Institute, 4100 North Fairfax Drive, Suite 200, Arlington, VA 22203, Tel: 703-524-8800, <http://www.ari.org>.

ARI 700 Specifications for Fluorocarbon Refrigerants.

2.1.3 CGA Publication

Available from Compressed Gas Association, 4221 Walney Road, 5th Floor, Chantilly, VA 20151-2923, Tel: 703-788-2700, <http://www.cganet.com>.

CGA S-1.1 Pressure Relief Device Standard Part 1—Cylinders for Compressed Gases.

2.1.4 DOT Specification

Available from the Superintendent of Documents, U.S. Government Printing Office, Mail Stop: SSOP, Washington, DC 20402-9320.

Pt. 82, Subpt. B, App. D

40 CFR Ch. I (7-1-24 Edition)

CFR 49, Section 173.304 Shippers—General Requirements for Shipments and Packagings.

2.1.5 UL Publication

Available from Underwriters Laboratories Inc., 333 Pfingsten Road, Northbrook, IL 60062-2096, Tel: 847-272-8800, <http://www.ul.com>.

UL 1769 Cylinder Valves.

3. Specifications and General Description

3.1 The equipment must be able to recover (extract) HFC-134a (R-134a) refrigerant from a mobile A/C system per the test procedure of sections 7 and 8.

3.2 The equipment shall be suitable for use in an automotive service garage environment as defined in 6.8.

3.3 Equipment Certification

The equipment shall be certified by an EPA-listed laboratory to meet this standard. SAE J2810.

3.4 Label Requirements

The equipment shall have a label with bold type, minimum 3 mm high, saying "Design Certified by (certifying agent, EPA listed laboratory) to meet SAE J2810 for use only with HFC-134a (R-134a). If it is to be re-used in an A/C system, the refrigerant recovered with this equipment must be processed to the appropriate ARI 700 specifications or to specifications by using equipment certified to perform to SAE J2788."

3.5 SAE J1739

Potential Failure Mode and Effects Analysis in Design (Design FMEA), Potential Failure Mode and Effects Analysis in Manufacturing and Assembly Processes (Process FMEA), and Potential Failure Mode and Effects Analysis for Machinery (Machinery FMEA) shall be applied to the design and development of service equipment.

4. Safety Requirements

4.1 The equipment must comply with applicable federal, state, and local requirements on equipment related to the handling of HFC-134a (R-134a) material. Safety precautions or notices, labels, related to the safe operation of the equipment shall also be prominently displayed on the equipment and should state "CAUTION—SHOULD BE OPERATED ONLY BY CERTIFIED PERSONNEL." The safety identification shall be located on the front near the controls.

4.2 The equipment must comply with applicable safety standards for the electrical and mechanical systems.

5. Operating Instructions

5.1 The equipment manufacturer must provide operating instructions that include information required by SAE J639, necessary maintenance procedures, and source information for replacement parts and repair.

5.1.1 The instruction manual shall include the following information on the lubricant removed. Only new lubricant, as identified by the system manufacturer, should be replaced in the mobile A/C system. Removed lubricant from the system and/or the equipment shall be disposed of in accordance with the applicable federal, state, and local procedures and regulations.

5.2 The equipment must prominently display the manufacturer's name, address, the type of refrigerant it is designed to extract (R-134a), a service telephone number, and any items that require maintenance or replacement that affect the proper operation of the equipment. Operation manuals must cover information for complete maintenance of the equipment to assure proper operation.

5.3 The equipment manufacturer shall provide a warning in the instruction manual regarding the possibility of refrigerant contamination from hydrocarbons, leak sealants and refrigerants other than R-134a in the mobile A/C system being serviced.

5.4 Recovery equipment having refrigerant identification equipment shall meet the requirements of SAE J1771.

5.5 Recovery equipment not having refrigerant identification capability shall have instructions warning the technician that failure to verify that the system contains only R-134a potentially exposes him or her to danger from flammable refrigerants and health hazards from toxic refrigerants. The instructions also shall alert to possible contamination problems to the recovery equipment from sealants and refrigerants other than R-134a, and to the fact that a refrigerant other than R-134a would require special handling by someone with specific expertise and equipment.

6. Function Description

6.1 The equipment must be capable of continuous operation in ambient temperatures of 10 °C (50 °F) to 49 °C (120 °F). Continuous is defined as completing recovery operation with no more than a brief reset between servicing vehicles, and shall not include time delays for allowing a system to outgas (which shall be part of the recovery period provided by this standard).

6.1.1 The equipment shall demonstrate ability to recover a minimum of 95.0% of the refrigerant from the test vehicle in 30.0 minutes or less, without prior engine operation (for previous eight hours minimum), external heating or use of any device (such as shields, reflectors, special lights, etc.), which could heat components of the system.

The recovery procedure shall be based on a test at 21 °C to 24 °C (70 °F to 75 °F) ambient temperature. The test system for qualifying shall be a 1.4 kg (3.0 lbs) capacity orifice tube/accumulator system in a 2005–07 Chevrolet Suburban with front and rear A/C or the test option described in section 9.

6.1.2 The equipment shall demonstrate ability to recover a minimum of 85% of the refrigerant from the test vehicle or system of 6.1.1. in 30.0 minutes or less, at an ambient temperature of 10 °C to 13 °C (50 °F to 55 °F), subject to the same restrictions regarding engine operation and external heating.

6.1.3 During recovery operation, the equipment shall provide overfill protection so that the liquid fill of the storage container does not exceed 80% of the tank's rated volume at 21 °C (70 °F). This will ensure that the container meets Department of Transportation (DOT) Standard, CFR Title 49, section 173.304 and the American Society of Mechanical Engineers.

6.1.4 Portable refillable tanks or containers used in conjunction with this equipment must be labeled "HFC-134a (R-134a)" and meet applicable Department of Transportation (DOT) or Underwriters Laboratories (UL) Standards, and incorporate fittings per SAE J2197.

6.1.5 The cylinder valves shall comply with the standard for cylinder valves UL 1769.

6.1.6 The pressure relief device shall comply with the Pressure Relief Device Standard Part 1—Cylinders for Compressed Gases CGA Pamphlet S-1.1.

6.1.7 The tank assembly shall be marked to indicate the first retest date, which shall be five years from the date of manufacture. The marking shall indicate that retest must be performed every subsequent five years. SAE J2296 provides an inspection procedure. The marking shall be in letters at least 6 mm (0.25 in) high. If ASME tanks, as defined in UL-1963, are used, they are exempt from the retest requirements.

6.2 If the marketer permits use of a refillable refrigerant tank, a method must be provided (including any necessary fittings) for transfer to a system that ensures proper handling (recycling or other, environmentally-legal disposal).

Restricting the equipment to use of non-refillable tanks eliminates compliance with this provision.

6.3 Prior to testing under this standard, the equipment must be preconditioned with a minimum of 13.6 kg of the standard contaminated HFC-134a (R-134a) at an ambient of 21 °C before starting the test cycle. Sample amounts are not to exceed 1.13 kg with sample amounts to be repeated every 5 min. The test fixture shown in Figure 1 shall be operated at 21 °C. Contaminated HFC-134a (R-134a) samples shall be processed at ambient temperatures of 10 °C and 49 °C (50 °F to

120 °F), without the equipment shutting down due to any safety devices employed in this equipment.

6.3.1 Contaminated HFC-134a (R-134a) sample shall be standard contaminated HFC-134a (R-134a) refrigerant, 13.6 kg sample size, consisting of liquid HFC-134a (R-134a) with 1300 ppm (by weight) moisture at 21 °C (70 °F) and 45 000 ppm (by weight) of oil (polyalkylene glycol oil with 46–160 cst viscosity at 40 °C) and 1000 ppm by weight of noncondensable gases (air).

6.3.2 Portable refillable containers used in conjunction with this equipment must meet applicable DOT Standards. The color of the container must be blue with a yellow top to indicate the container holds used HFC-134a (R-134a) refrigerant. The container must be permanently marked on the outside surface in black print at least 20 mm high, "CONTAMINATED HFC-134a (R-134a)—DO NOT USE, MUST BE REPROCESSED."

Figure 1—Test Fixture

6.3.3 The portable refillable container shall have a ½ in ACME thread.

6.4 Additional Storage Tank Requirements.

6.4.1 The cylinder valve shall comply with UL 1769.

6.4.2 The pressure relief device shall comply with CGA Pamphlet S-1.1.

6.5 All flexible hoses must meet SAE J2196 for service hoses.

6.6 Service hoses must have shutoff devices located at the connection points to the system being serviced to minimize introduction of noncondensable gases into the recovery equipment during connection and the release of the refrigerant during disconnection.

6.7 The equipment must be able to separate the lubricant from recovered refrigerant and accurately indicate the amount removed from the simulated automotive system during processing in 20 mL (0.7 fl oz) units.

6.7.1 The purpose of indicating the amount of lubricant removed is to ensure that a proper amount of new lubricant is returned to the mobile A/C system for compressor lubrication, if the system is to be charged with equipment meeting SAE J2788.

6.7.2 Refrigerant dissolved in this lubricant must be accounted for to prevent lubricant overcharge of the mobile A/C system.

6.8 The equipment must be capable of continuous operation in ambient temperatures of 10 °C to 49 °C (50 °F to 120 °F) and comply with 6.1 to 6.4 of this standard.

6.9 For test validation, the equipment is to be operated according to the manufacturer's instructions.

7. Test Procedure A at 21 °C to 24 °C (70 °F to 75 °F).

The test vehicle (2005–2007 Chevrolet Suburban with rear A/C system—1.4 kg/ 3.0 lb) or laboratory fixture per section 10.5 of SAE

J2788, shall be prepared as for SAE J2788, section 10.3, following Steps 1, 2, 3, 4, and then the following:

7.1 Using a machine certified to SAE J2788 and with the machine on a platform scale with accuracy to within plus/minus 3.0 grams at the weight of the machine, charge the system to the vehicle manufacturer's recommended amount of refrigerant (1.4 kg–3.0 lb). The actual charge amount per the reading on the platform scale shall be used as the basis for the recovery efficiency of the recovery-only machine being tested to this standard. Run the engine (or operate test fixture with electric motor) for up to 15 minutes at up to 2000 rpm to circulate oil and refrigerant. The system then must rest for eight hours.

7.2 Place the recovery machine on the platform scale and record the weight with the hoses draped over the machine. Ambient temperature shall be within the range of 21 °C to 24 °C (70 °F to 75 °F) for this test, which shall be performed without the immediately prior engine operation permitted by SAE J2788, Section 10.3, Step No.1. The only permitted engine operation is as specified in 7.1.

7.3 Start the timer. Connect the service hoses to the system of the test vehicle and perform the recovery per the equipment manufacturer's instructions. The vehicle system's service valve cores must remain in the fittings for this procedure.

7.4 When recovery is completed, including from the service hoses if that is part of the recommended procedure, disconnect the hoses and drape over the machine. Stop the timer. The elapsed time shall be no more than 30 minutes.

7.5 Remove the oil reservoir, empty and reinstall. The platform scale shall indicate that a minimum of 95.0% of the refrigerant has been recovered, based on the charge amount indicated by the platform scale. If the machine has recovered the minimum of 95.0% within the 30.0 minutes, the next test shall be performed. If it fails this test, the marketer of the equipment must document changes to the equipment to upgrade performance before a retest is allowed. If it passes, the laboratory can proceed to Test Procedure B–10 °C to 13 °C (50 °F to 55 °F).

8. Test Procedure B at 10 °C to 13 °C (50 °F to 55 °F).

The test vehicle (2005–2007 Chevrolet Suburban front/rear A/C system (1.4 kg/3.0 lb) or test fixture per section 10.5 of SAE J2788, shall be prepared as per 7.0 and 7.1 of this standard, and then the following:

8.1 Place the recovery machine on the platform scale and record the weight with the hoses draped over the machine.

Ambient temperature at this time shall be no higher than 10 °C to 13 °C (50 °F to 55 °F).

8.2 Start the timer. Connect the service hoses to the system of the test vehicle and perform the recovery per the equipment

manufacturer's instructions. This also shall be performed without the immediately prior engine operation permitted by SAE J2788, section 10.4, Step No. 1. The vehicle system's service valve cores must remain in the fittings for this procedure.

8.3 When recovery is completed, including from the service hoses if that is part of the recommended procedure, disconnect the hoses and drape over the machine. Stop the timer. The elapsed time shall be no more than 30 minutes.

8.4 Remove the oil reservoir, empty and reinstall. The platform scale shall indicate that a minimum of 85.0% of the refrigerant has been recovered, based on the charge amount indicated by the platform scale. If the machine has recovered the minimum of 85.0% within the 30 minutes, it has passed the test procedure and if it meets all other requirements of this standard, it is certified.

9. Test Option

As in SAE J2788, Section 10.5, as an alternative to a 2005–2007 Chevrolet Suburban with rear A/C (1.4 kg–3.0 lb) system, a laboratory test fixture may be used to certify to SAE J2810 the fixture must be composed entirely of all the original equipment parts of a single model year for the 1.4 kg (3.0 lb) capacity system. All parts must be those OE-specified for one model year system and no parts may be eliminated or bypassed from the chosen system or reproduced from a non-OE source. No parts may be added and/or relocated from the OE position in the 2005–07 Suburban. No parts may be modified in any way that could affect system performance for testing under this standard, except adding refrigerant line bends and/or loops to make the system more compact. Reducing the total length of the lines, however, is not permitted.

The fixture systems for this standard shall not be powered by an electric motor during recovery, although a motor can be used, run at a speed not to exceed 2000 rpm, as part of the preparatory process, including installation of the charge.

[73 FR 34647, June 18, 2008]

APPENDIX E TO SUBPART B OF PART 82— THE STANDARD FOR AUTOMOTIVE REFRIGERANT RECYCLING EQUIPMENT INTENDED FOR USE WITH BOTH CFC-12 AND HFC-134a

SAE J2211, Recommended Service Procedure for the Containment of HFC-134a, as set forth under Appendix C of this subpart, and SAE J1989, Recommended Service Procedure for the Containment of CFC-12, as set forth under Appendix A of this subpart, also apply to this Appendix E of this subpart.

SAE J1770, issued December, 1995.

Environmental Protection Agency

Pt. 82, Subpt. B, App. E

AUTOMOTIVE REFRIGERANT RECYCLE EQUIPMENT INTENDED FOR USE WITH BOTH CFC-12 AND HFC-134a

Foreword

The purpose of this standard is to establish specific minimum equipment requirements for automotive refrigerant recycling equipment intended for use with both CFC-12 and HFC-134a in a common refrigerant circuit. Establishing such specifications will assure that this equipment does not cross contaminate refrigerant above specified limits when used under normal operating conditions.

1. Scope

The purpose of this standard is to establish the specific minimum equipment intended for use with both CFC-12 and HFC-134a in a common refrigerant circuit that has been directly removed from, and is intended for reuse in, mobile air-conditioning (A/C) systems. This standard does not apply to equipment used for CFC-12 and HFC-134a having a common enclosure with separate circuits for each refrigerant.

2. References

2.1 Applicable Documents—The following publications form a part of this specification to the extent specified. The latest issue of SAE publications shall apply.

2.1.1 SAE Publications—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J2099—Standard of Purity for Recycled HFC-134a for Use in Mobile Air-Conditioning Systems

SAE 1991—Standard of Purity for Use in Mobile Air-Conditioning Systems

SAE J2196—Service Hoses for Automotive Air-Conditioning

SAE J2197—Service Hose Fittings for Automotive Air-Conditioning

SAE J2210—HFC-134a (R-134a) Recycling Equipment for Mobile A/C Systems

SAE J1990—Extraction and Recycling Equipment for Mobile A/C Systems

2.1.2 Compressed Gas Association (CGA) Publications—Available from CGA, 1235 Jefferson Davis Highway, Arlington, VA 22202.

CGA Pamphlet S-1.1—Pressure Relief Device Standard

Part 1—Cylinders for Compressed Gases

2.1.3 DOT Publications—Available from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402

2.1.4 UL Publications—Available from Underwriters Laboratories, 333 Pfingsten Road, Northbrook, IL 60062-2096.

UL 1769—Cylinder Valves

UL 1963—Refrigerant Recovery/Recycling Equipment

3. Specification and General Description

3.1 The equipment shall be suitable for use in an automotive service garage environment and be capable of continuous operation in ambients from 10 to 49 °C.

3.2 The equipment must be certified that it meets this specification by Underwriters Laboratories Inc. (UL), or by an equivalent Nationally Recognized Testing Laboratory (NRTL).

3.3 The equipment shall have a label which states "Design Certified by (Certifying Agent) to meet SAE J1770 for recycling CFC-12 and HFC-134a using common refrigerant circuits", in bold-type letters a minimum of 3 mm in height.

4. Equipment Requirements

4.1 General

4.1.1 The equipment shall be capable of preventing cross contamination to the level required by Section 9.2.1.G before an operation involving a different refrigerant can begin. The equipment must prevent initiation of the recovery operation if the equipment is not set up properly.

4.1.2 If an operator action is required to clear the unit prior to reconnecting for a different refrigerant, the equipment shall be provided with a means which indicates which refrigerant was last processed.

4.1.3 Means shall be provided to prevent recovery from both an CFC-12 and HFC-134a mobile air conditioning system concurrently.

4.1.4 Transfer of recycled refrigerant—Recycled refrigerant for recharging and transfer shall be taken from the liquid phase only.

4.2 Seat Leakage Test

4.2.1 Valves, including electrically operated solenoid valves, that are used to isolate CFC-12 and HFC-134a refrigerant circuits, shall have a seat leakage rate not exceeding 15 g/yr ($\frac{1}{2}$ oz/yr) before and after 100,000 cycles of operation. This Endurance Test shall be conducted with HFC-134a at maximum operating pressure as determined by sections 8.1 and 8.2. The Seat Leakage Test shall be performed at 1.5 times this pressure at an ambient of 24 °C.

4.3 Interlocks

4.3.1 Electrical interlock devices used to prevent cross contamination of refrigerant shall be operated for 100,000 cycles and there shall be no failure that would permit cross contamination of refrigerant. Solid state inter lock devices shall comply with the Transient Overvoltage Test and the Fast Transient (Electric Noise) Test contained in the Standard for Tests for Safety Related Controls Employing Solid-State Devices, UL 991.

4.4 Noncondensable Gases

4.4.1 The equipment shall either automatically purge noncondensables (NCGs) if

the acceptable level is exceeded or incorporate a device that indicates to the operator the NCG level has been exceeded. A pressure gauge used to indicate an NCG level shall be readable in 1 psig increments. NCG removal must be part of the normal operation of the equipment and instructions must be provided to enable the task to be accomplished within 30 minutes.

4.4.2 Refrigerant loss from noncondensable gas purging, oil removal, and refrigerant clearing shall not exceed more than 5 percent by weight of the total amount of refrigerant through the equipment as detailed in Sections 8.1, 8.2, and 9.2.

4.5 Filter

4.5.1 A 15 micron filter, or other equivalent means, to remove particulates of 15 micrometers spherical diameter or greater shall be located before any manual electrically operated valves that may cause cross contamination.

4.6 Moisture and Acid

4.6.1 The equipment shall incorporate a desiccant package that must be replaced before saturated with moisture, and whose acid capacity is at least 5% by weight of the dry desiccant.

4.6.2 The equipment shall be provided with a moisture detection means that will reliably indicate when moisture in the HFC-134a exceeds 50 ppm, or in the CFC-12 exceeds 15 ppm, and requires the filter/drier replacement.

5. Operating Instructions

5.1 The equipment manufacturer must provide operating instructions, including proper attainment of vehicle system vacuum (*i.e.*, when to stop the extraction process, and also to stop the extraction process if it is noticed that the A/C system being serviced has a leak), filter/desiccant replacement, and purging of noncondensable gases (air). The instructions shall indicate that the correct sequence of operation be followed so that the equipment can properly remove contaminants to the acceptable level. Also to be included are any other necessary maintenance procedures, source information for replacement parts and repair, and safety precautions.

5.2 The equipment must prominently display the manufacturer's name, address, the type of refrigerant (CFC-12 and HFC-134a), a service telephone number, and the part number for the replacement filter/drier. Operation manuals must cover information for complete maintenance of the equipment to assure proper operation.

6. Safety Requirements

6.1 The equipment must comply with applicable federal, state, and local requirements on equipment related to handling CFC-12 and HFC-134a material. Safety pre-

cautions or notices related to the safe operation of the equipment shall be prominently displayed on the equipment and should also state "CAUTION—SHOULD BE OPERATED BY QUALIFIED PERSONNEL".

6.2 HFC-134a has been shown to be non-flammable at ambient temperature and atmospheric pressure. The following statement shall be in the operating manual: "Caution: HFC-134a service equipment or vehicle A/C systems should not be pressure tested or leak tested with compressed air. Some mixtures of air and HFC-134a have been shown to be combustible at elevated pressures (when contained in a pipe or tank). These mixtures may be potentially dangerous, causing injury or property damage. Additional health and safety information may be obtained from refrigerant and lubricant manufacturers."

7. Functional Description

7.1 General

7.1.1 The equipment must be capable of ensuring recovery of the CFC-12 and HFC-134a from the system being serviced, by reducing the system to a minimum of 102 mm of mercury below atmospheric pressure (*i.e.*, vacuum).

7.1.2 The equipment must be compatible with leak detection material that may be present in the mobile A/C system.

7.2 Shut Off Device

7.2.1 To prevent overcharge, the equipment must be equipped to protect the tank used to store the recycled refrigerant with a shutoff device and a mechanical pressure relief valve.

7.3 Storage Tanks

7.3.1 Portable refillable tanks or containers shall be supplied with this equipment and must be labeled "HFC-134a" or "CFC-12" as appropriate, meet applicable Department of Transportation (DOT) or NRTL's Standards and be adaptable to existing refrigerant service and charging equipment.

7.3.2 The cylinder valve shall comply with the Standard for Cylinder Valves, UL 1769.

7.3.3 The pressure relief device shall comply with the Pressure Relief Device Standard Part 1—Cylinders for Compressed Gases, CGA Pamphlet S-1.1.

7.3.4 The tank assembly shall be marked to indicate the first retest date, which shall be 5 years after the date of manufacture. The marking shall indicate that retest must be performed every subsequent 5 years. The marking shall be in letters at least 6 mm high.

7.4 Overfill Protection

7.4.1 During operation, the equipment must provide overfill protection to assure that during filling or transfer, the tank or storage container cannot exceed 80% of volume at 21.1 °C of its maximum rating as defined by DOT standards, 49 CFR 173.304 and American Society of Mechanical Engineers.

7.5 Hoses and Connections

7.5.1 Separate inlet and outlet hoses with fittings and separate connections shall be provided for each refrigerant circuit.

7.5.2 All flexible hoses and fittings must meet SAE J2196 (for CFC-12) and SAE J2197 (for HFC-134a).

7.5.3 Service hoses must have shutoff devices located within 30 cm of the connection point to the system being serviced.

7.6 Lubricant Separation

7.6.1 The equipment must be able to separate the lubricant from the removed refrigerant and accurately indicate the amount of lubricant removed during the process, in 30 mL (1 fl oz) units. Refrigerant dissolves in lubricant and, as a result, increases the volume of the recovered lubricant sample. This creates the illusion that more lubricant has been recovered than actually has been. The equipment lubricant measuring system must take into account such dissolved refrigerant removed from the A/C system being serviced to prevent overcharging the vehicle system with lubricant.

(NOTE: Use only new lubricant to replace the amount removed the recycling process. Used lubricant should be discarded per applicable federal, state and local requirements.)

7.6.2 The equipment must be provided with some means, such as a lockout device, which will prevent initiation of the recovery operation after switching to the other refrigerant, if the lubricant has not been drained from the oil separator.

8. Testing

8.0 Equipment shall be tested in sequence as noted in sections 8.1, 8.2 and 9.2. The filter/drier may be replaced only as noted by section 4.6.2.

8.1 CFC-12 Recycling Cycle

8.1.1 The maximum operating pressure of the equipment shall be determined when recycling CFC-12 while conducting the following tests. This pressure is needed for the Seat Leakage Test, Section 4.2.

8.1.2 The equipment must be preconditioned with 13.6 kg of the standard contaminated CFC-12 (see section 8.1.2a) at an ambient of 21 °C before starting the test cycle. Sample amounts shall be 1.13 kg with sample amounts to be repeated every 5 minutes. The sample method fixture, defined in Figure 1 to Appendix A, shall be operated at 21 °C.

8.1.2a Standard contaminated CFC-12 refrigerant shall consist of liquid CFC-12 with 100 ppm (by weight) moisture at 21 °C and 45,000 ppm (by weight) mineral oil 525 suspension viscosity nominal and 770 ppm by weight of noncondensable gases (air).

8.1.3 The high moisture contaminated sample shall consist of CFC-12 vapor with 1000 ppm (by weight) moisture.

8.1.4 The high oil contaminated sample shall consist of CFC-12 with 200,000 ppm (by weight) mineral oil 525 suspension viscosity nominal.

8.1.5 After preconditioning as stated in section 8.1.2, the test cycle is started, processing the following contaminated samples through the equipment.

A. 13.6 kg (1.13 kg per batch) of standard contaminated CFC-12.

B. 1 kg of high oil contaminated CFC-12.

C. 4.5 kg (1.13 kg per batch) of standard contaminated CFC-12.

D. 1 kg of high moisture contaminated CFC-12.

8.1.6 The CFC-12 is to be cleaned to the minimum purity level, as defined in SAE J1991, with the equipment operating in a stable ambient of 10, 21, and 49 °C and processing the samples as defined in section 8.1.5.

8.2 HFC-134a Recycling Cycle

8.2.1 The maximum operating pressure of the equipment shall be determined when recycling HFC-134a while conducting the following tests. This pressure is needed for the Seat Leakage Test, Section 4.2.

8.2.2 The equipment must be preconditioned by processing 13.6 kg of the standard contaminated HFC-134a (see section 8.2.2a) at an ambient of 21 °C before starting the test cycle. 1.13 kg samples are to be processed at 5 minute intervals. The test fixture shown in Figure 1 to Appendix A shall be operated at 21 °C.

8.2.2a The standard contaminated refrigerant shall consist of liquid HFC-134a with 1300 ppm (by weight) moisture (equivalent to saturation at 38°[100 °F]), 45,000 ppm (by weight) HFC-134a compatible lubricant, and 1000 ppm (by weight) of noncondensable gases (air).

8.2.2b The HFC-134a compatible lubricant referred to in section 8.2.2a shall be a polyalkylene glycol based synthetic lubricant or equivalent, which shall contain no more than 1000 ppm by weight of moisture.

8.2.3 Following the preconditioning procedure per section 8.2.2, 18.2 kg of standard contaminated HFC-134a are to be processed by the equipment at each stable ambient temperature of 10, 21, and 49 °C.

8.2.4 The HFC-134a is to be cleaned to the purity level, as defined in SAE J2099.

9. Refrigerant Cross Contamination Test

9.1 General

9.1.1 For test validation, the equipment is to be operated according to the manufacturer's instruction.

9.1.2 The equipment shall clean the contaminated CFC-12 refrigerant to the minimum purity level as defined in Appendix A, when tested in accordance with the requirements in section 8.1.

9.1.3 The equipment shall clean the contaminated HFC-134a refrigerant to the purity

level defined in Appendix C, when tested in accordance with the requirements in section 8.2.

9.2 Test Cycle

9.2.1 The following method shall be used after the tests and requirements in Sections 8.1 and 8.2, respectively, are completed. Following the manufacturer's instructions, the equipment shall be cleared of HFC-134a, prior to beginning step A. The only refrigerant used for this is noted in steps A, C, and E of section 9.2.1. The test fixture shown in Figure 1 to Appendix A shall be used and the test shall be conducted at 10, 21, and 49 °C ambients.

- A. A 1.13 kg standard contaminated sample of CFC-12 (see section 8.1.2a) shall be processed by the equipment.
- B. Follow manufacturer's instructions to clear the equipment of CFC-12 before processing HFC-134a.
- C. Process a 1.13 kg, standard contaminated sample of HFC-134a (see section 8.2.2a) through the equipment.
- D. Follow manufacturer's instructions to clear the equipment of HFC-134a before processing CFC-12.
- E. Process a 1.13 kg standard contaminated sample of CFC-12 (see section 8.1.2a) through the equipment.
- F. Follow manufacturer's instructions to clear the equipment of CFC-12.
- G. The amount of cross contaminated refrigerant, as determined by gas chromatography, in samples processed during steps C and E of section 9.2.1., shall not exceed 0.5 percent by weight.

10. Sample Analysis

10.1 General

10.1.1 The processed contaminated samples shall be analyzed according to the following procedure.

10.2 Quantitative Determination of Moisture

10.2.1 The recycled liquid phase sample of refrigerant shall be analyzed for moisture content via Karl Fischer coulometer titration or an equivalent method. The Karl Fischer apparatus is an instrument for precise determination of small amounts of water dissolved in liquid and/or gas samples.

10.2.2 In conducting the test, a weighed sample of 30 to 130 g is vaporized directly into the Karl Fischer anolyte. A coulometer titration is conducted and the results are calculated and displayed as parts per million moisture (weight).

10.3 Determination of Percent Lubricant

10.3.1 The amount of lubricant in the recycled sample of refrigerant/lubricant is to be determined by gravimetric analysis.

10.3.2 Following venting of noncondensable, in accordance with the manufacturer's operating instructions, the refrigerant container shall be shaken for 5 minutes prior to extracting samples for test.

10.3.3 A weighed sample of 175 to 225 g of liquid refrigerant/lubricant is allowed to evaporate at room temperature. The percent lubricant is to be calculated from the weight of the original sample and the residue remaining after the evaporation.

10.4 Noncondensable Gas

10.4.1 The amount of noncondensable gas is to be determined by gas chromatography. A sample of vaporized refrigerant liquid shall be separated and analyzed by gas chromatography. A Propak Q column at 130 °C and a hot wire detector may be used for analysis.

10.4.2 This test shall be conducted on liquid phase samples of recycled refrigerant taken from a full container as defined in 7.4 within 30 minutes following the proper venting of noncondensable gases.

10.4.3 The samples shall be shaken for at least 15 minutes prior to testing while at a temperature of 24 °C $\pm$ 2.8 °C.

10.5 Refrigerant Cross Contamination

10.5.1 The amount of cross contamination of CFC-12 in HFC-134a or HFC-134a in CFC-12 shall not exceed 0.5 percent by weight as determined by gas chromatography. A sample of vaporized refrigerant liquid shall be separated and analyzed by gas chromatography. A 1% SP-1000 on Carbopack B (60/80 mesh) column may be used for the analysis.

[62 FR 68053, Dec. 30, 1997]

APPENDIX F TO SUBPART B OF PART 82— STANDARD FOR RECOVER-ONLY EQUIPMENT THAT EXTRACTS A SINGLE, SPECIFIC REFRIGERANT OTHER THAN CFC-12, HFC-134A, OR R- 1234YF

Foreword

These specifications are for equipment that recovers, but does not recycle, any single, specific automotive refrigerant other than CFC-12, HFC-134a, or HFO-1234yf, including a blend refrigerant.

1. Scope

The purpose of this standard is to provide equipment specifications for the recovery of any single, specific refrigerant other than CFC-12, HFC-134a, or HFO-1234yf, including a blend refrigerant, which is either (1) to be returned to a refrigerant reclamation facility that will process the refrigerant to ARI Standard 700-93 or equivalent new product specifications at a minimum, or (2) to be recycled in approved refrigerant recycling equipment, or (3) to be destroyed. This standard applies to equipment used to service automobiles, light trucks, and other vehicles with similar air conditioning systems.

2. References

2.1 Applicable Documents—The following publications form a part of this specification

Environmental Protection Agency

Pt. 82, Subpt. B, App. F

to the extent specified. The latest issue of SAE publications shall apply.

2.1.1 SAE Publications—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001. SAE J639—Vehicle Service Coupling. SAE J2196—Service Hoses for Automotive Air-Conditioning (fittings modified)

2.1.2 ARI Publication—Available from Air Conditioning and Refrigeration Institute, 1501 Wilson Boulevard, Sixth Floor, Arlington, VA 22209. ARI 700-93—Specifications for Fluorocarbon Refrigerants.

2.1.3 Compressed Gas Association (CGA) Publications—Available from CGA, 1235 Jefferson Davis Highway, Arlington, VA 22202. CGA Pamphlet S-1.1—Pressure Relief Device Standard Part 1—Cylinders for Compressed Gases.

2.1.4 DOT Publications—Available from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

DOT Standard, 49 CFR 173.304—Shippers—General Requirements for Shipments and Packagings.

2.1.5 UL Publications—Available from Underwriters Laboratories, 333 Pfingsten Road, Northbrook, IL 60062-2096.

UL 1769—Cylinder Valves.

UL 1963—Refrigerant Recovery Recycling Equipment.

3. Specifications and General Description

3.1 The equipment must be able to extract from a mobile air conditioning system the refrigerant other than CFC-12, HFC-134a, or HFO-1234yf to which the equipment is dedicated.

3.2 The equipment shall be suitable for use in an automotive service garage environment as defined in section 6.8.

3.3 The equipment discharge or transfer fitting shall be unique to prevent the unintentional use of the extracted refrigerant for recharging auto air conditioners.

3.4 Equipment Certification—The equipment shall be certified by Underwriters Laboratories or an equivalent certifying laboratory to meet this standard.

3.5 Label Requirements—The equipment shall have a label "Designed Certified by (Company Name) to meet EPA requirements for use only with (the applicable refrigerant). The refrigerant from this equipment must be processed to ARI 700-93 specifications or equivalent new product specifications before reuse in a mobile air-conditioning system." The minimum letter size shall be bold type 3 mm in height.

4. Safety Requirements

4.1 The equipment must comply with applicable federal, state, and local requirements on equipment related to the handling of the applicable refrigerant material. Safety

precautions or notices or labels related to the safe operation of the equipment shall also be prominently displayed on the equipment and should state "CAUTION—SHOULD BE OPERATED BY CERTIFIED PERSONNEL." The safety identification shall be located on the front near the controls.

4.2 The equipment must comply with applicable safety standards for electrical and mechanical requirements.

5. Operating Instructions

5.1 The equipment manufacturer must provide operating instructions that include information equivalent to that required by SAE J1629, necessary maintenance procedures, and source information for replacement parts and repair.

5.1.1 The instruction manual shall include the following information on the lubricant removed: Only new lubricant, as identified by the system manufacturer, should be replaced in the air conditioning system. Removed lubricant from the system and/or the equipment shall be disposed of in accordance with the applicable federal, state, and local procedures and regulations.

5.2 The equipment must prominently display the manufacturer's name, address, the type of refrigerant it is designed to extract, a service telephone number, and any items that require maintenance or replacement that affect the proper operation of the equipment. Operation manuals must cover information for complete maintenance of the equipment to assure proper operation.

6.1 Functional Description

6.1 The equipment must be capable of ensuring removal of refrigerant from the system being serviced by reducing the system pressure to a minimum of 102 mm (4 in) of mercury below atmospheric pressure (*i.e.*, to a vacuum). To prevent system delayed outgassing, the unit must have a device that assures that the refrigerant has been recovered from the air-conditioning system.

6.1.1 Testing laboratory certification of the equipment capability is required which shall process contaminated refrigerant samples at specific temperatures.

6.2 The equipment must be preconditioned by processing 13.6 kg (30 lb) of the standard contaminated refrigerant at an ambient of 21 °C (70 °F) before starting the test cycle. Sample amounts are not to exceed 1.13 kg (2.5 lb) with sample amounts to be processed at 5 min. intervals. The test method fixture, depicted in Figure 1 to appendix A of this subpart, shall be operated at 21 °C (70 °F). Contaminated refrigerant samples shall be processed at ambient temperatures of 10 and 49 °C, without equipment shutting due to any safety devices employed in this equipment.

6.2.1 Standard contaminated refrigerant, 13.6 kg (30 lb) sample size, shall consist of

§ 82.60

liquid refrigerant with 1000 ppm (by weight) moisture at 21 °C and 45,000 ppm (by weight) of oil (total of one-third mineral oil 525 suspension nominal, one-third PAG with 100 cSt viscosity at 40 °C or equivalent, and one-third POE with 68 cSt viscosity at 40 °C or equivalent) and 1000 ppm by weight of non-condensable gases (air). Refrigerant shall be identified prior to the recovery process to $\pm 2\%$ of the original manufacturer's formulation submitted to, and accepted by, EPA under its Significant New Alternatives Policy program, with the exception that any flammable components shall be identified to $\pm 1\%$.

6.3 Portable refillable containers used in conjunction with this equipment must meet applicable DOT Standards.

6.3.1 The container color must be gray with a yellow top to identify that it contains used refrigerant. It must be permanently marked on the outside surface in black print at least 20 mm high "DIRTY [NAME OF REFRIGERANT]—DO NOT USE, MUST BE PROCESSED".

6.3.2 The portable refillable container shall have a unique thread connection for the specific refrigerant.

6.3.3 During operation, the equipment shall provide overfill protection to assure that the storage container liquid fill does not exceed 80% of the tank's rated volume at 21 °C per DOT Standard, 49 CFR 173.304, and the American Society of Mechanical Engineers.

6.4 Additional Storage Tank Requirements

6.4.1 The cylinder valve shall comply with UL 1769.

6.4.2 The pressure relief device shall comply with CGA Pamphlet S-1.1.

6.4.3 The container assembly shall be marked to indicate the first retest date, which shall be 5 years after date of manufacture. The marking shall indicate that retest must be performed every subsequent 5 years. The marking shall be in letters at least 6 mm high.

6.5 All flexible hoses must meet SAE J2196 for service hoses except that fittings shall be unique to the applicable refrigerant.

6.6 Service hoses must have shutoff devices located within 30 cm of the connection point to the system being serviced to minimize introduction of noncondensable gases into the recovery equipment during connection and the release of the refrigerant during disconnection.

6.7 The equipment must be able to separate the lubricant from the recovered refrigerant and accurately indicate the amount removed from the simulated automotive system during processing in 30 mL units.

6.7.1 The purpose of indicating the amount of lubricant is to ensure that a proper amount of new lubricant is returned to

40 CFR Ch. I (7–1–24 Edition)

the mobile air conditioning system for compressor lubrication.

6.7.2 Refrigerant dissolved in this lubricant must be accounted for to prevent system lubricant overcharge of the mobile air-conditioning system.

6.8 The equipment must be capable of continuous operation in temperatures of 10 to 49 °C and must comply with 6.1 and 6.2.

7. For test validation, the equipment is to be operated according to the manufacturer's instructions.

Application

The purpose of this standard is to provide equipment specifications for the recovery of any refrigerant other than CFC-12, HFC-134a, or HFO-1234yf for return to a refrigerant reclamation facility that will process it to AHRI Standard 700 (or for recycling in other EPA approved recycling equipment, in the event that EPA in the future designates a standard for equipment capable of recycling refrigerants other than CFC-12, HFC-134a, or HFO-1234yf).

Reference Section

SAE J639—Vehicle Service Coupling
SAE J2196—Service Hoses for Automotive Air-Conditioning
ARI 700-93—Specifications for Fluorocarbon Refrigerants
CGA Pamphlet S-1.1—Pressure Relief Device Standard Part 1—Cylinders for Compressed Gases
UL 1769—Cylinder Valves
49 CFR 173.304—Shippers—General Requirements for Shipment and Packagings
[62 FR 68055, Dec. 30, 1997, as amended at 86 FR 15596, Mar. 24, 2021]

Subpart C—Ban on Nonessential Products Containing Class I Substances and Ban on Nonessential Products Containing or Manufactured With Class II Substances

SOURCE: 58 FR 69675, Dec. 30, 1993, unless otherwise noted.

§ 82.60 Purpose.

The purpose of this subpart is to implement the requirements of sections 608 and 610 of the Clean Air Act as amended in 1990 on emission reductions and nonessential products.

§ 82.62 Definitions.

For purposes of this subpart:

Chlorofluorocarbon means any substance listed as Class I group I or Class

I group III in 40 CFR part 82, appendix A to subpart A.

Class II Substance means any substance designated as class II in 40 CFR part 82, appendix B to subpart A.

Commercial, when used to describe the purchaser of a product, means a person that uses the product in the purchaser's business or sells it to another person and has one of the following identification numbers:

- (1) A federal employer identification number;
- (2) A state sales tax exemption number;
- (3) A local business license number; or
- (4) A government contract number.

Consumer, when used to describe a person taking action with regard to a product, means the ultimate purchaser, recipient or user of a product.

Distributor, when used to describe a person taking action with regard to a product means:

- (1) The seller of a product to a consumer or another distributor; or
- (2) A person who sells or distributes that product in interstate commerce for export from the United States.

Foam Insulation Product, when used to describe a product containing or consisting of plastic foam, means a product containing or consisting of the following types of foam:

- (1) Closed cell rigid polyurethane foam;
- (2) Closed cell rigid polystyrene boardstock foam;
- (3) Closed cell rigid phenolic foam; and
- (4) Closed cell rigid polyethylene foam when such foam is suitable in shape, thickness and design to be used as a product that provides thermal insulation around pipes used in heating, plumbing, refrigeration, or industrial process systems.

Hydrochlorofluorocarbon means any substance listed as class II in 40 CFR part 82, appendix B to subpart A.

Initial Inventory means that the original product has completed all of its manufacturing processes and is ready for sale by the manufacturer. Products in initial inventory may be subsequently incorporated into another product by a different manufacturer after purchase. To continue selling

products after the effective date of the provisions, the manufacturer or distributor must be able to show, upon request by EPA, that the product was in fact manufactured, and thus placed into initial inventory prior to the effective date. Shipping forms, lot numbers, manufacturer date stamps or codes, invoices, or the like are normally kept records that could be maintained from the time the product was put into initial inventory and may be used to demonstrate when a product was placed in initial inventory.

Polyurethane Foam System means an item consisting of two transfer pumps that deliver ingredients (polyisocyanate or isocyanate from one side and a mixture including the blowing agent, catalysts, flame retardants, and/or stabilizers from the other side) to a metering/mixing device which allows the components to be delivered in the appropriate proportions.

Product means an item or category of items manufactured from raw or recycled materials which is used to perform a function or task.

Release means to emit into the environment during the manufacture, use, storage or disposal of a product.

Space Vehicles means a man-made device, either manned or unmanned, designed for operation beyond earth's atmosphere. This definition includes integral equipment such as models, mock-ups, prototypes, molds, jigs, tooling, hardware jackets, and test coupons. Also included is auxiliary equipment associated with test, transport, and storage, which through contamination can compromise the space vehicle performance.

[58 FR 69675, Dec. 30, 1993, as amended at 61 FR 64427, Dec. 4, 1996; 66 FR 57522, Nov. 15, 2001; 85 FR 15300, Mar. 17, 2020]

§ 82.64 Prohibitions.

(a) Effective February 16, 1993, no person may sell or distribute, or offer to sell or distribute, in interstate commerce any of the products identified as being nonessential in § 82.66(a).

(b) Effective February 16, 1993, no person may sell or distribute, or offer to sell or distribute, in interstate commerce any of the products specified in

§ 82.65

40 CFR Ch. I (7–1–24 Edition)

§ 82.66(b) to a person who does not provide proof of being a commercial purchaser, as defined under § 82.62.

(c) Effective January 17, 1994, no person may sell or distribute, or offer to sell or distribute, in interstate commerce any of the products identified as being nonessential in § 82.66(c) or § 82.66(d) except as permitted under § 82.65(g).

(d) Except as permitted under § 82.65, effective January 1, 1994, no person may sell or distribute, or offer for sale or distribution, in interstate commerce any product identified as being nonessential in § 82.70(a) or § 82.70(c).

(e) Except as permitted under § 82.65, effective January 1, 1994, no person may sell or distribute, or offer to sell or distribute, in interstate commerce any of the products specified in § 82.70(b) to a person who does not provide proof of being a commercial purchaser, as defined under § 82.62.

(f) Except as permitted under § 82.65(d), effective January 1, 1996, no person may sell or distribute, or offer for sale or distribution, in interstate commerce any product identified as being nonessential in § 82.70(c)(ii).

(g) It is a violation of this subpart to sell or distribute, or offer for sale or distribution, products effected by the provisions of § 82.68 if the seller knew or should have known that the purchaser was purchasing the product for a prohibited application.

(h) No person may sell or distribute, or offer to sell or distribute, in interstate commerce any of the products identified as being nonessential in § 82.66(f).

[58 FR 69675, Dec. 30, 1993, as amended at 85 FR 15300, Mar. 17, 2020]

§ 82.65 Temporary exemptions.

(a) Any person may sell or distribute, or offer to sell or distribute, in interstate commerce, at any time, any products specified as nonessential in § 82.70 which are manufactured and placed into initial inventory by December 31, 1993.

(b) Any person may sell or distribute, or offer to sell or distribute, in interstate commerce, at any time, any products specified as nonessential in § 82.70 which are manufactured and placed into initial inventory within the date

90 days after the effective date of any federal approvals required for product reformulation, where application for the required approval was timely and properly submitted to the approving federal agency prior to January 1, 1994.

(c)(1) Any person may sell or distribute or offer to sell or distribute, in interstate commerce, at any time, any products specified as nonessential in § 82.70 which are manufactured and placed into initial inventory within 45 days after the receipt of denial by any federal agency of an application for reformulation where initial application for the required approval was timely and properly submitted to the approving federal agency prior to January 1, 1994.

(2) If, within 45 days of receipt of a denial of an application for reformulation, a person submits a new viable application for federal approval of a reformulation, that person may continue to sell and distribute, or offer to sell and distribute until 45 days of denial of that application.

(d) Any person may sell or distribute, or offer to sell or distribute, in interstate commerce, at any time, any integral skin foam utilized to provide for motor vehicle safety in accordance with Federal Motor Vehicle Safety Standards, which are manufactured and placed into initial inventory prior to January 1, 1996.

(e) Any person selling or distributing, or offering to sell or distribute, any product specified in this section after January 1, 1994, or January 1, 1996 for paragraph (d) of this section, or after January 17, 1994 for any product specified in paragraph (g) of this section, must retain proof that such product was manufactured and placed into initial inventory before the relevant date specified in this section. Such proof may take the form of shipping forms, lot numbers, manufacturer date stamps, invoices or equivalent business records.

(f) Any person may sell or distribute, or offer to sell or distribute, in interstate commerce, any aircraft pesticide containing class I until an alternative aircraft pesticide containing class II is available in interstate commerce.

(g) Any person may sell or distribute, or offer to sell or distribute, in interstate commerce, at any time, any replacement part that was manufactured with, or contains a class I substance or was packaged in material that was manufactured with or contains a class I substance only if:

(1) The replacement part was manufactured for use in a single model of a product; and

(2) The replacement part and product model are no longer manufactured; and

(3) The replacement part was placed into initial inventory prior to April 16, 1992.

(h) Any person may sell or distribute, or offer to sell or distribute, in interstate commerce, at any time, any air-conditioning or refrigeration products specified as nonessential in § 82.66(e) that are manufactured and placed into initial inventory by January 14, 2002.

(i) Any person may sell or distribute, or offer to sell or distribute, in interstate commerce, at any time, any integral skin foam products manufactured with a Class I substance for use in commercial aviation and specified as nonessential in § 82.66(c) that are manufactured and placed into initial inventory by January 14, 2002.

[58 FR 69675, Dec. 30, 1993, as amended at 66 FR 57522, Nov. 15, 2001]

§ 82.66 Nonessential Class I products and exceptions.

The following products which release a Class I substance (as defined in 40 CFR part 82, appendix A to subpart A) are identified as being nonessential, and subject to the prohibitions specified under § 82.64—

(a) Any plastic party streamer or noise horn which is propelled by a chlorofluorocarbon, including but not limited to—

(1) String confetti;

(2) Marine safety horns;

(3) Sporting event horns;

(4) Personal safety horns;

(5) Wall-mounted alarms used in factories or other work areas; and

(6) Intruder alarms used in homes or cars.

(b) Any cleaning fluid for electronic and photographic equipment which contains a chlorofluorocarbon:

(1) Including but not limited to liquid packaging, solvent wipes, solvent sprays, and gas sprays; and

(2) Except for those sold or distributed to a commercial purchaser.

(c) Any plastic foam product which is manufactured with or contains a Class I substance; except any plastic foam product blown with CFC-11, but which contains no other Class I substances and where this product is used to provide thermal protection to external tanks for space vehicles;

(d) Any aerosol product or other pressurized dispenser, other than those banned in § 82.64(a) or § 82.64(b), which contains a chlorofluorocarbon,

(1) Including but not limited to household, industrial, automotive and pesticide uses,

(2) Except—

(i) Medical devices listed in 21 CFR 2.125(e);

(ii) Lubricants, coatings or cleaning fluids for electrical or electronic equipment, which contain CFC-11, CFC-12, or CFC-113 for solvent purposes, but which contain no other CFCs;

(iii) Lubricants, coatings or cleaning fluids used for aircraft maintenance, which contain CFC-11 or CFC-113 as a solvent, but which contain no other CFCs;

(iv) Mold release agents used in the production of plastic and elastomeric materials, which contain CFC-11 or CFC-113 as a solvent, but which contain no other CFCs, and/or mold release agents that contain CFC-12 as a propellant, but which contain no other CFCs;

(v) Spinnerette lubricant/cleaning sprays used in the production of synthetic fibers, which contain CFC-114 as a solvent, but which contain no other CFCs, and/or spinnerette lubricant/cleaning sprays which contain CFC-12 as a propellant, but which contain no other CFCs;

(vi) Document preservation sprays which contain CFC-113 as a solvent, but which contain no other CFCs, and/or document preservation sprays which contain CFC-12 as a propellant, but which contain no other CFCs, and which are used solely on thick books, books with coated or dense paper and tightly bound documents;

(e) Any air-conditioning or refrigeration appliance as defined in the Clean

§ 82.68

40 CFR Ch. I (7–1–24 Edition)

Air Act (CAA) 601(1) that contains a Class I substance used as a refrigerant; and

(f) Any polyurethane foam system that contains any CFC.

[58 FR 69675, Dec. 30, 1993, as amended at 66 FR 57522, Nov. 15, 2001; 85 FR 15300, Mar. 17, 2020]

§ 82.68 Verification and public notice requirements.

(a) Effective February 16, 1993, any person who sells or distributes any cleaning fluid for electronic and photographic equipment which contains a chlorofluorocarbon must verify that the purchaser is a commercial entity as defined in § 82.62. In order to verify that the purchaser is a commercial entity, the person who sells or distributes this product must request documentation that proves the purchaser's commercial status by containing one or more of the commercial identification numbers specified in § 82.62(b). The seller or distributor must have a reasonable basis for believing that the information presented by the purchaser is accurate.

(b) Effective February 16, 1993, any person who sells or distributes any cleaning fluid for electronic and photographic equipment which contains a chlorofluorocarbon must prominently display a sign where sales of such product occur which states: "It is a violation of federal law to sell, distribute, or offer to sell or distribute, any chlorofluorocarbon-containing cleaning fluid for electronic and photographic equipment to anyone who is not a commercial user of this product. The penalty for violating this prohibition can be up to \$25,000 per sale. Individuals purchasing such products must present proof of their commercial status in accordance with § 82.68(a)."

(c) Effective January 1, 1994, any person who sells or distributes any aerosol or pressurized dispenser of cleaning fluid for electronic and photographic equipment which contains a class II substance must verify that the purchaser is a commercial entity as defined in § 82.62(b). In order to verify that the purchaser is a commercial entity, the person who sells or distributes this product must request documentation that proves the purchaser's com-

mercial status by containing one or more of the commercial identification numbers specified in § 82.62(b).

(d) Effective January 1, 1994, any person who sells or distributes any aerosol or other pressurized dispenser of cleaning fluid for electronic and photographic equipment which contains a class II substance must prominently display a sign where sales of such product occur which states: "It is a violation of federal law to sell, distribute, or offer to sell or distribute, any aerosol hydrochlorofluorocarbon-containing cleaning fluid for electronic and photographic equipment to anyone who is not a commercial user of this product. The penalty for violating this prohibition can be up to \$25,000 per unit sold. Individuals purchasing such products must present proof of their commercial status in accordance with § 82.68(c)."

(e) Effective January 1, 1994, in order to satisfy the requirements under § 82.68 (b) and (d), any person who sells or distributes cleaning fluids for electronic and photographic equipment which contain a class I substance and those aerosol or pressurized dispensers of cleaning fluids which contain a class II substance, may prominently display one sign where sales of such products occur which states: "It is a violation of federal law to sell, distribute, or offer to sell or distribute, any chlorofluorocarbon-containing cleaning fluid for electronic and photographic equipment or aerosol hydrochlorofluorocarbon-containing cleaning fluid for electronic and photographic equipment to anyone who is not a commercial user of this product. The penalty for violating this prohibition can be up to \$25,000 per unit sold. Individuals purchasing such products must present proof of their commercial status in accordance with 40 CFR 82.68(a) or 82.68(c)."

(f)–(g) [Reserved]

(h) Effective January 1, 1994, any person who sells or distributes any mold release agents containing a class II substance as a propellant must provide written notification to the purchaser prior to the sale that "It is a violation of federal law to sell mold release agents containing

hydrochlorofluorocarbons as propellants to anyone, except for use in applications where no other alternative except a class I substance is available. The penalty for violating this prohibition can be up to \$25,000 per unit sold." Written notification may be placed on sales brochures, order forms, invoices and the like.

(i) Effective January 1, 1994, any person who sells or distributes any wasp and hornet spray containing a class II substance must provide written notification to the purchaser prior to the sale that "it is a violation of federal law to sell or distribute wasp and hornet sprays containing hydrochlorofluorocarbons as solvents to anyone, except for use near high-tension power lines where no other alternative except a class I substance is available. The penalty for violating this prohibition can be up to \$25,000 per unit sold." Written notification may be placed on sales brochures, order forms, invoices and the like.

[58 FR 69675, Dec. 30, 1993, as amended at 61 FR 64427, Dec. 4, 1996]

§ 82.70 Nonessential Class II products and exceptions.

The following products which release a class II substance (as designated as class II in 40 CFR part 82, appendix B to subpart A) are identified as being nonessential and the sale or distribution of such products is prohibited under § 82.64 (d), (e), or (f)—

(a) Any aerosol product or other pressurized dispenser which contains a class II substance:

(1) Including but not limited to household, industrial, automotive and pesticide uses;

(2) Except—

(i) Medical devices listed in 21 CFR 2.125(e);

(ii) Lubricants, coatings or cleaning fluids for electrical or electronic equipment, which contain class II substances for solvent purposes, but which contain no other class II substances;

(iii) Lubricants, coatings or cleaning fluids used for aircraft maintenance, which contain class II substances for solvent purposes but which contain no other class II substances;

(iv) Mold release agents used in the production of plastic and elastomeric

materials, which contain class II substances for solvent purposes but which contain no other class II substances, and/or mold release agents that contain HCFC-22 as a propellant where evidence of good faith efforts to secure alternatives indicates that, other than a class I substance, there are no suitable alternatives;

(v) Spinnerette lubricants/cleaning sprays used in the production of synthetic fibers, which contain class II substances for solvent purposes and/or contain class II substances for propellant purposes;

(vi) Document preservation sprays which contain HCFC-141b as a solvent, but which contain no other class II substance; and/or which contain HCFC-22 as a propellant, but which contain no other class II substance and which are used solely on thick books, books with coated, dense or paper and tightly bound documents;

(vii) Portable fire extinguishing equipment used for non-residential applications; and

(viii) Wasp and hornet sprays for use near high-tension power lines that contain a class II substance for solvent purposes only, but which contain no other class II substances.

(b) Any aerosol or pressurized dispenser cleaning fluid for electronic and photographic equipment which contains a class II substance, except for those sold or distributed to a commercial purchaser.

(c) Any plastic foam product which contains, or is manufactured with, a class II substance,

(1) Including but not limited to household, industrial, automotive and pesticide uses,

(2) Except—

(i) Any foam insulation product, as defined in § 82.62(h); and

(ii) Integral skin foam utilized to provide for motor vehicle safety in accordance with Federal Motor Vehicle Safety Standards until January 1, 1996, after which date such products are identified as nonessential and may only be sold or distributed or offered for sale or distribution in interstate commerce in accordance with § 82.65(d).

[58 FR 69675, Dec. 30, 1993, as amended at 61 FR 64427, Dec. 4, 1996]

Subpart D—Federal Procurement

SOURCE: 58 FR 54898, Oct. 22, 1993, unless otherwise noted.

§ 82.80 Purpose and scope.

(a) The purpose of this subpart is to require Federal departments, agencies, and instrumentalities to adopt procurement regulations which conform to the policies and requirements of title VI of the Clean Air Act as amended, and which maximize the substitution in Federal procurement of safe alternatives, as identified under section 612 of the Clean Air Act, for class I and class II substances.

(b) The regulations in this subpart apply to each department, agency, and instrumentality of the United States.

§ 82.82 Definitions.

(a) *Class I substance* means any substance designated as class I by EPA pursuant to 42 U.S.C. 7671(a), including but not limited to chlorofluorocarbons, halons, carbon tetrachloride and methyl chloroform.

(b) *Class II substance* means any substance designated as class II by EPA pursuant to 42 U.S.C. 7671(a), including but not limited to hydrochlorofluorocarbons.

(c) *Controlled substance* means a class I or class II ozone-depleting substance.

(d) *Department, agency and instrumentality of the United States* refers to any executive department, military department, or independent establishment within the meaning of 5 U.S.C. 101, 102, and 104(1), respectively, any wholly owned Government corporation, the United States Postal Service and Postal Rate Commission, and all parts of and establishments within the legislative and judicial branches of the United States.

§ 82.84 Requirements.

(a) No later than October 24, 1994, each department, agency and instrumentality of the United States shall conform its procurement regulations to the requirements and policies of title VI of the Clean Air Act, 42 U.S.C. 7671–7671g. Each such regulation shall provide, at a minimum, the following:

(1) That in place of class I or class II substances, or of products made with

or containing such substances, safe alternatives identified under 42 U.S.C. 7671k (or products made with or containing such alternatives) shall be substituted to the maximum extent practicable. Substitution is not required for class II substances identified as safe alternatives under 42 U.S.C. 7671k, or for products made with or containing such substances, and such substances may be used as substitutes for other class I or class II substances.

(2) That, consistent with the phase-out schedules for ozone-depleting substances, no purchases shall be made of class II substances, or products containing class II substances, for the purpose of any use prohibited under 42 U.S.C. 7671d(c);

(3) That all active or new contracts involving the performance of any service or activity subject to 42 U.S.C. 7671g or 7671h or regulations promulgated thereunder include, or be modified to include, a condition requiring the contractor to ensure compliance with all requirements of those sections and regulations;

(4) That no purchases shall be made of products whose sale is prohibited under 42 U.S.C. 7671h, except when they will be used by persons certified under section 609 to service vehicles, and no purchase shall be made of nonessential products as defined under 42 U.S.C. 7671i;

(5) That proper labeling under 42 U.S.C. 7671j shall be a specification for the purchase of any product subject to that section.

(b) For agencies subject to the Federal Acquisition Regulation, 48 CFR part 1, amendment of the FAR, consistent with this subpart, shall satisfy the requirement of this section.

§ 82.86 Reporting requirements.

(a) No later than one year after October 22, 1993, each agency, department, and instrumentality of the United States shall certify to the Office of Management and Budget that its procurement regulations have been amended in accordance with this section.

(b) Certification by the General Services Administration that the Federal Acquisition Regulation has been

Environmental Protection Agency

§ 82.104

amended in accordance with this section shall constitute adequate certification for purposes of all agencies subject to the Federal Acquisition Regulation.

Subpart E—The Labeling of Products Using Ozone-Depleting Substances

SOURCE: 60 FR 4020, Jan. 19, 1995, unless otherwise noted.

§ 82.100 Purpose.

The purpose of this subpart is to require warning statements on containers of, and products containing or manufactured with, certain ozone-depleting substances, pursuant to section 611 of the Clean Air Act, as amended.

§ 82.102 Applicability.

(a) In the case of substances designated as class I or class II substances as of February 11, 1993, the applicable date of the requirements in this paragraph (a) is May 15, 1993. In the case of any substance designated as a class I or class II substance after February 11, 1993, the applicable date of the requirements in this paragraph (a) is one year after the designation of such substance as a class I or class II substance unless otherwise specified in the designation. On the applicable date indicated in this paragraph (a), the requirements of this subpart shall apply to the following containers and products except as exempted under paragraph (c) of this section:

(1) All containers in which a class I or class II substance is stored or transported.

(2) All products containing a class I substance.

(3) All products directly manufactured with a process that uses a class I substance, unless otherwise exempted by this subpart or, unless the Administrator determines for a particular product that there are no substitute products or manufacturing processes for such product that do not rely on the use of a class I substance, that reduce overall risk to human health and the environment, and that are currently or potentially available. If the Administrator makes such a determination for

a particular product, then the requirements of this subpart are effective for such product no later than January 1, 2015.

(b) Applicable January 1, 2015 in any case, or one year after any determination between May 15, 1993 and January 1, 2015, by the Administrator for a particular product that there are substitute products or manufacturing processes for such product that do not rely on the use of a class I or class II substance, that reduce the overall risk to human health and the environment, and that are currently or potentially available, the requirements of this subpart shall apply to the following:

(1) All products containing a class II substance.

(2) All products manufactured with a process that uses a class II substance.

(c) The requirements of this subpart shall not apply to products manufactured prior to May 15, 1993, provided that the manufacturer submits documentation to EPA upon request showing that the product was manufactured prior to that date.

§ 82.104 Definitions.

(a) *Class I substance* means any substance designated as class I in 40 CFR part 82, appendix A to subpart A, including chlorofluorocarbons, halons, carbon tetrachloride and methyl chloroform and any other substance so designated by the Agency at a later date.

(b) *Class II substance* means any substance designated as class II in 40 CFR part 82, appendix A to subpart A, including hydrochlorofluorocarbons and any other substance so designated by the Agency at a later date.

(c) *Completely destroy* means to cause the destruction of a controlled substance by one of the destruction processes approved by the Parties and listed in § 82.3 at a demonstrable destruction efficiency of 98 percent or more or a greater destruction efficiency if required under other applicable Federal regulations.

(d) *Consumer* means a commercial or non-commercial purchaser of a product or container that has been introduced into interstate commerce.

(e) *Container* means the immediate vessel in which a controlled substance is stored or transported.

(f) *Container containing* means a container that physically holds a controlled substance within its structure that is intended to be transferred to another container, vessel or piece of equipment in order to realize its intended use.

(g) *Controlled substance* means a class I or class II ozone-depleting substance.

(h) *Destruction* means the expiration of a controlled substance to the destruction efficiency actually achieved, unless considered completely destroyed as defined in this section. Such destruction might result in a commercially useful end product but such usefulness would be secondary to the act of destruction. Destruction must be achieved using one of the controlled processes approved by the Parties and listed in the definition of *destruction* in § 82.3.

(i) *Distributor* means a person to whom a product is delivered or sold for purposes of subsequent resale, delivery or export.

(j) *Export* means the transport of virgin, used, or recycled class I or class II substances or products manufactured or containing class I or class II substances from inside the United States or its territories to persons outside the United States or its territories, excluding United States military bases and ships for on-board use.

(k) *Exporter* means the person who contracts to sell class I or class II substances or products manufactured with or containing class I or class II substances for export or transfers such substances or products to his affiliate in another country.

(l) *Import* means to land on, bring into, or introduce into, or attempt to land on, bring into, or introduce into any place subject to the jurisdiction of the United States whether or not such landing, bringing, or introduction constitutes an importation within the meaning of the customs laws of the United States, with the exception of temporary off-loading of products manufactured with or containing class I or class II substances from a ship are used for servicing of that ship.

(m) *Importer* means any person who imports a controlled substance, a product containing a controlled substance,

a product manufactured with a controlled substance, or any other chemical substance (including a chemical substance shipped as part of a mixture or article), into the United States. “Importer” includes the person primarily liable for the payment of any duties on the merchandise or an authorized agent acting on his or her behalf. The term also includes, as appropriate:

(1) The consignee;

(2) The importer of record;

(3) The actual owner if an actual owner’s declaration and superseding bond has been filed; or

(4) The transferee, if the right to draw merchandise in a bonded warehouse has been transferred.

(n) *Interstate commerce* means the distribution or transportation of any product between one state, territory, possession or the District of Columbia, and another state, territory, possession or the District of Columbia, or the sale, use or manufacture of any product in more than one state, territory, possession or District of Columbia. The entry points for which a product is introduced into interstate commerce are the release of a product from the facility in which the product was manufactured, the entry into a warehouse from which the domestic manufacturer releases the product for sale or distribution, and at the site of United States Customs clearance.

(o) *Manufactured with a controlled substance* means that the manufacturer of the product itself used a controlled substance directly in the product’s manufacturing, but the product itself does not contain more than trace quantities of the controlled substance at the point of introduction into interstate commerce. The following situations are excluded from the meaning of the phrase “manufactured with” a controlled substance:

(1) Where a product has not had physical contact with the controlled substance;

(2) Where the manufacturing equipment or the product has had physical contact with a controlled substance in an intermittent manner, not as a routine part of the direct manufacturing process;

(3) Where the controlled substance has been transformed, except for trace quantities; or

(4) Where the controlled substance has been completely destroyed.

(p) *Potentially available* means that adequate information exists to make a determination that the substitute is technologically feasible, environmentally acceptable and economically viable.

(q) *Principal display panel (PDP)* means the entire portion of the surface of a product, container or its outer packaging that is most likely to be displayed, shown, presented, or examined under customary conditions of retail sale. The area of the PDP is not limited to the portion of the surface covered with existing labeling; rather it includes the entire surface, excluding flanges, shoulders, handles, or necks.

(r) *Product* means an item or category of items manufactured from raw or recycled materials, or other products, which is used to perform a function or task.

(s) *Product containing* means a product including, but not limited to, containers, vessels, or pieces of equipment, that physically holds a controlled substance at the point of sale to the ultimate consumer which remains within the product.

(t) *Promotional printed material* means any informational or advertising material (including, but not limited to, written advertisements, brochures, circulars, desk references and fact sheets) that is prepared by the manufacturer for display or promotion concerning a product or container, and that does not accompany the product to the consumer.

(u) *Retailer* means a person to whom a product is delivered or sold, if such delivery or sale is for purposes of sale or distribution in commerce to consumers who buy such product for purposes other than resale.

(v) *Spare parts* means those parts that are supplied by a manufacturer to another manufacturer, distributor, or retailer, for purposes of replacing similar parts with such parts in the repair of a product.

(w) *Supplemental printed material* means any informational material (including, but not limited to, package in-

serts, fact sheets, invoices, material safety data sheets, procurement and specification sheets, or other material) which accompanies a product or container to the consumer at the time of purchase.

(x) *Transform* means to use and entirely consume a class I or class II substance, except for trace quantities, by changing it into one or more substances not subject to this subpart in the manufacturing process of a product or chemical.

(y) *Type size* means the actual height of the printed image of each capital letter as it appears on a label.

(z) *Ultimate consumer* means the first commercial or non-commercial purchaser of a container or product that is not intended for re-introduction into interstate commerce as a final product or as part of another product.

(aa) *Warning label* means the warning statement required by section 611 of the Act. The term warning statement shall be synonymous with warning label for purposes of this subpart.

(bb) *Waste* means, for purposes of this subpart, items or substances that are discarded with the intent that such items or substances will serve no further useful purpose.

(cc) *Wholesaler* means a person to whom a product is delivered or sold, if such delivery or sale is for purposes of sale or distribution to retailers who buy such product for purposes of resale.

[60 FR 4020, Jan. 19, 1995, as amended at 81 FR 6768, Feb. 9, 2016; 85 FR 15300, Mar. 17, 2020]

§ 82.106 Warning statement requirements.

(a) *Required warning statements.* (1) Unless otherwise exempted by this subpart, each container or product identified in § 82.102(a) or (b) shall bear the following warning statement, meeting the requirements of this subpart for placement and form:

WARNING: Contains [or Manufactured with, if applicable] [*insert name of substance*], a substance which harms public health and environment by destroying ozone in the upper atmosphere.

(2) Each container of fire suppression agent containing HCFC-123 produced or imported on or after January 1, 2020

shall bear the following warning statement, meeting the requirements of this subpart for placement and form:

WARNING: Contains [insert name of substance], a substance which harms public health and environment by destroying ozone in the upper atmosphere. Use Only for Recharge of Equipment Manufactured before January 1, 2020.

(3) Each container of fire suppression agent containing reclaimed HCFC–123 or HCFC–123 that was imported prior to January 1, 2020, shall bear the following warning statement, meeting the requirements of this subpart for placement and form:

WARNING: Contains [insert name of substance], a substance which harms public health and environment by destroying ozone in the upper atmosphere. For use in any equipment.

(b) *Exemptions from warning label requirement.* The following products need not bear a warning label:

(1) Products containing trace quantities of a controlled substance remaining as a residue or impurity due to a chemical reaction, and where the controlled substance serves no useful purpose in or for the product itself. However, if such product was manufactured using the controlled substance, the product is required to be labeled as a “product manufactured with” the controlled substance, unless otherwise exempted;

(2) Containers containing a controlled substance in which trace quantities of that controlled substance remain as a residue or impurity;

(3) Waste containing controlled substances or blends of controlled substances bound for discard;

(4) Products manufactured using methyl chloroform or CFC-113 by persons who can demonstrate and certify a 95% reduction in overall usage from their 1990 calendar year usage of methyl chloroform or CFC-113 as solvents during a twelve (12) month period ending within sixty (60) days of such certification or during the most recently completed calendar year. In calculating such reduction, persons may subtract from quantities used those quantities for which they possess accessible data that establishes the amount of methyl chloroform or CFC-

113 transformed. Such subtraction must be performed for both the applicable twelve month period and the 1990 calendar year. If at any time future usage exceeds the 95% reduction, all products manufactured with methyl chloroform or CFC-113 as solvents by that person must be labeled immediately. No person may qualify for this exemption after May 15, 1994;

(5) Products intended only for export outside of the United States shall not be considered “products introduced into interstate commerce” provided such products are clearly designated as intended for export only;

(6) Products that are otherwise not subject to the requirements of this subpart that are being repaired, using a process that uses a controlled substance.

(7) Products, processes, or substitute chemicals undergoing research and development, by which a controlled substance is used. Such products must be labeled when they are introduced into interstate commerce.

(c) *Interference with other required labeling information.* The warning statement shall not interfere with, detract from, or mar any labeling information required on the labeling by federal or state law.

[60 FR 4020, Jan. 19, 1995, as amended at 85 FR 15300, Mar. 17, 2020]

§ 82.108 Placement of warning statement.

The warning statement shall be placed so as to satisfy the requirement of the Act that the warning statement be “clearly legible and conspicuous.” The warning statement is clearly legible and conspicuous if it appears with such prominence and conspicuousness as to render it likely to be read and understood by consumers under normal conditions of purchase. Such placement includes, but is not limited to, the following:

(a) *Display panel placement.* For any affected product or container that has a display panel that is normally viewed by the purchaser at the time of the purchase, the warning statement described in § 82.106 may appear on any such display panel of the affected product or container such that it is “clearly legible and conspicuous” at the time

of the purchase. If the warning statement appears on the principal display panel or outer packaging of any such affected product or container, the warning statement shall qualify as "clearly legible and conspicuous," as long as the label also fulfills all other requirements of this subpart and is not obscured by any outer packaging, as required by paragraph (b) of this section. The warning statement need not appear on such display panel if either:

(1) The warning statement appears on the outer packaging of the product or container, consistent with paragraph (b) of this section, and is clearly legible and conspicuous; or

(2) The warning statement is placed in a manner consistent with paragraph (c) of this section.

(b) *Outer packaging.* If the product or container is normally packaged, wrapped, or otherwise covered when viewed by the purchaser at the time of the purchase the warning statement described in § 82.106 shall appear on any outer packaging, wrapping or other covering used in the retail display of the product or container, such that the warning statement is clearly legible and conspicuous at the time of the purchase. If the outer packaging has a display panel that is normally viewed by the purchaser at the time of the purchase, the warning statement shall appear on such display panel. If the warning statement so appears on such product's or container's outer packaging, it need not appear on the surface of the product or container, as long as the statement also fulfills all other requirements of this subpart. The warning statement need not appear on such outer packaging if either:

(1) The warning statement appears on the surface of the product or container, consistent with paragraph (a) of this section, and is clearly legible and conspicuous through any outer packaging, wrapping or other covering used in display; or

(2) The warning statement is placed in a manner consistent with paragraph (c) of this section.

(c) *Alternative placement.* The warning statement may be placed on a hang tag, tape, card, sticker, invoice, bill of lading, supplemental printed material, or similar overlabeing that is securely

attached to the container, product, outer packaging or display case, or accompanies the product containing or manufactured with a controlled substance or a container containing class I or class II substances through its sale to the consumer or ultimate consumer. For prescription medical products that have been found to be essential for patient health by the Food and Drug Administration, the warning statement may be placed in supplemental printed material intended to be read by the prescribing physician, as long as the following statement is placed on the product, its packaging, or supplemental printed material intended to be read by the patient: "This product contains [insert name of substance], a substance which harms the environment by depleting ozone in the upper atmosphere." In any case, the warning statement must be clearly legible and conspicuous at the time of the purchase.

(d) *Products not viewed by the purchaser at the time of purchase.* Where the purchaser of a product cannot view a product, its packaging or alternative labeling such that the warning statement is clearly legible and conspicuous at the time of purchase, as specified under paragraphs (a), (b), or (c) of this section, the warning statement may be placed in the following manner:

(1) Where promotional printed material is prepared for display or distribution, the warning statement may be placed on such promotional printed material such that it is clearly legible and conspicuous at the time of purchase; or

(2) The warning statement may be placed on the product, on its outer packaging, or on alternative labeling, consistent with paragraphs (a), (b), or (c) of this section, such that the warning statement is clearly legible and conspicuous at the time of product delivery, if the product may be returned by the purchaser at or after the time of delivery or if the purchase is not complete until the time of delivery (e.g., products delivered C.O.D.).

§ 82.110 Form of label bearing warning statement.

(a) *Conspicuousness and contrast.* The warning statement shall appear in conspicuous and legible type by typography, layout, and color with other printed matter on the label. The warning statement shall appear in sharp contrast to any background upon which it appears. Examples of combinations of colors which may not satisfy the proposed requirement for sharp contrast are: black letters on a dark blue or dark green background, dark red letters on a light red background, light red letters on a reflective silver background, and white letters on a light gray or tan background.

(b) *Name of substance.* The name of the class I or class II substance to be inserted into the warning statement shall be the standard chemical name of the substance as listed in 40 CFR part 82, appendix A to subpart A, except that:

(1) The acronym “CFC” may be substituted for “chlorofluorocarbon.”

(2) The acronym “HCFC” may be substituted for “hydrochlorofluorocarbon.”

(3) The term “1,1,1-trichloroethane” may be substituted for “methyl chloroform.”

(c) *Combined statement for multiple controlled substances.* If a container containing or a product contains or is manufactured with, more than one class I or class II substance, the warning statement may include the names

of all of the substances in a single warning statement, provided that the combined statement clearly distinguishes which substances the container or product contains and which were used in the manufacturing process.

(d) *Format.* (1) The warning statement shall be blocked within a square or rectangular area, with or without a border. (2) The warning statement shall appear in lines that are parallel to the surrounding text on the product’s PDP, display panel, supplemental printed material or promotional printed material.

(e) *Type style.* The ratio of the height of a capital letter to its width shall be such that the height of the letter is no more than 3 times its width; the signal word “WARNING” shall appear in all capital letters.

(f) *Type size.* The warning statement shall appear at least as large as the type sizes prescribed by this paragraph. The type size refers to the height of the capital letters. A larger type size materially enhances the legibility of the statement and is desirable.

(1) *Display panel or outer packaging.* Minimum type size requirements for the warning statement are given in Table 1 to this paragraph and are based upon the area of the display panel of the product or container. Where the statement is on outer packaging, as well as the display panel area, the statement shall appear in the same minimum type size as on the display panel.

TABLE 1 TO § 82.110(f)(1)

	Area of display panel (sq. in.)					
	0–2	>2–5	>5–10	>10–15	>15–30	>30
Type size (in.) ¹						
Signal word	3/64	1/16	3/32	7/64	1/8	5/32
Statement	3/64	3/64	1/16	3/32	3/32	7/64

>Means greater than.

¹ Minimum height of printed image of letters.

(2) *Alternative placement.* The minimum type size for the warning statement on any alternative placement which meets the requirements of § 82.108(c) is 3/32 inches for the signal word and 1/16 of an inch for the statement.

(3) *Promotional printed material.* The minimum type size for the warning statement on promotional printed material is 3/32 inches for the signal word and 1/16 of an inch for the statement, or

Environmental Protection Agency

§ 82.114

the type size of any surrounding text, whichever is larger.

[60 FR 4020, Jan. 19, 1995, as amended at 79 FR 64289, Oct. 28, 2014]

§ 82.112 Removal of label bearing warning statement.

(a) *Prohibition on removal.* Except as described in paragraph (b) or (c) of this section, any warning statement that accompanies a product or container introduced into interstate commerce, as required by this subpart, must remain with the product or container and any product incorporating such product or container, up to and including the point of sale to the ultimate consumer.

(b) *Incorporation of warning statement by subsequent manufacturers.* A manufacturer of a product that incorporates a product that is accompanied by a label bearing the warning statement may remove such label from the incorporated product if the information on such label is incorporated into a warning statement accompanying the manufacturer's product, or if, pursuant to paragraph (c) of this section, the manufacturer of the product is not required to pass through the information contained on or incorporated in the product's label.

(c) *Manufacturers that incorporate products manufactured with controlled substances.* A manufacturer that incorporates into its own product a component product that was purchased from another manufacturer, was manufactured with a process that uses a controlled substance(s), but does not contain such substance(s), may remove such label from the incorporated product and need not apply a warning statement to its own product, if the manufacturer does not use a controlled substance in its own manufacturing process. A manufacturer that uses controlled substances in its own manufacturing process, and is otherwise subject to the regulations of this subpart, must label pursuant to § 82.106, but need not include information regrading the incorporated product on the required label.

(d) *Manufacturers, distributors, wholesalers, retailers that sell spare parts manufactured with controlled substances solely for repair.* Manufacturers, distributors, wholesalers, and retailers that

purchase spare parts manufactured with a class I or class II substance from another manufacturer or supplier, and sell such spare parts for the sole purpose of repair, are not required to pass through an applicable warning label if such products are removed from the original packaging provided by the manufacturer from whom the products are purchased. Manufacturers of the spare parts manufactured with controlled substances must still label their products; furthermore, manufacturers, importers, and distributors of such products must pass through the labeling information as long as products remain assembled and packaged in the manner assembled and packaged by the original manufacturer. This exemption shall not apply if a spare part is later used for manufacture and/or for purposes other than repair.

[60 FR 4020, Jan. 19, 1995, as amended at 79 FR 64289, Oct. 28, 2014]

§ 82.114 Compliance by manufacturers and importers with requirements for labeling of containers of controlled substances, or products containing controlled substances.

(a) *Compliance by manufacturers and importers with requirements for labeling of containers of controlled substances, or products containing controlled substances.* Each manufacturer of a product incorporating another product or container containing a controlled substance, to which § 82.102 (a)(1), or, (a)(2) or (b)(1) applies, that is purchased or obtained from another manufacturer or supplier, is required to pass through and incorporate the labeling information that accompanies such incorporated product in a warning statement accompanying the manufacturer's finished product. Each importer of a product, or container containing a controlled substance, to which § 82.102 (a)(1), (a)(2), or (b)(1) applies, including a component product or container incorporated into the product, that is purchased from a foreign manufacturer or supplier, is required to apply a label, or to ensure that a label has been properly applied, at the site of U.S. Customs clearance.

(b) *Reliance on reasonable belief.* The manufacturer or importer of a product

that incorporates another product container from another manufacturer or supplier may rely on the labeling information (or lack thereof) that it receives with the product, and is not required to independently investigate whether the requirements of this subpart are applicable to such purchased product or container, as long as the manufacturer reasonably believes that the supplier or foreign manufacturer is reliably and accurately complying with the requirements of this subpart.

(c) *Contractual obligations.* A manufacturer's or importer's contractual relationship with its supplier under which the supplier is required to accurately label, consistent with the requirements of this subpart, any products containing a controlled substance or containers of a controlled substance that are supplied to the manufacturer or importer, is evidence of reasonable belief.

§ 82.116 Compliance by manufacturers or importers incorporating products manufactured with controlled substances.

(a) *Compliance by manufacturers or importers incorporating products manufactured with controlled substances, or importing products manufactured with controlled substances.* Each manufacturer or importer of a product incorporating another product to which § 82.102 (a)(3) or (b)(2) applies, that is purchased from another manufacturer or supplier, is not required to pass through and incorporate the labeling information that accompanies such incorporated product in a warning statement accompanying the manufacturer's or importer's finished product. Importers of products to which § 82.102 (a)(3) or (b)(2) applies are required to apply a label, or to ensure that a label has been properly applied at the site of U.S. Customs clearance.

(b) *Reliance on reasonable belief.* The importer of a product purchased or obtained from a foreign manufacturer or supplier, which product may have been manufactured with a controlled substance, may rely on the information that it receives with the purchased product, and is not required to independently investigate whether the requirements of this subpart are applicable to the purchased or obtained prod-

uct, as long as the importer reasonably believes that there was no use of controlled substances by the final manufacturer of the product being imported.

(c) *Contractual obligations.* An importer's contractual relationship with its supplier under which the supplier is required to accurately label, consistent with the requirements of this subpart, any products manufactured with a controlled substance that are supplied to the importer, or to certify to the importer whether a product was or was not manufactured with a controlled substance is evidence of reasonable belief.

§ 82.118 Compliance by wholesalers, distributors and retailers.

(a) *Requirement of compliance by wholesalers, distributors and retailers.* All wholesalers, distributors and retailers of products or containers to which this subpart applies are required to pass through the labeling information that accompanies the product, except those purchasing from other manufacturers or suppliers spare parts manufactured with controlled substances and selling those parts for the demonstrable sole purpose of repair.

(b) *Reliance on reasonable belief.* The wholesaler, distributor or retailer of a product may rely on the labeling information that it receives with the product or container, and is not required to independently investigate whether the requirements of this subpart are applicable to the product or container, as long as the wholesaler, distributor or retailer reasonably believes that the supplier of the product or container is reliably and accurately complying with the requirements of this subpart.

(c) *Contractual obligations.* A wholesaler, distributor or retailer's contractual relationship with its supplier under which the supplier is required to accurately label, consistent with the requirements of this subpart, any products manufactured with a controlled substance that are supplied to the wholesaler, distributor or retailer is evidence of reasonable belief.

§ 82.120 Petitions.

(a) *Requirements for procedure and timing.* Persons seeking to apply the requirements of this regulation to a

product containing a class II substance or a product manufactured with a class I or a class II substance which is not otherwise subject to the requirements, or to temporarily exempt a product manufactured with a class I substance, based on a showing of a lack of currently or potentially available alternatives, from the requirements of this regulation may submit petitions to: Labeling Program Manager, Stratospheric Protection Division, Office of Atmospheric Programs, U.S. Environmental Protection Agency, 6202-J, 1200 Pennsylvania Ave., NW., Washington, DC 20460. Such persons must label their products while such petitions are under review by the Agency.

(b) *Requirement for adequate data.* Any petition submitted under paragraph (a) of this section shall be accompanied by adequate data, as defined in § 82.120(c). If adequate data are not included by the petitioner, the Agency may return the petition and request specific additional information.

(c) *Adequate data.* A petition shall be considered by the Agency to be supported by adequate data if it includes all of the following:

(1) A part clearly labeled "Section I.A." which contains the petitioner's full name, company or organization name, address and telephone number, the product that is the subject of the petition, and, in the case of a petition to temporarily exempt a product manufactured with a class I substance from the labeling requirement, the manufacturer or manufacturers of that product.

(2) For petitions to temporarily exempt a product manufactured with a class I substance only, a part clearly labeled "Section I.A.T." which states the length of time for which an exemption is requested.

(3) A part clearly labeled "Section I.B." which includes the following statement, signed by the petitioner or an authorized representative:

"I certify under penalty of law that I have personally examined and am familiar with the information submitted in this petition and all attached documents, and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the submitted information is true, accurate, and complete.

I am aware that there are significant penalties for submitting false information."

(4) A part clearly labeled "Section I.C." which fully explains the basis for the petitioner's request that EPA add the labeling requirements to or remove them from the product which is the subject of the petition, based specifically upon the technical facility or laboratory tests, literature, or economic analysis described in paragraphs (c) (5), (6) and (7) of this section.

(5) A part clearly labeled "Section II.A." which fully describes any technical facility or laboratory tests used to support the petitioner's claim.

(6) A part clearly labeled "Section II.B." which fully explains any values taken from literature or estimated on the basis of known information that are used to support the petitioner's claim.

(7) A part clearly labeled "Section II.C." which fully explains any economic analysis used to support the petitioner's claim.

(d) *Criteria for evaluating petitions.* Adequate data in support of any petition to the Agency to add a product to the labeling requirement or temporarily remove a product from the labeling requirement will be evaluated based upon a showing of sufficient quality and scope by the petitioner of whether there are or are not substitute products or manufacturing processes for such product:

(1) That do not rely on the use of such class I or class II substance;

(2) That reduce the overall risk to human health and the environment; and

(3) That are currently or potentially available.

(e) *Procedure for acceptance or denial of petition.* (1) If a petition submitted under this section contains adequate data, as defined under paragraph (c) of this section, the Agency shall within 180 days after receiving the complete petition either accept the petition or deny the petition.

(2) If the Agency makes a decision to accept a petition to apply the requirements of this regulation to a product containing or manufactured with a

class II substance, the Agency will notify the petitioner and publish a proposed rule in the FEDERAL REGISTER to apply the labeling requirements to the product.

(3) If the Agency makes a decision to deny a petition to apply the requirements of this regulation to a product containing or manufactured with a class II substance, the Agency will notify the petitioner and publish an explanation of the petition denial in the FEDERAL REGISTER.

(4) If the Agency makes a decision to accept a petition to temporarily exempt a product manufactured with a class I substance from the requirements of this regulation, the Agency will notify the petitioner and publish a proposed rule in the FEDERAL REGISTER to temporarily exempt the product from the labeling requirements. Upon notification by the Agency, such manufacturer may immediately cease its labeling process for such exempted products.

(5) If the Agency makes a decision to deny a petition to temporarily exempt a product manufactured with a class I substance from the requirements of this regulation, the Agency will notify the petitioner and may, in appropriate circumstances, publish an explanation of the petition denial in the FEDERAL REGISTER.

§ 82.122 Certification, recordkeeping, and notice requirements.

(a) *Certification.* (1) Persons claiming the exemption provided in § 82.106(b)(4) must submit a written certification to the following address: Labeling Program Manager, Stratospheric Protection Division, Office of Atmospheric Programs, 6205–T, 1200 Pennsylvania Ave. NW., Washington DC 20460.

(2) The certification must contain the following information:

(i) The exact location of documents verifying calendar year 1990 usage and the 95% reduced usage during a twelve month period;

(ii) A description of the records maintained at that location;

(iii) A description of the type of system used to track usage;

(iv) An indication of which 12 month period reflects the 95% reduced usage, and;

(v) Name, address, and telephone number of a contact person.

(3) Persons who submit certifications postmarked on or before May 15, 1993, need not place warning labels on their products manufactured using CFC-113 or methyl chloroform as a solvent. Persons who submit certifications postmarked after May 15, 1993, must label their products manufactured using CFC-113 or methyl chloroform as a solvent for 14 days following such submittal of the certification.

(4) Persons certifying must also include a statement that indicates their future annual use will at no time exceed 5% of their 1990 usage.

(5) Certifications must be signed by the owner or a responsible corporate officer.

(6) If the Administrator determines that a person's certification is incomplete or that information supporting the exemption is inadequate, then products manufactured using CFC-113 or methyl chloroform as a solvent by such person must be labeled pursuant to § 82.106(a).

(b) *Recordkeeping.* Persons claiming the exemption under section 82.106(b)(2) must retain supporting documentation at one of their facilities.

(c) *Notice Requirements.* Persons who claim an exemption under § 82.106(b)(2) must submit a notice to the address in paragraph (a)(1) of this section within 30 days of the end of any 12 month period in which their usage of CFC-113 or methyl chloroform used as a solvent exceeds the 95% reduction from calendar year 1990.

[60 FR 4020, Jan. 19, 1995, as amended at 79 FR 64289, Oct. 28, 2014]

§ 82.124 Prohibitions.

(a) *Warning statement—(1) Absence or presence of warning statement.* (i) Applicable May 15, 1993, except as indicated in paragraph (a)(5) of this section, no container or product identified in § 82.102(a) may be introduced into interstate commerce unless it bears a warning statement that complies with the requirements of § 82.106(a) of this subpart, unless such labeling is not required under § 82.102(c), § 82.106(b), § 82.112 (c) or (d), § 82.116(a), § 82.118(a), or temporarily exempted pursuant to § 82.120.

(ii) On January 1, 2015, or any time between May 15, 1993 and January 1, 2015 that the Administrator determines for a particular product manufactured with or containing a class II substance that there are substitute products or manufacturing processes for such product that do not rely on the use of a class I or class II substance, that reduce the overall risk to human health and the environment, and that are currently or potentially available, no product identified in § 82.102(b) may be introduced into interstate commerce unless it bears a warning statement that complies with the requirements of § 82.106, unless such labeling is not required under § 82.106(b), § 82.112 (c) or (d), § 82.116(a) or § 82.118(a).

(2) *Placement of warning statement.* (i) On May 15, 1993, except as indicated in paragraph (a)(5) of this section, no container or product identified in § 82.102(a) may be introduced into interstate commerce unless it bears a warning statement that complies with the requirements of § 82.108 of this subpart, unless such labeling is not required under § 82.102(c), § 82.106(b), § 82.112 (c) or (d), § 82.116(a), § 82.118(a), or temporarily exempted pursuant to § 82.120.

(ii) On January 1, 2015, or any time between May 15, 1993 and January 1, 2015 that the Administrator determines for a particular product manufactured with or containing a class II substance that there are substitute products or manufacturing processes for such product that do not rely on the use of a class I or class II substance, that reduce the overall risk to human health and the environment, and that are currently or potentially available, no product identified in § 82.102(b) may be introduced into interstate commerce unless it bears a warning statement that complies with the requirements of § 82.108 of this subpart, unless such labeling is not required under § 82.106(b), § 82.112 (c) or (d), § 82.116(a) or § 82.118(a).

(3) *Form of label bearing warning statement.* (i) Applicable May 15, 1993, except as indicated in paragraph (a)(5) of this section, no container or product identified in § 82.102(a) may be introduced into interstate commerce unless it bears a warning statement that complies with the requirements of § 82.110, unless such labeling is not required

pursuant to § 82.102(c), § 82.106(b), § 82.112 (c) or (d), § 82.116(a), § 82.118(a), or temporarily exempted pursuant to § 82.120.

(ii) On January 1, 2015, or any time between May 15, 1993 and January 1, 2015 that the Agency determines for a particular product manufactured with or containing a class II substance, that there are substitute products or manufacturing processes that do not rely on the use of a class I or class II substance, that reduce the overall risk to human health and the environment, and that are currently or potentially available, no product identified in § 82.102(b) may be introduced into interstate commerce unless it bears a warning statement that complies with the requirements of § 82.110, unless such labeling is not required pursuant to § 82.106(b), § 82.112 (c) or (d), § 82.116(a), or § 82.118(a).

(4) On or after May 15, 1993, no person may modify, remove or interfere with any warning statement required by this subpart, except as described in § 82.112.

(5) In the case of any substance designated as a class I or class II substance after February 11, 1993, the prohibitions in paragraphs (a)(1)(i), (a)(2)(i), and (a)(3)(i) of this section shall be applicable one year after the designation of such substance as a class I or class II substance unless otherwise specified in the designation.

Subpart F—Recycling and Emissions Reduction

SOURCE: 58 FR 28712, May 14, 1993, unless otherwise noted.

§ 82.150 Purpose and scope.

(a) The purpose of this subpart is to reduce emissions of class I and class II refrigerants and their non-exempt substitutes to the lowest achievable level by maximizing the recapture and recycling of such refrigerants during the maintenance, service, repair, and disposal of appliances and restricting the sale of refrigerants consisting in whole or in part of a class I or class II ozone-depleting substance or their non-exempt substitutes in accordance with Title VI of the Clean Air Act.

(b) This subpart applies to any person maintaining, servicing, or repairing appliances containing class I, class II or non-exempt substitute refrigerants. This subpart also applies to persons disposing of such appliances (including small appliances and motor vehicle air conditioners), refrigerant reclaimers, technician certifying programs, appliance owners and operators, manufacturers of appliances, manufacturers of recovery and/or recycling equipment, approved recovery and/or recycling equipment testing organizations, and persons buying, selling, or offering to sell class I, class II, or non-exempt substitute refrigerants.

[81 FR 82349, Nov. 11, 2016]

§ 82.152 Definitions.

Appliance means any device which contains and uses a class I or class II substance or substitute as a refrigerant and which is used for household or commercial purposes, including any air conditioner, motor vehicle air conditioner, refrigerator, chiller, or freezer. For a system with multiple circuits, each independent circuit is considered a separate appliance.

Apprentice means any person who is currently registered as an apprentice in maintenance, service, repair, or disposal of appliances with the U.S. Department of Labor's Office of Apprenticeship (or a State Apprenticeship Council recognized by the Office of Apprenticeship). A person may only be an apprentice for two years from the date of first registering with that office.

Approved equipment testing organization means any organization which has applied for and received approval from the Administrator pursuant to § 82.160.

Batch means a single bulk cylinder of refrigerant after all reclamation has been completed prior to packaging or shipping to the market.

Class I refers to an ozone-depleting substance that is listed in 40 CFR part 82 subpart A, appendix A.

Class II refers to an ozone-depleting substance that is listed in 40 CFR part 82 subpart A, appendix B.

Certified refrigerant recovery or recycling equipment means equipment manufactured before November 15, 1993, that meets the standards in § 82.158(c), (e), or (g); equipment certified by an

approved equipment testing organization to meet the standards in § 82.158(b), (d), or (f); or equipment certified pursuant to § 82.36(a).

Comfort cooling means the air-conditioning appliances used to provide cooling in order to control heat and/or humidity in occupied facilities including but not limited to residential, office, and commercial buildings. Comfort cooling appliances include but are not limited to chillers, commercial split systems, and packaged roof-top units.

Commercial refrigeration means the refrigeration appliances used in the retail food and cold storage warehouse sectors. Retail food appliances include the refrigeration equipment found in supermarkets, convenience stores, restaurants and other food service establishments. Cold storage includes the refrigeration equipment used to store meat, produce, dairy products, and other perishable goods.

Component means a part of the refrigerant circuit within an appliance including, but not limited to, compressors, condensers, evaporators, receivers, and all of its connections and sub-assemblies.

Custom-built means that the industrial process equipment or any of its components cannot be purchased and/or installed without being uniquely designed, fabricated and/or assembled to satisfy a specific set of industrial process conditions.

Disposal means the process leading to and including:

(1) The discharge, deposit, dumping or placing of any discarded appliance into or on any land or water;

(2) The disassembly of any appliance for discharge, deposit, dumping or placing of its discarded component parts into or on any land or water;

(3) The vandalism of any appliance such that the refrigerant is released into the environment or would be released into the environment if it had not been recovered prior to the destructive activity;

(4) The disassembly of any appliance for reuse of its component parts; or

(5) The recycling of any appliance for scrap.

Follow-up verification test means those tests that involve checking the repairs

to an appliance after a successful initial verification test and after the appliance has returned to normal operating characteristics and conditions to verify that the repairs were successful. Potential methods for follow-up verification tests include, but are not limited to, the use of soap bubbles as appropriate, electronic or ultrasonic leak detectors, pressure or vacuum tests, fluorescent dye and black light, infrared or near infrared tests, and handheld gas detection devices.

Full charge means the amount of refrigerant required for normal operating characteristics and conditions of the appliance as determined by using one or a combination of the following four methods:

- (1) Use of the equipment manufacturer's determination of the full charge;
- (2) Use of appropriate calculations based on component sizes, density of refrigerant, volume of piping, and other relevant considerations;
- (3) Use of actual measurements of the amount of refrigerant added to or evacuated from the appliance, including for seasonal variances; and/or
- (4) Use of an established range based on the best available data regarding the normal operating characteristics and conditions for the appliance, where the midpoint of the range will serve as the full charge.

High-pressure appliance means an appliance that uses a refrigerant with a liquid phase saturation pressure between 170 psia and 355 psia at 104 °F. Examples include but are not limited to appliances using R-22, R-407A, R-407C, R-410A, and R-502.

Industrial process refrigeration means complex customized appliances that are directly linked to the processes used in, for example, the chemical, pharmaceutical, petrochemical, and manufacturing industries. This sector also includes industrial ice machines, appliances used directly in the generation of electricity, and ice rinks. Where one appliance is used for both industrial process refrigeration and other applications, it will be considered industrial process refrigeration equipment if 50 percent or more of its operating capacity is used for industrial process refrigeration.

Industrial process shutdown means when an industrial process or facility temporarily ceases to operate or manufacture whatever is being produced at that facility.

Initial verification test means those leak tests that are conducted after the repair is finished to verify that a leak or leaks have been repaired before refrigerant is added back to the appliance.

Leak inspection means the examination of an appliance to determine the location of refrigerant leaks. Potential methods include, but are not limited to, ultrasonic tests, gas-imaging cameras, bubble tests as appropriate, or the use of a leak detection device operated and maintained according to manufacturer guidelines. Methods that determine whether the appliance is leaking refrigerant but not the location of a leak, such as standing pressure/vacuum decay tests, sight glass checks, viewing receiver levels, pressure checks, and charging charts, must be used in conjunction with methods that can determine the location of a leak.

Leak rate means the rate at which an appliance is losing refrigerant, measured between refrigerant charges. The leak rate is expressed in terms of the percentage of the appliance's full charge that would be lost over a 12-month period if the current rate of loss were to continue over that period. The rate must be calculated using one of the following methods. The same method must be used for all appliances subject to the leak repair requirements located at an operating facility.

(1) Annualizing Method. (i) Step 1. Take the number of pounds of refrigerant added to the appliance to return it to a full charge, whether in one addition or if multiple additions related to same leak, and divide it by the number of pounds of refrigerant the appliance normally contains at full charge;

(ii) Step 2. Take the shorter of the number of days that have passed since the last day refrigerant was added or 365 days and divide that number by 365 days;

(iii) Step 3. Take the number calculated in Step 1 and divide it by the number calculated in Step 2; and

(iv) Step 4. Multiply the number calculated in Step 3 by 100 to calculate a

percentage. This method is summarized in the following formula:

$$\text{Leak rate} = \frac{\text{pounds of refrigerant added}}{\text{pounds of refrigerant in full charge}} \times \frac{365 \text{ days/year}}{\text{shorter of: \# days since refrigerant last added or 365 days}} \times 100\%$$

(% per year)

(2) Rolling Average Method. (i) Step 1. Take the sum of the pounds of refrigerant added to the appliance over the previous 365-day period (or over the period that has passed since the last successful follow-up verification test showing all identified leaks in the appliance were repaired, if that period is less than one year);

(ii) Step 2. Divide the result of Step 1 by the pounds of refrigerant the appliance normally contains at full charge; and

(iii) Step 3. Multiply the result of Step 2 by 100 to obtain a percentage. This method is summarized in the following formula:

$$\text{Leak rate} = \frac{\begin{array}{c} \text{pounds of refrigerant added over past 365 days} \\ \text{(or since the last successful follow-up verification test showing all identified} \\ \text{leaks in the appliance were repaired, if that period is less than one year)} \end{array}}{\text{pounds of refrigerant in full charge}} \times 100\%$$

(% per year)

Low-loss fitting means any device that is intended to establish a connection between hoses, appliances, or recovery and/or recycling machines and that is designed to close automatically or to be closed manually when disconnected, minimizing the release of refrigerant from hoses, appliances, and recovery and/or recycling machines.

Low-pressure appliance means an appliance that uses a refrigerant with a liquid phase saturation pressure below 45 psia at 104 °F. Examples include but are not limited to appliances using R-11, R-123, R-113, and R-245fa.

Major maintenance, service, or repair means any maintenance, service, or repair that involves the removal of any or all of the following appliance components: compressor, condenser, evaporator, or auxiliary heat exchange coil; or any maintenance, service, or repair that involves uncovering an opening of more than four (4) square inches of “flow area” for more than 15 minutes.

Medium-pressure appliance means an appliance that uses a refrigerant with a liquid phase saturation pressure between 45 psia and 170 psia at 104 °F. Ex-

amples include but are not limited to appliances using R-114, R-124, R-12, R-134a, and R-500.

Mothball means to evacuate refrigerant from an appliance, or the affected isolated section or component of an appliance, to at least atmospheric pressure, and to temporarily shut down that appliance.

Motor vehicle air conditioner (MVAC) means any appliance that is a motor vehicle air conditioner as defined in 40 CFR part 82, subpart B.

MVAC-like appliance means a mechanical vapor compression, open-drive compressor appliance with a full charge of 20 pounds or less of refrigerant used to cool the driver’s or passenger’s compartment of off-road vehicles or equipment. This includes, but is not limited to, the air-conditioning equipment found on agricultural or construction vehicles. This definition is not intended to cover appliances using R-22 refrigerant.

Normal operating characteristics and conditions means appliance operating temperatures, pressures, fluid flows,

speeds, and other characteristics, including full charge of the appliance, that would be expected for a given process load and ambient condition during normal operation. Normal operating characteristics and conditions are marked by the absence of atypical conditions affecting the operation of the appliance.

One-time expansion device means an appliance that relies on the release of its refrigerant charge to the environment in order to provide a cooling effect. These are typically single releases but could also include products that are designed to release refrigerant to the environment through multiple individual charges.

Opening an appliance means any maintenance, service, repair, or disposal of an appliance that would release any refrigerant in the appliance to the atmosphere. Connecting and disconnecting hoses and gauges to measure pressures, add refrigerant, or recover refrigerant from the appliance are not considered "opening an appliance."

Parent company means an individual, corporation, partnership, association, joint-stock company, or an unincorporated organization that can direct or cause the direction of management and policies of another entity, through the ownership of shares or otherwise.

Person means any individual or legal entity, including an individual, corporation, partnership, association, state, municipality, political subdivision of a state, Indian tribe, and any agency, department, or instrumentality of the United States, and any officer, agent, or employee thereof.

Process stub means a length of tubing that provides access to the refrigerant inside a small appliance or room air conditioner and that can be resealed at the conclusion of repair or service.

Reclaim means to reprocess recovered refrigerant to all of the specifications in appendix A of this subpart (based on AHRI Standard 700-2016, *Specifications for Refrigerants*) that are applicable to that refrigerant and to verify that the refrigerant meets these specifications using the analytical methodology prescribed in section 5 of appendix A of this subpart.

Recover means to remove refrigerant in any condition from an appliance and to store it in an external container without necessarily testing or processing it in any way.

Recovery efficiency means the percentage of refrigerant in an appliance that is recovered by a piece of recovery and/or recycling equipment.

Recycle, when referring to refrigerant, means to extract refrigerant from an appliance (except MVACs) and clean it for reuse in equipment of the same owner without meeting all of the requirements for reclamation. In general, recycled refrigerant is cleaned using oil separation and single or multiple passes through devices, such as replaceable core filter-driers, which reduce moisture, acidity, and particulate matter.

Refrigerant means, for purposes of this subpart, any substance, including blends and mixtures, consisting in part or whole of a class I or class II ozone-depleting substance or substitute that is used for heat transfer purposes and provides a cooling effect.

Refrigerant circuit means the parts of an appliance that are normally connected to each other (or are separated only by internal valves) and are designed to contain refrigerant.

Retire, when referring to an appliance, means the removal of the refrigerant and the disassembly or impairment of the refrigerant circuit such that the appliance as a whole is rendered unusable by any person in the future.

Retrofit means to convert an appliance from one refrigerant to another refrigerant. Retrofitting includes the conversion of the appliance to achieve system compatibility with the new refrigerant and may include, but is not limited to, changes in lubricants, gaskets, filters, driers, valves, o-rings or appliance components.

Seasonal variance means the removal of refrigerant from an appliance due to a change in ambient conditions caused by a change in season, followed by the subsequent addition of an amount that is less than or equal to the amount of refrigerant removed in the prior

change in season, where both the removal and addition of refrigerant occurs within one consecutive 12-month period.

Self-contained recovery equipment means refrigerant recovery and/or recycling equipment that is capable of removing the refrigerant from an appliance without the assistance of components contained in the appliance.

Self-sealing valve means a valve affixed to a container of refrigerant that automatically seals when not dispensing refrigerant and meets or exceeds established performance criteria as identified in § 82.154(c)(2).

Small appliance means any appliance that is fully manufactured, charged, and hermetically sealed in a factory with five (5) pounds or less of refrigerant, including, but not limited to, refrigerators and freezers (designed for home, commercial, or consumer use), medical or industrial research refrigeration equipment, room air conditioners (including window air conditioners, portable air conditioners, and packaged terminal air heat pumps), dehumidifiers, under-the-counter ice makers, vending machines, and drinking water coolers.

Substitute means any chemical or product, whether existing or new, that is used as a refrigerant to replace a class I or II ozone-depleting substance. Examples include, but are not limited to hydrofluorocarbons, perfluorocarbons, hydrofluoroolefins, hydrofluoroethers, hydrocarbons, ammonia, carbon dioxide, and blends thereof. As used in this subpart, the term “exempt substitutes” refers to certain substitutes when used in certain end-uses that are specified in § 82.154(a)(1) as exempt from the venting prohibition and the requirements of this subpart, and the term “non-exempt substitutes” refers to all other substitutes and end-uses not so specified in § 82.154(a)(1).

System-dependent recovery equipment means refrigerant recovery equipment that requires the assistance of components contained in an appliance to remove the refrigerant from the appliance.

System receiver means the isolated portion of the appliance, or a specific vessel within the appliance, that is

used to hold the refrigerant charge during the servicing or repair of that appliance.

Technician means any person who in the course of maintenance, service, or repair of an appliance (except MVACs) could be reasonably expected to violate the integrity of the refrigerant circuit and therefore release refrigerants into the environment. Technician also means any person who in the course of disposal of an appliance (except small appliances, MVACs, and MVAC-like appliances) could be reasonably expected to violate the integrity of the refrigerant circuit and therefore release refrigerants from the appliances into the environment. Activities reasonably expected to violate the integrity of the refrigerant circuit include but are not limited to: Attaching or detaching hoses and gauges to and from the appliance; adding or removing refrigerant; adding or removing components; and cutting the refrigerant line. Activities such as painting the appliance, rewiring an external electrical circuit, replacing insulation on a length of pipe, or tightening nuts and bolts are not reasonably expected to violate the integrity of the refrigerant circuit. Activities conducted on appliances that have been properly evacuated pursuant to § 82.156 are not reasonably expected to release refrigerants unless the activity includes adding refrigerant to the appliance. Technicians could include but are not limited to installers, contractor employees, in-house service personnel, and owners and/or operators of appliances.

Very high-pressure appliance means an appliance that uses a refrigerant with a critical temperature below 104 °F or with a liquid phase saturation pressure above 355 psia at 104 °F. Examples include but are not limited to appliances using R-13, R-23, R-503, R-508A, and R-508B.

[58 FR 28712, May 14, 1993, as amended at 59 FR 42956, Aug. 19, 1994; 59 FR 55925, Nov. 9, 1994; 60 FR 40439, Aug. 8, 1995; 68 FR 43806, July 24, 2003; 69 FR 11978, Mar. 12, 2004; 70 FR 1991, Jan. 11, 2005; 70 FR 19278, Apr. 13, 2005; 81 FR 82349, Nov. 18, 2016]

§ 82.154 Prohibitions.

(a) *Venting prohibition.* (1) No person maintaining, servicing, repairing, or

disposing of an appliance or industrial process refrigeration may knowingly vent or otherwise release into the environment any refrigerant from such appliances. Notwithstanding any other provision of this subpart, the following substitutes in the following end-uses are exempt from this prohibition and from the requirements of this subpart:

- (i) Carbon dioxide in any application;
- (ii) Nitrogen in any application;
- (iii) Water in any application;
- (iv) Ammonia in commercial or industrial process refrigeration or in absorption units;
- (v) Chlorine in industrial process refrigeration (processing of chlorine and chlorine compounds);
- (vi) Hydrocarbons in industrial process refrigeration (processing of hydrocarbons);
- (vii) Ethane (R-170) in very low temperature refrigeration equipment and equipment for non-mechanical heat transfer;
- (viii) Propane (R-290) in retail food refrigerators and freezers (stand-alone units only); household refrigerators, freezers, and combination refrigerators and freezers; self-contained room air conditioners for residential and light commercial air-conditioning and heat pumps; vending machines; and effective January 3, 2017, self-contained commercial ice machines, very low temperature refrigeration equipment, and water coolers;
- (ix) Isobutane (R-600a) in retail food refrigerators and freezers (stand-alone units only); household refrigerators, freezers, and combination refrigerators and freezers; and vending machines;
- (x) R-441A in retail food refrigerators and freezers (stand-alone units only); household refrigerators, freezers, and combination refrigerators and freezers; self-contained room air conditioners for residential and light commercial air-conditioning; heat pumps; and vending machines.

(2) *De minimis* releases associated with good faith attempts to recycle or recover refrigerants are not subject to this prohibition. Except for exempt substitutes, refrigerant releases are *de minimis* only if they occur when:

- (i) The applicable practices in §§ 82.155 and 82.156 are observed, the applicable practices in § 82.157 are ob-

served for appliances that contain any class I or class II refrigerant or blend containing a class I or class II refrigerant, recovery and/or recycling machines that meet the requirements in § 82.158 are used whenever refrigerant is removed from an appliance, the technician certification provisions in § 82.161 are observed, and the reclamation requirements in § 82.164 are observed; or

- (ii) The requirements in subpart B of this part are observed.

(3) The knowing release of a class I or class II refrigerant or a non-exempt substitute refrigerant after its recovery from an appliance is a violation of the venting prohibition.

(b) No person may maintain, service, repair, or dispose of an appliance containing a class I or class II refrigerant or a non-exempt substitute refrigerant without:

- (1) Observing the applicable practices in § 82.155, § 82.156, and § 82.157; and

(2) Using recovery and/or recycling equipment that is certified for that type of refrigerant and appliance under § 82.158.

(c) *Sales Restriction.* (1) No person may sell or distribute, or offer for sale or distribution, any substance that consists in whole or in part of a class I or class II substance or, starting on January 1, 2018, any non-exempt substitute for use as a refrigerant unless:

- (i) The buyer has been certified as a Type I, Type II, Type III, or Universal technician under § 82.161;

(ii) The buyer employs at least one technician who is certified as a Type I, Type II, Type III, or Universal technician under § 82.161 and provides proof of such to the seller;

(iii) The buyer has been certified in accordance with 40 CFR part 82, subpart B and the refrigerant is acceptable for use in MVACs under 40 CFR part 82, subpart G;

(iv) The buyer employs at least one person who is certified under 40 CFR part 82, subpart B, and provides proof of such to the seller and the refrigerant is acceptable for use in MVACs under 40 CFR part 82, subpart G. Nothing in this provision relieves persons of the requirements of § 82.34(b) or § 82.42(b);

(v) The refrigerant is sold only for eventual resale to persons certified under § 82.161 or 40 CFR part 82, subpart

B or to appliance manufacturers (*e.g.*, sold by a manufacturer to a wholesaler, sold by a technician to a reclaimer);

(vi) The refrigerant is sold to an appliance manufacturer;

(vii) The refrigerant is contained in an appliance with a fully assembled refrigerant circuit or an appliance component;

(viii) The refrigerant is charged into an appliance by a certified technician or an apprentice during maintenance, service, or repair of the appliance; or

(ix) The non-exempt substitute refrigerant is intended for use in an MVAC and is sold in a container designed to hold two pounds or less of refrigerant, has a unique fitting, and, if manufactured or imported on or after January 1, 2018, has a self-sealing valve that complies with the requirements of paragraph (c)(2) of this section.

(2) *Self-sealing valve specifications.* This provision applies starting January 1, 2018, for all containers holding two pounds or less of non-exempt substitute refrigerant for use in an MVAC that are manufactured or imported on or after that date.

(i) Each container holding two pounds or less of non-exempt substitute refrigerant for use in an MVAC must be equipped with a single self-sealing valve that automatically closes and seals when not dispensing refrigerant.

(ii) The leakage rate from each container must not exceed 3.00 grams per year when the self-sealing valve is closed. This leakage rate applies to new, full containers as well as containers that may be partially full.

(iii) The leakage rate must be determined using the standards described in appendix E (incorporated by reference, see § 82.168).

(iv) All testing to demonstrate compliance with this paragraph must be conducted by an independent test laboratory in the United States. For purposes of this requirement, an independent test laboratory is one that is not owned, operated, or affiliated with the applicant certifying equipment and/or products.

(3) *Recordkeeping.* (i) Persons who sell or distribute, or offer to sell or distribute, any class I or class II refrigerant, or, starting on January 1, 2018,

any non-exempt substitute refrigerant must keep invoices that indicate the name of the purchaser, the date of sale, and the quantity of refrigerant purchased unless they are selling exempt substitutes (those substitutes used in the end-uses specified as exempt in paragraph (a)(1) of this section) or small cans of MVAC refrigerant in accordance with paragraph (c)(1)(ix) of this section. In instances where the buyer employs a person certified under § 82.161 or 40 CFR part 82, subpart B, the seller must keep the documentation provided by the buyer to demonstrate such employment. All records must be kept for three years.

(ii) Electronic or paper copies of all records described in appendix E must be maintained by manufacturers of containers holding two pounds or less of non-exempt substitute refrigerant for use in an MVAC to verify self-sealing valves meet the requirements specified in paragraph (c)(2) of this section. All records must be kept for three years after each purchase.

(d) *Sale of Used Refrigerant.* No person may sell or distribute, or offer for sale or distribution, for use as a refrigerant any class I or class II substance or non-exempt substitute consisting wholly or in part of used refrigerant unless the refrigerant:

(1) Has been reclaimed by a person who has been certified as a reclaimer under § 82.164;

(2) was used only in an MVAC or MVAC-like appliance and is to be used only in an MVAC or MVAC-like appliance and recycled in accordance with 40 CFR part 82, subpart B;

(3) is contained in an appliance that is sold or offered for sale together with a fully assembled refrigerant circuit;

(4) is being transferred between or among a parent company and one or more of its subsidiaries, or between or among subsidiaries having the same parent company; or

(5) is being transferred between or among a Federal agency or department and a facility or facilities owned by the same Federal agency or department.

(e) *Manufacture and Sale of Appliances.* (1) No person may sell or distribute, or offer for sale or distribution, any appliance (except small appliances and appliances containing only

refrigerants that have been exempted under paragraph (a)(1) of this section) unless it is equipped with a servicing aperture to facilitate the removal of refrigerant at servicing and disposal.

(2) No person may sell or distribute, or offer for sale or distribution, any small appliance (except appliances containing only refrigerants that have been exempted under paragraph (a)(1) of this section) unless it is equipped with a process stub to facilitate the removal of refrigerant at servicing and disposal.

(f) *One-time expansion devices.* No person may manufacture or import a one-time expansion device unless the only refrigerants it contains have been exempted under paragraph (a)(1) of this section.

(g) Rules stayed for consideration. Notwithstanding any other provisions of this subpart, the effectiveness of 40 CFR 82.154(c), only as it applies to refrigerant contained in appliances without fully assembled refrigerant circuits, is stayed from April 27, 1995, until EPA takes final action on its reconsideration of these provisions. EPA will publish any such final action in the FEDERAL REGISTER.

[81 FR 82352, Nov. 18, 2016, as amended at 81 FR 86881, Dec. 1, 2016; 82 FR 61184, Dec. 27, 2017; 85 FR 14171, Apr. 10, 2020]

EFFECTIVE DATE NOTE: At 89 FR 50463, June 13, 2024, § 82.154 was amended by revising paragraph (a)(1)(viii), effective July 15, 2024. For the convenience of the user, the revised text is set forth as follows:

§ 82.154 Prohibitions.

(a) * * *

(1) * * *

(viii) Propane (R-290) in retail food refrigerators and freezers—stand-alone units; household refrigerators, freezers, and combination refrigerators and freezers; self-contained room air conditioners for residential and light commercial air-conditioning and heat pumps; vending machines; self-contained commercial ice machines, very low temperature refrigeration equipment, and water coolers; and effective July 15, 2024, retail food refrigeration—refrigerated food processing and dispensing equipment;

* * * * *

§ 82.155 Safe disposal of appliances.

Until January 1, 2018, this section applies only to disposal of appliances con-

taining class I and class II refrigerants. Starting on January 1, 2018, this section applies to disposal of appliances containing any class I or class II refrigerant or any non-exempt substitute refrigerant.

(a) Persons recovering refrigerant from a small appliance, MVAC, or MVAC-like appliance for purposes of disposal of these appliances must evacuate refrigerant to the levels in § 82.156(b) through (d) using recovery equipment that meets the standards in § 82.158(e) through (g), or 40 CFR part 82 subpart B, as applicable.

(b) The final processor—i.e., persons who take the final step in the disposal process (including but not limited to scrap recyclers and landfill operators) of a small appliance, MVAC, or MVAC-like appliance—must either:

(1) Recover any remaining refrigerant from the appliance in accordance with paragraph (a) of this section; or

(2) Verify using a signed statement or a contract that all refrigerant that had not leaked previously has been recovered from the appliance or shipment of appliances in accordance with paragraph (a) of this section. If using a signed statement, it must include the name and address of the person who recovered the refrigerant and the date the refrigerant was recovered. If using a signed contract between the supplier and the final processor, it must either state that the supplier will recover any remaining refrigerant from the appliance or shipment of appliances in accordance with paragraph (a) of this section prior to delivery or verify that the refrigerant had been properly recovered prior to receipt by the supplier.

(i) It is a violation of this subpart to accept a signed statement or contract if the person receiving the statement or contract knew or had reason to know that the signed statement or contract is false.

(ii) The final processor must notify suppliers of appliances that refrigerant must be properly recovered in accordance with paragraph (a) of this section before delivery of the items to the facility. The form of this notification may be signs, letters to suppliers, or other equivalent means.

(iii) If all the refrigerant has leaked out of the appliance, the final processor must obtain a signed statement that all the refrigerant in the appliance had leaked out prior to delivery to the final processor and recovery is not possible. “Leaked out” in this context means those situations in which the refrigerant has escaped because of system failures, accidents, or other unavoidable occurrences not caused by a person’s negligence or deliberate acts such as cutting refrigerant lines.

(c) *Recordkeeping.* The final processor of a small appliance, MVAC, or MVAC-like appliance must keep a copy of all the signed statements or contracts obtained under paragraph (b)(2) of this section on site, in hard copy or in electronic format, for three years.

[81 FR 82353, Nov. 18, 2016]

§ 82.156 Proper evacuation of refrigerant from appliances.

Until January 1, 2018, this section applies only to evacuation of refrigerant from appliances containing class I or class II refrigerants. Starting on January 1, 2018, this section applies to evacuation of refrigerant from appliances containing any class I or class II refrigerant or any non-exempt substitute refrigerant, excluding paragraph (i) of this section which applies only to appliances containing class I or class II refrigerants until January 1, 2019. Starting January 1, 2019, the provisions in § 82.157 apply in lieu of paragraph (i) of this section.

(a) *Appliances (except small appliances, MVACs, and MVAC-like appliances).* Before opening appliances (except small appliances, MVACs, and MVAC-like appliances) or disposing of such appliances, technicians must evacuate the refrigerant, including all the liquid refrigerant, to the levels in Table 1 using a recovery and/or recycling machine certified pursuant to § 82.158 unless the situations in paragraphs (a)(1) or (2) of this section apply. Technicians may evacuate either the entire appliance or the part to be serviced, if the refrigerant in the part can be isolated to a system receiver. A technician must verify that the applicable level of evacuation has been reached in the appliance or the part before it is opened.

(1) If evacuation of the appliance to the atmosphere is not to be performed after completion of the maintenance, service, or repair, and if the maintenance, service, or repair is not major as defined at § 82.152, the appliance must:

(i) Be evacuated to a pressure no higher than 0 psig before it is opened if it is a medium-, high- or very high-pressure appliance;

(ii) Be pressurized to a pressure no higher than 0 psig before it is opened if it is a low-pressure appliance. Persons must cover openings when isolation is not possible. Persons pressurizing low-pressure appliances that use refrigerants with boiling points at or below 85 degrees Fahrenheit at 29.9 inches of mercury (standard atmospheric pressure), must not use methods such as nitrogen that require subsequent purging. Persons pressurizing low-pressure appliances that use refrigerants with boiling points above 85 degrees Fahrenheit at 29.9 inches of mercury, must use heat to raise the internal pressure of the appliance as much as possible, but may use nitrogen to raise the internal pressure of the appliance from the level attainable through use of heat to atmospheric pressure; or

(iii) For the purposes of oil changes, be evacuated or pressurized to a pressure no higher than 5 psig, before it is opened; or drain the oil into a system receiver to be evacuated or pressurized to a pressure no higher than 5 psig.

(2) If leaks in the appliance make evacuation to the levels in Table 1 unattainable or would substantially contaminate the refrigerant being recovered, persons opening or disposing of the appliance must:

(i) Isolate leaking from non-leaking components wherever possible;

(ii) Evacuate non-leaking components to be opened or disposed of to the levels specified in Table 1; and

(iii) Evacuate leaking components to be opened or disposed of to the lowest level that can be attained without substantially contaminating the refrigerant. This level may not exceed 0 psig.

(3) *Recordkeeping.* As of January 1, 2018, technicians evacuating refrigerant from appliances with a full charge of more than 5 and less than 50 pounds of refrigerant for purposes of disposal of that appliance must keep

Environmental Protection Agency

§ 82.156

records documenting the following for three years:

(i) The company name, location of the appliance, date of recovery, and type of refrigerant recovered for each appliance;

(ii) The total quantity of refrigerant, by type, recovered from all disposed appliances in each calendar month; and

(iii) The quantity of refrigerant, by type, transferred for reclamation and/or destruction, the person to whom it was transferred, and the date of transfer.

TABLE 1—REQUIRED LEVELS OF EVACUATION FOR APPLIANCES
[Except for small appliances, MVACs, and MVAC-like appliances]

Type of appliance	Inches of Hg vacuum (relative to standard atmospheric pressure of 29.9 inches Hg)	
	Using recovery and/or recycling equipment manufactured or imported before November 15, 1993	Using recovery and/or recycling equipment manufactured or imported on or after November 15, 1993
Very high-pressure appliance	0	0.
High-pressure appliance, or isolated component of such appliance, with a full charge of less than 200 pounds of refrigerant.	0	0.
High-pressure appliance, or isolated component of such appliance, with a full charge of 200 pounds or more of refrigerant.	4	10.
Medium-pressure appliance, or isolated component of such appliance, with a full charge of less than 200 pounds of refrigerant.	4	10.
Medium-pressure appliance, or isolated component of such appliance, with a full charge of 200 pounds or more of refrigerant.	4	15.
Low-pressure appliance	25 mm Hg absolute	25 mm Hg absolute.

(b) *Small appliances.* Before opening a small appliance or when disposing of a small appliance, persons must recover refrigerant, using a recovery and/or recycling machine certified pursuant to § 82.158, according to the following conditions:

(1) When using recovery equipment manufactured before November 15, 1993, recover 80 percent of the refrigerant in the small appliance; or

(2) When using recovery equipment manufactured on or after November 15, 1993, recover 90 percent of the refrigerant in the appliance when the compressor in the appliance is functioning, or 80 percent of the refrigerant in the appliance when the compressor in the appliance is not functioning; or

(3) Evacuate the appliance to four inches of mercury vacuum.

(c) *MVAC-like appliances.* Persons may only open MVAC-like appliances while properly using, as defined at § 82.32(e), recovery and/or recycling equipment certified pursuant to § 82.158(f) or § 82.36, as applicable. All persons recovering refrigerant from MVAC-like appliances for purposes of

disposal of these appliances must evacuate the appliance in accordance with 40 CFR part 82, subpart B or reduce the system pressure to or below 102 mm of mercury vacuum.

(d) *MVACs.* All persons recovering refrigerant from MVACs for purposes of disposal of these appliances must evacuate the appliance in accordance with 40 CFR part 82, subpart B or reduce the system pressure to or below 102 mm of mercury vacuum.

(e) System-dependent equipment may not be used with appliances with a full charge of more than 15 pounds of refrigerant, unless the system-dependent equipment is permanently attached to the appliance as a pump-out unit.

(f) Persons who maintain, service, repair, or dispose of only appliances that they own and that contain pump-out units are exempt from the requirement to use certified, self-contained recovery and/or recycling equipment.

(g) All recovery and/or recycling equipment must be used in accordance with the manufacturer's directions unless such directions conflict with the requirements of this subpart.

(h) Refrigerant may be returned to the appliance from which it is recovered or to another appliance owned by the same person without being recycled or reclaimed, unless the appliance is an MVAC or MVAC-like appliance.

(i) The provisions in this paragraph (i) apply to owners and operators of appliances containing 50 or more pounds of class I and class II refrigerants only until January 1, 2019. The definitions in paragraph (j) of this section apply for purposes of this paragraph (i) in lieu of the definitions in § 82.152.

(1) Owners or operators of commercial refrigeration equipment normally containing more than 50 pounds of refrigerant must have leaks repaired in accordance with paragraph (i)(9) of this section, if the appliance is leaking at a rate such that the loss of refrigerant will exceed 35 percent of the total charge during a 12-month period, except as described in paragraphs (i)(6), (i)(8), and (i)(10) of this section and paragraphs (i)(1)(i), (i)(1)(ii), and (i)(1)(iii) of this section. Repairs must bring the annual leak rate to below 35 percent.

(i) If the owners or operators of the federally-owned commercial refrigerant appliances determine that the leaks cannot be repaired in accordance with paragraph (i)(9) of this section and that an extension in accordance with the requirements discussed in this paragraph (i)(1)(i) of this section apply, they must document all repair efforts, and notify EPA of their inability to comply within the 30-day repair requirement, and the reason for the inability must be submitted to EPA in accordance with § 82.166(n). Such notification must be made within 30 days of discovering the leaks. EPA will determine if the extension requested in accordance with the requirements discussed in paragraph (i)(1)(i) of this section is justified. If the extension is not justified, EPA will notify the owner/operator within 30 days of receipt of the notification.

(ii) Owners or operators of federally-owned commercial refrigeration equipment may have more than 30 days to repair leaks if the refrigeration appliance is located in an area subject to radiological contamination or where the shutting down of the appliance will di-

rectly lead to radiological contamination. Only the additional time needed to conduct and complete repairs in a safe working environment will be permitted.

(iii) Owners or operators of federally-owned commercial refrigeration equipment requesting or who are granted time extensions under this paragraph must comply with paragraphs (i)(3) and (i)(4) of this section.

(2) The owners or operators of industrial process refrigeration equipment normally containing more than 50 pounds of refrigerant must have leaks repaired if the appliance is leaking at a rate such that the loss of refrigerant will exceed 35 percent of the total charge during a 12-month period in accordance with paragraph (i)(9) of this section, except as described in paragraphs (i)(6), (i)(7) and (i)(10) of this section, and paragraphs (i)(2)(i) and (i)(2)(ii) of this section. Repairs must bring annual leak rates to below 35 percent during a 12-month period. If the owners or operators of the industrial process refrigeration equipment determine that the leak rate cannot be brought to below 35 percent during a 12-month period within 30 days (or 120 days, where an industrial process shutdown in accordance with paragraph (i)(2)(ii) of this section is required,) and in accordance with paragraph (i)(9) of this section, and that an extension in accordance with the requirements discussed in this paragraph apply, the owners or operators of the appliance must document all repair efforts, and notify EPA of the reason for the inability in accordance with § 82.166(n) within 30 days of making this determination. Owners or operators who obtain an extension pursuant to this section or elect to utilize the additional time provided in paragraph (i)(2)(i) of this section, must conduct all necessary leak repairs, if any, that do not require any additional time beyond the initial 30 or 120 days.

(i) The owners or operators of industrial process refrigeration equipment are permitted more than 30 days (or 120 days where an industrial process shutdown in accordance with paragraph (i)(2)(ii) of this section is required) to repair leaks, if the necessary parts are unavailable or if requirements of other

applicable federal, state, or local regulations make a repair within 30 or 120 days impossible. Only the additional time needed to receive delivery of the necessary parts or to comply with the pertinent regulations will be permitted.

(ii) Owners or operators of industrial process refrigeration equipment will have a 120-day repair period, rather than a 30-day repair period, to repair leaks in instances where an industrial process shutdown is needed to repair a leak or leaks from industrial process refrigeration equipment.

(3) Owners or operators of industrial process refrigeration equipment and owners or operators of federally-owned commercial refrigeration equipment or of federally-owned comfort cooling appliances who are granted additional time under paragraphs (i)(1) or (i)(5) of this section, must have repairs performed in a manner that sound professional judgment indicates will bring the leak rate below the applicable allowable leak rate. When an industrial process shutdown has occurred or when repairs have been made while an appliance is mothballed, the owners or operators shall conduct an initial verification test at the conclusion of the repairs and a follow-up verification test. The follow-up verification test shall be conducted within 30 days of completing the repairs or within 30 days of bringing the appliance back on-line, if taken off-line, but no sooner than when the appliance has achieved normal operating characteristics and conditions. When repairs have been conducted without an industrial process shutdown or system mothballing, an initial verification test shall be conducted at the conclusion of the repairs, and a follow-up verification test shall be conducted within 30 days of the initial verification test. In all cases, the follow-up verification test shall be conducted at normal operating characteristics and conditions, unless sound professional judgment indicates that tests performed at normal operating characteristics and conditions will produce less reliable results, in which case the follow-up verification test shall be conducted at or near the normal operating pressure where practicable, and at or

near the normal operating temperature where practicable.

(i) If the owners or operators of industrial process refrigeration equipment takes the appliance off-line, or if the owners or operators of federally-owned commercial refrigeration or of federally-owned comfort cooling appliances who are granted additional time under paragraphs (i)(1) or (i)(5) of this section take the appliance off-line, they cannot bring the appliance back on-line until an initial verification test indicates that the repairs undertaken in accordance with paragraphs (i)(1)(i), (ii), (iii), or (i)(2)(i) and (ii), or (5)(i), (ii), and (iii) of this section have been successfully completed, demonstrating the leak or leaks are repaired. The owners or operators of the industrial process refrigeration equipment, federally-owned commercial refrigeration appliances, or federally-owned comfort cooling appliances are exempted from this requirement only where the owners or operators will retrofit or retire the industrial process refrigeration equipment, federally-owned commercial refrigeration appliance, or federally-owned comfort cooling appliance in accordance with paragraph (i)(6) of this section. Under this exemption, the owner or operators may bring the industrial process refrigeration equipment, federally-owned commercial refrigeration appliance, or federally-owned comfort cooling appliance back on-line without successful completion of an initial verification test.

(ii) If the follow-up verification test indicates that the repairs to industrial process refrigeration equipment, federally-owned commercial refrigeration equipment, or federally-owned comfort cooling appliances have not been successful, the owner or operator must retrofit or retire the equipment in accordance with paragraph (i)(6) and any such longer time period as may apply under paragraphs (i)(7)(i), (ii) and (iii) or (i)(8)(i) and (ii) of this section. The owners and operators of the industrial process refrigeration equipment, federally-owned commercial refrigeration equipment, or federally-owned comfort cooling appliances are relieved of this requirement if the conditions of paragraphs (i)(3)(iv) and/or (i)(3)(v) of this section are met.

(iii) The owner or operator of industrial process refrigeration equipment that fails a follow-up verification test must notify EPA within 30 days of the failed follow-up verification test in accordance with § 82.166(n).

(iv) The owner or operator is relieved of the obligation to retrofit or replace the industrial process refrigeration equipment as discussed in paragraph (i)(6) of this section if second repair efforts to fix the same leaks that were the subject of the first repair efforts are successfully completed within 30 days or 120 days where an industrial process shutdown is required, after the initial failed follow-up verification test. The second repair efforts are subject to the same verification requirements of paragraphs (i)(3), (i)(3)(i) and (ii) of this section. The owner or operator is required to notify EPA within 30 days of the successful follow-up verification test in accordance with § 82.166(n) and the owner or operator is no longer subject to the obligation to retrofit or replace the appliance that arose as a consequence of the initial failure to verify that the leak repair efforts were successful.

(v) The owner or operator of industrial process refrigeration equipment is relieved of the obligation to retrofit or replace the equipment in accordance with paragraph (i)(6) of this section if within 180 days of the initial failed follow-up verification test, the owner or operator establishes that the appliance's annual leak rate does not exceed the applicable allowable annual leak rate, in accordance with paragraph (i)(4) of this section. If the appliance's owner or operator establishes that the appliance's annual leak rate does not exceed the applicable allowable annual leak rate, the owner or operator is required to notify EPA within 30 days of that determination in accordance with § 82.166(n) and the owner or operator would no longer be subject to the obligation to retrofit or replace the equipment that arose as a consequence of the initial failure to verify that the leak repair efforts were successful.

(4) In the case of a failed follow-up verification test subject to paragraph (i)(3)(v) of this section, the determination of whether industrial process refrigeration equipment has an annual

leak rate that exceeds the applicable allowable annual leak rate will be made in accordance with parameters identified by the owner or operator in its notice to EPA regarding the failure of the initial follow-up verification test, if those parameters are acceptable to EPA; otherwise by parameters selected by EPA. The determination must be based on the full charge for the affected industrial process refrigeration equipment. The leak rate determination parameters in the owner's or operator's notice will be considered acceptable unless EPA notifies the owners or operators within 30 days of receipt of the notice. Where EPA does not accept the parameters identified by the owner or operator in its notice, EPA will not provide additional time beyond the additional time permitted in paragraph (i)(3)(v) of this section unless specifically stated in the parameters selected by EPA.

(5) Owners or operators of comfort cooling appliances normally containing more than 50 pounds of refrigerant and not covered by paragraph (i)(1) or (i)(2) of this section must have leaks repaired in accordance with paragraph (i)(9) of this section if the appliance is leaking at a rate such that the loss of refrigerant will exceed 15 percent of the total charge during a 12-month period, except as described in paragraphs (i)(6), (i)(8) and (i)(10) of this section and paragraphs (i)(5)(i), (i)(5)(ii) and (i)(5)(iii) of this section. Repairs must bring the annual leak rate to below 15 percent.

(i) If the owners or operators of federally-owned comfort-cooling appliances determine that the leaks cannot be repaired in accordance with paragraph (i)(9) of this section and that an extension in accordance with the requirements discussed in paragraph (i)(5) of this section apply, they must document all repair efforts, and notify EPA of their inability to comply within the 30-day repair requirement, and the reason for the inability must be submitted to EPA in accordance with § 82.166(n). Such notification must be made within 30 days of discovering that leak repair efforts cannot be completed within 30 days.

(ii) Owners or operators of federally-owned comfort-cooling appliances may

have more than 30 days to repair leaks where the refrigeration appliance is located in an area subject to radiological contamination or where the shutting down of the appliance will directly lead to radiological contamination. Only the additional time needed to conduct and complete work in a safe environment will be permitted.

(iii) Owners or operators of federally-owned comfort-cooling appliances requesting, or who are granted, time extensions under this paragraph must comply with paragraphs (i)(3) and (i)(4) of this section.

(6) Owners or operators are not required to repair leaks as provided in paragraphs (i)(1), (i)(2), and (i)(5) of this section if, within 30 days of discovering a leak greater than the applicable allowable leak rate, or within 30 days of a failed follow-up verification test, or after making good faith efforts to repair the leaks as described in paragraph (i)(6)(i) of this section, they develop a one-year retrofit or retirement plan for the leaking appliance. Owners or operators who decide to retrofit the appliance must use a refrigerant or substitute with a lower or equivalent ozone-depleting potential than the previous refrigerant and must include such a change in the retrofit plan. Owners or operators who retire and replace the appliance must replace the appliance with an appliance that uses a refrigerant or substitute with a lower or equivalent ozone-depleting potential and must include such a change in the retirement plan. The retrofit or retirement plan (or a legible copy) must be kept at the site of the appliance. The original plan must be made available for EPA inspection upon request. The plan must be dated, and all work performed in accordance with the plan must be completed within one year of the plan's date, except as described in paragraphs (i)(6)(i), (i)(7), and (i)(8) of this section. Owners or operators are temporarily relieved of this obligation if the appliance has undergone system mothballing as defined in § 82.152.

(i) If the owner or operator has made good faith efforts to repair leaks from the appliance in accordance with paragraphs (i)(1), (i)(2), or (i)(5) of this section and has decided prior to completing a follow-up verification test, to

retrofit or retire the appliance in accordance with paragraph (i)(6) of this section, the owner or operator must develop a retrofit or retirement plan within 30 days of the decision to retrofit or retire the appliance. The owner or operator must complete the retrofit or retirement of the appliance within one year and 30 days of when the owner or operator discovered that the leak rate exceeded the applicable allowable leak rate, except as provided in paragraphs (i)(7) and (i)(8) of this section.

(ii) In all cases, subject to paragraph (i)(6)(i) of this section, the written plan shall be prepared no later than 30 days after the owner or operator has determined to proceed with retrofitting or retiring the appliance. All reports required under § 82.166(o) shall be due at the time specified in the paragraph imposing the specific reporting requirement, or no later than 30 days after the decision to retrofit or retire the appliance, whichever is later.

(iii) In cases where the owner or operator of industrial process refrigeration equipment has made good faith efforts to retrofit or retire industrial process refrigeration equipment prior to August 8, 1995, and where these efforts are not complete, the owner or operator must develop a retrofit or retirement plan that will complete the retrofit or retirement of the affected appliance by August 8, 1996. This plan (or a legible copy) must be kept at the site of the appliance. The original must be made available for EPA inspection upon request. Where the conditions of paragraphs (i)(7) and (i)(8) of this section apply, and where the length of time necessary to complete the work is beyond August 8, 1996, all records must be submitted to EPA in accordance with § 82.166(o), as well as maintained on-site.

(7) The owners or operators of industrial process refrigeration equipment will be allowed additional time to complete the retrofit or retirement of industrial process refrigeration equipment if the conditions described in paragraphs (i)(7)(i) or (i)(7)(ii) of this section are met. The owners or operators of industrial process refrigeration equipment will be allowed additional

time beyond the additional time provided in paragraph (i)(7)(ii) of this section if the conditions described in paragraph (i)(7)(iii) of this section are met.

(i) Additional time, to the extent reasonably necessary will be allowed for retrofitting or retiring industrial process refrigeration equipment due to delays occasioned by the requirements of other applicable federal, state, or local laws or regulations, or due to the unavailability of a suitable replacement refrigerant with a lower ozone depletion potential. If these circumstances apply, the owner or operator of the facility must notify EPA within six months after the 30-day period following the discovery of an exceedance of the 35 percent leak rate. Records necessary to allow EPA to determine that these provisions apply and the length of time necessary to complete the work must be submitted to EPA in accordance with § 82.166(o), as well as maintained on-site. EPA will notify the owner or operator of its determination within 60 days of receipt of the submittal.

(ii) An additional one-year period beyond the initial one-year retrofit period is allowed for industrial process refrigeration equipment where the following criteria are met:

(A) The new or the retrofitted industrial process refrigerant equipment is custom-built;

(B) The supplier of the appliance or one or more of its critical components has quoted a delivery time of more than 30 weeks from when the order is placed;

(C) The owner or operator notifies EPA within six months of the expiration of the 30-day period following the discovery of an exceedance of the 35 percent leak rate to identify the owner or operator, describe the appliance involved, explain why more than one year is needed, and demonstrate that the first two criteria are met in accordance with § 82.166(o); and

(D) The owner or operator maintains records that are adequate to allow a determination that the criteria are met.

(iii) The owners or operators of industrial process refrigeration equipment may request additional time to complete retrofitting or retiring indus-

trial process refrigeration equipment beyond the additional one-year period if needed and where the initial additional one year was granted in accordance with paragraph (i)(7)(ii) of this section. The request shall be submitted to EPA before the end of the ninth month of the first additional year and shall include revisions of information required under § 82.166(o). Unless EPA objects to this request submitted in accordance with § 82.166(o) within 30 days of receipt, it shall be deemed approved.

(8) Owners or operators of federally-owned commercial or comfort-cooling appliances will be allowed an additional year to complete the retrofit or retirement of the appliances if the conditions described in paragraph (i)(8)(i) of this section are met, and will be allowed one year beyond the additional year if the conditions in paragraph (i)(8)(ii) of this section are met.

(i) Up to one additional one-year period beyond the initial one-year retrofit period is allowed for such equipment where the following criteria are met:

(A) Due to complications presented by the federal agency appropriations and/or procurement process, a delivery time of more than 30 weeks from the beginning of the official procurement process is quoted, or where the appliance is located in an area subject to radiological contamination and creating a safe working environment will require more than 30 weeks;

(B) The operator notifies EPA within six months of the expiration of the 30-day period following the discovery of an exceedance of the applicable allowable annual leak rate to identify the operator, describe the appliance involved, explain why more than one year is needed, and demonstrate that the first criterion is met in accordance with § 82.166(o); and

(C) The operator maintains records adequate to allow a determination that the criteria are met.

(ii) The owners or operators of federally-owned commercial or comfort-cooling appliances may request additional time to complete retrofitting, replacement or retiring such appliances beyond the additional one-year period if needed and where the initial

additional one year was granted in accordance with paragraph (i)(8)(i) of this section. The request shall be submitted to EPA before the end of the ninth month of the first additional year and shall include revisions of information earlier submitted as required under § 82.166(o). Unless EPA objects to this request submitted in accordance with § 82.166(o) within 30 days of receipt, it shall be deemed approved.

(9) Owners or operators must repair leaks pursuant to paragraphs (i)(1), (i)(2) and (i)(5) of this section within 30 days after discovery, or within 30 days after when the leaks should have been discovered if the owners intentionally shielded themselves from information which would have revealed a leak, unless granted additional time pursuant to § 82.156(i).

(10) The amount of time for owners and operators to complete repairs, retrofit plans or retrofits/replacements/retirements under paragraphs (i)(1), (i)(2), (i)(5), (i)(6), (i)(7), (i)(8), and (i)(9) of this section is temporarily suspended at the time an appliance is mothballed as defined in § 82.152. The time for owners and operators to complete repairs, retrofit plans, or retrofits/replacements will resume on the day the appliance is brought back online and is no longer considered mothballed. All initial and follow-up verification tests must be performed in accordance with paragraphs (i)(3), (i)(3)(i), and (i)(3)(ii) of this section.

(11) In calculating annual leak rates, purged refrigerant that is destroyed at a verifiable destruction efficiency of 98 percent or greater will not be counted toward the leak rate. Owners or operators destroying purged refrigerants must maintain information as set forth in § 82.166(p)(1) and submit to EPA, within 60 days after the first time such exclusion is used by that facility, information set forth in § 82.166(p)(2).

(j) *Definitions for the leak repair provisions in 82.156(i).* These definitions are not applicable to any other portion of subpart F other than 82.156(i). Along with paragraph (i) of this section, the definitions in this section apply only until January 1, 2019.

Appliance means, for the purposes of paragraph (i) of this section, any device which contains and uses a refrigerant

and which is used for household or commercial purposes, including any air conditioner, refrigerator, chiller, or freezer.

Commercial refrigeration means, for the purposes of paragraph (i) of this section, the refrigeration appliances utilized in the retail food and cold storage warehouse sectors. Retail food includes the refrigeration equipment found in supermarkets, convenience stores, restaurants and other food service establishments. Cold storage includes the equipment used to store meat, produce, dairy products, and other perishable goods. All of the equipment contains large refrigerant charges, typically over 75 pounds.

Critical component means, for the purposes of paragraph (i) of this section, a component without which industrial process refrigeration equipment will not function, will be unsafe in its intended environment, and/or will be subject to failures that would cause the industrial process served by the refrigeration appliance to be unsafe.

Custom-built means, for the purposes of paragraph (i) of this section, that the equipment or any of its critical components cannot be purchased and/or installed without being uniquely designed, fabricated and/or assembled to satisfy a specific set of industrial process conditions.

Follow-up verification test means, for the purposes of paragraph (i) of this section, those tests that involve checking the repairs within 30 days of the appliance's returning to normal operating characteristics and conditions. Follow-up verification tests for appliances from which the refrigerant charge has been evacuated means a test conducted after the appliance or portion of the appliance has resumed operation at normal operating characteristics and conditions of temperature and pressure, except in cases where sound professional judgment dictates that these tests will be more meaningful if performed prior to the return to normal operating characteristics and conditions. A follow-up verification test with respect to repairs conducted without evacuation of the refrigerant charge means a reverification test conducted after the initial verification

test and usually within 30 days of normal operating conditions. Where an appliance is not evacuated, it is only necessary to conclude any required changes in pressure, temperature or other conditions to return the appliance to normal operating characteristics and conditions.

Full charge means, for the purposes of paragraph (i) of this section, the amount of refrigerant required for normal operating characteristics and conditions of the appliance as determined by using one or a combination of the following four methods:

(i) Use the equipment manufacturer's determination of the correct full charge for the equipment;

(ii) Determine the full charge by making appropriate calculations based on component sizes, density of refrigerant, volume of piping, and other relevant considerations;

(iii) Use actual measurements of the amount of refrigerant added or evacuated from the appliance; and/or

(iv) Use an established range based on the best available data regarding the normal operating characteristics and conditions for the appliance, where the midpoint of the range will serve as the full charge, and where records are maintained in accordance with § 82.166(q).

Industrial process refrigeration means, for the purposes of paragraph (i) of this section, complex customized appliances used in the chemical, pharmaceutical, petrochemical and manufacturing industries. These appliances are directly linked to the industrial process. This sector also includes industrial ice machines, appliances used directly in the generation of electricity, and ice rinks. Where one appliance is used for both industrial process refrigeration and other applications, it will be considered industrial process refrigeration equipment if 50 percent or more of its operating capacity is used for industrial process refrigeration.

Industrial process shutdown means, for the purposes of paragraph (i) of this section, that an industrial process or

facility temporarily ceases to operate or manufacture whatever is being produced at that facility.

Initial verification test means, for the purposes of paragraph (i) of this section, those leak tests that are conducted as soon as practicable after the repair is completed. An initial verification test, with regard to the leak repairs that require the evacuation of the appliance or portion of the appliance, means a test conducted prior to the replacement of the full refrigerant charge and before the appliance or portion of the appliance has reached operation at normal operating characteristics and conditions of temperature and pressure. An initial verification test with regard to repairs conducted without the evacuation of the refrigerant charge means a test conducted as soon as practicable after the conclusion of the repair work.

Leak rate means, for the purposes of paragraph (i) of this section, the rate at which an appliance is losing refrigerant, measured between refrigerant charges. The leak rate is expressed in terms of the percentage of the appliance's full charge that would be lost over a 12-month period if the current rate of loss were to continue over that period. The rate is calculated using only one of the following methods for all appliances located at an operating facility.

(i) Method 1. (A) Step 1. Take the number of pounds of refrigerant added to the appliance to return it to a full charge and divide it by the number of pounds of refrigerant the appliance normally contains at full charge;

(B) Step 2. Take the shorter of the number of days that have passed since the last day refrigerant was added or 365 days and divide that number by 365 days;

(C) Step 3. Take the number calculated in Step 1. and divide it by the number calculated in Step 2.; and

(D) Step 4. Multiply the number calculated in Step 3. by 100 to calculate a percentage. This method is summarized in the following formula:

$$\text{Leak rate} = \frac{\text{pounds of refrigerant added}}{\text{pounds of refrigerant in full charge}} \times \frac{365 \text{ days/year}}{\text{shorter of: \# days since refrigerant last added or 365 days}} \times 100\%$$

(% per year)

(ii) Method 2. (A) Step 1. Take the sum of the quantity of refrigerant added to the appliance over the previous 365-day period (or over the period that has passed since leaks in the appliance were last repaired, if that period is less than one year),

(B) Step 2. Divide the result of Step 1. by the quantity (*e.g.*, pounds) of refrigerant the appliance normally contains at full charge, and

(C) Step 3. Multiply the result of Step 2. by 100 to obtain a percentage. This method is summarized in the following formula:

$$\text{Leak rate} = \frac{\begin{array}{l} \text{pounds of refrigerant added over past 365 days} \\ \text{(or since leaks were last repaired,} \\ \text{if that period is less than one year)} \end{array}}{\text{pounds of refrigerant in full charge}} \times 100\%$$

(% per year)

Normal operating characteristics or conditions means, for the purposes of paragraph (i) of this section, temperatures, pressures, fluid flows, speeds and other characteristics that would normally be expected for a given process load and ambient condition during operation. Normal operating characteristics and conditions are marked by the absence of atypical conditions affecting the operation of the refrigeration appliance.

Normally containing a quantity of refrigerant means, for the purposes of paragraph (i) of this section, containing the quantity of refrigerant within the appliance or appliance component when the appliance is operating with a full charge of refrigerant.

Refrigerant means, for the purposes of paragraph (i) of this section, any substance consisting in part or whole of a class I or class II ozone-depleting substance that is used for heat transfer purposes and provides a cooling effect.

Substitute means, for the purposes of paragraph (i) of this section, any chemical or product, whether existing or new, that is used by any person as an EPA approved replacement for a class I or II ozone-depleting substance in a given refrigeration or air-conditioning end-use.

Suitable replacement refrigerant means, for the purposes of paragraph (i) of this section, a refrigerant that is acceptable under section 612(c) of the Clean Air Act Amendments of 1990 and all regulations promulgated under that section, compatible with other materials with which it may come into contact, and able to achieve the temperatures required for the affected industrial process in a technically feasible manner.

System mothballing means, for the purposes of paragraph (i) of this section, the intentional shutting down of a refrigeration appliance undertaken for an extended period of time by the owners or operators of that facility, where the refrigerant has been evacuated from the appliance or the affected isolated section of the appliance, at least to atmospheric pressure.

[58 FR 28712, May 14, 1993, as amended at 59 FR 42956, 42962, Aug. 19, 1994; 59 FR 55926, Nov. 9, 1994; 60 FR 40440, Aug. 8, 1995; 68 FR 43807, July 24, 2003; 69 FR 11979, Mar. 12, 2004; 70 FR 1991, Jan. 11, 2005; 79 FR 29690, May 23, 2014; 8a FR 82354, Nov. 18, 2016]

§ 82.157 Appliance maintenance and leak repair.

(a) *Applicability.* This section applies as of January 1, 2019. As of April 10,

2020, this section applies only to appliances with a full charge of 50 or more pounds of any class I or class II refrigerant or blend containing a class I or class II refrigerant. Notwithstanding the use of the term refrigerant in this section, the requirements of this section do not apply to appliances containing solely substitute refrigerants. Unless otherwise specified, the requirements of this section apply to the owner or operator of the appliance.

(b) *Leak Rate Calculation.* Persons adding or removing refrigerant from an appliance must, upon conclusion of that service, provide the owner or operator with documentation that meets the applicable requirements of paragraph (1)(2) of this section. The owner or operator must calculate the leak rate every time refrigerant is added to an appliance unless the addition is made immediately following a retrofit, installation of a new appliance, or qualifies as a seasonal variance.

(c) *Requirement to Address Leaks through Appliance Repair, or Retrofitting or Retiring an Appliance.* (1) Owners or operators must repair appliances with a leak rate over the applicable leak rate in this paragraph in accordance with paragraphs (d) through (f) of this section unless the owner or operator elects to retrofit or retire the appliance in compliance with paragraphs (h) and (i) of this section. If the owner or operator elects to repair leaks, but fails to bring the leak rate below the applicable leak rate, the owner or operator must create and implement a retrofit or retirement plan in accordance with paragraphs (h) and (i) of this section.

(2) *Leak Rates:*

- (i) 20 percent leak rate for commercial refrigeration equipment;
- (ii) 30 percent leak rate for industrial process refrigeration equipment; and
- (iii) 10 percent leak rate for comfort cooling appliances or other appliances with a full charge of 50 or more pounds of refrigerant not covered by (c)(2)(i) or (ii) of this section.

(d) *Appliance Repair.* Owners or operators must identify and repair leaks in accordance with this paragraph within 30 days (or 120 days if an industrial process shutdown is required) of when refrigerant is added to an appliance ex-

ceeding the applicable leak rate in paragraph (c) of this section.

(1) A certified technician must conduct a leak inspection, as described in paragraph (g) of this section, to identify the location of leaks.

(2) Leaks must be repaired such that the leak rate is brought below the applicable leak rate. This must be confirmed by the leak rate calculation performed upon the next refrigerant addition. The leaks will be presumed to be repaired if there is no further refrigerant addition for 12 months after the repair or if the leak inspections required under paragraph (g) do not find any leaks in the appliance. Repair of leaks must be documented by both an initial and a follow-up verification test or tests.

(3) The time frames in paragraphs (d) through (f) of this section are temporarily suspended when an appliance is mothballed. The time will resume on the day additional refrigerant is added to the appliance (or component of an appliance if the leaking component was isolated).

(e) *Verification tests.* The owner or operator must conduct both initial and follow-up verification tests on each leak that was repaired under paragraph (d) of this section.

(1) *Initial verification test.* Unless granted additional time, an initial verification test must be performed within 30 days (or 120 days if an industrial process shutdown is required) of an appliance exceeding the applicable leak rate in paragraph (c) of this section. An initial verification test must demonstrate that leaks where a repair attempt was made are repaired.

(i) For repairs that can be completed without the need to open or evacuate the appliance, the test must be performed after the conclusion of the repair work and before any additional refrigerant is added to the appliance.

(ii) For repairs that require the evacuation of the appliance or portion of the appliance, the test must be performed before adding any refrigerant to the appliance.

(iii) If the initial verification test indicates that the repairs have not been successful, the owner or operator may conduct as many additional repairs and

initial verification tests as needed within the applicable time period.

(2) *Follow-up verification test.* A follow-up verification test must be performed within 10 days of the successful initial verification test or 10 days of the appliance reaching normal operating characteristics and conditions (if the appliance or isolated component was evacuated for the repair(s)). Where it is unsafe to be present or otherwise impossible to conduct a follow-up verification test when the system is operating at normal operating characteristics and conditions, the verification test must, where practicable, be conducted prior to the system returning to normal operating characteristics and conditions.

(i) A follow-up verification test must demonstrate that leaks where a repair attempt was made are repaired. If the follow-up verification test indicates that the repairs have not been successful, the owner or operator may conduct as many additional repairs and verification tests as needed to bring the appliance below the leak rate within the applicable time period and to verify the repairs.

(f) *Extensions to the appliance repair deadlines.* Owners or operators are permitted more than 30 days (or 120 days if an industrial process shutdown is required) to comply with paragraphs (d) and (e) of this section if they meet the requirements of (f)(1) through (4) of this section or the appliance is mothballed. The request will be considered approved unless EPA notifies the owners or operators otherwise.

(1) One or more of the following conditions must apply:

(i) The appliance is located in an area subject to radiological contamination or shutting down the appliance will directly lead to radiological contamination. Additional time is permitted to the extent needed to conduct and finish repairs in a safe working environment.

(ii) Requirements of other applicable Federal, state, or local regulations make a repair within 30 days (or 120 days if an industrial process shutdown is required) impossible. Additional time is permitted to the extent needed to comply with the pertinent regulations.

(iii) Components that must be replaced as part of the repair are not available within 30 days (or 120 days if an industrial process shutdown is required). Additional time is permitted up to 30 days after receiving delivery of the necessary components, not to exceed 180 days (or 270 days if an industrial process shutdown is required) from the date the appliance exceeded the applicable leak rate.

(2) Repairs to leaks that the technician has identified as significantly contributing to the exceedance of the leak rate and that do not require additional time must be completed and verified within the initial 30 day repair period (or 120 day repair period if an industrial process shutdown is required);

(3) The owner or operator must document all repair efforts and the reason for the inability to make the repair within the initial 30 day repair period (or 120 day repair period if an industrial process shutdown is required); and

(4) The owner or operator must request an extension from EPA at the address specified in paragraph (m) of this section within 30 days (or 120 days if an industrial process shutdown is required) of the appliance exceeding the applicable leak rate in paragraph (c) of this section. Extension requests must include: Identification and address of the facility; the name of the owner or operator of the appliance; the leak rate; the method used to determine the leak rate and full charge; the date the appliance exceeded the applicable leak rate; the location of leak(s) to the extent determined to date; any repair work that has been performed thus far, including the date that work was completed; the reasons why more than 30 days (or 120 days if an industrial process shutdown is required) are needed to complete the repair; and an estimate of when the work will be completed. If the estimated completion date is to be extended, a new estimated date of completion and documentation of the reason for that change must be submitted to EPA within 30 days of identifying that the completion date must be extended. The owner or operator must keep a dated copy of this submission.

(g) *Leak Inspections.* (1) The owner or operator must conduct a leak inspection in accordance with the following

schedule on any appliance exceeding the applicable leak rate in paragraph (c)(2) of this section.

(i) For commercial refrigeration and industrial process refrigeration appliances with a full charge of 500 or more pounds, leak inspections must be conducted once every three months until the owner or operator can demonstrate through the leak rate calculations required under paragraph (b) of this section that the appliance has not leaked in excess of the applicable leak rate for four quarters in a row.

(ii) For commercial refrigeration and industrial process refrigeration appliances with a full charge of 50 or more pounds but less than 500 pounds, leak inspections must be conducted once per calendar year until the owner or operator can demonstrate through the leak rate calculations required under paragraph (b) of this section that the appliance has not leaked in excess of the applicable leak rate for one year.

(iii) For comfort cooling appliances and other appliances not covered by paragraphs (g)(1)(i) and (ii) of this section, leak inspections must be conducted once per calendar year until the owner or operator can demonstrate through the leak rate calculations required under paragraph (b) of this section that the appliance has not leaked in excess of the applicable leak rate for one year.

(2) Leak inspections must be conducted by a certified technician using method(s) determined by the technician to be appropriate for that appliance.

(3) All visible and accessible components of an appliance must be inspected, with the following exceptions:

(i) Where components are insulated, under ice that forms on the outside of equipment, underground, behind walls, or are otherwise inaccessible;

(ii) Where personnel must be elevated more than two meters above a support surface; or

(iii) Where components are unsafe to inspect, as determined by site personnel.

(4) Quarterly or annual leak inspections are not required on appliances, or portions of appliances, continuously monitored by an automatic leak detection system that is audited or cali-

brated annually. An automatic leak detection system may directly detect refrigerant in air, monitor its surrounding in a manner other than detecting refrigerant concentrations in air, or monitor conditions of the appliance.

(i) For systems that directly detect the presence of a refrigerant in air, the system must:

(A) Only be used to monitor components located inside an enclosed building or structure;

(B) Have sensors or intakes placed so that they will continuously monitor the refrigerant concentrations in air in proximity to the compressor, evaporator, condenser, and other areas with a high potential for a refrigerant leak;

(C) Accurately detect a concentration level of 10 parts per million of vapor of the specific refrigerant or refrigerants used in the refrigeration appliance(s); and

(D) Alert the owner or operator when a refrigerant concentration of 100 parts per million of vapor of the specific refrigerant or refrigerants used in the refrigeration appliance(s) is reached.

(ii) For a system that monitors its surrounding in a manner other than detecting refrigerant concentrations in air or monitor conditions of the appliance, the system must automatically alert the owner or operator when measurements indicate a loss of 50 pounds of refrigerant or 10 percent of the full charge, whichever is less.

(iii) When automatic leak detection equipment is only being used to monitor portions of an appliance, the remainder of the appliance continues to be subject to any applicable leak inspection requirements.

(h) *Retrofit or retirement plans.* (1) The owner or operator must create a retrofit or retirement plan within 30 days of:

(i) an appliance leaking above the applicable leak rate in paragraph (c) of this section if the owner or operator intends to retrofit or retire rather than repair the leak;

(ii) an appliance leaking above the applicable leak rate in paragraph (c) of this section if the owner or operator fails to take any action to identify or repair the leak; or

(iii) an appliance continues to leak above the applicable leak rate after having conducted the required repairs and verification tests under paragraphs (d) and (e) of this section.

(2) A retrofit or retirement plan must, at a minimum, contain the following information:

(i) Identification and location of the appliance;

(ii) Type and full charge of the refrigerant used in the appliance;

(iii) Type and full charge of the refrigerant to which the appliance will be converted, if retrofitted;

(iv) Itemized procedure for converting the appliance to a different refrigerant, including changes required for compatibility with the new substitute, if retrofitted;

(v) Plan for the disposition of recovered refrigerant;

(vi) Plan for the disposition of the appliance, if retired; and

(vii) A schedule, not to exceed one-year, for completion of the appliance retrofit or retirement.

(3) The retrofit or retirement plan must be signed by an authorized company official, dated, accessible at the site of the appliance in paper copy or electronic format, and available for EPA inspection upon request.

(4) All identified leaks must be repaired as part of any retrofit under such a plan.

(5)(i) Unless granted additional time, all work performed in accordance with the plan must be finished within one year of the plan's date (not to exceed 13 months from when the plan was required in paragraph (h)(1) of this section).

(ii) The owner or operator may request that EPA relieve it of the obligation to retrofit or retire an appliance if the owner or operator can establish within 180 days of the plan's date that the appliance no longer exceeds the applicable leak rate and if the owner or operator agrees in writing to repair all identified leaks within one year of the plan's date consistent with paragraph (h)(4) and (h)(5)(i) of this section. The owner or operator must submit to EPA the retrofit or retirement plan as well as the following information: The date that the requirement to develop a retrofit or retirement plan was triggered;

the leak rate; the method used to determine the leak rate and full charge; the location of the leak(s) identified in the leak inspection; a description of repair work that has been completed; a description of repair work that has not been completed; a description of why the repair was not conducted within the time frames required under paragraphs (d) and (f) of this section; and a statement signed by an authorized official that all identified leaks will be repaired and an estimate of when those repairs will be completed (not to exceed one year from date of the plan). The request will be considered approved unless EPA notifies the owners or operators within 60 days of receipt of the request that it is not approved.

(i) *Extensions to the one-year retrofit or retirement schedule.* Owners or operators may request more than one year to comply with paragraph (h) of this section if they meet the requirements of this paragraph. The request will be considered approved unless EPA notifies the owners or operators within 60 days of receipt of the request that it is not approved. The request must be submitted to EPA at the address specified in § 82.157(m) within seven months of discovering the appliance exceeded the applicable leak rate. The request must include the identification of the appliance; name of the owner or operator; the leak rate; the method used to determine the leak rate and full charge; the date the appliance exceeded the applicable leak rate; the location of leaks(s) to the extent determined to date; any repair work that has been finished thus far, including the date that work was finished; a plan to finish the retrofit or retirement of the appliance; the reasons why more than one year is necessary to retrofit or retire the appliance; the date of notification to EPA; and an estimate of when retrofit or retirement work will be finished. A dated copy of the request must be available on-site in either electronic or paper copy. If the estimated completion date is to be revised, a new estimated date of completion and documentation of the reason for that change must be submitted to EPA at the address specified in § 82.157(m) within 30 days. Additionally, the time frames in paragraphs (h) and (i) of this

section are temporarily suspended when an appliance is mothballed. The time will resume running on the day additional refrigerant is added to the appliance (or component of an appliance if the leaking component was isolated).

(1) *Extensions available to any appliance.* Owners or operators of commercial refrigeration, industrial process refrigeration, comfort-cooling, or other equipment are automatically allowed 18 months to retire an appliance if the replacement appliance uses a substitute refrigerant exempted under § 82.154(a).

(2) *Extensions available to industrial process refrigeration.* Owners or operators of industrial process refrigeration equipment may request additional time beyond the one-year period in paragraph (h) of this section to finish the retrofit or retirement under the following circumstances.

(i) Requirements of other applicable Federal, state, or local regulations make a retrofit or retirement within one year impossible. Additional time is permitted to the extent needed to comply with the pertinent regulations;

(ii) The new or the retrofitted equipment is custom-built as defined in this subpart and the supplier of the appliance or one of its components has quoted a delivery time of more than 30 weeks from when the order is placed. The appliance or appliance components must be installed within 120 days after receiving delivery of the necessary parts; or

(iii) After receiving an extension under paragraph (i)(2)(ii) of this section, owners or operators may request additional time if necessary to finish the retrofit or retirement of equipment. The request must be submitted to EPA before the end of the ninth month of the initial extension and must include the same information submitted for that extension, with any necessary revisions. A dated copy of the request must be available on-site in either electronic or paper copy. The request will be considered approved unless EPA notifies the owners or operators within 60 days of receipt of the request that it is not approved.

(3) *Extensions available to Federally owned equipment.* Owners or operators

of federally owned commercial or comfort-cooling equipment may request an additional year beyond the one-year period in paragraph (h) of this section to finish the retrofit or retirement under the following circumstances:

(i) A delivery time of more than 30 weeks from the beginning of the official procurement process is quoted due to complications presented by the Federal agency appropriations and/or procurement process;

(ii) The appliance is located in an area subject to radiological contamination and creating a safe working environment will require more than 30 weeks; or

(iii) After receiving a one-year extension under paragraphs (i)(3)(i) or (ii) of this section, additional time may be requested if necessary to finish the retrofit or retirement of equipment. The request must be submitted to EPA before the end of the ninth month of the one-year extension and must include the same information submitted for that one-year extension, with any necessary revisions. A dated copy of the request must be available on-site in either electronic or paper copy. The request will be considered approved unless EPA notifies the owners or operators within 60 days of receipt of the request that it is not approved.

(j) *Chronically leaking appliances.* Owners or operators of appliances containing 50 pounds or more of refrigerant that leak 125 percent or more of the full charge in a calendar year must submit a report to EPA at the address in paragraph (m) of this section. This report must be submitted by March 1 of the subsequent year and describe efforts to identify leaks and repair the appliance.

(k) *Purged refrigerant.* In calculating annual leak rates, purged refrigerant that is destroyed at a verifiable destruction efficiency of 98 percent or greater will not be counted toward the leak rate.

(l) *Recordkeeping.* All records identified in this paragraph must be kept for at least three years in electronic or paper format, unless otherwise specified.

(1) Owners or operators must determine the full charge of all appliances with 50 or more pounds of refrigerant

and maintain the following information for each appliance until three years after the appliance is retired:

(i) The identification of the owner or operator of the appliance;

(ii) The address where the appliance is located;

(iii) The full charge of the appliance and the method for how the full charge was determined;

(iv) If using method 4 (using an established range) for determining full charge, records must include the range for the full charge of the appliance, its midpoint, and how the range was determined;

(v) Any revisions of the full charge, how they were determined, and the dates such revisions occurred.

(2) Owners or operators must maintain a record including the following information for each time an appliance with a full charge of 50 or more pounds is maintained, serviced, repaired, or disposed of, when applicable. If the maintenance, service, repair, or disposal is done by someone other than the owner or operator, that person must provide a record containing the following information, with the exception of (1)(2)(vii) and (viii) of this section, to the owner or operator:

(i) The identity and location of the appliance;

(ii) The date of the maintenance, service, repair, or disposal performed;

(iii) The part(s) of the appliance being maintained, serviced, repaired, or disposed;

(iv) The type of maintenance, service, repair, or disposal performed for each part;

(v) The name of the person performing the maintenance, service, repair, or disposal;

(vi) The amount and type of refrigerant added to, or in the case of disposal removed from, the appliance;

(vii) The full charge of the appliance; and

(viii) The leak rate and the method used to determine the leak rate (not applicable when disposing of the appliance, following a retrofit, installing a new appliance, or if the refrigerant addition qualifies as a seasonal variance).

(3) Owners or operators must keep records of leak inspections that include the date of inspection, the method(s)

used to conduct the leak inspection, a list of the location of each leak that was identified, and a certification that all visible and accessible parts of the appliance were inspected. Technicians conducting leak inspections must, upon conclusion of that service, provide the owner or operator of the appliance with documentation that meets these requirements.

(4) If using an automatic leak detection system, the owner or operator must maintain records regarding the installation and the annual audit and calibration of the system, a record of each date the monitoring system identified a leak, and the location of the leak.

(5) Owners or operators must maintain records of the dates and results of all initial and follow-up verification tests. Records must include the location of the appliance, the date(s) of the verification tests, the location(s) of all repaired leaks that were tested, the type(s) of verification test(s) used, and the results of those tests. Technicians conducting initial or follow-up verification tests must, upon conclusion of that service, provide the owner or operator of the appliance with documentation that meets these requirements.

(6) Owners or operators must maintain retrofit or retirement plans developed in accordance with paragraph (h) of this section.

(7) Owners or operators must maintain retrofit and/or extension requests submitted to EPA in accordance with paragraph (i) of this section.

(8) Owners or operators that suspend the deadlines in this section by mothballing an appliance must keep records documenting when the appliance was mothballed and when additional refrigerant was added to the appliance (or isolated component).

(9) Owners or operators who exclude purged refrigerants that are destroyed from annual leak rate calculations must maintain records to support the amount of refrigerant claimed as sent for destruction. Records must be based on a monitoring strategy that provides reliable data to demonstrate that the amount of refrigerant claimed to have been destroyed is not greater than the amount of refrigerant actually purged

and destroyed and that the 98 percent or greater destruction efficiency is met. Records must include flow rate, quantity or concentration of the refrigerant in the vent stream, and periods of purge flow. Records must include:

(i) The identification of the facility and a contact person, including the address and telephone number;

(ii) A description of the appliance, focusing on aspects relevant to the purging of refrigerant and subsequent destruction;

(iii) A description of the methods used to determine the quantity of refrigerant sent for destruction and type of records that are being kept by the owners or operators where the appliance is located;

(iv) The frequency of monitoring and data-recording; and

(v) A description of the control device, and its destruction efficiency.

(10) Owners or operators that exclude additions of refrigerant due to seasonal variance from their leak rate calculation must maintain records stating that they are using the seasonal variance flexibility and documenting the amount added and removed under § 82.157(1)(2).

(11) Owners or operators that submit reports to EPA in accordance with paragraph (m) of this section must maintain copies of the submitted reports and any responses from EPA.

(m) *Reporting.* All notifications must be submitted electronically to 608reports@epa.gov unless the notification contains confidential business information. If the notification contains confidential business information, the information should be submitted to: Section 608 Program Manager; Stratospheric Protection Division; Mail Code: 6205T; U.S. Environmental Protection Agency; 1200 Pennsylvania Avenue NW., Washington, DC 20460.

(1) Owners or operators must notify EPA at this address in accordance with paragraph (f) of this section when seeking an extension of time to complete repairs.

(2) Owners or operators must notify EPA at this address in accordance with paragraph (h)(5)(ii) of this section when seeking relief from the obligation to retrofit or retire an appliance.

(3) Owners or operators must notify EPA at this address in accordance with paragraph (i) of this section when seeking an extension of time to complete the retrofit or retirement of an appliance.

(4) Owners or operators must notify EPA at this address in accordance with paragraph (j) of this section for any appliance that leaks 125 percent or more of the full charge in a calendar year.

(5) When excluding purged refrigerants that are destroyed from annual leak rate calculations, owners or operators must notify EPA at this address within 60 days after the first time the exclusion is used by the facility where the appliance is located. The report must include the information included in paragraph (1)(9) of this section.

[81 FR 82356, Nov. 18, 2016, as amended at 85 FR 14171, Apr. 10, 2020]

§ 82.158 Standards for recovery and/or recycling equipment.

Starting January 1, 2017, this section applies to recovery and/or recycling equipment for use during the maintenance, service, repair, or disposal of appliances containing any class I or class II refrigerant or any non-exempt substitute refrigerant.

(a) No person may manufacture or import recovery and/or recycling equipment for use during the maintenance, service, repair, or disposal of appliances unless the equipment is certified in accordance with this section.

(b) No person may alter the design of certified refrigerant recovery and/or recycling equipment in a way that would affect the equipment's ability to meet the certification standards in this section without resubmitting the altered design for certification testing. Until it is tested and shown to meet the certification standards in this section, equipment so altered will be considered uncertified.

(c) Recovery and/or recycling equipment manufactured or imported before November 15, 1993, intended for use during the maintenance, service, repair, or disposal of appliances (except small appliances, MVACs, and MVAC-like appliances) will be considered certified if it is capable of achieving the level of evacuation specified in Table 2 of this

section when tested using a properly calibrated pressure gauge.

(d) Manufacturers and importers of recovery and/or recycling equipment must have such equipment certified by an approved equipment testing organization as follows:

(1) Recovery and/or recycling equipment manufactured or imported on or after November 15, 1993, and before September 22, 2003, intended for use during the maintenance, service, repair, or disposal of appliances (except small appliances, MVACs, and MVAC-like appliances) must be certified by an approved equipment testing organization as being capable of achieving the level of evacuation specified in Table 2 of this section under the conditions of appendix B1 of this subpart (based upon the ARI Standard 740–1993, *Performance of Refrigerant Recovery, Recycling and/or Reclaim Equipment*).

(2) Recovery and/or recycling equipment manufactured or imported on or after September 22, 2003, and before January 1, 2017, intended for use during

the maintenance, service, repair, or disposal of appliances (except small appliances, MVACs, and MVAC-like appliances) must be certified by an approved equipment testing organization as being capable of achieving the level of evacuation specified in Table 2 of this section under the conditions of appendix B2 of this subpart (based upon the ARI Standard 740–1995, *Performance of Refrigerant Recovery, Recycling and/or Reclaim Equipment*).

(3) Recovery and/or recycling equipment manufactured or imported on or after January 1, 2017, intended for use during the maintenance, service, repair, or disposal of appliances (except small appliances, MVACs, and MVAC-like appliances) must be certified by an approved equipment testing organization as being capable of achieving the level of evacuation specified in Table 2 of this section under the conditions of appendix B3 (for non-flammable refrigerants) based upon AHRI Standard 740–2016 or appendix B4 (for flammable refrigerants) of this subpart.

TABLE 2—LEVELS OF EVACUATION WHICH MUST BE ACHIEVED BY RECOVERY AND/OR RECYCLING EQUIPMENT

[Except for small appliances, MVACs, and MVAC-like appliances.]

Type of appliance with which recovery and/or recycling machine is intended to be used	Inches of Hg vacuum (relative to standard atmospheric pressure of 29.9 inches Hg)	
	Manufactured or imported before November 15, 1993	Manufactured or imported on or after November 15, 1993
HCFC–22 appliances, or isolated component of such appliances, with a full charge of less than 200 pounds of refrigerant.	0	0.
HCFC–22 appliances, or isolated component of such appliances, with a full charge of 200 pounds or more of refrigerant.	4	10.
Very high-pressure appliances	0	0.
Other high-pressure appliances, or isolated component of such appliances, with a full charge of less than 200 pounds of refrigerant.	4	10.
Other high-pressure appliances, or isolated component of such appliances, with a full charge of 200 pounds or more of refrigerant.	4	15.
Medium-pressure appliances, or isolated component of such appliances, with a full charge of less than 200 pounds of refrigerant.	4	10.
Medium-pressure appliances, or isolated component of such appliances, with a full charge of 200 pounds or more of refrigerant.	4	15.
Low-pressure appliances	25 mm Hg absolute	25 mm Hg absolute.

(4) Recovery and/or recycling equipment whose recovery efficiency cannot be tested according to the procedures in appendix B1, B2, B3, or B4 of this subpart as applicable may be certified

if an approved third-party testing organization adopts and performs a test that demonstrates, to the satisfaction of the Administrator, that the recovery

efficiency of that equipment is equal to or better than that of equipment that:

(i) Is intended for use with the same type of appliance; and

(ii) Achieves the level of evacuation in Table 2. The manufacturer's instructions must specify how to achieve the required recovery efficiency, and the equipment must be tested when used according to these instructions.

(5) The equipment must meet the minimum requirements for certification under appendix B1, B2, B3, or B4 of this subpart as applicable.

(6) If the equipment is equipped with a noncondensables purge device, the equipment must not release more than 3 percent of the quantity of refrigerant being recycled through noncondensables purging under the conditions of appendix B1, B2, B3, or B4 of this subpart as applicable.

(7) The equipment must be equipped with low-loss fittings on all hoses.

(8) The equipment must have its liquid recovery rate and its vapor recovery rate measured under the conditions of appendix B1, B2, B3, or B4 as applicable, unless the equipment has no inherent liquid or vapor recovery rate.

(e) *Small Appliances.* Equipment used during the maintenance, service, repair, or disposal of small appliances must be certified by an approved equipment testing organization to be capable of recovering 90 percent of the refrigerant in the test stand when the compressor of the test stand is operational and 80 percent of the refrigerant when the compressor of the test stand is not operational, when used in accordance with the manufacturer's instructions under the conditions of appendix C, Method for Testing Recovery Devices for Use with Small Appliances.

(1) Equipment manufactured or imported before November 15, 1993, will be considered certified if it is capable of either recovering 80 percent of the refrigerant in the system, whether or not the compressor of the test stand is operational, or achieving a four-inch vacuum when tested using a properly calibrated pressure gauge.

(2) Equipment manufactured or imported on or after November 15, 1993, may also be certified if it is capable of achieving a four-inch vacuum under the conditions of appendix B1 of this

subpart, based upon ARI Standard 740–1993.

(3) Equipment manufactured or imported on or after September 22, 2003, and before January 1, 2017, may also be certified if it is capable of achieving a four-inch vacuum under the conditions of appendix B2 of this subpart, based upon ARI Standard 740–1995.

(4) Equipment manufactured or imported on or after January 1, 2017, may also be certified if it is capable of achieving a four-inch vacuum under the conditions of appendix B3 of this subpart (for non-flammable refrigerants), based upon AHRI Standard 740–2016 or appendix B4 of this subpart (for flammable refrigerants), based upon both AHRI Standard 740–2016 and UL 1963, Supplement SB, *Requirements for Refrigerant Recovery/Recycling Equipment Intended for Use with a Flammable Refrigerant*, Fourth Edition, June 1, 2011.

(5) Equipment used to evacuate any class I or class II refrigerant or any non-exempt substitute refrigerant from small appliances before they are disposed of may also be certified if it is capable of achieving a four-inch vacuum when tested using a properly calibrated pressure gauge.

(f) *MVAC-like appliances.* (1) Manufacturers and importers of recovery and/or recycling equipment intended for use during the maintenance, service, repair, or disposal of MVAC-like appliances must certify such equipment in accordance with subpart B of this part.

(2) Equipment manufactured or imported before November 15, 1993, intended for use during the maintenance, service, or repair of MVAC-like appliances must be capable of reducing the system pressure to 102 mm of mercury vacuum under the conditions of appendix A of subpart B of this part.

(g) *MVACs.* Manufacturers and importers of recovery and/or recycling equipment intended for use during the maintenance, service, repair, or disposal of MVACs must certify such equipment in accordance with subpart B of this part.

(h) *Labeling.* (1) Manufacturers and importers of equipment certified under paragraphs (d) and (e) of this section must place a label on each piece of equipment stating the following:

Environmental Protection Agency

§ 82.160

THIS EQUIPMENT HAS BEEN CERTIFIED BY [APPROVED EQUIPMENT TESTING ORGANIZATION] TO MEET EPA'S MINIMUM REQUIREMENTS FOR RECYCLING OR RECOVERY EQUIPMENT INTENDED FOR USE WITH [APPROPRIATE CATEGORY OF APPLIANCE].

(2) The label must also show the date of manufacture and the serial number (if applicable) of the equipment. The label must be affixed in a readily visible or accessible location, be made of a material expected to last the lifetime of the equipment, present required information in a way that it is likely to remain legible for the lifetime of the equipment, and be affixed in such a way that it cannot be removed from the equipment without damage to the label.

(i) *Retesting.* At least once every three years, manufacturers or importers of certified recovery and/or recycling equipment intended for use during the maintenance, service, or repair of appliances (except MVACs or MVAC-like appliances) or during the disposal of appliances (except small appliances, MVACs, and MVAC-like appliances)

must have approved equipment testing organizations conduct either:

(1) Retests of certified recovery and/or recycling equipment in accordance with paragraphs (d) and (e) of this section; or

(2) Inspections of recovery and/or recycling equipment at manufacturing facilities to ensure that each equipment model line that has been certified under this section continues to meet the certification criteria.

(j) *Revocation.* An equipment model line that has been certified under this section may have its certification revoked if it is subsequently determined to fail to meet the certification criteria. In such cases, the Administrator must give notice to the manufacturer or importer setting forth the basis for the determination.

(k) Equipment that is advertised or marketed as "recycling equipment" must be capable of recycling the standard contaminated refrigerant sample of appendix B2, B3, or B4 of this subpart (as applicable) to the levels in the following table when tested under the conditions of appendix B2, B3 or B4 of this subpart:

MAXIMUM LEVELS OF CONTAMINANTS PERMISSIBLE IN REFRIGERANT PROCESSED THROUGH EQUIPMENT ADVERTISED AS "RECYCLING" EQUIPMENT

Contaminants	Low-pressure (R-11, R-123, R-113) systems	R-12 systems	All other systems
Acid Content (by wt.)	1.0 PPM	1.0 PPM	1.0 PPM.
Moisture (by wt.)	20 PPM	10 PPM	20 PPM.
Noncondensable Gas (by vol.)	N/A	2.0%	2.0%.
High Boiling Residues (by vol.)	1.0%	0.02%	0.02%.
Chlorides by Silver Nitrate Test	No turbidity	No turbidity	No turbidity.
Particulates	Visually clean	Visually clean	Visually clean.

[81 FR 82360, Nov. 18, 2016]

§ 82.160 Approved equipment testing organizations.

(a) Any equipment testing organization may apply for approval by the Administrator to certify equipment under the standards in § 82.158 and appendices B2, B3, B4, or C of this subpart. Applications must be sent to 608reports@epa.gov, or if containing confidential business information, mailed to: Section 608 Program Manager, Stratospheric Protection Division, Mail Code: 6205T, U.S. Environ-

mental Protection Agency, 1200 Pennsylvania Avenue NW., Washington, DC 20460.

(b) Applications for approval must include:

(1) A list of equipment present at the organization that will be used for equipment testing.

(2) Verification of the organization's expertise in equipment testing and the technical experience of the organization's personnel.

(3) Verification of the organization's knowledge of the standards and record-keeping and reporting requirements of this subpart.

(4) A description of the organization's program for verifying the performance of certified recovery and/or recycling equipment manufactured over the long term, specifying whether retests of equipment or inspections of equipment at manufacturing facilities will be used.

(5) Verification that the organization has no conflict of interest and receives no direct or indirect financial benefit from the outcome of certification testing.

(6) Agreement to allow the Administrator access to records and personnel to verify the information contained in the application.

(c) Organizations may not certify equipment before receiving approval from EPA. If approval is denied under this section, the Administrator must give written notice to the organization setting forth the basis for the determination.

(d) If an approved testing organization conducts certification tests in a way not consistent with the representations made in its application or with the provisions of this subpart, the Administrator may revoke approval in accordance with § 82.169. In such cases, the Administrator must give notice to the organization setting forth the basis for the determination.

(e) *Recordkeeping and reporting.* (1) Approved equipment testing organizations must maintain records of equipment testing and performance and a list of equipment that meets EPA requirements. This list must include the name of the manufacturer and the name and/or serial number of the model line. Approved equipment testing organizations must publish online a list of all certified equipment that includes the information specified above and update the list annually.

(2) Approved equipment testing organizations must notify EPA at 608reports@epa.gov if retests of equipment or inspections of manufacturing facilities conducted under to § 82.158(i) show that a previously certified model line fails to meet EPA requirements. Such notification must be received

within thirty days of the retest or inspection.

(3) All records must be maintained for three years after the equipment is no longer offered for sale. Online lists must contain certified equipment until three years after that equipment is no longer offered for sale.

[81 FR 82362, Nov. 18, 2016]

§ 82.161 Technician certification.

Until January 1, 2018, this section applies only to technicians and organizations certifying technicians that maintain, service, or repair appliances containing class I or class II refrigerants. Starting on January 1, 2018, this section applies to technicians and organizations certifying technicians that maintain, service, or repair appliances containing any class I or class II refrigerant or any non-exempt substitute refrigerant.

(a) *Certification Requirements.* (1) Any person who could be reasonably expected to violate the integrity of the refrigerant circuit during the maintenance, service, repair, or disposal of appliances (as follows in this paragraph) containing a class I or class II refrigerant or a non-exempt substitute refrigerant must pass a certification exam offered by an approved technician certification program.

(i) Persons who maintain, service, or repair small appliances must be certified as Type I technicians.

(ii) Persons who maintain, service, repair, or dispose of medium-, high-, or very high-pressure appliances (except small appliances, MVACs, and MVAC-like appliances) must be certified as Type II technicians.

(iii) Persons who maintain, service, repair, or dispose of low-pressure appliances must be certified as Type III technicians.

(iv) Persons who maintain, service, repair, or dispose of all appliances described in paragraph (a)(1)(i) through (iii) of this section must be certified as Universal technicians.

(v) Technicians who maintain, service, or repair MVAC-like appliances must either be certified as Type II technicians or be certified in accordance with 40 CFR part 82, subpart B.

(vi) Persons who maintain, service, or repair MVAC appliances for consideration must be certified in accordance with 40 CFR part 82, subpart B.

(vii) Persons who dispose of small appliances, MVACs, and MVAC-like appliances are not required to be certified.

(2) Apprentices are exempt from the requirement in paragraph (a)(1) of this section provided the apprentice is closely and continually supervised by a certified technician while performing any maintenance, service, repair, or disposal that could reasonably be expected to release refrigerant from an appliance into the environment, except those substitute refrigerants exempted under paragraph (a)(1) of this section. The supervising certified technician and the apprentice have the responsibility to ensure that the apprentice complies with this subpart.

(3) The Administrator may require technicians to demonstrate at their place of business their ability to perform proper procedures for recovering and/or recycling refrigerant, except those substitute refrigerants exempted under paragraph (a)(1) of this section. Failure to demonstrate or failure to properly use the equipment may result in revocation or suspension of the certificate. Failure to abide by any of the provisions of this subpart may also result in revocation or suspension of the certificate. If a technician's certificate is revoked, the technician would need to recertify before maintaining, servicing, repairing, or disposing of any appliances.

(4) (i) Technicians certified under this section must keep a copy of their certificate at their place of business.

(ii) Technicians must maintain a copy of their certificate until three years after no longer operating as a technician.

(5) *Recertification.* The Administrator reserves the right to specify a requirement for technician recertification at some future date, if necessary, by placing a notice in the FEDERAL REGISTER.

(b) *Requirements for Technician Certification Programs.* (1) No technician training or testing program may issue certificates under this section unless the program complies with all the standards of this section and appendix

D, and has been granted approval by the Administrator.

(2) *Program Approval.* Persons may seek approval of any technician certification program (program), in accordance with this paragraph, by submitting to the Administrator at the address in § 82.160(a) verification that the program meets all the standards listed in appendix D of this subpart. The Administrator reserves the right to consider other relevant factors to ensure the effectiveness of certification programs. If approval is denied under this section, the Administrator must give written notice to the program setting forth the basis for the determination.

(3) *Alternative Examinations.* Programs are encouraged to make provisions for non-English speaking technicians by providing tests in other languages or allowing the use of a translator when taking the test. A test may be administered orally to any person who makes this request, in writing, to the program at least 30 days before the scheduled date for the examination. The written request must explain why the request is being made.

(4) *Proof of Certification.* Programs certifying technicians must provide technicians with identification cards in accordance with section (f) of appendix D of this subpart.

(5) Programs certifying technicians must maintain records in accordance with section (g) of appendix D of this subpart.

(6) Starting January 1, 2018, programs certifying technicians, excluding Federally-run programs, must publish online a list of all technicians they have certified on or after January 1, 2017. Certifying organizations must update these lists at least annually.

(i) The list must include the first name, middle initial, and last name of the certified technician, the technician's city of residence when taking the test, the type(s) of certification received, and the date each certification was received.

(ii) Programs certifying technicians must provide notice to technicians that such information will be published online in compliance with any other Federal, state or local regulations, and allow technicians to opt out of being included in such lists.

(7) If an approved program violates any of the above requirements, the Administrator may revoke approval in accordance with §82.169. In such cases, the Administrator must give notice to the organization setting forth the basis for the determination.

(c) *Test Subject Material.* A bank of test questions developed by the Administrator consists of groups, including a core group and technical groups. The Administrator will release this bank of questions only to approved technician certification programs. Each test for each type of certification must include at least 25 questions drawn from the core group and at least 25 questions drawn from each relevant technical group. These questions must address the subject areas in appendix D of this subpart.

[81 FR 82363, Nov. 18, 2016]

§ 82.162 [Reserved]

§ 82.164 Reclaimer certification.

(a) All persons reclaiming used class I or II refrigerant or non-exempt substitute refrigerant for sale to a new owner must meet the following requirements:

(1) Reclaim such refrigerant to all the specifications in appendix A of this subpart (based on AHRI Standard 700–2016, *Specifications for Refrigerants*) that are applicable to that refrigerant;

(2) Verify that each batch of such refrigerant reclaimed meets these specifications using the analytical methodology prescribed in appendix A of this subpart, which includes the primary methodologies included in appendix A of AHRI Standard 700–2016;

(3) Release no more than 1.5 percent of the refrigerant during the reclamation process;

(4) Dispose of wastes from the reclamation process in accordance with all applicable laws and regulations; and

(5) Maintain records and submit reports in accordance with paragraph (d) of this section.

(b) The owner or a responsible officer reclaiming used refrigerant for sale to a new owner, except for persons who properly certified under this section before May 11, 2004, must certify to the Administrator at the address in §82.160(a) that they will meet the re-

quirements in paragraph (a) of this section. The certification must include the name and address of the reclaimer and a list of equipment used to reclaim the refrigerant to the required standard, and to analyze the refrigerant to ensure it meets these specifications.

(c) Certificates are not transferable. In the event of a change in ownership of an entity which reclaims refrigerant, the new owner of the entity must certify with the Administrator within 30 days of the change that they will meet the reclaimer certification requirements. In the event of a change in business management, location, or contact information, the owner of the entity must notify EPA within 30 days of the change at the address in §82.160(a).

(d) *Recordkeeping and reporting.* (1) Reclaimers must maintain records, by batch, of the results of the analysis conducted to verify that reclaimed refrigerant meets the necessary specifications in paragraph (a)(2) of this section.

(2) Reclaimers must maintain records of the names and addresses of persons sending them material for reclamation and the quantity of the material (the combined mass of refrigerant and contaminants) by refrigerant type sent to them for reclamation. Such records must be maintained on a transactional basis for three years.

(3) Reclaimers must report to the Administrator annually by February 1 of the next calendar year the total annual quantity of material (the combined mass of refrigerant and contaminants) by refrigerant type sent to them for reclamation, the total annual mass of each refrigerant reclaimed, and the total annual mass of waste products.

(e) Failure to abide by any of the provisions of this subpart may result in revocation or suspension of the certification of the reclaimer in accordance with §82.169. In such cases, the Administrator must give notice to the organization setting forth the basis for the determination.

[81 FR 82364, Nov. 18, 2016]

§ 82.166 Reporting and recordkeeping requirements for leak repair.

This section contains leak repair reporting and recordkeeping requirements that apply to owners and operators of appliances containing 50 or more pounds of class I or class II refrigerants until January 1, 2019. Starting January 1, 2019, the recordkeeping and reporting requirements in the leak repair provisions in § 82.157(l) and (m) apply to owners and operators of appliances containing 50 or more pounds of class I or class II refrigerants or non-exempt substitutes.

(a)-(i) [Reserved]

(j) Persons servicing appliances normally containing 50 or more pounds of refrigerant must provide the owner/operator of such appliances with an invoice or other documentation, which indicates the amount of refrigerant added to the appliance.

(k) Owners/operators of appliances normally containing 50 or more pounds of refrigerant must keep servicing records documenting the date and type of service, as well as the quantity of refrigerant added. The owner/operator must keep records of refrigerant purchased and added to such appliances in cases where owners add their own refrigerant. Such records should indicate the date(s) when refrigerant is added.

(l) [Reserved]

(m) All records required to be maintained pursuant to this section must be kept for a minimum of three years unless otherwise indicated.

(n) The owners or operators of appliances must maintain on-site and report to EPA Headquarters at the address listed in § 82.160 the information specified in paragraphs (n)(1), (n)(2), and (n)(3) of this section, within the timelines specified under § 82.156 (i)(1), (i)(2), (i)(3) and (i)(5) where such reporting or recordkeeping is required. This information must be relevant to the affected appliance.

(1) An initial report to EPA under § 82.156(i)(1)(i), (i)(2), or (i)(5)(i) regarding why more than 30 days are needed to complete repairs must include: Identification of the facility; the leak rate; the method used to determine the leak rate and full charge; the date a leak rate above the applicable leak rate was discovered; the location of leak(s) to

the extent determined to date; any repair work that has been completed thus far and the date that work was completed; the reasons why more than 30 days are needed to complete the work and an estimate of when the work will be completed. If changes from the original estimate of when work will be completed result in extending the completion date from the date submitted to EPA, the reasons for these changes must be documented and submitted to EPA within 30 days of discovering the need for such a change.

(2) If the owners or operators intend to establish that the appliance's leak rate does not exceed the applicable allowable leak rate in accordance with § 82.156(i)(3)(v), the owner or operator must submit a plan to fix other outstanding leaks for which repairs are planned but not yet completed to achieve a rate below the applicable allowable leak rate. A plan to fix other outstanding leaks in accordance with § 82.156(i)(3)(v) must include the following information: The identification of the facility; the leak rate; the method used to determine the leak rate and full charge; the date a leak rate above the applicable allowable leak rate was discovered; the location of leak(s) to the extent determined to date; and any repair work that has been completed thus far, including the date that work was completed. Upon completion of the repair efforts described in the plan, a second report must be submitted that includes the date the owner or operator submitted the initial report concerning the need for additional time beyond the 30 days and notification of the owner or operator's determination that the leak rate no longer exceeds the applicable allowable leak rate. This second report must be submitted within 30 days of determining that the leak rate no longer exceeds the applicable allowable leak rate.

(3) Owners or operators must maintain records of the dates, types, and results of all initial and follow-up verification tests performed under § 82.156(i)(3). Owners or operators must submit this information to EPA within 30 days after conducting each test only where required under § 82.156 (i)(1), (i)(2), (i)(3) and (i)(5). These reports must also include: Identification and

physical address of the facility; the leak rate; the method used to determine the leak rate and full charge; the date a leak rate above the applicable allowable leak rate was discovered; the location of leak(s) to the extent determined to date; and any repair work that has been completed thus far and the date that work was completed. Submitted reports must be dated and include the name of the owner or operator of the appliance, and must be signed by an authorized company official.

(o) The owners or operators of appliances must maintain on-site and report to EPA at the address specified in § 82.160 the following information where such reporting and recordkeeping is required and in the timelines specified in § 82.156 (i)(7) and (i)(8), in accordance with § 82.156 (i)(7) and (i)(8). This information must be relevant to the affected appliance and must include:

- (1) The identification of the industrial process facility;
- (2) The leak rate;
- (3) The method used to determine the leak rate and full charge;
- (4) The date a leak rate above the applicable allowable rate was discovered.
- (5) The location of leaks(s) to the extent determined to date;
- (6) Any repair work that has been completed thus far and the date that work was completed;
- (7) A plan to complete the retrofit or retirement of the system;
- (8) The reasons why more than one year is necessary to retrofit or retire the system;
- (9) The date of notification to EPA; and
- (10) An estimate of when retrofit or retirement work will be completed. If the estimated date of completion changes from the original estimate and results in extending the date of completion, the owner or operator must submit to EPA the new estimated date of completion and documentation of the reason for the change within 30 days of discovering the need for the change, and must retain a dated copy of this submission.

(p)(1) Owners or operators who wish to exclude purged refrigerants that are destroyed from annual leak rate calculations must maintain records on-

site to support the amount of refrigerant claimed as sent for destruction. Records shall be based on a monitoring strategy that provides reliable data to demonstrate that the amount of refrigerant claimed to have been destroyed is not greater than the amount of refrigerant actually purged and destroyed and that the 98 percent or greater destruction efficiency is met. Records shall include flow rate, quantity or concentration of the refrigerant in the vent stream, and periods of purge flow.

(2) Owners or operators who wish to exclude purged refrigerants that are destroyed from annual leak rate calculations must maintain on-site and make available to EPA upon request the following information after the first time the exclusion is utilized by the facility:

- (i) The identification of the facility and a contact person, including the address and telephone number;
- (ii) A general description of the refrigerant appliance, focusing on aspects of the appliance relevant to the purging of refrigerant and subsequent destruction;
- (iii) A description of the methods used to determine the quantity of refrigerant sent for destruction and type of records that are being kept by the owners or operators where the appliance is located;
- (iv) The frequency of monitoring and data-recording; and
- (v) A description of the control device, and its destruction efficiency.

This information must also be included, where applicable, in any reporting requirements required for compliance with the leak repair and retrofit requirements for industrial process refrigeration equipment, as set forth in paragraphs (n) and (o) of this section.

(q) Owners or operators choosing to determine the full charge as defined in § 82.156(j) of an affected appliance by using an established range or using that methodology in combination with other methods for determining the full charge as defined in § 82.156(j) must maintain the following information:

- (1) The identification of the owner or operator of the appliance;
- (2) The location of the appliance;

(3) The original range for the full charge of the appliance, its midpoint, and how the range was determined;

(4) Any and all revisions of the full charge range and how they were determined; and

(5) The dates such revisions occurred.

[58 FR 28712, May 14, 1993, as amended at 59 FR 42957, Aug. 19, 1994; 60 FR 40443, Aug. 8, 1995; 69 FR 11981, Mar. 12, 2004; 70 FR 1992, Jan. 11, 2005; 79 FR 64290, Oct. 28, 2014; 81 FR 82364, Nov. 18, 2016]

§ 82.168 Incorporation by Reference.

(a) Certain material is incorporated by reference into this subpart part with the approval of the Director of the Federal Register under 5 U.S.C. 552(a) and 1 CFR part 51. You can obtain the material from the sources listed below. You may inspect a copy of the approved material at U.S. EPA's Air and Radiation Docket; EPA West Building, Room 3334, 1301 Constitution Ave. NW., Washington, DC, or at the National Archives and Records Administration (NARA). For information on the availability of this material at NARA, call (202) 741-6030 or go to http://www.archives.gov/federal_register/code_of_federal_regulations/ibr_locations.html.

(b) Air-Conditioning, Heating, and Refrigeration Institute (AHRI), 2111 Wilson Boulevard, Suite 500, Arlington, VA 22201, www.ahrinet.org.

(1) AHRI Standard 110-2016, *2016 Standard for Air-Conditioning, Heating and Refrigerating Equipment Nameplate Voltages*, copyright 2016, into Appendix B3 to subpart F.

(2) 2008 Appendix C to AHRI Standard 700-2014, *2008 Appendix C for Analytical Procedures for AHRI Standard 700-2014—Normative*, copyright 2008, into Appendix A to subpart F.

(3) 2008 Appendix D to AHRI Standard 700-2014, *2012 Appendix D for Gas Chromatograms for AHRI Standard 700-2014—Informative*, copyright 2012, into Appendix A to subpart F.

(c) American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc., (ASHRAE), 1791 Tullie Circle NE., Atlanta, GA 30329, U.S.A.

(1) ANSI/ASHRAE Standard 63.2-1996 (RA 2010), *Method of Testing Liquid-Line Filter Drier Filtration Capability*, Re-

affirmed June 26, 2010, into Appendix B3 to subpart F.

(d) ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959, www.astm.org.

(1) ASTM D1296-01 (Reapproved 2012), *Standard Test Method for Odor of Volatile Solvents and Diluents*, approved July 1, 2012, into Appendix A to subpart F.

(2) [Reserved]

(e) Gas Processors Association, 6526 East 60th Street, Tulsa, Oklahoma 74145.

(1) GPA Standard STD-2177-13, *Analysis of Natural Gas Liquid Mixtures Containing Nitrogen and Carbon Dioxide by Gas Chromatography*, Revised, copyright 2013, into Appendix A to subpart F.

(2) [Reserved]

(f) General Services Administration, 301 7th St. SW., Washington, DC 20410.

(1) BB-F-1421B, Federal Specification for "Fluorocarbon Refrigerants," dated March 5, 1982, IBR approved for Appendix A to subpart F.

(2) [Reserved]

(g) International Electrotechnical Commission (IEC), 3, rue de Varembé, P.O. Box 131, CH-1211 Geneva 20—Switzerland, 41 22 919 02 11, <http://www.iec.ch>.

(1) IEC 60038, *IEC Standard Voltages*, Edition 7.0, 2009-06, into Appendix B3 to subpart F.

(2) [Reserved]

(h) Underwriters Laboratories (UL), 333 Pfingsten Road, Northbrook, IL 60062, 847-272-8800, <http://www.ul.com>.

(1) UL 1963, *Standard for Safety Requirements for Refrigerant Recovery/Recycling Equipment*, Fourth Edition (with revisions through October 13, 2013), June 1, 2011, in appendix B3 to subpart F, appendix B4 to subpart F.

(2) [Reserved]

[81 FR 82364, Nov. 18, 2016]

§ 82.169 Suspension and revocation procedures.

(a) Failure to abide by any of the provisions of this subpart may result in the revocation or suspension of the approval to certify technicians (under § 82.161), approval to act as a recovery/recycling equipment testing organization (under § 82.160), or reclaim certification (under § 82.164), hereafter referred to as the "organization." In such

cases, the Administrator or her or his designated representative shall give notice of an impending suspension to the person or organization setting forth the facts or conduct that provide the basis for the revocation or suspension.

(b) Any organization that has received notice of an impending suspension or revocation may choose to request a hearing and must file that request in writing within 30 days of the date of the Agency's notice at the address listed in § 82.160 and shall set forth their objections to the revocation or suspension and data to support the objections.

(c) If the Agency does not receive a written request for a hearing within 30 days of the date of the Agency's notice, the revocation will become effective upon the date specified in the notice of an impending suspension.

(d) If after review of the request and supporting data, the Administrator or her or his designated representative finds that the request raises a substantial factual issue, she or he shall provide the organization with a hearing.

(e) After granting a request for a hearing the Administrator or her or his designated representative shall designate a Presiding Officer for the hearing.

(f) The hearing shall be held as soon as practicable at a time and place determined by the Administrator, the designated representative, or the Presiding Officer.

(g) The Administrator or her or his designated representative may, at his or her discretion, direct that all argument and presentation of evidence be concluded within a specified period established by the Administrator or her or his designated representative. Said period may be no less than 30 days from the date that the first written offer of a hearing is made to the applicant. To expedite proceedings, the Administrator or her or his designated representative may direct that the decision of the Presiding Officer (who need not be the Administrator) shall be the final EPA decision.

(h) Upon appointment pursuant to paragraph (e) of this section, the Presiding Officer will establish a hearing

file. The file shall consist of the following:

(1) The notice issued by the Administrator under § 82.169(a);

(2) the request for a hearing and the supporting data submitted therewith;

(3) all documents relating to the request for certification and all documents submitted therewith; and

(4) correspondence and other data material to the hearing.

(i) The hearing file will be available for inspection by the petitioner at the office of the Presiding Officer.

(j) An applicant may appear in person or may be represented by counsel or by any other duly authorized representative.

(k) The Presiding Officer, upon the request of any party or at his or her discretion, may arrange for a pre-hearing conference at a time and place he or she specifies. Such pre-hearing conferences will consider the following:

(1) Simplification of the issues;

(2) Stipulations, admissions of fact, and the introduction of documents;

(3) Limitation of the number of expert witnesses;

(4) Possibility of agreement disposing of any or all of the issues in dispute; and

(5) Such other matters as may aid in the disposition of the hearing, including such additional tests as may be agreed upon by the parties.

(l) The results of the conference shall be reduced to writing by the Presiding Officer and made part of the record.

(m) Hearings shall be conducted by the Presiding Officer in an informal but orderly and expeditious manner. The parties may offer oral or written evidence, subject to the exclusion by the Presiding Officer of irrelevant, immaterial, and repetitious evidence.

(n) Witnesses will not be required to testify under oath. However, the Presiding Officer shall call to the attention of witnesses that their statements may be subject to the provisions of 18 U.S.C. 1001, which imposes penalties for knowingly making false statements or representations or using false documents in any matter within the jurisdiction of any department or agency of the United States.

Environmental Protection Agency

Pt. 82, Subpt. F, App. A

(o) Any witness may be examined or cross-examined by the Presiding Officer, the parties, or their representatives.

(p) Hearings shall be reported verbatim. Copies of transcripts of proceedings may be purchased by the petitioner from the reporter.

(q) All written statements, charts, tabulations, and similar data offered in evidence at the hearings shall, upon a showing satisfactory to the Presiding Officer of their authenticity, relevancy, and materiality, be received in evidence and shall constitute a part of the record.

(r) Oral argument may be permitted at the discretion of the Presiding Officer and shall be reported as part of the record unless otherwise ordered by the Presiding Officer.

(s) The Presiding Officer shall make an initial decision that shall include written findings and conclusions and the reasons or basis regarding all the material issues of fact, law, or discretion presented on the record. The findings, conclusions, and written decision shall be provided to the parties and made a part of the record. The initial decision shall become the decision of the Administrator without further proceedings, unless there is an appeal to the Administrator or motion for review by the Administrator within 20 days of the date the initial decision was filed.

(t) On appeal from or review of the initial decision, the Administrator or her or his designated representative shall have all the powers which he or she would have in making the initial decision, including the discretion to require or allow briefs, oral argument, the taking of additional evidence, or a remand to the Presiding Officer for additional proceedings. The decision by the Administrator or her or his designated representative shall include written findings and conclusions and the reasons or basis therefore on all the material issues of fact, law, or discretion presented on the appeal or considered in the review.

[68 FR 43809, July 24, 2003]

APPENDIX A TO SUBPART F OF PART 82— SPECIFICATIONS FOR REFRIGERANTS

This appendix is based on the Air-Conditioning, Heating, and Refrigeration Institute

Standard 700-2016, *Specifications for Refrigerants*.

SECTION 1. PURPOSE

1.1 *Purpose.* The purpose of this standard is to evaluate and accept/reject refrigerants regardless of source (*i.e.*, new, reclaimed and/or repackaged) for use in new and existing refrigeration and air-conditioning products as required under 40 CFR part 82.

1.1.1 *Intent.* This standard is intended for the guidance of the industry including manufacturers, refrigerant reclaimers, repackagers, distributors, installers, servicemen, contractors and for consumers.

1.1.2 *Review and Amendment.* This standard is subject to review and amendment as the technology advances.

SECTION 2. SCOPE

2.1 *Scope.* This standard specifies acceptable levels of contaminants (purity requirements) for various fluorocarbon and other refrigerants regardless of source and lists acceptable test methods. These refrigerants are as referenced in the ANSI/ASHRAE Standard 34 with Addenda:

2.1.1 Single-Component Fluorocarbon Refrigerants: R-11, R-12, R-13, R-22, R-23, R-32, R-113, R-114, R-115, R-116, R-123, R-124, R-125, R-134a, R-141b, R-142b, R-143a, R-152a, R-218, R-227ea, R-236fa, R-245fa, R-1233zd(E), R-1234yf, R-1234ze(E);

2.1.2 Single Component Hydrocarbon Refrigerants: R-50, R-170, R-E170, R-290, R-600, R-600a, R-601, R-601a, R-610, R-1150, R-1270;

2.1.3 Carbon Dioxide Refrigerant: R-744;

2.1.4 Zeotropic Blend Refrigerants: R-401A, R-401B, R-402A, R-402B, R-403A, R-403B, R-404A, R-405A, R-406A, R-407A, R-407B, R-407C, R-407D, R-407E, R-407F, R-408A, R-409A, R-409B, R-410A, R-410B, R-411A, R-411B, R-412A, R-413A, R-414A, R-414B, R-415A, R-415B, R-416A, R-417A, R-417B, R-417C, R-418A, R-419A, R-419B, R-420A, R-421A, R-421B, R-422A, R-422B, R-422C, R-422D, R-422E, R-423A, R-424A, R-425A, R-426A, R-427A, R-428A, R-429A, R-430A, R-431A, R-434A, R-435A, R-437A, R-438A, R-439A, R-440A, R-442A, R-444A, R-444B, R-445A, R-446A, R-447A, R-448A, R-449A, R-450A;

2.1.5 Zeotropic Hydrocarbon Blend Refrigerants: R-432A, R-433A, R-433B, R-433C, R-436A, R-436B, R-441A, R-443A; and

2.1.6 Azeotropic Blend Refrigerants: R-500, R-502, R-503, R-507A, R-508A, R-508B, R-509A, R-510A, R-511A, and R-512A.

SECTION 3. DEFINITIONS

3.1 *Definitions.* All terms in this appendix will follow the definitions in §82.152 unless otherwise defined in this appendix.

3.2 *Shall, Should, Recommended, or It Is Recommended* shall be interpreted as follows:

3.2.1 *Shall*. Where “shall” or “shall not” is used for a provision specified, that provision is mandatory if compliance with this appendix is claimed.

3.2.2 *Should*, *Recommended*, or *It is Recommended* is used to indicate provisions which are not mandatory but which are desirable as good practice.

SECTION 4. CHARACTERIZATION OF REFRIGERANTS AND CONTAMINANTS

4.1 *Characterization*. Characterization of single component fluorocarbon (Table 1A) and zeotropic/azeotropic blend (Table 2A/3) refrigerants and contaminants are listed in the following general classifications:

- 4.1.1 Isomer content (see Table 1A)
- 4.1.2 Air and other non-condensables (see Tables 1A, 2A, 3)
- 4.1.3 Water (see Tables 1A, 2A, 3)
- 4.1.4 All other volatile impurities (see Tables 1A, 2A, 3)
- 4.1.5 High boiling residue (see Tables 1A, 2A, 3)
- 4.1.6 Halogenated unsaturated volatile impurities (see Table 1A)
- 4.1.7 Particulates/solids (see Tables 1A, 2A, 3)
- 4.1.8 Acidity (see Tables 1A, 2A, 3)
- 4.1.9 Chloride (see Tables 1A, 2A, 3)
- 4.2 Hydrocarbon Characterization. Characterization of hydrocarbon refrigerants (Tables 1B and 2B) and contaminants are listed in the following general classifications:
 - 4.2.1 Nominal composition
 - 4.2.2 Other allowable impurities
 - 4.2.3 Air and other non-condensables
 - 4.2.4 Sulfur odor
 - 4.2.5 High boiling residue
 - 4.2.6 Particulates/solids
 - 4.2.7 Acidity
 - 4.2.8 Water
 - 4.2.9 All other volatile impurities
 - 4.2.10 Total C3, C4, and C5 polyolefins
- 4.3 Carbon Dioxide Characterization. Characterization of carbon dioxide (Table 1C) and its contaminants are listed in the following general classifications:
 - 4.3.1 Purity
 - 4.3.2 Air and other non-condensables
 - 4.3.3 Water
 - 4.3.4 High boiling residue
 - 4.3.5 Particulates/solids

SECTION 5. SAMPLING AND SUMMARY OF TEST PROCEDURES

5.1 *Referee Test*. The referee test methods for the various contaminants are summarized in the following paragraphs. Detailed test procedures are included in *2008 Appendix C to AHRI Standard 700–2014* (incorporated by reference, see §82.168). If alternative test methods are employed, the user must be able to demonstrate that they produce results at least equivalent to the specified referee test method.

5.2 Refrigerant Sampling

5.2.1 *Sampling Precautions*. Special precautions should be taken to ensure that representative samples are obtained for analysis. Sampling shall be done by qualified personnel following accepted sampling and safety procedures. Refrigerants with critical temperatures near or below ambient temperature cannot be reliably sampled for both liquid and vapor phase without special handling.

Note: Flammable refrigerants which are ASHRAE 34 class 2L, 2, or 3 present additional safety challenges and require additional measures for sampling safety procedures compared to nonflammable halocarbons documented in this standard.

5.2.2 *Cylinder Preparation*. Place a clean, empty sample cylinder with the valve open in an oven at 110 °C (230 °F) for one hour. Remove it from the oven while hot, immediately connect it to an evacuation system and evacuate to less than 56 kPa. Close the valve and allow it to cool. Weigh the empty cylinder.

5.2.3 *Vapor Phase Sampling*. A vapor phase sample shall be obtained for determining the non-condensables. The source temperature shall be measured and recorded at the time the sample is taken.

5.2.3.1 *Special Handling for Low Critical Temperature Refrigerant*. A vapor phase sample is required to determine non-condensables and volatile impurities, including other refrigerants. The vapor phase sample is obtained by regulating the sample container temperature to 5 K or more above the refrigerant critical temperature.

5.2.3.2 *Handling for Liquid Refrigerants with Boiling Points Near or Above Room Temperature*. Since R-11, R-113, R-123, R-141b, R-245fa, and R-1233zd(E) have normal boiling points near or above room temperature, non-condensable determination is not required for these refrigerants.

Note: Non-condensable gases, if present, will concentrate in the vapor phase of the refrigerant; care must be exercised to eliminate introduction of either air or liquid phase refrigerant during the sample transfer.

5.2.4 *Liquid Phase Sampling*. A liquid phase sample is required for all tests listed in this standard except the test for non-condensables.

5.2.4.1 *Liquid Sampling*. Accurate analysis requires that the sample cylinder, at ambient temperature, be filled to at least 60 percent by volume; however, under no circumstances should the cylinder be filled to more than 80 percent by volume. This can be accomplished by weighing the empty cylinder and then the cylinder with refrigerant. When the desired amount of refrigerant has been collected, close the valve(s) and immediately disconnect the sample cylinder.

Note: Care should be taken to ensure that all connections and transfer lines are dry

and evacuated to avoid contaminating the sample.

Note: Low critical temperature refrigerants can have extremely high pressure and the sampling vessel, all connections, and transfer lines must be designed to handle high pressures.

5.2.4.2 Special Handling for Low Critical Temperature Refrigerant. A liquid phase sample is required for all testing except volatile impurities, including other refrigerants. The liquid phase sample is obtained by regulating the sample cylinder temperature to 2 °C below the critical temperature of the refrigerant.

Note: If free water is present in the sample, cooling to below 0 °C may result in the formation of ice. Clathrates may form at temperatures above 0 °C with some fluorocarbon refrigerants.

5.2.4.3 Record Weight. Check the sample cylinder for leaks and record the gross weight.

5.3 Refrigerant Identification. The required method shall be gas chromatography (GC) as described in *2008 Appendix C to AHRI Standard 700-2014* (incorporated by reference, see §82.168) with the corresponding gas chromatogram figures as illustrated in *2012 Appendix D to AHRI Standard 700-2014* (incorporated by reference, see §82.168). The chromatogram of the sample shall be compared to known standards.

5.3.2 Alternative Method. Determination of the boiling point and boiling point range is an acceptable alternative test method which can be used to characterize refrigerants. The test method shall be that described in section 4.4.3 of BB-F-1421B (incorporated by reference, see §82.168).

5.3.3 Required Values. The required values for boiling point and boiling point range are given in Table 1A, *Physical Properties of Single Component Refrigerants*; Table 1B, *Physical Properties of Zeotropic Blends (400 Series Refrigerants)*; and Table 1C, *Physical Properties of Azeotropic Blends (500 Series Refrigerants)*.

5.4 Water Content.

5.4.1 Method. The Coulometric Karl Fischer Titration shall be the primary test method for determining the water content of refrigerants. This method is described in *2008 Appendix C to AHRI Standard 700-2014* (incorporated by reference, see §82.168). This method can be used for refrigerants that are either a liquid or a gas at room temperature. For all refrigerants, the sample for water analysis shall be taken from the liquid phase of the container to be tested.

5.4.2 Limits. The value for water content shall be expressed in parts per million (ppm) by weight and shall not exceed the maximum specified in Tables 1A, 1B, 1C, 2A, 2B, and 3.

5.5 Conductivity. (Alternative to chloride and acidity tests).

5.5.1 Method. A refrigerant may be tested for conductivity as an indication of the pres-

ence of acids, metal chlorides, and any compound that ionizes in water. This alternative procedure is intended for use with new or reclaimed refrigerants, however, significant amounts of oil can interfere with the test results.

5.5.2 Limits. The value for conductivity shall be converted to and expressed in ppm by weight calculated as HCl and shall be compared with the maximum acidity value specified (see in Tables 1A, 1B, 1C, 2A, 2B, and 3). If the conductivity is above this amount, then the chloride and acidity tests shall be conducted. If the conductivity is not greater than this amount, then the chloride and acidity tests may be omitted.

5.6 Chloride. The refrigerant shall be tested for chloride as an indication of the presence of hydrochloric acid and/or metal chlorides. The referee procedure is intended for use with new or reclaimed halogenated refrigerants; however, high boiling residue in excess of the amounts in Tables 1A, 1B, 1C, 2A, 2B, and 3 can interfere with the test results.

5.6.1 Method. The test method shall be that described in *2008 Appendix C to AHRI Standard 700-2014* (incorporated by reference, see §82.168). The test will show noticeable turbidity at chloride levels of about 3 ppm or greater by weight.

5.5.2 Limits. The results of the test shall not exhibit any sign of turbidity. Report the results as "pass" or "fail."

5.7 Acidity.

5.7.1 Method. The acidity test uses the titration principle to detect any compound that is soluble in water and ionizes as an acid. The test method shall be that described in *2008 Appendix C to AHRI Standard 700-2014* (incorporated by reference, see §82.168). This test may not be suitable for determination of high molecular weight organic acids; however these acids will be found in the high boiling residue test outlined in Section 5.8. The test requires a 50 to 60 gram sample and has a detection limit of 0.1 ppm by weight calculated as HCl.

5.7.2 Limits. The value for acidity shall be expressed in ppm by weight as HCl and shall not exceed the limits in Tables 1A, 1B, 2A, 2B, and 3.

5.8 High Boiling Residue.

5.8.1 Method. High boiling residue shall be determined by either volume or weight. The volume method measures the residue from a standard volume of refrigerant after evaporation. The gravimetric method is described in *2008 Appendix C to AHRI Standard 700-2014* (incorporated by reference, see §82.168). Oils and/or organic acids will be captured by these methods.

5.8.2 Limits. The value for high boiling residue shall be expressed as a percentage by volume or weight and shall not exceed the maximum percent specified in Tables 1A, 1B, 1C, 2A, 2B, and 3.

5.9 *Particulates and Solids.*

5.9.1 *Method.* A measured amount of sample shall be placed in a Goetz bulb under controlled temperature conditions. The particulates/solids shall be determined by visual examination of the Goetz bulb prior to the evaporation of refrigerant. For details of this test method, refer to Part 3 of *2008 Appendix C to AHRI Standard 700–2014* (incorporated by reference, see §82.168).

Note: R-744 will partially sublime when measuring a known amount of liquid sample into the dry Goetz bulb and the solid R-744 will interfere with the visual examination of particulates/solids. Determining the particulates/solids shall be completed by visual examination of the Goetz bulb after the evaporation of the refrigerant.

5.9.2 *Limits.* Visual presence of dirt, rust, or other particulate contamination is reported as “fail.”

5.10 *Non-Condensables.*

5.10.1 *Method.* A vapor phase sample shall be used for determination of non-condensables. Non-condensable gases consist primarily of air accumulated in the vapor phase of refrigerants where the solubility of air in the refrigerant liquid phase is extremely low and air is not significant as a liquid phase contaminant. The presence of non-condensable gases may reflect poor quality control in transferring refrigerants to storage tanks and cylinders.

The test method shall be gas chromatography with a thermal conductivity detector as described in *2008 Appendix C to AHRI Standard 700–2014* (incorporated by reference, see §82.168).

5.10.2 *Limits.* The maximum level of non-condensables in the vapor phase of a test sample shall not exceed the maximum at 25 °C as shown in Tables 1A, 1B, 1C, 2A, 2B, and 3.

5.11 *All Other Volatile Impurities and/or Other Refrigerants.*

5.11.1 *Method.* The amount of volatile impurities including other refrigerants in the subject refrigerant shall be determined by gas chromatography as described in *2008 Appendix C to AHRI Standard 700–2014* (incorporated by reference, see §82.168).

5.11.2 *Limits.* The test sample shall not contain more than 0.5 percent by weight of volatile impurities including other refrigerants as shown in Tables 1A, 1B, 1C, 2A, 2B and 3.

5.12 *Total C₃, C₄ and C₅ Polyolefins in Hydrocarbon Refrigerants.*

5.12.1 *Method.* The amount of polyolefin impurities in the hydrocarbon shall be determined by gas chromatography as described in GPA Standard 2177–13 (incorporated by reference, see §82.168).

5.12.2 *Limits.* The test sample shall not contain more than 0.05 percent by weight in the hydrocarbon sample as shown in Tables 1B and 2B. Report the results as “pass” or “fail.”

5.13 *Sulfur Odor in Hydrocarbon Refrigerants.*

5.13.1 *Method.* The amount of sulfur containing compounds or other compounds with an odor shall be determined by ASTM D1296–01 (Reapproved 2012) (incorporated by reference, see §82.168).

5.13.2 *Limits.* The test sample paper shall not emit a residual sulfur odor as shown in Tables 1B and 2B.

SECTION 6. REPORTING PROCEDURE

6.1 *Reporting Procedure.* The source (manufacturer, reclaimer, or repackager) of the packaged refrigerant shall be identified. The refrigerant shall be identified by its accepted refrigerant number and/or its chemical name. Maximum allowable levels of contaminants are shown in Tables 1A, 1B, 1C, 2A, 2B, and 3. Test results shall be tabulated in a similar manner.

Table 1A. Single Component Fluorocarbon Refrigerants and their Allowable Levels of Contaminants										
	Reporting Units	Reference Section	R-11	R-12	R-13	R-22	R-23	R-32	R-113	R-114
CHARACTERISTICS:										
Boiling Point ¹	°C @ 101.3 kPa ²	N/A	23.7	-29.8	-81.5	-40.8	-82	-51.7	47.6	3.6
Boiling Point Range ¹	K	N/A	± 0.3	± 0.3	± 0.5	± 0.3	± 0.5	± 0.3	± 0.3	± 0.3
Critical Temperature ¹	°C	N/A	198	112	28.9	96.2	26.1	78.1	214.1	145.7
Isomer Content	% by weight	N/A	N/A	N/A	N/A	N/A	N/A	N/A	0-1 R-133a	0-30 R-144a
VAPOR PHASE CONTAMINANTS:										
Air and Other Non-condensables, Maximum	% by volume @ 25.0 °C	5.10	N/A ²	1.5	1.5	1.5	1.5	1.5	N/A ²	1.5
LIQUID PHASE CONTAMINANTS:										
Water, Maximum	ppm by weight	5.4	20	10	10	10	10	10	20	10
All Other Volatile Impurities, Maximum	% by weight	5.11	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
High Boiling Residue, Maximum	% by volume or % by weight	5.8	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Particulates/Solids	Pass or Fail	5.9	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean
Acidity, Maximum	ppm by weight (as HCl)	5.7	1	1	1	1	1	1	1	1
Chloride ³	Pass or Fail	5.6	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity

Table 1A. Single Component Fluorocarbon Refrigerants and their Allowable Levels of Contaminants (continued)									
	Reporting Units	Reference Section	R-115	R-116	R-123	R-124	R-125	R-134a	R-141b
CHARACTERISTICS:									
Boiling Point ¹	°C @ 101.3 kPa	N/A	-38.9	-78.2	27.8	-12	-48.1	-26.1	32
Boiling Point Range ¹	K	N/A	± 0.3	± 0.3	± 0.3	± 0.3	± 0.3	± 0.3	± 0.3
Critical Temperature ¹	°C	N/A	80	19.9	183.7	122.3	66	101.1	206.8
Isomer Content	% by weight	N/A	N/A	N/A	0-8 R-123a+ R-123b	0-5 R-124a	N/A	0-0.5 R-134	0-0.1ea R-141, R-141a
VAPOR PHASE CONTAMINANTS:									
Air and Other Non-condensables, Max.	% by volume @ 25.0 °C	5.10	1.5	1.5	N/A ²	1.5	1.5	1.5	N/A ²
LIQUID PHASE CONTAMINANTS:									
Water, Max.	ppm by weight	5.4	10	10	20	10	10	10	100
All Other Volatile Impurities, Max.	% by weight	5.11	0.5	0.5	0.5	0.5	0.5	0.5	0.9
High Boiling Residue, Max.	% by volume or % by weight	5.8	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Particulates/Solids	Pass or Fail	5.9	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean
Acidity, Max.	ppm by weight (as HCl)	5.7	1	1	1	1	1	1	1
Chloride ³	Pass or Fail	5.6	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity

Table 1A. Single Component Fluorocarbon Refrigerants and their Allowable Levels of Contaminants (continued)													
	Reporting Units	Reference Section	R-142b	R-143a	R-152a	R-218	R-227ea	R-236fa	R-245fa	R-1233zd(E)	R-1234yf	R-1234ze(E)	R-1336mzz(Z)
CHARACTERISTICS:													
Boiling Point ¹	°C @ 101.3 kPa	N/A	-9.2	-47.2	-24	-36.8	-16.5	-1.4	14.9	18.3	-29.4	-19	33.4
Boiling Point Range ¹	K	N/A	--	± 0.3	± 0.3	± 0.3	--	± 0.3	± 0.3	--	N/A	N/A	N/A
Critical Temperature ¹	°C	N/A	137.1	72.7	113.3	72	101.7	124.9	154.1	165.6	94.8	109.4	171.3
Isomer Content	% by weight	N/A	0-0.1ea R-142, R-142a	0-0.01 R-143	N/A	--	--	--	0-0.1ea R-245ca, R-245cb, R-245ca, R-245eb	--	N/A	0.3 R- 1234ze(Z)	0 - 0.1 R- 1336mzz(E)
VAPOR PHASE CONTAMINANTS:													
Air and Other Non-condensables, Max.	% by volume @ 25.0 °C	5.10	2	1.5	1.5	1.5	1.5	1.5	N/A ²	N/A ²	1.5	1.5	N/A ²
LIQUID PHASE CONTAMINANTS:													
Water, Maximum	ppm by weight	5.4	15	10	10	10	10	10	20	20	10	10	20
All Other Volatile Impurities, Max.	% by weight	5.11	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
High Boiling Residue, Max.	% by volume or % by weight	5.8	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Particulates/Solids	Pass or Fail	5.9	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean
Acidity, Max.	ppm by weight (as HCl)	5.7	3	1	1	1	1	1	1	1	1	1	1
Chloride ³	Pass or Fail	5.6	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity
1. Boiling points, boiling point ranges, and critical temperatures, although not required, are provided for informational purposes. Refrigerant data compiled from Refprop 9.1. 2. Since R-11, R-113, R-123, R-141b, R-245fa, R-1233zd(E), and R-1336mzz(Z) have normal boiling points near or above room temperature, non-condensable determinations are not required for these refrigerants 3. Recognized chloride level for pass/fail is about 3 ppm. -- Data Not Available													

Table 1B. Single Component Hydrocarbon Refrigerants and their Allowable Levels of Contaminants												
	Reporting Units	R-50	R-170	R-E170	R-290	R-600	R-600a	R-601	R-601a	R-610	R-1150	R-1270
CHARACTERISTICS:												
Boiling Point ¹	°C at 101.3 kPa	-161.5	-88.6	-24.8	-42.1	-0.5	-11.8	36.1	27.8	34.6	-103.8	-47.6
Boiling Point Range ¹	K	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5
Minimum Nominal Composition	% weight	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
Other Allowable Impurities	% weight	N/A	N/A	N/A	2 (see footnote ²)	2 (see footnote ²)	2 (see footnote ²)	0-1 R-601a	0-1 R-601	N/A	N/A	0-1 R-290
VAPOR PHASE CONTAMINANTS ³ :												
Air and Other Non-condensables, Maximum	% by volume @ 25.0 °C	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
LIQUID PHASE CONTAMINANTS ⁴ :												
Sulfur Odor	Pass or Fail	No sulfur odor	No sulfur odor	No sulfur odor	No sulfur odor	No sulfur odor	No sulfur odor	No sulfur odor	No sulfur odor	No sulfur odor	No sulfur odor	No sulfur odor
High Boiling Residue, Max.	% weight	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Particulates/Solids	Pass or Fail	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean
Acidity, Max.	ppm by weight (as HCl)	1	1	1	1	1	1	1	1	1	1	1
Water, Max.	mg kg ⁻¹	10	10	10	10	10	10	10	10	10	10	10
All Other Volatile Impurities, Max.	% weight	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Total C3, C4 and C5 Polyolefins, Max.	% weight	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
1. Boiling points, boiling point ranges, although not required, are provided for informational purposes.												
2. 2% of other C3 and C4 saturated hydrocarbons are allowed												
3. Taken from vapor phase												
4. Vaporized from liquid phase												

1. Boiling points, boiling point ranges, although not required, are provided for informational purposes.

2. 2% of other C3 and C4 saturated hydrocarbons are allowed

3. Taken from vapor phase

4. Vaporized from liquid phase

Table 2A. Zeotropic Blends (400 Series Refrigerants) and their Allowable Levels of Contaminants										
	Reporting Units	Reference Section	R-401A	R-401B	R-402A	R-402B	R-403A	R-403B	R-404A	R-405
CHARACTERISTICS:										
Refrigerant Components	N/A	N/A	R-22/ 152a/124	R-22/ 152a/124	R-125/ 290/22	R-125/ 290/22	R-290/ 22/218	R-290/ 22/218	R-125/ 143a/134a	R-22/152a/ 142b/C318
Nominal Composition	% by weight	N/A	53.0/13.0/ 34.0	61.0/11.0/ 28.0	60.0/2.0/ 38.0	38.0/2.0/60.0	5.0/75.0/ 20.0	5.0/56.0/ 39.0	44.0/52.0/ 4.0	45.0/7.0/5.5/42.5
Allowable Composition	% by weight	N/A	51.0-55.0/ 11.5-13.5/ 33.0-35.0	59.0-63.0/ 9.5-11.5/ 27.0-29.0	58.0-62.0/ 1.0-2.1/ 36.0-40.0	36.0-40.0/ 1.0-2.1/ 58.0-62.0	3.0-5.2/ 73.0-77.0/ 18.0-22.0	3.0-5.2/ 54.0-58.0/ 37.0-41.0	42.0-46.0/ 51.0-53.0/ 2.0-6.0	43.0-47.0/ 6.0-8.0/ 4.5-6.5/ 40.5-44.5
Bubble Point ¹	°C @ 101.3 kPa	N/A	-33.3	-34.9	-49	-47	-47.8	-49.2	-46.2	-32.9
Dew Point ¹	°C @ 101.3 kPa	N/A	-26.4	-28.8	-46.9	-44.7	-44.3	-46.8	-45.5	-24.5
Critical Temperature ¹	°C	N/A	105.3	103.5	76	83	87	79.7	72.1	106
VAPOR PHASE CONTAMINANTS:										
Air and Other Non-condensables, Max.	% by volume @ 25.0 °C	5.10	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
LIQUID PHASE CONTAMINANTS:										
Water, Max.	ppm by weight	5.4	10	10	10	10	10	10	10	10
All Other Volatile Impurities, Max.	% by weight	5.11	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
High Boiling Residue, Max.	% by volume or % by weight	5.8	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Particulates/Solids	Pass or Fail	5.9	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean
Acidity, Max.	ppm by weight (as HCl)	5.7	1	1	1	1	1	1	1	1
Chloride ²	Pass or Fail	5.6	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity

Table 2A. Zeotropic Blends (400 Series Refrigerants) and their Allowable Levels of Contaminants (continued)											
	Reporting Units	Reference Section	R-406A	R-407A	R-407B	R-407C	R-407D	R-407E	R-407F	R-407G	R-408A
CHARACTERISTICS:											
Refrigerant Components	N/A	N/A	R-22/600a/142b	R-32/125/134a	R-32/125/134a	R-32/125/134a	R-32/125/134a	R-32/125/134a	R-32/125/134a	R-32/125/134a	R-125/143a/22
Nominal Composition	% by weight	N/A	55.0/4.0/41.0	20.0/40.0/40.0	10.0/70.0/20.0	23.0/25.0/52.0	15.0/15.0/70.0	25.0/15.0/60.0	30.0/30.0/40.0	2.5/2.5/95.0	7.0/46.0/47.0
Allowable Composition	% by weight	N/A	53.0-57.0/3.0-5.0/40.0-42.0	18.0-22.0/38.0-42.0/38.0-42.0	8.0-12.0/68.0-72.0/18.0-22.0	21.0-25.0/23.0-27.0/50.0-54.0	13.0-17.0/13.0-17.0/68.0-72.0	23.0-27.0/13.0-17.0/58.0-62.0	28.0-32.0/28.0-32.0/38.0-42.0	2.0-3.0/2.0-3.0/94.0-96.0	5.0-9.0/45.0-47.0/45.0-49.0
Bubble Point ¹	°C @ 101.3 kPa	N/A	-32.7	-45.3	-46.8	-43.6	-39.5	-42.9	-46.1	-29.2	-44.6
Dew Point ¹	°C @ 101.3 kPa	N/A	-23.5	-38.9	-42.5	-36.6	-32.9	-35.8	-39.7	-27.2	-44.1
Critical Temperature ¹	°C	N/A	116.5	82.3	75	86	91.4	88.5	83	99.5	83.1
VAPOR PHASE CONTAMINANTS:											
Air and Other Non-condensables, Max.	% by volume @ 25.0 °C	5.10	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
LIQUID PHASE CONTAMINANTS:											
Water, Max.	ppm by weight	5.4	10	10	10	10	10	10	10	10	10
All Other Volatile Impurities, Max.	% by weight	5.11	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
High Boiling Residue, Max.	% by volume or % by weight	5.8	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Particulates/Solids	Pass or Fail	5.9	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean
Acidity, Max.	ppm by weight	5.7	1	1	1	1	1	1	1	1	1
Chloride ²	Pass or Fail	5.6	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity

Table 2A. Zeotropic Blends (400 Series Refrigerants) and their Allowable Levels of Contaminants (continued)										
	Reporting Units	Reference Section	R-409A	R-409B	R-410A	R-410B	R-411A	R-411B	R-412A	R-413A
CHARACTERISTICS:										
Refrigerant Components	N/A	N/A	R-22/ 124/142b	R-22/ 124/142b	R-32/125	R-32/125	R-1270/ 22/152a	R-1270/ 22/152a	R-22/218/ 142b	R-218/ 134a/600a
Nominal Composition	% by weight	N/A	60.0/25.0/ 15.0	65.0/25.0/ 10.0	50.0/50.0	45.0/55.0	1.5/87.5 /11.0	3.0/94.0/ 3.0	70.0/5.0/ 25.0	9.0/88.0/3.0
Allowable Composition	% by weight	N/A	58.0-62.0/ 23.0-27.0/ 14.0-16.0	63.0-67.0/ 23.0-27.0/ 9.0-11.0	48.5-50.5/ 49.5-51.5	44.0-46.0/ 54.0-56.0	0.5-1.5/ 87.5-89.5/ 10.0-11.0	2.0-3.0/ 94.0-96.0/ 2.0-3.0	68.0-72.0/ 3.0-7.0/ 24.0-26.0	8.0-10.0/ 86.0-90.0/ 2.0-3.0
Bubble Point ¹	°C @ 101.3 kPa	N/A	-34.7	-35.6	-51.4	-51.3	-39.5	-41.6	-38	-30.6
Dew Point ¹	°C @ 101.3 kPa	N/A	-26.4	-27.9	-51.4	-51.6	-36.6	-40	-28.7	-27.9
Critical Temperature ¹	°C	N/A	106.9	106.9	71.4	70.8	99.1	96	107.2	98.5
VAPOR PHASE CONTAMINANTS:										
Air and Other Non-condensables, Max.	% by volume @ 25.0 °C	5.10	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
LIQUID PHASE CONTAMINANTS:										
Water, Maximum	ppm by weight	5.4	10	10	10	10	10	10	10	10
All Other Volatile Impurities, Max.	% by weight	5.11	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
High Boiling Residue, Max.	% by volume or % by weight	5.8	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Particulates/Solids	Pass or Fail	5.9	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean
Acidity, Max.	ppm by weight (as HCl)	5.7	1	1	1	1	1	1	1	1
Chloride ²	Pass or Fail	5.6	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity

Table 2A. Zeotropic Blends (400 Series Refrigerants) and their Allowable Levels of Contaminants (continued)									
	Reporting Units	Reference Section	R-414A	R-414B	R-415A	R-415B	R-416A	R-417A	R-417B
CHARACTERISTICS:									
Refrigerant Components	N/A	N/A	R-22/124/ 600a/142b	R-22/124/ 600a/142b	R-22/152a	R-22/152a	R-134a/ 124/600	R-125/ 134a/600	R-125/ 134a/600
Nominal Composition	% by weight	N/A	51.0/28.5/ 4.0/16.5	50.0/39.0/ 1.5/9.5	82.0/18.0	25.0/75.0	59.0/39.5/1.5	46.6/50.0/3.4	79.0/18.3/2.7
Allowable Composition	% by weight	N/A	49.0-53.0/ 26.5-30.5/ 3.5-4.5/ 15.5-17.0	48.0-52.0/ 37.0-41.0/ 1.0-2.0/ 8.5-10.0	81.0-83.0/ 17.0-19.0	24.0-26.0/ 74.0-76.0	58.0-59.5/ 39.0-40.5/ 1.3-1.6	45.5-47.7/ 49.0-51.0/ 3.0-3.5	78.0-80.0/ 17.3-19.3/ 2.2-2.8
Bubble Point ¹	°C @ 101.3 kPa	N/A	-34	-32.9	-37.5	-27.7	-23.4	-38	-44
Dew Point ¹	°C @ 101.3 kPa	N/A	-25.8	-24.3	-34.7	-26.2	-21.8	-32.9	-41.5
Critical Temperature ¹	°C	N/A	110.7	111	100	111.3	108.2	89.9	75.2
VAPOR PHASE CONTAMINANTS:									
Air and Other Non-condensables, Max.	% by volume @ 25.0 °C	5.10	1.5	1.5	1.5	1.5	1.5	1.5	1.5
LIQUID PHASE CONTAMINANTS:									
Water, Max.	ppm by weight	5.4	10	10	10	10	10	10	10
All Other Volatile Impurities, Max.	% by weight	5.11	0.5	0.5	0.5	0.5	0.5	0.5	0.5
High Boiling Residue, Max.	% by volume or % by weight	5.8	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Particulates/Solids	Pass or Fail	5.9	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean
Acidity, Max.	ppm by weight (as HCl)	5.7	1	1	1	1	1	1	1
Chloride ²	Pass or Fail	5.6	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity

Table 2A. Zeotropic Blends (400 Series Refrigerants) and their Allowable Levels of Contaminants (continued)											
	Reporting Units	Reference Section	R-417C	R-418A	R-419A	R-419B	R-420A	R-421A	R-421B	R-422A	R-422B
CHARACTERISTICS:											
Refrigerant Components	N/A	N/A	R-125/ 134a/600 1.7	R-290/ 22/152a 2.5	R-125/ 134a/ E170 4.0	R-125/ 134a/E17 0 3.5	R-134a/ 142b 88.0/12.0	R-125/ 134a 58.0/42.0	R-125/ 134a 85.0/15.0	R-125/ 134a/600a 85.1/11.5/ 3.4	R-125/ 134a/600a 55.0/42.0/ 3.0
Nominal Composition	% by weight	N/A	19.5/78.8/ 1.7	1.5/96.0/ 2.5	77.0/19.0/ 4.0	48.5/48.0/ 3.5	88.0/12.0	58.0/42.0	85.0/15.0	85.1/11.5/ 3.4	55.0/42.0/ 3.0
Allowable Composition	% by weight	N/A	18.5-20.5/ 77.8-79.8/ 1.2-1.8	1.0-2.0/ 95.0/97.0/ 2.0-3.0	76.0-78.0/ 18.0-20.0/ 3.0-5.0	47.5-49.5/ 47.0-49.0/ 3.0-4.0	88.0-89.0/ 11.0-12.0	57.0-59.0/ 41.0-43.0	84.0-86.0/ 14.0-16.0	84.1-86.1/ 10.5-12.5/ 3.0-3.5	54.0-56.0/ 41.0-43.0/ 2.5-3.1
Bubble Point ¹	°C @ 101.3 kPa	N/A	-32.7	-41.2	-42.6	-37.4	-25	-40.8	-45.7	-46.5	-40.5
Dew Point ¹	°C @ 101.3 kPa	N/A	-29.2	-40.1	-36	-31.5	-24.2	-35.5	-42.6	-44.1	-35.6
Critical Temperature ¹	°C	N/A	95.4	96.7	79.1	90.4	105.4	78.5	69	71.7	85.7
VAPOR PHASE CONTAMINANTS:											
Air and Other Non-condensables, Max.	% by volume @ 25.0 °C	5.10	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
LIQUID PHASE CONTAMINANTS:											
Water, Max.	ppm by weight	5.4	10	10	10	10	20	10	10	10	10
All Other Volatile Impurities, Max.	% by weight	5.11	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
High Boiling Residue, Max.	% by volume or % by weight	5.8	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Particulates/Solids	Pass or Fail	5.9	Visually clean	Visually clean	Visually Clean	Visually clean	Visually clean	Visually Clean	Visually clean	Visually clean	Visually clean
Acidity, Max.	ppm by weight (as HCl)	5.7	1	1	1	1	1	1	1	1	1
Chloride ²	Pass or Fail	5.6	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity

Table 2A. Zeotropic Blends (400 Series Refrigerants) and their Allowable Levels of Contaminants (continued)											
	Reporting Units	Reference Section	R-422C	R-422D	R-422E	R-423A	R-424A	R-425A	R-426A	R-427A	R-428A
CHARACTERISTICS:											
Refrigerant Components	N/A	N/A	R-125/ 134a/600a	R-125/ 134a/600a	R-125/ 134a/600a	R-134a/ 227ea	R-125/ 134a/600a/ 600/601a	R-32/134a/ 227ea	R- 125/134a/ 600/601a	R-32/125/ 143a/134a	R-125/143a/ 290/600a
Nominal Composition	% by weight	N/A	82.0/15.0/ 3.0	65.1/30.5/ 3.4	58.0/39.3/ 2.7	52.5/47.5	50.5/47.0/ 0.9/1.0/0.6	18.5/69.5/ 12.0	5.1/93.0/ 1.3/0.6	15.0/25.0/ 10.0/50.0	77.5/20.0/ 0.6/1.9
Allowable Composition	% by weight	N/A	81.0-83.0/ 14.0-16.0/ 2.5-3.1	64.0-66.0/ 30.5-32.5/ 3.0-3.5	57.0-59.0/ 38.0-41.0/ 2.5-3.0	51.5-53.5/ 46.5-48.5	49.5-51.5/ 46.0-48.0/ 0.7-1.0/ 0.8-1.1/ 0.4-0.7	18.0-19.0/ 69.0-70.0/ 11.5-12.5	4.1-6.1/ 92.0-94.0/ 1.1-1.4/ 0.4-0.7	13.0-17.0/ 23.0-27.0/ 8.0-12.0/ 48.0-52.0	76.5-78.5/ 19.0-21.0/ 0.4-0.7/ 1.7-2.0
Bubble Point ¹	°C @ 101.3 kPa	N/A	-45.3	-43.2	-41.8	-24.2	-39.1	-38.1	-28.5	-43	-48.3
Dew Point ¹	°C @ 101.3 kPa	N/A	-42.3	-38.4	-36.4	-23.5	-33.3	-31.3	-26.7	-36.3	-47.5
Critical Temperature ¹	°C	N/A	76.1	79.6	82.2	99	87.5	93.9	100.2	85.3	69
VAPOR PHASE CONTAMINANTS:											
Air and Other Non-condensables, Max.	% by volume @ 25.0 °C	5.10	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
LIQUID PHASE CONTAMINANTS:											
Water, Max.	ppm by weight	5.4	10	10	20	10	10	10	10	10	10
All Other Volatile Impurities, Max.	% by weight	5.11	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
High Boiling Residue, Max.	% by volume or % by weight	5.8	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Chloride ²	Pass or Fail	5.6	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity

Table 2A. Zeotropic Blends (400 Series Refrigerants) and their Allowable Levels of Contaminants (continued)											
	Reporting Units	Reference Section	R-429A	R-430A	R-431A	R-434A	R-435A	R-437A	R-438A	R-439A	R-440A
CHARACTERISTICS:											
Refrigerant Components	N/A	N/A	R-E170/ 152a/600a	R-152a/ 600a	R290/152a	R-125/ 143a/134a/ 600a	R-E170/ 152a	R-125/ 134a/600 /601a	R-32/125/ 134a/600 /601a	R-32/125/ 600a	R-290/ 134a/152a
Nominal Composition	% by weight	N/A	60.0/10.0/ 30.0	76.0/24.0	71.0/29.0	63.2/18.0/ 16.0/2.8	80.0/20.0	19.5/78.5/ 1.4/0.6	8.5/45.0/ 44.2/1.7/ 0.6	50/47.0/ 3.0	0.6/1.6/97.8
Allowable Composition	% by weight	N/A	59.0-61.0/ 9.0-11.0/ 29.0-31.0	75.0-77.0/ 23.0-25.0	70.0-72.0/ 28.0-30.0	62.2-64.2/ 17.0-19.0/ 15.0-17.0/ 2.6-2.9	79.0-81.0/ 19.0-21.0	17.7-20.0/ 77.8-80.0/ 1.2-1.5/ 0.4-0.7	43.5-46.5/ 42.7-45.7/ 1.5-1.8/ 0.4-0.7	49.0-51.0/ 46.0-48.0/ 2.5-3.5	0.5-0.7/ 1.0-2.2/ 97.3-98.3
Bubble Point ¹	°C @ 101.3 kPa	N/A	-25.5	-27.6	-43.2	-45.1	-26	-32.9	-43	-52	-25.5
Dew Point ¹	°C @ 101.3 kPa	N/A	-24.9	-27.4	-43.2	-42.4	-25.8	-29.2	-36.4	-51.7	-24.3
Critical Temperature ¹	°C	N/A	123.5	107	100.3	75.6	125.2	95.3	84.2	72	112.9
VAPOR PHASE CONTAMINANTS:											
Air and Other Non-condensables, Max.	% by volume @ 25.0 °C	5.10	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
LIQUID PHASE CONTAMINANTS:											
Water, Maximum	ppm by weight	5.4	10	10	20	20	10	10	20	10	10
All Other Volatile Impurities, Max.	% by weight	5.11	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
High Boiling Residue, Max.	% by volume or % by weight	5.8	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Particulates/Solids	Pass or Fail	5.9	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean
Acidity, Max.	ppm by weight (as HCl)	5.7	1	1	1	1	1	1	1	1	1
Chloride ²	Pass or Fail	5.6	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity

Table 2A. Zeotropic Blends (400 Series Refrigerants) and their Allowable Levels of Contaminants (continued)											
	Reporting Units	Reference Section	R-442A	R-444A	R-444B	R-445A	R-446A	R-447A	R-448A	R-449A	R-449B
CHARACTERISTICS:											
Refrigerant Components	N/A	N/A	R-32/125/ 134a/152a/ 227ea	R-32/152a/ 1234ze(E)	R-32/152a/ 1234ze(E)	R-744/ 134a/ 1234ze(E)	R-32/ 1234ze(E)/ 600	R-32/ 125/ 1234ze (E)	R-32/125/ 1234a/ 1234ze(E)	R-32/125/ 1234yf/ 134a	R-32/125/ 1234yf/134a
Nominal Composition	% by weight	N/A	31.0/31.0/ 30.0/3.0/ 5.0	12.0/5.0/ 83.0	41.5/10.0/ 48.5	6.0/9.0/ 85.0	68.0/29.0/ 3.0	68.0/3.5/ 28.5	26.0/26.0/ 20.0/21.0/ 7.0	24.3/24.7/ 25.3/25.7	25.2/24.3/ 23.2/27.3
Allowable Composition	% by weight	N/A	30.0-32.0/ 30.0-32.0/ 29.0-31.0/ 2.5-3.5/ 4.0-6.0	11.0-13.0/ 4.0-6.0/ 81.0-85.0	40.5-42.5/ 9.0-11.0/ 47.5-49.5	5.0-7.0/ 8.0-10.0/ 83.0-87.0	67.0-68.5/ 28.4-31.0/ 2.0-3.1	67.5-69.5/ 3.0-5.0/ 27.5-29.5	24.0-26.5/ 25.5-28.0/ 18.0-20.5/ 20.0-23.0/ 5.0-7.5	23.3-24.5/ 24.5-25.7/ 24.3-25.5/ 25.5-26.7	23.7-25.5/ 24.0-25.8/ 21.7-23.5/ 27.0-28.8
Bubble Point ¹	°C @ 101.3 kPa	N/A	-46.5	-34.3	-44.6	-50.3	-49.4	-49.3	-45.9	-46	-46.1
Dew Point ¹	°C @ 101.3 kPa	N/A	-39.9	-24.3	-34.9	-23.5	-42.1	-44.2	-39.8	-39.9	-40.2
Critical Temperature ¹	°C	N/A	82.4	103.2	91.5	98	84.2	82.6	81.6	81.5	84.2
VAPOR PHASE CONTAMINANTS:											
Air and Other Non-condensables, Max.	% by volume @ 25.0 °C	5.10	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
LIQUID PHASE CONTAMINANTS:											
Water, Maximum	ppm by weight	5.4	10	10	10	10	10	10	10	10	10
All Other Volatile Impurities, Max.	% by weight	5.11	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
High Boiling Residue, Max.	% by volume or % by weight	5.8	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Particulates/Solids	Pass or Fail	5.9	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean
Acidity, Max.	ppm by weight (as HCl)	5.7	1	1	1	1	N/A	1	1	1	1
Chloride ²	Pass or Fail	5.6	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity
1. Bubble points, dew points, and critical temperatures, although not required, are provided for informational purposes. Refrigerant data compiled from Refprop 9.1.											
2. Recognized chloride level for pass/fail is about 3 ppm.											

Table 2A. Zeotropic Blends (400 Series Refrigerants) and their Allowable Levels of Contaminants (continued)										
CHARACTERISTICS:										
	Reporting Units	Reference Section	R-450A	R-451A	R-451B	R-452A	R-453A	R-454A	R-454B	R-455A
Refrigerant Components	N/A	N/A	R-134a/ 1234ze(E)	R-1234yf/ 134a	R-1234yf/ 134a	R-32/125/ 1234yf	R-32/125/ 134a/227e/600/601a	R-32/ 1234yf	R-32/ 1234yf	R-744/32/ 1234yf
Nominal Composition	% by weight	N/A	42.0/58.0	89.8/10.2	88.8/11.2	11.0/59.0/ 30.0	20.0/20.0/53.8/ 5.0/0.6/0.6	35.0/65.0	68.9/31.1	3.0/21.5/ 75.5
Allowable Composition	% by weight	N/A	40.0-44.0/ 56.0-60.0	89.6-90.0/ 10.0-10.4	88.6-89.0/ 11.0-11.4	9.3-12.7/ 57.2-60.8/ 29.0-30.1	19.0-21.0/19.0-21.0/ 52.8-54.8/4.5-5.5/ 0.4-0.7/0.4-0.7	33.0-37.0/ 63.0-67.0	67.9-69.9/ 30.1-32.1	2.0-5.0/ 19.5-22.5/ 73.5-77.5
Bubble Point ¹	°C @ 101.3 kPa	N/A	-23.4	-30.8	-31	-47.0	-42.2	-48.4	-50.9	-51.6
Dew Point ¹	°C @ 101.3 kPa	N/A	-22.8	-30.5	-30.6	-43.2	-35	-41.6	-50.0	-39.1
Critical Temperature ¹	°C	N/A	104.4	95.4	95.5	74.9	88	86.2	76.5	82.8
VAPOR PHASE CONTAMINANTS:										
Air and Other Non-condensables, Max.	% by volume @ 25.0 °C	5.10	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
LIQUID PHASE CONTAMINANTS:										
Water, Maximum	ppm by weight	5.4	10	10	10	10	10	10	10	10
All Other Volatile Impurities, Max.	% by weight	5.11	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
High Boiling Residue, Max.	% by volume or % by weight	5.8	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Particulates/Solids	Pass or Fail	5.9	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean
Acidity, Max.	ppm by weight (as HCl)	5.7	1	1	1	1	N/A	1	1	1
Chloride ²	Pass or Fail	5.6	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity

1. Bubble points, dew points, and critical temperatures, although not required, are provided for informational purposes. Refrigerant data compiled from Refprop 9.1.

2. Recognized chloride level for pass/fail is about 3 ppm.

1. Bubble points, dew points, and critical temperatures, although not required, are provided for informational purposes. Refrigerant data compiled from Refprop 9.1.

2. Recognized chloride level for pass/fail is about 3 ppm.

Table 2B. Hydrocarbon Blends (400 & 500 Series Refrigerants) and their Allowable Levels of Contaminants										
	Reporting Units	Reference Section	R-432A	R-433A	R-433B	R-433C	R-436A	R-436B	R-441A	R-443A
CHARACTERISTICS:										
Refrigerant Components	N/A	N/A	R-1279/E170	R-1270/290	R-1270/290	R-1270/290	R-290/600a	R-290/600a	R-170/290/600a/600	R-1270/290/600a
Nominal Composition	% by weight	N/A	80.0/20.0	30.0/70.0	5.0/95.0	25.0/75.0	56.0/44.0	52.0/48.0	3.1/54.8/6.0/36.1	55.0/40.0/5.0
Allowable Composition	% by weight	N/A	79.0-81.0/ 19.0-21.0	29.0-31.0/ 69.0-71.0	4.0-6.0/ 94.0-96.0	24.0-26.0/ 74.0-76.0	55.0-57.0/ 43.0-45.0	51.0-53.0/ 47.0-49.0	2.8-2.4/52.8-56.8/ 5.4-6.6/34.1-38.1	53.0-57.0/ 38.0-42.0/ 3.8-6.2
Bubble Point ¹	°C @ 101.3 kPa	N/A	-45.2	-44.4	-42.5	-44.1	-34.3	-33.3	-41.5	-45.2
Dew Point ¹	°C @ 101.3 kPa	N/A	-42.4	-44	-42.4	-43.7	-26.1	-25	-20.3	-42.1
Critical Temperature ¹	°C	N/A	97.3	94.4	96.3	94.8	115.9	117.4	117.3	95.1
VAPOR PHASE CONTAMINANTS ² :										
Air and Other Non-condensables, Max.	% by volume @ 25.0°C	5.10	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
LIQUID PHASE CONTAMINANTS ³ :										
Sulfur Odor ⁴	No odor to pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass
High Boiling Residue, Max.	% by volume or % by weight	5.8	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Particulates/Solids	Pass or Fail	5.9	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean
Acidity, Max.	ppm by weight	5.7	1	1	1	1	1	1	1	N/A
Water, Max.	ppm by weight	5.4	20	10	10	10	10	10	10	10
All Other Volatile Impurities, Max.	% by weight	5.11	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Total C3, C4 and C5 Polyolefins, Max.	% by weight	5.12	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
Chloride ²	Pass or Fail	5.6	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	N/A	N/A
1. Bubble points, dew points, and critical temperatures, although not required, are provided for informational purposes. Refrigerant data compiled from Refprop 9.1.										
2. Taken from vapor phase										
3. Vaporized from liquid phase										
4. Including hydrogen sulphide and mercaptans										

1. Bubble points, dew points, and critical temperatures, although not required, are provided for informational purposes. Refrigerant data compiled from Refprop 9.1.

2. Taken from vapor phase

3. Vaporized from liquid phase

4. Including hydrogen sulphide and mercaptans

Table 3. Azeotropic Blends (500 Series Refrigerants) and their Allowable Levels of Contaminants													
	Reporting Units	Reference Section	R-500	R-502	R-503	R-507A	R-508A	R-508B	R-509A	R-510A	R-511A	R-512A	R-513A
CHARACTERISTICS:													
Refrigerant Components	N/A	N/A	R-12/152a	R-22/115	R-23/13	R-125/143a	R-23/116	R-23/116	R-22/218	R-E170/600a	R-290/E170	R-134a/152a	R-1234yf/134a
Nominal Composition	% by weight	N/A	73.8/26.2	48.8/51.2	40.1/59.9	50.0/50.0	39.0/61.0	46.0/54.0	44.0/56.0	88.0/12.0	95.0/5.0	5.0/95.0	56.0/44.0
Allowable Composition	% by weight	N/A	72.8-74.8/ 25.2-27.2	44.8-52.8/ 47.2-55.2	39.0-41.0/ 59.0-61.0	49.5-51.5/ 48.5-50.5	37.0-41.0/ 59.0-63.0	44.0-48.0/ 52.0-56.0	42.0-46.0/ 56.0-60.0	87.5-88.5/ 11.5-12.5	94.0-96.0/ 4.0-6.0	4.0-6.0/ 94.0-96.0	55.0-57.0/ 43.0-45.0
Bubble Point ¹	°C @ 101.3 kPa	N/A	-33.6	-45.2	-87.8	-46.7	-87.4	-87	-49.8	-24.9	-42	-24	-29.2
Dew Point ¹	°C @ 101.3 kPa	N/A	-33.6	-45	-87.8	-46.7	-87.4	-87	-48.1	-24.9	-42	-24	-29.1
Critical Temperature ¹	°C	N/A	102.1	80.2	18.4	70.6	10.8	11.8	68.6	125.7	97	112.9	96.5
VAPOR PHASE CONTAMINANTS:													
Air and Other Non-condensables, Max.	% by volume @ 25 °C	5.10	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
LIQUID PHASE CONTAMINANTS:													
Water, Maximum	ppm by weight	5.4	10	10	10	10	10	10	10	20	20	10	10
All Other Volatile Impurities, Max.	% by weight	5.11	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
High Boiling Residue, Max.	% by volume or % by weight	5.8	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Particulates/Solids	Pass or Fail	5.9	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean	Visually clean
Acidity, Max.	ppm by weight	5.7	1	1	1	1	1	1	1	1	1	1	1
Chloride ²	Pass or Fail	5.6	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity	No visible turbidity
1. Bubble points, dew points, and critical temperatures, although not required, are provided for informational purposes. Refrigerant data compiled from Refprop 9.1.													
2. Recognized chloride level for pass/fail is about 3 ppm.													

SECTION 7.0 REFERENCES—NORMATIVE

Listed here are all standards, handbooks, and other publications essential to the formation and implementation of the standard.

All references in this appendix are considered as part of this standard.

ANSI/ASHRAE Standard 34-2013, *Designation and Safety Classification of Refrigerants*,

with Addenda, American National Standards Institute/American Society of Heating, Refrigerating, and Air-Conditioning Engineers.

2008 Appendix C to AHRI Standard 700–2014, *2008 Appendix C for Analytical Procedures for AHRI Standard 700–2014—Normative*, copyright 2008 (incorporated by reference, see §82.168).

ASTM D1296–01 (Reapproved 2012), *Standard Test Method for Odor of Volatile Solvents and Diluents*, approved July 1, 2012, (incorporated by reference, see §82.168).

BB–F–1421B, Federal Specification for “Fluorocarbon Refrigerants,” dated March 5, 1982, (incorporated by reference, see §82.168).

GPA Standard 2177–13, *Analysis of Natural Gas Liquid Mixtures Containing Nitrogen and Carbon Dioxide by Gas Chromatography, Revised*, copyright 2013, (incorporated by reference, see §82.168).

REFPROP Reference Fluid Thermodynamic and Transport Properties *NIST Standard Reference Database 23 version 9.1*, 2013, U.S. Department of Commerce, Technology Administration, National Institute of Standards and Technology.

SECTION 8.0 REFERENCES—INFORMATIVE

Listed here are standards, handbooks, and other publications which may provide useful information and background but are not considered essential.

2012 Appendix D to AHRI Standard 700–2014, *2012 Appendix D for Gas Chromatograms for AHRI Standard 700–2014—Informative*, copyright 2012, (incorporated by reference, see §82.168).

[81 FR 82365, Nov. 18, 2016]

APPENDIX A1 TO SUBPART F OF PART 82—GENERIC MAXIMUM CONTAMINANT LEVELS

Contaminant	Reporting units
Air and Other Non-condensables.	1.5% by volume @ 25 °C (N/A for refrigerants used in low-pressure appliances ¹).
Water	10 ppm by weight 20 ppm by weight (for refrigerants used in low-pressure appliances ¹).
Other Impurities Including Refrigerant.	0.50% by weight.
High boiling residue	0.01% by volume.
Particulates/solids	visually clean to pass.
Acidity	1.0 ppm by weight.
Chlorides (chloride level for pass/fail is 3ppm).	No visible turbidity.

¹ Low-pressure appliances means an appliance that uses a refrigerant with a liquid phase saturation pressure below 45 psia at 104 °F.

BLEND COMPOSITIONS (WHERE APPLICABLE)

Nominal composition (by weight%)	Allowable composition (by weight%)
Component constitutes 25% or more	±2.0
Component constitutes less than 25% but greater than 10%	±1.0
Component constitutes less than or equal to 10%	±0.5

[69 FR 11988, Mar. 12, 2004]

APPENDIX B1 TO SUBPART F OF PART 82—PERFORMANCE OF REFRIGERANT RECOVERY, RECYCLING AND/OR RECLAIM EQUIPMENT

This appendix is based on the Air-Conditioning and Refrigeration Institute Standard 740–1993.

REFRIGERANT RECOVERY/RECYCLING EQUIPMENT

Section 1. Purpose

1.1 *Purpose.* The purpose of this standard is to establish methods of testing for rating and evaluating the performance of refrigerant recovery, and/or recycling equipment, and general equipment requirements (herein referred to as “equipment”) for containment or purity levels, capacity, speed, and purge loss to minimize emission into the atmosphere of designated refrigerants.

1.1.1 This standard is intended for the guidance of the industry, including manufacturers, refrigerant reclaimers, repackers, distributors, installers, servicemen, contractors and for consumers.

1.1.2 This standard is not intended to be used as a guide in defining maximum levels of contaminants in recycled or reclaimed refrigerants used in various applications.

1.2 *Review and Amendment.* This standard is subject to review and amendment as the technology advances.

Section 2. Scope

2.1 *Scope.* This standard defines general equipment requirements and the test apparatus, test mixtures, sampling and analysis techniques that will be used to determine the performance of recovery and/or recycling equipment for various refrigerants including R11, R12, R13, R22, R113, R114, R123, R134a, R500, R502, and R503, as referenced in the ANSI/ASHRAE Standard 34–1992, “Number Designation of Refrigerants” (American Society of Heating, Refrigerating, and Air Conditioning Engineers, Inc.).

Environmental Protection Agency

Pt. 82, Subpt. F, App. B1

Section 3. Definitions

3.1 *Recovered refrigerant.* Refrigerant that has been removed from a system for the purpose of storage, recycling, reclamation or transportation.

3.2 *Recover.* Reference 40 CFR 82.152.

3.3 *Recycle.* Reference 40 CFR 82.152.

3.4 *Reclaim.* Reference 40 CFR 82.152.

3.5 *Standard Contaminated Refrigerant Sample.* A mixture of new and/or reclaimed refrigerant and specified quantities of identified contaminants which are representative of field obtained, used refrigerant samples and which constitute the mixture to be processed by the equipment under test.

3.6 *Push/Pull Method.* The push/pull refrigerant recovery method is defined as the process of transferring liquid refrigerant from a refrigeration system to a receiving vessel by lowering the pressure in the vessel and raising the pressure in the system, and by connecting a separate line between the system liquid port and the receiving vessel.

3.7 *Recycle Rate.* The amount of refrigerant processed (in pounds) divided by the time elapsed in the recycling mode in pounds per minute. For equipment which uses a separate recycling sequence, the recycle rate does not include the recovery rate (or elapsed time). For equipment which does not use a separate recycling sequence, the recycle rate is a maximum rate based solely on the higher of the liquid or vapor recovery rate, by which the rated contaminant levels can be achieved.

3.8 *Equipment Classification.*

3.8.1 *Self Contained Equipment.* A refrigerant recovery or recycling system which is capable of refrigerant extraction without the assistance of components contained within an air conditioning or refrigeration system.

3.8.2 *System Dependent Equipment.* Refrigerant recovery equipment which requires for its operation the assistance of components contained in an air conditioning or refrigeration system.

3.9 “*Shall*”, “*Should*”, “*Recommended*” or “*It is Recommended*”, “*Shall*” “*Should*”, “*recommended*”, or “*it is recommended*” shall be interpreted as follows:

3.9.1 *Shall.* Where “shall” or “shall not” is used for a provision specified, that provision

is mandatory if compliance with the standard is claimed.

3.9.2 *Should, Recommended, or It is Recommended.* “Should”, “recommended”, is used to indicate provisions which are not mandatory but which are desirable as good practice.

Section 4. General Equipment Requirements

4.1 The equipment manufacturer shall provide operating instructions, necessary maintenance procedures, and source information for replacement parts and repair.

4.2 The equipment shall indicate when any filter/drier(s) needs replacement. This requirement can be met by use of a moisture transducer and indicator light, by use of a sight glass/moisture indicator, or by some measurement of the amount of refrigerant processed such as a flow meter or hour meter. Written instructions such as “to change the filter every 400 pounds, or every 30 days” shall not be acceptable except for equipment in large systems where the Liquid Recovery Rate is greater than 25 lbs/min [11.3 Kg/min] where the filter/drier(s) would be changed for every job.

4.3 The equipment shall either automatically purge non-condensables if the rated level is exceeded or alert the operator that the non-condensable level has been exceeded. While air purge processes are subject to the requirements of this section, there is no specific requirement to include an air purge process for “recycle” equipment.

4.4 The equipment’s refrigerant loss due to non-condensable purging shall not be exceeded 5% by weight of total recovered refrigerant. (See Section 9.4)

4.5 Internal hose assemblies shall not exceed a permeation rate of 12 pounds mass per square foot [5.8 g/cm²] of internal surface per year at a temperature of 120 F [48.8 °C] for any designated refrigerant.

4.6 The equipment shall be evaluated at 75 F [24 °C] per 7.1. Normal operating conditions range from 50 °F to 104 F [10 °C to 40 °C].

4.7 *Exemptions:*

4.7.1 Equipment intended for recovery only shall be exempt from sections 4.2 and 4.3.

TABLE 1—STANDARD CONTAMINATED REFRIGERANT SAMPLES

	R11	R12	R13	R22	R113	R114	R123	R134a	R500	R502	R503
Moisture content: PPM by weight of pure re- frigerant	100	80	30	200	100	85	100	200	200	200	30
Particulate content: PPM by weight of pure re- frigerant character- ized by ¹	80	80	80	80	80	80	80	80	80	80	80

TABLE 1—STANDARD CONTAMINATED REFRIGERANT SAMPLES—Continued

	R11	R12	R13	R22	R113	R114	R123	R134a	R500	R502	R503
Acid content: PPM by weight of pure re- frigerant— (mg KOH per kg refrig.) char- acterized by ²	500	100	NA	500	400	200	500	100	100	100	NA
Mineral oil content: % by weight of pure refig- erant	20	5	NA	5	20	20	20	5	5	5	NA
Viscosity (SUS)	300	150		300	300	300	300	150	150	150	
Non conden- sable gases air content % volume ³ ≤	NA	3	3	3	NA	3	3	3	3	3	3

¹ Particulate content shall consist of inert materials and shall comply with particulate requirements in ASHRAE Standard 63.2, "Method of Testing of Filtration Capacity of Refrigerant Liquid Line Filters and Filter Driers."

² Acid consists of 60% oleic acid and 40% hydrochloric acid on a total number basis.

³ Synthetic ester based oil.

Section 5. Contaminated Refrigerants

5.1 The standard contaminated refrigerant sample shall have the characteristics specified in Table 1, except as provided in 5.2

5.2 Recovery equipment not rated for any specific contaminant can be tested with new or reclaimed refrigerant.

Section 6. Test Apparatus

6.1 Self Contained Equipment Test Apparatus. The apparatus as shown in Figure 1 consists of a 3 cubic foot [0.085 m³] mixing chamber with a conical-shaped bottom, although a larger mixing chamber is permissible. The size of the mixing chamber depends upon the size of the equipment. The outlet at the bottom of the cone and all restrictions and valves for liquid and vapor refrigerant lines in the test apparatus shall be a minimum of 0.375 in. [9.5 mm] inside diameter or equivalent. The minimum inside diameter for large equipment for use on chillers shall be 1.5 in. [38 mm.]. The mixing chamber shall contain various ports for receiving liquid refrigerant, oil, and contaminants. A recirculating line connected from the bottom outlet through a recirculating pump and then to a top vapor port shall be provided for stirring of the mixture. Isolation valves may be required for the pump. Alternative stirring means may be used if demonstrated to be equally effective.

6.1.1 For liquid refrigerant feed, the liquid valve is opened. For vapor refrigerant feed,

the vapor valve is opened and refrigerant passes through an evaporator coil. Flow is controlled by a thermostatic expansion valve to create 5 F [3 °C] superheat at an evaporator temperature of 70 F ±3 F [21 °C±2°]. The evaporator coil or equivalent evaporator means shall be either sized large enough for the largest system or be sized for each system.

6.1.2 An alternative method for vapor refrigerant feed is to pass through a boiler and then an automatic pressure regulating valve set at refrigerant saturation pressure at 75 F ±3 F [24 °C ±2 °C].

6.2 System Dependent Equipment Test Apparatus. This test apparatus is to be used for final recovery vacuum rating of all system dependent equipment.

6.2.1 The test apparatus shown in Figure 2 consists of a complete refrigeration system. The manufacturer shall identify the refrigerants to be tested. The test apparatus can be modified to facilitate operation or testing of the system dependent equipment if the modifications to the apparatus are specifically described within the manufacturer's literature. (See Figure 2.) A ¼ inch [6.3 mm] balance line shall be connected across the test apparatus between the high and low pressure sides, with an isolation valve located at the connection to the compressor high side. A ¼ inch [6.3 mm] access port with a valve core shall be located in the balance line for the purpose of measuring final recovery vacuum at the conclusion of the test.

FIGURE 1

Test Apparatus for Self-Contained Equipment


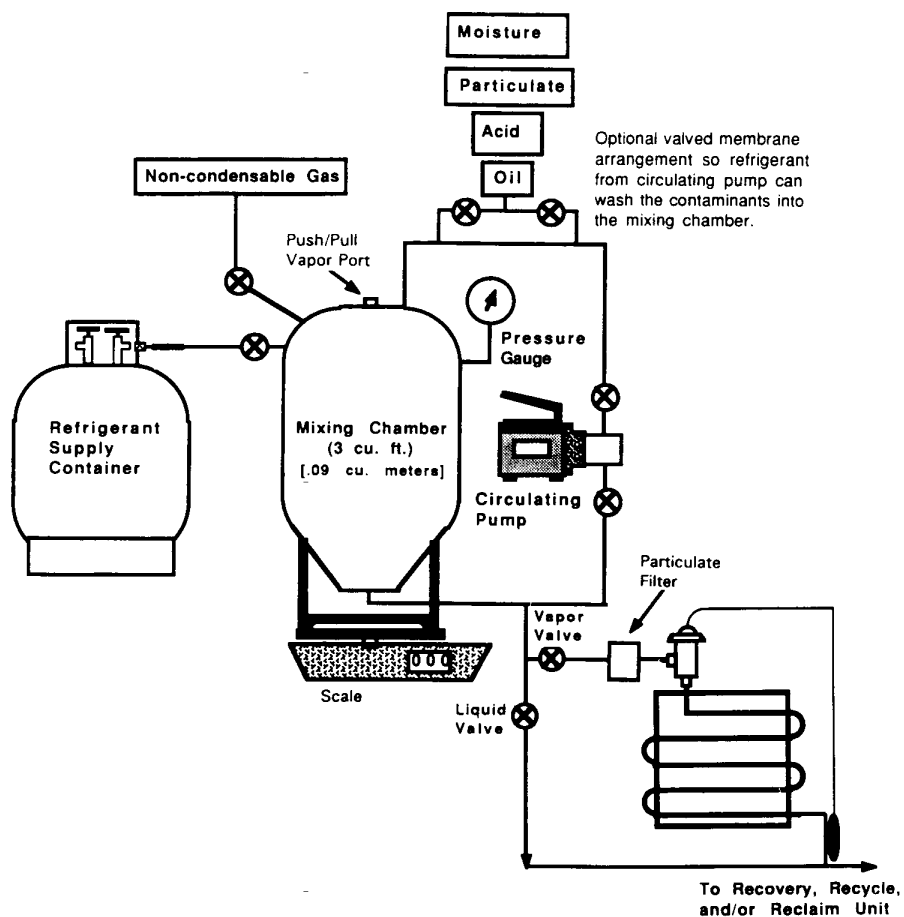


FIGURE 2

System-Dependent Equipment Test Apparatus

Configuration of a standard air conditioning or refrigeration system for use as a test apparatus

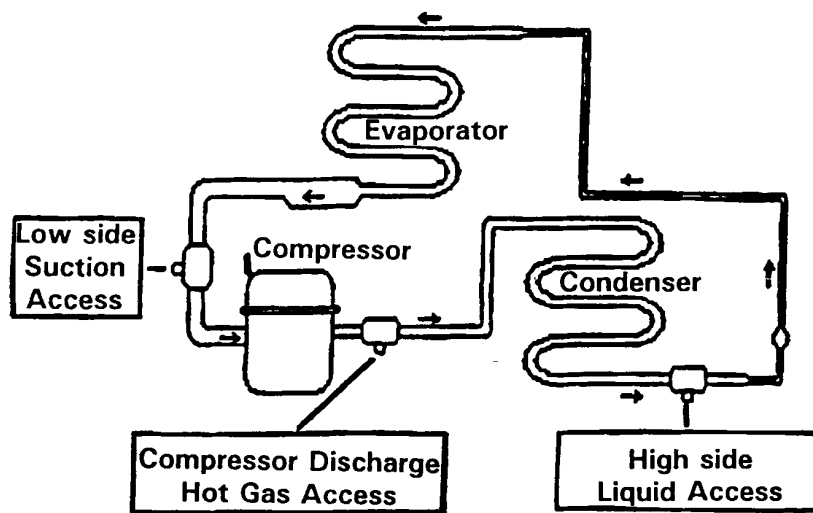

Section 7. Performance Testing

7.1 Contaminant removal and performance testing shall be conducted at 75 F $\pm$ 2 F [23.9 °C $\pm$ 1.1 °C].

7.1.1 The equipment shall be prepared for operation per the instruction manual.

7.1.2 The contaminated sample batch shall consist of not less than the sum of the amounts required to complete steps 7.1.2.2 and 7.1.2.3 below.

7.1.2.1 A liquid sample shall be drawn from the mixing chamber prior to starting the test to assure quality control of the mixing process.

7.1.2.2 Vapor refrigerant feed testing, if elected, shall normally be processed first. After the equipment reaches stabilized conditions of condensing temperature and/or storage tank pressure, the vapor feed recovery rate shall be measured. One method is to start measuring the vapor refrigerant recovery rate when 85% of refrigerant remains in the mixing chamber and continue for a period of time sufficient to achieve the accuracy in 9.2. If liquid feed is not elected, complete Step 7.1.2.4.

7.1.2.3 Liquid refrigerant feed testing, if elected, shall be processed next. After the equipment reaches stabilized conditions, the liquid feed recovery rate shall be measured. One method is to wait 2 minutes after starting liquid feed and then measure the liquid refrigerant recovery rate for a period of time sufficient to achieve the accuracy in 9.1. Continue liquid recovery operation as called for in 7.1.2.4.

7.1.2.4 Continue recovery operation until all liquid is removed from the mixing chamber and vapor is removed to the point where the equipment shuts down per automatic means or is manually stopped per the operating instructions.

7.1.2.5 After collecting the first contaminated refrigerant sample batch, the liquid and vapor value of the apparatus shall be closed and the mixing chamber pressure recorded after 1 minute as required in 9.5. After preparing a second contaminated refrigerant sample batch, continue recovery until the storage container reaches 80% liquid fill level. After recycling and measuring

the recycle rate per section 7.1.3, set this container aside for the vapor sample in 8.2.2.

7.1.2.6 Interruptions in equipment operations as called for in instruction manual are allowable.

7.1.3 Recycle as called for in equipment operating instructions. Determine recycle rate by appropriate means as required in 9.3.

7.1.4 Repeat steps 7.1.2, 7.1.2.4, and 7.1.3 with contaminated refrigerant sample until equipment indicator(s) show need to change filter(s). It will not be necessary to repeat the recycle rate determination in 7.1.3.

7.1.4.1 For equipment with a multiple pass recirculating filter system, analyze the contents of the previous storage container.

7.1.4.2 For equipment with a single pass filter system, analyze the contents of the current storage container.

7.1.5 Refrigerant loss due to the equipment's non-condensable gas purge shall be determined by appropriate means. (See Section 9.4.)

7.2 System Dependent Equipment. This procedure shall be used for vacuum rating of all system dependent equipment. Liquid refrigerant recovery rate, vapor refrigerant recovery rate, and recycle rate are not tested on system dependent systems.

7.2.1 The apparatus operation and testing shall be conducted at 75 F $\pm$ 2 F. [23.9 °C. $\pm$ 1.1. °C.].

7.2.2 The apparatus shall be charged with refrigerant per its system design specifications.

7.2.3 For measurement of final recovery vacuum as required in 9.5, first shut the balance line isolation valve and wait 1 minute for pressure to balance. Then connect and operate the recovery system per manufacturers recommendations. When the evacuation is completed, open the balance line isolation valve and measure the pressure in the balance line.

Section 8. Sampling and Chemical Analysis Methods

8.1 The referee test methods for the various contaminants are summarized in the following paragraphs. Detailed test procedures are included in Appendix A "Test Procedures for ARI STD 700." If alternate test methods are employed, the user must be able to demonstrate that they produce results equivalent to the specified referee method.

8.2 Refrigerant Sampling.

8.2.1 *Sampling Precautions.* Special precautions should be taken to assure that representative samples are obtained for analysis. Sampling shall be done by trained laboratory personnel following accepted sampling and safety procedures.

8.2.2 *Gas Phase Sample.* A gas phase sample shall be obtained for determining the non-condensables. Since non-condensable gases, if present, will concentrate in the vapor phase of the refrigerant, care must be exer-

cised to eliminate introduction of air during the sample transfer. Purging is not an acceptable procedure for a gas phase sample since it may introduce a foreign product. Since R11, R113 and R123 have normal boiling points at or above room temperature, non-condensable determination is not required for these refrigerants.

8.2.2.1 The sample cylinder shall be connected to an evacuated gas sampling bulb by means of a manifold. The manifold should have a valve arrangement that facilitates evacuation of all connecting tubing leading to the sampling bulb.

8.2.2.2 After the manifold has been evacuated, close the valve to the pump and open the valve on the system. Allow the pressure to equilibrate and close valves.

8.2.3 *Liquid Phase Sample.* A liquid phase sample is required for all tests listed in this standard, except the test for non-condensables.

8.2.3.1 Place an empty sample cylinder with the valve open in an oven at 230 F [110 °C] for one hour. Remove it from the oven while hot, immediately connect to an evacuation system and evacuate to less than 1mm. mercury (1000 microns). Close the valve and allow it to cool.

8.2.3.2 The valve and lines from the unit to be sampled shall be clean and dry. Connect the line to the sample cylinder loosely. Purge through the loose connection. Make the connection tight at the end of the purge period. Take the sample as a liquid by chilling the sample cylinder slightly. Accurate analysis requires that the sample container be filled to at least 60% by volume; however under no circumstances should the cylinder be filled to more than 80% by volume. This can be accomplished by weighing the empty cylinder and then the cylinder with refrigerant. When the desired amount of refrigerant has been collected, close the valve(s) and disconnect the sample cylinder immediately.

8.2.3.3 Check the sample cylinder for leaks and record the gross weight.

8.3 Water Content.

8.3.1. The Coulometric Karl Fischer Titration shall be the primary test method for determining the water content of refrigerants. This method is described in Appendix A. This method can be used for refrigerants that are either a liquid or a gas at room temperature, including Refrigerants 11 and 13. For all refrigerants, the sample for water analysis shall be taken from the liquid phase of the container to be tested. Proper operation of the analytical method requires special equipment and an experienced operator. The precision of the results is excellent if proper sampling and handling procedures are followed. Refrigerants containing a colored dye can be successfully analyzed for water using this method.

8.3.2 The Karl Fischer Test Method is an acceptable alternative test method for determining the water content of refrigerants. This method is described in ASTM Standard for "Water in gases Using Karl Fisher Reagent" E700-79, reapproved 1984 (American Society for Testing and Materials, Philadelphia, PA).

8.3.3 Report the moisture level in parts per million by weight if a sample is required.

8.4 *Chloride*. The refrigerant shall be tested for chlorides as an indication of the presence of hydrochloric or similar acids. The recommended procedure is intended for use with new or reclaimed refrigerants. Significant amounts of oil may interfere with the results by indicating a failure in the absence of chlorides.

8.4.1 The test method shall be that described in Appendix A "Test Procedures for ARI-700." The test will show noticeable turbidity at equivalent chloride levels of about 3 ppm by weight or higher.

8.4.2 The results of the test shall not exhibit any sign of turbidity. Report results as "pass" or "fail."

8.5 *Acidity*.

8.5.1 The acidity test uses the titration principle to detect any compound that is highly soluble in water and ionizes as an acid. The test method shall be that described in Appendix A. "Test Procedures for ARI-700." The test may not be suitable for determination of high molecular weight organic acids; however these acids will be found in the high boiling residue test outlined in Section 5.7. The test requires about a 100 to 120 gram sample and has a low detection limit of 0.1 ppm by weight as HCl.

8.6 *High Boiling Residue*.

8.6.1 High boiling residue will be determined by measuring the residue of a standard volume of refrigerant after evaporation. The refrigerant sample shall be evaporated at room temperature or a temperature 50 F [10°C], above the boiling point of the sample using a Goetz tube as specified in Appendix A "Test Procedures for ARI-700." Oils and or organic acids will be captured by this method.

8.6.2 The value for high boiling residue shall be expressed as a percentage by volume.

8.7 *Particulates/Solids*.

8.7.1 A measured amount of sample is evaporated from a Goetz bulb under controlled temperature conditions. The particulates/solids shall be determined by visual examination of the empty Goetz bulb after the sample has evaporated completely. Presence of dirt, rust or other particulate contamination is reported a "fail." For details of this test method, refer to Appendix B "Test Procedures for ARI-700."

8.8 *Non-Condensables*

8.8.1 A vapor phase sample shall be used for determination of non-condensables. Non-

condensable gases consist primarily of air accumulated in the vapor phase of refrigerant containing tanks. The solubility of air in the refrigerants liquid phase is extremely low and air is not significant as a liquid phase contaminant. The presence of non-condensable gases may reflect poor quality control in transferring refrigerants to storage tanks and cylinders.

8.8.2 The test method shall be gas chromatography with a thermal conductivity detector as described in Appendix A "Test Procedures for ARI-700."

8.8.2.1 The Federal Specification for "Fluorocarbon Refrigerants," BB-F-1421B, dated March 5, 1992, section 4.4.2 (perchloroethylene method) is an acceptable alternate test method.

8.8.3 Report the level of non-condensable as percent by volume.

Section 9. Performance Calculation and Rating

9.1 The liquid refrigerant recovery rate shall be expressed in pounds per minute [kg/min] and measured by weight change at the mixing chamber (See Figure 1) divided by elapsed time to an accuracy within .02 lbs/min. [.009 kg/min]. Ratings using the Push/Pull method shall be identified "Push/Pull". Equipment may be rated by both methods.

9.2 The vapor refrigerant recovery rate shall be expressed in pounds per minute [kg/min] and measured by weight change at the mixing chamber (See Figure 1) divided by elapsed time to an accuracy within .02 lbs/min. [.009 kg/min].

9.3 The recycle rate is defined in 3.7 and expressed in pounds per minute [kg/min] of flow and shall be per ASHRAE 41.7-84 "Procedure For Fluid Measurement Of Gases" or ASHRAE 41.8-89 "Standard Method of Flow of Fluids—Liquids."

9.3.1 For equipment using multipass recycling or a separate sequence, the recycle rate shall be determined by dividing the net weight W of the refrigerant to be recycled by the actual time T required to recycle the refrigerant. Any set-up or operator interruptions shall not be included in the time T. The accuracy of the recycle rate shall be within .02 lbs/min. [.009 kg/min].

9.3.2 If no separate recycling sequence is used, the recycle rate shall be the higher of the vapor refrigerant recovery rate or the liquid refrigerant recovery rate. The recycle rate shall match a process which leads to contaminant levels in 9.6. Specifically, a recovery rate determined from bypassing a contaminant removal device cannot be used as a recycle rate when the contaminant levels in 9.6 are determined by passing the refrigerant through the containment removal device.

9.4 Refrigerant loss due to non-condensable purging shall be less than 5%. This rating shall be expressed as "passed" if less than 5%.

Environmental Protection Agency

Pt. 82, Subpt. F, App. B1

This calculation will be based upon net loss of non-condensables and refrigerant due to the purge divided by the initial net content. The net loss shall be determined by weighing before and after the purge, by collecting purged gases, or an equivalent method.

9.5 The final recovery vacuum shall be the mixing chamber pressure called for in 7.1.2.5 expressed in inches of mercury vacuum, [mm Hg or kPa]. The accuracy of the measurement shall be within ± 1 inch [± 25 mm] of Hg and rounding down to the nearest whole number.

9.6 The contaminant levels remaining after testing shall be published as follows:

Moisture content, PPM by weight
Chloride ions, Pass/Fail
Acidity, PPM by weight

High boiling residue, percentage by volume
Particulate/solid, Pass/Fail

Non-condensables, % by volume

9.7 Product Literature: Except as provided under product labelling in Section 11, performance ratings per 9.1, 9.2, 9.3, and 9.5 must be grouped together and shown for all listed refrigerants (11.2) subject to limitations of 9.8. Wherever any contaminant levels per 9.6 are rated, all ratings in 9.6 must be shown for all listed refrigerants subject to limitations of 9.8. The type of equipment in 11.1 must be included with either grouping. Optional ratings in 9.8 need not be shown.

9.8 Ratings shall include all of the parameters for each designed refrigerant in 11.2 as shown in Tables 2 and 3.

TABLE 2—PERFORMANCE

Parameter/type of equipment	Recovery	Recovery/ recycle	Recycle	System dependent equipment
Liquid refrigerant recovery rate	(2)	(2)	N/A	N/A
Vapor refrigerant recovery rate	(2)	(2)	N/A	N/A
Final recovery vacuum	(1)	(1)	N/A	(1)
Recycle rate	N/A	(1)	(1)	N/A
Refrigerant loss due to non-condensable purging	(3)	(1)	(1)	N/A

¹ Mandatory rating.

² For a recovery or recovery/recycle unit, one must rate for either liquid feed only or vapor feed only or can rate for both. If rating only the one, the other shall be indicated by "N/A."

³ For Recovery Equipment, these parameters are optional. If not rated, use N/A.

TABLE 3—CONTAMINANTS

Contaminant/type of equipment	Recovery	Recovery/ recycle	Recycle	System dependent equipment
Moisture content	(*)	x	x	NA.
Chloride ions	(*)	x	x	NA.
Acidity	(*)	x	x	NA.
High boiling residue	(*)	x	x	NA.
Particulates	(*)	x	x	NA.
Non-condensables	(*)	x	x	NA.

*For Recovery Equipment, these parameters are optional. If not rated, use N/A.

xMandatory rating.

Section 10. Tolerances

10.1 Any equipment tested shall produce contaminant levels not higher than the published ratings. The liquid refrigerant recovery rate, vapor refrigerant recovery rate, final recovery vacuum and recycle rate shall not be less than the published ratings.

Section 11. Product Labelling

11.1 *Type of equipment.* The type of equipment shall be as listed:

- 11.1.1 Recovery only
- 11.1.2 System Dependent Recovery
- 11.1.3 Recovery/Recycle
- 11.1.4 Recycle only

11.2 Designated refrigerants and the following as applicable for each:

- 11.2.1 Liquid Recovery Rate
- 11.2.2 Vapor Recovery Rate
- 11.2.3 Final Recovery Vacuum
- 11.2.4 Recycle Rate

11.3 The nameplate shall also conform to the labeling requirements established for certified recycling and recovery equipment established at 40 CFR 82.158(h).

ATTACHMENT TO APPENDIX B1

Particulate Used in Standard Contaminated Refrigerant Sample.

1. Particulate Specification

1.1 The particulate material pm will be a blend of 50% coarse air cleaner dust as received, and 50% retained on a 200-mesh screen. The coarse air cleaner dust is available from: AC Spark Plug Division, General Motors Corporation, Flint, Michigan.

1.2 Preparation of Particulate Materials

To prepare the blend of contaminant, first wet screen a quantity of coarse air cleaner dust on a 200-mesh screen (particle retention 74 µm). This is done by placing a portion of the dust on a 200-mesh screen and running water through the screen while stirring the dust with the fingers. The fine contaminant particles passing through the screen are discarded. The +200 mesh particles collected on the screen are removed and dried for one hour at 230 F [110 °C]. The blend of standard contaminant is prepared by mixing 50% by weight of coarse air cleaner dust as received after drying for one hour at 230 F [110 °C] with 50% by weight of the +200 mesh screened dust.

1.3 The coarse air cleaner dust as received and the blend used as the standard contaminant have the following approximate particle size analysis: Wt. % in various size ranges, pm.

Size range	As received	Blend
0–5	12	6
5–10	12	6
10–20	14	7
20–40	23	11
40–80	30	32
80–200	9	38

[58 FR 28712, May 14, 1993, as amended at 59 FR 42960, Aug. 19, 1994. Redesignated and amended at 68 FR 43815, July 24, 2003]

APPENDIX B2 TO SUBPART F OF PART
82—PERFORMANCE OF REFRIGERANT
RECOVERY, RECYCLING, AND/OR RE-
CLAIM EQUIPMENT

This appendix is based on the Air-Conditioning and Refrigeration Institute Standard 740-1995.

Section 1. Purpose

1.1 *Purpose.* The purpose of this standard is to establish methods of testing for rating and evaluating the performance of refrigerant recovery, and/or recycling equipment and general equipment requirements (herein referred to as “equipment”) for contaminant or purity levels, capacity, speed and purge loss to minimize emission into the atmosphere of designated refrigerants.

Section 2. Scope

2.1 *Scope.* This standard applies to equipment for recovering and/or recycling single refrigerants, azeotropics, zeotropic blends, and their normal contaminants from refrigerant systems. This standard defines the test apparatus, test gas mixtures, sampling procedures and analytical techniques that will be used to determine the performance of refrigerant recovery and/or recycling equipment (hereinafter, “equipment”).

Section 3. Definitions

3.1 *Definitions.* All terms in this appendix will follow the definitions in §82.152 unless otherwise defined in this appendix.

3.2 *Clearing Refrigerant.* Procedures used to remove trapped refrigerant from equipment before switching from one refrigerant to another.

3.3 *High Temperature Vapor Recovery Rate.* For equipment having at least one designated refrigerant (see 11.2) with a boiling point in the range of –50 to +10 °C, the rate will be measured for R-22, or the lowest boiling point refrigerant if R-22 is not a designated refrigerant.

3.4 *Published Ratings.* A statement of the assigned values of those performance characteristics, under stated rating conditions, by which a unit may be chosen to fit its application. These values apply to all units of like nominal size and type (identification) produced by the same manufacturer. As used herein, the term “published rating” includes the rating of all performance characteristics shown on the unit or published in specifications, advertising or other literature controlled by the manufacturer, at stated rating conditions.

3.5 *Push/Pull Method.* The push/pull refrigerant recovery method is defined as the process of transferring liquid refrigerant from a refrigeration system to a receiving vessel by lowering the pressure in the vessel and raising the pressure in the system, and by connecting a separate line between the system liquid port and the receiving vessel.

3.6 *Recycle Flow Rate.* The amount of refrigerant processed divided by the time elapsed in the recycling mode. For equipment which uses a separate recycling sequence, the recycle rate does not include the recovery rate (or elapsed time). For equipment which does not use a separate recycling sequence, the recycle rate is a rate based solely on the higher of the liquid or vapor recovery rate, by which the contaminant levels were measured.

3.7 *Residual Trapped Refrigerant.* Refrigerant remaining in equipment after clearing.

3.8 *Shall, Should, Recommended or It Is Recommended* shall be interpreted as follows:

3.8.1 *Shall.* Where “shall” or “shall not” is used for a provision specified, that provision

is mandatory if compliance with this appendix is claimed.

3.8.2 *Should, Recommended or It Is Recommended* is used to indicate provisions which are not mandatory but which are desirable as good practice.

3.9 **Standard Contaminated Refrigerant Sample.** A mixture of new or reclaimed refrigerant and specified quantities of identified contaminants which constitute the mixture to be processed by the equipment under test. These contaminant levels are expected only from severe service conditions.

3.10 **Trapped Refrigerant.** The amount of refrigerant remaining in the equipment after the recovery or recovery/recycling operation but before clearing.

3.11 **Vapor Recovery Rate.** The average rate that refrigerant is withdrawn from the mixing chamber between two pressures as vapor recovery rate is changing pressure and temperature starting at saturated conditions either 24 °C or at the boiling point 100 kPa (abs), whichever is higher. The final pressure condition is 10% of the initial pressure, but not lower than the equipment final recovery vacuum and not higher than 100 kPa (abs).

Section 4. General Equipment Requirements

4.1 **Equipment Information.** The equipment manufacturer shall provide operating instructions, necessary maintenance procedures and source information for replacement parts and repair.

4.2 **Filter Replacement.** The equipment shall indicate when any filter/drier(s) needs replacement. This requirement can be met by use of a moisture transducer and indicator light, by use of a sight glass/moisture indicator or by some measurement of the amount of refrigerant processed such as a flow meter or hour meter. Written instructions such as "to change the filter every 181 kg, or every 30 days" shall not be acceptable except for equipment in large systems where the liquid recovery rate is greater than 11.3 kg/min where the filter/drier(s) would be changed for every job.

4.3 **Purge of Non-Condensable.** If non-condensables are purged, the equipment shall either automatically purge non-condensables or provide indicating means to guide the purge process.

4.4 **Purge Loss.** The total refrigerant loss due to purging non-condensables, draining oil and clearing refrigerant (see 9.5) shall be less than 3% (by weight) of total processed refrigerant.

4.5 **Permeation Rate.** High pressure hose assemblies $\frac{1}{8}$ in. [16 mm] nominal and smaller shall not exceed a permeation rate of 3.9 g/cm²/yr (internal surface) at a temperature of 48.8 °C. Hose assemblies that UL recognized as having passed ANSI/UL 1963 requirements shall be accepted without testing. See 7.1.4.

4.6 **Clearing Trapped Refrigerant.** For equipment rated for more than one refrigerant,

the manufacturer shall provide a method and instructions which will accomplish connections and clearing within 15 minutes. Special equipment, other than a vacuum pump or manifold gauge set shall be furnished. The clearing procedure shall not rely upon the storage cylinder below saturated pressure conditions at ambient temperature.

4.7 **Temperature.** The equipment shall be evaluated at 24 °C with additional limited evaluation at 40 °C. Normal operating conditions range from 10 °C to 40 °C.

4.8 **Exemptions.** Equipment intended for recovery only shall be exempt from 4.2 and 4.3.

Section 5. Contaminated Refrigerants

5.1 **Sample Characteristics.** The standard contaminated refrigerant sample shall have the characteristics specified in Table 1, except as provided in 5.2.

5.2 **Recovery-Only Testing.** Recovery equipment not rated for any specific contaminant shall be tested with new or reclaimed refrigerant.

Section 6. Test Apparatus

6.1 **General Recommendations.** The recommended test apparatus is described in the following paragraphs. If alternate test apparatus are employed, the user shall be able to demonstrate that they produce results equivalent to the specified referee apparatus.

6.2 **Self-Contained Equipment Test Apparatus.** The apparatus, shown in Figure 1, shall consist of:

6.2.1 **Mixing Chamber.** A mixing chamber consisting of a tank with a conical-shaped bottom, a bottom port and piping for delivering refrigerant to the equipment, various ports and valves for adding refrigerant to the chamber and stirring means for mixing.

6.2.2 **Filling Storage Cylinder.** The storage cylinder to be filled by the refrigerant transferred shall be cleaned and at the pressure of the recovered refrigerant at the beginning of the test. It will not be filled over 80%, by volume.

6.2.3 **Vapor Feed.** Vapor refrigerant feed consisting of evaporator, control valves and piping to create a 3.0 °C superheat condition at an evaporating temperature of 21 °C $\pm$ 2K.

6.2.4 **Alternative Vapor Feed.** An alternative method for vapor feed shall be to pass the refrigerant through a boiler and then through an automatic pressure regulating valve set at different saturation pressures, moving from saturated pressure at 24 °C to final pressure of recovery.

6.2.5 **Liquid Feed.** Liquid refrigerant feed consisting of control valves, sampling port and piping.

6.2.6 **Instrumentation.** Instrumentation capable of measuring weight, temperature, pressure and refrigerant loss, as required.

TABLE 1—STANDARD CONTAMINATED REFRIGERANT SAMPLES


	R11	R12	R13	R22	R113	R114	R123	R134a	R500	R502	R503
Moisture Content: ppm by Weight of Pure refrigerant	100	80	30	200	100	85	200	200	200	200	30
Particulate Content: ppm by Weight of Pure Refrigerant Characterized by ¹	80	80	NA	80	80	80	80	80	80	80	NA
Acid Content: ppm by Weight of Pure Refrigerant—(mg KOH per kg Refrigerant) Characterized by ²	500	100	NA	500	400	200	500	100	100	100	NA
Mineral Oil Content: % by Weight of Pure Refrigerant	20	5	NA	5	20	20	20	5	5	5	NA
Viscosity (SUS)	300	150		300	300	300	300	150 ³	150	150	
Non-Condensable Gases (Air Content): % by Volume	NA	3	3	3	NA	3	NA	3	3	3	3

¹ Particulate content shall consist of inert materials and shall comply with particulate requirements in appendix B.

² Acid consists of 60% oleic acid and 40% hydrochloric acid on a total number basis.

³ Synthetic ester-based oil.

Figure 1. Test Apparatus for Self-Contained Equipment

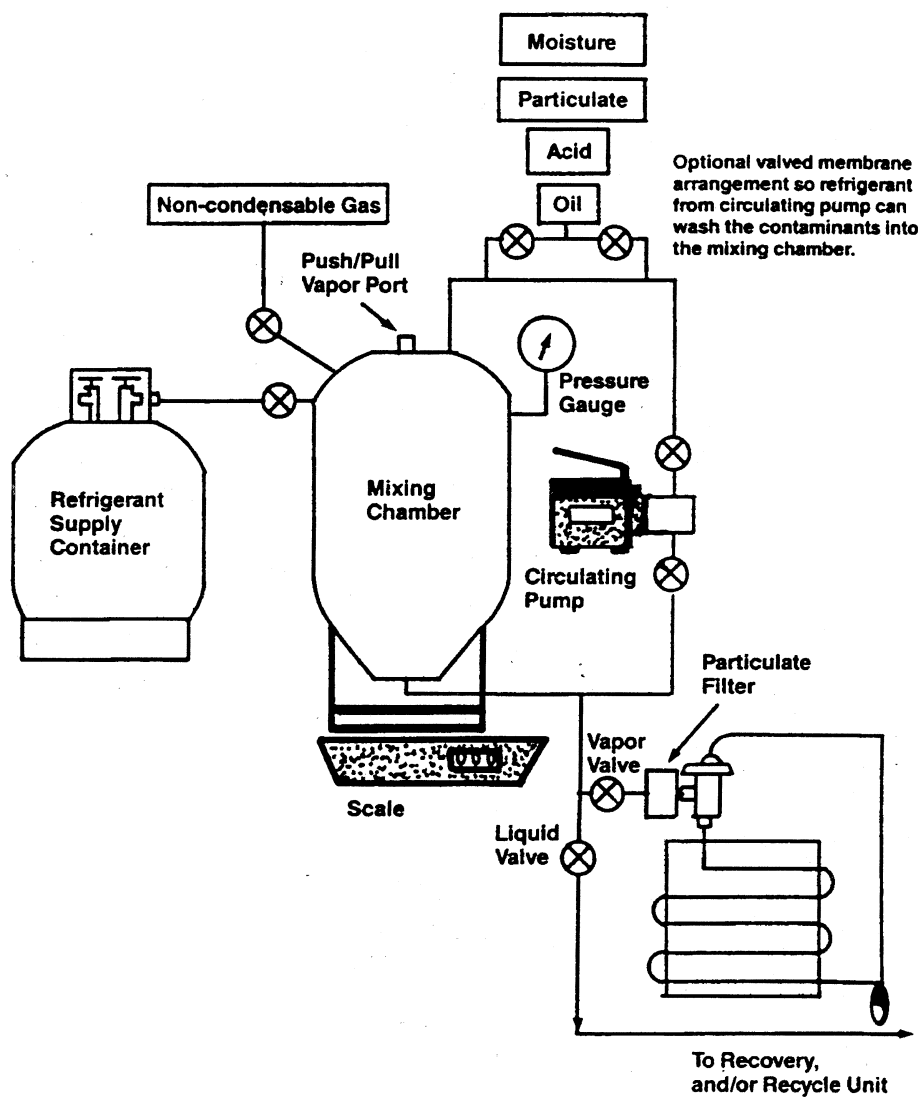

6.3 *Size.* The size of the mixing chamber shall be a minimum of .09 m³. The bottom port and the refrigerant feed shall depend on the size of the equipment. Typically, the mixing valves and piping shall be 9.5 mm. For large equipment to be used on chillers, the minimum inside diameter of ports,

valves and pipings shall be the smaller of the manufacturer's recommendation or 37 mm.

6.4 *System Dependent Equipment Test Apparatus.* This test apparatus is to be used for final recovery vacuum rating of all system dependent equipment.

6.4.1 *Test Setup.* The test apparatus shown in Figure 2 consists of a complete refrigeration system. The manufacturer shall identify the refrigerants to be tested. The test apparatus can be modified to facilitate operation or testing of the system dependent equipment if the modifications to the apparatus are specifically described within the manufacturer's literature. (See Figure 2.) A 6.3 mm balance line shall be connected across the test apparatus between the high and low-pressure sides, with an isolation valve located at the connection to the compressor high side. A 6.3 mm access port with a valve core shall be located in the balance line for the purpose of measuring final recovery vacuum at the conclusion of the test.

Section 7. Performance Testing

7.1 General Testing.

7.1.1 *Temperatures.* Testing shall be conducted at an ambient temperature of 24 °C $\pm$ 1K except high temperature vapor recovery shall be at 40 °C $\pm$ 1K. The evaporator conditions of 6.2.3 shall be maintained as long as liquid refrigerant remains in the mixing chamber.

7.1.2 *Refrigerants.* The equipment shall be tested for all designated refrigerants (see 11.2). All tests in Section 7 shall be completed for each refrigerant before starting tests with the next refrigerant.

7.1.3 *Selected Tests.* Tests shall be as appropriate for the equipment type and ratings parameters selected (see 9.9, 11.1 and 11.2).

7.1.4 *Hose Assemblies.* For the purpose of limiting refrigerant emissions to the atmosphere, hose assemblies shall be tested for permeation according to ANSI/UL Standard 1963, Section 40.10.

7.2 *Equipment Preparation and Operation.* The equipment shall be prepared and operated per the operating instructions.

7.3 *Test Batch.* The test batch consisting of refrigerant sample (see Section 5) of the

test refrigerant shall be prepared and thoroughly mixed. Continued mixing or stirring shall be required during the test while liquid refrigerant remains in the mixing chamber. The mixing chamber shall be filled to 80% level by volume.

7.3.1 *Control Test Batch.* Prior to starting the test for the first batch for each refrigerant, a liquid sample will be drawn from the mixing chamber and analyzed per Section 8 to assure that contaminant levels match Table 1 within $\pm$ 10 ppm for moisture, $\pm$ 20 ppm for particulate, $\pm$ 20 ppm for oleic acid and $\pm$ 0.5% for oil.

7.4 *Recovery Tests (Recovery and Recovery/Recycle Equipment).*

7.4.1 *Determining Recovery Rates.* The liquid and vapor refrigerant recovery rates shall be measured during the first test batch for each refrigerant (see 9.1, 9.2 and 9.4). Equipment preparation and recovery cylinder changeover shall not be included in elapsed time measurements for determining vapor recovery rate and liquid refrigerant recovery rate. Operations such as subcooling the recovery cylinder shall be included. Recovery cylinder shall be the same size as normally furnished or specified in the instructions by the equipment manufacturer. Oversized tanks shall not be permitted.

7.4.1.1 *Liquid Refrigerant Recovery Rate.* If elected, the recovery rate using the liquid refrigerant feed means (see 6.2.5) shall be determined. After the equipment reaches stabilized conditions of condensing temperature and/or recovery cylinder pressure, the recovery process shall be stopped and an initial weight shall be taken of the mixing chamber (see 9.2). The recovery process shall be continued for a period of time sufficient to achieve the accuracy in 9.4. The recovery process shall be stopped and a final weight shall be taken of the mixing chamber.

**Configuration of standard air conditioning or
refrigeration system for use as a test apparatus**

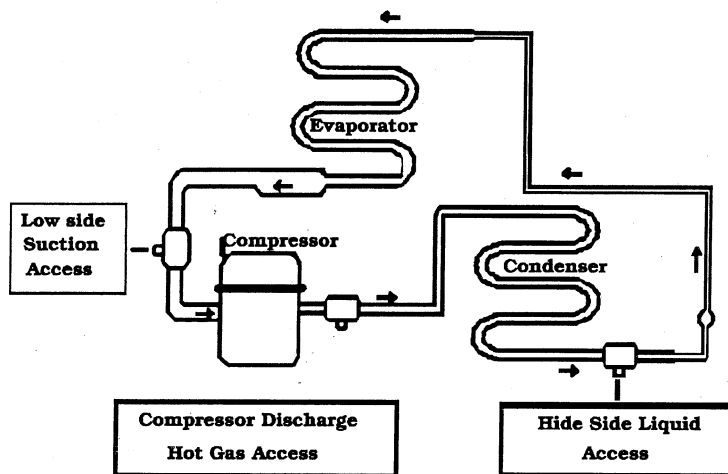


Figure 2. System Dependent Equipment Test Apparatus

7.4.1.2 Vapor Refrigerant Recovery Rate. If elected, the average vapor flow rate shall be measured to accuracy requirements in clause 9.4 under conditions with no liquid refrigerant in the mixing chamber. The liquid recovery feed means shall be used. At initial conditions of saturated vapor at the higher of 24 °C or the boiling temperature (100 kPa absolute pressure), the weight of the mixing chamber and the pressure shall be recorded. At final conditions representing pressure in the mixing chamber of 10% of the initial condition, but not less than the final recovery vacuum (see 9.6) nor more than 100 kPa, measure the weight of the mixing chamber and the elapsed time.

7.4.1.3 High Temperature Vapor Recovery Rate. Applicable for equipment having at least one designated refrigerant (see 11.2) with a boiling point between -50 °C and +10 °C. Measure the rate for R-22, or the refrigerant with the lowest boiling point if R-22 is not a designated refrigerant. Repeat the test in 7.4.1.2 at saturated conditions at 40 °C and continue to operate equipment to assure it will achieve the final recovery vacuum (see 7.4.3).

7.4.2 Recovery Operation. This test is for determining the final recovery vacuum and

the ability to remove contaminants as appropriate. If equipment is rated for liquid recovery (see 7.4.1.3), liquid recovery feed means described in 6.2.5 shall be used. If not, vapor recovery means described in 6.2.3 or 6.2.4 shall be used. Continue recovery operation until all liquid is removed from the test apparatus and vapor is removed to the point where equipment shuts down by automatic means or is manually shut off per operating instructions.

7.4.2.1 Oil Draining. Capture oil from the equipment at intervals as required in the instructions. Record the weight of the container. Completely remove refrigerant from oil by evacuation or other appropriate means. The weight difference shall be used in 9.5.2.

7.4.3 Final Recovery Vacuum. At the end of the first test batch for each refrigerant, the liquid valve and vapor valve of the apparatus shall be closed. After waiting 1 minute, the mixing chamber pressure shall be recorded (see 9.6).

7.4.4 Residual Refrigerant. This test will measure the mass of remaining refrigerant in the equipment after clearing and therefore the potential for mixing refrigerants (see 4.6).

7.4.4.1 *Initial Conditions.* At the end of the last test for each batch for each refrigerant, the equipment shall be disconnected from the test apparatus (Figure 1). Recycle per 7.5, if appropriate. Perform refrigerant clearing operations as called for in the instruction manual. Capture and record the weight of any refrigerant which would have been emitted to the atmosphere during the clearing process for use in 9.5. If two loops are used for recycling, trapped refrigerant shall be measured for both.

7.4.4.2 *Residual Trapped Refrigerant.* Evacuate an empty test cylinder to 1.0 kPa absolute. Record the empty weight of the test cylinder. Open all valves to the equipment so as to provide access to all trapped refrigerant. Connect the equipment to the test cylinder and operate valves to recover the residual refrigerant. Record the weight of the test cylinder using a recovery cylinder pressure no less than specified in 6.2.2. Place the test cylinder in liquid nitrogen for a period of 30 minutes or until a vacuum of 1000 microns is reached, whichever occurs first.

7.5 *Recycling Tests (Recovery/Recycle Equipment).*

7.5.1 *Recycling Operation.* As each recovery cylinder is filled in 7.4.2, recycle according to operating instructions. There will not necessarily be a separate recycling sequence. Note non-condensable purge measurement in 9.5.

7.5.1.1 *Recycle Flow Rate.* While recycling the first recovery cylinder for each refrigerant, determine the recycling flow rate by appropriate means (see 9.3) to achieve the accuracy required in 9.4.

7.5.2 *Non-Condensable Sample.* After completing 7.4.3, prepare a second test batch (7.3). Recover per 7.4.2 until the current recovery cylinder is filled to 80% level by volume. Recycle per 7.5.1. Mark this cylinder and set aside for taking the vapor sample. For equipment having both an internal tank of at least 3 kg refrigerant capacity and an external recovery cylinder, two recovery cylinders shall be marked and set aside. The first is the cylinder described above. The second cylinder is the final recovery cylinder after filling it to 80% level by volume and recycling.

7.5.3 *Liquid Sample for Analysis.* Repeat steps 7.3, 7.4.2 and 7.5.1 with further test batches until indication means in 4.2 show the filter/drier(s) need replacing.

7.5.3.1 *Multiple Pass.* For equipment with a separate recycling circuit (multiple pass), set aside the current cylinder and draw the liquid sample (see 7.4) from the previous cylinder.

7.5.3.2 *Single Pass.* For equipment with the single pass recycling circuit, draw the liquid sample (see 7.4) from the current cylinder.

7.6 *Measuring Refrigerant Loss.* Refrigerant loss due to non-condensables shall be deter-

mined by appropriate means (see 9.5.1). The loss could occur in 7.4.1, 7.4.2 and 7.5.1.

Section 8. Sampling and Chemical Analysis Methods

8.1 *Chemical Analysis.* Chemical analysis methods shall be specified in appropriate standards such as ARI 700-95 and Appendix C to ARI Standard 700-95.

8.2 *Refrigerant Sampling.*

8.2.1 *Water Content.* The water content in refrigerant shall be measured by the Karl Fischer Analytical Method or by the Karl Fischer Coulometric techniques. Report the moisture level in parts per million by weight.

8.2.2 *Chloride Ions.* Chloride ions shall be measured by turbidity tests. At this time, quantitative results have not been defined. Report chloride content as "pass" or "fail." In the future, when quantitative results are possible, report chloride content as parts per million by weight.

8.2.3 *Acidity.* The acidity test uses the titration principle. Report the acidity in parts per million by weight (mg KOH/kg) of sample.

8.2.4 *High Boiling Residue.* High boiling residues shall use measurement of the volume of residue after evaporating a standard volume of refrigerant. Using weight measurement and converting to volumetric units is acceptable. Report high boiling residues as percent by volume.

8.2.5 *Particulates/Solids.* The particulates/solids measurement employs visual examination. Report results as "pass" or "fail."

8.2.6 *Non-condensables.* The level of contamination by non-condensable gases in the base refrigerant being recycled shall be determined by gas chromatography. Report results as percent by volume.

Section 9. Performance Calculation and Rating

9.1 *Vapor Refrigerant Recovery Rate.* This rate shall be measured by weight change of the mixing chamber divided by elapsed time (see 7.4.1.2). The units shall be kg/min and the accuracy shall be per 9.4.

9.1.1 *High Temperature Vapor Recovery Rate.*

9.2 *Liquid Refrigerant Recovery Rate.* This rate shall be measured by weight change of the mixing chamber divided by elapsed time (see 7.4.1.3). The units shall be kg/min and the accuracy shall be per 9.4.

9.3 *Recycle Flow Rate.* The recycle flow rate shall be as defined in 3.10, expressed in kg/min, and the accuracy shall be per 9.4.

9.3.1 For equipment using multi-pass recycling or a separate sequence, the recycle rate shall be determined by dividing the net weight W of the refrigerant to be recycled by the actual time T required to recycle. Any set-up or operator interruptions shall not be included in the time T.

9.3.2 If no separate recycling sequence is used, the recycle rate shall be the higher of the vapor refrigerant recovery rate or the liquid refrigerant recovery rate. The recycle rate shall match a process which leads to contaminant levels in 9.9. Specifically, a recovery rate determined from bypassing a contaminant removal device cannot be used as a recycle rate when the contaminant levels in 9.9 are determined by passing the refrigerant through the contaminant removal device.

9.4 *Accuracy of Flow Rates.* The accuracy of test measurements in 9.1, 9.2 and 9.3 shall be ± 0.08 kg/min or flow rates up to .42 kg/min and $\pm 2.0\%$ for flow rates larger than .42 kg/min. Ratings shall be expressed to the nearest .02 kg/min.

9.5 *Refrigerant Loss.* This calculation will be based upon the net loss of refrigerant which would have been eliminated in the non-condensable purge process (see 7.5.1), the oil draining process (see 7.4.2.1) and the refrigerant clearing process (see 7.4.4.1), all divided by the net refrigerant content of the test batches. The refrigerant loss shall not exceed 3% by weight.

9.5.1 *Non-Condensable Purge.* Evacuate an empty container to 2 kPa absolute. Record the empty weight of the container. Place the container in a dry ice bath. Connect the equipment purge connection to the container and operate purge according to operating instructions so as to capture the non-condensables and lost refrigerant. Weigh the cylinder after the recycling is complete. Equivalent means are permissible.

9.5.2 *Oil Draining.* Refrigerant removed from the oil after draining shall be collected and measured in accordance with 7.4.2.1.

9.5.3 *Clearing Unit.* Refrigerant captured during the clearing process shall be measured in accordance with 7.4.4.1.

9.6 *Final Recovery Vacuum.* The final recovery vacuum shall be the mixing chamber pressure in 7.4.3 expressed in kPa. The accuracy of the measurement shall be within 0.33 kPa.

9.7 *Residual Trapped Refrigerant.* The amount of residual trapped refrigerant shall be the final weight minus the initial weight of the test cylinder in 7.4.4.2, expressed in kg. The accuracy shall be ± 0.02 kg and reported to the nearest 0.05 kg.

9.8 *Quantity Recycled.* The amount of refrigerant processed before changing filters (see 7.5.3) shall be expressed in kg to an accuracy of $\pm 1\%$.

9.9 *Contaminant Levels.* The contaminant levels remaining after testing shall be published as follows:

Moisture content, ppm by weight
Chloride ions, pass/fail
Acidity, ppm by weight
High boiling residue, % (by volume)
Particulates-solid, pass/fail (visual examination)
Non-condensables, % (by volume)

9.10 *Minimum Data Requirements for Published Ratings.* Published ratings shall include all of the parameters as shown in Tables 2 and 3 for each refrigerant designated by the manufacturer.

Section 10. Tolerances

10.1 *Tolerances.* Performance related parameters shall not be less favorable than the published ratings.

Section 11. Marking and Nameplate Data

11.1 *Marking and Nameplate Data.* The nameplate shall display the manufacturer's name, model designation, type of equipment, designated refrigerants, capacities and electrical characteristics where applicable. The nameplate shall also conform to the labeling requirements established for certified recycling and recovery equipment established at 40 CFR 82.158(h).

Recommended nameplate voltages for 60 Hertz systems shall include one or more of the utilization voltages shown in Table 1 of ARI Standard 110-90. Recommended nameplate voltages for 50 Hertz systems shall include one or more of the utilization voltages shown in Table 1 of IEC Standard Publication 38, IEC Standard Voltages.

11.2 *Data for Designated Refrigerants.* For each refrigerant designated, the manufacturer shall include all the following that are applicable per Table 2:

- Liquid Recovery Rate
- Vapor Recovery Rate
- High Temperature Vapor Recovery Rate
- Final Recovery Vacuum
- Recycle Flow Rate
- Residual Trapped Refrigerant
- Quantity Recycled

TABLE 2—PERFORMANCE

Parameter/Type of equipment	Recovery	Recovery/ Recycle	Recycle	System dependent equipment
Liquid Refrigerant Recovery Rate	(1)	(1)	N/A	N/A
Vapor Refrigerant Recovery Rate	(1)	(1)	N/A	N/A
High Temp. Vapor Recovery Rate	(1)	(1)	N/A	N/A
Final Recovery Vacuum	(2)	(2)	N/A	(2)
Recycle Flow Rate	N/A	(2)	(2)	N/A
Refrigerant Loss	(3)	(2)	(2)	(3)

TABLE 2—PERFORMANCE—Continued

Parameter/Type of equipment	Recovery	Recovery/ Recycle	Recycle	System dependent equipment
Residual Trapped Refrigerant	(²)	(²)	(²)	(²)
Quantity Recycled	N/A	(³)	(³)	N/A

¹ Mandatory rating.

² For a recovery or recovery/recycle unit, one must rate either liquid refrigerant recovery rate or vapor refrigerant recovery rate or one can rate for both. If rating only the one, the other shall be indicated by N/A, "not applicable."

³ Mandatory rating for equipment tested for multiple refrigerants.

⁴ Mandatory rating if multiple refrigerants, oil separation or non-condensable purge are rated.

NOTE: For recovery equipment, these parameters are optional. If not rated use N/A, "not applicable."

TABLE 3—CONTAMINANTS

Contaminant/Type of equipment	Recovery	Recovery/ Recycle	Recycle	System dependent equipment
Moisture Content	(*)	(³)	(³)	N/A
Chloride Ions	(*)	(³)	(³)	N/A
Acidity	(*)	(³)	(³)	N/A
High Boiling Residue	(*)	(³)	(³)	N/A
Particulates	(*)	(³)	(³)	N/A
Non-Condensables	(*)	(³)	(³)	N/A

* For recovery equipment, these parameters are optional. If not rated, use N/A, "not applicable."

³ Mandatory rating.

ATTACHMENT 1 TO APPENDIX B2 TO SUBPART F OF PART 82—REFERENCES

Listed here are all standards, handbooks, and other publications essential to the formation and implementation of the standard. All references in this appendix are considered as part of this standard.

- ANSI/UL Standard 1963, *Refrigerant Recovery/Recycling Equipment*, First Edition, 1989, American National Standards Institute/Underwriters Laboratories, Inc.

- ARI Standard 110–90, *Air-Conditioning and Refrigerating Equipment Nameplate Voltages*, Air-Conditioning and Refrigeration Institute

- ARI Standard 700–95, *Specifications for Fluorocarbon and Other Refrigerants*, Air-Conditioning and Refrigeration Institute

- ASHRAE Terminology of Heating, Ventilation, Air Conditioning, Refrigeration, & Refrigeration, American Society of Heating, Refrigerating, and Air-Conditioning Engineers, Inc., 1991

- IEC Standard Publication 38, *IEC Standard Voltages*, International Electrotechnical Commission, 1983

ATTACHMENT 2 TO APPENDIX B2 TO SUBPART F OF PART 82—PARTICULATE USED IN STANDARD CONTAMINATED REFRIGERANT SAMPLE

1. Particulate Specification

B1.1 The particulate material (pm) will be a blend of 50% coarse air cleaner dust as received, and 50% retained on a 200-mesh screen. The coarse air cleaner dust is available from: AC Spark Plug Division; General Motors Corporation; Flint, Michigan.

B1.2 *Preparation of Particulate Materials.*

To prepare the blend of contaminant, first wet screen a quantity of coarse air cleaner dust on a 200-mesh screen (particle retention 74 µm). This is done by placing a portion of the dust on a 200-mesh screen and running water through the screen while stirring the dust with the fingers. The fine contaminant particles passing through the screen are discarded. The +200-mesh particles collected on the screen are removed and dried for one hour at 110 °C. The blend of standard contaminant is prepared by mixing 50% by weight of coarse air cleaner dust as received (after drying for one hour at 110 °C) with 50% by weight of the +200 mesh screened dust.

B1.3 Particle Size Analysis.

The coarse air cleaner dust as received and the blend used as the standard contaminant have the following approximate particle size analysis:

Wt. % in various size ranges, µm.

Size range	As received	Blend
0–5	12	6
5–10	12	6
10–20	14	7
20–40	23	11
40–80	30	32
80–200	9	38

[68 FR 43815, July 24, 2003; 68 FR 54678, Sept. 18, 2003]

APPENDIX B3 TO SUBPART F OF PART 82—PERFORMANCE OF REFRIGERANT RECOVERY, RECYCLING, AND/OR RECLAIM EQUIPMENT

This appendix is based on the Air-Conditioning, Heating, and Refrigeration Institute Standard 740-2016, *Performance Rating of Refrigerant Recovery Equipment and Recovery/Recycling Equipment*.

SECTION 1. PURPOSE

1.1 The purpose of this standard is to establish methods of testing for rating and evaluating the performance of refrigerant recovery, and/or recycling equipment and general equipment requirements (herein referred to as “equipment”) for contaminant or purity levels, capacity, speed and purge loss to minimize emission into the atmosphere of designated refrigerants.

SECTION 2. SCOPE

2.1 This standard applies to equipment for recovering and/or recycling single refrigerants, azeotropes, zeotropic blends, and their normal contaminants from refrigerant systems. This standard defines the test apparatus, test gas mixtures, sampling procedures and analytical techniques that will be used to determine the performance of refrigerant recovery and/or recycling equipment (hereinafter, “equipment”). Appendix B4 of this subpart establishes standards for recovery/recycling equipment used with flammable refrigerants.

SECTION 3. DEFINITIONS

3.1 *Definitions.* All terms in this appendix will follow the definitions in §82.152 unless otherwise defined in this appendix.

3.2 *Clearing Refrigerant.* Procedures used to remove trapped refrigerant(s) from equipment before switching from one refrigerant to another.

3.3 *High Temperature Vapor Recovery Rate.* For equipment having at least one designated refrigerant (see Section 11.2 of this appendix) with a boiling point in the range of -50 to +10 °C, the rate will be measured for R-22, or the lowest boiling point refrigerant if R-22 is not a designated refrigerant.

3.4 *Published Ratings.* A statement of the assigned values of those performance characteristics, under stated rating conditions, by which a unit may be chosen to fit its application. These values apply to all units of like nominal size and type (identification) produced by the same manufacturer. As used herein, the term “published rating” includes the rating of all performance characteristics shown on the unit or published in specifications, advertising, or other literature controlled by the manufacturer, at stated rating conditions.

3.5 *Push/Pull Liquid Recovery.* The push/pull refrigerant recovery method is defined as the process of transferring liquid refrigerant from a refrigeration system to a receiving vessel by lowering the pressure in the vessel and raising the pressure in the system, and by connecting a separate line between the system liquid port and the receiving vessel.

3.6 *Recycle Flow Rate.* The amount of refrigerant processed divided by the time elapsed in the recycling mode. For equipment which uses a separate recycling sequence, the recycle rate does not include the recovery rate (or elapsed time). For equipment which does not use a separate recycling sequence, the recycle rate is a rate based solely on the higher of the liquid or vapor recovery rate, by which the contaminant levels were measured.

3.7 *Residual Trapped Refrigerant.* Refrigerant remaining in equipment after clearing refrigerant.

3.8 *Shall, Should, Recommended or It Is Recommended* shall be interpreted as follows:

3.8.1 *Shall.* Where “shall” or “shall not” is used for a provision specified, that provision is mandatory if compliance with this appendix is claimed.

3.8.2 *Should, Recommended or It Is Recommended* is used to indicate provisions which are not mandatory but which are desirable as good practice.

3.9 *Standard Contaminated Refrigerant Sample.* A mixture of new or reclaimed refrigerant and specified quantities of identified contaminants which constitute the mixture to be processed by the equipment under test. These contaminant levels are expected only from severe service conditions.

3.10 *Trapped Refrigerant.* The amount of refrigerant remaining in the equipment after the recovery or recovery/recycling operation but before clearing refrigerant.

3.11 *Vapor Recovery Rate.* The average rate that refrigerant is withdrawn from the mixing chamber between two pressures as vapor recovery rate is changing depending on the pressure. The initial condition is vapor only at saturation pressure and temperature at either 24 °C or at the boiling point at 100 kPa, whichever is higher. The final pressure condition is 10 percent of the initial pressure, but not lower than the equipment final recovery vacuum and not higher than 100 kPa.

SECTION 4. GENERAL EQUIPMENT REQUIREMENTS

4.1 *Equipment Information.* The equipment manufacturer shall provide operating instructions, necessary maintenance procedures, and source information for replacement parts and repair.

4.2 *Filter Replacement.* The equipment shall indicate when any filter/drier(s) needs replacement. This requirement can be met

by use of a moisture transducer and indicator light, by use of a sight glass/moisture indicator, or by some measurement of the amount of refrigerant processed such as a flow meter or hour meter. The equipment manufacturer must provide maximum quantity recycled or filter change interval in its written instructions.

4.3 *Purge of Non-Condensable.* If non-condensables are purged, the equipment shall either automatically purge non-condensables or provide an indicating means to guide the purge process. Recycling equipment must provide purge means.

4.4 *Purge Loss.* The total refrigerant loss due to purging non-condensables, draining oil, and clearing refrigerant (see Section 9.5) shall be less than 3 percent (by weight) of total processed refrigerant.

4.5 *Permeation Rate.* High pressure hose assemblies $\frac{5}{8}$ in. (16 mm) nominal and smaller shall not exceed a permeation rate of 3.9 g/cm²/yr (internal surface) at a temperature of 48.8 °C. Hose assemblies that UL recognized as having passed UL 1963, 2011 requirements shall be accepted without testing. See Section 7.1.4 of this appendix.

4.6 *Clearing Trapped Refrigerant.* For equipment rated for more than one refrigerant,

the manufacturer shall provide a method and instructions which will accomplish connections and clearing within 15 minutes. Special equipment, other than a vacuum pump or manifold gauge set, shall be furnished. The clearing procedure shall not rely upon the storage cylinder below saturated pressure conditions at ambient temperature.

4.7 *Temperature.* The equipment shall be evaluated at 24 °C with additional limited evaluation at 40 °C. Normal operating conditions range from 10 °C to 40 °C.

4.8 *Exemptions.* Equipment intended for recovery only shall be exempt from Sections 4.2 and 4.3.

SECTION 5. CONTAMINATED REFRIGERANTS

5.1 *Sample Characteristics.* The standard contaminated refrigerant sample shall have the characteristics specified in Table 1, except as provided in Section 5.2 of this appendix. Testing shall be conducted at an ambient temperature of 24 °C $\pm$ 1 °C except high temperature vapor recovery shall be 40 °C $\pm$ 1 °C.

5.2 *Recovery-only Testing.* Recovery equipment not rated for removal of contaminants shall be tested with new or reclaimed refrigerant.

Table 1—Standard Contaminated Refrigerant Samples

	R-11	R-12	R-13	R-22	R-23	R-113	R-114	R-123	R-124	R-134a	R-500	R-502	R-503	R-401A	R-401B	R-402A
Moisture Content: ppm by Weight of Pure Refrigerant	100	80	30	200	30	100	85	200	200	200	200	200	30	200	200	200
Particulate Content: ppm by Weight of Pure Refrigerant ¹	80	80	N/A	80	N/A	80	80	80	80	80	80	80	N/A	80	80	80
Acid Content: ppm by Weight of Pure Refrigerant ²	100	200	N/A	100	N/A	100	100	100	100	100	200	100	N/A	100	100	100
Oil (HBR) Content: % by Weight of Pure Refrigerant	20	5	N/A	5	N/A	20	20	20	5	5	5	5	N/A	5	5	5
Viscosity/Type ³	300/MO 150/MO	N/A	N/A	300/MO	N/A	300/MO 300/MO	300/MO 300/MO	150/MO 300/MO	150/MO	150/MO	150/MO	150/MO	N/A	150/AB	150/AB	150/AB
Non-Condensable Gases (Air Content): % by Volume	N/A	3	3	3	3	N/A	3	N/A	3	3	3	3	3	3	3	3

SECTION 6. TEST APPARATUS

6.1 *General Recommendations.* The recommended test apparatus is described in the following paragraphs. If alternate test appa-

Table 1 (continued) – Standard Contaminated Refrigerant Samples

	R-402B	R-404A	R-406A	R-407A	R-407B	R-407C	R-407D	R-408A	R-409A	R-410A	R-410B	R-411A	R-411B	R-417C	R-419B	R-422E	R-445A	R-507	R-508A	R-508B
Moisture Content: ppm by Weight of Pure Refrigerant	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	20	20
Particulate Content: ppm by Weight of Pure Refrigerant ¹	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	NA	NA
Acid Content: ppm by Weight of Pure Refrigerant ²	100	100	200	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	NA	NA
Oil (HBR) Content: % by Weight of Pure Refrigerant	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	NA	NA
Viscosity/Type ³	150/A 150/P 150/OE	150/A 150/B 150/OE	150/A 150/B 150/OE	150/P 150/OE	150/P 150/OE	150/P 150/OE	150/P 150/OE	150/M 150/O	150/M 150/O	150/P 150/OE	150/P 150/OE	150/M 150/O	150/M 150/O	150/P 150/OE	150/P 150/OE	150/P 150/OE	150/P 150/OE	150/P 150/OE	NA	NA
Non-Condensable Gases (Air Content): % by Volume	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3

¹ Particulate content shall consist of inert materials and shall comply with particulate requirements in Appendix B.

² Acid consists of 60% oleic acid and 40% hydrochloric acid on a total number basis.

³ POE = Polyolester, AB = Alkylbenzene, MO = Mineral Oil.

⁴ N/A means not applicable.

ratus are employed, the user shall be able to demonstrate that they produce results equivalent to the specified reference apparatus.

Pt. 82, Subpt. F, App. B3

40 CFR Ch. I (7–1–24 Edition)

6.2 *Self-Contained Equipment Test Apparatus.* The apparatus, shown in Figure 1, shall consist of:

6.2.1 *Mixing Chamber.* A mixing chamber consisting of a tank with a conical-shaped bottom, a bottom port and piping for delivering refrigerant to the equipment, various ports and valves for adding refrigerant to the chamber, and stirring means for mixing.

6.2.2 *Filling Storage Cylinder.* The storage cylinder to be filled by the refrigerant transferred shall be cleaned and at the pressure of the recovered refrigerant at the beginning of the test. It will not be filled over 80 percent, by volume.

6.2.3 *Vapor Feed.* Vapor refrigerant feed consisting of evaporator, control valves and


piping to create a 3.0 °C superheat condition at an evaporating temperature of $21\text{ °C} \pm 2\text{ °C}$.

6.2.4 *Alternative Vapor Feed.* An alternative method for vapor feed shall be to pass the refrigerant through a boiler and then through an automatic pressure regulating valve set at different saturation pressures, moving from saturated pressure at 24 °C to final pressure of recovery.

6.2.5 *Liquid Feed.* Liquid refrigerant feed consisting of control valves, sampling port, and piping.

6.2.6 *Instrumentation.* Instrumentation capable of measuring weight, temperature, pressure, and refrigerant loss, as required.

Figure 1. Test Apparatus for Self-Contained Equipment

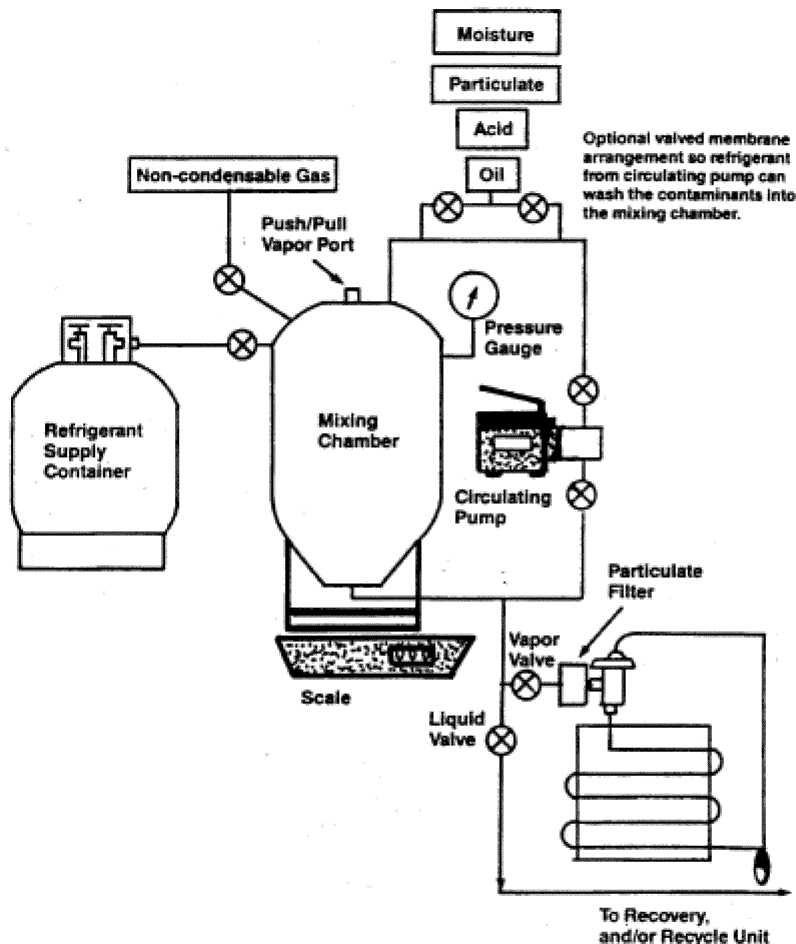

6.3 *Size.* The size of the mixing chamber and filling storage cylinder used during testing shall correspond to the size of the equipment being tested per Section 6.3.1 or 6.3.2:

6.3.1 For equipment utilizing nominal $\frac{1}{4}$ " or $\frac{3}{8}$ " flare ports and hoses, the mixing chamber shall be 0.09 m^3 and all ports, valves, mixing valves, and piping shall be $\frac{1}{2}$ " or larger, reduced down to the port size of the equipment by fittings at the connection ports of the mixing chamber. The filling storage cylinder used during testing shall be a nominal 50-pound water capacity DOT 4Bx cylinder with $\frac{1}{4}$ " flare liquid and vapor ports.


6.3.2 For equipment utilizing $\frac{1}{2}$ " or larger flare ports and hoses, the mixing chamber shall be 0.45 m^3 (or nominal 1000-pound water capacity DOT 4Bx cylinder) and all ports, valves, mixing valves, and piping shall be $1\frac{1}{2}$ " or larger, reduced down to the port size of the equipment by fittings at the connection ports of the mixing chamber. The filling storage cylinder used during testing shall be a nominal 1000-pound water capacity DOT 4Bx cylinder with liquid and vapor ports, valves and piping sized $\frac{3}{4}$ " NPT and reduced or increased to the port size of the equipment by fittings at the connection ports of the filling storage cylinder.

6.4 *System Dependent Equipment Test Apparatus.* This test apparatus is to be used for final recovery vacuum rating of all system dependent equipment.

6.4.1 *Test Setup.* The test apparatus shown in Figure 2 consists of a complete refrigeration system. The manufacturer shall identify the refrigerants to be tested. The test apparatus can be modified to facilitate operation or testing of the system dependent equipment if the modifications to the apparatus

are specifically described within the manufacturer's literature. A 6.3 mm balance line shall be connected across the test apparatus between the high- and low-pressure sides, with an isolation valve located at the connection to the compressor high side. A 6.3 mm access port with a valve core shall be located in the balance line for the purpose of measuring final recovery vacuum at the conclusion of the test.

Figure 2. System Dependent Equipment Test Apparatus

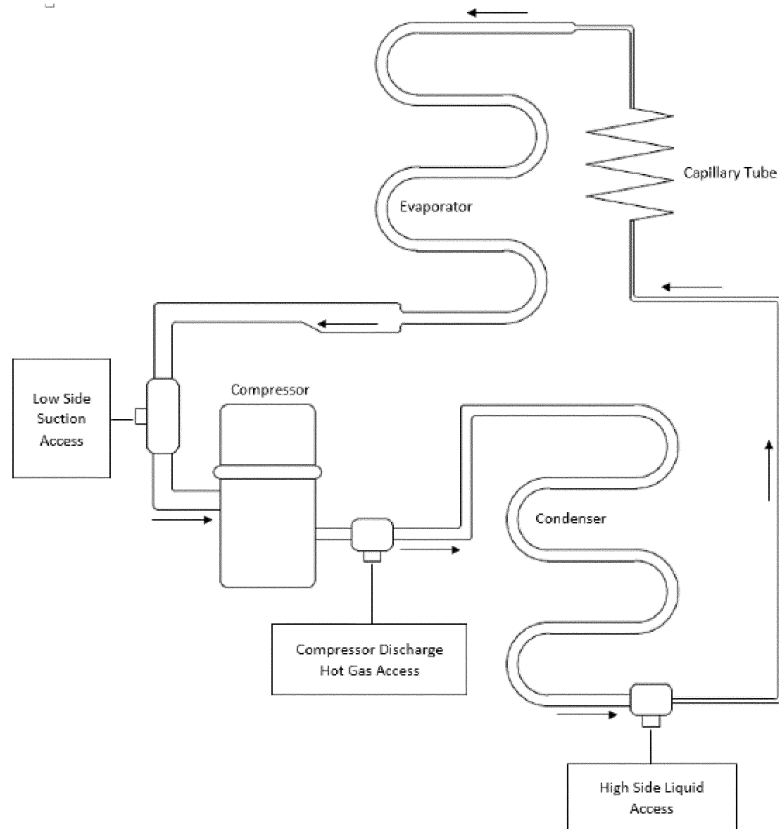

SECTION 7. PERFORMANCE TESTING PROCEDURES

7.1 General Testing.

7.1.1 *Temperatures.* Testing shall be conducted at an ambient temperature of $24\text{ }^{\circ}\text{C} \pm 1\text{ }^{\circ}\text{C}$ except high temperature vapor recovery shall be at $40\text{ }^{\circ}\text{C} \pm 1\text{ }^{\circ}\text{C}$. The evaporator conditions of Section 6.2.3 shall be maintained as

long as liquid refrigerant remains in the mixing chamber.

7.1.2 *Refrigerants.* The equipment shall be tested for all designated refrigerants (see Section 11.2). All tests in Section 7 shall be completed for each refrigerant before starting tests with the next refrigerant.

7.1.3 *Selected Tests.* Tests shall be as appropriate for the equipment type and ratings

parameters selected (see Sections 9.9, 11.1 and 11.2).

7.1.4 Hose Assemblies. For the purpose of limiting refrigerant emissions to the atmosphere, hose assemblies shall be tested for permeation according to UL Standard 1963 (incorporated by reference, see §82.168).

7.2 Equipment Preparation and Operation. The equipment shall be prepared and operated per the operating instructions.

7.3 Test Batch. The test batch consisting of refrigerant sample (see Section 5) of the test refrigerant shall be prepared and thoroughly mixed. Continued mixing or stirring shall be required during the test while liquid refrigerant remains in the mixing chamber. The mixing chamber shall be filled to 80 percent level by volume.

7.3.1 Control Test Batch. Prior to starting the test for the first batch for each refrigerant, a liquid sample will be drawn from the mixing chamber and analyzed per Section 8 to assure that contaminant levels match Table 1 within ± 10 ppm for moisture, ± 20 ppm for oleic acid and ± 0.5 percent for oil.

7.4 Recovery Tests (Recovery and Recovery/Recycling Equipment)

7.4.1 Determining Recovery Rates. The liquid and vapor refrigerant recovery rates shall be measured during the first test batch for each refrigerant (see Sections 9.1, 9.2 and 9.4). Equipment preparation and recovery cylinder changeover shall not be included in elapsed time measurements for determining vapor recovery rate and liquid refrigerant recovery rate. Operations such as subcooling the recovery cylinder shall be included. The recovery cylinder shall be the same size as per Section 6.3 or as furnished by the equipment manufacturer. Oversized tanks shall not be permitted.

7.4.1.1 Liquid Refrigerant Recovery Rate. If elected, the recovery rate using the liquid refrigerant feed means (see Section 6.2.5) shall be determined. After the equipment reaches stabilized conditions of condensing temperature and/or recovery cylinder pressure, the recovery process shall be stopped and an initial weight shall be taken of the mixing chamber (see Section 9.2). The recovery process shall be continued for a period of time sufficient to achieve the accuracy in Section 9.4. The recovery process shall be stopped and a final weight of the mixing chamber shall be taken.

7.4.1.2 Vapor Refrigerant Recovery Rate. If elected, the average vapor flow rate shall be measured to accuracy requirements in Section 9.4 under conditions with no liquid refrigerant in the mixing chamber. The liquid recovery feed means shall be used. At initial conditions of saturated vapor at the higher of 24 °C or the boiling temperature (100 kPa), the weight of the mixing chamber and the pressure shall be recorded. At final conditions representing pressure in the mixing chamber of 10 percent of the initial condi-

tion, but not less than the final recovery vacuum (see Section 9.6) nor more than 100 kPa, measure the weight of the mixing chamber and the elapsed time. At initial conditions, the recovery cylinder shall be at saturation pressure at ambient conditions.

7.4.1.3 High Temperature Vapor Recovery Rate. This is applicable for equipment having at least one designated refrigerant (see Section 11.2) with a boiling point between -50 °C and +10 °C. Measure the rate for R-22, or the refrigerant with the lowest boiling point if R-22 is not a designated refrigerant. Repeat the test in Section 7.4.1.2 at saturated conditions at 40 °C and continue to operate equipment to assure it will operate at this condition (see Section 7.4.3). At initial conditions, the recovery cylinder shall be at saturated pressure at 40 °C.

7.4.1.4 Push/Pull Liquid Refrigerant Recovery Rate. If elected, the average liquid push/pull flow rate shall be measured to accuracy requirements in Section 9.4. The mixing chamber and filling storage cylinder shall be filled with refrigerant vapor at initial conditions of saturated vapor at the higher of 24 °C or the boiling temperature at 100 kPa. An amount of liquid refrigerant shall be added to the mixing chamber equivalent to 80 percent by weight of the capacity of the filling storage cylinder. The pressure between the mixing chamber and filling storage cylinder shall be equalized and stabilized at initial conditions of saturated vapor at the higher of 24 °C or the boiling temperature at 100 kPa. The initial weight of the mixing chamber and the pressure shall be recorded. The equipment is then operated in push/pull liquid recovery mode and the weight change of the mixing chamber is recorded over time until all of the liquid has been transferred.

7.4.2 Recovery Operation. This test is for determining the final recovery vacuum and the ability to remove contaminants as appropriate. If equipment is rated for liquid recovery (see Section 7.4.1.3), liquid recovery feed means described in Section 6.2.5 shall be used. If not, vapor recovery means described in Sections 6.2.3 or 6.2.4 shall be used. Continue recovery operation until all liquid is removed from the test apparatus and vapor is removed to the point where equipment shuts down by automatic means or is manually shut off per operating instructions.

7.4.2.1 Oil Draining. Capture oil from the equipment at intervals as required in the instructions. Record the weight of the container. Completely remove refrigerant from oil by evacuation or other appropriate means. The weight difference shall be used in Section 7.5.2.

7.4.3 Final Recovery Vacuum. At the end of the first test batch for each refrigerant, the liquid valve and vapor valve of the apparatus shall be closed. After waiting 1 minute, the mixing chamber pressure shall be recorded (see Section 9.6).

7.4.4 *Residual Refrigerant.* This test will measure the mass of remaining refrigerant in the equipment after clearing and therefore the extent of mixing different refrigerants (see Section 9.6).

7.4.4.1 *Initial Conditions.* At the end of the last test for each batch for each refrigerant, the equipment shall be disconnected from the test apparatus (Figure 1). Recycle per Section 7.5, if appropriate. Perform refrigerant clearing operations as called for in the instruction manual. Capture and record the weight of any refrigerant which would have been emitted to the atmosphere during the clearing process for use in Section 9.5. If two loops are used for recycling, trapped refrigerant shall be measured for both.

7.4.4.2 *Residual Trapped Refrigerant.* Evacuate an empty test cylinder to 1.0 kPa. Record the empty weight of the test cylinder. Open all valves to the equipment so as to provide access to all trapped refrigerant. Connect the equipment to the test cylinder and operate valves to recover the residual refrigerant. Record the weight of the test cylinder using a recovery cylinder pressure no less than specified in Section 6.2.2. Place the test cylinder in liquid nitrogen for a period of 30 minutes or until a vacuum of 1000 microns is reached, whichever occurs first.

7.5 *Recycling Tests (Recovery/Recycling Equipment).*

7.5.1 *Recycling Operation.* As each recovery cylinder is filled in Section 7.4.2, recycle according to operating instructions. There will not necessarily be a separate recycling sequence. Note non-condensable purge measurement in Section 9.5.

7.5.1.1 *Recycle Flow Rate.* While recycling the first recovery cylinder for each refrigerant, determine the recycling flow rate by appropriate means (see Section 9.3) to achieve the accuracy required in Section 9.4.

7.5.2 *Non-Condensable Sample.* After completing Section 7.4.3, prepare a second test batch (see Section 7.3). Recover per Section 7.4.2 until the current recovery cylinder is filled to 80 percent level by volume. Recycle per Section 7.5.1. Mark this cylinder and set aside for taking the vapor sample. For equipment having both an internal tank of at least 3 kg refrigerant capacity and an external recovery cylinder, two recovery cylinders shall be marked and set aside. The first is the cylinder described above. The second cylinder is the final recovery cylinder after filling it to 80 percent level by volume and recycling.

7.5.2.1 *Push/Pull Liquid Refrigerant Recovery Rate.* This rate shall be measured by weight change of the mixing chamber divided by elapsed time (see Section 7.4.1.4). The units shall be kg/min and the accuracy shall be per Section 9.4.

7.5.3 *Liquid Sample for Analysis.* Repeat steps in Sections 7.3, 7.4.2 and 7.5.1 with further test batches until indication means in

Section 4.2 show the filter/drier(s) need replacing.

7.5.3.1 *Multiple Pass.* For equipment with a separate recycling circuit (multiple pass), set aside the current cylinder and draw the liquid sample (see Section 7.4) from the previous cylinder.

7.5.3.2 *Single Pass.* For equipment with the single pass recycling circuit, draw the liquid sample (see Section 7.4) from the current cylinder.

7.6 *Measuring Refrigerant Loss.* Refrigerant loss due to non-condensables shall be determined by appropriate means (see Section 9.5.1). The loss could occur in Sections 7.4.1, 7.4.2 and 7.5.1.

SECTION 8. SAMPLING AND CHEMICAL ANALYSIS METHODS

8.1 *Chemical Analysis.* Chemical analysis methods shall be specified in appropriate standards such as AHRI Standard 700, 2008 Appendix C for Analytical Procedures for AHRI Standard 700–2014– Normative, and Addendum 700–1 to Appendix C. If alternate test methods are employed, the laboratory must be able to demonstrate that they produce results equivalent to the specified referee method.

8.2 *Refrigerant Sampling.*

8.2.1 *Moisture Content.* The water content in refrigerant shall be measured by the Karl Fischer Coulometric Titration technique. Report the moisture level in parts per million by weight.

8.2.2 *Chloride Ions.* Chloride ions shall be measured by turbidity tests. At this time, quantitative results have not been defined. Report chloride content as “pass” or “fail.” In the future, when quantitative results are possible, report chloride content as parts per million by weight.

8.2.3 *Acid Content.* The acidity test uses the titration principle. Report the acidity in parts per million by weight (mg KOH/kg) of sample.

8.2.4 *High Boiling Residue.* High boiling residues shall use measurement of the volume of residue after evaporating a standard volume of refrigerant. Using weight measurement and converting to volumetric units is acceptable. Report high boiling residues as percent by volume.

8.2.5 *Particulates/Solids.* The particulates/solids measurement employs visual examination. Report results as “pass” or “fail.”

8.2.6 *Non-condensables.* The level of contamination by non-condensable gases in the base refrigerant being recycled shall be determined by gas chromatography. Report results as percent by volume.

SECTION 9. PERFORMANCE CALCULATIONS FOR RATINGS

9.1 *Vapor Refrigerant Recovery Rate.* This rate shall be measured by weight change of

the mixing chamber divided by elapsed time (see 7.4.1.2). The units shall be kg/min and the accuracy shall be per Section 9.4.

9.1.1 *High Temperature Vapor Recovery Rate.* This rate shall be measured by measured weight change of the mixing chamber divided by elapsed time (see Section 7.4.1.3). The units shall be kg/min and the accuracy shall be per Section 9.4.

9.2 *Liquid Refrigerant Recovery Rate.* This rate shall be measured by weight change of the mixing chamber divided by elapsed time (see 7.4.1.3). The units shall be kg/min and the accuracy shall be per Section 9.4.

9.3 *Recycle Flow Rate.* The recycle flow rate shall be as defined in Section 3.12, expressed in kg/min, and the accuracy shall be per Section 9.4.

9.3.1 For equipment using multi-pass recycling or a separate sequence, the recycle rate shall be determined by dividing the net weight, W, of the refrigerant to be recycled by the actual time T required to recycle. Any set-up or operator interruptions shall not be included in the time T.

9.3.2 If no separate recycling sequence is used, the recycle rate shall be the higher of the vapor refrigerant recovery rate or the liquid refrigerant recovery rate. The recycle rate shall match a process which leads to contaminant levels in Section 9.9. Specifically, a recovery rate determined from bypassing a contaminant removal device cannot be used as a recycle rate when the contaminant levels in Section 9.9 are determined by passing the refrigerant through the contaminant removal device.

9.4 *Accuracy of Flow Rates.* The accuracy of test measurements in Sections 9.1, 9.2 and 9.3 shall be ± 0.08 kg/min for flow rates up to 0.42 kg/min and ± 2.0 percent for flow rates larger than 0.42 kg/min. Ratings shall be expressed to the nearest 0.02 kg/min.

9.5 *Refrigerant Loss.* This calculation will be based upon the net loss of refrigerant which would have been eliminated in the non-condensable purge process (see Section 7.5.1), the oil draining process (see Section 7.4.2.1) and the refrigerant clearing process (see Section 7.4.4.1), all divided by the net refrigerant content of the test batches. The refrigerant loss shall not exceed 3 percent by weight.

9.5.1 *Non-Condensable Purge.* Evacuate an empty container to 2 kPa. Record the empty weight of the container. Place the container in a dry ice bath. Connect the equipment purge connection to the container and operate purge according to operating instructions so as to capture the non-condensables and lost refrigerant. Weigh the cylinder after the recycling is complete. Equivalent means are permissible.

For units which either recycle or publish (list) non-condensable removal, non-condensable gases are purged, operating the recycle device per the manufacturer's instructions

through an evaporator pressure regulator (EPR) valve into a liquid nitrogen-chilled cylinder. This combination will simulate the atmosphere while allowing the capture of purge gases. The cylinder is weighed before and after the purge procedure.

9.5.2 *Oil Draining.* Refrigerant removed from the oil after draining shall be collected and measured in accordance with Section 7.4.2.1.

9.5.3 *Clearing Unit.* Refrigerant captured during the clearing process shall be measured in accordance with Section 7.4.4.1.

9.6 *Final Recovery Vacuum.* The final recovery vacuum shall be the mixing chamber pressure in Section 7.4.3 expressed in kPa at 24 °C. The accuracy of the measurement shall be within 0.33 kPa.

9.7 *Residual Trapped Refrigerant.* The amount of residual trapped refrigerant shall be the final weight minus the initial weight of the test cylinder in Section 7.4.4.2, expressed in kg. The accuracy shall be ± 0.02 kg and reported to the nearest 0.05 kg.

9.8 *Refrigerant Processed.* The amount of refrigerant processed before changing filters (see Section 7.5.3) shall be expressed in kg to an accuracy of ± 1 percent.

9.9 *Contaminant Levels.* The contaminant levels remaining after testing shall be published as follows:

Moisture content, ppm by weight

Chloride ions, pass/fail

Acid Content, ppm by weight

High boiling residue, percent (by volume)

Particulates/solids, pass/fail (visual examination)

Non-condensables, percent (by volume)

9.10 *Minimum Data Requirements for Published Ratings.* Published ratings shall include all of the parameters as shown in Tables 2 and 3 for each refrigerant designated by the manufacturer.

SECTION 10. TOLERANCES

10.1 *Tolerances.* Performance related parameters shall be equal to or better than the published ratings.

SECTION 11. MARKING AND NAMEPLATE DATA

11.1 *Marking and Nameplate Data.* The nameplate shall display the manufacturer's name, model designation, type of equipment (Recovery or Recovery/Recycling and Self-Contained or System Dependent), designated refrigerant(s), capacities, and electrical characteristics where applicable. The nameplate shall also conform to the labeling requirements established for certified recycling and recovery equipment established at 40 CFR 82.158(h).

Recommended nameplate voltages for 60 Hertz systems shall include one or more of the equipment nameplate voltages shown in Table 1 of AHRI 110-2016 (incorporated by

reference, see §82.168). Recommended nameplate voltages for 50 Hertz systems shall include one or more of the utilization voltages shown in Table 1 of IEC 60038 (English version) (incorporated by reference, see §82.168).

11.2 *Data for Designated Refrigerants.* For each refrigerant designated, the manufacturer shall include all the following that are applicable per Table 2:

- a. Liquid Recovery Rate, kg/min
- b. Vapor Recovery Rate, kg/min
- c. High Temperature Vapor Recovery Rate, kg/min
- d. Push/Pull Liquid Recovery Rate, kg/min
- e. Final Recovery Vacuum Level, kPa
- f. Recycle Flow Rate, kg/min
- g. Refrigerant Loss, kg
- h. Residual Trapped Refrigerant, kg
- i. Quantity of Refrigerant Processed at Rated Conditions, kg

TABLE 2—PERFORMANCE RATINGS FOR REFRIGERANT RECOVERY AND RECOVERY/RECYCLING EQUIPMENT^{4,5}

Parameter	Type of equipment			
	Recovery	Recovery/recycling	Recycling	System dependent equipment
Liquid Refrigerant Recovery Rate, kg/min	X ^{1,4}	X ¹	N/A ⁵	N/A
Vapor Refrigerant Recovery Rate, kg/min	X ¹	X ¹	N/A	N/A
High Temperature Vapor Recovery Rate, kg/min	X ¹	X ¹	N/A	N/A
Push/Pull Liquid Recovery Rate, kg/min	X ¹	X ¹	N/A	N/A
Final Recovery Vacuum Level, kPa	X	X	N/A	X
Recycle Flow Rate, kg/min	N/A	X	X	N/A
Refrigerant Loss, kg	X ²	X	X	X ³
Residual Trapped Refrigerant, kg	X ³	X ²	X ²	X ²
Quantity of Refrigerant Processed at Rated Conditions, kg	N/A	X	X	N/A

¹ For a recovery or recovery/recycle unit, one must rate either liquid refrigerant recovery rate or vapor refrigerant recovery rate or one can rate for both. If rating only one, the other shall be indicated by N/A, "not applicable."

² Mandatory rating if multiple refrigerants, oil separation or non-condensable purge are rated.

³ Mandatory rating for equipment tested for multiple refrigerants.

⁴ "X" denotes mandatory rating or equipment requirements.

⁵ "N/A" indicates "Not Applicable" for a parameter that does not have a rating.

TABLE 3—CONTAMINANT REMOVAL RATINGS FOR REFRIGERANT RECOVERY AND RECOVERY/RECYCLING EQUIPMENT^{1,2}

Contaminant	Type of equipment			
	Recovery	Recovery/recycling	Recycling	System dependent equipment
Moisture Content, ppm by weight	N/A ²	X ¹	X	N/A
Chloride Ions, pass/fail	N/A	X	X	N/A
Acid Content, ppm by weight	N/A	X	X	N/A
High Boiling Residue, % by volume	N/A	X	X	N/A
Particulates/solids, pass/fail	N/A	X	X	N/A
Non-condensables, % by volume	N/A	X	X	N/A

¹ "X" denotes mandatory rating.

² "N/A" indicates "Not Applicable" for a parameter that does not have a rating.

SECTION 12. REFERENCES

Listed here are all standards, handbooks, and other publications essential to the formation and implementation of the standard. All references in this appendix are considered as part of this standard.

- UL 1963, *Standard for Safety Refrigerant Recovery/Recycling Equipment*, Fourth Edition (with revisions through October 13, 2013), dated June 1, 2011, (incorporated by reference, see §82.168).
- AHRI 110–2016, *2016 Standard for Air-Conditioning, Heating and Refrigerating Equipment Nameplate Voltages*, copyright 2016 (incorporated by reference, see §82.168).

- AHRI Standard 700–2015, *Specifications for Refrigerants, Air-Conditioning, Heating, and Refrigeration Institute*

- IEC 60038 *IEC Standard Voltages*, Edition 7.0, 2009–06 (English version) (incorporated by reference, see §82.168).

SECTION 13.0. PARTICULATE USED IN STANDARD CONTAMINATED REFRIGERANT SAMPLE

13.1 Particulate Specification

13.1.1 The particulate material (pm) will be a blend of 50 percent coarse air cleaner dust as received, and 50 percent retained on a 200-mesh screen. The coarse air cleaner

Environmental Protection Agency

Pt. 82, Subpt. F, App. C

dust is available from: AC Spark Plug Division; General Motors Corporation; Flint, Michigan.

13.1.2 *Preparation of Particulate Materials.* To prepare the blend of contaminant per ANSI/ASHRAE Standard 63.2-1996 (RA 2010), first wet screen a quantity of coarse air cleaner dust on a 200-mesh screen (particle retention 74 µm). This is done by placing a portion of the dust on a 200-mesh screen and running water through the screen while stirring the dust with the fingers. The fine contaminant particles passing through the screen are discarded. The larger than 200-mesh particles collected on the screen are removed and dried for one hour at 110 °C. The blend of standard contaminant is prepared by mixing 50 percent by weight of coarse air cleaner dust as received (after drying for one hour at 110 °C) with 50 percent by weight of the larger than 200-mesh screened dust.

13.1.3 *Particle Size Analysis.* The coarse air cleaner dust as received and the blend used as the standard contaminant have the following approximate particle size analysis:

TABLE B1—WEIGHT PERCENTAGE IN VARIOUS µm SIZE RANGES FOR PARTICLE SIZE ANALYSIS

Size range (µm)	As received (wt %)	Blend (wt %)
0–5	12	6
5–10	12	6
10–20	14	7
20–40	23	11
40–80	30	32
80–200	9	38

[81 FR 82383, Nov. 18, 2016]

APPENDIX B4 TO SUBPART F OF PART 82—PERFORMANCE AND SAFETY OF FLAMMABLE REFRIGERANT RECOVERY AND/OR RECYCLING EQUIPMENT

This appendix is based on the Air-Conditioning, Heating, and Refrigeration Institute Standard 740-2016, *Performance Rating of Refrigerant Recovery Equipment and Recovery/Recycling Equipment*, and Underwriters Laboratories Standard 1963-2011 (Fourth Edition), *Standard for Safety: Refrigerant Recovery/Recycling Equipment*, including Supplement SB (added October 11, 2013), *Requirements for Refrigerant Recovery/Recycling Equipment Intended for Use with a Flammable Refrigerant*.

SECTION 1. PURPOSE

1.1 The purpose of this standard is to establish methods of testing for rating and evaluating the performance and safety of refrigerant recovery and/or recycling equipment and general equipment requirements (herein referred to as “equipment”) for contaminant or purity levels, capacity, speed

and purge loss to minimize emission into the atmosphere of designated refrigerants, as well as safety for use with flammable refrigerants.

SECTION 2. SCOPE

2.1 This standard applies to equipment for recovering and/or recycling flammable single refrigerants, azeotropes, zeotropic blends, and their normal contaminants from refrigerant systems. This standard defines the test apparatus, test gas mixtures, sampling procedures, analytical techniques, and equipment construction that will be used to determine the performance and safety of refrigerant recovery and/or recycling equipment (hereinafter, “equipment”).

SECTION 3. DEFINITIONS

3.1 All terms in this appendix will follow the definitions in §82.152 and Appendix B3 to Subpart F of Part 82 unless otherwise defined in this appendix.

3.2 All definitions used in UL 1963, including the definitions in Supplement SB, as applicable, are incorporated by reference, see §82.168.

SECTION 4. EVALUATION OF PERFORMANCE

4.1 *Performance Ratings.* All recovery and/or recycling equipment to be tested under this appendix must follow the procedures and meet all requirements established in Appendix B3 to Subpart F of Part 82 to determine the performance ratings in addition to the safety evaluation conducted under the rest of this appendix.

4.2 *Safety.* All recovery and/or recycling equipment to be tested under this appendix must follow the procedures and meet all requirements in Supplement SB (added October 11, 2013), *Requirements for Refrigerant Recovery/Recycling Equipment Intended for Use with a Flammable Refrigerant* in Underwriters Laboratories Standard 1963-2011 (Fourth Edition), *Standard for Safety: Refrigerant Recovery/Recycling Equipment* (incorporated by reference, see §82.168).

[81 FR 82390, Nov. 18, 2016]

APPENDIX C TO SUBPART F OF PART 82—METHOD FOR TESTING RECOVERY DEVICES FOR USE WITH SMALL APPLIANCES

Recovery Efficiency Test Procedure for Refrigerant Recovery Equipment Used on Small Appliances

The following test procedure is utilized to evaluate the efficiency of equipment designed to recover ozone depleting refrigerants (or any substitute refrigerant subject to the recycling rules promulgated pursuant to section 608 of the Clean Air Act Amendments of 1990) from small appliances when

service of those appliances requires entry into the sealed refrigeration system or when those appliances are destined for disposal. This procedure is designed to calculate on a weight or mass basis the percentage of a known charge of CFC-12 refrigerant removed and captured from a test stand refrigeration system. Captured refrigerant is that refrigerant delivered to a container suitable for shipment to a refrigerant reclaimer plus any refrigerant remaining in the recovery system in a manner that it will be transferred to a shipping container after additional recovery operations.

The test stand refrigeration system required for this procedure is constructed with standard equipment utilized in currently produced household refrigerator and freezer products. The procedure also accounts for compressor oils that might be added to or removed from the test stand compressor or any compressor used in the recovery system.

I. TEST STAND

Test stands are constructed in accordance with the following standards.

1. Evaporator— $\frac{5}{16}$ in. outside dia. with 30 cu. in. volume.
2. Condenser— $\frac{1}{4}$ in. outside dia. with 20 cu. in. volume.
3. Suction line capillary heat exchanger—appropriate for compressor used.
4. An 800-950 Btu/hr high side case (rotary) compressor; or (depending on the test scenario);
5. An 800-9500 Btu/hr low side case (reciprocating) compressor.

A person seeking to have its recovery system certified shall specify the compressors by manufacturer and model that are to be used in test stands constructed for evaluation of its equipment, and the type and quantity of compressor to be used in those compressors. Only a compressor oil approved for use by the compressor's manufacturer may be specified, and the quantity of compressor oil specified shall be an appropriate quantity for the type of oil and compressor to be used. In order to reduce the cost of testing, the person seeking certification of its recovery system may supply an EPA approved third party testing laboratory with test stands meeting these standards for use in evaluating its recovery system.

II. TEST CONDITIONS

Tests are to be conducted at 75 degrees F, plus or minus 2 degrees F (23.9 C $\pm$ 1.1 C). Separate tests are conducted on both high side case compressor stands and low side case compressor stands. Separate tests are also conducted with the test stand compressor running during the recovery operation, and without the test stand compressor running during the recovery operation, to calculate

the system's recovery efficiency under either condition.

These tests are to be performed using a representative model of all equipment used in the recovery system to deliver recovered refrigerant to a container suitable for shipment to a refrigerant reclaimer. The test stands are to be equipped with access valves permanently installed as specific by the recovery system's vendor to represent the valves used with that system in actual field operations.

A series of five (5) recovery operations are to be performed for each compressor scenario and a recovery efficiency is calculated based on the total quantity of refrigerant captured during all five (5) recoveries. Alternatively, at the request of the recovery system's vendor, a recovery efficiency is to be calculated for each recovery event. In this case, a statistically significant number of recovery operations are to be performed. Determination of what is a statistically significant number of recoveries is to be calculated as set out below. These individual recovery efficiencies are then averaged.

There are four (4) compressor scenarios to be tested. These are a high side case compressor in working condition; a high side case compressor in nonworking condition; a low side case compressor in working condition; and a low side case compressor in nonworking condition. Recovery efficiencies calculated for the two working compressor scenarios are to be averaged to report a working compressor performance. The two nonworking compressor efficiencies are also to be averaged to report a nonworking compressor performance.

If large scale equipment is required in the system to deliver recovered refrigerant to a refrigerant reclaimer (eg. carbon desorption equipment) and it is not possible to have that equipment evaluated under the procedure, the system's vendor shall obtain engineering data on the performance of that large scale equipment that will reasonably demonstrate the percentage refrigerant lost when processed by that equipment. That data will be supplied to any person required to evaluate the performance of those systems. The following procedure will also be modified as needed to determine the weight of refrigerant recovered from a test stand and delivered to a container for shipment to the large process equipment for further processing. The percentage loss documented to occur during processing is then to be applied to the recovery efficiencies calculated in this modified procedure to determine the overall capture efficiency for the entire system.

The following are definitions of symbols used in the test procedure.

Test Stand:

“TSO” means an original test stand weight.

“TSC” means a charged test stand weight.

Environmental Protection Agency

Pt. 82, Subpt. F, App. C

Shipping Containers:

“SCO” means the original or empty weight of shipping container(s).

“SCF” means the final or full weight of shipping container(s).

Recover/Transfer System:

“RSO” means the original weight of a recovery/transfer system.

“RSF” means the final weight of a recovery/transfer system.

“OL” means the net amount of oil added/removed from the recovery device and/or transfer device between the beginning and end of the test for one compressor scenario.

Weighing steps are conducted with precision and accuracy of plus or minus 1.0 gram.

III. TEST PROCEDURE

1. Evacuate the test stand to 20 microns vacuum (pressure measured at a vacuum pump) for 12 hours.

2. Weigh the test stand (TSO).

3. If this is the first recovery operation being performed for a compressor scenario (or if a recovery efficiency is to be calculated for each recovery event), then weigh all devices used in the recovery system to deliver recovered refrigerant to a container suitable for shipment or delivery to a refrigerant reclaimer. Weigh only devices that can retain refrigerant in a manner that it will ultimately be transferred to a shipping container without significant release to the atmosphere (RSO).

4. Weigh final shipping containers (SCO).

5. Charge the test stand with an appropriate CFC-12 charge (either 6 oz. or 9 oz.).

6. Run the test stand for four (4) hours with 100% run time.

7. Turn off the test stand for twelve (12) hours. During this period evaporate all condensation that has collected on the test stand during step 6.

8. Weigh the test stand (TSC).

9. Recover CFC-12 from the test stand and perform all operations needed to transfer the

recovered refrigerant to one of the shipping containers weighed in step 4. All recovery and transfer operations are to be performed in accordance with the operating instructions provided by the system's vendor. The compressor in the test stand is to remain “off” or be turned “on” during the recovery operation depending on whether the test is for a nonworking or working compressor performance evaluation. If a recovery efficiency is to be calculated for each recovery event, transfer the captured refrigerant to a shipping container and then skip to step 13. Otherwise continue. If the system allows for multiple recovery operations to be performed before transferring recovered refrigerant to a shipping container, the transfer operation can be delayed until either the maximum number of recovery operations allowed before a transfer is required have been performed, or the last of the five (5) recovery operations has been performed.

10. Perform any oil removal or oil addition operations needed to properly maintain the test stand and the devices used for recovery or transfer operations. Determine the net weight of the oil added or removed from the recovery device and/or transfer device. (OP1 for oil added, OP2 for oil removed).

11. Evacuate the test stand to 20 microns vacuum for 4 hours.

12. Return to step 2 unless five (5) recovery operations have been performed.

13. Weigh all final shipping containers that received recovered refrigerant (SCF).

14. Weigh the equipment weighed in step three (3) above (RSF). If a recovery efficiency is to be calculated for each recovery event, perform calculations and return to step one (1) for additional recoveries.

IV. CALCULATIONS

A. For Five (5) Consecutive Recoveries

Refrigerant Recoverable equals the summation of charged test stand weights minus original test stand weights.

$$\text{Refrigerant Recoverable} = \sum_{i=1}^5 (TSC_i - TSO_i)$$

Oil Loss equals the net weight of oil added to and removed from the recovery device and/or transfer device.

$$OL = \sum_{i=1}^5 (OP1_i - OP2_i)$$

Refrigerant Recovered equals the final weight of shipping containers minus the initial weight of final shipping containers, plus final recovery system weight, minus original

recovery system weight, plus the net value of all additions and removals of oil from the recovery and transfer devices.

$$\text{Refrigerant Recovered} = \left(\sum_{i=1}^n SCF_i - SCO_i \right) + RSF - RSO - OL$$

n = number of shipping containers used.

Recovery Efficiency equals Refrigerant Recovered divided by Refrigerant Recoverable times 100%.

$$\text{Recovery Efficiency} = \frac{\text{Refrigerant Recovered}}{\text{Refrigerant Recoverable}} 100\%$$

B. For Individual Recoveries

Refrigerant Recoverable equals the charged test stand weight minus the original test stand weight.

$$\text{Refrigerant Recoverable} = TSCO - TSO$$

Refrigerant Recovered equals the final weight of the shipping container minus the initial weight of the shipping container plus

the final weight of the recovery system minus the original recovery system weight.

$$\text{Refrigerant Recovered} = SCF - SCO + RSF - RSO$$

Recovery Efficiency equals Refrigerant Recovered divided by Refrigerant Recoverable times 100 percent.

$$\text{Recovery Efficiency} = \frac{\text{Refrigerant Recovered}}{\text{Refrigerant Recoverable}} 100\%$$

Environmental Protection Agency

Pt. 82, Subpt. F, App. D

C. Calculation of a Statistically Significant Number of Recoveries

$$N_{\text{add}} = ((t * sd) / (.10 * X))^2 - N$$

Where:

N_{add} = the number of additional samples required to achieve 90% confidence.

sd = Standard deviation, or $(X/(N-1))^2$

X = Sample average

N = Number of samples tested

Number of samples	t for 90% confidence
2	6.814
3	2.920
4	2.353
5	2.132
6	2.015
7	1.943
8	1.895
9	1.860
10	1.833

Procedure:

1. Compute N_{add} after completing two recoveries.
2. If $N_{\text{add}} > 0$, then run an additional test.
3. Re-compute N_{add} . Continue to test additional samples until $N_{\text{add}} < 0$.

V. TEST PROCEDURE APPROVAL AND CERTIFICATION

Each vendor of capture equipment for small appliances desiring certification will provide a representative model of its capture system and its recommended recovery procedures to an EPA approved third party laboratory for testing in accordance with this procedure. The third party laboratory will certify recovery systems that when tested in accordance with this procedure demonstrate a sufficient recovery efficiency to meet EPA regulatory requirements.

APPENDIX D TO SUBPART F OF PART 82—STANDARDS FOR BECOMING A CERTIFYING PROGRAM FOR TECHNICIANS

a. Test Preparation. Technicians must pass an EPA-approved test, provided by an EPA-approved certifying program to be certified as a Type I technician. Organizations providing Type I certification only may choose either an on-site format or a mail-in format similar to what is permitted under the MVACs program.

Technicians must pass a closed-book, proctored test, administered in a secure environment, by an EPA-approved certifying program to be certified as a Type II or Type III technician.

Technicians must pass a closed-book, proctored test (or series of tests), administered in a secure environment, by an EPA-approved certifying program to be certified as a Universal technician. Mail-in format Type I tests cannot be used toward a Universal certification.

Each certifying program must assemble tests by choosing a prescribed subset from the EPA test bank. EPA will have a test bank with more questions than are needed for an individual test, which will enable the certifying program to generate multiple tests in order to discourage cheating. Each test must include 25 questions drawn from Group 1 and 25 questions drawn from each relevant technical Group. Tests for Universal technicians will include 100 questions (25 from Group 1 and 25 from each relevant technical Group). Universal tests may be taken all at once, or by combining passing scores on separate Type I, Type II, and Type III tests. Questions should be divided in order to sufficiently cover each topic within the Group.

Certifying programs must provide a paper hand-out or electronic form of communication to technicians after they have completed their certification test that contains the following information:

- Which certifying program is providing the testing;
- Contact information for the certifying program;
- The name and contact information of the proctor; and
- When they should expect to receive their score and, if they passed, their certification card.

Each certifying program must show a method of randomly choosing which questions will be on the tests. Multiple versions of the test must be used during each testing event. Test answer sheets must include the name and address of the applicant, the name and address of the certifying program, and the date and location at which the test was administered.

Training material accompanying mail-in Type I tests must not include sample test questions mimicking the language of the certification test. All mail-in material will be subject to review by EPA.

Certifying programs may charge individuals reasonable fees for the administration of the tests. EPA will publish a list of all approved certifying programs.

b. Proctoring. A certifying program for Type I (if in-person), Type II, Type III, and Universal technicians must designate at least one proctor registered for every 50 people taking tests at the same time at a given site.

The certification test for Type I (if taken as part of a Universal certification), Type II, Type III, and Universal technicians is a closed-book exam. The proctors must ensure that the applicants for certification do not use any notes or training materials during testing. Desks or work space must be placed in a way that discourages cheating. The space and physical facilities are to be conducive to continuous surveillance by the proctors and monitors during testing.

The proctor may not receive any benefit from the outcome of the testing other than a fee for proctoring. Proctors cannot know in advance which questions are on the tests they are proctoring.

Proctors are required to verify the identity of individuals taking the test by examining photo identification. Acceptable forms of identification include but are not limited to drivers' licenses, government identification cards, passports, and military identification.

Certifying programs for Type I technicians using the mail-in format, must take sufficient measures at the test site to ensure that tests are completed honestly by each technician. Each test for Type I certification must provide a means of verifying the identification of the individual taking the test. Acceptable forms of identification include but are not limited to drivers' licenses and passports.

c. Test Security. A certifying program must demonstrate the ability to ensure the confidentiality and security of the test questions and answer keys through strict accountability procedures. An organization interested in developing a technician certification program will be required to describe these test security procedures to EPA.

After the completion of a test, proctors must collect all test forms, answer sheets, scratch paper and notes. These items are to be placed in a sealed envelope.

d. Test Content. All Type I, Type II and Type III, certification tests will include 25 questions from Group I and 25 questions from Group II. Universal certification tests will include 25 questions from Group I and 75 questions from Group II (with 25 from each of the three sector-specific areas).

Group I will ask questions in the following areas:

1. Environmental impact of CFCs, HCFCs, and substitute refrigerants
2. Laws and regulations
3. Changing industry outlook

Group II will ask questions covering sector-specific (*i.e.*, Type I, Type II, Type III) issues in the following areas:

4. Leak detection
5. Recovery Techniques
6. Safety
7. Shipping
8. Disposal

e. Grading. Tests must be graded objectively. Certifying programs must inform the applicant of their test results no later than 30 days from the date of the test. Type I certifying programs using the mail-in format must notify the applicants of their test results no later than 30 days from the date the certifying programs received the completed test and any required documentation.

The passing score for the closed-book Type I, Type II, Type III and Universal certification test is 70 percent. The passing score for Type I certification tests using the mail-in format is 84 percent.

f. Proof of Certification. Certifying programs must issue a standard wallet-sized identification card no later than 30 days from the date of the test. Type I certifying programs using mail-in formats must issue cards to certified technicians no later than 30 days from the date the certifying program receives the completed test and any required documentation.

Each wallet-sized identification card must include, at a minimum, the name of the certifying program including the date the certifying program received EPA approval, the name of the person certified, the type of certification, a unique number for the certified person that does not include a technician's social security number, and the following text:

[name of person] has successfully passed a [Type I, Type II, Type III and/or Universal—as appropriate] exam on how to responsibly handle refrigerants as required by EPA's National Recycling and Emissions Reduction Program.

g. Recordkeeping and Reporting Requirements. Certifying programs must maintain records of the names and addresses of all individuals taking the tests, the scores of all certification tests administered, and the dates and locations of all tests administered. These records must be maintained indefinitely, unless transferred to another certifying program or EPA.

EPA must receive an activity report from all approved certifying programs by every January 30 and July 30, which covers the previous six months of certifications. The first report must be submitted following the first full six-month period for which the program has been approved by EPA. This report includes the pass/fail rate. If the certifying program believes a test bank question needs to be modified, information about that question should also be included.

Approved certifying programs will receive a letter of approval from EPA. Each testing

center must display a copy of that letter at their place of business.

Approved technician certification programs that voluntarily plan to stop providing the certification test must forward all records required by this appendix and §82.161 to another program currently approved by EPA in accordance with this appendix and with §82.161. Approved technician certification programs that receive records of certified technicians from a program that no longer offers the certification test, and the program that is voluntarily withdrawing from being a technician certification program must inform EPA at the address listed in §82.160 within 30 days of receiving or transferring these records. The notification must include the name and address of the program to which the records have been transferred. If another currently approved program willing to accept the records cannot be located, these records must be submitted to EPA at the address listed at §82.160.

Technician certification programs that have had their certification revoked in accordance with §82.169 must forward all records required by this appendix and §82.161 to EPA at the address listed in §82.160. Failure to do so is a violation of 40 CFR part 82, subpart F.

h. Additional Requirements. EPA may periodically inspect testing sites to ensure compliance with EPA regulations. If testing center discrepancies are found, they must be corrected within a specified time period. If discrepancies are not corrected, EPA may suspend or revoke the certifying program's approval. The inspections will include but are not limited to a review of the certifying program's provisions for test security, the availability of space and facilities to conduct the administrative requirements and ensure the security of the tests, the availability of adequate testing facilities and spacing of the applicants during testing, a review of the proper procedures regarding accountability, and that there is no evidence of misconduct on the part of the certifying programs, their representatives and proctors, or the applicants for certification.

If the certifying programs offer training or provide review materials to the applicants, these endeavors are to be considered completely separate from the administration of the certification test.

[81 FR 82390, Nov. 18, 2016]

APPENDIX E TO SUBPART F OF PART 82— TEST PROCEDURE FOR LEAKS FROM CONTAINERS HOLDING TWO POUNDS OR LESS OF REFRIGERANT FOR USE IN AN MVAC

This appendix is based on the California Air Resources Board (CARB) standard *TP-503: Test Procedure for Leaks from Small Cans*

of Automotive Refrigerant, as amended on January 5, 2010; and CARB standard *BP-A1: Balance Protocol for Gravimetric Determination of Sample Weights using a Precision Balance*, as amended January 5, 2010.

SECTION 1. APPLICABILITY

This test procedure is used by manufacturers of containers holding two pounds or less of refrigerant for use in a motor vehicle air conditioner (MVAC) to determine the leakage rate of small containers of automotive refrigerant that are subject to the requirements of 40 CFR part 82, subpart F. Specifically, this test procedure will specify the equipment, procedures, and calculations to determine if a container holding two pounds or less of refrigerant for use in an MVAC complies with the leakage rate specified in §82.154(c)(2)(ii). All terms in this appendix will follow the definitions in §82.152 unless otherwise defined in this appendix.

All containers holding two pounds or less of refrigerant for use in an MVAC must comply with other applicable codes and regulations such as local, state, or Federal safety codes and regulations.

This test procedure involves the use of materials under pressure and operations and should only be used by or under the supervision of those familiar and experienced in the use of such materials and operations. Appropriate safety precautions should be observed at all times while performing this test procedure.

SECTION 2. PRINCIPLE AND SUMMARY OF TEST PROCEDURE

This procedure is used to determine the leakage rate of containers holding two pounds or less of refrigerant for use in an MVAC (small cans). Testing will involve subjecting both full and partially empty cans in both upright and inverted positions at two temperatures: 73 °F and 130 °F.

Thirty small cans are tested under each condition for a total of 240 small cans tested. Small cans are brought to temperature stability, weighed, then stored for 30 days under specified conditions of temperature, orientation, and state of fill, then re-weighed. Leakage rate (grams/year) is estimated by (weight loss in grams) x 365/(days duration). The leakage rate is then compared to a standard of 3.00 grams/year to determine if a given small can complies with the leakage rate specified in §82.154(c)(2)(ii).

SECTION 3. BIASES AND INTERFERENCES

3.1 Contaminants on the operator's hands can affect the weight of the small can and the ability of the small can to absorb moisture. To avoid contamination of the small can, the balance operator should wear gloves while handling the small cans.

3.2 Weight determinations can be interfered with by moisture condensing on the small can and by thermal currents generated by temperature differences between the small can and the room temperature. The small cans cool during discharge and could cause condensation. For these reasons, small cans must be equilibrated to balance room temperature for at least four hours before weighing.

3.3 Variations in the temperature, pressure, and humidity of the ambient air will cause variations in the buoyancy of the small can. These variations should typically be less than 25 mg for a small can. If the small can is not leaking at all, then the uncorrected weight changes will be within the range of 0 ± 25 mg, which is about ten percent of the 247 mg loss expected after thirty days for a can leaking at 3 g/yr. In that case buoyancy corrections can be omitted. If the absolute value of the uncorrected weight change exceeds 25 mg, then all calculations must be made using weights corrected for buoyancy based on the temperature, pressure, and humidity of the weighing room.

3.4 Some electronic balances are sensitive to the effects of small static charges. The small can should be placed directly on the balance pan, ensuring metal to metal contact. If the balance pan is not grounded, the small can and balance pan should be statically discharged before weighing.

SECTION 4. SENSITIVITY AND RANGE

The mass of a full small can could range from roughly 50 g to 1000 g depending on the container capacity. A top loading balance, capable of a maximum weight measurement of not less than 1,000 g and having a minimum readability of 0.001 g, reproducibility and linearity of ± 0.002 g, must be used to perform mass measurements.

SECTION 5. EQUIPMENT

5.1 A top loading balance that meets the requirements of Section 4 above.

5.2 A NIST traceable working standard mass for balance calibration. A NIST traceable working standard mass for a balance linearity check. A reference mass to serve as a “blank” small can.

5.3 An enclosure capable of controlling the internal air temperature from $73^{\circ}\text{F} \pm 5^{\circ}\text{F}$, and an enclosure capable of controlling the internal air temperature to $130^{\circ}\text{F} \pm 5^{\circ}\text{F}$.

5.4 A temperature instrument capable of measuring the internal temperature of the temperature conditioning enclosures and the balance room with a sensitivity of $\pm 2^{\circ}\text{F}$.

5.5 A barometric pressure instrument capable of measuring atmospheric pressure at the location of the balance to within ± 0.02 inches of mercury.

5.6 A relative humidity measuring instrument capable of measuring the relative hu-

midity (RH) at the location of the balance with a sensitivity of ± 2 percent RH.

5.7 A hose with appropriate fitting for dispensing refrigerant from the small can to a recovery machine.

5.8 A refrigerant recovery machine to collect the discharged refrigerant from small cans being tested.

SECTION 6. CALIBRATION PROCEDURES

6.1 Calibrations are applied to the balance and to the support equipment such as temperature, humidity, and pressure monitoring equipment. Procedures for calibration are not spelled out here. General calibration principals for the support equipment and the balance are described in Section 11, Quality Assurance/Quality Control. Detailed calibration procedures for measurements made using the balance are contained in Attachment A: “Balance Protocol for Gravimetric Determination of Sample Weights using a Precision Balance.”

SECTION 7. SMALL CAN PREPARATION

7.1 Receive a batch of 240 small cans of one design to be tested. These may include several SKUs from different manufacturers if the container and valve combination are the same.

7.2 Clean small cans with Alkanox solution or equivalent and dry with a lint free towel.

7.3 Confirm that the sample ID sticker on the small can matches the sample ID on the chain of custody forms.

7.4 Select a reference mass similar to the weight of a full small can. If multiple sets of similar sized small cans are being tested, only one reference mass is needed; it can be used with all sets. Store the reference mass in the balance area.

7.5 Evacuate the contents of one half of the small cans (120 cans) into the refrigerant recovery machine using normal DIY dispensing procedures until each small can is approximately half full.

7.6 Select a reference mass similar to the weight of the half-full small can. If multiple sets of similar size small cans are being tested, only one reference mass is needed; it can be used with all sets. Store the reference mass in the balance area.

SECTION 8. SMALL CAN WEIGHING

Weighing cans on the balance is done in accordance with Attachment A to this appendix. Attachment A describes how to conduct weight determinations including appropriate calibration and QC data. This section, “Small Can Weighing,” describes the overall process, not the details of how to use the balance.

Environmental Protection Agency

Pt. 82, Subpt. F, App. E

Initial Weights

8.1 Put on gloves. Check the small cans for contamination.

8.2 Place the 240 small cans into a location where they can equilibrate to balance room temperature. Record the small can test IDs and the equilibration start time on the Small Can Test Data Forms available on EPA's Web site in sets of thirty, one form for each of the eight test conditions.

8.3 Let cans equilibrate for at least four hours.

8.4 Weigh the set of 240 small cans and the reference weights using Attachment A and log the results to the Balance Weighing Log Form available on EPA's Web site.

8.5 Transfer data from the Balance Weighing Log Form to the Small Can Test Data Form in sets of 30, one set for each of the eight conditions to be tested.

Thirty-Day Soak

8.6 Place each set of 30 small cans into the appropriate orientation and temperature for soaking:

30 full small cans—73 °F, upright
30 full small cans—73 °F, inverted
30 full small cans—130 °F, upright
30 full small cans—130 °F, inverted
30 half-full small cans—73 °F, upright
30 half-full small cans—73 °F, inverted
30 half-full small cans—130 °F, upright
30 half-full small cans—130 °F, inverted

8.7 Soak the small cans for 30 days undisturbed.

Final Weighing

8.8 Place the 240 small cans into a location where they can equilibrate to balance room temperature.

8.9 Let the small cans equilibrate for at least four hours.

8.10 Weigh the set of 240 small cans, the reference weights, and any additional sets of small cans using Attachment A.

8.11 Transfer data from the Balance Weighing Log Form to the corresponding Small Can Test Data Forms.

SECTION 9. CALCULATIONS

Corrections for Buoyancy

The calculations in this section are described in terms of "weight." Mass is a property of the small can, whereas weight is a force due to the effects of buoyancy and gravity. Procedures for correcting the effect of buoyancy are given in Attachment B of this appendix. Ignoring buoyancy, *i.e.*, using weight data uncorrected for buoyancy effects, is acceptable for a thirty day test if the absolute magnitude of the weight change is less than 25 mg. If the uncorrected weight change exceeds 25 mg for any small can, then correct all small can weights for buoyancy

using the procedures in Attachment B before performing the calculations described below.

Calculation of Leak Rate

The emission rate in grams/day for each small can is calculated by subtracting the final weight from the initial weight and then dividing the weight difference by the time difference measured in days to the nearest hour (nearest 1/24 of a day). The emission rate in g/day is multiplied by 365 to determine emission rate in grams/yr. If the annual emission rate for any small can exceeds the entire small can contents, then the annual emission rate for that small can is adjusted to equal the entire small can contents/year (*e.g.*, about 350 g/yr for a 12 ounce small can). The annual emission rate for the purpose of the test is calculated by averaging the 240 individual adjusted annual emission rates and rounding to two decimal places. The cans fail the test if the adjusted annual emission rate averaged over 240 cans is greater than 3.00 g/yr. The calculations are described below.

Loss rate for each small can

$$Ei_{\text{daily}} = (Wi_{\text{final}} - Wi_{\text{initial}}) / (Di_{\text{final}} - Di_{\text{initial}}) \quad \text{g/day}$$

$$Ei_{\text{annual}} = 365 \times Ei_{\text{daily}} \quad \text{g/year}$$

$$Ei_{\text{adjusted}} = \text{Minimum of } (Ei_{\text{adjusted}}, Ci/\text{year}) \quad \text{g/yr}$$

Where,

Ei = emission rate

Wi_{final} = weight of can *i* after soaking (grams)

Wi_{initial} = weight of can *i* before soaking (grams)

Di_{final} = date/time of final weight measurements (days)

Di_{initial} = date/time of initial weight measurements (days)

Ci = original factory mass of refrigerant in can *i*

Note: Date/Times are measured in days. Microsoft Excel stores dates and times in days, and the calculations can be made directly in Excel. If calculations are made manually, calculate serial days to the nearest hour for each date and time as follows:

$$D = \text{Julday} + \text{Hour}/24$$

Where,

Julday = serial day of the year: Jan 1 = 1, Jan 31 = 31, Feb 1 = 32, etc.

Hour = hour of day using 24-hour clock, 0 to 23

Calculate the average loss rate for the 240 small cans as follows:

$$E_{\text{mean}} = [\text{Sum } (Ei_{\text{adjusted}}i), i = 1 \text{ to } 240] / 240$$

SECTION 10. RECORDKEEPING

During small can weighing, record the small can weights and date/times on the Balance Weighing Log Form. After each weighing session, transfer the measured weights and date/times from the Balance Weighing Log Form to the Small Can Test Data Form.

At the end of the test, complete the calculations described in Section 9, Calculations, and record the results on the Small Can Test Data Form.

SECTION 11. QUALITY ASSURANCE/QUALITY CONTROL

11.1 All temperature, pressure, and humidity instruments should be calibrated annually against NIST traceable laboratory standards. The main purpose of the NIST traceable calibration is to establish the absolute accuracy of the device. The instruments should also be checked periodically such as weekly, monthly, or quarterly against intermediate standards or against independent instruments. For example, a thermocouple can be checked weekly against a wall thermometer. A barometer or pressure gauge can be checked weekly by adjusting to sea level and comparing with local airport data. The main purpose of the frequent checks is to verify that the device has not failed in some way. This is especially important for electronic devices such as a digital thermometer, but even a liquid filled thermometer can develop a problem such as a bubble.

11.2 The balance should be serviced and calibrated annually by an independent balance service company or agency using NIST traceable reference masses. Servicing verifies accuracy and linearity, and the maintenance performed helps ensure that a malfunction does not develop.

11.3 The balance must also be calibrated and its linearity checked with working standards before and after each weighing session, or before and after each group of 24 small cans if more than 24 small cans are weighed in a session. Procedures for calibrating and using the balance, as well as recording balance data, are described in the accompanying balance weighing protocol. These procedures include zero checks, calibration checks, and reference mass checks. Procedures for calculating quality control data from those checks are described in Attachment A.

11.4 The small cans are cleaned then handled using gloves to prevent contamination. All equilibration and soaking must be done in a dust free area.

SECTION 12. BALANCE PROTOCOL FOR GRAVIMETRIC DETERMINATION OF SAMPLE WEIGHTS USING A PRECISION BALANCE

12.1 Scope and application

This Protocol summarizes a set of procedures and tolerances for weighing objects in the range of 0 to 1,000 g with a resolution of 0.001 g. This protocol only addresses balance operations, it does not address project requirements for equilibration, sample hold time limits, sample collection etc.

12.2 Summary of method

The balance is zeroed and calibrated using procedures defined herein. Object weight determinations are conducted along with control object weight determinations, zero checks, calibration checks, sensitivity checks, and replicate weightings in a defined sequence designed to control and quantitatively characterize precision and accuracy.

12.3 Definitions

N/A.

12.4 Interferences

Object weights can be affected by temperature and relative humidity of their environment, air currents, static electricity, gain and loss of water vapor, gain or loss of and loss of volatile compounds directly from the sample or from contaminants such as finger prints, marker ink, and adhesive tape.

Contamination, transfer of material to or from the samples, is controlled by conducting operations inside a clean area dedicated to the purpose and having a filtered laminar air flow where possible; by wearing gloves while handling all samples and related balance equipment; by using forceps to handle small objects, and by keeping the balance and all related equipment inside the clean area.

Air currents are controlled by conducting weighing operations inside a closed chamber or glove box and by allowing the substrates to reach temperature and relative humidity equilibrium. The chamber is maintained at 40 percent relative humidity and 25 °C by a continuous humidity and temperature control system. The temperature and RH conditions are recorded at least once per weighing sessions. Equilibration times for samples that are particularly sensitive to humidity or to loss of semi-volatiles species are specified by project requirements.

Static electric charges on the walls of the balance and the weighed objects, including samples, controls, and calibration weights, can significantly affect balance readings. Static is avoided by the operator ground himself and test objects as described in the balance manual.

12.5 Personnel health and safety

N/A

12.6 Equipment and supplies

- Filtered, temperature and humidity controlled weighing chamber.

- Precision Balance

- Plastic forceps

- Nylon fabric gloves.

- Working calibration weights: ANSI Class 2, 1000g and 500 g

- Working sensitivity weight: 50 mg

- Reference objects: references are one or more objects that are typical of the objects to be weighed during a project, but that are stored permanently inside the balance glove box. Reference objects are labeled Test1, Test2, Test3, etc.

12.7 Reagents and standard

Environmental Protection Agency

Pt. 82, Subpt. F, App. E

N/A

12.8 *Sample collection, preservation, and storage*

N/A. See relevant project requirements and SOPs.

12.9 *Quality control*

Data quality is controlled by specifying frequencies and tolerances for Zero, Calibration, Linearity, and Sensitivity checks. If checks do not meet tolerance criteria, then samples must be re-weighed. In addition, the procedures specify frequencies for Control Object Checks.

Data quality is quantitatively characterized using Zero Check, Calibration Check, and Control Check data. These data are summarized monthly in statistics and QC charts.

12.10 *Calibration and standardization*

The absolute accuracy of the balance is established by calibration against an ANSI Class 2, stainless steel working weight: 1000.000 g $\pm$ 0.0025 g. Linearity is established checking the midpoint against an ANSI Class 2 stainless steel working weight: 500.000 $\pm$ 0.0012 g. Sensitivity is established using and ANSI Class 2 stainless steel or aluminum working weight: 50 mg. Precision is checked by periodically checking zero, calibration, and reference object weights.

12.11 *Procedure*

12.11.1 *Overview of Weighing Sequence*

Weighing a series of substrates consists of performing the following procedures in sequence, while observing the procedures for handling and the procedures for reading the balance:

1. Initial Adjustment
2. Weigh eight samples
3. Zero Check
4. Weigh eight samples
5. Zero Check
6. Weigh eight samples
7. Calibration Check
8. Return to step 2.
9. If less than 24 cans are weighed, perform a final Calibration Check at the end of weighing.

This sequence is interrupted and samples are reweighed if QC check tolerances are not met. Each of these procedures along with procedures for handling and reading the balance are described below. The QC tolerances referred to in these procedures are listed in Table 1.

12.11.2 *Handling*

1. Never touch samples, weights, balance pans, etc. with bare hands. Wear powder free gloves to handle the weights, controls, and samples.

12.11.3 *Reading the Balance*

1. Close the door. Wait for the balance stabilization light to come on, and note the reading.

2. Watch the balance reading for 30 sec (use a clock). If the reading has not changed by more than 0.001 g from the reading noted in

step 1, then record the reading observed at the end of the 30 sec period.

3. If the reading has drifted more than 0.001 g note the new balance reading and go to step 2.

4. If the balance reading is flickering back and forth between two consecutive values choose the value that is displayed more often than the other.

5. If the balance reading is flickering equally back and forth between two consecutive values choose the higher value.

12.11.4 *Initial Adjustment*

1. Empty the sample pan. Close the door. Select Range 1000 g
2. Wait for a stable reading
3. Record the reading with QC code IZC (initial zero check)
4. Press the Tare button
5. Record the reading in the logbook with QC code IZA (initial zero adjust)
6. Place the 1,000 g working calibration weight on the balance pan
7. Wait for a stable reading.
8. Record the reading with QC code ICC (initial cal check)
9. Press the Calibrate button
10. Record the reading with QC code ICA (initial cal adjust)
11. Remove the calibration weight.
12. Wait for a stable reading.
13. Record the reading with QC code IZC.
14. If the zero reading exceeds $\pm$ 0.002 g, go to step 4.
15. Place the 500 g calibration weight on the balance pan
16. After a stable reading, record the reading with QC code C500. Do not adjust the balance.
17. Add the 0.050 g weight to 500 g weight on the balance pan.
18. After a stable reading, record the reading with QC code C0.05. Do not adjust the balance.
19. Weigh reference object TEST1, record reading with QC code T1.
20. Weigh the reference object TEST2, TEST3, etc. that is similar in weight to the samples that you will be weighing. Record with QC code T2, T3, etc.

12.11.5 *Zero Check*

1. Empty the sample pan. Close the door.
2. Wait for a stable reading
3. Record the reading with QC code ZC
4. If the ZC reading is less than or equal to the zero adjustment tolerance shown in Table 1, return to weighing and *do not adjust the zero*. If the ZC reading exceeded the zero adjustment tolerance, proceed with steps 5 through 7.
5. Press the Tare button
6. Record the reading in the logbook with QC code ZA.
7. If the ZC reading exceeded the zero reweigh tolerance, change the QC code recorded in step 3 from ZC to FZC. Then

enter a QC code of FZ into the QC code column of all samples weights obtained after the last valid zero check. Re-weigh all of those samples, recording new data in new rows of the logbook.

12.11.6 Calibration Check

1. First, follow procedures for Zero Check. If the ZC was within tolerance, tare the balance anyway (*i.e.*, follow steps 5 and 6 of the Zero Check method)
2. Place the 1,000 g working calibration weight on the sample pan, wait for a stable reading.
3. Record the reading with QC code C1000
4. If the C1000 reading is less than or equal to the calibration adjustment tolerances, skip steps 5 through 8 and proceed to step 9. *Do not adjust the calibration.*
5. If the C100 reading exceeded the calibration adjust tolerance, press the Calibrate button.
6. Record the reading in the logbook with QC code CA
7. Perform a Zero Check (follow the Zero Check method)
8. If the C1000 reading exceeded the calibration re-weigh tolerance, change the code recorded in step 3 from C1000 to FC1000. Enter FC into the QC column for all sample weights obtained after the last valid calibration check. Re-weigh all of those samples, recording new data in new rows of the logbook.

12.11.7 Replicate Weighing Check

1. This protocol does not include reweigh samples to obtain replicates. The projects for which this protocol is intended already include procedures multiple weightings of each sample.

TABLE 1—QC TOLERANCES AND FREQUENCIES FOR BALANCE PROTOCOL

Reading Tolerance:	
0.001 g, stable for 30 sec.	
Adjustment Tolerances:	
Zero:	–0.003 to +0.003 g.
Calibration:	999.997 to 1000.003 g.
Controls:	none.
Replicates:	none.
Re-weigh Tolerances:	
Zero:	–0.005 to +0.005 g.
Calibration:	999.995 to 1000.005 g.
Controls:	none.
Replicates:	none.
Reference Objects:	
Test 1—A reference object weighing about 400 g.	
Test 2—A reference object weighing about 200 g.	
Test 3—A reference object weighing about 700 g.	
QC Frequencies:	
Zero Checks:	once per 8 samples.

TABLE 1—QC TOLERANCES AND FREQUENCIES FOR BALANCE PROTOCOL—Continued

Calibration Checks:	once per 24 samples.
Repeat weighings:	none (test method includes replicate determinations).
Control objects:	once per weighing session.

12.12 Data analysis and calculations

For Zero Checks, let Z equal the recorded Zero Check value. For control checks let T1, T2, etc. equal the recorded value for control object Test 1, Test 2, etc. For Calibration Checks, let C1000 equal C1000 reading minus 1000, M = C500—500, S = .C.050—C500—.050. For Replicate Checks, let D equal the loss that occurred between the first and second measurements. In summary:

$$\begin{aligned} T1 &= T1 \\ T2 &= T2 \\ T3 &= T3 \\ Z &= ZC - 0 \\ C &= C1000 - 1000 \\ M &= C500 - 500 \\ G &= C050 - C500 - .050 \end{aligned}$$

Tabulate the mean and standard deviation for each of the following: Z, C, M, G, T1, T2, T3. Depending on the number of operators using the balance and the number of protocols in use, analyze the data by subcategories to determine the effects of balance operator and protocol. Each of these standard deviations, S_Z, S_C, etc. is an estimate of the precision of single weight measurement.

For Z, C, M, and G, check the mean value for statistical difference from 0. If the means are statistically different than zero, troubleshooting to eliminate bias may be called for. For Z, C, M, G, T1, T2, T3, check that the standard deviations are all comparable. If there are systematic differences, then troubleshooting to eliminate the problem may be called for.

Note that the precision of a weight gain, involves two weight determinations, and therefore is larger than S by a factor of sqrt(2). On the other hand replicate weighings improves the precision of the determinations by a factor of sqrt(N). If N = 2, *i.e.*, duplicates, then the factors cancel each other.

To estimate the overall uncertainty in a weight determination, a conservative estimate might be to combine the imprecision contributed by the zero with the imprecision contributed by the calibration.

$$U = \text{Sqrt}(S_z^2 + S_c^2)$$

The uncertainty in a weight gain from N replicates is then given by:

$$U_{\text{gain}} = \text{Sqrt}(2) \times \text{Sqrt}(S_z^2 + S_c^2) / \text{Sqrt}(N)$$

But due to the balance adjustment and re-weigh tolerances, we expect S_Z to approximately equal S_C, to approximately equal S_M, etc. tolerances, so that the equation above becomes:

$$U_{\text{gain}} = 2 \times S / \text{Sqrt}(N)$$

Environmental Protection Agency

Pt. 82, Subpt. F, App. E

Where S is any individual standard deviation; or better, a pooled standard deviation.

12.13 Method performance

The data necessary to characterize the accuracy and precision of this method are still being collected. The method is used primarily to weigh objects before and after a period of soaking to determine weight loss by subtraction. Given the reweigh tolerances, we expect that the precision of weight gain determinations will be on the order of 0.006 g at the 1-sigma level. Bias in the weight gain determination, due to inaccuracy of the calibration weight and to fixed non-linearity of the balance response is on the order 0.005 percent of the gain.

12.14 Pollution prevention

When discharging half the can contents during can preparation, do not vent the contents of the small can to the atmosphere. Use an automotive recovery machine to transfer small can content to a recovery cylinder.

12.15 Waste management

Dispose of the contents of the recycle cylinder through a service that consolidates waste for shipment to EPA certified facilities for reclaiming or destruction.

SECTION 13. COMPENSATION OF WEIGHT DATA FOR BUOYANCY AND GRAVITY EFFECTS

13.1 Gravity

Variations in gravity are important only when weighing objects under different gravitational fields, *i.e.*, at different locations or at different heights. Since the balance procedures calibrate the balance against a known mass (the calibration "weight") at the same location where sample objects are weighed, there is no need to correct for location. Although both the sample and the calibration weight are used at the same location, there will be a difference in the height of the center of gravity of the sample object (small can) and the center of gravity of the reference mass (calibration weight). However, this difference in height is maintained during both the initial weights and final weights, affecting the initial and final weights by the same amount, and affecting the scale of the weight difference by only a few ppm. In any event, the magnitude of this correction is on the order of 0.3 ug per kg per mm of height difference. A difference on the order of 100 mm would thus yield a weight difference of about 0.03 mg, which is insignificant compared to our balance resolution which is 0.001 g or 1 mg.

Based on the discussion above, no corrections for gravity are necessary when determining weight changes in small cans.

13.2 Buoyancy

Within a weighing session, the difference in density between the sample object and the calibration weight will cause the sample ob-

ject weight value to differ from its mass value due to buoyancy. For a 1-liter object in air at 20 °C and at 1 atm, the buoyant force is about 1.2 g. The volume of a 1 kg object with a density of 8 g/cm³ (*e.g.*, a calibration weight), is about 0.125 liters, and the buoyancy force is about 0.15 g. Variations in air density will affect both of these values in proportion. The net value being affected by variations in air density is thus on the order of 1.2 - 0.15 = 1.05 g. Air density can vary up or down by 2 percent or more due to variations in barometric pressure, temperature, and humidity. The buoyancy force will then vary up or down by 0.02 g, or 20 mg. This is significant compared to the weight change expected after one week for a can leaking at 3 grams per year, which is 57 mg.

Based on the discussion above, buoyancy corrections must be made.

Variables measured or calculated:

V_{can} = volume of can (cm³). Estimate to within 10 percent by measuring the can dimensions or by water displacement. Error in the can volume will cause an error in the absolute amount of the buoyancy force, but will have only a small effect on the change in buoyancy force from day to day.

W_{can} = nominal weight of a can (g), used to calculate the nominal density of the can.

ρ_{can} = nominal density of a small can (g/cm³). The nominal values can be applied to corrections for all cans. It is not necessary to calculate a more exact density for each can. Calculate once for a full can and once for a half full can as follows:

ρ_{can} = W_{can} / V_{can}

T = Temperature in balance chamber (degrees Celsius).

RH = Relative humidity in balance chamber (expressed a number between 0 and 100).

P_{baro} = Barometric pressure in balance chamber (millibar). Use actual pressure, NOT pressure adjusted to sea level.

ρ_{air} = density of air in the balance chamber (g/cm³). Calculate using the following approximation:

ρ_{air} = 0.001*[0.348444*P_{baro} - (RH/100) × (0.252 × T - 2.0582)]/(T + 273.15)

ρ_{ref} = the reference density of the calibration weight (g/cm³). Should be 8.0 g/cm³.

Equation to correct for buoyancy: W_{corrected} = W_{reading} × (1 - ρ_{air}/ρ_{ref})/(1 - ρ_{air}/ρ_{can})

[81 FR 82392, Nov. 18, 2016]

Subpart G—Significant New Alternatives Policy Program

SOURCE: 59 FR 13147, Mar. 18, 1994, unless otherwise noted.

§ 82.170 Purpose and scope.

(a) The purpose of these regulations in this subpart is to implement section 612 of the Clean Air Act, as amended, regarding the safe alternatives policy on the acceptability of substitutes for ozone-depleting compounds. This program will henceforth be referred to as the “Significant New Alternatives Policy” (SNAP) program. The objectives of this program are to identify substitutes for ozone-depleting compounds, to evaluate the acceptability of those substitutes, to promote the use of those substitutes believed to present lower overall risks to human health and the environment, relative to the class I and class II compounds being replaced, as well as to other substitutes for the same end-use, and to prohibit the use of those substitutes found, based on the same comparisons, to increase overall risks.

(b) The regulations in this subpart describe persons and substitutes subject to reporting requirements under the SNAP program and explain preparation and submission of notices and petitions on substitutes. The regulations also establish Agency procedures for reviewing and processing EPA’s determinations regarding notices and petitions on substitutes. Finally, the regulations prohibit the use of alternatives which EPA has determined may have adverse effects on human health or the environment where EPA has identified alternatives in particular industrial use sectors that on an overall basis, reduce risk to human health and the environment and are currently or potentially available. EPA will only prohibit substitutes where it has identified other substitutes for a specific application that are acceptable and are currently or potentially available.

(c) Notifications, petitions and other materials requested shall be sent to: SNAP Document Control Officer, U.S. Environmental Protection Agency (6205–J), 1200 Pennsylvania Ave., NW., Washington, DC 20460.

§ 82.172 Definitions.

Act means the Clean Air Act, as amended, 42 U.S.C. 7401 *et seq.*

Agency means the U.S. Environmental Protection Agency.

Application means a specific use within a major industrial sector end-use.

Class I or class II means the specific ozone-depleting compounds described in section 602 of the Act.

Decision means any final determination made by the Agency under section 612 of the Act on the acceptability or unacceptability of a substitute for a class I or II compound.

EPA means the U.S. Environmental Protection Agency.

End-use means processes or classes of specific applications within major industrial sectors where a substitute is used to replace an ozone-depleting substance.

Formulator means any person engaged in the preparation or formulation of a substitute, after chemical manufacture of the substitute or its components, for distribution or use in commerce.

Health and safety study or study means any study of any effect of a substitute or its components on health and safety, or the environment or both, including underlying data and epidemiological studies, studies of occupational, ambient, and consumer exposure to a substitute, toxicological, clinical, and ecological, or other studies of a substitute and its components, and any other pertinent test. Chemical identity is always part of a health and safety study. Information which arises as a result of a formal, disciplined study is included in the definition. Also included is information relating to the effects of a substitute or its components on health or the environment. Any available data that bear on the effects of a substitute or its components on health or the environment would be included. Examples include:

(1) Long- and short-term tests of mutagenicity, carcinogenicity, or teratogenicity; data on behavioral disorders; dermatotoxicity; pharmacological effects; mammalian absorption, distribution, metabolism, and excretion; cumulative, additive, and synergistic effects; acute, subchronic, and chronic effects; and structure/activity analyses;

(2) Tests for ecological or other environmental effects on invertebrates, fish, or other animals, and plants, including: Acute toxicity tests, chronic toxicity tests, critical life stage tests,

behavioral tests, algal growth tests, seed germination tests, microbial function tests, bioconcentration or bioaccumulation tests, and model ecosystem (microcosm) studies;

(3) Assessments of human and environmental exposure, including workplace exposure, and effects of a particular substitute on the environment, including surveys, tests, and studies of: Biological, photochemical, and chemical degradation; air, water and soil transport; biomagnification and bioconcentration; and chemical and physical properties, e.g., atmospheric lifetime, boiling point, vapor pressure, evaporation rates from soil and water, octanol/water partition coefficient, and water solubility;

(4) Monitoring data, when they have been aggregated and analyzed to measure the exposure of humans or the environment to a substitute; and

(5) Any assessments of risk to health or the environment resulting from the manufacture, processing, distribution in commerce, use, or disposal of the substitute or its components.

Importer means any person who imports a chemical substitute into the United States. *Importer* includes the person primarily liable for the payment of any duties on the merchandise or an authorized agent acting on his or her behalf. The term also includes, as appropriate:

- (1) The consignee;
- (2) The importer of record;
- (3) The actual owner; and
- (4) The transferee, if the right to draw merchandise in a bonded warehouse has been transferred.

Major Industrial Use Sector or Sector means an industrial category which EPA has reviewed under the SNAP program with historically high consumption patterns of ozone-depleting substances, including: Refrigeration and air conditioning; foam-blowing; fire suppression and explosion protection; solvents cleaning; aerosols; sterilants; tobacco expansion; pesticides; and adhesives, coatings and inks sectors.

Manufacturer means any person engaged in the direct manufacture of a substitute.

Mixture means any mixture or blend of two or more compounds.

Person includes an individual, corporation, partnership, association, state, municipality, political subdivision of a state, and any agency, department, or instrumentality of the United States and any officer, agent, or employee of such entities.

Pesticide has the meaning contained in the Federal Insecticide, Fungicide, and Rodenticide Act, 7 U.S.C. 136 *et seq.* and the regulations issued under it.

Potentially available is defined as any alternative for which adequate health, safety, and environmental data, as required for the SNAP notification process, exist to make a determination of acceptability, and which the Agency reasonably believes to be technically feasible, even if not all testing has yet been completed and the alternative is not yet produced or sold.

Premanufacture Notice (PMN) Program has the meaning described in 40 CFR part 720, subpart A promulgated under the Toxic Substances Control Act, 15 U.S.C. 2601 *et seq.*

Producer means any person who manufactures, formulates or otherwise creates a substitute in its final form for distribution or use in interstate commerce.

Research and development means quantities of a substitute manufactured, imported, or processed or proposed to be manufactured, imported, or processed solely for research and development.

Residential use means use by a private individual of a chemical substance or any product containing the chemical substance in or around a permanent or temporary household, during recreation, or for any personal use or enjoyment. Use within a household for commercial or medical applications is not included in this definition, nor is use in automobiles, watercraft, or aircraft.

Significant new use means use of a new or existing substitute in a major industrial use sector as a result of the phaseout of ozone-depleting compounds.

Small uses means any use of a substitute in a sector other than a major industrial use sector, or production by any producer for use of a substitute in a major industrial sector of 10,000 lbs. or less per year.

§ 82.174

Substitute or alternative means any chemical, product substitute, or alternative manufacturing process, whether existing or new, intended for use as a replacement for a class I or II compound.

Test marketing means the distribution in interstate commerce of a substitute to no more than a limited, defined number of potential customers to explore market viability in a competitive situation. Testing must be restricted to a defined testing period before the broader distribution of that substitute in interstate commerce.

Use means any use of a substitute for a Class I or Class II ozone-depleting compound, including but not limited to use in a manufacturing process or product, in consumption by the end-user, or in intermediate uses, such as formulation or packaging for other subsequent uses.

Use restrictions means restrictions on the use of a substitute imposing either conditions on how the substitute can be used across a sector end-use or limits on the end-uses or specific applications where it can be used within a sector.

§ 82.174 Prohibitions.

(a) No person may introduce a new substitute into interstate commerce before the expiration of 90 days after a notice is initially submitted to EPA under § 82.176(a).

(b) No person may use a substitute which a person knows or has reason to know was manufactured, processed or imported in violation of the regulations in this subpart, or knows or has reason to know was manufactured, processed or imported in violation of any use restriction in the acceptability determination, after the effective date of any rulemaking imposing such restrictions.

(c) No person may use a substitute without adhering to any use restrictions set by the acceptability decision, after the effective date of any rulemaking imposing such restrictions.

(d) No person may use a substitute after the effective date of any rulemaking adding such substitute to the list of unacceptable substitutes.

(e) *Rules Stayed for Reconsideration.* Notwithstanding any other provision of

40 CFR Ch. I (7-1-24 Edition)

this subpart, the effectiveness of subpart G is stayed from December 8, 1994, to March 8, 1995, only as applied to use of substitutes for export.

[59 FR 13147, Mar. 18, 1994, as amended at 59 FR 63256, Dec. 8, 1994; 60 FR 3303, Jan. 13, 1995]

§ 82.176 Applicability.

(a) Any producer of a new substitute must submit a notice of intent to introduce a substitute into interstate commerce 90 days prior to such introduction. Any producer of an existing substitute already in interstate commerce must submit a notice as of July 18, 1994, if such substitute has not already been reviewed and approved by the Agency.

(b) With respect to the following substitutes, producers are exempt from notification requirements:

(1) *Substitutes already listed as acceptable.* Producers need not submit notices on substitutes that are already listed as acceptable under SNAP.

(2) *Small sectors.* Persons using substitutes in sectors other than the nine principal sectors reviewed under this program are exempt from the notification requirements. This exemption shall not be construed to nullify an unacceptability determination or to allow use of an otherwise unacceptable substitute.

(3) *Small volume use within SNAP sectors.* Within the nine principal SNAP sectors, persons introducing a substitute whose expected volume of use amounts to less than 10,000 lbs. per year within a SNAP sector are exempt from notification requirements. This exemption shall not be construed to allow use of an otherwise unacceptable substitute in any quantity. Persons taking advantage of this exemption for small uses must maintain documentation for each substitute describing how the substitute meets this small use definition. This documentation must include annual production and sales information by sector.

(4) *Research and development.* Production of substitutes for the sole purpose of research and development is exempt from reporting requirements.

(5) *Test marketing.* Use of substitutes for the sole purpose of test marketing

is exempt from SNAP notification requirements until 90 days prior to the introduction of such substitutes for full-scale commercial sale in interstate commerce. Persons taking advantage of this exemption are, however, required to notify the Agency in writing that they are conducting test marketing 30 days prior to the commencement of such marketing. Notification shall include the name of the substitute, the volume used in the test marketing, intended sector end-uses, and expected duration of the test marketing period.

(6) *Formulation changes.* In cases where replacement of class I or II compounds causes formulators to change other components in a product, formulators are exempt from reporting with respect to these auxiliary formulation changes. However, the SNAP submitter is required to notify the Agency if such changes are expected to significantly increase the environmental and human health risk associated with the use of any class I or class II substitute.

(7) *Substitutes used as feedstocks.* Producers of substitutes used as feedstocks which are largely or entirely consumed, transformed or destroyed in the manufacturing or use process are exempt from reporting requirements concerning such substitutes.

(c) Use of a substitute in the possession of an end-user as of March 18, 1994, listed as unacceptable or acceptable subject to narrowed use limits may continue until the individual end-users' existing supply, as of that date, of the substitute is exhausted. Use of substitutes purchased after March 18, 1994, is not permitted subsequent to April 18, 1994.

§ 82.178 Information required to be submitted.

(a) Persons whose substitutes are subject to reporting requirements pursuant to § 82.176 must provide the following information:

(1) *Name and description of the substitute.* The substitute should be identified by its: Chemical name; trade name(s); identification numbers; chemical formula; and chemical structure.

(2) *Physical and chemical information.* The substitute should be characterized by its key properties including but not

limited to: Molecular weight; physical state; melting point; boiling point; density; taste and/or odor threshold; solubility; partition coefficients (Log K_{ow} , Log K_{oc}); atmospheric lifetime and vapor pressure.

(3) *Substitute applications.* Identification of the applications within each sector end-use in which the substitutes are likely to be used.

(4) *Process description.* For each application identified, descriptive data on processing, including in-place pollution controls.

(5) *Ozone depletion potential.* The predicted 100-year ozone depletion potential (ODP) of substitute chemicals. The submitter must also provide supporting documentation or references.

(6) *Global warming impacts.* Data on the total global warming potential of the substitute, including information on the GWP index and the indirect contributions to global warming caused by the production or use of the substitute (e.g., changes in energy efficiency). GWP must be calculated over a 100, 500 and 1000-year integrated time horizon.

(7) *Toxicity data.* Health and safety studies on the effects of a substitute, its components, its impurities, and its degradation products on any organism (e.g., humans, mammals, fish, wildlife, and plants). For tests on mammals, the Agency requires a minimum submission of the following tests to characterize substitute risks: A range-finding study that considers the appropriate exposure pathway for the specific use (e.g., oral ingestion, inhalation, etc.), and a 90-day subchronic repeated dose study in an appropriate rodent species. For certain substitutes, a cardiotoxicity study is also required. Additional mammalian toxicity tests may be identified based on the substitute and application in question. To sufficiently characterize aquatic toxicity concerns, both acute and chronic toxicity data for a variety of species are required. For this purpose, the Agency requires a minimum data set as described in "Guidelines for Deriving Numerical National Water Quality Criteria for the Protection of Aquatic Organisms and their Uses," which is available through the National Technical Information Service (#PB 85-227049). Other relevant information and

data summaries, such as the Material Safety Data Sheets (MSDS), should also be submitted. To assist in locating any studies previously submitted to EPA and referred to, but not included in a SNAP submission, the submitter must provide citations for the date, type of submission, and EPA Office to which they were submitted, to help EPA locate these quickly.

(8) *Environmental fate and transport.* Where available, information must be submitted on the environmental fate and transport of substitutes. Such data shall include information on bioaccumulation, biodegradation, adsorption, volatility, transformation, and other data necessary to characterize movement and reaction of substitutes in the environment.

(9) *Flammability.* Data on the flammability of a substitute chemical or mixture are required. Specifically, the flash point and flammability limits are needed, as well as information on the procedures used for determining the flammability limits. Testing of blends should identify the compositions for which the blend itself is flammable and include fractionation data on changes in the composition of the blend during various leak scenarios. For substitutes that will be used in consumer applications, documentation of testing results conducted by independent laboratories should be submitted, where available. If a substitute is flammable, the submitter must analyze the risk of fire resulting from the use of such a substitute and assess the effectiveness of measures to minimize such risk.

(10) *Exposure data.* Available modeling or monitoring data on exposures associated with the manufacture, formulation, transport, use and disposal of a substitute. Descriptive process information for each substitute application, as described above, will be used to develop exposure estimates where exposure data are not readily available. Depending on the application, exposure profiles may be needed for workers, consumers, and the general population.

(11) *Environmental release data.* Data on emissions from the substitute application and equipment, as well as on pollutant releases or discharge to all environmental media. Submitters should provide information on release

locations, and data on the quantities, including volume, of anticipated waste associated with the use of the substitute. In addition, information on anticipated waste management practices associated with the use of the substitute. Any available information on any pollution controls used or that could be used in association with the substitute (e.g., emissions reduction technologies, wastewater treatment, treatment of hazardous waste) and the costs of such technology must also be submitted.

(12) *Replacement ratio for a chemical substitute.* Information on the replacement ratio for a chemical substitute versus the class I or II substances being replaced. The term “replacement ratio” means how much of a substitute must be used to replace a given quantity of the class I or II substance being replaced.

(13) *Required changes in use technology.* Detail on the changes in technology needed to use the alternative. Such information should include a description of whether the substitute can be used in existing equipment—with or without some retrofit—or only in new equipment. Data on the cost (capital and operating expenditures) and estimated life of any technology modifications should also be submitted.

(14) *Cost of substitute.* Data on the expected average cost of the alternative. In addition, information is needed on the expected equipment lifetime for an alternative technology. Other critical cost considerations should be identified, as appropriate.

(15) *Availability of substitute.* If the substitute is not currently available, the timing of availability of a substitute should be provided.

(16) *Anticipated market share.* Data on the anticipated near-term and long-term nationwide substitute sales.

(17) *Applicable regulations under other environmental statutes.* Information on whether the substitute is regulated under other statutory authorities, in particular the Clean Water Act, Safe Drinking Water Act, the Resource Conservation and Recovery Act, the Federal Insecticide, Fungicide, and Rodenticide Act, the Toxic Substances Control Act, the Comprehensive Environmental Response, Compensation

Environmental Protection Agency

§ 82.180

and Liability Act, the Emergency Planning and Community Right-to-Know Act, or other titles under the Clean Air Act.

(18) *Information already submitted to the Agency.* Information requested in the SNAP program notice that has been previously submitted to the Agency as part of past regulatory and information-gathering activities may be referenced rather than resubmitted. Submitters who cannot provide accurate references to data sent previously to the Agency should include all requested information in the SNAP notice.

(19) *Information already available in the literature.* If any of the data needed to complete the SNAP program notice are available in the public literature, complete references for such information should be provided.

(b) The Significant New Alternatives Policy (SNAP) Information Notice is designed to provide the Agency with the information necessary to reach a decision on the acceptability of a substitute.

(1) Submitters requesting review under the SNAP program should send the completed SNAP notice to: SNAP Document Control Officer, U.S. Environmental Protection Agency (6205-J), 1200 Pennsylvania Ave., NW., Washington, DC 20460.

(2) Submitters filing jointly under SNAP and the Premanufacture Notice Program (PMN) should send the SNAP addendum along with the PMN form to: PMN Document Control Officer, U.S. Environmental Protection Agency (7407), 1200 Pennsylvania Ave., NW., Washington, DC 20460. Submitters must also send both documents to the SNAP program, with a reference to indicate the notice has been furnished to the Agency under the PMN program. Submitters providing information on new chemicals for joint review under the TSCA and SNAP programs may be required to supply additional toxicity data under TSCA section 5.

(3) Submitters filing jointly under SNAP and under the Federal Insecticide, Fungicide, and Rodenticide Act should send the SNAP form to the Office of Pesticide Programs, Registration Division, (7505C) 1200 Pennsylvania Ave., NW., Washington, DC 20460, as

well as to the SNAP Document Control Officer.

§ 82.180 Agency review of SNAP submissions.

(a) *Processing of SNAP notices*—(1) *90-day review process.* The 90-day review process will begin once EPA receives a submission and determines that such submission includes data on the substitute that are complete and adequate, as described in § 82.178. The Agency may suspend or extend the review period to allow for submission of additional data needed to complete the review of the notice.

(2) *Initial review of notice.* The SNAP Document Control Officer will review the notice to ensure that basic information necessary to process the submission is present (i.e., name of company, identification of substitute, etc.). The SNAP Document Control Officer will also review substantiation of any claim of confidentiality.

(3) *Determination of data adequacy.* Upon receipt of the SNAP submission, the Agency will review the completeness of the information supporting the application. If additional data are needed, the submitter will be contacted following completion of this review. The 90-day review period will not commence until EPA has received data it judges adequate to support analysis of the submission.

(4) *Letter of receipt.* The SNAP Document Control Officer will send a letter of receipt to the submitter to confirm the date of notification and the beginning of EPA's 90-day review period. The SNAP Document Control Officer will also assign the SNAP notice a tracking number, which will be identified in the letter of receipt.

(5) *Availability of new information during review period.* If critical new information becomes available during the review period that may influence the Agency's evaluation of a substitute, the submitter must notify the Agency about the existence of such information within 10 days of learning of such data. The submitter must also inform the Agency of new studies underway, even if the results will not be available within the 90-day review period. The Agency may contact the submitter to

explore extending or suspending the review period depending on the type of information received and the stage of review.

(6) *Completion of detailed review.* Once the initial data review, described in paragraphs (a)(2) and (3) of this section, has been completed, the Agency will complete a detailed evaluation of the notice. If during any time the Agency perceives a lack of information necessary to reach a SNAP determination, it will contact the submitter and request the missing data.

(7) *Criteria for review.* To determine whether a substitute is acceptable or unacceptable as a replacement for class I or II compounds, the Agency will evaluate:

- (i) Atmospheric effects and related health and environmental impacts;
- (ii) General population risks from ambient exposure to compounds with direct toxicity and to increased ground-level ozone;
- (iii) Ecosystem risks;
- (iv) Occupational risks;
- (v) Consumer risks;
- (vi) Flammability; and
- (vii) Cost and availability of the substitute.

(8) *Communication of decision*—(i) *Communication of decision to the submitter.* Once the SNAP program review has been completed, the Agency will notify the submitter in writing of the decision. Sale or manufacture of new substitutes may commence after the initial 90-day notification period expires even if the Agency fails to reach a decision within the 90-day review period or fails to communicate that decision or the need for additional data to the submitter. Sale or manufacture of existing substitutes may continue throughout the Agency's 90-day review.

(ii) *Communication of decision to the public.* The Agency will publish in the FEDERAL REGISTER periodic updates to the list of the acceptable and unacceptable alternatives that have been reviewed to date. In the case of substitutes proposed as acceptable with use restrictions, proposed as unacceptable or proposed for removal from either list, a rulemaking process will ensue. Upon completion of such rulemaking, EPA will publish revised lists of substitutes acceptable subject to use

conditions or narrowed use limits and unacceptable substitutes to be incorporated into the Code of Federal Regulations. (See Appendices to this subpart.)

(b) *Types of listing decisions.* When reviewing substitutes, the Agency will list substitutes in one of five categories:

(1) *Acceptable.* Where the Agency has reviewed a substitute and found no reason to prohibit its use, it will list the alternative as acceptable for the end-uses listed in the notice.

(2) *Acceptable subject to use conditions.* After reviewing a notice, the Agency may make a determination that a substitute is acceptable only if conditions of use are met to minimize risks to human health and the environment. Where users intending to adopt a substitute acceptable subject to use conditions must make reasonable efforts to ascertain that other alternatives are not feasible due to safety, performance or technical reasons, documentation of this assessment must be retained on file for the purpose of demonstrating compliance. This documentation shall include descriptions of substitutes examined and rejected, processes or products in which the substitute is needed, reason for rejection of other alternatives, e.g., performance, technical or safety standards. Use of such substitutes in ways that are inconsistent with such use conditions renders them unacceptable.

(3) *Acceptable subject to narrowed use limits.* Even though the Agency can restrict the use of a substitute based on the potential for adverse effects, it may be necessary to permit a narrowed range of use within a sector end-use because of the lack of alternatives for specialized applications. Users intending to adopt a substitute acceptable with narrowed use limits must ascertain that other alternatives are not technically feasible. Companies must document the results of their evaluation, and retain the results on file for the purpose of demonstrating compliance. This documentation shall include descriptions of substitutes examined and rejected, processes or products in which the substitute is needed, reason for rejection of other alternatives, e.g.,

performance, technical or safety standards, and the anticipated date other substitutes will be available and projected time for switching to other available substitutes. Use of such substitutes in applications and end-uses which are not specified as acceptable in the narrowed use limit renders them unacceptable.

(4) *Unacceptable*. This designation will apply to substitutes where the Agency's review indicates that the substitute poses risk of adverse effects to human health and the environment and that other alternatives exist that reduce overall risk.

(5) *Pending*. Submissions for which the Agency has not reached a determination will be described as pending. For all substitutes in this category, the Agency will work with the submitter to obtain any missing information and to determine a schedule for providing the missing information if the Agency wishes to extend the 90-day review period. EPA will use the authority under section 114 of the Clean Air Act to gather this information, if necessary. In some instances, the Agency may also explore using additional statutory provisions (e.g., section 5 of TSCA) to collect the needed data.

(c) *Joint processing under SNAP and TSCA*. The Agency will coordinate reviews of substitutes submitted for evaluation under both the TSCA PMN program and the CAA.

(d) *Joint processing under SNAP and FIFRA*. The Agency will coordinate reviews of substitutes submitted for evaluation under both FIFRA and the CAA.

[59 FR 13147, Mar. 18, 1994, as amended at 61 FR 25592, May 22, 1996; 61 FR 54039, Oct. 16, 1996]

§ 82.182 Confidentiality of data.

(a) *Clean Air Act provisions*. Anyone submitting information must assert a claim of confidentiality at the time of submission for any data they wish to have treated as confidential business information (CBI) under 40 CFR part 2, subpart B. Failure to assert a claim of confidentiality at the time of submission may result in disclosure of the information by the Agency without further notice to the submitter. The submitter should also be aware that under

section 114(c), emissions data may not be claimed as confidential.

(b) *Substantiation of confidentiality claims*. At the time of submission, EPA requires substantiation of any confidentiality claims made. Failure to provide any substantiation may result in disclosure of information without further notice by the Agency. All submissions must include adequate substantiation in order for an acceptability determination on a substitute to be published. Moreover, under 40 CFR part 2, subpart B, there are further instances in which confidentiality assertions may later be reviewed even when confidentiality claims are initially received. The submitter will also be contacted as part of such an evaluation process.

(c) *Confidentiality provisions for toxicity data*. In the event that toxicity or health and safety studies are listed as confidential, this information cannot be maintained as confidential where such data are also submitted under TSCA or FIFRA, to the extent that confidential treatment is prohibited under those statutes. However, information contained in a toxicity study that is not health and safety data and is not relevant to the effects of a substance on human health and the environment (e.g., discussion of process information, proprietary blends) can be maintained as confidential subject to 40 CFR part 2, subpart B.

(d) *Joint submissions under other statutes*. Information submitted as part of a joint submission to either SNAP/TSCA or SNAP/FIFRA must adhere to the security provisions of the program offices implementing these statutes. For such submissions, the SNAP handling of such notices will follow the security provisions under these statutes.

§ 82.184 Petitions.

(a) *Who may petition*. Any person may petition the Agency to amend existing listing decisions under the SNAP program, or to add a new substance to any of the SNAP lists.

(b) *Types of petitions*. Five types of petitions exist:

(1) Petitions to add a substitute not previously reviewed under the SNAP program to the acceptable list. This type of petition is comparable to the

90-day notifications, except that it would generally be initiated by entities other than the companies that manufacture, formulate, or otherwise use the substitute. Companies that manufacture, formulate, or use substitutes that want to have their substitutes added to the acceptable list should submit information on the substitute under the 90-day review program;

(2) Petitions to add a substitute not previously reviewed under the SNAP program to the unacceptable list;

(3) Petitions to delete a substitute from the acceptable list and add it to the unacceptable list or to delete a substitute from the unacceptable and add it to the acceptable list;

(4) Petitions to add or delete use restrictions on an acceptability listing.

(5) Petitions to grandfather use of a substitute listed as unacceptable or acceptable subject to use restrictions.

(c) *Content of the petition.* The Agency requires that the petitioner submit information on the type of action requested and the rationale for the petition. Petitions in paragraphs (b)(1) and (2) of this section must contain the information described in § 82.178, which lists the items to be submitted in a 90-day notification. For petitions that request the re-examination of a substitute previously reviewed under the SNAP program, the submitter must also reference the prior submittal or existing listing. Petitions to grandfather use of an unacceptable substitute must describe the applicability of the test to judge the appropriateness of Agency grandfathering as established by the United States District Court for the District of Columbia Circuit (see *Sierra Club v. EPA*, 719 F.2d 436 (D.C. Cir. 1983)). This test includes whether the new rule represents an abrupt departure from previously established practice, the extent to which a party relied on the previous rule, the degree of burden which application of the new rule would impose on the party, and the statutory interest in applying the new rule immediately.

(d) *Petition process.* (1) Notification of affected companies. If the petition con-

cerns a substitute previously either approved or restricted under the SNAP program, the Agency will contact the original submitter of that substitute.

(2) *Review for data adequacy.* The Agency will review the petition for adequacy of data. As with a 90-day notice, the Agency may suspend review until the petitioner submits the information necessary to evaluate the petition. To reach a timely decision on substitutes, EPA may use collection authorities such as those contained in section 114 of the Clean Air Act as amended, as well as information collection provisions of other environmental statutes.

(3) *Review procedures.* To evaluate the petition, the Agency may submit the petition for review to appropriate experts inside and outside the Agency.

(4) *Timing of determinations.* If data are adequate, as described in § 82.180, the Agency will respond to the petition within 90 days of receiving a complete petition. If the petition is inadequately supported, the Agency will query the petitioner to fill any data gaps before the 90-day review period begins, or may deny the petition because data are inadequate.

(5) *Rulemaking procedures.* EPA will initiate rulemaking whenever EPA grants a petition to add a substance to the list of unacceptable substitutes, remove a substance from any list, or change or create an acceptable listing by imposing or deleting use conditions or use limits.

(6) *Communication of decision.* The Agency will inform petitioners within 90 days of receiving a complete petition whether their request has been granted or denied. If a petition is denied, the Agency will publish in the FEDERAL REGISTER an explanation of the determination. If a petition is granted, the Agency will publish the revised SNAP list incorporating the final petition decision within 6 months of reaching a determination or in the next scheduled update, if sooner, provided any required rulemaking has been completed within the shorter period.

APPENDIX A TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE
RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES

REFRIGERANTS
Unacceptable Substitutes

End-use	Substitute	Decision	Comments
CFC-11 centrifugal chillers (retrofit).	HCFC-141b	Unacceptable	Has a high ODP relative to other alternatives.
CFC-12 centrifugal chillers (retrofit).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-11, CFC-12, CFC-113, CFC-114, R-500 centrifugal chillers (new equipment/NIKS).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12 reciprocating chillers (retrofit).	HCFC-141b	Unacceptable	Has a high ODP relative to other alternatives.
	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12 reciprocating chillers (new equipment/NIKS).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-11, CFC-12, R-502 industrial process refrigeration (retrofit).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
CFC-11, CFC-12, R-502 industrial process refrigeration (new equipment/NIKS).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
CFC-12, R-502 ice skating rinks (retrofit).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, R-502 ice skating rinks (new equipment/NIKS).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, R-502 cold storage warehouses (retrofit).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, R-502 cold storage warehouses (new equipment/NIKS).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, R-500, R-502 refrigerated transport (retrofit).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.

REFRIGERANTS—Continued
Unacceptable Substitutes

End-use	Substitute	Decision	Comments
CFC-12, R-500, R-502 re- frigerated transport (new equipment/NIKs).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II sub- stances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, R-502 retail food refrigeration (retrofit).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II sub- stances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, R-502 retail food refrigeration (new equipment/NIKs).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II sub- stances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, R-502 commer- cial ice machines (ret- rofit).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II sub- stances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, R-502 commer- cial ice machines (new equipment/NIKs).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II sub- stances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12 vending ma- chines (retrofit).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II sub- stances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12 vending ma- chines (new equipment/ NIKs).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II sub- stances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, water coolers (retrofit).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II sub- stances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, water coolers (New equipment/NIKs).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II sub- stances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, household refrig- erators (retrofit).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II sub- stances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, household refrig- erators (new equip- ment/NIKs).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II sub- stances, it has a higher ODP than use of Class II substances.
	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, R-502 house- hold freezers (retrofit).	HCFC-22/HFC-142b/ CFC-12.	Unacceptable	As a blend of both Class I and Class II sub- stances, it has a higher ODP than use of Class II substances.

REFRIGERANTS—Continued

Unacceptable Substitutes

End-use	Substitute	Decision	Comments
CFC-12, 502 household freezers (new equipment/NIKS).	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
	HCFC-22/HFC-142b/CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
CFC-12, R-500 residential dehumidifiers (retrofit).	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
	HCFC-22/HFC-142b/CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
CFC-12, R-500 residential dehumidifiers (new equipment/NIKS).	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
	HCFC-22/HFC-142b/CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
CFC-12, motor vehicle air conditioners (retrofit).	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
	HCFC-22/HFC-142b/CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.
CFC-12, motor vehicle air conditioners (new equipment/NIKS).	Hydrocarbon blend A	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
	HCFC-22/HFC-142b/CFC-12.	Unacceptable	As a blend of both Class I and Class II substances, it has a higher ODP than use of Class II substances.

FOAMS

Unacceptable Substitutes

End-use	Substitute	Decision	Comments
CFC-11 Polyolefin	HCFC-141b (or blends thereof).	Unacceptable	HCFC-141b has an ODP of 0.11, almost equivalent to that of methyl chloroform, a Class I substance. The Agency believes that non-ODP alternatives are sufficiently available to render the use of HCFC-141b unnecessary in polyolefin foams.

SUBSTITUTES ACCEPTABLE SUBJECT TO NARROWED USE LIMITS

End-use	Substitute	Decision	Comments
Electronics cleaning w/ CFC-113, MCF.	Perfluoro-carbons (C5F12, C6F12, C6F14, C7F16, C8F18, C5F11NO, C6F13NO, C7F15NO, and C8F16).	Acceptable for high-performance, precision-engineered applications only where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements.	The principal environmental characteristic of concern for PFCs is that they have long atmospheric lifetimes and high global warming potentials. Although actual contributions to global warming depend upon the quantities of PFCs emitted, the effects are for practical purposes irreversible. Users must observe this limitation on PFC acceptability by conducting a reasonable evaluation of other substitutes to determine that PFC use is necessary to meet performance or safety requirements. Documentation of this evaluation must be kept on file. For additional guidance regarding applications in which PFCs may be appropriate, users should consult the Preamble for this rule-making.

SUBSTITUTES ACCEPTABLE SUBJECT TO NARROWED USE LIMITS—Continued

End-use	Substitute	Decision	Comments
Precision cleaning w/ CFC-113, MCF.	Perfluoro-carbons (C5F12, C6F12, C6F14, C7F16, C8F18, C5F11NO, C6F13NO, C7F15NO, and C8F16).	Acceptable for high-per- formance, precision- engineered applica- tions only where rea- sonable efforts have been made to ascer- tain that other alter- natives are not tech- nically feasible due to performance or safety requirements.	The principal environmental characteristic of concern for PFCs is that they have long atmospheric lifetimes and high global warming potentials. Although actual contributions to global warming depend upon the quantities of PFCs emitted, the effects are for practical purposes irreversible. Users must observe this limitation on PFC acceptability by conducting a reasonable evaluation of other substitutes to determine that PFC use is necessary to meet performance or safety requirements. Documentation of this evaluation must be kept on file. For additional guidance regarding applications in which PFCs may be appropriate, users should consult the Preamble for this rule-making.

UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Comments
Metals cleaning w/CFC-113.	HCFC 141b and its blends.	Unacceptable	High ODP; other alternatives exist. Effective date: As of 30 days after final rule for uses in new equipment (including retrofits made after the effective date); as of January 1, 1996, for uses in existing equipment. EPA will grant, if necessary, narrowed use acceptability listings for CFC-113 past the effective date of the prohibition.
Metals cleaning w/MCF ..	HCFC 141b and its blends.	Unacceptable	High ODP; other alternatives exist. Effective date: As of 30 days after final rule for uses in new equipment (including retrofits made after the effective date); as of January 1, 1996, for uses in existing equipment.
Electronics cleaning w/ CFC-113.	HCFC 141b and its blends.	Unacceptable	High ODP; other alternatives exist. Effective date: As of 30 days after final rule for uses in new equipment (including retrofits made after the effective date); as of January 1, 1996, for uses in existing equipment. EPA will grant, if necessary, narrowed use acceptability listings for CFC-113 past the effective date of the prohibition.
Electronics cleaning w/ MCF.	HCFC 141b and its blends.	Unacceptable	High ODP; other alternatives exist. Effective date: As of 30 days after final rule for uses in new equipment (including retrofits made after the effective date); as of January 1, 1996, for uses in existing equipment.
Precision cleaning w/ CFC-113.	HCFC 141b and its blends.	Unacceptable	High ODP; other alternatives exist. Effective date: As of 30 days after final rule for uses in new equipment (including retrofits made after the effective date); as of January 1, 1996, for uses in existing equipment. EPA will grant, if necessary, narrowed use acceptability listings for CFC-113 past the effective date of the prohibition.
Precision cleaning w/ MCF.	HCFC 141b and its blends.	Unacceptable	High ODP; other alternatives exist. Effective date: As of 30 days after final rule for uses in new equipment (including retrofits made after the effective date); as of January 1, 1996, for uses in existing equipment.

Environmental Protection Agency

Pt. 82, Subpt. G, App. A

FIRE SUPPRESSION AND EXPLOSION PROTECTION STREAMING AGENTS
Substitutes Acceptable Subject to Narrowed Use Limits

End-use	Substitute	Decision	Conditions	Comments
Halon 1211 Streaming Agents.	[CFC Blend]	Acceptable in non-residential uses only.		Use of CFCs are controlled under CAA section 610 which bans use of CFCs in pressurized dispensers, and therefore are not permitted for use in portable fire extinguishers. EPA will list this agent as proposed unacceptable in the next SNAP proposed rule-making. Because CFCs are a Class I substance, production will be phased out by January 1, 1996. See additional comments 1, 2.
	HBFC-22B1		Acceptable in nonresidential uses only.	Proper procedures regarding the operation of the extinguisher and ventilation following dispensing the extinguishant is recommended. Worker exposure may be a concern in small office areas. HBFC-22B1 is considered an interim substitute for Halon 1211. Because the HBFC-22B1 has an ODP of .74, production will be phased out (except for essential uses) on January 1, 1996. This agent was submitted to the Agency as a Premanufacture Notice (PMN) and is presently subject to requirements contained in a Toxic Substance Control Act (TSCA) Consent Order. See additional comments 1, 2.
	C ₆ F ₁₄	Acceptable for non-residential uses where other alternatives are not technically feasible due to performance or safety requirements: a. due to the physical or chemical properties of the agent, or. b. where human exposure to the extinguishing agent may approach cardiosensitization levels or result in other unacceptable health effects under normal operating conditions.		Users must observe the limitations on PFC acceptability by making reasonable effort to undertake the following measures: (i) conduct an evaluation of foreseeable conditions of end use; (ii) determine that the physical or chemical properties or other technical constraints of the other available agents preclude their use; and (iii) determine that human exposure to the other alternative extinguishing agents may approach or result in cardiosensitization or other unacceptable toxicity effects under normal operating conditions; Documentation of such measures must be available for review upon request. The principal environmental characteristic of concern for PFCs is that they have high GWPs and long atmospheric lifetimes. Actual contributions to global warming depend upon the quantities of PFCs emitted. For additional guidance regarding applications in which PFCs may be appropriate, users should consult the description of potential uses which is included in the preamble to this rule-making. See additional comments 1, 2.

Additional Comments:
1—Discharge testing and training should be strictly limited only to that which is essential to meet safety or performance requirements.
2—The agent should be recovered from the fire protection system in conjunction with testing or servicing, and recycled for later use or destroyed.

FIRE SUPPRESSION AND EXPLOSION PROTECTION STREAMING AGENTS
Unacceptable Substitutes

End-use	Substitute	Decision	Comments
Halon 1211 Streaming Agents.	[CFC-11]	Unacceptable	This agent has been suggested for use on large outdoor fires for which non-ozone depleting alternatives are currently used.

[59 FR 13147, Mar. 18, 1994, as amended at 67 FR 4200, Jan. 29, 2002]

APPENDIX B TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE
RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS

Application	Substitute	Decision	Conditions	Comments
CFC–12 Automobile Motor Vehicle Air Conditioning (New Equipment/ NIKs only).	HFC–134a	Acceptable subject to use conditions, for passenger cars and light-duty trucks manufactured for Model Year 2020 or earlier, and for vehicles other than passenger cars or light-duty trucks.	—must be used with unique fittings. —must be used with detailed labels.	EPA is concerned that the existence of several substitutes in this end-use may increase the likelihood of significant refrigerant cross-contamination and potential failure of both air conditioning systems and recovery/recycling equipment.
CFC–12 Automobile Motor Vehicle Air Conditioning (New Equipment/ NIKs only).	HCFC Blend Beta (R–416A).	Acceptable subject to use conditions, for passenger cars and light-duty trucks manufactured for Model Year 2016 or earlier, and for vehicles other than passenger cars or light-duty trucks.	—must be used with unique fittings. —must be used with detailed labels.	EPA is concerned that the existence of several substitutes in this end-use may increase the likelihood of significant refrigerant cross-contamination and potential failure of both air conditioning systems and recovery/recycling equipment.
CFC–12 Automobile Motor Vehicle Air Conditioning (New Equipment/ NIKs only).	R–401C	Acceptable subject to use conditions.	—must be used with unique fittings. —must be used with detailed labels.	EPA is concerned that the existence of several substitutes in this end-use may increase the likelihood of significant refrigerant cross-contamination and potential failure of both air conditioning systems and recovery/recycling equipment.
CFC–12 Automobile Motor Vehicle Air Conditioning (Retrofit Equipment only).	HFC–134a, R–401C, HCFC Blend Beta (R–416A).	Acceptable subject to use conditions.	—must be used with unique fittings. —must be used with detailed labels. —all CFC–12 must be removed from the system prior to retrofitting. Refer to the text for a full description.	EPA is concerned that the existence of several substitutes in this end-use may increase the likelihood of significant refrigerant cross-contamination and potential failure of both air conditioning systems and recovery/recycling equipment. No distinction is made between “retrofit” and “drop-in” refrigerants; retrofitting a car to use a new refrigerant includes all procedures that result in the air conditioning system using a new refrigerant.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

Application	Substitute	Decision	Conditions	Comments
CFC-12 Automobile Motor Vehicle Air Conditioning (New equipment only).	R-152a as a substitute for CFC-12.	Acceptable subject to use conditions.	Engineering strategies and/or devices shall be incorporated into the system such that foreseeable leaks into the passenger compartment do not result in R-152a concentrations of 3.7% v/v or above in any part of the free space inside the passenger compartment for more than 15 seconds when the car ignition is on. Manufacturers must adhere to all the safety requirements listed in the Society of Automotive Engineers (SAE) Standard J639 (adopted 2011), including unique fittings and a flammable refrigerant warning label as well as SAE Standard J2773 (adopted February 2011).	Additional training for service technicians recommended. Manufacturers should conduct and keep on file failure mode and Effect Analysis (FMEA) on the MVAC as stated in SAE J1739.
CFC-12 Automobile Motor Vehicle Air Conditioning (New equipment in passenger cars and light-duty trucks only).	HFO-1234yf as a substitute for CFC-12.	Acceptable subject to use conditions.	As of June 3, 2022: (1) HFO-1234yf MVAC systems must adhere to all of the safety requirements of SAE J639, ⁴⁷ including requirements for a flammable refrigerant warning label, high-pressure compressor cutoff switch and pressure relief devices, and unique fittings. For connections with refrigerant containers for use in professional servicing, use fittings must be consistent with SAE J2844. ⁶⁷ For connections with small refrigerant cans for consumer or professional use, use fittings must have a diameter of 0.5 inches, a thread pitch of 16 thread per inch, and a left thread direction, consistent with SAE J2844.. (2) Manufacturers must conduct Failure Mode and Effect Analysis (FMEA) as provided in SAE J1739. ⁵⁷ Manufacturers must keep the FMEA on file for at least three years from the date of creation.	Additional training for service technicians recommended. HFO-1234yf is also known as 2,3,3,3-tetrafluoro-prop-1-ene (CAS. Reg. No. 754-12-1). Consistent with EPA's Significant New Use Rule for HFO-1234yf under the Toxic Substances Control Act, commercial users or consumers can only recharge MVAC systems with HFO-1234yf where the original charging of the system with HFO-1234yf was done by the original equipment manufacturer. Refrigerant containers of HFO-1234yf for use in professional servicing are from 5 lbs. (2.3 L) to 50 lbs. (23 L) in size. Requirements for handling, storage, and transportation of compressed gases apply to this refrigerant, such as regulations of the Occupational Safety and Health Administration at 29 CFR 1910.101 and the Department of Transportation's requirements at 49 CFR 171-179. Requirements for handling, storage, and transportation of compressed gases apply to this refrigerant, such as regulations of the Occupational Safety and Health Administration at 29 CFR 1910.101 and the Department of Transportation's requirements at 49 CFR 171-179.
CFC-12 Motor Vehicle Air Conditioning (New equipment only).	Carbon dioxide (CO ₂) as a substitute for CFC-12.	Acceptable subject to use conditions.	Engineering strategies and/or mitigation devices shall be incorporated such that in the event of refrigerant leaks, the resulting CO ₂ concentrations do not exceed:	Additional training for service technicians is recommended.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

Application	Substitute	Decision	Conditions	Comments
			The short term exposure level (STEL) of 3% or 30,000 ppm averaged over 15 minutes in the passenger free space¹; and; The ceiling limit of 4% or 40,000 ppm in the passenger breathing zone.² Vehicle manufacturers must keep records of the tests performed for a minimum period of three years demonstrating that CO₂ refrigerant levels do not exceed the STEL of 3% averaged over 15 minutes in the passenger free space, and the ceiling limit of 4% in the breathing zone. The use of CO₂ in MVAC systems must adhere to the standard conditions identified in SAE Standard J639 (2011 version) including: Installation of a high pressure system warning label; Installation of a compressor cut-off switch; and Use of unique fittings with: Outside diameter of 16.6 +0/–0.2 mm (0.6535 +0/–0.0078 inches) for the MVAC low-side; Outside diameter of 18.1 +0/–0.2 mm (0.7126 +0/–0.0078 inches) for the MVAC high-side; and Outside diameter of 20.955 +0/–0.127 mm (0.825 +0/–0.005 inches) and right-hand thread direction for CO₂ refrigerant service containers.³	In designing risk mitigation strategies and/or devices, manufacturers should factor in background CO₂ concentrations in the passenger cabin potentially contributed from normal respiration by the maximum number of vehicle occupants. Use of the standards SAE J1052, SAE J2772, and SAE J2773 is recommended as additional reference. Manufacturers should conduct and keep on file Potential Failure Mode and Effects Analysis in Design [Design FMEA], Potential Failure Mode and Effect Analysis in Manufacturing and Assembly Process [Process FMEA] on the MVAC as stated in SAE J1739.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

Application	Substitute	Decision	Conditions	Comments
Motor vehicle air conditioning (newly manufactured medium-duty passenger vehicles).	HFO-1234yf	Acceptable subject to use conditions.	As of June 3, 2022: (1) HFO-1234yf MVAC systems must adhere to all of the safety requirements of SAE J639, ^{4,7} including requirements for a flammable refrigerant warning label, high-pressure compressor cutoff switch and pressure relief devices, and unique fittings. For connections with refrigerant containers for use in professional servicing, use fittings must be consistent with SAE J2844. ^{6,7} For connections with small refrigerant cans for consumer or professional use, use fittings must have a diameter of 0.5 inches, a thread pitch of 16 thread per inch, and a left thread direction, consistent with SAE J2844. (2) Manufacturers must conduct Failure Mode and Effect Analysis (FMEA) as provided in SAE J1739. ^{5,7} Manufacturers must keep the FMEA on file for at least three years from the date of creation.	Additional training for service technicians recommended. HFO-1234yf is also known as 2,3,3,3-tetrafluoro-prop-1-ene (CAS. Reg. No. 754–12–1). Consistent with EPA's Significant New Use Rule for HFO-1234yf under the Toxic Substances Control Act, commercial users or consumers can only recharge MVAC systems with HFO-1234yf where the original charging of the system with HFO-1234yf was done by the original equipment manufacturer.
Motor vehicle air conditioning (newly manufactured heavy-duty pickup trucks).	HFO-1234yf	Acceptable subject to use conditions.	As of June 3, 2022: (1) HFO-1234yf MVAC systems must adhere to all of the safety requirements of SAE J639, ^{4,7} including requirements for a flammable refrigerant warning label, high-pressure compressor cutoff switch and pressure relief devices, and unique fittings. For connections with refrigerant containers for use in professional servicing, use fittings must be consistent with SAE J2844. ^{6,7} For connections with small refrigerant cans for consumer or professional use, use fittings must have a diameter of 0.5 inches, a thread pitch of 16 thread per inch, and a left thread direction, consistent with SAE J2844. (2) Manufacturers must conduct Failure Mode and Effect Analysis (FMEA) as provided in SAE J1739. ^{5,7} Manufacturers must keep the FMEA on file for at least three years from the date of creation.	Additional training for service technicians recommended. HFO-1234yf is also known as 2,3,3,3-tetrafluoro-prop-1-ene (CAS No. 754–12–1). Consistent with EPA's Significant New Use Rule for HFO-1234yf under the Toxic Substances Control Act, commercial users or consumers can only recharge MVAC systems with HFO-1234yf where the original charging of the system with HFO-1234yf was done by the original equipment manufacturer.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

Application	Substitute	Decision	Conditions	Comments
Motor vehicle air conditioning (newly manufactured complete heavy-duty vans only).	HFO-1234yf	Acceptable subject to use conditions.	As of June 3, 2022: (1) HFO-1234yf MVAC systems must adhere to all of the safety requirements of SAE J639, ^{4,7} including requirements for a flammable refrigerant warning label, high-pressure compressor cutoff switch and pressure relief devices, and unique fittings. For connections with refrigerant containers for use in professional servicing, use fittings must be consistent with SAE J2844. ^{6,7} For connections with small refrigerant cans for consumer or professional use, use fittings must have a diameter of 0.5 inches, a thread pitch of 16 thread per inch, and a left thread direction, consistent with SAE J2844. (2) Manufacturers must conduct Failure Mode and Effect Analysis (FMEA) as provided in SAE J1739. ^{5,7} Manufacturers must keep the FMEA on file for at least three years from the date of creation.	Additional training for service technicians recommended. HFO-1234yf is also known as 2,3,3,3-tetrafluoro-prop-1-ene (CAS No. 754–12–1). HFO-1234yf is acceptable for complete heavy-duty vans. Complete heavy-duty vans are not altered by a secondary or tertiary manufacturer. Consistent with EPA's Significant New Use Rule for HFO-1234yf under the Toxic Substances Control Act, commercial users or consumers can only recharge MVAC systems with HFO-1234yf where the original charging of the system with HFO-1234yf was done by the original equipment manufacturer.
Motor vehicle air conditioning (newly manufactured heavy-duty pickup trucks).	HFO-1234yf	Acceptable subject to use conditions.	As of June 3, 2022: (1) HFO-1234yf MVAC systems must adhere to all of the safety requirements of SAE J639, ^{4,7} including requirements for a flammable refrigerant warning label, high-pressure compressor cutoff switch and pressure relief devices, and unique fittings. For connections with refrigerant containers for use in professional servicing, use fittings must be consistent with SAE J2844. ^{6,7} For connections with small refrigerant cans for consumer or professional use, use fittings must have a diameter of 0.5 inches, a thread pitch of 16 thread per inch, and a left thread direction, consistent with SAE J2844. (2) Manufacturers must conduct Failure Mode and Effect Analysis (FMEA) as provided in SAE J1739. ^{5,7} Manufacturers must keep the FMEA on file for at least three years from the date of creation.	Additional training for service technicians recommended. HFO-1234yf is also known as 2,3,3,3-tetrafluoro-prop-1-ene (CAS No. 754–12–1). Consistent with EPA's Significant New Use Rule for HFO-1234yf under the Toxic Substances Control Act, commercial users or consumers can only recharge MVAC systems with HFO-1234yf where the original charging of the system with HFO-1234yf was done by the original equipment manufacturer.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

Application	Substitute	Decision	Conditions	Comments
Motor vehicle air conditioning (newly manufactured complete heavy-duty vans only).	HFO-1234yf	Acceptable subject to use conditions.	As of June 3, 2022: (1) HFO-1234yf MVAC systems must adhere to all of the safety requirements of SAE J639, ^{4,7} including requirements for a flammable refrigerant warning label, high-pressure compressor cutoff switch and pressure relief devices, and unique fittings. For connections with refrigerant containers for use in professional servicing, use fittings must be consistent with SAE J2844. ^{6,7} For connections with small refrigerant cans for consumer or professional use, use fittings must have a diameter of 0.5 inches, a thread pitch of 16 thread per inch, and a left thread direction, consistent with SAE J2844. (2) Manufacturers must conduct Failure Mode and Effect Analysis (FMEA) as provided in SAE J1739. ^{5,7} Manufacturers must keep the FMEA on file for at least three years from the date of creation.	Additional training for service technicians recommended. HFO-1234yf is also known as 2,3,3,3-tetrafluoro-prop-1-ene (CAS No. 754–12–1). HFO-1234yf is acceptable for complete heavy-duty vans. Complete heavy-duty vans are not altered by a secondary or tertiary manufacturer. Consistent with EPA's Significant New Use Rule for HFO-1234yf under the Toxic Substances Control Act, commercial users or consumers can only recharge MVAC systems with HFO-1234yf where the original charging of the system with HFO-1234yf was done by the original equipment manufacturer.
Motor vehicle air conditioning (newly manufactured nonroad agricultural tractors with greater than 40 horsepower).	HFO-1234yf	Acceptable subject to use conditions.	As of June 3, 2022: (1) Systems must adhere to all of the safety requirements of SAE J639, ^{4,7} including requirements for a flammable refrigerant warning label, high-pressure compressor cutoff switch and pressure relief devices, and unique fittings. For connections with refrigerant containers for use in professional servicing, use fittings must be consistent with SAE J2844. ^{6,7} For connections with small refrigerant cans for consumer or professional use, use fittings must have a diameter of 0.5 inches, a thread pitch of 16 thread per inch, and a left thread direction, consistent with SAE J2844. (2) Manufacturers must conduct Failure Mode and Effect Analysis (FMEA) as provided in SAE J1739. ^{5,7} Manufacturers must keep the FMEA on file for at least three years from the date of creation.	Additional training for service technicians recommended. HFO-1234yf is also known as 2,3,3,3-tetrafluoro-prop-1-ene (CAS No. 754–12–1). Consistent with EPA's Significant New Use Rule for HFO-1234yf under the Toxic Substances Control Act, commercial users or consumers can only recharge MVAC systems with HFO-1234yf where the original charging of the system with HFO-1234yf was done by the original equipment manufacturer.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

Application	Substitute	Decision	Conditions	Comments
Motor vehicle air conditioning (newly manufactured nonroad self-propelled agricultural machinery).	HFO-1234yf	Acceptable subject to use conditions.	As of June 3, 2022: (1) HFO-1234yf MVAC systems must adhere to all of the safety requirements of SAE J639, ^{4,7} including requirements for a flammable refrigerant warning label, high-pressure compressor cutoff switch and pressure relief devices, and unique fittings. For connections with refrigerant containers for use in professional servicing, use fittings must be consistent with SAE J2844. ^{6,7} For connections with small refrigerant cans for consumer or professional use, use fittings must have a diameter of 0.5 inches, a thread pitch of 16 thread per inch, and a left thread direction, consistent with SAE J2844. (2) Manufacturers must conduct Failure Mode and Effect Analysis (FMEA) as provided in SAE J1739. ^{5,7} Manufacturers must keep the FMEA on file for at least three years from the date of creation.	Additional training for service technicians recommended. HFO-1234yf is also known as 2,3,3,3-tetrafluoro-prop-1-ene (CAS No. 754–12–1). Consistent with EPA's Significant New Use Rule for HFO-1234yf under the Toxic Substances Control Act commercial users or consumers can only recharge MVAC systems with HFO-1234yf where the original charging of the system with HFO-1234yf was done by the original equipment manufacturer.
Motor vehicle air conditioning (newly manufactured nonroad compact equipment).	HFO-1234yf	Acceptable subject to use conditions.	As of June 3, 2022: (1) HFO-1234yf MVAC systems must adhere to all of the safety requirements of SAE J639, ^{4,7} including requirements for a flammable refrigerant warning label, high-pressure compressor cutoff switch and pressure relief devices, and unique fittings. For connections with refrigerant containers for use in professional servicing, use fittings must be consistent with SAE J2844. ^{6,7} For connections with small refrigerant cans for consumer or professional use, use fittings must have a diameter of 0.5 inches, a thread pitch of 16 thread per inch, and a left thread direction, consistent with SAE J2844). (2) Manufacturers must conduct Failure Mode and Effect Analysis (FMEA) as provided in SAE J1739. ^{5,7} Manufacturers must keep the FMEA on file for at least three years from the date of creation.	Additional training for service technicians recommended. HFO-1234yf is also known as 2,3,3,3-tetrafluoro-prop-1-ene (CAS No. 754–12–1). Consistent with EPA's Significant New Use Rule for HFO-1234yf under the Toxic Substances Control Act (80 FR 37166, June 30, 2015), commercial users or consumers can only recharge MVAC systems with HFO-1234yf where the original charging of the system with HFO-1234yf was done by the original equipment manufacturer.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

Application	Substitute	Decision	Conditions	Comments
Motor vehicle air conditioning (newly manufactured nonroad construction, forestry, and mining equipment).	HFO-1234yf	Acceptable subject to use conditions.	As of June 3, 2022: (1) HFO-1234yf MVAC systems must adhere to all of the safety requirements of SAE J639, ^{4,7} including requirements for a flammable refrigerant warning label, high-pressure compressor cutoff switch and pressure relief devices, and unique fittings. For connections with refrigerant containers for use in professional servicing, use fittings must be consistent with SAE J2844. ^{6,7} For connections with small refrigerant cans for consumer or professional use, use fittings must have a diameter of 0.5 inches, a thread pitch of 16 thread per inch, and a left thread direction, consistent with SAE J2844. (2) Manufacturers must conduct Failure Mode and Effect Analysis (FMEA) as provided in SAE J1739. ^{5,7} Manufacturers must keep the FMEA on file for at least three years from the date of creation.	Additional training for service technicians recommended. HFO-1234yf is also known as 2,3,3,3-tetrafluoro-prop-1-ene (CAS No. 754–12–1). Consistent with EPA's Significant New Use Rule for HFO-1234yf under the Toxic Substances Control Act, commercial users or consumers can only recharge MVAC systems with HFO-1234yf where the original charging of the system with HFO-1234yf was done by the original equipment manufacturer.
Motor vehicle air conditioning (newly manufactured nonroad commercial utility vehicles).	HFO-1234yf	Acceptable subject to use conditions.	As of June 3, 2022: (1) HFO-1234yf MVAC systems must adhere to all of the safety requirements of SAE J639, ^{4,7} including requirements for a flammable refrigerant warning label, high-pressure compressor cutoff switch and pressure relief devices, and unique fittings. For connections with refrigerant containers for use in professional servicing, use fittings must be consistent with SAE J2844. ^{6,7} For connections with small refrigerant cans for consumer or professional use, use fittings must have a diameter of 0.5 inches, a thread pitch of 16 thread per inch, and a left thread direction, consistent with SAE J2844. (2) Manufacturers must conduct Failure Mode and Effect Analysis (FMEA) as provided in SAE J1739. ^{5,7} Manufacturers must keep the FMEA on file for at least three years from the date of creation.	Additional training for service technicians recommended. HFO-1234yf is also known as 2,3,3,3-tetrafluoro-prop-1-ene (CAS No. 754–12–1). Consistent with EPA's Significant New Use Rule for HFO-1234yf under the Toxic Substances Control Act, commercial users or consumers can only recharge MVAC systems with HFO-1234yf where the original charging of the system with HFO-1234yf was done by the original equipment manufacturer.

¹Free space is defined as the space inside the passenger compartment excluding the space enclosed by the ducting in the HVAC module.

²Area inside the passenger compartment where the driver's and passengers' heads are located during a normal sitting position. Refer to SAE J1052 for information on determining passenger head position.

³The refrigerant service containers fitting requirement applies only to refrigerant service containers used during servicing of the MVAC, in accordance with the provisions established for MVAC servicing under 40 CFR part 82, subpart B.

REFRIGERANTS—ACCEPTABLE SUBJECT TO NARROWED USE LIMITS

End-use	Substitute	Decision	Comments
CFC-11, CFC-12, CFC-113, CFC-114, CFC-115 Non-Mechanical Heat Transfer, New.	C ₃ F ₈ , C ₄ F ₁₀ , C ₅ F ₁₂ , C ₅ F ₁₁ NO, C ₆ F ₁₄ , C ₆ F ₁₃ NO, C ₇ F ₁₆ , C ₇ F ₁₅ NO, C ₈ F ₁₈ , C ₈ F ₁₆ O, and C ₉ F ₂₁ N.	Acceptable only where no other alternatives are technically feasible due to safety or performance requirements.	Users must observe the limitations on PFC acceptability by determining that the physical or chemical properties or other technical constraints of the other available agents preclude their use. Documentation of such measures must be available for review upon request. The principal environmental characteristic of concern for PFCs is that they have high GWPs and long atmospheric lifetimes. EPA strongly recommends recovery and recycling of these substitutes.
Motor vehicle air conditioning (new equipment in passenger cars and light-duty trucks only).	HFC-134a	Acceptable for use in Model Year (MY) 2021 through MY 2025 passenger cars and light-duty trucks destined for export, where reasonable efforts have been made to ascertain that other alternatives are not technically feasible because of lack of infrastructure for servicing with alternative refrigerants in the destination country.	Vehicle manufacturers must document their determination that the infrastructure is not in place for each country to which they plan to export vehicles and must retain the documentation in their files for at least five years after date of its creation for the purpose of demonstrating compliance. Documentation is to include descriptions of: • Products in which the substitute is needed; • Substitutes examined and rejected for the destination country; • Reason for rejection of other alternatives; and • Anticipated date other substitutes will be available and projected date of transition in the destination country.

REFRIGERANTS—UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Comments
CFC-11, CFC-12, CFC-113, CFC-114, R-500 Centrifugal Chillers (Retrofit and New Equipment/NIKS).	R-405A	Unacceptable	R-405A contains R-c318, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	Hydrocarbon Blend B	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12 Reciprocating Chillers (Retrofit and New Equipment/NIKS).	R-405A	Unacceptable	R-405A contains R-c318, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	Hydrocarbon Blend B	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-11, CFC-12, R-502 Industrial Process Refrigeration (Retrofit and New Equipment/NIKS).	R-403B	Unacceptable	R-403B contains R-218, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	R-405A	Unacceptable	R-405A contains R-c318, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
CFC-12, R-502 Ice Skating Rinks (Retrofit and New Equipment/NIKS).	R-405A	Unacceptable	R-405A contains R-c318, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	Hydrocarbon Blend B	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, R-502 Cold Storage Warehouses (Retrofit and New Equipment/NIKS).	R-403B	Unacceptable	R-403B contains R-218, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.

Environmental Protection Agency

Pt. 82, Subpt. G, App. B

REFRIGERANTS—UNACCEPTABLE SUBSTITUTES—Continued

End-use	Substitute	Decision	Comments
CFC-12, R-500, R-502 Refrigerated Transport (Retrofit and New Equipment/NIKS).	R-405A	Unacceptable	R-405A contains R-c318, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	Hydrocarbon Blend B	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
	R-403B	Unacceptable	R-403B contains R-218, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	R-405A	Unacceptable	R-405A contains R-c318, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
CFC-12, R-502 Retail Food Refrigeration (Retrofit and New Equipment/NIKS).	Hydrocarbon Blend B	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
	R-403B	Unacceptable	R-403B contains R-218, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	R-405A	Unacceptable	R-405A contains R-c318, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	Hydrocarbon Blend B	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, R-502 Commercial Ice Machines (Retrofit and New Equipment/NIKS).	R-403B	Unacceptable	R-403B contains R-218, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	R-405A	Unacceptable	R-405A contains R-c318, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	Hydrocarbon Blend B	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
	R-403B	Unacceptable	R-403B contains R-218, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
CFC-12 Vending Machines (Retrofit and New Equipment/NIKS).	R-405A	Unacceptable	R-405A contains R-c318, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	Hydrocarbon Blend B	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12 Water Coolers (Retrofit and New Equipment/NIKS).	R-405A	Unacceptable	R-405A contains R-c318, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	Hydrocarbon Blend B	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12 Household Refrigerators (Retrofit and New Equipment/NIKS).	R-405A	Unacceptable	R-405A contains R-c318, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	Hydrocarbon Blend B	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12, R-502 Household Freezers (Retrofit and New Equipment/NIKS).	R-403B	Unacceptable	R-403B contains R-218, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	R-405A	Unacceptable	R-405A contains R-c318, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	Hydrocarbon Blend B	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.

REFRIGERANTS—UNACCEPTABLE SUBSTITUTES—Continued

End-use	Substitute	Decision	Comments
CFC-12, R-500 Residential Dehumidifiers (Retrofit and New Equipment/NIKs).	R-405A	Unacceptable	R-405A contains R-c318, a PFC, which has an extremely high GWP and lifetime. Other substitutes exist which do not contain PFCs.
	Hydrocarbon Blend B	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
CFC-12 Motor Vehicle Air Conditioners (Retrofit and New Equipment/NIKs).	R-405A	Unacceptable	R-405A contains R-c318, a PFC, which has an extremely high GWP and lifetime. Other Substitutes exist which do not contain PFCs.
	Hydrocarbon Blend B	Unacceptable	Flammability is a serious concern. Data have not been submitted to demonstrate it can be used safely in this end-use.
	Flammable Substitutes, other than R-152a or HFO-1234yf in new equipment.	Unacceptable	The risks associated with using flammable substitutes (except R-152a and HFO-1234yf) in this end-use have not been addressed by a risk assessment. R-152a and HFO-1234yf may be used in new equipment with the use conditions in appendix B to this subpart.
Motor vehicle air conditioning (new equipment in passenger cars and light-duty trucks only).	HFC-134a	Unacceptable as of Model Year 2021 except where allowed under narrowed use limit.	HFC-134a has a Chemical Abstracts Service Registry Number (CAS Reg. No.) of 811-97-2 and it is also known by the name 1,1,1,2-tetrafluoropropane. HFC-134a has a GWP of 1,430. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date. This listing does not prohibit the servicing or replacement of motor vehicle air conditioning systems manufactured to use HFC-134a.
Motor vehicle air conditioning (new equipment in passenger cars and light-duty trucks only).	R-406A, R-414A (HCFC Blend Xi, GHG-X4), R-414B (HCFC Blend Omicron), HCFC Blend Delta (Free Zone), Freeze 12, GHG-X5, HCFC Blend Lambda (GHG-HP), R-416A (FRIGC FR-12, HCFC Blend Beta).	Unacceptable as of Model Year 2017.	These refrigerants all contain HCFCs. They have GWPs ranging from 1,080 to 2,340 and ODPs ranging from 0.008 to 0.056. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Motor vehicle air conditioning (new equipment in passenger cars and light-duty trucks only).	SP34E, R-426A (RS-24, new formulation).	Unacceptable as of Model Year 2017.	These blends have GWPs ranging from approximately 1,410 to 1,510. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.

Environmental Protection Agency

Pt. 82, Subpt. G, App. B

SOLVENT CLEANING SECTOR—ACCEPTABLE SUBJECT TO USE CONDITIONS SUBSTITUTES

Application	Substitute	Decision	Conditions	Comments
Electronics Cleaning w/CFC-113, MCF.	HCFC-225 ca/cb	Acceptable	Subject to the company set exposure limit of 25 ppm of the -ca isomer.	HCFC-225 ca/cb blend is offered as a 45%-ca/55%-cb blend. The company set exposure limit of the -ca isomer is 25 ppm. The company set exposure limit of the -cb isomer is 250 ppm. It is the Agency's opinion that with the low emission cold cleaning and vapor degreasing equipment designed for this use, the 25 ppm limit of the HCFC-225 ca isomer can be met. The company is submitting further exposure monitoring data.
Precision Cleaning w/ CFC-113, MCF.	HCFC-225 ca/cb	Acceptable	Subject to the company set exposure limit of 25 ppm of the -ca isomer.	HCFC-225 ca/cb blend is offered as a 45%-ca/55%-cb blend. The company set exposure limit of the -ca isomer is 25 ppm. The company set exposure limit of the -cb isomer is 250 ppm. It is the Agency's opinion that with the low emission cold cleaning and vapor degreasing equipment designed for this use, the 25 ppm limit of the HCFC-225 ca isomer can be met. The company is submitting further exposure monitoring data.

SOLVENT CLEANING SECTOR—UNACCEPTABLE SUBSTITUTES

End use	Substitute	Decision	Comments
Metals cleaning w/CFC-113 ..	Dibromomethane	Unacceptable	High ODP; other alternatives exist.
Metals cleaning w/MCF	Dibromomethane	Unacceptable	High ODP; other alternatives exist.
Electronics cleaning w/CFC-113.	Dibromomethane	Unacceptable	High ODP; other alternatives exist.
Electronics cleaning w/MCF ..	Dibromomethane	Unacceptable	High ODP; other alternatives exist.
Precision cleaning w/CFC-113.	Dibromomethane	Unacceptable	High ODP; other alternatives exist.
Precision cleaning w/MCF	Dibromomethane	Unacceptable	High ODP; other alternatives exist.

FIRE SUPPRESSION AND EXPLOSION PROTECTION—ACCEPTABLE SUBJECT TO USE CONDITIONS:
TOTAL FLOODING AGENTS

Application	Substitute	Decision	Conditions	Comments
Halon 1301 Total Flooding Agents.	Inert Gas/Powdered Aerosol Blend.	Acceptable as a Halon 1301 substitute in normally unoccupied areas.	In areas where personnel could possibly be present, as in a cargo area, EPA requires that the employer shall provide a pre-discharge employee alarm capable of being perceived above ambient light or noise levels for alerting employees before system discharge. The pre-discharge alarm shall provide employees time to safely exit the discharge area prior to system discharge.	The manufacturer's SNAP application requested listing for use in unoccupied areas only. See additional comment 2.

Additional Comments

1—Must conform with OSHA 29 CFR 1910 Subpart L Section 1910.160 of the U.S. Code. You should use clean agents in accordance with the safety guidelines in the latest edition of the NFPA 2001 Standard for Clean Agent Fire Extinguishing Systems.

2—Per OSHA requirements, protective gear (SCBA) must be available in the event personnel must enter/reenter the area.

3—Discharge testing should be strictly limited only to that which is essential to meet safety or performance requirements.

4—The agent should be recovered from the fire protection system in conjunction with testing or servicing, and recycled for later use or destroyed.

FIRE SUPPRESSION AND EXPLOSION PROTECTION—ACCEPTABLE SUBJECT TO NARROWED USE
LIMITS: TOTAL FLOODING AGENTS

End-use	Substitute	Decision	Conditions	Further information
Total flooding ...	Sulfurhexafluoride (SF ₆).	Acceptable subject to narrowed use in limits.	May be used as a discharge test agent in military uses and in civilian aircraft uses only.	This agent has an atmospheric lifetime greater than 1,000 years, with an estimated 100-year, 500-year, and 1,000-year GWP of 16,100, 26,110 and 32,803 respectively. Users should limit testing only to that which is essential to meet safety or performance requirements. This agent is only used to test new Halon 1301 systems.
Total flooding ...	CF ₃ I	Acceptable subject to narrowed use limits.	Use only in normally unoccupied areas.	See additional comments 1, 2, 3, 4, 5. Use of this agent should be in accordance with the safety guidelines in the latest edition of the NFPA 2001 Standard for Clean Agent Fire Extinguishing Systems. Manufacturer has not applied for listing for use in normally occupied areas. Preliminary cardiosensitization data indicates that this agent would not be suitable for use in normally occupied areas. See additional comments 1, 2, 3, 4, 5.

Additional comments:

1—Must conform with relevant OSHA requirements, including 29 CFR 1910, Subpart L, Sections 1910.160 and 1910.162.

2—Per OSHA requirements, protective gear (SCBA) should be available in the event personnel should reenter the area.

3—Discharge testing should be strictly limited to that which is essential to meet safety or performance requirements.

4—The agent should be recovered from the fire protection system in conjunction with testing or servicing, and recycled for later use or destroyed.

5—EPA has no intention of duplicating or displacing OSHA coverage related to the use of personal protective equipment (e.g., respiratory protection), fire protection, hazard communication, worker training or any other occupational safety and health standard with respect to halon substitutes.

FIRE SUPPRESSION AND EXPLOSION PROTECTION—UNACCEPTABLE SUBSTITUTES

Application	Substitute	Decision	Comments
Halon 1301 Total Flooding Agents.	HFC-32	Unacceptable	Data indicate that HFC-32 is flammable and therefore is not suitable as a halon substitute.

Environmental Protection Agency

Pt. 82, Subpt. G, App. C

[60 FR 31103, June 13, 1995, as amended at 67 FR 4200, Jan. 29, 2002; 73 FR 33310, June 12, 2008; 76 FR 17519, Mar. 29, 2011; 77 FR 17350, Mar. 26, 2012; 77 FR 33330, June 6, 2012; 80 FR 42952, July 20, 2015; 81 FR 86881, Dec. 1, 2016; 87 FR 26292, May 4, 2022]

APPENDIX C TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES LISTED IN THE MAY 22, 1996 FINAL RULE, EFFECTIVE JUNE 21, 1996

REFRIGERATION AND AIR CONDITIONING SECTOR—ACCEPTABLE SUBJECT TO USE CONDITIONS

HCFC Blend Delta and Blend Zeta are acceptable subject to the following conditions when used to retrofit a CFC-12 motor vehicle air conditioning system:

1. Each refrigerant may only be used with a set of fittings that is unique to that refrigerant. These fittings (male or female, as appropriate) must be used with all containers of the refrigerant, on can taps, on recovery, recycling, and charging equipment, and on all air conditioning system service ports. These fittings must be designed to mechanically prevent cross-charging with another refrigerant. A refrigerant may only be used with the fittings and can taps specifically intended for that refrigerant. Using an adapter or deliberately modifying a fitting to use a different refrigerant will be a violation of this use condition. In addition, fittings shall meet the following criteria, derived from Society of Automotive Engineers (SAE) standards and recommended practices:

a. When existing CFC-12 service ports are to be retrofitted, conversion assemblies shall attach to the CFC-12 fitting with a thread lock adhesive and/or a separate mechanical latching mechanism in a manner that permanently prevents the assembly from being removed.

b. All conversion assemblies and new service ports must satisfy the vibration testing requirements of sections 3.2.1 or 3.2.2 of SAE J1660, as applicable, excluding references to SAE J639 and SAE J2064, which are specific to HFC-134a.

c. In order to prevent discharge of refrigerant to the atmosphere, systems shall have a device to limit compressor operation before the pressure relief device will vent refrigerant. This requirement is waived for systems that do not feature such a pressure relief device.

d. All CFC-12 service ports not retrofitted with conversion assemblies shall be rendered permanently incompatible for use with CFC-12 related service equipment by fitting with a device attached with a thread lock adhesive and/or a separate mechanical latching mechanism in a manner that prevents the device from being removed.

2. When a retrofit is performed, a label must be used as follows:

a. The person conducting the retrofit must apply a label to the air conditioning system in the engine compartment that contains the following information:

i. The name and address of the technician and the company performing the retrofit.

ii. The date of the retrofit.

iii. The trade name, charge amount, and, when applicable, the ASHRAE refrigerant numerical designation of the refrigerant.

iv. The type, manufacturer, and amount of lubricant used.

v. If the refrigerant is or contains an ozone-depleting substance, the phrase “ozone depleter.”

vi. If the refrigerant displays flammability limits as measured according to ASTM E681, the statement “This refrigerant is FLAMMABLE. Take appropriate precautions.”

b. This label must be large enough to be easily read and must be permanent.

c. The background color must be unique to the refrigerant.

d. The label must be affixed to the system over information related to the previous refrigerant, in a location not normally replaced during vehicle repair.

e. Information on the previous refrigerant that cannot be covered by the new label must be permanently rendered unreadable.

3. No substitute refrigerant may be used to “top-off” a system that uses another refrigerant. The original refrigerant must be recovered in accordance with regulations issued under section 609 of the CAA prior to charging with a substitute.

SOLVENT CLEANING SECTOR—PROPOSED ACCEPTABLE SUBJECT TO USE CONDITIONS SUBSTITUTES

Application	Substitute	Decision	Conditions	Comments
Metals Cleaning with CFC-113, MCF and HCFC-141b.	Monochlorotoluenes and benzotrifluorides.	Acceptable	Subject to a 50 ppm workplace standard for monochlorotoluenes and a 25 ppm standard for benzotrifluorides.	The workplace standard for monochlorotoluenes is based on an OSHA PEL of 50 ppm for orthochlorotoluene. The workplace standard for benzotrifluorides is based on a recent toxicology study.

SOLVENT CLEANING SECTOR—PROPOSED ACCEPTABLE SUBJECT TO USE CONDITIONS
SUBSTITUTES—Continued

Application	Substitute	Decision	Conditions	Comments
Electronics Cleaning w/ CFC-113, MCF and HCFC-141b.	Monochlorotoluenes and benzotrifluorides.	Acceptable	Subject to a 50 ppm workplace standard for monochlorotoluenes and a 25 ppm standard for benzotrifluorides.	The workplace standard for monochlorotoluenes is based on an OSHA PEL of 50 ppm for orthochlorotoluene. The workplace standard for benzotrifluorides is based on a recent toxicology study.
Precision Cleaning w/ CFC-113, MCF and HCFC-141b.	Monochlorotoluenes and benzotrifluorides.	Acceptable	Subject to a 50 ppm workplace standard for monochlorotoluenes and a 25 ppm standard for benzotrifluorides.	The workplace standard for monochlorotoluenes is based on an OSHA PEL of 50 ppm for orthochlorotoluene. The workplace standard for benzotrifluorides is based on a recent toxicology study.

ACCEPTABLE SUBJECT TO NARROWED USE LIMITS: STREAMING AGENTS

Application	Substitute	Decision	Comments
Halon 1211 Streaming Agents	CF ₃ I	Acceptable in non-residential uses only.	

AEROSOLS—PROPOSED ACCEPTABLE SUBJECT TO USE CONDITIONS SUBSTITUTES

Application	Substitute	Decision	Conditions	Comments
CFC-113, MCF and HCFC-141b as solvent.	Monochlorotoluenes and benzotrifluorides.	Acceptable	Subject to a 50 ppm workplace standard for monochlorotoluenes and a 25 ppm standard for benzotrifluorides.	The workplace standard for monochlorotoluenes is based on an OSHA PEL of 50 ppm for orthochlorotoluene. The workplace standard for benzotrifluorides is based on a recent toxicology study.

ADHESIVES, COATINGS AND INKS—PROPOSED ACCEPTABLE SUBJECT TO USE CONDITIONS
SUBSTITUTES

Application	Substitute	Decision	Conditions	Comments
CFC-113, MCF and HCFC-141b.	Monochlorotoluenes and benzotrifluorides.	Acceptable	Subject to a 50 ppm workplace standard for monochlorotoluenes and a 25 ppm standard for benzotrifluorides.	The workplace standard for monochlorotoluenes is based on an OSHA PEL of 50 ppm for orthochlorotoluene. The workplace standard for benzotrifluorides is based on a recent toxicology study.

[61 FR 25592, May 22, 1996, as amended at 67 FR 4201, Jan. 29, 2002]

EFFECTIVE DATE NOTE: At 61 FR 25592, May 22, 1996, appendix C to subpart G of part 82 was added. This appendix contains information collection and recordkeeping requirements that will not become effective until approval has been given by the Office of Management and Budget.

APPENDIX D TO SUBPART G OF PART 82—
SUBSTITUTES SUBJECT TO USE RE-
STRICTIONS AND UNACCEPTABLE SUB-
STITUTES

Summary of Decisions

Refrigeration and Air Conditioning Sector
Acceptable Subject to Use Conditions

R-406A/"GHG"/"McCool", "GHG-HP", "GHG-X4"/"Autofrost"/"Chill-It", and "Hot Shot"/"Kar Kool" are acceptable substitutes for CFC-12 in retrofitted motor vehicle air conditioning systems (MVACs) subject to the use condition that a retrofit to these refrigerants must include replacing non-barrier hoses with barrier hoses.

For all refrigerants submitted for use in motor vehicle air conditioning systems, subsequent to the effective date of this FRM, in addition to the information previously required in the March 18, 1994 final SNAP rule (58 FR 13044), SNAP submissions must include specifications for the fittings similar to those found in SAE J639, samples of all fittings, and the detailed label described below at the same time as the initial SNAP submission, or the submission will be considered incomplete. Under section 612 of the Clean Air Act, substitutes for which submissions are incomplete may not be sold or used, regardless of other acceptability determinations, and the prohibition against sale of a new refrigerant will not end until 90 days after EPA determines the submission is complete.

In addition, the use of a) R-406A/"GHG"/"McCool", "HCFC Blend Lambda"/"GHG-HP", R-414A/"HCFC Blend Xi"/"GHG-X4"/"Autofrost"/"Chill-It", R-414B/"Hot Shot"/"Kar Kool", and R-416A/"HCFC Blend Beta"/"FREEZE 12" as CFC-12 substitutes in retrofitted MVACs, and b) all refrigerants submitted for, and listed in, subsequent Notices of Acceptability as substitutes for CFC-12 in MVACs, must meet the following conditions.

1. Each refrigerant may only be used with a set of fittings that is unique to that refrigerant. These fittings (male or female, as appropriate) must be designed by the manufacturer of the refrigerant. The manufacturer is responsible to ensure that the fittings meet all of the requirements listed below, including testing according to SAE standards. These fittings must be designed to mechanically prevent cross-charging with another refrigerant, including CFC-12.

The fittings must be used on all containers of the refrigerant, on can taps, on recovery, recycling, and charging equipment, and on all air conditioning system service ports. A refrigerant may only be used with the fittings and can taps specifically intended for that refrigerant and designed by the manufacturer of the refrigerant. Using a refrigerant with a fitting designed by anyone else,

even if it is different from fittings used with other refrigerants, is a violation of this use condition. Using an adapter or deliberately modifying a fitting to use a different refrigerant is a violation of this use condition.

Fittings shall meet the following criteria, derived from Society of Automotive Engineers (SAE) standards and recommended practices:

a. When existing CFC-12 service ports are retrofitted, conversion assemblies shall attach to the CFC-12 fitting with a thread lock adhesive and/or a separate mechanical latching mechanism in a manner that permanently prevents the assembly from being removed.

b. All conversion assemblies and new service ports must satisfy the vibration testing requirements of section 3.2.1 or 3.2.2 of SAE J1660, as applicable, excluding references to SAE J639 and SAE J2064, which are specific to HFC-134a.

c. In order to prevent discharge of refrigerant to the atmosphere, systems shall have a device to limit compressor operation before the pressure relief device will vent refrigerant.

d. All CFC-12 service ports not retrofitted with conversion assemblies shall be rendered permanently incompatible for use with CFC-12 related service equipment by fitting with a device attached with a thread lock adhesive and/or a separate mechanical latching mechanism in a manner that prevents the device from being removed.

2. When a retrofit is performed, a label must be used as follows:

a. The person conducting the retrofit must apply a label to the air conditioning system in the engine compartment that contains the following information:

i. The name and address of the technician and the company performing the retrofit.

ii. The date of the retrofit.

iii. The trade name, charge amount, and, when applicable, the ASHRAE refrigerant numerical designation of the refrigerant.

iv. The type, manufacturer, and amount of lubricant used.

v. If the refrigerant is or contains an ozone-depleting substance, the phrase "ozone depleter".

vi. If the refrigerant displays flammability limits as measured according to ASTM E681, the statement "This refrigerant is FLAMMABLE. Take appropriate precautions."

b. The label must be large enough to be easily read and must be permanent.

c. The background color must be unique to the refrigerant.

d. The label must be affixed to the system over information related to the previous refrigerant, in a location not normally replaced during vehicle repair.

e. In accordance with SAE J639, testing of labels must meet ANSI/UL 969-1991.

Pt. 82, Subpt. G, App. D

40 CFR Ch. I (7–1–24 Edition)

f. Information on the previous refrigerant that cannot be covered by the new label must be rendered permanently unreadable.

3. No substitute refrigerant may be used to “top-off” a system that uses another refrigerant.

The original refrigerant must be recovered in accordance with regulations issued under section 609 of the CAA prior to charging with a substitute.

SOLVENT CLEANING SECTOR

[Acceptable Subject to Use Conditions Substitutes]

Application	Substitute	Decision	Conditions	Comments
Electronics Cleaning w/CFC-113 and MCF.	HFC-4310mee	Acceptable	Subject to a 200 ppm time-weighted average workplace exposure standard and a 400 ppm workplace exposure ceiling.	
Precision Cleaning w/CFC-113 and MCF.	HFC-4310mee	Acceptable	Subject to a 200 ppm time-weighted average workplace exposure standard and a 400 ppm workplace exposure ceiling.	

SOLVENT SECTOR

[Acceptable Subject to Narrowed Use Limits]

Application	Substitute	Decision	Comments
Electronics Cleaning w/CFC-113 and MCF.	Perfluoropolyethers.	Perfluoropolyethers are acceptable substitutes for CFC-113 and MCF in the precision cleaning sector for high performance, precision-engineered applications only where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements.	PFPEs have similar global warming profile to the PFCs, and the SNAP decision on PFPEs parallels that for PFCs.
Precision Cleaning w/CFC-113 and MCF.	Perfluoropolyethers.	Perfluoropolyethers are acceptable substitutes for CFC-113 and MCF in the precision cleaning sector for high performance, precision-engineered applications only where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements.	PFPEs have similar global warming profile to the PFCs, and the SNAP decision on PFPEs parallels that for PFCs.

Unacceptable Substitutes

End-use	Substitute	Decision	Comments
Electronics Cleaning w/CFC-113 and MCF.	HCFC-141b ...	Extension of existing unacceptability determination to grant existing uses in high-performance electronics permission to continue until January 1, 1997.	This determination extends the use date for HCFC-141b in solvent cleaning, but only for existing users in high-performance electronics and only for one year.
Precision Cleaning w/CFC-113 and MCF.	HCFC-141b ...	Extension of existing unacceptability determination to grant existing uses in precision cleaning permission to continue until January 1, 1997.	This determination extends the use date for HCFC-141b in solvent cleaning, but only for existing users in precision cleaning and only for one year.

AEROSOLS SECTOR

Acceptable Subject to Narrowed Use Limits

Application	Substitute	Decision	Comments
CFC-113, MCF, and HCFC-141b as aerosol solvents.	Perfluorocarbons	Perfluorocarbons are acceptable substitutes for aerosol applications only where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements.	PFCs have extremely long atmospheric lifetimes and high Global Warming Potentials. This decision reflects these concerns and is patterned after the SNAP decision on PFCs in the solvent cleaning sector.

Environmental Protection Agency

Pt. 82, Subpt. G, App. G

AEROSOLS SECTOR—Continued
Acceptable Subject to Narrowed Use Limits

Application	Substitute	Decision	Comments
	Perfluoropolyethers.	Perfluorocarbons are acceptable substitutes for aerosol applications only where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements.	PFPEs have similar global warming profile to the PFCs, and the SNAP decision on PFPEs parallels that for PFCs in the solvent cleaning sector.
Unacceptable Substitutes			
End-use	Substitute	Decision	Comments
CFC-11, CFC-12, HCFC-22, and HCFC-142b as aerosol propellants.	SF6	Unacceptable	SF6 has the highest GWP of all industrial gases, and other compressed gases meet user needs in this application equally well.

[61 FR 54040, Oct. 16, 1996, as amended at 80 FR 42953, July 20, 2015]

APPENDIX E TO SUBPART G OF PART 82—UNACCEPTABLE SUBSTITUTES LISTED IN THE JANUARY 26, 1999 FINAL RULE, EFFECTIVE JANUARY 26, 1999

REFRIGERATION AND AIR-CONDITIONING SECTOR UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Comments
All refrigeration and air-conditioning end uses	MT-31	Unacceptable	Chemical contained in this blend presents unacceptable toxicity risk.

[64 FR 3865, Jan. 26, 1999]

APPENDIX F TO SUBPART G OF PART 82—UNACCEPTABLE SUBSTITUTES LISTED IN THE JANUARY 26, 1999 FINAL RULE, EFFECTIVE JANUARY 26, 1999

REFRIGERATION AND AIR-CONDITIONING SECTOR UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Comments
All refrigeration and air-conditioning end uses.	Hexafluoropropylene (HFP) and all HFP-containing blends.	Unacceptable	Presents unacceptable toxicity risk.

[64 FR 3868, Jan. 26, 1999]

APPENDIX G TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES LISTED IN THE MARCH 3, 1999, FINAL RULE, EFFECTIVE APRIL 2, 1999.

REFRIGERANTS UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Comments
CFC-12, R-502, and HCFC-22 Household Refrigeration, Transport Refrigeration, Vending Machines, Cold Storage Warehouses, and Retail Food Refrigeration, Retrofit and New.	Self-Chilling Cans-Using HFC-134a or HFC-152a.	Unacceptable	Unacceptably high greenhouse gas emissions from direct release of refrigerant to the atmosphere.

[64 FR 10378, Mar. 3, 1999]

Pt. 82, Subpt. G, App. H

40 CFR Ch. I (7–1–24 Edition)

**APPENDIX H TO SUBPART G OF PART 82—
SUBSTITUTES SUBJECT TO USE RE-
STRICTIONS AND UNACCEPTABLE SUB-
STITUTES, EFFECTIVE MAY 28, 1999**

*CFC-12 Automobile and Non-automobile Motor
Vehicle Air Conditioners, Retrofit and New*

Criteria for Uniqueness of Fittings

(a) All fittings for alternative motor vehicle refrigerants must meet the following requirements:

(1) High-side screw-on fittings for each refrigerant must differ from high-side screw-on fittings for all other refrigerants, including CFC-12, and from low-side screw-on fittings for CFC-12;

(2) Low-side screw-on fittings for each refrigerant must differ from low-side screw-on fittings for all other refrigerants, including CFC-12;

(3) High-side screw-on fittings for a given refrigerant must differ from low-side screw-on fittings for that refrigerant, to protect against connecting a low-pressure system to a high-pressure one;

(4) High-side quick-connect fittings for each refrigerant must differ from high-side quick-connect fittings for all other refrigerants, including CFC-12 (if they exist);

(5) Low-side quick-connect fittings for each refrigerant must differ from low-side quick-connect fittings for all other refrigerants, including CFC-12 (if they exist);

(6) High-side quick-connect fittings for a given refrigerant must differ from low-side quick-connect fittings for that refrigerant, to protect against connecting a low-pressure system to a high-pressure one;

(7) For each type of container, the fitting for each refrigerant must differ from the fitting for that type of container for all other refrigerants, including CFC-12.

(b) For screw-on fittings, “differ” means that either the diameter must differ by at least $\frac{1}{16}$ inch or the thread direction must be reversed (i.e. right-handed vs. left-handed). Simply changing the thread pitch is not sufficient. For quick-connect fittings, “differ” means that a person using normal force and normal tools (including wrenches) must not be able to cross-connect fittings.

(c) The sole exception to the $\frac{1}{16}$ inch difference requirement is the difference between the small can fittings for GHG-X4 and R-406A. The GHG-X4 small can fitting uses a metric measurement, and is slightly less than $\frac{1}{16}$ inch larger than the small can fitting for R-406A. EPA has concluded that these fittings will not cross-connect, and therefore they may be used.

REFRIGERATION AND AIR CONDITIONING—UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Comments
All HCFC-22 end-uses, retrofit and new.	NARM-22	Unacceptable	This blend contains HCFC-22, and it is inappropriate to use such a blend as a substitute for HCFC-22. In addition, this blend contains HFC-23, which has an extremely high GWP and lifetime. Other substitutes for HCFC-22 exist that do not contain either HCFC-22 or HFC-23.

SOLVENTS CLEANING—UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Comments
Metals, Electronic, and Precision cleaning with CFC-113, methyl chloroform, and HCFC-141b.	Chlorobromomethane.	Unacceptable	Other alternatives exist with zero or much lower ODP.

Environmental Protection Agency

Pt. 82, Subpt. G, App. H

FIRE SUPPRESSION AND EXPLOSION PROTECTION—ACCEPTABLE SUBJECT TO NARROWED USE
LIMITS: TOTAL FLOODING AGENTS

End-use	Substitute	Decision	Conditions	Further information
Total flooding	HFC-236fa	Acceptable subject to narrowed use limits.	Acceptable when manufactured using any process that does not convert perfluoroisobutylene (PFIB) directly to HFC-236fa in a single step: for use in explosion suppression and explosion inertion applications, and for use in fire suppression applications where other non-PFC agents or alternatives are not technically feasible due to performance or safety requirements: (a) because of their physical or chemical properties, or (b) where human exposure to the extinguishing agents may result in failure to meet safety guidelines in the latest edition of the NFPA 2001 Standard for Clean Agent Fire Extinguishing Systems.	Use of this agent should be in accordance with the safety guidelines in the latest edition of the NFPA 2001 Standard for Clean Agent Fire Systems. Users should observe the limitations on HFC-236fa acceptability by taking the following measures: (i) conduct an evaluation of foreseeable conditions of end-use; (ii) determine that the physical or chemical properties, or other technical constraints of the other available agents preclude their use; and (iii) determine that human exposure to the other alternative extinguishing agents may result in failure to meet safety guidelines in the latest edition of the NFPA 2001 Standard for Clean Agent Fire Extinguishing Systems. Documentation of such measures should be available for review upon request. The principal environmental characteristic of concern for HFC-236fa is its high GWP of 9400 and long atmospheric lifetime of 226 years. Actual contributions to global warming depend upon the quantities emitted. See additional comments 1, 2, 3, 4, 5.
Total flooding	C ₃ F ₈	Acceptable subject to narrowed use limits.	Acceptable for nonresidential uses where other alternatives are not technically feasible due to performance or safety requirements: (a) because of their physical or chemical properties, or (b) where human exposure to the extinguishing agents may result in failure to meet safety guidelines in the latest edition of the NFPA 2001 Standard for Clean Agent Fire Extinguishing Systems.	Use of this agent should be in accordance with the safety guidelines in the latest edition of the NFPA 2001 Standard for Clean Agent Fire Extinguishing Systems. Users should observe the limitations on PFC acceptability by taking the following measures: (i) conduct an evaluation of foreseeable conditions of end-use; (ii) determine that the physical or chemical properties or other technical constraints of the other available agents preclude their use; and (iii) determine that human exposure to the other alternative extinguishing agents may result in failure to meet safety guidelines in the latest edition of the NFPA 2001 Standard for Clean Agent Fire Extinguishing Systems. Documentation of such measures should be available for review upon request. The principal environmental characteristic of concern for PFCs is that they have high GWPs and long atmospheric lifetimes. Actual contributions to global warming depend upon the quantities of PFCs emitted. See additional comments 1, 2, 3, 4, 5.

FIRE SUPPRESSION AND EXPLOSION PROTECTION—ACCEPTABLE SUBJECT TO NARROWED USE
LIMITS: TOTAL FLOODING AGENTS—Continued

End-use	Substitute	Decision	Conditions	Further information
Total flooding	C ₄ F ₁₀	Acceptable subject to narrowed use limits	Acceptable for nonresidential uses where other alternatives are not technically feasible due to performance or safety requirements: (a) because of their physical or chemical properties, or (b) where human exposure to the extinguishing agents may result in failure to meet safety guidelines in the latest edition of the NFPA 2001 Standard for Clean Agent Fire Extinguishing Systems	Use of this agent should be in accordance with the safety guidelines in the latest edition of the NFPA 2001 Standard for Clean Agent Fire Extinguishing Systems. Users should observe the limitations on PFC acceptability by taking the following measures: (i) conduct an evaluation of foreseeable conditions of end-use; (ii) determine that the physical or chemical properties or other technical constraints of the other available agents preclude their use; and (iii) determine that human exposure to the other alternative extinguishing agents may result in failure to meet safety guidelines in the latest edition of the NFPA 2001 Standard for Clean Agent Fire Extinguishing Systems Documentation of such measures should be available for review upon request. The principal environmental characteristic of concern for PFCs is that they have high GWPs and long atmospheric lifetimes. Actual contributions to global warming depend upon the quantities of PFCs emitted. See additional comments 1, 2, 3, 4, 5.

Additional comments:

- 1—Should conform with relevant OSHA requirements, including 29 CFR 1910, Subpart L, Sections 1910.160 and 1910.162.
- 2—Per OSHA requirements, protective gear (SCBA) should be available in the event personnel should reenter the area.
- 3—Discharge testing should be strictly limited to that which is essential to meet safety or performance requirements.
- 4—The agent should be recovered from the fire protection system in conjunction with testing or servicing, and recycled for later use or destroyed.
- 5—EPA has no intention of duplicating or displacing OSHA coverage related to the use of personal protective equipment (e.g., respiratory protection), fire protection, hazard communication, worker training or any other occupational safety and health standard with respect to halon substitutes.

Environmental Protection Agency

Pt. 82, Subpt. G, App. H

FIRE SUPPRESSION AND EXPLOSION PROTECTION—STREAMING AGENTS—ACCEPTABLE SUBJECT TO NARROWED USE LIMITS

End-use	Substitute	Decision	Conditions	Comments
Halon 1211 replacement	C6F14	Acceptable for nonresidential uses where other alternatives are not technically feasible due to performance or safety requirements: (a) because of their physical or chemical properties, or (b) where human exposure to the extinguishing agents may result in failure to meet applicable use conditions.		Users should observe the limitations on PFC acceptability by taking the following measures: (i) conduct an evaluation of foreseeable conditions of end-use; (ii) determine that the physical or chemical properties or other technical constraints of the other available agents preclude their use; and (iii) determine that human exposure to the other alternative extinguishing agents may result in failure to meet applicable use conditions. Documentation of such measures should be available for review upon request. The principal environmental characteristic of concern for PFCs is that they have high GWPs and long atmospheric lifetimes. Actual contributions to global warming depend upon the quantities of PFCs emitted. For additional guidance regarding applications in which PFCs may be appropriate, users should consult the description of potential uses which is included in the March 18, 1994 Final Rule (59 FR 13044.) See comments 1, 2.
Halon 1211 replacement.	HFC-236fa	Acceptable in nonresidential uses when manufactured using any process that does not convert perfluoroisobutylene (PFIB) directly to HFC-236fa in a single step		See comments 1, 2, 3.
Halon 1211 replacement. Additional comments:	HFC-227ea	Acceptable in nonresidential uses only		See comments 1, 2.

1—Discharge testing and training should be strictly limited only to that which is essential to meet safety or performance requirements.

2—The agent should be recovered from the fire protection system in conjunction with testing or servicing, and recycled for later use or destroyed.

3—Acceptable for local application systems inside textile process machinery.

FIRE SUPPRESSION AND EXPLOSION PROTECTION—TOTAL FLOODING AGENTS—UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Comments
Halon 1301 replacement	Chlorobromomethane.	Unacceptable	Other alternatives exist with zero or lower ODP; OSHA regulations prohibit its use as extinguishing agent in fixed extinguishing systems where employees may be exposed. See 29 CFR 1910.160(b)(11).

AEROSOLS—UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Comments
Solvent in aerosols with CFC-113, MCF, or HCFC-141b.	Chlorobromomethane.	Unacceptable	Other alternatives exist with zero or much lower ODP.

ADHESIVES, COATINGS, AND INKS—UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Comments
Solvent in adhesives, coatings, and inks with CFC-113.	Chlorobromomethane.	Unacceptable	Other alternatives exist with zero or much lower ODP.
Solvent in adhesives, coatings, and inks with MCF.	Chlorobromomethane.	Unacceptable	Other alternatives exist with zero or much lower ODP.
Solvent in adhesives, coatings and inks with HCFC-141b.	Chlorobromomethane.	Unacceptable	Other alternatives exist with zero or much lower ODP.

[64 FR 22996, Apr. 28, 1999, as amended at 67 FR 4201, Jan. 29, 2002]

APPENDIX I TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS, LISTED IN THE APRIL 26, 2000, FINAL RULE, EFFECTIVE MAY 26, 2000

FIRE SUPPRESSION AND EXPLOSION PROTECTION—STREAMING AGENTS

[Substitutes Acceptable Subject to Narrowed Use Limits]

End Use	Substitute	Decision	Limitations	Comments
Halon 1211 Streaming Agents.	HCFC Blend E.	Acceptable ..	Nonresidential uses only	As with other streaming agents, EPA recommends that potential risks of combustion byproducts be labeled on the extinguisher (see UL 2129). See additional comments 1, 2.

Additional Comments:

1. Discharge testing and training should be strictly limited only to that which is essential to meet safety or performance requirements.
2. The agent should be recovered from the fire protection system in conjunction with testing or servicing, and recycled for later use or destroyed.

[65 FR 24392, Apr. 26, 2000, as amended at 67 FR 4202, Jan. 29, 2002]

APPENDIX J TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE JANUARY 29, 2002 FINAL RULE, EFFECTIVE APRIL 1, 2002

FIRE SUPPRESSION AND EXPLOSION PROTECTION SECTION—TOTAL FLOODING SUBSTITUTES—ACCEPTABLE SUBJECT TO NARROWED USE LIMITS

End-use	Substitute	Decision	Conditions	Further information
Total flooding.	HFC Blend B (Halotron II [®]).	Acceptable subject to narrowed use limits.	Acceptable in areas that are not normally occupied only.	See additional comments 1, 2, 3, 4, 5.

Additional comments:

- 1—Should conform to relevant OSHA requirements, including 29 CFR 1910, subpart L, Sections 1910.160 and 1910.162.
- 2—Per OSHA requirements, protective gear (SCBA) should be available in the event personnel should reenter the area.
- 3—Discharge testing should be strictly limited to that which is essential to meet safety or performance requirements.
- 4—The agent should be recovered from the fire protection system in conjunction with testing or servicing, and recycled for later use or destroyed.
- 5—EPA has no intention of duplicating or displacing OSHA coverage related to the use of personal protective equipment (e.g., respiratory protection), fire protection, hazard communication, worker training or any other occupational safety and health standard with respect to halon substitutes.

FIRE SUPPRESSION AND EXPLOSION PROTECTION SECTOR—TOTAL FLOODING SUBSTITUTES—UNACCEPTABLE SUBSTITUTES

End-Use	Substitute	Decision	Further Information
Halon 1301	HBFC–22B1 ..	Unacceptable	HBFC–22B1 is a Class I ozone depleting substance with an ozone depletion potential of 0.74.
Total Flooding Agents.			The manufacturer of this agent terminated production of this agent January 1, 1996, except for critical uses, and removed it from the market because it is a fetal toxin.

[67 FR 4202, Jan. 29, 2002, as amended at 71 FR 56367, Sept. 27, 2006]

Environmental Protection Agency

Pt. 82, Subpt. G, App. L

APPENDIX K TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES LISTED IN THE JULY 22, 2002, FINAL RULE EFFECTIVE AUGUST 21, 2002

FOAM BLOWING—UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Comments
Replacements for HCFC-141b in the following rigid polyurethane/polyisocyanurate applications: —Boardstock —Appliance —Spray	HCFC-22, HCFC-142b and blends thereof.	Unacceptable Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before December 1, 2017 may be used after that date.	Alternatives exist with lower or zero-ODP.
All foam end-uses	HCFC-124	Unacceptable Closed cell foam products and products containing closed cell foams manufactured with this substitute on or before December 1, 2017 may be used after that date.	Alternatives exist with lower or zero-ODP.

[81 FR 86883, Dec. 1, 2016]

APPENDIX L TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE JANUARY 27, 2003, FINAL RULE, EFFECTIVE MARCH 28, 2003

FIRE SUPPRESSION AND EXPLOSION PROTECTION SECTOR—TOTAL FLOODING SUBSTITUTES—ACCEPTABLE SUBJECT TO USE CONDITIONS

End-use	Substitute	Decision	Conditions	Comments
Total flooding	HFC227-BC	Acceptable subject to use conditions.	Sodium bicarbonate release in all settings should be targeted so that increased pH level would not adversely affect exposed individuals. Users should provide special training to individuals required to be in environments protected by HFC227-BC extinguishing systems. Each HFC227-BC extinguisher should be clearly labelled with the potential hazards from use and safe handling procedures.	Use of the agent, HFC-227ea, should be in accordance with the safety guidelines in the latest edition of the NFPA 2001 Standard for Clean Agent Fire Extinguishing Systems. See additional comments 1, 2, 3, 4, 5.

Additional comments.
1—Should conform with relevant OSHA requirements, including 29 CFR part 1910, subpart L, sections 1910.160 and 1910.162.
2—Per OSHA requirements, protective gear (SCBA) should be available in the event personnel should reenter the area.
3—Discharge testing should be strictly limited to that which is essential to meet safety or performance requirements.
4—The agent should be recovered from the fire protection system in conjunction with testing or servicing, and recycled for later use or destroyed.
5—EPA has no intention of duplicating or displacing OSHA coverage related to the use of personal protective equipment (e.g., respiratory protection), fire protection, hazard communication, worker training or any other occupational safety and health standard with respect to halon substitutes.

FIRE SUPPRESSION AND EXPLOSION PROTECTION SECTOR—STREAMING AGENTS—ACCEPTABLE
SUBJECT TO NARROWED USE LIMITS

End-use	Substitute	Decision	Conditions	Comments
Streaming	C6-perfluoroketone (FK-5-1-12MYY2).	Acceptable subject to narrowed use limits.	For use only in non- residential areas.	For operations that fill canisters to be used in streaming appli- cations, EPA recommends the following: —Adequate ventilation should be in place; —All spills should be cleaned up immediately in accordance with good industrial hygiene prac- tices; and —Training for safe handling pro- cedures should be provided to all employees that would be likely to handle containers of the agent or extinguishing units filled with the agent. See additional comments 1, 2, 3, 4.
Streaming	H Galden HFPEs	Acceptable subject to narrowed use limits.	For use only in non- residential areas.	For operations that fill canisters to be used in streaming appli- cations, EPA recommends the following: —Adequate ventilation should be in place; —All spills should be cleaned up immediately in accordance with good industrial hygiene prac- tices; and —Training for safe handling pro- cedures should be provided to all employees that would be likely to handle containers of the agent or extinguishing units filled with the agent. See additional comments 1, 2, 3, 4.

Additional comments.

1—Discharge testing should be strictly limited to that which is essential to meet safety or performance requirements.

2—The agent should be recovered from the fire protection system in conjunction with testing or servicing, and recycled for later use or destroyed.

3—EPA has no intention of duplicating or displacing OSHA coverage related to the use of personal protective equipment (e.g., respiratory protection), fire protection, hazard communication, worker training or any other occupational safety and health standard with respect to halon substitutes.

4—As with other streaming agents, EPA recommends that potential risks of combustion by-products be labelled on the extinguisher (see UL 2129)

[68 FR 4010, Jan. 27, 2003]

Environmental Protection Agency

Pt. 82, Subpt. G, App. O

APPENDIX M TO SUBPART G OF PART 82—UNACCEPTABLE SUBSTITUTES LISTED IN THE
SEPTEMBER 30, 2004 FINAL RULE, EFFECTIVE NOVEMBER 29, 2004

FOAM BLOWING—UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Comments
All foam end-uses: —rigid polyurethane and polyisocyanurate laminated boardstock —rigid polyurethane appliance —rigid polyurethane spray and commercial refrigeration, and sandwich panels —rigid polyurethane slabstock and other foams —polystyrene extruded insulation boardstock and billet —phenolic insulation board and bunstock —flexible polyurethane —polystyrene extruded sheet —Except for:¹ —space vehicle —nuclear —defense —research and development for foreign customers	HCFC-141b	Unacceptable Closed cell foam products and products containing closed cell foams manufactured with this substitute on or before December 1, 2017 may be used after that date.	Alternatives exist with lower or zero-ODP.

¹Exemptions for specific applications are identified in the list of acceptable substitutes, which is available on the SNAP Web site at: <https://www.epa.gov/snap/foam-blowing-agents>.

[81 FR 86883, Dec. 1, 2016]

APPENDIX N TO SUBPART G OF PART 82 [RESERVED]

APPENDIX O TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE SEPTEMBER 27,
2006 FINAL RULE, EFFECTIVE NOVEMBER 27, 2006

FIRE SUPPRESSION AND EXPLOSION PROTECTION SECTOR—TOTAL FLOODING SUBSTITUTES—
ACCEPTABLE SUBJECT TO USE CONDITIONS

End-use	Substitute	Decision	Conditions	Further information
Total flooding	Gelled Halocarbon/ Dry Chemical Suspension (Envirogel) with sodium bicarbonate additive.	Acceptable subject to use conditions.	Use of which-ever hydrofluorocarbon gas (HFC-125, HFC-227ea, or HFC-236fa) is employed in the formulation must be in accordance with all requirements for acceptability (i.e., narrowed use limits) of that HFC under EPA's SNAP program.	Use of this agent should be in accordance with the safety guidelines in the latest edition of the NFPA 2001 Standard for Clean Agent Fire Extinguishing Systems, for which-ever hydrofluorocarbon gas is employed, and the latest edition of the NFPA 2010 standard for Aerosol Extinguishing Systems. Sodium bicarbonate release in all settings should be targeted so that increased blood pH level would not adversely affect exposed individuals.

FIRE SUPPRESSION AND EXPLOSION PROTECTION SECTOR—TOTAL FLOODING SUBSTITUTES—
ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Conditions	Further information
Total flooding	Phosphorous Tribromide (PBr ₃).	Acceptable subject to use conditions.	For use only in aircraft engine nacelles.	Users should provide special training, including the potential hazards associated with the use of the HFC agent and sodium bicarbonate, to individuals required to be in environments protected by Envirogel with sodium bicarbonate additive extinguishing systems. Each extinguisher should be clearly labeled with the potential hazards from use and safe handling procedures. See additional comments 1, 2, 3, 4, 5. For establishments manufacturing the agent or filling, installing, or servicing containers or systems, EPA recommends the following: —adequate ventilation should be in place and/or positive pressure, self-contained breathing apparatus (SCBA) should be worn; —training for safe handling procedures should be provided to all employees that would be likely to handle containers of the agent or extinguishing units filled with the agent; and —all spills should be cleaned up immediately in accordance with good industrial hygiene practices. See additional comments 1, 2, 3, 4, 5.

Additional comments:

1—Should conform to relevant OSHA requirements, including 29 CFR 1910, Subpart L, Sections 1910.160 and 1910.162.

2—Per OSHA requirements, protective gear (SCBA) should be available in the event personnel should reenter the area.

3—Discharge testing should be strictly limited to that which is essential to meet safety or performance requirements.

4—The agent should be recovered from the fire protection system in conjunction with testing or servicing, and recycled for later use or destroyed.

5—EPA has no intention of duplicating or displacing OSHA coverage related to the use of personal protective equipment (e.g., respiratory protection), fire protection, hazard communication, worker training or any other occupational safety and health standard with respect to halon substitutes.

[71 FR 56367, Sept. 27, 2006, as amended at 81 FR 86883, Dec. 1, 2016; 86 FR 24471, May 6, 2021]

Environmental Protection Agency

Pt. 82, Subpt. G, App. Q

APPENDIX P TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE SEPTEMBER 27, 2006 FINAL RULE, EFFECTIVE NOVEMBER 27, 2006

FIRE SUPPRESSION AND EXPLOSION PROTECTION SECTOR—TOTAL FLOODING AGENTS—ACCEPTABLE
SUBJECT TO NARROWED USE LIMITS

End-use	Substitute	Decision	Conditions	Further information
Total flooding	Gelled Halocarbon/ Dry Chemical Suspension with any agent other than ammonium polyphosphate or sodium bicarbonate additive (Envirogel with sodium bicarbonate additive).	Acceptable subject to narrowed use limits.	For use only in normally unoccupied areas.	Use of this agent should be in accordance with the safety guidelines in the latest edition of the NFPA 2001 Standard for Clean Agent Fire Extinguishing Systems, for whichever hydrofluorocarbon gas is employed. Envirogel is listed as a streaming substitute under the generic name Gelled Halocarbon/Dry Chemical Suspension. Envirogel was also previously listed as a total flooding substitute under the same generic name. EPA has found Envirogel with the ammonium polyphosphate additive and Envirogel with the sodium bicarbonate additive to be acceptable as total flooding agents in both occupied and unoccupied areas. See additional comments 1, 2, 3, 4, 5

Additional comments:
1—Should conform to relevant OSHA requirements, including 29 CFR 1910, subpart L, Sections 1910.160 and 1910.162.
2—Per OSHA requirements, protective gear (SCBA) should be available in the event personnel should reenter the area.
3—Discharge testing should be strictly limited to that which is essential to meet safety or performance requirements.
4—The agent should be recovered from the fire protection system in conjunction with testing or servicing, and recycled for later use or destroyed.
5—EPA has no intention of duplicating or displacing OSHA coverage related to the use of personal protective equipment (e.g., respiratory protection), fire protection, hazard communication, worker training or any other occupational safety and health standard with respect to halon substitutes.

[71 FR 56367, Sept. 27, 2006]

APPENDIX Q TO SUBPART G OF PART 82—UNACCEPTABLE SUBSTITUTES LISTED IN THE MARCH 28, 2007 FINAL RULE, EFFECTIVE MAY 29, 2007

FOAM BLOWING UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Further information
—Rigid polyurethane commercial refrigeration. —Rigid polyurethane sandwich panels ... —Rigid polyurethane slabstock and other foams.	HCFC-22, HCFC-142b as substitutes for HCFC-141b.	Unacceptable ¹ Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before December 1, 2017 may be used after that date.	Alternatives exist with lower or zero-ODP.

FOAM BLOWING UNACCEPTABLE SUBSTITUTES—Continued

End-use	Substitute	Decision	Further information
—Rigid polyurethane and polyisocyanurate laminated boardstock. —Rigid polyurethane appliance —Rigid polyurethane spray and commercial refrigeration, and sandwich panels. —Rigid polyurethane slabstock and other foams. —Polystyrene extruded insulation boardstock and billet. —Phenolic insulation board and bunstock. —Flexible polyurethane —Polystyrene extruded sheet	HCFC-22, HCFC-142b as substitutes for CFCs.	Unacceptable ² Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before December 1, 2017 may be used after that date.	Alternatives exist with lower or zero-ODP.

¹For existing users of HCFC-22 and HCFC-142b as of November 4, 2005 other than in marine applications, the unacceptability determination is effective on March 1, 2008; for existing users of HCFC-22 and HCFC-142b as of November 4, 2005 in marine applications, including marine flotation foam, the unacceptability determination is effective on September 1, 2009. For an existing user of HCFC-22 or HCFC-142b that currently operates in only one facility that it does not own, and is scheduled to transition to a non-ODS, flammable alternative to coincide with a move to a new facility and installation of new process equipment that cannot be completed by March 1, 2008, the unacceptability determination is effective January 1, 2010.

²For existing users of HCFC-22 and HCFC-142b in polystyrene extruded insulation boardstock and billet and the other foam end-uses, as of November 4, 2005, the unacceptability determination is effective on January 1, 2010.

[81 FR 86885, Dec. 1, 2016]

APPENDIX R TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS LISTED IN THE DECEMBER 20, 2011, FINAL RULE, EFFECTIVE FEBRUARY 21, 2012, AND IN THE APRIL 10, 2015 FINAL RULE, EFFECTIVE MAY 11, 2015, AND IN THE APRIL 28, 2023 FINAL RULE, EFFECTIVE MAY 30, 2023

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS

End-use	Substitute	Decision	Use conditions	Further information
1. Household refrigerators, freezers, and combination refrigerators and freezers (New equipment only).	Isobutane (R-600a) Propane (R-290) R-441A.	Acceptable subject to use conditions.	As of September 7, 2018: These refrigerants may be used only in new equipment designed specifically and clearly identified for the refrigerant (<i>i.e.</i> , none of these substitutes may be used as a conversion or “retrofit” refrigerant for existing equipment designed for a different refrigerant). These refrigerants may be used only in a refrigerator or freezer, or combination refrigerator and freezer, that meets all requirements listed in UL 60335–2–24. ^{1 2 6}	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
2. Retail food refrigerators and freezers (stand-alone units only) (New equipment only).	Isobutane (R-600a) Propane (R-290) R-441A.	Acceptable substitute to use conditions.	As provided in clauses SB6.1.2 to SB6.1.5 of UL 471, ^{1,2,3} the following markings must be attached at the locations provided and must be permanent: (a) On or near any evaporators that can be contacted by the consumer: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. Do Not Use Mechanical Devices To Defrost Refrigerator. Do Not Puncture Refrigerant Tubing." (b) Near the machine compartment: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (c) Near the machine compartment: "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed."	Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling these refrigerants. Special care should be taken to avoid contact with the skin since these refrigerants, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on refrigerators and freezers with these refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service refrigerators and freezers containing these refrigerants. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. If a service port is added then retail food refrigerators and freezers using these refrigerants should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. "Differ" means that either the diameter differs by at least 1/16 inch or the thread direction is reversed (<i>i.e.</i> , right-handed vs. left-handed). These different fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit, and should not be accessed with an adaptor.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(d) On the exterior of the refrigerator: "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (e) Near any and all exposed refrigerant tubing: "CAUTION—Risk of Fire or Explosion Due To Puncture Of Refrigerant Tubing; Follow Handling Instructions Carefully. Flammable Refrigerant Used." All of these markings must be in letters no less than 6.4 mm ($\frac{1}{4}$ inch) high. The refrigerator or freezer must have red, Pantone® Matching System (PMS) #185 marked pipes, hoses, and other devices through which the refrigerant is serviced, typically known as the service port, to indicate the use of a flammable refrigerant. This color must be present at all service ports and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes). The color mark must extend at least 2.5 centimeters (1 inch) from the compressor and must be replaced if removed.	

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
3. Very low temperature refrigeration Non-mechanical heat transfer (New equipment only).	Ethane (R-170).	Acceptable subject to use conditions.	This refrigerant may be used only in new equipment specifically designed and clearly identified for the refrigerant (i.e., the substitute may not be used as a conversion or "retrofit" refrigerant for existing equipment designed for other refrigerants). This refrigerant may only be used in equipment that meets all requirements in Supplement SB to UL 471.^{1 2 3} In cases where listing 3 of this table includes requirements more stringent than those of UL 471, the appliance must meet the requirements of listing 3 of this table in place of the requirements in UL 471. The charge size for the equipment must not exceed 150 g (5.29 oz) in each circuit. As provided in clauses SB6.1.2 to SB6.1.5 of UL 471,^{1 2 3} the following markings must be attached at the locations provided and must be permanent: (a) On or near any evaporators that can be contacted by the consumer: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. Do Not Use Mechanical Devices To Defrost Refrigerator. Do Not Puncture Refrigerant Tubing."	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling ethane. Special care should be taken to avoid contact with the skin since ethane, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Sub- stitute	Deci- sion	Use conditions	Further information
			(b) Near the machine compartment: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (c) Near the machine compartment: "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." (d) On the exterior of the refrigerator: "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (e) Near any and all exposed refrigerant tubing: "CAUTION—Risk of Fire or Explosion Due To Puncture Of Refrigerant Tubing; Follow Handling Instructions Carefully. Flammable Refrigerant Used." All of these markings must be in letters no less than 6.4 mm ($\frac{1}{4}$ inch) high. The refrigeration equipment must have red, Pantone® Matching System (PMS) #185 marked pipes, hoses, and other devices through which the refrigerant is serviced, typically known as the service port, to indicate the use of a flammable refrigerant. This color must be present at all service ports and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes). The color mark must extend at least 2.5 centimeters (1 inch) from the compressor and must be replaced if removed.	Technicians should only use spark-proof tools when working on equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service equipment containing ethane. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. If a service port is added then refrigeration equipment using this refrigerant should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. "Differ" means that either the diameter differs by at least $\frac{1}{16}$ inch or the thread direction is reversed (i.e., right-handed vs. left-handed). These different fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit, and should not be accessed with an adaptor. Example of non-mechanical heat transfer using this refrigerant would be use in a secondary loop of a thermosiphon.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
4. Vending Machines (New equipment only).	Isobutane (R-600a) Propane (R-290) R-441A.	Acceptable subject to use conditions.	These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerants (i.e., none of these substitutes may be used as a conversion or "retrofit" refrigerant for existing equipment designed for other refrigerants). Detaching and replacing the old refrigeration circuit from the outer casing of the equipment with a new one containing a new evaporator, condenser, and refrigerant tubing within the old casing is considered "new" equipment and not a retrofit of the old, existing equipment. These substitutes may only be used in equipment that meets all requirements in Supplement SA to UL 541.^{1,2,5} In cases where listing 4 of this table includes requirements more stringent than those of UL 541, the appliance must meet the requirements of listing 4 of this table in place of the requirements in UL 541. The charge size for vending machines must not exceed 150 g (5.29 oz) in each circuit. As provided in clauses SA6.1.2 to SA6.1.5 of UL 541,^{1,2,5} the following markings must be attached at the locations provided and must be permanent:	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling these refrigerants. Special care should be taken to avoid contact with the skin since these refrigerants, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Sub- stitute	Deci- sion	Use conditions	Further information
			(a) On or near any evaporators that can be contacted by the consumer: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. Do Not Use Mechanical Devices To Defrost Refrigerator. Do Not Puncture Refrigerant Tubing." (b) Near the machine compartment: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (c) Near the machine compartment: "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." (d) On the exterior of the refrigerator: "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (e) Near any and all exposed refrigerant tubing: "CAUTION—Risk of Fire or Explosion Due To Puncture Of Refrigerant Tubing; Follow Handling Instructions Carefully. Flammable Refrigerant Used." All of these markings must be in letters no less than 6.4 mm ($\frac{1}{4}$ inch) high. The refrigeration equipment must have red, Pantone® Matching System (PMS) #185 marked pipes, hoses, and other devices through which the refrigerant is serviced, typically known as the service port, to indicate the use of a flammable refrigerant. This color must be present at all service ports and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes). The color mark must extend at least 2.5 centimeters (1 inch) from the compressor and must be replaced if removed.	Technicians should only use spark-proof tools when working on refrigeration equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing these refrigerants. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. If a service port is added then refrigeration equipment using this refrigerant should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. "Differ" means that either the diameter differs by at least $\frac{1}{16}$ inch or the thread direction is reversed (<i>i.e.</i>, right-handed vs. left-handed). These different fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit, and should not be accessed with an adaptor.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
5. Residential and light-commercial air conditioning and heat pumps—self-contained room air conditioners only (New equipment only).	Propane (R-290) R-441A.	Acceptable subject to use conditions.	These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerants (i.e., none of these substitutes may be used as a conversion or “retrofit” refrigerant for existing equipment designed for other refrigerants). These refrigerants may only be used in equipment that meets all requirements in Supplement SA and Appendices B through F of UL 484.^{1,2,4} In cases where listing 5 includes requirements more stringent than those of UL 484, the appliance must meet the requirements of listing 5 of this table in place of the requirements in UL 484. The charge size for the entire air conditioner must not exceed the maximum refrigerant mass determined according to Appendix F of UL 484 for the room size where the air conditioner is used. The charge size for these three refrigerants must in no case exceed 1,000 g (35.3 oz or 2.21 lbs) of propane or 1,000 g (35.3 oz or 2.21 lb) of R-441A. For portable air conditioners, the charge size must in no case exceed 300 g (10.6 oz or 0.66 lbs) of propane or 330 g (11.6 oz or 0.72 lb) of R-441A. The manufacturer must design a charge size for the entire air conditioner that does not exceed the amount specified for the unit's cooling capacity, as specified in table A, B, C, D, or E of this appendix R.	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling these refrigerants. Special care should be taken to avoid contact with the skin since these refrigerants, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Sub- stitute	Deci- sion	Use conditions	Further information
			As provided in clauses SA6.1.2 to SA6.1.5 of UL 484,^{1,2,4} the following markings must be attached at the locations provided and must be permanent: (a) On the outside of the air conditioner: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (b) On the outside of the air conditioner: "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (c) On the inside of the air conditioner near the compressor: "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." (d) On the outside of each portable air conditioner: "WARNING: Appliance shall be installed, operated and stored in a room with a floor area larger the "X" m² (Y ft²)." The value "X" on the label must be determined using the minimum room size in m² calculated using Appendix F of UL 484. For R-441A, use a lower flammability limit of 0.041 kg/m³ in calculations in Appendix F of UL 484. All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The air conditioning equipment must have red, Pantone® Matching System (PMS) #185 marked pipes, hoses, and other devices through which the refrigerant is serviced, typically known as the service port, to indicate the use of a flammable refrigerant. This color must be present at all service ports and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes). The color mark must extend at least 2.5 centimeters (1 inch) from the compressor and must be replaced if removed.	Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing these refrigerants. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. If a service port is added then air conditioning equipment using this refrigerant should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. "Differ" means that either the diameter differs by at least ¼₁₆ inch or the thread direction is reversed (i.e., right-handed vs. left-handed). These different fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit, and should not be accessed with an adaptor. Air conditioning equipment in this category includes: Window air conditioning units. Portable room air conditioners. Packaged terminal air conditioners and heat pumps.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
6. Residential and light-commercial air conditioning and heat pumps—self-contained room air conditioners only (New equipment only) manufactured from May 10, 2015 and up to but not including May 30, 2023.	HFC-32	Acceptable subject to use conditions.	This refrigerant may be used only in new equipment specifically designed and clearly identified for the refrigerant (i.e., this substitute may not be used as a conversion or "retrofit" refrigerant for existing equipment designed for other refrigerants). This refrigerant may only be used in equipment that meets all requirements in Supplement SA and Appendices B through F of UL 484.^{1,2,4} In cases where this listing 6 of this table includes requirements more stringent than those of UL 484, the appliance must meet the requirements of listing 6 of this table in place of the requirements in UL 484. The charge size for the entire air conditioner must not exceed the maximum refrigerant mass determined according to Appendix F of UL 484 for the room size where the air conditioner is used. The manufacturer must design a charge size for the entire air conditioner that does not exceed the amount specified for the unit's cooling capacity, as specified in table A, B, C, D, or E of this appendix. For equipment following this listing 6, and as provided in clauses SA6.1.2 to SA6.1.5 of UL 484,^{1,2,4} the following markings must be attached at the locations provided and must be permanent: (a) On the outside of the air conditioner: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (b) On the outside of the air conditioner: "CAUTION—Risk of Fire or Explosion. Dispose of Properly in Accordance With Federal Or Local Regulations. Flammable Refrigerant Used."	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling these refrigerants. Special care should be taken to avoid contact with the skin since these refrigerants, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing these refrigerants. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
7. Residential and light-commercial air conditioning and heat pumps—self-contained room air conditioners only (New equipment only) manufactured from May 30, 2023 through January 1, 2024.	HFC–32	Acceptable subject to use conditions.	(c) On the inside of the air conditioner near the compressor: "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." (d) On the outside of each portable air conditioner: "WARNING: Appliance shall be installed, operated and stored in a room with a floor area larger than "X" m² (Y ft²). The value "X" on the label must be determined using the minimum room size in m² calculated using Appendix F of UL 484. All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The air conditioning equipment must have red, Pantone® Matching System (PMS) #185 marked pipes, hoses, and other devices through which the refrigerant is serviced, typically known as the service port, to indicate the use of a flammable refrigerant. This color must be present at all service ports and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes). The color mark must extend at least 2.5 centimeters (1 inch) from the compressor and must be replaced if removed. This refrigerant may only be used in equipment that meets all requirements in either: (1) Supplement SA and Appendices B through F of UL 484^{1 2 4} and listing 6 of this table, or (2) UL 60335–2–40^{1 2 7} and listing 8 of this table.	Room occupants should evacuate the space immediately following the accidental release of this refrigerant. If a service port is added then air conditioning equipment using this refrigerant should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. "Differ" means that either the diameter differs by at least ⅛ inch or the thread direction is reversed (i.e., right-handed vs. left-handed). These different fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit, and should not be accessed with an adaptor. Air conditioning equipment in this category includes: Window air conditioning units. Portable room air conditioners. Packaged terminal air conditioners and heat pumps.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
8. Residential and light-commercial air conditioning and heat pumps—self-contained room airconditioners only (New equipment only) manufactured on or after January 2, 2024.	HFC-32	Acceptable Subject to Use Conditions.	This refrigerant may be used only in new equipment specifically designed and clearly identified for the refrigerant (i.e., this substitute may not be used as a conversion or "retrofit" refrigerant for existing equipment designed for other refrigerants). This substitute may only be used in air conditioning equipment that meets all requirements in UL 60335-2-40^{1 2 7} and this listing 8 of this table. In cases where this listing 8 includes requirements more stringent than those of UL 60335-2-40, the appliance must meet the requirements of this listing 8 in place of the requirements in UL 60335-2-40. The following markings must be attached at the locations provided and must be permanent: (a) On the outside of the equipment: "WARNING—Risk of Fire. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (b) On the outside of the equipment: "WARNING—Risk of Fire. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used."	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(c) On the inside of the equipment near the compressor: "WARNING—Risk of Fire. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting to Service This Product. All Safety Precautions Must be Followed." (d) For any equipment pre-charged at the factory, on the equipment packaging or on the outside of the equipment: "WARNING—Risk of Fire due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations." a. If the equipment is delivered packaged, this label shall be applied on the packaging. b. If the equipment is not delivered packaged, this label shall be applied on the outside of the equipment near the control panel or nameplate. (e) On the equipment near the nameplate: a. At the top of the marking: "Minimum Installation height, X m (W ft)." This marking is only required if required by the UL 60335–2–40. The terms "X" and "W" shall be replaced by the numeric height as calculated per UL 60335–2–40. Note that the formatting here is slightly different than UL 60335–2–40; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.	Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex HH of UL 60335–2–40.²⁷ CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration. Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from residential and light commercial air conditioning appliances are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			b. Immediately below marking (a) of this listing 8 or at the top of the marking if marking (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²). The terms "Y" and "Z" shall be replaced by the numeric area as calculated per UL 60335-2-40. Note that the formatting here is slightly different than UL 60335-2-40; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. (f) For non-fixed equipment, on the outside of the product: "WARNING—Risk of Fire or Explosion—Store in a well-ventilated room without continuously operating flames or other potential ignition." (g) All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The equipment must have red Pantone® Matching System (PMS) #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25 mm) in both directions from such locations and shall be replaced if removed.	

¹ The Director of the Federal Register approves this incorporation by reference (5 U.S.C. 552(a) and 1 CFR part 51). You may inspect a copy at the U.S. EPA or at the National Archives and Records Administration (NARA). Contact the U.S. EPA at: EPA Docket Center, WJC West Building, Room 3334, 1301 Constitution Avenue NW, Washington, DC 20004; www.epa.gov/dockets, (202) 202-1744. For information on the availability of this material at NARA, visit www.archives.gov/federal-register/cfr/ibr-locations.html or email fr.inspection@nara.gov.

² You may obtain the material from: Underwriters Laboratories Inc. (UL) COMM 2000; 151 Eastern Avenue; Bensenville, IL 60106; email: orders@comm-2000.com; phone: 1-888-853-3503 in the U.S. or Canada (other countries +1-415-352-2168); website: <https://ulstandards.ul.com/> or www.comm-2000.com.

³ UL 471. Commercial Refrigerators and Freezers. 10th edition. Supplement SB: Requirements for Refrigerators and Freezers Employing a Flammable Refrigerant in the Refrigerating System. November 24, 2010.

⁴ UL 484. Room Air Conditioners. 8th edition. Supplement SA: Requirements for Room Air Conditioners Employing a Flammable Refrigerant in the Refrigerating System and Appendices B through F. December 21, 2007, with changes through August 3, 2012.

⁵ UL 541. Refrigerated Vending Machines. 7th edition. Supplement SA: Requirements for Refrigerated Vendors Employing a Flammable Refrigerant in the Refrigerating System. December 30, 2011.

⁶ UL 60335–2–24. Standard for Safety: Requirements for Household and Similar Electrical Appliances—Safety—Part 2–24: Particular Requirements for Refrigerating Appliances, Ice-Cream Appliances and Ice-Makers, Second edition, dated April 28, 2017.

⁷ UL 60335–2–40. Standard for Safety: Household And Similar Electrical Appliances—Safety—Part 2–40: Particular Requirements for Electrical Heat Pumps, Air-Conditioners and Dehumidifiers, 3rd edition, Dated November 1, 2019.

Table A. Maximum Design Charge Sizes for Window Air Conditioners

Refrigerant	Maximum design charge size (kg)													
	Associated cooling capacity (BTU/hr)													
	5,000	6,000	7,000	8,000	9,000	10,000	12,000	14,000	18,000	21,000	23,000	24,000	30,000	34,000
R-32	1.73	2.12	2.74	3.00	3.24	3.47	3.68	4.07	4.59	5.48	6.01	6.49	6.72	7.76
R-290	0.13	0.16	0.20	0.22	0.24	0.26	0.27	0.30	0.34	0.40	0.44	0.48	0.50	0.57
R-441A	0.14	0.17	0.22	0.24	0.26	0.28	0.30	0.33	0.37	0.44	0.49	0.53	0.54	0.63

Note: For use with self-contained air conditioning units or heat pumps with an evaporator at least 0.6 and no more than 1.0 m above the floor. Cooling capacities between those in the table are to be linearly interpolated between the next smaller and larger capacities listed in the table.

Table B. Maximum Design Charge Sizes for Packaged Terminal Air Conditioners and Packaged Terminal Heat Pumps

Refrigerant	Maximum design charge size (kg)													
	Associated cooling capacity (BTU/hr)													
	5,000	6,000	7,000	8,000	9,000	10,000	12,000	14,000	18,000	21,000	23,000	24,000	30,000	34,000
R-32	1.04	1.27	1.65	1.80	1.95	2.08	2.21	2.44	2.75	3.29	3.60	3.89	4.03	4.65
R-290	0.08	0.09	0.12	0.13	0.14	0.15	0.16	0.18	0.20	0.24	0.27	0.29	0.30	0.34
R-441A	0.08	0.10	0.13	0.15	0.16	0.17	0.18	0.20	0.22	0.27	0.29	0.32	0.33	0.38

Note: For use with self-contained air conditioning units or heat pumps with an evaporator no more than 0.6 m above the floor. Cooling capacities between those in the table are to be linearly interpolated between the next smaller and larger capacities listed in the table.

Table C. Maximum Design Charge Sizes for Wall-Mounted AC Units

Refrigerant	Maximum Design Charge Size (kg)													
	Associated capacity (BTU/hr)													
	5,000	6,000	7,000	8,000	9,000	10,000	12,000	14,000	18,000	21,000	23,000	24,000	30,000	34,000
R-32	3.12	3.82	4.94	5.41	5.84	6.24	6.62	7.32	7.96	7.96	7.96	7.96	7.96	7.96
R-290	0.23	0.28	0.36	0.40	0.43	0.46	0.49	0.54	0.61	0.73	0.80	0.86	0.89	1.00
R-441A	0.25	0.31	0.40	0.44	0.47	0.51	0.54	0.59	0.67	0.80	0.88	0.95	0.98	1.00

Note: For use with self-contained air conditioners or heat pumps with an evaporator at least 1.0 and no more than 1.8 m above the floor. Cooling capacities between those in the table are to be linearly interpolated between the next smaller and larger capacities listed in the table.

Table D. Maximum Design Charge Sizes for Ceiling-Mounted AC Units

Refrigerant	Maximum Design Charge Size (kg)													
	Associated capacity (BTU/hr)													
	5,000	6,000	7,000	8,000	9,000	10,000	12,000	14,000	18,000	21,000	23,000	24,000	30,000	34,000
R-32	3.82	4.67	6.03	6.61	7.14	7.63	7.96	7.96	7.96	7.96	7.96	7.96	7.96	7.96
R-290	0.28	0.34	0.44	0.49	0.53	0.56	0.60	0.66	0.74	0.89	0.97	1.00	1.00	1.00
R-441A	0.31	0.38	0.49	0.54	0.58	0.62	0.66	0.73	0.82	0.98	1.00	1.00	1.00	1.00

Note: For use with self-contained air conditioners or heat pumps with an evaporator more than 1.8 m above the floor. Cooling capacities between those in the table are to be linearly interpolated between the next smaller and larger capacities listed in the table.

Table E. Maximum Design Charge Sizes for Portable Room AC Units

Refrigerant	Maximum Design Charge Size (kg)													
	Associated capacity (BTU/hr)													
	5,000	6,000	7,000	8,000	9,000	10,000	12,000	14,000	18,000	21,000	23,000	24,000	30,000	34,000
R-32	1.56	2.35	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45
R-290	0.19	0.29	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30
R-441A	0.21	0.31	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33

Note: For use with non-fixed portable room air conditioners or heat pumps. Cooling capacities between those in the table are to be linearly interpolated between the next smaller and larger capacities listed in the table.

[80 FR 19491, Apr. 10, 2015, as amended at 83 FR 38975, Aug. 8, 2018; 88 FR 26418, Apr. 28, 2023]

EFFECTIVE DATE NOTE: At 89 FR 50463, June 13, 2024, appendix R to subpart G of part 82 was amended by revising the heading and the table titled, “Substitutes That Are Acceptable Subject to Use Conditions”, effective July 15, 2024. For the convenience of the user, the revised text is set forth as follows:

APPENDIX R TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS LISTED IN THE DECEMBER 20, 2011, FINAL RULE, EFFECTIVE FEBRUARY 21, 2012, IN THE APRIL 10, 2015, FINAL RULE, EFFECTIVE MAY 11, 2015, IN THE APRIL 28, 2023, FINAL RULE, EFFECTIVE MAY 30, 2023, AND IN THE JUNE 13, 2024, FINAL RULE, EFFECTIVE JULY 15, 2024

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS

End-use	Substitute	Decision	Use conditions	Further information
1. Household refrigerators, freezers, and combination refrigerators and freezers (New equipment only).	Isobutane (R-600a), Propane (R-290), R-441A.	Acceptable subject to use conditions.	As of September 7, 2018: These refrigerants may be used only in new equipment designed specifically and clearly identified for the refrigerant (<i>i.e.</i> , none of these substitutes may be used as a conversion or “retrofit” refrigerant for existing equipment designed for a different refrigerant). These refrigerants may be used only in a refrigerator or freezer, or combination refrigerator and freezer, that meets requirements listed in UL 60335–2–24. ^{1 2 6}	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation), 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling these refrigerants. Special care should be taken to avoid contact with the skin since these refrigerants, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on refrigerators and freezers with these refrigerants.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
2. Retail Food Refrigeration—stand-alone units only (New equipment only) manufactured on or after February 21, 2012, and up to but not including 7/15/2024.	Isobutane (R-600a) Propane (R-290) R-441A.	Acceptable subject to use conditions.	These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerants (<i>i.e.</i>, none of these substitutes may be used as a conversion or “retrofit” refrigerant for existing equipment designed for other refrigerants). These substitutes may only be used in equipment that meets requirements in Supplement SB to UL 471.^{1,2,3} In cases where this listing 2 includes requirements more stringent than those of UL 471, the appliance must meet the requirements of this listing 2 in place of the requirements in the UL Standard. The charge size for the retail food refrigerator or freezer shall not exceed 150 grams (5.3 ounces) in each circuit. As provided in clauses SB6.1.2 to SB6.1.5 of UL 471,^{1,2,3} the following markings shall be attached at the locations provided and shall be permanent:	Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service refrigerators and freezers containing these refrigerants. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective

- (a) On or near any evaporators that can be contacted by the consumer: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. Do Not Use Mechanical Devices To Defrost Refrigerator. Do Not Puncture Refrigerant Tubing."
 - (b) Near the machine compartment: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing."
 - (c) Near the machine compartment: "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed."
 - (d) On the exterior of the refrigerator: "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used."
 - (e) Near any and all exposed refrigerant tubing: "CAUTION—Risk of Fire or Explosion Due To Puncture Of Refrigerant Tubing; Follow Handling Instructions Carefully. Flammable Refrigerant Used."
- All of these markings shall be in letters no less than 6.4 mm (¼ inch) high.
- The refrigerator or freezer must have red, Pantone® Matching System #185 or RAL 3020 marked pipes, hoses, and other devices through which the refrigerant is serviced, typically known as the service port, to indicate the use of a flammable refrigerant. This color must be present at all service ports and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes). The color mark must extend at least 2.5 centimeters (1 inch) from the compressor and must be replaced if removed.

equipment, including chemical goggles and protective gloves, when handling propane. Special care should be taken to avoid contact with the skin since propane, like many refrigerants, can cause freeze burns on the skin.

A Class B dry powder type fire extinguisher should be kept nearby.

Technicians should only use spark-proof tools when working on refrigerators and freezers with propane.

Recovery equipment designed for flammable refrigerants should be used.

Only technicians specifically trained in handling flammable refrigerants should service refrigerators and freezers containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely.

Room occupants should evacuate the space immediately following the accidental release of this refrigerant.

If a service port is added then stand-alone retail food refrigeration units using these refrigerants should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. "Differ" means that either the diameter differs by at least ⅛ inch or the thread direction is reversed (*i.e.*, right-handed vs. left-handed). These different fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit, and should not be accessed with an adaptor.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
3. Retail Food Refrigeration—stand-alone units only (New equipment only) manufactured from 7/15/2024, through September 29, 2024, or equipment manufactured on or after September 30, 2024, except for equipment manufactured on or after September 30, 2024, that remains unchanged, other than cosmetic changes, from an earlier model or design that was already certified to the UL 471 ^{1 2 3} standard before September 30, 2024.	Isobutane (R-600a) Propane (R-290) R-441A.	Acceptable subject to use conditions.	These substitutes may only be used in equipment that meets requirements of either: 1. Supplement SB to UL 471 ^{1 2 3} and listing 2 of this table or 2. ASHRAE 15-2022, ^{1 9 12} UL 60335-2-89, ^{1 2 8} and listing 4 of this table.	

4. Retail Food Refrigeration—stand-alone units only (New equipment only) manufactured on or after September 30, 2024, except for equipment manufactured on or after September 30, 2024, that remains unchanged, other than cosmetic changes, from an earlier model or design that was already certified to the UL 471 ^{1 2 3} standard before September 30, 2024.	Isobutane (R-600a) Propane (R-290) R-441A.	Acceptable subject to use conditions.	This refrigerant may be used only in new equipment specifically designed and clearly identified for the refrigerant (i.e., this substitute may not be used as a conversion or “retrofit” refrigerant for existing equipment designed for other refrigerants). This refrigerant may be used in new stand-alone units if and only if such equipment meets all requirements listed in ASHRAE 15–2022.^{1 9 12} In cases where this listing 4 includes requirements different than those of ASHRAE 15–2022, the appliance would need to meet the requirements of this listing in addition to the requirements in ASHRAE 15–2022. This refrigerant may only be used in stand-alone units that meet all requirements in UL 60335–2–89^{1 2 8} except as provided otherwise in UL 60335–2–89, in ASHRAE 15–2022.^{1 9 12} or in this listing 4. In cases where this listing includes requirements more stringent than those of UL 60335–2–89, the appliance must meet the requirements of this listing 4 in addition to requirements in UL 60335–2–89. Where similar requirements of ASHRAE 15–2022 and UL 60335–2–89 differ, the more stringent or conservative condition shall apply unless superseded by this listing 4. The following markings must be attached at the locations provided and must be permanent:	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(a) On the outside of the equipment: "DANGER—Risk of Fire Or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing" (b) On the outside of the equipment: "WARNING—Risk of Fire Or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (c) On the inside of the equipment near the compressor: "DANGER—Risk of Fire OR Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting to Service This Product. All Safety Precautions Must be Followed" (d) For any equipment pre-charged at the factory, on the equipment packaging or on the outside of the equipment: "WARNING—Risk of Fire Due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations." a. If the equipment is delivered packaged, this label shall be applied on the packaging.	when working on equipment containing flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. Any person commissioning, maintaining, repairing, decommissioning, and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex 101.DVT of UL 60355–2–89, 2nd edition.^{1 2 8} Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from stand-alone units are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

- b. If the equipment is not delivered packaged, this label shall be applied on the outside of the equipment near the control panel or nameplate.
- (e) On the indoor unit near the nameplate:
 - a. At the top of the marking: "Minimum Installation height, X m (W ft)." This marking is only required if required by UL 60335-2-89. The terms "X" and "W" shall be replaced by the numeric height as calculated per UL 60335-2-89. Note that the formatting here is slightly different than UL 60335-2-89; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.
 - b. Immediately below a or at the top of the marking if a is not required: "Minimum room area (operating or storage), Y m² (Z ft²)." The terms "Y" and "Z" shall be replaced by the numeric area as calculated per UL 60335-2-89. Note that the formatting here is slightly different than UL 60335-2-89; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.
- (f) For non-fixed equipment, on the outside of the product: "WARNING—Risk of Fire or Explosion—Store in a well-ventilated room without continuously operating flames or other potential ignition."
- (g) For fixed equipment that is ducted, near the nameplate: "WARNING—Risk Of Fire Or Explosion—Auxiliary devices which may be ignition sources shall not be installed in the ductwork, other than auxiliary devices listed for use with the specific appliance. See instructions."
- (h) All of these markings must be in letters no less than 6.4 mm (¼ inch) high.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			The equipment must have red Pantone® Matching System #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25mm) in both directions from such locations and shall be replaced if removed. In addition to or instead of the markings described in Clause 7.6DV D1 of UL 60335-2-89,^{1 2 8} the equipment may display the GHS warning symbol for hazard category 1 flammable gases (black flame on a white background in a diamond with equal length sides with a red border), as defined in Chapter 2.2, Flammable Gases, and Annex 1, Classification and Labeling Summary Tables, of ST/SG/AC.10/30/Rev.9, Global Harmonized System (GHS) of Classification and Labelling of Chemicals, Ninth revised edition^{1 13 14} on the following three locations: • Outside of the equipment (label (a)); • on the appliance packaging for a factory-charged unit or adjacent to the control panel or nameplate of a unit charged in place (label (d)); and • in a location visible when accessing a service port and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes) (service label). The perpendicular height of the diamond containing the GHS warning symbol for hazard category 1 flammable gases shall be at least 15 mm (⁹/₁₆ in). In addition, next to the GHS warning symbol for hazard category 1 flammable gases must be text of the refrigerant safety class of the refrigerant according to ASHRAE 34-2022,^{1 9 10 11} in letters at least one-third the height of the diamond symbol.	

5. Very low temperature refrigeration. Non-mechanical heat transfer (New equipment only).	Ethane (R-170)	Acceptable subject to use conditions.	This refrigerant may be used only in new equipment specifically designed and clearly identified for the refrigerant (i.e., the substitute may not be used as a conversion or "retrofit" refrigerant for existing equipment designed for other refrigerants). This refrigerant may only be used in equipment that meets requirements in Supplement SB to UL 471.^{1 2 3} In cases where this listing 5 of this table includes requirements more stringent than those of UL 471, the appliance must meet the requirements of listing 5 of this table in place of the requirements in UL 471. The charge size for the equipment must not exceed 150 g (5.29 oz) in each circuit. As provided in clauses SB6.1.2 to SB6.1.5 of UL 471,^{1 2 3} the following markings must be attached at the locations provided and must be permanent:	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(a) On or near any evaporators that can be contacted by the consumer: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. Do Not Use Mechanical Devices To Defrost Refrigerator. Do Not Puncture Refrigerant Tubing." (b) Near the machine compartment: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (c) Near the machine compartment: "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." (d) On the exterior of the refrigerator: "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (e) Near any and all exposed refrigerant tubing: "CAUTION—Risk of Fire or Explosion Due To Puncture Of Refrigerant Tubing; Follow Handling Instructions Carefully. Flammable Refrigerant Used." All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The refrigeration equipment must have red, Pantone® Matching System #185 or RAL 3020 marked pipes, hoses, and other devices through which the refrigerant is serviced, typically known as the service port, to indicate the use of a flammable refrigerant. This color must be present at all service ports and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes). The color mark must extend at least 2.5 centimeters (1 inch) from the compressor and must be replaced if removed.	should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling ethane. Special care should be taken to avoid contact with the skin since ethane, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service equipment containing ethane. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. If a service port is added then refrigeration equipment using this refrigerant should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. "Differ" means that either the diameter differs by at least 1/16 inch or the thread direction is reversed (<i>i.e.</i>, right-handed vs. left-handed). These different fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit, and should not be accessed with an adaptor. An example of non-mechanical heat transfer using this refrigerant would be use in a secondary loop of a thermosiphon.

6. Vending machines (New equipment only).	Isobutane (R-600a), Propane (R-290), R-441A.	Acceptable subject to use conditions.	These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerants (<i>i.e.</i>, none of these substitutes may be used as a conversion or "retrofit" refrigerant for existing equipment designed for other refrigerants). Detaching and replacing the old refrigeration circuit from the outer casing of the equipment with a new one containing a new evaporator, condenser, and refrigerant tubing within the old casing is considered "new" equipment and not a retrofit of the old, existing equipment. These substitutes may only be used in equipment that meets requirements in Supplement SA to UL 541.^{1,2,5} In cases where this listing 6 of this table includes requirements more stringent than those of UL 541, the appliance must meet the requirements of this listing 6 of this table in place of the requirements in UL 541. The charge size for vending machines must not exceed 150 g (5.29 oz) in each circuit. As provided in clauses SA6.1.2 to SA6.1.5 of UL 541,^{1,2,5} the following markings must be attached at the locations provided and must be permanent:	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling these refrigerants. Special care should be taken to avoid contact with the skin since these refrigerants, like many refrigerants, can cause freeze burns on the skin.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(a) On or near any evaporators that can be contacted by the consumer: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. Do Not Use Mechanical Devices To Defrost Refrigerator. Do Not Puncture Refrigerant Tubing." (b) Near the machine compartment: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (c) Near the machine compartment: "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." (d) On the exterior of the refrigerator: "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (e) Near any and all exposed refrigerant tubing: "CAUTION—Risk of Fire or Explosion Due To Puncture Of Refrigerant Tubing; Follow Handling Instructions Carefully. Flammable Refrigerant Used." All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The refrigeration equipment must have red, Pantone® Matching System #185 or RAL 3020 marked pipes, hoses, and other devices through which the refrigerant is serviced, typically known as the service port, to indicate the use of a flammable refrigerant. This color must be present at all service ports and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes). The color mark must extend at least 2.5 centimeters (1 inch) from the compressor and must be replaced if removed.	A Class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on refrigeration equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing these refrigerants. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely.

7. Residential and light-commercial air conditioning and heat pumps—self-contained room air conditioners only (New equipment only).	Propane (R-290), R-441A.	Acceptable subject to use conditions.	These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerants (<i>i.e.</i>, none of these substitutes may be used as a conversion or “retrofit” refrigerant for existing equipment designed for other refrigerants). These refrigerants may only be used in equipment that meets requirements in Supplement SA and Appendices B through F of UL 484.^{1,2,4} In cases where listing 7 of this table includes requirements more stringent than those of UL 484, the appliance must meet the requirements of this listing 7 of this table in place of the requirements in UL 484. The charge size for the entire air conditioner must not exceed the maximum refrigerant mass determined according to Appendix F of UL 484 for the room size where the air conditioner is used. The charge size for these three refrigerants must in no case exceed 1,000 g (35.3 oz or 2.21 pounds) of propane or 1,000 g (35.3 oz or 2.21 pounds) of R-441A. For portable air conditioners, the charge size must in no case exceed 300 g (10.6 oz or 0.66 pounds) of propane or 330 g (11.6 oz or 0.72 pounds) of R-441A. The manufacturer must design a charge size for the entire air conditioner that does not exceed the amount specified for the unit’s cooling capacity, as specified in table A, B, C, D, or E of this appendix R.	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling these refrigerants. Special care should be taken to avoid contact with the skin since these refrigerants, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			As provided in clauses SA6.1.2 to SA6.1.5 of UL 484,^{1 2 4} the following markings must be attached at the locations provided and must be permanent: (a) On the outside of the air conditioner: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (b) On the outside of the air conditioner: "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (c) On the inside of the air conditioner near the compressor: "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." (d) On the outside of each portable air conditioner: "WARNING: Appliance shall be installed, operated and stored in a room with a floor area larger the "X" m² (Y ft²)." The value "X" on the label must be determined using the minimum room size in m² calculated using Appendix F of UL 484. For R-441A, use a lower flammability limit of 0.041 kg/m³ in calculations in Appendix F of UL 484. All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The air conditioning equipment must have red, Pantone® Matching System #185 or RAL 3020 marked pipes, hoses, and other devices through which the refrigerant is serviced, typically known as the service port, to indicate the use of a flammable refrigerant. This color must be present at all service ports and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes). The color mark must extend at least 2.5 centimeters (1 inch) from the compressor and must be replaced if removed.	Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service air conditioning equipment containing these refrigerants. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. If a service port is added then air conditioning equipment using this refrigerant should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. "Differ" means that either the diameter differs by at least ⅓ inch or the thread direction is reversed (i.e., right-handed vs. left-handed). These different fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit, and should not be accessed with an adaptor. Examples of air conditioning equipment in this category include window air conditioning units, portable room air conditioners, and packaged terminal air conditioners and heat pumps.

8. Residential and light-commercial air conditioning and heat pumps—self-contained room air conditioners only (New equipment only) manufactured from May 10, 2015, and up to but not including May 30, 2023.	HFC–32	Acceptable subject to use conditions.	This refrigerant may be used only in new equipment specifically designed and clearly identified for the refrigerant (i.e., this substitute may not be used as a conversion or “retrofit” refrigerant for existing equipment designed for other refrigerants). This refrigerant may only be used in equipment that meets all requirements in Supplement SA and Appendices B through F of UL 484.^{1 2 4} In cases where this listing 8 of this table includes requirements more stringent than those of UL 484, the appliance must meet the requirements of listing 8 of this table in place of the requirements in UL 484. The charge size for the entire air conditioner must not exceed the maximum refrigerant mass determined according to Appendix F of UL 484 for the room size where the air conditioner is used. The manufacturer must design a charge size for the entire air conditioner that does not exceed the amount specified for the unit’s cooling capacity, as specified in table A, B, C, D, or E of this appendix. For equipment following this listing 8, and as provided in clauses SA6.1.2 to SA6.1.5 of UL 484,^{1 2 4} the following markings must be attached at the locations provided and must be permanent:	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling these refrigerants. Special care should be taken to avoid contact with the skin since these refrigerants, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby.

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(a) On the outside of the air conditioner: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (b) On the outside of the air conditioner: "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (c) On the inside of the air conditioner near the compressor: "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." (d) On the outside of each portable air conditioner: "WARNING: Appliance shall be installed, operated and stored in a room with a floor area larger the "X" m² (Y ft²). The value "X" on the label must be determined using the minimum room size in m² calculated using Appendix F of UL 484. All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The air conditioning equipment must have red, Pantone® Matching System (PMS) #185 marked pipes, hoses, and other devices through which the refrigerant is serviced, typically known as the service port, to indicate the use of a flammable refrigerant. This color must be present at all service ports and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes). The color mark must extend at least 2.5 centimeters (1 inch) from the compressor and must be replaced if removed.	Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing these refrigerants. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. If a service port is added then air conditioning equipment using this refrigerant should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. "Differ" means that either the diameter differs by at least ⅜ inch or the thread direction is reversed (<i>i.e.</i>, right-handed vs. left-handed). These different fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit, and should not be accessed with an adaptor. Air conditioning equipment in this category includes: - Window air conditioning units. - Portable room air conditioners. - Packaged terminal air conditioners and heat pumps.

9. Residential and light-commercial air conditioning and heat pumps—self-contained room air conditioners only (New equipment only) manufactured from May 30, 2023 through January 1, 2024.	HFC–32	Acceptable subject to use conditions.	This refrigerant may only be used in equipment that meets all requirements in either: (1) Supplement SA and Appendices B through F of UL 484 ^{1 2 4} and listing 8 of this table, or (2) UL 60335–2–40 ^{1 2 7} and listing 10 of this table.	
10. Residential and light-commercial air conditioning and heat pumps—self-contained room air conditioners only. (New equipment only) manufactured on or after January 2, 2024.	HFC–32	Acceptable subject to use conditions.	This refrigerant may be used only in new equipment specifically designed and clearly identified for the refrigerant (i.e., this substitute may not be used as a conversion or “retrofit” refrigerant for existing equipment designed for other refrigerants). This substitute may only be used in air conditioning equipment that meets all requirements in UL 60335–2–40^{1 2 7} and this listing 10 of this table. In cases where this listing 10 includes requirements more stringent than those of UL 60335–2–40, the appliance must meet the requirements of this listing 10 in place of the requirements in UL 60335–2–40. The following markings must be attached at the locations provided and must be permanent: (a) On the outside of the equipment: “WARNING—Risk of Fire. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing.” (b) On the outside of the equipment: “WARNING—Risk of Fire. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used.” (c) On the inside of the equipment near the compressor: “WARNING—Risk of Fire. Flammable Refrigerant Used. Consult Repair Manual/Owner’s Guide Before Attempting to Service This Product. All Safety Precautions Must be Followed.”	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flam-

SUBSTITUTES THAT ARE ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(d) For any equipment pre-charged at the factory, on the equipment packaging or on the outside of the equipment: "WARNING—Risk of Fire due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations" a. If the equipment is delivered packaged, this label shall be applied on the packaging. b. If the equipment is not delivered packaged, this label shall be applied on the outside of the equipment near the control panel or nameplate. (e) On the equipment near the nameplate: a. At the top of the marking: "Minimum Installation height, X m (W ft)." This marking is only required if required by the UL 60335–2–40. The terms "X" and "W" shall be replaced by the numeric height as calculated per UL 60335–2–40. Note that the formatting here is slightly different than UL 60335–2–40; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. b. Immediately below marking (a) of this listing 8 or at the top of the marking if marking (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²)." The terms "Y" and "Z" shall be replaced by the numeric area as calculated per UL 60335–2–40. Note that the formatting here is slightly different than UL 60335–2–40; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.	flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex HH of UL 60335–2–40.^{2 7} CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration. Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from residential and light commercial air conditioning appliances are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

			(f) For non-fixed equipment, on the outside of the product: "WARNING—Risk of Fire or Explosion—Store in a well-ventilated room without continuously operating flames or other potential ignition." (g) All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The equipment must have red Pantone Matching System (PMS) #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25mm) in both directions from such locations and shall be replaced if removed.	

¹ The Director of the Federal Register approves this incorporation by reference (5 U.S.C. 552(a) and 1 CFR part 51). You may inspect a copy at the U.S. EPA or at the National Archives and Records Administration (NARA). Contact the U.S. EPA at: EPA Docket Center, WJC West Building, Room 3334, 1301 Constitution Avenue NW, Washington, DC 20004, <https://www.epa.gov/dockets>, (202) 566–1742. For information on the availability of this material at NARA, visit <https://www.archives.gov/federal-register/cfr/ibr-locations> or email fr.inspection@nara.gov.

² You may obtain the UL material from: Underwriters Laboratories Inc. (UL) COMM 2000; 151 Eastern Avenue; Bensenville, IL 60106; phone: 1–888–853–3503 in the U.S. or Canada (other countries +1–415–352–2168); email: orders@shopulstandards.com; website: <https://ulstandards.ul.com> or www.shopulstandards.com.

³ UL 471. Commercial Refrigerators and Freezers. 10th edition. Supplement SB: Requirements for Refrigerators and Freezers Employing a Flammable Refrigerant in the Refrigerating System. November 24, 2010.

⁴ UL 484. Room Air Conditioners. 8th edition. Supplement SA: Requirements for Room Air Conditioners Employing a Flammable Refrigerant in the Refrigerating System and Appendices B through F. December 21, 2007, with changes through August 3, 2012.

⁵ UL 541. Refrigerated Vending Machines. 7th edition. Supplement SA: Requirements for Refrigerated Venders Employing a Flammable Refrigerant in the Refrigerating System. December 30, 2011.

⁶ UL 60335–2–24. Standard for Safety: Requirements for Household and Similar Electrical Appliances,—Safety—Part 2–24: Particular Requirements for Refrigerating Appliances, Ice-Cream Appliances and Ice-Makers, 2nd edition, dated April 28, 2017.

⁷ UL 60335–2–40. Standard for Safety: Household And Similar Electrical Appliances—Safety—Part 2–40: Particular Requirements for Electrical Heat Pumps, Air-Conditioners and Dehumidifiers, 3rd edition, dated November 1, 2019.

⁸ UL 60335–2–89. Standard for Safety for Household and Similar Electrical Appliances—Safety—Part 2–89: Particular Requirements for Commercial Refrigerating Appliances and Ice-Makers with an Incorporated or Remote Refrigerant Unit or Motor-Compressor, 2nd edition, dated October 27, 2021.

⁹ You may obtain the ANSI/ASHRAE material from: American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE), 180 Technology Parkway NW, Peachtree Corners, Georgia 30092; phone: 1–800–527–4723 or 1–404–636–8400 in the U.S. or Canada; email: cservice@ashrae.org; website: <https://www.ashrae.org/technical-resources/bookstore/ashrae-refrigeration-resources>.

¹⁰ ANSI/ASHRAE Standard 34–2022. Designation and Safety Classification of Refrigerants, copyright 2022.

¹¹ ANSI/ASHRAE Addendum a to ANSI/ASHRAE Standard 34–2022, Designation and Safety Classification of Refrigerants, ANSI-/ASHRAE-approved December 20, 2022.

¹² ANSI/ASHRAE Standard 15–2022. Safety Standard for Refrigeration Systems, copyright 2022.

¹³ You may obtain the material from the United Nations Publications section at: <https://shop.un.org/books/global-harmon-syst-class-9-92280>; United Nations Publications Customer Service, P.O. Box 960, Herndon, VA 20172; phone: 1–703–661–1571; email: order@un.org.

¹⁴ ST/SG/AC.10/30/Rev.9, Global Harmonized System (GHS) of Classification and Labelling of Chemicals, Ninth revised edition, copyright 2021; Chapter 2.2, Flammable Gasses, and Annex 1, Classification and Labelling Summary Tables.

* * * * *

APPENDIX S TO SUBPART G OF PART 82—
 SUBSTITUTES LISTED IN THE SEP-
 TEMBER 19, 2012 FINAL RULE, EFFEC-
 TIVE DECEMBER 18, 2012.

FIRE SUPPRESSION AND EXPLOSION PROTECTION SECTOR—ACCEPTABLE SUBJECT TO USE
 CONDITIONS

End-Use	Substitute	Decision	Conditions	Further information
Total Flooding	Powdered Aerosol F (KSA®) as a substitute for Halon 1301.	Acceptable subject to use conditions.	For use only in normally unoccupied areas.	Use of this agent should be in accordance with the safety guidelines in the latest edition of the NFPA 2010 standard for Aerosol Extinguishing Systems. For establishments filling, installing, servicing, using, or disposing of containers or systems to be used in total flooding applications, EPA recommends the following: —appropriate protective clothing (e.g., goggles, particulate removing respirators, and gloves) should be worn during the installation and maintenance of the extinguishing units filled with the agent or during clean up and disposal of this agent; —training should be provided to all employees that would be likely to handle containers of the agent or extinguishing units filled with the agent, required to clean up after discharge or required to work near spaces protected by Powdered Aerosol F. Releases in all settings should be limited to an appropriate design concentration for the protected space so that increased blood pH level would not adversely affect exposed individuals. Exposed individuals should be given an electrolyte solution to drink afterwards to restore the pH within the appropriate range. Each extinguisher should be clearly labeled with the potential hazards from use and safe handling procedures. In the case of an accidental spill, the area should be well-ventilated, and workers should wear protective equipment while following good industrial hygiene practices for clean-up and disposal. See additional comments 1, 2, 3, 4.

Environmental Protection Agency

Pt. 82, Subpt. G, App. S

FIRE SUPPRESSION AND EXPLOSION PROTECTION SECTOR—ACCEPTABLE SUBJECT TO USE
CONDITIONS—Continued

End-Use	Substitute	Decision	Conditions	Further information
Total Flooding ...	Powdered Aerosol G (Dry Sprinkler Powdered Aerosol (DSPA) Fixed Generators) as a substitute for Halon 1301.	Acceptable subject to use conditions.	For use only in normally unoccupied areas.	Use of this agent should be in accordance with the safety guidelines in the latest edition of the NFPA 2010 standard for Aerosol Extinguishing Systems. For establishments filling, installing, servicing, using or disposing of generator units or systems in total flooding applications, EPA recommends the appropriate protective clothing (e.g., goggles, particulate removing respirators, and gloves) should be worn during the installation and maintenance of the extinguishing units filled with the agent or during clean up and disposal of this agent. Powdered Aerosol G should be collected by hand (e.g., with a dustpan and duster or a vacuum cleaner); waste should be collected in suitable drums for disposal and the area should be washed clean with sufficient quantities of water; and training should be provided to all employees that would be likely to handle the agent or generator units filled containing the agent, required to clean up after discharge or required to work near spaces protected by Powdered Aerosol G fixed generator total flooding systems. In accordance with Department of Health and Human Services regulations (42 CFR Part 84), safety glasses and a NIOSH/CDC-approved N99 respirator are required for individuals installing Powdered Aerosol G fixed systems. Each generator unit should be clearly labeled with the potential hazards from use and safe handling procedures. In the case of an accidental discharge, the area should be well-ventilated, and workers should wear protective equipment while following good industrial hygiene practices for clean-up and disposal. See additional comments 1, 2, 3, 4.

Additional comments:

1—Should conform to relevant OSHA requirements, including 29 CFR 1910, Subpart L, Sections 1910.160 and 1910.162.

2—Per OSHA requirements, protective gear (SCBA) should be available in the event personnel should reenter the area.

3—The agent should be recovered from the fire protection system in conjunction with testing or servicing, and recycled for later use or destroyed.

4—EPA has no intention of duplicating or displacing OSHA coverage related to the use of personal protective equipment (e.g., respiratory protection), fire protection, hazard communication, worker training or any other occupational safety and health standard with respect to halon substitutes.

[77 FR 58043, Sept. 19, 2012]

APPENDIX T TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE APRIL 29, 2013
FINAL RULE, EFFECTIVE MAY 29, 2013.

FIRE SUPPRESSION AND EXPLOSION PROTECTION SECTOR—ACCEPTABLE SUBJECT TO NARROWED
USE LIMITS

End-use	Substitute	Decision	Conditions	Further Information
Streaming	C7 Fluoro-ketone as a substitute for Halon 1211.	Acceptable subject to narrowed use limits.	For use only in non-residential applications.	Use of this agent should be in accordance with the latest edition of NFPA Standard 10 for Portable Fire Extinguishers. For operations that fill canisters to be used in streaming applications, EPA recommends the following: —Adequate ventilation should be in place; —All spills should be cleaned up immediately in accordance with good industrial hygiene practices; and —Training for safe handling procedures should be provided to all employees that would be likely to handle containers of the agent or extinguishing units filled with the agent. See additional comments 1, 2, 3, 4.

Additional comments:

- 1—Should conform to relevant OSHA requirements, including 29 CFR 1910, Subpart L, Sections 1910.160 and 1910.162.
- 2—Per OSHA requirements, protective gear (SCBA) should be available in the event personnel should reenter the area.
- 3—The agent should be recovered from the fire protection system in conjunction with testing or servicing, and recycled for later use or destroyed.
- 4—EPA has no intention of duplicating or displacing OSHA coverage related to the use of personal protective equipment (e.g., respiratory protection), fire protection, hazard communication, worker training or any other occupational safety and health standard with respect to halon substitutes.

[78 FR 25002, Apr. 29, 2013]

APPENDIX U TO SUBPART G OF PART 82—UNACCEPTABLE SUBSTITUTES AND SUBSTITUTES SUBJECT TO USE RESTRICTIONS LISTED IN THE JULY 20, 2015 FINAL RULE, EFFECTIVE AUGUST 19, 2015

AEROSOLS—UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Further information
Propellants	HFC–125	Unacceptable as of January 1, 2016.	HFC–125 has a Chemical Abstracts Service Registry Number (CAS Reg. No.) of 354–33–6 and it is also known by the name 1,1,1,2,2-pentafluoropropane. HFC–125 has a GWP of 3,500. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date. Products using this propellant that are manufactured prior to January 1, 2016 may be sold, imported, exported, distributed and used after that date.
Propellants	HFC–134a	Unacceptable as of July 20, 2016, except uses listed as acceptable, subject to use conditions.	HFC–134a has a Chemical Abstracts Service Registry Number (CAS Reg. No.) of 811–97–2 and it is also known by the name 1,1,1,2-tetrafluoropropane. HFC–134a has a GWP of 1,430. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date. Products using this propellant that are manufactured prior to July 20, 2016 may be sold, imported, exported, distributed and used after that date.

AEROSOLS—UNACCEPTABLE SUBSTITUTES—Continued

End-use	Substitute	Decision	Further information
Propellants	HFC-227ea and blends of HFC-134a and HFC-227ea.	Unacceptable as of July 20, 2016, except uses listed as acceptable, subject to use conditions.	HFC-227ea has a Chemical Abstracts Service Registry Number (CAS Reg. No.) of 431-89-0 and it is also known by the name 1,1,1,2,3,3,3-heptafluoropropane. HFC-134a has a Chemical Abstracts Service Registry Number (CAS Reg. No.) of 811-97-2 and it is also known by the name 1,1,1,2-tetrafluoropropane. HFC-227ea and HFC-134a have GWPs of 3,220 and 1,430, respectively. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date. Products using these propellants that are manufactured prior to July 20, 2016 may be sold, imported, exported, distributed and used after that date.
Propellants	HCFC-22 and HCFC-142b.	Unacceptable effective September 18, 2015.	Use or introduction into interstate commerce of virgin HCFC-22 and HCFC-142b for aerosols is prohibited as of January 1, 2010 under EPA's regulations at 40 CFR part 82 subpart A. These propellants have ozone depletion potentials of 0.055 and 0.065, respectively.
Solvents	HCFC-141b and blends thereof.	Unacceptable effective September 18, 2015.	Use or introduction into interstate commerce of virgin HCFC-141b for aerosols is prohibited as of January 1, 2015 under EPA's regulations at 40 CFR part 82 subpart A. HCFC-141b has an ozone depletion potential of 0.11.

SUBSTITUTES ACCEPTABLE SUBJECT TO USE CONDITIONS

End-use	Substitute	Decision	Use conditions	Further information
Propellants	HFC-134a	Acceptable subject to use conditions.	The classes of products listed below are acceptable for use from July 20, 2016 through December 31, 2017 and are unacceptable thereafter. • products for functional testing of smoke detectors. • products for which new formulations require governmental review, including: EPA pesticide registration, approval for conformance with military or space agency specifications, or FDA approval (other than MDIs). The classes of products listed below are acceptable for use and other uses are unacceptable as of July 20, 2016: • metered dose inhalers approved by the U.S. Food and Drug Administration for medical purposes. • cleaning products for removal of grease, flux and other soils from electrical equipment or electronics. • refrigerant flushes • products for sensitivity testing of smoke detectors. • lubricants and freeze sprays for electrical equipment or electronics.	HFC-134a has a Chemical Abstracts Service Registry Number (CAS Reg. No.) of 811-97-2 and it is also known by the name 1,1,1,2-tetrafluoropropane. HFC-134a has a GWP of 1,430. Use is allowed for the specified uses because of the technical and safety demands in these applications. Aerosol products using this propellant that are manufactured prior to July 20, 2016, may be sold, imported, exported, distributed and used after that date.

SUBSTITUTES ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
Propellants	HFC–227ea and blends of HFC–227ea and HFC–134a.	Acceptable subject to use conditions.	- sprays for aircraft maintenance. - sprays containing corrosion preventive compounds used in the maintenance of aircraft, electrical equipment or electronics, or military equipment. - pesticides for use near electrical wires or in aircraft, in total release insecticide foggers, or in certified organic use pesticides for which EPA has specifically disallowed all other lower-GWP propellants. - mold release agents and mold cleaners. - lubricants and cleaners for spinnerettes for synthetic fabrics. - duster sprays specifically for removal of dust from photographic negatives, semiconductor chips, specimens under electron microscopes, and energized electrical equipment. - adhesives and sealants in large canisters. - document preservation sprays. - wound care sprays. - topical coolant sprays for pain relief. - products for removing bandage adhesives from skin. Acceptable for use in metered dose inhalers approved by the U.S. Food and Drug Administration for medical purposes and unacceptable for all other uses as of July 20, 2016.	HFC–227ea has a Chemical Abstracts Service Registry Number (CAS Reg. No.) of 431–89–0 and it is also known by the name 1,1,1,2,3,3,3-heptafluoropropane. HFC–227ea has a GWP of 3,220. Aerosol products using this propellant that are manufactured prior to July 20, 2016 may be sold, imported, exported, distributed and used after that date.

REFRIGERATION AND AIR CONDITIONING—UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Further information
Retail food refrigeration (supermarket systems) (new).	HFC–227ea, R–404A, R–407B, R–421B, R–422A, R–422C, R–422D, R–428A, R–434A, R–507A.	Unacceptable as of January 1, 2017.	These refrigerants have GWPs ranging from 2,729 to 3,985. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Retail food refrigeration (supermarket systems) (retrofit).	R–404A, R–407B, R–421B, R–422A, R–422C, R–422D, R–428A, R–434A, R–507A.	Unacceptable as of July 20, 2016.	These refrigerants have GWPs ranging from 2,729 to 3,985. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.

Environmental Protection Agency

Pt. 82, Subpt. G, App. U

REFRIGERATION AND AIR CONDITIONING—UNACCEPTABLE SUBSTITUTES—Continued

End-use	Substitute	Decision	Further information
Retail food refrigeration (remote condensing units) (new).	HFC-227ea, R-404A, R-407B, R-421B, R-422A, R-422C, R-422D, R-428A, R-434A, R-507A.	Unacceptable as of January 1, 2018.	These refrigerants have GWPs ranging from 2,729 to 3,985. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Retail food refrigeration (remote condensing units) (retrofit).	R-404A, R-407B, R-421B, R-422A, R-422C, R-422D, R-428A, R-434A, R-507A.	Unacceptable as of July 20, 2016.	These refrigerants have GWPs ranging from 2,729 to 3,985. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Retail food refrigeration (stand-alone medium-temperature units with a compressor capacity below 2,200 Btu/hr and not containing a flooded evaporator) (new).	FOR12A, FOR12B, HFC-134a, HFC-227ea, KDD6, R-125/290/134a/600a (55.0/1.0/42.5/1.5), R-404A, R-407A, R-407B, R-407C, R-407F, R-410A, R-410B, R-417A, R-421A, R-421B, R-422A, R-422B, R-422C, R-422D, R-424A, R-426A, R-428A, R-434A, R-437A, R-438A, R-507A, RS-24 (2002 formulation), RS-44 (2003 formulation), SP34E, THR-03.	Unacceptable as of January 1, 2019.	These refrigerants have GWPs ranging from approximately 900 to 3,985. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date. "Medium-temperature" refers to equipment that maintains food or beverages at temperatures above 32 °F (0 °C).
Retail food refrigeration (stand-alone medium-temperature units with a compressor capacity below 2,200 Btu/hr and containing a flooded evaporator) (new).	FOR12A, FOR12B, HFC-134a, HFC-227ea, KDD6, R-125/290/134a/600a (55.0/1.0/42.5/1.5), R-404A, R-407A, R-407B, R-407C, R-407F, R-410A, R-410B, R-417A, R-421A, R-421B, R-422A, R-422B, R-422C, R-422D, R-424A, R-426A, R-428A, R-434A, R-437A, R-438A, R-507A, RS-24 (2002 formulation), RS-44 (2003 formulation), SP34E, THR-03.	Unacceptable as of January 1, 2020.	These refrigerants have GWPs ranging from approximately 900 to 3,985. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date. "Medium-temperature" refers to equipment that maintains food or beverages at temperatures above 32 °F (0 °C).
Retail food refrigeration (stand-alone medium-temperature units with a compressor capacity equal to or greater than 2,200 Btu/hr) (new).	FOR12A, FOR12B, HFC-134a, HFC-227ea, KDD6, R-125/290/134a/600a (55.0/1.0/42.5/1.5), R-404A, R-407A, R-407B, R-407C, R-407F, R-410A, R-410B, R-417A, R-421A, R-421B, R-422A, R-422B, R-422C, R-422D, R-424A, R-426A, R-428A, R-434A, R-437A, R-438A, R-507A, RS-24 (2002 formulation), RS-44 (2003 formulation), SP34E, THR-03.	Unacceptable as of January 1, 2020.	These refrigerants have GWPs ranging from approximately 900 to 3,985. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date. "Medium-temperature" refers to equipment that maintains food or beverages at temperatures above 32 °F (0 °C).
Retail food refrigeration (stand-alone low-temperature units) (new).	HFC-227ea, KDD6, R-125/290/134a/600a (55.0/1.0/42.5/1.5), R-404A, R-407A, R-407B, R-407C, R-407F, R-410A, R-410B, R-417A, R-421A, R-421B, R-422A, R-422B, R-422C, R-422D, R-424A, R-428A, R-434A, R-437A, R-438A, R-507A, RS-44 (2003 formulation).	Unacceptable as of January 1, 2020.	These refrigerants have GWPs ranging from approximately 1,800 to 3,985. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date. "Low-temperature" refers to equipment that maintains food or beverages at temperatures at or below 32 °F (0 °C).
Retail food refrigeration (stand-alone units only) (retrofit).	R-404A, R-507A	Unacceptable as of July 20, 2016.	These refrigerants have GWPs of approximately 3,922 and 3,985. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Vending machines (new only).	FOR12A, FOR12B, HFC-134a, KDD6, R-125/290/134a/600a (55.0/1.0/42.5/1.5), R-404A, R-407C, R-410A, R-410B, R-417A, R-421A, R-422B, R-422C, R-422D, R-426A, R-437A, R-438A, R-507A, RS-24 (2002 formulation), SP34E.	Unacceptable as of January 1, 2019.	These refrigerants have GWPs ranging from approximately 1,100 to 3,985. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Vending machines (retrofit only).	R-404A, R-507A.	Unacceptable as of July 20, 2016.	These refrigerants have GWPs of approximately 3,922 and 3,985. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.

FOAM BLOWING AGENTS—SUBSTITUTES ACCEPTABLE SUBJECT TO NARROWED USE LIMITS

End-use	Substitute	Decision	Narrowed use limits	Further information
Rigid Polyurethane: Appliance.	HFC-134a, HFC-245fa, HFC-365mfc and blends thereof; Formacel TI, and Formacel Z-6.	Acceptable Subject to Narrowed Use Limits.	Acceptable from January 1, 2020, until January 1, 2022, in military applications and until January 1, 2025, in space- and aeronautics-related applications where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2022, for military applications or on and before January 1, 2025, in space- and aeronautics-related applications, may be used after those dates.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Process or product in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and projected time for switching.
Rigid Polyurethane: Commercial Refrigeration and Sandwich Panels.	HFC-134a, HFC-245fa, HFC-365mfc, and blends thereof; Formacel TI, and Formacel Z-6.	Acceptable Subject to Narrowed Use Limits.	Acceptable from January 1, 2020, until January 1, 2022, in military applications and until January 1, 2025, in space- and aeronautics-related applications where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2022, for military applications or on and before January 1, 2025, in space- and aeronautics-related applications, may be used after those dates.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Process or product in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and projected time for switching.

Flexible Polyurethane	HFC-134a, HFC-245fa, HFC-365mfc, and blends thereof.	Acceptable Subject to Narrowed Use Limits.	Acceptable from January 1, 2017, until January 1, 2022, in military applications and until January 1, 2025, in space- and aeronautics-related applications where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Process or product in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and projected time for switching.
Rigid Polyurethane: Slabstock and Other.	HFC-134a, HFC-245fa, HFC-365mfc and blends thereof; Formacel TI, and Formacel Z-6.	Acceptable Subject to Narrowed Use Limits.	Acceptable from January 1, 2019, until January 1, 2022, in military applications and until January 1, 2025, in space- and aeronautics-related applications where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2022, for military applications or on and before January 1, 2025, in space- and aeronautics-related applications, may be used after those dates.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Process or product in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and projected time for switching.

FOAM BLOWING AGENTS—SUBSTITUTES ACCEPTABLE SUBJECT TO NARROWED USE LIMITS—Continued

End-use	Substitute	Decision	Narrowed use limits	Further information
Rigid Polyurethane and Polyisocyanurate Laminated Boardstock.	HFC-134a, HFC-245fa, HFC-365mfc and blends thereof.	Acceptable Subject to Narrowed Use Limits.	Acceptable from January 1, 2017, until January 1, 2022, in military applications and until January 1, 2025, in space- and aeronautics-related applications where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2022, for military applications or on and before January 1, 2025, in space- and aeronautics-related applications, may be used after those dates.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Process or product in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and projected time for switching.
Rigid Polyurethane: Marine Flotation Foam.	HFC-134a, HFC-245fa, HFC-365mfc and blends thereof; Formacel TI, and Formacel Z-6.	Acceptable Subject to Narrowed Use Limits.	Acceptable from January 1, 2020, until January 1, 2022, in military applications and until January 1, 2025, in space- and aeronautics-related applications where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2022, for military applications or on and before January 1, 2025, in space- and aeronautics-related applications, may be used after those dates.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Process or product in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and projected time for switching.

Polystyrene: Extruded Sheet.	HFC-134a, HFC-245fa, HFC-365mfc, and blends thereof; Formacel TI, and Formacel Z-6.	Acceptable Subject to Narrowed Use Limits.	Acceptable from January 1, 2017, until January 1, 2022, in military applications and until January 1, 2025, in space- and aeronautics-related applications where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2022, for military applications or on and before January 1, 2025, in space- and aeronautics-related applications, may be used after those dates.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Process or product in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and projected time for switching.
Polystyrene: Extruded Boardstock and Billet.	HFC-134a, HFC-245fa, HFC-365mfc, and blends thereof; Formacel TI, Formacel B, and Formacel Z-6.	Acceptable Subject to Narrowed Use Limits.	Acceptable from January 1, 2021, until January 1, 2022, in military applications and until January 1, 2025, in space- and aeronautics-related applications where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2022, for military applications or on and before January 1, 2025, in space- and aeronautics-related applications, may be used after those dates.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Process or product in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and projected time for switching.

FOAM BLOWING AGENTS—SUBSTITUTES ACCEPTABLE SUBJECT TO NARROWED USE LIMITS—Continued

End-use	Substitute	Decision	Narrowed use limits	Further information
Integral Skin Polyurethane.	HFC-134a, HFC-245fa, HFC-365mfc, and blends thereof; Formacel TI, and Formacel Z-6.	Acceptable Subject to Narrowed Use Limits.	Acceptable from January 1, 2017, until January 1, 2022, in military applications and until January 1, 2025, in space- and aeronautics-related applications where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Process or product in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and projected time for switching.
Polyolefin	HFC-134a, HFC-245fa, HFC-365mfc, and blends thereof; Formacel TI, and Formacel Z-6.	Acceptable Subject to Narrowed Use Limits.	Acceptable from January 1, 2020, until January 1, 2022, in military applications and until January 1, 2025, in space- and aeronautics-related applications where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2022, for military applications or on and before January 1, 2025, in space- and aeronautics-related applications, may be used after those dates.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Process or product in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and projected time for switching.

Phenolic Insulation Board and Bunstock.	HFC-143a, HFC-134a, HFC-245fa, HFC-365mfc, and blends thereof.	Acceptable Subject to Narrowed Use Limits.	Acceptable from January 1, 2017, until January 1, 2022, in military applications and until January 1, 2025, in space- and aeronautics-related applications where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2022, for military applications or on and before January 1, 2025, in space- and aeronautics-related applications, may be used after those dates.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Process or product in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and projected time for switching.

UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Further information
All Foam Blowing End-uses.	HCFC-141b and blends thereof.	Unacceptable effective September 18, 2015. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before December 1, 2017 may be used after that date.	HCFC-141b has an ozone depletion potential of 0.11 under the Montreal Protocol. EPA previously found HCFC-141b unacceptable in all foam blowing end-uses (appendix M to subpart G of 40 CFR part 82). HCFC-141b has an ozone depletion potential (ODP) of 0.11.
All Foam Blowing end-uses.	HCFC-22, HCFC-142b, and blends thereof.	Unacceptable effective September 18, 2015. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before December 1, 2017 may be used after that date.	Use or introduction into interstate commerce of virgin HCFC-22 and HCFC-142b for foam blowing is prohibited after January 1, 2010 under EPA's regulations at 40 CFR part 82 subpart A unless used, recovered, and recycled. These compounds have ODPs of 0.055 and 0.065, respectively.
Flexible Polyurethane.	HFC-134a, HFC-245fa, HFC-365mfc, and blends thereof.	Unacceptable as of January 1, 2017, except where allowed under a narrowed use limit.	These foam blowing agents have global warming potentials (GWPs) ranging from 725 to 1,430. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Polystyrene: Extruded Sheet.	HFC-134a, HFC-245fa, HFC-365mfc, and blends thereof; Formacel TI, and Formacel Z-6.	Unacceptable as of January 1, 2017, except where allowed under a narrowed use limit. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before December 1, 2017 may be used after that date.	These foam blowing agents have GWPs ranging from higher than 370 to approximately 1,500. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Phenolic Insulation Board and Bunstock.	HFC-143a, HFC-134a, HFC-245fa, HFC-365mfc, and blends thereof.	Unacceptable as of January 1, 2017, except where allowed under a narrowed use limit. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before December 1, 2017 may be used after that date.	These foam blowing agents have GWPs ranging from 725 to 4,470. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.

UNACCEPTABLE SUBSTITUTES—Continued

End-use	Substitute	Decision	Further information
Integral Skin Polyurethane.	HFC-134a, HFC-245fa, HFC-365mfc, and blends thereof; Formacel TI, and Formacel Z-6.	Unacceptable as of January 1, 2017, except where allowed under a narrowed use limit.	These foam blowing agents have GWPs ranging from higher than 370 to approximately 1,500. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Rigid Polyurethane: Slabstock and Other.	HFC-134a, HFC-245fa, HFC-365mfc and blends thereof; Formacel TI, and Formacel Z-6.	Unacceptable as of January 1, 2019, except where allowed under a narrowed use limit. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2019, may be used after that date.	These foam blowing agents have GWPs ranging from higher than 370 to approximately 1,500. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Rigid Polyurethane and Polyisocyanurate Laminated Boardstock.	HFC-134a, HFC-245fa, HFC-365mfc and blends thereof.	Unacceptable as of January 1, 2017, except where allowed under a narrowed use limit. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before December 1, 2017 may be used after that date.	These foam blowing agents have GWPs ranging from 725 to 1,430. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Rigid Polyurethane: Marine Flotation Foam.	HFC-134a, HFC-245fa, HFC-365mfc and blends thereof; Formacel TI, and Formacel Z-6.	Unacceptable as of January 1, 2020 except where allowed under a narrowed use limit. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2020, may be used after that date.	These foam blowing agents have GWPs ranging from higher than 370 to approximately 1,500. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Rigid Polyurethane: Commercial Refrigeration and Sandwich Panels.	HFC-134a, HFC-245fa, HFC-365mfc, and blends thereof; Formacel TI, and Formacel Z-6.	Unacceptable as of January 1, 2020 except where allowed under a narrowed use limit. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2020, may be used after that date.	These foam blowing agents have GWPs ranging from higher than 370 to approximately 1,500. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.

UNACCEPTABLE SUBSTITUTES—Continued

End-use	Substitute	Decision	Further information
Rigid Polyurethane: Appliance.	HFC-134a, HFC-245fa, HFC-365mfc and blends thereof; Formacel TI, and Formacel Z-6.	Unacceptable as of January 1, 2020, except where allowed under a narrowed use limit. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2020, may be used after that date.	These foam blowing agents have GWPs ranging from higher than 370 to approximately 1,500. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Polystyrene: Extruded Boardstock and Billet.	HFC-134a, HFC-245fa, HFC-365mfc, and blends thereof; Formacel TI, Formacel B, and Formacel Z-6.	Unacceptable as of January 1, 2021, except where allowed under a narrowed use limit. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2021, may be used after that date.	These foam blowing agents have GWPs ranging from higher than 140 to approximately 1,500. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Polyolefin	HFC-134a, HFC-245fa, HFC-365mfc, and blends thereof; Formacel TI, and Formacel Z-6.	Unacceptable as of January 1, 2020, except where allowed under a narrowed use limit. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2020, may be used after that date.	These foam blowing agents have GWPs ranging from higher than 370 to approximately 1,500. Other substitutes will be available for this end-use with lower overall risk to human health and the environment by the status change date.

FIRE SUPPRESSION AND EXPLOSION PROTECTION AGENTS—UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Further information
Total Flooding	HCFC-22	Unacceptable effective September 18, 2015.	Use or introduction into interstate commerce of virgin HCFC-22 for total flooding fire suppression and explosion protection is prohibited as of January 1, 2010 under EPA's regulations at 40 CFR part 82 subpart A. This chemical has an ozone depletion potential of 0.055.

STERILANTS—UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Further information
Sterilants	Blends containing HCFC-22.	Unacceptable effective September 18, 2015.	Use or introduction into interstate commerce of virgin HCFC-22 for sterilants is prohibited as of January 1, 2010 under EPA's regulations at 40 CFR part 82 subpart A. This chemical has an ozone depletion potential of 0.055.

ADHESIVES, COATINGS AND INKS—UNACCEPTABLE SUBSTITUTES

End-use	Substitute	Decision	Further information
Adhesives, coatings and inks.	HCFC–141b and blends thereof.	Unacceptable effective September 18, 2015.	Use or introduction into interstate commerce of virgin HCFC–141b for adhesives, coatings and inks is prohibited as of January 1, 2015 under EPA's regulations at 40 CFR part 82 subpart A. This chemical has an ozone depletion potential of 0.11.

[80 FR 42953, July 20, 2015, as amended at 81 FR 86885, Dec. 1, 2016]

APPENDIX V TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES LISTED IN THE DECEMBER 1, 2016 FINAL RULE

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS

End-use	Substitute	Decision	Use conditions	Further information
Commercial ice machines (self-contained) (new only).	Propane (R-290).	Acceptable, subject to use conditions.	As of January 3, 2017: This refrigerant may be used only in new equipment designed specifically and clearly identified for the refrigerant—<i>i.e.</i>, this refrigerant may not be used as a conversion or “retrofit” refrigerant for existing equipment. This refrigerant may be used only in self-contained commercial ice machines that meet all requirements listed in Supplement SA to UL 563.^{1,2,5} In cases where this rule includes requirements more stringent than those in UL 563, the equipment must meet the requirements of the final rule in place of the requirements in the UL Standard. The charge size must not exceed 150g (5.29 oz) in each refrigerant circuit of a commercial ice machine. As provided in clauses SA6.1.1 and SA6.1.2 of UL 563, the following markings must be attached at the locations provided and must be permanent: (a) “DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. Do Not Use Mechanical Devices To Defrost Refrigerator. Do Not Puncture Refrigerant Tubing.” This marking must be provided on or near any evaporators that can be contacted by the consumer. (b) “DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing.” This marking must be located near the machine compartment. (c) “CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed.” This marking must be located near the machine compartment. (d) “CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used.” This marking must be provided on the exterior of the refrigeration equipment. (e) “CAUTION—Risk of Fire or Explosion Due To Puncture Of Refrigerant Tubing; Follow Handling Instructions Carefully. Flammable Refrigerant Used.” This marking must be provided near all exposed refrigerant tubing.	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling propane. Special care should be taken to avoid contact with the skin since propane, like many refrigerants, can cause freeze burns on the skin.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The equipment must have red Pantone Matching System. (PMS) #185 marked pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch in both directions from such locations.	A Class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on equipment with propane. Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service equipment containing propane. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. If a service port is added then, commercial ice machines or equipment using propane should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. “Differ” means that either the diameter differs by at least ⅛ inch or the thread direction is reversed (<i>i.e.</i>, right-handed vs. left-handed). These different fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit, and should not be accessed with an adaptor.
Very low temperature refrigeration equipment (new only).	Propane (R-290).	Acceptable, subject to use conditions.	As of January 3, 2017: This refrigerant may be used only in new equipment designed specifically and clearly identified for the refrigerant—<i>i.e.</i>, this refrigerant may not be used as a conversion or “retrofit” refrigerant for existing equipment. This refrigerant may be used only in self-contained commercial ice machines that meet all requirements listed in Supplement SA to UL 563.^{1 2 5} In cases where this rule includes requirements more stringent than those in UL 563, the equipment must meet the requirements of the final rule in place of the requirements in the UL Standard.	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances).

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			The charge size for the equipment must not exceed 150 grams (5.29 ounces) in each refrigerant circuit of the very low temperature refrigeration equipment. As provided in clauses SA6.1.1 and SA6.1.2 of UL 563, the following markings must be attached at the locations provided and must be permanent. (a) "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. Do Not Use Mechanical Devices To Defrost Refrigerator. Do Not Puncture Refrigerant Tubing." This marking must be provided on or near any evaporators that can be contacted by the consumer. (b) "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." This marking must be located near the machine compartment. (c) "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." This marking must be located near the machine compartment. (d) "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." This marking must be provided on the exterior of the refrigeration equipment. (e) "CAUTION—Risk of Fire or Explosion Due To Puncture Of Refrigerant Tubing; Follow Handling Instructions Carefully. Flammable Refrigerant Used." This marking must be provided near all exposed refrigerant tubing. All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The equipment must have red Pantone Matching System (PMS) #185 marked pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch in both directions from such locations.	Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling propane. Special care should be taken to avoid contact with the skin since propane, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on equipment with propane. Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service equipment containing propane. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
Water coolers (new only).	Propane (R-290).	Acceptable, subject to use conditions.	As of January 3, 2017: This refrigerant may be used only in new equipment designed specifically and clearly identified for the refrigerant—<i>i.e.</i>, this refrigerant may not be used as a conversion or “retrofit” refrigerant for existing equipment. This refrigerant may be used only in water coolers that meet all requirements listed in Supplement SB to UL 399^{1 2 3} In cases where the rule includes requirements more stringent than those of the UL 399, the appliance must meet the requirements of the final rule in place of the requirements in the UL Standard. The charge size must not exceed 60 grams (2.12 ounces) per refrigerant circuit in the water cooler. The equipment must have red PMS #185 marked pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch in both directions from such locations. As provided in clauses SB6.1.2 to SB6.1.5 of UL 399, the following markings must be attached at the locations provided and must be permanent: (a) “DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. Do Not Use Mechanical Devices To Defrost Refrigerator. Do Not Puncture Refrigerant Tubing.” This.	If a service port is added then, commercial ice machines or equipment using propane should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. “Differ” means that either the diameter differs by at least $\frac{1}{16}$ inch or the thread direction is reversed (<i>i.e.</i>, right-handed vs. left-handed). These different fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit, and should not be accessed with an adaptor. Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			marking must be provided on or near any evaporators that can be contacted by the consumer. (b) "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." This marking must be located near the machine compartment. (c) "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." This marking must be located near the machine compartment. (d) "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." This marking must be provided on the exterior of the refrigeration equipment. (e) "CAUTION—Risk of Fire or Explosion Due To Puncture Of Refrigerant Tubing; Follow Handling Instructions Carefully. Flammable Refrigerant Used." This marking must be provided near all exposed refrigerant tubing.	Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling propane. Special care should be taken to avoid contact with the skin since propane, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service equipment containing propane. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. If a service port is added, then water coolers or equipment using propane should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. "Differ" means that either the diameter differs by at least $\frac{1}{16}$ inch or the thread direction is reversed (i.e., right-handed vs. left-handed). These different

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
				fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit, and should not be accessed with an adaptor.

¹ The Director of the Federal Register approves this incorporation by reference (5 U.S.C. 552(a) and 1 CFR part 51). You may inspect a copy at U.S. EPA's Air and Radiation Docket, EPA West Building, Room 3334, 1301 Constitution Ave. NW., Washington, DC or at the National Archives and Records Administration (NARA). For questions regarding access to these standards, the telephone number of EPA's Air and Radiation Docket is 202-566-1742. For information on the availability of this material at NARA, call 202-741-6030, or go to: http://www.archives.gov/federal_register/code_of_federal_regulations/ibr_locations.html.

² You may obtain the material from: Underwriters Laboratories Inc. (UL) COMM 2000; 151 Eastern Avenue, Bensenville, IL 60106; orders@comm-2000.com; 1-888-853-3503 in the U.S. or Canada (other countries dial +1-415-352-2168); <http://ulstandards.ul.com/> or www.comm-2000.com.

³ UL 399, Standard for Safety: Drinking Water Coolers.—Supplement SB: Requirements for Drinking Water Coolers Employing a Flammable Refrigerant in the Refrigerating System, 7th edition, Dated August 22, 2008, including revisions through October 17, 2013.

⁴ UL 471, Standard for Safety: Commercial Refrigerators and Freezers.—Supplement SB: Requirements for Refrigerators and Freezers Employing a Flammable Refrigerant in the Refrigerating System, 10th edition, Dated November 24, 2010.

⁵ UL 563, Standard for Safety: Ice Makers.—Supplement SA: Requirements for Ice Makers Employing a Flammable Refrigerant in the Refrigerating System, 8th edition, Dated July 31, 2009, including revisions through November 29, 2013.

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO NARROWED USE LIMITS

End-use	Substitutes	Decision	Narrowed use limits	Further information
Centrifugal chillers (new only).	HFC-134a	Acceptable subject to narrowed use limits.	Acceptable after January 1, 2024, only in military marine vessels where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Application in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and qualified and projected time for switching.
Centrifugal chillers (new only).	HFC-134a and R-404A.	Acceptable subject to narrowed use limits.	Acceptable after January 1, 2024, only in human-rated spacecraft and related support equipment where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Application in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and qualified and projected time for switching.

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO NARROWED USE LIMITS—Continued

End-use	Substitutes	Decision	Narrowed use limits	Further information
Positive displacement chillers (new only).	HFC-134a	Acceptable subject to narrowed use limits.	Acceptable after January 1, 2024, only in military marine vessels where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Application in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and qualified and projected time for switching.
Positive displacement chillers (new only).	HFC-134a and R-404A.	Acceptable subject to narrowed use limits.	Acceptable after January 1, 2024, only in human-rated spacecraft and related support equipment where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Application in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and qualified and projected time for switching.

REFRIGERANTS—UNACCEPTABLE SUBSTITUTES

End-use	Substitutes	Decision	Further information
Centrifugal chillers (new only).	FOR12A, FOR12B, HFC-134a, HFC-227ea, HFC-236fa, HFC-245fa, R-125/134a/600a (28.1/70/1.9), R-125/290/134a/600a (55.0/1.0/42.5/1.5), R-404A, R-407C, R-410A, R-410B, R-417A, R-421A, R-422B, R-422C, R-422D, R-423A, R-424A, R-434A, R-438A, R-507A, RS-44 (2003 composition), and THR-03.	Unacceptable as of January 1, 2024 except where allowed under a narrowed use limit.	These refrigerants have GWPs ranging from approximately 900 to 9,810. Other alternatives will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Centrifugal chillers (new only).	Propylene (R-1270) and R-443A.	Unacceptable as of January 3, 2017.	These refrigerants are highly photochemically reactive in the lower atmosphere and may deteriorate local air quality (that is, may increase ground level ozone). Other alternatives are available for this end-use with lower overall risk to human health and the environment.
Cold storage warehouses (new only).	HFC-227ea, R-125/290/134a/600a (55.0/1.0/42.5/1.5), R-404A, R-407A, R-407B, R-410A, R-410B, R-417A, R-421A, R-421B, R-422A, R-422B, R-422C, R-422D, R-423A, R-424A, R-428A, R-434A, R-438A, R-507A, and RS-44 (2003 composition).	Unacceptable as of January 1, 2023.	These refrigerants have GWPs ranging from approximately 2,090 to 3,990. Other alternatives will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Cold storage warehouses (new only).	Propylene (R-1270) and R-443A.	Unacceptable as of January 3, 2017.	These refrigerants are highly photochemically reactive in the lower atmosphere and may deteriorate local air quality (that is, may increase ground level ozone). Other alternatives are available for this end-use with lower overall risk to human health and the environment.

REFRIGERANTS—UNACCEPTABLE SUBSTITUTES—Continued

End-use	Substitutes	Decision	Further information
Household refrigerators and freezers (new only).	FOR12A, FOR12B, HFC-134a, KDD6, R-125/290/134a/600a (55.0/1.0/42.5/1.5), R-404A, R-407C, R-407F, R-410A, R-410B, R-417A, R-421A, R-421B, R-422A, R-422B, R-422C, R-422D, R-424A, R-426A, R-428A, R-434A, R-437A, R-438A, R-507A, RS-24 (2002 formulation), RS-44 (2003 formulation), SP34E, and THR-03.	Unacceptable as of January 1, 2021.	These refrigerants have GWPs ranging from approximately 900 to 3,985. Other alternatives will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Positive displacement chillers (new only).	FOR12A, FOR12B, HFC-134a, HFC-227ea, KDD6, R-125/134a/600a (28.1/70/1.9), R-125/290/134a/600a (55.0/1.0/42.5/1.5), R-404A, R-407C, R-410A, R-410B, R-417A, R-421A, R-422B, R-422C, R-422D, R-424A, R-434A, R-437A, R-438A, R-507A, RS-44 (2003 composition), SP34E, and THR-03.	Unacceptable as of January 1, 2024 except where allowed under a narrowed use limit.	These refrigerants have GWPs ranging from approximately 900 to 3,985. Other alternatives will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Positive displacement chillers (new only).	Propylene (R-1270) and R-443A.	Unacceptable as of January 3, 2017.	These refrigerants are highly photochemically reactive in the lower atmosphere and may deteriorate local air quality (that is, may increase ground level ozone). Other alternatives are available for this end-use with lower overall risk to human health and the environment.
Residential and light commercial air conditioning and heat pumps (new only).	Propylene (R-1270) and R-443A.	Unacceptable as of January 3, 2017.	These refrigerants are highly photochemically reactive in the lower atmosphere and may deteriorate local air quality (that is, may increase ground level ozone). Other alternatives are available for this end-use with lower overall risk to human health and the environment.

REFRIGERANTS—UNACCEPTABLE SUBSTITUTES—Continued

End-use	Substitutes	Decision	Further information
Residential and light commercial air conditioning—unitary split AC systems and heat pumps (retrofit only).	All refrigerants identified as flammability Class 3 in ANSI/ASHRAE Standard 34–2013 ^{1 2 3} . All refrigerants meeting the criteria for flammability Class 3 in ANSI/ASHRAE Standard 34–2013. This includes, but is not limited to, refrigerant products sold under the names R-22a, 22a, Blue Sky 22a refrigerant, Coolant Express 22a, DURACOOOL-22a, EC-22, Ecofreeez EF-22a, EnviroSAFE 22a, ES-22a, Frost 22a, HC-22a, Maxi-Fridge, MX-22a, Oz-Chill 22a, Priority Cool, and RED TEK 22a.	Unacceptable as of January 3, 2017.	These refrigerants are highly flammable and present a flammability risk when used in equipment designed for nonflammable refrigerants. Other alternatives are available for this end-use with lower overall risk to human health and the environment.
Retail food refrigeration (refrigerated food processing and dispensing equipment) (new only).	HFC-227ea, KDD6, R-125/290/134a/600a (55.0/1.0/42.5/1.5), R-404A, R-407A, R-407B, R-407C, R-407F, R-410A, R-410B, R-417A, R-421A, R-421B, R-422A, R-422B, R-422C, R-422D, R-424A, R-428A, R-434A, R-437A, R-438A, R-507A, RS-44 (2003 formulation).	Unacceptable as of January 1, 2021.	These refrigerants have GWPs ranging from approximately 1,770 to 3,990. Other alternatives will be available for this end-use with lower overall risk to human health and the environment by the status change date.

¹ The Director of the Federal Register approves this incorporation by reference (5 U.S.C. 552(a) and 1 CFR part 51). You may inspect a copy at U.S. EPA's Air and Radiation Docket; EPA West Building, Room 3334, 1301 Constitution Ave. NW., Washington, DC or at the National Archives and Records Administration (NARA). For questions regarding access to this standard, the telephone number of EPA's Air and Radiation Docket is 202–566–1742. For information on the availability of this material at NARA, call 202–741–6030, or go to: http://www.archives.gov/federal_register/code_of_federal_regulations/ibr_locations.html.

² You may obtain this material from: American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE) 6300 Interfirst Drive, Ann Arbor, MI 48108; 1–800–527–4723 in the U.S. or Canada; http://www.techstreet.com/ashrae/ashrae_standards.html?ashrae_auth_token=.

³ ANSI/ASHRAE Standard 34–2013, Designation and Safety Classification of Refrigerants, 2013.

FOAM BLOWING AGENTS—SUBSTITUTES ACCEPTABLE SUBJECT TO NARROWED USE LIMITS

End-use	Substitutes	Decision	Narrowed use limits	Further information
Rigid PU: Spray foam—high-pressure two-component.	HFC-134a, HFC-245fa, and blends thereof; blends of HFC-365mfc with at least four percent HFC-245fa, and commercial blends of HFC-365mfc with seven to 13 percent HFC-227ea and the remainder HFC-365mfc; and Formacel TI.	Acceptable subject to narrowed use limits.	Acceptable from January 1, 2020, until January 1, 2025, only in military or space- and aeronautics-related applications where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2025, may be used after that date.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Process or product in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and projected time for switching.
Rigid PU: Spray foam—low-pressure two-component.	HFC-134a, HFC-245fa, and blends thereof; blends of HFC-365mfc with at least four percent HFC-245fa, and commercial blends of HFC-365mfc with seven to 13 percent HFC-227ea and the remainder HFC-365mfc; and Formacel TI.	Acceptable subject to narrowed use limits.	Acceptable from January 1, 2021, until January 1, 2025, only in military or space- and aeronautics-related applications where reasonable efforts have been made to ascertain that other alternatives are not technically feasible due to performance or safety requirements. Low pressure two-component spray foam kits manufactured with these substitutes on or before January 1, 2025, for military or space- and aeronautics-related applications may be used after that date.	Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information should include descriptions of: • Process or product in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, e.g., performance, technical or safety standards; and/or • Anticipated date other substitutes will be available and projected time for switching.

FOAM BLOWING AGENTS—UNACCEPTABLE SUBSTITUTES

End-use	Substitutes	Decision	Further information
Flexible PU	Methylene chloride	Unacceptable as of January 3, 2017.	Methylene chloride is a carcinogen and may present a toxicity risk. Other alternatives are available for this end-use with lower overall risk to human health and the environment.
Rigid PU: Spray foam—one component foam sealants.	HFC-134a, HFC-245fa, and blends thereof; blends of HFC-365mfc with at least four percent HFC-245fa, and commercial blends of HFC-365mfc with seven to 13 percent HFC-227ea and the remainder HFC-365mfc; and Formacel TI.	Unacceptable as of January 1, 2020. One-component foam sealant cans manufactured with these substitutes on or before January 1, 2020, may be used after that date.	These foam blowing agents have GWPs ranging from higher than 730 to approximately 1,500. Other alternatives will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Rigid PU: Spray foam—high-pressure two-component.	HFC-134a, HFC-245fa, and blends thereof; blends of HFC-365mfc with at least four percent HFC-245fa, and commercial blends of HFC-365mfc with seven to 13 percent HFC-227ea and the remainder HFC-365mfc; and Formacel TI.	Unacceptable as of January 1, 2020, except where allowed under a narrowed use limit. Closed cell foam products and products containing closed cell foams manufactured with these substitutes on or before January 1, 2020, may be used after that date.	These foam blowing agents have GWPs ranging from higher than 730 to approximately 1,500. Other alternatives will be available for this end-use with lower overall risk to human health and the environment by the status change date.
Rigid PU: Spray foam—low-pressure two-component.	HFC-134a, HFC-245fa, and blends thereof; blends of HFC-365mfc with at least four percent HFC-245fa, and commercial blends of HFC-365mfc with seven to 13 percent HFC-227ea and the remainder HFC-365mfc; and Formacel TI.	Unacceptable as of January 1, 2021, except where allowed under a narrowed use limit. Low pressure two-component spray foam kits manufactured with these substitutes on or before January 1, 2025, may be used after that date.	These foam blowing agents have GWPs ranging from higher than 730 to approximately 1,500. Other alternatives will be available for this end-use with lower overall risk to human health and the environment by the status change date.

FIRE SUPPRESSION AND EXPLOSION PROTECTION AGENTS—ACCEPTABLE SUBJECT TO USE
CONDITIONS

End-use	Sub- stitute	Decision	Use conditions	Further information
Stream- ing.	2-BTP	Acceptable, subject to use condi- tions.	As of January 3, 2017, accept- able only for use in handheld ex- tinguishers in aircraft.	This fire suppressant has a relatively low GWP of 0.23–0.26 and a short atmospheric lifetime of approximately seven days. This agent is subject to requirements contained in a Toxic Substance Control Act (TSCA) section 5(e) Consent Order and any subsequent TSCA section 5(a)(2) Significant New Use Rule (SNUR). For establishments manufacturing, installing and maintaining handheld extinguishers using this agent: (1) Use of this agent should be used in accordance with the latest edition of NFPA Standard 10 for Portable Fire Extinguishers; (2) In the case that 2-BTP is inhaled, person(s) should be immediately removed and exposed to fresh air; if breathing is difficult, person(s) should seek medical attention; (3) Eye wash and quick drench facilities should be available. In case of ocular exposure, person(s) should immediately flush the eyes, including under the eyelids, with fresh water and move to a non-contaminated area; (4) Exposed person(s) should remove all contaminated clothing and footwear to avoid irritation, and medical attention should be sought if irritation develops or persists; (5) Although unlikely, in case of ingestion of 2-BTP, the person(s) should consult a physician immediately; (6) Manufacturing space should be equipped with specialized engineering controls and well ventilated with a local exhaust system and low-lying source ventilation to effectively mitigate potential occupational exposure; regular testing and monitoring of the workplace atmosphere should be conducted; (7) Employees responsible for chemical processing should wear the appropriate PPE, such as protective gloves, tightly sealed goggles, protective work clothing, and suitable respiratory protection in case of accidental release or insufficient ventilation; (8) All spills should be cleaned up immediately in accordance with good industrial hygiene practices; and (9) Training for safe handling procedures should be provided to all employees that would be likely to handle containers of the agent or extinguishing units filled with the agent.

FIRE SUPPRESSION AND EXPLOSION PROTECTION AGENTS—ACCEPTABLE SUBJECT TO USE
CONDITIONS—Continued

End-use	Sub- stitute	Decision	Use conditions	Further information
Total flood- ing.	2-BTP	Acceptable, subject to use condi- tions.	As of January 3, 2017, acceptable only for use in engine nacelles and auxiliary power units on aircraft.	This fire suppressant has a relatively low GWP of 0.23–0.26 and a short atmospheric lifetime of approximately seven days. This agent is subject to requirements contained in a TSCA section 5(e) Consent Order and any subsequent TSCA section 5(a)(2) SNUR. For establishments manufacturing, installing, and servicing engine nacelles and auxiliary power units on aircraft using this agent: (1) This agent should be used in accordance with the safety guidelines in the latest edition of the National Fire Protection Association (NFPA) 2001 Standard for Clean Agent Fire Extinguishing Systems; (2) In the case that 2-BTP is inhaled, person(s) should be immediately removed and exposed to fresh air; if breathing is difficult, person(s) should seek medical attention; (3) Eye wash and quick drench facilities should be available. In case of ocular exposure, person(s) should immediately flush the eyes, including under the eyelids, with fresh water and move to a non-contaminated area. (4) Exposed person(s) should remove all contaminated clothing and footwear to avoid irritation, and medical attention should be sought if irritation develops or persists; (5) Although unlikely, in case of ingestion of 2-BTP, the person(s) should consult a physician immediately; (6) Manufacturing space should be equipped with specialized engineering controls and well ventilated with a local exhaust system and low-lying source ventilation to effectively mitigate potential occupational exposure; regular testing and monitoring of the workplace atmosphere should be conducted; (7) Employees responsible for chemical processing should wear the appropriate PPE, such as protective gloves, tightly sealed goggles, protective work clothing, and suitable respiratory protection in case of accidental release or insufficient ventilation; (8) All spills should be cleaned up immediately in accordance with good industrial hygiene practices; (9) Training for safe handling procedures should be provided to all employees that would be likely to handle containers of the agent or extinguishing units filled with the agent; (10) Safety features that are typical of total flooding systems such as pre-discharge alarms, time delays, and system abort switches should be provided, as directed by applicable OSHA regulations and NFPA standards; use of this agent should also conform to relevant OSHA requirements, including 29 CFR 1910, subpart L, sections 1910.160 and 1910.162.

EFFECTIVE DATE NOTE: At 89 FR 50474, June 13, 2024, appendix V to subpart G of part 82 was amended by revising the heading and the table titled, “Refrigerants—Acceptable Subject to Use Conditions”, effective July 15, 2024. For the convenience of the user, the revised text is set forth as follows:

APPENDIX V TO SUBPART G OF PART 82—SUBSTITUTES SUBJECT TO USE RESTRICTIONS AND UNACCEPTABLE SUBSTITUTES
LISTED IN THE DECEMBER 1, 2016, FINAL RULE, EFFECTIVE JANUARY 3, 2017, AND LISTED IN THE JUNE 13, 2024 FINAL
RULE, EFFECTIVE JULY 15, 2024

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS

End-use	Substitute	Decision	Use conditions	Further information
1. Commercial ice machines (self-contained) (new only) manufactured from January 3, 2017, and up to but not including 7/15/2024.	Propane (R-290)	Acceptable subject to use conditions.	This refrigerant may be used only in new equipment designed specifically and clearly identified for the refrigerant—<i>i.e.</i>, this refrigerant may not be used as a conversion or “retrofit” refrigerant for existing equipment. This refrigerant may be used only in self-contained commercial ice machines that meet requirements listed in Supplement SA to UL 563.^{1,2, 5} In cases where this rule includes requirements more stringent than those in UL 563, the equipment must meet the requirements of the final rule in place of the requirements in the UL Standard. The charge size must not exceed 150 g (5.29 oz) in each refrigerant circuit of a commercial ice machine. As provided in clauses SA6.1.1 and SA6.1.2 of UL 563, the following markings must be attached at the locations provided and must be permanent: (a) “DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. Do Not Use Mechanical Devices To Defrost Refrigerator. Do Not Puncture Refrigerant Tubing.” This marking must be provided on or near any evaporators that can be contacted by the consumer. (b) “DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing.” This marking must be located near the machine compartment.	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation), 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling propane. Special care should be taken to avoid contact with the skin since propane, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on equipment with propane. Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building.

2. Commercial ice machines (self-contained) (new only) manufactured on or after 7/15/2024, through September 29, 2024, or equipment manufactured on or after September 30, 2024, that remains unchanged, other than cosmetic changes, from an earlier model or design that was already certified to the UL 563 ^{1,2,5} standard before September 30, 2024.	Propane (R-290)	Acceptable subject to use conditions.	(c) "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." This marking must be located near the machine compartment. (d) "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." This marking must be provided on the exterior of the refrigeration equipment. (e) "CAUTION—Risk of Fire or Explosion Due To Puncture Of Refrigerant Tubing; Follow Handling Instructions Carefully. Flammable Refrigerant Used." This marking must be provided near all exposed refrigerant tubing. All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The equipment must have red Pantone® Matching System #185 marked pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch in both directions from such locations. This refrigerant may be used only in self-contained commercial ice machines that meet requirements in either: 1. Supplement SA to UL 563^{1,2,5} and listing 1 of this table or 2. ASHRAE 15-2022,^{1,7,8} UL 60335-2-89,^{1,2,6} and listing 3 of this table.

Only technicians specifically trained in handling flammable refrigerants should service equipment containing propane. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant.

If a service port is added then, commercial ice machines or equipment using propane should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. "Differ" means that either the diameter differs by at least ⅜ inch or the thread direction is reversed (*i.e.*, right-handed vs. left-handed). These different fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit and should not be accessed with an adaptor.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
3. Commercial ice machines (self-contained) (new only) manufactured on or after September 30, 2024, except for equipment manufactured on or after September 30, 2024, that remains unchanged, other than cosmetic changes, from an earlier model or design that was already certified to the UL 563 ^{1,2,5} standard before September 30, 2024.	Propane (R-290)	Acceptable subject to use conditions.	This refrigerant may be used only in new equipment specifically designed and clearly identified for the refrigerant (<i>i.e.</i>, none of these substitutes may be used as a conversion or "retrofit" refrigerant for existing equipment designed for other refrigerants). This refrigerant may be used in new commercial ice machines if and only if such equipment meets all requirements in ASHRAE 15-2022^{1,7,8}. In cases where this listing 3 includes requirements different than those of ASHRAE 15-2022^{1,7,8} the appliance would need to meet the requirements of this listing in place of the requirements in ASHRAE 15-2022. This refrigerant may only be used in commercial ice machines that meet all requirements in UL 60335-2-89,^{1,2,6} except as provided otherwise in UL 60335-2-89, in ASHRAE 15-2022, or in this listing 3. In cases where this listing includes requirements more stringent than those of UL 60335-2-89, the appliance must meet the requirements of this listing 3 in place of the requirements in the UL 60335-2-89. Where similar requirements of ASHRAE 15-2022 and UL 60335-2-89 differ, the more stringent or conservative condition shall apply unless superseded by this listing 3. The following markings must be attached at the locations provided and must be permanent:	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants.

- (a) On the outside of the equipment: "DANGER—Risk of Fire Or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing."
- (b) On the outside of the equipment: "WARNING—Risk of Fire OR Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used."
- (c) On the inside of the equipment near the compressor: "DANGER—Risk of Fire Or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting to Service This Product. All Safety Precautions Must be Followed."
- (d) For any equipment pre-charged at the factory, on the equipment packaging or on the outside of the equipment: "DANGER—Risk of Fire or Explosion due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations"
 - a. If the equipment is delivered packaged, this label shall be applied on the packaging.
 - b. If the equipment is not delivered packaged, this label shall be applied on the outside of the equipment near the control panel or nameplate.
- (e) On indoor units near the nameplate:
 - a. At the top of the marking: "Minimum Installation Height, X m (W ft)". This marking is only required if required by UL 60335–2–89. The terms "X" and "W" shall be replaced by the numeric height as calculated per UL 60335–2–89. Note that the formatting here is slightly different than the UL Standard; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.
 - b. Immediately below (a) above or at the top of the marking if (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²)". The terms "Y" and "Z" shall be replaced by the numeric area as calculated per UL 60335–2–89. Note that the formatting here is slightly different than UL 60335–2–89; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.
- (f) For non-fixed equipment, on the outside of the appliance: "WARNING—Risk of Fire or Explosion—Store in a well-ventilated room without continuously operating flames or other potential ignition."

Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely.

Room occupants should evacuate the space immediately following the accidental release of this refrigerant.

Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex 101.DVT of UL 60355–2–89.^{1,2,5}

Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from ice machine appliances are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(g) For fixed equipment that is ducted, near the nameplate: "WARNING—Risk of Fire Or Explosion—Auxiliary devices which may be ignition sources shall not be installed in the ductwork, other than auxiliary devices listed for use with the specific appliance. See instructions." (h) All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The equipment must have red Pantone® Matching System #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25 mm) in both directions from such locations and shall be replaced if removed. In addition to or instead of the markings described in Clause 7.6DV D1 of UL 60335–2–89, the equipment may display the Globally Harmonized System of Classification and Labelling of Chemicals GHS warning symbol for hazard category 1 flammable gases (black flame on a white background in a diamond with equal length sides with a red border), as defined in Chapter 2.2, Flammable Gasses, and Annex 1, Classification and Labelling Summary Tables, of ST/SG/AC.10/30/Rev.9, Global Harmonized System (GHS) of Classification and Labelling of Chemicals, Ninth revised edition^{1,11,12}: • Outside of the equipment (label (a)); • on the appliance packaging for a factory-charged unit or adjacent to the control panel or nameplate of a unit charged in place (label (d)); and • in a location visible when accessing a service port and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes) (service label). The perpendicular height of the diamond containing the GHS warning symbol for hazard category 1 flammable gases shall be at least 15 mm (⅝ in). In addition, next to the GHS warning symbol for hazard category 1 flammable gases must be text of the refrigerant safety class of the refrigerant according to ASHRAE 34–2022^{1,7,9,10} in letters at least one-third the height of the diamond symbol.	

4. Very low temperature refrigeration equipment (new only).	Propane (R-290)	Acceptable subject to use conditions.	As of January 3, 2017: This refrigerant may be used only in new equipment designed specifically and clearly identified for the refrigerant—i.e., this refrigerant may not be used as a conversion or “retrofit” refrigerant for existing equipment. This refrigerant may only be used in equipment that meets requirements in Supplement SB to UL 471.^{1,2,4} In cases where this listing 4 of this table includes requirements more stringent than those of UL 471, the appliance must meet the requirements of this listing 4 of this table in place of the requirements in UL 471. The charge size for the equipment must not exceed 150 grams (5.29 ounces) in each refrigerant circuit of the very low temperature refrigeration equipment. As provided in clauses SB6.1.2 to SB6.1.5 of UL 471, the following markings must be attached at the locations provided and must be permanent:	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(a) "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. Do Not Use Mechanical Devices To Defrost Refrigerator. Do Not Puncture Refrigerant Tubing." This marking must be provided on or near any evaporators that can be contacted by the consumer. (b) "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." This marking must be located near the machine compartment. (c) "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." This marking must be located near the machine compartment. (d) "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." This marking must be provided on the exterior of the refrigeration equipment. (e) "CAUTION—Risk of Fire or Explosion Due To Puncture Of Refrigerant Tubing; Follow Handling Instructions Carefully. Flammable Refrigerant Used." This marking must be provided near all exposed refrigerant tubing. All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The equipment must have red Pantone® Matching System #185 marked pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch in both directions from such locations.	Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling propane. Special care should be taken to avoid contact with the skin since propane, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service equipment containing propane. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. If a service port is added, then very low temperature equipment using propane should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. "Differ" means that either the diameter differs by at least 1/16 inch or the thread direction is reversed (<i>i.e.</i>, right-handed vs. left-handed). These different fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit, and should not be accessed with an adaptor. Very low temperature equipment using propane may also use another acceptable refrigerant substitute in a separate refrigerant circuit or stage (e.g., one temperature stage with propane and a second stage with ethane).

5. Water coolers (new only).	Propane (R-290)	Acceptable subject to use conditions.	This refrigerant may be used only in new equipment designed specifically and clearly identified for the refrigerant—i.e., this refrigerant may not be used as a conversion or “retrofit” refrigerant for existing equipment. This refrigerant may be used only in water coolers that meet requirements listed in Supplement SB to UL 399 ^{1,2,3} In cases where this listing 5 includes requirements more stringent than those of UL 399, the appliance must meet the requirements of this listing 5 in place of the requirements in UL 399. The charge size must not exceed 60 grams (2.12 ounces) per refrigerant circuit in the water cooler. The equipment must have red Pantone® Matching System #185 marked pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch in both directions from such locations. As provided in clauses SB6.1.2 to SB6.1.5 of UL 399, the following markings must be attached at the locations provided and must be permanent:	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), 1910.157 (portable fire extinguishers), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing hydrocarbon refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and re-entry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling propane. Special care should be taken to avoid contact with the skin since propane, like many refrigerants, can cause freeze burns on the skin. A Class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on equipment with flammable refrigerants.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(a) "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. Do Not Use Mechanical Devices To Defrost Refrigerator. Do Not Puncture Refrigerant Tubing." This marking must be provided on or near any evaporators that can be contacted by the consumer. (b) "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." This marking must be located near the machine compartment. (c) "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." This marking must be located near the machine compartment. (d) "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." This marking must be provided on the exterior of the refrigeration equipment. (e) "CAUTION—Risk of Fire or Explosion Due To Puncture Of Refrigerant Tubing; Follow Handling Instructions Carefully. Flammable Refrigerant Used." This marking must be provided near all exposed refrigerant tubing.	Any recovery equipment used should be designed for flammable refrigerants. Any refrigerant releases should be in a well-ventilated area, such as outside of a building. Only technicians specifically trained in handling flammable refrigerants should service equipment containing propane. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. If a service port is added, then water coolers or equipment using propane should have service aperture fittings that differ from fittings used in equipment or containers using non-flammable refrigerant. "Differ" means that either the diameter differs by at least 1/16 inch or the thread direction is reversed (<i>i.e.</i>, right-handed vs. left-handed). These different fittings should be permanently affixed to the unit at the point of service and maintained until the end-of-life of the unit, and should not be accessed with an adaptor.

¹ The Director of the Federal Register approves this incorporation by reference (5 U.S.C. 552(a) and 1 CFR part 51). You may inspect a copy at the U.S. EPA or at the National Archives and Records Administration (NARA). Contact the U.S. EPA at: EPA Docket Center, WJC West Building, Room 3334, 1301 Constitution Avenue NW, Washington, DC 20004, www.epa.gov/dockets; (202) 202–1744. For information on the availability of this material at NARA, visit www.archives.gov/federal-register/cfr/ibr-locations or email fr.inspection@nara.gov.

² You may obtain the UL material from: Underwriters Laboratories Inc. (UL) COMM 2000; 151 Eastern Avenue; Bensenville, IL 60106; phone: 1–888–853–3503 in the U.S. or Canada (other countries +1–415–352–2168); email: orders@shopulstandards.com; website: <https://ulstandards.ul.com> or www.shopulstandards.com.

³ UL 399, Standard for Safety: Drinking Water Coolers- Supplement SB: Requirements for Drinking Water Coolers Employing a Flammable Refrigerant in the Refrigerating System, 7th edition, dated August 22, 2008, including revisions through October 17, 2013.

⁴ UL 471, Standard for Safety: Commercial Refrigerators and Freezers. Supplement SB: Requirements for Refrigerators and Freezers Employing a Flammable Refrigerant in the Refrigerating System, 10th edition, dated November 24, 2010.

⁵ UL 563, Standard for Safety: Ice Makers, Supplement SA: Requirements for Ice Makers Employing a Flammable Refrigerant in the Refrigerating System, 8th edition, dated July 31, 2009, including revisions through November 29, 2013.

⁶ UL 60335–2–89, Standard for Safety for Household and Similar Electrical Appliances—Safety—Part 2–89: Particular Requirements for Commercial Refrigerating Appliances, 2nd edition, dated October 27, 2021.

⁷ You may obtain the ANSI/ASHRAE material from: American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE), 180 Technology Parkway NW, Peachtree Corners, Georgia 30092; phone: 1–800–527–4723 or 1–404–636–8400 in the U.S. or Canada; email: cservice@ashrae.org; website: <https://www.ashrae.org/technical-resources/bookstore/ashrae-refrigeration-resources>.

⁸ ANSI/ASHRAE Standard 15–2022. Safety Standard for Refrigeration Systems, copyright 2022.

⁹ ANSI/ASHRAE Standard 34–2022. Designation and Safety Classification of Refrigerants, copyright 2022.

¹⁰ ANSI/ASHRAE Addendum a to ANSI/ASHRAE Standard 34–2022, Designation and Safety Classification of Refrigerants, ANSI/ASHRAE-approved December 20, 2022.

¹¹ You may obtain the UN material from the United Nations Publications section at: <https://shop.un.org/books/global-harmon-syst-class-9-92280>; by mail: United Nations Publications Customer Service, PO Box 960, Herndon, VA 20172; phone: 1–703–661–1571; email: order@un.org.

¹² ST/SG/AC.10/30/Rev.9, Global Harmonized System (GHS) of Classification and Labelling of Chemicals, Ninth revised edition, copyright 2021; Chapter 2.2, Flammable Gasses, and Annex 1, Classification and Labelling Summary Tables.

* * * * *

APPENDIX W TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE MAY 6, 2021 FINAL RULE—EFFECTIVE JUNE 7, 2021

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO NARROWED USE LIMITS

End-use	Substitute	Decision	Narrowed use limits	Further information
Retail food refrigeration— medium-temperature stand-alone units (new only).	R-448A, R-449A, R-449B.	Acceptable Subject to Narrowed Use Limits.	Acceptable only for use in new medium-temperature stand-alone units where reasonable efforts have been made to ascertain that other alternatives are not technically feasible. Users are required to document and retain the results of their technical investigation of alternatives for the purpose of demonstrating compliance. Information shall include descriptions of: • Process or product in which the substitute is needed; • Substitutes examined and rejected; • Reason for rejection of other alternatives, <i>e.g.</i>, performance, technical or safety standards; and • Anticipated date other substitutes will be available and projected time for switching.	A possible reason for rejection of one or more other alternative(s) could be based on ADA requirements.

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO USE CONDITIONS

End-use	Substitute	Decision	Use conditions	Further information
Residential and light commercial air conditioning and heat pumps (new only).	R-452B, R-454A, R-454B, R-454C and R-457A.	Acceptable Subject to Use Conditions.	These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerants (<i>i.e.</i>, none of these substitutes may be used as a conversion or “retrofit” refrigerant for existing equipment designed for other refrigerants). These substitutes may only be used in air conditioning equipment that meets all requirements in the 3rd edition of UL 60335–2–40.^{1 2 3} In cases where this appendix includes requirements more stringent than those of UL 60335–2–40, the appliance must meet the requirements of this appendix in place of the requirements in the UL Standard. The charge size for the equipment must not exceed the maximum refrigerant mass determined according to UL 60335–2–40 for the room size where the air conditioner is used.	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and reentry should occur only after the space has been properly ventilated.

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			The following markings must be attached at the locations provided and must be permanent: (a) On the outside of the air conditioning equipment: "WARNING—Risk of Fire. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (b) On the outside of the air conditioning equipment: "WARNING—Risk of Fire. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (c) On the inside of the air conditioning equipment near the compressor: "WARNING—Risk of Fire. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." (d) For any equipment pre-charged at the factory, on the equipment packaging: "WARNING—Risk of Fire due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations." (e) On the indoor unit near the nameplate: a. At the top of the marking: "Minimum Installation height, X m (W ft)". This marking is only required if required by UL 60335-2-40. The terms "X" and "W" shall be replaced by the numeric height as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. b. Immediately below (a) above or at the top of the marking if (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²)". The terms "Y" and "Z" shall be replaced by the numeric area as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. (f) For non-fixed equipment, including portable air conditioners, window air conditioners, packaged terminal air conditioners and packaged terminal heat pumps, on the outside of the product: "WARNING—Risk of Fire or Explosion—Store in a well ventilated room without continuously operating flames or other potential ignition."	Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing these refrigerants. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with these refrigerants should obtain training and follow practices consistent with Annex HH of UL 60335-2-40, 3rd edition.^{1 2 3} CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration. Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from residential and light commercial air conditioning appliances are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260-270).

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
Residential and light commercial air conditioning and heat pumps (new only), excluding self-contained room air conditioners.	R-32	Acceptable Subject to Use Conditions.	(g) For fixed equipment, including rooftop units and split air conditioners, "WARNING—Risk of Fire—Auxiliary devices which may be ignition sources shall not be installed in the ductwork, other than auxiliary devices listed for use with the specific appliance. See instructions." (h) All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The equipment must have red Pantone Matching System (PMS) #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25mm) in both directions from such locations and shall be replaced if removed. These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerants (<i>i.e.</i>, none of these substitutes may be used as a conversion or "retrofit" refrigerant for existing equipment designed for other refrigerants). These substitutes may only be used in air conditioning equipment that meets all requirements in the 3rd edition of UL 60335–2–40.^{1,2,3} In cases where this appendix includes requirements more stringent than those of UL 60335–2–40, the appliance must meet the requirements of this appendix in place of the requirements in the UL Standard. The charge size for the equipment must not exceed the maximum refrigerant mass determined according to UL 60335–2–40 for the room size where the air conditioner is used.	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated and reentry should occur only after the space has been properly ventilated.

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			The following markings must be attached at the locations provided and must be permanent: (a) On the outside of the air conditioning equipment: "WARNING—Risk of Fire. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (b) On the outside of the air conditioning equipment: "WARNING—Risk of Fire. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (c) On the inside of the air conditioning equipment near the compressor: "WARNING—Risk of Fire. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." (d) For any equipment pre-charged at the factory, on the equipment packaging: "WARNING—Risk of Fire due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations" (e) On the indoor unit near the nameplate: a. At the top of the marking: "Minimum Installation height, X m (W ft)". This marking is only required if required by UL 60335-2-40. The terms "X" and "W" shall be replaced by the numeric height as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. b. Immediately below (a) above or at the top of the marking if (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²)". The terms "Y" and "Z" shall be replaced by the numeric area as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. (f) For fixed equipment, including rooftop units and split air conditioners, "WARNING—Risk of Fire—Auxiliary devices which may be ignition sources shall not be installed in the ductwork, other than auxiliary devices listed for use with the specific appliance. See instructions." (g) All of these markings must be in letters no less than 6.4 mm (¼ inch) high.	Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex HH of UL 60335-2-40, 3rd edition.^{1 2 3} CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration. Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from residential and light commercial air conditioning appliances are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260-270).

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			The equipment must have red Pantone Matching System (PMS) #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25mm) in both directions from such locations and shall be replaced if removed.	

¹ UL 60335–2–40, Standard for Safety for Household And Similar Electrical Appliances—Safety—Part 2–40: Particular Requirements for Electrical Heat Pumps, Air-Conditioners and Dehumidifiers, Third edition, Dated November 1, 2019.

² You may purchase the material from UL by mail: Comm 2000; 151 Eastern Avenue; Bensenville, IL 60106; email: orders@shopulstandards.com; phone: 1–888–853–3503 in the U.S. or Canada (other countries dial +1–415–352–2168); or web: www.shopulstandards.com.

³ The Director of the Federal Register approves this incorporation by reference in accordance with 5 U.S.C. 552(a) and 1 CFR part 51. All approved material is available for inspection at U.S. EPA's Air and Radiation Docket; EPA West Building, Room 3334, 1301 Constitution Ave. NW, Washington, DC, 202–566–1742 and is available from Underwriters Laboratories Inc. (UL), 333 Pfingsten Road, Northbrook, IL 60062, 877.854.3577, www.ul.com. It is also available for inspection at the National Archives and Records Administration (NARA). For information on the availability of this material at NARA, email fedreg.legal@nara.gov, or go to: www.archives.gov/federal-register/cfr/ibr-locations.html.

[86 FR 24471, May 6, 2021]

Environmental Protection Agency

Pt. 82, Subpt. G, App. X

APPENDIX X TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE APRIL 28, 2023
FINAL RULE—EFFECTIVE MAY 30, 2023

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO NARROWED USE LIMITS

End-use	Sub- stitute	Deci- sion	Narrowed use limits	Further information
1. Very low temperature refrigeration (new only).	R-1150	Acceptable Subject to Use Conditions and Narrowed Use Limits.	• Temperature range—R-1150 may only be used in equipment designed specifically to reach temperatures lower than -80°C (-112°F). • The manufacturers of new very low temperature equipment need to demonstrate that other alternatives are not technically feasible. They must document the results of their evaluation that showed the other alternatives to be not technically feasible and maintain that documentation in their files. This documentation, which does not need to be submitted to EPA unless requested to demonstrate compliance, "shall include descriptions of substitutes examined and rejected, processes or products in which the substitute is needed, reason for rejection of other alternatives, e.g., performance, technical or safety standards, and the anticipated date other substitutes will be available and projected time for switching to other available substitutes." (40 CFR 82.180(b)(3)).	

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO USE CONDITIONS

End-use	Substitute	Decision	Use conditions	Further information
1. Centrifugal Chillers for comfort cooling and Industrial Process Air Conditioning. Positive Displacement Chillers for comfort cooling and Industrial Process Air Conditioning.	HFC–32, HFO–1234yf, R–452B, R–454A, R–454B, R–454C.	Acceptable Subject to Use Conditions.	These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerant (<i>i.e.</i>, none of these substitutes may be used as a conversion or “retrofit” refrigerant for existing equipment designed for other refrigerants). These substitutes may only be used in air conditioning equipment that meets all requirements in UL 60335–2–40.^{1,3,5} In cases where this listing 1 includes requirements more stringent than those of UL 60335–2–40, the appliance must meet the requirements of this listing 1 in place of the requirements in the UL 60335–2–40. These refrigerants may be used in chillers if and only if such chiller meets all requirements listed in ASHRAE 15–2019.^{1,2,4} In cases where this listing 1 includes requirements different than those of ASHRAE 15–2019, the appliance must meet the requirements of this listing 1 in place of the requirements in ASHRAE 15–2019. Where similar requirements of ASHRAE 15–2019 and UL 60335–2–40 differ, the more stringent or conservative condition shall apply unless superseded by this listing 1. The following markings must be attached at the locations provided and must be permanent: (a) On the outside of the equipment: “WARNING—Risk of Fire. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel, Do Not Puncture Refrigerant Tubing.” (b) On the outside of the equipment: “WARNING—Risk of Fire. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used.”	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely.

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(c) On the inside of the equipment near the compressor: "WARNING—Risk of Fire. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting to Service This Product. All Safety Precautions Must be Followed." (d) For any equipment pre-charged at the factory, on the equipment packaging or on the outside of the equipment: "WARNING—Risk of Fire due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations" a. If the equipment is delivered packaged, this label shall be applied on the packaging. b. If the equipment is not delivered packaged, this label shall be applied on the outside of the equipment near the control panel or nameplate. (e) On the equipment near the nameplate: a. At the top of the marking: "Minimum Installation Height, X m (W ft)." This marking is only required if required by UL 60335-2-40. The terms "X" and "W" shall be replaced by the numeric height as calculated per UL 60335-2-40. Note that the formatting here is slightly different than UL 60335-2-40; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.	Room occupants should evacuate the space immediately following the accidental release of this refrigerant. Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex HH of UL 60335-2-40, 3rd edition.³⁵ CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration. Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from residential and light commercial air conditioning appliances are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			b. Immediately below marking (a) of this listing 1or at the top of the marking if marking (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²)." The terms "Y" and "Z" shall be replaced by the numeric area as calculated per UL 60335–2–40. Note that the formatting here is slightly different than UL 60335–2–40; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. (f) For non-fixed equipment, on the outside of the product: "WARNING—Risk of Fire or Explosion—Store in a well-ventilated room without continuously operating flames or other potential ignition." (g) For fixed equipment that is ducted, near the nameplate: "WARNING—Risk of Fire—Auxiliary devices which may be ignition sources shall not be installed in the ductwork, other than auxiliary devices listed for use with the specific appliance. See instructions." (h) All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The equipment must have red Pantone® Matching System (PMS) #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25 mm) in both directions from such locations and shall be replaced if removed.	

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
2. Residential Dehumidifiers.	HFO—1234yf, HFC—32, R—452B, R—454A, R—454B, and R—454C.	Acceptable Subject to Use Conditions.	These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerant (<i>i.e.</i>, none of these substitutes may be used as a conversion or “retrofit” refrigerant for existing equipment designed for other refrigerants). These substitutes may only be used in dehumidifier equipment that meets all requirements in UL 60335–2–40.^{1,3,5} In cases where this listing 2 includes requirements more stringent than those of UL 60335–2–40, the appliance must meet the requirements of this listing 2 in place of the requirements in UL 60335–2–40. The following markings must be attached at the locations provided and must be permanent: (a) On the outside of the equipment: “WARNING—Risk of Fire. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing.” (b) On the outside of the equipment: “WARNING—Risk of Fire. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used.” (c) On the inside of the equipment near the compressor: “WARNING—Risk of Fire. Flammable Refrigerant Used. Consult Repair Manual/Owner’s Guide Before Attempting to Service This Product. All Safety Precautions Must be Followed.” (d) For any equipment pre-charged at the factory, on the equipment packaging or on the outside of the equipment: “WARNING—Risk of Fire due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations” a. If the equipment is delivered packaged, this label shall be applied on the packaging. b. If the equipment is not delivered packaged, this label shall be applied on the outside of the equipment near the control panel or nameplate.	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex HH of UL 60335–2–40.^{3,5}

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(e) On the equipment near the nameplate: a. At the top of the marking: "Minimum Installation Height, X m (W ft)." This marking is only required if required by UL 60335–2–40. The terms "X" and "W" shall be replaced by the numeric height as calculated per UL 60335–2–40. Note that the formatting here is slightly different than UL 60335–2–40; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. b. Immediately below marking (a) of this listing 2 or at the top of the marking if marking (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²)." The terms "Y" and "Z" shall be replaced by the numeric area as calculated per UL 60335–2–40. Note that the formatting here is slightly different than UL 60335–2–40; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. (f) On the outside of the product: "WARNING—Risk of Fire or Explosion—Store in a well-ventilated room without continuously operating flames or other potential ignition." (g) All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The equipment must have red Pantone® Matching System (PMS) #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25 mm) in both directions from such locations and shall be replaced if removed.	CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration. Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from residential and light commercial air conditioning appliances are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
3. Very Low Temperature Refrigeration.	R-1150 ..	Acceptable Subject to Use Conditions.	R-1150 may be used only in new equipment specifically designed and clearly identified for the refrigerant (<i>i.e.</i>, none of these substitutes may be used as a conversion or "retrofit" refrigerant for existing equipment designed for other refrigerants). R-1150 may only be used in laboratory equipment that meet all requirements in UL 61010-2-011.¹³⁶ In cases where this listing 3 includes requirements more stringent than those of UL 61010-2-011, the appliance must meet the requirements of this listing 3 in place of the requirements in UL 61010-2-011. Requirements of note include: (a) Warning labels—The following markings, or the equivalent, must be provided in letters no less than 6.4 mm (¼ inch) high and must be permanent: (b) Attach near the machine compartment: "DANGER—Risk of Fire or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing"	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin.

REFRIGERANTS—SUBSTITUTES ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(c) Attach near the machine compartment: "CAUTION—Risk of Fire or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting To Service This Product. All Safety Precautions Must be Followed." (d) Attach on the exterior of the refrigeration equipment: "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (e) Attach near all exposed refrigerant tubing: "CAUTION—Risk of Fire or Explosion Due To Puncture Of Refrigerant Tubing; Follow Handling Instructions Carefully. Flammable Refrigerant Used." (f) Attach on the exterior of the refrigeration equipment: "This equipment is intended for use in commercial, industrial, or institutional occupancies as defined in the Safety Standard for Refrigeration Systems, ANSI/ASHRAE 15." (g) Attach on the exterior of the shipping carton: "CAUTION—Risk of Fire or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations." (h) The instructions shall include the following warnings as necessary: a. "WARNING: Ensure all ventilation openings are not obstructed." b. "WARNING: Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer." c. "WARNING: Do not damage the refrigerant circuit." Equipment must have distinguishing red (Pantone® Matching System (PMS) #185 or RAL 3020) color-coded hoses and piping to indicate use of a flammable refrigerant. The laboratory equipment shall have marked service ports, pipes, hoses and other devices through which the refrigerant is serviced. Markings shall extend at least 1 inch (25 mm) from the servicing port and shall be replaced if removed. Equipment must use no more than 150 g of R–1150 in each refrigerant circuit using this refrigerant.	A class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex HH of UL 60335–2–40.^{3,5} CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration. Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from residential and light commercial air conditioning appliances are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

¹ The Director of the Federal Register approves this incorporation by reference (5 U.S.C. 552(a) and 1 CFR part 51). You may inspect a copy at the U.S. EPA or at the National Archives and Records Administration (NARA). Contact the U.S. EPA at: EPA Docket Center, WJC West Building, Room 3334, 1301 Constitution Avenue NW, Washington, DC 20004, www.epa.gov/dockets, (202) 202–1744. For information on the availability of this material at NARA, visit www.archives.gov/federal-register/cfr/ibr-locations.html or email fr.inspection@nara.gov.

² You may obtain this material from: American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE), 180 Technology Parkway NW, Peachtree Corners, Georgia 30092; phone: 404–636–8400; website: www.ashrae.org.

³ You may obtain this material from: Underwriters Laboratories Inc. (UL) COMM 2000; 151 Eastern Avenue, Bensenville, IL 60106; phone: 415–352–2168; email: orders@comm-2000.com; website: <https://ulstandards.ul.com/> or www.comm-2000.com.

⁴ ANSI/ASHRAE Standard 15–2019, Safety Standard for Refrigeration Systems, Copyright 2019, including the following addenda to ANSI/ASHRAE Standard 15–2019, Safety Standard for Refrigeration Systems:

Addendum a, ANSI—approved February 6, 2020.

Addendum b, ANSI—approved February 6, 2020.

Addendum c, ANSI—approved September 1, 2020.

Addendum d, ANSI—approved April 29, 2022.

Environmental Protection Agency

Pt. 82, Subpt. G, App. X

Addendum e, ANSI—approved January 27, 2022.
 Addendum f, ANSI—approved September 30, 2020.
 Addendum i, ANSI—approved July 31, 2020.
 Addendum j, ANSI—approved October 30, 2020.
 Addendum k, ANSI—approved October 30, 2020.
 Addendum m, ANSI—approved June 30, 2022.
 Addendum n, ANSI—approved May 31, 2022.
 Addendum o, ANSI—approved April 29, 2022.
 Addendum q, ANSI—approved May 31, 2022.
 Addendum r, ANSI—approved May 31, 2022.
⁵ UL 60335-2-40, Standard for Safety: Household And Similar Electrical Appliances—Safety—Part 2-40: Particular Requirements for Electrical Heat Pumps, Air-Conditioners and Dehumidifiers, 3rd edition, Dated November 1, 2019.
⁶ UL 61010-2-011, Standard for Safety: Safety Requirements for Electrical Equipment for Measurement, Control, and Laboratory Use—Part 011: Particular Requirements for Refrigerating Equipment, 2nd edition, Dated May 13, 2021.

FIRE SUPPRESSION AND EXPLOSION PROTECTION AGENTS—ACCEPTABLE SUBJECT TO USE CONDITIONS

End-use	Substitute	Decision	Use conditions	Further information
1. Total Flooding	2-BTP ...	Acceptable Subject to Use Conditions.	Acceptable only for use in normally unoccupied spaces under 500 ft ³ .	This fire suppressant has a relatively low GWP of 0.23–0.26 and a short atmospheric lifetime of approximately seven days. This agent is subject to a TSCA section 5(a)(2) SNUR. For establishments manufacturing, installing and maintaining equipment using this agent, EPA recommends the following: • This agent should be used in accordance with the safety guidelines in the latest edition of NFPA 2001, Standard on Clean Agent Fire Extinguishing Systems;¹ • In the case that 2-BTP is inhaled, person(s) should be immediately removed and exposed to fresh air; if breathing is difficult, person(s) should seek medical attention; • Eye wash and quick drench facilities should be available. In case of ocular exposure, person(s) should immediately flush the eyes, including under the eyelids, with fresh water and move to a non-contaminated area; • Exposed persons should remove all contaminated clothing and footwear to avoid irritation; and medical attention should be sought if irritation develops or persists; • Although unlikely, in case of ingestion of 2-BTP, the person(s) should consult a physician immediately; • Manufacturing space should be equipped with specialized engineering controls and well ventilated with a local exhaust system and low-lying source ventilation to effectively mitigate potential occupational exposure; regular testing and monitoring of the workplace atmosphere should be conducted; • Employees responsible for chemical processing should wear the appropriate PPE, such as protective gloves, tightly sealed goggles, protective work clothing, and suitable respiratory protection in case of accidental release or insufficient ventilation; • All spills should be cleaned up immediately in accordance with good industrial hygiene practices; and

FIRE SUPPRESSION AND EXPLOSION PROTECTION AGENTS—ACCEPTABLE SUBJECT TO USE
CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
2. Streaming	2–BTP ...	Acceptable, Subject to Use Conditions.	Acceptable only for use in non-residential applications, except for commercial home office and personal watercraft.	• Training for safe handling procedures should be provided to all employees that would be likely to handle containers of the agent or extinguishing units filled with the agent. • Safety features that are typical of total flooding systems such as predischARGE alarms, time delays, and system abort switches should be provided, as directed by applicable OSHA regulations and NFPA standards.¹ Use of this agent should also conform to relevant OSHA requirements, including 29 CFR 1910.160 and 1910.162. See notes 1 through 5 to this table. This fire suppressant has a relatively low GWP of 0.23–0.26 and a short atmospheric lifetime of approximately seven days. This agent is subject to a TSCA section 5(a)(2) SNUR. For establishments manufacturing, installing and maintaining equipment using this agent, EPA recommends the following: • This agent should be used in accordance with the safety guidelines in the latest edition of NFPA 10, Standard for Portable Fire Extinguishers;¹ • In the case that 2–BTP is inhaled, person(s) should be immediately removed and exposed to fresh air; if breathing is difficult, person(s) should seek medical attention; • Eye wash and quick drench facilities should be available. In case of ocular exposure, person(s) should immediately flush the eyes, including under the eyelids, with fresh water and move to a non-contaminated area; • Exposed persons should remove all contaminated clothing and footwear to avoid irritation; and medical attention should be sought if irritation develops or persists; • Although unlikely, in case of ingestion of 2–BTP, the person(s) should consult a physician immediately; • Manufacturing space should be equipped with specialized engineering controls and well ventilated with a local exhaust system and low-lying source ventilation to effectively mitigate potential occupational exposure; regular testing and monitoring of the workplace atmosphere should be conducted; • Employees responsible for chemical processing should wear the appropriate PPE, such as protective gloves, tightly sealed goggles, protective work clothing, and suitable respiratory protection in case of accidental release or insufficient ventilation; • All spills should be cleaned up immediately in accordance with good industrial hygiene practices; and

FIRE SUPPRESSION AND EXPLOSION PROTECTION AGENTS—ACCEPTABLE SUBJECT TO USE
CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
3. Total Flooding	EXXFIRE [®] .	Acceptable Subject to Use Conditions.	Acceptable only for use in normally unoccupied spaces.	• Training for safe handling procedures should be provided to all employees that would be likely to handle containers of the agent or extinguishing units filled with the agent. See notes 1 through 5 to this table. • Use of this agent should be in accordance with the safety guidelines in the latest edition of the NFPA 2001, Standard on Clean Agent Fire Extinguishing Systems.¹ • For establishments manufacturing, installing and maintaining equipment using this agent, EPA recommends the following: • In the case that EXXFIRE[®] is inhaled, person(s) should be immediately removed and exposed to fresh air. • Eye wash and quick drench facilities should be available. In case of ocular exposure, person(s) should immediately flush the eyes with water for a minimum of 15 minutes. • In the case of dermal exposure, the SDS recommends that person(s) should remove large grain particles, rinse with water for a minimum of 15 minutes, and remove all contaminated clothing. • Manufacturing space should be equipped with engineering controls, specifically an adequate exhaust ventilation system, to effectively mitigate potential occupational exposure. • Employees responsible for chemical processing should wear the appropriate personnel protective equipment (PPE), such as protective gloves, tightly sealed goggles, protective work clothing, and suitable respiratory protection in case of accidental release or insufficient ventilation. • All spills should be cleaned up immediately in accordance with good industrial hygiene practices. • Training for safe handling procedures should be provided to all employees that would be likely to handle containers of the agent or extinguishing units filled with the agent. • Safety features that are typical of total flooding systems such as predischage alarms, time delays, and system abort switches should be provided, as directed by applicable OSHA regulations and NFPA standards.¹ See notes 1 through 5 to this table. Use of this agent should be in accordance with the safety guidelines in the latest edition of NFPA 2010, Standard for Fixed Aerosol Fire Extinguishing Systems.¹ For establishments manufacturing, installing, and maintaining equipment using this agent, EPA recommends the following:
4. Total Flooding	Powdered Aerosol H.	Acceptable Subject to Use Conditions.	Acceptable only for use in normally unoccupied spaces.	See notes 1 through 5 to this table. Use of this agent should be in accordance with the safety guidelines in the latest edition of NFPA 2010, Standard for Fixed Aerosol Fire Extinguishing Systems.¹ For establishments manufacturing, installing, and maintaining equipment using this agent, EPA recommends the following:

FIRE SUPPRESSION AND EXPLOSION PROTECTION AGENTS—ACCEPTABLE SUBJECT TO USE
CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
				- Workers should use appropriate safety and protective equipment (e.g., protective gloves, tightly sealed goggles, protective work clothing, and particulate-removing respirators using NIOSH type N95 or better filters) consistent with OSHA guidelines. - A local exhaust system should be installed and operated to provide adequate ventilation to reduce airborne exposure to Powdered Aerosol H constituents. - An eye wash fountain and quick drench facility should be close to the production area. - Training for safe handling procedures should be provided to all employees that would be likely to handle the containers of the agent or extinguishing units filled with the agent. - Workers responsible for cleanup should allow particulates to settle before reentering area and wear appropriate personal protective equipment. - All spills should be cleaned up immediately in accordance with good industrial hygiene practices. See notes 1 through 5 to this table.

¹ National Fire Protection Association (NFPA) standards are available from www.nfpa.org.

Note 1: EPA recommends that users consult Section VIII of the OSHA Technical Manual for information on selecting the appropriate types of personal protective equipment for all listed fire suppression agents. EPA has no intention of duplicating or displacing OSHA coverage related to the use of personal protective equipment (e.g., respiratory protection), fire protection, hazard communication, worker training or any other occupational safety and health standard with respect to halon substitutes.

Note 2: Use of all listed fire suppression agents should conform to relevant OSHA requirements, including 29 CFR 1910.160 and 1910.162.

Note 3: Per OSHA requirements, protective gear (SCBA) should be available in the event personnel should reenter the area.

Note 4: Discharge testing should be strictly limited to that which is essential to meet safety or performance requirements.

Note 5: The agent should be recovered from the fire protection system in conjunction with testing or servicing and recycled for later use or destroyed.

[88 FR 26424, Apr. 28, 2023]

APPENDIX Y TO SUBPART G OF PART 82—SUBSTITUTES LISTED IN THE JUNE 13, 2024, FINAL RULE, EFFECTIVE JULY 15, 2024

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS

End-use	Substitute	Decision	Use conditions	Further information
1. Retail Food Refrigeration—Stand-alone units and refrigerated food processing and dispensing equipment, excluding refrigerated food processing and dispensing equipment that is within the scope of UL 621 (Ice Cream Makers) (New only).	HFO–1234yf, HFO–1234ze(E), R–454C, R–455A, R–457A, and R–516A.	Acceptable subject to use conditions.	These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerant (<i>i.e.</i>, none of these substitutes may be used as a conversion or “retrofit” refrigerant for existing equipment designed for other refrigerants). These refrigerants may be used in stand-alone units and refrigerated food processing and dispensing equipment if and only if such equipment meets requirements listed in ASHRAE 15–2022.^{1 4 5} In cases where this listing includes requirements different than those of ASHRAE 15–2022, the appliance would need to meet the requirements of this listing 1 in place of the requirements in ASHRAE 15–2022. These refrigerants may only be used in refrigeration equipment that meets all requirements in UL 60335–2–89,^{1 2 3} except as provided otherwise in UL 60335–2–89, in ASHRAE 15–2022, or in this listing 1. This listing 1 does not apply to refrigerated food processing and dispensing equipment that is within the scope of UL 621 (Ice Cream Makers). In cases where this listing includes requirements more stringent than those of UL 60335–2–89, the appliance must meet the requirements of this listing 1 in place of the requirements in UL 60335–2–89. Where similar requirements of ASHRAE 15–2022 and UL 60335–2–89 differ, the more stringent or conservative condition shall apply unless superseded by this listing 1. The following markings must be attached at the locations provided and must be permanent:	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). It is the obligation of regulated entities to inform themselves of and comply with any other applicable legal obligations or restrictions. Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(a) On the outside of the equipment: "WARNING—Risk of Fire. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (b) On the outside of the equipment: "WARNING—Risk of Fire. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (c) On the inside of the equipment near the compressor: "WARNING—Risk of Fire. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting to Service This Product. All Safety Precautions Must be Followed." (d) For any equipment pre-charged at the factory, on the equipment packaging or on the outside of the equipment: "WARNING—Risk of Fire due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations" a. If the equipment is delivered packaged, this label shall be applied on the packaging. b. If the equipment is not delivered packaged, this label shall be applied on the outside of the equipment near the control panel or nameplate. (e) On the equipment near the nameplate: a. At the top of the marking: "Minimum Installation Height, X m (W ft)". This marking is only required if required by UL 60335–2–89. The terms "X" and "W" shall be replaced by the numeric height as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. b. Immediately below (a) above or at the top of the marking if (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²)". The terms "Y" and "Z" shall be replaced by the numeric area as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.	Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex 101.DVT of UL 60355–2–89.^{1 2 3} CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration. Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from retail food refrigeration appliances are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

(f) For non-fixed equipment, on the outside of the product: "WARNING—Risk of Fire or Explosion—Store in a well-ventilated room without continuously operating flames or other potential ignition."

(g) For fixed equipment that is ducted, near the nameplate: "WARNING—Risk of Fire—Auxiliary devices which may be ignition sources shall not be installed in the ductwork, other than auxiliary devices listed for use with the specific appliance. See instructions."

(h) All of these markings must be in letters no less than 6.4 mm ($\frac{1}{4}$ inch) high.

The equipment must have red Pantone® Matching System #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25mm) in both directions from such locations and shall be replaced if removed.

In addition to or instead of the markings described in Clause 7.6DV D1 of UL 60335–2–89, the equipment may display the GHS warning symbol for hazard category 1 flammable gases (black flame on a white background in a diamond with equal length sides with a red border) as defined in Chapter 2.2, Flammable Gasses, and Annex 1, Classification and Labelling Summary Tables, of ST/SG/AC.10/30/Rev.9, Global Harmonized System (GHS) of Classification and Labelling of Chemicals, Ninth revised edition^{1 8 9} on the following three locations:

- Outside of the equipment (label (a));
- on the appliance packaging for a factory-charged unit or adjacent to the control panel or nameplate of a unit charged in place (label (d)); and
- in a location visible when accessing a service port and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes) (service label).

The perpendicular height of the diamond containing the GHS warning symbol for hazard category 1 flammable gases shall be at least 15 mm ($\frac{9}{16}$ in). In addition, next to the GHS warning symbol for hazard category 1 flammable gases must be text of the refrigerant safety class of the refrigerant according to ASHRAE 34–2022,^{1 4 6 7} in letters at least one-third the height of the diamond symbol.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
2. Retail Food Refrigeration—Refrigerated food processing and dispensing equipment (New only)—excluding refrigerated food processing and dispensing equipment that is within the scope of UL 621 (Ice Cream Makers).	Propane (R-290)	Acceptable subject to use conditions.	This refrigerant may be used only in new equipment specifically designed and clearly identified for the refrigerant (<i>i.e.</i>, the substitute may not be used as a conversion or “retrofit” refrigerant for existing equipment designed for other refrigerants). This refrigerant may be used in refrigerated food processing and dispensing equipment if and only if such equipment meets requirements listed in ASHRAE 15–2022.^{1 4 5} In cases where this listing 2 includes requirements different than those of ASHRAE 15–2022, the appliance would need to meet the requirements of this listing 2 in place of requirements in the ASHRAE Standard. These refrigerants may only be used in refrigeration equipment that meets all requirements in UL 60335–2–89,^{1 2 3} except as provided otherwise in UL 60335–2–89, in ASHRAE 15–2022, or in this listing 2. This listing 2 does not apply to refrigerated food processing and dispensing equipment that is within the scope of UL 621 (Ice Cream Makers). In cases where this listing includes requirements more stringent than those of UL 60335–2–89, the appliance must meet the requirements of this listing 2 in place of the requirements in UL 60335–2–89. Where similar requirements of ASHRAE 15–2022 and UL 60335–2–89 differ, the more stringent or conservative condition shall apply unless superseded by this listing 2. The following markings must be attached at the locations provided and must be permanent:	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). It is the obligation of regulated entities to inform themselves of and comply with any other applicable legal obligations or restrictions. Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants.

- (a) On the outside of the equipment: "DANGER—Risk of Fire Or Explosion. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing."
- (b) On the outside of the equipment: "WARNING—Risk of Fire Or Explosion. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used."
- (c) On the inside of the equipment near the compressor: "DANGER—Risk Of Fire Or Explosion. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting to Service This Product. All Safety Precautions Must be Followed."
- (d) For any equipment pre-charged at the factory, on the equipment packaging or on the outside of the equipment: "DANGER—Risk of Fire or Explosion due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations"
 - a. If the equipment is delivered packaged, this label shall be applied on the packaging.
 - b. If the equipment is not delivered packaged, this label shall be applied on the outside of the equipment near the control panel or nameplate.
- (e) On the equipment near the nameplate:
 - a. At the top of the marking: "Minimum Installation Height, X m (W ft)". This marking is only required if required by UL 60335–2–89. The terms "X" and "W" shall be replaced by the numeric height as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.
 - b. Immediately below (a) above or at the top of the marking if (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²)". The terms "Y" and "Z" shall be replaced by the numeric area as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.
- (f) For non-fixed equipment, on the outside of the product: "WARNING—Risk of Fire or Explosion—Store in a well-ventilated room without continuously operating flames or other potential ignition."

Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely.

Room occupants should evacuate the space immediately following the accidental release of this refrigerant.

Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex 101.DVT of UL 260355–2–89.^{1 2 3}

CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration.

Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from retail food refrigeration appliances are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(g) For fixed equipment that is ducted, near the nameplate: "WARNING—Risk of Fire or Explosion—Auxiliary devices which may be ignition sources shall not be installed in the ductwork, other than auxiliary devices listed for use with the specific appliance. See instructions." (h) All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The equipment must have red Pantone® Matching System #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25mm) in both directions from such locations and shall be replaced if removed. In addition to or instead of the markings described in Clause 7.6DV D1 of UL 60335–2–89, the equipment may display the GHS warning symbol for hazard category 1 flammable gases (black flame on a white background in a diamond with equal length sides with a red border), as defined in Chapter 2.2, Flammable Gasses, and Annex 1, Classification and Labelling Summary Tables, of ST/SG/AC.10/30/Rev.9, Global Harmonized System (GHS) of Classification and Labelling of Chemicals, Ninth revised edition^{1 8 9} on the following three locations: • Outside of the equipment (label (a)); • on the appliance packaging for a factory-charged unit or adjacent to the control panel or nameplate of a unit charged in place (label (d)); and • in a location visible when accessing a service port and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes) (service label). The perpendicular height of the diamond containing the GHS warning symbol for hazard category 1 flammable gases shall be at least 15 mm (¾ in). In addition, next to the GHS warning symbol for hazard category 1 flammable gases must be text of the refrigerant safety class of the refrigerant according to ASHRAE 34–2022.^{1 4 6 7} in letters at least one-third the height of the diamond symbol.	

3. Retail Food Refrigeration—Remote condensing units and supermarket systems (New only).	HFO–1234yf, HFO–1234ze(E), R–454A, R–454C, R–455A, R–457A, and R–516A.	Acceptable subject to use conditions.	These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerant (<i>i.e.</i>, none of these substitutes may be used as a conversion or “retrofit” refrigerant for existing equipment designed for other refrigerants). These refrigerants may be used in remote condensing units and supermarket systems if and only if such equipment meets requirements listed in ASHRAE 15–2022.^{1,4,5} In cases where this listing includes requirements different than those of ASHRAE 15–2022, the appliance would need to meet the requirements of this listing 3 in place of requirements in the ASHRAE Standard. These refrigerants may only be used in refrigeration equipment that meets all requirements in UL 60335–2–89,^{1,2,3} except as provided otherwise in UL 60335–2–89, in ASHRAE 15–2022, or in this listing 3. In cases where this listing includes requirements more stringent than those of UL 60335–2–89, the appliance must meet the requirements of this listing 3 in place of the requirements in UL 60335–2–89. Where similar requirements of ASHRAE 15–2022 and UL 60335–2–89 differ, the more stringent or conservative condition shall apply unless superseded by this listing 3. The following markings must be attached at the locations provided and must be permanent:	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). It is the obligation of regulated entities to inform themselves of and comply with any other applicable legal obligations or restrictions. Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(a) On the outside of the equipment: "WARNING—Risk of Fire. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (b) On the outside of the equipment: "WARNING—Risk of Fire. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (c) On the inside of the equipment near the compressor: "WARNING—Risk of Fire. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting to Service This Product. All Safety Precautions Must be Followed." (d) For any equipment pre-charged at the factory, on the equipment packaging or on the outside of the equipment: "WARNING—Risk of Fire due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations" a. If the equipment is delivered packaged, this label shall be applied on the packaging. b. If the equipment is not delivered packaged, this label shall be applied on the outside of the equipment near the control panel or nameplate. (e) On the equipment near the nameplate: a. At the top of the marking: "Minimum Installation Height, X m (W ft)". This marking is only required if required by UL 60335–2–89. The terms "X" and "W" shall be replaced by the numeric height as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. b. Immediately below (a) above or at the top of the marking if (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²)". The terms "Y" and "Z" shall be replaced by the numeric area as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. (f) For non-fixed equipment, on the outside of the product: "WARNING—Risk of Fire or Explosion—Store in a well-ventilated room without continuously operating flames or other potential ignition."	Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex 101.DVT of UL 260355–2–89.^{1 2 3} CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration. Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from retail food refrigeration appliances are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

(g) For fixed equipment that is ducted, near the nameplate: "WARNING—Risk of Fire—Auxiliary devices which may be ignition sources shall not be installed in the ductwork, other than auxiliary devices listed for use with the specific appliance. See instructions."

(h) All of these markings must be in letters no less than 6.4 mm ($\frac{1}{4}$ inch) high.

The equipment must have red Pantone® Matching System #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25 mm) in both directions from such locations and shall be replaced if removed.

In addition to or instead of the markings described in Clause 7.6DV D1 of UL 60335–2–89, the equipment may display the GHS warning symbol for hazard category 1 flammable gases (black flame on a white background in a diamond with equal length sides with a red border), as defined in Chapter 2.2, Flammable Gases, and Annex 1, Classification and Labelling Summary Tables, of ST/SG/AC.10/30/Rev.9, Global Harmonized System (GHS) of Classification and Labelling of Chemicals, Ninth revised edition,¹⁸⁹ on the following three locations:

- Outside of the equipment (label (a));
- on the appliance packaging for a factory-charged unit or adjacent to the control panel or nameplate of a unit charged in place (label (d)); and
- in a location visible when accessing a service port and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes) (service label)

The perpendicular height of the diamond containing the GHS warning symbol for hazard category 1 flammable gases shall be at least 15 mm ($\frac{9}{16}$ in). In addition, next to the GHS warning symbol for hazard category 1 flammable gases must be text of the refrigerant safety class of the refrigerant according to ASHRAE 34–2022,¹⁴⁶⁷ in letters at least one-third the height of the diamond symbol.

The substitute R–454A may only be used in equipment with a refrigerant charge capacity less than 200 pounds, or in the high-temperature side of a cascade system.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
4. Commercial Ice Machines (New only).	HFO-1234yf, R-454C, R-455A, R-457A, and R-516A.	Acceptable subject to use conditions.	These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerant (<i>i.e.</i>, none of these substitutes may be used as a conversion or "retrofit" refrigerant for existing equipment designed for other refrigerants). These refrigerants may be used in new commercial ice machines if and only if such equipment meets requirements listed in ASHRAE 15-2022.^{1,4,5} In cases where this listing includes requirements different than those of ASHRAE 15-2022, the appliance would need to meet the requirements of this listing 4 in place of the requirements in ASHRAE 15-2022. These refrigerants may only be used in refrigeration equipment that meets all requirements in UL 60335-2-89,^{1,2,3} except as provided otherwise in UL 60335-2-89, in ASHRAE 15-2022, or in this listing 4. In cases where this listing includes requirements more stringent than those of UL 60335-2-89, the appliance must meet the requirements of this listing 4 in place of the requirements in UL 60335-2-89. Where similar requirements of ASHRAE 15-2022 and UL 60335-2-89 differ, the more stringent or conservative condition shall apply unless superseded by this listing 4. condition shall apply unless superseded by this listing 4. The following markings must be attached at the locations provided and must be permanent:	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). It is the obligation of regulated entities to inform themselves of and comply with any other applicable legal obligations or restrictions. Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby. Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants.

- (a) On the outside of the equipment: "WARNING—Risk of Fire. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing."
 - (b) On the outside of the equipment: "WARNING—Risk of Fire. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used."
 - (c) On the inside of the equipment near the compressor: "WARNING—Risk of Fire. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting to Service This Product. All Safety Precautions Must be Followed."
 - (d) For any equipment pre-charged at the factory, on the equipment packaging or on the outside of the equipment: "WARNING—Risk of Fire due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations"
-
- a. If the equipment is delivered packaged, this label shall be applied on the packaging.
 - b. If the equipment is not delivered packaged, this label shall be applied on the outside of the equipment near the control panel or nameplate.
 - (e) On the equipment near the nameplate:
 - a. At the top of the marking: "Minimum Installation Height, X m (W ft)". This marking is only required if required by UL 60335–2–89. The terms "X" and "W" shall be replaced by the numeric height as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.
 - b. Immediately below (a) above or at the top of the marking if (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²)". The terms "Y" and "Z" shall be replaced by the numeric area as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.

Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely.

Room occupants should evacuate the space immediately following the accidental release of this refrigerant.

Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex 101.DVT of UL 260355–2–89.^{1 2 3}

CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration.

Department of Transportation requirements for transport of flammable gases must be followed.

Flammable refrigerants being recovered or otherwise disposed of from commercial ice machine appliances are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(f) For non-fixed equipment, on the outside of the product: "WARNING—Risk of Fire or Explosion—Store in a well-ventilated room without continuously operating flames or other potential ignition." (g) For fixed equipment that is ducted, near the nameplate: "WARNING—Risk of Fire—Auxiliary devices which may be ignition sources shall not be installed in the ductwork, other than auxiliary devices listed for use with the specific appliance. See instructions." (h) All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The equipment must have red Pantone® Matching System #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25mm) in both directions from such locations and shall be replaced if removed. In addition to or instead of the markings described in Clause 7.6DV D1 of UL 60335-2-89, the equipment may display the GHS warning symbol for hazard category 1 flammable gases (black flame on a white background in a diamond with equal length sides with a red border), as defined in Chapter 2.2, Flammable Gasses, and Annex 1, Classification and Labelling Summary Tables, of ST/SG/AC.10/30/Rev.9, Global Harmonized System (GHS) of Classification and Labelling of Chemicals, Ninth revised edition,¹⁸⁹ on the following three locations: • Outside of the equipment (label (a)); • on the appliance packaging for a factory-charged unit or adjacent to the control panel or nameplate of a unit charged in place (label (d)); and • in a location visible when accessing a service port and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes) (service label).	

5. Commercial Ice Machines (New only)—as of 7/15/2024, for commercial ice machines with a remote compressor, for batch-type self-contained automatic commercial ice machines with a harvest rate above 1,000 lb ice per 24 hours and for continuous type self-contained automatic commercial ice machines with a harvest rate above 1,200 lb ice per 24 hours; for other types, as of [date reserved].	HFC-32, R-454A, R-454B.	Acceptable subject to use conditions.	The perpendicular height of the diamond containing the GHS warning symbol for hazard category 1 flammable gases shall be at least 15 mm ($\frac{9}{16}$ in). In addition, next to the GHS warning symbol for hazard category 1 flammable gases must be text of the refrigerant safety class of the refrigerant according to ASHRAE 34-2022,^{1 4 6 7} in letters at least one-third the height of the diamond symbol. These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerant (<i>i.e.</i>, none of these substitutes may be used as a conversion or "retrofit" refrigerant for existing equipment designed for other refrigerants). These refrigerants may be used in new commercial ice machines if and only if such equipment meets requirements in ASHRAE 15-2022.^{1 4 5} In cases where this listing includes requirements different than those of ASHRAE 15-2022, the appliance would need to meet the requirements of this listing 5 in place of the requirements in ASHRAE 15-2022. These refrigerants may only be used in refrigeration equipment that meets all requirements in UL 60335-2-89,^{1 2 3} except as provided otherwise in UL 60335-2-89, in ASHRAE 15-2022, or in this listing 5. In cases where this listing includes requirements more stringent than those of UL 60335-2-89, the appliance must meet the requirements of this listing 5 in place of the requirements in UL 60335-2-89. Where similar requirements of ASHRAE 15-2022 and UL 60335-2-89 differ, the more stringent or conservative condition shall apply unless superseded by this listing 5. The following markings must be attached at the locations provided and must be permanent:	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). It is the obligation of regulated entities to inform themselves of and comply with any other applicable legal obligations or restrictions. Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(a) On the outside of the equipment: "WARNING—Risk of Fire. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (b) On the outside of the equipment: "WARNING—Risk of Fire. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (c) On the inside of the equipment near the compressor: "WARNING—Risk of Fire. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting to Service This Product. All Safety Precautions Must be Followed." (d) For any equipment pre-charged at the factory, on the equipment packaging or on the outside of the equipment: "WARNING—Risk of Fire due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations" a. If the equipment is delivered packaged, this label shall be applied on the packaging. b. If the equipment is not delivered packaged, this label shall be applied on the outside of the equipment near the control panel or nameplate. (e) On the equipment near the nameplate: a. At the top of the marking: "Minimum Installation Height, X m (W ft)". This marking is only required if required by UL 60335-2-89. The terms "X" and "W" shall be replaced by the numeric height as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. b. Immediately below (a) above or at the top of the marking if (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²)". The terms "Y" and "Z" shall be replaced by the numeric area as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. (f) For non-fixed equipment, on the outside of the product: "WARNING—Risk of Fire or Explosion—Store in a well-ventilated room without continuously operating flames or other potential ignition."	Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex 101.DVT of UL 260355-2-89.^{1 2 3} CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration. Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from commercial ice machine appliances are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

(g) For fixed equipment that is ducted, near the nameplate: "WARNING—Risk of Fire—Auxiliary devices which may be ignition sources shall not be installed in the ductwork, other than auxiliary devices listed for use with the specific appliance. See instructions."

(h) All of these markings must be in letters no less than 6.4 mm ($\frac{1}{4}$ inch) high.

The equipment must have red Pantone® Matching System #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25mm) in both directions from such locations and shall be replaced if removed.

In addition to or instead of the markings described in Clause 7.6DV D1 of UL 60335–2–89, the equipment may display the GHS warning symbol for hazard category 1 flammable gases (black flame on a white background in a diamond with equal length sides with a red border), as defined in Chapter 2.2, Flammable Gasses, and Annex 1, Classification and Labelling Summary Tables, of ST/SG/AC.10/30/Rev.9, Global Harmonized System (GHS) of Classification and Labelling of Chemicals, Ninth revised edition^{1 8 9} on the following three locations:

- Outside of the equipment (label (a));
- on the appliance packaging for a factory-charged unit or adjacent to the control panel or nameplate of a unit charged in place (label (d)); and
- in a location visible when accessing a service port and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes) (service label).

The perpendicular height of the diamond containing the GHS warning symbol for hazard category 1 flammable gases shall be at least 15 mm ($\frac{9}{16}$ in). In addition, next to the GHS warning symbol for hazard category 1 flammable gases must be text of the refrigerant safety class of the refrigerant according to ASHRAE 34–2022,^{1 4 6 7} in letters at least one-third the height of the diamond symbol.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
6. Industrial Process Refrigeration (New only).	HFC-32, HFO-1234yf, HFO-1234ze(E), R-454A, R-454B, R-454C, R-455A, R-457A, and R-516A.	Acceptable subject to use conditions.	These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerant (<i>i.e.</i>, none of these substitutes may be used as a conversion or "retrofit" refrigerant for existing equipment designed for other refrigerants). These refrigerants may be used in industrial process refrigeration equipment if and only if such equipment meets requirements in ASHRAE 15-2022.^{1 4 5} In cases where this listing includes requirements different than those of ASHRAE 15-2022, the appliance would need to meet the requirements of this listing 6 in place of the requirements in ASHRAE 15-2022. These refrigerants may only be used in refrigeration equipment that meets all requirements in UL 60335-2-89,^{1 2 3} except as provided otherwise in UL 60335-2-89, in ASHRAE 15-2022, or in this listing 6. In cases where this listing includes requirements more stringent than those of UL 60335-2-89, the appliance must meet the requirements of this listing 6 in place of the requirements in UL 60335-2-89. Where similar requirements of ASHRAE 15-2022 and UL 60335-2-89 differ, the more stringent or conservative condition shall apply unless superseded by this listing 6.	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby.

The following markings must be attached at the locations provided and must be permanent:

- (a) On the outside of the equipment: "WARNING—Risk of Fire. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing."
- (b) On the outside of the equipment: "WARNING—Risk of Fire. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used."
- (c) On the inside of the equipment near the compressor: "WARNING—Risk of Fire. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting to Service This Product. All Safety Precautions Must be Followed."
- (d) For any equipment pre-charged at the factory, on the equipment packaging or on the outside of the equipment: "WARNING—Risk of Fire due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations"
 - a. If the equipment is delivered packaged, this label shall be applied on the packaging.
 - b. If the equipment is not delivered packaged, this label shall be applied on the outside of the equipment near the control panel or nameplate.
- (e) On the equipment near the nameplate:
 - a. At the top of the marking: "Minimum Installation Height, X m (W ft)". This marking is only required if required by UL 60335–2–89. The terms "X" and "W" shall be replaced by the numeric height as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.
 - b. Immediately below (a) above or at the top of the marking if (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²)". The terms "Y" and "Z" shall be replaced by the numeric area as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.
- (f) For non-fixed equipment, on the outside of the product: "WARNING—Risk of Fire or Explosion—Store in a well-ventilated room without continuously operating flames or other potential ignition."

Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants.

Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely.

Room occupants should evacuate the space immediately following the accidental release of this refrigerant.

Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex 101.DVT of UL 260355–2–89.^{1 2 3}

CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration.

Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from industrial process refrigeration appliances are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(g) For fixed equipment that is ducted, near the nameplate: "WARNING—Risk of Fire—Auxiliary devices which may be ignition sources shall not be installed in the ductwork, other than auxiliary devices listed for use with the specific appliance. See instructions." (h) All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The equipment must have red Pantone® Matching System #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25mm) in both directions from such locations and shall be replaced if removed. In addition to or instead of the markings described in Clause 7.6DV D1 of UL 60335–2–89, the equipment may display the GHS warning symbol for hazard category 1 flammable gases (black flame on a white background in a diamond with equal length sides with a red border), as defined in Chapter 2.2, Flammable Gasses, and Annex 1, Classification and Labelling Summary Tables, of ST/SG/AC.10/30/Rev.9, Global Harmonized System (GHS) of Classification and Labelling of Chemicals, Ninth revised edition,¹⁸⁹ on the following three locations: • Outside of the equipment (label (a)); • on the appliance packaging for a factory-charged unit or adjacent to the control panel or nameplate of a unit charged in place (label (d)); and • in a location visible when accessing a service port and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes) (service label). The perpendicular height of the diamond containing the GHS warning symbol for hazard category 1 flammable gases shall be at least 15 mm (¾ in). In addition, next to the GHS warning symbol for hazard category 1 flammable gases must be text of the refrigerant safety class of the refrigerant according to ASHRAE 34–2022,¹⁴⁶⁷ in letters at least one-third the height of the diamond symbol.	

7. Cold Storage Warehouses (New only).	HFO-1234yf, HFO-1234ze(E), R-454A, R-454C, R-455A, R-457A, and R-516A.	Acceptable subject to use conditions.	The substitute R-454A may only be used in chillers for industrial process refrigeration, in equipment with the refrigerant temperature entering the evaporator less than or equal to -30°C, in equipment with a refrigerant charge capacity less than 200 pounds and with the refrigerant temperature entering the evaporator higher than -30°C, and in the high-temperature side of a cascade system with the refrigerant temperature entering the evaporator higher than -30°C. The substitutes HFC-32 and R-454B may only be used in chillers for industrial process refrigeration, or in equipment with the refrigerant temperature entering the evaporator less than or equal to -30°C. These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerant (<i>i.e.</i>, none of these substitutes may be used as a conversion or "retrofit" refrigerant for existing equipment designed for other refrigerants). These refrigerants may be used in cold storage warehouses if and only if such equipment meets requirements in ASHRAE 15-2022.^{1,4,5} In cases where this listing includes requirements different than those of ASHRAE 15-2022, the appliance would need to meet the requirements of this listing 7 in place of the requirements in ASHRAE 15-2022. These refrigerants may only be used in refrigeration equipment that meets all requirements in UL 60335-2-89,^{1,2,3} except as provided otherwise in UL 60335-2-89, in ASHRAE 15-2022, or in this listing 7. In cases where this listing includes requirements more stringent than those of UL 60335-2-89, the appliance must meet the requirements of this listing 7 in place of the requirements in UL 60335-2-89. Where similar requirements of ASHRAE 15-2022 and UL 60335-2-89 differ, the more stringent or conservative condition shall apply unless superseded by this listing 7.	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			The following markings must be attached at the locations provided and must be permanent: (a) On the outside of the equipment: "WARNING—Risk of Fire. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing." (b) On the outside of the equipment: "WARNING—Risk of Fire. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used." (c) On the inside of the equipment near the compressor: "WARNING—Risk of Fire. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting to Service This Product. All Safety Precautions Must be Followed." (d) For any equipment pre-charged at the factory, on the equipment packaging or on the outside of the equipment: "WARNING—Risk of Fire due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations" a. If the equipment is delivered packaged, this label shall be applied on the packaging. b. If the equipment is not delivered packaged, this label shall be applied on the outside of the equipment near the control panel or nameplate.	Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants. Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely. Room occupants should evacuate the space immediately following the accidental release of this refrigerant. Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex 101.DVT of UL 260355-2-89.^{1 2 3} CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration. Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from cold storage warehouses are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

- (e) On the equipment near the nameplate:
 - a. At the top of the marking: "Minimum Installation Height, X m (W ft)". This marking is only required if required by UL 60335–2–89. The terms "X" and "W" shall be replaced by the numeric height as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.
 - b. Immediately below (a) above or at the top of the marking if (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²)". The terms "Y" and "Z" shall be replaced by the numeric area as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis.
- (f) For non-fixed equipment, on the outside of the product: "WARNING—Risk of Fire or Explosion—Store in a well-ventilated room without continuously operating flames or other potential ignition."
- (g) For fixed equipment that is ducted, near the nameplate: "WARNING—Risk of Fire—Auxiliary devices which may be ignition sources shall not be installed in the ductwork, other than auxiliary devices listed for use with the specific appliance. See instructions."
- (h) All of these markings must be in letters no less than 6.4 mm (¼ inch) high.

The equipment must have red Pantone® Matching System #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25mm) in both directions from such locations and shall be replaced if removed.

In addition to or instead of the markings described in Clause 7.6DV D1 of UL 60335–2–89, the equipment may display the GHS warning symbol for hazard category 1 flammable gases (black flame on a white background in a diamond with equal length sides with a red border), as defined in Chapter 2.2, Flammable Gases, and Annex 1, Classification and Labelling Summary Tables, of ST/SG/AC.10/30/Rev.9, Global Harmonized System (GHS) of Classification and Labelling of Chemicals, Ninth revised edition,¹⁸⁹ on the following three locations:

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
8. Ice Skating Rinks (New only; Equipment with remote compressors).	HFO-1234yf, HFO-1234ze(E), R-454C, R-455A, R-457A, and R-516A.	Acceptable subject to use conditions.	• Outside of the equipment (label (a)); • on the appliance packaging for a factory-charged unit or adjacent to the control panel or nameplate of a unit charged in place (label (d)); and • in a location visible when accessing a service port and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes) (service label). The perpendicular height of the diamond containing the GHS warning symbol for hazard category 1 flammable gases shall be at least 15 mm ($\frac{3}{16}$ in). In addition, next to the GHS warning symbol for hazard category 1 flammable gases must be text of the refrigerant safety class of the refrigerant to ASHRAE 34-2022,^{14 67} in letters at least one-third the height of the diamond symbol. The substitute R-454A may only be used either in equipment with a refrigerant charge capacity less than 200 pounds or in the high-temperature side of a cascade system. These refrigerants may be used only in new equipment specifically designed and clearly identified for the refrigerant (<i>i.e.</i>, none of these substitutes may be used as a conversion or “retrofit” refrigerant for existing equipment designed for other refrigerants). These refrigerants may be used in ice skating rinks with remote compressors if and only if such equipment meets requirements in ASHRAE 15-2022.^{14 5} In cases where this listing includes requirements different than those of ASHRAE 15-2022, the appliance would need to meet the requirements of this listing 8 in place of the requirements in ASHRAE 15-2022. These refrigerants may only be used in refrigeration equipment that meets all requirements in UL 60335-2-89,^{12 3} except as provided otherwise in UL 60335-2-89, in ASHRAE 15-2022, or in this listing 8. In cases where this listing includes requirements more stringent than those of UL 60335-2-89, the appliance must meet the requirements of this listing 8 in place of the requirements in UL 60335-2-89. Where similar requirements of ASHRAE 15-2022 and UL 60335-2-89 differ, the more stringent or conservative condition shall apply unless superseded by this listing 8.	Applicable OSHA requirements at 29 CFR part 1910 must be followed, including those at 29 CFR 1910.94 (ventilation) and 1910.106 (flammable and combustible liquids), 1910.110 (storage and handling of liquefied petroleum gases), and 1910.1000 (toxic and hazardous substances). Proper ventilation should be maintained at all times during the manufacture and storage of equipment containing flammable refrigerants through adherence to good manufacturing practices as per 29 CFR 1910.106. If refrigerant levels in the air surrounding the equipment rise above one-fourth of the lower flammability limit, the space should be evacuated, and reentry should occur only after the space has been properly ventilated. Technicians and equipment manufacturers should wear appropriate personal protective equipment, including chemical goggles and protective gloves, when handling flammable refrigerants. Special care should be taken to avoid contact with the skin which, like many refrigerants, can cause freeze burns on the skin. A class B dry powder type fire extinguisher should be kept nearby.

Technicians should only use spark-proof tools when working on air conditioning equipment with flammable refrigerants.

Any recovery equipment used should be designed for flammable refrigerants. Only technicians specifically trained in handling flammable refrigerants should service refrigeration equipment containing this refrigerant. Technicians should gain an understanding of minimizing the risk of fire and the steps to use flammable refrigerants safely.

Room occupants should evacuate the space immediately following the accidental release of this refrigerant.

Personnel commissioning, maintaining, repairing, decommissioning and disposing of appliances with this refrigerant should obtain training and follow practices consistent with Annex 101.DVT of UL 260355–2–89.^{2,3}

CAA section 608(c)(2) prohibits knowingly venting or otherwise knowingly releasing or disposing of substitute refrigerants in the course of maintaining, servicing, repairing or disposing of an appliance or industrial process refrigeration.

Department of Transportation requirements for transport of flammable gases must be followed. Flammable refrigerants being recovered or otherwise disposed of from ice skating rinks are likely to be hazardous waste under the Resource Conservation and Recovery Act (RCRA) (see 40 CFR parts 260 through 270).

The following markings must be attached at the locations provided and must be permanent:

(a) On the outside of the equipment: "WARNING—Risk of Fire. Flammable Refrigerant Used. To Be Repaired Only By Trained Service Personnel. Do Not Puncture Refrigerant Tubing."

(b) On the outside of the equipment: "WARNING—Risk of Fire. Dispose of Properly In Accordance With Federal Or Local Regulations. Flammable Refrigerant Used."

(c) On the inside of the equipment near the compressor: "WARNING—Risk of Fire. Flammable Refrigerant Used. Consult Repair Manual/Owner's Guide Before Attempting to Service This Product. All Safety Precautions Must be Followed."

(d) For any equipment pre-charged at the factory, on the equipment packaging or on the outside of the equipment: "WARNING—Risk of Fire due to Flammable Refrigerant Used. Follow Handling Instructions Carefully in Compliance with National Regulations"

a. If the equipment is delivered packaged, this label shall be applied on the packaging.

b. If the equipment is not delivered packaged, this label shall be applied on the outside of the equipment near the control panel or nameplate.

REFRIGERANTS—ACCEPTABLE SUBJECT TO USE CONDITIONS—Continued

End-use	Substitute	Decision	Use conditions	Further information
			(e) On the equipment near the nameplate: a. At the top of the marking: "Minimum Installation Height, X m (W ft)". This marking is only required if required by UL 60335-2-89. The terms "X" and "W" shall be replaced by the numeric height as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the height in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. b. Immediately below (a) above or at the top of the marking if (a) is not required: "Minimum room area (operating or storage), Y m² (Z ft²)". The terms "Y" and "Z" shall be replaced by the numeric area as calculated per the UL Standard. Note that the formatting here is slightly different than the UL Standard; specifically, the area in Inch-Pound units is placed in parentheses and the word "and" has been replaced by the opening parenthesis. (f) For non-fixed equipment, on the outside of the product: "WARNING—Risk of Fire or Explosion—Store in a well-ventilated room without continuously operating flames or other potential ignition." (g) For fixed equipment that is ducted, near the nameplate: "WARNING—Risk of Fire—Auxiliary devices which may be ignition sources shall not be installed in the ductwork, other than auxiliary devices listed for use with the specific appliance. See instructions." (h) All of these markings must be in letters no less than 6.4 mm (¼ inch) high. The equipment must have red Pantone® Matching System #185 or RAL 3020 marked service ports, pipes, hoses, or other devices through which the refrigerant passes, to indicate the use of a flammable refrigerant. This color must be applied at all service ports and other parts of the system where service puncturing or other actions creating an opening from the refrigerant circuit to the atmosphere might be expected and must extend a minimum of one (1) inch (25mm) in both directions from such locations and shall be replaced if removed.	

		In addition to or instead of the markings described in Clause 7.6DV D1 of UL 60335–2–89, the equipment may display the Globally Harmonized System of Classification and Labelling of Chemicals (GHS) warning symbol for hazard category 1 flammable gases^{1 7 8} (black flame on a white background in a diamond with equal length sides with a red border) on the following three locations: • outside of the equipment (label (a)); • on the appliance packaging for a factory-charged unit or adjacent to the control panel or nameplate of a unit charged in place (label (d)); and • in a location visible when accessing a service port and where service puncturing or otherwise creating an opening from the refrigerant circuit to the atmosphere might be expected (e.g., process tubes) (service label). The perpendicular height of the diamond containing the GHS warning symbol for hazard category 1 flammable gases shall be at least 15 mm ($\frac{9}{16}$ in). In addition, next to the GHS warning symbol for hazard category 1 flammable gases must be text of the refrigerant safety class of the refrigerant according to ASHRAE 34–2022,^{1 4 6 7} in letters at least one-third the height of the diamond symbol.	

¹The Director of the Federal Register approves this incorporation by reference (5 U.S.C. 552(a) and 1 CFR part 51). You may inspect a copy at the U.S. EPA or at the National Archives and Records Administration (NARA). Contact the U.S. EPA at: EPA Docket Center, WJC West Building, Room 3334, 1301 Constitution Avenue NW, Washington, DC 20004, www.epa.gov/dockets; (202) 202–1744. For information on the availability of this material at NARA, visit www.archives.gov/federal-register/cfr/ibr-locations or email fr.inspection@nara.gov.

²You may obtain the UL material from: Underwriters Laboratories Inc. (UL) COMM 2000; 151 Eastern Avenue; Bensenville, IL 60106; phone: 1–888–853–3503 in the U.S. or Canada (other countries +1–415–352–2168); email: orders@shopulstandards.com; website: <https://ulstandards.ul.com> or www.shopulstandards.com.

³UL 60335–2–89, Standard for Safety for Household and Similar Electrical Appliances—Safety—Part 2–89: Particular Requirements for Commercial Refrigerating Appliances, 2nd edition, dated October 27, 2021.

⁴You may obtain the ANSI/ASHRAE material from: American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE), 180 Technology Parkway NW, Peachtree Corners, Georgia 30092; phone: 1–800–527–4723 or 1–404–636–8400 in the U.S. or Canada; email: cservice@ashrae.org; website: <https://www.ashrae.org/technical-resources/bookstore/ashrae-refrigeration-resources>.

⁵ANSI/ASHRAE Standard 15–2022. Safety Standard for Refrigeration Systems, copyright 2022.

⁶ANSI/ASHRAE Standard 34–2022. Designation and Safety Classification of Refrigerants, copyright 2022.

⁷ANSI/ASHRAE Addendum a to ANSI/ASHRAE Standard 34–2022, Designation and Safety Classification of Refrigerants, ANSI/ASHRAE-approved December 20, 2022.

⁸You may obtain the UN material from the United Nations Publications section at: <https://shop.un.org/books/global-harmon-syst-class-9-92280>; by mail: United Nations Publications Customer Service, P.O. Box 960, Herndon, VA 20172; phone: 1–703–661–1571; email: order@un.org.

⁹ST/SG/AC.10/30/Rev.9, Global Harmonized System (GHS) of Classification and Labelling of Chemicals, Ninth revised edition, copyright 2021; Chapter 2.2, Flammable Gasses, and Annex 1, Classification and Labelling Summary Tables.

[89 FR 50479, June 13, 2024]

EFFECTIVE DATE NOTE: At 89 FR 50479, June 13, 2024, appendix Y to subpart G of part 82 was added, effective July 15, 2024.

Subpart H—Halon Emissions Reduction

SOURCE: 63 FR 11096, Mar. 5, 1998, unless otherwise noted.

§ 82.250 Purpose and scope.

(a) The purpose of this subpart is to reduce the emissions of halon in accordance with section 608 of the Clean Air Act by banning the manufacture of halon blends; banning the intentional release of halons during repair, testing, and disposal of equipment containing halons and during technician training; requiring organizations that employ technicians to provide emissions reduction training; and requiring proper disposal of halons and equipment containing halons.

(b) This subpart applies to any person testing, servicing, maintaining, repairing or disposing of equipment that contains halons or using such equipment during technician training. This subpart also applies to any person disposing of halons; to manufacturers of halon blends; and to organizations that employ technicians who service halon-containing equipment.

§ 82.260 Definitions.

Halon-containing equipment means equipment used to store, transfer, and/or disperse halon.

Disposal of halon means the process leading to and including discarding of halon from halon-containing equipment.

Disposal of halon-containing equipment means the process leading to and including:

(1) The discharge, deposit, dumping or placing of any discarded halon-containing equipment into or on any land or water;

(2) The disassembly of any halon-containing equipment for discharge, deposit, or dumping or placing of its discarded component parts into or on any land or water; or

(3) The disassembly of any halon-containing equipment for reuse of its component parts.

Halon means any of the Class I, Group II substances listed in subpart A, appendix A of 40 CFR part 82. This group consists of the three halogenated hydrocarbons known as Halon 1211,

Halon 1301, and Halon 2402, and all isomers of these chemicals.

Halon product means any mixture or combination of substances that contains only one halon (e.g., Halon 1301 plus dinitrogen gas (N₂))

Halon blend means any mixture or combination of substances that contains two or more halons.

Manufacturer means any person engaged in the direct manufacture of halon, halon blends or halon-containing equipment.

Person means any individual or legal entity, including an individual, corporation, partnership, association, state, municipality, political subdivision of a state, Indian tribe, and any agency, department, or instrumentality of the United States, and any officer, agent, or employee thereof.

Technician means any person who performs testing, maintenance, service, or repair that could reasonably be expected to release halons from equipment into the atmosphere. Technician also means any person who performs disposal of equipment that could reasonably be expected to release halons from the equipment into the atmosphere. Technician includes but is not limited to installers, contractor employees, in-house service personnel, and in some cases, owners.

§ 82.270 Prohibitions.

(a) Effective April 6, 1998 no person may newly manufacture any halon blend. Halon blends manufactured solely for the purpose of aviation fire protection are not subject to this prohibition, provided that:

(1) The manufacturer or its designee is capable of recycling the blend to the relevant industry standards for the chemical purity of each individual halon;

(2) The manufacturer includes in all sales contracts for blends produced by it on or after April 6, 1998 the provision that the blend must be returned to it or its designee for recycling; and

(3) The manufacturer or its designee in fact recycles blends produced by the manufacturer on or after April 6, 1998 and returned to it for recycling to the relevant industry standards for the chemical purity of each individual halon.

Environmental Protection Agency

§ 82.300

(b) Effective April 6, 1998, no person testing, maintaining, servicing, repairing, or disposing of halon-containing equipment or using such equipment for technician training may knowingly vent or otherwise release into the environment any halons used in such equipment.

(1) De minimis releases associated with good faith attempts to recycle or recover halon are not subject to this prohibition.

(2) Release of residual halon contained in fully discharged total flooding fire extinguishing systems would be considered a *de minimis* release associated with good faith attempts to recycle or recover halon.

(3) Release of halons during testing of fire extinguishing systems is not subject to this prohibition if the following four conditions are met:

(i) Systems or equipment employing suitable alternative fire extinguishing agents are not available;

(ii) System or equipment testing requiring release of extinguishing agent is essential to demonstrate system or equipment functionality;

(iii) Failure of the system or equipment would pose great risk to human safety or the environment; and

(iv) A simulant agent cannot be used in place of the halon during system or equipment testing for technical reasons.

(4) Releases of halons associated with research and development of halon alternatives, and releases of halons necessary during analytical determination of halon purity using established laboratory practices are exempt from this prohibition.

(5) This prohibition does not apply to qualification and development testing during the design and development process of halon-containing systems or equipment when such tests are essential to demonstrate system or equipment functionality and when a suitable simulant agent can not be used in place of the halon for technical reasons.

(6) This prohibition does not apply to the emergency release of halons for the legitimate purpose of fire extinguishing, explosion inertion, or other emergency applications for which the equipment or systems were designed.

(c) Effective April 6, 1998, organizations that employ technicians who test, maintain, service, repair or dispose of halon-containing equipment shall take appropriate steps to ensure that technicians hired on or before April 6, 1998 will be trained regarding halon emissions reduction by September 1, 1998. Technicians hired after April 6, 1998 shall be trained regarding halon emissions reduction within 30 days of hiring, or by September 1, 1998, whichever is later.

(d) Effective April 6, 1998, no person shall dispose of halon-containing equipment except by sending it for halon recovery to a manufacturer operating in accordance with NFPA 10 and NFPA 12A standards, a fire equipment dealer operating in accordance with NFPA 10 and NFPA 12A standards or a recycler operating in accordance with NFPA 10 and NFPA 12A standards. This provision does not apply to ancillary system devices such as electrical detection control components which are not necessary to the safe and secure containment of the halon within the equipment, to fully discharged total flooding systems, or to equipment containing only de minimis quantities of halons.

(e) No person shall dispose of halon except by sending it for recycling to a recycler operating in accordance with NFPA 10 and NFPA 12A standards, or by arranging for its destruction using one of the controlled processes approved by the Parties and listed in the definition of *destruction* in § 82.3.

(f) Effective April 6, 1998, no owner of halon-containing equipment shall allow halon release to occur as a result of failure to maintain such equipment.

[63 FR 11096, Mar. 5, 1998, as amended at 85 FR 15301, Mar. 17, 2020]

Subpart I—Ban on Refrigeration and Air-Conditioning Appliances Containing HCFCs

SOURCE: 74 FR 66467, Dec. 15, 2009, unless otherwise noted.

§ 82.300 Purpose.

The purpose of this subpart is to protect stratospheric ozone by restricting

§ 82.302

40 CFR Ch. I (7–1–24 Edition)

the sale and distribution of HCFC containing appliances under authority of section 615 of the Clean Air Act as amended in 1990.

§ 82.302 Definitions.

As used in this subpart, the term:

Appliance means any device which contains and uses a refrigerant and which is used for household or commercial purposes, including any air conditioner, refrigerator, chiller, or freezer.

Class I substance means any controlled substance designated as class I in 40 CFR part 82, appendix A to subpart A.

Class II substance means any controlled substance designated as class II in 40 CFR part 82, appendix B to subpart A.

Consumer, when used to describe a person taking action with regard to a product, means the ultimate purchaser, recipient or user of a product.

Distributor, when used to describe a person taking action with regard to a product, means:

(1) The seller of a product to a consumer or another distributor; or

(2) A person who sells or distributes that product in interstate commerce, including sale or distribution preceding export from, or following import to, the United States.

Hydrochlorofluorocarbon means any substance listed as class II in 40 CFR part 82, appendix B to subpart A.

Manufactured, for an appliance, means the date on which the appliance's refrigerant circuit is complete, the appliance can function, the appliance holds a refrigerant charge, and the appliance is ready for use for its intended purposes; for a pre-charged appliance component, "manufactured" means the date that the original equipment manufacturer has physically completed assembly of the component, the component is charged with refrigerant, and the component is ready for initial sale or distribution.

Person means any individual or legal entity, including an individual, corporation, partnership, association, State, municipality, political subdivision of a State, Indian tribe; any agency, department, or instrumentality of the United States; and any officer, agent, or employee thereof.

Pre-charged appliance means any appliance charged with refrigerant prior to sale or distribution, or offer for sale or distribution in interstate commerce.

Pre-charged appliance component means any portion of an appliance including but not limited to condensers, compressors, line sets, and coils that is charged with refrigerant prior to sale or distribution or offer for sale or distribution in interstate commerce.

Product means an item or category of items manufactured from raw or recycled materials which is used to perform a function or task.

Refrigerant means, for purposes of this subpart, any substance consisting in part or whole of a class I or class II ozone-depleting substance that is used for heat transfer purposes and provides a cooling effect.

§ 82.304 Prohibitions.

Effective January 1, 2010, no person may sell or distribute, or offer to sell or distribute, in interstate commerce any product identified in § 82.306.

§ 82.306 Prohibited products.

Effective January 1, 2010, the following products are subject to the prohibitions specified under § 82.304—

(a) Any pre-charged appliance manufactured on or after January 1, 2010 containing HCFC-22, HCFC-142b or a blend containing one or both of these controlled substances.

(b) Any pre-charged appliance component for air-conditioning or refrigeration appliances manufactured on or after January 1, 2010 containing HCFC-22, HCFC-142b, or a blend containing one or both of these controlled substances.

PART 83 [RESERVED]

PART 84—PHASEDOWN OF HYDROFLUOROCARBONS

Subpart A—Production and Consumption Controls

Sec.

84.1 Purpose and scope.

84.3 Definitions.

84.5 Prohibitions relating to regulated substances.

84.7 Phasedown schedule.

Environmental Protection Agency

§ 84.3

- 84.9 Allocation of calendar-year production allowances.
- 84.11 Allocation of calendar-year consumption allowances.
- 84.13 Allocation of application-specific allowances.
- 84.15 Set-aside of application-specific allowances, production allowances, and consumption allowances.
- 84.17 Availability of additional consumption allowances.
- 84.19 Transfers of allowances.
- 84.21 Sale or conveyance of regulated substances produced or imported with application-specific allowances.
- 84.23 Certification identification generation and tracking.
- 84.25 Required processes to import regulated substances as feedstocks or for destruction.
- 84.27 Controlling emissions of HFC-23.
- 84.29 Destruction of regulated substances.
- 84.31 Recordkeeping and reporting.
- 84.33 Auditing of recordkeeping and reporting.
- 84.35 Administrative consequences.
- 84.37 Incorporation by reference.

Subpart B—Restrictions on the Use of Hydrofluorocarbons

- 84.50 Purpose.
- 84.52 Definitions.
- 84.54 Restrictions on the use of hydrofluorocarbons.
- 84.56 Exemptions.
- 84.58 Labeling.
- 84.60 Reporting and recordkeeping.
- 84.62 Technology transitions petition requirements.
- 84.64 Global warming potentials.

APPENDIX A TO PART 84—REGULATED SUBSTANCES

AUTHORITY: Pub. L. 116-260, Division S, Sec. 103.

SOURCE: 86 FR 55201, Oct. 5, 2021, unless otherwise noted.

Subpart A—Production and Consumption Controls

§ 84.1 Purpose and scope.

(a) The purpose of the regulations in this subpart is to implement certain provisions of the American Innovation and Manufacturing Act of 2020 (AIM Act), enacted as part of Public Law 116-260. In particular, the AIM Act imposes limits on the production and consumption of certain regulated substances, according to a specified schedule, which are addressed by this subpart. (b) This subpart applies to any

person that produces, transforms, destroys, imports, exports, sells or distributes, offers for sale or distribution, recycles for fire suppression, or reclaims a regulated substance and to end users in the six applications listed in subsection (e)(4)(B)(iv) of the AIM Act.

[86 FR 55206, Oct. 5, 2021]

§ 84.3 Definitions.

As used in this subpart, the term:

Administrator means the Administrator of the United States Environmental Protection Agency or his or her authorized representative.

Allowance means a limited authorization for the production or consumption of a regulated substance established under subsection (e) of section 103 in Division S, Innovation for the Environment, of the Consolidated Appropriations Act, 2021 (Pub. L. 116-260) (the AIM Act). An allowance allocated under subsection (e) of section 103 in Division S of the AIM Act does not constitute a property right.

Application-specific allowance means a limited authorization granted in accordance with subsection (e)(4)(B)(iv) of the AIM Act for the production or import of a regulated substance for use in the specifically identified applications that are listed in that subsection and in accordance with the restrictions contained at § 84.5(c). An application-specific allowance does not constitute a property right.

Batch means a vessel, container, or cylinder from which a producer, importer, reclaimer, recycler, or repackager transfers regulated substances directly for sale or distribution, or for repackaging for sale or distribution; or a population of small vessels, containers, or cylinders with the same nominal composition that a producer, importer, reclaimer, recycler, or repackager directly offers for sale or distribution.

Berth means to moor a ship in its allotted place at a wharf or dock.

Bulk means a regulated substance of any amount that is in a container for the transportation or storage of that substance such as cylinders, drums, ISO tanks, and small cans. A regulated substance that must first be transferred from a container to another container, vessel, or piece of equipment in

order to realize its intended use is a bulk substance. A regulated substance contained in a manufactured product such as an appliance, an aerosol can, or a foam is not a bulk substance.

Certificate of analysis means a document that certifies the contents of an import meets the nominal composition following sampling and testing requirements prescribed in §84.5(i)(3) for the appropriate regulated substance or blend of regulated substances.

Chemical vapor deposition chamber cleaning means, in the context of semiconductor manufacturing, a process type in which chambers used for depositing thin films are cleaned periodically using plasma-generated fluorine atoms and other reactive fluorine-containing fragments.

Commonly owned: An entity that is related to another entity by a shared individual natural person(s), where either:

(1) There is at least a single individual that owns 30 percent or more of each entity; or

(2) Individuals that share a direct family relationship (parent, child, sibling, or spouse) own a majority of each entity.

Confer means to shift unexpended application-specific allowances obtained in accordance with subsection (e)(4)(B)(iv) of the AIM Act from the end user allocated such allowances to one or more entities in the supply chain for the production or import of a regulated substance for use by the end user.

Consumption, with respect to a regulated substance, means production plus imports minus exports.

Consumption allowances means a limited authorization to produce and import regulated substances; however, consumption allowances may be used to produce regulated substances only in conjunction with production allowances. A person's consumption allowances are the total of the allowances obtained under §84.11 or §84.15 as may be modified under §§84.17 (availability of additional consumption allowances), 84.19 (transfer of allowances), and 84.35 (administrative consequences).

Defense spray means an aerosol-based spray used for self-defense, including pepper spray and animal sprays, and

containing the irritant capsaicin and related capsaicinoids (derived from *oleoresin capsicum*), an emulsifier, and an aerosol propellant.

Destruction means the expiration of a regulated substance to the destruction and removal efficiency actually achieved. Such destruction might result in a commercially useful end product, but such usefulness would be secondary to the act of destruction.

Etching means, in the context of semiconductor manufacturing, a process type that uses plasma-generated fluorine atoms and other reactive fluorine-containing fragments that chemically react with exposed thin films (*e.g.*, dielectric, metals) or substrate (*e.g.*, silicon) to selectively remove portions of material. This includes semiconductor production processes using fluorinated GHG reagents to clean wafers.

Exchange value means the value assigned to a regulated substance in accordance with AIM Act subsections (c) and (e), as applicable, and as provided in appendix A to this part.

Exchange value equivalent (EVe) means the exchange value-weighted amount of a regulated substance obtained by multiplying the mass of a regulated substance by the exchange value of that substance.

Expend means to subtract the number of allowances required for the production or import of regulated substances under this part from a person's unexpended allowances.

Export means the transport from inside the United States or its territories to persons outside the United States or its territories, excluding United States military bases and ships for onboard use.

Exporter means the person who contracts to sell regulated substances for export or transfers regulated substances to his affiliate in another country.

Facility means one or more production lines at the same location owned by or under common control of the same person.

Final customer means the last person to purchase a bulk regulated substance before its intended use. Final customer includes, but is not limited to, air conditioning contractors in the residential

Environmental Protection Agency

§ 84.3

air conditioning market, foam systems houses, aerosol fillers, semiconductor manufacturers, air conditioning and refrigeration equipment manufacturers that ship equipment pre-charged, and fire extinguisher manufacturers.

Fire suppressant recycler means, generally, an entity that collects used HFC fire suppressants and directly resells those collected and aggregated HFCs—with or without any additional reprocessing—to another entity for reuse as a fire suppressant (also referred to as a “recycler for fire suppression” in this subpart). An entity that collects and aggregates used HFC fire suppressants for distribution to another entity for reprocessing before being sold for reuse as a fire suppressant would not be a fire suppressant recycler. An entity that resells HFC fire suppressants that have already been reprocessed for use as a fire suppressant by another entity would not be a fire suppressant recycler.

Foreign country means an entity that is recognized as a sovereign nation or country other than the United States of America.

Heel means the amount of a regulated substance that remains in a container after the container is discharged or offloaded (that is no more than 10 percent of the volume of the container).

Import means to land on, bring into, or introduce into, or attempt to land on, bring into, or introduce into, any place subject to the jurisdiction of the United States, regardless of whether that landing, bringing, or introduction constitutes an importation within the meaning of the customs laws of the United States. Offloading used regulated substances recovered from equipment aboard a marine vessel, aircraft, or other aerospace vehicle during servicing is not considered an import.

Importer means any person who imports a regulated substance into the United States. “Importer” includes the person primarily liable for the payment of any duties on the merchandise or an authorized agent acting on his or her behalf. The term also includes:

- (1) The consignee;
- (2) The importer of record;
- (3) The actual owner; or

(4) The transferee, if the right to draw merchandise in a bonded warehouse has been transferred.

Individual shipment means the kilograms of a regulated substance for which a person may make one (1) U.S. Customs entry, as identified in the non-objection notice obtained from the relevant Agency official in accordance with § 84.25.

Majority owned means when a corporate entity has at least a fifty percent stake in another entity.

Metered dose inhaler (MDI) means a handheld pressurized inhalation system that delivers small, precisely measured therapeutic doses of medication directly to the airways of a patient. MDIs treat health conditions such as asthma and chronic obstructive pulmonary disease and are approved for such use by the U.S. Food and Drug Administration (FDA).

Mission-critical military end uses means those uses of regulated substances by an agency of the Federal Government responsible for national defense that have a direct impact on mission capability, as determined by the U.S. Department of Defense, including, but not limited to uses necessary for development, testing, production, training, operation, and maintenance of Armed Forces vessels, aircraft, space systems, ground vehicles, amphibious vehicles, deployable/expeditionary support equipment, munitions, and command and control systems.

Non-objection notice means the limited authorization granted by the relevant Agency official to import a specific individual shipment of a regulated substance in accordance with § 84.25.

On board aerospace fire suppression means use of a regulated substance in fire suppression equipment used on board commercial and general aviation aircraft, including commercial-derivative aircraft for military use; rotorcraft; and space vehicles. On board commercial aviation fire suppression systems are installed throughout mainline and regional passenger and freighter aircraft, including engine nacelles, auxiliary power units (APUs), lavatory trash receptacles, baggage/crew compartments, and handheld extinguishers.

Person means any individual or legal entity, including an individual, corporation, partnership, association, state, municipality, political subdivision of a state, Indian tribe; any agency, department, or instrumentality of the United States; and any officer, agent, or employee thereof.

Process agent means the use of a regulated substance to form the environment for a chemical reaction or inhibiting an unintended chemical reaction (*e.g.*, use as a solvent, catalyst, or stabilizer) where the regulated substance is not consumed in the reaction, but is removed or recycled back into the process and where no more than trace quantities remain in the final product. A feedstock, in contrast, is consumed during the reaction.

Production/Produce means the manufacture of a regulated substance from a raw material or feedstock chemical (but not including the destruction of a regulated substance by a technology approved by the Administrator as provided in § 84.29). The term production does not include:

- (1) The manufacture of a regulated substance that is used and entirely consumed (except for trace quantities) in the manufacture of another chemical;
- (2) The reclamation, reuse, or recycling of a regulated substance; or
- (3) Insignificant quantities of a regulated substance inadvertently or coincidentally generated from any of the following, independent circumstances: during a chemical manufacturing process, resulting from unreacted feedstock, from the listed substance's use as a process agent present as a trace quantity in the chemical substance being manufactured, as an unintended byproduct of research and development applications, or during semiconductor manufacturing processes.

Production allowances means the limited authorization to produce regulated substances; however, production allowances may be used to produce regulated substances only in conjunction with consumption allowances. A person's production allowances are the total of the allowances obtained under § 84.9 or § 84.15 as may be modified under §§ 84.19 (transfer of allowances) and 84.35 (administrative consequences).

Production line means any process equipment (*e.g.*, reactor, distillation column) used to convert raw materials or feedstock chemicals into regulated substances or consume regulated substances in the production of other chemicals.

Reclaim means the reprocessing of regulated substances to all of the specifications in appendix A to 40 CFR part 82, subpart F (based on AHRI Standard 700–2016) that are applicable to that regulated substance and to verify that the regulated substance meets these specifications using the analytical methodology prescribed in section 5 of appendix A to 40 CFR part 82, subpart F.

Regulated substance means a hydrofluorocarbon listed in the table contained in subsection (c)(1) of the AIM Act and a substance included as a regulated substance by the Administrator under the authority granted in subsection (c)(3). A current list of regulated substances can be found in appendix A to this part.

Repackagers means entities who transfer regulated substances, either alone or in a blend, from one container to another container prior to sale or distribution or offer for sale or distribution. An entity that services system cylinders for use in fire suppression equipment and returns the same regulated substances to the same system cylinder it was recovered from after the system cylinder is serviced is not a repackager.

Representative sample means a sample collected from a container offered for sale or distribution using a sampling method that obtains all components of regulated substance(s) in an unbiased and precise manner; and a sample that can be used to infer that the composition of regulated substance(s) in a population of containers offered for sale or distribution that constitute, or are derived from, the batch, are within stated tolerances.

Space vehicle means a man-made device, either manned or unmanned, designed for operation beyond Earth's atmosphere. This definition includes integral equipment such as models,

Environmental Protection Agency

§ 84.5

mock-ups, prototypes, molds, jigs, tooling, hardware jackets, and test coupons. Also included is auxiliary equipment associated with tests, transport, and storage, which through contamination can compromise the space vehicle performance.

Structural composite preformed polyurethane foam means a foam blown from polyurethane that is reinforced with fibers and with polymer resin during the blowing process, and is preformed into the required shape (*e.g.*, specific boat or trailer design) to increase structural strength while reducing the weight of such structures.

Transform means to use and entirely consume (except for trace quantities) a controlled substance in the manufacture of other chemicals. A regulated substance that is used and entirely consumed (except for trace quantities) in the manufacture of another chemical is called a feedstock.

Transshipment means the continuous shipment of a regulated substance, from a foreign country of origin through the United States or its territories, to a second foreign country of final destination, as long as the shipment does not enter U.S. commerce. A transshipment, as it moves through the United States or its territories, cannot be repackaged, sorted, or otherwise changed in condition.

Used regulated substances means regulated substances that have been recovered from their intended use systems (including regulated substances that have been, or may be subsequently, recycled or reclaimed).

[86 FR 55201, 55206, Oct. 5, 2021, as amended at 88 FR 46893, July 20, 2023]

EFFECTIVE DATE NOTE: At 88 FR 46894, July 20, 2023, § 84.3 was amended by adding the definition “laboratory testing” in alphabetical order, effective Oct. 1, 2024. For the convenience of the user, the added text is set forth as follows:

§ 84.3 Definitions.

* * * * *

Laboratory testing means the use of the sampling and testing methodology prescribed in § 84.5(i)(3) by a laboratory that is accredited to ISO 17025 in accordance with ISO/IEC 17025:2017(E) (incorporated by reference, see § 84.37), or certified under the AHRI Refrigerant Testing Laboratory Cer-

tification Program in accordance with the AHRI RTL OM and AHRI General OM (both incorporated by reference, see § 84.37), or recognized under OSHA’s Nationally Recognized Testing Laboratory program in accordance with requirements codified at 29 CFR 1910.7.

* * * * *

§ 84.5 Prohibitions relating to regulated substances.

(a) *Production.* (1) As of January 1, 2022, no person may produce regulated substances, intentionally or unintentionally, in excess of the quantity of unexpended production allowances and consumption allowances or unexpended application-specific allowances held by that person under the authority of this subpart at that time in that control period. Every kilogram of production in excess of allowances expended constitutes a separate violation of this subpart. The required amount of allowances that must be expended will be calculated to the tenth with a minimum expenditure of 0.1 allowances for any production of regulated substances.

(2) As of January 1, 2022, no person may expend production allowances to produce a quantity of regulated substances unless that person expends an equal quantity of consumption allowances at the same time.

(3) A person is not required to expend production, consumption, or application-specific allowances to produce regulated substances if the regulated substances are destroyed using a technology approved by the Administrator for destruction under § 84.29 within 30 days of generating the regulated substance if the destruction technology is located at the facility where production occurred or 120 days of generating the regulated substance if the destruction technology is not located at the facility where production occurred.

(4) No person may expend production or consumption allowances for generation of HFC-23 that is emitted at the same facility as where it is produced. Consistent with this prohibition, prior to the emissions standard compliance date established in § 84.27, neither production nor consumption allowances are required for HFC-23 emitted at the same facility as where it is produced.

(b) *Import.* This paragraph applies starting January 1, 2022.

(1) No person may import bulk regulated substances, either as a single component or a multicomponent substance, except:

(i) If the importer of record possesses at the time they are required to submit reports to EPA pursuant to § 84.31(c)(7), and expends at the time of ship berthing for vessel arrivals, border crossing for land arrivals such as trucks, rails, and autos, and first point of terminus in U.S. jurisdiction for arrivals via air, consumption or application-specific allowances in a quantity equal to the exchange-value weighted equivalent of the regulated substances imported, whether present as a single component or a multicomponent blend. The required amount of allowances must be calculated to the tenth, but a minimum expenditure of 0.1 allowances is required for any import of regulated substances;

(ii) After receipt of a non-objection notice for substances for use in a process resulting in their transformation or their destruction in accordance with § 84.25(a);

(iii) After receipt of a non-objection notice for used regulated substances imported for destruction in accordance with § 84.25(b);

(iv) As a transshipment in accordance with § 84.31(c)(3) if all transhipped regulated substance is exported from the United States within six months of its import; or

(v) All imports pursuant to paragraph (b)(1)(i) or (ii) of this section must be physically accompanied by a certificate of analysis, if the certificate of analysis has not been electronically submitted pursuant to § 84.31(c)(7)(xvi).

(2) No person may attempt to land bulk regulated substances on, bring regulated substances into, or introduce regulated substances into, any place subject to the jurisdiction of the United States without meeting one of the categories set forth in § 84.5(b)(1).

(3) Each person meeting the definition of importer for a particular regulated substance import transaction is jointly and severally liable for a violation of paragraph (b)(1) of this section, unless they can demonstrate that the importer of record possessed and ex-

pended allowances in accordance with the requirement outlined in paragraph (b)(1)(i) or (v) of this section or another party who meets the definition of an importer met one of the exceptions set forth in paragraphs (b)(1)(ii) through (iv) of this section.

(4) Imports authorized under paragraph (b)(1)(ii) of this section may not be in containers designed to hold 100 pounds or less of a regulated substance.

(5) A person issued a non-objection notice for the import of an individual shipment of regulated substances under paragraph (b)(1)(ii) or (iii) of this section may not transfer or confer the right to import.

(6) No person may introduce into U.S. commerce any regulated substance claimed as a transshipment.

(7) Every kilogram of bulk regulated substances imported contrary to this paragraph (b) constitutes a separate violation of this subpart. Import of less than one kilogram of bulk regulated substance contrary to this paragraph (b) constitutes a separate violation of this subpart.

(c) *Application-specific uses.* (1) As of January 1, 2022, no person may confer application-specific allowances for the production or import of a regulated substance in excess of the amount of unexpended application-specific allowances held by that person under the authority of this subpart at that time in that control period. No person may expend an application-specific allowance for regulated substances to be used in any application other than the one identified by the application-specific allowance expended. Every kilogram of production or import in excess of the application-specific allowances expended by the producer or importer constitutes a separate violation of this subpart. Production or import of less than one kilogram of regulated substance in excess of the application-specific allowances expended by the producer or importer constitutes a separate violation of this subpart.

(2) No person may use a regulated substance produced or imported by expending application-specific allowances for any purpose other than those for which the application-specific allowance was allocated, and as set forth in this paragraph (c). Application-specific

Environmental Protection Agency

§ 84.5

allowances are apportioned to a person under §§ 84.13 and 84.15 for the production or import of regulated substances solely for the individual application listed on the allowance, which may include:

- (i) A propellant in metered dose inhalers;
- (ii) Defense sprays;
- (iii) Structural composite preformed polyurethane foam for marine use and trailer use;
- (iv) The etching of semiconductor material or wafers and the cleaning of chemical vapor deposition chambers within the semiconductor manufacturing sector;
- (v) Mission-critical military end uses, such as armored vehicle engine and shipboard fire suppression systems and systems used in deployable and expeditionary applications; and
- (vi) On board aerospace fire suppression.

(3) This provision applies starting January 1, 2022.

(i) No person may acquire application-specific allowances unless for use in the same application as associated with the application-specific allowance. No person may transfer or confer application-specific allowances unless for use in the same application as associated with the application-specific allowance.

(ii) No person may acquire or sell regulated substances produced or imported using application-specific allowances for use in anything other than the application for which it was originally allocated. Every kilogram of a regulated substance imported or exported in contravention of this paragraph constitutes a separate violation of this subpart. Import or export of less than one kilogram of regulated substance in contravention of this paragraph constitutes a separate violation of this subpart.

(d) *Calendar-year allowances.* All production, consumption, and application-specific allowances may only be expended for production or import occurring in the calendar year for which the allowances are allocated (*i.e.*, January 1 through December 31). No person may expend, transfer, or confer a production, consumption, or application-specific allowance after December 31 of

the year for which it was issued. Entities may transfer or confer their production, consumption, or application-specific allowances before January 1 of the calendar year for which the allowances were allocated.

(e) *International transfers.* This paragraph applies starting January 1, 2022.

(1) No person subject to the requirements of this subpart may transfer a production allowance to a person in a foreign country unless that country has established the same or similar requirements or otherwise undertaken commitments regarding the production and consumption of regulated substances as are contained in the AIM Act, as determined by the relevant agency official.

(2) No person may transfer production allowances to or from a person in a foreign country without satisfying the requirements in § 84.19. Every production allowance transferred in contravention of this paragraph constitutes a separate violation of this subpart.

(f) *Sale and distribution.* No person may sell or distribute, or offer for sale or distribution, any regulated substance that was produced or imported in violation of paragraphs (a) through (d) of this section, except for such actions needed to re-export the regulated substance. Every kilogram of a regulated substance sold or distributed, or offered for sale or distribution, in contravention of this paragraph constitutes a separate violation of this subpart. Sale or distribution, or offer for sale or distribution, of less than one kilogram of regulated substance in contravention of this paragraph constitutes a separate violation of this subpart.

(g) *False information.* No person may provide false, inaccurate, or misleading information to the EPA when petitioning, reporting, or for any communication required under this subpart.

(h) *Disposable cylinders.* (1) As of July 1, 2025, no person may import or domestically fill a regulated substance in a non-refillable cylinder.

(2) As of January 1, 2027, no person may sell or distribute, or offer for sale or distribution regulated substances contained in a non-refillable cylinder.

(3) Small cans containing less than two pounds of regulated substances that have a self-sealing valve that meets the requirements in 40 CFR 82.154(c)(2) are not subject to this restriction.

(i) *Labeling.* (1) As of January 1, 2022, no person may sell or distribute, offer for sale or distribution, or import containers containing a regulated substance that lacks a label or other permanent markings stating the common name(s), chemical name(s), or ASHRAE designation of the regulated substance(s) or blend contained within, and the percentages of the regulated substances if a blend. The label or other permanent markings must be:

(i) Durable and printed or otherwise labeled on, or affixed to, the external surface of the bulk regulated substance container;

(ii) Readily visible and legible;

(iii) Able to withstand open weather exposure without a substantial reduction in visibility or legibility;

(iv) Displayed on a background of contrasting color; and

(v) If a container of a regulated substance is contained within a box or other overpack, the exterior packaging must contain legible and visible information of what regulated substance is contained within.

(2) No person other than the importer of record may repackaging or relabel regulated substances that were initially

unlabeled or mislabeled. In order to repackaging the regulated substances, the importer of record must either:

(i) Expend consumption allowances equal to the amount of allowances that would be required if each cylinder were full of HFC-23; or

(ii) Verify the contents with independent laboratory testing results and affix a correct label on the container that matches the lab-verified test results before the date of importation (consistent with the definition at 19 CFR 101.1) of the container.

(3)(i) No person producing, importing, exporting, reclaiming, recycling for fire suppression, or repackaging regulated substances, whether as a single or multicomponent substance, may sell or distribute, or offer for sale or distribution, those regulated substances without first conducting laboratory testing of a representative sample of the regulated substances that they are producing, importing, exporting, reclaiming, recycling for fire suppression, or repackaging to verify that the composition of the regulated substance(s) matches the container labeling using the sampling and testing methodology prescribed in appendix A to 40 CFR part 82, subpart F for regulated substances offered for sale and distribution as refrigerants and using the following sampling and testing method for regulated substances offered for non-refrigerant uses:

TABLE 1 TO PARAGRAPH (i)(3)(i) NON-REFRIGERANT REGULATED SUBSTANCE SAMPLING AND TESTING METHODS

Regulated substance	Sampling and testing method
HFC–23, HFC–134, HFC–125, HFC–143a, HFC–41, HFC–152a.	Appendix A to 40 CFR part 82, subpart F, Sections 1, 2, 3, 5.1, 5.2, 5.3, 7, 8; <i>Part 7 of 2008 Appendix C for Analytical Procedures for AHRI Standard 700–2014—Normative</i> , (incorporated by reference in § 84.37). ³
HFC–134a, HFC–143, HFC–245fa, HFC–32, HFC–152	Appendix A to 40 CFR part 82, subpart F, Sections 1, 2, 3, 5.1, 5.2, 5.3, 7, 8; <i>Part 9 of 2008 Appendix C for Analytical Procedures for AHRI Standard 700–2014—Normative</i> , (incorporated by reference in § 84.37). ³
HFC–227ea, HFC–236cb, HFC–236ea, HFC–236fa, HFC–245ca, HFC–365mfc, HFC–43–10mee.	Sections 8, ¹ 9, 10, 11, 12, ² and 13 of EPA Method 18 as applicable—appendix A–6 to 40 CFR part 60—Test Methods 16 through 18. Or ASTM D6806–02 (2022), <i>Standard Practice for Analysis of Halogenated Organic Solvents and Their Admixtures by Gas Chromatography</i> (incorporated by reference in § 84.37). ⁴

¹ Only applicable portions of section 8 as specified here are required. Canisters may be used in place of bags for the purposes of these requirements. A sampling and analysis procedure under section 8.2 which provides for a representative sample is required (while section 8.2.1.5 is likely most appropriate, other procedures may be acceptable). Sections 8.4.1, 8.4.2.1, and 8.4.2.2 are required.

² “Dry basis” concentrations do not need to be recorded.

³ ASTM D6064–11 (reapproved 2022), *Standard Specification for HFC–227ea, 1,1,1,2,3,3,3-Heptafluoropropane (CF3CHFCF3)* (incorporated by reference in § 84.37) may be used as an alternative for non-refrigerant regulated substances offered for fire suppression use.

Environmental Protection Agency

§ 84.9

⁴ ASTM D6231/D6231M–21, *Standard Specification for HFC–125 (Pentafluoroethane, C2HF5)* (incorporated by reference in § 84.37) and ASTM D6541–21 *Standard Specification for HFC–236fa, 1,1,1,3,3,3-Hexafluoropropane, (CF3CH2CF3)*, (incorporated by reference in § 84.37) reference ASTM D6806 and may be used as an alternative for non-refrigerant regulated substances offered for fire suppression use.

(ii) No person may sell or distribute, or offer for sale or distribution, regulated substances, whether as a single or multicomponent substance, as a refrigerant (except if recovered from and recycled for use in motor vehicle air conditioning or motor vehicle air conditioning-like appliances in accordance with 40 CFR part 82, subpart B) that do not meet the specifications in appendix A to 40 CFR part 82, subpart F—Specifications for Refrigerants, or, if not listed therein, appendix A1 to 40 CFR part 82, subpart F. For persons who are producing, importing, reclaiming, recycling for fire suppression, or repackaging regulated substances, the applicable specifications must be verified using laboratory testing and the sampling and testing methodology prescribed in appendix A to 40 CFR part 82, subpart F.

(j) *Relationship to other laws.* Section (k) of the AIM Act states that sections 113, 114, 304, and 307 of the Clean Air Act (42 U.S.C. 7413, 7414, 7604, 7607) shall apply to this section and any rule, rulemaking, or regulation promulgated by the Administrator pursuant to this section as though this section were expressly included in title VI of that Act (42 U.S.C. 7671 *et seq.*). Violation of this part is subject to Federal enforcement and the penalties laid out in section 113 of the Clean Air Act.

[86 FR 55206, Oct. 5, 2021, as amended at 88 FR 46894, July 20, 2023]

§ 84.7 Phasedown schedule.

(a) *Phasedown from baseline.* Total production and consumption of regulated substances in the United States in each year cannot exceed the amounts (shown as a percentage of baseline) in the following table:

Date	Percentage of production baseline (percent)	Percentage of consumption baseline (percent)
(1) 2022–2023	90	90
(2) 2024–2028	60	60
(3) 2029–2033	30	30
(4) 2034–2035	20	20
(5) 2036 and thereafter	15	15

(b) *Annual production and consumption limits.* (1) The production baseline for regulated substances is 382,535,439 metric tons of exchange value equivalent.

(2) The consumption baseline for regulated substances is 302,538,316 metric tons of exchange value equivalent.

(3) Total production and consumption in metric tons of exchange value equivalent for regulated substances in the United States in each year is derived by multiplying the production baseline or consumption baseline by the percentage in paragraph (a) of this section. Total production and consumption allowances issued under this subpart may not exceed the quantities shown in the following table:

TABLE 2 TO PARAGRAPH (b)(3)

Year	Total production (MTEVe)	Total consumption (MTEVe)
(i) 2022–2023	344,299,157	273,498,315
(ii) 2024–2028	229,521,263	181,522,990
(iii) 2029–2033	114,760,632	90,761,495
(iv) 2034–2035	76,507,088	60,507,663
(v) 2036 and thereafter	57,380,316	45,380,747

[86 FR 55201, Oct. 5, 2021, as amended at 88 FR 44225, July 12, 2023; 88 FR 46895, July 20, 2023]

§ 84.9 Allocation of calendar-year production allowances.

(a) The relevant agency official will issue, through a separate notification, calendar year 2022 and 2023 production allowances to entities that produced a

§ 84.11

40 CFR Ch. I (7–1–24 Edition)

regulated substance in 2020. The number of production allowances allocated to each eligible entity for 2022–2023 is calculated as follows:

(1) Take the average of the three highest annual exchange value-weighted production amounts that each eligible entity reported to the agency for calendar years 2011 through 2019;

(2) Sum the “average high year” values determined in step 1 of all eligible entities and determine each entity’s percentage of that total;

(3) Determine the amount of general pool production allowances by subtracting the quantity of application-specific allowances for that year as determined in accordance with § 84.13 and the set-aside in § 84.15 from the production cap in § 84.7(b)(3);

(4) Determine individual entities’ production allowance quantities by multiplying each entity’s percentage determined in step 2 by the amount of general pool allowances determined in step 3.

(b) Starting with the allocation of 2024 calendar years allowances, the relevant Agency official will issue, through a separate notification, calendar year production allowances to entities that produced a regulated substance in 2021 or 2022, or both 2021 and 2022. The allocation of calendar years 2024, 2025, 2026, 2027, and 2028 production allowances is calculated as follows for each entity:

(1) Take the average of the three highest annual exchange value-weighted production amounts that each eligible entity reported to the Agency for calendar years 2011 through 2019. If an entity, or commonly owned or controlled group of entities, does not have consumption amounts for three years between calendar years 2011 through 2019, the relevant Agency official will take the average of available year(s) of consumption for calendar years 2011 through 2019;

(2) Sum every entity’s average values determined in paragraph (b)(1) of this section and determine each entity’s percentage of that total;

(3) Determine the amount of general pool production allowances by subtracting the quantity of application-specific allowances for that year as determined in accordance with § 84.13

from the production cap in § 84.7(b)(3); and

(4) Determine individual entities’ production allowance quantities by multiplying each entity’s percentage determined in paragraph (b)(2) of this section by the amount of general pool allowances determined in paragraph (b)(3) of this section.

(c)(1) EPA will allocate calendar year production allowances to individual entities by October 1 of the calendar year prior to the year in which the allowances may be used based on the exchange value-weighted quantities calculated in paragraph (a)(4) of this section.

(2) EPA will provide public notice of the list of companies receiving production allowances as well as the quantities they will be allocated by that date.

(3) In addition to the procedure in paragraph (a) of this section, the relevant agency official will allocate calendar year production allowances to entities that qualified for allowances under § 84.15.

(4) If there are remaining production allowances after distribution from the set-aside under § 84.15, the relevant agency official will distribute such allowances on a pro rata basis to the entities in paragraph (a) of this section by March 31 of the calendar year in which the allowances may be used.

[86 FR 55201, Oct. 5, 2021, as amended at 88 FR 46895, July 20, 2023]

§ 84.11 Allocation of calendar-year consumption allowances.

(a) The relevant agency official will issue, through a separate notification, calendar years 2022 and 2023 consumption allowances to entities that imported or produced a bulk regulated substance in 2020, unless an individual accommodation is permitted by a relevant Agency official. If multiple entities that imported are related through shared corporate or common ownership or control, the relevant agency official will calculate and issue allowances to a single corporate or common owner. The number of consumption allowances allocated to each eligible entity for 2022–2023 is calculated as follows:

Environmental Protection Agency

§ 84.11

(1) Take the average of the three highest annual exchange value-weighted consumption amounts chosen at the corporate or common ownership level for eligible entities reporting to the agency for each calendar year 2011 through 2019;

(2) Sum the “average high year” values determined in step 1 of all eligible entities and determine each entity’s percentage of that total;

(3) Determine the amount of general pool consumption allowances by subtracting the quantity of application-specific allowances for that year as determined in accordance with § 84.13 and the set-aside in § 84.15 from the consumption cap § 84.7(b)(3);

(4) Determine individual entity consumption allowance quantities by multiplying each entity’s percentage determined in step 2 by the amount of general pool allowances determined in step 3.

(b) Starting with the allocation of 2024 calendar years allowances the relevant Agency official will issue, through a separate notification, calendar year consumption allowances. The allocation of calendar year 2024, 2025, 2026, 2027, and 2028 consumption allowances is calculated as follows for each entity:

(1) For new market entrants that were allocated allowances pursuant to § 84.15(e)(3), take the allowances allocated for calendar year 2023 and divide that value by the proportion of calendar year 2023 consumption allowances received by general pool allowance holders pursuant to paragraph (a) of this section relative to their high three average calculated pursuant to paragraph (a)(2) of this section;

(2) For entities that produced or imported a regulated substance in 2021 or 2022, or both 2021 and 2022, and have not been allocated allowances pursuant to § 84.15(e)(3), the relevant Agency official will calculate and issue allowances. This calculation and issuance will be to a single entity if multiple entities with historic consumption data are related through shared corporate or common ownership. The relevant Agency official will take the average of the three highest annual exchange value-weighted consumption amounts, which for entities related through shared cor-

porate or common ownership or control would be aggregated and averaged at the corporate or common ownership level, that each eligible entity reported to the Agency for calendar years 2011 through 2019. If an entity, or commonly owned or controlled group of entities, does not have consumption amounts for three years between calendar years 2011 through 2019, the relevant Agency official will take the average of available year(s) of consumption for calendar years 2011 through 2019;

(3) If an entity has a value calculated under paragraphs (b)(1) and (b)(2) of this section, take the single higher value;

(4) If an entity allocated allowances pursuant to § 84.15(e)(3) was acquired by an entity that has a market share calculable under paragraph (b)(2) of this section, and EPA has approved this acquisition, sum the value calculated under paragraph (b)(1) of this section for the entity allocated allowances pursuant to § 84.15(e)(3) with the value calculated under paragraph (b)(2) of this section disregarding any historic consumption activity by the entity allocated allowances pursuant to § 84.15(e)(3), except this paragraph (b)(4) shall not apply to an entity allocated allowances pursuant to § 84.15(e)(3) that has a higher value calculated under paragraph (b)(2) of this section than under paragraph (b)(1) of this section;

(5) Sum every entity’s values as determined in paragraphs (b)(1), (2), (3), and (4) of this section and determine each entity’s percentage of that total;

(6) Determine the amount of general pool consumption allowances by subtracting the quantity of application-specific allowances for that year as determined in accordance with § 84.13 from the consumption cap in § 84.7(b)(3); and

(7) Determine individual entities’ consumption allowance quantities by multiplying each entity’s percentage determined in paragraph (b)(5) of this section by the amount of general pool allowances determined in paragraph (b)(6) of this section.

(c)(1) EPA will allocate calendar year consumption allowances to individual entities by October 1 of the calendar

§ 84.13

40 CFR Ch. I (7–1–24 Edition)

year prior to the year in which the allowances may be used based on the exchange value-weighted quantities calculated in paragraph (a)(4) of this section.

(2) EPA will provide public notice of the list of companies receiving consumption allowances as well as how they will be allocated by that date.

[86 FR 55201, Oct. 5, 2021, as amended at 88 FR 46896, July 20, 2023]

§ 84.13 Allocation of application-specific allowances.

(a) Application-specific allowances are available to entities for calendar years 2022, 2023, 2024, and 2025 that use a regulated substance in the following applications:

(1) As a propellant in metered dose inhalers;

(2) In the manufacture of defense sprays;

(3) In the manufacture of structural composite preformed polyurethane foam for marine use and trailer use;

(4) In the etching of semiconductor material or wafers and the cleaning of chemical vapor deposition chambers within the semiconductor manufacturing sector;

(5) For mission-critical military end uses; and

(6) For on board aerospace fire suppression.

(b) Entities identified in paragraph (a) of this section must request application-specific allowances by July 31 of the calendar year prior to the year in which the allowances may be used starting with the calendar year 2023 allocation. The application must include the information required in § 84.31(h)(2) except for applications for mission-critical military end uses, which must include the information required in § 84.31(h)(3).

(1) Entities must provide additional information if requesting that EPA consider unique circumstances that are not reflected by the rates of growth calculated in paragraph (c)(1) of this section. The relevant agency official will consider the following situations as unique circumstances:

(i) Demonstrated manufacturing capacity coming on line;

(ii) The acquisition of another domestic manufacturer or its manufacturing facility or facilities; or

(iii) A global pandemic or other public health emergency that increases patients diagnosed with medical conditions treated by metered dose inhalers.

(2) [Reserved]

(c) The relevant agency official will determine the quantity of application-specific allowances to issue to each company by:

(1) Taking the higher of the use of regulated substances by the company in the specific application in the prior year multiplied by:

(i) The average growth rate of use for the company over the past three years; or

(ii) The average growth rate of use by all companies requesting allowances for that specific application over the past three years; and

(2) Accounting for any additional information provided regarding unique circumstances described in paragraph (b)(1) of this section; and

(3) Subtracting out any general pool allowances allocated to the company for that calendar year.

(d)(1) EPA will allocate application-specific allowances by October 1 of the calendar year prior to the year in which the allowances may be used. The relevant agency official will issue, through a separate notification, application-specific allowances to eligible entities consistent with paragraphs (a) through (c) of this section.

(2) EPA will provide public notice by that date of the list of entities receiving application-specific allowances, the quantity of allowances for each entity, and the specific application(s) for which the allowances may be used.

(e) Entities that use regulated substances in one of the six applications listed in paragraph (a) of this section and were not issued allowances as of October 1, 2021, may request allowances under the procedure in § 84.15. Such entities must meet the criteria for eligibility in this section and are subject to the requirements of this section and § 84.31(h).

(f) EPA will publish a list of entities allocated application-specific allowances, the application for which they

may use regulated substances, and the quantity of allowances allocated.

(g) Application-specific allowances may be expended for either the import or production of a regulated substance.

(h) Entities allocated application-specific allowances may confer application-specific allowances to a producer, importer, or other supplier without being subject to the offset required of transfers of allowances in § 84.19. The recipient of a conferred application-specific allowance may continue to confer the allowance until it is expended for production or import. When conferring application-specific allowances, the conferring party must provide a statement certifying that the regulated substances produced or imported with the conferred allowances will only be used for the application-specific use associated with the allowance(s). The producer(s), importer(s), and/or supplier(s) receiving application-specific allowances must certify to the conferring party that they will not sell regulated substances produced or imported with application-specific allowances for any application or use other than the application-specific use associated with the allowance(s).

[86 FR 55201, 55208, Oct. 5, 2021]

§ 84.15 Set-aside of application-specific allowances, production allowances, and consumption allowances.

(a) Total allowances available under this section to be allocated for calendar years 2022 and 2023 are:

(1) Up to 7.5 million metric tons of exchange value equivalent consumption allowances annually for calendar years 2022 and 2023.

(2) Up to 2.5 million metric tons of exchange value equivalent production allowances for calendar years 2022 and 2023.

(b)(1) Consumption and production allowances in paragraph (a) of this section are available in the form of application-specific allowances to entities that qualify for application-specific allowances under § 84.13 that were not issued allowances as of October 1, 2021.

(2) Entities must provide the relevant Agency official with the information contained in § 84.13 by November 30, 2021 to be eligible for consideration.

(c) Consumption allowances in paragraph (a) of this section are available to either:

(1) Persons who imported regulated substances in 2020 that were not required to report under 40 CFR part 98 and were not issued allowances as of October 1, 2021; or

(2) Persons who are newly importing regulated substances, do not share corporate or common ownership, corporate affiliation in the past five years, or familial relations with entities receiving allowances through this rule.

(d)(1) Persons who meet the criteria listed in paragraph (c)(1) of this section must provide the relevant Agency official with the following information by November 30, 2021, to be eligible for consideration:

(i) Name and address of the company, the complete ownership of the company (with percentages of ownership), and contact information for a designated representative at the company;

(ii) The following information on an annual basis for all years between 2011 and 2020 where the person imported regulated substances:

(A) The total quantity (in kilograms) imported of each regulated substance each year, including each shipment, dates of and port of entry for each import, and country from which the imported regulated substances were imported;

(B) The Harmonized Tariff Schedule codes and CAS numbers for the regulated substances or blends imported;

(C) The quantity (in kilograms) of regulated substances imported for use in processes resulting in their transformation or destruction; and

(D) The quantity (in kilograms) of regulated substances sold or transferred during that year to each person for use in processes resulting in their transformation or destruction.

(iii) The following information on an annual basis for all years between 2011 and 2020 where the person exported regulated substances:

(A) The names and addresses of the exporter and the recipient of the exports;

(B) The exporter's Employer Identification Number;

(C) The quantity of each specific regulated substance exported, including

the quantity of regulated substance that is used, reclaimed, or recycled;

(D) The date on which, and the port from which, the regulated substances were exported from the United States or its territories;

(E) The country to which the regulated substances were exported; and

(F) The Harmonized Tariff Schedule codes and CAS numbers for the regulated substances shipped.

(2) Persons who meet the criteria listed in paragraph (c)(2) of this section must provide the relevant Agency official with the following information by November 30, 2021, to be eligible for consideration:

(i) Name and address of the company, the complete ownership of the company (with percentages of ownership), and contact information for a designated representative at the company;

(ii) Whether the company is a woman- or minority-owned business;

(iii) Contact information for the owner of the company;

(iv) The date of incorporation and State in which the company is incorporated;

(v) State license identifier;

(vi) A plan for importing regulated substances;

(vii) A prospective foreign exporter that the applicant anticipates working with;

(viii) A certification that the business owner understands the regulatory requirements of this part and will make best efforts to comply with the regulatory requirements; and

(ix) A certification that the information submitted is complete, accurate, and truthful.

(e) The relevant Agency official will allocate calendar-year 2022 and 2023 allowances in paragraph (a) of this section no later than March 31, 2022, in the following manner:

(1) First, persons who meet the criteria listed in paragraph (b) of this section are allocated application-specific allowances (subtracted from both the production and consumption portions of the set-aside pool) for 2022 equal to the estimated need, based on projected, current, and historical trends, and subject to the same conditions for such allowances in § 84.13;

(2) Second, persons who meet the criteria listed in paragraph (c)(1) of this section are allocated allowances for 2022 by calculating their “average high year” based on the formula in § 84.11(a)(1) and then applying the same reduction percentage between the values calculated in § 84.11(a)(1) and (4) for all general pool allowance holders.

(3) Third, persons who meet the criteria listed in paragraph (c)(2) of this section are allocated up to 0.2 million metric tons exchange value equivalent in allowances for 2022 and 2023.

(4) If the eligible requests received total an amount of allowances that exceeds the remaining quantity of allowances in the set-aside pool, after subtracting allowances issued under paragraphs (b)(1) and (c)(1) of this section, the amount provided to each person who meets the criteria listed in paragraph (c)(2) of this section that has applied to the set-aside pool will be allocated an amount of allowances that is reduced on a pro rata basis. If any allowances remain after the steps outlined in paragraphs (b)(1) and (c)(1) and (2) of this section, those allowances will be distributed to the persons who meet the criteria listed in §§ 84.9 and 84.11 on a pro rata basis.

(f) EPA is placing restrictions on allowances allocated under this section.

(1) Allowances allocated to persons under paragraph (e)(3) of this section, due to their eligibility of meeting the criteria in paragraph (c)(2) of this section, may not be transferred to another entity.

(2) Allowances issued under this section are not available to companies that are a subsidiary of, have any common ownership stake with, had corporate affiliation in the past five years with, or have a familial relationship with another allowance holder.

(g) EPA will provide public notice by March 31, 2022, of the list of entities receiving allowances under this paragraph, the quantity of allowances for each entity, and the specific application(s) for which the allowances may be used, where applicable.

§ 84.17 Availability of additional consumption allowances.

A person may obtain at any time during the year, in accordance with the

Environmental Protection Agency

§ 84.19

provisions of this section, consumption allowances equivalent to the quantity of regulated substances that the person exported from the United States and its territories to a foreign country in accordance with this section.

(a) The exporter must submit to the relevant Agency official a request for consumption allowances setting forth the following:

(1) The identities and addresses of the exporter and the recipient of the exports;

(2) The exporter's Employer Identification Number;

(3) The names, telephone numbers, and email addresses of contact persons for the exporter and the recipient;

(4) The quantity (in kilograms) and name of the regulated substances exported;

(5) The source of the regulated substances and the date purchased;

(6) The date on which, and the port from which, the regulated substances were exported from the United States or its territories;

(7) The country to which the regulated substances were exported;

(8) A copy of the bill of lading and the invoice indicating the net quantity (in kilograms) of regulated substances shipped and documenting the sale of the regulated substances to the purchaser;

(9) The Harmonized Tariff Schedule codes of the regulated substances exported;

(10) Internal Transaction Numbers for all shipments; and

(11) All international export declaration documentation (*i.e.*, electronic export information), which is electronically filed within AES.

(b) The relevant Agency official will review the information and documentation submitted under paragraph (a) of this section and will issue a notice to the requestor within 15 working days.

(1) The relevant Agency official will determine the quantity of regulated substances that the documentation verifies was exported and issue consumption allowances equivalent to the quantity of regulated substances that were exported.

(i) The grant of the consumption allowances will be effective on the date the notice is issued.

(ii) The consumption allowances will be granted to the person the exporter indicates, whether it is the producer, the importer, or the exporter.

(iii) The consumption allowances will be valid until December 31 of the same calendar year in which the regulated substances were exported.

(2) The relevant Agency official will issue a notice that the consumption allowances are not granted if the official determines that the information and documentation do not satisfactorily substantiate the exporter's claims.

[86 FR 55208, Oct. 5, 2021, as amended at 88 FR 46896, July 20, 2023]

§ 84.19 Transfers of allowances.

(a) *Inter-company transfers.* As of January 1, 2022, a person ("transferor") may transfer to any other person ("transferee") any quantity of the transferor's production allowances, consumption allowances, or application-specific allowances for use by the same type of application, as long as the following conditions are met:

(1) An offset equal to five percent of the amount of allowances transferred will be deducted from the transferor's production allowance balance if a transfer is made of production allowances, or deducted from the transferor's consumption allowance balance if a transfer is made of consumption allowances. In the case of transferring application-specific allowances, one percent of the amount of allowances transferred will be deducted from the transferor's application-specific allowance balance.

(2) The transferor must submit to the relevant Agency official a transfer claim setting forth the following:

(i) The identities and addresses of the transferor and the transferee;

(ii) The names, telephone numbers, and email addresses of contact persons for the transferor and the transferee;

(iii) The type of allowances being transferred, including the specific application (if applicable), for which allowances are to be transferred;

(iv) The quantity (in MTEVe) of allowances being transferred;

(v) The total cost of the allowances transferred;

(vi) The amount of unexpended allowances of the type and for the year being

transferred that the transferor holds under authority of this subpart as of the date the claim is submitted to EPA;

(vii) The quantity of the offset to be deducted from the transferor's allowance balance; and

(viii) For transfers of application-specific allowances, a signed document from the transferee certifying that the transferee will use the application-specific allowances only for the same application for which the application-specific allowance was allocated.

(3) The relevant Agency official will determine whether the records maintained by EPA indicate that the transferor possesses unexpended allowances sufficient to cover the transfer claim as of the date the transfer claim is processed. The transfer claim is the quantity in EVE to be transferred plus the quantity of the offset. The relevant Agency official will take into account any previous transfers, any production, and allowable imports and exports of regulated substances reported by the transferor. Within three working days of receiving a complete transfer claim, the relevant Agency official will take action to notify the transferor and transferee as follows:

(i) The relevant Agency official will issue a non-objection notice to both the transferor and transferee indicating if EPA's records show that the transferor has sufficient unexpended allowances to cover the transfer claim. In the case of transfers of production allowances or consumption allowances, the relevant agency official will reduce the transferor's balance of unexpended allowances by the quantity to be transferred plus five percent of that quantity. In the case of transfers of application-specific allowances the relevant agency official will reduce the transferor's balance of unexpended allowances by the quantity to be transferred plus one percent of that quantity. The transferor and the transferee may proceed with the transfer when the relevant agency official issues a non-objection notice. However, if EPA ultimately finds that the transferor did not have sufficient unexpended allowances to cover the claim, the transferor and transferee will be liable for any violations of the regulations of this

subpart that occur as a result of, or in conjunction with, the improper transfer.

(ii) The relevant Agency official will issue an objection notice disallowing the transfer if EPA's records show that the transferor has insufficient unexpended allowances to cover the transfer claim, that the transferor has failed to respond to one or more Agency requests to supply information needed to make a determination, or that the transferor or transferee has been notified of an impending administrative consequence and therefore is disallowed from transferring allowances in accordance with § 84.35. Either transferor or transferee may file a notice of appeal, with supporting reasons, with the relevant Agency official within 10 working days after receipt of the objection notice. The official may affirm or vacate the disallowance. If no appeal is filed electronically by the tenth working day after notification, the disallowance shall be final on that day.

(4) The transferor and transferee must maintain a copy of the transfer claim and a copy of EPA's non-objection or objection notice for five years.

(5) An entity does not need to follow the procedures in this paragraph (a) to expend allowances possessed by another entity that is majority owned by it, it majority owns, related to it through majority ownership, or commonly owned with it.

(b) *International transfers of production allowances*—(1) *Requests*. A person may request to increase or decrease their production allowances for a specified control period through transfers of such allowances with a person in a foreign country if the applicable conditions in this paragraph are met. Once transferred, all allowances transferred consistent with this paragraph will function as a production allowance, as defined in § 84.3.

(i) *Timing of requests*. Any request for an increase or decrease in production allowances based on an international transfer under this paragraph must be submitted by October 1 of the year prior to the calendar year in which the transferred allowances would be usable.

(ii) *Timing of the transfer*. International transfers under this paragraph

will be deemed to occur, and the transferred allowances will be usable, as of January 1 of the calendar year to which the transfer applies.

(2) *Transfer from a person in a foreign country—information requirements.* (i) A person requesting to change their production allowances based on a transfer from a person in a foreign country must submit to the relevant Agency official at the time the international transfer is requested a signed document from an official representative in that country's embassy in the United States stating that the appropriate authority within that country has revised the domestic production limits for that country equal to the lowest of the following three production quantities and identifying which of the following three production quantities was lowest:

(A) The maximum production level permitted in § 84.7(b) in the year of the international transfer minus the quantity of production allowances (in exchange value-weighted kilograms) to be transferred;

(B) The maximum production level for the applicable regulated substances that are allowed under applicable law (including the foreign country's applicable domestic law) minus the quantity of production allowances (in exchange value-weighted kilograms) to be transferred; or

(C) The average of the foreign country's actual national production level of the applicable regulated substances for the three calendar years prior to the year of the transfer minus the quantity of production allowances (in exchange value-weighted kilograms) to be transferred.

(ii) A person requesting a revision based on a transfer from a foreign country ("transferee") must also submit to the relevant Agency official a true copy of the document that sets forth the following:

(A) The identity and address of the transferee;

(B) The foreign country authorizing the transfer;

(C) The names, telephone numbers, and email addresses of contact persons for the transferee and for the person in the foreign country;

(D) The name of the chemical and quantity (in kilograms) of production being transferred;

(E) Documentation that the foreign country possesses the necessary quantity of unexpended production rights;

(F) The calendar year to which the transfer applies; and

(G) A signed statement from a responsible official describing whether the increased production is intended for export or the market in the United States.

(3) *Transfer to a person in a foreign country—Information requirements.* A person requesting a transfer to a person in a foreign country must submit a request to the relevant Agency official that sets forth the following information:

(i) The identity and address of the person seeking to transfer the allowances ("transferor");

(ii) The foreign country authorizing the transfer;

(iii) The names, telephone numbers, and email addresses of contact persons for the transferor and for the person in the foreign country;

(iv) The name of the chemical and quantity (in kilograms) of allowable production being transferred; and

(v) The calendar year to which the transfer applies;

(vi) A signed statement from a responsible official requesting that the relevant Agency official revise the number of production allowances the transferor holds such that the aggregate national production in the United States is equal to the lowest of the following three production quantities and identifying which of the following three production quantities was lowest:

(A) The maximum production level permitted in § 84.7(b) in the year of the international transfer minus the quantity of production allowances (in exchange value-weighted kilograms) to be transferred;

(B) The maximum production for the applicable regulated substances that are allowed under applicable law minus the quantity of production allowances (in exchange value-weighted kilograms) to be transferred; or

(C) The average of the United States' actual national production level of the applicable regulated substances for the

three calendar years prior to the year of the transfer minus the quantity of production allowances (in exchange value-weighted kilograms) to be transferred.

(4) *Review of international transfer request to a foreign country.* After receiving a transfer request that meets the requirements of paragraph (b)(3) of this section, the relevant Agency official may, at his/her discretion, consider the following factors in deciding whether to approve such a transfer:

- (i) Possible economic hardships created by a transfer;
- (ii) Potential effects on trade;
- (iii) Potential environmental implications; and
- (iv) The total quantity of unexpended production allowances held by entities in the United States.

(5) *Notice of transfer.* The relevant Agency official will review the submitted requests to determine whether the foreign country in which the person is located has enacted or otherwise established the same or similar requirements or otherwise undertaken commitments regarding the production and consumption of regulated substances as are contained in the AIM Act, within a reasonable time frame of the date of its enactment. If it is determined that these conditions are not met, the relevant Agency official will notify the requestor in writing that no transfers to or from the country can occur. If these conditions are satisfied such that transfers to or from the country can occur, the relevant Agency official will consider if the request meets the applicable requirements of paragraph (b) of this section. If the request meets the requirements of paragraph (b)(2) of this section for transfers from foreign countries and paragraph (b)(3) of this section for transfers to foreign countries, and if the relevant Agency official has not decided to disapprove the request based on consideration of factors listed in paragraph (b)(4) of this section if applicable, the relevant Agency official will notify the person in writing that the appropriate production allowances were either granted or deducted and specify the control period to which the transfer applies. Notifications of production allowances granted or deducted will be

provided before January 1 of the calendar year to which the transfer applies.

(i) For transfers from a foreign country, such notification will reflect a revision of the balance of allowances held by the recipient of the transfer to equal the unexpended production allowances held by the recipient of the transfer plus the quantity of allowable production transferred from the foreign country minus an offset of five percent of the quantity transferred. The relevant Agency official will not adjust available allowances until the foreign country's representative has confirmed the appropriate number of allowances were deducted in the foreign country.

(ii) For transfers to a foreign country, such notification will reflect a revision of the balance of production allowances for the transferor such that the aggregate national production of the regulated substance to be transferred is equal to the value the relevant Agency official determines to be the lowest of:

(A) The maximum production level permitted in § 84.7(b) in the year of the international transfer minus the quantity of production allowances transferred and minus an offset of five percent of the quantity transferred; or

(B) The maximum production level for the applicable regulated substances that is allowed under applicable law (in exchange-value weighted kilograms) minus the quantity of production allowances transferred and minus an offset of five percent of the quantity transferred; or

(C) The average of the actual annual U.S. production of the applicable regulated substances for the three years prior to the date of the transfer (in exchange-value weighted kilograms minus the quantity of production allowances transferred and minus an offset of five percent of the quantity transferred).

(6) *Revised production limit for previous transferors.* If the average actual U.S. production during the three most recent calendar years before the date of the transfer is less than the total allowable U.S. production for the applicable regulated substances permitted in § 84.7(b) for a calendar year for which international transfers are approved to

occur, the aggregate allowed national U.S. production of those substances will be reduced by an additional amount beyond a simple deduction of the number of allowances reflected in the notifications under paragraph (b)(5)(ii)(B) of this section. In these circumstances, the relevant Agency official will revise the production limit for each transferor who obtained approval of a transfer of the applicable regulated substances to a foreign country in the same calendar year and notify each transferor of the revision in writing. The amount of the revision will equal the result of the following set of calculations:

(i) The total U.S. allowable production of the applicable regulated substances minus the average of the actual annual U.S. production of those substances during the three most recent calendar years prior to the calendar year of the transfer.

(ii) The quantity of production allowances for the applicable regulated substances transferred by the transferor in that calendar year divided by the total quantity of production allowances for those substances approved for transfer to a person in a foreign country by all the persons approved to make such transfers in that calendar year.

(iii) The result of paragraph (b)(6)(i) of this section multiplied by the result of paragraph (b)(6)(ii) of this section.

(iv) The unexpended production allowances held by the person minus the result of paragraph (b)(6)(iii) of this section.

(7) *Effective date of revised production limits.* If a revision is issued under paragraph (b)(6) of this section, the change in production allowances will be effective on the date that the notification is issued.

[86 FR 55208, Oct. 5, 2021, as amended at 88 FR 46896, July 20, 2023]

§ 84.21 Sale or conveyance of regulated substances produced or imported with application-specific allowances.

(a) *Sale or conveyance of regulated substances produced or imported using application-specific allowances.* (1) As of January 1, 2022, any person receiving an application-specific allowance (application-specific seller) may sell or convey

regulated substances produced or imported by expending that allowance to another person within the same application (application-specific purchaser) provided that the relevant Agency official approves the sale or conveyance.

(2) The application-specific seller must submit a claim to the relevant Agency official for approval before the sale or conveyance can take place. The claim must set forth the following:

(i) The identities and addresses of the application-specific seller and the application-specific purchaser;

(ii) The name, telephone numbers, and email addresses of contact persons for the application-specific seller and the application-specific purchaser;

(iii) The amount of each regulated substance being sold or conveyed;

(iv) The cost of the regulated substance being sold or conveyed;

(v) The application for which allowances were allocated and the specific products that the application-specific purchaser plans to produce with the regulated substances; and

(vi) Certification that the regulated substances will be used only for the same application for which the application-specific allowance under which the substances were produced or imported was allocated.

(3) The application-specific purchaser must submit a letter to the relevant Agency official stating that it concurs with the terms of the sale or conveyance as requested by the application-specific seller.

(4) Once the claim is complete, and if EPA does not object to the sale or conveyance, the relevant agency official will issue letters to the application-specific seller and the application-specific purchaser within 10 business days indicating that the transaction may proceed. EPA reserves the right to disallow a transaction if the claim is incomplete, or if it has reason to believe that the application-specific purchaser plans use the regulated substance in anything other than the stated application. If EPA objects to the transaction, the relevant agency official will issue letters to the application-specific seller and the application-specific purchaser stating the basis for disallowing the transaction.

§ 84.23

40 CFR Ch. I (7–1–24 Edition)

(5) The burden of proof is placed on the application-specific purchaser to retain sufficient records to prove that the sold or conveyed regulated substances are used only for the stated application.

(b) [Reserved]

[86 FR 55208, Oct. 5, 2021]

§ 84.23 Certification identification generation and tracking.

(a) *Scope and applicability.* Certification identifications may only be generated by a person that produces, imports, reclaims, recycles for fire suppression use, repackages, or blends regulated substance for distribution or sale in bulk and reports to EPA consistent with paragraph (d) of this section. All containers of bulk regulated substance, with the limited exceptions described in paragraph (b)(4) of this section, must be associated with certification identifications on the following schedule:

(1) As of January 1, 2025, all containers of bulk regulated substances imported and all containers sold or distributed by producers and importers must have a QR code.

(2) As of January 1, 2026, all containers of bulk regulated substances filled and all containers sold or distributed by all other repackagers and cylinder fillers in the United States not included in paragraph (a)(1) of this section, including reclaimers and fire suppressant recyclers must have a QR code.

(3) As of January 1, 2027, every container of bulk regulated substances sold or distributed, offered for sale or distribution, purchased or received, or attempted to be purchased or received must have a QR code.

(b) *Prohibitions.* Every kilogram of bulk regulated substances imported, sold or distributed, offered for sale or distribution, purchased or received, or attempted to be purchased or received in violation of this section is a separate violation of this subpart. Import, sale or distribution, offer for sale or distribution, purchase or receipt, or attempt to purchase or receive less than one kilogram of regulated substances in violation of this section is a separate violation of this subpart.

(1) No person may import, sell or distribute, or offer for sale or distribution, and no person may purchase or receive, or attempt to purchase or receive, a bulk regulated substance unless the container has a valid certification identification.

(2) No person may import, sell or distribute, or offer for sale or distribution, bulk regulated substances unless that person is registered with EPA consistent with paragraph (d) of this section.

(3) No person may purchase or receive, or attempt to purchase or receive, bulk regulated substances from a person that is not registered with EPA consistent with paragraph (d) of this section;

(4) The following situations are exempt from the prohibitions in paragraphs (b)(1) through (3) of this section:

(i) The regulated substances are part of a transshipment and the person transshipping the regulated substance has reported to EPA consistent with § 84.31(c)(3);

(ii) The regulated substances were previously used, have been recovered from a piece of equipment, and are intended for reclamation or fire suppressant recycling and:

(A) The person selling or distributing the regulated substances certifies in writing to the person purchasing or receiving the regulated substances that they were recovered from a piece of equipment and provides the date of recovery; and

(B) The person purchasing or receiving the regulated substances is an EPA-certified reclaimer, a registered fire suppressant recycler consistent with paragraph (d) of this section, or a registered supplier of regulated substances consistent with paragraph (d).

(iii) The regulated substances were imported consistent with the petition process described in § 84.25;

(iv) The regulated substances were collected for destruction and sent to a destruction facility directly or through an aggregator that is reporting to EPA consistent with § 84.31(c)(5); or

(v) The regulated substances were recovered from a motor vehicle air conditioner (MVAC) or MVAC-like appliance

in accordance with 40 CFR part 82, subpart B and are sold or distributed or offered for sale or distribution by the same person who recovered the regulated substances for use only in MVAC equipment or MVAC-like appliances.

(5) No producer or importer may request certification identifications that would exceed their currently available allowances.

(6) A person who reclaims regulated substances or recycles regulated substances for fire suppression uses may request certification identifications at a level equal to their reported reclamation or recycling for the prior year plus an amount based on the average annual growth in total U.S. reclamation of regulated substances in the prior three years or 10 percent, whichever is higher. If further certification identifications are needed, the reclaimer or recycler must notify EPA 45 days in advance of exceeding their allowed level and request approval to generate additional certification identifications. The request must estimate the additional certification identifications needed for the next six months and provide an explanation for the increased level of reclamation or recycling. The relevant agency official will review the request and adjust the amount of certification identifications for the person as appropriate within 21 days. Additional requests can be submitted throughout the year as needed.

(7) No regulated substance repackager or blender may request certificate identifications unless they have allowances. They may generate QR codes based on the certification identifications associated with the containers they acquire.

(c) *Required Practices.* The following practices are required, unless the person purchasing or receiving the bulk regulated substance is listed in paragraph (b)(4) of this section:

(1) Any person producing, importing, reclaiming, recycling for fire suppression uses, repackaging, selling or distributing, or offering to sell or distribute bulk regulated substances must register with EPA consistent with paragraph (d) of this section.

(2) Any person who imports, sells or distributes, or offers for sale or distribution a container of regulated sub-

stance, reclaimed regulated substance, or recycled regulated substances for fire suppression uses must permanently affix a QR code to the container that documents a valid certification identification using the standards defined by EPA prior to the import, sale or distribution, or offer for sale or distribution of the container. For the purposes of this subpart, examples of when a container of regulated substance or reclaimed regulated substance is imported, sold or distributed, or offered for sale or distribution include the date of importation (consistent with 19 CFR 101.1) and departure from a production, reclamation, fire suppressant recycling, repackaging or filling facility.

(3) At the time of sale or distribution or offer for sale or distribution, a person selling or distributing or offering for sale or distribution a container of regulated substance must ensure there is a valid and legible certification identification on each container of regulated substance, scan the certification identification system to identify a transaction, identify the person receiving the regulated substance, and indicate whether the person receiving the regulated substance is a supplier or final customer.

(4) At the time of sale or distribution, a person taking ownership of a container of regulated substance that is a registered supplier must ensure there is a valid and legible certification identification on each container of regulated substance and scan the certification identification in the certification identification system to identify a transaction.

(d) *Recordkeeping and Reporting—(1) Importers.* Any person importing a container of bulk regulated substance must enter the following information in the certification identification system to generate a QR code and associated certification identification for each container of regulated substance imported: the name or brand the regulated substance is being sold and/or marketed under, the date it was imported, the unique serial number associated with the container, the amount and name of the regulated substance(s) in the container, the name, address, contact person, email address, and phone number of the responsible party

at the facility where the container of regulated substance(s) was filled, and certification that the contents of the cylinder match the substance(s) identified on the label.

(2) *Reclaimers.* Any person filling a container with a reclaimed regulated substance must enter the following information in the certification identification system to generate a QR code and associated certification identification for each container of regulated substance sold or distributed or offered for sale or distribution: the name or brand the regulated substance is being sold and/or marketed under, when the regulated substance was reclaimed and by whom, the date the reclaimed regulated substance was put into a container, the unique serial number associated with the container, the amount and name of the regulated substance(s) in the container, and certification that the purity of the batch was confirmed to meet the specifications in appendix A to 40 CFR part 82, subpart F. If a container is filled with reclaimed and virgin regulated substance(s), the reclaimer must provide the amount of virgin regulated substance included in the container and the certification identification(s) associated with that regulated substance.

(3) *Fire suppressant recyclers.* Any person filling a container with a recycled regulated substance for fire suppression purposes must enter the following information in the certification identification system to generate a QR code and associated certification identification for each container of regulated substance sold or distributed or offered for sale or distribution: the name or brand the regulated substance is being sold and/or marketed under, the date the container was filled and by whom, the unique serial number associated with the container, and the amount and name of the regulated substance(s) in the container. If a container is filled with recycled and virgin regulated substance(s), the recycler must provide the amount of virgin regulated substance included in the container and the certification identification(s) associated with that regulated substance.

(4) *Producers and repackagers.* Anyone who is filling a container, whether for the first time after production or when

transferring regulated substances from one container to one or more smaller or larger containers, must enter information in the certification identification system and generate a QR code for the container(s) of packaged regulated substances sold or distributed or offered for sale or distribution: the name or brand the regulated substance is being sold and/or marketed under, the date the container was filled and by whom, the certification identification(s) associated with the regulated substance being packaged, the unique serial number associated with the container, the amount and name of the regulated substance(s) in the container, the quantity of containers it was packaged in, the size of the containers, and the name, address, contact person, email address, and phone number of the responsible party at the facility where the container(s) were filled.

(5) *Receiving recovered regulated substances.* Any person receiving recovered regulated substances for purposes of reclamation or fire suppressant recycling must keep a copy of the written certification required under paragraph (b)(4)(ii) of this section for five years.

(6) *Certification identification generators registration.* Any person who produces, imports, reclaims, recycles for fire suppression uses, repackages or fills a container of regulated substances, reclaimed regulated substances, or recycled regulated substances for fire suppression uses must register with EPA in the certification identification system at least six months before the date they are subject to the requirement in paragraph (a) of this section. The report must contain the name and address of the company, contact information for the owner of the company, the date(s) of and State(s) in which the company is incorporated and State license identifier(s), the address of each facility that sells or distributes or offers for sale or distribution regulated substances, how the company introduces bulk regulated substances into U.S. commerce, and the categories of final customers the entity sells or distributes regulated substances to. If any of the registration information changes, these reports

must be updated and resubmitted within 60 days of the change.

(7) *Supplier registration.* Any person who sells, distributes, or offers for sale or distribution, bulk regulated substances must register with EPA in the certification identification system at least six months before the date they are subject to the requirement in paragraph (a) of this section. The report must contain the name and address of the company, contact information for the owner of the company, the date(s) of and State(s) in which the company is incorporated and State license identifier(s), the address of each facility that sells or distributes regulated substances, and the categories of final customers the supplier sells or distributes regulated substances to. If any of the registration information changes, these reports must be updated and resubmitted within 60 days of the change.

[86 FR 55208, Oct. 5, 2021]

§ 84.25 Required processes to import regulated substances as feedstocks or for destruction.

(a)(1) *Petition to import regulated substances for use in a process resulting in transformation or destruction.* A person must petition the relevant Agency official for the import of each individual shipment of a regulated substance imported for use in a process resulting in transformation or destruction in order to not expend allowances. A petition is required at least 30 days before the shipment is to arrive at a U.S. port, and must contain the following information:

(i) Name, Harmonized Tariff Schedule code, and quantity in kilograms of each regulated substance to be imported;

(ii) Name and address of the importer, the importer ID number, and the contact person's name, email address, and phone number;

(iii) Name and address of the consignee and the contact person's name, email address, and phone number;

(iv) Source country;

(v) The U.S. port of entry for the import, the expected date of import, and the vessel transporting the material. If at the time of submitting the petition the entity does not know this information, and the entity receives a non-objection notice for the individual shipment in the petition, the entity is required to notify the relevant Agency official of this information prior to the date of importation (consistent with the definition at 19 CFR 101.1) of the individual shipment into the United States;

(vi) Name and address of any intermediary, including a contact person's name, email address and phone number, who will hold the material before the regulated substances are transformed or destroyed;

(vii) Name, address, contact person, email address, and phone number of the responsible party at the facility where the regulated substance will be used in a process resulting in the substance's transformation or destruction;

(viii) An English translation, if needed, of the export license, application for an export license, or official communication acknowledging the export from the appropriate government agency in the country of export;

(ix) The capacity of the container; and

(x) The unique identification number of the container used to transport the regulated substances as part of the petition.

(2) *Review of petition to import for use in a process resulting in transformation or destruction.* (i) The relevant Agency official will initiate a review of the information submitted under paragraph (a)(1) of this section and take action within 21 days to issue either an objection notice or a non-objection notice for the individual shipment to the person who submitted the petition.

(ii) The relevant Agency official may issue an objection notice to a petition for the following reasons:

(A) If the relevant Agency official determines that the information is insufficient; that is, if the petition lacks or appears to lack any of the information required under paragraph (a)(1) of this section or other information that may be requested during the review of the petition necessary to verify that the regulated substance is for use in a process resulting in transformation or destruction;

(B) If the relevant Agency official determines that any portion of the petition contains false, inaccurate, or misleading information, or the official has information from other U.S. or foreign government agencies indicating that the petition contains false, inaccurate, or misleading information.

(iii) Within 10 working days after receipt of an objection notice with the basis being “insufficient information,” the importer may re-petition the relevant Agency official. If no re-petition is taken by the tenth working day after the date on the objection notice, the objection shall become final. Only one re-petition will be accepted for any petition received by EPA.

(iv) Any information contained in the re-petition which is inconsistent with the original petition must be identified and a description of the reason for the inconsistency must accompany the re-petition.

(v) In cases where the relevant Agency official does not object to the petition, the official will issue a non-objection notice.

(vi) If, following EPA’s issuance of a non-objection notice, new information is brought to EPA’s attention which shows that the non-objection notice was issued based on false, inaccurate, or misleading information, then EPA has the right to:

(A) Revoke and void the non-objection notice from the approval date;

(B) Pursue all means to ensure that the regulated substance is not imported into the United States; and

(C) Take appropriate enforcement and apply administrative consequences.

(3) *Timing.* (i) An individual shipment authorized through a non-objection notice must be used in the process resulting in its transformation within one year of import.

(ii) An individual shipment authorized through a non-objection notice must be used in the process resulting in its destruction within 120 days of import.

(4) *Quantity.* An individual shipment authorized through a non-objection notice may not exceed the quantity (in MTEVe) of the regulated substance stated in the non-objection notice.

(b)(1) *Petition to import used regulated substances for disposal by destruction.* A person must petition the relevant Agency official for the import of each individual shipment of a used regulated substance imported for purposes of destruction in order to not expend allowances. A petition is required at least 30 working days before the shipment is to leave the foreign port of export, and contain the following information:

(i) Name, Harmonized Tariff Schedule code, and quantity in kilograms of each regulated substance to be imported;

(ii) Name and address of the importer, the importer ID number, and the contact person’s name, email address, and phone number;

(iii) Name and address of the consignee and the contact person’s name, email address, and phone number;

(iv) Name and address of any intermediary who will hold regulated substances imported for destruction, and the contact person’s name, email address, and phone number;

(v) Source country;

(vi) An English translation, if needed, of the export license (or application for an export license) from the appropriate government agency in the country of export;

(vii) The U.S. port of entry for the import, the expected date of import, and the vessel transporting the material. If at the time of submitting the petition the importer does not know this information, and the importer receives a non-objection notice for the individual shipment in the petition, the importer is required to notify the relevant Agency official of this information prior to the entry of the individual shipment into the United States; and

(viii) Name, address, contact person, email address, and phone number of the responsible party at the destruction facility.

(2) *Review of petition to import for destruction.* (i) The relevant Agency official will initiate a review of the information submitted under paragraph (b)(1) of this section and take action within 30 working days to issue either an objection notice or a non-objection notice for the individual shipment to the person who submitted the petition.

Environmental Protection Agency

§ 84.27

(ii) The relevant Agency official may issue an objection notice to a petition for the following reasons:

(A) If the relevant Agency official determines that the information is insufficient; that is, if the petition lacks or appears to lack any of the information required under paragraph (b)(1) of this section or other information that may be requested during the review of the petition necessary to verify that the regulated substance is used;

(B) If the relevant Agency official determines that any portion of the petition contains false, inaccurate, or misleading information, or the relevant Agency official has information from other U.S. or foreign government agencies indicating that the petition contains false, inaccurate, or misleading information;

(C) If allowing the import of the used regulated substance would run counter to government restrictions from either the country of recovery or export regarding regulated substances;

(D) If destruction capacity is installed or is being installed for that specific regulated substance in the country of recovery or country of export and the capacity is funded in full or in part through the Multilateral Fund to the Montreal Protocol.

(iii) Within 10 working days after receipt of an objection notice with the basis being “insufficient information,” the importer may re-petition the relevant Agency official. If no re-petition is taken by the tenth working day after the date on the objection notice, the objection shall become final. Only one re-petition will be accepted for any petition received by EPA.

(iv) Any information contained in the re-petition that is inconsistent with the original petition must be identified and a description of the reason for the inconsistency must accompany the re-petition.

(v) In cases where the relevant Agency official does not object to the petition, the official will issue a non-objection notice.

(vi) If, following EPA’s issuance of a non-objection notice, new information is brought to EPA’s attention which shows that the non-objection notice was issued based on false, inaccurate, or misleading information, then EPA

and the relevant Agency official has the right to:

(A) Revoke and void the non-objection notice from the approval date;

(B) Pursue all means to ensure that the regulated substance is not imported into the United States; and

(C) Take appropriate enforcement and apply administrative consequences.

(3) *Timing.* An individual shipment authorized through a non-objection notice must be destroyed within 120 days of import.

(4) *Quantity.* An individual shipment authorized through a non-objection notice may not exceed the quantity (in MTEVe) of the regulated substance stated in the non-objection notice.

(5) *Proof of destruction.* For each individual shipment of a used regulated substance imported with the intent to destroy that substance for which EPA issues a non-objection notice, an importer must submit to the Administrator records indicating that the substance has been destroyed with their quarterly reports in § 84.31(c)(1).

(6) *Recordkeeping.* The person receiving the non-objection notice from the relevant Agency official for a petition to import used regulated substances must maintain the following records for five years:

- (i) A copy of the petition;
- (ii) The EPA non-objection notice;
- (iii) The bill of lading for the import;
- (iv) The U.S. Customs entry number;

and

(v) Records demonstrating that the substance has been destroyed in accordance with approved technologies in § 84.29.

[86 FR 55208, Oct. 5, 2021, as amended at 88 FR 46896, July 20, 2023]

§ 84.27 Controlling emissions of HFC-23.

(a) No later than October 1, 2022, as compared to the amount of chemical intentionally produced on a facility line, no more than 0.1 percent of HFC-23 created on the line may be emitted.

(1) *Requests for extension.* The producer may submit a request to the relevant Agency official to request a six-month extension, with a possibility of one additional six-month extension, to meet the 0.1 percent HCFC-23 limit. No

§ 84.29

40 CFR Ch. I (7–1–24 Edition)

entity may have a compliance date later than October 1, 2023.

(2) *Timing of request.* The extension request must be submitted to EPA no later than August 1, 2022, for a first-time extension or February 1, 2023, for a second extension.

(3) *Content of request.* The extension request must contain the following information:

(i) Name of the facility submitting the request, contact information for a person at the facility, and the address of the facility.

(ii) A description of the specific actions the facility has taken to improve their HFC-23 control, capture, and destruction; the facility's plans to meet the 0.1 percent HFC-23 limit including the expected date by which the equipment will be installed and operating; and verification that the facility has met all applicable reporting requirements.

(4) *Review of request.* Starting on the first working day following receipt by the relevant Agency official of a complete request for extension, the relevant Agency official will initiate review of the information submitted under paragraph (a)(3) of this section and take action within 30 working days. Any grant of a compliance deferral by the relevant Agency official will be made public.

(b) Captured HFC-23 is permitted to be destroyed at a different facility than where it is produced. In such instances, HFC-23 emissions during the transportation to and destruction at the different facility will be incorporated into calculations of whether the producer meets the 0.1 percent standard outlined in paragraph (a) of this section.

[86 FR 55208, Oct. 5, 2021]

§ 84.29 Destruction of regulated substances.

(a) The following technologies are approved by the Administrator for destruction of all regulated substances except for HFC-23:

- (1) Cement kiln;
- (2) Gaseous/fume oxidation;
- (3) Liquid injection incineration;
- (4) Porous thermal reactor;
- (5) Reactor cracking;
- (6) Rotary kiln incineration;
- (7) Argon plasma arc;

- (8) Nitrogen plasma arc;
- (9) Portable plasma arc;
- (10) Chemical reaction with hydrogen and carbon dioxide;
- (11) Gas phase catalytic de-halogenation; and
- (12) Superheated steam reactor.

(b) The following technologies are approved by the Administrator for destruction of HFC-23:

- (1) Gaseous/fume oxidation;
- (2) Liquid injection incineration;
- (3) Reactor cracking;
- (4) Rotary kiln incineration;
- (5) Argon plasma arc;
- (6) Nitrogen plasma arc;
- (7) Chemical reaction with hydrogen and carbon dioxide; and
- (8) Superheated steam reactor.

[86 FR 55208, Oct. 5, 2021]

§ 84.31 Recordkeeping and reporting.

(a) *Recordkeeping and reporting.* Any person who produces, imports, exports, transforms, uses as a process agent, destroys, reclaims, or repackages regulated substances or is receiving application-specific allowances in the six applications listed in subsection (e)(4)(B)(iv) of the AIM Act must comply with the following recordkeeping and reporting requirements:

(1) Reports required by this section must be submitted within 45 days of the end of the applicable reporting period, unless otherwise specified.

(2) Reports, petitions, and any related supporting documents must be submitted electronically in a format specified by EPA.

(3) Records and copies of reports required by this section must be retained for five years.

(4) Quantities of regulated substances must be stated in terms of kilograms unless otherwise specified.

(5) Reports are no longer required if an entity notifies the Administrator that they have permanently ceased production, import, export, destruction, transformation, use as a process agent, reclamation, or packaging of regulated substances, but the entity must continue to comply with all applicable recordkeeping requirements.

(b) *Producers.* Persons ("producers") who produce regulated substances must comply with the following recordkeeping and reporting requirements:

(1) *One-time report.* Within 120 days of January 1, 2022, or within 120 days of the date that a producer first produces a regulated substance, whichever is later, every producer must submit to the Administrator a report describing:

(i) The method by which the producer in practice measures daily quantities of regulated substances produced;

(ii) Conversion factors by which the daily records as currently maintained can be converted into kilograms of regulated substances produced, including any constants or assumptions used in making those calculations (*e.g.*, tank specifications, ambient temperature or pressure, density of the regulated substance);

(iii) Internal accounting procedures for determining plant-wide production;

(iv) The quantity of any fugitive losses accounted for in the production figures;

(v) A list of any coproducts, byproducts, or emissions from the production line that are other regulated substances; ozone-depleting substances listed in 40 CFR part 82, subpart A; or hazardous air pollutants initially identified in section 112 of the Clean Air Act, and as revised through rule-making and codified in 40 CFR part 63;

(vi) The estimated percent efficiency of the production process for the regulated substance; and

(vii) A description of any processes that use a regulated substance as a process agent. Within 60 days of any change in the measurement procedures or the information specified in the above report, the producer must submit a report specifying the changes to the relevant Agency official.

(2) *Reporting—producers.* Within 45 days after the end of each quarter, each producer of a regulated substance must provide to the relevant Agency official a report containing the following information for each facility:

(i) The quantity (in kilograms) of production of each regulated substance used in processes resulting in their transformation by the producer; for any regulated substance that is used in processes resulting in their transformation at a facility that differs from the facility of production, but both facilities are owned by the producer, the name, quantity (in kilo-

grams), and recipient facility of each regulated substance; and the quantity (in kilograms) intended for transformation by a second party;

(ii) The quantity (in kilograms) of production of each regulated substance used in processes resulting in their destruction by the producer; for any regulated substance that is used in processes resulting in their destruction at a facility that differs from the facility of production, but both facilities are owned by the producer, the name, quantity (in kilograms), and recipient facility of each regulated substance; and the quantity (in kilograms) intended for destruction by a second party;

(iii) The quantity (in kilograms) of production of each regulated substance used as a process agent by the producer; for any regulated substance that is used as a process agent at a facility that differs from the facility of production, but both facilities are owned by the producer, the name, quantity (in kilograms), and recipient facility of each regulated substance; and the quantity (in kilograms) intended for use as a process agent by a second party;

(iv) The quantity (in exchange value equivalents) of allowances expended for each regulated substance and the quantity (in kilograms) of each regulated substance produced;

(v) The quantity (in kilograms) of regulated substances sold or transferred during the quarter to a person other than the producer for use in processes resulting in their transformation, destruction, or use as a process agent;

(vi) The quantity (in kilograms) of regulated substances produced by the producer that were exported by the producer or by other U.S. companies to a foreign country that will be transformed or destroyed and therefore were produced without expending production or consumption allowances;

(vii) For transformation in the United States or by a person in a foreign country, one copy of a transformation verification from the transformer for the specific regulated substance(s) and a list of additional quantities shipped to that same transformer for the quarter;

(viii) For destruction in the United States or by a person in a foreign country of a regulated substance that was produced without allowances, one copy of a destruction verification for each particular destroyer confirming it destroyed the same regulated substance, and a list of additional quantities shipped to that same destroyer for the quarter;

(ix) A list of the entities conferring application-specific allowances from whom orders were placed, and the quantity (in kilograms) of specific regulated substances produced for those listed applications; and

(x) For the fourth quarter report only, the quantity of each regulated substance held in inventory on December 31.

(3) *Recordkeeping—producers.* Every producer of a regulated substance must maintain the following records:

(i) Dated records of the quantity (in kilograms) of each regulated substance produced at each facility;

(ii) Dated records of the quantity (in kilograms) of regulated substances produced for use in processes that result in their transformation, destruction, or as a process agent;

(iii) Dated records of the quantity (in kilograms) of regulated substances sold for use in processes that result in their transformation, destruction, or as a process agent;

(iv) Dated records of the quantity (in kilograms) of regulated substances produced by expending conferred application-specific allowances and quantity sold for use in each listed application;

(v) Copies of invoices or receipts documenting sale of regulated substances for use in processes that result in their transformation, destruction, or as a process agent;

(vi) Dated records of the quantity (in kilograms) of each regulated substance used at each facility as feedstocks or destroyed in the manufacture of a regulated substance or in the manufacture of any other substance, and any regulated substance introduced into the production process of the same regulated substance at each facility;

(vii) Dated records of the quantity (in kilograms) of each regulated substance used at each facility as a process agent;

(viii) Dated records identifying the quantity (in kilograms) of each coproduct and byproduct chemical not a regulated substance produced within each facility also producing one or more regulated substances;

(ix) Dated records of the quantity (in kilograms) of raw materials and feedstock chemicals used at each facility for the production of regulated substances;

(x) Dated records of the shipments of each regulated substance produced at each plant;

(xi) Dated records of batch tests of regulated substances packaged for sale or distribution, including instrument calibration, sample testing data files, audit trail files, and results summaries of both sample test results and quality control test results that are in a form suitable and readily available for review;

(xii) The quantity (in kilograms) of regulated substances, the date received, and names and addresses of the source of used materials containing regulated substances which are recycled or reclaimed at each plant;

(xiii) Records of the date, the regulated substance, and the estimated quantity of any spill or release of a regulated substance that equals or exceeds 100 pounds;

(xiv) The transformation verification in the case of transformation, or the destruction verification in the case of destruction, showing that the purchaser or recipient of a regulated substance, in the United States or in another foreign country, certifies the intent to either transform or destroy the regulated substance, or sell the regulated substance for transformation or destruction in cases when allowances were not expended; and

(xv) The certifications from application-specific allowance holders stating that the regulated substances were purchased solely for an application listed in § 84.5(c)(2) and will not be resold for use in a different application or used in any other manufacturing process.

(4) *Additional Requirements: producers of HFC-23.* (i) Each producer of HFC-23 must include the following additional information in their one-time report in paragraph (b)(1) of this section:

(A) Information on the capacity to produce the intended chemical on the line on which HFC-23 is produced;

(B) A description of actions taken at the facility to control the generation of HFC-23 and its emissions;

(C) Identification of approved destruction technology and its location intended for use for HFC-23 destruction;

(D) A copy of the destruction removal efficiency report associated with the destruction technology; and

(E) Within 60 days of any change in the information specified in the above report, the producer must submit a report specifying the changes to the relevant Agency official.

(ii) Each producer of HFC-23 must include the following additional information in their fourth quarter report:

(A) Annual facility-level data on HFC-23 (in metric tons) on amounts: Emitted; generated; generated and captured for any purpose; generated and captured for consumptive use; generated and captured for feedstock use in the United States; generated and captured for destruction; used for feedstock without prior capture; and destroyed without prior capture.

(B) [Reserved]

(iii) If captured HFC-23 is destroyed in a subsequent control period, producers must submit records to EPA indicating the HFC-23 has been destroyed in their next quarterly report.

(iv) In developing any required report, each producer of HFC-23 must abide by the following monitoring and quality assurance and control provisions:

(A) To calculate the quantities of HFC-23 generated and captured for any use, generated and captured for destruction, used for feedstock without prior capture, and destroyed without prior capture, facilities shall comply with the monitoring methods and quality assurance and control requirements set forth at 40 CFR 98.414 and the calculation methods set forth at 40 CFR 98.413, except 40 CFR 98.414(p) shall not apply.

(B) To calculate the quantity of HFC-23 emitted, facilities shall comply with the monitoring methods and quality assurance and control requirements set

forth at 40 CFR 98.124 and the calculation methods set forth at 40 CFR 98.123.

(5) *Agency assumption*—For any person who fails to maintain the records required by this paragraph, or to submit the reports required by this paragraph, EPA may assume that the person has produced at full capacity during the period for which records were not kept.

(c) *Importers*. Persons (“importers”) who import regulated substances must comply with the following record-keeping and reporting requirements:

(1) *Reporting—importers*. Within 45 days after the end of each quarter, an importer of record of a regulated substance must submit to the relevant Agency official a report containing the following information:

(i) Summaries of the records required in paragraph (c)(2) of this section for the previous quarter;

(ii) The total quantity (in kilograms) imported of each regulated substance for that quarter;

(iii) The Harmonized Tariff Schedule codes for the regulated substances or blends imported;

(iv) A list of the application-specific allowance holders from whom orders were placed, number of application-specific allowances conferred, and the quantity (in kilograms) of specific regulated substances imported for those listed applications;

(v) The quantity (in kilograms) of regulated substances imported for use in processes resulting in their transformation or destruction;

(vi) The quantity (in kilograms) of regulated substances sold or transferred during that quarter to each person for use in processes resulting in their transformation or destruction;

(vii) The transformation verifications showing that the purchaser or recipient of imported regulated substances intends to transform those substances or destruction verifications showing that the purchaser or recipient intends to destroy the regulated substances;

(viii) Records required under § 84.25(b)(5) documenting proof that material imported for destruction was destroyed; and

(ix) For the fourth quarter report only, the quantity of each regulated

substance held in inventory on December 31.

(2) *Recordkeeping—importers.* An importer of a regulated substance must maintain the following records:

(i) The quantity (in kilograms) of each regulated substance imported, either alone or in mixtures, including the percentage of each mixture that consists of a regulated substance;

(ii) The quantity (in kilograms) of used regulated substances imported for destruction under the process described in § 84.25(b);

(iii) The quantity (in kilograms) of regulated substances imported for use in processes resulting in their transformation or destruction;

(iv) The quantity (in kilograms) of regulated substances imported and sold for use in processes that result in their transformation or destruction;

(v) The date on which the regulated substances were imported;

(vi) The port of entry through which the regulated substances passed;

(vii) The country from which the imported regulated substances were imported;

(viii) The company that produced the imported regulated substances;

(ix) The Harmonized Tariff Schedule code for the regulated substances imported;

(x) The importer number for the shipment;

(xi) A copy of the bill of lading for the import;

(xii) The invoice for the import;

(xiii) The U.S. Customs entry number;

(xiv) Dated records documenting the sale or transfer of regulated substances for use in processes resulting in their transformation or destruction;

(xv) Copies of transformation verifications or destruction verifications indicating that the regulated substances will be transformed or destroyed;

(xvi) Dated records of the quantity of regulated substances imported for an application listed at § 84.5(c)(2);

(xvii) The certifications from application-specific allowance holders stating that the regulated substances were purchased solely for an application listed in § 84.5(c)(2) and will not be resold for use in a different application

or used in any other manufacturing process;

(xviii) Dated records of batch tests of regulated substances packaged for sale or distribution, including instrument calibration, sample testing data files, audit trail files, and results summaries of both sample test results and quality control test results that are in a form suitable and readily available for review; and

(xix) For any entity subject to an order issued by the Department of Commerce that is receiving allowances for 2022 or 2023, documentation of cash deposit of and final payment of the antidumping and countervailing duty for regulated substances imported.

(3) *Transshipments.* (i) A person must notify the relevant Agency official of each shipment of a regulated substance that is to be transhipped through the United States. The notification is required at least 30 working days before the shipment is to leave the foreign port of export for importation into the United States as a transshipment, and must contain the following information:

(A) Name, Harmonized Tariff Schedule code, and quantity in kilograms of each regulated substance to be transhipped;

(B) Name and address of the importer, the importer ID number, and the contact person's name, email address, and phone number;

(C) Source country; and

(D) The U.S. port of entry, the expected date of importation (consistent with the definition at 19 CFR 101.1), and the vessel transporting the material. If at the time of submitting the petition the importer does not know this information, the importer is required to notify the relevant Agency official of this information prior to the entry of each shipment into the United States.

(ii) The person in paragraph (c)(3)(i) of this section must notify the relevant Agency official of each shipment of a regulated substance that has been transhipped when it is exported from the United States. The notification is required at least 10 working days after the shipment is exported from the United States, and must contain the following information:

Environmental Protection Agency

§ 84.31

(A) Name, Harmonized Tariff Schedule code, and quantity in kilograms of each regulated substance to be transhipped;

(B) Name and address of the importer, the importer ID number, and the contact person's name, email address, and phone number; and

(C) Date of departure and name of vessel.

(iii) Any person who tranships a regulated substance must maintain records that indicate:

(A) That the regulated substance shipment originated in a foreign country;

(B) That the regulated substance shipment is destined for another foreign country; and

(C) That the regulated substance shipment will not enter U.S. commerce within the United States.

(4) *Additional recordkeeping requirements—importers of used regulated substances for destruction.* A person receiving a non-objection notice from the relevant Agency official to import used regulated substances for destruction must maintain the following records:

(i) A copy of the petition to import for destruction;

(ii) The EPA non-objection notice;

(iii) A copy of the export license, export license application, or official communication from the appropriate government agency in the country of export;

(iv) An English translation of the document in paragraph (c)(4)(iii) of this section;

(v) U.S. Customs entry documents for the import that must include the Harmonized Tariff Schedule codes;

(vi) The date, amount, and name of the regulated substances sent for destruction, per shipment;

(vii) An invoice from the destruction facility verifying the shipment was received; and

(viii) Records from the destruction facility indicating that the substance has been destroyed.

(5) *Recordkeeping requirements—aggregators.* A person aggregating a regulated substance prior to destruction, regardless of whether the person is an importer, must:

(i) Maintain transactional records that include the name and address of

the entity from whom they received the regulated substance imported for destruction;

(ii) Maintain transactional records that include the name and address of the entity to whom they sent the regulated substance imported for destruction;

(iii) Maintain records that include the date and quantity of the imported regulated substance received for destruction;

(iv) Maintain records that include the date and quantity of the imported regulated substance sent for destruction; and

(v) If the person is the final aggregator of such a regulated substance before the material is destroyed, maintain a copy of records indicating that the substance has been destroyed.

(6) *Recordkeeping requirements—vessel owners/operators.* A person offloading regulated substances recovered from equipment aboard a marine vessel, aircraft, or other aerospace vehicle while in a U.S. port must maintain records of the company name, vessel name or identifier, location of the appliance, date of recovery, person doing the recovery, the amount of regulated substances recovered and type of refrigerant recovered for each servicing event, and the amount of each regulated substance or blend of regulated substances offloaded and the date it was offloaded.

(7) *Additional reporting for importers of record.* The importer of record must include the following no later than 10 days if arriving by marine vessel or 5 days for non-marine vessel prior to the date of importation (consistent with the definition at 19 CFR 101.1), via a U.S. Customs and Border Protection-authorized electronic data interchange system, such as the Automated Broker Interface (authorized agents may permissibly file on behalf of an importer of record):

(i) Cargo Description;

(ii) Net weight;

(iii) Container number(s) associated with the shipment, as applicable;

(iv) Gross Weight;

(v) Weight Unit of Measure;

(vi) Port of Entry;

(vii) Scheduled Entry Date;

(viii) Harmonized Tariff Schedule (HTS) code;

(ix) Harmonized Tariff Schedule (HTS) Description;

(x) Origin Country;

(xi) Importer of Record Name and Associated Number;

(xii) Consignee Entity Name;

(xiii) CAS Number(s) of the regulated substance(s) imported and, for regulated substances that are in a mixture, either the ASHRAE numerical designation of the refrigerant or the percentage of the mixture containing each regulated substance;

(xiv) If importing regulated substances for transformation or destruction, a copy of the non-objection notice issued consistent with § 84.25;

(xv) If importing regulated substances as a transshipment, a copy of the confirmation documenting the entity reported the transshipment consistent with paragraph (c)(3)(i) of this section; and

(xvi) A certificate of analysis, if the certificate of analysis is not physically accompanying the shipment pursuant to § 84.5(b)(1)(v)).

(8) *One-time report—payment of anti-dumping and countervailing duties.* By November 30, 2021, any entity importing regulated substances subject to an antidumping and countervailing duty order issued by the Department of Commerce that is receiving allowances for 2022 or 2023 must provide documentation of cash deposit of and final payment of such duties for the regulated substances imported from January 1, 2017, through May 19, 2021, or provide evidence that those imports were not subject to such duties for those years.

(9) *Importer of record information.* (i) Any entity that falls under any of the following criteria must submit the information outlined in paragraph (c)(9)(ii) of this section:

(A) That is issued allowances by EPA and anticipates being the importer of record for a shipment of regulated substances; or

(B) That is not issued allowances by EPA, but receives transferred or conferred allowances.

(ii) The following information must be submitted to EPA by the date speci-

fied under paragraph (c)(9)(iii) of this section:

(A) Names of all subsidiaries;

(B) Entities commonly owned or majority owned by the same person or persons;

(C) Alternative names under which the entity does business;

(D) Importer of record numbers; and

(E) If providing information under paragraph (c)(9)(ii) (A), (B), or (C) of this section:

(1) The relationship between the allowance holder and each subsidiary and each entity commonly owned or majority owned by the same person or persons, including alternative names under which each listed entity does business; and

(2) If applicable, the identity of owners and their respective percentage of ownership.

(iii) The information outlined in paragraph (c)(9)(ii) of this section must be submitted each year by:

(A) November 15 after being issued allowances for an entity that falls under paragraph (c)(9)(i)(A) of this section; or

(B) within 15 calendar days of receiving a non-objection notice for conferral of application-specific allowances pursuant to § 84.13(h) or for inter-company transfer of consumption allowances pursuant to § 84.19(a) for an entity that falls under paragraph (c)(9)(i)(B) of this section.

(iv) If changes occur to the information previously provided to the Agency, such changes must be transmitted to the Agency at least 21 days prior to expenditure of allowances pursuant to § 84.5(b)(1)(i).

(d) *Exporters.* Persons (“exporters”) who export regulated substances must comply with the following reporting requirements:

(1) *Reporting requirements—exporters.* Within 45 days after the end of each quarter, each exporter of a regulated substance must submit to the relevant Agency official a report containing the following information if such information was not already reported under paragraph (b)(2) of this section:

(i) The names and addresses of the exporter and the recipient of the exports;

(ii) The exporter’s Employer Identification Number;

(iii) The quantity of each specific regulated substance exported, including the quantity of regulated substance that is used, reclaimed, or recycled;

(iv) The date on which, and the port from which, the regulated substances were exported from the United States or its territories;

(v) The country to which the regulated substances were exported;

(vi) The Harmonized Tariff Schedule codes for the regulated substances shipped;

(vii) For persons exporting for transformation or destruction of the regulated substance, the invoice or sales agreement containing language similar to the transformation verifications that importers use, or destruction verifications showing that the purchaser or recipient intends to destroy the regulated substances; and

(viii) For the fourth quarter report only, the quantity of each regulated substance held in inventory on December 31.

(2) *Recordkeeping.* (i) Exporters must maintain dated records of batch tests of regulated substances packaged for sale or distribution, including instrument calibration, sample testing data files, audit trail files, and results summaries of both sample test results and quality control test results that are in a form suitable and readily available for review.

(ii) [Reserved]

(3) *Used regulated substances.* Any exporter of used regulated substances must indicate on the bill of lading or invoice that the regulated substance is used.

(e) *Second-party transformation and destruction.* Any person who transforms or destroys regulated substances produced or imported by another person must comply with the following recordkeeping and reporting requirements:

(1) *Reporting—second-party transformation and destruction.* Any person who transforms or destroys regulated substances produced or imported by another person must report the following for each facility:

(i) The names and quantities (in kilograms) of the regulated substances transformed for each calendar year within 45 days after the end of that year; and

(ii) The names and quantities (in kilograms) of the regulated substances destroyed for each calendar year within 45 days after the end of that year.

(2) *Recordkeeping—second-party transformation and destruction.* Any person who transforms or destroys regulated substances produced or imported by another person must maintain the following:

(i) Copies of the invoices or receipts documenting the sale or transfer of the regulated substances to the person;

(ii) Records identifying the producer or importer of the regulated substances received by the person;

(iii) Dated records of inventories of regulated substances at each plant on the first day of each quarter;

(iv) Dated records of the quantity (in kilograms) of each regulated substance transformed or destroyed;

(v) In the case where regulated substances were purchased or transferred for transformation purposes, a copy of the person's transformation verification;

(vi) Dated records of the names, commercial use, and quantities (in kilograms) of the resulting chemical(s) when the regulated substances are transformed;

(vii) Dated records of shipments to purchasers of the resulting chemical(s) when the regulated substances are transformed; and

(viii) In the case where regulated substances were purchased or transferred for destruction purposes, a copy of the person's destruction verification.

(3) *Transformation verifications.* Any person who purchases regulated substances for purposes of transformation must provide the producer or importer of the regulated substances with a transformation verification that the regulated substances are to be used in processes that result in their transformation. The verification can only be valid for one year. The transformation verification shall include the following:

(i) Identity and address of the person intending to transform the regulated substances;

(ii) The quantity (in kilograms) of regulated substances intended for transformation;

(iii) Identity of shipments by purchase order number(s), purchaser account number(s), location(s), or other means of identification;

(iv) Period of time over which the person intends to transform the regulated substances; and

(v) Signature and title of the verifying person.

(4) *Destruction verifications.* Any person who purchases or receives regulated substances in processes that result in their destruction shall provide the producer or importer of the regulated substances with a destruction verification that the regulated substances are to be used in processes that result in their destruction. The verification can only be valid for up to 120 days. The destruction verification shall include the following:

(i) Identity and address of the person intending to destroy regulated substances;

(ii) The quantity (in kilograms) of regulated substances intended for destruction;

(iii) Identity of shipments by purchase order number(s), purchaser account number(s), location(s), or other means of identification;

(iv) The destruction efficiency at which such substances will be destroyed;

(v) Period of time over which the person intends to destroy regulated substances; and

(vi) Signature and title of the verifying person.

(5) *Transformation reporting—one-time report.* Within 120 days of January 1, 2022, or within 120 days of the date that an entity first transforms a regulated substance, whichever is later, any person who transforms a regulated substance must provide EPA with a one-time report containing the following information:

(i) A description of the transformation use;

(ii) A description of all technologies and actions taken to minimize emissions of regulated substances;

(iii) The name of the product manufactured in the process;

(iv) A list of any coproducts, byproducts, or emissions from the line on which the regulated substance is to be transformed that are other regulated

substances; ozone-depleting substances listed in 40 CFR part 82, subpart A; or hazardous air pollutants initially identified in section 112 of the Clean Air Act, and as revised through rule-making and codified in 40 CFR part 63;

(v) The estimated annual fugitive emissions by chemical associated with the transformation process;

(vi) The anticipated ratio of regulated substance used for transformation to the amount of end product manufactured; and

(vii) A mass balance equation of the transformation reaction.

(f) *All destruction facilities—(1) Destruction—one-time report.* Within 120 days of January 1, 2022, or within 120 days of the date that an entity first destroys a regulated substance, whichever is later, every person who destroys regulated substances, whether in a process for destruction or for disposal of a used substance, shall provide EPA with a report containing the following information:

(i) The destruction unit's destruction efficiency;

(ii) The methods used to determine destruction efficiency;

(iii) The methods used to record the volume destroyed;

(iv) The name of other relevant federal or state regulations that may apply to the destruction process; and

(v) Any changes to the information in this paragraph must be reflected in a revision to be submitted to EPA within 60 days of the change(s).

(2) *Proof of destruction.* Any person who destroys used regulated substances for disposal of that substance, shall provide the importer or aggregator with a record indicating the substance was destroyed within 30 days of the date of destruction.

(g) *Process agents—(1) Reporting—one-time report.* Within 120 days of January 1, 2022, or within 120 days of the date that an entity first uses a regulated substance as a process agent, whichever is later, any person who uses a regulated substance as a process agent must provide EPA a one-time report containing the following information:

(i) A description of the process agent use that includes details of the percentages of process agent retained within the process, recovered after the

process, and emitted or entrained in the final product;

(ii) A description of all technologies and actions taken to minimize emissions of regulated substances;

(iii) The name of the product and byproducts manufactured in the process; and

(iv) The anticipated ratio of process agent emissions to end product manufactured.

(2) *Annual report.* Any person who uses a regulated substance as a process agent must provide an annual report containing the following information:

(i) Contact information including email address and phone number for a primary and alternate contact person;

(ii) The amount of regulated substance used as a process agent;

(iii) The amount of product and the amount of byproducts manufactured (including amounts eventually destroyed or used as feedstock);

(iv) The stack point source emissions; and

(v) A description of any regulated substance emission reduction actions planned or currently under investigation.

(h) *Holders of application-specific allowances.*

(1) *Reporting.* Any person allocated application-specific allowances, except for persons receiving application-specific allowances for mission-critical military end uses, must submit to the relevant Agency official a report by July 31 (covering prior activity from January 1 through June 30) and January 31 (covering prior activity from July 1 through December 31) of each year. The report shall contain the following information:

(i) The quantity (in kilograms) of regulated substances acquired through conferring allowances during the previous six months;

(ii) The quantity (in kilograms) of regulated substances acquired through expending allowances and directly imported during the previous six months;

(iii) The quantity (in kilograms) of regulated substances purchased for application-specific use without expending application-specific allowances during the previous six months (*i.e.*, from the open market);

(iv) The quantity (in kilograms) of inventory on the last day of the previous six-month period of each regulated substance for application-specific use held by the reporting company or held under contract by another company for the reporting company's use;

(v) The quantity (in kilograms) of each regulated substance for application-specific use that was destroyed or recycled during the previous six months;

(vi) The names and contact information of each company to which application-specific allowances were conferred, and the quantity of allowances conferred from each company, and the quantity of regulated substances received from each company;

(vii) In the July 31 report only, a description of plans to transition application-specific use of regulated substances to regulated substances with a lower exchange value or alternatives to regulated substances;

(viii) In the July 31 report only, if a company is requesting additional allowances due to one or more of the circumstances listed in § 84.13(b)(1), the report must include a projection of the monthly quantity of additional regulated substances needed for application-specific use(s) by month in the next calendar year and a detailed explanation, including relevant supporting documentation to justify the additional need; and

(ix) In the July 31 report only, if a company is contracting out the manufacturing of defense sprays or metered dose inhalers, or paying another person (whether it is in cash, credit, goods, or services) to perform the servicing of onboard aerospace fire suppression, the name, address, and email address for a representative of the person doing the manufacturing or servicing, and clarification on whether the responses in paragraph (h)(1) of this section apply to the company that is allocated application-specific allowances or the company receiving the contract for manufacturing and/or servicing using application-specific allowances.

(2) *New Requests.* Persons requesting application-specific allowances for the first time must submit to EPA the following information:

(i) A description of the use of regulated substances and a detailed explanation of how the use is an application-specific use listed in §84.13(a);

(ii) Total quantity (in kilograms) of all regulated substances acquired for application-specific use in the previous three years, including a copy of the sales records, invoices, or other records documenting that quantity;

(iii) The name of the entity or entities supplying regulated substances for application-specific use and contact information for those suppliers;

(iv) The quantities (in kilograms) of regulated substances held in inventory for application-specific use as of June 30 of the prior year and June 30 in the current year;

(v) A description of plans to transition to regulated substances with a lower exchange value or alternatives to regulated substances;

(vi) If a company is requesting additional allowances due to one or more of the circumstances listed in §84.13(b)(1), the report must include a projection of the monthly quantity of additional regulated substances needed by month in the next calendar year and a detailed explanation, including relevant supporting documentation to justify the additional need; and

(vii) If a company is contracting out the manufacturing of defense sprays or metered dose inhalers, or contracting out the servicing of onboard aerospace fire suppression, the name, address, and email address for a representative of the person doing the manufacturing or servicing, and clarification on whether the responses in paragraph (h)(2) of this section apply to the company that is requesting application-specific allowances or the company receiving the contract for manufacturing and/or servicing using application-specific allowances.

(3) *Report for Application-specific Allowances for Mission-critical Military End Use.* The Department of Defense must provide a report to EPA biannually by July 31 (covering prior activity from January 1 through June 30) and January 31 (covering prior activity from July 1 through December 31) of each year contains the following information:

(i) The quantity (in kilograms) of each regulated substance acquired for application-specific use by conferring application-specific allowances;

(ii) The quantity of inventory on June 30 of each regulated substance for application-specific use held by the Department of Defense or held under contract by another company for use by the Department of Defense;

(iii) The quantity of each regulated substance requested for mission-critical military end uses in the next calendar year;

(iv) The broad sectors of use covered by current mission-critical military end uses in the next calendar year; and

(v) A description of plans to transition application-specific use(s) to regulated substances with a lower exchange value or alternatives to regulated substances, including not-in-kind substitutes.

(4) *Conferral of allowances.* Entities who confer application-specific allowances, except for the conferral of allowances for mission-critical military end uses, must submit the following information about each conferral to the relevant Agency official prior to conferring allowances:

(i) The identities and addresses of the conferrer and the conferee;

(ii) The names, telephone numbers, and email addresses of contact persons for the conferrer and the conferee;

(iii) The specific application for which application-specific allowances are to be conferred;

(iv) The quantity (in MTEVe) of application-specific allowances being conferred;

(v) The amount of unexpended application-specific allowances of the type and for the year being conferred that the conferrer holds under authority of this subpart as of the date the claim is submitted to EPA; and

(vi) A certification from the conferrer and the conferee stating that the regulated substances being acquired, produced, or imported are solely for an application listed in §84.5(c)(2) and will not be resold for use in a different application or used in any other manufacturing process.

(5) *Confirmation of conferral.* If the conferrer has sufficient application-specific allowances for the conferral,

the conferral will occur and the relevant Agency official will issue a confirmation notice to both the conferrer and conferee documenting the conferral occurred. The relevant agency official will reduce the conferrer's balance of unexpended allowances by the quantity conferred. However, if EPA ultimately finds that the conferrer did not have sufficient unexpended allowances to cover the conferral or that the regulated substances produced or imported with conferred allowances are used for anything other than the specific application identified in the conferee's submittal and for the application those allowances were allocated for, the conferrer and conferee will be liable for any violations of the regulations of this subpart that occur as a result of, or in conjunction with, the improper conferral.

(6) *Recordkeeping.* Entities who receive via allocation, transfer, or conferral of application-specific allowances, except for mission-critical military end uses, must maintain the following records for five years:

(i) Records necessary to develop the biannual reports;

(ii) A copy of certifications provided to entities when conferring and transferring allowances for application-specific use;

(iii) A copy of confirmation notices when conferring allowances for application-specific use;

(iv) A copy of the annual submission requesting application-specific allowances;

(v) Invoices and order records related to the purchase of regulated substances;

(vi) Records related to the transfer and conferral of application-specific allowances to other entities; and

(vii) Records documenting how regulated substances acquired with application-specific allowances were used.

(7) *Recordkeeping—Mission-Critical Military End Uses.* The Department of Defense must maintain the following records:

(i) Records necessary to develop the annual report;

(ii) A copy of certifications provided to entities when conferring allowances for application-specific use;

(iii) Invoices and order records related to the purchase of regulated substances;

(iv) Records documenting the conferral(s) of application-specific allowances to other entities up to and including the producer and or importer of the chemical;

(v) Records documenting the transfer of regulated substances to an agent or unit of the Department of Defense where the regulated substance will be used for mission-critical applications; and

(vi) Copies of current and historical plans prescribed by the Office of the Secretary of Defense documenting internal Department of Defense monitoring and review procedures for accuracy.

(i) *Reclaimers.* Persons ("reclaimers") who reclaim regulated substances must comply with the following recordkeeping and reporting requirements:

(1) *One-time report.* By February 14, 2022, any person who reclaims a regulated substance must provide a one-time report containing the following information:

(i) The quantity of each regulated substance held in inventory as of December 31, 2021, broken out by whether the regulated substance is recovered, reclaimed, and virgin;

(ii) The name of the laboratory that conducts batch testing and a signed statement from that laboratory confirming there is an ongoing business relationship with the reclaimer;

(iii) The number of batches tested for each regulated substance or blend containing a regulated substance in the prior year; and

(iv) The number of batches that did not meet the specifications in appendix A to 40 CFR part 82, subpart F in the prior year.

(2) *Quarterly Reporting.* Within 45 days after the end of each quarter, each reclaimer of a regulated substance must submit to the relevant Agency official a report containing the quantity of material (the combined mass of regulated substance and contaminants) by regulated substance sent to them for reclamation, the total mass of each regulated substance, and the total mass of waste products.

(3) *Annual Reporting.* Within 45 days after the end of the fourth quarter, each reclaimer of a regulated substance must submit to the relevant Agency official a report containing the quantity of each regulated substance held in inventory onsite as of December 31 broken out by whether the regulated substance is recovered, reclaimed, and virgin.

(4) *Recordkeeping.* (i) Reclaimers must maintain records, by batch, of the results of the analysis conducted to verify that reclaimed regulated substance meets the necessary specifications in appendix A to 40 CFR part 82, subpart F (based on AHRI Standard 700–2016), including instrument calibration, sample testing data files, audit trail files, and results summaries of both sample test results and quality control test results that are in a form suitable and readily available for review. Such records must be maintained for five years.

(ii) Reclaimers must maintain records of the names and addresses of persons sending them material for reclamation and the quantity of the material (the combined mass of regulated substance and contaminants) by regulated substance sent to them for reclamation. Such records must be maintained on a transactional basis for five years.

(j) *Fire suppressant recycling.* Persons (“recycler”) who recycle regulated substances used as a fire suppressant must comply with the following recordkeeping and reporting requirements:

(1) *Quarterly Reporting.* Within 45 days after the end of each quarter, each recycler of a regulated substance used as a fire suppressant must submit to the relevant Agency official a report containing the quantity of material (the combined mass of regulated substance and contaminants) by regulated substance sent to them for recycling, the total mass of each regulated substance recycled, and the total mass of waste products.

(2) *Annual Reporting.* Within 45 days after the end of the fourth quarter, each recycler of a regulated substance used as a fire suppressant must submit to the relevant Agency official a report containing the quantity of each regulated substance held in inventory on-

site broken out by recovered, recycled, and virgin.

(3) *Recordkeeping.* (i) Recyclers must maintain records of the names and addresses of persons sending them material for recycling and the quantity of the material (the combined mass of regulated substance and contaminants) by regulated substance sent to them for recycling. Such records must be maintained on a transactional basis for five years.

(ii) Recyclers must maintain dated records of batch tests of regulated substances packaged for sale or distribution, including instrument calibration, sample testing data files, audit trail files, and results summaries of both sample test results and quality control test results that are in a form suitable and readily available for review.

(k) *Repackagers.* Persons who transfer regulated substances, either alone or in a blend from one container to another container prior to sale or distribution or offer for sale or distribution must comply with the following recordkeeping requirements:

(1) *Recordkeeping.* Repackagers must maintain dated records of batch tests of regulated substances packaged for sale or distribution, including instrument calibration, sample testing data files, audit trail files, and results summaries of both sample test results and quality control test results that are in a form suitable and readily available for review.

(2) [Reserved]

(1) *Treatment of Data submitted under 40 CFR part 84.* (1) Except as otherwise provided in paragraph (i) of this section, 40 CFR 2.201 through 2.215 and 2.301 do not apply to data submitted under this part that EPA has determined through rulemaking to be either of the following:

(i) Emission data, as defined in 40 CFR 2.301(a)(2), determined in accordance with section 114(c) and 307(d) of the Clean Air Act; or

(ii) Data not otherwise entitled to confidential treatment.

(2) Except as otherwise provided in paragraph (k)(4) of this section, 40 CFR 2.201 through 2.208 and 2.301(c) and (d) do not apply to data submitted under this part that EPA has determined through rulemaking to be entitled to

confidential treatment. EPA shall treat that information as confidential in accordance with the provisions of 40 CFR 2.211, subject to paragraph (h)(4) of this section and 40 CFR 2.209.

(3) Upon receiving a request under 5 U.S.C. 552 for data submitted under this part that EPA has determined through rulemaking to be entitled to confidential treatment, the relevant Agency official shall furnish the requestor a notice that the information has been determined to be entitled to confidential treatment and that the request is therefore denied. The notice shall include or cite to the appropriate EPA determination.

(4) A determination made through rulemaking that information submitted under this part is entitled to confidential treatment shall continue in effect unless, subsequent to the confidentiality determination through rulemaking, EPA takes one of the following actions:

(i) EPA determines through a subsequent rulemaking that the information is emission data or data not otherwise entitled to confidential treatment; or

(ii) The Office of General Counsel issues a final determination, based on the requirements of 5 U.S.C. 552(b)(4), stating that the information is no longer entitled to confidential treatment because of change in the applicable law or newly discovered or changed facts. Prior to making such final determination, EPA shall afford the business an opportunity to submit comments on pertinent issues in the manner described by 40 CFR 2.204(e) and 2.205(b). If, after consideration of any timely comments submitted by the business, the Office of General Counsel makes a revised final determination that the information is not entitled to confidential treatment, the relevant agency official will notify the business in accordance with the procedures described in 40 CFR 2.205(f)(2).

[86 FR 55201, 55215, Oct. 5, 2021, as amended at 88 FR 46896, July 20, 2023]

§ 84.33 Auditing of recordkeeping and reporting.

(a) Any person producing, importing, exporting, reclaiming, or recycling for fire suppression a regulated substance, as well as any person receiving applica-

tion-specific allowances, must arrange for annual third-party auditing of reports submitted to EPA except for persons receiving application-specific allowances for mission-critical military end uses.

(b) For producers, importers, and exporters, auditors must review the inputs the regulated entities used to develop quarterly and annual reports including:

(1) The amount of production and consumption allowances allocated;

(2) The amount, timing, and parties to allowance transfers, and the associated documentation and offset amount;

(3) Records documenting the amount of regulated substances imported, exported, produced, and destroyed, transformed, or sent to another entity for such purpose;

(4) Records documenting any application-specific allowances allocated or conferred from other companies, including the amounts of allowances conferred, regulated substances purchased and/or sold, the specific application for which the regulated substances were provided, and the names, telephone numbers, and email addresses for contact persons for the recipient companies;

(5) The date and the port from which regulated substances were imported or exported;

(6) A copy of the bill of lading and the invoice indicating the quantity of regulated substances imported or exported;

(7) Relevant Harmonized Tariff Schedule codes;

(8) The number and type of railcars, ISO tanks, individual cylinders, drums, small cans, or other containers used to store and transport regulated substances;

(9) The inventory of regulated substances as of the end of the prior calendar year;

(10) A random sample (5 percent or 10, whichever is higher) of batch testing results;

(11) A random sample (5 percent or 10, whichever is higher) of certification identifications requested and generated and where associated regulated substances are sold and distributed; and

(12) All other reports submitted to EPA under this subpart.

(c) For companies issued application-specific allowances by EPA, auditors must review the following:

(1) Records documenting the amount of application-specific allowances allocated;

(2) The amount, timing, and parties to allowance transfers, and the associated documentation and offset amount;

(3) Records documenting any application-specific allowances conferred to or from other companies, including the amounts of allowances conferred, regulated substances purchased, the specific application for which the regulated substances were provided, and the names, telephone numbers, and email addresses for contact persons for the recipient companies;

(4) Records documenting the total amount of regulated substances purchased for the application-specific end use, and the amount of regulated substances sold to another company for application-specific use;

(5) Inventory of regulated substances at the end of the calendar year; and

(6) All other reports submitted to EPA under this subpart.

(d) For reclaimers and fire suppressant recyclers, auditors must review the following:

(1) The quantity of regulated substances received for reclamation or recycling;

(2) A random sample (5 percent or 10, whichever is higher) of records documenting the names and addresses of persons sending them material and the quantity of the material, measured in the combined mass of refrigerant and contaminants, by regulated substance to them;

(3) Records documenting the quantity of regulated substances reclaimed;

(4) A random sample (5 percent or 10, whichever is higher) of certification identifications requested and generated and where the associated regulated substances are sold and distributed; and

(5) All other reports submitted to EPA under this subpart.

(e) An auditor must meet the following requirements:

(1) The auditor must be a certified public accountant, or firm of such accountants, that is independent of the regulated person. Such an auditor must

comply with the requirements for professional conduct, including the independence requirements, and the quality control requirements in 40 CFR 1090.1800(b)(1)(ii), as well as applicable rules of state boards of public accountancy. Such an auditor must also meet the requirements to perform an attestation engagement in 40 CFR 1090.1800(b)(1)(ii).

(2) The auditor must meet the independence requirements in paragraph (f) of this section.

(3) Any auditor suspended or debarred under 2 CFR part 1532 or 48 CFR part 9, subpart 9.4, is not qualified to perform attestation engagements under this section.

(f) All reports required under this paragraph must be signed and certified as meeting all the applicable requirements of this subpart by the independent third-party auditor. The auditor must:

(1) Attest that the information in the audit report is accurate;

(2) Attest that the company submitted all required reports to the Agency or specify which reports are missing and provide an assessment on whether missing reports should have been submitted; and

(3) Obtain a signed statement from a responsible corporate officer that all reports submitted to the EPA for the prior calendar year are complete and accurate.

(g) The following provisions apply to each audit performed under this section:

(1) The auditor must prepare a report identifying the applicable procedures specified in this section along with the auditor's corresponding findings for each procedure. The auditor must submit the report electronically to EPA by May 31 of the year following the compliance period.

(2) The auditor must identify any instances where compared values do not agree or where specified values do not meet applicable requirements under this part.

(3) Laboratory analysis refers to the original test result for each analysis of a product's properties.

(4) For a reclaimer that relies on a third-party laboratory for batch testing, the laboratory analysis consists of

Environmental Protection Agency

§ 84.37

the results provided by the third-party laboratory.

(h) The independent third party, their contractors, subcontractors, and their organizations must be independent of the regulated party. All the criteria listed in paragraph (a) of this section must be met by each person involved in the specified activities in this section that the independent third party is hired to perform for a regulated party.

(1) *Employment criteria.* No person employed by an independent third party, including contractor and subcontractor personnel, who is involved in a specified activity performed by the independent third party under the provisions of this section, may be employed, currently or previously, by the regulated party for any duration within the 12 months preceding the date when the regulated party hired the independent third party to provide services under this section.

(2) *Financial criteria.* (i) The third-party's personnel, the third-party's organization, or any organization or individual that may be contracted or subcontracted by the third party must meet all the following requirements:

(A) Have received no more than one-quarter of their revenue from the regulated party during the year prior to the date of hire of the third party by the regulated party for any purpose.

(B) Have no interest in the regulated party's business. Income received from the third party to perform specified activities under this section is excepted.

(C) Not receive compensation for any specified activity in this section that is dependent on the outcome of the specified activity.

(ii) The regulated party must be free from any interest in the third-party's business.

(iii) [Reserved]

(iv) Department of Defense data and reports for application-specific allowances for mission-critical military end uses shall be subject to internal Department of Defense monitoring and review for accuracy as prescribed by the Office of the Secretary of Defense. The results of this review shall be reported electronically to EPA by May 31

of the year following the compliance period.

[86 FR 55221, Oct. 5, 2021]

§ 84.35 Administrative consequences.

(a) The relevant agency official may retire, revoke, or withhold the allocation of allowances, or ban a company from receiving future allowance allocations, using the process outlined in paragraph (b) of this section. Applying an administrative consequence to retire, revoke, or withhold allocation of allowances does not, in any way, limit the ability of the United States to exercise any other authority to bring an enforcement action under any applicable law or regulation.

(b) The relevant agency official will provide a company notice if the Agency intends to retire, revoke, or withhold allocation of allowances, or ban the company from receiving future allowance allocations. The notice will specify the conduct leading to the administrative consequence and what the consequence will be. The relevant agency official will provide such notice no less than 30 days before the impending consequence.

(1) After the relevant agency official provides notice of an impending administrative consequence, the company for which such consequence is pending may not expend, transfer, or confer any allowances.

(2) Any company receiving such a notification may provide information or data to EPA on why the administrative consequence should not be taken within 14 days of the date of the EPA's notice.

(3) If EPA does not receive a response within 14 days of the date of the Agency notice of impending administrative consequence, the administrative consequences will be effective on the date specified in the notice.

[86 FR 55221, Oct. 5, 2021]

§ 84.37 Incorporation by reference.

Certain material is incorporated by reference into this part with the approval of the Director of the Federal Register under 5 U.S.C. 552(a) and 1 CFR part 51. All approved incorporation by reference (IBR) material is available for inspection at EPA and at

§ 84.37, Nt.

the National Archives and Records Administration (NARA). Contact EPA at: U.S. EPA's Air and Radiation Docket; EPA West Building, Room 3334, 1301 Constitution Ave. NW, Washington, DC, 202-566-1742. For information on the availability of this material at NARA, visit www.archives.gov/federal-register/cfr/ibr-locations.html or email fr.inspection@nara.gov. The material also may be obtained from the following sources.

(a) Air-Conditioning, Heating, and Refrigeration Institute (AHRI), 2311 Wilson Boulevard, Suite 400, Arlington, VA 22201; phone: 703.524.8800; website: www.ahrinet.org.

(1) 2008 Appendix C to AHRI Standard 700-2014, 2008 Appendix C for Analytical Procedures for AHRI Standard 700-2014—Normative, copyright 2008; into § 84.5(i).

(2) [Reserved]

(b) ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428; phone: 610.832.9500; email: service@astm.org; website: www.astm.org/.

(1) ASTM D6064-11 (reapproved 2022), Standard Specification for HFC-227ea, 1,1,1,2,3,3,3-Heptafluoropropane (CF₃CH₂CF₃), approved November 1, 2022; IBR approved for § 84.5(i).

(2) ASTM D6231/D6231M-21, Standard Specification for HFC-125 (Pentafluoroethane, C₂H₂F₅), approved June 1, 2021; IBR approved for § 84.5(i).

(3) ASTM D6541-21, Standard Specification for HFC-236fa, 1,1,1,3,3,3-Hexafluoropropane, (CF₃CH₂CF₃), approved June 1, 2021; IBR approved for § 84.5(i).

(4) ASTM D6806-02 (reapproved 2022), Standard Practice for Analysis of Halogenated Organic Solvents and Their Admixtures by Gas Chromatography, approved May 1, 2022; IBR approved for § 84.5(i).

[88 FR 46898, July 20, 2023]

EFFECTIVE DATE NOTE: At 88 FR 46898, July 20, 2023, § 84.37 was amended by adding paragraphs (a)(2) and (3) and (c), effective Oct. 1, 2024. For the convenience of the user, the added text is set forth as follows:

§ 84.37 Incorporation by Reference.

* * * * *

(a) * * *

40 CFR Ch. I (7-1-24 Edition)

(2) AHRI RTL OM December 2019, Refrigerant Testing Laboratory Certification Program Operations Manual, copyright 2019; IBR approved for § 84.3.

(3) AHRI General OM—January 2023, General Operations Manual, copyright 2022; IBR approved for § 84.3.

* * * * *

(c) International Organization for Standardization (ISO), Chemin de Blandonnet 8, CP 401—1214 Vernier, Geneva, Switzerland; tel.: + 41 22 749 01 11; fax: + 41 22 733 34 30; email: central@iso.org; website: www.iso.org.

(1) ISO/IEC 17025:2017(E), "General requirements for the competence of testing and calibration laboratories", Third Edition, published November 2017; IBR approved for § 84.3.

(2) [Reserved]

Subpart B—Restrictions on the Use of Hydrofluorocarbons

SOURCE: At 88 FR 73205, Oct. 24, 2023, unless otherwise noted.

§ 84.50 Purpose.

The purpose of the regulations in this subpart is to implement subsection (i) of 42 U.S.C. 7675, with respect to establishing restrictions on the use of a regulated substance in the sector or subsector in which the regulated substance is used, and to provide requirements associated with the submission of petitions seeking such restrictions.

§ 84.52 Definitions.

For the terms not defined in this subpart but that are defined in § 84.3, the definitions in § 84.3 shall apply. For the purposes of this subpart:

Blend containing a regulated substance means any mixture that contains one or more regulated substances.

Export means the transport of a product or specified component using a regulated substance from inside the United States or its territories to persons outside the United States or its territories, excluding United States military bases and ships for onboard use.

Exporter means the person who contracts to sell any product or specified component using a regulated substance for export or transfers a product or specified component using a regulated

substance to an affiliate in another country.

Importer means any person who imports any product or specified component using or intended for use with a regulated substance into the United States. Importer includes the person primarily liable for the payment of any duties on the merchandise or an authorized agent acting on his or her behalf. The term also includes:

- (1) The consignee;
- (2) The importer of record;
- (3) The actual owner; or
- (4) The transferee, if the right to withdraw merchandise from a bonded warehouse has been transferred.

Install means to complete a field-assembled system's circuit, including charging with a full charge, such that the system can function and is ready for use for its intended purpose.

Manufacture means to complete the manufacturing and assembly processes of a product or specified component such that it is ready for initial sale, distribution, or operation.

Product means an item or category of items manufactured from raw or recycled materials which performs a function or task and is functional upon completion of manufacturing. The term includes, but is not limited to: appliances, foams, fully formulated polyols, self-contained fire suppression devices, aerosols, pressurized dispensers, and wipes.

Retrofit means to upgrade existing equipment where the regulated substance is changed, which—

- (1) Includes the conversion of equipment to achieve system compatibility; and
- (2) May include changes in lubricants, gaskets, filters, driers, valves, o-rings, or equipment components for that purpose. Examples of equipment subject to retrofit include air-conditioning and refrigeration appliances, fire suppression systems, and foam blowing equipment.

Sector means a broad category of applications including but not limited to: refrigeration, air conditioning and heat pumps; foams; aerosols; chemical manufacturing; cleaning solvents; fire suppression and explosion protection; and semiconductor manufacturing.

Specified component for purposes of equipment in the refrigeration, air conditioning, and heat pump sector means condensing units, condensers, compressors, evaporator units, and evaporators.

Subsector means processes, classes of applications, or specific uses that are related to one another within a single sector or subsector.

Substitute means any substance, blend, or alternative manufacturing process, whether existing or new, that may be used, or is intended for use, in a sector or subsector with a restriction on the use of regulated substances and that has a lower global warming potential than the GWP limit or restricted list of regulated substances and blends in that sector or subsector.

System means an assemblage of separate components that typically are connected and charged in the field with a regulated substance or substitute to perform a function or task.

Use means for any person to take any action with or to a regulated substance, regardless of whether the regulated substance is in bulk, contained within a product, or otherwise, except for the destruction of a regulated substance. Actions include, but are not limited to, the utilization, deployment, sale, distribution, offer for sale or distribution, discharge, incorporation, transformation, or other manipulation.

§ 84.54 Restrictions on the use of hydrofluorocarbons.

(a) No person may manufacture or import any product in the following sectors or subsectors that uses a regulated substance as listed in this paragraph:

- (1) Effective January 1, 2025, self-contained residential and light commercial air conditioning and heat pump products using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;
- (2) Effective January 1, 2025, residential dehumidifiers using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;
- (3) Effective January 1, 2025, household refrigerators and freezers using a

regulated substance, or a blend containing a regulated substance, with a global warming potential of 150 or greater;

(4) Effective January 1, 2025, retail food refrigeration—stand-alone units using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 150 or greater;

(5) Effective January 1, 2025, vending machines using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 150 or greater;

(6) Effective January 1, 2025, refrigerated transport—intermodal containers with the temperature of the refrigerant entering the evaporator (for direct heat exchange systems) or the temperature of the fluid exiting (for chillers) of -50°C (-58°F) or higher using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(7) Effective January 1, 2025, self-contained products in refrigerated transport—road and refrigerated transport—marine subsectors using any of the following: R-402A, R-402B, R-404A, R-407B, R-408A, R-410B, R-417A, R-421A, R-421B, R-422A, R-422B, R-422C, R-422D, R-424A, R-428A, R-434A, R-438A, R-507A, R-125/290/134a/600a (55/1/42.5/1.5), RS-44 (2003 formulation) or GHG-X5;

(8) Self-contained automatic commercial ice machines as follows:

(i) Effective January 1, 2026, ice maker products with a harvest rate as determined in accordance with 10 CFR 431.134, using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 150 or greater as follows:

(A) Batch type, as defined in 10 CFR 431.132, with a harvest rate less than or equal to 1,000 pounds of ice per 24 hours;

(B) Continuous type, as defined in 10 CFR 431.132, with a harvest rate less than or equal to 1,200 pounds of ice per 24 hours;

(ii) Effective January 1, 2027, batch type ice maker products, as defined in 10 CFR 431.132, with a harvest rate greater than 1,000 pounds of ice per 24 hours, as determined in accordance with 10 CFR 431.134, and continuous

type ice machine products, as defined in 10 CFR 431.132, with a harvest rate greater than 1,200 pounds of ice per 24 hours, as determined in accordance with 10 CFR 431.134, using any of the following: R-402A, R-402B, R-404A, R-407A, R-407B, R-407C, R-407F, R-408A, R-410A, R-410B, R-411A, R-411B, R-417A, R-417C, R-420A, R-421A, R-421B, R-422A, R-422B, R-422C, R-422D, R-424A, R-426A, R-428A, R-434A, R-437A, R-438A, R-442A, R-507A, HFC-134a, R-125/290/134a/600a (55/1/42.5/1.5), RB-276, RS-24 (2002 formulation), RS-44 (2003 formulation), GHG-X5, G2018C, or Freeze 12;

(9) Self-contained refrigerated food processing and dispensing products as follows:

(i) Effective January 1, 2027, products outside the scope of UL 621, “Ice Cream Makers,” Edition 7, dated May 07, 2010, with revisions through September 16, 2020, as of December 26, 2023, with refrigerant charge sizes less than or equal to 500 g using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 150 or greater;

(ii) Effective January 1, 2027, products outside the scope of UL 621, “Ice Cream Makers,” Edition 7, dated May 7, 2010, with revisions through September 16, 2020, as of December 26, 2023, with refrigerant charge sizes greater than 500 g, using any of the following: R-402A, R-402B, R-404A, R-407A, R-407B, R-407C, R-407F, R-407H, R-408A, R-410A, R-410B, R-411A, R-411B, R-417A, R-417C, R-420A, R-421A, R-421B, R-422A, R-422B, R-422C, R-422D, R-424A, R-426A, R-427A, R-428A, R-434A, R-437A, R-438A, R-507A, HFC-134a, HFC-227ea, R-125/290/134a/600a (55/1/42.5/1.5), RB-276, RS-24 (2002 formulation), RS-44 (2003 formulation), GHG-X5, or Freeze 12; and

(iii) Effective January 1, 2028, for refrigerated food processing and dispensing products within the scope of UL 621, “Ice Cream Makers,” Edition 7, dated May 7, 2010, with revisions through September 16, 2020, as of December 26, 2023, using any of the following: R-402A, R-402B, R-404A, R-407A, R-407B, R-407C, R-407F, R-407H, R-408A, R-410A, R-410B, R-411A, R-411B, R-417A, R-417C, R-420A, R-421A, R-421B, R-422A, R-422B, R-422C, R-

422D, R-424A, R-426A, R-427A, R-428A, R-434A, R-437A, R-438A, R-507A, HFC-134a, HFC-227ea, R-125/290/134a/600a (55/1/42.5/1.5), RB-276, RS-24 (2002 formulation), RS-44 (2003 formulation), GHG-X5, or Freeze 12.

(10) Chillers, when a stand-alone product, as follows:

(i) Effective January 1, 2025, chillers for comfort cooling using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(ii) Effective January 1, 2025, chillers for ice rinks using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(iii) Effective January 1, 2026, chillers for industrial process refrigeration where the temperature of the fluid exiting the chiller is greater than -22°F (-30°C) using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(iv) Effective January 1, 2028, chillers for industrial process refrigeration where the temperature of the fluid exiting the chiller is greater than or equal to -50°C (-58°F) and less than or equal to -30°C (-22°F) using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(11) Effective January 1, 2027, self-contained products in data center, information technology equipment facility, and computer room cooling using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(12) Industrial process refrigeration products, other than chillers, as follows:

(i) Effective January 1, 2026, products with a refrigerant charge capacity of 200 pounds or greater and with the refrigerant temperature entering the evaporator higher than -30°C (-22°F) using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 150 or greater;

(ii) Effective January 1, 2026, products with a refrigerant charge capacity less than 200 pounds and with the refrigerant temperature entering the

evaporator higher than -30°C (-22°F), using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 300 or greater;

(iii) Effective January 1, 2028, where the temperature of the refrigerant entering the evaporator is greater than or equal to -50°C (-58°F) and is less than or equal to -30°C (-22°F), using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(13) Motor vehicle air-conditioning as follows:

(i) Effective October 24, 2024, for Model Year 2025 and subsequent model year light-duty passenger cars and trucks (vehicles with a gross vehicle weight rating less than 8,500 lb) using or intended to use a regulated substance, or a blend containing a regulated substance, with a global warming potential of 150 or greater;

(ii) For Model Year 2028 and subsequent model year medium-duty passenger vehicles, heavy-duty pick-up trucks, and complete heavy-duty vans, as defined by the Federal Highway Administration at 40 CFR 86.1803-01, which have air conditioning equipment that will not be modified by upfitters using or intended to use a regulated substance, or a blend containing a regulated substance, with a global warming potential of 150 or greater;

(iii) Effective January 1, 2028, certain nonroad vehicles (agricultural tractors greater than 40 horsepower; self-propelled agricultural machinery; compact equipment; construction, forestry, and mining equipment; and commercial utility vehicles) using or intended to use a regulated substance, or a blend containing a regulated substance, with a global warming potential of 150 or greater;

(14) Effective January 1, 2025, foam products (but not including foam products in paragraph (a)(15) of this section) in the following subsectors using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 150 or greater:

(i) Rigid polyurethane appliance foam, commercial refrigeration foam,

laminated boardstock, marine flotation foam, sandwich panels, and slabstock;

- (ii) Flexible polyurethane;
- (iii) Integral skin polyurethane;
- (iv) Polystyrene—extruded boardstock, billet, and extruded sheet;
- (v) Phenolic insulation board and bunstock;
- (vi) Polyisocyanurate laminated boardstock;
- (vii) Polyolefin; and
- (viii) Rigid polyurethane spray foam (i.e., high-pressure two-component, low-pressure two-component, and one-component foam sealants).

(15) Effective January 1, 2026, foam products in the formulations specified in paragraphs (a)(14)(i) through (viii) of this section that are for use in space and military applications, except spray and pour foams that are for use in space vehicles as defined in § 84.3, which are not subject to a use restriction.

(16) Aerosol products as follows:

(i) Effective January 1, 2025, all aerosol products using a regulated substance with a global warming potential of 150 or greater, except products that use HFC-43-10mee (1,1,1,2,3,4,4,5,5,5-pentafluoropentane) or HFC-245fa (1,1,1,3,3-pentafluoropropane) as an aerosol solvent or those that use HFC-134a in the following specific uses;

(A) Cleaning products for removal of grease, flux and other soils from electrical equipment or electronics;

(B) Refrigerant flushes;

(C) Products for sensitivity testing of smoke detectors;

(D) Lubricants and freeze sprays for electrical equipment or electronics;

(E) Sprays for aircraft maintenance;

(F) Sprays containing corrosion preventive compounds used in the maintenance of aircraft, electrical equipment or electronics, or military equipment;

(G) Pesticides for use near electrical wires or in aircraft, in total release insecticide foggers, or in certified organic use pesticides for which EPA has specifically disallowed all other lower-GWP propellants;

(H) Mold release agents and mold cleaners;

(I) Lubricants and cleaners for spinnerets for synthetic fabrics;

(J) Duster sprays specifically for removal of dust from photographic nega-

tives, semiconductor chips, specimens under electron microscopes, and energized electrical equipment;

(K) Adhesives and sealants in large canisters;

(L) Document preservation sprays;

(M) Wound care sprays;

(N) Topical coolant sprays for pain relief;

(O) Products for removing bandage adhesives from skin.

(ii) Effective January 1, 2028, all aerosol products using a regulated substance with a global warming potential of 150 or greater.

(b) Effective three years after the dates listed for each subsector in paragraph (a) of this section, no person may sell, distribute, offer for sale or distribution, make available for sale or distribution, purchase or receive for sale or distribution, or attempt to purchase or receive for sale or distribution, or export any product that uses a regulated substance as listed in paragraph (a).

(c) No person may install any system, nor have any such system be installed through their position as a designer, owner, or operator of that system, in the following sectors or subsectors that uses a regulated substance as listed in this paragraph (c):

(1) Effective January 1, 2025, residential or light commercial air-conditioning or heat pump systems using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater, except for variable refrigerant flow air-conditioning and heat pump systems. New residential and light commercial air-conditioning and heat pump systems using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater may be installed prior to January 1, 2026, where all specified components of that system are manufactured or imported prior to January 1, 2025.

(2) Effective January 1, 2026, variable refrigerant flow systems for use as residential and light commercial air-conditioning or heat pumps, using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(3) Effective January 1, 2025, chillers for comfort cooling using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(4) Effective January 1, 2025, ice rinks using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(5) Effective January 1, 2026, chillers for industrial process refrigeration where the temperature of the fluid exiting the chiller is greater than -22°F (-30°C) using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(6) Effective January 1, 2028, chillers for industrial process refrigeration where the temperature of the fluid exiting the chiller is greater than or equal to -50°C (-58°F) and less than or equal to -30°C (-22°F) using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(7) Effective January 1, 2025, refrigerated transport—intermodal containers with the temperature of the refrigerant entering the evaporator (for direct heat exchange systems) or the temperature of the fluid exiting (for chillers) of -50°C (-58°F) or higher using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(8) Effective January 1, 2025, refrigerated transport—road or refrigerated transport—marine systems using any of the following: R-402A, R-402B, R-404A, R-407B, R-408A, R-410B, R-417A, R-421A, R-421B, R-422A, R-422B, R-422C, R-422D, R-424A, R-428A, R-434A, R-438A, R-507A, R-125/290/134a/600a (55/1/42.5/1.5), RS-44 (2003 formulation) or GHG-X5;

(9) Effective January 1, 2026, cold storage warehouse systems as follows:

(i) Systems with a refrigerant charge capacity of 200 pounds or greater, that are not the high temperature side of a cascade system, using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 150 or greater;

(ii) Systems with a refrigerant charge capacity less than 200 pounds,

using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 300 or greater;

(iii) Cascade refrigerant systems using a regulated substance, or a blend containing a regulated substance, on the high temperature side of the system with a global warming potential of 300 or greater;

(10) Industrial process refrigeration systems, other than chiller systems, as follows:

(i) Effective January 1, 2026, systems with a refrigerant charge capacity of 200 pounds or greater and with the refrigerant temperature entering the evaporator higher than -30°C (-22°F), that are not the high temperature side of a cascade system, using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 150 or greater;

(ii) Effective January 1, 2026, systems with a refrigerant charge capacity less than 200 pounds and with the refrigerant temperature entering the evaporator higher than -30°C (-22°F), using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 300 or greater;

(iii) Effective January 1, 2026, the high temperature side of cascade systems with the refrigerant temperature entering the evaporator higher than -30°C (-22°F) using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 300 or greater;

(iv) Effective January 1, 2028, where the temperature of the refrigerant entering the evaporator is greater than or equal to -50°C (-58°F) and is less than or equal to -30°C (-22°F), using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(11) Effective January 1, 2026, remote condensing units in retail food refrigeration systems as follows:

(i) Systems with a refrigerant charge capacity of 200 pounds or greater, that are not the high temperature side of a cascade system, using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 150 or greater;

(ii) Systems with a refrigerant charge capacity less than 200 pounds using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 300 or greater;

(iii) Cascade refrigerant systems using a regulated substance, or a blend containing a regulated substance, on the high temperature side of the system with a global warming potential of 300 or greater;

(12) Effective January 1, 2027, supermarket systems as follows:

(i) Systems with a refrigerant charge capacity of 200 pounds or greater, that are not the high temperature side of a cascade system, using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 150 or greater;

(ii) Systems with a refrigerant charge capacity less than 200 pounds using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 300 or greater;

(iii) Cascade refrigerant systems using a regulated substance, or a blend containing a regulated substance, on the high temperature side of the system with a global warming potential of 300 or greater;

(13) Effective January 1, 2027, data center, information technology equipment facility, and computer room cooling systems using a regulated substance, or a blend containing a regulated substance, with a global warming potential of 700 or greater;

(14) Effective January 1, 2027, automatic commercial ice machines with a remote condenser using any of the following: R-402A, R-402B, R-404A, R-407B, R-408A, R-410B, R-417A, R-421A, R-421B, R-422A, R-422B, R-422C, R-422D, R-424A, R-428A, R-434A, R-438A, R-507A, R-125/290/134a/600a (55/1/42.5/1.5), RS-44 (2003 formulation), or GHG-X5.

(15) Effective January 1, 2027, refrigerated food processing and dispensing equipment with a remote condenser using any of the following: R-402A, R-402B, R-404A, R-407A, R-407B, R-407C, R-407F, R-407H, R-408A, R-410A, R-410B, R-411A, R-411B, R-417A, R-417C, R-420A, R-421A, R-421B, R-422A, R-422B, R-422C, R-422D, R-424A, R-426A, R-427A, R-428A, R-434A, R-437A, R-

438A, R-507A, HFC-134a, HFC-227ea, R-125/290/134a/600a (55/1/42.5/1.5), RB-276, RS-24 (2002 formulation), RS-44 (2003 formulation), GHG-X5, or Freeze 12.

(d) The compliance date for the installation of a system in paragraph (c) of this section for the industrial process refrigeration systems with a January 1, 2026, compliance date, retail food—supermarket, cold storage warehouse, and ice rink subsectors is extended one year beyond the specified compliance date when an approved building permit issued prior to October 5, 2023, specifies the use of a restricted regulated substance, or blend containing a regulated substance, in a system detailed in that permit.

(e) The following actions, upon charging the system to full charge, are considered an installation of a refrigeration, air conditioning, and heat pump system under paragraph (c) of this section:

(1) Assembling a system for the first time from used or new components;

(2) Increasing the cooling capacity, in BTU per hour, of an existing system; or

(3) Replacing 75 percent or more of evaporators (by number) and 100 percent of the compressor racks, condensers, and connected evaporator loads of an existing system.

(f) Effective upon the dates listed for each subsector in paragraphs (a) and (c) of this section, no person may manufacture, import, sell, distribute, offer for sale or distribution, make available for sale or distribution, purchase or receive for sale or distribution, or attempt to purchase or receive for sale or distribution, or export any product or specified component that is not labeled in accordance with § 84.58.

(g) Every product or system using or intended to use a regulated substance or blend containing a regulated substance that is manufactured, imported, sold, distributed, offered for sale or distribution, made available for sale or distribution, purchased or received for sale or distribution, or attempted to be purchased or received for sale or distribution, or exported in contravention of paragraphs (a) through (f) of this section constitutes a separate violation of this subpart.

(h) No person may provide false, inaccurate, or misleading information to

Environmental Protection Agency

§ 84.58

EPA when reporting or providing any communication required under this subpart.

(i) No person may falsely indicate through marketing, packaging, labeling, or other means that a product or specified component uses or is intended to use a regulated substance, blend containing a regulated substance, or substitute that differs from the regulated substance, blend containing a regulated substance, or substitute that is actually used.

(j) Section (k) of the AIM Act states that sections 113, 114, 304, and 307 of the Clean Air Act (42 U.S.C. 7413, 7414, 7604, 7607) shall apply to this section and any rule, rulemaking, or regulation promulgated by the Administrator pursuant to this section as though this section were expressly included in title VI of that Act (42 U.S.C. 7671 *et seq.*). Violation of this part is subject to Federal enforcement and the penalties laid out in section 113 of the Clean Air Act.

[88 FR 73205, Oct. 24, 2023; 88 FR 88832, Dec. 26, 2023]

§ 84.56 Exemptions.

(a) The regulations under this subpart, including §§ 84.54, 84.58, 84.60, and 84.62, do not apply to:

(1) Equipment in existence in the United States prior to December 27, 2020; and

(2) Any product using a regulated substance or a blend containing a regulated substance, or intended to use a regulated substance or a blend containing a regulated substance, in an application listed at § 84.13(a), for a year or years for which that application receives an application-specific allowance as defined at § 84.3.

(b) The prohibitions on the manufacture, import, sale, distribution, offer for sale or distribution, or export of products in § 84.54(a) and (b) do not apply to components that use, or are intended to use, any regulated substance.

(c) The prohibitions on the sale, distribution, offer for sale or distribution, or export of products in § 84.54(b) do not apply to:

(1) Products after a period of ordinary utilization or operation by a consumer; or

(2) Products within the disposal or recycling chain.

(d) The prohibition on the import of used products in § 84.54(a) does not apply to:

(1) Systems in use by a conveyance in trade travelling into U.S. jurisdiction including refrigeration, air-conditioning, and heat pump systems in operation aboard ships, planes, motor vehicles, and intermodal containers;

(2) Products in the possession of a consumer for personal use; or

(3) Products imported solely for recycling or disposal.

§ 84.58 Labeling.

(a) Effective upon the dates listed for each subsector in § 84.54(a) and (c), any product, specified component, or system manufactured, imported, or installed within the refrigeration, air-conditioning, and heat pump sector using any regulated substance, or blend containing any regulated substance, regardless of global warming potential must have a permanent label compliant with paragraph (d) of this section stating:

(1) The chemical name(s) or American Society of Heating, Refrigerating and Air-Conditioning Engineers designation of the regulated substance(s) or blend containing a regulated substance;

(2) The full date, or at minimum the four-digit year, of manufacture. For field-charged system installations, this shall be the date of first charge and the label shall be completed at first charge. For MVACs listed in § 84.54(a)(13)(i) and (ii), the model year may be used instead of the date of manufacture.

(3) An indication of the full refrigerant charge capacity, either as the specific charge size of the system, or the charge size as it relates to the threshold for the relevant subsector. This means an indication that the charge is either two hundred pounds or more, or less than two hundred pounds, in the following subsectors:

(i) Industrial process refrigeration (without chillers);

(ii) Retail food refrigeration—supermarket systems;

(iii) Retail food refrigeration—remote condensing units; and

(iv) Cold storage warehouses.

(4) An indication of the charge size of the equipment or the charge size as it relates to the threshold for self-contained refrigerated food processing and dispensing products. This means an indication that the charge is greater than or equal to 500 grams, or less than 500 grams.

(5) An indication of the harvest rate, either as the specific harvest rate of the equipment, or the harvest rate as it relates to the threshold for self-contained automatic commercial ice machines, and the type of ice machine (either batch or continuous). This means an indication that that harvest rate is either greater than 1,000 pounds of ice per day or less than or equal to 1,000 pounds of ice per day for batch type ice makers, and an indication that the harvest rate is either greater than 1,200 pounds of ice per day or less than or equal to 1,200 pounds of ice per day for continuous type ice makers.

(6) An indication of the designed exiting fluid temperature range for industrial process refrigeration chillers and the designed refrigerant temperature range when it enters the evaporator for industrial process refrigeration systems without chillers.

(b) Effective upon the date listed for each subsector in §84.54(c), or the earliest date should the specified component be used in multiple subsectors, any specified component manufactured or imported and intended for use in those subsectors that uses or is intended to use any regulated substance, or blend containing any regulated substance, regardless of global warming potential, must have a permanent label compliant with paragraph (c) of this section containing the information in paragraph (a)(1) of this section. For specified components that are intended for use with a regulated substance or blends containing a regulated substance that exceed the applicable GWP limit or HFC restriction, the label must state “For servicing existing equipment only” in addition to the other required labeling elements.

(c) Effective upon the dates listed for each subsector in §84.54(a) and (c), any product manufactured, imported, or installed within the foam or aerosol sectors using any regulated substance, or

blend containing any regulated substance, regardless of global warming potential, must have a permanent label compliant with paragraph (d) of this section stating:

(1) The chemical name(s) or American Society of Heating, Refrigerating and Air-Conditioning Engineers designation of any regulated substance(s) or blend containing a regulated substance used;

(2) If an HFC with a GWP higher than the limit is used or if multiple HFCs are used, either the weights of the HFC(s) relative to the other blowing agents, propellants, solvents, or to the other HFCs must be on the label, or the label must state “GWP<150.”

(3) The full date, or at minimum the four-digit year, of manufacture.

(d) The permanent label must be:

(1) In English;

(2) Durable and printed or otherwise labeled on, or affixed to, an external surface of the product;

(3) Readily visible and legible;

(4) Able to withstand open weather exposure without a substantial reduction in visibility or legibility, if applicable; and

(5) Displayed on a background of contrasting color.

(e) The requirements of this section may be met through the use of existing labels required under other authorities that contain the necessary information. The labeling requirements may also be met by providing the required information in packaging materials or through an on-product QR code. The packaging must be present with the product or specified component at the point of sale and import. The QR code must direct to the required information and meet all the requirements of the on-product label. The QR code must be functional and include adjacent text to indicate the purpose of the QR code.

(f) For products sold or distributed, offered for sale or distribution, or made available electronically through online commerce, the label must be readily visible and legible in either photographs of the products, photographs of packaging materials that contain the required information, or an item description that contains the required information.

(g) Any product or system, using a regulated substance manufactured, imported, or installed after the compliance date for that sector or subsector, that lacks a label will be presumed to use a regulated substance with a global warming potential that exceeds the limit or is specifically listed in § 84.54(a) or (c).

§ 84.60 Reporting and recordkeeping.

(a) *Reporting.* (1) Effective January 1, 2025, any person who imports or manufactures a product or specified component within a sector or subsector listed in § 84.54 that uses or is intended to use a regulated substance or blend containing a regulated substance must comply with the following reporting and recordkeeping requirements:

(i) Reports must be submitted annually to EPA within 90 days of the end of the reporting period;

(ii) Reports must be submitted electronically in a format specified by EPA;

(iii) Each report shall be signed and attested;

(2) Each report must include:

(i) The reporting entity's name, address, contact person, email address, and phone number of the contact person;

(ii) The year covered under the report and the date of submittal;

(iii) All applicable NAICS code(s); and

(iv) A statement of certification that the data are accurate and that the products use regulated substances, or blends containing regulated substances, that meet the requirements of § 84.54, and are labeled in accordance with § 84.58.

(3) Reports for products and specified components in the refrigeration, air-conditioning, and heat pump sector must also include the following information:

(i) For each set of products or specified components with the same combination of charge size and regulated substance(s), the report must specify the subsector of the product or specified component based on the categorization in § 84.54; the identity of the regulated substance or blend containing a regulated substance, the charge size (including holding charge

or no charge, if applicable), and the number of units imported, manufactured, and exported;

(ii) For products and specified components that include closed-cell foam containing a regulated substance, the report must include the identity of the regulated substance(s) in the foam, the mass of the regulated substance(s) in the foam, and the number of products manufactured, imported, or exported with the same combination of mass and identity of regulated substance(s) within the closed-cell foam.

(iii) Total mass in metric tons of each regulated substance or blend containing a regulated substance contained in all products or specified components manufactured, imported, and exported annually.

(4) Reports for products in the foam sector must also include the following information:

(i) For containers or foam blowing products that contain foam blowing agent and are intended for use to blow foam, the report must specify the subsector of the product based on the categorization in § 84.54, the identity of the regulated substance(s) contained in the product, the mass of the regulated substance(s) used, and the number of units manufactured, imported, or exported.

(ii) For each set of products, other than containers described in paragraph (a)(4)(i) of this section, with the same combination of density and identity of regulated substance(s), the report must specify the subsector of the product based on the categorization in § 84.54, the identity of the regulated substance(s) contained in the foam, the volume of foam, and the number of units manufactured, imported, or exported; and

(iii) Total mass in metric tons of each regulated substance contained in all products manufactured, imported, and exported annually.

(5) Reports for products in the aerosol sector must also include the following information:

(i) For each set of products with the same combination of regulated substance(s) and quantity of regulated substance(s), the report must specify the subsector of the product based on

the categorization in § 84.54, the identity of the regulated substance(s), their percentages if more than one regulated substance is used, and the number of units manufactured, imported, or exported; and

(ii) Total mass in metric tons of each regulated substance contained in all products manufactured, imported, and exported annually.

(6) Any failure by a domestic manufacturer or importer of a product or specified component that uses or is intended to use a regulated substance or a blend containing a regulated substance to report required information or provide accurate information pursuant to this section shall be considered a violation of this section.

(b) *Recordkeeping.* (1) Each domestic manufacturer or importer of a product or specified component within a sector or subsector listed in § 84.54 that uses or is intended to use a regulated substance or blend containing a regulated substance must retain the following records for a minimum of three years from the date of creation of the record and must make them available to EPA upon request:

(i) Records that form the basis of the reports required in paragraph (a) of this section; and

(ii) The entity to whom the product or specified component using a regulated substance were sold, distributed, or in any way conveyed to.

(2) In addition to the records in paragraph (b)(1) of this section, importers of products and specified components using or intended to use a regulated substance or a blend containing a regulated substance must retain the following records for each import for a minimum of three years from the date of creation of the record and must make them available to EPA upon request:

- (i) A copy of the bill of lading;
- (ii) The invoice;
- (iii) The U.S. Customs and Border Protection entry documentation;
- (iv) Port of entry;
- (v) Country of origin and the country of shipment to the United States.

§ 84.62 Technology transitions petition requirements.

(a) Each petition sent to the Administrator under subsection (i) of the AIM Act shall include the following elements:

(1) The sector and subsector(s) for which restrictions on use of the regulated substance would apply.

(2) For each sector and subsector identified in a petition, the restriction on the use of a regulated substance through any of the following:

(i) A global warming potential limit that will apply to regulated substances or blends containing regulated substances with global warming potentials at or above that limit;

(ii) Identification of the regulated substance(s) or blend(s) containing a regulated substance to be restricted and its global warming potential according to § 84.64; or

(iii) Another form of restriction with an explanation for why a restriction under paragraph (a)(2)(i) or (ii) of this section would not be appropriate.

(3) For each restriction on the use of a regulated substance contained in a petition, the effective date on which the regulated substance use restriction would commence and information supporting the identified effective date.

(4) Address whether the Administrator negotiate with stakeholders in accordance with the negotiated rule-making procedure provided for under subchapter III of chapter 5 of title 5, United States Code, including an explanation of their position to support or oppose the use of the negotiated rule-making procedure.

(5) For each requested restriction, to the extent practicable, information related to the considerations provided in subsection (i)(4) of 42 U.S.C. 7675 to facilitate the Agency's review of the petition.

(b) Any petition submitted to the Administrator must be submitted electronically using the methods prescribed by the Administrator.

§ 84.64 Global warming potentials.

(a) The global warming potential of a regulated substance is the exchange value for the regulated substance listed in subsection (c) of the AIM Act and in appendix A to this part 84.

(b) For blends containing a regulated substance, the global warming potential of the blend is the sum of the global warming potentials of each constituent of the blend multiplied by the

nominal mass fraction of that constituent within the blend. The global warming potential of each constituent shall be as follows:

TABLE 1 TO PARAGRAPH (b)

Substance name	100-Year global warming potential
2-chloropropane	1
Acetone	0.5
Acetone/isopentane blend	1
Dimethyl ether	1
Formic acid	5
HCFO-1224yd(Z)	1
HCFO-1233yd(Z)	1
HCFO-1233zd(E)	4
HCO-1130(E)	5
HFE-347pcf2	987
HFE-449s1 (HFE-7100)	297
HFE-569sf2	59
HFO-1234yf	1
HFO-1234ze(E)	1
HFO-1336mzz(E)	26
HFO-1336mzz(Z)	2
Hydrocarbons (C5-C20)	1-2.7
Methoxytridecafluoroheptane (MPHE) isomers	2.5
Methyl formate	13
Methylal (dimethoxymethane)	1
Oxygenated organic solvents (esters, ethers, alcohols, ketones)	1-13
R-170 (ethane)	5.5
R-290 (propane)	3.3
R-600 (butane)	4
R-600a (isobutane)	1
R-717 (ammonia)	1
R-744 (carbon dioxide)	1
R-1150 (ethylene)	3.7
R-1270 (propylene)	1.8
Saturated light hydrocarbons (C3-C6)	1-4

(c) For constituents of a blend containing a regulated substance that do not have a global warming potential as provided in paragraph (b) of this sec-

tion, the constituent and its nominal mass fraction in the blend shall be excluded from the calculation in paragraph (b).

APPENDIX A TO PART 84—REGULATED SUBSTANCES

HFCs LISTED AS REGULATED SUBSTANCES IN THE AIM ACT¹

HFC	Chemical formula	Exchange value
HFC-134	CHF ₂ CHF ₂	1,100
HFC-134a	CH ₂ FCF ₃	1,430
HFC-143	CH ₂ FCHF ₂	353
HFC-245fa	CHF ₂ CH ₂ CF ₃	1,030
HFC-365mfc	CF ₃ CH ₂ CF ₂ CH ₃	794
HFC-227ea	CF ₃ CHFCF ₃	3,220
HFC-236cb	CH ₂ FCF ₂ CF ₃	1,340
HFC-236ea	CHF ₂ CHFCF ₃	1,370
HFC-236fa	CF ₃ CH ₂ CF ₃	9,810
HFC-245ca	CH ₂ FCF ₂ CHF ₂	693
HFC-43-10mee	CF ₃ CHFCF ₂ CF ₃	1,640
HFC-32	CH ₂ F ₂	675
HFC-125	CHF ₂ CF ₃	3,500
HFC-143a	CH ₃ CF ₃	4,470
HFC-41	CH ₃ F	92

HFCs LISTED AS REGULATED SUBSTANCES IN THE AIM ACT¹—Continued

HFC	Chemical formula	Exchange value
HFC-152	CH ₂ FCH ₂ F	53
HFC-152a	CH ₃ CHF ₂	124
HFC-23	CHF ₃	14,800

¹ This table includes all isomers of the substances above, regardless of whether the isomer is explicitly listed on its own.

[86 FR 55222, Oct. 5, 2021]

FINDING AIDS

A list of CFR titles, subtitles, chapters, subchapters and parts and an alphabetical list of agencies publishing in the CFR are included in the CFR Index and Finding Aids volume to the Code of Federal Regulations which is published separately and revised annually.

Table of CFR Titles and Chapters

Alphabetical List of Agencies Appearing in the CFR

List of CFR Sections Affected

Table of CFR Titles and Chapters

(Revised as of July 1, 2024)

Title 1—General Provisions

- I Administrative Committee of the Federal Register (Parts 1—49)
- II Office of the Federal Register (Parts 50—299)
- III Administrative Conference of the United States (Parts 300—399)
- IV Miscellaneous Agencies (Parts 400—599)
- VI National Capital Planning Commission (Parts 600—699)

Title 2—Grants and Agreements

SUBTITLE A—OFFICE OF MANAGEMENT AND BUDGET GUIDANCE FOR GRANTS AND AGREEMENTS

- I Office of Management and Budget Governmentwide Guidance for Grants and Agreements (Parts 2—199)
- II Office of Management and Budget Guidance (Parts 200—299)

SUBTITLE B—FEDERAL AGENCY REGULATIONS FOR GRANTS AND AGREEMENTS

- III Department of Health and Human Services (Parts 300—399)
- IV Department of Agriculture (Parts 400—499)
- VI Department of State (Parts 600—699)
- VII Agency for International Development (Parts 700—799)
- VIII Department of Veterans Affairs (Parts 800—899)
- IX Department of Energy (Parts 900—999)
- X Department of the Treasury (Parts 1000—1099)
- XI Department of Defense (Parts 1100—1199)
- XII Department of Transportation (Parts 1200—1299)
- XIII Department of Commerce (Parts 1300—1399)
- XIV Department of the Interior (Parts 1400—1499)
- XV Environmental Protection Agency (Parts 1500—1599)
- XVI U.S. International Development Finance Corporation (Parts 1600—1699)
- XXVIII National Aeronautics and Space Administration (Parts 1800—1899)
- XX United States Nuclear Regulatory Commission (Parts 2000—2099)
- XXII Corporation for National and Community Service (Parts 2200—2299)
- XXIII Social Security Administration (Parts 2300—2399)
- XXIV Department of Housing and Urban Development (Parts 2400—2499)

Chap. **Title 2—Grants and Agreements—Continued**

XXV	National Science Foundation (Parts 2500—2599)
XXVI	National Archives and Records Administration (Parts 2600—2699)
XXVII	Small Business Administration (Parts 2700—2799)
XXVIII	Department of Justice (Parts 2800—2899)
XXIX	Department of Labor (Parts 2900—2999)
XXX	Department of Homeland Security (Parts 3000—3099)
XXXI	Institute of Museum and Library Services (Parts 3100—3199)
XXXII	National Endowment for the Arts (Parts 3200—3299)
XXXIII	National Endowment for the Humanities (Parts 3300—3399)
XXXIV	Department of Education (Parts 3400—3499)
XXXV	Export-Import Bank of the United States (Parts 3500—3599)
XXXVI	Office of National Drug Control Policy, Executive Office of the President (Parts 3600—3699)
XXXVII	Peace Corps (Parts 3700—3799)
LVIII	Election Assistance Commission (Parts 5800—5899)
LIX	Gulf Coast Ecosystem Restoration Council (Parts 5900—5999)
LX	Federal Communications Commission (Parts 6000—6099)

Title 3—The President

I	Executive Office of the President (Parts 100—199)

Title 4—Accounts

I	Government Accountability Office (Parts 1—199)

Title 5—Administrative Personnel

I	Office of Personnel Management (Parts 1—1199)
II	Merit Systems Protection Board (Parts 1200—1299)
III	Office of Management and Budget (Parts 1300—1399)
IV	Office of Personnel Management and Office of the Director of National Intelligence (Parts 1400—1499)
V	The International Organizations Employees Loyalty Board (Parts 1500—1599)
VI	Federal Retirement Thrift Investment Board (Parts 1600—1699)
VIII	Office of Special Counsel (Parts 1800—1899)
IX	Appalachian Regional Commission (Parts 1900—1999)
XI	Armed Forces Retirement Home (Parts 2100—2199)
XIV	Federal Labor Relations Authority, General Counsel of the Federal Labor Relations Authority and Federal Service Impasses Panel (Parts 2400—2499)
XVI	Office of Government Ethics (Parts 2600—2699)
XXI	Department of the Treasury (Parts 3100—3199)
XXII	Federal Deposit Insurance Corporation (Parts 3200—3299)
XXIII	Department of Energy (Parts 3300—3399)

Title 5—Administrative Personnel—Continued

Chap.	
XXIV	Federal Energy Regulatory Commission (Parts 3400—3499)
XXV	Department of the Interior (Parts 3500—3599)
XXVI	Department of Defense (Parts 3600—3699)
XXVIII	Department of Justice (Parts 3800—3899)
XXIX	Federal Communications Commission (Parts 3900—3999)
XXX	Farm Credit System Insurance Corporation (Parts 4000—4099)
XXXI	Farm Credit Administration (Parts 4100—4199)
XXXIII	U.S. International Development Finance Corporation (Parts 4300—4399)
XXXIV	Securities and Exchange Commission (Parts 4400—4499)
XXXV	Office of Personnel Management (Parts 4500—4599)
XXXVI	Department of Homeland Security (Parts 4600—4699)
XXXVII	Federal Election Commission (Parts 4700—4799)
XL	Interstate Commerce Commission (Parts 5000—5099)
XLI	Commodity Futures Trading Commission (Parts 5100—5199)
XLII	Department of Labor (Parts 5200—5299)
XLIII	National Science Foundation (Parts 5300—5399)
XLV	Department of Health and Human Services (Parts 5500—5599)
XLVI	Postal Rate Commission (Parts 5600—5699)
XLVII	Federal Trade Commission (Parts 5700—5799)
XLVIII	Nuclear Regulatory Commission (Parts 5800—5899)
XLIX	Federal Labor Relations Authority (Parts 5900—5999)
L	Department of Transportation (Parts 6000—6099)
LII	Export-Import Bank of the United States (Parts 6200—6299)
LIII	Department of Education (Parts 6300—6399)
LIV	Environmental Protection Agency (Parts 6400—6499)
LV	National Endowment for the Arts (Parts 6500—6599)
LVI	National Endowment for the Humanities (Parts 6600—6699)
LVII	General Services Administration (Parts 6700—6799)
LVIII	Board of Governors of the Federal Reserve System (Parts 6800—6899)
LIX	National Aeronautics and Space Administration (Parts 6900—6999)
LX	United States Postal Service (Parts 7000—7099)
LXI	National Labor Relations Board (Parts 7100—7199)
LXII	Equal Employment Opportunity Commission (Parts 7200—7299)
LXIII	Inter-American Foundation (Parts 7300—7399)
LXIV	Merit Systems Protection Board (Parts 7400—7499)
LXV	Department of Housing and Urban Development (Parts 7500—7599)
LXVI	National Archives and Records Administration (Parts 7600—7699)
LXVII	Institute of Museum and Library Services (Parts 7700—7799)
LXVIII	Commission on Civil Rights (Parts 7800—7899)
LXIX	Tennessee Valley Authority (Parts 7900—7999)

Title 5—Administrative Personnel—Continued

Chap.	
LXX	Court Services and Offender Supervision Agency for the District of Columbia (Parts 8000—8099)
LXXI	Consumer Product Safety Commission (Parts 8100—8199)
LXXIII	Department of Agriculture (Parts 8300—8399)
LXXIV	Federal Mine Safety and Health Review Commission (Parts 8400—8499)
LXXVI	Federal Retirement Thrift Investment Board (Parts 8600—8699)
LXXVII	Office of Management and Budget (Parts 8700—8799)
LXXX	Federal Housing Finance Agency (Parts 9000—9099)
LXXXIII	Special Inspector General for Afghanistan Reconstruction (Parts 9300—9399)
LXXXIV	Bureau of Consumer Financial Protection (Parts 9400—9499)
LXXXVI	National Credit Union Administration (Parts 9600—9699)
XC VII	Department of Homeland Security Human Resources Management System (Department of Homeland Security—Office of Personnel Management) (Parts 9700—9799)
XC VIII	Council of the Inspectors General on Integrity and Efficiency (Parts 9800—9899)
XC IX	Military Compensation and Retirement Modernization Commission (Parts 9900—9999)
C	National Council on Disability (Parts 10000—10049)
CI	National Mediation Board (Parts 10100—10199)
CII	U.S. Office of Special Counsel (Parts 10200—10299)
CIII	U.S. Office of Federal Mediation and Conciliation Service (Parts 10300—10399)
CIV	Office of the Intellectual Property Enforcement Coordinator (Part 10400—10499)

Title 6—Domestic Security

I	Department of Homeland Security, Office of the Secretary (Parts 1—199)
X	Privacy and Civil Liberties Oversight Board (Parts 1000—1099)

Title 7—Agriculture

	SUBTITLE A—OFFICE OF THE SECRETARY OF AGRICULTURE (PARTS 0—26)
	SUBTITLE B—REGULATIONS OF THE DEPARTMENT OF AGRICULTURE
I	Agricultural Marketing Service (Standards, Inspections, Marketing Practices), Department of Agriculture (Parts 27—209)
II	Food and Nutrition Service, Department of Agriculture (Parts 210—299)
III	Animal and Plant Health Inspection Service, Department of Agriculture (Parts 300—399)
IV	Federal Crop Insurance Corporation, Department of Agriculture (Parts 400—499)
V	Agricultural Research Service, Department of Agriculture (Parts 500—599)

Title 7—Agriculture—Continued

Chap.	
VI	Natural Resources Conservation Service, Department of Agriculture (Parts 600—699)
VII	Farm Service Agency, Department of Agriculture (Parts 700—799)
VIII	Agricultural Marketing Service (Federal Grain Inspection Service, Fair Trade Practices Program), Department of Agriculture (Parts 800—899)
IX	Agricultural Marketing Service (Marketing Agreements and Orders; Fruits, Vegetables, Nuts), Department of Agriculture (Parts 900—999)
X	Agricultural Marketing Service (Marketing Agreements and Orders; Milk), Department of Agriculture (Parts 1000—1199)
XI	Agricultural Marketing Service (Marketing Agreements and Orders; Miscellaneous Commodities), Department of Agriculture (Parts 1200—1299)
XIV	Commodity Credit Corporation, Department of Agriculture (Parts 1400—1499)
XV	Foreign Agricultural Service, Department of Agriculture (Parts 1500—1599)
XVI	[Reserved]
XVII	Rural Utilities Service, Department of Agriculture (Parts 1700—1799)
XVIII	Rural Housing Service, Rural Business-Cooperative Service, Rural Utilities Service, and Farm Service Agency, Department of Agriculture (Parts 1800—2099)
XX	[Reserved]
XXV	Office of Advocacy and Outreach, Department of Agriculture (Parts 2500—2599)
XXVI	Office of Inspector General, Department of Agriculture (Parts 2600—2699)
XXVII	Office of Information Resources Management, Department of Agriculture (Parts 2700—2799)
XXVIII	Office of Operations, Department of Agriculture (Parts 2800—2899)
XXIX	Office of Energy Policy and New Uses, Department of Agriculture (Parts 2900—2999)
XXX	Office of the Chief Financial Officer, Department of Agriculture (Parts 3000—3099)
XXXI	Office of Environmental Quality, Department of Agriculture (Parts 3100—3199)
XXXII	Office of Procurement and Property Management, Department of Agriculture (Parts 3200—3299)
XXXIII	Office of Transportation, Department of Agriculture (Parts 3300—3399)
XXXIV	National Institute of Food and Agriculture (Parts 3400—3499)
XXXV	Rural Housing Service, Department of Agriculture (Parts 3500—3599)
XXXVI	National Agricultural Statistics Service, Department of Agriculture (Parts 3600—3699)

Title 7—Agriculture—Continued	
Chap.	
XXXVII	Economic Research Service, Department of Agriculture (Parts 3700—3799)
XXXVIII	World Agricultural Outlook Board, Department of Agriculture (Parts 3800—3899)
XLI	[Reserved]
XLII	Rural Business-Cooperative Service, Department of Agriculture (Parts 4200—4299)
L	Rural Business-Cooperative Service, Rural Housing Service, and Rural Utilities Service, Department of Agriculture (Parts 5000—5099)

Title 8—Aliens and Nationality

I	Department of Homeland Security (Parts 1—499)
V	Executive Office for Immigration Review, Department of Justice (Parts 1000—1399)

Title 9—Animals and Animal Products

I	Animal and Plant Health Inspection Service, Department of Agriculture (Parts 1—199)
II	Agricultural Marketing Service (Fair Trade Practices Program), Department of Agriculture (Parts 200—299)
III	Food Safety and Inspection Service, Department of Agriculture (Parts 300—599)

Title 10—Energy

I	Nuclear Regulatory Commission (Parts 0—199)
II	Department of Energy (Parts 200—699)
III	Department of Energy (Parts 700—999)
X	Department of Energy (General Provisions) (Parts 1000—1099)
XIII	Nuclear Waste Technical Review Board (Parts 1300—1399)
XVII	Defense Nuclear Facilities Safety Board (Parts 1700—1799)
XVIII	Northeast Interstate Low-Level Radioactive Waste Commission (Parts 1800—1899)

Title 11—Federal Elections

I	Federal Election Commission (Parts 1—9099)
II	Election Assistance Commission (Parts 9400—9499)

Title 12—Banks and Banking

I	Comptroller of the Currency, Department of the Treasury (Parts 1—199)
II	Federal Reserve System (Parts 200—299)
III	Federal Deposit Insurance Corporation (Parts 300—399)

Chap. **Title 12—Banks and Banking—Continued**

- IV Export-Import Bank of the United States (Parts 400—499)
- V (Parts 500—599) [Reserved]
- VI Farm Credit Administration (Parts 600—699)
- VII National Credit Union Administration (Parts 700—799)
- VIII Federal Financing Bank (Parts 800—899)
- IX (Parts 900—999)[Reserved]
- X Consumer Financial Protection Bureau (Parts 1000—1099)
- XI Federal Financial Institutions Examination Council (Parts 1100—1199)
- XII Federal Housing Finance Agency (Parts 1200—1299)
- XIII Financial Stability Oversight Council (Parts 1300—1399)
- XIV Farm Credit System Insurance Corporation (Parts 1400—1499)
- XV Department of the Treasury (Parts 1500—1599)
- XVI Office of Financial Research, Department of the Treasury (Parts 1600—1699)
- XVII Office of Federal Housing Enterprise Oversight, Department of Housing and Urban Development (Parts 1700—1799)
- XVIII Community Development Financial Institutions Fund, Department of the Treasury (Parts 1800—1899)

Title 13—Business Credit and Assistance

- I Small Business Administration (Parts 1—199)
- III Economic Development Administration, Department of Commerce (Parts 300—399)
- IV Emergency Steel Guarantee Loan Board (Parts 400—499)
- V Emergency Oil and Gas Guaranteed Loan Board (Parts 500—599)

Title 14—Aeronautics and Space

- I Federal Aviation Administration, Department of Transportation (Parts 1—199)
- II Office of the Secretary, Department of Transportation (Aviation Proceedings) (Parts 200—399)
- III Commercial Space Transportation, Federal Aviation Administration, Department of Transportation (Parts 400—1199)
- V National Aeronautics and Space Administration (Parts 1200—1299)
- VI Air Transportation System Stabilization (Parts 1300—1399)

Title 15—Commerce and Foreign Trade

- SUBTITLE A—OFFICE OF THE SECRETARY OF COMMERCE (PARTS 0—29)
- SUBTITLE B—REGULATIONS RELATING TO COMMERCE AND FOREIGN TRADE
- I Bureau of the Census, Department of Commerce (Parts 30—199)

Title 15—Commerce and Foreign Trade—Continued

Chap.

- II National Institute of Standards and Technology, Department of Commerce (Parts 200—299)
- III International Trade Administration, Department of Commerce (Parts 300—399)
- IV Foreign-Trade Zones Board, Department of Commerce (Parts 400—499)
- VII Bureau of Industry and Security, Department of Commerce (Parts 700—799)
- VIII Bureau of Economic Analysis, Department of Commerce (Parts 800—899)
- IX National Oceanic and Atmospheric Administration, Department of Commerce (Parts 900—999)
- XI National Technical Information Service, Department of Commerce (Parts 1100—1199)
- XIII East-West Foreign Trade Board (Parts 1300—1399)
- XIV Minority Business Development Agency (Parts 1400—1499)
- XV Office of the Under-Secretary for Economic Affairs, Department of Commerce (Parts 1500—1599)
- SUBTITLE C—REGULATIONS RELATING TO FOREIGN TRADE AGREEMENTS
- XX Office of the United States Trade Representative (Parts 2000—2099)
- SUBTITLE D—REGULATIONS RELATING TO TELECOMMUNICATIONS AND INFORMATION
- XXIII National Telecommunications and Information Administration, Department of Commerce (Parts 2300—2399) [Reserved]

Title 16—Commercial Practices

- I Federal Trade Commission (Parts 0—999)
- II Consumer Product Safety Commission (Parts 1000—1799)

Title 17—Commodity and Securities Exchanges

- I Commodity Futures Trading Commission (Parts 1—199)
- II Securities and Exchange Commission (Parts 200—399)
- IV Department of the Treasury (Parts 400—499)

Title 18—Conservation of Power and Water Resources

- I Federal Energy Regulatory Commission, Department of Energy (Parts 1—399)
- III Delaware River Basin Commission (Parts 400—499)
- VI Water Resources Council (Parts 700—799)
- VIII Susquehanna River Basin Commission (Parts 800—899)
- XIII Tennessee Valley Authority (Parts 1300—1399)

Chap.

Title 19—Customs Duties

- I U.S. Customs and Border Protection, Department of Homeland Security; Department of the Treasury (Parts 0—199)
- II United States International Trade Commission (Parts 200—299)
- III International Trade Administration, Department of Commerce (Parts 300—399)
- IV U.S. Immigration and Customs Enforcement, Department of Homeland Security (Parts 400—599) [Reserved]

Title 20—Employees' Benefits

- I Office of Workers' Compensation Programs, Department of Labor (Parts 1—199)
- II Railroad Retirement Board (Parts 200—399)
- III Social Security Administration (Parts 400—499)
- IV Employees' Compensation Appeals Board, Department of Labor (Parts 500—599)
- V Employment and Training Administration, Department of Labor (Parts 600—699)
- VI Office of Workers' Compensation Programs, Department of Labor (Parts 700—799)
- VII Benefits Review Board, Department of Labor (Parts 800—899)
- VIII Joint Board for the Enrollment of Actuaries (Parts 900—999)
- IX Office of the Assistant Secretary for Veterans' Employment and Training Service, Department of Labor (Parts 1000—1099)

Title 21—Food and Drugs

- I Food and Drug Administration, Department of Health and Human Services (Parts 1—1299)
- II Drug Enforcement Administration, Department of Justice (Parts 1300—1399)
- III Office of National Drug Control Policy (Parts 1400—1499)

Title 22—Foreign Relations

- I Department of State (Parts 1—199)
- II Agency for International Development (Parts 200—299)
- III Peace Corps (Parts 300—399)
- IV International Joint Commission, United States and Canada (Parts 400—499)
- V United States Agency for Global Media (Parts 500—599)
- VII U.S. International Development Finance Corporation (Parts 700—799)
- IX Foreign Service Grievance Board (Parts 900—999)
- X Inter-American Foundation (Parts 1000—1099)
- XI International Boundary and Water Commission, United States and Mexico, United States Section (Parts 1100—1199)

	Title 22—Foreign Relations—Continued
Chap.	
XII	United States International Development Cooperation Agency (Parts 1200—1299)
XIII	Millennium Challenge Corporation (Parts 1300—1399)
XIV	Foreign Service Labor Relations Board; Federal Labor Relations Authority; General Counsel of the Federal Labor Relations Authority; and the Foreign Service Impasse Disputes Panel (Parts 1400—1499)
XV	African Development Foundation (Parts 1500—1599)
XVI	Japan-United States Friendship Commission (Parts 1600—1699)
XVII	United States Institute of Peace (Parts 1700—1799)

Title 23—Highways

I	Federal Highway Administration, Department of Transportation (Parts 1—999)
II	National Highway Traffic Safety Administration and Federal Highway Administration, Department of Transportation (Parts 1200—1299)
III	National Highway Traffic Safety Administration, Department of Transportation (Parts 1300—1399)

Title 24—Housing and Urban Development

	SUBTITLE A—OFFICE OF THE SECRETARY, DEPARTMENT OF HOUSING AND URBAN DEVELOPMENT (PARTS 0—99)
	SUBTITLE B—REGULATIONS RELATING TO HOUSING AND URBAN DEVELOPMENT
I	Office of Assistant Secretary for Equal Opportunity, Department of Housing and Urban Development (Parts 100—199)
II	Office of Assistant Secretary for Housing-Federal Housing Commissioner, Department of Housing and Urban Development (Parts 200—299)
III	Government National Mortgage Association, Department of Housing and Urban Development (Parts 300—399)
IV	Office of Housing and Office of Multifamily Housing Assistance Restructuring, Department of Housing and Urban Development (Parts 400—499)
V	Office of Assistant Secretary for Community Planning and Development, Department of Housing and Urban Development (Parts 500—599)
VI	Office of Assistant Secretary for Community Planning and Development, Department of Housing and Urban Development (Parts 600—699) [Reserved]
VII	Office of the Secretary, Department of Housing and Urban Development (Housing Assistance Programs and Public and Indian Housing Programs) (Parts 700—799)

Title 24—Housing and Urban Development—Continued

Chap.

- VIII Office of the Assistant Secretary for Housing—Federal Housing Commissioner, Department of Housing and Urban Development (Section 8 Housing Assistance Programs, Section 202 Direct Loan Program, Section 202 Supportive Housing for the Elderly Program and Section 811 Supportive Housing for Persons With Disabilities Program) (Parts 800—899)
- IX Office of Assistant Secretary for Public and Indian Housing, Department of Housing and Urban Development (Parts 900—1699)
- X Office of Assistant Secretary for Housing—Federal Housing Commissioner, Department of Housing and Urban Development (Interstate Land Sales Registration Program) (Parts 1700—1799) [Reserved]
- XII Office of Inspector General, Department of Housing and Urban Development (Parts 2000—2099)
- XV Emergency Mortgage Insurance and Loan Programs, Department of Housing and Urban Development (Parts 2700—2799) [Reserved]
- XX Office of Assistant Secretary for Housing—Federal Housing Commissioner, Department of Housing and Urban Development (Parts 3200—3899)
- XXIV Board of Directors of the HOPE for Homeowners Program (Parts 4000—4099) [Reserved]
- XXV Neighborhood Reinvestment Corporation (Parts 4100—4199)

Title 25—Indians

- I Bureau of Indian Affairs, Department of the Interior (Parts 1—299)
- II Indian Arts and Crafts Board, Department of the Interior (Parts 300—399)
- III National Indian Gaming Commission, Department of the Interior (Parts 500—599)
- IV Office of Navajo and Hopi Indian Relocation (Parts 700—899)
- V Bureau of Indian Affairs, Department of the Interior, and Indian Health Service, Department of Health and Human Services (Part 900—999)
- VI Office of the Assistant Secretary, Indian Affairs, Department of the Interior (Parts 1000—1199)
- VII Office of the Special Trustee for American Indians, Department of the Interior (Parts 1200—1299)

Title 26—Internal Revenue

- I Internal Revenue Service, Department of the Treasury (Parts 1—End)

Title 27—Alcohol, Tobacco Products and Firearms

- I Alcohol and Tobacco Tax and Trade Bureau, Department of the Treasury (Parts 1—399)

Title 27—Alcohol, Tobacco Products and Firearms—Continued

Chap.

- II Bureau of Alcohol, Tobacco, Firearms, and Explosives, Department of Justice (Parts 400—799)

Title 28—Judicial Administration

- I Department of Justice (Parts 0—299)
- III Federal Prison Industries, Inc., Department of Justice (Parts 300—399)
- V Bureau of Prisons, Department of Justice (Parts 500—599)
- VI Offices of Independent Counsel, Department of Justice (Parts 600—699)
- VII Office of Independent Counsel (Parts 700—799)
- VIII Court Services and Offender Supervision Agency for the District of Columbia (Parts 800—899)
- IX National Crime Prevention and Privacy Compact Council (Parts 900—999)
- XI Department of Justice and Department of State (Parts 1100—1199)

Title 29—Labor

SUBTITLE A—OFFICE OF THE SECRETARY OF LABOR (PARTS 0—99)

SUBTITLE B—REGULATIONS RELATING TO LABOR

- I National Labor Relations Board (Parts 100—199)
- II Office of Labor-Management Standards, Department of Labor (Parts 200—299)
- III National Railroad Adjustment Board (Parts 300—399)
- IV Office of Labor-Management Standards, Department of Labor (Parts 400—499)
- V Wage and Hour Division, Department of Labor (Parts 500—899)
- IX Construction Industry Collective Bargaining Commission (Parts 900—999)
- X National Mediation Board (Parts 1200—1299)
- XII Federal Mediation and Conciliation Service (Parts 1400—1499)
- XIV Equal Employment Opportunity Commission (Parts 1600—1699)
- XVII Occupational Safety and Health Administration, Department of Labor (Parts 1900—1999)
- XX Occupational Safety and Health Review Commission (Parts 2200—2499)
- XXV Employee Benefits Security Administration, Department of Labor (Parts 2500—2599)
- XXVII Federal Mine Safety and Health Review Commission (Parts 2700—2799)
- XL Pension Benefit Guaranty Corporation (Parts 4000—4999)

Title 30—Mineral Resources

Chap.

- I Mine Safety and Health Administration, Department of Labor (Parts 1—199)
- II Bureau of Safety and Environmental Enforcement, Department of the Interior (Parts 200—299)
- IV Geological Survey, Department of the Interior (Parts 400—499)
- V Bureau of Ocean Energy Management, Department of the Interior (Parts 500—599)
- VII Office of Surface Mining Reclamation and Enforcement, Department of the Interior (Parts 700—999)
- XII Office of Natural Resources Revenue, Department of the Interior (Parts 1200—1299)

Title 31—Money and Finance: Treasury

SUBTITLE A—OFFICE OF THE SECRETARY OF THE TREASURY (PARTS 0—50)

SUBTITLE B—REGULATIONS RELATING TO MONEY AND FINANCE

- I Monetary Offices, Department of the Treasury (Parts 51—199)
- II Fiscal Service, Department of the Treasury (Parts 200—399)
- IV Secret Service, Department of the Treasury (Parts 400—499)
- V Office of Foreign Assets Control, Department of the Treasury (Parts 500—599)
- VI Bureau of Engraving and Printing, Department of the Treasury (Parts 600—699)
- VII Federal Law Enforcement Training Center, Department of the Treasury (Parts 700—799)
- VIII Office of Investment Security, Department of the Treasury (Parts 800—899)
- IX Federal Claims Collection Standards (Department of the Treasury—Department of Justice) (Parts 900—999)
- X Financial Crimes Enforcement Network, Department of the Treasury (Parts 1000—1099)

Title 32—National Defense

SUBTITLE A—DEPARTMENT OF DEFENSE

- I Office of the Secretary of Defense (Parts 1—399)
- V Department of the Army (Parts 400—699)
- VI Department of the Navy (Parts 700—799)
- VII Department of the Air Force (Parts 800—1099)

SUBTITLE B—OTHER REGULATIONS RELATING TO NATIONAL DEFENSE

- XII Department of Defense, Defense Logistics Agency (Parts 1200—1299)
- XVI Selective Service System (Parts 1600—1699)
- XVII Office of the Director of National Intelligence (Parts 1700—1799)
- XVIII National Counterintelligence Center (Parts 1800—1899)
- XIX Central Intelligence Agency (Parts 1900—1999)

Chap. **Title 32—National Defense—Continued**

- XX Information Security Oversight Office, National Archives and
 Records Administration (Parts 2000—2099)
- XXI National Security Council (Parts 2100—2199)
- XXIV Office of Science and Technology Policy (Parts 2400—2499)
- XXVII Office for Micronesian Status Negotiations (Parts 2700—2799)
- XXVIII Office of the Vice President of the United States (Parts 2800—
 2899)

Title 33—Navigation and Navigable Waters

- I Coast Guard, Department of Homeland Security (Parts 1—199)
- II Corps of Engineers, Department of the Army, Department of De-
 fense (Parts 200—399)
- IV Great Lakes St. Lawrence Seaway Development Corporation,
 Department of Transportation (Parts 400—499)

Title 34—Education

- SUBTITLE A—OFFICE OF THE SECRETARY, DEPARTMENT OF EDU-
CATION (PARTS 1—99)
- SUBTITLE B—REGULATIONS OF THE OFFICES OF THE DEPARTMENT
OF EDUCATION
- I Office for Civil Rights, Department of Education (Parts 100—199)
- II Office of Elementary and Secondary Education, Department of
 Education (Parts 200—299)
- III Office of Special Education and Rehabilitative Services, Depart-
 ment of Education (Parts 300—399)
- IV Office of Career, Technical, and Adult Education, Department of
 Education (Parts 400—499)
- V Office of Bilingual Education and Minority [Reserved]
- VI Office of Postsecondary Education, Department of Education
 (Parts 600—699)
- VII Office of Educational Research and Improvement, Department of
 Education (Parts 700—799) [Reserved]
- SUBTITLE C—REGULATIONS RELATING TO EDUCATION
- XI [Reserved]
- XII National Council on Disability (Parts 1200—1299)

Title 35 [Reserved]

Title 36—Parks, Forests, and Public Property

- I National Park Service, Department of the Interior (Parts 1—199)
- II Forest Service, Department of Agriculture (Parts 200—299)
- III Corps of Engineers, Department of the Army (Parts 300—399)
- IV American Battle Monuments Commission (Parts 400—499)
- V Smithsonian Institution (Parts 500—599)
- VI [Reserved]

Title 36—Parks, Forests, and Public Property—Continued

Chap.

- VII Library of Congress (Parts 700—799)
- VIII Advisory Council on Historic Preservation (Parts 800—899)
- IX Pennsylvania Avenue Development Corporation (Parts 900—999)
- X Presidio Trust (Parts 1000—1099)
- XI Architectural and Transportation Barriers Compliance Board (Parts 1100—1199)
- XII National Archives and Records Administration (Parts 1200—1299)
- XV Oklahoma City National Memorial Trust (Parts 1500—1599)
- XVI Morris K. Udall Scholarship and Excellence in National Environmental Policy Foundation (Parts 1600—1699)

Title 37—Patents, Trademarks, and Copyrights

- I United States Patent and Trademark Office, Department of Commerce (Parts 1—199)
- II U.S. Copyright Office, Library of Congress (Parts 200—299)
- III Copyright Royalty Board, Library of Congress (Parts 300—399)
- IV National Institute of Standards and Technology, Department of Commerce (Parts 400—599)

Title 38—Pensions, Bonuses, and Veterans' Relief

- I Department of Veterans Affairs (Parts 0—199)
- II Armed Forces Retirement Home (Parts 200—299)

Title 39—Postal Service

- I United States Postal Service (Parts 1—999)
- III Postal Regulatory Commission (Parts 3000—3099)

Title 40—Protection of Environment

- I Environmental Protection Agency (Parts 1—1099)
- IV Environmental Protection Agency and Department of Justice (Parts 1400—1499)
- V Council on Environmental Quality (Parts 1500—1599)
- VI Chemical Safety and Hazard Investigation Board (Parts 1600—1699)
- VII Environmental Protection Agency and Department of Defense; Uniform National Discharge Standards for Vessels of the Armed Forces (Parts 1700—1799)
- VIII Gulf Coast Ecosystem Restoration Council (Parts 1800—1899)
- IX Federal Permitting Improvement Steering Council (Part 1900)

Title 41—Public Contracts and Property Management

SUBTITLE A—FEDERAL PROCUREMENT REGULATIONS SYSTEM
[NOTE]

Title 41—Public Contracts and Property Management—Continued

Chap.	
	SUBTITLE B—OTHER PROVISIONS RELATING TO PUBLIC CONTRACTS
50	Public Contracts, Department of Labor (Parts 50–1—50–999)
51	Committee for Purchase From People Who Are Blind or Severely Disabled (Parts 51–1—51–99)
60	Office of Federal Contract Compliance Programs, Equal Employment Opportunity, Department of Labor (Parts 60–1—60–999)
61	Office of the Assistant Secretary for Veterans' Employment and Training Service, Department of Labor (Parts 61–1—61–999)
62—100	[Reserved]
	SUBTITLE C—FEDERAL PROPERTY MANAGEMENT REGULATIONS SYSTEM
101	Federal Property Management Regulations (Parts 101–1—101–99)
102	Federal Management Regulation (Parts 102–1—102–299)
103—104	[Reserved]
105	General Services Administration (Parts 105–1—105–999)
109	Department of Energy Property Management Regulations (Parts 109–1—109–99)
114	Department of the Interior (Parts 114–1—114–99)
115	Environmental Protection Agency (Parts 115–1—115–99)
128	Department of Justice (Parts 128–1—128–99)
129—200	[Reserved]
	SUBTITLE D—FEDERAL ACQUISITION SUPPLY CHAIN SECURITY
201	Federal Acquisition Security Council (Parts 201–1—201–99)
	SUBTITLE E [RESERVED]
	SUBTITLE F—FEDERAL TRAVEL REGULATION SYSTEM
300	General (Parts 300–1—300–99)
301	Temporary Duty (TDY) Travel Allowances (Parts 301–1—301–99)
302	Relocation Allowances (Parts 302–1—302–99)
303	Payment of Expenses Connected with the Death of Certain Employees (Part 303–1—303–99)
304	Payment of Travel Expenses from a Non-Federal Source (Parts 304–1—304–99)

Title 42—Public Health

I	Public Health Service, Department of Health and Human Services (Parts 1—199)
II—III	[Reserved]
IV	Centers for Medicare & Medicaid Services, Department of Health and Human Services (Parts 400—699)
V	Office of Inspector General-Health Care, Department of Health and Human Services (Parts 1000—1099)

Title 43—Public Lands: Interior

	SUBTITLE A—OFFICE OF THE SECRETARY OF THE INTERIOR (PARTS 1—199)

Chap. **Title 43—Public Lands: Interior—Continued**

SUBTITLE B—REGULATIONS RELATING TO PUBLIC LANDS

- I Bureau of Reclamation, Department of the Interior (Parts 400—999)
- II Bureau of Land Management, Department of the Interior (Parts 1000—9999)
- III Utah Reclamation Mitigation and Conservation Commission (Parts 10000—10099)

Title 44—Emergency Management and Assistance

- I Federal Emergency Management Agency, Department of Homeland Security (Parts 0—399)
- IV Department of Commerce and Department of Transportation (Parts 400—499)

Title 45—Public Welfare

SUBTITLE A—DEPARTMENT OF HEALTH AND HUMAN SERVICES (PARTS 1—199)

SUBTITLE B—REGULATIONS RELATING TO PUBLIC WELFARE

- II Office of Family Assistance (Assistance Programs), Administration for Children and Families, Department of Health and Human Services (Parts 200—299)
- III Office of Child Support Services, Administration of Families and Services, Department of Health and Human Services (Parts 300—399)
- IV Office of Refugee Resettlement, Administration for Children and Families, Department of Health and Human Services (Parts 400—499)
- V Foreign Claims Settlement Commission of the United States, Department of Justice (Parts 500—599)
- VI National Science Foundation (Parts 600—699)
- VII Commission on Civil Rights (Parts 700—799)
- VIII Office of Personnel Management (Parts 800—899)
- IX Denali Commission (Parts 900—999)
- X Office of Community Services, Administration for Children and Families, Department of Health and Human Services (Parts 1000—1099)
- XI National Foundation on the Arts and the Humanities (Parts 1100—1199)
- XII Corporation for National and Community Service (Parts 1200—1299)
- XIII Administration for Children and Families, Department of Health and Human Services (Parts 1300—1399)
- XVI Legal Services Corporation (Parts 1600—1699)
- XVII National Commission on Libraries and Information Science (Parts 1700—1799)
- XVIII Harry S. Truman Scholarship Foundation (Parts 1800—1899)
- XXI Commission of Fine Arts (Parts 2100—2199)

Title 45—Public Welfare—Continued

Chap.	
XXIII	Arctic Research Commission (Parts 2300—2399)
XXIV	James Madison Memorial Fellowship Foundation (Parts 2400—2499)
XXV	Corporation for National and Community Service (Parts 2500—2599)

Title 46—Shipping

I	Coast Guard, Department of Homeland Security (Parts 1—199)
II	Maritime Administration, Department of Transportation (Parts 200—399)
III	Coast Guard (Great Lakes Pilotage), Department of Homeland Security (Parts 400—499)
IV	Federal Maritime Commission (Parts 500—599)

Title 47—Telecommunication

I	Federal Communications Commission (Parts 0—199)
II	Office of Science and Technology Policy and National Security Council (Parts 200—299)
III	National Telecommunications and Information Administration, Department of Commerce (Parts 300—399)
IV	National Telecommunications and Information Administration, Department of Commerce, and National Highway Traffic Safety Administration, Department of Transportation (Parts 400—499)
V	The First Responder Network Authority (Parts 500—599)

Title 48—Federal Acquisition Regulations System

1	Federal Acquisition Regulation (Parts 1—99)
2	Defense Acquisition Regulations System, Department of Defense (Parts 200—299)
3	Health and Human Services (Parts 300—399)
4	Department of Agriculture (Parts 400—499)
5	General Services Administration (Parts 500—599)
6	Department of State (Parts 600—699)
7	Agency for International Development (Parts 700—799)
8	Department of Veterans Affairs (Parts 800—899)
9	Department of Energy (Parts 900—999)
10	Department of the Treasury (Parts 1000—1099)
12	Department of Transportation (Parts 1200—1299)
13	Department of Commerce (Parts 1300—1399)
14	Department of the Interior (Parts 1400—1499)
15	Environmental Protection Agency (Parts 1500—1599)
16	Office of Personnel Management, Federal Employees Health Benefits Acquisition Regulation (Parts 1600—1699)
17	Office of Personnel Management (Parts 1700—1799)

Title 48—Federal Acquisition Regulations System—Continued

Chap.

- 18 National Aeronautics and Space Administration (Parts 1800—1899)
- 19 Broadcasting Board of Governors (Parts 1900—1999)
- 20 Nuclear Regulatory Commission (Parts 2000—2099)
- 21 Office of Personnel Management, Federal Employees Group Life Insurance Federal Acquisition Regulation (Parts 2100—2199)
- 23 Social Security Administration (Parts 2300—2399)
- 24 Department of Housing and Urban Development (Parts 2400—2499)
- 25 National Science Foundation (Parts 2500—2599)
- 28 Department of Justice (Parts 2800—2899)
- 29 Department of Labor (Parts 2900—2999)
- 30 Department of Homeland Security, Homeland Security Acquisition Regulation (HSAR) (Parts 3000—3099)
- 34 Department of Education Acquisition Regulation (Parts 3400—3499)
- 51 Department of the Army Acquisition Regulations (Parts 5100—5199) [Reserved]
- 52 Department of the Navy Acquisition Regulations (Parts 5200—5299)
- 53 Department of the Air Force Federal Acquisition Regulation Supplement (Parts 5300—5399) [Reserved]
- 54 Defense Logistics Agency, Department of Defense (Parts 5400—5499)
- 57 African Development Foundation (Parts 5700—5799)
- 61 Civilian Board of Contract Appeals, General Services Administration (Parts 6100—6199)
- 99 Cost Accounting Standards Board, Office of Federal Procurement Policy, Office of Management and Budget (Parts 9900—9999)

Title 49—Transportation

SUBTITLE A—OFFICE OF THE SECRETARY OF TRANSPORTATION
(PARTS 1—99)

SUBTITLE B—OTHER REGULATIONS RELATING TO TRANSPORTATION

- I Pipeline and Hazardous Materials Safety Administration, Department of Transportation (Parts 100—199)
- II Federal Railroad Administration, Department of Transportation (Parts 200—299)
- III Federal Motor Carrier Safety Administration, Department of Transportation (Parts 300—399)
- IV Coast Guard, Department of Homeland Security (Parts 400—499)
- V National Highway Traffic Safety Administration, Department of Transportation (Parts 500—599)
- VI Federal Transit Administration, Department of Transportation (Parts 600—699)
- VII National Railroad Passenger Corporation (AMTRAK) (Parts 700—799)

Title 49—Transportation—Continued

Chap.

- VIII National Transportation Safety Board (Parts 800—999)
- X Surface Transportation Board (Parts 1000—1399)
- XI Research and Innovative Technology Administration, Department of Transportation (Parts 1400—1499) [Reserved]
- XII Transportation Security Administration, Department of Homeland Security (Parts 1500—1699)

Title 50—Wildlife and Fisheries

- I United States Fish and Wildlife Service, Department of the Interior (Parts 1—199)
- II National Marine Fisheries Service, National Oceanic and Atmospheric Administration, Department of Commerce (Parts 200—299)
- III International Fishing and Related Activities (Parts 300—399)
- IV Joint Regulations (United States Fish and Wildlife Service, Department of the Interior and National Marine Fisheries Service, National Oceanic and Atmospheric Administration, Department of Commerce); Endangered Species Committee Regulations (Parts 400—499)
- V Marine Mammal Commission (Parts 500—599)
- VI Fishery Conservation and Management, National Oceanic and Atmospheric Administration, Department of Commerce (Parts 600—699)

Alphabetical List of Agencies Appearing in the CFR

(Revised as of July 1, 2024)

Agency	CFR Title, Subtitle or Chapter
Administrative Conference of the United States	1, III
Advisory Council on Historic Preservation	36, VIII
Advocacy and Outreach, Office of	7, XXV
Afghanistan Reconstruction, Special Inspector General for	5, LXXXIII
African Development Foundation	22, XV
Federal Acquisition Regulation	48, 57
Agency for International Development	2, VII; 22, II
Federal Acquisition Regulation	48, 7
Agricultural Marketing Service	7, I, VIII, IX, X, XI; 9, II
Agricultural Research Service	7, V
Agriculture, Department of	2, IV; 5, LXXXIII
Advocacy and Outreach, Office of	7, XXV
Agricultural Marketing Service	7, I, VIII, IX, X, XI; 9, II
Agricultural Research Service	7, V
Animal and Plant Health Inspection Service	7, III; 9, I
Chief Financial Officer, Office of	7, XXX
Commodity Credit Corporation	7, XIV
Economic Research Service	7, XXXVII
Energy Policy and New Uses, Office of	2, IX; 7, XXIX
Environmental Quality, Office of	7, XXXI
Farm Service Agency	7, VII, XVIII
Federal Acquisition Regulation	48, 4
Federal Crop Insurance Corporation	7, IV
Food and Nutrition Service	7, II
Food Safety and Inspection Service	9, III
Foreign Agricultural Service	7, XV
Forest Service	36, II
Information Resources Management, Office of	7, XXVII
Inspector General, Office of	7, XXVI
National Agricultural Library	7, XLI
National Agricultural Statistics Service	7, XXXVI
National Institute of Food and Agriculture	7, XXXIV
Natural Resources Conservation Service	7, VI
Operations, Office of	7, XXVIII
Procurement and Property Management, Office of	7, XXXII
Rural Business-Cooperative Service	7, XVIII, XLII
Rural Development Administration	7, XLII
Rural Housing Service	7, XVIII, XXXV
Rural Utilities Service	7, XVII, XVIII, XLII
Secretary of Agriculture, Office of	7, Subtitle A
Transportation, Office of	7, XXXIII
World Agricultural Outlook Board	7, XXXVIII
Air Force, Department of	32, VII
Federal Acquisition Regulation Supplement	48, 53
Air Transportation Stabilization Board	14, VI
Alcohol and Tobacco Tax and Trade Bureau	27, I
Alcohol, Tobacco, Firearms, and Explosives, Bureau of	27, II
AMTRAK	49, VII
American Battle Monuments Commission	36, IV
American Indians, Office of the Special Trustee	25, VII
Animal and Plant Health Inspection Service	7, III; 9, I
Appalachian Regional Commission	5, IX
Architectural and Transportation Barriers Compliance Board	36, XI

Agency	CFR Title, Subtitle or Chapter
Arctic Research Commission	45, XXIII
Armed Forces Retirement Home	5, XI; 38, II
Army, Department of	32, V
Engineers, Corps of	33, II; 36, III
Federal Acquisition Regulation	48, 51
Benefits Review Board	20, VII
Bilingual Education and Minority Languages Affairs, Office of	34, V
Blind or Severely Disabled, Committee for Purchase from People Who Are	41, 51
Federal Acquisition Regulation	48, 19
Career, Technical, and Adult Education, Office of	34, IV
Census Bureau	15, I
Centers for Medicare & Medicaid Services	42, IV
Central Intelligence Agency	32, XIX
Chemical Safety and Hazard Investigation Board	40, VI
Chief Financial Officer, Office of	7, XXX
Child Support Services, Office of	45, III
Children and Families, Administration for	45, II, IV, X, XIII
Civil Rights, Commission on	5, LXVIII; 45, VII
Civil Rights, Office for	34, I
Coast Guard	33, I; 46, I; 49, IV
Coast Guard (Great Lakes Pilotage)	46, III
Commerce, Department of	2, XIII; 44, IV; 50, VI
Census Bureau	15, I
Economic Affairs, Office of the Under-Secretary for	15, XV
Economic Analysis, Bureau of	15, VIII
Economic Development Administration	13, III
Emergency Management and Assistance	44, IV
Federal Acquisition Regulation	48, 13
Foreign-Trade Zones Board	15, IV
Industry and Security, Bureau of	15, VII
International Trade Administration	15, III; 19, III
National Institute of Standards and Technology	15, II; 37, IV
National Marine Fisheries Service	50, II, IV
National Oceanic and Atmospheric Administration	15, IX; 50, II, III, IV, VI
National Technical Information Service	15, XI
National Telecommunications and Information Administration	15, XXIII; 47, III, IV
National Weather Service	15, IX
Patent and Trademark Office, United States	37, I
Secretary of Commerce, Office of	15, Subtitle A
Commercial Space Transportation	14, III
Commodity Credit Corporation	7, XIV
Commodity Futures Trading Commission	5, XLI; 17, I
Community Planning and Development, Office of Assistant Secretary for	24, V, VI
Community Services, Office of	45, X
Comptroller of the Currency	12, I
Construction Industry Collective Bargaining Commission	29, IX
Consumer Financial Protection Bureau	5, LXXXIV; 12, X
Consumer Product Safety Commission	5, LXXI; 16, II
Copyright Royalty Board	37, III
Corporation for National and Community Service	2, XXII; 45, XII, XXV
Cost Accounting Standards Board	48, 99
Council on Environmental Quality	40, V
Council of the Inspectors General on Integrity and Efficiency	5, XCVIII
Court Services and Offender Supervision Agency for the District of Columbia	5, LXX; 28, VIII
Customs and Border Protection	19, I
Defense, Department of	2, XI; 5, XXVI; 32, Subtitle A; 40, VII
Advanced Research Projects Agency	32, I
Air Force Department	32, VII
Army Department	32, V; 33, II; 36, III; 48, 51
Defense Acquisition Regulations System	48, 2
Defense Intelligence Agency	32, I

Agency	CFR Title, Subtitle or Chapter
Defense Logistics Agency	32, I, XII; 48, 54
Engineers, Corps of	33, II; 36, III
National Imagery and Mapping Agency	32, I
Navy, Department of	32, VI; 48, 52
Secretary of Defense, Office of	2, XI; 32, I
Defense Contract Audit Agency	32, I
Defense Intelligence Agency	32, I
Defense Logistics Agency	32, XII; 48, 54
Defense Nuclear Facilities Safety Board	10, XVII
Delaware River Basin Commission	18, III
Denali Commission	45, IX
Disability, National Council on	5, C; 34, XII
District of Columbia, Court Services and Offender Supervision Agency for the	5, LXX; 28, VIII
Drug Enforcement Administration	21, II
East-West Foreign Trade Board	15, XIII
Economic Affairs, Office of the Under-Secretary for	15, XV
Economic Analysis, Bureau of	15, VIII
Economic Development Administration	13, III
Economic Research Service	7, XXXVII
Education, Department of	2, XXXIV; 5, LIII
Bilingual Education and Minority Languages Affairs, Office of	34, V
Career, Technical, and Adult Education, Office of	34, IV
Civil Rights, Office for	34, I
Educational Research and Improvement, Office of	34, VII
Elementary and Secondary Education, Office of	34, II
Federal Acquisition Regulation	48, 34
Postsecondary Education, Office of	34, VI
Secretary of Education, Office of	34, Subtitle A
Special Education and Rehabilitative Services, Office of	34, III
Educational Research and Improvement, Office of	34, VII
Election Assistance Commission	2, LVIII; 11, II
Elementary and Secondary Education, Office of	34, II
Emergency Oil and Gas Guaranteed Loan Board	13, V
Emergency Steel Guarantee Loan Board	13, IV
Employee Benefits Security Administration	29, XXV
Employees' Compensation Appeals Board	20, IV
Employees Loyalty Board	5, V
Employment and Training Administration	20, V
Employment Policy, National Commission for	1, IV
Employment Standards Administration	20, VI
Endangered Species Committee	50, IV
Energy, Department of	2, IX; 5, XXIII; 10, II, III, X
Federal Acquisition Regulation	48, 9
Federal Energy Regulatory Commission	5, XXIV; 18, I
Property Management Regulations	41, 109
Energy, Office of	7, XXIX
Engineers, Corps of	33, II; 36, III
Engraving and Printing, Bureau of	31, VI
Environmental Protection Agency	2, XV; 5, LIV; 40, I, IV, VII
Federal Acquisition Regulation	48, 15
Property Management Regulations	41, 115
Environmental Quality, Office of	7, XXXI
Equal Employment Opportunity Commission	5, LXII; 29, XIV
Equal Opportunity, Office of Assistant Secretary for	24, I
Executive Office of the President	3, I
Environmental Quality, Council on	40, V
Management and Budget, Office of	2, Subtitle A; 5, III, LXXXVII; 14, VI; 48, 99
National Drug Control Policy, Office of	2, XXXVI; 21, III
National Security Council	32, XXI; 47, II
Presidential Documents	3
Science and Technology Policy, Office of	32, XXIV; 47, II
Trade Representative, Office of the United States	15, XX

Agency	CFR Title, Subtitle or Chapter
Export-Import Bank of the United States	2, XXXV; 5, LII; 12, IV
Families and Services, Administration of	45, III
Family Assistance, Office of	45, II
Farm Credit Administration	5, XXXI; 12, VI
Farm Credit System Insurance Corporation	5, XXX; 12, XIV
Farm Service Agency	7, VII, XVIII
Federal Acquisition Regulation	48, 1
Federal Acquisition Security Council	41, 201
Federal Aviation Administration	14, I
Commercial Space Transportation	14, III
Federal Claims Collection Standards	31, IX
Federal Communications Commission	2, LX; 5, XXIX; 47, I
Federal Contract Compliance Programs, Office of	41, 60
Federal Crop Insurance Corporation	7, IV
Federal Deposit Insurance Corporation	5, XXII; 12, III
Federal Election Commission	5, XXXVII; 11, I
Federal Emergency Management Agency	44, I
Federal Employees Group Life Insurance Federal Acquisition Regulation	48, 21
Federal Employees Health Benefits Acquisition Regulation	48, 16
Federal Energy Regulatory Commission	5, XXIV; 18, I
Federal Financial Institutions Examination Council	12, XI
Federal Financing Bank	12, VIII
Federal Highway Administration	23, I, II
Federal Home Loan Mortgage Corporation	1, IV
Federal Housing Enterprise Oversight Office	12, XVII
Federal Housing Finance Agency	5, LXXX; 12, XII
Federal Labor Relations Authority	5, XIV, XLIX; 22, XIV
Federal Law Enforcement Training Center	31, VII
Federal Management Regulation	41, 102
Federal Maritime Commission	46, IV
Federal Mediation and Conciliation Service	5, CIII; 29, XII
Federal Mine Safety and Health Review Commission	5, LXXIV; 29, XXVII
Federal Motor Carrier Safety Administration	49, III
Federal Permitting Improvement Steering Council	40, IX
Federal Prison Industries, Inc.	28, III
Federal Procurement Policy Office	48, 99
Federal Property Management Regulations	41, 101
Federal Railroad Administration	49, II
Federal Register, Administrative Committee of	1, I
Federal Register, Office of	1, II
Federal Reserve System	12, II
Board of Governors	5, LVIII
Federal Retirement Thrift Investment Board	5, VI, LXXXVI
Federal Service Impasses Panel	5, XIV
Federal Trade Commission	5, XLVII; 16, I
Federal Transit Administration	49, VI
Federal Travel Regulation System	41, Subtitle F
Financial Crimes Enforcement Network	31, X
Financial Research Office	12, XVI
Financial Stability Oversight Council	12, XIII
Fine Arts, Commission of	45, XXI
Fiscal Service	31, II
Fish and Wildlife Service, United States	50, I, IV
Food and Drug Administration	21, I
Food and Nutrition Service	7, II
Food Safety and Inspection Service	9, III
Foreign Agricultural Service	7, XV
Foreign Assets Control, Office of	31, V
Foreign Claims Settlement Commission of the United States	45, V
Foreign Service Grievance Board	22, IX
Foreign Service Impasse Disputes Panel	22, XIV
Foreign Service Labor Relations Board	22, XIV
Foreign-Trade Zones Board	15, IV
Forest Service	36, II
General Services Administration	5, LVII; 41, 105
Contract Appeals, Board of	48, 61

Agency	CFR Title, Subtitle or Chapter
Federal Acquisition Regulation	48, 5
Federal Management Regulation	41, 102
Federal Property Management Regulations	41, 101
Federal Travel Regulation System	41, Subtitle F
General	41, 300
Payment From a Non-Federal Source for Travel Expenses	41, 304
Payment of Expenses Connected With the Death of Certain Employees	41, 303
Relocation Allowances	41, 302
Temporary Duty (TDY) Travel Allowances	41, 301
Geological Survey	30, IV
Government Accountability Office	4, I
Government Ethics, Office of	5, XVI
Government National Mortgage Association	24, III
Grain Inspection, Packers and Stockyards Administration	7, VIII; 9, II
Great Lakes St. Lawrence Seaway Development Corporation	33, IV
Gulf Coast Ecosystem Restoration Council	2, LIX; 40, VIII
Harry S. Truman Scholarship Foundation	45, XVIII
Health and Human Services, Department of	2, III; 5, XLV; 45, Subtitle A
Centers for Medicare & Medicaid Services	42, IV
Child Support Services, Office of	45, III
Children and Families, Administration for	45, II, IV, X, XIII
Community Services, Office of	45, X
Families and Services, Administration of	45, III
Family Assistance, Office of	45, II
Federal Acquisition Regulation	48, 3
Food and Drug Administration	21, I
Indian Health Service	25, V
Inspector General (Health Care), Office of	42, V
Public Health Service	42, I
Refugee Resettlement, Office of	45, IV
Homeland Security, Department of	2, XXX; 5, XXXVI; 6, I; 8, I
Coast Guard	33, I; 46, I; 49, IV
Coast Guard (Great Lakes Pilotage)	46, III
Customs and Border Protection	19, I
Federal Emergency Management Agency	44, I
Human Resources Management and Labor Relations Systems	5, XCVII
Immigration and Customs Enforcement Bureau	19, IV
Transportation Security Administration	49, XII
HOPE for Homeowners Program, Board of Directors of	24, XXIV
Housing and Urban Development, Department of	2, XXIV; 5, LXV; 24, Subtitle B
Community Planning and Development, Office of Assistant Secretary for	24, V, VI
Equal Opportunity, Office of Assistant Secretary for	24, I
Federal Acquisition Regulation	48, 24
Federal Housing Enterprise Oversight, Office of	12, XVII
Government National Mortgage Association	24, III
Housing—Federal Housing Commissioner, Office of Assistant Secretary for	24, II, VIII, X, XX
Housing, Office of, and Multifamily Housing Assistance Restructuring, Office of	24, IV
Inspector General, Office of	24, XII
Public and Indian Housing, Office of Assistant Secretary for	24, IX
Secretary, Office of	24, Subtitle A, VII
Housing—Federal Housing Commissioner, Office of Assistant Secretary for	24, II, VIII, X, XX
Housing, Office of, and Multifamily Housing Assistance Restructuring, Office of	24, IV
Immigration and Customs Enforcement Bureau	19, IV
Immigration Review, Executive Office for	8, V
Independent Counsel, Office of	28, VII
Independent Counsel, Offices of	28, VI
Indian Affairs, Bureau of	25, I, V

Agency	CFR Title, Subtitle or Chapter
Indian Affairs, Office of the Assistant Secretary	25, VI
Indian Arts and Crafts Board	25, II
Indian Health Service	25, V
Industry and Security, Bureau of	15, VII
Information Resources Management, Office of	7, XXVII
Information Security Oversight Office, National Archives and Records Administration	32, XX
Inspector General	
Agriculture Department	7, XXVI
Health and Human Services Department	42, V
Housing and Urban Development Department	24, XII, XV
Institute of Peace, United States	22, XXVII
Intellectual Property Enforcement Coordinator, Office of	5, CIV
Inter-American Foundation	5, LXIII; 22, X
Interior, Department of	2, XIV
American Indians, Office of the Special Trustee	25, VII
Endangered Species Committee	50, IV
Federal Acquisition Regulation	48, 14
Federal Property Management Regulations System	41, 114
Fish and Wildlife Service, United States	50, I, IV
Geological Survey	30, IV
Indian Affairs, Bureau of	25, I, V
Indian Affairs, Office of the Assistant Secretary	25, VI
Indian Arts and Crafts Board	25, II
Land Management, Bureau of	43, II
National Indian Gaming Commission	25, III
National Park Service	36, I
Natural Resource Revenue, Office of	30, XII
Ocean Energy Management, Bureau of	30, V
Reclamation, Bureau of	43, I
Safety and Environmental Enforcement, Bureau of	30, II
Secretary of the Interior, Office of	2, XIV; 43, Subtitle A
Surface Mining Reclamation and Enforcement, Office of	30, VII
Internal Revenue Service	26, I
International Boundary and Water Commission, United States and Mexico, United States Section	22, XI
International Development, United States Agency for	22, II
Federal Acquisition Regulation	48, 7
International Development Cooperation Agency, United States	22, XII
International Development Finance Corporation, U.S.	2, XVI; 5, XXXIII; 22, VII
International Joint Commission, United States and Canada	22, IV
International Organizations Employees Loyalty Board	5, V
International Trade Administration	15, III; 19, III
International Trade Commission, United States	19, II
Interstate Commerce Commission	5, XL
Investment Security, Office of	31, VIII
James Madison Memorial Fellowship Foundation	45, XXIV
Japan–United States Friendship Commission	22, XVI
Joint Board for the Enrollment of Actuaries	20, VIII
Justice, Department of	2, XXVIII; 5, XXVIII; 28, I, XI; 40, IV
Alcohol, Tobacco, Firearms, and Explosives, Bureau of	27, II
Drug Enforcement Administration	21, II
Federal Acquisition Regulation	48, 28
Federal Claims Collection Standards	31, IX
Federal Prison Industries, Inc.	28, III
Foreign Claims Settlement Commission of the United States	45, V
Immigration Review, Executive Office for	8, V
Independent Counsel, Offices of	28, VI
Prisons, Bureau of	28, V
Property Management Regulations	41, 128
Labor, Department of	2, XXIX; 5, XLII
Benefits Review Board	20, VII
Employee Benefits Security Administration	29, XXV

Agency	CFR Title, Subtitle or Chapter
Employees' Compensation Appeals Board	20, IV
Employment and Training Administration	20, V
Federal Acquisition Regulation	48, 29
Federal Contract Compliance Programs, Office of	41, 60
Federal Procurement Regulations System	41, 50
Labor-Management Standards, Office of	29, II, IV
Mine Safety and Health Administration	30, I
Occupational Safety and Health Administration	29, XVII
Public Contracts	41, 50
Secretary of Labor, Office of	29, Subtitle A
Veterans' Employment and Training Service, Office of the Assistant Secretary for	41, 61; 20, IX
Wage and Hour Division	29, V
Workers' Compensation Programs, Office of	20, I, VI
Labor-Management Standards, Office of	29, II, IV
Land Management, Bureau of	43, II
Legal Services Corporation	45, XVI
Libraries and Information Science, National Commission on	45, XVII
Library of Congress	36, VII
Copyright Royalty Board	37, III
U.S. Copyright Office	37, II
Management and Budget, Office of	5, III, LXXVII; 14, VI; 48, 99
Marine Mammal Commission	50, V
Maritime Administration	46, II
Merit Systems Protection Board	5, II, LXIV
Micronesia Status Negotiations, Office for	32, XXXVII
Military Compensation and Retirement Modernization Commission	5, XCIX
Millennium Challenge Corporation	22, XIII
Mine Safety and Health Administration	30, I
Minority Business Development Agency	15, XIV
Miscellaneous Agencies	1, IV
Monetary Offices	31, I
Morris K. Udall Scholarship and Excellence in National Environmental Policy Foundation	36, XVI
Museum and Library Services, Institute of	2, XXXI
National Aeronautics and Space Administration	2, XVIII; 5, LIX; 14, V
Federal Acquisition Regulation	48, 18
National Agricultural Library	7, XLI
National Agricultural Statistics Service	7, XXXVI
National and Community Service, Corporation for	2, XXII; 45, XII, XXV
National Archives and Records Administration	2, XXVI; 5, LXVI; 36, XII
Information Security Oversight Office	32, XX
National Capital Planning Commission	1, IV, VI
National Counterintelligence Center	32, XVIII
National Credit Union Administration	5, LXXXVI; 12, VII
National Crime Prevention and Privacy Compact Council	28, IX
National Drug Control Policy, Office of	2, XXXVI; 21, III
National Endowment for the Arts	2, XXXII
National Endowment for the Humanities	2, XXXIII
National Foundation on the Arts and the Humanities	45, XI
National Geospatial-Intelligence Agency	32, I
National Highway Traffic Safety Administration	23, II, III; 47, VI; 49, V
National Imagery and Mapping Agency	32, I
National Indian Gaming Commission	25, III
National Institute of Food and Agriculture	7, XXXIV
National Institute of Standards and Technology	15, II; 37, IV
National Intelligence, Office of Director of	5, IV; 32, XVII
National Labor Relations Board	5, LXI; 29, I
National Marine Fisheries Service	50, II, IV
National Mediation Board	5, CI; 29, X
National Oceanic and Atmospheric Administration	15, IX; 50, II, III, IV, VI
National Park Service	36, I
National Railroad Adjustment Board	29, III
National Railroad Passenger Corporation (AMTRAK)	49, VII

Agency	CFR Title, Subtitle or Chapter
National Science Foundation	2, XXV; 5, XLIII; 45, VI
Federal Acquisition Regulation	48, 25
National Security Council	32, XXI; 47, II
National Technical Information Service	15, XI
National Telecommunications and Information Administration	15, XXIII; 47, III, IV, V
National Transportation Safety Board	49, VIII
Natural Resource Revenue, Office of	30, XII
Natural Resources Conservation Service	7, VI
Navajo and Hopi Indian Relocation, Office of	25, IV
Navy, Department of	32, VI
Federal Acquisition Regulation	48, 52
Neighborhood Reinvestment Corporation	24, XXV
Northeast Interstate Low-Level Radioactive Waste Commission	10, XVIII
Nuclear Regulatory Commission	2, XX; 5, XLVIII; 10, I
Federal Acquisition Regulation	48, 20
Occupational Safety and Health Administration	29, XVII
Occupational Safety and Health Review Commission	29, XX
Ocean Energy Management, Bureau of	30, V
Oklahoma City National Memorial Trust	36, XV
Operations Office	7, XXVIII
Patent and Trademark Office, United States	37, I
Payment From a Non-Federal Source for Travel Expenses	41, 304
Payment of Expenses Connected With the Death of Certain Employees	41, 303
Peace Corps	2, XXXVII; 22, III
Pennsylvania Avenue Development Corporation	36, IX
Pension Benefit Guaranty Corporation	29, XL
Personnel Management, Office of	5, I, IV, XXXV; 45, VIII
Federal Acquisition Regulation	48, 17
Federal Employees Group Life Insurance Federal Acquisition Regulation	48, 21
Federal Employees Health Benefits Acquisition Regulation	48, 16
Human Resources Management and Labor Relations Systems, Department of Homeland Security	5, XCVII
Pipeline and Hazardous Materials Safety Administration	49, I
Postal Regulatory Commission	5, XLVI; 39, III
Postal Service, United States	5, LX; 39, I
Postsecondary Education, Office of	34, VI
President's Commission on White House Fellowships	1, IV
Presidential Documents	3
Presidio Trust	36, X
Prisons, Bureau of	28, V
Privacy and Civil Liberties Oversight Board	6, X
Procurement and Property Management, Office of	7, XXXII
Public and Indian Housing, Office of Assistant Secretary for	24, IX
Public Contracts, Department of Labor	41, 50
Public Health Service	42, I
Railroad Retirement Board	20, II
Reclamation, Bureau of	43, I
Refugee Resettlement, Office of	45, IV
Relocation Allowances	41, 302
Research and Innovative Technology Administration	49, XI
Rural Business-Cooperative Service	7, XVIII, XLII, L
Rural Housing Service	7, XVIII, XXXV, L
Rural Utilities Service	7, XVII, XVIII, XLII, L
Safety and Environmental Enforcement, Bureau of	30, II
Science and Technology Policy, Office of	32, XXIV; 47, II
Secret Service	31, IV
Securities and Exchange Commission	5, XXXIV; 17, II
Selective Service System	32, XVI
Small Business Administration	2, XXVII; 13, I
Smithsonian Institution	36, V
Social Security Administration	2, XXIII; 20, III; 48, 23
Soldiers' and Airmen's Home, United States	5, XI
Special Counsel, Office of	5, VIII

Agency	CFR Title, Subtitle or Chapter
Special Education and Rehabilitative Services, Office of	34, III
State, Department of	2, VI; 22, I; 28, XI
Federal Acquisition Regulation	48, 6
Surface Mining Reclamation and Enforcement, Office of	30, VII
Surface Transportation Board	49, X
Susquehanna River Basin Commission	18, VIII
Tennessee Valley Authority	5, LXIX; 18, XIII
Trade Representative, United States, Office of	15, XX
Transportation, Department of	2, XII; 5, L
Commercial Space Transportation	14, III
Emergency Management and Assistance	44, IV
Federal Acquisition Regulation	48, 12
Federal Aviation Administration	14, I
Federal Highway Administration	23, I, II
Federal Motor Carrier Safety Administration	49, III
Federal Railroad Administration	49, II
Federal Transit Administration	49, VI
Great Lakes St. Lawrence Seaway Development Corporation	33, IV
Maritime Administration	46, II
National Highway Traffic Safety Administration	23, II, III; 47, IV; 49, V
Pipeline and Hazardous Materials Safety Administration	49, I
Secretary of Transportation, Office of	14, II; 49, Subtitle A
Transportation Statistics Bureau	49, XI
Transportation, Office of	7, XXXIII
Transportation Security Administration	49, XII
Transportation Statistics Bureau	49, XI
Travel Allowances, Temporary Duty (TDY)	41, 301
Treasury, Department of the	2, X; 5, XXI; 12, XV; 17, IV; 31, IX
Alcohol and Tobacco Tax and Trade Bureau	27, I
Community Development Financial Institutions Fund	12, XVIII
Comptroller of the Currency	12, I
Customs and Border Protection	19, I
Engraving and Printing, Bureau of	31, VI
Federal Acquisition Regulation	48, 10
Federal Claims Collection Standards	31, IX
Federal Law Enforcement Training Center	31, VII
Financial Crimes Enforcement Network	31, X
Fiscal Service	31, II
Foreign Assets Control, Office of	31, V
Internal Revenue Service	26, I
Investment Security, Office of	31, VIII
Monetary Offices	31, I
Secret Service	31, IV
Secretary of the Treasury, Office of	31, Subtitle A
Truman, Harry S. Scholarship Foundation	45, XVIII
United States Agency for Global Media	22, V
United States and Canada, International Joint Commission	22, IV
United States and Mexico, International Boundary and Water Commission, United States Section	22, XI
U.S. Copyright Office	37, II
U.S. Office of Special Counsel	5, CII
Utah Reclamation Mitigation and Conservation Commission	43, III
Veterans Affairs, Department of	2, VIII; 38, I
Federal Acquisition Regulation	48, 8
Veterans' Employment and Training Service, Office of the Assistant Secretary for	41, 61; 20, IX
Vice President of the United States, Office of	32, XXVIII
Wage and Hour Division	29, V
Water Resources Council	18, VI
Workers' Compensation Programs, Office of	20, I, VI
World Agricultural Outlook Board	7, XXXVIII

List of CFR Sections Affected

All changes in this volume of the Code of Federal Regulations (CFR) that were made by documents published in the FEDERAL REGISTER since January 1, 2019 are enumerated in the following list. Entries indicate the nature of the changes effected. Page numbers refer to FEDERAL REGISTER pages. The user should consult the entries for chapters, parts and subparts as well as sections for revisions.

For changes to this volume of the CFR prior to this listing, consult the annual edition of the monthly List of CFR Sections Affected (LSA). The LSA is available at *www.govinfo.gov*. For changes to this volume of the CFR prior to 2001, see the “List of CFR Sections Affected, 1949–1963, 1964–1972, 1973–1985, and 1986–2000” published in 11 separate volumes. The “List of CFR Sections Affected 1986–2000” is available at *www.govinfo.gov*.

2019	
40 CFR	84 FR Page
Chapter I	
82 Determination	64765
82.42 (a)(1)(iii)(A) revised	34070
82.42 (a)(1)(iii)(F) revised	44230

2020	
40 CFR	85 FR Page
Chapter I	
82 Determination	79863
82.3 Amended	15291
82.4 (f) removed; (j) revised; (r) and (s) added	15291
82.9 (a), (b), (e) and (f) removed; (c) introductory text revised	15292
82.10 Removed	15292
82.12 (a)(1) introductory text revised; (a)(2), (b), and (c) removed	15292

40 CFR—Continued	85 FR Page
Chapter I—Continued	
82.13 (a), (c), (f)(2)(xvii) through (xxii), (3)(xiii) through (xvii), (g)(1)(xi), (xv), (xvii) through (xxi), (2)(i), (ii), (iii), (vi), (viii) through (xiii), (3)(i)(A), (vii), (4)(xv) through (xviii), (h) heading, (1) introductory text, (ii), (iii), (2) introductory text, (ii) through (v), (viii), (v), (w)(2), (y), (z), and (aa) revised; (f) heading, (2) heading, (g) heading, (2)(xv), (3) heading, (4) heading, (5) through (10), and (w) heading added; (f)(2)(iv), (v), (xvi), (3)(iv), (ix), (g)(2)(xiv), (4)(vii), (xi), and (i) removed; (f)(2)(xiv), (xv), (3) introductory text, and (g)(1) introductory text amended	15292
82.14 Added	15296
82.15 (g)(5) and (5) redesignated as (g)(6) and (7); (g)(3), new (5), and (8) added	15296
82.16 (a) heading removed; (a)(1) and (e) revised	15296
82.23 (a)(i)(F) removed; (b)(1)(i) and (ii) added	15298

40 CFR (7–1–24 Edition)

40 CFR—Continued

85 FR
Page

Chapter I—Continued

82.24 (a)(1), (b)(2)(iv), (c)(3)(i), (ii), (iii), (vi), (viii) through (xiii), (4)(i)(A), (vii), (d)(1) introductory text, and (iii) revised; (b)(1)(iv), (ix), (xi), (xii), (2)(xiv), (c)(1)(vi), (x), (xi), (2)(xvi), (d)(2), and (g) removed; (b)(1)(viii), (x), (2)(xi), (xiii), and (xiv) amended; (c)(6) through (11) added.....	15298
82.1—82.24 (Subpart A) Appendix K	15299
82.62 Amended	15300
82.64 (h) added.....	15300
82.66 (d)(2)(vi) and (e) revised; (f) added.....	15300
82.104 (c) and (h) revised	15300
82.106 (a) revised	15300
82.154 (a)(2)(i) revised.....	14171
82.157 (a) revised	14171
82.270 (e) revised	15301
83 Added	84154

2021

40 CFR

86 FR
Page

Chapter I

82.8 (b) revised	46995
82.31 Added	15595
82.32 (e)(1) revised	15595
82.36 (a)(7) revised; (a)(8) through (10) added.....	15595
82.38 (a) revised.....	15595
82.40 (a)(2)(i) revised	15595
82.30—82.42 (Subpart B) Appendix F amended.....	15596
82.170—82.184 (Subpart G) Appendix O amended.....	24471
82.170—82.184 (Subpart G) Appendix W added.....	24472
83 Removed; interim.....	26419
84 Added	55201
84.1 Added	55206
84.3 Amended.....	55206
84.5 Added	55206
84.13 (h) amended	55208
84.17 Added	55208
84.19 Added	55208
84.21 Added	55208
84.23 Added	55208
84.25 Added	55208
84.27 Added	55208
84.29 Added	55208
84.31 (a) through (g), (h)(1), (4) through (7), and (i) through (k) added.....	55215

40 CFR—Continued

86 FR
Page

Chapter I—Continued

84.33 Added	55221
84.35 Added	55221
84 Appendix A added	55222

2022

40 CFR

87 FR
Page

Chapter I

82 Determination.....	3037
82.170—82.184 (Subpart G) Appendix B amended.....	26292

2023

40 CFR

88 FR
Page

Chapter I

82 Determination	61977
82.170—82.184 (Subpart G) Appendix R amended	26418
82.170—82.184 (Subpart G) Appendix X added	26424
83 Removed	44721
84.3 Amended.....	46893
84.3 Amended; eff. 10-1-24.....	46894
84.5 (b)(1) introductory text, (iii), and (iv) amended; (b)(2) through (6) redesignated as (b)(3) through (7); (b)(1)(i), new (3), (d), and (i) revised; (b)(1)(v) and new (2) added	46894
84.7 (b)(1) amended; (b)(3) table revised	44225
84.7 (b)(2) amended; (b)(3) table revised	46895
84.9 (a) introductory text amended; (b) redesignated as (c); new (b) added	46895
84.11 (a) introductory text amended; (c) removed; (b) redesignated as new (c); new (b) added.....	46896
84.17 (a)(8) and (9) revised; (a)(10) and (11) added.....	46896
84.19 (a)(5) added	46896
84.25 (a)(1)(v) revised.....	46896
84.31 (b)(2)(i) through (iii), (c)(7), (i)(4)(i), and (j)(3) revised; (b)(3)(xi), (c)(1) introductory text, (2)(xviii), and (3)(i)(D) amended; (d)(2) and (k) redesignated as (d)(3) and (l); (c)(9), new (d)(2), and new (k) added.....	46896
84.37 Added	46898

List of CFR Sections Affected

40 CFR—Continued

88 FR
Page

Chapter I—Continued	
84.37 (a)(2), (3) and (c) added; eff. 10-1-24	46898
84.50—84.64 (Subpart B) Added.....	73205
84.54 (c)(1) revised; interim	88832

2024

(Regulations published from January 1,
2024, through July 1, 2024)

40 CFR

89 FR
Page

Chapter I	
82.170—82.184 (Subpart G) Appen- dix R amended; eff. 7-15-24	50463
82.170—82.184 (Subpart G) Appen- dix V amended; eff. 7-15-24	50474
82.170—82.184 (Subpart G) Appen- dix Y added; eff. 7-15-24	50479
82.154 (a)(1)(viii) revised; eff. 7-15- 24	50463

