



# FEDERAL REGISTER

---

Vol. 80                      Monday,  
No. 133                     July 13, 2015

Book 1 of 3 Books  
Pages 39941–40136

OFFICE OF THE FEDERAL REGISTER



The **FEDERAL REGISTER** (ISSN 0097-6326) is published daily, Monday through Friday, except official holidays, by the Office of the Federal Register, National Archives and Records Administration, Washington, DC 20408, under the Federal Register Act (44 U.S.C. Ch. 15) and the regulations of the Administrative Committee of the Federal Register (1 CFR Ch. I). The Superintendent of Documents, U.S. Government Publishing Office, Washington, DC 20402 is the exclusive distributor of the official edition. Periodicals postage is paid at Washington, DC.

The **FEDERAL REGISTER** provides a uniform system for making available to the public regulations and legal notices issued by Federal agencies. These include Presidential proclamations and Executive Orders, Federal agency documents having general applicability and legal effect, documents required to be published by act of Congress, and other Federal agency documents of public interest.

Documents are on file for public inspection in the Office of the Federal Register the day before they are published, unless the issuing agency requests earlier filing. For a list of documents currently on file for public inspection, see [www.ofr.gov](http://www.ofr.gov).

The seal of the National Archives and Records Administration authenticates the **Federal Register** as the official serial publication established under the Federal Register Act. Under 44 U.S.C. 1507, the contents of the **Federal Register** shall be judicially noticed.

The **Federal Register** is published in paper and on 24x microfiche. It is also available online at no charge at [www.fdsys.gov](http://www.fdsys.gov), a service of the U.S. Government Publishing Office.

The online edition of the **Federal Register** is issued under the authority of the Administrative Committee of the Federal Register as the official legal equivalent of the paper and microfiche editions (44 U.S.C. 4101 and 1 CFR 5.10). It is updated by 6:00 a.m. each day the **Federal Register** is published and includes both text and graphics from Volume 59, 1 (January 2, 1994) forward. For more information, contact the GPO Customer Contact Center, U.S. Government Publishing Office. Phone 202-512-1800 or 866-512-1800 (toll free). E-mail, [gpocusthelp.com](mailto:gpocusthelp.com).

The annual subscription price for the **Federal Register** paper edition is \$749 plus postage, or \$808, plus postage, for a combined **Federal Register**, **Federal Register** Index and List of CFR Sections Affected (LSA) subscription; the microfiche edition of the **Federal Register** including the **Federal Register** Index and LSA is \$165, plus postage. Six month subscriptions are available for one-half the annual rate. The prevailing postal rates will be applied to orders according to the delivery method requested. The price of a single copy of the daily **Federal Register**, including postage, is based on the number of pages: \$11 for an issue containing less than 200 pages; \$22 for an issue containing 200 to 400 pages; and \$33 for an issue containing more than 400 pages. Single issues of the microfiche edition may be purchased for \$3 per copy, including postage. Remit check or money order, made payable to the Superintendent of Documents, or charge to your GPO Deposit Account, VISA, MasterCard, American Express, or Discover. Mail to: U.S. Government Publishing Office—New Orders, P.O. Box 979050, St. Louis, MO 63197-9000; or call toll free 1-866-512-1800, DC area 202-512-1800; or go to the U.S. Government Online Bookstore site, see [bookstore.gpo.gov](http://bookstore.gpo.gov).

There are no restrictions on the republication of material appearing in the **Federal Register**.

**How To Cite This Publication:** Use the volume number and the page number. Example: 80 FR 12345.

**Postmaster:** Send address changes to the Superintendent of Documents, Federal Register, U.S. Government Publishing Office, Washington, DC 20402, along with the entire mailing label from the last issue received.

## SUBSCRIPTIONS AND COPIES

### PUBLIC

#### Subscriptions:

Paper or fiche 202-512-1800  
Assistance with public subscriptions 202-512-1806

General online information 202-512-1530; 1-888-293-6498

#### Single copies/back copies:

Paper or fiche 202-512-1800  
Assistance with public single copies 1-866-512-1800  
(Toll-Free)

### FEDERAL AGENCIES

#### Subscriptions:

Assistance with Federal agency subscriptions:

Email [FRSubscriptions@nara.gov](mailto:FRSubscriptions@nara.gov)  
Phone 202-741-6000



# Contents

**Federal Register**

Vol. 80, No. 133

Monday, July 13, 2015

## Agency for International Development

### NOTICES

Meetings:

Advisory Committee on Voluntary Foreign Aid, 39992

## Agency for Toxic Substances and Disease Registry

### NOTICES

Agency Information Collection Activities; Proposals, Submissions, and Approvals, 40065–40067

## Agriculture Department

### NOTICES

Agency Information Collection Activities; Proposals, Submissions, and Approvals, 39992

## Census Bureau

### NOTICES

Meetings:

2020 Census Tribal Consultation, 39993–39994

## Centers for Disease Control and Prevention

### NOTICES

Agency Information Collection Activities; Proposals, Submissions, and Approvals, 40067–40069

## Centers for Medicare & Medicaid Services

### NOTICES

Agency Information Collection Activities; Proposals, Submissions, and Approvals, 40069

## Children and Families Administration

### NOTICES

Agency Information Collection Activities; Proposals, Submissions, and Approvals, 40069–40070

## Civil Rights Commission

### NOTICES

Meetings; Sunshine Act, 39992–39993

## Coast Guard

### RULES

Safety Zones:

Annual Events in the Captain of the Port Detroit Zone, 39960–39961

Captain of the Port Lake Michigan Zone-Sturgeon Bay Yacht Club Evening on the Bay Fireworks, 39961

Misery Challenge, Manchester Bay, Manchester, MA, 39957–39959

### NOTICES

Meetings:

Great Lakes Pilotage Advisory Committee, 40075–40076

Port Access Route Study:

Chukchi Sea, Bering Strait and Bering Sea, 40074–40075

## Commerce Department

See Census Bureau

See Economic Development Administration

See Industry and Security Bureau

See International Trade Administration

See National Oceanic and Atmospheric Administration

See Patent and Trademark Office

## Defense Department

### NOTICES

Privacy Act; Systems of Records, 40037–40039

## Economic Development Administration

### NOTICES

Trade Adjustment Assistance; Petitions, 39994

## Education Department

### NOTICES

Agency Information Collection Activities; Proposals, Submissions, and Approvals:

Professional Development Grants for Indian Children

Application Package, 40039–40040

Applications for New Awards:

Improved Reentry Education, 40040–40048

## Energy Department

See Federal Energy Regulatory Commission

### NOTICES

Applications to Export Electric Energy:

H.Q. Energy Services (U.S.), Inc., 40049

Filings:

Self-Certification of Coal Capability under the Powerplant and Industrial Fuel Use Act, 40048

Fiscal Year 2014 Service Contract Inventory, 40048–40049

## Environmental Protection Agency

### RULES

Air Quality State Implementation Plans; Approvals and Promulgations:

California; South Coast Air Quality Management District; Revisions, 39966–39968

Findings of Failure to Submit State Implementation Plans for Interstate Transport for the 2008 National Ambient Air Quality Standards for Ozone, 39961–39966

Maryland; Preconstruction Requirements—Nonattainment New Source Review, 39968–39970

Tennessee; Redesignation of the Knoxville 2008 8-Hour Ozone Nonattainment Area to Attainment, 39970–39973

### PROPOSED RULES

Greenhouse Gas Emissions and Fuel Efficiency Standards for Medium and Heavy-Duty Engines and Vehicles; Phase 2, 40138–40765

### NOTICES

Amendments to Terminate Uses in Certain Pesticide Registrations; Corrections, 40064–40065

## Federal Aviation Administration

### RULES

Airworthiness Directives:

Kaman Aerospace Corporation (Kaman) Helicopters, 39941–39943

The Boeing Company Airplanes, 39943–39950

### NOTICES

Meetings:

Draft Re-Evaluation of the O'Hare Modernization

Environmental Impact Statement; Public Workshops, 40119

Petition for Exemption; Summaries, 40119

**Federal Deposit Insurance Corporation****PROPOSED RULES**

Assessments, 40838–40894

**Federal Election Commission****NOTICES**

Meetings; Sunshine Act, 40065

**Federal Energy Regulatory Commission****NOTICES**

Applications:

Gulf LNG Liquefaction Co., LLC; Gulf LNG Energy, LLC;  
Gulf LNG Pipeline LLC, 40057–40058

Logan, UT, 40054–40055

Northbrook Lyons Falls, LLC, 40056

Tennessee Gas Pipeline Co., LLC, 40063–40064

Combined Filings, 40052–40053, 40055–40057, 40060

Complaints:

Illinois Industrial Energy Consumers v. Midcontinent  
Independent System Operator, Inc., 40051–40052

Environmental Assessments; Availability, etc.:

Millennium Pipeline Co., LLC; Valley Lateral Project,  
40058–40060

Texas Eastern Transmission, LP; South Texas Expansion  
Project, 40060–40062

Guidance:

Billing Procedures for Annual Charges for the Costs of  
Other Federal Agencies for Administering the  
Federal Power Act, 40050–40051

Initial Market-Based Rate Filings Including Requests for  
Blanket Section 204 Authorizations:

Golden West Power Partners, LLC, 40053–40054

License Transfer Applications:

Cellu Tissue Corp.; Dunn Paper, 40049–40050

Meetings:

Staff Attendances, 40062–40063

Petitions for Declaratory Orders:

Bloom Energy Corp., 40052

Requests under Blanket Authorization:

Southwest Gas Storage Co., 40064

**Federal Highway Administration****NOTICES**

Federal Agency Actions:

Tennessee; Proposed SR–126 (Memorial Boulevard)  
Improvement Project, 40119–40120

**Federal Motor Carrier Safety Administration****NOTICES**

Hours of Service of Drivers; Exemption Applications:

R and R Transportation Group, 40120–40122

Qualification of Drivers; Exemption Applications:

Epilepsy and Seizure Disorders, 40127–40129

Hearing, 40125–40127

Vision, 40122–40125

**Federal Railroad Administration****NOTICES**

Applications for Approval of Discontinuance or

Modification of a Railroad Signal System, 40130

Petitions for Waivers of Compliance, 40129–40130

**Federal Retirement Thrift Investment Board****PROPOSED RULES**

Criminal Restitution Orders, 39975–39977

Default Investment Fund, 39974–39975

**Food and Drug Administration****NOTICES**

Agency Information Collection Activities; Proposals,  
Submissions, and Approvals:

Demonstrating Substantial Equivalence for Tobacco

Products and Demonstrating the Substantial

Equivalence of a New Tobacco Product: Responses to

Frequently Asked Questions, 40071–40072

Meetings:

Science Board, 40070–40071

**Health and Human Services Department**

*See* Agency for Toxic Substances and Disease Registry

*See* Centers for Disease Control and Prevention

*See* Centers for Medicare & Medicaid Services

*See* Children and Families Administration

*See* Food and Drug Administration

*See* Indian Health Service

*See* National Institutes of Health

*See* Substance Abuse and Mental Health Services  
Administration

**NOTICES**

Guidance:

Office of the Assistant Secretary for Preparedness and  
Response Public Access Plan to Federally Funded  
Research—Publications and Data, 40072

**Homeland Security Department**

*See* Coast Guard

*See* U.S. Citizenship and Immigration Services

*See* U.S. Customs and Border Protection

**Indian Health Service****NOTICES**

Office of Direct Service and Contracting Tribes; National  
Indian Health Outreach and Education—Health Reform  
Cooperative Agreement; Correction, 40072–40073

**Industry and Security Bureau****RULES**

Export Administration Regulations:

Control of Spacecraft Systems and Related Items the  
President Determines No Longer Warrant Control  
under the United States Munitions List; Clarifications  
and Corrections, 39950–39957

**Interior Department**

*See* Land Management Bureau

*See* National Park Service

**PROPOSED RULES**

Land Exchange Procedures and Procedures to Amend the  
Hawaiian Homes Commission Act, 39991

**Internal Revenue Service****NOTICES**

Meetings:

Taxpayer Advocacy Panel Joint Committee, 40131–40132

Taxpayer Advocacy Panel Notices and Correspondence  
Project Committee, 40132

Taxpayer Advocacy Panel Special Projects Committee,  
40131

Taxpayer Advocacy Panel Tax Forms and Publications  
Project Committee, 40131

Taxpayer Advocacy Panel Taxpayer Assistance Center  
Improvements Project Committee, 40132

Taxpayer Advocacy Panel Toll-Free Phone Line Project  
Committee, 40132



**International Trade Administration****NOTICES**

Antidumping or Countervailing Duty Investigations, Orders, or Reviews:

Certain Steel Nails From the Republic of Korea, Malaysia, the Sultanate of Oman, Taiwan, and the Socialist Republic of Vietnam, 39994–39997

Multilayered Wood Flooring from the People's Republic of China, 39998–39999

Polyethylene Retail Carrier Bags from Indonesia, Malaysia, the People's Republic of China, Taiwan, Thailand, and the Socialist Republic of Vietnam, 39997–39998

**Land Management Bureau****PROPOSED RULES**

Onshore Oil and Gas Operations:

Federal and Indian Oil and Gas Leases; Site Security, 40768–40836

**NOTICES**

Agency Information Collection Activities; Proposals, Submissions, and Approvals, 40084

Realty Actions:

Segregation of Public Land Located in Lyon County and Mineral County, NV, 40084–40085

**Legal Services Corporation****NOTICES**

Meetings; Sunshine Act, 40085–40087

**National Highway Traffic Safety Administration****PROPOSED RULES**

Greenhouse Gas Emissions and Fuel Efficiency Standards for Medium and Heavy-Duty Engines and Vehicles; Phase 2, 40138–40765

**National Institutes of Health****NOTICES**

Meetings:

Center for Scientific Review, 40073

Eunice Kennedy Shriver National Institute of Child Health and Human Development, 40073

**National Oceanic and Atmospheric Administration****NOTICES**

Takes of Marine Mammals Incidental to Specified Activities:

Construction Activities at the Children's Pool Lifeguard Station at La Jolla, CA, 39999–40016

Marine Seismic Survey in the Beaufort Sea, AK, 40016–40037

**National Park Service****PROPOSED RULES**

Special Regulations:

Klondike Gold Rush National Historical Park, Horse Management, 39988–39990

Lake Chelan National Recreation Area, Solid Waste Disposal, 39985–39988

**National Science Foundation****NOTICES**

Meetings; Sunshine Act, 40087

**Nuclear Regulatory Commission****NOTICES**

Guidance:

Oversight of Counterfeit, Fraudulent, and Suspect Items in the Nuclear Industry, 40087–40088

Revision 1, Applications of Bioassay for Uranium, 40088–40090

Meetings; Sunshine Act, 40088

**Patent and Trademark Office****NOTICES**

Agency Information Collection Activities; Proposals, Submissions, and Approvals:

Post Patent Public Submissions, 40037

**Securities and Exchange Commission****NOTICES**

Self-Regulatory Organizations; Proposed Rule Changes:

BOX Options Exchange, LLC, 40100–40107

Chicago Board Options Exchange, Inc., 40090–40092, 40111–40113, 40116–40118

Depository Trust Co., 40116

Financial Industry Regulatory Authority, Inc., 40092–40098

NASDAQ OMX PHLX LLC, 40107–40111

NASDAQ Stock Market LLC, 40098–40100

NYSE Arca, Inc., 40113–40115

**State Department****NOTICES**

Meetings:

Overseas Security Advisory Council, 40118–40119

**Substance Abuse and Mental Health Services Administration****NOTICES**

Agency Information Collection Activities; Proposals, Submissions, and Approvals, 40073–40074

**Transportation Department**

*See* Federal Aviation Administration

*See* Federal Highway Administration

*See* Federal Motor Carrier Safety Administration

*See* Federal Railroad Administration

*See* National Highway Traffic Safety Administration

**Treasury Department**

*See* Internal Revenue Service

*See* United States Mint

**PROPOSED RULES**

Nondiscrimination on the Basis of Race, Color, or National Origin in Programs or Activities Receiving Federal Financial Assistance, 39977–39985

**NOTICES**

Agency Information Collection Activities; Proposals, Submissions, and Approvals, 40132–40133

**U.S. Citizenship and Immigration Services****NOTICES**

Agency Information Collection Activities; Proposals, Submissions, and Approvals:

Application to Preserve Residence for Naturalization; Revision, 40083

Request for Hearing on a Decision in Naturalization Proceedings, 40082–40083

**U.S. Customs and Border Protection****NOTICES**

National Customs Automation Program:

Location Filing Entry Procedures in the Automated Commercial Environment, etc., 40079–40082

**Western Hemisphere Travel Initiative:**

Approval of the Seneca Nation of Indians Tribal Card as Document to Prove Citizenship for Entry in the United States at Land and Sea Ports of Entry, 40076–40077

Designation of Minnesota Enhanced Driver's License and Identity Document as Travel Documents, 40077–40079

**United States Mint****NOTICES**

Pricing for the 2015 American Liberty High Relief Gold Coin, 40133

**Veterans Affairs Department****NOTICES**

Agency Information Collection Activities; Proposals, Submissions, and Approvals, 40135

Agency Information Collection Activities; Proposals, Submissions, and Approvals:

Description of Materials, 40135–40136

Notice of Lapse and Application for Reinstatement; Withdrawal, 40136

Preliminary Independent Living Assessment, 40136

Veterans Transportation Service Data Collection, 40133–40134

VHA Homeless Programs Project Community Homelessness Assessment, Local Education and Networking Groups for Veterans, 40134–40135

---

**Separate Parts In This Issue****Part II**

Environmental Protection Agency, 40138–40765  
Transportation Department, National Highway Traffic Safety Administration, 40138–40765

**Part III**

Interior Department, Land Management Bureau, 40768–40836

**Part IV**

Federal Deposit Insurance Corporation, 40838–40894

---

**Reader Aids**

Consult the Reader Aids section at the end of this issue for phone numbers, online resources, finding aids, and notice of recently enacted public laws.

To subscribe to the Federal Register Table of Contents LISTSERV electronic mailing list, go to <http://listserv.access.gpo.gov> and select Online mailing list archives, FEDREGTOC-L, Join or leave the list (or change settings); then follow the instructions.

---

**CFR PARTS AFFECTED IN THIS ISSUE**

---

A cumulative list of the parts affected this month can be found in the Reader Aids section at the end of this issue.

**5 CFR****Proposed Rules:**

1600.....	39974
1601.....	39974
1651.....	39974
1653.....	39975

**12 CFR****Proposed Rules:**

327.....	40838
----------	-------

**14 CFR**

39 (2 documents) .....	39941, 39443
------------------------	-----------------

**15 CFR**

736.....	39950
740.....	39950
744.....	39950
748.....	39950
774.....	39950

**31 CFR****Proposed Rules:**

22.....	39977
---------	-------

**33 CFR**

165 (3 documents) .....	39957, 39960, 39961
-------------------------	------------------------

**36 CFR****Proposed Rules:**

7.....	39985
13.....	39988

**40 CFR**

52 (4 documents) .....	39961, 39966, 39968, 39970
81.....	39970

**Proposed Rules:**

9.....	40138
22.....	40138
85.....	40138
86.....	40138
600.....	40138
1033.....	40138
1036.....	40138
1037.....	40138
1039.....	40138
1042.....	40138
1043.....	40138
1065.....	40138
1066.....	40138
1068.....	40138

**43 CFR****Proposed Rules:**

47.....	39991
48.....	39991
3160.....	40768
3170.....	40768

**49 CFR****Proposed Rules:**

512.....	40138
523.....	40138
534.....	40138
535.....	40138
537.....	40138
538.....	40138

# Rules and Regulations

Federal Register

Vol. 80, No. 133

Monday, July 13, 2015

This section of the FEDERAL REGISTER contains regulatory documents having general applicability and legal effect, most of which are keyed to and codified in the Code of Federal Regulations, which is published under 50 titles pursuant to 44 U.S.C. 1510.

The Code of Federal Regulations is sold by the Superintendent of Documents. Prices of new books are listed in the first FEDERAL REGISTER issue of each week.

## DEPARTMENT OF TRANSPORTATION

### Federal Aviation Administration

#### 14 CFR Part 39

[Docket No. FAA-2014-0758; Directorate Identifier 2013-SW-062-AD; Amendment 39-18202; AD 2015-14-04]

RIN 2120-AA64

#### Airworthiness Directives; Kaman Aerospace Corporation (Kaman) Helicopters

**AGENCY:** Federal Aviation Administration (FAA), DOT.

**ACTION:** Final rule.

**SUMMARY:** We are adopting a new airworthiness directive (AD) for Kaman Model K-1200 helicopters with certain main rotor blades (MRB) installed. This AD requires inspecting each MRB for a crack or damage. This AD was prompted by a report that a crack was found on an MRB during a tear-down inspection. The actions are intended to detect a crack in the MRB, which could lead to failure of the MRB and subsequent loss of control of the helicopter.

**DATES:** This AD is effective August 17, 2015.

**ADDRESSES:** For service information identified in this AD, contact Kaman Aerospace Corporation, Old Windsor Rd., P.O. Box 2, Bloomfield, Connecticut 06002-0002; telephone (860) 242-4461; fax (860) 243-7047; or at <http://www.kamanaero.com>. You may review a copy of the referenced service information at the FAA, Office of the Regional Counsel, Southwest Region, 2601 Meacham Blvd., Room 663, Fort Worth, Texas 76137.

#### Examining the AD Docket

You may examine the AD docket on the Internet at <http://www.regulations.gov> or in person at the Docket Operations Office between 9

a.m. and 5 p.m., Monday through Friday, except Federal holidays. The AD docket contains this AD, the economic evaluation, any comments received, and other information. The street address for the Docket Operations Office (phone: 800-647-5527) is U.S. Department of Transportation, Docket Operations Office, M-30, West Building Ground Floor, Room W12-140, 1200 New Jersey Avenue SE., Washington, DC 20590.

**FOR FURTHER INFORMATION CONTACT:** Nicholas Faust, Aviation Safety Engineer, Boston Aircraft Certification Office, Engine & Propeller Directorate, 12 New England Executive Park, Burlington, Massachusetts 01803; telephone (781) 238-7763; email [nicholas.faust@faa.gov](mailto:nicholas.faust@faa.gov).

#### SUPPLEMENTARY INFORMATION:

##### Discussion

On October 3, 2014, at 79 FR 59697, the **Federal Register** published our notice of proposed rulemaking (NPRM), which proposed to amend 14 CFR part 39 by adding an AD that would apply to Kaman Model K-1200 helicopters with certain part-numbered MRBs installed. The NPRM proposed to require performing repetitive X-Ray and visual inspections of each wooden MRB for a crack, wood split, void, or delamination at intervals not exceeding 1,000 hours time-in-service (TIS). If there is a crack, wood split, void, or delamination, the NPRM proposed to require repairing or replacing the MRB before further flight. The NPRM also proposed accomplishing the required inspections and repairs by a method approved by the Manager of the Boston Aircraft Certification Office.

The NPRM was prompted by reports of cracks found in the MRB spar during X-ray and teardown inspections with the MRB removed from the helicopter. The proposed requirements were intended to detect a crack in the MRB, which could lead to failure of the MRB and subsequent loss of control of the helicopter.

Since we issued the NPRM, we discovered a typographical error in paragraph (a) of this AD, where we incorrectly stated the design approval holder's name as Kaman Aerospace Incorporated instead of Kaman Aerospace Corporation, as specified by the current FAA type certificate. We have corrected this error.

#### Comments

After our NPRM (79 FR 59697, October 3, 2014), was published, we received comments from one commenter.

#### Request

Kaman suggested, without explanation, clarifying the description of the cost to replace an MRB set in the Cost of Compliance section by adding the word "non-repairable" before "MRB set."

We disagree. Operators may elect to replace a repairable MRB set instead of having the MRBs repaired. The ability to repair a MRB set does not change the cost of replacement.

Kaman also suggested, without explanation, changing the compliance time in paragraph (e)(1) of this AD to state, "When the MRB reaches 3,000 hours TIS and before it reaches 3,050 hours TIS . . ."

We disagree. This AD requires an initial inspection before 3,000 hours TIS but allows an additional 50 hours TIS for any MRBs that have already accumulated 3,000 hours TIS as of the effective date of this AD. The suggested language would change two requirements. First, it would allow the additional 50 hours TIS for all affected helicopters and is inconsistent with Kaman's service information. Second, it would prohibit blades to be inspected before they accumulate 3,000 hours.

#### FAA's Determination

We have reviewed the relevant information, considered the comments received, and determined that an unsafe condition exists and is likely to exist or develop on other products of these same type designs and that air safety and the public interest require adopting the AD requirements as proposed with minor editorial change described previously. This change is consistent with the intent of the proposals in the NPRM (79 FR 59697, October 3, 2014) and will not increase the economic burden on any operator nor increase the scope of the AD.

#### Related Service Information

We reviewed Kaman Maintenance Manual 04-00-00, Continued Airworthiness, Revision 31, dated August 1, 2013, which establishes the airworthiness limitations for the Model K-1200 helicopter. The airworthiness

limitations establish an MRB life limit of 8,000 hours TIS and also establish a recurring 1,000 hour Rotor Blade Spar Inspection for each MRB with 3,000 or more hours TIS.

We also reviewed Kaman Maintenance Manual 05–20–06, 1,000 Hour Rotor Blade Spar Inspection, Revision 31, dated August 1, 2013, which specifies returning each MRB to Kaman every 1,000 hours for inspection after the MRB accumulates 3,000 hours TIS.

### Costs of Compliance

We estimate that this AD will affect 11 helicopters of U.S. Registry. We estimate that operators may incur the following costs in order to comply with this AD. At an average labor cost of \$85 per work-hour, inspecting each matched pair of main rotor blades requires about 160 work-hours and required parts cost about \$2,000, for a cost per MRB set of \$15,600 and a cost per helicopter of \$31,200 per inspection cycle. If required, repairing a cracked MRB requires about 335 work-hours and required parts cost about \$15,000, for a cost per MRB of \$43,475. Replacing an MRB set requires about 4 work-hours, and required parts cost about \$495,000, for a cost per helicopter of \$495,340.

### Authority for This Rulemaking

Title 49 of the United States Code specifies the FAA's authority to issue rules on aviation safety. Subtitle I, section 106, describes the authority of the FAA Administrator. Subtitle VII: Aviation Programs, describes in more detail the scope of the Agency's authority.

We are issuing this rulemaking under the authority described in Subtitle VII, Part A, Subpart III, Section 44701: "General requirements." Under that section, Congress charges the FAA with promoting safe flight of civil aircraft in air commerce by prescribing regulations for practices, methods, and procedures the Administrator finds necessary for safety in air commerce. This regulation is within the scope of that authority because it addresses an unsafe condition that is likely to exist or develop on products identified in this rulemaking action.

### Regulatory Findings

This AD will not have federalism implications under Executive Order 13132. This AD will not have a substantial direct effect on the States, on the relationship between the national government and the States, or on the distribution of power and responsibilities among the various levels of government.

For the reasons discussed above, I certify that this AD:

- (1) Is not a "significant regulatory action" under Executive Order 12866;
- (2) Is not a "significant rule" under DOT Regulatory Policies and Procedures (44 FR 11034, February 26, 1979);
- (3) Will not affect intrastate aviation in Alaska to the extent that it justifies making a regulatory distinction; and
- (4) Will not have a significant economic impact, positive or negative, on a substantial number of small entities under the criteria of the Regulatory Flexibility Act.

We prepared an economic evaluation of the estimated costs to comply with this AD and placed it in the AD docket.

### List of Subjects in 14 CFR Part 39

Air transportation, Aircraft, Aviation safety, Incorporation by reference, Safety.

### Adoption of the Amendment

Accordingly, under the authority delegated to me by the Administrator, the FAA amends 14 CFR part 39 as follows:

### PART 39—AIRWORTHINESS DIRECTIVES

- 1. The authority citation for part 39 continues to read as follows:

**Authority:** 49 U.S.C. 106(g), 40113, 44701.

#### § 39.13 [Amended]

- 2. The FAA amends § 39.13 by adding the following new airworthiness directive (AD):

#### 2015–14–04 Kaman Aerospace

**Corporation:** Amendment 39–18202; Docket No. FAA–2014–0758; Directorate Identifier 2013–SW–062–AD.

#### (a) Applicability

This AD applies to Kaman Aerospace Corporation (Kaman) Model K–1200 helicopters with a main rotor blade (MRB) part number K911001–009, K911001–010, K911001–109, or K911001–110 installed, certificated in any category.

#### (b) Unsafe Condition

This AD defines the unsafe condition as a crack in an MRB, which could lead to failure of the MRB and subsequent loss of control of the helicopter.

#### (c) Effective Date

This AD becomes effective August 17, 2015.

#### (d) Compliance

You are responsible for performing each action required by this AD within the specified compliance time unless it has already been accomplished prior to that time.

#### (e) Required Actions

- (1) Before the MRB reaches 3,000 hours time-in-service (TIS) or within 50 hours TIS,

whichever occurs later, and thereafter at intervals not exceeding 1,000 hours TIS:

(i) X-Ray inspect each MRB between station (STA) 30 and STA 78 for a crack, a wood split, a void, and delamination.

(ii) Using a 10X or higher power magnifying glass, inspect each spar plank between STA 33 and STA 78 for a wood split or a crack, and inspect each spar plank to plank glue-line for a void or delamination.

(2) If there is a crack, wood split, void, or delamination within maximum repair damage limits in an MRB, before further flight, repair the MRB. If there is a crack, wood split, void, or delamination exceeding maximum repair damage limits in an MRB, before further flight, replace the MRB with an airworthy MRB.

(3) Each inspection and repair procedure required for compliance with Paragraphs (e)(1) and (e)(2) of this AD must be accomplished by a method approved by the Manager, Boston Aircraft Certification Office (ACO). For a repair method to be approved by the Manager, Boston ACO, as required by this AD, the Manager's approval letter must specifically refer to this AD.

### (f) Alternative Methods of Compliance (AMOCs)

(1) The Manager, Boston Aircraft Certification Office, FAA, may approve AMOCs for this AD. Send your proposal to: Nicholas Faust, Aviation Safety Engineer, Boston Aircraft Certification Office, Engine & Propeller Directorate, 12 New England Executive Park, Burlington, Massachusetts 01803; telephone (781) 238–7763; email [nicholas.faust@faa.gov](mailto:nicholas.faust@faa.gov).

(2) For operations conducted under a 14 CFR part 119 operating certificate or under 14 CFR part 91, subpart K, we suggest that you notify your principal inspector, or lacking a principal inspector, the manager of the local flight standards district office or certificate holding district office before operating any aircraft complying with this AD through an AMOC.

### (g) Additional Information

Kaman Aerospace Corporation Maintenance Manual 04–00–00, Continued Airworthiness, Revision 31, dated August 1, 2013, and Kaman Aerospace Corporation Maintenance Manual 05–20–06, 1,000 Hour Rotor Blade Spar Inspection, Revision 31, dated August 1, 2013, which are not incorporated by reference, contain additional information about the subject of this AD. For service information identified in this AD, contact Kaman Aerospace Corporation, Old Windsor Rd., P.O. Box 2, Bloomfield, Connecticut 06002–0002; telephone (860) 242–4461; fax (860) 243–7047; or at <http://www.kamanaero.com>. You may review a copy of this service information at the FAA, Office of the Regional Counsel, Southwest Region, 2601 Meacham Blvd., Room 663, Fort Worth, Texas 76137.

### (h) Subject

Joint Aircraft Service Component (JASC) Code: 6210, Main Rotor MRB.

Issued in Fort Worth, Texas, on June 29, 2015.

**Lance T. Gant,**

*Acting Directorate Manager, Rotorcraft Directorate, Aircraft Certification Service.*

[FR Doc. 2015-16939 Filed 7-10-15; 8:45 am]

BILLING CODE 4910-13-P

## DEPARTMENT OF TRANSPORTATION

### Federal Aviation Administration

#### 14 CFR Part 39

[Docket No. FAA-2014-0780; Directorate Identifier 2014-NM-168-AD; Amendment 39-18207; AD 2015-14-09]

RIN 2120-AA64

#### Airworthiness Directives; The Boeing Company Airplanes

**AGENCY:** Federal Aviation Administration (FAA), DOT.

**ACTION:** Final rule.

**SUMMARY:** We are adopting a new airworthiness directive (AD) for The Boeing Company Model 747 airplanes equipped with a main deck side cargo door (MDSCD). This AD was prompted by recent testing that indicates that intermodal containers, when loaded as cargo, under certain flight-load conditions, can shift and impact the adjacent fuselage frames. This AD requires revising the airplane flight manual (AFM) to incorporate limitations for carrying certain payloads. We are issuing this AD to prevent intermodal containers loaded in the offset method from shifting during flight gust loads and damaging fuselage frames, which could lead to the structural failure of the aft fuselage in flight and subsequent in-flight breakup of the airplane.

**DATES:** This AD is effective August 17, 2015.

#### Examining the AD Docket

You may examine the AD docket on the Internet at <http://www.regulations.gov> by searching for and locating Docket No. FAA-2014-0780; or in person at the Docket Management Facility between 9 a.m. and 5 p.m., Monday through Friday, except Federal holidays. The AD docket contains this AD, the regulatory evaluation, any comments received, and other information. The address for the Docket Office (phone: 800-647-5527) is Docket Management Facility, U.S. Department of Transportation, Docket Operations, M-30, West Building Ground Floor, Room W12-140, 1200 New Jersey Avenue SE., Washington, DC 20590.

#### FOR FURTHER INFORMATION CONTACT:

Steven C. Fox, Senior Aerospace Engineer, Airframe Branch, ANM-120S, FAA, Seattle Aircraft Certification Office (ACO), 1601 Lind Avenue SW., Renton, WA 98057-3356; phone: 425-917-6425; fax: 425-917-6590; email: [steven.fox@faa.gov](mailto:steven.fox@faa.gov).

#### SUPPLEMENTARY INFORMATION:

##### Discussion

The FAA issued a notice of proposed rulemaking (NPRM) to amend 14 CFR part 39 by adding an AD that would apply to The Boeing Company Model 747 airplanes equipped with an MDSCD. The NPRM published in the **Federal Register** on December 1, 2014 (79 FR 71037). The NPRM was prompted by recent testing, which indicates that intermodal containers, when loaded as cargo, under certain flight-load conditions, can shift and impact the adjacent fuselage frames. The NPRM proposed to require revising the AFM to incorporate limitations for carrying certain payloads. We are issuing this AD to prevent intermodal containers loaded in the offset method from shifting during flight gust loads and damaging fuselage frames, which could lead to the structural failure of the aft fuselage in flight and subsequent in-flight breakup of the airplane.

##### Background

Intermodal containers are common in the cargo shipping industry and transported by ships, trains, and trucks. The focus of this final rule is an intermodal container that is nominally 20 feet long, 8 feet wide, and 8.5 feet tall. This nominally sized intermodal container includes the dimensions of an International Organization for Standardization (ISO) container ISO 668-1CC. Because the intermodal containers themselves do not meet the requirements of FAA Technical Standard Order TSO-C90D, "Cargo Pallets, Nets and Containers (Unit Load Devices)," the lower surface on these intermodal containers is incompatible with most airplane cargo-loading systems (CLSs). These intermodal containers, however, can be concentrically loaded on an FAA-approved TSO-C90D pallet with a certified net combination and loaded in the center of the airplane, restrained by the CLS or a series of straps connected to the aircraft structure in accordance with the airplane's FAA-approved Weight and Balance Manual (WBM) procedures for cargo that is not a Unit Load Device (ULD).

The WBM is part of the Operating Limitations section of the Airplane Flight Manual (AFM). In accordance

with 14 CFR 21.41, the Operating Limitations are part of the airplane type certificate and, therefore, can be modified only by changing that certificate; that is, by obtaining an amended or supplemental type certificate. Revisions to the AFM are approved as AFM supplements, and the approval is based on a finding that, with the AFM revisions, the airplane continues to meet the applicable airworthiness standards. Operators are required to comply with the Operating Limitations by 14 CFR 91.9(a).

The FAA has become aware that some operators, both domestic and foreign, are not loading these containers in the center of the airplane, but rather in the standard left and right pallet positions. When loaded in this manner, the 8-foot, 6-inch, height of the intermodal container interferes with the fuselage, so some operators have been transporting these intermodal containers shifted inboard, off of the FAA-approved TSO pallets, and attached to the pallet only with a net and/or straps. This method of transport is referred to as the "offset method." The practice of offsetting the intermodal containers results in the certified pallet-net combination having slack in the net by the amount of the offset. FAA observations have found the offset for intermodal containers is as much as 9 inches, with the corresponding 9 inches of slack in the TSO pallet net.

Although additional cargo straps have been used to restrain the intermodal containers to the pallets, the FAA determined that these straps are not effective, and the intermodal container can shift in flight. In 2013, a U.S. cargo operator requested permission from the FAA to carry intermodal containers on Boeing Model 747 airplanes using the offset method—similar to procedures used by other U.S. and non-U.S. air carriers. Based on the FAA's review of the offset method, it denied the operator's request.

#### Industry Testing of the Offset Method

In March 2014, some U.S. cargo operators and Boeing conducted a series of full-scale tests, witnessed by the FAA, to demonstrate that carrying intermodal containers by the offset method could be shown safe and compliant to the applicable regulations. The test procedures were developed by engineers from Boeing and some U.S. cargo operators, and were intended to show compliance for flight loads on Model 747 airplanes only. The results produced CLS failures and excessive deflections. The preliminary test results confirmed the FAA's safety concerns.

U.S. operators and Boeing conducted additional testing to demonstrate that carrying intermodal containers by the offset method could be shown to be safe and compliant with applicable regulations. This testing used methods from National Aerospace Standard (NAS) 3610, with maximum payloads that were reduced from those tested previously. The intent was for Boeing to use the test data to develop an appropriate loading method that could be incorporated into the Boeing Model 747 WBMs. The certified pallet net was not used because previous testing showed it ineffective in restraining the ISO container as the offset of the container on the pallet introduces slack in the net, with the container essentially free to move laterally in the airplane by the amount of the offset.

Significant engineering resources were applied, and a complex method of strapping installation and procedures and sequence for tightening the straps was developed to preclude the excessive deflections experienced during earlier tests. While a few load cases were successful, some had very small margins (precluding any reduction of the complexity of the nearly 100 straps required). The testing was halted after attempts to substantiate vertical loading repetitively overloaded the forward and aft CLS restraint locks, and the proposed cargo restraining method was deemed unviable.

FAA engineering from the Transport Airplane Directorate has been extensively involved in the testing of offset loading methods for intermodal containers with the objective to determine and document a safe and compliant methodology that could be the basis for a Boeing Model 747 Weight and Balance Supplement for airline use worldwide. Testing to date indicates this objective has not been met.

When positioned in accordance with the WBMs, an intermodal container is secured to the CLS pallet along its entire length by straps and netting. Offsetting the container has the effect of creating slack in the net and straps, except at the ends of the container. As a result, when gust loads are encountered, most of the loads are transferred to the locks at the ends of the container and are not shared with the locks in the middle. This uneven loading has the effect of exceeding the structural capability of the locks at the ends of the container. This phenomenon quickly failed the forward and aft CLS locks during vertical testing, as confirmed by both sets of industry testing.

At this time, there is no offset method for restraining intermodal containers

that has been demonstrated to be safe and compliant.

#### Safety Issue

The current practice of carrying an intermodal container by the offset method is not currently permitted by the Boeing Model 747 WBMs. A series of tests has verified that an intermodal container, under certain flight-load conditions, can shift in both the outboard and vertical directions. This shift by the intermodal container can damage as many as ten fuselage frames per container position during flight, leading to the structural failure of the aft fuselage in flight, and subsequent in-flight breakup of the airplane.

Normally, the FAA does not issue ADs to address non-compliance with existing regulations. But because of the widespread nature of these practices, the FAA has determined that issuing an AD is the most effective means of addressing this unsafe condition.

This final rule, therefore, revises the Operating Limitations section of the FAA-approved AFM to incorporate limitations on carrying certain payloads. As revised, the AFM expressly states the pre-existing prohibition on carriage of either (1) intermodal containers nominally sized at 20 feet long, 8 feet wide, and 8.5 feet tall, or (2) ISO 668–1CC containers, if those containers are not concentrically loaded on a pallet and restrained to the aircraft in accordance with the FAA-approved WBMs or WBM supplement.

#### Explanation of Changes to the Final Rule

Since issuing the NPRM (79 FR 71037, December 1, 2014), the FAA has learned that some operators might regard changes that they make to the Boeing Weight and Balance Manual to be “FAA approved,” even though the operators have not sought FAA approval through the supplemental type certificate process, as described in the NPRM. To clarify that only changes made through the type certificate process are considered “FAA approved,” we have revised the language of the final rule to specifically reference the FAA-approved Boeing type certificate Weight and Balance Manual or a Supplemental Weight and Balance Manual approved through the supplemental type certificate process. Given the comments opposing the proposed AD discussed below, it is apparent that the commenters were not confused on this point. Nevertheless, this clarification will prevent confusion for any operator in the future.

#### Comments

We gave the public the opportunity to participate in developing this AD. The following presents the comments received on the NPRM (79 FR 71037, December 1, 2014) and the FAA’s response to each comment.

#### Support for the NPRM (79 FR 71037, December 1, 2014)

The Air Line Pilots Association, International (ALPA), stated that they fully support the intent of the NPRM (79 FR 71037, December 1, 2014).

#### Request To Withdraw NPRM (79 FR 71037, December 1, 2014): Intermodal Containers Are Permitted by WBMs

The Cargo Airline Association, Atlas Air, International Air Transport Association (IATA), National Air Carrier Association (NACA), Kalitta Air, LLC (Kalitta), and the Michigan Senate requested that we withdraw the NPRM (79 FR 71037, December 1, 2014). The commenters asserted that offset intermodal containers are permitted by the Boeing Model 747 WBMs. The commenters also asserted that the Boeing Model 747 WBMs permit the restraint of an intermodal container and pallet assembly with cargo restraint straps only to the pallet (and not the airplane itself), whether or not the container is offset. The commenters concluded that the NPRM statement indicating that “the current practice of carrying an intermodal container by the offset method is not permitted by the Boeing Model 747 Weight and Balance Manual” is incorrect and completely at odds with Boeing’s WBMs. The commenters limited their views to only those Model 747 WBMs created by Boeing.

We disagree with the request. Since the commenters did not address any supplemental WBMs produced by holders of supplemental type certificates (STCs), our response is limited to a discussion of the Boeing Model 747 WBMs. As explained below, contrary to the commenters’ assertions, the Boeing Model 747 WBMs do not permit loading of either offset intermodal containers or intermodal containers strapped only to the pallet.

As discussed in the NPRM, in accordance with section 21.41 of the Federal Aviation Regulations (14 CFR 21.41), the operating limitations are part of the airplane’s type certificate (TC). The operating limitations specified in the Boeing Model 747 WBMs are established by the TC holder at the time of type certification as necessary to demonstrate that the airplane, when properly loaded, will comply with all

applicable airworthiness requirements. One of these requirements is to demonstrate the capability of the airplane to continue safe operation when subjected to a range of structural loads that may be encountered during operations (14 CFR 25.1519). The Boeing Model 747 WBMs provide operators with detailed instructions, including restrictions, on how the airplane may be loaded such that after loading and during flight the airplane still is in compliance with the operating limitations.

The Boeing Model 747 cargo airplanes are equipped with a cargo loading system, which is part of the airplane's type design and consists of roller trays, guides, latches, and locks that restrain the cargo to the airplane for flight loads. A Unit Load Device (ULD) is a device for grouping and retaining cargo for transit. The Boeing Model 747 WBMs include, as part of the operating limitations, instructions that identify which ULDs may be loaded into the airplane's cargo loading system on the main cargo deck of the airplane without additional restraint to the airplane's structure.

Although the actual wording in these manuals varies slightly, all Boeing Model 747 WBMs require that, to be carried on the main deck without additional restraints, "certified" ULDs must conform to FAA Technical Standard Order (TSO) TSO-C90, "Cargo Pallets, Nets, and Containers," or to National Aerospace Standard (NAS) 3610 ("Cargo Unit Load Devices—Specification For"), the document the TSO references as a requirement. NAS 3610 is an industry standard used to define the required configuration and certification testing for various ULDs.

The types of certified ULDs identified in the Boeing Model 747 WBMs are NAS 3610-compliant containers) and pallet-net combinations. Containers identified in NAS 3610 are attached directly to the airplane's cargo loading system. Intermodal containers, which are the subject of this AD, do not meet the standard for NAS 3610 containers. For the pallet-net combinations, the cargo is restrained to the pallet by a net that attaches to the pallet on all four sides and covers the cargo. Under the Boeing Model 747 WBMs, an intermodal container may be loaded into a certified pallet-net combination ULD as long as the intermodal container is located within the perimeter of the pallet. However, as explained in the NRPM, an intermodal container offset from its pallet introduces slack in the corresponding net and, therefore, does not meet the requirements of NAS 3610

and is not allowed as a certified ULD under the Boeing Model 747 WBMs.

The Boeing Model 747 WBMs require that all cargo other than the identified ULDs be restrained to the airplane by straps in accordance with instructions specified in the WBMs. The Boeing Model 747 WBMs provide detailed instructions that define the specific locations where straps must be attached to the airplane structure, as well as other information such as maximum weights to be restrained at each location. With one recently approved exception,<sup>1</sup> nothing in the Boeing Model 747 WBMs or in NAS 3610 allows for the use of straps to restrain cargo to the ULD pallet itself.

Therefore, contrary to the commenters' assertions, the Boeing Model 747 WBMs do not permit loading of either offset intermodal containers or intermodal containers strapped only to the pallet. Furthermore, neither Boeing nor any of the commenters have shown that the airplane, when loaded with offset containers, complies with the applicable airworthiness standards of part 25. As discussed in the NPRM, any such showing would have to be done by a change to the type certificate in accordance with FAA Order 8110.4C.

We have not changed this final rule regarding this issue.

#### **Opposition to NPRM (79 FR 71037, December 1, 2014): History of Safety**

IATA, Kalitta, and the Michigan Senate opposed the NPRM (79 FR 71037, December 1, 2014), stating that it does not refer to any incident or accident. The commenters reported that for more than 40 years, intermodal containers loaded as offset cargo have been carried with no damage to frames.

We disagree with the commenters' conclusion. As discussed in the NRPM, industry and Boeing testing have shown that offset loading of intermodal containers can allow the cargo to shift, which would be unsafe under certain flight load conditions. (The AD docket contains a Boeing presentation summarizing these test results.) The purpose of this AD, and all ADs, is to correct an unsafe condition regardless of whether that condition has caused accidents in the past.

Furthermore, in general, the shifting of cargo in flight has resulted in numerous incidents and accidents. For example, on August 7, 1997, Fine Air Flight 101 crashed shortly after takeoff from Miami because cargo shifted.

<sup>1</sup> The FAA recently approved a supplement to the Boeing Model 747 WBMs that allows strapping of cargo to a pallet under limited circumstances that are not relevant to this rulemaking.

Similarly, all evidence indicates that on April 29, 2013, National Airlines Flight 102 crashed shortly after takeoff from Bagram, Afghanistan, because cargo shifted. We have not changed this final rule regarding this issue.

#### **Request To Withdraw NPRM (79 FR 71037, December 1, 2014): Proposal Based on Unfounded Principles**

Atlas Air, the Cargo Airline Association, Kalitta, NACA, and United Parcel Service (UPS) requested that we withdraw the NPRM (79 FR 71037, December 1, 2014) because it misstates an important principle. The commenters noted that the NPRM stated that "the Weight and Balance Manual is part of the Operating Limitations section of the Airplane Flight Manual (AFM)." The commenters asserted that a reader could infer from this that all content in an airplane manufacturer's WBMs is part of the Operating Limitations section of the AFM. The commenters contended that since Boeing's Model 747 WBMs contain operating procedures in addition to operating limitations, only portions of the WBMs are part of the Operating Limitations section of the AFM. The commenters also noted that Boeing frequently revises the WBMs, and when Boeing does so, Boeing does not amend the type certificate, which the commenters assert would be "a laborious process."

We agree with the commenters' proposition that not all of a manufacturer's WBM is necessarily part of the AFM operating limitations, but we disagree with their assertion that FAA-approved loading instructions are not operating limitations. We also disagree with the commenters' request to change the rule as originally proposed. As provided in 14 CFR 25.1583(c), the WBM is referenced in the AFM and contains operating limitations approved under that section. Section 25.1583(c)(2) requires that the AFM include loading instructions that are necessary to ensure loading of the airplane within the weight and center of gravity limits, and to maintain the loading within these limits in flight. While the Boeing Model 747 WBMs may include information other than limitations, the loading instructions discussed previously are limitations, and the FAA approved the Boeing Model 747 WBMs based on a determination that, as operating limitations, these instructions were adequate to meet the requirements of 14 CFR 25.1583.

For many years the FAA has recognized that both the weight and balance information and the loading instructions are operating limitations.



For example, in FAA Advisory Circular (AC) 25.1581-1, dated July 14, 1997 ([http://rgl.faa.gov/Regulatory\\_and\\_Guidance\\_Library/rgAdvisoryCircular.nsf/0/cb7efbddd420bd265862569b3005479d7/\\$FILE/AC25-1581-1.pdf](http://rgl.faa.gov/Regulatory_and_Guidance_Library/rgAdvisoryCircular.nsf/0/cb7efbddd420bd265862569b3005479d7/$FILE/AC25-1581-1.pdf)), the FAA stated, in Section 2b(1), “Any limitations on airplane loading associated with the stated weight limitations must be included in the AFM or addressed in a separate weight and balance document.”

These loading instructions are the procedures that Boeing determined were necessary to load and restrain cargo for flight loads; these instructions are used to show compliance with the design requirements for the airplane, including the structural capabilities of the cargo loading system, airplane floors, and fuselage, and are therefore operating limitations. The types of ULDs and methods to restrain cargo are limitations provided in the Boeing Model 747 WBMs that ensure the airplane structure is not overloaded throughout the airplane’s defined flight envelope. For this reason, additions to the approved list of ULDs or deviations to the structural tie-down locations that are not approved through the type certification process result in noncompliant and unknown conditions that could result in the structural overload to the airplane under certain flight loads.

Adopting the commenters’ argument that these loading instructions are not limitations and, therefore, not mandatory would lead to the anomalous result that, while the weight and balance limitations are mandatory, the means to ensure they are complied with are not.

Regarding the commenter’s statement that Boeing frequently changes the WBMs, those changes are in fact changes to the type certificate, which are approved by the FAA or its designees. We have not changed this final rule regarding this issue.

#### **Opposition to NPRM (79 FR 71037, December 1, 2014): AD Approach Is Overly Broad and Burdensome**

Kalitta asserted that the NPRM (79 FR 71037, December 1, 2014) appears to assume that the offset configuration is already forbidden because it is not explicitly provided for in the Boeing Model 747 WBMs—i.e., unless the loading of a specific ULD or type of cargo and configuration is specifically defined in the Boeing Model 747 WBMs, it is prohibited. The commenter asserted that this is a novel interpretation and is unduly restrictive, contrary to accepted and normal air carrier operations and

contrary to the FAA’s own guidance material, and will have a significant and far-reaching operational and economic impact on all U.S. air carriers in the future, no matter what kind of aircraft they operate. The commenter stated that the FAA should carefully consider the ramifications of adopting a policy of “what is not explicitly allowed is forbidden.” The commenter stated that this approach reaches well beyond the particular matter at hand, and can create a regulatory environment that stifles innovation, and requires a manufacturer or the FAA to think in advance of every kind of operation that may possibly arise, and provide for it in the regulatory documents. According to the commenter, this would create an impossible burden on government and industry both.

We disagree with the commenter’s assertions. As discussed previously, the Boeing Model 747 WBMs define safe and compliant methods for loading the airplane. The Boeing Model 747 WBMs provide the instructions required by 14 CFR 25.1583, enabling the operators to load and restrain cargo in a manner that does not permit the shifting of cargo during flight, which could cause damage to the airplane or result in a configuration leading to the loss of control of the airplane. As discussed previously, these instructions are considered operating limitations. Operation of the airplane beyond those limits is not permitted by the Boeing Model 747 WBMs. Section 121.135(b)(21) requires operators to include in their manuals methods and procedures for maintaining the aircraft weight and center of gravity within approved limits. The unsafe condition addressed in this AD is a result of operators having adopted methods and procedures that are contrary to the WBM instructions and, as a result, not within the approved limits.

Innovations are acceptable provided they meet the limits specified in the WBMs. Innovations that exceed those limits must be approved as changes to the WBM, as required by subparts D and E of 14 CFR part 21, and as provided in FAA Order 8110.4C, dated March 28, 2007 ([http://rgl.faa.gov/Regulatory\\_and\\_Guidance\\_Library/rgOrders.nsf/0/d21193af2d37a8ba862570ab0054c104/\\$FILE/8110.4C\\_CHG5\\_Incorporated.pdf](http://rgl.faa.gov/Regulatory_and_Guidance_Library/rgOrders.nsf/0/d21193af2d37a8ba862570ab0054c104/$FILE/8110.4C_CHG5_Incorporated.pdf)), which describes the process for obtaining FAA approval for changes to the airplane’s type certificate. We have not changed this final rule regarding this issue.

#### **Opposition to NPRM (79 FR 71037, December 1, 2014): Unrealistic Cost Estimate**

Cargo Airline Association, Atlas Air, IATA, NACA, and Kalitta alleged that the FAA’s determination of the estimated costs to comply with the NPRM (79 FR 71037, December 1, 2014) is fundamentally flawed because it is based on an unreasonably narrow view of the AD’s costs and, as a result, the FAA’s cost estimate is unrealistically low. The commenters concluded that the AD, if issued as proposed, would have significant, multi-million dollar cost consequences and competitiveness implications for all U.S. Model 747 freighter operators, with no appreciable countervailing safety benefits. In particular, the commenters stated that when intermodal containers are carried in the offset manner, additional cargo can be carried in the adjacent cargo pallet positions. The commenters further asserted that if the intermodal containers are required to be restrained to the airplane, the necessary restraint configuration would preclude the carriage of the adjacent positions and that revenue from the adjacent positions would be lost.

We do not agree with the commenters’ allegations. As discussed previously and in the NPRM, carriage of offset containers is contrary to the limitations in the Boeing Model 747 WBMs and, therefore, contrary to 14 CFR 91.9(a). The intent of this AD is to require operators to revise their AFMs in a manner that eliminates this already-noncompliant practice, which we have determined creates an unsafe condition. Based on the FAA’s determination that this conduct is noncompliant, the FAA has already directed individual operators not to carry intermodal containers using the offset method.<sup>2</sup> Issuance of this AD fulfills the FAA’s international obligations of informing foreign airworthiness authorities of the existence of this unsafe condition and of the appropriate means for addressing it, as well as reinforces the determination discussed previously.

Moreover, the cost associated with ceasing noncompliant conduct is not attributable to this AD, regardless of how profitable that conduct may be. The cost information in AD actions describes only the direct costs of the specific action required by the AD—in this case, revising the AFM. We recognize that, in doing the actions required by an AD, operators might incur operational costs in addition to the direct costs. The cost

<sup>2</sup> For example, a letter dated May 2, 2014, directing Kalitta to discontinue this practice is included in the docket.

analysis in AD rulemaking actions, however, typically does not include incidental or operational costs such as the time required for planning or other administrative actions. Our analysis also would not include possible revenue lost as a result of ending noncompliant operations. The FAA recognizes that the reason operators carry intermodal containers in violation of the Boeing Model 747 WBM limitations is that it is more profitable. The amount of revenue that could be generated when cargo is carried in a noncompliant manner is almost impossible to calculate.

We have not changed this final rule regarding this issue.

**Opposition to NPRM (79 FR 71037, December 1, 2014): Economic Impact on Small Entities**

Kalitta and the Michigan Senate stated that the NPRM (79 FR 71037, December 1, 2014) fails to account for impact on small entities because most airlines that would be affected by the NPRM have fewer than 1,500 employees. The commenters stated that this is a significant economic impact by loss of revenue.

As discussed previously, we have determined that there is no significant impact on air carriers in the United States because loading offset intermodal containers is contrary to the limitations of the Boeing Model 747 WBMs, and is therefore already prohibited. That is, whether or not this final rule is issued, the practice of carrying intermodal containers in the offset method is not permitted for U.S. air carriers as it is a noncompliant and unsafe practice.

**Opposition to NPRM (79 FR 71037, December 1, 2014): Inadequate Testing**

Cargo Airline Association, Atlas Air, NACA, IATA, Kalitta, and the Michigan Senate criticized the tests discussed in the NPRM (79 FR 71037, December 1, 2014) that confirmed the FAA's determination that loading containers in the offset position is an unsafe condition, arguing they were unrealistic or inconclusive. In general, the commenters claimed that the tests used configurations of intermodal containers and their restraints that are different from those used in service and applied pass-fail criteria that were unnecessarily stringent.

We do not agree that the tests were unrealistic or inadequate. A detailed discussion of the commenters' technical concerns regarding the tests is included in the AD docket.

In short, the tests of offset intermodal containers discussed in the NPRM included a range of configurations, including those that the participants,

including Boeing and cargo operators, considered necessary to show compliance to the regulations, and even a scenario using empty containers. The tests demonstrated that offset intermodal containers would not be restrained securely for flight loads such as heavy turbulence. As discussed previously, loading offset intermodal containers is already contrary to the limitations of the Boeing Model 747 WBMs. If commenters believe that they can show compliance with the applicable part 25 airworthiness standards using offset containers, they may apply for supplemental type certificates (STCs). Any such STCs, if granted, would also be considered as a possible alternative method of compliance (AMOC) to this AD.

**Request To Delay Issuance of AD Pending Acceptance of New Testing**

Kalitta, NACA, and the Michigan Senate requested that we delay issuing a final AD because new testing by Kalitta shows that the offset configuration can be used without posing a threat to safety.

We disagree with the request. The test process and results have not been submitted to the FAA for approval. However, if the testing is completed and approved, it may serve as the basis for a new STC, which we would then consider as a possible AMOC to this AD. We have not changed this final rule regarding this issue.

**Request To Withdraw NPRM (79 FR 71037, December 1, 2014): Unnecessary Based on New Operating Specifications**

Cargo Airline Association, IATA, Kalitta, NACA, and the Michigan Senate requested that we withdraw the NPRM (79 FR 71037, December 1, 2014). IATA recently issued Operating Specification (OS) 6/13 (ULD: Operating Specifications). According to the commenters, IATA OS 6/13 provides guidance for safely handling multiple configurations of offset sea-land (intermodal) containers and ensuring the effectiveness and ultimate load strength of tie-down arrangements. The commenters asserted that offset methods for intermodal containers developed in the 1970s by some airlines had received Boeing support and approval.

We disagree with the request. The commenters did not submit data to show how IATA OS 6/13 complies with the applicable regulations. Further, IATA OS 6/13 documents procedures similar to those found to have failed early on in the testing described in the preamble to the NPRM. For example, these procedures include strapping the intermodal container to the pallet, and

not directly to the airplane. In fact, the procedures described in IATA OS 6/13 are contrary to the Boeing Model 747 WBMs for the reasons discussed previously.

The commenters provided no evidence of Boeing support and approval regarding use of offset methods. Boeing's comments did not include any statement that offset carriage of intermodal containers without restraint directly to the airplane complies with the Boeing Model 747 WBMs. Neither the FAA nor Boeing has found any evidence that Boeing was involved in or aware of the carriage of intermodal containers in the 1970s.

We have not changed this final rule regarding this issue, although any operator may request approval of an AMOC for use of an STC WBM supplement. However, in this case, because IATA OS 6/13 is so similar to the documented tested failures, new test data would be required to show that the IATA method meets the applicable airworthiness requirements to support approval of an STC.

**Request To Allow Offset Containers, If Strapped to Airplane**

Atlas Air, Boeing, AirbridgeCargo Airlines LLC (AirbridgeCargo), NACA, and UPS requested that the intermodal containers be allowed to be loaded offset on the pallet, provided that the containers are restrained directly to the airplane by retention straps. A number of the commenters stated that this practice is already allowed by the WBMs and that they currently use this method.

We disagree with the request. None of the commenters provided any actual data demonstrating a compliant restraint method to the airplane for an offset intermodal container. Further, none have demonstrated that they currently use a method complying with the Boeing WBMs. The Boeing Model 747 WBMs describe how to restrain cargo, offset or not, as special cargo restrained to the airplane; however, when the cargo is restrained correctly to the airplane, so many straps would be attached to so many locations on the aircraft that no cargo could be carried adjacent to the offset intermodal container. Thus, the benefit of increased capacity gained by installing an offset container would be lost. Therefore, the FAA finds it unlikely that operators are actually using compliant methods to restrain offset intermodal containers.

We have not changed this final rule regarding this issue. However, under the provisions of paragraph (i) of this AD, we will consider requests for approval of an AMOC if sufficient data are

submitted to substantiate that the alternative method would provide an acceptable level of safety. These data would need to include the compliant restraint methodology.

**Request To Withdraw NPRM (79 FR 71037, December 1, 2014): Unlevel Playing Field With International Carriers**

Kalitta and the Michigan Senate requested that we withdraw the NPRM (79 FR 71037, December 1, 2014). They asserted that by issuing this AD we provide their foreign competitors with a significant competitive advantage. Kalitta stated that while the FAA may believe that incorporation of these restrictions into an AD will solve the competition problem by “leveling the playing field,” as they will apply to all U.S. carriers, and will be adopted by many foreign governments, the agency needs to reconsider this position. The commenters added that foreign authorities may or may not adopt the AD as written, but they have wide latitude in what sort of AMOCs they will permit their carriers to use. The commenters also stated that foreign authorities will very likely look to the IATA standards to provide an acceptable AMOC, enabling their carriers to continue to operate in the very manner that will be foreclosed to U.S. air carriers.

Kalitta asserted that this “unexpected gift to foreign airlines” is not necessitated by safety of flight, and is contrary to the policy considerations mandated by Congress in the International Air Transportation Competition Act (49 U.S.C. 40101), which requires the Secretary of Transportation to strengthen the competitive position of air carriers to ensure at least equality with foreign air carriers, including the attainment of the opportunity for air carriers to maintain and increase their profitability in air foreign transportation. According to the commenters, this obviously does not mean that the FAA should ignore serious safety issues out of concern for U.S. carriers’ competitive position, but that the agency must take account of U.S. carriers’ financial health and competitive standing, and avoid adopting measures and policies that harm carriers unless they are absolutely necessary.

We disagree with the request. Section 44701 of 49 U.S.C. requires the FAA to promote the safe flight of civil aircraft by, among other things, prescribing regulations and minimum standards for aircraft. In addition, the International Civil Aviation Organization (ICAO) Annex 8, Airworthiness of Aircraft

([http://www.icao.int/safety/airnavigation/NationalityMarks/annexes\\_booklet\\_en.pdf](http://www.icao.int/safety/airnavigation/NationalityMarks/annexes_booklet_en.pdf)) requires that civil aviation authorities of other countries take appropriate action in response to FAA ADs. Based on the FAA’s determination of the unsafe condition addressed by this AD, we expect foreign authorities to adopt similar requirements. Regarding the potential for other civil aviation authorities to adopt IATA’s procedures as an AMOC for their ADs, as discussed previously, the IATA procedures are similar to those that have been tested previously and that the FAA considers to be unsafe. We have no reason to believe other authorities would reach a different conclusion.

We have not changed this final rule regarding this issue.

**Request To Withdraw NPRM (79 FR 71037, December 1, 2014) or Delay Issuance of AD Pending WBM Revision**

NACA and AirbridgeCargo requested that we delay issuance of the AD until all new testing is completed. Based on its understanding of the current round of testing, NACA stated that there is a strong likelihood the Boeing Model 747 WBMs will be revised. AirbridgeCargo proposed that further research be done to establish a weight limit for intermodal containers. The commenters therefore preferred a revised WBM to an AD, which would also allow U.S. cargo carriers to fully compete with foreign carriers on a level playing field.

We disagree with the request. To date, all testing to support a revision to the Boeing Model 747 WBMs has been unsuccessful. Although there is a current plan for more testing by a U.S. air carrier to support an STC application, it is unclear if the testing will be successful and when it will be completed. If the testing resumes and provides a successful conclusion, and if sufficient data are submitted to substantiate that the products or alternative methods would provide an acceptable level of safety, the FAA could consider new methods or products as acceptable for compliance with the requirements of this AD. We have not changed this final rule regarding this issue.

**Request To Change Requirement To Revise AFM**

Boeing requested that we revise paragraph (g) of the proposed AD (79 FR 71037, December 1, 2014), which proposed to require revising the Operating Limitations section of the AFM. Boeing stated that airlines are not able to revise a Boeing AFM. Boeing requested that we change the

requirement to “insert a copy of this AD into the Limitations section of the AFM.”

We disagree with the request. Paragraph (g) of the proposed AD (79 FR 71037, December 1, 2014) would allow operators to insert a copy of this AD into the Limitations section of the AFM. However, operators may also comply with this AD by revising the operating limitations. Operating limitations are a part of the type certificate for an airplane. For many years, we have imposed operating restrictions that are necessary to address identified unsafe conditions by requiring revisions to the Operating Limitations section of the AFM. For this reason, as stated in the NPRM (79 FR 71037, December 1, 2014), we must engage in rulemaking (*i.e.*, issuance of an AD) in order to make the revisions mandatory for previously type-certificated airplanes. While the Boeing Model WBMs are contained in a “Boeing document” in the sense that Boeing originally produced it, the document, nevertheless, is a part of the airplane flight manual that operators must use to operate the airplane properly. Of course, those operators that have previously revised the required AFM limitations are given credit for having previously accomplished the requirements of this AD, as allowed by paragraph (f) of this AD. The legal effect is the same: The operator is required to comply with the limitations referenced in 14 CFR 91.9(a). We have not changed this final rule regarding this issue.

**Request To Revise Description of Issue Prompting Rulemaking**

Boeing requested that we revise the description of the issue that prompted the NPRM (79 FR 71037, December 1, 2014). The NPRM stated that recent testing indicates that intermodal containers, when loaded as cargo, can shift. While implicitly agreeing that loading offset containers is unsafe unless they are restrained directly to the airplane, Boeing requested that we change the wording to explain that the condition is limited to “cargo using a TSO-C90 certified ULD.”

We disagree with the requested change. The **SUMMARY** section of this final rule and paragraph (e) of this AD go on to explain that intermodal containers loaded in the offset method are the subject of this AD, and the type of ULD does not change the unsafe condition. Further, not all Boeing Model 747 WBMs refer to TSO-C90; several refer directly to the TSO-C90-required document NAS 3610. We have therefore not revised this final rule regarding this issue.

### Request To Delete Reference to TSO Revision Level

Boeing and UPS stated that the **SUPPLEMENTARY INFORMATION** section of the NPRM (79 FR 71037, December 1, 2014) referred to a “TSO–C90D” pallet. Revision D is the latest issue of TSO–C90, and per the WBM’s applicable to Boeing Model 747 airplanes, approved ULDs for carriage may conform to the TSO–C90 revision to which they were certified. UPS recommends revising the Discussion section of the NPRM to remove the revision level when TSO–C90 is referenced.

We agree that the revision level of TSO–C90 does not matter; an intermodal container conforms to none of the revision levels. However, the Discussion section of the NPRM (79 FR 71037, December 1, 2014) is not repeated in this final rule. No change to this final rule is necessary.

### Conclusion

We reviewed the relevant data, considered the comments received, and determined that air safety and the public interest require adopting this AD as proposed—except for minor editorial

changes. We have determined that these minor changes:

- Are consistent with the intent that was proposed in the NPRM (79 FR 71037, December 1, 2014) for correcting the unsafe condition; and
- Do not add any additional burden upon the public than was already proposed in the NPRM (79 FR 71037, December 1, 2014).

### Costs of Compliance

We estimate that this AD affects 98 airplanes of U.S. registry. We estimate the following costs to comply with this AD:

### ESTIMATED COSTS

Action	Labor cost	Parts cost	Cost per product	Cost on U.S. operators
AFM revision .....	1 work-hour × \$85 per hour = \$85 .....	\$0	\$85	\$8,330

### Authority for This Rulemaking

Title 49 of the United States Code specifies the FAA’s authority to issue rules on aviation safety. Subtitle I, section 106, describes the authority of the FAA Administrator. Subtitle VII: Aviation Programs, describes in more detail the scope of the Agency’s authority.

We are issuing this rulemaking under the authority described in Subtitle VII, Part A, Subpart III, Section 44701: “General requirements.” Under that section, Congress charges the FAA with promoting safe flight of civil aircraft in air commerce by prescribing regulations for practices, methods, and procedures the Administrator finds necessary for safety in air commerce. This regulation is within the scope of that authority because it addresses an unsafe condition that is likely to exist or develop on products identified in this rulemaking action.

### Regulatory Findings

This AD will not have federalism implications under Executive Order 13132. This AD will not have a substantial direct effect on the States, on the relationship between the national government and the States, or on the distribution of power and responsibilities among the various levels of government.

For the reasons discussed above, I certify that this AD:

- (1) Is not a “significant regulatory action” under Executive Order 12866,
- (2) Is not a “significant rule” under DOT Regulatory Policies and Procedures (44 FR 11034, February 26, 1979),
- (3) Will not affect intrastate aviation in Alaska, and

(4) Will not have a significant economic impact, positive or negative, on a substantial number of small entities under the criteria of the Regulatory Flexibility Act.

### List of Subjects in 14 CFR Part 39

Air transportation, Aircraft, Aviation safety, Incorporation by reference, Safety.

### Adoption of the Amendment

Accordingly, under the authority delegated to me by the Administrator, the FAA amends 14 CFR part 39 as follows:

### PART 39—AIRWORTHINESS DIRECTIVES

- 1. The authority citation for part 39 continues to read as follows:

**Authority:** 49 U.S.C. 106(g), 40113, 44701.

#### § 39.13 [Amended]

- 2. The FAA amends § 39.13 by adding the following new airworthiness directive (AD):

#### 2015–14–09 The Boeing Company:

Amendment 39–18207; Docket No. FAA–2014–0780; Directorate Identifier 2014–NM–168–AD.

#### (a) Effective Date

This AD is effective August 17, 2015.

#### (b) Affected ADs

None.

#### (c) Applicability

This AD applies to The Boeing Company Model 747–100, 747–100B, 747–100B SUD, 747–200B, 747–200C, 747–200F, 747–300, 747–400, 747–400D, 747–400F, 747SR, 747SP, 747–8F, and 747–8 series airplanes,

certificated in any category, equipped with a main deck side cargo door (MDSCD).

#### (d) Subject

Air Transport Association (ATA) of America Code 53, Fuselage.

#### (e) Unsafe Condition

This AD was prompted by recent testing that indicates that intermodal containers, when loaded as cargo, under certain flight-load conditions, can shift and impact the adjacent fuselage frames. We are issuing this AD to prevent intermodal containers loaded in the offset method from shifting during flight gust loads and damaging fuselage frames, which could lead to the structural failure of the aft fuselage in flight, and subsequent in-flight breakup of the airplane.

#### (f) Compliance

Comply with this AD within the compliance times specified, unless already done.

#### (g) Revision of Airplane Flight Manual (AFM)

Within 14 days after the effective date of this AD, revise the Operating Limitations section of the FAA-approved AFM to include the information in figure 1 to paragraph (g) of this AD. This may be accomplished by inserting a copy of this AD into the Limitations section of the AFM.

### FIGURE 1 TO PARAGRAPH (g) OF THIS AD—AFM REVISION

Unless approved by the Manager of the Seattle Aircraft Certification Office, the carriage of the following payloads is prohibited:

# FIGURE 1 TO PARAGRAPH (g) OF THIS AD—AFM REVISION—Continued

- (1) Intermodal containers nominally sized at 20 feet long, 8 feet wide, and 8.5 feet tall that are not concentrically loaded on a pallet and restrained to the aircraft in accordance with the FAA-approved Boeing type certificate Weight and Balance Manual or a supplemental type certificate Weight and Balance Supplement.
- (2) ISO 668-1CC containers that are not concentrically loaded on a pallet and restrained to the aircraft in accordance with the FAA-approved Boeing type certificate Weight and Balance Manual or a supplemental type certificate Weight and Balance Supplement.

**Note:** Both payloads 1 and 2 may be concentrically loaded on a pallet and netted in accordance with the FAA-approved Weight and Balance Manual and then loaded in the center of the airplane and restrained to the airplane by the approved center loaded cargo restraint system or restrained directly to the airplane, both as defined in the FAA-approved Weight and Balance Manual.

## (h) Special Flight Permits

Special flight permits, as described in Section 21.197 and Section 21.199 of the Federal Aviation Regulations (14 CFR 21.197 and 21.199), are not allowed if any intermodal container prohibited as specified in figure 1 to paragraph (g) of this AD is on board. For special flight permits, carriage of freight is not allowed.

## (i) Alternative Methods of Compliance (AMOCs)

(1) The Manager, Seattle Aircraft Certification Office (ACO), FAA, has the authority to approve AMOCs for this AD, if requested using the procedures found in 14 CFR 39.19. In accordance with 14 CFR 39.19, send your request to your principal inspector or local Flight Standards District Office, as appropriate. If sending information directly to the manager of the ACO, send it to the attention of the person identified in paragraph (j) of this AD. Information may be emailed to: [9-ANM-Seattle-ACO-AMOC-Requests@faa.gov](mailto:9-ANM-Seattle-ACO-AMOC-Requests@faa.gov).

(2) Before using any approved AMOC, notify your appropriate principal inspector, or lacking a principal inspector, the manager of the local flight standards district office/certificate holding district office.

## (j) Related Information

For more information about this AD, contact Steven C. Fox, Senior Aerospace Engineer, Airframe Branch, ANM-120S, FAA, Seattle Aircraft Certification Office (ACO), 1601 Lind Avenue SW., Renton, WA 98057-3356; phone: 425-917-6425; fax: 425-917-6590; email: [steven.fox@faa.gov](mailto:steven.fox@faa.gov).

## (k) Material Incorporated by Reference

None.

Issued in Renton, Washington, on July 7, 2015.

Jeffrey E. Duven,

Manager, Transport Airplane Directorate, Aircraft Certification Service.

[FR Doc. 2015-17031 Filed 7-10-15; 8:45 am]

BILLING CODE 4910-13-P

## DEPARTMENT OF COMMERCE

### Bureau of Industry and Security

### 15 CFR Parts 736, 740, 744, 748, and 774

[Docket No. 150325297-5297-01]

RIN 0694-AG59

### Clarifications and Corrections to the Export Administration Regulations (EAR): Control of Spacecraft Systems and Related Items the President Determines No Longer Warrant Control Under the United States Munitions List (USML)

**AGENCY:** Bureau of Industry and Security, Department of Commerce.

**ACTION:** Final rule.

**SUMMARY:** This final rule makes additional clarifications and corrections to the interim final rule that was published on May 13, 2014. The May 13 rule added controls to the Export Administration Regulations (EAR) for spacecraft and related items that the President has determined no longer warrant control under United States Munitions List (USML) Category XV—spacecraft and related items.

The changes included in this final rule are limited to corrections and clarifications to what was included in the interim final rule. This is the second corrections and clarifications rule BIS has published for the May 13 rule. These corrections and clarifications were also informed by comments received in response to the May 13 rule that included a request for comments.

The corrections and clarifications to the May 13 rule are also part of Commerce's retrospective regulatory review plan under Executive Order (EO) 13563 (see the **SUPPLEMENTARY INFORMATION** section of this rule for information on the availability of the plan).

**DATES:** This rule is effective July 13, 2015.

**FOR FURTHER INFORMATION CONTACT:** For questions about the ECCNs included in this rule, contact Dennis Krepp, Office of National Security and Technology Transfer Controls, Bureau of Industry and Security, U.S. Department of

Commerce, Telephone: 202-482-1309, email: [Dennis.Krepp@bis.doc.gov](mailto:Dennis.Krepp@bis.doc.gov). For general questions about the regulatory changes pertaining to satellites, spacecraft, and related items, contact the Regulatory Policy Division, Office of Exporter Services, Bureau of Industry and Security, at 202-482-2440 or email: [rpd2@bis.doc.gov](mailto:rpd2@bis.doc.gov).

## SUPPLEMENTARY INFORMATION:

### Background

This final rule makes corrections and clarifications to the interim final rule, *Revisions to the Export Administration Regulations (EAR): Control of Spacecraft Systems and Related Items the President Determines No Longer Warrant Control Under the United States Munitions List (USML)*, that was published on May 13, 2014 (79 FR 27417) (May 13 rule). The May 13 rule added controls to the Export Administration Regulations (EAR) for spacecraft and related items that the President has determined no longer warrant control under United States Munitions List (USML) Category XV—spacecraft and related items. The vast majority of the changes included in the May 13 rule have been implemented as published in the interim final rule and are not republished in this final rule. A full description of those changes can be found in the Background section and the regulatory text of the May 13 rule. BIS also published corrections and clarifications to the May 13 rule in a final rule published on November 12, 2014 (79 FR 67055).

The changes included in this final rule are limited to corrections and clarifications to what was included in the May 13 rule but are also informed by comments received in response to the May 13 rule. These corrections and clarifications to the May 13 rule are described below.

In § 736.2 (General Prohibitions), this final rule revises the heading of paragraph (b)(3)(iii) (Additional country scope of prohibition for 9x515 or “600 series” items) to remove the term “additional.” The country scope of prohibition of paragraph (b)(3)(iii) for the 9x515 and “600 series” items is specified in this paragraph for purposes of General Prohibition Three. The country scope of prohibition of paragraph (b)(3)(iii) for the 9x515 items applies to destinations in Country Groups D:5 and E:1 (see Supplement No. 1 to part 740 of the EAR). However, because of the use of the term “additional” in the heading of paragraph (b)(3)(iii), BIS has received questions from the public whether the country scope of prohibition specified in paragraph (b)(3)(i) also needs to be

considered for purposes of the 9x515 items. The country scope of paragraph (b)(3)(i) does not apply to 9x515 items, so this final rule revises the heading of paragraph (b)(3)(iii) to clarify this point by removing the term “additional.” This rule does not change the country scope of prohibition for the 9x515 or “600 series” items. Reexporters are reminded that the country scope of prohibition for the “600 series” items, which includes Country Groups D:1, D:3, D:4, D:5 or E:1, is broader than that for 9x515 items.

In § 740.20 under paragraph (d) (Prior Consignee Statement), this final rule revises the introductory text of paragraph (d)(2) to remove two sentences that were intended to be removed in a December 29, 2014 (79 FR 77866) final rule, but were not removed as intended because of ambiguity in the amendatory instruction. This rule removes the two outdated sentences. This final rule sets out the full text of paragraph (d)(2) to ensure the text of this paragraph accurately reflects past revisions of the EAR.

In addition, this final rule makes three minor clarifications to the text of paragraph (d)(2) to make the intent of the paragraph clearer. First, this rule removes the term “and” in the phrase “exporter, reexporter and transferor” and replaces it with “or” in two places in paragraph (d)(2). This clarification is made because the party making the export, reexport or transfer (in-country) authorized under License Exception STA is the person responsible for obtaining the prior consignee statement and maintaining a log or other record consistent with the requirements of paragraph (d)(2). The use of the term “and” may have given the misimpression that the exporter receiving the prior consignee statement would also need to obtain a prior consignee statement for subsequent transfers (in-country) or reexports authorized under License Exception STA, which is not required under paragraph (d)(2). Second, this final rule adds the parenthetical phrase “(such as documents created in the ordinary course of business)” to provide an example of an “other record” in paragraph (d)(2). Third, this final rule adds an “(S)” at the end of the terms “NAME” and “CONSIGNEE” in the bracketed text at the end of paragraph (d)(2). Making these two terms plural clarifies that multiple consignees may be included on the same prior consignee statement, provided all of the applicable requirements of paragraph (d)(2) are met. This is an existing BIS interpretation of paragraph (d)(2) that this edit clarifies.

In § 744.21 (Restrictions on certain ‘military end uses’ in the People’s Republic of China (PRC) or for a ‘military end use’ or ‘military end user’ in Russia or Venezuela), this final rule revises the general prohibition in paragraph (a)(2) in § 744.21 for the 9x515 and “600 series” ECCNs to clarify that the use in, with, or for the International Space Station (ISS) for exports, reexports, or transfers within Russia of these 9x515 and “600 series” items is not within the scope of the general prohibition, including launch to the ISS. Exports, reexports, and transfers (in-country) to China and Venezuela are not eligible for the ISS exclusion from the § 744.21 license requirements in paragraph (a)(2) because China and Venezuela are not ISS partner countries, unlike Russia, which is an ISS partner country.

In Supplement No. 2 to part 748 (Unique application and submission requirements), this final rule revises the introductory text of paragraphs (y)(1) and (y)(2) to clarify that for purposes of the license applications for satellite exports, the requirements specified in paragraphs (y)(1)(i) and (ii) and (y)(2)(i) and (ii), respectively, can be met either at the time of application or prior to export or reexport.

*ECCN 3A611.* This final rule makes a clarification to the Related Controls paragraph (6) in ECCN 3A611 by adding two references to the 9x515 ECCNs. These references added in this rule clarify that electronic items “specially designed” for military application that are not controlled in any USML category but are within the scope of a 9x515 ECCN are controlled by that 9x515 ECCN. This Related Controls paragraph (6) already established this relationship between 3A611 and other “600 series” ECCNs, but references to the 9x515 ECCNs also need to be added to clarify the relationship between 3A611 and the 9x515 ECCNs. This clarification will help exporters determine when they should review ECCN 3A611 or a 9x515 ECCN when classifying electronic items. Lastly, this final rule corrects the last sentence of the Related Controls paragraph (6) to replace ECCN 0A604 that is referenced at the end of the paragraph with the correct ECCN 9A604. This change corrects a mistake in the cross reference for the ECCN referenced in this Related Controls paragraph (6).

*ECCN 9A515.* This final rule makes six corrections and clarifications to ECCN 9A515. Specifically, these corrections and clarifications are made to the MT Control in the License Requirement table, to the Related Definitions paragraph and to “items”

paragraphs (d), (e), (x) and (y) in the List of Items Controlled section, as described below.

*ECCN 9A515—MT Control.* This final rule revises the MT Control paragraph in the License Requirements section to add the phrase “microcircuits in” before the reference to 9A515.d and adds the new 9A515.e.2 to the MT controls. This final rule makes this change to add greater specificity regarding what parts of ECCN 9A515.d and 9A515.e.2 are controlled for MT reasons. This clarification also addresses questions BIS has received from the public and will align the ECCN’s text more closely with the MTCR Annex.

*ECCN 9A515—Related Definitions.* This final rule adds a definition of ‘microcircuit’ to clarify how the term is understood in the context of ECCN 9A515. This rule clarifies that for purposes of ECCN 9A515 a ‘microcircuit’ means a device in which a number of passive or active elements are considered as indivisibly associated on or within a continuous structure to perform the function of a circuit. The addition of the Related Definition will make the intent of this ECCN clearer. This ECCN 9A515 specific definition of ‘microcircuit’ does not change the meaning or interpretation of microcircuit under the EAR. The definition of ‘microcircuit’ this final rule adds to ECCN 9A515 is the same definition as found in ECCN 3A001 and also as defined by the Missile Technology Control Regime (MTCR) Annex. The ECCN 9A515 definition is limited to providing guidance on the application of the definition based on current BIS practice and past interpretive guidance BIS has provided, including how the term is defined in that ECCN on the CCL and by the MTCR.

*ECCN 9A515.d.* This final rule also revises items paragraph (d) in the List of Items Controlled section of ECCN 9A515 to conform to the intended commodities classified under this paragraph. In the introductory text of paragraph (d), this final rule adds MOSFETS to the parenthetical phrase that provides examples for microelectronic circuits classified under paragraph (d). Importantly, such MOSFETS are already classified under 9A515.d. In response to the public’s questions, however, this addition provides clarity without changing the scope of the ECCN. This final rule also adds the phrase “and discrete electronic components” to ECCN 9A515.d to help the public self-classify such items and avoid the need to submit classification requests. Lastly, this final rule removes the hyphen in the term “micro-circuits” in the

introductory text of paragraph (d) in the List of Items Controlled section of ECCN 9A515 to conform to the other uses of “microcircuits” in 9A515, including the clarifications being made in this rule where the term “microcircuits” is used in 9A515.

*ECCN 9A515.e.* This final rule also revises items paragraph (e) in the List of Items Controlled section of ECCN 9A515 to conform to the intended commodities classified under this paragraph. Because of an oversight in the control parameter added in the May 13 rule, certain commodities that were intended to be classified under this paragraph (e) were not classified under this ECCN 9A515. In order to address this oversight and provide additional clarity regarding the scope of this control parameter, this final rule makes the following changes to paragraph (e). In the introductory text of paragraph (e), this final rule adds MOSFETS to the parenthetical phrase that provides examples for microelectronic circuits classified under paragraph (e). Importantly, such MOSFETS are already classified under 9A515.e, so the impact of the addition of MOSFETS to the parenthetical phrase is limited to providing additional specificity to the phrase, in order to make it easier for the public to determine that such MOSFETS are classified under 9A515.e. BIS had received questions from the public on why BIS had not included MOSFETS in the illustrative parenthetical phrase and so, to assist the public and add greater specificity, BIS adds MOSFETS to the illustrative list. This final rule also adds the phrase “and discrete electronic components” to ECCN 9A515.e. Although BIS already classifies discrete electronic components under 9A515.e, the agency has received questions on this issue. The additional text will assist the public with self-classifying such items and avoid the submission of unneeded classification requests. This final rule also adds to ECCN 9A515 a definition of ‘microcircuit’ in the Related Definition as described above. Lastly, in the introductory text of paragraph (e), this final rule removes the term “all” before “characteristics” and adds in its place the phrase “meeting or exceeding the characteristics in either paragraph e.1 or e.2” to clarify that the control parameters specified in paragraph (e)(1) and (e)(2) are applied in the disjunctive. As a conforming change to the introductory text of paragraph (e), this final rule consolidates the control parameter of (e)(2) with paragraph (e)(1), removes the term “and” at the end of paragraph (e)(1) and adds in its place the term “or”. This final rule removes

the “AND”, but because of the consolidation of the control parameters of (e)(2) with paragraph (e)(1) and the use of “or” between the two control parameters in the revised paragraph (e)(1), this aspect of the clarification does not substantively change what is classified under paragraph (e).

Lastly, for the changes to paragraph (e), this final rule adds a new paragraph (e)(2) to clarify that microelectronic circuits and discrete components that meet the scope of the introductory text of paragraph (e), have a total dose  $\geq 5 \times 10^5$  Rads (Si) ( $5 \times 10^3$  Gy (Si)), and are not described in 9A515.d are also within the scope of ECCN 9A515.e. This is a correction to the control parameter of paragraph (e) that addresses questions BIS has received from the public regarding the classification of the commodities described under this revised paragraph (e)(2). Specifically, the commodities that meet the new control parameter under paragraph (e)(2) that this final rule adds to ECCN 9A515 are commodities that would have been classified under the United States Munitions List (USML) prior to the effective date of the May 13 rule. The Summary of the May 13 rule states that “New Export Control Classification Numbers (ECCNs) 9A515, 9B515, 9D515, and 9E515 created by this rule and existing ECCNs on the Commerce Control List (CCL) will control such items.” In other words, any item that was formerly classified under USML Category XV that was moved to the CCL would be classified under a 9x515 ECCN or in another ECCN on the CCL (such as one of the ECCNs that use space qualified). However, because of a mistake in the control parameter under paragraph (e) of ECCN 9A515, certain commodities that were intended to be classified in this ECCN inadvertently dropped to an EAR99 designation, which was contrary to the May 13 rule’s description of where the commodities formerly classified under USML Category XV would be classified on the CCL. As noted above, BIS has received inquiries from the public questioning the odd result and asking for clarification whether such commodities are intended to be EAR99, or if, as specified in the May 13 rule, the intent is for such items to be classified in 9A515.e. The questioners are correct that the intent was for such commodities to be classified under 9A515, and this final rule adds a control parameter to 9A515.e.2 to ensure consistency with the stated intent of the May 13 rule.

*ECCN 9A515.x.* This final rule revises paragraph (x) in the List of Items Controlled section. This final rule

revises the existing exclusions under paragraphs (1), (2) and (4) to clarify what commodities are not within the scope of paragraph (x). Specifically, under paragraph (1) this final rule adds a reference to ECCN 9A004 to clarify that commodities enumerated or controlled in 9A004 are not within the scope of 9A515.x. This final rule revises the existing exclusion under paragraph (2) by adding the phrase “discrete electronic components” to clarify that, in addition to microelectronic circuits, discrete electronic components are not within the scope of ECCN 9A515.x, a change that also conforms with the clarification being made to 9A515.e.2 described above. This final rule revises the existing exclusion under paragraph (4) to add ECCN 7A003.d.2 to the list of ECCNs containing “space-qualified” as a control criterion that are not within the scope of 9A515.x and deletes 3A002.a.3 because it is no longer needed. This final rule also revises the list of items excluded from paragraph (x) by adding paragraphs (5), (6), and (7). These additional exclusions clarify that the following commodities are also not within the scope of 9A515.x: microwave solid state amplifiers and microwave assemblies (refer to ECCN 3A001.b.4 for controls on these items); traveling wave tube amplifiers (refer to ECCN 3A001.b.8 for controls on these items); and commodities elsewhere specified in ECCN 9A515.y. These clarifications to the exclusions from paragraph (x) will address questions BIS has received from the public that asked whether certain commodities that were excluded from USML Category XV (on the basis of the former Note to USML Category XV) were classified in ECCN 9A515.x. General Order No. 5 in Supplement No. 1 to part 736 of the EAR under paragraph (e)(3) (Prior commodity jurisdiction determinations) already provides guidance that such commodities would not be classified under a 9A515 entry, but this final rule makes this reading explicit in the context of 9A515.x. This clarification makes no change to the scope of items classified under 9A515.x and merely provides additional guidance to assist the public in understanding the scope of 9A515, in particular as it relates to commodities that previously were determined to not be subject to the ITAR on the basis of the former Note to USML Category XV(e).

*ECCN 9A515.y.* This final rule adds a paragraph 9A515.y.1 as the first commodity specified under paragraph (y) in this ECCN. As noted in the introductory text of paragraph (y), the U.S. Government through the section



748.3(e) process will identify the items that warrant being classified under 9x515.y items, such as the commodities being specified under 9A515.y.1 in this final rule. Specifically, discrete electronic “components” not specified in 9A515.e have been identified in an interagency-cleared commodity classification (CCATS) pursuant to § 748.3(e) as warranting control in 9A515.y.1. This final rule also reserves paragraph (y.2) to conform to **Federal Register** drafting requirements.

The addition described above for ECCN 9A515.y.1 is the first approved population of a .y control being added to 9A515. As stated in the May 13 rule, BIS (along with State and Defense) will continue to populate the 9A515.y with additional entries as additional classification determinations are made in response to requests from the public under § 748.3(e).

**ECCN 9D001.** This final rule revises the NS Controls paragraph in the License Requirements section of ECCN 9D001 to add 9A004. ECCN 9A004 is included in the heading of 9D001, but is not included in the range of ECCNs identified in the NS Controls paragraph. ECCN 9A004 should have been added to the NS Controls paragraph in 9D001 to conform to the changes made to 9A004 in the May 13 rule. This final rule corrects this by adding ECCN 9A004 to the NS Controls paragraph for 9D001. In addition, for the purposes of clarification, this final rule revises the heading of ECCN 9D001 to remove the parenthetical phrase that follows 9A004 and revises the Related Controls paragraph of ECCN 9D001 to remove the reference to 9A004. These clarifications are made because there are no longer commodities that are subject to the ITAR in ECCN 9A004, so there is no need for the parenthetical phrase when referencing 9A004 in the heading of 9D001 and there is no need to reference 9A004 in the Related Controls paragraph of 9D001. Lastly, this final rule removes the parenthetical phrase “(see 22 CFR parts 120 through 130)” after the defined term “Subject to the ITAR” in the Related Controls paragraph of ECCN 9D002 because the text is redundant. The citation information is already included in the definition of “subject to the ITAR” in § 772.1 of the EAR and therefore does not need to be restated on the CCL.

**ECCN 9D002.** This final rule revises the NS Controls paragraph in the License Requirements section of ECCN 9D002 to add 9A004. ECCN 9A004 is included in the heading of 9D002, but is not included in the range of ECCNs identified in the NS Controls paragraph. ECCN 9A004 should have been added to

the NS Controls paragraph in 9D002 to conform to the changes made to 9A004 in the interim final rule. In addition, for the purposes of clarification, this final rule revises the heading of ECCN 9D002 to remove the parenthetical phrase that follows 9A004 and revises the Related Controls paragraph of ECCN 9D002 to remove the reference to 9A004. These clarifications are made because there are no longer commodities that are subject to the ITAR in ECCN 9A004, so there is no need for the parenthetical phrase when referencing 9A004 in the heading of 9D002 and there is no need to reference 9A004 in the Related Controls paragraph of 9D002. Lastly, this final rule removes the parenthetical phrase “(see 22 CFR parts 120 through 130)” after the defined term “Subject to the ITAR” in the Related Controls paragraph of ECCN 9D002 because the text is redundant as already noted above.

**ECCN 9D515.** This final rule reserves the “items” paragraphs (f) through (x) in the List of Items Controlled section and adds a new “items” paragraph (y) in ECCN 9D515. This change is made to conform to the changes made to 9A515.y. In addition, this final rule revises the NS and RS Controls paragraph in the License Requirements section to exclude software classified under 9D515.y from these controls. Similar to the “600 series” ECCNs, the (y) software and technology entries for the 9x515 items will be controlled at the same level as the related (y) commodities.

**ECCN 9E001.** This final rule revises the NS Controls paragraph in the License Requirements section of ECCN 9E001 to add 9A004. ECCN 9A004 is included in the heading of 9E001, but is not included in the range of ECCNs identified in the NS controls paragraph. ECCN 9A004 should have been added to the NS Controls paragraph in 9E001 to conform to the changes made to 9A004 in the interim final rule. This final rule corrects this by adding ECCN 9A004 to the NS Controls paragraph for 9E001. In addition, for the purposes of clarification, this final rule revises the heading of ECCN 9E001 to remove the parenthetical phrase that follows 9A004 and revises Related Controls paragraph (2) to remove the reference to 9A004. These clarifications are made because there are no longer commodities that are subject to the ITAR in ECCN 9A004, so there is no need for the parenthetical phrase when referencing 9A004 in the heading of 9E001 and there is no need to reference 9A004 in the Related Controls paragraph of 9E001. Lastly, this final rule removes the parenthetical phrase “(see 22 CFR parts 120 through

130)” after the defined term “Subject to the ITAR” in the Related Controls paragraph of ECCN 9E001 because the text is redundant as already noted above.

**ECCN 9E002.** Similar to the changes described above for ECCN 9E001, this final rule for clarification revises the heading of 9E002 to remove the parenthetical phrase that follows 9A004. In addition, for the purposes of clarification revises Related Controls paragraph (3) to remove the reference to 9A004. These clarifications are made because there are no longer commodities that are subject to the ITAR in ECCN 9A004, so there is no need for the parenthetical phrase when referencing 9A004 in the heading of 9E002 and there is no need to reference 9A004 in the Related Controls paragraph of 9E002. Lastly, this final rule removes the parenthetical phrase “(see 22 CFR parts 120 through 130)” after the defined term “Subject to the ITAR” in the Related Controls paragraph of ECCN 9E002 because the text is redundant as already noted above.

**ECCN 9E515.** This final rule reserves “items” paragraphs (f) through (x) in the List of Items Controlled section and adds a new “items” paragraph (y) to ECCN 9E515. This change is made to conform to the changes made to 9A515.y. In addition, this final rule revises the NS and RS Controls paragraph in the License Requirements section to exclude technology classified under 9E515.y from the controls in ECCN 9E515. Similar to the “600 series” ECCNs, the (y) software and technology entries for the 9x515 items will be controlled at the same level as the related (y) commodities. Lastly, this final rule revises the MT Control paragraph in the License Requirements section to add 9A515.e.2 to the MT controls. This final rule makes this change to conform to the changes described above for the MT controls in ECCN 9A515.e.2 and to conform to the MTCR Annex. The rule specifies that the control applies to technology for items in 9A515.d and 9A515.e.2 controlled for MT reasons.

#### *Addressing Public Comments Received*

The May 13 rule requested public comment by November 10, 2014. BIS is still in the process of reviewing the comments received at that time and will address them through a subsequent rulemaking.

As required by Executive Order (EO) 13563, BIS intends to review this rule’s impact on the licensing burden on exporters. Commerce’s full plan is available at: <http://open.commerce.gov/>



*news/2011/08/23/commerce-plan-retrospective-analysis-existing-rules.* Data are routinely collected on an ongoing basis, including through the comments to be submitted and as a result of new information and results from AES data. These results and data have been, and will continue to form, the basis for ongoing reviews of the rule and assessments of various aspects of the rule. As part of its plan for retrospective analysis under EO 13563, BIS intends to conduct periodic reviews of this rule and to modify, or repeal, aspects of this rule, as appropriate, and after public notice and comment. With regard to a number of aspects of this rule, assessments and refinements will be made on an ongoing basis. This is particularly the case with regard to possible modifications that will be considered based on public comments described above.

#### *Export Administration Act*

Although the Export Administration Act expired on August 20, 2001, the President, through Executive Order 13222 of August 17, 2001, 3 CFR, 2001 Comp., p. 783 (2002), as amended by Executive Order 13637 of March 8, 2013, 78 FR 16129 (March 13, 2013) and as extended by the Notice of August 7, 2014, 79 FR 46959 (August 11, 2014), has continued the Export Administration Regulations in effect under the International Emergency Economic Powers Act. BIS continues to carry out the provisions of the Export Administration Act, as appropriate and to the extent permitted by law, pursuant to Executive Order 13222 as amended by Executive Order 13637.

#### **Rulemaking Requirements**

1. Executive Orders 13563 and 12866 direct agencies to assess all costs and benefits of available regulatory alternatives and, if regulation is necessary, to select regulatory approaches that maximize net benefits (including potential economic, environmental, public health and safety effects, distribute impacts, and equity). Executive Order 13563 emphasizes the importance of quantifying both costs and benefits, of reducing costs, of harmonizing rules, and of promoting flexibility. This final rule has been determined to be not significant for purposes of Executive Order 12866.

2. Notwithstanding any other provision of law, no person is required to respond to, nor is subject to a penalty for failure to comply with, a collection of information, subject to the requirements of the Paperwork Reduction Act of 1995 (44 U.S.C. 3501 *et seq.*) (PRA), unless that collection of

information displays a currently valid OMB control number. This regulation involves collections previously approved by the OMB under control numbers 0694–0088, “Multi-Purpose Application,” which carries a burden hour estimate of 43.8 minutes for a manual or electronic submission. This rule does not alter any information collection requirements; therefore, total burden hours associated with the PRA and OMB control number 0694–0088 are not expected to increase as a result of this rule. You may send comments regarding the collection of information associated with this rule, including suggestions for reducing the burden, to Jasmeet K. Seehra, Office of Management and Budget (OMB), by email to [Jasmeet\\_K\\_Seehra@omb.eop.gov](mailto:Jasmeet_K_Seehra@omb.eop.gov), or by fax to (202) 395–7285.

3. This rule does not contain policies with Federalism implications as that term is defined under E.O. 13132.

4. The Department finds that there is good cause under 5 U.S.C. 553(b)(B) to waive the provisions of the Administrative Procedure Act (APA) requiring prior notice and the opportunity for public comment because they are either unnecessary or contrary to the public interest. The following revisions are non-substantive or are limited to ensure consistency with the intent of the May 13, 2014 interim final rule, and thus prior notice and the opportunity for public comment is unnecessary. Sections 736.2 and 740.20 and ECCNs 9D001, 9D002, 9E001, 9E002 were revised to make corrections to the EAR that resulted from mistakes or other ambiguity in amendatory instructions in past rulemakings. In addition to the revisions above, BIS revises § 744.21, ECCNs 3A611, 9A515, 9D515 and 9E515 to provide guidance on existing interpretations of current EAR provisions and necessary conforming changes, and thus prior notice and the opportunity for public comment is contrary to the public interest. Finally, as contemplated in the May 13 rule, BIS has added an entry to the .y paragraph of ECCN 9A515, which was added as a result of the § 748.3(e) process. For purposes of the APA, there is good cause and it is in the public interest to incorporate this change so the public can benefit from understanding the classification of the item. These revisions are important to get in place as soon as possible so the public will be aware of the correct text and meaning of current EAR provisions.

BIS finds good cause to waive the 30-day delay in effectiveness under 5 U.S.C. 553(d)(3). As mentioned

previously, the revisions made by this rule consist of both technical corrections and clarifications that need to be in place as soon as possible to avoid confusion by the public regarding the intent and meaning of changes to the EAR.

Because a notice of proposed rulemaking and an opportunity for public comment are not required to be given for these amendments by 5 U.S.C. 553, or by any other law, the analytical requirements of the Regulatory Flexibility Act, 5 U.S.C. 601 *et seq.*, are not applicable.

#### **List of Subjects**

##### *15 CFR Part 736*

Exports.

##### *15 CFR Parts 740 and 748*

Administrative practice and procedure, Exports, Reporting and recordkeeping requirements.

##### *15 CFR Part 744*

Exports, Reporting and recordkeeping requirements, Terrorism.

##### *15 CFR Part 774*

Exports, Reporting and recordkeeping requirements.

Accordingly, the Export Administration Regulations (15 CFR parts 730–774) are amended as follows:

#### **PART 736—[AMENDED]**

■ 1. The authority citation for 15 CFR part 736 continues to read as follows:

**Authority:** 50 U.S.C. app. 2401 *et seq.*; 50 U.S.C. 1701 *et seq.*; 22 U.S.C. 2151 note; E.O. 12938, 59 FR 59099, 3 CFR, 1994 Comp., p. 950; E.O. 13020, 61 FR 54079, 3 CFR, 1996 Comp., p. 219; E.O. 13026, 61 FR 58767, 3 CFR, 1996 Comp., p. 228; E.O. 13222, 66 FR 44025, 3 CFR, 2001 Comp., p. 783; E.O. 13338, 69 FR 26751, 3 CFR, 2004 Comp., p. 168; Notice of August 7, 2014, 79 FR 46959 (August 11, 2014); Notice of November 7, 2014, 79 FR 67035 (November 12, 2014); Notice of May 6, 2015, 80 FR 26815 (May 8, 2015).

■ 2. Section 736.2 is amended by revising the heading of paragraph (b)(3)(iii) to read as follows:

##### **§ 736.2 General prohibitions and determination of applicability.**

\* \* \* \* \*

(b) \* \* \*

(3) \* \* \*

(iii) *Country scope of prohibition for 9x515 or “600 series” items.* \* \* \*

\* \* \* \* \*

#### **PART 740—[AMENDED]**

■ 3. The authority citation for 15 CFR part 740 continues to read as follows:

**Authority:** 50 U.S.C. app. 2401 *et seq.*; 50 U.S.C. 1701 *et seq.*; 22 U.S.C. 7201 *et seq.*; E.O. 13026, 61 FR 58767, 3 CFR, 1996 Comp., p. 228; E.O. 13222, 66 FR 44025, 3 CFR, 2001 Comp., p. 783; Notice of August 7, 2014, 79 FR 46959 (August 11, 2014).

■ 4. Section 740.20 is amended by revising the introductory text of paragraph (d)(2) and the bracketed text at the end of the introductory text of paragraph (d)(2) to read as follows:

**§ 740.20 License Exception Strategic Trade Authorization (STA).**

\* \* \* \* \*

(d) \* \* \*

(2) *Prior Consignee Statement.* The requirements in this paragraph (d)(2) apply to each party using License Exception STA to export, reexport or transfer (in-country), including reexporters and transferors of items previously received under License Exception STA. The exporter, reexporter, or transferor must obtain the following statement in writing from its consignee prior to shipping the item and must retain the statement in accordance with part 762 of the EAR. One statement may be used for multiple shipments of the same items between the same parties so long as the party names, the description(s) of the item(s) and the ECCNs are correct. The exporter, reexporter, or transferor must maintain a log or other record (such as documents created in the ordinary course of business) that identifies each shipment made pursuant to this section and the specific consignee statement that is associated with each shipment. Paragraphs (d)(2)(i) through (vi) of this section are required for all transactions. In addition, paragraph (d)(2)(vii) is required for all transactions in “600 series” items and paragraph (viii) of this section is required for transactions in “600 series” items if the consignee is not the government of a country listed in Country Group A:5 (See Supplement No. 1 to part 740 of the EAR). Paragraph (d)(2)(viii) is also required for transactions including 9x515 items.

[INSERT NAME(S) OF CONSIGNEE(S)]:

\* \* \* \* \*

**PART 744—[AMENDED]**

■ 5. The authority citation for 15 CFR part 744 continues to read as follows:

**Authority:** 50 U.S.C. app. 2401 *et seq.*; 50 U.S.C. 1701 *et seq.*; 22 U.S.C. 3201 *et seq.*; 42 U.S.C. 2139a; 22 U.S.C. 7201 *et seq.*; 22 U.S.C. 7210; E.O. 12058, 43 FR 20947, 3 CFR, 1978 Comp., p. 179; E.O. 12851, 58 FR 33181, 3 CFR, 1993 Comp., p. 608; E.O. 12938, 59 FR 59099, 3 CFR, 1994 Comp., p. 950; E.O. 12947, 60 FR 5079, 3 CFR, 1995 Comp., p. 356; E.O. 13026, 61 FR 58767, 3 CFR, 1996

Comp., p. 228; E.O. 13099, 63 FR 45167, 3 CFR, 1998 Comp., p. 208; E.O. 13222, 66 FR 44025, 3 CFR, 2001 Comp., p. 783; E.O. 13224, 66 FR 49079, 3 CFR, 2001 Comp., p. 786; Notice of August 7, 2014, 79 FR 46959 (August 11, 2014); Notice of September 17, 2014, 79 FR 56475 (September 19, 2014); Notice of November 7, 2014, 79 FR 67035 (November 12, 2014); Notice of January 21, 2015, 80 FR 3461 (January 22, 2015).

■ 6. Section 744.21 is amended by revising paragraph (a)(2) to read as follows:

**§ 744.21 Restrictions on certain ‘Military end uses’ in the People’s Republic of China (PRC) or for a ‘Military end use’ or ‘Military end user’ in Russia or Venezuela.**

(a) \* \* \*

(2) *General prohibition.* In addition to the license requirements for 9x515 and “600 series” items specified on the Commerce Control List (CCL), you may not export, reexport, or transfer (in-country) any 9x515 or “600 series” item, including items described in a .y paragraph of a 9x515 or “600 series” ECCN, to the PRC, Russia or Venezuela without a license. The use in, with, or for the International Space Station (ISS) for exports, reexports or transfers within Russia is not within the scope of this paragraph’s general prohibition, including launch to the ISS. (See § 740.11(e)(1) of the EAR for a definition of the ISS).

\* \* \* \* \*

**PART 748—[AMENDED]**

■ 7. The authority citation for 15 CFR part 748 continues to read as follows:

**Authority:** 50 U.S.C. app. 2401 *et seq.*; 50 U.S.C. 1701 *et seq.*; E.O. 13026, 61 FR 58767, 3 CFR, 1996 Comp., p. 228; E.O. 13222, 66 FR 44025, 3 CFR, 2001 Comp., p. 783; Notice of August 7, 2014, 79 FR 46959 (August 11, 2014).

■ 8. Supplement No. 2 to part 748 (Unique Application and Submission Requirements) is amended by revising the introductory text of paragraph (y)(1) and the introductory text of paragraph (y)(2) to read as follows:

**Supplement No. 2 to Part 748—Unique Application and Submission Requirements**

\* \* \* \* \*

(y) \* \* \*

(1) A license application to export a satellite controlled by ECCN 9A515.a for launch in or by a country that is not a member of the North Atlantic Treaty Organization (NATO) or a major non-NATO ally of the United States (as defined in 22 CFR 120.31 and 120.32), must include a statement affirming that at the time of application or prior to

export or reexport the following will be in place:

\* \* \* \* \*

(2) A license application to export a satellite controlled by ECCN 9A515.a for launch in or by a country that is a member of the North Atlantic Treaty Organization (NATO) or that is a major non-NATO ally of the United States (as defined in 22 CFR 120.31 and 120.32), must include a statement affirming that at the time of application or prior to export or reexport the following will be in place:

\* \* \* \* \*

**PART 774—[AMENDED]**

■ 9. The authority citation for 15 CFR part 774 continues to read as follows:

**Authority:** 50 U.S.C. app. 2401 *et seq.*; 50 U.S.C. 1701 *et seq.*; 10 U.S.C. 7420; 10 U.S.C. 7430(e); 22 U.S.C. 287c, 22 U.S.C. 3201 *et seq.*; 22 U.S.C. 6004; 30 U.S.C. 185(s), 185(u); 42 U.S.C. 2139a; 42 U.S.C. 6212; 43 U.S.C. 1354; 15 U.S.C. 1824a; 50 U.S.C. app. 5; 22 U.S.C. 7201 *et seq.*; 22 U.S.C. 7210; E.O. 13026, 61 FR 58767, 3 CFR, 1996 Comp., p. 228; E.O. 13222, 66 FR 44025, 3 CFR, 2001 Comp., p. 783; Notice of August 7, 2014, 79 FR 46959 (August 11, 2014).

■ 10. In Supplement No. 1 to Part 774, Category 3—Electronics, Export Control Classification Number (ECCN) 3A611 is amended by revising Related Controls paragraph (6) in the List of Items Controlled section to read as follows:

**Supplement No. 1 to Part 774—The Commerce Control List**

\* \* \* \* \*

3A611 Military electronics, as follows (see List of Items Controlled).

\* \* \* \* \*

**List of Items Controlled**

*Related Controls:* \* \* \* (6) Electronic items “specially designed” for military application that are not controlled in any USML category but are within the scope of another “600 series” ECCN or a 9x515 ECCN are controlled by that “600 series” ECCN or 9x515 ECCN. For example, electronic components not enumerated on the USML or a “600 series” other than 3A611 that are “specially designed” for a military aircraft controlled by USML Category VIII or ECCN 9A610 are controlled by the catch-all control in ECCN 9A610.x. Electronic components not enumerated on the USML or another “600 series” entry that are “specially designed” for a military vehicle controlled by USML Category VII or ECCN 0A606 are controlled by ECCN 0A606.x. Electronic components not enumerated on the USML that are “specially designed” for a missile controlled by USML Category IV are controlled by ECCN 9A604. \* \* \*

\* \* \* \* \*

■ 11. In Supplement No. 1 to Part 774, Category 9—Aerospace and Propulsion, Export Control Classification Number (ECCN) 9A515 is amended:

- a. By revising the fourth entry in the License Requirements table;
- b. By revising the Related Definitions paragraph in the List of Items Controlled section;
- c. By revising the introductory text of paragraph d. in the Items section;
- d. By revising paragraphs e. introductory text, e.1, and e.2 in the Items section; and
- e. By revising paragraphs x. and y. in the Items section to read as follows.

9A515 “Spacecraft” and related commodities, as follows (see List of Items Controlled).

#### License Requirements

\* \* \* \*

*Control(s)* *Country Chart (see Supp. No. 1 to part 738)*

\* \* \* \* \*

MT applies to micro-circuits in 9A515.d and 9A515.e.2 when “usable in” “missiles” for protecting “missiles” against nuclear effects (e.g. Electro-magnetic Pulse (EMP), X-rays, combined blast and thermal effects).

\* \* \* \* \*

MT Column 1

#### List of Items Controlled

\* \* \* \*

*Related Definitions:* ‘Microcircuit’ means a device in which a number of passive or active elements are considered as indivisibly associated on or within a continuous structure to perform the function of a circuit.

#### Items:

\* \* \* \*

d. Microelectronic circuits (e.g., integrated circuits, microcircuits, MOSFETs) and discrete electronic components rated, certified, or otherwise specified or described as meeting or exceeding all the following characteristics and that are “specially designed” for defense articles, “600 series” items, or items controlled by 9A515:

\* \* \* \*

e. Microelectronic circuits (e.g., integrated circuits, microcircuits, MOSFETs) and discrete electronic components that are rated, certified, or otherwise specified or described as meeting or exceeding the characteristics in either paragraph e.1 or e.2, AND “specially designed” for defense articles controlled by USML Category XV or items controlled by 9A515:

e.1. A total dose  $\geq 1 \times 10^5$  Rads (Si) ( $1 \times 10^3$  Gy(Si)) and  $< 5 \times 10^5$  Rads (Si) ( $5 \times 10^3$  Gy(Si)); and a single event effect (SEE) (i.e., single event latchup (SEL), single event burnout (SEB), or single event gate rupture (SEGR)) immunity to a linear energy transfer (LET)  $\geq 80$  MeV-cm<sup>2</sup>/mg; or

e.2. A total dose  $\geq 5 \times 10^5$  Rads (Si) ( $5 \times 10^3$  Gy (Si)) and not described in 9A515.d.

\* \* \* \*

x. “Parts,” “components,” “accessories” and “attachments” that are “specially designed” for defense articles controlled by USML Category XV or items controlled by 9A515, and that are NOT:

1. Enumerated or controlled in the USML or elsewhere within ECCNs 9A515 or 9A004;
2. Microelectronic circuits and discrete electronic components;
3. Described in ECCNs 7A004 or 7A104;
4. Described in an ECCN containing “space-qualified” as a control criterion (i.e., 3A001.b.1, 3A001.e.4, 3A002.g.1, 3A991.o, 3A992.b.3, 6A002.a.1, 6A002.b.2, 6A002.d.1, 6A004.c and .d, 6A008.j.1, 6A998.b, or 7A003.d.2);
5. Microwave solid state amplifiers and microwave assemblies (refer to ECCN 3A001.b.4 for controls on these items);
6. Travelling wave tube amplifiers (refer to ECCN 3A001.b.8 for controls on these items); or
7. Elsewhere specified in ECCN 9A515.y.

**Note to 9A515.x:** “Parts,” “components,” “accessories,” and “attachments” specified in USML subcategory XV(e) or enumerated in other USML categories are subject to the controls of that paragraph or category.

y. Items that would otherwise be within the scope of ECCN 9A515.x but that have been identified in an interagency-cleared commodity classification (CCATS) pursuant to § 748.3(e) as warranting control in 9A515.y.

- y.1. Discrete electronic components not specified in 9A515.e; and
- y.2. [RESERVED]

■ 12. In Supplement No. 1 to Part 774, Category 9—Aerospace and Propulsion, Export Control Classification Number (ECCN) 9D001 is amended:

- a. By revising the heading;
- b. By revising the first entry in the License Requirements table; and
- b. By revising the Related Controls paragraph in the List of Items Controlled section to read as follows:

9D001 “Software” “specially designed” or modified for the “development” of equipment or “technology” controlled by ECCN 9A001 to 9A004, 9A012, 9A101 (except for items in 9A101.b that are “subject to the ITAR,” see 22 CFR part 121), 9A106.d. or .e, 9A110, or 9A120, 9B (except for ECCNs 9B604, 9B610, 9B619, 9B990, and 9B991), or ECCN 9E003.

#### License Requirements

\* \* \* \*

*Control(s)* *Country Chart (see Supp. No. 1 to part 738)*

NS applies to “software” for equipment controlled by 9A001 to 9A004, 9A012, 9B001 to 9B010, and technology controlled by 9E003..

\* \* \* \*

#### List of Items Controlled

*Related Controls:* “Software” that is “required” for the “development” of items specified in ECCNs 9A005 to 9A011, 9A101.b (except for items that are subject to the EAR), 9A103 to 9A105, 9A106.a, .b, and .c, 9A107 to 9A109, 9A110 (for items that are “specially designed” for use in missile systems and subsystems), and 9A111 to 9A119 is “subject to the ITAR.”

\* \* \* \*

■ 13. In Supplement No. 1 to Part 774, Category 9—Aerospace and Propulsion, Export Control Classification Number (ECCN) 9D002 is amended:

- a. By revising the heading;
- b. By revising the first entry in the License Requirements table; and
- c. By revising the Related Controls paragraph in the List of Items Controlled section to read as follows:

9D002 “Software” “specially designed” or modified for the “production” of equipment controlled by ECCN 9A001 to 9A004, 9A012, 9A101 (except for items in 9A101.b that are “subject to the ITAR,” see 22 CFR part 121), 9A106.d or .e, 9A110, or 9A120, 9B (except for ECCNs 9B604, 9B610, 9B619, 9B990, and 9B991).

#### License Requirements

\* \* \* \*

*Control(s)* *Country Chart (see Supp. No. 1 to part 738)*

NS applies to “software” for equipment controlled by 9A001 to 9A004, 9A012, 9B001 to 9B010.

\* \* \* \*

#### List of Items Controlled

*Related Controls:* “Software” that is “required” for the “production” of items specified in ECCNs 9A005 to 9A011, 9A101.b (except for items that are subject to the EAR), 9A103 to 9A105, 9A106.a, .b, and .c, 9A107 to 9A109, 9A110 (for items that are “specially designed” for use in

missile systems and subsystems), and 9A111 to 9A119 is “subject to the ITAR.”

■ 14. In Supplement No. 1 to Part 774, Category 9—Aerospace and Propulsion, Export Control Classification Number (ECCN) 9D515 is amended:

■ a. By revising the License Requirements table;

■ b. By adding and reserving items paragraphs f. through x. in the Items section; and

■ c. By adding paragraph y. in the Items section to read as follows:

9D515 “Software” “specially designed” for the “development,” “production,” operation, installation, maintenance, repair, overhaul, or refurbishing of “spacecraft” and related commodities, as follows (see List of Items Controlled)

#### License Requirements

\* \* \* \* \*

<i>Control(s)</i>	<i>Country Chart (see Supp. No. 1 to part 738).</i>
NS applies to entire entry except 9D515.y.	NS Column 1
RS applies to entire entry except 9D515.y.	RS Column 1
AT applies to entire entry.	AT Column 1

\* \* \* \* \*

#### List of Items Controlled

\* \* \* \* \*

#### Items:

\* \* \* \* \*

f. through x. [RESERVED]  
y. Specific “software” “specially designed” for the “development,” “production,” operation, or maintenance of commodities enumerated in ECCN 9A515.y.

■ 15. In Supplement No. 1 to Part 774, Category 9—Aerospace and Propulsion, Export Control Classification Number (ECCN) 9E001 is amended:

■ a. By revising the heading;

■ b. By revising the first entry in the License Requirements table;

■ c. By revising Related Controls paragraph (2) in the List of Items Controlled section to read as follows:

9E001 “Technology” according to the General Technology Note for the “development” of equipment or “software”, controlled by 9A001.b, 9A004, 9A012, 9B (except for ECCNs 9B604, 9B610, 9B619, 9B990 and 9B991), or ECCN 9D001 to 9D004, 9D101, or 9D104.

#### License Requirements

\* \* \* \* \*

#### Control(s)

NS applies to “technology” for items controlled by 9A001.b, 9A004, 9A012, 9B001 to 9B010, 9D001 to 9D004 for NS reasons.

\* \* \* \* \*

#### List of Items Controlled

*Related Controls:* \* \* \* \* \* (2)

“Technology” required for the “development” of equipment described in ECCNs 9A005 to 9A011 or “software” described in ECCNs 9D103 and 9D105 is “subject to the ITAR.”

\* \* \* \* \*

■ 16. In Supplement No. 1 to Part 774, Category 9—Aerospace and Propulsion, Export Control Classification Number (ECCN) 9E002 is amended:

■ a. By revising the heading; and

■ b. By revising Related Controls paragraph (3) in the List of Items Controlled section to read as follows:

9E002 “Technology” according to the General Technology Note for the “production” of “equipment” controlled by ECCN 9A001.b, 9A004 or 9B (except for ECCNs 9B117, 9B604, 9B610, 9B619, 9B990, and 9B991).

\* \* \* \* \*

#### List of Items Controlled

*Related Controls:* \* \* \* \* \* (3)

“Technology” that is required for the “production” of equipment described in ECCNs 9A005 to 9A011 is “subject to the ITAR.”

\* \* \* \* \*

■ 17. In Supplement No. 1 to Part 774, Category 9—Aerospace and Propulsion, Export Control Classification Number (ECCN) 9E515 is amended:

■ a. By revising the License Requirements table;

■ b. By adding and reserving paragraphs f. through x. in the Items section; and

■ c. By adding paragraph y. in the items paragraph in the Items section to read as follows:

9E515 “Technology” “required” for the “development,” “production,” operation, installation, repair, overhaul, or refurbishing of “spacecraft” and related commodities, as follows (see List of Items Controlled).

#### License Requirements

\* \* \* \* \*

#### Country Chart (see Supp. No. 1 to part 738).

NS Column 1

#### Control(s)

NS applies to entire entry except 9E515.y.  
MT applies to technology for items in 9A515.d and 9A515.e.2 controlled for MT reasons.

RS applies to entire entry except 9E515.y.

AT applies to entire entry.

\* \* \* \* \*

f. through x. [RESERVED]  
y. Specific “technology” “required” for the “production,” “development,” operation, installation, maintenance, repair, overhaul, or refurbishing of commodities or software enumerated in ECCN 9A515.y or 9D515.y.

Dated: July 2, 2015.

**Kevin J. Wolf,**

*Assistant Secretary of Commerce for Export Administration.*

[FR Doc. 2015–16904 Filed 7–10–15; 8:45 am]

**BILLING CODE 3510–33–P**

## DEPARTMENT OF HOMELAND SECURITY

### Coast Guard

### 33 CFR Part 165

[Docket Number USCG–2015–0188]

RIN 1625–AA00

### Safety Zones; Misery Challenge, Manchester Bay, Manchester, MA

**AGENCY:** Coast Guard, DHS.

**ACTION:** Temporary final rule.

**SUMMARY:** The Coast Guard is establishing a temporary safety zone in Manchester Bay to be enforced during the Misery Challenge marine event, which will involve swimmers, kayakers, and stand-up paddlers. This safety zone will ensure the protection of the event participants, support vessels, and maritime public from the hazards associated with the event. Vessels will be prohibited from entering into, transiting through, mooring, or anchoring within this safety zone during periods of enforcement unless authorized by the Coast Guard Sector Boston Captain of the Port (COTP) or the COTP’s designated representative.

**DATES:** This temporary final rule is effective from 7:30 a.m. on August 1, 2015 to 11:30 a.m. on August 1, 2015.

**ADDRESSES:** Documents mentioned in this preamble are part of docket [USCG–

2015-0188]. To view documents mentioned in this preamble as being available in the docket, go to <http://www.regulations.gov>, type the docket number in the "SEARCH" box and click "SEARCH." Click on Open Docket Folder on the line associated with this rulemaking. You may also visit the Docket Management Facility in Room W12-140 on the ground floor of the Department of Transportation West Building, 1200 New Jersey Avenue SE., Washington, DC 20590, between 9 a.m. and 5 p.m., Monday through Friday, except Federal holidays.

**FOR FURTHER INFORMATION CONTACT:** If you have questions on this rule, contact Mr. Mark Cutter, Coast Guard Sector Boston Waterways Management Division, telephone (617) 223-4000, email [Mark.E.Cutter@uscg.mil](mailto:Mark.E.Cutter@uscg.mil). If you have questions on viewing or submitting material to the docket, call Ms. Cheryl Collins, Program Manager, Docket Operations, telephone (202) 366-9826.

**SUPPLEMENTARY INFORMATION:**

**Table of Acronyms**

DHS Department of Homeland Security  
CFR Code of Federal Regulation  
FR Federal Register  
NPRM Notice of Proposed Rulemaking  
NAD 83 North American Datum of 1983

**A. Regulatory History and Information**

On May 8, 2015 we published a notice of proposed rulemaking (NPRM) entitled Safety Zones; Misery Challenge, Manchester Bay, Manchester, MA in the **Federal Register** (80 FR 26514). We received no comments on the proposed rule. No public meeting was requested, and none was held.

**B. Basis and Purpose**

The legal basis for the proposed rule is 33 U.S.C. 1231; 50 U.S.C. 191; 33 CFR 1.05-1, 6.04-1, 6.04-6, and 160.5; Department of Homeland Security Delegation No. 0170.1, which collectively authorize the Coast Guard to establish regulatory safety zones.

By establishing a temporary safety zone, the Coast Guard will ensure the protection of the event participants, support vessels, and maritime public from the hazards associated with the event.

**C. Discussion of Comments, Changes and the Temporary Final Rule**

The Coast Guard provided a comment period of 30 days and no comments were received. There are no changes to the regulatory text.

**D. Regulatory Analyses**

We developed this rule after considering numerous statutes and

executive orders related to rulemaking. Below we summarize our analyses based on these statutes and executive orders.

**1. Regulatory Planning and Review**

This rule is not a significant regulatory action under section 3(f) of Executive Order 12866, Regulatory Planning and Review, as supplemented by Executive Order 13563, Improving Regulation and Regulatory Review, and does not require an assessment of potential costs and benefits under section 6(a)(3) of Executive Order 12866 or under section 1 of Executive Order 13563. The Office of Management and Budget has not reviewed it under those Orders.

We expect the economic impact of this rule to be minimal. This regulation may have some impact on the public, but that potential impact will likely be minimal for several reasons. First, this safety zone will be in effect for only 4 hours in the morning when vessel traffic is expected to be light. Second, vessels may enter or pass through the safety zone during an enforcement period with the permission of the COTP or the designated representative. Finally, the Coast Guard will provide notification to the public through Broadcast Notice to Mariners well in advance of the event.

**2. Impact on Small Entities**

The Regulatory Flexibility Act of 1980 (RFA), 5 U.S.C. 601-612, as amended, requires federal agencies to consider the potential impact of regulations on small entities during rulemaking. The term "small entities" comprises small businesses, not-for-profit organizations that are independently owned and operated and are not dominant in their fields, and governmental jurisdictions with populations of less than 50,000. The Coast Guard received no comments from the Small Business Administration on this rule. The Coast Guard certifies under 5 U.S.C. 605(b) that this rule will not have a significant economic impact on a substantial number of small entities.

For all of the reasons discussed in the Regulatory Planning and Review section, the Coast Guard certifies under 5 U.S.C. 605(b) that this rule would not have a significant economic impact on a substantial number of small entities.

If you think that your business, organization, or governmental jurisdiction qualifies as a small entity and that this rule would have a significant economic impact on it, please submit a comment (see **ADDRESSES**) explaining why you think it qualifies and how and to what degree this rule would economically affect it.

**3. Assistance for Small Entities**

Under section 213(a) of the Small Business Regulatory Enforcement Fairness Act of 1996 (Pub. L. 104-121), we want to assist small entities in understanding this rule. If the rule would affect your small business, organization, or governmental jurisdiction and you have questions concerning its provisions or options for compliance, please contact the person listed in the **FOR FURTHER INFORMATION CONTACT**, above.

Small businesses may send comments on the actions of Federal employees who enforce, or otherwise determine compliance with, Federal regulations to the Small Business and Agriculture Regulatory Enforcement Ombudsman and the Regional Small Business Regulatory Fairness Boards. The Ombudsman evaluates these actions annually and rates each agency's responsiveness to small business. If you wish to comment on actions by employees of the Coast Guard, call 1-888-REG-FAIR (1-888-734-3247). The Coast Guard will not retaliate against small entities that question or complain about this rule or any policy or action of the Coast Guard.

**4. Collection of Information**

This rule will not call for a new collection of information under the Paperwork Reduction Act of 1995 (44 U.S.C. 3501-3520).

**5. Federalism**

A rule has implications for federalism under Executive Order 13132, Federalism, if it has a substantial direct effect on the States, on the relationship between the national government and the States, or on the distribution of power and responsibilities among the various levels of government. We have analyzed this rule under that Order and determined that this rule does not have implications for federalism.

**6. Protest Activities**

The Coast Guard respects the First Amendment rights of protesters. Protesters are asked to contact the person listed in the **FOR FURTHER INFORMATION CONTACT** section to coordinate protest activities so that your message can be received without jeopardizing the safety or security of people, places or vessels.

**7. Unfunded Mandates Reform Act**

The Unfunded Mandates Reform Act of 1995 (2 U.S.C. 1531-1538) requires Federal agencies to assess the effects of their discretionary regulatory actions. In particular, the Act addresses actions that may result in the expenditure by a

State, local, or tribal government, in the aggregate, or by the private sector of \$100,000,000 (adjusted for inflation) or more in any one year. Though this rule will not result in such an expenditure, we do discuss the effects of this rule elsewhere in this preamble.

#### 8. Taking of Private Property

This rule will not cause a taking of private property or otherwise have taking implications under Executive Order 12630, Governmental Actions and Interference with Constitutionally Protected Property Rights.

#### 9. Civil Justice Reform

This rule meets applicable standards in sections 3(a) and 3(b)(2) of Executive Order 12988, Civil Justice Reform, to minimize litigation, eliminate ambiguity, and reduce burden.

#### 10. Protection of Children From Environmental Health Risks

We have analyzed this rule under Executive Order 13045, Protection of Children from Environmental Health Risks and Safety Risks. This rule is not an economically significant rule and does not create an environmental risk to health or risk to safety that may disproportionately affect children.

#### 11. Indian Tribal Governments

This rule does not have tribal implications under Executive Order 13175, Consultation and Coordination with Indian Tribal Governments, because it does not have a substantial direct effect on one or more Indian tribes, on the relationship between the Federal Government and Indian tribes, or on the distribution of power and responsibilities between the Federal Government and Indian tribes.

#### 12. Energy Effects

This action is not a “significant energy action” under Executive Order 13211, Actions Concerning Regulations That Significantly Affect Energy Supply, Distribution, or Use.

#### 13. Technical Standards

This rule does not use technical standards. Therefore, we did not consider the use of voluntary consensus standards.

#### 14. Environment

We have analyzed this rule under Department of Homeland Security Management Directive 023–01 and Commandant Instruction M16475.ID, which guide the Coast Guard in complying with the National Environmental Policy Act of 1969 (NEPA) (42 U.S.C. 4321–4370f), and

have made a determination that this action is one of a category of actions that do not individually or cumulatively have a significant effect on the human environment. This rule involves the establishment of a temporary safety zone. This rule is categorically excluded from further review under paragraph 34(g) of Figure 2–1 of the Commandant Instruction. A written environmental analysis (EA) checklist and categorical exclusion determination (CED) are available in the docket where indicated under **ADDRESSES**. We seek any comments or information that may lead to the discovery of a significant environmental impact from this rule.

#### List of Subjects in 33 CFR Part 165

Harbors, Marine safety, Navigation (water), Reporting and recordkeeping requirements, Security measures, Waterways.

For the reasons discussed in the preamble, the Coast Guard amends 33 CFR part 165 as follows:

#### PART 165—REGULATED NAVIGATION AREAS AND LIMITED ACCESS AREAS

■ 1. The authority citation for part 165 continues to read as follows:

**Authority:** 33 U.S.C., 1231; 50 U.S.C. 191; 33 CFR 1.05–1, 6.04–1, 6.04–6, and 160.5; Department of Homeland Security Delegation No. 0170.1.

■ 2. Add a new § 165.T01–0188 to read as follows:

#### § 165.T01–0188 Safety Zone—Misery Challenge—Manchester Bay, Manchester, Massachusetts.

(a) *General*. Establish a temporary safety zone:

(1) *Location*. The following area is a safety zone: All navigable waters, from surface to bottom, within one hundred (100) yards from the participants and vessels in support of events in Manchester Bay, Manchester, MA, and enclosed by a line connecting the following points (NAD 83):

Latitude	Longitude
42°34'03" N.	70°46'42" W.; thence to.
42°33'58" N.	70°46'33" W.; thence to
42°32'32" N.	70°47'45" W.; thence to
42°32'58" N.	70°48'40" W.; thence to point of origin.

(2) *Effective and enforcement period*. This rule will be effective on August 1, 2015, from 7:30 a.m. to 11:30 a.m.

(b) *Regulations*. While this safety zone is being enforced, the following regulations, along with those contained in 33 CFR 165.23, apply:

(1) No person or vessel may enter or remain in this safety zone without the

permission of the Captain of the Port (COTP), Coast Guard Sector Boston or the COTP's representative. However, any vessel that is granted permission by the COTP or the COTP's representative must proceed through the area with caution and operate at a speed no faster than that speed necessary to maintain a safe course, unless otherwise required by the Navigation Rules.

(2) Any person or vessel permitted to enter the safety zone shall comply with the directions and orders of the COTP or the COTP's representative. Upon being hailed by a U.S. Coast Guard vessel by siren, radio, flashing lights, or other means, the operator of a vessel within the zone shall proceed as directed. Any person or vessel within the safety zone shall exit the

(3) To obtain permissions required by this regulation, individuals may reach the COTP or a COTP representative via VHF channel 16 or 617–223–5757 (Sector Boston Command Center).

(c) *Penalties*. Those who violate this section are subject to the penalties set forth in 33 U.S.C. 1232 and 50 U.S.C. 1226.

(d) *Notification*. Coast Guard Sector Boston will give notice through the Local Notice to Mariners, Broadcast Notice to Mariners, and to mariners for the purpose of enforcement of this temporary safety zone. Also, Sector Boston will notify the public to the greatest extent possible of any period in which the Coast Guard will suspend enforcement of this safety zone.

(e) *COTP representative*. The COTP's representative may be any Coast Guard commissioned, warrant, or petty officer or any Federal, state, or local law enforcement officer who has been designated by the COTP to act on the COTP's behalf. The COTP's representative may be on a Coast Guard vessel, a Coast Guard Auxiliary vessel, a state or local law enforcement vessel, or a location on shore.

Dated: June 25, 2015.

**C.C. Gelzer,**

*Captain, U.S. Coast Guard, Captain of the Port Boston.*

[FR Doc. 2015–17108 Filed 7–10–15; 8:45 am]

**BILLING CODE 9110–04–P**

**DEPARTMENT OF HOMELAND SECURITY****Coast Guard****33 CFR Part 165****[Docket No. USCG–2015–0616]****Safety Zones; Annual Events in the Captain of the Port Detroit Zone****AGENCY:** Coast Guard, DHS.**ACTION:** Notice of enforcement of regulation.

**SUMMARY:** The Coast Guard will enforce various safety zones for annual marine events in the Captain of the Port Detroit zone from 8 p.m. on July 2, 2015, through 11 p.m. on August 1, 2015. Enforcement of these zones is necessary and intended to ensure safety of life on the navigable waters immediately prior to, during, and immediately after these fireworks events. During the aforementioned period, the Coast Guard will enforce restrictions upon, and control movement of, vessels in a specified area immediately prior to, during, and immediately after fireworks events. During each enforcement period, no person or vessel may enter the respective safety zone without permission of the Captain of the Port.

**DATES:** The regulations in 33 CFR 165.941 will be enforced at various dates and times between 8 p.m. on July 2, 2015, through 11 p.m. on August 1, 2015.

**FOR FURTHER INFORMATION CONTACT:** If you have questions on this document, call or email PO1 Todd Manow, Prevention, U.S. Coast Guard Sector Detroit, 110 Mount Elliot Ave., Detroit MI, 48207; telephone (313)568–9580; email [Todd.M.Manow@uscg.mil](mailto:Todd.M.Manow@uscg.mil).

**SUPPLEMENTARY INFORMATION:** The Coast Guard will enforce the safety zones listed in 33 CFR 165.941, Safety Zones; Annual Events in the Captain of the Port Detroit Zone, at the following dates and times for the following events, which are listed in chronological order by date and time of the event:

(1) *Bay City Fireworks Festival, Bay City, MI.* The safety zone listed in 33 CFR 165.941(a)(53), all waters of the Saginaw River near Bay City, MI, from the Veteran's Memorial Bridge south approximately 1000-yds to the River Walk Pier, will be enforced from 8 p.m. to 10:30 p.m. on July 2, 3, and 4, 2015. In the case of inclement weather on any scheduled day, this safety zone will be enforced from 8 p.m. to 10:30 p.m. on July 5, 2015.

(2) *Caseville Fireworks, Caseville, MI.* The safety zone listed in 33 CFR 165.941(a)(36), all waters of Saginaw

Bay, within a 300-yard radius of the fireworks launch site located at position 43°56.9' N, 083°17.2' W (NAD 83), located off the Caseville break wall, will be enforced from 9:45 p.m. to 10:15 p.m. on July 3, 2015. In the case of inclement weather on July 3, 2015, this safety zone will be enforced from 9:45 p.m. to 10:15 p.m. on July 5, 2015.

(3) *Algonac Pickerel Tournament Fireworks, Algonac, MI.* The safety zone listed in 33 CFR 165.941(a)(37), all waters of the St. Clair River, within a 300-yd radius of the fireworks barge located at position 42°37' N, 082°32' W, North of Russell Island, will be enforced from 10 p.m. to 10:30 p.m. on July 3, 2015. In the case of inclement weather on July 3, 2015, this safety zone will be enforced from 10 p.m. to 10:30 p.m. on July 4, 2015.

(4) *Lexington Independence Festival Fireworks, Lexington, MI.* The safety zone listed in 33 CFR 165.941(a)(42), all waters of Lake Huron within a 300-yd radius of the fireworks barge located 300 yards east of the Lexington break wall, will be enforced from 10 p.m. to 10:30 p.m. on July 3, 2015. In the case of inclement weather on July 3, 2015, this safety zone will be enforced from 10 p.m. to 10:30 p.m. on July 5, 2015.

(5) *Grosse Ile Yacht Club Fireworks, Grosse Ile, MI.* The safety zone listed in 33 CFR 165.941(a)(44), all waters of the Detroit River within a 300-yd radius of the fireworks launch site located at the Grosse Ile Yacht Club at position 42°06' N, 083°09' W (NAD 83), will be enforced from 9:45 p.m. to 10:30 p.m. on July 4, 2015.

(6) *Roostertail Fireworks, Detroit, MI.* The safety zone listed in 33 CFR 165.941(a)(1), all waters of the Detroit River within a 300-ft radius of the fireworks launch site between Detroit and Belle Isle near the Roostertail Restaurant, will be enforced from 10 p.m. to 10:10 p.m. on July 4, 2015.

(7) *Harrisville Fireworks, Harrisville, MI.* The safety zone listed in 33 CFR 165.941(a)(7), a 450-ft radius of the fireworks launch site located at the end of the break wall at the Harrisville harbor, will be enforced from 10 p.m. to 11 p.m. on July 5, 2014.

(8) *City of St. Clair Fireworks, St. Clair, MI.* The safety zone listed in 33 CFR 165.941(a)(31) will be enforced from 10 p.m. to 10:45 p.m. on July 4, 2015. In the case of inclement weather on July 4, 2015, this safety zone will be enforced from 10 p.m. to 10:45 p.m. on July 5, 2015. A regulated area is established to include all waters off the St. Clair River near St. Clair City Park, within a 300-yard radius of the fireworks launch site located at position 42°49' N, 082°29' W (NAD 83).

(9) *Oscoda Township Fireworks, Oscoda, MI.* The safety zone listed in 33 CFR 165.941(a)(32) will be enforced from 10 p.m. to 10:30 p.m. on July 4, 2015. In the case of inclement weather on July 4, 2015, this safety zone will be enforced from 10 p.m. to 10:30 p.m. on July 5, 2015. A regulated area is established to include all waters of Lake Huron, off the DNR Boat Launch near the mouth of the Au Sable River within a 300-yard radius of the fireworks launch site located at position 44°25' N, 083°19' W (NAD 83).

(10) *Port Austin Fireworks, Port Austin, MI.* The safety zone listed in 33 CFR 165.941(a)(33), all waters of Lake Huron within a 300-yd radius of the fireworks launch site, at position 42°03' N, 082°59' W, off of the Port Austin break wall, will be enforced from 10 p.m. to 10:30 p.m. on July 4, 2015. In the case of inclement weather on July 4, 2015, this safety zone will be enforced from 10 p.m. to 10:30 p.m. on July 5, 2015.

(11) *Grosse Pointe Farms Fireworks, Grosse Pointe Farms, MI.* The safety zone listed in 33 CFR 165.941(a)(35), all waters of Lake St. Clair, within a 300-yd radius of the fireworks launch site at position 42°23.85' N, 082°53.25' W, at a private park at Harbor Hill and Lake Shore Rd, will be enforced from 10 p.m. to 10:30 p.m. on July 4, 2015.

(12) *Grosse Pointe Yacht Club 4th of July Fireworks, Grosse Pointe Shores, MI.* The safety zone listed in 33 CFR 165.941(a)(41), all U.S. waters of the Lake St. Clair, within a 300 yard radius of position 42°26' N, 082°52' W, approximately 500 ft east of the Grosse Point Yacht Club, will be enforced from 10 p.m. to 10:30 p.m. on July 4, 2015. In the case of inclement weather on July 4, 2015, this safety zone will be enforced from 10 p.m. to 10:30 p.m. on July 5, 2015.

(13) *Trenton Fireworks, Trenton, MI.* The safety zone listed in 33 CFR 165.941(a)(45), all U.S. waters of the Detroit River, Trenton Channel, within a 300 yard radius of position 42°09' N, 083°10' W, will be enforced from 10 p.m. to 10:30 p.m. on July 4, 2015. In the case of inclement weather on July 4, 2015, this safety zone will be enforced from 10 p.m. to 10:30 p.m. on July 5, 2015.

(14) *Belle Maer Harbor 4th of July Fireworks, Harrison Township, MI.* The safety zone listed in 33 CFR 165.941(a)(46), all U.S. waters of Lake St. Clair, within a 400 yard radius of position 42°36' 30" N, 082°47'40" W, will be enforced from 10 p.m. to 10:30 p.m. on July 4, 2015. In the case of inclement weather on July 4, 2015, this



safety zone will be enforced from 10 p.m. to 10:30 p.m. on July 5, 2015.

(15) *Tawas City 4th of July Fireworks, Tawas City, MI.* The safety zone listed in 33 CFR 165.941(a)(47), all U.S. waters of Lake Huron, within a 300 yard radius of position 44°16' N, 083°30' W, 2000 feet west of the State Dock in East Tawas, will be enforced from 10 p.m. to 11 p.m. on July 4, 2015. In the case of inclement weather on July 4 2015, this safety zone will be enforced from 10 p.m. to 11 p.m. on July 5, 2015.

(16) *Marine City Maritime Festival Fireworks, Marine City, MI.* The safety zone listed in 33 CFR 165.941(a)(13), all waters of the St. Clair River within a 500 foot radius of the fireworks launch site located at position 42°43.15 N, 082°29.2 W, approximately 500 feet offshore from the intersection of Pearl St. and N. Water St., will be enforced from 10 p.m. to 10:30 p.m. on July 31, 2015. In the case of inclement weather on July 31, 2015, this safety zone will be enforced from 10 p.m. to 10:30 p.m. on August 1, 2015.

Under the provisions of 33 CFR 165.23, entry into, transiting, or anchoring within these safety zones during the enforcement period is prohibited unless authorized by the Captain of the Port Detroit or his designated representative. Vessels that wish to transit through the safety zones may request permission from the Captain of the Port Detroit or his designated representative. Requests must be made in advance and approved by the Captain of Port before transits will be authorized. Approvals will be granted on a case by case basis. The Captain of the Port may be contacted via U.S. Coast Guard Sector Detroit on channel 16, VHF-FM. The Coast Guard will give notice to the public via Local Notice to Mariners and VHF radio broadcasts that the regulation is being enforced.

This document is issued under authority of 33 CFR 165.941 and 5 U.S.C. 552 (a). If the Captain of the Port determines that any of these safety zones need not be enforced for the full duration stated in this document, he may suspend such enforcement and notify the public of the suspension via a Broadcast Notice to Mariners.

Dated: June 29, 2015.

**Scott B. Lemasters,**

*Captain, U. S. Coast Guard, Captain of the Port Detroit.*

[FR Doc. 2015-17126 Filed 7-10-15; 8:45 am]

BILLING CODE 9110-04-P

## DEPARTMENT OF HOMELAND SECURITY

### Coast Guard

#### 33 CFR Part 165

[Docket No. USCG-2015-0530]

RIN 1625-AA00

#### Safety Zone; Annual Events Requiring Safety Zones in the Captain of the Port Lake Michigan Zone-Sturgeon Bay Yacht Club Evening on the Bay Fireworks

**AGENCY:** Coast Guard, DHS.

**ACTION:** Notice of enforcement of regulation.

**SUMMARY:** The Coast Guard will enforce the safety zone on the waters of Sturgeon Bay in Sturgeon Bay, WI for the Evening on the Bay Fireworks. This zone will be enforced from 8:30 p.m. until 10:30 p.m. on August 8, 2015. This action is necessary and intended to ensure safety of life on navigable waters immediately prior to, during, and immediately after the fireworks display. During the aforementioned period, the Coast Guard will enforce restrictions upon, and control movement of, vessels in the safety zone. No person or vessel may enter the safety zone while it is being enforced without permission of the Captain of the Port Lake Michigan or a designated representative.

**DATES:** The regulations in 33 CFR 165.929 will be enforced for safety zone (f)(5), Table 165.929, from 8:30 p.m. until 10:30 p.m. on August 8, 2015.

**FOR FURTHER INFORMATION CONTACT:** If you have questions on this document, call or email MST1 Joseph McCollum, Prevention Department, Coast Guard Sector Lake Michigan, Milwaukee, WI at (414) 747-7148, email [joseph.p.mccollum@uscg.mil](mailto:joseph.p.mccollum@uscg.mil).

#### SUPPLEMENTARY INFORMATION:

The Coast Guard will enforce the Sturgeon Bay Yacht Club Evening on the Bay Fireworks safety zone listed as item (f)(5) in Table 165.929 of 33 CFR 165.929. Section 165.929 lists many annual events requiring safety zones in the Captain of the Port Lake Michigan zone. This safety zone will encompass all waters of Sturgeon Bay within the arc of a circle with a 280-foot radius from the fireworks launch site located on a barge in approximate position 44°49.310' N., 087°21.370' W. (NAD 83). This zone will be enforced from 8:30 p.m. until 10:30 p.m. on August 8, 2015.

All vessels must obtain permission from the Captain of the Port Lake Michigan or the on-scene representative to enter, move within, or exit the safety

zone. Requests must be made in advance and approved by the Captain of the Port before transits will be authorized. Approvals will be granted on a case by case basis. Vessels and persons granted permission to enter the safety zone must obey all lawful orders or directions of the Captain of the Port Lake Michigan or a designated representative.

This document is issued under authority of 33 CFR 165.929, Safety Zones; Annual events requiring safety zones in the Captain of the Port Lake Michigan zone, and 5 U.S.C. 552(a). In addition to this publication in the **Federal Register**, the Coast Guard will provide the maritime community with advance notification for the enforcement of this zone via Broadcast Notice to Mariners or Local Notice to Mariners. The Captain of the Port Lake Michigan or an on-scene representative may be contacted via Channel 16, VHF-FM.

Dated: June 16, 2015.

**A.B. Cocanour,**

*Captain, U.S. Coast Guard, Captain of the Port Lake Michigan.*

[FR Doc. 2015-17125 Filed 7-10-15; 8:45 am]

BILLING CODE 9110-04-P

## ENVIRONMENTAL PROTECTION AGENCY

### 40 CFR Part 52

[EPA-HQ-OAR-2012-0943, FRL-9930-25-OAR]

#### Findings of Failure To Submit a Section 110 State Implementation Plan for Interstate Transport for the 2008 National Ambient Air Quality Standards for Ozone

**AGENCY:** Environmental Protection Agency (EPA).

**ACTION:** Final rule.

**SUMMARY:** The Environmental Protection Agency (EPA) is taking final action finding that 24 states have failed to submit infrastructure State Implementation Plans (SIPs) to satisfy certain interstate transport requirements of the Clean Air Act (CAA) with respect to the 2008 8-hour ozone national ambient air quality standard (NAAQS). Specifically, these requirements pertain to significant contribution to nonattainment, or interference with maintenance, of the 2008 8-hour ozone NAAQS in other states. These findings of failure to submit establish a 2-year deadline for the EPA to promulgate a Federal Implementation Plan (FIP) to address the interstate transport SIP requirements pertaining to significant



contribution to nonattainment and interference with maintenance unless, prior to the EPA promulgating a FIP, the state submits, and the EPA approves, a SIP that meets these requirements.

**DATES:** Effective date of this action is August 12, 2015.

**FOR FURTHER INFORMATION CONTACT:** General questions concerning this document should be addressed to Mrs. Gobeail McKinley, Office of Air Quality Planning and Standards, Air Quality Policy Division, Mail Code C539-04, 109 TW Alexander Drive, Research Triangle Park, NC 27711; telephone (919) 541-5246; email: [mckinley.gobeail@epa.gov](mailto:mckinley.gobeail@epa.gov).

**SUPPLEMENTARY INFORMATION:**

**I. General Information**

*A. Notice and Comment Under the Administrative Procedures Act (APA)*

Section 553 of the APA, 5 U.S.C. 553(b)(3)(B), provides that, when an agency for good cause finds that notice and public procedure are impracticable, unnecessary or contrary to the public interest, the agency may issue a rule without providing notice and an opportunity for public comment. The EPA has determined that there is good cause for making this rule final without prior proposal and opportunity for comment because no significant EPA judgment is involved in making a finding of failure to submit SIPs, or elements of SIPs, required by the CAA, where states have made no submissions or incomplete submissions, to meet the requirement. Thus, notice and public procedure are unnecessary. The EPA

finds that this constitutes good cause under 5 U.S.C. 553(b)(3)(B).

*B. How can I get copies of this document and other related information?*

The EPA has established a docket for this action under Docket ID No. EPA-HQ-OAR-2012-0943. Publicly available docket materials are available either electronically through <https://www.regulations.gov> or in hard copy at the EPA Docket Center, EPA/DC, William Jefferson Clinton West Building, Room 3334, 1301 Constitution Avenue NW., Washington, DC. The Public Reading Room is open from 8:30 a.m. to 4:30 p.m., Monday through Friday, excluding legal holidays. The telephone number for the Public Reading Room is (202) 566-1744 and the telephone number for the Office of Air and Radiation Docket and Information Center is (202) 566-1742.

*C. How is the preamble organized?*

Table of Contents

I. General Information

- A. Notice and Comment Under the Administrative Procedures Act (APA)
- B. How can I get copies of this document and other related information?
- C. How is the preamble organized?
- D. Where do I go if I have specific state questions?

II. Background and Overview

- A. Interstate Transport SIPs
- B. Background on 2008 Ozone NAAQS and Related Rulemakings
- C. Mandatory Duty Suit for the EPA's Failure to Make Findings of Failure to Submit for States that Did Not Submit SIPs

D. Further Background Specific to North Carolina SIP Status

III. Findings of Failure to Submit for States That Failed to Make a Good Neighbor SIP Submission for the 2008 Ozone NAAQS

IV. Environmental Justice Considerations

V. Statutory and Executive Order Reviews

- A. Executive Order 12866: Regulatory Planning and Review and Executive Order 13563: Improving Regulation and Regulatory Review
- B. Paperwork Reduction Act
- C. Regulatory Flexibility Act (RFA)
- D. Unfunded Mandates Reform Act of 1995 (UMRA)
- E. Executive Order 13132: Federalism
- F. Executive Order 13175: Consultation and Coordination with Indian Tribal Governments
- G. Executive Order 13045: Protection of Children from Environmental Health and Safety Risks
- H. Executive Order 13211: Actions That Significantly Affect Energy Supply, Distribution or Use
- I. National Technology Transfer and Advancement Act
- J. Executive Order 12898: Federal Actions to Address Environmental Justice in Minority and Low Income Populations
- K. Congressional Review Act
- L. Judicial Review

*D. Where do I go if I have specific state questions?*

The table below lists the states that failed to make an interstate transport SIP submittal addressing CAA section 110(a)(2)(D)(i)(I) requirements for the 2008 ozone NAAQS. For questions related to specific states mentioned in this document, please contact the appropriate EPA Regional Office:

Regional offices	States
EPA Region 1: Anne Arnold, Manager, Air Quality Planning Unit (OEP05-02), EPA Region I, 5 Post Office Square, Suite 100, Boston, MA 02109-3912. (617) 918-1047.	Maine, Massachusetts, New Hampshire, Vermont
EPA Region 3: Cristina Fernandez, Associate Director, Office of Air Program Planning (3AP30), Air Protection Division, EPA Region III, 1650 Arch Street, Philadelphia, PA 19103-2187. (215) 814-2178.	Pennsylvania, Virginia, West Virginia
EPA Region 4: R. Scott Davis, Chief, Air Planning & Implementation Branch, EPA Region IV, Sam Nunn Atlanta Federal Center, 61 Forsyth Street SW, 12th Floor, Atlanta, GA 30303. (404) 562-9127.	Alabama, Florida, Georgia, Mississippi, North Carolina, South Carolina, Tennessee
EPA Region 5: John Mooney, Air Program Branch Manager, Air Programs Branch, EPA Region 5, 77 West Jackson Street, Chicago, IL 60604-3590. (312) 886-6043.	Illinois, Michigan, Minnesota
EPA Region 6: Guy Donaldson, Chief, Air Planning Section, EPA Region VI, 1445 Ross Avenue, Dallas, TX 75202-2733. (214) 665-7242.	Arkansas, New Mexico, Oklahoma
EPA Region 7: Joshua A. Tapp, Branch Chief, Air Planning and Development Branch, EPA Region VII, 11201 Renner Blvd., Lenexa, KS 66219. (913) 551-7606.	Iowa, Kansas, Missouri
EPA Region 9: Matt Lakin, Air Program Manager, Air Planning Office, EPA Region 9, 75 Hawthorne Street, San Francisco, CA 94105. (415) 972-3851.	California

## II. Background and Overview

### A. Interstate Transport SIPs

The CAA section 110(a) imposes an obligation upon states to submit SIPs that provide for the implementation, maintenance and enforcement of a new or revised NAAQS within 3 years following the promulgation of that NAAQS. Section 110(a)(2) lists specific requirements that states must meet in these SIP submissions, as applicable. The EPA refers to this type of SIP submission as the “infrastructure” SIP because it ensures that states can implement, maintain and enforce the air standards. Within these requirements, section 110(a)(2)(D)(i) contains requirements to address interstate transport of NAAQS pollutants. A SIP revision submitted for this sub-section is referred to as an “interstate transport SIP.” In turn, section 110(a)(2)(D)(i)(I) requires that such a plan contain adequate provisions to prohibit emissions from the state that will contribute significantly to nonattainment of the NAAQS in any other state (“prong 1”) or interfere with maintenance of the NAAQS in any other state (“prong 2”). Interstate transport prongs 1 and 2, also called the “good neighbor” provisions, are the requirements relevant to this findings document.

Pursuant to CAA section 110(k)(1)(B), the EPA must determine no later than 6 months after the date by which a state is required to submit a SIP whether a state has made a submission that meets the minimum completeness criteria established per section 110(k)(1)(A). The EPA refers to the determination that a state has not submitted a SIP submission that meets the minimum completeness criteria as a “finding of failure to submit.” If the EPA finds a state has failed to submit a SIP to meet its statutory obligation to address 110(a)(2)(D)(i)(I), pursuant to section 110(c)(1) the EPA has not only the authority, but the obligation, to promulgate a FIP within 2 years to address the CAA requirement. This finding therefore starts a 2-year clock for promulgation by the EPA of a FIP, in accordance with CAA section 110(c)(1), unless prior to such promulgation the state submits, and the EPA approves, a submittal from the state to meet the requirements of CAA section 110(a)(2)(D)(i)(I) for the 2008 8-hour ozone NAAQS. The EPA will work with states subject to these findings of failure to submit and provide assistance as necessary to help them develop approvable submittals in a timely manner. The EPA notes this action does not start a mandatory sanctions clock

pursuant to CAA section 179 because this finding of failure to submit does not pertain to a part D plan for nonattainment areas required under CAA section 110(a)(2)(I) or a SIP call pursuant to CAA section 110(k)(5).

### B. Background on 2008 Ozone NAAQS and Related Rulemakings

On March 12, 2008, the EPA strengthened the NAAQS for ozone.<sup>1</sup> The EPA revised the previous 8-hour primary ozone standard of 0.08 parts per millions (ppm) to 0.075 ppm. The EPA also revised the secondary 8-hour standard to the level of 0.075 ppm making it identical to the revised primary standard. Infrastructure SIPs addressing the revised standard were due March 12, 2011. In September 2009, the EPA announced it would reconsider the 2008 8-hour ozone NAAQS.<sup>2</sup> To reduce the workload for states during the interim period of reconsideration, the EPA also announced its intention to propose staying implementation of the 2008 ozone NAAQS for a number of the requirements. Then, on January 6, 2010, as part of its voluntary rulemaking on reconsideration, the EPA proposed to revise the 2008 NAAQS for ozone from 75 ppb to a level within the range of 60 to 70 ppb. See 75 FR 2938 (January 19, 2010). The EPA indicated its intent to issue final standards, based upon the reconsideration, by summer 2011.

On July 6, 2011, the EPA finalized the Cross-State Air Pollution Rule (CSAPR), 76 FR 48208, in response to the remand by the United States Court of Appeals for the District of Columbia Circuit (DC Circuit) of the EPA’s earlier rule, the Clean Air Interstate Rule (CAIR).<sup>3</sup> See *North Carolina v. EPA*, 531 F.3d 896 (D.C. Cir. 2008), *modified by* 550 F.3d 1176 (remanding CAIR). CSAPR addresses ozone transport with respect to the 1997 ozone NAAQS, but does not address the 2008 ozone standard, because the 2008 ozone NAAQS was under reconsideration by the EPA during the analytical work for CSAPR.

On September 2, 2011, consistent with the direction of the President, the Administrator of the Office of Information and Regulatory Affairs of the Office of Management and Budget returned the draft final 2008 ozone

NAAQS rule to the EPA for further consideration.<sup>4</sup> In view of this direction and the timing of the EPA’s ongoing periodic review of the ozone NAAQS required under CAA section 109 (as announced on September 29, 2008), the EPA decided to coordinate further proceedings on its voluntary rulemaking on reconsideration of the 2008 ozone NAAQS with that ongoing periodic review, by deferring the completion of its voluntary rulemaking on reconsideration until it completed its statutorily-required periodic review.<sup>5</sup> During this time period for renewed implementation of the 2008 ozone standard, however, a number of legal developments pertaining to the EPA’s promulgation of CSAPR created uncertainty over the EPA’s statutory interpretation and implementation of the “good neighbor” requirement as to that standard.

On August 21, 2012, the DC Circuit issued a decision in *EME Homer City Generation, L.P. v. EPA* addressing several legal challenges to CSAPR and holding, among other things, that states had no obligation to submit good neighbor SIPs until the EPA had first quantified each state’s good neighbor obligation.<sup>6</sup> Accordingly, under that decision the submission deadline for good neighbor SIPs under the CAA would not necessarily be tied to the promulgation of a new or revised NAAQS. While the EPA disagreed with this interpretation of the statute and sought review first with the DC Circuit *en banc* and then with the United States Supreme Court, the EPA complied with the DC Circuit’s ruling during the pendency of its appeal. In particular, the EPA indicated that consistent with the DC Circuit’s opinion, it would not at that time issue findings that states had failed to submit SIPs addressing the good neighbor requirements in CAA section 110(a)(2)(D)(i)(I).<sup>7</sup> Moreover, when the EPA made findings that states had failed to submit infrastructure SIPs

<sup>4</sup> See Policy Assessment for the Review of the Ozone National Ambient Air Quality Standards, August 2014, pages 1–9. The Policy assessment is available at <http://www.epa.gov/ttn/naaqs/standards/ozone/data/20140829pa.pdf>.

<sup>5</sup> *Id.*

<sup>6</sup> *EME Homer City Generation, L.P. v. EPA*, 696 F.3d 7, 31 (D.C. Cir. 2012).

<sup>7</sup> See, e.g., Memorandum from the Office of Air and Radiation former Assistant Administrator Gina McCarthy to the EPA Regions, “Next Steps for Pending Redesignation Requests and State Implementation Plan Actions Affected by the Recent Court Decision Vacating the 2011 Cross-State Air Pollution Rule,” November 19, 2012; 78 FR 65559 (November 1, 2013) (final action on Florida infrastructure SIP submission for 2008 8-hour ozone NAAQS); and 78 FR 14450 (March 6, 2013) (final action on Tennessee infrastructure SIP submissions for 2008 8-hour ozone NAAQS).

<sup>1</sup> See 73 FR 16436 (March 27, 2008) (National Ambient Air Quality Standards for Ozone, Final Rule).

<sup>2</sup> The EPA’s Fact Sheet, *EPA to reconsider Ozone Pollution Standards*, is available at [http://www.epa.gov/groundlevelozone/pdfs/O3\\_Reconsideration\\_FACT%20SHEET\\_091609.pdf](http://www.epa.gov/groundlevelozone/pdfs/O3_Reconsideration_FACT%20SHEET_091609.pdf).

<sup>3</sup> See 70 FR 25162 (May 12, 2005) (Rule To Reduce Interstate Transport of Fine Particulate Matter and Ozone (Clean Air Interstate Rule); Revisions to the Acid Rain Program; Revisions to the NO<sub>x</sub> SIP Call, Final Rule).

addressing the 2008 ozone NAAQS, the EPA explained that it was not issuing findings as to the good neighbor requirements in accordance with the court's holding in *EME Homer City Generation*. 78 FR 2882, 2884 (January 15, 2013) (Findings of Failure To Submit a Complete State Implementation Plan for Section 110(a) Pertaining to the 2008 Ozone National Ambient Air Quality Standard).

While the DC Circuit declined to consider the EPA's appeal *en banc*,<sup>8</sup> on January 23, 2013, the Supreme Court granted the EPA's petition for certiorari.<sup>9</sup> During 2013 and early 2014, as the EPA awaited a decision from the Supreme Court, the EPA initiated efforts and technical analyses aimed at identifying and quantifying state good neighbor obligations for the 2008 ozone NAAQS. As part of this effort, the EPA solicited stakeholder input and also provided states with, and requested input on, emissions inventories for 2011 and emissions inventory projections for 2018.

On April 29, 2014, the Supreme Court issued a decision reversing the DC Circuit's *EME Homer City* opinion on CSAPR and held, among other things, that under the plain language of the CAA, states must submit SIPs addressing the good neighbor requirement in CAA section 110(a)(2)(D)(i)(I) within 3 years of promulgation of a new or revised NAAQS, regardless of whether the EPA first provides guidance, technical data or rulemaking to quantify the state's obligation. Thus, the Supreme Court affirmed that states have an obligation in the first instance to address the good neighbor provision after promulgation of a new or revised NAAQS, a holding that also applies to states' obligation to address interstate transport for CAA section 110(a)(2)(D)(i)(I) for the 2008 ozone NAAQS.

#### *C. Mandatory Duty Suit for the EPA's Failure to Make Findings of Failure To Submit for States That Did Not Submit SIPs*

On March 15, 2013, several states and the District of Columbia filed a complaint challenging the EPA's assertion in the January 15, 2013 findings of failure to submit for the 2008 ozone NAAQS infrastructure SIPs that it did not have the authority to issue findings as to the good neighbor

provision.<sup>10</sup> After the Supreme Court issued its decision reversing the DC Circuit's vacatur of CSAPR, the EPA requested partial vacatur and remand of the January 15, 2013 portion of the findings that pertained to the good neighbor provision. On August 1, 2014, the court granted the EPA's request, vacating the EPA's decision not to make findings of failure to submit with respect to the good neighbor provision and remanding the findings to the EPA for further consideration.

Shortly thereafter, Sierra Club and WildEarth Guardians filed two separate cases alleging that the EPA had not fulfilled its mandatory duty to make findings of failure to submit good neighbor SIPs addressing interstate transport in CAA section 110(a)(2)(D)(i)(I) with respect to the 2008 ozone NAAQS. In the first case, Sierra Club filed a complaint in the U.S. District Court for the Northern District of California (Northern District of California) on July 15, 2014, seeking an order to compel the EPA to make findings of failure to submit with respect to the 2008 ozone NAAQS good neighbor SIP for the state of Tennessee.<sup>11</sup> On November 18, 2014, Sierra Club and WildEarth Guardians filed another complaint in the same court seeking an order to compel the EPA to make findings of failure to submit with respect to the 2008 ozone NAAQS good neighbor SIPs for the following states: Arkansas, California, Connecticut, Georgia, Iowa, Illinois, Kansas, Massachusetts, Maine, Michigan, Minnesota, Missouri, New Hampshire, New Mexico, Oklahoma, Pennsylvania, Rhode Island, South Carolina, Virginia, Washington and West Virginia.<sup>12</sup> On January 15, 2015, the plaintiffs amended their complaint in the second case to add Alabama, Florida, North Carolina and Mississippi. On May 15, 2015, the court entered judgment ordering the EPA to, by June 30, 2015, sign a notice issuing its findings of failure to submit with respect to the 2008 ozone NAAQS interstate transport SIPs for the 26 states addressed in both cases.<sup>13</sup>

The EPA recognizes the practical and legal uncertainty that has surrounded

the 2008 ozone NAAQS and the proper interpretation of the good neighbor provision. States were given the impression that if the NAAQS were revised as a result of the reconsideration, the 3-year SIP deadline would reset. The EPA also recognizes that this uncertainty may have influenced states' efforts to develop SIPs to address CAA section 110(a)(2)(D)(i)(I) requirements for the 2008 ozone NAAQS. Given that the NAAQS have not been revised and the United States Supreme Court overturned the DC Circuit opinion on CSAPR, March 12, 2011, remains the legally applicable deadline for good neighbor SIPs for the 2008 8-hour ozone NAAQS.

In response to the orders from the DC Circuit and the Northern District of California, the EPA is taking this action for all states that have failed to submit complete SIPs addressing CAA section 110(a)(2)(D)(i)(I) for the 2008 ozone NAAQS. To date, 26 states, the District of Columbia and Puerto Rico have submitted complete SIPs addressing CAA section 110(a)(2)(D)(i)(I) for the 2008 ozone NAAQS. Three states specifically identified in the Northern District of California's order have made complete submissions as of the date of this document. Therefore, the EPA is issuing national findings of failure to submit good neighbor SIPs addressing the requirements of CAA sections 110(a)(2)(D)(i)(I) as to the 2008 ozone NAAQS, addressing all states that have not made complete submissions as to the date of this document.

#### *D. Further Background Specific to North Carolina SIP Status*

On November 12, 2012, the state of North Carolina submitted a SIP revision to the EPA addressing, among other things, the good neighbor provision of CAA section 110(a)(2)(D)(i)(I) for the 2008 ozone NAAQS. The submission was determined to be complete by a letter dated November 15, 2012. On July 15, 2014, Sierra Club filed a complaint in the Northern District of California alleging that the EPA had failed to take final action on the North Carolina SIP submission, including the interstate transport provisions, by the statutory deadline and asked the court to order the EPA to take such final action by a date certain.<sup>14</sup> Subsequently, on September 3, 2014, the state of North Carolina submitted a letter withdrawing the good neighbor provision of the November 12, 2012, infrastructure SIP submission addressing CAA section

<sup>8</sup> *EME Homer City Generation, L.P. v. EPA*, No. 11-1302 (D.C. Cir. January 24, 2013), ECF No. 1417012 (denying the EPA's motion for rehearing *en banc*).

<sup>9</sup> *EPA v. EME Homer City Generation, L.P.*, 133 S. Ct. 2857 (2013) (granting the EPA's and other parties' petitions for certiorari).

<sup>10</sup> *Maryland v. EPA*, Case No. 13-1070 (D.C. Cir., filed March 15, 2013).

<sup>11</sup> Complaint, *Sierra Club vs. McCarthy*, Case 4:14-cv-3198-JSW (N.D. Cal. July 15, 2014). The complaint also included a separate claim regarding the EPA's alleged failure to take final action to approve or disapprove infrastructure SIPs as to a number of states.

<sup>12</sup> Complaint, *Sierra Club vs. McCarthy*, Case 4:14-cv-05091-YGR (N.D. Cal. November 18, 2014).

<sup>13</sup> See Judgment, *Sierra Club v. McCarthy*, Case 4:14-cv-05091-YGR (N.D. Cal. May 15, 2015).

<sup>14</sup> Complaint, *Sierra Club v. McCarthy*, Case 4:14-cv-03198-JSW, (N.D. Cal. July 15, 2014).

110(a)(2)(D)(i)(I).<sup>15</sup> In reliance on the withdrawal, Sierra Club filed an amended complaint on December 12, 2014, that revised its claim to remove the allegation that the EPA had failed to act the good neighbor provision of North Carolina's SIP.<sup>16</sup> The parties to the litigation subsequently entered into a consent decree that settled the remaining claim as to North Carolina.<sup>17</sup> In further reliance on the withdrawal, Sierra Club and WildEarth Guardians also filed an amended complaint in case number 4:14-cv-05091, discussed above, alleging that the EPA had failed to make a finding of failure to submit as to North Carolina's good neighbor SIP for the 2008 ozone NAAQS.<sup>18</sup>

On June 26, 2015, North Carolina submitted a letter indicating that it wished to "rescind" its September 3, 2014 withdrawal of its good neighbor SIP to address the 2008 ozone NAAQS.<sup>19</sup> The letter explained that the November 12, 2012 submittal did not include modeling and that preliminary air quality modeling released by the EPA on January 22, 2015, supported its interstate transport SIP. The letter also explained that, based on this modeling, the state concluded "it has met its obligations under CAA section 110(a)(1) and (2)(D) related to interstate transport . . . and therefore, does not expect" to be subject to this document finding certain states' failure to submit interstate transport SIPs for the 2008 ozone NAAQS.

On June 30, 2015, the EPA responded to North Carolina's June 26, 2015 letter.<sup>20</sup> Because the EPA determined that it was not appropriate to rescind North Carolina's prior withdrawal of its November 12, 2012 SIP submission, and

because the June 25, 2015, letter relies on new information and analysis to support the state's conclusion regarding its statutory interstate transport obligations that was not contained in its November 12, 2012, SIP submission (*i.e.*, the preliminary air quality modeling released by the EPA on January 22, 2015), the EPA views the June 26, 2015 letter as a new SIP submission. Accordingly, the EPA has evaluated the June 26, 2015 letter for completeness as a SIP revision pursuant to the criteria in 40 CFR part 51, appendix V, and concluded that the June 26, 2015, letter is an incomplete SIP submission. The incompleteness letter notes that North Carolina's June 26, 2015, letter contains new information and analysis upon which North Carolina now relies to support its conclusions regarding the state's statutory obligations to address interstate transport, in particular the EPA's air quality modeling, and that neither the new information nor North Carolina's conclusions relying upon that information were subject to public notice and comment per criteria 2.1(f)–(h) of appendix V. Accordingly, the EPA is finding in this document that North Carolina has failed to submit a complete SIP revision addressing CAA section 110(a)(2)(D)(i)(I) as to the 2008 ozone NAAQS.

### III. Findings of Failure To Submit for States That Failed To Make a Good Neighbor SIP Submission for the 2008 Ozone NAAQS

Three states (*i.e.*, Connecticut, Rhode Island and Washington) addressed by the Northern District of California's order have made complete SIP submittals addressing the good neighbor provision for the 2008 ozone NAAQS. Hawaii was not addressed by the Northern District of California's order and the state has submitted a complete SIP submittal addressing the good neighbor provision for the 2008 ozone NAAQS. The EPA is making findings of failure to submit for 24 states. The EPA is finding that the following states have not made a complete good neighbor SIP submittal to meet the requirements of CAA section 110(a)(2)(D)(i)(I): Alabama, Arkansas, California, Florida, Georgia, Iowa, Illinois, Kansas, Massachusetts, Maine, Michigan, Minnesota, Mississippi, Missouri, New Hampshire, New Mexico, North Carolina, Oklahoma, Pennsylvania, South Carolina, Tennessee, Vermont,<sup>21</sup> Virginia and West Virginia.

<sup>21</sup> We are making a finding for the state of Vermont even though the state was not addressed by the Northern District of California's order. In

### IV. Environmental Justice Considerations

This document is making a procedural finding that certain states have failed to submit a SIP to address CAA section 110(a)(2)(D)(i)(I) for the 2008 ozone NAAQS. The EPA did not conduct an environmental analysis for this rule because this rule would not directly affect the air emissions of particular sources. Because this rule will not directly affect the air emissions of particular sources, it does not affect the level of protection provided to human health or the environment. Therefore, this action will not have potential disproportionately high and adverse human health or environmental effects on minority, low-income or indigenous populations.

### V. Statutory and Executive Order Reviews

#### A. Executive Order 12866: Regulatory Planning and Review and Executive Order 13563: Improving Regulation and Regulatory Review

This action is not a significant regulatory action and was therefore not submitted to the Office of Management and Budget (OMB) for review.

#### B. Paperwork Reduction Act (PRA)

This action does not impose an information collection burden under the provisions of the Paperwork Reduction Act, 44 U.S.C. 3501 *et seq.* This final rule does not establish any new information collection requirement apart from what is already required by law.

#### C. Regulatory Flexibility Act (RFA)

This action is not subject to the RFA. The RFA applies only to rules subject to notice and comment rulemaking requirements under the Administrative Procedure Act (APA), 5 U.S.C. 553, or any other statute. This rule is not subject to notice and comment requirements because the agency has invoked the APA "good cause" exemption under 5 U.S.C. 553(b).

#### D. Unfunded Mandates Reform Act of 1995 (UMRA)

This action does not contain any unfunded mandate as described in UMRA, 2 U.S.C. 1531–1538, and does not significantly or uniquely affect small governments. The action implements mandates specifically and explicitly set forth in the CAA under section 110(a) without the exercise of any policy discretion by the EPA.

fairness and to fulfill its statutory obligations, the EPA is addressing all states that have not made a submittal in this findings document.

<sup>15</sup> See, Letter from Sheila Holman, Director, Division of Air Quality, NCDENR, to Heather McTeer Toney, Regional Administrator, USEPA Region 4, "Withdrawal of Section 110(a)(2)(D)(i)(I) from North Carolina's 2008 Ozone Infrastructure State Implementation Plan Submittal" (September 3, 2014).

<sup>16</sup> First Amended Complaint, *Sierra Club v. McCarthy*, Case 4:14-cv-03198-JSW, (N.D. Cal. December 12, 2014).

<sup>17</sup> See Judgment, *Sierra Club v. McCarthy*, Case 4:14-cv-03198-JSW, (N.D. Cal. May 15, 2015).

<sup>18</sup> See Amended Complaint, *Sierra Club v. McCarthy*, Case No. 4:14-cv-05091 (N.D. Cal. Jan. 15, 2015).

<sup>19</sup> See Letter from Sheila C. Holman, NCDENR, to Heather McTeer Toney, USEPA Region 4, "Recession [sic] of North Carolina's September 3, 2014, Withdrawal of 2008 Ozone Infrastructure State Implementation Plan Certification Pertaining to Interstate Transport (Section 110(a)(2)(D)(i)(I))" (June 26, 2015).

<sup>20</sup> See Letter from Beverly H. Banister, USEPA Region 4, to Sheila Holman, NCDENR, "Response to North Carolina's June 26, 2015 Letter Seeking to Rescind the September 3, 2014 Withdrawal of the 2008 Ozone Infrastructure State Implementation Plan Certification Regarding Interstate Transport" (June 30, 2015).

*E. Executive Order 13132: Federalism*

This action does not have federalism implications. It will not have substantial direct effects on the states, on the relationship between the national government and the states, or on the distribution of power and responsibilities among the various levels of government.

*F. Executive Order 13175: Consultation and Coordination With Indian Tribal Governments*

This action does not have tribal implications as specified in Executive Order 13175. This rule responds to the requirement in the CAA for states to submit SIPs under section 110(a) to address CAA section 110(a)(2)(D)(i)(I) for the 2008 ozone NAAQS. No tribe is subject to the requirement to submit an implementation plan under section 110(a) within 3 years of promulgation of a new or revised NAAQS. Thus, Executive Order 13175 does not apply to this action.

*G. Executive Order 13045: Protection of Children From Environmental Health and Safety Risks*

The EPA interprets Executive Order 13045 as applying only to those regulatory actions that concern environmental health or safety risks that the EPA has reason to believe may disproportionately affect children, per the definition of “covered regulatory action” in section 2–202 of the Executive Order. This action is not subject to Executive Order 13045 because it does not concern an environmental health risk or safety risk.

*H. Executive Order 13211: Actions That Significantly Affect Energy Supply, Distribution or Use*

This action is not subject to Executive Order 13211, because it is not a significant regulatory action under Executive Order 12866.

*I. National Technology Transfer and Advancement Act*

This rulemaking does not involve technical standards.

*J. Executive Order 12898: Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations*

The EPA believes the human health or environmental risk addressed by this action will not have potential disproportionately high and adverse human health or environmental effects on minority, low-income or indigenous populations because it does not affect the level of protection provided to human health or the environment. The

EPA’s evaluation of environmental justice considerations is contained in section IV of this document.

*K. Congressional Review Act (CRA)*

This action is subject to the CRA, and the EPA will submit a rule report to each House of the Congress and to the Comptroller General of the United States. This action is not a “major rule” as defined by 5 U.S.C. 804(2).

*L. Judicial Review*

Section 307(b)(1) of the CAA indicates which federal Courts of Appeal have venue for petitions of review of final agency actions by the EPA under the CAA. This section provides, in part, that petitions for review must be filed in the Court of Appeals for the District of Columbia Circuit (i) when the agency action consists of “nationally applicable regulations promulgated, or final actions taken, by the Administrator,” or (ii) when such action is locally or regionally applicable, if “such action is based on a determination of nationwide scope or effect and if in taking such action the Administrator finds and publishes that such action is based on such a determination.”

The EPA has determined that this final rule consisting of findings of failure to submit certain of the required good neighbor SIP provisions is “nationally applicable” within the meaning of section 307(b)(1). This rule affects 24 states across the country that are located in seven of the ten EPA Regions, 10 different federal circuits, and multiple time zones.

This determination is appropriate because, in the 1977 CAA Amendments that revised CAA section 307(b)(1), Congress noted that the Administrator’s determination that an action is of “nationwide scope or effect” would be appropriate for any action that has “scope or effect beyond a single judicial circuit.” H.R. Rep. No. 95–294 at 323–324, reprinted in 1977 U.S.C.C.A.N. 1402–03. Here, the scope and effect of this action extends to the 10 judicial circuits that include the states across the country affected by this action. In these circumstances, section 307(b)(1) and its legislative history authorize the Administrator to find the rule to be of “nationwide scope or effect” and thus to indicate that venue for challenges lies in the DC Circuit. Accordingly, the EPA is determining that this is a rule of nationwide scope or effect. Under section 307(b)(1) of the CAA, petitions for judicial review of this action must be filed in the United States Court of Appeals for the District of Columbia within 60 days from the date this final action is published in the **Federal**

**Register.** Filing a petition for review by the Administrator of this final action does not affect the finality of the action for the purposes of judicial review nor does it extend the time within which a petition for judicial review must be filed, and shall not postpone the effectiveness of such rule or action.

**List of Subjects in 40 CFR Part 52**

Environmental protection, Air pollution control, Incorporation by reference, Intergovernmental relations, Ozone, Reporting and recordkeeping requirements.

Dated: June 30, 2015.

**Janet G. McCabe,**

*Acting Assistant Administrator.*

[FR Doc. 2015–16922 Filed 7–10–15; 8:45 am]

**BILLING CODE 6560–50–P**

**ENVIRONMENTAL PROTECTION AGENCY****40 CFR Part 52**

**[EPA–R09–OAR–2014–0841; FRL–9929–60–Region 9]**

**Revisions to the California State Implementation Plan, South Coast Air Quality Management District**

**AGENCY:** Environmental Protection Agency (EPA).

**ACTION:** Final rule.

**SUMMARY:** The Environmental Protection Agency (EPA) is taking action to approve a revision to the South Coast Air Quality Management District (SCAQMD) portion of the California State Implementation Plan (SIP). This revision concerns volatile organic compound (VOC) emissions from Large Confined Animal Facilities. We are approving a local rule to regulate these emission sources under the Clean Air Act (CAA or the Act).

**DATES:** This rule will be effective on August 12, 2015.

**ADDRESSES:** The EPA has established docket number EPA–R09–OAR–2014–0841 for this action. Generally, documents in the docket for this action are available electronically at <http://www.regulations.gov> or in hard copy at EPA Region IX, 75 Hawthorne Street, San Francisco, California 94105–3901. While all documents in the docket are listed at <http://www.regulations.gov>, some information may be publicly available only at the hard copy location (e.g., copyrighted material, large maps, multi-volume reports), and some may not be available in either location (e.g., confidential business information (CBI)). To inspect the hard copy

materials, please schedule an appointment during normal business hours with the contact listed in the **FOR FURTHER INFORMATION CONTACT** section.

**FOR FURTHER INFORMATION CONTACT:**

Nancy Levin, EPA Region IX, (415) 972-3848, [Levin.Nancy@epa.gov](mailto:Levin.Nancy@epa.gov).

**SUPPLEMENTARY INFORMATION:**

Throughout this document, “we,” “us,” and “our” refer to EPA.

**Table of Contents**

- I. Proposed Action
- II. Public Comments and EPA Responses
- III. EPA Action

IV. Incorporation by Reference

V. Statutory and Executive Order Reviews

**I. Proposed Action**

On April 14, 2015, in 80 FR 19931, the EPA proposed approval of the following rule that was submitted for incorporation into the California SIP.

**TABLE 1—SUBMITTED RULE**

Local agency	Rule No.	Rule title	Adopted	Submitted
SCAQMD .....	223	Emission Reduction Permits for Large Confined Animal Facilities.	06/02/06	03/17/09

Our proposed action contains more information on the basis for this rulemaking and on our evaluation of the submittal.

**II. Public Comments and EPA Responses**

The EPA’s proposed action provided a 30-day public comment period. During this period, we received no comments.

**III. EPA Action**

No comments were submitted. Therefore, as authorized in section 110(k)(3) of the Act, EPA is fully approving this rule into the California SIP.

**IV. Incorporation by Reference**

In this rule, the EPA is finalizing regulatory text that includes incorporation by reference. In accordance with requirements of 1 CFR 51.5, the EPA is finalizing the incorporation by reference of the SCAQMD rules described in the amendments to 40 CFR part 52 set forth below. The EPA has made, and will continue to make, these documents available electronically through [www.regulations.gov](http://www.regulations.gov) and in hard copy at the appropriate EPA office (see the **ADDRESSES** section of this preamble for more information).

**V. Statutory and Executive Order Reviews**

Under the Clean Air Act, the Administrator is required to approve a SIP submission that complies with the provisions of the Act and applicable Federal regulations. 42 U.S.C. 7410(k); 40 CFR 52.02(a). Thus, in reviewing SIP submissions, EPA’s role is to approve state choices, provided that they meet the criteria of the Clean Air Act. Accordingly, this action merely approves state law as meeting Federal requirements and does not impose additional requirements beyond those imposed by state law. For that reason, this action:

- Is not a significant regulatory action subject to review by the Office of Management and Budget under Executive Orders 12866 (58 FR 51735, October 4, 1993) and 13563 (76 FR 3821, January 21, 2011);
- does not impose an information collection burden under the provisions of the Paperwork Reduction Act (44 U.S.C. 3501 *et seq.*);
- is certified as not having a significant economic impact on a substantial number of small entities under the Regulatory Flexibility Act (5 U.S.C. 601 *et seq.*);
- does not contain any unfunded mandate or significantly or uniquely affect small governments, as described in the Unfunded Mandates Reform Act of 1995 (Pub. L. 104–4);
- does not have Federalism implications as specified in Executive Order 13132 (64 FR 43255, August 10, 1999);
- is not an economically significant regulatory action based on health or safety risks subject to Executive Order 13045 (62 FR 19885, April 23, 1997);
- is not a significant regulatory action subject to Executive Order 13211 (66 FR 28355, May 22, 2001);
- is not subject to requirements of Section 12(d) of the National Technology Transfer and Advancement Act of 1995 (15 U.S.C. 272 note) because application of those requirements would be inconsistent with the Clean Air Act; and
- does not provide EPA with the discretionary authority to address, as appropriate, disproportionate human health or environmental effects, using practicable and legally permissible methods, under Executive Order 12898 (59 FR 7629, February 16, 1994).

In addition, the SIP is not approved to apply on any Indian reservation land or in any other area where EPA or an Indian tribe has demonstrated that a tribe has jurisdiction. In those areas of Indian country, the rule does not have tribal implications and will not impose

substantial direct costs on tribal governments or preempt tribal law as specified by Executive Order 13175 (65 FR 67249, November 9, 2000).

The Congressional Review Act, 5 U.S.C. 801 *et seq.*, as added by the Small Business Regulatory Enforcement Fairness Act of 1996, generally provides that before a rule may take effect, the agency promulgating the rule must submit a rule report, which includes a copy of the rule, to each House of the Congress and to the Comptroller General of the United States. EPA will submit a report containing this action and other required information to the U.S. Senate, the U.S. House of Representatives, and the Comptroller General of the United States prior to publication of the rule in the **Federal Register**. A major rule cannot take effect until 60 days after it is published in the **Federal Register**. This action is not a “major rule” as defined by 5 U.S.C. 804(2).

Under section 307(b)(1) of the Clean Air Act, petitions for judicial review of this action must be filed in the United States Court of Appeals for the appropriate circuit by September 11, 2015. Filing a petition for reconsideration by the Administrator of this final rule does not affect the finality of this action for the purposes of judicial review nor does it extend the time within which a petition for judicial review may be filed, and shall not postpone the effectiveness of such rule or action. This action may not be challenged later in proceedings to enforce its requirements (see section 307(b)(2)).

**List of Subjects in 40 CFR Part 52**

Environmental protection, Air pollution control, Incorporation by reference, Intergovernmental relations, Reporting and recordkeeping requirements, Volatile organic compounds.

Dated: June 9, 2015.

**Jared Blumenfeld,**

*Regional Administrator, Region IX.*

Part 52, chapter I, title 40 of the Code of Federal Regulations is amended as follows:

## **PART 52 [AMENDED]**

- 1. The authority citation for part 52 continues to read as follows:

**Authority:** 42 U.S.C. 7401 *et seq.*

### **Subpart F—California**

- 2. Section 52.220 is amended by adding paragraph (c)(363)(i)(F) to read as follows:

#### **§ 52.220 Identification of plan.**

\* \* \* \* \*

(c) \* \* \*  
(363) \* \* \*  
(i) \* \* \*

(F) South Coast Air Quality Management District.

(1) Rule 223, “Emission Reduction Permits for Large Confined Animal Facilities,” adopted on June 2, 2006.

\* \* \* \* \*

[FR Doc. 2015–16925 Filed 7–10–15; 8:45 am]

**BILLING CODE 6560–50–P**

## **ENVIRONMENTAL PROTECTION AGENCY**

### **40 CFR Part 52**

[EPA–R03–OAR–2014–0833; FRL–9930–31–Region 3]

### **Approval and Promulgation of Air Quality Implementation Plans; Maryland; Preconstruction Requirements—Nonattainment New Source Review**

**AGENCY:** Environmental Protection Agency (EPA).

**ACTION:** Final rule.

**SUMMARY:** The Environmental Protection Agency (EPA) is approving a State Implementation Plan (SIP) revision submitted on August 22, 2013 by the Maryland Department of the Environment (MDE) on behalf of the State of Maryland. This revision pertains to Maryland’s major nonattainment New Source Review (NSR) program, notably preconstruction permitting requirements for sources of fine particulate matter (PM<sub>2.5</sub>). This action is being taken under the Clean Air Act (CAA).

**DATES:** This final rule is effective on August 12, 2015.

**ADDRESSES:** EPA has established a docket for this action under Docket ID

Number EPA–R03–OAR–2014–0833. All documents in the docket are listed in the [www.regulations.gov](http://www.regulations.gov) Web site. Although listed in the electronic docket, some information is not publicly available, *i.e.*, confidential business information (CBI) or other information whose disclosure is restricted by statute. Certain other material, such as copyrighted material, is not placed on the Internet and will be publicly available only in hard copy form. Publicly available docket materials are available either electronically through [www.regulations.gov](http://www.regulations.gov) or in hard copy for public inspection during normal business hours at the Air Protection Division, U.S. Environmental Protection Agency, Region III, 1650 Arch Street, Philadelphia, Pennsylvania 19103. Copies of the State submittal are available at the Maryland Department of the Environment, 1800 Washington Boulevard, Suite 705, Baltimore, Maryland 21230.

**FOR FURTHER INFORMATION CONTACT:** David Talley, (215) 814–2117, or by email at [talley.david@epa.gov](mailto:talley.david@epa.gov).

#### **SUPPLEMENTARY INFORMATION:**

##### **I. Background**

On March 25, 2015 (80 FR 15713), EPA published a notice of proposed rulemaking (NPR) for the State of Maryland. In the NPR, EPA proposed approval of revisions to Maryland’s major nonattainment NSR program, notably preconstruction permitting requirements for sources of fine particulate matter (PM<sub>2.5</sub>). The formal SIP revision (#13–06) was submitted by MDE on August 22, 2013.

Generally, the revisions incorporate provisions related to the 2008 “Implementation of the New Source Review (NSR) Program for Particulate Matter Less than 2.5 Micrometers (PM<sub>2.5</sub>)” (2008 NSR PM<sub>2.5</sub> Rule). 73 FR 28321 (May 16, 2008). As discussed in the NPR, the 2008 NSR PM<sub>2.5</sub> Rule (as well as the 2007 “Final Clean Air Fine Particle Implementation Rule” (2007 PM<sub>2.5</sub> Implementation Rule)<sup>1</sup>), was the subject of litigation before the United States Court of Appeals for the District of Columbia Circuit (D.C. Circuit) in *Natural Resources Defense Council v. EPA* (hereafter, *NRDC v. EPA*).<sup>2</sup> On January 4, 2013, the D.C. Circuit remanded to EPA both the 2007 PM<sub>2.5</sub> Implementation Rule and the 2008 NSR PM<sub>2.5</sub> Rule. The court found that in both rules EPA erred in implementing the 1997 PM<sub>2.5</sub> National Ambient Air Quality Standard (NAAQS) solely pursuant to the general implementation

provisions of subpart 1 of part D of title I of the CAA (subpart 1), rather than pursuant to the additional implementation provisions specific to particulate matter in subpart 4 of part D of title I (subpart 4).<sup>3</sup> However, as was also discussed in the NPR, EPA’s final actions redesignating all of the areas in Maryland which were nonattainment for the 1997 PM<sub>2.5</sub> NAAQS to attainment obviated the need for MDE to submit a nonattainment NSR SIP addressing PM<sub>2.5</sub> requirements, including those under subpart 4. See 80 FR 15714. EPA, therefore, did not evaluate MDE’s August 22, 2013 SIP revision submittal for compliance with subpart 4. To the extent that any area in Maryland is designated as nonattainment for PM<sub>2.5</sub> in the future, MDE will have to make a submittal under CAA section 189 addressing how its nonattainment NSR permitting program satisfies all of the statutory requirements pertaining to PM<sub>2.5</sub>, including subpart 4.

##### **II. Summary of SIP Revision**

The 2008 NSR PM<sub>2.5</sub> Rule: (1) Required NSR permits to address directly emitted PM<sub>2.5</sub> and precursor pollutants; (2) established significant emission rates for direct PM<sub>2.5</sub> and precursor pollutants (including sulfur dioxide (SO<sub>2</sub>) and oxides of nitrogen (NO<sub>x</sub>)); (3) established PM<sub>2.5</sub> emission offsets; and (4) required states to account for gases that condense to form particles (condensables) in PM<sub>2.5</sub> emission limits.

To implement these provisions, Maryland amended Regulation .01 under COMAR 26.11.01 (General Administrative Provisions) and Regulations .01 and .02 under COMAR 26.11.17 (Nonattainment Provisions for Major New Sources and Major Modifications). The general definitions at COMAR 26.11.01.01 were amended to add definitions of “PM<sub>2.5</sub>” and “PM<sub>2.5</sub> emissions.” COMAR 26.11.17 contains the preconstruction requirements for new major stationary sources and major modifications locating in nonattainment areas. The definitions of “regulated NSR pollutant” and “significant” under COMAR 26.11.17.01 were amended. The amended definitions require that sources account for the condensable fraction of PM<sub>10</sub> and PM<sub>2.5</sub>, require that NO<sub>x</sub> and SO<sub>2</sub> be regulated as precursors to PM<sub>10</sub> and PM<sub>2.5</sub>, and establish

<sup>3</sup> The court’s opinion did not specifically address the point that implementation under subpart 4 requirements would still require consideration of subpart 1 requirements, to the extent that subpart 4 did not override subpart 1. EPA assumes that the court presumed that EPA would address this issue of potential overlap between subpart 1 and subpart 4 requirements in subsequent actions.

<sup>1</sup> 72 FR 20586 (April 25, 2007).

<sup>2</sup> 706 F.3d 428 (D.C. Cir. 2013).



significant emission rates (SERs) for PM<sub>2.5</sub> and its precursors. COMAR 26.11.17.02 was revised to specify that all of the major nonattainment NSR preconstruction requirements of the chapter are applicable to new major stationary sources and major modifications that are major for PM<sub>2.5</sub> or its precursors. COMAR 26.11.17.02 was also revised to clarify that in addition to the requirements of that chapter, the Prevention of Significant Deterioration (PSD) requirements of COMAR 26.11.04.16 may also apply to sources locating in nonattainment areas.

Other specific requirements of MDE's August 22, 2013 SIP revision submittal and the rationale for EPA's proposed action are explained in the NPR and will not be restated here. No public comments were received on the NPR.

### III. Final Action

EPA is approving MDE's August 22, 2013 submittal as a revision to the Maryland SIP.

### IV. Incorporation by Reference

In this rulemaking action, the EPA is finalizing regulatory text that includes incorporation by reference. In accordance with requirements of 1 CFR 51.5, the EPA is finalizing the incorporation by reference of the MDE rules regarding definitions and permitting requirements discussed in section II of this preamble. The EPA has made, and will continue to make, these documents generally available electronically through [www.regulations.gov](http://www.regulations.gov) and/or in hard copy at the appropriate EPA office (see the **ADDRESSES** section of this preamble for more information).

### V. Statutory and Executive Order Reviews

#### A. General Requirements

Under the CAA, the Administrator is required to approve a SIP submission that complies with the provisions of the CAA and applicable Federal regulations. 42 U.S.C. 7410(k); 40 CFR 52.02(a). Thus, in reviewing SIP submissions, EPA's role is to approve state choices, provided that they meet the criteria of the CAA. Accordingly, this action merely approves state law as meeting Federal requirements and does not impose additional requirements beyond those imposed by state law. For that reason, this action:

- Is not a "significant regulatory action" subject to review by the Office

of Management and Budget under Executive Order 12866 (58 FR 51735, October 4, 1993);

- does not impose an information collection burden under the provisions of the Paperwork Reduction Act (44 U.S.C. 3501 *et seq.*);
  - is certified as not having a significant economic impact on a substantial number of small entities under the Regulatory Flexibility Act (5 U.S.C. 601 *et seq.*);
  - does not contain any unfunded mandate or significantly or uniquely affect small governments, as described in the Unfunded Mandates Reform Act of 1995 (Pub. L. 104-4);
  - does not have Federalism implications as specified in Executive Order 13132 (64 FR 43255, August 10, 1999);
  - is not an economically significant regulatory action based on health or safety risks subject to Executive Order 13045 (62 FR 19885, April 23, 1997);
  - is not a significant regulatory action subject to Executive Order 13211 (66 FR 28355, May 22, 2001);
  - is not subject to requirements of Section 12(d) of the National Technology Transfer and Advancement Act of 1995 (15 U.S.C. 272 note) because application of those requirements would be inconsistent with the CAA; and
  - does not provide EPA with the discretionary authority to address, as appropriate, disproportionate human health or environmental effects, using practicable and legally permissible methods, under Executive Order 12898 (59 FR 7629, February 16, 1994).
- In addition, this rule does not have tribal implications as specified by Executive Order 13175 (65 FR 67249, November 9, 2000), because the SIP is not approved to apply in Indian country located in the state, and EPA notes that it will not impose substantial direct costs on tribal governments or preempt tribal law.

#### B. Submission to Congress and the Comptroller General

The Congressional Review Act, 5 U.S.C. 801 *et seq.*, as added by the Small Business Regulatory Enforcement Fairness Act of 1996, generally provides that before a rule may take effect, the agency promulgating the rule must submit a rule report, which includes a copy of the rule, to each House of the Congress and to the Comptroller General of the United States. EPA will submit a report containing this action and other required information to the U.S. Senate,

the U.S. House of Representatives, and the Comptroller General of the United States prior to publication of the rule in the **Federal Register**. A major rule cannot take effect until 60 days after it is published in the **Federal Register**. This action is not a "major rule" as defined by 5 U.S.C. 804(2).

#### C. Petitions for Judicial Review

Under section 307(b)(1) of the CAA, petitions for judicial review of this action must be filed in the United States Court of Appeals for the appropriate circuit by September 11, 2015. Filing a petition for reconsideration by the Administrator of this final rule does not affect the finality of this action for the purposes of judicial review nor does it extend the time within which a petition for judicial review may be filed, and shall not postpone the effectiveness of such rule or action. This action pertaining to Maryland's nonattainment NSR program may not be challenged later in proceedings to enforce its requirements. (See section 307(b)(2).)

#### List of Subjects in 40 CFR Part 52

Environmental protection, Air pollution control, Carbon monoxide, Incorporation by reference, Intergovernmental relations, Nitrogen dioxide, Ozone, Particulate matter, Reporting and recordkeeping requirements, Sulfur oxides, Volatile organic compounds.

Dated: June 26, 2015.

**William C. Early,**

*Acting Regional Administrator, Region III.*

For the reasons stated in the preamble, title 40, chapter I, of the Code of Federal Regulations is amended as follows:

### PART 52—APPROVAL AND PROMULGATION OF IMPLEMENTATION PLANS

- 1. The authority citation for part 52 continues to read as follows:

**Authority:** 42 U.S.C. 7401 *et seq.*

#### Subpart V—Maryland

- 2. In § 52.1070, the table in paragraph (c) is amended by revising the entries for COMAR 26.11.01.01, 26.11.17.01, and 26.11.17.02 to read as follows:

#### § 52.1070 Identification of plan.

\* \* \* \* \*

(c) \* \* \*



## EPA-APPROVED REGULATIONS, TECHNICAL MEMORANDA, AND STATUTES IN THE MARYLAND SIP

Code of Maryland Administrative Regulations (COMAR) citation	Title/subject	State effective date	EPA approval date	Additional explanation/ citation at 40 CFR 52.1100
<b>26.11.01 General Administrative Provisions</b>				
26.11.01.01 .....	Definitions .....	7/8/13	7/13/15 [Insert <b>Federal Register</b> citation].	
*	*	*	*	*
<b>26.11.17 Requirements for Major New Sources and Modifications</b>				
26.11.17.01 .....	Definitions .....	7/8/13	7/13/15 [Insert <b>Federal Register</b> citation].	
26.11.17.02 .....	Applicability .....	7/8/13	7/13/15 [Insert <b>Federal Register</b> citation].	
*	*	*	*	*

\* \* \* \* \*

[FR Doc. 2015-16918 Filed 7-10-15; 8:45 am]

BILLING CODE 6560-50-P

**ENVIRONMENTAL PROTECTION  
AGENCY****40 CFR Parts 52 and 81****[EPA-R04-OAR-2014-0870; FRL-9930-49-  
Region 4]****Approval and Promulgation of  
Implementation Plans and Designation  
of Areas for Air Quality Planning  
Purposes; Tennessee; Redesignation  
of the Knoxville 2008 8-Hour Ozone  
Nonattainment Area to Attainment****AGENCY:** Environmental Protection  
Agency (EPA).**ACTION:** Final rule.

**SUMMARY:** The Environmental Protection Agency (EPA) is taking four separate final actions related to a state implementation plan (SIP) revision submitted by the State of Tennessee, through the Tennessee Department of Environment and Conservation (TDEC), Division of Air Pollution Control, on November 14, 2014, for the Knoxville, Tennessee 8-hour ozone nonattainment area (hereinafter referred to as the "Knoxville Area" or "Area"). The Knoxville Area includes a portion of Anderson County as well as Blount and Knox Counties in their entirety. EPA is approving the base year emissions inventory for the 2008 8-hour ozone national ambient air quality standards (NAAQS) for the Knoxville Area; determining that the Knoxville Area is attaining the 2008 8-hour ozone NAAQS; approving into the SIP the State's plan for maintaining attainment of the 2008 8-hour ozone NAAQS in the

Area, including the 2011 and 2026 motor vehicle emission budgets (MVEBs) for nitrogen oxides (NO<sub>x</sub>) and volatile organic compounds (VOC); and redesignating the Area to attainment for the 2008 8-hour ozone NAAQS. EPA is also finding the 2011 and 2026 MVEBs for NO<sub>x</sub> and VOC for the Knoxville Area adequate for the purposes of transportation conformity.

**DATES:** This rule is effective August 12, 2015.

**ADDRESSES:** EPA has established a docket for this action under Docket Identification No. EPA-R04-OAR-2014-0870. All documents in the docket are listed on the [www.regulations.gov](http://www.regulations.gov) Web site. Although listed in the index, some information may not be publicly available, i.e., Confidential Business Information or other information whose disclosure is restricted by statute. Certain other material, such as copyrighted material, is not placed on the Internet and will be publicly available only in hard copy form. Publicly available docket materials are available either electronically through [www.regulations.gov](http://www.regulations.gov) or in hard copy at the Air Regulatory Management Section (formerly the Regulatory Development Section), Air Planning and Implementation Branch (formerly the Air Planning Branch), Air, Pesticides and Toxics Management Division, U.S. Environmental Protection Agency, Region 4, 61 Forsyth Street SW., Atlanta, Georgia 30303-8960. EPA requests that if at all possible, you contact the person listed in the **FOR FURTHER INFORMATION CONTACT** section to schedule your inspection. The Regional Office's official hours of business are Monday through Friday, 8:30 a.m. to 4:30 p.m., excluding Federal holidays.

**FOR FURTHER INFORMATION CONTACT:** Jane Spann or Tiereny Bell of the Air Regulatory Management Section, in the Air Planning and Implementation Branch, Air, Pesticides and Toxics Management Division, U.S. Environmental Protection Agency, Region 4, 61 Forsyth Street SW., Atlanta, Georgia 30303-8960. Ms. Spann may be reached by phone at (404) 562-9029 or via electronic mail at [spann.jane@epa.gov](mailto:spann.jane@epa.gov). Ms. Bell may be reached by phone at (404) 562-9088 or via electronic mail at [bell.tiereny@epa.gov](mailto:bell.tiereny@epa.gov).

**SUPPLEMENTARY INFORMATION:****I. Background for Final Actions**

On May 21, 2012, EPA designated areas as unclassifiable/attainment or nonattainment for the 2008 8-hour ozone NAAQS that was promulgated on March 27, 2008. *See* 77 FR 30088. The Knoxville Area was designated as nonattainment for the 2008 8-hour ozone NAAQS and classified as a marginal nonattainment area. On November 14, 2014, TDEC requested that EPA redesignate the Area to attainment for the 2008 8-hour ozone NAAQS and submitted a SIP revision containing a base year emissions inventory for the Area to address the requirements of Clean Air Act (CAA or Act) section 182(a)(1) and the State's plan for maintaining attainment of the 2008 8-hour ozone standard in the Area, including the 2011 and 2026 MVEBs for NO<sub>x</sub> and VOC. In a notice of proposed rulemaking (NPR) published on May 21, 2015, EPA proposed to approve the base year emissions inventory for the 2008 8-hour ozone NAAQS for the Knoxville Area; to determine that the Knoxville Area is attaining the 2008 8-hour ozone NAAQS; to approve into the SIP the

State's plan for maintaining attainment of the 2008 8-hour ozone standard in the Area, including the 2011 and 2026 MVEBs for NO<sub>x</sub> and VOC; and to redesignate the Area to attainment for the 2008 8-hour ozone NAAQS. *See* 80 FR 29237. In that notice, EPA also notified the public of the status of the Agency's adequacy determination for the Knoxville Area NO<sub>x</sub> and VOC MVEBs.<sup>1</sup> The details of Tennessee's submittal and the rationale for EPA's actions are explained in the NPR. EPA received one comment on the May 21, 2015, NPR. This comment is provided in the docket for today's final actions and supports those actions. EPA's response to the comment is provided below.

## II. EPA's Response to Comment

The Commenter "support[s] this docket as written" and states that "it is clear the metro area [Knoxville] is in attainment of the 2008 8-hour ozone standard." Although supportive of the actions, the Commenter is "somewhat suspicious of the large projected decreases in NO<sub>x</sub> from [on] road sources, given that vehicle traffic will almost certainly be increasing throughout the modeled time period." The Commenter believes that it "seems likely that smaller. . . reductions in NO<sub>x</sub> from [on] road sources. . . will still result in continued attainment of the ozone standard given that current NO<sub>x</sub> emissions are resulting in ozone attainment."

EPA does not view this comment as adverse. Regarding the magnitude of the projected on-road mobile source NO<sub>x</sub> emissions reductions given increased vehicle traffic, EPA notes that Tennessee used the interagency consultation process required by 40 CFR part 93 (known as the Transportation Conformity Rule) which requires EPA, the United States Department of Transportation, metropolitan planning organizations (MPOs), state departments of transportation, and State and local air quality agencies to work together to develop applicable implementation plans. The planning assumptions used to develop on-road NO<sub>x</sub> emissions estimates for the Knoxville Area maintenance plan applied emissions

factors developed from the latest EPA-approved mobile emissions model (known as the Motor Vehicle Emissions Simulator or MOVES2014) and did consider increased vehicle traffic by incorporating the increased vehicle miles travelled from the MPO's travel demand model. MOVES2014 is the state-of-the-science emissions model that incorporates the newest emissions control regulatory programs.

## III. What are the effects of these actions?

Approval of Tennessee's redesignation request changes the legal designation of Blount and Knox Counties and the portion of Anderson County included in the Knoxville Area, found at 40 CFR 81.343, from nonattainment to attainment for the 2008 8-hour ozone NAAQS. Approval of Tennessee's associated SIP revision also incorporates a plan for maintaining the 2008 8-hour ozone NAAQS in the Knoxville Area through 2026 and a section 182(a)(1) base year emissions inventory into the Tennessee SIP. The maintenance plan establishes NO<sub>x</sub> and VOC MVEBs for 2011 and 2026 for the Knoxville Area and includes contingency measures to remedy any future violations of the 2008 8-hour ozone NAAQS and procedures for evaluation of potential violations. The NO<sub>x</sub> MVEBs for 2011 and 2026 are 41.62 tons per day (tpd) and 17.69 tpd, respectively. The VOC MVEBs for 2011 and 2026 are 19.71 tpd and 10.49 tpd, respectively. Additionally, EPA is finding the newly-established NO<sub>x</sub> and VOC MVEBs for the Knoxville Area adequate for the purpose of transportation conformity. Within 24 months from this final rule, the transportation partners will need to demonstrate conformity to the new NO<sub>x</sub> and VOC MVEBs pursuant to 40 CFR 93.104(e).

## IV. Final Actions

EPA is taking four separate but related actions regarding the Knoxville Area's redesignation to attainment and maintenance of the 2008 8-hour ozone NAAQS. First, EPA is approving Tennessee's section 182(a)(1) base year emissions inventory for the 2008 8-hour ozone standard for the Knoxville Area into the SIP. Approval of the base year inventory is a prerequisite for EPA to redesignate the Area from nonattainment to attainment.

Second, EPA is determining that the Knoxville Area is attaining the 2008 8-hour ozone NAAQS based on complete, quality-assured and certified monitoring data for the 2011–2013 monitoring period. The 2012–2014 data in the Air

Quality System indicates that the Area is continuing to attain the 2008 8-hour ozone NAAQS.

Third, EPA is approving the maintenance plan for the Knoxville Area, including the NO<sub>x</sub> and VOC MVEBs for 2011 and 2026, into the Tennessee SIP (under CAA section 175A). The maintenance plan demonstrates that the Area will continue to maintain the 2008 8-hour ozone NAAQS, and the budgets meet all of the adequacy criteria contained in 40 CFR 93.118(e)(4) and (5).

Fourth, EPA is determining that Tennessee has met the criteria under CAA section 107(d)(3)(E) for the Knoxville Area for redesignation from nonattainment to attainment for the 2008 8-hour ozone NAAQS. On this basis, EPA is approving Tennessee's redesignation request for the 2008 8-hour ozone NAAQS for the Knoxville Area. As mentioned above, approval of the redesignation request changes the official designation of Blount and Knox Counties and the portion of Anderson County in the Knoxville Area for the 2008 8-hour ozone NAAQS from nonattainment to attainment, as found at 40 CFR part 81.

EPA is also finding the newly-established NO<sub>x</sub> and VOC MVEBs for the Knoxville Area adequate for the purpose of transportation conformity. Within 24 months from this final rule, the transportation partners will need to demonstrate conformity to the new NO<sub>x</sub> and VOC MVEBs pursuant to 40 CFR 93.104(e).

## V. Statutory and Executive Order Reviews

Under the CAA, redesignation of an area to attainment and the accompanying approval of the maintenance plan under CAA section 107(d)(3)(E) are actions that affect the status of geographical area and do not impose any additional regulatory requirements on sources beyond those required by state law. A redesignation to attainment does not in and of itself impose any new requirements, but rather results in the application of requirements contained in the CAA for areas that have been redesignated to attainment. Moreover, the Administrator is required to approve a SIP submission that complies with the provisions of the Act and applicable Federal regulations. *See* 42 U.S.C. 7410(k); 40 CFR 52.02(a). Thus, in reviewing SIP submissions, EPA's role is to approve state choices, provided that they meet the criteria of the CAA. Accordingly, these actions merely approve state law as meeting Federal requirements and do not impose additional requirements beyond those

<sup>1</sup> Tennessee's November 14, 2015, SIP submission, including the Knoxville Area NO<sub>x</sub> and VOC MVEBs, was open for public comment on EPA's adequacy Web site on December 4, 2014, found at: <http://www.epa.gov/otaq/stateresources/transconf/cursips.htm#knx-tn>. The EPA public comment period on adequacy for the MVEBs for 2011 and 2026 for the Knoxville Area closed on January 5, 2015. No comments, adverse or otherwise, were received during EPA's adequacy process for the MVEBs associated with Tennessee's maintenance plan.

imposed by state or federal law. For these reasons, these actions:

- Are not a significant regulatory actions subject to review by the Office of Management and Budget under Executive Orders 12866 (58 FR 51735, October 4, 1993) and 13563 (76 FR 3821, January 21, 2011);
- do not impose an information collection burden under the provisions of the Paperwork Reduction Act (44 U.S.C. 3501 *et seq.*);
- are certified as not having a significant economic impact on a substantial number of small entities under the Regulatory Flexibility Act (5 U.S.C. 601 *et seq.*);
- do not contain any unfunded mandate or significantly or uniquely affect small governments, as described in the Unfunded Mandates Reform Act of 1995 (Pub. L. 104–4);
- do not have Federalism implications as specified in Executive Order 13132 (64 FR 43255, August 10, 1999);
- are not economically significant regulatory actions based on health or safety risks subject to Executive Order 13045 (62 FR 19885, April 23, 1997);
- are not a significant regulatory action subject to Executive Order 13211 (66 FR 28355, May 22, 2001);
- are not subject to requirements of Section 12(d) of the National Technology Transfer and Advancement Act of 1995 (15 U.S.C. 272 note) because application of those requirements would be inconsistent with the CAA; and
- do not provide EPA with the discretionary authority to address, as appropriate, disproportionate human health or environmental effects, using practicable and legally permissible

methods, under Executive Order 12898 (59 FR 7629, February 16, 1994).

The SIP is not approved to apply on any Indian reservation land or in any other area where EPA or an Indian tribe has demonstrated that a tribe has jurisdiction. In those areas of Indian country, the rule does not have tribal implications as specified by Executive Order 13175 (65 FR 67249, November 9, 2000), nor will it impose substantial direct costs on tribal governments or preempt tribal law.

The Congressional Review Act, 5 U.S.C. 801 *et seq.*, as added by the Small Business Regulatory Enforcement Fairness Act of 1996, generally provides that before a rule may take effect, the agency promulgating the rule must submit a rule report, which includes a copy of the rule, to each House of the Congress and to the Comptroller General of the United States. EPA will submit a report containing this action and other required information to the U.S. Senate, the U.S. House of Representatives, and the Comptroller General of the United States prior to publication of the rule in the **Federal Register**. A major rule cannot take effect until 60 days after it is published in the **Federal Register**. This action is not a “major rule” as defined by 5 U.S.C. 804(2).

Under section 307(b)(1) of the CAA, petitions for judicial review of this action must be filed in the United States Court of Appeals for the appropriate circuit by September 11, 2015. Filing a petition for reconsideration by the Administrator of this final rule does not affect the finality of this action for the purposes of judicial review nor does it extend the time within which a petition for judicial review may be filed, and shall not postpone the effectiveness of

such rule or action. This action may not be challenged later in proceedings to enforce its requirements. *See* section 307(b)(2).

#### List of Subjects

##### 40 CFR Part 52

Environmental protection, Air pollution control, Incorporation by reference, Intergovernmental relations, Nitrogen dioxide, Ozone, Reporting and recordkeeping requirements, Volatile organic compounds.

##### 40 CFR Part 81

Environmental protection, Air pollution control.

Dated: July 6, 2015.

**Heather McTeer Toney,**

*Regional Administrator, Region 4.*

40 CFR parts 52 and 81 are amended as follows:

#### PART 52—APPROVAL AND PROMULGATION OF IMPLEMENTATION PLANS

- 1. The authority citation for part 52 continues to read as follows:

*Authority:* 42 U.S.C. 7401 *et seq.*

##### Subpart RR—Tennessee

- 2. Section 52.2220(e) is amended by adding two new entries for “2008 8-hour Ozone Maintenance Plan for the Knoxville Area” and “2008 8-hour Ozone Emissions Inventory for the Knoxville Area” at the end of the table to read as follows:

##### § 52.2220 Identification of plan.

\* \* \* \* \*

(e) \* \* \*

#### EPA-APPROVED TENNESSEE NON-REGULATORY PROVISIONS

Name of non-regulatory SIP provision	Applicable geographic or non-attainment area	State effective date	EPA Approval date	Explanation
* * *	* * *	* * *	* * *	* * *
2008 8-hour Ozone Maintenance Plan for the Knoxville Area.	Blount County, Knox County, and a portion of Anderson County.	11/14/14	7/13/15 [Insert citation of publication].	
2008 8-hour Ozone Emissions Inventory for the Knoxville Area.	Blount County, Knox County, and a portion of Anderson County.	11/14/14	.....	

#### PART 81—DESIGNATION OF AREAS FOR AIR QUALITY PLANNING PURPOSES

- 3. The authority citation for part 81 continues to read as follows:

*Authority:* 42 U.S.C. 7401 *et seq.*

- 4. In § 81.343, the table entitled “Tennessee-2008 8-Hour Ozone NAAQS (Primary and secondary)” is amended by revising the entries for “Knoxville,

TN,” “Anderson County (part),” “Blount County,” and “Knox County” to read as follows:

##### § 81.343 Tennessee.

\* \* \* \* \*

TENNESSEE-2008 8-HOUR OZONE NAAQS  
[Primary and secondary]

Designated area	Designation		Category/Classification	
	Date <sup>1</sup>	Type	Date <sup>1</sup>	Type
Knoxville, TN <sup>2</sup> .....	This action is effective 7/13/15 ....	Attainment .....	.....	.....
Anderson County (part):				
2000 Census tracts: 202, .....	.....	.....	.....	.....
213.02.				
Blount County .....	.....	.....	.....	.....
Knox County .....	.....	.....	.....	.....
*                      *	*	*	*	*

<sup>1</sup> This date is July 20, 2012, unless otherwise noted.

<sup>2</sup> Excludes Indian country located in each area, unless otherwise noted.

<sup>3</sup> Includes any Indian country in each county or area, unless otherwise specified.

\*       \*       \*       \*       \*

[FR Doc. 2015-17055 Filed 7-10-15; 8:45 am]

BILLING CODE 6560-50-P

# Proposed Rules

Federal Register

Vol. 80, No. 133

Monday, July 13, 2015

This section of the FEDERAL REGISTER contains notices to the public of the proposed issuance of rules and regulations. The purpose of these notices is to give interested persons an opportunity to participate in the rule making prior to the adoption of the final rules.

## FEDERAL RETIREMENT THRIFT INVESTMENT BOARD

### 5 CFR Parts 1600, 1601, and 1651

#### Default Investment Fund

**AGENCY:** Federal Retirement Thrift Investment Board

**ACTION:** Proposed rule with request for comments.

**SUMMARY:** The Federal Retirement Thrift Investment Board (Agency) proposes to amend its regulations to change the default investment fund for certain participants in the Thrift Savings Plan (TSP).

**DATES:** Submit comments on or before August 12, 2015.

**ADDRESSES:** You may submit comments using one of the following methods:

- *Federal Rulemaking Portal:* <http://www.regulations.gov> at Docket ID number FRTIB-2015-0002. Follow the instructions for submitting comments.
- *Mail:* Office of General Counsel, Attn: James Petrick, Federal Retirement Thrift Investment Board, 77 K Street NE., Suite 1000, Washington, DC 20002.
- *Hand Delivery/Courier:* The address for sending comments by hand delivery or courier is the same as that for submitting comments by mail.
- *Facsimile:* Comments may be submitted by facsimile at (202) 942-1676.

The most helpful comments explain the reason for any recommended change and include data, information, and the authority that supports the recommended change.

**FOR FURTHER INFORMATION CONTACT:** Austen Townsend at (202) 864-8647.

**SUPPLEMENTARY INFORMATION:** The Agency administers the TSP, which was established by the Federal Employees' Retirement System Act of 1986 (FERSA), Public Law 99-335, 100 Stat. 514. The TSP provisions of FERSA are codified, as amended, largely at 5 U.S.C. 8351 and 8401-79. The TSP is a tax-deferred retirement savings plan for Federal civilian employees, members of

the uniformed services, and spouse beneficiaries. The TSP is similar to cash or deferred arrangements established for private-sector employees under section 401(k) of the Internal Revenue Code (26 U.S.C. 401(k)).

On December 18, 2014, the President signed the Smart Savings Act ("the Act"), Public Law 113-255 (128 Stat. 2920). The Act directed the Agency to invest any sums available for investment in the TSP for which an election has not been made in an age-appropriate target date asset allocation investment fund. The Act excluded contributions made by members of the uniformed services for which an election has not been made. This proposed rule would conform the Agency's regulations to the requirements of the Act.

#### New Default Investment Fund for Certain Participants

This proposed regulation would change the TSP's default investment fund from the TSP's Government Securities Investment Fund (G Fund) to the age-appropriate TSP Lifecycle Fund (L Fund) for the following persons: (1) A civilian employee with a newly established TSP account; (2) a rehired civilian employee who has a zero account balance; and (3) the surviving spouse beneficiary of a deceased TSP participant for whom a beneficiary participant account is established. The default investment fund for uniformed services participants will remain the G Fund as required by the Act. In the case of a rehired civilian participant who has a positive account balance and a contribution allocation in effect, the participant's contribution allocation will remain in effect. In the case of a rehired participant who has a positive account balance and no contribution allocation in effect, the participant's new contribution will continue to be invested in the G Fund. Participants whose default investment fund is the age-appropriate L Fund will receive a notification concerning investment risk before enrollment or as soon as practicable thereafter.

#### Regulatory Flexibility Act

I certify that this proposed regulation will not have a significant economic impact on a substantial number of small entities. This proposed regulation will affect Federal civilian employees and spouse beneficiaries who participate in

the Thrift Savings Plan, which is a Federal defined contribution retirement savings plan created under the Federal Employees' Retirement System Act of 1986 (FERSA), Public Law 99-335, 100 Stat. 514, and which is administered by the Agency.

#### Paperwork Reduction Act

I certify that these proposed regulations do not require additional reporting under the criteria of the Paperwork Reduction Act.

#### Unfunded Mandates Reform Act of 1995

Pursuant to the Unfunded Mandates Reform Act of 1995, 2 U.S.C. 602, 632, 653, 1501-1571, the effects of this proposed regulation on state, local, and tribal governments and the private sector have been assessed. This proposed regulation will not compel the expenditure in any one year of \$100 million or more by state, local, and tribal governments, in the aggregate, or by the private sector. Therefore, a statement under section 1532 is not required.

#### List of Subjects in 5 CFR Parts 1600, 1601, and 1651

Government employees, Pensions, Retirement.

**Gregory T. Long,**

*Executive Director, Federal Retirement Thrift Investment Board.*

For the reasons stated in the preamble, the Agency proposes to amend 5 CFR chapter VI as follows:

#### PART 1600—EMPLOYEE CONTRIBUTION ELECTIONS, CONTRIBUTION ALLOCATIONS, AND AUTOMATIC ENROLLMENT PROGRAM

- 1. The authority citation for part 1600 continues to read as follows:

**Authority:** 5 U.S.C. 8351, 8432(a), 8432(b), 8432(c), 8432(j), 8432d, 8474(b)(5) and (c)(1).

- 2. Amend § 1600.37 by revising the heading, the introductory text, and paragraphs (c) and (d), and by adding paragraph (e) to read as follows:

#### § 1600.37 Notice.

The Board shall furnish all new employees and all rehired employees covered by the automatic enrollment

program a notice that accurately describes:

\* \* \* \* \*

(c) The fund in which the default employee and agency contributions will be invested unless the employee makes a contribution allocation;

(d) The employee's ability to request a refund of any default employee contributions (adjusted for allocable gains and losses) and the procedure to request such a refund; and

(e) That an investment in any fund other than the G Fund is made at the employee's risk, that the employee is not protected by the United States Government or the Board against any loss on the investment, and that neither the United States Government nor the Board guarantees any return on the investment.

#### **PART 1601—PARTICIPANTS' CHOICES OF TSP FUNDS**

■ 3. The authority citation for part 1601 continues to read as follows:

**Authority:** 5 U.S.C. 8351, 8432d, 8438, 8474(b)(5) and (c)(1).

■ 4. Amend § 1601.13, by revising paragraphs (a)(3) and (4), redesignating paragraph (a)(5) as (a)(6) and revising it, and adding a new paragraph (a)(5) to read as follows:

#### **§ 1601.13 Elections.**

(a) \* \* \*

(3) A uniformed services participant or a participant enrolled prior to [EFFECTIVE DATE OF FINAL REGULATION] who elects for the first time to invest in a TSP Fund other than the G Fund must execute an acknowledgement of risk in accordance with § 1601.33;

(4) All deposits made on behalf of a participant enrolled prior to [EFFECTIVE DATE OF FINAL REGULATION] or a uniformed services participant who does not have a contribution allocation in effect will be invested in the G Fund. A participant who is enrolled prior to [EFFECTIVE DATE OF FINAL REGULATION] and subsequently rehired after [EFFECTIVE DATE OF FINAL REGULATION] and has a positive account balance will be considered enrolled prior to [EFFECTIVE DATE OF FINAL REGULATION] for purposes of this paragraph;

(5) All deposits made on behalf of a participant first enrolled on or after [EFFECTIVE DATE OF FINAL REGULATION] who does not have a contribution allocation in effect will be invested in the age-appropriate TSP Lifecycle Fund; and

(6) Once a contribution allocation becomes effective, it remains in effect until it is superseded by a subsequent contribution allocation or the participant's account balance is reduced to zero. If a rehired participant has a positive account balance and a contribution allocation in effect, then the participant's contribution allocation will remain in effect until a new allocation is made. If, however, the participant has a zero account balance, then the participant's contributions will be allocated to the age-appropriate TSP Lifecycle Fund until a new allocation is made.

\* \* \* \* \*

#### **§ 1601.22 [Amended]**

■ 5. Amend § 1601.22 by removing paragraph (a)(3).

■ 6. Amend § 1601.33 by revising the first sentence of paragraph (a), to read as follows:

#### **§ 1601.33 Acknowledgement of risk.**

(a) A uniformed services participant or a participant enrolled prior to [EFFECTIVE DATE OF FINAL REGULATION] who wants to invest in a TSP Fund other than the G Fund must execute an acknowledgement of risk for that fund. \* \* \*

\* \* \* \* \*

#### **PART 1651—DEATH BENEFITS**

■ 7. The authority citation for part 1651 continues to read as follows:

**Authority:** 5 U.S.C. 8424(d), 8432d, 8432(j), 8433(e), 8435(c)(2), 8474(b)(5) and 8474(c)(1).

■ 8. Amend § 1651.2, by revising the last sentence of paragraph (d) to read as follows:

#### **§ 1651.2 Entitlement to funds in a deceased participant's account.**

\* \* \* \* \*

(d) \* \* \* The account will accrue earnings at the G Fund rate in accordance with 5 CFR part 1645 until it is paid out or a beneficiary participant account is established under this part.

■ 3. Amend § 1651.19, by revising the first sentence of paragraph (a) to read as follows:

#### **§ 1651.19 Beneficiary participant accounts.**

\* \* \* \* \*

(a) \* \* \* Regardless of the allocation of the deceased participant's account balance at the time of his or her death, each beneficiary participant account, once established, will be allocated 100 percent to the age-appropriate TSP

Lifecycle Fund based on the beneficiary participant's date of birth. \* \* \*

\* \* \* \* \*

[FR Doc. 2015-16867 Filed 7-10-15; 8:45 am]

**BILLING CODE 6760-01-P**

#### **FEDERAL RETIREMENT THRIFT INVESTMENT BOARD**

#### **5 CFR Part 1653**

#### **Criminal Restitution Orders**

**AGENCY:** Federal Retirement Thrift Investment Board.

**ACTION:** Proposed rule with request for comments.

**SUMMARY:** The Federal Retirement Thrift Investment Board (Agency) proposes to amend its procedures for processing criminal restitution orders to: (1) Require an enforcement letter from the Department of Justice stating that restitution has been ordered under the Mandatory Victims Restitution Act; and (2) provide that the Agency will treat a judgment ordering restitution under the Mandatory Victims Restitution Act as a final judgment. The Agency also proposes to make two technical corrections.

**DATES:** Submit comments on or before August 12, 2015.

**ADDRESSES:** You may submit comments using one of the following methods:

- *Federal Rulemaking Portal:* <http://www.regulations.gov> at Docket ID number FRTIB-2015-0001. Follow the instructions for submitting comments.
- *Mail:* Office of General Counsel, Attn: James Petrick, Federal Retirement Thrift Investment Board, 77 K Street NE., Suite 1000, Washington, DC 20002.
- *Hand Delivery/Courier:* The address for sending comments by hand delivery or courier is the same as that for submitting comments by mail.
- *Facsimile:* Comments may be submitted by facsimile at (202) 942-1676.

The most helpful comments explain the reason for any recommended change and include data, information, and the authority that supports the recommended change.

**FOR FURTHER INFORMATION CONTACT:** Laurissa Stokes at (202) 942-1645.

**SUPPLEMENTARY INFORMATION:** The Agency administers the Thrift Savings Plan (TSP), which was established by the Federal Employees' Retirement System Act of 1986 (FERSA), Public Law 99-335, 100 Stat. 514. The TSP provisions of FERSA are codified, as amended, largely at 5 U.S.C. 8351 and 8401-79. The TSP is a tax-deferred retirement savings plan for Federal

civilian employees and members of the uniformed services. The TSP is similar to cash or deferred arrangements established for private-sector employees under section 401(k) of the Internal Revenue Code (26 U.S.C. 401(k)).

The Agency's governing statute includes an anti-alienation provision that generally protects TSP funds from execution, levy, attachment, garnishment, or other legal process. 5 U.S.C. 8437(c)(2). However, there are exceptions for certain court orders such as criminal restitution orders under the Mandatory Victims Restitution Act (MVRA) of 1996. The Department of Justice (DOJ) may request a payment from a participant's TSP account to enforce a judgment that orders restitution under the MVRA.

On September 10, 2014, the Agency published regulations explaining the Agency's procedures for processing payments for the enforcement of criminal restitution orders. 79 FR 53603 (September 10, 2014).

#### **Requirement To Provide an Enforcement Letter**

Various statutes grant courts the authority to order, or compel them to order, convicted offenders to pay restitution to victims as part of their sentences. Only orders for restitution under 18 U.S.C. 3663A can be enforced against a TSP account.

Judgments ordering restitution often do not reference the statutory authority or statutory mandate under which the court ordered restitution. This leaves the Agency to determine the authority or mandate under which the court ordered restitution. The Agency believes the DOJ is better positioned to determine the authority or mandate under which the court ordered restitution. Therefore, the Agency proposes to amend 5 CFR part 1653 to require an enforcement letter from the DOJ stating that the court ordered restitution under 18 U.S.C. 3663A. The Agency will rely on the DOJ's assertion that the court ordered restitution under 18 U.S.C. 3663A.

#### **Treatment of a Judgment Ordering Restitution Under 18 U.S.C. 3663A as a Final Judgment**

The Agency has received requests from several participants to stay payment from their TSP accounts pending the outcome of an appeal of a judgment ordering restitution under 18 U.S.C. 3663A or the underlying conviction. The Agency's policy is to deny such requests and treat the judgment as a final judgment. This policy is consistent with 18 U.S.C. 3664(o), which says that a sentence that

imposes an order of restitution is a final judgment notwithstanding the fact that it may be corrected, amended, or appealed. The Agency proposes to amend 5 CFR part 1653 to codify this policy.

#### **Technical Corrections**

Paragraph (c)(5) of § 1653.33 provides that the TSP will not honor a criminal restitution order that requires a series of payments. The Agency proposes to amend paragraph (c)(5) to provide that the TSP will not honor a criminal restitution order that requires "the TSP to make" a series of payments. The Agency also proposes to replace certain references to a "restitution order" in 5 CFR part 1653, subpart D with the defined term "criminal restitution order" to avoid any ambiguity with respect to whether the regulations refer to the underlying judgment itself or the documents necessary to enforce the judgment against a TSP account. For consistency, the Agency also proposes to replace certain references to a "levy" with the defined term "tax levy."

#### **Regulatory Flexibility Act**

I certify that this regulation will not have a significant economic impact on a substantial number of small entities. This regulation will affect Federal employees and members of the uniformed services who participate in the Thrift Savings Plan, which is a Federal defined contribution retirement savings plan created under the Federal Employees' Retirement System Act of 1986 (FERSA), Public Law 99-335, 100 Stat. 514, and which is administered by the Agency.

#### **Paperwork Reduction Act**

I certify that these proposed regulations do not require additional reporting under the criteria of the Paperwork Reduction Act.

#### **Unfunded Mandates Reform Act of 1995**

Pursuant to the Unfunded Mandates Reform Act of 1995, 2 U.S.C. 602, 632, 653, 1501-1571, the effects of this regulation on state, local, and tribal governments and the private sector have been assessed. This proposed regulation will not compel the expenditure in any one year of \$100 million or more by state, local, and tribal governments, in the aggregate, or by the private sector. Therefore, a statement under section 1532 is not required.

#### **List of Subjects in 5 CFR Part 1653**

Claims, Government employees, Pensions, Retirement, Taxes.

**Gregory T. Long,**

*Executive Director, Federal Retirement Thrift Investment Board.*

For the reasons stated in the preamble, the Agency proposes to amend 5 CFR chapter VI as follows:

#### **PART 1653—COURT ORDERS AND LEGAL PROCESSES AFFECTING THRIFT SAVINGS PLAN ACCOUNTS**

■ 1. The authority citation for part 1653 continues to read as follows:

**Authority:** 5 U.S.C. 8432d, 8435, 8436(b), 8437(e), 8439(a)(3), 8467, 8474(b)(5), and 8474(c)(1).

■ 2. Amend § 1653.31(b), by revising the definition for "criminal restitution order" and adding a definition for "enforcement letter" in alphabetical order to read as follows:

#### **§ 1653.31 Definitions.**

\* \* \* \* \*

(b) \* \* \*

*Criminal restitution order* means a complete copy of a judgment in a criminal case issued by a federal court ordering restitution for a crime under 18 U.S.C. 3663A.

*Enforcement letter* means a letter received from the Department of Justice requesting a payment from a participant's TSP account to enforce a criminal restitution order.

\* \* \* \* \*

■ 3. Amend § 1653.33 by:

■ a. Revising paragraph (b)(2) and adding paragraph (b)(3),

■ b. Replacing the words "restitution order" wherever they appear not preceded by the word "criminal" with the words "criminal restitution order" in paragraphs (c)(1) and (2); and

■ c. Revising paragraphs (c)(3), (c)(5), and (c)(6).

The revisions read as follows:

#### **§ 1653.33 Qualifying criminal restitution order.**

\* \* \* \* \*

(b) \* \* \*

(2) The criminal restitution order must require the participant to pay a stated dollar amount as restitution.

(3) The criminal restitution order must be accompanied by an enforcement letter that states the restitution is ordered under 18 U.S.C. 3663A. The enforcement letter must expressly refer to the "Thrift Savings Plan" or describe the TSP in such a way that it cannot be confused with other Federal Government retirement benefits or non-Federal retirement benefits.

(c) \* \* \*

(3) A criminal restitution order accompanied by an enforcement letter that requires the TSP to make a payment in the future;

\* \* \* \* \*

(5) A criminal restitution order accompanied by an enforcement letter that requires TSP to make a series of payments;

(6) A criminal restitution order accompanied by an enforcement letter that designates the specific TSP Fund, source of contributions, or balance from which the payment or portions of the payment shall be made.

■ 4. Amend § 1653.34 by revising the last sentence of paragraph (b) introductory text to read as follows:

**§ 1653.34 Processing Federal tax levies and criminal restitution orders.**

\* \* \* \* \*

(b) \* \* \* To be complete, a tax levy or criminal restitution order must meet all the requirements of § 1653.32 or § 1653.33; it must also provide (or be accompanied by a document or enforcement letter that provides):

\* \* \* \* \*

■ 5. Amend § 1653.35, by revising the first sentence of the introductory text and revising paragraph (a) to read as follows:

**§ 1653.35 Calculating entitlement.**

A tax levy or criminal restitution order can only require the payment of a stated dollar amount from the TSP. The payee's entitlement will be the lesser of:

(a) The dollar amount stated in the tax levy or enforcement letter; or

\* \* \* \* \*

■ 6. Amend § 1653.36 by:

■ a. Replacing the word “levy” wherever it appears not preceded by the word “tax” with the words “tax levy” in paragraph (a);

■ b. Replacing the words “restitution order” wherever they appear not preceded by the word “criminal” with the words “criminal restitution order” and by replacing the word “levy” wherever it appears not preceded by the word “tax” with the words “tax levy” in paragraph (c);

■ c. Revising paragraph (d) introductory text;

■ d. Replacing the word “levy” wherever it appears not preceded by the word “tax” with the words “tax levy” in paragraph (g); and

■ e. Adding paragraph (h).

The revisions and additions read as follows:

**§ 1653.36 Payment.**

\* \* \* \* \*

(d) If a participant has funds in more than one type of account, payment will be made from each account in the following order, until the amount required by the tax levy or stated in the enforcement letter is reached:

\* \* \* \* \*

(h) The TSP will not hold a payment pending appeal of a criminal restitution order or the underlying conviction. The TSP will treat the criminal restitution order as a final judgment pursuant to 18 U.S.C. 3664(o) and process payment as provided by this subpart.

[FR Doc. 2015–16868 Filed 7–10–15; 8:45 am]

BILLING CODE 6760–01–P

## DEPARTMENT OF THE TREASURY

### 31 CFR Part 22

#### RIN 1505–AC45

### Nondiscrimination on the Basis of Race, Color, or National Origin in Programs or Activities Receiving Federal Financial Assistance

**AGENCY:** Department of the Treasury.

**ACTION:** Notice of proposed rulemaking.

**SUMMARY:** This proposed regulation provides for the enforcement of Title VI of the Civil Rights Act of 1964, as amended (“Title VI”) to the end that no person in the United States shall on the grounds of race, color, or national origin be denied participation in, be denied the benefits of, or be otherwise subjected to discrimination under any program or activity that receives federal financial assistance from the Department of the Treasury. The promulgation of this proposed regulation will provide guidance to the Department’s recipients of federal financial assistance in complying with the provisions of Title VI and will also promote consistent and appropriate enforcement of Title VI by the Department’s components.

**DATES:** Written comments must be received on or before September 11, 2015.

**ADDRESSES:** Interested persons are invited to submit comments regarding this notice of proposed rulemaking according to the instructions below. All submissions must refer to the document title. The Department encourages the early submission of comments.

*Electronic Submission of Comments:* Interested persons may submit comments electronically through the Federal eRulemaking Portal at <http://www.regulations.gov>. Electronic submission of comments allows the commenter maximum time to prepare

and submit a comment, ensures timely receipt, and enables the Department to make them available to the public. Comments submitted electronically through the <http://www.regulations.gov> Web site can be viewed by other commenters and interested members of the public. Commenters should follow the instructions provided on that site to submit comments electronically.

*Mail:* Send comments to Mariam G. Harvey, Director, Office of Civil Rights and Diversity, 1500 Pennsylvania Avenue NW., Washington, DC 20220; facsimile (202) 622–0367.

**Note:** To receive consideration as public comments, comments must be submitted through a method specified.

#### *Public Inspection of Public*

*Comments:* All properly submitted comments will be available for inspection and downloading at <http://www.regulations.gov>.

*Additional Instructions:* In general comments received, including attachments and other supporting materials, are part of the public record and are available to the public. Do not submit any information in your comment or supporting materials that you consider confidential or inappropriate for public disclosure.

#### **FOR FURTHER INFORMATION CONTACT:**

Mariam G. Harvey, Director, Office of Civil Rights and Diversity, Department of the Treasury, (202) 622–0316 (voice), and (202) 622–7104 (TTY). All responses to this notice should be submitted via <http://www.regulations.gov> or by mail to ensure consideration.

#### **SUPPLEMENTARY INFORMATION:**

##### **I. Background**

The purpose of this proposed rule is to provide for the enforcement of Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d, *et seq.*), as it applies to programs or activities receiving assistance from the Department of the Treasury. Specifically, the statute states that “[n]o person in the United States shall, on the grounds of race, color, or national origin be denied participation in, be denied the benefits of, or be otherwise subjected to discrimination under any program or activity that receives federal financial assistance.” 42 U.S.C. 2000d. Each federal agency subject to Title VI is required to issue regulations implementing Title VI. 28 CFR 42.403. The Department of the Treasury will be issuing Title VI regulations for the first time. The Department proposes regulations as Title VI of the Civil Rights Act of 1964, as amended, 42 U.S.C. 2000d to 2000d-7 (“Title VI”), requires.



Title VI prohibits discrimination on the basis of race, color, and national origin in all programs or activities that receive federal financial assistance. Under Treasury's proposed Title VI implementing regulations, Treasury-funded programs are prohibited from taking acts, including permitting actions, that discriminate based on the statutorily protected classes. These proposed regulations further provide for Treasury procedures to ensure compliance, including a hearing procedure.

## II. Applicable Executive Orders and Regulatory Certifications

### *Executive Order 12866*

Executive Orders 13563 and 12866 direct agencies to assess costs and benefits of available regulatory alternatives and, if regulation is necessary, to select regulatory approaches that maximize net benefits (including potential economic, environmental, public health and safety effects, distributive impacts, and equity). Executive Order 13563 emphasizes the importance of quantifying both costs and benefits, of reducing costs, of harmonizing rules, and of promoting flexibility. This proposed rule has been designated a "significant regulatory action" although not economically significant, under section 3(f) of Executive Order 12866. Accordingly, this proposed rule has been reviewed by the Office of Management and Budget.

### *Unfunded Mandates Reform Act of 1995*

The Department certifies that no actions were deemed necessary under the Unfunded Mandates Reform Act of 1995. Furthermore, these proposed

regulations will not result in the expenditure by State, local, and tribal governments, in the aggregate, or by the private sector, of \$100,000,000 or more in any one year, and they will not significantly or uniquely affect small governments.

### *The Regulatory Flexibility Act*

The Department, in accordance with the Regulatory Flexibility Act, 5 U.S.C. 605(b), has reviewed these Title VI regulations and by approving, certifies that these regulations will not have a significant economic impact on a substantial number of small entities because all of the entities that are subject to these regulations are already subject to Title VI, and some entities already are subject to the Title VI regulations of other agencies.

This proposed rule, if adopted, is not a "major rule," nor will it have a significant economic impact on a substantial number of small entities, in large part because these regulations do not impose any new substantive obligations on federal funding recipients. All recipients of federal funding have been bound by Title VI's antidiscrimination provision since 1964. Individual participants in the recipients' programs have thus long had the right to be free from discrimination on the basis of race, color, and national origin. This rule merely ensures that the Department and its components have regulations implementing this statute.

### *Executive Order 13132*

These Title VI regulations will not have substantial direct effects on the states, on the relationship between the national government and the States, or on the distribution of power and responsibilities among the various

levels of government. These Title VI regulations do not subject recipients of federal funding to any new substantive obligations because all recipients of federal funding have been bound by Title VI's antidiscrimination provision since 1964. Moreover, these Title VI regulations are required by statute; Congress specifically directed federal agencies to adopt implementing regulations when Title VI was enacted. Therefore, in accordance with section 6 of Executive Order 13132, the Department has determined that this rule does not have sufficient federalism implications to warrant the preparation of a federalism summary impact statement. No further action is required.

### *Executive Order 12250*

The Attorney General has reviewed and approved this proposed rule pursuant to Executive Order 12250.

### *Paperwork Reduction Act*

Under the Paperwork Reduction Act (44 U.S.C. chapter 35), an agency may not conduct or sponsor and a person is not required to respond to a collection of information unless it displays a valid control number issued by the Office of Management and Budget (OMB). The information collections contained in this proposed rule will be submitted and approved by OMB in connection with information collections for the applicable programs listed in appendix A to the regulations.

The information collections contained in this proposed rule are found in §§ 22.5 (reporting), 22.6 (reporting and recordkeeping), 22.7 (reporting), and 22.10 (reporting).

The OMB control numbers that will be revised include the following:

Bureau/Office	Program or activity	OMB Control Nos.
Departmental Offices, Office of Domestic Finance, Office of Financial Institutions.	Community Development Financial Institutions (CDFI) Fund—Financial Component.	1559–0021
Departmental Offices, Office of Domestic Finance, Office of Financial Institutions.	Community Development Financial Institutions (CDFI) Fund—Technical Assistance Component.	1559–0021
Departmental Offices, Office of Domestic Finance, Office of Financial Institutions.	Bank Enterprise Award Program .....	1559–0032, 1559–0005
Departmental Offices, Office of Domestic Finance, Office of Financial Institutions.	Native American Community Development Financial Institutions (CDFI) Assistance Program, Financial Assistance (FA) Awards.	1559–0021
Departmental Offices, Office of Domestic Finance, Office of Financial Institutions.	Native American Community Development Financial Institutions (CDFI) Assistance (NACA) Program, Technical Assistance Grants.	1559–0021
Departmental Offices, Office of Domestic Finance, Office of Financial Institutions.	Community Development Financial Institutions Fund, Capital Magnet Fund.	1559–0043
Departmental Offices, Office of Domestic Finance, Office of Small Business, Community Development, and Housing Policy.	State Small Business Credit Initiative .....	1505–0227
Internal Revenue Service .....	Tax Counseling for the Elderly Grant Program .....	1545–2222
Internal Revenue Service .....	Volunteer Income Tax Assistance Program .....	1545–2222
Internal Revenue Service .....	Volunteer Income Tax Assistance Grant Program .....	1545–2222
Internal Revenue Service .....	Low Income Taxpayer Clinic Grant Program .....	1545–1648
United States Mint .....	U.S. Commemorative Coin Programs .....	TBD

Bureau/Office	Program or activity	OMB Control Nos.
Departmental Offices, Treasury Executive Office for Asset Forfeiture.	Equitable sharing program (transfer of forfeited property to state and local law enforcement agencies).	1505–0152
Departmental Offices, Office of the Fiscal Assistant Secretary.	Grants under the RESTORE Act's Direct Component and Centers of Excellence program.	1505–0250

Comments on the collection of information should be sent to the Office of Management and Budget, Attention: Desk Officer for the Department of Treasury, Office of Information and Regulatory Affairs, Washington, DC 20503, or email to *OIRA\_Submission@OMB.EOP.gov* with copies to the Department of Treasury at the addresses specified in the **ADDRESSES** section. Comments on the information collection should be submitted no later than September 11, 2015. Comments are specifically requested concerning:

1. Whether the proposed information collection is necessary for the proper performance of agency functions, including whether the information will have practical utility;
2. The accuracy of the estimated burden associated with the proposed collection of information, including the validity of the methodology and assumptions used (see below);
3. How to enhance the quality, utility, and clarity of the information required to be maintained; and
4. How to minimize the burden of complying with the proposed information collection, including the application of automated collection techniques or other forms of information technology.

#### List of Subjects in 31 CFR Part 22

Civil rights, Reporting and recordkeeping requirements.

For the reasons discussed in the preamble, the Department proposes to amend 31 CFR by adding part 22 to read as follows:

#### **PART 22—NONDISCRIMINATION ON THE BASIS OF RACE, COLOR, OR NATIONAL ORIGIN IN PROGRAMS OR ACTIVITIES RECEIVING FEDERAL FINANCIAL ASSISTANCE FROM THE DEPARTMENT OF THE TREASURY**

Sec.

- 22.1 Purpose.
- 22.2 Application.
- 22.3 Definitions.
- 22.4 Discrimination prohibited.
- 22.5 Assurances required.
- 22.6 Compliance information.
- 22.7 Conduct of investigations.
- 22.8 Procedure for effecting compliance.
- 22.9 Hearings.
- 22.10 Decisions and notices.
- 22.11 Judicial review.
- 22.12 Effect on other regulations, forms, and instructions.

#### Appendix A to Part 22—Activities to Which This Part Applies

**Authority:** 42 U.S.C. 2000d-2000d-7.

##### **§ 22.1 Purpose.**

The purpose of this part is to effectuate the provisions of Title VI of the Civil Rights Act of 1964 (Title VI) to the end that no person in the United States shall, on the grounds of race, color, or national origin, be excluded from participation in, be denied the benefits of, or be otherwise subjected to discrimination under any program or activity receiving federal financial assistance from the Department of the Treasury.

##### **§ 22.2 Application.**

(a) This part applies to any program for which federal financial assistance is authorized under a law administered by the Department, including the types of federal financial assistance listed in Appendix A to this part. It also applies to money paid, property transferred, or other federal financial assistance extended after the effective date of this part pursuant to an application approved before that effective date. This part does not apply to:

- (1) Any federal financial assistance by way of insurance or guaranty contracts;
- (2) Any assistance to any individual who is the ultimate beneficiary; or
- (3) Any employment practice, under any such program, of any employer, employment agency, or labor organization, except to the extent described in § 22.4(c). The fact that a type of federal financial assistance is not listed in Appendix A to this part shall not mean, if Title VI is otherwise applicable, that a program is not covered. Other types of federal financial assistance under statutes now in force or hereinafter enacted may be added to appendix A to this part.

(b) In any program receiving federal financial assistance in the form, or for the acquisition, of real property or an interest in real property, to the extent that rights to space on, over, or under any such property are included as part of the program receiving that assistance, the nondiscrimination requirement of this part shall extend to any facility located wholly or in part in that space.

##### **§ 22.3 Definitions.**

As used in this part:

*Applicant* means a person who submits an application, request, or plan required to be approved by an official of the Department of the Treasury, or designee thereof, or by a primary recipient, as a condition to eligibility for federal financial assistance, and *application* means such an application, request, or plan.

*Designated agency official* means the Assistant Secretary for Management and his or her designee.

*Facility* includes all or any part of structures, equipment, or other real or personal property or interests therein, and the provision of facilities includes the construction, expansion, renovation, remodeling, alteration, or acquisition of facilities.

*Federal financial assistance* includes:

- (1) Grants and loans of federal funds;
- (2) The grant or donation of federal property and interests in property;
- (3) The detail of federal personnel;
- (4) The sale and lease of, and the permission to use (on other than a casual or transient basis), federal property or any interest in such property without consideration or at a nominal consideration, or at a consideration which is reduced for the purpose of assisting the recipient, or in recognition of the public interest to be served by such sale or lease to the recipient; and
- (5) Any federal agreement, arrangement, or other contract which has as one of its purposes the provision of assistance.

*Primary recipient* means any recipient that is authorized or required to extend federal financial assistance to another recipient.

*Program or activity* and *program* mean all of the operations of any entity described in the following paragraphs (1) through (4) of this definition, any part of which is extended federal financial assistance:

(1)(i) A department, agency, special purpose district, or other instrumentality of a State or of a local government; or

(ii) The entity of such state or local government that distributes such assistance and each such department or agency to which the assistance is extended, in the case of assistance to a State or local government;

(2)(i) A college, university, or other postsecondary institution, or a public system of higher education; or

(ii) A local educational agency (as defined in 20 U.S.C. 7801), system of vocational education, or other school system;

(3)(i) An entire corporation, partnership, or other private organization, or an entire sole proprietorship—

(A) If assistance is extended to such corporation, partnership, private organization, or sole proprietorship as a whole; or

(B) Which is principally engaged in the business of providing education, health care, housing, social services, or parks and recreation; or

(ii) The entire plant or other comparable, geographically separate facility to which federal financial assistance is extended, in the case of any other corporation, partnership, private organization or sole proprietorship; or

(4) Any other entity which is established by two or more of the entities described in the preceding paragraphs (1), (2), or (3) of this definition.

*Recipient* may mean any State, territory, possession, the District of Columbia, or Puerto Rico, or any political subdivision thereof, or instrumentality thereof, any public or private agency, institution, or organization, or other entity, or any individual, in any State, territory, possession, the District of Columbia, or Puerto Rico, to whom federal financial assistance is extended, directly or through another recipient, including any successor, assignee, or transferee thereof, but such term does not include any ultimate beneficiary.

#### **§ 22.4 Discrimination prohibited.**

(a) *General.* No person in the United States shall, on the grounds of race, color, or national origin be excluded from participation in, be denied the benefits of, or be otherwise subjected to discrimination under, any program to which this part applies.

(b) *Specific discriminatory actions prohibited.* (1) A recipient to which this part applies may not, directly or through contractual or other arrangements, on the grounds of race, color, or national origin:

(i) Deny a person any service, financial aid, or other benefit provided under the program;

(ii) Provide any service, financial aid, or other benefit to a person which is different, or is provided in a different manner, from that provided to others under the program;

(iii) Subject a person to segregation or separate treatment in any matter related to his receipt of any service, financial aid, or other benefit under the program;

(iv) Restrict a person in any way in the enjoyment of any advantage or privilege enjoyed by others receiving any service, financial aid, or other benefit under the program;

(v) Treat a person differently from others in determining whether he satisfies any admission, enrollment, quota, eligibility, membership, or other requirement or condition which persons must meet in order to be provided any service, financial aid, or other benefit provided under the program;

(vi) Deny a person an opportunity to participate in the program through the provision of services or otherwise to afford him an opportunity to do so which is different from that afforded others under the program (including the opportunity to participate in the program as a volunteer or as an employee, but only to the extent set forth in paragraph (c) of this section); or

(vii) Deny a person the opportunity to participate as a member of a planning, advisory, or similar body which is an integral part of the program.

(2) A recipient, in determining the types of services, financial aid, or other benefits, or facilities which will be provided under any such program, or the class of persons to whom, or the situations in which, such services, financial aid, other benefits, or facilities will be provided under any such program, or the class of persons to be afforded an opportunity to participate in any such program, may not, directly or through contractual or other arrangements, use criteria or methods of administration which have the effect of subjecting persons to discrimination because of their race, color, or national origin or have the effect of defeating or substantially impairing accomplishment of the objectives of the program with respect to individuals of a particular race, color, or national origin.

(3) In determining the site or location of facilities, a recipient or applicant may not make selections with the purpose or effect of excluding persons from, denying them the benefits of, or subjecting them to discrimination under any program to which this regulation applies, on the grounds of race, color, or national origin; or with the purpose or effect of defeating or substantially impairing the accomplishment of the objectives of Title VI or this part.

(4) As used in this section the services, financial aid, or other benefits provided under a program receiving federal financial assistance include any service, financial aid, or other benefit

provided in or through a facility provided with the aid of federal financial assistance.

(5) The enumeration of specific forms of prohibited discrimination in this paragraph does not limit the generality of the prohibition in paragraph (a) of this section.

(6) This part does not prohibit the consideration of race, color, or national origin if the purpose and effect are to remove or overcome the consequences of practices or impediments which have restricted the availability of, or participation in, the program or activity receiving federal financial assistance, on the grounds of race, color, or national origin. Where prior discriminatory practice or usage tends, on the grounds of race, color, or national origin to exclude individuals from participation in, to deny them the benefits of, or to subject them to discrimination under any program or activity to which this part applies, the applicant or recipient must take affirmative action to remove or overcome the effects of the prior discriminatory practice or usage. Even in the absence of prior discriminatory practice or usage, a recipient in administering a program or activity to which this part applies, may take affirmative action to assure that no person is excluded from participation in or denied the benefits of the program or activity on the grounds of race, color, or national origin.

(c) *Employment practices.* (1) Where a primary objective of the federal financial assistance to a program to which this part applies is to provide employment, a recipient subject to this part shall not, directly or through contractual or other arrangements, subject a person to discrimination on the ground of race, color, or national origin in its employment practices under such program (including recruitment or recruitment advertising, hiring, firing, upgrading, promotion, demotion, transfer, layoff, termination, rates of pay or other forms of compensation or benefits, selection for training or apprenticeship, and use of facilities). Such recipient shall take affirmative action to insure that applicants are employed, and employees are treated during employment, without regard to their race, color, or national origin. The requirements applicable to construction employment under any such program shall be those specified in or pursuant to Part III of Executive Order 11246 or any Executive Order which supersedes it.

(2) Where a primary objective of the federal financial assistance is not to provide employment, but

discrimination on the grounds of race, color, or national origin in the employment practices of the recipient or other persons subject to the regulation tends, on the grounds of race, color, or national origin, to exclude individuals from participation in, deny them the benefits of, or subject them to discrimination under any program to which this regulation applies, the provisions of paragraph (c)(1) of this section shall apply to the employment practices of the recipient or other persons subject to the regulation, to the extent necessary to assure equality of opportunity to, and nondiscriminatory treatment of, beneficiaries.

#### **§ 22.5 Assurances required.**

(a) *General.* Either at the application stage or the award stage, federal agencies must ensure that applications for federal financial assistance or awards of federal financial assistance contain, be accompanied by, or be covered by a specifically identified assurance from the applicant or recipient, satisfactory to the designated agency official, that each program or activity operated by the applicant or recipient and to which these Title VI regulations apply will be operated in compliance with these Title VI regulations.

(b) *Duration of obligation.* (1) In the case where the federal financial assistance is to provide or is in the form of personal property, or real property or interest therein or structures thereon, the assurance shall obligate the recipient, or, in the case of a subsequent transfer, the transferee, for the period during which the property is used for a purpose for which the federal financial assistance is extended or for another purpose involving the provision of similar services or benefits, or for as long as the recipient retains ownership or possession of the property, whichever is longer. In all other cases the assurance shall obligate the recipient for the period during which federal financial assistance is extended to the program.

(2) In the case where federal financial assistance is provided in the form of a transfer of real property, structures, or improvements thereon, or interest therein, from the federal Government, the instrument effecting or recording the transfer shall contain a covenant running with the land assuring nondiscrimination for the period during which the real property is used for a purpose for which the federal financial assistance is extended or for another purpose involving the provision of similar services or benefits. Where no transfer of property or interest therein

from the federal government is involved, but property is acquired or improved with federal financial assistance, the recipient shall agree to include such covenant in any subsequent transfer of such property. When the property is obtained from the federal government, such covenant may also include a condition coupled with a right to be reserved by the Department to revert title to the property in the event of a breach of the covenant where, in the discretion of the designated agency official, such a condition and right of reverter is appropriate to the statute under which the real property is obtained and to the nature of the grant and the grantee. In such event if a transferee of real property proposes to mortgage or otherwise encumber the real property as security for financing construction of new, or improvement of existing, facilities on such property for the purposes for which the property was transferred, the designated agency official may agree, upon request of the transferee and if necessary to accomplish such financing, and upon such conditions as the designated agency official deems appropriate, to subordinate such right of reversion to the lien of such mortgage or other encumbrance.

(c) *Continuing federal financial assistance.* Every application by a State or a State agency for continuing federal financial assistance to which this part applies (including the types of federal financial assistance listed in appendix A to this part) shall as a condition to its approval and the extension of any federal financial assistance pursuant to the application:

(1) Contain, be accompanied by, or be covered by a statement that the program is (or, in the case of a new program, will be) conducted in compliance with all requirements imposed by or pursuant to this part; and

(2) Provide, be accompanied by, or be covered by provision for such methods of administration for the program as are found by the designated agency official to give reasonable guarantee that the applicant and all recipients of federal financial assistance under such program will comply with all requirements imposed by or pursuant to this part.

(d) *Assurance from institutions.* (1) In the case of any application for federal financial assistance to an institution of higher education (including assistance for construction, for research, for special training projects, for student loans or for any other purpose), the assurance required by this section shall extend to admission practices and to all other practices relating to the treatment of students.

(2) The assurance required with respect to an institution of higher education, hospital, or any other institution, insofar as the assurance relates to the institution's practices with respect to admission or other treatment of individuals as students, patients, or clients of the institution or to the opportunity to participate in the provision of services or other benefits to such individuals, shall be applicable to the entire institution.

(e) *Form.* (1) The assurances required by paragraph (a) of this section, which may be included as part of a document that addresses other assurances or obligations, shall include that the applicant or recipient will comply with all applicable federal statutes relating to nondiscrimination. This includes but is not limited to Title VI of the Civil Rights Act of 1964, as amended, 42 U.S.C. 2000d, *et seq.*

(2) The designated agency official will specify the extent to which such assurances will be required of the applicant's or recipient's subgrantees, contractors, subcontractors, transferees, or successors in interest. Any such assurance shall include provisions which give the United States a right to seek its judicial enforcement.

#### **§ 22.6 Compliance information.**

(a) *Cooperation and assistance.* The designated Agency official shall to the fullest extent practicable seek the cooperation of recipients in obtaining compliance with this part and shall provide assistance and guidance to recipients to help them comply voluntarily with this part.

(b) *Compliance reports.* Each recipient shall keep such records and submit to the designated Agency official timely, complete, and accurate compliance reports at such times, and in such form and containing such information, as the designated Agency official may determine to be necessary to enable the designated Agency official to ascertain whether the recipient has complied or is complying with this part. In the case in which a primary recipient extends federal financial assistance to any other recipient, such other recipient shall also submit such compliance reports to the primary recipient as may be necessary to enable the primary recipient to carry out its obligations under this part. In general recipients should have available for the designated Agency official racial and ethnic data showing the extent to which members of minority groups are beneficiaries of programs receiving federal financial assistance.

(c) *Access to sources of information.* Each recipient shall permit access by the designated Agency official during

normal business hours to such of its books, records, accounts, and other sources of information, and its facilities as may be pertinent to ascertain compliance with this part. Where any information required of a recipient is in the exclusive possession of any other agency, institution, or person and this agency, institution, or person fails or refuses to furnish this information, the recipient shall so certify in its report and shall set forth what efforts it has made to obtain the information.

(d) *Information to beneficiaries and participants.* Each recipient shall make available to participants, beneficiaries, and other interested persons such information regarding the provisions of this part and its applicability to the program for which the recipient receives federal financial assistance, and make such information available to them in such manner, as the designated Agency official finds necessary to apprise such persons of the protections against discrimination assured them by Title VI and this part.

#### **§ 22.7 Conduct of investigations.**

(a) *Periodic compliance reviews.* The designated Agency official shall from time to time review the practices of recipients to determine whether they are complying with this part.

(b) *Complaints.* Any person who believes that he or she, or any specific class of persons, has been subjected to discrimination prohibited by this part may by himself or herself, or by a representative, file with the designated Agency official a written complaint. A complaint must be filed not later than 180 days after the date of the alleged discrimination, unless the time for filing is extended by the designated Agency official.

(c) *Investigations.* The designated Agency official will make a prompt investigation whenever a compliance review, report, complaint, or any other information indicates a possible failure to comply with this part. The investigation will include, where appropriate, a review of the pertinent practices and policies of the recipient, the circumstances under which the possible noncompliance with this part occurred, and other factors relevant to a determination as to whether the recipient has failed to comply with this part.

(d) *Resolution of matters.* (1) If an investigation pursuant to paragraph (c) of this section indicates a failure to comply with this part, the designated Agency official will so inform the recipient and the matter will be resolved by informal means whenever possible. If it has been determined that the matter

cannot be resolved by informal means, action will be taken as provided for in § 22.8.

(2) If an investigation does not warrant action pursuant to paragraph (d)(1) of this section the designated Agency official will so inform the recipient and the complainant, if any, in writing.

(e) *Intimidatory or retaliatory acts prohibited.* No recipient or other person shall intimidate, threaten, coerce, or discriminate against any individual for the purpose of interfering with any right or privilege secured by section 601 of Title VI or this part, or because the individual has made a complaint, testified, assisted, or participated in any manner in an investigation, proceeding, or hearing under this part. The identity of complainants shall be kept confidential except to the extent necessary to carry out the purposes of this part, including the conduct of any investigation, hearing, or judicial proceeding arising thereunder.

#### **§ 22.8 Procedure for effecting compliance.**

(a) *General.* If there appears to be a failure or threatened failure to comply with this part, and if the noncompliance or threatened noncompliance cannot be corrected by informal means, compliance with this part may be effected by the suspension or termination of or refusal to grant or to continue federal financial assistance or by any other means authorized by law. Such other means may include, but are not limited to:

(1) A referral to the Department of Justice with a recommendation that appropriate proceedings be brought to enforce any rights of the United States under any law of the United States (including other titles of the Civil Rights Act of 1964), or any assurance or other contractual undertaking; and

(2) Any applicable proceeding under State or local law.

(b) *Noncompliance with § 22.5.* If an applicant fails or refuses to furnish an assurance required under § 22.5 or otherwise fails or refuses to comply with a requirement imposed by or pursuant to that section, federal financial assistance may be suspended, terminated, or refused in accordance with the procedures of paragraph (c) of this section. The Agency shall not be required to provide assistance in such a case during the pendency of the administrative proceedings under such paragraph. However, subject to § 22.12, the Agency shall continue assistance during the pendency of such proceedings where such assistance is due and payable pursuant to an

application approved prior to the effective date of this part.

(c) *Termination of or refusal to grant or to continue federal financial assistance.* (1) No order suspending, terminating, or refusing to grant or to continue federal financial assistance shall become effective until:

(i) The designated Agency official has advised the applicant or recipient of the applicant's or recipient's failure to comply and has determined that compliance cannot be secured by voluntary means;

(ii) There has been an express finding on the record, after opportunity for hearing, of a failure by the applicant or recipient to comply with a requirement imposed by or pursuant to this part;

(iii) The action has been approved by the designated Agency official pursuant to § 22.10(e); and

(iv) The expiration of 30 days after the designated Agency official has filed with the committee of the House and the committee of the Senate having legislative jurisdiction over the program involved, a full written report of the circumstances and the grounds for such action.

(2) Any action to suspend or terminate or to refuse to grant or to continue federal financial assistance shall be limited to the particular political entity, or part thereof, or other applicant or recipient as to whom such a finding has been made and shall be limited in its effect to the particular program, or part thereof, in which such noncompliance has been so found.

(d) *Other means authorized by law.*

No action to effect compliance with Title VI by any other means authorized by law shall be taken by the Department of the Treasury until:

(1) The designated Agency official has determined that compliance cannot be secured by voluntary means;

(2) The recipient or other person has been notified of its failure to comply and of the action to be taken to effect compliance; and

(3) The expiration of at least 10 days from the mailing of such notice to the recipient or other person. During this period of at least 10 days, additional efforts shall be made to persuade the recipient or other person to comply with the regulation and to take such corrective action as may be appropriate.

#### **§ 22.9 Hearings.**

(a) *Opportunity for hearing.* Whenever an opportunity for a hearing is required by § 22.8(c), reasonable notice shall be given by registered or certified mail, return receipt requested, to the affected applicant or recipient. This notice shall advise the applicant or recipient of the

action proposed to be taken, the specific provision under which the proposed action against it is to be taken, and the matters of fact or law asserted as the basis for this action, and either:

(1) Fix a date not less than 20 days after the date of such notice within which the applicant or recipient may request of the designated agency official that the matter be scheduled for hearing; or

(2) Advise the applicant or recipient that the matter in question has been set for hearing at a stated place and time. The time and place so fixed shall be reasonable and shall be subject to change for cause. The complainant, if any, shall be advised of the time and place of the hearing. An applicant or recipient may waive a hearing and submit written information and argument for the record. The failure of an applicant or recipient to request a hearing under this paragraph or to appear at a hearing for which a date has been set shall be deemed to be a waiver of the right to a hearing under section 602 of Title VI and § 22.8(c) and consent to the making of a decision on the basis of such information as is available.

(b) *Time and place of hearing.* Hearings shall be held at the offices of the Department of the Treasury component administering the program, at a time fixed by the designated Agency official unless the designated Agency official determines that the convenience of the applicant or recipient or of the Agency requires that another place be selected. Hearings shall be held before the designated Agency official, or at designated Agency official's discretion, before a hearing examiner appointed in accordance with section 3105 of title 5, United States Code, or detailed under section 3344 of title 5, United States Code.

(c) *Right to counsel.* In all proceedings under this section, the applicant or recipient and the Agency shall have the right to be represented by counsel.

(d) *Procedures, evidence, and record.*

(1) The hearing, decision, and any administrative review thereof shall be conducted in conformity with sections 554 through 557 of title 5, United States Code, and in accordance with such rules of procedure as are proper (and not inconsistent with this section) relating to the conduct of the hearing, giving of notices subsequent to those provided for in paragraph (a) of this section, taking of testimony, exhibits, arguments and briefs, requests for findings, and other related matters. Both the designated Agency official and the applicant or recipient shall be entitled to introduce all relevant evidence on the issues as stated in the notice for hearing or as

determined by the officer conducting the hearing at the outset of or during the hearing.

(2) Technical rules of evidence do not apply to hearings conducted pursuant to this part, but rules or principles designed to assure production of the most credible evidence available and to subject testimony to test by cross-examination shall be applied where determined reasonably necessary by the officer conducting the hearing. The hearing officer may exclude irrelevant, immaterial, or unduly repetitious evidence. All documents and other evidence offered or taken for the record shall be open to examination by the parties and opportunity shall be given to refute facts and arguments advanced on either side of the issues. A transcript shall be made of the oral evidence except to the extent the substance thereof is stipulated for the record. All decisions shall be based upon the hearing record and written findings shall be made.

(e) *Consolidated or joint hearings.* In cases in which the same or related facts are asserted to constitute noncompliance with this part with respect to two or more federal statutes, authorities, or other means by which federal financial assistance is extended and to which this part applies, or noncompliance with this part and the regulations of one or more other federal departments or agencies issued under Title VI, the designated Agency official may, by agreement with such other departments or agencies, where applicable, provide for the conduct of consolidated or joint hearings, and for the application to such hearings of rules or procedures not inconsistent with this part. Final decisions in such cases, insofar as this regulation is concerned, shall be made in accordance with § 22.10.

#### **§ 22.10 Decisions and notices.**

(a) *Procedure on decisions by hearing examiner.* If the hearing is held by a hearing examiner, the hearing examiner shall either make an initial decision, if so authorized, or certify the entire record including his recommended findings and proposed decision to the designated agency official for a final decision, and a copy of such initial decision or certification shall be mailed to the applicant or recipient. Where the initial decision is made by the hearing examiner the applicant or recipient may, within 30 days after the mailing of such notice of initial decision, file with the designated Agency official the applicant's or recipient's exceptions to the initial decision, with the reasons therefor. In the absence of exceptions,

the designated Agency official may, on his or her own motion, within 45 days after the initial decision, serve on the applicant or recipient a notice that the designated Agency official will review the decision. Upon the filing of such exceptions or of notice of review, the designated Agency official shall review the initial decision and issue his or her own decision thereon including the reasons therefor. In the absence of either exceptions or a notice of review the initial decision shall, subject to paragraph (e) of this section, constitute the final decision of the designated Agency official.

(b) *Decisions on record or review by the designated Agency official.* Whenever a record is certified to the designated Agency official for decision or he or she reviews the decision of a hearing examiner pursuant to paragraph (a) of this section, or whenever the designated Agency official conducts the hearing, the applicant or recipient shall be given reasonable opportunity to file with the designated Agency official briefs or other written statements of its contentions, and a written copy of the final decision of the designated Agency official shall be sent to the applicant or recipient and to the complainant, if any.

(c) *Decisions on record where a hearing is waived.* Whenever a hearing is waived pursuant to § 22.9, a decision shall be made by the designated Agency official on the record and a written copy of such decision shall be sent to the applicant or recipient, and to the complainant, if any.

(d) *Rulings required.* Each decision of a hearing examiner or the designated Agency official shall set forth his or her ruling on each finding, conclusion, or exception presented, and shall identify the requirement or requirements imposed by or pursuant to this part with which it is found that the applicant or recipient has failed to comply.

(e) *Approval by designated Agency official.* Any final decision by an official of the Agency, other than the designated Agency official personally, which provides for the suspension or termination of, or the refusal to grant or continue federal financial assistance, or the imposition of any other sanction available under this part or Title VI, shall promptly be transmitted to the designated Agency official personally, who may approve such decision, may vacate it, or remit or mitigate any sanction imposed.

(f) *Content of orders.* The final decision may provide for suspension or termination of, or refusal to grant or continue federal financial assistance, in whole or in part, to which this regulation applies, and may contain

such terms, conditions, and other provisions as are consistent with and will effectuate the purposes of Title VI and this part, including provisions designed to assure that no federal financial assistance to which this regulation applies will thereafter be extended to the applicant or recipient determined by such decision to be in default in its performance of an assurance given by it pursuant to this part, or to have otherwise failed to comply with this part, unless and until it corrects its noncompliance and satisfies the designated Agency official that it will fully comply with this part.

(g) *Post termination proceedings.* (1) An applicant or recipient adversely affected by an order issued under paragraph (f) of this section shall be restored to full eligibility to receive federal financial assistance if it satisfies the terms and conditions of that order for such eligibility or if it brings itself into compliance with this part and provides reasonable assurance that it will fully comply with this part.

(2) Any applicant or recipient adversely affected by an order entered pursuant to paragraph (f) of this section may at any time request the designated Agency official to restore fully its eligibility to receive federal financial assistance. Any such request shall be supported by information showing that the applicant or recipient has met the requirements of paragraph (g)(1) of this section. If the designated Agency official determines that those requirements have been satisfied, he or she shall restore such eligibility.

(3) If the designated Agency official denies any such request, the applicant or recipient may submit a request for a hearing in writing, specifying why it believes such official to have been in error. It shall thereupon be given an expeditious hearing, with a decision on the record in accordance with rules or

procedures issued by the designated Agency official. The applicant or recipient will be restored to such eligibility if it proves at such a hearing that it satisfied the requirements of paragraph (g)(1) of this section. While proceedings under this paragraph are pending, the sanctions imposed by the order issued under paragraph (f) of this section shall remain in effect.

#### **§ 22.11 Judicial review.**

Action taken pursuant to section 602 of the Title VI is subject to judicial review as provided in section 603 of the Title VI.

#### **§ 22.12 Effect on other regulations, forms, and instructions.**

(a) *Effect on other regulations.* All regulations, orders, or like directions issued before the effective date of this part by any officer of the Department of the Treasury which impose requirements designed to prohibit any discrimination against individuals on the grounds of race, color, or national origin under any program to which this part applies, and which authorize the suspension or termination of or refusal to grant or to continue federal financial assistance to any applicant for a recipient of such assistance for failure to comply with such requirements, are hereby superseded to the extent that such discrimination is prohibited by this part, except that nothing in this part may be considered to relieve any person of any obligation assumed or imposed under any such superseded regulation, order, instruction, or like direction before the effective date of this part. Nothing in this part, however, supersedes any of the following (including future amendments thereof):

(1) Executive Order 11246 (3 CFR, 1965 Supp., p. 167) and regulations issued thereunder; or

(2) Any other orders, regulations, or instructions, insofar as such orders,

regulations, or instructions prohibit discrimination on the ground of race, color, or national origin in any program or situation to which this part is inapplicable, or prohibit discrimination on any other ground.

(b) *Forms and instructions.* The designated Agency official shall issue and promptly make available to all interested persons forms and detailed instructions and procedures for effectuating this part as applied to programs to which this part applies and for which the designated Agency official is responsible.

(c) *Supervision and coordination.* The designated Agency official may from time to time assign to officials of the Agency, or to officials of other departments or agencies of the Government with the consent of such departments or agencies, responsibilities in connection with the effectuation of the purposes of Title VI and this part (other than responsibility for final decision as provided in § 22.10), including the achievement of effective coordination and maximum uniformity within the Agency and within the Executive Branch of the Government in the application of Title VI and this part to similar programs and in similar situations. Any action taken, determination made or requirement imposed by an official of another department or agency acting pursuant to an assignment of responsibility under this paragraph shall have the same effect as though such action had been taken by the designated Agency official of the Department.

#### **Appendix A to Part 22—Activities to Which This Part Applies**

**Note:** Failure to list a type of federal assistance in this appendix A shall not mean, if Title VI is otherwise applicable, that a program is not covered.

Component	Program or activity	Authority
Departmental Offices, Office of Domestic Finance, Office of Financial Institutions.	Community Development Financial Institutions Fund—Financial Component.	Riegle Community Development and Regulatory Improvement Act of 1994, 12 U.S.C. 4701 <i>et seq.</i>
Departmental Offices, Office of Domestic Finance, Office of Financial Institutions.	Community Development Financial Institutions Fund—Technical Assistance Component.	Riegle Community Development and Regulatory Improvement Act of 1994, 12 U.S.C. 4701 <i>et seq.</i>
Departmental Offices, Office of Domestic Finance, Office of Financial Institutions.	Bank Enterprise Award Program .....	Riegle Community Development and Regulatory Improvement Act of 1994 sec. 114, 12 U.S.C. 4713.
Departmental Offices, Office of Domestic Finance, Office of Financial Institutions.	Native American Community Development Financial Institutions Assistance Program, Financial Assistance (FA) Awards.	Riegle Community Development Banking and Financial Institutions Act of 1994, 12 U.S.C. 4701 <i>et seq.</i>
Departmental Offices, Office of Domestic Finance, Office of Financial Institutions.	Native American Community Development Financial Institutions Assistance (NACA) Program, Technical Assistance Grants.	Riegle Community Development Banking and Financial Institutions Act of 1994, 12 U.S.C. 4701 <i>et seq.</i>
Departmental Offices, Office of Domestic Finance, Office of Financial Institutions.	Community Development Financial Institutions Fund, Capital Magnet Fund.	Housing and Economic Recovery Act of 2008 sec. 1339, 12 U.S.C. 4569.

Component	Program or activity	Authority
Departmental Offices, Office of Domestic Finance, Office of Small Business, Community Development, and Housing Policy. Internal Revenue Service .....	State Small Business Credit Initiative .....	Small Business Jobs Act of 2010, 12 U.S.C. 5701 <i>et seq.</i>
Internal Revenue Service .....	Tax Counseling for the Elderly Grant Program	Revenue Act of 1978 sec. 163, Pub. L. 95–600, 92 Stat 2763, 2810–2811.
Internal Revenue Service .....	Volunteer Income Tax Assistance Program ....	Tax Reform Act of 1969, Pub. L. 91–172, 83 Stat. 487.
Internal Revenue Service .....	Volunteer Income Tax Assistance Grant Program.	Consolidated Appropriations Act, Pub. L. 110–161, 121 Stat. 1844, 1975–76 (2007).
Internal Revenue Service .....	Low Income Taxpayer Clinic Grant Program ..	Internal Revenue Service Restructuring and Reform Act of 1998 sec. 3601, 26 U.S.C. 7526.
United States Mint .....	U.S. Commemorative Coin Programs .....	Specific acts of Congress that authorize United States commemorative coin and medal programs provide assistance. <i>See, e.g.,</i> the Louis Braille Bicentennial—Braille Literacy Commemorative Coin Act, Pub. L. 109–247 (2006); the Boy Scouts of America Centennial Commemorative Coin Act, Pub. L. 110–363 (2008); the American Veterans Disabled for Life Commemorative Coin Act, Pub. L. 110–277 (2008); and the National September 11 Memorial & Museum Commemorative Medal Act of 2010, Pub. L. 111–221 (2010).
Departmental Offices, Treasury Executive Office for Asset Forfeiture.	Equitable sharing program (transfer of forfeited property to state and local law enforcement agencies).	18 U.S.C. 981(e)(2); 21 U.S.C. 881(e)(1)(A); 31 U.S.C. 9703.
Various Treasury Bureaus and Offices (including the Internal Revenue Service).	Unreimbursed detail of Federal Employees through the Intergovernmental Personnel Act.	5 U.S.C. 3371 through 3376.
Departmental Offices, Office of the Fiscal Assistant Secretary.	Grants under the RESTORE Act's Direct Component and Centers of Excellence program and supplemental compliance responsibilities for its Comprehensive Plan and Spill Impact Components.	Resources and Ecosystems Sustainability, Tourist Opportunities, and Revived Economies of the Gulf Coast States Act of 2012, Pub. L. 112–141.

Brodi Fontenot,

Assistant Secretary for Management.

[FR Doc. 2015–17034 Filed 7–10–15; 8:45 am]

BILLING CODE 4810–25–P

## DEPARTMENT OF THE INTERIOR

### National Park Service

#### 36 CFR Part 7

[NPS–LACH–18360; PPPWNOCAM3  
PPMOMFO1Z.F00000]

RIN 1024–AE09

#### Special Regulations, Areas of the National Park System, Lake Chelan National Recreation Area, Solid Waste Disposal

**AGENCY:** National Park Service, Interior.

**ACTION:** Proposed rule.

**SUMMARY:** The National Park Service proposes to authorize a solid waste transfer station near Stehekin, Washington, within the boundary of Lake Chelan National Recreation Area, that does not meet all regulatory siting criteria and accepts solid waste generated within the boundary of the

recreation area from non-NPS activities. The proposed rule would authorize this transfer station, notwithstanding certain restrictions found in the general regulations governing solid waste disposal sites in units of the National Park System.

**DATES:** Comments must be received by 11:59 p.m. EST on October 13, 2015.

**ADDRESSES:** You may submit comments, identified by Regulation Identifier Number (RIN) 1024–AE09, by any of the following methods:

- *Federal eRulemaking Portal:* <http://www.regulations.gov>. Follow the instructions for submitting comments.

- *Mail or hand deliver to:* National Park Service, North Cascades National Park Complex, 810 State Route 20, Sedro-Woolley, WA 98284, Attn: Kerri L. Cook, Facility Operations Specialist.

*Instructions:* All submissions received must include the words “National Park Service” or “NPS” and the docket number or RIN (1024–AE09) for this rulemaking. Comments received will be posted without change to <http://www.regulations.gov>, including any personal information provided. The NPS need not consider comments that it receives after the end of the comment

period (see **DATES**) or comments delivered using a method that is not listed above (see **ADDRESSES**).

#### FOR FURTHER INFORMATION CONTACT:

Kerri L. Cook, Facility Operations Specialist, National Park Service, North Cascades National Park Complex, 810 State Route 20, Sedro-Woolley, WA 98284; (360) 854–7280. Email: [Kerri\\_Cook@nps.gov](mailto:Kerri_Cook@nps.gov).

#### SUPPLEMENTARY INFORMATION:

##### Background

On December 22, 1994, the National Park Service (NPS) adopted the regulations codified at 36 CFR part 6 to implement a statutory requirement of Public Law 98–506 (54 U.S.C. 100903) (Act), which was enacted in 1984. The Act prohibits the operation of a solid waste disposal site within the boundary of any unit of the National Park System except for those operating as of September 1, 1984, or those “used only for disposal of wastes generated within that unit of the park system so long as such site will not degrade any of the natural or cultural resources of such park unit.” The Act directed the Secretary of the Interior to promulgate regulations “to carry out the provisions



of this subsection, including reasonable regulations to mitigate the adverse effects of solid waste disposal sites in operation as of September 1, 1984, upon property of the United States.”

36 CFR part 6 regulates both existing and new solid waste disposal sites within the boundaries of any unit of the National Park System to ensure that operation of such sites will not degrade the natural or cultural resources of the park unit. Transfer stations are included in the definition of “solid waste disposal site” in § 6.3 and are therefore subject to 36 CFR part 6.

Section 6.4(a) prohibits any person (including NPS) from operating a new solid waste disposal site within the boundaries of a park unit unless the criteria in § 6.4(a) are met. Section 6.4(a)(1) requires that the solid waste handled by the site is generated solely from “National Park Service activities,” defined in § 6.3 as “operations conducted by the National Park Service or a National Park Service contractor, concessionaire or commercial use licensee.” Section 6.4(a)(9) requires that “the site is not located within one mile of a National Park Service visitor center, campground, ranger station, entrance station, or similar public use facility, or a residential area.” Section 6.4(a)(10) requires that the site is not detectable by public sight, sound, or odor from a scenic vista, a public use facility, a designated or proposed wilderness area, a site listed on (or eligible for listing on) the National Register of Historic Places, or a public road. Section 6.8(a) prohibits the NPS from accepting waste at an NPS operated solid waste disposal site, except for waste generated by NPS activities.

### Proposed Rule

The NPS proposes a park-specific regulation in 36 CFR 7.62 to authorize a limited exception to the part 6 requirements described above. The proposed rule would authorize an NPS transfer station on federal lands near Stehekin, Washington, within the boundary of Lake Chelan National Recreation Area (LACH or park), that does not satisfy all of the siting requirements in part 6 and that accepts non-NPS waste generated by the Stehekin community. The need for this proposed regulation is explained below.

Stehekin is a remote community of approximately 75 year-round plus 80 seasonal residents, located on privately owned land within the statutory boundary of LACH. Stehekin is located at the head of 55-mile-long Lake Chelan and is accessible only by boat, float plane, or foot trail. Non-NPS services and facilities in Stehekin include

seasonal lodging, food operations, and other small businesses that help support 35,000–45,000 park visitors annually. NPS operates the only facility in the Stehekin Valley for the management of solid waste. Waste consolidated at the NPS transfer station is shipped by barge 55 miles down the lake for ultimate disposal. Geographically isolated private residents and businesses in Stehekin have no feasible method of properly disposing solid waste other than the NPS transfer station. Consequently, NPS has for many years accepted Stehekin community waste in its transfer station to deter small dumps on private lands and illegal dumping on public lands. Although the Act does not prohibit NPS from receiving Stehekin waste, this waste does not qualify as waste generated from “National Park Service activities” under the existing regulations, so the current practice of accepting waste from Stehekin at the existing NPS transfer station conflicts with §§ 6.4(a)(1) and 6.8(a) of 36 CFR part 6.

The existing NPS transfer station is located within the 100-year floodplain and is part of a larger maintenance facility that is being relocated outside of the Stehekin River floodplain due to frequent flooding.<sup>1</sup> The NPS seeks to build a new transfer station at the site of the new maintenance facility in a more environmentally suitable location within LACH but outside the 100-year floodplain. The NPS has determined that there is no available or suitable nonfederal land, and a limited amount of buildable federal land, outside the floodplain in the lower Stehekin River valley.<sup>2</sup> The NPS has also determined that, due to geographic constraints, there are no suitable locations for the new transfer station that comply with the site location requirements in § 6.4(a)(9) and (10). Specifically, like the existing maintenance facility and transfer station, the proposed site of the new transfer station: (i) Is located within one mile of a campground (Harlequin Campground) and residential housing;

(ii) will likely be visible from scenic vistas and off-trail areas in designated wilderness areas; (iii) may be heard from a campground (Harlequin Campground); and (iv) may be detectable by sight, sound, or odor from a road open to public travel.

The NPS has determined that in these unique circumstances, it would best protect park resources to allow the NPS transfer station, whether at the existing or proposed location, to accept waste generated by the community of Stehekin, notwithstanding the prohibition on accepting non-NPS waste in §§ 6.4(a)(1) and 6.8(a) and the siting criteria in § 6.4(a)(9) and (10). Due to its geographic isolation, the community of Stehekin has no environmentally responsible or practicable alternative for the disposal of its waste, much of which is generated by the provision of essential services to thousands of park visitors each year. Prohibiting this community from using the existing or proposed NPS transfer station could result in the illegal disposal of waste on park lands, or other disposal practices which would degrade the natural resources of LACH. In this exceptional situation, accepting non-NPS-generated waste for transfer and ultimate disposal outside the park boundary would pose significantly fewer environmental land use concerns than other alternatives. This determination is supported by the analysis contained in the November 2014 Replacement of Administrative Facilities at Stehekin Environmental Assessment (EA), which examined the environmental impacts of the continued operation of the existing NPS transfer station and the construction and operation of the new transfer station, which will employ contemporary environmental methods for handling waste.

The NPS promulgates a special regulation to authorize an exception to a prohibition found in a general regulation only in limited circumstances. The only other exceptions to the part 6 requirements have been granted by special regulation for Alaskan parks under similar circumstances, where geographically isolated communities have no feasible alternative for solid waste disposal that complies with the part 6 requirements. The proposed rule would accommodate the exceptional circumstances of the Stehekin community, which is located in a remote area within the boundary of LACH and which has no other practicable options for environmentally responsible solid-waste disposal. It is designed only to authorize the operation of the existing transfer station and the proposed transfer station at the

<sup>1</sup> For more information about flooding in the Stehekin River Channel Migration Zone and plans to move the existing maintenance facility, see the Stehekin River Corridor Implementation Plan and Final Environmental Impact Statement (FEIS) which can be viewed at the park's planning Web site, <http://www.nps.gov/noca/parkmgmt/planning.htm>, then click on the link entitled “Stehekin River Corridor Implementation Plan/ Environmental Impact Statement (2012).”

<sup>2</sup> See the Replacement of Administrative Facilities at Stehekin Environmental Assessment that tiers off the 2012 FEIS and specifically evaluates what facilities would be constructed and precisely where they would be located. This document can be viewed at <http://parkplanning.nps.gov/SMFRP> by clicking on “Document List.”

locations identified in the EA, which the NPS believes would best protect park resources based upon the analysis contained in the EA. All other requirements in part 6 would remain in effect and apply to the existing and new NPS transfer station, including the requirement in § 6.4(a)(3) that the site of the existing and new facility “will not degrade any of the natural or cultural resources” of LACH. The proposed rule is consistent with the Act, which does not prohibit solid waste disposal sites from handling waste generated by non-NPS activities provided the waste is generated within a park unit and will not degrade any of the park unit’s natural or cultural resources. The proposed rule does not supersede or replace other requirements applicable to solid waste disposal sites, including the requirement (unless there is an approved waiver) in Director’s Order #35B (Sale of National Park Service Produced Utilities) that NPS recover the cost of utilities (including the collection and disposal of solid waste) provided to non-NPS users.

Under these circumstances, the NPS has determined that the exceptions to part 6 in the proposed rule are necessary and would protect park resources by authorizing the NPS to accept solid waste generated by the community of Stehekin in the existing and proposed transfer stations.

#### **Compliance With Other Laws, Executive Orders, and Departmental Policy**

##### *Regulatory Planning and Review (Executive Orders 12866 and 13563)*

Executive Order 12866 provides that the Office of Information and Regulatory Affairs (OIRA) in the Office of Management and Budget will review all significant rules. OIRA has determined that this proposed rule is not significant.

Executive Order 13563 reaffirms the principles of Executive Order 12866 while calling for improvements in the nation’s regulatory system to promote predictability, to reduce uncertainty, and to use the best, most innovative, and least burdensome tools for achieving regulatory ends. The executive order directs agencies to consider regulatory approaches that reduce burdens and maintain flexibility and freedom of choice for the public where these approaches are relevant, feasible, and consistent with regulatory objectives. It emphasizes further that regulations must be based on the best available science and that the rulemaking process must allow for public participation and an open exchange of ideas. We have developed

this proposed rule in a manner consistent with these requirements.

##### *Regulatory Flexibility Act*

This rulemaking will not have a significant economic effect on a substantial number of small entities under the Regulatory Flexibility Act (5 U.S.C. 601 *et seq.*). This certification is based on the benefit-cost and regulatory flexibility analyses found in the report entitled “Benefit-Cost and Regulatory Flexibility Analyses: Solid Waste Management at Lake Chelan National Recreation Area” which can be viewed online at <http://parkplanning.nps.gov/SMFRP> by clicking the link entitled “Document List.”

##### *Small Business Regulatory Enforcement Fairness Act (SBREFA)*

This proposed rule is not a major rule under 5 U.S.C. 804(2), the SBREFA. This proposed rule:

- a. Does not have an annual effect on the economy of \$100 million or more.
- b. Will not cause a major increase in costs or prices for consumers, individual industries, Federal, State, or local government agencies, or geographic regions.
- c. Does not have significant adverse effects on competition, employment, investment, productivity, innovation, or the ability of U.S.-based enterprises to compete with foreign-based enterprises.

##### *Unfunded Mandates Reform Act*

This proposed rule does not impose an unfunded mandate on State, local, or tribal governments, or the private sector of more than \$100 million per year. The proposed rule does not have a significant or unique effect on State, local, or tribal governments or the private sector. A statement containing the information required by the Unfunded Mandates Reform Act (2 U.S.C. 1531 *et seq.*) is not required.

##### *Takings (Executive Order 12630)*

This proposed rule does not affect a taking of private property or otherwise have taking implications under Executive Order 12630. A takings implication assessment is not required.

##### *Federalism (Executive Order 13132)*

Under the criteria in section 1 of Executive Order 13132, this proposed rule does not have sufficient federalism implications to warrant the preparation of a Federalism summary impact statement. A Federalism summary impact statement is not required.

##### *Civil Justice Reform (Executive Order 12988)*

This proposed rule complies with the requirements of Executive Order 12988. Specifically, this rule:

- a. Meets the criteria of section 3(a) requiring that all regulations be reviewed to eliminate errors and ambiguity and be written to minimize litigation; and
- b. Meets the criteria of section 3(b)(2) requiring that all regulations be written in clear language and contain clear legal standards.

##### *Consultation With Indian Tribes (E.O. 13175 and Department Policy)*

The Department of the Interior strives to strengthen its government-to-government relationship with Indian Tribes through a commitment to consultation with Indian Tribes and recognition of their right to self-governance and tribal sovereignty. We have evaluated this proposed rule under the criteria in Executive Order 13175 and under the Department’s tribal consultation policy and have determined that tribal consultation is not required because the proposed rule will have no substantial direct effect on federally recognized Indian tribes.

In May and July 2014, the NPS sent letters to the Tribal Historic Preservation Officers for the Colville Confederated Tribes and the Confederated Tribes and Bands of the Yakama Nation inviting comment regarding the inventory, evaluation, and finding of no effect on cultural resources within the project area. This encompasses the relocation of all maintenance facilities, including the transfer station, as proposed in the preferred alternative (Alternative 2) in the EA. These tribes did not identify any significant concerns related to the project.

##### *Paperwork Reduction Act of 1995 (44 U.S.C. 3501 *et seq.*)*

This proposed rule does not contain information collection requirements, and a submission to the Office of Management and Budget under the Paperwork Reduction Act is not required. We may not conduct or sponsor and you are not required to respond to a collection of information unless it displays a currently valid OMB control number.

##### *National Environmental Policy Act of 1969 (NEPA)*

We have prepared an environmental assessment to determine whether this rulemaking will have a significant impact on the quality of the human environment under NEPA. This

proposed rule would implement part of the preferred alternative (Alternative 2) in the EA that is referenced above and available online at <http://parkplanning.nps.gov/SMFRP> by clicking on "Document List."

*Effects on the Energy Supply (Executive Order 13211)*

This proposed rule is not a significant energy action under the definition in Executive Order 13211. A Statement of Energy Effects is not required.

*Clarity of This Regulation*

The NPS is required by Executive Orders 12866 (section 1(b)(12)), 12988 (section 3(b)(1)(B)), and 13563 (section 1(a)), and by the Presidential Memorandum of June 1, 1998, to write all rules in plain language. This means that each rule we publish must:

- a. Be logically organized;
- b. Use the active voice to address readers directly;
- c. Use common, everyday words and clear language rather than jargon;
- d. Be divided into short sections and sentences; and
- e. Use lists and tables wherever possible.

If you feel that we have not met these requirements, send us comments by one of the methods listed in **ADDRESSES** section above. To better help us revise this proposed rule, your comments should be as specific as possible. For example, you should tell us the numbers of the sections or paragraphs that you find unclear, which sections or sentences are too long, the sections where you feel lists or tables would be useful, etc.

**Drafting Information**

The primary author of this proposed regulation is Jay Calhoun, Regulations Program Specialist, Division of Regulations, Jurisdiction, and Special Park Uses, National Park Service, 1849 C Street NW., Washington, DC 20240.

**Public Participation**

It is the policy of the Department of the Interior, whenever practicable, to afford the public an opportunity to participate in the rulemaking process. Accordingly, interested persons may submit written comments regarding this proposed rule by one of the methods listed in the **ADDRESSES** section above.

**Public Availability of Comments**

Before including your address, phone number, email address, or other personal identifying information in your comment, you should be aware that your entire comment—including your personal identifying information—may

be made publicly available at any time. While you can ask us in your comment to withhold your personal identifying information from public review, we cannot guarantee that we will be able to do so.

**List of Subjects in 36 CFR Part 7**

National parks, Reporting and recordkeeping requirements.

In consideration of the foregoing, NPS proposes to amend 36 CFR part 7 as follows:

**PART 7—SPECIAL REGULATIONS, AREAS OF THE NATIONAL PARK SYSTEM**

- 1. The authority citation for part 7 continues to read as follows:

**Authority:** 54 U.S.C. 100101, 100751, 320102; Sec. 7.96 also issued under DC Code 10–137 and DC Code 50–2201.07.

- 2. In § 7.62, add paragraph (d) as follows:

**§ 7.62 Lake Chelan National Recreation Area.**

\* \* \* \* \*

(d) *Solid waste disposal.* A solid waste transfer station located near Stehekin within the boundary of Lake Chelan National Recreation Area must comply with all provisions in 36 CFR part 6, except it may:

- (1) Accept solid waste generated within the boundary of the park unit that was not generated by National Park Service activities;
- (2) Be located within one mile of a campground or a residential area;
- (3) Be visible by the public from scenic vistas or off-trail areas in designated wilderness areas;
- (4) Be detectable by the public by sound from a campground; and
- (5) Be detectable by the public by sight, sound, or odor from a road open to public travel.

Dated: July 1, 2015.

**Michael Bean,**

*Principal Deputy Assistant Secretary for Fish and Wildlife and Parks.*

[FR Doc. 2015–17025 Filed 7–10–15; 8:45 am]

**BILLING CODE 4310–EJ–P**

**DEPARTMENT OF THE INTERIOR**

**National Park Service**

**36 CFR Part 13**

[NPS–KLGO–18480; PPAKKLGOL0, PPMRLE1Z.L00000]

**RIN 1024–AE27**

**Special Regulations, Areas of the National Park System, Klondike Gold Rush National Historical Park, Horse Management**

**AGENCY:** National Park Service, Interior.  
**ACTION:** Proposed rule.

**SUMMARY:** The National Park Service proposes to revise the special regulations for Klondike Gold Rush National Historical Park to close the core Dyea Historic Townsite to the use of horses except by special use permit issued by the superintendent.

**DATES:** Comments must be received by 11:59 p.m. EST on September 11, 2015.

**ADDRESSES:** You may submit comments, identified by Regulation Identifier Number (RIN) 1024–AE27, by either of the following methods:

- *Federal eRulemaking Portal:* <http://www.regulations.gov>. Follow the instructions for submitting comments.
  - *Mail or hand deliver to:* National Park Service, Regional Director, Alaska Regional Office, 240 West 5th Ave., Anchorage, AK 99501.
  - *Mail or hand deliver to:* National Park Service, Superintendent, Klondike Gold Rush National Historical Park, P.O. Box 517, Skagway, AK 99840.
- Comments can be hand-delivered to the NPS office on 2nd and Broadway in Skagway.

*Instructions:* Comments will not be accepted by fax, email, or in any way other than those specified above. All submissions received must include the words "National Park Service" or "NPS" and must include the docket number or RIN (1024–AE27) for this rulemaking. Comments received will be posted without change to <http://www.regulations.gov>, including any personal information provided.

*Docket:* For access to the docket to read background documents or comments received, go to <http://www.regulations.gov>.

**FOR FURTHER INFORMATION CONTACT:**

Andee Sears, Regional Law Enforcement Specialist, Alaska Regional Office, 240 West 5th Ave., Anchorage, AK 99501. Phone (907) 644–3410. Email: [AKR\\_Regulations@nps.gov](mailto:AKR_Regulations@nps.gov)

**SUPPLEMENTARY INFORMATION:**

### Background and Significance of Klondike Gold Rush National Historic Site

Klondike Gold Rush National Historic Site (KLGO or park) was established in 1980. The park includes 13,191 acres and is the only NPS area authorized and established solely to commemorate an American gold rush. The purpose of the park is to preserve for the benefit and inspiration of the people of the United States, the historic structures, trails, artifacts and landscapes and stories associated with the Klondike Gold Rush of 1898.

Part of the park is the Dyea Historic Townsite, which served as the gateway community to the Chilkoot Trail. At the time of the Gold Rush, approximately 10,000 people lived in Dyea. Dyea is rich in surface artifacts and other remnants from the Klondike Gold Rush of 1898. Horses were a very important and visible component of the 1898 Klondike Gold Rush and the Dyea Historic Townsite from 1897 and for several decades afterward. Thousands of unique and irreplaceable cultural landscape features and artifacts remain within and above the top layers of soil, and as such are highly susceptible to damage from ground disturbance, including disturbance caused by unregulated horseback traffic.

### Authority To Promulgate Regulations

The National Park Service (NPS) manages KLGO under a statute commonly known as the NPS Organic Act of 1916 (Organic Act) (54 U.S.C. 100101 *et seq.*), which gives the NPS broad authority to regulate the use of the park areas under its jurisdiction. The Organic Act authorizes the Secretary of the Interior, acting through NPS, to “prescribe such regulations as the Secretary considers necessary or proper for the use and management of [National Park] System units.” 54 U.S.C. 100751(a).

Management of the park is also governed by the Alaska National Interest Lands Conservation Act (ANILCA). Horses at KLGO are a form of non-motorized surface transportation for traditional activities which is subject to Section 1110(a) of ANILCA. Under this section of ANILCA and implementing regulations at 43 CFR 36.11(h), such use is subject to reasonable regulations to protect the natural and other values of KLGO and the NPS may close an area to this form of transportation by regulation upon a finding by the NPS that the activity would be detrimental to the resources or values of the area. The NPS believes, based upon the analysis in the Dyea Area Plan and

Environmental Assessment (EA) and the associated Finding of No Significant Impact (FONSI), that unregulated horse traffic in the Dyea Historic Townsite would be detrimental to the thousands of unique and irreplaceable cultural landscape features and artifacts that remain within and above the top layers of soil in the area.

### Dyea Area Plan and Environmental Assessment and Proposed Rule

In January 2014, the NPS completed the EA after providing an opportunity for public comment. The proposed action in the EA calls for eliminating horse traffic from the Dyea Historic Townsite except for limited and infrequent use on an established route by private, non-commercial parties pursuant to a special use permit issued by the superintendent. In March 2014, the NPS held a public hearing in Skagway, AK for the proposed restrictions on horse use in the Dyea Historic Townsite in compliance with regulations at 43 CFR 36.11(h)(3). In September 2014, the Regional Director for the Alaska Region signed the FONSI identifying the proposed action in the EA as the selected action. The proposed rule would implement the selected action by closing the Dyea Historic Townsite to the use of horses except under a special use permit issued by the superintendent. If, after observation, the superintendent determines that the desired condition, as defined in the EA, has deteriorated, the superintendent may include permit conditions to protect natural and cultural resources and, if necessary, the NPS may cease issuing permits until impacts from prior uses of horses are mitigated. The NPS may also adopt permit conditions to limit impacts from the use of horses on other user experiences.

The closure area is a small 80 acre parcel encompassing the core Dyea Historic Townsite. Alternate routes have already been designated for commercial horse use outside the core Dyea Historic Townsite and noncommercial horse use will continue to be unrestricted outside the Historic Townsite.

### Compliance With Other Laws, Executive Orders, and Department Policy

#### *Regulatory Planning and Review (Executive Order 12866)*

Executive Order 12866 provides that the Office of Information and Regulatory Affairs (OIRA) in the Office of Management and Budget will review all significant rules. OIRA has determined that this proposed rule is not significant.

Executive Order 13563 reaffirms the principles of Executive Order 12866 while calling for improvements in the nation's regulatory system to promote predictability, to reduce uncertainty, and to use the best, most innovative, and least burdensome tools for achieving regulatory ends. The executive order directs agencies to consider regulatory approaches that reduce burdens and maintain flexibility and freedom of choice for the public where these approaches are relevant, feasible, and consistent with regulatory objectives. Executive Order 13563 emphasizes further that regulations must be based on the best available science and that the rulemaking process must allow for public participation and an open exchange of ideas. We have developed this proposed rule in a manner consistent with these requirements.

#### *Regulatory Flexibility Act*

This proposed rule will not have a significant economic effect on a substantial number of small entities under the Regulatory Flexibility Act (5 U.S.C. 601 *et seq.*). This certification is based on the cost-benefit and regulatory flexibility analyses found in the reports entitled “Regulatory Flexibility Threshold Analysis: Special Regulations for Klondike Gold Rush National Historical Park” and “Preliminary Cost/Benefit Analysis: Special Regulations for Klondike Gold Rush National Historical Park in Alaska” which can be viewed online at <http://www.nps.gov/klgo/learn/management/documents.htm>.

#### *Small Business Regulatory Enforcement Fairness Act*

This proposed rule is not a major rule under 5 U.S.C. 804(2), the Small Business Regulatory Enforcement Fairness Act. This rule:

- a. Does not have an annual effect on the economy of \$100 million or more.
- b. Will not cause a major increase in costs or prices for consumers, individual industries, federal, state, or local government agencies, or geographic regions
- c. Does not have significant adverse effects on competition, employment, investment, productivity, innovation, or the ability of U.S. based enterprises to compete with foreign-based enterprises.

#### *Unfunded Mandates Reform Act*

This proposed rule does not impose an unfunded mandate on State, local, or tribal governments or the private sector of more than \$100 million per year. The proposed rule does not have a significant or unique effect on State,

local or tribal governments or the private sector. A statement containing the information required by the Unfunded Mandates Reform Act (2 U.S.C. 1531 *et seq.*) is therefore not required.

#### *Takings (Executive Order 12630)*

This proposed rule does not affect a taking of private property or otherwise have taking implications under Executive Order 12630. A takings implication assessment is not required.

#### *Federalism (Executive Order 13132)*

Under the criteria in section 1 of Executive Order 13132, this proposed rule does not have sufficient federalism implications to warrant the preparation of a Federalism summary impact statement. The proposed rule is limited in effect to federal lands managed by the NPS in Alaska and would not have a substantial direct effect on state and local government in Alaska. A federalism summary impact statement is not required.

#### *Civil Justice Reform (Executive Order 12988)*

This proposed rule complies with the requirements of Executive Order 12988. Specifically, this proposed rule:

1. Meets the criteria of section 3(a) requiring that all regulations be reviewed to eliminate errors and ambiguity and be written to minimize litigation; and
2. Meets the criteria of section 3(b)(2) requiring that all regulations be written in clear language and contain clear legal standards.

#### *Consultation With Indian Tribes (E.O. 13175 and Department Policy) and ANCSA Corporations*

The Department of the Interior strives to strengthen its government-to-government relationship with Indian Tribes through a commitment to consultation with Indian tribes and recognition of their right to self-governance and tribal sovereignty. We have evaluated this rule under the criteria in Executive Order 13175 and under the Department's tribal consultation policy and Alaska Native Claims Settlement Act (ANCSA) Native Corporation policies and have determined that tribal consultation is not required because the rulemaking will have no substantial direct effect on federally recognized Indian tribes or ANCSA Native Corporation lands, water areas, or resources. Although the NPS has made this determination, the NPS sent copies of the draft plan and letters requesting government-to-government consultation to four affected Native

tribal governments, one of whom is the Carcross/Tagish First Nations tribe in Carcross, Canada. Several meetings were held between 2012 and 2013 with tribal governments in Skagway and Haines to discuss key components of the Dyea Area Plan and EA that were of interest to the local federally recognized tribes.

#### *Paperwork Reduction Act (44 U.S.C. 3501 *et seq.*)*

This proposed rule does not contain any new collections of information that require approval by the Office of Management and Budget (OMB) under the Paperwork Reduction Act. OMB has approved the information collection requirements associated with NPS Special Park Use Permits and has assigned OMB Control Number 1024–0026 (expires 08/31/16). An agency may not conduct or sponsor and a person is not required to respond to a collection of information unless it displays a currently valid OMB control number.

#### *National Environmental Policy Act*

This proposed rule does not constitute a major Federal action significantly affecting the quality of the human environment. A detailed statement under the National Environmental Policy Act of 1969 is not required because we reached a Finding of No Significant Impact. The EA and FONSI are available online at <http://www.nps.gov/klgo/learn/management/documents.htm>.

#### *Effects on the Energy Supply (Executive Order 13211)*

This proposed rule is not a significant energy action under the definition in Executive Order 13211. A Statement of Energy Effects is not required.

#### *Clarity of This Regulation*

We are required by Executive Orders 12866 (section 1(b)(12)), 12988 (section 3(b)(1)(B)), and 13563 (section 1(a)), and by the Presidential Memorandum of June 1, 1998, to write all rules in plain language. This means that each rule we publish must:

1. Be logically organized;
2. Use the active voice to address readers directly;
3. Use common, everyday words and clear language rather than jargon;
4. Be divided into short sections and sentences; and
5. Use lists and tables wherever possible.

If you feel that we have not met these requirements, send us comments by one of the methods listed in the **ADDRESSES** section above. To better help us revise the proposed rule, your comments should be as specific as possible. For

example, you should tell us the numbers of the sections or paragraphs that you find unclear, which sections or sentences are too long, the sections where you feel lists or tables would be useful, etc.

#### **Drafting Information**

The primary authors of this proposed regulation are Jay Calhoun, Regulations Program Specialist, National Park Service, Jenna Giddens of Kenai Fjords National Park, Andee Sears of the Alaska Regional Office, National Park Service, and Tim Steidel of Klondike Gold Rush National Historical Park.

#### **Public Availability of Comments**

Before including your address, phone number, email address, or other personal identifying information in your comment, you should be aware that your entire comment—including your personal identifying information—may be made publicly available at any time. While you can ask us in your comment to withhold your personal identifying information from public review, we cannot guarantee that we will be able to do so.

#### **List of Subjects in 36 CFR Part 13**

Alaska, National parks, Reporting and recordkeeping requirements.

In consideration of the foregoing, the National Park Service proposes to amend 36 CFR part 13 as set forth below:

#### **PART 13—NATIONAL PARK SYSTEM UNITS IN ALASKA**

- 1. The authority citation for part 13 continues to read as follows:

**Authority:** 16 U.S.C. 3124; 54 U.S.C. 100101, 100751, 320102; Sec. 13.1204 also issued under Sec. 1035, Pub. L. 104–333, 110 Stat. 4240.

- 2. Add § 13.1408 to subpart Q to read as follows:

##### **§ 13.1408 Dyea.**

The Dyea Historic Townsite is closed to the use of horses by members of the public except by special use permit issued by the Superintendent. A map showing the boundaries of the Dyea Historic Townsite is available on the park Web site and at the park visitor center.

Dated: July 1, 2015.

**Michael Bean,**

*Principal Deputy Assistant Secretary for Fish and Wildlife and Parks.*

[FR Doc. 2015–17026 Filed 7–10–15; 8:45 am]

**BILLING CODE 4310-EJ-P**

**DEPARTMENT OF THE INTERIOR****Office of the Secretary****43 CFR Parts 47 and 48****RIN 1090-AA98****Land Exchange Procedures and Procedures To Amend the Hawaiian Homes Commission Act, 1920****AGENCY:** Office of the Secretary, Interior.**ACTION:** Proposed rule; extension of comment period.

**SUMMARY:** The Department of the Interior (Department) is extending the comment period for the proposed rule governing land exchanges involving Hawaiian home lands and amendments to the Hawaiian Homes Commission Act proposed by the State of Hawaii until August 12, 2015. The proposed rule would clarify under current Federal law what Departmental procedures would apply.

**DATES:** The comment period for the proposed rule published on May 12, 2015 (80 FR 27134) is extended. Comments must be received by August 12, 2015.

**ADDRESSES:** You may submit comments on the rulemaking by either of the methods listed below. Please use Regulation Identifier Number 1090-AA98 in your message.

1. *Federal eRulemaking Portal:* <http://www.regulations.gov>. Follow the instructions on the Web site for submitting comments.

2. *U.S. mail, courier, or hand delivery:* Office of Native Hawaiian Relations, Department of the Interior, 1849 C Street NW., Washington, DC 20240.

**FOR FURTHER INFORMATION CONTACT:**

Ka'i'ini Kimo Kaloi, Director, Office of Native Hawaiian Relations, telephone (202) 208-7462.

**SUPPLEMENTARY INFORMATION:** On May 12, 2015, we published a proposed rule to clarify how under current law the

Department of the Interior shall review proposed land exchanges involving Hawaiian home lands and amendments to the Hawaiian Homes Commission Act proposed by the State of Hawaii. See 80 FR 27134. Today we are publishing an extension of the comment period, establishing a new comment deadline of August 12, 2015, to allow additional time for the State of Hawaii, Native Hawaiian Community, beneficiaries, and public comment. We will accept all comments received between May 12, 2015, and August 12, 2015. The proposed rule, frequently asked questions, and other information are online at: <http://www.doi.gov/ohr>.

Dated: July 8, 2015.

**Kristen J. Sarri,**

*Principal Deputy Assistant Secretary for Policy, Management and Budget.*

[FR Doc. 2015-17225 Filed 7-10-15; 8:45 am]

**BILLING CODE 4310-93-P**

# Notices

Federal Register

Vol. 80, No. 133

Monday, July 13, 2015

This section of the FEDERAL REGISTER contains documents other than rules or proposed rules that are applicable to the public. Notices of hearings and investigations, committee meetings, agency decisions and rulings, delegations of authority, filing of petitions and applications and agency statements of organization and functions are examples of documents appearing in this section.

## AGENCY FOR INTERNATIONAL DEVELOPMENT

### Notice of July 9 Advisory Committee on Voluntary Foreign Aid Meeting

**AGENCY:** United States Agency for International Development.

**ACTION:** Notice of meeting.

**SUMMARY:** Pursuant to the Federal Advisory Committee Act, notice is hereby given of a meeting of the Advisory Committee on Voluntary Foreign Aid (ACVFA).

*Date:* Thursday, July 9, 2015

*Time:* 2:00–4:00 p.m.

*Location:* Horizon Ballroom, The Ronald Reagan Building, 1300 Pennsylvania Ave, NW., Washington, DC 20004.

#### Purpose

The Advisory Committee on Voluntary Foreign Aid (ACVFA) brings together USAID and private voluntary organization officials, representatives from universities, international nongovernment organizations, U.S. businesses, and government, multilateral, and private organizations to foster understanding, communication, and cooperation in the area of foreign aid.

#### Agenda

USAID Acting Administrator Ambassador Alfonso E. Lenhardt will make opening remarks, followed by panel discussions among ACVFA members and USAID leadership on USAID Forward and Local Solutions. The full meeting agenda will be forthcoming on the ACVFA Web site at <http://www.usaid.gov/who-we-are/organization/advisory-committee>.

#### Stakeholders

The meeting is free and open to the public. Registration information will be forthcoming on the ACVFA Web site at <http://www.usaid.gov/who-we-are/organization/advisory-committee>.

**FOR FURTHER INFORMATION CONTACT:** Jayne Thomisee, [acvfa@usaid.gov](mailto:acvfa@usaid.gov).

Dated: June 8, 2015.

**Jayne Thomisee,**

*Executive Director & Policy Advisor, U.S. Agency for International Development.*

[FR Doc. 2015–17027 Filed 7–10–15; 8:45 am]

**BILLING CODE P**

## DEPARTMENT OF AGRICULTURE

### Submission for OMB Review; Comment Request

July 8, 2015.

The Department of Agriculture has submitted the following information collection requirement(s) to OMB for review and clearance under the Paperwork Reduction Act of 1995, Pub. L. 104–13. Comments regarding (a) whether the collection of information is necessary for the proper performance of the functions of the agency, including whether the information will have practical utility; (b) the accuracy of the agency's estimate of burden including the validity of the methodology and assumptions used; (c) ways to enhance the quality, utility and clarity of the information to be collected; (d) ways to minimize the burden of the collection of information on those who are to respond, including through the use of appropriate automated, electronic, mechanical, or other technological collection techniques or other forms of information technology should be addressed to: Desk Officer for Agriculture, Office of Information and Regulatory Affairs, Office of Management and Budget (OMB), [OIRA\\_Submission@OMB.EOP.GOV](mailto:OIRA_Submission@OMB.EOP.GOV) or fax (202) 395–5806 and to Departmental Clearance Office, USDA, OCIO, Mail Stop 7602, Washington, DC 20250–7602. Comments regarding these information collections are best assured of having their full effect if received within 30 days of this notification. Copies of the submission(s) may be obtained by calling (202) 720–8958.

An agency may not conduct or sponsor a collection of information unless the collection of information displays a currently valid OMB control number and the agency informs potential persons who are to respond to the collection of information that such persons are not required to respond to the collection of information unless it

displays a currently valid OMB control number.

### Food Safety and Inspection Service

*Title:* Animal Disease Reporting System.

*OMB Control Number:* 0583–0139.

*Summary of Collection:* The Food Safety and Inspection Service (FSIS) has been delegated the authority to exercise the functions of the Secretary as provided in the Federal Meat Inspection Act (FMIA) (21 U.S.C. 601 *et seq.*), the Poultry Products Inspection Act (PPIA) (21 U.S.C. 451 *et seq.*). These statutes mandate that FSIS protect the public by ensuring that meat and poultry products are safe, wholesome, unadulterated, and properly labeled and packaged. In accordance with 9 CFR 320.6, 381.180, 352.15, and 354.91, establishments that slaughter meat, poultry, exotic animals, and rabbits are required to maintain certain records regarding their business operations and to report this information to the Agency as required.

*Need and Use of the Information:*

FSIS will collect information from establishments using FSIS Form 6510–7, Poultry Lot Information. FSIS uses this information to plan inspection activities, to develop sampling plans, to target establishments for testing, to develop Agency budget, and to develop reports to Congress.

*Description of Respondents:* Business or other for-profit.

*Number of Respondents:* 1,159.

*Frequency of Responses:* Reporting: Other (daily).

*Total Burden Hours:* 23.180.

**Ruth Brown,**

*Departmental Information Collection Clearance Officer.*

[FR Doc. 2015–17086 Filed 7–10–15; 8:45 am]

**BILLING CODE 3410–DM–P**

## COMMISSION ON CIVIL RIGHTS

### Sunshine Act Meeting Notice

**AGENCY:** United States Commission on Civil Rights.

**ACTION:** Notice of Commission Business Meeting.

**DATES:** *Date and Time:* Friday, July 17, 2015; 10:00 a.m. EST.

**ADDRESSES:** *Place:* 1331 Pennsylvania Ave. NW., Suite 1150, Washington, DC.

**FOR FURTHER INFORMATION CONTACT:** Lenore Ostrowsky, Acting Chief, Public Affairs Unit (202) 376-8591.

Hearing-impaired persons who will attend the briefing and require the services of a sign language interpreter should contact Pamela Dunston at (202) 376-8105 or at [signlanguage@usccr.gov](mailto:signlanguage@usccr.gov) at least seven business days before the scheduled date of the meeting.

**SUPPLEMENTARY INFORMATION:**

**Meeting Agenda**

This meeting is open to the public.

**I. Approval of Agenda**

**II. Program Planning**

- Update on OCRE Staffing requirements to complete outstanding reports
- Discussion on the topic for Statutory Enforcement Report for FY 2016
- Discussion on number of briefing topics and reports for FY 2016 projects
- Discussion and vote on Part A of Peaceful Coexistence report
- Discussion on proposals for forwarding the NY State Advisory Committee report on juvenile solitary confinement

**III. Management and Operations**

- Staff Director Report

**IV. State Advisory Committee (SAC) Appointments**

- Oregon
- South Carolina
- Wisconsin

**V. Adjourn Meeting**

Dated: July 8, 2015.

**David Mussatt,**

*Chief of Regional Programs Unit, U.S. Commission on Civil Rights.*

[FR Doc. 2015-17188 Filed 7-9-15; 11:15 am]

**BILLING CODE 6335-01-P**

**DEPARTMENT OF COMMERCE**

**Bureau of the Census**

[Docket Number: 150630568-5568-01]

**2020 Census Tribal Consultation Meetings**

**AGENCY:** Bureau of the Census, Commerce.

**ACTION:** Notice of 2020 Census tribal consultation meetings.

**SUMMARY:** Pursuant to Executive Order 13175, the Bureau of the Census (Census Bureau) plans to conduct eight tribal consultation meetings and one national webinar with federally recognized tribes across the country between October 2015 and April 2016. These meetings will provide a forum for tribes to share

insights, make recommendations and discuss concerns related to the 2020 Census. The Census Bureau's procedures for outreach, notice and consultation will ensure involvement of tribes, to the extent practicable and permitted by law, before making decisions or implementing policies, rules or programs that affect federally recognized tribal governments. The Census Bureau requests that interested members of the public comment with any questions or topics they would like to see considered in these meetings. For a list of dates, locations and times please check [http://webdev.ssd.census.gov/aian/census\\_2020/](http://webdev.ssd.census.gov/aian/census_2020/). These meetings are open to members of federally recognized tribes by invitation.

**DATES:** Any questions or topics to be considered in the tribal consultation meetings must be received in writing by September 30, 2015.

**ADDRESSES:** Please direct all comments on this notice to Angel L. Petty, Program Assistant, 2020 Partnership and Outreach Staff, Decennial Communications and Budget Office (DCBO), U.S. Census Bureau Washington, DC 20233; telephone (301) 763-2231 or fax (301) 763-2231 or by email [Angel.L.Petty@census.gov](mailto:Angel.L.Petty@census.gov).

**FOR FURTHER INFORMATION CONTACT:** Angel L. Petty, Program Assistant, 2020 Partnership and Outreach Staff, Decennial Communications and Budget Office, U.S. Census Bureau, at the above listed address and telephone number.

**SUPPLEMENTARY INFORMATION:**

**Background**

The Census Bureau's Decennial Directorate and the Intergovernmental Affairs Office is responsible for the development and implementation of outreach and promotion activities to assist in obtaining a complete and accurate census count in 2020 among all residents including the American Indian and Alaska Native (AIAN) populations. This program is one part of the overall outreach and promotion efforts directed at building awareness about the importance of the census and motivating response to the census in communities all across the country.

In accordance with Executive Order 13175, Consultation and Coordination with Indian Tribal Governments, issued November 6, 2000, the Census Bureau will be adhering to its tribal consultation policy by seeking the input of tribal governments in the planning and implementation of the 2020 Census with the goal of ensuring the most accurate counts and data for the American Indian and Alaska Native

population. In that regard, we are seeking comments with regard to the following operational topics:

**Enumeration**—Enumeration is the process of collecting data, and is the central focus of the decennial census operation. Most successful enumeration occurs at the respondent's domicile either through self-response, or through some method of non-response follow-up. The Census Bureau is exploring ways to increase its self-response rates, and is developing tools to ease the burden of responding by leveraging technology, and exploring new modalities to promote Internet response.

**Demographic Statistics**—Demographic statistics provide information that is used to develop an understanding of the age, sex, and racial composition of a population and how it has changed over time through the basic demographic processes of birth, death, and migration.

**Geography**—Geography is a determinative part of the decennial census operation because it provides meaning and context to decennial census counts. Geographic planning provides the framework for census design, data collection, tabulation, and data dissemination. The Census Bureau seeks to use the latest and best geographic methodologies available to support the decennial census.

**2020 Census Field Partnerships and Recruitment**—Partnership efforts focus on maximizing public engagement in the decennial census process in an effort to keep the public informed, encourage self-response, and assist with recruiting the workforce necessary to complete the decennial census. Partnership efforts are directed at individuals from all walks of life, as well as the widest variety of public, private and governmental organizations.

**2020 Census Communications and Planning**—Communications planning seeks to motivate the entire population of the 50 states and its territories, to participate in the decennial census and its partnership activities. Communications planning will culminate in a communications campaign that will focus on, increasing participation in self-response options, improving accuracy, reducing the differential undercount and improving cooperation with enumerators and field operations.

For additional information on the tribal consultation sessions please visit: [http://webdev.ssd.census.gov/aian/census\\_2020/](http://webdev.ssd.census.gov/aian/census_2020/).



Dated: July 7, 2015.

**John H. Thompson,**

*Director, Bureau of the Census.*

[FR Doc. 2015-17029 Filed 7-10-15; 8:45 am]

**BILLING CODE 3510-07-P**

## DEPARTMENT OF COMMERCE

### Economic Development Administration

#### Notice of Petitions by Firms for Determination of Eligibility To Apply for Trade Adjustment Assistance

**AGENCY:** Economic Development Administration, Commerce.

**ACTION:** Notice and opportunity for public comment.

Pursuant to Section 251 of the Trade Act 1974, as amended (19 U.S.C. 2341 *et seq.*), the Economic Development

Administration (EDA) has received petitions for certification of eligibility to apply for Trade Adjustment Assistance from the firms listed below.

Accordingly, EDA has initiated investigations to determine whether increased imports into the United States of articles like or directly competitive with those produced by each of these firms contributed importantly to the total or partial separation of the firm's workers, or threat thereof, and to a decrease in sales or production of each petitioning firm.

#### LIST OF PETITIONS RECEIVED BY EDA FOR CERTIFICATION ELIGIBILITY TO APPLY FOR TRADE ADJUSTMENT ASSISTANCE [7/3/2015 Through 7/7/2015]

Firm name	Firm address	Date accepted for investigation	Product(s)
NicVape, Inc. ....	107 Corporate Drive, Spartanburg, SC 29303.	7/6/2015	The firm manufactures liquids and concentrates for the electronic cigarette industry.
Alpha Products, Inc. ....	5570 West 70th Place, Chicago, IL 60638.	7/6/2015	The firm manufactures stamped and fabricated metal parts including steel and aluminum railcar parts, speaker baskets, cluster mailboxes, and high capacity magazines.
Modular Sound Systems, Inc. d/b/a Bag End Loudspeakers.	1201 Armstrong Street, Algonquin, IL 60102.	7/6/2015	The firm manufactures loudspeakers and electronic components.
Diversified Plastics Corporation.	120 West Mount Vernon Street, Nixa, MO 65714.	7/7/2015	The firm manufactures plastics including expandable polypropylene & polystyrene for packaging, injection molding, beaded press molding, concrete foam blocks and automotive components.
Georgia Chair Company, Inc.	456 Industrial Boulevard, Gainesville, GA 30501.	7/7/2015	The firm manufactures chairs, tables, desks, and bookcases; the manufacturing material is red oak wood.

Any party having a substantial interest in these proceedings may request a public hearing on the matter. A written request for a hearing must be submitted to the Trade Adjustment Assistance for Firms Division, Room 71030, Economic Development Administration, U.S. Department of Commerce, Washington, DC 20230, no later than ten (10) calendar days following publication of this notice.

Please follow the requirements set forth in EDA's regulations at 13 CFR 315.9 for procedures to request a public hearing. The Catalog of Federal Domestic Assistance official number and title for the program under which these petitions are submitted is 11.313, Trade Adjustment Assistance for Firms.

Dated: July 7, 2015.

**Michael S. DeVillo,**

*Eligibility Examiner.*

[FR Doc. 2015-17035 Filed 7-10-15; 8:45 am]

**BILLING CODE 3510-WH-P**

## DEPARTMENT OF COMMERCE

### International Trade Administration

**[A-580-874, A-557-816, A-523-808, A-583-854, A-552-818]**

#### Certain Steel Nails From the Republic of Korea, Malaysia, the Sultanate of Oman, Taiwan, and the Socialist Republic of Vietnam: Antidumping Duty Orders

**AGENCY:** Enforcement and Compliance, International Trade Administration, Department of Commerce.

**SUMMARY:** Based on affirmative final determinations by the Department of Commerce ("the Department") and the International Trade Commission ("ITC"), the Department is issuing antidumping duty orders on certain steel nails ("steel nails") from the Republic of Korea ("Korea"), Malaysia, the Sultanate of Oman ("Oman"), Taiwan, and the Socialist Republic of Vietnam ("Vietnam").

**DATES:** *Effective Date:* July 13, 2015.

**FOR FURTHER INFORMATION CONTACT:** Krisha Hill (Korea), Edythe Artman (Malaysia and Vietnam), Lilit Astvatsatrian (Oman), or Victoria Cho (Taiwan) AD/CVD Operations, Office IV,

Enforcement and Compliance, International Trade Administration, U.S. Department of Commerce, 14th Street and Constitution Avenue NW., Washington, DC 20230; telephone: (202) 482-4037, (202) 482-3931, (202) 482-6412, or (202) 482-5075, respectively.

#### SUPPLEMENTARY INFORMATION:

##### Background

In accordance with sections 735(d) and 777(i)(1) of the Tariff Act of 1930, as amended (the Act), and 19 CFR 351.210(c), on May 20 and 22, 2015, the Department published its affirmative final determinations of sales in the less-than-fair-value investigations of steel nails from Korea, Malaysia, Oman, Taiwan, and Vietnam, respectively.<sup>1</sup>

<sup>1</sup> See *Certain Steel Nails from the Republic of Korea: Final Determination of Sales at Less Than Fair Value*, 80 FR 28955 (May 20, 2015) ("Final Determination of Steel Nails from Korea"); *Certain Steel Nails From Malaysia: Final Determination of Sales at Less Than Fair Value*, 80 FR 28969 (May 20, 2015); *Certain Steel Nails From the Sultanate of Oman: Final Determination of Sales at Less Than Fair Value*, 80 FR 28972 (May 20, 2015); *Certain Steel Nails From Taiwan: Final Determination of Sales at Less Than Fair Value*, 80 FR 28959 (May 20, 2015) ("Final Determination of Steel Nails from Taiwan"); and *Certain Steel Nails From the Socialist Republic of Vietnam: Final Determination*

Pursuant to 735(e) of the Act and 19 CFR 351.224(f), the Department published its amended final determination of sales in the less-than-fair-value investigation of steel nails from Malaysia on June 16, 2015.<sup>2</sup> On July 6, 2015, the ITC notified the Department of its affirmative determinations that an industry in the United States is materially injured within the meaning of section 735(b)(1)(A)(i) of the Act, by reason of the less-than-fair-value imports of steel nails from Korea, Malaysia, Oman, Taiwan, and Vietnam.<sup>3</sup>

### Scope of the Orders

The merchandise covered by these orders is certain steel nails having a nominal shaft length not exceeding 12 inches.<sup>4</sup> Certain steel nails include, but are not limited to, nails made from round wire and nails that are cut from flat-rolled steel. Certain steel nails may be of one piece construction or constructed of two or more pieces. Certain steel nails may be produced from any type of steel, and may have any type of surface finish, head type, shank, point type and shaft diameter. Finishes include, but are not limited to, coating in vinyl, zinc (galvanized), including but not limited to electroplating or hot dipping one or more times), phosphate, cement, and paint. Certain steel nails may have one or more surface finishes. Head styles include, but are not limited to, flat, projection, cupped, oval, brad, headless, double, countersunk, and sinker. Shank styles include, but are not limited to, smooth, barbed, screw threaded, ring shank and fluted. Screw-threaded nails subject to this proceeding are driven using direct force and not by turning the nail using a tool that engages with the head. Point styles include, but are not limited to, diamond, needle, chisel and blunt or no point. Certain steel nails may be sold in bulk, or they may be collated in any manner using any material.

Excluded from the scope of these orders are certain steel nails packaged in combination with one or more non-subject articles, if the total number of

nails of all types, in aggregate regardless of size, is less than 25. If packaged in combination with one or more non-subject articles, certain steel nails remain subject merchandise if the total number of nails of all types, in aggregate regardless of size, is equal to or greater than 25, unless otherwise excluded based on the other exclusions below.

Also excluded from the scope are certain steel nails with a nominal shaft length of one inch or less that are (a) a component of an unassembled article, (b) the total number of nails is sixty (60) or less, and (c) the imported unassembled article falls into one of the following eight groupings: (1) Builders' joinery and carpentry of wood that are classifiable as windows, French-windows and their frames; (2) builders' joinery and carpentry of wood that are classifiable as doors and their frames and thresholds; (3) swivel seats with variable height adjustment; (4) seats that are convertible into beds (with the exception of those classifiable as garden seats or camping equipment); (5) seats of cane, osier, bamboo or similar materials; (6) other seats with wooden frames (with the exception of seats of a kind used for aircraft or motor vehicles); (7) furniture (other than seats) of wood (with the exception of (i) medical, surgical, dental or veterinary furniture; and (ii) barbers' chairs and similar chairs, having rotating as well as both reclining and elevating movements); or (8) furniture (other than seats) of materials other than wood, metal, or plastics (e.g., furniture of cane, osier, bamboo or similar materials). The aforementioned imported unassembled articles are currently classified under the following Harmonized Tariff Schedule of the United States (HTSUS) subheadings: 4418.10, 4418.20, 9401.30, 9401.40, 9401.51, 9401.59, 9401.61, 9401.69, 9403.30, 9403.40, 9403.50, 9403.60, 9403.81 or 9403.89.

Also excluded from the scope of these orders are steel nails that meet the specifications of Type I, Style 20 nails as identified in Tables 29 through 33 of ASTM Standard F1667 (2013 revision).

Also excluded from the scope of these orders are nails suitable for use in powder-actuated hand tools, whether or not threaded, which are currently classified under HTSUS subheadings 7317.00.20.00 and 7317.00.30.00.

Also excluded from the scope of these orders are nails having a case hardness greater than or equal to 50 on the Rockwell Hardness C scale (HRC), a carbon content greater than or equal to 0.5 percent, a round head, a secondary reduced-diameter raised head section, a centered shank, and a smooth

symmetrical point, suitable for use in gas-actuated hand tools.

Also excluded from the scope of these orders are corrugated nails. A corrugated nail is made up of a small strip of corrugated steel with sharp points on one side.

Also excluded from the scope of these orders are thumb tacks, which are currently classified under HTSUS subheading 7317.00.10.00.

Certain steel nails subject to these orders are currently classified under HTSUS subheadings 7317.00.55.02, 7317.00.55.03, 7317.00.55.05, 7317.00.55.07, 7317.00.55.08, 7317.00.55.11, 7317.00.55.18, 7317.00.55.19, 7317.00.55.20, 7317.00.55.30, 7317.00.55.40, 7317.00.55.50, 7317.00.55.60, 7317.00.55.70, 7317.00.55.80, 7317.00.55.90, 7317.00.65.30, 7317.00.65.60 and 7317.00.75.00. Certain steel nails subject to these orders also may be classified under HTSUS subheadings 7907.00.60.00, 8206.00.00.00 or other HTSUS subheadings.

While the HTSUS subheadings are provided for convenience and customs purposes, the written description of the scope of these orders is dispositive.

### Antidumping Duty Orders

As stated above, on July 6, 2015, in accordance with section 735(d) of the Act, the ITC notified the Department of its final determinations in these investigations, in which it found material injury with respect to steel nails from Korea, Malaysia, Oman, Taiwan, and Vietnam.<sup>5</sup> Because the ITC determined that imports of steel nails from Korea, Malaysia, Oman, Taiwan, and Vietnam are materially injuring a U.S. industry, unliquidated entries of such merchandise from Korea, Malaysia, Oman, Taiwan, and Vietnam, entered or withdrawn from warehouse for consumption are subject to the assessment of antidumping duties.

Therefore, in accordance with section 736(a)(1) of the Act, the Department will direct U.S. Customs and Border Protection (CBP) to assess, upon further instruction by the Department, antidumping duties equal to the amount by which the normal value of the merchandise exceeds the export price (or constructed export price) of the merchandise, for all relevant entries of steel nails from Korea, Malaysia, Oman, Taiwan, and Vietnam. Antidumping duties will be assessed on unliquidated entries of steel nails from Malaysia, Oman, and Vietnam entered, or withdrawn from warehouse, for

<sup>5</sup> *Id.*

*of Sales at Less Than Fair Value*, 80 FR 29622 (May 22, 2015) ("Final Determination for Vietnam").

<sup>2</sup> See *Certain Steel Nails From Malaysia: Amended Final Determination of Sales at Less Than Fair Value*, 80 FR 34370 (June 16, 2015).

<sup>3</sup> See *Certain Steel Nails from Korea, Malaysia, Oman, Taiwan, and Vietnam*, USITC Investigation Nos. 701-TA-521 and 731-TA-1252-1255 (Final), USITC Publication 4541 (July 2015).

<sup>4</sup> The shaft length of certain steel nails with flat heads or parallel shoulders under the head shall be measured from under the head or shoulder to the tip of the point. The shaft length of all other certain steel nails shall be measured overall.

consumption on or after December 29, 2014, the date of publication of the preliminary determinations,<sup>6</sup> but will not include entries occurring after the expiration of the provisional measures period and before publication of the ITC's final injury determination as further described below.

Antidumping duties will be assessed on relevant unliquidated entries of steel nails from Korea entered, or withdrawn from warehouse, for consumption on or after December 29, 2014, the date of publication of the preliminary determinations.<sup>7</sup> Antidumping duties will not include entries occurring after the expiration of the provisional measures period and before publication of the ITC's final injury determination as further described below. Because the preliminary determination in the less-than-fair-value investigation involving Taiwan was negative, antidumping duties will be assessed on relevant unliquidated entries of steel nails from Taiwan, entered, or withdrawn from warehouse, for consumption on or after May 20, 2015, the date of publication of the final determination.<sup>8</sup>

<sup>6</sup> See *Certain Steel Nails From Malaysia: Preliminary Determination of Sales at Less Than Fair Value and Postponement of Final Determination and Extension of Provisional Measures*, 79 FR 78055 (December 29, 2014); *Certain Steel Nails From the Sultanate of Oman: Affirmative Preliminary Determination of Sales at Less Than Fair Value and Postponement of Final Determination*, 79 FR 78034 (December 29, 2014); *Certain Steel Nails From the Socialist Republic of Vietnam: Preliminary Determination of Sales at Less Than Fair Value and Postponement of Final Determination and Extension of Provisional Measures*, 79 FR 78058 (December 29, 2014).

<sup>7</sup> See *Certain Steel Nails From the Republic of Korea: Affirmative Preliminary Determination of Sales at Less Than Fair Value and Postponement of Final Determination*, 79 FR 78051 (December 29, 2014). For the single entity consisting of Jinheung Steel, Duo-Fast Korea Co., Ltd., and Jinsco International Corporation ("Jinheung Steel Single Entity"), because this entity's estimated weighted-average final dumping margin is zero, we directed CBP to terminate suspension of liquidation of entries of certain steel nails produced and exported by this entity and have not imposed any cash deposit requirement on those entries. See *Final Determination of Steel Nails from Korea*, 80 FR at 28957.

<sup>8</sup> See *Final Determination of Steel Nails from Taiwan*. No suspension of liquidation has been required for entries exported by Quick Advance, Inc. and produced by Ko Nails, Inc. because its estimated weighted-average final dumping margin is zero. The Department calculated its dumping margin during its investigation based on sales of Quick Advance, Inc. that were produced by Ko Nails, Inc. Therefore, Quick Advance Inc.'s exclusion from antidumping duty liability and any cash deposit requirement pertains only to the channel(s) of sales that were examined by the Department in the investigation. See the Memorandum to the File, entitled, "Clarification of Quick Advance, Inc.'s Sales Channels," dated concurrently with this notice.

### Suspension of Liquidation

In accordance with section 735(c)(1)(B) of the Act, we will instruct CBP to continue to suspend liquidation on all relevant entries of steel nails from Korea,<sup>9</sup> Malaysia, Oman, and Vietnam. We will also instruct CBP to begin suspension of liquidation on all relevant entries of steel nails from Taiwan.<sup>10</sup> These instructions suspending liquidation will remain in effect until further notice.

We will also instruct CBP to require cash deposits equal to the amounts as indicated below. Accordingly, effective on the date of publication of the ITC's final affirmative injury determinations, CBP will require, at the same time as importers would normally deposit estimated duties on this subject merchandise, a cash deposit equal to the estimated weighted-average antidumping duty margins listed below.<sup>11</sup> The relevant all-others rate (for Korea, Malaysia, Oman, and Taiwan) or the rate for the Vietnam-wide entity (for Vietnam), as applicable, apply to all producers or exporters not specifically listed. For the purpose of determining cash deposit rates, the estimated weighted-average dumping margins for imports of subject merchandise from Vietnam will be adjusted, as appropriate, for export subsidies found in the final determination of the companion countervailing duty investigation of this merchandise imported from Vietnam.<sup>12</sup>

### Provisional Measures

Section 733(d) of the Act states that instructions issued pursuant to an affirmative preliminary determination may not remain in effect for more than four months except where exporters representing a significant proportion of exports of the subject merchandise, request the Department to extend that four-month period to no more than six months. At the request of exporters that account for a significant proportion of steel nails from Korea, Malaysia, Oman, and Vietnam, we extended the four-month period by additional 42 days in each case.<sup>13</sup> In the underlying

<sup>9</sup> Except for those entries produced and exported by the Jinheung Steel Single Entity, as stated above.

<sup>10</sup> Except for those entries produced by Ko Nails, Inc. and exported by the Quick Advance Inc., as stated above.

<sup>11</sup> See section 736(a)(3) of the Act.

<sup>12</sup> See *Final Determination for Vietnam*, 80 at 29623. See also *Certain Steel Nails From the Socialist Republic of Vietnam: Final Affirmative Countervailing Duty Determination*, 80 FR 28962 (May 20, 2015), and accompanying Issues and Decision Memorandum at 12–22.

<sup>13</sup> See *Certain Steel Nails From the Republic of Korea, Malaysia, the Sultanate of Oman, Taiwan, and the Socialist Republic of Vietnam*:

investigations, the Department published the preliminary determinations on December 29, 2014. Therefore, the extended period, beginning on the date of publication of the preliminary determinations, ended on June 26, 2015. Furthermore, section 737(b) of the Act states that definitive duties are to begin on the date of publication of the ITC's final injury determination.

Therefore, in accordance with section 733(d) of the Act and our practice, we will instruct CBP to terminate the suspension of liquidation and to liquidate, without regard to antidumping duties, unliquidated entries of steel nails from Korea, Malaysia, Oman, and Vietnam entered, or withdrawn from warehouse, for consumption after June 26, 2015, the date on which the provisional measures expired, until and through the day preceding the date of publication of the ITC's final injury determinations in the **Federal Register**. Suspension of liquidation will resume on the date of publication of the ITC's final determination in the **Federal Register**.

The weighted-average dumping margins are as follows:

Exporter/producer	Dumping margins (%)
<b>Korea:</b>	
Daejin Steel .....	11.80
Jinheung Steel Corporation, Jinsco International Corporation, and Duo-Fast Korea Co., Ltd. <sup>14</sup> .....	0.00
All Others .....	11.80
<b>Malaysia:</b>	
Inmax Sdn. Bhd. ....	39.35
Region International Co. Ltd. and Region System Sdn. Bhd. ....	2.66
Tag Fasteners Sdn. Bhd. ....	39.35
All Others .....	2.66
<b>Oman:</b>	
Oman Fasteners, LLC .....	9.10
All Others .....	9.10
<b>Taiwan:</b>	
PT Enterprises .....	2.24

*Postponement of Preliminary Determination of Antidumping Duty Investigations*, 79 FR 63082 (October 22, 2014). Provisional measures were not effect for entries of subject merchandise from Taiwan because the Department's preliminary determination was negative. See *Certain Steel Nails From Taiwan: Negative Preliminary Determination of Sales at Less Than Fair Value and Postponement of Final Determination*, 79 FR 78053, 78054 (December 29, 2014) (Preliminary Determination).

<sup>14</sup> No suspension of liquidation will be required for entries of these firms because their estimated weighted-average dumping margin is zero. See *Final Determination of Steel Nails from Korea*.

Exporter/producer	Dumping margins (%)
Quick Advance Inc. <sup>15</sup> .....	0.00
All Others .....	2.24
Vietnam <sup>16</sup> :	
Kosteel Vina Limited Company	323.99
Vietnam-Wide Entity * .....	323.99%

\* The Vietnam-wide entity includes the following exporters/producers: Region Industries Co., Ltd., United Nail Products Co., Ltd., Cong Ty TNHH Công Nghệ Nhựa A Chau, Kim Tin Group, Megastar Co., Ltd. and Simone Accessories Collection.

This notice constitutes the antidumping duty orders with respect to steel nails from Korea, Malaysia, Oman, Taiwan, and Vietnam pursuant to section 736(a) of the Act. Interested parties can find a list of antidumping duty orders currently in effect at <http://enforcement.trade.gov/stats/iastats1.html>.

These orders are published in accordance with section 736(a) of the Act and 19 CFR 351.211.

Dated: July 7, 2015.

**Paul Piquado,**

*Assistant Secretary for Enforcement and Compliance.*

[FR Doc. 2015-17239 Filed 7-10-15; 8:45 am]

**BILLING CODE 3510-DS-P**

## DEPARTMENT OF COMMERCE

### International Trade Administration

[A-560-822, A-557-813, A-570-886, A-583-843, A-549-821, A-552-806]

### Polyethylene Retail Carrier Bags From Indonesia, Malaysia, the People's Republic of China, Taiwan, Thailand, and the Socialist Republic of Vietnam: Final Results of the Expedited Sunset Reviews of the Antidumping Duty Orders

**AGENCY:** Enforcement and Compliance, International Trade Administration, Department of Commerce.

**SUMMARY:** The Department of Commerce (the Department) finds that revocation of the antidumping duty orders on polyethylene retail carrier bags from Indonesia, Malaysia, the People's Republic of China, Taiwan, Thailand,

<sup>15</sup> As stated above, no suspension of liquidation will be required for entries exported by Quick Advance Inc., which were produced by Ko Nails, Inc. because its estimated weighted-average dumping margin is zero. See *Final Determination of Steel Nails from Taiwan*.

<sup>16</sup> As explained in the *Final Determination for Vietnam*, 80 at 29623, the estimated weighted-average dumping margins for the separate-rate company and the Vietnam-wide entity will be adjusted for export subsidies. As a result of these adjustments, the cash deposit rate for both the separate-rate company and the Vietnam-wide entity will be 290.40 percent.

and the Socialist Republic of Vietnam would be likely to lead to continuation or recurrence of dumping as indicated in the "Final Results of Sunset Review" section of this notice.

**DATES:** *Effective Date:* July 13, 2015.

**FOR FURTHER INFORMATION CONTACT:** Thomas Schauer or Minoo Hatten, AD/CVD Operations, Office I, Enforcement and Compliance, International Trade Administration, U.S. Department of Commerce, 14th Street and Constitution Avenue NW., Washington, DC 20230; telephone: (202) 482-0410 or (202) 482-1690, respectively.

### SUPPLEMENTARY INFORMATION:

#### Background

On April 1, 2015, the Department published the notice of initiation of the sunset reviews of the antidumping duty orders on polyethylene retail carrier bags (PRCBs) from Indonesia, Malaysia, the People's Republic of China (PRC), Taiwan, Thailand, and the Socialist Republic of Vietnam (Vietnam) pursuant to section 751(c) of the Tariff Act of 1930, as amended (the Act).<sup>1</sup>

In accordance with 19 CFR 351.218(d)(1)(i), the Department received notices of intent to participate in these sunset reviews from the Polyethylene Retail Carrier Bag Committee (the domestic interested party) within 15 days after the date of publication of the *Initiation Notice* and the effective date of the initiation of this sunset review.<sup>2</sup> The domestic interested party claimed interested party status under section 771(9)(C) of the Act.

The Department received complete substantive responses to the *Initiation*

<sup>1</sup> See *Initiation of Five-year ("Sunset") Review*, 80 FR 17388 (April 1, 2015) (*Initiation Notice*).

<sup>2</sup> See Letters to the Secretary from Polyethylene Retail Carrier Bag Committee: 1) "Second Five-Year ('Sunset') Review Of Antidumping Duty Order On Polyethylene Retail Carrier Bags From Indonesia: Notice Of Intent To Participate In Sunset Review" (April 16, 2015); 2) "Second Five-Year ('Sunset') Review Of Antidumping Duty Order On Polyethylene Retail Carrier Bags From Malaysia: Notice Of Intent To Participate In Sunset Review" (April 16, 2015); 3) "Second Five-Year ('Sunset') Review Of Antidumping Duty Order On Polyethylene Retail Carrier Bags From The People's Republic Of China: Notice Of Intent To Participate In Sunset Review" (April 16, 2015); 4) "Second Five-Year ('Sunset') Review Of Antidumping Duty Order On Polyethylene Retail Carrier Bags From Taiwan: Notice Of Intent To Participate In Sunset Review" (April 16, 2015); 5) "Second Five-Year ('Sunset') Review Of Antidumping Duty Order On Polyethylene Retail Carrier Bags From Thailand: Notice Of Intent To Participate In Sunset Review" (April 16, 2015); and 6) "Second Five-Year ('Sunset') Review Of Antidumping Duty Order On Polyethylene Retail Carrier Bags From The Socialist Republic Of Vietnam: Notice Of Intent To Participate In Sunset Review" (April 16, 2015). The Polyethylene Retail Carrier Bag Committee is comprised of five domestic producers of PRCBs: Hilex Poly Co., LLC, Superbag Corporation, Unistar Plastics, LLC, Command Packaging, and Roplast Industries, Inc. *Id.*

*Notice* from the domestic interested party within the 30-day period specified in 19 CFR 351.218(d)(3)(i).<sup>3</sup> The Department received no substantive responses from any respondent interested party. In accordance with section 751(c)(3)(B) of the Act and 19 CFR 351.218(e)(1)(ii)(C)(2), the Department conducted expedited (120-day) sunset reviews of the antidumping duty orders on PRCBs from Indonesia, Malaysia, the PRC, Taiwan, Thailand, and Vietnam.

### Scope of the Orders

The merchandise subject to the antidumping duty orders is PRCBs which are currently classified under subheading 3923.21.0085 of the Harmonized Tariff Schedule of the United States (HTSUS). The HTSUS number is provided for convenience and customs purposes. A full description of the scope of the order is contained in the Preliminary Decision Memorandum.<sup>4</sup> The written description is dispositive.

### Analysis of Comments Received

A complete discussion of all issues raised in these reviews are addressed in the accompanying Issues and Decision Memorandum, which is hereby adopted by this notice, including the likelihood of continuation or recurrence of dumping in the event of revocation

<sup>3</sup> See letters from domestic interested party: "Five-Year ('Sunset') Review Of Antidumping Duty Order On Polyethylene Retail Carrier Bags From Indonesia: Domestic Industry's Substantive Response" (May 1, 2015) (Indonesia Substantive Response); 2) "Second Five-Year ('Sunset') Review Of Antidumping Duty Order On Polyethylene Retail Carrier Bags From Malaysia: Domestic Industry's Substantive Response" (May 1, 2015) (Malaysia Substantive Response); 3) "Second Five-Year ('Sunset') Review Of Antidumping Duty Order On Polyethylene Retail Carrier Bags From The People's Republic Of China: Domestic Industry's Substantive Response" (May 1, 2015) (PRC Substantive Response); 4) "Five-Year ('Sunset') Review Of Antidumping Duty Order On Polyethylene Retail Carrier Bags From Taiwan: Domestic Industry's Substantive Response" (May 1, 2015) (Taiwan Substantive Response); 5) "Second Five-Year ('Sunset') Review Of Antidumping Duty Order On Polyethylene Retail Carrier Bags From Thailand: Domestic Industry's Substantive Response" (May 1, 2015) (Thailand Substantive Response); and 6) "Five-Year ('Sunset') Review Of Antidumping Duty Order On Polyethylene Retail Carrier Bags From The Socialist Republic Of Vietnam: Domestic Industry's Substantive Response" (May 1, 2015) (Vietnam Substantive Response).

<sup>4</sup> See Memorandum from Christian Marsh, Deputy Assistant Secretary for Antidumping and Countervailing Duty Operations, to Paul Piquado, Assistant Secretary for Enforcement and Compliance, entitled, "Issues and Decision Memorandum for the Expedited Sunset Reviews of the Antidumping Duty Orders on Polyethylene Retail Carrier Bags from Indonesia, Malaysia, the People's Republic of China, Taiwan, Thailand, and the Socialist Republic of Vietnam" dated concurrently with this notice (Issues and Decision Memorandum).

and the magnitude of dumping margins likely to prevail if the orders were revoked.<sup>5</sup> The Issues and Decision Memorandum is a public document and is on file electronically *via* Enforcement and Compliance's Antidumping and Countervailing Duty Centralized Electronic Service System (ACCESS). ACCESS is available to registered users at <http://access.trade.gov> and to all parties in the Central Records Unit in Room B8024 of the main Department of Commerce building. In addition, a complete version of the Issues and Decision Memorandum can be accessed directly on the Internet at <http://enforcement.trade.gov/frn/index.html>.

### Final Results of Reviews

Pursuant to sections 751(c)(1) and 752(c) of the Act, we determine that revocation of the antidumping duty orders on PRCBs from Indonesia, Malaysia, the PRC, Taiwan, Thailand, and Vietnam would be likely to lead to continuation or recurrence of dumping up to the following weighted-average margin percentages:

Country	Weighted-Average Margin (Percent)
Indonesia .....	85.17
Malaysia .....	101.74
PRC .....	77.57
Taiwan .....	95.81
Thailand .....	122.88
Vietnam .....	76.11

### Notification to Interested Parties

This notice serves as the only reminder to parties subject to administrative protective orders (APO) of their responsibility concerning the disposition of proprietary information disclosed under APO in accordance with 19 CFR 351.305(a). Timely written notification of the destruction of APO materials or conversion to judicial protective order is hereby requested. Failure to comply with the regulations and terms of an APO is a violation which is subject to sanction.

The Department is issuing and publishing these final results and notice in accordance with sections 751(c), 752(c), and 777(i)(1) of the Act and 19 CFR 351.218.

Dated: July 6, 2015.

**Paul Piquado,**

*Assistant Secretary for Enforcement and Compliance.*

[FR Doc. 2015-17071 Filed 7-10-15; 8:45 am]

**BILLING CODE 3510-DS-P**

<sup>5</sup> See Issues and Decision Memorandum.

## DEPARTMENT OF COMMERCE

### International Trade Administration

[A-570-970]

### Multilayered Wood Flooring From the People's Republic of China: Final Results of Changed Circumstances Review

**AGENCY:** Enforcement and Compliance, International Trade Administration, Department of Commerce.

**SUMMARY:** On February 12, 2015, the Department of Commerce (the "Department") published its initiation and preliminary results of a changed circumstances review<sup>1</sup> of the antidumping duty ("AD") order on multilayered wood flooring ("MLWF") from the People's Republic of China ("PRC").<sup>2</sup> The Department preliminarily determined that Zhejiang Fuma Warm Technology Co., Ltd. ("Zhejiang Fuma") is the successor-in-interest to Huzhou Fuma Wood Bus. Co., Ltd. ("Huzhou Fuma") for purposes of the AD order on MLWF from the PRC and, as such, is entitled to Huzhou Fuma's cash deposit rate with respect to entries of subject merchandise. We invited interested parties to comment on the *Preliminary Results*. As no parties submitted comments, and there is no other information or evidence on the record calling into question our *Preliminary Results*, the Department is making no changes to the *Preliminary Results*.

**DATES:** *Effective Date:* July 13, 2015.

**FOR FURTHER INFORMATION CONTACT:** Krishna Hill, AD/CVD Operations, Office IV, Enforcement and Compliance, International Trade Administration, U.S. Department of Commerce, 14th Street and Constitution Avenue NW., Washington, DC 20230; telephone: (202) 482-4037.

### SUPPLEMENTARY INFORMATION:

#### Background

On February 12, 2015, the Department initiated a changed circumstances review and made a preliminary finding that Zhejiang Fuma is the successor-in-interest to Huzhou Fuma, and is entitled to Huzhou Fuma's cash deposit rate with respect to entries of merchandise subject to the AD order on MLWF from

<sup>1</sup> See *Initiation and Preliminary Results of Antidumping Duty Changed Circumstances Review: Multilayered Wood Flooring From the People's Republic of China*, 80 FR 7842 (February 12, 2015) ("Preliminary Results"), and accompanying Preliminary Decision Memorandum.

<sup>2</sup> See *Multilayered Wood Flooring From the People's Republic of China: Amended Final Determination of Sales at Less Than Fair Value and Antidumping Duty Order*, 76 FR 76690 (December 8, 2011).

the PRC.<sup>3</sup> We also provided interested parties 14 days from the date of publication of the *Preliminary Results* to submit case briefs in accordance with 19 CFR 351.309(c)(1)(ii). No interested parties submitted case briefs or requested a hearing. On June 24, 2015, the Department issued to interested parties draft customs instructions and solicited comment. None were received.

### Scope of the Order

Multilayered wood flooring is composed of an assembly of two or more layers or plies of wood veneer(s) in combination with a core. Imports of the subject merchandise are provided for under the following subheadings of the Harmonized Tariff Schedule of the United States ("HTSUS"): 4412.31.0520; 4412.31.0540; 4412.31.0560; 4412.31.2510; 4412.31.2520; 4412.31.4040; 4412.31.4050; 4412.31.4060; 4412.31.4070; 4412.31.5125; 4412.31.5135; 4412.31.5155; 4412.31.5165; 4412.31.3175; 4412.31.6000; 4412.31.9100; 4412.32.0520; 4412.32.0540; 4412.32.0560; 4412.32.2510; 4412.32.2520; 4412.32.3125; 4412.32.3135; 4412.32.3155; 4412.32.3165; 4412.32.3175; 4412.32.3185; 4412.32.5600; 4412.39.1000; 4412.39.3000; 4412.39.4011; 4412.39.4012; 4412.39.4019; 4412.39.4031; 4412.39.4032; 4412.39.4039; 4412.39.4051; 4412.39.4052; 4412.39.4059; 4412.39.4061; 4412.39.4062; 4412.39.4069; 4412.39.5010; 4412.39.5030; 4412.39.5050; 4412.94.1030; 4412.94.1050; 4412.94.3105; 4412.94.3111; 4412.94.3121; 4412.94.3131; 4412.94.3141; 4412.94.3160; 4412.94.3171; 4412.94.4100; 4412.94.5100; 4412.94.6000; 4412.94.7000; 4412.94.8000; 4412.94.9000; 4412.94.9500; 4412.99.0600; 4412.99.1020; 4412.99.1030; 4412.99.1040; 4412.99.3110; 4412.99.3120; 4412.99.3130; 4412.99.3140; 4412.99.3150; 4412.99.3160; 4412.99.3170; 4412.99.4100; 4412.99.5100; 4412.99.5710; 4412.99.6000; 4412.99.7000; 4412.99.8000; 4412.99.9000; 4412.99.9500; 4418.71.2000; 4418.71.9000; 4418.72.2000; 4418.72.9500; and 9801.00.2500.<sup>4</sup> While HTSUS subheadings are provided for convenience and customs purposes, the

<sup>3</sup> See *Preliminary Results*, 80 FR at 7842-43.

<sup>4</sup> For a complete description of the Scope of the Order, see Preliminary Decision Memorandum at 2-3.

written description of the subject merchandise is dispositive.

### Final Results of Changed Circumstances Review

Because no party submitted a case brief in response to the Department's *Preliminary Results*, and because the record contains no other information or evidence that calls into question the *Preliminary Results*, the Department continues to find that Zhejiang Fuma is the successor-in-interest to Huzhou Fuma, and is entitled to Huzhou Fuma's cash deposit rate with respect to entries of merchandise subject to the AD order on MLWF from the PRC.<sup>5</sup>

### Instructions to U.S. Customs and Border Protection

Based on these final results, we will instruct U.S. Customs and Border Protection to collect estimated ADs for all shipments of subject merchandise exported by Zhejiang Fuma and entered, or withdrawn from warehouse, for consumption on or after the publication date of this notice in the **Federal Register** at the current AD cash deposit rate for Huzhou Fuma (*i.e.*, 58.84 percent). This cash deposit requirement shall remain in effect until further notice.

### Notification to Interested Parties

This notice serves as a final reminder to parties subject to administrative protective order ("APO") of their responsibility concerning the disposition of proprietary information disclosed under APO in accordance with 19 CFR 351.305(a)(3). Timely written notification of the return/destruction of APO materials or conversion to judicial protective order is hereby requested. Failure to comply with the regulations and terms of an APO is a sanctionable violation.

We are issuing and publishing this final results notice in accordance with sections 751(b) and 777(i) of the Tariff Act of 1930, as amended, and 19 CFR 351.216.

Dated: July 7, 2015.

**Paul Piquado,**

*Assistant Secretary for Enforcement and Compliance.*

[FR Doc. 2015-17081 Filed 7-10-15; 8:45 am]

**BILLING CODE 3510-DS-P**

<sup>5</sup> For a complete discussion of the Department's findings, which remain unchanged in these final results and which are herein incorporated by reference and adopted by this notice, see generally the Preliminary Decision Memorandum accompanying the *Preliminary Results*.

## DEPARTMENT OF COMMERCE

### National Oceanic and Atmospheric Administration

RIN 0648-XD807

### Takes of Marine Mammals Incidental to Specified Activities; Construction Activities at the Children's Pool Lifeguard Station at La Jolla, California

**AGENCY:** National Marine Fisheries Service (NMFS), National Oceanic and Atmospheric Administration (NOAA), Commerce.

**ACTION:** Notice; issuance of an Incidental Harassment Authorization (IHA).

**SUMMARY:** In accordance with the Marine Mammal Protection Act (MMPA), notification is hereby given that NMFS has issued an IHA to the City of San Diego for an IHA to take small numbers of marine mammals, by Level B harassment, incidental to construction activities at the Children's Pool Lifeguard Station in La Jolla, California.

**DATES:** Effective June 28, 2015 to June 27, 2016.

**ADDRESSES:** A copy of the IHA and the IHA application are available by writing to Jolie Harrison, Chief, Permits and Conservation Division, Office of Protected Resources, National Marine Fisheries Service, 1315 East-West Highway, Silver Spring, MD 20910 or by telephone to the contacts listed below (see **FOR FURTHER INFORMATION CONTACT**).

An electronic copy of the IHA application containing a list of the references used in this document may be obtained by writing to the address specified above, telephoning the contact listed below (see **FOR FURTHER INFORMATION CONTACT**), or visiting the Internet at: <http://www.nmfs.noaa.gov/pr/permits/incidental/construction.htm>. Documents cited in this notice, including the IHA application, may also be viewed, by appointment, during regular business hours, at the aforementioned address.

**FOR FURTHER INFORMATION CONTACT:** Howard Goldstein or Jolie Harrison, Office of Protected Resources, NMFS, 301-427-8401.

### SUPPLEMENTARY INFORMATION:

#### Background

Sections 101(a)(5)(A) and (D) of the MMPA (16 U.S.C. 1361 *et seq.*) direct the Secretary of Commerce (Secretary) to allow, upon request, the incidental, but not intentional, taking of small numbers of marine mammals by United States citizens who engage in a specified activity (other than commercial fishing) within a specified geographical region if

certain findings are made and either regulations are issued or, if the taking is limited to harassment, a notice of a proposed authorization is provided to the public for review.

An authorization for the incidental takings shall be granted if NMFS finds that the taking will have a negligible impact on the species or stock(s), will not have an unmitigable adverse impact on the availability of the species or stock(s) for subsistence uses (where relevant), and if the permissible methods of taking and requirements pertaining to the mitigation, monitoring, and reporting of such takings are set forth. NMFS has defined "negligible impact" in 50 CFR 216.103 as "... an impact resulting from the specified activity that cannot be reasonably expected to, and is not reasonably likely to, adversely affect the species or stock through effects on annual rates of recruitment or survival."

Section 101(a)(5)(D) of the MMPA established an expedited process by which citizens of the United States can apply for an authorization to incidentally take small numbers of marine mammals by harassment. Section 101(a)(5)(D) of the MMPA establishes a 45-day time limit for NMFS's review of an application followed by a 30-day public notice and comment period on any proposed authorizations for the incidental harassment of small numbers of marine mammals. Within 45 days of the close of the public comment period, NMFS must either issue or deny the authorization.

Except with respect to certain activities not pertinent here, the MMPA defines "harassment" as: Any act of pursuit, torment, or annoyance which (i) has the potential to injure a marine mammal or marine mammal stock in the wild [Level A harassment]; or (ii) has the potential to disturb a marine mammal or marine mammal stock in the wild by causing disruption of behavioral patterns, including, but not limited to, migration, breathing, nursing, breeding, feeding, or sheltering [Level B harassment].

### Summary of Request

On February 25, 2015, NMFS received an application from the City of San Diego, Engineering and Capital Projects Department, requesting an IHA for the taking of marine mammals incidental to construction activities. NMFS determined that the IHA application was adequate and complete on April 9, 2015. NMFS published a notice making preliminary determinations and proposing to issue an IHA on May 19,

2015 (80 FR 28588). The notice initiated a 30-day public comment period.

The City of San Diego will undertake the construction activities between June 2015 and June 2016 at the Children's Pool Lifeguard Station in La Jolla, California. In-air noise generated from equipment used during the construction activities is likely to result in the take of marine mammals. The requested IHA will authorize the take, by Level B (behavioral) harassment, of small numbers of Pacific harbor seals (*Phoca vitulina richardii*), California sea lions (*Zalophus californianus*), and northern elephant seals (*Mirounga angustirostris*) incidental to construction activities of the Children's Pool Lifeguard Station at La Jolla, CA. Because the construction activities were subject to delays and cannot be completed by June 27, 2015, the City of San Diego has requested a renewal of the 2014 to 2015 IHA for an additional year. The construction activities are planned to take place during June 2015 to June 2016 in La Jolla, CA. Regarding the previous IHA, NMFS published a notice in the **Federal Register** (79 FR 8160) on February 11, 2014, making preliminary determinations and proposing to issue an IHA. The notice initiated a 30-day public comment period. On June 6, 2014, NMFS published a notice in the **Federal Register** (79 FR 32699) announcing the issuance of an IHA. Additional information on the construction activities at the Children's Pool Lifeguard Station is contained in the IHA application, which is available upon request (see **ADDRESSES**).

Also, NMFS issued the City of San Diego an IHA in 2013 (78 FR 40705, July 8, 2013) for demolition and construction activities at the Children's Pool Lifeguard Station that were scheduled to be completed in 2013. Because the construction activities were subject to delays (e.g., nesting migratory birds, unexpected drainage pipes, unexpected demolition and construction planning, etc.) and could not be completed by December 15, 2013, the City of San Diego requested a renewal of the 2013 IHA for an additional year. Additional information on the construction activities at the Children's Pool Lifeguard Station is contained in the IHA application, which is available upon request (see **ADDRESSES**).

### Description of the Specified Activity

#### Overview

The City of San Diego plans to conduct construction activities at the Children's Pool Lifeguard Station in La Jolla, CA in order to meet the needs of the lifeguards at Children's Pool and the

demand for lifeguard services. The overall project includes the demolition of the existing lifeguard station and construction of a new, three-story, lifeguard station on the same site. Demolition of the existing lifeguard station was completed in 2013 to 2014 and construction of the new lifeguard station is expected to be completed in 2015 to 2016. Because the previously existing lifeguard station was demolished and closed to entry, a temporary lifeguard tower was moved onto the bluff near the previous lifeguard station.

#### Dates and Duration

The City of San Diego is planning to begin/resume the project at the Children's Pool in La Jolla, CA on June 1, 2015, (see page 30 to 31 of the Negative Declaration in the IHA application) with completion of the new lifeguard station to be completed by December 15, 2015. The City of San Diego and NMFS are requiring a moratorium on all construction activities during harbor seal pupping and weaning (i.e., December 15th to May 30th; see page 5 of the Mitigated Negative Declaration in the IHA application). Therefore, work on this project can only be performed between June 1st and December 14th of any year.

Planned construction activities will generally occur Monday through Friday (no work will occur on holidays) during daylight hours only, as stipulated in the "Mitigated Negative Declaration" included in the IHA application and local ordinances. As a modification to the original IHA, the City of San Diego has requested that planned construction activities be allowed on weekends (i.e., Saturday and Sunday to ensure completion of the project during 2015. The exact dates of the planned activities depend on logistics and scheduling. The IHA is valid through June 2016 to allow for construction delays.

#### Specific Geographic Region

The La Jolla Children's Pool Lifeguard Station is located at 827 1/2 Coast Boulevard, La Jolla, CA 92037 (32° 50' 50.02" North, 117° 16' 42.8" West). The locations and distances (in ft) from the construction site to the Children's Pool haul-out area, breakwater ledge/rocks haul-out area, reef haul-out area, and Casa Beach haul-out area can be found in the City of San Diego's IHA application.

#### Detailed Description of the Specified Activities

The Children's Pool was created in 1931 by building a breakwater wall which created a protected pool for

swimming. Although partially filled with sand, the Children's Pool still has open water for swimming and a beach for sunbathing and beachcombing. The Children's Pool and nearby shore areas (i.e., shoreline, beaches, and reefs of La Jolla) are used by swimmers, sunbathers, SCUBA divers and snorkelers, shore/surf fishermen, school classes, tide pool explorers, kayakers, surfers, boogie and skim boarders, seal, sea lion, bird and nature watchers, and for other activities by the general public. Over the last three years (2010 through 2012), an average of 1,556,184 people have visited the Children's Pool annually, and lifeguards have taken an average of 8,147 preventive actions and 86 water rescues annually (CASA, 2010; 2011; 2012).

The previous lifeguard facility at Children's Pool, built in 1967, was old, deteriorating from saltwater intrusion, and no longer served the needs of the lifeguard staff or the beach-going public. The structure was condemned on February 22, 2008 due to its deteriorated condition and lack of structural integrity. Because the existing building was no longer viable, a temporary lifeguard tower was moved in. However, a new lifeguard station is required to meet the needs of the lifeguards and the demand for lifeguard services.

The overall project includes the demolition of the existing lifeguard station and construction of a new, three-story, lifeguard station on the same site. Demolition and removal of the existing lifeguard station was completed in 2013 to 2014 and construction of the new lifeguard station is expected to be completed in 2015 to 2016. The building contractor utilized excavators, backhoes, concrete saws, and jackhammers for demolishing the previous structure and has hauled the waste materials to an offsite landfill where it was separated into recycled content and waste. During the second year of construction (2014 to 2015) and in the same footprint as the old lifeguard station, the new lifeguard station is being constructed within and adjacent to the previous facility. Rough plumbing and electrical have been laid; the foundation has been poured and some of the steel structure has been erected. The new lifeguard facility is in an optimal location to provide lifeguard service to the community. The new, three-story, building will contain a lower level with beach access level public restrooms and showers, lifeguard lockers, and sewage pump room; a second level with two work stations, ready/observation room, kitchenette, restroom, and first aid station; and a third "observation" level (with a 270°



view of the beach and nearby reef areas) with a single occupancy observation space, radio storage closet, and exterior catwalk. Interior stairs will link the floors. The existing below grade retaining walls will remain in place and new retaining walls will be constructed for a ramp from street level to the lower level for emergency vehicle beach access and pedestrian access to the lower level restrooms and showers. A 5.6 m (18.5 ft) wall will be located along the north end of the lower level. The walls will be designed for a minimum design life of 50 years and will not be undermined from ongoing coastal erosion. The walls will not be readily viewed from Coast Boulevard, the public sidewalks or the surrounding community. Enhanced paving, seating and viewing space, drinking fountains, adapted landscaping, and water efficient irrigation will also be included.

The City of San Diego has divided the demolition and construction activities are divided into phases:

(1.) Mobilization and temporary facilities;

(2.) Demolition and site clearing;

(3.) Site preparation and utilities;

(4.) Building foundation;

(5.) Building shell;

(6.) Building exterior;

(7.) Building interior;

(8.) Site improvements; and

(9.) Final inspection and demobilization.

Demolition and construction of the new lifeguard station was initially estimated to take approximately 7 months (148 actual demolition and construction days) and be completed by December 15, 2013; however, demolition and construction did not start until later than previously planned in June 2013 and June 2014 due to the presence of nesting migratory birds (*i.e.*, Western seagulls [*Larus occidentalis*] and eggs/chicks). There were additional unexpected delays in the demolition due to unforeseen underground structures at the site making it impossible to finish the project by December 15, 2013 or 2014. The City of San Diego completed phases 1 to 4 during 2013 and 2014. During the 2013 to 2014 construction window, the temporary on-site tower was removed and two temporary towers were installed nearby (one about 500 m [1,640.4 ft] south of the construction site and another about 1,000 m [3,280.8 ft] east of the construction site to serve citizens utilizing the beaches and ocean waters nearby. Construction of phases 5 to 9 will commence in June 2015, thereby necessitating a renewal of the previous IHA.

The notice of the final IHA for the City of San Diego's demolition and construction activities that was published in the **Federal Register** on July 8, 2013 (78 FR 40705) provides a detailed summary on phases 1 to 4 (*i.e.*, mobilization and temporary facilities, demolition and site clearing, site preparation and utilities, and building foundation). Phases 5 to 9 include (phases overlap in time):

(5.) *Building shell:*

Pre-cast concrete panel walls, panel walls, rough carpentry and roof framing, wall board, cable railing, metal flashing, and roofing.

Equipment—crane, truck, fork lift, and hand/power tools.

Timeframe—Approximately 35 days.

This phase will be completed in 2015 and has a maximum source level of 100 dB.

(6.) *Building exterior:*

Doors and windows, siding paint, light fixtures, and plumbing fixtures.

Equipment—truck, hand/power tools, and chop saw.

Timeframe—Approximately 4 weeks.

This phase will be completed in 2015 and has a maximum source level of 100 dB.

(7.) *Building interiors:*

Walls, sewage lift station, rough and finish mechanical electrical plumbing structural (MEPS), wall board, door frames, doors and paint.

Equipment—truck, hand/power tools, and chop saw.

Timeframe—Approximately 37 days.

This phase will be completed in 2015 and has a maximum source level of 100 dB.

(8.) *Site improvements:*

Modify storm drain, concrete seat walls, curbs, and planters, fine grade, irrigation, hardscape, landscape, hand rails, plaques, and benches.

Equipment—backhoe, truck, hand/power tools, concrete pump/truck, and fork lift.

Timeframe—Approximately 37 days.

This phase will be completed in 2015 and has a maximum source level of 110 dB.

(9.) *Final inspection and demobilization:*

System testing, remove construction equipment, inspection, and corrections.

Equipment—truck, and hand/power tools.

Timeframe—Approximately 41 days.

This phase will be completed in 2015 and has a maximum source level of 100 dB.

The exact dates of the planned activities depend on logistics and scheduling.

Sound levels during all phases of the project will not exceed 110 dB re 20  $\mu$ Pa

at five feet from the sound sources. The 110 dB estimate is based on equipment manufacturers' estimates obtained by the construction contractor. The City of San Diego utilized published or manufacturers' measurement data based on the planned equipment (*i.e.*, a backhoe, dump truck, cement pump, air compressor, electric screw guns, jackhammers, concrete saw, chop saw, and hand tools) to be utilized on the project site. Operation of the equipment is the primary activity within the range of construction activities that is likely to affect marine mammals by potentially exposing them to in-air (*i.e.*, airborne or sub-aerial) noise. During the working day, the City of San Diego estimates there will be sound source levels above 90 dB re 20  $\mu$ Pa, including 65 days of 100 to 110 dB re 20  $\mu$ Pa at the construction site.

On average, pinnipeds will be about 30.5 meters (m) (100 feet [ft]) or more from the construction site with a potential minimum of about 15.2 m (50 ft). During 2013 and 2014, measured sound levels from the demolition equipment reaching the pinnipeds did not exceed approximately 90 dB re 20  $\mu$ Pa at the haul-out area closest to the demolition and construction and a peak of about 83 dB re 20  $\mu$ Pa at the mean hauling-out distance (30.5 m). The City of San Diego used the formula and online calculator on the Web site: <http://sengpielaudio.com/calculator-distance.htm> and measured distances from the sound source to determine the area of potential impacts from in-air sound. Table 1 of the City of San Diego's monitoring report provides mean sound and mean distance from sound sources by the type of equipment and monitoring location. The City of San Diego intends to continue to measure in-air background noise levels in the days immediately prior to, during, and after the construction activities.

Additional details regarding the construction activities of the Children's Pool Lifeguard Station can be found in the City of San Diego's IHA application. The IHA application can also be found online at: <http://www.nmfs.noaa.gov/pr/permits/incidental/construction.htm>.

### Comments and Responses

A notice of preliminary determinations and proposed IHA for the City of San Diego's construction activities as published in the **Federal Register** on May 19, 2015 (80 FR 28588). During the 30-day public comment period, NMFS received comments from the Marine Mammal Commission (Commission) and one private citizen. The comments are posted online at: <http://www.nmfs.noaa.gov/pr/permits/>



*incidental/construction.htm*. Following are the substantive comments and NMFS's responses:

**Comment 1:** The Commission concurs with NMFS's preliminary findings and recommends that NMFS issue the requested IHA, subject to inclusion of the proposed mitigation, monitoring, and reporting measures.

**Response:** NMFS concurs with the Commission's recommendation and has issued the IHA to the City of San Diego.

**Comment 2:** One private citizen did not oppose the issuance of an IHA by NMFS and the conduct of the construction activities at the Children's Pool Lifeguard Station at La Jolla, CA. The commenter provided many descriptions and photographs of the public viewing and interacting with Pacific harbor seals on the beach and in the water at the Children's Pool. Also, the commenter provided behavioral descriptions of harbor seals and how they may be acclimated to human presence and noise at this site. Many of the commenter's statements were not germane to the proposed IHA or have not identified or provided scientific

publications supporting their statement which limits our ability to respond to commenter's statements.

**Response:** As described in detail in the notice of the proposed IHA (80 FR 28588, May 19, 2015), as well as in this document, NMFS does not believe the City of San Diego's construction activities will cause injury, serious injury, or mortality to marine mammals, and no take by injury, serious injury, or mortality is authorized. The required monitoring and mitigation measures that the City of San Diego will implement during the construction activities will further reduce the potential impacts on marine mammals to the lowest level practicable. NMFS anticipates only behavioral disturbance to occur during the conduct of the construction activities at the Children's Pool Lifeguard Station in La Jolla, CA.

#### Description of Marine Mammals in the Specified Geographic Area of the Specified Activity

Three species of pinnipeds are known to or could occur in the Children's Pool planned action area and off the Pacific

coastline (see Table 1 below). Pacific harbor seals, California sea lions, and northern elephant seals are the three species of marine mammals that occur and are likely to be found within the immediate vicinity of the activity area. Therefore, these three species are likely to be exposed to effects of the specified activities. A variety of other marine mammals have on occasion been reported in the coastal waters off southern California. These include gray whales, killer whales, bottlenose dolphins, Steller sea lions, northern fur seals, and Guadalupe fur seals. However, none of these species have been reported to occur in the immediate action area of the Children's Pool beach. Therefore, NMFS does not expect, and is not authorizing, incidental take of other marine mammal species from the specified activities. Table 1 below identifies the cetacean and pinnipeds species, their habitat, occurrence, range, abundance, and conservation status in the nearshore area of the general region of the project area.

TABLE 1—THE HABITAT, OCCURRENCE, RANGE, ABUNDANCE, AND CONSERVATION STATUS OF MARINE MAMMALS INHABITING THE GENERAL REGION OF THE ACTION AREA IN THE PACIFIC OCEAN OFF THE SOUTHERN COAST OF CALIFORNIA

Species	Habitat	Occurrence	Range	Best population estimate (minimum) <sup>1</sup>	ESA <sup>2</sup>	MMPA <sup>3</sup>
Mysticetes: Gray whale ( <i>Eschrichtius robustus</i> ).	Coastal and shelf.	Transient during season migrations.	North Pacific Ocean, Gulf of California to Arctic—Eastern North Pacific stock.	20,990 (20,125) .....	DL—Eastern Pacific stock. EN—Western Pacific stock.	NC—Eastern North Pacific stock D—Western North Pacific stock.
Odontocetes: Killer whale ( <i>Orcinus orca</i> ).	Widely distributed.	Varies on inter-annual basis.	Cosmopolitan .....	354 (354)—West Coast Transient stock.	NL ..... EN—Southern resident population.	NC D—Southern Resident and AT1 Transient populations.
Bottlenose dolphin ( <i>Tursiops truncatus</i> ).	Offshore, inshore, coastal, estuaries.	Limited, small population within 1 km of shore.	Tropical and temperate waters between 45° North and South.	323 (290)—California Coastal stock.	NL .....	NC.
Long-beaked common dolphin ( <i>Delphinus capensis</i> ).	Inshore .....	Common, more inshore distribution, year-round presence.	Nearshore and tropical waters.	107,016 (76,224)—California stock.	NL .....	NC.
Pinnipeds: Pacific harbor seal ( <i>Phoca vitulina richardii</i> ).	Coastal .....	Common .....	Coastal temperate to polar regions in Northern Hemisphere.	30,968 (27,348)—California stock.	NL .....	NC.
Northern elephant seal ( <i>Mirounga angustirostris</i> ).	Coastal, pelagic when not migrating.	Common .....	Eastern and Central North Pacific—Alaska to Mexico.	179,000 (81,368)—California breeding stock.	NL .....	NC.

TABLE 1—THE HABITAT, OCCURRENCE, RANGE, ABUNDANCE, AND CONSERVATION STATUS OF MARINE MAMMALS INHABITING THE GENERAL REGION OF THE ACTION AREA IN THE PACIFIC OCEAN OFF THE SOUTHERN COAST OF CALIFORNIA—Continued

Species	Habitat	Occurrence	Range	Best population estimate (minimum) <sup>1</sup>	ESA <sup>2</sup>	MMPA <sup>3</sup>
California sea lion ( <i>Zalophus californianus</i> ).	Coastal, shelf	Common .....	Eastern North Pacific Ocean—Alaska to Mexico.	296,750 (153,337)—U.S. stock.	NL .....	NC.
Steller sea lion ( <i>Eumetopias jubatus</i> ).	Coastal, shelf	Rare .....	North Pacific Ocean—Central California to Korea.	72,223 (52,847)—Eastern U.S. stock.	DL—Eastern U.S. stock. EN—Western U.S. stock. NL .....	D.
Northern fur seal ( <i>Callorhinus ursinus</i> ).	Pelagic, off-shore.	Rare .....	North Pacific Ocean—Mexico to Japan.	12,844 (6,722)—California stock.	NL .....	NC—California stock.
Guadalupe fur seal ( <i>Arctocephalus townsendi</i> ).	Coastal, shelf	Rare .....	California to Baja California, Mexico.	7,408 (3,028)—Mexico to California.	T .....	D.

NA = Not available or not assessed.

<sup>1</sup> NMFS Marine Mammal Stock Assessment Reports.

<sup>2</sup> U.S. Endangered Species Act: EN = Endangered, T = Threatened, DL = Delisted, and NL = Not listed.

<sup>3</sup> U.S. Marine Mammal Protection Act: D = Depleted, S = Strategic, and NC = Not classified.

The rocks and beaches at or near the Children's Pool in La Jolla, CA, are almost exclusively Pacific harbor seal hauling-out sites. On infrequent occasions, one or two California sea lions or a single juvenile northern elephant seal have been observed on the sand or rocks at or near the Children's Pool (*i.e.*, breakwater ledge/rocks haul-out area, reef haul-out area, and Casa Beach haul-out area). These sites are not usual haul-out locations for California sea lions and/or northern elephant seals. The City of San Diego commissioned two studies of harbor seal abundance trends at the Children's Pool. Both studies reported that appearances of California sea lions and northern elephant seals are infrequent, but not rare at Children's Pool (Yochem and Stewart, 1998; Hanan, 2004; Hanan & Associates, 2011). During 2013, the City of San Diego observed one juvenile and three adult California sea lions and two juvenile northern elephant seals at the Children's Pool. During 2014, the City of San Diego observed 22 California sea lions (during 19 days) and 30 juvenile elephant seals (during 29 days) at the Children's Pool. Adult sea lions were also observed hauling out on rocks and cliffs near the Children's Pool.

#### *Pacific Harbor Seal*

Harbor seals are widely distributed in the North Atlantic and North Pacific. Two subspecies exist in the Pacific Ocean: *P. v. stejnegeri* in the western North Pacific near Japan, and *P. v. richardii* in the eastern North Pacific. The subspecies in the eastern North Pacific Ocean inhabits near-shore coastal and estuarine areas from Baja

California, Mexico, to the Pribilof Islands in Alaska. These seals do not make extensive pelagic migrations, but do travel 300 to 500 kilometers (km) (162 to 270 nautical miles [nmi]) on occasion to find food or suitable breeding areas (Herder, 1986; Harvey and Goley, 2011). Previous assessments of the status of harbor seals have recognized three stocks along the west coast of the continental U.S.: (1) California, (2) Oregon and Washington outer coast waters, and (3) inland waters of Washington. An unknown number of harbor seals also occur along the west coast of Baja California, at least as far south as Isla Asuncion, which is about 100 miles south of Punta Eugenia. Animals along Baja California are not considered to be a part of the California stock because it is not known if there is any demographically significant movement of harbor seals between California and Mexico and there is no international agreement for joint management of harbor seals. Harbor seal presence at haul-out sites is seasonal with peaks in abundance during their pupping and molting periods. Pupping and molting periods are first observed to the south and progress northward up the coast with time (*e.g.*, January to May near San Diego, April to June in Oregon and Washington) (Jeffries, 1984; Jeffries, 1985; Huber *et al.*, 2001; Hanan, 2004; Hanan & Associates, 2011).

In California, approximately 400 to 600 harbor seal haul-out sites are distributed along the mainland coast and on offshore islands, including intertidal sandbars and ledges, rocky shores and islets, and beaches (Harvey *et al.*, 1995; Hanan, 1996; Lowry *et al.*,

2008). Preferred haul-out sites are those that are protected from the wind and waves, and allow access to deep water for foraging (Perrin *et al.*, 2008). Of the known haul-out sites, 14 locations are rookeries (2 locations have multiple sites, for a total of 17 sites) on or near the mainland of California. The population of harbor seals has grown off the U.S. west coast and has led to new haul-out sites being used in California (Hanan, 1996). Harbor seals are one of the most common and frequently observed marine mammals along the coastal environment.

Harbor seals have been observed hauling-out and documented giving birth at the Children's Pool since the 1990's (Yochem and Stewart, 1998; Hanan & Associates, 2004). Pacific harbor seals haul-out year-round on beaches and rocks (*i.e.*, breakwater ledge/rocks haul-out area, reef haul-out area, and Casa Beach haul-out area) below the lifeguard tower at Children's Pool. According to Yochem (2005), the Children's Pool beach site is used by harbor seals at all hours of the day and at all tides with the exception of occasional high tide/high swell events in which the entire beach is awash. It is one of the three known haul-out sites for this species in San Diego County. These animals have been observed in this area moving to/from the Children's Pool, exchanging with the rocky reef directly west of and adjacent to the breakwater and with Seal Rock, which is about 150 m (492 ft) west of the Children's Pool. Harbor seals have also been reported on the sandy beach just southwest of the Children's Pool. At low tide, additional space for hauling-out is available on the

rocky reef areas outside the retaining wall and on beaches immediately southward. Haul-out times vary by time of year, from less than an hour to many hours. There have been no foraging studies at this site, but harbor seals have been observed in nearshore waters and kelp beds nearby, including La Jolla Cove.

The Children's Pool area is the only rookery in San Diego County and the only mainland rookery on the U.S. west coast between the border of Mexico and Point Mugu in Ventura County, CA (321.9 km [200 miles]). The number of harbor seals in this area has increased since 1979, and seals are documented to give birth on these beaches during December through May (Hanan, 2004; Hanan & Associates, 2011). The official start to pupping season is December 15. Females in an advanced stage of pregnancy begin to show up on the Children's Pool beach by late October to early November. Several studies have identified harbor seal behavior and estimated harbor seal numbers including patterns of daily and seasonal area use (Yochem and Stewart, 1998; Hanan & Associates, 2011; Linder, 2011). Males, females, and pups (in season) of all ages and stages of development are observed at the Children's Pool and adjacent areas.

In southern California, a considerable amount of information is known about the movements and ecology of harbor seals, but population structure in the region is not as well known (Stewart and Yochem, 1994, 2000; Keper *et al.*, 2005; Hanan & Associates, 2011). Linder (2011) suggests that this population moves along the California coast and the beach at Children's Pool is part of a "regional network of interconnected" haul-out and pupping sites. Harbor seals often haul-out in protected bays, inlets, and beaches (Reeves *et al.*, 1992). At and near the Children's Pool, harbor seals haul-out on the sand, rocks, and breakwater base in numbers of 0 to 15 harbor seals to a maximum of about 150 to 250 harbor seals depending on the time of day, season, and weather conditions (Hanan, 2004; Hanan & Associates, 2011; Linder, 2011). Because space is limited behind the breakwater at the Children's Pool, Linder (2011) predicted that it is unlikely that numbers will exceed 250 harbor seals. Based on monitoring from a camera, Western Alliance for Nature (WAN) reported that during the month of May 2013 up to 302 harbor seals were documented resting on the Children's Pool beach at any given time, with additional harbor seals on the rocks and in the water (Wan, personal communication). Almost every day,

except for weekends, over 250 individual harbor seals were present on the beach. During the months of September 2012 to January 2013, the average number of harbor seals on the beach varied from 83 to 120 animals before people entered the beach or when people were behind the rope. During this same period, when people were on the beach and/or across the rope, the average number of harbor seals varied from 7 to 27. The City of San Diego observed 12 counts totaling more than 200 and a maximum of 238 animals during the 2014 to 2015 construction window. The weather (*i.e.*, wind and/or rain) and the proximity of humans to the beach likely affect the presence of harbor seals on the beach.

Radio-tagging and photographic studies have revealed that only a portion of seals utilizing a hauling-out site are present at any specific moment or day (Hanan, 1996, 2005; Gilbert *et al.*, 2005; Harvey and Goley, 2011; and Linder, 2011). These radio-tagging studies indicate that harbor seals in Santa Barbara County haul-out about 70 to 90% of the days annually (Hanan, 1996). The City of San Diego expects harbor seals to behave similarly at the Children's Pool. Tagged and branded harbor seals from other haul-out sites have been observed by Dr. Hanan at the Children's Pool. For example, harbor seals with red-stained heads and coats, which are typical of some harbor seals in San Francisco Bay have been observed at Children's Pool, indicating that seals tagged at other locations and haul-out sites visit the site. A few seals have been tagged at the Children's Pool and there are no reports of these tagged animals at other sites (probably because of very low re-sighting efforts and a small sample size [10 individuals radio-tagged]), which may indicate a degree of site-fidelity (Yochem and Stewart, 1998). These studies further indicate that seals are constantly moving along the coast including to/from the offshore islands and that there may be as many as 600 individual harbor seals using Children's Pool during a year, but certainly not all at one time.

The City of San Diego has fitted a polynomial curve to the number of expected harbor seals hauling-out at the Children's Pool by month (see Figure 1 of the IHA application and Figure 2 below) based on counts at the Children's Pool by Hanan (2004), Hanan & Associates (2011), Yochem and Stewart (1998), and the Children's Pool docents (Hanan, 2004). A three percent annual growth rate of the population was applied to Yochem and Stewart (1998) counts to normalize them to Hanan & Associates and docent counts in 2003 to

2004. Based on monitoring during 2013 to 2014, Dr. Hanan estimates that similar numbers of harbor seals hauling-out at Children's Pool during 2011 and will expect similar numbers in 2015 to 2016.

A complete count of all harbor seals in California is impossible because some are always away from the haul-out sites. A complete pup count (as is done for other pinnipeds in California) is also not possible because harbor seals are precocial, with pups entering the water almost immediately after birth. Population size is estimated by counting the number of seals ashore during the peak haul-out period (May to July) and by multiplying this count by a correction factor equal to the inverse of the estimated fraction of seals on land. Based on the most recent harbor seal counts (2009) and including a revised correction factor, the estimated population of harbor seals in California is 30,196 individuals (NMFS, 2011), with an estimated minimum population of 26,667 for the California stock of harbor seals. Counts of harbor seals in California increased from 1981 to 2004. The harbor seal is not listed under the ESA and the California stock is not considered depleted or strategic under the MMPA (Carretta *et al.*, 2010).

#### *California Sea Lion*

The California sea lion is a full species, separate from the Galapagos sea lion (*Zalophus wolfebaeki*) and the extinct Japanese sea lion (*Zalophus japonicus*) (Brunner, 2003; Wolf *et al.*, 2007; Schramm *et al.*, 2009). This species of sea lion is found from southern Mexico to southwestern Canada. The breeding areas of the California sea lion are on islands located in southern California, western Baja California, and the Gulf of California. A genetic analysis of California sea lions identified five genetically distinct geographic populations: (1) Pacific Temperate, (2) Pacific Subtropical, (3) Southern Gulf of California, (4) Central Gulf of California, and (5) Northern Gulf of California (Schramm *et al.*, 2009). In that study, the Pacific Temperate population included rookeries within U.S. waters and the Coronados Islands just south of U.S./Mexico border. Animals from the Pacific Temperate population range north into Canadian waters, and movement of animals between U.S. waters and Baja California waters has been documented, though the distance between the major U.S. and Baja California rookeries is at least 740.8 km (400 nmi). Males from western Baja California rookeries may spend most of the year in the United States.

The entire California sea lion population cannot be counted because all age and sex classes are never ashore at the same time. In lieu of counting all sea lions, pups are counted during the breeding season (because this is the only age class that is ashore in its entirety), and the numbers of births is estimated from the pup count. The size of the population is then estimated from the number of births and the proportion of pups in the population. Censuses are conducted in July after all pups have been born. There are no rookeries at or near the Children's Pool, although in the past two years births have been reported at La Jolla Cove (about 0.75 km [0.47 miles] east of Children's Pool). Population estimates for the U.S. stock of California sea lions range from a minimum of 153,337 to an average estimate of 296,750 animals. They are considered to be at carrying capacity of the environment. The California sea lion is not listed under the ESA and the U.S. stock is not considered depleted or strategic under the MMPA.

#### *Northern Elephant Seal*

Northern elephant seals breed and give birth in California (U.S.) and Baja California (Mexico), primarily on offshore islands (Stewart *et al.*, 1994) from December to March (Stewart and Huber, 1993). Spatial segregation in foraging areas between males and females is evident from satellite tag data (Le Boeuf *et al.*, 2000). Males migrate to the Gulf of Alaska and western Aleutian Islands along the continental shelf to feed on benthic prey, while females migrate to pelagic areas in the Gulf of Alaska and the central North Pacific to feed on pelagic prey (Le Boeuf *et al.*, 2000). Adults return to land between March and August to molt, with males returning later than females. Adults return to their feeding areas again between their spring/summer molting and their winter breeding seasons.

Populations of northern elephant seals in the U.S. and Mexico have recovered after being nearly hunted to extinction (Stewart *et al.*, 1994). Northern elephant seals underwent a severe population bottleneck and loss of genetic diversity when the population was reduced to an estimated 10 to 30 individuals (Hoelzel *et al.*, 2002). However, movement and genetic exchange continues between rookeries when they start breeding (Huber *et al.*, 1991). The California breeding population is now demographically isolated from the Baja California population. The California breeding population is considered in NMFS's stock assessment report to be a separate stock.

A complete population count of elephant seals is not possible because all age classes are not ashore simultaneously. Elephant seal population size is typically estimated by counting the number of pups produced and multiplying by the inverse of the expected ratio of pups to total animals (McCann, 1985). Based on counts of elephant seals at U.S. rookeries in 2010, Lowry *et al.* (2014) reported that 40,684 pups were born. Lowry *et al.* (2014) applied a multiplier of 4.4 to extrapolate from total pup counts to a population estimate of approximately 179,000 elephant seals. This multiplier is derived from life tables based on published elephant seal fecundity and survival rates, and reflects a population with approximately 23% pups (Cooper and Stewart, 1983; Le Boeuf and Reiter, 1988; Hindell 1991; Huber *et al.*, 1991; Reiter and Le Boeuf, 1991; Clinton and Le Boeuf, 1993; Le Boeuf *et al.*, 1994; Pistorius and Bester, 2002; McMahon *et al.*, 2003; Pistorius *et al.*, 2004; Condit *et al.*, 2014). The minimum population size for northern elephant seals in 2010 can be estimated very conservatively as 81,368, which is equal to twice the observed pup count (to account for the pups and their mothers). The population is reported to have grown at 3.8% annually since 1988 (Lowry *et al.*, 2014). Northern elephant seals are not listed under the ESA and are not considered as depleted or a strategic stock under the MMPA.

Further information on the biology and local distribution of these marine mammal species and others in the region can be found in the City of San Diego's IHA application, which is available upon request (see **ADDRESSES**), and the NMFS Marine Mammal Stock Assessment Reports, which are available online at: <http://www.nmfs.noaa.gov/pr/sars/>.

#### **Potential Effects of the Specified Activity on Marine Mammals**

This section includes a summary and discussion of the ways that the types of stressors associated with the planned specified activity (e.g., construction equipment and activities) have been observed to impact marine mammals. This discussion may also include reactions that we consider to rise to the level of a take and those that we do not consider to rise to the level of take (for example, with acoustics), we may include a discussion of studies that showed animals not reacting at all to sound or exhibiting barely measureable avoidance). This section is intended as a background of potential effects and does not consider either the specific manner in which this activity will be

carried out or the mitigation that will be implemented, or how either of those will shape the anticipated impacts from this specific activity. The "Estimated Take by Incidental Harassment" section later in this document will include a quantitative analysis of the number of individuals that are expected to be taken by this activity. The "Negligible Impact Analysis" section will include the analysis of how this specific activity will impact marine mammals and will consider the content of this section, the "Estimated Take by Incidental Harassment" section, the "Mitigation" section, and the "Anticipated Effects on Marine Mammal Habitat" section to draw conclusions regarding the likely impacts of this activity on the reproductive success or survivorship of individuals and from that on the affected marine mammal populations or stocks.

When considering the influence of various kinds of sound on the marine environment, it is necessary to understand that different kinds of marine life are sensitive to different frequencies of sound. Based on available behavioral data, audiograms have been derived using auditory evoked potentials, anatomical modeling, and other data, Southall *et al.* (2007) designate "functional hearing groups" for marine mammals and estimate the lower and upper frequencies of functional hearing of the groups. The functional groups and the associated frequencies are indicated below (though animals are less sensitive to sounds at the outer edge of their functional range and most sensitive to sounds of frequencies within a smaller range somewhere in the middle of their functional hearing range):

- Low-frequency cetaceans (13 species of mysticetes): functional hearing is estimated to occur between approximately 7 Hz and 30 kHz;
- Mid-frequency cetaceans (32 species of dolphins, six species of larger toothed whales, and 19 species of beaked and bottlenose whales): functional hearing is estimated to occur between approximately 150 Hz and 160 kHz;
- High-frequency cetaceans (eight species of true porpoises, six species of river dolphins, *Kogia* spp., the franciscana (*Pontoporia blainvillei*), and four species of cephalorhynchids): functional hearing is estimated to occur between approximately 200 Hz and 180 kHz; and
- Phocid pinnipeds in water: functional hearing is estimated to occur between approximately 75 Hz and 100 kHz;

- Otariid pinnipeds in water: functional hearing is estimated to occur between approximately 100 Hz and 40 kHz.

As mentioned previously in this document, 3 marine mammal species (0 cetacean and 3 pinniped species) are likely to occur in the planned action area. Of the 3 pinniped species likely to occur in the City of San Diego's planned action area, 2 are classified as phocid pinnipeds (*i.e.*, Pacific harbor seal and northern elephant seal) and, 1 is classified as an otariid pinniped (*i.e.*, California sea lion) (Southall *et al.*, 2007). The City of San Diego requests authorization for Level B harassment of these 3 species of marine mammals (*i.e.*, Pacific harbor seals, California sea lions, and northern elephant seals) incidental to the use of equipment and its propagation of in-air noise from various acoustic mechanisms associated with the construction activities of the Children's Pool Lifeguard Station at La Jolla, CA discussed above. NMFS considers a species' functional hearing group when we analyze the effects of exposure to sound on marine mammals.

The notice of the proposed IHA (79 FR 8160, February 11, 2014) included a discussion of the effects of in-air sounds from construction activities on pinnipeds, which included tolerance, behavioral disturbance, and hearing impairment. NMFS refers readers to the City of San Diego's IHA application and NMFS's EA for additional information on the behavioral reactions (or lack thereof) by all types of marine mammals to high levels of in-air sounds.

The potential effects to marine mammals described in this section of the document generally do not take into consideration the monitoring and mitigation measures described later in this document (see the "Mitigation" and "Monitoring and Reporting" sections), which are designed to effect the least practicable impact on affected marine mammal species or stocks.

#### Anticipated Effects on Marine Mammal Habitat

The rocks and beaches at or near the Children's Pool in La Jolla, CA, are almost exclusively Pacific harbor seal hauling-out sites. Harbor seals have been observed hauling-out and documented giving birth at the Children's Pool since the 1990's (Yochem and Stewart, 1998; Hanan & Associates, 2004). It is one of the three known haul-out sites for this species in San Diego County and is the only rookery in San Diego County and the only mainland rookery on the U.S. west coast between the border of Mexico and Point Mugu in Ventura County, CA.

More information on this population of Pacific harbor seals can be found in the "Description of Marine Mammals in the Specified Geographic Area of the Specified Activity."

The primary anticipated adverse impacts upon habitat consist of temporary changes to the in-air acoustic environment, as detailed in the notice of the proposed IHA (79 FR 8160, February 11, 2014). These changes are minor, temporary, and limited in duration to the period of the construction activities. The temporary impacts on the acoustic environment are not expected to have any permanent effects on the species or stock populations of marine mammals occurring at the Children's Pool.

All construction activities are beyond or outside the habitat areas where harbor seals and other pinnipeds are found. Visual barriers will be erected to shield construction activities from the visual perception and potentially dampen acoustic effects on pinnipeds. Because the public occasionally harasses the harbor seals with various activities, the NMFS-qualified PSO monitoring the site will make observations and attempt to distinguish and attribute any observed harassment to the public or to the construction activities and give all details in the observation report. If any short-term, temporary impacts to habitat due to sounds or visual presence of equipment and workers did occur, the City of San Diego will expect pinniped behavior to return to pre-construction conditions soon after the activities are completed, which is anticipated to occur before the next pupping season (Hanan & Associates, 2011).

The area of habitat affected is small and the effects are localized and temporary; thus there is no reason to expect any significant reduction in habitat available for foraging and other habitat uses. No aspect of the project is anticipated to have any permanent effect on the location or use of pinniped haul-outs or related habitat features in the area (Hanan & Associates, 2011). Further, the site is already very disturbed by member of the public who come to the area during the day and night to view the pinnipeds. The City of San Diego and NMFS do not project any loss or modification of physical habitat for these species. Any potential temporary loss or modification of habitat due to in-air noise or visual presence of equipment and workers during the construction activities is expected by the City of San Diego and NMFS to be quickly restored after construction activities end and all equipment and barriers are removed.

For these reasons, NMFS anticipates that the action will result in no impacts to marine mammal habitat beyond rendering the areas immediately around the Children's Pool less desirable during construction activities.

#### Mitigation

In order to issue an Incidental Take Authorization (ITA) under section 101(a)(5)(D) of the MMPA, NMFS must prescribe, where applicable, the permissible methods of taking pursuant to such activity, and other means of effecting the least practicable impact on such species or stock and its habitat, paying particular attention to rookeries, mating grounds, and areas of similar significance, and on the availability of such species or stock for taking for certain subsistence uses (where relevant).

The City of San Diego has established the Children's Pool as a shared beach for pinnipeds and people (except during pupping season when the beach has been closed to the public). In the past, during the pupping season, a rope was placed along the upper part of the beach with signage to inform and designate how close people can come to the haul-out area and the pinnipeds. The timeframe for the rope has been extended so that it is now present year-round. The construction activities are planned to occur outside the harbor seal pupping and weaning periods.

The City of San Diego will implement the following mitigation measures to help ensure the least practicable impact on marine mammals:

- (1) Prohibition of construction during pupping season;
- (2) Daily construction timing;
- (3) Construction of visual and acoustic barriers;
- (4) Use of Protected Species Observers;
- (5) Establishment of buffer zones; and
- (6) Potential abandonment survey.

Visual and acoustic barriers were constructed in 2013 to mitigate the effects of the construction activities. The visual and acoustic barriers were constructed of plywood, 1.2 to 2.4 m (4 to 8 ft) tall stood on end and held up by wood posts. The sheets of plywood were stood upright and held up with two wooden two by fours hinged to the top of the frame, so they could be collapsed and moved depending on the location and need for access by demolition and construction equipment. The barriers were placed at the site with input from NMFS Southwest Regional Office (SWRO) personnel so that they will hide as advantageously as possible the construction activities that may be seen by pinnipeds. The barriers appear

to dampen the acoustic sound sources, but do not prevent sound from permeating the environment. The barriers also appear to hide and reduce visual cues that may stimulate behavioral reactions from the pinnipeds on the beach below. As the site is a beach with construction along the cliff and on flat areas above the cliff, a complete barrier cannot be constructed to hide all construction activities for the project. Once the walls of the lifeguard station's building are in place, much of the construction activities will take place above the Children's Pool beach (*i.e.*, out of sight) as well as inside the building (*i.e.*, a visual and partial sound barrier). There will be no activities in the ocean or closer to the water's edge and since harbor seals mate underwater in the ocean, there will be no impacts on mating activities. California sea lions and northern elephant seals are such infrequent users of this area and their rookeries are so far away (at least 104.6 km [65 miles] at offshore islands) that there will be no adverse impact on these species.

As part of the public comment process for the issuance of the previous 2013 IHA, NMFS modified several of the monitoring and mitigation measures included in the proposed IHA (78 FR 25958, May 3, 2013) for practicability reasons, and also included several additional measures in the final IHA (78 FR 40705, July 8, 2013). These included changing the pupping season from December 15th to May 15th and prohibiting construction activities during this time; extending construction activities from 7:00 a.m. to 7:00 p.m. to help assure that more work will be completed during the 2013 construction window; continuing monitoring for 60 days following the end of construction activities; and triggering a shut-down of construction activities in the unexpected event of abandonment of the Children's Pool site. The mitigation measure on scheduling the heaviest construction activities (with the highest sound levels) during the annual period of lowest haul-out occurrence (October to November) was originally included in the City of San Diego's Mitigated Negative Declaration when it was anticipated that the City of San Diego would obtain an IHA in the summer of 2012 and begin demolition and construction activities in the fall of 2012. This requirement has been removed because it is no longer practicable due to logistics, scheduling and to allow the planned activities to be completed before the next pupping season.

The activities planned by the applicant includes a variety of measures

calculated to minimize potential impacts on marine mammals, including:

#### *Prohibition of Construction During Pupping Season*

Construction shall be prohibited during the Pacific harbor seal pupping season (December 15th to May 15th) and for an additional two weeks thereafter to accommodate lactation and weaning of late season pups. Thus, construction shall be prohibited from December 15th to June 1st.

#### *Daily Construction Timing*

Construction activities shall be scheduled, to the maximum extent practicable, during the daily period of lowest haul-out occurrence, from approximately 8:30 a.m. to 3:30 p.m. However, construction activities may be extended from 7 a.m. to 7 p.m. to help assure that the project can be completed during the 2015 construction window. Harbor seals typically have the highest daily or hourly haul-out period during the afternoon from 3 p.m. to 6 p.m.

#### *Construction of Visual and Acoustic Barriers*

A visual and acoustic barrier will be erected and maintained for the duration of the project to shield construction activities from beach view. The temporary barrier shall consist of 1/2 to 3/4 inch (1.3 to 1.9 centimeters [cm]) plywood constructed 1.8 to 2.4 m (6 to 8 ft) high depending on the location. The City of San Diego does not believe that a complete barrier can be constructed to hide all of the construction activities. Once the walls of the lifeguard station building are in place, much of the construction activities will take place on the bluff above the beach (thus out of sight) and inside the building, which will provide a visual and partial sound barrier.

#### *Protected Species Observers*

Trained PSO's will be used to detect, document, and minimize impacts (*i.e.*, possible shut-down of noise-generating operations [turning off the equipment so that in-air sounds associated with construction no longer exceed levels that are potentially harmful to marine mammals]) to marine mammals. More information about this measure is contained in the "Monitoring" section (below).

#### *Establishment of Buffer Zones*

The City of San Diego shall establish buffer zones (*i.e.*, where sound pressure levels are at or above 90 dB re 20  $\mu$ Pa for harbor seals and/or at or above 100 dB re 20  $\mu$ Pa for all pinniped species except harbor seals [for in-air noise])

around the construction activities so that in-air sounds associated with the construction activities no longer exceed levels that are potentially harmful to marine mammals.

#### *Timing Constraints for In-Air Noise*

To minimize in-air noise impacts on marine mammals, construction activities shall be limited to the period when the species of concern will be least likely to be in the project area. The construction window for construction activities shall be from June 1 to December 15, 2015. The IHA may extend to June 1 through June 27, 2016 to finish the construction activities if needed. Avoiding periods when the highest number of marine mammal individuals are in the action area is another mitigation measure to protect marine mammals from the construction activities.

#### *Potential Abandonment Survey*


After the first two months of monitoring during construction activities, the City of San Diego will take the mean number of observed harbor seals at the Children's Pool in a 24-hour period across that two months and compare it to the mean of the lower 95 percent confidence interval in Figure 1 (see below). If the observed mean is lower, the City of San Diego will shut-down construction activities and work with NMFS and other harbor seal experts (*e.g.*, Mark Lowry, Dr. Sarah Allen, Dr. Pamela Yochem, and/or Dr. Brent Stewart) to develop and implement a revised mitigation plan to further reduce the number of takes and potential impacts. Once a week every week thereafter, the City of San Diego will take the same mean of observed harbor seals across the previous three tide cycles (a tide cycle is approximately 2 weeks) and compare it to the 95% lower confidence interval in Figure 1 for the same time period. If the observed mean is lower, the City of San Diego will shut-down and take the action described above. If abandonment of the site is likely, monitoring will be expanded away from the Children's Pool to determine if animals have been temporarily displaced to known haul-out sites in the southern California area (*e.g.*, north end of Torrey Pines, cave on the exposed ocean side of Point Loma, etc.). For the purpose of this action, NMFS will consider the Children's Pool site to possibly be abandoned if zero harbor seals are present each day during the daytime and nighttime hours for at least three tide cycles (a tide cycle is approximately 2 weeks), but this cannot be confirmed until observations

continue to be zero during a full pupping and molting season.

Figure 1. Estimated total harbor seals by month based on counts at the site by

Hanan & Associates, Yochem and Stewart, and Children's Pool docents. The polynomial curve fits to counts by months, which includes the projected

mean as well as the upper 95% and lower 95% confidence intervals, was used to estimate harbor seals expected to be hauled-out by day.

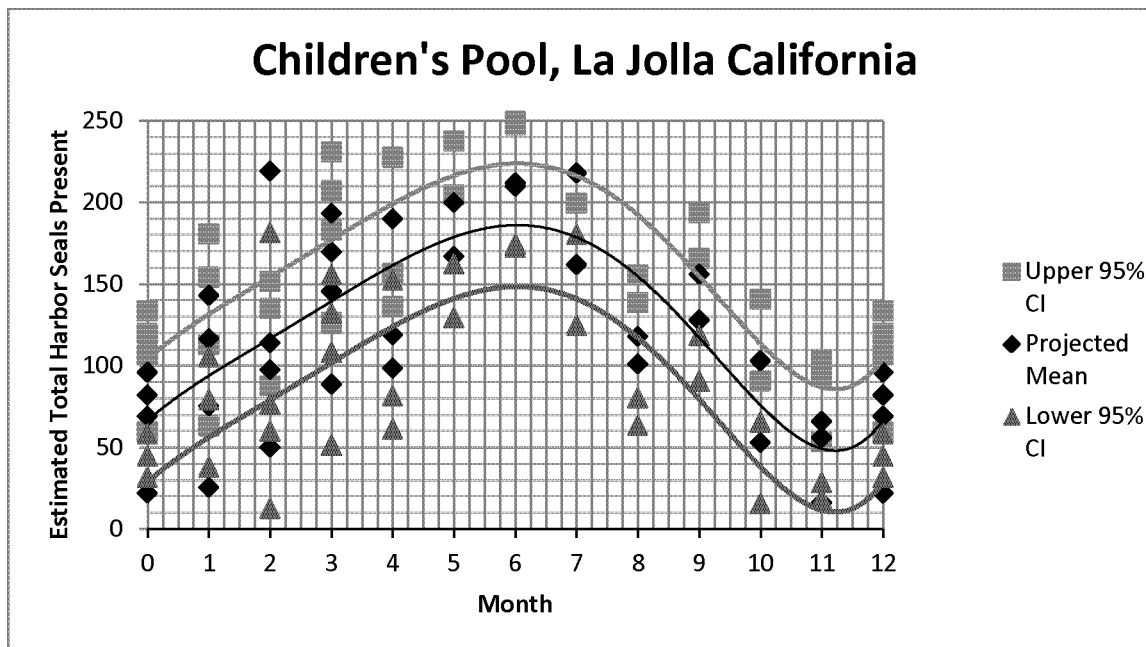

More information regarding the City of San Diego's monitoring and mitigation measures for the planned construction activities at the Children's Pool Lifeguard Station can be found in the IHA application.

#### *Mitigation Conclusions*

NMFS has carefully evaluated the applicant's mitigation measures and considered a range of other measures in the context of ensuring that NMFS prescribes the means of effecting the least practicable impact on the affected marine mammal species and stocks and their habitat. NMFS's evaluation of potential measures included consideration of the following factors in relation to one another:

- The manner in which, and the degree to which, the successful implementation of the measure is expected to minimize adverse impacts to marine mammals;
- The proven or likely efficacy of the specific measure to minimize adverse impacts as planned; and
- The practicability of the measure for applicant implementation, including consideration of personnel safety, practicality of implementation, and impact on the effectiveness of the activity.

Any mitigation measure(s) prescribed by NMFS should be able to accomplish, have a reasonable likelihood of accomplishing (based on current

science), or contribute to the accomplishment of one or more of the general goals listed below:

(1) Avoidance or minimization of injury or death of marine mammals wherever possible (goals 2, 3, and 4 may contribute to this goal).

(2) A reduction in the numbers of marine mammals (total number or number at biologically important time or location) exposed to received levels from construction equipment, or other activities expected to result in the take of marine mammals (this goal may contribute to 1, above, or to reducing harassment takes only).

(3) A reduction in the number of times (total number or number at biologically important time or location) individuals would be exposed to received levels from construction equipment, or other activities expected to result in the take of marine mammals (this goal may contribute to 1, above, or to reducing harassment takes only).

(4) A reduction in the intensity of exposures (either total number or number at biologically important time or location) to received levels from construction equipment, or other activities expected to result in the take of marine mammals (this goal may contribute to a, above, or to reducing the severity of harassment takes only).

(5) Avoidance of minimization of adverse effects to marine mammal habitat, paying special attention to the

food base, activities that block or limit passage to or from biologically important areas, permanent destruction of habitat, or temporary destruction/disturbance of habitat during a biologically important time.

(6) For monitoring directly related to mitigation—an increase in the probability of detecting marine mammals, thus allowing for more effective implementation of the mitigation.

Based on NMFS's evaluation of the applicant's measures, as well as other measures considered by NMFS or recommended by the public, NMFS has determined that the mitigation measures provide the means of effecting the least practicable impact on marine mammal species or stocks and their habitat, paying particular attention to rookeries, mating grounds, and areas of similar significance.

#### **Monitoring and Reporting**

In order to issue an ITA for an activity, section 101(a)(5)(D) of the MMPA states that NMFS must, where applicable, set forth "requirements pertaining to the monitoring and reporting of such taking." The MMPA implementing regulations at 50 CFR 216.104 (a)(13) require that requests for ITAs include the suggested means of accomplishing the necessary monitoring and reporting that will result in increased knowledge of the species and

of the level of taking or impacts on populations of marine mammals that are expected to be present in the action area.

Monitoring measures prescribed by NMFS should accomplish one or more of the following general goals:

(1) An increase in the probability of detecting marine mammals, both within the mitigation zone (thus allowing for more effective implementation of the mitigation) and in general to generate more data to contribute to the analyses mentioned below;

(2) An increase in our understanding of how many marine mammals are likely to be exposed to levels from construction equipment that we associate with specific adverse effects, such as behavioral harassment, TTS or PTS;

(3) An increase in our understanding of how marine mammals respond to stimuli expected to result in take and how anticipated adverse effects on individuals (in different ways and to varying degrees) may impact the population, species, or stock (specifically through effects on annual rates of recruitment or survival) through any of the following methods:

- Behavioral observations in the presence of stimuli compared to observations in the absence of stimuli (need to be able to accurately predict received level, distance from source, and other pertinent information);
- Physiological measurements in the presence of stimuli compared to observations in the absence of stimuli (need to be able to accurately predict receive level, distance from the source, and other pertinent information);
- Distribution and/or abundance comparisons in times or areas with concentrated stimuli versus times or areas without stimuli;

(4) An increased knowledge of the affected species; and

(5) An increase in our understanding of the effectiveness of certain mitigation and monitoring measures.

#### Monitoring

The City of San Diego has developed a monitoring plan (see Appendix I, Mitigated Negative Declaration in the IHA application) based on discussions between the project biologist, Dr. Doyle Hanan, and NMFS biologists. The plan has been vetted by City of San Diego planners and reviewers. The plan has been formally presented to the public for review and comment. The City of San Diego has responded in writing and in public testimony (see City of San Diego Council Hearing, December 14, 2011) to all public concerns.

The monitoring plan involves surveying prior to construction activities, monitoring during construction activities by NMFS-approved PSOs with high-resolution binoculars and handheld digital sound level meters (measuring devices in the 30 to 130 dB re 20  $\mu$ Pa range), and post-construction monitoring. The City of San Diego would include sound measurements at and near the construction site in their initial survey prior to the activities as a background and baseline for the project. While no specific acoustic study is planned, the City of San Diego's Mitigated Negative Declaration states that marine mammal monitoring shall be conducted for three to five days prior to construction and shall include hourly systematic counts of pinnipeds using the beach, Seal Rock, and associated reef areas. Monitoring three to five days prior to construction will provide baseline data regarding recent haul-out behavior and patterns as well as background noise levels near the time of the construction activities.

During the construction activities, monitoring shall assess behavior and potential behavioral responses to construction noise and activities. PSOs would observe the construction activities from a station along the breakwater wall and from the base of the cliff below the construction area. PSOs would be on site approximately 30 minutes before the start of construction activities and would remain on site until 30 minutes after activities have ceased. Visual digital recordings and photographs shall be used to document individuals and behavioral responses to construction. The City of San Diego (*i.e.*, PSOs) plans to make hourly counts of the number of pinnipeds present and record sound or visual events that result in behavioral responses and changes, whether during construction or from public stimuli. During these events, pictures and video will also be taken when possible. The "Mitigated Negative Declaration" states "monitoring shall assess behavior and potential behavioral responses to construction noise and activities. Visual digital recordings and photographs shall be used to document individuals and behavioral responses to construction."

Monitors will have authority to stop construction as necessary depending on sound levels, pinniped presence, and distance from sound sources. Daily monitoring reports would be maintained for periodic summary reports to the City of San Diego and to NMFS. Observations would be entered into and maintained on Hanan & Associates computers. The City of San Diego plans to follow the reporting requirements in

the Mitigated Negative Declaration, which states that "the biologist shall document field activity via the Consultant Site Visit Record. The Consultant Site Visit Record shall be either emailed or faxed to the City of San Diego's Mitigation Monitoring Coordination process (MMC) on the 1st day of monitoring, the 1st week of each month, the last day of monitoring, and immediately in the case of any undocumented discovery. The project biologist shall submit a final construction monitoring report to MMC within 30 days of construction completion." The MMC "coordinates the monitoring of development projects and requires that changes are approved and implemented to be in conformance with the permit requirements and to minimize any damage to the environment." These documents will also be sent to NMFS. Finally, the City of San Diego has modified its monitoring program to include 60 days of monitoring post-construction activities. Following construction, the City of San Diego would have a program of onsite PSOs that would randomly select a day per week to monitor.

NMFS notes that the WAN's La Jolla Harbor Seal Webcam was attached to the old (now demolished) lifeguard station and is no longer available online ([http://www.wanconservancy.org/la\\_jolla\\_harbor\\_seal\\_earthcam.htm](http://www.wanconservancy.org/la_jolla_harbor_seal_earthcam.htm)). The City of San Diego has stated that there is no suitable place to mount the camera at the construction site. Therefore, the City of San Diego cannot do periodic checks using the webcam for monitoring purposes as required by the 2013 IHA. However, the camera was not expected to replace NMFS-qualified PSOs at the site making accurate counts, measuring sound levels and observing the public and the construction, as well as the harbor seals. In the old camera view, a person may have been able to see visual evidence of Level B harassment but probably would not have been able to distinguish between harassment from construction activities and harassment from the public since the camera had a limited scope and only showed the Children's Pool beach and pinnipeds (usually a specific portion of the beach, but not the reef nor nearby beaches).

Consistent with NMFS procedures, the following marine mammal monitoring and reporting shall be performed for the action:

(1) The PSO shall be approved by NMFS prior to construction activities.

(2) The NMFS-approved PSO shall attend the project site prior to, during, and after construction activities cease each day throughout the construction window.



(3) The PSO shall search for marine mammals within the Children's Pool area.

(4) The PSO shall be present during construction activities to observe for the presence of marine mammals in the vicinity of the specified activity. All such activity would occur during daylight hours (*i.e.*, 30 minutes after sunrise and 30 minutes before sunset). If inclement weather limits visibility within the area of effect, the PSO would perform visual scans to the extent conditions allow.

(5) If marine mammals are sighted by the PSO within the acoustic threshold areas, the PSO shall record the number of marine mammals within the area of effect and the duration of their presence while the noise-generating activity is occurring. The PSO would also note whether the marine mammals appeared to respond to the noise and, if so, the nature of that response. The PSO shall record the following information: date and time of initial sighting, tidal stage, weather conditions, Beaufort sea state, species, behavior (activity, group cohesiveness, direction and speed of travel, etc.), number, group composition, distance to sound source, number of animals impacted, construction activities occurring at time of sighting, and monitoring and mitigation measures implemented (or not implemented). The observations would be reported to NMFS.

(6) A final report will be submitted summarizing all in-air acoustic effects from construction activities and marine mammal monitoring during the time of the authorization, and any long term impacts from the project.

A written log of dates and times of monitoring activity will be kept. The log shall report the following information:

- Time of observer arrival on site;
- Time of the commencement of in-air noise generating activities, and description of the activities;
- Distances to all marine mammals relative to the sound source;
- Distances from the sound meter to each sound-producing activity when conducting sound measurements;
- For harbor seal observations, notes on seal behavior during noise-generating activity, as described above, and on the number and distribution of seals observed in the project vicinity;
- For observations of all marine mammals other than harbor seals, the time and duration of each animal's presence in the project vicinity; the number of animals observed; the behavior of each animal, including any response to noise-generating activities;
- Time of the cessation of in-air noise generating activities; and

- Time of observer departure from site.

All monitoring data collected during construction would be included in the biological monitoring notes to be submitted. A final report summarizing the construction monitoring and any general trends observed will also be submitted to NMFS within 90 days after monitoring has ended during the period of the lifeguard station construction.

#### Reporting

The City of San Diego will notify NMFS Headquarters and the NMFS Southwest Regional Office prior to initiation of the construction activities. A draft final report must be submitted to NMFS within 90 days after the conclusion of the construction activities of the Children's Pool Lifeguard Station. The report would include a summary of the information gathered pursuant to the monitoring requirements set forth in the IHA, including dates and times of operations and all marine mammal sightings (dates, times, locations, species, behavioral observations [activity, group cohesiveness, direction and speed of travel, etc.], tidal stage, weather conditions, Beaufort sea state and wind force, associated construction activities). A final report must be submitted to the Regional Administrator within 30 days after receiving comments from NMFS on the draft final report. If no comments are received from NMFS, the draft final report would be considered to be the final report.

While the IHA does not authorize injury (*i.e.*, Level A harassment), serious injury, or mortality, should the applicant, contractor, monitor or any other individual associated with the construction project observe an injured or dead marine mammal, the incident (regardless of cause) will be reported to NMFS as soon as practicable. The report should include species or description of animal, condition of animal, location, time first found, observed behaviors (if alive) and photo or video, if available.

In the unanticipated event that the City of San Diego discovers a live stranded marine mammal (sick and/or injured) at Children's Pool, they shall immediately contact Sea World's stranded animal hotline at 1-800-541-7235. Sea World shall also be notified if a dead stranded pinniped is found so that a necropsy can be performed. In all cases, NMFS shall be notified as well, but for immediate response purposes, Sea World shall be contacted first.

**Reporting Prohibited Take**—In the unanticipated event that the specified activity clearly causes the take of a marine mammal in a manner prohibited by this IHA, such as an injury (Level A

harassment), serious injury, or mortality, the City of San Diego shall immediately cease the specified activities and immediately report the incident to the Chief of the Permits and Conservation Division, Office of Protected Resources, NMFS, at 301-427-8401 and/or by email to [Jolie.Harrison@noaa.gov](mailto:Jolie.Harrison@noaa.gov), [Howard.Goldstein@noaa.gov](mailto:Howard.Goldstein@noaa.gov), and the West Coast Regional Stranding Coordinator (562-980-3230). The report must include the following information:

- Time, date, and location (latitude/longitude) of the incident;
- The type of activity involved;
- Description of the circumstances during and leading up to the incident;
- Status of all sound source use in the 24 hours preceding the incident; water depth; environmental conditions (*e.g.*, wind speed and direction, Beaufort sea state, cloud cover, and visibility);
- Description of marine mammal observations in the 24 hours preceding the incident; species identification or description of the animal(s) involved;
- The fate of the animal(s); and photographs or video footage of the animal (if equipment is available).

Activities shall not resume until NMFS is able to review the circumstances of the prohibited take. NMFS shall work with the City of San Diego to determine the action necessary to minimize the likelihood of further prohibited take and ensure MMPA compliance. The City of San Diego may not resume its activities until notified by NMFS via letter, email, or telephone.

**Reporting an Injured or Dead Marine Mammal With an Unknown Cause of Death**—In the event that the City of San Diego discovers an injured or dead marine mammal, and the lead PSO determines that the cause of the injury or death is unknown and the death is relatively recent (*i.e.*, in less than a moderate state of decomposition as described in the next paragraph), the City of San Diego will immediately report the incident to the Chief of the Permits and Conservation Division, Office of Protected Resources, NMFS, at 301-427-8401, and/or by email to [Jolie.Harrison@noaa.gov](mailto:Jolie.Harrison@noaa.gov), [Howard.Goldstein@noaa.gov](mailto:Howard.Goldstein@noaa.gov), and the NMFS West Coast Regional Office (1-866-767-6114), and/or to the West Coast Regional Stranding Coordinator (562-980-3230). The report must include the same information identified above. Activities may continue while NMFS reviews the circumstances of the incident. NMFS will work with the City of San Diego to determine whether modification of the activities is appropriate.

*Reporting an Injured or Dead Marine Mammal Not Related to the Activities—*

In the event that the City of San Diego discovers an injured or dead marine mammal, and the lead PSO determines that the injury or death is not associated with or related to the activities authorized (e.g., previously wounded animal, carcass with moderate to advanced decomposition, or scavenger damage), the City of San Diego shall report the incident to the Chief of the Permits and Conservation Division, Office of Protected Resources, NMFS, at 301-427-8401, and/or by email to [Jolie.Harrison@noaa.gov](mailto:Jolie.Harrison@noaa.gov), [Howard.Goldstein@noaa.gov](mailto:Howard.Goldstein@noaa.gov), and the NMFS West Coast Regional Office (1-866-767-6114) and/or to the West Coast Regional Stranding Coordinator (562-980-3230) within 24 hours of the discovery. The City of San Diego shall provide photographs or video footage (if available) or other documentation of the stranded animal sighting to NMFS and the Marine Mammal Stranding Network. Activities may continue while NMFS reviews the circumstances of the incident.

*Monitoring Results From Previously Authorized Activities*

*2013 to 2014*

Hanan & Associates, Inc., on behalf of the City of San Diego, conducted marine mammal and in-air sound monitoring at six locations during demolition and construction activities at the Children's Pool Lifeguard Station in La Jolla, California from June 3, 2013 to February 12, 2014. Demolition and construction activities began on July 10, 2013 and were halted for the Pacific harbor seal pupping season (December 15, 2013 to June 1, 2014). During 115 days of visual and acoustic observations, Hanan & Associates counted a total of 61,631 Pacific harbor seals and 26,037 people. During the 2013 demolition and construction activities, Hanan & Associates observed a total of 15,673 takes by Level B harassment (i.e., alerts, movements, and flushes) that could be

attributed to demolition and construction activities (5,095 takes), the general public (8,639 takes), and other sources (1,939 takes). As of April 15, 2014, at least 60 harbor seal pups (including 2 still births) have been born at the Children's Pool and there has been no indication of abandonment. In addition to the Pacific harbor seal sightings, PSOs recorded 11 sightings of cetaceans (gray whales and bottlenose dolphins), 4 sightings of California sea lions (1 juvenile, 3 adult), and 2 northern elephant seals (both juveniles) at the Children's Pool.

Hanan & Associates recorded mean in-air sound levels of 69.2 dB re 20  $\mu$ Pa (range of 55.6 to 93.7 dB re 20  $\mu$ Pa) during non-demolition and construction activities and 70.3 dB re 20  $\mu$ Pa (range of 50.7 to 103.1 dB re 20  $\mu$ Pa) during demolition and construction activities. During 2013, measured sound levels from the demolition equipment reaching the pinnipeds did not exceed approximately 90 dB re 20  $\mu$ Pa at the haul-out area closest to the demolition and construction activities, nor did they exceed a peak of about 83 dB re 20  $\mu$ Pa at the mean hauling-out distance (30.5 m).

*2014 to 2015*


Hanan & Associates, Inc., on behalf of the City of San Diego, conducted marine mammal and in-air sound monitoring at seven locations during demolition and construction activities at the Children's Pool Lifeguard Station in La Jolla, California from August 6, 2014 to March 15, 2015. Construction activities began on August 6, 2014 and were halted for the Pacific harbor seal pupping season (December 15, 2014 to June 1, 2015). During 127 days of visual and acoustic observations, Hanan & Associates counted a total of 63,598 Pacific harbor seals and 27,844 people. During the 2014 demolition and construction activities, Hanan & Associates observed a total of 20,259 takes by Level B harassment (i.e., alerts, movements, and flushes) that could be attributed to

demolition and construction activities (7,424 takes), the general public (10,000 takes), and other sources (2,835 takes). As of March 13, 2015, at least 60 harbor seal pups (including 6 still or premature births) have been born at the Children's Pool and there has been no indication of abandonment. In addition to the Pacific harbor seal sightings, PSOs recorded 24 sightings of cetaceans (gray whales, common and bottlenose dolphins), 366 sightings of California sea lions (at Seal Rock, Children's Pool beach, South Casa Beach, and on the reef), and 1 northern elephant seals (1 juvenile on Children's Pool beach) at the Children's Pool. One dead adult and one dead juvenile California sea lion were sighted on the Children's Pool beach after the start of the beach closure and after the construction activities stopped for the pupping season. These strandings were reported to NMFS.

Hanan & Associates recorded mean in-air sound levels of 68.9 dB re 20  $\mu$ Pa (range of 51.5 to 97.2 dB re 20  $\mu$ Pa) during non-construction activities and 71.3 dB re 20  $\mu$ Pa (range of 49.4 to 102.7 dB re 20  $\mu$ Pa) during construction activities. During 2014, measured sound levels from the construction equipment reaching the pinnipeds did not exceed approximately 90 dB re 20  $\mu$ Pa at the haul-out area closest to the construction activities.

More information on the monitoring results from the City of San Diego's previous demolition and construction activities at the La Jolla Children's Pool Lifeguard Station can be found in the final monitoring reports. The 2013 to 2014 and 2014 to 2015 monitoring reports can be found online at: <http://www.nmfs.noaa.gov/pr/permits/incidental/construction.htm#childrenspool>.

Figure 2. Daily peak counts and long-term trends with a 95% confidence interval of Pacific harbor seals at Children's Pool from June 2014 to February 2015 based on monitoring at the site by Hanan & Associates.

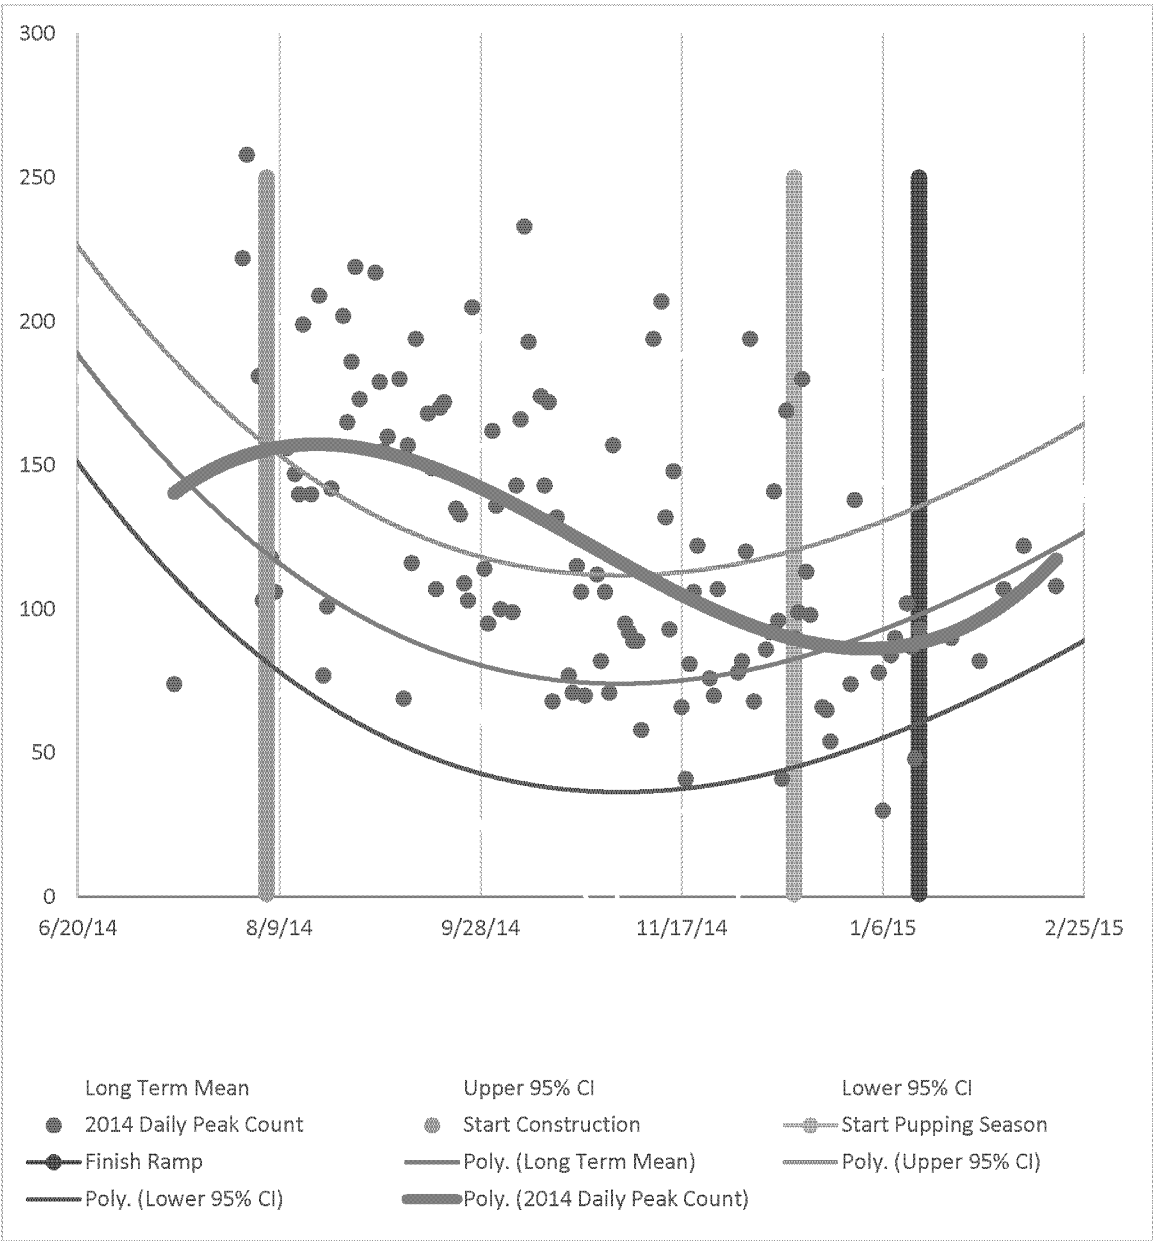

**Estimated Take by Incidental Harassment**

Except with respect to certain activities not pertinent here, the MMPA defines “harassment” as: any act of

pursuit, torment, or annoyance which (i) has the potential to injure a marine mammal or marine mammal stock in the wild [Level A harassment]; or (ii) has the potential to disturb a marine mammal or marine mammal stock in the

wild by causing disruption of behavioral patterns, including, but not limited to, migration, breathing, nursing, breeding, feeding, or sheltering [Level B harassment].

TABLE 2—NMFS’S CURRENT UNDERWATER AND IN-AIR ACOUSTIC EXPOSURE CRITERIA

Criterion	Criterion definition	Threshold
Underwater Impulsive (Non-Explosive) Sound		
Level A harassment (injury) .....	Permanent threshold shift (PTS) (Any level above that which is known to cause TTS).	180 dB re 1 $\mu$ Pa-m (root means square [rms]) (cetaceans)
Level B harassment .....	Behavioral disruption (for impulsive noise) .....	190 dB re 1 $\mu$ Pa-m (rms) (pinnipeds).
Level B harassment .....	Behavioral disruption (for continuous noise) ....	160 dB re 1 $\mu$ Pa-m (rms).
In-Air Sound		
Level A harassment .....	NA .....	NA

TABLE 2—NMFS'S CURRENT UNDERWATER AND IN-AIR ACOUSTIC EXPOSURE CRITERIA—Continued

Criterion	Criterion definition	Threshold
Level B harassment .....	Behavioral disruption .....	90 dB re 20 $\mu$ Pa (harbor seals) 100 dB re 20 $\mu$ Pa (all other pinniped species) NA (cetaceans).

NA = Not available or not assessed.


The City of San Diego and NMFS anticipate takes of Pacific harbor seals, California sea lions, and northern elephant seals by Level B (behavioral) harassment only incidental to the construction project at the Children's Pool. No takes by injury (Level A harassment), serious injury, or mortality are expected. NMFS will consider pinnipeds behaviorally reacting to the construction activities by flushing into the water, moving more than 1 m (3.3 ft), but not into the water; becoming alert and moving, but not moving more than 1 m; and changing direction of current movements by individuals as

behavioral criteria for take by Level B harassment.

With planned construction activities scheduled to begin in June 2015, the City of San Diego expects a range of 0 to 190 harbor seals to be present daily during June and a seasonal decline through November to about 0 to 50 harbor seals present daily. If all of the estimated harbor seals present are taken by incidental harassment each day, there could be a maximum of 10,000 takes (*i.e.*, approximately 2,947 adult males and 2,211 juvenile males, 2,842 adult females and 2,000 juvenile females based on age and sex ratios presented in Harkonen *et al.*, 1999) over

the entire duration of the activities. An unknown portion of the incidental takes will be from repeated exposures as harbor seals leave and return to the Children's Pool area. A polynomial curve fit to counts by month was used by the City of San Diego to estimate the number of harbor seals expected to be hauled-out by day (see below and Figure 2 of the IHA application).

Figure 3. Estimated total harbor seals by month based on counts at the site by Hanan & Associates, Yochem and Stewart, and Children's Pool docents. The polynomial curve fits to counts by months was used to estimate harbor seals expected to be hauled-out by day.

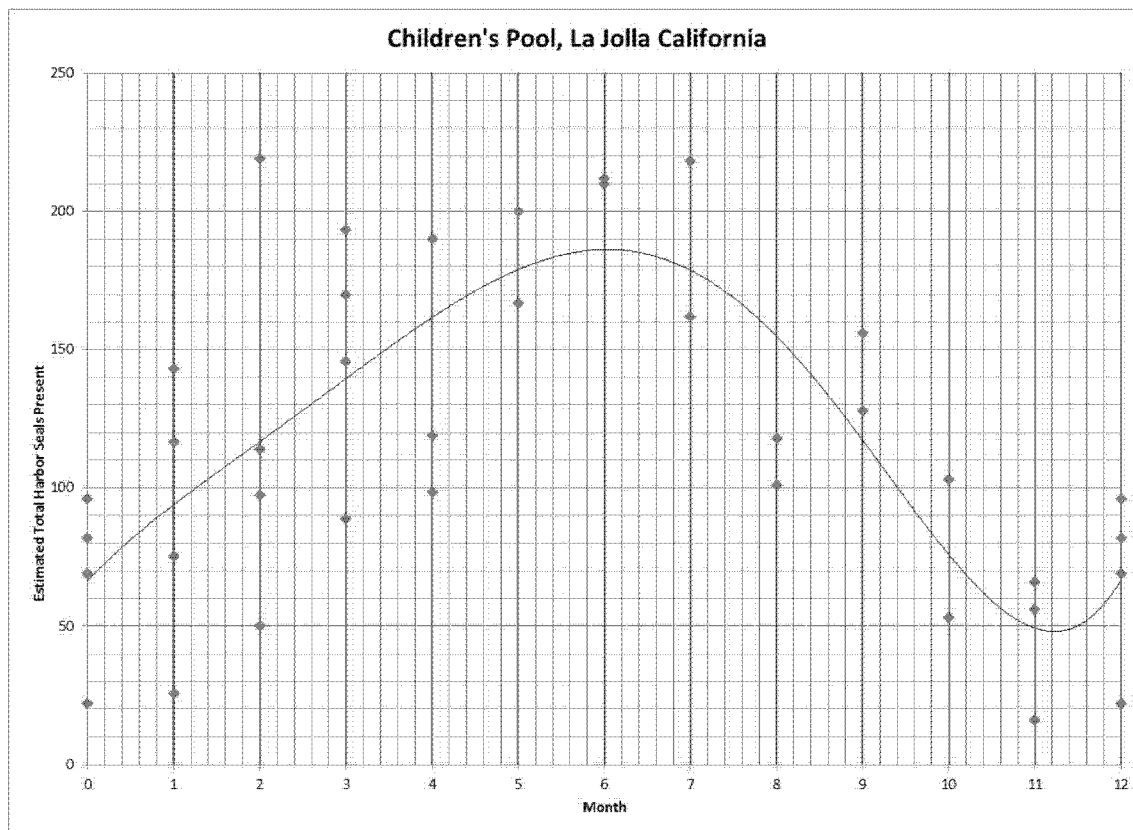

Assuming the total seals predicted to haul-out daily at the Children's Pool are exposed to sound levels that are considered Level B harassment during days where sound is predicted to exceed 90 dB at the construction site (65 days),

there could be a maximum of approximately 10,000 incidental takes (*i.e.*, exposures) of approximately up to 600 individual Pacific harbor seals over the duration of the activities. The estimated 600 individual Pacific harbor

seals will be taken by Level B harassment multiple times during the construction activities.

Very few California sea lions and/or northern elephant seals are ever observed at the Children's Pool (*i.e.*, one

or two individuals). The City of San Diego requests the authority to incidentally take (*i.e.*, exposures) 10,000 Pacific harbor seals, 100 California sea

lions, and 25 northern elephant seals, which will equate to 600, 2, and 1 individuals, respectively, being exposed multiple times. More information on the

number of takes authorized, and the approximate percentage of the stock for the three species in the action area can be found in Table 3.

**TABLE 3—SUMMARY OF THE AUTHORIZED INCIDENTAL TAKE BY LEVEL B HARASSMENT OF PINNIPEDS FOR THE CITY OF SAN DIEGO'S CONSTRUCTION ACTIVITIES GENERATING IN-AIR NOISE AT THE CHILDREN'S POOL LIFEGUARD STATION IN LA JOLLA, CA**

Species	Take authorization (number of exposures)	Estimated number of individuals taken	Abundance	Approximate percentage of estimated stock (individuals)	Population trend
Pacific harbor seal .....	10,000	600	30,968—California stock .....	1.93	Increased in California 1981 to 2004
California sea lion .....	100	2	296,750—U.S. stock .....	<0.01	Increasing
Northern elephant seal .....	25	1	179,000—California breeding stock.	<0.01	Increasing 3.8% annually since 1988

### Encouraging and Coordinating Research

Each construction phase and potential harassment activity will be evaluated as to observed sound levels and any pinniped reaction by type of sound source. Flushing would be documented by sex and age class. These data will provide information for IHA permitting in future projects. Potential additional mitigation (other than what is already required) will be discussed and suggested in the final report. NMFS has encouraged the City of San Diego to review and analyze any available data to determine baseline information as well as evaluate the impacts from the construction activities on the pinnipeds at the Children's Pool.

### Impact on Availability of Affected Species or Stock for Taking for Subsistence Uses

Section 101(a)(5)(D) of the MMPA requires NMFS to determine that the authorization will not have an unmitigable adverse effect on the availability of marine mammal species or stocks for subsistence use. There are not relevant subsistence uses of marine mammals implicated by this action. Therefore, NMFS has determined that the total taking of affected species or stocks will not have an unmitigable adverse impact on the availability of such species or stocks for subsistence purposes.

### Analysis and Determinations

#### Negligible Impact

Negligible impact is “an impact resulting from the specified activity that cannot be reasonably expected to, and is not reasonably likely to, adversely affect the species or stock through effects on annual rates of recruitment or survival” (50 CFR 216.103). A negligible impact

finding is based on the lack of likely adverse effects on annual rates of recruitment or survival (*i.e.*, population-level effects). An estimate of the number of Level B harassment takes, alone, is not enough information on which to base an impact determination. In addition to considering estimates of the number of marine mammals that might be “taken” through behavioral harassment, NMFS must consider other factors, such as the likely nature of any responses (their intensity, duration, etc.), the context of any responses (critical reproductive time or location, migration, etc.), as well as the number and nature of estimated Level A harassment takes, the number of estimated mortalities, effects on habitat, and the status of the species.

In making a negligible impact determination, NMFS evaluated factors such as:

- (1) The number of anticipated serious injuries or mortalities;
- (2) The number and nature of anticipated injuries;
- (3) The number, nature, intensity, and duration of Level B harassment; and
- (4) The context in which the takes occur (*i.e.*, impacts to areas of significance, impacts to local populations, and cumulative impacts when taking into account successive/contemporaneous actions when added to baseline data);
- (5) The status of the stock or species of marine mammals (*e.g.*, depleted, ESA-listed, decreasing, increasing, stable, impact relative to the size of the population);
- (6) Impacts on habitat affecting rates of recruitment/survival; and
- (7) The effectiveness of monitoring and mitigation measures.

To avoid repetition, the discussion of NMFS's analyses applies to all the species or stocks for which take is being

authorized (listed in Table 3), given that the anticipated effects of these construction activities on marine mammals are expected to be relatively similar in nature in this case. Additionally, there is no information about the nature or severity of the impacts, or the size, status, or structure of any species or stock that would lead to a different analysis for this activity, else species-specific factors would be identified and analyzed. NMFS had determined that the specified activities associated with the construction activities are not likely to cause long-term behavioral disturbance, PTS, or other (non-auditory) injury, serious injury, or death, based on the analysis contained in the notice of the proposed IHA (80 FR 28588, May 19, 2015). NMFS also considered the following factors:

No injuries (Level A harassment), serious injuries, or mortalities are anticipated to occur as a result of the City of San Diego's construction activities, and none are authorized by NMFS. The planned activities are not expected to result in the alteration of reproductive behaviors, and the potentially affected species would be subjected to only temporary and minor behavioral impacts.

Behavioral disturbance may potentially occur incidental to the visual presence of humans and construction activities; however, pinnipeds at this site have likely adapted or become acclimated to human presence at this site. These “urbanized” harbor seals do not exhibit sensitivity at a level similar to that noted in harbor seals in some other regions affected by human disturbance (Allen *et al.*, 1984; Suryan and Harvey, 1999; Henry and Hammil, 2001; Johnson and Acevedo-Gutierrez, 2007; Jansen *et al.*, 2006; Hanan & Associates, 2011). Therefore,

there is a high likelihood that many of the harbor seals present during the construction activities would not be flushed off of the beach or rocks, as pinnipeds at this site are conditioned to human presence and loud noises (Hanan, 2004; Hanan & Associates, 2011) (see <http://www.youtube.com/watch?v=4IRUYVTULsg>).

As discussed in detail above, the project scheduling avoids sensitive life stages for Pacific harbor seals. Construction activities producing in-air noise will commence in June and end by December 15. The commencement date occurs after the end of the pupping season, affords additional time to accommodate lactation and weaning of season pups, and takes into account periods of lowest haul-out occurrence. The end date falls approximately two weeks prior to January 1, the time after which most births occur, providing protection for pregnant and nursing harbor seals that may give birth before January 1.

Table 3 of this document outlines the number of Level B harassment takes that are anticipated as a result of these activities. Due to the nature, degree, and context of Level B (behavioral) harassment anticipated and described (see “Potential Effects on Marine Mammals” section above) in this notice, this activity is not expected to impact rates of annual recruitment or survival for the affected species or stock (*i.e.*, California stock of Pacific harbor seals, U.S. stock of California sea lions, and California breeding stock of northern elephant seals), particularly given the required mitigation, monitoring, and reporting measures that would be implemented to minimize impacts to marine mammals.

The Children’s Pool is one of the three known haul-out sites for Pacific harbor seal in San Diego County and the only rookery in San Diego County and the only mainland rookery on the U.S. west coast for this species between the border of Mexico and Point Mugu in Ventura County, CA. For the other marine mammal species that may occur within the action area (*i.e.*, California sea lions and northern elephant seals), there are no known designated or important feeding and/or reproductive areas. Many animals perform vital functions, such as feeding, resting, traveling, and socializing, on a diel cycle (*i.e.*, 24 hour cycle). Behavioral reactions to noise exposure (such as disruption of critical life functions, displacement, or avoidance of important habitat) are more likely to be significant if they last more than one diel cycle or recur on subsequent days (Southall *et al.*, 2007). However, Pacific harbor seals have been

hauling-out at Children’s Pool during the year for many years (including during pupping season and while females are pregnant) while being exposed to anthropogenic sound sources such as vehicle traffic, human voices, etc. and other stimuli from human presence. While studies have shown the types of sound sources used during the construction activities have the potential to displace marine mammals from breeding areas for a prolonged period (*e.g.*, Lusseau and Bejder, 2007; Weilgart, 2007), based on the best available information, this does not seem to be the case for the Pacific harbor seals at the Children’s Pool. The Pacific harbor seals have repeatedly hauled-out to pup over many years and the NMFS Stock Assessment Reports (NMFS, 2011) for this stock have shown that the population is increasing and is considered stable. Additionally, the construction activities would increase sound levels in the environment in a relatively small area surrounding the lifeguard station (compared to the range of the animals), and some animals may only be exposed to and harassed by sound for less than a day.

NMFS’s practice has been to apply the 90 dB re 20  $\mu$ Pa and 100 dB re 20  $\mu$ Pa received level threshold for in-air sound levels to determine whether take by Level B harassment occurs. Southall *et al.* (2007) provide a severity scale for ranking observed behavioral responses of both free-ranging marine mammals and laboratory subjects to various types of anthropogenic sound (see Table 4 in Southall *et al.* [2007]). NMFS has not established a threshold for Level A harassment (injury) for marine mammals exposed to in-air noise, however, Southall *et al.* (2007) recommends 149 dB re 20  $\mu$ Pa (peak flat) as the potential threshold for injury from in-air noise for all pinnipeds. No in-air sounds from construction activities would exceed 110 dB at the source and no measured sounds approached that sound level in 2013.

Of the 3 marine mammal species under NMFS jurisdiction that may or are known to likely occur in the action area, none are listed as threatened or endangered under the ESA. No incidental take has been requested to be authorized for ESA-listed species as none are expected to be within the action area. To protect these animals (and other marine mammals in the action area), the City of San Diego shall schedule construction activities with highest sound levels during the daily period of lowest haul-out occurrence; limit activities to the hours of daylight; erect a temporary visual and acoustic barrier; use PSOs and prohibit

construction activities during harbor seal pupping season. No injury, serious injury, or mortality is expected to occur and due to the nature, degree, and context of the Level B harassment anticipated, the activity is not expected to impact rates of recruitment or survival.

Although behavioral modifications, including temporarily vacating the area during the construction activities, may be made by these species to avoid the resultant acoustic disturbance, the availability of alternate areas within these areas for species and the short and sporadic duration of the activities, have led NMFS to determine that the taking by Level B harassment from the specified activity would have a negligible impact on the affected species in the specified geographic region. NMFS believes that the time period of the construction activities, the requirement to implement mitigation measures (*e.g.*, prohibiting construction activities during pupping season, scheduling operations to periods of the lowest haul-out occurrence, visual and acoustic barriers, and the addition of a new measure that helps protect against unexpected abandonment of the site), and the inclusion of the monitoring and reporting measures, will reduce the amount and severity of the potential impacts from the activity to the degree that will have a negligible impact on the species or stocks in the action area.

Based on the analysis contained herein of the likely effects of the specified activity on marine mammals and their habitat, and taking into consideration the implementation of the monitoring and mitigation measures, NMFS finds that the total marine mammal take from the City of San Diego’s activities will have a negligible impact on the affected marine mammal species or stocks.

#### Small Numbers

As mentioned previously, NMFS estimates that 3 species of marine mammals under its jurisdiction could be potentially affected by Level B harassment over the course of the IHA. NMFS makes its small numbers determination based on the numbers or proportion of marine mammals that will be taken relative to the populations of the affected species or stocks. It is estimated that up to 600 individual Pacific harbor seals, 2 individual California sea lions, and 1 northern elephant seal would be taken (multiple times) by Level B harassment, which would be approximately 1.93, less than 0.01, and less than 0.01% of the respective California, U.S., and California breeding stocks. The

population estimates for the marine mammal species that may be taken by Level B harassment were provided in Table 2 of this document.

NMFS has determined, provided that the aforementioned mitigation and monitoring measures are implemented, that the impact of the construction activities at the Children's Pool Lifeguard Station in La Jolla, CA, June 2015 to June 2016, may result, at worst, in a temporary modification in behavior and/or low-level physiological effects (Level B harassment) of small numbers of certain species of marine mammals. Based on the analysis contained herein of the likely effects of the specified activity on marine mammals and their habitat, and taking into consideration the implementation of the mitigation and monitoring measures, NMFS finds that small numbers of marine mammals will be taken relative to the populations of the affected species or stocks. See Table 2 for the authorized take numbers of marine mammals.

#### Endangered Species Act

NMFS (Permits and Conservation Division) has determined that an ESA section 7 consultation for the issuance of an IHA under section 101(a)(5)(D) of the MMPA for this activity is not necessary for any ESA-listed marine mammal species under its jurisdiction, as the planned action will not affect ESA-listed species.

#### National Environmental Policy Act

To meet NMFS's National Environmental Policy Act (NEPA; 42 U.S.C. 4321 *et seq.*) requirements for the issuance of an IHA to the City of San Diego, NMFS prepared an Environmental Assessment (EA) in 2013 for a similar activity titled *Environmental Assessment on the Issuance of an Incidental Harassment Authorization to the City of San Diego to Take Marine Mammals by Harassment Incidental to Demolition and Construction Activities at the Children's Pool Lifeguard Station in La Jolla, California* to comply with the Council of Environmental Quality (CEQ) regulations and NOAA Administrative Order (NAO) 216-6. NMFS prepared and signed a Finding of No Significant Impact (FONSI) determining that preparation of an Environmental Impact Statement was not required. The FONSI was signed on June 28, 2013 prior to the issuance of the IHA for the City of San Diego's construction activities from June 2013 to June 2014. The currently planned construction activities that will be covered by the IHA from June 2015 to June 2016 are similar to the demolition and construction activities

described in the 2013 EA. NMFS has reviewed CEQ's regulations and has determined that it is not necessary to supplement the 2013 EA because the effects of this IHA fall within the scope of those documents and do not require further supplementation. Based on the public comments received in response to the publication in the **Federal Register** notice and proposed IHA, NMFS has reaffirmed its FONSI.

#### Authorization

NMFS has issued an IHA to the City of San Diego for construction activities at the Children's Pool Lifeguard Station at La Jolla, CA, incorporating the previously mentioned mitigation, monitoring, and reporting requirements.

Dated: June 30, 2015.

**Perry F. Gayaldo,**

*Deputy Director, Office of Protected Resources, National Marine Fisheries Service.*

[FR Doc. 2015-16965 Filed 7-10-15; 8:45 am]

**BILLING CODE 3510-22-P**

#### DEPARTMENT OF COMMERCE

##### National Oceanic and Atmospheric Administration

**RIN 0648-XD782**

##### **Takes of Marine Mammals Incidental to Specified Activities; Taking Marine Mammals Incidental to Marine Seismic Survey in the Beaufort Sea, Alaska**

**AGENCY:** National Marine Fisheries Service (NMFS), National Oceanic and Atmospheric Administration (NOAA), Commerce.

**ACTION:** Notice; issuance of an incidental take authorization.

**SUMMARY:** In accordance with the Marine Mammal Protection Act (MMPA) regulations, notification is hereby given that NMFS has issued an Incidental Harassment Authorization (IHA) to SAExploration, Inc. (SAE) to take, by harassment, small numbers of marine mammals incidental to a marine 3-dimensional (3D) ocean bottom node (OBN) seismic survey program in the Beaufort Sea, Alaska, during the 2015 Arctic open-water season.

**DATES:** Effective July 1, 2015, through October 15, 2015.

**ADDRESSES:** Inquiry for information on the incidental take authorization should be addressed to Jolie Harrison, Chief, Permits and Conservation Division, Office of Protected Resources, National Marine Fisheries Service, 1315 East West Highway, Silver Spring, MD 20910. A copy of the application containing a list of the references used

in this document, NMFS' Environmental Assessment (EA) and Finding of No Significant Impact (FONSI), and the IHA may be obtained by writing to the address specified above, telephoning the contact listed below (see **FOR FURTHER INFORMATION CONTACT**), or visiting the Internet at: <http://www.nmfs.noaa.gov/pr/permits/incidental.htm#applications>.

Documents cited in this notice may be viewed, by appointment, during regular business hours, at the aforementioned address.

**FOR FURTHER INFORMATION CONTACT:** Shane Guan, Office of Protected Resources, NMFS, (301) 427-8401.

#### **SUPPLEMENTARY INFORMATION:**

##### **Background**

Sections 101(a)(5)(A) and (D) of the MMPA (16 U.S.C. 1361 *et seq.*) direct the Secretary of Commerce to allow, upon request, the incidental, but not intentional, taking of small numbers of marine mammals by U.S. citizens who engage in a specified activity (other than commercial fishing) within a specified geographical region if certain findings are made and either regulations are issued or, if the taking is limited to harassment, a notice of a proposed authorization is provided to the public for review.

An authorization for incidental takings shall be granted if NMFS finds that the taking will have a negligible impact on the species or stock(s), will not have an unmitigable adverse impact on the availability of the species or stock(s) for subsistence uses (where relevant), and if the permissible methods of taking and requirements pertaining to the mitigation, monitoring and reporting of such takings are set forth. NMFS has defined "negligible impact" in 50 CFR 216.103 as "an impact resulting from the specified activity that cannot be reasonably expected to, and is not reasonably likely to, adversely affect the species or stock through effects on annual rates of recruitment or survival."

Except with respect to certain activities not pertinent here, the MMPA defines "harassment" as: Any act of pursuit, torment, or annoyance which (i) has the potential to injure a marine mammal or marine mammal stock in the wild [Level A harassment]; or (ii) has the potential to disturb a marine mammal or marine mammal stock in the wild by causing disruption of behavioral patterns, including, but not limited to, migration, breathing, nursing, breeding, feeding, or sheltering [Level B harassment].

### Summary of Request

On December 2, 2014, NMFS received an application from SAE for the taking of marine mammals incidental to a 3D ocean bottom node (OBN) seismic survey program in the Beaufort Sea. After receiving NMFS comments, SAE made revisions and updated its IHA application on December 5, 2014, January 21, 2015, January 29, 2015, and again on February 16, 2015. In addition, NMFS received the marine mammal mitigation and monitoring plan (4MP) from SAE on December 2, 2014, with an updated version on January 29, 2015. NMFS determined that the application and the 4MP were adequate and complete on February 17, 2015.

SAE proposes to conduct 3D OBN seismic surveys in the state and federal waters of the U.S. Beaufort Sea during the 2015 Arctic open-water season. The proposed activity would occur between July 1 and October 15, 2015. The actual seismic survey is expected to take approximately 70 days, dependent on weather. The following specific aspects of the proposed activities are likely to result in the take of marine mammals: Seismic airgun operations and associated navigation sonar and vessel movements. Takes, by Level A and/or Level B Harassments, of individuals of six species of marine mammals are anticipated to result from the specified activity.

SAE also conducted OBN seismic surveys in the Beaufort Sea in the 2014 Arctic open-water season (79 FR 51963; September 2, 2014).

Detailed descriptions of SAE's 3D OBN seismic survey program are provided in the **Federal Register** notice for the proposed IHA (80 FR 20084; April 14, 2015). No change has been made in the action described in the **Federal Register** notice. Please refer to that document for detailed information about the activities involved in the seismic survey program.

### Comments and Responses

A notice of NMFS' proposal to issue an IHA to SAE was published in the **Federal Register** on April 14, 2015 (80 FR 20084). That notice described in detail SAE's activity, the marine mammal species that may be affected by the activity, and the anticipated effects on marine mammals and the availability of marine mammals for subsistence uses. During the 30-day public comment period, NMFS received only one comment letter from the Marine Mammal Commission (Commission). All comments are addressed in this section of the **Federal Register** notice.

*Comment 1:* The Commission points out that information regarding the

specific areas that would be surveyed by SAE, or specific times of year for the survey, was not available as part of the proposed incidental harassment authorization. The Commission recommends that, prior to issuing the IHA, NMFS require SAE to determine what areas it will survey and when, in order to ensure that the proposed survey area and associated numbers of takes are consistent with what NMFS plans to authorize and, if they are not, amend the numbers of takes accordingly.

*Response:* Although a specific survey area for SAE's proposed 3D OBN seismic survey has not been determined, and probably will be remain confidential until the beginning of the survey, the potential area is known and all scenarios of the proposed survey have been considered and evaluated for impact assessment. As described in the **Federal Register** notice (80 FR 20084; April 14, 2015) for the proposed IHA, the worst-case scenario related to location (with the highest animal density) is taken into consideration for the analysis of the marine mammal impacts.

*Comment 2:* The Commission points out that the total survey area for the project, 777 km<sup>2</sup>, appears low since it equates to roughly four times the size of each recording patch (192 km<sup>2</sup>). The Commission further notes that SAE has indicated that each patch would take about four days to shoot, which means that if the proposed total survey area of 777 km<sup>2</sup> is indeed accurate, SAE would be able to shoot that area within 16 days instead of 49 days.

*Response:* The Commission has confused shot patch size (192 km<sup>2</sup>) and recording patch size (19.4 km<sup>2</sup>). The shot patches greatly overlap with one another, while the recorder patches do not. Considering the tremendous overlap in shot area between adjacent patches, no more than 777 km<sup>2</sup> will be shot under this authorization, although many areas will be shot more than once. It actually would take much longer than 49 days if SAE wanted to completely survey the entire 777 km<sup>2</sup>.

*Comment 3:* The Commission states that it is concerned that the method used by SAE and NMFS to estimate numbers of takes is based on the total ensonified area rather than the area expected to be ensonified on a daily basis, as is standard for a moving sound source. The Commission recommends that NMFS use the method of area times density times the number of survey days to estimate the total number of Level A and B harassment takes for each of the marine mammal species expected to be in the project area.

*Response:* Despite that in most cases monitoring reports from 3D seismic surveys showed that take numbers, based on observation with adjustment to count for animals missed, are usually under or closely reflect the take estimates using a simple method of multiplying the total ensonified area by animal density, NMFS recognizes that such method has its limitation of not considering animal movement into the area on different days. The Commission's recommended method of area times density times the number of survey days provides an appropriate estimated of the *instances* of take, but often overestimates the number of individuals taken, because in many circumstances individual animals would be repeatedly taken. Except in rare cases when animals are migrating through the ensonified area, the "instances" of take generated by this method are higher than the individuals taken, given that in many cases marine mammals are using local habitat for multiple days and will be taken multiple times—and therefore, additional work may be needed to identify the likely numbers individuals taken to compare to the population size. NMFS is exploring new methodologies to calculate take estimates by accounting for daily ensonified area, days of the project, as well as the averaged rates of animal moving in/out of the survey area, prior monitoring report data, and other applicable information, if available. In the case of SAE's 3D OBN seismic survey, NMFS recalculated take numbers using daily ensonified area multiplied by project days multiplied by animal density and then adjusted the turnover rates based on species movement patterns and home ranges. A detailed description of the take estimates and the methodology are provided in section "Estimated Take by Incidental Harassment" below.

*Comment 4:* The Commission notes that NMFS is proposing to authorize the incidental taking of marine mammals by Level A harassment under section 101(a)(5)(D) of the MMPA, instead of through regulations under section 101(a)(5)(A) of the MMPA. The Commission states that authorizing Level A harassment under section 101(a)(5)(D) of the MMPA would be inconsistent with the intent of the MMPA. The Commission recommends that NMFS (1) develop criteria for determining when taking by Level A harassment should be authorized (*i.e.*, types of sound sources, project locations, species, effectiveness of mitigation measures) and (2) authorize any such takes through regulation under



101(a)(5)(A) of the MMPA and a letter of authorization rather than through an incidental harassment authorization. The Commission further states that it would welcome an opportunity to discuss the development of such criteria with NMFS.

*Response:* NMFS does not agree with the Commission's statement that Level A harassment cannot be authorized under section 101(a)(5)(D) of the MMPA. The legal requirements and underlying analysis for the issuance of a take authorization (*i.e.*, an IHA) in this particular case do not require the issuance of regulations and a letter of authorization. In order to issue an authorization pursuant to section 101(a)(5)(D) of the MMPA, NMFS must determine that the taking by harassment (Level A and Level B) of small numbers of marine mammal species or stocks will have a negligible impact on affected species or stocks, and will not have an unmitigable adverse impact on the availability of affected species or stocks for taking for subsistence uses. Potential impact on marine mammals incidental to SAE's 3D seismic survey would be limited to harassments only. Therefore, the issuance of an IHA to SAE under section 101(a)(5)(D) of the MMPA meets the legal requirements stated above. However, if there were a potential for serious injury or mortality, NMFS could not issue an IHA. Instead, any incidental take authorization would need to be processed under section 101(a)(5)(A) of the MMPA.

As described here and in the **Federal Register** notice (80 FR 20084; April 14, 2015) for the proposed IHA, permanent hearing threshold shift (PTS) is considered to be injury (Level A Harassment), not serious injury or mortality. Therefore, it is appropriate to issue an incidental take authorization under 101(a)(5)(D), as we have made the necessary findings (described elsewhere in this document) under that section of the MMPA.

NMFS agrees with the Commission that criteria for determining when taking by Level A harassment should be authorized (*i.e.*, types of sound sources, project locations, species, effectiveness of mitigation measures) will enhance the analysis of marine mammal incidental takes under MMPA, and appreciates the Commission's willingness to be involved in such a process.

*Comment 5:* The Commission notes that NMFS has proposed that SAE conduct in-situ sound source measurements for the 1,240-in<sup>3</sup> airgun array to ensure accurate characterization of the Level A and B harassment zones for that sound source. The Commission

recommends that NMFS verify that any adjustments to the size of the Level A and/or B harassment zones, based on in-situ measurements, are accurate before such adjustments are made.

*Response:* SAE is required to conduct in-situ sound source measurements for the 1,240-in<sup>3</sup> airgun array before the commencement of its 3D seismic surveys. The Commission did not specify a method for how the in-situ measurements should be verified. Nevertheless, NMFS will evaluate the empirically measured exclusion zone and zone of influence based on comparable measurements of similar airguns in similar environment before agreeing that SAE should adopt the measured zones for monitoring and mitigation measures.

*Comment 6:* The Commission recommends that NMFS require that SAE refrain from initiating or cease seismic activities if an aggregation of bowhead or gray whales (*i.e.*, 12 or more whales of any age/sex class that appear to be engaged in a non-migratory, significant biological behavior (*e.g.*, feeding, socializing)) is observed within the Level B harassment Zone.

*Response:* NMFS discussed the Commission's recommendation with SAE and SAE agrees to refrain from initiating or to cease seismic activities if an aggregation of bowhead or gray whales (*i.e.*, 12 or more whales of any age/sex class that appear to be engaged in a non-migratory, significant biological behavior (*e.g.*, feeding, socializing)) is observed within the Level B harassment Zone.

*Comment 7:* The Commission recommends that NMFS encourage SAE to coordinate with other operators and researchers who may be conducting aerial surveys with the goal that information collected during those surveys will assist SAE in monitoring pinnipeds use of haul-out sites before, during, and after SAE's planned seismic survey.

*Response:* NMFS discussed the Commission's recommendation with SAE and encouraged SAE to coordinate with other operations and researchers who may be conducting aerial surveys. SAE responded that they attempted to coordinate with other companies last year for spotted seal monitoring, but none agreed to cooperate. In addition, at this point it is unclear whether any other companies in the Beaufort Sea may be conducting pinnipeds haul-out aerial surveys in the 2015 open-water season. Nevertheless, NMFS encourages SAE again to seek cooperation with other companies who may be conducting aerial surveys with the goal that information collected during those

surveys will assist SAE in monitoring pinnipeds use of haul-out sites before, during, and after SAE's planned seismic survey.

*Comment 8:* The Commission recommends that NMFS incorporate the peer-review panel's recommendations into the final authorization and, if necessary, consult with personnel directly associated with implementing passive acoustic monitoring to ensure that the monitoring objectives are able to be met.

*Response:* NMFS conducted a peer review process to evaluate SAE's monitoring plan in early March 2015 in Anchorage, AK. The peer review panel submitted its report to NMFS in early April and provided recommendations to SAE. NMFS worked with SAE extensively on these recommendations. As a result, NMFS requires and SAE agrees to implement the following recommendations from the peer-review panel: (1) Conducting sound source verification (SSV) if SAE plans to use the 1,240 in<sup>3</sup> airgun array for seismic survey; (2) including an additional mitigation vessel for marine mammal monitoring if SAE plans to use the 1,240 in<sup>3</sup> airgun array; (3) deploying more acoustic sensors than the 2014 season for passive acoustic monitoring; (4) testing a new mooring design with NMFS National Marine Mammal Laboratory for micro Marine Autonomous Recording System (microMARS) to be deployed in shallow water; (5) including sightability curves in the 90-day report; and (6) making monitoring data available for valid scientific reasons and request.

In addition, though not solicited as part of the independent peer review of the monitoring, the peer-review panel also provided a number of mitigation measures which, upon discussion with SAE, the company agreed to limit the mitigation airgun shot interval to 1 shot per minute. However, SAE could not agree to the ramp up of 1 airgun per 5 minutes, as opposed to standard protocol of doubling the number of airguns every five minutes. SAE states that the recommended ramp up protocol is cost prohibitive.

A detailed description of peer-review process, peer-review recommendations, and NMFS' discussion with SAE regarding implementation of the recommendations is provided in "Monitoring Plan Peer Review" section below.

#### Description of Marine Mammals in the Area of the Specified Activity

The Beaufort Sea supports a diverse assemblage of marine mammals. Table 1 lists the 12 marine mammal species

under NMFS jurisdiction with confirmed or possible occurrence in the proposed project area.

TABLE 1—MARINE MAMMAL SPECIES WITH CONFIRMED OR POSSIBLE OCCURRENCE IN THE SEISMIC SURVEY AREA

Common name	Scientific name	Status	Occurrence	Seasonality	Range	Abundance
<b>Odontocetes</b>						
Beluga whale (Beaufort Sea stock).	<i>Delphinapterus leucas</i> ..	— .....	Common .....	Mostly spring and fall with some in summer.	Mostly Beaufort Sea.	39,258
Beluga whale (eastern Chukchi Sea stock).	— .....	— .....	Common .....	Mostly spring and fall with some in summer.	Mostly Chukchi Sea.	3,710
Killer whale ** .....	<i>Orcinus orca</i> .....	— .....	Occasional/Extralimital.	Mostly summer and early fall.	California to Alaska.	552
Harbor porpoise ** .....	<i>Phocoena phocoena</i> ....	— .....	Occasional/Extralimital.	Mostly summer and early fall.	California to Alaska.	48,215
Narwhal ** .....	<i>Monodon monoceros</i> ....	— .....	.....	.....	.....	45,358
<b>Mysticetes</b>						
Bowhead whale * .....	<i>Balaena mysticetus</i> .....	Endangered; Depleted.	Common .....	Mostly spring and fall with some in summer.	Russia to Canada.	19,534
Gray whale .....	<i>Eschrichtius robustus</i> ....	— .....	Somewhat common.	Mostly summer	Mexico to the U.S. Arctic Ocean.	19,126
Minke whale ** .....	<i>Balaenoptera acutorostrata</i> .	— .....	.....	.....	.....	810–1,003
Humpback whale *** (Central North Pacific stock).	<i>Megaptera novaeangliae</i>	Endangered; Depleted.	.....	.....	.....	21,063
<b>Pinnipeds</b>						
Bearded seal (Beringia distinct population segment).	<i>Erignathus barbatus</i> .....	Candidate .....	Common .....	Spring and summer.	Bering, Chukchi, and Beaufort Seas.	155,000
Ringed seal * (Arctic stock).	<i>Phoca hispida</i> .....	Threatened; Depleted.	Common .....	Year round .....	Bering, Chukchi, and Beaufort Seas.	300,000
Spotted seal .....	<i>Phoca largha</i> .....	— .....	Common .....	Summer .....	Japan to U.S. Arctic Ocean.	141,479
Ribbon seal ** .....	<i>Histiophoca fasciata</i> ....	Species of concern.	Occasional .....	Summer .....	Russia to U.S. Arctic Ocean.	49,000

\* Species or stocks listed under the Endangered Species Act.

\*\* Species are so rarely sighted in the proposed project area that take is unlikely.

Minke whales are relatively common in the Bering and southern Chukchi Seas and have recently also been sighted in the northeastern Chukchi Sea (Aerts *et al.*, 2013; Clarke *et al.*, 2013). Minke whales are rare in the Beaufort Sea. They have not been reported in the Beaufort Sea during the Bowhead Whale Aerial Survey Project/Aerial Surveys of Arctic Marine Mammals (BWASP/ASAMM) surveys (Clarke *et al.*, 2011, 2012; 2013; Monnet and Treacy, 2005), and there was only one observation in

2007 during vessel-based surveys in the region (Funk *et al.*, 2010). Humpback whales have not generally been found in the Arctic Ocean. However, subsistence hunters have spotted humpback whales in low numbers around Barrow, and there have been several confirmed sightings of humpback whales in the northeastern Chukchi Sea in recent years (Aerts *et al.*, 2013; Clarke *et al.*, 2013). The first confirmed sighting of a humpback whale in the Beaufort Sea was recorded in August 2007 (Hashagen

*et al.*, 2009), when a cow and calf were observed 54 mi east of Point Barrow. No additional sightings have been documented in the Beaufort Sea. Narwhal are common in the waters of northern Canada, west Greenland, and in the European Arctic, but rarely occur in the Beaufort Sea (COSEWIC, 2004). Only a handful of sightings have occurred in Alaskan waters (Allen and Angliss, 2013). These three species are not considered further in this proposed IHA notice. Both the walrus and the

polar bear could occur in the U.S. Beaufort Sea; however, these species are managed by the U.S. Fish and Wildlife Service (USFWS) and are not considered further in this Notice of Proposed IHA.

The Beaufort Sea is a main corridor of the bowhead whale migration route. The main migration periods occur in spring from April to June and in fall from late August/early September through October to early November. During the fall migration, several locations in the U.S. Beaufort Sea serve as feeding grounds for bowhead whales. Small numbers of bowhead whales that remain in the U.S. Arctic Ocean during summer also feed in these areas. The U.S. Beaufort Sea is not a main feeding or calving area for any other cetacean species. Ringed seals breed and pup in the Beaufort Sea; however, this does not occur during the summer or early fall. Further information on the biology and local distribution of these species can be found in SAE's application (see ADDRESSES) and the NMFS Marine Mammal Stock Assessment Reports, which are available online at: <http://www.nmfs.noaa.gov/pr/species/>.

Potential Effects of the Specified Activity on Marine Mammals

Operating active acoustic sources such as airgun arrays, navigational sonars, and vessel activities have the potential for adverse effects on marine mammals. Potential effects from SAE's 3D OBN seismic surveys on marine mammals in the U.S. Beaufort Sea are discussed in the "Potential Effects of the Specified Activity on Marine Mammals" section of the Federal Register notice for the proposed IHA (80 FR 20084; April 14, 2015). No changes have been made to the discussion contained in this section of the Federal Register notice for the proposed IHA.

Anticipated Effects on Habitat

The primary potential impacts to marine mammal habitat are associated with elevated sound levels produced by airguns and vessels and their effects on marine mammal prey species. These potential effects from SAE's 3D OBN seismic survey are discussed in the

"Anticipated Effects on Marine Mammal Habitat" section of the Federal Register notice for the proposed IHA (80 FR 20084; April 14, 2015). No changes have been made to the discussion contained in this section of the Federal Register notice for the proposed IHA.

Mitigation Measures

In order to issue an incidental take authorization under section 101(a)(5)(D) of the MMPA, NMFS must set forth the permissible methods of taking pursuant to such activity, and other means of effecting the least practicable adverse impact on such species or stock and its habitat, paying particular attention to rookeries, mating grounds, and areas of similar significance, and on the availability of such species or stock for taking for certain subsistence uses.

For the SAE open-water 3D OBN seismic surveys in the Beaufort Sea, NMFS is requiring SAE to implement the following mitigation measures to minimize the potential impacts to marine mammals in the project vicinity as a result of its survey activities. The primary purpose of these mitigation measures is to detect marine mammals within or about to enter designated exclusion zones and to initiate immediate shutdown or power down of the airgun(s).

Besides the mitigation measures that were proposed in the Federal Register notice (80 FR 20084; March 14, 2015), NMFS included two additional measures that require SAE (1) refrain from initiating or cease seismic activities if an aggregation of bowhead or gray whales (i.e., 12 or more whales of any age/sex class that appear to be engaged in a non-migratory, significant biological behavior (e.g., feeding, socializing)) is observed within the Level B harassment zone; and (2) operate a mitigation airgun at a rate of 1 shot per minute. A detailed discussion of the mitigation measures are provided below.

(1) Establishing Exclusion and Disturbance Zones

Under current NMFS guidelines, the "exclusion zone" for marine mammal exposure to impulse sources is

customarily defined as the area within which received sound levels are ≥180 dB (rms) re 1 μPa for cetaceans and ≥190 dB (rms) re 1 μPa for pinnipeds. These safety criteria are based on an assumption that SPL received at levels lower than these will not injure these animals or impair their hearing abilities, but at higher levels might have some such effects. Disturbance or behavioral effects to marine mammals from underwater sound may occur after exposure to sound at distances greater than the exclusion zones (Richardson et al. 1995). Currently, NMFS uses 160 dB (rms) re 1 μPa as the threshold for Level B behavioral harassment from impulse noise.

In 2014, Heath et al. (2014) conducted a sound source verification (SSV) of the very same 620-in<sup>3</sup> array SAE plans to use in 2015. The SSV was conducted in generally the same survey area of SAE's planned 2015 work. They empirically determined that the distances to the 190, 180, and 160 dB isopleths for sound pressure levels emanating from the 620-in<sup>3</sup> array was 195, 635, and 1,820 m, respectively (Table 3). Heath et al. (2014) also measured sound pressure levels from an active 10-in<sup>3</sup> gun during SAE's 2014 Beaufort operations and found noise levels exceeding 190 dB extended out 54 m, exceeding 180 dB out to 188 m, and exceeding 160 dB out to 1,050 m (Table 2).

Sound source studies have not been done for the 1,240-in<sup>3</sup> array; however, Austin and Warner (2013) conducted a sound source verification of a 1,200-in<sup>3</sup> array operated by SAE in Cook Inlet found the radius to the 190 dB isopleth to be 250 m, to the 180 dB isopleth to be 910 m, and to the 160 dB isopleth to be 5,200 m. These are the distance values SAE intends to use before the SSV for the 1,240 in<sup>3</sup> airgun arrays are obtained before the survey. If SAE plans to use the 1,240 in<sup>3</sup> airgun arrays, SSV of these zones will be empirically measured before the 2015 open-water seismic survey for monitoring and mitigation measures.

TABLE 2—SUMMARY OF AIRGUN ARRAY SOURCE LEVELS AND PROPOSED EXCLUSION ZONE AND ZONES OF INFLUENCE RADII

Array size (in <sup>3</sup> )	Source level (dB)	190 dB radius (m)	180 dB radius (m)	160 dB radius (m)
10 .....	195	54	188	1,050
620 .....	218	195	635	1,820
1,240 * .....	224	250	910	5,200

\* Denotes modelled source level that need to be empirically measured before the seismic survey.

### (2) Vessel Related Mitigation Measures

These mitigation measures apply to all vessels that are part of SAE's Beaufort Sea seismic survey activities, including supporting vessels.

- Avoid concentrations or groups of whales. Operators of vessels should, at all times, conduct their activities at the maximum distance possible from such concentrations or groups of whales.
- If any vessel approaches within 1.6 km (1 mi) of observed whales, except when providing emergency assistance to whalers or in other emergency situations, the vessel operator will take reasonable precautions to avoid potential interaction with the whales by taking one or more of the following actions, as appropriate:
  - Reducing vessel speed to less than 5 knots within 300 yards (900 feet or 274 m) of the whale(s);
  - Steering around the whale(s) if possible;
  - Operating the vessel(s) in such a way as to avoid separating members of a group of whales from other members of the group;
  - Operating the vessel(s) to avoid causing a whale to make multiple changes in direction; and
  - Checking the waters immediately adjacent to the vessel(s) to ensure that no whales will be injured when the propellers are engaged.
- Reduce vessel speed, not to exceed 5 knots, when weather conditions require, such as when visibility drops, to avoid the likelihood of injury to whales.

### (3) Mitigation Measures for Airgun Operations

The primary requirements for airgun mitigation during the seismic surveys are to monitor marine mammals near the airgun array during all daylight airgun operations and during any nighttime start-up of the airguns and, if any marine mammals are observed, to adjust airgun operations, as necessary, according to the mitigation measures described below. During the seismic surveys, Protected Species Observers (PSOs) will monitor the pre-established exclusion zones for the presence of marine mammals. When marine mammals are observed within, or about to enter, designated safety zones, PSOs have the authority to call for immediate power down (or shutdown) of airgun operations, as required by the situation. A summary of the procedures associated with each mitigation measure is provided below.

#### Ramp Up Procedure

A ramp up of an airgun array provides a gradual increase in sound levels, and

involves a step-wise increase in the number and total volume of airguns firing until the full volume is achieved. The purpose of a ramp up (or "soft start") is to "warn" cetaceans and pinnipeds in the vicinity of the airguns and to provide time for them to leave the area and thus avoid any potential injury or impairment of their hearing abilities.

During the open-water survey program, the seismic operator will ramp up the airgun arrays slowly. Full ramp ups (*i.e.*, from a cold start after a shutdown, when no airguns have been firing) will begin by firing a single airgun in the array (*i.e.*, the mitigation airgun). A full ramp up, after a shutdown, will not begin until there has been a minimum of 30 minutes of observation of the safety zone by PSOs to assure that no marine mammals are present. The entire exclusion zone must be visible during the 30-minute lead-in to a full ramp up. If the entire exclusion zone is not visible, then ramp up from a cold start cannot begin. If a marine mammal is sighted within the exclusion zone during the 30-minute watch prior to ramp up, ramp up will be delayed until the marine mammal is sighted outside of the exclusion zone or the animal is not sighted for at least 15 minutes, for small odontocetes (harbor porpoise) and pinnipeds, or 30 minutes, for baleen whales and large odontocetes (including beluga and killer whales and narwhal).

#### Use of a Small-Volume Airgun During Turns and Transits

Throughout the seismic survey, during turning movements and short transits, SAE will employ the use of the smallest-volume airgun (*i.e.*, "mitigation airgun") to deter marine mammals from being within the immediate area of the seismic operations. The mitigation airgun will be operated at approximately one shot per minute and will not be operated for longer than three hours in duration (turns may last two to three hours for the project).

During turns or brief transits (*i.e.*, less than three hours) between seismic tracklines, one mitigation airgun will continue operating. The ramp up procedures described above will be followed when increasing the source levels from the one mitigation airgun to the full airgun array. However, keeping one airgun firing during turns and brief transits will allow SAE to resume seismic surveys using the full array without having to ramp up from a "cold start," which requires a 30-minute observation period of the full exclusion zone and is prohibited during darkness or other periods of poor visibility. PSOs

will be on duty whenever the airguns are firing during daylight and during the 30-minute periods prior to ramp-ups from a "cold start."

#### Power Down and Shutdown Procedures

A power down is the immediate reduction in the number of operating energy sources from all firing to some smaller number (*e.g.*, a single mitigation airgun). A shutdown is the immediate cessation of firing of all energy sources. The array will be immediately powered down whenever a marine mammal is sighted approaching close to or within the applicable exclusion zone of the full array, but is outside the applicable exclusion zone of the single mitigation airgun. If a marine mammal is sighted within or about to enter the applicable exclusion zone of the single mitigation airgun, the entire array will be shut down (*i.e.*, no sources firing). In addition, SAE will implement shutdown measures when aggregations of bowhead whales or gray whales that appear to be engaged in non-migratory significant biological behavior (*e.g.*, feeding, socializing) are observed within the 160-dB harassment zone around the seismic operations.

#### No Seismic Survey With Presence of Aggregation of Whales

SAE shall refrain from initiating or cease seismic activities if an aggregation of bowhead or gray whales (*i.e.*, 12 or more whales of any age/sex class that appear to be engaged in a non-migratory, significant biological behavior (*e.g.*, feeding, socializing)) is observed within the Level B harassment Zone.

#### Poor Visibility Conditions

SAE plans to conduct 24-hour operations. PSOs will not be on duty during ongoing seismic operations during darkness, given the very limited effectiveness of visual observation at night (there will be no periods of darkness in the survey area until mid-August). The provisions associated with operations at night or in periods of poor visibility include the following:

- If during foggy conditions, heavy snow or rain, or darkness (which may be encountered starting in late August), the full 180 dB exclusion zone is not visible, the airguns cannot commence a ramp-up procedure from a full shutdown.
- If one or more airguns have been operational before nightfall or before the onset of poor visibility conditions, they can remain operational throughout the night or poor visibility conditions. In this case ramp-up procedures can be initiated, even though the exclusion

zone may not be visible, on the assumption that marine mammals will be alerted by the sounds from the single airgun and have moved away.

#### Mitigation Conclusions

NMFS has carefully evaluated SAE's mitigation measures and considered a range of other measures in the context of ensuring that NMFS prescribes the means of effecting the least practicable impact on the affected marine mammal species and stocks and their habitat. Our evaluation of potential measures included consideration of the following factors in relation to one another:

- The manner in which, and the degree to which, the successful implementation of the measures are expected to minimize adverse impacts to marine mammals;
- The proven or likely efficacy of the specific measure to minimize adverse impacts as planned; and
- The practicability of the measure for applicant implementation.

Any mitigation measure(s) prescribed by NMFS should be able to accomplish, have a reasonable likelihood of accomplishing (based on current science), or contribute to the accomplishment of one or more of the general goals listed below:

1. Avoidance or minimization of injury or death of marine mammals wherever possible (goals 2, 3, and 4 may contribute to this goal).

2. A reduction in the numbers of marine mammals (total number or number at biologically important time or location) exposed to received levels of seismic airguns, or other activities expected to result in the take of marine mammals (this goal may contribute to 1, above, or to reducing harassment takes only).

3. A reduction in the number of times (total number or number at biologically important time or location) individuals would be exposed to received levels of seismic airguns or other activities expected to result in the take of marine mammals (this goal may contribute to 1, above, or to reducing harassment takes only).

4. A reduction in the intensity of exposures (either total number or number at biologically important time or location) to received levels of seismic airguns or other activities expected to result in the take of marine mammals (this goal may contribute to 1, above, or to reducing the severity of harassment takes only).

5. Avoidance or minimization of adverse effects to marine mammal habitat, paying special attention to the food base, activities that block or limit passage to or from biologically

important areas, permanent destruction of habitat, or temporary destruction/disturbance of habitat during a biologically important time.

6. For monitoring directly related to mitigation—an increase in the probability of detecting marine mammals, thus allowing for more effective implementation of the mitigation.

Based on our evaluation of these mitigation measures, NMFS has determined that the proposed mitigation measures provide the means of effecting the least practicable impact on marine mammals species or stocks and their habitat, paying particular attention to rookeries, mating grounds, and areas of similar significance. Mitigation measures to ensure availability of such species or stock for taking for certain subsistence uses are discussed later in this document (see “Impact on Availability of Affected Species or Stock for Taking for Subsistence Uses” section).

#### Monitoring and Reporting

In order to issue an ITA for an activity, section 101(a)(5)(D) of the MMPA states that NMFS must set forth, “requirements pertaining to the monitoring and reporting of such taking.” The MMPA implementing regulations at 50 CFR 216.104(a)(13) indicate that requests for ITAs must include the suggested means of accomplishing the necessary monitoring and reporting that will result in increased knowledge of the species and of the level of taking or impacts on populations of marine mammals that are expected to be present in the action area. SAE submitted a marine mammal monitoring plan as part of the IHA application.

Monitoring measures prescribed by NMFS should accomplish one or more of the following general goals:

1. An increase in our understanding of the likely occurrence of marine mammal species in the vicinity of the action, *i.e.*, presence, abundance, distribution, and/or density of species.

2. An increase in our understanding of the nature, scope, or context of the likely exposure of marine mammal species to any of the potential stressor(s) associated with the action (*e.g.*, sound or visual stimuli), through better understanding of one or more of the following: The action itself and its environment (*e.g.*, sound source characterization, propagation, and ambient noise levels); the affected species (*e.g.*, life history or dive pattern); the likely co-occurrence of marine mammal species with the action (in whole or part) associated with

specific adverse effects; and/or the likely biological or behavioral context of exposure to the stressor for the marine mammal (*e.g.*, age class of exposed animals or known pupping, calving or feeding areas).

3. An increase in our understanding of how individual marine mammals respond (behaviorally or physiologically) to the specific stressors associated with the action (in specific contexts, where possible, *e.g.*, at what distance or received level).

4. An increase in our understanding of how anticipated individual responses, to individual stressors or anticipated combinations of stressors, may impact either: The long-term fitness and survival of an individual; or the population, species, or stock (*e.g.*, through effects on annual rates of recruitment or survival).

5. An increase in our understanding of how the activity affects marine mammal habitat, such as through effects on prey sources or acoustic habitat (*e.g.*, through characterization of longer-term contributions of multiple sound sources to rising ambient noise levels and assessment of the potential chronic effects on marine mammals).

6. An increase in understanding of the impacts of the activity on marine mammals in combination with the impacts of other anthropogenic activities or natural factors occurring in the region.

7. An increase in our understanding of the effectiveness of mitigation and monitoring measures.

8. An increase in the probability of detecting marine mammals (through improved technology or methodology), both specifically within the safety zone (thus allowing for more effective implementation of the mitigation) and in general, to better achieve the above goals.

#### Monitoring Measures

Monitoring will provide information on the numbers of marine mammals potentially affected by the exploration operations and facilitate real-time mitigation to prevent injury of marine mammals by industrial sounds or activities. These goals will be accomplished in the Beaufort Sea during 2015 by conducting vessel-based monitoring and passive acoustic monitoring to document marine mammal presence and distribution in the vicinity of the survey area.

Visual monitoring by PSOs during seismic survey operations, and periods when these surveys are not occurring, will provide information on the numbers of marine mammals potentially affected by these activities and facilitate

real-time mitigation to prevent impacts to marine mammals by industrial sounds or operations. Vessel-based PSOs onboard the survey vessels and mitigation vessel will record the numbers and species of marine mammals observed in the area and any observable reaction of marine mammals to the survey activities in the Beaufort Sea.

Besides the monitoring measures that were proposed in the **Federal Register** notice (80 FR 20084; March 14, 2015), NMFS included several additional measures based on the Commission and peer-review recommendations. These additional monitoring measures include: (1) NMFS evaluation of empirically measured exclusion zones and zone of influence before they are adopted; (2) conducting SSV if SAE plans to use the 1,240 in<sup>3</sup> airgun array for seismic survey; (3) including an additional mitigation vessel for marine mammal monitoring if SAE plans to use the 1,240 in<sup>3</sup> airgun array; (4) deploying more acoustic sensors than the 2014 season for passive acoustic monitoring; and (5) testing a new mooring design with NMFS National Marine Mammal Laboratory for microMARS to be deployed in shallow water.

Details of the monitoring measures are described below.

#### *Visual-Based PSOs*

The visual-based marine mammal monitoring will be implemented by a team of experienced PSOs, including both biologists and Inupiat personnel. PSOs will be stationed aboard both survey vessels through the duration of the project. The vessel-based marine mammal monitoring will provide the basis for real-time mitigation measures as discussed in the Mitigation Measures section. In addition, monitoring results of the vessel-based monitoring program will include the estimation of the number of "takes" as stipulated in the IHA.

#### (1) PSOs

Vessel-based monitoring for marine mammals will be done by trained PSOs throughout the period of survey activities. The observers will monitor the occurrence of marine mammals near the survey vessel during all daylight periods during operation, and during most daylight periods when operations are not occurring. PSO duties will include watching for and identifying marine mammals; recording their numbers, distances, and reactions to the survey operations; and documenting "take by harassment."

A total of 2 PSOs will be required onboard each survey vessel to meet the following criteria:

- 100% monitoring coverage during all periods of survey operations in daylight;
- At least two PSOs conducting vessel-based visual monitoring from both vessels during all time;
- Maximum of 4 consecutive hours on watch per PSO; and
- Maximum of 12 hours of watch time per day per PSO.

PSO teams will consist of Inupiat observers and experienced field biologists. Each vessel will have an experienced field crew leader to supervise the PSO team. The total number of PSOs may decrease later in the season as the duration of daylight decreases.

#### (2) PSO Role and Responsibilities

When onboard the seismic and support vessels, there are three major parts to the PSO position:

- Observe and record sensitive wildlife species;
- Ensure mitigation procedures are followed accordingly; and
- Follow monitoring and data collection procedures.

The main roles of the PSO and the monitoring program are to ensure compliance with requirements set in place by NMFS to ensure that disturbance of marine mammals is minimized, and potential effects on marine mammals are documented. The PSOs will implement the monitoring and mitigation measures specified in the IHA. The primary purposes of the PSOs on board of the vessels are:

- Mitigation: Implement mitigation clearing and ramp up measures, observe for and detect marine mammals within, or about to enter the applicable safety zone and implement necessary shut down, power down and speed/course alteration mitigation procedures when applicable. Advise marine crew of mitigation procedures.
- Monitoring: Observe for marine mammals and determine numbers of marine mammals exposed to sound pulses and their reactions (where applicable) and document those as required.

#### (3) Observer Qualifications and Training

Crew leaders and most PSOs will be individuals with experience as observers during recent seismic, site clearance and shallow hazards, and other monitoring projects in Alaska or other offshore areas in recent years. New or inexperienced PSOs will be paired with an experienced PSO or experienced field biologist so that the

quality of marine mammal observations and data recording is kept consistent.

Biologist-observers will have previous marine mammal observation experience, and field crew leaders will be highly experienced with previous vessel-based marine mammal monitoring and mitigation projects. Resumes for those individuals will be provided to NMFS for review and acceptance of their qualifications. Inupiat observers will be experienced in the region and familiar with the marine mammals of the area. All observers will complete a NMFS-approved observer training course designed to familiarize individuals with monitoring and data collection procedures.

PSOs will complete a 2- or 3-day training and refresher session on marine mammal monitoring, to be conducted shortly before the anticipated start of the 2015 open-water season. Any exceptions will have or receive equivalent experience or training. The training session(s) will be conducted by qualified marine mammalogists with extensive crew-leader experience during previous vessel-based seismic monitoring programs.

#### (4) Marine Mammal Observer Protocol

Source vessels will employ PSOs to identify marine mammals during all hours of airgun operations. To better observe the exclusion zone, a lead PSO, one or two PSOs, and an Inupiat communicator will be on the primary source vessel and two PSOs will be stationed aboard the secondary source vessel. (The total number of observers is limited by available berthing space aboard the vessels.) The three to four total observers aboard the primary source vessel will allow two observers simultaneously on watch during daylight hours.

The PSOs will watch for marine mammals during all periods of source operations and for a minimum of 30 minutes prior to the planned start of airgun or pinger operations after an extended shutdown. Marine mammal monitoring shall continue throughout airgun operations and last for 30 minutes after the finish of airgun firing. SAE vessel crew and operations personnel will also watch for marine mammals, as practical, to assist and alert the PSOs for the airgun(s) to be shut down if marine mammals are observed in or about to enter the exclusion zone.

The PSOs will watch for marine mammals from the best available vantage point on the survey vessels, typically the bridge. The PSOs will scan the area around the vessel systematically with reticle binoculars

(e.g.,  $7 \times 50$  and  $16\text{--}40 \times 80$ ) and with the naked eye. Laser range finders (Leica LRF 1200 laser rangefinder or equivalent) will be available to assist with distance estimation.

The observers will give particular attention to the areas within the marine mammal exclusion zones around the source vessels. These zones are the maximum distances within which received levels may exceed 180 dB (rms) re 1  $\mu$ Pa (rms) for cetaceans, or 190 dB (rms) re 1  $\mu$ Pa for pinnipeds.

When a marine mammal is seen approaching or within the exclusion zone applicable to that species, the seismic survey crew will be notified immediately so that mitigation measures called for in the applicable authorization(s) can be implemented.

Night-vision equipment (Generation 3 binocular image intensifiers or equivalent units) will be available for use if and when needed. Past experience with night-vision devices (NVDs) in the Beaufort Sea and elsewhere has indicated that NVDs are not nearly as effective as visual observation during daylight hours (e.g., Harris *et al.* 1997, 1998; Moulton and Lawson 2002).

#### (5) Dedicated Monitoring Vessel

If SAE decides to use the 1,240 in<sup>3</sup> airgun array, an additional dedicated visual monitoring vessel will be employed to assist marine mammal monitoring due to the larger exclusion zones and zone of influence from this larger airgun array. A minimum of 2 PSOs will be positioned on this dedicated monitoring vessel.

#### (6) Field Data-Recording

The PSOs will record field observation data and information about marine mammal sightings that include:

- Species, group size, age/size/sex categories (if determinable);
- Physical description of features that were observed or determined not to be present in the case of unknown or unidentified animals;
- Behavior when first sighted and after initial sighting, heading (if consistent);
- Bearing and distance from observer, apparent reaction to activities (e.g., none, avoidance, approach, paralleling, etc.), closest point of approach, and behavioral pace;
- Time, location, speed, and activity of the source and mitigation vessels, sea state, ice cover, visibility, and sun glare; and
- Positions of other vessel(s) in the vicinity.

### Acoustic Monitoring

#### (1) Sound Source Measurements

Since the same airgun array of 620 in<sup>3</sup> and a single mitigation airgun of 10 in<sup>3</sup> to be used were empirically measured in the generally same seismic survey vicinity in 2014 (Heath 2014), NMFS does not think additional SSV tests for this array and a single airgun are necessary for the 2015 seismic survey. However, if SAE decides to use the 1,240 in<sup>3</sup> airgun arrays for deeper water, SSV on these arrays is required before the commencement of the surveys. Results of the acoustic characterization and SSV will be used to establish the 190 dB, 180 dB, 170 dB, and 160 dB isopleths for the 1,240 in<sup>3</sup> airgun arrays.

The results of the SSV will be submitted to NMFS within five days after completing the measurements, followed by a report to be submitted within 14 days after completion of the measurements. A more detailed report will be provided to NMFS as part of the required 90-day report following completion of the acoustic program.

NMFS will evaluate the empirically measured exclusion zones and zone of influence from the 1,240 in<sup>3</sup> before they are formally established for mitigation and monitoring measures.

#### (2) Passive Acoustic Monitoring

SAE will conduct Passive Acoustical Monitoring (PAM) using microMARS. These sensors will be deployed on the seabed and will record continuously at 64 kHz sample rate and 16-bit samples. The recorders will be calibrated and their mooring designs tested prior to deployment.

#### PAM Deployment

Passive acoustic monitoring package will be deployed at the four corners of SAE's survey site. Each PAM package will include two microMARS units coupled with an ARC-1 release device, a float and a retrievable mooring. Deploying two microMARS at each monitoring location will allow redundancy in the system to reduce the likelihood of failures and/or data loss.

PAM will be deployed before the SAE's proposed 3D seismic survey and remain at the study site during the entire survey period.

#### Data Analysis

Acoustic data will be analyzed for two frequency bands, low (below 2 kHz for baleen whales and low-frequency noise) and high (2 kHz–32 kHz for beluga whales and high-frequency noise). This will allow sounds produced by different species and anthropogenic sources to be reviewed and analyzed in greater detail.

Specialized acoustic review and analysis software, Triton will be used to create long-term spectral averages (LTSAs) for all acoustic files downloaded from the recorders.

Once LTSAs of all the acoustic data have been created and preliminarily reviewed, experienced bioacoustic data analysts will perform a detailed review of the data. Analysts will log the time of occurrence of all biological sounds, seismic source events (if audible), and other relevant acoustic signals (e.g. ships, small boats, and other noise events). Combined event log data will then be organized into tables to provide summaries including (1) the number and type of acoustic events; (2) the number of days each event occurred at each site; and (3) event durations for each deployment and site. Graphs of daily event occurrence will be made for each identified marine mammal species that have sufficient data to plot. Graphs of the percentage of time for which signals from each species were detected with respect to total recording time at each site will be plotted by species.

Noise analysis will be performed on all recorded acoustic data. Sound levels will be measured for full and octave frequency bands. This analysis will be conducted using automated algorithms that measure root-mean-square (RMS) sound pressure level (SPL) each octave bands. These results will be averaged both hourly and daily to provide a synoptic representation of the ambient noise levels present at each location for each of the different frequency bands measured.

#### Monitoring Plan Peer Review

The MMPA requires that monitoring plans be independently peer reviewed "where the proposed activity may affect the availability of a species or stock for taking for subsistence uses" (16 U.S.C. 1371(a)(5)(D)(ii)(III)). Regarding this requirement, NMFS' implementing regulations state, "Upon receipt of a complete monitoring plan, and at its discretion, [NMFS] will either submit the plan to members of a peer review panel for review or within 60 days of receipt of the proposed monitoring plan, schedule a workshop to review the plan" (50 CFR 216.108(d)).

NMFS established an independent peer review panel to review SAE's 4MP for the proposed 3D seismic survey in the Beaufort Sea. The panel met in early March 2015, and provided comments and recommendations to NMFS in April 2015. The full panel report can be viewed on the Internet at: <http://www.nmfs.noaa.gov/pr/permits/incidental.htm>.

NMFS provided the panel with SAE's IHA application and monitoring plan and asked the panel to answer the following questions:

1. Will the applicant's stated objectives effectively further the understanding of the impacts of their activities on marine mammals and otherwise accomplish the goals stated above? If not, how should the objectives be modified to better accomplish the goals above?

2. Can the applicant achieve the stated objectives based on the methods described in the plan?

3. Are there technical modifications to the proposed monitoring techniques and methodologies proposed by the applicant that should be considered to better accomplish their stated objectives?

4. Are there techniques not proposed by the applicant (*i.e.*, additional monitoring techniques or methodologies) that should be considered for inclusion in the applicant's monitoring program to better accomplish their stated objectives?

5. What is the best way for an applicant to present their data and results (formatting, metrics, graphics, etc.) in the required reports that are to be submitted to NMFS (*i.e.*, 90-day report and comprehensive report)?

The peer-review panel report contains recommendations that the panel members felt were applicable to the SAE's monitoring plans. The peer-review panel believed that the objectives for both vessel-based and passive acoustic monitoring were appropriate. The panel also agreed that the objectives of real-time mitigation of potential disturbance of marine mammals would be mostly met through visual monitoring. However, there are some limitations associated with PSOs' ability to monitor the entire safety radii at all times. Specific panel recommendations are provided below.

(1) If SAE decides to use the larger airgun array (*i.e.*, the 1,240 in<sup>3</sup> array), SAE should conduct sound source verification;

(2) SAE should have an additional observer on the secondary source vessel such that at least two observers are on watch during all daylight hours;

(3) If SAE uses the 1,240 in<sup>3</sup> airgun array and the measured safety radii (exclusion zones) in the Beaufort Sea are similar to the measurement done in Cook Inlet (250 m for 190 dB and 910 m for 180 dB), SAE should have a dedicated scout (monitoring) vessel with at least 2 PSOs to monitor the 180 dB exclusion zone (910 m);

(4) If the seismic surveys are offshore, more acoustic sensors are needed at

more locations than what is presented by SAE at the peer-review meeting (one sensor at each of the four corners);

(5) microMARS used for SAE should be deployed well before the seismic surveys begin in order to collect baseline data before all the vessels are operative in the area and the airgun arrays begin operating;

(6) SAE should develop a more compact mooring design for microMARS that are deployed in shallow waters, particularly because of the compact size of these recorders;

(7) Additional testing to be conducted to verify PAM recorders' performance due to the limited or non-existent field experience in long term deployments and cold Arctic waters;

(8) Improve the effectiveness of monitoring by using Unmanned Aerial Systems for monitoring of marine mammals in the Beaufort Sea;

(9) Provide information in the reports about how the detections obtained by the microMARS are ground-truthed;

(10) Acoustic characteristics of the identified noise sources be included in the reports to provide a better understanding of source levels and the robustness of SSV results, and other acoustic characteristics of the seismic survey equipment, such as spectral content, and received levels in different metrics such as RMS dB, cSEL 24h, dB peak to peak, and 1/3 octave bands;

(11) Sightability curves be included in the reports as much as possible;

(12) Coordinate and collaborate with other companies (such as Caelus and Repsol) for monitoring the aggregated effects of all their activities on spotted seals, especially animals that may be hauled out; and

(13) Continue to make all environmental data (including PSO observations, acoustic monitoring, vessel track lines and timing of operations) available to the general public.

In addition, though not solicited as part of the independent peer review of the monitoring, the peer review panel also recommended the following mitigation measures:

(1) SAE should limit seismic operations at night or during periods of low visibility because PSOs' ability to detect marine mammals entering the safety zone is limited;

(2) If a bowhead whale mother/calf pair or an aggregation of three or more bowhead whales are sighted within the Level B harassment zone prior to the onset of night or during that day, SAE could be more cautious during darkness based on the potential risk to marine mammals. If the risk is relatively high,

it might be decided that airguns should be shut down for the night;

(3) SAE should not use a mitigation gun for longer than one hour, which is the equivalent amount of time for surveying the safety radii plus ramp up; and

(4) Mitigation gun should be shot only once every minute instead of every few seconds.

NMFS discussed the peer review panel report and the list of recommendations with SAE. For the aforementioned monitoring measures, NMFS requires and SAE agrees to implement the following:

(1) Conducting sound source verification if the 1,240 in<sup>3</sup> airgun array is used in the proposed 3D seismic survey;

(2) Mobilizing a dedicated scout (monitoring) vessel with at least 2 PSOs onboard to monitor the 180 dB exclusion zone (910 m) if the SSV test show that the 180 dB radius of the exclusion zone from the 1,240 in<sup>3</sup> airgun array is 910 m or larger;

(3) Deploying microMARS used for PAM at least three days before the seismic surveys till three days after the seismic survey in order to collect data for comparing the sound field before, during, and after the seismic survey;

(4) Deploying two microMARS units at each of the four corners (total of 8 microMARS units);

(5) Developing a more compact mooring design for microMARS that are deployed in shallow waters, particularly because of the compact size of these recorders;

(6) Conducting tests and calibration to verify PAM recorders' performance prior to deployment;

(7) Including sightability curves in the 90-day report;

(8) Making all environmental data (including PSO observations, acoustic monitoring, vessel track lines and timing of operations) available for valid scientific research.

In addition, NMFS worked with SAE on the following 5 of the panel recommendations and determined that these will also be required in the IHA issued to SAE with clarification and certain modifications to make them practicable for implementation. These measures are listed below:

(1) Regarding the number of PSOs onboard the secondary source vessel, this is to clarify that SAE plans to have two PSOs on both source vessels, and they will be working on a shift described earlier in the "Monitoring Measure" section of this document. Therefore, at any given time, there will be 2 PSOs monitoring from both source vessels. NMFS notes that the number of



PSOs is limited by the available berth on the seismic vessel. The source vessels SAE plan to use are small, and therefore, could only afford maximum of 2 PSOs onboard each vessel.

(2) Regarding ground-truth information in the reports about microMARS detection, SAE states that it should be able to identify bowhead and beluga calls from acoustic recordings. However, SAE states that it will be difficult to identify pinniped calls for species identification at distances, especially at the locations where the microMARS are deployed there will be no PSOs on watch to verify the calling animals. Therefore, ground-truth of acoustic data to specific species calls would not be possible. Nevertheless, as stated earlier, SAE will make the acoustic data available to researchers who are interested in studies that will shed light on marine mammal call identification.

(3) Regarding acoustic characteristics of the identified noise sources, and other acoustic characteristics of the seismic survey equipment, such as spectral content, and received levels in different metrics such as RMS dB, cSEL 24h, dB peak to peak, and 1/3 octave bands, SAE will work with its contractor to characterize the identified noise sources as much as possible within the limits of the microMARS. However, SAE states that some of the requested data analysis would require knowing not only the real-time distance of each noise sources, but the aspect (e.g., forward, endfire) of the array as well. SAE states that for cost reasons, SAE cannot afford extended acoustic analysis beyond identified source characterization. Nevertheless, SAE will make the acoustic data available to researchers who are interested in additional studies of the noise field from data collected by SAE. In the IHA issued to SAE, NMFS requires that SAE at least perform basic acoustic characteristics of the identified noise sources that include spectral content and received levels in different metrics such as RMS dB, cSEL 24h, dB peak to peak, and 1/3 octave bands.

(4) Regarding coordinating and collaborating with other companies (such as Caelus and Repsol) for monitoring the aggregated effects of all their activities on spotted seals, especially animals that may be hauled out, SAE responded that they attempted to coordinate with other companies last year for spotted seal monitoring, but none agreed to cooperate. In addition, at this point it is unclear whether any other companies in the Beaufort Sea may be conducting pinnipeds haul-out aerial surveys in the 2015 open-water

season. Nevertheless, NMFS encourages SAE again to seek cooperation with other companies who may be conducting aerial surveys with the goal that information collected during those surveys will assist SAE in monitoring pinnipeds use of haul-out sites before, during, and after SAE's planned seismic survey.

The only recommendation from the peer-review panel SAE is not able to implement is the utilization of Unmanned Aerial Systems (UAS) for monitoring of marine mammals in the Beaufort Sea for marine mammal monitoring. The major reason for this is that using UAS for marine mammal monitoring is still not a proven technology to provide an effective monitoring modality. The resolution from the UAS video camera does not have high resolution, especially for pinniped survey due to the small size of the animals. In addition, SAE states that the expense of flying a UAS is cost-prohibitive for the company. NMFS agrees with SAE's reasoning. Therefore, this recommendation is not included in the IHA issued to SAE.

With regards to the panel's mitigation recommendations, NMFS agrees with the panel that mitigation airgun should be fired at a rate of 1 shot per minute instead of every few seconds. This condition is required in the IHA issued to SAE.

Regarding the remaining three mitigation measures provided by the peer-review panel, SAE and NMFS discussed and decided that it is important to be consistent with existing mitigation practices for typical 3D seismic surveys unless new scientific information is available that warrant a change. These mitigation measures are described in the "Mitigation" section above. These three mitigation recommendations from the panel are addressed and clarified below:

(1) *Limiting seismic operations at night or during periods of low visibility:* This recommendation is not consistent with existing mitigation practices for a typical marine seismic survey, which require no airgun ramping up when the entire exclusion zone cannot be cleared due to low visibility. However, if the entire exclusion zone can be visually cleared by PSOs, a ramp up can be commenced and, as long as no shutdown occurs during the course of the survey, airgun firing can continue into night or during periods of low visibility. By limiting seismic operations at night or during periods of low visibility, SAE would not be able to complete its 3D seismic survey during the project period and would have to come back the following year to

continue their work. This can be cost-prohibitive for the company and will also extend the season when the marine environment is affected.

(2) *Be more cautious during darkness based on the potential risk to marine mammals if a bowhead whale mother/calf pair or an aggregation of three or more bowhead whales are sighted within the Level B harassment zone prior to the onset of night or during that day. If the risk is relatively high, airguns should be shut down for the night:* The panel did not define what constitutes "the risk is relatively high", and without a clear definition, NMFS considers that this recommendation cannot be made into a requirement. Additionally, as discussed in (1) above, ceasing seismic activities at night because bowhead whale mother/calf pair or an aggregation of three or more bowhead whales are sighted within the Level B harassment zone during the day would be cost-prohibitive, especially consider that the potential risk is not identified.

(3) *Mitigation gun not to be operated for more than one hour:* NMFS does not allow extended use of "mitigation airgun" when the seismic survey is not ongoing, just so that the applicant can ramp up at night or without the 30-minute clearance before ramping up airgun arrays. However, NMFS allows a single airgun (so called "mitigation gun") to be kept on for turning from one track to the next and for short transiting purposes. SAE, as well as other seismic surveyors (e.g., BP), state that for 3D seismic surveys, an approximately 3-hour time frame is needed to complete a turn or short transit, and NMFS has been requiring the applicants to use the smallest single airgun for a maximum of 3 hours for turning and short transiting purposes (e.g., IHA to SAE's 3D seismic survey in 2014 open-water season in Beaufort Sea). Further, the panel did not provide a justification for its recommendation of maximum of one-hour use of "mitigation airgun". Therefore, to be consistent with the existing mitigation measures, NMFS again requires that SAE use the "mitigation airgun" for turning and short line transiting only, with a maximum operation time of 3 hours.

#### Reporting Measures

##### (1) Sound Source Verification Report

As discussed earlier, if SAE plans to use the 1,240 in<sup>3</sup> airgun arrays, SSV tests on these arrays will be required. A report on the preliminary results of the sound source verification measurements, including the measured 190, 180, 170, and 160 dB (rms) radii of

the 1,240 in<sup>3</sup> airgun array, would be submitted within 14 days after collection of those measurements at the start of the field season.

## (2) Weekly Reports

SAE will submit weekly reports to NMFS no later than the close of business (Alaska Time) each Thursday during the weeks when seismic surveys take place. The field reports will summarize species detected, in-water activity occurring at the time of the sighting, behavioral reactions to in-water activities, and the number of marine mammals exposed to harassment level noise.

## (3) Monthly Reports

SAE will submit monthly reports to NMFS for all months during which seismic surveys take place. The monthly reports will contain and summarize the following information:

- Dates, times, locations, heading, speed, weather, sea conditions (including Beaufort Sea state and wind force), and associated activities during the seismic survey and marine mammal sightings.
- Species, number, location, distance from the vessel, and behavior of any sighted marine mammals, as well as associated surveys (number of shutdowns), observed throughout all monitoring activities.
- An estimate of the number (by species) of: (i) Pinnipeds that have been exposed to the seismic surveys (based on visual observation) at received levels greater than or equal to 160 dB re 1  $\mu$ Pa (rms) and/or 190 dB re 1  $\mu$ Pa (rms) with a discussion of any specific behaviors those individuals exhibited; and (ii) cetaceans that have been exposed to the geophysical activity (based on visual observation) at received levels greater than or equal to 160 dB re 1  $\mu$ Pa (rms) and/or 180 dB re 1  $\mu$ Pa (rms) with a discussion of any specific behaviors those individuals exhibited.

## (4) Technical Report

The results of SAE's 2015 vessel-based monitoring, including estimates of "take" by harassment, will be presented first in a "90-day" draft Technical Report, to be submitted to NMFS within 90 days after the end of the seismic survey, and then in a final Technical Report, which will address any comments NMFS had on the draft. The Technical Report will include:

- (a) Summaries of monitoring effort (e.g., total hours, total distances, and marine mammal distribution through the study period, accounting for sea state and other factors affecting

visibility and detectability of marine mammals);

(b) Analyses of the effects of various factors influencing detectability of marine mammals (e.g., sea state, number of observers, and fog/glare);

(c) Species composition, occurrence, and distribution of marine mammal sightings, including date, water depth, numbers, age/size/gender categories (if determinable), group sizes, and ice cover;

(d) Data analysis separated into periods when a seismic airgun array (or a single mitigation airgun) is operating and when it is not, to better assess impacts to marine mammals—the final and comprehensive report to NMFS should summarize and plot:

- Data for periods when a seismic array is active and when it is not; and
- The respective predicted received sound conditions over fairly large areas (tens of km) around operations;
- (e) Sighting rates of marine mammals during periods with and without airgun activities (and other variables that could affect detectability), such as:
  - Initial sighting distances versus airgun activity state;
  - Closest point of approach versus airgun activity state;
  - Observed behaviors and types of movements versus airgun activity state;
  - Numbers of sightings/individuals seen versus airgun activity state;
  - Distribution around the survey vessel versus airgun activity state; and
  - Estimates of take by harassment;
- (f) Results from all hypothesis tests, including estimates of the associated statistical power, when practicable;
- (g) Estimates of uncertainty in all take estimates, with uncertainty expressed by the presentation of confidence limits, a minimum-maximum, posterior probability distribution, or another applicable method, with the exact approach to be selected based on the sampling method and data available;

(h) A clear comparison of authorized takes and the level of actual estimated takes;

(i) Acoustic characteristics of the identified noise sources. These should include the acoustic characteristics of the seismic survey equipment, such as spectral content, and received levels in different metrics such as RMS dB, cSEL 24h, dB peak to peak, and 1/3 octave bands; and

(j) Provide sightability curves in the 90-day report.

## (5) Data Sharing and Research Collaboration

- (a) Make all environmental data (including PSO observation, acoustic monitoring, vessel track lines and

timing of operations) available for valid scientific research purposes; and

(b) Make a best effort to coordinate and collaborate with other companies for monitoring the aggregated effects of all their activities on spotted seals, especially animals that many be hauled out.

## (6) Notification of Injured or Dead Marine Mammals

In the unanticipated event that the specified activity clearly causes the take of a marine mammal in a manner prohibited by the IHA, such as a serious injury, or mortality (e.g., ship-strike, gear interaction, and/or entanglement), SAE would immediately cease the specified activities and immediately report the incident to the Chief of the Permits and Conservation Division, Office of Protected Resources, NMFS, and the Alaska Regional Stranding Coordinators. The report would include the following information:

- Time, date, and location (latitude/longitude) of the incident;
- Name and type of vessel involved;
- Vessel's speed during and leading up to the incident;
- Description of the incident;
- Status of all sound source use in the 24 hours preceding the incident;
- Water depth;
- Environmental conditions (e.g., wind speed and direction, Beaufort sea state, cloud cover, and visibility);
- Description of all marine mammal observations in the 24 hours preceding the incident;
- Species identification or description of the animal(s) involved;
- Fate of the animal(s); and
- Photographs or video footage of the animal(s) (if equipment is available).

Activities would not resume until NMFS is able to review the circumstances of the prohibited take. NMFS would work with SAE to determine what is necessary to minimize the likelihood of further prohibited take and ensure MMPA compliance. SAE would not be able to resume its activities until notified by NMFS via letter, email, or telephone.

In the event that SAE discovers a dead marine mammal, and the lead PSO determines that the cause of the death is unknown and the death is relatively recent (i.e., in less than a moderate state of decomposition as described in the next paragraph), SAE would immediately report the incident to the Chief of the Permits and Conservation Division, Office of Protected Resources, NMFS, and the NMFS Alaska Stranding Hotline and/or by email to the Alaska Regional Stranding Coordinators. The report would include the same

information identified in the paragraph above. Activities would be able to continue while NMFS reviews the circumstances of the incident. NMFS would work with SAE to determine whether modifications in the activities are appropriate.

In the event that SAE discovers a dead marine mammal, and the lead PSO determines that the death is not associated with or related to the activities authorized in the IHA (e.g., previously wounded animal, carcass with moderate to advanced decomposition, or scavenger damage), SAE would report the incident to the Chief of the Permits and Conservation Division, Office of Protected Resources, NMFS, and the NMFS Alaska Stranding Hotline and/or by email to the Alaska Regional Stranding Coordinators, within 24 hours of the discovery. SAE would provide photographs or video footage (if available) or other documentation of the stranded animal sighting to NMFS and the Marine Mammal Stranding Network. SAE can continue its operations under such a case.

#### *Monitoring Results From Previously Authorized Activities*

SAE was issued an IHA for a 3D OBN seismic survey in the same area of the proposed 2015 seismic survey in the Beaufort Sea during the 2014 Arctic open-water season. SAE conducted the seismic survey between August 25 and September 30, 2014. The technical report (90-day report) submitted by SAE indicates that one beluga whale and 2 spotted seals were observed within the 180-dB exclusion zones during the survey that prompted immediate shutdown. Two additional spotted seals were detected within the zone of influence when the airgun arrays were firing. Post-activity analysis based on total sighting data concluded that up to approximately 5 beluga whales and 264 pinnipeds (likely all spotted seals due to their large numbers) could be exposed to received levels above 160-dB re 1  $\mu$ Pa. Some of these could be exposed to levels that may have Level A harassment which was not authorized under the previous IHA. Nevertheless, take of Level B harassment were under the take limits allowed by the IHA issued to SAE.

Based on the monitoring results from SAE's 2014 seismic survey, NMFS is re-evaluating the potential effects on marine mammals and requested SAE to conduct analysis on potential Level A takes (see "Estimated Take by Incidental Harassment" section below).

#### **Estimated Take by Incidental Harassment**

Except with respect to certain activities not pertinent here, the MMPA defines "harassment" as: any act of pursuit, torment, or annoyance which (i) has the potential to injure a marine mammal or marine mammal stock in the wild [Level A harassment]; or (ii) has the potential to disturb a marine mammal or marine mammal stock in the wild by causing disruption of behavioral patterns, including, but not limited to, migration, breathing, nursing, breeding, feeding, or sheltering [Level B harassment].

Takes by Level A and Level B harassments of some species are anticipated as a result of SAE's proposed 3D seismic survey. NMFS expects marine mammal takes could result from noise propagation from operation of seismic airguns. NMFS does not expect marine mammals would be taken by collision with seismic and support vessels, because the vessels will be moving at low speeds, and PSOs on the survey vessels and the mitigation vessel will be monitoring for marine mammals and will be able to alert the vessels to avoid any marine mammals in the area.

For impulse sounds, such as those produced by the airguns proposed to be used in SAE's 3D OBN seismic surveys, NMFS uses the 180 and 190 dB (rms) re 1  $\mu$ Pa isopleth to indicate the onset of Level A harassment for cetaceans and pinnipeds, respectively; and the 160 dB (rms) re 1  $\mu$ Pa isopleth for Level B harassment of all marine mammals. SAE provided calculations of the 190-, 180-, and 160-dB isopleths expected to be produced by the proposed seismic surveys and then used those isopleths to estimate takes by harassment. NMFS used those calculations to make the necessary MMPA findings. SAE provided a full description of the methodology used to estimate takes by harassment in its IHA application, which is also provided in the following sections.

#### *Acoustic Footprint*

The acoustical footprint that could cause harassment (Levels A and B) was determined by placing a 160-dB isopleth buffer around the area that would be surveyed (shot) during the 2015 open water season (777 km<sup>2</sup>). SAE stated that for the majority of its proposed 2015 seismic survey, a 620 in<sup>3</sup> airgun array would be used. However, to make conservative impact analysis, SAE uses the acoustic footprint of a large 1,240 in<sup>3</sup> array for this analysis.

There are no precise estimates for the 1,240-in<sup>3</sup> array. The estimated distances to the 160 dB isopleth for the 1,240-in<sup>3</sup> array are based on the sound source measurements from Austin and Warner (2012) for a 1,200-in<sup>3</sup> array in Cook Inlet. The results showed a measured distance of 5.2 km to the 160 dB isopleths (Table 2). Placing a 5.2-km buffer around the 777 km<sup>2</sup> maximum shot area results in an estimated annual ZOI of 1,463 km<sup>2</sup> (565 mi<sup>2</sup>), which is the ZOI value used in the exposure estimate calculations.

Because the exact location of the 2015 shoot area is currently unknown, the distribution of marine mammal habitat within the shoot area is unknown. However, within the 4,562 km<sup>2</sup> potential survey box, 19% (860 km<sup>2</sup>) falls within the 0 to 1.5 m water depth range, 16% (753 km<sup>2</sup>) falls within the 1.5 to 5 m range, 36% (1,635 km<sup>2</sup>) within the 5 to 15 m range, and 29 percent% (1,348 km<sup>2</sup>) within waters greater than 15 m deep (bowhead migration corridor). Thus, not all the area that could be surveyed in 2015 constitutes bowhead summer ( $\leq 5$  m depth) or fall migrating ( $\leq 15$  m depth) habitat. Further, few of the lease areas that could be shot in 2015 extend into the deeper waters of the potential survey box. The distribution of these depth ranges is found in Figure 6–1 of SAE's IHA application.

#### *Marine Mammal Densities*

In the **Federal Register** notice (80 FR 20084; April 14, 2015) for the proposed IHA, NMFS used the aerial survey data (Ferguson and Clarke 2013) collected in the Beaufort Sea during the Aerial Surveys of Arctic Marine Mammals (ASAMM) program in 2012 and 2013 for bowhead whale density calculation. At the time of the proposed IHA stage, 2014 density data had not been vetted. Subsequently, the 2014 aerial survey data for bowhead whale became available, and NMFS was advised by the National Marine Mammal Laboratory (NMML) and NMFS Alaska Regional Office (AKRO) to use the 2008–2014 bowhead and beluga whale survey data and a  $g(0)$  of 0.8696 and  $f(0)$  of 0.07 for density estimates. Both  $g(0)$  and  $f(0)$  are factors used to correct the potential presence of animals not detected and potential missed sighting from the survey. The results showed much higher density for bowhead whale within the SAE's proposed 3D seismic survey area. The revised bowhead whale density, along with densities of other marine mammals that could be affected by SAE's 3D seismic survey, are provided in Table 3.

TABLE 3. MARINE MAMMAL DENSITIES (#/km<sup>2</sup>) IN THE BEAUFORT SEA

Species	Summer	Fall
Bowhead whale .....	0.1674	0.4828
Beluga whale .....	0.0020	0.0057
Ringed seal .....	0.3547	0.2510
Spotted seal .....	0.0177	0.0125
Bearded seal .....	0.0177	0.0125

#### Level B Exposure Calculations

In the **Federal Register** notice (80 FR 20084; April 14, 2015) for the proposed IHA, NMFS performed marine mammal take estimates by multiplying animal density and the total ensonified area of the entire survey without incorporating a time vector. However, the Commission pointed out in its comment that such method does not take into account the potential of new animals moving into the ensonified area during the course of the survey. NMFS also realized that although such method provides take estimates that closely matched the actual estimated takes provided in the 90-day reports (with corrections to count for animals missed due to avoidance of seismic exposure and missed detection), the potential of not counting new animals moving into the area could underestimate the actual take. Therefore, in response to the Commission's response, NMFS is incorporating a time vector, survey days, into take estimates by multiplying animal density and daily ensonified area and the number of survey days. However, this method provides the number of instances of take without accounting for the fact that some individuals may be taken more than once during the survey. Since the same animal is very likely to be taken multiple times on different days, this method presents a serious issue when analyzing the number of unique animals from a given population that are harassed. To address this issue, NMFS applied a correction factor, the daily turnover rate, to provide take estimates that are more realistic.

#### 1. Daily Ensonified Area

SAE states that regardless the size of the airgun array, the daily survey area is 18.75 mi<sup>2</sup>. However, the daily ensonified areas, which are the daily survey areas in additional to areas that would be ensonified to 160 dB re 1  $\mu$ Pa, would vary with the size of the airgun array used. The specific daily ensonified areas depend on the ensonified radii from different airgun arrays shown in Table 2. For the 620 in<sup>3</sup> airgun array, the daily ensonified area out to the 160 dB re 1  $\mu$ Pa is 43.6 mi<sup>2</sup>, or 113 km<sup>2</sup>. For the 1,240 in<sup>3</sup> airgun array, the daily

ensonified area out the 160 dB re 1  $\mu$ Pa is 117 mi<sup>2</sup>, or 303 km<sup>2</sup>.

Assuming that the survey areas of different bathymetry are proportionally represented by the bathymetry of the entire survey box, then 19% of the survey area will be less than 1.5 m deep, 16% survey area is 1.5–5 m deep, 36% survey area 5–15 m deep, and the remaining 29% survey area is deeper than 15 m. As stated earlier, waters below 5 m deep are not bowhead whale habitat, therefore, bowhead takes are excluded from these waters. In addition, waters below 15 m deep are not bowheads habitat during the fall, therefore, they are also excluded for take calculation for SAE's 3D survey in the fall.

No adjustments were made for beluga whales, and ringed, spotted, and bearded seals, as they could appear in much shallower waters.

#### 2. Number of Survey Days

As discussed in the **Federal Register** notice (80 FR 20084; April 14, 2015) and in this document, within the total of 107 days of this IHA (from July 1 to October 15, 2015), SAE states that survey is anticipated to last 70 days, of which approximately 70% of the time, or a total of 49 days, when the actual seismic survey using airgun arrays will be occurring, depending on weather and ice conditions. Though it cannot be predicted the exact days when incremental weather and ice conditions would present the surveys, for the purpose of this analysis, NMFS prorated survey days in summer (July 1 to August 31) and in fall (September 1 to October 15) with the total days in summer (62 days) and fall (45 days), which yielded 28 survey days in summer and 21 survey days in fall.

#### 3. Turnover Rate of Marine Mammals

For bowhead whales, during the summer period into early fall (August to October), they are often observed feeding from Smith Bay to Point Barrow (Clarke & Ferguson, 2010a, 2010b; Clarke *et al.* 2011a, 2011b, 2012, 2013). In other areas of the western Beaufort Sea (including the SAE's proposed seismic survey area), bowhead whales may feed on the continental shelf, out to approximately the 50-m isobath, in September and October (Clarke *et al.* 2015). In the fall period (September and October), bowhead whales are observed migrating through the western Beaufort Sea primarily on the shelf (including the SAE's proposed seismic survey area), at depths less than 50 m, with some whales migrating across the outer shelf (Clarke *et al.*, 2015).

It is difficult to determine an average turnover time for individual bowhead whales in a particular area of the Beaufort Sea. Reasons for this include differences in residency time between migratory and non-migratory periods, changes in distribution of food and other factors such as behavior that influence animal movement, variation among individuals, etc.

Complete turnover of individual bowhead whales in the project area each 24-hour period is possible during distinct periods within the fall migration when bowheads are traveling through the area, however, bowheads often move in pulses with one to several days between major pulses of whales (Miller *et al.* 2002). Gaps between groups of traveling whales during fall migration result in days when no bowhead whales would be expected to be present in the activity area. The absence of bowhead whales during periods of the fall migration can likely be attributed to individuals stopping to feed opportunistically when food is encountered, which is known to occur annually in an area north of Barrow (Citta *et al.* 2014). The extent of feeding by bowhead whales during fall migration varies greatly from year to year based on the location and abundance of prey (Shelden and Mocklin 2013). For these reasons, NMFS believes a daily 100% turnover period for bowhead whales is unnecessarily conservative and has selected a daily turnover rate of 50% to account for both feeding (where animals stay relatively within an area) and migration (where animals are moving across an area) in both fall and winter.

For beluga whales, two stocks are potentially present in the SAE 3D seismic survey areas: the East Chukchi Sea and Beaufort Sea stocks. Since they cannot be visually distinguished in the field, the proportion of take from each stock in the seismic survey area in Beaufort Sea cannot be determined (Allen and Angliss 2014). Thus it would be difficult to assess the turnover rate of beluga whales because each different stock has its own migratory pattern and time. Therefore, NMFS used the most conservative measure of assuming complete turnover of the animals every 24 hours, making a daily turnover rate of 100% for a more conservative take calculation.

For ringed seals, satellite tagging data from tagging studies from the State of Alaska Department of Fish and Game's Marine Mammals Program, the Ice Seal Committee, and interested seal hunters from villages along the west and north coasts of Alaska were used to derive a turnover rate for this species. Data from

these tagged animals showed that in addition to a long distance seasonal migration, there are many instances from July through September when individual ringed seals stayed in a relatively small area (compared to their migration route) up to multiple weeks, including on and around the offshore continental shelf leased blocks. In addition, Patterson *et al.* (2014) indicate a turnover period of a week or more for individual seals in the vicinity of the seismic survey in the Alaskan Arctic may be more appropriate, based on the 6–24 day area occupancy. These results suggest that assuming a 100% turnover of all individual seals around SAE's seismic survey box on a daily basis is unreasonable, and a period closer to a week may be more appropriate and yet still conservative for other individuals

that remained in the area for longer periods. Therefore, for the purpose of this IHA, NMFS used a slightly higher turnover rate than the weekly rate, *i.e.*, a 48-hour (or 50%) turnover rate, to be more conservative.

Few data are available on the home range and movement patterns of the other two ice seals, the bearded seal and spotted seals. Therefore, we used the most conservative daily turnover rate for take estimates of these species.

#### 4. Use of Different Size of Airgun Arrays

As discussed in the **Federal Register** notice (80 FR 20084; April 14, 2015) for the proposed IHA and early in this document, two types of airgun arrays will be used during SAE's 3D seismic survey in the Beaufort Sea: 620 in<sup>3</sup> and 1,240 in<sup>3</sup> airgun arrays. Upon inquiry

from NMFS regarding the frequency of different airgun arrays being used, SAE expects that approximately 80% of the survey would be done using the 620 in<sup>3</sup> array, with the remaining by the 1,240 in<sup>3</sup> array. Therefore, the take number estimates reflect the combination of takes from each of these two airgun arrays in a 4:1 ratio for the 620 in<sup>3</sup> vs. 1,240 in<sup>3</sup> arrays.

Based on the above described take estimate calculation by multiplying ensonified area by animal density by survey days in specific marine mammal habitat and season, adjusted by turnover rates and different airgun usage, the estimated number of bowhead and beluga whales, and ringed, spotted, and bearded seals can be calculated. A summary of the calculation is provided in Table 4 below.

TABLE 4—SUMMARY OF CALCULATION OF MARINE MAMMAL EXPOSED TO RECEIVED LEVELS HIGHER THAN 160 dB RE 1  $\mu$ Pa FOR SAE'S PROPOSED 3D SEISMIC SURVEY

Species (habitat)	Summer				Fall				All seasons		
	ZOI (km <sup>2</sup> )	Days	Density (km <sup>-1</sup> )	Summer exposure	ZOI (km <sup>2</sup> )	Days	Density (km <sup>-1</sup> )	Fall exposure	Turn-over	Airgun usage	Total adjusted exposure
<b>Airgun array volume: 620 in<sup>3</sup></b>											
Bowhead whale .....	113	.....	.....	344	113	.....	.....	332.2	50	80	271
(0.0–1.5m) .....	21.47	28	0	0	21.47	21	0	0	.....	.....	.....
(1.5–5.0m) .....	18.08	28	0	0	18.08	21	0	0	.....	.....	.....
(5.0–15.0m) .....	40.68	28	0.1674	190.6	40.68	21	0	0	.....	.....	.....
(>15.0m) .....	32.77	28	0.1674	153.6	32.77	21	0.4828	332.2	.....	.....	.....
Beluga whale .....	113	28	0.0020	6.3	113	21	0.0057	13.5	100	80	16
Ringed seal .....	113	28	0.3547	1122.3	113	21	0.2510	595.6	20	80	687
Spotted seal .....	113	28	0.0177	56	113	21	0.0125	29.7	100	80	69
Bearded seal .....	113	28	0.0177	56	113	21	0.0125	29.7	100	80	69
<b>Airgun array volume: 1,240 in<sup>3</sup></b>											
Bowhead whale .....	303	.....	.....	923	303	.....	.....	891	50	20	181
(0.0–1.5m) .....	57.57	28	0	0	57.57	21	0	0	.....	.....	.....
(1.5–5.0m) .....	48.48	28	0	0	48.48	21	0	0	.....	.....	.....
(5.0–15.0m) .....	109.1	28	0.1674	511.2	109.1	21	0	0	.....	.....	.....
(>15.0m) .....	87.87	28	0.1674	411.8	87.87	21	0.4828	890.8	.....	.....	.....
Beluga whale .....	303	28	0.0020	17	303	21	0.0057	36.3	100	20	11
Ringed seal .....	303	28	0.3547	3009.3	303	21	0.2510	1597.1	20	20	461
Spotted seal .....	303	28	0.0177	150.2	303	21	0.0125	79.5	100	20	46
Bearded seal .....	303	28	0.0177	150.2	303	21	0.0125	79.5	100	20	46

The potential takes of spotted seals are adjusted based on observations during SAE's 2014 seismic operations immediately east of the Colville River Delta (Lomac-MacNair *et al.*, 2014). The 90-day report (Lomac-MacNair *et al.*, 2014) reported only 5 confirmed sightings of ringed seals, none of which were observed during active seismic activity. But a total of 40 spotted seals (4 during seismic surveys) and an additional 28 seals (could be either ringed or spotted seals, with 4 during seismic surveys) were observed. Given only 88 km<sup>2</sup> were shot in 2014, this would extrapolate to about 353 spotted seals observed during the planned 777 km<sup>2</sup> of operations planned in 2015. If

80% of the ringed/spotted seal sightings were actually spotted seals, then an additional 200 spotted seals would be observed during the seismic survey. Given the nearshore location of the planned seismic activities and proximity to Colville River Delta spotted seal haulout sites, and likelihood that a number of seals that were exposed to seismic noise exceeding 160 dB were not observed, NMFS corrected the spotted seal takes to 500.

No density data for gray whale is available in the SAE's proposed survey area, because gray whale occurrence in the Beaufort Sea is not frequent, especially in nearshore water where SAE's survey area is. Based on sighting

data, only a few gray whales have been documented in the nearshore Beaufort Sea (Green and Negri, 2005, Green *et al.*, 2007). Therefore, it is estimated up to 2 gray whales could be taken by Level B harassment as a result of SAE's 3D seismic survey during the 2015 open-water season in the Beaufort Sea.

A summary of estimated number of marine mammal potentially exposed to received sound levels greater than 160 dB re 1  $\mu$ Pa is provided in Table 6.

#### Level A Exposure Calculations

As discussed earlier in this section, NMFS considers that exposures to pinnipeds at noise levels above 190 dB and cetaceans at noise levels above 180

dB constitute Level A takes under the MMPA. Although brief exposure of marine mammals at these levels are not likely to cause TTS or PTS (Southall *et al.* 2007), this consideration is a precaution NMFS takes for its effect analysis.

The methods used in estimate Level A exposure is the same for Level B

estimates, *i.e.*, multiplying the total amount of area available to the species that could be seasonally ensonified by noise levels exceeding 190 and 180 dB by density of each species by the number of survey days in each season, then corrected by the animals turnover rates and different airgun array usage. The results of potential Level A

exposure are shown in Table 5, assuming that animals will not avoid being exposed to received levels that could cause hearing threshold shifts or even injury, which is highly unlikely, and that no mitigation and monitoring measures would be implemented to avoid Level A takes.

**TABLE 5—SUMMARY OF CALCULATION OF CETACEANS EXPOSED TO RECEIVED LEVELS HIGHER THAN 180 Db AND PINNIPEDS EXPOSURE TO RECEIVED LEVELS HIGHER THAN 190 dB RE 1  $\mu$ Pa, WITH NO CONSIDERATION OF ANIMALS AVOIDING LEVEL A EXCLUSION ZONE AND NO MONITORING AND MITIGATION MEASURES ARE IN PLACE TO AVOID SUCH EXPOSURES**

Species (habitat)	Summer				Fall				All seasons		
	ZOI (km <sup>2</sup> )	Days	Density (km <sup>-1</sup> )	Summer exposure	ZOI (km <sup>2</sup> )	Days	Density (km <sup>-1</sup> )	Fall exposure	Turn-over (%)	Airgun usage (%)	Total adjusted exposure
<b>Airgun array volume: 620 in<sup>3</sup></b>											
Bowhead whale .....	67.8	.....	.....	206	67.8	.....	.....	199	50%	80%	162
(0.0–1.5m) .....	12.88	28	0	0	12.88	21	0	0	.....	.....	.....
(1.5–5.0m) .....	10.85	28	0	0	10.85	21	0	0	.....	.....	.....
(5.0–15.0m) .....	24.41	28	0.1674	114.4	24.41	21	0	0	.....	.....	.....
(>15.0m) .....	19.66	28	0.1674	92.2	19.66	21	0.4828	199.4	.....	.....	.....
Beluga whale .....	67.8	28	0.0020	3.8	67.8	21	0.0057	8.1	100	80	10
Ringed seal .....	54.2	28	0.3547	538	54.2	21	0.2510	285.5	20	80	329
Spotted seal .....	54.2	28	0.0177	26.8	54.2	21	0.0125	14.2	100	80	33
Bearded seal .....	54.2	28	0.0177	26.8	54.2	21	0.0125	14.2	100	80	33
<b>Airgun array volume: 1,240 in<sup>3</sup></b>											
Bowhead whale .....	78	.....	.....	237	78	.....	.....	229	50%	20%	47
(0.0–1.5m) .....	14.77	28	0	0	14.77	21	0	0	.....	.....	.....
(1.5–5.0m) .....	12.44	28	0	0	12.44	21	0	0	.....	.....	.....
(5.0–15.0m) .....	27.99	28	0.1674	131.1	27.99	21	0	0	.....	.....	.....
(>15.0m) .....	22.54	28	0.1674	105.6	22.54	21	0.4828	228.6	.....	.....	.....
Beluga whale .....	77.74	28	0.0020	4.4	77.74	21	0.0057	9.3	100	20	3
Ringed seal .....	55.84	28	0.3547	554.6	55.84	21	0.2510	294.3	20	20	85
Spotted seal .....	55.84	28	0.0177	27.7	55.84	21	0.0125	14.7	100	20	8
Bearded seal .....	55.84	28	0.0177	27.7	55.84	21	0.0125	14.7	100	20	8

It is important to note that the numbers presented in Table 5 are not the Level A take numbers. These numbers represent an unlikely scenario of exposure incidences if an animal did not avoid the intense noise field that could cause hearing impairment or injury and no monitoring or mitigation measures were implemented to avoid such consequences. Literature (*e.g.*, Richardson *et al.* 1995, 1999; Southall *et al.* 2007) shows that marine mammals often avoid areas with intense noises, especially bowhead whales, even when the received noise levels are way below the levels that could elicit Level B harassment. Although this avoidance of an area by the marine mammals does not preclude the animals being taken by Level B harassment, it lessens the likelihood that they will be exposed above 180 dB for cetaceans and 190 dB for pinnipeds and incur hearing impairment or injury.

Most importantly, monitoring and mitigation measures prescribed in the IHA require SAE to shut down or power down airgun arrays when a marine mammal is detected approaching, therefore, potential Level A harassment can be further avoided. Especially for non-deep diving large cetaceans such as bowhead whales (and to some extent beluga whales), vessel-based visual monitoring is effective to detect the whales before they enter the exclusion zone, as shown in previous 90-day reports from SAE and other open-water seismic survey activities. Nevertheless, in the unlikely case if a marine mammal is not detected by the PSO and did not avoid the 180 or 190 dB established for cetaceans and pinnipeds, respectively, a Level A take could occur. To derive more realistic Level A take estimates and in discussion with the Commission, NMFS consulted with the ESA biologists at NMFS Alaska Region. In

addition, NMFS reviewed the monitoring results from SAE's 90-day report of its 2014 3D seismic survey in the same area with similar airgun arrays and vessel types, and also reviewed monitoring results from other monitoring reports in nearby waters in Beaufort Sea using similar sizes of airgun arrays (*e.g.*, BP's 2012 Simpson Lagoon 3D seismic survey and BP's 2014 North Prudhoe Bay 3D seismic survey). Based on the review of these monitoring plans (including consideration of missed detections), the likely effectiveness of the mitigation and the likely avoidance of high levels of sound, NMFS modified the authorized Level A take as follows: 1 bowhead whale, 4 beluga whale, 20 ringed seals, 20 spotted seals, and 10 bearded seals.

A summary of authorized Level A and Level B harassments for SAE's 3D seismic surveys in the Colville Delta of the Beaufort Sea is provided in Table 6.

TABLE 6—THE AUTHORIZED LEVEL A AND LEVEL B HARASSMENTS OF MARINE MAMMALS FOR SAE'S 2015 OPEN-WATER 3D SEISMIC SURVEY IN THE BEAUFORT SEA

Species	Stock abundance	Authorized Level B harassment	Authorized Level A harassment	% of take by stock
Bowhead whale .....	19,534	452	1	2.31
Beluga whale (Beaufort Sea stock) .....	39,258	27	4	0.07
Beluga whale (E. Chukchi Sea stock) .....	3,710	27	4	0.73
Gray whale .....	19,126	2	0	0.01
Ringed seal .....	300,000	1,148	20	0.39
Spotted seal .....	141,479	500	20	0.35
Bearded seal .....	155,000	115	10	0.07

The estimated Level A and Level B takes as a percentage of the marine mammal stock are 2.31% or less in all cases (Table 6). The highest percent of population estimated to be taken is 0.005% for Level A and 2.31% for Level B harassments for bowhead whale. For beluga whales, since there are two stocks in the proposed action, the percentage of the takes represent the worst case scenario when all takes occur in Beaufort Sea stock (0.07%) or East Chukchi Sea stock (0.73%). However, most likely the percentage of takes for each stock would not be this worst case scenario.

#### Analysis and Determinations

##### Negligible Impact

Negligible impact is “an impact resulting from the specified activity that cannot be reasonably expected to, and is not reasonably likely to, adversely affect the species or stock through effects on annual rates of recruitment or survival” (50 CFR 216.103). A negligible impact finding is based on the lack of likely adverse effects on annual rates of recruitment or survival (*i.e.*, population-level effects). An estimate of the number of Level B harassment takes, alone, is not enough information on which to base an impact determination. In addition to considering estimates of the number of marine mammals that might be “taken” through behavioral harassment, NMFS must consider other factors, such as the likely nature of any responses (their intensity, duration, etc.), the context of any responses (critical reproductive time or location, migration, etc.), as well as the number and nature of estimated Level A harassment takes, the number of estimated mortalities, effects on habitat, and the status of the species.

To avoid repetition, this introductory discussion of our analyses applies to all the species listed in Table 6, given that the anticipated effects of SAE's 3D seismic survey project on marine mammals are expected to be relatively similar in nature. Where there are

meaningful differences between species or stocks, or groups of species, in anticipated individual responses to activities, impact of expected take on the population due to differences in population status, or impacts on habitat, they are described independently in the analysis below.

No serious injuries or mortalities are anticipated to occur as a result of SAE's proposed 3D seismic survey, and none are proposed to be authorized. The takes that are anticipated and authorized are expected to be limited to short-term Level B behavioral harassment, and Level A harassment in the form of permanent hearing threshold shifts. While the airguns are expected to be operated for approximately 49 days within a 70-day period, the project timeframe will occur when cetacean species are typically not found in the project area or are found only in low numbers. While pinnipeds are likely to be found in the proposed project area more frequently, their distribution is dispersed enough that they likely will not be in the Level A or Level B harassment zone continuously. As mentioned previously in this document, pinnipeds appear to be more tolerant of anthropogenic sound than mysticetes.

##### Bowhead Whales

The bowhead whale is listed as endangered species under the ESA and depleted under the MMPA. However, despite these designations, the Bering-Chukchi-Beaufort stock of bowheads has been increasing at a rate of 3.4% annually for nearly a decade (Allen and Angliss, 2011), even in the face of ongoing industrial activity. Additionally, during the 2001 census, 121 calves were counted, which was the highest yet recorded. The calf count provides corroborating evidence for a healthy and increasing population (Allen and Angliss, 2011).

Most of the bowhead whales encountered will likely show overt disturbance (avoidance) only if they receive airgun sounds with levels  $\geq 160$

dB re 1  $\mu$ Pa. In addition, elevated background noise level from the seismic airgun reverberant field could cause acoustic masking to bowhead whales and reduce their communication space. However, even though the decay of the signal is extended, the fact that pulses are separated by approximately 8 to 10 seconds for each individual source vessel (or 4 to 5 seconds when taking into account the two separate source vessels stationed 300 to 335 m apart) means that overall received levels at distance are expected to be much lower, thus resulting in less acoustic masking.

Bowhead whales are less likely to occur in the proposed project area in July and early August, as they are found mostly in the Canadian Beaufort Sea at this time. The animals are more likely to occur later in the season (late-August through October), as they head west towards Chukchi Sea.

It is estimated that a maximum of 452 bowhead whales (2.31%) could be taken by Level B harassment. Potential impacts to bowhead whales from SAE's 3D seismic surveys would be limited to brief behavioral disturbances and temporary avoidance of the ensonified areas.

In their westward migration route, bowhead whales have been observed to feed in the vicinity of the survey area in the Beaufort Sea. Most of the feedings are observed in the September to October period as more bowhead whales are moving through the migratory corridor in the Beaufort Sea. Therefore, the areas in offshore Beaufort Sea are considered as biologically important areas for bowhead whales in September and October (Clarke *et al.* 2015). However, their habitat is in relatively deeper water > 15 m, which accounts for only 29% of SAE's proposed seismic survey area.

The proposed activity also partially overlaps with BIAs where bowhead whale mother/calf pairs are sighted in the summer and fall and BIAs of bowhead whale fall migration (Clarke *et al.*, 2015). However, as discussed



previously, the majority of the survey areas (71%) are in shallow waters < 15 m, and are not considered bowhead habitat in the fall. In the summer, bowhead whale habitat extends to much shallower area of < 5 m, which counts for about 65% of the proposed 3D seismic survey areas.

Due to the relatively small airgun arrays to be used in the SAE's 3D seismic survey, noise exposure to bowhead whales is expected to be low and would in almost all cases cause Level B harassment in the form of mild and temporary behavioral modification and/or avoidance. Moreover, the majority of the ensonified areas (67%) would fall between 160 and 166 dB re 1  $\mu$ Pa for impulse noise, which at the low-end of the range for Level B behavioral harassment by noise exposure.

It is estimated that up to 1 bowhead whale could be exposed to received noise levels above 180 dB re 1  $\mu$ Pa (rms) for durations long enough to cause PTS, if the animal does not avoid the area for some reason and is not detected in time to have mitigation measures implemented. Marine mammals that are taken by TTS (which is a form of Level B harassment) are expected to receive minor (in the order of several dBs) and brief (minutes to hours) temporary hearing impairment because (1) animals are not likely to remain for prolonged periods within high intensity sound fields, and (2) both the seismic vessel and the animals are constantly moving, and it is unlikely that the animal will be moving along with the vessel during the survey. Although repeated experience to TTS (Level B harassment) could result in PTS (Level A harassment), for the same reasons discussed above, even if marine mammals experience PTS, the degree of PTS is expected to be mild, resulting in a few dB elevation of hearing threshold, and are not expected to be biologically significant for the population or species.

#### *Beluga Whale*

Odontocete reactions to seismic airgun pulses are generally assumed to be limited to shorter distances from the airgun than are those of mysticetes (e.g., bowhead whales), in part because odontocete low-frequency hearing is assumed to be less sensitive than that of mysticetes. However, at least when in the Canadian Beaufort Sea in summer, belugas appear to be fairly responsive to seismic energy, with few being sighted within 6–12 mi (10–20 km) of seismic vessels during aerial surveys (Miller *et al.* 2005). Belugas will likely occur in small numbers in the Beaufort Sea

during the survey period and few will likely be affected by the survey activity.

Beluga whales are less likely to occur in the proposed project area in July and early August, as they are found mostly in the Canadian Beaufort Sea at this time. The animals are more likely to occur later in the season (late-August through October), as they head west towards Chukchi Sea. However, most beluga whales are expected to occur in much deeper water offshore in the Beaufort Sea during its migration. The beluga whale fall migration BIAs are approximately 75 km offshore from the SAE's proposed seismic survey area (Clarke *et al.*, 2015). No other beluga whale BIAs overlap with SAE's proposed survey area.

It is estimated that a maximum of 27 beluga whales (0.07% from the Beaufort Sea stock if all animals taken are from the Beaufort Sea stock, or 0.73% from the East Chukchi Sea stock if all animals taken are from the East Chukchi Sea stock) could be taken by Level B harassment. Potential impacts to beluga whales from SAE's 3D seismic survey activity include brief behavioral disturbances and temporary avoidance of the ensonified areas.

It is estimated that up to 4 beluga whales could be exposed to received noise levels above 180 dB re 1  $\mu$ Pa (rms) for durations long enough to cause PTS, if the animals do not avoid area for some reason and are not detected in time to have mitigation measures implemented. Marine mammals that are taken by TTS (which is a form of Level B harassment) are expected to receive minor (in the order of several dBs) and brief (minutes to hours) temporary hearing impairment because (1) animals are not likely to remain for prolonged periods within high intensity sound fields, and (2) both the seismic vessel and the animals are constantly moving, and it is unlikely that the animal will be moving along with the vessel during the survey. Although repeated experience to TTS (Level B harassment) could result in PTS (Level A harassment), for the same reasons discussed above, even if marine mammals experience PTS, the degree of PTS is expected to be mild, resulting in a few dB elevation of hearing threshold, and are not expected to be biologically significant for the population or species.

#### *Gray Whales*

Gray whales are not commonly encountered in the Beaufort Sea coast, though occasional sightings have occurred in the past. It is estimated that a maximum of 2 gray whales (0.01%) could be taken by Level B harassment. Potential impacts to gray whales from

SAE's 3D seismic survey will be limited to brief behavioral disturbances and temporary avoidance of the ensonified areas. No Level A takes of gray whale is expected, and none is authorized.

No BIA for gray whales overlaps with SAE's 3D seismic survey in the Beaufort Sea (the gray whale reproduction and feeding BIAs during the summer and fall are in the Chukchi Sea (Clarke *et al.* 2015)).

#### *Pinnipeds*

Ringed, spotted, and bearded are regularly encountered in the proposed SAE's seismic survey area, with the first two species being most common. Ringed seals were recently listed under the ESA as threatened species, and are considered depleted under the MMPA. On July 25, 2014, the U.S. District Court for the District of Alaska vacated NMFS' rule listing the Beringia bearded seal DPS as threatened and remanded the rule to NMFS to correct the deficiencies identified in the opinion.

As stated in the **Federal Register** notice (80 FR 20084; April 14, 2015) for the proposed IHA, they appear to be more tolerant of anthropogenic sound, especially at lower received levels, than other marine mammals, such as mysticetes. SAE's proposed activities would occur at a time of year when these seal species found in the region are not molting, breeding, or pupping. Therefore, these important life functions would not be impacted by SAE's proposed activities. The exposure of pinnipeds to sounds produced by SAE's proposed 3D seismic survey operations in the Beaufort Sea is not expected to result in more than Level B harassment of individuals from pinnipeds in most cases, with a few by Level A harassment in the form of TTS (Level B harassment) and PTS (Level A harassment).

It is estimated that maxima of 459 ringed seals (0.15%), 500 spotted seals (0.35%), and 115 bearded seals (0.07%) could be taken by Level B harassment. Level B behavioral harassment to these species from SAE's 3D seismic survey activity include brief behavioral disturbances and temporary avoidance of the ensonified areas.

In addition, it is estimated that up to 20 ringed and spotted seals and 10 bearded seals could be exposed to received noise levels above 190 dB re 1  $\mu$ Pa (rms) for durations long enough to cause TTS, if the animals do not avoid area for some reason and are not detected in time to have mitigation measures implemented (or even PTS if such exposures occurred repeatedly). Marine mammals that are taken by TTS are expected to receive minor (in the order of several dBs) and brief (minutes



to hours) temporary hearing impairment because (1) animals are not likely to remain for prolonged periods within high intensity sound fields, and (2) both the seismic vessel and the animals are constantly moving, and it is unlikely that the animal will be moving along with the vessel during the survey. Although repeated experience to TTS could result in PTS (Level A harassment), for the same reasons discussed above, even if marine mammals experience PTS, the degree of PTS is expected to be mild, resulting in a few dB elevation of hearing threshold. Therefore, even if a few marine mammals receive TTS or PTS, the degree of these effects are expected to be minor and, in the case of TTS, brief, and are not expected to be biologically significant for the population or species.

No biologically important area exists for seals in the vicinity of SAE's 3D seismic survey activities.

Taking into account the mitigation measures that are planned, effects on marine mammals are generally expected to be restricted to avoidance of a limited area around SAE's proposed open-water activities and short-term changes in behavior, falling within the MMPA definition of "Level B harassments." The many reported cases of apparent tolerance by marine mammals to seismic exploration, vessel traffic, and some other human activities show that co-existence is possible. Mitigation measures, such as controlled vessel speed, dedicated marine mammal observers, non-pursuit, ramp up procedures, and shut downs or power downs when marine mammals are seen within defined ranges, will further reduce short-term reactions and minimize any effects on hearing sensitivity. In all cases, the effects are expected to be short-term, with no lasting biological consequence.

Potential impacts to marine mammal habitat were discussed previously in the **Federal Register** notice (80 FR 20084; April 14, 2015) for the proposed IHA (see the "Anticipated Effects on Habitat" section of that document). Although some disturbance of food sources of marine mammals is possible, any impacts are anticipated to be minor enough as to not affect rates of recruitment or survival of marine mammals in the area. The marine survey activities would occur in a localized area, and given the vast area of the Arctic Ocean where feeding by marine mammals occurs, any missed feeding opportunities in the direct project area could be offset by feeding opportunities in other available feeding areas.

In addition, no critical habitat of ESA-listed marine mammal species occurs in the Beaufort Sea.

Based on the analysis contained herein of the likely effects of the specified activity on marine mammals and their habitat, and taking into consideration the implementation of the proposed monitoring and mitigation measures, NMFS finds that the total marine mammal take from SAE's proposed 3D seismic survey in the Beaufort Sea, Alaska, will have a negligible impact on the affected marine mammal species or stocks.

#### *Small Numbers*

The requested takes proposed to be authorized represent less than 2.31% for all populations or stocks potentially impacted (see Table 6 in this document). These take estimates represent the maximum percentage of each species or stock that could be taken by Level B behavioral harassment and Level A harassment if each animal is taken only once, and each take represents a different individual animal. However, it is likely that many, if not most, individual animals could be taken multiple times due to their short term movement pattern and home range. Therefore, the percentages of takes of marine mammals among their populations are likely to be much lower. The numbers of marine mammals estimated to be taken are small proportions of the total populations of the affected species or stocks. In addition, the mitigation and monitoring measures (described previously in this document) prescribed in the IHA are expected to reduce even further any potential disturbance and injuries to marine mammals.

Based on the analysis contained herein of the likely effects of the specified activity on marine mammals and their habitat, and taking into consideration the implementation of the mitigation and monitoring measures, NMFS finds that small numbers of marine mammals will be taken relative to the populations of the affected species or stocks.

#### **Impact on Availability of Affected Species or Stock for Taking for Subsistence Uses**

##### *Relevant Subsistence Uses*

The proposed seismic activities will occur within the marine subsistence area used by the village of Nuiqsut. Nuiqsut was established in 1973 at a traditional location on the Colville River providing equal access to upland (e.g., caribou, Dall sheep) and marine (e.g., whales, seals, and eiders) resources

(Brown 1979). Although Nuiqsut is located 40 km (25 mi) inland, bowhead whales are still a major fall subsistence resource. Although bowhead whales have been harvested in the past all along the barrier islands, Cross Island is the site currently used as the fall whaling base, as it includes cabins and equipment for butchering whales. However, whalers must travel about 160 km (100 mi) to annually reach the Cross Island whaling camp, which is located in a direct line over 110 km (70 mi) from Nuiqsut. Whaling activity usually begins in late August with the arrival of whales migrating from the Canadian Beaufort Sea, and may occur as late as early October, depending on ice conditions and quota fulfillment. Most whaling occurs relatively near (<16 km or <10 mi) the island, largely to prevent meat spoilage that can occur with a longer tow back to Cross Island. Since 1993, Cross Island hunters have harvested one to four whales annually, averaging three.

Cross Island is located 70 km (44 mi) east of the eastern boundary of the seismic survey box. (Point Barrow is over 180 km [110 mi] outside the potential survey box.) Seismic activities are unlikely to affect Barrow or Cross Island based whaling, especially if the seismic operations temporarily cease during the fall bowhead whale hunt.

Although Nuiqsut whalers may incidentally harvest beluga whales while hunting bowheads, these whales are rarely seen and are not actively pursued. Any harvest that would occur would most likely be in association with Cross Island.

The potential seismic survey area is also used by Nuiqsut villagers for hunting seals. All three seal species that are likely to be taken—ringed, spotted, and bearded—are hunted. Sealing begins in April and May when villagers hunt seals at breathing holes in Harrison Bay. In early June, hunting is concentrated at the mouth of the Colville River, where ice breakup flooding results in the ice thinning and seals becoming more visible.

Once the ice is clear of the Delta (late June), hunters will hunt in open boats along the ice edge from Harrison Bay to Thetis Island in a route called "round the world." Thetis Island is important as it provides a weather refuge and a base for hunting bearded seals. During July and August, ringed and spotted seals are hunted in the lower 65 km (40 mi) of the Colville River proper.

In terms of pounds, approximately one-third of the village of Nuiqsut's annual subsistence harvest is marine mammals (fish and caribou dominate the rest), of which bowhead whales

contribute by far the most (Fuller and George 1999). Seals contribute only 2 to 3% of annual subsistence harvest (Brower and Opie 1997, Brower and Hepa 1998, Fuller and George 1999). Fuller and George (1999) estimated that 46 seals were harvested in 1992. The more common ringed seals appear to dominate the harvest, although the larger and thicker-skinned bearded seals are probably preferred. Spotted seals occur in the Colville River Delta in small numbers, which is reflected in the harvest.

Available harvest records suggest that most seal harvest occurs in the months preceding the proposed August start of the seismic survey, when waning ice conditions provide the best opportunity to approach and kill hauled out seals. Much of the late summer seal harvest occurs in the Colville River as the seals follow fish runs upstream. Still, open-water seal hunting could occur coincident with the seismic surveys, especially bearded seal hunts based from Thetis Island. In general, however, given the relatively low contribution of seals to the Nuiqsut subsistence, and the greater opportunity to hunt seals earlier in the season, any potential impact by the seismic survey on seal hunting is likely remote.

#### *Potential Impacts to Subsistence Uses*

NMFS has defined "unmitigable adverse impact" in 50 CFR 216.103 as: "an impact resulting from the specified activity: (1) That is likely to reduce the availability of the species to a level insufficient for a harvest to meet subsistence needs by: (i) Causing the marine mammals to abandon or avoid hunting areas; (ii) Directly displacing subsistence users; or (iii) Placing physical barriers between the marine mammals and the subsistence hunters; and (2) That cannot be sufficiently mitigated by other measures to increase the availability of marine mammals to allow subsistence needs to be met.

Noise and general activity during SAE's proposed 3D OBN seismic survey have the potential to impact marine mammals hunted by Native Alaskans. In the case of cetaceans, the most common reaction to anthropogenic sounds (as noted previously) is avoidance of the ensonified area. In the case of bowhead whales, this often means that the animals divert from their normal migratory path by several kilometers. Additionally, general vessel presence in the vicinity of traditional hunting areas could negatively impact a hunt. Native knowledge indicates that bowhead whales become increasingly "skittish" in the presence of seismic noise. Whales are more wary around the hunters and

tend to expose a much smaller portion of their back when surfacing, which makes harvesting more difficult. Additionally, natives report that bowheads exhibit angry behaviors, such as tail-slapping, in the presence of seismic activity, which translate to danger for nearby subsistence harvesters.

Responses of seals to seismic airguns are expected to be negligible. Bain and Williams (2006) studied the responses of harbor seals, California sea lions, and Steller sea lions to seismic airguns and found that seals at exposure levels above 170 dB re 1  $\mu$ Pa (peak-peak) often showed avoidance behavior, including generally staying at the surface and keeping their heads out of the water, but that the responses were not overt, and there were no detectable responses at low exposure levels.

#### *Plan of Cooperation or Measures To Minimize Impacts to Subsistence Hunts*

Regulations at 50 CFR 216.104(a)(12) require IHA applicants for activities that take place in Arctic waters to provide a Plan of Cooperation (POC) or information that identifies what measures have been taken and/or will be taken to minimize adverse effects on the availability of marine mammals for subsistence purposes.

SAE has prepared a POC, which was developed by identifying and evaluating any potential effects the proposed seismic survey might have on seasonal abundance that is relied upon for subsistence use. For the proposed project, SAE worked closely with the North Slope Borough (NSB) and its partner Kuukpik Corporation, to identify subsistence communities and activities that may take place within or near the project area.

As a joint venture partner with Kuukpik, SAE is working closely with them and the communities on the North Slope to plan operations that will include measures that are environmentally suitable and that do not impact local subsistence use. In addition, SAE signed a Conflict Avoidance Agreement (CAA) with the AEWC and other subsistence whaling communities.

SAE adopted a three-stage process to develop its POC:

*Stage 1:* To open communications SAE attended and presented the program description to the Alaska Eskimo Whaling Commission (AEWC) during their mini-convention in December, 2014, in Anchorage. Collaboration meetings were held in March and April 2015 with Kuukpik Corporation leaders. Kuukpik Corporation is SAE's joint venture

partners in the project and on the North Slope of Alaska.

Prior to offshore activities, SAE met and consulted with nearby communities, the North Slope Borough (NSB) planning department and the Fish and Wildlife division. SAE has also presented its project during a community meeting in the village of Nuiqsut, to discuss the planned activities. The discussions included SAE's project description, the POC, resolution of potential conflicts, and proposed operational window. These meetings helped to identify any subsistence conflicts. The following meetings were conducted:

- Nuiqsut: November, 2014 (Job Fair)
- Nuiqsut: January, 2015 (Project Presentation)
- AEWC: December, 2014 (2015 planned projects)
- Barrow (NSB): March, 2015 (Pre Application Meeting)
- Barrow: March, 2015 (Planning Commission Meeting)
- AEWC: February, 2015 (Project Presentation)

In addition, SAE scheduled the following meeting in the near future:

- Nuiqsut: July, 2015 (update Meeting)
- KSOP: July 2015 (Presentation)

*Stage 2:* SAE incorporated meaningful requests to mitigate concerns into operations, including signing a CAA and providing weekly updates to the Kuukpikmiut Subsistence Oversight Panel (KSOP). SAE plans to have a review of permit stipulations and a permit matrix developed for the crews. The means of communications and contacts list have been developed and implemented into operations. Communications will be handled within the CAA and directly with Nuiqsut Whalers. The use of scientific and Inupiat PSOs/Communicators on board the vessels will ensure that appropriate precautions are taken to avoid harassment of marine mammals, including whales, seals, walrus or polar bears. SAE will coordinate the timing and location of operations with the Com-Centers in Deadhorse and Kaktovik to minimize impact to the subsistence activities or the Nuiqsut/Kaktovik Bowhead Whale Hunt.

*Stage 3:* If a conflict does occur with project activities and subsistence hunting, the SAs will immediately contact the project manager and the Com Center. If avoidance is not possible, the project manager will initiate communication with a representative from the impacted subsistence hunter group(s) to resolve the issue and to plan an alternative course of action (which may include

ceasing operations during the whale hunt).

In addition, the following mitigation measures will be imposed in order to effect the least practicable adverse impact on the availability of marine mammal species for subsistence uses:

(i) Establishment and operations of Communication and Call Centers (Com-Center) Program

- For the purposes of reducing or eliminating conflicts between subsistence whaling activities and SAE's survey program, SAE will participate with other operators in the Com-Center Program. Com-Centers will be operated to facilitate communication of information between SAE and subsistence whalers. The Com-Centers will be operated 24 hours/day during the 2015 fall subsistence bowhead whale hunt.

- All vessels shall report to the appropriate Com-Center at least once every six hours, commencing each day with a call at approximately 06:00 hours.

- The appropriate Com-Center shall be notified if there is any significant change in plans, such as an unannounced start-up of operations or significant deviations from announced course, and that Com-Center shall notify all whalers of such changes. The appropriate Com-Center also shall be called regarding any unsafe or unanticipated ice conditions.

(ii) SAE shall monitor the positions of all of its vessels and exercise due care in avoiding any areas where subsistence activity is active.

(iii) Routing barge and transit vessels:

- Vessels transiting in the Beaufort Sea east of Bullen Point to the Canadian border shall remain at least 5 miles offshore during transit along the coast, provided ice and sea conditions allow. During transit in the Chukchi Sea, vessels shall remain as far offshore as weather and ice conditions allow, and at all times at least 5 miles offshore.

- From August 31 to October 31, vessels in the Chukchi Sea or Beaufort Sea shall remain at least 20 miles offshore of the coast of Alaska from Icy Cape in the Chukchi Sea to Pitt Point on the east side of Smith Bay in the Beaufort Sea, unless ice conditions or an emergency that threatens the safety of the vessel or crew prevents compliance with this requirement. This condition shall not apply to vessels actively engaged in transit to or from a coastal community to conduct crew changes or logistical support operations.

- Vessels shall be operated at speeds necessary to ensure no physical contact with whales occurs, and to make any other potential conflicts with bowheads

or whalers unlikely. Vessel speeds shall be less than 10 knots in the proximity of feeding whales or whale aggregations.

- If any vessel inadvertently approaches within 1.6 kilometers (1 mile) of observed bowhead whales, except when providing emergency assistance to whalers or in other emergency situations, the vessel operator will take reasonable precautions to avoid potential interaction with the bowhead whales by taking one or more of the following actions, as appropriate:

- Reducing vessel speed to less than 5 knots within 900 feet of the whale(s);

- Steering around the whale(s) if possible;

- Operating the vessel(s) in such a way as to avoid separating members of a group of whales from other members of the group;

- Operating the vessel(s) to avoid causing a whale to make multiple changes in direction; and

- Checking the waters immediately adjacent to the vessel(s) to ensure that no whales will be injured when the propellers are engaged.

(iv) Limitation on seismic surveys in the Beaufort Sea

- Kaktovik: No seismic survey from the Canadian Border to the Canning River from around August 25 to close of the fall bowhead whale hunt in Kaktovik and Nuiqsut, based on the actual hunt dates. From around August 10 to August 25, based on the actual hunt dates, SAE will communicate and collaborate with the Alaska Eskimo Whaling Commission (AEWC) on any planned vessel movement in and around Kaktovik and Cross Island to avoid impacts to whale hunting.

- Nuiqsut:

- Pt. Storkerson to Thetis Island: No seismic survey prior to July 25 inside the Barrier Islands. No seismic survey from around August 25 to close of fall bowhead whale hunting outside the Barrier Island in Nuiqsut, based on the actual hunt dates.

- Canning River to Pt. Storkerson: No seismic survey from around August 25 to the close of bowhead whale subsistence hunting in Nuiqsut, based on the actual hunt dates.

- Barrow: No seismic survey from Pitt Point on the east side of Smith Bay to a location about half way between Barrow and Peard Bay from September 15 to the close of the fall bowhead whale hunt in Barrow.

(v) SAE shall complete operations in time to allow such vessels to complete transit through the Bering Strait to a point south of 59 degrees North latitude no later than November 15, 2015. Any vessel that encounters weather or ice

that will prevent compliance with this date shall coordinate its transit through the Bering Strait to a point south of 59 degrees North latitude with the appropriate Com-Centers. SAE vessels shall, weather and ice permitting, transit east of St. Lawrence Island and no closer than 10 miles from the shore of St. Lawrence Island.

#### *Unmitigable Adverse Impact Analysis and Preliminary Determination*

SAE has adopted a spatial and temporal strategy for its 3D OBN seismic survey that should minimize impacts to subsistence hunters and ensure the sufficient availability of species for hunters to meet subsistence needs. SAE will temporarily cease seismic activities during the fall bowhead whale hunt, which will allow the hunt to occur without any adverse impact from SAE's activities. Although some seal hunting co-occurs temporally with SAE's proposed seismic survey, the locations do not overlap, so SAE's activities will not impact the hunting areas and will not directly displace sealers or place physical barriers between the sealers and the seals. In addition, SAE is conducting the seismic surveys in a joint partnership agreement with Kuukpik Corporation, which allows SAE to work closely with the native communities on the North Slope to plan operations that include measures that are environmentally suitable and that do not impact local subsistence use, and to adjust the operations, if necessary, to minimize any potential impacts that might arise. Based on the description of the specified activity, the measures described to minimize adverse effects on the availability of marine mammals for subsistence purposes, and the proposed mitigation and monitoring measures, NMFS has determined that there will not be an unmitigable adverse impact on subsistence uses from SAE's proposed activities.

#### **Endangered Species Act (ESA)**

Within the project area, the bowhead whale is listed as endangered and the ringed seal is listed as threatened under the ESA. NMFS' Permits and Conservation Division initiated consultation with staff in NMFS' Alaska Region Protected Resources Division under section 7 of the ESA on the issuance of an IHA to SAE under section 101(a)(5)(D) of the MMPA for this activity. In June 2015, NMFS issued a Biological Opinion, and concluded that the issuance of the IHA associated with SAE's 2015 3D seismic survey in the Beaufort Sea is not likely to jeopardize the continued existence of the endangered bowhead, humpback and

the threatened Arctic sub-species of ringed seal. No critical habitat has been designated for these species, therefore none will be affected.

### National Environmental Policy Act (NEPA)

NMFS prepared an EA that includes an analysis of potential environmental effects associated with NMFS' issuance of an IHA to SAE to take marine mammals incidental to conducting a 3D seismic survey in the Beaufort Sea, Alaska. NMFS has finalized the EA and prepared a Finding of No Significant Impact for this action. Therefore, preparation of an Environmental Impact Statement is not necessary. NMFS' draft EA was available to the public for a 30-day comment period before it was finalized.

### Authorization

As a result of these determinations, NMFS has issued an IHA to SAE for the take of marine mammals, by Level B and Level A harassments, incidental to conducting a 3D OBN seismic survey in the Beaufort Sea during the 2015 open-water season, provided the previously mentioned mitigation, monitoring, and reporting requirements are incorporated.

Dated: July 6, 2015.

**Perry Gayaldo,**

*Deputy Director, Office of Protected Resources, National Marine Fisheries Service.*

[FR Doc. 2015-16966 Filed 7-10-15; 8:45 am]

**BILLING CODE 3510-22-P**

## DEPARTMENT OF COMMERCE

### Patent and Trademark Office

#### Submission for OMB Review; Comment Request; "Post Patent Public Submissions"

The Department of Commerce will submit to the Office of Management and Budget (OMB) for clearance the following proposal for collection of information under the provisions of the Paperwork Reduction Act (44 U.S.C. chapter 35).

*Agency:* United States Patent and Trademark Office, Commerce.

*Title:* Post Patent Public Submissions.

*OMB Control Number:* 0651-0067.

*Form Number(s):*

- PTO/SB/42.

*Type of Request:* Regular.

*Number of Respondents:* 240.

*Average Time per Response:* 10 hours.

*Burden Hours:* 2,400.

*Cost Burden:* \$57.50.

*Needs and Uses:* The United States Patent and Trademark Office (USPTO) is required by 35 U.S.C. 131 *et seq.* to

examine an application for patent and, when appropriate, issue a patent. The provisions of 35 U.S.C. 301 and 37 CFR 1.501 govern the ability of a person to submit into the file of an issued patent (i) prior art consisting of patents or printed publications which the person making the submission believes to have a bearing on the patentability of any claim of the patent, and (ii) statements of the patent owner filed by the patent owner in a proceeding before a Federal court or the USPTO in which the patent owner took a position on the scope of any claim of the patent.

*Affected Public:* Individuals and households; businesses or other for-profits; not-for-profit institutions.

*Frequency:* On occasion.

*Respondent's Obligation:* Required to obtain or retain benefits.

*OMB Desk Officer:* Nicholas A. Fraser, email: [Nicholas\\_A\\_Fraser@omb.eop.gov](mailto:Nicholas_A_Fraser@omb.eop.gov).

Once submitted, the request will be publicly available in electronic format through [reginfo.gov](http://reginfo.gov). Follow the instructions to view Department of Commerce collections currently under review by OMB.

Further information can be obtained by:

- Email: [InformationCollection@uspto.gov](mailto:InformationCollection@uspto.gov). Include "0651-0067 copy request" in the subject line of the message.
- Mail: Marcie Lovett, Records Management Division Director, Office of the Chief Information Officer, United States Patent and Trademark Office, P.O. Box 1450, Alexandria, VA 22313-1450.

Written comments and recommendations for the proposed information collection should be sent on or before August 12, 2015 to Nicholas A. Fraser, OMB Desk Officer, via email to [Nicholas\\_A\\_Fraser@omb.eop.gov](mailto:Nicholas_A_Fraser@omb.eop.gov), or by fax to 202-395-5167, marked to the attention of Nicholas A. Fraser.

Dated: July 1, 2015.

**Marcie Lovett,**

*Records Management Division Director, USPTO, Office of the Chief Information Officer.*

[FR Doc. 2015-17056 Filed 7-10-15; 8:45 am]

**BILLING CODE 3510-16-P**

## DEPARTMENT OF DEFENSE

### Office of the Secretary

[Docket ID DoD-2015-OS-0068]

#### Privacy Act of 1974; System of Records

**AGENCY:** National Guard Bureau, DoD.

**ACTION:** Notice to add a new System of Records.

**SUMMARY:** The National Guard Bureau proposes to add a new system of records INGB 004, entitled "Joint Services Support System (JSS)." JSS will be a centralized, web-based portal that manages, for the Yellow Ribbon Reintegration Program (YRRP), the entire event life cycle—to include, planning, conducting and reporting, for events held nationwide, for Service members and their families. In addition to YRRP, JSS also aims to support program management activities/events for other currently participating programs, such as the Family Program, Employer Support Program, Financial Management Awareness Program, Sexual Assault Response and Prevention Program, Psychological Health Program and Warrior Support program, as well as future Guard and Reserve programs supporting the National Guard Bureau (NGB), Manpower and Personnel Directorate. JSS will also support the collection and storage of Civilian Employer Information (CE) from Service members to fulfill the Uniformed Services Employment and Reemployment Rights Act (USERRA) mandate.

**DATES:** Comments will be accepted on or before August 12, 2015. This proposed action will be effective the day following the end of the comment period unless comments are received which result in a contrary determination.

**ADDRESSES:** You may submit comments, identified by docket number and title, by any of the following methods:

\* *Federal Rulemaking Portal:* <http://www.regulations.gov>. Follow the instructions for submitting comments.

\* *Mail:* Department of Defense, Office of the Deputy Chief Management Officer, Directorate of Oversight and Compliance, Regulatory and Audit Matters Office, 9010 Defense Pentagon, Washington, DC 20301-9010.

*Instructions:* All submissions received must include the agency name and docket number for this **Federal Register** document. The general policy for comments and other submissions from members of the public is to make these submissions available for public viewing on the Internet at <http://www.regulations.gov> as they are received without change, including any personal identifiers or contact information.

**FOR FURTHER INFORMATION CONTACT:** Ms. Jennifer Nikolaisen, 111 South George Mason Drive, AH2, Arlington, VA

22204–1373 or telephone: (703) 601–6884.

**SUPPLEMENTARY INFORMATION:** The National Guard Bureau notices for systems of records subject to the Privacy Act of 1974 (5 U.S.C. 552a), as amended, have been published in the **Federal Register** and are available from the address in **FOR FURTHER INFORMATION CONTACT** or from the Defense Privacy and Civil Liberties Division Web site at <http://dpcl.d.defense.gov/>.

The proposed system report, as required by 5 U.S.C. 552a(r) of the Privacy Act of 1974, as amended, was submitted on May 15, 2015, to the House Committee on Oversight and Government Reform, the Senate Committee on Governmental Affairs, and the Office of Management and Budget (OMB) pursuant to paragraph 4c of Appendix I to OMB Circular No. A–130, “Federal Agency Responsibilities for Maintaining Records About Individuals,” dated February 8, 1996 (February 20, 1996, 61 FR 6427).

Dated: July 7, 2015.

**Aaron Siegel,**

*Alternate OSD Federal Register Liaison Officer, Department of Defense.*

#### **INGB 004**

##### **System name:**

Joint Services Support System (JSS)

##### **SYSTEM LOCATION:**

Datacenter located at 801 Industrial Boulevard, Suite #200, Grapevine, Texas 76051–8635.

##### **CATEGORIES OF INDIVIDUALS COVERED BY THE SYSTEM:**

Current and former members of the Federally Recognized Air and Army National Guards of the United States, current and former members of the United States Armed Forces, current and former members of the Reserve Components of the United States Armed Forces, family members of current and former members of the National Guard, Armed Forces, and Armed Forces Reserve, Department of Defense civilian employees and contractors, and volunteers.

##### **CATEGORIES OF RECORDS IN THE SYSTEM:**

Service affiliation, name, DoD ID Number, date of birth, personal and business phone number, business email address, entitlement and eligibility information, activation and mobilization dates, unit name and address, employment information (type of employment, dates of employment), employer information (past and current employer name address and phone number).

##### **AUTHORITY FOR MAINTENANCE OF THE SYSTEM:**

10 U.S.C. 10502, Chief, National Guard Bureau; 38 U.S.C. 4301–4335, Employment and Reemployment Rights of Members of the Uniformed Services; 10 U.S.C. 10145, Ready Reserve: placement in; 10 U.S.C. 12302, Ready Reserve; Public Law 110–181, Section 582, Yellow Ribbon Integration; 20 CFR part 1002, Regulations Under the Uniformed Services Employment and Reemployment Rights Act of 1994; DoD Instruction 1342.28, DoD Yellow Ribbon Reintegration Program (YRRP); DoD Manual 7730.54–M, Vol.2, Reserve Components Common Personnel Data System (RCCPDS); Personnel Reports, and DoD Manual 7730.54 Vol. 1, and Reserve Components Common Personnel Data System (RCCPDS): Reporting Procedures.

##### **PURPOSE(S):**

The National Guard Bureau is proposing to add a new system of records that will be a centralized, web-based portal that manages, for the Yellow Ribbon Reintegration Program (YRRP), the entire event life cycle—to include, planning, conducting and reporting, for events held nationwide, for Service members and their families. In addition to YRRP, JSS also aims to support program management activities/ events for other currently participating programs, such as the Family Program, Employer Support Program, Financial Management Awareness Program, Sexual Assault Response and Prevention Program, Psychological Health Program and Warrior Support program, as well as future Guard and Reserve programs supporting the National Guard Bureau (NGB), Manpower and Personnel Directorate. JSS will also support the collection and storage of Civilian Employer Information (CE) from Service members to fulfill the Uniformed Services Employment and Reemployment Rights Act (USERRA) mandate.

Routine uses of records maintained in the system including categories of users and the purpose of such uses:

In addition to those disclosures generally permitted under 5 U.S.C. 552a(b) of the Privacy Act of 1974, as amended, the records contained therein may specifically be disclosed outside the DoD as a routine use pursuant to 5 U.S.C. 552a(b)(3) as follows:

The DoD Blanket Routine Uses set forth at the beginning of the National Guard Bureau compilation of system of records notices may apply to this system. The complete list of DoD blanket routine uses can be found online at: <http://dpcl.d.defense.gov/>

*Privacy/SORNsIndex/BlanketRoutineUses.aspx.*

##### **POLICIES AND PRACTICES FOR STORING, RETRIEVING, ACCESSING, RETAINING, AND DISPOSING OF RECORDS IN THE SYSTEM:**

###### **STORAGE:**

Electronic storage media.

###### **RETRIEVABILITY:**

By DoD ID Number, date of birth and last name, or by name only, depending on the category of individual.

###### **SAFEGUARDS:**

Data center access is limited to only data center technicians and the center uses biometric scanning for controlled data center access. The data center also has security camera monitoring and 24-hour onsite staff providing additional protection against unauthorized entry. All employees are trained on documented information security and privacy procedures. Access to confidential information is restricted to authorized personnel only according to documented processes.

Systems access is logged and tracked for auditing purposes. Secure document-destruction policies are in place for all sensitive information and change-management procedures are fully documented. In addition, there is an independently audited disaster recovery and business continuity of operations plan in place.

###### **RETENTION AND DISPOSAL:**

Disposition pending (until the National Archives and Records Administration approves retention and disposal schedule for the National Guard Bureau all records will be treated as permanent).

###### **SYSTEM MANAGER(S) AND ADDRESS:**

National Guard Bureau (NGB), Manpower and Personnel Directorate (J1), 111 South George Mason Drive, Arlington Hall 2, Arlington, VA 22204–1373.

###### **NOTIFICATION PROCEDURE:**

Individuals who wish to inquire whether this system of records contains information about themselves should address written inquiries to National Guard Bureau (NGB), Manpower and Personnel Directorate (J1), Joint Support Personnel System; 111 South George Mason Drive, Arlington Hall 2, Arlington, VA 22204–1373.

Written requests must include the individual's DoD ID number or their name and date of birth, and full mailing address to receive a response.

In addition, the requester must provide a notarized statement or an unsworn declaration made in

accordance with 28 U.S.C. 1746, in the following format:

If executed outside the United States: 'I declare (or certify, verify, or state) under penalty of perjury under the laws of the United States of America that the foregoing is true and correct. Executed on (date). (Signature)'.

If executed within the United States, its territories, possessions, or commonwealths: 'I declare (or certify, verify, or state) under penalty of perjury that the foregoing is true and correct. Executed on (date). (Signature)'.

#### RECORD ACCESS PROCEDURES:

Individuals seeking to access information about themselves in this system should address written inquiries to National Guard Bureau (NGB), Manpower and Personnel Directorate (J1), 111 South George Mason Drive, Arlington Hall 2, Arlington, VA 22204-1373

Written requests must include the individual's DoD ID number or their name and date of birth, as well as full mailing address to receive a response.

In addition, the requester must provide a notarized statement or an unsworn declaration made in accordance with 28 U.S.C. 1746, in the following format:

If executed outside the United States: 'I declare (or certify, verify, or state) under penalty of perjury under the laws of the United States of America that the foregoing is true and correct. Executed on (date). (Signature)'.

If executed within the United States, its territories, possessions, or commonwealths: 'I declare (or certify, verify, or state) under penalty of perjury that the foregoing is true and correct. Executed on (date). (Signature)'.

#### CONTESTING RECORDS PROCEDURES:

The National Guard Bureau rules for accessing records and for contesting contents and appealing initial agency determinations are published at 32 CFR part 329 or may be obtained from the system manager.

#### RECORD SOURCE CATEGORIES:

Information is collected directly from the individual when registering as a user or registering to attend an event or reporting their civilian employer information. Defense Manpower Data Center (DMDC) also provides additional information about Service members (only), to validate the information collected directly from the Defense Eligibility and Enrollment Reporting System (DEERS) and provide eligibility information to the programs providing the services.

#### EXEMPTIONS CLAIMED FOR THE SYSTEM:

None.

[FR Doc. 2015-16970 Filed 7-10-15; 8:45 am]

BILLING CODE 5001-06-P

## DEPARTMENT OF EDUCATION

[Docket No. ED-2015-ICCD-0086]

### Agency Information Collection Activities; Submission to the Office of Management and Budget for Review and Approval; Comment Request; Professional Development Grants for Indian Children Application Package

**AGENCY:** Office of Elementary and Secondary Education (OESE), Department of Education (ED).

**ACTION:** Notice.

**SUMMARY:** In accordance with the Paperwork Reduction Act of 1995 (44 U.S.C. chapter 3501 *et seq.*), ED is proposing an extension of an existing information collection.

**DATES:** Interested persons are invited to submit comments on or before August 12, 2015.

**ADDRESSES:** Comments submitted in response to this notice should be submitted electronically through the Federal eRulemaking Portal at <http://www.regulations.gov> by selecting Docket ID number ED-2015-ICCD-0086 or via postal mail, commercial delivery, or hand delivery. If the regulations.gov site is not available to the public for any reason, ED will temporarily accept comments at [ICDocketMgr@ed.gov](mailto:ICDocketMgr@ed.gov). Please note that comments submitted by fax or email and those submitted after the comment period will not be accepted; ED will ONLY accept comments during the comment period in this mailbox when the regulations.gov site is not available. Written requests for information or comments submitted by postal mail or delivery should be addressed to the Director of the Information Collection Clearance Division, U.S. Department of Education, 400 Maryland Avenue SW., LBJ, Mailstop L-OM-2-2E319, Room 2E115, Washington, DC 20202.

**FOR FURTHER INFORMATION CONTACT:** For specific questions related to collection activities, please contact John Cheek, 202-401-0274.

**SUPPLEMENTARY INFORMATION:** The Department of Education (ED), in accordance with the Paperwork Reduction Act of 1995 (PRA) (44 U.S.C. 3506(c)(2)(A)), provides the general public and Federal agencies with an opportunity to comment on proposed, revised, and continuing collections of information. This helps the Department

assess the impact of its information collection requirements and minimize the public's reporting burden. It also helps the public understand the Department's information collection requirements and provide the requested data in the desired format. ED is soliciting comments on the proposed information collection request (ICR) that is described below. The Department of Education is especially interested in public comment addressing the following issues: (1) Is this collection necessary to the proper functions of the Department; (2) will this information be processed and used in a timely manner; (3) is the estimate of burden accurate; (4) how might the Department enhance the quality, utility, and clarity of the information to be collected; and (5) how might the Department minimize the burden of this collection on the respondents, including through the use of information technology. Please note that written comments received in response to this notice will be considered public records.

*Title of Collection:* Professional Development Grants for Indian Children Application Package.

*OMB Control Number:* 1810-0580.

*Type of Review:* An extension of an existing information collection.

*Respondents/Affected Public:* State, Local and Tribal Governments.

*Total Estimated Number of Annual Responses:* 50.

*Total Estimated Number of Annual Burden Hours:* 1,500.

**Abstract:** The Office of Indian Education (OIE) of the Department of Education (ED) requests an extension of this previously approved information collection, for the Indian Education Discretionary Grant Applications authorized under Title VII, Part A, of the Elementary and Secondary Education Act, as amended. The Professional Development (PD) (CFDA 84.299B) program is a competitive discretionary grant program. The grant applications submitted for this program are evaluated on the basis of how well an applicant addresses the selection criteria, and are used to determine applicant eligibility and amount of award for projects selected for funding.

The selection criteria used for the Professional Development Grant program are included in 34 CFR 263.6. Sections 263.7, 263.8, 263.9, and 263.10 also have information collection requirements addressed in this clearance request relating to statutory or regulatory requirements.

Dated: July 7, 2015.

**Tomakie Washington,**

*Acting Director, Information Collection Clearance Division, Office of the Chief Privacy Officer, Office of Management.*

[FR Doc. 2015-16962 Filed 7-10-15; 8:45 am]

**BILLING CODE 4000-01-P**

## DEPARTMENT OF EDUCATION

### Applications for New Awards; Improved Reentry Education

**AGENCY:** Office of Career, Technical, and Adult Education, Department of Education.

**ACTION:** Notice.

#### Overview Information

Improved Reentry Education (IRE).

Notice inviting applications for new awards for fiscal year (FY) 2015.

*Catalog of Federal Domestic Assistance (CFDA) Number:* 84.191D.

#### DATES:

*Applications Available:* July 13, 2015.

*Date of Pre-Application Meeting:* July 20, 2015.

*Deadline for Transmittal of Applications:* August 12, 2015.

*Deadline for Intergovernmental Review:* September 11, 2015.

#### Full Text of Announcement

##### I. Funding Opportunity Description

**Purpose of Program:** The purpose of the IRE program is to support demonstration projects in prisoner reentry education that develop evidence of reentry education's effectiveness. IRE seeks to demonstrate that high-quality, appropriately designed, integrated, and well-implemented educational and related services provided in institutional and community settings are critical in supporting educational attainment and reentry success for individuals who have been incarcerated.

**Background:** The economic and civic importance of the programs authorized by the Workforce Innovation and Opportunity Act, 29 U.S.C. 3101 *et. seq.* (WIOA),<sup>1</sup> including the Adult Education and Family Literacy Act (Title II of WIOA) (AEFLA), is amplified by three recent policy documents that highlight the challenges faced by low-skilled adults: (1) "Time for the U.S. to Reskill? What the Survey of Adult Skills Says",<sup>2</sup> released by the Organisation for

Economic Co-operation and Development (OECD); (2) "Ready to Work: Job-Driven Training and American Opportunity",<sup>3</sup> published by the Office of the Vice President; and (3) "Making Skills Everyone's Business",<sup>4</sup> published by the Department.

These reports focus on the large numbers of low-skilled adults in the U.S. and underscore the urgent need to improve services and learning outcomes for adults in federally-funded programs by implementing innovative approaches to teaching and learning.

More than 700,000 incarcerated individuals leave Federal and State prisons each year.<sup>5</sup> Too many of these individuals do not reintegrate successfully into society; within 3 years of release, 4 out of 10 prisoners will be reincarcerated.<sup>6</sup>

This cycle of recidivism contributes significantly to the overall expenditures for corrections, which costs States more than \$50 billion annually.<sup>7</sup> Moreover, the number of individuals cycling in and out of our Nation's prisons jeopardizes public safety and negatively affects those individuals' families and their communities. Approximately 2.7 million children have an incarcerated parent, and these children are more likely to be expelled or suspended from school than children without an incarcerated parent.<sup>8</sup>

Among the male U.S. population aged 20 to 34 years without a high school credential, 1 in 3 black men, 1 in 8 white men, and 1 in 14 Hispanic men

are incarcerated.<sup>9</sup> Formerly incarcerated men earn significantly less per year than those who have never been incarcerated.<sup>10</sup> Unfortunately, many offenders are ill-equipped to break this cycle of reincarceration because they lack the education and workforce skills they need to succeed in the labor market and the cognitive skills (e.g., the ability to solve problems) that are essential to successfully addressing the challenges of reentry.<sup>11</sup> Approximately 41 percent of Federal and State prisoners lack a high school credential, compared to 18 percent of the general population. Fewer than 15 percent have attained a postsecondary credential.<sup>12</sup>

Although most State and Federal prisons offer adult education and career and technical education programs, and some offer postsecondary education, participation in these programs has not kept pace with the growing prison population.<sup>13</sup> Similarly, those under community supervision (parole or probation) often do not participate in education and training programs.<sup>14</sup> Possible reasons for these low participation rates include lack of, or limited access to, programs, limited awareness of program opportunities, reductions in services because of State budget constraints, insufficient personal motivation, and competing demands (e.g., employment) that may take precedence over pursuing education.<sup>15</sup>

<sup>9</sup> The Pew Charitable Trusts. 2010. *Collateral Costs: Incarceration's Effect on Economic Mobility*. Washington, DC: Author. Accessed March 11, 2015, from [www.pewtrusts.org/-/media/legacy/uploadedfiles/pcs\\_assets/2010/CollateralCosts1pdf.pdf](http://www.pewtrusts.org/-/media/legacy/uploadedfiles/pcs_assets/2010/CollateralCosts1pdf.pdf).

<sup>10</sup> Gould, Eric D., Bruce A. Weinberg, and David B. Mustard. 2002. "Crime Rates and Local Labor Market Opportunities in the United States: 1979-1997." *Review of Economics and Statistics* 84 (1): 45-61. Accessed March 11, 2015, from [www.terry.uga.edu/~mustard/labor.pdf](http://www.terry.uga.edu/~mustard/labor.pdf).

<sup>11</sup> MacKenzie, Doris Layton. 2012. "The Effectiveness of Corrections-Based Work and Academic and Vocational Education Programs." In *The Oxford Handbook of Sentencing and Corrections*, edited by Joan Petersilia and Kevin R. Reitz, 492-520. New York: Oxford University Press.

<sup>12</sup> Harlow, Caroline Wolf. 2003. *Education and Correctional Populations*. NCJ 195670. Washington, DC: U.S. Department of Justice, Bureau of Justice Statistics. Accessed March 11, 2015, from [www.bjs.gov/content/pub/pdf/ecp.pdf](http://www.bjs.gov/content/pub/pdf/ecp.pdf).

<sup>13</sup> Western, Bruce, Vincent Schiraldi, and Jason Ziedenberg. 2003. *Education & Incarceration*. Washington, DC: Justice Policy Institute. Accessed March 11, 2015, from [www.justicepolicy.org/images/upload/03-08\\_REP\\_EducationIncarceration\\_AC-BB.pdf](http://www.justicepolicy.org/images/upload/03-08_REP_EducationIncarceration_AC-BB.pdf).

<sup>14</sup> Phillips, Susan D., Alaattin Erkanli, Gordon P. Keeler, E. Jane Costello, & Adrian Angold. 2006. "Disentangling the Risks: Parent Criminal Justice Involvement and Children's Exposure to Family Risks." *Criminology and Public Policy* 5(4): 677-702.

<sup>15</sup> Crayton, Anna, and Suzanne Rebecca Neusteter. 2008. *The Current State of Correctional Education*. Paper prepared for the Reentry Roundtable on Education. New York: John Jay

<sup>1</sup> See [www.gpo.gov/fdsys/pkg/PLAW-113publ128/pdf/PLAW-113publ128.pdf](http://www.gpo.gov/fdsys/pkg/PLAW-113publ128/pdf/PLAW-113publ128.pdf).

<sup>2</sup> OECD (2013), Time for the U.S. to Reskill? What the Survey of Adult Skills Says, OECD Skills Studies, OECD Publishing. Accessed February 11, 2015, from [www.oecd-ilibrary.org/education/time-for-the-u-s-to-reskill\\_9789264204904-en](http://www.oecd-ilibrary.org/education/time-for-the-u-s-to-reskill_9789264204904-en).

<sup>3</sup> Vice President's Office (2014), Ready to Work: Job-driven Training and American Opportunity, Washington, DC: Author. Accessed February 11, 2015, from [www.whitehouse.gov/sites/default/files/docs/skills\\_report.pdf](http://www.whitehouse.gov/sites/default/files/docs/skills_report.pdf).

<sup>4</sup> U.S. Department of Education, (2015, February). Making Skills Everyone's Business: A Call to Transform Adult Learning in the United States. Washington, DC: Author. Accessed February 11, 2015, from [www2.ed.gov/about/offices/list/ovae/pi/AdultEd/making-skills.pdf](http://www2.ed.gov/about/offices/list/ovae/pi/AdultEd/making-skills.pdf).

<sup>5</sup> Guerino, Paul, Paige M. Harrison, and William J. Sabol. 2011. *Prisoners in 2010*. NCJ 236096. Washington, DC: U.S. Department of Justice, Bureau of Justice Statistics. Accessed January 15, 2015, from [bjs.ojp.usdoj.gov/content/pub/pdf/p10.pdf](http://bjs.ojp.usdoj.gov/content/pub/pdf/p10.pdf).

<sup>6</sup> The Pew Center on the States. 2011. *State of Recidivism: The Revolving Door of America's Prisons*. Washington, DC: The Pew Charitable Trusts. Accessed March 11, 2015, from [www.michigan.gov/documents/corrections/Pew\\_Report\\_State\\_of\\_Recidivism\\_350337\\_7.pdf](http://www.michigan.gov/documents/corrections/Pew_Report_State_of_Recidivism_350337_7.pdf).

<sup>7</sup> National Association of State Budget Officers. 2011. *State Expenditure Report: Examining Fiscal 2009-2011 State Spending*. Washington, DC: Author. Accessed January 15, 2015, from [www.nasbo.org/sites/default/files/2010%20State%20Expenditure%20Report.pdf](http://www.nasbo.org/sites/default/files/2010%20State%20Expenditure%20Report.pdf).

<sup>8</sup> Phillips, Susan D., Alaattin Erkanli, Gordon P. Keeler, E. Jane Costello, & Adrian Angold. 2006. "Disentangling the Risks: Parent Criminal Justice Involvement and Children's Exposure to Family Risks." *Criminology and Public Policy* 5(4): 677-702.



It is not surprising, therefore, that formerly incarcerated individuals cited education, job training, and employment as vital needs not generally met during incarceration or after release.<sup>16</sup>

Low-skilled individuals who move in and out of prison may not be able to access well-integrated and sequenced educational programs. Coordination and communication among educational programs and their partner-related service providers, both inside and outside of correctional institutions, are essential to facilitating educational participation and progress. A lack of coordination and communication can result in barriers such as differing standardized assessments and curricula and lack of articulation agreements, making student transfers from one program to another difficult. Other barriers to accessing well-integrated related services and educational programs in institutional and community settings include:

- Misinterpretation of Federal and State privacy laws and insufficient links among data systems, making it difficult for programs to get a comprehensive picture of their students' backgrounds, avoid duplication of effort, and track outcomes.
- A perception among correctional officials (e.g., wardens, parole and probation officers, and court officials) and policymakers that individuals in correctional institutions should not receive educational services; this, in turn, can make it difficult to begin or expand student participation and establish supportive education and reentry policies.
- Inadequate staff training, resulting in ineffective educational services.
- Limited funds, leading to long waiting lists for programs.

Programs based in jails present additional challenges. Because individuals in jails are typically serving a sentence of a year or less, they may not have time to complete a program while incarcerated. The connection between the jail and community-based programs, therefore, is particularly important. On the other hand, individuals incarcerated in prisons may not be released to a nearby community. This can create challenges for prisons trying to develop an education

continuum for students because they may need to develop partnerships with community-based providers across the State.<sup>17</sup>

The Department previously recognized the need for the development of a correctional education reentry model illustrating an education continuum to bridge the gap between prison and community-based education and training programs (Reentry Education Model).<sup>18</sup> Through a grant competition in 2012, Promoting Reentry Success Through Continuity of Educational Opportunities (PRSEO), the Department funded three grant projects specifically to assess the Reentry Education Model in existing correctional and reentry education settings. Recognizing the need for other models to address the reentry education challenge, the Secretary will, through this new competition, support the establishment and operation of projects through partnerships that will implement models for correctional and reentry education based on strong theory (as defined in this notice). Eligible applicants will apply on behalf of a partnership that includes required and optional partners as described in the *Eligible Applicants* section of this notice.

**Note:** Applicants are not required to include the Reentry Education Model in their applications and will not receive any competitive preference as a result of incorporating the Reentry Education Model in their applications.

**Priorities:** This competition contains two absolute priorities. Absolute Priority 1 is from the notice of the Secretary's Final Supplemental Priorities and Definitions for Discretionary Grant Programs published in the **Federal Register** on December 10, 2014, (79 FR 73426) (Secretary's priorities). We are establishing Absolute Priority 2 for this grant competition only and any subsequent year in which we make awards from the list of unfunded applicants from this competition, in accordance with section 437(d)(1) of the General Education Provisions Act (GEPA), 20 U.S.C. 1232(d)(1).

**Absolute Priorities:** For the FY 2015 grant competition and any subsequent year in which we make awards from the list of unfunded applications from this competition, these priorities are absolute priorities. Under 34 CFR

75.105(c)(3), we consider only applications that meet both of these absolute priorities.

#### *Absolute Priority 1—Supporting High-Need Students.*<sup>19</sup>

To meet this priority, an applicant must propose a project designed to improve academic outcomes or learning environments for low-skilled adults (as defined in this notice).

#### *Absolute Priority 2—Improving Supports and Correctional Education.*

To meet this priority, an applicant must propose a project that:

- (1) Improves the quality of education programs in adult correctional facilities and community settings, and
- (2) Links correctional education students to education or job training programs post-release.

#### *Requirements*

##### *Application Requirements*

The project plan submitted within the application must include:

- (a) An approach that demonstrates strong theory (as defined in this notice), which includes a logic model (as defined in this notice) and supporting practice.
- (b) A description of how the applicant will implement, or already has implemented, specified and described elements of a system designed to coordinate education and related services provided in a correctional facility or facilities and in community settings. This description must include the following:
  - (1) The elements of the proposed project, including:
    - (i) A correctional institution student intake protocol that includes assessment, individual educational plan development, and the recording of information in a centralized, electronic data system;
    - (ii) The process the applicant will use for developing individual education plans that address individual student needs;
    - (iii) Educational services with appropriate alignment and content, including basic educational services for low-skilled adults, within correctional facilities and within community-based educational programs for reentering formerly incarcerated persons or other justice-involved individuals such as probationers;
    - (iv) Strategies based on strong theory (as defined in this notice) for:

College of Criminal Justice, Prisoner Reentry Institute. Accessed May 20, 2015, from [www.prisonlegalnews.org/news/publications/prison-state-of-correctional-education/](http://www.prisonlegalnews.org/news/publications/prison-state-of-correctional-education/).

<sup>16</sup> Visher, Christy A., and Pamela K. Lattimore. 2007. "Major Study Examines Prisoners and Their Reentry Needs." *NIJ Journal* 258: 30–33. Accessed March 11, 2015, from [www.ncjrs.gov/pdffiles1/nij/219603g.pdf](http://www.ncjrs.gov/pdffiles1/nij/219603g.pdf).

<sup>17</sup> "Reentry Education Model Implementation Study, Promoting Reentry Success Through Continuity of Educational Opportunities," U.S. Department of Education, 2015.

<sup>18</sup> "A Reentry Education Model, Supporting Education and Career Advancement for Low Skill Individuals in Corrections," U.S. Department of Education, 2012.

<sup>19</sup> See <http://www.gpo.gov/fdsys/pkg/FR-2014-12-10/pdf/2014-28911.pdf>, 79 FR 73426, Priority 4. Also see the *Definition* section of this notice inviting applications for the definitions of "high-need students" and "low-skilled adults."



(A) Improving student outcomes in the attainment of established measures for the AEFLA program,

(B) Increasing the number of students completing their educational programs, and

(C) Increasing the number of students attaining their educational goals;

(v) Pre-release procedures and protocols to support the transition of students, including low-skilled adults, from correctional institution educational programs to community-based educational programs; and

(vi) Intake processes and procedures for the community-based educational services that include—

(A) Connecting incarcerated individuals with community-based services by supporting orientation to, and pre-enrollment in, those services prior to release from the correctional institution,

(B) Timely transfer of student data and educational plans, which are updated as necessary and appropriate, and

(C) A process of communication among all project partners and with the individual students, including a point person for tracking individual progress to the extent practicable and for tracking students transferring to other adult basic education or adult secondary education programs, postsecondary education, training programs, or occupational training programs.

(2) Fundamental program elements, which must include:

(i) A description of the non-Federal funds and in-kind contributions that would be used in the project, if applicable;

(ii) A description of the partnership that will implement the proposed project, including required and optional partners as described under *Eligible Applicants*;

(iii) Electronic data system;

(iv) Staff training;

(v) Reentry policies; and

(vi) Evaluation processes.

(3) Implementation components, including—

(i) The methodology that the applicant used to select the partner(s);

(ii) For each proposed partner, descriptions of—

(A) The populations served by the partner; and

(B) The expected contributions of the partner to the proposed project and the extent to which each partner has committed to the implementation and sustainability of the project.

(iii) Strategies for identifying and allocating human resources among the partners as needed to implement the proposed project;

(iv) The applicant's approach to initial and ongoing personnel development or training for personnel involved in implementing the proposed project; and

(4) Sustainability components, including a plan for:

(i) Assessing the responsibilities for project maintenance and support among the partners at the participating project sites by the end of the project period in order to continue services after the project period ends; and

(ii) Continuing personnel training among the partners in order to build capacity to implement reentry education during the grant project period and to ensure that the project is sustained after the grant project period ends.

(c) A detailed timeline for implementing the proposed project.

(d) A plan for collecting data that will be submitted to the Department, which, at a minimum, must include:

(1) The numbers of individuals who maintain educational participation while transitioning from and among correctional institutions, including to community correctional settings and other community-based educational programs; and

(2) The numbers of adults who acquire basic skills (including English language acquisition), complete secondary education, and transition to further education, training, or to work as indicated by attainment of educational functioning levels, attainment of high school credentials, enrollment in postsecondary education or training programs, and attainment of employment.

(e) A description of the project's strong theory (as defined in this notice), including the logic model and supporting practice and a plan to collect data on the following system outputs:

(1) Changes to policies, procedures, or data collection systems, and

(2) Changes related to student information or record sharing, referrals for services, educational services, assessments, and transition planning.

(f) A proposed budget that includes estimates of the costs of:

(1) Implementing the proposed project, including but not limited to—

(i) Personnel, and

(ii) The various components of the proposed project; and

(2) Attendance of up to two attendees at a required one-and-one-half-day meeting in Washington, DC.

(g) A description of the applicant's formative evaluation plan, consistent with the proposed project's strong theory (as defined in this notice), that:

(1) Includes information on how the data described in paragraph (d) of these

*Application Requirements* will be reviewed by the project staff prior to finalizing data collection plans and again prior to submitting those data to the Department (consistent with the timeline in paragraph (c) of these *Application Requirements*) and how they will be used during the course of the project to adjust the project or its implementation in order to enhance the project's outcomes, generalizability, and potential for sustainability; and

(2) Includes, as appropriate, periodic collection of student and system data in addition to other data relating to fidelity of implementation, stakeholder acceptability, and the types of facilities in which the services are provided (e.g., correctional institution, community center, library).

#### General Requirements

To meet the general requirements of this competition, each applicant must propose to conduct the following activities:

(a) Participate in program activities and collaborative efforts among grantees, Department staff, and the Department-identified technical assistance provider, if applicable, to disseminate information to entities such as adult education providers, correctional institutions, community-based organizations, community colleges, professional organizations, and other entities identified by the Department.

(b) Communicate and collaborate on an ongoing basis with Department-funded or other Department-designated projects in order to share information on successful strategies and challenges for implementing reentry education across correctional and community settings.

(c) Maintain ongoing telephone and email communication with the Department project officer and the administrators of other projects funded under this competition.

(d) Submit data, when and as specified by the Department, in order to evaluate the applicant's success in implementing the project's objectives with reference to the reentry education challenge.

#### Definitions

The definition of "Adult education and literacy activities" is from section 203(2) of the Workforce Innovation and Opportunity Act of 2014, 29 U.S.C. 3272(2) (WIOA). The definitions of "high-minority school," "high need students," and "low-skilled adult" are from the notice of the Secretary's Final Supplemental Priorities and Definitions for Discretionary Grant Programs published in the **Federal Register** on

December 10, 2014, (79 FR 73426). The definitions of “logic model”, “relevant outcome”, and “strong theory” are from the Education Department General Administrative Regulations at 34 CFR 77.1(c).

*Adult education and literacy activities* means programs, activities, and services that include adult education, literacy, workplace adult education and literacy activities, family literacy activities, English language acquisition activities, integrated English literacy and civics education, workforce preparation activities, or integrated education and training.

**Note:** The programs, activities, and services listed in the definition of “adult education and literacy activities” are each defined in section 203 of WIOA, 29 U.S.C. 3272.

*High-minority school* means a school as that term is defined by a local educational agency (LEA), which must define the term in a manner consistent with its State’s Teacher Equity Plan, as required by section 1111(b)(8)(C) of the Elementary and Secondary Education Act of 1965, as amended (ESEA). The applicant must provide the definition(s) of High-minority schools used in its application.

*High-need students* means students who are at risk of educational failure or otherwise in need of special assistance and support, such as students who are living in poverty, who attend high-minority schools (as defined in this notice), who are far below grade level, who have left school before receiving a regular high school diploma, who are at risk of not graduating with a diploma on time, who are homeless, who are in foster care, who have been incarcerated, who have disabilities, or who are English learners.

*Logic model* (also referred to as theory of action) means a well-specified conceptual framework that identifies key components of the proposed process, product, strategy, or practice (i.e., the active “ingredients” that are hypothesized to be critical to achieving the relevant outcomes) and describes the relationships among the key components and outcomes, theoretically and operationally.

*Low-skilled adult* means an adult with low literacy and numeracy skills.

*Relevant outcome* means the student outcome(s) (or the ultimate outcome if not related to students) the proposed process, product, strategy, or practice is designed to improve; consistent with the specific goals of a program.

*Strong theory* means a rationale for the proposed process, product, strategy, or practice that includes a logic model.

*Waiver of Proposed Rulemaking:* Under the Administrative Procedure Act

(5 U.S.C. 553), the Department generally offers interested parties the opportunity to comment on proposed priorities and other requirements. Section 437(d)(1) of the General Education Provisions Act (GEPA), however, allows the Secretary to exempt from rulemaking requirements regulations governing the first grant competition under a new or substantially revised program authority. This is the first grant competition for this program under AEFLA, Title II of WIOA, section 242, National Leadership Activities, 29 U.S.C. 3332, and therefore qualifies for this exemption. In order to ensure timely grant awards, the Secretary has decided to forgo public comment on the priorities and other requirements under section 437(d)(1) of GEPA. These priorities and other requirements will apply to the FY 2015 grant competition and any subsequent year in which we make awards from the list of unfunded applicants from this competition.

*Program Authority:* 29 U.S.C. 3332.

*Applicable Regulations:* (a) The Education Department General Administrative Regulations (EDGAR) in 34 CFR parts 75, 77, 79, 81, 82, 84, 86, 97, 98, and 99. (b) The OMB Guidelines to Agencies on Governmentwide Debarment and Suspension (Nonprocurement) in 2 CFR part 180, as adopted and amended as regulations of the Department in 2 CFR part 3485, and the Uniform Administrative Requirements, Cost Principles, and Audit Requirements for Federal Awards in 2 CFR part 200, as adopted and amended in 2 CFR part 3474.

**Note:** The regulations in 34 CFR part 79 apply to all applicants except federally-recognized Indian tribes.

**Note:** The regulations in 34 CFR part 86 apply only to institutions of higher education.

## II. Award Information

Type of Award: Discretionary grants.

Estimated Available Funds: \$2,700,000 for the first 12 months of this project period. Funding for program years two and three is subject to the availability of funds and to a grantee meeting the requirements of 34 CFR 75.253. Contingent upon the availability of funds and the quality of applications, we may make additional awards in FY 2016 and future years from the list of unfunded applications from this competition.

Estimated Range of Awards: \$200,000–\$350,000.

Estimated Average Size of Award: \$300,000.

Estimated Number of Awards: 9.

**Note:** The Department is not bound by any estimates in this notice.

Project Period: Up to 36 months. Applicants under this competition are required to provide detailed budget information for each of the three years of this project and for the total grant.

## III. Eligibility Information

### 1. Eligible Applicants:

(a) An application must be submitted by an eligible applicant, as described in paragraph (b) of this section, on behalf of a partnership that involves the required partners in subparagraph (c)(i) of this section, and any optional partners in subparagraph (c)(ii) of this section.

(b) Eligible applicant means one of the following organizations that currently provide adult education and literacy activities:

- (i) correctional institutions;
- (ii) community correction facilities or organizations;
- (iii) intermediary prisoner reentry service providers;
- (iv) community-based educational service providers;
- (v) other community-based or faith-based organizations;
- (vi) volunteer literacy organizations;
- (vii) institutions of higher education, including community college or technical colleges;
- (viii) public or private nonprofit agencies;
- (ix) libraries;
- (x) occupational training providers;
- (xi) public housing authorities; or
- (xii) nonprofit institutions not described above that provide adult education and literacy activities in correctional institutions or community settings.

(c) The partnership on whose behalf the application is submitted—

(i) Must include—

(A) The eligible applicant submitting the application, and

(B) One or more correctional institutions, as identified in the list of eligible applicants in paragraph (b)(i) of this section, at least one of which must currently offer adult basic education services or English literacy programs; and

(ii) May also include one or more of the other eligible applicants identified above in paragraph (b) of this section.

2. *Cost Sharing or Matching:* This program does not require cost sharing or matching.

## IV. Application and Submission Information

### 1. Address to Request Application

*Package:* You can obtain an application package via the Internet or from the

Education Publications Center (ED Pubs), or from the program office.

To obtain a copy via the Internet, use the following address: [www.ed.gov/fund/grant/apply/grantapps/index.html](http://www.ed.gov/fund/grant/apply/grantapps/index.html). To obtain a copy from ED Pubs, write, fax, or call the following: ED Pubs, U.S. Department of Education, P.O. Box 22207, Alexandria, VA 22304. Telephone, toll free: 1-877-433-7827. FAX: (703) 605-6794. If you use a telecommunications device for the deaf (TDD) or a text telephone (TTY), call, toll free: 1-877-576-7734.

You can contact ED Pubs at its Web site, also: [www.EDPubs.gov](http://www.EDPubs.gov) or at its email address: [edpubs@inet.ed.gov](mailto:edpubs@inet.ed.gov).

If you request an application package from ED Pubs, be sure to identify this program or competition as follows: CFDA number 84.191D

To obtain a copy from the program office, contact the persons listed under **FOR FURTHER INFORMATION CONTACT** in section VII of this notice.

Individuals with disabilities can obtain a copy of the application package in an accessible format (e.g., braille, large print, audiotape, or compact disc) by contacting the person or team listed under Accessible Format in section VIII of this notice.

**2. a. Content and Form of Application Submission:** Requirements concerning the content of an application, together with the forms you must submit, are in the application package for this competition.

**Page Limit:** The application narrative (Part III of the application) is where you, the applicant, address the selection criteria that reviewers use to evaluate your application. You must limit the application narrative [Part III] to no more than 30 pages, using the following standards:

- A "page" is 8.5" x 11", on one side only, with 1" margins at the top, bottom, and both sides.
- Double space (no more than three lines per vertical inch) all text in the application narrative, including titles, headings, footnotes, quotations, references, and captions, as well as all text in charts, tables, figures, and graphs.
- Use a font that is either 12 point or larger or no smaller than 10 pitch (characters per inch).
- Use one of the following fonts: Times New Roman, Courier, Courier New, or Arial. An application submitted in any other font (including Times Roman or Arial Narrow) will not be accepted.

The page limit does not apply to Part I, the cover sheet; Part II, the budget section, including the narrative budget justification; Part IV, the assurances and

certifications; or the one-page abstract, the resumes, the bibliography, or the letters of support. However, the page limit does apply to all of the application narrative section [Part III].

Our reviewers will not read any pages of your application that exceed the page limit.

**2. b. Content and Form of Application Submission:**

Given the types of projects that may be proposed in applications for the IRE program, your application may include business information that the applicant considers proprietary. The Department's regulations define "business information" in 34 CFR 5.11.

Because we plan to make successful applications available to the public upon request, you may wish to request confidentiality of business information. Consistent with Executive Order 12600, please designate in your application any information that you feel is exempt from disclosure under Exemption 4 of the Freedom of Information Act. In the appropriate Appendix section of your application, under "Other Attachments Form," please list the page number or numbers on which we can find this information. For additional information please see 34 CFR 5.11(c).

**3. Submission Dates and Times:**

Applications Available: July 13, 2015.  
Deadline for Transmittal of Applications: August 12, 2015.

Applications for grants under this competition must be submitted electronically using the Grants.gov Apply site. For information (including dates and times) about how to submit your application electronically, or in paper format by mail or hand delivery if you qualify for an exception to the electronic submission requirement, please refer to section IV.7. *Other Submission Requirements* of this notice.

We do not consider an application that does not comply with the deadline requirements.

Individuals with disabilities who need an accommodation or auxiliary aid in connection with the application process should contact the person listed under **FOR FURTHER INFORMATION CONTACT** in section VII of this notice. If the Department provides an accommodation or auxiliary aid to an individual with a disability in connection with the application process, the individual's application remains subject to all other requirements and limitations in this notice.

Deadline for Intergovernmental Review: September 11, 2015.

**4. Intergovernmental Review:** This program is subject to Executive Order 12372 and the regulations in 34 CFR

part 79. Information about Intergovernmental Review of Federal Programs under Executive Order 12372 is in the application package for this program.

**5. Funding Restrictions:** We reference regulations outlining funding restrictions in the *Applicable Regulations* section of this notice.

**6. Data Universal Numbering System Number, Taxpayer Identification Number, and System for Award Management:**

To do business with the Department of Education, you must—

- a. Have a Data Universal Numbering System (DUNS) number and a Taxpayer Identification Number (TIN);
- b. Register both your DUNS number and TIN with the System for Award Management (SAM) (formerly the Central Contractor Registry (CCR)), the Government's primary registrant database;
- c. Provide your DUNS number and TIN on your application; and
- d. Maintain an active SAM registration with current information while your application is under review by the Department and, if you are awarded a grant, during the project period.

You can obtain a DUNS number from Dun and Bradstreet. A DUNS number can be created within one-to-two business days.

If you are a corporate entity, agency, institution, or organization, you can obtain a TIN from the Internal Revenue Service. If you are an individual, you can obtain a TIN from the Internal Revenue Service or the Social Security Administration. If you need a new TIN, please allow 2-5 weeks for your TIN to become active.

The SAM registration process can take approximately seven business days, but may take upwards of several weeks, depending on the completeness and accuracy of the data entered into the SAM database by an entity. Thus, if you think you might want to apply for Federal financial assistance under a program administered by the Department, please allow sufficient time to obtain and register your DUNS number and TIN. We strongly recommend that you register early.

**Note:** Once your SAM registration is active, you will need to allow 24 to 48 hours for the information to be available in Grants.gov and before you can submit an application through Grants.gov.

If you are currently registered with SAM, you may not need to make any changes. However, please make certain that the TIN associated with your DUNS number is correct. Also note that you will need to update your registration

annually. This may take three or more business days.

Information about SAM is available at [www.SAM.gov](http://www.SAM.gov). To further assist you with obtaining and registering your DUNS number and TIN in SAM or updating your existing SAM account, we have prepared a SAM.gov Tip Sheet, which you can find at: [www2.ed.gov/fund/grant/apply/sam-faqs.html](http://www2.ed.gov/fund/grant/apply/sam-faqs.html).

In addition, if you are submitting your application via Grants.gov, you must (1) be designated by your organization as an Authorized Organization Representative (AOR); and (2) register yourself with Grants.gov as an AOR. Details on these steps are outlined at the following Grants.gov Web page: [www.grants.gov/web/grants/register.html](http://www.grants.gov/web/grants/register.html).

**7. Other Submission Requirements:** Applications for grants under this program must be submitted electronically unless you qualify for an exception to this requirement in accordance with the instructions in this section.

#### a. Electronic Submission of Applications

Applications for grants under this competition must be submitted electronically using the Governmentwide Grants.gov Apply site at [www.Grants.gov](http://www.Grants.gov). Through this site, you will be able to download a copy of the application package, complete it offline, and then upload and submit your application. You may not email an electronic copy of a grant application to us.

We will reject your application if you submit it in paper format unless, as described elsewhere in this section, you qualify for one of the exceptions to the electronic submission requirement *and* submit, no later than two weeks before the application deadline date, a written statement to the Department that you qualify for one of these exceptions. Further information regarding calculation of the date that is two weeks before the application deadline date is provided later in this section under *Exception to Electronic Submission Requirement*.

You may access the electronic grant application for IRE at [www.Grants.gov](http://www.Grants.gov). You must search for the downloadable application package for this program by the CFDA number. Do not include the CFDA number's alpha suffix in your search (e.g., search for 84.191, not 84.191D).

Please note the following:

- When you enter the Grants.gov site, you will find information about submitting an application electronically through the site, as well as the hours of operation.

- Applications received by Grants.gov are date and time stamped. Your application must be fully uploaded and submitted and must be date and time stamped by the Grants.gov system no later than 4:30:00 p.m., Washington, DC time, on the application deadline date.

Except as otherwise noted in this section, we will not accept your application if it is received—that is, date and time stamped by the Grants.gov system—after 4:30:00 p.m., Washington, DC time, on the application deadline date. We do not consider an application that does not comply with the deadline requirements. When we retrieve your application from Grants.gov, we will notify you if we are rejecting your application because it was date and time stamped by the Grants.gov system after 4:30:00 p.m., Washington, DC time, on the application deadline date.

- The amount of time it can take to upload an application will vary depending on a variety of factors, including the size of the application and the speed of your Internet connection. Therefore, we strongly recommend that you do not wait until the application deadline date to begin the submission process through Grants.gov.

- You should review and follow the Education Submission Procedures for submitting an application through Grants.gov that are included in the application package for this competition to ensure that you submit your application in a timely manner to the Grants.gov system. You can also find the Education Submission Procedures pertaining to Grants.gov under News and Events on the Department's G5 system home page at [www.G5.gov](http://www.G5.gov).

- You will not receive additional point value because you submit your application in electronic format, nor will we penalize you if you qualify for an exception to the electronic submission requirement, as described elsewhere in this section, and submit your application in paper format.

- You must submit all documents electronically, including all information you typically provide on the following forms: The Application for Federal Assistance (SF 424), the Department of Education Supplemental Information for SF 424, Budget Information—Non-Construction Programs (ED 524), and all necessary assurances and certifications.

- You must upload any narrative sections and all other attachments to your application as files in a PDF (Portable Document) read-only, non-modifiable format. Do not upload an interactive or fillable PDF file. If you upload a file type other than a read-only, non-modifiable PDF or submit a

password-protected file, we will not review that material.

- Your electronic application must comply with any page-limit requirements described in this notice.

- After you electronically submit your application, you will receive from Grants.gov an automatic notification of receipt that contains a Grants.gov tracking number. (This notification indicates receipt by Grants.gov only, not receipt by the Department.) The Department then will retrieve your application from Grants.gov and send a second notification to you by email. This second notification indicates that the Department has received your application and has assigned your application a PR/Award number (an ED specified identifying number unique to your application).

- We may request that you provide us original signatures on forms at a later date.

**Application Deadline Date Extension in Case of Technical Issues with the Grants.gov System:** If you are experiencing problems submitting your application through Grants.gov, please contact the Grants.gov Support Desk, toll free, at 1-800-518-4726. You must obtain a Grants.gov Support Desk Case Number and must keep a record of it.

If you are prevented from electronically submitting your application on the application deadline date because of technical problems with the Grants.gov system, we will grant you an extension until 4:30:00 p.m., Washington, DC time, the following business day to enable you to transmit your application electronically or by hand delivery. You also may mail your application by following the mailing instructions described elsewhere in this notice.

If you submit an application after 4:30:00 p.m., Washington, DC time, on the application deadline date, please contact the person listed under **FOR FURTHER INFORMATION CONTACT** in section VII of this notice and provide an explanation of the technical problem you experienced with Grants.gov, along with the Grants.gov Support Desk Case Number. We will accept your application if we can confirm that a technical problem occurred with the Grants.gov system and that that problem affected your ability to submit your application by 4:30:00 p.m., Washington, DC time, on the application deadline date. The Department will contact you after a determination is made on whether your application will be accepted.

**Note:** The extensions to which we refer in this section apply only to the unavailability

of, or technical problems with, the Grants.gov system. We will not grant you an extension if you failed to fully register to submit your application to Grants.gov before the application deadline date and time or if the technical problem you experienced is unrelated to the Grants.gov system.

**Exception to Electronic Submission Requirement:** You qualify for an exception to the electronic submission requirement, and may submit your application in paper format, if you are unable to submit an application through the Grants.gov system because—

- You do not have access to the Internet; or
  - You do not have the capacity to upload large documents to the Grants.gov system; and
  - No later than two weeks before the application deadline date (14 calendar days or, if the fourteenth calendar day before the application deadline date falls on a Federal holiday, the next business day following the Federal holiday), you mail or fax a written statement to the Department, explaining which of the two grounds for an exception prevent you from using the Internet to submit your application.
- If you mail your written statement to the Department, it must be postmarked no later than two weeks before the application deadline date. If you fax your written statement to the Department, we must receive the faxed statement no later than two weeks before the application deadline date. Address and mail or fax your statement to: Tammi Fergusson, U.S. Department of Education, 400 Maryland Avenue SW., Room 11009, PCP, Washington, DC 20202-7240. FAX: (202) 245-7839.

Your paper application must be submitted in accordance with the mail or hand delivery instructions described in this notice.

#### b. Submission of Paper Applications by Mail

If you qualify for an exception to the electronic submission requirement, you may mail (through the U.S. Postal Service or a commercial carrier) your application to the Department. You must mail the original and two copies of your application, on or before the application deadline date, to the Department at the following address: U.S. Department of Education, Application Control Center, Attention: (CFDA Number 84.191D), LBJ Basement Level 1, 400 Maryland Avenue SW., Washington, DC 20202-4260.

You must show proof of mailing consisting of one of the following:

- (1) A legibly dated U.S. Postal Service postmark.

- (2) A legible mail receipt with the date of mailing stamped by the U.S. Postal Service.

- (3) A dated shipping label, invoice, or receipt from a commercial carrier.

- (4) Any other proof of mailing acceptable to the Secretary of the U.S. Department of Education.

If you mail your application through the U.S. Postal Service, we do not accept either of the following as proof of mailing:

- (1) A private metered postmark.
- (2) A mail receipt that is not dated by the U.S. Postal Service. If your application is postmarked after the application deadline date, we will not consider your application.

**Note:** The U.S. Postal Service does not uniformly provide a dated postmark. Before relying on this method, you should check with your local post office.

#### c. Submission of Paper Applications by Hand Delivery

If you qualify for an exception to the electronic submission requirement, you (or a courier service) may deliver your paper application to the Department by hand. You must deliver the original and two copies of your application by hand, on or before the application deadline date, to the Department at the following address: U.S. Department of Education, Application Control Center, Attention: (CFDA Number 84.191D), 550 12th Street SW., Room 7041, Potomac Center Plaza, Washington, DC 20202-4260.

The Application Control Center accepts hand deliveries daily between 8:00 a.m. and 4:30:00 p.m., Washington, DC time, except Saturdays, Sundays, and Federal holidays.

**Note for Mail or Hand Delivery of Paper Applications:** If you mail or hand deliver your application to the Department:

- (1) You must indicate on the envelope and—if not provided by the Department—in Item 11 of the SF 424 the CFDA number, including suffix letter, if any, of the competition under which you are submitting your application; and
- (2) The Application Control Center will mail to you a notification of receipt of your grant application. If you do not receive this notification within 15 business days from the application deadline date, you should call the U.S. Department of Education Application Control Center at (202) 245-6288.

### V. Application Review Information

1. *Selection Criteria:* The selection criteria for this program are from 34 CFR 75.210 of EDGAR and are listed in the following paragraphs. The maximum score for all the selection criteria is 100 points.

In addressing each criterion, applicants are encouraged to make

explicit connections to relevant aspects of responses to other selection criteria. The selection criteria are as follows:

(1) *Need for project* (up to 10 points).

(a) The Secretary considers the need for the proposed project.

(b) In determining the need for the proposed project, the Secretary considers one or more of the following factors:

(i) The magnitude of the need for the services to be provided or the activities to be carried out by the proposed project; and

(ii) The extent to which specific gaps or weaknesses in services, infrastructure, or opportunities have been identified and will be addressed by the proposed project, including the nature and magnitude of those gaps or weaknesses.

(2) *Significance* (up to 20 points).

(a) The Secretary considers the significance of the proposed project.

(b) In determining the significance of the proposed project, the Secretary considers—

(i) The extent to which the proposed project is likely to build local capacity to provide, improve, or expand services that address the needs of the target population; and

(ii) The importance or magnitude of the results or outcomes likely to be attained by the proposed project.

(3) *Quality of the project design* (up to 30 points).

(a) The Secretary considers the quality of the design of the proposed project.

(b) In determining the quality of the design of the proposed project, the Secretary considers—

(i) The extent to which the goals, objectives, and outcomes to be achieved by the proposed project are clearly specified and measurable;

(ii) The extent to which there is a conceptual framework underlying the proposed research or demonstration activities and the quality of that framework;

(iii) The extent to which the proposed project is designed to build capacity and yield results that will extend beyond the period of Federal financial assistance;

(iv) The extent to which the proposed project will integrate with or build on similar or related efforts to improve relevant outcomes (as defined in 34 CFR 77.1(c)), using existing funding streams from other programs or policies supported by community, State, and Federal resources; and

(v) The extent to which the proposed project is supported by strong theory (as defined in 34 CFR 77.1(c)).

(4) *Adequacy of resources* (up to 15 points).

(a) The Secretary considers the adequacy of resources for the proposed project.

(b) In determining the adequacy of resources for the proposed project, the Secretary considers—

(i) The relevance and demonstrated commitment of each partner in the proposed project to the implementation and success of the project;

(ii) The extent to which the costs are reasonable in relation to the objectives, design, and potential significance of the proposed project; and

(iii) The potential for continued support of the project after Federal funding ends, including, as appropriate, the demonstrated commitment of appropriate entities to such support.

(5) *Quality of the management plan* (up to 10 points).

(a) The Secretary considers the quality of the management plan for the proposed project.

(b) In determining the quality of the management plan for the proposed project, the Secretary considers—

(i) The adequacy of the management plan to achieve the objectives of the proposed project on time and within budget, including clearly defined responsibilities, timelines, and milestones for accomplishing project tasks;

(ii) The extent to which the time commitments of the project director and principal investigator and other key project personnel are appropriate and adequate to meet the objectives of the proposed project.

(6) *Quality of the project evaluation* (up to 15 points).

(a) The Secretary considers the quality of the evaluation to be conducted of the proposed project.

(b) In determining the quality of the evaluation, the Secretary considers—

(i) The extent to which the methods of evaluation include the use of objective performance measures that are clearly related to the intended outcomes of the project and will produce quantitative and qualitative data to the extent possible; and

(ii) The extent to which the methods of evaluation will, if well-implemented, produce strong evidence (as defined in 34 CFR 77.1(c)).

(i) The extent to which the methods of evaluation will provide valid and reliable performance data on relevant outcomes (as defined in this notice).

2. *Review and Selection Process:* We remind potential applicants that in reviewing applications in any discretionary grant competition, the Secretary may consider, under 34 CFR 75.217(d)(3), the past performance of the applicant in carrying out a previous

award, such as the applicant's use of funds, achievement of project objectives, and compliance with grant conditions. The Secretary may also consider whether the applicant failed to submit a timely performance report or submitted a report of unacceptable quality.

In addition, in making a competitive grant award, the Secretary also requires various assurances including those applicable to Federal civil rights laws that prohibit discrimination in programs or activities receiving Federal financial assistance from the Department of Education (34 CFR 100.4, 104.5, 106.4, 108.8, and 110.23).

3. *Special Conditions:* Under 2 CFR 3474.10, the Secretary may impose special conditions and, in appropriate circumstances, high-risk conditions on a grant if the applicant or grantee is not financially stable; has a history of unsatisfactory performance; has a financial or other management system that does not meet the standards in 2 CFR part 200, subpart D, as applicable; has not fulfilled the conditions of a prior grant; or is otherwise not responsible.

## VI. Award Administration Information

1. *Award Notices:* If your application is successful, we notify your U.S. Representative and U.S. Senators and send you a Grant Award Notification (GAN); or we may send you an email containing a link to access an electronic version of your GAN. We may notify you informally, also. If your application is not evaluated or not selected for funding, we notify you.

2. *Administrative and National Policy Requirements:* We identify administrative and national policy requirements in the application package and reference these and other requirements in the Applicable Regulations section of this notice.

We reference the regulations outlining the terms and conditions of an award in the Applicable Regulations section of this notice and include these and other specific conditions in the GAN. The GAN also incorporates your approved application as part of your binding commitments under the grant.

3. *Reporting:* (a) If you apply for a grant under this competition, you must ensure that you have in place the necessary processes and systems to comply with the reporting requirements in 2 CFR part 170 should you receive funding under the competition. This does not apply if you have an exception under 2 CFR 170.110(b).

(b) At the end of your project period, you must submit a final performance report, including financial information,

as directed by the Secretary. If you receive a multi-year award, you must submit an annual performance report that provides the most current performance and financial expenditure information as directed by the Secretary under 34 CFR 75.118. The Secretary may also require more frequent performance reports under 34 CFR 75.720(c). For specific requirements on reporting, please go to [www.ed.gov/fund/grant/apply/appforms/appforms.html](http://www.ed.gov/fund/grant/apply/appforms/appforms.html).

4. *Performance Measures:* Under the Government Performance and Results Act, the Department has established goals and measures for the Adult Education and Family Literacy Act program.

One of the established goals of AEFLA is to support adult education systems that result in increased adult achievement in order to prepare adults, including individuals in correctional settings, for family, work, citizenship, and future learning. The AEFLA program provides adults with opportunities to acquire basic foundation skills (including English language acquisition), complete secondary education, and transition to further education and training and to work. There are four established measures for the AEFLA program that are applicable for adults in the IRE program. These measures are—

(1) The percentage of adults enrolled in English literacy programs served by the program who acquire the level of English language skills needed to complete the levels of instruction in which they enrolled.

(2) The percentage of adults enrolled in adult basic education programs served by the program who acquire the level of basic skills needed to complete the level of instruction in which they enrolled.

(3) The percentage of all enrolled adults in the applicable population served by the program who obtain certification of attaining passing scores on a State-recognized high school equivalency test or obtain a diploma or State-recognized equivalent, documenting satisfactory completion of secondary studies (high school or adult high school)<sup>20</sup>

(4) The percentage of adults in the applicable population served by the

<sup>20</sup> The applicable population consists of all enrolled learners who take all GED tests, are enrolled in adult high school at the high ASE level, or are enrolled in the assessment phase of the External Diploma Program who exit during the program years.

program that enter postsecondary education or a training program.<sup>21</sup>

Under the Government Performance and Results Act, the Department has established goals and measures for the recidivism of individuals who have been in correctional institutions. The measure related to recidivism is—

(5) The percentage of adults served by the program who, within one year of release, have criminal justice system involvement (arrest, re-conviction, violation of parole conditions, or return to incarceration).

Grantees will be responsible for providing data to support evaluation of these objectives.

5. *Continuation Awards:* In making a continuation award under 34 CFR 75.253, the Secretary considers, among other things: whether a grantee has made substantial progress in achieving the goals and objectives of the project; whether the grantee has expended funds in a manner that is consistent with its approved application and budget; and, if the Secretary has established performance measurement requirements, the performance targets in the grantee's approved application. In making a continuation grant, the Secretary also considers whether the grantee is operating in compliance with the assurances in its approved application, including those applicable to Federal civil rights laws that prohibit discrimination in programs or activities receiving Federal financial assistance from the Department (34 CFR 100.4, 104.5, 106.4, 108.8, and 110.23).

## VII. Agency Contact

### FOR FURTHER INFORMATION CONTACT:

Tammi Fergusson, U.S. Department of Education, 400 Maryland Avenue SW., Room 11009, Potomac Center Plaza (PCP), Washington, DC 20202. Telephone: (202) 245-7706 or by email: [Tammi.Fergusson@ed.gov](mailto:Tammi.Fergusson@ed.gov).

If you use a TDD or TTY, call the FRS, toll free, at 1-800-877-8339.

## VIII. Other Information

*Accessible Format:* Individuals with disabilities can obtain this document and a copy of the application package in an accessible format (e.g., braille, large

print, audiotape, or compact disc) on request to the program contact person listed under **FOR FURTHER INFORMATION CONTACT** in section VII of this notice.

*Electronic Access to This Document:* The official version of this document is the document published in the **Federal Register**. Free Internet access to the official edition of the **Federal Register** and the Code of Federal Regulations is available via the Federal Digital System at: [www.gpo.gov/fdsys](http://www.gpo.gov/fdsys). At this site you can view this document, as well as all other documents of this Department published in the **Federal Register**, in text or Adobe Portable Document Format (PDF). To use PDF you must have Adobe Acrobat Reader, which is available free at the site. You may also access documents of the Department published in the **Federal Register** by using the article search feature at: [www.federalregister.gov](http://www.federalregister.gov). Specifically, through the advanced search feature at this site, you can limit your search to documents published by the Department.

Dated: July 7, 2015.

Johan E. Uvin,

*Acting Assistant Secretary for Career, Technical, and Adult Education.*

[FR Doc. 2015-17046 Filed 7-10-15; 8:45 am]

BILLING CODE 4000-01-P

## DEPARTMENT OF ENERGY

### [Certification Notice—236]

### Notice of Filing of Self-Certification of Coal Capability Under the Powerplant and Industrial Fuel Use Act

**AGENCY:** Office of Electricity Delivery and Energy Reliability, DOE.

**ACTION:** Notice of filing.

**SUMMARY:** On June 5, 2015, Panda Stonewall LLC, as owner and operator of a new base load electric powerplant, submitted a coal capability self-certification to the Department of Energy (DOE) pursuant to § 201(d) of the Powerplant and Industrial Fuel Use Act of 1978 (FUA), as amended, and DOE regulations in 10 CFR 501.60, 61. FUA and regulations thereunder require DOE to publish a notice of filing of self-certification in the **Federal Register**. 42 U.S.C. 8311(d) and 10 CFR 501.61(c).

**ADDRESSES:** Copies of coal capability self-certification filings are available for public inspection, upon request, in the Office of Electricity Delivery and Energy Reliability, Mail Code OE-20, Room 8G-024, Forrestal Building, 1000 Independence Avenue SW., Washington, DC 20585.

**FOR FURTHER INFORMATION CONTACT:** Christopher Lawrence at (202) 586-5260.

**SUPPLEMENTARY INFORMATION:** Title II of FUA, as amended (42 U.S.C. 8301 *et seq.*), provides that no new base load electric powerplant may be constructed or operated without the capability to use coal or another alternate fuel as a primary energy source. Pursuant to FUA in order to meet the requirement of coal capability, the owner or operator of such a facility proposing to use natural gas or petroleum as its primary energy source shall certify to the Secretary of Energy (Secretary) prior to construction, or prior to operation as a base load electric powerplant, that such powerplant has the capability to use coal or another alternate fuel. Such certification establishes compliance with FUA section 201(a) as of the date it is filed with the Secretary. 42 U.S.C. 8311.

The following owner of a proposed new base load electric powerplant has filed a self-certification of coal-capability with DOE pursuant to FUA section 201(d) and in accordance with DOE regulations in 10 CFR 501.60, 61:

*Owner:* Panda Stonewall LLC.

*Capacity:* 778 megawatts (MW).

*Plant Location:* 20260 Energy Park Drive, Leesburg, VA 20175.

*In-Service Date:* May 2017.

Issued in Washington, DC, on July 7, 2015.

Christopher Lawrence,

*Electricity Policy Analyst, Office of Electricity Delivery and Energy Reliability.*

[FR Doc. 2015-17072 Filed 7-10-15; 8:45 am]

BILLING CODE 6450-01-P

## DEPARTMENT OF ENERGY

### Public Availability of Department of Energy FY 2014 Service Contract Inventory

**AGENCY:** Department of Energy.

**ACTION:** Notice of public availability of FY 2014 Service Contract Inventories.

**SUMMARY:** In accordance with Section 743 of Division C of the Consolidated Appropriations Act of 2010 (Pub. L. 111-117), the Department of Energy (DOE) is publishing this notice to advise the public on the availability of the FY 2014 Service Contract inventory. This inventory provides information on service contract actions over \$25,000 that DOE completed in FY 2014. The information is organized by function to show how contracted resources are distributed throughout the agency. The inventory has been developed in accordance with guidance issued on November 5, 2010, by the Office of Management and Budget's Office of

<sup>21</sup> The applicable population consists of all adults who passed the state approved high school equivalency test or earned a secondary credential while enrolled in adult education, have a secondary credential at entry, or are enrolled in a class specifically designed for transitioning to postsecondary education who exit during the program year. Entry into postsecondary education or training can occur any time from the time of exit through the end of the following program year. A transition class is a class that has a specific purpose to prepare students for entry into postsecondary education, training, or an apprenticeship program.



Federal Procurement Policy (OFPP). OFPP's guidance is available at <http://www.whitehouse.gov/sites/default/files/omb/procurement/memo/service-contract-inventories-guidance-11052010.pdf>. On December 19, 2011, OFPP issued additional guidance available at <http://www.whitehouse.gov/sites/default/files/omb/procurement/memo/service-contract-inventory-guidance.pdf>.

Except for minor changes to reporting deadlines, the guidance for preparing and analyzing FY 2014 inventories is essentially unchanged from OFPP's November 5, 2010, guidance for preparing the FY 2010 inventory. DOE has posted its inventory and a summary of the inventory at: <http://energy.gov/management/downloads/service-contract-inventory>.

**FOR FURTHER INFORMATION CONTACT:**

Questions regarding the service contract inventory should be directed to Jeff Davis in the Strategic Programs Division at 202-287-1877 or [jeff.davis@hq.doe.gov](mailto:jeff.davis@hq.doe.gov).

Dated: July 6, 2015.

**Patrick M. Ferraro,**

*Director, Office of Acquisition Management.*

[FR Doc. 2015-17038 Filed 7-10-15; 8:45 am]

**BILLING CODE 6450-01-P**

## DEPARTMENT OF ENERGY

[OE Docket No. EA-182-D]

### Application to Export Electric Energy; H.Q. Energy Services (U.S.) Inc.

**AGENCY:** Office of Electricity Delivery and Energy Reliability, DOE.

**ACTION:** Notice of application.

**SUMMARY:** H.Q. Energy Services (U.S.) Inc. (Applicant or HQUS) has applied to renew its authority to transmit electric energy from the United States to Canada pursuant to section 202(e) of the Federal Power Act.

**DATES:** Comments, protests, or motions to intervene must be submitted on or before August 12, 2015.

**ADDRESSES:** Comments, protests, motions to intervene, or requests for more information should be addressed to: Office of Electricity Delivery and Energy Reliability, Mail Code: OE-20, U.S. Department of Energy, 1000 Independence Avenue SW., Washington, DC 20585-0350. Because of delays in handling conventional mail, it is recommended that documents be transmitted by overnight mail, by electronic mail to [Electricity.Exports@hq.doe.gov](mailto:Electricity.Exports@hq.doe.gov), or by facsimile to 202-586-8008.

**SUPPLEMENTARY INFORMATION:** Exports of electricity from the United States to a foreign country are regulated by the Department of Energy (DOE) pursuant to sections 301(b) and 402(f) of the Department of Energy Organization Act (42 U.S.C. 7151(b), 7172(f)) and require authorization under section 202(e) of the Federal Power Act (16 U.S.C. 824a(e)).

On July 19, 2010, DOE issued Order No. EA-182-C to HQUS, which authorized the Applicant to transmit electric energy from the United States to Canada as a power marketer for a five-year term using existing international transmission facilities. That authority expires on August 21, 2015. On June 10, 2015, HQUS filed an application with DOE for renewal of the export authority contained in Order No. EA-182 for an additional five-year term.

In its application, HQUS states that it does not own or operate any electric generation or transmission facilities, and it does not have a franchised service area. The electric energy that HQUS proposes to export to Canada would be surplus energy purchased from third parties such as electric utilities and Federal power marketing agencies pursuant to voluntary agreements. The existing international transmission facilities to be utilized by HQUS have previously been authorized by Presidential permits issued pursuant to Executive Order 10485, as amended, and are appropriate for open access transmission by third parties.

**Procedural Matters:** Any person desiring to be heard in this proceeding should file a comment or protest to the application at the address provided above. Protests should be filed in accordance with Rule 211 of the Federal Energy Regulatory Commission's (FERC) Rules of Practice and Procedures (18 CFR 385.211). Any person desiring to become a party to these proceedings should file a motion to intervene at the above address in accordance with FERC Rule 214 (18 CFR 385.214). Five copies of such comments, protests, or motions to intervene should be sent to the address provided above on or before the date listed above.

Comments and other filings concerning HQUS's application to export electric energy to Canada should be clearly marked with OE Docket No. EA-182-D. An additional copy is to be provided directly to Jerry L. Pfeffer, Skadden, Arps, Slate, Meagher & Flom LLP, 1440 New York Avenue NW., Washington, DC 20005.

A final decision will be made on this application after the environmental impacts have been evaluated pursuant to DOE's National Environmental Policy

Act Implementing Procedures (10 CFR part 1021) and after a determination is made by DOE that the proposed action will not have an adverse impact on the sufficiency of supply or reliability of the U.S. electric power supply system.

Copies of this application will be made available, upon request, for public inspection and copying at the address provided above, by accessing the program Web site at <http://energy.gov/node/11845>, or by emailing Angela Troy at [Angela.Troy@hq.doe.gov](mailto:Angela.Troy@hq.doe.gov).

Issued in Washington, DC, on July 7, 2015.

**Christopher Lawrence,**

*Electricity Policy Analyst, Office of Electricity Delivery and Energy Reliability.*

[FR Doc. 2015-17069 Filed 7-10-15; 8:45 am]

**BILLING CODE 6450-01-P**

## DEPARTMENT OF ENERGY

### Federal Energy Regulatory Commission

[Project No. 2851-024]

### Cellu Tissue Corporation; Dunn Paper; Notice of Application for Transfer of License and Soliciting Comments, Motions to Intervene, and Protests

On June 18, 2015, Cellu Tissue Corporation (transferor) and Dunn Paper (transferee) filed an application for transfer of license of the Natural Dam Hydroelectric Project, FERC No. 2851. The project is located on the Oswegatchie River in St. Lawrence County, New York.

The applicants seek Commission approval to transfer the license for the Natural Dam Hydroelectric Project from the transferor to the transferee.

**Applicant Contact:** For Transferor: Mr. Jeremy Bartholomew, Cellu Tissue Corporation, 4921 Route 58N, Gouverneur, NY 13642, telephone: 315-287-7177. For Transferee: Mr. Greg Howe, Dunn Paper, 4921 Route 58N, Gouverneur, NY 13642, telephone: 315-287-7177.

**FERC Contact:** Patricia W. Gillis, (202) 502-8735.

Deadline for filing comments, motions to intervene, and protests: 15 days from the date that the Commission issues this notice. The Commission strongly encourages electronic filing. Please file motions to intervene, comments, and protests using the Commission's eFiling system at <http://www.ferc.gov/docs-filing/efiling.asp>. Commenters can submit brief comments up to 6,000 characters, without prior registration, using the eComment system at <http://www.ferc.gov/docs-filing/ecomment.asp>. You must include your



name and contact information at the end of your comments. For assistance, please contact FERC Online Support at [FERCOnlineSupport@ferc.gov](mailto:FERCOnlineSupport@ferc.gov), (866) 208-3676 (toll free), or (202) 502-8659 (TTY). In lieu of electronic filing, please send a paper copy to: Secretary, Federal Energy Regulatory Commission, 888 First Street NE., Washington, DC 20426. The first page of any filing should include docket number P-2851-024.

Dated: July 1, 2015..

**Kimberly D. Bose,**  
Secretary.

[FR Doc. 2015-16993 Filed 7-10-15; 8:45 am]

BILLING CODE 6717-01-P

## DEPARTMENT OF ENERGY

### Federal Energy Regulatory Commission

[Docket No. AD15-2-000]

#### Billing Procedures for Annual Charges For the Costs of Other Federal Agencies for Administering Part I of the Federal Power Act; Notice Reporting Costs for Other Federal Agencies' Administrative Annual Charges for Fiscal Year 2014

1. The Federal Energy Regulatory Commission (Commission) is required to determine the reasonableness of costs incurred by other Federal agencies (OFAs)<sup>1</sup> in connection with their participation in the Commission's proceedings under the Federal Power Act (FPA) Part I<sup>2</sup> when those agencies seek to include such costs in the administrative charges licensees must pay to reimburse the United States for the cost of administering Part I.<sup>3</sup> The Commission's *Order on Remand and Acting on Appeals of Annual Charge Bills*<sup>4</sup> determined which costs are eligible to be included in the administrative annual charges and it established a process for Commission review of future OFA cost submittals. This order established a process whereby the Commission would annually request each OFA to submit cost data, using a form<sup>5</sup> specifically designed for this purpose. In addition, the order established requirements for

detailed cost accounting reports and other documented analyses, which explain the cost assumptions contained in the OFAs' submissions.

2. The Commission has completed its review of the forms and supporting documentation submitted by the U.S. Department of the Interior (Interior), the U.S. Department of Agriculture (Agriculture), and the U.S. Department of Commerce (Commerce) for fiscal year 2014. This notice reports the costs the Commission included in its administrative annual charges for fiscal year 2015.

#### Scope of Eligible Costs

3. The basis for eligible costs that should be included in the OFAs' administrative annual charges is prescribed by the Office of Management and Budget's (OMB) Circular A-25—*User Charges* and the Federal Accounting Standards Advisory Board's Statement of Federal Financial Accounting Standards (SFFAS) Number 4—*Managerial Cost Accounting Concepts and Standards for the Federal Government*. Circular A-25 establishes Federal policy regarding fees assessed for government services and provides specific information on the scope and type of activities subject to user charges. SFFAS Number 4 provides a conceptual framework for federal agencies to determine the full costs of government goods and services.

4. Circular A-25 provides for user charges to be assessed against recipients of special benefits derived from federal activities beyond those received by the general public.<sup>6</sup> With regard to licensees, the special benefit derived from federal activities is the license to operate a hydropower project. The guidance provides for the assessment of sufficient user charges to recover the full costs of services associated with these special benefits.<sup>7</sup> SFFAS Number 4 defines full costs as the costs of resources consumed by a specific governmental unit that contribute directly or indirectly to a provided service.<sup>8</sup> Thus, pursuant to OMB requirements and authoritative accounting guidance, the Commission must base its OFA administrative

annual charge on all direct and indirect costs incurred by agencies in administering Part I of the FPA. The special form the Commission designed for this purpose, the "Other Federal Agency Cost Submission Form," captures the full range of costs recoverable under the FPA and the referenced accounting guidance.<sup>9</sup>

#### Commission Review of OFA Cost Submittals

5. The Commission received cost forms and other supporting documentation from the Departments of the Interior, Agriculture, and Commerce (OFAs). The Commission completed a review of each OFA's cost submission forms and supporting reports. In its examination of the OFAs' cost data, the Commission considered each agency's ability to demonstrate a system or process which effectively captured, isolated, and reported Part I costs as required by the "Other Federal Agency Cost Submission Form."

6. The Commission held a Technical Conference on March 26, 2015 to report its initial findings to licensees and OFAs. No OFA representatives attended the conference. Following the technical conference, licensees had the opportunity to submit comments<sup>10</sup> to the Commission regarding its initial review.

7. Written comments were filed by Idaho Falls Group (Idaho Falls). Idaho Falls generally supported the Commission's analysis but raised questions regarding certain various individual cost submissions. The Commission will address the issues in the Appendix to this notice.

8. After additional reviews, full consideration of the comments presented, and in accordance with the previously cited guidance, the Commission accepted as reasonable any costs reported via the cost submission forms that were clearly documented in the OFAs' accompanying reports and/or analyses. These documented costs will be included in the administrative annual charges for fiscal year 2015.

#### Summary of Reported & Accepted Costs for Fiscal Year 2014

<sup>1</sup> The OFAs include: The U.S. Department of the Interior (Bureau of Indian Affairs, Bureau of Land Management, Bureau of Reclamation, National Park Service, U.S. Fish and Wildlife Service, Office of the Solicitor, Office of Environmental Policy & Compliance, Office of Hearings and Appeals and Office of Policy Analysis); the U.S. Department of Agriculture (U.S. Forest Service); the U.S. Department of Commerce (National Marine

Fisheries Service); and the U.S. Army Corps of Engineers.

<sup>2</sup> 16 U.S.C. 794-823d (2006).

<sup>3</sup> See *id.* § 803(e)(1) and 42 U.S.C. 7178.

<sup>4</sup> 107 FERC ¶ 61,277, *order on reh'g*, 109 FERC ¶ 61,040 (2004).

<sup>5</sup> Other Federal Agency Cost Submission Form, available at <https://www.ferc.gov/docs-filing/forms.asp#ofa>.

<sup>6</sup> OMB Circular A-25 § 6.

<sup>7</sup> OMB Circular A-25 § 6. a. 2.

<sup>8</sup> SFFAS Number 4 ¶ 7.

<sup>9</sup> To avoid the possibility of confusion that has occurred in prior years as to whether costs were being entered twice as "Other Direct Costs" and "Overhead," the form excluded "Other Direct Costs."

<sup>10</sup> See Letter from Charles R. Sensiba, Van Ness Feldman, to the Honorable Kimberly D. Bose, FERC, Docket No. AD15-2-000 (filed May 11, 2015).

	Municipal		Non-Municipal		Total	
	Reported	Accepted	Reported	Accepted	Reported	Accepted
<b>Department of Interior</b>						
Bureau of Indian Affairs .....	143,046	143,046	216,666	216,666	359,713	359,713
Bureau of Land Management .....	98,020	96,140	1,494	2,212	99,514	98,352
Bureau of Reclamation .....	141	141	39,044	39,044	39,185	39,185
National Park Service .....	280,357	280,357	278,416	278,416	558,773	558,773
U.S. Fish and Wildlife Service .....	881,471	880,657	1,036,499	1,035,447	1,917,972	1,916,104
U.S. Geological Survey .....	.....	.....	.....	.....	—	—
Office of the Solicitor .....	13,599	13,599	111,186	108,414	124,785	122,013
Office of Environmental Policy & Compliance .....	55,825	55,825	132,834	132,834	188,658	188,658
Office of Hearings and Appeals .....	489	489	1,840	1,840	2,329	2,329
Office of Policy Analysis .....	.....	.....	9,646	9,646	9,646	9,646
<b>Department of Agriculture</b>						
U.S. Forest Service .....	493,060	378,925	1,550,580	1,594,016	2,043,640	1,572,941
<b>Department of Commerce</b>						
National Marine Fisheries Service .....	1,563,763	1,132,389	551,280	400,071	2,115,043	1,532,460
Total .....	3,529,771	2,981,588	3,929,485	3,418,606	7,459,258	6,400,174

Figure 1

9. Figure 1 summarizes the total reported costs incurred by Interior, Agriculture, and Commerce with respect to each OFA's participation in administering Part I of the FPA. Additionally, Figure 1 summarizes the reported costs that the Commission determined were clearly documented and accepted for inclusion in its FY 2015 administrative annual charges.

#### Summary Findings of Commission's Costs Review

10. As presented in the preceding table, the Commission determined that \$6,400,174 of the \$7,459,258 in total reported costs were determined to be reasonable and clearly documented in the OFAs' accompanying reports and/or analyses. Based on these findings, 14% of the total reported cost was determined to be unreasonable. The Commission noted the most significant issues with regard to the insufficiency of documentation provided by the OFAs was the lack of supporting documentation to substantiate costs reported on the "Other Federal Agency Cost Submission Form" as well as the inability to segregate Municipal and Non-Municipal costs.

11. The cost reports that the Commission determined were clearly documented and supported could be traced to detailed cost-accounting reports, which reconciled to data provided from agency financial systems or other pertinent source documentation. A further breakdown of these costs is included in the Appendix to this notice, along with an explanation

of how the Commission determined their reasonableness.

#### Points of Contact

12. If you have any questions regarding this notice, please contact Norman Richardson at (202) 502-6219 or Raven Rodriguez at (202) 502-6276.

Dated: July 7, 2015.

**Kimberly D. Bose,**

*Secretary.*

[FR Doc. 2015-17052 Filed 7-10-15; 8:45 am]

**BILLING CODE 6717-01-P**

#### DEPARTMENT OF ENERGY

#### Federal Energy Regulatory Commission

[Docket No. EL15-82-000]

#### Illinois Industrial Energy Consumers v. Midcontinent Independent System Operator, Inc.; Notice of Complaint

Take notice that on June 30, 2015, pursuant to Rule 206 of the Federal Energy Regulatory Commission's (Commission) Rules of Practice and Procedure, 18 CFR 385.206 and sections 206, 222, and 306 of the Federal Power Act (FPA), 16 U.S.C. 824(e), 824(v), and 825(e), Illinois Industrial Energy Consumers (Complainant) filed a formal complaint against Midcontinent Independent System Operator, Inc. (Respondent) asserting that Respondent's Open Access Transmission, Energy and Operating Reserves Market Tariff is unjust, unreasonable, and unduly discriminatory, in violation of the FPA,

as more fully explained in the complaint.

Any person desiring to intervene or to protest this filing must file in accordance with Rules 211 and 214 of the Commission's Rules of Practice and Procedure (18 CFR 385.211, 385.214). Protests will be considered by the Commission in determining the appropriate action to be taken, but will not serve to make protestants parties to the proceeding. Any person wishing to become a party must file a notice of intervention or motion to intervene, as appropriate. The Respondent's answer and all interventions, or protests must be filed on or before the comment date. The Respondent's answer, motions to intervene, and protests must be served on the Complainants.

The Commission encourages electronic submission of protests and interventions in lieu of paper using the "eFiling" link at <http://www.ferc.gov>. Persons unable to file electronically should submit an original and 5 copies of the protest or intervention to the Federal Energy Regulatory Commission, 888 First Street NE, Washington, DC 20426.

This filing is accessible on-line at <http://www.ferc.gov>, using the "eLibrary" link and is available for electronic review in the Commission's Public Reference Room in Washington, DC There is an "eSubscription" link on the Web site that enables subscribers to receive email notification when a document is added to a subscribed docket(s). For assistance with any FERC Online service, please email [FERCOnlineSupport@ferc.gov](mailto:FERCOnlineSupport@ferc.gov), or call

(866) 208-3676 (toll free). For TTY, call (202) 502-8659.

*Comment Date:* 5:00 p.m. Eastern Time on July 20, 2015.

*Dated:* July 1, 2015.

**Kimberly D. Bose,**  
*Secretary.*

[FR Doc. 2015-16991 Filed 7-10-15; 8:45 am]

**BILLING CODE 6717-01-P**

## DEPARTMENT OF ENERGY

### Federal Energy Regulatory Commission

[Docket No. EL15-81-000]

#### Bloom Energy Corporation; Notice of Petition for Declaratory Order

Take notice that on June 30, 2015, pursuant to rule 207(a) of the Federal Energy Regulatory Commission's (Commission) Rules of Practice and Procedure and sections 366.3(d) and 366.4(b)(3) of the Commission's regulations, 18 CFR 385.207(a), 366.3(d), and 366.4(b)(3), Bloom Energy Corporation (Bloom), filed a petition for declaratory order seeking a ruling that Bloom and certain of its subsidiaries are exempt from Commission regulation under the Public Utility Holding Company Act of 2005 as a result of their generation and sales to non-captive customers of electric energy generated from fuel cells using natural gas or renewable energy biogas as a fuel, all as more fully explained in the petition.

Any person desiring to intervene or to protest this filing must file in accordance with Rules 211 and 214 of the Commission's Rules of Practice and Procedure (18 CFR 385.211, 385.214). Protests will be considered by the Commission in determining the appropriate action to be taken, but will not serve to make protestants parties to the proceeding. Any person wishing to become a party must file a notice of intervention or motion to intervene, as appropriate. Such notices, motions, or protests must be filed on or before the comment date. Anyone filing a motion to intervene or protest must serve a copy of that document on the Petitioner.

The Commission encourages electronic submission of protests and interventions in lieu of paper using the "eFiling" link at <http://www.ferc.gov>. Persons unable to file electronically should submit an original and 5 copies of the protest or intervention to the Federal Energy Regulatory Commission, 888 First Street NE., Washington, DC 20426

This filing is accessible on-line at <http://www.ferc.gov>, using the

"eLibrary" link and is available for review in the Commission's Public Reference Room in Washington, DC. There is an "eSubscription" link on the Web site that enables subscribers to receive email notification when a document is added to a subscribed docket(s). For assistance with any FERC Online service, please email [FERCOnlineSupport@ferc.gov](mailto:FERCOnlineSupport@ferc.gov), or call (866) 208-3676 (toll free). For TTY, call (202) 502-8659.

*Comment Date:* 5:00 p.m. Eastern time on July 30, 2015.

*Dated:* July 2, 2015.

**Kimberly D. Bose,**  
*Secretary.*

[FR Doc. 2015-16996 Filed 7-10-15; 8:45 am]

**BILLING CODE 6717-01-P**

## DEPARTMENT OF ENERGY

### Federal Energy Regulatory Commission

#### Combined Notice of Filings #1

Take notice that the Commission received the following electric corporate filings:

*Docket Numbers:* EC15-162-000.

*Applicants:* ITC Midwest LLC.

*Description:* Application for Approval of Acquisition of Assets under Section 203 of ITC Midwest LLC.

*Filed Date:* 7/1/15.

*Accession Number:* 20150701-5361.

*Comments Due:* 5 p.m. ET 7/22/15.

*Docket Numbers:* EC15-163-000.

*Applicants:* SEP II, LLC.

*Description:* Section 203 Application for Authorization of Intracorporate Transfer of Jurisdictional Assets and Request for Expedited Action of SEP II, LLC.

*Filed Date:* 7/1/15.

*Accession Number:* 20150701-5367.

*Comments Due:* 5 p.m. ET 7/22/15.

Take notice that the Commission received the following electric rate filings:

*Docket Numbers:* ER10-1817-010; ER10-1819-011; ER10-1820-014; ER10-1818-009.

*Applicants:* Southwestern Public Service Company, Northern States Power Company, a Minnesota corporation, Northern States Power Company, a Wisconsin corporation, Public Service Company of Colorado.

*Description:* Triennial Market Power Analysis and Change in Status Report of Southwestern Public Service Company, et. al.

*Filed Date:* 6/30/15.

*Accession Number:* 20150630-5474.

*Comments Due:* 5 p.m. ET 8/31/15.

*Docket Numbers:* ER10-1936-005; ER10-2755-009; ER10-2739-011; ER10-2751-006.

*Applicants:* Carville Energy LLC, Las Vegas Power Company, LLC, LS Power Marketing, LLC, Renaissance Power, L.L.C.

*Description:* Updated Market Power Analysis for the Central Region of the LS Central MBR Sellers.

*Filed Date:* 6/30/15.

*Accession Number:* 20150630-5476.

*Comments Due:* 5 p.m. ET 8/31/15.

*Docket Numbers:* ER10-2074-005; ER10-2097-007.

*Applicants:* Kansas City Power & Light Company, KCP&L Greater Missouri Operations Company.

*Description:* Updated Market Power Analysis for Southwest Power Pool, Inc. Balancing Area Authority of Kansas City Power & Light Company, et. al.

*Filed Date:* 6/30/15.

*Accession Number:* 20150630-5471.

*Comments Due:* 5 p.m. ET 8/31/15.

*Docket Numbers:* ER10-2839-004.

*Applicants:* Midland Cogeneration Venture Limited Partnership.

*Description:* Updated Market Power Analysis of Midland Cogeneration Venture Limited Partnership.

*Filed Date:* 6/30/15.

*Accession Number:* 20150630-5469.

*Comments Due:* 5 p.m. ET 8/31/15.

*Docket Numbers:* ER10-2964-008.

*Applicants:* Selkirk Cogen Partners, L.P.

*Description:* Notice of Non-Material Change in Status of Selkirk Cogen Partners, L.P.

*Filed Date:* 7/1/15.

*Accession Number:* 20150701-5373.

*Comments Due:* 5 p.m. ET 7/22/15.

*Docket Numbers:* ER11-2489-006; ER12-726-005; ER12-2639-004; ER11-3620-008; ER11-2882-009; ER12-1431-006; ER12-1434-006; ER12-1432-006; ER12-1435-006; ER13-2102-004; ER14-1439-003; ER14-1656-005; ER15-1019-002; ER10-2628-003; ER11-3959-005.

*Applicants:* Hatchet Ridge Wind, LLC, Spring Valley Wind LLC, Ocotillo Express LLC, Lyonsdale Biomass, LLC, ReEnergy Sterling CT Limited Partnership, ReEnergy Ashland LLC, ReEnergy Fort Fairfield LLC, ReEnergy Livermore Falls LLC, ReEnergy Stratton LLC, ReEnergy Black River LLC, TrailStone Power, LLC, CSOLAR IV West, LLC, Fowler Ridge IV Wind Farm LLC, Lost Creek Wind, LLC, Post Rock Wind Power Project, LLC.

*Description:* Notification of change in status of the Riverstone MBR Entities.

*Filed Date:* 7/1/15.

*Accession Number:* 20150701-5374.

*Comments Due:* 5 p.m. ET 7/22/15.

*Docket Numbers:* ER14-1348-004; ER14-1349-004; ER10-3057-002; ER15-1687-002.

*Applicants:* The Dow Chemical Company, Union Carbide Corporation, Dow Pipeline Company, Blue Cube Operations LLC.

*Description:* Triennial Market Power Analysis for the Central Region of The Dow Chemical Company, et. al.

*Filed Date:* 6/30/15.

*Accession Number:* 20150630-5473.

*Comments Due:* 5 p.m. ET 8/31/15.

*Docket Numbers:* ER15-1510-001.

*Applicants:* FirstEnergy Solutions Corp.

*Description:* Tariff Amendment: Deficiency Filing to be effective 4/16/2015.

*Filed Date:* 7/2/15.

*Accession Number:* 20150702-5010.

*Comments Due:* 5 p.m. ET 7/23/15.

*Docket Numbers:* ER15-1919-001.

*Applicants:* California Independent System Operator Corporation.

*Description:* Tariff Amendment: 2015-07-01 Amendment to EIM Year One Tariff Record Effective Date to be effective 9/15/2015.

*Filed Date:* 7/1/15.

*Accession Number:* 20150701-5320.

*Comments Due:* 5 p.m. ET 7/22/15.

*Docket Numbers:* ER15-2090-000.

*Applicants:* New York State Electric & Gas Corporation.

*Description:* § 205(d) Rate Filing: NYSEG-NYPA Attachment C—O&M Annual Update to be effective 9/1/2015.

*Filed Date:* 7/1/15.

*Accession Number:* 20150701-5303.

*Comments Due:* 5 p.m. ET 7/22/15.

*Docket Numbers:* ER15-2091-000.

*Applicants:* New York State Electric & Gas Corporation.

*Description:* § 205(d) Rate Filing: Rate Schedule FERC No. 87 Supplement to be effective 9/1/2015.

*Filed Date:* 7/1/15.

*Accession Number:* 20150701-5317.

*Comments Due:* 5 p.m. ET 7/22/15.

*Docket Numbers:* ER15-2092-000.

*Applicants:* Southern California Edison Company.

*Description:* § 205(d) Rate Filing: Service Agreement with Ecos Energy Indian Canyon Solar Project GFID5524 to be effective 9/1/2015.

*Filed Date:* 7/2/15.

*Accession Number:* 20150702-5002.

*Comments Due:* 5 p.m. ET 7/23/15.

*Docket Numbers:* ER15-2093-000.

*Applicants:* Southern California Edison Company.

*Description:* § 205(d) Rate Filing: Service Agmt Ecos Energy for Little Morongo Solar GFID5523 to be effective 9/1/2015.

*Filed Date:* 7/2/15.

*Accession Number:* 20150702-5003.

*Comments Due:* 5 p.m. ET 7/23/15.

*Docket Numbers:* ER15-2094-000.

*Applicants:* Midcontinent

Independent System Operator, Inc.

*Description:* § 205(d) Rate Filing: 2015-07-02 SA 2810 MDU-OTP-MDU Ellendale T-TIA to be effective 6/12/2015.

*Filed Date:* 7/2/15.

*Accession Number:* 20150702-5067.

*Comments Due:* 5 p.m. ET 7/23/15.

*Docket Numbers:* ER15-2095-000.

*Applicants:* Midcontinent

Independent System Operator, Inc.

*Description:* § 205(d) Rate Filing: 2015-07-02 SA 2811 MDU-OTP-OTP Big Stone South T-TIA to be effective 6/12/2015.

*Filed Date:* 7/2/15.

*Accession Number:* 20150702-5069.

*Comments Due:* 5 p.m. ET 7/23/15.

*Docket Numbers:* ER15-2096-000.

*Applicants:* Midcontinent

Independent System Operator, Inc.

*Description:* § 205(d) Rate Filing: 2015-07-02 SA 1976 MEC-ITC Midwest 2nd Rev. TIA to be effective 6/17/2015.

*Filed Date:* 7/2/15.

*Accession Number:* 20150702-5079.

*Comments Due:* 5 p.m. ET 7/23/15.

*Docket Numbers:* ER15-2097-000.

*Applicants:* AEP Texas Central Company.

*Description:* § 205(d) Rate Filing: TCC-La Paloma Energy Center IA Second Amend & Restated to be effective 6/9/2015.

*Filed Date:* 7/2/15.

*Accession Number:* 20150702-5085.

*Comments Due:* 5 p.m. ET 7/23/15.

*Docket Numbers:* ER15-2098-000.

*Applicants:* AEP Texas North Company.

*Description:* § 205(d) Rate Filing: TNC-Duke Energy Renewables Solar I Interconnection Agreement to be effective 6/9/2015.

*Filed Date:* 7/2/15.

*Accession Number:* 20150702-5094.

*Comments Due:* 5 p.m. ET 7/23/15.

The filings are accessible in the Commission's eLibrary system by clicking on the links or querying the docket number.

Any person desiring to intervene or protest in any of the above proceedings must file in accordance with Rules 211 and 214 of the Commission's Regulations (18 CFR 385.211 and 385.214) on or before 5:00 p.m. Eastern time on the specified comment date. Protests may be considered, but intervention is necessary to become a party to the proceeding.

eFiling is encouraged. More detailed information relating to filing requirements, interventions, protests, service, and qualifying facilities filings can be found at: <http://www.ferc.gov/docs-filing/efiling/filing-req.pdf>. For other information, call (866) 208-3676 (toll free). For TTY, call (202) 502-8659.

Dated: July 2, 2015.

**Kimberly D. Bose,**

Secretary.

[FR Doc. 2015-16987 Filed 7-10-15; 8:45 am]

**BILLING CODE 6717-01-P**

## DEPARTMENT OF ENERGY

### Federal Energy Regulatory Commission

[Docket No. ER15-2101-000]

#### Golden West Power Partners, LLC; Supplemental Notice That Initial Market-Based Rate Filing Includes Request for Blanket Section 204 Authorization

This is a supplemental notice in the above-referenced proceeding of Golden West Power Partners, LLC's application for market-based rate authority, with an accompanying rate tariff, noting that such application includes a request for blanket authorization, under 18 CFR part 34, of future issuances of securities and assumptions of liability.

Any person desiring to intervene or to protest should file with the Federal Energy Regulatory Commission, 888 First Street, NE., Washington, DC 20426, in accordance with Rules 211 and 214 of the Commission's Rules of Practice and Procedure (18 CFR 385.211 and 385.214). Anyone filing a motion to intervene or protest must serve a copy of that document on the Applicant.

Notice is hereby given that the deadline for filing protests with regard to the applicant's request for blanket authorization, under 18 CFR part 34, of future issuances of securities and assumptions of liability, is July 27, 2015.

The Commission encourages electronic submission of protests and interventions in lieu of paper, using the FERC Online links at <http://www.ferc.gov>. To facilitate electronic service, persons with Internet access who will eFile a document and/or be listed as a contact for an intervenor must create and validate an eRegistration account using the eRegistration link. Select the eFiling link to log on and submit the intervention or protests.

Persons unable to file electronically should submit an original and 5 copies

of the intervention or protest to the Federal Energy Regulatory Commission, 888 First Street NE., Washington, DC 20426.

The filings in the above-referenced proceeding are accessible in the Commission's eLibrary system by clicking on the appropriate link in the above list. They are also available for electronic review in the Commission's Public Reference Room in Washington, DC. There is an eSubscription link on the Web site that enables subscribers to receive email notification when a document is added to a subscribed docket(s). For assistance with any FERC Online service, please email [FERCOnlineSupport@ferc.gov](mailto:FERCOnlineSupport@ferc.gov), or call (866) 208-3676 (toll free). For TTY, call (202) 502-8659.

Dated: July 7, 2015.

**Kimberly D. Bose,**  
Secretary.

[FR Doc. 2015-17049 Filed 7-10-15; 8:45 am]

BILLING CODE 6717-01-P

## DEPARTMENT OF ENERGY

### Federal Energy Regulatory Commission

[Project No. 4285-046]

#### City of Logan, Utah; Notice of Application Accepted for Filing, Ready for Environmental Analysis, Soliciting Comments, Motions to Intervene, Protests, Recommendations, Terms and Conditions, and Fishway Prescriptions

Take notice that the following hydroelectric application has been filed with the Commission and is available for public inspection:

a. *Type of Proceeding:* Amendment of License.

b. *Project No.:* 4285-046.

c. *Date Filed:* May 8, 2015.

d. *Licensee:* City of Logan, Utah.

e. *Name of Project:* Logan No. 2 Hydroelectric Project.

f. *Location:* The project is located on the Logan River, near the City of Logan, in Cache County, Utah. The project occupies federal lands administered by the Logan Ranger District, USDA Forest Service (USFS).

g. *Filed Pursuant to:* Federal Power Act, 16 U.S.C. 791a-825r.

h. *Licensee Contact:* City of Logan, Utah, Logan City Light and Power Department, 233 North Main Street, Logan, Utah 84321, Mark Montgomery at 435-716-9744 or Greg Clark at 208-906-7612.

i. *FERC Contact:* Mr. M Joseph Fayyad, (202) 502-8759, [mo.fayyad@ferc.gov](mailto:mo.fayyad@ferc.gov).

j. *Deadline for filing comments, motions to intervene, protests, recommendations, terms and conditions, and prescriptions:* 60 days from the issuance date of this notice; reply comments are due 105 days from the issuance date of this notice. The Commission strongly encourages electronic filing. Please file motions to intervene, protests and comments using the Commission's eFiling system at <http://www.ferc.gov/docs-filing/efiling.asp>. Commenters can submit brief comments up to 6,000 characters, without prior registration, using the eComment system at <http://www.ferc.gov/docs-filing/ecomment.asp>. You must include your name and contact information at the end of your comments. For assistance, please contact FERC Online Support at [FERCOnlineSupport@ferc.gov](mailto:FERCOnlineSupport@ferc.gov), (866) 208-3676 (toll free), or (202) 502-8659 (TTY). In lieu of electronic filing, please send a paper copy to: Secretary, Federal Energy Regulatory Commission, 888 First Street NE., Washington, DC 20426. The first page of any filing should include docket number P-4285-046.

k. *Description of Request:* Based upon an inspection of the dam and intake structure, the licensee proposes to replace or rehabilitate several portions of these structures. The proposed work will include: (1) Replacement of spillway crest gates with Obermeyer weirs; (2) Replacement of spillway abutment walls; (3) Armoring the abutments of the dam, which may consist of a combination of riprap and/or roller compacted concrete. (4) Replacement of the penstock isolation gate (Radial Gate) with an Obermeyer weir gate; (5) Replacement of trash rack at intake structure; (6) Replacement of the low level sluice gatehouse; (7) Rehabilitating the upstream face of dam; (8) Dredging of about 100,000 cubic yards of sediment from the reservoir; (9) refurbishment of the electrical generating equipment, which includes replacement of the existing runners, wicket gates, and associated parts which are damaged; and (10) recoating the interior and exterior of the steel portion of the penstock to reduce corrosion potential.

l. This filing may be viewed on the Commission's Web site at <http://www.ferc.gov/docs-filing/elibrary.asp>. Enter the docket number excluding the last three digits in the docket number field to access the document. You may also register online at <http://www.ferc.gov/docs-filing/esubscription.asp> to be notified via email of new filings and issuances related to this or other pending projects. For assistance, call 1-866-208-3676 or

email [FERCOnlineSupport@ferc.gov](mailto:FERCOnlineSupport@ferc.gov), for TTY, call (202) 502-8659. A copy is also available for inspection and reproduction in the Commission's Public Reference Room located at 888 First Street NE., Room 2A, Washington, DC 20426, or by calling (202) 502-8371.

m. Individuals desiring to be included on the Commission's mailing list should so indicate by writing to the Secretary of the Commission.

n. *Comments, Protests, or Motions to Intervene:* Anyone may submit comments, a protest, or a motion to intervene in accordance with the requirements of Rules of Practice and Procedure, 18 CFR 385.210, .211, and .214. In determining the appropriate action to take, the Commission will consider all protests or other comments filed, but only those who file a motion to intervene in accordance with the Commission's Rules may become a party to the proceeding. Any comments, protests, or motions to intervene must be received on or before the specified comment date for the particular application.

o. *Filing and Service of Responsive Documents:* Any filing must (1) bear in all capital letters the title "COMMENTS", "PROTEST", "MOTION TO INTERVENE", "REPLY COMMENTS", "RECOMMENDATIONS", "TERMS AND CONDITIONS", or "PRESCRIPTIONS", as applicable; (2) set forth in the heading the name of the applicant and the project number of the application to which the filing responds; (3) furnish the name, address, and telephone number of the person protesting or intervening; and (4) otherwise comply with the requirements of 18 CFR 385.2001 through 385.2005. All comments, motions to intervene, recommendations, terms and conditions, or prescriptions must set forth their evidentiary basis and otherwise comply with the requirements of 18 CFR 4.34(b), and should relate to project works which are the subject of the license amendment. Agencies may obtain copies of the application directly from the applicant. A copy of any protest or motion to intervene must be served upon each representative of the applicant specified in the particular application. If an intervenor files comments or documents with the Commission relating to the merits of an issue that may affect the responsibilities of a particular resource agency, they must also serve a copy of the document on that resource agency. A copy of all other filings in reference to this application must be accompanied by proof of service on all persons listed in the service list prepared by the

Commission in this proceeding, in accordance with 18 CFR 4.34(b) and 385.2010.

Dated: July 7, 2015.

**Kimberly D. Bose,**  
Secretary.

[FR Doc. 2015-17050 Filed 7-10-15; 8:45 am]

**BILLING CODE 6717-01-P**

## DEPARTMENT OF ENERGY

### Federal Energy Regulatory Commission

#### Combined Notice of Filings #2

Take notice that the Commission received the following electric rate filings:

*Docket Numbers:* ER15-2099-000.

*Applicants:* Duke Energy Carolinas, LLC.

*Description:* § 205(d) Rate Filing: City of Seneca NITSA Amendment SA No. 36 to be effective 7/1/2015.

*Filed Date:* 7/2/15.

*Accession Number:* 20150702-5147.

*Comments Due:* 5 p.m. ET 7/23/15.

*Docket Numbers:* ER15-2100-000.

*Applicants:* PJM Interconnection, L.L.C.

*Description:* § 205(d) Rate Filing: Talen ISA Update to be effective 6/2/2015.

*Filed Date:* 7/2/15.

*Accession Number:* 20150702-5200.

*Comments Due:* 5 p.m. ET 7/23/15.

*Docket Numbers:* ER15-2101-000.

*Applicants:* Golden West Power Partners, LLC.

*Description:* Baseline eTariff Filing: Golden West Power Partners, LLC Market-Based Rate Application to be effective 9/1/2015.

*Filed Date:* 7/2/15.

*Accession Number:* 20150702-5217.

*Comments Due:* 5 p.m. ET 7/23/15.

*Docket Numbers:* ER15-2102-000.

*Applicants:* New York Independent System Operator, Inc.

*Description:* § 205(d) Rate Filing: NYISO 205 filing on behalf of NYPA: NYPA Revised Transmission Revenue Rqrmnt to be effective 9/1/2015.

*Filed Date:* 7/2/15.

*Accession Number:* 20150702-5219.

*Comments Due:* 5 p.m. ET 7/23/15.

*Docket Numbers:* ER15-2103-000.

*Applicants:* Virginia Electric and Power Company.

*Description:* § 205(d) Rate Filing: Baseline Filing—Rate Schedule No. 114—NCEMPA to be effective 6/7/2015.

*Filed Date:* 7/2/15.

*Accession Number:* 20150702-5220.

*Comments Due:* 5 p.m. ET 7/23/15.

The filings are accessible in the Commission's eLibrary system by

clicking on the links or querying the docket number.

Any person desiring to intervene or protest in any of the above proceedings must file in accordance with Rules 211 and 214 of the Commission's Regulations (18 CFR 385.211 and 385.214) on or before 5:00 p.m. Eastern time on the specified comment date. Protests may be considered, but intervention is necessary to become a party to the proceeding.

eFiling is encouraged. More detailed information relating to filing requirements, interventions, protests, service, and qualifying facilities filings can be found at: <http://www.ferc.gov/docs-filing/efiling/filing-req.pdf>. For other information, call (866) 208-3676 (toll free). For TTY, call (202) 502-8659.

Dated: July 2, 2015.

**Kimberly D. Bose,**  
Secretary.

[FR Doc. 2015-16988 Filed 7-10-15; 8:45 am]

**BILLING CODE 6717-01-P**

## DEPARTMENT OF ENERGY

### Federal Energy Regulatory Commission

#### Combined Notice of Filings #1

Take notice that the Commission received the following electric corporate filings:

*Docket Numbers:* EC15-164-000.

*Applicants:* Alta Windpower Development, LLC, Cameron Ridge, LLC, Chandler Wind Partners, LLC, Coso Geothermal Power Holdings, LLC, Foote Creek II, LLC, Foote Creek III, LLC, Foote Creek IV, LLC, Oak Creek Wind Power, LLC, ON Wind Energy LLC, Pacific Crest Power, LLC, Ridge Crest Wind Partners, LLC, Ridgetop Energy, LLC, Sagebrush, a California partnership, Terra-Gen Dixie Valley, LLC, Terra-Gen Energy Services, LLC, TGP Energy Management, LLC, Victory Garden Phase IV, LLC, San Geronio West Winds II, LLC.

*Description:* Application for Authorization for Disposition of Jurisdictional Facilities and Request for Expedited Action of Alta Windpower Development, LLC, et. al.

*Filed Date:* 7/7/15.

*Accession Number:* 20150707-5118.

*Comments Due:* 5 p.m. ET 7/28/15.

Take notice that the Commission received the following electric rate filings:

*Docket Numbers:* ER13-107-009.

*Applicants:* South Carolina Electric & Gas Company.

*Description:* Compliance filing: Order 1000 Regional Compliance filing 7-6-15 to be effective 4/19/2013.

*Filed Date:* 7/6/15.

*Accession Number:* 20150706-5188.

*Comments Due:* 5 p.m. ET 7/27/15.

*Docket Numbers:* ER15-2113-000.

*Applicants:* Louisville Gas and Electric Company.

*Description:* § 205(d) Rate Filing: Att I Revision NITS Customers to be effective 7/8/2015.

*Filed Date:* 7/7/15.

*Accession Number:* 20150707-5075.

*Comments Due:* 5 p.m. ET 7/28/15.

*Docket Numbers:* ER15-2114-000.

*Applicants:* PJM Interconnection, L.L.C., Transource West Virginia, LLC.

*Description:* § 205(d) Rate Filing: Transource West Virginia submits Attachment H Formula Rate Template & Protocols to be effective 9/5/2015.

*Filed Date:* 7/7/15.

*Accession Number:* 20150707-5116.

*Comments Due:* 5 p.m. ET 7/28/15.

Take notice that the Commission received the following electric reliability filings:

*Docket Numbers:* RR15-2-002.

*Applicants:* North American Electric Reliability Corporation.

*Description:* Compliance Filing of the North American Electric Reliability Corporation and Petition for Approval of Rules of Procedure Revisions.

*Filed Date:* 7/6/15.

*Accession Number:* 20150706-5277.

*Comments Due:* 5 p.m. ET 7/27/15.

The filings are accessible in the Commission's eLibrary system by clicking on the links or querying the docket number.

Any person desiring to intervene or protest in any of the above proceedings must file in accordance with Rules 211 and 214 of the Commission's Regulations (18 CFR 385.211 and 385.214) on or before 5:00 p.m. Eastern time on the specified comment date. Protests may be considered, but intervention is necessary to become a party to the proceeding.

eFiling is encouraged. More detailed information relating to filing requirements, interventions, protests, service, and qualifying facilities filings can be found at: <http://www.ferc.gov/docs-filing/efiling/filing-req.pdf>. For other information, call (866) 208-3676 (toll free). For TTY, call (202) 502-8659.

Dated: July 7, 2015.

**Nathaniel J. Davis, Sr.,**  
Deputy Secretary.

[FR Doc. 2015-17013 Filed 7-10-15; 8:45 am]

**BILLING CODE 6717-01-P**

**DEPARTMENT OF ENERGY****Federal Energy Regulatory Commission**

[Project No. 2548–046]

**Northbrook Lyons Falls, LLC; Notice of Application Accepted for Filing, Soliciting Comments, Motions To Intervene, Protests, Recommendations, Terms and Conditions, and Prescriptions**

Take notice that the following hydroelectric application has been filed with the Commission and is available for public inspection:

a. *Type of Proceeding:* Amendment of License.

b. *Project No.:* 2548–046.

c. *Date Filed:* May 15, 2015.

d. *Licensee:* Northbrook Lyons Falls, LLC.

e. *Name of Project:* Lyons Falls Project.

f. *Location:* The 8.63-Megawatt (MW) Lyons Falls Project is located on the Moose and Black Rivers in Lewis County, New York.

g. *Filed Pursuant to:* Federal Power Act, 16 U.S.C. 791a–825r.

h. *Licensee Contact:* Mr. Dan Parker, Northbrook Lyons Falls, LLC, 37 Alfred A. Plourde Parkway, Suite 2, Lewiston, ME 04240, Telephone: (315) 261–2158, email: [daniel.parker@kniger.com](mailto:daniel.parker@kniger.com)

i. *FERC Contact:* Mr. M. Joseph Fayyad, (202) 502–8759, [mo.fayyad@ferc.gov](mailto:mo.fayyad@ferc.gov)

j. *Deadline for filing comments, motions to intervene, protests, recommendations, terms and conditions, and prescriptions:* 60 days from the issuance date of this notice; reply comments are due 105 days from the issuance date of this notice. The Commission strongly encourages electronic filing. Please file motions to intervene, protests and comments using the Commission's eFiling system at <http://www.ferc.gov/docs-filing/efiling.asp>. Commenters can submit brief comments up to 6,000 characters, without prior registration, using the eComment system at <http://www.ferc.gov/docs-filing/ecomment.asp>. You must include your name and contact information at the end of your comments. For assistance, please contact FERC Online Support at [FERCOnlineSupport@ferc.gov](mailto:FERCOnlineSupport@ferc.gov), (866) 208–3676 (toll free), or (202) 502–8659 (TTY). In lieu of electronic filing, please send a paper copy to: Secretary, Federal Energy Regulatory Commission, 888 First Street NE., Washington, DC 20426. The first page of any filing should include docket number P–2548–046.

k. *Description of Request:* The licensee proposes to increase the installed capacity at one of the project's developments, the existing 5.6 megawatt (MW) Lyons Falls Mill Development. The proposed work would consist of: (1) Demolishing the existing four-unit primary powerhouse and mothball the secondary single-unit powerhouse; (2) constructing a new 60 feet long, 45 feet wide, and 40 feet high, combined intake and trashrack structure adjacent to the river left dam abutment; (3) constructing two 11.5-foot-diameter, 75-foot-long steel penstocks; (4) constructing a new concrete and masonry powerhouse located along river left, largely in the footprint of the existing primary powerhouse, with two generating units. The proposed work at the Lyons Falls development would increase its installed capacity from 5.6 MW to 11.2 MW and its hydraulic capacity from 1170 cubic feet per second (cfs) to 2684 cfs.

The licensee provided documentation that on June 1, 2015, it has submitted a Joint Application for Permit to the New York State Department of Conservation (NYSDEC) in support of amending the Project's existing Section 401 Water Quality Certificate or issuing a new Water Quality Certificate for the Project.

l. This filing may be viewed on the Commission's Web site at <http://www.ferc.gov/docs-filing/elibrary.asp>. Enter the docket number excluding the last three digits in the docket number field to access the document. You may also register online at <http://www.ferc.gov/docs-filing/esubscription.asp> to be notified via email of new filings and issuances related to this or other pending projects. For assistance, call 1–866–208–3676 or email [FERCOnlineSupport@ferc.gov](mailto:FERCOnlineSupport@ferc.gov), for TTY, call (202) 502–8659. A copy is also available for inspection and reproduction in the Commission's Public Reference Room located at 888 First Street NE., Room 2A, Washington, DC 20426, or by calling (202) 502–8371.

m. Individuals desiring to be included on the Commission's mailing list should so indicate by writing to the Secretary of the Commission.

n. *Comments, Protests, or Motions to Intervene:* Anyone may submit comments, a protest, or a motion to intervene in accordance with the requirements of Rules of Practice and Procedure, 18 CFR 385.210, .211, .212 and .214. In determining the appropriate action to take, the Commission will consider all protests or other comments filed, but only those who file a motion to intervene in accordance with the Commission's Rules may become a party to the proceeding. Any comments,

protests, or motions to intervene must be received on or before the specified comment date for the particular application.

o. *Filing and Service of Responsive Documents:* Any filing must (1) bear in all capital letters the title “COMMENTS”, “PROTEST”, “MOTION TO INTERVENE”, “REPLY COMMENTS”, “RECOMMENDATIONS”, “TERMS AND CONDITIONS”, or “PRESCRIPTIONS”, as applicable; (2) set forth in the heading the name of the applicant and the project number of the application to which the filing responds; (3) furnish the name, address, and telephone number of the person protesting or intervening; and (4) otherwise comply with the requirements of 18 CFR 385.2001 through 385.2005. All comments, motions to intervene, recommendations, terms and conditions, or prescriptions must set forth their evidentiary basis and otherwise comply with the requirements of 18 CFR 4.34(b), and should relate to project works which are the subject of the license amendment. Agencies may obtain copies of the application directly from the applicant. A copy of any protest or motion to intervene must be served upon each representative of the applicant specified in the particular application. If an intervenor files comments or documents with the Commission relating to the merits of an issue that may affect the responsibilities of a particular resource agency, they must also serve a copy of the document on that resource agency. A copy of all other filings in reference to this application must be accompanied by proof of service on all persons listed in the service list prepared by the Commission in this proceeding, in accordance with 18 CFR 4.34(b) and 385.2010.

Dated: July 7, 2015.

**Kimberly D. Bose,**  
Secretary.

[FR Doc. 2015–17053 Filed 7–10–15; 8:45 am]

**BILLING CODE 6717–01–P**

**DEPARTMENT OF ENERGY****Federal Energy Regulatory Commission****Combined Notice Of Filings**

Take notice that the Commission has received the following Natural Gas Pipeline Rate and Refund Report filings:

*Docket Numbers:* RP15–101–000.

*Applicants:* Florida Gas Transmission Company, LLC.



*Description:* eTariff filing per 154.311: RP15–101 Updated Test Period Statements to be effective N/A.

*Filed Date:* 6/25/15.

*Accession Number:* 20150625–5085.

*Comments Due:* 5 p.m. ET 7/7/15.

*Docket Numbers:* RP15–1082–000.

*Applicants:* Gulf South Pipeline Company, LP.

*Description:* § 4(d) rate filing per 154.204: Negotiated Rate Agmt (Texla 20167) to be effective 6/25/2015.

*Filed Date:* 6/25/15.

*Accession Number:* 20150625–5064.

*Comments Due:* 5 p.m. ET 7/7/15.

Any person desiring to intervene or protest in any of the above proceedings must file in accordance with Rules 211 and 214 of the Commission's Regulations (18 CFR 385.211 and § 385.214) on or before 5:00 p.m. Eastern time on the specified comment date. Protests may be considered, but intervention is necessary to become a party to the proceeding.

#### Filings In Existing Proceedings

*Docket Numbers:* RP15–23–008.

*Applicants:* Transwestern Pipeline Company, LLC.

*Description:* Compliance filing per 154.203: RP15–23 Motion Interim Settlement Rates to be effective 7/1/2015.

*Filed Date:* 6/25/15.

*Accession Number:* 20150625–5087.

*Comments Due:* 5 p.m. ET 7/7/15.

The filings are accessible in the Commission's eLibrary system by clicking on the links or querying the docket number.

Any person desiring to intervene or protest in any of the above proceedings must file in accordance with Rules 211 and 214 of the Commission's Regulations (18 CFR 385.211 and § 385.214) on or before 5:00 p.m. Eastern time on the specified comment date. Protests may be considered, but intervention is necessary to become a party to the proceeding.

eFiling is encouraged. More detailed information relating to filing requirements, interventions, protests, service, and qualifying facilities filings can be found at: <http://www.ferc.gov/docs-filing/efiling/filing-req.pdf>. For other information, call (866) 208–3676 (toll free). For TTY, call (202) 502–8659.

Dated: June 26, 2015.

**Kimberly D. Bose,**  
Secretary.

[FR Doc. 2015–16990 Filed 7–10–15; 8:45 am]

BILLING CODE 6717–01–P

## DEPARTMENT OF ENERGY

### Federal Energy Regulatory Commission

[Docket Nos. CP15–521–000; PF13–4–000]

#### Gulf LNG Liquefaction Company, LLC, Gulf LNG Energy, LLC, Gulf LNG Pipeline LLC; Notice of Application

Take notice that on June 19, 2015, Gulf LNG Liquefaction Company, LLC (Gulf Liquefaction), Gulf LNG Energy, LLC (Gulf Energy), and Gulf LNG Pipeline LLC (Gulf Pipeline) (collectively, Applicants) 569 Brookwood Village, Suite 749, Birmingham, Alabama 35209, filed an application pursuant to section 3(a) of the Natural Gas Act (NGA) and Part 153 of the Commission's Regulations, requesting authorization to construct and operate the Gulf LNG Liquefaction Project (Project) at Gulf Energy's liquefied natural gas terminal located near Pascagoula, Jackson County, Mississippi. The Project consists of new natural gas liquefaction and export facilities. Additionally, within the same application, Gulf Pipeline filed pursuant to section 7(c) of the NGA and Part 157 of the Commission's Regulations to make modifications to the terminal's sendout pipeline to allow for bi-directional flow. The filing may be viewed on the web at <http://www.ferc.gov> using the "eLibrary" link. Enter the docket number excluding the last three digits in the docket number field to access the document. For assistance, contact FERC at [FERCOnlineSupport@ferc.gov](mailto:FERCOnlineSupport@ferc.gov) or call toll-free (886) 208–3676 or TTY (202) 502–8659.

Any questions regarding this application should be directed to Glenn A. Sheffield, Director of Rates and Regulatory Affairs, Gulf LNG Liquefaction Company, LLC, 569 Brookwood Village, Suite 749, Birmingham, Alabama 35209, telephone (205) 325–3813, or email [glenn\\_sheffield@kindermorgan.com](mailto:glenn_sheffield@kindermorgan.com); or Tina S. Hardy, Manager IC-Regulatory, telephone (205) 325–3668, or email [tina\\_hardy@kindermorgan.com](mailto:tina_hardy@kindermorgan.com).

Specifically, Gulf Liquefaction proposes under section 3 to construct two 5 million ton per annum liquefaction trains, pretreatment, ancillary and support facilities, two marine off loading facilities, and an extension of the storm surge protection facilities. These facilities will enable Gulf Liquefaction to liquefy and export up to 1.5 billion cubic feet of natural gas per day. Gulf Energy proposes under section 3 to make modifications to their terminal to accommodate Gulf

Liquefaction's operations and Gulf Pipeline proposes interconnect modifications under section 7 to allow bi-directional flow of natural gas to the terminal.

On May 21, 2014, the Commission staff granted the Applicants' request to use the National Environmental Policy Act (NEPA) Pre-Filing Process and assigned Docket No. PF13–4–000 to staff activities involving the proposed facilities. Now, as of the filing of this application on June 19, 2015, the NEPA Pre-Filing Process for this project has ended. From this time forward, this proceeding will be conducted in Docket No. CP15–521–000, as noted in the caption of this Notice.

Pursuant to section 157.9 of the Commission's rules, 18 CFR 157.9, within 90 days of this Notice the Commission staff will either: complete its environmental assessment (EA) and place it into the Commission's public record (eLibrary) for this proceeding, or issue a Notice of Schedule for Environmental Review. If a Notice of Schedule for Environmental Review is issued, it will indicate, among other milestones, the anticipated date for the Commission staff's issuance of the final environmental impact statement (FEIS) or EA for this proposal. The filing of the EA in the Commission's public record for this proceeding or the issuance of a Notice of Schedule will serve to notify federal and state agencies of the timing for the completion of all necessary reviews, and the subsequent need to complete all federal authorizations within 90 days of the date of issuance of the Commission staff's FEIS or EA.

There are two ways to become involved in the Commission's review of this project. First, any person wishing to obtain legal status by becoming a party to the proceedings for this project should, on or before the comment date stated below, file with the Federal Energy Regulatory Commission, 888 First Street NE., Washington, DC 20426, a motion to intervene in accordance with the requirements of the Commission's Rules of Practice and Procedure (18 CFR 385.214 or 385.211) and the Regulations under the NGA (18 CFR 157.10). A person obtaining party status will be placed on the service list maintained by the Secretary of the Commission and will receive copies of all documents filed by the applicant and by all other parties. A party must submit 5 copies of filings made with the Commission and must mail a copy to the applicant and to every other party in the proceeding. Only parties to the proceeding can ask for court review of Commission orders in the proceeding.



However, a person does not have to intervene in order to have comments considered. The second way to participate is by filing with the Secretary of the Commission, as soon as possible, an original and two copies of comments in support of or in opposition to this project. The Commission will consider these comments in determining the appropriate action to be taken, but the filing of a comment alone will not serve to make the filer a party to the proceeding. The Commission's rules require that persons filing comments in opposition to the project provide copies of their protests only to the party or parties directly involved in the protest.

Persons who wish to comment only on the environmental review of this project should submit an original and two copies of their comments to the Secretary of the Commission. Environmental commenters will be placed on the Commission's environmental mailing list, will receive copies of the environmental documents, and will be notified of meetings associated with the Commission's environmental review process. Environmental commenters will not be required to serve copies of filed documents on all other parties. However, the non-party commenters will not receive copies of all documents filed by other parties or issued by the Commission (except for the mailing of environmental documents issued by the Commission) and will not have the right to seek court review of the Commission's final order.

Motions to intervene, protests and comments may be filed electronically via the internet in lieu of paper; see, 18 CFR 385.2001(a) (1) (iii) and the instructions on the Commission's Web site under the "e-Filing" link. The Commission strongly encourages electronic filings.

*Comment Date:* July 22, 2015.

*Dated:* July 1, 2015.

**Kimberly D. Bose,**

*Secretary.*

[FR Doc. 2015-16999 Filed 7-10-15; 8:45 am]

**BILLING CODE 6717-01P**

## DEPARTMENT OF ENERGY

### Federal Energy Regulatory Commission

[Docket No. PF15-23-000]

#### **Millennium Pipeline Company, LLC; Notice of Intent To Prepare an Environmental Assessment for the Planned Valley Lateral Project, and Request for Comments on Environmental Issues**

The staff of the Federal Energy Regulatory Commission (FERC or Commission) will prepare an environmental assessment (EA) that will discuss the environmental impacts of the Valley Lateral Project involving construction and operation of facilities by Millennium Pipeline Company, LLC (Millennium) in Orange County, New York. The Commission will use this EA in its decision-making process to determine whether the project is in the public convenience and necessity.

This notice announces the opening of the scoping process the Commission will use to gather input from the public and interested agencies on the project. You can make a difference by providing us with your specific comments or concerns about the project. Your comments should focus on the potential environmental effects, reasonable alternatives, and measures to avoid or lessen environmental impacts. Your input will help the Commission staff determine what issues they need to evaluate in the EA. To ensure that your comments are timely and properly recorded, please send your comments so that the Commission receives them in Washington, DC on or before August 5, 2015.

If you sent comments on this project to the Commission before the opening of this docket on April 30, 2015, you will need to file those comments in Docket No. PF15-23-000 to ensure they are considered as part of this proceeding.

This notice is being sent to the Commission's current environmental mailing list for this project. State and local government representatives should notify their constituents of this planned project and encourage them to comment on their areas of concern.

If you are a landowner receiving this notice, a pipeline company representative may contact you about the acquisition of an easement to construct, operate, and maintain the planned facilities. The company would seek to negotiate a mutually acceptable agreement. However, if the Commission approves the project, that approval conveys with it the right of eminent domain. Therefore, if easement

negotiations fail to produce an agreement, the pipeline company could initiate condemnation proceedings where compensation would be determined in accordance with state law.

A fact sheet prepared by the FERC entitled "An Interstate Natural Gas Facility On My Land? What Do I Need To Know?" is available for viewing on the FERC Web site ([www.ferc.gov](http://www.ferc.gov)). This fact sheet addresses a number of typically asked questions, including the use of eminent domain and how to participate in the Commission's proceedings.

### Public Participation

For your convenience, there are three methods you can use to submit your comments to the Commission. The Commission encourages electronic filing of comments and has expert staff available to assist you at (202) 502-8258 or [efiling@ferc.gov](mailto:efiling@ferc.gov). Please carefully follow these instructions so that your comments are properly recorded.

(1) You can file your comments electronically using the *eComment* feature on the Commission's Web site ([www.ferc.gov](http://www.ferc.gov)) under the link to *Documents and Filings*. This is an easy method for submitting brief, text-only comments on a project;

(2) You can file your comments electronically by using the *eFiling* feature on the Commission's Web site ([www.ferc.gov](http://www.ferc.gov)) under the link to *Documents and Filings*. With eFiling, you can provide comments in a variety of formats by attaching them as a file with your submission. New eFiling users must first create an account by clicking on "eRegister." If you are filing a comment on a particular project, please select "Comment on a Filing" as the filing type; or

(3) You can file a paper copy of your comments by mailing them to the following address. Be sure to reference the project docket number (PF15-23-000) with your submission: Kimberly D. Bose, Secretary, Federal Energy Regulatory Commission, 888 First Street NE., Room 1A, Washington, DC 20426.

### Summary of the Planned Project

Millennium plans to construct and operate approximately 7.8 miles of new pipeline lateral in Orange County, New York. The planned pipeline lateral would provide about 130 million cubic feet per day of natural gas per day to the Competitive Power Ventures (CPV) Valley Energy Center in the Town of Wawayanda, New York from Millennium's existing mainline pipeline. According to Millennium, the Valley Lateral Project would supply

natural gas for generation of up to 650 megawatts of power at the CPV Valley Energy Center (in development).

The planned Valley Lateral Project would consist of the following facilities:

- 7.8 miles of pipeline lateral originating at Millennium's existing mainline that would deliver gas to the CPV Valley Energy Center;
- a pig<sup>1</sup> launcher at the pipeline origin located wholly within the permanent pipeline right-of-way; and
- a pig receiver and metering facilities at the pipeline terminus and located entirely within the area to be developed for the CPV Valley Energy Center.

The general location of the project facilities is shown in appendix 1.<sup>2</sup>

### Land Requirements for Construction

Construction of the planned pipeline lateral facilities would occur within a 75- to 135-foot right-of-way. Following construction, Millennium would maintain a 50-foot right-of-way for permanent operation of the project's facilities; the remaining acreage would be restored and revert to former uses. About 24 percent of the planned pipeline route parallels existing pipeline, utility, or road rights-of-way.

### The EA Process

The National Environmental Policy Act (NEPA) requires the Commission to take into account the environmental impacts that could result from an action whenever it considers the issuance of a Certificate of Public Convenience and Necessity. NEPA also requires us<sup>3</sup> to discover and address concerns the public may have about proposals. This process is referred to as scoping. The main goal of the scoping process is to focus the analysis in the EA on the important environmental issues. By this notice, the Commission requests public comments on the scope of the issues to address in the EA. We will consider all filed comments during the preparation of the EA.

In the EA we will discuss impacts that could occur as a result of the construction and operation of the

planned project under these general headings:

- geology and soils;
- land use;
- water resources, fisheries, and wetlands;
- cultural resources;
- vegetation and wildlife;
- air quality and noise;
- endangered and threatened species;
- public safety; and
- cumulative impacts.

We will also evaluate possible alternatives to the planned project or portions of the project, and make recommendations on how to lessen or avoid impacts on the various resource areas.

Although no formal application has been filed, we have already initiated our NEPA review under the Commission's pre-filing process. The purpose of the pre-filing process is to encourage early involvement of interested stakeholders and to identify and resolve issues before the FERC receives an application. As part of our pre-filing review, we have begun to contact some federal and state agencies to discuss their involvement in the scoping process and the preparation of the EA.

The EA will present our independent analysis of the issues. The EA will be available in the public record through eLibrary. We will also publish and distribute the EA to the public for an allotted comment period. We will consider all comments on the EA before we make our recommendations to the Commission. To ensure we have the opportunity to consider and address your comments, please carefully follow the instructions in the Public Participation section, beginning on page 2.

With this notice, we are asking agencies with jurisdiction by law and/or special expertise with respect to the environmental issues related to this project to formally cooperate with us in the preparation of the EA.<sup>4</sup> Agencies that would like to request cooperating agency status should follow the instructions for filing comments provided under the Public Participation section of this notice.

### Consultations Under Section 106 of the National Historic Preservation Act

In accordance with the Advisory Council on Historic Preservation's implementing regulations for section 106 of the National Historic Preservation Act, we are using this

notice to initiate consultation with the applicable State Historic Preservation Office, and to solicit their views and those of other government agencies, interested Indian tribes, and the public on the project's potential effects on historic properties.<sup>5</sup> We will define the project-specific Area of Potential Effects (APE) in consultation with the SHPO as the project develops. On natural gas facility projects, the APE at a minimum encompasses all areas subject to ground disturbance (examples include construction right-of-way, contractor/pipe storage yards, compressor stations, and access roads). Our EA for this project will document our findings on the impacts on historic properties and summarize the status of consultations under section 106.

### Environmental Mailing List

The environmental mailing list includes federal, state, and local government representatives and agencies; elected officials; environmental and public interest groups; Native American Tribes; other interested parties; and local libraries and newspapers. This list also includes all affected landowners (as defined in the Commission's regulations) who are potential right-of-way grantors, whose property may be used temporarily for project purposes, or who own homes within certain distances of aboveground facilities, and anyone who submits comments on the project. We will update the environmental mailing list as the analysis proceeds to ensure that we send the information related to this environmental review to all individuals, organizations, and government entities interested in and/or potentially affected by the planned project.

Copies of the EA will be sent to the environmental mailing list for public review and comment. If you would prefer to receive a paper copy of the document instead of the CD version or would like to remove your name from the mailing list, please return the attached Information Request (appendix 2).

### Becoming an Intervenor

Once Millennium files its application with the Commission, you may want to become an "intervenor" which is an official party to the Commission's proceeding. Intervenor play a more formal role in the process and are able

<sup>1</sup> A "pig" is a tool that the pipeline company inserts into and pushes through the pipeline for cleaning the pipeline, conducting internal inspections, or other purposes.

<sup>2</sup> The appendices referenced in this notice will not appear in the **Federal Register**. Copies of the appendices were sent to all those receiving this notice in the mail and are available at [www.ferc.gov](http://www.ferc.gov) using the link called "eLibrary" or from the Commission's Public Reference Room, 888 First Street NE., Washington, DC 20426, or call (202) 502-8371. For instructions on connecting to eLibrary, refer to the last page of this notice.

<sup>3</sup> "We," "us," and "our" refer to the environmental staff of the Commission's Office of Energy Projects.

<sup>4</sup> The Council on Environmental Quality regulations addressing cooperating agency responsibilities are at Title 40, Code of Federal Regulations, Part 1501.6.

<sup>5</sup> The Advisory Council on Historic Preservation regulations are at Title 36, Code of Federal Regulations, Part 800. Those regulations define historic properties as any prehistoric or historic district, site, building, structure, or object included in or eligible for inclusion in the National Register of Historic Places.

to file briefs, appear at hearings, and be heard by the courts if they choose to appeal the Commission's final ruling. An intervenor formally participates in the proceeding by filing a request to intervene. Instructions for becoming an intervenor are in the User's Guide under the "e-filing" link on the Commission's Web site. Please note that the Commission will not accept requests for intervenor status at this time. You must wait until the Commission receives a formal application for the project.

#### Additional Information

Additional information about the project is available from the Commission's Office of External Affairs, at (866) 208-FERC, or on the FERC Web site ([www.ferc.gov](http://www.ferc.gov)) using the eLibrary link. Click on the eLibrary link, click on "General Search" and enter the docket number, excluding the last three digits in the Docket Number field (*i.e.*, PF15-23). Be sure you have selected an appropriate date range. For assistance, please contact FERC Online Support at [FercOnlineSupport@ferc.gov](mailto:FercOnlineSupport@ferc.gov) or toll free at (866) 208-3676, or for TTY, contact (202) 502-8659. The eLibrary link also provides access to the texts of formal documents issued by the Commission, such as orders, notices, and rulemakings.

In addition, the Commission offers a free service called eSubscription which allows you to keep track of all formal issuances and submittals in specific dockets. This can reduce the amount of time you spend researching proceedings by automatically providing you with notification of these filings, document summaries, and direct links to the documents. Go to [www.ferc.gov/docs-filing/esubscription.asp](http://www.ferc.gov/docs-filing/esubscription.asp).

Finally, public meetings or site visits will be posted on the Commission's calendar located at [www.ferc.gov/EventCalendar/EventsList.aspx](http://www.ferc.gov/EventCalendar/EventsList.aspx) along with other related information.

Dated: July 6, 2015.

**Kimberly D. Bose,**  
Secretary.

[FR Doc. 2015-16998 Filed 7-10-15; 8:45 am]

BILLING CODE 6717-01-P

## DEPARTMENT OF ENERGY

### Federal Energy Regulatory Commission

#### Combined Notice Of Filings

Take notice that the Commission has received the following Natural Gas Pipeline Rate and Refund Report filings:

*Docket Numbers:* RP15-1077-000.

*Applicants:* Texas Gas Transmission, LLC.

*Description:* § 4(d) rate filing per 154.204: Remove References to Expired Operating Lease to be effective 4/1/2015.

*Filed Date:* 6/24/15.

*Accession Number:* 20150624-5059.

*Comments Due:* 5 p.m. ET 7/6/15.

*Docket Numbers:* RP15-1078-000.

*Applicants:* Barclays Bank PLC.

*Description:* Petition for Temporary Waiver of Commission Capacity Release Regulations and Related Tariff Provisions and Request for Expedited Action of Barclays Bank PLC under RP15-1078.

*Filed Date:* 6/24/15.

*Accession Number:* 20150624-5160.

*Comments Due:* 5 p.m. ET 7/1/15.

*Docket Numbers:* RP15-1079-000.

*Applicants:* Algonquin Gas Transmission, LLC.

*Description:* § 4(d) rate filing per 154.204: BBPC 2015-07-01 Releases to EDF Trading to be effective 7/1/2015.

*Filed Date:* 6/25/15.

*Accession Number:* 20150625-5022.

*Comments Due:* 5 p.m. ET 7/7/15.

*Docket Numbers:* RP15-1080-000.

*Applicants:* Northern Natural Gas Company.

*Description:* § 4(d) rate filing per 154.204: 20150625 Negotiated Rate to be effective 7/1/2015.

*Filed Date:* 6/25/15.

*Accession Number:* 20150625-5025.

*Comments Due:* 5 p.m. ET 7/7/15.

*Docket Numbers:* RP15-1081-000.

*Applicants:* Kern River Gas Transmission Company.

*Description:* § 4(d) rate filing per 154.204: 2015 Enserco to Twin Eagle to be effective 7/1/2015.

*Filed Date:* 6/25/15.

*Accession Number:* 20150625-5034.

*Comments Due:* 5 p.m. ET 7/7/15.

The filings are accessible in the Commission's eLibrary system by clicking on the links or querying the docket number.

Any person desiring to intervene or protest in any of the above proceedings must file in accordance with Rules 211 and 214 of the Commission's Regulations (18 CFR 385.211 and § 385.214) on or before 5:00 p.m. Eastern time on the specified comment date. Protests may be considered, but intervention is necessary to become a party to the proceeding.

eFiling is encouraged. More detailed information relating to filing requirements, interventions, protests, service, and qualifying facilities filings can be found at: <http://www.ferc.gov/docs-filing/efiling/filing-req.pdf>. For other information, call (866) 208-3676 (toll free). For TTY, call (202) 502-8659.

Dated: June 25, 2015.

**Kimberly D. Bose,**  
Secretary.

[FR Doc. 2015-16989 Filed 7-10-15; 8:45 am]

BILLING CODE 6717-01-P

## DEPARTMENT OF ENERGY

### Federal Energy Regulatory Commission

[Docket No. CP15-499-000]

#### Texas Eastern Transmission, LP; Notice of Intent to Prepare An Environmental Assessment for the Proposed South Texas Expansion Project, And Request for Comments on Environmental Issues

The staff of the Federal Energy Regulatory Commission (FERC or Commission) will prepare an environmental assessment (EA) that will discuss the environmental impacts of the South Texas Expansion Project (Project) involving construction and operation of facilities by Texas Eastern Transmission, LP (Texas Eastern) in Nueces, Matagorda, Brazoria, Chambers, and Orange Counties, Texas. The Commission will use this EA in its decision-making process to determine whether the project is in the public convenience and necessity.

This notice announces the opening of the scoping process the Commission will use to gather input from the public and interested agencies on the Project. You can make a difference by providing us with your specific comments or concerns about the Project. Your comments should focus on the potential environmental effects, reasonable alternatives, and measures to avoid or lessen environmental impacts. Your input will help the Commission staff determine what issues they need to evaluate in the EA. To ensure that your comments are timely and properly recorded, please send your comments so that the Commission receives them in Washington, DC on or before July 30, 2015.

If you sent comments on this project to the Commission before the opening of this docket on May 22, 2015, you will need to file those comments in Docket No. CP15-499-000 to ensure they are considered as part of this proceeding.

This notice is being sent to the Commission's current environmental mailing list for this Project. State and local government representatives should notify their constituents of this proposed project and encourage them to comment on their areas of concern.

If you are a landowner receiving this notice, a Texas Eastern representative

may contact you about the acquisition of an easement to construct, operate, and maintain the proposed facilities. The company would seek to negotiate a mutually acceptable agreement.

However, if the Commission approves the Project, that approval conveys with it the right of eminent domain.

Therefore, if easement negotiations fail to produce an agreement, the pipeline company could initiate condemnation proceedings where compensation would be determined in accordance with state law.

Texas Eastern provided landowners with a fact sheet prepared by the FERC entitled "An Interstate Natural Gas Facility On My Land? What Do I Need To Know?" This fact sheet addresses a number of typically asked questions, including the use of eminent domain and how to participate in the Commission's proceedings. It is also available for viewing on the FERC Web site ([www.ferc.gov](http://www.ferc.gov)).

### Public Participation

For your convenience, there are three methods you can use to submit your comments to the Commission. The Commission encourages electronic filing of comments and has expert staff available to assist you at (202) 502-8258 or [efiling@ferc.gov](mailto:efiling@ferc.gov). Please carefully follow these instructions so that your comments are properly recorded.

(1) You can file your comments electronically using the eComment feature on the Commission's Web site ([www.ferc.gov](http://www.ferc.gov)) under the link to Documents and Filings. This is an easy method for submitting brief, text-only comments on a project;

(2) You can file your comments electronically by using the eFiling feature on the Commission's Web site ([www.ferc.gov](http://www.ferc.gov)) under the link to Documents and Filings. With eFiling, you can provide comments in a variety of formats by attaching them as a file with your submission. New eFiling users must first create an account by clicking on "eRegister." If you are filing a comment on a particular project, please select "Comment on a Filing" as the filing type; or

(3) You can file a paper copy of your comments by mailing them to the following address. Be sure to reference the Project docket number (CP15-499-000) with your submission: Kimberly D. Bose, Secretary, Federal Energy Regulatory Commission, 888 First Street NE., Room 1A, Washington, DC 20426.

### Summary of the Proposed Project

Texas Eastern proposes to construct and operate pipeline and compression facilities in Nueces, Matagorda,

Brazoria, Chambers, and Orange Counties, Texas. The Project would provide about 400,000 dekatherms of natural gas per day. According to Texas Eastern, its Project would provide service to a customer by increasing flow in its system to South Texas.

The Project would consist of the following facilities:

- installation of an 8,400 horsepower (hp) compressor and a meter and regulating station at the existing Petronila Station in Nueces County, Texas;
- installation of an 8,400 hp compressor unit and piping modifications at the existing Blessing Compressor Station in Matagorda County, Texas;
- modification to piping and other compression facilities at the Mont Belvieu Compressor Station in Chambers County, Texas, Vidor Compressor Station in Orange County, Texas, and Angleton Compressor Station in Brazoria County, Texas; and
- modification to piping at existing launcher and receiver sites along Texas Eastern's Line 16 in Brazoria, Chambers, and Orange Counties, Texas.

The general location of the Project facilities is shown in appendix 1.<sup>1</sup>

### Land Requirements for Construction

Construction of the proposed facilities would disturb about 122 acres of land for the aboveground facilities and the pipeline. Following construction Texas Eastern would maintain 31 acres for permanent operation of the Project's facilities; the remaining acreage would be restored and revert to former uses. Changes to existing facilities would be accomplished within the existing facilities' fence lines.

### The EA Process

The National Environmental Policy Act (NEPA) requires the Commission to take

into account the environmental impacts that could result from an action whenever it considers the issuance of a Certificate of Public Convenience and Necessity. The NEPA also requires us<sup>2</sup> to discover and address concerns the public may have about proposals. This process is referred to as "scoping." The

<sup>1</sup> The appendices referenced in this notice will not appear in the **Federal Register**. Copies of appendices were sent to all those receiving this notice in the mail and are available at [www.ferc.gov](http://www.ferc.gov) using the link called "eLibrary" or from the Commission's Public Reference Room, 888 First Street NE., Washington, DC 20426, or call (202) 502-8371. For instructions on connecting to eLibrary, refer to the last page of this notice.

<sup>2</sup> "We," "us," and "our" refer to the environmental staff of the Commission's Office of Energy Projects.

main goal of the scoping process is to focus the analysis in the EA on the important environmental issues. By this notice, the Commission requests public comments on the scope of the issues to address in the EA. We will consider all filed comments during the preparation of the EA.

In the EA we will discuss impacts that could occur as a result of the construction and operation of the proposed project under these general headings:

- geology and soils;
- land use;
- water resources, fisheries, and wetlands;
- cultural resources;
- vegetation and wildlife;
- air quality and noise;
- endangered and threatened species;
- public safety; and
- cumulative impacts

We will also evaluate reasonable alternatives to the proposed Project or portions of the Project, and make recommendations on how to lessen or avoid impacts on the various resource areas.

The EA will present our independent analysis of the issues. The EA will be available in the public record through eLibrary. We will consider all comments on the EA before making our recommendations to the Commission. To ensure we have the opportunity to consider and address your comments, please carefully follow the instructions in the Public Participation section of this notice.

With this notice, we are asking agencies with jurisdiction by law and/or special expertise with respect to the environmental issues of this project to formally cooperate

with us in the preparation of the EA.<sup>3</sup> Agencies that would like to request cooperating agency status should follow the instructions for filing comments provided under the Public Participation section of this notice.

### Consultations Under Section 106 of the National Historic Preservation Act

In accordance with the Advisory Council on Historic Preservation's implementing regulations for section 106 of the National Historic Preservation Act, we are using this notice to initiate consultations with the Texas State Historic Preservation Office (SHPO), and to solicit its views and those of other government agencies, interested Indian tribes, and the public

<sup>3</sup> The Council on Environmental Quality regulations addressing cooperating agency responsibilities are at Title 40, Code of Federal Regulations, Part 1501.6.

on the Project's potential effects on historic properties.<sup>4</sup> We will define the Project-specific Area of Potential Effects (APE) in consultation with the SHPO as the Project develops. On natural gas facility projects, the APE at a minimum encompasses all areas subject to ground disturbance (examples include construction right-of-way, contractor/pipe storage yards, compressor stations, and access roads). Our EA for this Project will document our findings on the impacts on historic properties and summarize the status of consultations under section 106.

#### Environmental Mailing List

The environmental mailing list includes federal, state, and local government representatives and agencies; elected officials; environmental and public interest groups; Indian tribes; other interested parties; and local libraries and newspapers. This list also includes all affected landowners (as defined in the Commission's regulations) who are potential right-of-way grantors, whose property may be used temporarily for project purposes, or who own homes within certain distances of aboveground facilities, and anyone who submits comments on the project. We will update the environmental mailing list as the analysis proceeds to ensure that we send the information related to this environmental review to all individuals, organizations, and government entities interested in and/or potentially affected by the proposed Project.

If we publish and distribute the EA, copies of the EA will be sent to the environmental mailing list for public review and comment. If you would prefer to receive a paper copy of the document instead of the CD version or would like to remove your name from the mailing list, please return the attached Information Request (appendix 2).

#### Becoming an Intervenor

In addition to involvement in the EA scoping process, you may want to become an "intervenor" which is an official party to the Commission's proceeding. Intervenor play a more formal role in the process and are able to file briefs, appear at hearings, and be heard by the courts if they choose to appeal the Commission's final ruling. An intervenor formally participates in

the proceeding by filing a request to intervene. Instructions for becoming an intervenor are in the User's Guide under the "e-filing" link on the Commission's Web site.

#### Additional Information

Additional information about the project is available from the Commission's Office of External Affairs, at (866) 208-FERC, or on the FERC Web site at [www.ferc.gov](http://www.ferc.gov) using the "Documents & Filings" link. Click on the eLibrary link, click on General Search and enter the docket number, excluding the last three digits in the Docket Number field (i.e., CP15-499). Be sure you have selected an appropriate date range. For assistance, please contact FERC Online Support at [FercOnlineSupport@ferc.gov](mailto:FercOnlineSupport@ferc.gov) or toll free at (866) 208-3676, or for TTY, contact (202) 502-8659. The eLibrary link also provides access to the texts of formal documents issued by the Commission, such as orders, notices, and rulemakings.

In addition, the Commission offers a free service called eSubscription which allows you to keep track of all formal issuances and submittals in specific dockets. This can reduce the amount of time you spend researching proceedings by automatically providing you with notification of these filings, document summaries, and direct links to the documents. Go to [www.ferc.gov/docs-filing/esubscription.asp](http://www.ferc.gov/docs-filing/esubscription.asp).

Finally, public meetings or site visits will be posted on the Commission's calendar located at [www.ferc.gov/EventCalendar/EventsList.aspx](http://www.ferc.gov/EventCalendar/EventsList.aspx) along with other related information.

Dated: July 1, 2015.

**Kimberly D. Bose,**  
Secretary.

[FR Doc. 2015-16994 Filed 7-10-15; 8:45 am]

**BILLING CODE 6717-01-P**

#### DEPARTMENT OF ENERGY

##### Federal Energy Regulatory Commission

##### Notice Of Staff Attendance at Southwest Power Pool Regional Entity Trustee, Regional State Committee, Members' and Board of Directors' Meetings

The Federal Energy Regulatory Commission (Commission) hereby gives notice that members of its staff may attend the meetings of the Southwest Power Pool, Inc. (SPP) Regional Entity Trustee (RE), Regional State Committee (RSC), SPP Members Committee and Board of Directors, as noted below.

Their attendance is part of the Commission's ongoing outreach efforts.

All meetings will be held at the Hilton KCI, 8801 NW 112th Street, Kansas City, MO 64153.

#### SPP RE

July 27, 2015 (8:00 a.m.–3:00 p.m.)

#### SPP RSC

July 27, 2015 (1:00 p.m.–5:00 p.m.)

#### SPP Members/Board of Directors

July 28, 2015 (8:00 a.m.–3:00 p.m.)

The discussions may address matters at issue in the following proceedings:

Docket No. EL05-19, *Southwestern*

*Public Service Company*

Docket No. ER05-168, *Southwestern*

*Public Service Company*

Docket No. ER06-274, *Southwestern*

*Public Service Company*

Docket No. EL11-34, *Midcontinent*

*Independent System Operator, Inc.*

Docket No. ER11-1844, *Midcontinent*

*Independent System Operator, Inc.*

Docket No. EL12-28, *Xcel Energy*

*Services Inc., et al.*

Docket No. EL12-59, *Golden Spread*

*Electric Cooperative, Inc.*

Docket No. EL12-60, *Southwest*

*Power Pool, Inc., et al.*

Docket No. ER12-480, *Midcontinent*

*Independent System Operator, Inc.*

Docket No. ER12-1179, *Southwest*

*Power Pool, Inc.*

Docket No. ER12-1586, *Southwest*

*Power Pool, Inc.*

Docket No. ER13-366, *Southwest*

*Power Pool, Inc.*

Docket No. ER13-367, *Southwest*

*Power Pool, Inc.*

Docket No. ER13-1864, *Southwest*

*Power Pool, Inc.*

Docket No. ER13-1937, *Southwest*

*Power Pool, Inc.*

Docket No. ER13-1939, *Southwest*

*Power Pool, Inc.*

Docket No. EL14-21, *Southwest*

*Power Pool, Inc.*

Docket No. EL14-30, *Midcontinent*

*Independent System Operator, Inc.*

Docket No. EL14-93, *Kansas*

*Corporation Commission v. Westar*

*Energy, Inc.*

Docket No. EL15-66, *Southern*

*Company Services, et al. v.*

*Midcontinent Independent System*

*Operator*

Docket No. EL15-77, *Morgan Stanley*

*Capital Group Inc. v. Midcontinent*

*Independent System Operator, Inc.*

Docket No. ER14-67, *Southwest*

*Power Pool, Inc.*

Docket No. ER14-781, *Southwest*

*Power Pool, Inc.*

Docket No. ER14-1174, *Southwest*

*Power Pool, Inc.*

Docket No. ER14-1713, *Midcontinent*

<sup>4</sup> The Advisory Council on Historic Preservation's regulations are at Title 36, Code of Federal Regulations, Part 800. Those regulations define historic properties as any prehistoric or historic district, site, building, structure, or object included in or eligible for inclusion in the National Register of Historic Places.

*Independent System Operator, Inc.*  
Docket No. ER14–2022, *Midcontinent Independent System Operator, Inc.*  
Docket No. ER14–2363, *Southwestern Public Service Company*  
Docket No. ER14–2445, *Midcontinent Independent System Operator, Inc.*  
Docket No. ER14–2553, *Southwest Power Pool, Inc.*  
Docket No. ER14–2570, *Southwest Power Pool, Inc.*  
Docket No. ER14–2850, *Southwest Power Pool, Inc.*  
Docket No. ER14–2851, *Southwest Power Pool, Inc.*  
Docket No. ER15–21, *Southwest Power Pool, Inc.*  
Docket No. ER15–279, *Southwest Power Pool, Inc.*  
Docket No. ER15–964, *Southwest Power Pool, Inc.*  
Docket No. ER15–1152, *Southwest Power Pool, Inc.*  
Docket No. ER15–1163, *Southwest Power Pool, Inc.*  
Docket No. ER15–1293, *Southwest Power Pool, Inc.*  
Docket No. ER15–1499, *Southwest Power Pool, Inc.*  
Docket No. ER15–1572, *Southwest Power Pool, Inc.*  
Docket No. ER15–1737, *Southwest Power Pool, Inc.*  
Docket No. ER15–1744, *Southwest Power Pool, Inc.*  
Docket No. ER15–1750, *Southwest Power Pool, Inc.*  
Docket No. ER15–1751, *Southwest Power Pool, Inc.*  
Docket No. ER15–1752, *Southwest Power Pool, Inc.*  
Docket No. ER15–1753, *Southwest Power Pool, Inc.*  
Docket No. ER15–1775, *Southwest Power Pool, Inc.*  
Docket No. ER15–1777, *Southwest Power Pool, Inc.*  
Docket No. ER15–1785, *Southwest Power Pool, Inc.*  
Docket No. ER15–1797, *Southwest Power Pool, Inc.*  
Docket No. ER15–1827, *Southwest Power Pool, Inc.*  
Docket No. ER15–1859, *Southwest Power Pool, Inc.*  
Docket No. ER15–1891, *Southwest Power Pool, Inc.*  
Docket No. ER15–1899, *Southwest Power Pool, Inc.*  
Docket No. ER15–1902, *Southwest Power Pool, Inc.*  
Docket No. ER15–1906, *Southwest Power Pool, Inc.*  
Docket No. ER15–1910, *Southwest Power Pool, Inc.*  
Docket No. ER15–1918, *Southwest Power Pool, Inc.*  
Docket No. ER15–1924, *Southwest Power Pool, Inc.*

Docket No. ER15–1939, *Southwest Power Pool, Inc.*  
Docket No. ER15–1943, *Southwest Power Pool, Inc.*  
Docket No. ER15–1946, *Southwest Power Pool, Inc.*  
Docket No. ER15–1965, *Southwest Power Pool, Inc.*  
Docket No. ER15–2028, *Southwest Power Pool, Inc.*  
Docket No. ER15–2075, *Southwest Power Pool, Inc.*

These meetings are open to the public.

For more information, contact Patrick Clarey, Office of Energy Market Regulation, Federal Energy Regulatory Commission at (317) 249–5937 or [patrick.clarey@ferc.gov](mailto:patrick.clarey@ferc.gov).

Dated: July 6, 2015.

**Kimberly D. Bose,**  
Secretary.

[FR Doc. 2015–16997 Filed 7–10–15; 8:45 am]

**BILLING CODE 6717–01–P**

## DEPARTMENT OF ENERGY

### Federal Energy Regulatory Commission

[Docket No. CP15–520–000]

#### Tennessee Gas Pipeline Company, L.L.C.; Notice of Application

Take notice that on June 19, 2015, Tennessee Gas Pipeline Company, L.L.C. (“Tennessee”), filed an application pursuant to section 7(c) of the Natural Gas Act (NGA) and Part 157 of the Commission’s Regulations, to construct, install, modify, operate, and maintain certain pipeline and compression facilities located in Pennsylvania. Tennessee’s proposed Triad Expansion Project (Project) is designed to add an additional 180,000 Dth/d of new West to East transportation capacity on Tennessee’s 300 Line in Susquehanna County, Pennsylvania. The Project would require the construction of approximately 7 miles of 36-inch-diameter pipeline loop (Line 300–3) immediately west of Compressor Station 321 as well as various piping modifications to tie the new Line 300–3 to existing Line 300 and a pig launcher/receiver at each end of the new loop. The estimated cost of the Triad Expansion Project is \$87,420,002. The filing may be viewed on the web at <http://www.ferc.gov> using the “eLibrary” link. Enter the docket number excluding the last three digits in the docket number field to access the document. For assistance, contact FERC at [FERCOnlineSupport@ferc.gov](mailto:FERCOnlineSupport@ferc.gov) or call

toll-free, (886) 208–3676 or TYY, (202) 502–8659.

Any questions concerning this application should be directed to Jacquelyne M. Rocan, Assistant General Counsel, Tennessee Gas Pipeline Company, L.L.C., 1001 Louisiana Street, Houston, Texas 77002, phone: (713) 420–4544, facsimile: (713) 420–1601, email: [Jacquelyne\\_Rocan@kindermorgan.com](mailto:Jacquelyne_Rocan@kindermorgan.com), or Shannon M. Miller, Regulatory Affairs, Tennessee Gas Pipeline Company, L.L.C., 1001 Louisiana Street, Houston, Texas 77002, phone: (713) 420–4038, facsimile: (713) 420–1605, email: [shannon\\_miller@kindermorgan.com](mailto:shannon_miller@kindermorgan.com).

Pursuant to section 157.9 of the Commission’s rules, 18 CFR 157.9, within 90 days of this Notice the Commission staff will either: complete its environmental assessment (EA) and place it into the Commission’s public record (eLibrary) for this proceeding, or issue a Notice of Schedule for Environmental Review. If a Notice of Schedule for Environmental Review is issued, it will indicate, among other milestones, the anticipated date for the Commission staff’s issuance of the final environmental impact statement (FEIS) or EA for this proposal. The filing of the EA in the Commission’s public record for this proceeding or the issuance of a Notice of Schedule will serve to notify federal and state agencies of the timing for the completion of all necessary reviews, and the subsequent need to complete all federal authorizations within 90 days of the date of issuance of the Commission staff’s FEIS or EA.

There are two ways to become involved in the Commission’s review of this project. First, any person wishing to obtain legal status by becoming a party to the proceedings for this project should, on or before the comment date stated below, file with the Federal Energy Regulatory Commission, 888 First Street, NE., Washington, DC 20426, a motion to intervene in accordance with the requirements of the Commission’s Rules of Practice and Procedure (18 CFR 385.214 or 385.211) and the Regulations under the NGA (18 CFR 157.10). A person obtaining party status will be placed on the service list maintained by the Secretary of the Commission and will receive copies of all documents filed by the applicant and by all other parties. A party must submit 5 copies of filings made with the Commission and must mail a copy to the applicant and to every other party in the proceeding. Only parties to the proceeding can ask for court review of Commission orders in the proceeding.

However, a person does not have to intervene in order to have comments

considered. The second way to participate is by filing with the Secretary of the Commission, as soon as possible, an original and two copies of comments in support of or in opposition to this project. The Commission will consider these comments in determining the appropriate action to be taken, but the filing of a comment alone will not serve to make the filer a party to the proceeding. The Commission's rules require that persons filing comments in opposition to the project provide copies of their protests only to the party or parties directly involved in the protest.

Persons who wish to comment only on the environmental review of this project should submit an original and two copies of their comments to the Secretary of the Commission. Environmental commenters will be placed on the Commission's environmental mailing list, will receive copies of the environmental documents, and will be notified of meetings associated with the Commission's environmental review process. Environmental commenters will not be required to serve copies of filed documents on all other parties. However, the non-party commenters will not receive copies of all documents filed by other parties or issued by the Commission (except for the mailing of environmental documents issued by the Commission) and will not have the right to seek court review of the Commission's final order.

Motions to intervene, protests and comments may be filed electronically via the internet in lieu of paper; see, 18 CFR 385.2001(a)(1)(iii) and the instructions on the Commission's Web site under the "e-Filing" link. The Commission strongly encourages electronic filings.

*Comment Date:* July 27, 2015.

*Dated:* July 6, 2015.

**Kimberly D. Bose,**  
*Secretary.*

[FR Doc. 2015-16995 Filed 7-10-15; 8:45 am]

**BILLING CODE 6717-01-P**

## DEPARTMENT OF ENERGY

### Federal Energy Regulatory Commission

[Docket No. CP15-522-000]

#### Southwest Gas Storage Company; Notice of Request Under Blanket Authorization

Take notice that on June 26, 2015, Southwest Gas Storage Company (Southwest), filed in Docket No. CP15-

522-000, a prior notice request pursuant to sections 157.205, 157.208, 157.213, and 157.216 of the Commission's regulations under the Natural Gas Act (NGA) and Southwest's blanket authorization issued in Docket No. CP99-230-000. Southwest seeks authorization to convert, modify, replace, and abandon certain natural gas storage facilities at its Howell Storage Field located in Livingston County, Michigan, all as more fully set forth in the application which is on file with the Commission and open for public inspection. Specifically, Southwest is converting 15 injection/withdrawal wells to observation wells as part of Southwest's multi-year Howell Storage Field Well Re-Entries and Integrity Work Project. The filing may also be viewed on the web at <http://www.ferc.gov> using the "eLibrary" link. Enter the docket number excluding the last three digits in the docket number field to access the document. For assistance, contact FERC at [FERCOnlineSupport@ferc.gov](mailto:FERCOnlineSupport@ferc.gov) or call toll-free, (866) 208-3676 or TTY, (202) 502-8659.

Any questions concerning this application may be directed to: Stephen T. Veatch, Sr., Director, Certificates & Tariffs, Southwest Gas Storage Company, 1300 Main Street, P.O. Box 4967, Houston TX 77210-4967, by phone at (713) 989-2024, fax at (713) 989-1205 or email at [Stephen.Veatch@energytransfer.com](mailto:Stephen.Veatch@energytransfer.com).

Any person may, within 60 days after the issuance of the instant notice by the Commission, file pursuant to Rule 214 of the Commission's Procedural Rules (18 CFR 385.214) a motion to intervene or notice of intervention. Any person filing to intervene or the Commission's staff may, pursuant to section 157.205 of the Commission's Regulations under the NGA (18 CFR 157.205) file a protest to the request. If no protest is filed within the time allowed therefore, the proposed activity shall be deemed to be authorized effective the day after the time allowed for protest. If a protest is filed and not withdrawn within 30 days after the time allowed for filing a protest, the instant request shall be treated as an application for authorization pursuant to section 7 of the NGA.

Pursuant to section 157.9 of the Commission's rules, 18 CFR 157.9, within 90 days of this Notice the Commission staff will either: complete its environmental assessment (EA) and place it into the Commission's public record (eLibrary) for this proceeding; or issue a Notice of Schedule for Environmental Review. If a Notice of Schedule for Environmental Review is

issued, it will indicate, among other milestones, the anticipated date for the Commission staff's issuance of the final environmental impact statement (FEIS) or EA for this proposal. The filing of the EA in the Commission's public record for this proceeding or the issuance of a Notice of Schedule for Environmental Review will serve to notify federal and state agencies of the timing for the completion of all necessary reviews, and the subsequent need to complete all federal authorizations within 90 days of the date of issuance of the Commission staff's FEIS or EA.

Persons who wish to comment only on the environmental review of this project should submit an original and two copies of their comments to the Secretary of the Commission. Environmental commenters will be placed on the Commission's environmental mailing list, will receive copies of the environmental documents, and will be notified of meetings associated with the Commission's environmental review process. Environmental commenters will not be required to serve copies of filed documents on all other parties. However, the non-party commenters will not receive copies of all documents filed by other parties or issued by the Commission (except for the mailing of environmental documents issued by the Commission) and will not have the right to seek court review of the Commission's final order.

The Commission strongly encourages electronic filings of comments, protests, and interventions via the internet in lieu of paper. See 18 CFR 385.2001(a)(1)(iii) and the instructions on the Commission's Web site ([www.ferc.gov](http://www.ferc.gov)) under the "e-Filing" link. Persons unable to file electronically should submit an original and 5 copies of the protest or intervention to the Federal Energy regulatory Commission, 888 First Street NE., Washington, DC 20426.

*Dated:* July 7, 2015.

**Kimberly D. Bose,**  
*Secretary.*

[FR Doc. 2015-17048 Filed 7-10-15; 8:45 am]

**BILLING CODE 6717-01-P**

## ENVIRONMENTAL PROTECTION AGENCY

[EPA-HQ-OPP-2015-0317; FRL-9930-03]

#### Notice of Receipt of Requests for Amendments To Terminate Uses in Certain Pesticide Registrations; Correction

**AGENCY:** Environmental Protection Agency (EPA).



**ACTION:** Notice; correction.

**SUMMARY:** EPA issued a notice in the **Federal Register** of June 10, 2015, concerning amendments to terminate uses in certain pesticide registrations. This document corrects errors in the sections titled “DATES” and “What action is the agency taking?”.

**FOR FURTHER INFORMATION CONTACT:** Ricardo Jones, Pesticide Re-evaluation Division (7508P), Office of Pesticide Programs, Environmental Protection Agency, 1200 Pennsylvania Ave. NW., Washington, DC 20460–0001; telephone number: (703) 347–0493; email address: [jones.ricardo@epa.gov](mailto:jones.ricardo@epa.gov).

**SUPPLEMENTARY INFORMATION:**

**I. General Information**

*A. Does this action apply to me?*

The Agency included in the June 10, 2015, notice a list of those who may be potentially affected by this action.

*B. How can I get copies of this document and other related information?*

The docket for this action, identified by docket identification (ID) number EPA–HQ–OPP–2015–0317, is available at <http://www.regulations.gov> or at the Office of Pesticide Programs Regulatory Public Docket (OPP Docket) in the Environmental Protection Agency Docket Center (EPA/DC), West William Jefferson Clinton Bldg., Rm. 3334, 1301 Constitution Ave. NW., Washington, DC 20460–0001. The Public Reading Room is open from 8:30 a.m. to 4:30 p.m., Monday through Friday, excluding legal holidays. The telephone number for the Public Reading Room is (202) 566–1744, and the telephone number for the OPP Docket is (703) 305–5805. Please review the visitor instructions and additional information about the docket available at <http://www.epa.gov/dockets>.

**II. What does this correction do?**

The notice (FR Doc. 2015–14092) published in the **Federal Register** of June 10, 2015 (80 FR 32947) (FRL–9928–01) is corrected as follows:

1. On page 32947, second column, under the heading “Dates”, correct paragraph one to add: “chloroxylonol” before the word “registrations” wherever it appears.

2. On page 32947, second column, under the heading “Dates”, after paragraph one, correct to add a new paragraph that reads as follows: “Unless a request is withdrawn by January 6, 2016, for clothianidin registrations for which the registrant has not requested a waiver of the 180–day comment period, EPA expects to issue orders terminating these uses. The Agency will consider

withdrawal requests postmarked no later than January 6, 2016. Comments must be received on or before January 6, 2016, for those clothianidin registrations where the 180–day comment period has not been waived.”

3. On page 32948, first column, paragraph two of Unit II is corrected to read as follows:

“Unless a request is withdrawn by the chloroxylonol registrant by July 10, 2015, EPA expects to issue orders terminating the uses described in Table 1 of the June 10, 2015, document for the active ingredient chloroxylonol. Users of these pesticides or anyone else desiring the retention of a use should contact the applicable registrant directly during this 30–day period. Unless a request is withdrawn by the clothianidin registrant by January 6, 2016, EPA expects to issue orders terminating the uses described in Table 1 of the June 10, 2015, document for the active ingredient clothianidin. Users of these pesticides or anyone else desiring the retention of a use should contact the applicable registrant directly during this 180–day period.”

**Authority:** 7 U.S.C. 136 *et seq.*

Dated: July 6, 2015.

**Michael Goodis,**

*Acting Director, Pesticide Re-Evaluation Division, Office of Pesticide Programs.*

[FR Doc. 2015–17042 Filed 7–10–15; 8:45 am]

**BILLING CODE 6560–50–P**

**FEDERAL ELECTION COMMISSION**

**Sunshine Act Meetings**

**AGENCY:** Federal Election Commission.

**DATE & TIME:** Thursday, July 16, 2015 at 10:00 a.m.

**PLACE:** 999 E Street NW., Washington, DC (Ninth Floor).

**STATUS:** This meeting will be open to the public.

**ITEMS TO BE DISCUSSED:**

Correction and Approval of Minutes for June 18, 2015

Draft Advisory Opinion 2015–02: Grand Trunk Western Railroad Company—Illinois Central Railroad Company PAC

Draft Advisory Opinion 2015–03: Democracy Rules, Inc.

Draft Advisory Opinion 2015–04: Collective Actions PAC

Proposed Directive 74 on the Timely Resolution of Enforcement Matters

Notice to Respondents of Information Sharing by the Commission

Proposed Statement of Policy Regarding the Public Disclosure of Closed Enforcement Files

Policy on Third-Party Appearances Before the Commission to Discuss Advisory Opinions

Draft Notice of Disposition on REG 2014–06: Candidate Debates

Draft Notice of Availability on REG 2015–03: Contributions from Corporations and Other Organizations to Political Committees

Draft Notice of Availability on REG 2015–04: Independent Spending by Corporations, Labor Organizations, Foreign Nationals, and Certain Political Committees

Revised Meeting Dates for September–December 2015

Management and Administrative Matters

Individuals who plan to attend and require special assistance, such as sign language interpretation or other reasonable accommodations, should contact Shawn Woodhead Werth, Secretary and Clerk, at (202) 694–1040, at least 72 hours prior to the meeting date.

**PERSON TO CONTACT FOR INFORMATION:**

Judith Ingram, Press Officer, Telephone: (202) 694–1220.

**Shawn Woodhead Werth,**

*Secretary and Clerk of the Commission.*

[FR Doc. 2015–17275 Filed 7–9–15; 4:15 pm]

**BILLING CODE 6715–01–P**

**DEPARTMENT OF HEALTH AND HUMAN SERVICES**

**Agency for Toxic Substances and Disease Registry**

**[30Day–15–15TG]**

**Agency Forms Undergoing Paperwork Reduction Act Review**

The Agency for Toxic Substances and Disease Registry (ATSDR) has submitted the following information collection request to the Office of Management and Budget (OMB) for review and approval in accordance with the Paperwork Reduction Act of 1995. The notice for the proposed information collection is published to obtain comments from the public and affected agencies.

Written comments and suggestions from the public and affected agencies concerning the proposed collection of information are encouraged. Your comments should address any of the following: (a) Evaluate whether the proposed collection of information is necessary for the proper performance of the functions of the agency, including whether the information will have practical utility; (b) Evaluate the accuracy of the agencies estimate of the



burden of the proposed collection of information, including the validity of the methodology and assumptions used; (c) Enhance the quality, utility, and clarity of the information to be collected; (d) Minimize the burden of the collection of information on those who are to respond, including through the use of appropriate automated, electronic, mechanical, or other technological collection techniques or other forms of information technology, e.g., permitting electronic submission of responses; and (e) Assess information collection costs.

To request additional information on the proposed project or to obtain a copy of the information collection plan and instruments, call (404) 639-7570 or send an email to [omb@cdc.gov](mailto:omb@cdc.gov). Written comments and/or suggestions regarding the items contained in this notice should be directed to the Attention: CDC Desk Officer, Office of Management and Budget, Washington, DC 20503 or by fax to (202) 395-5806. Written comments should be received within 30 days of this notice.

### Proposed Project

Promotion of the National ALS Registry to Non-referral Centers—New—Agency for Toxic Substances and Disease Registry (ATSDR).

### Background and Brief Description

ATSDR is requesting a two-year OMB approval for the information collection project entitled “Promotion of the National ALS Registry to Non-referral Centers”. ATSDR is authorized by the Public Health Law No: 110-373, ALS Registry Act to (1) develop a system to collect data on amyotrophic lateral sclerosis (ALS) and other motor neuron disorders that can be confused with ALS, misdiagnosed as ALS, or progress to ALS; and (2) establish a national registry for the collection and storage of such data to develop a population-based registry of cases.

ATSDR implemented the National ALS Registry (Registry) in 2009 using an

algorithm applied to national administrative databases. A self-registration component was launched in October 2010.

The primary goal of the Registry is to obtain more complete information on the likely prevalence of ALS and to better describe the demographic characteristics (age, race, sex, and geographic location) of those with ALS. The secondary goal of the registry is to collect additional information on potential risk factors for ALS including, but not limited to, family history of ALS, smoking history, and military service.

The Registry’s case ascertainment methodology required validation; therefore, ATSDR established State and Metropolitan ALS Surveillance Projects (Surveillance Projects). In order to avoid biasing results from the Surveillance Projects’ evaluation of the Registry’s completeness, staff were instructed to not promote the Registry during the surveillance period.

The proposed project is a new component to be added to the existing Registry and ALS Surveillance Projects to increase self-enrollment rates of those with ALS. According to the Morbidity and Mortality Weekly Report (MMWR) published in 2014, the proportion of cases identified via self-registration was lower than those identified in the administrative data for the period October 2010–December 2011. On-going self-registration is critical because not all persons with ALS can be identified through the algorithm, and only self-registering persons with ALS can complete the risk-factor surveys. Therefore, efforts to increase Registry awareness among non-referral center neurology practices/neurologists is needed to increase self-enrollment of persons with ALS.

This new information collection aims to evaluate educational and promotional outreach activities among select non-referral/non-specialty center neurology practices and is a result of the need to promote the Registry among

neurologists who do not work at major ALS referral centers. The following objectives are set for this project:

(1) To implement a pilot project to conduct educational and promotional outreach activities at non-referral center neurology practices in the U.S., to inform neurologists and their staff about the Registry;

(2) To encourage neurologists to inform their patients about the Registry, and to increase persons with ALS self-enrollment in the Registry through the web portal via the use of existing Registry brochures, pamphlets, and factsheets; and

(3) To examine the effectiveness of educational and promotional outreach activities by reviewing persons with ALS self-enrollment rates before, during, and after the project period.

By increasing self-enrollment rates, ATSDR will be able to produce more accurate estimates of prevalence of ALS, and collect risk-factor survey data from a more representative sample of persons with ALS nationwide which will allow ATSDR to fulfill its congressional mandate under the ALS Registry Act.

To achieve these objectives, a four group educational and promotional outreach project respondents has been designed.

Data for the study will be gathered by means of initial eligibility phone calls and follow-up phone calls and mailings, for neurologists who do or would diagnose/care for patients with ALS. Train-the-trainer sessions will be conducted to educate neurologists about the Registry and key informant interviews with neurologists will be done to better understand their knowledge, attitudes, and beliefs about the Registry, and to gather additional information about the currently deployed Registry materials.

Participation is voluntary. The total annual burden hours for the proposed project is 344. There is no cost to the respondents other than their time.

### ESTIMATED ANNUALIZED BURDEN HOURS

Type of respondents	Form name	Number of respondents	Number of responses per respondent	Avg. burden per response (in hrs.)
Neurologist Support Staff .....	Initial Phone Call .....	1,900	1	6/60
Neurologist Support Staff .....	Fax to Determine Provider Status .....	380	1	1/60
Neurologist Support Staff .....	Follow-up Phone Call 1 (One-Week Post Mailing).	950	1	3/60
Neurologist Support Staff .....	Follow-up Phone Call 2 (Three Months Post Mailing).	950	1	3/60
Neurologist Support Staff .....	Fax to Determine if Mailing was Received ....	190	1	1/60
Neurologist/Neurologist Support Staff .....	Train-the-trainer Invitation Phone Call .....	60	1	6/60
Neurologist/Neurologist Support Staff .....	Key Informant Interview Invitation Phone Call	64	1	6/60
Neurologist/Neurologist Support Staff .....	Train-the-trainer .....	21	1	1

## ESTIMATED ANNUALIZED BURDEN HOURS—Continued

Type of respondents	Form name	Number of respondents	Number of responses per respondent	Avg. burden per response (in hrs.)
Neurologist .....	Key Informant Interview .....	16	1	1

**Leroy A. Richardson,**

*Chief, Information Collection Review Office, Office of Scientific Integrity, Office of the Associate Director for Science, Office of the Director, Centers for Disease Control and Prevention.*

[FR Doc. 2015-17011 Filed 7-10-15; 8:45 am]

**BILLING CODE 4163-18-P**

## DEPARTMENT OF HEALTH AND HUMAN SERVICES

### Centers for Disease Control and Prevention

[60Day-15-0920-0573; Docket No. CDC-2015-0054]

### Proposed Data Collection Submitted for Public Comment and Recommendations

**AGENCY:** Centers for Disease Control and Prevention (CDC), Department of Health and Human Services (HHS).

**ACTION:** Notice with comment period.

**SUMMARY:** The Centers for Disease Control and Prevention (CDC), as part of its continuing efforts to reduce public burden and maximize the utility of government information, invites the general public and other Federal agencies to take this opportunity to comment on proposed and/or continuing information collections, as required by the Paperwork Reduction Act of 1995. This notice invites comment on a proposed revisions of the National HIV Surveillance System (NHSS) information collection. This data collection provides the primary population-based data used to describe the epidemiology of HIV in the United States.

**DATES:** Written comments must be received on or before September 11, 2015.

**ADDRESSES:** You may submit comments, identified by Docket No. CDC-2015-0054 by any of the following methods:

- *Federal eRulemaking Portal:* Regulation.gov. Follow the instructions for submitting comments.

- *Mail:* Leroy A. Richardson, Information Collection Review Office, Centers for Disease Control and Prevention, 1600 Clifton Road NE., MS-D74, Atlanta, Georgia 30329.

*Instructions:* All submissions received must include the agency name and

Docket Number. All relevant comments received will be posted without change to *Regulations.gov*, including any personal information provided. For access to the docket to read background documents or comments received, go to *Regulations.gov*.

**Please note:** All public comment should be submitted through the Federal eRulemaking portal (*Regulations.gov*) or by U.S. mail to the address listed above.

**FOR FURTHER INFORMATION CONTACT:** To request more information on the proposed project or to obtain a copy of the information collection plan and instruments, contact the Information Collection Review Office, Centers for Disease Control and Prevention, 1600 Clifton Road NE., MS-D74, Atlanta, Georgia 30329; phone: 404-639-7570; Email: *omb@cdc.gov*.

**SUPPLEMENTARY INFORMATION:** Under the Paperwork Reduction Act of 1995 (PRA) (44 U.S.C. 3501-3520), Federal agencies must obtain approval from the Office of Management and Budget (OMB) for each collection of information they conduct or sponsor. In addition, the PRA also requires Federal agencies to provide a 60-day notice in the **Federal Register** concerning each proposed collection of information, including each new proposed collection, each proposed extension of existing collection of information, and each reinstatement of previously approved information collection before submitting the collection to OMB for approval. To comply with this requirement, we are publishing this notice of a proposed data collection as described below.

Comments are invited on: (a) Whether the proposed collection of information is necessary for the proper performance of the functions of the agency, including whether the information shall have practical utility; (b) the accuracy of the agency's estimate of the burden of the proposed collection of information; (c) ways to enhance the quality, utility, and clarity of the information to be collected; (d) ways to minimize the burden of the collection of information on respondents, including through the use of automated collection techniques or other forms of information technology; and (e) estimates of capital or start-up costs and costs of operation, maintenance, and purchase of services

to provide information. Burden means the total time, effort, or financial resources expended by persons to generate, maintain, retain, disclose or provide information to or for a Federal agency. This includes the time needed to review instructions; to develop, acquire, install and utilize technology and systems for the purpose of collecting, validating and verifying information, processing and maintaining information, and disclosing and providing information; to train personnel and to be able to respond to a collection of information, to search data sources, to complete and review the collection of information; and to transmit or otherwise disclose the information.

### Proposed Project

National HIV Surveillance System (NHSS) (OMB Control No. 0920-0573, Expiration 02/29/2016)—Revision—National Center for HIV/AIDS, Viral Hepatitis, STD, and TB Prevention (NCHHSTP), Centers for Disease Control and Prevention (CDC).

### Background and Brief Description

CDC is authorized under Sections 304 and 306 of the Public Health Service Act (42 U.S.C. 242b and 242k) to collect information on cases of human immunodeficiency virus (HIV) and indicators of HIV disease and HIV disease progression including AIDS. Data collected as part of the National HIV Surveillance System (NHSS) are the primary data used to monitor the extent and characteristics of the HIV burden in the United States. HIV surveillance data are used to describe trends in HIV incidence and prevalence and characteristics of infected persons. HIV surveillance data are used widely at the federal, state, and local levels for planning and evaluating prevention programs and health-care services, and allocate funding for prevention and care.

As science, technology, and our understanding of HIV have evolved, the NHSS has been updated periodically. CDC, in collaboration with health departments in the 50 states, the District of Columbia, and U.S. dependent areas, conducts national surveillance for cases of HIV infection that includes critical data across the spectrum of HIV disease

from HIV diagnosis, to AIDS, the end-stage disease caused by infection with HIV, and death. In addition, this national system provides essential data to estimate HIV incidence and monitor patterns in HIV drug resistance and genetic diversity, as well as provide information on perinatal exposures in the United States.

The CDC surveillance case definition has been modified periodically to accurately monitor disease in adults, adolescents and children and reflect use of new testing technologies and changes in HIV treatment. Information is then updated in the case report forms and reporting software as needed.

In 2014, following extensive consultation and peer review, CDC and the Council of State and Territorial Epidemiologists (CSTE) revised and combined the surveillance case definitions for human immunodeficiency virus (HIV) infection into a single case definition for persons of all ages. Laboratory criteria for defining a confirmed case now accommodate new multitest algorithms, including criteria for differentiating between HIV-1 and HIV-2 infection and for recognizing early HIV infection. Clinical (nonlaboratory) criteria for defining a case for surveillance purposes have been made more practical by eliminating the requirement for information about laboratory tests. The surveillance case definition is intended primarily for monitoring the HIV infection burden and planning for prevention and care on a population level, not as a basis for clinical decisions for individual patients. CDC and CSTE recommend that all states and territories conduct case surveillance of HIV infection using this revised surveillance case definition.

Modifications to data elements to accommodate the 2014 HIV Case

Surveillance definition were approved in the last renewal of this information collection. The updates requested in this revision request include modifications to currently collected data elements and forms to accommodate new testing technologies as well as clinical practice guidelines. Specifically, the *HIV Testing and Antiretroviral Use History* section will be revised on the adult/adolescent and pediatric case report forms to include new laboratory tests, additional information on use of antiretroviral (ARV) medications for pre-exposure prophylaxis (PrEP), post-exposure prophylaxis (PEP), prevention of mother-to-child-transmission among HIV infected women during pregnancy, and hepatitis B virus (HBV) treatment. Other changes include addition of dates to the address and patient identification fields to better track residence information and minor formatting changes to the form used for Perinatal HIV Exposure Reporting (PHER).

CDC provides funding for 59 jurisdictions to provide adult and pediatric HIV case reports. Health department staff compile information from laboratories, physicians, hospitals, clinics and other health care providers to complete the HIV and pediatric case reports. CDC estimates that, annually, approximately 1,061 adult HIV case reports and 5 pediatric case reports are processed by each health department.

These data are recorded using standard case report forms either on paper or electronically and entered into the electronic reporting system. Updates to case reports are also entered into the reporting system by health departments as additional information may be received from laboratories, vital statistics, or additional providers. Evaluations are also conducted by

health departments on a subset of case reports (e.g. re-abstraction, validation, de-duplication). CDC estimates that on average approximately 107 evaluations of case reports, 1,576 updates to case reports and 6,303 updates of laboratory test data will be processed by each of the 59 health departments annually. Case report information compiled over time by health departments is then de-identified and forwarded to CDC on a monthly basis to become part of the national HIV surveillance database.

Supplemental surveillance data are collected in a subset of areas to provide additional information necessary to estimate HIV incidence, the extent of HIV drug resistance and HIV genetic diversity among persons infected with HIV and to monitor and evaluate perinatal HIV prevention efforts. Health departments funded for these supplemental data collections obtain this information from laboratories, health providers, and medical records. CDC estimates that on average 2,288 reports containing incidence data elements will be processed annually by each of the 25 health departments funded to collect incidence data; 829 reports containing additional data elements on HIV nucleotide sequences from genotype test results will be processed on average by each of the 53 health departments conducting Molecular HIV Surveillance (MHS) and an estimated 114 reports containing perinatal exposure data elements will be processed on average annually by each of the 35 health departments reporting data collected as part of Perinatal HIV Exposure Reporting (PHER). These supplemental data are also reported monthly to CDC.

The total estimated time burden is 52,204 hours. There is no cost to respondents other than their time.

#### ESTIMATED ANNUALIZED BURDEN HOURS

Type of respondent	Form name	Number of respondents	Number of responses per respondent	Average burden per response (in hours)	Total annual burden hours
Health Departments .....	Adult HIV Case Report .....	59	1,061	20/60	20,866
Health Departments .....	Pediatric HIV Case Report .....	59	5	20/60	98
Health Departments .....	Case Report Evaluations .....	59	107	20/60	2,104
Health Departments .....	Case Report Updates .....	59	1,576	5/60	7,749
Health Departments .....	Laboratory Updates .....	59	6,303	1/60	6,198
Health Departments .....	HIV Incidence Surveillance .....	25	2,288	10/60	9,533
Health Departments .....	Molecular HIV Surveillance (MHS) ..	53	829	5/60	3,661
Health Departments .....	Perinatal HIV Exposure Reporting (PHER).	35	114	30/60	1,995
Total .....	.....	.....	.....	.....	52,204

**Leroy A. Richardson,**

Chief, Information Collection Review Office,  
Office of Scientific Integrity, Office of the  
Associate Director for Science, Office of the  
Director, Centers for Disease Control and  
Prevention.

[FR Doc. 2015-17017 Filed 7-10-15; 8:45 am]

BILLING CODE 4163-18-P

## DEPARTMENT OF HEALTH AND HUMAN SERVICES

### Centers for Medicare & Medicaid Services

[Document Identifier: CMS-10464]

#### Agency Information Collection Activities: Submission for OMB Review; Comment Request

**ACTION:** Notice.

**SUMMARY:** The Centers for Medicare & Medicaid Services (CMS) is announcing an opportunity for the public to comment on CMS' intention to collect information from the public. Under the Paperwork Reduction Act of 1995 (PRA), federal agencies are required to publish notice in the **Federal Register** concerning each proposed collection of information, including each proposed extension or reinstatement of an existing collection of information, and to allow a second opportunity for public comment on the notice. Interested persons are invited to send comments regarding the burden estimate or any other aspect of this collection of information, including any of the following subjects: (1) The necessity and utility of the proposed information collection for the proper performance of the agency's functions; (2) the accuracy of the estimated burden; (3) ways to enhance the quality, utility, and clarity of the information to be collected; and (4) the use of automated collection techniques or other forms of information technology to minimize the information collection burden.

**DATES:** Comments on the collection(s) of information must be received by the OMB desk officer by August 12, 2015.

**ADDRESSES:** When commenting on the proposed information collections, please reference the document identifier or OMB control number. To be assured consideration, comments and recommendations must be received by the OMB desk officer via one of the following transmissions: OMB, Office of Information and Regulatory Affairs, Attention: CMS Desk Officer, Fax Number: (202) 395-5806 or Email: [OIRA\\_submission@omb.eop.gov](mailto:OIRA_submission@omb.eop.gov).

To obtain copies of a supporting statement and any related forms for the proposed collection(s) summarized in this notice, you may make your request using one of following:

1. Access CMS' Web site address at <http://www.cms.hhs.gov/PaperworkReductionActof1995>.
2. Email your request, including your address, phone number, OMB number, and CMS document identifier, to [Paperwork@cms.hhs.gov](mailto:Paperwork@cms.hhs.gov).
3. Call the Reports Clearance Office at (410) 786-1326.

**FOR FURTHER INFORMATION CONTACT:** Reports Clearance Office at (410) 786-1326.

**SUPPLEMENTARY INFORMATION:** Under the Paperwork Reduction Act of 1995 (PRA) (44 U.S.C. 3501-3520), federal agencies must obtain approval from the Office of Management and Budget (OMB) for each collection of information they conduct or sponsor. The term "collection of information" is defined in 44 U.S.C. 3502(3) and 5 CFR 1320.3(c) and includes agency requests or requirements that members of the public submit reports, keep records, or provide information to a third party. Section 3506(c)(2)(A) of the PRA (44 U.S.C. 3506(c)(2)(A)) requires federal agencies to publish a 30-day notice in the **Federal Register** concerning each proposed collection of information, including each proposed extension or reinstatement of an existing collection of information, before submitting the collection to OMB for approval. To comply with this requirement, CMS is publishing this notice that summarizes the following proposed collection(s) of information for public comment:

1. *Type of Information Collection Request:* Revision of a currently approved information collection; *Title of Information Collection:* Agent/Broker Data Collection in Federally-Facilitated Health Insurance Exchanges; *Use:* The CMS collects personally identifiable information from agents/brokers to register them with the FFM and permit them to assist individuals and employers in enrolling in the FFM. We use this collection of information to ensure agents/brokers possess the basic knowledge required to enroll individuals and SHOP employers/employees through the Marketplaces. Agents/brokers will use CMS or third-party systems to enter identifying information and register with the FFM. As a component of registration, agents/brokers are required to complete online training courses through a CMS or third-party Learning Management System

(LMS). Upon completion of their applications and training requirements, agents/brokers will be required to attest to their agreement to adhere to FFM standards and requirements through a CMS or third-party LMS. *Form Number:* CMS-10464 (OMB control number: 0938-1204); *Frequency:* Annually; *Affected Public:* Private sector (Business or other for-profits and Not-for-profit institutions); *Number of Respondents:* 19,474; *Total Annual Responses:* 32,929,239; *Total Annual Hours:* 2,786,198. (For policy questions regarding this collection contact Daniel Brown at 301-492-5146.)

Dated: July 8, 2015.

**William N. Parham, III,**

Director, Paperwork Reduction Staff, Office  
of Strategic Operations and Regulatory  
Affairs.

[FR Doc. 2015-17037 Filed 7-10-15; 8:45 am]

BILLING CODE 4120-01-P

## DEPARTMENT OF HEALTH AND HUMAN SERVICES

### Administration for Children and Families

#### Submission for OMB Review; Comment Request

*Title:* LIHEAP Quarterly Allocation Estimates, Form ACF-535.

*OMB No.:* 0970-0037.

*Description:* The LIHEAP Quarterly Allocation Estimates, ACF Form-535 is a one-page form that is sent to 50 State grantees and to the District of Columbia. It is also sent to Tribal Government grantees that receive over \$1 million annually for the Low Income Home Energy Assistance Program (LIHEAP). Grantees are asked to complete and submit the form in the 4th quarter of each year. The data collected on the form are grantees' estimates of obligations they expect to make each quarter for the upcoming fiscal year for the LIHEAP program. This is the only method used to request anticipated distributions of the grantees' LIHEAP funds. The information is used to develop apportionment requests to OMB and to make grant awards based on grantees' anticipated needs. Information collected on this form is not available through any other Federal source. Submission of the form is voluntary.

*Respondents:* State Governments, and Tribal Governments that receive over \$1 million annually, and the District of Columbia.

## ANNUAL BURDEN ESTIMATES

Instrument	Number of respondents	Number of responses per respondent	Average burden hours per response	Total burden hours
LIHEAP Quarterly Allocation Estimates, Form ACF-535 .....	52	1	.25	13

*Estimated Total Annual Burden Hours:* 13.

*Additional Information:*

Copies of the proposed collection may be obtained by writing to the Administration for Children and Families, Office of Planning, Research and Evaluation, 370 L'Enfant Promenade SW., Washington, DC 20447, Attn: ACF Reports Clearance Officer. All requests should be identified by the title of the information collection. Email address: [infocollection@acf.hhs.gov](mailto:infocollection@acf.hhs.gov).

*OMB Comment:*

OMB is required to make a decision concerning the collection of information between 30 and 60 days after publication of this document in the **Federal Register**. Therefore, a comment is best assured of having its full effect if OMB receives it within 30 days of publication. Written comments and recommendations for the proposed information collection should be sent directly to the following: Office of Management and Budget, Paperwork Reduction Project, Email: [OIRA\\_SUBMISSION@OMB.EOP.GOV](mailto:OIRA_SUBMISSION@OMB.EOP.GOV), Attn: Desk Officer for the Administration for Children and Families.

**Robert Sargis,**

*Reports Clearance Officer.*

[FR Doc. 2015-17030 Filed 7-10-15; 8:45 am]

**BILLING CODE 4184-01-P**

## DEPARTMENT OF HEALTH AND HUMAN SERVICES

### Food and Drug Administration

[Docket No. FDA-2015-N-0001]

### Science Board to the Food and Drug Administration; Notice of Meeting

**AGENCY:** Food and Drug Administration, HHS.

**ACTION:** Notice.

This notice announces a forthcoming meeting of a public advisory committee of the Food and Drug Administration (FDA). The meeting will be open to the public.

*Name of Committee:* Science Board to the Food and Drug Administration (Science Board).

*General Function of the Committee:* The Science Board provides advice to the Commissioner of Food and Drugs

and other appropriate officials on specific, complex scientific and technical issues important to FDA and its mission, including emerging issues within the scientific community. Additionally, the Science Board provides advice to the Agency on keeping pace with technical and scientific developments including in regulatory science, input into the Agency's research agenda, and on upgrading its scientific and research facilities and training opportunities. It will also provide, where requested, expert review of Agency sponsored intramural and extramural scientific research programs.

*Date and Time:* The meeting will be held on July 29, 2015, from 8:30 a.m. to 4 p.m.

*Location:* FDA White Oak Campus, 10903 New Hampshire Ave., Bldg. 31 Conference Center, the Great Room (Rm. 1503 B and C), Silver Spring, MD 20993-0002. For those unable to attend in person, the meeting will also be Webcast. The link for the Webcast is available at: <https://collaboration.fda.gov/scienceboard2015/>. Answers to commonly asked questions including information regarding special accommodations due to a disability, visitor parking, and transportation may be accessed at: <http://www.fda.gov/AdvisoryCommittees/AboutAdvisoryCommittees/ucm408555.htm>.

*Contact Person:* Rakesh Raghuwanshi, Office of the Chief Scientist, Food and Drug Administration, Bldg. 1, Rm. 3309, 10903 New Hampshire Ave., Silver Spring, MD 20993, 301-796-4769, [rakesh.raghuwanshi@fda.hhs.gov](mailto:rakesh.raghuwanshi@fda.hhs.gov), or FDA Advisory Committee Information Line, 1-800-741-8138 (301-443-0572 in the Washington, DC area). A notice in the **Federal Register** about last minute modifications that impact a previously announced advisory committee meeting cannot always be published quickly enough to provide timely notice. Therefore, you should always check the Agency's Web site at <http://www.fda.gov/AdvisoryCommittees/default.htm> and scroll down to the appropriate advisory committee meeting link, or call the advisory committee information line to learn about possible

modifications before coming to the meeting.

*Agenda:* The Science Board will be provided with a report from the Commissioner's Fellowship Program Evaluation subcommittee and will be provided with a progress report from the Science Looking Forward subcommittee. The Board will hear an overview of two scientific activities from the Center for Veterinary Medicine and will be asked to provide input on strategies to implement targeted directives contained in the National Strategy for Combating Antibiotic-Resistant Bacteria, designed to guide action by public health, health care, and veterinary partners in a common effort to address urgent and serious drug-resistant threats that affect people in the United States and around the world. A recipient of one of the Fiscal Year 2014 Scientific Achievement Awards (selected by the Board) will provide an overview of the activities for which the award was given. A status update on the 21st Century Cures Act will be presented, and the Deputy Commissioner for Medical Products and Tobacco will discuss his vision for the Office of Medical Products and Tobacco.

FDA intends to make background material available to the public no later than 2 business days before the meeting. If FDA is unable to post the background material on its Web site prior to the meeting, the background material will be made publicly available at the location of the advisory committee meeting, and the background material will be posted on FDA's Web site after the meeting. Background material is available at <http://www.fda.gov/AdvisoryCommittees/Calendar/default.htm>. Scroll down to the appropriate advisory committee meeting link.

*Procedure:* Interested persons may present data, information, or views, orally or in writing, on issues pending before the committee. Written submissions may be made to the contact person on or before July 22, 2015. Oral presentations from the public will be scheduled between approximately 2:45 and 3:45 p.m. Those individuals interested in making formal oral presentations should notify the contact person and submit a brief statement of the general nature of the evidence or

arguments they wish to present, the names and addresses of proposed participants, and an indication of the approximate time requested to make their presentation on or before July 14, 2015. Time allotted for each presentation may be limited. If the number of registrants requesting to speak is greater than can be reasonably accommodated during the scheduled open public hearing session, FDA may conduct a lottery to determine the speakers for the scheduled open public hearing session. The contact person will notify interested persons regarding their request to speak by July 15, 2015.

Persons attending FDA's advisory committee meetings are advised that the Agency is not responsible for providing access to electrical outlets.

FDA welcomes the attendance of the public at its advisory committee meetings and will make every effort to accommodate persons with physical disabilities or special needs. If you require special accommodations due to a disability, please contact Mr. Rakesh Raghuwanshi at least 7 days in advance of the meeting.

FDA is committed to the orderly conduct of its advisory committee meetings. Please visit our Web site at <http://www.fda.gov/AdvisoryCommittees/AboutAdvisoryCommittees/ucm111462.htm> for procedures on public conduct during advisory committee meetings.

Notice of this meeting is given under the Federal Advisory Committee Act (5 U.S.C. app. 2).

Dated: July 7, 2015.

**Leslie Kux,**

*Associate Commissioner for Policy.*

[FR Doc. 2015-16957 Filed 7-10-15; 8:45 am]

**BILLING CODE 4164-01-P**

## DEPARTMENT OF HEALTH AND HUMAN SERVICES

### Food and Drug Administration

[Docket No. FDA-2011-D-0147]

#### **Agency Information Collection Activities; Submission for Office of Management and Budget Review; Comment Request; Guidance for Industry and Food and Drug Administration Staff; Section 905(j) Reports: Demonstrating Substantial Equivalence for Tobacco Products and Demonstrating the Substantial Equivalence of a New Tobacco Product: Responses to Frequently Asked Questions**

**AGENCY:** Food and Drug Administration, HHS.

**ACTION:** Notice.

**SUMMARY:** The Food and Drug Administration (FDA) is announcing that a proposed collection of information has been submitted to the Office of Management and Budget (OMB) for review and clearance under the Paperwork Reduction Act of 1995.

**DATES:** Fax written comments on the collection of information by August 12, 2015.

**ADDRESSES:** To ensure that comments on the information collection are received, OMB recommends that written comments be faxed to the Office of Information and Regulatory Affairs, OMB, Attn: FDA Desk Officer, FAX: 202-395-7285, or emailed to [oira\\_submission@omb.eop.gov](mailto:oira_submission@omb.eop.gov). All comments should be identified with the OMB control number 0910-0673. Also include the FDA docket number found in brackets in the heading of this document.

**FOR FURTHER INFORMATION CONTACT:** FDA PRA Staff, Office of Operations, Food and Drug Administration, 8455 Colesville Rd., COLE-14526, Silver Spring, MD 20993-0002, [PRASStaff@fda.hhs.gov](mailto:PRASStaff@fda.hhs.gov).

**SUPPLEMENTARY INFORMATION:** In compliance with 44 U.S.C. 3507, FDA has submitted the following proposed collection of information to OMB for review and clearance.

**Guidance for Industry and Food and Drug Administration Staff; Section 905(j) Reports: Demonstrating Substantial Equivalence for Tobacco Products OMB Control Number 0910-0673—Extension**

On June 22, 2009, the President signed the Family Smoking Prevention

and Tobacco Control Act (the Tobacco Control Act) (*Pub. L. 111-31*) into law. The Tobacco Control Act amended the Federal Food, Drug, and Cosmetic Act (the FD&C Act) by adding a new chapter granting FDA authority to regulate the manufacture, marketing, and distribution of tobacco products to protect the public health generally and to reduce tobacco use by minors. Section 905(j) of the FD&C Act (21 U.S.C. 387e(j)) authorizes FDA to establish the manner and form for the submission of information related to substantial equivalence (SE). In guidance documents issued under the Good Guidance Practices regulation (21 CFR 10.115), FDA provides recommendations intended to assist persons submitting reports under section 905(j) of the FD&C Act and explains, among other things, FDA's interpretation of the statutory sections related to substantial equivalence.

In the **Federal Register** of March 5, 2015 (80 FR 11989), FDA published a 60-day notice requesting public comment on the proposed collection of information. FDA received one comment. The commenter expressed a concern that small manufacturers have the burden of conducting testing without a definitive guide on what will constitute substantial equivalence. FDA has carefully considered the burden associated with the submission of an SE report. The information needed to demonstrate substantial equivalence is dependent on the new product and the predicate product that the manufacturer identifies. Nevertheless, to assist manufacturers in preparing SE reports, FDA has issued guidance documents and participated in outreach such as webinars to provide manufacturers with information. Moreover, manufacturers seeking to demonstrate substantial equivalence may also contact FDA to seek the Agency's input on the specific types of information that the Agency believes will be necessary to support the manufacturer's section 905(j) report. The commenter also supported FDA's development of more streamlined SE Reports but challenged "new requirements on label changes," and requested that FDA promulgate a rule on categorical exclusions (environmental assessments). Although these comments are outside of the scope of this PRA collection, FDA intends to consider them as part of the Agency's other regulatory efforts as appropriate.

FDA estimates the burden of this collection of information as follows:

TABLE 1—ESTIMATED ANNUAL REPORTING BURDEN <sup>1</sup>

Activity	No. of respondents	No. of responses per respondent	Total annual responses	Average burden per response	Total hours
Full SE 905(j)(1)(A)(i) and 910(a) .....	75	1	75	300	22,500
Product Quantity Change SE Report .....	125	1	125	87	10,875
Same Characteristics SE Report .....	100	1	100	47	4,700
Totals .....					38,075

<sup>1</sup> There are no capital costs or operating and maintenance costs associated with this collection of information.

FDA has based these estimates on information it now has available from interactions with the industry, information related to other regulated products, and FDA's expectations regarding the tobacco industry's use of the section 905(j) pathway to market their products. Table 1 describes the annual reporting burden as a result of the implementation of the SE requirements of sections 905(j) and 910(a) of the FDC Act (21 U.S.C. 387j(a)). Based on current information, FDA now estimates that it will receive 300 section 905(j) reports each year. Of these 300 reports, FDA estimates that 75 of these reports will be "full" SE reports that take a manufacturer approximately 300 hours to prepare. Under the newly issued guidance entitled, "Demonstrating the Substantial Equivalence of a New Tobacco Product: Responses to Frequently Asked Questions," FDA is recommending that certain modifications might be addressed in either a "Same Characteristics SE Report" or "Product Quantity Change Report." FDA estimates that it will receive 100 Same Characteristics SE Reports and that it will take a manufacturer approximately 47 hours to prepare this report. FDA estimates that it will receive 125 Product Quantity Change SE Reports and that it will take a manufacturer approximately 87 hours to prepare this report. Therefore, FDA estimates the burden for submission of SE information will be 38,075 hours.

Dated: July 7, 2015.

**Leslie Kux,**

*Associate Commissioner for Policy.*

[FR Doc. 2015-16952 Filed 7-10-15; 8:45 am]

**BILLING CODE 4164-01-P**

## DEPARTMENT OF HEALTH AND HUMAN SERVICES

### Extension of Comment Period for the Office of the Assistant Secretary for Preparedness and Response Public Access Plan to Federally Funded Research: Publications and Data

**AGENCY:** Department of Health and Human Services.

**ACTION:** Notice of extension of public comment period until July 13.

**SUMMARY:** The Department of Health and Human Services (HHS) is extending the comment period on the Assistant Secretary for Preparedness and Response (ASPR) Public Access Plan for Federally Funded Research: Publications and Data. The document is available to the public via <http://www.phe.gov/Preparedness/planning/science/Pages/AccessPlan.aspx>. The comment period was previously scheduled to end June 25, 2015. The public comment period is extended until July 13, 2015.

**FOR FURTHER INFORMATION CONTACT:** Please submit comments via email to [Harvey.ball@hhs.gov](mailto:Harvey.ball@hhs.gov)

**SUPPLEMENTARY INFORMATION:** Pursuant to Section 103 of the America COMPETES Reauthorization Act of 2010 (Pub. L. 111-358), the Executive Office of the President, Office of Science and Technology Policy (OSTP) issued a memorandum on February 22, 2013 to the heads of federal agencies directing them to develop plans to enhance access to the results of federally-funded scientific research. ASPR is voluntarily developing a public access plan in order to maximize availability of digitally-formatted scientific data resulting from research supported wholly or in part by federal funding that will improve the public's ability to locate and access this data.

*Background:* This plan considers the interests and needs of various stakeholders, including, but not limited to, federally funded researchers, universities, libraries, publishers, data users and civil society groups.

*Availability of Materials:* The draft copy of the ASPR Public Access Plan

will be posted on the [phe.gov](http://www.phe.gov) Web site: <http://www.phe.gov/Preparedness/planning/science/Documents/AccessPlan.pdf>.

*Procedures for Providing Public Input:* All comments must be received by July 13, 2015. Please submit comments to Harvey Ball via email [harvey.ball@hhs.gov](mailto:harvey.ball@hhs.gov).

Dated: July 2, 2015.

**Nicole Lurie,**

*Assistant Secretary for Preparedness and Response.*

[FR Doc. 2015-16969 Filed 7-10-15; 8:45 am]

**BILLING CODE P**

## DEPARTMENT OF HEALTH AND HUMAN SERVICES

### Indian Health Service

#### Office of Direct Service and Contracting Tribes; National Indian Health Outreach and Education—Health Reform Cooperative Agreement; Correction

**AGENCY:** Indian Health Service, HHS.

**ACTION:** Notice; correction.

**SUMMARY:** The Indian Health Service published a document in the **Federal Register** on June 19, 2015, for the FY 2015 National Indian Health Outreach and Education, Health Reform Cooperative Agreement Program. The notice contained two incorrect dates.

**FOR FURTHER INFORMATION CONTACT:** Mr. Paul Gettys, Grant Systems Coordinator, Division of Grants Management (DGM), Indian Health Service, 801 Thompson Avenue, Suite TMP 360, Rockville, MD 20852, Telephone direct (301) 443-2114, or the DGM main number (301) 443-5204. (This is not a toll-free number.)

### Corrections

In the **Federal Register** of June 19, 2015, in FR Doc. 2015-15157, on page 35373, in the third column, under the heading Key Dates, the correct Application Deadline Date and Proof of Non-Profit Status Due Date should read as follows:

Application Deadline Date: August 19, 2015.

Proof of Non-Profit Status Due Date: August 19, 2015.

Dated: July 1, 2015.

**Robert G. McSwain,**

*Acting Director, Indian Health Service.*

[FR Doc. 2015-16953 Filed 7-10-15; 8:45 am]

**BILLING CODE 4160-16-P**

## DEPARTMENT OF HEALTH AND HUMAN SERVICES

### National Institutes of Health

#### Eunice Kennedy Shriver National Institute of Child Health and Human Development (NICHD); Notice of Closed Meeting

Pursuant to section 10(d) of the Federal Advisory Committee Act, as amended (5 U.S.C. App.), notice is hereby given of the following meeting.

The meeting will be closed to the public in accordance with the provisions set forth in section 552b(c)(4) and 552b(c)(6), Title 5 U.S.C., as amended. The grant applications and the discussions could disclose confidential trade secrets or commercial property such as patentable material, and personal information concerning individuals associated with the grant applications, the disclosure of which would constitute a clearly unwarranted invasion of personal privacy.

*Name of Committee:* National Advisory Child Health and Human Development Council.

*Date:* August 27, 2015.

*Time:* 10:00 a.m. to 1:00 p.m.

*Agenda:* To review and evaluate grant applications.

*Place:* National Institutes of Health, 6100 Executive Boulevard, Rockville, MD 20852, (Telephone Conference Call).

*Contact Person:* Caroline Signore, M.D., MPH., Acting Director, Division of Extramural Research, Eunice Kennedy Shriver National Institute of Child Health and Human Development, NIH, 6100 Executive Boulevard, Room 4A05, Bethesda, MD 20892-9304, (301) 496-5577, [signorec@mail.nih.gov](mailto:signorec@mail.nih.gov).

(Catalogue of Federal Domestic Assistance Program Nos. 93.864, Population Research; 93.865, Research for Mothers and Children; 93.929, Center for Medical Rehabilitation Research; 93.209, Contraception and Infertility Loan Repayment Program, National Institutes of Health, HHS)

Dated: July 7, 2015.

**Michelle Trout,**

*Program Analyst, Office of Federal Advisory Committee Policy.*

[FR Doc. 2015-16959 Filed 7-10-15; 8:45 am]

**BILLING CODE 4140-01-P**

## DEPARTMENT OF HEALTH AND HUMAN SERVICES

### National Institutes of Health

#### Center for Scientific Review; Notice of Closed Meetings

Pursuant to section 10(d) of the Federal Advisory Committee Act, as amended (5 U.S.C. App.), notice is hereby given of the following meetings.

The meetings will be closed to the public in accordance with the provisions set forth in sections 552b(c)(4) and 552b(c)(6), Title 5 U.S.C., as amended. The grant applications and the discussions could disclose confidential trade secrets or commercial property such as patentable material, and personal information concerning individuals associated with the grant applications, the disclosure of which would constitute a clearly unwarranted invasion of personal privacy.

*Name of Committee:* Center for Scientific Review Special Emphasis Panel; Member Conflict: Neurologic Disorders.

*Date:* July 29, 2015.

*Time:* 11:00 a.m. to 1:00 p.m.

*Agenda:* To review and evaluate grant applications.

*Place:* National Institutes of Health, 6701 Rockledge Drive, Bethesda, MD 20892, (Telephone Conference Call).

*Contact Person:* Samuel C Edwards, Ph.D., IRG CHIEF, Center for Scientific Review, National Institutes of Health, 6701 Rockledge Drive, Room 5210, MSC 7846, Bethesda, MD 20892, (301) 435-1246, [edwardss@csr.nih.gov](mailto:edwardss@csr.nih.gov).

*Name of Committee:* Center for Scientific Review Special Emphasis Panel; Special Topics in HIV/AIDS Behavioral Research.

*Date:* July 29, 2015.

*Time:* 2:00 p.m. to 4:00 p.m.

*Agenda:* To review and evaluate grant applications.

*Place:* National Institutes of Health, 6701 Rockledge Drive, Bethesda, MD 20892, (Telephone Conference Call).

*Contact Person:* Mark P Rubert, Ph.D., Scientific Review Officer, Center for Scientific Review, National Institutes of Health, 6701 Rockledge Drive, Room 5218, MSC 7852, Bethesda, MD 20892, 301-435-1775, [rubertm@csr.nih.gov](mailto:rubertm@csr.nih.gov).

*Name of Committee:* Center for Scientific Review Special Emphasis Panel; Member Conflict: AIDS and AIDS Related Research.

*Date:* August 6-7, 2015.

*Time:* 10:00 a.m. to 5:00 p.m.

*Agenda:* To review and evaluate grant applications.

*Place:* National Institutes of Health, 6701 Rockledge Drive, Bethesda, MD 20892, (Virtual Meeting).

*Contact Person:* Kenneth A Roebuck, Ph.D., Scientific Review Officer, Center for Scientific Review, National Institutes of Health, 6701 Rockledge Drive, Room 5106, MSC 7852, Bethesda, MD 20892, (301) 435-1166, [roebuckk@csr.nih.gov](mailto:roebuckk@csr.nih.gov).

(Catalogue of Federal Domestic Assistance Program Nos. 93.306, Comparative Medicine; 93.333, Clinical Research, 93.306, 93.333, 93.337, 93.393-93.396, 93.837-93.844, 93.846-93.878, 93.892, 93.893, National Institutes of Health, HHS)

Dated: July 7, 2015.

**Michelle Trout,**

*Program Analyst, Office of Federal Advisory Committee Policy.*

[FR Doc. 2015-16960 Filed 7-10-15; 8:45 am]

**BILLING CODE 4140-01-P**

## DEPARTMENT OF HEALTH AND HUMAN SERVICES

### Substance Abuse and Mental Health Services Administration

#### Agency Information Collection Activities: Proposed Collection; Comment Request

In compliance with Section 3506(c)(2)(A) of the Paperwork Reduction Act of 1995 concerning opportunity for public comment on proposed collections of information, the Substance Abuse and Mental Health Services Administration (SAMHSA) will publish periodic summaries of proposed projects. To request more information on the proposed projects or to obtain a copy of the information collection plans, call the SAMHSA Reports Clearance Officer on (240) 276-1243.

Comments are invited on: (a) Whether the proposed collections of information are necessary for the proper performance of the functions of the agency, including whether the information shall have practical utility; (b) the accuracy of the agency's estimate of the burden of the proposed collection of information; (c) ways to enhance the quality, utility, and clarity of the information to be collected; and (d) ways to minimize the burden of the collection of information on respondents, including through the use of automated collection techniques or other forms of information technology.

#### Proposed Project: Hospital Data Abstraction, Formerly Entitled Evaluation of Emergency Department Crisis Center Follow-Up—(OMB No. 0930-0337)

The Substance Abuse and Mental Health Services Administration's (SAMHSA), Center for Mental Health Services (CMHS) will conduct an evaluation to assess the impact of crisis center follow-up with patients admitted to emergency departments following a suicide attempt.

The overarching purpose of the Hospital Data Abstraction, formerly



entitled Evaluation of Emergency Department Crisis Center Follow-up, is to examine the impact of crisis center follow-up with patients admitted to emergency departments or inpatient behavioral health units following a suicide attempt or serious suicidal ideation on subsequent readmissions for suicidal behavior. This effort assesses the capacity of follow-up to save both lives and critical hospital resources. This evaluation effort includes one data collection activity. Clearance is being requested for the continuation and expansion of the already-approved abstraction of hospital data on patients admitted to emergency departments or inpatient behavioral health units following a suicide attempt or serious suicidal ideation. This effort will continue to examine the impact of crisis center follow-up on readmissions for suicidal behavior. The data collected through this project will ultimately help SAMHSA to understand and direct crisis center follow-up lifesaving

initiatives. The data collection activity is described below.

Hospitals collaborating with two cohorts (cohorts IV and V) of Lifeline crisis centers will participate in this expanded initiative. Fifteen hospitals per cohort will participate for a total of 30. Patient data will be collected for patients admitted for a suicide attempt in the two years prior to collaboration between the hospital and crisis center and for patients admitted for a suicide attempt for the two-year period after collaboration.

The Hospital Data Abstraction Form will be utilized to collect systematic patient data for patients seen in the 30 participating hospitals' emergency departments or inpatient behavioral health units. Information to be abstracted from patient data include: Demographic data, historical data, and subsequent suicidal behavioral and admission data. Data will be de-identified. Hospital staff will review patient data for qualifying (*i.e.*,

admission to the emergency department for suicide attempt) records. Records to be reviewed will include emergency department or inpatient behavioral health unit admissions for the two years prior to crisis center and hospital collaboration and for two years following collaboration. It is expected that a total of 30,000 records will be abstracted by hospital staff and provided to the evaluation team.

This revision involves an increase in the number of participating hospital respondents and burden associated with the continuation/expansion of the already-approved Hospital Data Abstraction Form (OMB No. 0930-0337; Expiration 09/30/2016), as well as the discontinuation of data collection and burden associated with the Crisis Center Data Abstraction Form.

The estimated response burden to collect this information is as follows annualized over the requested three-year clearance period is presented below:

#### TOTAL AND ANNUALIZED AVERAGES: RESPONDENTS, RESPONSES, AND HOURS

Instrument	Number of respondents	Responses per respondent *	Total number of responses	Burden per response	Annual burden *
Hospital Data Abstraction Form .....	30	334	10,020	.04	401

\* Rounded to the nearest whole number.

Send comments to Summer King, SAMHSA Reports Clearance Officer, Room 2-1057, 1 Choke Cherry Road, Rockville, MD 20857 or email her a copy at [summer.king@samhsa.hhs.gov](mailto:summer.king@samhsa.hhs.gov). Written comments should be received by September 11, 2015.

**Summer King,**  
Statistician.

[FR Doc. 2015-17010 Filed 7-10-15; 8:45 am]

BILLING CODE 4162-20-P

## DEPARTMENT OF HOMELAND SECURITY

### Coast Guard

[USCG-2014-0941]

#### Port Access Route Study: In the Chukchi Sea, Bering Strait and Bering Sea

**AGENCY:** Coast Guard, DHS.

**ACTION:** Notice; extension of comment period.

**SUMMARY:** The Coast Guard is extending the comment period for the Port Access Route Study (PARS) in the Chukchi Sea, Bering Strait and Bering Sea until August 18, 2015. This extension is

necessary to allow all interested parties to submit comments to the docket for Coast Guard consideration.

**DATES:** Comments and related material must either be submitted to our online docket via <http://www.regulations.gov> or reach the Docket Management Facility on or before August 18, 2015.

#### ADDRESSES:

**Comment submission:** You may submit comments identified by docket number USCG-2014-0941 using any one of the following methods:

- (1) Federal eRulemaking Portal: <http://www.regulations.gov>.
- (2) Fax: 202-493-2251.
- (3) Mail: Docket Management Facility (M-30), U.S. Department of Transportation, West Building Ground Floor, Room W12-140, 1200 New Jersey Avenue SE., Washington, DC 20590-0001.
- (4) Hand delivery: Same as mail address above, between 9 a.m. and 5 p.m., Monday through Friday, except Federal holidays. The telephone number is 202-366-9329.

To avoid duplication, please use only one of these four methods. See the "Public Participation and Request for Comments" portion of the **SUPPLEMENTARY INFORMATION** section

below for instructions on submitting comments.

**FOR FURTHER INFORMATION CONTACT:** If you have questions on this notice of study or extension of comment period, call or email LT Kody Stitz, Seventeenth Coast Guard District (dpw); telephone (907) 463-2270; email [Kody.J.Stitz@uscg.mil](mailto:Kody.J.Stitz@uscg.mil) or Mr. David Seris, Seventeenth Coast Guard District (dpw); telephone (907) 463-2267; email [David.M.Seris@uscg.mil](mailto:David.M.Seris@uscg.mil).

#### SUPPLEMENTARY INFORMATION:

##### Public Participation and Request for Comments

We encourage you to participate in this study by submitting comments and related materials. All comments received will be posted without change to <http://www.regulations.gov> and will include any personal information you have provided.

##### Submitting Comments

If you submit a comment, please include the docket number for this notice of study (USCG-2014-0941), indicate the specific section of this document to which each comment applies, and provide a reason for each suggestion or recommendation. You

may submit your comments and material online (via <http://www.regulations.gov>) or by fax, mail, or hand delivery, but please use only one of these means. If you submit a comment online via [www.regulations.gov](http://www.regulations.gov), it will be considered received by the Coast Guard when you successfully transmit the comment. If you fax, hand deliver, or mail your comment, it will be considered as having been received by the Coast Guard when it is received at the Docket Management Facility. We recommend that you include your name and a mailing address, an email address, or a telephone number in the body of your document so that we can contact you if we have questions regarding your submission.

To submit your comment online, go to <http://www.regulations.gov>, type "USCG-2014-0941" into the search bar and click search, next to the displayed search results click "Comment Now", which will open the comment page for this study. If you submit your comments by mail or hand delivery, submit them in an unbound format, no larger than 8.5 by 11 inches, suitable for copying and electronic filing. If you submit comments by mail and would like to know that they reached the Facility, please enclose a stamped, self-addressed postcard or envelope. We will consider all comments and material received during the comment period.

#### Viewing Comments and Documents

To view comments, as well as documents mentioned in this preamble as being available in the docket, go to <http://www.regulations.gov>, type "USCG-2014-0941" into the search bar and click search, next to the displayed search results click "Open Docket Folder", which will display all comments and documents associated with this docket. You may also visit the Docket Management Facility in Room W12-140 on the ground floor of the Department of Transportation West Building, 1200 New Jersey Avenue SE., Washington, DC 20590, between 9 a.m. and 5 p.m., Monday through Friday, except Federal holidays. We have an agreement with the Department of Transportation to use the Docket Management Facility.

#### Privacy Act

Anyone can search the electronic form of comments received into any of our dockets by the name of the individual submitting the comment (or signing the comment, if submitted on behalf of an association, business, labor union, etc.). You may review a Privacy Act notice regarding our public dockets

in the January 17, 2008, issue of the **Federal Register** (73 FR 3316).

#### Background and Purpose

The Coast Guard published a Notice of Study in the **Federal Register** of December 05, 2014 entitled, "Port Access Route Study (PARS) in the Chukchi Sea, Bering Strait and Bering Sea". This original notice of study announcement stated the comment period would end on June 3, 2015; however, on February 19, 2015 the Coast Guard issued a notice in the **Federal Register** which errantly stated the comment period would end on August 18, 2015. The Coast Guard placed a correction notice in the **Federal Register** informing the public of the error but because this error was caused by the Coast Guard we are extending the public comment period through August 18, 2015 to ensure all interested members of the public are able to submit their comments to the docket.

Dated: July 2, 2015.

**D.B. Abel,**

*Rear Admiral, U.S. Coast Guard Commander, Seventeenth Coast Guard District.*

[FR Doc. 2015-16967 Filed 7-10-15; 8:45 am]

**BILLING CODE 9110-04-P**

## DEPARTMENT OF HOMELAND SECURITY

### Coast Guard

[Docket No. USCG-2015-0633]

#### Great Lakes Pilotage Advisory Committee; Meeting

**AGENCY:** Coast Guard, Department of Homeland Security.

**ACTION:** Committee Management; Notice of Federal Advisory Committee Meeting.

**SUMMARY:** The Great Lakes Pilotage Advisory Committee will meet on August 5, 2015, in Washington, DC to discuss matters relating to Great Lakes pilotage, including review of proposed Great Lakes pilotage regulations and policies. This meeting will be open to the public.

**DATES:** The Great Lakes Pilotage Advisory Committee will meet on Wednesday, August 5, 2015 from 8:30 a.m. to 5:30 p.m. Please note that this meeting may close early if the committee completes its business. Pre-registration, all submitted written materials, comments, and requests to make oral presentations at the meeting should reach Ms. Michelle Birchfield, Great Lakes Pilotage Advisory Committee Alternate Designated Federal Officer on or before July 28, 2015. Any

written material submitted by the public will be distributed to the committee and become part of the public record.

**ADDRESSES:** The meeting will be held at U.S. Coast Guard Headquarters located at 2703 Martin Luther King Jr. Avenue SE., Washington, DC 20593 in Building 33, lower level conference room. All visitors to Coast Guard Headquarters will have to pre-register to be admitted to the facility. Please provide your full name, date of birth, and Social Security number by close of business on July 28, 2015, to the contact person listed in **FOR FURTHER INFORMATION CONTACT** below. Additionally, all visitors to Coast Guard Headquarters must provide identification in the form of government-issued picture identification card for access to the facility. Please allow at least 30 minutes before the planned start of the meeting in order to pass through security.

For information on facilities or services for individuals with disabilities or to request special assistance at the meeting, contact the person listed in **FOR FURTHER INFORMATION CONTACT** below as soon as possible.

To facilitate public participation, we are inviting public comment on the issues to be considered by the committee as listed in the "Agenda" section below. Comments must be submitted in writing no later than July 28, 2015, and must be identified by [USCG-2015-0633] and may be submitted by one of the following methods:

- *Federal eRulemaking Portal:* <http://www.regulations.gov>. Follow the instructions for submitting comments.
- *Fax:* 202-493-2251.
- *Mail:* Docket Management Facility (M-30), U.S. Department of Transportation, West Building Ground Floor, Room W12-140, 1200 New Jersey Avenue SE., Washington DC 20590-0001.
- *Hand Delivery:* Same as mail address above between 9 a.m. and 5 p.m., Monday through Friday, except Federal holidays. The telephone number is 202-366-9329.

To avoid duplication, please use only one of these four methods.

**Instructions:** All submissions received must include the words "Department of Homeland Security" and the docket number for this action. Comments received will be posted without alteration at <http://www.regulations.gov>, including any personal information provided. You may review a Privacy Act notice regarding our public dockets in the January 17, 2008, issue of the **Federal Register** (73 FR 3316).

**Docket:** For access to the docket to read documents or comments related to

this notice, go to <http://www.regulations.gov>, and use “USCG–2015–0633” in the “Search” box, press Enter, and then click on the item you wish to view.

Public comments will be heard during the meeting on August 5, 2015. Speakers are requested to limit their comments to 5 minutes. Please note that the public comment period may end before the period allotted, following the last call for comments. Contact the individual listed in the **FOR FURTHER INFORMATION CONTACT** section below to register as a speaker.

**FOR FURTHER INFORMATION CONTACT:** Commandant (CG–WWM–2), ATTN: Ms. Michelle Birchfield, Great Lakes Pilotage Advisory Committee Alternate Designated Federal Officer, U.S. Coast Guard Stop 7509, 2703 Martin Luther King Jr. Avenue SE., Washington, DC 20593–7509; telephone 202–372–1537, fax 202–372–8387, or email at [Michelle.R.Birchfield@uscg.mil](mailto:Michelle.R.Birchfield@uscg.mil). If you have questions on viewing or submitting material to the docket, call Cheryl Collins, Program Manager, Docket Operations, telephone 202–366–9826 or 1–800–647–5527.

**SUPPLEMENTARY INFORMATION:** Notice of this meeting is given under the Federal Advisory Committee Act, (Title 5 U.S.C. Appendix). The Great Lakes Pilotage Advisory Committee was established under the authority of 46 U.S.C. 9307, and makes recommendations to the Secretary of Homeland Security and the Coast Guard on matters relating to Great Lakes pilotage, including review of proposed Great Lakes pilotage regulations and policies.

Further information about the Great Lakes Pilotage Advisory Committee is available by going to the Web site: <https://www.facdatabase.gov>. Click on the search tab and type “Great Lakes” into the search form. Then select “Great Lakes Pilotage Advisory Committee” from the list. A copy of all meeting documentation will also be available at <https://www.uscg.mil/hq/cg5/cg552/pilotage.asp> by July 30, 2015. Alternatively, you may contact Ms. Michelle Birchfield as noted in the **FOR FURTHER INFORMATION CONTACT** section above.

#### Agenda

The Great Lakes Pilotage Advisory Committee will meet on Wednesday, August 5, 2015 to review, discuss, deliberate and formulate recommendations as appropriate on topics contained in the below agenda:

(1) Status Report of action taken on Committee recommendations.

(2) Ice Operations: Closing 2014/ Opening 2015.  
(3) State of U.S. Great Lakes Pilotage.  
(4) Status of current rulemakings and audits.

(5) Great Lakes Pilotage Management System (also known as Klein System) upgrade.

(6) Pilot development.

Public comments or questions will be taken throughout the meeting as the committee discusses the issues and prior to deliberations and voting. There will also be a public comment period at the end of the meeting.

*Minutes:* Minutes from the meeting will be available for public view and copying within 90 days following the meeting at <https://www.uscg.mil/hq/cg5/cg552/pilotage.asp>.

**G.C. Rasicot,**

*Director, Marine Transportation Systems, U.S. Coast Guard.*

[FR Doc. 2015–17033 Filed 7–10–15; 8:45 am]

**BILLING CODE 9110–04–P**

## DEPARTMENT OF HOMELAND SECURITY

### U.S. Customs And Border Protection

[CBP Dec. 15–09]

#### **Western Hemisphere Travel Initiative: Designation of an Approved Native American Tribal Card Issued by the Seneca Nation of Indians as an Acceptable Document To Denote Identity and Citizenship for Entry in the United States at Land and Sea Ports of Entry**

**AGENCY:** U.S. Customs and Border Protection, DHS.

**ACTION:** Notice.

**SUMMARY:** This notice announces that the Commissioner of U.S. Customs and Border Protection is designating an approved Native American Tribal Card issued by the Seneca Nation of Indians to U.S. and Canadian citizens as an acceptable travel document for purposes of the Western Hemisphere Travel Initiative. The approved card may be used to denote identity and citizenship of Seneca Nation of Indians members entering the United States from contiguous territory or adjacent islands at land and sea ports of entry.

**DATES:** This designation will become effective on July 13, 2015.

**FOR FURTHER INFORMATION CONTACT:** Arthur A. E. Pitts, Director, Traveler Policies Division, Admissibility and Passenger Programs, Office of Field Operations, U.S. Customs and Border Protection, via email at [arthur.a.pitts@cbp.dhs.gov](mailto:arthur.a.pitts@cbp.dhs.gov).

## SUPPLEMENTARY INFORMATION:

### Background

#### *The Western Hemisphere Travel Initiative*

Section 7209 of the Intelligence Reform and Terrorism Prevention Act of 2004 (IRTPA), Public Law 108–458, as amended, required the Secretary of Homeland Security (Secretary), in consultation with the Secretary of State, to develop and implement a plan to require U.S. citizens and individuals for whom documentation requirements have previously been waived under section 212(d)(4)(B) of the Immigration and Nationality Act (8 U.S.C. 1182(d)(4)(B)) to present a passport or other document or combination of documents as the Secretary deems sufficient to denote identity and citizenship for all travel into the United States. *See* 8 U.S.C. 1185 note. On April 3, 2008, the Department of Homeland Security (DHS) and the Department of State promulgated a joint final rule, effective on June 1, 2009, that implemented the plan known as the Western Hemisphere Travel Initiative (WHTI) at U.S. land and sea ports of entry. *See* 73 FR 18384 (the WHTI land and sea final rule). It amended, among other sections of the Code of Federal Regulations (CFR), 8 CFR 212.0, 212.1, and 235.1. The WHTI land and sea final rule specifies the documents that U.S. citizens and nonimmigrant aliens from Canada, Bermuda, and Mexico are required to present when entering the United States at land and sea ports of entry.

Under the WHTI land and sea final rule, one type of citizenship and identity document that may be presented upon entry to the United States at land and sea ports of entry from contiguous territory or adjacent islands<sup>1</sup> is a Native American Tribal Card that has been designated as an acceptable document to denote identity and citizenship by the Secretary, pursuant to section 7209 of IRTPA. Specifically, 8 CFR 235.1(e), as amended by the WHTI land and sea final rule, states:

Upon designation by the Secretary of Homeland Security of a United States qualifying tribal entity document as an acceptable document to denote identity and citizenship for the purposes of entering the United States, Native Americans may be permitted to present tribal cards upon entering or seeking admission to the United States according to the terms of the voluntary

<sup>1</sup> “Adjacent islands” is defined in 8 CFR 212.0 as “Bermuda and the islands located in the Caribbean Sea, except Cuba.” This definition applies to 8 CFR 212.1 and 235.1.

agreement entered between the Secretary of Homeland Security and the tribe. The Secretary of Homeland Security will announce, by publication of a notice in the **Federal Register**, documents designated under this paragraph. A list of the documents designated under this paragraph will also be made available to the public.

A “United States qualifying tribal entity” is defined as a “tribe, band, or other group of Native Americans formally recognized by the United States Government which agrees to meet WHTI document standards.”<sup>2</sup> Native American tribal cards are also referenced in 8 CFR 235.1(b) which lists the documents U.S. citizens may use to establish identity and citizenship when entering the United States. *See* 8 CFR 235.1(b)(7).

The Secretary has delegated to the Commissioner of U.S. Customs and Border Protection (CBP) the authority to designate certain documents as acceptable border crossing documents for persons arriving in the United States by land or sea from within the Western Hemisphere, including certain United States Native American tribal cards. *See* DHS Delegation Number 7105 (Revision 00), dated January 16, 2009.

#### *Tribal Card Program*

The WHTI land and sea final rule allowed U.S. federally recognized Native American tribes to work with CBP to enter into agreements to develop tribal ID cards that can be designated as acceptable to establish identity and citizenship when entering the United States at land and sea ports of entry from contiguous territory or adjacent islands. CBP has been working with various U.S. federally recognized Native American tribes to facilitate the development of such cards.<sup>3</sup> As part of the process, CBP will enter into one or more agreements with a U.S. federally recognized tribe that specify the requirements for developing and issuing WHTI-compliant tribal cards, including a testing and auditing process to ensure that the cards are produced and issued in accordance with the terms of the agreements.

After production of the cards in accordance with the specified requirements, and successful testing and auditing by CBP of the cards and program, the Secretary of Homeland Security or the Commissioner of CBP may designate the tribal card as an acceptable WHTI-compliant document

for the purpose of establishing identity and citizenship when entering the United States by land or sea from contiguous territory or adjacent islands. Such designation will be announced by publication of a notice in the **Federal Register**. More information about WHTI-compliant documents is available at [www.cbp.gov/travel](http://www.cbp.gov/travel).

#### *Seneca Nation of Indians WHTI-Compliant Tribal Card Program*

The Seneca Nation of Indians (Seneca Nation) has voluntarily established a program to develop a WHTI-compliant tribal card that denotes identity and U.S. or Canadian citizenship. On November 10, 2009, CBP and the Seneca Nation signed a Memorandum of Agreement (MOA) to develop, issue, test, and evaluate tribal cards to be used for border crossing purposes. Pursuant to this MOA, the cards are issued to members of the Seneca Nation who can establish identity, tribal membership, and U.S. or Canadian citizenship. The cards incorporate physical security features acceptable to CBP as well as facilitative technology allowing for electronic validation of identity, citizenship, and tribal membership by CBP. In 2013, CBP and the Seneca Nation entered into two related agreements, a January 15, 2013 service level agreement and an April 15, 2013 security agreement. The former memorializes the technical specifications for the production, issuance and use of the card, and the latter addresses confidentiality and information sharing.

CBP has tested the cards developed by the Seneca Nation pursuant to the above agreements and has performed an audit of the tribe's card program. On the basis of these tests and audit, CBP has determined that the cards meet the requirements of section 7209 of the IRTPA and are acceptable documents to denote identity and citizenship for purposes of entering the United States at land and sea ports of entry from contiguous territory or adjacent islands. CBP's continued acceptance of the tribal card as a WHTI-compliant document is conditional on compliance with the MOA and all related agreements.

Acceptance and use of the WHTI-compliant tribal card is voluntary for tribe members. If an individual is denied a WHTI-compliant tribal card, he or she may still apply for a passport or other WHTI-compliant document.

#### *Designation*

This notice announces that the Commissioner of CBP designates the tribal card issued by the Seneca Nation in accordance with the MOA and all

related agreements between the tribe and CBP as an acceptable WHTI-compliant document pursuant to section 7209 of the IRTPA and 8 CFR 235.1(e). In accordance with these provisions, the approved card, if valid and lawfully obtained, may be used to denote identity and U.S. or Canadian citizenship of Seneca Nation members for the purposes of entering the United States from contiguous territory or adjacent islands at land and sea ports of entry.<sup>4</sup>

Dated: July 7, 2015.

**R. Gil Kerlikowske,**  
*Commissioner.*

[FR Doc. 2015–17039 Filed 7–10–15; 8:45 am]

**BILLING CODE 9111–14–P**

## **DEPARTMENT OF HOMELAND SECURITY**

### **U.S. Customs and Border Protection**

[CBP Dec. 15–10]

#### **Designation of an Enhanced Driver's License and Identity Document Issued by the State of Minnesota as a Travel Document Under the Western Hemisphere Travel Initiative**

**AGENCY:** U.S. Customs and Border Protection, DHS.

**ACTION:** Notice.

**SUMMARY:** This notice announces that the Commissioner of U.S. Customs and Border Protection is designating enhanced driver's licenses and identity documents issued by the State of Minnesota as acceptable documents for purposes of the Western Hemisphere Travel Initiative. These documents may be used to denote identity and citizenship of U.S. citizens entering the United States from within the Western Hemisphere at land and sea ports of entry.

**DATES:** This designation is effective July 13, 2015.

**FOR FURTHER INFORMATION CONTACT:** Arthur A. E. Pitts, Director, Traveler Policies Division, Admissibility and

<sup>2</sup> *See* 8 CFR 212.0. This definition applies to 8 CFR 212.1 and 235.1.

<sup>3</sup> The Native American tribal cards qualifying to be a WHTI-compliant document for border crossing purposes are commonly referred to as “Enhanced Tribal Cards” or “ETCs.”

<sup>4</sup> The Native American Tribal Card issued by the Seneca Nation of Indians may not, by itself, be used by Canadian citizen tribal members to establish that they meet the requirements of section 289 of the Immigration and Nationality Act (INA) [8 U.S.C. 1359]. INA § 289 provides that nothing in this title shall be construed to affect the right of American Indians born in Canada to pass the borders of the United States, but such right shall extend only to persons who possess at least 50 per centum of blood of the American Indian race. While the tribal card may be used to establish a card holder's identity for purposes of INA § 289, it cannot, by itself, serve as evidence of the card holder's Canadian birth or that he or she possesses at least 50% American Indian blood, as required by INA § 289.

Passenger Programs, Office of Field Operations, U.S. Customs and Border Protection, via email at [arthur.a.pitts@cbp.dhs.gov](mailto:arthur.a.pitts@cbp.dhs.gov).

#### SUPPLEMENTARY INFORMATION:

##### Background

##### *The Western Hemisphere Travel Initiative*

Section 7209 of the Intelligence Reform and Terrorism Prevention Act of 2004 (IRTPA), Public Law 108–458, as amended, required the Secretary of Homeland Security (Secretary), in consultation with the Secretary of State, to develop and implement a plan to require U.S. citizens and individuals for whom documentation requirements have previously been waived under section 212(d)(4)(B) of the Immigration and Nationality Act (8 U.S.C. 1182(d)(4)(B)) to present a passport or other document or combination of documents as the Secretary deems sufficient to denote identity and citizenship for all travel into the United States. See 8 U.S.C. 1185 note. On April 3, 2008, the Department of Homeland Security (DHS) and the Department of State promulgated a joint final rule, effective on June 1, 2009, that implemented the plan known as the Western Hemisphere Travel Initiative (WHTI) at U.S. land and sea ports of entry. See 73 FR 18384 (the WHTI land and sea final rule). It amended various sections of title 8 of the Code of Federal Regulations (CFR), including 8 CFR 212.0, 212.1, and 235.1. The WHTI land and sea final rule specifies the documents that U.S. citizens and nonimmigrant aliens from Canada, Bermuda, and Mexico are required to present when entering the United States at land and sea ports of entry from within the Western Hemisphere (which includes contiguous territories and adjacent islands of the United States).

Under the WHTI land and sea final rule, one type of citizenship and identity document that U.S. citizens may present upon entry to the United States is an enhanced driver's license or identification document<sup>1</sup> (EDL) designated as an acceptable document to denote identity and citizenship by the Secretary pursuant to section 7209 of IRTPA, as amended. Section 235.1(d) of title 8 of the Code of Federal

Regulations, as amended by the WHTI land and sea final rule, states:

Upon designation by the Secretary of Homeland Security of an enhanced driver's license as an acceptable document to denote identity and citizenship for purposes of entering the United States, U.S. citizens and Canadians may be permitted to present these documents in lieu of a passport upon entering or seeking admission to the United States according to the terms of the agreements entered between the Secretary of Homeland Security and the entity. The Secretary of Homeland Security will announce, by publication of a notice in the **Federal Register**, documents designated under this paragraph. A list of designated documents will also be made available to the public.

The Secretary has delegated to the Commissioner of U.S. Customs and Border Protection (CBP) the authority to designate certain documents as acceptable border crossing documents for persons arriving in the United States by land or sea from within the Western Hemisphere, including state-specific EDLs. See DHS Delegation Number 7105 (Revision 00), dated January 16, 2009.

##### *EDL Programs*

DHS is committed to working with the various States of the Union and the Government of Canada to facilitate the development of State and province-issued EDLs as travel documents that denote identity and citizenship as required under section 7209 of IRTPA, as amended. As part of the process, CBP will enter into one or more agreements with a State that specifies the requirements for developing and issuing WHTI-compliant EDLs, including a testing and auditing process to ensure that the cards are produced and issued in accordance with the terms of the agreements.

After production of the cards in accordance with the specified requirements, and successful testing and auditing by CBP of the cards and program, the Secretary of DHS or the Commissioner of CBP may designate the EDL as an acceptable WHTI-compliant document for the purpose of establishing identity and citizenship when entering the United States by land or sea from contiguous territory or adjacent islands. Such designation will be announced by publication of a notice in the **Federal Register**. More information about WHTI-compliant documents is available at [www.cbp.gov/travel](http://www.cbp.gov/travel).

##### *Minnesota EDLs*

The State of Minnesota (Minnesota) has established a voluntary program to develop EDLs that would denote identity and citizenship. On October 1,

2012, CBP and Minnesota entered into a Memorandum of Agreement (MOA) to develop, issue, test, and evaluate an enhanced driver's license and identification card with facilitative technology to be used for border crossing purposes. On November 21, 2012, CBP approved the plan outlining the business process for the implementation of the Minnesota EDL program. Under the terms of the MOA and business plan, Minnesota will only issue EDLs to U.S. citizens. EDLs also may be issued as photo identification cards to non-drivers. The cards are to incorporate physical security features acceptable to CBP as well as facilitative technology allowing for electronic validation of identity and citizenship.

Subsequently, CBP and Minnesota entered into two related agreements, a December 11, 2012 service level agreement and an April 15, 2013 security agreement. The former memorializes the technical specifications for the production, issuance and use of the card, and the latter addresses confidentiality and information sharing.

CBP has tested the cards developed by Minnesota pursuant to the above agreements and has performed an audit of Minnesota's EDL program. On the basis of these tests and audit, CBP has determined that the cards meet the requirements of section 7209 of IRTPA and are acceptable documents to denote identity and citizenship for purposes of entering the United States at land and sea ports of entry from contiguous territory or adjacent islands. CBP's continued acceptance of the Minnesota EDL as a WHTI-compliant document is conditional on compliance with the MOA and all related agreements.

Acceptance and use of the WHTI-compliant EDL is voluntary. If an individual is denied a WHTI-compliant EDL, he or she may still apply for a passport or other WHTI-compliant document.

##### *Designation*

This notice announces that the Commissioner of CBP designates the EDL issued by Minnesota in accordance with the MOA and all related agreements between Minnesota and CBP as an acceptable document to denote identity and citizenship pursuant to section 7209 of IRTPA and 8 CFR 235.1(d). Therefore, pursuant to 8 CFR 235.1(d), U.S. citizen holders of Minnesota EDLs may present these EDLs as an alternative to a passport upon entering the United States at all land and sea ports of entry when coming from contiguous territory and

<sup>1</sup> The enhanced driver's license or identification document may be in one of two forms, as decided by the issuing authority, provided that the document (card) denotes identity and citizenship and meets technical requirements: (1) An enhanced driver's license or (2) an enhanced identity card. The designation "EDL" covers both documents.

adjacent islands from within the Western Hemisphere.

Dated: July 7, 2015.

**R. Gil Kerlikowske,**  
Commissioner.

[FR Doc. 2015-17043 Filed 7-10-15; 8:45 am]

BILLING CODE 9111-14-P

## DEPARTMENT OF HOMELAND SECURITY

### U.S. Customs and Border Protection

#### National Customs Automation Program (NCAP) Concerning Remote Location Filing Entry Procedures in the Automated Commercial Environment (ACE) and the Use of the Document Image System for the Submission of Invoices and the Use of eBonds for the Transmission of Single Transaction Bonds

**AGENCY:** U.S. Customs and Border Protection, Department of Homeland Security.

**ACTION:** General notice.

**SUMMARY:** This document announces U.S. Customs and Border Protection's (CBP's) plan to conduct a National Customs Automation Program (NCAP) test concerning entries filed using remote location (RLF) filing procedures. The test expands the entry types eligible for RLF procedures and the port locations where RLF entries may be filed; requires the electronic transmission of invoices using the Document Image System (DIS); and requires that single transaction bonds be transmitted using eBond for RLF entries requiring a single transaction bond. This test applies only to entries "certified for cargo release from summary" filed through the Automated Commercial Environment (ACE). Remote location filing is a special entry procedure which allows importers of record and brokers with a national permit to file an entry electronically from a remote location other than where the goods are being entered.

This test is in furtherance of key CBP modernization initiatives and the development of ACE. CBP is transitioning all entry types to ACE from the legacy Automated Commercial System (ACS). This test checks the viability, reliability and functionality associated with filing invoices using DIS; submitting single transaction bonds using eBond for RLF entries submitted in ACE; and expanding the entry types eligible for RLF procedures and port locations.

This notice invites public comment concerning the test program; provides

legal authority for the test; explains the purpose of the test; provides test participant responsibilities; identifies the regulations that will be waived under the test; provides eligibility criteria for participation in the test; explains the application process; and establishes the duration of the test. This notice also explains the repercussions and appeals process for misconduct under the test.

**DATES:** The initial phase of the RLF test will begin on August 12, 2015. This test will continue until concluded by way of an announcement in the **Federal Register**. Comments will be accepted through the duration of the test.

**ADDRESSES:** Comments concerning this notice and any aspect of this test may be submitted at any time during the test via email to Josephine Baiamonte, ACE Business Office (ABO), Office of International Trade at [josephine.baiamonte@cbp.dhs.gov](mailto:josephine.baiamonte@cbp.dhs.gov). In the subject line of your email, please indicate, "*Comment on RLF Test FRN*".

**FOR FURTHER INFORMATION CONTACT:** For technical questions related to the Automated Commercial Environment (ACE) or Automated Broker Interface (ABI) transmissions, contact your assigned client representative. Interested parties without an assigned client representative should direct their questions to Steven Zaccaro at [steven.j.zaccaro@cbp.dhs.gov](mailto:steven.j.zaccaro@cbp.dhs.gov).

#### SUPPLEMENTARY INFORMATION:

##### I. Background

The National Customs Automation Program (NCAP) was established in Subtitle B of Title VI—Customs Modernization (Customs Modernization Act), in the North American Free Trade Agreement Implementation Act, Pub. L. 103-182, 107 Stat. 2057 (19 U.S.C. 1411). Through NCAP, the initial thrust of customs modernization was on trade compliance and the development of the Automated Commercial Environment (ACE), the planned successor to the Automated Commercial System (ACS). The ability to meet these objectives depends on successfully modernizing CBP's business functions and the information technology that supports those functions. CBP's modernization efforts are accomplished through phased releases of ACE component functionality designed to introduce a new capacity or to replace a specific legacy ACS function. Each release will begin with a test and will end with mandatory compliance with the new ACE feature, thus retiring the legacy ACS function. Each release builds on previous releases and sets the foundation for subsequent releases.

For the convenience of the public, a chronological listing of **Federal Register** publications detailing ACE test developments is set forth below in Section XII, entitled, "Development of ACE Prototypes." The procedures and criteria related to participation in the prior ACE tests remain in effect unless otherwise explicitly changed by this or subsequent notices published in the **Federal Register**.

##### II. Authorization for the Test

The Customs Modernization provisions provide the Commissioner of CBP with authority to conduct limited test programs or procedures designed to evaluate planned components of the NCAP. The test described in this notice is authorized pursuant to § 101.9(b) of title 19 of the Code of Federal Regulations (19 CFR 101.9(b)), which provides for the testing of NCAP programs or procedures. *See* Treasury Decision (T.D.) 95-21.

##### III. Remote Location Filing (RLF)

Remote location filing is a planned component of the NCAP, authorized by section 411 of the Tariff Act of 1930, as amended by section 631 of the Customs Modernization Act. *See* 19 U.S.C. 1411(a)(2)(B). After years of testing RLF entry procedures, CBP published a final rule in the **Federal Register** that implemented RLF as a special entry procedure. *See* 74 FR 69015 (December 30, 2009). These regulations, codified at 19 CFR part 143, subpart E, authorize importers of record and brokers with a national permit to file an entry electronically from a remote location other than where the goods are being entered. Under CBP regulations, only certain entry types may be filed using RLF procedures and these entries must be filed at a RLF-operational CBP location. A current listing of RLF eligible entry types may be found at the following link: <http://www.cbp.gov/trade/entry-summary/remote-location-filing/eligibility>. A current list of RLF-operational CBP locations may be found at the following link: <http://www.cbp.gov/document/guidance/rlf-operational-location-points-contact>.

At this time, the entry types that may be filed using RLF procedures for parties not participating in this test are 01 entries (formal consumption entries), 03 entries (formal consumption entries subject to antidumping or countervailing duties), and 11 entries (informal entries). Interested parties should check the CBP links referenced above for changes to the entry types authorized for RLF procedures and changes to the RLF operational CBP locations.

Under the CBP regulations (19 CFR part 143, subpart E), importers and licensed customs brokers with a national permit must be operational on (1) the Automated Broker Interface (ABI); an interface that allows participants to electronically file required import data with CBP and transfers that data into ACE; (2) the Electronic Invoice Program (EIP), a module of ABI which allows entry filers to transmit detailed invoice data through the Automated Invoice Interface (AII); and (3) the Automated Clearing House (ACH) which is a CBP- approved method for the electronic payment of duties, fees and taxes. RLF entry filers must be operational on ACH at least 30 days prior to filing a RLF entry. Additionally, all entries filed using RLF procedures must be secured by a continuous bond. The CBP regulations also require that any invoice data required or requested by CBP be transmitted electronically using EIP, and any payment of duties, fees and taxes be submitted through ACH. The CBP regulations prohibit combining the use of RLF procedures with the use of line release or immediate entry procedures. RLF filers may certify release from summary, *i.e.*, file an entry summary that serves as both an entry and an entry summary. RLF filers must file electronically (including by facsimile transmissions) all additional information required to be presented with an entry and entry summary that CBP can accept electronically. If CBP cannot accept the additional information electronically, the additional information must be presented in paper form at the port of entry.

#### IV. Request for Participation and Test Participation Criteria

Any party who wishes to participate in this test should contact their assigned client representative and request to participate. Interested parties without an assigned client representative should direct their questions to Steven Zaccaro at [steven.j.zaccaro@cbp.dhs.gov](mailto:steven.j.zaccaro@cbp.dhs.gov), request the assignment of a client representative and submit a request to participate in this test to the newly assigned client representative. Any party seeking to participate in this test must provide CBP, as part of its request to participate, its filer code and the port(s) at which it is interested in filing RLF entries.

In order to participate in this test, an interested party must be a participant in the DIS test. Moreover, any party who participates in this test and wishes to, or is required to, submit a single transaction bond must also participate in the eBond test or use a surety or

surety agent participating in the eBond test for the submission of the single transaction bond. For eligibility requirements for participation in the DIS test, *see* 77 FR 20835 (April 6, 2012); 78 FR 44142 (July 23, 2013); 78 FR 53466 (August 29, 2013); and 79 FR 36083 (June 23, 2014). For eligibility requirements for participation in the eBond test, *see* 79 FR 70881 (November 28, 2014) and 80 FR 516 (January 6, 2015).

#### V. Test Procedures and Participant Responsibilities

Only entries filed through ACE that are certified for ACE cargo release from summary may be submitted under this test. For such ACE entries, this test seeks to determine the viability, reliability and functionality of: (1) Expanding the entry types eligible for RLF procedures and the port locations where RLF entries may be filed; (2) submitting invoices using the DIS, instead of EIP, for entries filed using RLF entry procedures; and (3) submitting single transaction bonds using eBond procedures for entries filed using RLF entry procedures that require such a bond.

Under the RLF ACE test, participants will be allowed to file entry types 01, 03, 11, and 52. Test participants should check the *following link* to determine, for purposes of this test, which entry types are eligible for RLF procedures and the port locations where RLF entries may be filed: <http://www.cbp.gov/trade/entry-summary/remote-location-filing>. Test participants should also check the link regularly for any changes to the list of eligible entry types and port locations. Please note that the list of entry types and operational ports eligible for RLF procedures under this test is larger than the list of entry types and port locations eligible for RLF procedures under the current CBP regulations (19 CFR part 143, subpart E). Test participants are required to submit invoices, including pro forma invoices, required or requested by CBP using the DIS. Test participants may not submit invoice data using EIP. Test participants who file a RLF entry that requires the filing of a single transaction bond must submit it using eBond. The use of eBond for submitting single transaction bonds is mandatory and exclusive, and participants may not submit a single transaction bond through any other manner for RLF entries filed under this test. Test participants are required to follow and abide by all terms, conditions and requirements of the DIS and eBond tests.

#### VI. Waiver of Regulations Under the Test

For purposes of this test, 19 CFR part 143, subpart E is waived to the extent it is inconsistent with the provisions of this test notice.

#### VII. Test Duration

The initial phase of the test will begin August 12, 2015 and will continue until concluded by way of an announcement in the **Federal Register**. At the conclusion of the test, an evaluation will be conducted to assess the viability, reliability and utility of receiving invoices and invoice data through DIS and single transaction bonds through eBond for entries filed using RLF procedures. The final results of the evaluation will be published in the **Federal Register** and the *Customs Bulletin* as required in 19 CFR 101.9(b)(2). Any modification, change or expansion of this test or the DIS or eBond tests will be announced via a separate **Federal Register** notice.

#### VIII. Comments

All interested parties are invited to comment on any aspect of this test at any time. CBP requests comments and feedback on all aspects of this test, including the design, conduct and implementation of the test, in order to determine whether to modify, alter, expand, limit, continue, end, or fully implement this program.

#### IX. Paperwork Reduction Act

The collection of information contained in this test has been approved by the Office of Management and Budget (OMB) in accordance with the requirements of the Paperwork Reduction Act (44 U.S.C. 3507) and assigned OMB number 1651-0024. An agency may not conduct or sponsor, and a person is not required to respond to, a collection of information unless it displays a valid control number assigned by OMB.

#### X. Confidentiality

All data submitted and entered into ACE is subject to the Trade Secrets Act (18 U.S.C. 1905) and is considered confidential, except to the extent as otherwise provided by law. As stated in previous notices, participation in this or any of the previous ACE tests is not confidential and upon a written Freedom of Information Act (FOIA) request, a name(s) of an approved participant(s) will be disclosed by CBP in accordance with 5 U.S.C. 552.

#### XI. Misconduct Under the Test

A test participant may be subject to civil and criminal penalties,



administrative sanctions, liquidated damages, or discontinuance from participation in this test for any of the following:

- (1) Failure to follow the terms and conditions of this test, or the DIS and eBond tests;
- (2) Failure to exercise reasonable care in the execution of participant obligations;
- (3) Failure to abide by applicable laws and regulations that have not been waived; or
- (4) Failure to deposit duties, taxes or fees in a timely manner.

If the Director, Business Transformation Division, ACE Business Office (ABO), Office of International Trade finds that there is a basis for discontinuance of test participation privileges, the test participant will be provided a written notice proposing the discontinuance with a description of the facts or conduct warranting the action. The test participant will be offered the opportunity to appeal the Director's decision in writing within 10 calendar days of receipt of the written notice. The appeal must be submitted to the Executive Director, ABO, Office of International Trade by emailing [Deborah.Augustin@cbp.dhs.gov](mailto:Deborah.Augustin@cbp.dhs.gov).

The Executive Director will issue a decision in writing on the proposed action within 30 working days after receiving a timely filed appeal from the test participant. If no timely appeal is received, the proposed notice becomes the final decision of the Agency as of the date that the appeal period expires. A proposed discontinuance of a test participant's privileges will not take effect unless the appeal process under this paragraph has been concluded with a written decision adverse to the test participant.

In the case of willfulness or those in which public health, interest, or safety so requires, the Director, Business Transformation Division, ABO, Office of International Trade, may immediately discontinue the test participant's privileges upon written notice to the test participant. The notice will contain a description of the facts or conduct warranting the immediate action. The test participant will be offered the opportunity to appeal the Director's decision within 10 calendar days of receipt of the written notice providing for immediate discontinuance. The appeal must be submitted to the Executive Director, ABO, Office of International Trade by emailing [Deborah.Augustin@cbp.dhs.gov](mailto:Deborah.Augustin@cbp.dhs.gov). The immediate discontinuance will remain in effect during the appeal period. The Executive Director will issue a decision in writing on the discontinuance within

15 working days after receiving a timely filed appeal from the test participant. If no timely appeal is received, the notice becomes the final decision of the Agency as of the date that the appeal period expires.

## XII. Developments of ACE Prototypes

A chronological listing of **Federal Register** publications detailing ACE test developments is set forth below.

- ACE Portal Accounts and Subsequent Revision Notices: 67 FR 21800 (May 1, 2002); 69 FR 5360 and 69 FR 5362 (February 4, 2004); 69 FR 54302 (September 8, 2004); 70 FR 5199 (February 1, 2005).
- ACE System of Records Notice: 71 FR 3109 (January 19, 2006).
- Terms/Conditions for Access to the ACE Portal and Subsequent Revisions: 72 FR 27632 (May 16, 2007); 73 FR 38464 (July 7, 2008).
- ACE Non-Portal Accounts and Related Notice: 70 FR 61466 (October 24, 2005); 71 FR 15756 (March 29, 2006).
- ACE Entry Summary, Accounts and Revenue (ESAR I) Capabilities: 72 FR 59105 (October 18, 2007).
- ACE Entry Summary, Accounts and Revenue (ESAR II) Capabilities: 73 FR 50337 (August 26, 2008); 74 FR 9826 (March 6, 2009).
- ACE Entry Summary, Accounts and Revenue (ESAR III) Capabilities: 74 FR 69129 (December 30, 2009).
- ACE Entry Summary, Accounts and Revenue (ESAR IV) Capabilities: 76 FR 37136 (June 24, 2011).
- Post-Entry Amendment (PEA) Processing Test: 76 FR 37136 (June 24, 2011).
- ACE Announcement of a New Start Date for the National Customs Automation Program Test of Automated Manifest Capabilities for Ocean and Rail Carriers: 76 FR 42721 (July 19, 2011).
- ACE Simplified Entry: 76 FR 69755 (November 9, 2011).
- National Customs Automation Program (NCAP) Tests Concerning Automated Commercial Environment (ACE) Document Image System (DIS): 77 FR 20835 (April 6, 2012).
- National Customs Automation Program (NCAP) Tests Concerning Automated Commercial Environment (ACE) Simplified Entry: Modification of Participant Selection Criteria and Application Process: 77 FR 48527 (August 14, 2012).
- Modification of NCAP Test Regarding Reconciliation for Filing Certain Post-Importation Preferential Tariff Treatment Claims under Certain FTAs: 78 FR 27984 (May 13, 2013).
- Modification of Two National Customs Automation Program (NCAP)

Tests Concerning Automated Commercial Environment (ACE) Document Image System (DIS) and Simplified Entry (SE): 78 FR 44142 (July 23, 2013).

- Modification of Two National Customs Automation Program (NCAP) Tests Concerning Automated Commercial Environment (ACE) Document Image System (DIS) and Simplified Entry (SE); Correction: 78 FR 53466 (August 29, 2013).
- Modification of NCAP Test Concerning Automated Commercial Environment (ACE) Cargo Release (formerly known as Simplified Entry): 78 FR 66039 (November 4, 2013).
- Post-Summary Corrections to Entry Summaries Filed in ACE Pursuant to the ESAR IV Test: Modifications and Clarifications: 78 FR 69434 (November 19, 2013).
- National Customs Automation Program (NCAP) Test Concerning the Submission of Certain Data Required by the Environmental Protection Agency and the Food Safety and Inspection Service Using the Partner Government Agency Message Set Through the Automated Commercial Environment (ACE): 78 FR 75931 (December 13, 2013).
- Modification of National Customs Automation Program (NCAP) Test Concerning Automated Commercial Environment (ACE) Cargo Release for Ocean and Rail Carriers: 79 FR 6210 (February 3, 2014).
- Modification of National Customs Automation Program (NCAP) Test Concerning Automated Commercial Environment (ACE) Cargo Release to Allow Importers and Brokers to Certify From ACE Entry Summary: 79 FR 24744 (May 1, 2014).
- Modification of National Customs Automation Program (NCAP) Test Concerning Automated Commercial Environment (ACE) Cargo Release for Truck Carriers: 79 FR 25142 (May 2, 2014).
- Modification of National Customs Automation Program (NCAP) Test Concerning Automated Commercial Environment (ACE) Document Image System: 79 FR 36083 (June 25, 2014).
- Announcement of eBond Test: 79 FR 70881 (November 28, 2014).
- eBond Test Modifications and Clarifications: Continuous Bond Executed Prior to or Outside the eBond Test May Be Converted to an eBond by the Surety and Principal, Termination of an eBond by Filing Identification Number, and Email Address Correction: 80 FR 899 (January 7, 2015).
- Modification of National Customs Automation Program (NCAP) Test Concerning Automated Commercial



Environment (ACE) Document Image System Relating to Animal and Plant Health Inspection Service (APHIS) Document Submissions: 80 FR 5126 (January 30, 2015).

- Modification of National Customs Automation Program (NCAP) Test Concerning the use of Partner Government Agency Message Set through the Automated Commercial Environment (ACE) for the Submission of Certain Data Required by the Environmental Protection Agency (EPA): 80 FR 6098 (February 4, 2015).
- Announcement of Modification of ACE Cargo Release Test to Permit the Combined Filing of Cargo Release and Importer Security Filing (ISF) Data: 80 FR 7487 (February 10, 2015).
- Modification of NCAP Test Concerning ACE Cargo Release for Type 03 Entries and Advanced Capabilities for Truck Carriers: 80 FR 16414 (March 27, 2015).

Dated: July 8, 2015.

**Brenda Smith,**

*Assistant Commissioner, Office of International Trade.*

[FR Doc. 2015-17041 Filed 7-10-15; 8:45 am]

BILLING CODE 9111-14-P

## DEPARTMENT OF HOMELAND SECURITY

### U.S. Citizenship and Immigration Services

[OMB Control Number 1615-0050]

**Agency Information Collection Activities: Request for Hearing on a Decision in Naturalization Proceedings (Under Section 336 of the INA), Form N-336; Revision of a Currently Approved Collection; Extension.**

**AGENCY:** U.S. Citizenship and Immigration Services, Department of Homeland Security.

**ACTION:** 60-Day notice.

**SUMMARY:** The Department of Homeland Security (DHS), U.S. Citizenship and Immigration (USCIS) invites the general public and other Federal agencies to comment upon this proposed revision of a currently approved collection of information. In accordance with the Paperwork Reduction Act (PRA) of 1995, the information collection notice is published in the **Federal Register** to obtain comments regarding the nature of the information collection, the categories of respondents, the estimated burden (*i.e.* the time, effort, and resources used by the respondents to respond), the estimated cost to the respondent, and the actual information collection instruments.

**DATES:** Comments are encouraged and will be accepted for 60 days until September 11, 2015.

**ADDRESSES:** All submissions received must include the OMB Control Number 1615-0050 in the subject box, the agency name and Docket ID USCIS-2007-0020. To avoid duplicate submissions, please use only *one* of the following methods to submit comments:

(1) *Online.* Submit comments via the Federal eRulemaking Portal Web site at <http://www.regulations.gov> under e-Docket ID number USCIS-2007-0020;

(2) *Email.* Submit comments to [USCISFRComment@uscis.dhs.gov](mailto:USCISFRComment@uscis.dhs.gov);

(3) *Mail.* Submit written comments to DHS, USCIS, Office of Policy and Strategy, Chief, Regulatory Coordination Division, 20 Massachusetts Avenue NW., Washington, DC 20529-2140.

**FOR FURTHER INFORMATION CONTACT:** USCIS, Office of Policy and Strategy, Regulatory Coordination Division, Laura Dawkins, Chief, 20 Massachusetts Avenue NW., Washington, DC 20529-2140, telephone number 202-272-8377 (This is not a toll-free number. Comments are not accepted via telephone message). Please note contact information provided here is solely for questions regarding this notice. It is not for individual case status inquiries. Applicants seeking information about the status of their individual cases can check Case Status Online, available at the USCIS Web site at <http://www.uscis.gov>, or call the USCIS National Customer Service Center at 800-375-5283 (TTY 800-767-1833).

#### SUPPLEMENTARY INFORMATION:

##### Comments:

You may access the information collection instrument with instructions, or additional information by visiting the Federal eRulemaking Portal site at: <http://www.regulations.gov> and enter USCIS-2007-0020 in the search box. Regardless of the method used for submitting comments or material, all submissions will be posted, without change, to the Federal eRulemaking Portal at <http://www.regulations.gov>, and will include any personal information you provide. Therefore, submitting this information makes it public. You may wish to consider limiting the amount of personal information that you provide in any voluntary submission you make to DHS. DHS may withhold information provided in comments from public viewing that it determines may impact the privacy of an individual or is offensive. For additional information, please read the Privacy Act notice that

is available via the link in the footer of <http://www.regulations.gov>.

Written comments and suggestions from the public and affected agencies should address one or more of the following four points:

(1) Evaluate whether the proposed collection of information is necessary for the proper performance of the functions of the agency, including whether the information will have practical utility;

(2) Evaluate the accuracy of the agency's estimate of the burden of the proposed collection of information, including the validity of the methodology and assumptions used;

(3) Enhance the quality, utility, and clarity of the information to be collected; and

(4) Minimize the burden of the collection of information on those who are to respond, including through the use of appropriate automated, electronic, mechanical, or other technological collection techniques or other forms of information technology, *e.g.*, permitting electronic submission of responses.

#### Overview of This Information Collection

(1) *Type of Information Collection:* Revision of a Currently Approved Collection.

(2) *Title of the Form/Collection:* Request for Hearing on a Decision in Naturalization Proceedings (Under Section 336 of the INA).

(3) *Agency form number, if any, and the applicable component of the DHS sponsoring the collection:* N-336; USCIS.

(4) *Affected public who will be asked or required to respond, as well as a brief abstract:* Primary: Individuals or households. Form N-336 provides a method for applicants, whose applications for naturalization are denied, to request a new hearing by an Immigration Officer of the same or higher rank as the denying officer, within 30 days of the original decision.

(5) *An estimate of the total number of respondents and the amount of time estimated for an average respondent to respond:* The estimated total number of respondents for the information collection N-336 is 5,253 and the estimated hour burden per response is 2.75 hours for paper submissions and 2.4 hours for MyUSCIS submissions.

(6) *An estimate of the total public burden (in hours) associated with the collection:* The total estimated annual hour burden associated with this collection is 12,706 hours.

(7) *An estimate of the total public burden (in cost) associated with the*

*collection:* The estimated total annual cost burden associated with this collection of information is \$1,313,250.

Dated: July 1, 2015.

**Laura Dawkins,**

*Chief, Regulatory Coordination Division, Office of Policy and Strategy, U.S. Citizenship and Immigration Services, Department of Homeland Security.*

[FR Doc. 2015-17084 Filed 7-10-15; 8:45 am]

**BILLING CODE 9111-97-P**

## DEPARTMENT OF HOMELAND SECURITY

### U.S. Citizenship and Immigration Services

[OMB Control Number 1615-0056]

#### Agency Information Collection Activities: Application To Preserve Residence for Naturalization, Form N-470; Revision of a Currently Approved Collection

**AGENCY:** U.S. Citizenship and Immigration Services, Department of Homeland Security.

**ACTION:** 60-Day notice.

**SUMMARY:** The Department of Homeland Security (DHS), U.S. Citizenship and Immigration

(USCIS) invites the general public and other Federal agencies to comment upon this proposed revision of a currently approved collection of information. In accordance with the Paperwork Reduction Act (PRA) of 1995, the information collection notice is published in the **Federal Register** to obtain comments regarding the nature of the information collection, the categories of respondents, the estimated burden (*i.e.* the time, effort, and resources used by the respondents to respond), the estimated cost to the respondent, and the actual information collection instruments.

**DATES:** Comments are encouraged and will be accepted for 60 days until September 11, 2015.

**ADDRESSES:** All submissions received must include the OMB Control Number 1615-0056 in the subject box, the agency name and Docket ID USCIS-2006-0030. To avoid duplicate submissions, please use only *one* of the following methods to submit comments:

- (1) *Online.* Submit comments via the Federal eRulemaking Portal Web site at <http://www.regulations.gov> under e-Docket ID number USCIS-2006-0030;
- (2) *Email.* Submit comments to [USCISFRComment@uscis.dhs.gov](mailto:USCISFRComment@uscis.dhs.gov);
- (3) *Mail.* Submit written comments to DHS, USCIS, Office of Policy and

Strategy, Chief, Regulatory Coordination Division, 20 Massachusetts Avenue NW., Washington, DC 20529-2140.

**FOR FURTHER INFORMATION CONTACT:** USCIS, Office of Policy and Strategy, Regulatory Coordination Division, Laura Dawkins, Chief, 20 Massachusetts Avenue NW., Washington, DC 20529-2140, telephone number 202-272-8377 (This is not a toll-free number. Comments are not accepted via telephone message). Please note contact information provided here is solely for questions regarding this notice. It is not for individual case status inquiries. Applicants seeking information about the status of their individual cases can check Case Status Online, available at the USCIS Web site at <http://www.uscis.gov>, or call the USCIS National Customer Service Center at 800-375-5283 (TTY 800-767-1833).

#### SUPPLEMENTARY INFORMATION:

##### Comments

You may access the information collection instrument with instructions, or additional information by visiting the Federal eRulemaking Portal site at: <http://www.regulations.gov> and enter USCIS-2006-0030 in the search box. Regardless of the method used for submitting comments or material, all submissions will be posted, without change, to the Federal eRulemaking Portal at <http://www.regulations.gov>, and will include any personal information you provide. Therefore, submitting this information makes it public. You may wish to consider limiting the amount of personal information that you provide in any voluntary submission you make to DHS. DHS may withhold information provided in comments from public viewing that it determines may impact the privacy of an individual or is offensive. For additional information, please read the Privacy Act notice that is available via the link in the footer of <http://www.regulations.gov>.

Written comments and suggestions from the public and affected agencies should address one or more of the following four points:

- (1) Evaluate whether the proposed collection of information is necessary for the proper performance of the functions of the agency, including whether the information will have practical utility;
- (2) Evaluate the accuracy of the agency's estimate of the burden of the proposed collection of information, including the validity of the methodology and assumptions used;
- (3) Enhance the quality, utility, and clarity of the information to be collected; and

(4) Minimize the burden of the collection of information on those who are to respond, including through the use of appropriate automated, electronic, mechanical, or other technological collection techniques or other forms of information technology, *e.g.*, permitting electronic submission of responses.

#### Overview of This Information Collection

(1) *Type of Information Collection:* Revision of a Currently Approved Collection.

(2) *Title of the Form/Collection:* Application to Preserve Residence for Naturalization.

(3) *Agency form number, if any, and the applicable component of the DHS sponsoring the collection:* N-470; USCIS.

(4) *Affected public who will be asked or required to respond, as well as a brief abstract:* Primary: Individuals or households. The information collected on Form N-470 will be used to determine whether an alien who intends to be absent from the United States for a period of one year or more is eligible to preserve residence for naturalization purposes.

(5) *An estimate of the total number of respondents and the amount of time estimated for an average respondent to respond:* The estimated total number of respondents for the information collection N-470 is 625 and the estimated hour burden per response is .6 hour for respondents via paper and .4 hour for respondents via MyUSCIS.

(6) *An estimate of the total public burden (in hours) associated with the collection:* The total estimated annual hour burden associated with this collection is 263 hours.

(7) *An estimate of the total public burden (in cost) associated with the collection:* The estimated total annual cost burden associated with this collection of information is 76,563.

Dated: July 1, 2015.

**Laura Dawkins,**

*Chief, Regulatory Coordination Division, Office of Policy and Strategy, U.S. Citizenship and Immigration Services, Department of Homeland Security.*

[FR Doc. 2015-17085 Filed 7-10-15; 8:45 am]

**BILLING CODE 9111-97-P**

**DEPARTMENT OF THE INTERIOR****Bureau of Land Management**

[LLWO600000.L1820000.XP0000]

**Renewal of Approved Information Collection; OMB Control No. 1004-0204****AGENCY:** Bureau of Land Management, Interior.**ACTION:** 60-Day notice and request for comments.

**SUMMARY:** In compliance with the Paperwork Reduction Act, the Bureau of Land Management (BLM) invites public comments on, and plans to request approval to continue, the collection of information from applicants for Resource Advisory Councils. The Office of Management and Budget (OMB) has assigned control number 1004-0204 to this information collection.

**DATES:** Please submit comments on the proposed information collection by September 11, 2015.

**ADDRESSES:** Comments may be submitted by mail, fax, or electronic mail.

Mail: U.S. Department of the Interior, Bureau of Land Management, 1849 C Street NW., Room 2134LM, Attention: Jean Sonneman, Washington, DC 20240.

Fax: to Jean Sonneman at 202-245-0050.

Electronic mail: [Jean\\_Sonneman@blm.gov](mailto:Jean_Sonneman@blm.gov).

Please indicate "Attn: 1004-0204" regardless of the form of your comments.

**FOR FURTHER INFORMATION CONTACT:**

Mark Purdy at 202-912-7635. Persons who use a telecommunication device for the deaf may call the Federal Information Relay Service at 1-800-877-8339, to leave a message for Mr. Purdy.

**SUPPLEMENTARY INFORMATION:** OMB regulations at 5 CFR part 1320, which implement provisions of the Paperwork Reduction Act, 44 U.S.C. 3501-3521, require that interested members of the public and affected agencies be given an opportunity to comment on information collection and recordkeeping activities (see 5 CFR 1320.8 (d) and 1320.12(a)). This notice identifies an information collection that the BLM plans to submit to OMB for approval. The Paperwork Reduction Act provides that an agency may not conduct or sponsor a collection of information unless it displays a currently valid OMB control number. Until OMB approves a collection of information, you are not obligated to respond.

The BLM will request a 3-year term of approval for this information collection activity. Comments are invited on: (1) The need for the collection of information for the performance of the functions of the agency; (2) the accuracy of the agency's burden estimates; (3) ways to enhance the quality, utility and clarity of the information collection; and (4) ways to minimize the information collection burden on respondents, such as use of automated means of collection of the information. A summary of the public comments will accompany our submission of the information collection requests to OMB.

Before including your address, phone number, email address, or other personal identifying information in your comment, you should be aware that your entire comment—including your personal identifying information—may be made publicly available at any time. While you can ask us in your comment to withhold your personal identifying information from public review, we cannot guarantee that we will be able to do so.

The following information pertains to this request:

*Title:* Bureau of Land Management Resource Advisory Council Application (43 CFR Subpart 1784).

*OMB Control Number:* 1004-0204.

*Summary:* This control number consists of one information collection activity. In an application form, the BLM seeks to collect information to determine education, training, and experience related to possible service on advisory committees established under the authority of Section 309 of the Federal Land Policy and Management Act (43 U.S.C. 1739), the Federal Advisory Committee Act, 5 U.S.C. App. 2, and 43 CFR Subpart 1784. The BLM refers to such advisory committees as Resource Advisory Councils (RACs). The information that the BLM collects is necessary to ensure that each RAC is structured to provide fair membership balance, as prescribed by each RAC's charter.

*Frequency of Collection:* On occasion.

*Forms:* Form 1120-19, Bureau of Land Management Resource Advisory Council Application.

*Estimated Number and Description of Respondents:* 245 applicants annually for possible service on RACs.

*Estimated Annual Burden Hours:* 980.

*Estimated Annual Non-Hour Costs:* None.

**Anna Atkinson,**

*Information Collection Clearance Officer (Acting), Bureau of Land Management.*

[FR Doc. 2015-17045 Filed 7-10-15; 8:45 am]

**BILLING CODE 4310-84-P**

**DEPARTMENT OF THE INTERIOR****Bureau of Land Management**

[LLNVC00000.L71220000.FR0000. LVTF1503840.15X; NVN093739; MO# 4500078799]

**Notice of Realty Action; Segregation of Public Land Located in Lyon County and Mineral County, Nevada****AGENCY:** Bureau of Land Management, Interior.**ACTION:** Notice.

**SUMMARY:** This notice serves to segregate the identified public lands located in Lyon County and Mineral County, Nevada for up to two years from appropriation pursuant to the public land laws, including location pursuant to the General Mining Act, subject to valid existing rights. The purpose of such segregation is to promote the orderly administration of the public lands identified in section 3009(a) of the National Defense Authorization Act, Public Law 113-291 (December 19, 2014).

**DATES:** Interested parties may submit written comments regarding the segregation to the Bureau of Land Management (BLM) on or before August 27, 2015.

**ADDRESSES:** Mail written comments to the BLM District Manager, Carson City District Office, 5665 Morgan Mill Road, Carson City, NV 89701.

**FOR FURTHER INFORMATION CONTACT:**

Perry Wickham, Realty Specialist, BLM Sierra Front Field Office at email: [pwickham@blm.gov](mailto:pwickham@blm.gov) or phone: 775-885-6017. Persons who use a telecommunications device for the deaf (TDD) may call the Federal Information Relay Service (FIRS) at 1-800-877-8339 to contact the above individual during normal business hours. The FIRS is available 24 hours a day, 7 days a week, to leave a message or question with the above individual. You will receive a reply during normal business hours.

**SUPPLEMENTARY INFORMATION:** The following described public land in Lyon County and Mineral County, Nevada, has been identified for conveyance to the city of Yerington (City) under the authority of section 3009 of the National Defense Authorization Act, Public Law 113-291, titled Land Conveyance to Yerington, Nevada.

Mount Diablo Meridian, Nevada.

Those public lands, located in Lyon County and Mineral County, Nevada, are identified on the map as "City of Yerington Sustainable Development Conveyance Lands."

The area described contains approximately 10,359 acres.

The conveyance of the public land will be subject to valid existing rights and encumbrances of record, including but not limited to, rights-of-way for roads and public utilities.

On July 13, 2015, the above described land will be segregated from appropriation under the public land laws, including the mining laws, for up to two years from the date of the publication of the notice, subject to valid existing rights, but would remain subject to the sale provisions of the Federal Land Policy and Management Act. Until completion of the sale, the BLM is no longer accepting land use applications affecting the identified public land, except applications for the amendment of previously-filed right-of-way applications or existing authorizations to increase the term of the grants in accordance with 43 CFR 2807.15 and 2886.15. The segregative effect will terminate upon issuance of a patent, publication in the **Federal Register** of a termination of the segregation, or on Thursday, July 13, 2017, whichever occurs first, unless extended by the BLM State Director in accordance with 43 CFR 2711.1–2(d) prior to the termination date.

**Public Comments:** For a period until August 27, 2015 interested parties and the general public may submit comments concerning segregation of lands to be conveyed to the City, including notification of any encumbrances or other claims relating to the conveyed lands, to District Manager, Carson City District Office, at the above address. Comments transmitted via email will not be accepted. Comments will be available for public review at the BLM Carson City District Office, during regular business hours, except holidays.

Before including your address, phone number, email address, or other personal identifying information in your comment, be advised that your entire comment—including your personal identifying information—may be made publicly available at any time. While you can ask us in your comment to withhold from public review your personal identifying information, we cannot guarantee that we will be able to do so.

**Authority:** 43 CFR 2711.1–2.

**Ralph Thomas,**

*District Manager, Carson City District Office.*

[FR Doc. 2015–17044 Filed 7–10–15; 8:45 am]

**BILLING CODE 4310–HC–P**

## LEGAL SERVICES CORPORATION

### Sunshine Act Meeting

**DATE AND TIME:** The Legal Services Corporation's Board of Directors and its six committees will meet July 16–18, 2015. On Thursday, July 16, the first meeting will commence at 12:45 p.m., Central Daylight Time (CDT), with the meeting thereafter commencing promptly upon adjournment of the immediately preceding meeting. On Friday, July 17, the first meeting will commence at 3:00 p.m., CDT, with the next meeting commencing at 4:15 p.m., CDT, and the meeting thereafter commencing promptly upon adjournment of the immediately preceding meeting. On Saturday, July 18, the first meeting will commence at 8:30 a.m., CDT, with the next meeting commencing at 9:00 a.m., CDT, and it will be followed by the closed session meeting of the Board of Directors which will commence promptly upon adjournment of the prior meeting.

**LOCATION:** Radisson Blu Norway Room, 35 South Seventh Street, Minneapolis, Minnesota 55402.

**PUBLIC OBSERVATION:** Unless otherwise noted herein, the Board and all committee meetings will be open to public observation. Members of the public who are unable to attend in person but wish to listen to the public proceedings may do so by following the telephone call-in directions provided below.

#### CALL-IN DIRECTIONS FOR OPEN SESSIONS:

- Call toll-free number: 1–866–451–4981;
- When prompted, enter the following numeric pass code: 5907707348.
- When connected to the call, please immediately “MUTE” your telephone.

Members of the public are asked to keep their telephones muted to eliminate background noises. To avoid disrupting the meeting, please refrain from placing the call on hold if doing so will trigger recorded music or other sound. From time to time, the presiding Chair may solicit comments from the public.

### MEETING SCHEDULE

	Time *
<b>Thursday, July 16, 2015</b>	
1. Operations & Regulations Committee.	12:45 p.m.
2. Audit Committee.	
3. Finance Committee.	
4. Governance & Performance Review Committee.	

### MEETING SCHEDULE—Continued

	Time *
<b>Friday, July 17, 2015</b>	
1. Delivery of Legal Services Committee.	3:00 p.m.
2. Institutional Advancement Committee.	
<b>Saturday, July 18, 2015</b>	
1. Institutional Advancement Committee Communication Subcommittee.	8:30 a.m.
2. Board of Directors.	

**STATUS OF MEETING:** Open, except as noted below.

Board of Directors—Open, except that, upon a vote of the Board of Directors, a portion of the meeting may be closed to the public to hear briefings by management and LSC's Inspector General, and to consider and act on the General Counsel's report on potential and pending litigation involving LSC, and on a list of prospective funders.\*\*

Institutional Advancement Committee—Open, except that, upon a vote of the Board of Directors, the meeting may be closed to the public to consider and act on recommendation of new prospective donors and to receive a briefing on the development report.\*\*

Audit Committee—Open, except that the meeting may be closed to the public to hear a briefing on the Office of Compliance and Enforcement's active enforcement matters.\*\*

Governance and Performance Review Committee—Open, except that the meeting may be closed to the public to consider and act on recommendation of new prospective funders, and to receive a briefing on the development report.\*\*

A verbatim written transcript will be made of the closed session of the Board, Institutional Advancement Committee, Audit Committee, and Governance and Performance Review Committee meetings. The transcript of any portions of the closed sessions falling within the relevant provisions of the Government in the Sunshine Act, 5 U.S.C. 552b(c)(6) and (10), will not be available for public inspection. A copy of the General Counsel's Certification that, in his opinion, the closing is authorized by law will be available upon request.

#### MATTERS TO BE CONSIDERED:

\* Please note that all times in this notice are in the *Central Daylight Time*.

\*\* Any portion of the closed session consisting solely of briefings does not fall within the Sunshine Act's definition of the term “meeting” and, therefore, the requirements of the Sunshine Act do not apply to such portion of the closed session. 5 U.S.C. 552b (a)(2) and (b). See also 45 CFR 1622.2 & 1622.3.

**July 16, 2015****OPERATIONS & REGULATIONS COMMITTEE**

1. Approval of agenda
2. Approval of minutes of the Committee's meeting of April 12, 2015
3. Update on changes to 45 CFR part 1610—Transfers of LSC Funds and 45 CFR part 1627—Subgrants and Membership Fees or Dues
  - Ron Flagg, General Counsel
  - Stefanie Davis, Assistant General Counsel
  - Mark Freedman, Senior Assistant General Counsel
4. Consider and act on Final Rule for 45 CFR part 1628—Recipient Fund Balances
  - Ron Flagg, General Counsel
  - Stefanie Davis, Assistant General Counsel
5. Consider and act on Proposed Rulemaking Agenda 2015—2016
  - Ron Flagg, General Counsel
  - Stefanie Davis, Assistant General Counsel
  - Mark Freedman, Senior Assistant General Counsel
  - Tom Hester, Associate Counsel to the Inspector General
6. Consider and act on updating the LSC Rulemaking Protocol
  - Ron Flagg, Vice President & General Counsel
  - Stefanie Davis, Assistant General Counsel
  - Mark Freedman, Senior Assistant General Counsel
7. Consider and act on initiating rulemaking for 45 CFR part 1630—Cost Standards and the Property Acquisition and Management Manual
  - Ron Flagg, General Counsel
  - Stefanie Davis, Assistant General Counsel
  - Mark Freedman, Senior Assistant General Counsel
8. Report on 2015 Grant Assurances
  - Jim Sandman, President
  - Public Comment
9. Consider and act on comments on population data for grants to serve agricultural workers
  - Ron Flagg, General Counsel
  - Bristow Hardin, Program Analyst
  - Mark Freedman, Senior Assistant General Counsel
  - Public Comment
10. Other public comment
11. Consider and act on other business
12. Consider and act on adjournment of meeting

**July 16, 2015****AUDIT COMMITTEE**

1. Approval of agenda

2. Approval of minutes of the Committee's meeting on April 13, 2015
3. Review of the Audit Committee Charter
4. Briefing by Office of Inspector General
  - Jeffrey Schanz, Inspector General
5. Management update regarding risk management
  - Ron Flagg, Vice President of Legal Affairs
6. Briefing about follow-up by Office of Compliance and Enforcement on referrals by the Office of Inspector General regarding audit reports and annual Independent Public audits of grantees
  - Lora Rath, Director of Compliance and Enforcement
  - John Seeba, Assistant Inspector General for Audits
7. Public comment
8. Consider and act on other business

**Closed Session**

9. Approval of minutes of the Committee's meeting on April 13, 2015
10. Briefing by Office of Compliance and Enforcement on active enforcement matter(s) and follow-up on open investigation referrals from the Office of Inspector General
  - Lora Rath, Director of Compliance and Enforcement
11. Consider and act on adjournment of meeting

**July 16, 2015****FINANCE COMMITTEE**

1. Approval of agenda
2. Approval of minutes of the Committee's telephonic meeting on June 15, 2015
3. Presentation of the LSC's Financial Report for the first eight months of FY 2015
  - David Richardson, Treasurer/Comptroller
4. Review of Internal Budgetary Adjustments for the FY 2015 Consolidated Operating Budget
  - David Richardson, Treasurer/Comptroller
5. Report on the FY 2016 appropriations process
  - Carol Bergman, Director of Government Relations & Public Affairs
6. Consider and act Temporary Operating Authority for FY 2016, *Resolution 2015-XXX*
  - David Richardson, Treasurer/Comptroller
7. Consider and act on FY 2017 Budget Request, *Resolution 2015-XXX*
  - Jim Sandman, President

- Carol Bergman, Director of Government Relations & Public affairs
  - Jeffrey Schanz, Inspector General
8. Public comment
  9. Consider and act on other business
  10. Consider and act on adjournment of meeting

**July 16, 2015****GOVERNANCE AND PERFORMANCE REVIEW COMMITTEE**

1. Approval of agenda
2. Approval of minutes of the Committee's meeting on April 13, 2015
3. Report on GAO inquiry
  - Carol Bergman, Director of Government Relations & Public Affairs
4. Report on foundation grants and LSC's research agenda
  - Jim Sandman, President
5. Public comment
6. Consider and act on other business
7. Consider and act on adjournment of meeting

**Closed Session**

8. Approval of minutes of the Committee's meeting on April 13, 2015
9. Development Report
10. Consider and act on prospective funders
  - Jim Sandman, President
11. Consider and act on motion to adjourn meeting

**July 17, 2015****DELIVERY OF LEGAL SERVICES COMMITTEE**

1. Approval of Agenda
2. Approval of minutes of the Committee's meeting on April 13, 2015
3. Panel presentation and Committee discussion on Providing legal services to Native American communities
  - Chris Allery, Supervising Attorney, Anishinabe Legal Services
  - Dorothy Alther, Executive Director, California Indian Legal Services
  - Ed Reinhardt, Senior Attorney, Legal Services of North Dakota
  - Sylvia Struss, Administrative Director, DNA—People's Legal Services
  - Colline Wahkinney-Keely, Executive Director, Oklahoma Indian Legal Services
  - Janet LaBella, Director, Office of Program Performance, Legal Services Corporation, (Moderator)
4. Public comment
5. Consider and act on other business
6. Consider and act on motion to adjourn the meeting

**July 17, 2015****INSTITUTIONAL ADVANCEMENT COMMITTEE****Open Session**

1. Approval of agenda
2. Approval of minutes of the Committee's meeting of April 14, 2015
3. Development activities update
4. Discussion of Protocol for the Allocation of Private Funds
5. Public comment
6. Consider and act on other business
7. Adjourn open session

**Closed Session**

1. Consider and act on agenda
2. Approval of minutes of the Committee's Closed Session meeting of April 14, 2015
3. Development report
4. Consider and act on prospective donors
5. Consider and act on adjournment of meeting

**July 18, 2015****COMMUNICATIONS SUBCOMMITTEE OF THE INSTITUTIONAL ADVANCEMENT COMMITTEE****Open Session**

1. Approval of agenda
2. LSC communications updates
3. Public comment
4. Consider and act on other business

**July 18, 2015****BOARD OF DIRECTORS****Open Session**

1. Pledge of Allegiance
2. Approval of agenda
3. Approval of minutes of the Board's Open Session meeting of April 15, 2015
4. Approval of minutes of the Board's Open Session telephonic meeting of May 22, 2015
5. Chairman's Report
6. Members' Report
7. President's Report
8. Inspector General's Report
9. Consider and act on the report of the Finance Committee
10. Consider and act on the report of the Audit Committee
11. Consider and act on the report of the Operations and Regulations Committee
12. Consider and act on the report of the Governance and Performance Review Committee
13. Consider and act on the report of the Institutional Advancement Committee
14. Consider and act on the report of the Delivery of Legal Services Committee

15. Consider and act on process for updating the 2012–2016 LSC Strategic Plan
16. Report on implementation of the Pro Bono Task Force Report and the Pro Bono Innovation Fund
17. Public comment
18. Consider and act on other business
19. Consider and act on whether to authorize an executive session of the Board to address items listed below, under Closed Session

**Closed Session**

20. Approval of minutes of the Board's Closed Session of April 14, 2015
21. Briefing by Management
22. Briefing by Inspector General
23. Consider and act on General Counsel's report on potential and pending litigation involving LSC
24. Consider and act on list of prospective funders
25. Consider and act on motion to adjourn meeting

**CONTACT PERSON FOR INFORMATION:**

Katherine Ward, Executive Assistant to the Vice President & General Counsel, at (202) 295–1500. Questions may be sent by electronic mail to [FR\\_NOTICE\\_QUESTIONS@lsc.gov](mailto:FR_NOTICE_QUESTIONS@lsc.gov).

**NON-CONFIDENTIAL MEETING MATERIALS:**

Non-confidential meeting materials will be made available in electronic format at least 24 hours in advance of the meeting on the LSC Web site, at <http://www.lsc.gov/board-directors/meetings/board-meeting-notices/non-confidential-materials-be-considered-open-session>.

**ACCESSIBILITY:** LSC complies with the American's with Disabilities Act and section 504 of the 1973 Rehabilitation Act. Upon request, meeting notices and materials will be made available in alternative formats to accommodate individuals with disabilities. Individuals who need other accommodations due to disability in order to attend the meeting in person or telephonically should contact Katherine Ward, at (202) 295–1500 or [FR\\_NOTICE\\_QUESTIONS@lsc.gov](mailto:FR_NOTICE_QUESTIONS@lsc.gov), at least 2 business days in advance of the meeting. If a request is made without advance notice, LSC will make every effort to accommodate the request but cannot guarantee that all requests can be fulfilled.

Dated: July 8, 2015.

**Katherine Ward,**

*Executive Assistant to the Vice President for Legal Affairs, General Counsel & Corporate Secretary.*

[FR Doc. 2015–17177 Filed 7–9–15; 11:15 am]

**BILLING CODE 7050–01–P**

**NATIONAL SCIENCE FOUNDATION****Sunshine Act Meeting; National Science Board**

The National Science Board's Executive Committee, pursuant to NSF regulations (45 CFR part 614), the National Science Foundation Act, as amended (42 U.S.C. 1862n–5), and the Government in the Sunshine Act (5 U.S.C. 552b), hereby gives notice of the scheduling of a teleconference for the transaction of National Science Board business, as follows:

**DATE & TIME:** Monday, July 20, 2015 at 2:00 p.m. EDT.

**SUBJECT MATTER:** (1) Chairman's opening remarks; (2) Discussion of agenda for the August 2015 meetings of the National Science Board; and (3) Approval of prior committee minutes.

**STATUS:** Open.

**LOCATION:** This meeting will be held by teleconference at the National Science Board Office, National Science Foundation, 4201 Wilson Blvd., Arlington, VA 22230. A public listening line will be available. Members of the public must contact the Board Office [call 703–292–7000 or send an email message to [nationalsciencebrd@nsf.gov](mailto:nationalsciencebrd@nsf.gov)] at least 24 hours prior to the teleconference for the public listening number.

**UPDATES & POINT OF CONTACT:** Please refer to the National Science Board Web site [www.nsf.gov/nsb](http://www.nsf.gov/nsb) for additional information. Meeting information and updates (time, place, subject matter or status of meeting) may be found at <http://www.nsf.gov/nsb/meetings/notices.jsp>. Point of contact for this meeting is: James Hamos, 4201 Wilson Blvd., Arlington, VA 22230. Email: [jhamos@nsf.gov](mailto:jhamos@nsf.gov).

**Kyscha Slater-Williams,**

*Program Specialist for the National Science Board.*

[FR Doc. 2015–17280 Filed 7–9–15; 4:15 pm]

**BILLING CODE 7555–01–P**

**NUCLEAR REGULATORY COMMISSION**

**[NRC–2014–0212]**

**Oversight of Counterfeit, Fraudulent, and Suspect Items in the Nuclear Industry**

**AGENCY:** Nuclear Regulatory Commission.

**ACTION:** Regulatory issue summary; issuance.

**SUMMARY:** The U.S. Nuclear Regulatory Commission (NRC) is issuing Regulatory

Issue Summary (RIS) 2015–08, “Oversight of Counterfeit, Fraudulent, and Suspect Items in the Nuclear Industry.” This RIS is intended to heighten awareness of existing NRC regulations and how they apply to the nuclear industry stakeholders’ oversight of counterfeit, fraudulent, and suspect items (CFSI). This RIS is addressed to all NRC’s licensees and certificate holders, Agreement State radiation control program directors, and state liaison officers, as well as addressees’ contractors and vendors.

**DATES:** The RIS is available as of July 13, 2015.

**ADDRESSES:** Please refer to Docket ID NRC–2014–0212 when contacting the NRC about the availability of information regarding this document. You may obtain publicly-available information related to this document using any of the following methods:

- *Federal Rulemaking Web site:* Go to <http://www.regulations.gov> and search for Docket ID NRC–2014–0212. Address questions about NRC dockets to Carol Gallagher; telephone: 301–415–3463; email: [Carol.Gallagher@nrc.gov](mailto:Carol.Gallagher@nrc.gov). For technical questions, contact the individual listed in the **FOR FURTHER INFORMATION CONTACT** section of this document.

- *NRC’s Agencywide Documents Access and Management System (ADAMS):* You may obtain publicly available documents online in the ADAMS Public Documents collection at <http://www.nrc.gov/reading-rm/adams.html>. To begin the search, select “ADAMS Public Documents” and then select “Begin Web-based ADAMS Search.” For problems with ADAMS, please contact the NRC’s Public Document Room (PDR) reference staff at 1–800–397–4209, 301–415–4737, or by email to [pdr.resource@nrc.gov](mailto:pdr.resource@nrc.gov). The ADAMS accession number for each document referenced in this document (if that document is available in ADAMS) is provided the first time that a document is referenced.

- *NRC’s PDR:* You may examine and purchase copies of public documents at the NRC’s PDR, Room O1–F21, One White Flint North, 11555 Rockville Pike, Rockville, Maryland 20852.

- This RIS is also available on the NRC’s public Web site at <http://www.nrc.gov/reading-rm/doc-collections/gen-comm/reg-issues/> (select “2015” and then select “RIS 2015–08”).

**FOR FURTHER INFORMATION CONTACT:** James Gaslevic, Office of New Reactors, U.S. Nuclear Regulatory Commission, Washington, DC 20555–0001; telephone: 301–415–2776, email: [James.Gaslevic@nrc.gov](mailto:James.Gaslevic@nrc.gov).

**SUPPLEMENTARY INFORMATION:** The NRC published a notice of opportunity for public comment on this RIS in the **Federal Register** (79 FR 59521) on October 2, 2014. The agency received comments from eight commenters. The staff considered all comments, which resulted in minor clarifications to the RIS. The evaluation of these comments and the resulting changes to the RIS are discussed in a publicly available memorandum that is in ADAMS under Accession No. ML15008A192.

Dated at Rockville, Maryland, this 7th day of July 2015.

For the Nuclear Regulatory Commission.

**Sheldon D. Stuchell,**

*Chief, Generic Communications Branch,  
Division of Policy and Rulemaking, Office  
of Nuclear Reactor Regulation.*

[FR Doc. 2015–16954 Filed 7–10–15; 8:45 am]

**BILLING CODE 7590–01–P**

## NUCLEAR REGULATORY COMMISSION

[NRC–2015–0001]

### Sunshine Act Meeting Notice

**DATE:** July 13, 20, 27, August 3, 10, 17, 2015.

**PLACE:** Commissioners’ Conference Room, 11555 Rockville Pike, Rockville, Maryland.

**STATUS:** Public and Closed.

#### Week of July 13, 2015

There are no meetings scheduled for the week of July 13, 2015.

#### Week of July 20, 2015—Tentative

There are no meetings scheduled for the week of July 20, 2015.

#### Week of July 27, 2015—Tentative

There are no meetings scheduled for the week of July 27, 2015.

#### Week of August 3, 2015—Tentative

*Thursday, August 6, 2015*

9:30 a.m. Strategic Programmatic Overview of the Operating Reactors Business Line (Public Meeting); (Contact: Nathan Sanfilippo: 301–415–8744).

This meeting will be webcast live at the Web address—<http://www.nrc.gov/>.

#### Week of August 10, 2015—Tentative

*Thursday, August 13, 2015*

9:00 a.m. Briefing on Greater-Than-Class-C Low-Level Radioactive Waste (Public Meeting); (Contact: Gregory Suber—301–415–8087).

This meeting will be webcast live at the Web address—<http://www.nrc.gov/>.

### Week of August 17, 2015—Tentative

There are no meetings scheduled for the week of August 17, 2015.

\* \* \* \* \*

The schedule for Commission meetings is subject to change on short notice. For more information or to verify the status of meetings, contact Glenn Ellmers at 301–415–0442 or via email at [Glenn.Ellmers@nrc.gov](mailto:Glenn.Ellmers@nrc.gov).

\* \* \* \* \*

The NRC Commission Meeting Schedule can be found on the Internet at: <http://www.nrc.gov/public-involve/public-meetings/schedule.html>.

\* \* \* \* \*

The NRC provides reasonable accommodation to individuals with disabilities where appropriate. If you need a reasonable accommodation to participate in these public meetings, or need this meeting notice or the transcript or other information from the public meetings in another format (e.g. braille, large print), please notify Kimberly Meyer, NRC Disability Program Manager, at 301–287–0727, by videophone at 240–428–3217, or by email at [Kimberly.Meyer-Chambers@nrc.gov](mailto:Kimberly.Meyer-Chambers@nrc.gov). Determinations on requests for reasonable accommodation will be made on a case-by-case basis.

\* \* \* \* \*

Members of the public may request to receive this information electronically. If you would like to be added to the distribution, please contact the Nuclear Regulatory Commission, Office of the Secretary, Washington, DC 20555 (301–415–1969), or email [Brenda.Akstulewicz@nrc.gov](mailto:Brenda.Akstulewicz@nrc.gov) or [Patricia.Jimenez@nrc.gov](mailto:Patricia.Jimenez@nrc.gov).

Dated: July 9, 2015.

**Glenn Ellmers,**

*Policy Coordinator, Office of the Secretary.*

[FR Doc. 2015–17276 Filed 7–9–15; 4:15 pm]

**BILLING CODE 7590–01–P**

## NUCLEAR REGULATORY COMMISSION

[NRC–2014–0210]

### Regulatory Guide 8.11, Revision 1, Applications of Bioassay for Uranium

**AGENCY:** Nuclear Regulatory Commission.

**ACTION:** Regulatory guide; issuance.

**SUMMARY:** The U.S. Nuclear Regulatory Commission (NRC) is issuing Revision 1 to Regulatory Guide (RG) 8.11, “Applications of Bioassay for Uranium.” This guide provides methods that the NRC staff considers acceptable for the development and



implementation of a bioassay program for monitoring the intake of mixtures of uranium isotopes by occupationally exposed workers. This guide applies to licenses issued under "Domestic Licensing of Special Nuclear Material."

**ADDRESSES:** Please refer to Docket ID NRC-2014-0210 when contacting the NRC about the availability of information regarding this document. You may access information related to this document, which the NRC possesses and is publicly available, using any of the following methods:

- *Federal Rulemaking Web site:* Go to <http://www.regulations.gov> and search for Docket ID NRC-2014-0210. Address questions about NRC dockets to Carol Gallagher; telephone: 301-415-3463; email: [Carol.Gallagher@nrc.gov](mailto:Carol.Gallagher@nrc.gov).

- *NRC's Agencywide Documents Access and Management System (ADAMS):* You may obtain publicly-available documents online in the ADAMS Public Document collection at <http://www.nrc.gov/reading-rm/adams.html>. To begin the search, select "ADAMS Public Documents" and then select "Begin Web-based ADAMS Search." For problems with ADAMS, please contact the NRC's Public Document Room (PDR) reference staff at 1-800-397-4209, 301-415-4737, or by email to [pdr.resource@nrc.gov](mailto:pdr.resource@nrc.gov). The ADAMS accession number for each document referenced in this notice (if that document is available in ADAMS) is provided the first time that a document is referenced. Revision 1 of RG 8.11 is available in ADAMS under Accession No. ML15054A618. The regulatory analysis may be found in ADAMS under Accession No. ML14133A612.

- *NRC's PDR:* You may examine and purchase copies of public documents at the NRC's PDR, Room O1-F21, One White Flint North, 11555 Rockville Pike, Rockville, Maryland 20852.

Regulatory guides are not copyrighted, and NRC approval is not required to reproduce them.

**FOR FURTHER INFORMATION CONTACT:** Harriet Karagiannis, telephone: 301-251-7477; email: [Harriet.Karagiannis@nrc.gov](mailto:Harriet.Karagiannis@nrc.gov) or Casper Sun, telephone: 301-251-7912; email: [Casper.Sun@nrc.gov](mailto:Casper.Sun@nrc.gov). Both are staff of the Office of Nuclear Regulatory Research, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001.

#### **SUPPLEMENTARY INFORMATION:**

##### **I. Introduction**

The NRC is issuing a revision to an existing guide in the NRC's "Regulatory Guide" series. This series was developed to describe and make

available to the public information regarding methods that are acceptable to the NRC staff for implementing specific parts of the agency's regulations, techniques that the staff uses in evaluating specific issues or postulated events, and data that the staff needs in its review of applications for permits and licenses, or for amendments to such permits and licenses. The draft Revision 1 of RG 8.11 was issued with a temporary identification as Draft Regulatory Guide, DG-8054 and published in the **Federal Register** to obtain public comments (79 FR 60190; October 6, 2014).

The NRC issued the initial version of RG 8.11 in June 1974 to provide guidance to NRC licensees on methods the staff found acceptable to demonstrate compliance with the then current version of NRC's radiation protection regulations in 10 CFR part 20. In 1991 the NRC promulgated amendments to its 10 CFR part 20 regulations (56 FR 23360; May 21, 1991). The 1991 rulemaking included substantive amendments to the 10 CFR part 20 regulations as well as a renumbering of those regulations. As such, this revision (Revision 1) to the guide updates the guide's cross-references to the current 10 CFR part 20 regulations.

In addition, the guide endorses for use certain sections of a voluntary consensus standard, namely, the American National Standards Institute/Health Physics Society N13.22-2013 standard, "Bioassay Programs for Uranium," as a means for licensees to demonstrate compliance with the NRC regulations, 10 CFR 20.1201, "Occupational Dose Limits for Adults," and 10 CFR 20.1204, "Determination of Internal Exposure." Specifically, 10 CFR 20.1201(e) requires NRC licensees to limit the soluble uranium intake to an occupational worker to 10 milligrams in a week, in addition to annual occupational dose limits, and 10 CFR 20.1204(a) requires NRC licensees to take suitable and timely measurements of the concentrations of radioactive materials in air in work areas and the quantities of radionuclides in the bodies of occupational workers. Finally, this guide identifies the bioassay interpretation methods in the NRC document NUREG/CR-4884, "Interpretation of Bioassay Measurement," as an acceptable method to comply with NRC requirements.

##### **II. Additional Information**

DG-8054 was published in the *Federal Register* (79 FR 60190; October 6, 2014) for a 60-day public comment period. The public comment period

closed on December 5, 2014. The NRC received one comment submission. This comment submission and the staff responses to the comments set forth in that comment submission are available under ADAMS Accession Number ML15014A269.

##### **III. Congressional Review Act**

This regulatory guide is a rule as defined in the Congressional Review Act (5 U.S.C. 801-808). However, the Office of Management and Budget has not found it to be a major rule as defined in the Congressional Review Act.

##### **IV. Backfitting**

Licensees may voluntarily use the guidance in this regulatory guide (Revision 1 of RG 8.11) to demonstrate compliance with the underlying NRC regulations. Methods or solutions that differ from those described in this regulatory guide may be deemed acceptable if they provide sufficient basis and information for the NRC staff to verify that the proposed alternative demonstrates compliance with the appropriate NRC regulations. Current licensees (*i.e.*, persons holding a NRC issued license as of the date of issuance of this regulatory guide) may continue to use guidance the NRC found acceptable for complying with the identified regulations as long as their current licensing basis remains unchanged. The acceptable guidance may be from the previous version of this regulatory guide. Licensees may use the information in this regulatory guide for actions which do not require NRC review and approval. Licensees may also use the information in this regulatory guide to resolve regulatory or inspection issues.

The NRC staff does not intend or approve any imposition or backfitting of the guidance in this regulatory guide (see 10 CFR 70.76, "Backfitting"). The NRC staff does not expect any current licensee to use or commit to using the guidance in this regulatory guide, unless such licensee makes a change to its licensing basis. The NRC staff does not expect or plan to initiate NRC regulatory action that would require the use of this regulatory guide. Examples of such regulatory actions include the issuance of an order or generic communication, or the promulgation of a rule, requiring the use of this regulatory guide without further backfit consideration.

During regulatory discussions on licensee-specific operational issues, the NRC staff may discuss with licensees various actions consistent with staff positions in this regulatory guide, as one acceptable means of meeting the

underlying NRC regulatory requirements. Such discussions would not ordinarily be considered backfitting, even if prior versions of this regulatory guide are part of the licensee's licensing basis. However, unless this regulatory guide is part of the licensee's licensing basis, the staff may not represent to the licensee that the licensee's failure to comply with the positions in this regulatory guide constitutes a violation.

If a current licensee voluntarily seeks a license amendment or change and (1) the NRC staff's consideration of the request involves a regulatory issue directly relevant to this regulatory guide and (2) the specific subject matter of this regulatory guide is an essential consideration in the staff's determination of the acceptability of the licensee's request, then the staff may request that the licensee either follow the guidance in this regulatory guide or provide an equivalent alternative process that demonstrates compliance with the underlying NRC regulatory requirements. Such a request by the NRC staff is not considered backfitting as defined in 10 CFR 70.76(a)(1).

If a licensee believes that the NRC is either using this regulatory guide or requesting or requiring the licensee to implement the methods or processes in this regulatory guide in a manner inconsistent with the discussion in the Implementation section of this regulatory guide, then the licensee may file a backfit appeal with the NRC in accordance with the guidance in NRC Management Directive 8.4, "Management of Facility-Specific Backfitting and Information Collection" and NUREG-1409, "Backfitting Guidelines."

Dated at Rockville, Maryland, this 8th day of July, 2015.

For the Nuclear Regulatory Commission.

**Carol Moyer,**

*Acting Branch Chief, Regulatory Guidance and Generic Issues Branch, Division of Engineering, Office of Nuclear Regulatory Research.*

[FR Doc. 2015-17018 Filed 7-10-15; 8:45 am]

**BILLING CODE 7590-01-P**

## SECURITIES AND EXCHANGE COMMISSION

[Release No. 34-75373; File No. SR-CBOE-2015-063]

### Self-Regulatory Organizations; Chicago Board Options Exchange, Incorporated; Notice of Filing and Immediate Effectiveness of a Proposed Rule Change Relating to Rule 6.49A

July 7, 2015.

Pursuant to Section 19(b)(1) of the Securities Exchange Act of 1934 (the "Act"),<sup>1</sup> and Rule 19b-4 thereunder,<sup>2</sup> notice is hereby given that on June 24, 2015, Chicago Board Options Exchange, Incorporated (the "Exchange" or "CBOE") filed with the Securities and Exchange Commission (the "Commission") the proposed rule change as described in Items I, II, and III below, which Items have been prepared by the Exchange. The Exchange filed the proposal as a "non-controversial" proposed rule change pursuant to Section 19(b)(3)(A)(iii) of the Act<sup>3</sup> and Rule 19b-4(f)(6) thereunder.<sup>4</sup> The Commission is publishing this notice to solicit comments on the proposed rule change from interested persons.

#### I. Self-Regulatory Organization's Statement of the Terms of the Substance of the Proposed Rule Change

The Exchange p [sic] proposes to amend its Rule 6.49A relating to the transfer of positions. The text of the proposed rule change is provided below.

(additions are *italicized*; deletions are [bracketed])

\* \* \* \* \*

Chicago Board Options Exchange, Incorporated Rules

\* \* \* \* \*

#### Rule 6.49A. Transfer of Positions

(a)-(b) No change.

(c) *Transfer Procedure.*

(1)-(8) No change.

(9) Any Request for Quotes that is to be submitted later than 12:30[0] p.m. (*or two and one half hours prior to an early scheduled close*) must have the approval of the President of the Exchange to have a Request Response Time of less than two hours. In no event may a Request for Quotes be submitted to the floor later than 2:30 p.m. (*or thirty minutes prior to an early scheduled close*).

<sup>1</sup> 15 U.S.C. 78s(b)(1).

<sup>2</sup> 17 CFR 240.19b-4.

<sup>3</sup> 15 U.S.C. 78s(b)(3)(A)(iii).

<sup>4</sup> 17 CFR 240.19b-4(f)(6).

(10)-(13) No change.

(d) No change.

. . . *Interpretations and Policies:*  
.01-.03 No change.

\* \* \* \* \*

The text of the proposed rule change is also available on the Exchange's Web site (<http://www.cboe.com/AboutCBOE/CBOELegalRegulatoryHome.aspx>), at the Exchange's Office of the Secretary, and at the Commission's Public Reference Room.

#### II. Self-Regulatory Organization's Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change

In its filing with the Commission, the Exchange included statements concerning the purpose of and basis for the proposed rule change and discussed any comments it received on the proposed rule change. The text of these statements may be examined at the places specified in Item IV below. The Exchange has prepared summaries, set forth in sections A, B, and C below, of the most significant aspects of such statements.

##### A. Self-Regulatory Organization's Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change

###### 1. Purpose

Rule 6.49A describes the circumstances under which Trading Permit Holders may transfer positions and the on- and off-floor procedures for a transfer of positions. Pursuant to subparagraph (c), an on-floor transfer of positions must be represented to the trading crowd pursuant to a request for quotes and can be completed after a two-hour response time (or different time if approved by the Exchange President pursuant to subparagraph (c)(8)). Subparagraph (c)(6) indicates that transfer packages offered on the floor are subject to FLEX trading procedures in Rule 24A.5(a) through (c) or Rule 24B.5(a)(2)(i) through (iii). Pursuant to Rule 24A.5(a) or Rule 24B.5(a)(2), the submission of a request for quotes must use the forms, formats, procedures and time frames established by the Exchange. On receipt of a request for quotes in proper form, the Exchange official will initiate the request for quotes by communicating the terms and specifications on and off the floor.

Rule 6.49A(c)(9) currently provides that a submission of a request for quotes for a transfer package later than 1:00 p.m. require the approval of the President of the Exchange (as that would result in a response time of less than two hours). Additionally, Rule

6.49A(c)(9) provides that no requests for quotes for transfer packages may be submitted to the floor later than 2:30 p.m. Because the request for quotes procedures described above provide that a request for quotes must be in proper form before the Exchange initiates it, the Exchange needs time to review the materials submitted to determine that the request is in proper form. However, if a request for quotes is submitted near the 1:00 p.m. cut-off time, the Exchange may not have sufficient time to conduct this review and complete its procedures to initiate the request for quotes by 1:00 p.m. to allow the full two-hour response time in accordance with Rule 6.49A. If the review cannot be completed by 1:00 p.m., then the Exchange President would need to approve initiation of the request for quotes that trading day, which could further delay the process. To ensure the Exchange has sufficient time to determine that a request for quotes submission is in proper form and to initiate the request for quotes, the Exchange proposes to amend Rule 6.49A(c)(9) to require that requests for quotes be submitted by 12:30 p.m.<sup>5</sup> (or two and one half hours prior to an early scheduled close). This proposed rule change provides the Exchange with sufficient time to complete its review and initiate requests for quotes to allow the full two-hour response time for the trading crowd to submit quotes in accordance with Rule 6.49A (without the potential delay of obtaining approval of the Exchange President).

## 2. Statutory Basis

The Exchange believes the proposed rule change is consistent with the Act and the rules and regulations thereunder applicable to the Exchange and, in particular, the requirements of Section 6(b) of the Act.<sup>6</sup> Specifically, the Exchange believes the proposed rule change is consistent with the Section 6(b)(5)<sup>7</sup> requirements that the rules of an exchange be designed to prevent fraudulent and manipulative acts and practices, to promote just and equitable principles of trade, to foster cooperation and coordination with persons engaged in regulating, clearing, settling, processing information with respect to, and facilitating transactions in securities, to remove impediments to and perfect the mechanism of a free and

open market and a national market system, and, in general, to protect investors and the public interest. Additionally, the Exchange believes the proposed rule change is consistent with the Section 6(b)(5)<sup>8</sup> requirement that the rules of an exchange not be designed to permit unfair discrimination between customers, issuers, brokers, or dealers.

In particular, the Exchange believes that the proposed rule change will promote just and equitable principles of trade by ensuring that the Exchange has sufficient time to review submissions of requests for quotes to determine whether they are in proper form and complete its procedures to initiate a request for quotes. Additionally, the proposed rule change will protect investors because it will ensure this review is completed in time to provide the trading crowd with the full two-hour period during which it can submit quotes in accordance with Rule 6.49A (without the potential delay of obtaining approval of the Exchange President).

### *B. Self-Regulatory Organization's Statement on Burden on Competition*

CBOE does not believe that the proposed rule change will impose any burden on competition that is not necessary or appropriate in furtherance of the purposes of the Act. The proposed rule change slightly modifies the cut-off time for submission of requests for quotes for on-floor position transfers to provide the Exchange with sufficient time to review the request for quotes and determine whether it is in proper form prior to the initiation of the request for response time. All submissions of requests for quotes will be subject to the same revised cut-off time. While the proposed rule change requires requests for quotes to be submitted to the Exchange earlier, any potential burden imposed by this earlier cut-off time is offset by the benefits of ensuring that requests for quotes are submitted in proper form and that the trading crowd receives the full two hour response time to submit quotes for the transfer package. To the extent the Exchange receives a submission after the revised cut-off time, the rule still permits the Exchange to accept it and begin the shortened request for quotes with approval of the President.

### *C. Self-Regulatory Organization's Statement on Comments on the Proposed Rule Change Received From Members, Participants, or Others*

The Exchange neither solicited nor received comments on the proposed rule change.

## III. Date of Effectiveness of the Proposed Rule Change and Timing for Commission Action

Because the foregoing proposed rule change does not:

A. Significantly affect the protection of investors or the public interest;

B. impose any significant burden on competition; and

C. become operative for 30 days from the date on which it was filed, or such shorter time as the Commission may designate, it has become effective pursuant to Section 19(b)(3)(A) of the Act<sup>9</sup> and Rule 19b-4(f)(6)<sup>10</sup> thereunder. At any time within 60 days of the filing of the proposed rule change, the Commission summarily may temporarily suspend such rule change if it appears to the Commission that such action is necessary or appropriate in the public interest, for the protection of investors, or otherwise in furtherance of the purposes of the Act. If the Commission takes such action, the Commission will institute proceedings to determine whether the proposed rule change should be approved or disapproved.

## IV. Solicitation of Comments

Interested persons are invited to submit written data, views, and arguments concerning the foregoing, including whether the proposed rule change is consistent with the Act. Comments may be submitted by any of the following methods:

### *Electronic Comments*

- Use the Commission's Internet comment form (<http://www.sec.gov/rules/sro.shtml>); or
- Send an email to [rule-comments@sec.gov](mailto:rule-comments@sec.gov). Please include File Number SR-CBOE-2015-063 on the subject line.

### *Paper Comments*

- Send paper comments in triplicate to Secretary, Securities and Exchange Commission, 100 F Street NE., Washington, DC 20549-1090.

All submissions should refer to File Number SR-CBOE-2015-063. This file number should be included on the subject line if email is used. To help the Commission process and review your comments more efficiently, please use only one method. The Commission will post all comments on the Commission's Internet Web site (<http://www.sec.gov/rules/sro.shtml>). Copies of the submission, all subsequent amendments, all written statements with respect to the proposed rule change that are filed with the

<sup>5</sup> The proposed rule change also adds corresponding cut-off times for submissions of requests for quotes to the Exchange for review, as well as the latest a request for quotes may be submitted to the floor, when the Exchange is scheduled to close early (such as trading days immediately preceding certain holidays).

<sup>6</sup> 15 U.S.C. 78f(b).

<sup>7</sup> 15 U.S.C. 78f(b)(5).

<sup>8</sup> *Id.*

<sup>9</sup> 15 U.S.C. 78s(b)(3)(A).

<sup>10</sup> 17 CFR 240.19b-4(f)(6).

Commission, and all written communications relating to the proposed rule change between the Commission and any person, other than those that may be withheld from the public in accordance with the provisions of 5 U.S.C. 552, will be available for Web site viewing and printing in the Commission's Public Reference Room, 100 F Street NE., Washington, DC 20549 on official business days between the hours of 10:00 a.m. and 3:00 p.m. Copies of such filing also will be available for inspection and copying at the principal office of the Exchange. All comments received will be posted without change; the Commission does not edit personal identifying information from submissions. You should submit only information that you wish to make available publicly. All submissions should refer to File Number SR-CBOE-2015-063, and should be submitted on or before August 3, 2015.

For the Commission, by the Division of Trading and Markets, pursuant to delegated authority.<sup>11</sup>

**Brent J. Fields,**

*Secretary.*

[FR Doc. 2015-16974 Filed 7-10-15; 8:45 am]

**BILLING CODE 8011-01-P**

## SECURITIES AND EXCHANGE COMMISSION

[Release No. 34-75377; File No. SR-FINRA-2015-022]

### Self-Regulatory Organizations; Financial Industry Regulatory Authority, Inc.; Notice of Filing of a Proposed Rule Change to Amend FINRA Rule 2210 (Communications with the Public)

July 7, 2015.

Pursuant to Section 19(b)(1) of the Securities Exchange Act of 1934 ("Act")<sup>1</sup> and Rule 19b-4 thereunder,<sup>2</sup> notice is hereby given that on June 29, 2015, Financial Industry Regulatory Authority, Inc. ("FINRA") filed with the Securities and Exchange Commission ("SEC" or "Commission") the proposed rule change as described in Items I and II below, which Items have been prepared by FINRA. The Commission is publishing this notice to solicit comments on the proposed rule change from interested persons.

### I. Self-Regulatory Organization's Statement of the Terms of Substance of the Proposed Rule Change

FINRA is proposing to amend FINRA Rule 2210 to require each of a member's Web sites to include a readily apparent reference and hyperlink to BrokerCheck on: (i) The initial Web page that the member intends to be viewed by retail investors; and (ii) any other Web page that includes a professional profile of one or more registered persons who conduct [sic] business with retail investors. These requirements would not apply to a member that does not provide products or services to retail investors, or to a directory or list of registered persons limited to names and contact information.

The text of the proposed rule change is available on FINRA's Web site at <http://www.finra.org>, at the principal office of FINRA and at the Commission's Public Reference Room.

### II. Self-Regulatory Organization's Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change

In its filing with the Commission, FINRA included statements concerning the purpose of and basis for the proposed rule change and discussed any comments it received on the proposed rule change. The text of these statements may be examined at the places specified in Item IV below. FINRA has prepared summaries, set forth in sections A, B, and C below, of the most significant aspects of such statements.

#### A. Self-Regulatory Organization's Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change

##### 1. Purpose

FINRA established BrokerCheck in 1988 (then known as the Public Disclosure Program) to provide the public with information on the professional background, business practices, and conduct of FINRA members and their associated persons. The information that FINRA releases to the public through BrokerCheck is derived from the Central Registration Depository ("CRD®"), the securities industry online registration and licensing database. FINRA members, their associated persons and regulators report information to the CRD system via the uniform registration forms. By making most of this information publicly available, BrokerCheck, among other things, helps investors make informed choices about the individuals and firms with which they conduct business.

In January 2013, FINRA filed with the SEC a proposed rule change to amend FINRA Rule 2267 (Investor Education and Protection)<sup>3</sup> to require all members to include a prominent description of and link to BrokerCheck on their Web sites, social media pages and any comparable Internet presence, as well as on the Web sites, social media pages and any comparable Internet presence relating to a member's investment banking or securities business maintained by or on behalf of any person associated with a member.<sup>4</sup> The proposed rule change was intended to increase investor awareness and use of BrokerCheck. The Commission received 24 comment letters in response to the proposed rule change. FINRA withdrew the filing to better understand commenters' concerns regarding the challenges of implementing the proposed rule change.

Many of the comments received on the 2013 proposed rule change expressed concern with the challenges of implementing the proposal with respect to social media pages, the lack of guidance with respect to terms and phrases in the proposed amendments, and the disadvantages of using a "deep" link to BrokerCheck summary reports that would bypass the BrokerCheck homepage.<sup>5</sup> Commenters suggested that the link to BrokerCheck be required initially for member Web sites, where its implementation would be relatively straightforward, and that the value of the link be assessed first in that context before expanding to third party sites.

In light of commenters' concerns, FINRA has developed a revised proposal that addresses member Web sites. Specifically, the revised proposal would amend FINRA Rule 2210 (Communications with the Public) to require each of a member's Web sites to include a readily apparent reference and hyperlink to BrokerCheck on: (i) The initial Web page that the member intends to be viewed by retail investors; and (ii) any other Web page that includes a professional profile of one or more registered persons who conduct

<sup>3</sup> Subject to limited exceptions, FINRA Rule 2267(a) requires members to provide annually in writing to each of their customers the BrokerCheck hotline number, the FINRA Web site address, and a notification of the availability of an investor brochure that describes BrokerCheck.

<sup>4</sup> See Securities Exchange Act Release No. 68700 (January 18, 2013), 78 FR 5542 (January 25, 2013) (Notice of Filing of SR-FINRA-2013-002). See also *infra* Item I.C. of the filing for further discussion of the 2013 filing and prior proposals.

<sup>5</sup> The SEC also received numerous comment letters that raised issues outside the scope of the proposed rule change to FINRA Rule 2267. These comment letters focused generally on concerns regarding the current operation and display of BrokerCheck reports.

<sup>11</sup> 17 CFR 200.30-3(a)(12).

<sup>1</sup> 15 U.S.C. 78s(b)(1).

<sup>2</sup> 17 CFR 240.19b-4.

[sic] business with retail investors. The proposal would not apply to a member that does not provide products or services to retail investors, or a directory or list of registered persons limited to names and contact information.

FINRA believes that the revised proposal addresses many of the commenters' concerns on the original proposal to amend Rule 2267. By incorporating the proposed rule change into the regulatory framework for communications with the public, the revised proposal would group the proposed requirement with other related standards that apply to member Web sites. By excluding those members that do not provide products and services to retail investors, the revised proposal is more aligned with its goal of increasing retail investor awareness and usage of BrokerCheck. FINRA also believes that the revised proposal should reduce the potential burden on members by clarifying that the requirement would not apply to directory pages limited to registered persons' names and contact information, since firms would not need to include as many links to BrokerCheck on their Web sites.

The revised proposal also responds to commenters' concerns with respect to communications on third-party sites that are not controlled by the member, such as social media sites, by limiting its application to Web sites of the member, rather than applying its requirements to third-party sites, such as social media sites, which the member does not control. The revised proposal also no longer requires a deep link to the BrokerCheck report of a member or registered person; instead, it would require a link to the BrokerCheck homepage.

FINRA will announce the implementation date of the proposed rule change in a *Regulatory Notice* to be published no later than 60 days following Commission approval. The effective date will be no later than 180 days following publication of the *Regulatory Notice* announcing Commission approval.

## 2. Statutory Basis

FINRA believes that the proposed rule change is consistent with the provisions of Section 15A(b)(6) of the Act,<sup>6</sup> which requires, among other things, that FINRA rules must be designed to prevent fraudulent and manipulative acts and practices, to promote just and equitable principles of trade, and, in general, to protect investors and the public interest. FINRA believes that the proposed rule change will help protect

investors by making them aware of information available on BrokerCheck by requiring links to BrokerCheck on member Web sites.

### B. Self-Regulatory Organization's Statement on Burden on Competition

FINRA does not believe that the proposed rule change will result in any burden on competition that is not necessary or appropriate in furtherance of the purposes of the Act. FINRA recognizes that the proposed rule change would impose burdens on members associated with implementing references and hyperlinks to BrokerCheck on their Web sites and to keep those references and hyperlinks current. However, FINRA believes that by limiting the application of the proposal only to a member's own Web sites, the revised proposal significantly reduces these implementation costs for members, while maintaining the proposal's investor protection goals.

FINRA has undertaken an economic impact assessment, as set forth below, to analyze the regulatory need for the proposed rulemaking, its potential economic impacts, including anticipated costs and benefits, and the alternatives FINRA considered in assessing how to best meet its regulatory objectives.

## Economic Impact Assessment

### A. Regulatory Need

BrokerCheck provides investors with information on the professional background, business practices, regulatory history, and conduct of members and their associated persons. Among other things, BrokerCheck helps investors make well-informed choices about the individuals and firms with which they conduct business. FINRA believes that the need for greater investor awareness and access to BrokerCheck continues to be important to protect investors. The proposed rule change will help increase investor awareness and make it easier for investors to find BrokerCheck by requiring references and hyperlinks to BrokerCheck on member Web sites.

### B. Economic Impacts

#### (i) Anticipated Benefits

FINRA believes that BrokerCheck serves as a critical source of information for investors and considers BrokerCheck to be among the first resources they should turn to when choosing whether to do business with a particular firm or registered person. BrokerCheck enables investors to search for and download information on professional background and regulatory history of members and

their registered persons, thereby reducing the direct and indirect costs associated with acquiring valuable information about the members and their registered persons ("search costs").<sup>7</sup> As discussed above, the proposed rule will increase investor awareness and the likely usage of BrokerCheck. By making more investors aware of the information available on BrokerCheck, the proposed rule will make investors' searches for information about firms and registered persons more efficient and will help them make more informed decisions about whether to do business with a particular firm or registered person, thereby enhancing investor protection.

#### (ii) Anticipated Costs

The proposed rule change will impose costs on members that provide products and services to retail investors, which FINRA estimates to be approximately 3,800 members.<sup>8</sup> These members would incur costs associated with identifying the Web pages that would need to be updated based upon this proposed rule and determining where to place the references and hyperlinks within these Web pages, updating the required Web pages, as well as testing and deploying the updated Web site. In addition, these members would incur costs associated with maintaining the links on their Web pages and updating their policies and procedures to ensure ongoing compliance as their Web sites are updated or new Web pages are added over time. Members would have flexibility on how best to link to BrokerCheck, which is intended to

<sup>7</sup> Search costs encompass the time, energy and money expended by a consumer who is researching a product or service for purchase. See, e.g., Meir G. Kohn & Steven Shavell, *The Theory of Search*, 9 *Journal of Economic Theory* 93 (1974); Simon P. Anderson & Regis Renault, *Pricing, Product Diversity, and Search Costs: A Bertrand-Chamberlin-Diamond Model*, 30, No. 4 *The RAND Journal of Economics* 719 (1999).

<sup>8</sup> FINRA's estimate is based on the types of business in which members are engaged (based on information provided in response to Question 12 on Form BD). FINRA identified businesses that are generally associated with products and services for retail investors and estimates that approximately 3,800 members are engaged in such retail-oriented businesses. FINRA notes that this estimate includes members engaged in private placements of securities. Form BD information identifies members engaged in private placements but does not distinguish between those who conduct private placement of securities with retail versus institutional investors as those terms are defined in Rule 2210. However, based on staff experience, FINRA believes that a significant portion of the members engaged in private placements provide products and services to retail investors. Nonetheless, FINRA notes that the estimates in this proposal could be overstated and serve as an upper-bound for the number of impacted members and the corresponding aggregate cost estimates, discussed below.

<sup>6</sup> 15 U.S.C. 78o-3(b)(6).

reduce costs by allowing members to choose the most cost-effective option.

Based on staff experience, FINRA estimates that on average the initial implementation costs for large members would be approximately \$2,400 per member, and for mid-size and small members<sup>9</sup> the costs are estimated to be approximately \$128 per member.

These estimates are based on FINRA's assumption that large members typically have full-featured Web sites that dynamically generate Web pages based on data and logic. The technology personnel at these members would be required to update the underlying information in order to automate the implementation of references and hyperlinks to BrokerCheck across all applicable Web pages. FINRA estimates that on average it would take large members approximately 60 hours of technology staffs' time to make the required updates, which at a \$40 hourly rate would cost approximately \$2,400 per firm.<sup>10</sup> FINRA assumes that mid-size and small members typically have less complex Web sites, which they manage and maintain with non-technical staff. These members would use personnel in non-technical roles to accomplish the required updates to their Web sites. FINRA estimates that on average it would take mid-size or small members approximately eight hours of non-technical staffs' time to make the required updates, which at a \$16 hourly rate would cost approximately \$128 per member.<sup>11</sup>

FINRA notes that costs associated with updating existing Web sites to include the required information will likely vary significantly across members depending on the scope and design of their Web sites, the extent to which the Web sites are automated (e.g., include content management systems that dynamically generate Web pages) and the number of Web pages that include professional profiles of the applicable

registered representatives. FINRA further estimates that there are approximately 175 large members and 3,625 mid-size and small members that provide products and services to retail investors and would be required to implement references and hyperlinks to BrokerCheck on their Web sites. Based on its average cost estimates for large, mid-size and small members, FINRA estimates that the total implementation costs associated with this rule proposal to the membership would be approximately \$884,000.<sup>12</sup>

In addition to the initial implementation costs, members would also incur ongoing costs associated with maintaining the links on their Web pages and creating and maintaining procedures and internal controls to ensure that they remain compliant with the proposed rule. However, FINRA believes that the ongoing compliance costs associated with this rule proposal would likely be minimal because, apart from standard Web site upkeep, "static" BrokerCheck hyperlinks and references would require minimal (if any) additional maintenance on an ongoing basis.<sup>13</sup> FINRA will read with interest comments from members on the anticipated costs of compliance with the proposal.

#### C. Alternatives

In considering how to best meet its regulatory objectives, FINRA considered several alternatives to particular features of this proposal. For example, some commenters suggested that the goals of the rule could be attained more cost effectively if FINRA were to advertise BrokerCheck and its benefits to investors more aggressively. FINRA agrees that better recognition of the benefits of BrokerCheck will serve the investing public well and is considering additional ways in which to enhance awareness. FINRA believes that the proposed rule change serves as a well-calibrated effort to reduce investor

search costs and to provide investors access to critical information as they make their decision regarding whether to engage in business with a particular firm or individual.

In developing this proposal, FINRA considered requiring members to include links to BrokerCheck on third-party Web sites, including social media sites. Several commenters expressed concerns about this requirement. As discussed in more detail below, commenters pointed out the limitations in their ability to control the content and features of third-party Web sites, and the significant costs associated with complying with such a requirement. FINRA recognizes the difficulties and costs associated with including links on third-party Web sites, and as a result FINRA has determined at this time to exclude the third-party Web site requirement and limit the application of the rule proposal to members' Web sites.

Finally, FINRA initially proposed that members would be required to include a deep link to BrokerCheck summary reports. These links would direct investors to the specific BrokerCheck page representing the collected information for an individual broker. Commenters noted the disadvantages of using a deep link that would bypass the BrokerCheck homepage, and speculated that there would be significant costs and operational challenges associated with including and tracking deep links. Based on these comments, FINRA has determined not to require the deep link in the proposed rule at this time.

#### C. Self-Regulatory Organization's Statement on Comments on the Proposed Rule Change Received from Members, Participants or Others

##### Background

In February 2012, FINRA published *Regulatory Notice* 12-10 seeking comment on a proposal regarding ways to facilitate and increase investor use of BrokerCheck information. A copy of the *Regulatory Notice* is attached as Exhibit 2a.<sup>14</sup> FINRA received 71 comment letters in response to *Regulatory Notice* 12-10. In January 2013, FINRA filed with the SEC SR-FINRA-2013-002, a proposed rule change to amend FINRA Rule 2267 to require that members include a prominent description of and link to BrokerCheck on their Web sites, social media pages and any comparable Internet presence and on Web sites, social media pages and any comparable Internet presence relating to a member's investment banking or securities

<sup>9</sup> Based on FINRA By-Laws, Article I (Definitions), members with 150 or fewer registered representatives are classified as small, members with 151 to 499 registered representatives are classified as mid-size, and members with 500 or more registered representatives are classified as large.

<sup>10</sup> The \$40 per hour estimate is based on the high end of the compensation range for web application developers, reported on publicly available sources. For example, the total compensation, including salary, bonus and other benefits, reported for web applications developer on [payscale.com](http://www.payscale.com/research/US/Job=Web_Developer/Salary) ranges from \$33,122 to \$84,271, which on an hourly basis is approximately \$16-\$41 per hour. See [http://www.payscale.com/research/US/Job=Web\\_Developer/Salary](http://www.payscale.com/research/US/Job=Web_Developer/Salary) (accessed May 20, 2015).

<sup>11</sup> For the purpose of estimating costs for mid-size or small members, FINRA uses a \$16 hourly rate, which corresponds to the low end of the compensation range for a web application developer, as discussed above.

<sup>12</sup> As discussed above, FINRA estimates that there are 175 large members that would be required to implement references and hyperlinks to BrokerCheck on their Web sites, and the implementation costs for these large firms would be approximately \$2,400 per firm. Thus, the total implementation costs for these large members would be approximately \$420,000 (\$2,400 × 175). Similarly, the total implementation cost for the 3,625 mid-size and small members, based on a \$128 per firm estimate, would be approximately \$464,000 (\$128 × 3,625). Hence, the total implementation cost across all members is anticipated to be about \$884,000.

<sup>13</sup> Ongoing costs associated with maintaining hyperlinks could be significant if the underlying hyperlinks change regularly over time. However, considering that FINRA does not anticipate changing the BrokerCheck hyperlink, costs associated with maintaining such a link are anticipated to be minimal.

<sup>14</sup> The Commission notes that the Exhibits referred to herein (Exhibits 2a-2e) are attached to the filing, not to this Notice.

business maintained by or on behalf of any person associated with a member. A copy of the 2013 Notice of Filing is attached as Exhibit 2b. On January 25, 2013, the 2013 filing was published for comment in the **Federal Register**, and the SEC received 24 comment letters in response to the proposal. FINRA withdrew the filing on April 18, 2013 to assess and respond to commenters' concerns.

In light of concerns raised on the earlier proposals, in April 2014, FINRA published *Regulatory Notice 14-19* ("Notice 14-19"), requesting comment on the rules as proposed therein (the "Notice 14-19 proposal"). A copy of Notice 14-19 is attached as Exhibit 2c. The comment period expired on June 16, 2014. FINRA received 22 comments in response to Notice 14-19. A list of the commenters in response to Notice 14-19 is attached as Exhibit 2d, and copies of the comment letters received in response to Notice 14-19 are attached as Exhibit 2e.<sup>15</sup> A summary of the comments and FINRA's response is provided below.

The Notice 14-19 proposal would have required a member to include a readily apparent reference and hyperlink to BrokerCheck on each firm Web site that is available to retail investors. It also would have required a member to include a readily apparent reference and hyperlink to BrokerCheck in online retail communications with the public that include a professional profile of, or contact information for, an associated person.

The requirement to include a link to BrokerCheck where there is contact information or a professional profile of an associated person would have been subject to the following conditions:

- If the retail communication appeared on the member's Web site or any site that it hosted, the link would have had to appear in close proximity to the profile or contact information.
- If the retail communication appeared on a third-party Web site (such as a social media page) that permitted a hyperlink to another Web site, the member would have been required to either:
  - Post a hyperlink to BrokerCheck in close proximity to the profile or contact information; or
  - Post a hyperlink to the member's Web site, which included a readily apparent reference and hyperlink to BrokerCheck, in close proximity to the profile or contact information. The third-party Web site would have had to

disclose that a hyperlink to BrokerCheck is available through the linked Web site.

- If the retail communication appeared on a third-party Web site that did not permit a hyperlink to another Web site, the member would have been required to provide the BrokerCheck web address (URL) in close proximity to the profile or contact information and, to the extent feasible, disclose that information concerning the associated person is available through BrokerCheck.

The proposal would have excepted from these requirements:

- Electronic mail and text messages;
- A retail communication that is posted on an online interactive forum (such as a message board, Twitter feed or chat room);
- A member that does not provide products or services to retail investors; and
- A directory or list of associated persons limited to names and contact information.

Seven commenters supported the proposal.<sup>16</sup> Six commenters opposed the proposal.<sup>17</sup> Eight commenters did not expressly support or oppose the proposal, but recommended changes to, or sought clarification of, the proposal.<sup>18</sup> One commenter expressed overall opposition to FINRA and to BrokerCheck in particular.<sup>19</sup>

#### Comments Supporting Proposal

Commenters supporting the proposal stated that the benefits of the proposal outweigh its potential costs, and that the proposal would increase investors' awareness of BrokerCheck. Four commenters<sup>20</sup> supported the proposal overall, but opposed the omission of the 2013 version's requirement to include a deep link to an associated person's BrokerCheck report. These commenters stated that investors would have difficulty searching for a particular broker's BrokerCheck report on the FINRA Web site without a deep link, particularly where a broker has a common name, such as John Smith. One commenter recognized the difficulty of including deep links on third-party sites, but suggested that FINRA at least require deep links from pages on a member's Web site that include a broker's contact or profile information.<sup>21</sup> One commenter

suggested that FINRA inquire of its examination staff or, alternatively, poll members firms to ascertain and compare utilization rates of the different types of online communications occurring between a financial advisor and their clients and gear the requirements toward embedding links to BrokerCheck and deep links to individual financial advisors in those communications.<sup>22</sup>

Two commenters<sup>23</sup> opposed the exception for electronic mail. PIABA noted that including a link to BrokerCheck in an associated person's email signature block would not be burdensome. PIABA also recommended that the proposal require a BrokerCheck description and hyperlink be placed in printed customer account statements. PIABA further recommended changes to BrokerCheck itself to increase the information available to investors.

#### Comments Opposing the Proposal

Six commenters opposed the proposal. All cited the potential compliance burdens associated with this proposed rule change as a principal reason not to adopt it, particularly the burdens it would impose on small members. Two commenters strongly opposed the proposal because they believe BrokerCheck presents a biased and unfavorable view of securities firms and their personnel.<sup>24</sup>

Many questioned the potential benefits the proposal would offer to investors, noting that investors may already search for information about members and their representatives, such as through Google or the FINRA Web site.<sup>25</sup> One commenter also noted that the proposal will require a small firm compliance officer to divert resources from servicing client accounts and instead use them to achieve compliance with a rule that offers little public benefits.<sup>26</sup>

#### Comments Recommending Changes to or Clarifications of the Proposal

A number of commenters expressed concerns with requirements to include links and disclosures on third-party Web sites not controlled by a member.<sup>27</sup> Commenters noted that members do not control the content, appearance, or features of third-party sites, and thus are dependent on these sites in terms of complying with the rule proposal.

<sup>16</sup> See GSU, NASAA, ICI, PIRC, PIABA, University of Miami School of Law Investor Rights Clinic, and Teresa Vollenweider.

<sup>17</sup> See Alpine, Buckman, Farmers, First Georgetown, MSTC, and Windham.

<sup>18</sup> See Schwab, CAI, Commonwealth, FSI, Lincoln, NFP, SIFMA, and Wells Fargo.

<sup>19</sup> See Carrie Devorah.

<sup>20</sup> See NASAA, GSU, PIRC and PIABA.

<sup>21</sup> See GSU.

<sup>22</sup> See NASAA.

<sup>23</sup> See NASAA and PIABA.

<sup>24</sup> See Alpine and Buckman.

<sup>25</sup> See Farmers, First Georgetown, MSTC, and Windham.

<sup>26</sup> See Windham.

<sup>27</sup> See Schwab, CAI, FSI, Lincoln, SIFMA and Wells Fargo.

<sup>15</sup> See Exhibit 2d for a list of abbreviations assigned to commenters.



Commenters pointed out that the proposal appears to be based on technology and social media site rules as they appear today, without taking into account future changes. For example, commenters stated the rules fail to explain a member's responsibilities if a third-party site revised its rules and no longer allowed links to other Web sites. These commenters also argued that the proposal inadequately addressed limits imposed by third-party sites. For example, although Twitter allows a single link to another site, its Profile section limits the user to 160 characters, hardly enough to include either a link to BrokerCheck, or a link to a member's Web site plus the additional disclosure required by the rule proposal. In addition, the requirement would preclude a member from including any other content in the Profile section.

SIFMA recommended that FINRA alter its proposal to make it more principles-based with respect to requirements applicable to third-party sites. SIFMA suggested that the rule be revised to use "should, to the extent reasonable" or similar language regarding third-party site linking and disclosure obligations instead of "must." Wells Fargo recommended that the proposal should relieve members of its requirements if a third-party site cannot accommodate a firm's request to include the required link or disclosures.

Commenters requested that FINRA clarify that the rule proposal does not apply to either: (i) Search-engine based, text-only advertising (such as advertisements generated by Google or Bing); or (ii) other "static" web-based advertising that contains general references to the services provided by an associated person and includes a link to the person's profile page.<sup>28</sup> One commenter also requested that the proposal expressly exclude certain types of online retail communications, such as interviews, articles, reprints, award listings, biographies, sponsorships, press releases, radio replays, and advertisements that include associated persons' profiles or contact information.<sup>29</sup>

Commenters also urged FINRA to clarify when a member would be deemed to have "adopted" or become "entangled" with a third-party Web site, thus making it responsible for including a link to BrokerCheck on the site.<sup>30</sup> One commenter recommended that FINRA make clear in the rule language that it does not apply to a third-party site that

a member has not adopted or become entangled with.<sup>31</sup>

Commenters requested that FINRA clarify the extent to which a member must include a BrokerCheck link on its own Web site.<sup>32</sup> For example, does a member have to include a link on each Web page of the firm's Web site, or only once on its homepage? Also, what if a member has contact information or profiles of multiple representatives on a single Web page? Does the member have to include multiple links to BrokerCheck, or may it only include one such link?

The ICI recommended that FINRA provide members with flexibility as to where on a firm's Web site a link to BrokerCheck must appear. For example, a member should be allowed to include the link on a Web page that the member reasonably determines will draw the attention of retail investors. SIFMA and the ICI also requested that FINRA clarify that members may use "buffer" screens that inform a user that they are leaving the firm's Web site before the user lands on the BrokerCheck Web site.

Given that FINRA includes a link to BrokerCheck on its own Web site, one member asked whether a link to the FINRA Web site would meet the rule's requirements.<sup>33</sup> This commenter noted that, if so, the rule proposal appears to be redundant, given that FINRA Rule 2210(e)(3) already requires members that indicate FINRA membership to include a link to FINRA's Web site.

Two commenters recommended that the proposal only apply to Web pages that provide contact or profile information for registered representatives, rather than all associated persons.<sup>34</sup>

SIFMA and Wells Fargo requested that the exception for directories be clarified. First, SIFMA sought clarification that including a link to an associated person's profile page in a directory would not trigger the requirements to include a link to and description of BrokerCheck. Second, they urged FINRA to allow more information in directories without requiring a BrokerCheck link, such as general biographical information and areas of expertise.

The ICI and SIFMA recommended that FINRA expand the exception for email and text messages to include other similar forms of messaging. This expansion would take into account future technological changes to electronic messaging.

SIFMA requested clarification that the rule proposal would not apply to mobile device "apps" or other web-based applications (such as trading platforms or OES) that provide customers with access to their accounts and other member-provided information and capabilities. SIFMA also requested that FINRA include a safe harbor for broken links that allow members time to correct any links that subsequently fail.

Commenters agreed with the revision to the prior proposal that eliminated the requirement to include a deep link to a member's or associated person's BrokerCheck report.<sup>35</sup> Commenters noted that the costs of including and tracking deep links in member and third-party Web sites would have been significant and operationally unfeasible.

Commenters reiterated opponents' views that the proposal would impose significant costs and burdens on members.<sup>36</sup> These costs include requiring members to create and implement new written policies and procedures, and performing ongoing surveillance of firm and associated persons' Web sites to ensure compliance with the rule proposal. One member noted that it has approved roughly 1,000 LinkedIn profiles, and that in order to achieve compliance with the rule, the firm would have to incur 700 employee hours (or nearly 17 weeks of a full-time employee's time).<sup>37</sup>

Commenters recommended that the Chief Economist's office perform a cost-benefit analysis of the rule proposal to ensure that its benefits will exceed its costs before FINRA proceeds with the proposal. Other commenters urged that, if FINRA adopts the rule proposal, members be given at least six months to implement any required changes.<sup>38</sup>

Commenters also recommended that FINRA explore alternatives to requiring links to BrokerCheck as a means to increase investor knowledge and usage of the site.<sup>39</sup> For example, FINRA could pursue its own investor outreach program, or encourage state securities regulators to include links to BrokerCheck on their Web sites. FINRA could make the references to BrokerCheck on its own Web site more prominent and user-friendly, and improve the visual quality and clarity of BrokerCheck summary reports. FINRA could also target focus groups in order to identify possible alternative means of

<sup>35</sup> See Schwab, CAI, Commonwealth, FSI, SIFMA and Wells Fargo.

<sup>36</sup> See CAI, FSI, Lincoln, SIFMA and Wells Fargo.

<sup>37</sup> See Lincoln.

<sup>38</sup> See ICI, SIFMA and Wells Fargo.

<sup>39</sup> See Schwab, CAI, and FSI.

<sup>28</sup> See SIFMA and Wells Fargo.

<sup>29</sup> See Wells Fargo.

<sup>30</sup> See CAI and Commonwealth.

<sup>31</sup> See Commonwealth.

<sup>32</sup> See CAI, Commonwealth, Lincoln and SIFMA.

<sup>33</sup> See NFP.

<sup>34</sup> See CAI and Lincoln.

facilitating and increasing investor use of BrokerCheck.

#### General Comments

One commenter strongly criticized FINRA's commitment to protect investors. The commenter noted that the proposal would do little good because, in this commenter's view, it would merely present "expunged backgrounds and brokercheck histories [sic] that are, too often, fairytales."<sup>40</sup>

#### Response to Comments

As discussed above, many of the comments either opposing the proposal in full, or recommending changes to the proposal, concerned requirements in the *Notice 14–19* proposal that would have required members to include links to BrokerCheck on third-party Web sites, such as social media sites. FINRA believes it has addressed these concerns by revising the current proposal to limit its applicability to a member's own Web site. FINRA however will further consider the commenters' concerns regarding links on third-party Web sites and determine whether to pursue separate rulemaking addressing such links.

Under the current version, each of a member's Web sites must include a readily apparent reference and link to BrokerCheck on: (i) The initial Web page that the member intends to be viewed by retail investors; and (ii) any other Web page that includes a professional profile of one or more registered persons who conduct [sic] business with retail investors. The current version provides exceptions from these requirements for: (i) A member that does not provide products or services to retail investors; and (ii) a directory or list of registered persons limited to names and contact information. The current version would not require a member to include a link to BrokerCheck from any third-party Web site, such as a social media site.

FINRA does not agree that it is necessary at this time to reinstate a requirement to include a deep link to a member's or a registered person's BrokerCheck report. A deep link requirement could potentially increase Web site maintenance costs, and FINRA is not proposing to require such links at this time. Most investors should be able to find information concerning particular members or registered representatives without difficulty given the ease of operation of the BrokerCheck search feature.

FINRA also does not believe it is necessary or appropriate to require links

to BrokerCheck on each email sent by a member or registered person. FINRA believes that such a requirement would be overly burdensome and require significant system changes, without commensurate benefit. However, FINRA has removed the express exception for emails and text messages as unnecessary, since the proposal by its terms only applies to a member's own Web site. For the same reason, FINRA has removed the prior exception for retail communications posted on online interactive forums.

FINRA does not agree with comments that BrokerCheck presents a biased and unfavorable view of securities firms and their personnel, or that it omits important information to which investors should have access. FINRA has carefully considered the need to provide investors with information necessary to make informed choices about the individuals and members with which they conduct business. Moreover, FINRA is required by statute to establish and maintain a system for collecting and retaining registration information, including disciplinary actions, regulatory, judicial and arbitration proceedings, and other information required by law, or exchange or association rule, and the source and status of such information.<sup>41</sup> FINRA believes that it is important that investors have access to this information to help them make informed decisions when selecting a broker-dealer or registered person with whom to do business. FINRA regularly assesses the BrokerCheck program and may consider the inclusion of additional information in BrokerCheck at a later time.

FINRA does not agree that the proposal should allow more information in directories of registered persons without requiring a BrokerCheck link, such as biographical information or areas of expertise. This kind of information is precisely the content that should trigger a link to BrokerCheck, since its intent is to generate investor interest in a particular registered representative.

FINRA believes it has answered commenters' questions concerning the scope of the proposed link requirements. In this regard, a member is required to include a link to BrokerCheck only on Web pages that are either the initial page that the member intends to be viewed by retail investors, or pages that include profile information about registered persons that conduct business with retail investors. Links are not required on every Web page of a member's Web site. If a Web page

includes profile information about multiple registered persons, only one link to BrokerCheck is required. In response to comments received to the *Notice 14–19* proposal, FINRA has revised the rule as proposed in *Notice 14–19* to require a link to BrokerCheck on Web pages that provide profile information about registered persons, rather than Web pages that provide profile information about any associated person. Members also may use "buffer" screens or interstitial exiting site pages to inform investors that they are leaving the member Web site prior to connecting to BrokerCheck, although there is no requirement to do so.

In addition, members have flexibility on how best to link to BrokerCheck, as long as the reference and link to BrokerCheck are readily apparent. For example, members have expressed interest in using "widgets" as a way to link to BrokerCheck. Use of widgets would meet to [sic] the proposal's requirements, as long as the link and reference to BrokerCheck are readily apparent.

FINRA does not agree that the proposal is redundant given that FINRA includes a link to BrokerCheck on the FINRA Web site. FINRA believes that the proposal will increase awareness of BrokerCheck and believes that more investors will use BrokerCheck after it is implemented.

FINRA also does not believe it is necessary or appropriate to create an exception from the proposal for mobile device applications. To the extent that a web-based application merely provides access to a customer's account information and does not contain profile information about a registered representative that conducts business with retail investors, the proposed requirements would not apply. However, if a customer uses his or her mobile device to access a Web page that contains profile information about a registered representative that conducts business with retail investors, FINRA believes it is important for the customer to be made aware of BrokerCheck, irrespective of whether the investor used a mobile device or a desktop or laptop computer to view such a Web page.

FINRA has considered the potential costs and benefits of the *Notice 14–19* proposal and, accordingly, revised the proposal to reduce its potential costs while maintaining the proposal's investor protection goals. FINRA also has proposed to allow members at least six months to comply with the proposed rule change. FINRA appreciates the suggestions to explore alternatives to increase investor knowledge and usage

<sup>40</sup> See Carrie Devorah.

<sup>41</sup> See 15 U.S.C. 78o–3(i).

of BrokerCheck. While such suggestions are beyond the scope of this proposal, FINRA intends to continue to consider ways to increase investor knowledge and usage of BrokerCheck.

### III. Date of Effectiveness of the Proposed Rule Change and Timing for Commission Action

Within 45 days of the date of publication of this notice in the **Federal Register** or within such longer period up to 90 days (i) as the Commission may designate if it finds such longer period to be appropriate and publishes its reasons for so finding or (ii) as to which the self-regulatory organization consents, the Commission will:

A. by order approve or disapprove such proposed rule change, or

B. institute proceedings to determine whether the proposed rule change should be disapproved.

### IV. Solicitation of Comments

Interested persons are invited to submit written data, views, and arguments concerning the foregoing, including whether the proposed rule change is consistent with the Act. Comments may be submitted by any of the following methods:

#### *Electronic Comments*

- Use the Commission's Internet comment form (<http://www.sec.gov/rules/sro.shtml>); or
- Send an email to [rule-comments@sec.gov](mailto:rule-comments@sec.gov). Please include File Number SR-FINRA-2015-022 on the subject line.

#### *Paper Comments*

- Send paper comments in triplicate to Secretary, Securities and Exchange Commission, 100 F Street, NE., Washington, DC 20549-1090.

All submissions should refer to File Number SR-FINRA-2015-022. This file number should be included on the subject line if email is used. To help the Commission process and review your comments more efficiently, please use only one method. The Commission will post all comments on the Commission's Internet Web site (<http://www.sec.gov/rules/sro.shtml>). Copies of the submission, all subsequent amendments, all written statements with respect to the proposed rule change that are filed with the Commission, and all written communications relating to the proposed rule change between the Commission and any person, other than those that may be withheld from the public in accordance with the provisions of 5 U.S.C. 552, will be available for Web site viewing and printing in the Commission's Public

Reference Room, 100 F Street, NE., Washington, DC 20549, on official business days between the hours of 10:00 a.m. and 3:00 p.m. Copies of the filing also will be available for inspection and copying at the principal office of FINRA. All comments received will be posted without change; the Commission does not edit personal identifying information from submissions. You should submit only information that you wish to make available publicly. All submissions should refer to File Number SR-FINRA-2015-022 and should be submitted on or before August 3, 2015.

For the Commission, by the Division of Trading and Markets, pursuant to delegated authority.<sup>42</sup>

**Brent J. Fields,**  
*Secretary.*

[FR Doc. 2015-16978 Filed 7-10-15; 8:45 am]

BILLING CODE 8011-01-P

## SECURITIES AND EXCHANGE COMMISSION

[Release No. 34-75375; File No. SR-NASDAQ-2015-066]

### Self-Regulatory Organizations; The NASDAQ Stock Market LLC; Notice of Filing and Immediate Effectiveness of Proposed Rule Change to Amend the Definition of Designated Retail Order in Nasdaq Rule 7018

July 7, 2015.

Pursuant to Section 19(b)(1) of the Securities Exchange Act of 1934 ("Act"),<sup>1</sup> and Rule 19b-4 thereunder,<sup>2</sup> notice is hereby given that on June 24, 2015, The NASDAQ Stock Market LLC ("Nasdaq" or the "Exchange") filed with the Securities and Exchange Commission ("Commission") the proposed rule change as described in Items I and II below, which Items have been prepared by Nasdaq. The Commission is publishing this notice to solicit comments on the proposed rule change from interested persons.

#### I. Self-Regulatory Organization's Statement of the Terms of Substance of the Proposed Rule Change

Nasdaq proposes to amend the definition of "Designated Retail Order" in Nasdaq Rule 7018.

The text of the proposed rule change is available at <http://nasdaq.cchwallstreet.com/>, at Nasdaq's principal office, and at the Commission's Public Reference Room.

<sup>42</sup> 17 CFR 200.30-3(a)(12).

<sup>1</sup> 15 U.S.C. 78s(b)(1).

<sup>2</sup> 17 CFR 240.19b-4.

#### II. Self-Regulatory Organization's Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change

In its filing with the Commission, Nasdaq included statements concerning the purpose of, and basis for, the proposed rule change. The text of these statements may be examined at the places specified in Item IV below, and is set forth in Sections A, B, and C below.

##### A. Self-Regulatory Organization's Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change

###### 1. Purpose

The Exchange proposes to amend the definition of "Designated Retail Order" ("DRO") in Nasdaq Rule 7018 in order to clarify it and make it more consistent with the definition of "Retail Order" as previously set forth in Nasdaq Rule 4780(a)(2) (eliminated by the recently approved SR-NASDAQ-2015-024), BATS Y-Exchange, Inc. ("BATS") Rule 11.24(a)(2)<sup>3</sup> and NYSE Arca, Inc. ("NYSE Arca") Rule 7.44(a)(3)<sup>4</sup>, as well as how it is defined in within the BATS Retail Member Organization Application Form ("BATS Form").<sup>5</sup> The Exchange will also update its Designated Retail Order Attestation form<sup>6</sup> ("Attestation Form") to be consistent with the proposed rule change. Pursuant to previous approvals, any and all members are required to submit a retail order attestation form to the specific exchange before submitting a retail order to that exchange.<sup>7</sup>

As mentioned above, the proposed changes to the DRO definition in Nasdaq Rule 7018, as well as the corresponding changes to Nasdaq's Attestation Form, will be consistent with the recently eliminated Nasdaq Rule 4780 and in line with the revisions made by BATS to the BATS Form. Specifically, BATS updated its BATS Form to include three key elements:<sup>8</sup> (1) To ensure that the order is a riskless principal order that meets the criteria of

<sup>3</sup> See BATS Rule 11.24(a)(2).

<sup>4</sup> See NYSE Arca Rule 7.44(a)(3).

<sup>5</sup> See [http://cdn.batstrading.com/resources/membership/BYX\\_Retail\\_Member\\_Organization\\_Application.pdf](http://cdn.batstrading.com/resources/membership/BYX_Retail_Member_Organization_Application.pdf).

<sup>6</sup> See [http://www.nasdaqtrader.com/content/Administration/Support/AgreementsTrading/dro\\_eligibility\\_form.pdf](http://www.nasdaqtrader.com/content/Administration/Support/AgreementsTrading/dro_eligibility_form.pdf).

<sup>7</sup> See e.g., Securities Exchange Act Release No. 69719 (June 7, 2013), 78 FR 35656 (June 13, 2014) (SR-NASDAQ-2013-031); Securities Exchange Act Release No. 69643 (May 28, 2013), 78 FR 33136 (June 3, 2014) (SR-BYX-2013-008); and Securities Exchange Act Release No. 69513 (May 3, 2013), 78 FR 27261 (May 9, 2014) (SR-NYSE-2013-08).

<sup>8</sup> *Supra* note 5.

FINRA Rule 5320.03;<sup>9</sup> (2) to state that an order from a “natural person” can include orders on behalf of accounts that are held in a corporate legal form, such as an Individual Retirement Account (“IRA”), Corporation, or a Limited Liability Company (“LLC”) that has been established for the benefit of an individual or group of related family members, provided that the order is submitted by an individual; and (3) to include the standard that members have implemented policies and procedures that are reasonably designed to ensure that “substantially all” orders (rather than the previous standard that “every order”) that are designated by the member as retail orders comply with these requirements. Nasdaq believes that inclusion in the DRO definition of an individual making the decision even if the account is held in corporate legal form qualifies as a “non-controversial” rule change under Rule 19b–4(f)(6) and is not a significant change from existing rules on other exchanges.

Consequently, Nasdaq will amend Nasdaq Rule 7018 to reflect the changes to the definition of DRO discussed above and amend its Attestation Form accordingly.

## 2. Statutory Basis

Nasdaq believes that its proposal is consistent with the requirements of the Act and the rules and regulations thereunder that are applicable to a national securities exchange, and, in particular, with the requirements of Section 6(b) of the Act.<sup>10</sup> In particular, the Exchange believes the proposed change furthers the objectives of Section 6(b)(5) of the Act,<sup>11</sup> in that it is designed to prevent fraudulent and manipulative acts and practices, to promote just and equitable principles of trade, to foster cooperation and coordination with persons engaged in facilitating transactions in securities, and to remove impediments to and perfect the mechanism of a free and open market and a national market system.

The Exchange also believes that the proposed rule change to amend and clarify the definition of DRO in Nasdaq Rule 7018 is consistent with these principles because it would remove impediments to and perfects the mechanism of a free and open market and a national market system, as well as increases competition among execution venues and encourages additional liquidity. Specifically, the amended

DRO definition is consistent with Nasdaq Rule 4780(a)(2) (eliminated by the recently approved SR–NASDAQ–2015–024), NYSE Arca Rule 7.44(a)(3) and BATS Rule 11.24(a)(2), and as defined in the BATS Form.<sup>12</sup> As BATS has done with its BATS Form, the Exchange’s proposed rule change amending the DRO definition will be more inclusive and benefits the individual investor who places his or her money into accounts that are held in a corporate legal form (e.g., an IRA, Corporation, or an LLC that has been established for the benefit of an individual or group of related family members), provided that the order has been submitted by an individual. As a result, the price discovery is enhanced as more retail investors will have the opportunity to avail themselves of DROs. Under the current rule and attestation, only a small segment of the retail market is included. The proposed rule change widens the net and affords more retail investors and their broker-dealers that route these orders greater opportunities.

Further, although the change from “every order” to “substantially all orders” slightly reduces the monitoring risk placed on broker-dealers, the Exchange believes that this slightly lower burden will encourage and provide reasonable incentives for retail-focused broker-dealers to route retail orders to the Exchange for the benefit of the price discovery process and for all market participants with enhanced retail liquidity and trading opportunities.

The Exchange believes that the amended DRO definition increases competition among execution venues and encourages additional liquidity by incentivizing more DROs to be routed to the Exchange, which will bring additional liquidity onto the Exchange. Additionally, the proposed rule change will improve the markets and create a more competitive environment, as well as bring more order flow, which, in turn, enhances the price discovery process on the Exchange. The Exchange believes that the transparency and competitiveness of the proposed rule change will result in better prices for retail investors.

The Exchange also believes that the proposed rule change is consistent with these principles in that it creates a financial incentive to bring more than just retail order flow from individual or joint ownership accounts to the public market. The proposed rule change also encourages retail order flow that is in other forms of account registration

employed by retail investors (as is the case with an IRA), which broadens it beyond just basic retail order flow. It also includes order flow from members that use other forms of account registration for tax reasons, retirement or pension savings, for families and other related retail investors.

Nasdaq also believes that the proposed rule change to the definition of DRO in Nasdaq Rule 7018 qualifies as a “non-controversial” rule change under Rule 19b–4(f)(6) because it is not novel and serves to put the Exchange on equal footing with BATS. It simply recognizes that an order from a “natural person” may include orders based on an individual making the decision (rather than an algorithm), even if the account is held in an IRA, Corporation, or an LLC that has been established for the benefit of an individual or group of related family members. Nasdaq further believes that inclusion in the DRO definition of an individual making the decision even if the account is held in corporate legal form qualifies as a “non-controversial” rule change under Rule 19b–4(f)(6) and is not a significant change from existing rules on other exchanges. The Exchange believes that this proposed rule change and the proposed rule change to modify the standard that members have implemented policies and procedures that are reasonably designed to ensure that “substantially all” rather than “every” order are minor enough changes to qualify the filing as non-controversial, which is consistent with previous approvals.

For the above reasons, Nasdaq believes the proposed rule change is consistent with the requirements of Section 6(b)(5) of the Act.<sup>13</sup>

## B. Self-Regulatory Organization’s Statement on Burden on Competition

The Exchange does not believe that the proposed rule change will result in any burden on competition that is not necessary or appropriate in furtherance of the purposes of the Act. The Exchange believes that competition improves by incentivizing more DROs to be routed to the Exchange, which will bring additional liquidity onto the Exchange as well. The definition of DRO, as amended, will improve the markets and create a more competitive environment, as well as bring more order flow and, therefore, more market makers onto the Exchange to provide liquidity and compete with robust competitive markets.

<sup>9</sup> See FINRA Rule 5320.03 (the riskless principal exception to the “Prohibition Against Trading Ahead of Customer Orders” FINRA rule).

<sup>10</sup> 15 U.S.C. 78f(b).

<sup>11</sup> 15 U.S.C. 78f(b)(5).

<sup>12</sup> *Supra* note 5.

<sup>13</sup> 15 U.S.C. 78f(b)(5).

*C. Self-Regulatory Organization's Statement on Comments on the Proposed Rule Change Received from Members, Participants, or Others*

Written comments were neither solicited nor received.

**III. Date of Effectiveness of the Proposed Rule Change and Timing for Commission Action**

Because the foregoing proposed rule change does not: (i) significantly affect the protection of investors or the public interest; (ii) impose any significant burden on competition; and (iii) become operative for 30 days from the date on which it was filed, or such shorter time as the Commission may designate, it has become effective pursuant to Section 19(b)(3)(A)(ii) of the Act<sup>14</sup> and subparagraph (f)(6) of Rule 19b-4 thereunder.<sup>15</sup>

At any time within 60 days of the filing of the proposed rule change, the Commission summarily may temporarily suspend such rule change if it appears to the Commission that such action is: (i) necessary or appropriate in the public interest; (ii) for the protection of investors; or (iii) otherwise in furtherance of the purposes of the Act. If the Commission takes such action, the Commission shall institute proceedings to determine whether the proposed rule should be approved or disapproved. The Exchange has provided the Commission written notice of its intent to file the proposed rule change, along with a brief description and text of the proposed rule change, at least five business days prior to the date of filing of the proposed rule change.

**IV. Solicitation of Comments**

Interested persons are invited to submit written data, views, and arguments concerning the foregoing, including whether the proposed rule change is consistent with the Act.

Comments may be submitted by any of the following methods:

*Electronic Comments*

- Use the Commission's Internet comment form (<http://www.sec.gov/rules/sro.shtml>); or
- Send an email to [rule-comments@sec.gov](mailto:rule-comments@sec.gov). Please include File Number SR-NASDAQ-2015-066 on the subject line.

*Paper Comments*

- Send paper comments in triplicate to Secretary, Securities and Exchange Commission, Station Place, 100 F Street NE., Washington, DC 20549-1090.

All submissions should refer to File Number SR-NASDAQ-2015-066. This file number should be included on the subject line if email is used. To help the Commission process and review your comments more efficiently, please use only one method. The Commission will post all comments on the Commission's Internet Web site <http://www.sec.gov/rules/sro.shtml>.

Copies of the submission, all subsequent amendments, all written statements with respect to the proposed rule change that are filed with the Commission, and all written communications relating to the proposed rule change between the Commission and any person, other than those that may be withheld from the public in accordance with the provisions of 5 U.S.C. 552, will be available for Web site viewing and printing in the Commission's Public Reference Room, 100 F Street, NE., Washington, DC 20549, on official business days between the hours of 10:00 a.m. and 3:00 p.m. Copies of the filing also will be available for inspection and copying at the principal office of Nasdaq. All comments received will be posted without change; the Commission does not edit personal identifying information from submissions. You should submit only information that you wish to make available publicly.

All submissions should refer to File Number SR-NASDAQ-2015-066 and should be submitted on or before August 3, 2015.

For the Commission, by the Division of Trading and Markets, pursuant to delegated authority.<sup>16</sup>

**Brent J. Fields,**  
Secretary.

[FR Doc. 2015-16976 Filed 7-10-15; 8:45 am]

**BILLING CODE 8011-01-P**

**SECURITIES AND EXCHANGE COMMISSION**

[Release No. 34-75374; File No. SR-BOX-2015-22]

**Self-Regulatory Organizations; BOX Options Exchange LLC; Notice of Filing of Proposed Rule Change to Implement the Governance Provisions of an Equity Rights Program**

July 7, 2015.

Pursuant to Section 19(b)(1) of the Securities Exchange Act of 1934 (the "Act")<sup>1</sup> and Rule 19b-4 thereunder,<sup>2</sup> notice is hereby given that, on June 25, 2015, BOX Options Exchange LLC (the "Exchange") filed with the Securities and Exchange Commission (the "Commission") the proposed rule change as described in Items I, II, and III below, which Items have been prepared by the self-regulatory organization. The Commission is publishing this notice to solicit comments on the proposed rule change from interested persons.

**I. Self-Regulatory Organization's Statement of the Terms of the Substance of the Proposed Rule Change**

The Exchange proposes to implement the governance provisions of an equity rights program (the "VPR Program"). Upon Commission approval of the proposed rule change, BOX Holdings Group LLC ("Holdings"), an affiliate of the Exchange and direct parent entity of BOX Market LLC, a facility of the Exchange ("BOX"), proposes to amend the existing Limited Liability Company Agreement of Holdings (the "Holdings LLC Agreement") by adopting an Amended and Restated Limited Liability Company Agreement of Holdings (the "Restated Holdings LLC Agreement"). There are no other proposed changes to any rule text. The text of the proposed rule change is available from the principal office of the Exchange, at the Commission's Public Reference Room and also on the Exchange's Internet Web site at <http://boxexchange.com>.

**II. Self-Regulatory Organization's Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change**

In its filing with the Commission, the self-regulatory organization included statements concerning the purpose of, and basis for, the proposed rule change and discussed any comments it received on the proposed rule change. The text of these statements may be examined at

<sup>14</sup> 15 U.S.C. 78s(b)(3)(a)(ii).

<sup>15</sup> 17 CFR 240.19b-4(f)(6). In addition, Rule 19b-4(f)(6) requires a self-regulatory organization to give the Commission written notice of its intent to file the proposed rule change, along with a brief description and text of the proposed rule change, at least five business days prior to the date of filing of the proposed rule change, or such shorter time as designated by the Commission. The Exchange has satisfied this requirement.

<sup>16</sup> 17 CFR 200.30-3(a)(12).

<sup>1</sup> 15 U.S.C. 78s(b)(1).

<sup>2</sup> 17 CFR 240.19b-4.

the places specified in Item IV below. The self-regulatory organization has prepared summaries, set forth in Sections A, B, and C below, of the most significant aspects of such statements.

*A. Self-Regulatory Organization's Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change*

1. Purpose

The Exchange proposes to implement the governance provisions of the VPR Program, in which certain BOX Options Participants (each, a "Participant") elected to participate. The Exchange notified all of its Participants of the opportunity to participate in the VPR Program by Regulatory Circular published on October 1, 2014. All Participants that indicated interest in participating in the VPR Program by October 31, 2014 and that subscribed to the VPR Program by January 14, 2015 were permitted to participate in the VPR Program.

The purpose of this rule filing is, subject to Commission approval, to fulfill a condition to providing Subscribers the full benefits intended through the VPR Program by permitting Holdings to amend the Holdings LLC Agreement by adopting the Restated Holdings LLC Agreement.

Background

In order to implement the VPR Program, the Exchange has already submitted a proposed rule change under Section 19(b)(3)(A)(ii) of the Securities Exchange Act of 1934 (the "Act")<sup>3</sup> and Rule 19b-4(f)(2) thereunder,<sup>4</sup> for immediate effectiveness, inasmuch as it establishes or changes a due, fee, or other charge imposed by the Exchange.<sup>5</sup> In addition, the Exchange is submitting this proposed rule change under Section 19(b)(1) of the Act<sup>6</sup> and Rule 19b-4 thereunder,<sup>7</sup> subject to Commission approval, to make changes to its company governance documents to accommodate aspects of the VPR Program that involve or affect the Restated Holdings LLC Agreement of Holdings.

Participants that elected to participate in the VPR Program have the right to

acquire equity in and receive distributions from Holdings, in exchange for the achievement of certain order flow volume commitment thresholds on the Exchange over a period of five (5) years and a nominal initial cash payment. The purpose of the VPR Program is to promote the long-term interests of the Exchange by incentivizing Participants to contribute to the growth and success of BOX by providing enhanced levels of trading volume to BOX.

Upon initiation of the VPR Program by Holdings, Participants that elected to participate in the VPR Program, met the eligibility criteria and made the initial cash payment ("Subscribers"), were issued Volume Performance Rights ("VPRs") in tranches of twenty (20) VPRs (each, a "Tranche") with a minimum subscription of two (2) Tranches per Subscriber. Twenty-seven (27) Tranches have been issued in connection with the VPR Program.

Each VPR is comprised of the right to receive 8.5 unvested new Class C Membership Units of Holdings ("Class C Units"), upon effectiveness of this rule filing, and an average daily transaction volume commitment ("VPR Volume Commitment") equal to 0.0055% of Industry ADV, as measured in Qualifying Contract Equivalents, for a total of five (5) years (twenty (20) consecutive measurement quarters).<sup>8</sup> The VPR Volume Commitment, in terms of total contracts, will change based on the movement of the Industry ADV. One VPR per Tranche will be eligible to vest each quarter of the five (5) year Program period, subject to the Subscriber meeting its volume commitment for that quarter. In addition, VPRs may be reallocated among Subscribers based upon exceeding or failing to meet Subscribers' volume commitments during the VPR Program period.

Ownership Units

As discussed above, each VPR held by a Subscriber includes the right to receive 8.5 Class C Units of Holdings within ten (10) business days after effectiveness of this rule filing and the completion or waiver of the conditions to closing. Currently, Holdings has

issued and outstanding Class A and Class B membership units. Class C Units will be created by the adoption of the Restated Holdings LLC Agreement and, at such time, Holdings will admit the Subscribers as Class C Members. Class C Units may be held in fractional numbers equal to one half Unit. Units may, but need not be, represented by physical certificates. The Restated Holdings LLC Agreement provides for the maintenance of capital accounts and other accounting and tax provisions relating to the Class C Units.

The existing limitations on the percentage ownership of Holdings by Participants will continue to apply. In the event that a Member, or any Related Person<sup>9</sup> of a Member, is a Participant pursuant to the Exchange Rules, and the Member owns more than 20% of the Units, alone or together with any

<sup>9</sup> "Related Person" means with respect to any Person: (A) any Affiliate of the Person; (B) any other Person with which the first Person has any agreement, arrangement or understanding (whether or not in writing) to act together for the purpose of acquiring, voting, holding or disposing of Units; (C) in the case of a Person that is a company, corporation or similar entity, any executive officer (as defined under Rule 3b-7 under the Exchange Act) or director of the Person and, in the case of a Person that is a partnership or limited liability company, any general partner, managing member or manager of the Person, as applicable; (D) in the case of any BOX Options Participant who is at the same time a broker-dealer, any Person that is associated with the BOX Options Participant (as determined using the definition of "person associated with a member" as defined under Section 3(a)(21) of the Exchange Act); (E) in the case of a Person that is a natural person and a BOX Options Participant, any broker or dealer that is also a BOX Options Participant with which the Person is associated; (F) in the case of a Person that is a natural person, any relative or spouse of the Person, or any relative of the spouse who has the same home as the Person or who is a director or officer of the Exchange or any of its parents or subsidiaries; (G) in the case of a Person that is an executive officer (as defined under Rule 3b-7 under the Exchange Act) or a director of a company, corporation or similar entity, the company, corporation or entity, as applicable; and (H) in the case of a Person that is a general partner, managing member or manager of a partnership or limited liability company, the partnership or limited liability company, as applicable. "Affiliate" means, with respect to any Person, any other Person controlling, controlled by or under common control with, the Person. As used in this definition, the term "control" means the possession, directly or indirectly, of the power to direct or cause the direction of the management and policies of a Person, whether through the ownership of voting securities, by contract or otherwise with respect to the Person. A Person is presumed to control any other Person, if that Person: (i) is a director, general partner, or officer exercising executive responsibility (or having similar status or performing similar functions); (ii) directly or indirectly has the right to vote 25 percent or more of a class of voting security or has the power to sell or direct the sale of 25 percent or more of a class of voting securities of the Person; or (iii) in the case of a partnership, has contributed, or has the right to receive upon dissolution, 25 percent or more of the capital of the partnership. See proposed Restated Holdings LLC Agreement Section 1.1.

<sup>3</sup> 15 U.S.C. 78s(b)(3)(A)(ii).

<sup>4</sup> 17 CFR 240.19b-4(f)(2).

<sup>5</sup> See Securities Exchange Act Release No. 74114 (January 22, 2015), 80 FR 4611 (January 28, 2015) (Notice of Filing and Immediate Effectiveness of a Proposed Rule Change to Implement an Equity Rights Program). See also Securities Exchange Act Release No. 74576 (March 25, 2015), 80 FR 17122 (March 31, 2015) (Notice of Filing and Immediate Effectiveness of a Proposed Rule Change to Clarify Certain Statements Made in SR-BOX-2015-03).

<sup>6</sup> 15 U.S.C. 78s(b)(1).

<sup>7</sup> 17 CFR 240.19b-4.

<sup>8</sup> The measurement of order flow for purposes of the VPR Program first began on January 12, 2015, the first trading day after the first Subscribers subscribed to the VPR Program. However, BOX extended the deadline to accommodate Subscribers; therefore, the first measurement date began later for a Subscriber that submitted the required documents and payment during the extension period. See Securities Exchange Act Release No. 74171 (January 29, 2015), 80 FR 6153 (February 4, 2015) (Notice of Filing and Immediate Effectiveness of a Proposed Rule Change To Extend the Deadline for the VPR Program to January 14, 2015).

Related Person of the Member (Units owned in excess of 20% being referred to as “Excess Units”), the Member and its designated Directors will have no voting rights with respect to the Excess Units on any action relating to BOX Holdings nor will the Member or its designated Directors, if any, be entitled to give any proxy with respect to the Excess Units in relation to a vote of the Members; provided, however, that whether or not the Member or its designated Directors, if any, otherwise participates in a meeting in person or by proxy, the Member’s Excess Units will be counted for quorum purposes and will be voted by the person presiding over quorum and vote matters in the same proportion as the Units held by the other Members are voted (including any abstentions from voting).<sup>10</sup>

Upon completion of the VPR Program, all outstanding Class C Units associated with vested VPRs will be automatically converted into an equal number of Class A Units and all outstanding Class C Units associated with unvested VPRs will be automatically cancelled and be of no further effect. All rights related to Class C Units will terminate automatically upon cancellation or conversion and rights related to the converted Class A Units will remain, subject to the terms of the Restated Holdings LLC Agreement.<sup>11</sup>

#### Voting

Each Class C Member will have the right to vote its Class C Units that are associated with vested VPRs (“Voting Class C Units”) on matters submitted to a vote of all holders of Units. VPRs will vest in accordance with the vesting provisions of the VPR Program.<sup>12</sup> Members holding Voting Class C Units will vote with Members holding all other classes of Units. Members holding Voting Units<sup>13</sup> will be entitled to vote together, as a single class, each with one vote per Voting Unit so held.<sup>14</sup> Issued and outstanding Class C Units that are not Voting Class C Units will not have voting rights. Accordingly, as a Subscriber meets or exceeds volume commitments, voting powers as Class C Member of Holdings will increase. Similarly, if Subscribers do not meet volume commitments, voting powers will decrease.

The Holdings LLC Agreement currently provides, and the Restated Holdings LLC Agreement will continue to provide, that any Director designated by either MX US 2, Inc. or IB Exchange Corp may effectively block certain actions of Holdings (the “Major Action Veto”). The Restated Holdings LLC Agreement provides that, upon vesting of VPRs associated with Class C Units equal to at least 25% of the total outstanding Units, the Major Action Veto will automatically expire and be of no further effect. Also, when the 25% threshold is met, the Restated Holdings LLC Agreement also provides that Holdings and its Members will take all necessary action to amend the Limited Liability Company Agreement of BOX to eliminate the major action veto provisions therein that are applicable to BOX and inure to the benefit of MX US 2, Inc. and IB Exchange Corp and to provide that the executive committee of BOX will be constituted in the same manner as the Executive Committee of Holdings.<sup>15</sup>

The Restated Holdings LLC Agreement includes a new supermajority voting requirement that Members holding at least 67% of all outstanding Voting Units must vote to approve certain actions (the “Supermajority Actions”) by Holdings.<sup>16</sup> The new supermajority voting requirement will be in addition to all other existing voting requirements applicable to Holdings and any actions Holdings may take, including the Major Action Veto. This new requirement provides additional protections to Subscribers and Members that Supermajority Actions will not be undertaken without broad support among holders of Voting Units.

Supermajority Actions include the following: (i) Merger or consolidation of Holdings or BOX with any other entity, a sale of Holdings or BOX, or the sale, lease or transfer, by Holdings or BOX, of any material portion of its assets; (ii) entry by Holdings or BOX into any line of business other than the business described in Article 3 of the Restated Holdings LLC Agreement or in Article 3 of the Limited Liability Company Agreement of BOX; (iii) conversion of Holdings or BOX from a Delaware limited liability company into any other type of entity; (iv) except as expressly contemplated by a members agreement among the Members (the “Members Agreement”), Holdings or BOX entering into any agreement, commitment, or

transaction with any Member or any of its Affiliates other than transactions or agreements upon commercially reasonable terms that are no less favorable to Holdings or BOX, respectively, than Holdings or BOX would obtain in a comparable arms-length transaction or agreement with a third party; (v) to the fullest extent permitted by law, taking any action to effect the voluntary, or which would precipitate an involuntary, dissolution or winding-up of Holdings or BOX; (vi) except as otherwise provided in the facility agreement between the Exchange and BOX (the “Facility Agreement”) or to the extent otherwise required by the Exchange to fulfill its regulatory functions or responsibilities or to oversee the BOX Market as determined by the board of the Exchange, the issuance, by Holdings, of any additional equity interests in, or any securities exchangeable for or convertible into equity securities of, Holdings other than the following, as approved by the Holdings Board and in the aggregate not to exceed ten percent (10%) of the outstanding equity interests of Holdings: (A) Equity interests, options or convertible securities issued as a dividend, Unit split or distribution on existing Units, (B) equity interests issued to employees or Directors of, or consultants or advisors to, Holdings or one or more subsidiaries thereof pursuant to a plan, agreement or arrangement, (C) equity interests issued upon the exercise of options or convertible securities issued by Holdings, provided each such exercise or conversion is in accordance with the terms of each such option or security, and (D) equity interests issued by Holdings in the acquisition of any business; (vii) the issuance, by BOX, of any additional equity interests in, or any securities exchangeable for or convertible into equity securities of, BOX, except as otherwise provided in the Facility Agreement or to the extent otherwise required by the Exchange to fulfill its regulatory functions or responsibilities or to oversee the BOX Market as determined by the board of the Exchange; (viii) permitting BOX to operate the BOX Market utilizing any other regulatory services provider other than the Exchange, except as otherwise provided in the Facility Agreement or to the extent otherwise required by the Exchange to fulfill its regulatory functions or responsibilities or to oversee the BOX Market as determined by the Exchange Board; (ix) except as otherwise provided in the Facility Agreement, entering into, or permitting any subsidiary of Holdings to enter into,

<sup>10</sup> See proposed Restated Holdings LLC Agreement Section 7.4(h).

<sup>11</sup> See proposed Restated Holdings LLC Agreement Section 2.5(e).

<sup>12</sup> See *supra*, note 5.

<sup>13</sup> “Voting Unit” means any Class A Unit, Class B Unit, or Voting Class C Unit.

<sup>14</sup> See proposed Restated Holdings LLC Agreement Section 4.13(a).

<sup>15</sup> See proposed Restated Holdings LLC Agreement Section 16.4.

<sup>16</sup> See proposed Restated Holdings LLC Agreement Section 4.13(b).



any partnership, joint venture or other similar joint business undertaking; (x) making a fundamental change to the business model of BOX to be other than a for-profit business, except to the extent otherwise required by the Exchange to fulfill its regulatory functions or responsibilities or to oversee the BOX Market as determined by the Exchange Board; (xi) subject to the transfer provisions of the Restated Holdings LLC Agreement, the acquisition of any Units by any person that results in the person, alone or together with any Affiliate of the person, newly holding an aggregate percentage interest equal to or greater than twenty percent (20%); (xii) altering the provisions relating to the designation of Directors set forth in Section 4.1(a), except to the extent otherwise required by the Exchange to fulfill its regulatory functions or responsibilities or to oversee the BOX Market as determined by the Exchange Board; and (xiii) altering or amending any of the Supermajority Actions provisions, except to the extent otherwise required by the Exchange to fulfill its regulatory functions or responsibilities or to oversee the BOX Market as determined by the Exchange Board.

Amendments to the Restated Holdings LLC Agreement that alter the terms of one or more classes of Units in a manner that would materially, adversely and disproportionately (as compared with other classes of Units) affect the rights associated with the Class C Units as a class will require the written consent of holders of Class C Units ("Class C Members") holding at least seventy-five percent (75%) of the then outstanding Class C Units and any amendment to the Restated Holdings LLC Agreement that would have a disproportionate (with respect to the same class), material and adverse effect on the rights associated with any Units, or impose any additional, disproportionate (with respect to the same Class) and material liability or obligation upon the holder of any Units, will not be effective without the consent of the holders of those Units.<sup>17</sup>

#### Directors

The Restated Holdings LLC Agreement will amend the provisions governing composition of the Holdings Board. Currently, MX US 2, Inc. has the right to designate up to five (5) Directors, IB Exchange Corp has the right to designate up to two (2) Directors and each other Member has the right to designate one (1) Director to the

Holdings Board and the Holdings Board has the power to increase the size of the Holdings Board and to authorize new Members to designate Directors.

Under the Restated Holdings LLC Agreement, no Member may designate more than three (3) Directors and each Member may designate the maximum number of Directors permitted under any one (1) (but not more than one) of the following criteria: (i) Each Member, so long as it (together with its respective Affiliates) holds a combined total of Class A Units and Class B Units greater than two and one-half percent (2.5%) of all outstanding Voting Units, will be entitled to designate one (1) Director, (ii) each Member, so long as it (together with its respective Affiliates) holds a combined total of Voting Class C Units greater than four percent (4%) of all outstanding Voting Units, will be entitled to designate one (1) Director, (iii) each Member, so long as it (together with its respective Affiliates) holds a combined total of Voting Units greater than fourteen percent (14%) of all outstanding Voting Units, will be entitled to designate two (2) Directors, (iv) each Member, so long as it (together with its respective Affiliates) holds a combined total of Voting Units greater than twenty-eight percent (28%) of all outstanding Voting Units, will be entitled to designate three (3) Directors, and (v) each other existing Member may designate one (1) Director.<sup>18</sup> Directors serving on the Holdings Board may also serve on the board of directors of any subsidiary of Holdings. If a Member ceases to qualify for the right to designate a Director then serving, that Director will then automatically be removed from the Holdings Board.

The Restated Holdings LLC Agreement will also amend the provisions governing the right of Members to designate members of the Executive Committee of Holdings (the "Executive Committee"), if any. Currently, MX US 2, Inc. has the right to designate up to two (2) members of the Executive Committee ("EC Members") and IB Exchange Corp has the right to designate one (1) EC Member. Under the Restated Holdings LLC Agreement, any Member with the right to designate three (3) Directors to the Holdings Board will have the right to designate up to two (2) EC Members and any Member with the right to designate two (2) Directors to the Holdings Board will have the right to designate one (1) EC Member. Other provisions relating to the composition of

the Executive Committee will be unchanged.<sup>19</sup>

Subscribers will also have the right to designate one individual to a new Advisory Committee organized by Holdings, the purpose of which will be to advise and make recommendations to Holdings with respect to the Exchange's competitiveness in the marketplace. Only Subscribers will have the right to designate individuals to serve on the Advisory Committee.<sup>20</sup> The Advisory Committee will be advisory only and will not have any powers, votes or fiduciary duties to Holdings.

#### Distributions

Once per year, Holdings will make a distribution (an "Annual Distribution") to its Members to the extent funds are available for distribution.<sup>21</sup> In determining the amount of each Annual Distribution, the Holdings Board will first provide for any regulatory needs of BOX and the Exchange, as determined by the Exchange Board, and any Annual Distribution amounts will be calculated after taking into account all financial and regulatory needs of the Exchange, as determined by the Exchange.<sup>22</sup> The Annual Distribution will be equal to 80% of Free Cash Flow,<sup>23</sup> except as limited by applicable law, including for regulatory and compliance purposes. In addition, another 15% of Free Cash Flow will be included in the distribution, except to the extent the Holdings Board determines that any portion thereof is (i) required for the operations of Holdings and its subsidiaries, which will be reflected on the annual budget for the next year, (ii) required for payment of liabilities or

<sup>19</sup> See proposed Restated Holdings LLC Agreement Section 4.2(c).

<sup>20</sup> See Securities Exchange Act Release No. 74114 (January 22, 2015), 80 FR 4611 at 4613 (January 28, 2015) (Notice of Filing and Immediate Effectiveness of a Proposed Rule Change to Implement an Equity Rights Program).

<sup>21</sup> Distributions on Class C Units will not be paid until this rule change is effective. Distributions payable on Class C Units that accrue before such effectiveness will be held in a segregated account until such effectiveness. If this rule filing does not become effective by July 1, 2016, a Subscriber may terminate its involvement in the VPR Program and any and all distributions with respect to Class C Units payable to that Subscriber held in the segregated account will be released back to Holdings and distributed to existing Members in accordance with the terms of the Holdings LLC Agreement. *Id* at 4612.

<sup>22</sup> See proposed Restated Holdings LLC Agreement Section 8.1.

<sup>23</sup> "Free Cash Flow" means consolidated net income, plus depreciation, less capital expenditures (in each case calculated in accordance with generally accepted accounting principles in the United States, as in effect from time to time) of Holdings and BOX, for the calendar year. See proposed Restated Holdings LLC Agreement Section 1.1.

<sup>17</sup> See proposed Restated Holdings LLC Agreement Section 18.1(b)(iii).

<sup>18</sup> See proposed Restated Holdings LLC Agreement Section 4.1.

expenses of Holdings, or (iii) required as a reserve to make reasonable provision to pay other claims and obligations then known to, or reasonably anticipated by, BOX or Holdings. When, as and if declared by the Holdings Board, Holdings will make the cash distribution to each Member pro rata in accordance with the number of Units held by each Member, which will be determined by multiplying the aggregate Annual Distribution amount by each Member's Percentage Interest<sup>24</sup> on the record date. Distributions to Class C Members may be adjusted as provided in the Members Agreement.<sup>25</sup>

#### Transfers

Class C Units are not expected to be registered for resale by Holdings and may not be transferred without complying with, or qualifying for an exemption from, the registration requirements of the Securities Act. Any Transferee of Class C Units must become a party to the Members Agreement and the Restated Holdings LLC Agreement as a condition to the transfer.

Transfers of Class C Units will be subject to certain rights of first refusal. Before a Class C Member may transfer Class C Units to a transferee that is not an Affiliate, the Class C Member must first offer to sell the Class C Units to Holdings on the same terms<sup>26</sup> and, to the extent Holdings does not exercise its primary right of first refusal, the Class C Units must then be offered to the other Class C Members on the same terms.<sup>27</sup>

Class C Units will include pre-emptive rights. In the event Holdings proposes to issue and sell new equity securities of Holdings, other than for certain customary exceptions, a Class C Member will have the right to maintain its percentage ownership in Holdings represented by the Class C Units it holds, by electing to purchase from Holdings, on the same terms, a percentage of the new securities equal to the percentage of all outstanding securities of Holdings represented by

the outstanding Class C Units held by the Class C Member.<sup>28</sup>

Class C Units will be subject to co-sale rights. In the event a Class C Member proposes to Transfer Voting Class C Units (a "Transferring Member") to a transferee that is not an Affiliate, each other Class C Member will have the right to sell a portion of its Voting Class C Units to the transferee on the same terms. All Class C Members that elect to exercise this right of co-sale may, collectively, sell a number of Voting Class C Units equal to one-half (1/2) of the total number of Voting Class C Units proposed to be sold by the Transferring Member. If more than one Class C Member elects to exercise this co-sale right, the number of Voting Class C Units each may sell will be divided pro rata among them based upon their relative ownership of Voting Class C Units.<sup>29</sup>

Class C Units will be subject to drag-along rights. In the event that holders of at least seventy-five percent (75%) of the then outstanding Voting Units, including at least seventy-five percent (75%) of the then outstanding Voting Class C Units (collectively, the "Selling Members") approve a sale of Holdings in writing, specifying that the drag-along rights will apply to the transaction, then each Class C Member will be required to approve, cooperate and participate as a seller of Class C Units in the transaction, subject to certain customary exceptions.<sup>30</sup>

#### Miscellaneous

The Holdings LLC Agreement currently requires, and the Restated Holdings LLC Agreement will continue to require, that, so long as MX US 2, Inc. and its Affiliates own 4% or more of Holdings, it shall not invest in more than 5%, or participate in the creation and/or operation of, a competing business (the "Non-compete Covenant"). The proposed Restated Holdings LLC Agreement provides that, upon vesting of VPRs associated with Class C Units equal to at least 10% of the total outstanding Units, the Non-compete Covenant will automatically expire and be of no further effect.

Additional structural, technical and non-substantive changes to the Holdings LLC Agreement are proposed to accommodate the substantive changes described above.

#### 2. Statutory Basis

The Exchange believes the proposed rule change is consistent with the Act and the rules and regulations thereunder applicable to the Exchange and, in particular, the requirements of Section 6(b) of the Act.<sup>31</sup> Specifically, the Exchange believes that its proposed rule change is consistent with Section 6(b)(5) of the Act<sup>32</sup> in that it is designed to prevent fraudulent and manipulative acts and practices, to promote just and equitable principles of trade, to foster cooperation and coordination with persons engaged in facilitating transactions in securities, to remove impediments to and perfect the mechanisms of a free and open market and a national market system and, in general, to protect investors and the public interest. Additionally, the Exchange believes the proposed rule change is consistent with the requirement in Section 6(b)(5) of the Act<sup>33</sup> that the rules of an exchange not be designed to permit unfair discrimination between customers, issuers, brokers, or dealers. The Exchange also believes the proposed rule change is consistent with Section 6(b)(1) of the Act,<sup>34</sup> which requires that the Exchange be so organized and have the capacity to be able to carry out the purposes of the Act and to comply, and to enforce compliance by its members and persons associated with its members, with the provisions of the Act, the rules and regulations thereunder, and the rules of the Exchange.

#### Ownership

The Exchange believes that continuing to apply the existing limitations on the percentage ownership of Holdings by Participants is just and equitable and not unfairly discriminatory because it will protect all Members, including Participants, by ensuring that no Participant will be permitted to vote more than a 20% ownership interest in Holdings. Therefore, no Participant will be able to assert excessive influence over Holdings. The diverse ownership of Holdings will enhance the Exchange's ability to enforce compliance by Holdings with the provisions of the Act, the rules and regulations thereunder, and the rules of the Exchange. Further, the diverse ownership of Holdings will promote just and equitable principles of trade, foster cooperation and coordination with persons engaged in

<sup>24</sup> "Percentage Interest" with respect to a Member means the ratio of the number of Units held by the Member to the total of all of the issued Units, expressed as a percentage and determined with respect to each class of Units, whenever applicable. "Units" means Class A Membership Units, Class B Membership Units and Class C Membership Units of Holdings, whether or not associated with vested VPRs. See proposed Restated Holdings LLC Agreement Section 1.1.

<sup>25</sup> See proposed Restated Holdings LLC Agreement Section 8.1 and *see supra*, note 5.

<sup>26</sup> See proposed Restated Holdings LLC Agreement Section 7.2.

<sup>27</sup> See proposed Restated Holdings LLC Agreement Section 7.3(b).

<sup>28</sup> See proposed Restated Holdings LLC Agreement Section 7.3(c).

<sup>29</sup> See proposed Restated Holdings LLC Agreement Section 7.6(c).

<sup>30</sup> See proposed Restated Holdings LLC Agreement Section 7.7.

<sup>31</sup> 15 U.S.C. 78f(b).

<sup>32</sup> 15 U.S.C. 78f(b)(5).

<sup>33</sup> *Id.*

<sup>34</sup> 15 U.S.C. 78f(b)(1).

facilitating transactions in securities, remove impediments to and perfect the mechanisms of a free and open market and a national market system and, in general, protect investors and the public interest. The Exchange believes that the limit is reasonable and not unfairly discriminatory because each Participant Member may vote up to 20% so there is no risk that the limit will prevent a Participant with substantial ownership from being adequately represented.

The Exchange believes that the conversion of Class C Units associated with vested VPRs into Class A Units at the end of the VPR Program is just and equitable and not unfairly discriminatory. Class A Units are the primary ownership unit of Holdings. The conversion is just and equitable and not unfairly discriminatory because, at the end of the VPR Program, each Subscriber will be rewarded with Class A Units to the extent it has met its obligations under the VPR Program.

#### Voting

Limiting voting on matters submitted to a vote of all holders of Units to Class C Units that are associated with vested VPRs is just and equitable and not unfairly discriminatory because the Exchange does not believe it would be fair to treat Class C Units associated with unvested VPRs in the same manner as Class C Units associated with vested VPRs when it comes to matters of voting since vested VPRs in the VPR Program have satisfied certain requirements that provide value to Holdings in return for establishing a voting interest in Holdings. Additionally, the Exchange believes it is reasonable to exclude Class C Units associated with unvested VPRs from voting because Subscribers holding unvested VPRs are still able to provide input and make recommendations to Holdings through the VPR Program.<sup>35</sup>

The Exchange believes that allowing the expiration of the Major Action Veto upon vesting of VPRs associated with Class C Units equal to at least 25% of the total outstanding Units is reasonable and not unfairly discriminatory because it will allow all Members to exert influence over the affairs and direction of Holdings in percentages more closely aligned with their respective ownership percentages. Eliminating the Major Action Veto from both the Restated Holdings LLC Agreement and the Limited Liability Company Agreement of BOX is just and equitable and not unfairly discriminatory because it will allow Holdings and BOX to undertake a broader range of actions without

allowing a single Member to block such actions.

The new supermajority voting requirement that Members holding at least 67% of all outstanding Voting Units must vote to approve Supermajority Actions is fair and reasonable because it will ensure sufficient oversight of the commercial affairs of Holdings and that any Supermajority Action undertaken is necessary, appropriate and in the best interest of Holdings and the Members. Additionally, supermajority voting will provide adequate safeguards and affirmative approval of significant changes to Holdings and will serve to protect the interest of the Members. The Exchange further believes that the supermajority voting provision is important given the new, more diverse ownership structure of Holdings. Specifically, requiring supermajority voting will ensure any substantial change in BOX will have to be approved by more than a simple majority.

The proposed rule change will foster key changes to the governance of Holdings. Equity issued pursuant to the proposed rule change and in connection with the VPR Program is intended to reduce the ownership percentage of the existing majority owner of Holdings, MX US 2, Inc., below fifty percent (50%). If Subscribers meet expected order flow commitments pursuant to the VPR Program, the ownership of Holdings by current Members, including MX US 2, Inc., will be diluted such that no single Member will have a majority ownership.

The elimination of the Major Action Veto, the addition of supermajority voting provisions, and the dilution of MX US 2, Inc.'s ownership below fifty percent (50%) will give Members other than MX US 2, Inc. increased voting power and enhance the Exchange's ability to enforce compliance by Holdings with the Act and the rules of the Exchange. Further, such voting provisions will promote just and equitable principles of trade, foster cooperation and coordination with persons engaged in facilitating transactions in securities, remove impediments to and perfect the mechanisms of a free and open market and a national market system and, in general, protect investors and the public interest.

Requiring the written consent of Class C Members holding at least seventy-five percent (75%) of then outstanding Class C Units for any amendment to the Restated Holdings LLC Agreement that alters the terms of one or more classes of Units in a manner that would materially, adversely and

disproportionately (as compared with other classes of Units) affect the rights associated with the Class C Units as a class is fair, reasonable and not unfairly discriminatory because it will protect Class C Units from being unfairly disadvantaged relative to the other classes of Units and will prevent the other classes of Units from unfairly discriminating against the Class C Units.

#### Directors

The Exchange believes that setting the number of Directors that a Member can designate is fair, reasonable and not unfairly discriminatory because it will ensure that the Holdings Board has broad representation and that no single Member will be able to exert undue control and influence over the Holdings Board. The diverse makeup of the Holdings Board will enhance the Exchange's ability to enforce compliance by Holdings with the provisions of the Act, the rules and regulations thereunder, and the rules of the Exchange. Further, the Exchange believes that broad representation will be beneficial because it will foster cooperation and coordination, will contribute to the identification of opportunities for innovation and will enhance competition. The Exchange further believes that the various percentage thresholds for determining the number of Directors a Member can designate fosters cooperation and coordination with persons engaged in facilitating transactions in securities, removes impediments to and perfect the mechanisms of a free and open market and a national market system, protects investors and the public interest, and are just and equitable and not unfairly discriminatory because such thresholds generally align Members' economic interests with their respective representation on the Holdings Board. Further, the purpose of the VPR Program is to reward Subscribers that execute orders on the Exchange; the percentage thresholds for determining the number of Directors a Member is permitted to designate will reward those Members that contribute to the success of the Exchange by allowing them to designate additional Directors to the Holdings Board. The limitations on designated members of the Executive Committee of Holdings is fair, reasonable and not unfairly discriminatory because the Executive Committee has oversight responsibility over the affairs of Holdings and the Exchange believes it is reasonable to limit the membership of the Executive Committee to those Members that have a greater economic interest in Holdings.

<sup>35</sup> See *supra*, note 20.

## Distributions

The Exchange believes that the proposed distribution provisions are consistent with the Act and protects investors and the public interest because all financial and regulatory needs of the Exchange and BOX will be provided for in determining the amount each distribution. This rule change ensures that no funds necessary for the regulation of the Exchange or BOX will be distributed to the Members of Holdings and will provide the Exchange with the financial ability to carry out the purposes of the Act, to comply and to enforce compliance with the provisions of the Act and the rules and regulations thereunder, including the rules of the Exchange, to prevent fraudulent and manipulative acts and practices, to promote just and equitable principles of trade and to foster cooperation and coordination with persons engaged in regulating, clearing, settling, processing information with respect to, and facilitating transaction in securities.

## Transfers

The Exchange believes that the limitations on transferring Class C Units are fair, reasonable and not unfairly discriminatory. Specifically, requiring any such Transferee to become a party to the Members Agreement and the Restated Holdings LLC Agreement as a condition of a transfer fosters cooperation and coordination with persons engaged in facilitating transactions in securities, removes impediments to and perfect the mechanisms of a free and open market and a national market system, protects investors and the public interest, is just and equitable and not unfairly discriminatory because all Members are required to be parties to the Members Agreement and the Restated Holdings LLC Agreement, which ensures that the rule change will apply to all Members. The limitation on transferring Class C Units to a transferee that is not an Affiliate is just and equitable and not unfairly discriminatory because it preserves the rights of the other Members by protecting their ownership stake in Holdings. Further, the proposed rights of first refusal, pre-emptive rights, co-sale rights and drag-along rights are reasonable and not unfairly discriminatory as these rights provide stability among the ownership group, allow Members to participate in opportunities for third party transactions and protect the nature of the investment made by each Member. All of the proposed limitations on equity transfers enhance the Exchange's capacity and ability to carry out the

purposes of the Act and to comply, and to enforce compliance by its members and persons associated with its members, with the provisions of the Act, the rules and regulations thereunder, and the rules of the Exchange.

## Miscellaneous

The Exchange believes that the proposed rule change to permit the potential future expiration of the non-compete obligation of MX US 2, Inc. fosters cooperation and coordination with persons engaged in facilitating transactions in securities, removes impediments to and perfect the mechanisms of a free and open market and a national market system, protects investors and the public interest, and is just and equitable and not unfairly discriminatory. Currently, this restriction applies only to MX US 2, Inc. and not to other Members of Holdings. The expiration of this non-compete obligation was approved by the existing Members and will only take effect if MX US 2, Inc. becomes a minority Member of Holdings by reducing its ownership to less than fifty percent (50%) of the outstanding equity of Holdings. The expiration of this existing restriction will place all Members of Holdings on equal footing with respect to other investments they wish to make.

### *B. Self-Regulatory Organization's Statement on Burden on Competition*

The Exchange does not believe that the proposed rule change will impose any burden on competition that is not necessary or appropriate in furtherance of the purposes of the Act. The Exchange believes that the proposed rule change will improve competition by providing market participants with an incentive to consider and utilize another market, BOX, when determining where to execute options contracts and post liquidity.

The Exchange believes that the proposed rule change will help the Exchange achieve the goals of the VPR Program to increase both intermarket and intramarket competition by incenting Subscribers to direct their orders to the Exchange, which will enhance the quality of quoting and increase the volume of contracts traded there. Notwithstanding these incentives, Subscribers will still be free to send orders to other markets, even if they have not met their volume commitment for that measurement period; thus the proposed change will not impose a burden on competition among exchanges. To the extent an additional competitive burden on non-Subscribers is imposed by the proposed rule change,

the Exchange believes that this is appropriate because the VPR Program should incent Participants to direct additional order flow to the Exchange and thus provide additional liquidity, which enhances the quality of BOX and increases the volume of options traded on BOX. To the extent that this purpose is achieved, all of the Exchange's Participants, even non-Subscribers, should benefit from the improved market liquidity. Enhanced market quality and increased transaction volume that results from the anticipated increase in order flow directed to the Exchange will benefit all market participants and improve competition on the Exchange.

Given the robust competition for volume among options markets, many of which offer the same products, implementing rule changes to help achieve the goals of a program to attract order flow like the VPR Program is consistent with the above-mentioned goals of the Act. This is especially true for a smaller options exchange, such as BOX, which is competing for volume with much larger exchanges that dominate the options trading industry. BOX captures a relatively modest percentage of the average daily trading volume in options, so it is unlikely that the rule change could cause any competitive harm to the options market generally or to market participants. Rather, the proposed rule change, which will allow BOX to fully implement the governance provisions of the VPR Program, is an attempt by a small options market to attract order volume away from larger competitors by adopting an innovative pricing strategy.

Finally, the proposed rule change will permit an increase in the diversity of ownership of Holdings such that no one entity will have a majority ownership of Holdings. Upon the issuance of Class C Units to Subscribers, the ownership of Holdings will be distributed among more holders and distributed more evenly among existing holders. If there is full participation in the VPR Program, then the ownership of Holdings by its majority owner will be diluted and no single Member will have a majority ownership of Holdings.

### *C. Self-Regulatory Organization's Statement on Comments on the Proposed Rule Change Received from Members, Participants, or Others*

The Exchange has neither solicited nor received comments on the proposed rule change.

### III. Date of Effectiveness of the Proposed Rule Change and Timing for Commission Action

Within 45 days of the date of publication of this notice in the **Federal Register** or within such longer period (i) as the Commission may designate up to 90 days of such date if it finds such longer period to be appropriate and publishes its reasons for so finding or (ii) as to which the self-regulatory organization consents, the Commission will:

- (A) by order approve or disapprove the proposed rule change, or
- (B) institute proceedings to determine whether the proposed rule change should be disapproved.

### IV. Solicitation of Comments

Interested persons are invited to submit written data, views, and arguments concerning the foregoing, including whether the proposed rule change is consistent with the Act. Comments may be submitted by any of the following methods:

#### *Electronic Comments*

- Use the Commission's Internet comment form (<http://www.sec.gov/rules/sro.shtml>); or
- Send an email to [rule-comments@sec.gov](mailto:rule-comments@sec.gov). Please include File Number SR-BOX-2015-22 on the subject line.

#### *Paper Comments*

- Send paper comments in triplicate to Secretary, Securities and Exchange Commission, 100 F Street, NE., Washington, DC 20549-1090. All submissions should refer to File Number SR-BOX-2015-22. This file number should be included on the subject line if email is used. To help the Commission process and review your comments more efficiently, please use only one method. The Commission will post all comments on the Commission's Internet Web site (<http://www.sec.gov/rules/sro.shtml>). Copies of the submission, all subsequent amendments, all written statements with respect to the proposed rule change that are filed with the Commission, and all written communications relating to the proposed rule change between the Commission and any person, other than those that may be withheld from the public in accordance with the provisions of 5 U.S.C. 552, will be available for Web site viewing and printing in the Commission's Public Reference Room, 100 F Street, NE., Washington, DC 20549, on official business days between the hours of 10:00 a.m. and 3:00 p.m. Copies of such filing also will be available for

inspection and copying at the principal office of the Exchange. All comments received will be posted without change; the Commission does not edit personal identifying information from submissions. You should submit only information that you wish to make available publicly. All submissions should refer to File Number SR-BOX-2015-22, and should be submitted on or before August 3, 2015.

For the Commission, by the Division of Trading and Markets, pursuant to delegated authority.<sup>36</sup>

**Brent J. Fields,**

*Secretary.*

[FR Doc. 2015-16975 Filed 7-10-15; 8:45 am]

BILLING CODE 8011-01-P

## SECURITIES AND EXCHANGE COMMISSION

[Release No. 34-75372; File No. SR-Phlx-2015-52]

### Self-Regulatory Organizations; NASDAQ OMX PHLX LLC; Notice of Filing and Immediate Effectiveness of Proposed Rule Change Relating to the Volume-Based and Multi-Trigger Threshold

July 7, 2015.

Pursuant to Section 19(b)(1) of the Securities Exchange Act of 1934 ("Act")<sup>1</sup>, and Rule 19b-4 thereunder,<sup>2</sup> notice is hereby given that on June 22, 2015, NASDAQ OMX PHLX LLC ("Phlx" or "Exchange") filed with the Securities and Exchange Commission ("SEC" or "Commission") the proposed rule change as described in Items I and II, below, which Items have been prepared by the Exchange. The Commission is publishing this notice to solicit comments on the proposed rule change from interested persons.

#### I. Self-Regulatory Organization's Statement of the Terms of Substance of the Proposed Rule Change

The Exchange proposes to adopt a new Rule 1095 entitled "Automated Removal of Market Maker Quotes" of the rules governing Phlx. The Exchange proposes to adopt two new Phlx Market

Maker<sup>3</sup> risk protections, a volume-based threshold and a multi-trigger threshold.<sup>4</sup>

The text of the proposed rule change is available on the Exchange's Web site at <http://nasdaqomxphlx.cchwallstreet.com/>, at the principal office of the Exchange, and at the Commission's Public Reference Room.

#### II. Self-Regulatory Organization's Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change

In its filing with the Commission, the Exchange included statements concerning the purpose of and basis for the proposed rule change and discussed any comments it received on the proposed rule change. The text of these statements may be examined at the places specified in Item IV below. The Exchange has prepared summaries, set forth in sections A, B, and C below, of the most significant aspects of such statements.

##### A. Self-Regulatory Organization's Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change

###### 1. Purpose

The purpose of the filing is to adopt two new risk protections for Phlx specialists, SQTs and RSQTs (collectively "Market Makers") to monitor marketplace risk. These protections are intended to assist Market Makers to control their trading risks.<sup>5</sup> Quoting across many series in an option creates the possibility of "rapid fire" executions that can create large, unintended principal positions that expose Market Makers, who are required to continuously quote in assigned options, to potentially significant

<sup>3</sup> A "Market Maker" includes Registered Options Traders ("ROTs") (Rule 1014(b)(i) and (ii)), which includes Streaming Quote Traders ("SQTs") (see Rule 1014(b)(ii)(A)) and Remote Streaming Quote Traders ("RSQTs") (see Rule 1014(b)(ii)(B)). An SQT is defined in Exchange Rule 1014(b)(ii)(A) as an ROT who has received permission from the Exchange to generate and submit option quotations electronically in options to which such SQT is assigned. An RSQT is defined in Exchange Rule 1014(b)(ii)(B) as an ROT that is a member or member organization with no physical trading floor presence who has received permission from the Exchange to generate and submit option quotations electronically in options to which such RSQT has been assigned. An RSQT may only submit such quotations electronically from off the floor of the Exchange. A Market Maker also includes a specialist, an Exchange member who is registered as an options specialist pursuant to Rule 1020(a).

<sup>4</sup> Market Makers will be required to continue to utilize the Risk Monitor Mechanism in Rule 1093, as is the case today.

<sup>5</sup> See Rule 1014 entitled "Obligations and Restrictions Applicable to Specialists and Registered Options Traders."

<sup>36</sup> 17 CFR 200.30-3(a)(12).

<sup>1</sup> 15 U.S.C. 78s(b)(1).

<sup>2</sup> 17 CFR 240.19b-4.

market risk. Today, the Exchange's rules permit Market Makers to monitor risk arising from multiple executions across multiple options series of a single underlying security.<sup>6</sup>

The Exchange is proposing to offer a new volume-based and multi-trigger threshold protection to Market Makers. The Exchange proposes to adopt a new Rule 1095, entitled, "Automated Removal of Market Maker Quotes," to establish: (1) a threshold used to calculate each Market Maker's total volume executed in all series of an underlying security within a specified time period and compares that to a pre-determined threshold ("Volume-Based Threshold"), and (2) a threshold used to measure the number of times the Phlx XL system ("System") has triggered<sup>7</sup> based on the Risk Monitor Mechanism ("Percentage-Based Threshold") pursuant to Rule 1093 and Volume-Based Thresholds within a specified time period and compares that total to a pre-determined threshold ("Multi-Trigger Threshold").

#### Volume-Based Threshold

In connection with offering these two new threshold protections, a Market Maker would provide a specified time period and volume threshold by which the Exchange's System would automatically remove the Market Maker's quotes in *all series of an underlying security*, depending on the threshold utilized, submitted through designated Phlx protocols, as specified by the Exchange. The Exchange counts Specialized Quote Feed ("SQF")<sup>8</sup> quotes only in determining the number of contracts traded and removed by the System.

The Volume-Based Threshold will determine, during a specified time period established by the Market Maker not to exceed 15 seconds ("Volume-Based Specified Time Period"), whether a Market Maker executed a number of contracts which equals or exceeds the designated number of contracts specified by the Market Maker in all series of an underlying security to determine whether to remove the Market Maker's quotes in all series of

the underlying security.<sup>9</sup> The Volume-Based Threshold will be based on the total number of contracts executed in the market in the same options series in an underlying security and will not offset the number of contracts executed on the opposite side of the market. Once the System determines that the number of contracts executed equals or exceeds a number established by the Market Maker during the Volume-Based Specified Time Period, the System will remove Market Maker's quotes. The Volume-Based Specified Time Period designated by the Market Maker must be the same length of time as designated for purposes of the Percentage-Based Threshold in Rule 1093.

A Volume-Based Specified Time Period will commence for an option every time an execution occurs in any series in such option and will continue until the System automatically removes quotes as described in newly proposed sections (iv) or (v) or the Volume-Based Specified Time Period expires. The Volume-Based Specified Time Period operates on a rolling basis among all series in an option in that there may be multiple Volume-Based Specified Time Periods occurring simultaneously and such Volume-Based Specified Time Periods may overlap.<sup>10</sup>

#### Multi-Trigger Threshold

A Market Maker or Market Maker Group, which is defined as multiple affiliated Market Makers,<sup>11</sup> may provide the specified time period and number of allowable triggers by which the Exchange will automatically remove quotes in all options series in all underlying issues submitted through designated Phlx protocols, as specified by the Exchange ("Multi-Trigger Threshold"). During a specified time period established by the Market Maker not to exceed 15 seconds ("Multi-Trigger Specified Time Period"), the number of times the System automatically removes the Market Maker's or Group's quotes in all options series will be based on the number of triggers of the Percentage-Based Threshold, described in proposed section (ii) [sic], as well as the Volume-Based Threshold described in proposed

(ii).<sup>12</sup> For purposes of this rule, a trigger shall be defined as the event which causes the System to automatically remove quotes in all options series in all underlying issues. Once the System determines that the number of triggers equals or exceeds a number established by either the Market Maker or Group, during a Multi-Trigger Specified Time Period, the System will automatically remove all quotes in all options series in all underlying issues for that Market Maker or Group. A Multi-Trigger Specified Time Period will commence after every trigger of either the Percentage-Based Threshold or the Volume-Based Threshold and will continue until the System removes quotes as described in section (iv) of the proposed rule or the Multi-Trigger Specified Time Period expires. Members may configure the Multi-Trigger Threshold at the badge level (by Market Maker) or by Group (multiple affiliated Market Makers), but not both. This is different as compared to the Percentage-Based Threshold in Rule 1093 or the newly proposed Volume-Based Thresholds that are configured only on the badge level (by Market Maker).<sup>13</sup> The System counts triggers within a Multi-Trigger Specified Time Period across all options for the Market Maker or Group. A Multi-Trigger Specified Time Period operates on a rolling basis in that there may be multiple Multi-Trigger Specified Time Periods occurring simultaneously and such Multi-Trigger Specified Time Periods may overlap.

The System will automatically remove quotes in all options in an underlying security when the Volume-Based Threshold has been reached. The System will automatically remove quotes in all options in all underlying securities when the Multi-Trigger Threshold has been reached.<sup>14</sup> The

<sup>6</sup> See Phlx Rule 1093, entitled "Phlx XL Risk Monitor Mechanism." The Percentage Based Threshold compares each Market Maker's executed volume to the total volume disseminated in that series or underlying, and then triggers a protective response when that percentage exceeds the percentage the Market Maker has determined to be acceptable.

<sup>7</sup> A trigger is defined as the event which causes the System to automatically remove all quotes in all options series in an underlying issue.

<sup>8</sup> SQF permits the receipt of quotes.

<sup>9</sup> The System's count of the number of contracts executed is based on trading interest resting on the Exchange book.

<sup>10</sup> *Id.*

<sup>11</sup> This would be more than one Market Maker, but does not require the aggregation of all the member's Market Makers. A Group would be comprised of Market Makers affiliated with one member or member organization. The member or member organization would be required to define a Group by providing a list of such affiliated Market Makers to the Exchange.

<sup>12</sup> Today, ISE's functionality permits market maker quotes to be removed from the ISE trading system if a specified number of curtailment events occur across both ISE and ISE Gemini, LLC ("ISE Gemini"). ISE and ISE Gemini's trading systems will count the number of times a market maker's pre-set curtailment events occur on each exchange and aggregate them. Once a market maker's specified number of curtailment events across both markets is reached, the trading systems will remove the market maker's quotes in all classes on both ISE and ISE Gemini. ISE will then reject any quotes sent by the market maker after the parameters across both exchanges have been triggered until the market maker notifies the market operations staff of ISE that it is ready to come out of its curtailment. See Securities Exchange Release No. 73147 (September 19, 2014), 79 FR 57639 (September 25, 2014) (SR-ISE-2014-09) (Order approving proposed rule change related to market maker risk parameters).

<sup>13</sup> See proposed new Rule 1095(iii).

<sup>14</sup> The specified time period for the Volume-Based Threshold and the Multi-Trigger Threshold may differ. The specified time period for the

System will send a Purge Notification Message<sup>15</sup> to the Market Maker for all affected options when the above thresholds have been reached.

The two thresholds, Volume-Based Threshold and Multi-Trigger Threshold operate independently of each other. The triggering of the Volume-Based Threshold would occur independently of that of the Multi-Trigger Threshold. The Multi-Trigger Threshold is somewhat dependent on the Volume-Based Threshold to the extent that the Volume-Based Threshold serves as a trigger for the Multi-Trigger Threshold. Quotes will be automatically executed up to the Market Maker's size regardless of whether the quote exceeds the Volume-Based Threshold.<sup>16</sup>

If a Market Maker requests the System to remove quotes in all options series in all underlying issues, the System will automatically reset the Volume-Based Specified Time Period(s). The Multi-Trigger Specified Time Period(s) will not automatically reset for the Multi-Trigger Threshold.<sup>17</sup>

When the System removes quotes as a result of the Volume-Based Threshold, the Market Maker must send a re-entry indicator to re-enter the System. When the System removes quotes as a result of the Multi-Trigger Threshold, the System will not accept quotes through designated protocols until the Market Maker manually requests re-entry.<sup>18</sup> After quotes are removed as a result of the Multi-Trigger Threshold, Exchange staff must set a re-entry indicator in this case to enable re-entry, which will cause the System to send a Reentry Notification Message to the Market Maker for all options series in all underlying issues.<sup>19</sup> The Market Maker's Clearing Firm will be notified regarding the trigger and re-entry into the System after quotes are removed as a result of the Multi-Trigger Threshold, provided the Market Maker's Clearing Firm has requested to receive such notification.<sup>20</sup> The System will then reset all counters to zero and re-entry and continued trading will be

permitted. A Market Maker is subject to continuous quoting obligations<sup>21</sup> despite the removal of quotes from the System and approval process for re-entry.

Today, the Exchange provides Market Makers with the Percentage-Based Threshold in Rule 1093 to monitor risk.<sup>22</sup> The Exchange will continue to require Market Makers to utilize the Percentage-Based Threshold. The Volume-Based Threshold and the Multi-Trigger Threshold will be optional.

The Exchange reserved subsection (i) for future modifications to this rule.

The Exchange proposes to implement this rule within thirty (30) days of the operative date.

Example #1 of the Volume-Based Threshold is displayed below. Presume the following order book:

Series of underlying XYZ	Size on bid x offer for MM1
100 Strike Call .....	300x300
100 Strike Put .....	50x50
110 Strike Call .....	200x200
110 Strike Put .....	150x150

In this example, assume the Specified Time Period designated by the Market Maker # 1 is 10 seconds and the designated number of contracts permitted for the Volume-Based Threshold is 250 contracts. Assume at 12:00:00, the Market Maker # 1 executes all of his offer size, 200 contracts, in the 110 Strike Calls. The System will initiate the Specified Time Period and for 10 seconds the System will count all volume executed in series of underlying XYZ. If at any point during that 10 second period, the Market Maker # 1 executes additional contracts in any series of underlying XYZ, those contracts will be added to the initial execution of 200 contracts. To illustrate, assume at 12:00:05 the Market Maker # 1 executes 60 contracts of his offer in the 100 Strike Calls. The total volume executed is now 260 contracts. Since that volume exceeds the Market Maker #1's designated number of contracts for the Volume-Based Threshold (250 contracts), all of his quotes in all series of underlying XYZ over the designated protocols will be removed from the System; no quotes will be executed in series XYZ until the Market Maker enters new quotes in series XYZ. The Volume-Based Specified Time Period will be reset for Market Maker #1 in underlying XYZ and Market Maker #1 will need to send a re-entry indicator in

order to re-enter quotes in options series for underlying XYZ into the System.

Example #2 of the Volume-Based Threshold: Similar to the example above, assume the Specified Time Period is 10 seconds and the designated number of contracts permitted for the Volume-Based Threshold is 250 contracts. Assume at 12:00:00, Market Maker #1 executes all of his offer size, 200 contracts, in the 110 Strike Calls. The System will initiate the Specified Time Period and for 10 seconds the System will count all volume executed in series of underlying XYZ. If at any point during that 10 second period, Market Maker #1 executes additional contracts in any series of underlying XYZ, those contracts will be added to the initial execution of 200 contracts. Then assume at 12:00:05 Market Maker #1 executes 20 contracts of his offer in the 100 Strike Calls. The total volume executed is 220 contracts which does not exceed the Volume-Based Threshold. This second execution initiates another Specified Time Period so there are two open time periods, the first with 5 seconds remaining and a new 10 second time period. At 12:00:10, the first timer period expires and the initial execution of 200 contracts is no longer counted toward the designated number of contracts permitted for the Volume-Based Threshold. Further assume at 12:00:12, which is outside of the initial time period but still within 10 seconds of the second execution of 20 contracts, another execution occurs with Market Maker #1 executing 230 contracts of his bid in the 100 Strike Calls. This total volume executed toward the Volume-Based Threshold within the Specified Time Period is now 250 contracts which equals the designated number of contracts permitted causing the System to remove all quotes in all series of underlying XYZ over the designated protocols for Market Maker #1 to be removed from the System; no quotes will be executed in series XYZ until the Market Maker enters new quotes in series XYZ. The Volume-Based Specified Time Period will be reset for Market Maker #1 in underlying XYZ and Market Maker #1 will need to send a re-entry indicator in order to re-enter quotes in options series for underlying XYZ into the System. This example displays the rolling basis in which the Specified Time Period operates.

Example #3: In order to illustrate the Multi-Trigger Threshold, assume Example #1 and Example #2 provided above occurred in options series of two different underlyings rather than all in options series of underlying XYZ and for two separate Market Makers (MM#1

Volume-Based Threshold must be the same as the Percentage-Based Threshold in Rule 1093.

<sup>15</sup> A message entitled "Purge Notification Message" is systemically sent to the Market Maker upon the removal of quotes due to Volume-Based Threshold or Multi-Trigger Threshold.

<sup>16</sup> See proposed new Rule 1095(iii).

<sup>17</sup> See proposed new Rule 1095(iv).

<sup>18</sup> In the interest of maintaining fair and orderly markets, the Exchange believes it is important that Market Makers communicate their readiness to Exchange staff in a non-automated manner, such as by email or telephone.

<sup>19</sup> See proposed new Rule 1095(v).

<sup>20</sup> Phlx Rule 1016 permits the Exchange to share Market Maker designated risk settings in the System with the Clearing Firm.

<sup>21</sup> See note 3.

<sup>22</sup> An initial default value is set for each Market Maker.



for Example #1 and MM#2 for Example #2) of the same member organization. Assume a Group is defined by the member organization and is comprised of the MM #1 and MM #2. Further assume the member organization has defined the Multi-Trigger Specified Time Period as 10 seconds and the number of allowable triggers as two. Based on the aforementioned examples, a Multi-Trigger Specified Time Period commences at 12:00:05 when MM#1 triggers the Volume-Based Threshold. This Volume-Based Threshold triggers counts as the first trigger toward the Multi-Trigger Threshold for the Group. Another Multi-Trigger Specified Time Period is initiated at 12:00:12 when MM#2 triggers the Volume-Based Threshold (per Example #2). This Volume-Based Threshold trigger counts as the second trigger toward the Multi-Trigger Threshold for the Group since it is within the Multi-Trigger Specified Time Period of the first trigger. Since the member organization designated two triggers for the number of allowable triggers, the Group, both MM#1 and MM#2, quotes in all option series in all underlying issues for the Group are automatically removed from the System and Purge Notification Messages are sent to the Group; no quotes will be executed in series XYZ until the Market Maker enters new quotes in series XYZ. The member organization will need to contact the Exchange to request Exchange staff to enable re-entry into the System. The Exchange proposes to implement this rule within thirty (30) days of the operative date. The Exchange will issue an Options Trader Alert in advance to inform market participants of such date.

## 2. Statutory Basis

The Exchange believes that its proposal is consistent with Section 6(b) of the Act<sup>23</sup> in general, and furthers the objectives of Section 6(b)(5) of the Act<sup>24</sup> in particular, in that it is designed to promote just and equitable principles of trade, to remove impediments to and perfect the mechanism of a free and open market and a national market system, and, in general to protect investors and the public interest, by enhancing the risk protections available to Exchange members. The proposal promotes policy goals of the Commission which has encouraged execution venues, exchange and non-exchange alike, to enhance risk protection tools and other mechanisms to decrease risk and increase stability.

The individual firm benefits of enhanced risk protections flow downstream to counter-parties both within and without the Exchange, thereby increasing systemic protections as well. Additionally, because the Exchange offers these risk tools to Market Makers, in order to encourage them to provide as much liquidity as possible and encourage market making generally, the proposal removes impediments to and perfects the mechanism of a free and open market and a national market system and protect investors and the public interest.

With respect to permitting the Multi-Trigger Threshold to be set either to one Market Maker or to a number of specified Market Makers affiliated with a member, it is important to note that the risk to Market Makers is not limited to a single series in an option but to all series in an option. Market Makers that quote in multiple series of multiple options have significant exposure, requiring them to offset or hedge their overall positions. The proposed functionality will be useful for Market Makers, who are required to continuously quote in assigned options classes on the Exchange. Quoting across many series in an option or multiple options creates the possibility of executions that can create large, unintended principal positions that could expose market makers to unnecessary risk. The Multi-Trigger Threshold functionality is intended to assist Market Makers manage that risk at the Group level so that Market Makers may provide deep and liquid markets to the benefit of all investors.

The Exchange further represents that its proposal will operate consistently with the firm quote obligations of a broker-dealer pursuant to Rule 602 of Regulation NMS and that the functionality is not mandatory. Specifically, any interest that is executable against a Market Maker's quotes that are received<sup>25</sup> by the Exchange prior to the time either of these functionalities are engaged will be automatically executed at the price up to the Market Maker's size, regardless of whether such execution results in executions in excess of the Market Maker's pre-set parameters.

With respect to providing risk settings to the Market Maker's Clearing Member, each Member that transacts through a Clearing Member on the Exchange executes a Letter of Guarantee wherein the Clearing Member accepts financial responsibility for all Exchange

transactions made by the Member on whose behalf the Clearing Member submits the letter of guarantee. The Exchange believes that because Clearing Members guarantee all transactions on behalf of a Member, and therefore, bear the risk associated with those transactions, it is appropriate for Clearing Members to have knowledge of what risk settings a Market Maker may utilize within the System and should be provided and receive notice of re-entry into the System after triggering the Multi-Trigger Threshold.

## B. Self-Regulatory Organization's Statement on Burden on Competition

The Exchange does not believe that the proposed rule change will impose any burden on competition not necessary or appropriate in furtherance of the purposes of the Act. Specifically, the proposal will not impose a burden on intra-market or inter-market competition, rather it provides Market Makers with the opportunity to avail themselves of similar risk tools which are currently available on other exchanges.<sup>26</sup> The proposal does not impose a burden on inter-market competition, because members may choose to become market makers on a number of other options exchanges, which may have similar but not identical features.<sup>27</sup> The proposed rule change is meant to protect Market Makers from inadvertent exposure to excessive risk. Accordingly, the proposed rule change will have no impact on competition.

Further, the Exchange is proposing this rule change at the request of its Market Makers to further reduce their risk in the event the Market Maker is suffering from a systems issue or due to the occurrence of unusual or unexpected market activity. The proposed Group parameter for the Multi-Trigger threshold will protect Market Makers from inadvertent exposure to excessive risk at the Group level. Reducing such risk will enable Market Makers to enter quotations without any fear of inadvertent exposure to excessive risk, which in turn will benefit investors through increased liquidity for the execution of their orders. Such increased liquidity benefits investors because they receive better prices and because it lowers volatility in the options market.

The Exchange believes that requiring Market Makers to enter values for the Percentage-Based Threshold is not

<sup>26</sup> See Section 8 of the 19b4.

<sup>27</sup> See BATS Rule 21.16, BOX Rules 8100 and 8110, C2 Rule 8.12, CBOE Rule 8.18, ISE Rule 804(g), MIAX Rule 612, NYSE MKT Rule 928NY and NYSE Arca Rule 6.40.

<sup>23</sup> 15 U.S.C. 78f(b).

<sup>24</sup> 15 U.S.C. 78f(b)(5).

<sup>25</sup> The time of receipt for an order or quote is the time such message is processed by the Exchange book.

unreasonably burdensome because Market Makers can enter an out-of-range value so that the Exchange-provided risk protections will not be triggered. Reducing risk by utilizing the proposed risk protections will enable Market Makers to enter quotations with larger size, which in turn will benefit investors through increased liquidity for the execution of their orders. Such increased liquidity benefits investors because they receive better prices and because it lowers volatility in the options market.

*C. Self-Regulatory Organization's Statement on Comments on the Proposed Rule Change Received From Members, Participants, or Others*

No written comments were either solicited or received.

**III. Date of Effectiveness of the Proposed Rule Change and Timing for Commission Action**

Because the foregoing proposed rule change does not: (i) Significantly affect the protection of investors or the public interest; (ii) impose any significant burden on competition; and (iii) become operative for 30 days from the date on which it was filed, or such shorter time as the Commission may designate, it has become effective pursuant to Section 19(b)(3)(A)(ii) of the Act<sup>28</sup> and subparagraph (f)(6) of Rule 19b-4 thereunder.<sup>29</sup> The Exchange has requested that the Commission waive the thirty-day operative delay so that the proposal may become operative immediately. The Exchange states that waiving the thirty-day operative delay will enable Market Makers to enhance their risk controls and risk management processes without additional delay. The Commission believes that waiving the thirty day delay is consistent with the protection of investors and the public interest. Therefore, the Commission hereby waives the thirty-day operative delay and designates the proposal effective upon filing.<sup>30</sup>

At any time within 60 days of the filing of the proposed rule change, the Commission summarily may temporarily suspend such rule change if it appears to the Commission that such

action is: (i) Necessary or appropriate in the public interest; (ii) for the protection of investors; or (iii) otherwise in furtherance of the purposes of the Act. If the Commission takes such action, the Commission shall institute proceedings to determine whether the proposed rule should be approved or disapproved.

**IV. Solicitation of Comments**

Interested persons are invited to submit written data, views, and arguments concerning the foregoing, including whether the proposed rule change is consistent with the Act. Comments may be submitted by any of the following methods:

*Electronic Comments*

- Use the Commission's Internet comment form (<http://www.sec.gov/rules/sro.shtml>); or
- Send an email to [rule-comments@sec.gov](mailto:rule-comments@sec.gov). Please include File Number SR-Phlx-2015-52 on the subject line.

*Paper Comments*

- Send paper comments in triplicate to Secretary, Securities and Exchange Commission, 100 F Street NE., Washington, DC 20549-1090.

All submissions should refer to File Number SR-Phlx-2015-52. This file number should be included on the subject line if email is used. To help the Commission process and review your comments more efficiently, please use only one method. The Commission will post all comments on the Commission's Internet Web site (<http://www.sec.gov/rules/sro.shtml>).

Copies of the submission, all subsequent amendments, all written statements with respect to the proposed rule change that are filed with the Commission, and all written communications relating to the proposed rule change between the Commission and any person, other than those that may be withheld from the public in accordance with the provisions of 5 U.S.C. 552, will be available for Web site viewing and printing in the Commission's Public Reference Room, 100 F Street NE., Washington, DC 20549, on official business days between the hours of 10:00 a.m. and 3:00 p.m. Copies of the filing also will be available for inspection and copying at the principal office of the Exchange. All comments received will be posted without change; the Commission does not edit personal identifying information from submissions. You should submit only information that you wish to make available publicly.

All submissions should refer to File Number SR-Phlx-2015-52 and should

be submitted on or before August 3, 2015.

For the Commission, by the Division of Trading and Markets, pursuant to delegated authority.<sup>31</sup>

**Brent J. Fields,**  
*Secretary.*

[FR Doc. 2015-16973 Filed 7-10-15; 8:45 am]

BILLING CODE 8011-01-P

**SECURITIES AND EXCHANGE COMMISSION**

[Release No. 34-75381; File No. SR-CBOE-2015-065]

**Self-Regulatory Organizations; Chicago Board Options Exchange, Incorporated; Notice of Filing and Immediate Effectiveness of a Proposed Rule Change to Extend a Pilot Program that Eliminates Position and Exercise Limits for Physically-Settled SPDR S&P 500 ETF Trust ("SPY") Options**

July 7, 2015.

Pursuant to Section 19(b)(1) of the Securities Exchange Act of 1934 (the "Act"),<sup>1</sup> and Rule 19b-4 thereunder,<sup>2</sup> notice is hereby given that on July 1, 2015, Chicago Board Options Exchange, Incorporated (the "Exchange" or "CBOE") filed with the Securities and Exchange Commission ("Commission") the proposed rule change as described in Items I and II below, which Items have been prepared by the Exchange. The Commission is publishing this notice to solicit comments on the proposed rule change from interested persons.

**I. Self-Regulatory Organization's Statement of the Terms of the Substance of the Proposed Rule Change**

The text of the proposed rule change is available on the Exchange's Web site (<http://www.cboe.com/AboutCBOE/CBOELegalRegulatoryHome.aspx>), at the Exchange's Office of the Secretary, and at the Commission's Public Reference Room.

**II. Self-Regulatory Organization's Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change**

In its filing with the Commission, the Exchange included statements concerning the purpose of and basis for the proposed rule change and discussed any comments it received on the proposed rule change. The text of these statements may be examined at the places specified in Item IV below. The

<sup>28</sup> 15 U.S.C. 78s(b)(3)(a)(ii).

<sup>29</sup> 17 CFR 240.19b-4(f)(6). In addition, Rule 19b-4(f)(6) requires a self-regulatory organization to give the Commission written notice of its intent to file the proposed rule change at least five business days prior to the date of filing of the proposed rule change, or such shorter time as designated by the Commission. The Exchange has satisfied this requirement.

<sup>30</sup> For purposes of waiving the 30-day operative delay, the Commission has considered the proposed rule's impact on efficiency, competition, and capital formation. See 15 U.S.C. 78c(f).

<sup>31</sup> 17 CFR 200.30-3(a)(12).

<sup>1</sup> 15 U.S.C. 78s(b)(1).

<sup>2</sup> 17 CFR 240.19b-4.

Exchange has prepared summaries, set forth in sections A, B, and C below, of the most significant aspects of such statements.

*A. Self-Regulatory Organization's Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change*

1. Purpose

The Exchange proposes to amend Interpretation and Policy .07 to Rule 4.11 (Position Limits) to extend the duration of the SPY Pilot Program.<sup>3</sup> The SPY Pilot Program is currently scheduled to expire on July 12, 2015 and this proposal would extend the SPY Pilot Program through July 12, 2016. There are no substantive changes being proposed to the SPY Pilot Program.

In proposing to extend the SPY Pilot Program, the Exchange reaffirms its consideration of several factors that supported its original proposal to establish the SPY Pilot Program, which include: (1) the liquidity of the option and the underlying security; (2) the market capitalization of the underlying security and the securities that make up the S&P 500 Index; (3) options reporting requirements; and (4) financial requirements imposed by CBOE and the Commission.

When the SPY Pilot Program was most recently renewed in January 2015, CBOE submitted a report providing an analysis of the SPY Pilot Program covering the first twelve months during which the SPY Pilot Program was in effect (the "Pilot Report"). In the January extension, the Exchange stated that if it were to submit a proposal to either extend the SPY Pilot Program, adopt the SPY Pilot Program on a permanent basis, or terminate the SPY Pilot Program, it would submit another Pilot Report covering the period since the previous extension.<sup>4</sup> Accordingly, the Exchange is submitting another Pilot Report that details CBOE's experience with the SPY Pilot Program. The Pilot Report now includes the period of January 2015 through May 2015. The Pilot Report is attached as Exhibit 3. CBOE notes that it is unaware of any problems created by the SPY Pilot Program and does not foresee any as a result of the proposed extension. In extending the SPY Pilot Program, the Exchange states that if CBOE were to propose another extension, permanent

approval or termination of the SPY Pilot Program, the Exchange will submit another Pilot Report covering the period since the previous extension, which will be submitted at least 30 days before the end of the proposed extension. If the SPY Pilot Program is not extended or adopted on a permanent basis by July 12, 2016, position limits in SPY will revert to their Pre-Pilot levels.

2. Statutory Basis

The Exchange believes the proposed rule change is consistent with the Securities Exchange Act of 1934 (the "Act") and the rules and regulations thereunder applicable to the Exchange and, in particular, the requirements of Section 6(b) of the Act.<sup>5</sup> Specifically, the Exchange believes the proposed rule change is consistent with the Section 6(b)(5)<sup>6</sup> requirements that the rules of an exchange be designed to prevent fraudulent and manipulative acts and practices, to promote just and equitable principles of trade, to remove impediments to and perfect the mechanism of a free and open market and a national market system, and, in general, to protect investors and the public interest. Specifically, the Exchange believes that extending the SPY Pilot Program promotes just and equitable principles of trade by permitting market participants, including market makers, institutional investors and retail investors, to establish greater positions when pursuing their investment goals and needs. Extending the SPY Pilot Program will give the Exchange and the Commission additional time to evaluate the pilot and its effect on the market.

*B. Self-Regulatory Organization's Statement on Burden on Competition*

The Exchange does not believe that the proposed rule change will impose any burden on competition that is not necessary or appropriate in furtherance of the purposes of the Act. The proposed rule change is not designed to address any aspect of competition, whether between the Exchange and its competitors, or among market participants. Instead, the proposed rule change is designed to allow the SPY Pilot Program to continue as the Exchange expects other SROs will propose similar extensions.

*C. Self-Regulatory Organization's Statement on Comments on the Proposed Rule Change Received from Members, Participants, or Others*

The Exchange neither solicited nor received comments on the proposed rule change.

**III. Date of Effectiveness of the Proposed Rule Change and Timing for Commission Action**

Because the foregoing proposed rule change does not: (i) significantly affect the protection of investors or the public interest; (ii) impose any significant burden on competition; and (iii) become operative for 30 days from the date on which it was filed, or such shorter time as the Commission may designate, it has become effective pursuant to Section 19(b)(3)(A) of the Act and Rule 19b-4(f)(6) thereunder.<sup>7</sup>

A proposed rule change filed pursuant to Rule 19b-4(f)(6) under the Act<sup>8</sup> normally does not become operative for 30 days after the date of its filing. However, Rule 19b-4(f)(6)(iii)<sup>9</sup> permits the Commission to designate a shorter time if such action is consistent with the protection of investors and the public interest. The Exchange has asked the Commission to waive the 30-day operative delay, noting that such waiver will allow the Exchange to extend the pilot program prior to its expiration on July 12, 2015. In addition, the Exchange believes that waiver of the operative delay is consistent with the protection of investors and the public interest because it will allow for the least amount of market disruption as the pilot will continue as it currently does maintaining the status quo. The Commission believes that waiving the 30-day operative delay is consistent with the protection of investors and the public interest. Therefore, the Commission hereby waives the operative delay and designates the proposed rule change operative upon filing.<sup>10</sup>

At any time within 60 days of the filing of the proposed rule change, the Commission summarily may temporarily suspend such rule change if it appears to the Commission that such

<sup>3</sup> See Securities Exchange Act Release Nos. 67937 (September 27, 2012), 77 FR 60489 (October 3, 2012) (SR-CBOE-2012-091); 70878 (November 14, 2013), 78 FR 69737 (November 20, 2013) (SR-CBOE-2013-106) and 74149 (January 27, 2015) 80 FR 5606 (February 2, 2015) (SR-CBOE-2015-008).

<sup>4</sup> See 80 FR at 5607.

<sup>5</sup> 15 U.S.C. 78f(b).

<sup>6</sup> 15 U.S.C. 78f(b)(5).

<sup>7</sup> 17 CFR 240.19b-4(f)(6). As required under Rule 19b-4(f)(6)(iii), the Exchange provided the Commission with written notice of its intent to file the proposed rule change, along with a brief description and the text of the proposed rule change, at least five business days prior to the date of filing of the proposed rule change, or such shorter time as designated by the Commission.

<sup>8</sup> 17 CFR 240.19b-4(f)(6).

<sup>9</sup> 17 CFR 240.19b-4(f)(6)(iii).

<sup>10</sup> For purposes only of waiving the 30-day operative delay, the Commission has considered the proposed rule's impact on efficiency, competition, and capital formation. See 15 U.S.C. 78c(f).

action is necessary or appropriate in the public interest, for the protection of investors, or otherwise in furtherance of the purposes of the Act. If the Commission takes such action, the Commission shall institute proceedings to determine whether the proposed rule should be approved or disapproved.

#### IV. Solicitation of Comments

Interested persons are invited to submit written data, views, and arguments concerning the foregoing, including whether the proposed rule change is consistent with the Act. Comments may be submitted by any of the following methods:

##### *Electronic Comments*

- Use the Commission's Internet comment form (<http://www.sec.gov/rules/sro.shtml>); or
- Send an email to [rule-comments@sec.gov](mailto:rule-comments@sec.gov). Please include File Number SR-CBOE-2015-065 on the subject line.

##### *Paper Comments*

- Send paper comments in triplicate to Brent J. Fields, Secretary, Securities and Exchange Commission, 100 F Street NE., Washington, DC 20549-1090. All submissions should refer to File Number SR-CBOE-2015-065. This file number should be included on the subject line if email is used. To help the Commission process and review your comments more efficiently, please use only one method. The Commission will post all comments on the Commission's Internet Web site (<http://www.sec.gov/rules/sro.shtml>). Copies of the submission, all subsequent amendments, all written statements with respect to the proposed rule change that are filed with the Commission, and all written communications relating to the proposed rule change between the Commission and any person, other than those that may be withheld from the public in accordance with the provisions of 5 U.S.C. 552, will be available for Web site viewing and printing in the Commission's Public Reference Room, 100 F Street, NE., Washington, DC 20549 on official business days between the hours of 10:00 a.m. and 3:00 p.m. Copies of such filing also will be available for inspection and copying at the principal office of the Exchange. All comments received will be posted without change; the Commission does not edit personal identifying information from submissions. You should submit only information that you wish to make available publicly. All submissions should refer to File Number SR-CBOE-

2015-065, and should be submitted on or before August 3, 2015.

For the Commission, by the Division of Trading and Markets, pursuant to delegated authority.<sup>11</sup>

**Brent J. Fields,**  
Secretary.

[FR Doc. 2015-16981 Filed 7-10-15; 8:45 am]

BILLING CODE 8011-01-P

## SECURITIES AND EXCHANGE COMMISSION

[Release No. 34-75376; File No. SR-NYSEArca-2015-18]

### Self-Regulatory Organizations; NYSE Arca, Inc.; Order Granting Approval of Proposed Rule Change Relating to Listing and Trading Under NYSE Arca Equities Rule 5.2(j)(3), Commentary .02 of Shares of the Vanguard Tax-Exempt Bond Index Fund

July 7, 2015.

#### I. Introduction

On April 6, 2015, NYSE Arca, Inc. ("Exchange" or "NYSE Arca") filed with the Securities and Exchange Commission ("Commission"), pursuant to Section 19(b)(1) of the Securities Exchange Act of 1934 ("Act")<sup>1</sup> and Rule 19b-4 thereunder,<sup>2</sup> a proposed rule change to list and trade under NYSE Arca Equities Rule 5.2(j)(3), Commentary .02, the shares ("Shares") of the Vanguard Tax-Exempt Bond Index Fund ("Fund"). The proposed rule change was published for comment in the **Federal Register** on April 16, 2015.<sup>3</sup> On May 26, 2015, the Commission extended the time period in which to approve the proposed rule change, disapprove the proposed rule change, or institute proceedings to determine whether the proposed rule change should be disapproved.<sup>4</sup> The Commission received no comments on the proposed rule change. This order grants approval of the proposed rule change.

#### II. Description of the Proposed Rule Change

The Exchange proposes to list and trade Shares of the Fund under NYSE Arca Equities Rule 5.2(j)(3), Commentary .02, which governs the listing and trading of Investment Company Units ("Units") based on fixed income securities indexes. The Fund is

a series of the Vanguard Municipal Bond Funds Trust ("Trust").<sup>5</sup> The Vanguard Group, Inc. will be the investment adviser to the Fund ("Adviser"). State Street Bank and Trust Company will serve as custodian for the Fund. Vanguard Marketing Corporation will be the distributor for the Shares.

##### *A. Principal Investments of the Fund*

According to the Exchange, the Fund will seek to track the performance of a benchmark index that measures the investment-grade segment of the U.S. municipal bond market, as described below. The Fund will invest by sampling its benchmark index, meaning that it will hold a range of securities that, in the aggregate, approximates the full index in terms of key risk factors and other characteristics. All of the Fund's investments will be selected through the sampling process, and, under normal circumstances,<sup>6</sup> at least 80% of the Fund's assets will be invested in securities held in its benchmark index. Under normal circumstances, at least 80% of the Fund's income will be exempt from federal income taxes.

According to the Exchange, the Fund has proposed to use the Standard & Poor's National AMT-Free Municipal Bond Index ("Index") as its benchmark index.<sup>7</sup> The Index includes municipal bonds from issuers that are primarily state or local governments or agencies whose interest is exempt from U.S. federal income taxes and the federal alternative minimum tax ("AMT"). To be eligible for inclusion in the Index, each bond must have a rating of at least investment-grade, as determined by a nationally recognized statistical rating organization (e.g., at least BBB-by Fitch Ratings, Inc.); be denominated in U.S.

<sup>5</sup> The Exchange represents that, on January 6, 2015, the Trust filed a registration statement ("Registration Statement") on Form N-1A under the Securities Act of 1933 and the Investment Company Act of 1940 ("1940 Act") (File Nos. 2-57689 and 811-02687). According to the Exchange, the Trust has obtained certain exemptive relief from the Commission under the 1940 Act. See Investment Company Act Release No. 27773 (April 2, 2007) (File No. 812-13336).

<sup>6</sup> According to the Exchange, term "under normal circumstances" includes, but is not limited to, the absence of extreme volatility or trading halts in the fixed income markets or the financial markets generally; operational issues causing dissemination of inaccurate market information; or force majeure type events such as systems failure, natural or man-made disaster, act of God, armed conflict, act of terrorism, riot or labor disruption, or any similar intervening circumstance.

<sup>7</sup> S&P Dow Jones Indices ("S&P") is the "Index Provider" with respect to the Index. According to the Exchange, the Index Provider is not a broker-dealer or affiliated with a broker-dealer and has implemented procedures designed to prevent the use and dissemination of material, non-public information regarding the Index.

<sup>11</sup> 17 CFR 200.30-3(a)(12).

<sup>15</sup> U.S.C. 78s(b)(1).

<sup>2</sup> 17 CFR 240.19b-4.

<sup>3</sup> See Securities Exchange Act Release No. 74701 (April 10, 2015), 80 FR 20529 ("Notice").

<sup>4</sup> See Securities Exchange Act Release No. 75042, 80 FR 31090 (June 1, 2015).

dollars; and have a minimum par amount of \$25 million. In addition, to be included in the Index, each bond must have a minimum term to maturity and/or pre-refunded or call date greater than or equal to one calendar month. The following bond types are specifically excluded from the Index: bonds subject to the AMT; commercial paper; derivative securities (inverse floaters, forwards, swaps); housing bonds; insured conduit bonds where the obligor is a for-profit institution; non-insured conduit bonds; non-rated bonds; notes; taxable municipals; tobacco bonds; and variable rate debt. Each bond in the Index must be a constituent of a deal where the deal's original offering amount was at least \$100 million. Index constituents normally undergo a review and rebalancing once a month. At each monthly rebalancing, no one issuer can represent more than 25% of the weight of the Index, and individual issuers that represent at least 5% of the weight of the Index cannot account for more than 50% of the weight of the Index in the aggregate.

#### B. Other Investments

According to the Exchange, while under normal circumstances, at least 80% of the Fund's assets will be invested in securities held in its benchmark index, as described above, the Fund may invest up to 20% of its assets in other securities and financial instruments. According to the Exchange, examples of these other securities and financial instruments are nonpublic, investment-grade securities, generally referred to as 144A securities, as well as smaller public issues or medium-term notes not included in its benchmark index because of the small size of the issue. The Fund may invest in non-investment-grade securities, variable and floating rate securities, exchange-traded funds, hybrid instruments, Build America Bonds, variable-rate demand-preferred securities issued by closed-end municipal bond funds, and tender option bond programs. Other investments subject to the 20% limit also include U.S. Treasury futures contracts, exchange-traded and over-the-counter ("OTC") options on such futures contracts, exchange-traded and OTC fixed income options, centrally cleared and non-centrally cleared interest rate swaps, centrally cleared and non-centrally cleared total return swaps, and centrally cleared and non-centrally cleared credit default swaps.

#### C. Investment Restrictions

According to the Exchange, the Fund may invest in other investment

companies to the extent permitted by applicable law or Commission exemption and consistent with Section 12(d)(1) of the 1940 Act. The Fund may hold up to an aggregate amount of 15% of its net assets in illiquid assets (calculated at the time of investment), including Rule 144A securities deemed illiquid by the Adviser, in accordance with Commission guidance. The Fund will monitor its portfolio liquidity on an ongoing basis to determine whether, in light of current circumstances, an adequate level of liquidity is being maintained, and will consider taking appropriate steps in order to maintain adequate liquidity if, through a change in values, net assets, or other circumstances, more than 15% of the Fund's net assets are held in illiquid securities.

The Exchange states that the Fund is classified as diversified within the meaning of the 1940 Act<sup>8</sup> and that the Fund intends to maintain the required level of diversification and otherwise conduct its operations so as to qualify as a "regulated investment company" for purposes of the Internal Revenue Code of 1986.<sup>9</sup>

#### D. NYSE Arca Equities Rule 5.2(j)(3)

The Exchange submitted this proposed rule change because the Index for the Fund does not meet all of the "generic" listing requirements of Commentary .02 to NYSE Arca Equities Rule 5.2(j)(3) applicable to the listing of Units based on fixed income securities indexes. The Exchange represented that the Index meets all such requirements except for those set forth in Commentary .02(a)(2).<sup>10</sup> Specifically, as of February 7, 2015, 33.69% of the weight of the Index components have a minimum original principal amount outstanding of \$100 million or more.

Additional information regarding the Trust, the Fund, and the Shares, including investment strategies, risks, creation and redemption procedures, fees, portfolio holdings, distributions, and taxes, among other things, is included in the Notice and Registration Statement, as applicable.<sup>11</sup>

<sup>8</sup> The diversification standard is set forth in Section 5(b)(1) of the 1940 Act.

<sup>9</sup> 26 U.S.C. 851.

<sup>10</sup> Commentary .02(a)(2) to NYSE Arca Equities Rule 5.2(j)(3) provides that components that in the aggregate account for at least 75% of the weight of the index or portfolio each shall have a minimum original principal amount outstanding of \$100 million or more.

<sup>11</sup> See Notice and Registration Statement, *supra* notes 3 and 5, respectively.

### III. Discussion and Commission's Findings

After careful review, the Commission finds that the proposed rule change is consistent with the requirements of Section 6 of the Act<sup>12</sup> and the rules and regulations thereunder applicable to a national securities exchange.<sup>13</sup> In particular, the Commission finds that the proposal is consistent with Section 6(b)(5) of the Act,<sup>14</sup> which requires, among other things, that the Exchange's rules be designed to promote just and equitable principles of trade, to remove impediments to, and perfect the mechanism of, a free and open market and a national market system, and, in general, to protect investors and the public interest.

The Commission finds that the proposal to list and trade the Shares on the Exchange is consistent with Section 11A(a)(1)(C)(iii) of the Act,<sup>15</sup> which sets forth Congress' finding that it is in the public interest and appropriate for the protection of investors and the maintenance of fair and orderly markets to assure the availability to brokers, dealers, and investors of information with respect to quotations for, and transactions in, securities. Quotation and last-sale information for the Shares will be available via the Consolidated Tape Association ("CTA") high-speed line. The current value of the Index will be widely disseminated by one or more major market data vendors<sup>16</sup> at least once per day, as required by NYSE Arca Equities Rule 5.2(j)(3), Commentary .02(b)(ii). In addition, an Intraday Indicative Value ("IIV") for the Shares of the Fund will be disseminated by one or more major market data vendors and updated at least every 15 seconds during the Core Trading Session (9:30 a.m. to 4:00 p.m. Eastern Time).<sup>17</sup> Information regarding market price and trading volume of the Shares will be continually available on a real-time basis throughout the day on brokers' computer screens and other electronic services. The Web site for the Fund will include the prospectus for the Fund and additional data relating to net asset

<sup>12</sup> 15 U.S.C. 78f.

<sup>13</sup> In approving this proposed rule change, the Commission has considered the proposed rule's impact on efficiency, competition, and capital formation. See 15 U.S.C. 78c(f).

<sup>14</sup> 17 U.S.C. 78f(b)(5).

<sup>15</sup> 15 U.S.C. 78k-1(a)(1)(C)(iii).

<sup>16</sup> The Exchange further states that the components of the Index and their percentage weighting will be available from major market data vendors.

<sup>17</sup> See NYSE Arca Equities Rule 5.2(j)(3), Commentary .02(c). According to the Exchange, several major market data vendors display and/or make widely available IIVs taken from the CTA or other data feeds. See Notice, *supra* note 3, at n.17.

value (“NAV”) and other applicable quantitative information. The portfolio of securities held by the Fund will also be disclosed monthly on the Fund’s Web site.

The Commission believes that the proposal to list and trade the Shares is reasonably designed to promote fair disclosure of information that may be necessary to price the Shares appropriately and to prevent trading when a reasonable degree of transparency cannot be assured. The Exchange states that the Index Provider is not a broker-dealer or affiliated with a broker-dealer, and has implemented procedures designed to prevent the use and dissemination of material, non-public information regarding the Index.<sup>18</sup> Prior to the commencement of trading, the Exchange will inform its Equity Trading Permit Holders (“ETP Holders”) in an Information Bulletin of the special characteristics and risks associated with trading the Shares. With respect to trading halts, if the Exchange becomes aware that the NAV is not being disseminated to all market participants at the same time, it will halt trading in the Shares until such time as the NAV is available to all market participants. In addition, the Exchange may consider all relevant factors in exercising its discretion to halt or suspend trading in the Shares of the Fund. Trading may be halted because of market conditions or for reasons that, in the view of the Exchange, make trading in the Shares inadvisable. The Exchange represents that, if the IIV or the Index value is not being disseminated as required, the Exchange may halt trading during the day in which the interruption to the dissemination of the IIV or Index value occurs. If the interruption to the dissemination of the IIV or Index value persists past the trading day in which it occurred, the Exchange will halt trading. Moreover, trading in Shares of the Fund will be halted if the circuit breaker parameters in NYSE Arca Equities Rule 7.12 have been reached or because of market conditions or for reasons that, in the view of the Exchange, make trading in the Shares inadvisable. Further, trading in the Shares will be subject to NYSE Arca Equities Rule 7.34, which sets forth additional circumstances under which Shares of the Fund may be halted.

*Based on the Exchange’s representations, the Commission believes that the Index is sufficiently broad-based to deter potential manipulation. As of February 7, 2015, 98.72% of the weight of the Index*

components was composed of individual maturities that were part of an entire municipal bond offering with a minimum original principal amount outstanding of \$100 million or more for all maturities of the offering. In addition, the total dollar amount outstanding of issues in the Index was approximately \$2.424 billion and the average dollar amount outstanding of issues in the Index was approximately \$60 million. Further, the Index is composed of approximately 10,015 component issues and 969 unique issuers, and the most heavily weighted component represents 0.27% of the weight of the Index and the five most heavily weighted components represent 0.96% of the weight of the Index. In addition, the average daily notional trading volume for Index components for the period from January 2, 2014 to December 31, 2014 was \$1,272,356,609 and the sum of the notional trading volumes for the same period was \$318,089,152,147.

In support of this proposal, the Exchange has made representations, including:

(1) Except for Commentary .02(a)(2) to NYSE Arca Equities Rule 5.2(j)(3), the Shares of the Fund currently satisfy all of the generic listing standards under NYSE Arca Equities Rule 5.2(j)(3).

(2) The initial and continued listing standards under NYSE Arca Equities Rules 5.2(j)(3) and 5.5(g)(2) applicable to Units shall apply to the Shares.

(3) The Shares will comply with all other requirements applicable to Units including, but not limited to, requirements relating to the dissemination of key information, such as the value of the Index and IIV, rules governing the trading of equity securities, trading hours, trading halts, surveillance, and the Information Bulletin to ETP Holders (each as described in more detail in the Notice and Registration Statement, as applicable), as set forth in Exchange rules applicable to Units and prior Commission orders approving the generic listing rules applicable to the listing and trading of Units.

(4) The Exchange represents that trading in the Shares will be subject to the existing trading surveillances, administered by the Financial Industry Regulatory Authority (“FINRA”) on behalf of the Exchange, which are designed to detect violations of Exchange rules and applicable federal securities laws.<sup>19</sup> The Exchange

represents that these procedures are adequate to properly monitor Exchange trading of the Shares in all trading sessions and to deter and detect violations of Exchange rules and federal securities laws applicable to trading on the Exchange.

(5) FINRA, on behalf of the Exchange, will communicate as needed regarding trading in the Shares with other markets or other entities that are members of the Intermarket Surveillance Group (“ISG”), and FINRA may obtain trading information regarding trading in the Shares from such markets or entities. FINRA also can access data obtained from the Municipal Securities Rulemaking Board relating to municipal bond trading activity for surveillance purposes in connection with trading in the Shares. The Exchange also may obtain information regarding trading in the Shares from markets or other entities that are members of ISG or with which the Exchange has in place a comprehensive surveillance sharing agreement.

(6) For initial and continued listing of the Shares, the Trust is required to comply with Rule 10A–3 under the Act.<sup>20</sup>

(7) The Fund generally will invest at least 80% of its assets in the securities of the Index.

(8) The Fund may at times invest up to 20% of its assets in other securities and financial instruments as described in further detail in the Notice.

This approval order is based on all of the Exchange’s representations, including those set forth above and in the Notice, and the Exchange’s description of the Fund.

For the foregoing reasons, the Commission finds that the proposed rule change is consistent with Section 6(b)(5) of the Act<sup>21</sup> and the rules and regulations thereunder applicable to a national securities exchange.

#### IV. Conclusion

*It is therefore ordered*, pursuant to Section 19(b)(2) of the Act,<sup>22</sup> that the proposed rule change (SR–NYSEArca–2015–18) be, and it hereby is, approved.

For the Commission, by the Division of Trading and Markets, pursuant to delegated authority.<sup>23</sup>

**Brent J. Fields,**  
Secretary.

[FR Doc. 2015–16977 Filed 7–10–15; 8:45 am]

**BILLING CODE 8011–01–P**

<sup>19</sup> According to the Exchange, FINRA surveils trading on the Exchange pursuant to a regulatory services agreement. The Exchange is responsible for FINRA’s performance under this regulatory services agreement.

<sup>20</sup> See 17 CFR 240.10A–3.

<sup>21</sup> 15 U.S.C. 78f(b)(5).

<sup>22</sup> 15 U.S.C. 78s(b)(2).

<sup>23</sup> 17 CFR 200.30–3(a)(12).

<sup>18</sup> See *supra* note 7 and accompanying text.

## SECURITIES AND EXCHANGE COMMISSION

[Release No. 34-75380; File No. SR-DTC-2015-003]

### Self-Regulatory Organizations; The Depository Trust Company; Notice of Withdrawal of Proposed Rule Change Regarding the Acknowledgment of End-of-Day Net-Net Settlement Balances by Settling Banks

July 7, 2015.

On April 15, 2015, The Depository Trust Company (“DTC”) filed with the Securities and Exchange Commission (“Commission”) proposed rule change SR-DTC-2015-003 (“Proposed Rule Change”) pursuant to Section 19(b)(1) of the Securities Exchange Act of 1934<sup>1</sup> and Rule 19b-4 thereunder regarding the acknowledgment of End-of-Day Net-Net Settlement Balances by Settling Banks.<sup>2</sup> The Proposed Rule Change was published for comment in the *Federal Register* on May 5, 2015.<sup>3</sup> The Commission received one comment letter to the Proposed Rule Change.<sup>4</sup> On June 5, 2015, DTC extended the date for Commission action on the Proposed Rule Change to August 3, 2015. On July 1, 2015, DTC withdrew the Proposed Rule Change (SR-DTC-2015-003).

For the Commission, by the Division of Trading and Markets, pursuant to delegated authority.<sup>5</sup>

**Brent J. Fields,**  
Secretary.

[FR Doc. 2015-16979 Filed 7-10-15; 8:45 am]

BILLING CODE 8011-01-P

## SECURITIES AND EXCHANGE COMMISSION

[Release No. 34-75378; File No. SR-CBOE-2015-067]

### Self-Regulatory Organizations; Chicago Board Options Exchange, Incorporated; Notice of Filing and Immediate Effectiveness of a Proposed Rule Change to Delay Implementation of Tied to Stock Marking Requirement for Certain Orders

July 7, 2015.

Pursuant to Section 19(b)(1) of the Securities Exchange Act of 1934 (the

“Act”),<sup>1</sup> and Rule 19b-4 thereunder,<sup>2</sup> notice is hereby given that on July 1, 2015, Chicago Board Options Exchange, Incorporated (the “Exchange” or “CBOE”) filed with the Securities and Exchange Commission (the “Commission”) the proposed rule change as described in Items I and II below, which Items have been prepared by the Exchange. The Exchange filed the proposal as a “non-controversial” proposed rule change pursuant to Section 19(b)(3)(A)(iii) of the Act<sup>3</sup> and Rule 19b-4(f)(6) thereunder.<sup>4</sup> The Commission is publishing this notice to solicit comments on the proposed rule change from interested persons.

#### I. Self-Regulatory Organization’s Statement of the Terms of Substance of the Proposed Rule Change

The Exchange proposes to delay the implementation of the marking requirement set forth in Rule 6.53(y) with respect to certain orders. There is no proposed change to the rule text.

#### II. Self-Regulatory Organization’s Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change

In its filing with the Commission, the Exchange included statements concerning the purpose of and basis for the proposed rule change and discussed any comments it received on the proposed rule change. The text of these statements may be examined at the places specified in Item IV below. The Exchange has prepared summaries, set forth in sections A, B, and C below, of the most significant aspects of such statements.

##### A. Self-Regulatory Organization’s Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change

###### 1. Purpose

On August 13, 2014, the Securities and Exchange Commission (the “Commission”) approved CBOE Rules 6.53(y) and 15.2A.<sup>5</sup> Rule 6.53(y) defines a tied to stock order<sup>6</sup> and requires the

representing Trading Permit Holder to include an indicator on each tied to stock order upon systemization, subject to certain exceptions. Rule 15.2A requires, in a manner and form prescribed by the Exchange, each Trading Permit Holder (“TPH”), on the business day following the order execution date, to report to the Exchange certain information regarding the executed stock or convertible security legs of qualified contingent cross (“QCC”) orders,<sup>7</sup> stock-option orders and other tied to stock orders that the TPH executed on the Exchange that trading day. The Exchange stated in rule filing SR-CBOE-2014-040 that it would issue a circular announcing the implementation date for these rules within 90 days of the date of filing, which implementation date would be within 180 days of the date of filing.

On January 7, 2015, CBOE submitted a rule filing to delay the implementation of these rules based on feedback it received from TPHs.<sup>8</sup> The Exchange stated in that rule filing that it would issue a circular announcing the implementation date for the rules within 90 days of the date of the rule

security” and, together with underlying stock, “non-option”).

<sup>7</sup> A QCC order is an order to buy (sell) at least 1,000 standard option contracts or 10,000 mini-option contracts that is identified as being part of a qualified contingent trade coupled with a contra-side order to sell (buy) an equal number of contracts. These orders may only be entered in the standard increments applicable to simple orders in the options class under Rule 6.42. For purposes of this order type, a “qualified contingent trade” is a transaction consisting of two or more component orders, executed as agent or principal, where: (a) at least one component is an NMS stock, as defined in Rule 600 of Regulation NMS under the Act; (b) all components are effected with a product or price contingency that either has been agreed to by all the respective counterparties or arranged for by a broker-dealer as principal or agent; (c) the execution of one component is contingent upon the execution of all other components at or near the same time; (d) the specific relationship between the component orders (e.g., the spread between the prices of the component orders) is determined by the time the contingent order is placed; (e) the component orders bear a derivative relationship to one another, represent different classes of shares of the same issuer, or involve the securities of participants in mergers or with intentions to merge that have been announced or cancelled; and (f) the transaction is fully hedged (without regard to any prior existing position) as a result of other components of the contingent trade. QCC orders may execute without exposure provided the execution is not at the same price as a public customer order resting in the electronic book and is at or between the national best bid or offer. A QCC order will be cancelled if it cannot be executed. See Rule 6.53(u). The Exchange notes that it deactivated the QCC functionality effective August 11, 2014 and will announce any reactivation of QCC functionality by Regulatory Circular. See Regulatory Circular RG14-121.

<sup>8</sup> Securities Exchange Act Release No. 34-74067 (January 15, 2015), 80 FR 3267 (January 22, 2015) (SR-CBOE-2015-004) (notice of immediate effectiveness of rule filing).

<sup>1</sup> 15 U.S.C. 78s(b)(1).

<sup>2</sup> 17 CFR 240.19b-4.

<sup>3</sup> Securities Exchange Act Release No. 74830 (April 29, 2015), 80 FR 25727 (May 5, 2015) (File No. SR-DTC-2015-003).

<sup>4</sup> Letter from Suzanne Shatto (May 3, 2015), available at <https://www.sec.gov/comments/sr-dtc-2015-003/dtc2015003.shtml>.

<sup>5</sup> 17 CFR 200.30-3(a)(12).

<sup>1</sup> 15 U.S.C. 78s(b)(1).

<sup>2</sup> 17 CFR 240.19b-4.

<sup>3</sup> 15 U.S.C. 78s(b)(3)(A)(iii).

<sup>4</sup> 17 CFR 240.19b-4(f)(6).

<sup>5</sup> Securities Exchange Act Release No. 72839 (August 13, 2014), 79 FR 49123 (August 19, 2014) (SR-CBOE-2014-040) (order approving Rules 6.53(y) and 15.2A).

<sup>6</sup> Rule 6.53(y) provides that an order is “tied to stock” if, at the time the Trading Permit Holder representing the order on the Exchange receives the order (if the order is a customer order) or initiates the order (if the order is a proprietary order), has knowledge that the order is coupled with an order(s) for the underlying stock or a security convertible into the underlying stock (“convertible



filing, which implementation date would be within 180 days of the date of filing. In accordance with that filing, the Exchange recently issued a regulatory circular on April 7, 2015, which announced a July 1, 2015 implementation date for the tied to stock marking and reporting requirements.<sup>9</sup> On May 20, 2015, CBOE submitted a rule filing to further delay the implementation of the reporting requirement set forth in Rule 15.2A in order to evaluate the format of the reports in light of its entry into a Regulatory Services Agreement with the Financial Industry Regulatory Authority, Inc. ("FINRA").<sup>10</sup> In that filing, CBOE announced its intention to proceed with the implementation of the marking requirement set forth in Rule 6.53(y) on July 1, 2015.

The Exchange believes it is appropriate to implement on a limited basis the marking requirement on July 1, 2015 with respect to orders sent to the Exchange for nonelectronic processing (*i.e.*, orders received and systematized by floor brokers handling orders on the CBOE trading floor), but proposes to delay the implementation of the marking requirement with respect to all other orders (*i.e.*, orders submitted to the Exchange for electronic processing). While the Exchange continues to believe that there has been sufficient notice, training and circulars provided to Trading Permit Holders on the marking requirement with respect to electronic orders, based on recent feedback from Trading Permit Holders regarding their development efforts related to the marking requirement, CBOE believes it is appropriate to provide Trading Permit Holders with additional time to complete their necessary systems development work to comply with this new marking requirement. However, since CBOE has completed development work to allow floor brokers to mark orders as tied to stock on devices approved by the Exchange that may be used on the trading floor for the systemization of orders represented in open outcry,<sup>11</sup> CBOE believes it is appropriate to move forward with implementing the tied to stock marking

requirement with respect to those orders.

CBOE delayed the implementation of Rule 15.2A for 12 to 18 months from the date of the filing that proposed that delay.<sup>12</sup> CBOE proposes to similarly delay implementation of the tied to stock marking requirement in Rule 6.53(y) with respect to orders submitted for electronic processing for 6 to 18 months from the date of this filing.<sup>13</sup> This will provide Trading Permit Holders with sufficient time to complete their systems development work to comply with the tied to stock marking requirement. During the delay, as part of CBOE's evaluation it is conducting in connection with the delay of the implementation of the reporting requirement, CBOE will evaluate the number of orders represented in open outcry that are marked as tied to stock, which will permit CBOE to evaluate the number of reports it can expect to receive with respect to those orders and the potential impact of the reports on CBOE's surveillances. The Exchange will issue a regulatory circular announcing the new implementation date for the reporting requirement as least 180 days prior to that date.

## 2. Statutory Basis

The Exchange believes the proposed rule change is consistent with the Act and the rules and regulations thereunder applicable to the Exchange and, in particular, the requirements of Section 6(b) of the Act.<sup>14</sup> Specifically, the Exchange believes the proposed rule change is consistent with the Section 6(b)(5)<sup>15</sup> requirements that the rules of an exchange be designed to prevent fraudulent and manipulative acts and practices, to promote just and equitable principles of trade, to foster cooperation and coordination with persons engaged in regulating, clearing, settling,

processing information with respect to, and facilitating transactions in securities, to remove impediments to and perfect the mechanism of a free and open market and a national market system, and, in general, to protect investors and the public interest. Additionally, the Exchange believes the proposed rule change is consistent with the Section 6(b)(5)<sup>16</sup> requirement that the rules of an exchange not be designed to permit unfair discrimination between customers, issuers, brokers, or dealers.

In particular, the Exchange believes the delayed implementation of Rule 6.53(y) with respect to orders submitted to the Exchange for electronic processing will provide Trading Permit Holders with sufficient time to perform systems development work that will allow them to comply with the marking requirement for those orders, which will prevent fraudulent and manipulative acts and practices and promote just and equitable principles of trade. Additionally, the proposed delay will provide the Exchange with sufficient time to evaluate the information obtained through the marking requirement with respect to orders submitted for nonelectronic processing, as part of its ongoing evaluation of the related reporting requirement format. The Exchange believes the ability to tie executed non-option legs to the applicable option legs that were separately submitted for execution will assist in the Exchange's efforts to prevent fraudulent and manipulative acts and practices with respect to tied to stock orders, but only if Trading Permit Holders are able to apply the marking in accordance with the rule.

## B. Self-Regulatory Organization's Statement on Burden on Competition

CBOE does not believe that the proposed rule change will impose any burden on competition that is not necessary or appropriate in furtherance of the purposes of the Act. The proposed change does not impose any burden on competition, as it is simply seeking to delay the implementation of the tied to stock marking requirement with respect to certain orders. The implementation on July 1, 2015 of the marking requirement with respect to orders sent to the Exchange for nonelectronic processing is consistent with previous rule filings and was announced to Trading Permit Holders in regulatory circulars.

<sup>9</sup> CBOE Regulatory Circular RG15-056 (April 7, 2015).

<sup>10</sup> Securities Exchange Act Release No. 34-75029 (May 21, 2015), 80 FR 30506 (May 28, 2015) (SR-CBOE-2015-051) (notice of immediate effectiveness of rule filing).

<sup>11</sup> Currently, the only Exchange-approved devices are the PULSe workstation, the Floor Broker Workstation ("FBW") and FBW 2, which CBOE makes available to floor brokers. Pursuant to Rule 6.53(y), Trading Permit Holders representing tied to stock orders on the Exchange must apply the marking at the time of systemization of the order.

<sup>12</sup> See *supra* note 10. In that filing, CBOE indicated that it planned to evaluate the format of the reports with FINRA to ensure that the information to be provided in the reports can be incorporated into surveillances in an efficient and effective manner. During the delay, CBOE intends to review the number of tied to stock orders for which information regarding the stock or convertible security leg is not available from CBOE's internal data (which will permit CBOE to evaluate the number of reports it can expect to receive and the potential impact of the reports on CBOE's surveillances) and determine whether this additional information is necessary in order to enhance its ability to effectively monitor and conduct surveillance of the CBOE markets with respect to tied to stock orders whose execution information is not electronically captured by the audit trail.

<sup>13</sup> The Exchange may still implement the reporting requirement and the marking requirement for electronic orders at separate times.

<sup>14</sup> 15 U.S.C. 78f(b).

<sup>15</sup> 15 U.S.C. 78f(b)(5).

<sup>16</sup> *Id.*

*C. Self-Regulatory Organization's Statement on Comments on the Proposed Rule Change Received from Members, Participants, or Others*

The Exchange neither solicited nor received comments on the proposed rule change.

**III. Date of Effectiveness of the Proposed Rule Change and Timing for Commission Action**

Because the foregoing proposed rule change does not: (i) significantly affect the protection of investors or the public interest; (ii) impose any significant burden on competition; and (iii) become operative for 30 days from the date on which it was filed, or such shorter time as the Commission may designate, it has become effective pursuant to Section 19(b)(3)(A)(ii) of the Act<sup>17</sup> and subparagraph (f)(6) of Rule 19b-4 thereunder.<sup>18</sup>

A proposed rule change filed under Rule 19b-4(f)(6)<sup>19</sup> normally does not become operative for 30 days after the date of filing. However, pursuant to Rule 19b-4(f)(6)(iii)<sup>20</sup> the Commission may designate a shorter time if such action is consistent with the protection of investors and the public interest. The Exchange requested that the Commission waive the 30-day operative delay. The Exchange noted this proposed rule change merely further delays implementation of a marking requirement with respect to certain orders. The Exchange also previously indicated it would implement the marking requirement by July 6, 2015, which date is less than 30 days from the date of the filing. According to the Exchange, Trading Permit Holders have provided feedback that they will not be in a position to comply the marking requirement for electronic orders by that date. The Exchange believes the Commission should waive the operative delay to ensure that the Exchange will not be required to implement the marking requirement with respect to those orders prior to Trading Permit Holders having compliant systems ready to apply the marking.

The Commission believes that waiving the 30-day operative delay is consistent with the protection of

investors and the public interest. Delaying the July 1, 2015 implementation date will allow more time for the Exchange and Trading Permit Holders to work together to ensure that Trading Permit Holder have compliant systems. For this reason, the Commission designates the proposed rule change to be operative on July 1, 2015.<sup>21</sup>

At any time within 60 days of the filing of the proposed rule change, the Commission summarily may temporarily suspend such rule change if it appears to the Commission that such action is necessary or appropriate in the public interest, for the protection of investors, or otherwise in furtherance of the purposes of the Act.

**IV. Solicitation of Comments**

Interested persons are invited to submit written data, views, and arguments concerning the foregoing, including whether the proposed rule change is consistent with the Act. Comments may be submitted by any of the following methods:

*Electronic Comments*

- Use the Commission's Internet comment form (<http://www.sec.gov/rules/sro.shtml>); or
- Send an email to [rule-comments@sec.gov](mailto:rule-comments@sec.gov). Please include File Number SR-CBOE-2015-067 on the subject line.

*Paper Comments*

- Send paper comments in triplicate to Secretary, Securities and Exchange Commission, 100 F Street, NE., Washington, DC 20549-1090.

All submissions should refer to File Number SR-CBOE-2015-067. This file number should be included on the subject line if email is used. To help the Commission process and review your comments more efficiently, please use only one method. The Commission will post all comments on the Commission's Internet Web site (<http://www.sec.gov/rules/sro.shtml>). Copies of the submission, all subsequent amendments, all written statements with respect to the proposed rule change that are filed with the Commission, and all written communications relating to the proposed rule change between the Commission and any person, other than those that may be withheld from the public in accordance with the provisions of 5 U.S.C. 552, will be available for Web site viewing and

printing in the Commission's Public Reference Room, 100 F Street, NE., Washington, DC 20549 on official business days between the hours of 10:00 a.m. and 3:00 p.m. Copies of the filing also will be available for inspection and copying at the principal office of the Exchange. All comments received will be posted without change; the Commission does not edit personal identifying information from submissions. You should submit only information that you wish to make available publicly. All submissions should refer to File Number SR-CBOE-2015-067 and should be submitted on or before August 3, 2015.

For the Commission, by the Division of Trading and Markets, pursuant to delegated authority.<sup>22</sup>

**Brent J. Fields,**  
*Secretary.*

[FR Doc. 2015-16980 Filed 7-10-15; 8:45 am]

BILLING CODE 8011-01-P

**DEPARTMENT OF STATE**

[Public Notice: 9186]

**Overseas Security Advisory Council (OSAC) Meeting Notice; Closed Meeting**

The Department of State announces a meeting of the U.S. State Department—Overseas Security Advisory Council on August 25–26, 2015. Pursuant to section 10(d) of the Federal Advisory Committee Act (5 U.S.C. Appendix), 5 U.S.C. 552b(c)(4), and 5 U.S.C. 552b(c)(7)(E), it has been determined that the meeting will be closed to the public. The meeting will focus on an examination of corporate security policies and procedures and will involve extensive discussion of trade secrets and proprietary commercial information that is privileged and confidential, and will discuss law enforcement investigative techniques and procedures. The agenda will include updated committee reports, a strategic planning session, and other matters relating to private sector security policies and protective programs and the protection of U.S. business information overseas.

For more information, contact Marsha Thurman, Overseas Security Advisory Council, U.S. Department of State, Washington, DC 20522-2008, phone: 571-345-2214.

<sup>22</sup> 17 CFR 200.30-3(a)(12).

<sup>17</sup> 15 U.S.C. 78s(b)(3)(A)(ii).

<sup>18</sup> 17 CFR 240.19b-4(f)(6). In addition, Rule 19b-4(f)(6) requires the Exchange to give the Commission written notice of the Exchange's intent to file the proposed rule change along with a brief description and text of the proposed rule change, at least five business days prior to the date of filing of the proposed rule change, or such shorter time as designated by the Commission. The Exchange has met this requirement.

<sup>19</sup> 17 CFR 240.19b-4(f)(6).

<sup>20</sup> 17 CFR 240.19b-4(f)(6)(iii).

<sup>21</sup> For purposes only of waiving the operative delay, the Commission has considered the proposed rule's impact on efficiency, competition, and capital formation. See 15 U.S.C. 78c(f).

Dated: June 30, 2015.

**Bill A. Miller,**

*Director of the Diplomatic, Security Service,  
U.S. Department of State.*

[FR Doc. 2015-17067 Filed 7-10-15; 8:45 am]

**BILLING CODE 4710-05-P**

## DEPARTMENT OF TRANSPORTATION

### Federal Aviation Administration

#### Notice of Public Workshops for the Draft Re-Evaluation of the O'Hare Modernization Environmental Impact Statement

**AGENCY:** Federal Aviation Administration, DOT.

**ACTION:** Notice of Public Workshops for the Draft Re-Evaluation of the O'Hare Modernization Environmental Impact Statement.

**SUMMARY:** The Federal Aviation Administration (FAA) announces its intent to host Public Workshops for the Draft Written Re-Evaluation of the O'Hare Modernization Environmental Impact Statement (Draft Re-Evaluation) for Chicago O'Hare International Airport, Chicago, Illinois.

The Draft Re-Evaluation will identify the potential environmental impacts associated with the construction schedule modification that alters the timing for commissioning new Runway 10R/28L, new Runway 9C/27C, and the extension of Runway 9R/27L at O'Hare International Airport pursuant to the National Environmental Policy Act.

The FAA will host Public Workshops on the Draft Re-Evaluation. The Public Workshops on the Draft Re-Evaluation will be held on the following dates: Monday, August 10, 2015, at White Eagle Banquets, 6839 North Milwaukee Avenue, Niles, Illinois 60714; Tuesday, August 11, 2015, at Taft High School, 6530 West Bryn Mawr Avenue, Chicago, Illinois 60631; Wednesday, August 12, 2015, at Monty's Elegant Banquets, 703 South York Road, Bensenville, Illinois 60106; Thursday, August 13, 2015, at Belvedere Events and Banquets, 1170 West Devon Avenue, Elk Grove Village, Illinois 60007. Each Public Workshop will start at 1 p.m. (Central Standard Time), and registration to participate in the Public Workshops will conclude by 9 p.m. (Central Standard Time). Representatives of FAA and its consultants will be available to provide information about the Draft Re-Evaluation. Spanish language translators will be available at the Public Workshops. If you need the assistance of a translator, other than Spanish, please

call Ms. Amy Hanson at (847) 294-7354 by August 3, 2015.

The Draft Re-Evaluation will be available for review on line at ([http://www.faa.gov/airports/airportdevelopment/omp/eis\\_re-eval/](http://www.faa.gov/airports/airportdevelopment/omp/eis_re-eval/)) and at libraries around O'Hare International Airport. The FAA will issue a separate notice at the time the Draft Re-Evaluation is available.

Issued in Des Plaines, IL, July 7, 2015.

**James G. Keefer,**

*Manager, Chicago Airports District Office.*

[FR Doc. 2015-17040 Filed 7-10-15; 8:45 am]

**BILLING CODE 4910-13-P**

## DEPARTMENT OF TRANSPORTATION

### Federal Aviation Administration

[Summary Notice No. 2015-43]

#### Petition for Exemption; Summary of Petition Received; Matthew Gerlitzki

**AGENCY:** Federal Aviation Administration (FAA), DOT.

**ACTION:** Notice.

**SUMMARY:** This notice contains a summary of a petition seeking relief from specified requirements of Title 14 of the Code of Federal Regulations. The purpose of this notice is to improve the public's awareness of, and participation in, the FAA's exemption process. Neither publication of this notice nor the inclusion or omission of information in the summary is intended to affect the legal status of the petition or its final disposition.

**DATES:** Comments on this petition must identify the petition docket number and must be received on or before August 3, 2015.

**ADDRESSES:** Send comments identified by docket number FAA-2015-0945 using any of the following methods:

- *Federal eRulemaking Portal:* Go to <http://www.regulations.gov> and follow the online instructions for sending your comments electronically.
- *Mail:* Send comments to Docket Operations, M-30; U.S. Department of Transportation (DOT), 1200 New Jersey Avenue SE., Room W12-140, West Building Ground Floor, Washington, DC 20590-0001.
- *Hand Delivery or Courier:* Take comments to Docket Operations in Room W12-140 of the West Building Ground Floor at 1200 New Jersey Avenue SE., Washington, DC, between 9 a.m. and 5 p.m., Monday through Friday, except Federal holidays.
- *Fax:* Fax comments to Docket Operations at 202-493-2251.

*Privacy:* In accordance with 5 U.S.C. 553(c), DOT solicits comments from the public to better inform its rulemaking process. DOT posts these comments, without edit, including any personal information the commenter provides, to <http://www.regulations.gov>, as described in the system of records notice (DOT/ALL-14 FDMS), which can be reviewed at <http://www.dot.gov/privacy>.

*Docket:* Background documents or comments received may be read at <http://www.regulations.gov> at any time. Follow the online instructions for accessing the docket or go to the Docket Operations in Room W12-140 of the West Building Ground Floor at 1200 New Jersey Avenue SE., Washington, DC, between 9 a.m. and 5 p.m., Monday through Friday, except Federal holidays.

#### FOR FURTHER INFORMATION CONTACT:

Keira Jones (202) 267-4024, Office of Rulemaking, Federal Aviation Administration, 800 Independence Avenue SW., Washington, DC 20591.

This notice is published pursuant to 14 CFR 11.85.

Issued in Washington, DC, on July 7, 2015.

**Lirio Liu,**

*Director, Office of Rulemaking.*

#### Petition for Exemption

*Docket No.:* FAA-2015-0945.

*Petitioner:* Matthew Gerlitzki.

*Section(s) of 14 CFR Affected:* § 121.436 (a)(3) and (c).

*Description of Relief Sought:* Mr. Matthew Gerlitzki seeks relief from § 121.436 (a)(3) and (c) to allow his military pilot in command flight time in rotary turbine-powered aircraft to be credited toward the 1000 hours of experience required by § 121.436 (a)(3). Section § 121.436 (c) states that a pilot may credit 500 hours of military flight time obtained as pilot in command of a multiengine turbine-powered, fixed wing airplane in an operation requiring more than one pilot.

[FR Doc. 2015-17006 Filed 7-10-15; 8:45 am]

**BILLING CODE 4910-13-P**

## DEPARTMENT OF TRANSPORTATION

### Federal Highway Administration

#### Notice of Final Federal Agency Actions on Proposed SR-126 (Memorial Boulevard) Improvement Project in Tennessee

**AGENCY:** Federal Highway Administration (FHWA), DOT.

**ACTION:** Notice of limitation on claims for Judicial Review of actions by FHWA and other Federal agencies.

**SUMMARY:** This notice announces actions taken by FHWA and other Federal agencies that are final within the meaning of 23 U.S.C. 139(l)(1). The actions relate to a proposed highway project, State Route (SR) 126 (Memorial Boulevard) Improvements, from East Center Street to Interstate 81 (I-81) in Sullivan County, Tennessee. Those actions grant licenses, permits, and approvals for the project.

**DATES:** By this notice, FHWA is advising the public of final agency actions subject to 23 U.S.C. 139(l)(1). A claim seeking judicial review of the Federal agency actions on the highway project will be barred unless the claim is filed on or before December 10, 2015. If the Federal law that authorizes judicial review of a claim provides a time period of less than 150 days for filing such claim, then that shorter time period still applies.

**FOR FURTHER INFORMATION CONTACT:** For FHWA: Ms. Theresa Claxton; Planning and Program Management Team Leader; Federal Highway Administration; Tennessee Division Office; 404 BNA Drive, Building 200, Suite 508; Nashville, Tennessee 37217; Telephone (615) 781-5770; email: [Theresa.Claxton@dot.gov](mailto:Theresa.Claxton@dot.gov). FHWA Tennessee Division Office's normal business hours are 7:30 a.m. to 4 p.m. (Central Time). You may also contact Mr. Jim Ozment, Environmental Division Director; Tennessee Department of Transportation (TDOT); James K. Polk Building, Suite 900; 505 Deaderick Street; Nashville, Tennessee 37243-0334; Telephone (615) 741-3655, [Jim.Ozment@tn.gov](mailto:Jim.Ozment@tn.gov). TDOT Environmental Division's normal business hours are 8 a.m. to 5 p.m. (Central Time).

**SUPPLEMENTARY INFORMATION:** Notice is hereby given that FHWA and other Federal agencies have taken final agency actions by issuing licenses, permits, and approvals for the following highway project in the State of Tennessee: SR 126 (Memorial Boulevard) Improvements, Project Number STP-126(10), Sullivan County, Tennessee. The proposed action will improve 8.4 miles of SR 126 (Memorial Boulevard), from East Center Street, within the City of Kingsport's city limits, east to I-81 in Sullivan County, Tennessee. The Selected Alternative (Alternative B Modified) proposes four travel lanes from East Center Street to Harbor Chapel Road, three travel lanes from Harbor Chapel Road to Old Stage Road, and two travel lanes from Old Stage Road to I-81. Portions of the corridor include (1) an additional eastbound travel lane to accommodate trucks ascending the

steep grade; (2) a continuous, left-turn lane; and (3) a compressed roadway cross-section width to minimize impacts to a National Register of Historic Places (NRHP) listed resource. The actions by the Federal agencies, and the laws under which such actions were taken, are described in the Final Environmental Impact Statement (FEIS) for the project, approved on November 19, 2014; in the FHWA Record of Decision (ROD) issued on April 8, 2015, and in other documents in the FHWA administrative record. The FEIS, ROD, and other documents in the FHWA administrative record file are available by contacting the FHWA or TDOT at the addresses provided above. The FHWA FEIS and ROD can be viewed and downloaded from the project Web site at <http://www.tdot.state.tn.us/sr126/>, or viewed at the TDOT—Environmental Division; James K. Polk Building, Suite 900; 505 Deaderick Street; Nashville, Tennessee 37243-0334.

This notice does not apply to the Tennessee Valley Authority (TVA), or the U.S. Army Corps of Engineering (USACE) permitting processes for this project, because no TVA or USACE permits have been issued for the project to date. This notice applies to all Federal agency decisions as of the issuance date of this notice and all laws under which such actions were taken, including but not limited to:

1. General: National Environmental Policy Act (NEPA) [42 U.S.C. 4321-4351]; Federal-Aid Highway Act [23 U.S.C. 109, 23 U.S.C. 128, and 23 U.S.C. 139].
2. Air: Clean Air Act [42 U.S.C. 7401-7671(q) and 23 U.S.C. 109(j)].
3. Land: Section 4(f) of the Department of Transportation Act of 1966 [23 U.S.C. 138 and 49 U.S.C. 303].
4. Wildlife: Endangered Species Act [16 U.S.C. 1531-1544 and Section 1536]; Fish and Wildlife Coordination Act [16 U.S.C. 661-667(d)]; Migratory Bird Treaty Act [16 U.S.C. 703-712].
5. Historic and Cultural Resources: Section 106 of the National Historic Preservation Act of 1966, as amended [16 U.S.C. 470(f) *et seq.*].
6. Social and Economic: Civil Rights Act of 1964 [42 U.S.C. 2000(d)-2000(d)(1)]; Uniform Relocation and Real Property Acquisition Policies Act of 1970 [42 U.S.C. 4601-4655]; Farmland Protection Policy Act (FPPA) [7 U.S.C. 4201-4209].
7. Wetlands and Water Resources: Clean Water Act (Section 404, Section 401, and Section 319) [33 U.S.C. 1251-1376].
8. Hazardous Materials: Comprehensive Environmental

Response, Compensation, and Liability Act (CERCLA) [42 U.S.C. 9601-9675].

9. Executive Orders: E.O. 11990 Protection of Wetlands; E.O. 11988 Floodplain Management; E.O. 13112 Invasive Species; E.O. 12898 Federal Actions to Address Environmental Justice in Minority Populations and Low Income Populations; E.O. 13175 Consultation and Coordination with Indian Tribal Governments; E.O. 13166 Improving Access to Services for Persons with Limited English Proficiency (LEP); E.O. 11514 Protection and Enhancement of Environmental Quality.

(Catalog of Federal Domestic Assistance Program Number 20.205, Highway Planning and Construction. The regulations implementing Executive Order 12372 regarding intergovernmental consultation on Federal programs and activities apply to this program.)

**Authority:** 23 U.S.C. 139(l)(1)

Issued on: July 6, 2015.

**Sabrina David,**

*Assistant Division Administrator, Nashville, Tennessee.*

[FR Doc. 2015-17028 Filed 7-10-15; 8:45 am]

**BILLING CODE 4910-RY-P**

## DEPARTMENT OF TRANSPORTATION

### Federal Motor Carrier Safety Administration

[Docket No. FMCSA-2015-0197]

### Hours of Service of Drivers: R&R Transportation Group; Application for Exemption

**AGENCY:** Federal Motor Carrier Safety Administration (FMCSA), DOT.

**ACTION:** Notice of application for exemption; request for comments.

**SUMMARY:** FMCSA announces that it has received an application from the R&R Transportation Group (R&R) for an exemption from the minimum 30-minute rest break requirement of the Agency's hours-of-service (HOS) regulations for commercial motor vehicle (CMV) drivers. The exemption would be available to R&R's drivers engaged in the transportation of materials that by their nature must be attended, such as radioactive materials, pharmaceuticals, and ammunition. The exemption would provide qualified drivers the same regulatory flexibility that the HOS regulations allow drivers transporting explosives, *i.e.* to use 30 minutes or more of attendance time to meet the HOS rest break requirements, provided they do not perform any other work during the break. FMCSA requests

public comment on R&R's application for exemption.

**DATES:** Comments must be received on or before August 12, 2015.

**ADDRESSES:** You may submit comments bearing the Federal Docket Management System (FDMS) Docket ID FMCSA–2015–0197 using any of the following methods:

- *Federal eRulemaking Portal:* Go to [www.regulations.gov](http://www.regulations.gov). Follow the on-line instructions for submitting comments.
- *Mail:* Docket Management Facility; U.S. Department of Transportation, 1200 New Jersey Avenue SE., West Building Ground Floor, Room W12–140, Washington, DC 20590–0001.
- *Hand Delivery or Courier:* West Building Ground Floor, Room W12–140, 1200 New Jersey Avenue SE., Washington, DC, between 9 a.m. and 5 p.m., ET, Monday through Friday, except Federal Holidays.
- *Fax:* 1–202–493–2251.

Each submission must include the Agency name and the docket number for this notice. Note that DOT posts all comments received without change to [www.regulations.gov](http://www.regulations.gov), including any personal information included in a comment. Please see the *Privacy Act* heading below.

**Docket:** For access to the docket to read background documents or comments, go to [www.regulations.gov](http://www.regulations.gov) at any time or visit Room W12–140 on the ground level of the West Building, 1200 New Jersey Avenue SE, Washington, DC, between 9 a.m. and 5 p.m., ET, Monday through Friday, except Federal holidays. The online FDMS is available 24 hours each day, 365 days each year. If you want acknowledgment that we received your comments, please include a self-addressed, stamped envelope or postcard or print the acknowledgment page that appears after submitting comments on-line.

**Privacy Act:** In accordance with 5 U.S.C. 553(c), DOT solicits comments from the public to better inform its rulemaking process. DOT posts these comments, without edit, including any personal information the commenter provides, to [www.regulations.gov](http://www.regulations.gov), as described in the system of records notice (DOT/ALL–14 FDMS), which can be reviewed at [www.dot.gov/privacy](http://www.dot.gov/privacy).

**FOR FURTHER INFORMATION CONTACT:** Mr. Robert Schultz, Driver and Carrier Operations Division; Office of Carrier, Driver and Vehicle Safety Standards, FMCSA; Telephone: 202–366–4325. Email: [MCPSD@dot.gov](mailto:MCPSD@dot.gov). If you have questions on viewing or submitting material to the docket, contact Docket Services, telephone (202) 366–9826.

**SUPPLEMENTARY INFORMATION:**

## Background

FMCSA has authority under 49 U.S.C. 31136(e) and 31315 to grant exemptions from certain parts of the Federal Motor Carrier Safety Regulations. FMCSA must publish a notice of each exemption request in the **Federal Register** (49 CFR 381.315(a)). The Agency must provide the public an opportunity to inspect the information relevant to the application, including any safety analyses that have been conducted. The Agency must also provide an opportunity for public comment on the request.

The Agency reviews safety analyses and public comments submitted, and determines whether granting the exemption would likely achieve a level of safety equivalent to, or greater than, the level that would be achieved by the current regulation (49 CFR 381.305). The decision of the Agency must be published in the **Federal Register** (49 CFR 381.315(b)) with the reasons for denying or granting the application and, if granted, the name of the person or class of persons receiving the exemption, and the regulatory provision from which the exemption is granted. The notice must also specify the effective period and explain the terms and conditions of the exemption. The exemption may be renewed (49 CFR 381.300(b)), but only after the public is provided the opportunity to comment on the renewal.

On December 27, 2011 (76 FR 81133), FMCSA published a final rule amending the HOS regulations (49 CFR part 395) for drivers of CMVs. The final rule included a new provision requiring certain drivers to take a rest break during their duty day. Specifically, the rule states that “driving is not permitted if more than 8 hours have passed since the end of the driver’s last off-duty or sleeper-berth period of at least 30 minutes” [49 CFR 395.3(a)(3)(ii)]. This provision took effect on July 1, 2013.

Under the HOS rules, a driver is on duty if he or she is “performing any other work in the capacity, employ, or service of a motor carrier” (§ 395.2). A driver is off duty when relieved of all duty and responsibility for the care and custody of the vehicle, its accessories, and any cargo it may be carrying. However, the Agency has recognized that under certain circumstances it is unsafe for CMVs to be left unattended so that the driver can take 30 minutes off duty. By regulation, FMCSA allows operators of CMVs transporting certain explosives to satisfy the rest-break requirement by using 30 minutes or more of attendance time providing they perform no other work during the break [49 CFR 395.1(q)]. Drivers employing

this provision are required to annotate their duty-status record to indicate that they have used the exception.

The Agency has granted requests for exemption from the 30-minute break requirement to drivers transporting security-sensitive radioactive materials (78 FR 32700, May 31, 2013) and weapons, munitions, and sensitive/classified cargo (80 FR 20556, April 16, 2015). FMCSA has extended § 49 CFR 395.1(q) to these drivers under certain terms and conditions.

## Request for Exemption

R&R operates three for-hire motor carriers that transport property in interstate commerce: R & R Trucking, Inc., USDOT 382936; TNI USA Inc. NC dba AATCO, USDOT 513601, and NEI Transport, LLC, USDOT 676270. R&R’s application for exemption states that the goods it transports are of such a nature or value that its drivers must keep the CMV under constant observation to prevent theft or an adverse security incident. The application provides examples of the goods transported by R&R CMVs: weapons, ammunition, night-vision goggles, pharmaceuticals, and radioactive material. R&R maintains constant attendance of such loads in order to protect the public from a major security or hazardous material event. R&R states that Federal contracts often require CMV drivers to maintain constant surveillance of the vehicle, and may require the driver of an escort CMV to maintain constant surveillance as well. In addition, R&R states that the U.S. Department of Homeland Security may require surveillance as part of a security alert posted in the National Terrorism Advisory System, and that some Federal agencies, in response to a threat, establish a security threat zone, or geo-fence, restricting or barring further movement of an R&R CMV.

R&R requests an exemption from the HOS regulation pertaining to rest breaks [49 CFR 395.3(a)(3)(ii)] to allow R&R drivers providing surveillance services to be treated the same as CMV drivers attending explosives under § 395.1(q). R&R believes that transportation under the requested exemption would achieve a level of safety and security that is at least equivalent to what would be obtained by following the normal break requirements in § 395.3(a)(3)(ii). R&R states that if the exemption were granted, it would restrict its drivers of such CMVs from performing any other on-duty functions while satisfying the 30-minute break requirement. R&R states that it will require its drivers to record their rest breaks as on-duty time in accordance with § 395.1(q), and to annotate such entries to indicate the

specific on-duty periods used to satisfy the rest-break requirement. R&R states that the Department of Defense provides documentation to CMV drivers to alert roadside inspectors of surveillance requirements.

R&R indicates that its three entities operate 255 power units and that 290 drivers would be covered by the exemption. The proposed exemption would be effective for 2 years, the maximum period allowed by § 381.300.

The processing of R&R's exemption request had been held in abeyance until it could be determined whether another exemption request [American Trucking Associations, Inc. (ATA), announced May 1, 2015 (80 FR 25004)] would make the R&R exemption unnecessary if approved. As requested, the ATA exemption was limited to transporters of certain hazardous materials and did not include some of the materials that R&R has requested to be covered by the exemption. Thus, R&R's request is now being considered independent of other requests.

#### Request for Comments

In accordance with 49 U.S.C. 31136(e) and 31315(b)(4), FMCSA requests public comment on R&R's application for an exemption from certain provisions of 49 CFR part 395. The Agency will consider all comments received by close of business on August 12, 2015. Comments will be available for examination in the docket at the location listed under the **ADDRESSES** section of this notice. The Agency will consider to the extent practicable comments received in the public docket after the closing date of the comment period.

Issued on: July 7, 2015.

Larry W. Minor,

Associate Administrator for Policy.

[FR Doc. 2015-17019 Filed 7-10-15; 8:45 am]

BILLING CODE 4910-EX-P

## DEPARTMENT OF TRANSPORTATION

### Federal Motor Carrier Safety Administration

[Docket No. FMCSA-2015-0053]

#### Qualification of Drivers; Exemption Applications; Vision

**AGENCY:** Federal Motor Carrier Safety Administration (FMCSA), DOT.

**ACTION:** Notice of applications for exemptions; request for comments.

**SUMMARY:** FMCSA announces receipt of applications from 27 individuals for exemption from the vision requirement in the Federal Motor Carrier Safety Regulations. They are unable to meet

the vision requirement in one eye for various reasons. The exemptions will enable these individuals to operate commercial motor vehicles (CMVs) in interstate commerce without meeting the prescribed vision requirement in one eye. If granted, the exemptions would enable these individuals to qualify as drivers of commercial motor vehicles (CMVs) in interstate commerce.

**DATES:** Comments must be received on or before August 12, 2015. All comments will be investigated by FMCSA. The exemptions will be issued the day after the comment period closes.

**ADDRESSES:** You may submit comments bearing the Federal Docket Management System (FDMS) Docket No. FMCSA-2015-0053 using any of the following methods:

- *Federal eRulemaking Portal:* Go to <http://www.regulations.gov>. Follow the on-line instructions for submitting comments.
- *Mail:* Docket Management Facility; U.S. Department of Transportation, 1200 New Jersey Avenue SE., West Building Ground Floor, Room W12-140, Washington, DC 20590-0001.
- *Hand Delivery:* West Building Ground Floor, Room W12-140, 1200 New Jersey Avenue SE., Washington, DC, between 9 a.m. and 5 p.m., Monday through Friday, except Federal Holidays.
- *Fax:* 1-202-493-2251.

*Instructions:* Each submission must include the Agency name and the docket numbers for this notice. Note that all comments received will be posted without change to <http://www.regulations.gov>, including any personal information provided. Please see the Privacy Act heading below for further information.

*Docket:* For access to the docket to read background documents or comments, go to <http://www.regulations.gov> at any time or Room W12-140 on the ground level of the West Building, 1200 New Jersey Avenue SE., Washington, DC, between 9 a.m. and 5 p.m., Monday through Friday, except Federal holidays. The FDMS is available 24 hours each day, 365 days each year. If you want acknowledgment that we received your comments, please include a self-addressed, stamped envelope or postcard or print the acknowledgement page that appears after submitting comments on-line.

*Privacy Act:* In accordance with 5 U.S.C. 553(c), DOT solicits comments from the public to better inform its rulemaking process. DOT posts these comments, without edit, including any personal information the commenter

provides, to [www.regulations.gov](http://www.regulations.gov), as described in the system of records notice (DOT/ALL-14 FDMS), which can be reviewed at [www.dot.gov/privacy](http://www.dot.gov/privacy).

**FOR FURTHER INFORMATION CONTACT:** Charles A. Horan, III, Director, Carrier, Driver and Vehicle Safety Standards, (202) 366-4001, [fmcsamedical@dot.gov](mailto:fmcsamedical@dot.gov), FMCSA, Department of Transportation, 1200 New Jersey Avenue SE., Room W64-224, Washington, DC 20590-0001. Office hours are from 8:30 a.m. to 5 p.m., Monday through Friday, except Federal holidays. If you have questions regarding viewing or submitting material to the docket, contact Docket Services, telephone (202) 366-9826.

#### SUPPLEMENTARY INFORMATION:

##### I. Background

Under 49 U.S.C. 31136(e) and 31315, FMCSA may grant an exemption from the Federal Motor Carrier Safety Regulations for a 2-year period if it finds "such exemption would likely achieve a level of safety that is equivalent to or greater than the level that would be achieved absent such exemption." FMCSA can renew exemptions at the end of each 2-year period. The 27 individuals listed in this notice have each requested such an exemption from the vision requirement in 49 CFR 391.41(b)(10), which applies to drivers of CMVs in interstate commerce. Accordingly, the Agency will evaluate the qualifications of each applicant to determine whether granting an exemption will achieve the required level of safety mandated by statute.

##### II. Qualifications of Applicants

###### Joel D. Barchard

Mr. Barchard, 48, has had esotropia with amblyopia in his right eye since birth. The visual acuity in his right eye is 20/150, and in his left eye, 20/20. Following an examination in 2015, his optometrist stated, "I believe that he has sufficient vision to perform the driving tasks required to operate a commercial vehicle at this time."

Mr. Barchard reported that he has driven tractor-trailer combinations for 13 years, accumulating 650,000 miles. He holds a Class A CDL from Massachusetts. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

###### Homer L. Butler

Mr. Butler, 65, has had strabismic amblyopia in his left eye since childhood. The visual acuity in his right eye is 20/20, and in his left eye, 20/400. Following an examination in 2014, his optometrist stated, "With his glasses,

his vision is sufficient to drive and to operate a commercial vehicle.” Mr. Butler reported that he has driven straight trucks for 40 years, accumulating 80,000 miles, tractor-trailer combinations for 49 years, accumulating 735,000 miles, and buses for 48 years, accumulating 48,000 miles. He holds a Class AM CDL from Pennsylvania. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*William D. Cherry*

Mr. Cherry, 51, has had amblyopia in his left eye since childhood. The visual acuity in his right eye is 20/20, and in his left eye, 20/200. Following an examination in 2015, his optometrist stated, “In my opinion, provided that Mr. Cherry wears proper spectacle correction, he has sufficient vision to perform the driving tasks required to operate commercial vehicles.” Mr. Cherry reported that he has driven straight trucks for nine years, accumulating 342,000 miles. He holds a Class B CDL from Massachusetts. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Thomas W. Chism*

Mr. Chism, 53, has aphakia and a torn iris in his right eye due to a traumatic incident in childhood. The visual acuity in his right eye is 20/70, and in his left eye, 20/20. Following an examination in 2014, his optometrist stated, “In my medical opinion, Thomas W. Chism has sufficient vision to perform the driving tasks required to operate a commercial vehicle.” Mr. Chism reported that he has driven straight trucks for 34 years, accumulating 51,000 miles, tractor-trailer combinations for 34 years, accumulating 17,000 miles, and buses for 10 years, accumulating 7,500 miles. He holds a Class A CDL from Kansas. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Pedro Del Bosque*

Mr. Del Bosque, 61, has been farsighted in his left eye since birth. The visual acuity in his right eye is 20/25, and in his left eye, 20/80. Following an examination in 2015, his optometrist stated, “In my opinion thee [sic] are no restrictions on his vision on either eye which would impair his ability to drive a commercial vehicle safely.” Mr. Del Bosque reported that he has driven tractor-trailer combinations for 35 years, accumulating 4.2 million miles. He holds a Class AM CDL from Texas. His driving record for the last 3 years shows

one crash, for which he was not cited and to which he did not contribute, and no convictions for moving violations in a CMV.

*Anthony C. DeNaples*

Mr. DeNaples, 34, has complete loss of vision in his right eye due to a traumatic incident in 2004. The visual acuity in his right eye is no light perception, and in his left eye, 20/20. Following an examination in 2015, his optometrist stated, “In my opinion, this field of vision and the visual acuity Anthony possess in the left eye would give him no reason not to be able to operate a commercial vehicle.” Mr. DeNaples reported that he has driven straight trucks for 17 years, accumulating 170,000 miles, and tractor-trailer combinations for 17 years, accumulating 170,000 miles. He holds a Class A CDL from Pennsylvania. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Michael R. Doerr*

Mr. Doerr, 33, has had keratoconus in his left eye since 2003. The visual acuity in his right eye is 20/20, and in his left eye, 20/50. Following an examination in 2015, his optometrist stated, “It is my medical opinion that Mr. Doerr has the vision sufficient to safely operate a commercial vehicle.” Mr. Doerr reported that he has driven straight trucks for 10 years, accumulating 200,000 miles. He holds a Class B CDL from Idaho. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Mark J. Dufresne*

Mr. Dufresne, 58, has complete loss of vision in his left eye due to a traumatic incident in 1982. The visual acuity in his right eye is 20/20, and in his left eye, no light perception. Following an examination in 2015, his optometrist stated, “In my opinion, he has sufficient vision in the right eye to perform the driving tasks to operate a commercial vehicle.” Mr. Dufresne reported that he has driven straight trucks for 29 years, accumulating 45,240 miles, and tractor-trailer combinations for five years, accumulating 500 miles. He holds a Class A MC CDL from New Hampshire. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Edward Dugue III*

Mr. Dugue, 49, has a prosthetic right eye since 2007 due to central retinal vein occlusion with resulting neovascular glaucoma. The visual acuity

in his right eye is no light perception, and in his left eye, 20/20. Following an examination in 2014, his optometrist stated, “Based on my evaluation, patient has sufficient vision to perform the driving tasks required to operate a commercial vehicle.” Mr. Dugue reported that he has driven straight trucks for 10 years, accumulating 265,000 miles. He holds a Class C CDL from North Carolina. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Adoum H. Fadoul*

Mr. Fadoul, 27, has complete loss of vision in his left eye due to a traumatic incident in 2006. The visual acuity in his right eye is 20/20, and in his left eye, no light perception. Following an examination in 2015, his ophthalmologist stated, “Based on vision in right eye, ability to drive commercial vehicle should be good.”

Mr. Fadoul reported that he has driven straight trucks for three years, accumulating 75,000 miles. He holds a chauffeur’s license from Indiana. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Larry R. Hayes, Jr.*

Mr. Hayes, 44, has no light perception in his left eye due to a traumatic incident in childhood. The visual acuity in his right eye is 20/20, and in his left eye, no light perception. Following an examination in 2014, his optometrist stated, “I believe Larry has sufficient vision to safely drive commercial vehicles.” Mr. Hayes reported that he has driven tractor-trailer combinations for 26 years, accumulating 2.6 million miles. He holds a Class A CDL from Kansas. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Bradley A. Hetrick*

Mr. Hetrick, 57, has had amblyopia in his left eye since birth. The visual acuity in his right eye is 20/20, and in his left eye, 20/400. Following an examination in 2014, his optometrist stated, “Bradley Hetrick has a history of having a CDL license [sic] for over 20 years. Visual acuity corrected is 20/20 OD and J20/400 OS. Color vision with Ishihara 14 plates out of 14. 120 degree visual field testing shows no defects on the horizontal meridian . . . I believe he should be granted a vision waiver [sic].”

Mr. Hetrick reported that he has driven straight trucks for 17 years, accumulating 340,000 miles. He holds a Class AM CDL from Pennsylvania. His



driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Wayne E. Jakob*

Mr. Jakob, 56, has had exudative retinopathy in his right eye since 2011 due to Coats' disease. The visual acuity in his right eye is hand motion, and in his left eye, 20/20. Following an examination in 2015, his optometrist stated, "It is my medical opinion that Mr. Wayne E. Jakob has sufficient vision to perform the driving tasks required to operate a commercial vehicle." Mr. Jakob reported that he has driven tractor-trailer combinations for 25 years, accumulating 687,500 miles. He holds a Class A CDL from Illinois. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Michael A. Kimbler*

Mr. Kimbler, 59, has had central vein occlusion in his right eye since 2009. The visual acuity in his right eye is hand motion, and in his left eye, 20/20. Following an examination in 2015, his optometrist stated, "In my medical opinion,

Michael Kimbler has sufficient vision to perform the driving tasks required to operate a commercial vehicle." Mr. Kimbler reported that he has driven straight trucks for 29 years, accumulating 1.11 million miles. He holds a Class C CDL from Texas. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Colon W. King*

Mr. King, 47, has had a corneal scar in his right eye since childhood. The visual acuity in his right eye is 20/100, and in his left eye, 20/20. Following an examination in 2014, his optometrist stated, "Therefore, it is my medical opinion that Mr. King has sufficient vision to perform the driving tasks required to operate a commercial vehicle." Mr. King reported that he has driven straight trucks for 12 years, accumulating 576,000 miles, tractor-trailer combinations for 10 years, accumulating 1.14 million miles. He holds a Class A CDL from Maine. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Earney J. Knox*

Mr. Knox, 48, has complete loss of vision in his right eye due to a traumatic incident in 1995. The visual acuity in his right eye is no light perception, and in his left eye, 20/20. Following an examination in 2015, his optometrist

stated, "In my opinion, Mr. Knox has exhibited the ability to drive accident free since 1995. His left eye vision is stable without disease process. I see no limitations for Mr. Knox to drive safely in a CMV." Mr. Knox reported that he has driven straight trucks for seven years, accumulating 140,000 miles, and tractor-trailer combinations for seven years, accumulating 70,000 miles. He holds a Class A CDL from Missouri. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*James R. Leoffler, Jr.*

Mr. Leoffler, 67, has had amblyopia in his left eye since childhood. The visual acuity in his right eye is 20/30, and in his left eye, 20/200. Following an examination in 2015, his ophthalmologist stated, "The patient apparently does not qualify for a commercial driver's license because of his longstanding amblyopia on the left, but I feel he should be considered for an exemption since he has a longstanding history of driving commercial vehicles without any problems." Mr. Leoffler reported that he has driven straight trucks for 50 years, accumulating four million miles, and tractor-trailer combinations for 20 years, accumulating 20,000 miles. He holds a Class A CDL from Colorado. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Jimmy D. Mannis*

Mr. Mannis, 49, has had amblyopia in his left eye since birth. The visual acuity in his right eye is 20/20, and in his left eye, 20/200. Following an examination in 2015, his optometrist stated, "It is my opinion especially since Mr. Mannis has proven this in the past, he has sufficient vision to operate a commercial vehicle." Mr. Mannis reported that he has driven straight trucks for 11 years, accumulating 1,100 miles, and tractor-trailer combinations for 11 years, accumulating 11,000 miles. He holds a Class A CDL from Arkansas. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*George A. McCue*

Mr. McCue, 64, has had a prosthetic right eye since childhood due to a benign tumor. The visual acuity in his right eye is no light perception, and in his left eye, 20/20. Following an examination in 2015, his optometrist stated, "In my opinion the patient meets all the vision guidelines set forth by the DMV to operate a commercial vehicle." Mr. McCue reported that he has driven

straight trucks for 20 years, accumulating 5.2 million miles. He holds an operator's license from Nevada. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Kevin D. Mendoza*

Mr. Mendoza, 58, has complete loss of vision in his left eye due to a traumatic incident in childhood. The visual acuity in his right eye is 20/20, and in his left eye, no light perception. Following an examination in 2015, his optometrist stated, "Visual perception stable and excellent and new specs mainly for near tasks only and no reason to believe affects CDL driving." Mr. Mendoza reported that he has driven straight trucks for 36 years, accumulating 630,000 miles. He holds a Class A CDL from Washington. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*James Smentkowski*

Mr. Smentkowski, 42, has phthisis bulbi secondary to trauma in his right eye due to a traumatic incident in 1995. The visual acuity in his right eye is no light perception, and in his left eye, 20/15. Following an examination in 2015, his optometrist stated, "His left eye has 20/15 vision with out [sic] the need for correction at distance and has demonstrated no restrictions on his commercial vehicle driving ability."

Mr. Smentkowski reported that he has driven straight trucks for 24 years, accumulating 840,000 miles, and tractor-trailer combinations for 24 years, accumulating 1.2 million miles. He holds a Class A CDL from New Jersey. His driving record for the last 3 years shows one crash, for which he was not cited and to which he did not contribute, and no convictions for moving violations in a CMV.

*Neil G. Sturges*

Mr. Sturges, 67, has optic nerve damage in his right eye due to a traumatic incident in 1970. The visual acuity in his right eye is light perception, and in his left eye, 20/20. Following an examination in 2015, his optometrist stated,

"Dr. Craig P. Hartnagel, O.D. P.C. fully certifies that Mr. Sturges has sufficient vision in his left eye to perform his duties as an operator of commercial vehicles." Mr. Sturges reported that he has driven straight trucks for 32 years, accumulating 720,000 miles. He holds an operator's license from New York. His driving record for the last 3 years

shows no crashes and no convictions for moving violations in a CMV.

*Travis L. Watson*

Mr. Watson, 68, has had refractive amblyopia in his right eye since childhood. The visual acuity in his right eye is 20/70, and in his left eye, 20/20. Following an examination in 2015, his optometrist stated, "Mr. Watson has sufficient vision to perform the driving tasks to operate a commercial vehicle." Mr. Watson reported that he has driven straight trucks for 45 years, accumulating 675,000 miles, and tractor-trailer combinations for 40 years, accumulating 600,000 miles. He holds a Class A CDL from Tennessee. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Bruce W. Williams*

Mr. Williams, 49, has had amblyopia and a retinal detachment in his right eye since childhood. The visual acuity in his right eye is 20/200, and in his left eye, 20/20. Following an examination in 2015, his ophthalmologist stated, "Also in my opinion, he does have sufficient vision to perform the driving tasks required to operate a commercial vehicle." Mr. Williams reported that he has driven tractor-trailer combinations for 20 years, accumulating 200,000 miles. He holds a Class AM CDL from Illinois. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Norman G. Wooten*

Mr. Wooten, 51, has had complete loss of vision in his right eye since 2007 due to cancer. The visual acuity in his right eye is no light perception, and in his left eye, 20/25. Following an examination in 2015, his optometrist stated, "There is no reason Mr. Wooten should not be able to perform any visual tasks to include operation of commercial vehicles." Mr. Wooten reported that he has driven straight trucks for seven years, accumulating 665,000 miles, and tractor-trailer combinations for 18 years, accumulating 1.97 million miles. He holds a Class A CDL from Texas. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

*Kurt A. Yoder*

Mr. Yoder, 40, has had amblyopia in his right eye since childhood. The visual acuity in his right eye is 20/100, and in his left eye, 20/20. Following an examination in 2015, his optometrist stated, "Mr. Yoder should have no

problems with continuing with his CDL at this time. They amblyopia is longstanding and he has adjusted to it extremely well." Mr. Yoder reported that he has driven straight trucks for 13 years, accumulating 494,000 miles, and tractor-trailer combinations for two years, accumulating 156,000 miles. He holds a Class A CDL from Ohio. His driving record for the last 3 years shows no crashes and no convictions for moving violations in a CMV.

### III. Public Participation and Request for Comments

FMCSA encourages you to participate by submitting comments and related materials.

#### *Submitting Comments*

If you submit a comment, please include the docket number for this notice, indicate the specific section of this document to which each comment applies, and provide a reason for each suggestion or recommendation. You may submit your comments and material online or by fax, mail, or hand delivery, but please use only one of these means. FMCSA recommends that you include your name and a mailing address, an email address, or a phone number in the body of your document so the Agency can contact you if it has questions regarding your submission.

To submit your comment online, go to <http://www.regulations.gov> and put the docket number FMCSA-2015-0053 in the "Keyword" box, and click "Search." When the new screen appears, click on "Comment Now!" button and type your comment into the text box in the following screen. Choose whether you are submitting your comment as an individual or on behalf of a third party and then submit. If you submit your comments by mail or hand delivery, submit them in an unbound format, no larger than 8½ by 11 inches, suitable for copying and electronic filing. If you submit comments by mail and would like to know that they reached the facility, please enclose a stamped, self-addressed postcard or envelope.

FMCSA will consider all comments and material received during the comment period and may change this notice based on your comments.

#### *Viewing Comments and Documents*

To view comments, as well as documents mentioned in this preamble as being available in the docket, go to <http://www.regulations.gov> and insert the docket number FMCSA-2015-0053 in the "Keyword" box and click "Search." Next, click "Open Docket Folder" button and choose the document listed to review. If you do not

have access to the Internet, you may view the docket online by visiting the Docket Management Facility in Room W12-140 on the ground floor of the DOT West Building, 1200 New Jersey Avenue SE., Washington, DC 20590, between 9 a.m. and 5 p.m., e.t., Monday through Friday, except Federal holidays.

Issued on: June 24, 2015.

**Larry W. Minor,**

*Associate Administrator for Policy.*

[FR Doc. 2015-17021 Filed 7-10-15; 8:45 am]

BILLING CODE 4910-EX-P

## DEPARTMENT OF TRANSPORTATION

### Federal Motor Carrier Safety Administration

[Docket No. FMCSA-2014-0385]

#### Qualification of Drivers; Application for Exemptions; Hearing

**AGENCY:** Federal Motor Carrier Safety Administration (FMCSA), DOT.

**ACTION:** Notice of applications for exemptions; request for comments.

**SUMMARY:** FMCSA announces that 15 individuals have applied for a medical exemption from the hearing requirement in the Federal Motor Carrier Safety Regulations (FMCSRs). In accordance with the statutory requirements concerning applications for exemptions, FMCSA requests public comments on these requests. The statute and implementing regulations concerning exemptions require that exemptions must provide an equivalent or greater level of safety than if they were not granted. If the Agency determines the exemptions would satisfy the statutory requirements and decides to grant these requests after reviewing the public comments submitted in response to this notice, the exemptions would enable these 15 individuals to operate CMVs in interstate commerce.

**DATES:** Comments must be received on or before August 12, 2015.

**ADDRESSES:** You may submit comments bearing the Federal Docket Management System (FDMS) Docket No. FMCSA-2014-0385 using any of the following methods:

- **Federal eRulemaking Portal:** Go to [www.regulations.gov](http://www.regulations.gov). Follow the on-line instructions for submitting comments.
- **Mail:** Docket Management Facility; U.S. Department of Transportation, 1200 New Jersey Avenue SE., West Building Ground Floor, Room W12-140, Washington, DC 20590-0001.
- **Hand Delivery or Courier:** West Building Ground Floor, Room W12-140, 1200 New Jersey Avenue SE.,

Washington, DC, between 9 a.m. and 5 p.m., ET, Monday through Friday, except Federal Holidays.

- Fax: 1-202-493-2251.

Each submission must include the Agency name and the docket numbers for this notice. Note that all comments received will be posted without change to [www.regulations.gov](http://www.regulations.gov), including any personal information provided. Please see the Privacy Act heading below for further information.

**Docket:** For access to the docket to read background documents or comments, go to [www.regulations.gov](http://www.regulations.gov) at any time or Room W12-140 on the ground level of the West Building, 1200 New Jersey Avenue SE, Washington, DC, between 9 a.m. and 5 p.m., ET, Monday through Friday, except Federal holidays. The FDMS is available 24 hours each day, 365 days each year. If you want acknowledgment that we received your comments, please include a self-addressed, stamped envelope or postcard or print the acknowledgement page that appears after submitting comments on-line.

**Privacy Act:** In accordance with 5 U.S.C. 553(c), DOT solicits comments from the public to better inform its rulemaking process. DOT posts these comments, without edit, including any personal information the commenter provides, to [www.regulations.gov](http://www.regulations.gov), as described in the system records notice (DOT/ALL-14 FDMS), which can be reviewed at [www.dot.gov/privacy](http://www.dot.gov/privacy).

#### FOR FURTHER INFORMATION CONTACT:

Charles A. Horan, III, Director, Office of Carrier, Driver and Vehicle Safety, (202) 366-4001, [fmcsamedical@dot.gov](mailto:fmcsamedical@dot.gov), FMCSA, Department of Transportation, 1200 New Jersey Avenue, SE., Room W64-224, Washington, DC 20590-0001. Office hours are from 8:30 a.m. to 5 p.m., Monday through Friday, except Federal holidays.

#### SUPPLEMENTARY INFORMATION:

##### Background

The Federal Motor Carrier Safety Administration has authority to grant exemptions from many of the Federal Motor Carrier Safety Regulations (FMCSRs) under 49 U.S.C. 31315 and 31136(e), as amended by Section 4007 of the Transportation Equity Act for the 21st Century (TEA- 21) (Pub. L. 105-178, June 9, 1998, 112 Stat. 107, 401). FMCSA has published in 49 CFR part 381, subpart C final rules implementing the statutory changes in its exemption procedures made by section 4007, 69 FR 51589 (August 20, 2004).<sup>1</sup> Under the

rules in part 381, subpart C, FMCSA must publish a notice of each exemption request in the **Federal Register**. The Agency must provide the public with an opportunity to inspect the information relevant to the application, including any safety analyses that have been conducted and any research reports, technical papers and other publications referenced in the application. The Agency must also provide an opportunity to submit public comment on the applications for exemption.

The Agency reviews the safety analyses and the public comments and determines whether granting the exemption would likely achieve a level of safety equivalent to or greater than the level that would be achieved without the exemption. The decision of the Agency must be published in the **Federal Register**. If the Agency denies the request, it must state the reason for doing so. If the decision is to grant the exemption, the notice must specify the person or class of persons receiving the exemption and the regulatory provision or provisions from which an exemption is granted. The notice must also specify the effective period of the exemption (up to 2 years) and explain the terms and conditions of the exemption. The exemption may be renewed.

The current provisions of the FMCSRs concerning hearing state that a person is physically qualified to drive a CMV if that person

First perceives a forced whispered voice in the better ear at not less than 5 feet with or without the use of a hearing aid or, if tested by use of an audiometric device, does not have an average hearing loss in the better ear greater than 40 decibels at 500 Hz, 1,000 Hz, and 2,000 Hz with or without a hearing aid when the audiometric device is calibrated to American National Standard (formerly ASA Standard) Z24.5—1951.

49 CFR 391.41(b)(11). This standard was adopted in 1970, with a revision in 1971 to allow drivers to be qualified under this standard while wearing a hearing aid, 35 FR 6458, 6463 (April 22, 1970) and 36 FR 12857 (July 3, 1971).

FMCSA also issues instructions for completing the medical examination report and includes advisory criteria on the report itself to provide guidance for medical examiners in applying the hearing standard. See 49 CFR 391.43(f). The current advisory criteria for the hearing standard include a reference to a report entitled "Hearing Disorders and Commercial Motor Vehicle Drivers" prepared for the Federal Highway

(63 FR 67600 (Dec. 8, 2008)), and adopted by FMCSA in 2001 [66 FR 49867 (Oct. 1, 2001)].

Administration, FMCSA's predecessor, in 1993.<sup>2</sup>

#### FMCSA Requests Comments on the Exemption Applications

FMCSA requests comments from all interested parties on whether a driver who cannot meet the hearing standard should be permitted to operate a CMV in interstate commerce. Further, the Agency asks for comments on whether a driver who cannot meet the hearing standard should be limited to operating only certain types of vehicles in interstate commerce, for example, vehicles without air brakes. The statute and implementing regulations concerning exemptions require that the Agency request public comments on all applications for exemptions. The Agency is also required to make a determination that an exemption would likely achieve a level of safety that is equivalent to, or greater than, the level that would be *achieved absent such exemption before granting any such requests*.

#### Submitting Comments

You may submit your comments and material online or by fax, mail, or hand delivery, but please use only one of these means. FMCSA recommends that you include your name and a mailing address, an email address, or a phone number in the body of your document so that FMCSA can contact you if there are questions regarding your submission.

To submit your comment online, go to [www.regulations.gov](http://www.regulations.gov) and in the search box insert the docket number "FMCSA-2014-0385" and click the search button. When the new screen appears, click on the blue "Comment Now!" button on the right hand side of the page. On the new page, enter information required including the specific section of this document to which each comment applies, and provide a reason for each suggestion or recommendation. If you submit your comments by mail or hand delivery, submit them in an unbound format, no larger than 8½ by 11 inches, suitable for copying and electronic filing. If you submit comments by mail and would like to know that they reached the facility, please enclose a stamped, self-addressed postcard or envelope.

We will consider all comments and material received during the comment period and may change this proposed rule based on your comments. FMCSA

<sup>1</sup> This action adopted as final rules the interim final rules issued by FMCSA's predecessor in 1998

<sup>2</sup> This report is available on the FMCSA Web site at [http://www.fmcsa.dot.gov/facts-research/research-technology/publications/medreport\\_archives.htm](http://www.fmcsa.dot.gov/facts-research/research-technology/publications/medreport_archives.htm).

may issue a final rule at any time after the close of the comment period.

### Viewing Comments and Documents

To view comments, go to [www.regulations.gov](http://www.regulations.gov) and in the search box insert the docket number “FMCSA–2014–0385” and click “Search.” Next, click “Open Docket Folder” and you will find all documents and comments related to the proposed rulemaking.

### Information on Individual Applicants

#### Dean J. Bobis

Mr. Bobis, 38, holds an operator’s license in Arizona.

#### Keith A. Byrd

Mr. Byrd, 52, holds an operator’s license in New Jersey.

#### Jeffrey D. Cottom

Mr. Cottom, 24, holds a class A CDL in Ohio.

#### Harold Richard Deavers

Mr. Deavers, 56, holds a class B CDL in West Virginia.

#### Charles James Heikkinen

Mr. Heikkinen, 34, holds a Chauffeur’s license Michigan.

#### Emil Atanassov Iontchev

Mr. Iontchev, 34, holds an operator’s license in Illinois.

#### Amy Marie Ivins

Ms. Ivins, 37, holds an operator’s license in Nebraska.

#### William Kevin Jones

Mr. Jones, 67, holds an operator’s license in Minnesota.

#### Anthony Michael Maginity

Mr. Maginity, 24, holds an operator’s license in Iowa.

#### Jerrell M. McCrary

Mr. McCrary, 50, holds an operator’s license in North Carolina.

#### Frank P. Oakley, II

Mr. Oakley, 46, holds an operator’s license in Georgia.

#### David Antrez Presley

Mr. Presley, 34, holds an operator’s license in Georgia.

#### Patricia L. Stephens

Ms. Stephens, 44, holds an operator’s license in Nebraska.

#### Jason D. Swearington

Mr. Swearington, 28, holds an operator’s license in Texas.

#### Roderick B. Thomas

Mr. Thomas, 50, holds a class A CDL in Georgia.

### Request for Comments

In accordance with 49 U.S.C. 31136(e) and 31315(b)(4), FMCSA requests public comment from all interested persons on the exemption petitions described in this notice. The Agency will consider all comments received before the close of business August 12, 2015. Comments will be available for examination in the docket at the location listed under the **ADDRESSES** section of this notice. The Agency will file comments received after the comment closing date in the public docket, and will consider them to the extent practicable. In addition to late comments, FMCSA will also continue to file, in the public docket, relevant information that becomes available after the comment closing date. Interested persons should monitor the public docket for new material.

Issued on: July 1, 2015.

#### Larry W. Minor,

Associate Administrator for Policy.

[FR Doc. 2015–17024 Filed 7–10–15; 8:45 am]

**BILLING CODE 4910-EX-P**

## DEPARTMENT OF TRANSPORTATION

### Federal Motor Carrier Safety Administration

[Docket No. FMCSA–2015–0116]

### Qualification of Drivers; Exemption Applications; Epilepsy and Seizure Disorders

**AGENCY:** Federal Motor Carrier Safety Administration (FMCSA), DOT.

**ACTION:** Notice of applications for exemptions; request for comments.

**SUMMARY:** FMCSA announces receipt of applications from 21 individuals for an exemption from the prohibition against persons with a clinical diagnosis of epilepsy or any other condition that is likely to cause a loss of consciousness or any loss of ability to operate a commercial motor vehicle (CMV) in interstate commerce. The regulation and the associated advisory criteria published in the Code of Federal Regulations as the “Instructions for Performing and Recording Physical Examinations” have resulted in numerous drivers being prohibited from operating CMVs in interstate commerce based on the fact that they have had one or more seizures and are taking anti-seizure medication, rather than an individual analysis of their circumstances by a qualified medical

examiner. If granted, the exemptions would enable these individuals who have had one or more seizures and are taking anti-seizure medication to operate CMVs for up to 2 years in interstate commerce.

**DATES:** Comments must be received on or before August 12, 2015.

**ADDRESSES:** You may submit comments bearing the Federal Docket Management System (FDMS) Docket ID FMCSA–2015–0116 using any of the following methods:

- *Federal eRulemaking Portal:* Go to [www.regulations.gov](http://www.regulations.gov). Follow the on-line instructions for submitting comments.

- *Mail:* Docket Management Facility; U.S. Department of Transportation, 1200 New Jersey Avenue SE., West Building Ground Floor, Room W12–140, Washington, DC 20590–0001.

- *Hand Delivery or Courier:* West Building Ground Floor, Room W12–140, 1200 New Jersey Avenue SE., Washington, DC, between 9 a.m. and 5 p.m., Monday through Friday, except Federal Holidays.

- *Fax:* 1–202–493–2251.

Each submission must include the Agency name and the docket ID for this Notice. Note that DOT posts all comments received without change to [www.regulations.gov](http://www.regulations.gov), including any personal information included in a comment. Please see the Privacy Act heading below.

*Docket:* For access to the docket to read background documents or comments, go to [www.regulations.gov](http://www.regulations.gov), at any time or Room W12–140 on the ground level of the West Building, 1200 New Jersey Avenue SE., Washington, DC, between 9 a.m. and 5 p.m., Monday through Friday, except Federal holidays. The FDMS is available 24 hours each day, 365 days each year. If you want acknowledgment that we received your comments, please include a self-addressed, stamped envelope or postcard or print the acknowledgement page that appears after submitting comments on-line.

*Privacy Act:* In accordance with 5 U.S.C. 553(c), DOT solicits comments from the public to better inform its rulemaking process. DOT posts these comments, without edit, including any personal information the commenter provides, to [www.regulations.gov](http://www.regulations.gov), as described in the system records notice (DOT/ALL–14 FDMS), which can be reviewed at [www.dot.gov/privacy](http://www.dot.gov/privacy).

**FOR FURTHER INFORMATION CONTACT:** Charles A. Horan, III, Director, Office of Carrier, Driver and Vehicle Safety, (202) 366–4001, or via email at [fmcsamedical@dot.gov](mailto:fmcsamedical@dot.gov), or by letter to FMCSA, Room W64–113, Department of

Transportation, 1200 New Jersey Avenue SE., Washington, DC 20590–0001. Office hours are from 8:30 a.m. to 5 p.m., Monday through Friday, except Federal holidays.

#### **SUPPLEMENTARY INFORMATION:**

##### **Background**

Under 49 U.S.C. 31315 and 31136(e), FMCSA may grant an exemption for up to a 2-year period if it finds “such exemption would likely achieve a level of safety that is equivalent to or greater than the level that would be achieved absent such exemption.” The statutes allow the Agency to renew exemptions at the end of the 2-year period. The 21 individuals listed in this notice have requested an exemption from the epilepsy prohibition in 49 CFR 391.41(b)(8), which applies to drivers who operate CMVs as defined in 49 CFR 390.5, in interstate commerce. Section 391.41(b)(8) states that a person is physically qualified to drive a CMV if that person has no established medical history or clinical diagnosis of epilepsy or any other condition which is likely to cause the loss of consciousness or any loss of ability to control a CMV.

FMCSA provides medical advisory criteria for use by medical examiners in determining whether drivers with certain medical conditions should be certified to operate CMVs in interstate commerce. The advisory criteria indicate that if an individual has had a sudden episode of a non-epileptic seizure or loss of consciousness of unknown cause that did not require anti-seizure medication, the decision whether that person’s condition is likely to cause the loss of consciousness or loss of ability to control a CMV should be made on an individual basis by the medical examiner in consultation with the treating physician. Before certification is considered, it is suggested that a 6-month waiting period elapse from the time of the episode. Following the waiting period, it is suggested that the individual have a complete neurological examination. If the results of the examination are negative and anti-seizure medication is not required, then the driver may be qualified.

In those individual cases where a driver had a seizure or an episode of loss of consciousness that resulted from a known medical condition (e.g., drug reaction, high temperature, acute infectious disease, dehydration, or acute metabolic disturbance), certification should be deferred until the driver has recovered fully from that condition, has no existing residual complications, and is not taking anti-seizure medication.

Drivers who have a history of epilepsy/seizures, off anti-seizure medication and seizure-free for 10 years, may be qualified to operate a CMV in interstate commerce. Interstate drivers with a history of a single unprovoked seizure may be qualified to drive a CMV in interstate commerce if seizure-free and off anti-seizure medication for a 5-year period or more.

##### **Submitting Comments**

You may submit your comments and material online or by fax, mail, or hand delivery, but please use only one of these means. FMCSA recommends that you include your name and a mailing address, an email address, or a phone number in the body of your document so that FMCSA can contact you if there are questions regarding your submission. To submit your comment online, go to <http://www.regulations.gov> and in the search box insert the docket number “FMCSA–2015–0116” and click the search button. When the new screen appears, click on the blue “Comment Now!” button on the right hand side of the page. On the new page, enter information required including the specific section of this document to which each comment applies, and provide a reason for each suggestion or recommendation. If you submit your comments by mail or hand delivery, submit them in an unbound format, no larger than 8½ by 11 inches, suitable for copying and electronic filing. If you submit comments by mail and would like to know that they reached the facility, please enclose a stamped, self-addressed postcard or envelope.

We will consider all comments and material received during the comment period and may change this proposed rule based on your comments. FMCSA may issue a final rule at any time after the close of the comment period.

##### **Viewing Comments and Documents**

To view comments, as well as any documents mentioned in this preamble, To submit your comment online, go to <http://www.regulations.gov> and in the search box insert the docket number “FMCSA–2015–0116” and click “Search.” Next, click “Open Docket Folder” and you will find all documents and comments related to the proposed rulemaking.

##### **Summary of Applications**

###### *William Howard Brown*

Mr. Brown is a 58 year-old class A CDL holder in North Carolina. He has a history of epilepsy and has remained seizure free since 1999. He takes anti-seizure medication with the dosage and

frequency remaining the same since that time. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Brown receiving an exemption.

###### *Leo Arnold Burns*

Mr. Burns is a 59 year-old driver in Nevada. He has a history of a seizure disorder and has remained seizure free since 2010. He takes anti-seizure medication with the dosage and frequency remaining the same since March 2015. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Burns receiving an exemption.

###### *Daniel Dellaserra*

Mr. Dellaserra is a 54 year-old class A CDL holder in California. He has a history of seizures and has remained seizure free since 1998. He takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Dellaserra receiving an exemption.

###### *Rodney Lee Ericson*

Mr. Ericson is a 51 year-old class A CDL holder in Iowa. He has a history of epilepsy and has remained seizure free since 2010. He takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Ericson receiving an exemption.

###### *Kristopher Alan Fraser*

Mr. Fraser is a 31 year-old driver in Washington. He has a history of epilepsy and has remained seizure free since 2007. He takes anti-seizure medication with a change in dosage in October 2014. If granted the exemption, he would like to drive a CMV. His physician states that he is not supportive of Mr. Fraser receiving an exemption.

###### *Todd A. Fuller*

Mr. Fuller is a 45 year-old driver in Pennsylvania. He has a history of a seizure in January 2014. He takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Fuller receiving an exemption.

###### *Thomas A. Granese*

Mr. Granese is a 70 year-old class A CDL holder in Massachusetts. He has a history of seizure disorder and has

remained seizure free since 2003. He takes anti-seizure medication with the dosage and frequency remaining the same since 2010. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Granese receiving an exemption.

*Paul E. Granger*

Mr. Granger is a 50 year-old chauffeur license holder in Michigan. He has a history of a seizure disorder and has remained seizure free since 1987. He takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, she would like to drive a CMV. His physician states that he is supportive of Mr. Granger receiving an exemption.

*Charles Terrell Gray*

Mr. Gray is a 69 year-old driver in Oklahoma. He has a history of a single unprovoked seizure and has remained seizure free since 1993. He takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Gray receiving an exemption.

*David Allen Griggs*

Mr. Griggs is a 55 year-old class A CDL holder in Minnesota. He has a history of a seizure disorder and has remained seizure free since 1987. He takes anti-seizure medication with the dosage and frequency remaining the same since April 2013. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Griggs receiving an exemption.

*Howard Pearce Hill*

Mr. Hill is a 67 year-old class A CDL holder in Georgia. He has a history of a seizure disorder and has remained seizure free since 1990. He takes anti-seizure medication with the dosage and frequency remaining the same since January 2015. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Hill receiving an exemption.

*Eric A. Hilmer*

Mr. Hilmer is a 39 year-old class A CDL holder in Wisconsin. He has a history of epilepsy and has remained seizure free since 2007. He takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, he would like to drive a CMV. His

physician states that he is supportive of Mr. Hilmer receiving an exemption.

*Dennis Edward Klammm*

Mr. Klammm is a 52 year-old class C CDL holder in Minnesota. He has a history of a seizure disorder and has remained seizure free since 1987. He takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Klammm receiving an exemption.

*Victor John Martinez*

Mr. Martinez is a 26 year-old driver in California. He has a history of epilepsy and suffered a seizure in December 2013. He underwent a left temporal craniotomy and lobectomy in 2013. He takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, he would like to drive a CMV.

*Sean Michael Monroe*

Mr. Monroe is a 42 year-old driver in Virginia. He has a history of epilepsy and has remained seizure free since 2011. He takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Monroe receiving an exemption.

*Christina L. Petti*

Ms. Petti is a 45 year-old class B CDL holder in New Jersey. She has a history of a seizure disorder and has remained seizure free since 1985. She takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, she would like to drive a CMV. Her physician states that he is supportive of Ms. Petti receiving an exemption.

*Robert H. Philley*

Mr. Philley is a 47 year-old driver in California. He has a history of a seizure disorder and has remained seizure free since 2013. He takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Philley receiving an exemption.

*Christopher L. Phillips*

Mr. Phillips is a 46 year-old class A CDL holder in Pennsylvania. He has a history of a seizure disorder and has remained seizure free since 1989. He

takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Phillips receiving an exemption.

*David T. Pomianek, Jr.*

Mr. Pomianek is a 37 year-old class A CDL holder in New Jersey. He has a history of epilepsy and has remained seizure free since 2011. He takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Pomianek receiving an exemption.

*Gregory Roy Schaefer*

Mr. Schaefer is a 46 year-old driver in Texas. He has a history of a single seizure in June 2014. He takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Schaefer receiving an exemption.

*Maciej Skrzyniarz*

Mr. Skrzyniarz is a 28 year-old class A CDL holder in Illinois. He has a history of a single seizure in February 2014 associated with alcohol consumption. He takes anti-seizure medication with the dosage and frequency remaining the same since that time. If granted the exemption, he would like to drive a CMV. His physician states that he is supportive of Mr. Skrzyniarz receiving an exemption.

#### **Request for Comments**

In accordance with 49 U.S.C. 31315 and 31136(e), FMCSA requests public comment from all interested persons on the exemption applications described in this notice. We will consider all comments received before the close of business on the closing date indicated earlier in the notice.

Issued on: July 1, 2015.

**Larry W. Minor,**

*Associate Administrator for Policy.*

[FR Doc. 2015-17022 Filed 7-10-15; 08:45 am]

**BILLING CODE 4910-EX-P**

## **DEPARTMENT OF TRANSPORTATION**

### **Federal Railroad Administration**

**[Docket Number FRA-2015-0059]**

#### **Petition for Waiver of Compliance**

In accordance with Part 211 of Title 49 of the Code of Federal Regulations

(CFR), this provides the public notice that by a document dated June 15, 2015, the Chicago, Fort Wayne & Eastern Railroad (CFER) has petitioned the Federal Railroad Administration (FRA) for a waiver of compliance from certain provisions of the Federal railroad safety regulations contained at Title 49 Code of Federal Regulations (CFR) part 213. FRA assigned the petition docket number FRA-2015-0059.

Pursuant to 49 CFR 213.119(h), CFER requests a waiver from the accepted practice to conduct walking joint bar inspections to detect cracks and other indications of potential joint failures in Continuous Welded Rail (CWR). The inspection will be conducted utilizing a Joint Bar Inspection System (JBIS). The JBIS system will conduct two tests in fiscal year 2015 with the target dates of July 20, 2015 and November 2, 2015. Accordingly, CFER is seeking approval from the FRA to use the JBIS to fulfill the requirements of the walking joint bar inspection required by 49 CFR 213.119(h).

A copy of the petition, as well as any written communications concerning the petition, is available for review online at [www.regulations.gov](http://www.regulations.gov) and in person at the Department of Transportation's Docket Operations Facility, 1200 New Jersey Ave. SE., W12-140, Washington, DC 20590. The Docket Operations Facility is open from 9 a.m. to 5 p.m., Monday through Friday, except Federal Holidays.

Interested parties are invited to participate in these proceedings by submitting written views, data, or comments. FRA does not anticipate scheduling a public hearing in connection with these proceedings since the facts do not appear to warrant a hearing. If any interested party desires an opportunity for oral comment, they should notify FRA, in writing, before the end of the comment period and specify the basis for their request.

All communications concerning these proceedings should identify the appropriate docket number (e.g., Waiver Petition Docket Number FRA-2015-0059) and may be submitted by any of the following methods:

**Web site:** <http://www.regulations.gov>. Follow the online instructions for submitting comments.

**Fax:** 202-493-2251.

**Mail:** Docket Operations Facility, U.S. Department of Transportation, 1200 New Jersey Avenue SE., W12-140, Washington, DC 20590.

**Hand Delivery:** 1200 New Jersey Avenue SE., Room W12-140, Washington, DC 20590, between 9 a.m. and 5 p.m., Monday through Friday, except Federal holidays.

Communications received by August 27, 2015 will be considered by FRA before final action is taken. Comments received after that date will be considered as far as practicable.

Anyone is able to search the electronic form of any written communications and comments received into any of our dockets by the name of the individual submitting the comment (or signing the document, if submitted on behalf of an association, business, labor union, etc.). In accordance with 5 U.S.C. 553(c), DOT solicits comments from the public to better inform its processes. DOT posts these comments, without edit, including any personal information the commenter provides, to [www.regulations.gov](http://www.regulations.gov), as described in the system of records notice (DOT/ALL-14 FDMS), which can be reviewed at [www.dot.gov/privacy](http://www.dot.gov/privacy). See also <http://www.regulations.gov/#/privacyNotice> for the privacy notice of regulations.gov.

Issued in Washington, DC, on July 6, 2015.

**Ron Hynes,**

*Director, Office of Technical Oversight.*

[FR Doc. 2015-16945 Filed 7-10-15; 8:45 am]

**BILLING CODE 4910-06-P**

## DEPARTMENT OF TRANSPORTATION

### Federal Railroad Administration

[Docket Number FRA-2015-0058]

#### Notice of Application for Approval of Discontinuance or Modification of a Railroad Signal System

In accordance with Part 235 of Title 49 of the Code of Federal Regulations (CFR) and 49 U.S.C. 20502(a), this document provides the public notice that by a document received June 19, 2015, the Canadian National Railroad (CN) petitioned the Federal Railroad Administration (FRA) seeking approval for the discontinuance or modification of a signal system. FRA assigned the petition Docket Number FRA-2015-0058.

**Applicant:** Canadian National Railroad, Mr. Corey Turner, S&C Supervisor, 297 Rivergate Drive, Memphis, TN 38109.

The CN seeks approval of the discontinuance of the Automatic Block Signal (ABS) system from milepost (MP) 398.2 to MP 403, on the Memphis Subdivision, in Memphis, TN. The reason for the discontinuance is that the ABS system is no longer needed for operations.

A copy of the petition, as well as any written communications concerning the petition, is available for review online at

[www.regulations.gov](http://www.regulations.gov) and in person at the U. S. Department of Transportation's Docket Operations Facility, 1200 New Jersey Avenue SE., W12-140, Washington, DC 20590. The Docket Operations Facility is open from 9 a.m. to 5 p.m., Monday through Friday, except Federal Holidays.

Interested parties are invited to participate in these proceedings by submitting written views, data, or comments. FRA does not anticipate scheduling a public hearing in connection with these proceedings since the facts do not appear to warrant a hearing. If any interested party desires an opportunity for oral comment, they should notify FRA, in writing, before the end of the comment period and specify the basis for their request.

All communications concerning these proceedings should identify the appropriate docket number and may be submitted by any of the following methods:

**Web site:** <http://www.regulations.gov>. Follow the online instructions for submitting comments.

**Fax:** 202-493-2251.

**Mail:** Docket Operations Facility, U.S. Department of Transportation, 1200 New Jersey Avenue SE., W12-140, Washington, DC 20590.

**Hand Delivery:** 1200 New Jersey Avenue SE., Room W12-140, Washington, DC 20590, between 9 a.m. and 5 p.m., Monday through Friday, except Federal Holidays.

Communications received by August 27, 2015 will be considered by FRA before final action is taken. Comments received after that date will be considered as far as practicable.

Anyone is able to search the electronic form of any written communications and comments received into any of our dockets by the name of the individual submitting the comment (or signing the document, if submitted on behalf of an association, business, labor union, etc.). In accordance with 5 U.S.C. 553(c), DOT solicits comments from the public to better inform its processes. DOT posts these comments, without edit, including any personal information the commenter provides, to [www.regulations.gov](http://www.regulations.gov), as described in the system of records notice (DOT/ALL-14 FDMS), which can be reviewed at [www.dot.gov/privacy](http://www.dot.gov/privacy). See also <http://www.regulations.gov/#/privacyNotice> for the privacy notice of regulations.gov.

Issued in Washington, DC, on July 6, 2015.

**Ron Hynes,**

*Director, Office of Technical Oversight.*

[FR Doc. 2015-16944 Filed 7-10-15; 8:45 am]

**BILLING CODE 4910-06-P**



**DEPARTMENT OF THE TREASURY****Internal Revenue Service****Open meeting of the Taxpayer Advocacy Panel Tax Forms and Publications Project Committee.**

**AGENCY:** Internal Revenue Service (IRS), Treasury.

**ACTION:** Notice of meeting.

**SUMMARY:** An open meeting of the Taxpayer Advocacy Panel Tax Forms and Publications Project Committee will be conducted. The Taxpayer Advocacy Panel is soliciting public comments, ideas and suggestions on improving customer service at the Internal Revenue Service.

**DATES:** The meeting will be held August 4, 2015.

**FOR FURTHER INFORMATION CONTACT:** Donna Powers at 1-888-912-1227 or (954) 423-7977.

**SUPPLEMENTARY INFORMATION:** Notice is hereby given pursuant to section 10(a)(2) of the Federal Advisory Committee Act, 5 U.S.C. App. (1988) that an open meeting of the Taxpayer Advocacy Panel Tax Forms and Publications Project Committee will be held Tuesday August 4, 2015 at 1:00 p.m.. Eastern Time via teleconference. The public is invited to make oral comments or submit written statements for consideration. Due to limited conference lines, notification of intent to participate must be made with Donna Powers. For more information please contact: Donna Powers at 1-888-912-1227 or (954) 423-7977 or write: TAP Office, 1000 S. Pine Island Road, Plantation, FL 33324 or contact us at the Web site: <http://www.improveirs.org>. The committee will be discussing various issues related to Tax Forms and Publications and public input is welcomed.

Dated: July 1, 2015.

**Otis Simpson,**

*Acting Director, Taxpayer Advocacy Panel.*

[FR Doc. 2015-17001 Filed 7-10-15; 8:45 am]

**BILLING CODE 4830-01-P**

**DEPARTMENT OF THE TREASURY****Internal Revenue Service****Open meeting of the Taxpayer Advocacy Panel Joint Committee.**

**AGENCY:** Internal Revenue Service (IRS), Treasury.

**ACTION:** Notice of meeting.

**SUMMARY:** An open meeting of the Taxpayer Advocacy Panel Joint

Committee will be conducted. The Taxpayer Advocacy Panel is soliciting public comments, ideas, and suggestions on improving customer service at the Internal Revenue Service.

**DATES:** The meeting will be held Tuesday, August 4, 2015 and Wednesday, August 5, 2015

**FOR FURTHER INFORMATION CONTACT:** Lisa Billups at 1-888-912-1227 or (214) 413-6523.

**SUPPLEMENTARY INFORMATION:** Notice is hereby given pursuant to Section 10(a)(2) of the Federal Advisory Committee Act, 5 U.S.C. App. (1988) that an open meeting of the Taxpayer Advocacy Panel Joint Committee will be held Tuesday, August 4, 2015 and Wednesday, August 5, 2015, from 8:00 a.m. to 5:00 p.m. Eastern Standard Time. The public is invited to make oral comments or submit written statements for consideration. Notification of intent to participate must be made with Lisa Billups. For more information please contact Lisa Billups at 1-888-912-1227 or (214) 413-6523 or write TAP Office, 1114 Commerce Street, Dallas, TX 75242, or contact us at the Web site: <http://www.improveirs.org>.

The agenda will include various committee issues for submission to the IRS and other TAP related topics. Public input is welcomed.

: Dated: July 1, 2015.

**Otis Simpson,**

*Acting Director, Taxpayer Advocacy Panel.*

[FR Doc. 2015-17000 Filed 7-10-15; 8:45 am]

**BILLING CODE P**

**DEPARTMENT OF THE TREASURY****Internal Revenue Service****Open Meeting of the Taxpayer Advocacy Panel Special Projects Committee**

**AGENCY:** Internal Revenue Service (IRS), Treasury.

**ACTION:** Notice of meeting.

**SUMMARY:** An open meeting of the Taxpayer Advocacy Panel Special Projects Committee will be conducted. The Taxpayer Advocacy Panel is soliciting public comments, ideas, and suggestions on improving customer service at the Internal Revenue Service.

**DATES:** The meeting will be held Thursday, August 6, 2015.

**FOR FURTHER INFORMATION CONTACT:** Kim Vinci at 1-888-912-1227 or 916-974-5086.

**SUPPLEMENTARY INFORMATION:** Notice is hereby given pursuant to Section 10(a)(2) of the Federal Advisory

Committee Act, 5 U.S.C. App. (1988) that a meeting of the Taxpayer Advocacy Panel Special Projects Committee will be held Thursday, August 6, 2015, at 2:00 p.m. Eastern Time via teleconference. The public is invited to make oral comments or submit written statements for consideration. Due to limited conference lines, notification of intent to participate must be made with Kim Vinci. For more information please contact: Kim Vinci at 1-888-912-1227 or 916-974-5086, TAP Office, 4330 Watt Ave., Sacramento, CA 95821, or contact us at the Web site: <http://www.improveirs.org>.

The agenda will include a discussion on various special topics with IRS processes.

Dated: July 1, 2015.

**Otis Simpson,**

*Acting Director, Taxpayer Advocacy Panel.*

[FR Doc. 2015-17005 Filed 7-10-15; 8:45 am]

**BILLING CODE 4830-01-P**

**DEPARTMENT OF THE TREASURY****Internal Revenue Service****Open meeting of the Taxpayer Advocacy Panel Joint Committee.**

**AGENCY:** Internal Revenue Service (IRS), Treasury.

**ACTION:** Notice of meeting.

**SUMMARY:** An open meeting of the Taxpayer Advocacy Panel Joint Committee will be conducted. The Taxpayer Advocacy Panel is soliciting public comments, ideas, and suggestions on improving customer service at the Internal Revenue Service.

**DATES:** The meeting will be held Wednesday, August 26, 2015.

**FOR FURTHER INFORMATION CONTACT:** Lisa Billups at 1-888-912-1227 or (214) 413-6523.

**SUPPLEMENTARY INFORMATION:** Notice is hereby given pursuant to Section 10(a)(2) of the Federal Advisory Committee Act, 5 U.S.C. App. (1988) that an open meeting of the Taxpayer Advocacy Panel Joint Committee will be held Wednesday, August 26, 2015, at 1:00 p.m. Eastern Time via teleconference. The public is invited to make oral comments or submit written statements for consideration. For more information please contact Lisa Billups at 1-888-912-1227 or 214-413-6523, or write TAP Office 1114 Commerce Street, Dallas, TX 75242-1021, or post comments to the Web site: <http://www.improveirs.org>.

The agenda will include various committee issues for submission to the

IRS and other TAP related topics. Public input is welcomed.

Dated: July 1, 2015.

Otis Simpson,

*Acting Director, Taxpayer Advocacy Panel.*

[FR Doc. 2015-17008 Filed 7-10-15; 8:45 am]

BILLING CODE 4830-01-P

## DEPARTMENT OF THE TREASURY

### Internal Revenue Service

#### Open Meeting of the Taxpayer Advocacy Panel Toll-Free Phone Line Project Committee

**AGENCY:** Internal Revenue Service (IRS), Treasury.

**ACTION:** Notice of meeting.

**SUMMARY:** An open meeting of the Taxpayer Advocacy Panel Toll-Free Phone Line Project Committee will be conducted. The Taxpayer Advocacy Panel is soliciting public comments, ideas, and suggestions on improving customer service at the Internal Revenue Service.

**DATES:** The meeting will be held Wednesday, August 19, 2015.

**FOR FURTHER INFORMATION CONTACT:** Linda Rivera at 1-888-912-1227 or (202) 317-3337.

**SUPPLEMENTARY INFORMATION:** Notice is hereby given pursuant to Section 10(a)(2) of the Federal Advisory Committee Act, 5 U.S.C. App. (1988) that an open meeting of the Taxpayer Advocacy Panel Toll-Free Phone Line Project Committee will be held Wednesday, August 19, 2015 at 2:30 p.m. Eastern Time via teleconference. The public is invited to make oral comments or submit written statements for consideration. Due to limited conference lines, notification of intent to participate must be made with Linda Rivera. For more information please contact: Ms. Rivera at 1-888-912-1227 or (202)317-3337, or write TAP Office, 1111 Constitution Avenue NW., Room 1509- National Office, Washington, DC 20224, or contact us at the Web site: <http://www.improveirs.org>.

The committee will be discussing Toll-free issues and public input is welcomed.

Dated: July 1, 2015.

Otis Simpson,

*Acting Director, Taxpayer Advocacy Panel.*

[FR Doc. 2015-17003 Filed 7-10-15; 8:45 am]

BILLING CODE 4830-01-P

## DEPARTMENT OF THE TREASURY

### Internal Revenue Service

#### Open meeting of the Taxpayer Advocacy Panel Notices and Correspondence Project Committee

**AGENCY:** Internal Revenue Service (IRS), Treasury.

**ACTION:** Notice of meeting.

**SUMMARY:** An open meeting of the Taxpayer Advocacy Panel Notices and Correspondence Project Committee will be conducted. The Taxpayer Advocacy Panel is soliciting public comments, ideas, and suggestions on improving customer service at the Internal Revenue Service.

**DATES:** The meeting will be held Thursday, August 13, 2015.

**FOR FURTHER INFORMATION CONTACT:** Theresa Singleton at 1-888-912-1227 or 202-317-3329.

**SUPPLEMENTARY INFORMATION:** Notice is hereby given pursuant to Section 10(a)(2) of the Federal Advisory Committee Act, 5 U.S.C. App. (1988) that a meeting of the Taxpayer Advocacy Panel Notices and Correspondence Project Committee will be held Thursday, August 13, 2015, at 12:00 p.m. Eastern Time via teleconference. The public is invited to make oral comments or submit written statements for consideration. Due to limited conference lines, notification of intent to participate must be made with Theresa Singleton. For more information please contact: Theresa Singleton at 1-888-912-1227 or 202-317-3329, TAP Office, 1111 Constitution Avenue NW., Room 1509- National Office, Washington, DC 20224, or contact us at the Web site: <http://www.improveirs.org>.

The agenda will include a discussion on various letters, and other issues related to written communications from the IRS.

Dated: July 1, 2015.

Otis Simpson,

*Acting Director, Taxpayer Advocacy Panel.*

[FR Doc. 2015-17004 Filed 7-10-15; 8:45 am]

BILLING CODE 4830-01-P

## DEPARTMENT OF THE TREASURY

### Internal Revenue Service

#### Open Meeting of the Taxpayer Advocacy Panel Taxpayer Assistance Center Improvements Project Committee

**AGENCY:** Internal Revenue Service (IRS) Treasury.

**ACTION:** Notice of meeting.

**SUMMARY:** An open meeting of the Taxpayer Advocacy Panel Taxpayer Assistance Center Improvements Project Committee will be conducted. The Taxpayer Advocacy Panel is soliciting public comments, ideas, and suggestions on improving customer service at the Internal Revenue Service.

**DATES:** The meeting will be held Wednesday, August 12, 2015.

**FOR FURTHER INFORMATION CONTACT:** Otis Simpson at 1-888-912-1227 or 202-317-3332.

**SUPPLEMENTARY INFORMATION:** Notice is hereby given pursuant to Section 10(a)(2) of the Federal Advisory Committee Act, 5 U.S.C. App. (1988) that a meeting of the Taxpayer Advocacy Panel Taxpayer Assistance Center Improvements Project Committee will be held Wednesday, August 12, 2015, at 3:00 p.m. Eastern Time. The public is invited to make oral comments or submit written statements for consideration. Due to limited conference lines, notification of intent to participate must be made with Otis Simpson. For more information please contact: Otis Simpson at 1-888-912-1227 or 202-317-3332, TAP Office, 1111 Constitution Avenue NW., Room 1509- National Office, Washington, DC 20224, or contact us at the Web site: <http://www.improveirs.org>.

The committee will be discussing various issues related to the Taxpayer Assistance Centers and public input is welcomed.

Dated: July 1, 2015.

Otis Simpson,

*Acting Director, Taxpayer Advocacy Panel.*

[FR Doc. 2015-17007 Filed 7-10-15; 8:45 am]

BILLING CODE 4830-01-P

## DEPARTMENT OF THE TREASURY

### Submission for OMB Review; Comment Request

**AGENCY:** Department of the Treasury.  
**Notice:** Notice.

The Department of the Treasury will submit the following information collection request to the Office of Management and Budget (OMB) for review and clearance in accordance with the Paperwork Reduction Act of 1995, Public Law 104-13, on or after the date of publication of this notice.

**DATES:** Comments should be received on or before August 12, 2015 to be assured of consideration.

**ADDRESSES:** Send comments regarding the burden estimate, or any other aspect of the information collection, including

suggestions for reducing the burden, to (1) Office of Information and Regulatory Affairs, Office of Management and Budget, Attention: Desk Officer for Treasury, New Executive Office Building, Room 10235, Washington, DC 20503, or email at [OIRA\\_Submission@OMB.EOP.gov](mailto:OIRA_Submission@OMB.EOP.gov) and (2) Treasury PRA Clearance Officer, 1750 Pennsylvania Ave. NW., Suite 8140, Washington, DC 20220, or email at [PRA@treasury.gov](mailto:PRA@treasury.gov).

**FOR FURTHER INFORMATION CONTACT:**

Copies of the submission(s) may be obtained by emailing [PRA@treasury.gov](mailto:PRA@treasury.gov) or viewing the entire information collection request at [www.reginfo.gov](http://www.reginfo.gov).

**Departmental Offices, Treasury Inspector General for Tax Administration (TIGTA)**

OMB Number: 1505–0217.

*Type of Review:* Extension without change of a currently approved collection.

*Title:* Treasury Inspector General for Tax Administration (TIGTA) Generic Survey.

*Abstract:* The TIGTA's Office of Audit's mission is to provide independent oversight of IRS activities. Through its audit programs TIGTA promotes efficiency and effectiveness in the administration of internal revenue laws, including the prevention and detection of fraud, waste, and abuse affecting tax administration. To accomplish this, TIGTA Office of Audit at times finds it necessary to contact a limited number of taxpayers (including businesses) for various reasons.

*Affected Public:* Individuals or Households; Private Sector: Businesses or other for-profits.

*Estimated Burden Hours:* 2,500.

Dated: July 7, 2015.

**Dawn D. Wolfgang,**

*Treasury PRA Clearance Officer.*

[FR Doc. 2015–16963 Filed 7–10–15; 8:45 am]

**BILLING CODE 4810–25–P**

**DEPARTMENT OF THE TREASURY**

**United States Mint**

**Pricing for the 2015 American Liberty High Relief Gold Coin**

**AGENCY:** United States Mint, Department of the Treasury.

**ACTION:** Notice.

**SUMMARY:** The United States Mint is announcing the price of the 2015 American Liberty High Relief Gold Coin. This coin will be offered for sale based on the following pricing grid.

Weekly average gold price	Size	2015 American Liberty High Relief Gold Coin
\$1,000.00 to \$1,049.99 .....	1 Troy oz. ....	\$1,440.00
\$1,050.00 to \$1,099.99 .....	1 Troy oz. ....	1,490.00
\$1,100.00 to \$1,149.99 .....	1 Troy oz. ....	1,540.00
\$1,150.00 to \$1,199.99 .....	1 Troy oz. ....	1,590.00
\$1,200.00 to \$1,249.99 .....	1 Troy oz. ....	1,640.00
\$1,250.00 to \$1,299.99 .....	1 Troy oz. ....	1,690.00
\$1,300.00 to \$1,349.99 .....	1 Troy oz. ....	1,740.00
\$1,350.00 to \$1,399.99 .....	1 Troy oz. ....	1,790.00
\$1,400.00 to \$1,449.99 .....	1 Troy oz. ....	1,840.00
\$1,450.00 to \$1,499.99 .....	1 Troy oz. ....	1,890.00
\$1,500.00 to \$1,549.99 .....	1 Troy oz. ....	1,940.00
\$1,550.00 to \$1,599.99 .....	1 Troy oz. ....	1,990.00
\$1,600.00 to \$1,649.99 .....	1 Troy oz. ....	2,040.00
\$1,650.00 to \$1,699.99 .....	1 Troy oz. ....	2,090.00

Pricing can vary weekly dependent upon the LBMA London Gold Price weekly average gold price. Pricing is evaluated every Wednesday and is modified if necessary.

**FOR FURTHER INFORMATION CONTACT:**

Nanette Evans, Division Chief; Product Management Division; United States Mint; 801 9th Street NW., Washington, DC 20220; or call 202–354–7500.

**Authority:** 31 U.S.C. 5111, 5112, and 9701

Dated: July 7, 2015.

**Richard A. Peterson,**

*Deputy Director for Manufacturing and Quality, United States Mint.*

[FR Doc. 2015–17009 Filed 7–10–15; 8:45 am]

**BILLING CODE P**

**DEPARTMENT OF VETERANS AFFAIRS**

**[OMB Control No. 2900–NEW]**

**Agency Information Collection (Veterans Transportation Service Data Collection) Activities: under OMB Review**

**AGENCY:** Veterans Health Administration, Department of Veterans Affairs

**ACTION:** Notice

**SUMMARY:** In compliance with the Paperwork Reduction Act (PRA) of 1995 (44 U.S.C. 3501–3521), this notice announces that the Veterans Health Administration (VHA), Department of Veterans Affairs, will submit the collection of information abstracted below to the Office of Management and Budget (OMB) for review and comment. The PRA submission describes the nature of the information collection and its expected cost and burden and

includes the actual data collection instrument.

**DATES:** Written comments and recommendations on the proposed collection of information should be received on or before August 12, 2015.

**ADDRESSES:** Submit written comments on the collection of information through [www.Regulations.gov](http://www.Regulations.gov), or to Office of Information and Regulatory Affairs, Office of Management and Budget, Attn: VA Desk Officer; 725 17th St. NW., Washington, DC 20503 or sent through electronic mail to [oira\\_submission@omb.eop.gov](mailto:oira_submission@omb.eop.gov). Please refer to “OMB Control No. 2900–NEW (Veterans Transportation Service Data Collection)” in any correspondence. During the comment period, comments may be viewed online through the FDMS.

**FOR FURTHER INFORMATION CONTACT:** Crystal Rennie, Enterprise Records Service (005R1B), Department of Veterans Affairs, 810 Vermont Avenue

NW., Washington, DC 20420, (202) 632-7492 or email [crystal.rennie@va.gov](mailto:crystal.rennie@va.gov). Please refer to “OMB Control No. 2900-NEW (Veterans Transportation Service Data Collection)” in any correspondence.

**SUPPLEMENTARY INFORMATION:** Under the PRA of 1995 (Pub. L. 104-13; 44 U.S.C. 3501-3521), Federal agencies must obtain approval from the Office of Management and Budget (OMB) for each collection of information they conduct or sponsor. This request for comment is being made pursuant to Section 3506(c)(2)(A) of the PRA.

With respect to the following collection of information, VHA invites comments on: (1) whether the proposed collection of information is necessary for the proper performance of VHA's functions, including whether the information will have practical utility; (2) the accuracy of VHA's estimate of the burden of the proposed collection of information; (3) ways to enhance the quality, utility, and clarity of the information to be collected; and (4) ways to minimize the burden of the collection of information on respondents, including through the use of automated collection techniques or the use of other forms of information technology.

**Titles:** Veterans Transportation Service (VTS) Data Collection.

**OMB Control Number:** 2900-NEW (Veterans Transportation Service Data Collection).

**Type of Review:** New collection.

**Abstract:** The information collection is to ensure Veterans, Servicemembers, beneficiaries, caregivers and other persons receive timely and reliable transportation for the purpose of examination, treatment and care. VHA must identify the beneficiary, the dates and location required to plan a trip for scheduled or unscheduled appointments, and ensure reimbursement of beneficiary travel mileage is not paid for transportation provided through VTS. Information is also collected to facilitate overall evaluation of the effectiveness of the allocation of resources for VTS.

An agency may not conduct or sponsor, and a person is not required to respond to a collection of information unless it displays a currently valid OMB control number. The **Federal Register** Notice with a 60-day comment period soliciting comments on this collection of information was published at 79 FR 74814, December 16, 2014.

**Affected Public:** Individuals or households.

**Estimated Annual Burden:** 334,895 burden hours.

**Estimated Average Burden Per Respondent:** 5 minutes.

**Frequency of Response:** 3.32 (On Occasion).

**Estimated Number of Respondents:** 100,872.

By direction of the Secretary.

**Kathleen M. Manwell,**

*VA Privacy Service, Office of Privacy and Records Management, Department of Veterans Affairs.*

[FR Doc. 2015-16950 Filed 7-10-15; 8:45 am]

**BILLING CODE 8320-01-P**

## DEPARTMENT OF VETERANS AFFAIRS

[OMB Control No. 2900-NEW]

### Proposed Information Collection (VHA Homeless Programs Project CHALENG (Community Homelessness Assessment, Local Education and Networking Groups) for Veterans)

**Activity:** Comment Request.

**AGENCY:** Veterans Health Administration, Department of Veterans Affairs.

**ACTION:** Notice.

**SUMMARY:** The Veterans Health Administration (VHA), Department of Veterans Affairs (VA), is announcing an opportunity for public comment on the proposed collection of certain information by the agency. Under the Paperwork Reduction Act (PRA) of 1995, Federal agencies are required to publish notice in the **Federal Register** concerning each proposed collection of information, including each new collection, and allow 60 days for public comment in response to the notice. This notice solicits comments on the information needed for Veterans, Veteran Representatives and health care providers to request reimbursement from the federal government for emergency services at a private institution.

**DATES:** Written comments and recommendations on the proposed collection of information should be received on or before September 11, 2015.

**ADDRESSES:** Submit written comments on the collection of information through Federal Docket Management System (FDMS) at [www.Regulations.gov](http://www.Regulations.gov); or Audrey Revere, Office of Regulatory and Administrative Affairs, Veterans Health Administration (10B4), Department of Veterans Affairs, 810 Vermont Avenue NW., Washington, DC 20420 or email: [Audrey.revere@va.gov](mailto:Audrey.revere@va.gov). Please refer to “VHA Homeless Programs Project CHALENG, OMB Control No. 2900-

NEW” in any correspondence. During the comment period, comments may be viewed online through the FDMS.

**FOR FURTHER INFORMATION CONTACT:**

Audrey Revere at (202) 461-5694.

**SUPPLEMENTARY INFORMATION:** Under the PRA of 1995 (Pub. L. 104-13; 44 U.S.C. 3501-3521), Federal agencies must obtain approval from the Office of Management and Budget (OMB) for each collection of information they conduct or sponsor. This request for comment is being made pursuant to Section 3506(c)(2)(A) of the PRA.

With respect to the following collection of information, VHA invites comments on: (1) Whether the proposed collection of information is necessary for the proper performance of VHA's functions, including whether the information will have practical utility; (2) the accuracy of VHA's estimate of the burden of the proposed collection of information; (3) ways to enhance the quality, utility, and clarity of the information to be collected; and (4) ways to minimize the burden of the collection of information on respondents, including through the use of automated collection techniques or the use of other forms of information technology.

**Titles:** VHA Homeless Programs, Project CHALENG (Community Homelessness Assessment, Local Education and Networking Groups) for Veterans.

**OMB Control Number:** 2900-NEW.

**Type of Review:** New Collection Request.

**Abstract:** In 1993 the Department of Veterans Affairs (VA) launched Project CHALENG (Community Homelessness Assessment, Local Education and Networking Groups) for Veterans in response to Public Law 102-405 which required VA to make an assessment of the needs of homeless Veterans in coordination with other Federal departments, state and local government agencies, and nongovernmental agencies with experience working with homeless persons. Since 1993, VA has administered a needs assessment in accordance with guidance in Public Law 103-446 and Public Law 105-114.

This collection of information is necessary to ensure that VA and community partners are developing services that are responsive to the needs of local homeless Veterans, in order to end homelessness and prevent new Veterans from experiencing homelessness. Over the years data from CHALENG has assisted VA in developing new services for Veterans such as the Homeless Veteran Dental Program (HVDP), the expansion of the

Department of Housing and Urban Development-VA Supportive Housing (HUD-VASH) Program, the Veterans Justice Programs and Supportive Services for Veteran Families (SSVF). In addition community organizations use CHALENG data in grant applications to support services for homeless Veterans; grant applications are for VA, other Federal, local government, and community foundation dollars, which maximizes community participation in serving homeless Veterans.

*Affected Public:* Individuals or Households.

*Estimated Annual Burden:* 1,650 burden hours.

*Estimated Average Burden Per Respondent:* 5 minutes.

*Frequency of Response:* Annually.

*Estimated Number of Respondents:* 15,000.

By direction of the Secretary.

**Kathleen M. Manwell,**

*VA Privacy Service, Office of Privacy and Records Management, Department of Veterans Affairs.*

[FR Doc. 2015-16951 Filed 7-10-15; 8:45 am]

**BILLING CODE 8320-01-P**

## DEPARTMENT OF VETERANS AFFAIRS

[OMB Control No. 2900-0740]

### Proposed Information Collection (VA Forms 21P-0847) Activity: Comment Request

**AGENCY:** Veterans Benefits Administration, Department of Veterans Affairs.

**ACTION:** Notice.

**SUMMARY:** The Veterans Benefits Administration (VBA), Department of Veterans Affairs (VA), is announcing an opportunity for public comment on the proposed collection of certain information by the agency. Under the Paperwork Reduction Act (PRA) of 1995, Federal agencies are required to publish notice in the **Federal Register** concerning each proposed collection of information, including each proposed revision of a currently approved collection, and allow 60 days for public comment in response to the notice. This notice solicits comments on information needed to determine a claimant's entitlement to possible accrued benefits.

**DATES:** Written comments and recommendations on the proposed collection of information should be received on or before September 11, 2015.

**ADDRESSES:** Submit written comments on the collection of information through

Federal Docket Management System (FDMS) at [www.Regulations.gov](http://www.Regulations.gov) or to Nancy J. Kessinger, Veterans Benefits Administration (20M33), Department of Veterans Affairs, 810 Vermont Avenue NW, Washington, DC 20420 or email to [nancy.kessinger@va.gov](mailto:nancy.kessinger@va.gov). Please refer to "OMB Control No. 2900-0740" in any correspondence. During the comment period, comments may be viewed online through the FDMS.

#### FOR FURTHER INFORMATION CONTACT:

Nancy J. Kessinger at (202) 632-8924 or FAX (202) 632-8925.

**SUPPLEMENTARY INFORMATION:** Under the PRA of 1995 (Pub. L. 104-13; 44 U.S.C. 3501-21), Federal agencies must obtain approval from the Office of Management and Budget (OMB) for each collection of information they conduct or sponsor. This request for comment is being made pursuant to Section 3506(c)(2)(A) of the PRA.

With respect to the following collection of information, VBA invites comments on: (1) whether the proposed collection of information is necessary for the proper performance of VBA's functions, including whether the information will have practical utility; (2) the accuracy of VBA's estimate of the burden of the proposed collection of information; (3) ways to enhance the quality, utility, and clarity of the information to be collected; and (4) ways to minimize the burden of the collection of information on respondents, including through the use of automated collection techniques or the use of other forms of information technology.

*Title:* Request for Substitution of Claimant Upon Death of Claimant (VA Form 21P-0847),

*OMB Control Number:* 2900-0740.

*Type of Review:* Revision of a currently approved collection.

*Abstract:* The Department of Veterans Affairs (VA), through its Veterans Benefits Administration (VBA), administers an integrated program of benefits and services established by law for veterans, service personnel, and their dependents and/or beneficiaries. Information requested by this form is authorized under the authority of 38 U.S.C. 5121A, Payment of Certain Accrued Benefits Upon Death of a Beneficiary.

*Affected Public:* Individuals or households.

*Estimated Annual Burden:* 1,667 hours

*Estimated Average Burden Per Respondent:* 5 minutes

*Frequency of Response:* Once.

*Estimated Number of Respondents:* 20,000.

By direction of the Secretary.

**Kathleen M. Manwell,**

*VA Privacy Service, Office of Privacy and Records Management, Department of Veterans Affairs.*

[FR Doc. 2015-16948 Filed 7-10-15; 8:45 am]

**BILLING CODE 8320-01-P**

## DEPARTMENT OF VETERANS AFFAIRS

[OMB Control No. 2900-0788]

### Agency Information Collection (Description of Materials) Activity under OMB Review

**AGENCY:** Veterans Benefits Administration, Department of Veterans Affairs.

**ACTION:** Notice.

**SUMMARY:** In compliance with the Paperwork Reduction Act (PRA) of 1995 (44 U.S.C. 3501-3521), this notice announces that the Veterans Benefits Administration (VBA), Department of Veterans Affairs, will submit the collection of information abstracted below to the Office of Management and Budget (OMB) for review and comment. The PRA submission describes the nature of the information collection and its expected cost and burden; and it includes the actual data collection instrument.

**DATES:** Comments must be submitted on or before August 12, 2015.

**ADDRESSES:** Submit written comments on the collection of information through [www.Regulations.gov](http://www.Regulations.gov), or to Office of Information and Regulatory Affairs, Office of Management and Budget, Attn: VA Desk Officer; 725 17th St. NW., Washington, DC 20503 or sent through electronic mail to [oira\\_submission@omb.eop.gov](mailto:oira_submission@omb.eop.gov). Please refer to "OMB Control No. 2900-0788" in any correspondence. During the comment period, comments may be viewed online through FDMS.

#### FOR FURTHER INFORMATION CONTACT:

Crystal Rennie, Enterprise Records Service (005R1B), Department of Veterans Affairs, 810 Vermont Avenue NW, Washington, DC 20420, (202) 632-7492 or email [crystal.rennie@va.gov](mailto:crystal.rennie@va.gov). Please refer to "OMB Control No. 2900-0788" in any correspondence.

#### SUPPLEMENTARY INFORMATION:

*Title:* Description of Materials, VA Form 26-1852.

*OMB Control Number:* 2900-0788.

*Type of Review:* Revision of a currently approved collection.

*Abstract:* VA Form 26-1852 is used to document material used in the construction of a dwelling or

specifically adapted housing project. VA appraiser's will use the information collected to establish the value and/or cost of adaptations for the property before it is constructed.

An agency may not conduct or sponsor, and a person is not required to respond to a collection of information unless it displays a currently valid OMB control number. The **Federal Register** Notice with a 60-day comment period soliciting comments on this collection of information was published at 80 FR 03067 on February 17, 2015.

*Affected Public:* Individuals or households.

*Estimated Annual Burden:* 1,800 hours.

*Estimated Average Burden Per Respondent:* 30 minutes.

*Frequency of Response:* One-time.

*Estimated Number of Respondents:* 3,600.

By direction of the Secretary.

**Kathleen M. Manwell,**

*VA Privacy Service, Office of Privacy and Records Management, Department of Veterans Affairs.*

[FR Doc. 2015-16947 Filed 7-10-15; 8:45 am]

**BILLING CODE 8320-01-P**

## DEPARTMENT OF VETERANS AFFAIRS

[OMB Control No. 2900-0681]

### Agency Information Collection: Preliminary Independent Living (IL) Assessment, VA Form 28-0791

**AGENCY:** Veterans Benefits Administration, Department of Veterans Affairs.

**ACTION:** Notice.

**SUMMARY:** In compliance with the Paperwork Reduction Act (PRA) of 1995 (44 U.S.C. 3501-3521), this notice announces that the Veterans Benefits Administration (VBA), Department of Veterans Affairs, will submit the collection of information abstracted below to the Office of Management and Budget (OMB) for review and comment. The PRA submission describes the nature of the information collection and

its expected cost and burden; it includes the actual data collection instrument.

**DATES:** Comments must be submitted on or before August 12, 2015.

**ADDRESSES:** Submit written comments on the collection of information through *www.Regulations.gov*, or to Office of Information and Regulatory Affairs, Office of Management and Budget, Attn: VA Desk Officer; 725 17th St. NW., Washington, DC 20503 or sent through electronic mail to *oira\_submission@omb.eop.gov*. Please refer to "OMB Control No. 2900-0681" in any correspondence.

#### FOR FURTHER INFORMATION CONTACT:

Crystal Rennie, Enterprise Records Service (005R1B), Department of Veterans Affairs, 810 Vermont Avenue NW, Washington, DC 20420, (202) 632-7492 or email *crystal.rennie@va.gov*. Please refer to "OMB Control No. 2900-0681."

#### SUPPLEMENTARY INFORMATION: Title:

Preliminary Independent Living (IL) Assessment.

*OMB Control Number:* 2900-0681.

*Type of Review:* Revision of a currently approved collection.

*Abstract:* VA case managers use VA Form 28-0791 while evaluating the independent living needs of veterans with severe disabilities. The data is used to determine the scope of the veteran's independent living under the Vocational Rehabilitation and Employment program.

An agency may not conduct or sponsor, and a person is not required to respond to a collection of information unless it displays a currently valid OMB control number. The **Federal Register** Notice with a 60-day comment period soliciting comments on this collection of information was published at 80 FR 03446 on February 19, 2015.

*Affected Public:* Individuals or households.

*Estimated Annual Burden:* 2,500 hours.

*Estimated Average Burden per Respondent:* 1 hour.

*Frequency of Response:* One-time.

*Estimated Number of Respondents:* 2,500.

By direction of the Secretary.

**Kathleen M. Manwell,**

*VA Privacy Service, Office of Privacy and Records Management,*

*Department of Veterans Affairs.*

[FR Doc. 2015-16949 Filed 7-10-15; 8:45 am]

**BILLING CODE 8320-01-P**

## DEPARTMENT OF VETERANS AFFAIRS

[OMB Control No. 2900-0128]

### Proposed Information Collection (Notice of Lapse & Application for Reinstatement) Activity: Withdrawal

**AGENCY:** Veterans Benefits Administration, Department of Veterans Affairs.

**ACTION:** Notice; withdrawal.

**SUMMARY:** On Friday, May 15, 2015, The Veterans Benefits Administration (VBA), Department of Veterans Affairs (VA), published a notice in the **Federal Register** announcing an opportunity for public comment on the proposed collection Notice of Lapse & Application for Reinstatement. This notice (FR Vol. 80, Number 94, May 15, 2015) was published in error; therefore this document corrects that error by withdrawing this FR notice, document number 2015-28050-28051.

**DATES:** Withdraw FR notice published on Friday, May 15, 2015.

#### FOR FURTHER INFORMATION CONTACT:

Crystal Rennie, Enterprise Records Service (005R1B), Department of Veterans Affairs, 810 Vermont Avenue NW., Washington, DC 20420, at (202) 632-7492.

FR Doc. 2015, published on May 15, 2015 (FR Vol 80, Number 94), is withdrawn by this notice.

By direction of the Secretary.

**Kathleen M. Manwell,**

*VA Privacy Service, Office of Privacy and Records Management, Department of Veterans Affairs.*

[FR Doc. 2015-16946 Filed 7-10-15; 8:45 am]

**BILLING CODE 8320-01-P**



# FEDERAL REGISTER

---

Vol. 80                      Monday,  
No. 133                     July 13, 2015

Book 2 of 3 Books

Pages 40137–40766

---

Part II

## Environmental Protection Agency

---

40 CFR Parts 9, 22, 85, et al.

## Department of Transportation

---

National Highway Traffic Safety Administration

---

49 CFR Parts 512, 523, 534, et al.

Greenhouse Gas Emissions and Fuel Efficiency Standards for Medium- and Heavy-Duty Engines and Vehicles—Phase 2; Proposed Rule



**ENVIRONMENTAL PROTECTION AGENCY**

**40 CFR Parts 9, 22, 85, 86, 600, 1033, 1036, 1037, 1039, 1042, 1043, 1065, 1066, and 1068**

**DEPARTMENT OF TRANSPORTATION****National Highway Traffic Safety Administration**

**49 CFR Parts 512, 523, 534, 535, 537, and 538**

[EPA–HQ–OAR–2014–0827; NHTSA–2014–0132; FRL–9927–21–OAR]

RIN 2060–AS16; RIN 2127–AL52

**Greenhouse Gas Emissions and Fuel Efficiency Standards for Medium- and Heavy-Duty Engines and Vehicles—Phase 2**

**AGENCY:** Environmental Protection Agency (EPA) and Department of Transportation (DOT) National Highway Traffic Safety Administration (NHTSA)

**ACTION:** Proposed rule.

**SUMMARY:** EPA and NHTSA, on behalf of the Department of Transportation, are each proposing rules to establish a comprehensive Phase 2 Heavy-Duty (HD) National Program that will reduce greenhouse gas (GHG) emissions and fuel consumption for new on-road heavy-duty vehicles. This technology-advancing program would phase in over the long-term, beginning in the 2018 model year and culminating in standards for model year 2027, responding to the President's directive on February 18, 2014, to develop new standards that will take us well into the next decade. NHTSA's proposed fuel consumption standards and EPA's proposed carbon dioxide (CO<sub>2</sub>) emission standards are tailored to each of four regulatory categories of heavy-duty vehicles: Combination tractors; trailers used in combination with those tractors; heavy-duty pickup trucks and vans; and vocational vehicles. The proposal also includes separate standards for the engines that power combination tractors and vocational vehicles. Certain proposed requirements for control of GHG emissions are exclusive to EPA programs. These include EPA's proposed hydrofluorocarbon standards to control leakage from air conditioning systems in vocational vehicles, and EPA's proposed nitrous oxide (N<sub>2</sub>O) and methane (CH<sub>4</sub>) standards for heavy-duty engines. Additionally, NHTSA is addressing misalignment in the Phase 1 standards between EPA and NHTSA to ensure there are no differences in

compliance standards between the agencies. In an effort to promote efficiency, the agencies are also proposing to amend their rules to modify reporting requirements, such as the method by which manufacturers submit pre-model, mid-model, and supplemental reports. EPA's proposed HD Phase 2 GHG emission standards are authorized under the Clean Air Act and NHTSA's proposed HD Phase 2 fuel consumption standards authorized under the Energy Independence and Security Act of 2007. These standards would begin with model year 2018 for trailers under EPA standards and 2021 for all of the other heavy-duty vehicle and engine categories. The agencies estimate that the combined standards would reduce CO<sub>2</sub> emissions by approximately 1 billion metric tons and save 1.8 billion barrels of oil over the life of vehicles and engines sold during the Phase 2 program, providing over \$200 billion in net societal benefits. As noted, the proposal also includes certain EPA-specific provisions relating to control of emissions of pollutants other than GHGs. EPA is seeking comment on non-GHG emission standards relating to the use of auxiliary power units installed in tractors. In addition, EPA is proposing to clarify the classification of natural gas engines and other gaseous-fueled heavy-duty engines, and is proposing closed crankcase standards for emissions of all pollutants from natural gas heavy-duty engines. EPA is also proposing technical amendments to EPA rules that apply to emissions of non-GHG pollutants from light-duty motor vehicles, marine diesel engines, and other nonroad engines and equipment. Finally, EPA is proposing to require that rebuilt engines installed in new incomplete vehicles meet the emission standards applicable in the year of assembly, including all applicable standards for criteria pollutants.

**DATES:** Comments on all aspects of this proposal must be received on or before September 11, 2015. Under the Paperwork Reduction Act (PRA), comments on the information collection provisions are best assured of consideration if the Office of Management and Budget (OMB) receives a copy of your comments on or before August 12, 2015.

EPA and NHTSA will announce the public hearing dates and locations for this proposal in a supplemental **Federal Register** document.

**ADDRESSES:** Submit your comments, identified by Docket ID No. EPA–HQ–OAR–2014–0827 (for EPA's docket) and NHTSA–2014–0132 (for NHTSA's

docket) by one of the following methods:

- **Online:** [www.regulations.gov](http://www.regulations.gov): Follow the on-line instructions for submitting comments.

- **Email:** [a-and-r-docket@epa.gov](mailto:a-and-r-docket@epa.gov).

- **Mail:**

**EPA:** Air and Radiation Docket and Information Center, Environmental Protection Agency, Mail code: 28221T, 1200 Pennsylvania Ave. NW., Washington, DC 20460.

**NHTSA:** Docket Management Facility, M–30, U.S. Department of Transportation, West Building, Ground Floor, Rm. W12–140, 1200 New Jersey Avenue SE., Washington, DC 20590.

- **Hand Delivery:**

**EPA:** EPA Docket Center, EPA WJC West Building, Room 3334, 1301 Constitution Ave. NW., Washington, DC 20460. Such deliveries are only accepted during the Docket's normal hours of operation, and special arrangements should be made for deliveries of boxed information.

**NHTSA:** West Building, Ground Floor, Rm. W12–140, 1200 New Jersey Avenue SE., Washington, DC 20590, between 9 a.m. and 4 p.m. Eastern Time, Monday through Friday, except Federal holidays.

**Instructions:** EPA and NHTSA have established dockets for this action under Direct your comments to Docket ID No. EPA–HQ–OAR–2014–0827 and/or NHTSA–2014–0132, respectively. See the **SUPPLEMENTARY INFORMATION** section on "Public Participation" for more information about submitting written comments.

**Docket:** All documents in the docket are listed on the [www.regulations.gov](http://www.regulations.gov) Web site. Although listed in the index, some information is not publicly available, e.g., confidential business information or other information whose disclosure is restricted by statute. Certain other material, such as copyrighted material, is not placed on the Internet and will be publicly available only in hard copy form. Publicly available docket materials are available either electronically through [www.regulations.gov](http://www.regulations.gov) or in hard copy at the following locations:

**EPA:** Air and Radiation Docket and Information Center, EPA Docket Center, EPA/DC, EPA WJC West Building, 1301 Constitution Ave. NW., Room 3334, Washington, DC. The Public Reading Room is open from 8:30 a.m. to 4:30 p.m., Monday through Friday, excluding legal holidays. The telephone number for the Public Reading Room is (202) 566–1744, and the telephone number for the Air Docket is (202) 566–1742.

**NHTSA:** Docket Management Facility, M–30, U.S. Department of

Transportation, West Building, Ground Floor, Rm. W12-140, 1200 New Jersey Avenue SE., Washington, DC 20590. The telephone number for the docket management facility is (202) 366-9324. The docket management facility is open between 9 a.m. and 5 p.m. Eastern Time, Monday through Friday, except Federal holidays.

**FOR FURTHER INFORMATION CONTACT:**

**EPA:** For hearing information or to register, please contact: JoNell Iffland, Office of Transportation and Air Quality, Assessment and Standards Division (ASD), Environmental Protection Agency, 2000 Traverwood Drive, Ann Arbor, MI 48105; Telephone number: (734) 214-4454; Fax number: (734) 214-4816; Email address: [iffland.jonell@epa.gov](mailto:iffland.jonell@epa.gov). For all other information related to the rule, please

contact: Tad Wysor, Office of Transportation and Air Quality, Assessment and Standards Division (ASD), Environmental Protection Agency, 2000 Traverwood Drive, Ann Arbor, MI 48105; telephone number: (734) 214-4332; email address: [wysor.tad@epa.gov](mailto:wysor.tad@epa.gov).

**NHTSA:** Ryan Hagen or Analiese Marchesseault, Office of Chief Counsel, National Highway Traffic Safety Administration, 1200 New Jersey Avenue SE., Washington, DC 20590. Telephone: (202) 366-2992; [ryan.hagen@dot.gov](mailto:ryan.hagen@dot.gov) or [analiese.marchesseault@dot.gov](mailto:analiese.marchesseault@dot.gov).

**SUPPLEMENTARY INFORMATION:**

**A. Does this action apply to me?**

This proposed action would affect companies that manufacture, sell, or

import into the United States new heavy-duty engines and new Class 2b through 8 trucks, including combination tractors, all types of buses, vocational vehicles including municipal, commercial, recreational vehicles, and commercial trailers as well as ¾-ton and 1-ton pickup trucks and vans. The heavy-duty category incorporates all motor vehicles with a gross vehicle weight rating of 8,500 lbs or greater, and the engines that power them, except for medium-duty passenger vehicles already covered by the greenhouse gas standards and corporate average fuel economy standards issued for light-duty model year 2017–2025 vehicles. Proposed regulated categories and entities include the following:

Category	NAICS code <sup>a</sup>	Examples of potentially affected entities
Industry .....	336111	Motor Vehicle Manufacturers, Engine Manufacturers, Truck Manufacturers, Truck Trailer Manufacturers.
	336112	
	333618	
	336120	
	336212	
Industry .....	541514	Commercial Importers of Vehicles and Vehicle Components.
	811112	
	811198	
Industry .....	336111	Alternative Fuel Vehicle Converters.
	336112	
	422720	
	454312	
	541514	
	541690	
	811198	

**Note:**<sup>a</sup> North American Industry Classification System (NAICS).

This table is not intended to be exhaustive, but rather provides a guide for readers regarding entities likely covered by these rules. This table lists the types of entities that the agencies are aware may be regulated by this action. Other types of entities not listed in the table could also be regulated. To determine whether your activities are regulated by this action, you should carefully examine the applicability criteria in the referenced regulations. You may direct questions regarding the applicability of this action to the persons listed in the preceding **FOR FURTHER INFORMATION CONTACT** section.

**B. Public Participation**

EPA and NHTSA request comment on all aspects of this joint proposed rule. This section describes how you can participate in this process.

*(1) How do I prepare and submit comments?*

In this joint proposal, there are many issues common to both EPA's and

NHTSA's proposals. For the convenience of all parties, comments submitted to the EPA docket will be considered comments submitted to the NHTSA docket, and vice versa. An exception is that comments submitted to the NHTSA docket on NHTSA's Draft Environmental Impact Statement (EIS) will not be considered submitted to the EPA docket. Therefore, the public only needs to submit comments to either one of the two agency dockets, although they may submit comments to both if they so choose. Comments that are submitted for consideration by one agency should be identified as such, and comments that are submitted for consideration by both agencies should be identified as such. Absent such identification, each agency will exercise its best judgment to determine whether a comment is submitted on its proposal.

Further instructions for submitting comments to either EPA or NHTSA docket are described below.

**EPA:** Direct your comments to Docket ID No. EPA-HQ-OAR-2014-0827.

EPA's policy is that all comments received will be included in the public docket without change and may be made available online at [www.regulations.gov](http://www.regulations.gov), including any personal information provided, unless the comment includes information claimed to be Confidential Business Information (CBI) or other information whose disclosure is restricted by statute. Do not submit information that you consider to be CBI or otherwise protected through [www.regulations.gov](http://www.regulations.gov) or email. The [www.regulations.gov](http://www.regulations.gov) Web site is an "anonymous access" system, which means EPA will not know your identity or contact information unless you provide it in the body of your comment. If you send an email comment directly to EPA without going through [www.regulations.gov](http://www.regulations.gov) your email address will be automatically captured and included as part of the comment that is placed in the public docket and made available on the Internet. If you submit an electronic comment, EPA recommends that you include your

name and other contact information in the body of your comment and with any disk or CD-ROM you submit. If EPA cannot read your comment due to technical difficulties and cannot contact you for clarification, EPA may not be able to consider your comment. Electronic files should avoid the use of special characters, any form of encryption, and be free of any defects or viruses. For additional information about EPA's public docket visit the EPA Docket Center homepage at <http://www.epa.gov/epahome/dockets.htm>.

**NHTSA:** Your comments must be written and in English. To ensure that your comments are correctly filed in the Docket, please include the Docket number NHTSA-2014-0132 in your comments. Your comments must not be more than 15 pages long.<sup>1</sup> NHTSA established this limit to encourage you to write your primary comments in a concise fashion. However, you may attach necessary additional documents to your comments, and there is no limit on the length of the attachments. If you are submitting comments electronically as a PDF (Adobe) file, we ask that the documents submitted be scanned using the Optical Character Recognition (OCR) process, thus allowing the agencies to search and copy certain portions of your submissions.<sup>2</sup> Please note that pursuant to the Data Quality Act, in order for the substantive data to be relied upon and used by the agency, it must meet the information quality standards set forth in the OMB and Department of Transportation (DOT) Data Quality Act guidelines. Accordingly, we encourage you to consult the guidelines in preparing your comments. OMB's guidelines may be accessed at <http://www.whitehouse.gov/omb/fedreg/reproducible.html>. DOT's guidelines may be accessed at <http://www.dot.gov/dataquality.htm>.

#### (2) Tips for Preparing Your Comments

When submitting comments, please remember to:

- Identify the rulemaking by docket number and other identifying information (subject heading, **Federal Register** date and page number).
- Explain why you agree or disagree, suggest alternatives, and substitute language for your requested changes.
- Describe any assumptions and provide any technical information and/or data that you used.
- If you estimate potential costs or burdens, explain how you arrived at

your estimate in sufficient detail to allow for it to be reproduced.

- Provide specific examples to illustrate your concerns, and suggest alternatives.
- Explain your views as clearly as possible, avoiding the use of profanity or personal threats.
- Make sure to submit your comments by the comment period deadline identified in the **DATES** section above.

*(3) How can I be sure that my comments were received?*

**NHTSA:** If you submit your comments by mail and wish Docket Management to notify you upon its receipt of your comments, enclose a self-addressed, stamped postcard in the envelope containing your comments. Upon receiving your comments, Docket Management will return the postcard by mail.

*(4) How do I submit confidential business information?*

Any confidential business information (CBI) submitted to one of the agencies will also be available to the other agency. However, as with all public comments, any CBI information only needs to be submitted to either one of the agencies' dockets and it will be available to the other. Following are specific instructions for submitting CBI to either agency. If you have any questions about CBI or the procedures for claiming CBI, please consult the persons identified in the **FOR FURTHER INFORMATION CONTACT** section.

**EPA:** Do not submit CBI to EPA through [www.regulations.gov](http://www.regulations.gov) or email. Clearly mark the part or all of the information that you claim to be CBI. For CBI information in a disk or CD ROM that you mail to EPA, mark the outside of the disk or CD ROM as CBI and then identify electronically within the disk or CD ROM the specific information that is claimed as CBI. Information not marked as CBI will be included in the public docket without prior notice. In addition to one complete version of the comment that includes information claimed as CBI, a copy of the comment that does not contain the information claimed as CBI must be submitted for inclusion in the public docket. Information so marked will not be disclosed except in accordance with procedures set forth in 40 CFR part 2.

**NHTSA:** If you wish to submit any information under a claim of confidentiality, you should submit three copies of your complete submission, including the information you claim to be confidential business information, to the Chief Counsel, NHTSA, at the

address given above under **FOR FURTHER INFORMATION CONTACT**. When you send a comment containing confidential business information, you should include a cover letter setting forth the information specified in our confidential business information regulation.<sup>3</sup>

In addition, you should submit a copy from which you have deleted the claimed confidential business information to the Docket by one of the methods set forth above.

*(5) How can I read the comments submitted by other people?*

You may read the materials placed in the docket for this document (e.g., the comments submitted in response to this document by other interested persons) at any time by going to <http://www.regulations.gov>. Follow the online instructions for accessing the dockets. You may also read the materials at the EPA Docket Center or NHTSA Docket Management Facility by going to the street addresses given above under **ADDRESSES**.

*(6) How do I participate in the public hearings?*

EPA and NHTSA will announce the public hearing dates and locations for this proposal in a supplemental **Federal Register** document. At all hearings, both agencies will accept comments on the rulemaking, and NHTSA will also accept comments on the EIS.

If you would like to present testimony at the public hearings, we ask that you notify EPA and NHTSA contact persons listed in the **FOR FURTHER INFORMATION CONTACT** section at least ten days before the hearing. Once EPA and NHTSA learn how many people have registered to speak at the public hearing, we will allocate an appropriate amount of time to each participant. For planning purposes, each speaker should anticipate speaking for approximately ten minutes, although we may need to adjust the time for each speaker if there is a large turnout. We suggest that you bring copies of your statement or other material for EPA and NHTSA panels. It would also be helpful if you send us a copy of your statement or other materials before the hearing. To accommodate as many speakers as possible, we prefer that speakers not use technological aids (e.g., audio-visuals, computer slideshows). However, if you plan to do so, you must notify the contact persons in the **FOR FURTHER INFORMATION CONTACT** section above. You also must make arrangements to provide your presentation or any other

<sup>1</sup> See 49 CFR 553.21.

<sup>2</sup> Optical character recognition (OCR) is the process of converting an image of text, such as a scanned paper document or electronic fax file, into computer-editable text.

<sup>3</sup> See 49 CFR part 512.

aids to EPA and NHTSA in advance of the hearing in order to facilitate set-up. In addition, we will reserve a block of time for anyone else in the audience who wants to give testimony. The agencies will assume that comments made at the hearings are directed to the proposed rule unless commenters specifically reference NHTSA's EIS in oral or written testimony.

The hearing will be held at a site accessible to individuals with disabilities. Individuals who require accommodations such as sign language interpreters should contact the persons listed under **FOR FURTHER INFORMATION CONTACT** section above no later than ten days before the date of the hearing.

EPA and NHTSA will conduct the hearing informally, and technical rules of evidence will not apply. We will arrange for a written transcript of the hearing and keep the official record of the hearing open for 30 days to allow you to submit supplementary information. You may make arrangements for copies of the transcript directly with the court reporter.

### C. Did EPA conduct a peer review before issuing this notice?

This regulatory action is supported by influential scientific information. Therefore, EPA conducted a peer review consistent with OMB's Final Information Quality Bulletin for Peer Review. As described in Section II.C.3, a peer review of updates to the vehicle simulation model (GEM) for the proposed Phase 2 standards has been completed. This version of GEM is based on the model used for the Phase 1 rule, which was peer-reviewed by a panel of four independent subject matter experts (from academia and a national laboratory). The peer review report and the agency's response to the peer review comments are available in Docket ID No. EPA-HQ-OAR-2014-0827.

### D. Executive Summary

#### (1) Commitment to Greenhouse Gas Emission Reductions and Vehicle Fuel Efficiency

As part of the Climate Action Plan announced in June 2013,<sup>4</sup> the President directed the Environmental Protection Agency (EPA) and the Department of Transportation's (DOT) National Highway Traffic Safety Administration (NHTSA) to set the next round of standards to reduce greenhouse gas (GHG) emissions and improve fuel efficiency for medium- and heavy-duty

vehicles. More than 70 percent of the oil used in the United States and 28 percent of GHG emissions come from the transportation sector, and since 2009 EPA and NHTSA have worked with industry and states to develop ambitious, flexible standards for both the fuel economy and GHG emissions of light-duty vehicles and the fuel efficiency and GHG emissions of heavy-duty vehicles.<sup>5 6</sup> The standards proposed here (referred to as Phase 2) would build on the light-duty vehicle standards spanning model years 2011 to 2025 and on the initial phase of standards (referred to as Phase 1) for new medium and heavy-duty vehicles (MDVs and HDVs) and engines in model years 2014 to 2018. Throughout every stage of development for these programs, EPA and NHTSA (collectively, the agencies, or "we") have worked in close partnership not only with one another, but with the vehicle manufacturing industry, environmental community leaders, and the State of California among other entities to create a single, effective set of national standards.

Through two previous rulemakings, EPA and NHTSA have worked with the auto industry to develop new fuel economy and GHG emission standards for light-duty vehicles. Taken together, the light-duty vehicle standards span model years 2011 to 2025 and are the first significant improvement in fuel economy in approximately two decades. Under the final program, average new car and light truck fuel economy is expected to double by 2025.<sup>7</sup> This is projected to save consumers \$1.7 trillion at the pump—roughly \$8,200 per vehicle for a MY2025 vehicle—reducing oil consumption by 2.2 million barrels a day in 2025 and slashing GHG emissions by 6 billion metric tons over the lifetime of the vehicles sold during this period.<sup>8</sup> These fuel economy standards are already delivering savings for American drivers. Between model years 2008 and 2013, the unadjusted average test fuel economy of new passenger cars and light trucks sold in the United States has increased by about four miles per gallon. Altogether, light-

duty vehicle fuel economy standards finalized after 2008 have already saved nearly one billion gallons of fuel and avoided more than 10 million tons of carbon dioxide emissions.<sup>9</sup>

Similarly, EPA and NHTSA have previously developed joint GHG emission and fuel efficiency standards for MDVs and HDVs. Prior to these Phase 1 standards, heavy-duty trucks and buses—from delivery vans to the largest tractor-trailers—were required to meet pollution standards for soot and smog-causing air pollutants, but no requirements existed for the fuel efficiency or carbon pollution from these vehicles.<sup>10</sup> By 2010, total fuel consumption and GHG emissions from MDVs and HDVs had been growing, and these vehicles accounted for 23 percent of total U.S. transportation-related GHG emissions.<sup>11</sup> In August 2011, the agencies finalized the groundbreaking Phase 1 standards for new MDVs and HDVs in model years 2014 through 2018. This program, developed with support from the trucking and engine industries, the State of California, Environment Canada, and leaders from the environmental community, set standards that are expected to save a projected 530 million barrels of oil and reduce carbon emissions by about 270 million metric tons, representing one of the most significant programs available to reduce domestic emissions of GHGs.<sup>12</sup> The Phase 1 program, as well as the many additional actions called for in the President's 2013 Climate Action Plan<sup>13</sup> including this Phase 2 rulemaking, not only result in meaningful decreases in GHG emissions, but support—indeed are critical for—United States leadership to encourage other countries to also achieve meaningful GHG reductions.

This proposal builds on our commitment to robust collaboration with stakeholders and the public. It follows an expansive and thorough outreach effort in which the agencies gathered input, data and views from many interested stakeholders, involving over 200 meetings with heavy-duty vehicle and engine manufacturers, technology suppliers, trucking fleets, truck drivers, dealerships, environmental organizations, and state agencies. As with the previous light-duty rules and the heavy-duty Phase 1 rule, the agencies have consulted

<sup>5</sup> The White House, Improving the Fuel Efficiency of American Trucks—Bolstering Energy Security, Cutting Carbon Pollution, Saving Money and Supporting Manufacturing Innovation (Feb. 2014), 2.

<sup>6</sup> U.S. Environmental Protection Agency. 2014. Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990–2012. EPA 430-R-14-003. Mobile sources emitted 28 percent of all U.S. GHG emissions in 2012. Available at <http://www.epa.gov/climatechange/Downloads/ghgemissions/US-GHG-Inventory-2014-Main-Text.pdf>.

<sup>7</sup> *Id.*

<sup>8</sup> *Id.*

<sup>9</sup> *Id.* at 3.

<sup>10</sup> *Id.*

<sup>11</sup> *Id.*

<sup>12</sup> *Id.* at 4.

<sup>13</sup> The President's Climate Action Plan calls for GHG-cutting actions including, for example, reducing carbon emissions from power plants and curbing hydrofluorocarbon and methane emissions.

<sup>4</sup> The White House, The President's Climate Action Plan (June, 2013). <http://www.whitehouse.gov/share/climate-action-plan>.

frequently with the California Air Resources Board staff during the development of this Phase 2 proposal, given California's unique ability among the states to adopt their own GHG standards for on-highway engines and vehicles. The agencies look forward to feedback and ongoing conversation following the release of this proposed rule from all stakeholders—including through planned public hearings, written comments, and other opportunities for input.

### *(2) Overview of Phase 1 Medium- and Heavy-Duty Vehicle Standards*

The President's direction to EPA and NHTSA to develop GHG emission and fuel efficiency standards for MDVs and HDVs resulted in the agencies' promulgation of the Phase 1 program in 2011, which covers new trucks and heavy vehicles in model years 2014 to 2018. The Phase 1 program includes specific standards for combination tractors, heavy-duty pickup trucks and vans, and vocational vehicles, and includes separate standards for both vehicles and engines. The program offers extensive flexibility, allowing manufacturers to reach standards through average fleet calculations, a mix of technologies, and the use of various credit and banking programs.

The Phase 1 program was developed through close consultation with industry and other stakeholders, resulting in standards tailored to the specifics of each different class of vehicles and engines.

- Heavy-duty combination tractors. Combination tractors—semi trucks that typically pull trailers—are regulated under nine subcategories based on weight class, cab type, and roof height. These vehicles represent approximately two-thirds of all fuel consumption and GHG emissions from MDVs and HDVs.

- Heavy-duty pickup trucks and vans. Heavy-duty pickup and van standards are based on a “work factor” attribute that combines a vehicle's payload, towing capabilities, and the presence of 4-wheel drive. These vehicles represent about 15 percent of the fuel consumption and GHG emissions from MDVs and HDVs.

- Vocational vehicles. Specialized vocational vehicles, which consist of a very wide variety of truck and bus types (e.g., delivery, refuse, utility, dump, cement, transit bus, shuttle bus, school bus, emergency vehicles, and recreational vehicles) are regulated in three subcategories based on engine classification. These vehicles represent approximately 20 percent of the fuel consumption and GHG emissions from MDVs and HDVs. The Phase 1 program

includes EPA GHG standards for recreational vehicles, but not NHTSA fuel efficiency standards.<sup>14</sup>

- Heavy-duty engines. In addition to vehicle types, the Phase 1 rule has separate standards for heavy-duty engines, to assure they contribute to the overall vehicle reductions in fuel consumption and GHG emissions.

The Phase 1 standards are premised on utilization of immediately available technologies. The Phase 1 program provides flexibilities that facilitate compliance. These flexibilities help provide sufficient lead time for manufacturers to make necessary technological improvements and reduce the overall cost of the program, without compromising overall environmental and fuel consumption objectives. The primary flexibility provisions are an engine averaging, banking, and trading (ABT) program and a vehicle ABT program. These ABT programs allow for emission and/or fuel consumption credits to be averaged, banked, or traded within each of the regulatory subcategories. However, credits are not allowed to be transferred across subcategories.

The Phase 1 program is projected to save 530 million barrels of oil and avoid 270 million metric tons of GHG emissions.<sup>15</sup> At the same time, the program is projected to produce \$50 billion in fuel savings, and net societal benefits of \$49 billion. Today, the Phase 1 fuel efficiency and GHG reduction standards are already reducing GHG emissions and U.S. oil consumption, and producing fuel savings for America's trucking industry. The market appears to be very accepting of the new technology, and the agencies have seen no evidence of “pre-buy” effects in response to the standards.

### *(3) Overview of Proposed Phase 2 Medium- and Heavy-Duty Vehicle Standards*

The Phase 2 GHG and fuel efficiency standards for MDVs and HDVs are a critical next step in improving fuel efficiency and reducing GHG. The proposed Phase 2 standards carry forward our commitment to meaningful collaboration with stakeholders and the public, as they build on more than 200 meetings with manufacturers, suppliers, trucking fleets, dealerships, state air quality agencies, non-governmental

organizations (NGOs), and other stakeholders to identify and understand the opportunities and challenges involved with this next level of fuel saving technology. These meetings have been invaluable to the agencies, enabling the development of a proposal that appropriately balances all potential impacts and effectively minimizes the possibility of unintended consequences.

Phase 2 would include technology-advancing standards that would phase in over the long-term (through model year 2027) to result in an ambitious, yet achievable program that would allow manufacturers to meet standards through a mix of different technologies at reasonable cost. The Phase 2 standards would maintain the underlying regulatory structure developed in the Phase 1 program, such as the general categorization of MDVs and HDVs and the separate standards for vehicles and engines. However, the Phase 2 program would build on and advance Phase 1 in a number of important ways including: Basing standards not only on currently available technologies but also on utilization of technologies now under development or not yet widely deployed while providing significant lead time to assure adequate time to develop, test, and phase in these controls; developing standards for trailers; further encouraging innovation and providing flexibility; including vehicles produced by small business manufacturers; incorporating enhanced test procedures that (among other things) allow individual drivetrain and powertrain performance to be reflected in the vehicle certification process; and using an expanded and improved compliance simulation model.

- Strengthening standards to account for ongoing technological advancements. Relative to the baseline as of the end of Phase 1, the proposed standards (labeled Alternative 3 or the “preferred alternative” throughout this proposal) would achieve vehicle fuel savings of up to 8 percent and 24 percent, depending on the vehicle category. While costs are higher than for Phase 1, benefits greatly exceed costs, and payback periods are short, meaning that consumers will see substantial net savings over the vehicle lifetime. Payback is estimated at about two years for tractors and trailers, about five years for vocational vehicles, and about three years for heavy-duty pickups and vans. The agencies are further proposing to phase in these MY 2027 standards with interim standards for model years 2021 and 2024 (and for certain types of trailers, EPA is proposing model year 2018 phase-in standards as well).

<sup>14</sup> The proposed Phase 2 program would also include NHTSA recreational vehicle fuel efficiency standards.

<sup>15</sup> The White House, Improving the Fuel Efficiency of American Trucks—Bolstering Energy Security, Cutting Carbon Pollution, Saving Money and Supporting Manufacturing Innovation (Feb. 2014), 4.

In addition to the proposed standards, the agencies are considering another alternative (Alternative 4), which would achieve the same performance as the proposed standards 2–3 years earlier, leading to overall reductions in fuel use and greenhouse gas emissions. The agencies believe Alternative 4 has the potential to be the maximum feasible and appropriate alternative; however, based on the evidence currently before us, EPA and NHTSA have outstanding questions regarding relative risks and benefits of Alternative 4 due to the timeframe envisioned by that alternative. The agencies are proposing Alternative 3 based on their analyses and projections, and taking into account the agencies' respective statutory considerations. The comments that the agencies receive on this proposal will be instrumental in helping us determine standards that are appropriate (for EPA) and maximum feasible (for NHTSA), given the discretion that both agencies have under our respective statutes. Therefore, the agencies have presented different options and raised specific questions throughout the proposed rule, focusing in particular on better understanding the perspectives on the feasible adoption rates of different technologies, considering associated costs and necessary lead time.

- Setting standards for trailers for the first time. In addition to retaining the vehicle and engine categories covered in

the Phase 1 program, which include semi tractors, heavy-duty pickup trucks and work vans, vocational vehicles, and separate standards for heavy-duty engines, the Phase 2 standards propose fuel efficiency and GHG emission standards for trailers used in combination with tractors. Although the agencies are not proposing standards for all trailer types, the majority of new trailers would be covered.

- Encouraging technological innovation while providing flexibility and options for manufacturers. For each category of HDVs, the standards would set performance targets that allow manufacturers to achieve reductions through a mix of different technologies and leave manufacturers free to choose any means of compliance. For tractors and vocational vehicles, enhanced test procedures and an expanded and improved compliance simulation model enable the proposed vehicle standards to encompass more of the complete vehicle and to account for engine, transmission and driveline improvements than the Phase 1 program. With the addition of the powertrain and driveline to the compliance model, representative drive cycles and vehicle baseline configurations become critically important to assure the standards promote technologies that improve real world fuel efficiency and GHG emissions. This proposal updates drive

cycles and vehicle configurations to better reflect real world operation. For tractor standards, for example, different combinations of improvements like advanced aerodynamics, engine improvements and waste-heat recovery, automated transmission, and lower rolling resistance tires and automatic tire inflation can be used to meet standards. Additionally, the agencies' analyses indicate that this proposal should have no adverse impact on vehicle or engine safety.

- Providing flexibilities to help minimize effect on small businesses. All small businesses are exempt from the Phase 1 standards. The agencies are proposing to regulate small business entities under Phase 2 (notably certain trailer manufacturers), but have conducted extensive proceedings pursuant to Section 609 of the Regulatory Flexibility Act, and otherwise have engaged in extensive consultation with stakeholders, and developed a proposed approach to provide targeted flexibilities geared toward helping small businesses comply with the Phase 2 standards. Specifically, the agencies are proposing to delay all new requirements by one year and simplify certification requirements for small businesses, and are further proposing additional specific flexibilities adapted to particular types of trailers.

#### SUMMARY OF THE PROPOSED PHASE 2 MEDIUM- AND HEAVY-DUTY VEHICLE RULE IMPACTS TO FUEL CONSUMPTION, GHG EMISSIONS, BENEFITS AND COSTS OVER THE LIFETIME OF MODEL YEARS 2018–2029, BASED ON ANALYSIS METHOD A<sup>a b c</sup>

	3%	7%
Fuel Reductions (billion gallons) .....	72–77	
GHG Reductions (MMT, CO <sub>2</sub> eq) .....	974–1034	
Pre-Tax Fuel Savings (\$billion) .....	165–175	89–94
Discounted Technology Costs (\$billion) .....	25–25.4	16.8–17.1
Value of reduced emissions (\$billion) .....	70.1–73.7	52.9–55.6
Total Costs (\$billion) .....	30.5–31.1	20.0–20.5
Total Benefits (\$billion) .....	261–276	156–165
Net Benefits (\$billion) .....	231–245	136–144

#### Notes:

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup> Range reflects two reference case assumptions, one that projects very little improvement in new vehicle fuel efficiency absent new standards, and the second that projects more significant improvements in vehicle fuel efficiency absent new standards.

<sup>c</sup> Benefits and net benefits (including those in the 7% discount rate column) use the 3 percent average SCC–CO<sub>2</sub> value applied only to CO<sub>2</sub> emissions; GHG reductions include CO<sub>2</sub>, CH<sub>4</sub>, N<sub>2</sub>O and HFC reductions.

#### SUMMARY OF THE PROPOSED PHASE 2 MEDIUM- AND HEAVY-DUTY VEHICLE ANNUAL FUEL AND GHG REDUCTIONS, PROGRAM COSTS, BENEFITS AND NET BENEFITS IN CALENDAR YEARS 2035 AND 2050, BASED ON ANALYSIS METHOD B<sup>a</sup>

	2035	2050
Fuel Reductions (Billion Gallons) .....	9.3	13.4
GHG Reduction (MMT, CO <sub>2</sub> eq) .....	127.1	183.4
Vehicle Program Costs (including Maintenance; Billions of 2012\$) .....	–\$6.0	–\$7.1
Fuel Savings (Pre-Tax; Billions of 2012\$) .....	\$37.2	\$57.5
Benefits (Billions of 2012\$) .....	\$20.5	\$32.9

**SUMMARY OF THE PROPOSED PHASE 2 MEDIUM- AND HEAVY-DUTY VEHICLE ANNUAL FUEL AND GHG REDUCTIONS, PROGRAM COSTS, BENEFITS AND NET BENEFITS IN CALENDAR YEARS 2035 AND 2050, BASED ON ANALYSIS METHOD B<sup>a</sup>—Continued**

	2035	2050
Net Benefits (Billions of 2012\$) .....	\$51.7	\$83.2

**Note:**

<sup>a</sup> Benefits and net benefits use the 3 percent average SCC-CO<sub>2</sub> value applied only to CO<sub>2</sub> emissions; GHG reductions include CO<sub>2</sub>, CH<sub>4</sub>, N<sub>2</sub>O and HFC reductions; values reflect the preferred alternative relative to the less dynamic baseline (a reference case that projects very little improvement in new vehicle fuel economy absent new standards).

**SUMMARY OF THE PROPOSED PHASE 2 MEDIUM- AND HEAVY-DUTY VEHICLE PROGRAM EXPECTED PER-VEHICLE FUEL SAVINGS, GHG EMISSION REDUCTIONS, AND COST FOR KEY VEHICLE CATEGORIES, BASED ON ANALYSIS METHOD B<sup>a</sup>**

	MY 2021	MY 2024	MY 2027
Maximum Vehicle Fuel Savings and Tailpipe GHG Reduction (%)			
Tractors .....	13	20	24
Trailers <sup>b</sup> .....	4	6	8
Vocational Vehicles .....	7	11	16
Pickups/Vans .....	2.5	10	16
Per Vehicle Cost (\$) <sup>c</sup> (% Increase in Typical Vehicle Price) <sup>d</sup>			
Tractors .....	\$6,710 (7%)	\$9,940 (10%)	\$11,680 (12%)
Trailers .....	\$900 (4%)	\$1,010 (4%)	\$1,170 (5%)
Vocational Vehicles .....	\$1,150 (2%)	\$1,770 (3%)	\$3,380 (5%)
Pickups/Vans .....	\$520 (1%)	\$950 (2%)	\$1,340 (3%)

**Notes:**

<sup>a</sup> Note that the proposed EPA standards for some categories of box trailers begin in model year 2018; values reflect the preferred alternative relative to the less dynamic baseline (a reference case that projects very little improvement in new vehicle fuel economy absent new standards).

<sup>b</sup> All engine costs are included.

<sup>c</sup> For this table, we use a minimum vehicle price today of \$100,000 for tractors, \$25,000 for trailers, \$70,000 for vocational vehicles and \$40,000 for HD pickups/vans.

**PAYBACK PERIODS FOR MY2027 VEHICLES UNDER THE PROPOSED STANDARDS, BASED ON ANALYSIS METHOD B**

[Payback occurs in the year shown; using 7% discounting]

	Proposed standards
Tractors/Trailers .....	2nd
Vocational Vehicles .....	6th
Pickups/Vans .....	3rd

**(4) Issues Addressed in This Proposed Rule**

This proposed rule contains extensive discussion of the background, elements, and implications of the proposed Phase 2 program. Section I includes information on the MDV and HDV industry, related regulatory and non-regulatory programs, summaries of Phase 1 and Phase 2 programs, costs and benefits of the proposed standards, and relevant statutory authority for EPA and NHTSA. Section II discusses vehicle simulation, engine standards, and test procedures. Sections III, IV, V, and VI detail the proposed standards for combination tractors, trailers, vocational vehicles, and heavy-duty pickup trucks and vans. Sections VII and VIII discuss

aggregate GHG impacts, fuel consumption impacts, climate impacts, and impacts on non-GHG emissions. Section IX evaluates the economic impacts of the proposed standards. Sections X, XI, and XII present the alternatives analyses, consideration of natural gas vehicles, and the agencies' initial response to recommendations from the Academy of Sciences. Finally, Sections XIII and XIV discuss the changes that the proposed Phase 2 rules would have on Phase 1 standards and other regulatory provisions. In addition to this preamble, the agencies have also prepared a joint Draft Regulatory Impact Analysis (DRIA) which is available on our respective Web sites and in the public docket for this rulemaking which provides additional data, analysis and discussion of the proposed standards and the alternatives analyzed by the agencies. We request comment on all aspects of this proposed rulemaking, including the DRIA.

**Table of Contents**

- A. Does this action apply to me?
- B. Public Participation
- C. Did EPA conduct a peer review before issuing this notice?
- D. Executive Summary
- I. Overview
  - A. Background
  - B. Summary of Phase 1 Program

- C. Summary of the Proposed Phase 2 Standards and Requirements
- D. Summary of the Costs and Benefits of the Proposed Rule
- E. EPA and NHTSA Statutory Authorities
- F. Other Issues
- II. Vehicle Simulation, Engine Standards and Test Procedures
  - A. Introduction and Summary of Phase 1 and Phase 2 Regulatory Structures
  - B. Phase 2 Proposed Regulatory Structure
  - C. Proposed Vehicle Simulation Model—Phase 2 GEM
  - D. Proposed Engine Test Procedures and Engine Standards
- III. Class 7 and 8 Combination Tractors
  - A. Summary of the Phase 1 Tractor Program
  - B. Overview of the Proposed Phase 2 Tractor Program
  - C. Proposed Phase 2 Tractor Standards
  - D. Feasibility of the Proposed Tractor Standards
  - E. Proposed Compliance Provisions for Tractors
  - F. Flexibility Provisions
- IV. Trailers
  - A. Summary of Trailer Consideration in Phase 1
  - B. The Trailer Industry
  - C. Proposed Phase 2 Trailer Standards
  - D. Feasibility of the Proposed Trailer Standards
  - E. Alternative Standards and Feasibility Considered
  - F. Trailer Standards: Compliance and Flexibilities
- V. Class 2b–8 Vocational Vehicles
  - A. Summary of Phase 1 Vocational Vehicle Standards



- B. Proposed Phase 2 Standards for Vocational Vehicles
- C. Feasibility of the Proposed Vocational Vehicle Standards
- D. Alternative Vocational Vehicle Standards Considered
- E. Compliance Provisions for Vocational Vehicles
- VI. Heavy-Duty Pickups and Vans
  - A. Introduction and Summary of Phase 1 HD Pickup and Van Standards
  - B. Proposed HD Pickup and Van Standards
  - C. Feasibility of Pickup and Van Standards
  - D. DOT CAFE Model Analysis of the Regulatory Alternatives for HD Pickups and Vans
  - E. Compliance and Flexibility for HD Pickup and Van Standards
- VII. Aggregate GHG, Fuel Consumption, and Climate Impacts
  - A. What methodologies did the agencies use to project GHG emissions and fuel consumption impacts?
  - B. Analysis of Fuel Consumption and GHG Emissions Impacts Resulting From Proposed Standards and Alternative 4
  - C. What are the projected reductions in fuel consumption and GHG emissions?
- VIII. How will this proposed action impact non-GHG emissions and their associated effects?
  - A. Emissions Inventory Impacts
  - B. Health Effects of Non-GHG Pollutants
  - C. Environmental Effects of Non-GHG Pollutants
  - D. Air Quality Impacts of Non-GHG Pollutants
- IX. Economic and Other Impacts
  - A. Conceptual Framework
  - B. Vehicle-Related Costs Associated With the Program
  - C. Changes in Fuel Consumption and Expenditures
  - D. Maintenance Expenditures
  - E. Analysis of the Rebound Effect
  - F. Impact on Class Shifting, Fleet Turnover, and Sales
  - G. Monetized GHG Impacts
  - H. Monetized Non-GHG Health Impacts
  - I. Energy Security Impacts
  - J. Other Impacts
  - K. Summary of Benefits and Costs
  - L. Employment Impacts
  - M. Cost of Ownership and Payback Analysis
  - N. Safety Impacts
- X. Analysis of the Alternatives
  - A. What are the alternatives that the agencies considered?
  - B. How do these alternatives compare in overall fuel consumption and GHG emissions reductions and in benefits and costs?
- XI. Natural Gas Vehicles and Engines
  - A. Natural Gas Engine and Vehicle Technology
  - B. GHG Lifecycle Analysis for Natural Gas Vehicles
  - C. Projected Use of LNG and CNG
  - D. Natural Gas Emission Control Measures
  - E. Dimethyl Ether
- XII. Agencies' Response to Recommendations From the National Academy of Sciences
  - A. Overview
  - B. Major Findings and Recommendations of the NAS Phase 2 First Report
- XIII. Amendments to Phase 1 Standards
  - A. EPA Amendments
  - B. Other Compliance Provisions for NHTSA
- XIV. Other Proposed Regulatory Provisions
  - A. Proposed Amendments Related to Heavy-Duty Highway Engines and Vehicles
  - B. Amendments Affecting Gliders and Glider Kits
  - C. Applying the General Compliance Provisions of 40 CFR Part 1068 to Light-Duty Vehicles, Light-Duty Trucks, Chassis-Certified Class 2B and 3 Heavy-Duty Vehicles and Highway Motorcycles
  - D. Amendments to General Compliance Provisions in 40 CFR Part 1068
  - E. Amendments to Light-Duty Greenhouse Gas Program Requirements
  - F. Amendments to Highway and Nonroad Test Procedures and Certification Requirements
  - G. Amendments Related to Nonroad Diesel Engines in 40 CFR Part 1039
  - H. Amendments Related to Marine Diesel Engines in 40 CFR Parts 1042 and 1043
  - I. Amendments Related to Locomotives in 40 CFR Part 1033
  - J. Miscellaneous EPA Amendments
  - K. Amending 49 CFR Parts 512 and 537 To Allow Electronic Submissions and Defining Data Formats for Light-Duty Vehicle Corporate Average Fuel Economy (CAFE) Reports
- XV. Statutory and Executive Order Reviews
  - A. Executive Order 12866: Regulatory Planning and Review and Executive Order 13563: Improving Regulation and Regulatory Review
  - B. National Environmental Policy Act
  - C. Paperwork Reduction Act
  - D. Regulatory Flexibility Act
  - E. Unfunded Mandates Reform Act
  - F. Executive Order 13132: Federalism
  - G. Executive Order 13175: Consultation and Coordination With Indian Tribal Governments
  - H. Executive Order 13045: Protection of Children From Environmental Health Risks and Safety Risks
  - I. Executive Order 13211: Actions Concerning Regulations That Significantly Affect Energy Supply, Distribution, or Use
  - J. National Technology Transfer and Advancement Act and 1 CFR Part 51
  - K. Executive Order 12898: Federal Actions To Address Environmental Justice in Minority Populations and Low-Income Populations
  - L. Endangered Species Act
- XVI. EPA and NHTSA Statutory Authorities
  - A. EPA
  - B. NHTSA
  - C. List of Subjects

## I. Overview

### A. Background

This background and summary of the proposed Phase 2 GHG emissions and fuel efficiency standards includes an overview of the heavy-duty truck industry and related regulatory and non-regulatory programs, a summary of the Phase 1 GHG emissions and fuel

efficiency program, a summary of the proposed Phase 2 standards and requirements, a summary of the costs and benefits of the proposed Phase 2 standards, discussion of EPA and NHTSA statutory authorities, and other issues.

For purposes of this preamble, the terms “heavy-duty” or “HD” are used to apply to all highway vehicles and engines that are not within the range of light-duty passenger cars, light-duty trucks, and medium-duty passenger vehicles (MDPV) covered by separate GHG and Corporate Average Fuel Economy (CAFE) standards.<sup>16</sup> They do not include motorcycles. Thus, in this rulemaking, unless specified otherwise, the heavy-duty category incorporates all vehicles with a gross vehicle weight rating above 8,500 lbs, and the engines that power them, except for MDPVs.<sup>17 18</sup>

Consistent with the President's direction, over the past two years as we have developed this proposal, the agencies have met on an on-going basis with a very large number of diverse stakeholders. This includes meetings, and in many cases site visits, with truck, trailer, and engine manufacturers; technology supplier companies and their trade associations (e.g., transmissions, drive lines, fuel systems, turbochargers, tires, catalysts, and many others); line haul and vocational trucking firms and trucking associations; the trucking industries owner-operator association; truck dealerships and dealers associations; trailer manufacturers and their trade association; non-governmental organizations (NGOs, including environmental NGOs, national security NGOs, and consumer advocacy NGOs); state air quality agencies; manufacturing labor unions; and many other stakeholders. In particular, NHTSA and EPA have consulted on an on-going basis with the California Air Resources Board (CARB) over the past two years as we have developed the Phase 2 proposal. In addition, CARB staff and managers have also participated with EPA and NHTSA in meetings with

<sup>16</sup> 2017 and Later Model Year Light-Duty Vehicle Greenhouse Gas Emissions and Corporate Average Fuel Economy Standards; Final Rule, 77 FR 62623, October 15, 2012.

<sup>17</sup> The CAA defines heavy-duty as a truck, bus or other motor vehicles with a gross vehicle weight rating exceeding 6,000 lbs (CAA section 202(b)(3)). The term HD as used in this action refers to a subset of these vehicles and engines.

<sup>18</sup> The Energy Independence and Security Act of 2007 requires NHTSA to set standards for commercial medium- and heavy-duty on-highway vehicles, defined as on-highway vehicles with a GVWR of 10,000 lbs or more, and work trucks, defined as vehicles with a GVWR between 8,500 and 10,000 lbs and excluding medium duty passenger vehicles.

many external stakeholders, in particular with vehicle OEMs and technology suppliers.<sup>19</sup>

NHTSA and EPA staff also participated in a large number of technical and policy conferences over the past two years related to the technological, economic, and environmental aspects of the heavy-duty trucking industry. The agencies also met with regulatory counterparts from several other nations who either have already or are considering establishing fuel consumption or GHG requirements, including outreach with representatives from the governments of Canada, the European Commission, Japan, and China.

These comprehensive outreach actions by the agencies provided us with information to assist in our identification of potential technologies that can be used to reduce heavy-duty GHG emissions and improve fuel efficiency. The outreach has also helped the agencies to identify and understand the opportunities and challenges involved with the proposed standards for the heavy-duty trucks, trailers, and

engines detailed in this preamble, including time needed for implementation of various technologies and potential costs and fuel savings. The scope of this outreach effort to gather input for the proposal included well over 200 meetings with stakeholders. These meetings and conferences have been invaluable to the agencies. We believe they have enabled us to develop this proposal in such a way as to appropriately balance all of the potential impacts, to minimize the possibility of unintended consequences, and to ensure that we are requesting comment on a wide range of issues that can inform the final rule.

(1) Brief Overview of the Heavy-Duty Truck Industry

The heavy-duty sector is diverse in several respects, including the types of manufacturing companies involved, the range of sizes of trucks and engines they produce, the types of work for which the trucks are designed, and the regulatory history of different subcategories of vehicles and engines. The current heavy-duty fleet

encompasses vehicles from the “18-wheeler” combination tractors one sees on the highway to the largest pickup trucks and vans, as well as vocational vehicles covering a range between these extremes. Together, the HD sector spans a wide range of vehicles with often specialized form and function. A primary indicator of the diversity among heavy-duty trucks is the range of load-carrying capability across the industry. The heavy-duty truck sector is often subdivided by vehicle weight classifications, as defined by the vehicle’s gross vehicle weight rating (GVWR), which is a measure of the combined curb (empty) weight and cargo carrying capacity of the truck.<sup>20</sup> Table I–1 below outlines the vehicle weight classifications commonly used for many years for a variety of purposes by businesses and by several Federal agencies, including the Department of Transportation, the Environmental Protection Agency, the Department of Commerce, and the Internal Revenue Service.

TABLE I–1—VEHICLE WEIGHT CLASSIFICATION

Class	2b	3	4	5	6	7	8
GVWR (lb) .....	8,501–10,000	10,001–14,000	14,001–16,000	16,001–19,500	19,501–26,000	26,001–33,000	>33,000

In the framework of these vehicle weight classifications, the heavy-duty truck sector refers to “Class 2b” through “Class 8” vehicles and the engines that power those vehicles.<sup>21</sup>

Unlike light-duty vehicles, which are primarily used for transporting passengers for personal travel, heavy-duty vehicles fill much more diverse operator needs. Heavy-duty pickup trucks and vans (Classes 2b and 3) are used chiefly as work trucks and vans, and as shuttle vans, as well as for personal transportation, with an average annual mileage in the range of 15,000 miles. The rest of the heavy-duty sector is used for carrying cargo and/or performing specialized tasks. “Vocational” vehicles, which may span Classes 2b through 8, vary widely in size, including smaller and larger van trucks, utility “bucket” trucks, tank trucks, refuse trucks, urban and over-the-road buses, fire trucks, flat-bed trucks, and dump trucks, among others. The annual mileage of these vehicles is

as varied as their uses, but for the most part tends to fall in between heavy-duty pickups/vans and the large combination tractors, typically from 15,000 to 150,000 miles per year.

Class 7 and 8 combination tractor-trailers—some equipped with sleeper cabs and some not—are primarily used for freight transportation. They are sold as tractors and operate with one or more trailers that can carry up to 50,000 lbs or more of payload, consuming significant quantities of fuel and producing significant amounts of GHG emissions. Together, Class 7 and 8 tractors and trailers account for approximately two-thirds of the heavy-duty sector’s total CO<sub>2</sub> emissions and fuel consumption. Trailer designs vary significantly, reflecting the wide variety of cargo types. However, the most common types of trailers are box vans (dry and refrigerated), which are a focus of this Phase 2 rulemaking. The tractor-trailers used in combination applications can and frequently do

travel more than 150,000 miles per year and can operate for 20–30 years.

EPA and NHTSA have designed our respective proposed standards in careful consideration of the diversity and complexity of the heavy-duty truck industry, as discussed in Section I.B.

(2) Related Regulatory and Non-Regulatory Programs

(a) History of EPA’s Heavy-Duty Regulatory Program and Impacts of Greenhouse Gases on Climate Change

This subsection provides an overview of the history of EPA’s heavy-duty regulatory program and impacts of greenhouse gases on climate change.

(i) History of EPA’s Heavy-Duty Regulatory Program

Since the 1980s, EPA has acted several times to address tailpipe emissions of criteria pollutants and air toxics from heavy-duty vehicles and engines. During the last two decades these programs have primarily

<sup>19</sup> Vehicle chassis manufacturers are known in this industry as original equipment manufacturers or OEMs.

<sup>20</sup> GVWR describes the maximum load that can be carried by a vehicle, including the weight of the

vehicle itself. Heavy-duty vehicles (including those designed for primary purposes other than towing) also have a gross combined weight rating (GCWR), which describes the maximum load that the vehicle can haul, including the weight of a loaded trailer and the vehicle itself.

<sup>21</sup> Class 2b vehicles manufactured as passenger vehicles (Medium Duty Passenger Vehicles, MDPVs) are covered by the light-duty GHG and fuel economy standards and therefore are not addressed in this rulemaking.

addressed emissions of particulate matter (PM) and the primary ozone precursors, hydrocarbons (HC) and oxides of nitrogen (NO<sub>x</sub>). These programs, which have successfully achieved significant and cost-effective reductions in emissions and associated health and welfare benefits to the nation, were an important basis of the Phase 1 program. See *e.g.* 66 FR 5002, 5008, and 5011–5012 (January 18, 2001) (detailing substantial public health benefits of controls of criteria pollutants from heavy-duty diesel engines, including bringing areas into attainment with primary (public health) PM NAAQS, or contributing substantially to such attainment); *National Petrochemical Refiners Association v. EPA*, 287 F.3d 1130, 1134 (D.C. Cir. 2002) (referring to the “dramatic reductions” in criteria pollutant emissions resulting from those on-highway heavy-duty engine standards, and upholding all of the standards).

As required by the Clean Air Act (CAA), the emission standards implemented by these programs include standards that apply at the time that the vehicle or engine is sold and continue to apply in actual use. EPA’s overall program goal has always been to achieve emissions reductions from the complete vehicles that operate on our roads. The agency has often accomplished this goal for many heavy-duty truck categories by regulating heavy-duty engine emissions. A key part of this success has been the development over many years of a well-established, representative, and robust set of engine test procedures that industry and EPA now use routinely to measure emissions and determine compliance with emission standards. These test procedures in turn serve the overall compliance program that EPA implements to help ensure that emissions reductions are being achieved. By isolating the engine from the many variables involved when the engine is installed and operated in a HD vehicle, EPA has been able to accurately address the contribution of the engine alone to overall emissions.

#### (ii) Impacts of Greenhouse Gases on Climate Change

In 2009, the EPA Administrator issued the document known as the Endangerment Finding under CAA Section 202(a)(1).<sup>22</sup> In the Endangerment Finding, which focused on public health and public welfare impacts within the United States, the

Administrator found that elevated concentrations of GHG emissions in the atmosphere may reasonably be anticipated to endanger public health and welfare of current and future generations. See also *Coalition for Responsible Regulation v. EPA*, 684 F.3d 102, 117–123 (D.C. Cir. 2012) (upholding the endangerment finding in all respects). The following sections summarize the key information included in the Endangerment Finding.

Climate change caused by human emissions of GHGs threatens public health in multiple ways. By raising average temperatures, climate change increases the likelihood of heat waves, which are associated with increased deaths and illnesses. While climate change also increases the likelihood of reductions in cold-related mortality, evidence indicates that the increases in heat mortality will be larger than the decreases in cold mortality in the United States. Compared to a future without climate change, climate change is expected to increase ozone pollution over broad areas of the U.S., including in the largest metropolitan areas with the worst ozone problems, and thereby increase the risk of morbidity and mortality. Other public health threats also stem from projected increases in intensity or frequency of extreme weather associated with climate change, such as increased hurricane intensity, increased frequency of intense storms and heavy precipitation. Increased coastal storms and storm surges due to rising sea levels are expected to cause increased drownings and other adverse health impacts. Children, the elderly, and the poor are among the most vulnerable to these climate-related health effects. See also 79 FR 75242 (December 17, 2014) (climate change, and temperature increases in particular, likely to increase O<sub>3</sub> (Ozone) pollution “over broad areas of the U.S., including the largest metropolitan areas with the worst O<sub>3</sub> problems, increas[ing] the risk of morbidity and mortality”).

Climate change caused by human emissions of GHGs also threatens public welfare in multiple ways. Climate changes are expected to place large areas of the country at serious risk of reduced water supplies, increased water pollution, and increased occurrence of extreme events such as floods and droughts. Coastal areas are expected to face increased risks from storm and flooding damage to property, as well as adverse impacts from rising sea level, such as land loss due to inundation, erosion, wetland submergence and habitat loss. Climate change is expected to result in an increase in peak electricity demand, and extreme

weather from climate change threatens energy, transportation, and water resource infrastructure. Climate change may exacerbate ongoing environmental pressures in certain settlements, particularly in Alaskan indigenous communities. Climate change also is very likely to fundamentally rearrange U.S. ecosystems over the 21st century. Though some benefits may balance adverse effects on agriculture and forestry in the next few decades, the body of evidence points towards increasing risks of net adverse impacts on U.S. food production, agriculture and forest productivity as temperature continues to rise. These impacts are global and may exacerbate problems outside the U.S. that raise humanitarian, trade, and national security issues for the U.S. See also 79 FR 75382 (December 17, 2014) (welfare effects of O<sub>3</sub> increases due to climate change, with emphasis on increased wildfires).

As outlined in Section VIII.A. of the 2009 Endangerment Finding, EPA’s approach to providing the technical and scientific information to inform the Administrator’s judgment regarding the question of whether GHGs endanger public health and welfare was to rely primarily upon the recent, major assessments by the U.S. Global Change Research Program (USGCRP), the Intergovernmental Panel on Climate Change (IPCC), and the National Research Council (NRC) of the National Academies. These assessments addressed the scientific issues that EPA was required to examine, were comprehensive in their coverage of the GHG and climate change issues, and underwent rigorous and exacting peer review by the expert community, as well as rigorous levels of U.S. government review. Since the administrative record concerning the Endangerment Finding closed following EPA’s 2010 Reconsideration Denial, a number of such assessments have been released. These assessments include the IPCC’s 2012 “Special Report on Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation” (SREX) and the 2013–2014 Fifth Assessment Report (AR5), the USGCRP’s 2014 “Climate Change Impacts in the United States” (Climate Change Impacts), and the NRC’s 2010 “Ocean Acidification: A National Strategy to Meet the Challenges of a Changing Ocean” (Ocean Acidification), 2011 “Report on Climate Stabilization Targets: Emissions, Concentrations, and Impacts over Decades to Millennia” (Climate Stabilization Targets), 2011 “National Security Implications for U.S. Naval

<sup>22</sup> “Endangerment and Cause or Contribute Findings for Greenhouse Gases Under Section 202(a) of the Clean Air Act,” 74 FR 66496 (December 15, 2009) (“Endangerment Finding”).

Forces” (National Security Implications), 2011 “Understanding Earth’s Deep Past: Lessons for Our Climate Future” (Understanding Earth’s Deep Past), 2012 “Sea Level Rise for the Coasts of California, Oregon, and Washington: Past, Present, and Future”, 2012 “Climate and Social Stress: Implications for Security Analysis” (Climate and Social Stress), and 2013 “Abrupt Impacts of Climate Change” (Abrupt Impacts) assessments.

EPA has reviewed these new assessments and finds that the improved understanding of the climate system they present strengthens the case that GHG emissions endanger public health and welfare.

In addition, these assessments highlight the urgency of the situation as the concentration of CO<sub>2</sub> in the atmosphere continues to rise. Absent a reduction in emissions, a recent National Research Council of the National Academies assessment projected that concentrations by the end of the century would increase to levels that the Earth has not experienced for millions of years.<sup>23</sup> In fact, that assessment stated that “the magnitude and rate of the present greenhouse gas increase place the climate system in what could be one of the most severe increases in radiative forcing of the global climate system in Earth history.”<sup>24</sup> What this means, as stated in another NRC assessment, is that:

Emissions of carbon dioxide from the burning of fossil fuels have ushered in a new epoch where human activities will largely determine the evolution of Earth’s climate. Because carbon dioxide in the atmosphere is long lived, it can effectively lock Earth and future generations into a range of impacts, some of which could become very severe. Therefore, emission reductions choices made today matter in determining impacts experienced not just over the next few decades, but in the coming centuries and millennia.<sup>25</sup>

Moreover, due to the time-lags inherent in the Earth’s climate, the Climate Stabilization Targets assessment notes that the full warming from any given concentration of CO<sub>2</sub> reached will not be realized for several centuries.

The recently released USGCRP “National Climate Assessment”<sup>26</sup> emphasizes that climate change is already happening now and it is happening in the United States. The

assessment documents the increases in some extreme weather and climate events in recent decades, the damage and disruption to infrastructure and agriculture, and projects continued increases in impacts across a wide range of peoples, sectors, and ecosystems.

These assessments underscore the urgency of reducing emissions now: Today’s emissions will otherwise lead to raised atmospheric concentrations for thousands of years, and raised Earth system temperatures for even longer. Emission reductions today will benefit the public health and public welfare of current and future generations.

Finally, it should be noted that the concentration of carbon dioxide in the atmosphere continues to rise dramatically. In 2009, the year of the Endangerment Finding, the average concentration of carbon dioxide as measured on top of Mauna Loa was 387 parts per million.<sup>27</sup> The average concentration in 2013 was 396 parts per million. And the monthly concentration in April of 2014 was 401 parts per million, the first time a monthly average has exceeded 400 parts per million since record keeping began at Mauna Loa in 1958, and for at least the past 800,000 years according to ice core records.<sup>28</sup>

#### (b) The NHTSA and EPA Light-Duty National GHG and Fuel Economy Program

On May 7, 2010, EPA and NHTSA finalized the first-ever National Program for light-duty cars and trucks, which set GHG emissions and fuel economy standards for model years 2012–2016 (see 75 FR 25324). More recently, the agencies adopted even stricter standards for model years 2017 and later (77 FR 62624, October 15, 2012). The agencies have used the light-duty National Program as a model for the HD National Program in several respects. This is most apparent in the case of heavy-duty pickups and vans, which are similar to the light-duty trucks addressed in the light-duty National Program both technologically as well as in terms of how they are manufactured (*i.e.*, the same company often makes both the vehicle and the engine, and several light-duty manufacturers also manufacture HD pickups and vans).<sup>29</sup> For HD pickups and vans, there are

close parallels to the light-duty program in how the agencies have developed our respective heavy-duty standards and compliance structures. However, HD pickups and vans are true work vehicles that are designed for much higher towing and payload capabilities than are light-duty pickups and vans. The technologies applied to light-duty trucks are not all applicable to heavy-duty pickups and vans at the same adoption rates, and the technologies often produce a lower percent reduction in CO<sub>2</sub> emissions and fuel consumption when used in heavy-duty vehicles. Another difference between the light-duty and the heavy-duty standards is that each agency adopts heavy-duty standards based on attributes other than vehicle footprint, as discussed below.

Due to the diversity of the remaining HD vehicles, there are fewer parallels with the structure of the light-duty program. However, the agencies have maintained the same collaboration and coordination that characterized the development of the light-duty program throughout the Phase 1 rulemaking and the continued efforts for Phase 2. Most notably, as with the light-duty program, manufacturers would continue to be able to design and build vehicles to meet a closely coordinated, harmonized national program, and to avoid unnecessarily duplicative testing and compliance burdens. In addition, the averaging, banking, and trading provisions in the HD program, although structurally different from those of the light-duty program, serve the same purpose, which is to allow manufacturers to achieve large reductions in fuel consumption and emissions while providing a broad mix of products to their customers. The agencies have also worked closely with CARB to provide harmonized national standards.

#### (c) EPA’s SmartWay Program

EPA’s voluntary SmartWay Transport Partnership program encourages businesses to take actions that reduce fuel consumption and CO<sub>2</sub> emissions while cutting costs by working with the shipping, logistics, and carrier communities to identify low carbon strategies and technologies across their transportation supply chains. SmartWay provides technical information, benchmarking and tracking tools, market incentives, and partner recognition to facilitate and accelerate the adoption of these strategies. Through the SmartWay program and its related technology assessment center, EPA has worked closely with truck and trailer manufacturers and truck fleets over the last ten years to develop test

<sup>23</sup> National Research Council, Understanding Earth’s Deep Past, p. 1

<sup>24</sup> *Id.*, p. 138.

<sup>25</sup> National Research Council, Climate Stabilization Targets, p. 3.

<sup>26</sup> U.S. Global Change Research Program, Climate Change Impacts in the United States: The Third National Climate Assessment, May 2014 Available at <http://nca2014.globalchange.gov/>.

<sup>27</sup> [ftp://ftp.cmdl.noaa.gov/products/trends/co2/co2\\_annmean\\_mlo.txt](ftp://ftp.cmdl.noaa.gov/products/trends/co2/co2_annmean_mlo.txt).

<sup>28</sup> <http://www.esrl.noaa.gov/gmd/ccgg/trends/>.

<sup>29</sup> This is more broadly true for heavy-duty pickup trucks than vans because every manufacturer of heavy-duty pickup trucks also makes light-duty pickup trucks, while only some heavy-duty van manufacturers also make light-duty vans.

procedures to evaluate vehicle and component performance in reducing fuel consumption and has conducted testing and has established test programs to verify technologies that can achieve these reductions. SmartWay partners have demonstrated these new and emerging technologies in their business operations, adding to the body of technical data and information that EPA can disseminate to industry, researchers and other stakeholders. Over the last several years, EPA has developed hands-on experience testing the largest heavy-duty trucks and trailers and evaluating improvements in tire and vehicle aerodynamic performance. In developing the Phase 1 program, the agencies drew from this testing and from the SmartWay experience. In the same way, the agencies benefitted from SmartWay in developing the proposed Phase 2 trailer program.

#### (d) The State of California

California has established ambitious goals for reducing GHG emissions from heavy-duty vehicles and engines as part of an overall plan to reduce GHG emissions from the transportation sector in California.<sup>30</sup> Heavy-duty vehicles are responsible for one-fifth of the total GHG emissions from transportation sources in California. In the past several years the California Air Resources Board (CARB) has taken a number of actions to reduce GHG emissions from heavy-duty vehicles and engines. For example, in 2008, the CARB adopted regulations to reduce GHG emissions from heavy-duty tractors that pull box-type trailers through improvements in tractor and trailer aerodynamics and the use of low rolling resistance tires.<sup>31</sup> The tractors and trailers subject to the CARB regulation are required to use SmartWay certified tractors and trailers, or retrofit their existing fleet with SmartWay verified technologies, consistent with California's state authority to regulate both new and in-use vehicles. Recently, in December 2013, CARB adopted regulations that establish its own parallel Phase 1 program with standards consistent with EPA Phase 1 standards. On December 5, 2014, California's Office of Administrative Law approved CARB's adoption of the Phase 1

standards, with an effective date of December 5, 2014.<sup>32</sup> Complementary to its regulatory efforts, CARB and other California agencies are investing significant public capital through various incentive programs to accelerate fleet turnover and stimulate technology innovation within the heavy-duty vehicle market (e.g., Air Quality Improvement, Carl Moyer, Loan Incentives, Lower-Emission School Bus and Goods Movement Emission Reduction Programs).<sup>33</sup> And, recently, California Governor Jerry Brown established a target of up to 50 percent petroleum reduction by 2030.

In addition to California's efforts to reduce GHG emissions that contribute to climate change, California also faces unique air quality challenges as compared to many other regions of the United States. Many areas of the state are classified as non-attainment for both the ozone and particulate matter National Ambient Air Quality Standards (NAAQS) with California having the nation's only two "Extreme" ozone non-attainment airsheds (the San Joaquin Valley and South Coast Air Basins).<sup>34</sup> By 2016, California must submit to EPA its Clean Air Act State Implementation Plans (SIPs) that demonstrate how the 2008 ozone and 2006 PM<sub>2.5</sub> NAAQS will be met by Clean Air Act deadlines. Extreme ozone areas must attain the 2008 ozone NAAQS by no later than 2032 and PM<sub>2.5</sub> moderate areas must attain the 2006 PM<sub>2.5</sub> standard by 2021 or, if reclassified to serious, by 2025.

Heavy-duty vehicles are responsible today for one-third of the state's oxides of nitrogen (NO<sub>x</sub>) emissions. California has estimated that the state's South Coast Air Basin will need nearly a 90 percent reduction in heavy-duty vehicle NO<sub>x</sub> emissions by 2032 from 2010 levels to attain the 2008 NAAQS for ozone. Additionally, on November 25, 2014, EPA issued a proposal to strengthen the ozone NAAQS. If a change to the ozone NAAQS is finalized, California and other areas of the country will need to identify and implement measures to reduce NO<sub>x</sub> as needed to complement Federal emission reduction measures. While this section

is focused on California's regulatory programs and air quality needs, EPA recognizes that other states and local areas are concerned about the challenges of reducing NO<sub>x</sub> and attaining, as well as maintaining, the ozone NAAQS (further discussed in Section VIII.D.1 below).

In order to encourage the use of lower NO<sub>x</sub> emitting new heavy-duty vehicles in California, in 2013 CARB adopted a voluntary low NO<sub>x</sub> emission standard for heavy-duty engines.<sup>35</sup> In addition, in 2013 CARB awarded a major new research contract to Southwest Research Institute to investigate advanced technologies that could reduce heavy-duty vehicle NO<sub>x</sub> emissions well below the current EPA and CARB standards.

California has long had the unique ability among states to adopt its own separate new motor vehicle standards per Section 209 of the Clean Air Act (CAA). Although section 209(a) of the CAA expressly preempts states from adopting and enforcing standards relating to the control of emissions from new motor vehicles or new motor vehicle engines (such as state controls for new heavy-duty engines and vehicles) CAA section 209(b) directs EPA to waive this preemption under certain conditions. Under the waiver process set out in CAA Section 209(b), EPA has granted CARB a waiver for its initial heavy-duty vehicle GHG regulation.<sup>36</sup> Even with California's ability under the CAA to establish its own emission standards, EPA and CARB have worked closely together over the past several decades to largely harmonize new vehicle criteria pollutant standard programs for heavy-duty engines and heavy-duty vehicles. In the past several years EPA and NHTSA also consulted with CARB in the development of the Federal light-duty vehicle GHG and CAFE rulemakings for the 2012–2016 and 2017–2025 model years.

As discussed above, California operates under state authority to establish its own new heavy-duty vehicle and engine emission standards, including standards for CO<sub>2</sub>, methane, N<sub>2</sub>O, and hydrofluorocarbons. EPA recognizes this independent authority, and we also recognize the potential

<sup>32</sup> See <http://www.arb.ca.gov/regact/2013/hdghg2013/hdghg2013.htm> for details regarding CARB's adoption of the Phase 1 standards.

<sup>33</sup> See <http://www.arb.ca.gov/ba/fininfo.htm> for detailed descriptions of CARB's mobile source incentive programs. Note that EPA works to support CARB's heavy-duty incentive programs through the West Coast Collaborative (<http://westcoastcollaborative.org/>) and the Clean Air Technology Initiative (<http://www.epa.gov/region09/cleantech/>).

<sup>34</sup> See <http://www.epa.gov/airquality/greenbk/index.html> for more information on EPA's nonattainment designations.

<sup>35</sup> See <http://www.arb.ca.gov/regact/2013/hdghg2013/hdghg2013.htm> for a description of the CARB optional reduced NO<sub>x</sub> emission standards for on-road heavy-duty engines.

<sup>36</sup> See EPA's waiver of CARB's heavy-duty tractor-trailer greenhouse gas regulation applicable to new 2011 through 2013 model year Class 8 tractors equipped with integrated sleeper berths (sleeper-cab tractors) and 2011 and subsequent model year dry-can and refrigerated-van trailers that are pulled by such tractors on California highways at 79 FR 46256 (August 7, 2014).

<sup>30</sup> See <http://www.arb.ca.gov/cc/cc.htm> for details on the California Air Resources Board climate change actions, including a discussion of Assembly Bill 32, and the Climate Change Scoping Plan developed by CARB, which includes details regarding CARB's future goals for reducing GHG emissions from heavy-duty vehicles.

<sup>31</sup> See <http://www.arb.ca.gov/msprog/truckstop/trailers/trailers.htm> for a summary of CARB's "Tractor-Trailer Greenhouse Gas Regulation".

benefits for the regulated industry if the Federal Phase 2 standards could result in a single, National Program that would meet the NHTSA and EPA's statutory requirements to set appropriate and maximum feasible standards, and also be equivalent to potential future new heavy-duty vehicle and engine GHG standards established by CARB (addressing the same model years as addressed by the final Federal Phase 2 program and requiring the same technologies).

Similarly, CARB has expressed support in the past for a Federal heavy-duty Phase 2 program that would produce significant GHG reductions both at the Federal level and in California that could enable CARB to adopt the same standards at the state level. This is similar to CARB's approach for the Federal heavy-duty Phase 1 program, and with past EPA criteria pollutant standards for heavy-duty vehicles and engines. In order to further the opportunity for maintaining coordinated Federal and California standards in the Phase 2 timeframe (as well as to benefit from different technical expertise and perspective), NHTSA and EPA have consulted on an on-going basis with CARB over the past two years as we have developed the Phase 2 proposal. The agencies' technical staff have shared information on technology cost, technology effectiveness, and feasibility with the CARB staff. We have also received information from CARB on these same topics. EPA and NHTSA have also shared preliminary results from several of our modeling exercises with CARB as we examined different potential levels of stringency for the Phase 2 program. In addition, CARB staff and managers have also participated with EPA and NHTSA in meetings with many external stakeholders, in particular with vehicle OEMs and technology suppliers.

In addition to information on GHG emissions, CARB has also kept EPA and NHTSA informed of the state's need to consider opportunities for additional NO<sub>x</sub> emission reductions from heavy-duty vehicles. CARB has asked the agencies to consider opportunities in the Heavy-Duty Phase 2 rulemaking to encourage or incentivize further NO<sub>x</sub> emission reductions, in addition to the petroleum and GHG reductions which would come from the Phase 2 standards. When combined with the Phase 1 standards, the technologies the agencies are projecting to be used to meet the proposed GHG emission and fuel efficiency standards would be expected to reduce NO<sub>x</sub> emissions by over 450,000 tons in 2050 (see Section VIII).

EPA and NHTSA believe that through this information sharing and dialog we will enhance the potential for the Phase 2 program to result in a National Program that can be adopted not only by the Federal agencies, but also by the State of California, given the strong interest from the regulated industry for a harmonized State and Federal program.

The agencies will continue to seek input from CARB, and from all stakeholders, throughout this rulemaking.

#### (e) Environment Canada

On March 13, 2013, Environment Canada (EPA's Canadian counterpart) published its own regulations to control GHG emissions from heavy-duty vehicles and engines, beginning with MY 2014. These regulations are closely aligned with EPA's Phase 1 program to achieve a common set of North American standards. Environment Canada has expressed its intention to amend these regulations to further limit emissions of greenhouse gases from new on-road heavy-duty vehicles and their engines for post-2018 MYs. As with the development of the current regulations, Environment Canada is committed to continuing to work closely with EPA to maintain a common Canada-United States approach to regulating GHG emissions for post-2018 MY vehicles and engines. This approach will build on the long history of regulatory alignment between the two countries on vehicle emissions pursuant to the Canada-United States Air Quality Agreement.<sup>37</sup> Environment Canada has also been of great assistance during the development of this Phase 2 proposal. In particular, Environment Canada supported aerodynamic testing, and conducted chassis dynamometer emissions testing.

#### (f) Recommendations of the National Academy of Sciences

In April 2010 as mandated by Congress in the Energy Independence and Security Act of 2007 (EISA), the National Research Council (NRC) under the National Academy of Sciences (NAS) issued a report to NHTSA and to Congress evaluating medium- and heavy-duty truck fuel efficiency improvement opportunities, titled "Technologies and Approaches to Reducing the Fuel Consumption of Medium- and Heavy-duty Vehicles." That NAS report was far reaching in its review of the technologies that were available and that might become

available in the future to reduce fuel consumption from medium- and heavy-duty vehicles. In presenting the full range of technical opportunities, the report included technologies that may not be available until 2020 or even further into the future. The report provided not only a valuable list of off the shelf technologies from which the agencies drew in developing the Phase 1 program, but also provided useful information the agencies have considered when developing this second phase of regulations.

In April 2014, the NAS issued another report: "Reducing the Fuel Consumption and Greenhouse Gas Emissions of Medium and Heavy-Duty Vehicles, Phase Two, First Report." This study outlines a number of recommendations to the U.S. Department of Transportation and NHTSA on technical and policy matters to consider when addressing the fuel efficiency of our nation's medium- and heavy-duty vehicles. In particular, this report provided recommendations with respect to:

- The Greenhouse Gas Emission Model (GEM) simulation tool used by the agencies to assess compliance with vehicle standards
- Regulation of trailers
- Natural gas-fueled engines and vehicles
- Data collection on in-use operation

As described in Sections II, IV, and XII, the agencies are proposing to incorporate many of these recommendations into this proposed Phase 2 program, especially those recommendations relating to the GEM simulation tool and to trailers.

#### B. Summary of Phase 1 Program

##### (1) EPA Phase 1 GHG Emission Standards and NHTSA Phase 1 Fuel Consumption Standards

The EPA Phase 1 GHG mandatory standards commenced in MY 2014 and include increased stringency for standards applicable to MY 2017 and later MY vehicles and engines. NHTSA's fuel consumption standards are voluntary for MYs 2014 and 2015, due to lead time requirements in EISA, and apply on a mandatory basis thereafter. They also increase in stringency for MY 2017. Both agencies have allowed voluntary early compliance starting in MY 2013 and encouraged manufacturers' participation through credit incentives.

Given the complexity of the heavy-duty industry, the agencies divided the industry into three discrete categories for purposes of setting our respective Phase 1 standards—combination

<sup>37</sup> [http://www.ijc.org/en\\_/Air\\_Quality\\_Agreement](http://www.ijc.org/en_/Air_Quality_Agreement).

tractors, heavy-duty pickups and vans, and vocational vehicles—based on the relative degree of homogeneity among trucks within each category. The Phase 1 rule also include separate standards for the engines that power combination tractors and vocational vehicles. For each regulatory category, the agencies adopted related but distinct program approaches reflecting the specific challenges in these segments. In the following paragraphs, we summarize briefly EPA's final GHG emission standards and NHTSA's final fuel consumption standards for the three regulatory categories of heavy-duty vehicles and for the engines powering vocational vehicles and tractors. See Sections III, V, and VI for additional details on the Phase 1 standards. To respect differences in design and typical uses that drive different technology solutions, the agencies segmented each regulatory class into subcategories. The category-specific structure enabled the agencies to set standards that appropriately reflect the technology available for each regulatory subcategory of vehicles and the engines for use in each type of vehicle. The Phase 1 program also provided several flexibilities, as summarized in Section I.B(3).

The agencies are proposing to base the Phase 2 standards on test procedures that differ from those used for Phase 1, including the revised GEM simulation tool. Significant revisions to GEM are discussed in Section II and the draft RIA Chapter 4, and other test procedures are discussed further in the draft RIA Chapter 3. It is important to note that due to these test procedure changes, the Phase 1 standards and the proposed Phase 2 standards are not directly comparable in an absolute sense. In particular, the proposed revisions to the 55 mph and 65 mph highway cruise cycles for tractors and vocational vehicles have the effect of making the cycles more challenging (albeit more representative of actual driving conditions). We are not proposing to apply these revisions to the Phase 1 program because doing so would significantly change the stringency of the Phase 1 standards, for which manufacturers have already developed engineering plans and are now producing products to meet. Moreover, the agencies intend such changes to address a broader range of technologies not part of the projected compliance path for use in Phase 1.

#### (a) Class 7 and 8 Combination Tractors

Class 7 and 8 combination tractors and their engines contribute the largest portion of the total GHG emissions and

fuel consumption of the heavy-duty sector, approximately two-thirds, due to their large payloads, their high annual miles traveled, and their major role in national freight transport. These vehicles consist of a cab and engine (tractor or combination tractor) and a detachable trailer. The primary manufacturers of combination tractors in the United States are Daimler Trucks North America, Navistar, Volvo/Mack, and PACCAR. Each of the tractor manufacturers and Cummins (an independent engine manufacturer) also produce heavy-duty engines used in tractors. The Phase 1 standards require manufacturers to reduce GHG emissions and fuel consumption for these vehicles and engines, which we expect them to do through improvements in aerodynamics and tires, reductions in tractor weight, reduction in idle operation, as well as engine-based efficiency improvements.<sup>38</sup>

The Phase 1 tractor standards differ depending on gross vehicle weight rating (GVWR) (*i.e.*, whether the truck is Class 7 or Class 8), the height of the roof of the cab, and whether it is a “day cab” or a “sleeper cab.” The agencies created nine subcategories within the Class 7 and 8 combination tractor category reflecting combinations of these attributes. The agencies set Phase 1 standards for each of these subcategories beginning in MY 2014, with more stringent standards following in MY 2017. The standards represent an overall fuel consumption and CO<sub>2</sub> emissions reduction up to 23 percent from the tractors and the engines installed in them when compared to a baseline MY 2010 tractor and engine.

For Phase 1, manufacturers demonstrate compliance with the tractor CO<sub>2</sub> and fuel consumption standards using a vehicle simulation tool described in Section II. The tractor inputs to the simulation tool in Phase 1 are the aerodynamic performance, tire rolling resistance, vehicle speed limiter, automatic engine shutdown, and weight reduction. The agencies have verified, through our own confirmatory testing, that the values inputs into the model by manufacturers are generally correct. Prior to and after adopting the Phase 1 standards, the agencies worked with manufacturers to minimize impacts of this process on their normal business practices.

<sup>38</sup> We note although the standards' stringency is predicated on use of certain technologies, and the agencies' assessed the cost of the rule based on the cost of use of those technologies, the standards can be met by any means. Put another way, the rules create a performance standard, and do not mandate any particular means of achieving that level of performance.

In addition to the final Phase 1 tractor-based standards for CO<sub>2</sub>, EPA adopted a separate standard to reduce leakage of hydrofluorocarbon (HFC) refrigerant from cabin air conditioning (A/C) systems from combination tractors, to apply to the tractor manufacturer. This HFC leakage standard is independent of the CO<sub>2</sub> tractor standard. Manufacturers can choose technologies from a menu of leak-reducing technologies sufficient to comply with the standard, as opposed to using a test to measure performance. Given that HFC leakage does not relate to fuel efficiency, NHTSA did not adopt corresponding HFC standards.

#### (b) Heavy-Duty Pickup Trucks and Vans (Class 2b and 3)

Heavy-duty vehicles with a GVWR between 8,501 and 10,000 lb are classified as Class 2b motor vehicles. Heavy-duty vehicles with a GVWR between 10,001 and 14,000 lb are classified as Class 3 motor vehicles. Class 2b and Class 3 heavy-duty vehicles (referred to in these rules as “HD pickups and vans”) together emit about 15 percent of today's GHG emissions from the heavy-duty vehicle sector.<sup>39</sup>

The majority of HD pickups and vans are ¾-ton and 1-ton pickup trucks, 12- and 15-passenger vans,<sup>40</sup> and large work vans that are sold by vehicle manufacturers as complete vehicles, with no secondary manufacturer making substantial modifications prior to registration and use. These vehicles can also be sold as cab-complete vehicles (*i.e.*, incomplete vehicles that include complete or nearly complete cabs that are sold to secondary manufacturers). The majority of heavy-duty pickups and vans are produced by companies with major light-duty markets in the United States. Furthermore, the technologies available to reduce fuel consumption and GHG emissions from this segment are similar to the technologies used on light-duty pickup trucks, including both engine efficiency improvements (for gasoline and diesel engines) and vehicle efficiency improvements. For these reasons, EPA and NHTSA concluded that it was appropriate to adopt GHG standards, expressed as grams per mile, and fuel consumption standards, expressed as gallons per 100 miles, for HD pickups and vans based on the whole vehicle (including the engine), consistent with the way these vehicles

<sup>39</sup> EPA MOVES Model, <http://www.epa.gov/otaq/models/moves/index.htm>.

<sup>40</sup> Note that 12-passenger vans are subject to the light-duty standards as medium-duty passenger vehicles (MDPVs) and are not subject to this proposal.



have been regulated by EPA for criteria pollutants and also consistent with the way their light-duty counterpart vehicles are regulated by NHTSA and EPA. This complete vehicle approach adopted by both agencies for HD pickups and vans was consistent with the recommendations of the NAS Committee in its 2010 Report.

For the light-duty GHG and fuel economy standards, the agencies based the emissions and fuel economy targets on vehicle footprint (the wheelbase times the average track width). For those standards, passenger cars and light trucks with larger footprints are assigned higher GHG and lower fuel economy target levels reflecting their inherent tendency to consume more fuel and emit more GHGs per mile. For HD pickups and vans, the agencies believe that setting standards based on vehicle attributes is appropriate, but have found that a work-based metric would be a more appropriate attribute than the footprint attribute utilized in the light-duty vehicle rulemaking, given that work-based measures such as towing and payload capacities are critical elements of these vehicles' functionality. EPA and NHTSA therefore adopted standards for HD pickups and vans based on a "work factor" attribute that combines their payload and towing capabilities, with an added adjustment for 4-wheel drive vehicles.

Each manufacturer's fleet average Phase 1 standard is based on production volume-weighting of target standards for all vehicles, which in turn are based on each vehicle's work factor. These target standards are taken from a set of curves (mathematical functions), with separate curves for gasoline and diesel.<sup>41</sup> However, both gasoline and diesel vehicles in this category are included in a single averaging set. EPA phased in the CO<sub>2</sub> standards gradually starting in the 2014 MY, at 15–20–40–60–100 percent of the MY 2018 standards stringency level in MYs 2014–2015–2016–2017–2018, respectively. The phase-in takes the form of a set of target curves, with increasing stringency in each MY.

NHTSA allowed manufacturers to select one of two fuel consumption standard alternatives for MYs 2016 and later. The first alternative defined individual gasoline vehicle and diesel vehicle fuel consumption target curves that will not change for MYs 2016–2018, and are equivalent to EPA's 67–67–67–

100 percent target curves in MYs 2016–2017–2018–2019, respectively. The second alternative defined target curves that are equivalent to EPA's 40–60–100 percent target curves in MYs 2016–2017–2018, respectively. NHTSA allowed manufacturers to opt voluntarily into the NHTSA HD pickup and van program in MYs 2014 or 2015 at target curves equivalent to EPA's target curves. If a manufacturer chose to opt in for one category, they would be required to opt in for all categories. In other words a manufacturer would be unable to opt in for Class 2b vehicles, but opt out for Class 3 vehicles.

EPA also adopted an alternative phase-in schedule for manufacturers wanting to have stable standards for model years 2016–2018. The standards for heavy-duty pickups and vans, like those for light-duty vehicles, are expressed as set of target standard curves, with increasing stringency in each model year. The final EPA standards for 2018 (including a separate standard to control air conditioning system leakage) represent an average per-vehicle reduction in GHG emissions of 17 percent for diesel vehicles and 12 percent for gasoline vehicles (relative to pre-control baseline vehicles). The NHTSA standard will require these vehicles to achieve up to about 15 percent reduction in fuel consumption and greenhouse gas emissions by MY 2018 (relative to pre-control baseline vehicles). Manufacturers demonstrate compliance based on entire vehicle chassis certification using the same duty cycles used to demonstrate compliance with criteria pollutant standards.

#### (c) Class 2b–8 Vocational Vehicles

Class 2b–8 vocational vehicles include a wide variety of vehicle types, and serve a vast range of functions. Some examples include service for urban delivery, refuse hauling, utility service, dump, concrete mixing, transit service, shuttle service, school bus, emergency, motor homes, and tow trucks. In Phase 1, we defined Class 2b–8 vocational vehicles as all heavy-duty vehicles that are not included in either the heavy-duty pickup and van category or the Class 7 and 8 tractor category. EPA's and NHTSA's Phase 1 standards for this vocational vehicle category generally apply at the chassis manufacturer level. Class 2b–8 vocational vehicles and their engines emit approximately 20 percent of the GHG emissions and burn approximately 21 percent of the fuel consumed by today's heavy-duty truck sector.<sup>42</sup>

The Phase 1 program for vocational vehicles has vehicle standards and separate engine standards, both of which differ based on the weight class of the vehicle into which the engine will be installed. The vehicle weight class groups mirror those used for the engine standards—Classes 2b–5 (light heavy-duty or LHD in EPA regulations), Classes 6 & 7 (medium heavy-duty or MHD in EPA regulations) and Class 8 (heavy heavy-duty or HHD in EPA regulations). Manufacturers demonstrate compliance with the Phase 1 vocational vehicle CO<sub>2</sub> and fuel consumption standards using a vehicle simulation tool described in Section II. The Phase 1 program for vocational vehicles limited the simulation tool inputs to tire rolling resistance. The model assumes the use of a typical representative, compliant engine in the simulation, resulting in one overall value for CO<sub>2</sub> emissions and one for fuel consumption.

Engines used in vocational vehicles are subject to separate Phase 1 engine-based standards. Optional certification paths, for EPA and NHTSA, are also provided to enhance the flexibilities for vocational vehicles. Manufacturers producing spark-ignition (or gasoline) cab-complete or incomplete vehicles weighing over 14,000 lbs GVWR and below 26,001 lbs GVWR have the option to certify to the complete vehicle standards for heavy-duty pickup trucks and vans rather than using the separate engine and chassis standards for vocational vehicles.

#### (d) Engine Standards

The agencies established separate Phase 1 performance standards for the engines manufactured for use in vocational vehicles and Class 7 and 8 tractors.<sup>43</sup> These engine standards vary depending on engine size linked to intended vehicle service class. EPA's engine-based CO<sub>2</sub> standards and NHTSA's engine-based fuel consumption standards are being implemented using EPA's existing test procedures and regulatory structure for criteria pollutant emissions from heavy-duty engines.

The agencies also finalized a regulatory alternative whereby a manufacturer, for an interim period of the 2014–2016 MYs, would have the option to comply with a unique standard based on a three percent reduction from an individual engine model's own 2011 MY baseline level.<sup>44</sup>

<sup>41</sup> As explained in Section XII, EPA is proposing to recodify the Phase 1 requirements for pickups and vans from 40 CFR 1037.104 into 40 CFR part 86, which is also the regulatory part that applies for light-duty vehicles.

<sup>42</sup> EPA MOVES model, <http://www.epa.gov/otaq/models/moves/index.htm>.

<sup>43</sup> See 76 FR 57114 explaining why NHTSA's authority under the Energy Independence and Safety Act includes authority to establish separate engine standards.

<sup>44</sup> See 76 FR 57144.

#### (e) Manufacturers Excluded From the Phase 1 Standards

Phase 1 temporarily deferred greenhouse gas emissions and fuel consumption standards for any manufacturers of heavy-duty engines, manufacturers of combination tractors, and chassis manufacturers for vocational vehicles that meet the “small business” size criteria set by the Small Business Administration (SBA). 13 CFR 121.201 defines a small business by the maximum number of employees; for example, this is currently 1,000 for heavy-duty vehicle manufacturing and 750 for engine manufacturing. In order to utilize this exemption, qualifying small businesses must submit a declaration to the agencies. See Section I.F.(1)(b) for a summary of how Phase 2 would apply for small businesses.

The agencies stated that they would consider appropriate GHG and fuel consumption standards for these entities as part of a future regulatory action. This includes both U.S.-based and foreign small-volume heavy-duty manufacturers.

#### (2) Costs and Benefits of the Phase 1 Program

Overall, EPA and NHTSA estimated that the Phase 1 HD National Program will cost the affected industry about \$8 billion, while saving vehicle owners fuel costs of nearly \$50 billion over the lifetimes of MY 2014–2018 vehicles. The agencies also estimated that the combined standards will reduce CO<sub>2</sub> emissions by about 270 million metric tons and save about 530 million barrels of oil over the life of MY 2014 to 2018 vehicles. The agencies estimated additional monetized benefits from CO<sub>2</sub> reductions, improved energy security, reduced time spent refueling, as well as possible disbenefits from increased driving accidents, traffic congestion, and noise. When considering all these factors, we estimated that Phase 1 of the HD National Program will yield \$49 billion in net benefits to society over the lifetimes of MY 2014–2018 vehicles.

EPA estimated the benefits of reduced ambient concentrations of particulate matter and ozone resulting from the Phase 1 program to range from \$1.3 to \$4.2 billion in 2030.<sup>45</sup>

In total, we estimated the combined Phase 1 standards will reduce GHG emissions from the U.S. heavy-duty fleet by approximately 76 million metric tons of CO<sub>2</sub>-equivalent annually by 2030. In its Environmental Impact Statement for

the Phase 1 rule, NHTSA also quantified and/or discussed other potential impacts of the program, such as the health and environmental impacts associated with changes in ambient exposures to toxic air pollutants and the benefits associated with avoided non-CO<sub>2</sub> GHGs (methane, nitrous oxide, and HFCs).

#### (3) Phase 1 Program Flexibilities

As noted above, the agencies adopted numerous provisions designed to give manufacturers a degree of flexibility in complying with the Phase 1 standards. These provisions, which are essentially identical in structure and function in NHTSA’s and EPA’s regulations, enabled the agencies to consider overall standards that are more stringent and that will become effective sooner than we could consider with a more rigid program, one in which all of a manufacturer’s similar vehicles or engines would be required to achieve the same emissions or fuel consumption levels, and at the same time.<sup>46</sup>

Phase 1 included four primary types of flexibility: Averaging, banking, and trading (ABT) provisions; early credits; advanced technology credits (including hybrid powertrains); and innovative technology credit provisions. The ABT provisions were patterned on existing EPA and NHTSA ABT programs (including the light-duty GHG and fuel economy standards) and will allow a vehicle manufacturer to reduce CO<sub>2</sub> emission and fuel consumption levels further than the level of the standard for one or more vehicles to generate ABT credits. The manufacturer can use those credits to offset higher emission or fuel consumption levels in the same averaging set, “bank” the credits for later use, or “trade” the credits to another manufacturer. As also noted above, for HD pickups and vans, we adopted a fleet averaging system very similar to the light-duty GHG and CAFE fleet averaging system. In both programs, manufacturers are allowed to carry-forward deficits for up to three years without penalty.

The agencies provided in the ABT programs flexibility for situations in which a manufacturer is unable to avoid a negative credit balance at the end of the year. In such cases, manufacturers are not considered to be out of compliance unless they are unable to

make up the difference in credits by the end of the third subsequent model year.

In total, the Phase 1 program divides the heavy-duty sector into 19 subcategories of vehicles. These subcategories are grouped into 9 averaging sets to provide greater opportunities in leveraging compliance. For tractors and vocational vehicles, the fleet averaging sets are Classes 2b through 5, Classes 6 and 7, and Class 8 weight classes. For engines, the fleet averaging sets are gasoline engines, light heavy-duty diesel engines, medium heavy-duty diesel engines, and heavy heavy-duty diesel engines. Complete HD pickups and vans (both spark-ignition and compression-ignition) are the final fleet averaging set.

As noted above, the agencies included a restriction on averaging, banking, and trading of credits between the various regulatory subcategories by defining three HD vehicle averaging sets: Light heavy-duty (Classes 2b–5); medium heavy-duty (Class 6–7); and heavy heavy-duty (Class 8). This allows the use of credits between vehicles within the same weight class. This means that a Class 8 day cab tractor can exchange credits with a Class 8 high roof sleeper tractor but not with a smaller Class 7 tractor. Also, a Class 8 vocational vehicle can exchange credits with a Class 8 tractor. However, we did not allow trading between engines and chassis. We similarly allowed for trading among engine categories only within an averaging set, of which there are four: Spark-ignition engines, compression-ignition light heavy-duty engines, compression-ignition medium heavy-duty engines, and compression-ignition heavy heavy-duty engines.

In addition to ABT, the other primary flexibility provisions in the Phase 1 program involve opportunities to generate early credits, advanced technology credits (including for use of hybrid powertrains), and innovative technology credits.<sup>47</sup> For the early credits and advanced technology credits, the agencies adopted a 1.5 × multiplier, meaning that manufacturers would get 1.5 credits for each early credit and each advanced technology credit. In addition, advanced technology credits for Phase 1 can be used anywhere within the heavy-duty sector (including both vehicles and engines). Put another way, as a means of promoting this promising technology,

<sup>45</sup> **Note:** These calendar year benefits do not represent the same time frame as the model year lifetime benefits described above, so they are not additive.

<sup>46</sup> NHTSA explained that it has greater flexibility in the HD program to include consideration of credits and other flexibilities in determining appropriate and feasible levels of stringency than it does in the light-duty CAFE program. *Cf.* 49 U.S.C. 32902(h), which applies to light-duty CAFE but not heavy-duty fuel efficiency under 49 U.S.C. 32902(k).

<sup>47</sup> Early credits are for engines and vehicles certified before EPA standards became mandatory, advanced technology credits are for hybrids and/or Rankine cycle engines, and innovative technology credits are for other technologies not in the 2010 fleet whose benefits are not reflected using the Phase 1 test procedures.

the Phase 1 rule does not restrict averaging or trading by averaging set in this instance.

For other vehicle or engine technologies that can reduce CO<sub>2</sub> and fuel consumption, but for which there do not yet exist established methods for quantifying reductions, the agencies wanted to encourage the development of such innovative technologies, and therefore adopted special “innovative technology” credits. These innovative technology credits apply to technologies that are shown to produce emission and fuel consumption reductions that are not adequately recognized on the Phase 1 test procedures and that were not yet in widespread use in the heavy-duty sector before MY 2010. Manufacturers need to quantify the reductions in fuel consumption and CO<sub>2</sub> emissions that the technology is expected to achieve, above and beyond those achieved on the existing test procedures. As with ABT, the use of innovative technology credits is allowed only among vehicles and engines of the same defined averaging set generating the credit, as described above. The credit multiplier likewise does not apply for innovative technology credits.

#### (4) Implementation of Phase 1

Manufacturers have already begun complying with the Phase 1 standards. In some cases manufacturers voluntarily chose to comply early, before compliance was mandatory. The Phase 1 rule allows manufacturers to generate credits for such early compliance. The market appears to be very accepting of the new technology, and the agencies have seen no evidence of “pre-buy” effects in response to the standards. In fact sales have been higher in recent years than they were before Phase 1 began. Moreover, manufacturers’ compliance plans are taking advantage of the Phase 1 flexibilities, and we have yet to see significant non-compliance with the standards.

#### (5) Litigation on Phase 1 Rule

The D.C. Circuit recently rejected all challenges to the agencies’ Phase 1 regulations. The court did not reach the merits of the challenges, holding that none of the petitioners had standing to bring their actions, and that a challenge to NHTSA’s denial of a rulemaking petition could only be brought in District Court. See *Delta Construction Co. v. EPA*, 783 F. 3d 1291 (D.C. Cir. 2015), U.S. App. LEXIS 6780, F.3d (D.C. Cir. April 24, 2015).

#### C. Summary of the Proposed Phase 2 Standards and Requirements

The agencies are proposing new standards that build on and enhance existing Phase 1 standards, as well as proposing the first ever standards for certain trailers used in combination with heavy-duty tractors. Taken together, the proposed Phase 2 program would comprise a set of largely technology-advancing standards that would achieve greater GHG and fuel consumption savings than the Phase 1 program. As described in more detail in the following sections, the agencies are proposing these standards because, based on the information available at this time, we believe they would best match our respective statutory authorities when considered in the context of available technology, feasible reductions of emissions and fuel consumption, costs, lead time, safety, and other relevant factors. The agencies request comment on all aspects of our feasibility analysis including projections of feasible market adoption rates and technological effectiveness for each technology.

The proposed Phase 2 standards would represent a more technology-forcing<sup>48</sup> approach than the Phase 1 approach, predicated on use of both off-the-shelf technologies and emerging technologies that are not yet in widespread use. The agencies are proposing standards for MY 2027 that would likely require manufacturers to make extensive use of these technologies. For existing technologies and technologies in the final stages of development, we project that manufacturers would likely apply them to nearly all vehicles, excluding those specific vehicles with applications or uses that would prevent the technology from functioning properly. We also project as one possible compliance pathway that manufacturers could apply other more advanced technologies such as hybrids and waste engine heat recovery systems, although at lower application rates.

Under Alternative 3, the preferred alternative, the agencies propose to provide ten years of lead time for manufacturers to meet these 2027 standards, which the agencies believe is adequate to implement the technologies industry could use to meet the proposed standards. For some of the more

advanced technologies production prototype parts are not yet available, though they are in the research stage with some demonstrations in actual vehicles.<sup>49</sup> Additionally, even for the more developed technologies, phasing in more stringent standards over a longer timeframe may help manufacturers to ensure better reliability of the technology and to develop packages to work in a wide range of applications. Moving more quickly, however, as in Alternative 4, would lead to earlier and greater cumulative fuel savings and greenhouse gas reductions.

As discussed later, the agencies are also proposing new standards in MYs 2018 (trailers only), 2021, and 2024 to ensure manufacturers make steady progress toward the 2027 standards, thereby achieving steady and feasible reductions in GHG emissions and fuel consumption in the years leading up to the MY 2027 standards. Moving more quickly, however, as in Alternative 4, would lead to earlier and greater cumulative fuel and greenhouse gas savings.

Providing additional lead time can often enable manufacturers to resolve technological challenges or to find lower cost means of meeting new regulatory standards, effectively making them more feasible in either case. See generally *NRDC v. EPA*, 655 F. 2d 318, 329 (D.C. Cir. 1981). On the other hand, manufacturers and/or operators may incur additional costs if regulations require them to make changes to their products with less lead time than manufacturers would normally have when bringing a new technology to the market or expanding the application of existing technologies. After developing a new technology, manufacturers typically conduct extensive field tests to ensure its durability and reliability in actual use. Standards that accelerate technology deployment can lead to manufacturers incurring additional costs to accelerate this development work, or can lead to manufacturers beginning production before such testing can be completed. Some industry stakeholders have informed EPA that when manufacturers introduced new emission control technologies (primarily diesel particulate filters) in response to the 2007 heavy-duty engine standards

<sup>48</sup> In this context, the term “technology-forcing” is used to distinguish standards that will effectively require manufacturers to develop new technologies (or to significantly improve technologies) from standards that can be met using off-the-shelf technology alone. Technology-forcing standards do not require manufacturers to use any specific technologies.

<sup>49</sup> “Prototype” as it is used here refers to technologies that have a potentially production-feasible design that is expected to meet all performance, functional, reliability, safety, manufacturing, cost and other requirements and objectives that is being tested in laboratories and on highways under a full range of operating conditions, but is not yet available in production vehicles already for sale in the market.

they did not perform sufficient product development validation, which led to additional costs for operators when the technologies required repairs or other resulted in other operational issues in use. Thus, the issues of costs, lead time, and reliability are intertwined for the agencies' determination of whether standards are reasonable.

Another important consideration is the possibility of disrupting the market, such as might happen if we were to adopt standards that manufacturers respond to by applying a new technology too suddenly. Several of the heavy-duty vehicle manufacturers, fleets, and commercial truck dealerships informed the agencies that for fleet purchases that are planned more than a year in advance, *expectations* of reduced reliability, increased operating costs, reduced residual value, or of large increases in purchase prices can lead the fleets to pull-ahead by several months planned future vehicle purchases by pre-buying vehicles without the newer technology. In the context of the Class 8 tractor market, where a relatively small number of large fleets typically purchase very large volumes of tractors, such actions by a small number of firms can result in large swings in sales volumes. Such market impacts would be followed by some period of reduced purchases that can lead to temporary layoffs at the factories producing the engines and vehicles, as well as at supplier factories, and disruptions at dealerships. Such market impacts also can reduce the overall environmental and fuel consumption benefits of the standards by delaying the rate at which the fleet turns over. See *International Harvester v. EPA*, 478 F. 2d 615, 634 (D.C. Cir. 1973). A number of industry stakeholders have informed EPA that the 2007 EPA heavy-duty engine criteria pollutant standard resulted in this pull-ahead phenomenon for the Class 8 tractor market. The agencies understand the potential impact that a pull-ahead can have on American manufacturing and labor, dealerships, truck purchasers, and on the program's environmental and fuel savings goals, and have taken steps in the design of the proposed program to avoid such disruption. These steps include the following:

- Providing considerable lead time, including two to three additional years for the preferred alternative compared to Alternative 4
- The standards will result in significantly lower operating costs for vehicle owners (unlike the 2007 standard, which increased operating costs)

- Phasing in the standards
- Structuring the program so the industry will have a significant range of technology choices to be considered for compliance, rather than the one or two new technologies the OEMs pursued in 2007
- Allowing manufacturers to use emissions averaging, banking and trading to phase in the technology even further

We request comment on the sufficiency of the proposed Phase 2 structure, lead time, and stringency to avoid market disruptions. We note an important difference, however, between standards for criteria pollutants, with generally no attendant fuel savings, and the fuel consumption/GHG emission standards proposed today, which provide immediate and direct financial benefits to vehicle purchasers, who will begin saving money on fuel costs as soon as they begin operating the vehicles. It would seem logical, therefore, that vehicle purchasers (and manufacturers) would weigh those significant fuel savings against the potential for increased costs that could result from applying fuel-saving technologies sooner than they might otherwise choose in the absence of the standards.

As discussed in the Phase 1 final rule, NHTSA has certain statutory considerations to take into account when determining feasibility of the preferred alternative.<sup>50</sup> The Energy Independence and Security Act (EISA) states that NHTSA (in consultation with EPA and the Secretary of Energy) shall develop a commercial medium- and heavy-duty fuel efficiency program designed "to achieve the maximum feasible improvement."<sup>51</sup> Although there is no definition of maximum feasible standards in EISA, NHTSA is directed to consider three factors when determining what the maximum feasible standards are. Those factors are, appropriateness, cost-effectiveness, and technological feasibility,<sup>52</sup> which modify "feasible" beyond its plain meaning.

NHTSA has the broad discretion to weigh and balance the aforementioned factors in order to accomplish EISA's mandate of determining maximum feasible standards. The fact that the factors may often be at odds gives NHTSA significant discretion to decide what weight to give each of the competing factors, policies and concerns and then determine how to balance them—as long as NHTSA's

balancing does not undermine the fundamental purpose of the EISA: Energy conservation, and as long as that balancing reasonably accommodates "conflicting policies that were committed to the agency's care by the statute."<sup>53</sup>

EPA also has significant discretion in assessing, weighing, and balancing the relevant statutory criteria. Section 202(a)(2) of the Clean Air Act requires that the standards "take effect after such period as the Administrator finds necessary to permit the development and application of the requisite technology, giving appropriate consideration to the cost of compliance within such period." This language affords EPA considerable discretion in how to weight the critical statutory factors of emission reductions, cost, and lead time (76 FR 57129–57130). Section 202(a) also allows (although it does not compel) EPA to adopt technology-forcing standards. *Id.* at 57130.

Giving due consideration to the agencies' respective statutory criteria discussed above, the agencies are proposing these technology-forcing standards for MY 2027. The agencies nevertheless recognize that there is some uncertainty in projecting costs and effectiveness, especially for those technologies not yet widely available, but believe that the thresholds proposed for consideration account for realistic projections of technological development discussed throughout this notice and in the draft RIA. The agencies are requesting comment on the alternatives described in Section X below. These alternatives range from Alternative 1 (which is a no-action alternative that serves as the baseline for our cost and benefit analyses) to Alternative 5 (which includes the most stringent of the alternative standards analyzed by the agencies). The assessment of these different alternatives considers the importance of allowing manufacturers sufficient flexibility and discretion while achieving meaningful fuel consumption and GHG emissions reductions across vehicle types. The agencies look forward to receiving comments on questions of feasibility and long-term projections of costs and effectiveness.

As discussed throughout this document, the agencies believe Alternative 4 has potential to be the maximum feasible alternative, however, based on the evidence currently before us, the agencies have outstanding questions regarding relative risks and

<sup>50</sup> 75 FR 57198.

<sup>51</sup> 49 U.S.C. 32902(k).

<sup>52</sup> *Id.*

<sup>53</sup> *Center for Biological Diversity v. National Highway Traffic Safety Admin.*, 538 F.3d 1172, 1195 (9th Cir. 2008).

benefits of that option in the timeframe envisioned. We are seeking comment on these relative risks and benefits.

Alternative 3 is generally designed to achieve the vehicle levels of fuel consumption and GHG reduction that Alternative 4 would achieve, but with two to three years of additional lead-time—*i.e.*, the Alternative 3 standards would end up in the same place as the Alternative 4 standards, but two to three years later, meaning that manufacturers could, in theory, apply new technology at a more gradual pace and with greater flexibility as discussed above. However, Alternative 4 would lead to earlier and greater cumulative fuel savings and greenhouse gas reductions.

In the sections that follow, the agencies have closely examined the potential feasibility of Alternative 4 for each subcategory. The agencies may consider establishing final fuel efficiency and GHG standards in whole or in part in the Alternative 4 timeframe if we deem them to be maximum feasible and reasonable for NHTSA and EPA, respectively. The agencies seek comment on the feasibility of Alternative 4, whether for some or for all segments, including empirical data on its appropriateness, cost-effectiveness, and technological feasibility. The agencies also note the possibility of adoption in MY 2024 of a standard reflecting deployment of some, rather than all, of the technologies on which Alternative 4 is predicated. It is also possible that the agencies could adopt some or all of the proposal (Alternative 3) earlier than MY 2027, but later than MY 2024, based especially on lead time considerations. Any such choices would involve a considered weighing of the issues of feasibility of projected technology penetration rates, associated costs, and necessary lead time, and would consider the information on available technologies, their level of performance and costs set out in the administrative record to this proposal.

Sections II through VI of this notice explain the consideration that the agencies took into account in considering options and proposing a preferred alternative based on balancing of the statutory factors under 42 U.S.C. 7521(a)(1) and (2), and under 49 U.S.C. 32902(k).

#### (1) Carryover From Phase 1 Program and Proposed Compliance Changes

Phase 2 will carry over many of the compliance approaches developed for Phase 1, with certain changes as described below. Readers are referred to the proposed regulatory text for much more detail. Note that some of these

provisions are being carried over with revisions or additions (such as those needed to address trailers).

#### (a) Certification

EPA and NHTSA are proposing to apply the same general certification procedures for Phase 2 as are currently being used for certifying to the Phase 1 standards. The agencies, however, are proposing changes to the simulation tool used for the vocational vehicle, tractor and trailer standards that would allow the simulation tool to more specifically reflect improvements to transmissions and drivetrains.<sup>54</sup> Rather than the model using default values for transmissions and drivetrains, manufacturers would enter measured or tested values as inputs reflecting performance of their actual transmission and drivetrain technologies.

The agencies apply essentially the same process for certifying tractors and vocational vehicles, and propose largely to apply it to trailers as well. The Phase 1 certification process for engines used in tractors and vocational vehicles was based on EPA's process for showing compliance with the heavy-duty engine criteria pollutant standards, and the agencies propose to continue it for Phase 2. Finally, we also propose to continue certifying HD pickups and vans using the Phase 1 vehicle certification process, which is very similar to the light-duty vehicle certification process.

EPA and NHTSA are also proposing to clarify provisions related to confirming a manufacturer's test data during certification (*i.e.*, confirmatory testing) and verifying a manufacturer's vehicles are being produced to perform as described in the application for certification (*i.e.*, selective enforcement audits or SEAs). The EPA confirmatory testing provisions for engines and vehicles are in 40 CFR 1036.235 and 1037.235. The SEA provisions are in 40 CFR 1036.301 and 1037.301. The NHTSA provisions are in 49 CFR 535.9(a). Note that these clarifications would also apply for Phase 1 engines and vehicles. The agencies welcome suggestions for alternative approaches that would offer the same degree of compliance assurance for GHGs and fuel consumption as these programs offer with respect to EPA's criteria pollutants.

<sup>54</sup> As described in Section IV, although the proposed trailer standards were developed using the simulation tool, the agencies are proposing a compliance structure that does not require trailer manufacturers to actually use the compliance tool.

#### (b) Averaging, Banking and Trading (ABT)

The Phase 1 ABT provisions were patterned on established EPA ABT programs that have proven to work well. In Phase 1, the agencies determined this flexibility would provide an opportunity for manufacturers to make necessary technological improvements and reduce the overall cost of the program without compromising overall environmental and fuel economy objectives. We propose to generally continue this Phase 1 approach with few revisions for vehicles regulated in Phase 1. As described in Section IV, we are proposing a more limited averaging program for trailers. The agencies see the ABT program as playing an important role in making the proposed technology-advancing standards feasible, by helping to address many issues of technological challenges in the context of lead time and costs. It provides manufacturers flexibilities that assist the efficient development and implementation of new technologies and therefore enable new technologies to be implemented at a more aggressive pace than without ABT.

ABT programs are more than just add-on provisions included to help reduce costs, and can be, as in EPA's Title II programs generally, an integral part of the standard setting itself. A well-designed ABT program can also provide important environmental and energy security benefits by increasing the speed at which new technologies can be implemented (which means that more benefits accrue over time than with later-commencing standards) and at the same time increase flexibility for, and reduce costs to, the regulated industry and ultimately consumers. Without ABT provisions (and other related flexibilities), standards would typically have to be numerically less stringent since the numerical standard would have to be adjusted to accommodate issues of feasibility and available lead time. See 75 FR 25412–25413. By offering ABT credits and additional flexibilities the agencies can offer progressively more stringent standards that help meet our fuel consumption reduction and GHG emission goals at a faster and more cost-effective pace.<sup>55</sup>

#### (i) Carryover of Phase 1 Credits and Credit Life

The agencies propose to continue the five-year credit life provisions from Phase 1, and are not proposing any

<sup>55</sup> See *NRDC v. Thomas*, 805 F.2d 410, 425 (D.C. Cir. 1986) (upholding averaging as a reasonable and permissible means of implementing a statutory provision requiring technology-forcing standards).

additional restriction on the use of banked Phase 1 credits in Phase 2. In other words, Phase 1 credits in MY2019 could be used in Phase 1 or in Phase 2 in MYs 2021–2024. Although, as we have already noted, the numerical values of proposed Phase 2 standards are not directly comparable in an absolute sense to the existing Phase 1 standards (in other words, a given vehicle would have a different g/ton-mile emission rate when evaluated using Phase 1 GEM than it would when evaluated using Phase 2 GEM), we believe that the Phase 1 and Phase 2 credits are largely equivalent. Because the standards and emission levels are included in a relative sense (as a difference), it is not necessary for the Phase 1 and Phase 2 standards to be directly equivalent in an absolute sense in order for the credits to be equivalent.

This is best understood by examining the way in which credits are calculated. For example, the credit equations in 40 CFR 1037.705 and 49 CFR 535.7 calculate credits as the product of the difference between the standard and the vehicle's emission level (g/ton-mile or gallon/1,000 ton-mile), the regulatory payload (tons), production volume, and regulatory useful life (miles). Phase 2 would not change payloads, production volumes, or useful lives for tractors, medium and heavy heavy-duty engines, or medium and heavy heavy-duty vocational vehicles. However, EPA is proposing to change the regulatory useful lives of HD pickups and vans, light heavy-duty vocational vehicles, spark-ignited engines, and light heavy-duty compression-ignition engines. Because useful life is a factor in determining the value of a credit, the agencies are proposing interim adjustment factors to ensure banked credits maintain their value in the transition from Phase 1 to Phase 2.

For Phase 1, EPA aligned the useful life for GHG emissions with the useful life already in place for criteria pollutants. After the Phase 1 rules were finalized, EPA updated the useful life for criteria pollutants as part of the Tier 3 rulemaking.<sup>56</sup> The new useful life implemented for Tier 3 is 150,000 miles or 15 years, whichever occurs first. This is the same useful life proposed in Phase 2 for HD pickups and vans, light heavy-duty vocational vehicles, spark-ignited engines, and light heavy-duty compression-ignition engines.<sup>57</sup> The numerical value of the adjustment factor for each of these regulatory categories

depends on the Phase 1 useful life. These are described in detail below in this preamble in Sections II, V, and VI. Without these adjustment factors the proposed changes in useful life would effectively result in a discount of banked credits that are carried forward from Phase 1 to Phase 2, which is not the intent of the changes in the useful life. With the relatively flat deterioration generally associated with CO<sub>2</sub>, EPA does not believe the proposed changes in useful life would significantly affect the feasibility of the proposed Phase 2 standards. EPA requests comments on the proposed changes to useful life. We note that the primary purpose of allowing manufacturers to bank credits is to provide flexibility in managing transitions to new standards. The five-year credit life is substantial, and would allow credits generated in either Phase 1 or early in Phase 2 to be used for the intended purpose. The agencies believe longer credit life is not necessary to accomplish this transition. Restrictions on credit life serve to reduce the likelihood that any manufacturer would be able to use banked credits to disrupt the heavy-duty vehicle market in any given year by effectively limiting the amount of credits that can be held. Without this limit, one manufacturer that saved enough credits over many years could achieve a significant cost advantage by using all the credits in a single year. The agencies believe, subject to consideration of public comment, that allowing a five year credit life for all credits, and as a consequence allowing use of Phase 1 credits in Phase 2, creates appropriate flexibility and appropriately facilitates a smooth transition to each new level of standards.

Although we are not proposing any additional restrictions on the use of Phase 1 credits, we are requesting comment on this issue. Early indications suggest that positive market reception to the Phase 1 technologies could lead to manufacturers accumulating credit surpluses that could be quite large at the beginning of the proposed Phase 2 program. This appears especially likely for tractors. The agencies are specifically requesting comment on the likelihood of this happening, and whether any regulatory changes would be appropriate in response. For example, should the agencies limit the amount of credits that could be carried over from Phase 1 or limit them to the first year or two of the Phase 2 program? Also, if we determine that large surpluses are likely, how should that factor into our decision on

the feasibility of more stringent standards in MY 2021?

#### (ii) Averaging Sets

EPA has historically restricted averaging to some extent for its HD emission standards to avoid creating unfair competitive advantages or environmental risks due to credits being inconsistent. Under Phase 1, averaging, banking and trading can only occur within and between specified "averaging sets" (with the exception of credits generated through use of specified advanced technologies). We propose to continue this regime in Phase 2, to retain the existing vehicle and engine averaging sets, and create new trailer averaging sets. We also propose to continue the averaging set restrictions from Phase 1 in Phase 2. These averaging sets for vehicles are:

- Complete pickups and vans
- Other light heavy-duty vehicles (Classes 2b–5)
- Medium heavy-duty vehicles (Class 6–7)
- Heavy heavy-duty vehicles (Class 8)
- Long dry van trailers
- Short dry van trailers
- Long refrigerated trailers
- Short refrigerated trailers

We also propose not to allow trading between engines and chassis, even within the same vehicle class. Such trading would essentially result in double counting of emission credits, because the same engine technology would likely generate credits relative to both standards. We similarly would limit trading among engine categories to trades within the designated averaging sets:

- Spark-ignition engines
- Compression-ignition light heavy-duty engines
- Compression-ignition medium heavy-duty engines
- Compression-ignition heavy heavy-duty engines

The agencies continue to believe that restricting trading to within the same eight classes would provide adequate opportunities for manufacturers to make necessary technological improvements and to reduce the overall cost of the program without compromising overall environmental and fuel efficiency objectives, and is therefore appropriate and reasonable under EPA's authority and maximum feasible under NHTSA's authority, respectively. We do not expect emissions from engines and vehicles—when restricted by weight class—to be dissimilar. We therefore expect that the lifetime vehicle performance and emissions levels will be very similar across these defined

<sup>56</sup> 79 FR 23492, April 28, 2014 and 40 CFR 86.1805–17.

<sup>57</sup> NHTSA's useful life is based on mileage and years of duration.

categories, and the estimated credit calculations will fairly ensure the expected fuel consumption and GHG emission reductions.

We continue to believe, subject to consideration of public comment, that the Phase 1 averaging sets create the most flexibility that is appropriate without creating an unfair advantage for manufacturers with erratically integrated portfolios, including engines and vehicles. See 76 FR 57240. The agencies committed in Phase 1 to seek public comment after credit trading begins with manufacturers certifying in 2014 on whether broader credit trading is more appropriate in developing the next phase of HD regulations (76 FR 57128, September 15, 2011). The 2014 model year end of year reports will become available to the agencies in mid-2015. Therefore, the agencies will provide information at that point. We welcome comment on averaging set restrictions. The agencies propose to continue this carry forward provision for phase 2 for the same reasons.

#### (iii) Credit Deficits

The Phase 1 regulations allow manufacturers to carry-forward deficits for up to three years without penalty. This is an important flexibility because the program is designed to address the diversity of the heavy-duty industry by allowing manufacturers to sell a mix of engines or vehicles that have very different emission levels and fuel efficiencies. Under this construct, manufacturers can offset sales of engines or vehicles not meeting the standards by selling others (within the same averaging set) that are much better than required. However, in any given year it is possible that the actual sales mix will not balance out and the manufacturer may be short of credits for that model year. The three year provision allows for this possibility and creates additional compliance flexibility to accommodate it.

#### (iv) Advanced Technology Credits

At this time, the agencies believe it is no longer appropriate to provide extra credit for the technologies identified as advanced technologies for Phase 1, although we are requesting comment on this issue. The Phase 1 advanced technology credits were adopted to promote the implementation of advanced technologies, such as hybrid powertrains, Rankine cycle engines, all-electric vehicles, and fuel cell vehicles (see 40 CFR 1037.150(i)). As the agencies stated in the Phase 1 final rule, the Phase 1 standards were not premised on the use of advanced technologies but we expected these

advanced technologies to be an important part of the Phase 2 rulemaking (76 FR 57133, September 15, 2011). The proposed Phase 2 heavy-duty engine and vehicles standards are premised on the use of some advanced technologies, making them equivalent to other fuel-saving technologies in this context. We believe the Phase 2 standards themselves would provide sufficient incentive to develop them.

We request comment on this issue, especially with respect to electric vehicle, plug-in hybrid, and fuel cell technologies. Although the proposed standards are premised on some use of Rankine cycle engines and hybrid powertrains, none of the proposed standards are based on projected utilization of the use of the other advanced technologies. (Note that the most stringent alternative is based on some use of these technologies). Commenters are encouraged to consider the recently adopted light-duty program, which includes temporary incentives for these technologies.

#### (c) Innovative Technology and Off-Cycle Credits

The agencies propose to largely continue the Phase 1 innovative technology program but to redesignate it as an off-cycle program for Phase 2. In other words, beginning in MY 2021 technologies that are not fully accounted for in the GEM simulation tool, or by compliance dynamometer testing would be considered “off-cycle”, including those technologies that may no longer be considered innovative technologies. However, we are not proposing to apply this flexibility to trailers (which were not part of Phase 1) in order to simplify the program for trailer manufacturers.

The agencies propose to maintain that, in order for a manufacturer to receive credits for Phase 2, the off-cycle technology would still need to meet the requirement that it was not in common use prior to MY 2010. Although, we have not identified specific off-cycle technologies at this time that should be excluded, we believe it may be prudent to continue this requirement to avoid the potential for manufacturers to receive windfall credits for technologies that they were already using before MY 2010. Nevertheless, the agencies seek comment on whether off-cycle technologies in the Phase 2 program should be limited in this way. In particular, the agencies are concerned that because the proposed Phase 2 program would be implemented MY 2021 and may extend beyond 2027, the agencies and manufacturers may have difficulty in the future determining

whether an off-cycle technology was in common use prior to MY 2010. Moreover, because we have not identified a single off-cycle technology that should be excluded by this provision at this time, we are concerned that this approach may create an unnecessary hindrance to the off-cycle program.

Manufacturers would be able to carry over an innovative technology credits from Phase 1 into Phase 2, subject to the same restrictions as other credits. Manufacturers would also be able to carry over the improvement factor (not the credit value) of a technology, if certain criteria were met. The agencies would require documentation for all off-cycle requests similar to those required by EPA for its light-duty GHG program.

Additionally, NHTSA would not grant any off-cycle credits for crash avoidance technologies. NHTSA would also require manufacturers to consider the safety of off-cycle technologies and would request a safety assessment from the manufacturer for all off-cycle technologies.

The agencies seek comment on these proposed changes, as well as the possibility of adopting aspects of the light-duty off-cycle program.

#### (d) Alternative Fuels

The agencies are proposing to largely continue the Phase 1 approach for engines and vehicles fueled by fuels other than gasoline and diesel.<sup>58</sup> Phase 1 engine emission standards applied uniquely for gasoline-fueled and diesel-fueled engines. The regulations in 40 CFR part 86 implement these distinctions for alternative fuels by dividing engines into Otto-cycle and Diesel-cycle technologies based on the combustion cycle of the engine. The agencies are, however, proposing a small change that is described in Section II. Under the proposed change, we would require manufacturers to divide their natural gas engines into primary intended service classes, like the current requirement for compression-ignition engines. Any alternative fuel-engine qualifying as a medium heavy-duty engine or a heavy heavy-duty engine would be subject to all the emission standards and other requirements that apply to compression-ignition engines. Note that this small change in approach would also apply with respect to EPA's criteria pollutant program.

We are also proposing that the Phase 2 standards apply exclusively at the

<sup>58</sup> See Section I. F. (1) (a) for a summary of certain specific changes we are proposing or considering for natural gas-fueled engines and vehicles.



vehicle tailpipe. That is, compliance is based on vehicle fuel consumption and GHG emission reductions, and does not reflect any so-called lifecycle emission properties. The agencies have explained why it is reasonable that the heavy duty standards be fuel neutral in this manner. See 76 FR 57123; see also 77 FR 51705 (August 24, 2012) and 77 FR 51500 (August 27, 2012). In particular, EPA notes that there is a separate, statutorily-mandated program under the Clean Air Act which encourages use of renewable fuels in transportation fuels, including renewable fuel used in heavy-duty diesel engines. This program considers lifecycle greenhouse gas emissions compared to petroleum fuel. NHTSA notes that the fuel efficiency standards are necessarily tailpipe-based, and that a lifecycle approach would likely render it impossible to harmonize the fuel efficiency and GHG emission standards, to the great detriment of our goal of achieving a coordinated program. 77 FR 51500–51501; see also 77 FR 51705 (similar finding by EPA); see also section I.F. (1) (a) below.

One consequence of the tailpipe-based approach is that the agencies are proposing to treat vehicles powered by electricity the same as in Phase 1. In Phase 1, EPA treated all electric vehicles as having zero emissions of CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O (see 40 CFR 1037.150(f)). Similarly, NHTSA adopted regulations in Phase 1 that set the fuel consumption standards based on the fuel consumed by the vehicle. The agencies also did not require emission testing for electric vehicles in Phase 1. The agencies considered the potential unintended consequence of not accounting for upstream emissions from the charging of heavy-duty electric vehicles. In our reassessment for Phase 2, we have not found any all-electric heavy-duty vehicles that have certified by 2014. As we look to the future, we project very limited adoption of all-electric vehicles into the market. Therefore, we believe that this provision is still appropriate. Unlike the 2017–2025 light-duty rule, which included a cap whereby upstream emissions would be counted after a certain volume of sales (see 77 FR 62816–62822), we believe there is no need to propose a cap for heavy-duty vehicles because of the small likelihood of significant production of EV technologies in the Phase 2 timeframe. We welcome comments on this approach.<sup>59</sup> Note that we also request

comment on upstream emissions for natural gas in Section XI.

#### (e) Phase 1 Interim Provisions

EPA adopted several flexibilities for the Phase 1 program (40 CFR 1036.150 and 1037.150) as interim provisions. Because the existing regulations do not have an end date for Phase 1, most of these provisions did not have an explicit end date. NHTSA adopted similar provisions. With few exceptions, the agencies are proposing not to apply these provisions to Phase 2. These will generally remain in effect for the Phase 1 program. In particular, the agencies note that we do not propose to continue the blanket exemption for small manufacturers. Instead, the agencies propose to adopt narrower and more targeted relief.

#### (f) In-Use Standards

Section 202(a)(1) of the CAA specifies that EPA is to adopt emissions standards that are applicable for the useful life of the vehicle and for the engine. EPA finalized in-use standards for the Phase 1 program whereas NHTSA adopted an approach which does not include these standards. For the Phase 2 program, EPA will carry-over its in-use provisions and NHTSA proposes to adopt EPA's useful life requirements for its vehicle and engine fuel consumption standards to ensure manufacturers consider in the design process the need for fuel efficiency standards to apply for the same duration and mileage as EPA standards. If EPA determines a manufacturer fails to meet its in-use standards, civil penalties may be assessed. NHTSA seeks comment on the appropriateness of seeking civil penalties for failure to comply with its fuel efficiency standards in these instances. NHTSA would limit such penalties to situations in which it determined that the vehicle or engine manufacturer failed to comply with the standards.

#### (2) Proposed Phase 2 Standards

This section briefly summarizes the proposed Phase 2 standards for each category and identifies the technologies that the agencies project would be needed to meet the standards. Given the large number of different regulatory categories and model years for which separate standards are being proposed, the actual numerical standards are not listed. Readers are referred to Sections II through IV for the tables of proposed standards.

#### (a) Summary of the Proposed Engine Standards

The agencies are proposing to continue the basic Phase 1 structure for the Phase 2 engine standards. There would be separate standards and test cycles for tractor engines, vocational diesel engines, and vocational gasoline engines. However, as described in Section II, we are proposing a revised test cycle for tractor engines to better reflect actual in-use operation.

For diesel engines, the agencies are proposing standards for MY 2027 requiring reduction in CO<sub>2</sub> emissions and fuel consumption of 4.2 percent better than the 2017 baseline.<sup>60</sup> We are also proposing standards for MY 2021 and MY 2024, requiring reductions in CO<sub>2</sub> emissions and fuel consumption of 1.5 to 3.7 percent better than the 2017 baseline. The agencies project that these reductions would be feasible based on technological changes that would improve combustion and reduce energy losses. For most of these improvements, the agencies project manufacturers will begin applying them to about 50 percent of their heavy-duty engines by 2021, and ultimately apply them to about 90 percent of their heavy-duty engines by 2024. However, for some of these improvements we project more limited application rates. In particular, we project a more limited use of waste exhaust heat recovery systems in 2027, projecting that about 10 percent of tractor engines will have turbo-compounding systems, and an additional 15 percent of tractor engines would employ Rankine-cycle waste heat recovery. We do not project that turbo-compounding or Rankine-cycle waste heat recovery technology will be utilized in vocational engines. Although we see great potential for waste heat recovery systems to achieve significant fuel savings and CO<sub>2</sub> emission reductions, we are not projecting that the technology could be available for more wide-spread use in this time frame.

For gasoline vocational engines, we are not proposing new more stringent engine standards. Gasoline engines used in vocational vehicles are generally the same engines as are used in the complete HD pickups and vans in the Class 2b and 3 weight categories. Given the relatively small sales volumes for gasoline-fueled vocational vehicles, manufacturers typically cannot afford to invest significantly in developing separate technology for these vocational vehicle engines. Thus, we project that vocational gasoline engines would

<sup>59</sup> See also Section I. C. (1) (b)(iv) above (soliciting comment on need for advanced technology incentive credits for heavy duty EVs).

<sup>60</sup> Phase 1 standards for diesel engines will be fully phased-in by MY 2017.

include the same technology as would be used to meet the pickup and van chassis standards, and this would result in some real world reductions in CO<sub>2</sub> emissions and fuel consumption. Although it is difficult at this time to project how much improvement would be observed during certification testing, it seems likely that these improvements would reduce measured CO<sub>2</sub> emissions

and fuel consumption by about one percent. Therefore, we are requesting comment on finalizing a Phase 2 standard of 621 g/hp-hr for gasoline engines (*i.e.*, one percent more stringent than the 2016 Phase 1 standard of 627 g/hp-hr) in MY 2027. We note that the proposed MY 2027 vehicle standards for gasoline-fueled vocational vehicles are predicated in part on the use of

advanced friction reduction technology with effectiveness over the GEM cycles of about one percent. We also request comment on whether not proposing more stringent standards for gasoline engines would create an incentive for purchasers who would have otherwise chosen a diesel vehicle to instead choose a gasoline vehicle.

TABLE I-2—SUMMARY OF PHASE 1 AND PROPOSED PHASE 2 REQUIREMENTS FOR ENGINES IN COMBINATION TRACTORS AND VOCATIONAL VEHICLES

	Phase 1 program	Alternative 3–2027 (proposed standard)	Alternative 4–2024 (also under consideration)
Covered in this category .....	Engines installed in tractors and vocational chassis.		
Share of HDV fuel consumption and GHG emissions.	Combination tractors and vocational vehicles account for approximately 85 percent of fuel use and GHG emissions in the medium and heavy duty truck sector.		
Per vehicle fuel consumption and CO <sub>2</sub> improvement.	5%–9% improvement over MY 2010 baseline, depending vehicle application. Improvements are in addition to improvements from tractor and vocational vehicle standards.	4% improvement over MY 2017 for diesel engines. Note that improvements are captured in complete vehicle tractor and vocational vehicle standards, so that engine improvements and the vehicle improvement shown below are not additive.	
Form of the standard .....	EPA: CO <sub>2</sub> grams/horsepower-hour and NHTSA: Gallons of fuel/horsepower-hour.		
Example technology options available to help manufacturers meet standards.	Combustion, air handling, friction and emissions after-treatment technology improvements.	Further technology improvements and increased use of all Phase 1 technologies, plus waste heat recovery systems for tractor engines (e.g., turbo-compound and Rankine-cycle).	
Flexibilities .....	ABT program which allows emissions and fuel consumption credits to be averaged, banked, or traded (five year credit life). Manufacturers allowed to carry-forward credit deficits for up to three model years. Interim incentives for advanced technologies, recognition of innovative (off-cycle) technologies not accounted for by the HD Phase 1 test procedures, and credits for certifying early.	Same as Phase 1, except no advanced technology incentives. Adjustment factor of 1.36 proposed for credits carried forward from Phase 1 to Phase 2 for SI and LHD CI engines due to proposed change in useful life.	

#### (b) Summary of the Proposed Tractor Standards

As explained in Section III, the agencies are proposing to largely continue the Phase 1 tractor program but to propose new standards. The tractor standards proposed for MY 2027 would achieve up to 24 percent lower CO<sub>2</sub> emissions and fuel consumption than a 2017 model year Phase 1 tractor. The agencies project that the proposed 2027 tractor standards could be met through improvements in the:

- Engine<sup>61</sup> (including some use of waste heat recovery systems)
- Transmission
- Driveline
- Aerodynamic design
- Tire rolling resistance
- Idle performance
- Other accessories of the tractor.

The agencies' evaluation shows that some of these technologies are available today, but have very low adoption rates on current vehicles, while others will require some lead time for development. The agencies are proposing to enhance the GEM vehicle simulation tool to

recognize these technologies, as described in Section II.C.

We have also determined that there is sufficient lead time to introduce many of these tractor and engine technologies into the fleet at a reasonable cost starting in the 2021 model year. The proposed 2021 model year standards for combination tractors and engines would achieve up to 13 percent lower CO<sub>2</sub> emissions and fuel consumption than a 2017 model year Phase 1 tractor, and the 2024 model year standards would achieve up to 20 percent lower CO<sub>2</sub> emissions and fuel consumption.

<sup>61</sup> Although the agencies are proposing separate engine standards and separate engine certification,

engine improvements would also be reflected in the vehicle certification process. Thus, it is appropriate

to also consider engine improvements in the context of the vehicle standards.

TABLE I-3—SUMMARY OF PHASE 1 AND PROPOSED PHASE 2 REQUIREMENTS FOR CLASS 7 AND CLASS 8 COMBINATION TRACTORS

	Phase 1 program	Alternative 3—2027 (proposed standard)	Alternative 4—2024 (also under consideration)
Covered in this category .....	Tractors that are designed to pull trailers and move freight.		
Share of HDV fuel consumption and GHG emissions.	Combination tractors and their engines account for approximately two thirds of fuel use and GHG emissions in the medium and heavy duty truck sector.		
Per vehicle fuel consumption and CO <sub>2</sub> improvement.	10%–23% improvement over MY 2010 baseline, depending on tractor category. Improvements are in addition to improvements from engine standards.	18%–24% improvement over MY 2017 standards.	
Form of the standard .....	EPA: CO <sub>2</sub> grams/ton payload mile and NHTSA: Gallons of fuel/1,000 ton payload mile.		
Example technology options available to help manufacturers meet standards.	Aerodynamic drag improvements; low rolling resistance tires; high strength steel and aluminum weight reduction; extended idle reduction; and speed limiters.	Further technology improvements and increased use of all Phase 1 technologies, plus engine improvements, improved and automated transmissions and axles, powertrain optimization, tire inflation systems, and predictive cruise control (depending on tractor type).	
Flexibilities .....	ABT program which allows emissions and fuel consumption credits to be averaged, banked, or traded (five year credit life). Manufacturers allowed to carry-forward credit deficits for up to three model years. Interim incentives for advanced technologies, recognition of innovative (off-cycle) technologies not accounted for by the HD Phase 1 test procedures, and credits for certifying early.	Same as Phase 1, except no extra credits for advanced technologies or early certification.	

## (c) Summary of the Proposed Trailer Standards

This proposed rule is a set of GHG emission and fuel consumption standards for manufacturers of new trailers that are used in combination with tractors that would significantly reduce CO<sub>2</sub> and fuel consumption from combination tractor-trailers nationwide over a period of several years. As described in Section IV, there are numerous aerodynamic and tire technologies available to manufacturers to accomplish these proposed standards. For the most part, these technologies have already been introduced into the market to some extent through EPA's

voluntary SmartWay program. However, adoption is still somewhat limited.

The agencies are proposing incremental levels of Phase 2 standards that would apply beginning in MY 2018 and be fully phased-in by 2027. These standards are predicated on use of aerodynamic and tire improvements, with trailer OEMs making incrementally greater improvements in MYs 2021 and 2024 as standard stringency increases in each of those model years. EPA's GHG emission standards would be mandatory beginning in MY 2018, while NHTSA's fuel consumption standards would be voluntary beginning in MY 2018, and be mandatory beginning in MY 2021.

As described in Section XV.D and Chapter 12 of the draft RIA, the agencies are proposing special provisions to minimize the impacts on small trailer manufacturers. These provisions have been informed by and are largely consistent with recommendations coming from the SBAR Panel that EPA conducted pursuant to Section 609(b) of the Regulatory Flexibility Act (RFA). Broadly, these provisions provide additional lead time for small manufacturers, as well as simplified testing and compliance requirements. The agencies are also requesting comment on whether there is a need for additional provisions to address small business issues.

TABLE I-4—SUMMARY OF PROPOSED PHASE 2 REQUIREMENTS FOR TRAILERS

	Phase 1 program	Alternative 3—2027 (proposed standard)	Alternative 4—2024 (also under consideration)
Covered in this category .....	Trailers hauled by low, mid, and high roof day and sleeper cab tractors, except those qualified as logging, mining, stationary or heavy-haul.		
Share of HDV fuel consumption and GHG emissions.	Trailers are modeled together with combination tractors and their engines. Together, they account for approximately two thirds of fuel use and GHG emissions in the medium and heavy duty truck sector.		
Per vehicle fuel consumption and CO <sub>2</sub> improvement.	N/A .....	Between 3% and 8% improvement over MY 2017 baseline, depending on the trailer type.	

TABLE I-4—SUMMARY OF PROPOSED PHASE 2 REQUIREMENTS FOR TRAILERS—Continued

	Phase 1 program	Alternative 3—2027 (proposed standard)	Alternative 4—2024 (also under consideration)
Form of the standard .....	N/A .....	EPA: CO <sub>2</sub> grams/ton payload mile and NHTSA: Gallons/1,000 ton payload mile.	
Example technology options available to help manufacturers meet standards.	N/A .....	Low rolling resistance tires, automatic tire inflation systems, weight reduction for most trailers, aerodynamic improvements such as side and rear fairings, gap closing devices, and undercarriage treatment for box-type trailers (e.g., dry and refrigerated vans).	
Flexibilities .....	N/A .....	One year delay in implementation for small businesses, trailer manufacturers may use pre-approved devices to avoid testing, averaging program for manufacturers of dry and refrigerated box trailers.	

## (d) Summary of the Proposed Vocational Vehicle Standards

As explained in Section V, the agencies are proposing to revise the Phase 1 vocational vehicle program and to propose new standards. These proposed standards also reflect further sub-categorization from Phase 1, with separate proposed standards based on mode of operation: Urban, regional, and multi-purpose. The agencies are also proposing alternative standards for emergency vehicles.

The agencies project that the proposed vocational vehicle standards could be met through improvements in the engine, transmission, driveline, lower rolling resistance tires, workday idle reduction technologies, and weight reduction, plus some application of hybrid technology. These are described

in Section V of this preamble and in Chapter 2.9 of the draft RIA. These MY 2027 standards would achieve up to 16 percent lower CO<sub>2</sub> emissions and fuel consumption than MY 2017 Phase 1 standards. The agencies are also proposing revisions to the compliance regime for vocational vehicles. These include: The addition of an idle cycle that would be weighted along with the other drive cycles; and revisions to the vehicle simulation tool to reflect specific improvements to the engine, transmission, and driveline.

Similar to the tractor program, we have determined that there is sufficient lead time to introduce many of these new technologies into the fleet starting in MY 2021. Therefore, we are proposing new standards for MY 2021 and 2024. Based on our analysis, the

MY 2021 standards for vocational vehicles would achieve up to 7 percent lower CO<sub>2</sub> emissions and fuel consumption than a MY 2017 Phase 1 vehicle, on average, and the MY 2024 standards would achieve up to 11 percent lower CO<sub>2</sub> emissions and fuel consumption.

In Phase 1, EPA adopted air conditioning (A/C) refrigerant leakage standards for tractors, as well as for heavy-duty pickups and vans, but not for vocational vehicles. For Phase 2, EPA believes that it would be feasible to apply similar A/C refrigerant leakage standards for vocational vehicles, beginning with the 2021 model year. The process for certifying that low leakage components are used would follow the system currently in place for comparable systems in tractors.

TABLE I-5—SUMMARY OF PHASE 1 AND PROPOSED PHASE 2 REQUIREMENTS FOR VOCATIONAL VEHICLE CHASSIS

	Phase 1 program	Alternative 3—2027 (proposed standard)	Alternative 4—2024 (also under consideration)
Covered in this category .....	Class 2b–8 chassis that are intended for vocational services such as delivery vehicles, emergency vehicles, dump truck, tow trucks, cement mixer, refuse trucks, etc., except those qualified as off-highway vehicles.		
.....	Because of sector diversity, vocational vehicle chassis are segmented into Light, Medium and Heavy Duty vehicle categories and for Phase 2 each of these segments are further subdivided using three duty cycles: Regional, Multi-purpose, and Urban.		
Share of HDV fuel consumption and GHG emissions.	Vocational vehicles account for approximately 20 percent of fuel use and GHG emissions in the medium and heavy duty truck sector categories.		
Per vehicle fuel consumption and CO <sub>2</sub> improvement.	2% improvement over MY 2010 baseline. Improvements are in addition to improvements from engine standards.	Up to 16% improvement over MY 2017 standards.	
Form of the standard .....	EPA: CO <sub>2</sub> grams/ton payload mile and NHTSA: Gallons of fuel/1,000 ton payload mile.		
Example technology options available to help manufacturers meet standards.	Low rolling resistance tires .....	Further technology improvements and increased use of Phase 1 technologies, plus improved engines, transmissions and axles, powertrain optimization, weight reduction, hybrids, and workday idle reduction systems.	

TABLE I-5—SUMMARY OF PHASE 1 AND PROPOSED PHASE 2 REQUIREMENTS FOR VOCATIONAL VEHICLE CHASSIS—Continued

	Phase 1 program	Alternative 3—2027 (proposed standard)	Alternative 4—2024 (also under consideration)
Flexibilities .....	ABT program which allows emissions and fuel consumption credits to be averaged, banked, or traded (five year credit life). Manufacturers allowed to carry-forward credit deficits for up to three model years. Interim incentives for advanced technologies, recognition of innovative (off-cycle) technologies not accounted for by the HD Phase 1 test procedures, and credits for certifying early.	Same as Phase 1, except no advanced technology incentives.	
.....	.....	Chassis intended for emergency vehicles have proposed Phase 2 standards based only on Phase 1 technologies, and may continue to certify using a simplified Phase 1-style GEM tool. Adjustment factor of 1.36 proposed for credits carried forward from Phase 1 to Phase 2 due to proposed change in useful life.	

## (e) Summary of the Proposed Heavy-Duty Pickup and Van Standards

The agencies are proposing to adopt new Phase 2 GHG emission and fuel consumption standards for heavy-duty

pickups and vans that would be applied in largely the same manner as the Phase 1 standards. These standards are based on the extensive use of most known and proven technologies, and could result in

some use of strong hybrid powertrain technology. These proposed standards would commence in MY 2021. Overall, the proposed standards are 16 percent more stringent by 2027.

TABLE I-6—SUMMARY OF PHASE 1 AND PROPOSED PHASE 2 REQUIREMENTS FOR HD PICKUPS AND VANS

	Phase 1 program	Alternative 3—2027 (proposed standard)	Alternative 4—2025 (also under consideration)
Covered in this category .....	Class 2b and 3 complete pickup trucks and vans, including all work vans and 15-passenger vans but excluding 12-passenger vans which are subject to light-duty standards.		
Share of HDV fuel consumption and GHG emissions.	HD pickups and vans account for approximately 15% of fuel use and GHG emissions in the medium and heavy duty truck sector.		
Per vehicle fuel consumption and CO <sub>2</sub> improvement.	15% improvement over MY 2010 baseline for diesel vehicles, and 10% improvement for gasoline vehicles.	16% improvement over MY 2018–2020 standards.	
Form of the standard .....	Phase 1 standards are based upon a “work factor” attribute that combines truck payload and towing capabilities, with an added adjustment for 4-wheel drive vehicles. There are separate target curves for diesel-powered and gasoline-powered vehicles. As proposed, the Phase 2 standards would be based on the same approach.		
Example technology options available to help manufacturers meet standards.	Engine improvements, transmission improvements, aerodynamic drag improvements, low rolling resistance tires, weight reduction, and improved accessories.	Further technology improvements and increased use of all Phase 1 technologies, plus engine stop-start, and powertrain hybridization (mild and strong).	

TABLE I-6—SUMMARY OF PHASE 1 AND PROPOSED PHASE 2 REQUIREMENTS FOR HD PICKUPS AND VANS—Continued

	Phase 1 program	Alternative 3—2027 (proposed standard)	Alternative 4—2025 (also under consideration)
Flexibilities .....	Two optional phase-in schedules; ABT program which allows emissions and fuel consumption credits to be averaged, banked, or traded (five year credit life). Manufacturers allowed to carry-forward credit deficits for up to three model years. Interim incentives for advanced technologies, recognition of innovative (off-cycle) technologies not accounted for by the HD Phase 1 test procedures, and credits for certifying early.	Proposed to be same as Phase 1, with phase-in schedule based on year-over-year increase in stringency. Adjustment factor of 1.25 proposed for credits carried forward from Phase 1 to Phase 2 due to proposed change in useful life. Proposed cessation of advanced technology incentives in 2021 and continuation of off-cycle credits.	

(f) Summary of the Proposed Final Numeric Standards by Regulatory Subcategory

Table I-7 lists the proposed final (*i.e.*, MY 2027) numeric standards by

regulatory subcategory for tractors, trailers, vocational vehicles and engines.

Note that these are the same final numeric standards for Alternative 4, but for Alternative 4 these would be

implemented in MY 2024 instead of MY 2027.

TABLE I-7—PROPOSED FINAL (MY 2027) NUMERIC STANDARDS BY REGULATORY SUBCATEGORY

Regulatory subcategory	CO <sub>2</sub> grams per ton-mile (for engines CO <sub>2</sub> grams per brake horsepower-hour)	Fuel consumption gallon per 1,000 ton-mile (for engines gallons per 100 brake horsepower-hour)
Tractors:		
Class 7 Low Roof Day Cab .....	87	8.5462
Class 7 Mid Roof Day Cab .....	96	9.4303
Class 7 High Roof Day Cab .....	96	9.4303
Class 8 Low Roof Day Cab .....	70	6.8762
Class 8 Mid Roof Day Cab .....	76	7.4656
Class 8 High Roof Day Cab .....	76	7.4656
Class 8 Low Roof Sleeper Cab .....	62	6.0904
Class 8 Mid Roof Sleeper Cab .....	69	6.7780
Class 8 High Roof Sleeper Cab .....	67	6.5815
Trailers:		
Long Dry Box Trailer .....	77	7.5639
Short Dry Box Trailer .....	140	13.7525
Long Refrigerated Box Trailer .....	80	7.8585
Short Refrigerated Box Trailer .....	144	14.1454
Vocational Diesel:		
LHD Urban .....	272	26.7191
LHD Multi-Purpose .....	280	27.5049
LHD Regional .....	292	28.6837
MHD Urban .....	172	16.8959
MHD Multi-Purpose .....	174	17.0923
MHD Regional .....	170	16.6994
HHD Urban .....	182	17.8782
HHD Multi-Purpose .....	183	17.9764
HHD Regional .....	174	17.0923
Vocational Gasoline:		
LHD Urban .....	299	33.6446
LHD Multi-Purpose .....	308	34.6574
LHD Regional .....	321	36.1202
MHD Urban .....	189	21.2670
MHD Multi-Purpose .....	191	21.4921
MHD Regional .....	187	21.0420
HHD Urban .....	196	22.0547
HHD Multi-Purpose .....	198	22.2797
HHD Regional .....	188	21.1545
Diesel Engines:		
LHD Vocational .....	553	5.4322
MHD Vocational .....	553	5.4322
HHD Vocational .....	533	5.2358
MHD Tractor .....	466	4.5776

TABLE I-7—PROPOSED FINAL (MY 2027) NUMERIC STANDARDS BY REGULATORY SUBCATEGORY—Continued

Regulatory subcategory	CO <sub>2</sub> grams per ton-mile (for engines CO <sub>2</sub> grams per brake horsepower-hour)	Fuel consumption gallon per 1,000 ton-mile (for engines gallons per 100 brake horsepower-hour)
HHD Tractor .....	441	4.3320

Similar to Phase 1 the agencies are proposing for Phase 2 a set of continuous equation-based standards for HD pickups and vans. Please refer to Section 6, subsection B.1, for a description of these standards, including associated tables and figures.

#### *D. Summary of the Costs and Benefits of the Proposed Rule*

This section summarizes the projected costs and benefits of the proposed NHTSA fuel consumption and EPA GHG emission standards, along with those of Alternative 4. These projections helped to inform the agencies' choices among the alternatives considered, along with other relevant factors, and NHTSA's Draft Environmental Impact Statement (DEIS). See Sections VII through IX and the Draft RIA for additional details about these projections.

For this rule, the agencies conducted coordinated and complementary analyses using two analytical methods for the heavy-duty pickup and van segment by employing both DOT's CAFE model and EPA's MOVES model. The agencies used EPA's MOVES model to estimate fuel consumption and emissions impacts for tractor-trailers (including the engine that powers the tractor), and vocational vehicles (including the engine that powers the vehicle). Additional calculations were performed to determine corresponding monetized program costs and benefits. For heavy-duty pickups and vans, the agencies performed complementary analyses, which we refer to as "Method A" and "Method B." In Method A, the CAFE model was used to project a pathway the industry could use to comply with each regulatory alternative and the estimated effects on fuel consumption, emissions, benefits and costs. In Method B, the CAFE model was used to project a pathway the industry could use to comply with each regulatory alternative, along with resultant impacts on per vehicle costs, and the MOVES model was used to calculate corresponding changes in total fuel consumption and annual emissions. Additional calculations were performed to determine corresponding monetized program costs and benefits. NHTSA considered Method A as its central

analysis and Method B as a supplemental analysis. EPA considered the results of both methods. The agencies concluded that both methods led the agencies to the same conclusions and the same selection of the proposed standards. See Section VII for additional discussion of these two methods.

#### *(1) Reference Case Against Which Costs and Benefits Are Calculated*

The No Action Alternative for today's analysis, alternatively referred to as the "baseline" or "reference case," assumes that the agencies would not issue new rules regarding MD/HD fuel efficiency and GHG emissions. This is the baseline against which costs and benefits for the proposed standards are calculated. The reference case assumes that model year 2018 standards would be extended indefinitely and without change.

The agencies recognize that if the proposed rule is not adopted, manufacturers will continue to introduce new heavy-duty vehicles in a competitive market that responds to a range of factors. Thus manufacturers might have continued to improve technologies to reduce heavy-duty vehicle fuel consumption. Thus, as described in Section VII, both agencies fully analyzed the proposed standards and the regulatory alternatives against two reference cases. The first case uses a baseline that projects very little improvement in new vehicles in the absence of new Phase 2 standards, and the second uses a more dynamic baseline that projects more significant improvements in vehicle fuel efficiency. NHTSA considered its primary analysis to be based on the more dynamic baseline, where certain cost-effective technologies are assumed to be applied by manufacturers to improve fuel efficiency beyond the Phase 1 requirements in the absence of new Phase 2 standards. EPA considered both reference cases. The results for all of the regulatory alternatives relative to both reference cases, derived via the same methodologies discussed in this section, are presented in Section X of the preamble.

The agencies chose to analyze these two different baselines because the agencies recognize that there are a number of factors that create uncertainty

in projecting a baseline against which to compare the future effects of the proposed action and the remaining alternatives. The composition of the future fleet—such as the relative position of individual manufacturers and the mix of products they each offer—cannot be predicted with certainty at this time. Additionally, the heavy-duty vehicle market is diverse, as is the range of vehicle purchasers. Heavy-duty vehicle manufacturers have reported that their customers' purchasing decisions are influenced by their customers' own determinations of minimum total cost of ownership, which can be unique to a particular customer's circumstances. For example, some customers (e.g., less-than-truckload or package delivery operators) operate their vehicles within a limited geographic region and typically own their own vehicle maintenance and repair centers within that region. These operators tend to own their vehicles for long time periods, and sometimes for the entire service life of the vehicle. Their total cost of ownership is influenced by their ability to better control their own maintenance costs, and thus they can afford to consider fuel efficiency technologies that have longer payback periods, outside of the vehicle manufacturer's warranty period. Other customers (e.g. truckload or long-haul operators) tend to operate cross-country, and thus must depend upon truck dealer service centers for repair and maintenance. Some of these customers tend to own their vehicles for about four to seven years, so that they typically do not have to pay for repair and maintenance costs outside of either the manufacturer's warranty period or some other extended warranty period. Many of these customers tend to require seeing evidence of fuel efficiency technology payback periods on the order of 18 to 24 months before seriously considering evaluating a new technology for potential adoption within their fleet (NAS 2010, Roeth et al. 2013, Klemick et al. 2014). Purchasers of HD pickups and vans wanting better fuel efficiency tend to demand that fuel consumption improvements pay back within approximately one to three years, but some HD pickup and van owners accrue



relatively few vehicle miles traveled per year, such that they may be less likely to adopt new fuel efficiency technologies, while other owners who use their vehicle(s) with greater intensity may be even more willing to pay for fuel efficiency improvements. Regardless of the type of customer, their determination of minimum total cost of ownership involves the customer balancing their own unique circumstances with a heavy-duty vehicle's initial purchase price, availability of credit and lease options, expectations of vehicle reliability, resale value and fuel efficiency technology payback periods. The degree of the incentive to adopt additional fuel efficiency technologies also depends on customer expectations of future fuel prices, which directly impacts customer payback periods. Purchasing decisions are not based exclusively on payback period, but also include the considerations discussed above and in Section X.A.1. For the baseline analysis, the agencies use payback period as a proxy for all of these considerations, and therefore the payback period for the

baseline analysis is shorter than the payback period industry uses as a threshold for the further consideration of a technology. The agencies request comment on which alternative baseline scenarios would be most appropriate for analysis in the final rule. Specifically, the agencies request empirical evidence to support whether the agencies should use for the final rule the central cases used in this proposal, alternative sensitivity cases such as those mentioned below, or some other scenarios. See Section X.A.1 of this Preamble and Chapter 11 of the draft RIA for a more detailed discussion of baselines.

As part of a sensitivity analysis, additional baseline scenarios were also evaluated for HD pickups and vans, including baseline payback periods of 12, 18 and 24 months. See Section VI of this Preamble and Chapter 10 of the draft RIA for a detailed discussion of these additional scenarios.

## (2) Costs and Benefits Projected for the Standards Being Proposed and Alternative 4

The tables below summarize the benefits and costs for the program in two ways: First, from the perspective of a program designed to improve the Nation's energy security and to conserve energy by improving fuel efficiency and then from the perspective of a program designed to reduce GHG emissions. The individual categories of benefits and costs presented in the tables below are defined more fully and presented in more detail in Chapter 8 of the draft RIA.

Table I-8 shows benefits and costs for the proposed standards and Alternative 4 from the perspective of a program designed to improve the Nation's energy security and conserve energy by improving fuel efficiency. From this viewpoint, technology costs occur when the vehicle is purchased. Fuel savings are counted as benefits that occur over the lifetimes of the vehicles produced during the model years subject to the Phase 2 standards as they consume less fuel.

**TABLE I-8—LIFETIME FUEL SAVINGS, GHG REDUCTIONS, BENEFITS, COSTS AND NET BENEFITS FOR MODEL YEARS 2018–2029 VEHICLES USING ANALYSIS METHOD A**  
[Billions of 2012\$]<sup>a b</sup>

Category	Alternative			
	3 Preferred		4	
	7% Discount rate	3% Discount rate	7% Discount rate	3% Discount rate
Fuel Reductions (Billion Gallons) .....	72.2–76.7		81.9–86.7	
GHG reductions (MMT CO <sub>2</sub> eq) .....	974–1,034		1,102–1,166	
Vehicle Program: Technology and Indirect Costs, Normal Profit on Additional Investments .....	25.0–25.4	16.8–17.1	32.9–34.3	22.5–23.5
Additional Routine Maintenance .....	1.0–1.1	0.6–0.6	1.0–1.1	0.6–0.7
Congestion, Accidents, and Noise from Increased Vehicle Use .....	4.5–4.7	2.6–2.8	4.7–4.9	2.7–2.8
Total Costs .....	30.5–31.1	20.0–20.5	38.7–40.8	25.8–27.0
Fuel Savings (valued at pre-tax prices) .....	165.1–175.1	89.2–94.2	187.4–198.3	102.0–107.5
Savings from Less Frequent Refueling .....	2.9–3.1	1.5–1.6	3.4–3.6	1.8–2.0
Economic Benefits from Additional Vehicle Use .....	14.7–15.1	8.2–8.4	15.0–15.4	8.4–8.6
Reduced Climate Damages from GHG Emissions <sup>c</sup> .....	32.9–34.9	32.9–34.9	37.3–39.4	37.3–39.4
Reduced Health Damages from Non-GHG Emissions .....	37.2–38.8	20–20.7	40.9–42.5	22.1–22.8
Increased U.S. Energy Security .....	8.1–8.9	4.3–4.7	9.3–10.2	5.0–5.5
Total Benefits .....	261–276	156–165	293–309	177–186
Net Benefits .....	231–245	136–144	255–269	151–159

### Notes:

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup> Range reflects two reference case assumptions 1a and 1b.

<sup>c</sup> Benefits and net benefits use the 3 percent global average SCC value applied only to CO<sub>2</sub> emissions; GHG reductions include CO<sub>2</sub>, CH<sub>4</sub>, N<sub>2</sub>O and HFC reductions, and include benefits to other nations as well as the U.S. See Draft RIA Chapter 8.5 and Preamble Section IX.G for further discussion.

Table I-9 shows benefits and cost from the perspective of reducing GHG.

TABLE I-9—LIFETIME FUEL SAVINGS, GHG REDUCTIONS, BENEFITS, COSTS AND NET BENEFITS FOR MODEL YEARS 2018–2029 VEHICLES USING ANALYSIS METHOD B  
[Billions of 2012\$]<sup>a b</sup>

Category	Alternative			
	3 Preferred		4	
	7% Discount rate	3% Discount rate	7% Discount rate	3% Discount rate
Fuel Reductions (Billion Gallons) .....	70.2 to 75.8		79.7 to 85.4	
GHG reductions (MMT CO <sub>2</sub> eq) .....	960 to 1,040		1,090 to 1,160	
Vehicle Program (e.g., technology and indirect costs, normal profit on additional investments) .....	–\$24.6 to –\$25.1	–\$16.3 to –\$16.6	–\$33.1 to –\$33.5	–\$22.2 to –\$22.5
Additional Routine Maintenance .....	–\$1.1 to –\$1.1	–\$0.6 to –\$0.6	–\$1.1 to –\$1.1	–\$0.6 to –\$0.6
Fuel Savings (valued at pre-tax prices) .....	\$159 to \$171	\$84.2 to \$90.1	\$181 to \$193	\$96.5 to \$103
Energy Security .....	\$8.5 to \$9.3	\$4.4 to \$4.8	\$9.8 to \$10.6	\$5.2 to \$5.6
Congestion, Accidents, and Noise from Increased Vehicle Use .....	–\$4.2 to –\$4.3	–\$2.4 to –\$2.4	–\$4.2 to –\$4.3	–\$2.4 to –\$2.4
Savings from Less Frequent Refueling .....	\$2.8 to \$3.1	\$1.4 to \$1.6	\$3.3 to \$3.6	\$1.7 to \$1.9
Economic Benefits from Additional Vehicle Use .....	\$14.8 to \$14.9	\$8.2 to \$8.2	\$14.7 to \$14.8	\$8.1 to \$8.1
Benefits from Reduced Non-GHG Emissions <sup>c</sup> .....	\$37.4 to \$39.7	\$17.7 to \$18.8	\$41.2 to \$43.5	\$19.7 to \$20.7
Reduced Climate Damages from GHG Emissions <sup>d</sup> .....	\$31.6 to \$34.0		\$35.9 to \$38.3	
Net Benefits .....	\$224 to \$242	\$128 to \$138	\$248 to \$265	\$142 to \$152

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Range reflects two baseline assumptions 1a and 1b.

<sup>c</sup>Range reflects both the two baseline assumptions 1a and 1b using the mid-point of the low and high \$/ton estimates for calculating benefits.

<sup>d</sup>Benefits and net benefits use the 3 percent average SCCO<sub>2</sub> value applied only to CO<sub>2</sub> emissions; GHG reductions include CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub>O reductions.

Table I-10 breaks down by vehicle category the benefits and costs for the proposed standards and Alternative 4

using the Method A analytical approach. For additional detail on per-

vehicle break-downs of costs and benefits, please see Chapter 10.

TABLE I-10—PER VEHICLE CATEGORY LIFETIME FUEL SAVINGS, GHG REDUCTIONS, BENEFITS, COSTS AND NET BENEFITS FOR MODEL YEARS 2018–2029 VEHICLES USING ANALYSIS METHOD A (BILLIONS OF 2012\$), RELATIVE TO BASELINE 1b<sup>a</sup>

Key costs and benefits by vehicle category	Alternative			
	3 Preferred		4	
	7% Discount rate	3% Discount rate	7% Discount rate	3% Discount rate
Tractors, Including Engines, and Trailers:.				
Fuel Reductions (Billion Gallons) .....	56.1		61.6	
GHG Reductions (MMT CO <sub>2</sub> eq) .....	731.1		803.1	
Total Costs .....	15.2	10.0	17.7	11.9
Total Benefits .....	177.8	105.4	194.2	115.7
Net Benefits .....	162.6	95.4	176.5	103.9
Vocational Vehicles, Including Engines:				
Fuel Reductions (Billion Gallons) .....	8.3		10.9	
GHG Reductions (MMT CO <sub>2</sub> eq) .....	107.0		139.8	
Total Costs .....	9.5	6.1	12.8	8.4
Total Benefits .....	27.7	16.0	35.0	20.6
Net Benefits .....	18.1	9.9	22.1	12.1
HD Pickups and Vans:				
Fuel Reductions (Billion Gallons) .....	7.8		9.3	
GHG Reductions (MMT CO <sub>2</sub> eq) .....	94.1		112.8	
Total Costs .....	5.5	3.7	7.8	5.3

TABLE I-10—PER VEHICLE CATEGORY LIFETIME FUEL SAVINGS, GHG REDUCTIONS, BENEFITS, COSTS AND NET BENEFITS FOR MODEL YEARS 2018–2029 VEHICLES USING ANALYSIS METHOD A (BILLIONS OF 2012\$), RELATIVE TO BASELINE 1b <sup>a</sup>—Continued

Key costs and benefits by vehicle category	Alternative			
	3 Preferred		4	
	7% Discount rate	3% Discount rate	7% Discount rate	3% Discount rate
Total Benefits .....	23.5	14.1	28.3	17.1
Net Benefits .....	18.0	10.5	20.4	11.9

**Notes:**

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE I-11—PER VEHICLE COSTS RELATIVE TO BASELINE 1a

	3 Proposed standards			4	
	MY 2021	MY 2024	MY 2027	MY 2021	MY 2024
Per Vehicle Cost (\$) <sup>a</sup>					
Tractors .....	\$6,710	\$9,940	\$11,700	\$10,200	\$12,400
Trailers .....	900	1,010	1,170	1,080	1,230
Vocational Vehicles .....	1,150	1,770	3,380	1,990	3,590
Pickups/Vans .....	520	950	1,340	1,050	1,730

**Note:**

<sup>a</sup> Per vehicle costs include new engine and vehicle technology only; costs associated with increased insurance, taxes and maintenance are included in the payback period values.

An important metric to vehicle purchasers is the payback period that can be expected on any new purchase. In other words, there is greater willingness to pay for new technology if that new technology “pays back” within an acceptable period of time. The agencies make no effort to define the

acceptable period of time, but seek to estimate the payback period for others to make the decision themselves. The payback period is the point at which reduced fuel expenditures outpace increased vehicle costs, including increased maintenance, insurance premiums and taxes. The payback

periods for vehicles meeting the standards considered for the final year of implementation (MY2024 for alternative 4 and MY2027 for the proposed standards) are shown in Table I-12, and are similar for both Method A and Method B.

TABLE I-12—PAYBACK PERIODS FOR MY2027 VEHICLES UNDER THE PROPOSED STANDARDS AND FOR MY2024 VEHICLES UNDER ALTERNATIVE 4 RELATIVE TO BASELINE 1a

[Payback occurs in the year shown; using 7% discounting]

	Proposed standards	Alternative 4
Tractors/Trailers .....	2nd	2nd
Vocational Vehicles .....	6th	6th
Pickups/Vans .....	3rd	4th

(3) Cost Effectiveness

These proposed regulations implement Section 32902(k) of EISA and Section 202(a)(1) and (2) of the Clean Air Act. Through the 2007 EISA, Congress directed NHTSA to create a medium- and heavy-duty vehicle fuel efficiency program designed to achieve the maximum feasible improvement by considering appropriateness, cost-effectiveness, and technological feasibility to determine maximum

feasible standards.<sup>62</sup> The Clean Air Act requires that any air pollutant emission standards for heavy-duty vehicles and engines take into account the costs of any requisite technology and the lead time necessary to implement such

<sup>62</sup> This EISA requirement applies to regulation of medium- and heavy-duty vehicles. For many years, and as reaffirmed by Congress in 2007, “economic practicability” has been among the factors EPCA requires NHTSA to consider when setting light-duty fuel economy standards at the (required) maximum feasible levels. NHTSA interprets “economic practicability” as a factor involving considerations broader than those likely to be involved in “cost effectiveness”.

technology. Both agencies considered overall costs, overall benefits and cost effectiveness in developing the Phase 1 standards. Although there are different ways to evaluate cost effectiveness, the essence is to consider some measure of costs relative to some measure of impacts.

Considering that Congress enacted EPCA and EISA to, among other things, address the need to conserve energy, the agencies have evaluated the proposed standards in terms of costs per gallon of fuel conserved. As described in the draft RIA, the agencies also evaluated the

proposed standards using the same approaches employed in HD Phase 1. Together, the agencies have considered the following three ratios of cost effectiveness:

1. Total costs per gallon of fuel conserved.
2. Technology costs per ton of GHG emissions reduced.
3. Technology costs minus fuel savings per ton of GHG emissions reduced.

By all three of these measures, the proposed standards would be highly cost effective.

As discussed below, the agencies estimate that over the lifetime of heavy-duty vehicles produced for sale in the U.S. during model years 2018–2029, the proposed standards would cost about \$30 billion and conserve about 75 billion gallons of fuel, such that the first measure of cost effectiveness would be about 40 cents per gallon. Relative to fuel prices underlying the agencies' analysis, the agencies have concluded that today's proposed standards would be cost effective.

With respect to the second measure, which is useful for comparisons to other GHG rules, the proposed standards would have overall \$/ton costs similar to the HD Phase 1 rule. As Chapter 7 of the draft RIA shows, technology costs by themselves would amount to less than \$50 per metric ton of GHG (CO<sub>2</sub> eq) for the entire HD Phase 2 program. This compares well to both the HD Phase 1 rule, which was estimated to cost about \$30 per metric ton of GHG (without fuel savings), and to the agencies' estimates of the social cost of carbon. Thus, even without accounting for fuel savings, the proposed standards would be cost-effective.

The third measure deducts fuel savings from technology costs, which also is useful for comparisons to other GHG rules. On this basis, net costs per ton of GHG emissions reduced would be negative under the proposed standards. This means that the value of the fuel savings would be greater than the technology costs, and there would be a net cost saving for vehicle owners. In other words, the technologies would pay for themselves (indeed, more than pay for themselves) in fuel savings.

In addition, while the net economic benefits (*i.e.*, total benefits minus total costs) of the proposed standards is not a traditional measure of their cost-effectiveness, the agencies have concluded that the total costs of the proposed standards are justified in part by their significant economic benefits. As discussed in the previous subsection and in Section IX, this rule would provide benefits beyond the fuel

conserved and GHG emissions avoided. The rule's net benefits is a measure that quantifies each of its various benefits in economic terms, including the economic value of the fuel it saves and the climate-related damages it avoids, and compares their sum to the rule's estimated costs. The agencies estimate that the proposed standards would result in net economic benefits exceeding \$100 billion, making this a highly beneficial rule.

Our current analysis of Alternative 4 also shows that, if technologically feasible, it would have similar cost-effectiveness but with greater net benefits (see Chapter 11 of the draft RIA). For example, the agencies estimate costs under Alternative 4 could be about \$40 billion and about 85 billion gallons of fuel could be conserved, such that the first measure of cost effectiveness would be about 47 cents per gallon. However, the agencies considered all of the relevant factors, not just relative cost-effectiveness, when selecting the proposed standards from among the alternatives considered. Relative cost-effectiveness was not a limiting factor for the agencies in selecting the proposed standards. It is also worth noting that the proposed standards and the Alternative 4 standards appear very cost effective, regardless of which reference case is used for the baseline, such that all of the analyses reinforced the agencies' findings.

#### *E. EPA and NHTSA Statutory Authorities*

This section briefly summarizes the respective statutory authority for EPA and NHTSA to promulgate the Phase 1 and proposed Phase 2 programs. For additional details of the agencies' authority, see Section XV of this notice as well as the Phase 1 rule.<sup>63</sup>

##### (1) EPA Authority

Statutory authority for the vehicle controls in this proposal is found in CAA section 202(a)(1) and (2) (which requires EPA to establish standards for emissions of pollutants from new motor vehicles and engines which emissions cause or contribute to air pollution which may reasonably be anticipated to endanger public health or welfare), and in CAA sections 202(d), 203–209, 216, and 301 (42 U.S.C. 7521 (a)(1) and (2), 7521(d), 7522–7543, 7550, and 7601).

Title II of the CAA provides for comprehensive regulation of mobile sources, authorizing EPA to regulate emissions of air pollutants from all mobile source categories. When acting under Title II of the CAA, EPA

considers such issues as technology effectiveness, its cost (both per vehicle, per manufacturer, and per consumer), the lead time necessary to implement the technology, and based on this the feasibility and practicability of potential standards; the impacts of potential standards on emissions reductions of both GHGs and non-GHG emissions; the impacts of standards on oil conservation and energy security; the impacts of standards on fuel savings by customers; the impacts of standards on the truck industry; other energy impacts; as well as other relevant factors such as impacts on safety.

This proposed action implements a specific provision from Title II, Section 202(a). Section 202(a)(1) of the CAA states that “the Administrator shall by regulation prescribe (and from time to time revise) . . . standards applicable to the emission of any air pollutant from any class or classes of new motor vehicles . . . , which in his judgment cause, or contribute to, air pollution which may reasonably be anticipated to endanger public health or welfare.” With EPA's December 2009 final findings that certain greenhouse gases may reasonably be anticipated to endanger public health and welfare and that emissions of GHGs from Section 202(a) sources cause or contribute to that endangerment, Section 202(a) requires EPA to issue standards applicable to emissions of those pollutants from new motor vehicles. See *Coalition for Responsible Regulation v. EPA*, 684 F. 3d at 116–125, 126–27 cert. granted by, in part *Util. Air Regulatory Group v. EPA*, 134 S. Ct. 418, 187 L. Ed. 2d 278, 2013 U.S. LEXIS 7380 (U.S., 2013), affirmed in part and reversed in part on unrelated grounds by *Util. Air Regulatory Group v. EPA*, 134 S. Ct. 2427, 189 L. Ed. 2d 372, 2014 U.S. LEXIS 4377 (U.S., 2014) (upholding EPA's endangerment and cause and contribute findings, and further affirming EPA's conclusion that it is legally compelled to issue standards under Section 202 (a) to address emission of the pollutant which endangers after making the endangerment and cause of contribute findings); see also *id.* at 127–29 (upholding EPA's light-duty GHG emission standards for MYs 2012–2016 in their entirety).

Other aspects of EPA's legal authority, including its authority under Section 202(a), its testing authority under Section 203 of the Act, and its enforcement authorities under Section 207 of the Act are discussed fully in the Phase 1 rule, and need not be repeated here. See 76 FR 57129–57130.

<sup>63</sup> 76 FR 57106–57129, September 15, 2011.

The proposed rule includes GHG emission and fuel efficiency standards applicable to trailers—an essential part of the tractor-trailer motor vehicle. Class 7/8 heavy-duty vehicles are composed of three major components:—The engine, the cab-chassis (*i.e.* the tractor), and the trailer. The fact that the vehicle consists of two detachable parts does not mean that either of the parts is not a motor vehicle. The trailer's sole purpose is to serve as the cargo-hauling part of the vehicle. Without the tractor, the trailer cannot transport property. The tractor is likewise incomplete without the trailer. The motor vehicle needs both parts, plus the engine, to accomplish its intended use. Connected together, a tractor and trailer constitute “a self-propelled vehicle designed for transporting . . . property on a street or highway,” and thus meet the definition of “motor vehicle” under Section 216(2) of the CAA. Thus, as EPA has previously explained, we interpret our authority to regulate motor vehicles to include authority to regulate such trailers. See 79 FR 46259 (August 7, 2014).<sup>64</sup>

This analysis is consistent with definitions in the Federal regulations issued under the CAA at 40 CFR 86.1803–01, where a heavy-duty vehicle “that has the primary load carrying device or container attached” is referred to as a “[c]omplete heavy-duty vehicle,” while a heavy-duty vehicle or truck “which does not have the primary load carrying device or container attached” is referred to as an “[i]ncomplete heavy-duty vehicle” or “[i]ncomplete truck.” The trailers that would be covered by this proposal are properly considered “the primary load carrying device or container” for the heavy-duty vehicles to which they become attached for use. Therefore, under these definitions, such trailers are implicitly part of a “complete heavy-duty vehicle,” and thus part of a “motor vehicle.”<sup>65 66 67</sup>

<sup>64</sup> Indeed, an argument that a trailer is not a motor vehicle because, considered (artificially) as a separate piece of equipment it is not self-propelled, applies equally to the cab-chassis—the tractor. No entity has suggested that tractors are not motor vehicles; nor is such an argument plausible.

<sup>65</sup> We note further, however, that certain hauled items, for example a boat, would not be considered to be a trailer under the proposal. See proposed section 1037.801, proposing to define “trailer” as being “designed for cargo and for being drawn by a tractor.”

<sup>66</sup> This concept is likewise reflected in the definition of “tractor” in the parallel Department of Transportation regulations: “a truck designed primarily for drawing other motor vehicles and not so constructed as to carry a load other than a part of the weight of the vehicle and the load so drawn.” See 49 CFR 571.3.

<sup>67</sup> EPA's original definition of “vehicle” in 40 CFR 1037.801 makes clear that an incomplete trailer

The argument that trailers do not themselves emit pollutants and so are not subject to emission standards is also unfounded. First, the argument lacks a factual predicate. Trailers indisputably contribute to the motor vehicle's CO<sub>2</sub> emissions by increasing engine load, and these emissions can be reduced through various means such as trailer aerodynamic and tire rolling resistance improvements. See Section IV below. The argument also lacks a legal predicate. Section 202(a)(1) authorizes standards applicable to emissions of air pollutants “from” either the motor vehicle or the engine. There is no requirement that pollutants be emitted from a specified part of the motor vehicle or engine. And indeed, the argument proves too much, since tractors and vocational vehicle chassis likewise contribute to emissions (including contributing by the same mechanisms that trailers do) but do not themselves directly emit pollutants. The fact that Section 202(a)(1) applies explicitly to both motor vehicles and engines likewise indicates that EPA has unquestionable authority to interpret pollutant emission caused by the vehicle component to be “from” the motor vehicle and so within its regulatory authority under Section 202(a)(1).<sup>68</sup>

## (2) NHTSA Authority

The Energy Policy and Conservation Act (EPCA) of 1975 mandates a regulatory program for motor vehicle fuel economy to meet the various facets of the need to conserve energy. In December 2007, Congress enacted the Energy Independence and Security Act (EISA), amending EPCA to require, among other things, the creation of a medium- and heavy-duty fuel efficiency program for the first time.

Statutory authority for the fuel consumption standards in this proposed rule is found in EISA section 103, 49 U.S.C. 32902(k). This section authorizes a fuel efficiency improvement program, designed to achieve the maximum feasible improvement to be created for commercial medium- and heavy-duty on-highway vehicles and work trucks, to include appropriate test methods, measurement metrics, standards, and

becomes a vehicle (and thus subject to the prohibition against introduction into commerce without a certificate) when it has a frame with axles attached. Complete trailers are also vehicles.

<sup>68</sup> This argument applies equally to emissions of criteria pollutants, whose rate of emission is likewise affected by vehicle characteristics. It is for this reason that EPA's implementing rules for criteria pollutants from heavy duty vehicles and engines specify a test weight for certification testing, since that weight influences the amount of pollution emission.

compliance and enforcement protocols that are appropriate, cost-effective and technologically feasible.

NHTSA has responsibility for fuel economy and consumption standards, and assures compliance with EISA through rulemaking, including standard-setting; technical reviews, audits and studies; investigations; and enforcement of implementing regulations including penalty actions. This proposed rule would continue to fulfill the requirements of Section 103 of EISA, which instructs NHTSA to create a fuel efficiency improvement program for “commercial medium- and heavy-duty on-highway vehicles and work trucks” by rulemaking, which is to include standards, test methods, measurement metrics, and enforcement protocols. See 49 U.S.C. 32902(k)(2).

Congress directed that the standards, test methods, measurement metrics, and compliance and enforcement protocols be “appropriate, cost-effective, and technologically feasible” for the vehicles to be regulated, while achieving the “maximum feasible improvement” in fuel efficiency. NHTSA has broad discretion to balance the statutory factors in Section 103 in developing fuel consumption standards to achieve the maximum feasible improvement.

As discussed in the Phase 1 final rule notice, NHTSA has determined that the five year statutory limit on average fuel economy standards that applies to passengers and light trucks is not applicable to the HD vehicle and engine standards. As a result, the Phase 1 HD engine and vehicle standards remain in effect indefinitely at their 2018 or 2019 MY levels until amended by a future rulemaking action. As was contemplated in that notice, NHTSA is currently engaging in this Phase 2 rulemaking action. Therefore, the Phase 1 standards would not remain in effect at their 2018 or 2019 MY levels indefinitely; they would remain in effect until the MY Phase 2 standards apply. In accordance with Section 103 of EISA, NHTSA will ensure that not less than four full MYs of regulatory lead-time and three full MYs of regulatory stability are provided for in the Phase 2 standards.

## (a) Authority To Regulate Trailers

As contemplated in the Phase 1 proposed and final rules, the agencies are proposing standards for trailers in this rulemaking. Because Phase 1 did not include standards for trailers, NHTSA did not discuss its authority for regulating them in the proposed or final rules; that authority is described here.

EISA directs NHTSA to “determine in a rulemaking proceeding how to implement a commercial medium- and heavy-duty on-highway vehicle and work truck fuel efficiency improvement program designed to achieve the maximum feasible improvement. . . .” EISA defines a commercial medium- and heavy-duty on-highway vehicle to mean “an on-highway vehicle with a GVWR of 10,000 lbs or more.” A “work truck” is defined as a vehicle between 8,500 and 10,000 lbs GVWR that is not an MDPV. These definitions do not explicitly exclude trailers, in contrast to MDPVs. Because Congress did not act to exclude trailers when defining GVWRs, despite demonstrating the ability to exclude MDPVs, it is reasonable to interpret the provision to include them.

Both commercial medium- and heavy-duty on-highway vehicles and work trucks, though, must be vehicles in order to be regulated under this program. Although EISA does not define the term “vehicle,” NHTSA’s authority to regulate motor vehicles under its organic statute, the Motor Vehicle Safety Act (“Safety Act”), does. The Safety Act defines a motor vehicle as “a vehicle driven or drawn by mechanical power and manufactured primarily for use on public streets, roads, and highways. . . .” NHTSA clearly has authority to regulate trailers under this Act as vehicles that are drawn and has exercised that authority numerous times. Given the absence of any apparent contrary intent on the part of Congress in EISA, NHTSA believes it is reasonable to interpret the term “vehicle” as used in the EISA definitions to have a similar meaning that includes trailers.

Furthermore, the general definition of a vehicle is something used to transport goods or persons from one location to another. A tractor-trailer is designed for the purpose of transporting goods. Therefore it is reasonable to consider all of its parts—the engine, the cab-chassis, and the trailer—as parts of a whole. As such they are all parts of a vehicle, and are captured within the definition of vehicle. As EPA describes above, the tractor and trailer are both incomplete without the other. Neither can fulfill the function of the vehicle without the other. For this reason, and the other reasons stated above, NHTSA interprets its authority to regulate commercial medium- and heavy-duty on-highway vehicles, including tractor-trailers, as encompassing both tractors and trailers.

#### (b) Authority To Regulate Recreational Vehicles

NHTSA did not regulate recreational vehicles as part of the Phase 1 medium-

and heavy-duty fuel consumption standards, although EPA did regulate them as vocational vehicles for GHG emissions.<sup>69</sup> In the Phase 1 proposed rule, NHTSA interpreted “commercial medium- and heavy-duty” to mean that recreational vehicles, such as motor homes, were not to be included within the program because recreational vehicles are not commercial. Oshkosh Corporation submitted a comment on the agency’s interpretation stating that it did not match the statutory definition of “commercial medium- and heavy-duty on-highway vehicle,” which defines the phrase by GVWR and on-highway use. In the Phase 1 final rule NHTSA agreed with Oshkosh Corporation that the agency had effectively read words into the statutory definition. However, because recreational vehicles were not proposed in the Phase 1 proposed rule, they were not within the scope of the rulemaking and were excluded from NHTSA’s standards.<sup>70</sup> NHTSA expressed that it would address recreational vehicles in its next rulemaking.

NHTSA is proposing that recreational vehicles be included in the Phase 2 fuel consumption standards. As discussed above, EISA prescribes that NHTSA shall set average fuel economy standards for work trucks and commercial medium-duty or heavy-duty on-highway vehicles. “Work truck” means a vehicle that is rated between 8,500 and 10,000 lbs GVWR and is not an MDPV. “Commercial medium- and heavy-duty on-road highway vehicle” means an on-highway vehicle with a gross vehicle weight rating of 10,000 lbs or more.<sup>71</sup> Based on the definitions in EISA, recreational vehicles would be regulated as class 2b-8 vocational vehicles. Excluding recreational vehicles from the NHTSA standards in Phase 2 could create illogical results, including treating similar vehicles differently. Moreover, including recreational vehicles under NHTSA regulations furthers the agencies’ goal of one national program, as EPA regulations already cover recreational vehicles.

NHTSA is proposing that recreational vehicles be included in the Phase 2 fuel consumption standards and that early compliance be allowed for

manufacturers who want to certify during the Phase 1 period.<sup>72</sup>

#### F. Other Issues

In addition to the standards being proposed, this notice discusses several other issues related to those standards. It also proposes some regulatory provisions related to the Phase 1 program, as well as amendments related to other EPA and NHTSA regulations. These other issues are summarized briefly here and discussed in greater detail in later sections.

##### (1) Issues Related to Phase 2

###### (a) Natural Gas Engines and Vehicles

This combined rulemaking by EPA and NHTSA is designed to regulate two separate characteristics of heavy duty vehicles: GHGs and fuel consumption. In the case of diesel or gasoline powered vehicles, there is a one-to-one relationship between these two characteristics. For alternatively fueled vehicles, which use no petroleum, the situation is different. For example, a natural gas vehicle that achieves approximately the same fuel efficiency as a diesel powered vehicle would emit 20 percent less CO<sub>2</sub>; and a natural gas vehicle with the same fuel efficiency as a gasoline vehicle would emit 30 percent less CO<sub>2</sub>. Yet natural gas vehicles consume no petroleum. In Phase 1, the agencies balanced these facts by applying the gasoline and diesel CO<sub>2</sub> standards to natural gas engines based on the engine type of the natural gas engine. Fuel consumption for these vehicles is then calculated according to their tailpipe CO<sub>2</sub> emissions. In essence, this applies a one-to-one relationship between fuel efficiency and tailpipe CO<sub>2</sub> emissions for all vehicles, including natural gas vehicles. The agencies determined that this approach would likely create a small balanced incentive for natural gas use. In other words, it created a small incentive for the use of natural gas engines that appropriately balanced concerns about the climate impact methane emissions against other factors such as the energy security benefits of using domestic natural gas. See 76 FR 57123. We propose to maintain this approach for Phase 2. Note that EPA is also considering natural gas in a broader context of life cycle emissions, as described in Section XI.

###### (b) Alternative Refrigerants

In addition to use of leak-tight components in air conditioning system

<sup>69</sup> EPA did not give special consideration to recreational vehicles because the CAA applies to heavy-duty motor vehicle generally.

<sup>70</sup> Motor homes are still subject to EPA’s Phase 1 CO<sub>2</sub> standards for vocational vehicles.

<sup>71</sup> 49 U.S.C. 32901(a)(7).

<sup>72</sup> NHTSA did not allow early compliance for one RV manufacturer in MY 2014 that is currently complying EPA’s GHG standards.

design, manufacturers could also decrease the global warming impact of refrigerant leakage emissions by adopting systems that use alternative, lower global warming potential (GWP) refrigerants, to replace the refrigerant most commonly used today, HFC-134a (R-134a). HFC-134a is a potent greenhouse gas with a GWP 1,430 times greater than that of CO<sub>2</sub>.

Under EPA's Significant New Alternatives Policy (SNAP) Program,<sup>73</sup> EPA has found acceptable, subject to use conditions, three alternative refrigerants that have significantly lower GWPs than HFC-134a for use in A/C systems in newly manufactured light-duty vehicles: HFC-152a, CO<sub>2</sub> (R-744), and HFO-1234yf.<sup>74</sup> HFC-152a has a GWP of 124, HFO-1234yf has a GWP of 4, and CO<sub>2</sub> (by definition) has a GWP of 1, as compared to HFC-134a which has a GWP of 1,430.<sup>75</sup> CO<sub>2</sub> is nonflammable, while HFO-1234yf and HFC-152a are flammable. All three are subject to use conditions requiring labeling and the use of unique fittings, and where appropriate, mitigating flammability and toxicity. Currently, the SNAP listing for HFO-1234yf is limited to newly manufactured A/C systems in LD vehicles, whereas HFC-152a and CO<sub>2</sub> have been found acceptable for all motor vehicle air conditioning applications, including heavy-duty vehicles.

None of these alternative refrigerants can simply be "dropped" into existing HFC-134a air conditioning systems. In order to account for the unique properties of each refrigerant and address use conditions required under SNAP, changes to the systems will be necessary. Typically these changes will need to occur during a vehicle redesign cycle but could also occur during a refresh. For example, because CO<sub>2</sub>, when used as a refrigerant, is physically and thermodynamically very different from HFC-134a and operates at much higher pressures, a transition to this refrigerant would require significant hardware changes. A transition to A/C systems designed for HFO-1234yf,

which is more thermodynamically similar to HFC-134a than is CO<sub>2</sub>, requires less significant hardware changes that typically include installation of a thermal expansion valve and could potentially require resized condensers and evaporators, as well as changes in other components. In addition, vehicle assembly plants require re-tooling in order to handle new refrigerants safely. Thus a change in A/C refrigerants requires significant engineering, planning, and manufacturing investments.

EPA is not aware of any significant development of A/C systems designed to use alternative refrigerants in heavy-duty vehicles;<sup>76</sup> however, all three lower GWP alternatives are in use or under various stages of development for use in LD vehicles. Of these three refrigerants, most manufacturers of LD vehicles have identified HFO-1234yf as the most likely refrigerant to be used in that application. For that reason, EPA would anticipate that HFO-1234yf could be a primary candidate for refrigerant substitution in the HD market in the future if it is listed as an acceptable substitute under SNAP for HD A/C applications. EPA has begun, but has not yet completed, our evaluation of the use of HFO-1234yf in HD vehicles. After EPA has conducted a full evaluation based on the SNAP program's comparative risk framework, EPA will list this alternative as either a) acceptable subject to use conditions or b) unacceptable if the risk of use in HD A/C systems is determined to be greater than that of the other currently or potentially available alternatives. EPA is also considering and evaluating additional refrigerant substitutes for use in motor vehicle A/C systems under the SNAP program. EPA welcomes comments related to industry development of HD A/C systems using lower-GWP refrigerants.

LD vehicle manufacturers are currently making investments in systems designed for lower-GWP refrigerants, both domestically and on a global basis. In support of the LD GHG rule, EPA projected a full transition of LD vehicles to lower-GWP alternatives in the United States by MY 2021. We expect the investment required to transition to ease over time as alternative refrigerants are adopted across all LD vehicles and trucks. This may occur in part due to increased availability of components and the continuing increases in refrigerant

production capacity, as well as knowledge gained through experience. As lower-GWP alternatives become widely used in LD vehicles, some manufacturers may wish to also transition their HD vehicles. Transitioning could be advantageous for a variety of reasons including platform standardization and company environmental stewardship policies.

Although manufacturers of HD vehicles may begin to transition to alternative refrigerants in the future, there is great uncertainty about when significant adoption of alternative refrigerants for HD vehicles might begin, on what timeline adoption might become widespread, and which refrigerants might be involved. Another factor is that the most likely candidate, HFO-1234yf, remains under evaluation and has not yet been listed under SNAP. For these reasons, EPA has not attempted to project any specific hypothetical scenarios of transition for analytical purposes in this proposed rule.

Because future introduction of and transition to lower-GWP alternative refrigerants for HD vehicles may occur, EPA is proposing regulatory provisions that would be in place if and when such alternatives become available and manufacturers of HD vehicles choose to use them. These proposed provisions would also have the effect of easing the burden associated with complying with the lower-leakage requirements when a lower-GWP refrigerant is used instead of HFC-134a. These provisions would recognize that leakage of refrigerants would be relatively less damaging from a climate perspective if one of the lower-GWP alternatives is used. Specifically, EPA is proposing to allow a manufacturer to be "deemed to comply" with the leakage standard by using a lower-GWP alternative refrigerant. In order to be "deemed to comply" the vehicle manufacturer would need to use a refrigerant other than HFC-134a that is listed as an acceptable substitute refrigerant for heavy-duty A/C systems under SNAP, and defined under the LD GHG regulations at 40 CFR 86.1867-12(e). The refrigerants currently defined at 40 CFR 86.1867-12(e), besides HFC-134a, are HFC-152a, HFO-1234yf, and CO<sub>2</sub>. If a manufacturer chooses to use a lower-GWP refrigerant that is listed in the future as acceptable in 40 CFR part 82, subpart G, but that is not identified in 40 CFR 86.1867-12(e), then the manufacturer could contact EPA about how to appropriately determine compliance with the leakage standard.

EPA encourages comment on all aspects of our proposed approach to HD

<sup>73</sup> Section 612(c) of the Clean Air Act requires EPA to review substitutes for class I and class II ozone-depleting substances and to determine whether such substitutes pose lower risk than other available alternatives. EPA is also required to publish lists of substitutes that it determines are acceptable and those it determines are unacceptable. See <http://www.epa.gov/ozone/snap/refrigerants/lists/index.html>, last accessed on March 5, 2015.

<sup>74</sup> Listed at 40 CFR part 82, subpart G.

<sup>75</sup> GWP values cited in this proposal are from the IPCC Fourth Assessment Report (AR4) unless stated otherwise. Where no GWP is listed in AR4, GWP values shall be determined consistent with the calculations and analysis presented in AR4 and referenced materials.

<sup>76</sup> To the extent that some manufacturers produce HD pickups and vans on the same production lines or in the same facilities as LD vehicles, some A/C system technology commonality between the two vehicle classes may be developing.



vehicle refrigerant leakage and the potential future use of alternative refrigerants for HD applications. We specifically request comment on whether there should be additional provisions that could prevent or discourage manufacturers that transition to an alternative refrigerant from discontinuing existing, low-leak A/C system components and instead reverting to higher-leakage components.

Recently, EPA proposed to change the SNAP listing for the refrigerant HFC-134a from acceptable (subject to use conditions) to unacceptable for use in A/C systems in new LD vehicles.<sup>77</sup> EPA expects to take final action on this proposed change in listing status for HFC-134a for use in new, light-duty vehicles in 2015. If the final action changes the status of HFC-134a to unacceptable, it would establish a future compliance date by which HFC-134a could no longer be used in A/C systems in newly manufactured LD vehicles; instead, all A/C systems in new LD vehicles would be required to use HFC-152a, HFO-1234yf, CO<sub>2</sub>, or any other alternative listed as acceptable for this use in the future. The current proposed rule does not address the use of HFC-134a in heavy-duty vehicles; however, EPA could consider a change of listing status for HFC-134a use in HD vehicles in the future if EPA determines that other alternatives are currently or potentially available that pose lower overall risk to human health and the environment.

#### (c) Small Business Issues

The Regulatory Flexibility Act (RFA) generally requires an agency to prepare a regulatory flexibility analysis of any rule subject to notice and comment rulemaking requirements under the Administrative Procedure Act or any other statute unless the agency certifies that the rule will not have a significant economic impact on a substantial number of small entities. See generally 5 U.S.C. Sections 601–612. The RFA analysis is discussed in Section XIV.

Pursuant to Section 609(b) of the RFA, as amended by the Small Business Regulatory Enforcement Fairness Act (SBREFA), EPA also conducted outreach to small entities and convened a Small Business Advocacy Review Panel to obtain advice and recommendations of representatives of the small entities that potentially would be subject to the rule's requirements. Consistent with the RFA/SBREFA requirements, the Panel evaluated the assembled materials and small-entity comments on issues related to elements of the IRFA. A copy of the

Panel Report is included in the docket for this proposed rule.

The agencies determined that the proposed Phase 2 regulations could have a significant economic impact on small entities. Specifically, the agencies identified four categories of directly regulated small businesses that could be impacted:

- Trailer Manufacturers
- Alternative Fuel Converters
- Vocational Chassis Manufacturers
- Glider Vehicle<sup>78</sup> Assemblers

To minimize these impacts the agencies are proposing certain regulatory flexibilities—both general and category-specific. In general, we are proposing to delay new requirements for EPA GHG emission standards by one year and simplify certification requirements for small businesses. For the proposed trailers standards, small businesses would be required to comply with EPA's standards before NHTSA's fuel efficiency standards would begin. NHTSA does not believe that providing small businesses trailer manufacturers with an additional year of delay to comply with those fuel efficiency standards would provide beneficial flexibility. The agencies are also proposing the following specific relief:

- Trailers: Proposing simpler requirements for non-box trailers, which are more likely to be manufactured by small businesses; and making third-party testing easier for certification.
- Alternative Fuel Converters: Omitting recertification of a converted vehicle when the engine is converted and certified; reduced N<sub>2</sub>O testing; and simplified onboard diagnostics and delaying required compliance with each new standard by one model year.
- Vocational Chassis: Less stringent standards for certain vehicle categories.
- Glider Vehicle Assemblers:<sup>79</sup>

Exempt existing small businesses, but limit the small business exemption to a capped level of annual production (production in excess of the capped amount would be allowed, but subject to all otherwise applicable requirements including the Phase 2 standards). These flexibilities are described in more detail in Section XIV and in the Panel Report. The agencies look forward to comments and to feedback from the

<sup>78</sup> Vehicles produced by installing a used engine into a new chassis are commonly referred to as "gliders," "glider kits," or "glider vehicles."

<sup>79</sup> EPA is proposing to amend its rules applicable to engines installed in glider kits, a proposal which would affect emission standards not only for GHGs but for criteria pollutants as well. EPA is also proposing to clarify its requirements for certification and revise its definitions for glider manufacturers. NHTSA is also considering including gliders under its Phase 2 standards.

small business community before finalizing the rule and associated flexibilities to protect small businesses.

#### (d) Confidentiality of Test Results and GEM Inputs

In accordance with Federal statutes, EPA does not release information from certification applications (or other compliance reports) that we determine to be confidential business information (CBI) under 40 CFR part 2. Consistent with the CAA, EPA does not consider emission test results to be CBI after introduction into commerce of the certified engine or vehicle. (However, we have generally treated test results as protected before the introduction into commerce date). For Phase 2, we expect to continue this policy and thus would not treat any test results or other GEM inputs as CBI after the introduction into commerce date as identified by the manufacturer. We request comment on this approach.

We consider this issue to be especially relevant for tire rolling resistance measurements. Our understanding is that tire manufacturers typically consider such results as proprietary. However, under EPA's policy, tire rolling resistance measurements are not considered to be CBI and can be released to the public after the introduction into commerce date identified by the manufacturer. We request comment on whether EPA should release such data on a regular basis to make it easier for operators to find proper replacement tires for their vehicles.

With regard to NHTSA's treatment of confidential business information, manufacturers must submit a request for confidentiality with each electronic submission specifying any part of the information or data in a report that it believes should be withheld from public disclosure as trade secret or other confidential business information. A form will be available through the NHTSA Web site to request confidentiality. NHTSA does not consider manufacturers to continue to have a business case for protecting pre-model report data after the vehicles contained within that report have been introduced into commerce.

#### (e) Delegated Assembly

In EPA's existing regulations (40 CFR 1068.261), we allow engine manufacturers to sell or ship engines that are missing certain emission-related components if those components will be installed by the vehicle manufacturer. EPA has found this provision to work well for engine manufacturers and is proposing a new provision in 40 CFR

<sup>77</sup> See 79 FR 46126, August 6, 2014.

1037.621 that would provide a similar allowance for *vehicle* manufacturers to sell or ship *vehicles* that are missing certain emission-related components if those components will be installed by a *secondary* vehicle manufacturer. As conditions of this allowance manufacturers would be required to:

- Have a contractual obligation with the secondary manufacturer to complete the assembly properly and provide instructions about how to do so.
- Keep records to demonstrate compliance.
- Apply a temporary label to the incomplete vehicles.
- Take other reasonable steps to ensure the assembly is completed properly.
- Describe in its application for certification how it will use this allowance.

We request comment on this allowance.

#### (2) Proposed Amendments to Phase 1 Program

The agencies are proposing revisions to test procedures and compliance provisions used for Phase 1. These changes are described in Section XII. As a drafting matter, EPA notes that we are proposing to migrate the GHG standards for Class 2b and 3 pickups and vans from 40 CFR 1037.104 to 40 CFR 86.1819–14. NHTSA is also proposing to amend 49 CFR part 535 to make technical corrections to its Phase 1 program to better align with EPA's compliance approach, standards and CO<sub>2</sub> performance results. In general, these changes are intended to improve the regulatory experience for regulated parties and also reduce agency administrative burden. More specifically, NHTSA proposes to change the rounding of its standards and performance values to have more significant digits. Increasing the number of significant digits for values used for compliance with NHTSA standards reduces differences in credits generated and overall credit balances for the NHTSA and EPA programs. NHTSA is also proposing to remove the petitioning process for off-road vehicles, clarify requirements for the documentation needed for submitting innovative technology requests in accordance with 40 CFR 1037.610 and 49 CFR 535.7, and add further detail to requirements for submitting credit allocation plans as specified in 49 CFR 535.9. Finally, NHTSA is adding the same record requirements that EPA currently requires to facilitate in-use compliance inspections. These changes are intended to improve the regulatory experience for

regulated parties and also reduce agency administrative burden.

#### (3) Other Proposed Amendments to EPA Regulations

EPA is proposing several amendments to regulations not directly related to the HD Phase 1 or Phase 2 programs, as detailed in Section XIII. For these amendments, there would not be corresponding changes in NHTSA regulations (since there are no such regulations relevant to those programs). Some of these relate directly to heavy-duty highway engines, but not to the GHG programs. Others relate to nonroad engines. This latter category reflects the regulatory structure EPA uses for its mobile source regulations, in which regulatory provisions applying broadly to different types of mobile sources are codified in common regulatory parts such as 40 CFR part 1068. This approach creates a broad regulatory structure that regulates highway and nonroad engines, vehicles, and equipment collectively in a common program. Thus, it is appropriate to include some proposed amendments to nonroad regulations in addition to the changes proposed only for highway engines and vehicles.

#### (a) Standards for Engines Used In Glider Kits

EPA regulations currently allow used pre-2013 engines to be installed into new glider kits without meeting currently applicable standards. As described in Section XIV, EPA is proposing to amend our regulations to allow only engines that have been certified to meet current standards to be installed in new glider kits, with two exceptions. First, engines certified to earlier MY standards that were identical to the current model year standards may be used. Second, the small manufacturer allowance described in Section I.F.(1)(c) for glider vehicles would also apply for the engines used in the exempted glider kits.

#### (b) Re-Proposal of Nonconformance Penalty Process Changes

Nonconformance penalties (NCPs) are monetary penalties established by regulation that allow a vehicle or engine manufacturer to sell engines that do not meet the emission standards. Manufacturers unable to comply with the applicable standard pay penalties, which are assessed on a per-engine basis.

On September 5, 2012, EPA adopted final NCPs for heavy heavy-duty diesel engines that could be used by manufacturers of heavy-duty diesel engines unable to meet the current

oxides of nitrogen (NO<sub>x</sub>) emission standard. On December 11, 2013 the U.S. Court of Appeals for the District of Columbia Circuit issued an opinion vacating that Final Rule. It issued its mandate for this decision on April 16, 2014, ending the availability of the NCPs for the current NO<sub>x</sub> standard, as well as vacating certain amendments to the NCP regulations due to concerns about inadequate notice. In particular, the amendments revise the text explaining how EPA determines when NCP should be made available. In this action, EPA is re-proposing most of these amendments to provide fuller notice and additional opportunity for public comment. They are discussed in Section XIV.

#### (c) Updates to Heavy-Duty Engine Manufacturer In-Use Testing Requirements

EPA and manufacturers have gained substantial experience with in-use testing over the last four or five years. This has led to important insights in ways that the test protocol can be adjusted to be more effective. We are accordingly proposing to make changes to the regulations in 40 CFR part 86, subparts N and T.

#### (d) Extension of Certain 40 CFR Part 1068 Provisions to Highway Vehicles and Engines

As part of the Phase 1 GHG standards, we applied the exemption and importation provisions from 40 CFR part 1068, subparts C and D, to heavy-duty highway engines and vehicles. We also specified that the defect reporting provisions of 40 CFR 1068.501 were optional. In an earlier rulemaking, we applied the selective enforcement auditing under 40 CFR part 1068, subpart E (75 FR 22896, April 30, 2010). We are proposing in this rule to adopt the rest of 40 CFR part 1068 for heavy-duty highway engines and vehicles, with certain exceptions and special provisions.

As described above, we are proposing to apply all the general compliance provisions of 40 CFR part 1068 to heavy-duty engines and vehicles. We propose to also apply the recall provisions and the hearing procedures from 40 CFR part 1068 for highway motorcycles and for all vehicles subject to standards under 40 CFR part 86, subpart S. We also request comment on applying the rest of the provisions from 40 CFR part 1068 to highway motorcycles and to all vehicles subject to standards under 40 CFR part 86, subpart S.

EPA is proposing to update and consolidate the regulations related to

formal and informal hearings in 40 CFR part 1068, subpart G. This would allow us to rely on a single set of regulations for all the different categories of vehicles, engines, and equipment that are subject to emission standards. We also made an effort to write these regulations for improved readability.

We are also proposing to make a number of changes to part 1068 to correct errors, to add clarification, and to make adjustments based on lessons learned from implementing these regulatory provisions.

(e) Amendments to Engine and Vehicle Test Procedures in 40 CFR Parts 1065 and 1066

EPA is proposing several changes to our engine testing procedures specified in 40 CFR part 1065. None of these changes would significantly impact the stringency of any standards.

(f) Amendments Related to Marine Diesel Engines in 40 CFR Parts 1042 and 1043

EPA's emission standards and certification requirements for marine diesel engines under the Clean Air Act and the act to Prevent Pollution from Ships are identified in 40 CFR parts 1042 and 1043, respectively. EPA is proposing to amend these regulations with respect to continuous NO<sub>x</sub> monitoring and auxiliary engines, as well as making several other minor revisions.

(g) Amendments Related to Locomotives in 40 CFR Part 1033

EPA's emission standards and certification requirements for locomotives under the Clean Air Act are identified in 40 CFR part 1033. EPA is proposing to make several minor revisions to these regulations.

(4) Other Proposed Amendments to NHTSA Regulations

NHTSA is proposing to amend 49 CFR parts 512 and 537 to allow manufacturers to submit required compliance data for the Corporate Average Fuel Economy program electronically, rather than submitting some reports to NHTSA via paper and CDs and some reports to EPA through its VERIFY database system. The agencies are coordinating on an information technology project which will allow manufacturers to submit pre-model, mid-model and final model year reports through a single electronic entry point. The agencies anticipate that this would reduce the reporting burden on manufacturers by up to fifty percent. The amendments to 49 CFR part 537 would allow reporting to an electronic

database (*i.e.* EPA's VERIFY system), and the amendments to 49 CFR part 512 would ensure that manufacturer's confidential business information would be protected through that process. This proposal is discussed further in Section XIII.

## II. Vehicle Simulation, Engine Standards and Test Procedures

### A. Introduction and Summary of Phase 1 and Phase 2 Regulatory Structures

This Section II. A. gives an overview of our vehicle simulation approach in Phase 1 and our proposed approach for Phase 2; our separate engine standards for tractor and vocational chassis in Phase 1 and our proposed separate engine standards in Phase 2; and it describes our engine and vehicle test procedures that are common among the tractor and vocational chassis standards. Section II. B. discusses in more detail how the Phase 2 proposed regulatory structure would approach vehicle simulation, separate engine standards, and test procedures. Section II. C. discusses the proposed vehicle simulation computer program, GEM, in further detail and Section II. D. discusses the proposed separate engine standards and engine test procedure. See Sections III through VI for discussions of the proposed test procedures that are unique for tractors, trailers, vocational chassis, and HD pickup trucks and vans.

In Phase 1 the agencies adopted a regulatory structure that included a vehicle simulation procedure for certifying tractors and the chassis of vocational vehicles. In contrast, the agencies adopted a full vehicle chassis dynamometer test procedure for certifying complete heavy-duty pickups and vans. The Phase 1 vehicle simulation procedure for tractors and vocational chassis requires regulated entities to use GEM to simulate and certify tractors and vocational vehicle chassis. This program is provided free of charge for unlimited use and may be downloaded by anyone from EPA's Web site: <http://www.epa.gov/otaq/climate/gem.htm>. This computer program mathematically combines vehicle component test results with other pre-determined vehicle attributes to determine a vehicle's levels of fuel consumption and CO<sub>2</sub> emissions for certification purposes. For Phase 1, the required inputs to this computer program include, for tractors, vehicle aerodynamics information, tire rolling resistance, and whether or not a vehicle is equipped with certain lightweight high-strength steel or aluminum components, a tamper-proof speed

limiter, or tamper-proof idle reduction technologies. The sole input for vocational vehicles, was tire rolling resistance. For Phase 1 the computer program's inputs did not include engine test results or attributes related to a vehicle's powertrain, namely, its transmission, drive axle(s), or tire revolutions per mile. Instead, for Phase 1 the agencies specified a generic engine and powertrain within the computer program, and for Phase 1 these cannot be changed by a program user.<sup>80</sup>

The full vehicle chassis dynamometer test procedure for heavy-duty pickups and vans substantially mirrors EPA's existing light-duty vehicle test procedure. EPA also set separate engine so-called cap standards for methane (CH<sub>4</sub>) and nitrous oxide (N<sub>2</sub>O) (essentially capping current emission levels). Compliance with the CH<sub>4</sub> and N<sub>2</sub>O standards is measured by an engine dynamometer test procedure, which EPA based on our existing heavy-duty engine emissions test procedure with small adaptations. EPA also set hydrofluorocarbon refrigerant leakage design standards for cabin air conditioning systems in tractors, pickups, and vans, which are evaluated by design rather than a test procedure.

In this action the agencies are proposing a similar regulatory structure for Phase 2, along with a number of revisions that are intended to more accurately evaluate vehicle and engine technologies' impact on real-world fuel efficiency and GHG emissions. Thus, we are proposing to continue the same certification test regime for heavy duty pickups and vans, and for the CH<sub>4</sub> and N<sub>2</sub>O standards, as well as tractor and pickup and van air conditioning leakage standards. EPA is also proposing to control vocational vehicle air conditioning leakage and to use that same certification procedure.

We are proposing to continue the vehicle simulation procedure for certifying tractors and vocational chassis, and we are proposing a new regulatory program to regulate some of the trailers hauled by tractors. The agencies are proposing the use of an equation based on the vehicle simulation procedure for trailer certification. In addition, we are proposing a simplified option for trailer certification that would not require testing to be undertaken by manufacturers to generate inputs for the equation. We are also proposing to continue separate fuel consumption and CO<sub>2</sub> standards for the engines installed

<sup>80</sup> These attributes are recognized in Phase 1 innovative technology provisions at 40 CFR 1037.610.

in tractors and vocational chassis, and we are proposing to continue to require a full vehicle chassis dynamometer test procedure for certifying complete heavy-duty pickups and vans. As described in Section II.B.(2)(b), the agencies see important advantages to maintaining separate engines standards, such as improved compliance assurance and better control during transient engine operation.

The vehicle simulation procedure necessitates some testing of engines and vehicle components to generate the inputs for the simulation tool; that is, to generate the inputs to the model which is used to certify tractors and vocational chassis. For trailers, some testing may be performed in order to generate values that are input into the simulation-based compliance equations. In addition to the testing needed for this purpose for the inputs used in the Phase 1 standards, the agencies are proposing in Phase 2 that manufacturers conduct additional required and optional engine and vehicle component tests, and proposing the additional procedures for conducting these input tests. These include a new required engine test procedure that provides steady-state engine fuel consumption and CO<sub>2</sub> inputs to represent the actual engine in a vehicle. In addition, we are seeking comment on a newly developed engine test procedure that captures transient engine performance for use in the vehicle simulation computer program. As described in detail in the draft RIA Chapter 4, we are proposing to require entering attributes that describe the vehicle's transmission type, and its number of gears and gear ratios. We are proposing an optional powertrain test procedure that would provide inputs to override the agencies' simulated engine and transmission in the vehicle simulation computer program. We are proposing to require entering attributes that describe the vehicle's drive axle(s) type and axle ratio. We are also seeking comment on an optional axle efficiency test procedure that would override the agencies' simulated axle in the vehicle simulation computer program. To improve the measurement of aerodynamic components performance, we are proposing a number of improvements to the aerodynamic coast-down test procedure and data analysis, and we are seeking comment on a newly developed constant speed aerodynamic test procedure. We are proposing that the aerodynamic test procedures for tractors be applicable to trailers when a regulated entity opts to use the GEM-based compliance equation. Additional

details about all these test procedures are found in the draft RIA Chapter 3.

We are further proposing to significantly expand the number of technologies that are recognized in the vehicle simulation computer program. These include recognizing lightweight tire thermoplastic materials, automatic tire inflation systems, advanced cruise control systems, workday idle reduction systems, and axle configurations that decrease the number of drive axles. We are seeking comment on recognizing additional technologies such as high efficiency glass and low global warming potential air conditioning refrigerants as post-process adjustments to the simulation results.

To better reflect real-world operation, we are also proposing to revise the vehicle simulation computer program's urban (55 mph) and rural (65 mph) highway duty cycles to include changes in road grade. We are seeking comment on whether or not these duty cycles should also simulate driver behavior in response to varying traffic patterns. We are proposing a new duty cycle to capture the performance of technologies that reduce the amount of time a vehicle's engine is at idle during a workday when the vehicle is not moving. And to better recognize that vocational vehicle powertrains are configured for particular applications, we are proposing to further subdivide the vocational chassis category into three different vehicle speed categories. This is in addition to the Phase 1 subdivision by three weight categories. The result is nine proposed vocational vehicle subcategories for Phase 2. The agencies are also proposing to subdivide the highest weight class of tractors into two separate categories to recognize the unique configurations and technology applicability to "heavy-haul" tractors.

Even though we are proposing to include engine test results as inputs into the vehicle simulation computer model, we are also proposing to continue the Phase 1 separate engine standard regulatory structure by proposing separate engine fuel consumption and CO<sub>2</sub> standards for engines installed in tractors and vocational chassis. For these separate engine standards, we are proposing to continue to use the Phase 1 engine dynamometer test procedure, which was adapted substantially from EPA's existing heavy-duty engine emissions test procedure. However, we are proposing to modify the weighting factors of the tractor engine's 13-point steady-state duty cycle to better reflect real-world engine operation and to reflect the trend toward operating engines at lower engine speeds during tractor cruise speed operation. Further

details on the proposed Phase 2 separate engine standards are provided below in Section II. D. In today's action EPA is proposing to continue the separate engine cap standards for methane (CH<sub>4</sub>) and nitrous oxide (N<sub>2</sub>O) emissions.

#### (1) Phase 1 Vehicle Simulation Computer Program (GEM)

For Phase 1 EPA developed a vehicle simulation computer program called, "Greenhouse gas Emissions Model" or "GEM." GEM was created for Phase 1 for the exclusive purpose of certifying tractors and vocational vehicle chassis. GEM is similar in concept to a number of other commercially available vehicle simulation computer programs. See 76 FR 57116, 57146, and 57156–57157. However, GEM is also unique in a number of ways.

Similar to other vehicle simulation computer programs, GEM combines various vehicle inputs with known physical laws and justified assumptions to predict vehicle performance for a given period of vehicle operation. For Phase 1 GEM's vehicle inputs include vehicle aerodynamics information (for tractors), tire rolling resistance, and whether or not a vehicle is equipped with lightweight materials, a tamper-proof speed limiter, or tamper-proof idle reduction technologies. Other vehicle and engine characteristics were fixed as defaults that cannot be altered by the user. These defaults included tabulated data of engine fuel rate as a function of engine speed and torque (*i.e.* "engine fuel maps"), transmissions, axle ratios, and vehicle payloads. For tractors, Phase 1 GEM models the vehicle pulling a standard trailer. For vocational vehicles, Phase 1 GEM includes a fixed aerodynamic drag coefficient and vehicle frontal area.

GEM uses the same physical principles as many other existing vehicle simulation models to derive governing equations which describe driveline components, engine, and vehicle. These equations are then integrated in time to calculate transient speed and torque. Some of the justified assumptions in GEM include average energy losses due to friction between moving parts of a vehicle's powertrain; the logical behavior of an average driver shifting from one transmission gear to the next; ad speed limit assumptions such as 55 miles per hour for urban highway driving and 65 miles per hour for rural interstate highway driving. The sequence of the GEM vehicle simulation can be visualized by imagining a human driver initially sitting in a parked running tractor or vocational vehicle. The driver then proceeds to drive the vehicle over a prescribed route that

includes three distinct patterns of driving: Stop-and-go city driving, urban highway driving, and rural interstate highway driving. The driver then exits the highway and brings the vehicle to a stop. This concludes the vehicle simulation.

Over each of the three driving patterns or “duty cycles,” GEM simulates the driver’s behavior of pressing the accelerator, coasting, or applying the brakes. GEM also simulates how the engine operates as the gears in the vehicle’s transmission are shifted and how the vehicle’s weight, aerodynamics, and tires resist the forward motion of the vehicle. GEM combines the driver behavior over the duty cycles with the various vehicle inputs and other assumptions to determine how much fuel must be consumed to move the vehicle forward at each point during the simulation. For each of the three duty cycles, GEM totals the amount of fuel consumed and then divides that amount by the product of the miles travelled and tons of payload carried. The tons of payload carried are specified by the agencies for each vehicle type and weight class. For each regulatory subcategory of tractor and vocational vehicle (*e.g.*, sleeper cab tractor, day cab tractor, small vocational vehicle, large vocational vehicle, etc.), GEM applies prescribed weighting factors to each of the three duty cycles to represent the fraction of city, urban highway, and rural highway driving that would be typical of each subcategory. After completing all the cycles, GEM outputs a single composite result for the vehicle, expressed as both fuel consumed in gallon per 1,000 ton-miles (for NHTSA standards) and an equivalent amount of CO<sub>2</sub> emitted in grams per ton-mile (for EPA standards). These are the vehicle’s GEM results that are used along with other information to demonstrate the vehicle complies with the applicable standards. This other information includes the annual sales volume of the vehicle (family) simulated in GEM, plus information on emissions credits that may be generated or used as part of that vehicle family’s certification.

While GEM is similar to other vehicle simulation computer programs, GEM is also unique in a number of ways. First, GEM was designed exclusively for regulated entities to certify tractor and vocational vehicle chassis to the agencies’ respective fuel consumption and CO<sub>2</sub> emissions standards. For GEM to be effective for this purpose, the inputs to GEM include only information related to vehicle components and attributes that significantly impact vehicle fuel efficiency and CO<sub>2</sub>

emissions. For example, these include vehicle aerodynamics, tire rolling resistance, and whether or not a vehicle is equipped with lightweight materials, a tamper-proof speed limiter, or tamper-proof idle reduction technologies. On the other hand, other attributes such as those related to a vehicle’s suspension, frame strength, or interior features are not included, where these might be included in other commercially available vehicle simulation programs for other purposes. Furthermore, the simulated driver behavior and the duty cycles cannot be changed in the GEM executable program. This helps to ensure that all vehicles are simulated and certified in the same way, but this does preclude GEM from being of much use as a research tool for exploring the effects of driver behavior and of different duty cycles.

To allow for public comment, GEM is available free of charge for unlimited use, and the GEM source code is open source. That is, the programming source code of GEM is freely available upon request for anyone to examine, manipulate, and generally use without restriction. In contrast commercially available vehicle simulation programs are generally not free and open source. Additional details of GEM are included in Chapter 4 of the RIA.

As part of Phase 1, the agencies conducted a peer review of GEM version 1.0, which was the version released for the Phase 1 proposal.<sup>81 82</sup> In response to this peer review and comments from stakeholders, EPA has made changes to GEM. The current version of GEM is v2.0.1, which is the version applicable for the Phase 1 standards.<sup>83</sup>

## (2) Phase 1 Engine Standards and Engine Test Procedure

For Phase 1 the agencies set separate engine fuel consumption and CO<sub>2</sub> standards for engines installed in tractors and vocational vehicle chassis. EPA also set separate engine cap standards for methane (CH<sub>4</sub>) and nitrous oxide (N<sub>2</sub>O) emissions. These Phase 1 engine standards are specified in terms of brake-specific (g/hp-hr) fuel, CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub>O emissions limits. For these separate engine standards, the agencies adopted an engine dynamometer test procedure, which was built

substantially from EPA’s existing heavy-duty engine emissions test procedure. Since the test procedure already specified how to measure fuel consumption, CO<sub>2</sub> and CH<sub>4</sub>, few changes were needed to employ the test procedure for purposes of the Phase 1 standards. For Phase 1 the test procedure was modified to specify how to measure N<sub>2</sub>O.

The duty cycles from EPA’s existing heavy-duty emissions test procedure were used in a somewhat unique way for Phase 1. In EPA’s non-GHG engine emissions standards, heavy-duty engines must meet brake-specific standards for emissions of total oxides of nitrogen (NO<sub>x</sub>), particulate mass (PM), non-methane hydrocarbon (NMHC), and carbon monoxide (CO). These standards must be met by all engines both over a 13-mode steady-state duty cycle called the “Supplemental Emissions Test” (SET) and over a composite of a cold-start and a hot-start transient duty cycle called the “Federal Test Procedure” (FTP). In contrast, for Phase 1 the agencies require that engines specifically installed in tractors meet fuel efficiency and CO<sub>2</sub> standards over only the SET but not the FTP. This requirement was intended to reflect that tractor engines typically operate near steady-state conditions versus transient conditions. See 76 FR 57159. The agencies adopted the converse for engines installed in vocational vehicles. That is, these engines must meet fuel efficiency and CO<sub>2</sub> standards over only the hot-start FTP but not the SET. This requirement was intended to reflect that vocational vehicle engines typically operate under transient conditions versus steady-state conditions (76 FR 57178). For both tractor and vocational vehicle engines in Phase 1, EPA set CH<sub>4</sub> and N<sub>2</sub>O emissions cap standards over the cold-start and hot-start FTP only and not over the SET duty cycle. See Section II. D. for details on how we propose to modify the engine test procedure for Phase 2.

## B. Phase 2 Proposed Regulatory Structure

For Phase 2, the agencies are proposing to modify the regulatory structure used for Phase 1. Note that we are not proposing to apply the new Phase 2 regulatory structure for compliance with the Phase 1 standards. The structure used to demonstrate compliance with the Phase 1 standards will remain as finalized in the Phase 1 regulation. The modifications we are proposing are consistent with the agencies’ Phase 1 commitments to consider a range of regulatory approaches during the development of

<sup>81</sup> See 76 FR 57146–57147.

<sup>82</sup> U.S. Environmental Protection Agency. “Peer Review of the Greenhouse Gas Emissions Model (GEM) and EPA’s Response to Comments.” EPA–420–R–11–007. Last access on November 24, 2014 at <http://www.epa.gov/otaq/climate/documents/420r11007.pdf>.

<sup>83</sup> See EPA’s Web site at <http://www.epa.gov/otaq/climate/gem.htm> for the Phase 1 GEM revision dated May 2013, made to accommodate a revision to 49 CFR 535.6(b)(3).

future regulatory efforts (76 FR 57133), especially for vehicles not already subject to full vehicle chassis dynamometer testing. For example, we committed to consider a more sophisticated approach to vehicle testing to more completely capture the complex interactions within the total vehicle, including the engine and powertrain performance. We also intended to consider the potential for full vehicle certification of complete tractors and vocational chassis using a chassis dynamometer test procedure. We also considered chassis dynamometer testing of complete tractors and vocational chassis as a complementary approach for validating a more complex vehicle simulation approach. We also committed to consider the potential for a regulatory program for some of the trailers hauled by tractors. After considering these various approaches, the agencies are proposing a structure in which regulated tractor and vocational chassis manufacturers would additionally enter engine and powertrain-related inputs into GEM, which was not allowed in Phase 1.

For trailer manufacturers, which would be subject to first-time standards under the proposal, we are also proposing GEM-based certification. However, we are proposing a simplified structure that would allow certification without the manufacturers actually running GEM. More specifically, the agencies have developed a simple equation that uses the same trailer inputs as GEM to represent the emission impacts of aerodynamic improvements, tire improvements, and weight reduction. As described in Chapter 2.10.6 of the draft RIA, these equations have nearly perfect correlation with GEM so that they can be used instead of GEM without impacting stringency.

We are proposing both required and optional test procedures to provide these additional GEM inputs. We are also proposing to significantly expand the number of technologies recognized in GEM. Further, we are proposing to modify the GEM duty cycles and to further subdivide the vocational vehicle subcategory to better represent real-world vehicle operation. In contrast to these changes, we are proposing to maintain essentially the same chassis dynamometer test procedure for certifying complete heavy-duty pickups and vans.

#### (1) Other Structures Considered

To follow-up on the commitment to consider other approaches, the agencies spent significant time and resources in evaluating six different options for

demonstrating compliance with the proposed Phase 2 standards. These six options include full vehicle chassis dynamometer testing, full vehicle simulation, and vehicle simulation in combination with powertrain testing, engine testing, engine electronic controller and/or transmission electronic controller testing. The agencies evaluated these options in terms of the capital investment required of regulated manufacturers to conduct the testing and/or simulation, the cost per test, the accuracy of the simulation, and the challenges of validating the results. Other considerations included the representativeness to the real world behavior, maintaining existing Phase 1 certification approaches that are known to work well, enhancing the Phase 1 approaches that could use improvements, the alignment of test procedures for determining GHG and non-GHG emissions compliance, and the potential to circumvent the intent of the test procedures.

Chassis dynamometer testing is used extensively in the development and certification of light-duty vehicles. It also is used in Phase 1 for complete Class 2b/3 pickups and vans, as well as for certain incomplete vehicles (at the manufacturer's option). The agencies considered chassis dynamometer testing more broadly as a heavy-duty fuel efficiency and GHG certification option because chassis dynamometer testing has the ability to evaluate a vehicle's performance in a manner that most closely resembles the vehicle's in-use performance. Nearly all of the fuel efficiency technologies can be evaluated on a chassis dynamometer, including the vehicle systems' interactions that depend on the behavior of the engine, transmission, and other vehicle electronic controllers. One challenge associated with application of wide-spread heavy-duty chassis testing is the small number of heavy-duty chassis test sites that are available in North America. As discussed in draft RIA Chapter 3, the agencies were only able to locate 11 heavy-duty chassis test sites. However, we have seen an increased interest in building new sites since issuing the Phase 1 Final Rule. For example, EPA is currently building a heavy-duty chassis dynamometer with the ability to test up to 80,000 pound vehicles at the National Vehicle and Fuel Emissions Laboratory in Ann Arbor, Michigan.

Nevertheless, the agencies continue to be concerned about proposing a chassis test procedure for certifying tractors or vocational chassis due to the initial cost of a new test facility and the large number of heavy-duty tractor and

vocational chassis variants that could require testing. We have also concluded that for heavy-duty tractors and vocational chassis, there can be increased test-to-test variability under chassis dynamometer test conditions. First, the agencies recognize that such testing requires expensive, specialized equipment that is not widely available. The agencies estimate that it would vary from about \$1.3 to \$4.0 million per new test site depending on existing facilities.<sup>84</sup> In addition, the large number of heavy-duty vehicle configurations would require significant amounts of testing to cover the sector. For example, for Phase 1 tractor manufacturers typically certified several thousand variants of one single tractor model. Finally, EPA's evaluation of heavy-duty chassis dynamometer testing has shown that the variation of chassis test results is greater than light-duty testing, up to 3 percent worse, based on our sponsored testing at Southwest Research Institute.<sup>85</sup> Although the agencies are not proposing chassis dynamometer certification of tractors and vocational chassis, we believe such an approach could be appropriate in the future for some heavy-duty vehicles if more test facilities become available and if the agencies are able to address the large number of vehicle variants that might require testing. We request comment on whether or not a chassis dynamometer test procedure should be required in lieu of the vehicle simulation approach we are proposing. Note, as discussed in Section II. C. (4) (b) that we are also proposing a modest complete tractor heavy-duty chassis dynamometer test program only for monitoring complete tractor fuel efficiency trends over the implementation timeframe of the Phase 1 and proposed Phase 2 standards.

Another option considered for certification involves testing a vehicle's powertrain in a modified engine dynamometer test facility. In this case the engine and transmission are installed in a laboratory test facility and a dynamometer is connected to the output shaft of the transmission. GEM or an equivalent vehicle simulation computer program is then used to control the dynamometer to simulate vehicle speeds and loads. The step-by-step test procedure considered for this option was initially developed as an option for hybrid powertrain testing for Phase 1. A key advantage of the powertrain test approach is that it

<sup>84</sup> 03-19034 TASK 2 Report-Paper 03-Class8\_hil\_DRAFT, September 30, 2013.

<sup>85</sup> GEM Validation, Technical Research Workshop, San Antonio, December 10-11, 2014.

directly measures the effectiveness of the engine, the transmission, and the integration of the two. Engines and transmissions are particularly challenging to simulate within a computer program like GEM because engines and transmissions installed in vehicles today are actively and interactively controlled by their own sophisticated electronic controls. These controls already contain essentially their own vehicle simulation programs that GEM would then have to otherwise simulate.

We believe that the capital investment impact for powertrain testing on manufacturers could be manageable for those that already have heavy-duty engine dynamometer test cells. We have found that in general medium-duty powertrains can be tested in heavy-duty engine test cells. EPA has successfully completed such a test facility conversion at the National Vehicle and Fuel Emissions Laboratory in Ann Arbor, Michigan. Southwest Research Institute (SwRI) in San Antonio, Texas has completed a similar test cell conversion. Oak Ridge National Laboratory in Oak Ridge, Tennessee recently completed construction of a new and specialized heavy heavy-duty powertrain dynamometer facility. EPA also contracted SwRI to evaluate North America's current capabilities for powertrain testing in the heavy-duty sector and the cost of installing a new powertrain cell that would meet agency requirements.<sup>86</sup> Results indicated that one supplier currently has this capability. We estimate that the upgrade costs to an existing engine test facility are on the order of \$1.2 million, and a new test facility in an existing building are on the order of \$1.9 million. We also estimate that current powertrain test cells that could be upgraded to measure CO<sub>2</sub> emissions would cost approximately \$600,000. For manufacturers or suppliers wishing to contract out such testing, SwRI estimated that a cost of \$150,000 would provide about one month of powertrain testing services. Once a powertrain test cell is fully operational, we estimate that for a nominal powertrain family (*i.e.* one engine family tested with one transmission family), the cost for powertrain installation, testing, and data analysis would be \$68,972.

Since the Phase 1 Final Rule, the agencies and other stakeholders have completed significant new work toward refining the powertrain test procedure itself. The proposed regulations provide

details of the refined powertrain test procedure. See 40 CFR 1037.550.

Furthermore, the agencies have worked with key transmission suppliers to develop an approach to define transmission families. Coupled with the agencies existing definitions of engine families (40 CFR 1036.230 and 1037.230), we are proposing an approach to define a powertrain family in 40 CFR 1037.231. We request comment on what key attributes should be considered when defining a transmission family.

We believe that a combination of a robust powertrain family definition, a refined powertrain test procedure and a refined GEM could become an optimal certification path that leverages the accuracy of powertrain testing along with the versatility of GEM, which alleviates the need to test a large number of vehicle or powertrain variants. To balance the potential advantages of this approach with the fact that it has never been used for vehicle certification in the past, we are proposing to allow this approach as an optional certification path, as described in Section II.B.(2)(b). To be clear, we are not proposing to require powertrain testing at this time, but because this testing would recognize additional technologies that are not recognized directly in GEM (even as proposed to be amended), we are factoring its use into our stringency considerations for vocational chassis. We request comment on whether the agencies should consider requiring powertrain testing more broadly.

Another regulatory structure option considered was engine-only testing over the GEM duty cycles over a range of simulated vehicle configurations. This approach would use GEM to generate engine duty cycles by simulating a range of transmissions and other vehicle variations. These engine duty cycles then would be programmed into a separate controller of a dynamometer connected to an engine's output shaft. Unlike the chassis dynamometer or powertrain dynamometer approaches, which could have significant test facility construction or modification costs, this approach has little capital investment impact on manufacturers because the majority already have engine test facilities to both develop engines and to certify engines to meet both the non-GHG standards and the Phase 1 fuel efficiency and GHG standards. The agencies also have been investigating this approach as an alternative way to generate data that could be used to represent an engine in GEM. Because this approach captures engine performance under transient

conditions, this approach could be an improvement over our proposed Phase 2 approach of representing an engine in GEM with only steady-state operating data. Details of this alternative are described in draft RIA. Because this approach is new and has never been used for vehicle development or certification, we are not proposing requiring its use as part of the Phase 2 certification process. However, we encourage others to investigate this new approach in detail, and we request comment on whether or not the agencies should replace our proposed steady-state operation representation of the engine in GEM with this alternative approach.

Additional certification options considered included simulating the engine, transmission, and vehicle using a computer program while having the actual transmission electronic controller connected to the computer running the vehicle simulation program. The output of the simulation would be an engine cycle that would be used to test the engine in an engine test facility. Just as in the engine-only test procedure, this procedure would not require significant capital investment in new test facilities. An additional benefit of this approach would be that the actual transmission controller would be determining the transmission gear shift points during the test, without a transmission manufacturer having to reveal their proprietary transmission control logic. This approach comes with some technical challenges, however. The model would have to become more complex and tailored to each transmission and controller to make sure that the controller would operate properly when it is connected to a computer instead of a transmission. Some examples of the transmission specific requirements would be simulating all the Controller Area Network (CAN) communication to and from the transmission controller and the specific sensor responses both through simulation and hardware. The vehicle manufacturer would have to be responsible for connecting the transmission controller to the computer, which would require a detailed verification process to ensure it is operating properly. Determining full compliance with this test procedure would be a significant challenge for the regulatory agencies because the agencies would have to be able to replicate each of the manufacturer's unique interfaces between the transmission controller and computer running GEM.

Finally, the agencies considered full vehicle simulation plus separate engine standards, which is the proposed

<sup>86</sup> 03-19034 TASK 2 Report-Paper 03-Class8\_hil\_DRAFT, September 30, 2013.



approach for Phase 2. These are discussed in more detail in the following sections.

## (2) Proposed Regulatory Structure

Under the proposed structure, tractor and vocational chassis manufacturers would be required to provide engine, transmission, drive axle(s) and tire radius inputs into GEM. For Phase 1, GEM used default values for all of these, which limited the types of technologies that could be recognized by GEM to show compliance with the standards. We are proposing to significantly expand GEM to account for a wider range of technological improvements that would otherwise need to be recognized through some off-cycle crediting approach. These include improvements to the driver controller (*i.e.*, the simulation of the driver), engines, transmissions, and axles. Additional technologies that would now be recognized in GEM also include lightweight thermoplastic materials, automatic tire inflation systems, advanced cruise control systems, engine stop-start idle reduction systems, and axle configurations that decrease the number of drive axles. The agencies are also proposing to maintain separate engine standards. As described below, we see advantages to having both engine-based and vehicle-based standards. Moreover, the advantages described here for full vehicle simulation do not necessarily correspond to disadvantages for engine testing or vice versa.

### (a) Advantages of Full Vehicle Simulation

The agencies' primary purpose in developing fuel efficiency and GHG emissions standards is to increase the use of vehicle technologies that improve fuel efficiency and decrease GHG emissions. Under the Phase 1 tractor and vocational chassis standards, there is no regulatory incentive for manufacturers to adopt new engine, transmission or axle technologies because GEM was not configured to recognize these technologies uniquely. By recognizing such technologies in GEM under Phase 2, the agencies would be creating a regulatory incentive to improve engine, transmission, and axle technologies to improve fuel efficiency and decrease GHG emissions. In its 2014 report, NAS also recognized the benefits of full vehicle simulation and recommended that Phase 2 incorporate such an approach.

We anticipate that the proposed Phase 2 approach would create three new specific regulatory incentives. First, vehicle manufacturers would have an

incentive to use the most efficient engines. Since GEM would no longer use the agency default engine in simulation manufacturers would have their own more efficient engines recognized in GEM. Under Phase 1, engine manufacturers have a regulatory incentive to design efficient engines, but vehicle manufacturers do not have a similar regulatory incentive to use efficient engines in their vehicles. Second, the proposed approach would create incentives for both engine and vehicle manufacturers to design engines and vehicles to work together to ensure that engines actually operate as much as possible near their most efficient points. This is because Phase 2 GEM would allow the vehicle manufactures to use specific transmission, axle, and tire characteristics as inputs, thus having the ability to directly recognize many powertrain integration benefits, such as downspeeding, and different transmission architectures and technologies, such as automated manual transmissions, automatic transmissions, and different numbers of transmission gears, transmission gear ratios, axle ratios and tire revolutions per mile. No matter how well designed, all engines have speed and load operation points with differing fuel efficiency and GHG emissions. The speed and load point with the best fuel efficiency (*i.e.*, peak thermal efficiency) is commonly known as the engine's "sweet spot". The more frequently an engine operates near its sweet spot, the better the vehicle's fuel efficiency will be. In Phase 1, a vehicle manufacturer receives no regulatory credit for designing its vehicle to operate closer to the sweet spot because Phase 1 GEM does not model the actual engine, transmission, axle, or tire revolutions per mile. Third, the proposed approach would recognize improvements to the overall efficiency of the drivetrain including the axle. The proposed version of GEM would recognize the benefits of different axle technologies including axle lubricants, and reducing axle losses such as by enabling three-axle vehicles to deliver power to only one rear axle through the proposed post-simulation adjustment approach (see Chapter 4.5 of the Draft RIA).

In addition to providing regulatory incentives to use more fuel efficient technologies, expanding GEM to recognize engine and other powertrain component improvements would also provide important flexibility to vehicle manufacturers. The flexibility to effectively trade engine and other component improvements against other vehicle improvements would allow

vehicle manufacturers to better optimize their vehicles to achieve the lowest cost for specific customers. Vehicle manufacturers could use this flexibility to reduce overall compliance costs and/or address special applications where certain vehicle technologies are not practical. The agencies considered in Phase 1 allowing the exchange of emission certification credits generated relative to the separate brake-specific (g/hp-hr) engine standards and credits generated relative to the vehicle standards (g/ton-mile). However, we did not allow this in Phase 1 due in part to concerns about the equivalency of credits generated relative to different standards, with different units of measure and different test procedures. The proposed approach for Phase 2 would eliminate these concerns because engine and other vehicle component improvements would be evaluated relative to the same vehicle standard in GEM. This also means that under the proposed Phase 2 approach there is no need to consider allowing emissions credit trading between engine-generated and vehicle-generated credits because vehicle manufacturers are directly credited by the combination of engine and vehicle technologies they choose to install in each vehicle. Therefore, this approach eliminates one of the concerns about continuing separate engine standards, which was that a separate engine standard and a full vehicle standard were somehow mutually exclusive. That is not the case. In fact, in the next section we describe how we propose to continue the separate engine standard along with recognizing engine performance at the vehicle level. The agencies acknowledge that maintaining a separate engine standard would limit flexibility in cases where a vehicle manufacturer wanted to use less efficient engines and make up for them using more efficient vehicle technologies. However, as described below, we see important advantages to maintaining a separate engine standard, and we believe they more than justify the reduced flexibility.

There could be disadvantages to the proposed approach, however. As is discussed in Section II.B.(2)(b), some of the disadvantages can be addressed by maintaining separate engine standards, which we are proposing to do. We request comment on other disadvantages such as those discussed below.

One disadvantage of the proposed approach is that it would increase complexity for the vehicle standards. For example, vehicle manufacturers would be required to conduct additional engine tests and track additional GEM

inputs for compliance purposes. However, we believe that most of the burden associated with this increased complexity would be an infrequent burden of engine testing and updating information systems to track these inputs.

Because GEM measures performance over specific duty cycles intended to represent average operation of vehicles in-use, the proposed approach might also create an incentive to optimize powertrains and drivetrains for the best GEM performance rather than the best in-use performance for a particular application. This is always a concern when selecting duty cycles for certification. There will always be instances, however infrequent, where specific vehicle applications will operate differently than the duty cycles used for certification. The question is would these differences force manufacturers to optimize vehicles to the certification duty cycles in a way that decreases fuel efficiency and increases GHG emissions in-use? We believe that the certification duty cycles would not prevent manufacturers from properly optimizing vehicles for customer fuel efficiency. First, the impact of the certification duty cycles would be relatively small because they affect only a small fraction of all vehicle technologies. Second, the emission averaging and fleet average provisions mean that the proposed regulations would not require all vehicles to meet the standards. Vehicles exceeding a standard over the duty cycles because they are optimized for different in-use operation can be offset by other vehicles that perform better over the certification duty cycles. Third, vehicle manufacturers would also have the ability to lower such a vehicle's measured GHG emissions by adding technology that would improve fuel efficiency both over the certification duty cycles and in-use. The proposed standards are not intended to be at a stringency where manufacturers would be expected to apply all technologies to all vehicles. Thus, there should be technologies available to add to vehicle configurations that initially fail to meet the Phase 2 proposed standards. Fourth, we are proposing further sub-categorization of the vocational vehicle segment, tripling the number of subcategories within this segment from 3 to 9. These 9 subcategories would divide each of the 3 Phase 1 weight categories into 3 additional vehicle speed categories. Each of the 3 speed categories would have unique duty cycle weighting factors to recognize that different vocational chassis are

configured for different vehicle speed applications. Furthermore, we are proposing 9 unique standards for each of the subcategories. This further subdivision better recognizes technologies' performance under the conditions for which the vocational chassis was configured to operate. This further decreases the potential of the certification duty cycles to encourage manufacturers to configure vocational chassis differently than the optimum configuration for specific customers' applications. Finally, as required by Section 202 (a) (1) and 202 (d) of the CAA, EPA is proposing specific GHG standards which would have to be met in-use.

One disadvantage of our proposed full vehicle simulation approach is the potential requirement for engine manufacturers to disclose otherwise proprietary information to vehicle manufacturers who install their engines. Under the proposed approach, vehicle manufacturers would need to know details about engine performance long before production, both for compliance planning purposes, as well as for the actual submission of applications for certification. Moreover, vehicle manufacturers would need to know details about the engine's performance that are generally not publicly available—specifically the detailed fuel consumption of an engine over many steady-state operating points. We request comment on whether or not such information could be used to “reverse engineer” intellectual property related to the proprietary design of engines, and what steps the agencies could take to address this.

The agencies also generally request comment on the advantages and disadvantages of the proposed structure that would require vehicle manufacturers to provide additional inputs into GEM to represent the engine, transmission, drive axle(s), and loaded tire radius.

#### (b) Advantages of Separate Engine Standards

For engines installed in tractors and vocational vehicle chassis, we are proposing to maintain separate engine standards for fuel consumption and GHG emissions in Phase 2 for both SI and CI engines. Moreover, we are proposing new more stringent engine standards for CI engines. While the vehicle standards alone are intended to provide sufficient incentive for improvements in engine efficiency, we continue to see important advantages to maintaining separate engine standards for both SI and CI engines. The agencies believe the advantages described below

are critical to fully achieve the goals of the NHTSA and EPA standards.

First, EPA has a robust compliance program based on engine testing. For the Phase 1 standards, we applied the existing criteria pollutant compliance program to ensure that engine efficiency in actual use reflected the improvements manufacturers claimed during certification. With engine-based standards, it is straightforward to hold engine manufacturers accountable by testing in-use engines. If the engines exceed the standards, they can be required to correct the problem or perform other remedial actions. Without separate engine standards in Phase 2, addressing in-use compliance becomes more subjective. Having clearly defined compliance responsibilities is important to both the agencies and to the market.

Second, engine standards for CO<sub>2</sub> and fuel efficiency force engine manufacturers to optimize engines for both fuel efficiency and control of non-CO<sub>2</sub> emissions at the same engine operating points. This is of special concern for NO<sub>x</sub> emissions, given the strong counter-dependency between engine-out NO<sub>x</sub> emissions and fuel consumption. By requiring engine manufacturers to comply with both NO<sub>x</sub> and CO<sub>2</sub> standards using the same test procedures, the agencies ensure that manufacturers include technologies that can be optimized for both rather than alternate calibrations that would trade NO<sub>x</sub> emissions against fuel consumption depending how the engine or vehicle is tested. In the past, when there was no CO<sub>2</sub> engine standard and no steady-state NO<sub>x</sub> standard, some manufacturers chose this dual calibration approach instead of investing in technology that would allow them to simultaneously reduce both CO<sub>2</sub> and NO<sub>x</sub>.

Third, engine fuel consumption can vary significantly between transient operation and steady-state operation, and we are proposing only steady-state engine operating data as the required engine input into GEM for both tractor and vocational chassis certification. Because vocational vehicles can spend significant operation under transient engine operation, the separate engine standard for engines installed in vocational vehicles is a transient test. Therefore, the separate engine standard for vocational engines provides the only measure of engine fuel consumption and CO<sub>2</sub> emissions under transient conditions. Without a transient engine test we would not be able to ensure control of fuel consumption and CO<sub>2</sub> emissions under transient engine conditions.

It is worth noting that these first three advantages are also beneficial for the marketplace. In these respects, the separate engine standards allow each manufacturer to be confident that its competitors are playing by the same rules. The agencies believe that the absence of a separate engine standard would leave open the possibility that a manufacturer might choose to cut corners with respect to in-use compliance margins, the NO<sub>x</sub>-CO<sub>2</sub> tradeoff, or transient controls. Concerns that competitors might take advantage of this can put a manufacturer in a difficult situation. On the other hand knowing that the agencies are ensuring all manufacturers are complying fully can eliminate these concerns.

Finally, the existence of meaningful separate engine standards allows the agencies to exempt certain vehicles from some or all of the vehicle standards and requirements without forgoing the engine improvements. A good example of this is the off-road vehicle exemption in 40 CFR 1037.631 and 49 CFR 535.3, which exempts vehicles “intended to be used extensively in off-road environments” from the vehicle requirements. The engines used in such vehicles must still meet the engine standards of 40 CFR 1036.108 and 49 CFR 535.5(d). The agencies see no reason why efficient engines cannot be used in such vehicles. However, without separate engine standards, there would be no way to require them to be efficient.

In the past there has been some confusion about the Phase 1 separate engine standards somehow preventing the recognition of engine-vehicle optimization that vehicle manufacturers perform to minimize a vehicle’s overall fuel consumption. It was not the existence of separate engine standards that prevented recognition of this optimization. Rather it was that the agencies did not allow manufacturers to enter inputs into GEM that characterized unique engine performance. For Phase 2 we are proposing to require that manufacturers input such data because we intend for GEM to recognize this engine-vehicle optimization. The continuation of separate engine standards in Phase 2 does not undermine in any way the recognition of this optimization in GEM.

The agencies request comment on the advantages and disadvantages of the proposal to maintain separate engine standards and to increase the stringency of the CI engine standards. We would also welcome suggested alternative approaches that would achieve the same goals. It is important to emphasize that the agencies see the advantages of

separate engine standards as fundamental to the success of the program and do not expect to adopt alternative approaches that fall short of these goals.

Note that commenters opposing separate engine standards should also be careful distinguish between concerns related to the stringency of the proposed engine standards, from concerns inherent to any separate engine standards whatsoever. When meeting with manufacturers prior to this proposal, the agencies heard many concerns about the potential problems with separate engines standards that were actually concerns about separate engine standards that are too stringent. However, we see these as two different issues. The agencies do recognize that setting engine standards at a high stringency could increase the cost to comply with the vehicle standard, if lower-cost vehicle technologies are available. Additionally, the agencies recognize that setting engine standards at a high stringency may promote the use of large-displacement engines, which have inherent heat transfer and efficiency advantages over smaller displacement engines over the engine test cycles, though a smaller engine may be more efficient for a given vehicle application. Thus we encourage commenters supporting the separate engine standards to address the possibility of unintended consequences such as these.

#### *C. Proposed Vehicle Simulation Model—Phase 2 GEM<sup>87</sup>*

For tractors and vocational vehicle chassis, the agencies propose that manufacturers would be required to meet vehicle-based standards, and certification to these standards would be facilitated by the required use of the vehicle simulation computer program called, “Greenhouse gas Emissions Model” or “GEM.” GEM was created for Phase 1 for the exclusive purpose of certifying tractors and vocational chassis. The agencies are proposing to modify GEM and to require vehicle manufacturers to provide additional inputs into GEM to represent the engine, transmission, drive axle(s), and loaded tire radius. For Phase 1, GEM used agency default values for all of these parameters. Under the proposed approach for Phase 2, vehicle manufacturers would be able to use these technologies, plus additional technologies to demonstrate compliance

with the applicable standards. The additional technologies include lightweight thermoplastic materials, automatic tire inflation systems, advanced cruise control systems, engine stop-start idle reduction systems, and axle configurations that decrease the number of drive axles to comply with the standards.

#### *(1) Description of the Proposed Modifications to GEM*

As explained above, GEM is a computer program that was originally developed by EPA specifically for manufacturers to use to certify to the Phase 1 tractor and vocational chassis standards. GEM mathematically combines the results of vehicle component test procedures with other vehicle attributes to determine a vehicle’s certified levels of fuel consumption and CO<sub>2</sub> emissions. For Phase 1 the required inputs to GEM include vehicle aerodynamics information, tire rolling resistance, and whether or not a vehicle is equipped with certain lightweight high-strength steel or aluminum components, a tamper-proof speed limiter, or tamper-proof idle reduction technologies for tractors. The vocational vehicle inputs to GEM for Phase 1 only included tire rolling resistance. For Phase 1 the GEM’s inputs did not include engine test results or attributes related to a vehicle’s powertrain; namely, its transmission, drive axle(s), or loaded tire radius. Instead, for Phase 1 the agencies specified a generic engine and powertrain within GEM, and for Phase 1 these cannot be changed in GEM.

For this proposal GEM has been modified and validated against a set of experimental data that represents over 130 unique vehicle variants. EPA believes this new version of GEM is an accurate and cost-effective alternative to measuring fuel consumption and CO<sub>2</sub> over a chassis dynamometer test procedure. Some of the key proposed modifications would necessitate required and optional vehicle component test procedures to generate additional GEM inputs. The results of which would provide additional inputs into GEM. These include a new required engine test procedure to provide steady-state engine fuel consumption and CO<sub>2</sub> inputs into GEM. We are also seeking comment on a newly developed engine test procedure that also captures transient engine performance for use in GEM. We are proposing to require inputs that describe the vehicle’s transmission type, and its number of gears and gear ratios. We are proposing an optional powertrain test procedure that would provide inputs to override

<sup>87</sup> The specific version of GEM used to develop the proposed standards, and which we propose to use for compliance purposes is also known as GEM 3.0.

the agencies' simulated engine and transmission in GEM. We are proposing to require inputs that describe the vehicle's drive axle(s) type (*e.g.*, 6x4 or 6x2) and axle ratio. We are also seeking comment on an optional axle efficiency test procedure to override the agencies' simulated axle in GEM. We are proposing to significantly expand the number of technologies that are recognized in GEM. These include recognizing lightweight thermoplastic materials, automatic tire inflation systems, advanced cruise control systems, engine stop-start idle reduction systems, and axle configurations that decrease the number of drive axles. We are seeking comment on recognizing (outside of the GEM simulation) additional technologies such as high efficiency glass and low global warming potential air conditioning refrigerants. To better reflect real-world operation, we are also proposing to revise the vehicle simulation computer program's urban and rural highway duty cycles to include changes in road grade. We are seeking comment on whether or not these duty cycles should also simulate driver behavior in response to varying traffic patterns. We are proposing a new duty cycle to capture the performance of technologies that reduce the amount of time a vehicle's engine is at idle during a workday when the vehicle is not moving. And to better recognize that vocational vehicle powertrains are configured for particular applications, we are proposing to further subdivide the vocational chassis category into three different vehicle speed categories, where GEM weights the individual duty cycles' results of each of the speed categories differently. Section 4.2 of the RIA details all these modifications. This section briefly describes some of the key proposed modifications to GEM.

#### (a) Simulating Engines for Vehicle Certification

Before describing the proposed approach for Phase 2, this section first reviews how engines are simulated for vehicle certification in Phase 1. GEM for Phase 1 simulates the same generic engine for any vehicle in a given regulatory subcategory with a data table of steady-state engine fuel consumption mass rates (g/s) versus a series of steady-state engine output shaft speeds (revolutions per minute, rpm) and loads (torque, N-m). This data table is also sometimes called a "fuel map" or an "engine map", although the term "engine map" can mean other kinds of data in different contexts. The engine speeds in this map range from idle to maximum governed speed and the loads range from engine motoring (negative

load) to the maximum load of an engine. When GEM runs over a vehicle duty cycle, this data table is linearly interpolated to find a corresponding fuel consumption mass rate at each engine speed and load that is demanded by the simulated vehicle operating over the duty cycle. The fuel consumption mass rate of the engine is then integrated over each duty cycle in GEM to arrive at the total mass of fuel consumed for the specific vehicle and duty cycle. Under Phase 1, manufacturers were not allowed to input their own engine fuel maps to represent their specific engines in the vehicle being simulated in GEM. Because GEM was programmed with fixed engine fuel maps for Phase 1 that all manufacturers had to use, interpolation of the tables themselves over each of the three different GEM duty cycles did not have to closely represent how an actual engine might operate over these three different duty cycles.

In contrast, for Phase 2 we are proposing a new and required steady-state engine dynamometer test procedure for manufacturers to use to generate their own engine fuel maps to represent each of their engine families in GEM. The proposed Phase 2 approach is consistent with the 2014 NAS Phase 2 First Report recommendation.<sup>88</sup> To validate this approach we compared the results from 28 individual engine dynamometer tests. Three different engines were used to generate this data, and these engines were produced by two different engine manufacturers. One engine was tested at three different power ratings (13 liters at 410, 450 & 475 hp) and one engine was tested at two ratings (6.7 liters at 240 and 300 hp), and other engine with one rating (15 liters 455 hp) service classes. For each engine and rating our proposed steady-state engine dynamometer test procedure was conducted to generate an engine fuel map to represent that particular engine in GEM. Next, with GEM we simulated various vehicles in which the engine could be installed. For each of the GEM duty cycles we are proposing, namely the urban local (ARB Transient), urban highway with road grade (55 mph), and rural highway with road grade (65 mph) duty cycles, we determined the GEM result for each vehicle configuration, and we saved the engine output shaft speed and torque information that GEM created to interpolate the steady-state engine map for each vehicle configuration. We then

had this same engine output shaft speed and torque information programmed into an engine dynamometer controller, and we had each engine perform the same duty cycles that GEM demanded of the simulated version of the engine. We then compared the GEM results based on GEM's linear interpolation of the engine maps to the measured engine dynamometer results. We concluded that for the 55 mph and 65 mph duty cycles, GEM's interpolation of the steady-state data tables was sufficiently accurate versus the measured results. This is an outcome one would reasonably expect because even with changes in road grade, the 55 mph and 65 mph duty cycles do not demand rapid changes in engine speed or load. The 55 mph and 65 mph duty cycles are nearly steady-state, as far as engine operation is concerned, just like the engine maps themselves. However, for the ARB Transient cycle, we observed a consistent bias, where GEM consistently under-predicted fuel consumption and CO<sub>2</sub> emissions. This low bias over the 28 engine tests ranged from 4.2 percent low to 7.8 percent low. The mean was 5.9 percent low and the 90th percentile value was 7.1 percent low. These observations are consistent with the fact that engines generally operate less efficiently under transient conditions than under steady-state conditions.

A number of reasons explain this consistent trend. For example, under rapidly changing engine conditions, it is generally more challenging to program an engine electronic controller to respond with optimum fuel injection rate and timing, exhaust gas recirculation valve position, variable nozzle turbo-charger vane position and other set points than it is to do so under steady-state conditions. Transient heat and mass transfer within the intake, exhaust, and combustion chambers also tend to increase turbulence and enhance energy loss to engine coolant during transient operation. Furthermore, because exhaust emissions control is more challenging under transient engine operation, engineering tradeoffs sometimes need to be made between fuel efficiency and transient emissions control. Special calibrations are typically also required to control smoke and manage exhaust temperatures during transient operation for a transient cycle. We are confident that this low bias in GEM would continue to exist well into the future if we were to test additional engines. However, with the range of the results that we have generated so far we are somewhat less confident in proposing a single numerical value to correct for this effect

<sup>88</sup> National Academy of Science. "Reducing the Fuel Consumption and GHG Emissions of Medium- and Heavy-Duty Vehicles, Phase Two, First Report." 2014. Recommendation 3.8.

over the ARB Transient duty cycle. Based on the data we have collected so far, we are conservatively proposing to apply a 5.0 percent correction factor to GEM's ARB Transient results. Note that adjustment would be applied internal to GEM, and no manufacturer input or action would be needed. This means that for GEM fuel consumption and CO<sub>2</sub> emissions results that were generated using the steady-state engine map representation of an engine in GEM, a 1.05 multiplier would be applied to only the ARB Transient result. If a manufacturer chooses to perform the optional powertrain test procedure we are proposing, then this 1.05 multiplier to the ARB Transient would not apply (since we know of no bias in that optional powertrain test). For the same reason, if we were to replace the proposed steady-state engine map in GEM with the alternative approach detailed in draft RIA, then this 1.05 multiplier would not apply. We request comment on whether or not this single value multiplier is an appropriate way to correct between steady-state and transient engine fuel consumption and CO<sub>2</sub> emissions, specifically over the ARB Transient duty cycle. We also request comment on the magnitude of the multiplier itself. For example, for the proposal we have chosen a 1.05 multiplier correction value because it is conservative but still near the mean bias we observed. However, for the tests we have conducted on current technology engines, a 1.05 multiplier would mean that about one half of these engines would be penalized by powertrain testing (or if we utilized the alternative engine approach) because the actual measured transient impact would be slightly higher than 5 percent. While these tests were performed on current technology powertrains rather than the kind of optimized powertrains we project for Phase 2, these results raise still some concerns for us. Because we intend to incentivize powertrain testing and not penalize it, and because we also encourage constructive comments on the alternative approach, we also request comment on increasing the magnitude of this ARB Transient multiplier toward the higher end of the biases we observed. For example, we request comment on increasing the proposed multiplier from 1.05 to 1.07, which is close to the 90th percentile of the results we have collected so far. Using this higher multiplier would imply that only about 10 percent of engines powertrain tested or tested under the alternative approach would show worse fuel consumption over the ARB Transient than its respective

representation in a steady-state data table in GEM. This would mean that the remaining 90 percent of engines powertrain tested would receive additional credit in GEM. Using 1.07 would essentially guarantee that any powertrain that was significantly more efficient than current powertrains would receive meaningful credit for the improvement. However, this value would also provide credits for many current powertrain designs.

We also request comment as to whether or not there might be certain vehicle sub-categories or certain small volume vocational chassis, where using the Phase 1 approach of using a generic engine table might be more appropriate. We also request comment as to whether or not the agencies should provide default generic engine maps in GEM for Phase 2 and allow manufacturers to optionally override these generic maps with their own maps, which would be generated according to our proposed engine dynamometer steady-state test procedure.

#### (b) Simulating Human Driver Behavior and Transmissions for Vehicle Certification

GEM for Phase 1 simulates the same generic human driver behavior and manual transmission for all vehicles. The simulated driver responds to changes in the target vehicle speed of the duty cycles by changing the simulated positions of the vehicle's accelerator pedal, brake pedal, clutch pedal, and gear shift lever. For simplicity in Phase 1 the GEM driver shifted at ideal points for maximum fuel efficiency and the manual transmission was simulated as an ideal transmission that did not have any delay time (*i.e.*, torque interruption) between gear shifts and did not have any energy losses associated with clutch slip during gear shifts.

In GEM for Phase 2 we are proposing to allow manufacturers to select one of three types of transmissions to represent the transmission in the vehicle they are certifying: manual transmission, automated manual transmission, and automatic transmission. We are currently in the process of developing a dual-clutch transmission type in GEM, but we are not proposing to allow its use in Phase 2 at this time. Because production of heavy-duty dual clutch transmissions has only begun in the past few months, we do not yet have any experimental data to validate our GEM simulation of this transmission type. Therefore, we are requesting comment on whether or not there is additional data available for such validation. Should such data be provided in

comments, we may finalize GEM for Phase 2 with a fourth transmission types for dual clutch transmissions. We are also considering an option to address dual clutch transmissions through a post-simulation adjustment as discussed in Chapter 4 of the draft RIA.

In the proposed modifications to GEM, the driver behavior and the three different transmission types are simulated in the same basic manner as in Phase 1, but each transmission type features a unique combination of driver behavior and transmission responses that match both the driver behavior and the transmission responses we measured during vehicle testing of these three transmission types. In general the transmission gear shifting strategy for all of the transmissions is designed to shift the transmission so that it is always in the most efficient gear for the current vehicle demand, while staying within certain limits to prevent unrealistically high frequency shifting. Some examples of these limits are torque reserve limits (which vary as function of engine speed), minimum time-in-gear and minimum fuel efficiency benefit to shift to the next gear. Some of the differences between the three transmission types include a driver "double-clutching" during gear shifts of the manual transmission only, and "power shifts" and torque converter torque multiplication, slip, and lock-up in automatic transmissions only. Refer to Chapter 4 of the draft RIA for a more detailed description of these different simulated driver behaviors and transmission types.

We considered an alternative approach where transmission manufacturers would provide vehicle manufacturers with detailed information about their automated transmissions' proprietary shift strategies for representation in GEM. NAS also recommended this approach.<sup>89</sup> The advantages of this approach include a more realistic representation of a transmission in GEM and potentially the recognition of additional fuel efficiency improving strategies to achieve additional fuel consumption and CO<sub>2</sub> emissions reductions. However, there are a number of technical and policy disadvantages of this approach. One disadvantage is that it would require the

<sup>89</sup> Transportation Research Board 2014. "Reducing the Fuel Consumption and Greenhouse Gas Emissions of Medium- and Heavy-Duty Vehicles, Phase Two." ("Phase 2 First Report") Washington, DC, The National Academies Press. Cooperative Agreement DTNH22-12-00389. Available electronically from the National Academy Press Web site at [http://www.nap.edu/catalog.php?record\\_id=12845](http://www.nap.edu/catalog.php?record_id=12845) (last accessed December 2, 2014). Recommendation 3.7.

disclosure of proprietary information between competing companies because some vehicle manufacturers produce their own transmissions and also use other suppliers' transmissions. There are technical challenges too. For example, some transmission manufacturers have upwards of 40 different shift strategies programmed into their transmission controllers. Depending on in-use driving conditions, some of which are not simulated in GEM (e.g., changing payloads, changing tire traction) a transmission controller can change its shift strategy. Representing dynamic switching between multiple proprietary shift strategies would be extremely complex to simulate in GEM. Furthermore, if the agencies were to propose requiring transmission manufacturers to provide shift strategy inputs for use in GEM, then the agencies would have to devise a compliance strategy to monitor in-use shift strategies, including a driver behavior model that could be implemented as part of an in-use shift strategy test. This too would be very complex. If manufacturers were subject to in-use compliance requirements of their transmission shift strategies, this could lead to restricting the use of certain shift strategies in the heavy-duty sector, which would in turn potentially lead to sub-optimal vehicle configurations that do not improve fuel efficiency or adequately serve the wide range of customer needs; especially in the vocational vehicle segment. For example, if the agencies were to restrict the use of more aggressive and less fuel efficient in-use shift strategies that are used only under heavy loads and steep grades, then certain vehicle applications would need to compensate for this loss of capability through the installation of over-sized and over-powered engines that are subsequently poorly matched and less efficient under lighter load conditions. Therefore, as a policy consideration to preserve vehicle configuration choice and to preserve the full capability of heavy-duty vehicles today, the agencies are intentionally not requiring transmission manufacturers to submit detailed proprietary shift strategy information to vehicle manufacturers to input into GEM. This is not unlike Phase 1, where unique transmission and axle attributes were not recognized at all in GEM. Instead, the agencies are proposing that vehicle manufacturers choose from among the three transmission types that the agencies have already developed, validated, and programmed into GEM. The vehicle manufacturers would then enter into GEM their particular

transmission's number of gears and gear ratios. The agencies recognize that designing GEM like this would exclude a potentially significant reduction from the GEM simulation. However, if a manufacturer chooses to use the optional powertrain test procedure, then the agencies' transmission types in GEM would be overridden by the actual data collected during the powertrain test, which would recognize the actual benefit of the transmission. Note that the optional powertrain test procedure is only advantageous to a vehicle manufacturer if an actual transmission is more efficient and has a superior shift strategy compared to its respective transmission type simulated in GEM.

#### (c) Simulating Axles for Vehicle Certification

In GEM for Phase 1 the axle ratio of the primary drive axle and the energy losses assumed in the simulated axle itself were the same for all vehicles. For Phase 2 we are proposing that the vehicle manufacturer input into GEM the axle ratio of the primary drive axle. This input would recognize the intent to operate the engine at a particular engine speed when the transmission is operating in its highest transmission gear; especially for the 55 mph and 65 mph duty cycles in GEM. This input facilitates GEM's recognition of vehicle designs that take advantage of operating the engine at the lowest possible engine speeds. This is commonly known as "engine down-speeding", and the general rule-of-thumb for heavy-duty engines is that for every 100 rpm decrease in engine speed, there can be about a 1 percent decrease in fuel consumption and CO<sub>2</sub> emissions. Therefore, it is important that GEM allow this value to be input by the vehicle manufacturer. Axle ratio is also straightforward to verify during any in-use compliance audit.

We are proposing a fixed axle ratio energy efficiency of 95.5 percent at all speeds and loads, but are requesting comment on whether this pre-specified efficiency is reasonable. However, we know that this efficiency actually varies as a function of axle speed and axle input torque. Therefore, as an exploratory test we have created a modified version of GEM that has as an input a data table of axle efficiency as a function of axle speed and axle torque. The modified version of GEM subsequently interpolates this table over each of the duty cycles to represent a more realistic axle efficiency at each point of each duty cycle. We have also created a draft axle ratio efficiency test procedure that requires the use of a dynamometer test facility. This

procedure includes the use of a baseline fuel-efficient synthetic gear lubricant manufactured by BASF.<sup>90</sup> This baseline will be used to gauge improvements in axle design and lubricants. The draft test procedure includes initial feedback that we have received from axle manufacturers and our own engineering judgment. Refer to 40 CFR 1037.560 of the Phase 2 proposed regulations, which contain this draft test procedure. This test procedure could be used to generate the results needed to create the axle efficiency data table for input into GEM. However, the agencies have not yet conducted experimental tests of axles using this draft test procedure so we are reluctant to propose this test procedure as either mandatory or even optional at this time. Rather we request comment as to whether or not we should finalize this test procedure and either require its use or allow its use optionally to determine an axle efficiency data table as an input to GEM, which would override the fixed axle efficiency we are proposing at this time. We also request comment on improving or otherwise refining the test procedure itself. Note that the agencies believe that allowing the GEM default axle efficiency to be replaced by manufacturer inputs only makes sense if the manufacturer inputs are the results of a specified test procedure that we could verify by our own independent testing of the axle.

In addition to proposing to require the primary drive axle ratio input into GEM (and potentially an option to input an actual axle efficiency data table), we are also proposing that the vehicle manufacturer input into GEM whether or not one or two drive axles are driven by the engine. When a heavy-duty vehicle is equipped with two rear axles where both are driven by the engine, this is called a "6x4" configuration. "6" refers to the total number of wheel hubs on the vehicle. In the 6x4 configuration there are two front wheel hubs for the two steer wheels and tires plus four rear wheel hubs for the four rear wheels and tires (or more commonly four *sets* of rear dual wheels and tires). "4" refers to the number of wheel hubs driven by the engine. These are the two rear axles that have two wheel hubs each. Compared to a 6x4 configuration a 6x2 configuration decreases axle energy loss due to friction and oil pumping in two driven axles, by driving only one axle. The decrease in fuel consumption and CO<sub>2</sub> emissions associated with a 6x2 versus 6x4 axle configuration is estimated to be

<sup>90</sup> BASF TI/EVO 0137 e, Emgard® FE 75W-90 Fuel Efficient Synthetic Gear Lubricant.

2.5 percent.<sup>91</sup> Therefore, in the proposed Phase 2 version of GEM, if a manufacturer simulates a 6x2 axle configuration, GEM decreases the overall GEM result by 2.5 percent. Note that GEM will similarly decrease the overall GEM result by 2.5 percent for a 4x2 tractor or Class 8 vocational chassis configuration if it has only two wheel hubs driven. Note that we are not proposing that GEM have an option to increase the overall GEM result by some percentage by selecting, say, a 6x6 or 8x8 option if the front axle(s) are driven. Because these configurations are only manufactured for specialized vehicles that require extra traction for off-road applications, they are very low volume sales and their increased fuel consumption and CO<sub>2</sub> emissions are not significant in comparison to the overall reductions of the proposed Phase 2 program. Note that 40 CFR 1037.631 (for off-road vocational vehicles), which is being continued from the Phase 1 program, would likely exempt many of these vehicles from the vehicle standards.

Instead of directly modeling 6x4 or 6x2 axle configuration, we are proposing use of a post-simulation adjustment approach discussed in Chapter 4 of the draft RIA to model benefits of different axle configuration.

#### (d) Simulating Accessories for Vehicle Certification

Phase 1 GEM uses a fixed power consumption value to simulate the fuel consumed for powering accessories such as power steering pumps and alternators. While the agencies are not proposing any changes to this approach for Phase 2, we are requesting comment on whether or not we should allow some manufacturer input to reflect the installation of accessory components that result in lower accessory loads. For example, we could consider an accessory load reduction GEM input based on installing a number of qualifying advanced accessory components that could be in production during Phase 2. We request comment on identifying such advanced accessory components, and we request comment on defining these components in such a way that they can be unambiguously distinguished from other similar components that do not decrease accessory loads. We also request comment on how much of a decrease in accessory load should be programmed into GEM if qualifying advanced accessory components are installed.

#### (e) Aerodynamics for Tractor, Vocational Vehicle, and Trailer Certification

For GEM in Phase 2 the agencies propose to simulate aerodynamic drag in largely the same manner as in Phase 1. For vocational chassis we propose to continue to use the same prescribed products of drag coefficient times vehicle frontal area ( $C_d \cdot A$ ) that were predefined for each of the vocational subcategories in Phase 1. For tractors we propose to continue to use an aerodynamic bin approach similar to the one that exists in Phase 1 today. This approach requires tractor manufacturers to conduct a certain amount of coast-down vehicle testing, although manufacturers have the option to conduct scaled wind tunnel testing and/or computational fluid dynamics modeling. The results of these tests determine into which bin a vehicle is assigned. Then in GEM the aerodynamic drag coefficient for each vehicle in the same bin is the same. This approach helps to account for limits in the repeatability of aerodynamic testing and it creates a compliance margin since any test result which keeps the vehicle in the same aerodynamic bin is considered compliant. However, for Phase 2 we are proposing new boundary values for the bins themselves and we are adding two additional bins in order to recognize further advances in aerodynamic drag reduction beyond what was recognized in Phase 1. Furthermore, while Phase 1 GEM used predefined frontal areas for tractors while the manufacturers input a  $C_d$  value, the agencies propose that manufacturers would use a measured drag area ( $C_d A$ ) value for each tractor configuration for Phase 2. See 40 CFR 1037.525.

In addition to these proposed changes we are proposing a number of aerodynamic drag test procedure improvements. One proposed improvement is to update the so-called standard trailer that is prescribed for use during aerodynamic drag testing of a tractor—that is, the hypothetical trailer modeled in GEM to represent a trailer paired with the tractor in actual use. In Phase 1 a non-aerodynamic 53-foot long box-shaped dry van trailer was specified as the standard trailer for tractor aerodynamic testing (see 40 CFR 1037.501(g)). For Phase 2 we are proposing to modify this standard trailer for tractor testing to make it more similar to the trailers we would require to be produced during the Phase 2 timeframe. More specifically, we would prescribe the installation of aerodynamic trailer skirts (and low rolling resistance tires as applied in

Phase 1) on the reference trailer, as discussed in further in Section III.E.2. As explained more fully in Sections III and IV below, the agencies believe that tractor-trailer pairings will be optimized aerodynamically to a significant extent in-use (such as using high-roof cabs when pulling box trailers), and that this real-world optimization should be reflected in the certification testing. We also request comment on whether or not the Phase 2 standard trailer should include the installation of other aerodynamic devices such as a nose fairing, an under tray, or a boat tail or trailer tail. Would a standard trailer including these additional components make the tractor program better?

Another proposed aerodynamic test procedure improvement is intended to better account for average wind yaw angle to better reflect the true impact of aerodynamic features on the in-use fuel consumption and CO<sub>2</sub> emissions of tractors. Refer to the proposed test procedures in 40 CFR 1037.525 for further details of these aerodynamic test procedures.

For trailer certification, the agencies are proposing to use GEM in a different way than GEM is used for tractor certification in Phase 1 and Phase 2. As described in Section IV, the proposed trailer standards are based on GEM simulation, but trailer manufacturers would not run GEM for certification. Instead, manufacturers would use a simple equation to replicate GEM performance from the inputs. As with GEM, the only technologies recognized by this GEM-based equation for trailer certification are aerodynamic technologies, tire technologies (including tire rolling resistance and automatic tire inflation systems), and some weight reduction technologies. Note that since the purpose of this equation is to measure GEM performance, it can be considered as simply another form of the model using a different input interface. Thus, for simplicity, the remainder of this Section II. C. sometimes discusses GEM as being used for trailers, without regard to how manufacturers will actually input GEM variables.

Similar to tractor certification, we propose that trailer manufacturers may at their option conduct some amount of aerodynamic testing (e.g., coast-down testing, scale wind tunnel testing, computational fluid dynamics modeling, or possibly aerodynamic component testing) and use this information with the equation.<sup>92</sup> In this

<sup>91</sup> NACFE, Executive Report—6x2 (Dead Axle) Tractors, November 2010. See Docket EPA-HQ-OAR-2014-0827.

<sup>92</sup> The agencies project that more than enough aerodynamic component vendors would take advantage of proposed optional pre-approval



case the agencies propose the configuration of a reference tractor for conducting trailer testing. Refer to Section IV of this preamble and to 40 CFR 1037.501 of the proposed regulations for details on the proposed reference tractor configuration for trailer test procedures.

(f) Tires and Tire Inflation Systems for Truck and Trailer Certification

For GEM in Phase 1 vehicle manufacturers input the tire rolling resistance of steer and drive tires directly into GEM. The agencies prescribed an internationally recognized tire rolling resistance test procedure, ISO 28580, for determining the tire rolling resistance value that is input into GEM, as described in 40 CFR 1037.520(c). For Phase 2 we are proposing to continue this same approach and the use of ISO 28580, and we propose to expand these requirements to trailer tires as well. We request comment on whether specific modifications to this test procedure would improve its accuracy, repeatability or its test lab to test lab variability.

In addition to tire rolling resistance, we are proposing that for Phase 2 vehicle manufacturers enter into GEM the tire manufacturer's specified tire loaded radius for the vehicle's drive tires. This value is commonly reported by tire manufacturers already so that vehicle speedometers can be adjusted appropriately. This input value is needed so that GEM can accurately convert simulated vehicle speed into axle speed, transmission speed, and ultimately engine speed. We request comment on whether the proposed test procedure should be modified to measure the tire's revolutions per distance directly, as opposed to using the loaded radius to calculate the drive axle rotational speed from vehicle speed.

For tractors and trailers, we propose to allow manufacturers to specify whether or not an automatic tire inflation system is installed. If one is installed, GEM, or in the case of trailers, the equations based on GEM, would assign a 1 percent decrease in the overall fuel consumption and CO<sub>2</sub> emissions simulation results for tractors, and a 1.5 percent decrease for trailers. This would be done through post-simulation adjustments discussed in Chapter 4 of the draft RIA. In contrast, we are not proposing to assign any decrease in fuel consumption and CO<sub>2</sub> emissions for tire pressure monitoring

systems. We do recognize that some drivers would respond to a warning indication from a tire pressure monitoring system, but we are unsure how to assign a fixed decrease in fuel consumption and CO<sub>2</sub> emissions for tire pressure monitoring systems. We would estimate that the value would be less than any value we would assign for an automatic tire inflation system. We request comment on whether or not we should assign a fixed decrease in fuel consumption and CO<sub>2</sub> emissions for tire pressure monitoring systems, and if so, we request comment on what would be an appropriate assigned fixed value.

(g) Weight Reduction for Tractor, Vocational Chassis and Trailer Certification

We propose for Phase 2 that GEM continues the weight reduction recognition approach in Phase 1, where the agencies prescribe fixed weight reductions, or "deltas", for using certain lightweight materials for certain vehicle components. In Phase 1 the agencies published a list of weight reductions for using high-strength steel and aluminum materials on a part by part basis. For Phase 2 we propose to use these same values for high-strength steel and aluminum parts for tractors and for trailers and we have scaled these values for use in certifying the different weight classes of vocational chassis. In addition we are proposing a similar part by part weight reduction list for tractor parts made from thermoplastic material. We are also proposing to assign a fixed weight increase to natural gas fueled vehicles to reflect the weight increase of natural gas fuel tanks versus gasoline or diesel tanks. This increase would be allocated partly to the chassis and from the payload using the same allocation as weight reductions for the given vehicle type. For tractors we are proposing to continue the same mathematical approach in GEM to assign 1/3 of a total weight decrease to a payload increase and 2/3 of the total weight decrease to a vehicle mass decrease. For Phase 1 these ratios were based on the average frequency that a tractor operates at its gross combined weight rating. Therefore, we propose to use these ratios for trailers in Phase 2. However, as with the other fuel consumption and GHG reducing technologies manufacturers use for compliance, reductions associated with weight reduction would be calculated using the trailer compliance equation rather than GEM. For vocational chassis, for which Phase 1 did not address weight reduction, we propose a 50/50 ratio. In other words, for vocational chassis in GEM we propose to assign 1/2 of a total

weight decrease to a payload increase and 1/2 of the total weight decrease to a vehicle mass decrease. We request comment on all aspects of applying weight reductions in GEM, including proposed weight increases for alternate fuel vehicles and whether a 50/50 ratio is appropriate for vocational chassis.

(h) GEM Duty Cycles for Tractor, Vocational Chassis and Trailer Certification

In Phase 1, there are three GEM vehicle duty cycles that represented stop-and-go city driving (ARB Transient), urban highway driving (55 mph), and rural interstate highway driving (65 mph). In Phase 1 these cycles were time-based. That is, they were specified as a function of simulated time and the duty cycles ended once the specified time elapsed in simulation. The agencies propose to use these three drive cycles in Phase 2, but with some revisions. First the agencies propose that GEM would simulate these cycles on a distance-based specification, rather than on a time-based specification. A distance-based specification ensures that even if a vehicle in simulation does not always achieve the target vehicle speed, the vehicle will have to continue in simulation for a longer period of time to complete the duty cycle. This ensures that vehicles are evaluated over the complete distance of the duty cycle and not just the portion of the duty cycle that a vehicle completes in a given time period. A distance-based duty cycle specification also facilitates a straightforward specification of road grade as a function of distance along the duty cycle. For Phase 2 the agencies are proposing to enhance the 55 mph and 65 mph duty cycles by adding representative road grade to exercise the simulated vehicle's engine, transmission, axle, and tires in a more realistic way. A flat road grade profile over a constant speed test does not present many opportunities for a transmission to shift gears, and may have the unintended consequence of enabling underpowered vehicles or excessively downsped drivetrains to generate credits. The road grade profile proposed is the same for both the 55 mph and 65 mph duty cycles, and the profile was based on real over-the-road testing the agencies directed under an agency-funded contract with Southwest Research Institute.<sup>93</sup> See Section III.E for more details on development of the proposed road grade profile. The agencies are continuing to evaluate

process to make trailer manufacturer testing optional.

<sup>93</sup> SwRI road grade testing and GEM validation report, 2014.

alternate road grade profiles including actual sections of restricted access highway with road grades that are statistically similar to the national road grade profile as well as purely synthetic road grade profiles.<sup>94</sup> We request comments on the proposed road grade profile, and would welcome additional statistical evaluations of this road grade profile and other road grade profiles for comparison. We believe that the enhancement of the 55 mph and 65 mph duty cycles with road grade is consistent with the NAS recommendation regarding road grade.<sup>95</sup>

We recognize that even with the proposed road grade profile, GEM may continue to under predict the number of transmission shifts of vehicles on restricted access highways if the model simulates constant speeds. We request comment on other ways in which the proposed 55 mph and 65 mph duty cycles could be enhanced. For example, we request comment on whether a more aggressive road grade profile would induce a more realistic and representative number of transmission gear shifts. We also request comment on whether we should consider varying the vehicle target speed over the 55 mph and/or 65 mph duty cycles to simulate human driver behavior reacting to traffic congestion. This would increase the number of shifts during the 55 mph and 65 mph duty cycles, though it may be possible for an equivalent effect to be

achieved by assigning a greater weighting to the transient cycle in the GEM composite test score.

#### (i) Workday Idle Operation for Vocational Vehicle Certification

In the Phase 1 program, reduction in idle emissions was recognized only for sleeper cab tractors, and only with respect to hotelling idle, where a driver needs power to operate heating, ventilation, air conditioning and other electrical equipment in order to use the sleeper cab to eat, rest, or conduct other business. As described in Section V, the agencies are now proposing to recognize in GEM technologies that reduce workday idle emissions, such as automatic stop-start systems and automatic transmissions that shift to neutral at idle. Many vocational vehicle applications operate on patterns implicating workday idle cycles, and the agencies are proposing test procedures in GEM to account specifically for these cycles and potential controls. GEM would recognize these idle controls in two ways. For technologies like neutral-idle that address idle that occurs during the transient cycle (representing the type of operation that would occur when the vehicle is stopped at a stop light), GEM would interpolate lower fuel rates from the engine map. For technologies like start-stop and auto-shutdown that eliminate some of the idle that occurs when a vehicle is stopped or parked, GEM would assign a value of zero fuel rate for what we are proposing as an “idle cycle”. This idle cycle would be weighted along with the 65 mph, 55 mph, and ARB Transient duty cycles according to the vocational chassis duty cycle weighting factors that we are proposing for Phase 2. These weighting factors are different for each of the three vocational chassis speed categories that we are proposing for Phase 2. While we are not proposing to apply this idle cycle for tractors, we do request comment on whether or not we should consider applying this idle cycle to certain tractor types, like day cabs that could experience more significant amounts of time stopped or parked as part of an urban delivery route. We also request comment on whether or not start-stop or auto-shutdown technologies are being developed for

tractors; especially for Class 7 and 8 day cabs that could experience more frequent stops and more time parked for deliveries.

#### (2) Validation of the Proposed GEM

After making the proposed changes to GEM, the agencies validated the model in comparison to over 130 vehicle variants, consistent with the recommendation made by the NAS in their Phase 2-First Report.<sup>96</sup> As is described in Chapter 4 of the Draft RIA, good agreement was observed between GEM simulations and test data over a wide range of vehicles. In general, the model simulations agreed with the test results within  $\pm 5$  percent on an absolute basis. As pointed out in Chapter 4.3.2 of the RIA, relative accuracy is more relevant to this rulemaking. This is because all of the numeric standards proposed for tractors, trailers and vocational chassis are derived from running GEM first with Phase 1 “baseline” technology packages and then with various candidate Phase 2 technology packages. The differences between these GEM results are examined to select stringencies. In other words, the agencies used the same version of GEM to establish the standards as was used to evaluate baseline performance for this rulemaking. Therefore, it is most important that GEM accurately reflects relative changes in emissions for each added technology. For vehicle certification purposes it is less important that GEM’s absolute value of the fuel consumption or CO<sub>2</sub> emissions are accurate compared to laboratory testing of the same vehicle. The ultimate purpose of this new version of GEM will be to evaluate *changes* or *additions* in technology, and compliance is demonstrated on a relative basis to the numerically standards that were also derived from GEM. Nevertheless, the agencies concluded that the absolute accuracy of GEM is generally within  $\pm 5$  percent, as shown in Figure II–1. Chapter 4.3.2 of the draft RIA shows that relative accuracy is even better,  $\pm 2$ –3 percent.

<sup>94</sup> See National Renewable Energy Laboratory report “EPA GHG Certification of Medium- and Heavy-Duty Vehicles: Development of Road Grade Profiles Representative of US Controlled Access Highways” dated May 2015 and EPA memorandum “Development of an Alternative, Nationally Representative, Activity Weighted Road Grade Profile for Use in EPA GHG Certification of Medium- and Heavy-Duty Vehicles” dated May 13, 2015, both available in Docket EPA–HQ–OAR–2014–0827. This docket also includes file NREL\_SyntheticAndLocalGradeProfiles.xlsx which contains numerical representations of all road grade profiles described in the NREL report.

<sup>95</sup> NAS 2010 Report. Page 189. “A fundamental concern raised by the committee and those who testified during our public sessions was the tension between the need to set a uniform test cycle for regulatory purposes, and existing industry practices of seeking to minimize the fuel consumption of medium and heavy-duty vehicles designed for specific routes that may include grades, loads, work tasks or speeds inconsistent with the regulatory test cycle. This highlights the critical importance of achieving fidelity between certification values and real-world results to avoid decisions that hurt rather than help real-world fuel consumption.”

<sup>96</sup> National Academy of Science. “Reducing the Fuel Consumption and GHG Emissions of Medium- and Heavy-Duty Vehicles, Phase Two, First Report.” 2014. Recommendation 1.2.

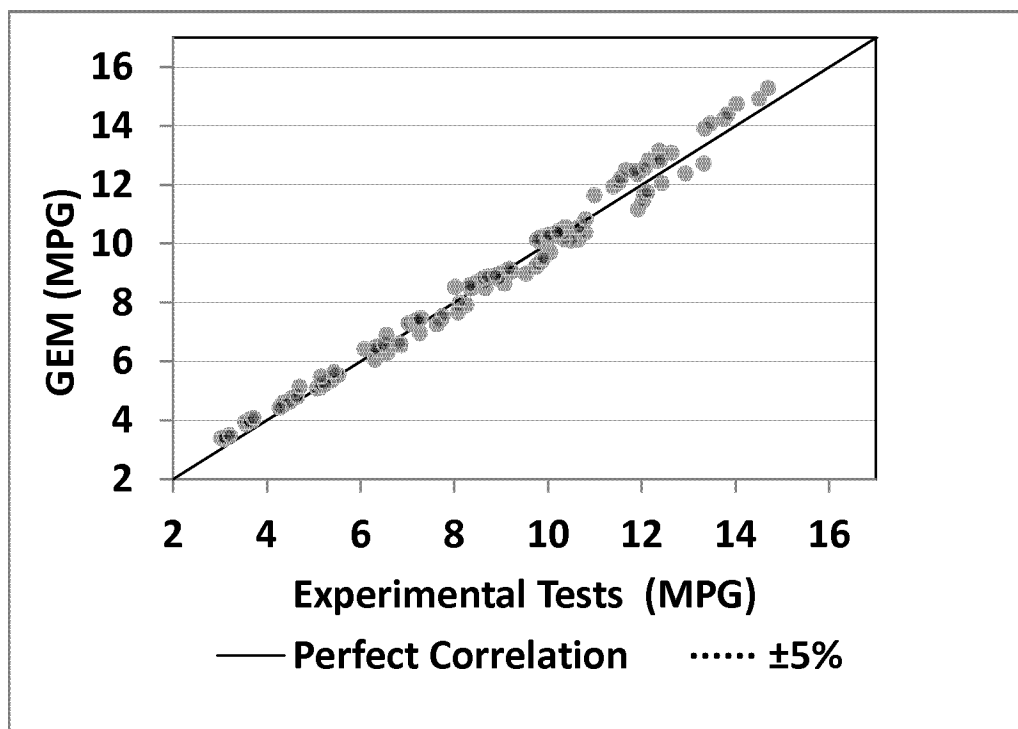


Figure II-1 GEM Validation Data

In addition to this successful validation against experimental results, the agencies have also initiated a peer review of the proposed GEM source code. This peer review has been submitted to Docket # EPA-HQ-OAR-2014-0827.

### (3) Supplements to GEM Simulation

As in Phase 1, for most tractors and vocational vehicles, compliance with the Phase 2 g/ton-mile vehicle standards could be evaluated by directly comparing the GEM result to the standard. However, in Phase 1, manufacturers incorporating innovative or advanced technologies could apply improvement factors to lower the GEM result slightly before comparing to the standard.<sup>97</sup> For example, a manufacturer incorporating a launch-assist mild hybrid that was approved for a 5 percent benefit would apply a 0.95 improvement factor to its GEM results for such vehicles. In this example, a GEM result of 300 g/ton-mile would be reduced to 285 g/ton-mile.

For Phase 2, the agencies are proposing to largely continue the existing Phase 1 innovative technology approach. We are also proposing to create a parallel option specifically related to innovative powertrain

designs. These proposals are discussed below.

#### (a) Innovative/Off-Cycle Technology Procedures

In Phase 1 the agencies adopted an emissions credit generating opportunity that applied to new and innovative technologies that reduce fuel consumption and CO<sub>2</sub> emissions, that were not in common use with heavy-duty vehicles before model year 2010 and are not reflected over the test procedures or GEM (*i.e.*, the benefits are “off-cycle”). See 76 FR 57253. As was the case in the development of Phase 1, the agencies are proposing to continue this approach for technologies and concepts with CO<sub>2</sub> emissions and fuel consumption reduction potential that might not be adequately captured over the proposed Phase 2 duty cycles or are not proposed inputs to GEM. Note, however, that the agencies are proposing to refer to these technologies as off-cycle rather than innovative. See Section I for more discussion of innovative and off-cycle technologies.

We recognize that the Phase 1 testing burden associated with the innovative technology credit provisions discouraged some manufacturers from applying. To streamline recognition of many technologies, default values have been integrated directly into GEM. For

example, automatic tire inflation systems and 6x2 axles both have fixed default values, recognized through a post-simulation adjustment approach discussed in Chapter 4 of the draft RIA. This is similar to the technology “pick list” from our light-duty programs. See 77 FR 62833–62835 (October 15, 2012). If manufacturers wish to receive additional credit beyond these fixed values, then the innovative/off-cycle technology credit provisions would provide the regulatory path toward that additional recognition.

Beyond the additional technologies that the agencies have added to GEM, the agencies also believe there are several emerging technologies that are being developed today, but would not be accounted for in GEM as we are proposing it because we do not have enough information about these technologies to assign fixed values to them in GEM. Any credits for these technologies would need to be based on the off-cycle technology credit generation provisions. These require the assessment of real-world fuel consumption and GHG reductions that can be measured with verifiable test methods using representative operating conditions typical of the engine or vehicle application.

As in Phase 1, the agencies are proposing to continue to provide two

<sup>97</sup> 40 CFR 1036.610, 1036.615, 1037.610, and 1037.615

paths for approval of the test procedure to measure the CO<sub>2</sub> emissions and fuel consumption reductions of an off-cycle technology used in the HD tractor. See 40 CFR 1037.610 and 49 CFR 535.7. The first path would not require a public approval process of the test method. A manufacturer can use “pre-approved” test methods for HD vehicles including the A-to-B chassis testing, powerpack testing or on-road testing. A manufacturer may also use any developed test procedure which has known quantifiable benefits. A test plan detailing the testing methodology is required to be approved prior to collecting any test data. The agencies are also proposing to continue the second path which includes a public approval process of any testing method which could have questionable benefits (*i.e.*, an unknown usage rate for a technology). Furthermore, the agencies are proposing to modify its provisions to better clarify the documentation required to be submitted for approval aligning them with provisions in 40 CFR 86.1869–12, and NHTSA is separately proposing to prohibit credits from technologies addressed by any of its crash avoidance safety rulemakings (*i.e.*, congestion management systems). We welcome recommendations on how to improve or streamline the off-cycle technology approval process.

Sections III and V describe tractor and vocational vehicle technologies, respectively, that the agencies anticipate may qualify for these off-cycle credit provisions.

#### (b) Powertrain Testing

The agencies are proposing a powertrain test option to allow for a robust way to quantify the benefits of CO<sub>2</sub> reducing technologies that are a part of the powertrain (conventional or hybrid) that are not captured in the GEM simulation. Powertrain testing and certification was included as one of the NAS recommendations in the Phase 2 –First Report.<sup>98</sup> Some of these improvements are transient fuel control, engine and transmission control integration and hybrid systems. To limit the amount of testing, the powertrain would be divided into families and powertrains would be tested in a limited number of simulated vehicles that cover the range of vehicles in which the powertrain would be installed. The powertrain test results would then be

used to override the engine and transmission simulation portion of GEM.

The largest proposed change from the Phase 1 powertrain procedure is that only the advanced powertrain would need to be tested (as opposed to the Phase 1 requirement where both the advanced powertrain and the conventional powertrain had to be tested). This change is possible because the proposed GEM simulation uses the engine fuel map and torque curve from the actual engine in the vehicle to be certified. For the powertrain results to be used broadly across all the vehicles that the powertrain would go into, a matrix of 8 to 9 tests would be needed per vehicle cycle. These tests would cover the range of coefficient of drag, coefficient of rolling resistance, vehicle mass and axle ratio of the vehicles that the powertrain will be installed in. The main output of this matrix of tests would be fuel mass as a function of positive work and average transmission output speed over average vehicle speed. This matrix of test results would then be used to calculate the vehicle’s CO<sub>2</sub> emissions by taking the work per ton-mile from the GEM simulation and multiplying it by the interpolated work specific fuel mass from the powertrain test and mass of CO<sub>2</sub> to mass of fuel ratio.

Along with proposing changes to how the powertrain results are used, the agencies are also proposing changes to the procedures that describe how to carry out a powertrain test. The changes are to give additional guidance on controlling the temperature of the powertrains intake-air, oil, coolant, block, head, transmission, battery, and power electronics so that they are within their expected ranges for normal operation. The equations that describe the vehicle model are proposed to be changed to allow for input of the axle’s efficiency, driveline rotational inertia, as well as the mechanical and electrical accessory loads.

The determine the positive work and average transmission output speed over average vehicle speed in GEM for the vehicle that will be certified, the agencies have defined a generic powertrain for each vehicle category. The agencies are requesting comment on if the generic powertrains should be modified according to specific aspects of the actual powertrain. For example using the engine’s rated power to scale the generic engine’s torque curve. Similarly, the transmission gear ratios could be scaled by the axle ratio of the drive axle, to make sure the generic engine is operated in GEM at the correct engine speed.

#### (4) Production Vehicle Testing for Comparison to GEM

The agencies are proposing to require tractor and vocational vehicle manufacturers to annually chassis test 5 production vehicles over the GEM cycles to verify that relative reductions simulated in GEM are being achieved in actual production. See 40 CFR 1037.665. We would not expect absolute correlation between GEM results and chassis testing. GEM makes many simplifying assumptions that do not compromise its usefulness for certification, but do cause it to produce emission rates different from what would be measured during a chassis dynamometer test. Given the limits of correlation possible between GEM and chassis testing, we would not expect such testing to accurately reflect whether a vehicle was compliant with the GEM standards. Therefore, we are proposing to not apply compliance liability to such testing. Rather, this testing would be for informational purposes only. However, we do expect there to be correlation in a relative sense. Vehicle to vehicle differences showing a 10 percent improvement in GEM should show a similar percent improvement with chassis dynamometer testing. Nevertheless, manufacturers would not be subject to recall or other compliance actions if chassis testing did not agree with the GEM results on a relative basis. Rather, the agencies would continue evaluate in-use compliance by verifying GEM inputs and testing in-use engines.

EPA believes this chassis test program is necessary because of our experience implementing regulations for heavy-duty engines. In the past, manufacturers have designed engines that have much lower emissions on the duty cycles than occur during actual use. By proposing this simple test program, we hope to be able to identify such issues earlier and to dissuade any attempts to design solely to the certification test. We also expect the results of this testing to help inform the need for any further changes to GEM.

As already noted in Section II.B.(1), it can be expensive to build chassis test cells for certification. However, EPA is proposing to structure this pilot-scale program to minimize the costs. First, we are proposing that this chassis testing would not need to comply with the same requirements as would apply for official certification testing. This would allow testing to be performed in developmental test cells with simple portable analyzers. Second, since the proposed program would require only 5 tests per year, manufacturers without

<sup>98</sup> National Academy of Science. “Reducing the Fuel Consumption and GHG Emissions of Medium- and Heavy-Duty Vehicles, Phase Two, First Report.” 2014. Recommendation 1.6. However, the agencies are not proposing to allow for the use of manufacturer derived and verified models of the powertrain within GEM.

their own chassis testing facility would be able to contract with a third party to perform the testing. Finally, EPA proposes to apply this testing to only those manufacturers with annual production in excess of 20,000 vehicles.

We request comment on this proposed testing requirement. Commenters are encouraged to suggest alternate approaches that could achieve the assurance that the projected emissions reductions would occur in actual use.

#### (5) Use of GEM in Establishing Proposed Numerical Standards

Just like in Phase 1, the agencies are proposing specific numerical standards against which tractors and vocational vehicles would be evaluated using GEM (We propose that trailers use a simplified equation-based approach that was derived from GEM). Although the proposed standards are performance-based standards, which do not specifically require the use of any particular technologies, the agencies established the proposed standards by evaluating specific vehicle technology packages using a prepublication version of the Phase 2 GEM. This prepublication version was an intermediate version of the GEM source code, rather than the executable file version of GEM, which is being docketed for this proposal and is available on EPA's GEM Web page. Both the GEM source code and the GEM executable file are generally functionally equivalent.

The agencies determined the proposed numerical standards essentially by evaluating certain specific technology packages representing the packages we are projecting to be feasible in the Phase 2 time frame. For each technology package, GEM was used to determine a cycle-weighted g/ton-mile emission rate and a gal/1,000 ton-mile fuel consumption rate. These GEM results were then essentially averaged together, weighted by the adoption rates the agencies are projecting for each technology package and for each model year of standards. Consider as an oversimplified example of two technology packages for Class 8 low-roof sleeper cabs: one package that resulted in 60 g/ton-mile and a second that resulted in 80 g/ton-mile. If we project that the first package could be applied to 50 percent of the Class 8 low-roof sleeper cab fleet in MY 2027, and that the rest of the fleet could do no better than the second technology package, then we would set the fleet average standard at 70 g/ton-mile ( $0.5 \cdot 60 + 0.5 \cdot 80 = 70$ ).

Formal external peer review and expert external user review was then conducted on the version of the GEM

source code that was used to calculate the numerical values of the proposed standards. It was discovered via these external review processes that the GEM source code contained some minor software "bugs." These bugs were then corrected by EPA and the Phase 2 proposed GEM executable file was derived from this corrected version of the GEM source code. Moreover, we expect to also receive technical comments during the comment period that could potentially identify additional GEM software bugs, which would lead EPA to make additional changes to GEM before the Final Rule. Nevertheless, EPA has repeated the analysis described above using the corrected version of the GEM source code that was used to create the proposed GEM executable file. The results of this analysis are available in the docket to this proposal.<sup>99</sup>

Thus, even without the agencies making any changes in our projections of technology effectiveness or market adoption rates, it is likely that further revisions to GEM could result in us finalizing different numerical values for the standards. It is important to note that the agencies would not necessarily consider such GEM-based numerical changes by themselves to be changes in the stringency of the standards. Rather, we believe that stringency is more appropriately evaluated in technological terms; namely, by evaluating technology effectiveness and the market adoption rates of technologies. Nevertheless, the agencies will docket any updates and supporting information in a timely manner.

#### D. Proposed Engine Test Procedures and Engine Standards

For the most part, the proposed Phase 2 engine standards are a continuation of the Phase 1 program, but with more stringent standards for compression-ignition engines. Nevertheless, the agencies are proposing important changes related to the test procedures and compliance provisions. These changes are described below.

As already discussed in Section II.B, the agencies are proposing a regulatory structure in which engine technologies are evaluated using engine-specific test procedures as well using GEM, which is vehicle-based. We are proposing separate standards for each procedure. The proposed engine standards described in Section II.D.(2) and the proposed vehicle standards described in

Sections III and V are based on the same engine technology, which is described in Section II.D.(2). We request comment on whether the engine and vehicle standards should be based on the same projected technology. As described below, while the agencies projected the same engine technology for engine standards and for vehicle standards, we separately projected the technology that would be appropriate for:

- Gasoline vocational engines and vehicles
- Diesel vocational engines and vehicles
- Tractor engines and vehicles

Before addressing the engine standards and engine technology in Section II.D.(2), the agencies describe the test procedures that would be used to evaluate these technologies in Section II.D.(1) below. We believe that without first understanding the test procedures, the numerical engine standards would not have the proper context.

#### (1) Engine Test Procedures

The Phase 1 engine standards relied on the engine test procedures specified in 40 CFR part 1065. These procedures were previously used by EPA to regulate criteria pollutants such as NO<sub>x</sub> and PM, and few changes were needed to employ them for purposes of the Phase 1 standards. The agencies are proposing significant changes to two areas for Phase 2: (1) cycle weighting; and (2) GEM inputs. (Note that EPA is also proposing some minor changes to the basic part 1065 test procedures, as described in Section XIII).

The diesel (*i.e.*, compression-ignition) engine test procedure relies on two separate engine test cycles. The first is the Heavy-duty Federal Test Procedure (Heavy-duty FTP) that includes transient operation typified by frequent accelerations and decelerations, similar to urban or suburban driving. The second is the Supplemental Engine Test (SET) which includes 13 steady-state test points. The SET was adopted by EPA to address highway cruise operation and other nominally steady-state operation. However, it is important to note that it was intended as a supplemental test cycle and not necessarily to replicate precisely any specific in-use operation.

The gasoline (*i.e.*, spark-ignition) engine test procedure relies on a single engine test cycle: a gasoline version of Heavy-duty FTP. The agencies are not proposing changes to the gasoline engine test procedures.

It is worth noting that EPA sees great value in using the same test procedures for measuring GHG emissions as is used

<sup>99</sup> See Memorandum to the Docket "Numerical Standards for Tractors, Trailers, and Vocational Vehicles Based on the June 2015 GEM Executable Code.

for measuring criteria pollutants. From the manufacturers' perspective, using the same procedures minimizes their test burden. However, EPA sees additional benefits. First, as already noted in Section(b), requiring engine manufacturers to comply with both NO<sub>x</sub> and CO<sub>2</sub> standards using the same test procedures discourages alternate calibrations that would trade NO<sub>x</sub> emissions against fuel consumption depending how the engine or vehicle is tested. Second, this approach leverages the work that went into developing the criteria pollutant cycles. Taken together, these factors support our decision to continue to rely on the 40 CFR part 1065 test procedures with only minor adjustments, such as those described in Section II.D.(1)(a). Nevertheless, EPA would consider more substantial changes if they were necessary to incentivize meaningful technology changes, similar to the changes being made to GEM for Phase 2 to address additional technologies.

#### (a) SET Cycle Weighting

The SET cycle was adopted by EPA in 2000 and modified in 2005 from a discrete-mode test to a ramped-modal cycle to broadly cover the most significant part of the speed and torque map for heavy-duty engines, defined by three non-idle speeds and three relative torques. The low speed is often called the "A speed", the intermediate speed is often called the "B speed", and the high speed is often called the "C speed." As is shown in Table II-1, the SET weights these three speeds at 23 percent, 39 percent, and 23 percent.

TABLE II-1—SET MODES WEIGHTING FACTOR IN PHASE 1

Speed, % load	Weighting factor in Phase 1 (%)
Idle .....	15
A, 100 .....	8
B, 50 .....	10
B, 75 .....	10
A, 50 .....	5
A, 75 .....	5
A, 25 .....	5
B, 100 .....	9
B, 25 .....	10
C, 100 .....	8
C, 25 .....	5
C, 75 .....	5
C, 50 .....	5
Total .....	100
Total A Speed .....	23
Total B Speed .....	39
Total C Speed .....	23

The C speed is typically in the range of 1800 rpm for current HHD engine designs. However, it is becoming less

common for engines to operate often in such a high speed in real world driving condition, and especially not during cruise vehicle speed between 55 and 65 mph. The agencies receive confidential business information from a few vehicle manufacturers that support this observation. Thus, although the current SET represents highway operation better than the FTP cycle, it is not an ideal cycle to represent future highway operation. Furthermore, given the recent trend configure drivetrains to operate engines at speeds down to a range of 1150–1200 rpm at vehicle speed of 65mph. This trend would make the typical highway engine speeds even further away from C speed.

To address this issue, the agencies are proposing new weighting factors for the Phase 2 GHG and fuel consumption standards. The proposed new SET mode weightings move most of C weighting to "A" speed, as shown in Table II-2. It would also slightly reduce the weighting factor on the idle speed.

The agencies request comment on the proposed reweighting.

TABLE II-2—PROPOSED SET MODES WEIGHTING FACTOR IN PHASE 2

Speed, % load	Proposed weighting factor in Phase 2 (%)
Idle .....	12
A, 100 .....	9
B, 50 .....	10
B, 75 .....	10
A, 50 .....	12
A, 75 .....	12
A, 25 .....	12
B, 100 .....	9
B, 25 .....	9
C, 100 .....	2
C, 25 .....	1
C, 75 .....	1
C, 50 .....	1
Total .....	100
Total A Speed .....	45
Total B Speed .....	38
Total C Speed .....	5

#### (b) Measuring GEM Engine Inputs

Although GEM does not apply directly to engine certification, implementing the Phase 2 GEM would impact engine manufacturers. To recognize the contribution of the engine in GEM the engine fuel map, full load torque curve and motoring torque curve have to be input into GEM. To insure the robustness of each of those inputs, a standard procedure has to be followed. Both the full load and motoring torque curve procedures are already defined in 40 CFR part 1065 for engine testing. However, the fuel mapping procedure being proposed would be new. The

agencies have compared the proposed procedure against other accepted engine mapping procedures with a number of engines at various labs including EPA's NVFEL, Southwest Research Institute sponsored by the agencies, and Environment Canada's laboratory.<sup>100</sup> The proposed procedure was selected because it proved to be accurate and repeatable, while limiting the test burden to create the fuel map. This proposed provision is consistent with NAS's recommendation (3.8).

One important consideration is the need to correct measured fuel consumption rates for the carbon and energy content of the test fuel. For engine tests, we propose to continue the Phase 1 approach, which is specified in 40 CFR 1036.530. We propose a similar approach to GEM fuel maps in Phase 2.

The agencies are proposing that engine manufacturers must certify fuel maps as part of their certification to the engine standards, and that they be required to provide those maps to vehicle manufacturers beginning with MY 2020.<sup>101</sup> The one exception to this requirement would be for cases in which the engine manufacturer certifies based on powertrain testing, as described in Section (c). In such cases, engine manufacturers would not be required to also certify the otherwise applicable fuel maps. We are not proposing that vehicle manufacturers be allowed to develop their own fuel maps for engines they do not manufacture.

The current engine test procedures also require the development of regeneration emission rate and frequency factors to account for the emission changes for criteria pollutants during a regeneration event. In Phase 1, the agencies adopted provisions to exclude CO<sub>2</sub> emissions and fuel consumption due to regeneration. However, for Phase 2, we propose to include CO<sub>2</sub> emissions and fuel consumption due to regeneration over the FTP and RMC cycles as determined using the infrequently regenerating aftertreatment devices (IRAF) provisions in 40 CFR 1065.680. We do not believe this would significantly impact the stringency of the proposed standards

<sup>100</sup> US EPA, "Technical Research Workshop supporting EPA and NHTSA Phase 2 Standards for MD/HD Greenhouse Gas and Fuel Efficiency—December 10 and 11, 2014," <http://www.epa.gov/otaq/climate/regs-heavy-duty.htm>.

<sup>101</sup> Current normal vehicle manufacturing processes generally result in many vehicles being produced with prior model year engines. For example, we expect that some MY 2021 vehicles will be produced with MY 2020 engines. Thus, we are proposing to require engine manufacturers to begin providing fuel maps in 2020 so that vehicle manufacturers could run GEM to certify MY 2021 vehicles with MY 2020 engines.

because manufacturers have already made great progress in reducing the impact of regeneration emissions since 2007. Nevertheless, we believe it would be prudent to begin accounting for regeneration emissions to discourage manufacturers from adopting compliance strategies that would reverse this trend. We request comment on this requirement.

We are not proposing, however, to include fuel consumption due to regeneration in the creation of the fuel map used in GEM for vehicle compliance. We believe that the proposed requirements for the duty-cycle standards, along with market forces that already exist, would create sufficient incentives to reduce fuel consumption during regeneration over the entire fuel map.

#### (c) Engine Test Procedures for Replicating Powertrain Tests

As described in Section II.B.(2)(b), the agencies are proposing a powertrain test option to quantify the benefits of CO<sub>2</sub> reducing powertrain technologies. These powertrain test results would then be used to override the engine and transmission simulation portion of GEM. The agencies are proposing to require that any manufacturer choosing to use this option also measure engine speed and engine torque during the powertrain test so that the engine's performance during the powertrain test could be replicated in a non-powertrain engine test cell. Subsequent engine testing would be conducted using the normal part 1065 engine test procedures, and g/hp-hr CO<sub>2</sub> results would be compared to the levels the manufacturer reported during certification. Such testing would apply for both confirmatory and selective enforcement audit testing.

Under the proposed regulations, engine manufacturers certifying powertrain performance (instead of or in addition to the multi-point fuel maps) would be held responsible for powertrain test results. If the engine manufacturer does not certify powertrain performance and instead certifies only the multi-point fuel maps, it would be held responsible for fuel map performance rather than the powertrain test results. Engine manufacturers certifying both would be responsible for both.

#### (d) CO<sub>2</sub> From Urea SCR Systems

For diesel engines utilizing urea SCR emission control systems for NO<sub>x</sub> reduction, the agencies are proposing to allow correction of the final engine fuel map and powertrain duty cycle CO<sub>2</sub> emission results to account for the

contribution of CO<sub>2</sub> from the urea injected into the exhaust. This urea could contribute up to 1 percent of the total CO<sub>2</sub> emissions from the engine. Since current urea production methods use gaseous CO<sub>2</sub> captured from the atmosphere (along with NH<sub>3</sub>), CO<sub>2</sub> from urea consumption does not represent a net carbon emission. This adjustment is necessary so that fuel maps developed from CO<sub>2</sub> measurements would be consistent with fuel maps from direct measurements of fuel flow rates. Thus, we are only proposing to allow this correction for emission tests where CO<sub>2</sub> emissions are determined from direct measurement of CO<sub>2</sub> and not from fuel flow measurement, which would not be impacted by CO<sub>2</sub> from urea.

We note that this correction would be voluntary for manufacturers, and expect that some manufacturers may determine that the correction is too small to be of concern. The agencies will use this correction with any engines for which the engine manufacturer applied the correction for its fuel maps during certification.

We are not proposing this correction for engine test results with respect to the engine CO<sub>2</sub> standards. Both the Phase 1 standards and the proposed standards for CO<sub>2</sub> from diesel engines are based on test results that included CO<sub>2</sub> from urea. In other words, these standards are consistent with using a test procedure that does not correct for CO<sub>2</sub> from urea. We request comment on whether it would be appropriate to allow this correction for the Phase 2 engine CO<sub>2</sub> standards, but also adjust the standards to reflect the correction. At this time, we believe that reducing the numerical value of the CO<sub>2</sub> standards by 1 g/hp-hr would make the standards consistent with measurement that are corrected for CO<sub>2</sub> from urea. However, we also request comment on the appropriateness of applying a 2 g/hp-hr adjustment should we determine it would better reflect the urea contribution for current engines.

#### (e) Potential Alternative Certification Approach

In Section II.B.(2)(b), we explained that although GEM does not apply directly to engine certification, implementing the Phase 2 GEM would impact engine manufacturers by requiring that they measure engine fuel maps. In Section II.B.(2), the agencies noted that some stakeholders may have concerns about the proposed regulatory structure that would require engine manufacturers to provide detailed fuel consumption maps for GEM. Given such concerns, the agencies are requesting comment on an approach that could

mitigate the concerns by allowing both vehicle and engine to use the same driving cycles for certification. The detailed description of this alternative certification approach can be seen in the draft RIA. We are requesting comment on allowing this approach as an option, or as a replacement to the proposed approach. Commenters supporting this approach should address possible impacts on the stringency of the proposed standards.

This approach utilizes GEM with a default engine fuel map pre-defined by the agency to run a number of pre-defined vehicle configurations over three certification cycles. Engine torque and speed profile would be obtained from the simulations, and would be used to specify engine dynamometer commands for engine testing. The results of this testing would be a CO<sub>2</sub> map as function of the integrated work and the ratio of averaged engine speed (N) to averaged vehicle speed (V) defined as (N/V) over each certification cycle. In vehicle certification, vehicle manufacturers would run GEM with the to-be-certified vehicle configuration and the agency default engine fuel map separately for each GEM cycle. Applying the total work and N/V resulted from the GEM simulations to the CO<sub>2</sub> map obtained from engine tests would determine CO<sub>2</sub> consumption for vehicle certification. For engine certification, we are considering allowing the engine to be certified based on one of the points conducted during engine alternative CO<sub>2</sub> map tests mentioned above rather than based on the FTP and SET cycle testing.

#### (2) Proposed Engine Standards for CO<sub>2</sub> and Fuel Consumption

We are proposing to maintain the existing Phase 1 regulatory structure for engine standards, which had separate standards for spark-ignition engines (such as gasoline engines) and compression-ignition engines (such as diesel engines), but we are proposing changes to how these standards would apply to natural gas fueled engines. As discussed in Section II.B.(2)(b), the agencies see important advantages to maintaining separate engine standards, such as improved compliance assurance and better control during transient engine operation.

Phase 1 also applied different test cycles depending on whether the engine is used for tractors, vocational vehicles, or both, and we propose to continue this as well.<sup>102</sup> We assume that CO<sub>2</sub> at the

<sup>102</sup> Engine classification is set forth in 40 CFR 1036.801. Spark-ignition means relating to a



end of Phase 1 is the baseline of Phase 2. Table II-3 shows the Phase 1 CO<sub>2</sub> standards for diesel engines, which

serve as the baseline for our analysis of the proposed Phase 2 standards.

TABLE II-3—PHASE 2 BASELINE CO<sub>2</sub> PERFORMANCE  
(g/bhp-hr)

LHDD-FTP	MHDD-FTP	HHDD-FTP	MHDD-SET	HHDD-SET
576	576	555	487	460

The gasoline engine baseline CO<sub>2</sub> is 627 (g/bhp-hr). The agencies used the baseline engine to assess the potential of the technologies described in the following sections. As described below, the agencies are proposing new compression-ignition engine standards for Phase 2 that would require additional reductions in CO<sub>2</sub> emissions and fuel consumption beyond the baseline. However, as also described below in Section II.B.(2)(b), we are not

proposing more stringent CO<sub>2</sub> or fuel consumption standards for new heavy-duty gasoline engines. Note, however, that we are projecting some small improvement in gasoline engine performance that would be recognized over the vehicle cycles.

For heavy-heavy-duty diesel engines to be installed in Class 7 and 8 combination tractors, the agencies are proposing the standards shown in Table II-4.<sup>103</sup> The proposed MY 2027

standards for engines installed in tractors would require engine manufacturers to achieve, on average, a 4.2 percent reduction in fuel consumption and CO<sub>2</sub> emissions beyond the Phase 1 standard. We propose to adopt interim engine standards in MY 2021 and MY 2024 that would require diesel engine manufacturers to achieve, on average, 1.5 percent and 3.7 percent reductions in fuel consumption and CO<sub>2</sub> emissions, respectively.

TABLE II-4—PROPOSED PHASE 2 HEAVY-DUTY TRACTOR ENGINE STANDARDS FOR ENGINES<sup>104</sup> OVER THE SET CYCLE

Model year	Standard	Medium heavy-duty diesel	Heavy heavy-duty diesel
2021–2023 .....	CO <sub>2</sub> (g/bhp-hr) .....	479	453
	Fuel Consumption (gallon/100 bhp-hr) .....	4.7053	4.4499
2024–2026 .....	CO <sub>2</sub> (g/bhp-hr) .....	469	443
	Fuel Consumption (gallon/100 bhp-hr) .....	4.6071	4.3517
2027 and Later .....	CO <sub>2</sub> (g/bhp-hr) .....	466	441
	Fuel Consumption (gallon/100 bhp-hr) .....	4.5776	4.3320

For compression-ignition engines fitted into vocational vehicles, the agencies are proposing MY 2027 standards that would require engine manufacturers to achieve, on average, a 4.0 percent reduction in fuel consumption and CO<sub>2</sub> emissions beyond the Phase 1 standard. We propose to

adopt interim engine standards in MY 2021 and MY 2024 that would require diesel engine manufacturers to achieve, on average, 2.0 percent and 3.5 percent reductions in fuel consumption and CO<sub>2</sub> emissions, respectively.

Table II-5 presents the CO<sub>2</sub> and fuel consumption standards the agencies

propose for compression-ignition engines to be installed in vocational vehicles. The first set of standards would take effect with MY 2021, and the second set would take effect with MY 2024.

TABLE II-5—PROPOSED VOCATIONAL DIESEL ENGINE STANDARDS OVER THE HEAVY-DUTY FTP CYCLE

Model year	Standard	Light heavy-duty diesel	Medium heavy-duty diesel	Heavy heavy-duty diesel
2021–2023 .....	CO <sub>2</sub> Standard (g/bhp-hr) .....	565	565	544
	Fuel Consumption Standard (gallon/100 bhp-hr) .....	5.5501	5.5501	5.3438
2024–2026 .....	CO <sub>2</sub> Standard (g/bhp-hr) .....	556	556	536
	Fuel Consumption (gallon/100 bhp-hr) .....	5.4617	5.4617	5.2652
2027 and Later .....	CO <sub>2</sub> Standard (g/bhp-hr) .....	553	553	533
	Fuel Consumption (gallon/100 bhp-hr) .....	5.4322	5.4322	5.2358

Although both EPA and NHTSA are proposing to begin the Phase 2 engine

standards, EPA considered proposing Phase 2 standards that would begin

before MY 2021—that is with less lead time. NHTSA is required by statute to

gasoline-fueled engine or any other type of engine with a spark plug (or other sparking device) and with operating characteristics similar to the Otto combustion cycle. However, engines that meet the definition of spark-ignition per 1036.801, but are regulated as diesel engines under 40 CFR part 86 (for criteria pollutants) are treated as compression-ignition engines for GHG standards. Compression-

ignition means relating to a type of reciprocating, internal-combustion engine that is not a spark-ignition engine, however, engines that meet the definition of compression-ignition per 1036.801, but are regulated as Otto-cycle engines under 40 CFR part 86 are treated as spark-ignition engines for GHG standards.

<sup>103</sup> The agencies note that the CO<sub>2</sub> and fuel consumption standards for Class 7 and 8 combination tractors do not cover gasoline or LHDD engines, as those are not used in Class 7 and 8 combination tractors.

<sup>104</sup> Tractor engine standards apply to all engines, without regard to the engine-cycle classification.

provide four models years of lead time, while EPA is required only to provide lead time “necessary to permit the development and application of the requisite technology” (CAA Section 202(a)(2)). However, as noted in Section I, lead time cannot be separated for other relevant factors such as costs, reliability, and stringency. Proposing these standards before 2021 could increase the risk of reliability issues in the early years. Given the limited number of engine models that each manufacturer produces, managing that many new standards would be problematic (*i.e.*, new Phase 1 standards in 2017, new Phase 2 EPA standards in 2018, 2019, or 2020, new standards in 2021, 2024, and again in 2027). Considering these challenges, EPA determined that earlier model year standards would not be appropriate, especially given the value of harmonizing the NHTSA and EPA standards.

#### (a) Feasibility of the Diesel (Compression-Ignition) Engine Standards

In this section, the agencies discuss our assessment of the feasibility of the proposed engine standards and the extent to which they would conform to our respective statutory authority and responsibilities. More details on the technologies discussed here can be found in the Draft RIA Chapter 2.3. The feasibility of these technologies is further discussed in draft RIA Chapter 2.7 for tractor and vocational vehicle engines. Note also, that the agencies are considering adopting engine standards with less lead time, and may do so in the Final Rules. These standards are discussed in Section (e).

Based on the technology analysis described below, the agencies can project a technology path exists to allow manufacturers to meet the proposed final Phase 2 standards by 2027, as well as meeting the intermediate 2021 and 2024 standards. The agencies also project that manufacturers would be able to meet these standards at a reasonable cost and without adverse impacts on in-use reliability. Note that the agencies are still evaluating whether these same standards could be met sooner, as was analyzed in Alternative 4.

In general, engine performance for CO<sub>2</sub> emissions and fuel consumption can be improved by improving combustion and reducing energy losses. More specifically, the agencies have identified the following key areas where fuel efficiency can be improved:

- Combustion optimization
- Turbocharging system

- Engine friction and other parasitic losses
- Exhaust aftertreatment
- Engine breathing system
- Engine downsizing
- Waste heat recovery
- Transient control for vocational engines only

The agencies are proposing to phase-in the standards from 2021 through 2027 so that manufacturers could gradually introduce these technologies. For most of these improvements, the agencies project manufacturers could begin applying them to about 45–50 percent of their heavy-duty engines by 2021, 90–95 percent by 2024, and ultimately apply them to 100 percent of their heavy-duty engines by 2027. However, for some of these improvements (such as waste heat recovery and engine downsizing) we project lower application rates in the Phase 2 time frame. This phase-in structure is consistent with the normal manner in which manufacturers introduce new technology to manage limited R&D budgets and well as to allow them to work with fleets to fully evaluate in-use reliability before a technology is applied fleet-wide. The agencies believe the proposed phase-in schedule would allow manufacturers to complete these normal processes. As described in Section (e), the agencies are also requesting comment on whether manufacturers could complete these development steps more quickly so that they could meet these standards sooner.

Based on our technology assessment described below, the proposed engine standards appear to be consistent with the agencies’ respective statutory authorities. All of the technologies with high penetration rates above 50 percent have already been demonstrated to some extent in the field or in research laboratories, although some development work remains to be completed. We note that our feasibility analysis for these engine standards is not based on projecting 100 percent application for any technology until 2027. We believe that projecting less than 100 percent application is appropriate and gives us additional confidence that the interim standards would be feasible.

Because this analysis considers reductions from engines meeting the Phase 1 standards, it assumes manufacturers would continue to include the same compliance margins as Phase 1. In other words, a manufacturer currently declaring FCLs 10 g/hp-hr above its measured emission rates (in order to account for production and test-to-test variability) would continue to do

the same in Phase 2. We request comment on this assumption.

The agencies have carefully considered the costs of applying these technologies, which are summarized in Section II.D.(2) (d). These costs appear to be reasonable on both a per engine basis, and when considering payback periods.<sup>105</sup> The engine technologies are discussed in more detail below. Readers are encouraged to see the draft RIA Chapter 2 for additional details (and underlying references) about our feasibility analysis.

#### (i) Combustion Optimization

Although manufacturers are making significant improvements in combustion to meet the Phase 1 engine standards, the agencies project that even more improvement would be possible after 2018. For example, improvements to fuel injection systems would allow more flexible fuel injection capability with higher injection pressure, which can provide more opportunities to improve engine fuel efficiency. Further optimization of piston bowls and injector tips would also improve engine performance and fuel efficiency. We project that a reduction of up to 1.0 percent is feasible in the 2024 model year through the use of these technologies, although it would likely apply to only 95 percent of engines until 2027.

Another important area of potential improvement is advanced engine control incorporating model based calibration to reduce losses of control during transient operation. Improvements in computing power and speed would make it possible to use much more sophisticated algorithms that are more predictive than today’s controls. Because such controls are only beneficial during transient operation, they would reduce emission over the FTP cycle, and during in-use operation, they would not reduce emissions over the SET cycle. Thus the agencies are projecting model based control reductions only for vocational engines. Although this control concept is not currently available, we project model based controls achieving a 2 percent improvement in transient emissions could be in production for some engine models by 2021. By 2027, we project over one-third of all vocational diesel engines would incorporate model-based controls.

#### (ii) Turbocharging System

Many advanced turbocharger technologies can be potentially added

<sup>105</sup> See Section IX.M for additional information about payback periods.

into production in the time frame between 2021 and 2027, and some of them are already in production, such as mechanical or electric turbo-compound, more efficient variable geometry turbine, and Detroit Diesel's patented asymmetric turbocharger. A turbo compound system extracts energy from the exhaust to provide additional power. Mechanical turbo-compounding includes a power turbine located downstream of the turbine which in turn is connected to the crankshaft to supply additional power. On-highway demonstrations of this technology began in the early 1980s. It was used first in heavy duty production by Detroit Diesel for their DD15 and DD16 engines and reportedly provided a 3 to 5 percent fuel consumption reduction. Results are duty cycle dependent, and require significant time at high load to see a fuel efficiency improvement. Light load factor vehicles can expect little or no benefit. Volvo reports two to four percent fuel consumption improvement in line haul applications, which could be in production even by 2020.

(iii) Engine Friction and Parasitic Losses

The friction associated with each moving part in an engine results in a small loss of engine power. For example, frictional losses occur at bearings, in the valvetrain, and at the piston-cylinder interface. Taken together such losses represent a large fraction of all energy lost in an engine. For Phase 1, the agencies projected a 1–2 percent reduction in fuel consumption due to friction reduction. However, new information leads us to project that an additional 1.4 percent reduction would be possible for some engines by 2021 and all engines by 2027. These reductions would be possible due to improvements in bearing materials, lubricants, and new accessory designs such as variable-speed pumps.

(iv) Aftertreatment Optimization

All diesel engines manufacturers are already using diesel particulate filter (DPF) to reduce particulate matter (PM) and selective catalytic reduction (SCR) to reduce NO<sub>x</sub> emissions. The agencies see two areas in which improved aftertreatment systems can also result in lower fuel consumption. First, increased SCR efficiency could allow re-optimization of combustion for better fuel consumption because the SCR would be capable of reducing higher engine-out NO<sub>x</sub> emissions. Second, improved designs could reduce backpressure on the engine to lower pumping losses. The agencies project the combined impact of such

improvements could be 0.6 percent or more.

(v) Engine Breathing System

Various high efficiency air handling (for both intake air and exhaust) processes could be produced in the 2020 and 2024 time frame. To maximize the efficiency of such processes, induction systems may be improved by manufacturing more efficiently designed flow paths (including those associated with air cleaners, chambers, conduit, mass air flow sensors and intake manifolds) and by designing such systems for improved thermal control. Improved turbocharging and air handling systems would likely include higher efficiency EGR systems and intercoolers that reduce frictional pressure loss while maximizing the ability to thermally control induction air and EGR. EGR systems that often rely upon an adverse pressure gradient (exhaust manifold pressures greater than intake manifold pressures) must be reconsidered and their adverse pressure gradients minimized. Other components that offer opportunities for improved flow efficiency include cylinder heads, ports and exhaust manifolds to further reduce pumping losses by about 1 percent.

(vi) Engine Downsizing

Proper sizing of an engine is an important component of optimizing a vehicle for best fuel consumption. This Phase 2 rule would improve overall vehicle efficiency, which would result in a drop in the vehicle power demand for most operation. This drop moves the vehicle operating points down to a lower load zone, which can move the engine away from the sweet spot. Engine downsizing combined with engine downsizing can allow the engine to move back to higher loads and lower speed zone, thus achieving slightly better fuel economy in the real world. However, because of the way engines are tested, little of the benefit of engine downsizing would be detected during engine testing (if power density remains the same) because the engine test cycles are normalized based on the full torque curve. Thus the current engine test is not the best way to measure the true effectiveness of engine downsizing. Nevertheless, we project that some small benefit would be measured over the engine test cycles—perhaps up to a one-quarter percent improvement in fuel consumption. Note that a bigger benefit would be observed during GEM simulation, better reflecting real world improvements. This is factored into the vehicle standards. Thus, the agencies see no reason to

fundamentally revise the engine test procedure at this time.

(vii) Waste Heat Recovery

More than 40 percent of all energy loss in an engine is lost as heat to the exhaust and engine coolant. For many years, manufacturers have been using turbochargers to convert some of the waste heat in the exhaust into usable mechanical power than is used to compress the intake air. Manufacturers have also been working to use a Rankine cycle-based system to extract additional heat energy from the engine. Such systems are often called waste heat recovery (WHR) systems. The possible sources of energy include the exhaust, recirculated exhaust gases, compressed charge air, and engine coolant. The basic approach with WHR is to use waste heat from one or more of these sources to evaporate a working fluid, which is passed through a turbine or equivalent expander to create mechanical or electrical power, then re-condensed.

Prior to the Phase 1 Final Rule, the NAS estimated the potential for WHR to reduce fuel consumption by up to 10 percent.<sup>106</sup> However, the agencies do not believe such levels would be achievable within the Phase 2 time frame. There currently are no commercially available WHR systems for diesel engines, although research prototype systems are being tested by some manufacturers. The agencies believe it is likely a commercially-viable WHR capable of reducing fuel consumption by over three percent would be available in the 2021 to 2024 time frame. Cost and complexity may remain high enough to limit the use of such systems in this time frame. Moreover, packaging constraints and transient response challenges would limit the application of WHR systems to line-haul tractors. Refer to RIA Chapter 2 for a detailed description of these systems and their applicability. The agencies project that WHR recovery could be used on 1 percent of all tractor engines by 2021, on 5 percent by 2024, and 15 percent by 2027.

The net cost and effectiveness of future WHR systems would depend on the sources of waste heat. Systems that extract heat from EGR gases may provide the side benefit of reducing the size of EGR coolers or eliminating them altogether. To the extent that WHR systems use exhaust heat, they would increase the overall cooling system heat rejection requirement and likely require larger radiators. This could have negative impacts on cooling fan power

<sup>106</sup> See 2010 NAS Report, page 57.

needs and vehicle aerodynamics. Limited engine compartment space under hood could leave insufficient room for additional radiator size increasing. On the other hand, WHR systems that extract heat from the engine coolant, could actually improve overall cooling.

(viii) Technology Packages for Diesel Engines Installed in Tractors

Typical technology packaged for diesel engines installed in tractors basically includes most technologies mentioned above, which includes

combustion optimization, turbocharging system, engine friction and other parasitic losses, exhaust aftertreatment, engine breathing system, and engine downsizing. Depending on the technology maturity of WHR and market demands, a small number of tractors could install waste heat recovery device with Rankine cycle technology. During the stringency development, the agencies received strong support from various stakeholders, where they graciously provided many confidential business information (CBI) including both technology reduction potentials

and estimated market penetrations. Combining those CBI data with the agencies' engineering judgment, Table II-4 lists those potential technologies together with the agencies' estimated market penetration for tractor engine. Those reduction values shown as "SET reduction" are relative to Phase 1 engine, which is shown in Table II-6. It should be pointed out that the stringency in Table II-6 are developed based on the proposed SET reweighting factors shown in Table II-2. The agencies welcome comment on the market penetration rates listed below.

TABLE II-6—PROJECTED TRACTOR ENGINE TECHNOLOGIES AND REDUCTION

SET mode	SET weighted reduction (%) 2020–2027	Market penetration (2021) %	Market penetration (2024) %	Market penetration (2027) %
Turbo compound with clutch .....	1.8	5	10	10
WHR (Rankine cycle) .....	3.6	1	5	15
Parasitic/Friction (Cyl Kits, pumps, FIE), lubrication .....	1.4	45	95	100
Aftertreatment (lower dP) .....	0.6	45	95	100
EGR/Intake & exhaust manifolds/Turbo/VVT/Ports .....	1.1	45	95	100
Combustion/FI/Control .....	1.1	45	95	100
Downsizing .....	0.3	10	20	30
Weighted reduction (%) .....		1.5	3.7	4.2

(ix) Technology Packages for Diesel Engines Installed in Vocational Vehicles

For compression-ignition engines fitted into vocational vehicles, the agencies are proposing MY 2021 standards that would require engine manufacturers to achieve, on average, a 2.0 percent reduction in fuel consumption and CO<sub>2</sub> emissions beyond the baseline that is the Phase 1 standard. Beginning in MY 2024, the agencies are proposing engine standards that would require diesel engine manufacturers to achieve, on average, a 3.5 percent reduction in fuel consumption and CO<sub>2</sub> emissions beyond the Phase 1 baseline standards for all diesel engines including LHD, MHD, and HHD. The agencies are proposing these standards based on the performance of reduced parasitics and friction, improved aftertreatment, combustion optimization, superchargers with VGT and bypass, model-based controls, improved EGR cooling/transport, and variable valve timing (only in LHD and MHD engines). The percent reduction for the MY2021, MY2024, and MY2027 standards is based on the combination

of technology effectiveness and market adoption rate projected.

Most of the potential engine related technologies discussed previously can be applied here. However, neither the waste heat technologies with the Rankine cycle concept nor turbo-compound would be applied into vocational sector due to the inefficient use of waste heat energy with duty cycles and applications with more transient operation than highway operation. Given the projected cost and complexity of such systems, we believe that for the Phase 2 time frame manufacturers will focus their development work on tractor applications (which would have better payback for operators) rather than vocational applications. In addition, the benefits due to engine downsizing, which can be seen in tractor engines, may not be clearly seen in vocational sector, again because this control technology produces few benefits in transient operation.

One of the most effective technologies for vocational engines is the optimization of transient control. It would be expected that more advanced

transient control including different levels of model based control and neural network control package could provide substantial benefits in vocational engines due to the extensive transient operation of these vehicles. For this technology, the use of the FTP cycle would drive engine manufacturers to invest more in transient control to improve engine efficiency. Other effective technologies would be parasitic/friction reduction, as well as improvements to combustion, air handling systems, turbochargers, and aftertreatment systems. Table II-7 below lists those potential technologies together with the agencies' projected market penetration for vocational engines. Again, similar to tractor engine, the technology reduction and market penetration are estimated by combining the CBI data together with the agencies' engineering judgment. Those reduction values shown as "FTP reduction" are relative to a Phase 2 baseline engine, which is shown in Table II-3. The weighted reductions combine the emission reduction values weighted by the market penetration of each technology).

TABLE II-7—PROJECTED VOCATIONAL ENGINE TECHNOLOGIES AND REDUCTION

Technology	GHG emissions reduction 2020–2027 %	Market penetration 2021 %	Market penetration 2024 %	Market penetration 2027 %
Model based control .....	2.0	25	30	40
Parasitic/Friction .....	1.5	60	90	100
EGR/Air/VVT/Turbo .....	1.0	50	90	100
Improved AT .....	0.5	50	90	100
Combustion Optimization .....	1.0	50	90	100
Weighted reduction (%)—L/M/HHD .....	.....	2.0	3.5	4.0

(x) Summary of the Agencies' Analysis of the Feasibility of the Proposed Diesel Engine Standards

The proposed HD Phase 2 standards are based on adoption rates for technologies that the agencies regard, subject to consideration of public comment, as the maximum feasible for purposes of EISA Section 32902(k) and appropriate under CAA Section 202(a) for the reasons given above. The agencies believe these technologies can be adopted at the estimated rates for these standards within the lead time provided, as discussed in draft RIA Chapter 2. The 2021 and 2024 MY standards are phase-in standards on the path to the 2027 MY standards and were developed using less aggressive application rates and therefore have lower technology package costs than the 2027 MY standards.

As described in Section II.D.(2)(d) below, the cost of the proposed standards is estimated to range from \$270 to \$1,698 per engine. This is slightly higher than the costs for Phase 1, which were estimated to be \$234 to \$1,091 per engine. Although the agencies did not separately determine fuel savings or emission reductions due to the engine standards apart from the vehicle program, it is expected that the fuel savings would be significantly larger than these costs, and the emission reductions would be roughly proportional to the technology costs when compared to the corresponding vehicle program reductions and costs. Thus, we regard these standards as cost-effective. This is true even without considering payback period. The proposed phase-in 2021 and 2024 MY standards are less stringent and less costly than the proposed 2027 MY standards. Given that the agencies believe the proposed standards are technologically feasible, are highly cost effective, and highly cost effective when accounting for the fuel savings, and have no apparent adverse potential impacts (e.g., there are no projected negative impacts on safety or vehicle

utility), the proposed standards appear to represent a reasonable choice under Section 202(a) of the CAA and the maximum feasible under NHTSA's EISA authority at 49 U.S.C. 32902(k)(2).

(b) Basis for Continuing the Phase 1 Spark-Ignited Engine Standard

Today most SI-powered vocational vehicles are sold as incomplete vehicles by a vertically integrated chassis manufacturer, where the incomplete chassis shares most of the same technology as equivalent complete pickups or vans, including the powertrain. The number of such incomplete SI-powered vehicles is small compared to the number of completes. Another, even less common way that SI-powered vocational vehicles are built is by a non-integrated chassis manufacturer purchasing an engine from a company that also produces complete and/or incomplete HD pickup trucks and vans. The resulting market structure leads manufacturers of heavy-duty SI engines to have little market incentive to develop separate technology for vocational engines that are engine-certified. Moreover, the agencies have not identified a single SI engine technology that we believe belongs on engine-certified vocational engines that we do not also project to be used on complete heavy-duty pickups and vans.

In light of this market structure, when the agencies considered the feasibility of more stringent Phase 2 standards for SI vocational engines, we identified the following key questions:

1. Will there be technologies available that could reduce in-use emissions from vocational SI engines?

2. Would these technologies be applied to complete vehicles and carried-over to engine certified engines without a new standard?

3. Would these technologies be applied to meet the vehicle-based standards described in Section V?

4. What are the drawbacks associated with setting a technology-forcing Phase 2 standard for SI engines?

With respect to the first and second questions, as noted in Chapter 2.6 of the draft RIA, the agencies have identified improved lubricants, friction reduction, and cylinder deactivation as technologies that could potentially reduce in-use emissions from vocational engines; and the agencies have further determined that to the extent these technologies would be viable for complete vehicles, they would also be applied to engine-certified engines. Nevertheless, significant uncertainty remains about how much benefit would be provided by these technologies. It is possible that the combined impact of these technologies would be one percent or less. With respect to the third question, we believe that to the extent these technologies are viable and effective, they would be applied to meet the vehicle-based standards for vocational vehicles.

At this time, it appears the fourth question regarding drawbacks is the most important. The agencies could propose a technology forcing standard for vocational SI engines based on a projection of each of these technologies being effective for these engines. However, as already noted in Section I, the agencies see value in setting the standards at levels that would not require every projected technology to work as projected. Effectively requiring technologies to match our current projections would create the risk that the standards would not be feasible if even a single one of technologies failed to match our projections. This risk is amplified for SI engines because of the very limited product offerings, which provide far fewer opportunities for averaging than exist for CI engines. Given the relatively small improvement projected, and the likelihood that most or all of this improvement would result anyway from the complete pickup and van standards and the vocational vehicle-based standards, we do not believe such risk is justified or needed. The approach the agencies are proposing accomplishes the same objective without the attendant

potential risk. With this approach, the Phase 1 SI engine standard for these engines would remain in place, and engine improvements would be reflected in the stringency of the vehicle standard for the vehicle in which the engine would be installed. Nevertheless, we request comment on the merits of adopting a more stringent SI engine standard in the 2024 to 2027 time frame, including comment on technologies, adoption rates, and effectiveness over the engine cycle that could support adoption of a more stringent standard. Please see Section V.C of this preamble for a description of the SI engine technologies that have been considered in developing the proposed vocational vehicle standards. Please see Section VI.C of this preamble for a description of the SI engine technologies that have been considered in developing the proposed HD pickup truck and van standards.

#### (c) Engine Improvements Projected for Vehicles over the GEM Duty Cycles

Because we are proposing that tractor and vocational vehicle manufacturers represent their vehicles' actual engines in GEM for vehicle certification, the agencies aligned our *engine* technology effectiveness assessments for both the separate engine standards and the tractor and vocational vehicle standards for each of the regulatory alternatives considered. This was an important step because we are proposing to recognize the same engine technologies in both the separate engine standards and the vehicle standards, which each have different test procedures for demonstrating compliance. As explained earlier in Section II. D. (1), compliance with the tractor separate engine standards is determined from a composite of the Supplemental Engine Test (SET) procedure's 13 steady-state operating points. Compliance with the vocational vehicle separate engine standards is determined over the Federal Test Procedure's (FTP) transient engine duty cycle. In contrast, compliance with the vehicle standards is determined using GEM, which calculates composite results over a combination of 55 mph and 65 mph steady-state vehicle cycles and the ARB Transient vehicle cycle. Note that we are also proposing a new workday idle cycle for vocational vehicles. Each of these duty cycles emphasizes different engine operating points; therefore, they can each recognize certain technologies differently.

Our first step in aligning our engine technology assessment at both the engine and vehicle levels was to start with an analysis of how we project each

technology to impact performance at each of the 13 individual test points of the SET steady-state engine duty cycle. For example, engine friction reduction technology would be expected to have the greatest impact at the highest engine speeds, where frictional energy losses are the greatest. As another example, turbocharger technology is generally optimized for best efficiency at steady-state cruise vehicle speed. For an engine this is near its lower peak-torque speed and at a moderately high load that still offers sufficient torque reserve to climb modest road grades without frequent transmission gear shifting. The agencies also considered the combination of certain technologies causing synergies and dis-synergies with respect to engine efficiency at each of these test points. See RIA Chapter 2 for further details.

Next we estimated unique brake-specific fuel consumption values for each of the 13 SET test points for two hypothetical MY2018 tractor engines that would be compliant with the Phase 1 standards. These were a 15 liter displacement 455 horsepower engine and an 11 liter 350 horsepower engine. We then added technologies to these engines that we determined were feasible for MY2021, MY2024, and MY 2027, and we determined unique improvements at each of the 13 SET points. We then calculated composite SET values for these hypothetical engines and determined the SET improvements that we could use to propose more stringent separate tractor engine standards for MY2021, MY2024, and MY 2027.

To align our engine technology analysis for vehicles to the SET engine analysis described above, we then fit a surface equation through each engine's SET points versus engine speed and load to approximate their analogous fuel maps that would represent these same engines in GEM. Because the 13 SET test points do not fully cover an engine's wide range of possible operation, we also determined improvements for an additional 6 points of engine operation to improve the creation of GEM fuel maps for these engines. Then for each of these 8 tractor engines (two each for MY2018, MY2021, MY2024, and MY2027) we ran GEM simulations to represent low-, mid-, and high-roof sleeper cabs and low-, mid-, and high-roof day cabs. Class 8 tractors were assumed for the 455 horsepower engine and Class 7 tractors (day cabs only) were assumed for the 350 horsepower engine. Each GEM simulation calculated results for the 55 mph, 65 mph, and ARB Transient cycles, as well as the composite GEM value associated with each of the tractor types. After factoring

in our Alternative 3 projected market penetrations of the engine technologies, we then compared the percent improvements that the same sets of engine technology caused over the separate engines' SET composites and the various vehicles' GEM composites. Compared to their respective MY2018 baseline engines, the two engines of different horsepower showed the same percent improvements. All of the tractor cab types showed nearly the same relative improvements too. For example, for the MY2021 Alternative 3 engine technology package in a high roof sleeper tractor, the SET engine composites showed a 1.5 percent improvement and the GEM composites a 1.6 percent improvement. For the MY2024 Alternative 3 engine technology packages, the SET engine composites showed a 3.7 percent improvement and the GEM composites a 3.7 percent improvement. For MY2027 Alternative 3 engine technology packages, the SET engine composites showed a 4.2 percent improvement and the GEM composites a 4.2 percent improvement. We therefore concluded that tractor engine technologies will improve engines and tractors proportionally, even though the separate engine and vehicle certification test procedures have different duty cycles.

We then repeated this same process for the FTP engine transient cycle and the GEM vocational vehicle types. For the vocational engine analysis we investigated four engines: 15 liter displacement engine at 455 horsepower rating, 11 liter displacement engine at 345 horsepower rating, a 7 liter displacement engine at a 200 horsepower rating and a 270 horsepower rating. These engines were then used in GEM over the light-heavy, medium-heavy, and heavy-heavy vocational vehicle configurations. Because the technologies were assumed to impact each point of the FTP in the same way, the results for all engines and vehicles were 2.0 percent improvement in MY2021, 3.5 percent improvement in MY2024, and 4.0 percent improvement in MY2027. Therefore, we arrived at the same conclusion that vocational vehicle engine technologies are recognized at the same percent improvement over the FTP as the GEM cycles. We request comment on our approach to arrive at this conclusion.

#### (d) Engine Technology Package Costs for Tractor and Vocational Engines (and Vehicles)

As described in Chapters 2 and 7 of the draft RIA, the agencies estimated costs for each of the engines technologies discussed here. All costs

are presented relative to engines projected to comply with the model year 2017 standards—*i.e.*, relative to our baseline engines. Note that we are not presenting any costs for gasoline engines (SI engines) because we are not proposing to change the standards.

Our engine cost estimates include a separate analysis of the incremental part costs, research and development activities, and additional equipment. Our general approach used elsewhere in this action (for HD pickup trucks, gasoline engines, Class 7 and 8 tractors, and Class 2b-8 vocational vehicles) estimates a direct manufacturing cost for a part and marks it up based on a factor to account for indirect costs. *See also* 75 FR 25376. We believe that approach is appropriate when compliance with proposed standards is achieved generally by installing new parts and systems purchased from a supplier. In such a case, the supplier is conducting the bulk of the research and development on the new parts and systems and including those costs in the purchase price paid by the original equipment manufacturer. The indirect

costs incurred by the original equipment manufacturer need not include much cost to cover research and development since the bulk of that effort is already done. For the MHD and HHD diesel engine segment, however, the agencies believe that OEMs will incur costs not associated with the purchase of parts or systems from suppliers or even the production of the parts and systems, but rather the development of the new technology by the original equipment manufacturer itself. Therefore, the agencies have directly estimated additional indirect costs to account for these development costs. The agencies used the same approach in the Phase 1 HD rule. EPA commonly uses this approach in cases where significant investments in research and development can lead to an emission control approach that requires no new hardware. For example, combustion optimization may significantly reduce emissions and cost a manufacturer millions of dollars to develop but would lead to an engine that is no more expensive to produce. Using a bill of materials approach would suggest that

the cost of the emissions control was zero reflecting no new hardware and ignoring the millions of dollars spent to develop the improved combustion system. Details of the cost analysis are included in the draft RIA Chapter 2. To reiterate, we have used this different approach because the MHD and HHD diesel engines are expected to comply in part via technology changes that are not reflected in new hardware but rather reflect knowledge gained through laboratory and real world testing that allows for improvements in control system calibrations—changes that are more difficult to reflect through direct costs with indirect cost multipliers. Note that these engines are also expected to incur new hardware costs as shown in Table II–8 through Table II–11. EPA also developed the incremental piece cost for the components to meet each of the 2021 and 2024 standards. The costs shown in Table II–12 include a low complexity ICM of 1.15 and assume the flat-portion of the learning curve is applicable to each technology.

(i) Tractor Engine Package Costs

TABLE II–8—PROPOSED MY2021 TRACTOR DIESEL ENGINE COMPONENT COSTS INCLUSIVE OF INDIRECT COST MARKUPS AND ADOPTION RATES (2012\$)

	Medium HD	Heavy HD
Aftertreatment system (improved effectiveness SCR, dosing, DPF) .....	\$7	\$7
Valve Actuation .....	82	82
Cylinder Head (flow optimized, increased firing pressure, improved thermal management) .....	3	3
Turbocharger (improved efficiency) .....	9	9
Turbo Compounding .....	50	50
EGR Cooler (improved efficiency) .....	2	2
Water Pump (optimized, variable vane, variable speed) .....	43	43
Oil Pump (optimized) .....	2	2
Fuel Pump (higher working pressure, increased efficiency, improved pressure regulation) .....	2	2
Fuel Rail (higher working pressure) .....	5	5
Fuel Injector (optimized, improved multiple event control, higher working pressure) .....	5	5
Piston (reduced friction skirt, ring and pin) .....	1	1
Valvetrain (reduced friction, roller tappet) .....	39	39
Waste Heat Recovery .....	105	105
“Right sized” engine .....	–40	–40
Total .....	314	314

**Note:** “Right sized” diesel engine is a smaller, less costly engine than the engine it replaces.

TABLE II–9—PROPOSED MY2024 TRACTOR DIESEL ENGINE COMPONENT COSTS INCLUSIVE OF INDIRECT COST MARKUPS AND ADOPTION RATES (2012\$)

	Medium HD	Heavy HD
Aftertreatment system (improved effectiveness SCR, dosing, DPF) .....	\$14	\$14
Valve Actuation .....	166	166
Cylinder Head (flow optimized, increased firing pressure, improved thermal management) .....	6	6
Turbocharger (improved efficiency) .....	17	17
Turbo Compounding .....	92	92
EGR Cooler (improved efficiency) .....	3	3
Water Pump (optimized, variable vane, variable speed) .....	84	84
Oil Pump (optimized) .....	4	4
Fuel Pump (higher working pressure, increased efficiency, improved pressure regulation) .....	4	4
Fuel Rail (higher working pressure) .....	9	9
Fuel Injector (optimized, improved multiple event control, higher working pressure) .....	10	10
Piston (reduced friction skirt, ring and pin) .....	3	3
Valvetrain (reduced friction, roller tappet) .....	75	75



TABLE II-9—PROPOSED MY2024 TRACTOR DIESEL ENGINE COMPONENT COSTS INCLUSIVE OF INDIRECT COST MARKUPS AND ADOPTION RATES (2012\$)—Continued

	Medium HD	Heavy HD
Waste Heat Recovery .....	502	502
“Right sized” engine .....	– 85	– 85
Total .....	904	904

**Note:** “Right sized” diesel engine is a smaller, less costly engine than the engine it replaces.

TABLE II-10—PROPOSED MY2027 TRACTOR DIESEL ENGINE COMPONENT COSTS INCLUSIVE OF INDIRECT COST MARKUPS AND ADOPTION RATES (2012\$)

	Medium HD	Heavy HD
Aftertreatment system (improved effectiveness SCR, dosing, DPF) .....	\$14	\$14
Valve Actuation .....	169	169
Cylinder Head (flow optimized, increased firing pressure, improved thermal management) .....	6	6
Turbocharger (improved efficiency) .....	17	17
Turbo Compounding .....	87	87
EGR Cooler (improved efficiency) .....	3	3
Water Pump (optimized, variable vane, variable speed) .....	84	84
Oil Pump (optimized) .....	4	4
Fuel Pump (higher working pressure, increased efficiency, improved pressure regulation) .....	4	4
Fuel Rail (higher working pressure) .....	9	9
Fuel Injector (optimized, improved multiple event control, higher working pressure) .....	10	10
Piston (reduced friction skirt, ring and pin) .....	3	3
Valvetrain (reduced friction, roller tappet) .....	75	75
Waste Heat Recovery .....	1,340	1,340
“Right sized” engine .....	– 127	– 127
Total .....	1,698	1,698

**Note:** “Right sized” diesel engine is a smaller, less costly engine than the engine it replaces.

(ii) Vocational Diesel Engine Package  
Costs

TABLE II-11—PROPOSED MY2021 VOCATIONAL DIESEL ENGINE COMPONENT COSTS INCLUSIVE OF INDIRECT COST MARKUPS AND ADOPTION RATES (2012\$)

	Light HD	Medium HD	Heavy HD
Aftertreatment system (improved effectiveness SCR, dosing, DPF) .....	\$8	\$8	\$8
Valve Actuation .....	91	91	91
Cylinder Head (flow optimized, increased firing pressure, improved thermal management) .....	6	3	3
Turbocharger (improved efficiency) .....	10	10	10
EGR Cooler (improved efficiency) .....	2	2	2
Water Pump (optimized, variable vane, variable speed) .....	57	57	57
Oil Pump (optimized) .....	3	3	3
Fuel Pump (higher working pressure, increased efficiency, improved pressure regulation) .....	3	3	3
Fuel Rail (higher working pressure) .....	7	6	6
Fuel Injector (optimized, improved multiple event control, higher working pressure) .....	8	6	6
Piston (reduced friction skirt, ring and pin) .....	1	1	1
Valvetrain (reduced friction, roller tappet) .....	69	52	52
Model Based Controls .....	28	28	28
Total .....	293	270	270

TABLE II-12—PROPOSED MY2024 VOCATIONAL DIESEL ENGINE COMPONENT COSTS INCLUSIVE OF INDIRECT COST MARKUPS AND ADOPTION RATES (2012\$)

	Light HD	Medium HD	Heavy HD
Aftertreatment system (improved effectiveness SCR, dosing, DPF) .....	\$13	\$13	\$13
Valve Actuation .....	157	157	157
Cylinder Head (flow optimized, increased firing pressure, improved thermal management) .....	10	6	6
Turbocharger (improved efficiency) .....	16	16	16
EGR Cooler (improved efficiency) .....	3	3	3
Water Pump (optimized, variable vane, variable speed) .....	79	79	79
Oil Pump (optimized) .....	4	4	4

TABLE II-12—PROPOSED MY2024 VOCATIONAL DIESEL ENGINE COMPONENT COSTS INCLUSIVE OF INDIRECT COST MARKUPS AND ADOPTION RATES (2012\$)—Continued

	Light HD	Medium HD	Heavy HD
Fuel Pump (higher working pressure, increased efficiency, improved pressure regulation) .....	4	4	4
Fuel Rail (higher working pressure) .....	10	9	9
Fuel Injector (optimized, improved multiple event control, higher working pressure) .....	13	10	10
Piston (reduced friction skirt, ring and pin) .....	2	2	2
Valvetrain (reduced friction, roller tappet) .....	95	71	71
Model Based Controls .....	31	31	31
Total .....	437	405	405

TABLE II-13—PROPOSED MY2027 VOCATIONAL DIESEL ENGINE COMPONENT COSTS INCLUSIVE OF INDIRECT COST MARKUPS AND ADOPTION RATES (2012\$)

	Light HD	Medium HD	Heavy HD
Aftertreatment system (improved effectiveness SCR, dosing, DPF) .....	\$14	\$14	\$14
Valve Actuation .....	169	169	169
Cylinder Head (flow optimized, increased firing pressure, improved thermal management) .....	10	6	6
Turbocharger (improved efficiency) .....	17	17	17
EGR Cooler (improved efficiency) .....	3	3	3
Water Pump (optimized, variable vane, variable speed) .....	84	84	84
Oil Pump (optimized) .....	4	4	4
Fuel Pump (higher working pressure, increased efficiency, improved pressure regulation) .....	4	4	4
Fuel Rail (higher working pressure) .....	11	9	9
Fuel Injector (optimized, improved multiple event control, higher working pressure) .....	13	10	10
Piston (reduced friction skirt, ring and pin) .....	3	3	3
Valvetrain (reduced friction, roller tappet) .....	100	75	75
Model Based Controls .....	39	39	39
Total .....	471	437	437

(e) Feasibility of Phasing In the CO<sub>2</sub> and Fuel Consumption Standards Sooner

The agencies are requesting comment on accelerated standards for diesel engines that would achieve the same reductions as the proposed standards, but with less lead time. Table II-14 and Table II-15 below show a technology path that the agencies project could be used to achieve the reductions that would be required within the lead time allowed by the alternative standards. As

discussed in Sections I and X, the agencies are proposing to fully phase in these standards through 2027. The agencies believe that standards that fully phase in through 2024 have the potential to be the maximum feasible and appropriate option. However, based on the evidence currently before the agencies, we have outstanding questions (for which we are seeking comment) regarding relative risks and benefits of that option in the timeframe envisioned. Commenters are encouraged to address

how technologies could develop if a shorter lead time is selected. In particular, we request comment on the likelihood that WHR systems would be available for tractor engines in this time frame, and that WHR systems would achieve the projected level of reduction and the necessary reliability. We also request comment on whether it would be possible to apply the model based controls described in Section II.D.(2) (a)(i) to this many vocational engines in this time frame.

TABLE II-14—PROJECTED TRACTOR ENGINE TECHNOLOGIES AND REDUCTION FOR ALTERNATIVE 4 STANDARDS

%-Improvements beyond Phase 1, 2018 engine as baseline	SET reduction (%)	Market penetration MY 2021 (%)	Market penetration MY 2024 (%)
Turbo compound .....	1.82	5	10
WHR (Rankine cycle) .....	3.58	4	15
Parasitics/Friction (Cyl Kits, pumps, FIE), lubrication .....	1.41	60	100
Aftertreatment .....	0.61	60	100
Exhaust Manifold Turbo Efficiency EGR Cooler VVT .....	1.14	60	100
Combustion/FI/Control .....	1.11	60	100
Downsizing .....	0.29	20	30
Market Penetration Weighted Package .....		2.1	4.2

TABLE II-15—PROJECTED VOCATIONAL ENGINE TECHNOLOGIES AND REDUCTION FOR MORE STRINGENT ALTERNATIVE STANDARDS

%-Improvements beyond Phase 1, 2018 engine as baseline	FTP reduction (%)	Market penetration MY 2021 (%)	Market penetration MY 2024 (%)
Model based control .....	2	30	40
Parasitics/Friction .....	1.5	70	100
EGR/Air/VVT/Turbo .....	1	70	100
Improved AT .....	0.5	70	100
Combustion Optimization .....	1	70	100
Weighted reduction (%)—L/MHD/HHD .....	.....	2.5	4.0

The projected HDD engine package costs for both tractors and vocational engines in MYs 2021 and 2024 under Alternative 4 are shown in Table II-16. Note that, while the technology application rates in MY2024 under Alternative 4 are essentially identical to those for MY2027 under the proposal,

the costs are about 5 to 11 percent higher under Alternative 4 due to learning effects and markup changes that are estimated to have occurred by MY2027 under Alternative 3. Note also that the agencies did not include any additional costs for accelerating technology development or to address

potential in-use durability issues. We request comment on whether such costs would occur if we finalized this alternative. We also request comment on what steps could be taken to mitigate such costs.

TABLE II-16—EXPECTED PACKAGE COSTS FOR HD DIESEL ENGINES UNDER ALTERNATIVE 4 (2012\$) <sup>a</sup>

Model year	MHDD tractor	HHDD tractor	LHDD vocational	MHDD vocational	HHDD vocational
2021 .....	\$656	\$656	\$372	\$345	\$345
2024 .....	1,885	1,885	493	457	457

**Note:**

<sup>a</sup>Costs presented here include application rates.

The agencies' analysis shows that, in the absence of additional costs for accelerating technology development or to address potential in-use durability issues, the costs associated with Alternative 4 would be very similar to those we project for the proposed standards. Alternative 4 would also have similar payback times and cost-effectiveness. In other words, Alternative 4 would achieve some additional reductions for model years 2021 through 2026, with roughly proportional additional costs unless there were additional costs for accelerating development or for in-use durability issues. (Note that reductions and costs for MY 2027 and later would be equivalent for Alternative 4 and the proposed standards). In order to help make this assessment, we request comment on the following issues: whether manufacturers could meet these standards with three years less lead time, what additional expenses would be incurred to meet these standards with less lead time, and how reliable would the engines be if the manufacturers had to bring them to market three years earlier.

(3) Proposed EPA Engine Standards for N<sub>2</sub>O

EPA is proposing to adopt the MY 2021 N<sub>2</sub>O engine standards that were

originally proposed for Phase 1. The proposed level for Phase 2 would be 0.05 g/hp-hr with a default deterioration factor of 0.01 g/hp-hr, which we believe is technologically feasible because a number of engines meet this level today. This level of stringency is consistent with the agency's Phase 1 approach to set "cap" standards for N<sub>2</sub>O. EPA finalized Phase 1 standards for N<sub>2</sub>O as engine-based standards at 0.10 g/hp-hr and a 0.02 g/hp-hr default deterioration factor because the agency believes that emissions of this GHG are technologically related solely to the engine, fuel, and emissions aftertreatment systems, and the agency is not aware of any influence of vehicle-based technologies on these emissions. We continue to believe this approach is appropriate, but we believe that more stringent standards are appropriate to ensure that N<sub>2</sub>O emissions do not increase in the future. Note that NHTSA did not adopt standards for N<sub>2</sub>O because these emissions do not impact fuel consumption in a significant way, and is not proposing such standards for Phase 2 for the same reason.

We are proposing this change at no additional cost and no additional benefit because manufacturers are generally meeting the proposed standard today. The purpose of this standard is to prevent increases in N<sub>2</sub>O

emissions absent this proposed increase in stringency. We request comment on whether or not we should be considering additional costs for compliance. Similarly, we request comment on whether or not we should assume N<sub>2</sub>O increases in our "No Action" regulatory Alternatives 1a and 1b described in Section X.

Although N<sub>2</sub>O is emitted in very small amounts, it can have a very significant impact on the climate. The global warming potential (GWP) of one molecule of N<sub>2</sub>O is 298 times that of one molecule CO<sub>2</sub>. Because N<sub>2</sub>O and CO<sub>2</sub> coincidentally have the same molar mass, this means that one gram of N<sub>2</sub>O would have the same impact on the climate as 298 grams of CO<sub>2</sub>. To further put this into perspective, the difference between the proposed N<sub>2</sub>O standard (and deterioration factor) and the current Phase 1 standard is 0.40 g/hp-hr of N<sub>2</sub>O emissions. This is equivalent to 11.92 g/hp-hr CO<sub>2</sub>. Over the same certification test cycle (*i.e.* EPA's HD FTP) the Phase 1 engine CO<sub>2</sub> emissions standard ranges from 460 to 576 g/hp-hr, depending on the service class of the engine. Therefore, absent today's proposed action, engine N<sub>2</sub>O increases equivalent to 2.1 to 2.6 percent of the Phase 1 CO<sub>2</sub> standard could occur.

We are proposing this lower cap because we have determined that

manufacturers generally are meeting this level today but in the future could increase N<sub>2</sub>O emissions up to the current Phase 1 cap standard. Because we do not believe any manufacturer would need to do anything more than recalibrate their SCR systems to comply, the lead time being provided would be sufficient. This section later describes why manufacturers may increase N<sub>2</sub>O emissions from SCR-equipped compression-ignition engines in the absence of a lower N<sub>2</sub>O cap standard. We request comment on this. We also note that, as described in Section XI, EPA does not believe there is a similar opportunity to lower the pickup and van N<sub>2</sub>O standard because it was set at a more stringent level in Phase 1.

#### (a) N<sub>2</sub>O Formation

N<sub>2</sub>O formation in modern diesel engines is a by-product of the SCR process. It is dependent on the SCR catalyst type, the NO<sub>2</sub> to NO<sub>x</sub> ratio, the level of NO<sub>x</sub> reduction required, and the concentration of the reactants in the system (NH<sub>3</sub> to NO<sub>x</sub> ratio).

Two current engine/aftertreatment designs are driving N<sub>2</sub>O emission higher. The first is an increase in engine out NO<sub>x</sub>, which puts a higher NO<sub>x</sub> reduction burden on the SCR NO<sub>x</sub> emission control system. The second is an increase in NO<sub>2</sub> formation from the diesel oxidation catalyst (DOC) located upstream of the passive catalyzed diesel particulate filter (CDPF). This increase in NO<sub>2</sub> serves two functions: Improving

passive CDPF regeneration and optimization of faster SCR reaction.<sup>107</sup> There are multiple mechanisms through which N<sub>2</sub>O can form in an SCR system:

1. Low temperature formation of N<sub>2</sub>O over the DOC prior to the SCR catalyst.
2. Low temperature formation of NH<sub>4</sub>NO<sub>3</sub> with subsequent decomposition as exhaust temperatures increase, leading to conversion to N<sub>2</sub>O over the SCR catalyst.
3. Formation of N<sub>2</sub>O from NO<sub>2</sub> over the SCR catalyst at NO<sub>2</sub> to NO ratios greater than 1:1. N<sub>2</sub>O formation increases significantly at 300 to 350 °C.
4. Formation of N<sub>2</sub>O from NH<sub>3</sub> via partial oxidation over the ammonia slip catalyst.
5. High-temperature N<sub>2</sub>O formation over the SCR catalyst due to NH<sub>3</sub> oxidation facilitated by high SCR catalyst surface coverage of NH<sub>3</sub>.

Thus, as discussed below, control of N<sub>2</sub>O formation requires precise optimization of SCR controls including thermal management and dosing rates, as well as catalyst composition.

#### (b) N<sub>2</sub>O Emission Reduction

Through on-engine and reactor bench experiments, this same work showed that the key to reducing N<sub>2</sub>O emissions lies in intelligent emission control system design and operation, namely:

1. Selecting the appropriate DOC and/or CDPF catalyst loadings to maintain NO<sub>2</sub> to NO ratios at or below 1:1.

<sup>107</sup> Hallstrom, K., Voss, K., and Shah, S., "The Formation of N<sub>2</sub>O on the SCR Catalyst in a Heavy Duty US 2010 Emission Control System", SAE Technical Paper 2013-01-2463.

2. Avoiding high catalyst surface coverage of NH<sub>3</sub> through urea dosing management when the system is in the ideal N<sub>2</sub>O formation window.

3. Utilizing thermal management to push the SCR inlet temperature outside of the N<sub>2</sub>O low-temperature formation window.

EPA believes that reducing the standard from 0.1 g/hp-hr to 0.05 g/hp-hr is feasible because most engines have emission rates that would meet this standard today and the others could meet it with minor calibration changes at no additional cost. Numerous studies have shown that diesel engine technologies can be fine-tuned to meet the current NO<sub>x</sub> and proposed N<sub>2</sub>O standards while still providing passive CDPF regeneration even with earlier generations of SCR systems. Currently model year 2014 systems have already moved on to newer generation systems in which the combined CDPF and SCR functions have been further optimized. The result of this is 18 of 24 engines in the EPA 2014 certification database emitting N<sub>2</sub>O at less than half of the 2014 standard, and thus below the proposed standard.<sup>108</sup> Given the discussions in the literature, there are still additional calibration steps that can be taken to further reduce N<sub>2</sub>O emissions for the higher emitters to afford an adequate compliance margin and room to account for deterioration, without having an adverse effect on criteria pollutant emissions.

<sup>108</sup> <http://www.epa.gov/otaq/crttst.htm>.

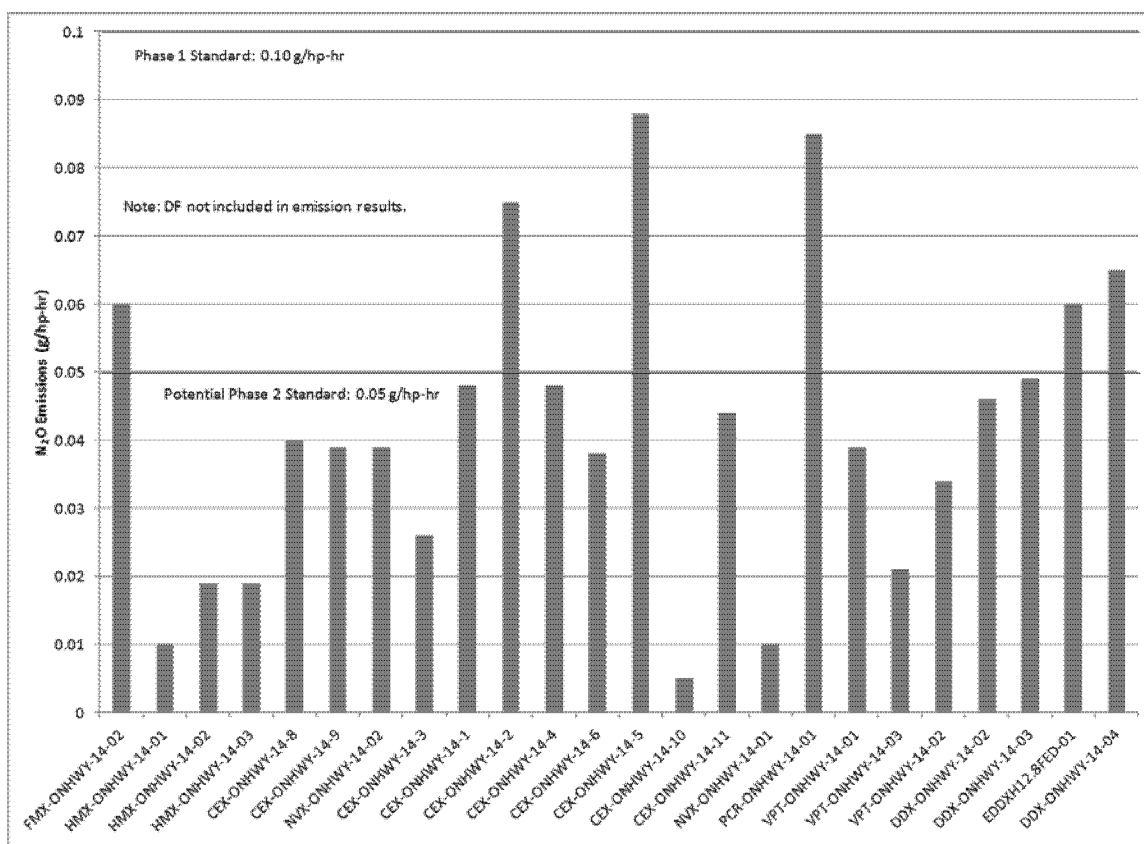


Figure II-2 EPA 2014 Certification Database N<sub>2</sub>O Emission Results for 24 Engines

It is important to note, however, that there is a trade off when trying to optimize SCR systems to achieve peak NO<sub>x</sub> reduction efficiencies. When transitioning from a <93 percent efficient MY 2011 system to a 98 percent efficient system of the future, lowering the N<sub>2</sub>O cap to 0.05 g/hp-hr would put constraints on the techniques that can be applied to improve efficiency. If system designers push the NH<sub>3</sub> to NO<sub>x</sub> ratio higher to try and achieve the maximum possible NO<sub>x</sub> reduction, it could increase N<sub>2</sub>O emissions. If EPA were to adopt a very low NO<sub>x</sub> standard (*e.g.*, 0.02 g/hp-hr) over existing test cycles, some reductions would be needed throughout the hot portion of the cycle (although most of the reductions would have to come from the cold start portion of the test cycle). Thermal management would need to play a key role, and reducing catalyst light-off time would move the SCR catalyst through the ammonium nitrate formation and decomposition thermal range quicker, thus lowering N<sub>2</sub>O emissions. An increase in the NH<sub>3</sub> to NO<sub>x</sub> ratio could also further reduce NO<sub>x</sub> emissions; however this would also adversely affect NH<sub>3</sub> slip and N<sub>2</sub>O formation. The inability of NH<sub>3</sub> slip

catalysts to handle the increased NH<sub>3</sub> load and the EPA NH<sub>3</sub> slip limit of 10 ppm would guard against this NH<sub>3</sub> to NO<sub>x</sub> ratio increase, and thus subsequent N<sub>2</sub>O increase.

In summary, EPA believes that engine manufacturers would be able to respond with highly efficient NO<sub>x</sub> reducing systems that can meet the proposed lower N<sub>2</sub>O cap of 0.05 g/hp-hr with no additional cost or lead time. When optimizing SCR systems for better NO<sub>x</sub> reduction efficiency, that optimization includes lowering the emissions of undesirable side reactions, including those that form N<sub>2</sub>O.

#### (4) EPA Engine Standards for Methane

EPA is proposing to apply the Phase 1 methane engine standards to the Phase 2 program. EPA adopted the cap standards for CH<sub>4</sub> (along with N<sub>2</sub>O standards) as engine-based standards because the agency believes that emissions of this GHG are technologically related solely to the engine, fuel, and emissions aftertreatment systems, and the agency is not aware of any influence of vehicle-based technologies on these emissions. Note that NHTSA did not adopt standards for CH<sub>4</sub> (or N<sub>2</sub>O) because

these emissions do not impact fuel consumption in a significant way, and is not proposing CH<sub>4</sub> standards for Phase 2 either.

EPA continues to believe that manufacturers of most engine technologies will be able to comply with the Phase 1 CH<sub>4</sub> standard with no technological improvements. We note that we are not aware of any new technologies that would allow us to adopt more stringent standards at this time. We request comment on this.

#### (5) Compliance Provisions and Flexibilities for Engine Standards

The agencies are proposing to continue most of the Phase 1 compliance provisions and flexibilities for the Phase 2 engine standards.

##### (a) Averaging, Banking, and Trading

The agencies' general approach to averaging is discussed in Section I. We are not proposing to offer any special credits to engine manufacturers. Except for early credits and advanced technology credits, the agencies propose to retain all Phase 1 credit flexibilities and limitations to continue for use in the Phase 2 program.

As discussed below, EPA is proposing to change the useful life for LHD

engines for GHG emissions from the current 10 years/110,000 miles to 15 years/150,000 miles to be consistent with the useful life of criteria pollutants recently updated in EPA's Tier 3 rule. In order to ensure that banked credits would maintain their value in the transition from Phase 1 to Phase 2, NHTSA and EPA propose an adjustment factor of 1.36 (*i.e.*, 150,000 mile ÷ 110,000 miles) for credits that are carried forward from Phase 1 to the MY 2021 and later Phase 2 standards. Without this adjustment factor the proposed change in useful life would effectively result in a discount of banked credits that are carried forward from Phase 1 to Phase 2, which is not the intent of the change in the useful life. See Sections V and VI for additional discussion of similar adjustments of vehicle-based credits.

(b) Request for Comment on Changing Global Warming Potential Values in the Credit Program for CH<sub>4</sub> and N<sub>2</sub>O

The Phase 1 rule included a compliance alternative allowing heavy-duty manufacturers and conversion companies to comply with the respective methane or nitrous oxide standards by means of over-complying with CO<sub>2</sub> standards (40 CFR 1036.705(d)). The heavy-duty rules allow averaging only between vehicles or engines of the same designated type (referred to as an "averaging set" in the rules). Specifically, the phase 1 heavy-duty rulemaking added a CO<sub>2</sub> credits program which allowed heavy-duty manufacturers to average and bank pollutant emissions to comply with the methane and nitrous oxide requirements after adjusting the CO<sub>2</sub> emission credits based on the relative GHG equivalents. To establish the GHG equivalents used by the CO<sub>2</sub> credits program, the Phase 1 rule incorporated the IPCC Fourth Assessment Report global warming potential (GWP) values of 25 for CH<sub>4</sub> and 298 for N<sub>2</sub>O, which are assessed over a 100 year lifetime.

Since the Phase 1 rule was finalized, a new IPCC report has been released (the Fifth Assessment Report), with new GWP estimates. This is prompting us to look again at the relative CO<sub>2</sub> equivalency of methane and nitrous oxide and to seek comment on whether the methane and nitrous oxide GWPs used to establish the GHG equivalency value for the CO<sub>2</sub> Credit program should be updated to those established by IPCC in its Fifth Assessment Report. The Fifth Assessment Report provides four 100 year GWPs for methane ranging from 28 to 36 and two 100 year GWPs for nitrous oxide, either 265 or 298. Therefore, we not only request comment on whether to

update the GWP for methane and nitrous oxide to that of the Fifth Assessment Report, but also on which value to use from this report.

(c) In-Use Compliance and Useful Life

Consistent with Section 202(a)(1) and 202 (d) of the CAA, for Phase 1, EPA established in-use standards for heavy-duty engines. Based on our assessment of testing variability and other relevant factors, we established in-use standards by adding a 3 percent adjustment factor to the full useful life emissions and fuel consumption results measured in the EPA certification process to address measurement variability inherent in comparing results among different laboratories and different engines. See 40 CFR part 1036. The agencies are not proposing to change this for Phase 2, but request comment on whether this allowance is still necessary.

We note that in Phase 1, we applied these standards to only certain engine configurations in each engine family (often called the parent rating). We welcome comment on whether the agencies should set Phase 2 CO<sub>2</sub> and fuel consumption standards for the other ratings (often called the child ratings) within an engine family. We are not proposing specific engine standards for child ratings in Phase 2 because we are proposing to include the actual engine's fuel map in the vehicle certification. We believe this approach appropriately addresses our concern that manufacturers control CO<sub>2</sub> emissions and fuel consumption from all in-use engine configurations within an engine family.

In Phase 1, EPA set the useful life for engines and vehicles with respect to GHG emissions equal to the respective useful life periods for criteria pollutants. In April 2014, as part of the Tier 3 light-duty vehicle final rule, EPA extended the regulatory useful life period for criteria pollutants to 150,000 miles or 15 years, whichever comes first, for Class 2b and 3 pickup trucks and vans and some light-duty trucks (79 FR 23414, April 28, 2014). As described in Section V, EPA is proposing that the Phase 2 GHG standards for vocational vehicles at or below 19,500 lbs GVWR apply over the same useful life of 150,000 miles or 15 years. To be consistent with that proposed change, we are also proposing that the Phase 2 GHG standards for engines used in vocational vehicles at or below 19,500 lbs GVWR apply over the same useful life of 150,000 miles or 15 years. NHTSA proposes to use the same useful life values as EPA for all vocational vehicles.

We are proposing to continue regulatory allowance in 40 CFR

1036.150(g) that allows engine manufacturers to use assigned deterioration factors (DFs) for most engines without performing their own durability emission tests or engineering analysis. However, the engines would still be required to meet the standards in actual use without regard to whether the manufacturer used the assigned DFs. This allowance is being continued as an interim provision and may be discontinued for later phases of standards as more information becomes known. Manufacturers are allowed to use an assigned additive DF of 0.0 g/bhp-hr for CO<sub>2</sub> emissions from any conventional engine (*i.e.*, an engine not including advance or off-cycle technologies). Upon request, we could allow the assigned DF for CO<sub>2</sub> emissions from engines including advance or off-cycle technologies, but only if we determine that it would be consistent with good engineering judgment. We believe that we have enough information about in-use CO<sub>2</sub> emissions from conventional engines to conclude that they will not increase as the engines age. However, we lack such information about the more advanced technologies.

We are also requesting comment on how to apply DFs to low level measurements where test-to-test variability may be larger than the actual deterioration rates being measured, such as might occur with N<sub>2</sub>O. Should we allow statistical analysis to be used to identifying trends rather than basing the DF on the highest measured value? How would we allow this where emission deterioration is not linear, such as saw-tooth deterioration related to maintenance or other offsetting emission effects causing emissions to peak before the end of the useful life? Finally, EPA requests comment on whether a similar allowance would be appropriate for criteria pollutants as well.

(d) Alternate CO<sub>2</sub> Standards

In the Phase 1 rulemaking, the agencies proposed provisions to allow certification to alternate CO<sub>2</sub> engine standards in model years 2014 through 2016. This flexibility was intended to address the special case of needed lead time to implement new standards for a previously unregulated pollutant. Since that special case does not apply for Phase 2, we are not proposing a similar flexibility in this rulemaking. We also request comment on whether this allowance should be eliminated for Phase 1 engines.

(e) Proposed Approach to Standards and Compliance Provisions for Natural Gas Engines

EPA is also proposing certain clarifying changes to its rules regarding classification of natural gas engines. This proposal relates to standards for all emissions, both greenhouse gases and criteria pollutants. These clarifying changes are intended to reflect the status quo, and therefore should not have any associated costs.

EPA emission standards have always applied differently for gasoline-fueled and diesel-fueled engines. The regulations in 40 CFR part 86 implement these distinctions by dividing engines into Otto-cycle and Diesel-cycle technologies. This approach led EPA to categorize natural gas engines according to their design history. A diesel engine converted to run on natural gas was classified as a diesel-cycle engine; a gasoline engine converted to run on natural gas was classified as an Otto-cycle engine.

The Phase 1 rule described our plan to transition to a different approach, consistent with our nonroad programs, in which we divide engines into compression-ignition and spark-ignition technologies based only on the operating characteristics of the

engines.<sup>109</sup> However, the Phase 1 rule included a provision allowing us to continue with the historic approach on an interim basis.

Under the existing EPA regulatory definitions of “compression-ignition” and “spark-ignition”, a natural gas engine would generally be considered compression-ignition if it operates with lean air-fuel mixtures and uses a pilot injection of diesel fuel to initiate combustion, and would generally be considered spark-ignition if it operates with stoichiometric air-fuel mixtures and uses a spark plug to initiate combustion.

EPA’s basic premise here is that natural gas engines performing similar in-use functions should be subject to similar regulatory requirements. The compression-ignition emission standards and testing requirements reflect the operating characteristics for the full range of heavy-duty vehicles, including substantial operation in long-haul service characteristic of tractors. The spark-ignition emission standards and testing requirements do not include some of those provisions related to use in long-haul service or other applications where diesel engines predominate, such as steady-state testing, Not-to-Exceed standards, and

extended useful life. We believe it would be inappropriate to apply the spark-ignition standards and requirements to natural gas engines that would be used in applications mostly served by diesel engines today. We are therefore proposing to replace the interim provision described above with a differentiated approach to certification of natural gas engines across all of the EPA standards—for both GHGs and criteria pollutants. Under the proposed clarifying amendment, we would require manufacturers to divide all their natural gas engines into primary intended service classes, as we already require for compression-ignition engines, whether or not the engine has features that otherwise could (in theory) result in classification as SI under the current rules. Any natural gas engine qualifying as a medium heavy-duty engine (19,500 to 33,000 lbs GVWR) or a heavy heavy-duty engine (over 33,000 lbs GVWR) would be subject to all the emission standards and other requirements that apply to compression-ignition engines.

Table II–17 describes the provisions that would apply differently for compression-ignition and spark-ignition engines:

TABLE II–17—REGULATORY PROVISIONS THAT ARE DIFFERENT FOR COMPRESSION-IGNITION AND SPARK-IGNITION ENGINES

Provision	Compression-ignition	Spark-ignition
Transient duty cycle .....	40 CFR part 86, Appendix I, paragraph (f)(2) cycle; divide by 1.12 to de-normalize.	40 CFR part 86, Appendix I, paragraph (f)(1) cycle.
Ramped-modal test (SET) .....	yes .....	no.
NTE standards .....	yes .....	no.
Smoke standard .....	yes .....	no.
Manufacturer-run in-use testing .....	yes .....	no.
ABT—pollutants .....	NO <sub>x</sub> , PM .....	NO <sub>x</sub> , NMHC.
ABT—transient conversion factor ..	6.5 .....	6.3.
ABT—averaging set .....	Separate averaging sets for light, medium, and heavy HDDE .....	One averaging set for all SI engines.
Useful life .....	110,000 miles for light HDDE .....	110,000 miles
	185,000 miles for medium HDDE.	
	435,000 miles for heavy HDDE.	
Warranty .....	50,000 miles for light HDDE .....	50,000 miles.
	100,000 miles for medium HDDE.	
	100,000 miles for heavy HDDE.	
Detailed AECD description .....	yes .....	no.
Test engine selection .....	highest injected fuel volume .....	most likely to exceed emission standards.

The onboard diagnostic requirements already differentiate requirements by fuel type, so there is no need for those provisions to change based on the considerations of this section.

We are not aware of any currently certified engines that would change

from compression-ignition to spark-ignition under the proposed clarified approach. Nonetheless, because these proposed standards implicate rules for criteria pollutants (as well as GHGs), the provisions of CAA section 202(a)(3)(C) apply (for the criteria pollutants),

notably the requirement of four years lead time. We are therefore proposing to continue to apply the existing interim provision through model year 2020.<sup>110</sup>

<sup>109</sup> See 40 CFR 1036.108.

<sup>110</sup> Section 202(a)(2), applicable to emissions of greenhouse gases, does not mandate a specific

period of lead time, but EPA sees no reason for a different compliance date here for GHGs and



Starting in model year 2021, all the provisions would apply as described above. Manufacturers would not be permitted to certify any engine families using carryover emission data if a particular engine model switched from compression-ignition to spark-ignition, or vice versa. However, as noted above, in practice these vehicles are already being certified as CI engines, so we view these changes as clarifications ratifying the current status quo.

We are also proposing that these provisions would apply equally to engines fueled by any fuel other than gasoline or ethanol, should such engines be produced in the future. Given the current and historic market for vehicles above 19,500 lbs GVWR, EPA believes any alternative-fueled vehicles in this weight range would be competing primarily with diesel vehicles and should be subject to the same requirements as them. We request comment on all aspects of classifying natural-gas and other engines for purposes of applying emission standards. See Sections XI and XII for additional discussion of natural gas fueled engines.

#### (f) Crankcase Emissions From Natural Gas Engines

EPA is proposing one fuel-specific provision for natural gas engines, likewise applicable to all pollutant emissions, both GHGs and criteria pollutant emissions. Note that we are also proposing other vehicle-level emissions controls for the natural gas storage tanks and refueling connections. These are presented in Section XIII.

EPA is proposing to require that all natural gas-fueled engines have closed crankcases, rather than continuing the provision that allows venting to the atmosphere all crankcase emissions from all compression-ignition engines. This has been allowed as long as these vented crankcase emissions are measured and accounted for as part of an engine's tailpipe emissions. This allowance has historically been in place to address the technical limitations related to recirculating diesel-fueled engines' crankcase emissions, which

criteria pollutants. This is also true with respect to the closed crankcase emission discussed in the following subsection.

have high PM emissions, back into the engine's air intake. High PM emissions vented into the intake of an engine can foul turbocharger compressors and aftercooler heat exchangers. In contrast, historically EPA has mandated closed crankcase technology on all gasoline fueled engines and all natural gas spark-ignition engines.<sup>111</sup> The inherently low PM emissions from these engines posed no technical barrier to a closed crankcase mandate. Because natural gas-fueled compression ignition engines also have inherently low PM emissions, there is no technological limitation that would prevent manufacturers from closing the crankcase and recirculating all crankcase gases into a natural gas-fueled compression ignition engine's air intake. We are requesting comment on the costs and effectiveness of technologies that we have identified to comply with these provisions. In addition, EPA is proposing that this revised standard not take effect until the 2021 model year, consistent with the requirement of section 202(a)(3)(C) to provide four years lead time.

### III. Class 7 and 8 Combination Tractors

Class 7 and 8 combination tractors-trailers contribute the largest portion of the total GHG emissions and fuel consumption of the heavy-duty sector, approximately two-thirds, due to their large payloads, their high annual miles traveled, and their major role in national freight transport.<sup>112</sup> These vehicles consist of a cab and engine (tractor or combination tractor) and a trailer.<sup>113</sup> In general, reducing GHG emissions and fuel consumption for these vehicles would involve improvements to all aspects of the vehicle.

As we found during the development in Phase 1 and as continues to be true in the industry today, the heavy-duty combination tractor-trailer industry

consists of separate tractor manufacturers and trailer manufacturers. We are not aware of any manufacturer that typically assembles both the finished truck and the trailer and introduces the combination into commerce for sale to a buyer. There are also large differences in the kinds of manufacturers involved with producing tractors and trailers. For HD highway tractors and their engines, a relatively limited number of manufacturers produce the vast majority of these products. The trailer manufacturing industry is quite different, and includes a large number of companies, many of which are relatively small in size and production volume. Setting standards for the products involved—tractors and trailers—requires recognition of the large differences between these manufacturing industries, which can then warrant consideration of different regulatory approaches. Thus, although tractor-trailers operate essentially as a unit from both a commercial standpoint and for purposes of fuel efficiency and CO<sub>2</sub> emissions, the agencies have developed separate proposed standards for each.

Based on these industry characteristics, EPA and NHTSA believe that the most appropriate regulatory approach for combination tractors and trailers is to establish standards for tractors separately from trailers. As discussed below in Section IV, the agencies are also proposing standards for certain types of trailers.


#### A. Summary of the Phase 1 Tractor Program

The design of each tractor's cab and drivetrain determines the amount of power that the engine must produce in moving the truck and its payload down the road. As illustrated in Figure III-1, the loads that require additional power from the engine include air resistance (aerodynamics), tire rolling resistance, and parasitic losses (including accessory loads and friction in the drivetrain). The importance of the engine design is that it determines the basic GHG emissions and fuel consumption performance for the variety of demands placed on the vehicle, regardless of the characteristics of the cab in which it is installed.

<sup>111</sup> See 40 CFR 86.008–10(c).

<sup>112</sup> The on-highway Class 7 and 8 combination tractor-trailers constitute the vast majority of this regulatory category. A small fraction of combination tractors are used in off-road applications and are regulated differently, as described in Section III.C.

<sup>113</sup> "Tractor" is defined in 49 CFR 571.3 to mean "a truck designed primarily for drawing other motor vehicles and not so constructed as to carry a load other than a part of the weight of the vehicle and the load so drawn."

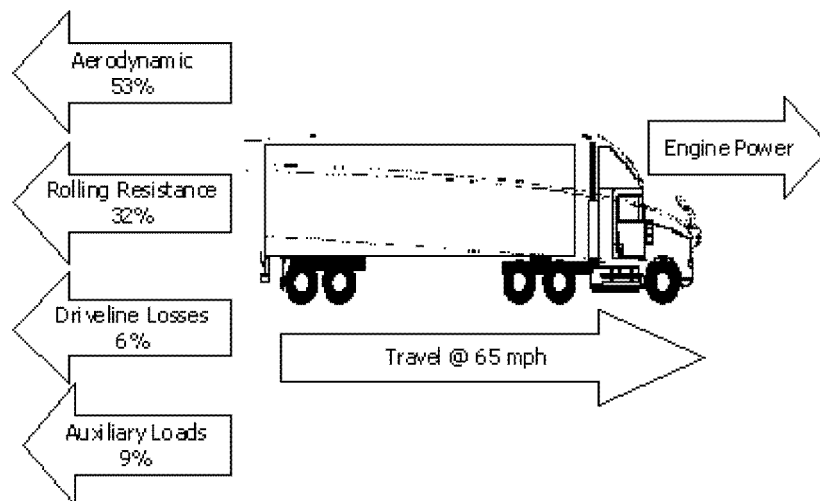

**Figure III-1 Combination Tractor and Trailer Loads<sup>114</sup>**

Accordingly, for Class 7 and 8 combination tractors, the agencies adopted two sets of Phase 1 tractor standards for fuel consumption and CO<sub>2</sub> emissions. The CO<sub>2</sub> emission and fuel consumption reductions related to engine technologies are recognized in the engine standards. For vehicle-related emissions and fuel consumption, tractor manufacturers are required to meet vehicle-based standards. Compliance with the vehicle standard must be determined using the GEM vehicle simulation tool.

The Phase 1 tractor standards were based on several key attributes related to GHG emissions and fuel consumption that reasonably represent the many differences in utility and performance among these vehicles. Attribute-based standards in general recognize the variety of functions performed by vehicles and engines, which in turn can affect the kind of technology that is available to control emissions and reduce fuel consumption, or its effectiveness. Attributes that characterize differences in the design of vehicles, as well as differences in how the vehicles will be employed in-use, can be key factors in evaluating technological improvements for reducing CO<sub>2</sub> emissions and fuel consumption. Developing an appropriate attribute-based standard can also avoid interfering with the ability of the market to offer a variety of products to meet the customer's demand. The Phase 1 tractor standards differ depending on GVWR (*i.e.*, whether the truck is Class 7 or Class 8), the height

of the roof of the cab, and whether it is a "day cab" or a "sleeper cab." These latter two attributes are important because the height of the roof, designed to correspond to the height of the trailer, significantly affects air resistance, and a sleeper cab generally corresponds to the opportunity for extended duration idle emission and fuel consumption improvements. Based on these attributes, the agencies created nine subcategories within the Class 7 and 8 combination tractor category. The Phase 1 rules set standards for each of them. Phase 1 standards began with the 2014 model year and were followed with more stringent standards following in model year 2017.<sup>115</sup> The standards represent an overall fuel consumption and CO<sub>2</sub> emissions reduction up to 23 percent from the tractors and the engines installed in them when compared to a baseline 2010 model year tractor and engine without idle shutdown technology. Although the EPA and NHTSA standards are expressed differently (grams of CO<sub>2</sub> per ton-mile and gallons per 1,000 ton-mile respectively), the standards are equivalent.

In Phase 1, the agencies allowed manufacturers to certify certain types of combination tractors as vocational vehicles. These are tractors that do not typically operate at highway speeds, or would otherwise not benefit from efficiency improvements designed for line-haul tractors (although standards would still apply to the engines installed in these vehicles). The

agencies created a subcategory of "vocational tractors," or referred to as "special purpose tractors" in 40 CFR part 1037, because real world operation of these tractors is better represented by our Phase 1 vocational vehicle duty cycle than the tractor duty cycles. Vocational tractors are subject to the standards for vocational vehicles rather than the combination tractor standards. In addition, specific vocational tractors and heavy-duty vocational vehicles primarily designed to perform work off-road or having tires installed with a maximum speed rating at or below 55 mph are exempted from the Phase 1 standards.

In Phase 1, the agencies also established separate performance standards for the engines manufactured for use in these tractors. EPA's engine-based CO<sub>2</sub> standards and NHTSA's engine-based fuel consumption standards are being implemented using EPA's existing test procedures and regulatory structure for criteria pollutant emissions from medium- and heavy-duty engines. These engine standards vary depending on engine size linked to intended vehicle service class (which are the same service classes used for many years for EPA's criteria pollutant standards).

Manufacturers demonstrate compliance with the Phase 1 tractor standards using the GEM simulation tool. As explained in Section II above, GEM is a customized vehicle simulation model which is the preferred approach to demonstrating compliance testing for combination tractors rather than chassis dynamometer testing used in light-duty vehicle compliance. As discussed in the development of HD Phase 1 and recommended by the NAS 2010 study,

<sup>114</sup> Adapted from Figure 4.1. Class 8 Truck Energy Audit, Technology Roadmap for the 21st Century Truck Program: A Government-Industry Research Partnership, 21CT-001, December 2000.

<sup>115</sup> Manufacturers may voluntarily opt-in to the NHTSA fuel consumption standards in model years 2014 or 2015. Once a manufacturer opts into the NHTSA program it must stay in the program for all optional MYs.

a simulation tool is the preferred approach for HD tractor compliance because of the extremely large number of vehicle configurations.<sup>116</sup> The GEM compliance tool was developed by EPA and is an accurate and cost-effective alternative to measuring emissions and fuel consumption while operating the vehicle on a chassis dynamometer. Instead of using a chassis dynamometer as an indirect way to evaluate real world operation and performance, various characteristics of the vehicle are measured and these measurements are used as inputs to the model. For HD Phase 1, these characteristics relate to key technologies appropriate for this category of truck including aerodynamic features, weight reductions, tire rolling resistance, the presence of idle-reducing technology, and vehicle speed limiters. The model also assumes the use of a representative typical engine in compliance with the separate, applicable Phase 1 engine standard. Using these inputs, the model is used to quantify the overall performance of the vehicle in terms of CO<sub>2</sub> emissions and fuel consumption. CO<sub>2</sub> emission reduction and fuel consumption technologies not measured by the model must be evaluated separately, and the HD Phase 1 rules establish mechanisms allowing credit for such “off-cycle” technologies.

In addition to the final Phase 1 tractor-based standards for CO<sub>2</sub>, EPA adopted a separate standard to reduce leakage of HFC refrigerant from cabin air conditioning (A/C) systems from combination tractors, to apply to the tractor manufacturer. This HFC leakage standard is independent of the CO<sub>2</sub> tractor standard. Manufacturers can choose technologies from a menu of leak-reducing technologies sufficient to comply with the standard, as opposed to using a test to measure performance.

The Phase 1 program also provided several flexibilities to advance the goals of the overall program while providing alternative pathways to achieve compliance. The primary flexibility is the averaging, banking, and trading program which allows emissions and fuel consumption credits to be averaged within an averaging set, banked for up to five years, or traded among manufacturers. Manufacturers with credit deficits were allowed to carry-forward credit deficits for up to three

model years, similar to the LD GHG and CAFE carry-back credits. Phase 1 also included several interim provisions, such as incentives for advanced technologies and provisions to obtain credits for innovative technologies (called off-cycle in the Phase 2 program) not accounted for by the HD Phase 1 version of GEM or for certifying early.

#### *B. Overview of the Proposed Phase 2 Tractor Program*

The proposed HD Phase 2 program is similar in many respects to the Phase 1 approach. The agencies are proposing to maintain the Phase 1 attribute-based regulatory structure in terms of dividing the tractor category into the same nine subcategories based on the tractor's GVWR, cab configuration, and roof height. This structure is working well in the implementation of Phase 1. The one area where the agencies are proposing to change the regulatory structure is related to heavy-haul tractors. As noted above, the Phase 1 regulations include a set of provisions that allow vocational tractors to be treated as vocational vehicles. However, because the agencies propose to include the powertrain as part of the technology basis for the tractor and vocational vehicle standards in Phase 2, we are proposing to classify a certain set of these vocational tractors as heavy-haul tractors and subject them to a separate tractor standard that reflects their unique powertrain requirements and limitations in application of technologies to reduce fuel consumption and CO<sub>2</sub> emissions.<sup>117</sup>

The agencies propose to also retain much of the certification and compliance structure developed in Phase 1 but to simplify end of the year reporting. The agencies propose that the Phase 2 tractor CO<sub>2</sub> emissions and fuel consumption standards, as in Phase 1, be aligned.<sup>118</sup> The agencies also propose to continue to have separate engine and vehicle standards to drive technology improvements in both areas. The reasoning behind the proposal to maintain separate standards is discussed above in Section II.B.2. As in Phase 1, the agencies propose to certify tractors using the GEM simulation tool and to require manufacturers to evaluate the performance of subsystems through testing (the results of this testing to be used as inputs to the GEM simulation tool). Other aspects of the proposed HD Phase 2 certification and compliance program also mirror the Phase 1

program, such as maintaining a single reporting structure to satisfy both agencies, requiring limited data at the beginning of the model year for certification, and determining compliance based on end of year reports. In the Phase 1 program, manufacturers participating in the ABT program provided 90 day and 270 day reports after the end of the model year. The agencies required two reports for the initial program to help manufacturers become familiar with the reporting process. For the Phase 2 program, the agencies propose that manufacturers would only be required to submit one end of the year report, which would simplify reporting.

Even though many aspects of the proposed HD Phase 2 program are similar to Phase 1, there are some key differences. While Phase 1 focused on reducing CO<sub>2</sub> emissions and fuel consumption in tractors through the application of existing (“off-the-shelf”) technologies, the proposed HD Phase 2 standards seek additional reductions through increased use of existing technologies and the development and deployment of more advanced technologies. To evaluate the effectiveness of a more comprehensive set of technologies, the agencies propose several additional inputs to GEM. The proposed set of inputs includes the Phase 1 inputs plus parameters to assess the performance of the engine, transmission, and driveline. Specific inputs for, among others, predictive cruise control, automatic tire inflation systems, and 6x2 axles would now be required. Manufacturers would conduct component testing to obtain the values for these technologies (should they choose to use them), which testing values would then be input into the GEM simulation tool. See Section III.D.2 below. To effectively assess performance of the technologies, the agencies also propose to change some aspects of the drive cycle used in certification through the addition of road grade. To reflect the existing trailer market, the agencies are proposing to refine the aerodynamic test procedure for high roof cabs by adding some aerodynamic improving devices to the reference trailer (used for determining the relative aerodynamic performance of the tractor). The agencies also propose to change the aerodynamic certification test procedure to capture aerodynamic improvement of trailers and the impact of wind on tractor aerodynamic performance. The agencies are also proposing to change some of the interim provisions developed in Phase 1 to reflect the maturity of the program and

<sup>116</sup> National Academy of Science. “Technologies and Approaches to Reducing the Fuel Consumption of Medium- and Heavy-Duty Vehicles.” 2010. Recommendation 8–4 stated “Simulation modeling should be used with component test data and additional tested inputs from powertrain tests, which could lower the cost and administrative burden yet achieve the needed accuracy of results.”

<sup>117</sup> See 76 FR 57138 for Phase 1 discussion. See 40 CFR 1037.801 for proposed Phase 2 heavy-haul tractor regulatory definition.

<sup>118</sup> Fuel consumption is calculated from CO<sub>2</sub> using the conversion factor of 10,180 grams of CO<sub>2</sub> per gallon for diesel fuel.

reduced need and justification for some of the Phase 1 flexibilities. Further discussions on all of these matters are covered in the following sections.

#### C. Proposed Phase 2 Tractor Standards

EPA is proposing CO<sub>2</sub> standards and NHTSA is proposing fuel consumption standards for new Class 7 and 8 combination tractors. In addition, EPA is proposing to maintain the HFC standards for the air conditioning systems that were adopted in Phase 1. EPA is also seeking comment on new standards to further control emissions of particulate matter (PM) from auxiliary power units (APU) installed in tractors that would prevent an unintended consequence of increasing PM emissions from tractors during long duration idling.

This section describes in detail the proposed standards. In addition to describing the proposed alternative ("Alternative 3"), in Section III.D.2.f we also detail another alternative ("Alternative 4"). Alternative 4 provides less lead time than the proposed set of

standards but may provide more net benefits in the form of greater emission and fuel consumption reductions (with somewhat higher costs) in the early years of the program. The agencies believe Alternative 4 has the potential to be maximum feasible and appropriate as discussed later in this section.

The agencies welcome comment on all aspects of the proposed standards and the alternative standards described in Section III.D.2.f. Commenters are encouraged to address all aspects of feasibility analysis, including costs, the likelihood of developing the technology to achieve sufficient reliability within the proposed and alternative lead-times, and the extent to which the market could utilize the technology. It would be helpful if comments addressed these issues separately for each type of technology.

#### (1) Proposed Fuel Consumption and CO<sub>2</sub> Standards

The proposed fuel consumption and CO<sub>2</sub> standards for the tractor cab are shown below in Table III–1. These

proposed standards would achieve reductions of up to 24 percent compared to the 2017 model year baseline level when fully phased in beginning in the 2027 MY.<sup>119</sup> The proposed standards for Class 7 are described as "Day Cabs" because we are not aware of any Class 7 sleeper cabs in the market today; however, the agencies propose to require any Class 7 tractor, regardless of cab configuration, meet the standards described as "Class 7 Day Cab." We welcome comment on this proposed approach.

The agencies' analyses, as discussed briefly below and in more detail later in this preamble and in the draft RIA Chapter 2, indicate that these proposed standards, if finalized, would be maximum feasible (within the meaning of 49 U.S.C. Section 32902 (k)) and would be appropriate under each agency's respective statutory authorities. The agencies solicit comment on all aspects of these analyses.

TABLE III–1—PROPOSED PHASE 2 HEAVY-DUTY COMBINATION TRACTOR EPA EMISSIONS STANDARDS (g CO<sub>2</sub>/ton-mile) AND NHTSA FUEL CONSUMPTION STANDARDS (gal/1,000 ton-mile)

	Day cab		Sleeper cab
	Class 7	Class 8	Class 8
<b>2021 Model Year CO<sub>2</sub> Grams per Ton-Mile</b>			
Low Roof .....	97	78	70
Mid Roof .....	107	84	78
High Roof .....	109	86	77
<b>2021 Model Year Gallons of Fuel per 1,000 Ton-Mile</b>			
Low Roof .....	9.5285	7.6621	6.8762
Mid Roof .....	10.5108	8.2515	7.6621
High Roof .....	10.7073	8.4479	7.5639
<b>2024 Model Year CO<sub>2</sub> Grams per Ton-Mile</b>			
Low Roof .....	90	72	64
Mid Roof .....	100	78	71
High Roof .....	101	79	70
<b>2024 Model Year and Later Gallons of Fuel per 1,000 Ton-Mile</b>			
Low Roof .....	8.8409	7.0727	6.2868
Mid Roof .....	9.8232	7.6621	6.9745
High Roof .....	9.9214	7.7603	6.8762
<b>2027 Model Year CO<sub>2</sub> Grams per Ton-Mile</b>			
Low Roof .....	87	70	62
Mid Roof .....	96	76	69
High Roof .....	96	76	67
<b>2027 Model Year and Later Gallons of Fuel per 1,000 Ton-Mile</b>			
Low Roof .....	8.5462	6.8762	6.0904
Mid Roof .....	9.4303	7.4656	6.7780

<sup>119</sup> Since the HD Phase 1 tractor standards fully phase-in by the MY 2017, this is the logical baseline year.

TABLE III-1—PROPOSED PHASE 2 HEAVY-DUTY COMBINATION TRACTOR EPA EMISSIONS STANDARDS (g CO<sub>2</sub>/ton-mile) AND NHTSA FUEL CONSUMPTION STANDARDS (gal/1,000 ton-mile)—Continued

	Day cab		Sleeper cab
	Class 7	Class 8	Class 8
High Roof .....	9.4303	7.4656	6.5815

It should be noted that the proposed HD Phase 2 CO<sub>2</sub> and fuel consumptions standards are not directly comparable to the Phase 1 standards. This is because the agencies are proposing several test procedure changes to more accurately reflect real world operation of tractors. These changes will result in the following differences. First, the same vehicle evaluated using the proposed HD Phase 2 version of GEM will obtain higher (*i.e.* less favorable) CO<sub>2</sub> and fuel consumption values because the Phase 2 drive cycles include road grade. Road grade, which (of course) exists in the real-world, requires the engine to operate at higher horsepower levels to maintain speed while climbing a hill. Even though the engine saves fuel on a downhill section, the overall impact increases CO<sub>2</sub> emissions and fuel consumption. The second of the key differences between the CO<sub>2</sub> and fuel consumption values in Phase 1 and Phase 2 is due to proposed changes in the evaluation of aerodynamics. In the real world, vehicles are exposed to wind which increases the drag of the vehicle and in turn increases the power required to move the vehicle down the road. To more appropriately reflect the in-use aerodynamic performance of tractor-trailers, the agencies are proposing to input into Phase 2 GEM the wind averaged coefficient of drag instead of the no-wind (zero yaw) value used in Phase 1. The final key difference between Phase 1 and the proposed Phase 2 program includes a more realistic and improved simulation of the transmission in GEM, which could increase CO<sub>2</sub> and fuel consumption relative to Phase 1.

The agencies are proposing Phase 2 CO<sub>2</sub> emissions and fuel consumption standards for the combination tractors that reflect reductions that can be achieved through improvements in the tractor's powertrain, aerodynamics, tires, and other vehicle systems. The agencies have analyzed the feasibility of achieving the proposed CO<sub>2</sub> and fuel consumption standards, and have identified means of achieving the proposed standards that are technically feasible in the lead time afforded, economically practicable and cost-effective. EPA and NHTSA present the estimated costs and benefits of the

proposed standards in Section III.D.2. In developing the proposed standards for Class 7 and 8 tractors, the agencies have evaluated the following:

- the current levels of emissions and fuel consumption
- the kinds of technologies that could be utilized by tractor and engine manufacturers to reduce emissions and fuel consumption from tractors and associated engines
- the necessary lead time
- the associated costs for the industry
- fuel savings for the consumer
- the magnitude of the CO<sub>2</sub> and fuel savings that may be achieved

The technologies on whose performance the proposed tractor standards are predicated include: Improvements in the engine, transmission, driveline, aerodynamic design, tire rolling resistance, other accessories of the tractor, and extended idle reduction technologies. These technologies, and other accessories of the tractor, are described in draft RIA Chapter 2.4. The agencies' evaluation shows that some of these technologies are available today, but have very low adoption rates on current vehicles, while others will require some lead time for development. EPA and NHTSA also present the estimated costs and benefits of the proposed Class 7 and 8 combination tractor standards in draft RIA Chapter 2.8 and 2.12, explaining as well the basis for the agencies' proposed stringency level.

As explained below in Section III.D, EPA and NHTSA have determined that there would be sufficient lead time to introduce various tractor and engine technologies into the fleet starting in the 2021 model year and fully phasing in by the 2027 model year. This is consistent with NHTSA's statutory requirement to provide four full model years of regulatory lead time for standards. As was adopted in Phase 1, the agencies are proposing for Phase 2 that manufacturers may generate and use credits from Class 7 and 8 combination tractors to show compliance with the standards. This is discussed further in Section III.F.

Based on our analysis, the 2027 model year standards for combination tractors and engines represent up to a 24 percent reduction in CO<sub>2</sub> emissions and fuel

consumption over a 2017 model year baseline tractor, as detailed in Section III.D.2. In considering the feasibility of vehicles to comply with the proposed standards over their useful lives, EPA also considered the potential for CO<sub>2</sub> emissions to increase during the regulatory useful life of the product. As we discuss in Phase 1 and separately in the context of deterioration factor (DF) testing, we have concluded that CO<sub>2</sub> emissions are likely to stay the same or actually decrease in-use compared to new certified configurations. In general, engine and vehicle friction decreases as products wear, leading to reduced parasitic losses and consequent lower CO<sub>2</sub> emissions. Similarly, tire rolling resistance falls as tires wear due to the reduction in tread height. In the case of aerodynamic components, we project no change in performance through the regulatory life of the vehicle since there is essentially no change in their physical form as vehicles age. Similarly, weight reduction elements such as aluminum wheels are (evidently) not projected to increase in mass through time, and hence, we can conclude will not deteriorate with regard to CO<sub>2</sub> performance in-use. Given all of these considerations, the agencies are confident in projecting that the tractor standards being proposed today would be technically feasible throughout the regulatory useful life of the program.

#### (2) Proposed Non-CO<sub>2</sub> GHG Standards for Tractors

EPA is also proposing standards to control non-CO<sub>2</sub> GHG emissions from Class 7 and 8 combination tractors.

##### (a) N<sub>2</sub>O and CH<sub>4</sub> Emissions

The proposed heavy-duty engine standards for both N<sub>2</sub>O and CH<sub>4</sub> as well as details of the proposed standards are included in the discussion in Section II.D.3 and II.D.4. No additional controls for N<sub>2</sub>O or CH<sub>4</sub> emissions beyond those in the proposed HD Phase 2 engine standards are being considered for the tractor category.

##### (b) HFC Emissions

Manufacturers can reduce hydrofluorocarbon (HFC) emissions from air conditioning (A/C) leakage emissions in two ways. First, they can

utilize leak-tight A/C system components. Second, manufacturers can largely eliminate the global warming impact of leakage emissions by adopting systems that use an alternative, low-Global Warming Potential (GWP) refrigerant, to replace the commonly used R-134a refrigerant. EPA proposes to address HFC emissions by maintaining the A/C leakage standards adopted in HD Phase 1 (see 40 CFR 1037.115). EPA believes the Phase 1 use of leak-tight components is at an appropriate level of stringency while maintaining the flexibility to produce the wide variety of A/C system configurations required in the tractor category. In addition, there currently are not any low GWP refrigerants approved for the heavy-duty vehicle sector. Without an alternative refrigerant approved for this sector, it is challenging to demonstrate feasibility to

reduce the amount of leakage allowed under the HFC leakage standard. Please see Section I.F(1)(b) for a discussion related to alternative refrigerants.

### (3) PM Emissions From APUs

Auxiliary power units (APUs) can be used in lieu of operating the main engine during extended idle operations to provide climate control and power to the driver. APUs can reduce fuel consumption, NO<sub>x</sub>, HC, CH<sub>4</sub>, and CO<sub>2</sub> emissions when compared to main engine idling.<sup>120</sup> However, a potential unintended consequence of reducing CO<sub>2</sub> emissions from combination tractors through the use of APUs during extended idle operation is an increase in PM emissions. Therefore, EPA is seeking comment on the need and appropriateness to further reduce PM emissions from APUs.

EPA conducted an analysis evaluating the potential impact on PM emissions

due to an increase in APU adoption rates using MOVES. In this analysis, EPA assumed that these APUs emit criteria pollutants at the level of the EPA standard for this type of non-road diesel engines. Under this assumption, an APU would emit 1.8 grams PM per hour, assuming an extended idle load demand of 4.5 kW (6 hp).<sup>121</sup> However, a 2010 model year or newer tractor that uses its main engine to idle emits approximately 0.35 grams PM per hour.<sup>122</sup> The results from these MOVES runs are shown below in Table III–2. These results show that an increase in use of APUs could lead to an overall increase in PM emissions if left uncontrolled. Column three labeled “Proposed Program PM<sub>2.5</sub> Emission Impact without Further PM Control (tons)” shows the incremental increase in PM<sub>2.5</sub> without further regulation of APU PM<sub>2.5</sub> emissions.

TABLE III–2—PROJECTED IMPACT OF INCREASED ADOPTION OF APUS IN PHASE 2

CY	Baseline HD vehicle PM <sub>2.5</sub> emissions (tons)	Proposed program PM <sub>2.5</sub> <sup>a</sup> emission impact without further PM control (tons)
2035 .....	21,452	1,631
2050 .....	24,675	2,257

#### Note:

<sup>a</sup> Positive numbers mean emissions would increase from baseline to control case. PM<sub>2.5</sub> from tire wear and brake wear are included.

Since January 1, 2008, California ARB has prohibited the idling of sleeper cab tractors during periods of sleep and rest.<sup>123</sup> The regulations apply additional requirements to diesel-fueled APUs on tractors equipped with 2007 model year or newer engines. Truck owners in California must either: (1) Fit the APU with an ARB verified Level 3 particulate control device that achieves 85 percent reduction in particulate matter; or (2) have the APU exhaust plumbed into the vehicle's exhaust system upstream of the particulate matter aftertreatment device.<sup>124</sup> Currently ARB includes four

control devices that have been verified to meet the Level 3 p.m. requirements. These devices include HUSS Umwelttechnik GmbH's FS-MK Series Diesel Particulate filters, Impco Ecotrans Technologies' ClearSky Diesel Particulate Filter, Thermo King's Electric Regenerative Diesel Particulate Filter, and Proventia's Electronically Heated Diesel Particulate Filter. In addition, ARB has approved a Cummins integrated diesel-fueled APU and several fuel-fired heaters produced by Espar and Webasto.

EPA conducted an evaluation of the impact of potentially requiring further

PM control from APUs nationwide. As shown in Table III–2, EPA projects that the HD Phase 2 program as proposed (without additional PM controls) would increase PM<sub>2.5</sub> emissions by 1,631 tons in 2035 and 2,257 tons in 2050. The annual impact of a program to further control PM could lead to a reduction of PM<sub>2.5</sub> emissions nationwide by 3,084 tons in 2035 and by 4,344 tons in 2050, as shown in Table III–3 the column labeled “Net Impact on National PM<sub>2.5</sub> Emission with Further PM Control of APUs (tons).”

<sup>120</sup> U.S. EPA. Development of Emission Rates for Heavy-Duty Vehicles in the Motor Vehicle Emissions Simulator MOVES 2010. EPA-420-B-12-049. August 2012.

<sup>121</sup> Tier 4, less-than-8 kW nonroad compression-ignition engine exhaust emissions standards

assumed for APUs: <http://www.epa.gov/otaq/standards/nonroad/nonroadci.htm>.

<sup>122</sup> U.S. EPA. MOVES2014 Reports. Last accessed on May 1, 2015 at <http://www.epa.gov/otaq/models/moves/moves-reports.htm>.

<sup>123</sup> California Air Resources Board. Idle Reduction Technologies for Sleeper Berth Trucks. Last viewed on September 19, 2014 at <http://www.arb.ca.gov/msprog/cabcomfort/cabcomfort.htm>.

<sup>124</sup> California Air Resources Board. § 2485(c)(3)(A)(1).

TABLE III-3—PROJECTED IMPACT OF FURTHER CONTROL ON PM<sub>2.5</sub> EMISSIONS<sup>A</sup>

CY	Baseline national heavy-duty vehicle PM <sub>2.5</sub> emissions (tons)	Proposed HD phase 2 program national PM <sub>2.5</sub> Emissions without Further PM Control (tons)	Proposed HD Phase 2 Program National PM <sub>2.5</sub> emissions with further pm control (tons)	Net impact on national PM <sub>2.5</sub> emission with further PM control of APUs (tons)
2035 .....	21,452	23,083	19,999	– 3,084
2050 .....	24,675	26,932	22,588	– 4,344

**Note:**<sup>a</sup> PM<sub>2.5</sub> from tire wear and brake wear are included.

EPA developed long-term cost projections for catalyzed diesel particulate filters (DPF) as part of the Nonroad Diesel Tier 4 rulemaking. In that rulemaking, EPA estimated the DPF costs would add \$580 to the cost of 150 horsepower engines (69 FR 39126, June 29, 2004). On the other hand, ARB estimated the cost of retrofitting a diesel powered APU with a PM trap to be \$2,000 in 2005.<sup>125</sup> The costs of a DPF for an APU that provides less than 25 horsepower would be less than the projected cost of a 150 HP engine because the filter volume is in general proportional to the engine-out emissions and exhaust flow rate. Proventia is charging customers \$2,240 for electronically heated DPF.<sup>126</sup> EPA welcomes comments on cost estimates associated with DPF systems for APUs.

EPA requests comments on the technical feasibility of diesel particulate filters ability to reduce PM emissions by 85 percent from non-road engines used to power APUs. EPA also requests comments on whether the technology costs outlined above are accurate, and if so, if projected reductions are appropriate taking into account cost, noise, safety, and energy factors. See CAA section 213(a)(4).

#### (4) Proposed Exclusions From the Phase 2 Tractor Standards

As noted above, in Phase 1, the agencies adopted provisions to allow tractor manufacturers to reclassify certain tractors as vocational vehicles.<sup>127</sup> The agencies propose in Phase 2 to continue to allow manufacturers to exclude certain vocational-types of tractors from the combination tractor standards and instead be subject to the vocational

vehicle standards. However, the agencies propose to set unique standards for tractors used in heavy haul applications in Phase 2. Details regarding the proposed heavy-haul standards are included below in Section II.D.3.

During the development of Phase 1, the agencies received multiple comments from several stakeholders supporting an approach for an alternative treatment of a subset of tractors because they were designed to operate at lower speeds, in stop and go traffic, and sometimes operate at higher weights than the typical line-haul tractor. These types of applications have limited potential for improvements in aerodynamic performance to reduce CO<sub>2</sub> emissions and fuel consumption. Consistent with the agencies' approach in Phase 1, the agencies agree that these vocational tractors are operated differently than line-haul tractors and therefore fit more appropriately into the vocational vehicle category. However, we need to continue to ensure that only tractors that are *truly* vocational tractors are classified as such.<sup>128</sup> A vehicle determined by the manufacturer to be a HHD vocational tractor would fall into one of the HHD vocational vehicle subcategories and be regulated as a vocational vehicle. Similarly, MHD tractors which the manufacturer chooses to reclassify as vocational tractors would be regulated as a MHD vocational vehicle. Specifically, the agencies are proposing to change the provisions in EPA's 40 CFR 1037.630 and NHTSA's regulation at 49 CFR 523.2 and only allow the following two types of vocational tractors to be eligible for reclassification by the manufacturer:

(1) Low-roof tractors intended for intra-city pickup and delivery, such as those that deliver bottled beverages to retail stores.

(2) Tractors intended for off-road operation (including mixed service operation), such as those with

reinforced frames and increased ground clearance.<sup>129</sup>

Because the difference between some vocational tractors and line-haul tractors is potentially somewhat subjective, we are also proposing to continue to limit the use of this provision to a rolling three year sales limit of 21,000 vocational tractors per manufacturer consistent with past production volumes of such vehicles. We propose to carry-over the existing three year sales limit with the recognition that heavy-haul tractors would no longer be permitted to be treated as vocational vehicles (suggesting a lower volumetric cap could be appropriate) but that the heavy-duty market has improved since the development of the HD Phase 1 rule (suggesting the need for a higher sales cap). The agencies welcome comment on whether the proposed sales volume limit is set at an appropriate level looking into the future.

Also in Phase 1, EPA determined that manufacturers that met the small business criteria specified in 13 CFR 121.201 for "Heavy Duty Truck Manufacturing" were not subject to the greenhouse gas emissions standards of 40 CFR 1037.106.<sup>130</sup> The regulations required that qualifying manufacturers must notify the Designated Compliance Officer each model year before introducing the vehicles into commerce. The manufacturers are also required to label the vehicles to identify them as excluded vehicles. EPA and NHTSA are seeking comments on eliminating this provision for tractor manufacturers in the Phase 2 program. The agencies are aware of two second stage manufacturers building custom sleeper cab tractors. We could treat these vehicles in one of two ways. First, the vehicles may be considered as dromedary vehicles and therefore treated as vocational vehicles.<sup>131</sup> Or the

<sup>125</sup> California Air Resources Board. Staff Report: Initial Statement of Reasons; Notice of Public Hearing to Consider Requirements to Reduce Idling Emissions From New and In-Use Trucks, Beginning in 2008. September 1, 2005. Page 38. Last viewed on October 20, 2014 at <http://www.arb.ca.gov/regact/hdidle/isor.pdf>.

<sup>126</sup> Proventia. Tripac Filter Kits. Last accessed on October 21, 2014 at <http://www.proventiafilters.com/purchase.html>.

<sup>127</sup> See 40 CFR 1037.630.

<sup>128</sup> As a part of the end of the year compliance process, EPA and NHTSA verify manufacturer's production reports to avoid any abuse of the vocational tractor allowance.

<sup>129</sup> See existing 40 CFR 1037.630(a)(1)(i) through (iii).

<sup>130</sup> See 40 CFR 1037.150(c).

<sup>131</sup> A dromedary is a box, deck, or plate mounted behind the tractor cab and forward of the fifth wheel on the frame of the power unit of a tractor-trailer combination to carry freight.

agencies could provide provisions that stated if a manufacturer changed the cab, but not the frontal area of the vehicle, then it could retain the aerodynamic bin of the original tractor. We welcome comments on these considerations.

EPA is proposing to not exempt glider kits from the Phase 2 GHG emission standards.<sup>132</sup> Gliders and glider kits are exempt from NHTSA's Phase 1 fuel consumption standards. For EPA purposes, the CO<sub>2</sub> provisions of Phase 1 exempted gliders and glider kits produced by small businesses but did not include such a blanket exemption for other glider kits.<sup>133</sup> Thus, some gliders and glider kits are already subject to the requirement to obtain a vehicle certificate prior to introduction into commerce as a new vehicle. However, the agencies believe glider manufacturers may not understand how these regulations apply to them, resulting in a number of uncertified vehicles.

EPA is concerned about adverse economic impacts on small businesses that assemble glider kits and glider vehicles. Therefore, EPA is proposing an option that would grandfather existing small businesses, but cap annual production based on their recent sales. EPA requests comment on whether any special provisions would be needed to accommodate glider kits. See Section XIV for additional discussion of the proposed requirements for glider vehicles.

Similarly, NHTSA is considering including glider vehicles under its Phase 2 program. The agencies request comment on their respective considerations.

We believe that the agencies potentially having different policies for glider kits and glider vehicles under the Phase 2 program would not result in problematic disharmony between the NHTSA and EPA programs, because of the small number of vehicles that would be involved. EPA believes that its proposed changes would result in the glider market returning to the pre-2007 levels, in which fewer than 1,000 glider vehicles would be produced in most years. Only non-exempt glider vehicles

would be subject to different requirements under the NHTSA and EPA regulations. However, we believe that this is unlikely to exceed a few hundred vehicles in any year, which would be few enough not to result in any meaningful disharmony between the two agencies.

With regard to NHTSA's safety authority over gliders, the agency notes that it has become increasingly aware of potential noncompliance with its regulations applicable to gliders. NHTSA has learned of manufacturers who are creating glider vehicles that are new vehicles under 49 CFR 571.7(e); however, the manufacturers are not certifying them and obtaining a new VIN as required. NHTSA plans to pursue enforcement actions as applicable against noncompliant manufacturers. In addition to enforcement actions, NHTSA may consider amending 49 CFR 571.7(e) and related regulations as necessary. NHTSA believes manufacturers may not be using this regulation as originally intended.

#### (5) In-Use Standards

Section 202(a)(1) of the CAA specifies that EPA is to propose emissions standards that are applicable for the useful life of the vehicle. The in-use Phase 2 standards that EPA is proposing would apply to individual vehicles and engines, just as EPA adopted for Phase 1. NHTSA is also proposing to use the same useful life mileage and years as EPA for Phase 2.

EPA is also not proposing any changes to provisions requiring that the useful life for tractors with respect to CO<sub>2</sub> emissions be equal to the respective useful life periods for criteria pollutants, as shown below in Table III-4. See 40 CFR 1037.106(e). EPA does not expect degradation of the technologies evaluated for Phase 2 in terms of CO<sub>2</sub> emissions, therefore we propose no changes to the regulations describing compliance with GHG pollutants with regards to deterioration. See 40 CFR 1037.241. We welcome comments that highlight a need to change this approach.

TABLE III-4—TRACTOR USEFUL LIFE PERIODS

	Years	Miles
Class 7 Tractors .....	10	185,000
Class 8 Tractors .....	10	435,000

#### D. Feasibility of the Proposed Tractor Standards

This section describes the agencies' technical feasibility and cost analysis in

greater detail. Further detail on all of these technologies can be found in the draft RIA Chapter 2.

Class 7 and 8 tractors are used in combination with trailers to transport freight. The variation in the design of these tractors and their typical uses drive different technology solutions for each regulatory subcategory. As noted above, the agencies are proposing to continue the Phase 1 provisions that treat vocational tractors as vocational vehicles instead of as combination tractors, as noted in Section III.C. The focus of this section is on the feasibility of the proposed standards for combination tractors including the heavy-haul tractors, but not the vocational tractors.

EPA and NHTSA collected information on the cost and effectiveness of fuel consumption and CO<sub>2</sub> emission reducing technologies from several sources. The primary sources of information were the Southwest Research Institute evaluation of heavy-duty vehicle fuel efficiency and costs for NHTSA,<sup>134</sup> the Department of Energy's SuperTruck Program,<sup>135</sup> 2010 National Academy of Sciences report of Technologies and Approaches to Reducing the Fuel Consumption of Medium- and Heavy-Duty Vehicles,<sup>136</sup> TIAX's assessment of technologies to support the NAS panel report,<sup>137</sup> the analysis conducted by the Northeast States Center for a Clean Air Future, International Council on Clean Transportation, Southwest Research Institute and TIAX for reducing fuel consumption of heavy-duty long haul combination tractors (the NESCCAF/ICCT study),<sup>138</sup> and the technology cost analysis conducted by ICF for EPA.<sup>139</sup>

<sup>134</sup> Reinhart, T.E. (June 2015). *Commercial Medium- and Heavy-Duty Truck Fuel Efficiency Technology Study—Report #1*. (Report No. DOT HS 812 146). Washington, DC: National Highway Traffic Safety Administration.

<sup>135</sup> U.S. Department of Energy. SuperTruck Initiative. Information available at <http://energy.gov/eere/vehicles/vehicle-technologies-office>.

<sup>136</sup> Committee to Assess Fuel Economy Technologies for Medium- and Heavy-Duty Vehicles; National Research Council; Transportation Research Board (2010). *Technologies and Approaches to Reducing the Fuel Consumption of Medium- and Heavy-Duty Vehicles*. ("The 2010 NAS Report") Washington, DC, The National Academies Press.

<sup>137</sup> TIAX, LLC. "Assessment of Fuel Economy Technologies for Medium- and Heavy-Duty Vehicles," Final Report to National Academy of Sciences, November 19, 2009.

<sup>138</sup> NESCCAF, ICCT, Southwest Research Institute, and TIAX. *Reducing Heavy-Duty Long Haul Combination Truck Fuel Consumption and CO<sub>2</sub> Emissions*. October 2009.

<sup>139</sup> ICF International. "Investigation of Costs for Strategies to Reduce Greenhouse Gas Emissions for

<sup>132</sup> Glider vehicles are new vehicles produced to accept rebuilt engines (or other used engines) along with used axles and/or transmissions. The common commercial term "glider kit" is used here primarily to refer to an assemblage of parts into which the used/rebuilt engine is installed.

<sup>133</sup> Rebuilt engines used in glider vehicles are subject to EPA criteria pollutant emission standards applicable for the model year of the engine. See 40 CFR 86.004-40 for requirements that apply for engine rebuilding. Under existing regulations, engines that remain in their certified configuration after rebuilding may continue to be used.



(1) What technologies did the agencies consider to reduce the CO<sub>2</sub> emissions and fuel consumption of combination tractors?

Manufacturers can reduce CO<sub>2</sub> emissions and fuel consumption of combination tractors through use of many technologies, including engine, drivetrain, aerodynamic, tire, extended idle, and weight reduction technologies. The agencies' determination of the feasibility of the proposed HD Phase 2 standards is based on our projection of the use of these technologies and an assessment of their effectiveness. We will also discuss other technologies that could potentially be used, such as vehicle speed limiters, although we are not basing the proposed standards on their use for the model years covered by this proposal, for various reasons discussed below.

In this section we discuss generally the tractor and engine technologies that the agencies considered to improve performance of heavy-duty tractors, while Section III.D.2 discusses the baseline tractor definition and technology packages the agencies used to determine the proposed standard levels.

*Engine technologies:* As discussed in Section II.D above, there are several engine technologies that can reduce fuel consumption of heavy-duty tractors. These technologies include friction reduction, combustion system optimization, and Rankine cycle. These engine technologies would impact the Phase 2 vehicle results because the agencies propose that the manufacturers enter a fuel map into GEM.

*Aerodynamic technologies:* There are opportunities to reduce aerodynamic drag from the tractor, but it is sometimes difficult to assess the benefit of individual aerodynamic features. Therefore, reducing aerodynamic drag requires optimizing of the entire system. The potential areas to reduce drag include all sides of the truck—front, sides, top, rear and bottom. The grill, bumper, and hood can be designed to minimize the pressure created by the front of the truck. Technologies such as aerodynamic mirrors and fuel tank fairings can reduce the surface area perpendicular to the wind and provide a smooth surface to minimize disruptions of the air flow. Roof fairings provide a transition to move the air smoothly over the tractor and trailer. Side extenders can minimize the air entrapped in the gap between the tractor

and trailer. Lastly, underbelly treatments can manage the flow of air underneath the tractor. DOE has partnered with the heavy-duty industry to demonstrate vehicles that achieve a 50 percent improvement in freight efficiency. This SuperTruck program has led to significant advancements in the aerodynamics of combination tractor-trailers. The manufacturers' SuperTruck demonstration vehicles are achieving approximately 7 percent freight efficiency improvements over a 2010 MY baseline vehicle due to improvements in tractor aerodynamics.<sup>140</sup> The 2010 NAS Report on heavy-duty trucks found that aerodynamic improvements which yield 3 to 4 percent fuel consumption reduction or 6 to 8 percent reduction in Cd values, beyond technologies used in today's SmartWay trucks are achievable.<sup>141</sup>

*Lower Rolling Resistance Tires:* A tire's rolling resistance results from the tread compound material, the architecture and materials of the casing, tread design, the tire manufacturing process, and its operating conditions (surface, inflation pressure, speed, temperature, etc.). Differences in rolling resistance of up to 50 percent have been identified for tires designed to equip the same vehicle. Since 2007, SmartWay designated tractors have had steer tires with rolling resistance coefficients of less than 6.6 kg/metric ton for the steer tire and less than 7.0 kg/metric ton for the drive tire.<sup>142</sup> Low rolling resistance (LRR) drive tires are currently offered in both dual assembly and wide-based single configurations. Wide based single tires can offer rolling resistance reduction along with improved aerodynamics and weight reduction. The lowest rolling resistance value submitted for 2014MY GHG and fuel efficiency certification was 4.3 and 5.0 kg/metric ton for the steer and drive tires respectively.<sup>143</sup>

*Weight Reduction:* Reductions in vehicle mass lower fuel consumption and GHG emissions by decreasing the overall vehicle mass that is moved down the road. Weight reductions also increase vehicle payload capability which can allow additional tons to be carried by fewer trucks consuming less fuel and producing lower emissions on a ton-mile basis. We treated such weight reduction in two ways in Phase 1 to account for the fact that combination

tractor-trailers weigh-out approximately one-third of the time and cube-out approximately two-thirds of the time. Therefore in Phase 1 and also as proposed for Phase 2, one-third of the weight reduction would be added payload in the denominator while two-thirds of the weight reduction is subtracted from the overall weight of the vehicle in GEM. See 76 FR 57153.

In Phase 1, we reflected mass reductions for specific technology substitutions (e.g., installing aluminum wheels instead of steel wheels). These substitutions were included where we could with confidence verify the mass reduction information provided by the manufacturer. The agencies propose to expand the list of weight reduction components which can be input into GEM in order to provide the manufacturers with additional means to comply via GEM with the combination tractor standards and to further encourage reductions in vehicle weight. As in Phase 1, we recognize that there may be additional potential for weight reduction in new high strength steel components which combine the reduction due to the material substitution along with improvements in redesign, as evidenced by the studies done for light-duty vehicles.<sup>144</sup> In the development of the high strength steel component weights, we are only assuming a reduction from material substitution and no weight reduction from redesign, since we do not have any data specific to redesign of heavy-duty components nor do we have a regulatory mechanism to differentiate between material substitution and improved design. Additional weight reduction would be evaluated as a potential off-cycle credit.

*Extended Idle Reduction:* Auxiliary power units (APU), fuel operated heaters, battery supplied air conditioning, and thermal storage systems are among the technologies available today to reduce main engine extended idling from sleeper cabs. Each of these technologies reduces fuel consumption during idling from a truck without this equipment (the baseline) from approximately 0.8 gallons per hour (main engine idling fuel consumption rate) to approximately 0.2 gallons per hour for an APU.<sup>145</sup> EPA and NHTSA agree with the TIAX assessment that a 5 percent reduction in overall fuel consumption reduction is achievable.<sup>146</sup>

<sup>140</sup> Daimler Truck North America. SuperTruck Program Vehicle Project Review. June 19, 2014.

<sup>141</sup> See TIAX, Note 137, Page 4–40.

<sup>142</sup> Ibid.

<sup>143</sup> Memo to Docket. Coefficient of Rolling Resistance Certification Data. See Docket EPA–HQ–OAR–2014–0827.

<sup>144</sup> American Iron and Steel Institute. “A Cost Benefit Analysis Report to the North American Steel Industry on Improved Material and Powertrain Architectures for 21st Century Trucks.”

<sup>145</sup> See the draft RIA Chapter 2.4.8 for details.

<sup>146</sup> See the 2010 NAS Report, Note 136, above, at 128.

*Idle Reduction:* Day cab tractors often idle while cargo is loaded or unloaded, as well as during the frequent stops that are inherent with driving in urban traffic conditions near cargo destinations. To recognize idle reduction technologies that reduce workday idling, the agencies have developed a new idle-only duty cycle that is proposed to be used in GEM. As discussed above in Section II.D, this new proposed certification test cycle would measure the amount of fuel saved and CO<sub>2</sub> emissions reduced by two primary types of technologies: Neutral idle and stop-start. The proposed rules apply this test cycle only to vocational vehicles because these types of vehicles spend more time at idle than tractors. However, the agencies request comment on whether we should extend this vocational vehicle idle reduction approach to day cab tractors. Neutral idle would only be available for tractors using torque-converter automatic transmissions, and stop-start would be available for any tractor. Unlike the fixed numerical value in GEM for automatic engine shutdown systems to reduce overnight idling of combination tractors, this new idle reduction approach would result in different numerical values depending on user inputs. The required inputs and other details about this cycle, as it would apply to vocational vehicles, are described in the draft RIA Chapter 3. If we extended this approach to day cab tractors, we could set a fixed GEM composite cycle weighting factor at a value representative of the time spent at idle for a typical day cab tractor, possibly five percent. Under this approach, tractor manufacturers would be able to select GEM inputs that identify the presence of workday idle reduction technologies, and GEM would calculate the associated benefit due to these technologies, using this new idle-only cycle as described in the draft RIA Chapter 3.

The agencies have also received a letter from the California Air Resources Board requesting consideration of credits for reducing solar loads. Solar reflective paints and solar control glazing technologies are briefly discussed in draft RIA Chapter 2.4.9.3. The agencies request comment on the Air Resources Board's letter and recommendations.<sup>147</sup>

*Vehicle Speed Limiters:* Fuel consumption and GHG emissions increase proportional to the square of

vehicle speed. Therefore, lowering vehicle speeds can significantly reduce fuel consumption and GHG emissions. A vehicle speed limiter (VSL), which limits the vehicle's maximum speed, is another technology option for compliance that is already utilized today by some fleets (though the typical maximum speed setting is often higher than 65 mph).

*Downsized Engines and Downsizing:* As tractor manufacturers continue to reduce the losses due to vehicle loads, such as aerodynamic drag and rolling resistance, the amount of power required to move the vehicle decreases. In addition, engine manufacturers continue to improve the power density of heavy-duty engines through means such as reducing the engine friction due to smaller surface area. These two changes lead to the ability for truck purchasers to select lower displacement engines while maintaining the previous level of performance. Engine downsizing could be more effective if it is combined with the downsizing assuming increased BMEP does not affect durability. The increased efficiency of the vehicle moves the operating points down to a lower load zone on a fuel map, which often moves the engine away from its sweet spot to a less efficient zone. In order to compensate for this loss, downsizing allows the engine to run at a lower engine speed and move back to higher load zones, thus can slightly improve fuel efficiency. Reducing the engine size allows the vehicle operating points to move back to the sweet spot, thus further improving fuel efficiency. Engine downsizing can be accounted for as a vehicle technology through the use of the engine's fuel map in GEM.

*Transmission:* As discussed in the 2010 NAS report, automatic (AT) and automated manual transmissions (AMT) may offer the ability to improve vehicle fuel consumption by optimizing gear selection compared to an average driver.<sup>148</sup> However, as also noted in the report and in the supporting TIAX report, the improvement is very dependent on the driver of the truck, such that reductions ranged from 0 to 8 percent.<sup>149</sup> Well-trained drivers would be expected to perform as well or even better than an automatic transmission

since the driver can see the road ahead and anticipate a changing stoplight or other road condition that neither an automatic nor automated manual transmission can anticipate. However, poorly-trained drivers that shift too frequently or not frequently enough to maintain optimum engine operating conditions could be expected to realize improved in-use fuel consumption by switching from a manual transmission to an automatic or automated manual transmission. As transmissions continue to evolve, we are now seeing in the European heavy-duty vehicle market the addition of dual clutch transmissions (DCT). DCTs operate similar to AMTs, but with two clutches so that the transmission can maintain engine speed during a shift which improves fuel efficiency. We believe there may be real benefits in reduced fuel consumption and GHG emissions through the adoption of dual clutch, automatic or automated manual transmission technology.

*Low Friction Transmission, Axle, and Wheel Bearing Lubricants:* The 2010 NAS report assessed low friction lubricants for the drivetrain as providing a 1 percent improvement in fuel consumption based on fleet testing.<sup>150</sup> A field trial of European medium-duty trucks found an average fuel consumption improvement of 1.8 percent using SAE 5W-30 engine oil, SAE 75W90 axle oil and SAE 75W80 transmission oil when compared to SAE 15W40 engine oil and SAE 90W axle oil, and SAE 80W transmission oil.<sup>151</sup> The light-duty 2012-16 MY vehicle rule and the pickup truck portion of this program estimate that low friction lubricants can have an effectiveness value between 0 and 1 percent compared to traditional lubricants.

*Drivetrain:* Most tractors today have three axles—a steer axle and two rear drive axles, and are commonly referred to as 6x4 tractors. Manufacturers offer 6x2 tractors that include one rear drive axle and one rear non-driving axle. The 6x2 tractors offer three distinct benefits. First, the non-driving rear axle does not have internal friction and therefore reduces the overall parasitic losses in the drivetrain. In addition, the 6x2 configuration typically weighs approximately 300 to 400 lbs less than

<sup>148</sup> Manual transmissions require the driver to shift the gears and manually engage and disengage the clutch. Automatic transmissions shift gears through computer controls and typically include a torque converter. An AMT operates similar to a manual transmission, except that an automated clutch actuator disengages and engages the drivetrain instead of a human driver. An AMT does not include a clutch pedal controllable by the driver or a torque converter.

<sup>149</sup> See TIAX, Note 137, above at 4-70.

<sup>150</sup> See the 2010 NAS Report, Note 136, page 67.

<sup>151</sup> Green, D.A., et al. "The Effect of Engine, Axle, and Transmission Lubricant, and Operating Conditions on Heavy Duty Diesel Fuel Economy. Part 1: Measurements." SAE 2011-01-2129. SAE International Journal of Fuels and Lubricants. January 2012.

<sup>147</sup> California Air Resources Board. Letter from Michael Carter to Matthew Spears dated December 3, 2014. Solar Control: Heavy-Duty Vehicles White Paper. Docket EPA-HA-OAR-2014-0827.

a 6x4 configuration.<sup>152</sup> Finally, the 6x2 typically costs less or is cost neutral when compared to a 6x4 tractor. Sources cite the effectiveness of 6x2 axles at between 1 and 3 percent.<sup>153</sup> Similarly, with the increased use of double and triple trailers, which reduce the weight on the tractor axles when compared to a single trailer, manufacturers offer 4x2 axle configurations. The 4x2 axle configuration would have as good as or better fuel efficiency performance than a 6x2.

**Accessory Improvements:** Parasitic losses from the engine come from many systems, including the water pump, oil pump, and power steering pump. Reductions in parasitic losses are one of the areas being developed under the DOE SuperTruck program. As presented in the DOE Merit reviews, Navistar stated that they demonstrated a 0.45 percent reduction in fuel consumption through water pump improvements and 0.3 percent through oil pump improvements compared to a current engine. In addition, Navistar showed a 0.9 percent benefit for a variable speed water pump and variable displacement oil pump. Detroit Diesel reports a 0.5 percent coming from improved water pump efficiency.<sup>154</sup> It should be noted that water pump improvements include both pump efficiency improvement and variable speed or on/off controls. Lube pump improvements are primarily achieved using variable displacement pumps and may also include efficiency improvement. All of these results shown in this paragraph are demonstrated through the DOE SuperTruck program at single operating point on the engine map, and therefore the overall expected reduction of these technologies is less than the single point result.

**Intelligent Controls:** Skilled drivers know how to control a vehicle to obtain maximum fuel efficiency by, among other things, considering road terrain. For example, the driver may allow the vehicle to slow down below the target speed on an uphill and allow it to go over the target speed when going downhill, to essentially smooth out the engine demand. Electronic controls can be developed to essentially mimic this activity. The agencies propose to provide a 2 percent reduction in fuel consumption and CO<sub>2</sub> emissions for

vehicles configured with intelligent controls, such as predictive cruise control.

**Automatic Tire Inflation Systems:** Proper tire inflation is critical to maintaining proper stress distribution in the tire, which reduces heat loss and rolling resistance. Tires with reduced inflation pressure exhibit a larger footprint on the road, more sidewall flexing and tread shearing, and therefore, have greater rolling resistance than a tire operating at its optimal inflation pressure. Bridgestone tested the effect of inflation pressure and found a 2 percent variation in fuel consumption over a 40 psi range.<sup>155</sup> Generally, a 10 psi reduction in overall tire inflation results in about a 1 percent reduction in fuel economy.<sup>156</sup> To achieve the intended fuel efficiency benefits of low rolling resistance tires, it is critical that tires are maintained at the proper inflation pressure.

Proper tire inflation pressure can be maintained with a rigorous tire inspection and maintenance program or with the use of tire pressure and inflation systems. According to a study conducted by FMCSA in 2003, about 1 in 5 tractors/trucks is operating with 1 or more tires underinflated by at least 20 psi.<sup>157</sup> A 2011 FMCSA study estimated underinflation accounts for one service call per year and increases tire procurement costs 10 to 13 percent. The study found that total operating costs can increase by \$600 to \$800 per year due to underinflation.<sup>158</sup> A recent study by The North American Council on Freight Efficiency, found that adoption of tire pressure monitoring systems is increasing. It also found that reliability and durability of commercially available tire pressure systems are good and early issues with the systems have been addressed.<sup>159</sup> These automatic tire inflation systems monitor tire pressure and also automatically keep tires

inflated to a specific level. The agencies propose to provide a 1 percent CO<sub>2</sub> and fuel consumption reduction value for tractors with automatic tire inflation systems installed.

Tire pressure monitoring systems notify the operator of tire pressure, but require the operator to manually inflate the tires to the optimum pressure. Because of the dependence on the operator's action, the agencies are not proposing to provide a reduction value for tire pressure monitoring systems. We request comment on this approach and seek data from those that support a reduction value be assigned to tire pressure monitoring systems.

**Hybrid:** Hybrid powertrain development in Class 7 and 8 tractors has been limited to a few manufacturer demonstration vehicles to date. One of the key benefit opportunities for fuel consumption reduction with hybrids is less fuel consumption when a vehicle is idling, but the standard is already premised on use of extended idle reduction so use of hybrid technology would duplicate many of the same emission reductions attributable to extended idle reduction. NAS estimated that hybrid systems would cost approximately \$25,000 per tractor in the 2015 through the 2020 time frame and provide a potential fuel consumption reduction of 10 percent, of which 6 percent is idle reduction which can be achieved (less expensively) through the use of other idle reduction technologies.<sup>160</sup> The limited reduction potential outside of idle reduction for Class 8 sleeper cab tractors is due to the mostly highway operation and limited start-stop operation. Due to the high cost and limited benefit during the model years at issue in this action (as well as issues regarding sufficiency of lead time (see Section III.D.2 below), the agencies are not including hybrids in assessing standard stringency (or as an input to GEM).

**Management:** The 2010 NAS report noted many operational opportunities to reduce fuel consumption, such as driver training and route optimization. The agencies have included discussion of several of these strategies in draft RIA Chapter 2, but are not using these approaches or technologies in the standard setting process. The agencies are looking to other resources, such as EPA's SmartWay Transport Partnership and regulations that could potentially be promulgated by the Federal Highway Administration and the Federal Motor Carrier Safety Administration, to continue to encourage the development and utilization of these approaches.

<sup>152</sup> North American Council for Freight Efficiency. "Confidence Findings on the Potential of 6x2 Axles." 2014. Page 16.

<sup>153</sup> Reinhart, T.E. (June 2015). *Commercial Medium- and Heavy-Duty Truck Fuel Efficiency Technology Study—Report #1*. (Report No. DOT HS 812 146). Washington, DC: National Highway Traffic Safety Administration.

<sup>154</sup> See the draft RIA Chapter 2.4 for details.

<sup>155</sup> Bridgestone Tires. Real Questions, Real Answers. [http://www.bridgestonetrucktires.com/us\\_eng/real/magazines/ra\\_special-edit\\_4/ra\\_special4\\_fuel-tires.asp](http://www.bridgestonetrucktires.com/us_eng/real/magazines/ra_special-edit_4/ra_special4_fuel-tires.asp).

<sup>156</sup> "Factors Affecting Truck Fuel Economy," Goodyear, Radial Truck and Retread Service Manual. Accessed February 16, 2010 at [http://www.goodyear.com/truck/pdf/radialretserv/Retread\\_S9\\_V.pdf](http://www.goodyear.com/truck/pdf/radialretserv/Retread_S9_V.pdf).

<sup>157</sup> American Trucking Association. Tire Pressure Monitoring and Inflation Maintenance. June 2010. Page 3. Last accessed on December 15, 2014 at <http://www.trucking.org/ATA%20Docs/About/Organization/TMC/Documents/Position%20Papers/Study%20Group%20Information%20Reports/Tire%20Pressure%20Monitoring%20and%20Inflation%20Maintenance%20%80%94TMC%20I.R.%202010-2.pdf>.

<sup>158</sup> TMC Future Truck Committee Presentation "FMCSA Tire Pressure Monitoring Field Operational Test Results," February 8, 2011.

<sup>159</sup> North American Council for Freight Efficiency, "Tire Pressure Systems," 2013.

<sup>160</sup> See the 2010 NAS Report, Note 136, page 128.

## (2) Projected Technology Effectiveness and Cost

EPA and NHTSA project that CO<sub>2</sub> emissions and fuel consumption reductions can be feasibly and cost-effectively met through technological improvements in several areas. The agencies evaluated each technology and estimated the most appropriate adoption rate of technology into each tractor subcategory. The next sections describe the baseline vehicle configuration, the effectiveness of the individual technologies, the costs of the technologies, the projected adoption rates of the technologies into the regulatory subcategories, and finally the derivation of the proposed standards.

The agencies propose Phase 2 standards that project by 2027, all high-roof tractors would have aerodynamic performance equal to or better today's SmartWay performance—which represents the best of today's technology. This would equate to having 40 percent of new high roof sleeper cabs in 2027 complying with the current best practices and 60 percent of the new high-roof sleeper cab tractors sold in 2027 having better aerodynamic performance than the best tractors available today. For tire rolling resistance, we premised the proposed standards on the assumption that nearly all tires in 2027 would have rolling resistance equal to or superior to tires meeting today's SmartWay designation. As discussed in Section II.D, the agencies assume the proposed 2027 MY engines would achieve an additional 4 percent improvement over Phase 1 engines and we project would include 15 percent of waste heat recovery (WHR) and many other advanced engine technologies. In addition, we are proposing standards that project improvements to nearly all of today's transmissions, incorporation of extended idle reduction technologies on 90 percent of sleeper cabs, and significant adoption of other types of technologies such as predictive cruise

control and automatic tire inflation systems.

In addition to the high cost and limited utility of hybrids for many tractor drive cycles noted above, the agencies believe that hybrid powertrains systems for tractors may not be sufficiently developed and the necessary manufacturing capacity put in place to base a standard on any significant volume of hybrid tractors. Unlike hybrids for vocational vehicles and light-duty vehicles, the agencies are not aware of any full hybrid systems currently developed for long haul tractor applications. To date, hybrid systems for tractors have been primarily focused on idle shutdown technologies and not on the broader energy storage and recovery systems necessary to achieve reductions over typical vehicle drive cycles. The proposed standards reflect the potential for idle shutdown technologies through GEM. Further as highlighted by the 2010 NAS report, the agencies do believe that full hybrid powertrains may have the potential in the longer term to provide significant improvements in tractor fuel efficiency and to greenhouse gas emission reductions. However, due to the high cost, limited benefit during highway driving, and lacking any existing systems or manufacturing base, we cannot conclude with certainty, absent additional information, that such technology would be available for tractors in the 2021–2027 timeframe. However the agencies welcome comment from industry and others on their projected timeline for deployment of hybrid powertrains for tractor applications.

### (a) Tractor Baselines for Costs and Effectiveness

The fuel efficiency and CO<sub>2</sub> emissions of combination tractors vary depending on the configuration of the tractor. Many aspects of the tractor impact its performance, including the engine, transmission, drive axle, aerodynamics, and rolling resistance. For each subcategory, the agencies selected a

theoretical tractor to represent the average 2017 model year tractor that meets the Phase 1 standards (see 76 FR 57212, September 15, 2011). These tractors are used as baselines from which to evaluate costs and effectiveness of additional technologies and standards. The specific attributes of each tractor subcategory are listed below in Table III–5. Using these values, the agencies assessed the CO<sub>2</sub> emissions and fuel consumption performance of the proposed baseline tractors using the proposed version of Phase 2 GEM. The results of these simulations are shown below in Table III–6.

As noted earlier, the Phase 1 2017 model year tractor standards and the baseline 2017 model year tractor results are not directly comparable. The same set of aerodynamic and tire rolling resistance technologies were used in both setting the Phase 1 standards and determining the baseline of the Phase 2 tractors. However, there are several aspects that differ. First, a new version of GEM was developed and validated to provide additional capabilities, including more refined modeling of transmissions and engines. Second, the determination of the proposed HD Phase 2 CdA value takes into account a revised test procedure, a new standard reference trailer, and wind averaged drag as discussed below in Section III.E. In addition, the proposed HD Phase 2 version of GEM includes road grade in the 55 mph and 65 mph highway cycles, as discussed below in Section III.E. Finally, the agencies assessed the current level of automatic engine shutdown and idle reduction technologies used by the tractor manufacturers to comply with the 2014 model year CO<sub>2</sub> and fuel consumption standards. To date, the manufacturers are meeting the 2014 model year standards without the use of this technology. Therefore, in this proposal the agencies reverted back to the baseline APU adoption rate of 30 percent, the value used in the Phase 1 baseline.

TABLE III-5—GEM INPUTS FOR THE BASELINE CLASS 7 AND 8 TRACTOR

Class 7				Class 8					
Day cab			Day cab			Sleeper cab			
Low roof	Mid roof	High roof	Low roof	Mid roof	High roof	Low roof	Mid roof	High roof	
Engine									
2017 MY 11L Engine 350 HP	2017 MY 11L Engine 350 HP	2017 MY 11L Engine 350 HP	2017 MY 15L Engine 455 HP	2017 MY 15L Engine 455 HP	2017 MY 15L Engine 455 HP	2017 MY 15L Engine 455 HP	2017 MY 15L Engine 455 HP	2017 MY 15L Engine 455 HP	2017 MY 15L Engine 455 HP
Aerodynamics (CdA in m <sup>2</sup> )									
5.00	6.40	6.42	5.00	6.40	6.42	4.95	6.35	6.22	
Steer Tires (CRR in kg/metric ton)									
6.99	6.99	6.87	6.99	6.99	6.87	6.87	6.87	6.54	
Drive Tires (CRR in kg/metric ton)									
7.38	7.38	7.26	7.38	7.38	7.26	7.26	7.26	6.92	
Extended Idle Reduction Adoption Rate									
N/A	N/A	N/A	N/A	N/A	N/A	30%	30%	30%	
Transmission = 10 Speed Manual Transmission									
Gear Ratios = 12.8, 9.25, 6.76, 4.90, 3.58, 2.61, 1.89, 1.38, 1.00, 0.73									
Drive Axle Ratio = 3.70									

TABLE III-6—CLASS 7 AND 8 TRACTOR BASELINE CO<sub>2</sub> EMISSIONS AND FUEL CONSUMPTION

	Class 7			Class 8					
	Day cab			Day cab			Sleeper cab		
	Low roof	Mid roof	High roof	Low roof	Mid roof	High roof	Low roof	Mid roof	High roof
CO <sub>2</sub> (grams CO <sub>2</sub> /ton-mile) .....	107	118	121	86	93	95	79	87	88
Fuel Consumption (gal/1,000 ton-mile) .....	10.5	11.6	11.9	8.4	9.1	9.3	7.8	8.5	8.6

The fuel consumption and CO<sub>2</sub> emissions in the baseline described above remains the same over time with no assumed improvements after 2017, absent a Phase 2 regulation. An alternative baseline was also evaluated by the agencies in which there is a continuing uptake of technologies in the tractor market that reduce fuel consumption and CO<sub>2</sub> emissions absent a Phase 2 regulation. This alternative baseline, referred to as the more dynamic baseline, was developed to estimate the effect of market pressures and non-regulatory government initiatives to improve tractor fuel consumption. The more dynamic baseline assumes that the significant level of research funded and conducted by the Federal government, industry, academia and other organizations will, in the future, result the adoption of some technologies beyond the levels required to comply with Phase 1

standards. One example of such research is the Department of Energy Super Truck program<sup>161</sup> which has a goal of demonstrating cost-effective measures to improve the efficiency of Class 8 long-haul freight trucks by 50 percent by 2015. The more dynamic baseline also assumes that manufacturers will not cease offering fuel efficiency improving technologies that currently have significant market penetration, such as automated manual transmissions. The baselines (one for each of the nine tractor types) are characterized by fuel consumption and CO<sub>2</sub> emissions that gradually decrease between 2019 and 2028. In 2028, the fuel consumption for the alternative tractor baselines is approximately 4.0 percent lower than those shown in

<sup>161</sup> U.S. Department of Energy. "SuperTruck Making Leaps in Fuel Efficiency." 2014. Last accessed on May 10, 2015 at <http://energy.gov/eere/articles/supertruck-making-leaps-fuel-efficiency>.

Table III-6. This results from the assumed introduction of aerodynamic technologies such as down exhaust, underbody airflow treatment in addition to tires with lower rolling resistance. The assumed introduction of these technologies reduces the CdA of the baseline tractors and CRR of the tractor tires. To take one example, the CdA for baseline high roof sleeper cabs in Table III-5 is 6.22 (m<sup>2</sup>) in 2018. In 2028, the CdA of a high roof sleeper cab would be assumed to still be 6.22 m<sup>2</sup> in the baseline case outlined above. Alternatively, in the dynamic baseline, the CdA for high roof sleeper cabs is 5.61 (m<sup>2</sup>) in 2028 due to assumed market penetration of technologies absent the Phase 2 regulation. The dynamic baseline analysis is discussed in more detail in draft RIA Chapter 11.

## (b) Tractor Technology Packages

The agencies' assessment of the proposed technology effectiveness was developed through the use of the GEM in coordination with modeling conducted by Southwest Research Institute. The agencies developed the proposed standards through a three-step process, similar to the approach used in Phase 1. First, the agencies developed technology performance characteristics for each technology, as described below. Each technology is associated with an input parameter which in turn would be used as an input to the Phase 2 GEM simulation tool and its effectiveness thereby modeled. The performance levels for the range of Class 7 and 8 tractor aerodynamic packages and vehicle technologies are described below in Table III–7. Second, the agencies combined the technology performance levels with a projected technology adoption rate to determine the GEM inputs used to set the stringency of the proposed standards. Third, the agencies input these parameters into Phase 2 GEM and used the output to determine the proposed CO<sub>2</sub> emissions and fuel consumption levels. All percentage improvements noted below are over the 2017 baseline tractor.

## (i) Engine Improvements

There are several technologies that could be used to improve the efficiency of diesel engines used in tractors. Details of the engine technologies, adoption rates, and overall fuel consumption and CO<sub>2</sub> emission reductions are included in Section II.D. The proposed heavy-duty tractor engine standards would lead to a 1.5 percent reduction in 2021MY, a 3.5 percent reduction in 2024MY, and a 4 percent reduction in 2027MY. These reductions would show up in the fuel map used in GEM.

## (ii) Aerodynamics

The aerodynamic packages are categorized as Bin I, Bin II, Bin III, Bin IV, Bin V, Bin VI, or Bin VII based on the wind averaged drag aerodynamic performance determined through testing conducted by the manufacturer. A more complete description of these aerodynamic packages is included in Chapter 2 of the draft RIA. In general, the proposed CdA values for each package and tractor subcategory were developed through EPA's coastdown testing of tractor-trailer combinations, the 2010 NAS report, and SAE papers.

## (iii) Tire Rolling Resistance

The proposed rolling resistance coefficient target for Phase 2 was developed from SmartWay's tire testing to develop the SmartWay certification, testing a selection of tractor tires as part of the Phase 1 and Phase 2 programs, and from 2014 MY certification data. Even though the coefficient of tire rolling resistance comes in a range of values, to analyze this range, the tire performance was evaluated at four levels for both steer and drive tires, as determined by the agencies. The four levels are the baseline (average) from 2010, Level 1 and Level 2 from Phase 1, and Level 3 that achieves an additional 25 percent improvement over Level 2. The Level 1 rolling resistance performance represents the threshold used to develop SmartWay designated tires for long haul tractors. The Level 2 threshold represents an incremental step for improvements beyond today's SmartWay level and represents the best in class rolling resistance of the tires we tested. The Level 3 values represent the long-term rolling resistance value that the agencies predicts could be achieved in the 2025 timeframe. Given the multiple year phase-in of the standards, the agencies expect that tire manufacturers will continue to respond to demand for more efficient tires and will offer increasing numbers of tire models with rolling resistance values significantly better than today's typical low rolling resistance tires. The tire rolling resistance level assumed to meet the 2017 MY Phase 1 standard high roof sleeper cab is considered to be a weighted average of 10 percent baseline rolling resistance, 70 percent Level 1, and 20 percent Level 2. The tire rolling resistance to meet the 2017MY Phase 1 standards for the high roof day cab, low roof sleeper cab, and mid roof sleeper cab includes 30 percent baseline, 60 percent Level 1 and 10 percent Level 2. Finally, the low roof day cab 2017MY standard can be met with a weighted average rolling resistance consisting of 40 percent baseline, 50 percent Level 1, and 10 percent Level 2.

## (iv) Idle Reduction

The benefits for the extended idle reductions were developed from literature, SmartWay work, and the 2010 NAS report. Additional details regarding the comments and calculations are included in draft RIA Section 2.4.

## (v) Transmission

The benefits for automated manual, automatic, and dual clutch

transmissions were developed from literature and from simulation modeling conducted by Southwest Research Institute. The benefit of these transmissions is proposed to be set to a two percent improvement over a manual transmission due to the automation of the gear shifting.

## (vi) Drivetrain

The reduction in friction due to low viscosity axle lubricants is set to 0.5 percent. 6x4 and 4x2 axle configurations lead to a 2.5 percent improvement in vehicle efficiency. Downspeeding would be as demonstrated through the Phase 2 GEM inputs of transmission gear ratio, drive axle ratio, and tire diameter. Downspeeding is projected to improve the fuel consumption by 1.8 percent.

## (vii) Accessories and Other Technologies

Compared to 2017MY air conditioners, air conditioners with improved efficiency compressors will reduce CO<sub>2</sub> emissions by 0.5 percent. Improvements in accessories, such as power steering, can lead to an efficiency improvement of 1 percent over the 2017MY baseline. Based on literature information, intelligent controls such as predictive cruise control will reduce CO<sub>2</sub> emissions by 2 percent while automatic tire inflation systems improve fuel consumption by 1 percent by keeping tire rolling resistance to its optimum based on inflation pressure.

## (viii) Weight Reduction

The weight reductions were developed from tire manufacturer information, the Aluminum Association, the Department of Energy, SABIC and TIAX, as discussed above in Section II.B.3.e.

## (ix) Vehicle Speed Limiter

The agencies did not consider the availability of vehicle speed limiter technology in setting the Phase 1 stringency levels, and again did not consider the availability of the technology in developing regulatory alternatives for Phase 2. However, as described in more detail above, speed limiters could be an effective means for achieving compliance, if employed on a voluntary basis.

## (x) Summary of Technology Performance

Table III–7 describes the performance levels for the range of Class 7 and 8 tractor vehicle technologies.

TABLE III-7—PROPOSED PHASE 2 TECHNOLOGY INPUTS

	Class 7			Class 8					
	Day cab			Day cab			Sleeper cab		
	Low roof	Mid roof	High roof	Low roof	Mid roof	High roof	Low roof	Mid roof	High roof
<b>Engine</b>									
	2021MY 11L Engine 350 HP	2021MY 11L Engine 350 HP	2021MY 11L Engine 350 HP	2021MY 15L Engine 455 HP	2021MY 15L Engine 455 HP	2021MY 15L Engine 455 HP	2021MY 15L Engine 455 HP	2021MY 15L Engine 455 HP	2021MY 15L Engine 455 HP
<b>Aerodynamics (CdA in m<sup>2</sup>)</b>									
Bin I .....	5.3	6.7	7.6	5.3	6.7	7.6	5.3	6.7	7.4
Bin II .....	4.8	6.2	7.1	4.8	6.2	7.1	4.8	6.2	6.9
Bin III .....	4.3	5.7	6.5	4.3	5.7	6.5	4.3	5.7	6.3
Bin IV .....	4.0	5.4	5.8	4.0	5.4	5.8	4.0	5.4	5.6
Bin V .....	N/A	N/A	5.3	N/A	N/A	5.3	N/A	N/A	5.1
Bin VI .....	N/A	N/A	4.9	N/A	N/A	4.9	N/A	N/A	4.7
Bin VII .....	N/A	N/A	4.5	N/A	N/A	4.5	N/A	N/A	4.3
<b>Steer Tires (CRR in kg/metric ton)</b>									
Base .....	7.8	7.8	7.8	7.8	7.8	7.8	7.8	7.8	7.8
Level 1 .....	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6
Level 2 .....	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7
Level 3 .....	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3
<b>Drive Tires (CRR in kg/metric ton)</b>									
Base .....	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2
Level 1 .....	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0
Level 2 .....	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
Level 3 .....	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
<b>Idle Reduction (% reduction)</b>									
APU .....	N/A	N/A	N/A	N/A	N/A	N/A	5%	5%	5%
Other .....	N/A	N/A	N/A	N/A	N/A	N/A	7%	7%	7%
<b>Transmission Type (% reduction)</b>									
Manual .....	0%	0%	0%	0%	0%	0%	0%	0%	0%
AMT .....	2	2	2	2	2	2	2	2	2
Auto .....	2	2	2	2	2	2	2	2	2
Dual Clutch .....	2	2	2	2	2	2	2	2	2
<b>Driveline (% reduction)</b>									
Axle Lubricant .....	0.5%	0.5%	0.5%	0.5%	0.5%	0.5%	0.5%	0.5%	0.5%
6×2 or 4×2 Axle .....	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Downspeed .....	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
<b>Accessory Improvements (% reduction)</b>									
A/C .....	0.5%	0.5%	0.5%	0.5%	0.5%	0.5%	0.5%	0.5%	0.5%
Electric Access .....	1	1	1	1	1	1	1	1	1
<b>Other Technologies (% reduction)</b>									
Predictive Cruise Control .....	2%	2%	2%	2%	2%	2%	2%	2%	2%
Automated Tire Inflation System ..	1	1	1	1	1	1	1	1	1

## (c) Tractor Technology Adoption Rates

As explained above, tractor manufacturers often introduce major product changes together, as a package. In this manner the manufacturers can optimize their available resources, including engineering, development,

manufacturing and marketing activities to create a product with multiple new features. In addition, manufacturers recognize that a truck design will need to remain competitive over the intended life of the design and meet future regulatory requirements. In some

limited cases, manufacturers may implement an individual technology outside of a vehicle's redesign cycle.

With respect to the levels of technology adoption used to develop the proposed HD Phase 2 standards, NHTSA and EPA established technology

adoption constraints. The first type of constraint was established based on the application of fuel consumption and CO<sub>2</sub> emission reduction technologies into the different types of tractors. For example, extended idle reduction technologies are limited to Class 8 sleeper cabs using the reasonable assumption that day cabs are not used for overnight hoteling. A second type of constraint was applied to most other technologies and limited their adoption based on factors reflecting the real world operating conditions that some combination tractors encounter. This second type of constraint was applied to the aerodynamic, tire, powertrain, and vehicle speed limiter technologies.

Table III–8 and Table III–10, specify the adoption rates that EPA and NHTSA used to develop the proposed standards. The agencies welcome comments on these adoption rates.

NHTSA and EPA believe that within each of these individual vehicle categories there are particular applications where the use of the identified technologies would be either ineffective or not technically feasible. For example, the agencies are not predicating the proposed standards on the use of full aerodynamic vehicle treatments on 100 percent of tractors because we know that in many applications (for example gravel truck engaged in local aggregate delivery) the added weight of the aerodynamic technologies will increase fuel consumption and hence CO<sub>2</sub> emissions to a greater degree than the reduction that would be accomplished from the more aerodynamic nature of the tractor.

#### (i) Aerodynamics Adoption Rate

The impact of aerodynamics on a tractor-trailer's efficiency increases with vehicle speed. Therefore, the usage pattern of the vehicle will determine the benefit of various aerodynamic technologies. Sleeper cabs are often used in line haul applications and drive the majority of their miles on the highway travelling at speeds greater than 55 mph. The industry has focused aerodynamic technology development, including SmartWay tractors, on these types of trucks. Therefore the agencies are proposing the most aggressive aerodynamic technology application to this regulatory subcategory. All of the major manufacturers today offer at least one SmartWay sleeper cab tractor model, which is represented as Bin III aerodynamic performance. The proposed aerodynamic adoption rate for Class 8 high roof sleeper cabs in 2027 (*i.e.*, the degree of technology adoption on which the stringency of the proposed standard is premised) consists of 20

percent of Bin IV, 35 percent Bin V, 20 percent Bin VI, and 5 percent Bin VII reflecting our assessment of the fraction of tractors in this segment that could successfully apply these aerodynamic packages with this amount of lead time. We believe that there is sufficient lead time to develop aerodynamic tractors that can move the entire high roof sleeper cab aerodynamic performance to be as good as or better than today's SmartWay designated tractors. The changes required for Bin IV and better performance reflect the kinds of improvements projected in the Department of Energy's SuperTruck program. That program assumes that such systems can be demonstrated on vehicles by 2017. In this case, the agencies are projecting that truck manufacturers would be able to begin implementing these aerodynamic technologies as early as 2021 MY on a limited scale. Importantly, our averaging, banking and trading provisions provide manufacturers with the flexibility (and incentive) to implement these technologies over time even though the standard changes in a single step.

The aerodynamic adoption rates used to develop the proposed standards for the other tractor regulatory categories are less aggressive than for the Class 8 sleeper cab high roof. Aerodynamic improvements through new tractor designs and the development of new aerodynamic components is an inherently slow and iterative process. The agencies recognize that there are tractor applications which require on/off-road capability and other truck functions which restrict the type of aerodynamic equipment applicable. We also recognize that these types of trucks spend less time at highway speeds where aerodynamic technologies have the greatest benefit. The 2002 VIUS data ranks trucks by major use.<sup>162</sup> The heavy trucks usage indicates that up to 35 percent of the trucks may be used in on/off-road applications or heavier applications. The uses include construction (16 percent), agriculture (12 percent), waste management (5 percent), and mining (2 percent). Therefore, the agencies analyzed the technologies to evaluate the potential restrictions that would prevent 100 percent adoption of more advanced aerodynamic technologies for all of the tractor regulatory subcategories.

As discussed in Section III.C.2, the agencies propose to increase the number of aerodynamic bins for low and mid roof tractors from the two levels adopted

in Phase 1 to four levels in Phase 2. The agencies propose to increase the number of bins for these tractors to reflect the actual range of aerodynamic technologies effective in low and mid roof tractor applications. The aerodynamic improvements to the bumper, hood, windshield, mirrors, and doors are developed for the high roof tractor application and then carried over into the low and mid roof applications.

#### (ii) Low Rolling Resistance Tire Adoption Rate

For the tire manufacturers to further reduce tire rolling resistance, the manufacturers must consider several performance criteria that affect tire selection. The characteristics of a tire also influence durability, traction control, vehicle handling, comfort, and retreadability. A single performance parameter can easily be enhanced, but an optimal balance of all the criteria will require improvements in materials and tread design at a higher cost, as estimated by the agencies. Tire design requires balancing performance, since changes in design may change different performance characteristics in opposing directions. Similar to the discussion regarding lesser aerodynamic technology application in tractor segments other than sleeper cab high roof, the agencies believe that the proposed standards should not be premised on 100 percent application of Level 3 tires in all tractor segments given the potential interference with vehicle utility that could result.

#### (iii) Weight Reduction Technology Adoption Rate

Unlike in HD Phase 1, the agencies propose setting the 2021 through 2027 model year tractor standards without using weight reduction as a technology to demonstrate the feasibility. However, as described in Section III.C.2 below, the agencies are proposing an expanded list of weight reduction options which could be input into the GEM by the manufacturers to reduce their certified CO<sub>2</sub> emission and fuel consumption levels. The agencies view weight reduction as a technology with a high cost that offers a small benefit in the tractor sector. For example, our estimate of a 400 pound weight reduction would cost \$2,050 (2012\$) in 2021MY, but offers a 0.3 percent reduction in fuel consumption and CO<sub>2</sub> emissions.

#### (iv) Idle Reduction Technology Adoption Rate

Idle reduction technologies provide significant reductions in fuel consumption and CO<sub>2</sub> emissions for Class 8 sleeper cabs and are available on

<sup>162</sup> U.S. Department of Energy. *Transportation Energy Data Book*, Edition 28–2009. Table 5.7.



the market today. There are several different technologies available to reduce idling. These include APUs, diesel fired heaters, and battery powered units. Our discussions with manufacturers indicate that idle technologies are sometimes installed in the factory, but it is also a common practice to have the units installed after the sale of the truck. We would like to continue to incentivize this practice and to do so in a manner that the emission reductions associated with idle reduction technology occur in use. Therefore, as adopted in Phase 1, we are allowing only idle emission reduction technologies which include an automatic engine shutoff (AES) with some override provisions.<sup>163</sup> However, we welcome comment on other approaches that would appropriately quantify the reductions that would be experienced in the real world.

We propose an overall 90 percent adoption rate for this technology for Class 8 sleeper cabs. The agencies are unaware of reasons why AES with extended idle reduction technologies could not be applied to this high fraction of tractors with a sleeper cab, except those deemed a vocational tractor, in the available lead time.

The agencies are interested in extending the idle reduction benefits beyond Class 8 sleepers, to day cabs. The agencies reviewed literature to quantify the amount of idling which is conducted outside of hoteling operations. One study, conducted by Argonne National Laboratory, identified several different types of trucks which might idle for extended amounts of time during the work day.<sup>164</sup> Idling may occur during the delivery process, queuing at loading docks or border crossings, during power take off operations, or to provide comfort during the work day. However, the study provided only "rough estimates" of the idle time and energy use for these vehicles. The agencies are not able to appropriately develop a baseline of workday idling for day cabs and identify

the percent of this idling which could be reduced through the use of AES. We welcome comment and data on quantifying the effectiveness of AES on day cabs.

#### (v) Vehicle Speed Limiter Adoption Rate

As adopted in Phase 1, we propose to continue the approach where vehicle speed limiters may be used as a technology to meet the proposed standard. In setting the proposed standard, however, we assumed a zero percent adoption rate of vehicle speed limiters. Although we believe vehicle speed limiters are a simple, easy to implement, and inexpensive technology, we want to leave the use of vehicles speed limiters to the truck purchaser. Since truck fleets purchase tractors today with owner-set vehicle speed limiters, we considered not including VSLs in our compliance model. However, we have concluded that we should allow the use of VSLs that cannot be overridden by the operator as a means of compliance for vehicle manufacturers that wish to offer it and truck purchasers that wish to purchase the technology. In doing so, we are providing another means of meeting that standard that can lower compliance cost and provide a more optimal vehicle solution for some truck fleets or owners. For example, a local beverage distributor may operate trucks in a distribution network of primarily local roads. Under those conditions, aerodynamic fairings used to reduce aerodynamic drag provide little benefit due to the low vehicle speed while adding additional mass to the vehicle. A vehicle manufacturer could choose to install a VSL set at 55 mph for this vehicle at the request of the customer. The resulting tractor would be optimized for its intended application and would be fully compliant with our program all at a lower cost to the ultimate tractor purchaser.<sup>165</sup>

<sup>165</sup> Ibid.

The agencies note that because a VSL value can be input into GEM, its benefits can be directly assessed with the model and off cycle credit applications therefore are not necessary even though the proposed standard is not based on performance of VSLs (*i.e.* VSL is an on-cycle technology).

As in Phase 1, we have chosen not to base the proposed standards on performance of VSLs because of concerns about how to set a realistic adoption rate that avoids unintended adverse impacts. Although we expect there would be some use of VSL, currently it is used when the fleet involved decides it is feasible and practicable and increases the overall efficiency of the freight system for that fleet operator. To date, the compliance data provided by manufacturers indicate that none of the tractor configurations include a tamper-proof VSL setting less than 65 mph. At this point the agencies are not in a position to determine in how many additional situations use of a VSL would result in similar benefits to overall efficiency or how many customers would be willing to accept a tamper-proof VSL setting. As discussed in Section III.E.2.f below, we welcome comment on suggestions to modify the tamper-proof requirement while maintaining assurance that the speed limiter is used in-use throughout the life of the vehicle. We are not able at this time to quantify the potential loss in utility due to the use of VSLs, but we welcome comment on whether the use of a VSL would require a fleet to deploy additional tractors. Absent this information, we cannot make a determination regarding the reasonableness of setting a standard based on a particular VSL level. Therefore, the agencies are not premising the proposed standards on use of VSL, and instead would continue to rely on the industry to select VSL when circumstances are appropriate for its use. The agencies have not included either the cost or benefit due to VSLs in analysis of the proposed program's costs and benefits, therefore it remains a significant flexibility for manufacturers to choose.

#### (vi) Summary of the Adoption Rates Used To Determine the Proposed Standards

Table III-8 through Table III-10 provide the adoption rates of each technology broken down by weight class, cab configuration, and roof height.

<sup>163</sup> The agencies are proposing to continue the HD Phase 1 AES override provisions included in 40 CFR 1037.660(b) for driver safety.

<sup>164</sup> Gaines, L., A. Vyas, J. Anderson. Estimation of Fuel Use by Idling Commercial Trucks. January 2006.

[illegible]

TABLE III-9—TECHNOLOGY ADOPTION RATES FOR CLASS 7 AND 8 TRACTORS FOR DETERMINING THE PROPOSED 2024 MY STANDARDS

[illegible]

TABLE III–10—TECHNOLOGY ADOPTION RATES FOR CLASS 7 AND 8 TRACTORS FOR DETERMINING THE PROPOSED 2027 MY STANDARDS

	Class 7			Class 8					
	Day cab			Day cab			Sleeper cab		
	Low roof %	Mid roof %	High roof %	Low roof %	Mid roof %	High roof %	Low roof %	Mid roof %	High roof %
<b>2027 MY Engine Technology Package</b>									
	100	100	100	100	100	100	100	100	100
<b>Aerodynamics</b>									
Bin I .....	0	0	0	0	0	0	0	0	0
Bin II .....	50	50	0	50	50	0	50	50	0
Bin III .....	40	40	20	40	40	20	40	40	20
Bin IV .....	10	10	20	10	10	20	10	10	20
Bin V .....	N/A	N/A	35	N/A	N/A	35	N/A	N/A	35
Bin VI .....	N/A	N/A	20	N/A	N/A	20	N/A	N/A	20
Bin VII .....	N/A	N/A	5	N/A	N/A	5	N/A	N/A	5
<b>Steer Tires</b>									
Base .....	5	5	5	5	5	5	5	5	5
Level 1 .....	20	20	20	20	20	20	20	20	20
Level 2 .....	50	50	50	50	50	50	50	50	50
Level 3 .....	25	25	25	25	25	25	25	25	25
<b>Drive Tires</b>									
Base .....	5	5	5	5	5	5	5	5	5
Level 1 .....	20	20	20	20	20	20	20	20	20
Level 2 .....	50	50	50	50	50	50	50	50	50
Level 3 .....	25	25	25	25	25	25	25	25	25
<b>Extended Idle Reduction</b>									
APU .....	N/A	N/A	N/A	N/A	N/A	N/A	90	90	90
<b>Transmission Type</b>									
Manual .....	10	10	10	10	10	10	10	10	10
AMT .....	50	50	50	50	50	50	50	50	50
Auto .....	30	30	30	30	30	30	30	30	30
Dual Clutch .....	10	10	10	10	10	10	10	10	10
<b>Driveline</b>									
Axle Lubricant .....	40	40	40	40	40	40	40	40	40
6x2 Axle .....				20	20	60	20	20	60
Downspeed .....	60	60	60	60	60	60	60	60	60
Direct Drive .....	50	50	50	50	50	50	50	50	50
<b>Accessory Improvements</b>									
A/C .....	30	30	30	30	30	30	30	30	30
Electric Access. ....	30	30	30	30	30	30	30	30	30
<b>Other Technologies</b>									
Predictive Cruise Control .....	40	40	40	40	40	40	40	40	40
Automated Tire Inflation System ..	40	40	40	40	40	40	40	40	40

## (d) Derivation of the Proposed Tractor Standards

The agencies used the technology effectiveness inputs and technology adoption rates to develop GEM inputs to derive the proposed HD Phase 2 fuel consumption and CO<sub>2</sub> emissions standards for each subcategory of Class

7 and 8 combination tractors. Note that we have analyzed *one* technology pathway for each proposed level of stringency, but manufacturers would be free to use any combination of technology to meet the standards, and with the flexibility of averaging, banking and trading, to meet the standard on

average. The agencies derived a scenario tractor for each subcategory by weighting the individual GEM input parameters included in Table III–7 with the adoption rates in Table III–8 through Table III–10. For example, the proposed CdA value for a 2021MY Class 8 Sleeper Cab High Roof scenario case was

derived as 40 percent times 6.3 plus 35 percent times 5.6 plus 20 percent times 5.1 plus 5 percent times 4.7, which is equal to a CdA of 5.74 m<sup>2</sup>. Similar calculations were made for tire rolling resistance, transmission types, idle

reduction, and other technologies. To account for the proposed engine standards and engine technologies, the agencies assumed a compliant engine fuel map in GEM.<sup>166</sup> The agencies then ran GEM with a single set of vehicle

inputs, as shown in Table III–11, to derive the proposed standards for each subcategory. Additional detail is provided in the draft RIA Chapter 2.

TABLE III–11—GEM INPUTS FOR THE PROPOSED 2021MY CLASS 7 AND 8 TRACTOR STANDARD SETTING

Class 7			Class 8					
Day cab			Day cab			Sleeper cab		
Low roof	Mid roof	High roof	Low roof	Mid roof	High roof	Low roof	Mid roof	High roof
Engine								
2021MY 11L Engine 350 HP	2021MY 11L Engine 350 HP	2021MY 11L Engine 350 HP	2021MY 15L Engine 455 HP	2021MY 15L Engine 455 HP	2021MY 15L Engine 455 HP	2021MY 15L Engine 455 HP	2021MY 15L Engine 455 HP	2021MY 15L Engine 455 HP
Aerodynamics (CdA in m <sup>2</sup> )								
4.68	6.08	5.94	4.68	6.08	5.94	4.68	6.08	5.74
Steer Tires (CRR in kg/metric ton)								
6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
Drive Tires (CRR in kg/metric ton)								
6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6
Extended Idle Reduction Weighted Effectiveness								
N/A	N/A	N/A	N/A	N/A	N/A	2.5%	2.5%	2.5%
Transmission = 10 speed Automated Manual Transmission								
Gear Ratios = 12.8, 9.25, 6.76, 4.90, 3.58, 2.61, 1.89, 1.38, 1.00, 0.73								
Drive axle Ratio = 3.55								
6x2 Axle Weighted Effectiveness								
N/A	N/A	N/A	0.3%	0.3%	0.5%	0.3%	0.3%	0.5%
Low Friction Axle Lubrication = 0.1%								
Transmission benefit = 1.1%								
Predictive Cruise Control = 0.4%								
Accessory Improvements = 0.1%								
Air Conditioner Efficiency Improvements = 0.1%								
Automatic Tire Inflation Systems = 0.2%								
Weight Reduction = 0 lbs								

<sup>166</sup> See Section II.D above explaining the derivation of the proposed engine standards.

TABLE III-12—GEM INPUTS FOR THE PROPOSED 2024MY CLASS 7 AND 8 TRACTOR STANDARD SETTING

Class 7			Class 8					
Day cab			Day cab			Sleeper cab		
Low roof	Mid roof	High roof	Low roof	Mid roof	High roof	Low roof	Mid roof	High roof
Engine								
2024MY 11L Engine 350 HP	2024MY 11L Engine 350 HP	2024MY 11L Engine 350 HP	2024MY 15L Engine 455 HP	2024MY 15L Engine 455 HP	2024MY 15L Engine 455 HP	2024MY 15L Engine 455 HP	2024MY 15L Engine 455 HP	2024MY 15L Engine 455 HP
Aerodynamics (CdA in m²)								
4.59	5.99	5.74	4.59	5.99	5.74	4.59	5.99	5.54
Steer Tires (CRR in kg/metric ton)								
5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9
Drive Tires (CRR in kg/metric ton)								
6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
Extended Idle Reduction Weighted Effectiveness								
N/A	N/A	N/A	N/A	N/A	N/A	3%	3%	3%
Transmission = 10 speed Automated Manual Transmission								
Gear Ratios = 12.8, 9.25, 6.76, 4.90, 3.58, 2.61, 1.89, 1.38, 1.00, 0.73								
Drive axle Ratio = 3.36								
6x2 Axle Weighted Effectiveness								
N/A	N/A	N/A	0.5%	0.5%	1.5%	0.5%	0.5%	1.5%
Low Friction Axle Lubrication = 0.2%								
Transmission benefit = 1.6%								
Predictive Cruise Control = 0.8%								
Accessory Improvements = 0.2%								
Air Conditioner Efficiency Improvements = 0.1%								
Automatic Tire Inflation Systems = 0.4%								
Weight Reduction = 0 lbs								
Direct Drive Weighted Efficiency = 1% for sleeper cabs; 0.8% for day cabs								

TABLE III-13—GEM INPUTS FOR THE PROPOSED 2027MY CLASS 7 AND 8 TRACTOR STANDARD SETTING

[illegible]

TABLE III-13—GEM INPUTS FOR THE PROPOSED 2027MY CLASS 7 AND 8 TRACTOR STANDARD SETTING—Continued

Class 7			Class 8					
Day cab			Day cab			Sleeper cab		
Low roof	Mid roof	High roof	Low roof	Mid roof	High roof	Low roof	Mid roof	High roof
<b>Drive Tires (CRR in kg/metric ton)</b>								
5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9
<b>Extended Idle Reduction Weighted Effectiveness</b>								
N/A	N/A	N/A	N/A	N/A	N/A	3%	3%	3%
<b>Transmission = 10 speed Automated Manual Transmission</b>								
<b>Gear Ratios = 12.8, 9.25, 6.76, 4.90, 3.58, 2.61, 1.89, 1.38, 1.00, 0.73</b>								
<b>Drive axle Ratio = 3.2</b>								
<b>6x2 Axle Weighted Effectiveness</b>								
N/A	N/A	N/A	0.5%	0.5%	1.5%	0.5%	0.5%	1.5%
<b>Low Friction Axle Lubrication = 0.2%</b>								
<b>Transmission benefit = 1.8%</b>								
<b>Predictive Cruise Control = 0.8%</b>								
<b>Accessory Improvements = 0.3%</b>								
<b>Air Conditioner Efficiency Improvements = 0.2%</b>								
<b>Automatic Tire Inflation Systems = 0.4%</b>								
<b>Weight Reduction = 0 lbs</b>								
<b>Direct Drive Weighted Efficiency = 1% for sleeper cabs; 0.8% for day cabs</b>								

The proposed level of the 2027 model year standards, in addition to the phase-in standards in model years 2021 and 2024 for each subcategory is included in Table III-14.

TABLE III-14—PROPOSED 2021, 2024, AND 2027 MODEL YEAR TRACTOR STANDARDS

	Day cab		Sleeper Cab
	Class 7	Class 8	Class 8
<b>2021 Model Year CO<sub>2</sub> Grams per Ton-Mile</b>			
Low Roof .....	97	78	70
Mid Roof .....	107	84	78
High Roof .....	109	86	77
<b>2021 Model Year Gallons of Fuel per 1,000 Ton-Mile</b>			
Low Roof .....	9.5285	7.6621	6.8762
Mid Roof .....	10.5108	8.2515	7.6621
High Roof .....	10.7073	8.4479	7.5639
<b>2024 Model Year CO<sub>2</sub> Grams per Ton-Mile</b>			
Low Roof .....	90	72	64
Mid Roof .....	100	78	71
High Roof .....	101	79	70
<b>2024 Model Year and Later Gallons of Fuel per 1,000 Ton-Mile</b>			
Low Roof .....	8.8409	7.0727	6.2868
Mid Roof .....	9.8232	7.6621	6.9745
High Roof .....	9.9214	7.7603	6.8762

TABLE III-14—PROPOSED 2021, 2024, AND 2027 MODEL YEAR TRACTOR STANDARDS—Continued

	Day cab		Sleeper Cab
	Class 7	Class 8	Class 8
<b>2027 Model Year CO<sub>2</sub> Grams per Ton-Mile</b>			
Low Roof .....	87	70	62
Mid Roof .....	96	76	69
High Roof .....	96	76	67
<b>2027 Model Year and Later Gallons of Fuel per 1,000 Ton-Mile</b>			
Low Roof .....	8.5462	6.8762	6.0904
Mid Roof .....	9.4303	7.4656	6.7780
High Roof .....	9.4303	7.4656	6.5815

A summary of the draft technology package costs is included in Table III-15 through Table III-17 for MYs 2021,

2024, and 2027, respectively, with additional details available in the draft

RIA Chapter 2.12. We welcome comments on the technology costs.

TABLE III-15—CLASS 7 AND 8 TRACTOR TECHNOLOGY INCREMENTAL COSTS IN THE 2021 MODEL YEAR<sup>a b</sup> PREFERRED ALTERNATIVE VS. THE LESS DYNAMIC BASELINE  
[2012\$ per vehicle]

	Class 7		Class 8				
	Day cab		Day cab		Sleeper cab		
	Low/mid roof	High roof	Low/mid roof	High roof	Low roof	Mid roof	High roof
Engine <sup>c</sup> .....	\$314	\$314	\$314	\$314	\$314	\$314	\$314
Aerodynamics .....	687	511	687	511	656	656	535
Tires .....	49	9	81	15	59	59	15
Tire inflation system .....	180	180	180	180	180	180	180
Transmission .....	3,969	3,969	3,969	3,969	3,969	3,969	3,969
Axle & axle lubes .....	50	50	70	90	70	70	90
Idle reduction with APU .....	0	0	0	0	2,449	2,449	2,449
Air conditioning .....	45	45	45	45	45	45	45
Other vehicle technologies .....	174	174	174	174	174	174	174
Total .....	5,468	5,252	5,520	5,298	7,916	7,916	7,771

**Notes:**

<sup>a</sup>Costs shown are for the 2021 model year and are incremental to the costs of a tractor meeting the Phase 1 standards. These costs include indirect costs via markups along with learning impacts. For a description of the markups and learning impacts considered in this analysis and how it impacts technology costs for other years, refer to Chapter 2 of the draft RIA (see draft RIA 2.12).

<sup>b</sup>Note that values in this table include adoption rates. Therefore, the technology costs shown reflect the average cost expected for each of the indicated tractor classes. To see the actual estimated technology costs exclusive of adoption rates, refer to Chapter 2 of the draft RIA (see draft RIA 2.12 in particular).

<sup>c</sup>Engine costs are for a heavy HD diesel engine meant for a combination tractor. The engine costs in this table are equal to the engine costs associated with the separate engine standard because both include the same set of engine technologies (see Section II.D.2.d.i).

TABLE III-16—CLASS 7 AND 8 TRACTOR TECHNOLOGY INCREMENTAL COSTS IN THE 2024 MODEL YEAR<sup>a b</sup> PREFERRED ALTERNATIVE VS. THE LESS DYNAMIC BASELINE  
[2012\$ per vehicle]

	Class 7		Class 8				
	Day cab		Day cab		Sleeper cab		
	Low/mid roof	High roof	Low/mid roof	High roof	Low roof	Mid roof	High roof
Engine <sup>c</sup> .....	\$904	\$904	\$904	\$904	\$904	\$904	\$904
Aerodynamics .....	744	684	744	684	712	712	723
Tires .....	47	11	78	18	58	58	18
Tire inflation system .....	330	330	330	330	330	330	330
Transmission .....	5,883	5,883	5,883	5,883	5,883	5,883	5,883
Axle & axle lubes .....	92	92	128	200	128	128	200
Idle reduction with APU .....	0	0	0	0	2,687	2,687	2,687
Air conditioning .....	82	82	82	82	82	82	82



TABLE III-16—CLASS 7 AND 8 TRACTOR TECHNOLOGY INCREMENTAL COSTS IN THE 2024 MODEL YEAR <sup>a b</sup> PREFERRED ALTERNATIVE VS. THE LESS DYNAMIC BASELINE—Continued  
[2012\$ per vehicle]

	Class 7		Class 8				
	Day cab		Day cab		Sleeper cab		
	Low/mid roof	High roof	Low/mid roof	High roof	Low roof	Mid roof	High roof
Other vehicle technologies .....	318	318	318	318	318	318	318
Total .....	8,400	8,304	8,467	8,419	11,102	11,102	11,145

**Notes:**

<sup>a</sup> Costs shown are for the 2024 model year and are incremental to the costs of a tractor meeting the Phase 1 standards. These costs include indirect costs via markups along with learning impacts. For a description of the markups and learning impacts considered in this analysis and how it impacts technology costs for other years, refer to Chapter 2 of the draft RIA (see draft RIA 2.12).

<sup>b</sup> Note that values in this table include adoption rates. Therefore, the technology costs shown reflect the average cost expected for each of the indicated tractor classes. To see the actual estimated technology costs exclusive of adoption rates, refer to Chapter 2 of the draft RIA (see draft RIA 2.12).

<sup>c</sup> Engine costs are for a heavy HD diesel engine meant for a combination tractor. The engine costs in this table are equal to the engine costs associated with the separate engine standard because both include the same set of engine technologies (see Section II.D.2.d.i).

TABLE III-17—CLASS 7 AND 8 TRACTOR TECHNOLOGY INCREMENTAL COSTS IN THE 2027 MODEL YEAR <sup>a b</sup> PREFERRED ALTERNATIVE VS. THE LESS DYNAMIC BASELINE  
[2012\$ per vehicle]

	Class 7		Class 8				
	Day cab		Day cab		Sleeper cab		
	Low/mid roof	High roof	Low/mid roof	High roof	Low roof	Mid roof	High roof
Engine <sup>c</sup> .....	\$1,698	\$1,698	\$1,698	\$1,698	\$1,698	\$1,698	\$1,698
Aerodynamics .....	771	765	771	765	733	733	802
Tires .....	45	10	75	17	56	56	17
Tire inflation system .....	314	314	314	314	314	314	314
Transmission .....	6,797	6,797	6,797	6,797	6,797	6,797	6,797
Axle & axle lubes .....	97	97	131	200	131	131	200
Idle reduction with APU .....	0	0	0	0	2,596	2,596	2,596
Air conditioning .....	117	117	117	117	117	117	117
Other vehicle technologies .....	302	302	302	302	302	302	302
Total .....	10,140	10,099	10,204	10,209	12,744	12,744	12,842

**Notes:**

<sup>a</sup> Costs shown are for the 2027 model year and are incremental to the costs of a tractor meeting the Phase 1 standards. These costs include indirect costs via markups along with learning impacts. For a description of the markups and learning impacts considered in this analysis and how it impacts technology costs for other years, refer to Chapter 2 of the draft RIA (see draft RIA 2.12).

<sup>b</sup> Note that values in this table include adoption rates. Therefore, the technology costs shown reflect the average cost expected for each of the indicated tractor classes. To see the actual estimated technology costs exclusive of adoption rates, refer to Chapter 2 of the draft RIA (see draft RIA 2.12 in particular).

<sup>c</sup> Engine costs are for a heavy HD diesel engine meant for a combination tractor. The engine costs in this table are equal to the engine costs associated with the separate engine standard because both include the same set of engine technologies (see Section II.D.2.d.i).

(i) Proposed Heavy-Haul Tractor Standards

For Phase 2, the agencies propose to add a tenth subcategory to the tractor category for heavy-haul tractors. The agencies recognize the need for manufacturers to build these types of vehicles for specific applications and believe the appropriate way to prevent penalizing these vehicles is to set separate standards recognizing a heavy-haul vehicle's unique needs, such as requiring a higher horsepower engine or different transmissions. The agencies are proposing this change in Phase 2 because unlike in Phase 1 the engine,

transmission, and drivetrain technologies are included in the technology packages used to determine the stringency of the proposed tractor standards and are included as manufacturer inputs in GEM. This means that the agencies can adopt a standard reflecting individualized performance of these technologies in particular applications, in this case, heavy-haul tractors, and further, have a means of reliably assessing individualized performance of these technology at certification.

The typical tractor is designed with a Gross Combined Weight Rating (GCWR) of approximately 80,000 lbs due to the

effective weight limit on the federal highway system, except in states with preexisting higher weight limits. The agencies propose to consider tractors with a GCWR over 120,000 lbs as heavy-haul tractors. Based on comments received during the development of HD Phase 1 (76 FR 57136–57138) and because we are not proposing a sales limit for heavy-haul like we have for the vocational tractors, the agencies also believe it would be appropriate to further define the heavy-haul vehicle characteristics to differentiate these vehicles from the vehicles in the other nine tractor subcategories. The two additional requirements would include

a total gear reduction greater than or equal to 57:1 and a frame Resisting Bending Moment (RBM) greater than or equal to 2,000,000 in-lbs per rail or rail and liner combination. Heavy-haul tractors typically require the large gear reduction to provide the torque necessary to start the vehicle moving. These vehicles also typically require frame rails with extra strength to ensure the ability to haul heavy loads. We welcome comment on the proposed heavy-haul tractor specifications, including whether Gross Vehicle Weight Rating (GVWR) or Gross Axle Weight Rating (GAWR) would be a more appropriate metric to differentiate between a heavy-haul tractor and a typical tractor.

The agencies propose that heavy-haul tractors demonstrate compliance with the proposed standards using the day cab drive cycle weightings of 19 percent transient cycle, 17 percent 55 mph cycle, and 64 percent 65 mph cycle. We also propose that GEM simulates the heavy-haul tractors with a payload of 43 tons and a total tractor, trailer, and payload weight of 118,500 lbs. In

addition, we propose that the engines installed in heavy-haul tractors meet the proposed tractor engine standards included in 40 CFR 1036.108. We welcome comments on these proposed specifications.

The agencies recognize that certain technologies used to determine the stringency of the proposed Phase 2 tractor standards are less applicable to heavy-haul tractors. Heavy-haul tractors are not typically used in the same manner as long-haul tractors with extended highway driving, and therefore would experience less benefit from aerodynamics. Aerodynamic technologies are very effective at reducing the fuel consumption and GHG emissions of tractors, but only when traveling at highway speeds. At lower speeds, the aerodynamic technologies may have a detrimental impact due to the potential of added weight. The agencies therefore are not considering the use of aerodynamic technologies in the development of the proposed Phase 2 heavy-haul tractor standards.

Moreover, because aerodynamics would not play a role in the heavy-haul

standards, the agencies propose to combine all of the heavy-haul tractor cab configurations (day and sleeper) and roof heights (low, mid, and high) into a single heavy-haul tractor subcategory.<sup>167</sup> We welcome comment on this approach.

Certain powertrain and drivetrain components are also impacted during the design of a heavy-haul tractor, including the transmission, axles, and the engine. Heavy-haul tractors typically require transmissions with 13 or 18 speeds to provide the ratio spread to ensure that the tractor is able to start pulling the load from a stop. Downsized powertrains are typically not an option for heavy-haul operations because these vehicles require more torque to move the vehicle because of the heavier load. Finally, due to the loading requirements of the vehicle, it is not likely that a 6x2 axle configuration can be used in heavy-haul applications.

The agencies used the following heavy-haul tractor inputs for developing the proposed 2021, 2024, and 2027 MY standards, as shown in Table III–18 and Table III–19.

TABLE III–18—APPLICATION RATES FOR PROPOSED HEAVY-HAUL TRACTOR STANDARDS

Heavy-Haul Tractor Application Rates			
	2021MY	2024MY	2027MY
Engine	2021 MY 15L Engine with 600 HP (%)	2024 MY 15L Engine with 600 HP (%)	2027 MY 15L Engine with 600 HP (%)
<b>Aerodynamics—0%</b>			
<b>Steer Tires</b>			
Phase 1 Baseline .....	5	5	5
Level 1 .....	60	50	20
Level 2 .....	25	30	50
Level 3 .....	10	15	25
<b>Drive Tires</b>			
Phase 1 Baseline .....	5	5	5
Level 1 .....	60	50	20
Level 2 .....	25	30	50
Level 3 .....	10	15	25
<b>Transmission</b>			
AMT .....	40	50	50
Automatic .....	10	20	30
DCT .....	5	10	10
<b>Other Technologies</b>			
6x2 Axle .....	0	0	0
Low Friction Axle Lubrication .....	20	40	40
Predictive Cruise Control .....	20	40	40
Accessory Improvements .....	10	20	30
Air Conditioner Efficiency Improvements .....	10	20	30
Automatic Tire Inflation Systems .....	20	40	40

<sup>167</sup> Since aerodynamic improvements are not part of the technology package, the agencies likewise are

not proposing any bin structure for the heavy-haul tractor subcategory.

TABLE III-18—APPLICATION RATES FOR PROPOSED HEAVY-HAUL TRACTOR STANDARDS—Continued

Heavy-Haul Tractor Application Rates			
Engine	2021MY	2024MY	2027MY
	2021 MY 15L Engine with 600 HP (%)	2024 MY 15L Engine with 600 HP (%)	2027 MY 15L Engine with 600 HP (%)
Weight Reduction .....	0	0	0

TABLE III-19—GEM INPUTS FOR PROPOSED 2021, 2024 AND 2027 MY HEAVY-HAUL TRACTOR STANDARDS

Heavy-haul tractor			
Baseline	2021MY	2024MY	2027MY
Engine = 2017 MY 15L Engine with 600 HP.	Engine = 2021 MY 15L Engine with 600 HP.	Engine = 2024 MY 15L Engine with 600 HP.	Engine = 2027 MY 15L Engine with 600 HP.
Aerodynamics (CdA in m <sup>2</sup> ) = 5.00			
Steer Tires (CRR in kg/metric ton) = 7.0.	Steer Tires (CRR in kg/metric ton) = 6.2.	Steer Tires (CRR in kg/metric ton) = 6.0.	Steer Tires (CRR in kg/metric ton) = 5.8.
Drive Tires (CRR in kg/metric ton) = 7.4.	Drive Tires (CRR in kg/metric ton) = 6.6.	Drive Tires (CRR in kg/metric ton) = 6.4.	Drive Tires (CRR in kg/metric ton) = 6.2.
Transmission = 13 speed Manual Transmission, Gear Ratios = 12.29, 8.51, 6.05, 4.38, 3.20, 2.29, 1.95, 1.62, 1.38, 1.17, 1.00, 0.86, 0.73.	Transmission = 13 speed Automated Manual Transmission, Gear Ratios = 12.29, 8.51, 6.05, 4.38, 3.20, 2.29, 1.95, 1.62, 1.38, 1.17, 1.00, 0.86, 0.73.	Transmission = 13 speed Automated Manual Transmission, Gear Ratios = 12.29, 8.51, 6.05, 4.38, 3.20, 2.29, 1.95, 1.62, 1.38, 1.17, 1.00, 0.86, 0.73.	Transmission = 13 speed Automated Manual Transmission, Gear Ratios = 12.29, 8.51, 6.05, 4.38, 3.20, 2.29, 1.95, 1.62, 1.38, 1.17, 1.00, 0.86, 0.73.
Drive axle Ratio = 3.55 .....	Drive axle Ratio = 3.55 .....	Drive axle Ratio = 3.55 .....	Drive axle Ratio = 3.55.
N/A .....	6x2 Axle Weighted Effectiveness = 0%.	6x2 Axle Weighted Effectiveness = 0%.	6x2 Axle Weighted Effectiveness = 0%.
N/A .....	Low Friction Axle Lubrication = 0.1%.	Low Friction Axle Lubrication = 0.2%.	Low Friction Axle Lubrication = 0.2%.
N/A .....	AMT benefit = 1.1% .....	AMT benefit = 1.8% .....	AMT benefit = 1.8%.
N/A .....	Predictive Cruise Control = 0.4%	Predictive Cruise Control = 0.8%	Predictive Cruise Control = 0.8%.
N/A .....	Accessory Improvements = 0.1%	Accessory Improvements = 0.2%	Accessory Improvements = 0.3%.
N/A .....	Air Conditioner Efficiency Improvements = 0.1%.	Air Conditioner Efficiency Improvements = 0.1%.	Air Conditioner Efficiency Improvements = 0.2%.
N/A .....	Automatic Tire Inflation Systems = 0.2%.	Automatic Tire Inflation Systems = 0.4%.	Automatic Tire Inflation Systems = 0.4%.
N/A .....	Weight Reduction = 0 lbs .....	Weight Reduction = 0 lbs .....	Weight Reduction = 0 lbs.

The baseline 2017 MY heavy-haul tractor would emit 57 grams of CO<sub>2</sub> per ton-mile and consume 5.6 gallons of

fuel per 1,000 ton-mile. The agencies propose the heavy-haul standards shown in Table III-20. We welcome

comment on the heavy-haul tractor technology path and standards proposed by the agencies.

TABLE III-20—PROPOSED HEAVY-HAUL TRACTOR STANDARDS

	Heavy-haul tractor		
	2021 MY	2024 MY	2027 MY
Grams of CO <sub>2</sub> per Ton-Mile Standard .....	54	52	51
Gallons of Fuel per 1,000 Ton-Mile .....	5.3045	5.1081	5.010

The technology costs associated with the proposed heavy-haul tractor standards are shown below in Table III-

21. We welcome comment on the technology costs.

TABLE III-21—HEAVY-HAUL TRACTOR TECHNOLOGY INCREMENTAL COSTS IN THE 2021, 2024, AND 2027 MODEL YEAR<sup>a b</sup>  
PREFERRED ALTERNATIVE VS. THE LESS DYNAMIC BASELINE  
[2012\$ per vehicle]

	2021 MY	2024 MY	2027 MY
Engine <sup>c</sup> .....	\$314	\$904	\$1,698
Tires .....	81	78	75
Tire inflation system .....	180	330	314
Transmission .....	3,969	5,883	6,797
Axle & axle lubes .....	70	128	200
Air conditioning .....	45	82	117
Other vehicle technologies .....	174	318	302
Total .....	4,833	7,723	9,503

**Notes:**

<sup>a</sup> Costs shown are for the specified model year and are incremental to the costs of a tractor meeting the phase 1 standards. These costs include indirect costs via markups along with learning impacts. For a description of the markups and learning impacts considered in this analysis and how it impacts technology costs for other years, refer to Chapter 2 of the draft RIA (see draft RIA 2.12).

<sup>b</sup> Note that values in this table include adoption rates. Therefore, the technology costs shown reflect the average cost expected for each of the indicated tractor classes. To see the actual estimated technology costs exclusive of adoption rates, refer to Chapter 2 of the draft RIA (see draft RIA 2.12 in particular).

<sup>c</sup> Engine costs are for a heavy HD diesel engine meant for a combination tractor.

(e) Consistency of the Proposed Tractor Standards With the Agencies' Legal Authority

The proposed HD Phase 2 standards are based on adoption rates for technologies that the agencies regard, subject to consideration of public comment, as the maximum feasible for purposes of EISA Section 32902 (k) and appropriate under CAA Section 202 (a) for the reasons given in Section III.D.2(b) through (d) above; see also draft RIA Chapter 2.4. The agencies believe these technologies can be adopted at the estimated rates for these standards within the lead time provided, as discussed in draft RIA Chapter 2. The 2021 and 2024 MY standards are phase-in standards on the path to the 2027 MY standards and were developed using less aggressive application rates and therefore have lower technology package costs than the 2027 MY standards. Moreover, we project the cost of these technologies would be rapidly recovered by operators due to the associated fuel savings, as shown in the payback analysis included in Section IX below. The cost per tractor to meet the proposed 2027 MY standards is projected to range between \$10,000 and \$13,000 (much or all of this would be mitigated by the fuel savings during the first two years of ownership). The agencies note that while the projected costs are significantly greater than the costs projected for Phase 1, we still consider that cost to be reasonable, especially given the relatively short payback period. In this regard the agencies note that the estimated payback period for tractors of less than two years<sup>168</sup> is itself shorter than the estimated payback period for light duty

trucks in the 2017–2025 light duty greenhouse gas standards. That period was slightly over three years, see 77 FR 62926–62927, which EPA found to be a highly reasonable given the usual period of ownership of light trucks is typically five years.<sup>169</sup> The same is true here. Ownership of new tractors is customarily four to six years, meaning that the greenhouse gas and fuel consumption technologies pay for themselves early on and the purchaser sees overall savings in succeeding years—while still owning the vehicle.<sup>170</sup> The agencies note further that the costs for each subcategory are relatively proportionate; that is, costs of any single tractor subcategory are not disproportionately higher (or lower) than any other. Although the proposal is technology-forcing (especially with respect to aerodynamic and tire rolling resistance improvements), the agencies believe that manufacturers retain leeway to develop alternative compliance paths, increasing the likelihood of the standards' successful implementation. The agencies also regard these reductions as cost-effective, even without considering payback period. The agencies estimate the cost per metric ton of CO<sub>2</sub>eq reduction without considering fuel savings to be \$20 in 2030, and we estimate the cost per gallon of avoided fuel consumption to be about \$0.25 per gallon, which

<sup>169</sup> Auto Remarketing. Length of Ownership Returning to More Normal Levels; New Registrations Continue Slow Climb. April 1, 2013. Last accessed on February 26, 2015 at <http://www.autoremarketing.com/trends/length-ownership-returning-more-normal-levels-new-registrations-continue-slow-climb>.

<sup>170</sup> North American Council for Freight Efficiency. Barriers to Increased Adoption of Fuel Efficiency Technologies in Freight Trucking. July 2013. Page 24.

compares favorably with the levels of cost effectiveness the agencies found to be reasonable for light duty trucks.<sup>171 172</sup> See 77 FR 62922. The proposed phase-in 2021 and 2024 MY standards are less stringent and less costly than the proposed 2027 MY standards. For these reasons, and because the agencies have carefully considered lead time, EPA believes they are also reasonable under Section 202(a) of the CAA. Given that the agencies believe the proposed standards are technically feasible, are highly cost effective, and highly cost effective when accounting for the fuel savings, and have no apparent adverse potential impacts (*e.g.*, there are no projected negative impacts on safety or vehicle utility), the proposed standards appear to represent a reasonable choice under Section 202(a) of the CAA and the maximum feasible under NHTSA's EISA authority at 49 U.S.C. 32902(k)(2).

Based on the information before the agencies, we currently believe that Alternative 3 would be maximum feasible and reasonable for the tractor segment for the model years in question. The agencies believe Alternative 4 has potential to be the maximum feasible and reasonable alternative; however, based on the evidence currently before us, EPA and NHTSA have outstanding questions regarding relative risks and benefits of Alternative 4 due to the timeframe envisioned by the alternative. Alternative 3 is generally designed to achieve the levels of fuel consumption and GHG reduction that Alternative 4 would achieve, but with several years of

<sup>171</sup> See Draft RIA Chapter 7.1.4.

<sup>172</sup> If using a cost effectiveness metric that treats fuel savings as a negative cost, net costs per ton of GHG emissions reduced or per gallon of avoided fuel consumption would be negative under the proposed standards.

<sup>168</sup> See Draft RIA Chapter 7.1.3.

additional lead-time—*i.e.*, the Alternative 3 standards would end up in the same place as the Alternative 4 standards, but several years later, meaning that manufacturers could, in theory, apply new technology at a more gradual pace and with greater flexibility.

However, Alternative 4 would provide earlier GHG benefits compared to Alternative 3.

(f) Alternative Tractor Standards Considered

The agencies developed and considered other alternative levels of

stringency for the Phase 2 program. The results of the analysis of these alternatives are discussed below in Section X of the preamble. For tractors, the agencies developed the following alternatives as shown in Table III–22.

TABLE III–22—SUMMARY OF ALTERNATIVES CONSIDERED FOR THE PROPOSED RULEMAKING

Alternative 1 .....	No action alternative
Alternative 2 .....	Less Stringent than the Proposed Alternative applying off-the-shelf technologies.
Alternative 3 (Proposed Alternative) .....	Proposed Alternative fully phased-in by 2027 MY.
Alternative 4 .....	Alternative that pulls ahead the proposed 2027 MY standards to 2024 MY.
Alternative 5 .....	Alternative based on very high market adoption of advanced technologies.

When evaluating the alternatives, it is necessary to evaluate the impact of a proposed regulation in terms of CO<sub>2</sub> emission reductions, fuel consumption reductions, and technology costs. However, it is also necessary to consider other aspects, such as manufacturers' research and development resources, the impact on purchase price, and the impact on purchasers. Manufacturers are limited in their ability to develop and implement new technologies due to their human resources and budget constraints. This has a direct impact on the amount of lead time that is required to meet any new standards. From the owner/operator perspective, heavy-duty vehicles are a capital investment for firms and individuals so large increases in the upfront cost could impact buying patterns. Though the dollar value of the lifetime fuel savings will far exceed the upfront technology costs, purchasers often discount future fuel savings for a number of reasons. The purchaser often has uncertainty in the amount of fuel savings that can be expected for their specific operation due to the diversity of the heavy-duty tractor market. Although a nationwide perspective that averages out this uncertainty is appropriate for rulemaking analysis, individual operators must consider their potentially narrow operation. In addition, purchasers often put a premium on reliability (because downtime is costly in terms of towing, repair, late deliveries, and lost revenue) and may perceive any new technology as a potential risk with respect to reliability. Another factor that purchasers consider is the impact of a

new technology on the resale market, which can also be impacted by uncertainty.

The agencies selected the proposed standards over the more stringent alternatives based on considering the relevant statutory factors. In 2027, the proposed standards achieve up to a 24 percent reduction in CO<sub>2</sub> emissions and fuel consumption compared to a Phase 1 tractor at a per vehicle cost of approximately \$13,000. Alternative 4 achieves the same percent reduction in CO<sub>2</sub> emissions and fuel consumption compared to a Phase 1 tractor, but three years earlier, at a per vehicle cost of approximately \$14,000. The alternative standards are projected to result in more emission and fuel consumption reductions from the heavy-duty tractors built in model years 2021 through 2026.<sup>173</sup> We project the proposed standards to be achievable within known design cycles, and we believe these standards would allow different paths to compliance in addition to the one we outline and cost here.

The agencies solicit comment on all of these issues and again note the possibility of adopting, in a final action, standards that are more accelerated than those proposed in Alternative 3. The agencies are also assuming that both the proposed standards and Alternative 4 could be accomplished with all changes being made during manufacturers' normal product design cycles. However, we note that doing so would be more challenging for Alternative 4 and may require accelerated research and development outside of design cycles with attendant increased costs.

The agencies are especially interested in seeking detailed comments on Alternative 4. Therefore, we are including the details of the Alternative 4 analysis below. The adoption rates considered for the 2021 and 2024 MY standards developed for Alternative 4 are shown below in Table III–23 and Table III–24. The inputs to GEM used to develop the Alternative 4 CO<sub>2</sub> and fuel consumption standards are shown below in Table III–25 and Table III–26. The standards associated with Alternative 4 are shown below in Table III–27. Commenters are encouraged to address all aspects of feasibility analysis, including costs, the likelihood of developing the technology to achieve sufficient reliability within the proposed lead time, and the extent to which the market could utilize the technology.

(g) Derivation of Alternative 4 Tractor Standards

The adoption rates considered for the 2021 and 2024 MY standards developed for Alternative 4 are shown below in Table III–23 and Table III–24. The inputs to GEM used to develop the Alternative 4 CO<sub>2</sub> and fuel consumption standards are shown below in Table III–25 and Table III–26. The standards associated with Alternative 4 are shown below in Table III–27. Commenters are encouraged to address all aspects of feasibility analysis, including costs, the likelihood of developing the technology to achieve sufficient reliability within the lead time.

<sup>173</sup> See Tables III–14 and III–27.

[illegible]

TABLE III-24—ALTERNATIVE 4 ADOPTION RATES FOR 2024 MY

[illegible]

TABLE III-25—ALTERNATIVE 4 GEM INPUTS FOR 2021MY

Class 7			Class 8					
Day cab			Day cab			Sleeper cab		
Low roof	Mid roof	High roof	Low roof	Mid roof	High roof	Low roof	Mid roof	High roof
Engine								
2021MY 11L Engine 350 HP—2% reduction	2021MY 11L Engine 350 HP—2% reduction	2021MY 11L Engine 350 HP—2% reduction	2021MY 15L Engine 455 HP—2% reduction	2021MY 15L Engine 455 HP—2% reduction	2021MY 15L Engine 455 HP—2% reduction	2021MY 15L Engine 455 HP—2% reduction	2021MY 15L Engine 455 HP—2% reduction	2021MY 15L Engine 455 HP—2% reduction
Aerodynamics (CdA in m <sup>2</sup> )								
4.61	6.01	5.83	4.61	6.01	5.83	4.61	6.01	5.63
Steer Tires (CRR in kg/metric ton)								
5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9
Drive Tires (CRR in kg/metric ton)								
6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
Extended Idle Reduction Weighted Effectiveness								
N/A	N/A	N/A	N/A	N/A	N/A	2.5%	2.5%	2.5%
Transmission = 10 speed Automated Manual Transmission Gear Ratios = 12.8, 9.25, 6.76, 4.90, 3.58, 2.61, 1.89, 1.38, 1.00, 0.73								
Drive axle Ratio = 3.45								
6x2 Axle Weighted Effectiveness								
N/A	N/A	N/A	0.3%	0.3%	0.8%	0.3%	0.3%	0.8%
Low Friction Axle Lubrication = 0.1%								
Transmission benefit = 1.5%								
Predictive Cruise Control = 0.6%								
Accessory Improvements = 0.2%								
Air Conditioner Efficiency Improvements = 0.1%								
Automatic Tire Inflation Systems = 0.3%								
Weight Reduction = 0 lbs								
Direct Drive Weighted Efficiency = 1% for sleeper cabs; 0.8% for day cabs								

TABLE III-26—ALTERNATIVE 4 GEM INPUTS FOR 2024MY

Class 7			Class 8					
Day cab			Day cab			Sleeper cab		
Low roof	Mid roof	High roof	Low roof	Mid roof	High roof	Low roof	Mid roof	High roof
Engine								
2021MY 11L Engine 350 HP—4% reduction	2021MY 11L Engine 350 HP—4% reduction	2021MY 11L Engine 350 HP—4% reduction	2021MY 15L Engine 455 HP—4% reduction	2021MY 15L Engine 455 HP—4% reduction	2021MY 15L Engine 455 HP—4% reduction	2021MY 15L Engine 455 HP—4% reduction	2021MY 15L Engine 455 HP—4% reduction	2021MY 15L Engine 455 HP—4% reduction
Aerodynamics (CdA in m <sup>2</sup> )								
4.52	5.92	5.52	4.52	5.92	5.52	4.52	5.92	5.32



TABLE III-26—ALTERNATIVE 4 GEM INPUTS FOR 2024MY—Continued

Class 7			Class 8					
Day cab			Day cab			Sleeper cab		
Low roof	Mid roof	High roof	Low roof	Mid roof	High roof	Low roof	Mid roof	High roof
<b>Steer Tires (CRR in kg/metric ton)</b>								
5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6
<b>Drive Tires (CRR in kg/metric ton)</b>								
5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9
<b>Extended Idle Reduction Weighted Effectiveness</b>								
N/A	N/A	N/A	N/A	N/A	N/A	3%	3%	3%
<b>Transmission = 10 speed Automated Manual Transmission</b>								
<b>Gear Ratios = 12.8, 9.25, 6.76, 4.90, 3.58, 2.61, 1.89, 1.38, 1.00, 0.73</b>								
<b>Drive axle Ratio = 3.2</b>								
<b>6x2 Axle Weighted Effectiveness</b>								
N/A	N/A	N/A	0.5%	0.5%	1.5%	0.5%	0.5%	1.5%
<b>Low Friction Axle Lubrication = 0.2%</b>								
<b>Transmission benefit = 1.8%</b>								
<b>Predictive Cruise Control = 0.8%</b>								
<b>Accessory Improvements = 0.3%</b>								
<b>Air Conditioner Efficiency Improvements = 0.2%</b>								
<b>Automatic Tire Inflation Systems = 0.4%</b>								
<b>Weight Reduction = 0 lbs</b>								
<b>Direct Drive Weighted Efficiency = 1% for sleeper cabs; 0.8% for day cabs</b>								

TABLE III-27—TRACTOR STANDARDS ASSOCIATED WITH ALTERNATIVE 4

	Day cab		Sleeper cab
	Class 7	Class 8	Class 8
<b>2021 Model Year CO<sub>2</sub> Grams per Ton-Mile</b>			
Low Roof .....	92	74	66
Mid Roof .....	102	81	74
High Roof .....	104	82	73
<b>2021 Model Year Gallons of Fuel per 1,000 Ton-Mile</b>			
Low Roof .....	9.0373	7.2692	6.4833
Mid Roof .....	10.0196	7.9568	7.2692
High Roof .....	10.2161	8.0550	7.1709
<b>2024 Model Year CO<sub>2</sub> Grams per Ton-Mile</b>			
Low Roof .....	87	70	62
Mid Roof .....	96	76	69
High Roof .....	96	76	67
<b>2024 Model Year and Later Gallons of Fuel per 1,000 Ton-Mile</b>			
Low Roof .....	8.5462	6.8762	6.0904
Mid Roof .....	9.4303	7.4656	6.7780
High Roof .....	9.4303	7.4656	6.5815

The technology costs of achieving the reductions projected in Alternative 4 are included below in Table III–28 and Table III–29.

**TABLE III–28—CLASS 7 AND 8 TRACTOR TECHNOLOGY INCREMENTAL COSTS IN THE 2021 MODEL YEAR ALTERNATIVE 4 VS. THE LESS DYNAMIC BASELINE <sup>A B</sup>**  
(2012\$ per vehicle)

	Class 7		Class 8				
	Day cab		Day cab		Sleeper cab		
	Low/mid roof	High roof	Low/mid roof	High roof	Low roof	Mid roof	High roof
Engine <sup>c</sup> .....	\$656	\$656	\$656	\$656	\$656	\$656	\$656
Aerodynamics .....	769	632	769	632	740	740	665
Tires .....	50	11	83	18	61	61	18
Tire inflation system .....	271	271	271	271	271	271	271
Transmission .....	6,794	6,794	6,794	6,794	6,794	6,794	6,794
Axle & axle lubes .....	56	56	75	95	75	75	115
Idle reduction with APU .....	0	0	0	0	2,449	2,449	2,449
Air conditioning .....	90	90	90	90	90	90	90
Other vehicle technologies .....	261	261	261	261	261	261	261
<b>Total .....</b>	<b>8,946</b>	<b>8,769</b>	<b>8,999</b>	<b>8,816</b>	<b>11,397</b>	<b>11,397</b>	<b>11,318</b>

**Notes:**

<sup>a</sup>Costs shown are for the 2021 model year and are incremental to the costs of a tractor meeting the Phase 1 standards. These costs include indirect costs via markups along with learning impacts. For a description of the markups and learning impacts considered in this analysis and how it impacts technology costs for other years, refer to Chapter 2 of the draft RIA (see draft RIA 2.12).

<sup>b</sup>Note that values in this table include adoption rates. Therefore, the technology costs shown reflect the average cost expected for each of the indicated tractor classes. To see the actual estimated technology costs exclusive of adoption rates, refer to Chapter 2 of the draft RIA (see draft RIA 2.12 in particular).

<sup>c</sup>Engine costs are for a heavy HD diesel engine meant for a combination tractor. The engine costs in this table are equal to the engine costs associated with the separate engine standard because both include the same set of engine technologies (see Section II.D.2.e).

**TABLE III–29—CLASS 7 AND 8 TRACTOR TECHNOLOGY INCREMENTAL COSTS IN THE 2024 MODEL YEAR ALTERNATIVE 4 VS. THE LESS DYNAMIC BASELINE <sup>A B</sup>**  
(2012\$ per vehicle)

	Class 7		Class 8				
	Day cab		Day cab		Sleeper cab		
	Low/mid roof	High roof	Low/mid roof	High roof	Low roof	Mid roof	High roof
Engine <sup>c</sup> .....	\$1,885	\$1,885	\$1,885	\$1,885	\$1,885	\$1,885	\$1,885
Aerodynamics .....	805	935	805	935	773	773	997
Tires .....	50	14	83	23	63	63	23
Tire inflation system .....	330	330	330	330	330	330	330
Transmission .....	7,143	7,143	7,143	7,143	7,143	7,143	7,143
Axle & axle lubes .....	102	102	138	210	138	138	210
Idle reduction with APU .....	0	0	0	0	2,687	2,687	2,687
Air conditioning .....	123	123	123	123	123	123	123
Other vehicle technologies .....	318	318	318	318	318	318	318
<b>Total .....</b>	<b>10,757</b>	<b>10,851</b>	<b>10,826</b>	<b>10,968</b>	<b>13,461</b>	<b>13,461</b>	<b>13,717</b>

**Notes:**

<sup>a</sup>Costs shown are for the 2024 model year and are incremental to the costs of a tractor meeting the Phase 1 standards. These costs include indirect costs via markups along with learning impacts. For a description of the markups and learning impacts considered in this analysis and how it impacts technology costs for other years, refer to Chapter 2 of the draft RIA (see draft RIA 2.12).

<sup>b</sup>Note that values in this table include adoption rates. Therefore, the technology costs shown reflect the average cost expected for each of the indicated tractor classes. To see the actual estimated technology costs exclusive of adoption rates, refer to Chapter 2 of the draft RIA (see draft RIA 2.12 in particular).

<sup>c</sup>Engine costs are for a heavy HD diesel engine meant for a combination tractor. The engine costs in this table are equal to the engine costs associated with the separate engine standard because both include the same set of engine technologies (see Section II.D.2.e).

**E. Proposed Compliance Provisions for Tractors**

In HD Phase 1, the agencies developed an entirely new program to assess the CO<sub>2</sub> emissions and fuel consumption of tractors. The agencies

propose to carry over many aspects of the Phase 1 compliance approach, but are proposing to enhance several aspects of the compliance program. The sections below highlight the key areas that are the same and those that are different.

**(1) HD Phase 2 Compliance Provisions That Remain the Same**

The regulatory structure considerations for Phase 2 are discussed in more detail above in Section II. We welcome comment on all aspects of the

compliance program including where we are not proposing any changes.

(a) Application and Certification Process

For the Phase 2 proposed rule, the agencies are proposing to keep many aspects of the HD Phase 1 tractor compliance program. For example, the agencies propose to continue to use GEM (as revised for Phase 2), in coordination with additional component testing by manufacturers to determine the inputs, to determine compliance with the proposed fuel efficiency and CO<sub>2</sub> standards. Another aspect that we propose to carry over is the overall compliance approach.

In Phase 1 and as proposed in Phase 2, the general compliance process in terms of the pre-model year, during the model year, and post model year activities remain unchanged. The manufacturers would continue to be required to apply for certification through a single source, EPA, with limited sets of data and GEM results (see 40 CFR 1037.205). EPA would issue certificates upon approval based on information submitted through the VERIFY database (see 40 CFR 1037.255). In Phase 1, EPA and NHTSA jointly review and approve innovative technology requests, *i.e.* performance of any technology whose performance is not measured by the GEM simulation tool and is not in widespread use in the 2010 MY. For Phase 2, the agencies are proposing a similar process for allowing credits for off-cycle technologies that are not measured by the GEM simulation tool (see Section I.B.v. for a more detailed discussion of off-cycle requests). During the model year, the manufacturers would continue to generate certification data and conduct GEM runs on each of the vehicle configurations it builds. After the model year ends, the manufacturers would submit end of year reports to EPA that include the GEM results for all of the configurations it builds, along with credit/deficit balances if applicable (see 40 CFR 1037.250 and 1037.730). EPA and NHTSA would jointly coordinate on any enforcement action required.

(b) Compliance Requirements

The agencies are also proposing not to change the following provisions:

- Useful life of tractors (40 CFR 1037.105(e) and 1037.106(e)) although added for NHTSA in Phase 2 (40 CFR 535.5)
- Emission-related warranty requirements (40 CFR 1037.120)
- Maintenance instructions, allowable maintenance, and amending maintenance instructions (40 CFR 1037.125 and 137.220)

- Deterioration factors (40 CFR 1037.205(l) and 1037.241(c))
- Vehicle family, subfamily, and configurations (40 CFR 1037.230)

(c) Drive Cycles and Weightings

In Phase 1, the agencies adopted three drive cycles used in GEM to evaluate the fuel consumption and CO<sub>2</sub> emissions from various vehicle configurations. One of the cycles is the Transient mode of the California ARB Heavy Heavy-Duty Truck 5 Mode cycle. It is intended to broadly cover urban driving. The other two cycles represent highway driving at 55 mph and 65 mph.

The agencies propose to maintain the existing drive cycles and weighting. For sleeper cabs, the weightings would remain 5 percent of the Transient cycle, 9 percent of the 55 mph cycle, and 86 percent of the 65 mph cycle. The day cab results would be weighted based on 19 percent of the transient cycle, 17 percent of the 55 mph cycle, and 64 percent of the 65 mph cycle (see 40 CFR 1037.510(c)). One key difference in the proposed drive cycles is the addition of grade, discussed below in Section III.E.2.

The 55 mph and 65 mph drive cycles used in GEM assume constant speed operation at nominal vehicle speeds with downshifting occurring if road incline causes a predetermined drop in vehicle speed. In real-world vehicle operation, traffic conditions and other factors may cause periodic operation at lower (*e.g.* creep) or variable vehicle speeds. The agencies therefore request comment on the need to include segments of lower or variable speed operation in the nominally 55 mph and 65 mph drive cycles used in GEM and how this may or may not impact the strategies manufacturers would develop. We also request data from fleet operators or others that may track vehicle speed operation of heavy-duty tractors.

(d) Empty Weight and Payload

The total weight of the tractor-trailer combination is the sum of the tractor curb weight, the trailer curb weight, and the payload. The total weight of a vehicle is important because it in part determines the impact of technologies, such as rolling resistance, on GHG emissions and fuel consumption. In Phase 2, we are proposing to carry over the total weight of the tractor-trailer combination used in GEM for Phase 1. The agencies developed the proposed tractor curb weight inputs for Phase 2 from actual tractor weights measured in two of EPA's Phase 1 test programs. The proposed trailer curb weight inputs were derived from actual trailer weight

measurements conducted by EPA and from weight data provided to ICF International by the trailer manufacturers.<sup>174</sup>

There is a further issue of what payload weight to assign during compliance testing. In use, trucks operate at different weights at different times during their operations. The greatest freight transport efficiency (the amount of fuel required to move a ton of payload) would be achieved by operating trucks at the maximum load for which they are designed all of the time. However, this may not always be practicable. Delivery logistics may dictate partial loading. Some payloads, such as potato chips, may fill the trailer before it reaches the vehicle's maximum weight limit. Or full loads simply may not be available commercially. M.J. Bradley analyzed the Truck Inventory and Use Survey and found that approximately 9 percent of combination tractor miles travelled empty, 61 percent are "cubed-out" (the trailer is full before the weight limit is reached), and 30 percent are "weighed out" (operating weight equal 80,000 lbs which is the gross vehicle weight limit on the Federal Interstate Highway System or greater than 80,000 lbs for vehicles traveling on roads outside of the interstate system).<sup>175</sup>

The amount of payload that a tractor can carry depends on the category (or GVWR and GCWR) of the vehicle. For example, a typical Class 7 tractor can carry less payload than a Class 8 tractor. For Phase 1, the agencies used the Federal Highway Administration Truck Payload Equivalent Factors using Vehicle Inventory and Use Survey (VIUS) and Vehicle Travel Information System data to determine the payloads. FHWA's results indicated that the average payload of a Class 8 vehicle ranged from 36,247 to 40,089 lbs, depending on the average distance travelled per day.<sup>176</sup> The same study shows that Class 7 vehicles carried between 18,674 and 34,210 lbs of payload also depending on average distance travelled per day. Based on

<sup>174</sup> ICF International. Investigation of Costs for Strategies to Reduce Greenhouse Gas Emissions for Heavy-Duty On-road Vehicles. July 2010. Pages 4–15. Docket Number EPA–HQ–OAR–2010–0162–0044.

<sup>175</sup> M.J. Bradley & Associates. Setting the Stage for Regulation of Heavy-Duty Vehicle Fuel Economy and GHG Emissions: Issues and Opportunities. February 2009. Page 35. Analysis based on 1992 Truck Inventory and Use Survey data, where the survey data allowed developing the distribution of loads instead of merely the average loads.

<sup>176</sup> The U.S. Federal Highway Administration. Development of Truck Payload Equivalent Factor. Table 11. Last viewed on March 9, 2010 at [http://ops.fhwa.dot.gov/freight/freight\\_analysis/faf/faf2\\_reports/reports9/s510\\_11\\_12\\_tables.htm](http://ops.fhwa.dot.gov/freight/freight_analysis/faf/faf2_reports/reports9/s510_11_12_tables.htm).

these data, the agencies are proposing to continue to prescribe a fixed payload of 25,000 lbs for Class 7 tractors and 38,000 lbs for Class 8 tractors for certification testing. The agencies propose to continue to use a common payload for Class 8 day cabs and sleeper cabs as a predefined GEM input because

the data available do not distinguish among Class 8 tractor types. These proposed payload values represent a heavily loaded trailer, but not maximum GVWR, since as described above the majority of tractors “cube-out” rather than “weigh-out.”

Details of the proposed individual weight inputs by regulatory category, as shown in Table III–30, are included in draft RIA Chapter 3. We welcome comment or new data to support changes to the tractor weights, or refinements to the heavy-haul tractor, trailer, and payload weights.

TABLE III–30—PROPOSED COMBINATION TRACTOR WEIGHT INPUTS

Model type	Regulatory subcategory	Tractor tare weight (lbs)	Trailer weight (lbs)	Payload (lbs)	Total weight (lbs)
Class 8 .....	Sleeper Cab High Roof .....	19,000	13,500	38,000	70,500
Class 8 .....	Sleeper Cab Mid Roof .....	18,750	10,000	38,000	66,750
Class 8 .....	Sleeper Cab Low Roof .....	18,500	10,500	38,000	67,000
Class 8 .....	Day Cab High Roof .....	17,500	13,500	38,000	69,000
Class 8 .....	Day Cab Mid Roof .....	17,100	10,000	38,000	65,100
Class 8 .....	Day Cab Low Roof .....	17,000	10,500	38,000	65,500
Class 7 .....	Day Cab High Roof .....	11,500	13,500	25,000	50,000
Class 7 .....	Day Cab Mid Roof .....	11,100	10,000	25,000	46,100
Class 7 .....	Day Cab Low Roof .....	11,000	10,500	25,000	46,500
Class 8 .....	Heavy-Haul .....	19,000	13,500	86,000	118,500

#### (e) Tire Testing

In Phase 1, the manufacturers are required to input their tire rolling resistance coefficient into GEM. Also in Phase 1, the agencies adopted the provisions in ISO 28580 to determine the rolling resistance of tires. As described in 40 CFR 1037.520(c), the agencies require that at least three tires for each tire design are to be tested at least one time. Our assessment of the Phase 1 program to date indicates that these requirements reasonably balance the need for precision, repeatability, and testing burden. Therefore we propose to carry over the Phase 1 testing provisions for tire rolling resistance into Phase 2. We welcome comments regarding the proposed tire testing provisions.

In Phase 1, the agencies received comments from stakeholders highlighting a need to develop a reference lab and alignment tires for the HD sector. The agencies discussed the lab-to-lab comparison conducted in the Phase 1 EPA tire test program (76 FR 57184). The agencies reviewed the rolling resistance data from the tires that were tested at both the STL and Smithers laboratories to assess inter-laboratory and test machine variability. The agencies conducted statistical analysis of the data to gain better understanding of lab-to-lab correlation and developed an adjustment factor for data measured at each of the test labs. Based on these results, the agencies believe the lab-to-lab variation for the STL and Smithers laboratories would have very small effect on measured rolling resistance values. Based on the test data, the agencies judge for the HD

Phase 2 program to continue to use the current levels of variability, and the agencies therefore propose to allow the use of either Smithers or STL laboratories for determining the tire rolling resistance value. However, we welcome comment on the need to establish a reference machine for the HD sector and whether tire testing facilities are interested in and willing to commit to developing a reference machine.

#### (2) Key Differences in HD Phase 2 Compliance Provisions

We welcome comment on all aspects of the compliance program for which we are proposing changes.

##### (a) Aerodynamic Assessment

In Phase 1, the manufacturers conduct aerodynamic testing to establish the appropriate bin and GEM input for determining compliance with the CO<sub>2</sub> and fuel consumption standards. The agencies propose to continue this general approach in HD Phase 2, but make several enhancements to the aerodynamic assessment of tractors. As discussed below in this section, we propose some modifications to the aerodynamic test procedures—the addition of wind averaged yaw in the aerodynamic assessment, the addition of trailer skirts to the standard trailer used to determine aerodynamic performance of tractors and revisions to the aerodynamic bins.

##### (i) Aerodynamic Test Procedures

The aerodynamic drag of a vehicle is determined by the vehicle's coefficient of drag (Cd), frontal area, air density and speed. Quantifying tractor aerodynamics

as an input to the GEM presents technical challenges because of the proliferation of tractor configurations, and subtle variations in measured aerodynamic values among various test procedures. In Phase 1, Class 7 and 8 tractor aerodynamic results are developed by manufacturers using a range of techniques, including wind tunnel testing, computational fluid dynamics, and constant speed tests.

We continue to believe a broad approach allowing manufacturers to use these multiple test procedures to demonstrate aerodynamic performance of its tractor fleet is appropriate given that no single test procedure is superior in all aspects to other approaches. However, we also recognize the need for consistency and a level playing field in evaluating aerodynamic performance. To address the consistency and level playing field concerns, NHTSA and EPA adopted in Phase 1, while working with industry, an approach that identified a reference aerodynamic test method and a procedure to align results from other aerodynamic test procedures with the reference method.

The agencies adopted in Phase 1 an enhanced coastdown procedure as the reference method (see 40 CFR 1066.310) and defined a process for manufacturers to align drag results from each of their own test methods to the reference method results using Falt-aero (see 40 CFR 1037.525). Manufacturers are able to use any aerodynamic evaluation method in demonstrating a vehicle's aerodynamic performance as long as the method is aligned to the reference method. The agencies propose to continue to use this alignment method

approach to maintain the testing flexibility that manufacturers have today. However, the agencies propose to increase the rigor in determining the *Falt-aero* for Phase 2. Beginning in 2021 MY, we propose that the manufacturers would be required to determine a new *Falt-aero* for each of their tractor models for each aerodynamic test method. In Phase 1, manufacturers are required to determine their *Falt-aero* using only a high roof sleeper cab with a full aerodynamics package (see 40 CFR 1037.521(a)(2) and proposed 40 CFR 1037.525(b)(2)). In Phase 2, we propose that manufacturers would be required to determine a unique *Falt-aero* value for each major model of their high roof day cabs and high roof sleeper cabs. In Phase 2, we propose that manufacturers may carry over the *Falt-aero* value until a model changeover or based on the agencies' discretion to require up to six new *Falt-aero* determinations each year. We welcome comment on the burden associated with this proposed change to conduct up to six coastdown tests per year per manufacturer.

Based on feedback received during the development of Phase 1, we understand that there is interest from some manufacturers to change the reference method in Phase 2 from coastdown to constant speed testing. EPA has conducted an aerodynamic test program at Southwest Research Institute to evaluate both methods in terms of cost of testing, testing time, testing facility requirements, and repeatability of results. Details of the analysis and results are included in draft RIA Chapter 3.2. The results showed that the enhanced coastdown test procedures and analysis produced results with acceptable repeatability and at a lower cost than the constant speed testing. Based on the results of this testing, the agencies propose to continue to use the enhanced coastdown procedure for the reference method in Phase 2.<sup>177</sup> However, we welcome comment on the need to change the reference method for the Phase 2 final rule to constant speed testing, including comparisons of aerodynamic test results using both the coastdown and constant speed test procedures. In addition, we welcome comments on and suggested revisions to the constant speed test procedure specifications set forth in Chapter 3.2.2.2 of the draft RIA and 40 CFR 1037.533. If we determine that it is appropriate to make the change, then the aerodynamic bins in the final rule would be adjusted to take into account

the difference in absolute CdA values due to the change in method.

The agencies are also considering refinements to the computational fluid dynamics modeling method to determine the aerodynamic performance of tractors. Specifically, we are considering whether the conditions for performing the analysis require greater specificity (e.g., wind speed and direction inclusion, turbulence intensity criteria value) or if turbulence model and mesh deformation should be required, rather than "if applicable," for all CFD analysis.<sup>178</sup> The agencies welcome comment on the proposed revisions.

In Phase 1, we adopted interim provisions in 40 CFR 1037.150(k) that accounted for coastdown measurement variability by allowing a compliance demonstration based on in-use test results if the drag area was at or below the maximum drag area allowed for the bin above the bin to which the vehicle was certified. Since adoption of Phase 1, EPA has conducted in-use aerodynamic testing and found that uncertainty associated with coastdown testing is less than anticipated.<sup>179</sup> In addition, we are proposing additional enhancements in the Phase 2 coastdown procedures to continue to reduce the variability of coastdown results, including the impact of environmental conditions. Therefore, we are proposing to sunset the provision in 40 CFR 1037.150(k) at the end of the Phase 1 program (after the 2020 model year). We request comment on whether or not we should factor in a test variability compliance margin into the aerodynamic test procedure, and therefore request data on aerodynamic test variability.

#### (ii) Wind Averaged Drag

In Phase 1, EPA and NHTSA recognized that wind conditions, most notably wind direction, have a greater impact on real world CO<sub>2</sub> emissions and fuel consumption of heavy-duty trucks than of light-duty vehicles.<sup>180</sup> As noted in the NAS report, the wind average drag coefficient is about 15 percent higher than the zero degree coefficient of drag.<sup>181</sup> In addition, the agencies received comments in Phase 1 that supported the use of wind averaged drag results for the aerodynamic determination. The agencies considered adopting the use of a wind averaged

drag coefficient in the Phase 1 regulatory program, but ultimately decided to finalize drag values which represent zero yaw (i.e., representing wind from directly in front of the vehicle, not from the side) instead. We took this approach recognizing that the reference method is coastdown testing and it is not capable of determining wind averaged yaw.<sup>182</sup> Wind tunnels and CFD are currently the only tools to accurately assess the influence of wind speed and direction on a truck's aerodynamic performance. The agencies recognized, as NAS did, that the results of using the zero yaw approach may result in fuel consumption predictions that are offset slightly from real world performance levels, not unlike the offset we see today between fuel economy test results in the CAFE program and actual fuel economy performance observed in-use.

As the tractor manufacturers continue to refine the aerodynamics of tractors, we believe that continuing the zero yaw approach into Phase 2 could potentially impact the overall technology effectiveness or change the kinds of technology decisions made by the tractor manufacturers in developing equipment to meet our proposed HD Phase 2 standards. Therefore, we are proposing aerodynamic test procedures that take into account the wind averaged drag performance of tractors. The agencies propose to account for this change in aerodynamic test procedure by appropriately adjusting the aerodynamic bins to reflect a wind averaged drag result instead of a zero yaw result.

The agencies propose that beginning in 2021 MY, the manufacturers would be required to adjust their CdA values to represent a zero yaw value from coastdown and add the CdA impact of the wind averaged drag. The impact of wind averaged drag relative to a zero yaw condition can only be measured in a wind tunnel or with CFD. We welcome data evaluating the consistency of wind averaged drag measurements between wind tunnel, CFD, and other potential methods such as constant speed or coastdown. The agencies propose that manufacturers would use the following equation to make the necessary adjustments to a coastdown result to obtain the CdA<sub>wad</sub> value:

$$CdA_{wad} = CdA_{zero, coastdown} + (CdA_{wad, wind\ tunnel} - CdA_{zero, wind\ tunnel}) * F_{alt-aero}$$

If the manufacturer has a wind averaged CdA value from either a wind tunnel or CFD, then we propose they

<sup>177</sup> Southwest Research Institute. "Heavy Duty Class 8 Truck Coastdown and Constant Speed Testing." April 2015.

<sup>178</sup> 40 CFR 1037.531 "Computational fluid dynamics (CFD)".

<sup>179</sup> Southwest Research Institute. "Heavy Duty Class 8 Truck Coastdown and Constant Speed Testing." April 2015.

<sup>180</sup> See 2010 NAS Report, page 95

<sup>181</sup> See 2010 NAS Report, Finding 2–4 on page 39. Also see 2014 NAS Report, Recommendation 3.5.

<sup>182</sup> See 2010 NAS Report. Page 95.

would use the following equation to obtain the CdA<sub>wad</sub> value:

$$CdA_{wad} = CdA_{wad, wind\ tunnel\ or\ CFD} * F_{alt-aero}$$

We welcome comment on whether the wind averaged drag should be determined using a full yaw sweep as specified in Appendix A of the Society of Automotive Engineers (SAE) recommended practice number J1252 “SAE Wind Tunnel Test Procedure for Trucks and Buses” (e.g., zero degree yaw and a six other yaw angles at increments of 3 degrees or greater) or a subset of specific angles as currently allowed in the Phase 1 regulations.<sup>183</sup>

To reduce the testing burden the agencies propose that manufacturers have the option of determining the offset between zero yaw and wind averaged yaw either through testing or by using the EPA-defined default offset. Details regarding the determination of the offset are included in the draft RIA Chapter 3.2. We propose the manufacturers would use the following equation if they had a zero yaw coastdown value and choose not to conduct wind averaged measurements.

$$CdA_{wad} = CdA_{zero, coastdown} + 0.80$$

In addition, we propose the manufacturers would use the following equation if they had a zero yaw wind tunnel or CFD value and choose not to conduct wind averaged measurements.

$$CdA_{wad} = (CdA_{zero, wind\ tunnel\ or\ CFD} * F_{alt-aero}) + 0.80$$

We welcome comments on all aspects of the proposed wind averaged drag provisions.

### (iii) Standard Trailer Definition

Similar to the approach the agencies adopted in Phase 1, NHTSA and EPA are proposing provisions such that the tractor performance in GEM is judged assuming the tractor is pulling a standardized trailer.<sup>184</sup> The agencies believe that an assessment of the tractor fuel consumption and CO<sub>2</sub> emissions should be conducted using a tractor-trailer combination, as tractors are invariably used in combination with trailers and this is their essential commercial purpose. Trailers, of course, also influence the extent of carbon emissions from the tractor (and vice-versa). We believe that using a standardized trailer best reflects the impact of the overall weight of the tractor-trailer and the aerodynamic technologies in actual use, and consequent real-world performance, where tractors are designed and used with a trailer. EPA research confirms

what one would intuit: tractor-trailer pairings are almost always optimized. EPA conducted an evaluation of over 4,000 tractor-trailer combinations using live traffic cameras in 2010.<sup>185</sup> The results showed that approximately 95 percent of the tractors were matched with the standard trailer specified (high roof tractor with box trailer, mid roof tractor with tanker trailer, and low roof with flatbed trailer). Therefore, the agencies propose that Phase 2 GEM continue to use a predefined typical trailer defined in Phase 1 in assessing overall performance for test purposes. As such, the high roof tractors would be paired with a standard box trailer; the mid roof tractors would be paired with a tanker trailer; and the low roof tractors would be paired with a flatbed trailer.

However, the agencies are proposing to change the definition of the standard box trailer used by tractor manufacturers to determine the aerodynamic performance of high roof tractors in Phase 2. We believe this is necessary to reflect the aerodynamic improvements experienced by the trailer fleet over the last several years due to influences from the California Air Resources Board mandate<sup>186</sup> and EPA's SmartWay Transport Partnership. The standard box trailer used in Phase 1 to assess the aerodynamic performance of high roof tractors is a 53 foot box trailer without any aerodynamic devices. In the development of Phase 2, the agencies evaluated the increase in adoption rates of trailer side skirts and boat tails in the market over the last several years and have seen a marked increase. We estimate that approximately 50 percent of the new trailers sold in 2018 will have trailer side skirts.<sup>187 188</sup> As the agencies look towards the proposed standards in the 2021 and beyond timeframe, we believe that it is appropriate to update the standard box trailer definition. In 2021–2027, we believe the trailer fleet will be a mix of trailers with no aerodynamics, trailers with skirts, and trailers with advanced aero; with the advanced aero being a very limited subset of the new trailers sold each year. Consequently, overall, we believe a trailer with a skirt

will be the most representative of the trailer fleet for the duration of the regulation timeframe, and plausibly beyond. Therefore, we are proposing that the standard box trailer in Phase 2—the trailer assumed during the certification process to be paired with a high roof tractor—be updated to include a trailer skirt starting in 2021 model year. Even though the agencies are proposing new box trailer standards beginning in 2018 MY, we are not proposing to update the standard trailer in the tractor certification process until 2021 MY, to align with the new tractor standards. If we were to revise the standardized trailer definition for Phase 1, then we would need to revise the Phase 1 tractor standards. The details of the trailer skirt definition are included in 40 CFR 1037.501(g)(1).

EPA has conducted extensive aerodynamic testing to quantify the impact on the coefficient of drag of a high roof tractor due to the addition of a trailer skirt. Details of the test program and the results can be found in the draft RIA Chapter 3.2. The results of the test program indicate that on average, the impact of a trailer skirt matching the definition of the skirt specified in 40 CFR 1037.501(g)(1) is approximately 8 percent improvement in coefficient of drag area. This off-set was used during the development of the Phase 2 aerodynamic bins.

We seek comment on our proposed HD Phase 2 standard trailer configuration. We also welcome comments on suggestions on alternative ways to define the standard trailer, such as developing a certified computer aided drawing (CAD) model.

### (iv) Aerodynamic Bins

The agencies are proposing to continue the approach where the manufacturer would determine a tractor's aerodynamic drag force through testing, determine the appropriate predefined aerodynamic bin, and then input the predefined CdA value for that bin into the GEM. The agencies proposed Phase 2 aerodynamic bins reflect three changes to the Phase 1 bins—the incorporation of wind averaged drag, the addition of trailer skirts to the standard box trailer used to determine the aerodynamic performance of high roof tractors, and the addition of bins to reflect the continued improvement of tractor aerodynamics in the future. Because of each of these changes, the aerodynamic bins proposed for Phase 2 are not directly comparable to the Phase 1 bins.

HD Phase 1 included five aerodynamic bins to cover the spectrum of aerodynamic performance of high

<sup>183</sup> Proposed 40 CFR 1037.525(d)(2); “Yaw Sweep Corrections”.

<sup>184</sup> See 40 CFR 1037.501(g).

<sup>185</sup> See Memo to Docket, Amy Kopin, “Truck and Trailer Roof Match Analysis,” August 2010.

<sup>186</sup> California Air Resources Board, Tractor-Trailer Greenhouse Gas regulation. Last viewed on September 4, 2014 at <http://www.arb.ca.gov/msprog/truckstop/trailers/trailers.htm>.

<sup>187</sup> Ben Sharpe (ICCT) and Mike Roeth (North American Council for Freight Efficiency), “Costs and Adoption Rates of Fuel-Saving Technologies for Trailer in the North American On-Road Freight Sector”, Feb 2014.

<sup>188</sup> Frost & Sullivan, “Strategic Analysis of North American Semi-trailer Advanced Technology Market”, Feb 2013.

roof tractors. Since the development of the Phase 1 rules, the manufacturers have continued to invest in aerodynamic improvements for tractors. This continued evolution of aerodynamic performance, both in production and in the research stage as part of the SuperTruck program, has consequently led the agencies to propose two additional aerodynamic technology bins (Bins VI and VII) for high roof tractors. These two new bins would further segment the Phase 1 aerodynamic Bin V to recognize the difference in advanced aerodynamic technologies and designs.

In both HD Phase 1 and as proposed by the agencies in Phase 2, aerodynamic Bin I through Bin V represent tractors sharing similar levels of technology. The first high roof aerodynamic category, Bin I, is designed to represent tractor bodies which prioritize appearance or special duty capabilities over aerodynamics. These Bin I tractors incorporate few, if any, aerodynamic features and may have several features that detract from aerodynamics, such as bug deflectors, custom sunshades, B-pillar exhaust stacks, and others. The second high roof aerodynamics category is Bin II which roughly represents the aerodynamic performance of the average new tractor sold in 2010. The agencies developed this bin to incorporate conventional tractors which capitalize on a generally aerodynamic shape and avoid classic features which increase drag. High roof tractors within Bin III build on the basic aerodynamics of Bin II tractors with added components to reduce drag in the most significant areas on the tractor, such as integral roof fairings, side extending gap reducers, fuel tank fairings, and streamlined grill/hood/mirrors/bumpers, similar to 2013 model year SmartWay tractors. The Bin IV aerodynamic category for high roof tractors builds upon the Bin III tractor body with additional aerodynamic treatments such as underbody airflow

treatment, down exhaust, and lowered ride height, among other technologies. HD Phase 1 Bin V tractors incorporate advanced technologies which are currently in the prototype stage of development, such as advanced gap reduction, rearview cameras to replace mirrors, wheel system streamlining, and advanced body designs. For HD Phase 2, the agencies propose to segment the aerodynamic performance of these advanced technologies into Bins V through VII.

In Phase 1, the agencies adopted only two aerodynamic bins for low and mid roof tractors. The agencies limited the number of bins to reflect the actual range of aerodynamic technologies effective in low and mid roof tractor applications. High roof tractors are consistently paired with box trailer designs, and therefore manufacturers can design the tractor aerodynamics as a tractor-trailer unit and target specific areas like the gap between the tractor and trailer. In addition, the high roof tractors tend to spend more time at high speed operation which increases the impact of aerodynamics on fuel consumption and GHG emissions. On the other hand, low and mid roof tractors are designed to pull variable trailer loads and shapes. They may pull trailers such as flat bed, low boy, tankers, or bulk carriers. The loads on flat bed trailers can range from rectangular cartons with tarps, to a single roll of steel, to a front loader. Due to these variables, manufacturers do not design unique low and mid roof tractor aerodynamics but instead use derivatives from their high roof tractor designs. The aerodynamic improvements to the bumper, hood, windshield, mirrors, and doors are developed for the high roof tractor application and then carried over into the low and mid roof applications. As mentioned above, the types of designs that would move high roof tractors from a Bin III to Bins IV through VII include

features such as gap reducers and integral roof fairings which would not be appropriate on low and mid roof tractors.

As Phase 2 looks to further improve the aerodynamics for high roof sleeper cabs, we believe it is also appropriate to expand the number of bins for low and mid roof tractors too. For Phase 2, the agencies are proposing to differentiate the aerodynamic performance for low and mid roof applications with four bins, instead of two, in response to feedback received from manufacturers of low and mid roof tractors related to the limited opportunity to incorporate aerodynamic technologies in their compliance plan. We propose that low and mid roof tractors may determine the aerodynamic bin based on the aerodynamic bin of an equivalent high roof tractor, as shown below in Table III-31.

TABLE III-31—PROPOSED PHASE 2 REVISIONS TO 40 CFR 1037.520(B)(3)

High roof bin	Low and mid roof bin
Bin I	Bin I
Bin II	Bin I
Bin III	Bin II
Bin IV	Bin II
Bin V	Bin III
Bin VI	Bin III
Bin VII	Bin IV

The agencies developed new high roof tractor aerodynamic bins for Phase 2 that reflect the change from zero yaw to wind averaged drag, the more aerodynamic reference trailer, and the addition of two bins. Details regarding the derivation of the proposed high roof bins are included in Draft RIA Chapter 3.2.8. The proposed high roof tractor bins are defined in Table III-32. The proposed revisions to the low and mid roof tractor bins reflect the addition of two new aerodynamic bins and are listed in Table III-33.

TABLE III-32—PROPOSED PHASE 2 AERODYNAMIC INPUT DEFINITIONS TO GEM FOR HIGH ROOF TRACTORS

	Class 7	Class 8	
	Day cab	Day cab	Sleeper cab
	High roof	High roof	High roof
<b>Aerodynamic Test Results (<math>CdA_{\text{wad}}</math> in <math>m^2</math>)</b>			
Bin I .....	≥7.5	≥7.5	≥7.3
Bin II .....	6.8–7.4	6.8–7.4	6.6–7.2
Bin III .....	6.2–6.7	6.2–6.7	6.0–6.5
Bin IV .....	5.6–6.1	5.6–6.1	5.4–5.9
Bin V .....	5.1–5.5	5.1–5.5	4.9–5.3
Bin VI .....	4.7–5.0	4.7–5.0	4.5–4.8
Bin VII .....	≤4.6	≤4.6	≤4.4

TABLE III-32—PROPOSED PHASE 2 AERODYNAMIC INPUT DEFINITIONS TO GEM FOR HIGH ROOF TRACTORS—Continued

	Class 7	Class 8	
	Day cab	Day cab	Sleeper cab
	High roof	High roof	High roof
<b>Aerodynamic Input to GEM (<math>CdA_{wad}</math> in <math>m^2</math>)</b>			
Bin I .....	7.6	7.6	7.4
Bin II .....	7.1	7.1	6.9
Bin III .....	6.5	6.5	6.3
Bin IV .....	5.8	5.8	5.6
Bin V .....	5.3	5.3	5.1
Bin VI .....	4.9	4.9	4.7
Bin VII .....	4.5	4.5	4.3

TABLE III-33—PROPOSED PHASE 2 AERODYNAMIC INPUT DEFINITIONS TO GEM FOR LOW AND MID ROOF TRACTORS

	Class 7		Class 8			
	Day cab		Day cab		Sleeper cab	
	Low roof	Mid roof	Low roof	Mid roof	Low roof	Mid roof
<b>Aerodynamic Test Results (<math>CdA</math> in <math>m^2</math>)</b>						
Bin I .....	≥5.1	≥6.5	≥5.1	≥6.5	≥5.1	≥6.5
Bin II .....	4.6–5.0	6.0–6.4	4.6–5.0	6.0–6.4	4.6–5.0	6.0–6.4
Bin III .....	4.2–4.5	5.6–5.9	4.2–4.5	5.6–5.9	4.2–4.5	5.6–5.9
Bin IV .....	≤4.1	≤5.5	≤4.1	≤5.5	≤4.1	≤5.5
<b>Aerodynamic Input to GEM (<math>CdA</math> in <math>m^2</math>)</b>						
Bin I .....	5.3	6.7	5.3	6.7	5.3	6.7
Bin II .....	4.8	6.2	4.8	6.2	4.8	6.2
Bin III .....	4.3	5.7	4.3	5.7	4.3	5.7
Bin IV .....	4.0	5.4	4.0	5.4	4.0	5.4

## (b) Road Grade in the Drive Cycles

Road grade can have a significant impact on the overall fuel economy of a heavy-duty vehicle. Table III-34 shows the results from a real world evaluation of heavy-duty tractor-trailers conducted by Oak Ridge National Lab.<sup>189</sup> The study found that the impact of a mild upslope of one to four percent led to a decrease in average fuel economy from 7.33 mpg to 4.35 mpg. These results are as expected because

vehicles consume more fuel while driving on an upslope than driving on a flat road because the vehicle needs to exert additional power to overcome the grade resistance force.<sup>190</sup> The amount of extra fuel increases with increases in road gradient. On downgrades, vehicles consume less fuel than on a flat road. However, as shown in the fuel consumption results in Table III-34, the amount of increase in fuel consumption on an upslope is greater than the amount of decrease in fuel consumption

on a downslope which leads to a net increase in fuel consumption. As an example, the data shows that a vehicle would use 0.3 gallons per mile more fuel in a severe upslope than on flat terrain, but only save 0.1 gallons of fuel per mile on a severe downslope. In another study, Southwest Research Institute modeling found that the addition of road grade to a drive cycle has an 8 to 10 percent negative impact on fuel economy.<sup>191</sup>

TABLE III-34—FUEL CONSUMPTION RELATIVE TO ROAD GRADE

Type of terrain	Average fuel economy (miles per gallon)	Average fuel consumption (gallons per mile)
Severe upslope (>4%) .....	2.90	0.34
Mild upslope (1% to 4%) .....	4.35	0.23
Flat terrain (1% to 1%) .....	7.33	0.14
Mild downslope (–4% to –1%) .....	15.11	0.07
Severe downslope (<–4%) .....	23.50	0.04

<sup>189</sup> Oakridge National Laboratory. Transportation Energy Book, Edition 33. Table 5.10 Effect of Terrain on Class 8 Truck Fuel Economy. 2014. Last

accessed on September 19, 2014 at <http://cta.ornl.gov/data/Chapter5.shtml>.

<sup>190</sup> Ibid.

<sup>191</sup> Reinhart, T. (2015). *Commercial Medium- and Heavy-Duty (MD/HD) Truck Fuel Efficiency Technology Study—Report #2*. Washington, DC: National Highway Traffic Safety Administration.



In Phase 1, the agencies did not include road grade. However, we believe it is important to propose including road grade in Phase 2 to properly assess the value of technologies, such as downspeeding and the integration of the engine and transmission, which were not technologies included in the technology basis for Phase 1 and are not directly assessed by GEM in its Phase 1 iteration. The addition of road grade to the drive cycles would be consistent with the NAS recommendation in the 2014 Phase 2 First Report.<sup>192</sup>

The U.S. Department of Energy and EPA have partnered to support a project aimed at evaluating, refining and/or developing the appropriate road grade profiles for the 55 mph and 65 mph highway cruise duty cycles that would be used in the certification of heavy-duty vehicles to the Phase 2 GHG emission and fuel efficiency standards. The National Renewable Energy Laboratory (NREL) was contracted to do this work and has since developed two pairs of candidate, activity-weighted road grade profiles representative of U.S. limited-access highways. To this end, NREL used high-accuracy road grade data and county-specific vehicle miles traveled data. One pair of the

profiles is representative of the nation's limited-access highways with 55 and 60 mph speed limits, and another is representative of such highways with speed limits of 65 to 75 mph. The profiles are distance-based and cover a maximum distance of 12 and 15 miles, respectively. A report documenting this NREL work is in the public docket for these proposed rules, and comments are requested on the recommendations therein.<sup>193</sup> In addition to NREL work, the agencies have independently developed yet another candidate road grade profile for use in the 55 mph and 65 mph highway cruise duty cycles. While based on the same road grade database generated by NREL for U.S. restricted-access highways, its design is predicated on a different approach. The development of this profile is documented in the memorandum to the docket.<sup>194</sup> The agencies have evaluated all of the candidate road grade profiles and have prepared possible alternative tractor standards based on these profiles. The agencies request comment on this analysis, which is available in a memorandum to the docket.<sup>195</sup>

For the proposal, the agencies developed an interim road grade profile for development of the proposed standards. The agencies are proposing

the inclusion of an interim road grade profile, as shown below in Figure III-2, in both the 55 mph and 65 mph cycles. The grade profile was developed by Southwest Research Institute on a 12.5 mile stretch of restricted-access highway during on-road tests conducted for EPA's validation of the Phase 2 version of GEM.<sup>196</sup> The minimum grade in the interim cycle is -2.1 percent and the maximum grade is 2.4 percent. The cycle spends 30 percent of the distance in grades of +/- 0.5 percent. Overall, the cycle spends approximately 50 percent of the time in relatively flat terrain with road gradients of less than 1 percent.

The agencies believe the interim cycle has sufficient representativeness based on a comparison to data from the Department of Transportation used in the development of the light-duty Federal Test Procedure cycle (FTP), which found approximately 55 percent of the vehicle miles traveled were on road gradients of less than 1 percent.<sup>197</sup> Consequently, we expect that road grade profiles developed by NREL and by the agencies will not differ significantly from the interim profile proposed here. The agencies request data from fleet operators or others that have real world grade profile data.

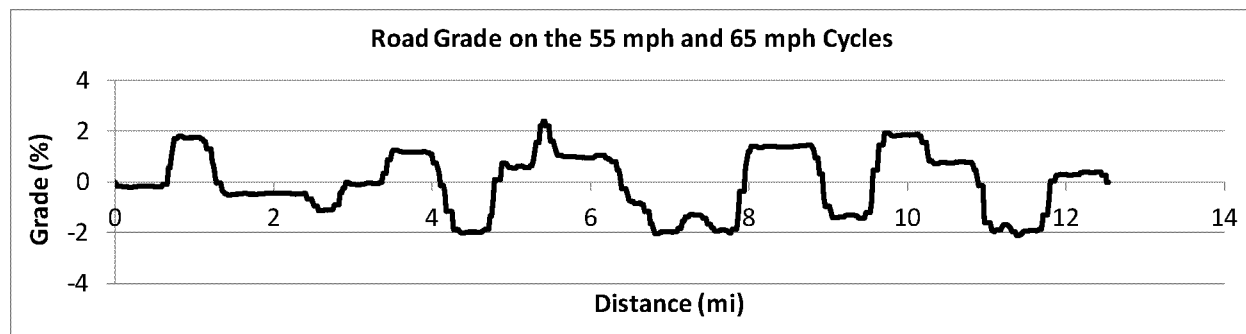


Figure III-2 Proposed Road Grade Profile for 55 mph and 65 mph Drive Cycles

### (c) Weight Reduction

In Phase 1, the agencies adopted regulations that provided manufacturers with the ability to use GEM to measure emission reduction and reductions in fuel consumption resulting from use of high strength steel and aluminum components for weight reduction, and to do so without the burden of entering the curb weight of every tractor

produced. We treated such weight reduction in two ways in Phase 1 to account for the fact that combination tractor-trailers weigh-out approximately one-third of the time and cube-out approximately two-thirds of the time. Therefore, one-third of the weight reduction is added payload in the denominator while two-thirds of the weight reduction is subtracted from the

overall weight of the vehicle in GEM. See 76 FR 57153. The agencies also allowed manufacturers to petition for off-cycle credits for components not measured in GEM.

NHTSA and EPA propose carrying the Phase 1 treatment of weight reduction into Phase 2. That is, these types of weight reduction, although not part of the agencies' technology packages for

<sup>192</sup> National Academy of Science. "Reducing the Fuel Consumption and GHG Emissions of Medium- and Heavy-Duty Vehicles, Phase Two, First Report." 2014. Recommendation S.3 (3.6).

<sup>193</sup> See NREL Report "EPA Road Grade profiles" for DOE-EPA Interagency Agreement to Refine Drive Cycles for GHG Certification of Medium- and

Heavy-Duty Vehicles, IA Number DW-89-92402501.

<sup>194</sup> Memorandum dated April 2015 on Possible Tractor, Trailer, and Vocational Vehicle Standards Derived from Alternative Road Grade Profiles.

<sup>195</sup> *Ibid*.

<sup>196</sup> Southwest Research Institute. "GEM Validation", Technical Research Workshop

supporting EPA and NHTSA Phase 2 Standards for MD/HD Greenhouse Gas and Fuel Efficiency—December 10 and 11, 2014. Can be accessed at <http://www.epa.gov/otaq/climate/regs-heavy-duty.htm>.

<sup>197</sup> U.S. EPA. FTP Preliminary Report. May 14, 1993. Table 5-1, page 76. EPA-420-R-93-007.

the proposed (or alternative) standards, can still be recognized in GEM up to a point. In addition, the agencies propose to add additional thermoplastic components to the weight reduction table, as shown below in Table III–35. The thermoplastic component weight reduction values were developed in

coordination with SABIC, a thermoplastic component supplier. Also, in Phase 2, we are proposing to recognize the potential weight reduction opportunities in the powertrain and drivetrain systems as part of the vehicle inputs into GEM. Therefore, we believe it is appropriate to also recognize the

weight reduction associated with both smaller engines and 6x2 axles.<sup>198</sup> We propose including the values listed in Table III–36 and make them available upon promulgation of the final Phase 2 rules (*i.e.*, available even under Phase 1). We welcome comments on all aspects of weight reduction.

TABLE III–35—PROPOSED PHASE 2 WEIGHT REDUCTION TECHNOLOGIES FOR TRACTORS

Weight reduction technology		Weight reduction (lb per tire/wheel)		
Single Wide Drive Tire with .....	Steel Wheel .....			84
	Aluminum Wheel .....			139
	Light Weight Aluminum Wheel .....			147
Steer Tire or Dual Wide Drive Tire with .....	High Strength Steel Wheel .....			8
	Aluminum Wheel .....			21
	Light Weight Aluminum Wheel .....			30

Weight reduction technologies	Aluminum weight reduction (lb.)	High strength steel weight reduction (lb.)	Thermoplastic weight reduction (lb.)
Door (per door) .....	20	6	.....
Roof (per vehicle) .....	60	18	.....
Cab rear wall (per vehicle) .....	49	16	.....
Cab floor (per vehicle) .....	56	18	.....
Hood (per vehicle) .....	55	17	.....
Hood Support Structure (per vehicle) .....	15	3	.....
Hood and Front Fender (per vehicle) .....	.....	.....	65
Day Cab Roof Fairing (per vehicle) .....	.....	.....	18
Sleeper Cab Roof Fairing (per vehicle) .....	75	20	40
Aerodynamic Side Extender (per vehicle) .....	.....	.....	10
Fairing Support Structure (per vehicle) .....	35	6	.....
Instrument Panel Support Structure (per vehicle) .....	5	1	.....
Brake Drums—Drive (per 4) .....	140	11	.....
Brake Drums—Non Drive (per 2) .....	60	8	.....
Frame Rails (per vehicle) .....	440	87	.....
Crossmember—Cab (per vehicle) .....	15	5	.....
Crossmember—Suspension (per vehicle) .....	25	6	.....
Crossmember—Non Suspension (per 3) .....	15	5	.....
Fifth Wheel (per vehicle) .....	100	25	.....
Radiator Support (per vehicle) .....	20	6	.....
Fuel Tank Support Structure (per vehicle) .....	40	12	.....
Steps (per vehicle) .....	35	6	.....
Bumper (per vehicle) .....	33	10	.....
Shackles (per vehicle) .....	10	3	.....
Front Axle (per vehicle) .....	60	15	.....
Suspension Brackets, Hangers (per vehicle) .....	100	30	.....
Transmission Case (per vehicle) .....	50	12	.....
Clutch Housing (per vehicle) .....	40	10	.....
Drive Axle Hubs (per 4) .....	80	20	.....
Non Drive Front Hubs (per 2) .....	40	5	.....
Driveshaft (per vehicle) .....	20	5	.....
Transmission/Clutch Shift Levers (per vehicle) .....	20	4	.....

TABLE III–36—PROPOSED PHASE 2 WEIGHT REDUCTION VALUES FOR OTHER COMPONENTS

Weight reduction technology	Weight reduction (lb)
6x2 axle configuration in tractors .....	300
4x2 axle configuration in Class 8 tractors .....	300

TABLE III–36—PROPOSED PHASE 2 WEIGHT REDUCTION VALUES FOR OTHER COMPONENTS—Continued

Weight reduction technology	Weight reduction (lb)
Tractor engine with displacement less than 14.0L .....	199300

TABLE III–36—PROPOSED PHASE 2 WEIGHT REDUCTION VALUES FOR OTHER COMPONENTS—Continued

Weight reduction technology	Weight reduction (lb)
CI Liquefied Natural Gas tractor .....	200 201 – 600
SI Compressed Natural Gas tractor .....	– 525

<sup>198</sup> North American Council for Freight Efficiency. “Confidence Findings on the Potential of 6x2 Axles.” 2014. Page 16.

TABLE III-36—PROPOSED PHASE 2 WEIGHT REDUCTION VALUES FOR OTHER COMPONENTS—Continued

Weight reduction technology	Weight reduction (lb)
CI Compressed Natural Gas tractor .....	–900

#### (d) GEM Inputs

The agencies propose to continue to require the Phase 1 GEM inputs for tractors in Phase 2. These inputs include the following:

- Steer tire rolling resistance,
- Drive tire rolling resistance,
- Coefficient of Drag Area,
- Idle Reduction, and
- Vehicle Speed Limiter.

As discussed above in Section II.C and III.D, there are several additional inputs that are proposed for Phase 2. The new GEM inputs proposed for Phase 2 include the following:

- Engine information including manufacturer, model, combustion type, fuel type, family name, and calibration identification

- Engine fuel map,
- Engine full-load torque curve,
- Engine motoring curve,
- Transmission information including manufacturer and model
- Transmission type,
- Transmission gear ratios,
- Drive axle ratio,
- Loaded tire radius for drive tires,

and

- Other technology inputs.

The agencies welcome comments on the inclusion of these proposed technologies into GEM in Phase 2.

#### (e) Vehicle Speed Limiters and Extended Idle Provisions

The agencies received comments during the development of Phase 1 that the Clean Air Act provisions to prevent tampering (CAA section 203(a)(3)(A); 42 U.S.C. 7522(a)(3)(A)) of vehicle speed limiters and extended idle reduction technologies would prohibit their use for demonstrating compliance with the Phase 1 standards. In Phase 1, the

agencies adopted provisions to allow for discounted credits for idle reduction technologies that allowed for override conditions and expiring engine shutdown systems (see 40 CFR 1037.660). Similarly, the agencies adopted provisions to allow for “soft top” speeds and expiring vehicle speed limiters, and we are not proposing to change those provisions (see 40 CFR 1037.640). However, as we develop Phase 2, we understand that the concerns still exist that the ability for a tractor manufacturer to reflect the use of a VSL in its compliance determination may be constrained by the demand for flexibility in the use of VSLs by the customers. . The agencies welcome suggestions on how to close the gap between the provisions that would be acceptable to the industry while maintaining our need to ensure that modifications do not violate 42 U.S.C. 7522(a)(3)(A). We request comment on potential approaches which would enable feedback mechanism between the vehicle owner/fleet that would provide the agencies the assurance that the benefits of the VSLs will be seen in use but which also provides the vehicle owner/fleet the flexibility they many need during in-use operation. More generally in our discussions with several trucking fleets and with the American Trucking Associations an interest was expressed by the fleets if there was a means by which they could participate in the emissions credit transactions which is currently limited to the directly regulated truck manufacturers. VSLs and extended idle systems were two example technologies that fleets and individual owners can order for a new build truck, and that from the fleet’s perspective the truck manufacturers receive emission credits for. The agencies do not have a specific proposal or a position on the request from the American Trucking Association and its members, but we request comment on whether or not it is appropriate to allow owners to participate in the overall compliance process for the directly regulated parties, if such a thing is allowed under the two agencies’ respective statutes, and what regulatory provisions would be needed to incorporate such an approach.

#### (f) Emission Control Labels

The agencies consider it crucial that authorized compliance inspectors are able to identify whether a vehicle is certified, and if so whether it is in its certified condition. To facilitate this identification in Phase 1, EPA adopted labeling provisions for tractors that included several items. The Phase 1

tractor label must include the manufacturer, vehicle identifier such as the Vehicle Identification Number (VIN), vehicle family, regulatory subcategory, date of manufacture, compliance statements, and emission control system identifiers (see 40 CFR 1037.135). In Phase 1, the emission control system identifiers are limited to vehicle speed limiters, idle reduction technology, tire rolling resistance, some aerodynamic components, and other innovative and advanced technologies.

The number of proposed emission control systems for greenhouse gas emissions in Phase 2 has increased significantly. For example, the engine, transmission, drive axle ratio, accessories, tire radius, wind averaged drag, predictive cruise control, and automatic tire inflation system are controls which can be evaluated on-cycle in Phase 2 (*i.e.* these technologies’ performance can now be input to GEM), but could not be in Phase 1. Due to the complexity in determining greenhouse gas emissions as proposed in Phase 2, the agencies do not believe that we can unambiguously determine whether or not a vehicle is in a certified condition through simply comparing information that could be made available on an emission control label with the components installed on a vehicle. Therefore, EPA proposes to remove the requirement to include the emission control system identifiers required in 40 CFR 1037.135(c)(6) and in Appendix III to 40 CFR part 1037 from the emission control labels for vehicles certified to the Phase 2 standards. However, the agencies may finalize requirements to maintain some label content to facilitate a limited visual inspection of key vehicle parameters that can be readily observed. Such requirements may be very similar to the labeling requirements from the Phase 1 rulemaking, though we would want to more carefully consider the list of technologies that would allow for the most effective inspection. We request comment on an appropriate list of candidate technologies that would properly balance the need to limit label content with the interest in providing the most useful information for inspectors to confirm that vehicles have been properly built. We are not proposing to modify the existing emission control labels for tractors certified for MYs 2014–2020 (Phase 1) CO<sub>2</sub> standards.

Under the agencies’ existing authorities, manufacturers must provide detailed build information for a specific vehicle upon our request. Our expectation is that this information should be available to us via email or other similar electronic communication

<sup>199</sup> Kenworth. “Kenworth T680 with PACCAR MX-13 Engine Lowers Costs for Oregon Open-Deck Carrier.” Last viewed on December 16, 2014 at <http://www.kenworth.com/news/news-releases/2013/december/t680-cotc.aspx>.

<sup>200</sup> National Energy Policy Institute. “What Set of Conditions Would Make the Business Case to Convert Heavy Trucks to Natural Gas?—A Case Study.” May 1, 2012. Last accessed on December 15, 2014 at [http://www.tagnaturalgasinfo.com/uploads/1/2/2/3/12232668/natural\\_gas\\_for\\_heavy\\_trucks.pdf](http://www.tagnaturalgasinfo.com/uploads/1/2/2/3/12232668/natural_gas_for_heavy_trucks.pdf).

<sup>201</sup> Westport presentation (2013). Last accessed on December 15, 2014 at [http://www.westport.com/file\\_library/files/webinar/2013-06-19\\_CN&andLNG.pdf](http://www.westport.com/file_library/files/webinar/2013-06-19_CN&andLNG.pdf).

on a same-day basis, or within 24 hours of a request at most. We request comment on any practical limitations in promptly providing this information. We also request comment on approaches that would minimize burden for manufacturers to respond to requests for vehicle build information and would expedite an authorized compliance inspector's visual inspection. For example, the agencies have started to explore ideas that would provide inspectors with an electronic method to identify vehicles and access on-line databases that would list all of the engine-specific and vehicle-specific emissions control system information. We believe that electronic and Internet technology exists today for using scan tools to read a bar code or radio frequency identification tag affixed to a vehicle that would then lead to secure on-line access to a database of manufacturers' detailed vehicle and engine build information. Our exploratory work on these ideas has raised questions about the level of effort that would be required to develop, implement and maintain an information technology system to provide inspectors real-time access to this information. We have also considered questions about privacy and data security. We request comment on the concept of electronic labels and database access, including any available information on similar systems that exist today and on burden estimates and approaches that could address concerns about privacy and data security. Based on new information that we receive, we may consider initiating a separate rulemaking effort to propose and request comment on implementing such an approach.

#### (g) End of Year Reports

In the Phase 1 program, manufacturers participating in the ABT program provided 90 day and 270 day reports to EPA and NHTSA after the end of the model year. The agencies adopted two reports for the initial program to help manufacturers become familiar with the reporting process. For the HD Phase 2 program, the agencies propose to simplify reporting such that manufacturers would only be required to submit the final report 90 days after the end of the model year with the potential to obtain approval for a delay up to 30 days. We are accordingly proposing to eliminate the end of year report, which represents a preliminary set of ABT figures for the preceding year. We welcome comment on this proposed revision.

#### (h) Special Compliance Provisions

In Phase 2, the agencies propose to consider the performance of the engine, transmission, and drivetrain in determining compliance with the Phase 2 tractor standards. With the inclusion of the engine's performance in the vehicle compliance, EPA proposes to modify the prohibition to introducing into U.S. commerce a tractor containing an engine not certified for use in tractor (see proposed 40 CFR 1037.601(a)(1)). In Phase 2, we no longer see the need to prohibit the use of vocational engines in tractors because the performance of the engine would be appropriately reflected in GEM. We welcome comment on removing this prohibition.

The agencies also propose to change the compliance process for manufacturers seeking to use the off-road exclusion. During the Phase 1 program, manufacturers realized that contacting the agencies in advance of the model year was necessary to determine whether vehicles would qualify for exemption and need approved certificates of conformity. The agencies found that the petition process allowed at the end of the model year was not necessary and that an informal approval during the precertification period was more effective. Therefore, NHTSA is proposing to remove its off-road petitioning process in 49 CFR 535.8 and EPA is proposing to add requirements for informal approvals in 40 CFR 1037.610.

#### (i) Chassis Dynamometer Testing Requirement

The agencies foresee the need to continue to track the progress of the Phase 2 program throughout its implementation. As discussed in Section II, the agencies expect to evaluate the overall performance of tractors with the GEM results provided by manufacturers through the end of year reports. However, we also need to continue to have confidence in our simulation tool, GEM, as the vehicle technologies continue to evolve. Therefore, EPA proposes that the manufacturers conduct annual chassis dynamometer testing of three sleeper cabs tractor and two day cab tractor and provide the data and the GEM result from each of these two tractor configurations to EPA (see 40 CFR 1037.665). We request comment on the costs and efficacy of this data submission requirement. We emphasize that this program would not be used for compliance or enforcement purposes.

#### F. Flexibility Provisions

EPA and NHTSA are proposing two flexibility provisions specifically for heavy-duty tractor manufacturers in Phase 2. These are an averaging, banking and trading program for CO<sub>2</sub> emissions and fuel consumption credits, as well as provisions for credits for off-cycle technologies which are not included as inputs to the GEM. Credits generated under these provisions can only be used within the same averaging set which generated the credit.

The agencies are also proposing to remove or modify several Phase 1 interim provisions, as described below.

##### (1) Averaging, Banking, and Trading (ABT) Program

Averaging, banking, and trading of emission credits have been an important part of many EPA mobile source programs under CAA Title II, and the NHTSA light-duty CAFE program. The agencies also included this flexibility in the HD Phase 1 program. ABT provisions are useful because they can help to address many potential issues of technological feasibility and lead-time, as well as considerations of cost. They provide manufacturers flexibilities that assist in the efficient development and implementation of new technologies and therefore enable new technologies to be implemented at a more aggressive pace than without ABT. A well-designed ABT program can also provide important environmental and energy security benefits by increasing the speed at which new technologies can be implemented. Between MYs 2013 and 2014 all four tractor manufacturers are taking advantage of the ABT provisions in the Phase 1 program. NHTSA and EPA propose to carry-over the Phase 1 ABT provisions for tractors into Phase 2.

The agencies propose to continue the five year credit life and three year deficit carry-over provisions from Phase 1 (40 CFR 1037.740(c) and 1037.745). Please see additional discussion in Section I.C.1.b. Although we are not proposing any additional restrictions on the use of Phase 1 credits, we are requesting comment on this issue. Early indications suggest that positive market reception to the Phase 1 technologies could lead to manufacturers accumulating credits surpluses that could be quite large at the beginning of the proposed Phase 2 program. This appears especially likely for tractors. The agencies are specifically requesting comment on the likelihood of this happening, and whether any regulatory changes would be appropriate. For example, should the agencies limit the amount of credits than could be carried

over from Phase 1 or limit them to the first year or two of the Phase 2 program? Also, if we determine that large surpluses are likely, how should that factor into our decision on the feasibility of more stringent standards in MY 2021?

We welcome comments on these proposed flexibilities and are interested in information that may indicate doing as proposed could distort the heavy-duty vehicle market.

## (2) Off-Cycle Technology Credits

In Phase 1, the agencies adopted an emissions and fuel consumption credit generating opportunity that applied to innovative technologies that reduce fuel consumption and CO<sub>2</sub> emissions. These technologies were required to not be in common use with heavy-duty vehicles before the 2010MY and not reflected in the GEM simulation tool (*i.e.*, the benefits are “off-cycle”). See 76 FR 57253. The agencies propose to largely continue, but redesignate the Phase 1 innovative technology program as part of the off-cycle program for Phase 2. In other words, beginning in 2021 MY all technologies that are not fully accounted for in the GEM simulation tool, or by compliance dynamometer testing could be considered off-cycle, including those technologies that may have been considered innovative technologies in Phase 1 of the program. The agencies propose to maintain the requirement that, in order for a manufacturer to receive credits for Phase 2, the off-cycle technology would still need to meet the requirement that it was not in common use prior to MY 2010. For additional information on the treatment of off-cycle technologies see Section I.C.1.c.

The agencies are proposing a split process for handling off-cycle technologies in Phase 2. First, there is a set of predefined off-cycle technologies that are entering the market today, but could be fully-recognized in our proposed HD Phase 2 certification procedures. Examples of such technologies include predictive cruise control, 6x2 axles, axle lubricants, automated tire inflation systems, and air conditioning efficiency improvements. For these technologies, the agencies propose to define the effectiveness value of these technologies similar to the approach taken in the MY2017–2025 light-duty rule (see 77 FR 62832–62840 (October 15, 2012)). These default effectiveness values could be used as valid inputs to Phase 2 GEM. The proposed effectiveness value of each technology is discussed above in Section III.D.2.

The agencies also recognize that there are emerging technologies today that are being developed, but would not be accounted for in the GEM inputs, therefore would be considered off-cycle. These technologies could include systems such as efficient steering systems, cooling fan optimization, and further tractor-trailer integration. These off-cycle technologies could include known, commercialized technologies if they are not yet widely utilized in a particular heavy-duty sector subcategory. Any credits for these technologies would need to be based on real-world fuel consumption and GHG reductions that can be measured with verifiable test methods using representative driving conditions typical of the engine or vehicle application.

The agencies propose that the approval for Phase 1 innovative technology credits (approved prior to 2021 MY) would be carried into the Phase 2 program on a limited basis for those technologies where the benefit is not accounted for in the Phase 2 test procedure. Therefore, the manufacturers would not be required to request new approval for any innovative credits carried into the off-cycle program, but would have to demonstrate the new cycle does not account for these improvements beginning in the 2021 MY. The agencies believe this is appropriate because technologies, such as those related to the transmission or driveline, may no longer be “off-cycle” because of the addition of these technologies into the Phase 2 version of GEM. The agencies also seek comments on whether off-cycle technologies in the Phase 2 program should be limited by infrequent common use and by what model years, if any. We also seek comments on an appropriate penetration rate for a technology not to be considered in common use.

As in Phase 1, the agencies are proposing to continue to provide two paths for approval of the test procedure to measure the CO<sub>2</sub> emissions and fuel consumption reductions of an off-cycle technology used in the HD tractor. See proposed 40 CFR 1037.610 and 49 CFR 535.7. The first path would not require a public approval process of the test method. A manufacturer could use “pre-approved” test methods for HD vehicles including the A-to-B chassis testing, powerpack testing or on-road testing. A manufacturer may also use any developed test procedure that has known quantifiable benefits. A test plan detailing the testing methodology would be required to be approved prior to collecting any test data. The agencies are also proposing to continue the

second path, which includes a public approval process of any testing method that could have questionable benefits (*i.e.*, an unknown usage rate for a technology). Furthermore, the agencies are proposing to modify their provisions to clarify what documentation must be submitted for approval, which would align them with provisions in 40 CFR 86.1869–12. NHTSA and EPA are also proposing to prohibit credits from technologies addressed by any of NHTSA’s crash avoidance safety rulemakings (*i.e.*, congestion management systems). See 77 FR 62733 (discussing similar issues in the context of the light-duty fuel economy and greenhouse gas reduction standards). We welcome recommendations on how to improve or streamline the off-cycle technology approval process.

## (3) Post Useful Life Modifications

Under 40 CFR part 1037, it is generally prohibited for any person to remove or render inoperative any emission control device installed to comply with the requirements of part 1037. However, in 40 CFR 1037.655 EPA clarifies that certain vehicle modifications are allowed after a vehicle reaches the end of its regulatory useful life. This section applies for all vehicles subject to 40 CFR part 1037 and would thus apply for trailers regulated in Phase 2. EPA is proposing to continue this provision and requests comment on it.

This section states (as examples) that it is generally allowable to remove tractor roof fairings after the end of the vehicle’s useful life if the vehicle will no longer be used primarily to pull box trailers, or to remove other fairings if the vehicle will no longer be used significantly on highways with vehicle speed of 55 miles per hour or higher. More generally, this section clarifies that owners may modify a vehicle for the purpose of reducing emissions, provided they have a reasonable technical basis for knowing that such modification will not increase emissions of any other pollutant. This essentially requires the owner to have information that would lead an engineer or other person familiar with engine and vehicle design and function to reasonably believe that the modifications will not increase emissions of any regulated pollutant. Thus, this provision does not provide a blanket allowance for modifications after the useful life.

This section also makes clear that no person may ever disable a vehicle speed limiter prior to its expiration point, or remove aerodynamic fairings from tractors that are used primarily to pull box trailers on highways. It is also clear that this allowance does not apply with

respect to engine modifications or recalibrations.

This section does not apply with respect to modifications that occur within the useful life period, other than to note that many such modifications to the vehicle during the useful life and to the engine at any time are presumed to violate 42 U.S.C. 7522(a)(3)(A). EPA notes, however, that this is merely a presumption, and would not prohibit modifications during the useful life where the owner clearly has a reasonable technical basis for knowing that the modifications would not cause the vehicle to exceed any applicable standard.

#### (4) Other Interim Provisions

In HD Phase 1, EPA adopted provisions to delay the onboard diagnostics (OBD) requirements for heavy-duty hybrid powertrains (see 40 CFR 86.010–18(q)). This provision delayed full OBD requirements for hybrids until 2016 and 2017 model years. In discussion with manufacturers during the development of Phase 2, the agencies have learned that meeting the on-board diagnostic requirements for criteria pollutant engine certification continues to be a potential impediment to adoption of hybrid systems. See Section XIV.A.1 for a discussion of regulatory changes proposed to reduce the non-GHG certification burden for engines paired with hybrid powertrain systems.

#### (5) Phase 1 Flexibilities Not Proposed for Phase 2

The Phase 1 advanced technology credits were adopted to promote the implementation of advanced technologies, such as hybrid powertrains, Rankine cycle engines, all-electric vehicles, and fuel cell vehicles (see 40 CFR 1037.150(i)). As the agencies stated in the Phase 1 final rule, the Phase 1 standards were not premised on the use of advanced technologies but we expected these advanced technologies to be an important part of the Phase 2 rulemaking (76 FR 57133, September 15, 2011). The proposed HD Phase 2 heavy-duty engine and tractor standards are premised on the use of Rankine-cycle engines, therefore the agencies believe it is no longer appropriate to provide extra credit for this technology. While the agencies have not premised the proposed HD Phase 2 tractor standards on hybrid powertrains, fuel cells, or electric vehicles, we also foresee some limited use of these technologies in 2021 and beyond. Therefore, we propose to not provide advanced technology credits in Phase 2 for any

technology, but we welcome comments on the need for such incentive.

Also in Phase 1, the agencies adopted early credits to create incentives for manufacturers to introduce more efficient engines and vehicles earlier than they otherwise would have planned to do (see 40 CFR 1037.150(a)). The agencies are not proposing to extend this flexibility to Phase 2 because the ABT program from Phase 1 will be available to manufacturers in 2020 model year and this would displace the need for early credits.

#### IV. Trailers

As mentioned in Section III, trailers pulled by Class 7 and 8 tractors (together considered “tractor-trailers”) account for approximately two-thirds of the heavy-duty sector’s total CO<sub>2</sub> emissions and fuel consumption. Because neither trailers nor the tractors that pull them are useful by themselves, it is the combination of the tractor and the trailer that forms the useful vehicle. Although trailers do not directly generate exhaust emissions or consume fuels (except for the refrigeration units on refrigerated trailers), their designs and operation nevertheless contribute substantially to the CO<sub>2</sub> emissions and diesel fuel consumption of the tractors pulling them. See also Section I.E (1) and (2) above.

The agencies are proposing standards for trailers specifically designed to be drawn by Class 7 and 8 tractors when coupled to the tractor’s fifth wheel. The agencies are not proposing standards for trailers designed to be drawn by vehicles other than tractors, and those that are coupled to vehicles with pintle hooks or hitches instead of a fifth wheel. These proposed standards are expressed as CO<sub>2</sub> and fuel consumption standards, and would apply to each trailer with respect to the emissions and fuel consumption that would be expected for a specific standard type of tractor pulling such a trailer. Note that this approach is discussed in more detail later. Nevertheless, EPA and NHTSA believe it is appropriate to establish standards for trailers separately from tractors because they are separately manufactured by distinct companies; the agencies are not aware of any manufacturers that currently assemble both the finished tractor and the trailer.

##### A. Summary of Trailer Consideration in Phase 1

In the Phase 1 program, the agencies did not regulate trailers, but discussed how we might do so in the future (see 76 FR 57362). We chose not to regulate trailers at that time, primarily because of the lack of a proposed test procedure, as

well as the technical and policy issues at that time. The agencies also noted the large number of small businesses in this industry, the possibility that regulations would substantially impact these small businesses, and the agencies’ consequent obligations under the Small Business Regulatory Enforcement Fairness Act.<sup>202</sup> However, the agencies did indicate the potential CO<sub>2</sub> and fuel consumption benefits of including trailers in the program and we committed to consider establishing standards for trailers in future rulemakings.

In the Phase 1 proposal, the agencies solicited general comments on controlling CO<sub>2</sub> emissions and fuel consumption through future trailer regulations (see 75 FR 74345–74351). Although we neither proposed nor finalized trailer regulations at that time, the agencies have considered those comments in developing this proposal. This notice proposes the first EPA regulations covering trailer manufacturers for CO<sub>2</sub> emissions (or any other emissions), and the first fuel consumption regulations by NHTSA for these manufacturers. The agencies intend for this program to be a unified national program so that when a trailer model complies with EPA’s standards it will also comply with NHTSA’s standards.

##### B. The Trailer Industry

###### (1) Industry Characterization

The trailer industry encompasses a wide variety of trailer applications and designs. Among these are box trailers (dry vans and refrigerated vans of all sizes) and “non-box” trailers, including platform (sometimes called “flatbed”), tanker, container chassis, bulk, dump, grain, and many specialized types of trailers, such as car carriers, pole trailers, and logging trailers. Most trailers are designed for predominant use on paved streets, roads, and highways (called “highway trailers” for purposes of this proposed rule). A relatively small number of trailers are designed for dedicated use in logging and mining operations or for use in

<sup>202</sup> The Regulatory Flexibility Act (RFA), as amended by the Small Business Regulatory Enforcement Fairness Act (SBREFA), requires agencies to account for economic impacts of all rules that may have a significant impact on a substantial number of small businesses and in addition contains provisions specially applicable to EPA requiring a multi-agency pre-proposal process involving outreach and consultation with representatives of potentially affected small businesses. See <http://www.epa.gov/rfa/> for more information. Note that for this Phase 2 proposal, EPA has completed a Small Business Advocacy Review panel process that included small trailer manufacturers, as discussed in XIV.C below.

applications that we expect would involve little or no time on paved roadways. A more detailed description of the characteristics that distinguish these trailers is included in Section IV.C.(5).

The trailer manufacturing industry is very competitive, and manufacturers are highly responsive to their customers' diverse demands. The wide range of trailer designs and features reflects the broad variety of customer needs, chief among them typically being the ability to maximize the amount of freight the trailer can transport. Other design goals reflect the numerous, more specialized customer needs.

Box trailers are the most common type of trailer and are made in many different lengths, generally ranging from 28 feet to 53 feet. While all have a rectangular shape, they can vary widely in basic construction design (internal volume and weight), materials (steel, fiberglass composites, aluminum, and wood) and the number and configuration of axles (usually two axles closely spaced, but number and spacing of axles can be greater). Box trailer designs may also include additional features, such as one or more side doors, out-swinging or roll-up rear doors, side or rear lift gates, and numerous types of undercarriage accessories.

Non-box trailers are uniquely designed to transport a specific type of freight. Platform trailers carry cargo that may not be easily contained within or loaded and unloaded into a box trailer, such as large, nonuniform equipment or machine components. Tank trailers are often pressure-tight enclosures designed to carry liquids, gases or bulk, dry solids and semi-solids. There are also a number of other specialized trailers such as grain, dump, automobile hauler, livestock trailers, construction and heavy-hauling trailers.

Chapter 1 of the Draft RIA includes a more thorough characterization of the trailer industry. The agencies have considered the variety of trailer designs and applications in developing the proposed CO<sub>2</sub> emissions and fuel consumption standards for trailers.

## (2) Historical Context for Proposed Trailer Provisions

### (a) SmartWay Program

EPA's voluntary SmartWay Transport Partnership program encourages businesses to take actions that reduce fuel consumption and CO<sub>2</sub> emissions while cutting costs. See Section I.A.2.f above. SmartWay staff work with the shipping, logistics, and carrier communities to identify low carbon strategies and technologies across their

transportation supply chains. It is a voluntary, fleet-targeted program that provides an objective ranking of a fleet's freight efficiency relative to its competitors. SmartWay Partners commit to adopting fuel-saving practices and technologies relative to a baseline year as well as tracking their progress.

EPA's SmartWay program has accelerated the availability and market penetration of advanced, fuel efficient technologies and operational practices. In conjunction with the SmartWay Partners Program, EPA established a testing, verification, and designation program, the SmartWay Technology Program, to help freight companies identify the equipment, technologies, and strategies that save fuel and lower emissions. SmartWay verifies the performance of aerodynamic equipment and low rolling resistance tires and maintains a list of verified technologies on its Web site. The trailer aerodynamic technologies verified are grouped in bins that represent one percent, four percent, or five percent fuel savings relative to a typical long-haul tractor-trailer at 65-mph cruise conditions. Historically, use of verified aerodynamic devices totaling at least five percent fuel savings, along with verified tires, qualifies a 53-foot dry van trailer for the "SmartWay Trailer" designation. In 2014, EPA expanded the program to qualify trailers as "SmartWay Elite" if they use verified tires and aerodynamic equipment providing nine percent or greater fuel savings. The 2014 updates also expanded the SmartWay-designated trailer eligibility to include 53-foot refrigerated van trailers in addition to 53-foot dry van trailers.

The SmartWay Technology Program continues to improve the technical quality of data that EPA and stakeholders need for verification. EPA bases its SmartWay verifications on common industry test methods using SmartWay-specified testing protocols. Historically, SmartWay's aerodynamic equipment verification was performed using the SAE J1321 test procedure, which measures fuel consumption as the test vehicle drives laps around a test track. Under SmartWay's 2014 updates, EPA expanded its trailer designation and equipment verification programs to allow additional testing options. The updates included a new, more stringent 2014 track test protocol based on SAE's 2012 update to its SAE J1321 test method,<sup>203</sup> as well as protocols for wind

tunnel, coastdown, and possibly computational fluid dynamics (CFD) approaches. These new protocols are based on stakeholder input, the latest industry standards (*i.e.*, 2012 versions of the SAE fuel consumption and wind tunnel test<sup>204</sup> methods), EPA's own testing and research, and lessons learned from years of implementing technology verification programs. Wind tunnel, coastdown, and CFD testing produce values for aerodynamic drag improvements in terms of coefficient of drag ( $C_D$ ), which is then related to projected fuel savings using a mathematical curve.<sup>205</sup>

SmartWay verifies tires based on test data submitted by tire manufacturers demonstrating the coefficient of rolling resistance ( $C_{RR}$ ) of their tires using either the SAE J1269 or ISO 28580 test methods. These verified tires have rolling resistance targets for each axle position on the tractor-trailer. SmartWay-verified trailer tires achieve a  $C_{RR}$  of 5.1 kg/metric ton or less on the ISO28580 test method. An operator who replaces the trailer tires with SmartWay-verified tires can expect fuel consumption savings of one percent or more at a 65-mph cruise. Operators who apply SmartWay-verified tires on both the trailer *and* tractor can achieve three percent fuel consumption savings at 65-mph.

Over the last decade, SmartWay partners have demonstrated measureable fuel consumption benefits by adding aerodynamic features and low rolling resistance tires to their 53-foot dry van trailers. To date, SmartWay has verified over 70 technologies, including nine packages from five manufacturers that have received the Elite designation. The SmartWay Transport program has worked with over 3,000 partners, the majority of which are trucking fleets, and broadly throughout the supply-chain industry, since 2004. These relationships, combined with the Technology Program's extensive involvement in the HD vehicle technology industry, have provided EPA with significant experience in freight fuel efficiency. Furthermore, the more than 10-year duration of the voluntary SmartWay Transport Partnership has resulted in significant fleet and manufacturer experience with innovating and deploying technologies

<sup>204</sup> SAE International. Wind Tunnel Test Procedure for Trucks and Buses. SAE Standard J1252. Revised 2012-07-16. Available at: [http://standards.sae.org/j1252\\_201207/](http://standards.sae.org/j1252_201207/).

<sup>205</sup> McCallen, R., et al. Progress in Reducing Aerodynamic Drag for Higher Efficiency of Heavy Duty Trucks (Class 7-8). SAE Technical Paper. 1999-01-2238.

<sup>203</sup> SAE International. Fuel Consumption Test Procedure—Type II. SAE Standard J1321. Revised 2012-02-06. Available at: [http://standards.sae.org/j1321\\_201202/](http://standards.sae.org/j1321_201202/).

that reduce CO<sub>2</sub> emissions and fuel consumption.

#### (b) California Tractor-Trailer Greenhouse Gas Regulation

The state of California passed the Global Warming Solutions Act of 2006 (Assembly Bill 32, or AB32), enacting the state's 2020 greenhouse gas emissions reduction goal into law. Pursuant to this Act, the California Air Resource Board (CARB) was required to begin developing early actions to reduce GHG emissions. As a part of a larger effort to comply with AB32, the California Air Resource Board issued a regulation entitled "Heavy-Duty Greenhouse Gas Emission Reduction Regulation" in December 2008.

This regulation reduces GHG emissions by requiring improvement in the efficiency of heavy-duty tractors and 53 foot or longer dry and refrigerated box trailers that operate in California.<sup>206</sup> The program is being phased in between 2010 and 2020. Small fleets have been allowed special compliance opportunities to phase in the retrofits of their existing trailer fleets through 2017. The regulation requires affected trailer fleet owners to either use SmartWay-verified trailers or to retrofit trailers with SmartWay-verified technologies. The efficiency improvements are achieved through the use of aerodynamic equipment and low rolling resistance tires on both the tractor and trailer. EPA has granted a waiver for this California program.<sup>207</sup>

#### (c) NHTSA Safety-Related Regulations for Trailers and Tires

NHTSA regulates new trailer safety through regulations. Table IV–1 lists the current regulations in place related to trailers. Trailer manufacturers will continue to be required to meet current safety regulations for the trailers they produce. We welcome any comments on additional regulations that are not included and particularly those that may be incompatible with the regulations outlined in this proposal.

FMVSS Nos. 223 and 224<sup>208</sup> require installation of rear guard protection on

trailers. The definition of rear extremity of the trailer in 223 limits installation of rear fairings to a specified zone behind the trailer. The agencies request comment on any issues associated with installing potential boat tails or other rear aerodynamic fairings that would be more effective than current designs, given the current definition of trailer rear extremity in FMVSS 223.

**TABLE IV–1 CURRENT NHTSA STATUTES AND REGULATIONS RELATED TO TRAILERS**

Reference	Title
49 CFR 565 ...	Vehicle Identification Number (VIN) Requirements.
49 CFR 566 ...	Manufacturer Identification.
49 CFR 567 ...	Certification.
49 CFR 568 ...	Vehicles Manufactured in Two or More Stages.
49 CFR 569 ...	Regrooved Tires.
49 CFR 571 ...	Federal Motor Vehicle Safety Standards.
49 CFR 573 ...	Defect and Noncompliance Responsibility and Reports.
49 CFR 574 ...	Tire Identification and Recordkeeping.
49 CFR 575 ...	Consumer Information.
49 CFR 576 ...	Record Retention.

#### (d) Additional DOT Regulations Related to Trailers

In addition to NHTSA's regulations, DOT's Federal Highway Administration (FHWA) regulates the weight and dimensions of motor vehicles on the National Network.<sup>209</sup> FHWA's regulations limit states from setting truck size and weight limits beyond certain ranges for vehicles used on the National Network. Specifically, vehicle weight and truck tractor-semitrailer length and width are limited by FHWA.<sup>210</sup> EPA and NHTSA do not anticipate any conflicts between FHWA's regulations and those proposed in this rulemaking.

#### (3) Agencies' Outreach in Developing This Proposal

In developing this proposed rule, EPA and NHTSA staff met and consulted with a wide range of organizations that have an interest in trailer regulations. Staff from both agencies met representatives of the Truck Trailer Manufacturers Association, the National Trailer Dealers Association, and the American Trucking Association, including their Fuel Efficiency Advisory Committee and their Technology and Maintenance Council. We also met with and visited the facilities of several

individual trailer manufacturers, trailer aerodynamic device manufacturing companies, and trailer tire manufacturers, as well as visited an aerodynamic wind tunnel test facility and two independent tire testing facilities. The agencies consulted with representatives from California Air Resources Board, the International Council on Clean Transportation, the North American Council for Freight Efficiency, and several environmental NGOs.

In addition to these informal meetings, and as noted above, EPA also conducted several outreach meetings with representatives from small business trailer manufacturers as required under section 609(b) of the Regulatory Flexibility Act (RFA) and amended by the Small Business Regulatory Enforcement Fairness Act of 1996 (SBREFA). EPA convened a Small Business Advocacy Review (SBAR) Panel, and additional information regarding the findings and recommendations of the Panel are available in Section XIV below and in the Panel's final report.<sup>211</sup> EPA worked with NHTSA to propose flexibilities in response to EPA's SBAR Panel (as outlined in Section IV. F(6)(f) with more detail provided in Chapter 12 of the draft RIA). We welcome comments from all entities and the public to all aspects of this proposal.

#### C. Proposed Phase 2 Trailer Standards

This proposed rule proposes, for the first time, a set of CO<sub>2</sub> emission and fuel consumption standards for manufacturers of new trailers that would phase in over a period of nine years and continue to reduce CO<sub>2</sub> emissions and fuel consumption in the years to follow. The proposed standards are expressed as overall CO<sub>2</sub> emissions and fuel consumption performance standards considering the trailer as an integral part of the tractor-trailer vehicle.

The agencies are proposing trailer standards that we believe well implement our respective statutory obligations. The agencies believe that a proposed set of standards with similar stringencies, but less lead-time (referred to as "Alternative 4" and discussed in more detail later) has the potential to be the maximum feasible alternative within the meaning of section 32902 (k) of EISA, and appropriate under EPA's CAA authority (sections 202 (a)(1) and (2)). However, based on the evidence

<sup>211</sup> Final Report of the Small Business Advocacy Review Panel on EPA's Planned Proposed Rule: Greenhouse Gas Emissions and Fuel Efficiency Standards for Medium- and Heavy-Duty Engines and Vehicles: Phase 2, January 15, 2015.

<sup>206</sup> Recently, in December 2013, ARB adopted regulations that establish its own parallel Phase 1 program with standards consistent with the EPA Phase 1 tractor standards. On December 5, 2014 California's Office of Administrative Law approved ARB's adoption of the Phase 1 standards, with an effective date of December 5, 2014.

<sup>207</sup> See EPA's waiver of CARB's heavy-duty tractor-trailer greenhouse gas regulation applicable to new 2011 through 2013 model year Class 8 tractors equipped with integrated sleeper berths (sleeper-cab tractors) and 2011 and subsequent model year dry-can and refrigerated-van trailers that are pulled by such tractors on California highways at 79 FR 46256 (August 7, 2014).

<sup>208</sup> 49 CFR 571.223, 224.

<sup>209</sup> 23 CFR 658.9.

<sup>210</sup> 23 CFR part 658.



currently before us, EPA and NHTSA have outstanding questions regarding relative risks and benefits of Alternative 4 due to the timeframe envisioned by that alternative. The proposed alternative (referred to as “Alternative 3” and discussed in more detail later) is generally designed to achieve the levels of fuel consumption and GHG reduction that Alternative 4 would achieve, but with several years of additional lead-time. Put another way, the Alternative 3 standards would result in the same stringency as the Alternative 4 standards, but several years later, meaning that manufacturers could, in theory apply new technology at a more gradual pace and with greater flexibility. Additional lead-time will also provide for a more gradual implementation of full compliance program, which could be especially helpful for this newly-regulated trailer industry. It is possible that the agencies could adopt, in full or in part, stringencies from Alternative 4 in the final rule. The agencies seek comment on the lead-time and market penetration in these alternatives.

The agencies are not proposing standards for CO<sub>2</sub> emissions and fuel consumption from the transport refrigeration units (TRUs) used on refrigerated box trailers. Additionally, EPA is not proposing standards for hydrofluorocarbon (HFC) emissions from TRUs. See Section IV.C.(4)

It is worth noting that the proposed standards for box trailers are based in part on the expectation that the proposed program would allow emissions averaging. However, as discussed in Section IV.F. below, given the specific structure and competitive nature of the trailer industry, we request comment on the advantages and disadvantages of implementing the proposed standards without an averaging program. Commenters addressing the stringency of the proposed standards are encouraged to address stringency in the context of compliance programs with and without averaging.

#### (1) Trailer Designs Covered by This Proposed Rule

As described previously, the trailer industry produces many different trailer designs for many different applications. The agencies are proposing standards for a majority of these trailers. Note that these proposed regulations apply to trailers designed for being drawn by a tractor when coupled to the tractor's fifth wheel. As described in detail in Section IV.C below, the agencies are proposing standards that would phase in between MY 2018 and 2027; the NHTSA standards would be voluntary

until MY 2021. The proposed standards would apply to most types of trailers. For most box trailers, these standards would be based on the use of various technologies to improve aerodynamic performance, and on improved tire efficiency through low rolling resistance tires and use of automatic tire inflation (ATI) systems. As discussed below, the agencies have identified some trailers with characteristics that limit the aerodynamics that can be applied, and are proposing reduced the stringencies for those trailer types. As described in Sections IV.D.(1)(d) and (2)(d) below, although manufacturers can reduce trailer weight to reduce fuel costs by reducing trailer weight, these standards are not predicated on weight reduction for the industry.

The most comprehensive set of proposed requirements would apply to long box trailers, which include refrigerated and non-refrigerated (dry) vans. Long box trailers are the largest trailer category and are typically paired with high roof cab tractors that have high annual vehicle miles traveled (VMT) and high average speeds, and therefore offer the greatest potential for CO<sub>2</sub> and fuel consumption reductions. Many of the aerodynamic and tire technologies considered for long box trailers in this proposal are similar to those used in EPA's SmartWay program and required by California's Heavy-Duty Greenhouse Gas Emission Reduction Regulation. Many manufacturers and operators of box trailers have experience with these CO<sub>2</sub>- and fuel consumption-reducing technologies. In addition to SmartWay partners and those fleets affected by the California regulation, many operators also seek such technologies in response to high fuel prices and the prospect of improved fuel efficiency. As a result, more data about the performance of these technologies exist for long box trailers than for other trailer types. Short box vans do not have the benefit of programs such as SmartWay to provide an incentive for development of and a reliable evaluation and promotion of CO<sub>2</sub>- and fuel consumption-reducing technologies for their trailers. In addition, short box trailers are more frequently used in short-haul and urban operations, which may limit the potential effectiveness of these technologies. As such, EPA is proposing less stringent requirements for manufacturers of short box trailers.

Some trailer designs include features that can affect the practicality or the effectiveness of devices that manufacturers may consider to lower their CO<sub>2</sub> emissions and fuel consumption. We are proposing to recognize box trailers that are restricted

from using aerodynamic devices in one location on the trailer as “partial-aero” box trailers.<sup>212</sup> The proposed standards for these trailers are based on the proposed standards for full-aero box-trailers, but would be less stringent than when the program is fully phased in.

We propose that box trailers that have work-performing devices in two locations such that they inhibit the use of *all* practical aerodynamic devices be considered “non-aero” box trailers in this proposal. The proposed standards for non-aero box trailers are predicated on the use of tire technologies—lower rolling resistance tires and ATI. We are proposing similar standards for non-box trailers (including applications such as dump trailers and agricultural trailers that are designed to be used both on and off the highway).

We are proposing to completely exclude several types of trailers from this trailer program. These excluded trailers would include those designed for dedicated in-field operations related to logging and mining. In addition, we are proposing to exclude heavy-haul trailers and trailers the primary function of which is performed while they are stationary. For all of these excluded trailers, manufacturers would not have any regulatory requirements under this program, and would not be subject to the proposed trailer compliance requirements. We seek comment on the appropriateness of excluding these types of trailers from the proposed trailer program and whether other trailer designs should be excluded. Section IV. C. (5) discusses these trailer types we propose to exclude and the physical characteristics that would define these trailers.

In summary, the agencies are proposing separate standards for ten trailer subcategories:

- Long box (longer than 50 feet<sup>213</sup>) dry vans
- Long box (longer than 50 feet) refrigerated vans
- Short box (50 feet and shorter) dry vans
- Short box (50 feet and shorter) refrigerated vans
- Partial-aero long box dry vans
- Partial-aero long box refrigerated vans
- Partial-aero short box dry vans

<sup>212</sup> Examples of types of work-performing components, equipment, or designs that the agencies might consider as warranting recognition as partial-aero or non-aero trailers include side or end lift gates, belly boxes, pull-out platforms or steps for side door access, and drop-deck designs. See 40 CFR 1037.107 and 49 CFR 535.5(e).

<sup>213</sup> Most long trailers are 53 feet in length; we are proposing a cut-point of 50 feet to avoid an unintended incentive for an OEM to slightly shorten a trailer design in order to avoid the new regulatory requirements.

- Partial-aero short box refrigerated vans
- Non-aero box vans (all lengths of dry and refrigerated vans)
- Non-box trailers (tanker, platform, container chassis, and all other types of highway trailers that are not box trailers)

As discussed in the next section, partial-aero box trailers would have the same standards as their corresponding full-aero trailers in the early phase-in years, and would have separate, less stringent standards as the program is fully implemented. Section IV. C. (5) introduces these proposed partial-aero trailer standards and Section IV. D. describes the technologies that could be applied to meet these proposed standards.

#### (2) Proposed Fuel Consumption and CO<sub>2</sub> Standards

As described in previously, it is the combination of the tractor and the trailer that form the useful vehicle, and trailer designs substantially affect the CO<sub>2</sub> emissions and diesel fuel consumption of the tractors pulling them. Note that although the agencies are proposing new CO<sub>2</sub> and fuel consumption standards for trailers separately from tractors, we set the numerical level of the trailer standards (see Section IV.D below) in relation to “standard” reference tractors in recognition of their interrelatedness. In other words, the regulatory standards refer to the simulated emissions and fuel consumption of a standard tractor pulling the trailer being certified.

The agencies project that these proposed standards, when fully

implemented in MY (model year) 2027, would achieve fuel consumption and CO<sub>2</sub> emissions reductions of three to eight percent, depending on trailer subcategory. These projected reductions assume a degree of technology adoption into the future absent the proposed program and are evaluated on a weighted drive cycle (see Section IV. D. (3)). We expect that the MY 2027 standards would be met with high-performing aerodynamic and tire technologies largely available in the marketplace today. With a lead-time of more than 10 years, the agencies believe that both trailer construction and bolt-on CO<sub>2</sub>- and fuel consumption-reducing technologies will advance well beyond the performance of their current counterparts that exist today. A description of technologies that the agencies considered for this proposal is provided in Section IV. D.

The agencies designed this proposed trailer program to ensure a gradual progression of both stringency and compliance requirements in order to limit the impact on this newly-regulated industry. The agencies are proposing progressively more stringent standards in three-year stages leading up to the MY 2027.<sup>214</sup> The agencies are proposing several options to reduce compliance burden (see Section IV. F.) in the early years as the industry gains experience with the program. EPA is proposing to initiate its program in 2018 with modest standards for long box dry and refrigerated vans that can be met with common SmartWay-verified aerodynamic and tire technologies. In this early stage, we expect that manufacturers of the other trailer

subcategories would meet those standards by using tire technologies only. Standards that we propose for the next stages, which we propose to begin in MY 2021, MY 2024, and MY 2027, would gradually increase in stringency for each subcategory, including the introduction of standards for shorter box vans that we expect would be met by applying both aerodynamic and tire technologies. NHTSA’s regulations would be voluntary until MY 2021 as described in Section IV. C. (3).

Table IV–2 below presents the CO<sub>2</sub> and fuel consumption phase-in standards, beginning in MY 2018 that the agencies are proposing for trailers. The standards are expressed in grams of CO<sub>2</sub> per ton-mile and gallons of fuel per 1,000 ton-miles to reflect the load-carrying capacity of the trailers. Partial-aero trailers would be subject to the same standards as their corresponding “full aero” trailers for MY 2018 through MY 2026. In MY 2027 and the years to follow, partial-aero trailers would continue to meet the standards for MY 2024.

The agencies are not proposing CO<sub>2</sub> or fuel consumption standards predicated on aerodynamic improvements for non-box trailers or non-aero box vans at any stage of this proposed program. Instead, we are proposing design standards that would require manufacturers of these trailers to adopt specific tire technologies and thus to comply without aerodynamic devices. We believe that this approach would significantly limit the compliance burden for these manufacturers and request comment on this provision.<sup>215</sup>

TABLE IV–2—PROPOSED TRAILER CO<sub>2</sub> AND FUEL CONSUMPTION STANDARDS FOR BOX TRAILERS

Model year	Subcategory	Dry van		Refrigerated van	
		Long	Short	Long	Short
2018–2020 .....	EPA Standard ..... (CO <sub>2</sub> Grams per Ton-Mile).	83	144	84	147
	Voluntary NHTSA Standard ..... (Gallons per 1,000 Ton-Mile).	8.1532	14.1454	8.2515	14.4401
2021–2023 .....	EPA Standard ..... (CO <sub>2</sub> Grams per Ton-Mile).	81	142	82	146
	NHTSA Standard ..... (Gallons per 1,000 Ton-Mile).	7.9568	13.9489	8.0550	14.3418
2024–2026 .....	EPA Standard ..... (CO <sub>2</sub> Grams per Ton-Mile).	79	141	81	144
	NHTSA Standard ..... (Gallons per 1,000 Ton-Mile).	7.7603	13.8507	7.9568	14.1454
2027 + .....	EPA Standard ..... (CO <sub>2</sub> Grams per Ton-Mile).	77	140	80	144
	NHTSA Standard ..... (Gallons per 1,000 Ton-Mile).	7.5639	13.7525	7.8585	14.1454

<sup>214</sup> These stages are consistent with NHTSA’s stability requirements under EISA.

<sup>215</sup> The agencies are not proposing provisions to allow averaging for non-box trailers, non-aero box trailers, or partial-aero box trailers, and this reduced

flexibility would likely have the effect of requiring compliant tire technologies to be used.

Differences in the numerical values of these standards among trailer subcategories are due to differences in the tractor-trailer characteristics, as well as differences in the default payloads, in the vehicle simulation model we used to develop the proposed standards (as described in Section IV. D. (3) (a) below). Lower numerical values in Table IV-2 do not necessarily indicate more stringent standards. For instance, the proposed standards for dry and refrigerated vans of the same length have the same stringency through MY 2026, but the standards recognize differences in trailer weight and aerodynamic performance due to the TRU on refrigerated vans. Trailers of the same type but different length differ in weight as well as in the number of axles (and tires), tractor type, payload and aerodynamic performance. Section IV. D. and Chapter 2.10 of the draft RIA provide more details on the characteristics of the tractor-trailer vehicles, with various technologies, that are the basis for these standards.

In developing the proposed standards for trailers, the agencies evaluated the current level of CO<sub>2</sub> emissions and fuel consumption, the types and availability of technologies that could be applied to reduce CO<sub>2</sub> and fuel consumption, and the current adoption rates of these technologies. Additionally, we considered the necessary lead-time and associated costs to the industry to meet these standards, as well as the fuel savings to the consumer and magnitude of CO<sub>2</sub> and fuel savings that we project would be achieved as a result of these proposed standards. As discussed in more detail later in this preamble and in Chapter 2.10 of the draft RIA, the analyses of trailer aerodynamic and tire technologies that the agencies have conducted appear to show that these proposed standards would be the maximum feasible and appropriate in the lead-time provided under each agency's respective statutory authorities. We ask that any comments related to stringency include data whenever possible indicating the potential effectiveness and cost of adding such devices to these vehicles.

The agencies request comment on all aspects of these proposed standards, including trailers to be covered and the proposed 50-foot demarcation between "long" and "short" box vans, the proposed phase-in schedule, and the stringency of the standards in relation to their cost, CO<sub>2</sub> and fuel consumption reductions, and on the proposed compliance provisions, as discussed in Section IV. F.

In addition to these proposed trailer standards, the agencies considered

standards both less stringent and more stringent than the proposed standards. We specifically request comment on a set of accelerated standards that we considered, as presented in Section IV. E. This set of standards is predicated on performance and penetration rates of the same technologies as the proposed standards, but would reach full implementation three years sooner.

#### (3) Lead-Time Considerations

As mentioned earlier, although the agencies did not include standards for trailers in Phase 1, box trailer manufacturers have been gaining experience with CO<sub>2</sub>- and fuel consumption-reducing technologies over the past several years, and the agencies expect that trend to continue, due in part to EPA's SmartWay program and California's Tractor-Trailer Greenhouse Gas Regulation. Most manufacturers of long box trailers have some experience installing these aerodynamic and tire technologies for customers. This experience impacts how much lead-time is necessary from a technological perspective. EPA is proposing CO<sub>2</sub> emission standards for long box trailers for MY 2018 that represent stringency levels similar to those used for SmartWay verification and required for the California regulation, and thus could be met by adopting off-the-shelf aerodynamic and tire technologies available today. The NHTSA program from 2018 through 2020 would be voluntary.

Manufacturers of trailers other than 53-foot box vans do not have the benefit of programs such as SmartWay to provide a reliable evaluation and promotion of these technologies for their trailers and therefore have less experience with these technologies. As such, EPA is proposing less stringent requirements for manufacturers of other highway trailer subcategories beginning in MY 2018. We expect these manufacturers of short box trailers would adopt some aerodynamic and tire technologies, and manufacturers of other trailers would adopt tire technologies only, as a means of achieving the proposed standards. Some manufacturers of trailers other than long boxes may not yet have direct experience with these technologies, but the technologies they would need are fairly simple and can be incorporated into trailer production lines without significant process changes. Also, the NHTSA program for these trailers would be voluntary until MY 2021.

The agencies believe that the burdens of installing and marketing these technologies would not be limiting factors in determining necessary lead-

time for manufacturers of these trailers. Instead, we expect that the proposed first-time compliance and, in some cases, performance testing requirements, would be the more challenging obstacles for this newly regulated industry. For these reasons, we are proposing that these standards phase in over a period of nine years, with flexibilities that would minimize the compliance and testing burdens in the early years of the proposed program (see Section IV. F.).

As mentioned previously, EPA is proposing modest standards and several compliance options that would allow it to begin its program for MY 2018. However, EISA requires four model years of lead-time for fuel consumption standards, regardless of the stringency level or availability of flexibilities. Therefore, NHTSA's proposed fuel consumption requirements would not become mandatory until MY 2021. Prior to MY 2021, trailer manufacturers could voluntarily participate in NHTSA's program, noting that once they made such a choice, they would need to stay in the program for all succeeding model years.<sup>216</sup>

The agencies believe that the expected period of seven years or more between the issuing of the final rules and full implementation of the program would provide sufficient lead-time for all affected trailer manufacturers to adopt CO<sub>2</sub>- and fuel consumption-reducing technologies or design trailers to meet the proposed standards.

#### (4) Non-CO<sub>2</sub> GHG Emissions from Trailers

In addition to the impact of trailer design on the CO<sub>2</sub> emissions of tractor-trailer vehicles, the agencies recognize that refrigerated trailers can also be a source of emissions of HFCs. Specifically, HFC refrigerants that are used in transport refrigeration units (TRUs) have the potential to leak into the atmosphere. We do not currently believe that HFC leakage is likely to become a major problem in the near future, and we are not proposing provisions addressing refrigerant leakage of trailer-related HFCs in this proposed rulemaking. TRUs differ from the other source categories where EPA has adopted (or proposed) to apply HFC leakage requirements (*i.e.*, air conditioning). We believe trailer owners have a strong incentive to limit refrigerant leakage in order to maintain the operability of the trailer's refrigeration unit and avoid financial liability for damage to perishable freight due to a failure to maintain the agreed-

<sup>216</sup> NHTSA adopted a similar voluntary approach in the first years of Phase 1 (see 76 FR 57106).

upon temperature and humidity conditions. In addition, refrigerated van units represent a relatively small fraction of new trailers. Nevertheless, we request comment on this issue, including any data on typical TRU charge capacity, the frequency of HFC refrigerant leakage from these units across the fleet, the magnitude of unaddressed leakage from individual units, and how potential EPA regulations might address this leakage issue.

#### (5) Exclusions and Less-Stringent Standards

All trailers built before January 1, 2018 are excluded from the Phase 2 trailer program, and from 40 CFR part 1037 and 49 CFR part 535 in general (see 40 CFR 1037.5(g) and 49 CFR 535.3(e)). Furthermore, the proposed regulations do not apply to trailers designed to be drawn by vehicles other than tractors, and those that are coupled to vehicles with pintle hooks or hitches instead of a fifth wheel. As stated previously, we are proposing that non-box trailers that are designed for dedicated use with in-field operations related to logging and mining be completely excluded from this Phase 2 trailer program. The agencies believe that the operational capabilities of trailers designed for these purposes could be compromised by the use of aerodynamic devices or tires with lower rolling resistance. Additionally, the agencies are proposing to exclude trailers designed for heavy-haul applications and those that are not intended for highway use, as follows:

- Trailers shorter than 35 feet in length with three axles, and all trailers with four or more axles (including any lift axles)
- Trailers designed to operate at low speeds such that they are unsuitable for normal highway operation
- Trailers designed to perform their primary function while stationary
- Trailers intended for temporary or permanent residence, office space, or other work space, such as campers, mobile homes, and carnival trailers
- Trailers designed to transport livestock
- Incomplete trailers that are sold to a secondary manufacturer for modification to serve a purpose other than transporting freight, such as for offices or storage<sup>217</sup>

Where the criteria for exclusion identified above may be unclear for

specific trailer models, manufacturers would be encouraged to ask the agencies to make a determination before production begins. The agencies seek comments on these and any other trailer characteristics that might make the trailers incompatible with highway use or would restrict their typical operating speeds.

Because the agencies are proposing that these trailers be excluded from the program, we are not proposing to require manufacturers to report to the agencies about these excluded trailers. We seek comments on whether, in lieu of the exclusion of trailers from the program, the agencies should instead exempt these trailers from the standards, but still require reporting to the agencies in order to verify that a manufacturer qualifies for an exemption. In that case, exempt trailers would have some regulatory requirements (e.g., reporting); again, excluded trailers would have no regulatory requirements under this proposal. All other trailers would remain covered by the proposed standards.

As described earlier, the proposed program is based on the expectation that manufacturers would be able to apply aerodynamic devices and tire technologies to the vast majority of box trailers, and these standards would be relatively stringent. We propose to categorize trailers with functional components or work-performing equipment, and trailers with certain design elements, that could partially interfere with the installation or the effectiveness of some aerodynamic technologies, as “partial-aero” box trailers. For example, some trailer equipment by their placement or their need for operator access might not be compatible with current designs of trailer skirts, but a boat tail could be effective on that trailer in the early years of the program. Similarly, a rear lift gate or roll-up rear door might not be compatible with a current boat tail design, but skirts could be effective. The proposed requirements for these trailers would be the same as their full-aero counterparts until MY 2027, at which time they would continue to be subject to the MY 2024 standards. See 40 CFR 1037.107.

For trailers for which no aerodynamic devices are practical, the agencies are proposing design standards requiring LRR tires and ATI systems. Trailers for which neither skirt/under-body devices nor rear-end devices would be likely to be feasible fall into two categories: non-box trailers and non-aero box trailers. We believe that there is limited availability of aerodynamic technologies

for non-box trailers (for example, platform (flatbed) trailers, tank trailers, and container chassis trailers). Also, for container chassis trailers, operational considerations, such as stacking of the chassis trailers, impede introduction of aerodynamic technologies. In addition, manufacturers of these trailer types have little or no experience with aerodynamic technologies designed for their products. Non-aero box trailers, defined as those with equipment or design features that would preclude both skirt/under-body and rear-end aerodynamic technologies (e.g., a trailer with both a pull-out platform for side access and a rear lift gate), would be subject to the same tire-only design standards as would non-box trailers, based exclusively on the performance of tire and ATI technologies.<sup>218</sup>

We recognize that the shortest short box vans (i.e., less than 35 feet) are often pulled in tandem. Since these trailers make up the majority of trailers in the short box van subcategories, we are not proposing standards for short box dry and refrigerated vans based on the use of rear devices. Thus, work-performing features on the rear of the trailer (e.g., lift gates) would not impact a trailer's ability to meet the full-aero short-box trailer standards. As a result, we are proposing that all short box vans only be categorized as partial-aero vans if they have work-performing side features (e.g., belly boxes). We expect that partial-aero short dry van trailers would be able to adopt front-side devices that would achieve the reduced standards. Furthermore, some short box trailers that are not operated in tandem, such as 40- or 48-foot trailers, could also be able to adopt rear-side devices and achieve even greater reductions.

Refrigerated short box vans are a special case in that they have TRUs that limit the ability to apply aerodynamic technologies to the front side of the trailers. Because of this, we are proposing to classify the shortest refrigerated box vans (shorter than 35 feet) as non-aero trailers if they are designed with work-performing side features. Since these trailers may be pulled in tandem and since they cannot adopt front-side aerodynamic devices, we propose that they meet standards predicated on tire technologies only. Short box refrigerated trailers 35 feet and longer would only qualify for non-aero standards if they have work-

<sup>217</sup> Secondary manufacturers who purchase incomplete trailers and complete their construction to serve as trailers are subject to the requirements of 40 CFR 1037.620.

<sup>218</sup> The agencies are not aware of work-performing equipment that would prevent the use of gap-reducing trailer devices on dry vans of any length; thus dry vans with side and rear equipment could qualify as “non-aero” trailers, even if the manufacturer could install a gap-reducing device.

performing devices on both the side *and* rear of the trailer. See 40 CFR 1037.107.

We request comment on these proposed provisions for excluding some trailers from the program, including speed restrictions and physical characteristics that would generally make them incompatible for highway use. We also request comment on the proposed approach of applying less-stringent standards to non-box, non-aero box, and partial-aero box trailers.

#### (6) In-Use Standards

Consistent with Section 202(a)(1) of the CAA, EPA is proposing that the emissions standards apply for the useful life of the trailers. NHTSA also proposes to adopt EPA's useful life requirements for trailers to ensure manufacturers consider in the design process the need for fuel efficiency standards to apply for the same duration and mileage as EPA standards. Aerodynamic devices available today, including trailer skirts, rear fairings, under-body devices, and gap-reducing fairings, are designed to maintain their physical integrity for the life of the trailer. In the absence of failures like detachment, breakage, or misalignment, we expect that the aerodynamic performance of the devices will not degrade appreciably over time and that the projected CO<sub>2</sub> and fuel consumption reductions will continue for the life of the vehicle with no special maintenance requirements. Because of this, EPA does not see a benefit to establishing separate standards that would apply in-use for trailers. EPA and NHTSA are proposing a regulatory useful life value for trailers of 10 years, and thus the certification standards would apply in-use for that period of time.<sup>219</sup> See Section IV. F. (5) (a) for a discussion of other factors related to trailer useful life.

#### *D. Feasibility of the Proposed Trailer Standards*

As discussed below, the agencies' initial determination, subject to consideration of public comment, is that the standards presented in the Section IV.C.2, are the maximum feasible and appropriate under the agencies' respective authorities, considering lead time, cost, and other factors. We summarize our analyses in this section, and describe them in more detail in the Draft RIA (Chapter 2.10).

Our analysis of the feasibility of the proposed CO<sub>2</sub> and fuel consumption standards is based on technology cost and effectiveness values collected from

several sources. Our assessment of the proposed trailer program is based on information from:

- Southwest Research Institute evaluation of heavy-duty vehicle fuel efficiency and costs for NHTSA,<sup>220</sup>
- 2010 National Academy of Sciences report of Technologies and Approaches to Reducing the Fuel Consumption of Medium- and Heavy-Duty Vehicles,<sup>221</sup>
- TIAX's assessment of technologies to support the NAS panel report,<sup>222</sup>
- The analysis conducted by the Northeast States Center for a Clean Air Future, International Council on Clean Transportation, Southwest Research Institute and TIAX for reducing fuel consumption of heavy-duty long haul combination tractors (the NESCCAF/ICCT study),<sup>223</sup>
- The technology cost analysis conducted by ICF for EPA,<sup>224</sup> and
- Testing conducted by EPA.

As an initial step in our analysis, we identified the extent to which fuel consumption- and CO<sub>2</sub>-reducing technologies are in use today.

The technologies include those that reduce aerodynamic drag at the front, back, and underside of trailers, tires with lower rolling resistance, tire inflation technologies, and weight reduction through component substitution. It should be noted that the agencies need not and did not attempt to predict the exact future pathway of the industry's response to the new standards, but rather demonstrated one example of how compliance could reasonably occur, taking into account cost of the standards (including costs of compliance testing and certification), and needed lead time. We are proposing that full-aero box trailer manufacturers

have additional flexibility in meeting the standards through averaging. The less complex standards proposed for partial- and non-aero box and non-box trailers would still provide a degree of technology choices that would meet their standards.

For our feasibility analysis, we identified a set of technologies to represent the range of those likely to be used in the time frame of the rule. We then combined these technologies into packages of increasing effectiveness in reducing CO<sub>2</sub> and fuel consumption and projected reasonable rates at which the evaluated technologies and packages could be adopted across the trailer industry. More details regarding our analysis can be found in Chapter 2.10.4.1 of the draft RIA.

The agencies developed the proposed CO<sub>2</sub> and fuel consumption standards for each stage of the program by combining the projected effectiveness of trailer technologies and the projected adoption rates for each trailer type. We evaluated these standards with respect to the cost of these technologies, the emission reductions and fuel consumption improvements achieved, and the lead-time needed to deploy the technology at a given adoption rate.

Unlike the other sectors covered by this Phase 2 rulemaking, trailer manufacturers do not have experience certifying under the Phase 1 program. Moreover, a large fraction of the trailer industry is composed of small businesses and very few of the largest trailer manufacturers have the same resources available as manufacturers in the other heavy-duty sectors. The standards have been developed with this in mind, and we are confident the proposed standards can be achieved by manufacturers who lack prior experience implementing such standards.

#### (1) Available Technologies

Trailer manufacturers can design a trailer to reduce fuel consumption and CO<sub>2</sub> emissions by addressing the trailer's aerodynamic drag, tire rolling resistance and weight. In this section we outline the general trailer technologies that the agencies considered in evaluating the feasibility of the proposed standards.

##### (a) Aerodynamic Drag Reduction

Historically, the primary goal when designing the shape of box trailers has been to maximize usable internal cargo volume, while complying with regulatory size limits and minimizing construction costs. This led to standard box trailers being rectangular. This basic shape creates significant aerodynamic

<sup>220</sup> Reinhart, T.E. (June 2015). Commercial Medium- and Heavy-Duty Truck Fuel Efficiency Technology Study—Report #1. (Report No. DOT HS 812 146). Washington, DC: National Highway Traffic Safety Administration.

<sup>221</sup> Committee to Assess Fuel Economy Technologies for Medium- and Heavy-Duty Vehicles; National Research Council; Transportation Research Board (2010). Technologies and Approaches to Reducing the Fuel Consumption of Medium- and Heavy-Duty Vehicles. ("The NAS Report") Washington, DC, The National Academies Press. Available electronically from the National Academy Press Web site at [http://www.nap.edu/catalog.php?record\\_id=12845](http://www.nap.edu/catalog.php?record_id=12845).

<sup>222</sup> TIAX, LLC. "Assessment of Fuel Economy Technologies for Medium- and Heavy-Duty Vehicles," Final Report to National Academy of Sciences, November 19, 2009.

<sup>223</sup> NESCCAF, ICCT, Southwest Research Institute, and TIAX. Reducing Heavy-Duty Long Haul Combination Truck Fuel Consumption and CO<sub>2</sub> Emissions. October 2009.

<sup>224</sup> ICF International. "Investigation of Costs for Strategies to Reduce Greenhouse Gas Emissions for Heavy-Duty On-Road Vehicles." July 2010. Docket Number EPA-HQ-OAR-2010-0162-0283.

<sup>219</sup> EPA may perform in-use testing of any vehicle subject to the standards of this part, including trailers. For example, we may test trailers to verify drag areas or other GEM inputs.

drag and makes box trailers strong candidates for aerodynamic improvements. Current bolt-on aerodynamic technologies for box trailers are designed to create a smooth transition of airflow from the tractor, around the trailer, and beyond the trailer.

Table IV–3 lists general aerodynamic technologies that the EPA SmartWay program has evaluated for use on box trailers and a description of their intended impact. Several versions of each of these technologies are commercially available and have seen increased adoption over the past

decade. Performance of these devices varies based on their design, their location and orientation on the trailer, and the vehicle speed. More information regarding the agencies' initial assessment of these devices, including incremental costs is discussed in Chapter 2.10 of the draft RIA.

TABLE IV–3—AERODYNAMIC TECHNOLOGIES FOR BOX TRAILERS

Location on trailer	Example technologies	Intended impact on aerodynamics
Front .....	Front fairings and gap-reducing fairings .....	Reduce cross-flow through gap and smoothly transition airflow from tractor to the trailer.
Rear .....	Rear fairings, boat tails and flow diffusers .....	Reduce pressure drag induced by the trailer wake.
Underside .....	Side fairings and skirts, and underbody devices .....	Manage flow of air under the trailer to reduce turbulence, eddies and wake.

As mentioned previously, SmartWay-verified technologies are evaluated on 53-foot dry vans. However, the CO<sub>2</sub>- and fuel consumption-reducing potential of some aerodynamic technologies demonstrated on 53-foot dry vans can be translated to refrigerated vans and box trailers in lengths different than 53 feet and some fleets have opted to add trailer skirts to their refrigerated vans and 28-foot trailers (often called “pups”). In addition, some side skirts have been adapted for non-box trailers (e.g., tankers, platforms, and container chassis), and have shown potential for large reductions in drag. At this time, however, non-box trailer aerodynamic devices are not widely available, with many still at the prototype stage. The agencies encourage commenters to provide more information and data related to the effectiveness of technologies applied to trailers other than 53-foot dry and refrigerated vans.

“Boat tail” devices, applied to the rear of a trailer, are typically designed to collapse flat as the trailer rear doors are opened. If the tail structure can remain in the collapsed configuration when the doors are closed, the benefit of the device is lost. The agencies request comment on whether we should require that trailer manufacturers using such devices for compliance with the proposed standards only use designs that automatically deploy when the vehicle is in motion.

The agencies are aware that physical characteristics of some box trailers influence the technologies that can be applied. For instance, the TRUs on refrigerated vans are located at the front of the trailer, which prohibits the use of current gap-reducers. Similarly, drop deck dry vans have lowered floors between the landing gear and the trailer axles that limit the ability to use side skirts. The agencies considered the availability and limitations of

aerodynamic technologies for each trailer type evaluated in our feasibility analysis of the proposed and alternative standards.

#### (b) Tire Rolling Resistance

On a typical Class 8 long-haul tractor-trailer, over 40 percent of the total energy loss from tires is attributed to rolling resistance from the *trailer* tires.<sup>225</sup> Trailer tire rolling resistance values collected by the agencies for Phase 1 indicate that the average coefficient of rolling resistance ( $C_{RR}$ ) for new trailer tires was 6.0 kg/ton. This value was applied for the standard trailer used for tractor compliance in the Phase 1 tractor program. For Phase 2, the agencies consider all trailer tires with  $C_{RR}$  values below 6.0 kg/ton to be “lower rolling resistance” (LRR) tires. For reference, a trailer tire that qualifies as a SmartWay-verified tire must meet a  $C_{RR}$  value of 5.1 kg/ton, a 15 percent  $C_{RR}$  reduction from the trailer tire identified in Phase 1. Our research of rolling resistance indicates an additional  $C_{RR}$  reduction of 15 percent or more from the SmartWay verification threshold is possible with tires that are available in the commercial market today.

For this proposal, the agencies are proposing to use the same rolling resistance baseline value of 6.0 kg/ton for all trailer subcategories. We request comment on the appropriateness of 6.0 kg/ton as the proposed  $C_{RR}$  threshold for all regulated trailers. Specifically, the agencies would like more information on current adoption rates of and  $C_{RR}$  values for models of LRR tires currently in use on short box trailers and the various non-box trailers.

<sup>225</sup> “Tires & Truck Fuel Economy: A New Perspective”, The Tire Topic Magazine, Special Edition Four, 2008, Bridgestone Firestone, North American Tire, LLC. Available online: [http://www.trucktires.com/bridgestone/us\\_eng/brochures/pdf/08-Tires\\_and\\_Truck\\_Fuel\\_Economy.pdf](http://www.trucktires.com/bridgestone/us_eng/brochures/pdf/08-Tires_and_Truck_Fuel_Economy.pdf).

Similar to the case of tractor tires, LRR tires are available as either dual or as single wide-based tires for trailers. Single wide-based tires achieve  $C_{RR}$  values that are similar to their dual counterparts, but have an added benefit of weight reduction, which can be an attractive option for trailers that frequently maximize cargo weight. See Section IV.D.1.d below.

#### (c) Tire Pressure Systems

The inflation pressure of tires also impacts the rolling resistance. Tractor-trailers operating with all tires under-inflated by 10 psi have been shown to increase fuel consumed by up to 1 percent.<sup>226</sup> Tires can gradually lose pressure from small punctures, leaky valves or simply diffusion through the tire casing. Changes in ambient temperature can also have an effect on tire pressure. Trailers that remain unused for long periods of time between hauls may experience any of these conditions. A 2003 FMCSA report found that nearly 1 in 5 trailers had at least 1 tire under-inflated by 20 psi or more. If drivers or fleets are not diligent about checking and attending to under-inflated tires, the trailer may have much higher rolling resistance and much higher CO<sub>2</sub> emissions and fuel consumption.

Tire pressure monitoring (TPM) and automatic tire inflation (ATI) systems are designed to address under-inflated tires. Both systems alert drivers if a tire's pressure drops below its set point. TPM systems are simpler and merely monitor tire pressure. Thus, they require user-interaction to re inflate to the appropriate pressure. Today's ATI systems, on the other hand, typically

<sup>226</sup> “Tire Pressure Systems—Confidence Report”. North American Council for Freight Efficiency. 2013. Available online: <http://nacfe.org/wp-content/uploads/2014/01/TPS-Detailed-Confidence-Report1.pdf>.

take advantage of trailers' air brake systems to supply air back into the tires (continuously or on demand) until a selected pressure is achieved. In the event of a slow leak, ATI systems have the added benefit of maintaining enough pressure to allow the driver to get to a safe stopping area. The agencies believe TPM systems cannot sufficiently guarantee the proper inflation of tires due to the inherent user-interaction required. Therefore, ATI systems are the only pressure systems the agencies are proposing to recognize in Phase 2.

Benefits of ATI systems in individual trailers vary depending on the base level of maintenance already performed by the driver or fleet, as well as the number of miles the trailer travels. Trailers that are well maintained or that travel fewer miles will experience less benefits from ATI systems compared to trailers that often drive with poorly inflated tires or log many miles. The agencies believe ATI systems can provide a CO<sub>2</sub> and fuel consumption benefit to most trailers. With ATI use, trailers that have lower annual vehicle miles traveled (VMT) due to long periods between uses would be less susceptible to low tire pressures when they resume activity. Trailers with high annual VMT would experience the fuel savings associated with consistent tire pressures. Automatic tire inflation systems could provide a CO<sub>2</sub> and fuel consumption savings of 0.5–2.0 percent, depending on the degree of under-inflation in the trailer system. See Section IV.D.3.d below for discussion of our estimates of these factors, as well as estimates of the degree of adoption of ATI systems prior to and at various points in the phase-in of the proposed program.

The use of ATI systems can result in cost savings beyond reducing fuel costs. For example, drivers and fleets that diligently maintain their tires would spend less time and money to inspect each tire. A 2011 FMCSA estimated under-inflation accounts for one service call per year and increases tire procurement costs 10 to 13 percent. The study found that total operating costs can increase by \$600 to \$800 per year due to under-inflation.<sup>227</sup>

#### (d) Weight Reduction

Reduction in trailer tare (*i.e.*, empty) weight can lead to fuel efficiency reductions in two ways. For applications where payload is not limited by weight restrictions, the overall weight of the tractor and trailer would be reduced and would lead to

improved fuel efficiency. For applications where payload is limited by weight restrictions, the lower trailer weight would allow additional payload to be transported during the truck's trip, so emissions and fuel consumption on a ton-mile basis would decrease. There are weight reduction opportunities for trailers in both the structural components and in the wheels/tires. Material substitution (*e.g.*, replacing steel with aluminum or lighter-weight composites) is feasible for components such as roof bows, side and corner posts, cross members, floor joists, floors, and van sidewalls. Similar material substitution is feasible for wheels (*e.g.*, substituting aluminum for steel). Weight can also be reduced through the use of single wide-based tires replacing two dual tires.

Lower weight is a desired trailer attribute for many customers, and most trailer manufacturers offer options that reduce weight to some degree. Some of these manufacturers, especially box van makers, market trailers with lower-weight major components, such as light-weight composite van sidewalls or aluminum floors, especially to customers that expect to frequently reach regulatory weight limits (*i.e.*, "weigh out") and are willing to pay a premium for the ability to increase cargo weight without exceeding overall vehicle weight. Alternatively, manufacturers that primarily design trailers for customers that do not have weight limit concerns (*i.e.*, their payloads frequently fill the available trailer cargo space before the weight limit is reached, or "cube out"), or for customers that have smaller budgets, may continue to design trailers based on traditional, heavier materials, such as wood and steel.

There is no clear "baseline" for current trailer weight against which lower-weight designs could be compared for regulatory purposes. For this reason, the agencies do not believe it would be appropriate or fair across the industry to apply overall weight reductions toward compliance. However, the agencies do believe it would be appropriate to allow a manufacturer to account for weight reductions that involve substituting very specific, traditionally heavier components with lower-weight options that are not currently widely adopted in the industry. We discuss how we apply weight reduction in developing the standards in Section IV. D. (2)(d) below.

#### (2) Technological Basis of the Standards

The analysis below presents one possible set of technology designs by which trailer manufacturers could

reasonably achieve the goals of the program on average. However, in practice, trailer manufacturers could choose different technologies, versions of technologies, and combinations of technologies that meet the business needs of their customers while complying with this proposed program.

Much of our analysis is performed for box trailers, which have the most stringent proposed standards. As mentioned previously, we have separate standards for short and long box vans, and a trailer length of 50 feet is proposed as the cut-point to distinguish the two length categories. For the purpose of this analysis, long trailers are represented by 53-foot vans and short trailers are represented by single, 28-foot ("pup") vans. These trailer lengths make up the largest fraction of the vans in the two categories. The agencies recognize that many 28-foot short vans are operated in tandem. However, these trailers are sold individually, and require a "dolly", often sold by a separate manufacturer, to connect the trailers for tandem operation.

In addition, the other trailer types considered short vans in this proposal (*e.g.*, 40-foot and 48-foot) typically operate as single trailers. To minimize complexity, we are proposing that 28-foot trailers represent all short refrigerated and dry vans for both compliance and for this feasibility analysis. This means that manufacturers would not need to perform tests (or report device manufacturers' test data) of the performance of devices for each trailer length in the short van category. Although this approach would provide a conservative estimate of actual CO<sub>2</sub> emissions and fuel consumption reductions for the short van category, the agencies believe that the need to avoid an overly complex compliance program justifies this approach. We request comment on this approach to evaluating short box trailers.

#### (a) Aerodynamic Packages

In order to evaluate performance and cost of the aerodynamic technologies discussed in the previous section, the agencies identified "packages" of individual or combined technologies that are being sold today on box trailers. The agencies also identified distinct performance levels (*i.e.*, bins) for these technologies based on EPA's aerodynamic testing. The agencies recognize that there are other technology options that have similar performance. We chose the technologies presented here based on their current adoption rates and effectiveness in reducing CO<sub>2</sub> and fuel consumption.

<sup>227</sup> TMC Future Truck Committee Presentation "FMCSA Tire Pressure Monitoring Field Operational Test Results," February 8, 2011.



Bin I represents a base trailer with no aerodynamic technologies added. There is no cost associated with this bin. Bin II achieves small reductions in CO<sub>2</sub> and fuel consumption. This bin includes a gap reducing fairing added to a long dry van or a skirt added to a solo short dry van.<sup>228</sup> Bin III includes devices that would achieve SmartWay's verification threshold of four percent at cruise speeds. Some basic skirts and boat tails would achieve these levels of reductions for long box trailers. A gap reducer and a basic skirt on a short dry van would meet this level of performance. Bin IV technologies are more effective, single aerodynamic devices for long box trailers, including advanced skirts or boat tails, that achieve larger reductions in drag than the technologies in Bin III. The combination of an advanced skirt and gap reducer on a short dry van are also expected to achieve this bin.

Bin V levels of performance were not observed in EPA's aerodynamic testing for short box trailers. It is possible that a gap reducer, skirt, and boat tail could achieve this performance, but boat tails are not feasible for 28-foot trailers operated in tandem unless the trailer is located in the rear position. For this analysis, the agencies only evaluated solo pup trailers and, therefore, did not evaluate any technologies for short box trailers beyond Bin IV. For this proposed rulemaking, we believe a Bin V level of performance can be achieved for long box trailers by either highly effective single devices or by applying a

combination of basic boat tails and skirts. We do not currently have data for a single aerodynamic device that fits this bin and we evaluated it as a combination of a basic tail and skirt. Bin VI combines advanced skirts and boat tail technologies on long box trailers. This bin is expected to include many technologies that qualify for SmartWay's "Elite" designation.

Bin VII represents an optimized system of technologies that work together to synergistically address each of the main areas of drag and achieves aerodynamic improvements greater than SmartWay's "Elite" designation. We are representing Bin VII with a gap reducer, and advanced tail and skirt. Bin VIII is designed to represent aerodynamic technologies that may become available in the future, including aerodynamic devices yet to be designed or approaches that would incorporate changes to the construction of trailer bodies. We have not analyzed this final bin in terms of effectiveness or cost, but are including it to account for future advancements in trailer aerodynamics.

For this proposal, aerodynamic performance is evaluated using a vehicle's aerodynamic drag area, C<sub>D</sub>A. EPA collected aerodynamic test data for several tractor-trailer configurations, including 53-foot dry vans and 28-foot dry van trailers with many of these technology packages. The agencies developed bins, somewhat similar to the aerodynamic bins in the Phase 1 and proposed Phase 2 tractor programs,

based on results from our test program. However, unlike the tractor program, we grouped the technologies by changes in C<sub>D</sub>A (or "delta C<sub>D</sub>A") rather than by absolute values. In other words, each bin would comprise aerodynamic technologies that provide similar improvements in drag. This delta C<sub>D</sub>A classification methodology, which measures *improvement* in performance relative to a baseline, is similar to the SmartWay technology verification program with which most trailer manufacturers are familiar.

Table IV-4 illustrates the bin structure that the agencies are proposing as the basis for compliance. The table shows example technology packages that might be included in each bin based on EPA's testing of 53-foot dry vans and solo 28-foot dry vans. The agencies believe these bins apply to other box trailers (refrigerated vans and lengths other than 28 and 53 feet), which will be described in more detail in Section IV.D.3.b. These bins cover a wide enough range of delta C<sub>D</sub>As to account for the uncertainty seen in EPA's aerodynamic testing program due to procedure variability, the use of different test methods, or different models of tractors, trailers and devices. A more detailed description of the development of these bins can be found in the draft RIA, Chapter 2.10. We welcome comments and additional data that may support or suggest changes to these bins.

TABLE IV-4—TECHNOLOGY BINS USED TO EVALUATE TRAILER BENEFITS AND COSTS

Bin	Delta C <sub>D</sub> A	Average delta C <sub>D</sub> A	Example technologies	
			53-foot dry van	28-foot dry van
Bin I .....	< 0.09	0.0	No Aero Devices .....	No Aero Devices.
Bin II .....	0.10–0.19	0.1	Gap Reducer .....	Skirt.
Bin III .....	0.20–0.39	0.3	Basic Skirt or Basic Tail .....	Skirt + Gap Reducer.
Bin IV .....	0.40–0.59	0.5	Advanced Skirt or Tail .....	Adv. Skirt + Gap Reducer.
Bin V .....	0.60–0.79	0.7	Basic Combinations.	
Bin VI .....	0.80–1.19	1.0	Advanced Combinations (including SmartWay Elite).	
Bin VII .....	1.20–1.59	1.4	Optimized Combinations.	
Bin VIII .....	> 1.6	1.8	Changes to Trailer Construction.	

**Note:** A blank cell indicates a zero or NA value in this table.

The agencies used EPA's Greenhouse gas Emissions Model (GEM) vehicle simulation tool to conduct this analysis. See Section F.1 below for more about GEM. Within GEM, the aerodynamic performance of each trailer subcategory is evaluated by subtracting the delta C<sub>D</sub>A shown in Table IV-4 from the C<sub>D</sub>A

value representing a specific standard tractor pulling a zero-technology trailer. The agencies chose to model the zero-technology long box dry van using a C<sub>D</sub>A value of 6.2 m<sup>2</sup> (the average C<sub>D</sub>A from EPA's coastdown testing). For long box refrigerated vans, a two percent reduction in C<sub>D</sub>A was assumed to

account for the aerodynamic benefit of the TRU at the front of the trailer. Short box dry vans also received a two percent lower C<sub>D</sub>A value compared to its 53-foot counterpart, consistent with the reduction observed in EPA's wind tunnel testing. The C<sub>D</sub>A value assigned to the refrigerated short box vans was an

<sup>228</sup> The agencies recognize that many 28-foot pup trailers are often operated in tandem. However, we are regulating and evaluating short dry vans as solo

trailers since they are sold individually and the short box regulatory subcategories also include

trailer sizes not often operated in tandem (e.g., 40-foot and 48-foot trailers).



additional two percent lower than the short box dry van. Non-aero box trailers are modeled as short box dry vans. The trailer subcategories that have design standards (*i.e.*, non-box and non-aero box trailers) do not have numerical standards to meet, but they were evaluated in this feasibility analysis in order to quantify the benefits of including them in the program. Non-aero box trailers are modeled as short dry vans. Non-box trailers, which are modeled as flatbed trailers, were assigned a drag area of 4.9 m<sup>2</sup>, as was done in the Phase 1 tractor program for low roof day cabs. Table IV–5 illustrates the Bin I drag areas ( $C_D A$ ) associated with each trailer subcategory.

**TABLE IV–5—BASELINE  $C_D A$  VALUES ASSOCIATED WITH AERODYNAMIC BIN I [Zero trailer technologies]**

Trailer subcategory	Dry van
Long Dry Van .....	6.2
Short Dry Van .....	6.1
Long Ref. Van .....	6.1
Short Ref. Van .....	6.0
Non-Aero Box .....	6.1
Non-Box .....	4.9

#### (b) Tire Rolling Resistance

Similar to the proposed Phase 2 tractor and vocational vehicle programs, the agencies are proposing a tire program based on adoption of lower rolling resistance tires. Feedback from several box trailer manufacturers indicates that the standard tires offered on their new trailers are SmartWay-verified tires (*i.e.*,  $C_{RR}$  of 5.1 kg/ton or better). An informal survey of members from the Truck Trailer Manufacturers Association (TTMA) indicates about 35 percent of box trailers sold today have SmartWay tires.<sup>229</sup> While some trailers continue to be sold with tires of higher rolling resistances, the agencies believe most box trailer tires currently achieve the Phase 1 trailer tire  $C_{RR}$  of 6.0 kg/ton or better.

The agencies evaluated two levels of tire performance for this proposal beyond the baseline trailer tire rolling resistance level (TRRL) of 6.0 kg/ton. The first performance level was set at the criteria for SmartWay-verification for trailer tires, 5.1 kg/ton, which is a 15 percent reduction in  $C_{RR}$  from the baseline. As mentioned previously, several tire models available today achieve rolling resistance values well below the present SmartWay threshold. Given the multiple year phase-in of the

standards, the agencies expect that tire manufacturers will continue to respond to demand for more efficient tires and will offer increasing numbers of tire models with rolling resistance values significantly better than today's typical LRR tires. In this context, we believe it is reasonable to expect a large fraction of the trailer industry could adopt tires with rolling resistances at a second performance level that would achieve an additional eight percent reduction in rolling resistance (a 22 percent reduction from the baseline tire), especially in the later stages of the program. The agencies project the  $C_{RR}$  for this second level of performance to be a value of 4.7 kg/ton.

The agencies evaluated these three tire rolling resistance levels, summarized in Table IV–6, in the feasibility analysis of the following sections. GEM simulations that apply Level 1 and 2 tires result in CO<sub>2</sub> and fuel consumption reductions of two and three percent from the baseline tire, respectively. It should be noted that these levels are for the feasibility analysis only. For compliance, manufacturers would have the option to use tires with any rolling resistance and would not be limited to these TRRLs.

**TABLE IV–6—SUMMARY OF TRAILER TIRE ROLLING RESISTANCE LEVELS EVALUATED**

Tire rolling resistance level	$C_{RR}$ (kg/ton)
Baseline .....	6.0
Level 1 .....	5.1
Level 2 .....	4.7

#### (c) Automatic Tire Inflation Systems

NHTSA and EPA recognize the role of proper tire inflation in maintaining optimum tire rolling resistance during normal trailer operation. For this proposal, rather than require performance testing of ATI systems, the agencies are proposing to recognize the benefits of ATI systems with a single default reduction for manufacturers that incorporate ATI systems into their trailer designs. Based on information available today, we believe that there is a narrow range of performance among technologies available and among systems in typical use. We propose to assign a 1.5 percent reduction in CO<sub>2</sub> and fuel consumption for all trailers that implement ATI systems, based on information available today.<sup>230</sup> We believe the use of these systems can consistently ensure that tire pressure and tire rolling resistance are

maintained. We selected the levels of the proposed trailer standards with the expectation that a high rate of adoption of ATI systems would occur across all on-highway trailers and during all years of the phase-in of the program. See Section IV.D.3.d below for discussion of our estimates of these factors, as well as estimates of the degree of adoption of ATI systems prior to and at various points in the phase-in of the proposed program. The informal survey of members from the Truck Trailer Manufacturers Association (TTMA) indicates about 40 percent of box trailers sold today have ATI systems.<sup>231</sup>

#### (d) Weight Reduction

The agencies are proposing compliance provisions that would limit the weight-reduction options to the substitution of specified components that can be clearly isolated from the trailer as a whole. For this proposal, the agencies have identified several conventional components with available lighter-weight substitutes (*e.g.*, substituting conventional dual tires mounted on steel wheels with wide-based single tires mounted on aluminum wheels). We are proposing values for the associated weight-related savings that would be applied with these substitutions for compliance. The proposed component substitutions and their associated weight savings are presented in the draft RIA, Chapter 2.10.2.4 and in proposed 40 CFR 1037.515. We believe that the initial cost of these component substitutions is currently substantial enough that only a relatively small segment of the industry has adopted these technologies today.

The agencies recognize that when weight reduction is applied to a trailer, some operators will replace that saved weight with additional payload. To account for this in EPA's GEM vehicle simulation tool, it is assumed that one-third of the weight reduction will be applied to the payload. For tractor-trailers simulated in GEM, it takes a weight reduction of nearly 1,000 lbs before a one percent fuel savings is achieved. The component substitutions identified by the agencies result in weight reductions of less than 500 lbs, yet can cost over \$1,000. The agencies believe that few trailer manufacturers would apply weight reduction solely as a means of achieving reduced fuel consumption and CO<sub>2</sub> emissions. Therefore, we are proposing standards that could be met without reducing weight—that is, the compliance path set

<sup>229</sup> Truck Trailer Manufacturers Association letter to EPA. Received on October 16, 2014. Docket EPA–HQ–OAR–2014–0827.

<sup>230</sup> See the Chapter 2.10.2.3 of the draft RIA.

<sup>231</sup> Truck Trailer Manufacturers Association letter to EPA. Received on October 16, 2014. Docket EPA–HQ–OAR–2014–0827.

out by the agencies for the proposed standards does not include weight reduction. However, we are proposing to offer weight reduction as an option for box trailer manufacturers who wish to apply it to some of their trailers as part of their compliance strategy.

The agencies have identified 11 common trailer components that have lighter weight options available (see 40 CFR 1037.515)<sup>232 233 234 235</sup> Manufacturers that adopt these technologies would sum the associated weight reductions and apply those values in GEM. As mentioned previously, we are restricting the weight reduction options to those listed in 40 CFR 1037.515. We are requesting comment on the appropriateness of the specified weight reductions from component substitution. In addition, we seek weight and cost data regarding additional components that could be offered as specific weight reduction options. The agencies request that any such components be applicable to most box trailers, and that the reduced weight option not currently be in common use.

### (3) Effectiveness, Adoption Rates, and Costs of Technologies for the Proposed Standards

The agencies evaluated the technologies above as they apply to each of the trailer subcategories. The next sections describe the effectiveness, adoption rates and costs associated with these technologies. The effectiveness and adoption rates are then used to derive the proposed standards.

#### (a) Zero-Technology Baseline Tractor-Trailer Vehicles

The regulatory purpose of EPA's heavy-duty vehicle compliance tool, GEM, is to combine the effects of trailer technologies through simulation so that they can be expressed as g/ton-mile and gal/1000 ton-mile and thus avoid the need for direct testing of each trailer model being certified. The proposed trailer program has separate standards for each trailer subcategory, and a unique tractor-trailer vehicle was chosen to represent each subcategory for compliance. In the Phase 2 update to GEM, each trailer subcategory is modeled as a particular trailer being pulled by a standard tractor depending on the physical characteristics and use pattern of the trailer. Table IV–7

highlights the relevant vehicle characteristics for the zero-technology baseline of each subcategory. Baseline trailer tires are used, and the drag area, which is a function of the aerodynamic characteristics of both the tractor and trailer, is set to the Bin I values shown previously in Table IV–5. Weight reduction and ATI systems are not applied in these baselines. Chapter 2.10 of the draft RIA provides a detailed description of the development of these baseline tractor-trailers.

The agencies chose to consistently model a Class 8 tractor across all trailer subcategories. We recognize that Class 7 tractors are sometimes used in certain applications. However, we believe Class 8 tractors are more widely available, which will make it easier for trailer manufacturers to obtain a qualified tractor if they choose to perform trailer testing. We request comment on the use of Class 8 tractors as part of the tractor-trailer vehicles used in the compliance simulation as well as performance testing. We ask that commenters include data, where available, related to the current use and availability of Class 7 and 8 tractors with respect to the trailer types in each trailer subcategory.

TABLE IV—7 CHARACTERISTICS OF THE ZERO-TECHNOLOGY BASELINE TRACTOR-TRAILER VEHICLES

	Dry van		Refrigerated van		Non-aero box	Non-box
Trailer Length .....	Long .....	Short .....	Long .....	Short .....	All Lengths .....	All Lengths
Tractor Class .....	Class 8 .....	Class 8 .....	Class 8 .....	Class 8 .....	Class 8 .....	Class 8
Tractor Cab Type .....	Sleeper .....	Day .....	Sleeper .....	Day .....	Day .....	Day
Tractor Roof Height .....	High .....	High .....	High .....	High .....	High .....	Low
Engine .....	2018 MY 15L, ..	2018 MY 15L, ..	2018 MY 15L, ..	2018 MY 15L, ..	2018 MY 15L, ..	2018 MY 15L,
	455 HP .....	455 HP .....	455 HP .....	455 HP .....	455 HP .....	455 HP
Frontal Area (m <sup>2</sup> ) .....	10.4 .....	10.4 .....	10.4 .....	10.4 .....	10.4 .....	6.9
Drag Area, C <sub>D</sub> A (m <sup>2</sup> ) .....	6.2 .....	6.1 .....	6.1 .....	6.0 .....	6.1 .....	4.9
Steer Tire RR (kg/ton) .....	6.54 .....	6.54 .....	6.54 .....	6.54 .....	6.54 .....	6.54
Drive Tire RR (kg/ton) .....	6.92 .....	6.92 .....	6.92 .....	6.92 .....	6.92 .....	6.92
Trailer Tire RR (kg/ton) .....	6.00 .....	6.00 .....	6.00 .....	6.00 .....	6.00 .....	6.00
Total Weight (kg) .....	31,978 .....	21,028 .....	33,778 .....	22,828 .....	21,028 .....	29,710
Payload (tons) .....	19 .....	10 .....	19 .....	10 .....	10 .....	19
ATI System Use .....	0 .....	0 .....	0 .....	0 .....	0 .....	0
Weight Reduction (lb) .....	0 .....	0 .....	0 .....	0 .....	0 .....	0
Drive Cycle Weightings .....						
65-MPH Cruise .....	86% .....	64% .....	86% .....	64% .....	64% .....	64%
55-MPH Cruise .....	9% .....	17% .....	9% .....	17% .....	17% .....	17%
Transient Driving .....	5% .....	19% .....	5% .....	19% .....	19% .....	19%

### (b) Effectiveness of Technologies

The agencies are proposing to recognize trailer improvements via four performance parameters: aerodynamic drag reduction, tire rolling resistance

reduction, the adoption of ATI systems, and by substituting specific weight-reducing components. Table IV–8 summarizes the performance levels for each of these parameters based on the

technology characteristics outlined in Section IV. D. (2) .

<sup>232</sup> Scarcelli, Jamie. "Fuel Efficiency for Trailers" Presented at ACEEE/ICCT Workshop: Emerging Technologies for Heavy-Duty Vehicle Fuel Efficiency, Wabash National Corporation. July 22, 2014.

<sup>233</sup> "Weight Reduction: A Glance at Clean Freight Strategies", EPA SmartWay. EPA420F09–043. Available at: <http://permanent.access.gpo.gov/gpo38937/EPA420F09-043.pdf>.

<sup>234</sup> Memorandum dated June 2015 regarding confidential weight reduction information obtained

during SBREFA Panel. Docket EPA–HQ–OAR–2014–0827.

<sup>235</sup> Randall Scheps, Aluminum Association, "The Aluminum Advantage: Exploring Commercial Vehicles Applications," presented in Ann Arbor, Michigan, June 18, 2009

TABLE IV—8 PERFORMANCE PARAMETERS FOR THE PROPOSED TRAILER PROGRAM

Aerodynamics (Delta C <sub>D</sub> A, m <sup>2</sup> ):	
Bin I .....	0.0.
Bin II .....	0.1.
Bin III .....	0.3.
Bin IV .....	0.5.
Bin V .....	0.7.
Bin VI .....	1.0.
Bin VII .....	1.4.
Bin VIII .....	1.8.
Tire Rolling Resistance (C <sub>RR</sub> , kg/ton):	
Tire Baseline .....	6.0.
Tire Level 1 .....	5.1.

TABLE IV—8 PERFORMANCE PARAMETERS FOR THE PROPOSED TRAILER PROGRAM—Continued

Tire Level 2 .....	4.7.
Tire Inflation System (% reduction):	
ATI System .....	1.5.
Weight Reduction (lbs):	
Weight .....	1/3 added to payload, remaining reduces overall vehicle weight.

These performance parameters have different effects on each trailer

subcategory due to differences in the simulated trailer characteristics. Table IV-9 shows the agencies' estimates of the effectiveness of each parameter for the four box trailer subcategories. Each technology was evaluated using the baseline parameter values for the other technology categories. For example, each aerodynamic bin was evaluated using the baseline tire (6.0 kg/ton) and the baseline weight reduction option (zero lbs). The table shows that aerodynamic improvements offer the largest potential for CO<sub>2</sub> emissions and fuel consumption reductions, making them relatively effective technologies.

TABLE IV—9—EFFECTIVENESS (PERCENT CO<sub>2</sub> AND FUEL SAVINGS FROM BASELINE) OF TECHNOLOGIES FOR THE PROPOSED TRAILER PROGRAM

Aerodynamics	Delta C <sub>D</sub> A (m <sup>2</sup> )	Dry van		Refrigerated van	
		Long	Short	Long	Short
Bin I .....	0.0 .....	0%	0%	0%	0%
Bin II .....	0.1 .....	-1	-1	-1	-1
Bin III .....	0.3 .....	-2	-2	-2	-2
Bin IV .....	0.5 .....	-3	-4	-3	-3
Bin V .....	0.7 .....	-5	-5	-5	-5
Bin VI .....	1.0 .....	-7	-7	-7	-7
Bin VII .....	1.4 .....	-10	-10	-9	-10
Bin VIII .....	1.8 .....	-13	-13	-12	-12
Tire Rolling Resistance	C <sub>RR</sub> (kg/ton) .....	Dry van		Refrigerated van	
		Long	Short	Long	Short
Baseline .....	6.0 .....	0	0	0	0
Level 1 .....	5.1 .....	-2	-1	-2	-1
Level 2 .....	4.7 .....	-3	-2	-3	-2
Weight Reduction	Weight (lb) .....	Dry van		Refrigerated van	
		Long	Short	Long	Short
Baseline .....	0.0 .....	0.0	0.0	0.0	0.0
Al. Dual Wheels .....	168 .....	-0.2	-0.3	-0.2	-0.3
Upper Coupler .....	280 .....	-0.3	-1	-0.3	-1
Suspension .....	430 .....	-0.5	-1	-0.5	-1
Al. Single Wide .....	556 .....	-1	-1	-1	-1

#### (c) Reference Tractor-Trailer To Evaluate Benefits and Costs

In order to evaluate the benefits and costs of the proposed standards, it is necessary to establish a reference point for comparison. As mentioned previously, the technologies described in Section IV. D. (2) exist in the market today, and their adoption is driven by available fuel savings as well as by the voluntary SmartWay Partnership and California's tractor-trailer requirements. For this proposal, the agencies identified reference case tractor-trailers for each trailer subcategory based on the technology adoption rates we project would exist if this proposed trailer program was not implemented.

We project that by 2018, absent further California regulation, EPA's SmartWay program and these research programs will result in about 20 percent of 53-foot dry and refrigerated vans adopting basic SmartWay-level aerodynamic technologies (meeting SmartWay's four percent verification level and Bin III from Table IV-5), 30 percent adopting more advanced aerodynamic technologies at the five percent SmartWay-verification level (Bin IV from Table IV-5) and five percent adding combinations of technologies (Bin V).<sup>236 237 238</sup> In

addition, we project half of these 53' box trailers will be equipped with SmartWay-verified tires (*i.e.*, 5.1 kg/ton or better) and ATI systems as well. The agencies project that market forces will drive an additional one percent increase in adoption of the advanced SmartWay and tire technologies each year through 2027. For analytical purposes, the agencies assumed manufacturers of the shorter box trailers and other trailer

<sup>237</sup> Ben Sharpe (ICCT) and Mike Roeth (North American Council for Freight Efficiency), "Costs and Adoption Rates of Fuel-Saving Technologies for Trailer in the North American On-Road Freight Sector", Feb 2014.

<sup>238</sup> Frost & Sullivan, "Strategic Analysis of North American Semi-trailer Advanced Technology Market", Feb 2013.

<sup>236</sup> Truck Trailer Manufacturers Association letter to EPA. Received on October 16, 2014. Docket EPA-HQ-OAR-2014-0827.

subcategories would not adopt these technologies in the timeframe considered and a zero-technology

baseline is assumed. We are not assuming weight reduction for any of the trailer subcategories in the reference

cases. Table IV–10 summarizes the reference case trailers for each trailer subcategory.

TABLE IV–10—PROJECTED ADOPTION RATES AND AVERAGE PERFORMANCE PARAMETERS FOR THE LESS DYNAMIC REFERENCE CASE TRAILERS

Technology	Long box dry & refrigerated vans				Short box, non-aero box, & non-box trailers
Model Year	2018	2021	2024	2027	2018–2027
Aerodynamics:					
Bin I .....	45%	41%	38%	35%	100%
Bin II .....					
Bin III .....	20	20	20	20	
Bin IV .....	30	34	37	40	
Bin V .....	5	5	5	5	
Bin VI .....					
Bin VII .....					
Bin VIII .....					
Average Delta C <sub>DA</sub> (m <sup>2</sup> ) <sup>a</sup> .....	0.2	0.3	0.3	0.3	0.0
Tire Rolling Resistance:					
Baseline tires .....	50	47	43	40	100
Level 1 tires .....	50	53	57	60	
Level 2 tires .....					
Average C <sub>RR</sub> (kg/ton) <sup>a</sup> .....	5.55	5.52	5.49	5.46	6.0
Tire Inflation:					
ATI .....	50	53	57	60	0
Average % Reduction <sup>a</sup> .....	0.8	0.8	0.9	0.9	0.0
Weight Reduction (lbs):					
Weight <sup>b</sup> .....					

Notes: A blank cell indicates a zero value.

<sup>a</sup> Combines adoption rates with performance levels shown in Table IV–8.

<sup>b</sup> Weight reduction was not projected for the reference case trailers.

Also shown in Table IV–10 are average aerodynamic performance (delta C<sub>DA</sub>), average tire rolling resistance (C<sub>RR</sub>), and average reductions due to use of ATI and weight reduction for each stage of the proposed program. These values indicate the performance of theoretical average tractor-trailers that the agencies project will be in use if no federal regulations were in place for trailer CO<sub>2</sub> and fuel consumption. The average tractor-trailer vehicles serve as reference cases for each trailer subcategory. The agencies provide a detailed description of the development

of these reference case vehicles in Chapter 2.10 in the draft RIA.

Because the agencies cannot be certain about future trends, we also considered a second reference case. This more dynamic reference case reflects the possibility that absent a Phase 2 regulation, there will be continuing adoption of technologies in the trailer market after 2027 that reduce fuel consumption and CO<sub>2</sub> emissions. This case assumes the research funded and conducted by the federal government, industry, academia and other organizations will, after 2027, result the adoption of some technologies beyond

the levels required to comply with existing regulatory and voluntary programs. One example of such research is the Department of Energy Super Truck program which has a goal of demonstrating cost-effective measures to improve the efficiency of Class 8 long-haul freight trucks by 50 percent by 2015.<sup>239</sup> This reference case assumes that by 2040, 75 percent of new trailers will be equipped with SmartWay-verified aerodynamic devices, low rolling resistance tires, and ATI systems. Table IV–11 shows the agencies' projected adoption rates of technologies in the more dynamic reference case.

TABLE IV–11—PROJECTED ADOPTION RATES AND AVERAGE PERFORMANCE PARAMETERS FOR THE MORE DYNAMIC REFERENCE CASE

Technology	Long box dry & refrigerated vans					Short box, non-aero box, & non-box trailers
Model year	2018	2021	2024	2027	2040	2018–2027
Aerodynamics:						
Bin I .....	45%	41%	38%	35%	20%	100%
Bin II .....						
Bin III .....	20	20	20	20	20	

<sup>239</sup> Daimler Truck North America. SuperTruck Program Vehicle Project Review. June 19, 2014. Docket EPA–HQ–OAR–2014–0827.

TABLE IV–11—PROJECTED ADOPTION RATES AND AVERAGE PERFORMANCE PARAMETERS FOR THE MORE DYNAMIC REFERENCE CASE—Continued

Technology	Long box dry & refrigerated vans					Short box, non-aero box, & non-box trailers
	2018	2021	2024	2027	2040	2018–2027
Model year						
Bin IV .....	30	34	37	40	55	.....
Bin V .....	5	5	5	5	5	.....
Bin VI .....	.....	.....	.....	.....	.....	.....
Bin VII .....	.....	.....	.....	.....	.....	.....
Bin VIII .....	.....	.....	.....	.....	.....	.....
Average $\Delta C_{DA}$ (m <sup>2</sup> ) <sup>a</sup> .....	0.2	0.3	0.3	0.3	0.4	0.0
Tire Rolling Resistance:						
Baseline tires .....	50	47	43	40	25	100
Level 1 tires .....	50	53	57	60	75	.....
Level 2 tires .....	.....	.....	.....	.....	.....	.....
Average $C_{RR}$ (kg/ton) <sup>a</sup> .....	5.6	5.5	5.5	5.5	5.3	6.0
Tire Inflation:						
ATI .....	50	53	57	60	75	0
Average % Reduction <sup>a</sup> .....	0.8	0.8	0.9	0.9	1.1	0.0
Weight Reduction (lbs):						
Weight <sup>b</sup> .....	.....	.....	.....	.....	.....	.....

**Notes:** A blank cell indicates a zero value.

<sup>a</sup> Combines adoption rates with performance levels shown in Table IV–8.

<sup>b</sup> Weight reduction was not projected for the reference case trailers.

The agencies applied the vehicle attributes from Table IV–7 and the average performance values from Table IV–10 in the proposed Phase 2 GEM vehicle simulation to calculate the CO<sub>2</sub> emissions and fuel consumption performance of the reference tractor-trailers. The results of these simulations

are shown in Table IV–12. We used these CO<sub>2</sub> and fuel consumption values to calculate the relative benefits of the proposed standards. Note that the large difference between the per ton-mile values for long and short trailers is due primarily to the large difference in assumed payload (19 tons compared to

10 tons) as seen in Table IV–7 and discussed further in the Chapter 2.10.3. The alternative reference case shown in Table IV–11 impacts the long-term projections of benefits beyond 2027, which are analyzed in Chapters 5–7 of the draft RIA.

TABLE IV–12—CO<sub>2</sub> EMISSIONS AND FUEL CONSUMPTION RESULTS FOR THE REFERENCE TRACTOR-TRAILERS

Length	Dry van		Refrigerated van	
	Long	Short	Long	Short
CO <sub>2</sub> Emissions (g/ton-mile) .....	85	147	87	151
Fuel Consumption (gal/1000 ton-miles) .....	8.3497	14.4401	8.5462	14.8330

#### (d) Projected Technology Adoption Rates for the Proposed Standards

As described in Section IV. E., the agencies evaluated several alternatives for the proposed trailer program. Based on our analysis, and current information, the agencies are proposing the alternative we believe reflects the agencies' respective statutory authorities. The agencies are also considering an accelerated alternative with less lead time, requiring the same incremental stringencies for the proposed program, but becoming effective three years earlier. The agencies believe this alternative has the potential to be the maximum feasible alternative. However, based on the evidence currently before us, EPA and NHTSA have outstanding questions regarding relative risks and benefits of

Alternative 4 due to the timeframe envisioned by that alternative. EPA and NHTSA are seriously considering this accelerated alternative in whole or in part for the trailer segment. In other words, the agencies could determine that less lead-time is maximum feasible in the final rule. We request comment on these two alternatives, including the proposed lead-times.

Table IV–13 and Table IV–14 present a set of assumed adoption rates for aerodynamic, tire, and ATI technologies that a manufacturer could apply to meet the proposed standards. These adoption rates begin with 60 percent of long box trailers achieving current SmartWay level aerodynamics (Bin IV) and progress to 90 percent achieving SmartWay Elite (Bin VI) or better over the following nine years. The adoption rates for short box trailers assume

adoption of single aero devices in MY 2021 and combinations of devices by MY 2027. Although the shorter lengths of these trailers can restrict the design of aerodynamic technologies that fully match the SmartWay-like performance levels of long boxes, we nevertheless expect that trailer and device manufacturers would continue to innovate skirt, under-body, rear, and gap-reducing devices and combinations to achieve improved aerodynamic performance on these shorter trailers. The assumed adoption rates for aerodynamic technologies for both long and short refrigerated vans are slightly less than for dry vans, reflecting the more limited number of aerodynamic options due to the presence of their TRUs.

The gradual increase in assumed adoption of aerodynamic technologies

throughout the phase-in to the MY 2027 standards recognizes that even though many of the technologies are available today and technologically feasible throughout the phase-period, their adoption on the scale of the proposed program would likely take time. The adoption rates we are assuming in the interim years—and the standards that we developed from these rates—represent steady and yet reasonable improvement in average aerodynamic performance.

The agencies project that nearly all box trailers will adopt tire technologies to comply with the standards and the agencies projected consistent adoption rates across all lengths of dry and refrigerated vans, with more advanced (Level 2) low-rolling resistance tires assumed to replace Level 1 tire models in the 2024 time frame, as Level 2-type

tires become more available and fleet experience with these tires develops. As mentioned previously, the agencies did not include weight reduction in their technology adoption projections, but certain types of weight reduction could be used as a compliance pathway, as discussed in Section IV.D.1.d above.

The adoption rates shown in these tables are one set of many possible combinations that box trailer manufacturers could apply to achieve the same average stringency. If a manufacturer chose these adoption rates, a variety of technology options exist within the aerodynamic bins, and several models of LRR tires exist for the levels shown. Alternatively, technologies from other aero bins and tire levels could be used to comply. It should be noted that manufacturers are not limited to aerodynamic and tire

technologies, since these are performance-based standards, and manufacturers would not be constrained to adopt any particular way to demonstrate compliance. Certain types of weight reduction, for example, may be used as a compliance pathway, as discussed in Section IV.D.1.d above.

Similar to our analyses of the reference cases, the agencies derived a single set of performance parameters for each subcategory by weighting the performance levels included in Table IV–8 by the corresponding adoption rates. These performance parameters represent an average compliant vehicle for each trailer subcategory and we present these values in the tables. The 2024 MY adoption rates would continue to apply for the partial-aero box trailers in 2027 and later model years.

TABLE IV–13—PROJECTED ADOPTION RATES AND AVERAGE PERFORMANCE PARAMETERS FOR LONG BOX TRAILERS

Technology	Long box dry vans				Long box refrigerated vans			
Model year	2018	2021	2024	2027	2018	2021	2024	2027
<b>Aerodynamic Technologies:</b>								
Bin I .....	5%	.....	.....	.....	5%	.....	.....	.....
Bin II .....	.....	.....	.....	.....	.....	.....	.....	.....
Bin III .....	30%	5%	.....	.....	30%	5%	.....	.....
Bin IV .....	60%	55%	25%	.....	60%	55%	25%	.....
Bin V .....	5%	10%	10%	10%	5%	10%	10%	20%
Bin VI .....	.....	30%	65%	50%	.....	30%	65%	60%
Bin VII .....	.....	.....	.....	40%	.....	.....	.....	20%
Bin VIII .....	.....	.....	.....	.....	.....	.....	.....	.....
Average $\Delta C_D A$ (m <sup>2</sup> ) <sup>a</sup> .....	0.4	0.7	0.8	1.1	0.4	0.7	0.8	1.0
<b>Trailer Tire Rolling Resistance:</b>								
Baseline tires .....	15%	5%	5%	5%	15%	5%	5%	5%
Level 1 tires .....	85%	95%	.....	.....	85%	95%	.....	.....
Level 2 tires .....	.....	.....	95%	95%	.....	.....	95%	95%
Average $C_{RR}$ (kg/ton) <sup>a</sup> .....	5.2	5.1	4.8	4.8	5.2	5.1	4.8	4.8
<b>Tire Inflation System:</b>								
ATI .....	85	95	95	95	85	95	95	95
Average ATI Reduction (%) <sup>a</sup> .....	1.3%	1.4%	1.4%	1.4%	1.3%	1.4%	1.4%	1.4%
<b>Weight Reduction (lbs):</b>								
Weight <sup>b</sup> .....	.....	.....	.....	.....	.....	.....	.....	.....

**Notes:** A blank cell indicates a zero value.

<sup>a</sup> Combines projected adoption rates with performance levels shown in Table IV–8.

<sup>b</sup> This set of proposed adoption rates did not apply any assumed weight reduction to meet the proposed standards for these trailers.

TABLE IV–14—PROJECTED ADOPTION RATES AND AVERAGE PERFORMANCE PARAMETERS FOR SHORT BOX TRAILERS

Technology	Short box dry vans				Short box refrigerated vans			
Model year	2018	2021	2024	2027	2018	2021	2024	2027
<b>Aerodynamic Technologies:<sup>a</sup></b>								
Bin I .....	100%	5%	.....	.....	100%	5%	.....	.....
Bin II .....	.....	95%	70%	30%	.....	95%	70%	55%
Bin III .....	.....	.....	30%	60%	.....	.....	30%	40%
Bin IV .....	.....	.....	.....	10%	.....	.....	.....	5%
Bin V .....	.....	.....	.....	.....	.....	.....	.....	.....
Bin VI .....	.....	.....	.....	.....	.....	.....	.....	.....
Bin VII .....	.....	.....	.....	.....	.....	.....	.....	.....
Bin VIII .....	.....	.....	.....	.....	.....	.....	.....	.....
Average $\Delta C_D A$ (m <sup>2</sup> ) <sup>b</sup> .....	0.4	0.7	0.8	1.1	0.4	0.7	0.8	1.0
<b>Trailer Tire Rolling Resistance:</b>								
Baseline tires .....	15%	5%	5%	5%	15%	5%	5%	5%
Level 1 tires .....	85%	95%	.....	.....	85%	95%	.....	.....
Level 2 tires .....	.....	.....	95%	95%	.....	.....	95%	95%
Average $C_{RR}$ (kg/ton) <sup>b</sup> .....	5.2	5.1	4.8	4.8	5.2	5.1	4.8	4.8

TABLE IV-14—PROJECTED ADOPTION RATES AND AVERAGE PERFORMANCE PARAMETERS FOR SHORT BOX TRAILERS—Continued

Technology	Short box dry vans				Short box refrigerated vans			
Model year	2018	2021	2024	2027	2018	2021	2024	2027
Tire Inflation System:								
ATI .....	85%	95%	95%	95%	85%	95%	95%	95%
Average ATI Reduction (%) <sup>c</sup> .....	1.3%	1.4%	1.4%	1.4%	1.3%	1.4%	1.4%	1.4%
Weight Reduction (lbs):								
Weight <sup>b</sup> .....								

**Notes:** A blank cell indicates a zero value.

<sup>a</sup> The majority of short box trailers are 28 feet in length. We recognize that they are often operated in tandem, which limits the technologies that can be applied (for example, boat tails).

<sup>b</sup> Combines projected adoption rates with performance levels shown in Table IV-8.

<sup>c</sup> This set of proposed adoption rates did not apply any assumed weight reduction to meet the proposed standards for these trailers.

Non-aero box trailers, with two or more work-related special components, and non-box trailers are not shown in the tables above. We are proposing that manufacturers of these trailers meet design-based (*i.e.*, technology-based) standards, instead of performance-based standards that would apply to other trailers. That is, manufacturers of these trailers would not need to use aerodynamic technologies, but they would need to use appropriate lower rolling resistance tires and ATI systems, based on our assessments of the typical CO<sub>2</sub> and fuel consumption performance

of this equipment (see Section IV.2.c). Thus, we are projecting 100 percent adoption rates of these technologies at each stage of the program. Compared to manufacturers that needed aerodynamic technologies to comply, the approach for non-aero box trailers and non-box trailers would result in a significantly lower compliance burden for manufacturers by reducing the amount of tracking and eliminating the need to calculate a compliance value (see Section IV. F.). The agencies are proposing these design standards in two stages. In 2018, the proposed standards

would require manufacturers to use tires meeting a rolling resistance of Level 1 or better and to install ATI systems on all non-box and non-aero box trailers. In 2024, the proposed standards would require manufacturers to use LRR tires at a Level 2 or better, and to still install ATI systems. We seek comment on all aspects of this design-based standards concept. We also seek comment on providing manufacturers with the option of adopting Level 2 tires in the early years of the program (MY 2018–2023) and avoiding the use of ATI systems if they chose.

TABLE IV-15—PROJECTED ADOPTION RATES AND AVERAGE PERFORMANCE PARAMETERS FOR NON-AERO BOX AND NON-BOX TRAILERS

Technology	Non-aero box & non-box trailers			
Model year	2018	2021	2024	2027
Aerodynamic Technologies:				
Bin I .....	100%	100%	100%	100%
Bin II .....				
Bin III .....				
Bin IV .....				
Bin V .....				
Bin VI .....				
Bin VII .....				
Bin VIII .....				
Average Delta C <sub>D</sub> A (m <sup>2</sup> ) <sup>a</sup> .....	0.0	0.0	0.0	0.0
Trailer Tire Rolling Resistance:				
Baseline tires .....				
Level 1 tires .....	100%	100%		
Level 2 tires .....			100%	100%
Average C <sub>RR</sub> (kg/ton) <sup>a</sup> .....	5.1	5.1	4.7	4.7
Tire Inflation System:				
ATI .....	100%	100%	100%	100%
Average ATI Reduction (%) <sup>a</sup> .....	1.5%	1.5%	1.5%	1.5%
Weight Reduction (lbs):				
Weight <sup>b</sup> .....				

**Notes:** A blank cell indicates a zero value.

<sup>a</sup> Combines projected adoption rates with performance levels shown in Table IV-8.

<sup>b</sup> This set of adoption rates did not apply weight reduction to meet the proposed standards for these trailers.

We request comment and any data related to our projections of technology adoption rates. The following section (d) explains how the agencies combined these adoption rates with the

performance values shown previously to calculate the proposed standards.

(e) Derivation of the Proposed Standards

The average performance parameters from Table IV-14, and Table IV-15 were applied as input values to the GEM vehicle simulation to derive the

proposed HD Phase 2 fuel consumption and CO<sub>2</sub> emissions standards for each subcategory of trailers. The proposed standards are shown in Table IV–16. The proposed standards for partial-aero trailers, which are not explicitly shown in Table IV–16, would be the same as their full-aero counterparts through MY 2026. In MY 2027 and later, partial aero

trailers would continue to meet the MY 2024 standards.

Over the four stages of the proposed rule, box trailers longer than 50 feet would, on average, reduce their CO<sub>2</sub> emissions and fuel consumption by two percent, four percent, seven percent and eight percent compared to their reference cases. Box trailers 50-feet and

shorter would achieve reductions of two percent, three percent and four percent compared to their reference cases. The tire technologies used on non-box and non-aero box trailers would provide reductions of two percent in the first two stages and achieve three percent by 2027.

TABLE IV–16—PROPOSED STANDARDS FOR BOX TRAILERS

Model year	Subcategory	Dry van		Refrigerated van	
		Long	Short	Long	Short
2018–2020 .....	EPA Standard (CO <sub>2</sub> Grams per Ton-Mile) .. Voluntary NHTSA Standard (Gallons per 1,000 Ton-Mile).	83 8.1532	144 14.1454	84 8.2515	147 14.4401
2021–2023 .....	EPA Standard (CO <sub>2</sub> Grams per Ton-Mile) .. NHTSA Standard (Gallons per 1,000 Ton-Mile).	81 7.9568	142 13.9489	82 8.0550	146 14.3418
2024–2026 .....	EPA Standard (CO <sub>2</sub> Grams per Ton-Mile) .. NHTSA Standard (Gallons per 1,000 Ton-Mile).	79 7.7603	141 13.8507	81 7.9568	144 14.1454
2027 + .....	EPA Standard (CO <sub>2</sub> Grams per Ton-Mile) .. NHTSA Standard (Gallons per 1,000 Ton-Mile).	77 7.5639	140 13.7525	80 7.8585	144 14.1454

It should be noted that the proposed standards are based on highway cruise cycles that include road grade to better reflect real world driving and to help recognize engine and driveline technologies. See Section III.E. The agencies have evaluated some alternate road grade profiles recommended by the National Renewable Energy Laboratory (NREL) and have prepared possible alternative trailer vehicle standards based on these profiles. The agencies request comment on this analysis, which is available in a memorandum to the docket.<sup>240</sup>

(f) Technology Costs for the Proposed Standards

The agencies evaluated the technology costs for 53-foot dry and refrigerated vans and 28-foot dry vans,

which we believe are representative of the majority of trailers in the 50-foot and longer and shorter than 50-foot categories, respectively. We identified costs for each technology package evaluated and projected the costs for each year of the program. A summary of the technology costs is included in Table IV–17 through Table IV–20 for MYs 2018 through 2027, with additional details available in the draft RIA Chapter 2.12. Costs shown in the following tables are for the specific model year indicated and are incremental to the average reference case costs, which includes some level of adoption of these technologies as shown in Table IV–13. Therefore, the technology costs in the following tables reflect the average cost expected for

each of the indicated trailer classes. Note that these costs do not represent actual costs for the individual components because some fraction of the component costs has been subtracted to reflect some use of these components in the reference case. For more on the estimated technology costs exclusive of adoption rates, refer to Chapter 2.12 of the draft RIA. These costs include indirect costs via markups and reflect lower costs over time due to learning impacts. For a description of the markups and learning impacts considered in this analysis and how technology costs for other years are thereby affected, refer to Chapter 7 of the draft RIA. We welcome comment on the technology costs, markups, and learning impacts.

TABLE IV–17—TRAILER TECHNOLOGY INCREMENTAL COSTS IN THE 2018 MODEL YEAR  
[2012\$]

	53-foot dry van	53-foot refrigerated van	28-foot dry van	Non-aero & non-box
Aerodynamics .....	\$285	\$285	\$0	\$0
Tires .....	65	65	78	185
Tire inflation system .....	239	239	435	683
Total .....	588	588	514	868

<sup>240</sup> Memorandum dated May 2015 on Analysis of Possible Tractor, Trailer, and Vocational Vehicle

Standards Based on Alternative Road Grade Profiles. Docket EPA–HQ–OAR–2014–0827.



TABLE IV-18—TRAILER TECHNOLOGY INCREMENTAL COSTS IN THE 2021 MODEL YEAR  
[2012\$]

	53-foot dry van	53-foot refrigerated van	28-foot dry van	Non-aero & non-box
Aerodynamics .....	\$602	\$602	\$468	\$0
Tires .....	65	65	79	175
Tire inflation system .....	234	234	426	632
Total .....	901	901	974	807

TABLE IV-19—TRAILER TECHNOLOGY INCREMENTAL COSTS IN THE 2024 MODEL YEAR  
[2012\$]

	53-foot dry van	53-foot refrigerated van	28-foot dry van	Non-aero & non-box
Aerodynamics .....	\$836	\$836	\$608	\$0
Tires .....	61	61	76	160
Tire inflation system .....	220	220	412	578
Total .....	1,116	1,116	1,097	739

TABLE IV-20—TRAILER TECHNOLOGY INCREMENTAL COSTS IN THE 2027 MODEL YEAR  
[2012\$]

	53-foot dry van	53-foot refrigerated van	28-foot dry van	Non-aero & non-box
Aerodynamics .....	\$1,163	\$1,034	\$788	\$0
Tires .....	54	54	74	155
Tire inflation system .....	192	192	391	549
Total .....	1,409	1,280	1,253	704

#### (4) Consistency of the Proposed Trailer Standards With the Agencies' Legal Authority

The agencies' initial determination, subject to consideration of public comment, is that the standards presented in the Section IV.C.2, are the maximum feasible and appropriate under the agencies' respective authorities, considering lead time, cost, and other factors. The agencies' proposed decisions on the stringency and timing of the proposed standards focused on available technology and the consequent emission reductions and fuel efficiency improvements associated with use of the technology, while taking into account the circumstances of the trailer manufacturing sector. Trailer manufacturers would be subject to first-time emission control and fuel consumption regulation under the proposed standards. These manufacturers are in many cases small businesses, with limited resources to master the mechanics of regulatory compliance. Thus, the agencies' proposal seeks to provide a reasonable time for trailer manufacturers to become

familiar with the requirements and the proposed new compliance regime, given the unique circumstances of the industry and the compliance flexibilities and optional compliance mechanisms specially adapted for this industry segment that we are proposing.

The stringency of the standard is predicated on more widespread deployment of aerodynamic and tire technologies that are already in commercial use. The availability, feasibility, and level of effectiveness of these technologies are well-documented. Thus the agencies do not believe that there is any issue of technological feasibility of the proposed standards. Among the issues reflected in the agencies' proposal are considerations of cost and sufficiency of lead-time—including lead-time not only to deploy technological improvements, but also this industry sector to assimilate for the first time the compliance mechanisms of the proposed rule.

The highest cost shown in Table IV-20 is associated with the long dry vans. We project that the average cost per trailer to meet the proposed MY 2027

standards for these trailers would be about \$1,400, which is less than 10 percent of the cost of a new dry van trailer (estimated to be about \$20,000). Other trailer types have lower projected technology costs, and many have higher purchase prices. As a result, we project that the per-trailer costs for all trailers covered in this regulation will be less than 10 percent of the cost of a new trailer. This trend is consistent with the expected average control costs for Phase 2 tractors, which are also less than 10 percent of typical tractor costs (see Section III).

The agencies believe these technologies can be adopted at the rates the standards are predicated on within the proposed lead-time, as discussed above in Section IV.C.(3). Moreover, we project that most owners would rapidly recover the initial cost of these technologies due to the associated fuel savings, usually in less than two years, as shown in the payback analysis in Section IX. This payback period is generally considered reasonable in the

trailer industry for investments that reduce fuel consumption.<sup>241</sup>

Overall, as discussed above in IV.D.3.c in the context of our assumed technology adoption rates, the gradual increase in stringency of the proposed trailer program over the phase-in period recognizes two important factors that the agencies carefully considered in developing this proposed rule. One factor is that assumed adoption of technologies many of the aerodynamic technologies that box trailer manufacturers would likely choose are available today and clearly

technologically feasible throughout the phase-period. At the same time, we recognize that the adoption of these technologies across the industry scale envisioned by the proposed program would likely take time. The standards we are proposing in the interim years represent steady improvement in average aerodynamic performance toward the final MY 2027 standards.

#### *E. Alternative Standards and Feasibility Considered*

As discussed in Section X, the agencies evaluated several different

regulatory alternatives representing different levels of stringency for the Phase 2 program. The results of the analysis of these proposed alternatives are discussed below in Section X of the preamble. The agencies believe each alternative is feasible from a technical standpoint. However, each successive alternative increases costs and complexity of compliance for the manufacturers, which can be a prohibitive burden on the large number of small businesses in the industry. Table IV–21 provides a summary of the alternatives considered in this proposal.

TABLE IV–21—SUMMARY OF ALTERNATIVES CONSIDERED FOR THE PROPOSED RULEMAKING

Alternative 1 .....	No action alternative.
Alternative 2 .....	Expand the use of aerodynamic and tire technologies at SmartWay levels to all 53-foot box trailers.
Alternative 3 (Proposed Alternative) .....	Adoption of advanced aerodynamic and tire technologies on all box trailers.
Alternative 4 .....	Adoption of tire technologies on non-box trailers.
Alternative 5 .....	Same technology and application assumptions as Alternative 3 with an accelerated introduction schedule.
Alternative 5 .....	Aggressive adoption of advance aerodynamic and tire technologies for all box trailers.
Alternative 5 .....	Adoption of aerodynamic and tire technologies for some tank, flatbed, and container chassis trailers.
Alternative 5 .....	Adoption of tire technologies for the remaining non-box trailers.

While we welcome comment on any of these alternatives, we are specifically requesting comment on Alternative 4 for the trailer program identified as Alternative 4 above and in Section X. The same general technology effectiveness values were considered and much of the feasibility analysis was the same in this alternative and in the proposed alternative, but Alternative 4 applies the adoption rates of higher-performing aerodynamic technologies from Alternative 3 at earlier stages for box trailers. This accelerated alternative achieves the same final fuel consumption and CO<sub>2</sub> reductions as our proposed alternative three years in advance. The following sections detail the adoption rates, reductions and costs projected for this alternative.

#### (1) Effectiveness, Adoption Rates, and Technology Costs for Alternative 4

Alternative 4 includes the same trailer subcategories and same trailer technologies as the proposed alternative. Therefore, the zero-technology baseline trailers (Table IV–7), reference case trailers (Table IV–10) and performance levels (Table IV–8) described in Section IV. D. apply for this analysis as well. The following sections describe the adoption rates of this accelerated alternative and the associated benefits and costs.

#### (a) Projected Technology Adoption Rates for Alternative 4

The adoption rates and average performance parameters projected by the agencies for Alternative 4 are shown

in Table IV–22 and Table IV–23.

Adoption rates for non-aero box and non-box trailers remain unchanged from the proposed standards and they are not repeated in this section. From the tables, it can be seen that the 2018 MY aerodynamic technology adoption rates and the tire technology adoption rates for all model years are identical to those presented previously for the proposed standards. The aerodynamic projections for MY 2021 and MY 2024 in this accelerated alternative are the same as those projected for MY 2024 and MY 2027 of the proposed standards, but are applied three years earlier. In this alternative, the 2021 MY adoption rates would continue to apply for the partial-aero box trailers in 2024 and later model years.

TABLE IV–22—ADOPTION RATES AND AVERAGE PERFORMANCE PARAMETERS FOR THE LONG BOX TRAILERS IN ALTERNATIVE 4

Technology	Long box dry vans			Long box refrigerated vans		
	2018	2021	2024	2018	2021	2024
Aerodynamic Technologies: <sup>a</sup>						
Bin I .....	5%	.....	.....	5%	.....	.....
Bin II .....	.....	.....	.....	.....	.....	.....
Bin III .....	30%	.....	.....	30%	.....	.....
Bin IV .....	60%	25%	.....	60%	25%	.....
Bin V .....	5%	10%	10%	5%	10%	20%
Bin VI .....	.....	65%	50%	.....	65%	60%

<sup>241</sup> Roeth, Mike, *et al.* “Barriers to Increased Adoption of Fuel Efficiency Technologies in Freight Trucking”. July 2013. International Council for

Clean Transportation. Available here: <http://www.theicct.org/sites/default/files/publications/>

ICCT-NACFE-CSS\_Barriers\_Report\_Final\_20130722.pdf.

TABLE IV–22—ADOPTION RATES AND AVERAGE PERFORMANCE PARAMETERS FOR THE LONG BOX TRAILERS IN ALTERNATIVE 4—Continued

Technology	Long box dry vans			Long box refrigerated vans		
Model year	2018	2021	2024	2018	2021	2024
Bin VII .....			40%			20%
Bin VIII .....						
Average $\Delta C_D A$ ( $m^2$ ) <sup>a</sup> .....	0.4	0.8	1.1	0.4	0.8	1.0
Trailer Tire Rolling Resistance:						
Baseline tires .....	15	5	5	15	5	5
Level 1 tires .....	85	95		85	95	
Level 2 tires .....			95			95
Average $C_{RR}$ (kg/ton) <sup>a</sup> .....	5.2	5.1	4.8	5.2	5.1	4.8
Tire Inflation System:						
ATI .....	85%	95%	95%	85%	95%	95%
Average ATI Reduction (%) <sup>a</sup> .....	1.3%	1.4%	1.4%	1.3%	1.4%	1.4%
Weight Reduction (lbs):						
Weight <sup>b</sup> .....						

**Notes:** A blank cell indicates a zero value.

<sup>a</sup> Combines adoption rates with performance levels shown in Table IV–8.

<sup>b</sup> This set of adoption rates did not apply weight reduction to meet the proposed standards for these trailers.

TABLE IV–23—ADOPTION RATES AND AVERAGE PERFORMANCE PARAMETERS FOR THE SHORT BOX TRAILERS IN ALTERNATIVE 4

Technology	Short box dry vans			Short box refrigerated vans		
Model Year	2018	2021	2024	2018	2021	2024
Aerodynamic Technologies <sup>a</sup>						
Bin I .....	100%			100%		
Bin II .....		70%	30%		70%	55%
Bin III .....		30%	60%		30%	40%
Bin IV .....			10%			5%
Bin V .....						
Bin VI .....						
Bin VII .....						
Bin VIII .....						
Average $\Delta C_D A$ ( $m^2$ ) <sup>b</sup> .....	0.4	0.8	1.1	0.4	0.8	1.0
Trailer Tire Rolling Resistance:						
Baseline tires .....	15%	5%	5%	15%	5%	5%
Level 1 tires .....	85%	95%		85%	95%	
Level 2 tires .....			95%			95%
Average $C_{RR}$ (kg/ton) <sup>b</sup> .....	5.2	5.1	4.8	5.2	5.1	4.8
Tire Inflation System:						
ATI .....	85%	95%	95%	85%	95%	95%
Average ATI Reduction (%) <sup>b</sup> .....	1.3%	1.4%	1.4%	1.3%	1.4%	1.4%
Weight Reduction (lbs):						
Weight <sup>c</sup> .....						

**Notes:** A blank cell indicates a zero value.

<sup>a</sup> The majority of short box trailers are 28 feet in length. We recognize that they are often operated in tandem, which limits the technologies that can be applied (for example, boat tails).

<sup>b</sup> Combines adoption rates with performance levels shown in Table IV–8.

<sup>c</sup> This set of adoption rates did not apply weight reduction to meet the proposed standards for these trailers.

#### (b) Derivation of the Standards for Alternative 4

Similar to the proposed standards of Section IV. D. (3) (d), the agencies applied the technology performance values from Table IV–22 and Table IV–23 as GEM inputs to derive the proposed standards for each subcategory.

Table IV–24 shows the resulting standards for Alternative 4. Over the three phases of the alternative, box trailers longer than 50 feet would, on average, reduce their CO<sub>2</sub> emissions and fuel consumption by two percent, six percent and eight percent. Box trailers 50-foot and shorter would achieve reductions of two percent, three percent, and four percent compared to the

reference case. Partial-aero box trailers would continue to be subject to the 2021 MY standards for MY 2024 and later. The non-aero box and non-box trailers would meet the same standards as shown in the proposed Alternative 3 and achieve the same two and three percent benefits as shown in the proposed alternative.

TABLE IV–24—TRAILER CO<sub>2</sub> AND FUEL CONSUMPTION STANDARDS FOR BOX TRAILERS IN ALTERNATIVE 4

Model year	Subcategory	Dry van		Refrigerated van	
	Length	Long	Short	Long	Short
2018–2020 .....	EPA Standard .....	83	144	84	147
	(CO <sub>2</sub> Grams per Ton-Mile).				
	Voluntary NHTSA Standard .....	8.1532	14.1454	8.2515	14.4401
2021–2023 .....	(Gallons per 1,000 Ton-Mile).				
	EPA Standard .....	80	142	81	145
	(CO <sub>2</sub> Grams per Ton-Mile).				
2024+ .....	NHTSA Standard .....	7.8585	13.9489	7.9568	14.2436
	(Gallons per 1,000 Ton-Mile).				
	EPA Standard .....	77	140	80	144
	(CO <sub>2</sub> Grams per Ton-Mile).				
	NHTSA Standard .....	7.5639	13.7525	7.8585	14.1454
	(Gallons per 1,000 Ton-Mile).				

## (c) Costs Associated With Alternative 4

A summary of the technology costs is included in Table IV–25 to Table IV–27 for MYs 2018, 2021 and 2024, with additional details available in the draft RIA Chapter 2.12. Costs shown in the following tables are for the specific model year indicated and are incremental to the average reference case costs, which includes some level of

adoption of these technologies as shown in Table IV–10. Therefore, the technology costs in the following tables reflect the average cost expected for each of the indicated trailer classes. Note that these costs do not represent actual costs for the individual components because some fraction of the component costs has been subtracted to reflect some use of these components in the reference case. For

more on the estimated technology costs exclusive of adoption rates, refer to Chapter 2.12 of the draft RIA. These costs include indirect costs via markups and reflect lower costs over time due to learning impacts. For a description of the markups and learning impacts considered in this analysis and how it impacts technology costs for other years, refer to the draft RIA.

TABLE IV–25—TRAILER TECHNOLOGY INCREMENTAL COSTS IN THE 2018 MODEL YEAR FOR ALTERNATIVE 4  
[2012\$]

	53-foot dry van	53-foot refrigerated van	28-foot dry van	Non-aero & non-box
Aerodynamics .....	\$285	\$285	\$0	\$0
Tires .....	65	65	78	185
Tire inflation system .....	239	239	435	683
Total .....	588	588	514	868

TABLE IV–26—TRAILER TECHNOLOGY INCREMENTAL COSTS IN THE 2021 MODEL YEAR FOR ALTERNATIVE 4  
[2012\$]

	53-foot dry van	53-foot refrigerated van	28-foot dry van	Non-aero & non-box
Aerodynamics .....	\$908	\$908	\$641	\$0
Tires .....	65	65	79	175
Tire inflation system .....	234	234	426	632
Total .....	1,207	1,207	1,146	807

TABLE IV–27—TRAILER TECHNOLOGY INCREMENTAL COSTS IN THE 2024 MODEL YEAR FOR ALTERNATIVE 4  
[2012\$]

	53-foot dry van	53-foot refrigerated van	28-foot dry van	Non-aero & non-box
Aerodynamics .....	1,223	1,090	816	0
Tires .....	61	61	76	160
Tire inflation system .....	220	220	412	578
Total .....	1,504	1,371	1,304	739

The agencies believe Alternative 4 has the potential to be the maximum feasible and appropriate alternative. However, based on the evidence currently before us, EPA and NHTSA have outstanding questions regarding relative risks and benefits of Alternative 4 due to the timeframe envisioned by that alternative. As discussed earlier, the ability for manufacturers in this industry to broadly take the necessary technical steps while becoming familiar with first-time regulatory responsibilities may be significantly limited with three fewer years of lead-time. As reinforced in the SBAR Panel Report, this challenge would not be equal across the industry, often falling more heavily on smaller trailer manufacturers.

The agencies request comment on the feasibility and costs for trailer manufacturers to achieve the Alternative 4 standards by applying advanced aerodynamic technologies with three years less lead-time than Alternative 3 would provide. The agencies also request comment on particular burdens that these aggressive adoption rates could have on small business trailer manufacturers.

F. Trailer Standards: Compliance and Flexibilities

Under the proposed structure, trailer manufacturers would be required to obtain a certificate of conformity from EPA before introducing into commerce new trailers subject to the proposed new trailer CO<sub>2</sub> and fuel consumption standards. See CAA section 206(a). The certification process the agencies are proposing for trailer manufacturers is very similar in its basic structure to the process for the tractor program. This structure involves pre-certification activities, the certification application

and its approval, and end-of-year reporting. In this section, the agencies first describe how we developed compliance equations based on the GEM vehicle simulation tool and the general certification process, followed by a discussion of the proposed test procedures for measuring the performance of tires and aerodynamic technologies and how manufacturers would apply test results toward compliance and certification. The section closes with discussions of several other proposed certification and compliance provisions as well as proposed provisions to provide manufacturers with compliance flexibility.

(1) Trailer Compliance Using a GEM-Based Equation

The agencies are committed to introducing a compliance program for trailer manufacturers that is straightforward, technically robust, transparent, and that minimizes new administrative burdens on the industry. As described earlier in this section and in Chapter 4 of the draft RIA, GEM is a customized vehicle simulation model that EPA developed for the Phase 1 program to relate measured aerodynamic and tire performance values, as well as other parameters, to CO<sub>2</sub> and fuel consumption without performing full-vehicle testing. As with the Phase 1 and proposed Phase 2 tractor and vocational vehicle programs, the proposed trailer program uses GEM in evaluating emissions and fuel consumption in developing the proposed standards. However, unlike the tractor and vocational vehicle programs, we are not proposing to use GEM directly to demonstrate compliance with the trailer standards. Instead, we have developed an equation

based on GEM that calculates CO<sub>2</sub> and fuel consumption from performance inputs, but without running the model. For the proposed trailer program, the trailer characteristics that a manufacturer would supply to the equation are aerodynamic improvements (*i.e.*, a change in the aerodynamic drag area, delta C<sub>D</sub>A), tire rolling resistance (*i.e.*, coefficient of rolling resistance, C<sub>RR</sub>), the presence of an automatic tire inflation (ATI) system, and the use of light-weight components from a pre-determined list. The use of the equation would quantify the overall performance of the trailer in terms of CO<sub>2</sub> emissions and fuel consumption on a per ton-mile basis.

Chapter 2.10.6 of the draft RIA provides a full a description of the development and evaluation of the equation proposed for trailer compliance. Equation IV–1 is a single linear regression curve that can be used for all box trailers in this proposal. Unique constant values, C<sub>1</sub> through C<sub>4</sub>, are applied for each of the trailer subcategories as shown in Table IV–28. Constant C<sub>5</sub> is equal to 0.985 for any trailer that installs an ATI system (accounting for the 1.5 percent reduction given for use of ATI) or 1.0 for trailers without ATI systems. This equation was found to accurately reproduce the results of GEM for each of the four box van subcategories and the agencies are proposing that trailer manufacturers use Equation IV–1 when calculating CO<sub>2</sub> for compliance. Manufacturers would use a conversion of 10,180 grams of CO<sub>2</sub> per gallon of diesel to calculate the corresponding fuel consumption values for compliance with NHTSA’s regulations. See 40 CFR 1037.515 and 49 CFR 535.6.

$$y = [C_1 + C_2 \cdot (TRRL) + C_3 \cdot (\Delta C_{DA}) + C_4 \cdot (WR)] \cdot C_5 \quad (IV-1)$$

TABLE IV–28—CONSTANTS FOR GEM-BASED TRAILER COMPLIANCE EQUATION

Trailer subcategory	C <sub>1</sub>	C <sub>2</sub>	C <sub>3</sub>	C <sub>4</sub>
Long Dry Van .....	77.4	1.7	– 6.1	– 0.001
Long Refrigerated Van .....	78.3	1.8	– 6.0	– 0.001
Short Dry Van .....	134.0	2.2	– 10.5	– 0.003
Short Refrigerated Van .....	136.3	2.4	– 10.3	– 0.003

The constants for long vans apply for all dry or refrigerated vans longer than 50-feet and the constants for short vans apply for all dry or refrigerated vans 50-feet and shorter. These long and short van constants are based on GEM-simulated tractors pulling 53-foot and solo 28-foot trailers, respectively. As a result, we are proposing that aerodynamic testing to obtain a trailer’s

performance parameters for Equation IV–1 be performed using consistent trailer sizes (*i.e.*, all lengths of short vans be tested as a solo 28-foot van, and all lengths of long vans be tested as a 53-foot van). More information about aerodynamic testing is provided in Section IV. F. (3).

(2) General Certification Process

Under the proposed process for certification, trailer manufacturers would be required to apply to EPA for certification and would provide performance test data (see 40 CFR 1037.205) in their applications.<sup>242</sup> A

<sup>242</sup> As with the tractor program, manufacturers would submit their applications to EPA, which

staff member from EPA's Compliance Division (in the Office of Transportation and Air Quality) would be assigned to each trailer manufacturer to help them through the compliance process. Although not required, we recommend that manufacturers arrange to meet with the agencies to discuss compliance plans and obtain any preliminary approvals (e.g., appropriate test methods) before applying for certification.

Trailer manufacturers would submit their applications through the EPA VERIFY electronic database, and EPA would issue certificates based on the information provided. At the end of the model year, trailer manufacturers would submit an end-of-year report to the agencies to complete their annual obligations.

The proposed EPA certification provisions also contain provisions for applying to the NHTSA program. EPA and NHTSA would coordinate on any enforcement action required.

#### (a) Preliminary Considerations for Compliance

Prior to submitting an application for a certificate, a manufacturer would choose the technologies they plan to offer their customers, obtain performance information for these technologies, and identify any trailers in their production line that qualify for exclusion from the program.<sup>243</sup> Manufacturers that choose to perform aerodynamic or tire testing would obtain approval of test methods and perform preliminary testing as needed. During this time, the manufacturer would also decide the strategy they intend to use for compliance by identifying "families" for the trailers they produce. A family is a grouping of similar products that would all be subject to the same standard and covered by a single certificate.

At its simplest, the program would allow all products in each of the trailer subcategories to be certified as separate families. That is, long box dry vans, short box dry vans, long refrigerated vans, short refrigerated vans, non-box trailers, partial-aero trailers (long and short box, dry and refrigerated vans), and non-aero trailers, could each be certified as separate trailer families. If a manufacturer chooses this approach, all products within a family would need to meet or do better than the standards for

that trailer subcategory. This is not to say that, for example, every long box dry van model would need to have identical technologies like skirts, tires, and tire inflation systems, but that every model in that family would need to have a combination of technologies that had performance representative of testing demonstrated for that family. (Because the manufacturer would not be using averaging provisions, a trailer that "over-complied" could not offset a trailer that did not meet that family's emission limit).

If a trailer manufacturer wishes to take advantage of the proposed averaging provisions, it could divide the trailer models in each of the standard box trailer categories (*i.e.*, not including the non-box trailer or non-aero box trailer categories<sup>244</sup>) into subfamilies. Each subfamily could be a grouping of trailers that have with similar performance levels, even if they use different technologies. We call the performance levels for each subfamily as "Family Emission Limits" (FELs). A long box dry van manufacturer could choose, for example, to create two or more subfamilies in its long box dry van family. Trailers in one or more of these subfamilies could be allowed to under-comply with the standard (e.g., if the manufacturer chose not to apply ATI or chose tires with higher rolling resistance levels) as long as the performance of the other subfamilies over-comply with the standard (e.g., if the manufacturer applied higher-performing skirts) such that the average of all of the subfamilies' FELs met or did better than the stringency for that family on a production-weighted basis. Section IV.F.6.a below further discusses how the proposed averaging program would function for any such trailer subfamilies.

#### b) Submitting a Certification Application and Request for a Certificate to EPA

Once the preliminary steps are completed, the manufacturer can prepare and submit applications to EPA for certificate of conformity for each of its trailer families. The contents of the application are specified in 40 CFR 1037.205, though not all items listed in the regulation are applicable to each trailer manufacturer.

For the early years of the program (*i.e.*, 2018 through 2020), the application must specify whether the

trailer manufacturer is opting into the NHTSA voluntary program to ensure the information is transferred between the agencies. It must also include a description of the emission controls that a manufacturer intends to offer. These emission controls could include aerodynamic features, tire models, tire inflation systems or components that qualify for weight reduction. Basic information about labeling, warranty, and recommended maintenance should also be included the application (see Section IV.F.5 for more information).

The manufacturer would also provide a summary of the plans to comply with the standard. This information would include a description of the trailer family and subfamilies (if applicable) covered by the certificate and projected sales of its products. Manufacturers that do not participate in averaging would include information on the lowest level of CO<sub>2</sub> and fuel consumption performance offered in the trailer family. Manufacturers that choose to average within their families would include performance information for the projected highest production trailer configuration, as well as the lowest and the highest performing configurations within that trailer family.

#### (c) End-of-Year Obligations

After the end of each year, all manufacturers would need to submit a report to the agencies presenting production-related data for that year (see 40 CFR 1037.250 and 49 CFR 535.8). In addition, manufacturers participating in the averaging program would submit an end-of-year report containing both emissions and fuel consumption information for both agencies. This report would include the year's final compliance data (as calculated using the compliance equation) and actual sales in order to demonstrate that the trailers either met the standards for that year or that the manufacturer generated a deficit to be reconciled within the next three years under the averaging provisions (see 40 CFR 1037.730, 40 CFR 1037.745, and 49 CFR 535.7). All certifying manufacturers would need to maintain records of all the data and information required to be supplied to EPA and NHTSA for eight years.

#### (3) Trailer Certification Test Protocols

The Clean Air Act specifies that compliance with emission standards for motor vehicles be demonstrated using emission test data (see CAA section 206(a) and (b)). The Act does not require the use of specific technologies or designs. The agencies are proposing that the compliance equation shown in

would then share them with NHTSA. Obtaining an approved certificate of conformity from EPA is the first step in complying with the NHTSA program.

<sup>243</sup> Trailers that meet the qualifications for exclusion do not require a certificate of conformity and manufacturers do not have to submit an application to EPA for these trailers.

<sup>244</sup> The agencies are proposing that manufacturers implement 100 percent of their non-box and special purpose box trailers with automatic tire inflation systems and tires meeting the specified rolling resistance levels. As a result, averaging provisions do not apply to these trailer subcategories.

Section IV. F. (1) function as the official “test procedure” for quantifying CO<sub>2</sub> and fuel consumption performance for trailer compliance and certification (as opposed to GEM, which serves this function in the tractor and vocational vehicle programs). Manufacturers would insert performance information from the trailer technologies applied into the equation in order to calculate their impact on overall trailer performance. The agencies are proposing to assign performance levels to ATI systems and specific weight reduction values to predetermined component substitutions. Aerodynamic and tire rolling resistance performance would be obtained by the trailer manufacturers. The following sections describe the approved performance tests for tire rolling resistance and aerodynamic drag. Non-box and non-aero box trailers have tire requirements only. Manufacturers of these trailers will only need to obtain results from the tire performance tests. Long and short box trailers are expected to use aerodynamic and tire technologies to meet the proposed standards and will need to obtain test results from both procedures. See generally proposed 40 CFR part 1037, subpart F, for full description of the proposed performance tests, and see in particular proposed section 40 CFR 1037.515.

#### (a) Trailer Tire Performance Testing

Under Phase 1, tractor and vocational chassis manufacturers are required to input the tire rolling resistance coefficient into GEM and the agencies adopted the provisions in ISO 28580:2009(E)<sup>245</sup> to determine the rolling resistance of tires. As described in 40 CFR 1037.520(c), this measured value, expressed as  $C_{RR}$ , is required to be the result of at least three repeat measurements of three different tires of a given design, giving a total of at least nine data points. Manufacturers specify a  $C_{RR}$  value for GEM that may not be lower than the average of these nine results. Tire rolling resistance may be determined by either the vehicle or tire manufacturer. In the latter case, the tire manufacturer would provide a signed statement confirming that it conducted testing in accordance with this part.

Similar to the tractor program, we propose to extend the Phase 1 testing provisions for tire rolling resistance to apply to the Phase 2 box trailer program, only without requiring the use of GEM. The average rolling resistance value obtained from this test would be used to

specify the tire rolling resistance level (TRRL) for the trailer tires in the compliance equation. Based on the current practice for tractors, we expect the trailer manufacturers to obtain these data from tire manufacturers. We welcome comments regarding the proposed tire testing provisions as they relate to the proposed trailer program.

For non-box trailers, the agencies are proposing to use the same test methods to evaluate tires, but are proposing to apply a single threshold standard instead of inputting the rolling resistance value into the GEM equation. Manufacturers of non-box trailers would comply with the rolling resistance standard by using tires with rolling resistance below the threshold. From the perspective of the trailer manufacturer, this would be equivalent to a design standard for the trailers, even though the standard would be expressed as a performance standard for the tires.

The agencies are considering adopting a program for tire manufacturers similar to the provision described in Section IV. F. (3) (b)(iv) for aerodynamic device manufacturers. For aerodynamic devices, the agencies are proposing to allow device manufacturers to seek preliminary approval of the performance of their devices. Device manufacturers would perform the required testing of their device and submit the performance results directly to EPA. We are requesting comment on a similar provision for tires. Tire manufacturers could submit their test data directly to EPA to show they meet the rolling resistance requirements, and trailer manufacturers that choose to use approved tires would merely indicate that in their the certification applications.

EPA is also considering adopting regulatory text addressing obligations for tire manufacturers. We note that CAA section 207(c)(1) requires “the manufacturer” to remedy certain in-use problems and does not limit this responsibility to certificate holders. The remedy process is generally called recall, and the regulations for this process are in 40 CFR part 1068, subpart F. In the case of in-use problems with trailer tires, EPA is requesting comment on adding regulatory text that would explicitly apply these provisions to tire manufacturers. In other words, if EPA determines that tires on certified trailers do not conform to the regulations in actual use, should EPA require the tire manufacturer to recall and replace the nonconforming tires?<sup>246</sup>

#### (b) Trailer Aerodynamic Performance Testing

Our proposed trailer aerodynamic test procedures are based on the current and proposed tractor procedures for testing aerodynamic control devices, including coastdown, constant speed, wind tunnel, and computational fluid dynamics (CFD) modeling. The purpose of the tests is to establish an estimate of the aerodynamic drag experienced by a tractor-trailer vehicle in real-world operation. In the tractor program, the resulting CdA value represents the aerodynamic drag of a tested tractor assumed to be pulling a specified standard trailer. In the proposed trailer program, the  $C_{DA}$  value used in the compliance equation would represent the tested trailer pulled by a standard tractor.

To minimize the number of tests required, the agencies are proposing that devices for long trailers be evaluated based on 53-foot trailers, and that devices for short trailers be evaluated based on 28-foot trailers. Details of the test procedures can be found in 40 CFR 1037.525 and a discussion of EPA’s aerodynamic testing program as it relates to the proposed trailer program are provided in the draft RIA Chapter 3.2. The following sections outline the testing requirements proposed for the long term trailer program, as well as simpler testing provisions that would apply in the nearer term.

#### (i) A to B Testing for Trailer Aerodynamic Performance

A key difference between the proposed tractor and trailer programs is that while the tractor procedures provide a direct measurement of an absolute  $C_{DA}$  value for each tractor model, the agencies expect a majority of the aerodynamic improvements for trailers will be accomplished by adding bolt-on technologies. As a result, we are proposing to evaluate the aerodynamic improvements for trailers by measuring a change in  $C_{DA}$  (delta  $C_{DA}$ ) relative to a baseline. Specifically, we propose that the trailer tests be performed as “A to B” tests, comparing the aerodynamic performance of a tractor-trailer without a trailer aerodynamic device to one with the device installed. See Draft RIA Chapter 2.10 for more information on this approach.

As mentioned in Section IV. F. (1) that is consistent with the compliance

manufacturers of other heavy-duty vehicle components. This is because, for the trailer sector, we believe that the small business trailer manufacturers that make up a large fraction of companies in this industry could be uniquely challenged if they needed to recall trailers to replace tires.

<sup>245</sup> See [http://www.iso.org/iso/iso\\_catalogue/catalogue\\_tc/catalogue\\_detail.htm?csnumber=44770](http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=44770).

<sup>246</sup> EPA is considering such a requirement for trailer tire manufacturers, but not at this time for

equations. See 40 CFR 1037.525 and 49 CFR 535.6. We believe that most trailers longer than 50 feet with comparable technologies would perform similarly in aerodynamic testing. We also recognize that devices used on some lengths of trailers in the short-van category may perform differently than those devices perform when used on a representative 28-foot test trailer.

The agencies are proposing that manufacturers have some flexibility in the devices (or packages of devices) that they use with box vans that have lengths different than those of the trailers on which the devices/packages were tested (*i.e.*, trailers not 53 or 28 feet long). In such situations, a manufacturer could use devices that they believe would be more appropriate for the length of the trailer they are producing, consistent with good engineering judgement. For example, they could use longer or shorter side skirts than those tested on 53- or 28-foot trailers. No additional testing would be required in order to validate the appropriateness of using the alternate devices on these trailers.

On average, we believe that testing of a device on a 28-foot test trailer would provide a conservative evaluation of the performance of that device on other lengths of short box trailers. We believe that the proposed compliance approach would effectively represent the performance of such devices on the majority of short van trailers, yet would limit the number of trailers a manufacturer would need to track and evaluate. We request comment, including data where possible, on additional approaches that could be used to address this issue of varying performance for devices across the range of short van lengths. Commenters supporting an allowance or requirement to test devices on short van trailers of other lengths than 28 feet are encouraged to also address how the agencies should consider such a provision in setting the levels of the standards, as well as how any additional compliance complexity would be justified.

The agencies note that it was relatively straightforward in Phase 1 to establish a standard trailer with enough specificity to ensure consistent testing of tractors, since there are relatively small differences in aerodynamic performance of base-model dry van trailers. However, as discussed in Chapter 2.10 of the draft RIA, small differences in tractor design can have a significant impact on overall tractor-trailer aerodynamic performance. An advantage of an A to B test approach for trailers is that many of the differences in tractor design are canceled-out,

which allows a variety of standard tractors to be used in testing without compromising the evaluation of the trailer aerodynamic technology. Thus, the relative approach does not require the agencies to precisely specify a standard tractor, nor does it require trailer manufacturers to purchase, modify or retain a specific tractor model in order to evaluate their trailers.

In essence, an A to B test is a set of tests: one test of a baseline tractor-trailer with zero trailer aerodynamic technologies (A), and one test that includes the aerodynamic devices to be tested (B). However, because an A test would relate to a B test only with respect to the test method and the test trailer length, one A test could be used for many different B tests. This type of testing would result in a delta  $C_{DA}$  value instead of an absolute  $C_{DA}$  value. For the trailer program, the vehicle configuration in the A test would include a standard tractor that meets specified characteristics,<sup>247</sup> and a manufacturer's baseline trailer with no aerodynamic improvements. The entity conducting the testing (*e.g.*, the trailer manufacturer or the trailer aerodynamic device manufacturer, as discussed below) would perform the test for this configuration according to the procedures in 40 CFR 1037.525 and repeat the test for the B configuration, which includes the trailer aerodynamic package/device(s) being tested. The delta  $C_{DA}$  value for that trailer with that device would be the difference between the  $C_{DA}$  values obtained in the A and B tests.

In the event that a trailer manufacturer makes major changes to the aerodynamic design of its trailer in lieu of installing add-on devices, trailer manufacturers would use the same baseline trailer for the A configuration as would be used for bolt-on features. In both cases, the baseline trailer would be a manufacturer's standard box trailer. Thus, the manufacturer of a redesigned trailer would get full credit for any aerodynamic improvements it made. We request comment on this issue. In addition, we request comment on how the program could handle a situation in which a manufacturer made aerodynamic design changes to a trailer between 28 and 50 feet, which as proposed could only be compared to a 28-foot standard trailer.

The agencies are proposing to determine the delta  $C_{DA}$  for trailer aerodynamics using the zero-yaw (or

head-on wind) values. The agencies are not proposing a reference method (*i.e.*, the coastdown procedure in the tractor program). Instead, we are proposing to allow manufacturers to perform any of the proposed test procedures to establish a delta  $C_{DA}$ . Since the proposed coastdown and constant speed procedures include wind restrictions, we are proposing to only accept the zero-yaw values from aerodynamic evaluation techniques that are capable of measuring drag at multiple yaw angles (*e.g.*, wind tunnels and CFD) to allow cross-method comparison and certification. The agencies welcome comment on the pros and cons of exclusive use of zero-yaw data from trailer aerodynamic compliance testing. We recognize that the benefits of aerodynamic devices can be higher when measured considering wind from other yaw angles. We request comment on the possibility of allowing manufacturers to use wind-averaged results for compliance if they choose to test using procedures that provide wind-averaged values. Chapter 2.10 of the draft RIA compares zero-yaw and wind-averaged results from EPA's wind tunnel testing. We request that commenters provide test data to support any preference for compliance test results. We also request comments on strategies that could be used to maintain consistency with other methods that cannot provide wind-averaged results.

#### (ii) Standard Tractor for Aerodynamic Testing in the Proposed Trailer Program

We propose that the proposed compliance equation, based on GEM, be used to determine compliance with the trailer standards. Our discussion of the feasibility of our proposed standards (Section IV. D. (3) (a)) includes a description of the tractor-trailer vehicle used in GEM. We recognize the impact of the tractor and want to maintain consistency with GEM, but for the trailer program it is not necessary to address all aspects (*e.g.*, the engine) of the tractor, because, as explained above, the impact of many of its features will be canceled-out with the use of an A to B test strategy. However, some aerodynamic design features of the tractor can influence the performance of trailer aerodynamic technologies and we want to ensure a level of consistency between tests of different trailer manufacturers.

The agencies believe the A to B test strategy would reduce the degree of precision with which the standard tractor needs to be specified. Instead of identifying a specific make and model of a tractor to be used over the entire duration of the program, the agencies

<sup>247</sup> As explained in Section IV. F. (3) (b)(ii), the standard tractor in GEM consists of a high roof sleeper cab for box trailers longer than 50 feet and a high roof day cab for box trailers 50 feet and shorter.



would instead identify key characteristics of a standard tractor. EPA’s trailer testing program investigated the impact of tractor aerodynamics on the performance of trailer aerodynamic technologies, as mentioned in Chapter 2.10 of the draft RIA. In order to maintain a minimal level of performance, we are proposing that tractors used in trailer aerodynamic tests meet Phase 2 Bin III or better tractor requirements (see Section III.D.). We believe the majority of tractors in the U.S. trucking fleet will be Bin III or better in the timeframe of this rulemaking, and trailer manufacturers have the option to choose higher-performing tractors in later years as tractor technology improves. The standard tractor for long-box trailers is a Class 8 high-roof sleeper cab. The standard tractor for short box trailers is a Class 8 high roof day cab. Trailer manufacturers are free to choose any standard tractor that meets these criteria in their aerodynamic performance testing. See 40 CFR 1037.501.

(iii) Bins for Aerodynamic Performance

As mentioned in Section IV. D. (1) (a), the agencies are proposing aerodynamic bins to account for testing variability and to provide consistency in the performance values used for compliance. These bins were developed in terms of delta C<sub>D</sub>A ranges, and designed to be broad enough to cover the range of uncertainty seen in our aerodynamic testing program in terms of test-to-test variability as well as variability due to differences in test method, tractor models, trailer models and device models.

As discussed in Chapter 2.10 of the draft RIA, measured drag coefficients and drag areas vary depending on the test method used. In general, values measured using wind tunnels and CFD tend to be lower than values measured using the coastdown method. The Phase 1 and proposed Phase 2 tractor program use coastdown testing as the reference test method, and the agencies require tractor manufacturers to perform at least one test using that method to establish a correction factor (called “F<sub>alt,aero</sub>”) to apply to any of the alternative test methods. For simplicity, the agencies are not proposing a similar approach for trailers. We believe that the size of the bins and the use of change in C<sub>D</sub>A (as opposed to absolute values) would minimize the significance of this variability. However, we recognize that this could be a problem in instances where a manufacturer using a method other than coastdown produces a trailer with performance near the upper end of a bin. In such cases, it is possible that

adjusting for methodological differences using a F<sub>alt,aero</sub> would allow the manufacturer to achieve a more stringent bin.

We request comment on the proposed approach for evaluating performance of trailers and establishing bins for trailer compliance. We specifically request that commenters address the need for an aerodynamic reference test for trailer performance or additional strategies for normalizing test methods. For example, would it be appropriate to allow all manufacturers using wind tunnel or CFD methods to apply an assigned F<sub>alt,aero</sub> of 1.10, or another value, to their results?

TABLE IV–29—AERODYNAMIC BINS USED TO DETERMINE INPUTS FOR TRAILER CERTIFICATION

Delta C <sub>D</sub> A measured in testing	Bin	Average delta C <sub>D</sub> A input for gem
0.09 .....	Bin I .....	0.0
0.10–0.19 .....	Bin II .....	0.1
0.20–0.39 .....	Bin III .....	0.3
0.40–0.59 .....	Bin IV .....	0.5
0.60–0.79 .....	Bin V .....	0.7
0.80–1.19 .....	Bin VI .....	1.0
1.20–1.59 .....	Bin VII .....	1.4
≥ 1.6 .....	Bin VIII .....	1.8

A manufacturer that wished to perform testing would first identify a standard tractor (according to 40 CFR 1037.525) and a representative baseline trailer with no aerodynamic features, then perform the A to B tests with and without aerodynamic devices and obtain a delta C<sub>D</sub>A value. The manufacturer would use Table IV–29 to determine the appropriate bin based on their delta C<sub>D</sub>A. Each bin has a corresponding average delta C<sub>D</sub>A value which is the value manufacturers insert into the compliance equation.

(iv) Aerodynamic Device Testing Alternative

The agencies recognize that much of the trailer manufacturing industry may have little experience with aerodynamic performance testing. As such, we are proposing an alternative compliance option that we believe will minimize the testing burden for trailer manufacturers, meet the requirements of the Clean Air Act and of EISA, and provide reasonable assurance that the anticipated CO<sub>2</sub> and fuel consumption benefits of the program will be realized in real-world operation.

The agencies are proposing to allow trailer aerodynamic device manufacturers to seek preliminary approval of the performance of their

devices (or combinations of devices) based on the same performance tests described previously in Section IV. F. (3) (b)(i). Device manufacturers would perform the required A to B testing of their device(s) on a trailer that meets the requirements specified in 40 CFR 1037.211 and 1037.525 and submit the performance results, in terms of delta C<sub>D</sub>A, directly to EPA.<sup>248</sup> Trailer manufacturers could then choose to use these devices and apply their performance levels in the certification application for their trailer families. This approach would provide an opportunity for trailer manufacturers to choose technologies with pre-approved test data for installation on their new trailers without performing their own aerodynamic testing. We note that this proposed testing alternative is consistent with recommendations of the SBAR Panel. The Panel Report is summarized below in Section XV.D.

If trailer manufacturers wish to use multiple devices with pre-approved test data, the proposed program provides a process for combining the effects of multiple devices to determine an appropriate delta C<sub>D</sub>A value for compliance. More specifically, such manufacturers would fully count the technology with largest delta C<sub>D</sub>A value, discount the second by 10 percent, and discount each of the remaining additional technologies by 20 percent.<sup>249</sup> This discounting would acknowledge the complex interactions among individual aerodynamic devices and would provide a conservative value for the impact of the combined devices. For example, a manufacturer applying three separately tested devices with delta C<sub>D</sub>A values of 0.40, 0.30, and 0.10 would calculate the combined delta C<sub>D</sub>A as:

Delta C<sub>D</sub>A = 0.40 + 0.90\*0.30 + 0.80\*0.10 = 0.75 m<sup>2</sup>

In addition, the agencies believe that discounting the delta C<sub>D</sub>A values of individually-tested devices used as a combination would provide a modest incentive for trailer or device manufacturers to test and get EPA pre-approval of the combination as an aerodynamic system for compliance. We propose that device manufacturers be

<sup>248</sup> Note that in the event a device manufacturer chooses to submit such data to EPA, it could incur liability for causing a regulated entity to commit a prohibited act. See 40 CFR 1068.101(c). This same potential liability exists with respect to information provided by a device manufacturer directly to a trailer manufacturer.

<sup>249</sup> A trailer manufacturer would need to use good engineering judgement in combining devices for compliance in order to avoid combinations that are not intended to work together (e.g., both a side skirt and an under-body device).

allowed to test and receive EPA pre-approval for combinations of devices, and that trailer manufacturers that wish to use those specific combinations be allowed to use the results from the tests of the combined devices.

The agencies note that many of the largest box trailer manufacturers are already performing aerodynamic test procedures to some extent, and the agencies expect other box trailer manufacturers will increasingly be capable of performing these tests as the program progresses.

The proposed alternative testing approach is intended to allow trailer manufacturers to focus on and become familiar with the certification process in the early years of the program and, if they wish, begin to perform testing in the later years, when it may be more appropriate for their individual companies. This approach would not preclude trailer manufacturers from performing their own testing at any time, even if the technologies they wish to install are already pre-approved. For example, a manufacturer that believed a specific trailer actually performed in a more synergistic manner with a given device than the device's pre-approved delta  $C_{DA}$  value suggested could perform its own testing and submit the results to EPA for certification. The process to obtain approval is outlined in the proposed 40 CFR 1037.211.

#### (4) Use of the Compliance Equation for Trailer Compliance

The agencies are proposing standards for non-box and non-aero box trailers requiring the use of tires with rolling resistance levels at or below a threshold, and on ATI systems. As part of their certification application, manufacturers of these trailers would submit their tire rolling resistance levels and a description of their ATI system(s) to EPA. As long as the trailer manufacturer certifies that they will install the appropriate tires and ATI systems on all of their trailers, the agencies do not believe it is necessary to require these trailer manufacturers to use the equation and report the results of the model to the agencies to demonstrate compliance.

Box trailer manufacturers who apply more than tire technologies to meet the standards would use the compliance equation to combine the effects of these technologies and quantify the overall performance of the vehicle to demonstrate compliance. Trailer manufacturers would obtain delta  $C_{DA}$  and tire rolling resistance values from testing (either from their own testing or testing performed by another entity as described previously) and note if they installed a qualifying automatic tire

inflation system or made a component substitution that qualifies for weight reduction. Manufacturers would directly apply the delta  $C_{DA}$  and TRRL values into the equation, which would also recognize the use of an ATI system, applying a 1.5 percent reduction in  $CO_2$  and fuel consumption. Qualifying components for weight reduction can be found in 40 CFR 1037.515(d). Manufacturers that substitute one or more of these components on their box trailers would sum the weight reductions assigned to each component and enter that total into the equation. The equation would also account for the use of weight-reducing components, assigning one-third of that reduced weight to increase the payload and the remaining weight reduction to reduce the overall weight of the assumed vehicle.

For this proposal, we are requiring that the equation be used if the manufacturer is to take advantage of the agencies' proposed averaging provisions. Prior to submitting a certificate application, manufacturers would decide which technologies to make available for their customers and use the equation to determine the range performance of the packages they will offer. Manufacturers would supply these results from the equation in their certificate application and those manufacturers that wish to perform averaging would continue to calculate emissions (and fuel consumption) with the equation throughout the model year and keep records of the results for each trailer package sold. As described in Section IV.F.2.c above, at the end of the year, manufacturers would submit two reports. One report would include their production volumes for each configuration. The second report, required for manufacturers using averaging, would summarize the families and subfamilies, and  $CO_2$  emissions and fuel consumption results from the equation for all of the trailer configurations they build.<sup>250</sup>

Box trailer manufacturers that do not participate in averaging would also use the compliance equation to ensure that all of the trailer configurations they offer would meet the standard for the given model year. These calculations using the equation could be performed by the manufacturer prior to submitting a

certificate application, but it is not necessary for the manufacturer to continue to calculate emissions and fuel consumption throughout the model year unless a new technology package is offered. These manufacturers would submit a single end-of-year report that would include their production volumes and confirmation that all of their trailers applied the technology packages outlined in their application.

#### (5) Additional Certification and Compliance Provisions

##### (a) Trailer Useful Life

Section 202(a)(1) of the CAA specifies that EPA is to propose emission standards that are applicable for the "useful life" of the vehicle. NHTSA also proposes to adopt EPA's useful life requirements for trailers to ensure manufacturers consider in the design process the need for fuel efficiency standards to apply for the same duration and mileage as EPA standards. Based on our own research and discussions with trailer manufacturers, EPA and NHTSA are proposing a regulatory useful life value for trailers of 10 years. This useful life represents the average duration of the initial use of trailers, before they are moved into less rigorous (e.g., limited use or storage) duty. We note that the useful life value is 10 years for other heavy-duty vehicles. However, unlike the other vehicles, we are not proposing to set a mile value for trailers because we do not require odometers for trailers.

Thus, we propose that trailer manufacturers be responsible for meeting the  $CO_2$  emissions and fuel consumption standards for 10 years after the trailer is produced. We believe that manufacturers would be able to demonstrate at certification that their trailers will comply for the useful life of the trailers without durability testing. The aerodynamic technologies that we expect manufacturers to use to comply with the proposed standards, including side skirts and boat tails, are designed to continue to provide their full potential benefit indefinitely as long as no serious damage occurs. See also Section IV.C.6 above describing why we are not proposing separate in-use standards.

Regarding trailer tires, we recognize that the original lower rolling resistance tires will wear over time and will be replaced several times during the useful life of a trailer, either with new or retreaded tires. As with the Phase 1 tractor program, to help ensure that trailer owners have sufficient knowledge of which replacement tires to purchase in order to retain the as-certified emission and fuel consumption

<sup>250</sup> We are not proposing to allow manufacturers to "bank" credits to the following year if a manufacturer over-complies on average for a given model year. We are proposing to allow manufacturers to generate temporary deficits if they under-comply on average. These deficits would need to be resolved within three model years. See Section IV.F.7.a below and 40 CFR 1037.250, 40 CFR 1037.730, and 49 CFR 535.7.

performance of their trailer for its useful life, we are proposing to require that trailer manufacturers supply adequate information in the owner's manual to allow the trailer owner to purchase replacement tires meeting or exceeding the rolling resistance performance of the original equipment tires. We believe that the favorable fuel consumption benefit of continued use of LRR tires would generally result in proper replacements throughout the 10-year useful life. Finally, we are requiring that ATI systems remain effective for at least the 10 year useful life, although some servicing may be necessary. See the maintenance discussion in Section IV.D.4.e.

#### (b) Emission Control Labels

Historically, EPA-certified vehicles are required to have a permanent emission control label affixed to the vehicle. The label facilitates the identification of the vehicle as a certified vehicle. For the trailer program, EPA proposes that the labels include the same basic information as we are proposing to require for tractor labels. For trailers, this information would include the manufacturer, a trailer identifier such as the Vehicle Identification Number, the trailer family and regulatory subcategory, the date of manufacture, and compliance statements. Although the proposed Phase 2 label for tractors would not include emission control system identifiers (as previously required for tractors in the Phase 1 program in 40 CFR 1037.135(c)(6)), we are proposing that these identifiers be included in the trailer labels. As for tractors, we would require manufacturers to maintain records that would allow us to verify that an individual trailer was in its certified configuration.

#### (c) Warranty

Section 207 of the CAA requires manufacturers to warrant their products to be free from defects that would otherwise cause non-compliance with emission standards. For purposes of the proposed trailer program, EPA would require trailer manufacturers to warrant all components that form the basis of the certification to the CO<sub>2</sub> emission standards. The emission-related warranty would cover all aerodynamic devices, lower rolling resistance tires, automatic tire inflation systems, and other components that may be included in the certification application.

The trailer manufacturer would need to warrant that these components and systems are designed to remain functional for the warranty period. Based on the historical practice of

requiring emissions warranties to apply for half of the useful life, we propose that the warranty period for trailers be 5 years for everything except tires. For trailer tires, we propose to apply a warranty period of 1 year. Manufacturers could offer a more generous warranty if they chose; however the emissions related warranty may not be shorter than any other warranty offered without charge for the vehicle. If aftermarket components were installed (unrelated to emissions performance) that offer a longer warranty, this would not impact emission related warranty obligations of the vehicle manufacturer. NHTSA is not proposing any warranty requirements relating to its trailer fuel consumption program.

At the time of certification, manufacturers would need to supply a copy of the warranty statement that they would supply to the end customer. This document would outline what is covered under the GHG emissions related warranty as well as the duration of coverage. Customers would also have clear access to the terms of the warranty, the repair network, and the process for obtaining warranty service.

#### (d) Maintenance

In general, EPA requires that vehicle manufacturers specify maintenance schedules to keep their product in compliance with emission standards throughout the useful life of the vehicle (CAA section 207). For trailers, such maintenance could include fairing adjustments or service to ATI systems. However, EPA believes that any such maintenance is likely to be performed by operators to maintain the fuel savings of the components, and we are not proposing that trailer manufacturers be required submit a maintenance schedule for these components as part of its application for certification.

Since low rolling resistance tires are key emission control components under this program, and will likely require replacement at multiple points within the life of a vehicle, it is important to clarify how tires would fit into the emission-related maintenance requirements. Although the agencies encourage the exclusive use of LRR tires throughout the life of trailers vehicles, we do not propose to hold trailer manufacturers responsible for the actions of operators. We do not see this as problematic because we believe that trailer operators have a genuine financial motivation for ensuring their vehicles are as fuel efficient as possible, which includes purchasing LRR replacement tires. Therefore, as mentioned in Section IV.F.5.a above, to

help ensure that trailer owners have sufficient knowledge of which replacement tires to purchase in order to retain the as-certified emission and fuel consumption performance of their trailer, we are proposing to require that trailer manufacturers supply adequate information in the owner's manual to allow the trailer owner to purchase tires meeting or exceeding the rolling resistance performance of the original equipment tires. We would require that these instructions be submitted to EPA as part of the application for certification.

#### (e) Post-Useful Life Modifications

Under 40 CFR part 1037, EPA generally prohibits for any person from removing or rendering inoperative any emission control device installed to comply with the requirements of 40 CFR part 1037. However, in 40 CFR 1037.655 EPA clarifies that certain vehicle modifications are allowed after a vehicle reaches the end of its regulatory useful life. EPA is proposing for this section to apply trailers, since it applies to all vehicles subject to 40 CFR part 1037, and requests comment on it.

Generally, this section clarifies that owners may modify a vehicle for the purpose of reducing emissions, provided they have a reasonable technical basis for knowing that such modification will not increase emissions of any other pollutant. In the case of trailers, this essentially requires a trailer owner to have information that would lead an engineer or other person familiar with trailer design and function to reasonably believe that the modifications will not increase emissions of any regulated pollutant. Thus, this provision does not provide a blanket allowance for modifications after the useful life.

This section does not apply with respect to modifications that occur within the useful life period, other than to note that many such modifications to the vehicle during the useful life are presumed to violate 42 U.S.C. 7522(a)(3)(A). EPA notes, however, that this is merely a presumption, and would not prohibit modifications during the useful life where the owner clearly has a reasonable technical basis for knowing the modifications would not cause the vehicle to exceed any applicable standard.

#### (6) Flexibilities

The trailer program that the agencies are proposing incorporates a number of provisions that would have the effect of providing flexibility and easing the compliance burden on trailer manufacturers while maintaining the

expected CO<sub>2</sub> and fuel consumption benefits of the program. Among these is the basic approach we used in setting the proposed standards, including the staged phase-in of the standards, which would gradually increase the CO<sub>2</sub> and fuel consumption reductions that manufacturers would need to achieve over time as they also increase their experience with the program. As described in the general certification discussion above (Section IV.F.2), another proposed provision would allow trailer manufacturers to designate broad trailer families that would aggregate several models with similar technologies or performance, thus potentially limiting the number of families and the associated family-level compliance requirements.

In addition to these provisions inherent to the proposed trailer program, the agencies are proposing additional options for certification that we believe would be very valuable to many trailer manufacturers. One of these is the proposed process for component manufacturers to submit test data directly to EPA for review by the agencies in advance of formal certification, allowing a trailer manufacturer to reduce the amount of testing needed to demonstrate compliance or avoid it altogether. See Section IV.F.4 above.

#### (a) Proposed Averaging Provisions

The agencies are also proposing a limited averaging program as a part of the trailer compliance process for box trailers. This program would be similar to the Phase 1 averaging program for other sectors, but would be narrower in scope to reflect the unique competitive aspects of the trailer market. The trailer manufacturing industry is very competitive, and manufacturers must be highly responsive to their customers' diverse demands. Compared to other industry sectors, this reality can limit the value of the flexibility that averaging could provide to trailer manufacturers, since they can have little control over what kinds of trailer models their customers demand and thus limited ability to manage the mix and volume of different products. In addition, the majority of trailer manufacturers have very few basic trailer models to offer, potentially putting them at a competitive disadvantage to the small number of larger companies that would be in a position to meet market demands that the smaller companies could not. For example, one of the larger, more diverse manufacturers could potentially supply a customer with trailers that had few if any aerodynamic features, while offsetting this part of their business with

over-complying trailers that they were able to sell to another customer; many smaller companies with limited product offerings might not be able to compete for those customers.

Although we recognize that there might be potential negative impacts on at least some trailer manufacturers of an averaging program, we believe that there may be overall value to such a program. We propose that full-aero box trailer manufacturers may optionally comply with their standards on average for a trailer family in any given model year. We are not proposing to allow partial-aero box trailers to average. Instead, all trailers in partial-aero families would need to meet the standard for that subcategory. We are proposing to allow a trailer manufacturer to combine partial-aero box trailers with the corresponding full-aero trailer family and reduce the number of certification applications required. We expect this to be particularly beneficial to manufacturers in the early years of the program, when these two trailer categories have identical standards. Although this option should reduce the compliance paperwork, the partial-aero trailers would not be able to adopt enough technologies to meet the full-aero standards in the later years, and manufacturers would have the option of creating a separate family for these trailers. Additionally, we are proposing to allow refrigerated trailers to combine with the dry vans of the same length and meet the dry van standards and to allow short box vans to combine with their long box counterparts to meet the long box standards.

Unlike averaging programs in other sectors, including those in this Phase 2 program, we propose that averaging be limited to a single model year, and manufacturer not be allowed to "bank" credits generated from over-compliance in one year for use in a future year. In other words, a manufacturer that produces some trailers in a family that perform better than required by the applicable standard would be allowed to produce a number of trailers that do not meet the standards, provided the average of the trailers it produces in any given model year is at or below the standards. A trailer family performing better than the standard would not be allowed to bank credits for a future model year.<sup>251</sup> However, as a temporary recourse for unexpected challenges in a

given model year, we propose that manufacturers be allowed to generate a deficit that would be resolved within the next three model years, and to allow the manufacturer to use credits they generate from over-compliance in subsequent years to address deficits from prior model years. As discussed below, we are not proposing this allowance for non-box trailers or non-aero trailers.

We recognize that at each stage of the program, there may be a small fraction of trailer applications for which the trailer manufacturers cannot easily apply all of the aerodynamic and tire technologies. Thus the proposed dry and refrigerated van standards are designed in the form of family average performance, meaning that each trailer manufacturer would comply on average across the trailer families it produces within each subcategory category (or family). The proposed program would allow a manufacturer, for example, to comply without full adoption of aerodynamic devices across 100 percent of its box trailer production in a trailer family, as long as it also produced a sufficient number of trailers within that family that performed better than the standard, such that the overall production-weighted CO<sub>2</sub> and fuel consumption results of the trailer models in that family complied with the appropriate standard.

In addition to the flexibility created by averaging, the proposed box trailer standards themselves are not predicated on a set adoption rate of any one technology. Manufacturers would be free under the proposed averaging program to choose to apply the appropriate number and type of technologies that met their customers' needs and the level of performance required within a particular trailer family. The proposed rules in general do not mandate inclusion of any particular technology or other means of emission control. The agencies believe that, ordinarily, averaging would create an incentive for manufacturers to promote high-performing technologies for some customers, beyond the requirements for that given year, in order to provide other customers with trailers with fewer aerodynamic technologies.

The agencies also recognize, however, that an averaging program would inherently require a higher degree of data management, record keeping, and reporting than one without averaging. Recognizing that this could impose burdens, especially on small business manufacturers, the agencies are proposing that the averaging provisions be optional; a box trailer manufacturer could choose whether to use averaging

<sup>251</sup> Section IV.F.2 describes the process of identifying trailer families and sub-families based on basic trailer characteristics. Section 1037.710 of the proposed regulations describes the provisions for establishing subfamilies within a trailer family and the Family Emission Limits that would be averaged among the subfamilies.

for any or all of its standard box trailer subcategories (families), or to forego averaging and simply meet the standards with 100 percent of the production within each family. Also, unlike some other regulated motor vehicle sectors, we are not proposing that credits from over-compliance be able to be “banked” for use in a later model year, or to be “traded” among trailer manufacturers, since they would exacerbate the competitive issues, especially for small manufacturers, as discussed immediately below. However, we are proposing to apply to trailers the provisions of Phase 1 for tractors that allow for the generation of a compliance deficit that could be resolved over several years. Thus, a manufacturer that chose to use averaging, but by the end of the production year found that a trailer family’s CO<sub>2</sub> and fuel consumption values did not reach that year’s standards, could carry a “deficit” that would need to be resolved by the third year following.

The availability of averaging options also has the potential to be a disadvantage to some companies in a competitive market that is highly customer-driven. During the SBREFA process, several manufacturers expressed concern about their ability to manage their credit balances in a highly competitive market. Many believe that they would have little ability to essentially force their customers to purchase the technology, especially if other manufacturers that had credits were able to sell trailers without the technology. We see this as especially problematic for non-box trailers, which are much more likely to be produced by small businesses, and for which customers may have less interest in fuel savings technologies since they are less often used long-haul applications than are box trailers. For these reasons, we are proposing averaging only for dry and refrigerated vans.

The agencies understand that averaging is unfamiliar to many trailer manufacturers and other stakeholders. We have drafted a supplementary document that includes example scenarios to illustrate the concept of averaging for a hypothetical box trailer manufacturer.<sup>252</sup> Example adoption rates are provided for a standard compliance strategy (no averaging) and a strategy using the proposed averaging provisions.

One value of averaging that the agencies have historically cited in

several other motor vehicle regulatory programs is that the availability of averaging provisions made it possible for the agencies to propose and enact more stringent standards than would otherwise have been appropriate, recognizing that the expected flexibility of averaging provisions would ease the path to compliance by the more challenged members of the industry. In the case of trailer manufacturers, however, our decisions on the proposed stringency of the standards is essentially independent of the presence or absence of averaging, since, as discussed above, averaging provisions may have relatively less value to manufacturers in this customer-driven industry and we did not speculate about much or how little it might be used.

We also request comment on whether the burden of managing an averaging program could be more trouble than the flexibility is worth. In the event that averaging were not allowed, the agencies would need to require that all trailers meeting specified characteristics meet a minimum stringency level without averaging. If we were to finalize such non-averaging standards, manufacturers would still be allowed to select the appropriate technology package that best achieved their emission performance level, but they would not have the ability to accommodate customers that may request trailers that perform less well on an individual trailer basis.

It is also worth noting that the agencies are not proposing to allow any generation of early credits before MY 2018. It is clear to us that small businesses would be less prepared to begin complying early than larger businesses, and that allowing large manufacturers to generate early credits that could be used later could put small businesses at a competitive disadvantage. It does not appear to us that there would be a sufficient broader programmatic benefit from early credits to justify such an adverse impact on small businesses.

We request comment on this proposed averaging option, including whether the program should allow credit and deficit banking and credit trading, as well as on any other potential provisions that could provide compliance flexibility for trailer manufacturers while achieving the goals of the overall program.

Comments supporting averaging, banking, or trading should explain how these provisions would be valuable for trailer manufacturers across the industry, including how the provisions would maintain a “level playing field.”

#### (b) Proposed SmartWay-Based Certification

Since many manufacturers have some experience with the SmartWay program, the agencies are proposing a gradual transition to the proposed approach that recognizes the parallel SmartWay Technology Program. The agencies expect aerodynamic device manufacturers to continue to submit test data to SmartWay for verification. Device manufacturers that also wish to have their technology available for trailer manufacturers to use in the Phase 2 program could, in parallel, submit their test data to EPA for pre-approval for Phase 2 (see Section IV.F.4). The information obtained by EPA from the device manufacturers would include the technology name, a description of its proper installation procedure, and its corresponding delta C<sub>D</sub>A derived from the approved test procedures. Any manufacturers that attained SmartWay verification prior to January 1, 2018 would be eligible to submit their previous data to EPA’s Compliance Division for pre-approval, provided their test results come from SmartWay’s 2014 test protocols that measure a delta C<sub>D</sub>A. The protocols for coastdown, wind tunnel, and computational fluid dynamics analyses result in a C<sub>D</sub>A value. Note that SmartWay’s 2014 protocols allow SAE J1321 Type 2 track testing, which generates fuel consumption results, not C<sub>D</sub>A values. The agencies request comment on whether we should pre-approve devices tested using SAE J1321 and also seek comment on an appropriate means of converting from the fuel consumption results of that test to the delta C<sub>D</sub>A values required for trailer compliance.

Beginning on January 1, 2018, EPA would require that device manufacturers that wish to seek approval of new technologies for trailer certification use one of the approved test methods for Phase 2 (*i.e.*, coastdown, constant speed, wind tunnel or CFD) and the test procedures found in 40 CFR 1037.525. Technologies that were pre-approved using SmartWay’s 2014 Protocols would maintain their approved status until CY 2021. After January 1, 2021, we are proposing that all pre-approved aerodynamic trailer technologies be tested using the Phase 2 test procedures.

#### (c) Off-Cycle Technologies

The Phase 1 and proposed Phase 2 programs for tractors include provisions for manufacturers to request the use of off cycle technologies that are not recognized in GEM or were not in common use before MY 2010. In the

<sup>252</sup> Memorandum dated March 2015 on Example Compliance Scenarios for the Proposed GHG Phase 2 Trailer Program. Docket EPA–HQ–OAR–2014–0827.

case of trailers, the agencies are not aware of any technologies that could improve CO<sub>2</sub> and fuel consumption performance that would not be captured in the test protocols as proposed. We are therefore not proposing a process to evaluate off-cycle trailer technologies.

#### (d) Small Business Regulatory Flexibility Provisions

As a part of our small business obligations under the Regulatory Flexibility Act, EPA and NHTSA have considered additional flexibility provisions aimed at this segment of the trailer manufacturing industry. EPA convened a Small Business Advocacy Review (SBAR) Panel as required by the Small Business Regulatory Enforcement Fairness Act (SBREFA), and much of the information gained and recommendations provided by this process form the basis of the flexibilities proposed.<sup>253</sup> As in previous rulemakings, our justification for including provisions specific to small businesses is that these entities generally have a greater degree of difficulty in complying with the standards compared to other entities. Thus, as discussed below, we are proposing several regulatory flexibility provisions for small trailer manufacturers that we believe would reduce the burden on them while achieving the goals of the program.

We believe that the small business regulatory flexibilities discussed below and in Section XV.C could provide these entities with reduced compliance requirements and/or additional time to accumulate capital internally or to secure capital financing from lenders, and to acquire additional engineering and testing resources.

The agencies designed many of the proposed program elements and flexibility provisions available to all trailer manufacturers with the large fraction of small business trailer manufacturers in mind. We believe the option to choose pre-approved aerodynamic devices would significantly reduce the compliance burden and eliminate the requirement for all manufacturers to perform testing.

As noted above, the small trailer manufacturers raised concerns that their businesses could be harmed by provisions allowing averaging, banking,

and trading of emissions and fuel consumption performance, since they would not be able to generate the same volume of credits as large manufacturers. The agencies are proposing not to include banking and trading provisions in any part of the program, and are limiting the option to average to manufacturers of dry and refrigerated box trailers. Since a majority of non-box trailer manufacturers are small businesses, we believe a requirement of specific tire technologies for all non-box trailers would create the most uniformity in requirements among manufacturers and would reduce the compliance burden by eliminating the use of the compliance equation.

In addition to the provisions offered to trailer manufacturers of all sizes, the agencies are proposing or requesting comment on several additional provisions designed specifically to ease compliance burdens on small trailer manufacturers. For all small business trailer manufacturers, the agencies propose a one-year delay in the beginning of implementation of the program, until MY 2019. We believe (subject to consideration of public comment) that this would allow small businesses additional needed lead-time to make the proper staffing adjustments and process changes, and possibly add new infrastructure to meet the requirements. We also request comment about where there may be circumstances in later stages of the program, when the stringency of the standards increase in MY 2021 and 2024, when a similar 1-year delay in implementation could be warranted for small trailer manufacturers.

As mentioned previously, we are proposing to offer averaging provisions for manufacturers of dry and refrigerated box trailers only. We recognize that the small box trailer manufacturers may not be able to fully take advantage of averaging and may be at a competitive disadvantage with larger manufacturers with larger sales volumes and more diverse product lines. We request comment on additional provisions that could ease the potential harm to and/or incentivize small business participation in an averaging program.

The agencies also request comment on provisions for small manufacturers that might face a situation where the technologies needed for compliance are unavailable. This could be a particular concern for small business non-box and non-aero box trailers that require the use of LRR tires and ATI systems. We request that trailer manufacturers as well as tire and aerodynamic technology

manufacturers provide information regarding the current projected availability of the technologies that trailer manufacturers can use to meet our proposed standards.

#### V. Class 2b–8 Vocational Vehicles

##### A. Summary of Phase 1 Vocational Vehicle Standards

Class 2b–8 vocational vehicles include a wide variety of vehicle types, and serve a wide range of functions. Some examples include service for urban delivery, refuse hauling, utility service, dump, concrete mixing, transit service, shuttle service, school bus, emergency, motor homes, and tow trucks. In the HD Phase 1 Program, the agencies defined Class 2b-8 vocational vehicles as all heavy-duty vehicles that are not included in the Heavy-duty Pickup Truck and Van or the Class 7 and 8 Tractor categories. In effect, the rules classify heavy-duty vehicles that are not a combination tractor or a pickup truck or van as vocational vehicles. Class 2b-8 vocational vehicles and their engines emit approximately 20 percent of the GHG emissions and burn approximately 21 percent of the fuel consumed by today's heavy-duty truck sector.<sup>254</sup>

Most vocational vehicles are produced in a two-stage build process, though some are built from the “ground up” by a single entity. In the two-stage process, the first stage sometimes is completed by a chassis manufacturer that also builds its own proprietary components such as engines or transmissions. This is known as a vertically integrated manufacturer. The first stage can also be completed by a chassis manufacturer who procures all components, including the engine and transmission, from separate suppliers. The product completed at the first stage is generally either a stripped chassis, a cowed chassis, or a cab chassis. A stripped chassis may include a steering column, a cowed chassis may include a hood and dashboard, and a cab chassis may include an enclosed driver compartment. Many of the same companies that build Class 7 and 8 tractors also sell vocational chassis in the medium heavy- and heavy heavy-duty weight classes. Similarly, some of the companies that build Class 2b and 3 pickups and vans also sell vocational chassis in the light heavy-duty weight classes.

<sup>253</sup> Additional information regarding the findings and recommendations of the Panel are available in Section XIV, Chapter 11 of the draft RIA, and in the Panel's final report titled “Final Report of the Small Business Advocacy Review Panel on EPA's Planned Proposed Rule Greenhouse Gas Emissions and Fuel Efficiency Standards for Medium- and Heavy-Duty Engines and Vehicles: Phase 2” (See Docket EPA–HQ–OAR–2014–0827).

<sup>254</sup> See Memorandum to the Docket “Runspects and Model Inputs for MOVES for HD GHG Phase 2 Emissions Modeling” Docket Number EPA–HQ–OAR–2014–0827. See also EPA's MOVES Web page at <http://www.epa.gov/otaq/models/moves/index.htm>.

The second stage is typically completed by a final stage manufacturer or body builder, which installs the primary load carrying device or other work-related equipment, such as a dump bed, delivery box, or utility boom. There are over 200 final stage manufacturers in the U.S., most of which are small businesses. Even the large final stage manufacturers are specialized, producing a narrow range of vehicle body types. These businesses also tend to be small volume producers. In 2011, the top four producers of truck bodies sold a total of 64,000 units, which is about 31 percent of sales in that year.<sup>255</sup> In that same year, 74 percent of final stage manufacturers produced less than 500 units.

The businesses that act both as the chassis manufacturer and the final stage manufacturer are those that build the vehicles from the “ground up.” These entities generally produce custom products that are sold in lower volumes than those produced in large commercial processes. Examples of vehicles produced with this build process would include fire apparatus and transit buses.

The diversity in the vocational vehicle segment can be primarily attributed to the variety of customer needs for specialized vehicle bodies and added equipment, rather than to the chassis. For example, a body builder can build either a Class 6 bucket truck or a Class 6 delivery truck from the same Class 6 chassis. The aerodynamic difference between these two vehicles due to their bodies would lead to different in-use fuel consumption and GHG emissions. However, the baseline fuel consumption and emissions due to the components included in the common chassis (such as the engine, drivetrain, frame, and tires) would be the same between these two types of vehicles.

Owners of vocational vehicles that are upfitted with high-priced bodies that are purpose-built for particular applications tend to keep them longer, on average, than owners of vehicles such as pickups, vans, and tractors, which are traded in broad markets that include many potential secondary markets. The fact that vocational vehicles also generally accumulate far fewer annual miles than tractors further contributes to lengthy trade cycles among owners of these vehicles. To the extent vocational vehicle owners may be similar to owners of tractors in terms of business profiles, they would be more likely to resemble private fleets or owner-

operators than for-hire fleets. A 2013 survey conducted by NACFE found that the trade cycle of private tractor fleets ranged from seven to 12 years.<sup>256</sup>

The Phase 1 standards for this vocational vehicle category generally apply at the chassis manufacturer level. For the same reasons given in Phase 1, the agencies propose to apply the Phase 2 vocational vehicle standards at the chassis manufacturer level.<sup>257</sup>

The Phase 1 regulations prohibit the introduction into commerce of any heavy-duty vehicle without a valid certificate or exemption. 40 CFR 1037.620, redesignated as 40 CFR 1037.622 in the proposed rule, allows for a temporary exemption for the chassis manufacturer if it produces the chassis for a secondary manufacturer that holds a certificate. Further discussion of temporary exemptions and possible obligations of secondary manufacturers can be found in Section V. E.

In Phase 1, the agencies adopted two equivalent sets of standards for Class 2b-8 vocational vehicles. For vehicle-level (chassis) emissions, EPA adopted CO<sub>2</sub> standards expressed in grams per ton-mile. For fuel efficiency, NHTSA adopted fuel consumption standards expressed in gallons per 1,000 ton-miles. The Phase 1 engine-based standards vary based on the expected weight class and usage of the vehicle into which the engine will be installed. We adopted Phase 1 vehicle-based standards that vary according to one key attribute, GVWR, based on the same groupings of vehicle weight classes used for the engine standards—light heavy-duty (LHD, Class 2b–5), medium heavy-duty (MHD, Class 6–7), and heavy heavy-duty (HHD, Class 8).

In Phase 1, the agencies defined a special regulatory category called vocational tractor, which generally operate more like vocational vehicles than line haul tractors.<sup>258</sup> As described above in Section III.C.4, under the Phase 1 rules, a vocational tractor is certified under standards for vocational vehicles, not those for tractors. In Phase 2, the agencies propose to retain the vocational tractor definition, and to allow vocational tractors to certify over any of the proposed vocational vehicle duty cycles, following the same decision-tree as other vocational chassis. Vocational tractors would continue to satisfy the proposed engine standard and vocational vehicle GEM-

based standard, rather than the proposed tractor standard.

Manufacturers are required to use GEM to determine compliance with the Phase 1 vocational vehicle standards, where the primary vocational vehicle manufacturer-generated input is the measure of tire rolling resistance. The GEM assumes the use of a typical representative, compliant engine in the simulation, resulting in one overall value for CO<sub>2</sub> emissions and one for fuel consumption. The manufacturers of engines intended for use in vocational vehicles are subject to separate Phase 1 engine-based standards. Manufacturers also may demonstrate compliance with the CO<sub>2</sub> standards in whole or in part using credits reflecting CO<sub>2</sub> reductions resulting from technologies not reflected in the GEM testing regime. See 40 CFR 1037.610.

In Phase 1, EPA and NHTSA also adopted provisions designed to give manufacturers a degree of flexibility in complying with the standards. Most significantly, we adopted an ABT program to allow manufacturers within the same averaging set to comply on average. See 40 CFR part 1037, subpart H. These provisions enabled the agencies to adopt overall standards that are more stringent than we could have considered with a less flexible program.<sup>259</sup>

#### *B. Proposed Phase 2 Standards for Vocational Vehicles*

The agencies have held dozens of meetings with manufacturers, suppliers, non-governmental organizations (NGOs), and other stakeholders to identify and understand the opportunities and challenges involved with regulating vocational vehicles. These meetings have helped us to better understand the performance demands of the customers, the fuel-saving and GHG reducing technologies that are being investigated, as well as some challenges that are being encountered. In addition, we updated our industry characterization to better understand the vocational vehicle manufacturing process, including the component suppliers and body builders.<sup>260</sup> We believe these information exchanges have enabled us to develop this proposal with an appropriate balance of

<sup>259</sup> As noted earlier, NHTSA notes that it has greater flexibility in the HD program to include consideration of credits and other flexibilities in determining appropriate and feasible levels of stringency than it does in the light-duty CAFE program. *Cf.* 49 U.S.C. 32902(h), which applies to light-duty CAFE but not to heavy-duty fuel efficiency under 49 U.S.C. 32902(k).

<sup>260</sup> September 2013, Heavy Duty Vocational Vehicle Industry Characterization, EPA Contract No. EP-C-12-011.

<sup>256</sup> See 2013 ICCT Barriers Report at Note 241, above.

<sup>257</sup> See 76 FR 57120.

<sup>258</sup> See EPA's regulation at 40 CFR 1037.630 and NHTSA's regulation at 49 CFR 523.2.

<sup>255</sup> Specialty Transportation.net, 2012. Truck Body Manufacturing in North America.



reasonably achievable goals and a reasonably small risk of unintended consequences.

*(1) Proposed Subcategories and Test Cycles*

The proposed Phase 2 vocational vehicle standards are based on the performance of a wider array of control technologies than the Phase 1 rules. In particular, the agencies are proposing to recognize detailed characteristics of powertrains and drivelines in the proposed Phase 2 vocational vehicle standards. As described below, driveline improvements present a significant opportunity for reducing fuel consumption and CO<sub>2</sub> emissions from vocational vehicles. However, there is no single package of driveline technologies that would be equally suitable for the majority of vocational vehicles, because there is an extremely broad range of driveline configurations available in the market. This is due in part to the variety of build processes, ranging from a purpose built custom chassis to a commercial chassis that may be intended as a multi-purpose stock vehicle. Further, the wide range of applications and driving patterns of these vehicles leads manufacturers to offer a variety of drivelines, as each performs differently in use. For example, depending on whether the transmission has an overdrive gear, drive axle ratios for Class 7 and 8 tractors can be found in the range of 2.5:1 to 4.1:1. By contrast, across all types of vocational vehicles, drive axle ratios can be as low as 3.1:1 (delivery vehicle) and as high as 9.8:1 (transit bus).<sup>261</sup> Other components of the driveline also have a broader range of product in vocational vehicles than in tractors, including transmission gears, tire sizes, and engine speeds. Each of these design features affects the GHG emission rate and fuel consumption of the vehicle. It therefore is reasonable to define more than one baseline configuration of vocational vehicle, to encompass a range of drivelines and recognize that the agencies cannot use a one-size-fits-all approach. A detailed list of the technologies the agencies project could be adopted to meet the proposed vocational vehicle standards is described in Section V.C, and in the draft RIA Chapter 2. The agencies have determined that these technologies

perform differently depending on the drivelines and driving patterns, further supporting the need to subcategorize this segment.

For these reasons, the agencies are proposing to create additional subcategories of vocational vehicles in Phase 2. By creating additional subcategories we would essentially be setting separate baselines and separate numerical performance standards for different groups of vocational vehicle chassis over different test cycles. This would enable the technologies that perform best at highway speeds and those that perform best in urban driving to each to be fully recognized over appropriate test cycles, while avoiding the unintended consequence of forcing vocational vehicles that are designed to serve in a wide variety of applications to be measured against a single baseline. The attributes we believe could define these chassis groups are described below.

The agencies are proposing to split groups of chassis into subcategories based generally on vehicle use patterns in which the CO<sub>2</sub> emissions and fuel consumption standards vary as a consequence. Compliance with these standards would be demonstrated through test cycles reflecting these use patterns, to best assure that actual in-use benefits occur. An ideal test cycle is one in which the performance improvements achieved by the adopted technologies are recognized over the cycle. As described in Section V.C and in the draft RIA Chapter 2.9, the agencies have found that most of the technologies considered do perform differently under different driving conditions. For example, the effectiveness of lower tire rolling resistance is different depending on the degree of highway or transient driving, but the differences are very small compared to the difference in effectiveness for a hybrid drivetrain under different driving conditions. The agencies have found that the measurable changes in performance of a majority of the technologies are significant enough to merit creation of different subcategories with different test cycles.

Idle reduction technology is one type of technology that is particularly duty-cycle dependent. The composite test cycle for vocational vehicles in Phase 1 includes a 42 percent weighting on the

ARB Transient test cycle, which comprises nearly 17 percent of idle time. However, no single idle event in this test cycle is longer than 36 seconds, which may not be enough time to adequately recognize the benefits of some idle reduction technologies.<sup>262</sup> For Phase 2, the agencies propose to recognize this important fuel saving technology by evaluating workday idle reduction technologies through a new idle-only cycle as described in the draft RIA Chapter 3.

The agencies are proposing three different composite test cycles for vocational vehicles in Phase 2: Regional, Multi-Purpose, and Urban. The agencies believe these three cycles balance the competing pressures to recognize the varying performance of technologies, serve the varying needs of customers, and maintain reasonable regulatory simplicity. Table V-1 below presents the nine proposed subcategories of vocational vehicles: Three weight class groupings, each with three composite duty cycles. Each of these proposed composite duty cycles has a different weighting of the new idle cycle, the highway cruise cycles, and the ARB Transient cycle, as shown in Table V-2. The CALSTART HD Truck Fuel Economy Task Group met in June 2013 to discuss vocational vehicle segmentation, and suggested an approach very similar to this. The task group generally supported a limited number of duty cycles that would be sufficient to cover the basic applications while allowing new technology to demonstrate its worth. They recognized that a few meaningful duty cycles could “bound” how vocational vehicles are generally used, while recognizing that this approach would not perfectly match how every vocational vehicle is actually used. Their recommendations included three vocational vehicle duty-cycle-based subcategories: Urban, Regional, and Work Site. A detailed discussion of the CALSTART recommendations, as well as reasoning why the agencies selected the proposed composite cycle weightings can be found in the draft RIA Chapter 2. Continuing the averaging scheme from Phase 1, each manufacturer would be able to average within each vehicle weight class.

<sup>261</sup> See Dana Spicer Drive Axle Application Guidelines, available at [http://www.dana.com/wps/wcm/connect/133007004bd8422b9ea8be14e7b6dae0/DEXT-daag2012\\_0712\\_DriveAxlesAppGuide\\_LR.pdf?MOD=AJPERES&CONVERT\\_TO=url&CACHEID=133007004bd8422b9ea8be14e7b6dae0](http://www.dana.com/wps/wcm/connect/133007004bd8422b9ea8be14e7b6dae0/DEXT-daag2012_0712_DriveAxlesAppGuide_LR.pdf?MOD=AJPERES&CONVERT_TO=url&CACHEID=133007004bd8422b9ea8be14e7b6dae0). See also ZF Driveline and Chassis Technology brochure, available at [http://www.zf.com/media/media/en/document/corporate\\_2/downloads\\_1/flyer\\_and\\_brochures/bus\\_driveline\\_technology\\_flyer/Busbrochure\\_12\\_DE\\_final.pdf](http://www.zf.com/media/media/en/document/corporate_2/downloads_1/flyer_and_brochures/bus_driveline_technology_flyer/Busbrochure_12_DE_final.pdf)

<sup>262</sup> However, as noted above, emission improvements due to workday idle technology can be recognized under Phase 1 as an innovative credit under 40 CFR 1037.610 and 49 CFR 535.7.



TABLE V-1—PROPOSED REGULATORY SUBCATEGORIES FOR VOCATIONAL VEHICLES

Weight class	Light heavy-duty class 2b-5	Medium heavy-duty class 6-7	Heavy heavy-duty class 8
Duty Cycle .....	Regional ..... Multi-Purpose ..... Urban .....	Regional ..... Multi-Purpose ..... Urban .....	Regional. Multi-Purpose. Urban.

TABLE V-2—PROPOSED COMPOSITE TEST CYCLE WEIGHTINGS (IN PERCENT) FOR VOCATIONAL VEHICLES

	ARB transient	55 mph cruise with road grade <sup>a</sup>	65 mph cruise with road grade <sup>a</sup>	Idle
Regional .....	50	28	22	10
Multi-Purpose .....	82	15	3	15
Urban .....	94	6	0	20

**Note:**

<sup>a</sup> As described in Section III.E.2.b, the agencies are proposing to add road grade to the highway cruise test cycles.

The agencies are proposing criteria for determining the applicability of these subcategories. This is not as straightforward an exercise as with tractors, where attributes such as cab type are obvious physical properties that indicate reasonably well how a vehicle is intended to be used. The agencies have identified the final drive ratio of a vocational vehicle as a possible attribute that may indicate how the vehicle is intended to be used. As described in Section V.E.(1)(d), we expect that most vocational chassis could be assigned to a duty cycle by estimating the percent of maximum engine test speed that is achieved over highway cruise cycles, by use of an equation that relates engine speed to vehicle speed. To simplify this assignment process, the agencies propose that a vocational chassis would be presumed to certify using the Multi-Purpose duty cycle unless some criteria were met that indicated either the Regional or Urban cycle would be more appropriate. Those criteria could include the objective calculation described in Section V.E., or a mix of physical attributes and knowledge of intended use. The agencies are also proposing that chassis manufacturers would be able to request a different duty cycle.

We understand that even within certain vocational vehicle types, vehicle use varies significantly. By employing the agencies' recommended assignment process, it is our expectation that a delivery truck and a dump truck could both be certified over the same duty cycle while still yielding accurate technology effectiveness, if they had similar chassis and driveline characteristics. Further, while intended service class may help a manufacturer decide how to classify some vehicles,

we do not believe that intended service class would be a sufficient indicator by itself. An example of this is the refuse service class. A neighborhood collection refuse truck would not need to be assigned to the same subcategory as a roll-off refuse straight/dump truck that makes daily highway trips to a landfill.

The agencies request comment on the method for assigning vocational chassis to regulatory subcategories. We believe the proposed approach is aligned with the objective to allow manufacturers to certify their chassis over appropriate duty cycles, while maintaining the ability of the market to offer a variety of products to meet customer demand.

(2) Alternative Approach to Subcategorization

The U.S. Department of Energy and EPA are partnering to support a project aimed at evaluating, refining and/or developing duty cycles for tractors and vocational vehicles to be used in the certification of heavy-duty vehicles to GHG emission standards. This project is underway at the National Renewable Energy Laboratory (NREL) and includes a task to develop alternative subcategorization options for vocational vehicles, along with new drive cycles and/or cycle composite weightings. NREL is continuing to collate available vehicle activity data and vehicle characteristics, and the public is invited to submit information to the docket in support of this work to identify possible alternative GEM test cycles and segmentation options for vocational vehicles. Preliminary work under this project indicates that two or three test cycles may adequately represent most vocational vehicles. Depending on how many distinct vehicle driving patterns can be identified with correlation to vehicle attributes, the agencies may

finalize a vocational subcategorization approach that includes as few as two or as many as five composite GEM duty cycles. It is also possible that some test cycles may not apply to all subcategories. It is further possible that the approach to assignment of vocational chassis to subcategories in the final rules may be based on different attributes than those proposed, including different engine and driveline characteristics and different indicators of vehicle purpose. Preliminary work from NREL indicates that in-use drive cycles may include more idle operation for all types of vocational vehicles than is represented by the currently proposed GEM test cycles. Depending on comments and additional information received during the comment period, it may be within the agencies' discretion to adopt one or more alternative vocational vehicle test cycles, or re-weight the current test cycles, to better represent real world driving and better reflect performance of the technology packages.

(3) Proposed GHG and Fuel Consumption Standards for Vocational Vehicles

EPA is proposing CO<sub>2</sub> standards and NHTSA is proposing fuel consumption standards for manufacturers of chassis for new vocational vehicles. As described in Sections II.C.1 and II.D.1 above, the agencies are proposing test procedures so that engine performance would be evaluated within the GEM simulation tool. These test procedures include corrections for the test fuel, enabling vocational vehicles to be certified with many different types of CI and SI engines. In addition, EPA is proposing to establish HFC leakage standards for air conditioning systems in vocational vehicles, as described

below and in the draft RIA Chapters 2 and 5.

This section describes the standards and implementation dates that the agencies are proposing for the nine subcategories of vocational vehicles. The agencies have performed a technology analysis to determine the level of standards that we believe would be available at reasonable cost, and would be cost-effective, technologically feasible, and appropriate in the lead time provided. More details of this analysis are described in the draft RIA Chapter 2. This analysis considered the following for each of the proposed regulatory subcategories:

- The level of technology that is incorporated in current new vehicles,
- forecasts of manufacturers' product redesign schedules,
- the available data on CO<sub>2</sub> emissions and fuel consumption for these vehicles,
- technologies that would reduce CO<sub>2</sub> emissions and fuel consumption and that are judged to be feasible and appropriate for these vehicles through the 2027 model year,
- the effectiveness and cost of these technologies,
- a projection of the technologically feasible application rates of these technologies, in this time frame, and
- projections of future U.S. sales for different types of vehicles and engines.

The proposal described here and throughout the rulemaking documents is the preferred alternative, referred to as Alternative 3 in Section X and the draft RIA Chapter 11. However, the agencies are seriously considering another alternative for all segments, including vocational vehicles, referred to as Alternative 4. The agencies believe that Alternative 4 has the potential to be the maximum feasible and reasonable alternative. However, based on the

evidence currently before the agencies, EPA and NHTSA have outstanding questions regarding relative risks and benefits of Alternative 4 due to the time frame envisioned by that alternative. Alternative 4 is predicated on the same general market adoption rates of the same technologies as the proposal, but would provide three years less lead time than the proposal. Details of Alternative 4 are presented in Section V.D, Section X, and in the draft RIA Chapter 11.

The agencies seek comment on the feasibility of Alternative 4 for vocational vehicles, including empirical data on its appropriateness, cost-effectiveness, and technological feasibility. It would be helpful if comments addressed these issues separately for each type of technology.

Additional information and feedback could further inform our assumptions and, by extension, our analysis of feasibility. The agencies believe it is possible that it could be within the agencies' discretion to determine in the final rules that Alternative 4 could be maximum feasible and appropriate under CAA section 202(a)(1) and (2). If the agencies receive relevant information supporting the feasibility of Alternative 4, or regarding technology pathways different than those in Alternatives 3 and 4, the agencies may consider establishing final fuel consumption and GHG emission standards at levels that provide more overall reductions than what we are proposing if we deem them to be maximum feasible and reasonable for NHTSA and EPA, respectively.

#### (a) Proposed Fuel Consumption and CO<sub>2</sub> Standards

The agencies are proposing standards that would phase in over a period of

seven years, beginning in the 2021 model year, consistent with the requirement in EISA that NHTSA's standards provide four full model years of regulatory lead time and three full model years of regulatory stability, and provide sufficient time "to permit the development and application of the requisite technology" for purposes of CAA section 202(a)(2). The proposed Phase 2 program would progress in three-year stages with an intermediate set of standards in MY 2024 and would continue to reduce fuel consumption and CO<sub>2</sub> emissions well beyond the full implementation year of MY 2027. The agencies have identified a technology path for each of these levels of improvement, as described below.

Combining engine and vehicle technologies, vocational vehicles powered by CI engines would be projected to achieve improvements of 16 percent in MY 2027 over the MY 2017 baseline, as described below and in the draft RIA Chapter 2. The agencies project up to 13 percent improvement in fuel consumption and CO<sub>2</sub> emissions in MY 2027 from SI-powered vocational vehicles, as shown in Table V-3. The incremental Phase 2 vocational vehicle standards would ensure steady progress toward the MY 2027 standards, with improvements in MY 2021 of up to seven percent and improvements in MY 2024 of up to 11 percent over the MY 2017 baseline vehicles, as shown in Table V-3.

The agencies' analyses, as discussed in this preamble and in the draft RIA Chapter 2, show that the proposed standards would be appropriate under each agency's respective statutory authority.

TABLE V-3—PROJECTED VOCATIONAL VEHICLE CO<sub>2</sub> AND FUEL USE REDUCTIONS (IN PERCENT) FROM 2017 BASELINE

Model year	Engine type	Heavy heavy-duty class 8	Medium heavy-duty class 6-7	Light heavy-duty class 2b-5
2021 .....	CI Engine .....	7	7	6
	SI Engine .....	5	5	4
2024 .....	CI Engine .....	11	11	10
	SI Engine .....	7	7	7
2027 .....	CI Engine .....	16	16	16
	SI Engine .....	12	13	12

Based on our analysis and research, the agencies believe that the improvements in vocational vehicle fuel consumption and CO<sub>2</sub> emissions can be achieved through deployment and utilization of a greater set of technologies than formed the technology basis for the Phase 1

standards. In developing the proposed standards, the agencies have evaluated the current levels of fuel consumption and emissions, the kinds of technologies that could be utilized by manufacturers to reduce fuel consumption and emissions, the associated lead time, the associated costs for the industry, fuel

savings for the owner/operator, and the magnitude of the CO<sub>2</sub> reductions and fuel savings that may be achieved. After examining the possibilities of vehicle improvements, the agencies are basing the proposed standards on the performance of workday idle reduction technologies, improved transmissions

including hybrid powertrains, axle technologies, weight reduction, and further tire rolling resistance improvements. The EPA-only air conditioning standard is based on leakage improvements.

The agencies' evaluation indicates that some of the above vehicle technologies are commercially available today, though often in limited volumes. Other technologies would need additional time for development. Those that we believe are available today and may be adopted to a limited extent in some vehicles include improved tire rolling resistance, weight reduction, some types of conventional transmission improvements, neutral idle, and air conditioning leakage improvements. However, EPA is not proposing standards predicated on performance of these technologies until MY 2021.<sup>263</sup> The agencies consider any potential benefits that could be achieved by implementing rules requiring some technologies on vocational vehicles earlier than MY 2021 to be outweighed by several disadvantages. For one, manufacturers would need lead time to develop compliance tracking tools. Also, if the Phase 2 vocational vehicle standards began in a different year than the tractor standards, this could create unnecessary added complexity, and could strongly detract from the fuel savings and GHG emission reductions that could otherwise be achieved. Therefore we anticipate that the Phase 1 standards will continue to apply in model years 2018 to 2020.

Vehicle technologies that we believe will become available in the near term include improved axle lubrication and 6x2 axles. Vehicle technologies that we understand would benefit from even more development time include stop-start idle reduction and hybrid powertrains. The agencies have analyzed the technological feasibility of achieving the fuel consumption and CO<sub>2</sub> standards, based on projections of what

actions manufacturers would be expected to take to reduce fuel consumption and emissions to achieve the standards, and believe that the standards would be technologically feasible throughout the regulatory useful life of the program. EPA and NHTSA estimated vehicle package costs are found in Section V.C.(2).

Table V-4 and Table V-5 present EPA's proposed CO<sub>2</sub> standards and NHTSA's proposed fuel consumption standards, respectively, for chassis manufacturers of Class 2b through Class 8 vocational vehicles for the beginning model year of the program, MY 2021. As in Phase 1, the standards would be in the form of the mass of emissions, or gallons of fuel, associated with carrying a ton of cargo over a fixed distance. The EPA standards would be measured in units of grams CO<sub>2</sub> per ton-mile and the NHTSA standards would be in gallons of fuel per 1,000 ton-miles. With the mass of freight in the denominator of this term, the program is designed to measure improved efficiency in terms of freight efficiency. As in Phase 1, the Phase 2 program would assign a fixed default payload in GEM for each vehicle weight class group (heavy heavy-duty, medium heavy-duty, and light heavy-duty). Even though this simplification does not allow individual vehicle freight efficiencies to be recognized, the general capacity for larger vehicles to carry more payload is represented in the numerical values of the proposed standards for each weight class group.

EPA's proposed vocational vehicle CO<sub>2</sub> standards and NHTSA's proposed fuel consumption standards for the MY 2024 stage of the program are presented in Table V-6 and Table V-7, respectively. These reflect broader adoption rates of vehicle technologies already considered in the technology basis for the MY 2021 standards. The standards for vehicles powered by CI engines also reflect that in MY 2024, the separate engine standard would be more

stringent, so the vehicle standard keeps pace with the engine standard.

EPA's proposed vocational vehicle CO<sub>2</sub> standards and NHTSA's proposed fuel consumption standards for the full implementation year of MY 2027 are presented in Table V-8 and Table V-9, respectively. These reflect even greater adoption rates of the same vehicle technologies considered in the basis for the previous stages of the Phase 2 standards. The proposed MY 2027 standards for vocational vehicles powered by CI engines reflect additional engine technologies consistent with those on which the separate proposed MY 2027 CI engine standard is based. The proposed MY 2027 standards for vocational vehicles powered by SI engines reflect improvements due to additional engine friction reduction technology, which is not among the technologies on which the separate SI engine standard is based.

The proposed standards are based on highway cruise cycles that include road grade, to better reflect real world driving and to help recognize engine and driveline technologies. See Section III.E. The agencies have evaluated some alternate road grade profiles, including several recommended by NREL and two developed independently by the agencies, and have prepared possible alternative vocational vehicle standards based on these profiles. The agencies request comment on this analysis, which is available in a memorandum to the docket.<sup>264</sup>

As described in Section I, the agencies are proposing to continue the Phase 1 approach to averaging, banking and trading (ABT), allowing ABT within vehicle weight classes. For Phase 2, continuing this approach means allowing averaging between CI-powered vehicles and SI-powered vehicles that belong to the same weight class group and have the same regulatory useful life.

TABLE V-4—PROPOSED EPA CO<sub>2</sub> STANDARDS FOR MY 2021 CLASS 2b-8 VOCATIONAL VEHICLES

Duty cycle	Light heavy-duty class 2b-5	Medium heavy-duty class 6-7	Heavy heavy-duty class 8
<b>EPA Standard for Vehicle with CI Engine Effective MY 2021 (gram CO<sub>2</sub>/ton-mile)</b>			
Urban .....	296	188	198
Multi-Purpose .....	305	190	200
Regional .....	318	186	189
<b>EPA Standard for Vehicle with SI Engine Effective MY 2021 (gram CO<sub>2</sub>/ton-mile)</b>			
Urban .....	320	203	214

<sup>263</sup> NHTSA is unable to adopt mandatory amended standards in those model years since there would be less than the statutorily-prescribed

amount of lead time available. 49 U.S.C. 32902(k)(3)(A).

<sup>264</sup> See Memorandum dated May 2015 on Possible Tractor, Trailer, and Vocational Vehicle Standards Derived from Alternative Road Grade Profiles.

TABLE V-4—PROPOSED EPA CO<sub>2</sub> STANDARDS FOR MY 2021 CLASS 2b-8 VOCATIONAL VEHICLES—Continued

Duty cycle	Light heavy-duty class 2b-5	Medium heavy-duty class 6-7	Heavy heavy-duty class 8
Multi-Purpose .....	329	205	216
Regional .....	343	201	204

TABLE V-5—PROPOSED NHTSA FUEL CONSUMPTION STANDARDS FOR MY 2021 CLASS 2b-8 VOCATIONAL VEHICLES

Duty cycle	Light heavy-duty class 2b-5	Medium heavy-duty class 6-7	Heavy heavy-duty class 8
<b>NHTSA Standard for Vehicle with CI Engine Effective MY 2021 (Fuel Consumption gallon per 1,000 ton-mile)</b>			
Urban .....	29.0766	18.4676	19.4499
Multi-Purpose .....	29.9607	18.6640	19.6464
Regional .....	31.2377	18.2711	18.5658
<b>NHTSA Standard for Vehicle with SI Engine Effective MY 2021 (Fuel Consumption gallon per 1,000 ton-mile)</b>			
Urban .....	36.0077	22.8424	24.0801
Multi-Purpose .....	37.0204	23.0674	24.3052
Regional .....	38.5957	22.6173	22.9549

TABLE V-6—PROPOSED EPA CO<sub>2</sub> STANDARDS FOR MY 2024 CLASS 2b-8 VOCATIONAL VEHICLES

Duty cycle	Light heavy-duty class 2b-5	Medium heavy-duty class 6-7	Heavy heavy-duty class 8
<b>EPA Standard for Vehicle with CI Engine Effective MY 2024 (gram CO<sub>2</sub>/ton-mile)</b>			
Urban .....	284	179	190
Multi-Purpose .....	292	181	192
Regional .....	304	178	182
<b>EPA Standard for Vehicle with SI Engine Effective MY 2024 (gram CO<sub>2</sub>/ton-mile)</b>			
Urban .....	312	197	208
Multi-Purpose .....	321	199	210
Regional .....	334	196	199

TABLE V-7—PROPOSED NHTSA FUEL CONSUMPTION STANDARDS FOR MY 2024 CLASS 2b-8 VOCATIONAL VEHICLES

Duty cycle	Light heavy-duty class 2b-5	Medium heavy-duty class 6-7	Heavy heavy-duty class 8
<b>NHTSA Standard for Vehicle with CI Engine Effective MY 2024 (Fuel Consumption gallon per 1,000 ton-mile)</b>			
Urban .....	27.8978	17.5835	18.6640
Multi-Purpose .....	28.6837	17.7800	18.8605
Regional .....	29.8625	17.4853	17.8782
<b>NHTSA Standard for Vehicle with SI Engine Effective MY 2024 (Fuel Consumption gallon per 1,000 ton-mile)</b>			
Urban .....	35.1075	22.1672	23.4050
Multi-Purpose .....	36.1202	22.3923	23.6300
Regional .....	37.5830	22.0547	22.3923

TABLE V-8—PROPOSED EPA CO<sub>2</sub> STANDARDS FOR MY 2027 CLASS 2b-8 VOCATIONAL VEHICLES

Duty cycle	Light heavy-duty class 2b-5	Medium heavy-duty class 6-7	Heavy heavy-duty class 8
<b>EPA Standard for Vehicle with CI Engine Effective MY 2027 (gram CO<sub>2</sub>/ton-mile)</b>			
Urban .....	272	172	182
Multi-Purpose .....	280	174	183

TABLE V-8—PROPOSED EPA CO<sub>2</sub> STANDARDS FOR MY 2027 CLASS 2b-8 VOCATIONAL VEHICLES—Continued

Duty cycle	Light heavy-duty class 2b-5	Medium heavy-duty class 6-7	Heavy heavy-duty class 8
Regional .....	292	170	174
<b>EPA Standard for Vehicle with SI Engine Effective MY 2027 (gram CO<sub>2</sub>/ton-mile)</b>			
Urban .....	299	189	196
Multi-Purpose .....	308	191	198
Regional .....	321	187	188

TABLE V-9—PROPOSED NHTSA FUEL CONSUMPTION STANDARDS FOR MY 2027 CLASS 2b-8 VOCATIONAL VEHICLES

Duty cycle	Light heavy-duty class 2b-5	Medium heavy-duty class 6-7	Heavy heavy-duty class 8
<b>NHTSA Standard for Vehicle with CI Engine Effective MY 2027 (Fuel Consumption gallon per 1,000 ton-mile)</b>			
Urban .....	26.7191	16.8959	17.8782
Multi-Purpose .....	27.5049	17.0923	17.9764
Regional .....	28.6837	16.6994	17.0923
<b>NHTSA Standard for Vehicle with SI Engine Effective MY 2027 (Fuel Consumption gallon per 1,000 ton-mile)</b>			
Urban .....	33.6446	21.2670	22.0547
Multi-Purpose .....	34.6574	21.4921	22.2797
Regional .....	36.1202	21.0420	21.1545

As with the other regulatory categories of heavy-duty vehicles, NHTSA and EPA are proposing standards that apply to Class 2b-8 vocational vehicles at the time of production, and EPA is proposing standards for a specified period of time in use (e.g., throughout the regulatory useful life of the vehicle). The derivation of the standards for these vehicles, as well as details about the proposed provisions for certification and implementation of these standards, are discussed in more detail later in this notice and in the draft RIA.

#### (b) Proposed HFC Leakage Standards

The Phase 1 GHG standards do not include standards to control direct HFC emissions from air conditioning systems on vocational vehicles. EPA deferred such standards due to “the complexity in the build process and the potential for different entities besides the chassis manufacturer to be involved in the air conditioning system production and installation”. See 76 FR 57194. During our stakeholder outreach conducted for Phase 2, we learned that the majority of vocational vehicles are sold as cab-completes with the dashboard-mounted air conditioning systems installed by the chassis manufacturer. For those vehicles that have A/C systems installed by a second stage manufacturer, EPA is proposing revisions to our regulations that would resolve the issues identified in Phase 1, in what we believe is a

practical and feasible manner, as described below in Section V.E.

For the above reasons, in Phase 2, EPA now believes that it is reasonable to propose A/C refrigerant leakage standards for Class 2b-8 vocational vehicles, beginning with the 2021 model year. Chassis sold as cab-completes typically have air conditioning systems installed by the chassis manufacturer. For these configurations, the process for certifying that low leakage components are used would follow the system in place currently for comparable systems in tractors. In the case where a chassis manufacturer would rely on a second stage manufacturer to install a compliant air conditioning system, the chassis manufacturer must follow the proposed delegated assembly provisions described below in Section V.E.

#### (4) Proposed Exemptions and Exclusions

##### (a) Proposed Standards for Emergency Vehicles

Emergency vehicles are covered by the Phase 1 program at the same level of stringency as any other vocational vehicle. In discussions with representatives of the Fire Apparatus Manufacturers Association, the agencies have learned that chassis manufacturers of fire apparatus are currently able to obtain compliant engines and tires with the coefficient of rolling resistance allowing compliance with the Phase 1

standards. The agencies are proposing in Phase 2 to allow emergency vehicles to meet less stringent standards than other vocational vehicles. There are two reasons for doing so. First, as the level of complexity of Phase 2 would increase with the need for additional technologies aimed to improve driveline efficiency, the compliance burden would be disproportionately high for a company that manufactures small volumes of specialized chassis. The ability of such a company to benefit from averaging would be limited, as would be the ability to spread compliance costs across many vehicles. The second and more important reason is that emergency vehicles, which are necessarily built for high levels of performance and reliability, would likely sacrifice some levels of function to attain the proposed Phase 2 standards. For example, vehicles with large engines, high-torque powertrains, and tires designed with deep tread would likely be deficit-producing vehicles if manufacturers needed to certify an emergency vehicle family to the primary proposed standards.

In the MY 2017–2025 light-duty rule, the agencies adopted an exclusion for emergency and police vehicles from GHG and fuel economy standards.<sup>265</sup> As described in that rule, the unique features of purpose-built emergency vehicles, such as high rolling resistance

<sup>265</sup> See 77 FR 62653, October 12, 2012.

tires, reinforced suspensions, and special calibrations of engines and transmissions, have the effect of raising their GHG emissions. The agencies determined in that rule that an exemption was appropriate because the technological feasibility issues for emergency vehicles went beyond those of other high-performance vehicles, and vehicles with these performance characteristics must continue to be made available in the market. The agencies do not believe that non-emergency vocational vehicles are designed for the severe duty cycles that are experienced by emergency vehicles, and therefore do not face the same potential constraints in terms of vehicle design and the application of technology.

In conducting an independent technological feasibility assessment for heavy-duty emergency vehicles, the agencies believe that some GHG and fuel saving technologies could reasonably be applied without compromising vehicle utility. However, these vehicles are designed, built, and operated so differently than other vocational vehicles that we believe keeping them in the same averaging sets as other vocational vehicles in Phase 2 would not be appropriate and thus a separate standard (evaluated from a baseline specific to these vehicles) is warranted.

Our feasibility analysis and the available tire data indicate that emergency vehicle manufacturers can reasonably continue to apply tires with the Phase 1 level tire CRR performance, in the Phase 2 program. We have also learned that a variety of vehicle-level technologies are being developed specifically for emergency vehicles, to maintain on-board electronics without excessive idling. Modern fire apparatus and ambulances typically have multiple computers and other electronic devices on-board, each of which requires power and continues to draw electricity when the vehicle is parked and the crew is responding to an emergency, which could take several hours. Most on-board batteries and alternators are not capable of sustaining these power demands for any length of time, so emergency vehicles must either operate in a high-idle mode or adopt one of several possible technologies that can assist with electrical load management. Some of these technologies can enable an emergency vehicle to shut down the main engine and drastically reduce idle emissions.<sup>266</sup> NHTSA and EPA have not

based the proposed emergency vehicle standards on use of idle reduction technologies because we do not believe the regular neutral idle and stop-start technologies we project for other vocational vehicles could apply equally to emergency vehicles, and we do not have enough information about this subset of idle reduction technologies that is designed for extended electrical load management to either estimate an effectiveness value or determine an appropriate market adoption rate. The agencies request comment on whether we should include any market adoption rate of idle reduction technologies for emergency vehicles, as part of the basis for the Phase 2 emergency vocational vehicle standard.

To address both the technical feasibility and the compliance burden, the agencies are proposing less stringent standards that also have a simplified compliance method. Because the potential trade-offs between performance and fuel efficiency apply equally to any emergency vehicle manufacturer, the agencies propose that these less stringent standards would apply for commercial chassis manufacturers of emergency vehicles, as well as for custom chassis manufacturers. The standard for vehicles identified at the time of certification as being intended for emergency service would be predicated solely on the continued use of lower rolling resistance tires, at the Phase 2 baseline level (*i.e.* compliant with Phase 1).<sup>267</sup>

With respect to standards for engines used in these emergency vehicles, based on what we have learned from discussions with engine manufacturers, we understand that engines designed for heavy-duty emergency vehicles are generally higher-emitting than other engines. However, if we maintain a separate engine standard and regulatory flexibility such as ABT, fire apparatus manufacturers would be able to obtain engines that, on average, meet the proposed Phase 2 engine standards. The agencies further recognize that the proposed engine map inputs to GEM in the primary program would pose a difficulty for emergency vehicle manufacturers. If we required engine-specific inputs then these manufacturers would have to apply extra vehicle technologies to compensate for the necessary but higher-emitting engine. The agencies are therefore not proposing to recognize engine performance as part

of the vehicle standard for emergency vehicles. Manufacturers of these vehicles would be expected to install an engine that is certified to the applicable separate Phase 2 engine standard. However, under the simplified compliance method we are proposing, emergency vehicle manufacturers would not follow the otherwise applicable Phase 2 proposed approach of entering an engine map in GEM. Instead a Phase 1 style GEM interface would be made available, where an EPA default engine specified by rule would be simulated in GEM. The agencies request comments on the merits of using an equation-based compliance approach for emergency vehicle manufacturers, similar to the approach proposed for trailer manufacturers and described in Section IV.F.

This approach is consistent with the approach recommended by the Small Business Advocacy Review Panel, which believed it would be feasible for small emergency vehicle manufacturers to install a Phase 2-compliant engine, but recommended a simplified certification approach to reduce the number of required GEM inputs. Consistent with the recommendations of this panel, the agencies are asking for comments on whether there would be enough fuel consumption and CO<sub>2</sub> emissions benefits achieved by use of LRR tires in emergency vehicles to justify requiring small business emergency chassis manufacturers to adopt them.

We expect some commercial chassis manufacturers that serve the emergency vehicle market may have the ability to meet the proposed Phase 2 standards of our primary program when including emergency vehicles in their averaging sets. Even so, we are proposing that they have the option to comply with the less stringent standards, because there are fewer opportunities to improve fuel efficiency on emergency vehicles, which (as noted) are designed for high levels of performance and severe duty. The agencies expect that this compliance path would be most needed by custom chassis manufacturers who serve the emergency vehicle market. Custom chassis manufacturers typically offer a narrow range of products with low sales volumes. Therefore, fleet averaging would provide a lower level of compliance flexibility, and there would be less opportunity to spread the costs of developing advanced technologies across a large number of vehicles. Further, many custom chassis manufacturers do not qualify as small entities under the SBA regulations. Thus, the agencies believe that existence of program-wide ABT does not vitiate

<sup>266</sup> See "How to solar power a fire truck or ambulance," available at [http://www.firerescue1.com/fire-products/apparatus-](http://www.firerescue1.com/fire-products/apparatus-accessories/articles/1934440-How-to-solar-power-a-fire-truck-or-ambulance/)

[accessories/articles/1934440-How-to-solar-power-a-fire-truck-or-ambulance/](http://www.firerescue1.com/fire-products/apparatus-accessories/articles/1934440-How-to-solar-power-a-fire-truck-or-ambulance/), accessed November 2014.

<sup>267</sup> See 40 CFR 86.1803-01 for the applicable definition of emergency vehicle.

the need to propose alternative, less stringent standards for emergency vehicles.

Table V–10 below presents the proposed numerical standards to which an emergency vehicle chassis would be certified under this provision.

Emergency vehicles certified to these

proposed emergency vehicle standards would be ineligible to generate credits. The proposed standards shown below were derived by building a model of three baseline vehicles (LHD, MHD, HHD) using attributes similar to those developed for the primary program as

assigned to the Urban drive cycle subcategories. By modeling a 2021-compliant engine and tires with CRR of 7.7, the MY 2021 standards were derived using GEM. Details of these configurations are provided in the draft RIA Chapter 2.

TABLE V–10—PROPOSED STANDARDS FOR CLASS 2b–8 EMERGENCY VEHICLES FOR MY 2021 AND LATER

Implementation year	Light heavy-duty class 2b–5	Medium heavy-duty class 6–7	Heavy heavy-duty class 8
<b>Proposed EPA Emergency Vehicle Standard (gram CO<sub>2</sub>/ton-mile)</b>			
MY2021 .....	312	195	215
<b>Proposed NHTSA Emergency Vehicle Standard (Fuel Consumption gallon per 1,000 ton-mile)</b>			
MY2021 .....	30.6483	19.1552	21.1198

The agencies have estimated the costs of vocational vehicle technology packages, as presented below in Table V–20 to Table V–22. The technologies on which the proposed emergency vehicle standards are based include engines, LRR tires, and leak-tight air conditioning systems. Using the estimated costs of those technologies as presented, the agencies estimate that the average cost for a heavy heavy-duty or medium-heavy-duty emergency vehicle to meet the proposed emergency vehicle standards would be approximately \$463 in MY 2027, and the average cost for a light heavy-duty emergency vehicle would be approximately \$497 in MY 2027. To derive these estimates, the agencies have combined the \$7 cost of LRR tires that is presented in Table V–20 with the engine and air conditioning costs presented in Table V–22. The agencies are not aware of any emergency vehicle manufacturer that produces engines, thus most of these costs would be borne by engine manufacturers. While some of the added engine costs may be passed on to emergency vehicle manufacturers and vehicle owners/operators, the overall costs of these technologies are on the order of the Phase 1 vocational vehicle program costs, which are highly cost-effective.

To ensure that only emergency vehicle chassis would be able to certify to these less stringent standards, the agencies propose that manufacturers identify vehicles using the definition at 40 CFR 86.1803–01, which for Phase 2 purposes would be an ambulance or a fire truck. Manufacturers have informed us that it is feasible to identify such vehicles using sales codes or the presence of specialty attributes. The agencies request comment on the merits

and drawbacks of aligning the definition of emergency vehicle for purposes of the Phase 2 program with the definition of emergency vehicle for purposes of the light-duty GHG provisions under 40 CFR 86.1818, which includes additional vehicles such as those used by law enforcement.

According to the International Council on Clean Transportation (ICCT), less than one percent of all new heavy-duty truck registrations from 2003 to 2007 were emergency vehicles.<sup>268</sup> On average, the ICCT's data suggest that approximately 5,700 new emergency vehicles are sold in the U.S. each year; about 0.8 percent of the 3.4 million new heavy-duty trucks registered between 2003 and 2007. According to the Fire Apparatus Manufacturers Association, the annual VMT of the newest emergency vehicles ranges from approximately 2,000 to 8,000 miles, as documented in their 2004 Fire Apparatus Duty Cycle White Paper.<sup>269</sup> Because there are relatively few of these vehicles and they travel a relatively small number of miles, the agencies believe that setting less stringent GHG and fuel consumptions standards for these vehicles would not detract from the greater benefits of this rulemaking, and such separate standards are warranted in any case.

<sup>268</sup> ICCT, May 2009, "Heavy-Duty Vehicle Market Analysis: Vehicle Characteristics & Fuel Use, Manufacturer Market Shares."

<sup>269</sup> Fire Apparatus Manufacturer's Association, Fire Apparatus Duty Cycle White Paper, August 2004, available at <http://www.deepriverct.us/firehousestudy/reports/Apparatus-Duty-Cycle.pdf>.

#### (b) Possible Standards for Other Custom Chassis Manufacturers

The agencies request comment on extending the above simplified compliance procedure and less stringent Phase 2 standards to other custom chassis manufacturers—those who offer such a narrow range of products that averaging is not of practical value as a compliance flexibility, and for whom there are not large sales volumes over which to distribute technology development costs. Custom chassis manufacturers that are not small businesses must comply with the Phase 1 standards and are generally doing so, by installing tires with the required coefficient of rolling resistance. We are aware of a handful of U.S. chassis manufacturers serving the recreational vehicle and bus markets who we believe would have a disproportionate compliance burden, should we require compliance with the primary proposed Phase 2 standards.

According to the MOVES model forecast, there will be approximately 1,000 commercial intercity coach buses, 5,000 transit buses, 40,000 school buses, and 90,000 recreational vehicles manufactured new for MY 2018.<sup>270</sup> In each of these markets, specialty chassis manufacturers compete with large vertically integrated manufacturers. We request comment on the merits of offering less stringent standards to small volume chassis manufacturers, and seek comment as well as to other factors the agencies should consider to ensure this

<sup>270</sup> Vehicle populations are estimated using MOVES2014. More information on projecting populations in MOVES is available in the following report: USEPA (2015). "Population and Activity of On-road Vehicles in MOVES2014—Draft Report" Docket No. EPA-HQ-OAR–2014–0827.

approach would not have unintended consequences for businesses competing in the vocational vehicle market.

If the agencies were to adopt less stringent standards for custom non-emergency chassis manufacturers, we would expect to limit this by setting a maximum number of eligible vocational chassis annually for each such manufacturer. The agencies request comment on an appropriate sales volume to qualify for these possible standards, and also request comment as to whether the sales volume thresholds should be different for different markets. We further request comment on whether it would adversely affect business competitiveness if custom chassis manufacturers were held to a different standard than commercial chassis manufacturers, and whether the agencies should consider allowing commercial chassis manufacturers competing in these markets to sell a limited number of chassis certified to a less stringent standard.

As an alternative approach, the agencies request comment on providing custom chassis manufacturers with additional lead time to comply. For example, we could allow such manufacturers an additional one or two years to meet each level of the primary proposed vocational vehicle standards.

If the agencies pursued the approach of less stringent standards, we would likely adopt a simplified compliance procedure similar to the one proposed for emergency vehicles. Custom chassis manufacturers would not follow the otherwise applicable Phase 2 proposed approach of entering an engine map in GEM. Instead, a Phase 1 style GEM interface would be made available, where an EPA default engine specified by rule would be simulated in GEM. The vehicle-level standard would be predicated on a simpler set of technologies than the primary proposed Phase 2 standard, most likely lower rolling resistance tires and idle reduction. Because these would not be emergency vehicles, we believe the performance of these vehicles would not be compromised by requiring improvement in tire CRR beyond that of the Phase 1 level. The agencies request comment on whether we should develop separate standards for different vehicle types such as recreational vehicles and buses.

The Small Business Advocacy Review Panel recommended that EPA seek comment on how to design a small business vocational vehicle exemption by means of a custom chassis volume exemption and what sales volume would be an appropriate threshold. The agencies seek comments on all aspects

of an approach for custom vocational vehicle chassis manufacturers that would enable us to adopt a final Phase 2 program that would be consistent with the recommendations of the panel.

#### (c) Off-Road and Low-Speed Vocational Vehicle Exemptions

The agencies are proposing to continue the exemptions in Phase 1 for off-road and low-speed vocational vehicles, with revision. See generally 76 FR 57175. These provisions currently apply for vehicles that are defined as “motor vehicles” per 40 CFR 85.1703, but may conduct most of their operations off-road, such as drill rigs, mobile cranes and yard hostlers. Vehicles qualifying under these provisions must be built with engines certified to meet the applicable engine standard, but need not comply with a vehicle-level GHG or fuel consumption standard. In Phase 1, this typically means not needing to install tires with a lower coefficient of rolling resistance. Because manufacturers choosing to exempt vehicles (but not engines) based on the criteria for heavy-duty off road vehicles at 40 CFR 1037.631 and 49 CFR 523.2 will for the first time provide a description to the agencies of how they meet the qualifications for this exemption in their end-of-the year reports in the spring of 2015, we do not have information beyond what we knew at the time of the Phase 1 rules regarding how broadly this provision is being used. Nonetheless, we are proposing to discontinue the criterion for exemption based solely on use of tires with maximum speed rating at or below 55 mph. The agencies are concerned that tires are so easily replaced that this would be an unreliable way to identify vehicles that truly need special consideration. We are proposing to retain the qualifying criteria related to design and use of the vehicle. We invite comments on the proposed revisions to the qualifying criteria in the regulations, including whether the rated speed of the tires should be retained, and whether vehicles intended to be covered by this provision have characteristics that are captured by the proposed criteria.

#### C. Feasibility of the Proposed Vocational Vehicle Standards

This section describes the agencies’ technological feasibility and cost analysis in greater detail. Further detail on all of these technologies can be found in the draft RIA Chapter 2.4 and Chapter 2.9. The variation in the design and use of vocational vehicles has led the agencies to project different technology solutions for each regulatory

subcategory. Manufacturers may also find additional means to reduce emissions and lower fuel consumption than the technologies identified by the agencies, and of course may adopt any compliance path they deem most advantageous. The focus of this section is on the feasibility of the proposed standards for non-emergency vocational vehicles. Further, the agencies project that these technology packages would also be feasible for vocational tractors. With typical driving patterns having limited operation at highway speeds, vocational tractors would appropriately be classified as vocational vehicles, with proposed standards that would not be predicated on the performance of aerodynamic devices. The agencies propose to allow vocational tractors to follow the same subcategory assignment process as other vocational vehicles. For example, a beverage tractor intended for local delivery routes may have a driving pattern that is reasonably represented by the proposed Urban test cycle. The agencies request comment on whether vocational tractors would be deficit-generating vehicles if certified as vocational vehicles, where performance would be measured against the proposed vocational vehicle baseline configurations. For example, if a tractor were designed with a higher power engine to carry a heavier payload than presumed in the GEM baseline for that subcategory, would GEM return a value that poorly represents the real world performance of that vehicle, and if so, would that merit a different certification approach for vocational tractors?

NHTSA and EPA collected information on the cost and effectiveness of fuel consumption and CO<sub>2</sub> emission reducing technologies from several sources. The primary sources of information were the Southwest Research Institute evaluation of heavy-duty vehicle fuel efficiency and costs for NHTSA,<sup>271</sup> the 2010 National Academy of Sciences report of Technologies and Approaches to Reducing the Fuel Consumption of Medium- and Heavy-Duty Vehicles,<sup>272</sup> TIAX’s assessment of technologies to support the NAS panel report,<sup>273</sup> the technology cost analysis conducted by

<sup>271</sup> Reinhart, T. 2015. *Commercial Medium- and Heavy-Duty (MD/HD) Truck Fuel Efficiency Technology Study*—Reports #1 and #2. Washington, DC: National Highway Traffic Safety Administration; and Schubert, R., Chan, M., Law, K. 2015. *Commercial Medium- and Heavy-Duty (MD/HD) Truck Fuel Efficiency Cost Study*. Washington, DC: National Highway Traffic Safety Administration.

<sup>272</sup> See NAS Report, Note 136, above.

<sup>273</sup> See TIAX 2009, Note 137, above.



ICF for EPA,<sup>274</sup> and the 2009 report from Argonne National Laboratory on Evaluation of Fuel Consumption Potential of Medium and Heavy Duty Vehicles through Modeling and Simulation.<sup>275</sup>

(1) What technologies are the agencies considering to reduce the CO<sub>2</sub> emissions and fuel consumption of vocational vehicles?

In assessing the feasibility of the proposed Phase 2 vocational vehicle standards, the agencies evaluated a suite of technologies, including workday idle reduction, improved tire rolling resistance, improved transmissions, improved axles, and weight reduction, as well as their impact on reducing fuel consumption and GHG emissions. The agencies also evaluated aerodynamic technologies and full electric vehicles.

As discussed above, vocational vehicles may be powered by either SI or CI engines. The technologies and feasibility of the proposed engine standards are discussed in Section II. At the vehicle level, the agencies have considered the same suite of technologies and have applied the same reasoning for including or rejecting these vehicle-level technologies as part of the basis for the proposed standards, regardless of whether the vehicle is powered by a CI or SI engine. With the exception of the MY 2027 proposed standards, the analysis below does not distinguish between vehicles with different types of engines. The resulting proposed vehicle standards do reflect the differences arising from the performance of different types of engines over the GEM cycles.

#### (a) Vehicle Technologies Considered in Standard-Setting

The agencies note that the effectiveness values estimated for the technologies may represent average values, and do not reflect the potentially-limitless combination of possible values that could result from adding the technology to different vehicles. For example, while the agencies have estimated an effectiveness of 0.5 percent for low friction axle lubricants, each vehicle could have a unique effectiveness estimate depending on the baseline axle's oil viscosity rating. For purposes of this proposed rulemaking, NHTSA and EPA believe that employing average values for technology effectiveness estimates is an appropriate way of recognizing the

potential variation in the specific benefits that individual manufacturers (and individual vehicles) might obtain from adding a given technology. There may be real world effectiveness that exceeds or falls short of the average, but on-balance the agencies believe this is the most practicable approach for determining the wide ranging effectiveness of technologies in the diverse vocational vehicle arena.

#### (i) Transmissions

Transmission improvements present a significant opportunity for reducing fuel consumption and CO<sub>2</sub> emissions from vocational vehicles. Transmission efficiency is important for many vocational vehicles as their duty cycles involve high percentages of driving under transient operation. The three categories of transmission improvements the agencies considered for Phase 2 are driveline optimization, architectural improvements, and hybrid powertrain systems.

The agencies believe an effective way to derive efficiency improvements from a transmission is by optimizing it with the engine and other driveline components to balance both performance needs and fuel savings. However, many vocational vehicles today are not operating with such optimized systems. Because customers are able to specify their preferred components in a highly customized build process, many vocational vehicles are assembled with components that were designed more for compatibility than for optimization. To some extent, vertically integrated manufacturers are able to optimize their drivelines. However, this is not widespread in the vocational vehicle sector, resulting primarily, from the multi-stage manufacture process. The agencies project transmission and driveline optimization will yield a substantial proportion of vocational vehicle fuel efficiency and GHG emissions reduction improvements for Phase 2. On average, we anticipate that efficiency improvements of about five percent can be achieved from optimization, or deep integration of drivelines. However, we are not assigning a fixed level of improvement; rather we have developed a test procedure, the powertrain test, for manufacturers to use to obtain improvement factors representative of their systems. See Section V.E and the draft RIA Chapter 3 for a discussion of this proposed test procedure. Depending on the test cycle and level of integration, the agencies believe improvement factors greater than ten percent above the baseline vehicle performance could be achieved. To obtain such benefits

across more of the vocational vehicle fleet, the agencies believe there is opportunity for manufacturers to form strategic partnerships and to explore commercial pathways to deeper driveline integration. For example, one partnership of an engine manufacturer and a transmission manufacturer has led to development of driveline components that deliver improved fuel efficiency based on optimization that could not be realized without sharing of critical data.<sup>276</sup>

The agencies project other related transmission technologies would be recognized over the powertrain test along with driveline optimization. These include improved mechanical gear efficiency, more sophisticated shift strategies, more aggressive torque converter lockups, transmission friction reduction, and reduced parasitic losses, as described in the 2009 TIAx report at 4.5.2. Each of these attributes would be simulated in GEM using default values, unless the powertrain test were utilized by the certifying manufacturer. The draft RIA Chapter 4 explains each parameter that would be set as a fixed value in GEM. The expected benefits of improved gear efficiency, shift logic, and torque converter lockup are included in the total projected effectiveness of optimized conventional transmissions using the powertrain test.

Transmission efficiency could also be improved in the time frame of the proposed rules by changes in the architecture of conventional transmissions. Most vocational vehicles currently use torque converter automatic transmissions (AT), especially in Classes 2b-6. According to the 2009 TIAx report, approximately 70 percent of Class 3–6 box and bucket trucks use AT, and all refuse trucks, urban buses, and motor coaches use AT.<sup>277</sup> Automatic transmissions offer acceleration benefits over drive cycles with frequent stops, which can enhance productivity. However, with the diversity of vocational vehicles and drive cycles, other kinds of transmission architectures can meet customer needs, including automated manual transmissions (AMT) and even some manual transmissions (MT).<sup>278</sup>

One type of architectural improvement the agencies project will be developed by manufacturers of all transmission architectures is increased number of gears. The benefit of adding

<sup>276</sup> See Cummins-Eaton partnership at <http://smartadvantagepowertrain.com/>

<sup>277</sup> See TIAx 2009, Note 137, above.

<sup>278</sup> See <http://www.truckinginfo.com/channel/equipment/article/story/2014/10/2015-medium-duty-trucks-the-vehicles-and-trends-to-look-for/page/3.aspx> (downloaded November 2014).

<sup>274</sup> See ICF 2010, Note 139, above.

<sup>275</sup> Argonne National Laboratory, "Evaluation of Fuel Consumption Potential of Medium and Heavy Duty Vehicles through Modeling and Simulation." October 2009

more gears varies depending on whether the gears are added in the range where most operation occurs. The TIAX 2009 report projected that 8-speed transmissions could incrementally reduce fuel consumption by 2 to 3 percent over a 6-speed automatic transmission, for Class 3–6 box and bucket trucks, refuse haulers, and transit buses.<sup>279</sup> Although the agencies estimate the improvement could on average be about two percent for the adding of two gears in the range where significant vehicle operation occurs, we are not assigning a fixed improvement based solely on number of transmission gears. Manufacturers would enter the number of gears and gear ratios into GEM and the model would simulate the efficiency benefit over the applicable test cycle. Because a public version of proposed GEM is being released with these proposed rules, stakeholders are free to use this tool to explore the effectiveness of different numbers of gears and gear ratios over the proposed test cycles. The agencies request comment on all aspects of the GEM tool, including how it models transmissions and shifting strategies. More details on GEM are available in the draft RIA Chapter 4.

Other architectural changes that the agencies project will offer efficiency improvements include improved automated manual transmissions (AMT) and introduction of dual clutch transmissions (DCT). Newer versions of AMT are showing significant improvements in reliability, such that the current generation of transmissions with this architecture is more likely to retain resale value and win customer acceptance than early models.<sup>280</sup> The agencies believe AMT generally compare favorably to manual transmissions in fuel efficiency, and while the degree of improvement is highly driver-dependent, it can be two percent or greater, depending on the drive cycle. See Section III for additional discussion of AMT. The agencies are not assigning fixed average performance levels to compare an AMT with a traditional automatic transmission. Although the lack of a torque converter offers AMT an efficiency advantage in one respect, the lag in power during shifts is a disadvantage. For Phase 2, the agencies

have developed validated models of both AMT and AT, as described in the draft RIA Chapter 4. Manufacturers installing AMT or AT would enter the relevant inputs to GEM and the simulation would calculate the performance. Dual clutch transmissions (DCT) designed for medium heavy-duty vocational vehicles are already in production, and could reasonably be expected to be adapted for other weight classes of vocational vehicles during the time frame of Phase 2.<sup>281</sup> Based on supplier conversations, manufacturers intend to match varying DCT designs with the diverse needs of the heavy-duty market. The agencies do not yet have a validated DCT model in GEM, and we are not assigning a fixed performance level for DCT, though we expect the per-vehicle fuel efficiency improvement due to switching from automatic to DCT to be in the range of three percent over the GEM vocational vehicle test cycles. Selection of transmission architecture type (Manual, AMT, AT, DCT) would be made by manufacturers at the time of certification, and GEM would either use this input information to simulate that transmission using algorithms as described in the draft RIA Chapter 4, or fixed improvements may be assigned. The agencies are assigning fixed levels of improvement that vary by test cycle in GEM for AMT when replacing a manual, which for vocational vehicles would be in the HHD Regional subcategory. If a manufacturer elected not to conduct powertrain testing to obtain specific improvements for use of a DCT, GEM would simulate a DCT as if it were an AMT, with no fixed assigned benefit. The draft RIA at Chapter 2.9 describes the projected effectiveness of each type of transmission improvement for each vocational vehicle test cycle.

Hybrid powertrain systems are included under transmission technologies because, depending on the design and degree of hybridization, they may either replace a conventional transmission or be deeply integrated with a conventional transmission. Further, these systems are often manufactured by companies that also manufacture conventional transmissions.

The agencies are including hybrid powertrains as a technology on which some of the proposed vocational vehicle standards are predicated. We project a variety of mild and strong hybrid

systems, with a wide range of effectiveness. Mild hybrid systems that offer an engine stop-start feature are discussed below under workday idle reduction. For hybrid powertrains, we are estimating a 22 to 25 percent fuel efficiency improvement over the powertrain test, depending on the duty cycle in GEM for the applicable subcategory. The agencies obtained these estimates by projecting a 27 percent effectiveness over the ARB Transient cycle, and zero percent over the constant-speed highway cruise cycles. With the proposed cycle weightings, this calculates to a 25 percent improvement over the Urban cycle, and 22 percent over the Multi-Purpose cycle. According to the NREL Final Evaluation of UPS Diesel Hybrid-Electric Delivery Vans, the improvement of a hybrid over a conventional diesel in gallons per ton-mile on a chassis dynamometer over the NYC Composite test cycle was 28 percent.<sup>282</sup> NREL characterizes the NYC Composite cycle as more aggressive than most of the observed field data points from the study, and may represent an ideal hybrid cycle in terms of low average speed, high stops per mile, and high kinetic intensity. NREL noted that most of the observed field data points were reasonably represented by the HTUF4 cycle, over which the chassis dynamometer results showed a 31 percent improvement in gallons per ton-mile. In units of grams CO<sub>2</sub> per mile, NREL reported these test results as 22 percent improvement over the NYC Composite cycle and 26 percent improvement over the HTUF4 cycle. Based on these results, and the fact that any improvement from strong hybrids in Phase 2 would not be simulated in GEM, but rather would be evaluated using the powertrain test, the agencies deemed it reasonable to estimate a conservative 27 percent effectiveness over the ARB Transient in setting the stringency of the proposed standards.

The Phase 1 standards were not predicated on any adoption of hybrid powertrains in the vocational vehicle sector. Because the first implementation year of Phase 1 came just three years after promulgation, there was insufficient lead time for development and deployment of the technology.<sup>283</sup> In addition, our proposed Phase 2

<sup>279</sup> See TIAX 2009, Note 137, Table 4–48.

<sup>280</sup> See NACFE Confidence Report: Electronically Controlled Transmissions, at <http://www.truckingefficiency.org/powertrain/automated-manual-transmissions> (January 2015). See also <http://www.overdriveonline.com/auto-vs-manual-transmission-autos-finding-solid-ground-by-sharing-data-with-engines/> (accessed November 2014).

<sup>281</sup> See Eaton Announcement September 2014, available at <http://www.ttnews.com/articles/Intbase.aspx?storyid=2969&t=Eaton-Unveils-Medium-Duty-Procision-Transmission>.

<sup>282</sup> Lammert, M., Walkowivz, K., NREL, Eighteen-Month Final Evaluation of UPS Second Generation Diesel Hybrid-Electric Delivery Vans, September 2012, NREL/TP–5400–55658.

<sup>283</sup> In addition to concerns over adequacy of lead time, the agencies described concerns over “modest” emission reductions. See 76 FR 57234. Even so, in Phase 1 the agencies adopted provisions for hybrids to generate advanced technology credits.

vocational vehicle GEM test cycles are expected to better recognize hybrid technology effectiveness than the Phase 1 hybrid test cycle, especially in the Urban subcategory. Further, our Phase 2 cost analysis shows that hybrid systems designed for LHD and MHD vocational vehicles would cost less than the costs we were projecting in Phase 1. The agencies believe the Phase 2 rulemaking timeframes would offer sufficient lead time to develop, demonstrate, and conduct reliability testing for technologies that are still maturing, including these hybrid technologies.

Several types of vocational vehicles are well suited for hybrid powertrains, and are among the early adopters of this technology. Vehicles such as utility or bucket trucks, delivery vehicles, refuse haulers, and buses have operational usage patterns with either a significant amount of stop-and-go activity or spend a large portion of their operating hours idling the main engine to operate a PTO unit.

The industry is currently developing many variations of hybrid powertrain systems. There are a few hybrid systems in the market today and several more under development. In addition, energy storage systems are improving.<sup>284</sup> Heavy-duty customers are getting used to these systems with the number of demonstration products on the road. Even so, some manufacturers may be uncertain how much investment to make in this technology without clear signals about future market demand. A list of hybrid manufacturers and their products intended for the vocational market is provided in the draft RIA Chapter 2.9.

Some low cost products on the simple end of the hybrid spectrum are available that minimize battery demand through the use of ultracapacitors or only provide power assist at low speeds. Our regulations define a hybrid system as one that has the capacity for energy storage.<sup>285</sup> In the light-duty GHG program a mild hybrid is defined as including an integrated starter generator, a high-voltage battery (above 12v), and a capacity to recover at least 15 percent of the braking energy. In such systems some accessories are usually electrified. Strong hybrids are typically referred to as those that have

larger energy recovery and storage capacity, defined at 65 percent braking energy recovery in the light-duty GHG program. Although integration of a strong hybrid system may enable installation of a downsized engine in some cases, the agencies have not projected any vocational engine downsizing for any hybrid systems as part of our Phase 2 technology assessment. This is in part to be conservative in our cost estimates, and in part because in some applications a smaller engine may not be acceptable if it would risk that performance could be sacrificed during some portion of a work day. Depending on the drive cycle and units of measurement, strong hybrids developed to date have seen fuel consumption and CO<sub>2</sub> emissions reductions between 20 and 50 percent in the field.<sup>286</sup>

The agencies are working to reduce barriers related to hybrid vehicle certification. In Phase 1, there is a significant test burden associated with demonstrating the GHG and fuel efficiency performance of vehicles with hybrid powertrain systems. Manufacturers must obtain a conventional vehicle that is identical to the hybrid vehicle in every way except the transmission, test both, and compare the results.<sup>287</sup> In Phase 2, the agencies are proposing that manufacturers would conduct powertrain testing on the hybrid system, and the results of that testing would become inputs to GEM for simulation of the non-powertrain features of the hybrid vehicle, removing a significant test burden.

In discussions with manufacturers during the development of Phase 2, the agencies have learned that meeting the on-board diagnostic requirements for criteria pollutant engine certification continues to be a potential impediment to adoption of hybrid systems. See Section XIV.A.1 for a discussion of regulatory changes proposed to reduce the non-GHG certification burden for engines paired with hybrid powertrain systems. The agencies have also received a letter from the California Air Resources Board requesting consideration of supplemental NO<sub>x</sub> testing of hybrids. The agencies request comment on the Air Resources Board's letter and recommendations.<sup>288</sup>

## (ii) Axles

The agencies are considering two axle technologies for the vocational vehicle sector. The first is advanced low friction axle lubricants. Under contract with NHTSA, SwRI tested improved driveline lubrication and found measurable improvements by switching from current mainstream products to newer formulations focusing on modified viscometric effects.<sup>289</sup> Synthetic lubricant formulations can offer superior thermal and oxidative stability compared to petroleum or mineral based lubricants. The agencies believe that a 0.5 percent improvement in vocational vehicle efficiency (as for tractors) is achievable through the application of low friction axle lubricants, and have included that value as a fixed value in GEM. Beyond the use of different lubricant formulations, some axle manufacturers are offering products that achieve efficiency improvements by varying the lubrication levels with vehicle speed, reducing churning losses. The agencies request comment on whether we could accept these systems as qualifying for a fixed GEM improvement value. If a manufacturer wishes to demonstrate the benefit of a specific axle technology, an off-cycle technology credit would be necessary. To support such an application, manufacturers could conduct a rear axle efficiency test, as described in the draft RIA Chapter 3.8. Proposed regulations for this test procedure can be found at 40 CFR 1037.560. Our estimated axle lubricating costs do not include operational costs such as refreshing lubricants on a periodic basis. Based on supplier information, it is likely that some advanced lubricants may have a longer drain interval than traditional lubricants. We are estimating the axle lubricating costs for HHD to be the same as for tractors since those vehicles likewise typically have three axles. However, for LHD and MHD vocational vehicles, we scaled down the cost of this technology to reflect the presence of a single rear axle.

The second axle technology the agencies are considering is a design that enables one of the rear axles to disconnect or otherwise behave as if it's a non-driven axle, on vehicles with two rear (drive) axles, commonly referred to as a 6x2 configuration. The agencies have considered two types of 6x2 configurations for vocational vehicles:

<sup>284</sup> Green Fleet Magazine, The Latest Developments in EV Battery Technology, November 2013, available at <http://www.greenfleetmagazine.com/article/story/2013/12/the-latest-developments-in-ev-battery-technology-grn/page/1.aspx>.

<sup>285</sup> EPA's and NHTSA's regulations define a hybrid vehicle as one that "includes energy storage features . . . in addition to an internal combustion engine or other engine using consumable chemical fuel. . . ." at 40 CFR 1037.801 and 49 CFR 535.4.

<sup>286</sup> Van Amburg, Bill, CALSTART, Status Report: Alternative Fuels and High-Efficiency Vehicles, Presentation to National Association of Fleet Administrators (NAFA) 2014 Institute and Expo, April 8, 2014.

<sup>287</sup> See test procedures at 40 CFR 1037.555.

<sup>288</sup> California Air Resources Board. Letter from Michael Carter to Matthew Spears dated December 29, 2014. CARB Request for Supplemental NO<sub>x</sub> Emission Check for Hybrid Vehicles. Docket EPA-HA-OAR-2014-0827.

<sup>289</sup> Reinhart, T.E. (June 2015). *Commercial Medium- and Heavy-Duty Truck Fuel Efficiency Technology Study—Report #1*. (Report No. DOT HS 812 146). Washington, DC: National Highway Traffic Safety Administration (the 2015 NHTSA Technology Study). For axle improvements see T-270 Delivery Truck Vehicle Technology Results.

Those that are engaged full time on a vehicle, and those that may be engaged only during some types of vehicle operation, such as only when operating at highway cruise speeds. Some early versions of 6x2 technology offered by manufacturers were not accepted by vehicle owners. When the second drive axle is no longer powered, traction may be sacrificed in some cases. Vehicles with earlier versions of this technology have seen reduced residual values in the secondary market. Over the model years covered by the Phase 2 rules, the agencies expect the market to offer significantly improved versions of this technology, with traction control maintained at lower speeds and efficiency gains at highway cruise speeds.<sup>290</sup> Further information about this technology is provided in the feasibility of the tractor standards, Section III, as well as in draft RIA Chapter 2.4.

The efficiency benefit of a 6x2 axle configuration can be duty-cycle dependent. In many instances, vocational vehicles need to operate off-highway, such as at a construction site delivering materials or dumping at a refuse collection facility. In these cases, vehicles with two drive axles may need the full tractive benefit of both drive axles. The part-time 6x2 axle technology is not expected to measurably improve a vehicle's efficiency for vehicles whose normal duty cycle involves performing significant off-highway work, but the agencies do expect this technology to be recognized over a highway cruise cycle.

Some vocational vehicles in the HHD Regional subcategory may see a 6x2 axle configuration as a reasonable option for improving fuel efficiency. As in Phase 1, our vehicle simulation model assumes that only HHD vehicles have two rear axles, so only these could be recognized for adopting this technology. Further, the agencies don't believe the Multipurpose and Urban subcategories include a significant enough highway cycle weighting in the composite cycle for vehicles that operate in this manner to experience a benefit from adopting this technology. The agencies project this can achieve 2 percent benefit at highway cruise;<sup>291</sup> thus, we propose to assign a fixed value in GEM for part-time 6x2 technology of 2.5 percent over the highway cruise cycles, where the specific improvement would be

calculated according to the composite weighting of the applicable vocational vehicle test cycle. We request comment on the best way to recognize this technology in Phase 2, either through a GEM calculation or a fixed assigned value, for vocational vehicles.

#### (iii) Lower Rolling Resistance Tires

Tires are the second largest contributor to energy losses of vocational vehicles, as found in the energy audit conducted by Argonne National Lab.<sup>292</sup> There is a wide range of rolling resistance of tires used on vocational vehicles today. This is in part due to the fact that the competitive pressure to improve rolling resistance of vocational vehicle tires has been less than that found in the line haul tire market. In addition, the drive cycles typical for these applications often lead vocational vehicle buyers to value tire traction and durability more heavily than rolling resistance. The agencies acknowledge there can be tradeoffs when designing a tire for reduced rolling resistance. These tradeoffs can include characteristics such as wear resistance, cost and scuff resistance. However, based on input from tire suppliers, the agencies expect that the LRR tires that will be available in the Phase 2 timeframe will not compromise performance parameters such as traction, handling, wear, retreadability, or structural durability.

After the Phase 1 rules were promulgated, NHTSA and EPA conducted supplemental tire testing. Other data that have become available to the agencies since Phase 1 include pre-certification data provided to manufacturers by tire suppliers in preparation for MY 2014 vehicle certification.<sup>293</sup> The agencies categorized the data by tire position and vehicle application, so that we have a representation of the variety of LRR vocational vehicle tires that are available in the market for the drive position, steer and all-position tires, as well as wide base singles in all positions. Based on our data set that includes results from multiple laboratories, drive tires that are intended for vocational vehicles have an average CRR of 7.8, and steer and all-position tires that are intended for vocational vehicles have an average CRR of 6.7. The results also indicate that there are a variety of wide based single tires that are intended for vocational vehicles, with an average CRR of 6.6.

Each of these data sets shows several models of commercial tires are available at levels of CRR ranging generally from 20 percent worse than average to 20 percent better than average. Further details are presented in the draft RIA Chapter 2.

According to the 2015 NHTSA Technology Study, vocational vehicles are likely to see the most benefits from reduced tire rolling resistance when they are driving at 55 mph.<sup>294</sup> This report also found an influence of vehicle weight on the benefits of LRR tires. The study found that both vocational vehicles tested had greater benefits of LRR tires at 100 percent payload than when empty. Also, the T270 delivery box truck that was 4,000 lbs heavier when fully loaded saw slightly greater efficiency gains from LRR tires than the F650 flatbed tow truck over the same cycles. At higher speeds, aerodynamic drag grows, which reduces the rolling resistance share of total vehicle power demand. In highly transient cycles, the power required to accelerate the vehicle inertia overshadows the rolling resistance power demand. In simulation, GEM represents vocational vehicles with fixed vehicle weights, payloads and aerodynamic coefficients. Thus, the benefit of LRR tires will be reflected in GEM differently for vehicles of different weight classes. There will also be further differences arising from the different test cycles. Based on preliminary simulations, it appears the vehicles in GEM most likely to see the greatest fuel efficiency gains from use of LRR tires are those in the MHD weight classes tested over the Regional or Multipurpose duty cycles, where one percent efficiency improvement could be achieved by reducing CRR by four to five percent. Those seeing the least benefit from LRR tires would likely be Class 8 vehicles tested over the Urban or Multipurpose cycles, where one percent efficiency improvement could be achieved by reducing CRR by seven to eight percent.

The agencies propose to continue the light truck (LT) tire CRR adjustment factor that was adopted in Phase 1. See generally 76 FR 57172–57174. In Phase 1, the agencies developed this adjustment factor by dividing the overall vocational test average CRR of 7.7 by the LT vocational average CRR of 8.9. This yielded an adjustment factor of 0.87. After promulgation of the Phase 1 rules, the agencies conducted additional tire CRR testing on a variety of LT tires, most of which were designated as all-

<sup>290</sup> NACFE, Confidence Findings on the Potential of 6x2 Axles, available at <http://nacfe.org/wp-content/uploads/2014/01/Trucking-Efficiency-6x2-Confidence-Report-FINAL-011314.pdf>, January 2014 (downloaded November 2014).

<sup>291</sup> See 2015 NHTSA Technology Study, Note 289, T-700 Class 8 Tractor-Trailer Vehicle Technology Results.

<sup>292</sup> See Argonne National Laboratory 2009 report, Note 275, page 91.

<sup>293</sup> See memorandum dated May 2015 on Vocational Vehicle Tire Rolling Resistance Test Data Evaluation.

<sup>294</sup> See 2015 NHTSA Technology Study, Note 289, T-270 Delivery Truck Vehicle Technology Results.

position tires. In addition, manufacturers have submitted to the agencies pre-certification data that include CRR values provided by tire suppliers. For the small subset of newer test tires that were designated as steer tires, the average CRR was 7.8 kg/ton. For the subset of newer test tires that were designated as drive tires, the average CRR was 8.6 kg/ton. However all-position tires had an average CRR of 8.9 kg/ton.<sup>295</sup> Therefore, for LT vocational vehicle tires, we propose to continue allowing the measured CRR values to be multiplied by a 0.87 adjustment factor before entering the values in the GEM for compliance, because this additional testing has not revealed compelling information that a change is needed. We request comment on whether the adjustment factor should be retained, as well as data on which to base a possible update of its numerical value.

As described above in V. B. (4) (c), the agencies are proposing to continue the Phase 1 off-road and low speed exemptions in Phase 2, with the proposed revision of discontinuing the option to qualify for this exemption solely if the vehicle is fitted with tires that have a maximum speed rating at or below 55 mph. The agencies welcome comments on this revision.

#### (iv) Workday Idle Reduction

The Phase 2 idle reduction technologies considered for vocational vehicles are those that reduce workday idling, unlike the overnight idling of combination tractors. There are many potential technologies. The agencies in particular evaluated neutral idle and stop-start technologies, and the proposed standards are predicated on projected amounts of penetrations of these technologies, described in Section V. C. (2). While neutral idle is necessarily a transmission technology, stop-start could range from an engine technology to one that would be installed by a secondary manufacturer under a delegated assembly agreement.

The agencies are aware that for a vocational vehicle's engine to turn off during workday driving conditions, there must be a reserve source of energy to maintain functions such as power steering, cabin heat, and transmission pressure, among others. Stop-start systems can be viewed as having a place on the low-cost end of the hybridization continuum. As described in Section V. C. (2) and in the draft RIA Chapter 2.9, the agencies are including the cost of energy storage sufficient to maintain critical onboard systems and restart the

engine as part of the cost of vocational vehicle stop-start packages. The technologies to capture this energy could include a system of photovoltaic cells on the roof of a box truck, or regenerative braking. The technologies to store the captured energy could include a battery or a hydraulic pressure bladder. More discussion of stop-start technologies is found in the draft RIA Chapter 2.4.

The agencies intend for the technologies that would qualify to be recognized in GEM as stop-start to be broadly defined, including those that may be installed at different stages in the manufacturing process. The agencies request comment on an appropriate definition of stop-start technologies for vocational vehicles.

The agencies are also proposing a certification test cycle that measures the amount of fuel saved and CO<sub>2</sub> reduced by these two primary types of idle reduction technologies: neutral idle and stop-start. Vocational vehicles frequently also idle while cargo is loaded or unloaded, and while operating a PTO such as compacting garbage or operating a bucket. In these rules, the agencies are proposing that the Regional duty cycle have ten percent idle, the Multi-purpose cycle have 15 percent idle, and the Urban cycle have 20 percent idle. These estimates are based on publically available data published by NREL.<sup>296</sup> To bolster this information, EPA entered into an interagency agreement with NREL to characterize workday idle among vocational vehicles. One task of this agreement is to estimate the nationally representative fraction of idle operation for vocational vehicles for each proposed regulatory subcategory including a distinction between idling while driving or stopping in gear, and idling while parked. The preliminary range of total daily idle operation per vehicle indicated by this work is about 18 percent to 33 percent when combining the data from all available vehicles. The agencies request comment regarding the nature of vocational workday idle operation, including how much of it is in traffic and how much is while the vehicle is parked. Depending on comments and additional information received during the comment period, it may be within the agencies' discretion to adopt different final test cycles, or re-weight the current test cycles, to better represent real world driving and better reflect performance of the technology packages. An analysis of possible vocational vehicle standards

derived from alternate characterizations of idle operation has been prepared by the agencies, and is available for review in the public docket for this rulemaking.<sup>297</sup>

Based on GEM simulations using the currently proposed vocational vehicle test cycles, the agencies estimate neutral idle for automatic transmissions to provide fuel efficiency improvements ranging from one percent to nearly four percent, depending on the regulatory subcategory. The agencies estimate stop-start to provide fuel efficiency improvements ranging from 0.5 percent to nearly seven percent, depending on the regulatory subcategory. Because of the higher idle weighting factor in the Urban test cycle, vehicles certified in these subcategories would derive the greatest benefit from applying idle reduction technologies.

Although the primary program would not simulate vocational vehicles over a test cycle that includes PTO operation, the agencies are proposing to continue, with revisions, the hybrid-PTO test option that was in Phase 1. See 76 FR 57247 and 40 CFR 1037.525 (proposed to be redesignated as 40 CFR 1037.540). Recall that we are proposing to regulate vocational vehicles at the incomplete stage when a chassis manufacturer may not know at the time of certification whether a PTO will be installed or how the vehicle will be used. Based on stakeholder input, chassis manufacturers are expected to know whether a vehicle's transmission is PTO-enabled. However, that is very different from knowing whether a PTO will actually be installed and how it will be used. Chassis manufacturers may rarely know whether the PTO-enabled vehicle will use this capability to maneuver a lift gate on a delivery vehicle, to operate a utility boom, or merely to keep it as a reserve item to add value in the secondary market. In cases where a manufacturer can certify that a PTO with an idle-reduction technology will be installed either by the chassis manufacturer or by a second stage manufacturer, the hybrid-PTO test cycle may be utilized by the certifying manufacturer to measure an improvement factor over the GEM duty cycle that would otherwise apply to that vehicle. In addition, the delegated assembly provisions would apply. See Section V.E for a description of the delegated assembly provisions. See draft RIA Chapter 3 for a discussion of the proposed revisions to the PTO test cycle.

<sup>296</sup> See NREL data at [http://www.nrel.gov/vehiclesandfuels/fleettest/research\\_fleet\\_dna.html](http://www.nrel.gov/vehiclesandfuels/fleettest/research_fleet_dna.html).

<sup>297</sup> See memorandum dated May 2015 on Analysis of Possible Vocational Vehicle Standards Based on Alternative Idle Cycle Weightings.

<sup>295</sup> See tire memorandum, Note 293.

The agencies have reason to believe there may be a NO<sub>x</sub> co-benefit to stop-start idle reduction technologies, e-PTO, and possibly also to neutral idle. For this to be true, the benefits of reduced fuel consumption and retained aftertreatment temperature would have to outweigh any extra emissions due to re-starts. In the draft RIA Chapter 2.9, there is a more detailed discussion of the relationship between idle reduction and NO<sub>x</sub> co-benefits. The agencies request comments and relevant test data that can help inform this issue.

#### (v) Weight Reduction

The agencies believe there is opportunity for weight reduction in some vocational vehicles. According to the 2009 TIAx report, there are freight-efficiency benefits to reducing weight on vocational vehicles that carry heavy cargo, and tax savings potentially available to vocational vehicles that remain below excise tax weight thresholds. This report also estimates that the cost effectiveness of weight reduction over urban drive cycles is potentially greater than the cost effectiveness of weight reduction for long haul tractors and trailers. On a city duty cycle, 89 percent of the vehicle's road load is weight dependent, compared to 38 percent on a steady-state 55 mph duty cycle.<sup>298</sup> The 2015 NHTSA Technology Study found that weight reduction provides a greater fuel efficiency benefit for vehicles driving under transient conditions than for those operating under constant speeds. In simulation, the study found that the two Class 6 trucks improved fuel efficiency by over two percent on the ARB transient cycle by removing 1,100 lbs. Further, SwRI observed that the improvements due to weight reduction behaved linearly.<sup>299</sup> The proposed menu of components available for a vocational vehicle weight credit in GEM is presented in Section V.E and in the draft RIA Chapter 2.9. It includes fewer options than for tractors, but the agencies believe there are a number of feasible material substitution choices at the chassis level, which could add up to weight savings on the order of a few hundred lbs. The agencies project that refuse trucks, construction vehicles, and weight-limited regional delivery vehicles could reasonably apply material substitution for weight reduction. We do not expect this to be broadly applicable across many types of

vocational vehicles. Based on the assumed payload in GEM, and depending on the vocational vehicle subcategory, the agencies believe a reduction of 200 lbs may offer a fuel efficiency improvement of approximately 1 to 2 percent.

Without more specific data on which to base our assumptions, the agencies are proposing to allocate 50 percent of any mass reduction to increased payload, and 50 percent to reduce the chassis weight. We considered the data on which the tractor weight allocation (1/3:2/3) is based, but determined this would not be valid for vocational vehicles, as the underlying data pertained only to long haul tractor-trailers. The agencies propose that 50 percent of weight removed from vocational vehicle chassis would be added back as additional payload in GEM. This suggests an equal likelihood that a vehicle would be reducing weight for benefits of being lighter, or reducing weight to carry more payload. The agencies welcome data that could better inform the fraction of weight reduced for vocational vehicles that is added back as payload.

The agencies request comment on whether the HD Phase 2 program should recognize that weight reduction of rotating components provides an enhanced fuel efficiency benefit over weight reduction on static components. In theory, as components such as brake rotors, brake drums, wheels, tires, crankshafts, camshafts, and piston assemblies become lighter, the power consumption to rotate the masses would be directly proportional to the mass decrease. Using physical properties of a rotating component such as a wheel, it is relatively straightforward to calculate an equivalent mass. However, we do not have enough information to derive industry average values for equivalent mass, nor have we evaluated the best way for GEM to account for this.

#### (vi) HFC Refrigerant From Cabin Air Conditioning (A/C) Systems

Manufacturers can reduce direct A/C leakage emissions by utilizing leak-tight components. EPA's proposed HFC direct emission leakage standard would be independent of the CO<sub>2</sub> vehicle standard. Manufacturers could choose components from a menu of leak-reducing technologies sufficient to comply with the standard, as opposed to using a test to measure performance. See 76 FR 57194.

In Phase 1, EPA adopted a HFC leakage standard to assure that high-quality, low-leakage components are used in each air conditioning system installed in HD pickup trucks, vans, and

combination tractors (see 40 CFR 1037.115). We did not adopt a HFC leakage standard in Phase 1 for systems installed in vocational vehicles. EPA is proposing in Phase 2 to extend the HFC leakage standard that exists due to Phase 1 requirements to all vocational vehicles. Beginning in the 2021 model year, EPA proposes that vocational vehicle air conditioning systems with a refrigerant capacity of greater than 733 grams meet a leakage rate of 1.50 percent leakage per year and systems with a refrigerant capacity of 733 grams or lower meet a leakage standard of 11.0 grams per year. EPA believes this proposed approach of having a leak rate standard for lower capacity systems and a percent leakage per year standard for higher capacity systems would result in reduced refrigerant emissions from all air conditioning systems, while still allowing manufacturers the ability to produce low-leak, lower capacity systems in vehicles which require them.

EPA believes that reducing A/C system leakage is both highly cost-effective and technologically feasible. The availability of low leakage components is being driven by the air conditioning program in the light-duty GHG rule which began in the 2012 model year and the HD Phase 1 rule that began in the 2014 model year. The cooperative industry and government Improved Mobile Air Conditioning program has demonstrated that new-vehicle leakage emissions can be reduced by 50 percent by reducing the number and improving the quality of the components, fittings, seals, and hoses of the A/C system.<sup>300</sup> All of these technologies are already in commercial use and exist on some of today's systems, and EPA does not anticipate any significant improvements in sealing technologies for model years beyond 2021. However, EPA has recognized some manufacturers utilize an improved manufacturing process for air conditioning systems, where a helium leak test is performed on 100 percent of all o-ring fittings and connections after final assembly. By leak testing each fitting, the manufacturer or supplier is verifying the o-ring is not damaged during assembly (which is the primary source of leakage from o-ring fittings), and when calculating the yearly leak rate for a system, EPA will allow a relative emission value equivalent to a 'seal washer' can be used in place of the value normally used for an o-ring fitting, when 100 percent helium leak testing is performed on those fittings. The agencies request comment on other

<sup>298</sup> Helms 2003 as referenced in TIAx 2009.

<sup>299</sup> See 2015 NHTSA Technology Study, Note 289, T-270 Delivery Truck Vehicle Technology Results and Vehicle Performance in the F-650 Truck.

<sup>300</sup> Team 1-Refrigerant Leakage Reduction: Final Report to Sponsors, SAE, 2007.

possible improvements in the design of air conditioning systems that EPA could recognize for the purposes of compliance with this proposed standard. For example, should the agency recognize electrified compressors as having a zero leak rate, and should we allow vehicles fitted with electrified compressors to use a simplified version of the compliance reporting form? Please see Section I.F.1 (b) of this preamble for a description of proposed program-wide revisions to EPA's HFC leakage standards that would address air conditioning systems designed for alternative refrigerants.

The HFC control costs presented in the draft RIA Chapter 2.9 and 2.12 are applied to all heavy-duty vocational vehicles. EPA views these costs as minimal and the reductions of potent GHGs to be easily feasible and reasonable in the lead times provided by the proposed rules.

#### (b) Engine Technologies Considered in Vehicle Standard-Setting

Section II explains the technical basis for the agencies' proposed separate engine standards. The agencies are not proposing to predicate the vocational vehicle standards on different diesel engine technology packages than those presumed for compliance with the separate diesel engine standards. However, for the proposed MY 2027 vocational vehicle standards, the agencies are predicating the SI-powered vocational vehicle standards on a gasoline engine technology package that includes additional friction reduction beyond that presumed for compliance with the MY 2016 gasoline engine standard. Chapter 2 of the draft RIA provides more details on each of the technologies that can be applied to both gasoline and diesel engines.

The vehicle-level standards would vary depending on whether the engines powering those vehicles are compression-ignition or spark-ignition.<sup>301</sup> In Phase 1, this was not the case because GEM used a default engine that was the same for every vehicle configuration, regardless of the actual engine being installed. As described above in Section II, the Phase 2 vehicle certification tool, GEM, would require manufacturers to enter specific engine performance data, where emissions and fuel consumption profiles would differ

significantly depending on the engine's architecture.<sup>302</sup>

As explained in Section II.A.2, engines would continue to be certified over the FTP test cycle. The FTP test cycle that is applicable for bare vocational engines is very different than the proposed test cycles for vocational vehicles in GEM. The FTP is a very demanding transient cycle that exercises the engine over its full range of capabilities. In contrast, the cycles evaluated by GEM measure emissions over more frequently used engine operating ranges. The ARB Transient vehicle cycle represents city driving, and the highway cruise cycles measure engine operation that is closer to steady state. Each of these cycles is described in the draft RIA Chapter 3. A consequence of recognizing engine performance at the vehicle level would be that further engine improvements (*i.e.* improvements measureable by duty cycles that more precisely represent driving patterns for specific subcategories of vocational vehicles) could be evaluated as possible components of a technical basis for a vocational vehicle standard.<sup>303</sup> For this reason, the agencies considered whether any different engine technologies should be included in the feasibility analysis for the vehicle standards (and potentially, in the proposed standard stringency).

One CI engine technology that might be recognized over a vehicle highway cruise cycle would be waste heat recovery (WHR). However, the agencies do not consider this to be a feasible technology for vocational engines. As described in Section II of this preamble and Chapter 2.3 of the draft RIA, there currently are no commercially available WHR systems for diesel engines, although most engine manufacturers are exploring this technology. While it would be possible to capture excess heat from a vocational engine operating at highway speeds, many vocational vehicles spend insufficient time at highway speeds to generate enough excess heat to make this technology worthwhile. As explained in Section II.D, the agencies are projecting a very small adoption rate of WHR even in the tractor engine market. Because the research is currently being conducted to apply this technology for tractors, it is logical that future research may reveal ways to adapt this technology for those

vocational engines that are intended for on-highway applications. The agencies do not believe this technology will be developed to the point of commercial readiness for vocational vehicles in the time frame of these proposed rules.

The agencies assessed three SI engine technologies for possible inclusion in the vocational vehicle technology packages: cylinder deactivation, variable valve timing, and advanced friction reduction. These might be recognized over the proposed vocational vehicle test cycles in GEM through use of the proposed engine mapping procedures. To the extent either cylinder deactivation or variable valve timing would be adopted for complete heavy-duty pickups and vans, they would be recognized over the complete chassis test specified for that segment and possibly over the GEM highway cruise cycles, however the aggressive bare engine FTP test is unlikely to put the engine into operating modes that activate either of those technologies. Based on stakeholder input, the agencies project that the SI engines certified over the FTP and fitted into vocational vehicles would most likely be designed as overhead valve engines, for which the only kind of VVT available is dual cam phasing.<sup>304</sup> Dual cam phasing is already included at 100 percent adoption rate in the feasibility and stringency of the MY 2016 bare engine standard. If manufacturers choose to fit vocational vehicles with coaxial camshaft SI engines, additional VVT options would be feasible and could be recognized over the vocational vehicle test cycles. Based on stakeholder input, the agencies project that some SI engines certified over the FTP and fitted into vocational vehicles may be designed with cylinder deactivation by MY 2021. However, the agencies do not have enough information at this time to quantify the potential fuel efficiency improvements over the vocational vehicle test cycles for engines with cylinder deactivation or various designs implementing VVT. Therefore we are not proposing to predicate the SI-powered vocational vehicle standards on use of these technologies.

In Section II.D, the agencies explain why we are not proposing a more stringent separate SI vocational engine standard in Phase 2 based on additional engine technologies beyond those assumed for the Phase 1 MY 2016 standard. The agencies are instead proposing to include adoption and performance of advanced engine friction reduction technology as a basis for the

<sup>301</sup> Specifically, EPA is proposing CO<sub>2</sub>, N<sub>2</sub>O, and CH<sub>4</sub> emission standards for new heavy-duty engines over an EPA specified useful life period (*See* Section II).

<sup>302</sup> See Section II.D.5 for an explanation of which engine architecture would need to meet which standard.

<sup>303</sup> As noted in II.B.2 above, manufacturers also have greater flexibility to meet a vehicle standard if engine improvements can be evaluated as part of compliance testing.

<sup>304</sup> See preamble Section VI.C.5.(a) under Coupled Cam Phasing.



proposed SI-powered vocational vehicle standards. Based on Volpe model results presented in preamble Section VI, the agencies project that manufacturers of some SI engines for complete HD pickups would apply advanced friction reduction. Level 2 engine friction reduction is listed in Table VI–3, and costs are presented in the draft RIA Chapter 2.12. We expect some engines with this technology would be engine-certified and sold for use in vocational vehicles. We are projecting an overall effectiveness of 0.6 percent improvement over the GEM cycles for this technology, calculated using a per-vehicle effectiveness of 1.1 percent and a vocational vehicle adoption rate of 56 percent. We request comment on the merits of setting a SI-based vocational vehicle standard predicated on adoption of SI engine technologies.

(c) Technologies the Agencies Assessed but Did Not Use in Standard-Setting

(i) Aerodynamics

The Argonne National lab work shows that aerodynamics has less of an impact on vocational vehicle energy losses than do engines or tires.<sup>305</sup> Further, when a vehicle spends significant time at slower speeds, the disbenefit of the added weight of the aero devices diminishes the benefit obtained when driving at high speeds. In addition, the aerodynamic performance of a complete vehicle is significantly influenced by the body of the vehicle. As noted above, the agencies are not proposing to regulate body builders for the reasons discussed in Phase 1.

The NAS 2010 report estimated a one percent fuel efficiency improvement could be achieved from a full aerodynamic package on a box truck with an average speed of 30 mph.<sup>306</sup> Both from the NAS 2010 report and from experiences of EPA's SmartWay team, the agencies expect the potential benefits of aerodynamics at an average speed of 60 mph would be diminished by 50 percent or more when average speeds are closer to 40 mph. The proposed Regional composite duty cycle in GEM for vocational vehicles (the test cycle with the most highway weighting) has a weighted average speed of 39 mph.

The 2015 NHTDA Technology Study simulated a Class 6 box truck with a coefficient of aerodynamic drag that had been improved by 15 percent. Over transient test cycles, this produced a one percent fuel efficiency benefit,

though this produced results of approximately seven percent improvement over the 55 mph and eight percent over the 65 mph cycle. SwRI conducted coastdown testing to determine the baseline  $C_{DA}$  of the truck, of 5.0.<sup>307</sup> However, it is unknown what aerodynamic technologies could be applied to yield a 15 percent improvement in  $C_{DA}$ . Using these simulation results and the proposed Regional cycle weightings of 22 percent at 65 mph and 28 percent at 55 mph, the agencies estimate the fuel efficiency benefit of improving the  $C_{DA}$  of a Class 6 box truck by 15 percent could be approximately four percent. This assumes no penalty for carrying the weight of the aerodynamic devices while operating under transient driving conditions.

Because we do not have information on specific technologies that could be applied to vocational vehicles to yield a 15 percent improvement in  $C_{DA}$ , or their costs, we are not basing any of the proposed standards for vocational vehicles on aerodynamic improvements. Nonetheless, we are working with CARB to incorporate into GEM some data from testing that is being conducted by CARB through NREL. A test plan is underway to assess the fuel efficiency benefit of three different devices to improve the aerodynamic performance of a Class 6 box truck and one device on a Class 4 box truck. The agencies request comment on allowing a manufacturer to obtain an improved GEM result by certifying that a final vehicle configuration will closely match one of the configurations on which this testing was conducted, where the improvement would be based on installation of specific aerodynamic devices for which we have pre-defined effectiveness through this testing program. The amount of improvement would be set by EPA and NHTSA based on NREL's test results. This credit provision would apply only to vocational vehicles certified over the Regional duty cycle. Manufacturers wishing to receive credit for other aerodynamic technologies or on other vehicle configurations would be able to seek credit for it as an off-cycle technology. See Section V.E, for a description of regulatory flexibilities such as off-cycle technology credits.

A description of vehicles and aerodynamic technologies that could be eligible for this option, as well as a description of the testing conducted to obtain the assigned GEM improvements due to these technologies, can be found

in a memorandum to the docket.<sup>308</sup> The agencies seek comment on this potential approach to providing credits for aerodynamic aids to vocational box trucks.

(ii) Full Electric Trucks

Some heavy-duty vehicles can be powered exclusively by electric motors. Electric motors are efficient and able to produce high torque, giving e-trucks strong driving characteristics, particularly in stop-and-go or urban driving situations, and are well-suited for moving heavy loads. Electric motors also offer the ability to operate with very low noise, an advantage in certain applications. Currently, e-trucks have some disadvantages over conventional vehicles, primarily in cost, weight and range. Components are relatively expensive, and storing electricity using currently available technology is expensive, bulky, and heavy.

The West Coast Collaborative, a public-private partnership, has estimated the incremental costs for electric Class 3–6 trucks in the Los Angeles, CA, area.<sup>309</sup> Compared to a conventional diesel, the WCC estimates a BEV system would cost between \$70,000 and \$90,000 more than a conventional diesel system. The CalHEAT Technology Roadmap includes an estimate that the incremental cost for a fully-electric medium- or heavy- duty vehicle would be between \$50,000 and \$100,000. This roadmap report also presents several actions that must be taken by manufacturers and others, before heavy-duty e-trucks can reach what they call Stage 3 Deployment.<sup>310</sup>

Early adopters of electric drivetrain technology are medium-heavy-duty vocational vehicles that are not weight-limited and have drive cycles where they don't need to go far from a central garage. Examples include Frito-Lay. CalHEAT has published results of a comprehensive performance evaluation of three battery electric truck models using information and data from in-use data collection, on road testing and chassis dynamometer testing.<sup>311</sup>

<sup>308</sup> See May 2015 memorandum to the docket titled Vocational Vehicle Aerodynamic Testing Program.

<sup>309</sup> See <http://westcoastcollaborative.org/files/sector-fleets/WCC-LA-BEVBusinessCase2011-08-15.pdf>.

<sup>310</sup> Silver, Fred, and Brotherton, Tom. (CalHEAT) Research and Market Transformation Roadmap to 2020 for Medium- and Heavy-Duty Trucks. California Energy Commission, June 2013.

<sup>311</sup> Gallo, Jean-Baptiste, and Jasna Tomic (CalHEAT). 2013. Battery Electric Parcel Delivery Truck Testing and Demonstration. California Energy Commission.

<sup>305</sup> See Argonne National Laboratory 2009 report, Note 275, above.

<sup>306</sup> See Table 5–10 of the NAS 2010 report, Note 136.

<sup>307</sup> See 2015 NHTSA Technology Study, Note 289, Appendix C.



Given the high costs and the developing nature of this technology, the agencies do not project fully electric vocational vehicles to be widely commercially available in the time frame of the proposed rules. For this reason, the agencies have not based the proposed Phase 2 standards on adoption of full-electric vocational vehicles. To the extent this technology is able to be brought to market in the time frame of the Phase 2 program, there is currently a certification path for these chassis from Phase 1, as described in Section V.E and in EPA's regulations at 40 CFR 1037.150 and NHTSA's regulations at 49 CFR 535.8.

#### (iii) Electrified Accessories

Accessories that are traditionally gear- or belt-driven by a vehicle's engine can be optimized and/or converted to electric power. Examples include the engine water pump, oil pump, fuel injection pump, air compressor, power-steering pump, cooling fans, and the vehicle's air-conditioning system. Optimization and improved pressure regulation may significantly reduce the parasitic load of the water, air and fuel pumps. Electrification may result in a reduction in power demand, because electrically-powered accessories (such as the air compressor or power steering) operate only when needed if they are electrically powered, but they impose a parasitic demand all the time if they are engine-driven. In other cases, such as cooling fans or an engine's water pump, electric power allows the accessory to run at speeds independent of engine speed, which can reduce power consumption. Electrification of accessories can individually improve fuel consumption, regardless of whether the drivetrain is a strong hybrid. The TIAx study used 2 to 4 percent fuel consumption improvement for accessory electrification, with the understanding that electrification of accessories will have more effect in short haul/urban applications and less benefit in line-haul applications.<sup>312</sup>

Electric power steering (EPS) or Electrohydraulic power steering (EHPS) provides a potential reduction in CO<sub>2</sub> emissions and fuel consumption over hydraulic power steering because of reduced overall accessory loads. This eliminates the parasitic losses associated with belt-driven power steering pumps which consistently draw load from the engine to pump hydraulic fluid through the steering actuation systems even when the wheels are not being turned. EPS is an enabler for all vehicle hybridization technologies since

it provides power steering when the engine is off. EPS is feasible for most vehicles with a standard 12V system. Some heavier vehicles may require a higher voltage system which may add cost and complexity.

The agencies are projecting that some electrified accessories will be necessary as part of the development of stop-start idle reduction systems for vocational vehicles. However, the agencies have not developed a pre-defined credit-generating option for manufacturers to directly receive credit in GEM for electrified accessories on vocational vehicles. Manufacturers wishing to conduct independent testing may apply for off-cycle credits derived from electrified accessories.

#### (iv) E-PTO

There are products available today that can provide auxiliary power, usually electric, to a vehicle that needs to work in PTO mode for an extended time, to avoid idling the main engine. There are different designs of electrified PTO systems on the market today. Some designs have auxiliary power sources, typically batteries, with sufficient energy storage to power an onboard tool or device for a short period of time, and are intended to be recharged during the workday by operating the main engine, either while driving between work sites, or by idling the engine until a sufficient state of charge is reached that the engine may shut off. Other designs have sufficient energy storage to power an onboard tool or device for many hours, and are intended to be recharged as a plug-in hybrid at a home garage. The agencies are proposing to continue the hybrid-PTO test option that was available in Phase 1, with a few revisions. See the proposed regulations at 40 CFR 1037.540. The current test procedure is a charge-sustaining procedure, meaning the test is not complete until the energy storage system is depleted and brought back to its original state of charge. The agencies request comment and data relating to the population and energy storage capacity of plug-in e-PTO systems, for which a charge-depleting test cycle may be more appropriate. For the reasons described above in Section V.C.1.a.iv, the agencies are not basing the proposed vocational vehicle standards on use of electrified PTO or hybrid PTO technology. Manufacturers wishing to conduct testing as specified may apply for off-cycle credits derived from e-PTO or hybrid PTO technologies.

#### (2) Projected Vehicle Technology Package Effectiveness and Cost

##### (a) Baseline Vocational Engine and Vehicle Performance

The proposed baseline vocational vehicle configurations for each of the nine proposed regulatory subcategories are described in draft RIA Chapter 2.9 and Chapter 4.4. The agencies propose to set the baseline rolling resistance coefficient for the 2017 vocational vehicle fleet at 7.7 kg/metric ton, which assumes 100 percent of tires meet the Phase 1 standard.

In the agencies' proposed baseline configurations, we include torque converter automatics with five forward gears in eight of the nine subcategories. In the Regional HHD subcategory, the baseline includes a manual transmission with ten forward gears. No additional vehicle-level efficiency-improving technology is included in the baseline vehicles, nor in the agencies' analyses for the no-action reference case. Specifically, we have assumed zero adoption rates for other types of transmissions, increased numbers of gears, idle reduction, and technologies other than Phase 1 compliant LRR tires in both the nominally flat baseline and the dynamic baseline reference cases. Technology adoption rates for Alternative 1a (nominally flat baseline) can be found in the draft RIA Chapter 2.12. Chapter 2.12.8 presents the adoption rates for tires on vocational vehicles with different levels of rolling resistance, including the 100 percent adoption rate of tires with Level 1 CRR in the reference case and in model years preceding Phase 2. In this manner, we have defined a reference vocational vehicle fleet that meets the Phase 1 standards and includes reasonable representations of vocational vehicle technology and configurations. Details of the vehicle configurations, including reasons why they are reasonably included as baseline technologies, are discussed in the draft RIA Chapter 2.9.

The agencies note that the baseline performance derived for the proposed rules varies between regulatory subcategories—as noted above, this is the reason the agencies are proposing the further subcategories. The range of performance at baseline is due to the range of attributes and modeling parameters, such as transmission characteristics, final drive ratio, and vehicle weight, which were selected to represent a range of performance across this diverse segment. The agencies request comment on whether the proposed configurations adequately represent a reasonable range of vocational chassis configurations likely

<sup>312</sup> TIAx 2009, Note 137, pp. 3–5.

to be manufactured in the implementation years of the Phase 2 program. We especially are interested in comments regarding the following driveline parameters: Transmission gear ratios, axle ratios, and tire radii.

The baseline engine fuel consumption represents improvements beyond currently available engines to achieve the efficiency of what the agencies believe would be a 2017 model year diesel engine, as described in the draft RIA Chapter 2. Using the values for compression-ignition engines, the

baseline performance of vocational vehicles is shown in Table V–11.

Different types of diesel engines are used in vocational vehicles, depending on the application. They fall into the categories of Light, Medium, and Heavy Heavy-duty Diesel engines. The Light Heavy-duty Diesel engines typically range between 4.7 and 6.7 liters displacement. The Medium Heavy-duty Diesel engines typically have some overlap in displacement with the Light Heavy-duty Diesel engines and range between 6.7 and 9.3 liters. The Heavy

Heavy-duty Diesel engines typically are represented by engines between 10.8 and 16 liters. Because of these differences, the GEM simulation of baseline vocational CI engines includes four engines—one for LHD, one for MHD, and two for HHD. Detailed descriptions can be seen in Chapter 4 of the draft RIA. These four engine models have been employed in setting the vocational vehicle baselines, as described in the draft RIA Chapter 2.9.

TABLE V–11—BASELINE VOCATIONAL VEHICLE PERFORMANCE WITH CI ENGINES

Duty cycle	Light heavy-duty class 2b–5	Medium heavy-duty class 6–7	Heavy heavy-duty class 8
<b>Baseline Emissions Performance in CO<sub>2</sub> gram/ton-mile</b>			
Urban .....	316	201	212
Multi-Purpose .....	325	203	214
Regional .....	339	199	203
<b>Baseline Fuel Efficiency Performance in gallon per 1,000 ton-mile</b>			
Urban .....	31.0413	19.7446	20.8251
Multi-Purpose .....	31.9253	19.9411	21.0216
Regional .....	33.3006	19.5481	19.9411

The agencies intend to develop a model in GEM of a MY 2016-compliant gasoline engine, but we have been unable to obtain sufficient information to complete this process. The agencies request comments on the process for mapping gasoline engines for simulation purposes, as well as information about the power rating and displacement that should be considered as a baseline SI engine for vocational vehicle standard-setting purposes. In lieu of a SI engine map, the agencies have applied a correction factor to the GEM CI vocational simulation results, to approximate the baseline performance of a SI-powered vocational vehicle. The SI-powered vocational vehicle baseline performance shown in Table V–12 was calculated from applying an adjustment factor to the respective CI-powered vocational vehicle baseline values. This CI to SI baseline adjustment factor is derived from the Phase 1 HD pickup and van stringency curves, as described in the draft RIA Chapter 2.9.1. The correction factor approach is not the agencies' preferred approach, as it has

many drawbacks. One key drawback with this approach is that it does not account for the fact that SI engines operate very differently than CI engines at idle. Our current model includes information on CI engine idle performance, and assumes transmissions and torque converters appropriate for CI engines. We expect these driveline parameters would be very different for SI powered vehicles, which would affect performance over all the GEM duty cycles.

The baseline performance levels for HHD vocational vehicles powered by SI engines were derived using the same procedures described above for the MHD and LHD vehicles, adjusting the performance of the HHD CI powered vocational vehicles by the same degree as for the other vehicles. However, we expect that any gasoline Class 8 vocational vehicle would be powered by a MHD SI engine, as there are no HHD gasoline engines on the market. Further, we expect that if we were to develop an engine map for use in simulating heavier SI vocational vehicles in GEM,

we could establish a more representative baseline performance level by calculating the work done by the MHD engine to move the heavier vehicle over the test cycles. The agencies request comments on the merits of developing separate baseline levels and numerical standards for HHD vocational vehicles powered by SI engines, including any benefits that could be obtained by addressing this unlikely occurrence and other ways in which the agencies could avoid the instance of an orphaned SI vocational vehicle. Commenters who favor separate numerical standards are encouraged to submit information related to appropriate default vehicle characteristics such as weight and payload. Depending on comments, the agencies could choose to require all Class 8 vocational vehicles to certify to the standards for CI powered HHD vocational vehicles, or we could require SI powered Class 8 vocational vehicles to certify to the MHD standards for SI vocational vehicles.

TABLE V–12—BASELINE VOCATIONAL VEHICLE PERFORMANCE WITH SI ENGINES

Duty cycle	Light heavy-duty Class 2b–5	Medium heavy-duty Class 6–7	Heavy heavy-duty Class 8
<b>Baseline Emissions Performance in CO<sub>2</sub> gram/ton-mile</b>			
Urban .....	334	213	224

TABLE V-12—BASELINE VOCATIONAL VEHICLE PERFORMANCE WITH SI ENGINES—Continued

Duty cycle	Light heavy-duty Class 2b-5	Medium heavy-duty Class 6-7	Heavy heavy-duty Class 8
Multi-Purpose .....	344	215	226
Regional .....	358	211	214
<b>Baseline Fuel Efficiency Performance in gallon per 1,000 ton-mile</b>			
Urban .....	37.5830	23.9676	25.2054
Multi-Purpose .....	38.7082	24.1926	25.4304
Regional .....	40.2836	23.7425	24.0801

## (b) Technology Packages for Derivation of Proposed Standards

Prior to developing the numerical values for the proposed standards, the agencies projected the mix of new technologies and technology improvements that would be feasible within the proposed lead time. We note that for some technologies, the adoption rates and effectiveness may be very similar across subcategories. However, for other technologies, either the adoption rate, effectiveness, or both differ across subcategories. The standards being proposed reflect the technology projected for each service class. Where a technology performs differently over different test cycles, these differences are reflected to some extent in the derivation of the stringency of the proposed standard. However, the proposed standard stringency does reflect, to some extent, the ability of manufacturers to utilize credits. For example, we project that hybrid vehicles would generally be certified in the Urban subcategory and would generate emission credits that would most likely be used in the other

subcategories within the weight class group.<sup>313</sup>

As part of the derivation of the numerical standards, we performed a benchmarking analysis to inform our development of standards that would have roughly equivalent stringency among the duty-cycle-based subcategories within each weight class group. To do this, the agencies assessed the performance of broadly applicable technologies, such as low rolling resistance tires, on each of the selected baseline vehicles over each of the duty cycles. We then evaluated how much improvement could be achieved over the various duty cycles for a vehicle that incorporated all the broadly applicable technologies, but which did not include a hybrid powertrain. We simulated neutral idle for benchmarked vehicles for MY 2021 and MY 2024, and simulated stop-start idle reduction on the benchmarked MY 2027 vehicles. From this, we learned that a vehicle with neutral idle and a deeply integrated conventional powertrain, with moderately low rolling resistance tires and some weight reduction could easily meet the proposed standards in

the early implementation years of the program, in any weight class or duty cycle. We also learned how the effectiveness of tire rolling resistance and weight reduction vary in GEM (*i.e.* and therefore likely in actual operation) across the different subcategories. We also found that a vehicle with a deeply integrated conventional powertrain, tires with even lower CRR, some weight reduction, and stop-start idle reduction could achieve the MY 2027 proposed standards. However, our technology feasibility does not presume that 100 percent of vocational vehicles can reasonably apply deep powertrain integration, nor do we project 100 percent adoption of LRR tires or weight reduction.

The technologies assumed for the benchmarked vehicles are summarized in Table V-13, Table V-14, and Table V-15. Note that the agencies are not projecting that these are the vehicles that would actually be produced. Rather, these theoretical vehicles are being evaluated to compare the relative stringency of the standards for each subcategory.

TABLE V-13—GEM INPUTS FOR BENCHMARKED MY 2021 VOCATIONAL VEHICLES

Class 2b-5			Class 6-7			Class 8		
Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
<b>Transmission</b>								
<b>100% Deep Transmission Integration for 7% Urban, 6% Multipurpose, 5% Regional</b>								
5s AT	5s AT	5s AT	5s AT	5s AT	5s AT	5s AT	5s AT	10s AMT

<sup>313</sup> See averaging sets at 40 CFR 1037.740.

Class 2b–5			Class 6–7			Class 8		
Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
CI Engine <sup>a</sup>								
2021 MY 7L, 200 hp Engine			2021 MY 7L, 270 hp Engine			2021 MY 11L, 345 hp Engine		2021 MY 15L 455hp Engine
100% Idle Reduction = Neutral Idle								
100% improved axle lubrication: 0.5%								
100% Steer Tires with CRR 6.9 kg/metric ton								
100% Drive Tires with CRR 7.3 kg/metric ton								
Weight Reduction 200 lb								

<sup>a</sup>SI engines were not simulated in GEM.

Class 2b–5			Class 6–7			Class 8		
Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
Transmission								
100% Deep Transmission Integration for 7% Urban, 6% Multipurpose, 5% Regional								
5s AT	5s AT	5s AT	5s AT	5s AT	5s AT	5s AT	5s AT	10s AMT
CI Engine <sup>a</sup>								
2024 MY 7L, 200 hp Engine			2024 MY 7L, 270 hp Engine			2024 MY 11L, 345 hp Engine		2024 MY 15L 455hp Engine
100% Idle Reduction = Neutral Idle								
100% improved axle lubrication: 0.5%								
100% Steer Tires with CRR 6.7 kg/metric ton								
100% Drive Tires with CRR 7.1 kg/metric ton								
Weight Reduction 200 lb								

<sup>a</sup>SI engines were not simulated in GEM.

Class 2b–5			Class 6–7			Class 8		
Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
<b>Transmission</b>								
<b>100% Deep Transmission Integration for 7% Urban, 6% Multipurpose, 5% Regional</b>								
5s AT	5s AT	5s AT	5s AT	5s AT	5s AT	5s AT	5s AT	10s AMT

TABLE V-15—GEM INPUTS FOR BENCHMARKED MY 2027 VOCATIONAL VEHICLES—Continued

Class 2b–5			Class 6–7			Class 8		
Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
CI Engine <sup>a</sup>								
2027 MY 7L, 200 hp Engine			2027 MY 7L, 270 hp Engine			2027 MY 11L, 345 hp Engine		2027 MY 15L 455hp Engine
100% Idle Reduction = Stop-Start								
100% Steer Tires with CRR 6.4 kg/metric ton								
100% Drive Tires with CRR 7.0 kg/metric ton								
Weight Reduction 200 lb								

**Note:**<sup>a</sup> SI engines were not simulated in GEM.

Next we identified the best performing baseline vehicle in each weight class group (one for HHD, one for MHD and one for LHD) and normalized the baseline GEM results to the performance of that vehicle. A complete description of this normalization process is found in the draft RIA Chapter 2. We then applied our actual projected technology adoption rates, including hybrid powertrains and stop-start idle reduction, to normalized benchmarked vehicles in each of the nine subcategories. The proposed standards then were calculated by multiplying the normalized baseline vehicle GEM result by an average percent improvement for each weight class group. For example, the GEM results from applying the projected technology mix for MY 2021 MHD CI vocational vehicles were a 5 percent improvement in the Regional MHD subcategory, 7 percent improvement in the MHD Multipurpose subcategory, and 8 percent improvement in the MHD Urban subcategory. To achieve standards with equivalent stringency, we multiplied each normalized baseline vehicle's GEM performance by the numerical average of those simulated improvements, 6.6 percent. Without comparable stringency across the subcategories, manufacturers could have an incentive to select a subcategory strategically to have a less stringent standard, rather than to certify vehicles in the subcategory that best matches the vehicles' expected use patterns. By setting the standards at the same percent reduction from each weight class group of normalized benchmarked vehicles, we would expect to minimize any incentive for a manufacturer to certify a vocational vehicle in an inappropriate subcategory.

We request comment on using this approach to normalize the standards.

Commenters are encouraged to address both the approach in general and the specific technology assumed for the benchmark vehicles.

We are aware that in this approach, some of the projected technology packages would not provide a direct path to compliance for manufacturers, such as in the example above of the MHD Regional vehicle. Using the technologies adopted at projected rates, it would fall short of the standard by 1.5 percent. The agencies believe that the Phase 2 program has enough regulatory flexibility (averaging, banking, and trading provisions in particular) to enable such a vehicle to be certified.

In the package descriptions that follow, individual technology costs are not presented, rather these can be found in the draft RIA Chapter 2.9 and 2.12. Section V. C. (2) (d) includes the costs estimated for packages of technologies the agencies project would enable vocational vehicles to meet the proposed Phase 2 standards.

**(i) Transmission Packages**

The agencies project that 30 percent of vocational vehicles would have one or more of the transmission technologies identified above in this section applied by MY 2021, increasing to nearly 60 percent by MY 2024 and over 80 percent by MY 2027. Most of this increase is due to a projected increase in adoption of technologies that represent deep driveline integration. The agencies project an adoption rate of 15 percent in MY 2021 and 30 percent in MY 2024 for manufacturers using the powertrain test to be recognized for non-hardware upgrades such as gear efficiencies, shift strategies, and torque converter lockups, as well as other technologies that enable driveline optimization. Due to the relatively high efficiency gains available from driveline optimization for relatively low costs, the agencies are

projecting a 70 percent application rate of driveline optimization by MY 2027 across all subcategories. We do not have information about the extent to which integration may be deterred by barriers to information-sharing between component suppliers. Therefore we are projecting that major manufacturers would work to overcome these barriers, integrate and optimize their drivelines, and use the powertrain test on all eligible configurations, while smaller manufacturers may not adopt these technologies at all, or not to a degree that they would find value in this optional test procedure.

For the technology of adding two gears, we are predicating the proposed MY 2021 standard on a five percent adoption rate, except zero in the HHD Regional subcategory, which is modeled with a 10-speed transmission. This adoption rate is projected to essentially remain at this level throughout the program, with an increase to ten percent only for two subcategories (Regional LHD and MHD) in MY 2027. This is because the manufacturers most likely to develop 8-speed transmissions are those that are also developing transmissions for HD pickups and vans, and the GEM-certified vocational market share among those manufacturers is relatively small.

The HHD Regional subcategory is the only one where we assume a manual transmission in the baseline configuration. For these vehicles, the agencies project upgrades to electronic transmissions such as either AMT, DCT, or automatic, at collective adoption rates of 51 percent in MY 2021, 68 percent in MY 2024, and five percent in MY 2027. The decrease in MY 2027 reflects a projection that a greater number of deeply integrated HHD powertrains would be used by MY 2027 (one consequence being that fewer HHD

powertrains would be directly simulated in GEM in that year). The larger numbers in the phase-in years reflect powertrains that have been automated or electrified but not deeply integrated. The agencies have been careful to account for the cost of both electrifying and deeply integrating the MY 2027 powertrains. In draft RIA Chapter 11, the technology adoption rates for the HHD Regional subcategory presented in Table 11–42, Table 11–45, and Table 11–48 account for the assumption that a manual transmission cannot be deeply integrated, so there must also be an automation upgrade. These tables are inputs to the agencies' cost analysis, thus the costs of both upgrading and integrating HHD powertrains are included. The adoption rates of the upgraded but not integrated transmission architectures represent a projection of three percent of all vocational vehicles in MY 2021 and four percent in MY 2024. This is based on an estimate that seven percent of the vocational vehicles would be in the HHD Regional subcategory. For more information about the assumptions that were made about the populations of vehicles in different subcategories, see the agencies' inventory estimates in draft RIA Chapter 5.

In the eight subcategories in which automatic transmissions are the base technology, the agencies project that five percent would upgrade to a dual clutch transmission in MY 2021. This projection increases to 15 percent in MY 2024 and decreases in MY 2027 to ten percent for two subcategories (Regional LHD and MHD) and five percent for the remaining 6 subcategories. The low projected adoption rates of DCT reflect the fact that this is a relatively new technology for the heavy-duty sector, and it is likely that broader market acceptance would be achieved once fleets have gained experience with the technology. Similar to the pattern described for the HHD Regional subcategory, the decrease in MY 2027 reflects a projection of greater use of deeply integrated powertrains.

In setting the proposed standard stringency, we have projected that hybrids on vehicles certified in the Multipurpose subcategories would achieve on average 22 percent improvement, and those in the Urban subcategories would see a 25 percent improvement. We have also projected zero hybrid adoption rate by vehicles in the Regional subcategories, expecting that the benefit of hybrids for those vehicles would be too low to merit use of that type of technology. However, there is no fixed hybrid value assigned in GEM and the actual improvement

over the applicable test cycle would be determined by powertrain testing. By the full implementation year of MY 2027, the agencies are projecting an overall vocational vehicle adoption rate of ten percent hybrids, which we estimate would be 18 percent of vehicles certified in the Multi-Purpose and Urban subcategories. We are projecting a low adoption rate in the early years of the Phase 2 program, just four percent in these subcategories in MY 2021, and seven percent in MY 2024 for vehicles certified in the Multi-Purpose and Urban subcategories. Based on our assumptions about the populations of vehicles in different subcategories, these hybrid adoption rates are about two percent overall in MY 2021 and four percent overall in MY 2024.

Considering the combination of the above technologies and adoption rates, we project the CO<sub>2</sub> and fuel efficiency improvements for all transmission upgrades to be approximately seven percent on a fleet basis by MY 2027. One subcategory in which we are projecting a very large advanced transmission adoption rate is the HHD Regional subcategory, in which we are projecting 75 percent of the transmissions would be either automated or automatic (upgraded from a manual) with 70 percent of those also being deeply integrated by MY 2027. By comparison, the agencies are projecting that HHD day cab tractors would have 90 percent adoption of automated or automatic transmissions by MY 2027. Although we are not prepared to predict what fraction of these would be upgraded in the absence of Phase 2, the draft RIA Chapter 2.9 explains why the agencies are confident that durable transmissions will be widely available in the Phase 2 time frame to support manufacture of HHD vocational vehicles.

If the above technologies do not reach the expected level of market adoption, the vocational vehicle Phase 2 program has several other technology options that manufacturers could choose to meet the proposed standards.

#### (ii) Axle Packages

The agencies project that 75 percent of vocational vehicles in all subcategories would adopt advanced axle lubricant formulations in all implementation years of the Phase 2 program. Fuel efficient lubricant formulations are widespread across the heavy-duty market, though advanced synthetic formulations are currently less popular.<sup>314</sup> Axle lubricants with

<sup>314</sup> Based on conversations with axle suppliers.

improved viscosity and efficiency-enhancing performance are projected to be widely adopted by manufacturers in the time frame of Phase 2. Such formulations are commercially available and the agencies see no reason why they could not be feasible for most vehicles. Nonetheless, we have refrained from projecting full adoption of this technology. The agencies do not have specific information regarding reasons why axle manufacturers may specify a specific type of lubricant over another, and whether advanced lubricant formulations may not be recommended in all cases. The agencies request comment on information regarding any vocational vehicle applications for which use of advanced lubricants would not be feasible.

The agencies estimate that 45 percent of HHD Regional vocational vehicles would adopt either full time or part time 6x2 axle technology in MY 2021. This technology is most likely to be applied to Class 8 vocational vehicles (with 2 rear axles) that are designed for frequent highway trips. The agencies project a slightly higher adoption rate of 60 percent combined for both full and part time 6x2 axle technologies in MY 2024 and MY 2027. Based on our estimates of vehicle populations, this is about four percent of all vocational vehicles.

#### (iii) Tire Packages

The agencies estimate that the per-vehicle average level of rolling resistance from vocational vehicle tires could be reduced by 11 percent by full implementation of the Phase 2 program in MY 2027, based on the tire development achievements expected over the next decade. This is estimated by weighting the projected improvements of steer tires and drive tires using an assumed axle load distribution of 30 percent on the steer tires and 70 percent on the drive tires, as explained in the draft RIA Chapter 2.9. The projected adoption rates and expected improvements in CRR are presented in Table V–16. By applying the assumed axle load distribution, the average vehicle CRR improvements projected for the proposed MY 2021 standards would be four percent, which we project would achieve up to one percent reduction in fuel use and CO<sub>2</sub> emissions, depending on the vehicle subcategory. Using that same method, the agencies estimate the average vehicle CRR in MY 2024 would be seven percent, yielding reductions in fuel use and CO<sub>2</sub> emissions of between one and two percent, depending on the vehicle subcategory.

The agencies understand that the vocational vehicle segment has access to

a large variety of tires, including some that are designed for tractors, some that are designed for HD pickups and vans, and some with multiple use designations. In spite of the likely availability of LRR tires during the

Phase 2 program, the projected adoption rates are intended to be conservative. The agencies believe that these tire packages recognize the variety of tire purposes and performance levels in the vocational vehicle market, and maintain

choices for manufacturers to use the most efficient tires (*i.e.* those with least rolling resistance) only where it makes sense given these vehicles' differing purposes and applications.

TABLE V-16—PROJECTED LRR TIRE ADOPTION RATES

Tire position	Level of rolling resistance	MY 2021 adoption rate	MY 2024 adoption rate	MY 2027 adoption rate
Drive .....	Baseline CRR (7.7) .....	50	20	10
Steer .....	Baseline CRR (7.7) .....	20	10	0
Drive .....	5% Lower CRR (7.3) .....	50	50	25
Steer .....	10% Lower CRR (6.9) .....	80	30	20
Drive .....	10% Lower CRR (6.9) .....	0	30	50
Steer .....	15% Lower CRR (6.5) .....	0	60	30
Drive .....	15% Lower CRR (6.5) .....	0	0	15
Steer .....	20% Lower CRR (6.2) .....	0	0	50
Drive .....	Average Improvement in CRR .....	3%	6%	9%
Steer .....	Average Improvement in CRR .....	8%	12%	17%

For comparison purposes, the reader may note that these levels of tire CRR generally correspond with levels of tire CRR projected for tractors built for the Phase 1 standards. For example, the baseline level CRR for vocational tires is very similar to the baseline tractor steer tire CRR. Vocational vehicle tires with 10 percent better CRR have a similar CRR level as tractor tires of Drive Level 1. Vocational vehicle tires with 15 percent better CRR have a similar CRR level as tractor tires of Steer Level 1. Vocational vehicle tires with 20 percent better CRR have a similar CRR level as tractor tires of Drive Level 2, as described in Section III.D.2.

#### (iv) Idle Reduction Packages

In this proposal, we are projecting a progression of idle reduction technology development that begins with 70 percent adoption rate of neutral idle for the MY 2021 standards, which by MY 2027 is replaced by a 70 percent adoption rate of stop-start idle reduction technology. Although it is possible that a vehicle could have both neutral idle and stop-start, we are only considering emissions reductions for vehicles with one or the other of these technologies. Also, as the program phases in, we do not see a reduction in the projected adoption rate of neutral idle to be a concern in terms of stranded investment, because it is a very low cost technology that could be an enabler for stop-start systems in some cases.

We are not projecting any adoption of neutral idle for the HHD Regional subcategory, because any vehicle with a manual transmission must shift to neutral when stopped to avoid stalling the engine, so that vehicles in the HHD Regional subcategory would already essentially be idling in neutral and no

additional technology would be needed to achieve this. A similar case can be made for any vocational vehicle with an automated manual transmission, since these share inherently similar architectures with manuals. The agencies are not projecting an adoption rate of 85 percent neutral idle until MY 2024, because it may take some additional development time to apply this technology to high-torque automatic transmissions designed for the largest vocational vehicles. Based on stakeholder input, the designs needed to avoid an uncomfortable re-engagement bump when returning to drive from neutral may require some engineering development time as well as some work to enable two-way communication between engines and transmissions.

We are projecting a five percent adoption rate of stop-start in the six MHD and LHD subcategories for MY 2021 and zero for the HHD vehicles, because this technology is still developing for vocational vehicles and is most likely to be feasible in the early years of Phase 2 for vehicles with lower power demands and lower engine inertia. Stopping a heavy-duty engine is not challenging. The real challenge is designing a robust system that can deliver multiple smooth restarts daily without loss of function while the engine is off. Many current light-duty products offer this feature, and some heavy-duty manufacturers are exploring this.<sup>315</sup> The agencies are projecting an

<sup>315</sup> See Ford announcement December 2013, <https://media.ford.com/content/fordmedia/fna/us/en/news/2013/12/12/70-percent-of-ford-lineup-to-have-auto-start-stop-by-2017-fuel.html>. See also Allison-Cummins announcement July 2014, [http://www.oemoffhighway.com/press\\_release/12000208/allison-stop-start?utm](http://www.oemoffhighway.com/press_release/12000208/allison-stop-start?utm_source=OOH+Industry+News+eNL&utm_medium=email&utm_campaign=RCL140723006)

adoption rate of 15 percent stop-start across all subcategories in the intermediate year of MY 2024. The agencies are projecting this technology to have a relatively high adoption rate (70 percent as stated above) by MY 2027 because we see it being technically feasible on the majority of vocational vehicles, and especially effective on those with the most time at idle in their workday operation. Although we are not prepared to predict what fraction of vehicles would adopt stop-start in the absence of Phase 2, the draft RIA Chapter 2.9 explains why the agencies are confident that this technology, which is on the entry-level side of the hybrid and electrification spectrum, will be widely available in the Phase 2 time frame.

Based on these projected adoption rates and the effectiveness values described above in this section, we expect overall GHG and fuel consumption reductions from workday idle on vocational vehicles to be approximately three percent in MY 2027.

#### (v) Weight Reduction Packages

As described in the draft RIA Chapter 2.12, weight reduction is a relatively costly technology, at approximately \$3 to \$4 per pound for a 200-lb package. Even so, for vehicles in service classes where dense, heavy loads are frequently carried, weight reduction can translate directly to additional payload. The agencies project weight reduction would most likely be used for vocational vehicles in the refuse and construction service classes, as well as some regional delivery vehicles. The agencies are

predicating the proposed standards on an adoption rate of five to eight percent, depending on the subcategory, in MY 2027, with slightly lower adoption rates in MY 2021 and MY 2024.

For this technology package, NHTSA and EPA project manufacturers would use material substitution in the amount of 200 lbs. An example of how this weight could be reduced would be a complete set of aluminum wheels for a Class 8 vocational vehicle, or an aluminum transmission case plus high strength steel wheels, frame rails, and suspension brackets on a MHD or LHD vocational vehicle. The agencies have limited information about how popular the use of aluminum components is in the vocational vehicle sector. We request comments with information on whether any lightweight vocational vehicle components are in such widespread use that we should exclude them from the list of components for which a GEM improvement value would be available.

#### (c) GEM Inputs for Derivation of Proposed Vocational Vehicle Standards

To derive the stringency of the proposed vocational vehicle standards, the agencies developed a suite of fuel consumption maps for use with the GEM: One set of maps that represent engines meeting the proposed MY 2021 vocational diesel engine standards, a second set of maps representing engines

meeting the proposed MY 2024 vocational diesel engine standards, and a third set of maps representing engines meeting the proposed MY 2027 vocational diesel engine standards.<sup>316</sup> By incorporating the engine technology packages projected to be adopted to meet the proposed Phase 2 vocational CI engine standards, the agencies employed GEM engine models in deriving the stringency of the proposed Phase 2 CI-powered vocational vehicle standards. As noted above, because the agencies did not have enough information to develop a robust GEM-based gasoline engine fuel map, the stringency of the proposed SI-powered vocational vehicle standards is derived as an adjustment from the CI-powered vocational vehicle standards. See the draft RIA Chapter 2.9 for more details about this adjustment process.

Depending on the particular technology, either the effectiveness was assigned by the agencies using an accepted average value, or the GEM tool was used to assess the proposed technology effectiveness, as discussed above. The agencies derived a scenario vehicle for each subcategory using the adoption rate and assigned or modeled improvement values of transmission, axle, and idle reduction technologies. For example, the MY 2021 CRR values for each subcategory scenario case were derived as follows: For steer tires—20 percent times 7.7 plus 80 percent times

6.9 yields an average CRR of 7.1 kg/metric ton; and for drive tires—50 percent times 7.7 plus 50 percent times 7.3 yields an average CRR of 7.5 kg/metric ton. Similar calculations were done for weight reduction, transmission improvements, and axle improvements. The set of tire CRR, idle reduction, weight reduction, engine and transmission input parameters that was modeled in GEM in support of the proposed MY 2021 vocational vehicle standards is shown in Table V–17. The agencies derived the level of the proposed MY 2024 standards by using the tire, weight reduction, engine and transmission GEM inputs shown in Table V–18, below. The agencies derived the level of the proposed MY 2027 standards by using the tire, weight reduction, engine and transmission GEM inputs shown in Table V–19, below. As post-processing, the respective adoption rates and assigned improvement values of transmission, axle, and idle reduction technologies were calculated for each subcategory.

The agencies have not directly transferred the GEM results from these inputs as the proposed standards. Rather, the proposed standards are the result of the normalizing and benchmarking analysis described above. The proposed standards are presented in Table V–4 through Table V–9. Additional detail is provided in the RIA Chapter 2.9.

TABLE V–17—GEM INPUTS USED TO DERIVE PROPOSED MY 2021 VOCATIONAL VEHICLE STANDARDS

Class 2b–5			Class 6–7			Class 8		
Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
CI Engine <sup>a</sup>								
2021 MY 7L, 200 hp Engine 200 hp Engine			2021 MY 7L, 270 hp Engine			2021 MY 11L, 345 hp Engine		2021 MY 15L 455hp Engine
Transmission (improvement factor)								
0.023	0.021	0.008	0.023	0.021	0.009	0.023	0.022	0.022
Axle (improvement factor)								
0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.012
Stop-Start (adoption rate)								
5%	5%	5%	5%	5%	5%	0%	0%	0%
Neutral Idle (adoption rate)								
70%	70%	70%	70%	70%	70%	70%	70%	0%
Steer Tires (CRR kg/metric ton)								
7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1

<sup>316</sup> See Section II.D.2 of this preamble for the derivation of the engine standards.



TABLE V-17—GEM INPUTS USED TO DERIVE PROPOSED MY 2021 VOCATIONAL VEHICLE STANDARDS—Continued

Class 2b–5			Class 6–7			Class 8		
Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
Drive Tires (CRR kg/metric ton)								
7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5
Weight Reduction (lb)								
8	8	14	8	8	12	8	8	10

<sup>a</sup>SI engines were not simulated in GEM, rather a gas/diesel adjustment factor was applied to the results.

TABLE V-18—GEM INPUTS USED TO DERIVE PROPOSED MY 2024 VOCATIONAL VEHICLE STANDARDS

Class 2b–5			Class 6–7			Class 8		
Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
CI Engine <sup>a</sup>								
2024 MY 7L, 270 hp Engine			2024 MY 11L, 345 hp Engine			2024 MY 15L, 455hp Engine		2024 MY 15L 455hp Engine
Transmission (improvement factor)								
0.045	0.04	0.017	0.045	0.041	0.018	0.045	0.042	0.035
Axle (improvement factor)								
0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.014
Stop-Start (adoption rate)								
15%	15%	15%	15%	15%	15%	15%	15%	15%
Neutral Idle (adoption rate)								
85%	85%	85%	85%	85%	85%	85%	85%	0%
Steer Tires (CRR kg/metric ton)								
6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8
Drive Tires (CRR kg/metric ton)								
7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3
Weight Reduction (lb)								
8	8	14	8	8	12	8	8	10

<sup>a</sup> SI engines were not simulated in GEM, rather a gas/diesel adjustment factor was applied to the results.

TABLE V-19—GEM INPUTS USED TO DERIVE PROPOSED MY 2027 VOCATIONAL VEHICLE STANDARDS

[illegible]

TABLE V–19—GEM INPUTS USED TO DERIVE PROPOSED MY 2027 VOCATIONAL VEHICLE STANDARDS—Continued

Class 2b–5			Class 6–7			Class 8		
Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
<b>Stop-Start (adoption rate)</b>								
75%	70%	70%	75%	70%	70%	70%	70%	70%
<b>Neutral Idle (adoption rate)</b>								
25%	30%	30%	25%	30%	30%	30%	30%	0%
<b>Steer Tires (CRR kg/metric ton)</b>								
6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4
<b>Drive Tires (CRR kg/metric ton)</b>								
7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0
<b>Weight Reduction (lb)</b>								
10	10	16	10	10	14	10	10	12

**Note:**

<sup>a</sup> SI engines were not simulated in GEM, rather a gas/diesel adjustment factor was applied to the results.

**(d) Technology Package Costs**

The agencies have estimated the costs of the technologies that could be used to comply with the proposed standards. The estimated costs are shown in Table V–20 for MY2021, in Table V–21 for MY2024, and Table V–22 for MY 2027. Fleet average costs are shown for light, medium and heavy HD vocational vehicles in each duty-cycle-based subcategory—Urban, Multi-Purpose, and Regional. As shown in Table V–20, in MY 2021 these range from approximately \$600 for MHD and LHD Regional vehicles, up to \$3,400 for HHD Regional vehicles. Those two lower-cost packages reflect zero hybrids, and the

higher-cost package reflects significant adoption of automated transmissions. In the draft RIA Chapter 2.13.2, the agencies present vocational vehicle technology package costs differentiated by MOVES vehicle type. For example, intercity buses are estimated to have an average package cost of \$2,900 and gasoline motor homes are estimated to have an average package cost of \$450 in MY 2021. These costs do not indicate the per-vehicle cost that may be incurred for any individual technology. For more specific information about the agencies' estimates of per-vehicle costs, please see the draft RIA Chapter 2.12. For example, Chapter 2.12.7 describes why a complex technology such as

hybridization is estimated to range between \$15,000 and \$40,000 per vehicle for vocational vehicles in MY 2021. The engine costs listed represent the cost of an average package of diesel engine technologies as set out in Section II. Individual technology adoption rates for engine packages are described in Section II.D. The details behind all these costs are presented in draft RIA Chapter 2.12, including the markups and learning effects applied and how the costs shown here are weighted to generate an overall cost for the vocational segment. We welcome comments on our technology cost assessments.

TABLE V-20—VOCATIONAL VEHICLE TECHNOLOGY INCREMENTAL COSTS FOR THE PROPOSAL IN THE 2021 MODEL YEAR<sup>A</sup> B  
[2012\$]

	Light HD			Medium HD			Heavy HD		
	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
Engine <sup>c</sup> .....	\$293	\$293	\$293	\$270	\$270	\$270	\$270	\$270	\$270
Tires .....	7	7	7	7	7	7	7	7	7
Transmission .....	81	81	81	81	81	81	81	81	2,852
Axle related .....	99	99	99	99	99	99	148	148	219
Weight Reduction .....	27	27	48	27	27	41	27	27	34
Idle reduction .....	49	49	49	51	51	51	6	6	0
Electrification & hybridization .....	547	547	0	861	861	0	1,437	1,437	0
Air Conditioning <sup>d</sup> .....	22	22	22	22	22	22	22	22	22
Total .....	1,125	1,125	598	1,418	1,418	571	1,998	1,998	3,404

**Notes:**

<sup>a</sup>Costs shown are for the 2021 model year and are incremental to the costs of a vehicle meeting the Phase 1 standards. These costs include indirect costs via markups along with learning impacts. For a description of the markups and learning impacts considered in this analysis and how it impacts technology costs for other years, refer to Chapter 2 of the draft RIA (see draft RIA 2.12).

<sup>b</sup>Note that values in this table include adoption rates. Therefore, the technology costs shown reflect the average cost expected for each of the indicated vehicle classes. To see the actual estimated technology costs exclusive of adoption rates, refer to Chapter 2 of the draft RIA (see RIA 2.9 in particular).

<sup>c</sup>Engine costs are for a light HD, medium HD or heavy HD diesel engine. We are projecting no additional costs beyond Phase 1 for gasoline vocational engines.

<sup>d</sup>EPA's air conditioning standards are presented in Section V.C above.

The estimated fleet average vocational vehicle package costs are shown in Table V-21 for MY 2024. As shown, these range from approximately \$800 for MHD and LHD Regional vehicles, up to \$4,800 for HHD Regional vehicles. The increased costs above the MY 2021

values reflect increased adoption rates of individual technologies, while the individual technology costs are generally expected to remain the same or decrease, as explained in the draft RIA Chapter 2.12. For example, Chapter 2.12.7 presents MY 2024 hybridization

costs that range from \$13,000 to \$33,000 per vehicle for vocational vehicles. The engine costs listed represent the average costs associated with the proposed MY 2024 vocational diesel engine standard described in Section II.D.

TABLE V-21—VOCATIONAL VEHICLE TECHNOLOGY INCREMENTAL COSTS FOR THE PROPOSAL IN THE 2024 MODEL YEAR<sup>a b</sup>  
[2012\$]

	Light HD			Medium HD			Heavy HD		
	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
Engine <sup>c</sup> .....	\$437	\$437	\$437	\$405	\$405	\$405	\$405	\$405	\$405
Tires .....	17	17	17	17	17	17	23	23	23
Transmission .....	123	123	123	123	123	123	123	123	3,915
Axle related .....	90	90	90	90	90	90	136	136	224
Weight Reduction .....	24	24	43	24	24	37	24	24	30
Idle reduction .....	119	119	119	125	125	125	224	224	217
Electrification & hybridization .....	906	906	0	1,423	1,423	0	2,377	2,377	0
Air Conditioning <sup>d</sup> .....	20	20	20	20	20	20	20	20	20
Total .....	1,737	1,737	849	2,228	2,228	817	3,332	3,332	4,834

**Notes:**

<sup>a</sup>Costs shown are for the 2024 model year and are incremental to the costs of a vehicle meeting the Phase 1 standards. These costs include indirect costs via markups along with learning impacts. For a description of the markups and learning impacts considered in this analysis and how it impacts technology costs for other years, refer to Chapter 2 of the draft RIA (see draft RIA 2.12).

<sup>b</sup>Note that values in this table include adoption rates. Therefore, the technology costs shown reflect the average cost expected for each of the indicated vehicle classes. To see the actual estimated technology costs exclusive of adoption rates, refer to Chapter 2 of the draft RIA (see RIA 2.9 in particular).

<sup>c</sup>Engine costs are for a light HD, medium HD or heavy HD diesel engine. We are projecting no additional costs beyond Phase 1 for gasoline vocational engines.

<sup>d</sup>EPA's air conditioning standards are presented in Section V.C above.

The estimated fleet average vocational vehicle package costs are shown in Table V-22 for MY 2027. As shown, these range from approximately \$1,400 for MHD and LHD Regional vehicles, up to \$7,400 for HHD Urban and Multipurpose vehicles. These two subcategories are projected to have the higher-cost packages in MY 2027 due to an estimated 18 percent adoption of HHD hybrids, which are estimated to cost \$31,000 per vehicle in MY 2027, as shown in Chapter 2.12.7 of the draft RIA. These per-vehicle technology package costs were averaged using our projections of vehicle populations in the nine regulatory subcategories and do not correspond to the MOVES vehicle types. The engine costs shown represent the average costs associated with the

proposed MY 2027 vocational diesel engine standard described in Section II.D. For gasoline vocational vehicles, the agencies are projecting adoption of Level 2 engine friction reduction with an estimated \$68 added to the average SI vocational vehicle package cost in MY 2027, which represents about 56 percent of those vehicles upgrading beyond Level 1 engine friction reduction. Further details on how these SI vocational vehicle costs were estimated are provided in the draft RIA Chapter 2.9.

Purchase prices of vocational vehicles can range from \$60,000 for a stake-bed landscape truck to over \$400,000 for some transit buses. The costs of the vocational vehicle standards can be put into perspective by considering package

costs estimated using MOVES vehicle types along with typical prices for those vehicles. For example, a package cost of \$4,000 on a \$60,000 short haul straight truck would represent an incremental increase of about six percent of the vehicle purchase price. Similarly, a package cost of \$7,000 on a \$200,000 refuse truck would represent an incremental increase of less than four percent of the vehicle purchase price. The vocational vehicle industry characterization report in the docket includes additional examples of vehicle prices for a variety of vocational applications.<sup>317</sup>

---

<sup>317</sup> See industry characterization, Note 260, above.

TABLE V-22—VOCATIONAL VEHICLE TECHNOLOGY INCREMENTAL COSTS FOR THE PROPOSAL IN THE 2027 MODEL YEAR<sup>a b</sup>  
[2012\$]

	Light HD			Medium HD			Heavy HD		
	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
Engine <sup>c</sup> .....	\$471	\$471	\$471	\$437	\$437	\$437	\$437	\$437	\$437
Tires .....	20	20	20	20	20	20	29	29	29
Transmission .....	244	244	267	244	244	267	244	244	2,986
Axle related .....	86	86	86	86	86	86	129	129	215
Weight Reduction .....	29	29	46	29	29	40	29	29	35
Idle reduction .....	498	499	499	526	526	526	964	964	962
Electrification & hybridization .....	2,122	2,122	0	3,336	3,336	0	5,571	5,571	0
Air Conditioning <sup>d</sup> .....	19	19	19	19	19	19	19	19	19
Total .....	3,489	3,490	1,407	4,696	4,696	1,395	7,422	7,422	4,682

**Notes:**

<sup>a</sup> Costs shown are for the 2024 model year and are incremental to the costs of a vehicle meeting the Phase 1 standards. These costs include indirect costs via markups along with learning impacts. For a description of the markups and learning impacts considered in this analysis and how it impacts technology costs for other years, refer to Chapter 2 of the draft RIA (see draft RIA 2.12).

<sup>b</sup> Note that values in this table include adoption rates. Therefore, the technology costs shown reflect the average cost expected for each of the indicated vehicle classes. To see the actual estimated technology costs exclusive of adoption rates, refer to Chapter 2 of the draft RIA (see RIA 2.9 in particular).

<sup>c</sup> Engine costs are for a light HD, medium HD or heavy HD diesel engine. We are projecting no additional costs beyond Phase 1 for gasoline vocational engines.

<sup>d</sup> EPA's air conditioning standards are presented in Section V.C above.

(3) Consistency of the Proposed Vocational Vehicle Standards With the Agencies' Legal Authority

NHTSA and EPA project the proposed standards to be achievable within known design cycles, and we believe these standards, although technology-forcing, would allow many different paths to compliance in addition to the example outlined in this section. The proposed standards are predicated on manufacturers implementing technologies that we expect will be available in the time frame of these proposed rules, although in some instances these technologies are still under development or not widely deployed in the current vocational vehicle fleet. Under the proposal, manufacturers would need to apply a range of technologies to their vocational chassis, which the agencies believe would be consistent with the agencies' respective statutory authorities. We are projecting that most vehicles could adopt certain of the technologies. For example, we project a 70 to 75 percent application rate for stop-start idle reduction and advanced axle lubrication. However, for other technologies, such as strong hybrids and weight reduction, we are projecting adoption rates of ten percent or less overall, with individual subcategories having adoption rates greater or less than this. The proposed standards offer manufacturers the flexibility to apply the technologies that make sense for their business and customer needs.

As discussed above, average per-vehicle costs associated with the proposed 2027 MY standards are projected to be generally less than six percent of the overall price of a new vehicle. The cost-effectiveness of these proposed vocational vehicle standards in dollars per ton is similar to the cost effectiveness estimated for light-duty trucks in the 2017–2025 light duty greenhouse gas standards, which the agencies have found to be highly cost effective.<sup>318</sup> In addition, the vocational vehicle standards are clearly effective

from a net benefits perspective (see draft RIA Chapter 11.2). Therefore, the agencies regard the cost of the proposed standards as reasonable.

The agencies note that while the projected costs are significantly greater than the costs projected for Phase 1, we still consider these costs to be reasonable, especially given that the first vehicle owner may see the technologies pay for themselves in many cases. As discussed above, the usual period of ownership for a vocational vehicle reflects a lengthy trade cycle that may often exceed seven years. For most vehicle types evaluated, the cost of these technologies, if passed on fully to customers, would be recovered within five years or less due to the associated fuel savings, as shown in the payback analysis included in Section IX and in the draft RIA Chapter 7.1. Specifically, in Table 7–30 of the draft RIA Chapter 7.1.3, a summary is presented with estimated payback periods for each of the MOVES vocational vehicle types, using the annual vehicle miles traveled from the MOVES model for each vehicle type. As shown, the vocational vehicle type with the shortest payback would be intercity buses (less than one year), while most other vehicles (with the exception of school buses and motor homes) are projected to see paybacks in the fifth year or sooner.

The agencies note further that although the proposal is technology-forcing (especially with respect to driveline improvements) and the estimated costs for each subcategory vary considerably (by a factor of five in some cases), these costs represent only one of many possible pathways to compliance for manufacturers. Manufacturers retain leeway to develop alternative compliance paths, increasing the likelihood of the standards' successful implementation. Based on available information, the agencies believe the proposed standards are technically feasible within the lead time provided, are cost effective while

accounting for the fuel savings (see draft RIA Chapter 7.1.4), and have no apparent adverse collateral potential impacts (*e.g.*, there are no projected negative impacts on safety or vehicle utility).

The proposed standards thus appear to represent a reasonable choice under Section 202(a) of the CAA and the maximum feasible under NHTSA's EISA authority at 49 U.S.C. 32902(k)(2). The agencies believe that the proposed standards are consistent with their respective authorities. Based on the information currently before the agencies, we believe that the preferred alternative would be maximum feasible and reasonable for the vocational segment with a progression of standards reaching full implementation in MY 2027.

Nevertheless, as discussed in Section I. A. (1) and in Section X (Alternatives), the agencies seek comment on the feasibility of Alternative 4, which the agencies may determine is maximum feasible and reasonable depending on comments and information received during the comment period. This alternative is discussed in detail below because it may be possible for manufacturers to accelerate product development cycles enough to reach the required levels by the 2024 model year. Thus, the agencies may conclude in the final rules that Alternative 4, or some elements of this alternative, would be maximum feasible and appropriate under CAA section 202 (a)(1) and (2), depending on information and comments received. The agencies seek comments to assist us in making that determination.

#### *D. Alternative Vocational Vehicle Standards Considered*

The agencies have analyzed vocational vehicle standards other than the proposed standards. These alternatives, listed in Table III–22, are described in detail in Section X of this preamble and the draft RIA Chapter 11.

TABLE V–23—SUMMARY OF ALTERNATIVES CONSIDERED FOR THE PROPOSED RULEMAKING

Alternative 1 .....	No action alternative
Alternative 2 .....	Less stringent than the proposed alternative, applying off-the-shelf technologies
Alternative 3 (Proposed Alternative) .....	Proposed alternative fully phased-in by MY 2027
Alternative 4 .....	Same stringency as proposed alternative, except phasing in faster, by MY 2024
Alternative 5 .....	More stringent alternative, based on higher adoption rates of advanced technologies

NHTSA and EPA are considering an Alternative 4 that achieves the same

level of stringency as the preferred alternative, except it would provide less

lead time, reaching its most stringent level three years earlier than the

<sup>318</sup> See Chapter 5.3 of the final RIA for the MY 2017–2025 Light-Duty GHG Rule, available at

<http://www.epa.gov/otaq/climate/documents/420r12016.pdf>.



preferred alternative, that is in MY 2024. The agencies project that the same selection of technology options would be available to manufacturers regardless of what alternative is chosen. The preferred alternative would allow greater lead time to manufacturers to select and develop technologies for their vehicles.

The agencies have outstanding questions regarding relative risks and benefits of Alternative 4 due to the time frame envisioned by that alternative. If the agencies receive relevant information supporting the feasibility of Alternative 4, the agencies may consider establishing vocational vehicle standards that provide more overall reductions than what we are proposing if we deem them to be maximum feasible and reasonable for NHTSA and EPA, respectively. See the draft RIA Chapter 11.2.2 for a summary of costs and benefits that compares the proposed Phase 2 vocational vehicle program with the costs and benefits of other vocational vehicle alternatives considered.

In the paragraphs that follow, the agencies present the derivation of the Alternative 4 vocational vehicle standards. For currently developing technologies where we project an adoption rate that could present potential risks or challenges, we seek comment on the cost and effectiveness of such technology. Further, the agencies seek comment on the potential for adoption of developing technologies into the vocational vehicle fleet, as well as the extent to which the more accelerated alternative vocational vehicle standards may depend on such technology.

#### (1) Adoption Rates for Derivation of Alternative 4 Vocational Vehicle Standards

In developing the Alternative 4 standards, the agencies are projecting a set of technology packages in MY 2024 that is identical to those projected for the final phase-in year of the preferred alternative. Because these are the same for each subcategory, the GEM inputs modeled to derive the level of the MY 2024 Alternative 4 standards can be found in Table V–19, which presents the GEM inputs used to derive the level of the MY 2027 proposed standards. In the package descriptions below, the

agencies outline technology-specific adoption rates in MY 2021 for Alternative 4 and offer insights on what market conditions could enable reaching adoption rates that would achieve the full implementation levels of stringency with less lead time.

For transmissions including hybrids, the agencies project for Alternative 4 that 50 percent of vocational vehicles would have one or more of the transmission technologies identified above in this section applied by MY 2021. This includes 25 percent deeply integrated conventional transmissions that would be recognized over the powertrain test, 10 percent DCT, 11 percent adding two gears (except zero for HHD Regional), and nine percent hybrids for vehicles certified in the Multi-Purpose and Urban subcategories, which we estimate would be five percent overall. In this alternative, the agencies project 21 percent of the vocational vehicles with manual transmissions in the HHD Regional subcategory would upgrade to either an AMT, DCT, or automatic transmission. The increased projection of driveline integration would mean that more manufacturers would need to overcome data-sharing barriers. In this alternative, we project that manufacturers would need to conduct additional research and development to achieve overall application of five percent hybrids. In the draft RIA Chapter 7.1, the agencies have estimated costs for this additional accelerated research. Comments are requested on the expected costs to accelerate hybrid development to meet the projected adoption rates of this alternative.

For advanced axle lubricants, the agencies are projecting the same 75 percent adoption rate in MY 2021 as in the proposed program. For part time or full time 6x2 axles, the agencies project the HHD Regional vocational vehicles could apply this at the 60 percent adoption rate in MY 2021, where this level wouldn't be reached until MY 2024 in the proposed program. One action that could enable this to be achieved is if information on the reliability of these systems were to be disseminated to more fleet owners by trustworthy sources.

For lower rolling resistance tires in this alternative, the agencies project the same adoption rates of LRR tires as in

the proposed program for MY 2021, because we don't expect tire suppliers would be able to make greater improvements for the models that are fitted on vocational vehicles in that time frame. The tire research that is being conducted currently is focused on models for tractors and trailers, and we project further improved LRR tires would not be commercially available for vocational vehicles in the early implementation years of Phase 2.

For the adoption rate of LRR tires in MY 2024 to reach the level projected for MY 2027 in the proposed program, tire suppliers could promote their most efficient products to vocational vehicle manufacturers to achieve equivalent improvements with less lead time. Depending on how tire manufacturers focus their research and product development, it is possible that more of the LRR tire advancements being applied for tractors and trailers could be applied to vocational vehicles. To see the specific projected adoption rates of different levels of LRR tires for Alternative 4, see columns three and five of Table V–16 above.

For workday idle technologies, the agencies project an adoption rate of 12 percent stop-start in the six MHD and LHD subcategories for MY 2021 and zero for the HHD vehicles, on the expectation that manufacturers would have fewer challenges in the short term in bringing this technology to market for vehicles with lower power demands and lower engine inertia. In this alternative, the agencies project the overall workday idle adoption rate would approach 100 percent, such that any vehicle without stop-start (except HHD Regional) would apply neutral idle in MY 2021. These adoption rates consider a more aggressive investment by manufacturers in developing these technologies. Estimates of research and development costs for this alternative are presented in the draft RIA Chapter 7.1.

For weight reduction, in this alternative, the agencies project the same adoption rates of a 200-lb lightweighting package as in the proposal for each subcategory in MY 2021, which is four to seven percent. Table V–24 shows the GEM inputs used to derive the level of the Alternative 4 MY 2021 standards.

TABLE V—24—GEM INPUTS USED TO DERIVE ALTERNATIVE 4 MY 2021 VOCATIONAL VEHICLE STANDARDS

Class 2b–5			Class 6–7			Class 8		
Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
Alternative 4 CI Engine <sup>a</sup>								
2021 MY 7L, 200 hp Engine			2021 MY 7L, 270 hp Engine			2021 MY 11L, 345 hp Engine		2021 MY 15L 455hp Engine
Transmission (improvement factor)								
0.045 .....	0.04	0.014	0.045	0.041	0.015	0.045	0.041	0.018
Axle (improvement factor)								
0.004 .....	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.015
Stop-Start (adoption rate)								
12% .....	12%	12%	12%	12%	12%	0%	0%	0%
Neutral Idle (adoption rate)								
88% .....	88%	88%	88%	88%	88%	90%	90%	0%
Steer Tires (CRR kg/metric ton)								
7.1 .....	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1
Drive Tires (CRR kg/metric ton)								
7.5 .....	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5
Weight Reduction (lb)								
8 .....	8	14	8	8	12	8	8	10

**Note:**

<sup>a</sup>SI engines were not simulated in GEM, rather a gas/diesel adjustment factor was applied to the results.

## (2) Possible Alternative 4 Standards

Because the MY 2024 Alternative 4 standards are the same as the proposed standards for MY 2027 for each subcategory, these numerical standards

can be found in Table V–8 and Table V–9, which present EPA’s and NHTSA’s proposed MY 2027 standards, respectively. Table V–25 and Table V–26 present the Alternative 4 vocational vehicle standards for the initial year of

MY 2021. These represent incremental improvements over the MY 2017 baseline of six to seven percent for SI-powered vocational vehicles and nine percent for CI-powered vocational vehicles.

TABLE V–25—ALTERNATIVE 4 EPA CO<sub>2</sub> STANDARDS FOR MY2021 CLASS 2<sup>b</sup>–8 VOCATIONAL VEHICLES

Duty cycle	Light heavy-duty Class 2b–5	Medium heavy-duty Class 6–7	Heavy heavy-duty Class 8
<b>Alternative EPA Standard for Vehicle with CI Engine Effective MY2021 (gram CO<sub>2</sub>/ton-mile)</b>			
Urban .....	288	183	193
Multi-Purpose .....	297	185	196
Regional .....	309	181	185
<b>Alternative EPA Standard for Vehicle with SI Engine Effective MY2021 (gram CO<sub>2</sub>/ton-mile)</b>			
Urban .....	313	199	210
Multi-Purpose .....	323	201	212
Regional .....	336	197	201

TABLE V-26—ALTERNATIVE 4 NHTSA FUEL CONSUMPTION STANDARDS FOR MY2021 CLASS 2<sup>b</sup>–8 VOCATIONAL VEHICLES

Duty cycle	Light heavy-duty Class 2b–5	Medium heavy-duty Class 6–7	Heavy heavy-duty Class 8
<b>Alternative NHTSA Standard for Vehicle with CI Engine Effective MY 2021 (Fuel Consumption gallon per 1,000 ton-mile)</b>			
Urban .....	28.2908	17.9764	18.9587
Multi-Purpose .....	29.1749	18.1729	19.2534
Regional .....	30.3536	17.7800	18.1729
<b>Alternative NHTSA Standard for Vehicle with SI Engine Effective MY 2021 (Fuel Consumption gallon per 1,000 ton-mile)</b>			
Urban .....	35.2200	22.3923	23.6300
Multi-Purpose .....	36.3452	22.6173	23.8551
Regional .....	37.8080	22.1672	22.6173

## (3) Costs Associated With Alternative 4 Standards

The agencies have estimated the costs of the technologies expected to be used to comply with the Alternative 4 standards, as shown in Table V-27 for MY2021. Fleet average costs are shown for light, medium and heavy HD vocational vehicles in each duty-cycle-based subcategory—Urban, Multi-Purpose, and Regional. As shown in Table V-27, in MY 2021 these range

from approximately \$800 for MHD and LHD Regional vehicles, to \$4,300 for HHD Urban and Multipurpose vehicles. Those two subcategories are projected to have the higher-cost packages in MY 2021 due to an estimated 9 percent adoption of HHD hybrids, which are estimated to cost \$40,000 per vehicle in MY 2021, as shown in Chapter 2.12.7 of the draft RIA. For more specific information about the agencies' estimates of per-vehicle costs, please see

the draft RIA Chapter 2.12. The engine costs listed represent the cost of an average package of diesel engine technologies with Alternative 4 adoption rates described in Section II.D.2(e). The details behind all these costs are presented in draft RIA Chapter 2.12, including the markups and learning effects applied and how the costs shown here are weighted to generate an overall cost for the vocational segment.

TABLE V-27—VOCATIONAL VEHICLE TECHNOLOGY INCREMENTAL COSTS FOR ALTERNATIVE 4 STANDARDS IN THE 2021 MODEL YEAR<sup>a b</sup>  
(2012\$)

	Light HD			Medium HD			Heavy HD		
	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
Engine <sup>c</sup> .....	\$372	\$372	\$372	\$345	\$345	\$345	\$345	\$345	\$345
Tires .....	7	7	7	7	7	7	7	7	7
Transmission .....	148	148	148	148	148	148	148	148	2,042
Axle related .....	99	99	99	99	99	99	148	148	243
Weight Reduction .....	27	27	48	27	27	41	27	27	34
Idle reduction .....	110	110	110	116	116	116	8	8	0
Electrification & hybridization .....	1,384	1,384	0	2,175	2,175	0	3,633	3,633	0
Air Conditioning <sup>d</sup> .....	22	22	22	22	22	22	22	22	22
<b>Total .....</b>	<b>2,169</b>	<b>2,169</b>	<b>805</b>	<b>2,938</b>	<b>2,938</b>	<b>777</b>	<b>4,337</b>	<b>4,337</b>	<b>2,693</b>

**Notes:**

<sup>a</sup> Costs shown are for the 2021 model year and are incremental to the costs of a vehicle meeting the Phase 1 standards. These costs include indirect costs via markups along with learning impacts. For a description of the markups and learning impacts considered in this analysis and how it impacts technology costs for other years, refer to Chapter 2 of the draft RIA (see draft RIA 2.12).

<sup>b</sup> Note that values in this table include adoption rates. Therefore, the technology costs shown reflect the average cost expected for each of the indicated vehicle classes. To see the actual estimated technology costs exclusive of adoption rates, refer to Chapter 2 of the draft RIA (see RIA 2.9 in particular).

<sup>c</sup> Engine costs are for a light HD, medium HD or heavy HD diesel engine. We are projecting no additional costs beyond Phase 1 for gasoline vocational engines.

<sup>d</sup> EPA's air conditioning standards are presented in Section V.C above.

The estimated costs of the technologies expected to be used to comply with the Alternative 4 standards for MY2024 are shown in Table V-28. As shown, these range from approximately \$1,500 for MHD and LHD Regional vehicles to \$7,900 for HHD Urban and Multipurpose vehicles. These two subcategories are projected to

have the higher-cost packages in MY 2024 due to an estimated 18 percent adoption of HHD hybrids, which are estimated to cost \$33,000 per vehicle in MY 2024, as shown in Chapter 2.12.7 of the draft RIA. The engine costs listed represent the cost of an average package of diesel engine technologies with Alternative 4 adoption rates described

in Section II.D.2(e). For gasoline vocational vehicles, the agencies are projecting adoption of Level 2 engine friction reduction with an estimated \$74 added to the average SI vocational vehicle package cost in MY 2024, which represents about 56 percent of those vehicles upgrading beyond Level 1 engine friction reduction. Further

details on how these SI vocational vehicle costs were estimated are provided in the draft RIA Chapter 2.9.

**TABLE V–28—VOCATIONAL VEHICLE TECHNOLOGY INCREMENTAL COSTS FOR ALTERNATIVE 4 STANDARDS IN THE 2024 MODEL YEAR <sup>a</sup>**  
(2012\$)

	Light HD			Medium HD			Heavy HD		
	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional	Urban	Multi-purpose	Regional
Engine <sup>c</sup> .....	\$493	\$493	\$493	\$457	\$457	\$457	\$457	\$457	\$457
Tires .....	26	26	26	26	26	26	40	40	40
Transmission .....	256	256	280	256	256	280	256	256	3,123
Axle related .....	90	90	90	90	90	90	136	136	224
Weight Reduction .....	30	30	49	30	30	43	30	30	37
Idle reduction .....	561	524	524	592	553	553	1,014	1,014	1,011
Electrification & hybridization .....	2,264	2,264	0	3,559	3,559	0	5,943	5,943	0
Air Conditioning <sup>d</sup> .....	20	20	20	20	20	20	20	20	20
<b>Total</b> .....	<b>3,741</b>	<b>3,704</b>	<b>1,482</b>	<b>5,030</b>	<b>4,992</b>	<b>1,469</b>	<b>7,895</b>	<b>7,895</b>	<b>4,912</b>

**Notes:**

<sup>a</sup> Costs shown are for the 2024 model year and are incremental to the costs of a vehicle meeting the Phase 1 standards. These costs include indirect costs via markups along with learning impacts. For a description of the markups and learning impacts considered in this analysis and how it impacts technology costs for other years, refer to Chapter 2 of the draft RIA (see draft RIA 2.12).

<sup>b</sup> Note that values in this table include adoption rates. Therefore, the technology costs shown reflect the average cost expected for each of the indicated vehicle classes. To see the actual estimated technology costs exclusive of adoption rates, refer to Chapter 2 of the draft RIA (see RIA 2.9 in particular).

<sup>c</sup> Engine costs shown are for a light HD, medium HD or heavy HD diesel engine. For gasoline-powered vocational vehicles we are projecting \$74 of additional engine-based costs beyond Phase 1.

<sup>d</sup> EPA's air conditioning standards are presented in Section V.C above.

### E. Compliance Provisions for Vocational Vehicles

We welcome comment on all aspects of the compliance program, including those where we would adopt a provision without change in Phase 2.

#### (1) Application and Certification Process

The agencies propose to continue to use GEM to determine compliance with the proposed vehicle fuel efficiency and CO<sub>2</sub> standards. Because the agencies are proposing to modify GEM to recognize inputs in addition to those recognized under Phase 1, there is a consequent proposed requirement that manufacturers or component suppliers conduct component testing to generate those input values. See Section II for details of engine testing and GEM inputs for engines.

As described above in Section I, the agencies propose to continue the Phase 1 compliance process in terms of the manufacturer requirements prior to the effective model year, during the model year, and after the model year. The information that would be required to be submitted by manufacturers is set forth in 40 CFR 1037.205, 49 CFR 537.6, and 49 CFR 537.7. EPA would continue to issue certificates upon approval based on information submitted through the VERIFY database (see 40 CFR 1037.255). End of year reports would continue to include the GEM results for all of the

configurations built, along with credit/deficit balances, if applicable (see 40 CFR 1037.250 and 1037.730).

#### (a) GEM Inputs

In Phase 1, there were two inputs to GEM for vocational vehicles:

- Steer tire coefficient of rolling resistance, and
- Drive tire coefficient of rolling resistance

As discussed above in Section II and III.D, there are several additional inputs that are proposed for Phase 2. In addition to the steer and drive tire CRR, the proposed inputs include the following:

- Engine fuel map,
- Engine full-load torque curve,
- Engine motoring curve,
- Transmission type,
- Transmission gear ratios,
- Drive axle ratio,
- Loaded tire radius for drive and steer tires,
- Idle Reduction,
- Weight Reduction, and
- Other pre-defined off-cycle technologies.

#### (i) Driveline Inputs

As with tractors, for each engine family, an engine fuel map, full load torque curve, and motoring curve would be generated by engine manufacturers as inputs to GEM. The test procedures for the torque and motoring curves are found in proposed 40 CFR part 1065.

Section II.D.1.b describes these proposed procedures as well as the proposed new procedure for generating the engine fuel map. Also similar to tractors, transmission specifications would be input to GEM. Any number of gears could be entered with a numerical ratio for each, and transmission type would be selectable as either a Manual, Automated Manual, Automatic, or Dual Clutch transmission.

As part of the driveline information needed to run GEM, drive axle ratio would be a user input. If a configuration has a two-speed axle, the agencies propose that a manufacturer may enter the ratio that is expected to be engaged most often. We request comment on whether the agencies should allow this choice. Two-speed axles are typically specified for heavy-haul vocational vehicles, where the higher numerical ratio axle would be engaged during transient driving conditions and to deliver performance needed on work sites, while the lower numerical ratio axle would be engaged during highway driving. The agencies request comment on whether we should require GEM to be run twice, once with each axle ratio, where the output over the highway cycles would be used from the run with the lower axle ratio, and the output over the transient cycle would be used from the run with the higher axle ratio.

Tire size would be a new input to GEM that is necessary for the model to simulate the performance of the vehicle.

The draft RIA Chapter 3 includes a description of how to measure tire size. For each model and nominal size of a tire, there are numerous possible sizes that could be measured, depending on whether the tire is new or “grown,” meaning whether it has been broken in for at least 200 miles. Size could also vary based on load and inflation levels, air temperature, and tread depth. The agencies request comment on aspects of measuring and reporting tire size that could be specified by rule, to avoid any unnecessary compliance burden of the Phase 2 program.

#### (ii) Idle Reduction Inputs

Based on user inputs derived from engine testing described in Section II and draft RIA Chapter 3, GEM would calculate CO<sub>2</sub> emissions and fuel consumption at both zero torque (neutral idle) and with torque set to Curb-Idle Transmission Torque for automatic transmissions in “drive” (as defined in 40 CFR 1065.510(f)(4) for variable speed engines) for use in the CO<sub>2</sub> emission calculation in 40 CFR 1037.510(b). The proposed regulations

at 40 CFR part 1065 specify that there must be two consecutive reference zero load idle points to establish periods of zero load idle for purposes of calculating total work over an engine test cycle. These two idle points from the engine test would be used in GEM for purposes of calculating emissions during vehicle idling over the vocational vehicle test cycles.

The agencies welcome comments on the inclusion of these technologies into GEM in Phase 2.

#### (iii) Weight Reduction Inputs

In Phase 1, the agencies adopted tractor regulations that provided manufacturers with the ability to utilize high strength steel and aluminum components for weight reduction without the burden of entering the curb weight of every tractor produced. In Phase 2, the agencies propose to apply relevant weights from the tractor lookup table to vocational vehicles. As noted above, the agencies are proposing to recognize weight reduction by allocating one half of the weight reduction to payload in the denominator, while one

half of the weight reduction would be subtracted from the overall weight of the vehicle in GEM.

To adapt the tractor table for vocational vehicles, the agencies propose to add lookup values for vehicles in lower weight classes. We believe it is appropriate to also recognize the weight reduction associated with 6x2 axles.<sup>319</sup> Components available for vocational vehicle manufacturers to select for weight reduction are shown below in Table V–29, below. We are also proposing to assign a fixed weight increase to natural gas fueled vehicles to reflect the weight increase of natural gas fuel tanks versus gasoline or diesel tanks. These are shown as negative values in Table V–29 to indicate that GEM would internally compute these values in an inverse manner as would be computed for a weight reduction, for which the GEM input is a positive numerical value. We welcome comments on all aspects of weight reduction approaches and potential weight increases as a byproduct of technology application.

TABLE V–29 PROPOSED PHASE 2 WEIGHT REDUCTION TECHNOLOGIES FOR VOCATIONAL VEHICLES

Component	Material	Vocational Vehicle Class		
		Class 2b–5	Class 6–7	Class 8
Axle Hubs—Non-Drive .....	Aluminum .....	40		40
Axle Hubs—Non-Drive .....	High Strength Steel .....	5		5
Axle—Non-Drive .....	Aluminum .....	60		60
Axle—Non-Drive .....	High Strength Steel .....	15		15
Brake Drums—Non-Drive .....	Aluminum .....	60		60
Brake Drums—Non-Drive .....	High Strength Steel .....	8		8
Axle Hubs—Drive .....	Aluminum .....	40		80
Axle Hubs—Drive .....	High Strength Steel .....	10		20
Brake Drums—Drive .....	Aluminum .....	70		140
Brake Drums—Drive .....	High Strength Steel .....	5.5		11
Clutch Housing .....	Aluminum .....	34		40
Clutch Housing .....	High Strength Steel .....	9		10
Suspension Brackets, Hangers .....	Aluminum .....	67		100
Suspension Brackets, Hangers .....	High Strength Steel .....	20		30
Transmission Case .....	Aluminum .....	45		50
Transmission Case .....	High Strength Steel .....	11		12
Crossmember—Cab .....	Aluminum .....	10	14	15
Crossmember—Cab .....	High Strength Steel .....	2	4	5
Crossmember—Non-Suspension .....	Aluminum .....	15	18	21
Crossmember—Non-Suspension .....	High Strength Steel .....	5	6	7
Crossmember—Suspension .....	Aluminum .....	15	20	25
Crossmember—Suspension .....	High Strength Steel .....	4	5	6
Driveshaft .....	Aluminum .....	12	40	50
Driveshaft .....	High Strength Steel .....	5	10	12
Frame Rails .....	Aluminum .....	120	300	440
Frame Rails .....	High Strength Steel .....	24	40	87
Wheels—Dual .....	Aluminum .....	126	126	210
Wheels—Dual .....	High Strength Steel .....	48	48	80
Wheels—Dual .....	Lightweight Aluminum .....	180	180	300
Wheels—Wide Base Single .....	Aluminum .....	278	278	556
Wheels—Wide Base Single .....	High Strength Steel .....	168	168	336
Wheels—Wide Base Single .....	Lightweight Aluminum .....	294	294	588

<sup>319</sup> See NACFE Confidence Findings on the Potential of 6x2 Axles, Note 152 above.

TABLE V—29 PROPOSED PHASE 2 WEIGHT REDUCTION TECHNOLOGIES FOR VOCATIONAL VEHICLES—Continued

Component	Material	Vocational Vehicle Class		
		Class 2b–5	Class 6–7	Class 8
Permanent 6x2 Axle Configuration .....	Multi .....	N/A	N/A	300
CI Liquefied Natural Gas Vocational Vehicle .....	Multi .....	320 321 — 600 — 525 — 900		
SI Compressed Natural Gas Vocational Vehicle .....	Multi .....			
CI Compressed Natural Gas Vocational Vehicle .....	Multi .....			

## (b) Test Procedures

Powertrain families are defined in Section II.C.3.b, and powertrain test procedures are discussed in the draft RIA Chapter 3. The agencies propose that the results from testing a powertrain configuration using the matrix of tests described in draft RIA Chapter 3.6 could be applied broadly across all vocational vehicles in which that powertrain would be installed.

As in Phase 1, the rolling resistance of each tire would be measured using the ISO 28850 test method for drive tires and steer tires planned for fitment to the vehicle being certified. Once the test CRR values are obtained, a manufacturer would input the CRR values for the drive and steer tires separately into the GEM. For vocational vehicles in Phase 2, the agencies propose that the vehicle load would be distributed with 30 percent of the load over the steer tires and 70 percent of the load over the drive tires. With these data entered, the amount of GHG reduction attributed to tire rolling resistance would be incorporated into the overall vehicle compliance value.

## (c) Useful Life and In-Use Standards

Section 202(a)(1) of the CAA specifies that emission standards are to be applicable for the useful life of the vehicle. The standards that EPA and NHTSA are proposing would apply to individual vehicles and engines at production and in use. NHTSA is not proposing in-use standards for vehicles and engines.

Manufacturers may be required to submit, as part of the application for certification, an engineering analysis showing that emission control performance will not deteriorate during the useful life, with proper maintenance. If maintenance will be required to prevent or minimize deterioration, a demonstration may be required that this maintenance will be performed in use. See 40 CFR 1037.241.

EPA is proposing to continue the Phase 1 approach to adjustment factors and deterioration factors. The technologies on which the Phase 1 vocational vehicle standards were predicated were not expected to have any deterioration of GHG effectiveness in use. However, the regulations provided a process for manufacturers to develop deterioration factors (DF) if they needed. We anticipate that some hybrid powertrain systems may experience some deterioration of effectiveness with age of the energy storage device. We believe the regulations in place currently provide adequate instructions to manufacturers for developing DF where needed. We request comment on whether any changes to the DF process are needed.

As with engine certification, a manufacturer must provide evidence of compliance through the regulatory useful life of the vehicle. Factors influencing vehicle-level GHG performance over the life of the vehicle fall into two basic categories: Vehicle attributes and maintenance items. Each category merits different treatment from the perspective of assessing useful life compliance, as each has varying degrees of manufacturer versus owner/operator responsibility.

For vocational vehicles, attributes generally refers to components that are installed by the manufacturer to meet the standard, whose reduction properties are assessed at the time of certification, and which are expected to last the full life of the vehicle with effectiveness maintained as new for the life of the vehicle with no special maintenance requirements. To assess useful life compliance, we are proposing to follow a design-based approach that would ensure that the manufacturer has robustly designed these features so they can reasonably be expected to last the useful life of the vehicle.

For vocational vehicles, maintenance items generally refers to items that are replaced, renewed, cleaned, inspected, or otherwise addressed in the preventative maintenance schedule specified by the vehicle manufacturer. Replacement items that have a direct

influence on GHG emissions are primarily tires and lubricants, but may also include hybrid system batteries. Synthetic engine oil may be used by vehicle manufacturers to reduce the GHG emissions of their vehicles. Manufacturers may specify that these fluids be changed throughout the useful life of the vehicle. If this is the case, the manufacturer should have a reasonable basis that the owner/operator will use fluids having the same properties. This may be accomplished by requiring (in service documentation, labeling, etc.) that only these fluids can be used as replacements. In this proposal, the only maintenance costs we have quantified are those for tire replacement, as described in Section IX.C.3 and the draft RIA Chapter 7.1. The agencies invite comments with information related to maintenance costs that the agencies should quantify for the final rules.

For current non-hybrid technologies, if the vehicle remains in its original certified condition throughout its useful life, it is not believed that GHG emissions would increase as a result of service accumulation. As in Phase 1, the agencies propose allowing the use of an assigned deterioration factor of zero where appropriate in Phase 2; however this does not negate the responsibility of the manufacturer to ensure compliance with the emission standards throughout the useful life. The vehicle manufacturer would be primarily responsible for providing engineering analysis demonstrating that vehicle attributes will last for the full useful life of the vehicle. We anticipate this demonstration would show that components are constructed of sufficiently robust materials and design practices so as not to become dysfunctional under normal operating conditions.

In Phase 1, EPA set the useful life for engines and vehicles with respect to GHG emissions equal to the respective useful life periods for criteria pollutants. In April 2014, as part of the Tier 3 light-duty vehicle final rule, EPA extended the regulatory useful life period for criteria pollutants to 150,000 miles or 15 years, whichever comes first, for Class

<sup>320</sup> See National Energy Policy Institute (2012), Note 200 above.

<sup>321</sup> See Westport presentation (2013), Note 201, above.

2b and 3 pickup trucks and vans and some light-duty trucks (79 FR 23414, April 28, 2014). Class 2 through Class 5 heavy-duty vehicles subject to the GHG standards described in this section for vocational applications generally use the same kinds of engines, transmissions, and emission controls as the Class 2b and 3 vehicles that are chassis-certified to the criteria standards under 40 CFR part 86, subpart S. EPA and NHTSA are therefore proposing that the Phase 2 GHG and fuel consumption standards for vocational vehicles at or below 19,500 lbs GVWR apply over the same useful life of 150,000 miles or 15 years. In many cases, this will result in aligned useful-life values for criteria and GHG standards. Where this longer useful life is not aligned with the useful life that applies for criteria standards (generally in the case of engine-based certification under 40 CFR part 86, subpart A), EPA may revisit the useful-life values for both criteria and GHG standards in a future rulemaking. For medium heavy-duty vehicles (19,500 to 33,000 lbs GVWR) and heavy heavy-duty vehicles (above 33,000 lbs GVWR) EPA is proposing to keep the useful-life

values from Phase 1, which are 185,000 miles (or 10 years) and 435,000 miles (or 10 years), respectively. EPA requests comment on this approach, including the proposed values and the overall process envisioned for achieving the long-term goal of adopting harmonized useful-life specifications for criteria and GHG standards that properly represent the manufacturers' obligation to meet emission standards over the expected service life of the vehicles. EPA may also revisit the useful-life values that apply for medium heavy-duty vehicles and heavy heavy-duty vehicles.

One technology option for vocational vehicle manufacturers to reduce GHG emissions is to use a smaller engine, perhaps in conjunction with a hybrid powertrain. This could lead to a situation where the engine and the vehicle are subject to emission standards over different useful-life periods. For example, an urban bus (heavy heavy-duty vehicle), might be able to use a medium heavy-duty engine, or even a light heavy-duty engine. While such a mismatch in useful life values could be confusing, we don't believe it poses any particular policy problem that we need to address.

EPA requests comment on the possibility of mismatched engine and vehicle useful-life values and on any possible implications this may have for manufacturers' ability to design, certify, produce, and sell their engines and vehicles.

#### (d) Assigning Vehicles to Test Cycles

The agencies propose the following logic for deciding which chassis configurations would be assigned to each of the three proposed vocational duty cycles and thus regulatory subcategories:

- A vehicle would be certified over the Multipurpose Duty Cycle, unless one of the following conditions warrants certifying over either the Regional or Urban cycle.
- If the vehicle is powered by a CI engine, use the Regional Duty Cycle if the resulting value from the calculation described in Equation V-1 is less than 75 percent.
- If the vehicle is powered by a SI engine, use the Regional Duty Cycle if the resulting value from the calculation described in Equation V-1 is less than 45 percent.

#### Equation V-1 Proposed Regional Duty Cycle Cutpoint

$$\text{Cutpoint Regional} = \left( \frac{65 \text{ mph} \times \text{axle ratio} \times \text{trans ratio} \times C}{\text{SLR} * f_{\text{ntest}}} \right) \times 100$$

Where:

Cutpoint<sub>Regional</sub> is the percent of maximum engine test speed that is achieved at a vehicle speed of 65 mph,

SLR is the static loaded tire radius entered into GEM as specified in the regulations, Axle ratio is the drive axle ratio that entered into GEM as specified in the regulations,

Trans ratio is the ratio of the top transmission gear that is not permanently locked out,  $f_{\text{ntest}}$  is the maximum engine test speed as defined at 40 CFR 1065.610, and C is a constant equal to:

$$\frac{5280 \frac{\text{ft}}{\text{mi}} \times 12 \frac{\text{in}}{\text{ft}} \times .0254 \frac{\text{m}}{\text{in}}}{60 \frac{\text{min}}{\text{hr}} \times 2\pi}$$

- If a vehicle is powered by a CI engine, use the Urban Duty Cycle if the resulting value from the calculation

described in Equation V-2 is greater than 90 percent.

- If a vehicle is powered by a SI engine, use the Urban Duty Cycle if the

resulting value from the calculation described in Equation V-2 is greater than 50 percent.

#### Equation V-2 Proposed Urban Duty Cycle Cutpoint

$$\text{Cutpoint Urban} = \left( \frac{55 \text{ mph} \times \text{axle ratio} \times \text{trans ratio} \times C}{\text{SLR} * f_{\text{ntest}}} \right) \times 100$$

Where:

Cutpoint<sub>Urban</sub> is the percent of maximum engine test speed that is achieved at a vehicle speed of 55 mph,

SLR is the static loaded tire radius entered into GEM as specified in the regulations, Axle ratio is the drive axle ratio that is entered into GEM as specified in the regulations,

Trans ratio is the ratio of the top transmission gear that is not permanently locked out,  $f_{\text{ntest}}$  is the maximum engine test speed as defined at 40 CFR 1065.610, and C is a constant equal to:

$$\frac{5280 \frac{ft}{mi} \times 12 \frac{in}{ft} \times .0254 \frac{m}{in}}{60 \frac{min}{hr} \times 2\pi}$$

The agencies ran GEM with many vocational vehicle configurations to develop a data set with which we could assess appropriate cutpoints for the above equations. The configurations varied primarily by the engine model, fuel type, and axle ratio. See the draft RIA Chapter 2.9.2 for further details on the assessment process for these proposed cutpoints.

The agencies realize that there are vocational vehicles for which the above logic may not result in an appropriate assignment of test cycle. Therefore we are proposing an exception that would enable any vehicle with a hybrid drivetrain to certify over the Urban test cycle. Further, we are proposing that the following vehicles must be certified using the Regional cycle: intercity coach buses, recreational vehicles, and vehicles whose engine is exclusively certified over the SET. We are also proposing to allow manufacturers to request a different duty cycle. We request comment on this approach, and whether we should allow manufacturers to have complete freedom to select a test cycle without any need for EPA or NHTSA approval.

## (2) Other Compliance Provisions

### (a) Emission Control Labels

The agencies consider it crucial that authorized compliance inspectors are able to identify whether a vehicle is certified, and if so whether it is in its certified condition. To facilitate this identification in Phase 1, EPA adopted labeling provisions for vocational vehicles that included several items. The Phase 1 vocational vehicle label must include the manufacturer, vehicle identifier such as the Vehicle Identification Number, vehicle family, regulatory subcategory, date of manufacture, compliance statements, and emission control system identifiers (see 40 CFR 1037.135). In Phase 1, the vocational vehicle emission control system identifier is tire rolling resistance, plus any innovative and advanced technologies.

The number of proposed emission control systems for greenhouse gas

emissions in Phase 2 has increased significantly. For example, the engine, transmission, axle configuration, tire radius, and idle reduction system are control systems that can be evaluated on-cycle in Phase 2 (*i.e.* these technologies' performance can now be input to GEM), but could not be evaluated in Phase 1. Due to the complexity in determining greenhouse gas emissions as proposed in Phase 2, the agencies do not believe that we can unambiguously determine whether or not a vehicle is in a certified condition through simply comparing information that could be made available on an emission control label with the components installed on a vehicle. Therefore, EPA proposes to remove the requirement to include the emission control system identifiers required in 40 CFR 1037.135(c)(6) and in Appendix III to 40 CFR part 1037 from the emission control labels for vocational vehicles certified to the primary Phase 2 standards. However, the agencies may finalize requirements to maintain some label content to facilitate a limited visual inspection of key vehicle parameters that can be readily observed. Such requirements may be very similar to the labeling requirements from the Phase 1 rulemaking, though we would want to more carefully consider the list of technologies that would allow for the most effective inspection. We request comment on an appropriate list of candidate technologies that would properly balance the need to limit label content with the interest in providing the most useful information for inspectors to confirm that vehicles have been properly built. EPA is not proposing to modify the existing emission control labels for vocational vehicles certified for MYs 2014–2020 (Phase 1) CO<sub>2</sub> standards.

Under the agencies' existing authorities, manufacturers must provide detailed build information for a specific vehicle upon our request. Our expectation is that this information should be available to us via email or other similar electronic communication on a same-day basis, or within 24 hours

of a request at most. We request comment on any practical limitations in promptly providing this information. We also request comment on approaches that would minimize burden for manufacturers to respond to requests for vehicle build information and would expedite an authorized compliance inspector's visual inspection. For example, the agencies have started to explore ideas that would provide inspectors with an electronic method to identify vehicles and access on-line databases that would list all of the engine-specific and vehicle-specific emissions control system information. We believe that electronic and Internet technology exists today for using scan tools to read a bar code or radio frequency identification tag affixed to a vehicle that would then lead to secure on-line access to a database of manufacturers' detailed vehicle and engine build information. Our exploratory work on these ideas has raised questions about the level of effort that would be required to develop, implement and maintain an information technology system to provide inspectors real-time access to this information. We have also considered questions about privacy and data security. We request comment on the concept of electronic labels and database access, including any available information on similar systems that exist today and on burden estimates and approaches that could address concerns about privacy and data security. Based on new information that we receive, we may consider initiating a separate rulemaking effort to propose and request comment on implementing such an approach.

### (b) End of Year Reports

In the Phase 1 program, manufacturers participating in the ABT program provided 90 day and 270 day reports to EPA and NHTSA after the end of the model year. The agencies adopted two reports for the initial program to help manufacturers become familiar with the reporting process. For the HD Phase 2 program, the agencies propose to simplify reporting such that



manufacturers would only be required to submit one end of the year report 120 days after the end of the model year with the potential to obtain approval for a delay up to 30 days. We welcome comment on this proposed revision.

#### (c) Delegated Assembly

The proposed standards for vocational vehicles are based on the application of a wide range of technologies. Certifying vehicle manufacturers manage their compliance demonstration to reflect this range of technologies by describing their certified configurations in the application for certification. In many cases, these technologies are designed and assembled (or installed) directly by the certifying vehicle manufacturer, which is typically the chassis manufacturer. In these cases, it is straightforward to assign the responsibility to the certifying vehicle manufacturer for ensuring that vehicles are in their proper certified configuration when sold to the ultimate user. In Phase 1, the only vehicle technology available for certified vocational vehicles was LRR tires. Because these are generally installed by the chassis manufacturer, there would have been no need to rely on a second stage manufacturer for purposes of certification.

In Phase 2, the agencies are considering certain technologies where the certifying vehicle manufacturer may want or need to rely on a downstream manufacturing company (a secondary vehicle manufacturer) to take steps to assemble or install certain components or technologies to bring the vehicle into a certified configuration. A similar relationship between manufacturers applies with aftertreatment devices for certified engines. EPA has adopted "delegated assembly" provisions for engines at 40 CFR 1068.261 to describe how manufacturers can share compliance responsibilities through these cooperative assembly procedures.

We are proposing to take a similar approach for vehicle-based GHG standards in 40 CFR part 1037. The delegated assembly provisions as proposed for GHG standards are focused on add-on features to reduce aerodynamic drag, and on air conditioning systems. This may occur, for example, if the certifying manufacturer sells a cab-complete chassis to a secondary vehicle manufacturer, which in turn installs a box with the appropriate aerodynamic accessories to reduce drag losses. To the extent certifying manufacturers rely on secondary vehicle manufacturers to bring the vehicle into a certified

configuration, the following provisions would apply:

- The certifying manufacturer would describe their approach to delegated assembly in the application for certification.
- The certifying manufacturer would create installation instructions to describe how the secondary vehicle manufacturer would bring the vehicle into a certified configuration.
- The certifying manufacturer would have a contractual agreement with each affected secondary vehicle manufacturer obligating the secondary vehicle manufacturer to build each vehicle into a certified configuration and to provide affidavits confirming proper assembly procedures, and to provide information regarding deployment of each type of technology (if there are technology options that relate to different GEM input values).

The delegated assembly provisions are most relevant to vocational vehicles, but we are not proposing to limit these provisions to vocational vehicles. Similarly, we expect that aerodynamic devices and air conditioning systems are the most likely technologies for which delegated assembly is appropriate, but we are not proposing to limit the use of delegated assembly to these technologies.

Secondary manufacturers (such as body builders) that build complete vehicles from certified chassis are obligated to comply with the emission-related installation instructions provided by the certifying manufacturer. Secondary manufacturers that build complete vehicles from exempted chassis are obligated to comply with all of the regulations.

The draft regulations at 40 CFR 1037.621 describe further detailed provisions related to delegated assembly. We request comment on all aspects of these provisions. In particular, we request comment on how the procedures should be applied more broadly or more narrowly for specific technologies. We also request comment on any further modifications that should be made to the delegated assembly provisions to reflect the nature of manufacturing relationships or technologies that are specific to greenhouse gas standards for heavy-duty highway vehicles.

#### (d) Demonstrating Compliance With Proposed HFC Leakage Standards

EPA is proposing requirements for vocational chassis manufacturers to demonstrate reductions in direct emissions of HFC in their A/C systems and components through a design-based method. The method for calculating A/

C leakage is the same as was adopted in Phase 1 for tractors and HD pickups and vans. It is based closely on an industry-consensus leakage scoring method, described below. This leakage scoring method is correlated to experimentally-measured leakage rates from a number of vehicles using the different available A/C components. As is done currently for other HD vehicles, vocational chassis manufacturers would choose from a menu of A/C equipment and components used in their vehicles in order to establish leakage scores, to characterize their A/C system leakage performance. The percent leakage per year would then be calculated as this score divided by the system refrigerant capacity.

Consistent with the light-duty rule and the Phase 1 program for other HD vehicles, EPA is proposing a requirement that vocational chassis manufacturers compare the components of a vehicle's A/C system with a set of leakage-reduction technologies and actions that is based closely on that developed through the Improved Mobile Air Conditioning program and SAE International (as SAE Surface Vehicle Standard J2727, "HFC-134a, Mobile Air Conditioning System Refrigerant Emission Chart," August 2008 version). See generally 75 FR 25426. The SAE J2727 approach was developed from laboratory testing of a variety of A/C related components, and EPA believes that the J2727 leakage scoring system generally represents a reasonable correlation with average real-world leakage in new vehicles. This approach associates each component with a specific leakage rate in grams per year that is identical to the values in J2727 and then sums together the component leakage values to develop the total A/C system leakage. Unlike the light-duty program, in the heavy-duty vehicle program, the total A/C leakage score is divided by the value of the total refrigerant system capacity to develop a percent leakage per year. EPA believes that the design-based approach results in estimates of likely leakage emissions reductions that are comparable to those that would result from performance-based testing.

Consistent with HD GHG Phase 1, EPA is not proposing a specific in-use standard for leakage, as neither test procedures nor facilities exist to measure refrigerant leakage from a vehicle's air conditioning system. However, consistent with the HD Phase 1 program and the light-duty rule, where we propose to require that manufacturers attest to the durability of components and systems used to meet the CO<sub>2</sub> standards (see 75 FR 25689), we

propose to require that manufacturers of heavy-duty vocational vehicles attest to the durability of these systems, and provide an engineering analysis that demonstrates component and system durability.

#### (e) Glider Vehicles

EPA is proposing to not exempt glider vehicles from the Phase 2 GHG emission and fuel consumption standards.<sup>322</sup> Gliders and glider kits are exempt from NHTSA's Phase 1 fuel consumption standards. EPA's interim provisions of Phase 1 exempted glider vehicles produced by small businesses from the Phase 1 CO<sub>2</sub> emission standards but did not include such a blanket exemption for other glider vehicles.<sup>323</sup> Thus, some glider vehicles are already subject to the requirement to obtain a vehicle certificate prior to introduction into commerce as a new vehicle. However, the agencies believe glider manufacturers may not understand how these regulations apply to them, resulting in a number of uncertified vehicles.

EPA is concerned about adverse economic impacts on small businesses that assemble glider kits and glider vehicles. Therefore, EPA is proposing a new provision that would grandfather existing small businesses, but cap annual production based on recent sales. This approach is consistent with the approach recommended by the Small Business Advocacy Review Panel, which believed there should be an allowance to produce some glider vehicles for legitimate purposes. EPA requests comment on whether any special provisions would be needed to accommodate glider vehicles. See Section XIV.B for additional discussion of the proposed requirements for glider vehicles.

Similarly, NHTSA is considering including gliders under its Phase 2 program. The agencies request comment on their respective considerations. We believe that the agencies potentially having different policies for glider kits and glider vehicles under the Phase 2 program would not result in problematic disharmony between the NHTSA and EPA programs, because of

the small number of vehicles that would be involved. EPA believes that its proposed changes would result in the glider market returning to the pre-2007 levels, in which fewer than 1,000 glider vehicles would be produced in most years. Given that a large fraction of these vehicles would be exempted from EPA regulations because they would be produced by qualifying small businesses, they would thus, in practice, be treated the same under EPA and NHTSA regulations. Only non-exempt glider vehicles would be subject to different requirements under the NHTSA and EPA regulations. However, we believe that this is unlikely to exceed a few hundred vehicles in any year, which would be few enough not to result in any meaningful disharmony between the two agencies.

With regard to NHTSA's safety authority over gliders, the agency notes that it has become increasingly aware of potential noncompliance with its regulations applicable to gliders. NHTSA has learned of manufacturers who are creating glider vehicles that are new vehicles under 49 CFR 571.7(e); however, the manufacturers are not certifying them and obtaining a new VIN as required. NHTSA plans to pursue enforcement actions as applicable against noncompliant manufacturers. In addition to enforcement actions, NHTSA may consider amending 49 CFR 571.7(e) and related regulations as necessary in the future. NHTSA believes manufacturers may not be using this regulation as originally intended.

#### (3) Proposed Compliance Flexibility Provisions

EPA and NHTSA are proposing three flexibility provisions specifically for vocational vehicle manufacturers in Phase 2. These are an averaging, banking and trading program for CO<sub>2</sub> emissions and fuel consumption credits, provisions for off-cycle credits for technologies that are not included as inputs to the GEM, and optional chassis certification. The agencies are also proposing to remove or modify several Phase 1 interim provisions, as described below. Program-wide compliance flexibilities are discussed in Section I.B.3 to I.C.1.

#### (a) Averaging, Banking, and Trading (ABT) Program

Averaging, banking, and trading of emission credits have been an important part of many EPA mobile source programs under CAA Title II. ABT provisions provide manufacturers flexibilities that assist in the efficient development and implementation of

new technologies and therefore enable new technologies to be implemented at a more aggressive pace than without ABT. NHTSA and EPA propose to carry over the Phase 1 ABT provisions for vocational vehicles into Phase 2, as it is an important way to achieve each agency's programmatic goals. ABT is also discussed in Section I and Section III.F.1.

Consistent with the Phase 1 averaging sets, the agencies propose that chassis manufacturers may average SI-powered vocational vehicle chassis with CI-powered vocational vehicle chassis, within the same vehicle weight class group. In Phase 1, all vocational and tractor chassis within a vehicle weight class group were able to average with each other, regardless of whether they were powered by a CI or SI engine. The proposed Phase 2 approach would continue this. The only difference is that in Phase 2, there would be different numerical standards set for the SI-powered and CI-powered vehicles, but that would not need to alter the basis for averaging. This is consistent with the Phase 1 approach where, for example, Class 8 day cab tractors, Class 8 sleeper cab tractors and Class 8 vocational vehicles each have different numerical standards, while they all belong to the same averaging set.

As discussed in V. E. (1) (c), EPA and NHTSA are proposing to change the useful life for LHD vocational vehicles for GHG emissions from the current 10 years/110,000 miles to 15 years/150,000 miles to be consistent with the useful life of criteria pollutants recently updated in EPA's Tier 3 rule. For the same reasons, EPA and NHTSA are also proposing a useful life adjustment for HD pickups and vans, as described in Section VI.E.(1). According to the credits calculation formula at 40 CFR 1037.705 and 49 CFR 535.7, useful life in miles is a multiplicative factor included in the calculation of CO<sub>2</sub> and fuel consumption credits. In order to ensure that banked credits would maintain their value in the transition from Phase 1 to Phase 2, NHTSA and EPA propose an interim vocational vehicle adjustment factor of 1.36 for credits that are carried forward from Phase 1 to the MY 2021 and later Phase 2 standards.<sup>324</sup> Without this adjustment factor the proposed change in useful life would effectively result in a discount of banked credits that are carried forward from Phase 1 to Phase 2, which is not the intent of the change in the useful life. The agencies do not believe that this proposed adjustment would result in a loss of program benefits because

<sup>322</sup> Glider vehicles are new vehicles produced to accept rebuilt engines (or other used engines) along with used axles and/or transmissions. The common term "glider kit" is used here primarily to refer to an assemblage of parts into which the used/rebuilt engine is installed.

<sup>323</sup> Rebuilt engines used in glider vehicles are subject to EPA criteria pollutant emission standards applicable for the model year of the engine. See 40 CFR 86.004–40 for requirements that apply for engine rebuilding. Under existing regulations, engines that remain in their certified configuration after rebuilding may continue to be used.

<sup>324</sup> See 40 CFR 1037.150(s) and 49 CFR 535.7.

there is little or no deterioration anticipated for CO<sub>2</sub> emissions and fuel consumption over the life of the vehicles. Also, the carry-forward of credits is an integral part of the program, helping to smoothing the transition to the new Phase 2 standards. The agencies believe that effectively discounting carry-forward credits from Phase 1 to Phase 2 would be unnecessary and could negatively impact the feasibility of the proposed Phase 2 standards. EPA and NHTSA request comment on all aspects of the averaging, banking, and trading program.

#### (b) Innovative and Off-Cycle Technology Credits

In Phase 1, the agencies adopted an emissions and fuel consumption credit generating opportunity that applied to innovative technologies that reduce fuel consumption and CO<sub>2</sub> emissions. These technologies were required to not be in common use with heavy-duty vehicles before the 2010MY and not reflected in the GEM simulation tool (*i.e.*, the benefits are “off-cycle”). See 76 FR 57253. The agencies propose to largely continue the Phase 1 innovative technology program but to redesignate it as an off-cycle program for Phase 2. The agencies propose to maintain that, in order for a manufacturer to receive credits for Phase 2, the off-cycle technology would still need to meet the requirement that it was not in common use prior to MY 2010.

The agencies recognize that there are emerging technologies today that are being developed, but would not be accounted for in the GEM tool, and therefore would be considered off-cycle. These technologies could include systems such as electrified accessories, air conditioning system efficiency, and aerodynamics for vocational vehicles beyond those tested and pre-approved in the HD Phase 2 program. Such off-cycle technologies could include known, commercialized technologies if they are not yet widely utilized in a particular heavy-duty sector subcategory. Any credits for these technologies would need to be based on real-world fuel consumption and GHG reductions that can be measured with verifiable test methods using representative driving conditions typical of the engine or vehicle application. More information about off-cycle technology credits can be found at Section I.C.1.c.

As in Phase 1, the agencies are proposing to continue to provide two paths for approval of the test procedure to measure the CO<sub>2</sub> emissions and fuel consumption reductions of an off-cycle

technology used in vocational vehicles. See 40 CFR 1037.610 and 49 CFR 535.7. The first path would not require a public approval process of the test method. A manufacturer could use “pre-approved” test methods for HD vehicles including the A-to-B chassis testing, powerpack testing or on-road testing. A manufacturer may also use any developed test procedure that has known quantifiable benefits. A test plan detailing the testing methodology would be required to be approved prior to collecting any test data. The agencies are also proposing to continue the second path, which includes a public approval process of any testing method that could have questionable benefits (*i.e.*, an unknown usage rate for a technology). Furthermore, the agencies are proposing to modify their provisions to clarify what documentation must be submitted for approval, which would align them with provisions in 40 CFR 86.1869–12. NHTSA is separately proposing to prohibit credits from technologies addressed by any of its crash avoidance safety rulemakings (*i.e.*, congestion management systems). See also 77 FR 62733 (discussion of similar issue in the light duty greenhouse gas/fuel economy regulations). We welcome recommendations on how to improve or streamline the off-cycle technology approval process.

There are some technologies that are entering the market today, and although our model does not have the capability to simulate the effectiveness over the test cycles, there are reliable estimates of effectiveness available to the agencies. These are proposed to be recognized in our HD Phase 2 certification procedures as pre-defined technologies, and would not be considered off-cycle. Examples of such technologies for vocational vehicles include 6x2 axles and axle lubricants. These default effectiveness values would be used as valid inputs to GEM. The projected effectiveness of each vocational vehicle technology is discussed in the draft RIA Chapter 2.9.

The agencies propose that the approval for Phase 1 innovative technology credits (approved prior to 2021 MY) would be carried into the Phase 2 program on a limited basis for those technologies where the benefit is not accounted for in the Phase 2 test procedure. Therefore, the manufacturers would not be required to request new approval for any innovative credits carried into the off-cycle program, but would have to demonstrate the new cycle does not account for these improvements beginning in the 2021 MY. The agencies believe this is appropriate because technologies, such

as those related to the transmission or driveline, may no longer be “off-cycle” because of the addition of these technologies into the Phase 2 version of GEM. The agencies also seek comments on whether off-cycle technologies in the Phase 2 program should be limited by infrequent common use and by what model years, if any. We also seek comments on an appropriate penetration rate for a technology not to be considered in common use.

#### (c) Optional Chassis Certification

In Phase 2, the agencies are proposing to continue the Phase 1 provisions allowing the optional chassis certification of vehicles over 14,000 lbs GVWR. In Phase 1 the agencies allowed manufacturers the option to choose to comply with heavy-duty pickup or van standards, for incomplete vehicles that were identical to those on complete pickup truck or van counterparts, with respect to most components that affect GHG emissions and fuel consumption, such as engines, cabs, frames, transmissions, axles, and wheels. The incomplete vehicles would typically be produced as cab-complete vehicles. For example, a manufacturer could certify under this allowance an incomplete pickup truck that includes the cab, but not the bed. The Phase 1 program also includes provisions that allow manufacturers to include some Class 4 and Class 5 vehicles in averaging sets subject to the chassis-based HD pickup and van standards, rather than the vocational vehicle program.<sup>325</sup>

This optional chassis certification of vehicles over 14,000 lbs applies for greenhouse gas emission standards in Phase 1, but not for criteria pollutant emission standards. We revisited this issue in the recent Tier 3 final rule, where we revised the regulation to allow this same flexibility relative to exhaust emission standards for criteria pollutants. However, EPA is now seeking comment on the proper approach for certifying vehicles above 14,000 lbs GVWR, because there are lingering questions about how best to align the certification processes for GHG emissions and for criteria pollutants. The agencies are requesting comment on several issues on this topic, including whether there should be an upper weight limit to this allowance. See Section XIV.A.2 for the issues on which the agencies seek comment with respect to chassis and engine certification for GHG and criteria pollutants for vehicles opting into the HD pickup and van program.

<sup>325</sup> See 76 FR 57259–57260, September 15, 2011 and 78 FR 36374, June 17, 2013.

(d) Phase 1 Flexibilities Not Proposed for Phase 2

As described above in Section I, the agencies are not proposing to provide advanced technology credits in Phase 2. These technologies had been defined in Phase 1 as hybrid powertrains, Rankine cycle engines, all-electric vehicles, and fuel cell vehicles (see 40 CFR 1037.150(i)), at a 1.5 credit value with the purpose to promote the early implementation of advanced technologies that were not expected to be widely adopted in the market in the 2014 to 2018 time frame. Our feasibility assessment for the proposed Phase 2 vocational vehicle standards includes a projection of the use of hybrid powertrains as described earlier in this section; therefore the agencies believe it would no longer be appropriate to provide extra credit for this technology. As noted above, waste heat recovery is not projected to be utilized for vocational vehicles within the time frame of Phase 2. While the agencies are not proposing to premise the Phase 2 vocational vehicle standards on fuel cells or electric vehicles, we expect that any vehicle certified with this technology would provide such a large credit to a manufacturer that an additional incentive credit would not be necessary. We welcome comments on the need for such incentives, including information on why an incentive for specific technologies in this time frame may be warranted, recognizing that the incentive would result in reduced benefits in terms of CO<sub>2</sub> emissions and fuel use due to the Phase 2 program.

The agencies are not proposing to extend early credits to manufacturers who comply early with Phase 2 standards, because the ABT program from Phase 1 will be available to manufacturers and this displaces the need for early credits (see 40 CFR 1037.150(a)). Please see the more complete discussion of this above in Section I.

Another Phase 1 interim flexibility that the agencies are not proposing to continue in Phase 2 is the flexibility known as the “loose engine” provision, whereby SI engines sold to chassis manufacturers and intended for use in vocational vehicles need not meet the separate SI engine standard (see preamble Section II and draft RIA Chapter 2.6), and instead may be averaged with the manufacturer’s HD pickup and van fleet. We believe the benefits this particular flexibility offers for manufacturers in the interim between Phase 1 and Phase 2 would diminish considerably in Phase 2. The agencies are proposing a Phase 2 SI

engine standard that is no more stringent than the MY 2016 SI engine standard adopted in Phase 1, while the proposed Phase 2 standards for the HD pickup and van fleet would be progressively more stringent through MY 2027. The primary certification path designed in the Phase 1 program for both CI and SI engines sold separately and intended for use in vocational vehicles was that they be engine certified while the vehicle would be GEM certified under the GHG rules. In Phase 2 the agencies propose to continue this as the certification path for such engines intended for vocational vehicles. See the draft RIA Chapter 2.6 for further discussion of the separate engine standard for SI engines intended for vocational vehicles.

(e) Other Phase 1 Interim Provisions

In HD Phase 1, EPA adopted provisions to delay the onboard diagnostics (OBD) requirements for heavy-duty hybrid powertrains (see 40 CFR 86.010–18(q)). This provision delayed full OBD requirements for hybrids until MY 2016 and MY 2017. In discussion with manufacturers during the development of Phase 2, the agencies have learned that meeting the on-board diagnostic requirements for criteria pollutant engine certification continues to be a potential impediment to adoption of hybrid systems. See Section XIII.A.1 for a discussion of regulatory changes proposed to reduce the non-GHG certification burden for engines paired with hybrid powertrain systems.

Also in Phase 1, EPA adopted provisions that reinforced the fact that we were setting GHG emissions from the tailpipe of heavy-duty vehicles. Therefore, we treated all electric vehicles as having zero emissions of CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O (see 40 CFR 1037.150(f)). Similarly, NHTSA adopted regulations in Phase 1 that set the fuel consumption standards based on the fuel consumed by the vehicle. The agencies also did not require emission testing for electric vehicles in Phase 1. The agencies considered the potential unintended consequence of ignoring upstream emissions from the charging of heavy-duty battery-electric vehicles. In our assessment, we have observed that the few all-electric heavy-duty vocational vehicles that have been certified are being produced in very small volumes in MY2014. As we look to the future, we project very limited adoption of electric vocational vehicles into the market; therefore, we believe that this provision is still appropriate. Unlike the MY2012–2016 light-duty rule, which adopted a cap whereby

upstream emissions would be counted after a certain volume of sales (see 75 FR 25434–25436), we believe there is no need to propose a cap for vocational vehicles because of the infrequent projected use of EV technologies in the Phase 2 timeframe. In Phase 2, we propose to continue to deem electric vehicles as having zero CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O emissions as well as zero fuel consumption. We welcome comments on this approach.

## VI. Heavy-Duty Pickups and Vans

### A. Introduction and Summary of Phase 1 HD Pickup and Van Standards

In the Phase 1 rule, EPA and NHTSA established GHG and fuel consumption standards and a program structure for complete Class 2b and 3 heavy-duty vehicles (referred to in these rules as “HD pickups and vans”), as described below. The Phase 1 standards began to be phased-in in MY 2014 and the agencies believe the program is working well. The agencies are proposing to retain most elements from the structure of the program established in the Phase 1 rule for the Phase 2 program while proposing more stringent Phase 2 standards for MY 2027, phased in over MYs 2021–2027, that would require additional GHG reductions and fuel consumption improvements. The MY 2027 standards would remain in place unless and until amended by the agencies.

Heavy-duty vehicles with GVWR between 8,501 and 10,000 lb are classified in the industry as Class 2b motor vehicles. Class 2b includes vehicles classified as medium-duty passenger vehicles (MDPVs) such as very large SUVs. Because MDPVs are frequently used like light-duty passenger vehicles, they are regulated by the agencies under the light-duty vehicle rules. Thus the agencies did not adopt additional requirements for MDPVs in the Phase 1 rule and are not proposing additional requirements for MDPVs in this rulemaking. Heavy-duty vehicles with GVWR between 10,001 and 14,000 lb are classified as Class 3 motor vehicles. Class 2b and Class 3 heavy-duty vehicles together emit about 15 percent of today’s GHG emissions from the heavy-duty vehicle sector.

About 90 percent of HD pickups and vans are <sup>3</sup>/<sub>4</sub>-ton and 1-ton pickup trucks, 12- and 15-passenger vans, and large work vans that are sold by vehicle manufacturers as complete vehicles, with no secondary manufacturer making substantial modifications prior to registration and use. Most of these vehicles are produced by companies with major light-duty markets in the

United States, primarily Ford, General Motors, and Chrysler. Often, the technologies available to reduce fuel consumption and GHG emissions from this segment are similar to the technologies used for the same purpose on light-duty pickup trucks and vans, including both engine efficiency improvements (for gasoline and diesel engines) and vehicle efficiency improvements.

In the Phase 1 rule EPA adopted GHG standards for HD pickups and vans based on the whole vehicle (including the engine), expressed as grams of CO<sub>2</sub> per mile, consistent with the way these vehicles are regulated by EPA today for criteria pollutants. NHTSA adopted corresponding gallons per 100 mile fuel consumption standards that are likewise based on the whole vehicle. This complete vehicle approach adopted by both agencies for HD pickups and vans was consistent with the recommendations of the NAS Committee in its 2010 Report. EPA and NHTSA adopted a structure for the Phase 1 HD pickup and van standards that in many respects paralleled long-standing NHTSA CAFE standards and more recent coordinated EPA GHG standards for manufacturers' fleets of new light-duty vehicles. These commonalities include a new vehicle fleet average standard for each manufacturer in each model year and the determination of these fleet average standards based on production volume-weighted targets for each model, with the targets varying based on a defined vehicle attribute. Vehicle testing for both the HD and light-duty vehicle programs is conducted on chassis dynamometers using the drive cycles from the EPA Federal Test Procedure (Light-duty FTP or "city" test) and

Highway Fuel Economy Test (HFET or "highway" test).<sup>326</sup>

For the light-duty GHG and fuel economy<sup>327</sup> standards, the agencies factored in vehicle size by basing the emissions and fuel economy targets on vehicle footprint (the wheelbase times the average track width).<sup>328</sup> For those standards, passenger cars and light trucks with larger footprints are assigned higher GHG and lower fuel economy target levels in acknowledgement of their inherent tendency to consume more fuel and emit more GHGs per mile. EISA requires that NHTSA study "the appropriate metric for measuring and expressing commercial medium- and heavy-duty vehicle and work truck fuel efficiency performance, taking into consideration, among other things, the work performed by such on-highway vehicles and work trucks . . ." See 49 U.S.C. 32902(k)(1)(B).<sup>329</sup> For HD pickups and vans, the agencies also set standards based on vehicle attributes, but used a work-based metric as the attribute rather than the footprint attribute utilized in the light-duty vehicle rulemaking. Work-based measures such as payload and towing capability are key among the parameters that characterize differences

<sup>326</sup> The Light-duty FTP is a vehicle driving cycle that was originally developed for certifying light-duty vehicles and subsequently applied to HD chassis testing for criteria pollutants. This contrasts with the Heavy-duty FTP, which refers to the transient engine test cycles used for certifying heavy-duty engines (with separate cycles specified for diesel and spark-ignition engines).

<sup>327</sup> Light duty fuel *economy* standards are expressed as miles per gallon (mpg), which is inverse to the HD fuel *consumption* standards which are expressed as gallons per 100 miles.

<sup>328</sup> EISA requires CAFE standards for passenger cars and light trucks to be attribute-based; See 49 U.S.C. 32902(b)(3)(A).

<sup>329</sup> The NAS 2010 report likewise recommended standards recognizing the work function of HD vehicles. See 76 FR 57161.

in the design of these vehicles, as well as differences in how the vehicles will be utilized. Buyers consider these utility-based attributes when purchasing a HD pickup or van. EPA and NHTSA therefore finalized Phase 1 standards for HD pickups and vans based on a "work factor" attribute that combines the vehicle's payload and towing capabilities, with an added adjustment for 4-wheel drive vehicles. See generally 76 FR 57161–57162.

For Phase 1, the agencies adopted provisions such that each manufacturer's fleet average standard is based on production volume-weighting of target standards for all vehicles that in turn are based on each vehicle's work factor. These target standards are taken from a set of curves (mathematical functions). The Phase 1 curves are shown in the figures below for reference and are described in detail in the Phase 1 final rule.<sup>330</sup> The agencies established separate curves for diesel and gasoline HD pickups and vans. The agencies are proposing to continue to use the work-based attribute and gradually declining standards approach for the Phase 2 standards, as discussed in Section VI.B. below. Note that this approach does not create an incentive to reduce the capabilities of these vehicles because less capable vehicles are required to have proportionally lower emissions and fuel consumption targets.

<sup>330</sup> The Phase 1 Final Rule provides a full discussion of the standard curves including the equations and coefficients. See 76 FR 57162–57165, September 15 2011. The standards are also provided in the regulations at 40 CFR 1037.104 (which is proposed to be redesignated as 40 CFR 86.1819–14).

<sup>331</sup> The NHTSA program provides voluntary standards for model years 2014 and 2015. Target line functions for 2016–2018 are for the second NHTSA alternative described in the Phase 1 preamble Section II.C (d)(ii).

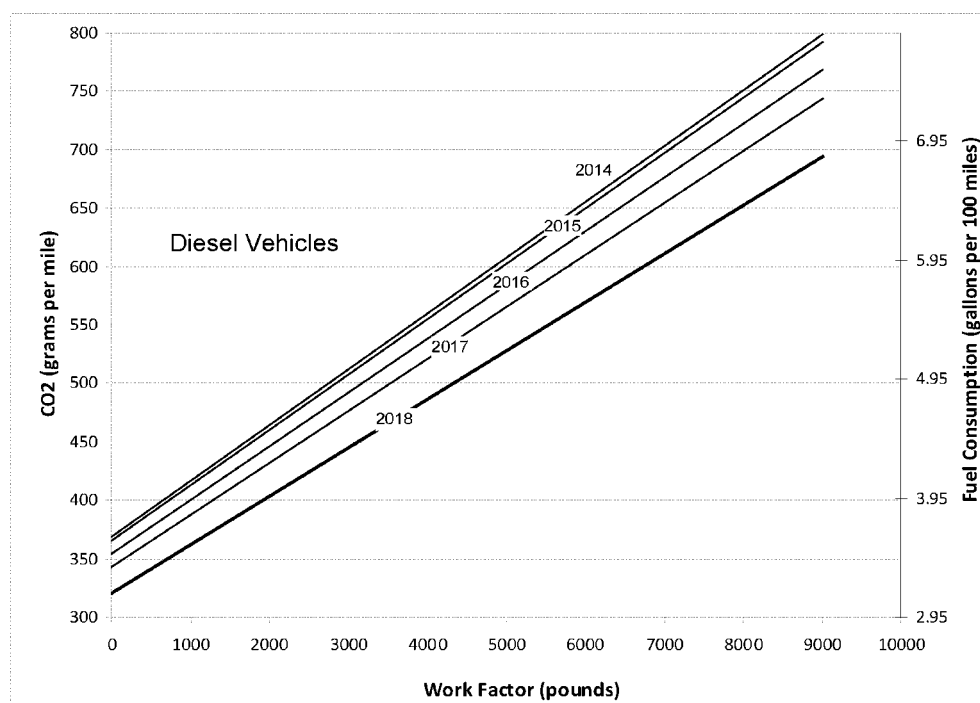


Figure VI-1 EPA Phase 1 CO<sub>2</sub> Target Standards and NHTSA Fuel Consumption Target Standards for Diesel HD Pickups and Vans<sup>331</sup>

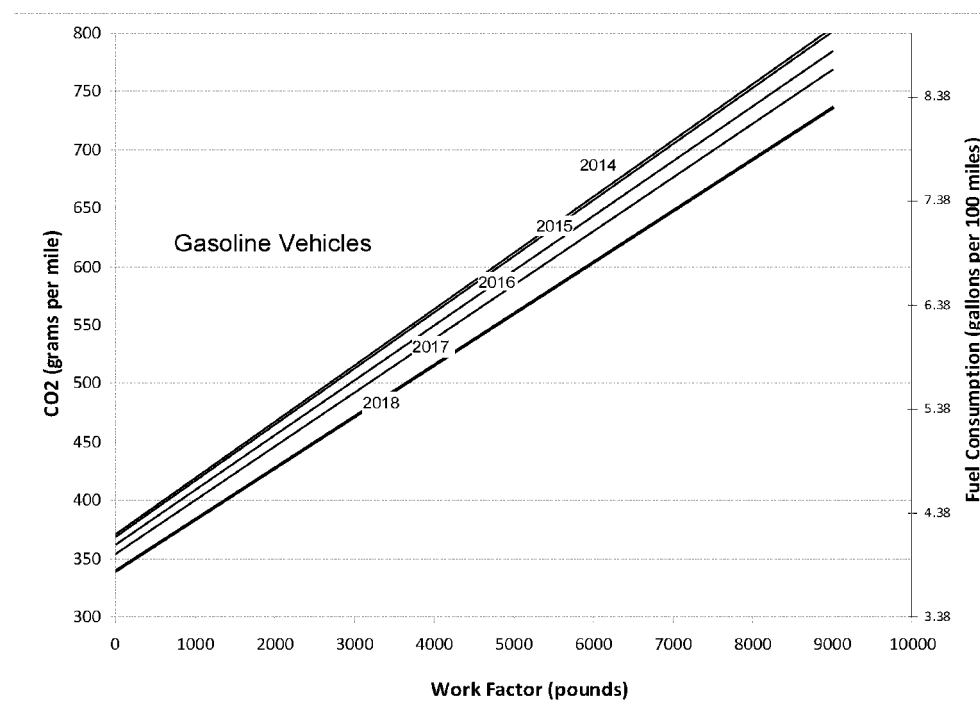


Figure VI-2 EPA Phase 1 CO<sub>2</sub> Target Standards and NHTSA Fuel Consumption Target Standards for Gasoline HD Pickups and Vans

EPA phased in its CO<sub>2</sub> standards gradually starting in the 2014 model year, at 15–20–40–60–100 percent of the model year 2018 standards stringency level in model years 2014–2015–2016–2017–2018, respectively. The phase-in

takes the form of the set of target standard curves shown above, with increasing stringency in each model year. The final EPA Phase 1 standards for 2018 (including a separate standard to control air conditioning system

leakage) represent an average per-vehicle reduction in GHGs of 17 percent for diesel vehicles and 12 percent for gasoline vehicles, compared to a common MY 2010 baseline. EPA also finalized a compliance alternative

whereby manufacturers can phase in different percentages: 15–20–67–67–67–100 percent of the model year 2019 standards stringency level in model years 2014–2015–2016–2017–2018–2019, respectively. This compliance alternative parallels and is equivalent to NHTSA's first alternative described below.

NHTSA's Phase 1 program allows manufacturers to select one of two fuel consumption standard alternatives for model years 2016 and later. The first alternative defines individual gasoline vehicle and diesel vehicle fuel consumption target curves that will not

change for model years 2016–2018, and are equivalent to EPA's 67–67–67–100 percent target curves in model years 2016–2017–2018–2019, respectively. This option is consistent with EISA requirements that NHTSA provide 4 years lead-time and 3 years of stability for standards. See 49 U.S.C. 32902 (k)(3). The second alternative uses target curves that are equivalent to EPA's 40–60–100 percent target curves in model years 2016–2017–2018, respectively. Stringency for the alternatives in Phase 1 was selected by the agencies to allow a manufacturer, through the use of the credit carry-forward and carry-back

provisions that the agencies also finalized, to meet both NHTSA fuel efficiency and EPA GHG emission standards using a single compliance strategy. If a manufacturer cannot meet an applicable standard in a given model year, it may make up its shortfall by over-complying in a subsequent year. NHTSA also allows manufacturers to voluntarily opt into the NHTSA HD pickup and van program in model years 2014 or 2015. For these model years, NHTSA's fuel consumption target curves are equivalent to EPA's target curves. The Phase 1 phase-in options are summarized in Table VI–1.

TABLE VI–1—PHASE 1 STANDARDS PHASE-IN OPTIONS

	2014 %	2015 %	2016 %	2017 %	2018 %	2019 %
EPA Primary Phase-in .....	15	20	40	60	100	100
EPA Compliance Option .....	15	20	67	67	67	100
NHTSA First Option .....	0	0	67	67	67	100
NHTSA Second Option .....	0	0	40	60	100	100

The form and stringency of the Phase 1 standards curves are based on the performance of a set of vehicle, engine, and transmission technologies expected (although not required) to be used to meet the GHG emissions and fuel economy standards for model year 2012–2016 light-duty vehicles, with full consideration of how these technologies are likely to perform in heavy-duty vehicle testing and use. All of these technologies are already in use or have been announced for upcoming model years in some light-duty vehicle models, and some are in use in a portion of HD pickups and vans as well. The technologies include:

- advanced 8-speed automatic transmissions
- aerodynamic improvements
- electro-hydraulic power steering
- engine friction reductions
- improved accessories
- low friction lubricants in powertrain components
- lower rolling resistance tires
- lightweighting
- gasoline direct injection
- diesel aftertreatment optimization
- air conditioning system leakage reduction (for EPA program only)

#### *B. Proposed HD Pickup and Van Standards*

As described in this section, NHTSA and EPA are proposing more stringent MY 2027 and later Phase 2 standards that would be phased in over model years 2021–2027. The agencies are proposing standards based on a year-over-year increase in stringency of 2.5

percent over MYs 2021–2027 for a total increase in stringency for the Phase 2 program of about 16 percent compared to the MY 2018 Phase 1 standard. Note that an individual manufacturer's fleet-wide target may differ from this stringency increase due to changes in vehicle sales mix and changes in work factor. The agencies have analyzed several alternatives which are discussed in this section below and in Section X. In particular, we are requesting comment not only on the proposed standards but also particularly on the Alternative 4 standard which would result in approximately the same Phase 2 program stringency increase of about 16 percent compared to Phase 1 but would do so two years earlier, in MY 2025 rather than in MY 2027. The Alternative 4 phase in from 2021–2025 would be based on a year-over-year increase in stringency of 3.5 percent, as discussed below. While we believe the proposed preferred alternative is feasible in the time frame of this rule, and that Alternative 4 could potentially be feasible, the two phase-in schedules differ in the required adoption rate of advanced technologies for certain high volume vehicle segments. The agencies' analysis essentially shows that the additional lead-time provided by the preferred alternative would allow manufacturers to more fully utilize lower cost technologies thereby reducing the adoption rate of more advanced higher cost technologies such as strong hybrids. As discussed in more detail in C.8 below, both of the considered phase-ins require

comparable penetration rates of several non-hybrid technologies with some approaching 100 percent penetration. However, as discussed below, the additional lead-time provided by Alternative 3 would allow manufacturers more flexibility to fully utilize these non-hybrid technologies to reduce the number of hybrids needed compared to Alternative 4. Alternative 4 would additionally require significant penetration of strong hybridization. We request comments, additional information, data, and feedback to determine the extent to which such adoption would be realistic within the MY 2025 timeframe.

When considering potential Phase 2 standards, the agencies anticipate that the technologies listed above that were considered in Phase 1 will continue to be available in the future if not already applied under Phase 1 standards and that additional technologies will also be available:

- advanced engine improvements for friction reduction and low friction lubricants
- improved engine parasitics, including fuel pumps, oil pumps, and coolant pumps
- valvetrain variable lift and timing
- cylinder deactivation
- direct gasoline injection
- cooled exhaust gas recirculation
- turbo downsizing of gasoline engines
- Diesel engine efficiency improvements
- downsizing of diesel engines
- 8-speed automatic transmissions
- electric power steering

- high efficiency transmission gear boxes and driveline
- further improvements in accessory loads
- additional improvements in aerodynamics and tire rolling resistance
- low drag brakes
- mass reduction
- mild hybridization
- strong hybridization

Sections VI.C. and D below and Section 2 of the Draft RIA provide a detailed analysis of these and other potential technologies for Phase 2, including their feasibility, costs, and effectiveness and projected application rates for reducing fuel consumption and CO<sub>2</sub> emissions when utilized in HD pickups and vans. Sections VI.C and D and Section X also discuss the selection of the proposed standards and the alternatives considered.

In addition to EPA's CO<sub>2</sub> emission standards and NHTSA's fuel consumption standards for HD pickups and vans, EPA in Phase 1 also finalized standards for two additional GHGs—N<sub>2</sub>O and CH<sub>4</sub>, as well as standards for air conditioning-related HFC emissions in the Phase 1 rule. EPA is proposing to continue these standards in Phase 2. Also, consistent with CAA Section 202(a)(1), EPA finalized Phase 1 standards that apply to HD pickups and vans in use and EPA is proposing in-use standards for these vehicles in Phase 2. All of the proposed standards for these HD pickups and vans are discussed in more detail below. Program flexibilities and compliance provisions related to the standards for HD pickups and vans are discussed in Section VI.E.

A relatively small number of HD pickups and vans are sold by vehicle manufacturers as incomplete vehicles, without the primary load-carrying device or container attached. A sizeable subset of these incomplete vehicles, often called cab-chassis vehicles, are sold by the vehicle manufacturers in configurations with complete cabs and many of the components that affect GHG emissions and fuel consumption identical to those on complete pickup truck or van counterparts—including engines, cabs, frames, transmissions, axles, and wheels. The Phase 1 program includes provisions that allow manufacturers to include these incomplete vehicles as well as some Class 4 through 6 vehicles to be regulated under the chassis-based HD pickup and van program (*i.e.* subject to the standards for HD pickups and vans), rather than the vocational vehicle

program.<sup>332</sup> The agencies are proposing to continue allowing such incomplete vehicles the option of certifying under either the heavy duty pickup and van standards or the standards for vocational vehicles.

Phase 1 also includes optional compliance paths for spark-ignition engines identical to engines used in heavy-duty pickups and vans to comply with 2b/3 standards. See 40 CFR 1037.150(m) and 49 CFR 535.5(a)(7). Manufacturers sell such engines as “loose engines” or install these engines in incomplete vehicles that are not cab-complete vehicles. The agencies are not proposing to retain the loose engine provisions for Phase 2. These program elements are discussed above in Section V.E. on vocational vehicles and XIV.A.2 on engines.

NHTSA and EPA request comment on all aspects of the proposed HD pickup and van standards and program elements described below and the alternatives discussed in Section X.

#### (1) Vehicle-Based Standards

For Phase 1, EPA and NHTSA chose to set vehicle-based standards whereby the entire vehicle is chassis-tested. The agencies propose to retain this approach for Phase 2. About 90 percent of Class 2b and 3 vehicles are pickup trucks, passenger vans, and work vans that are sold by the original equipment manufacturers as complete vehicles, ready for use on the road. In addition, most of these complete HD pickups and vans are covered by CAA vehicle emissions standards for criteria pollutants (*i.e.*, they are chassis tested similar to light-duty), expressed in grams per mile. This distinguishes this category from other, larger heavy-duty vehicles that typically have engines covered by CAA engine emission standards for criteria pollutants, expressed in grams per brake horsepower-hour. As a result, Class 2b and 3 complete vehicles share both substantive elements and a regulatory structure much more in common with light-duty trucks than with the other heavy-duty vehicles.

Three of these features in common are especially significant: (1) Over 95 percent of the HD pickups and vans sold in the United States are produced by Ford, General Motors, and Chrysler—three companies with large light-duty vehicle and light-duty truck sales in the United States; (2) these companies typically base their HD pickup and van designs on higher sales volume light-duty truck platforms and technologies,

often incorporating new light-duty truck design features into HD pickups and vans at their next design cycle, and (3) at this time most complete HD pickups and vans are certified to vehicle-based rather than engine-based EPA criteria pollutant and GHG standards. There is also the potential for substantial GHG and fuel consumption reductions from vehicle design improvements beyond engine changes (such as through optimizing aerodynamics, weight, tires, and accessories), and a single manufacturer is generally responsible for both engine and vehicle design. All of these factors together suggest that it is still appropriate and reasonable to base standards on performance of the vehicle as a whole, rather than to establish separate engine and vehicle GHG and fuel consumption standards, as is being done for the other heavy-duty categories. The chassis-based standards approach for complete vehicles was also consistent with NAS recommendations and there was consensus in the public comments on the Phase 1 proposal supporting this approach. For all of these reasons, the agencies continue to believe that establishing chassis-based standards for Class 2b and 3 complete vehicles is appropriate for Phase 2.

#### (a) Work-Based Attributes

In developing the Phase 1 HD rulemaking, the agencies emphasized creating a program structure that would achieve reductions in fuel consumption and GHGs based on how vehicles are used and on the work they perform in the real world. Work-based measures such as payload and towing capability are key among the things that characterize differences in the design of vehicles, as well as differences in how the vehicles will be used. Vehicles in the 2b and 3 categories have a wide range of payload and towing capacities. These work-based differences in design and in-use operation are key factors in evaluating technological improvements for reducing CO<sub>2</sub> emissions and fuel consumption. Payload has a particularly important impact on the test results for HD pickup and van emissions and fuel consumption, because testing under existing EPA procedures for criteria pollutants and the Phase 1 standards is conducted with the vehicle loaded to half of its payload capacity (rather than to a flat 300 lb as in the light-duty program), and the correlation between test weight and fuel use is strong.

Towing, on the other hand, does not directly factor into test weight as nothing is towed during the test. Hence, setting aside any interdependence between towing capacity and payload,

<sup>332</sup> See 76 FR 57259–57260, September 15, 2011 and 78 FR 36374, June 17, 2013.



only the higher curb weight caused by any heavier truck components would play a role in affecting measured test results. However towing capacity can be a significant factor to consider because HD pickup truck towing capacities can be quite large, with a correspondingly large effect on vehicle design.

We note too that, from a purchaser perspective, payload and towing capability typically play a greater role than physical dimensions in influencing purchaser decisions on which heavy-duty vehicle to buy. For passenger vans, seating capacity is of course a major consideration, but this correlates closely with payload weight.

For these reasons, EPA and NHTSA set Phase 1 standards for HD pickups and vans based on a “work factor” attribute that combines vehicle payload capacity and vehicle towing capacity, in lbs, with an additional fixed adjustment for four-wheel drive (4wd) vehicles. This adjustment accounts for the fact that 4wd, critical to enabling many off-road heavy-duty work applications, adds roughly 500 lb to the vehicle weight. The work factor is calculated as follows: 75 percent maximum payload + 25 percent of maximum towing + 375 lbs if 4wd. Under this approach, target GHG and fuel consumption standards are determined for each vehicle with a unique work factor (analogous to a target for each discrete vehicle footprint in the light-duty vehicle rules). These targets will then be production weighted and summed to derive a manufacturer’s annual fleet average standard for its heavy-duty pickups and vans. There was widespread support (and no opposition) for the work factor-based approach to standards and fleet average approach to compliance expressed in the comments we received on the Phase 1 rule. The agencies are proposing to continue using the work factor attribute for the Phase 2 standards and request comments on continuing this approach.

Recognizing that towing is not reflected in the certification test for these vehicles, however, the agencies are requesting comment with respect to the treatment of towing in the work factor, especially for diesel vehicles. More specifically, does using the existing work factor equation create an inappropriate incentive for manufacturers to provide more towing capability than needed for some operators, or a disincentive for manufacturers to develop vehicles with intermediate capability. In other words, does it encourage “surplus” towing capability that has no value to vehicle owners and operators? We recognize that some owners and operators do actually use their vehicles to tow very

heavy loads, and that some owners and operators who rarely use their vehicles to tow heavy loads nonetheless prefer to own vehicles capable of doing so. However, others may never tow such heavy loads and purchase their vehicles for other reasons, such as cargo capacity or off-road capability. Some of these less demanding (in terms of towing) users may choose to purchase gasoline-powered vehicles that are typically less expensive and have lower GCWR values, an indicator of towing capability. However, others could prefer a diesel engine more powerful than today’s gasoline engines but less powerful than the typical diesel engines found in 2b and 3 pickups today. In this context, the agencies are considering (but have not yet evaluated) four possible changes to the work factor and how it is applied. First, the agencies are considering revising the work factor to weight payload by 80 percent and towing by 20 percent. Second, we are considering capping the amount of towing that could be credited in the work factor. For example, the work factors for all vehicles with towing ratings above 15,000 lbs could be calculated based on a towing rating of 15,000 lbs. It is important to be clear that such a provision would not limit the towing capability manufacturers could provide, but would only impact the extent to which the work factor would “reward” towing capability. Third, the agencies are considering changing the shape of the standard curve for diesel vehicles to become more flat at very high work factors. A flatter curve would mean that vehicles with very high work factors would be more similar to vehicles with lower work factors than is the case for the proposed curve. Thus, conceptually, flattening the curves at the high end might be appropriate if we were to determine that these high work factor vehicles actually operate in a manner more like the vehicles with lower work factors. For example, when not towing and when not hauling a full payload, heavy-duty pickup trucks with very different work factors may actually be performing the same amount of work. Finally, we are considering having different work factor formulas for pickups and vans, and are also further considering whether any of other changes should be applied differently to pickups than to vans. We welcome comments on both the extent to which surplus towing may be an issue and whether any of the potential changes discussed above would be appropriate. Commenters supporting such changes are encouraged to also address any

potential accompanying changes. For example, if we reweight the work factor, would other changes to the coefficients defining the target curves be important to ensure that standards remain at the maximum feasible levels. (Commenters should, however, recognize that average requirements will, in any event, depend on fleet mix, and the agencies expect to update estimates of future fleet mix before issuing a final rule).

As noted in the Phase 1 rule, the attribute-based CO<sub>2</sub> and fuel consumption standards are meant to be as consistent as practicable from a stringency perspective. Vehicles across the entire range of the HD pickup and van segment have their respective target values for CO<sub>2</sub> emissions and fuel consumption, and therefore all HD pickups and vans will be affected by the standard. With this attribute-based standards approach, EPA and NHTSA believe there should be no significant effect on the relative distribution of vehicles with differing capabilities in the fleet, which means that buyers should still be able to purchase the vehicle that meets their needs.

#### (b) Standards

The agencies are proposing Phase 2 standards based on analysis performed to determine the appropriate HD pickup and van Phase 2 standards and the most appropriate phase in of those standards. This analysis, described below and in the Draft RIA, considered:

- Projections of future U.S. sales for HD pickup and vans
- the estimates of corresponding CO<sub>2</sub> emissions and fuel consumption for these vehicles
- forecasts of manufacturers’ product redesign schedules
- the technology available in new MY 2014 HD pickups and vans to specify preexisting technology content to be included in the analysis fleet (the fleet of vehicles used as a starting point for analysis) extending through MY 2030
- the estimated effectiveness, cost, applicability, and availability of technologies for HD pickup and vans
- manufacturers’ ability to use credit carry-forward
- the levels of technology that are projected to be added to the analysis fleet through MY 2030 considering improvements needed in order to achieve compliance with the Phase 1 standards (thus defining the reference fleet—*i.e.*, under the No-Action Alternative—relative to which to measure incremental impacts of Phase 2 standards), and
- the levels of technology that are projected to be added to the analysis fleet through MY2030 considering

further improvements needed in order to achieve compliance with standards defining each regulatory (action) alternative for Phase 2.

Based on this analysis, EPA is proposing CO<sub>2</sub> attribute-based target standards shown in Figure VI-3 and Figure VI-4, and NHTSA is proposing the equivalent attribute-based fuel consumption target standards, also shown in Figure VI-3 and Figure VI-4, applicable in model year 2021–2027. As shown in these tables, these standards would be phased in year-by-year commencing in MY 2021. The agencies are not proposing to change the standards for 2018–2020 and therefore the standards would remain stable at the MY 2018 Phase 1 levels for MYs 2019 and 2020. EISA requires four years of lead-time and three years stability for NHTSA standards and this period of lead-time and stability for 2018–2020 is consistent with the EISA requirements. For MYs 2021–2027, the agencies are proposing annual reductions in the standards as the primary phase-in of the Phase 2 standards. The proposed standards become 16 percent more stringent overall between MY 2020 and MY 2027. This approach to the Phase 2 standards as a whole can be considered a phase-in or implementation schedule of the proposed MY 2027 standards (which, as noted, would apply thereafter unless and until amended).

For EPA, Section 202(a) provides the Administrator with the authority to establish standards, and to revise those standards “from time to time,” thus providing the Administrator with considerable discretion in deciding when to revise the Phase 1 MY 2018 standards. EISA requires that NHTSA provide four full model years of regulatory lead time and three full model years of regulatory stability for its fuel economy standards. See 49 U.S.C. 32902(k)(3). Consistent with these authorities, the agencies are proposing more stringent standards beginning with MY 2021 that consider the level of technology we predict can be applied to new vehicles in the 2021 MY. EPA believes the proposed Phase 2 standards are consistent with CAA requirements regarding lead-time, reasonable cost, and feasibility, and safety. NHTSA believes the proposed Phase 2 standards are the maximum feasible under EISA. Manufacturers in the HD pickup and van market segment have relatively few


vehicle lines and redesign cycles are typically longer compared to light-duty vehicles. Also, the timing of vehicle redesigns differs among manufacturers. To provide lead time needed to accommodate these longer redesign cycles, the proposed Phase 2 GHG standards would not reach their highest stringency until 2027. Although the proposed standards would become more stringent over time between MYs 2021 and 2027, the agencies expect manufacturers will likely strive to make improvements as part of planned redesigns, such that some model years will likely involve significant advances, while other model years will likely involve little change. The agencies also expect manufacturers to use program flexibilities (e.g., credit carry-forward provisions and averaging, banking, and trading provisions) to help balance compliance costs over time (including by allowing needed changes to align with redesign schedules). The agencies are proposing to provide stable standards in MYs 2019–2020 in order to provide necessary lead time for Phase 2. However, for some manufacturers, the transition to the Phase 2 standards may begin earlier (e.g., as soon as MY 2017) depending on their vehicle redesign cycles. Although standards are not proposed to change in MYs 2019–2020, manufacturers may introduce additional technologies in order to carry forward corresponding improvements and perhaps generate credits under the 5 year credit carry-forward provisions established in Phase 1 and proposed to continue for Phase 2. Sections VI.C. and D below provides additional discussion of vehicle redesign cycles and the feasibility of the proposed standards.

While it is unlikely that there is a phase-in approach that would equally fit with all manufacturers’ unique product redesign schedules, the agencies recognize that there are other ways the Phase 2 standards could be phased in and request comments on other possible approaches. One alternative approach would be to phase in the standards in a few step changes, for example in MYs 2021, 2024 and 2027. Under this example, if the step changes on the order of 5 percent, 10 percent, and 16 percent improvements from the MY 2020 baseline in MYs 2021, 2024 and 2027 respectively, the program would provide CO<sub>2</sub> reductions and fuel improvements roughly equivalent to the proposed approach.


Among the factors the agencies would consider in assessing a different phase-in than that proposed would be impacts on lead time, feasibility, cost, CO<sub>2</sub> reductions and fuel consumption improvements. The agencies request that commenters consider all of these factors in their recommendations on phase-in.

As in Phase 1, the proposed Phase 2 standards would be met on a production-weighted fleet average basis. No individual vehicle would have to meet a particular fleet average standard. Nor would all manufacturers have to meet numerically identical fleet average requirement. Rather, each manufacturer would have its own unique fleet average requirement based on the production-weighted average of the heavy duty pickups and vans it chooses to produce. Moreover, averaging, banking, and trading provisions, just alluded to and discussed further below, would provide significant additional compliance flexibility in implementing the standards. It is important to note, however, that while the standards would differ numerically from manufacturer to manufacturer, effective stringency should be essentially the same for each manufacturer.

Also, as with the Phase 1 standards, the agencies are proposing separate Phase 2 targets for gasoline-fueled (and any other Otto-cycle) vehicles and diesel-fueled (and any other diesel-cycle) vehicles. The targets would be used to determine the production-weighted fleet average standards that apply to the combined diesel and gasoline fleet of HD pickups and vans produced by a manufacturer in each model year. The above-proposed stringency increase for Phase 2 applies equally to the separate gasoline and diesel targets. The agencies considered different rates of increase for the gasoline and diesel targets in order to more equally balance compliance burdens across manufacturers with varying gasoline/diesel fleet mixes. However, at least among major HD pickup and van manufacturers, our analysis suggests limited potential for such optimization, especially considering uncertainties involved with manufacturers’ future fleet mix. The agencies have thus maintained the equivalent rates of stringency increase. The agencies invite comment on this element.

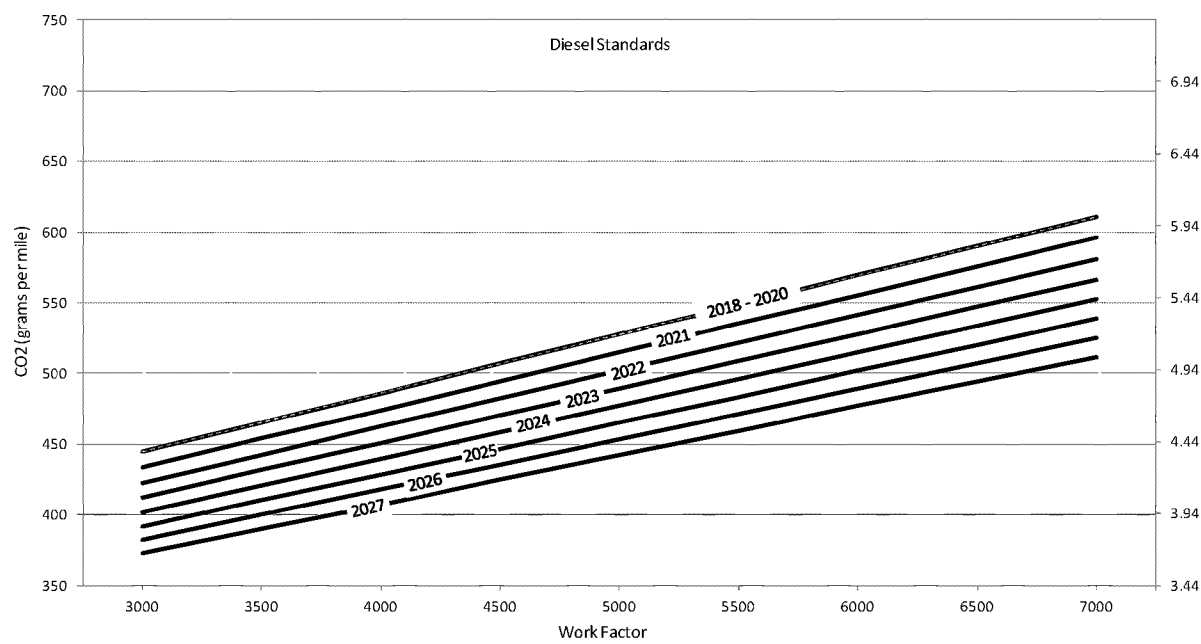

**Figure VI-3 EPA Proposed CO<sub>2</sub> Target Standards and NHTSA Proposed Fuel Consumption Target Standards for Diesel HD Pickups and Vans**

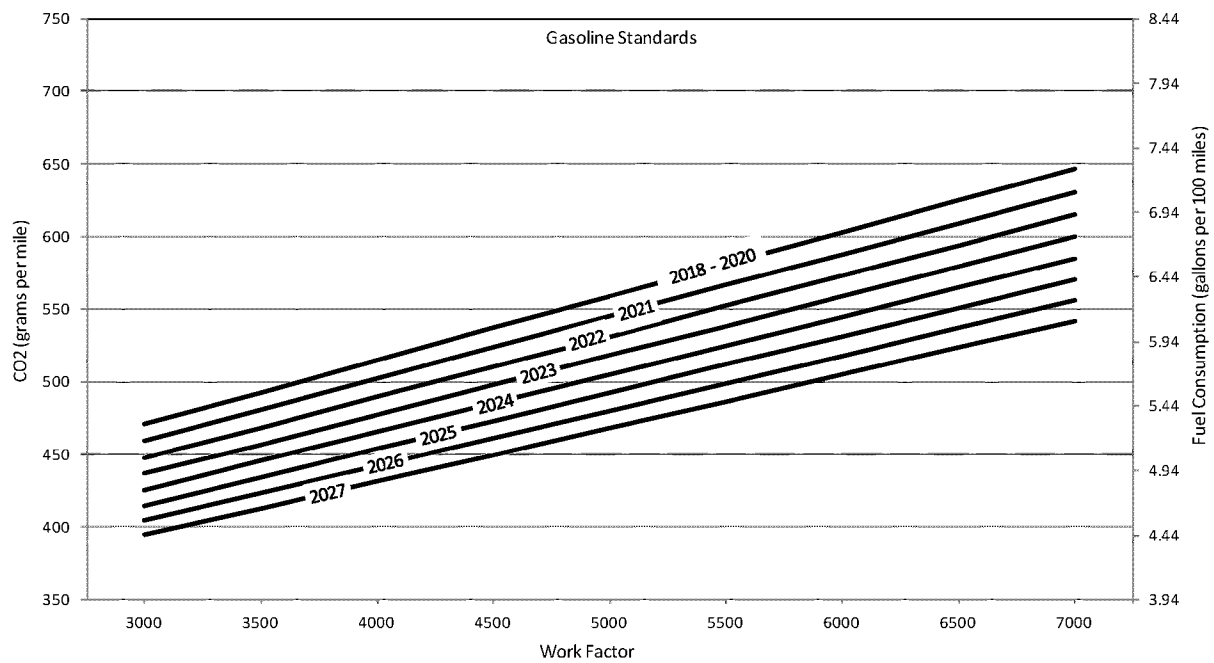

**Figure VI-4 EPA Proposed CO<sub>2</sub> Target Standards and NHTSA Proposed Fuel Consumption Target Standards for Gasoline HD Pickups and Vans**

Described mathematically, EPA's and NHTSA's proposed target standards are defined by the following formulas:

$$\text{EPA CO}_2 \text{ Target (g/mile)} = \frac{[a \times \text{WF}] + b}{b}$$

$$\text{NHTSA Fuel Consumption Target (gallons/100 miles)} = [c \times \text{WF}] + d$$

Where:

$$\text{WF} = \text{Work Factor} = \frac{[0.75 \times (\text{Payload Capacity} + \text{xwd})] + [0.25 \times \text{Towing Capacity}]}{\text{Payload Capacity} + \text{xwd}}$$

$$\text{Payload Capacity} = \text{GVWR (lb)} - \text{Curb Weight (lb)}$$

xwd = 500 lb if the vehicle is equipped with 4wd, otherwise equals 0 lb.

$$\text{Towing Capacity} = \text{GCWR (lb)} - \text{GVWR (lb)}$$

Coefficients a, b, c, and d are taken from Table VI-2.

TABLE VI-2—PROPOSED PHASE 2 COEFFICIENTS FOR HD PICKUP AND VAN TARGET STANDARDS

Model year	a	b	c	d
<b>Diesel Vehicles</b>				
2018–2020 <sup>a</sup>	0.0416	320	0.0004086	3.143
2021	0.0406	312	0.0003988	3.065
2022	0.0395	304	0.0003880	2.986
2023	0.0386	297	0.0003792	2.917
2024	0.0376	289	0.0003694	2.839
2025	0.0367	282	0.0003605	2.770
2026	0.0357	275	0.0003507	2.701
2027 and later	0.0348	268	0.0003418	2.633
<b>Gasoline Vehicles</b>				
2018–2020 <sup>a</sup>	0.044	339	0.0004951	3.815
2021	0.0429	331	0.0004827	3.725
2022	0.0418	322	0.0004703	3.623
2023	0.0408	314	0.0004591	3.533
2024	0.0398	306	0.0004478	3.443
2025	0.0388	299	0.0004366	3.364
2026	0.0378	291	0.0004253	3.274
2027 and later	0.0369	284	0.0004152	3.196

**Note:**

<sup>a</sup>Phase 1 primary phase-in coefficients. Alternative phase-in coefficients are different in MY2018 only.

As noted above, the standards are not proposed to change from the final Phase 1 standards for MYs 2018–2020. The MY 2018–2020 standards are shown in the Figures and tables above for reference.

NHTSA and EPA have also analyzed regulatory alternatives to the proposed standards, as discussed in Sections VI.C and D and Section X. below. The agencies request comments on all of the alternatives analyzed for the proposal, but request comments on Alternative 4 in particular. The agencies believe Alternative 4 has the potential to be the maximum feasible alternative; however, based on the evidence currently before us, EPA and NHTSA have outstanding questions regarding relative risks and benefits of Alternative 4 due to the timeframe envisioned by that

alternative. Alternative 4 would provide less lead time for the complete phase-in of the proposed Phase 2 standards based on an annual improvement of 3.5 percent per year in MYs 2021–2025 compared to the proposed Alternative 3 per year improvement of 2.5 percent in MYs 2021–2027. The CO<sub>2</sub> and fuel consumption attribute-based target standards for the Alternative 4 phase-in are shown in Figure VI-5 and Figure VI-6 below. As the target curves for Alternative 4 show in comparison to the target curves shown above for the proposed Alternative 3, the final Phase 2 standards would result in essentially the same level of stringency under either alternative. However, the Phase 2 standards would be fully implemented two years earlier, in MY 2025, under Alternative 4. The agencies are seriously

considering whether this Alternative 4 (*i.e.*, the proposed standards but with two years less lead-time) would be realistic and feasible, as described in Sections VI.C and D, Section X, and in the Draft RIA Chapter 11. Alternative 4 is predicated on shortened lead time that would result in accelerated and in some cases higher adoption rates of the same technologies on which the proposed Alternative 3 is predicated. The agencies request comments, data, and information that would help inform determination of the maximum feasible (for NHTSA) and appropriate (for EPA) stringency for HD pickups and vans and are particularly interested in information and data related to the expected adoption rates of different emerging technologies, such as mild and strong hybridization.

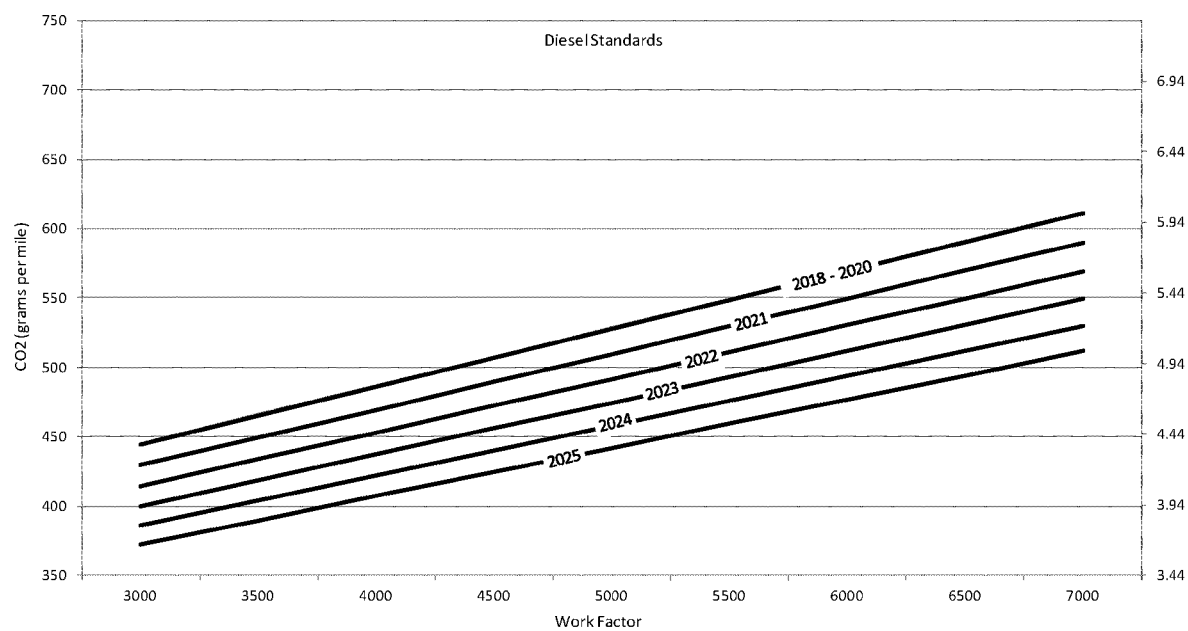


Figure VI-5 Alternative 4 EPA CO<sub>2</sub> Target Standards and NHTSA Fuel Consumption Target Standards for Diesel HD Pickups and Vans

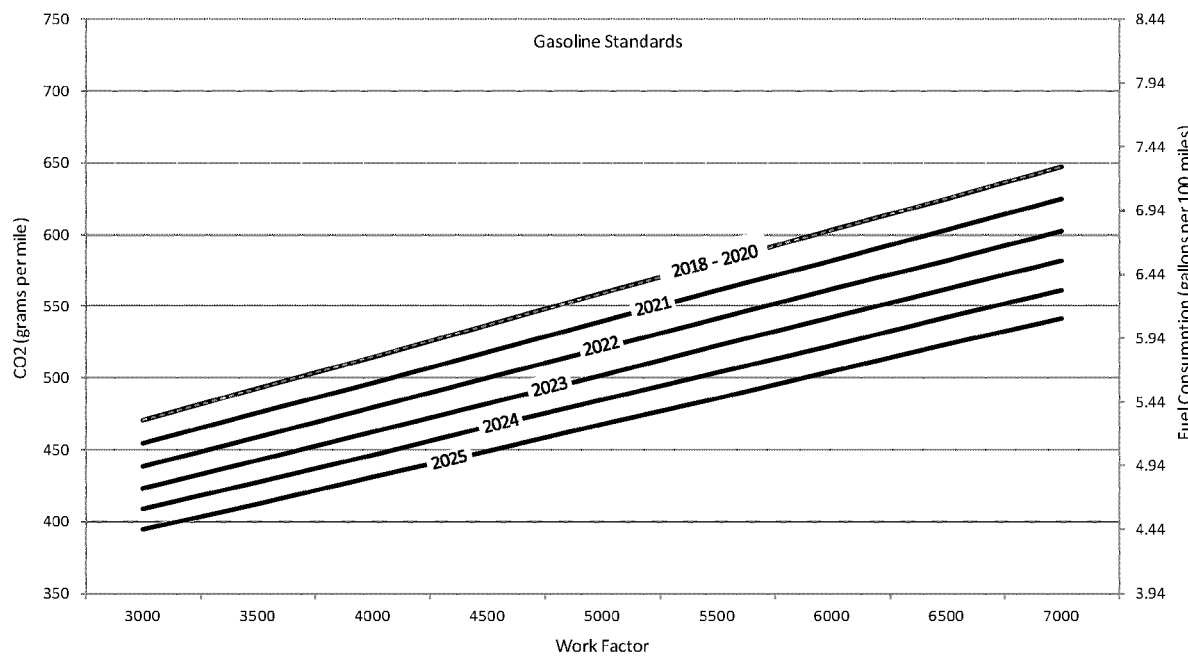


Figure VI-6 Alternative 4 EPA CO<sub>2</sub> Target Standards and NHTSA Fuel Consumption Target Standards for Gasoline HD Pickups and Vans

As with Phase 1 standards, to calculate a manufacturer's HD pickup and van fleet average standard, the agencies are proposing that separate target curves be used for gasoline and diesel vehicles. The agencies' proposed

standards result in approximately 16 percent reductions in CO<sub>2</sub> and fuel consumption for both diesel and gasoline vehicles relative to the MY 2018 Phase 1 standards for HD pickup trucks and vans. These target reductions are based on the agencies' assessment of the feasibility of incorporating technologies (which differ for gasoline and diesel powertrains) in the 2021–2027 model years, and on the differences in relative efficiency in the current gasoline and diesel vehicles.

The agencies generally prefer to set standards that do not distinguish between fuel types where technological or market-based reasons do not strongly argue otherwise. However, as with Phase 1, we continue to believe that fundamental differences between spark ignition and compression ignition engines warrant unique fuel standards, which is also important in ensuring that our program maintains product choices available to vehicle buyers. In fact, gasoline and diesel fuel behave so differently in the internal combustion engine that they have historically required unique test procedures, emission control technologies and emission standards. These technological differences between gasoline and diesel engines for GHGs and fuel consumption exist presently and will continue to exist after Phase 1 and through Phase 2 until advanced research evolves the gasoline fueled engine to diesel-like efficiencies. This will require significant technological breakthroughs currently in early stages of research such as homogeneous charge compression ignition (HCCI) or similar concepts. Because these technologies are still in the early research stages, we believe the proposed separate fuel type standards are appropriate in the timeframe of this rule to protect for the availability of both gasoline and diesel engines and will result in roughly equivalent redesign burdens for engines of both fuel types as evidenced by feasibility and cost analysis in RIA Chapter 10. The agencies request comment on the level of stringency of the proposed standards, the continued separate targets for gasoline and diesel HD pickups and vans, and the continued use of the work-based attribute approach described above.

The proposed NHTSA fuel consumption target curves and EPA GHG target curves are equivalent. The agencies established the target curves using the direct relationship between fuel consumption and CO<sub>2</sub> using conversion factors of 8,887 g CO<sub>2</sub>/gallon for gasoline and 10,180 g CO<sub>2</sub>/gallon for diesel fuel.

It is expected that measured performance values for CO<sub>2</sub> will generally be equivalent to fuel consumption. However, Phase 1 established a provision that EPA is not proposing to change for Phase 2 that allows manufacturers, if they choose, to use CO<sub>2</sub> credits to help demonstrate compliance with N<sub>2</sub>O and CH<sub>4</sub> emissions standards, by expressing any N<sub>2</sub>O and CH<sub>4</sub> under compliance in terms of their CO<sub>2</sub>-equivalent and applying CO<sub>2</sub> credits as needed. For test families that do not use this compliance alternative, the measured performance values for CO<sub>2</sub> and fuel consumption will be equivalent because the same test runs and measurement data will be used to determine both values, and calculated fuel consumption will be based on the same conversion factors that are used to establish the relationship between the CO<sub>2</sub> and fuel consumption target curves (8,887 g CO<sub>2</sub>/gallon for gasoline and 10,180 g CO<sub>2</sub>/gallon for diesel fuel). For manufacturers that choose to use EPA provision for CO<sub>2</sub> credit use in demonstrating N<sub>2</sub>O and CH<sub>4</sub> compliance, compliance with the CO<sub>2</sub> standard will not be directly equivalent to compliance with the NHTSA fuel consumption standard.

(2) What are the HD Pickup and Van Test Cycles and Procedures?

The Phase 1 program established testing procedures for HD pickups and vans and NHTSA and EPA are not proposing to change these testing protocols. The vehicles would continue to be tested using the same heavy-duty chassis test procedures currently used by EPA for measuring criteria pollutant emissions from these vehicles, but with the addition of the highway fuel economy test cycle (HFET). These test procedures are used by manufacturers for certification and emissions compliance demonstrations and by the agencies for compliance verification and enforcement. Although the highway cycle driving pattern is identical to that of the light-duty test, other test parameters for running the HFET, such as test vehicle loaded weight, are identical to those used in running the current EPA Federal Test Procedure for complete heavy-duty vehicles. Please see Section II.C (2) of the Phase 1 preamble (76 FR 57166) for a discussion of how HD pickups and vans would be tested.

One item that the agencies are considering to change is how vehicles are categorized into test weight bins. Under the current test procedures, vehicles are tested at 500 lb increments of inertial weight classes when testing at or above 5500 lbs test weight. For

example, all vehicles having a calculated test weight basis of 11,251 to 11,750 lbs would be tested 11,500 lbs (*i.e.*, the midpoint of the range). However, for some vehicles, the existence of these bins and the large intervals between bins may reduce or eliminate the incentive for mass reduction for some vehicles, as a vehicle may require significant mass reduction before it could switch from one test weight bin to the next lower bin. For other vehicles, these bins may unduly reward relatively small reductions of vehicle mass, as a vehicle's mass may be only slightly greater than that needed to be assigned a 500-pound lighter inertia weight class. For example, for a vehicle with a calculated test weight basis of 11,700 lbs, a manufacturer would receive no regulatory benefit for reducing the vehicle weight by 400 lbs, because the vehicle would stay within the same weight bracket. The agencies do recognize that the test weight bins allow for some reduction in testing burden as many vehicles can be grouped together under a single test. For Phase 2, the agencies seek comment on whether the test weight bins should be changed in order to allow for more realistic testing of HD pickups and vans and better capture of the improvements due to mass reduction. Some example changes could include reducing the five hundred pound interval between bins to smaller intervals similar to those allowed for vehicles tested below 5,500 lbs. test weight, or allowing any test weight value that is not fixed to a particular test weight bin. The latter scenario would still allow some grouping of vehicles to reduce test burden, and the agencies also seek comment on how vehicles would be grouped and how the test weight of this group of vehicles should be selected.

We further seek comment as to whether there may be a more appropriate method such as allowing analytical adjustment of the CO<sub>2</sub> levels and fuel consumption within a vehicle weight class to more precisely account for the individual vehicle models performance. For example, could an equation like the one specified in 40 CFR 1037.104(g) for analytically adjusting CO<sub>2</sub> emissions be used (note that this is proposed to be redesignated as 40 CFR 86.1819–14(g)). The agencies are specifically considering an approach in which vehicles are tested in the same way with the same test weights, but manufacturers have the option to either accept the emission results as provided under the current regulations, or choose to adjust the emissions based on the actual test weight basis (actual curb plus

half payload) instead of the equivalent test weight for the 500 test weight interval. Should the agencies finalize this as an option, manufacturers choosing to adjust their emissions would be required to do so for all of their vehicles, and not just for those with test weights below the midpoint of the range.

### (3) Fleet Average Standards

NHTSA and EPA are proposing to retain the fleet average standards approach finalized in the Phase 1 rule and structurally similar to light-duty Corporate Average Fuel Economy (CAFE) and GHG standards. The fleet average standard for a manufacturer is a production-weighted average of the work factor-based targets assigned to unique vehicle configurations within each model type produced by the manufacturer in a model year. Each manufacturer would continue to have an average GHG requirement and an average fuel consumption requirement unique to its new HD pickup and van fleet in each model year, depending on the characteristics (payload, towing, and drive type) of the vehicle models produced by that manufacturer, and on the U.S.-directed production volume of each of those models in that model year. Vehicle models with larger payload/towing capacities and/or four-wheel drive have individual targets at numerically higher CO<sub>2</sub> and fuel consumption levels than less capable vehicles, as discussed in Section VI.B(1).

The fleet average standard with which the manufacturer must comply would continue to be based on its final production figures for the model year, and thus a final assessment of compliance would occur after production for the model year ends. The assessment of compliance also must consider the manufacturer's use of carry-forward and carry-back credit provisions included in the averaging, banking, and trading program. Because compliance with the fleet average standards depends on actual test group production volumes, it is not possible to determine compliance at the time the manufacturer applies for and receives an (initial) EPA certificate of conformity for a test group. Instead, at certification the manufacturer would demonstrate a level of performance for vehicles in the test group, and make a good faith demonstration that its fleet, regrouped by unique vehicle configurations within each model type, is expected to comply with its fleet average standard when the model year is over. EPA will issue a certificate for the vehicles covered by the test group based on this

demonstration, and will include a condition in the certificate that if the manufacturer does not comply with the fleet average, then production vehicles from that test group will be treated as not covered by the certificate to the extent needed to bring the manufacturer's fleet average into compliance. As in the parallel program for light-duty vehicles, additional "model type" testing will be conducted by the manufacturer over the course of the model year to supplement the initial test group data. The emissions and fuel consumption levels of the test vehicles will be used to calculate the production-weighted fleet averages for the manufacturer, after application of the appropriate deterioration factor to each result to obtain a full useful life value. Please see Section II.C (3)(a) of the Phase 1 preamble (76 FR 57167) for further discussion of the fleet average approach for HD pickups and vans.

### (4) In-Use Standards

Section 202(a)(1) of the CAA specifies that EPA set emissions standards that are applicable for the useful life of the vehicle. EPA is proposing to continue the in-use standards approach for individual vehicles that EPA finalized for the Phase 1 program. NHTSA did not adopt Phase 1 in-use standards and is not proposing in-use standards for Phase 2. For the EPA program, compliance with the in-use standard for individual vehicles and vehicle models does not impact compliance with the fleet average standard, which will be based on the production-weighted average of the new vehicles. Vehicles that fail to meet their in-use emission standards would be subject to recall to correct the noncompliance. NHTSA also proposes to adopt EPA's useful life requirements to ensure manufacturers consider in the design process the need for fuel efficiency standards to apply for the same duration and mileage as EPA standards. NHTSA seeks comment on the appropriateness of seeking civil penalties for failure to comply with its fuel efficiency standards in these instances. NHTSA would limit such penalties to situations in which it determined that the vehicle or engine manufacturer failed to comply with the standards.

As with Phase 1, EPA proposes that the in-use Phase 2 standards for HD pickups and vans be established by adding an adjustment factor to the full useful life emissions used to calculate the GHG fleet average. EPA proposes that each model's in-use CO<sub>2</sub> standard be the model-specific level used in calculating the fleet average, plus 10 percent. No adverse comments were

received on this provision during the Phase 1 rulemaking. Please see Section II.C (3)(b) of the Phase 1 preamble (76 FR 57167) for further discussion of in-use standards for HD pickups and vans.

For Phase 1, EPA aligned the useful life for GHG emissions with the useful life that was in place for criteria pollutants: 11 years or 120,000 miles, whichever occurs first (40 CFR 86.1805–04(a)). Since the Phase 1 rule was finalized, EPA updated the useful life for criteria pollutants as part of the Tier 3 rulemaking.<sup>333</sup> The new useful life implemented for Tier 3 is 150,000 miles or 15 years, whichever occurs first. EPA and NHTSA propose that the useful life for GHG emissions and fuel consumption also be updated to 150,000 miles/15 years starting in MY 2021 when the Phase 2 standards begin so that the useful life remains aligned for GHG and criteria pollutant standards long term. With the relatively flat deterioration generally associated with CO<sub>2</sub> and fuel consumption and the proposed in-use standard adjustment factor discussed above, the agencies do not believe the proposed change in useful life would significantly affect the feasibility of the proposed Phase 2 standards.<sup>334</sup> The agencies request comments on the proposed change to useful life.

### (5) Other GHG Standards for HD Pickups and Vans

This section addresses greenhouse gases other than CO<sub>2</sub>. Note that since these are greenhouse gases not directly related to fuel consumption, NHTSA does not have equivalent standards.

#### (a) Nitrous Oxide (N<sub>2</sub>O) and Methane (CH<sub>4</sub>)

In the Phase 1 rule, EPA established emissions standards for HD pickups and vans for both nitrous oxide (N<sub>2</sub>O) and methane (CH<sub>4</sub>). Similar to the CO<sub>2</sub> standard approach, the N<sub>2</sub>O and CH<sub>4</sub> emission levels of a vehicle are based on a composite of the light-duty FTP and HFET cycles with the same 55 percent city weighting and 45 percent highway weighting. The N<sub>2</sub>O and CH<sub>4</sub> standards were both set by EPA at 0.05 g/mile. Unlike the CO<sub>2</sub> standards, averaging between vehicles is not allowed. The standards are designed to prevent increases in N<sub>2</sub>O and CH<sub>4</sub> emissions

<sup>333</sup> 79 FR 23492, April 28, 2014 and 40 CFR 86.1805–17.

<sup>334</sup> As discussed below in Section VI.D.1., EPA and NHTSA are proposing an adjustment factor of 1.25 for banked credits that are carried over from Phase 1 to Phase 2. The useful life is factored into the credits calculation and without the adjustment factor the change in useful life would effectively result in a discount of those carry-over credits.

from current levels, *i.e.*, a no-backsliding standard. EPA is not proposing to change the N<sub>2</sub>O or CH<sub>4</sub> standards or related provisions established in the Phase 1 rule. Please see Phase 1 preamble Section II.E. (76 FR 57188–57193) for additional discussion of N<sub>2</sub>O and CH<sub>4</sub> emissions and standards.

Across both current gasoline- and diesel-fueled heavy-duty vehicle designs, emissions of CH<sub>4</sub> and N<sub>2</sub>O are relatively low and the intent of the cap standards is to ensure that future vehicle technologies or fuels do not result in an increase in these emissions. Given the global warming potential (GWP) of CH<sub>4</sub>, the 0.05 g/mile cap standard is equivalent to about 1.25 g/mile CO<sub>2</sub>, which is much less than 1 percent of the overall GHG emissions of most HD pickups and vans.<sup>335</sup> The effectiveness of oxidation of CH<sub>4</sub> using a three-way or diesel oxidation catalyst is limited by the activation energy, which tends to be higher where the number of carbon atoms in the hydrocarbon molecule is low and thus CH<sub>4</sub> is very stable. At this time we are not aware of any technologies beyond the already present catalyst systems which are highly effective at oxidizing most hydrocarbon species for gasoline and diesel fueled engines that would further lower the activation energy across the catalyst or increase the energy content of the exhaust (without further increasing fuel consumption and CO<sub>2</sub> emissions) to further reduce CH<sub>4</sub> emissions at the tailpipe. We note that we are not aware of any new technologies that would allow us to adopt more stringent CH<sub>4</sub> and N<sub>2</sub>O standards at this time. The CH<sub>4</sub> standard remains an important backstop to prevent future increases in CH<sub>4</sub> emissions.

N<sub>2</sub>O is emitted from gasoline and diesel vehicles mainly during specific catalyst temperature conditions conducive to N<sub>2</sub>O formation. The 0.05 g/mile standard, which translates to a CO<sub>2</sub>-equivalent value of 14.9 g/mile, ensures that systems are not designed in a way that emphasizes efficient NO<sub>x</sub> control while allowing the formation of significant quantities of N<sub>2</sub>O. The Phase 1 N<sub>2</sub>O standard of 0.05 g/mile for pickups and vans was finalized knowing that it is more stringent than the Phase 1 N<sub>2</sub>O engine standard of 0.10 g/hp-hr, currently being reevaluated as discussed in Section II.D.3. EPA continues to believe that the 0.05 g/mile standard provides the necessary assurance that N<sub>2</sub>O will not significantly

increase, given the mix of gasoline and diesel fueled engines in this market and the upcoming implementation of the light-duty and heavy-duty (up to 14,000 lbs. GVWR) Tier 3 NO<sub>x</sub> standards. EPA knows of no technologies that would lower N<sub>2</sub>O emissions beyond the control provided by the precise emissions control systems already being implemented to meet EPA's criteria pollutant standards. Therefore, EPA continues to believe the 0.05 g/mile N<sub>2</sub>O standard remains appropriate.

If a manufacturer is unable to meet the N<sub>2</sub>O or CH<sub>4</sub> cap standards, the EPA program allows the manufacturer to comply using CO<sub>2</sub> credits. In other words, a manufacturer may offset any N<sub>2</sub>O or CH<sub>4</sub> emissions above the standard by taking steps to further reduce CO<sub>2</sub>. A manufacturer choosing this option would use GWPs to convert its measured N<sub>2</sub>O and CH<sub>4</sub> test results that are in excess of the applicable standards into CO<sub>2</sub>eq to determine the amount of CO<sub>2</sub> credits required. For example, a manufacturer would use 25 Mg of positive CO<sub>2</sub> credits to offset 1 Mg of negative CH<sub>4</sub> credits or use 298 Mg of positive CO<sub>2</sub> credits to offset 1 Mg of negative N<sub>2</sub>O credits.<sup>336</sup> By using the GWP of N<sub>2</sub>O and CH<sub>4</sub>, the approach recognizes the inter-correlation of these compounds in impacting global warming and is environmentally neutral for demonstrating compliance with the individual emissions caps. Because fuel conversion manufacturers certifying under 40 CFR part 85, subpart F, do not participate in ABT programs, EPA included in the Phase 1 rule a compliance option for fuel conversion manufacturers to comply with the N<sub>2</sub>O and CH<sub>4</sub> standards that is similar to the credit program described above. See 76 FR 57192. The compliance option will allow conversion manufacturers, on an individual engine family basis, to convert CO<sub>2</sub> over compliance into CO<sub>2</sub> equivalents (CO<sub>2</sub> eq) of N<sub>2</sub>O and/or CH<sub>4</sub> that can be subtracted from the CH<sub>4</sub> and N<sub>2</sub>O measured values to demonstrate compliance with CH<sub>4</sub> and/or N<sub>2</sub>O standards. EPA did not include similar provisions allowing over compliance with the N<sub>2</sub>O or CH<sub>4</sub> standards to serve as a means to generate CO<sub>2</sub> credits because the CH<sub>4</sub> and N<sub>2</sub>O standards are cap standards representing levels that all but the worst vehicles should already be well below. Allowing credit generation against such cap standard would provide a windfall credit without any true GHG reduction. EPA proposes to maintain these provisions for Phase 2 as they provide important flexibility

without reducing the overall GHG benefits of the program.

EPA is requesting comment on updating GWPs used in the calculation of credits discussed above. Please see the full discussion of this issue and request for comments provided in Sections II.D and XI.D.

#### (b) Air Conditioning Related Emissions

Air conditioning systems contribute to GHG emissions in two ways—direct emissions through refrigerant leakage and indirect exhaust emissions due to the extra load on the vehicle's engine to provide power to the air conditioning system. HFC refrigerants, which are powerful GHG pollutants, can leak from the A/C system. This includes the direct leakage of refrigerant as well as the subsequent leakage associated with maintenance and servicing, and with disposal at the end of the vehicle's life.<sup>337</sup> Currently, the most commonly used refrigerant in automotive applications—R134a, has a high GWP. Due to the high GWP of R134a, a small leakage of the refrigerant has a much greater global warming impact than a similar amount of emissions of CO<sub>2</sub> or other mobile source GHGs.

In Phase 1, EPA finalized low leakage requirement for all air conditioning systems installed in 2014 model year and later HDVs, with the exception of Class 2b–8 vocational vehicles. As discussed in Section V.B.3, EPA is proposing to extend leakage standards to vocational vehicles for Phase 2. For air conditioning systems with a refrigerant capacity greater than 733 grams, EPA finalized a leakage standard which is a “percent refrigerant leakage per year” to assure that high-quality, low-leakage components are used in each air conditioning system design. EPA finalized a standard of 1.50 percent leakage per year for heavy-duty pickup trucks and vans and Class 7 and 8 tractors. See Section II.E.5. of Phase 1 preamble (76 FR 57194–57195) for further discussion of the A/C leakage standard.

In addition to use of leak-tight components in air conditioning system design, manufacturers could also decrease the global warming impact of leakage emissions by adopting systems that use alternative, lower global warming potential (GWP) refrigerants, to replace the refrigerant most commonly used today, HFC–134a (R–134a). The potential use of alternative refrigerants in HD vehicles and EPA's proposed revisions to 40 CFR 1037.115 so that use

<sup>335</sup> N<sub>2</sub>O has a GWP of 298 and CH<sub>4</sub> has a GWP of 25 according to the IPCC AR4.

<sup>336</sup> N<sub>2</sub>O has a GWP of 298 and CH<sub>4</sub> has a GWP of 25 according to the IPCC AR4.

<sup>337</sup> The U.S. EPA has reclamation requirements for refrigerants in place under Title VI of the Clean Air Act.



of certain lower GWP refrigerants would cause an air conditioning system in a HD vehicle to be deemed to comply with the low leakage standard is discussed in Section I.F. above.

In addition to direct emissions from refrigerant leakage, air conditioning systems also create indirect exhaust emissions due to the extra load on the vehicle's engine to provide power to the air conditioning system. These indirect emissions are in the form of the additional CO<sub>2</sub> emitted from the engine when A/C is being used due to the added loads. Unlike direct emissions which tend to be a set annual leak rate not directly tied to usage, indirect emissions are fully a function of A/C usage. These indirect CO<sub>2</sub> emissions are associated with air conditioner efficiency, since (as just noted) air conditioners create load on the engine. See 74 FR 49529. In Phase 1, the agencies did not set air conditioning efficiency standards for vocational vehicles, combination tractors, or heavy-duty pickup trucks and vans. The CO<sub>2</sub> emissions due to air conditioning systems in these heavy-duty vehicles were estimated to be minimal compared to their overall emissions of CO<sub>2</sub>. This continues to be the case. For this reason, EPA is not proposing to establish standards for A/C efficiency for Phase 2.

NHTSA and EPA request comments on all aspects of the proposed HD pickup and van standards and program elements described in this section.

### *C. Feasibility of Pickup and Van Standards*

EPCA and EISA require NHTSA to "implement a commercial medium- and heavy-duty on-highway vehicle and work truck fuel efficiency improvement program designed to achieve the maximum feasible improvement" and to establish corresponding fuel consumption standards "that are appropriate, cost-effective, and technologically feasible."<sup>338</sup> Section 202(a)(1) and (2) of the Clean Air Act require EPA to establish standards for emissions of pollutants from new motor vehicles and engines which emissions cause or contribute to air pollution which may reasonably be anticipated to endanger public health or welfare, which include GHGs. See section I.E. above. Under section 202(a)(1) and (2), EPA considers such issues as technology effectiveness, its cost (both per vehicle, per manufacturer, and per consumer), the lead time necessary to implement the technology, and based on this the feasibility and practicability of potential standards; the impacts of

potential standards on emissions reductions of both GHGs and non-GHG emissions; the impacts of standards on oil conservation and energy security; the impacts of standards on fuel savings by customers; the impacts of standards on the truck industry; other energy impacts; as well as other relevant factors such as impacts on safety.

As part of the feasibility analysis of potential standards for HD pickups and vans, the agencies have applied DOT's CAFE Compliance and Effects Modeling System (sometimes referred to as "the CAFE model" or "the Volpe model"), which DOT's Volpe National Transportation Systems Center (Volpe Center) developed, maintains, and applies to support NHTSA CAFE analyses and rulemakings.<sup>339</sup> The agencies used this model to determine the range of stringencies that might be achievable through the use of technology that is projected to be available in the Phase 2 time frame. From these runs, the agencies identified the stringency level that would be technology-forcing (*i.e.* reflect levels of stringency based on performance of merging as well as currently available control technologies), but leave manufacturers the flexibility to adopt varying technology paths for compliance and allow adequate lead time to develop, test, and deploy the range of technologies.

As noted in Section I and discussed further below, the analysis considers two reference cases for HD pickups and vans, a flat baseline (designated Alternative 1a) where no improvements are modeled beyond those needed to meet Phase 1 standards and a dynamic baseline (designated Alternative 1b) where certain cost-effective technologies (*i.e.*, those that payback within a 6 month period) are assumed to be applied by manufacturers to improve fuel efficiency beyond the Phase 1 requirements in the absence of new Phase 2 standards. NHTSA considered its primary analysis to be based on the more dynamic baseline whereas EPA considered both reference cases. As shown below and in Sections VII

<sup>339</sup> The CAFE model has been under ongoing development, application, review, and refinement since 2002. In five rulemakings subject to public review and comment, DOT has used the model to estimate the potential impacts of new CAFE standards. The model has also been subject to formal review outside the rulemaking process, and DOT anticipates comments on the model in mid-2015 as part of a broader report under development by the National Academy of Sciences (NAS). The model, underlying source code, inputs, and outputs are available at NHTSA's Web site, and some outside organizations are making use of the model. The agency anticipates that stakeholders will have comments on recent model changes made to accommodate standards for HD pickups and vans.

through X, using the two different reference cases has little impact on the results of the analysis and would not lead to a different conclusion regarding the appropriateness of the proposed standards. As such, the use of different reference cases corroborates the results of the overall analysis.

The proposed phase-in schedule of reduction of 2.5 percent per year in fuel consumption and CO<sub>2</sub> levels relative to the 2018 MY Phase 1 standard level, starting in MY 2021 and extending through MY 2027, was chosen to strike a balance between meaningful reductions in the early years and providing manufacturers with needed lead time via a gradually accelerating ramp-up of technology penetration. By expressing the phase-in in terms of increasing year to year stringency for each manufacturer, while also providing for credit generation and use (including averaging, carry-forward, and carry-back), we believe our proposed program would afford manufacturers substantial flexibility to satisfy the proposed phase-in through a variety of pathways: the gradual application of technologies across the fleet, greater application levels on only a portion of the fleet, and a sufficiently broad set of available technologies to account for the variety of current technology deployment among manufacturers and the lowest-cost compliance paths available to each.

We decided to propose a phased implementation schedule that would be appropriate to accommodate manufacturers' redesign workload and product schedules, especially in light of this sector's limited product offerings<sup>340</sup> and long product cycles. We did not estimate the cost of implementing the proposed standards immediately in 2021 without a phase-in, but we qualitatively assessed it to be somewhat higher than the cost of the phase-in we are proposing, due to the workload and product cycle disruptions it could cause, and also due to manufacturers' resulting need to develop some of these technologies for heavy-duty applications sooner than or simultaneously with light-duty development efforts. See 75 FR 25451 (May 7, 2010) (documenting types of drastic cost increases associated with trying to accelerate redesign schedules and concluding that "[w]e believe that it would be an inefficient use of societal resources to incur such costs when they can be obtained much more cost effectively just one year later"). On the other hand, waiting until 2027 before applying any new standards could miss

<sup>340</sup> Manufacturers generally have only one pickup platform and one van platform in this segment.

<sup>338</sup> 49 U.S.C. 32902(k)(2).

the opportunity to achieve meaningful and cost-effective early reductions not requiring a major product redesign.

The agencies believe that Alternative 4 has the potential to be the maximum feasible alternative, however, the agencies are uncertain that the potential technologies and market penetration rates included in Alternative 4 are currently technologically feasible. Alternative 4 would ultimately reach the same levels of stringency as Alternative 3, but would do so with less lead time. This could require the application of a somewhat different (and possibly broader) application of the projected technologies depending on product redesign cycles. We expect, in fact, that some of these technologies may well prove feasible and cost-effective in this timeframe, and may even become technologies of choice for individual manufacturers.

Additionally, Alternative 3 provides two more years of phase-in than Alternative 4, which eases compliance burden by having more vehicle redesigns and lower stringency during the phase-in period. Historically, the vehicles in this segment are typically only redesigned every 6–10 years, so many of the vehicles may not even be redesigned during the timeframe of the stringency increase. In this case, a manufacturer must either make up for any vehicle that falls short of its target through some combination of early compliance, overcompliance, credit carry-forward and carry-back, and redesigning vehicles more frequently. Each of these will increase technology costs to the manufacturers and vehicle purchasers, and early redesigns will significantly increase capital costs and product development costs. Also, the longer phase-in time for Alternative 3 means that any manufacturer will have a slightly lower target to meet from 2021–2026 than for the shorter phase-in of Alternative 4, though by 2027 the manufacturers will have the same target in either alternative.

Alternative 4 is projected to be met using a significantly higher degree of hybridization including the use of more strong hybrids, compared to the proposed preferred Alternative 3. In order to comply with a 3.5 percent per year increase in stringency over MYs 2021–2025, manufacturers would need to adopt more technology compared to the 2.5 percent per year increase in stringency over MYs 2021–2027. The two years of additional lead time provided by Alternative 3 to achieve the proposed final standards reduces the potential number of strong hybrids projected to be used by allowing for other more cost effective technologies to

be more fully utilized across the fleet. Alternative 4 is also projected to result in higher costs and risks than the proposed Alternative 3 due to the projected higher technology adoption rates with the additional emission reductions and fuel savings predominately occurring only during the program phase-in period. The agencies' analysis is discussed in detail below.

In some cases, the model selects strong hybrids as a more cost effective technology over certain other technologies including stop-start and mild hybrid. In other words, strong hybrids are not a technology of last resort in the analysis. The agencies believe it is technologically feasible to apply hybridization to HD pickups and vans in the lead time provided. However, strong hybrids present challenges in this market segment compared to light-duty where there are several strong hybrids already available. The agencies do not believe that at this stage there is enough information about the viability of strong hybrid technology in this vehicle segment to assume that they can be a part of large-volume deployment strategies for regulated manufacturers. For example, we believe that hybrid electric technology could provide significant GHG and fuel consumption benefits, but we recognize that there is uncertainty at this time over the real world effectiveness of these systems in HD pickups and vans, and over customer acceptance of the technology for vehicles with high GCWR towing large loads. Further, the development, design, and tooling effort needed to apply this technology to a vehicle model is quite large, and might not be cost-effective due to the small sales volumes relative to the light-duty sector. Additionally, the analysis does not project that engines would be downsized in conjunction with hybridization for HD pickups and vans due to the importance pickup trucks buyers place on engine horsepower and torque necessary to meet towing objectives. Therefore, with no change projected for engine size, the strong hybrid costs do not include costs for engine changes. In light-duty, the use of smaller engines facilitates much of a hybrid's benefit.

Due to these considerations, the agencies have conducted a sensitivity analysis that is based on the use of no strong hybrids. The results of the analysis are also discussed below. The analysis indicates that there would be a technology pathway that would allow manufacturers to meet both the proposed preferred Alternatives 3 and Alternative 4 without the use of strong hybrids. However, the analysis indicates

that costs would be higher and the cost effectiveness would be lower under the no strong hybrid approach, especially for Alternative 4, which provides less lead time to manufacturers.

We also considered proposing less stringent standards under which manufacturers could comply by deploying a more limited set of technologies. However, our assessment concluded with a high degree of confidence that the technologies on which the proposed standards are premised would be available at reasonable cost in the 2021–2027 timeframe, and that the phase-in and other flexibility provisions allow for their application in a very cost-effective manner, as discussed in this section below.

More difficult to characterize is the degree to which more or less stringent standards might be appropriate because of under- or over-estimating the costs or effectiveness of the technologies whose performance is the basis of the proposed standards. For the most part, these technologies have not yet been applied to HD pickups and vans, even on a limited basis. We are therefore relying to some degree on engineering judgment in predicting their effectiveness. Even so, we believe that we have applied this judgment using the best information available, primarily from a NHTSA contracted study at SwRI<sup>341</sup> and our recent rulemaking on light-duty vehicle GHGs and fuel economy, and have generated a robust set of effectiveness values. Chapter 10 of the draft RIA provides a detailed description of the CAFE Model and the analysis performed for the proposal.

#### (1) Regulatory Alternatives Considered by the Agencies

As discussed above, the agencies are proposing standards defined by fuel consumption and GHG targets that continue through model year 2020 unchanged from model year 2018, and then increase in stringency at an annual rate of 2.5 percent through model year 2027. In addition to this regulatory alternative, the agencies also considered a no-action alternative under which standards remain unchanged after model year 2018, as well as three other alternatives, defined by annual stringency increases of 2.0 percent, 3.5 percent, and 4.0 percent during 2021–2025. For each of the “action alternatives” (*i.e.*, those involving stringency increases beyond the no-

<sup>341</sup> Reinhart, T.E. (June 2015). *Commercial Medium- and Heavy-Duty Truck Fuel Efficiency Technology Study—Report #1*. (Report No. DOT HS 812 146). Washington, DC: National Highway Traffic Safety Administration.

action alternative), the annual stringency increases are applied as follows: An annual stringency increase of  $r$  is applied by multiplying the model year 2020 target functions (identical to those applicable to model year 2018) by  $1 - r$  to define the model year 2021 target functions, multiplying the model year 2021 target functions by  $1 - r$  to define the model year 2022 target functions, continuing through 2025 for all alternatives except for the preferred Alternative 3 which extends through 2027. In summary, the agencies have considered the following five regulatory alternatives in Table VI–3.

TABLE VI–3 REGULATORY ALTERNATIVES

Regulatory alternative	Annual stringency increase		
	2019–2020	2021–2025	2026–2027
1: No Action .....	None	None	None
2: 2.0%/y .....	None	2.0%	None
3: 2.5%/y .....	None	2.5%	2.5%
4: 3.5%/y .....	None	3.5%	None
5: 4.0%/y .....	None	4.0%	None

#### (2) DOT CAFE Model

DOT developed the CAFE model in 2002 to support the 2003 issuance of CAFE standards for MYs 2005–2007 light trucks. DOT has since significantly expanded and refined the model, and has applied the model to support every ensuing CAFE rulemaking for both light-duty and heavy-duty. For this analysis, the model was reconfigured to use the work based attribute metric of “work factor” established in the Phase 1 rule instead of the light duty “footprint” attribute metric.

Although the CAFE model can also be used for more aggregated analysis (e.g., involving “representative vehicles”, single-year snapshots, etc.), NHTSA designed the model with a view toward (a) detailed simulation of manufacturers’ potential actions given a defined set of standards, followed by (b) calculation of resultant impacts and economic costs and benefits. The model is intended to describe actions manufacturers *could* take in light of defined standards and other input assumptions and estimates, not to predict actions manufacturers *will* take in light of competing product and market interests (e.g. engine power, customer features, technology acceptance, etc.).

For these rules, the agencies conducted coordinated and complementary analyses using two analytical methods for the heavy-duty pickup and van segment by employing

both DOT’s CAFE model and EPA’s MOVES model. The agencies used EPA’s MOVES model to estimate fuel consumption and emissions impacts for tractor-trailers (including the engine that powers the tractor), and vocational vehicles (including the engine that powers the vehicle). Additional calculations were performed to determine corresponding monetized program costs and benefits. For heavy-duty pickups and vans, the agencies performed complementary analyses, which we refer to as “Method A” and “Method B”. In Method A, the CAFE model was used to project a pathway the industry could use to comply with each regulatory alternative and the estimated effects on fuel consumption, emissions, benefits and costs. In Method B, the CAFE model was used to project a pathway the industry could use to comply with each regulatory alternative, along with resultant impacts on per vehicle costs, and the MOVES model was used to calculate corresponding changes in total fuel consumption and annual emissions. Additional calculations were performed to determine corresponding monetized program costs and benefits. NHTSA considered Method A as its central analysis and Method B as a supplemental analysis. EPA considered the results of both methods. The agencies concluded that both methods led the agencies to the same conclusions and the same selection of the proposed standards. See Section VII for additional discussion of these two methods.

As a starting point, the model makes use of an input file defining the analysis fleet—that is, a set of specific vehicle models (e.g., Ford F250) and model configurations (e.g., Ford F250 with 6.2-liter V8 engine, 4WD, and 6-speed manual transmission) estimated or assumed to be produced by each manufacturer in each model year to be included in the analysis. The analysis fleet includes key engineering attributes (e.g., curb weight, payload and towing capacities, dimensions, presence of various fuel-saving technologies) of each vehicle model, engine, and transmissions, along with estimates or assumptions of future production volumes. It also specifies the extent to which specific vehicle models share engines, transmissions, and vehicle platforms, and describes each manufacturer’s estimated or assumed product cadence (i.e., timing for freshening and redesigning different vehicles and platforms). This input file also specifies a payback period used to estimate the potential that each manufacturer might apply technology to

improve fuel economy beyond levels required by standards. The file used for this analysis was created from 2014 manufacturer compliance reports for the base sales and technology information, and a future fleet projection created from a combination of data from a sales forecast that the agencies purchased from IHS Automotive and total volumes class 2b and 3 fleet volumes from 2014 AEO Reference Case. A complete description of the future fleet is available in Draft RIA Chapter 10.

A second input file to the model contains a variety of contextual estimates and assumptions. Some of these inputs, such as future fuel prices and vehicle survival and mileage accumulation (versus vehicle age), are relevant to estimating manufacturers’ potential application of fuel-saving technologies. Some others, such as fuel density and carbon content, vehicular and upstream emission factors, the social cost of carbon dioxide emissions, and the discount rate, are relevant to calculating physical and economic impacts of manufacturers’ application of fuel-saving technologies.

A third input file contains estimates and assumptions regarding the future applicability, availability, efficacy, and cost of various fuel-saving technologies. Efficacy is expressed in terms of the percentage reduction in fuel consumption, cost is expressed in dollars, and both efficacy and cost are expressed on an incremental basis (i.e., estimates for more advanced technologies are specified as increments beyond less advanced technologies). The input file also includes “synergy factors” used to make adjustments accounting for the potential that some combinations of technologies may result in fuel savings or costs different from those indicated by incremental values.

Finally, a fourth model input file specifies standards to be evaluated. Standards are defined on a year-by-year basis separately for each regulatory class (passenger cars, light trucks, and heavy-duty pickups and vans). Regulatory alternatives are specified as discrete scenarios, with one scenario defining the no-action alternative or “baseline”, all other scenarios defining regulatory alternatives to be evaluated relative to that no-action alternative.

Given these inputs, the model estimates each manufacturer’s potential year-by-year application of fuel-saving technologies to each engine, transmission, and vehicle. Subject to a range of engineering and planning-related constraints (e.g., secondary axle disconnect can’t be applied to 2-wheel drive vehicles, many major technologies can only be applied practicably as part

of a vehicle redesign, and applied technologies carry forward between model years), the model attempts to apply technology to each manufacturer's fleet in a manner that minimizes "effective costs" (accounting, in particular, for technology costs and avoided fuel outlays), continuing to add improvements as long as doing so would help toward compliance with specified standards or would produce fuel savings that "pay back" at least as quickly as specified in the input file mentioned above.

After estimating the extent to which each manufacturer might add fuel-saving technologies under each specified regulatory alternative, the model calculates a range of physical impacts, such as changes in highway travel (*i.e.*, VMT), changes in fleetwide fuel consumption, changes in highway fatalities, and changes in vehicular and upstream greenhouse gas and criteria pollutant emissions. The model also applies a variety of input estimates and assumptions to calculate economic costs and benefits to vehicle owners and society, based on these physical impacts.

Since the manufacturers of HD pickups and vans generally only have one basic pickup truck and van with different versions (*i.e.*, different wheelbases, cab sizes, two-wheel drive, four-wheel drive, etc.) there exists less flexibility than in the light-duty fleet to coordinate model improvements over several years. As such, the CAFE model allows changes to the HD pickups and vans to meet new standards according to predefined redesign cycles included as a model input. As noted above, the opportunities for large-scale changes (*e.g.*, new engines, transmission, vehicle body and mass) thus occur less frequently than in the light-duty fleet, typically at spans of eight or more years for this analysis. However, opportunities for gradual improvements not necessarily linked to large scale changes can occur between the redesign cycles (*i.e.*, model refresh). Examples of such improvements are upgrades to an existing vehicle model's engine, transmission and aftertreatment systems. Given the long redesign cycle used in this analysis and the understanding with respect to where the different manufacturers are in that cycle, the agencies have initially determined that the full implementation of the proposed standards would be feasible and appropriate by the 2027 model year.

This analysis reflects several changes made to the model since 2012, when NHTSA used the model to estimate the effects, costs, and benefits of final CAFE

standards for light-duty vehicles produced during MYs 2017–2021, and augural standards for MYs 2022–2025. Some of these changes specifically enable analysis of potential fuel consumption standards (and, hence, CO<sub>2</sub> emissions standards harmonized with fuel consumption standards) for heavy-duty pickups and vans; other changes implement more general improvements to the model. Key changes include the following:

- Changes to accommodate standards for heavy-duty pickups and vans, including attribute-based standards involving targets that vary with "work factor".
- Explicit calculation of test weight, taking into account test weight "bins" and differences in the definition of test weight for light-duty vehicles (curb weight plus 300 pound) and heavy-duty pickups and vans (average of GVWR and curb weight).
- Procedures to estimate increases in payload when curb weight is reduced, increases in towing capacity if GVWR is reduced, and calculation procedures to correspondingly update calculated work factors.
- Inclusion of technologies not included in prior analyses.
- Changes to enable more explicit accounting for shared vehicle platforms and adoption and "inheritance" of major engine changes.
- Expansion of the Monte Carlo simulation procedures used to perform probabilistic uncertainty analysis.

In addition to the inputs summarized above, the agencies' analysis of potential standards for HD pickups and vans makes use of a range of other estimates and assumptions specified as inputs to the CAFE modeling system. Some significant inputs (*e.g.*, estimates of future fuel prices) also applicable to other HD segments are discussed below in Section IX. Others more specific to the analysis of HD pickups and vans are listed as follows, with additional details in section D:

- Vehicle survival and mileage accumulation
- VMT rebound
- On-road "gap" in fuel consumption
- Fleet population profile
- Past fuel consumption levels
- Long-term fuel consumption levels
- Payback period
- Coefficients for fatality calculations
- Compliance credits carried-forward
- Emission factors for non-CO<sub>2</sub> emissions
- Refueling time benefits
- External Costs of travel
- Ownership and operating costs

The CAFE model and its modifications for this rulemaking are

described in more detail in Section VI. below as well as the Draft RIA Chapter 10.

### (3) How Did the Agencies Develop the Analysis Fleet

In order to more accurately estimate the impacts of potential standards, the agencies are estimating the composition of the future vehicle fleet. Projections of the future vehicle fleet are also done for both vocational vehicles and tractors. The procedure for pickups and vans is more detailed, though, in order to show the differences for each manufacturer in the segment. Doing so enables estimation of the extent to which each manufacturer may need to add technology in response to a given series of attribute-based standards, accounting for the mix and fuel consumption of vehicles in each manufacturer's regulated fleet. The agencies create an analysis fleet in order to track the volumes and types of fuel economy-improving and CO<sub>2</sub>-reducing technologies that are already present in the existing fleet of Class 2b and 3 vehicles. This aspect of the analysis fleet helps to keep the CAFE model from adding technologies to vehicles that already have these technologies, which would result in "double counting" of technologies' costs and benefits. An additional step involved projecting the fleet sales into MYs 2019–2030. This represents the fleet volumes that the agencies believe would exist in MYs 2019–2030. The CAFE model considers the actual redesign years of each vehicle platform for each manufacturer. Due to credit banking, some manufacturers may not need to add technology to comply with the standards until later model years, which may be after the rulemaking period. Therefore, it is necessary to run the model until all of the vehicle technology changes have stabilized.

Most of the information about the vehicles that make up the 2014 analysis fleet was gathered from the 2014 Pre-Model Year Reports submitted to EPA by the manufacturers under Phase 1 of Fuel Efficiency and GHG Emission Program for Medium- and Heavy-Duty Trucks, MYs 2014–2018. The major manufacturers of class 2b and class 3 trucks (Chrysler, Ford and GM) were asked to voluntarily submit updates to their Pre-Model Year Reports. Updated data were provided by Chrysler and GM. The agencies used these updated data in constructing the analysis fleet for these manufacturers. The agencies agreed to treat this information as Confidential Business Information (CBI) until the publication of the proposed rule. This information can be made public at this

time because by now all MY2014 vehicle models have been produced, which makes data about them essentially public information.

In addition to information about each vehicle, the agencies need additional information about the fuel economy-improving/CO<sub>2</sub>-reducing technologies already on those vehicles in order to assess how much and which technologies to apply to determine a path toward future compliance. To correctly account for the cost and effectiveness of adding technologies, it is necessary to know the technology penetration in the existing vehicle fleet. Otherwise, “double-counting” of technology could occur. Thus, the agencies augmented this information with publicly-available data that include more complete technology descriptions, *e.g.* for specific engines and transmissions.

The analysis fleet also requires projections of sales volumes for the years of the rulemaking analysis. The agencies relied on the MY 2014 pre-model-year compliance submissions from manufacturers to provide sales volumes at the model level based on the level of disaggregation in which the models appear in the compliance data. However, the agencies only use these reported volumes without adjustment for MY 2014. For all future model years, we combine the manufacturer submissions with sales projections from the 2014 Annual Energy Outlook Reference Case and IHS Automotive to determine model variant level sales volumes in future years.

For more detail on how the analysis fleet and sales volume projections were developed, please see Section D below as well as the draft RIA Chapter 10.

#### (4) What Technologies Did the Agencies Consider

The agencies considered over 35 vehicle technologies that manufacturers could use to improve the fuel consumption and reduce CO<sub>2</sub> emissions of their vehicles during MYs 2021–2027. The majority of the technologies described in this section are readily available, well known and proven in other vehicle sectors, and could be incorporated into vehicles once production decisions are made. Other technologies considered may not currently be in production, but are beyond the research phase and under development, and are expected to be in production in highway vehicles over the next few years. These are technologies that are capable of achieving significant improvements in fuel economy and reductions in CO<sub>2</sub> emissions, at reasonable costs. The agencies did not

consider technologies in the research stage because there is insufficient time for such technologies to move from research to production during the model years covered by this proposed action. However, we are considering and seek comment on advanced technology credits to encourage the development of such technologies, as discussed below in Section VI.E.

The technologies considered in the agencies’ analysis are briefly described below. They fall into five broad categories: Engine technologies, transmission technologies, vehicle technologies, electrification/accessory technologies, and hybrid technologies.

In this class of trucks and vans, diesel engines are installed in about half of all vehicles. The buyer’s decision to purchase a diesel versus gasoline engine depends on several factors including initial purchase price, fuel operating costs, durability, towing capability and payload capacity amongst other reasons. As discussed in IV.B. above, the agencies generally prefer to set standards that do not distinguish between fuel types where technological or market-based reasons do not strongly argue otherwise. However, as with Phase 1, we continue to believe that fundamental differences between spark ignition and compression ignition engines warrant unique fuel standards, which is also important in ensuring that our program maintains product choices available to vehicle buyers. Therefore, we are proposing separate standards for gasoline and diesel vehicles and in the context of our technology discussion for heavy-duty pickups and vans, we are treating gasoline and diesel engines separately so each has a set of baseline technologies. We discuss performance improvements in terms of changes to those baseline engines. Our cost and inventory estimates contained elsewhere reflect the current fleet baseline with an appropriate mix of gasoline and diesel engines. Note that we are not basing the proposed standards on a targeted switch in the mix of diesel and gasoline vehicles. We believe our proposed standards require similar levels of technology development and cost for both diesel and gasoline vehicles. Hence the proposed program is not intended to force, nor discourage, changes in a manufacturer’s fleet mix between gasoline and diesel vehicles. Types of engine technologies that improve fuel efficiency and reduce CO<sub>2</sub> emissions include the following:

- *Low-friction lubricants*—Low viscosity and advanced low friction lubricant oils are now available with improved performance and better

lubrication. If manufacturers choose to make use of these lubricants, they would need to make engine changes and possibly conduct durability testing to accommodate the low-friction lubricants.

- *Reduction of engine friction losses*—Can be achieved through low-tension piston rings, roller cam followers, improved material coatings, more optimal thermal management, piston surface treatments, and other improvements in the design of engine components and subsystems that improve engine operation.

- *Reduction of engine parasitic demand*—Mechanical engine load reduction can be achieved by variable-displacement oil pumps, higher-efficiency direct injection fuel pumps, and variable speed/displacement coolant pumps.

- *Cylinder deactivation*—Deactivates the intake and exhaust valves and prevents fuel injection into some cylinders during light-load operation. The engine runs temporarily as though it were a smaller engine which substantially reduces pumping losses.

- *Variable valve timing*—Alters the timing of the intake valve, exhaust valve, or both, primarily to reduce pumping losses, increase specific power, and control residual gases.

- *Variable valve lift*—Alters the intake valve lift in order to reduce pumping losses and more efficiently ingest air.

- *Stoichiometric gasoline direct-injection technology*—Injects fuel at high pressure directly into the combustion chamber to improve cooling of the air/fuel charge within the cylinder, which allows for higher compression ratios and increased thermodynamic efficiency.

- *Cooled exhaust gas recirculation*—Technology that conceptually involves utilizing EGR as a charge diluent for controlling combustion temperatures and cooling the EGR prior to its introduction to the combustion system.

- *Turbocharging and downsizing*—Technology approach that conceptually involves decreasing the displacement and cylinder count to improve efficiency when not demanding regular high loads and adding a turbocharger to recover any loss to the original larger engine peak operating power. This technology was limited in this analysis to vehicles that are not expected to operate at high trailer towing levels and instead are more akin to duty cycles of light duty (*i.e.* V6 vans).

- *Lean-burn combustion*—Concept that gasoline engines that are normally stoichiometric mainly for emission reasons can run lean over a range of

operating conditions and utilize diesel like aftertreatment systems to control NO<sub>x</sub>. For this analysis, we determined that the modal operation nature of this technology to currently only be beneficial at light loads would not be appropriate for a heavy duty application purchased specifically for its high work and load capability.

- *Diesel engine improvements and diesel aftertreatment improvements*—Improved turbocharger, EGR systems, and advanced timing can provide more efficient combustion and, hence, lower fuel consumption. Aftertreatment systems are a relatively new technology on diesel vehicles and, as such, improvements are expected in coming years that allow the effectiveness of these systems to improve while reducing the fuel and reductant demands of current systems.

Types of transmission technologies considered include:

- *Eight-speed automatic transmissions*—The gear span, gear ratios, and control system are optimized for a broader range of efficient engine operating conditions.

- *High efficiency transmission*—Significant reduction of internal parasitic losses such as pumps gear bands, etc.

- *Driveline friction reduction*—Reduction in the driveline friction from improvements to bearings, seals and other machining tolerances in the axles and transfer cases.

- *Secondary axle disconnect*—Disconnecting of some rotating components in the front axle on 4wd vehicles when the secondary axle is not needed for traction.

Types of vehicle technologies considered include:

- *Low-rolling-resistance tires*—Have characteristics that reduce frictional losses associated with the energy dissipated in the deformation of the tires under load, therefore improving fuel efficiency and reducing CO<sub>2</sub> emissions.

- *Aerodynamic drag reduction*—is achieved by changing vehicle shape or reducing frontal area, including skirts, air dams, underbody covers, and more aerodynamic side view mirrors.

- *Mass reduction and material substitution*—Mass reduction encompasses a variety of techniques ranging from improved design and better component integration to application of lighter and higher-strength materials. Mass reduction is further compounded by reductions in engine power and ancillary systems (transmission, steering, brakes, suspension, etc.). The agencies recognize there is a range of diversity

and complexity for mass reduction and material substitution technologies and there are many techniques that automotive suppliers and manufacturers are using to achieve the levels of this technology that the agencies have modeled in our analysis for this program.

Types of electrification/accessory and hybrid technologies considered include:

- *Electric power steering*—Are electrically-assisted steering systems that have advantages over traditional hydraulic power steering because it replaces a continuously operated hydraulic pump, thereby reducing parasitic losses from the accessory drive.

- *Improved accessories*—May include high efficiency alternators, electrically driven (i.e., on-demand) water pumps and cooling fans. This excludes other electrical accessories such as electric oil pumps and electrically driven air conditioner compressors.

- *Mild hybrid*—A small, engine-driven (through a belt or other mechanism) electric motor/generator/battery combination to enable features such as start-stop, energy recovery, and launch assist.

- *Strong hybrid*—A powerful electric motor/generator/battery system coupled to the powertrain to enable features such as start-stop, and significant levels of launch assist, electric operation, and brake energy recovery. For HD pickups and vans, the engine coupled with the strong hybrid system would remain unchanged in power and torque to ensure vehicle performance at all times, even if the hybrid battery is depleted.

- *Air Conditioner Systems*—These technologies include improved hoses, connectors and seals for leakage control. They also include improved compressors, expansion valves, heat exchangers and the control of these components for the purposes of improving tailpipe CO<sub>2</sub> emissions as a result of A/C use.<sup>342</sup>

(5) How Did the Agencies Determine the Costs and Effectiveness of Each of These Technologies

Building on the technical analysis underlying the 2017–2025 MY light-duty vehicle rule, the 2014–2018 MY heavy-duty vehicle rule, and the 2015 NHTSA Technology Study, the agencies took a fresh look at technology cost and effectiveness values for purposes of this proposal. For costs, the agencies reconsidered both the direct (or “piece”) costs and indirect costs of individual components of technologies. For the

direct costs, the agencies followed a bill of materials (BOM) approach employed by the agencies in the light-duty rule as well as referencing costs from the 2014–2018 MY heavy-duty vehicle rule and a new cost survey performed by Tetra Tech in 2014.

For two technologies, stoichiometric gasoline direct injection (SGDI) and turbocharging with engine downsizing, the agencies relied to the extent possible on the available tear-down data and scaling methodologies used in EPA’s ongoing study with FEV, Incorporated. This study consists of complete system tear-down to evaluate technologies down to the nuts and bolts to arrive at very detailed estimates of the costs associated with manufacturing them.<sup>343</sup>

For the other technologies, considering all sources of information and using the BOM approach, the agencies worked together intensively to determine component costs for each of the technologies and build up the costs accordingly. Where estimates differ between sources, we have used engineering judgment to arrive at what we believe to be the best cost estimate available today, and explained the basis for that exercise of judgment.

Once costs were determined, they were adjusted to ensure that they were all expressed in 2012 dollars (see Section IX.B.1.e of this preamble), and indirect costs were accounted for using a methodology consistent with the new ICM approach developed by EPA and used in the Phase 1 rule, and the 2012–2016 and 2017–2025 light-duty rules. NHTSA and EPA also reconsidered how costs should be adjusted by modifying or scaling content assumptions to account for differences across the range of vehicle sizes and functional requirements, and adjusted the associated material cost impacts to account for the revised content. We present the individual technology costs used in this analysis in Chapter 2.12 of the Draft RIA.

Regarding estimates for technology effectiveness, the agencies used the estimates from the 2014 Southwest Research Institute study as a baseline, which was designed specifically to inform this rulemaking. In addition, the agencies used 2017–2025 light-duty rule as a reference, and adjusted these estimates as appropriate, taking into account the unique requirement of the heavy-duty test cycles to test at curb weight plus half payload versus the light-duty requirement of curb plus 300

<sup>342</sup> See Draft RIA Chapter 2.3 for more detailed technology descriptions.

<sup>343</sup> U.S. Environmental Protection Agency, “Draft Report—Light-Duty Technology Cost Analysis Pilot Study,” Contract No. EP-C-07-069, Work Assignment 1–3, September 3, 2009.

lb. The adjustments were made on an individual technology basis by assessing the specific impact of the added load on each technology when compared to the use of the technology on a light-duty vehicle. The agencies also considered other sources such as the 2010 NAS Report, recent CAFE compliance data, and confidential manufacturer estimates of technology effectiveness. The agencies reviewed effectiveness information from the multiple sources for each technology and ensured that such effectiveness estimates were based on technology hardware consistent with the BOM components used to estimate costs. Together, the agencies compared the multiple estimates and assessed their validity, taking care to ensure that common BOM definitions and other vehicle attributes such as performance and drivability were taken into account.

The agencies note that the effectiveness values estimated for the technologies may represent average values applied to the baseline fleet described earlier, and do not reflect the potentially limitless spectrum of possible values that could result from adding the technology to different vehicles. For example, while the agencies have estimated an effectiveness of 0.5 percent for low friction lubricants, each vehicle could have a unique effectiveness estimate depending on the baseline vehicle's oil viscosity rating. Similarly, the reduction in rolling resistance (and thus the improvement in fuel efficiency and the reduction in CO<sub>2</sub> emissions) due to the application of LRR tires depends not only on the unique characteristics of the tires originally on the vehicle, but on the unique characteristics of the tires being applied, characteristics which must be balanced between fuel efficiency, safety, and performance. Aerodynamic drag reduction is much the same—it can improve fuel efficiency and reduce CO<sub>2</sub> emissions, but it is also highly dependent on vehicle-specific functional objectives. For purposes of this proposed rule, the agencies believe that employing average values for technology effectiveness estimates is an appropriate way of recognizing the potential variation in the specific benefits that individual manufacturers (and individual vehicles) might obtain from adding a fuel-saving technology.

The following contains a description of technologies the agencies considered in the analysis for this proposal.

#### (a) Engine Technologies

The agencies reviewed the engine technology estimates used in the 2017–2025 light-duty rule, the 2014–2018 heavy-duty rule, and the 2015 NHTSA

Technology Study. In doing so the agencies reconsidered all available sources and updated the estimates as appropriate. The section below describes both diesel and gasoline engine technologies considered for this program.

##### (i) Low Friction Lubricants

One of the most basic methods of reducing fuel consumption in both gasoline and diesel engines is the use of lower viscosity engine lubricants. More advanced multi-viscosity engine oils are available today with improved performance in a wider temperature band and with better lubricating properties. This can be accomplished by changes to the oil base stock (e.g., switching engine lubricants from a Group I base oils to lower-friction, lower viscosity Group III synthetic) and through changes to lubricant additive packages (e.g., friction modifiers and viscosity improvers). The use of 5W–30 motor oil is now widespread and auto manufacturers are introducing the use of even lower viscosity oils, such as 5W–20 and 0W–20, to improve cold-flow properties and reduce cold start friction. However, in some cases, changes to the crankshaft, rod and main bearings and changes to the mechanical tolerances of engine components may be required. In all cases, durability testing would be required to ensure that durability is not compromised. The shift to lower viscosity and lower friction lubricants will also improve the effectiveness of valvetrain technologies such as cylinder deactivation, which rely on a minimum oil temperature (viscosity) for operation.

##### (ii) Engine Friction Reduction

In addition to low friction lubricants, manufacturers can also reduce friction and improve fuel consumption by improving the design of both diesel and gasoline engine components and subsystems. Approximately 10 percent of the energy consumed by a vehicle is lost to friction, and just over half is due to frictional losses within the engine.<sup>344</sup> Examples include improvements in low-tension piston rings, piston skirt design, roller cam followers, improved crankshaft design and bearings, material coatings, material substitution, more optimal thermal management, and piston and cylinder surface treatments.

<sup>344</sup> "Impact of Friction Reduction Technologies on Fuel Economy," Fenske, G. Presented at the March 2009 Chicago Chapter Meeting of the 'Society of Tribologists and Lubricated Engineers' Meeting, March 18th, 2009. Available at: <http://www.chicagostle.org/program/2008-2009/Impact%20of%20Friction%20Reduction%20Technologies%20on%20Fuel%20Economy%20-%20with%20VGs%20removed.pdf> (last accessed July 9, 2009).

Additionally, as computer-aided modeling software continues to improve, more opportunities for evolutionary friction reductions may become available. All reciprocating and rotating components in the engine are potential candidates for friction reduction, and minute improvements in several components can add up to a measurable fuel efficiency improvement.

##### (iii) Engine Parasitic Demand Reduction

In addition to physical engine friction reduction, manufacturers can reduce the mechanical load on the engine from parasitics, such as oil, fuel, and coolant pumps. The high-pressure fuel pumps of direct-injection gasoline and diesel engines have particularly high demand. Example improvements include variable speed or variable displacement water pumps, variable displacement oil pumps, more efficient high pressure fuel pumps, valvetrain upgrades and shutting off piston cooling when not needed.

##### (iv) Coupled Cam Phasing

Valvetrains with coupled (or coordinated) cam phasing can modify the timing of both the inlet valves and the exhaust valves an equal amount by phasing the camshaft of an overhead valve engine.<sup>345</sup> For overhead valve engines, which have only one camshaft to actuate both inlet and exhaust valves, couple cam phasing is the only variable valve timing implementation option available and requires only one cam phaser.<sup>346</sup>

##### (v) Cylinder Deactivation

In conventional spark-ignited engines throttling the airflow controls engine torque output. At partial loads, efficiency can be improved by using cylinder deactivation instead of throttling. Cylinder deactivation can improve engine efficiency by disabling or deactivating (usually) half of the cylinders when the load is less than half of the engine's total torque capability—the valves are kept closed, and no fuel is injected—as a result, the trapped air

<sup>345</sup> Although couple cam phasing appears only in the single overhead cam and overhead valve branches of the decision tree, it is noted that a single phaser with a secondary chain drive would allow couple cam phasing to be applied to direct overhead cam engines. Since this would potentially be adopted on a limited number of direct overhead cam engines NHTSA did not include it in that branch of the decision tree.

<sup>346</sup> It is also noted that coaxial camshaft developments would allow other variable valve timing options to be applied to overhead valve engines. However, since they would potentially be adopted on a limited number of overhead valve engines, NHTSA did not include them in the decision tree.



within the deactivated cylinders is simply compressed and expanded as an air spring, with reduced friction and heat losses. The active cylinders combust at almost double the load required if all of the cylinders were operating. Pumping losses are significantly reduced as long as the engine is operated in this “part-cylinder” mode.

Cylinder deactivation control strategy relies on setting maximum manifold absolute pressures or predicted torque within a range in which it can deactivate the cylinders. Noise and vibration issues reduce the operating range to which cylinder deactivation is allowed, although manufacturers are exploring vehicle changes that enable increasing the amount of time that cylinder deactivation might be suitable. Some manufacturers may choose to adopt active engine mounts and/or active noise cancellations systems to address Noise Vibration and Harshness (NVH) concerns and to allow a greater operating range of activation.

Cylinder deactivation has seen a recent resurgence thanks to better valvetrain designs and engine controls. General Motors and Chrysler Group have incorporated cylinder deactivation across a substantial portion of their V8-powered lineups.

#### (vi) Stoichiometric Gasoline Direct Injection

SGDI engines inject fuel at high pressure directly into the combustion chamber (rather than the intake port in port fuel injection). SGDI requires changes to the injector design, an additional high pressure fuel pump, new fuel rails to handle the higher fuel pressures and changes to the cylinder head and piston crown design. Direct injection of the fuel into the cylinder improves cooling of the air/fuel charge within the cylinder, which allows for higher compression ratios and increased thermodynamic efficiency without the onset of combustion knock. Recent injector design advances, improved electronic engine management systems and the introduction of multiple injection events per cylinder firing cycle promote better mixing of the air and fuel, enhance combustion rates, increase residual exhaust gas tolerance and improve cold start emissions. SGDI engines achieve higher power density and match well with other technologies, such as boosting and variable valvetrain designs.

Several manufacturers have recently introduced vehicles with SGDI engines, including GM and Ford and have announced their plans to increase

dramatically the number of SGDI engines in their portfolios.

#### (vii) Turbocharging and Downsizing

The specific power of a naturally aspirated engine is primarily limited by the rate at which the engine is able to draw air into the combustion chambers. Turbocharging and supercharging (grouped together here as boosting) are two methods to increase the intake manifold pressure and cylinder charge-air mass above naturally aspirated levels. Boosting increases the airflow into the engine, thus increasing the specific power level, and with it the ability to reduce engine displacement while maintaining performance. This effectively reduces the pumping losses at lighter loads in comparison to a larger, naturally aspirated engine.

Almost every major manufacturer currently markets a vehicle with some form of boosting. While boosting has been a common practice for increasing performance for several decades, turbocharging has considerable potential to improve fuel economy and reduce CO<sub>2</sub> emissions when the engine displacement is also reduced. Specific power levels for a boosted engine often exceed 100 hp/L, compared to average naturally aspirated engine power densities of roughly 70 hp/L. As a result, engines can be downsized roughly 30 percent or higher while maintaining similar peak output levels. In the last decade, improvements to turbocharger turbine and compressor design have improved their reliability and performance across the entire engine operating range. New variable geometry turbines and ball-bearing center cartridges allow faster turbocharger spool-up (virtually eliminating the once-common “turbo lag”) while maintaining high flow rates for increased boost at high engine speeds. Low speed torque output has been dramatically improved for modern turbocharged engines. However, even with turbocharger improvements, maximum engine torque at very low engine speed conditions, for example launch from standstill, is increased less than at mid and high engine speed conditions. The potential to downsize engines may be less on vehicles with low displacement to vehicle mass ratios for example a very small displacement engine in a vehicle with significant curb weight, in order to provide adequate acceleration from standstill, particularly up grades or at high altitudes.

The use of GDI in combination with turbocharging and charge air cooling reduces the fuel octane requirements for knock limited combustion enabling the use of higher compression ratios and

boosting pressures. Recently published data with advanced spray-guided injection systems and more aggressive engine downsizing targeted towards reduced fuel consumption and CO<sub>2</sub> emissions reductions indicate that the potential for reducing CO<sub>2</sub> emissions for turbocharged, downsized GDI engines may be as much as 15 to 30 percent relative to port-fuel-injected engines.<sup>14 15 16 17 18</sup> Confidential manufacturer data suggests an incremental range of fuel consumption and CO<sub>2</sub> emission reduction of 4.8 to 7.5 percent for turbocharging and downsizing. Other publicly-available sources suggest a fuel consumption and CO<sub>2</sub> emission reduction of 8 to 13 percent compared to current-production naturally-aspirated engines without friction reduction or other fuel economy technologies: a joint technical paper by Bosch and Ricardo suggesting fuel economy gain of 8 to 10 percent for downsizing from a 5.7 liter port injection V8 to a 3.6 liter V6 with direct injection using a wall-guided direct injection system; a Renault report suggesting a 11.9 percent NEDC fuel consumption gain for downsizing from a 1.4 liter port injection in-line 4-cylinder engine to a 1.0 liter in-line 4-cylinder engine, also with wall-guided direct injection; and a Robert Bosch paper suggesting a 13 percent NEDC gain for downsizing to a turbocharged DI engine, again with wall-guided injection. These reported fuel economy benefits show a wide range depending on the SGDI technology employed.

Note that for this analysis we determined that this technology path is only applicable to heavy duty applications that have operating conditions more closely associated with light duty vehicles. This includes vans designed mainly for cargo volume or modest payloads having similar GCWR to light duty applications. These vans cannot tow trailers heavier than similar light duty vehicles and are largely already sharing engines of significantly smaller displacement and cylinder count compared to heavy duty vehicles designed mainly for trailer towing.

#### (viii) Cooled Exhaust-Gas Recirculation

Cooled exhaust gas recirculation or Boosted EGR is a combustion concept that involves utilizing EGR as a charge diluent for controlling combustion temperatures and cooling the EGR prior to its introduction to the combustion system. Higher exhaust gas residual levels at part load conditions reduce pumping losses for increased fuel economy. The additional charge dilution enabled by cooled EGR reduces the incidence of knocking combustion



and obviates the need for fuel enrichment at high engine power. This allows for higher boost pressure and/or compression ratio and further reduction in engine displacement and both pumping and friction losses while maintaining performance. Engines of this type use GDI and both dual cam phasing and discrete variable valve lift. The EGR systems considered in this proposed rule, consistent with the proposal, would use a dual-loop system with both high and low pressure EGR loops and dual EGR coolers. The engines would also use single-stage, variable geometry turbocharging with higher intake boost pressure available across a broader range of engine operation than conventional turbocharged SI engines. Such a system is estimated to be capable of an additional 3 to 5 percent effectiveness relative to a turbocharged, downsized GDI engine without cooled-EGR. The agencies have also considered a more advanced version of such a cooled EGR system that employs very high combustion pressures by using dual stage turbocharging.

#### (b) Diesel Engine Technologies

Diesel engines have several characteristics that give them superior fuel efficiency compared to conventional gasoline, spark-ignited engines. Pumping losses are much lower due to lack of (or greatly reduced) throttling. The diesel combustion cycle operates at a higher compression ratio, with a very lean air/fuel mixture, and turbocharged light-duty diesels typically achieve much higher torque levels at lower engine speeds than equivalent-displacement naturally-aspirated gasoline engines. Additionally, diesel fuel has a higher energy content per gallon.<sup>347</sup> However, diesel fuel also has a higher carbon to hydrogen ratio, which increases the amount of CO<sub>2</sub> emitted per gallon of fuel used by approximately 15 percent over a gallon of gasoline.

Based on confidential business information and the 2010 NAS Report, two major areas of diesel engine design could be improved during the timeframe of this proposed rule. These areas include aftertreatment improvements and a broad range of engine improvements.

#### (i) Aftertreatment Improvements

The HD diesel pickup and van segment has largely adopted the SCR type of aftertreatment system to comply

with criteria pollutant emission standards. As the experience base for SCR expands over the next few years, many improvements in this aftertreatment system such as construction of the catalyst, thermal management, and reductant optimization may result in a reduction in the amount of fuel used in the process. However, due to uncertainties with these improvements regarding the extent of current optimization and future criteria emissions obligations, the agencies are not considering aftertreatment improvements as a fuel-saving technology in the rulemaking analysis.

#### (ii) Engine Improvements

Diesel engines in the HD pickup and van segment are expected to have several improvements in their base design in the 2021–2027 timeframe. These improvements include items such as improved combustion management, optimal turbocharger design, and improved thermal management.

#### (c) Transmission Technologies

The agencies have also reviewed the transmission technology estimates used in the 2017–2015 light-duty and 2014–2018 heavy-duty final rules. In doing so, NHTSA and EPA considered or reconsidered all available sources including the 2015 NHTSA Technology Study and updated the estimates as appropriate. The section below describes each of the transmission technologies considered for the proposal.

#### (i) Automatic 8-Speed Transmissions

Manufacturers can also choose to replace 6-speed automatic transmissions with 8-speed automatic transmissions. Additional ratios allow for further optimization of engine operation over a wider range of conditions, but this is subject to diminishing returns as the number of speeds increases. As additional gear sets are added, additional weight and friction are introduced requiring additional countermeasures to offset these losses. Some manufacturers are replacing 6-speed automatics already, and 7- and 8-speed automatics have entered production.

#### (ii) High Efficiency Transmission

For this proposal, a high efficiency transmission refers to some or all of a suite of incremental transmission improvement technologies that should be available within the 2019 to 2027 timeframe. The majority of these improvements address mechanical friction within the transmission. These

improvements include but are not limited to: shifting clutch technology improvements, improved kinematic design, dry sump lubrication systems, more efficient seals, bearings and clutches (reducing drag), component superfinishing and improved transmission lubricants.

#### (d) Electrification/Accessory Technologies

##### (i) Electrical Power Steering or Electrohydraulic Power Steering

Electric power steering (EPS) or Electrohydraulic power steering (EHPS) provides a potential reduction in CO<sub>2</sub> emissions and fuel consumption over hydraulic power steering because of reduced overall accessory loads. This eliminates the parasitic losses associated with belt-driven power steering pumps which consistently draw load from the engine to pump hydraulic fluid through the steering actuation systems even when the wheels are not being turned. EPS is an enabler for all vehicle hybridization technologies since it provides power steering when the engine is off. EPS may be implemented on most vehicles with a standard 12V system. Some heavier vehicles may require a higher voltage system which may add cost and complexity.

##### (ii) Improved Accessories

The accessories on an engine, including the alternator, coolant and oil pumps are traditionally mechanically-driven. A reduction in CO<sub>2</sub> emissions and fuel consumption can be realized by driving them electrically, and only when needed (“on-demand”).

Electric water pumps and electric fans can provide better control of engine cooling. For example, coolant flow from an electric water pump can be reduced and the radiator fan can be shut off during engine warm-up or cold ambient temperature conditions which will reduce warm-up time, reduce warm-up fuel enrichment, and reduce parasitic losses.

Indirect benefit may be obtained by reducing the flow from the water pump electrically during the engine warm-up period, allowing the engine to heat more rapidly and thereby reducing the fuel enrichment needed during cold operation and warm-up of the engine. Faster oil warm-up may also result from better management of the coolant warm-up period. Further benefit may be obtained when electrification is combined with an improved, higher efficiency engine alternator used to supply power to the electrified accessories.

Intelligent cooling can more easily be applied to vehicles that do not typically

<sup>347</sup> Burning one gallon of diesel fuel produces about 15 percent more carbon dioxide than gasoline due to the higher density and carbon to hydrogen ratio.

carry heavy payloads, so larger vehicles with towing capacity present a challenge, as these vehicles have high cooling fan loads.<sup>348</sup> However, towing vehicles tend to have large cooling system capacity and flow scaled to required heat rejection levels when under full load situations such as towing at GCWR in extreme ambient conditions. During almost all other situations, this design characteristic may result in unnecessary energy usage for coolant pumping and heat rejection to the radiator.

The agencies considered whether to include electric oil pump technology for the rulemaking. Because it is necessary to operate the oil pump any time the engine is running, electric oil pump technology has insignificant effect on efficiency. Therefore, the agencies decided to not include electric oil pump technology.

#### (iii) Mild Hybrid

Mild hybrid systems offer idle-stop functionality and a limited level of regenerative braking and power assist. These systems replace the conventional alternator with a belt or crank driven starter/alternator and may add high voltage electrical accessories (which may include electric power steering and an auxiliary automatic transmission pump). The limited electrical requirements of these systems allow the use of lead-acid batteries or supercapacitors for energy storage, or the use of a small lithium-ion battery pack.

#### (iv) Strong Hybrid

A hybrid vehicle is a vehicle that combines two significant sources of propulsion energy, where one uses a consumable fuel (like gasoline), and one is rechargeable (during operation, or by another energy source). Hybrid technology is well established in the U.S. light-duty market and more manufacturers are adding hybrid models to their lineups. Hybrids reduce fuel consumption through three major mechanisms:

- The internal combustion engine can be optimized (through downsizing, modifying the operating cycle, or other control techniques) to operate at or near its most efficient point more of the time. Power loss from engine downsizing can be mitigated by employing power assist from the secondary power source.

- A significant amount of the energy normally lost as heat while braking can

be captured and stored in the energy storage system for later use.

- The engine is turned off when it is not needed, such as when the vehicle is coasting or when stopped.

Hybrid vehicles utilize some combination of the three above mechanisms to reduce fuel consumption and CO<sub>2</sub> emissions. The effectiveness of fuel consumption and CO<sub>2</sub> reduction depends on the utilization of the above mechanisms and how aggressively they are pursued. One area where this variation is particularly prevalent is in the choice of engine size and its effect on balancing fuel economy and performance. Some manufacturers choose not to downsize the engine when applying hybrid technologies. In these cases, overall performance (acceleration) is typically improved beyond the conventional engine. However, fuel efficiency improves less than if the engine was downsized to maintain the same performance as the conventional version. The non-downsizing approach is used for vehicles like trucks where towing and/or hauling are an integral part of their performance requirements. In these cases, if the engine is downsized, the battery can be quickly drained during a long hill climb with a heavy load, leaving only a downsized engine to carry the entire load. Because towing capability is currently a heavily-marketed truck attribute, manufacturers are hesitant to offer a truck with downsized engine which can lead to a significantly diminished towing performance when the battery state of charge level is low, and therefore engines are traditionally not downsized for these vehicles.

Strong Hybrid technology utilizes an axial electric motor connected to the transmission input shaft and connected to the engine crankshaft through a clutch. The axial motor is a motor/generator that can provide sufficient torque for launch assist, all electric operation, and the ability to recover significant levels of braking energy.

#### (e) Vehicle Technologies

##### (i) Mass Reduction

Mass reduction is a technology that can be used in a manufacturer's strategy to meet the Heavy Duty Greenhouse Gas Phase 2 standards. Vehicle mass reduction (also referred to as "down-weighting" or "light-weighting"), decreases fuel consumption and GHG emissions by reducing the energy demand needed to overcome inertia forces, and rolling resistance. Automotive companies have worked with mass reduction technologies for many years and a lot of these

technologies have been used in production vehicles. The weight savings achieved by adopting mass reduction technologies offset weight gains due to increased vehicle size, larger powertrains, and increased feature content (sound insulation, entertainment systems, improved climate control, panoramic roof, etc.). Sometimes mass reduction has been used to increase vehicle towing and payload capabilities.

Manufacturers employ a systematic approach to mass reduction, where the net mass reduction is the addition of a direct component or system mass reduction, also referred to as primary mass reduction, plus the additional mass reduction taken from indirect ancillary systems and components, also referred to as secondary mass reduction or mass compounding. There are more secondary mass reductions achievable for light-duty vehicles compared to heavy-duty vehicles, which are limited due to the higher towing and payload requirements for these vehicles.

Mass reduction can be achieved through a number of approaches, even while maintaining other vehicle functionalities. As summarized by NAS in its 2011 light duty vehicle report,<sup>349</sup> there are two key strategies for primary mass reduction: (1) Changing the design to use less material; (2) substituting lighter materials for heavier materials.

The first key strategy of using less material compared to the baseline component can be achieved by optimizing the design and structure of vehicle components, systems and vehicle structure. Vehicle manufacturers have long used these continually-improving CAE tools to optimize vehicle designs. For example, the Future Steel Vehicle (FSV) project<sup>350</sup> sponsored by WorldAutoSteel used three levels of optimization: topology optimization, low fidelity 3G (Geometry Grade and Gauge) optimization, and subsystem optimization, to achieve 30 percent mass reduction in the body structure of a vehicle with a mild steel unibody structure. Using less material can also be achieved through improving the manufacturing process, such as by using improved joining technologies and parts consolidation. This method is

<sup>349</sup> Committee on the Assessment of Technologies for Improving Light-Duty Vehicle Fuel Economy; National Research Council, "Assessment of Fuel Economy Technologies for Light-Duty Vehicles", 2011. Available at [http://www.nap.edu/catalog.php?record\\_id=12924](http://www.nap.edu/catalog.php?record_id=12924) (last accessed Jun 27, 2012).

<sup>350</sup> SAE World Congress, "Focus B-pillar 'tailor rolled' to 8 different thicknesses," Feb. 24, 2010. Available at <http://www.sae.org/mags/AEI/7695> (last accessed Jun. 10, 2012).

<sup>348</sup> In the CAFE model, improved accessories refers solely to improved engine cooling. However, EPA has included a high efficiency alternator in this category, as well as improvements to the cooling system.

often used in combination with applying new materials.

The second key strategy to reduce mass of an assembly or component involves the substitution of lower density and/or higher strength materials. Material substitution includes replacing materials, such as mild steel, with higher-strength and advanced steels, aluminum, magnesium, and composite materials. In practice, material substitution tends to be quite specific to the manufacturer and situation. Some materials work better than others for particular vehicle components, and a manufacturer may invest more heavily in adjusting to a particular type of advanced material, thus complicating its ability to consider others. The agencies recognize that like any type of mass reduction, material substitution has to be conducted not only with consideration to maintaining equivalent component strength, but also to maintaining all the other attributes of that component, system or vehicle, such as crashworthiness, durability, and noise, vibration and harshness (NVH).

If vehicle mass is reduced sufficiently through application of the two primary strategies of using less material and material substitution described above, secondary mass reduction options may become available. Secondary mass reduction is enabled when the load requirements of a component are reduced as a result of primary mass reduction. If the primary mass reduction reaches a sufficient level, a manufacturer may use a smaller, lighter, and potentially more efficient powertrain while maintaining vehicle acceleration performance. If a powertrain is downsized, a portion of the mass reduction may be attributed to the reduced torque requirement which results from the lower vehicle mass. The lower torque requirement enables a reduction in engine displacement, changes to transmission torque converter and gear ratios, and changes to final drive gear ratio. The reduced powertrain torque enables the downsizing and/or mass reduction of powertrain components and accompanying reduced rotating mass (e.g., for transmission, driveshafts/halfshafts, wheels, and tires) without sacrificing powertrain durability. Likewise, the combined mass reductions of the engine, drivetrain, and body in turn reduce stresses on the suspension components, steering components, wheels, tires, and brakes, which can allow further reductions in the mass of these subsystems. Reducing the unsprung masses such as the brakes, control arms, wheels, and tires further reduce stresses in the suspension

mounting points, which will allow for further optimization and potential mass reduction. However, pickup trucks have towing and hauling requirements which must be taken into account when determining the amount of secondary mass reduction that is possible and so it is less than that of passenger cars.

Ford's MY 2015 F-150 is one example of a light duty manufacturer who has begun producing high volume vehicles with a significant amount of mass reduction identified, specifically 250 to 750 lb per vehicle<sup>351</sup>. The vehicle is an aluminum intensive design and includes an aluminum cab structure, body panels, and suspension components, as well as a high strength steel frame and a smaller, lighter and more efficient engine. The Executive Summary to Ducker Worldwide's 2014 report<sup>352</sup> states that state that the MY 2015 F-150 contains 1080 lbs of aluminum with at least half of this being aluminum sheet and extrusions for body and closures. Ford engine range for its light duty truck fleet includes a 2.7L EcoBoost V-6. It is possible that the strategy of aluminum body panels will be applied to the heavy duty F-250 and F-350 versions when they are redesigned.<sup>353</sup>

EPA recently completed a multi-year study with FEV North America, Inc. on the lightweighting of a light-duty pickup truck, a 2011 GMC Silverado, titled "Mass Reduction and Cost Analysis—Light-Duty Pickup Trucks Model Years 2020–2025."<sup>354</sup> Results contain a cost curve for various mass reduction percentages with the main solution being evaluated for a 21.4 percent (511 kg/1124 lb) mass reduction resulting in an increased direct incremental manufacturing cost of \$2228. In addition, the report outlines the compounding effect that occurs in a vehicle with performance requirements including hauling and towing. Secondary mass evaluation was performed on a component level based on an overall 20 percent vehicle mass reduction. Results revealed 84 kg of the 511 kg, or 20 percent, were from

secondary mass reduction. Information on this study is summarized in SAE paper 2015-01-0559. DOT has also sponsored an on-going pickup truck lightweighting project. This project uses a more recent baseline vehicle, a MY 2014 GMC Silverado, and the project will be finished by early 2016. Both projects will be utilized for the light-duty GHG and CAFE Midterm Evaluation mass reduction baseline characterization and may be used to update assumptions of mass reduction for HD pickups and vans for the final Phase 2 rulemaking.

In order to determine if technologies identified on light duty trucks are applicable to heavy-duty pickups, EPA also contracted with FEV North America, Inc. to perform a scaling study in order to evaluate the technologies identified for the light-duty truck would be applicable for a heavy-duty pickup truck, in this study a Silverado 2500, a Mercedes Sprinter and a Renault Master. This report is currently being drafted and will be peer reviewed and finalized between the proposed rule and the final rule making. The specific results will be presented in the final rulemaking (FRM) and may be used to update assumptions of mass reduction for the FRM.

The RIA for this rulemaking shows that mass reduction is assumed to be part of the strategy for compliance for HD pickups and vans. The assumptions of mass reduction for HD pickups and vans as used in this analysis were taken from the recent light-duty fuel economy/GHG rulemaking for light-duty pickup trucks, though they may be updated for the FRM based upon the on-going EPA and NHTSA lightweighting studies as well as other information received in the interim. The cost and effectiveness assumptions for mass reduction technology are described in the RIA.

#### (ii) Low Rolling Resistance Tires

Tire rolling resistance is the frictional loss associated mainly with the energy dissipated in the deformation of the tires under load and thus influences fuel efficiency and CO<sub>2</sub> emissions. Other tire design characteristics (e.g., materials, construction, and tread design) influence durability, traction (both wet and dry grip), vehicle handling, and ride comfort in addition to rolling resistance. A typical LRR tire's attributes would include: Increased tire inflation pressure, material changes, and tire construction with less hysteresis, geometry changes (e.g., reduced aspect ratios), and reduction in sidewall and tread deflection. These changes would generally be accompanied with

<sup>351</sup> "2008/9 Blueprint for Sustainability," Ford Motor Company. Available at: <http://www.ford.com/go/sustainability> (last accessed February 8, 2010).

<sup>352</sup> "2015 North American Light Vehicle Aluminum Content Study—Executive Summary", June 2014, <http://www.drivealuminum.org/research-resources/PDF/Research/2014/2014-ducker-report> (last accessed February 26, 2015).

<sup>353</sup> <http://www.foxnews.com/leisure/2014/09/30/ford-confirms-increased-aluminum-use-on-next-gen-super-duty-pickups/>.

<sup>354</sup> "Mass Reduction and Cost Analysis—Light-Duty Pickup Trucks Model Years 2020–2025", FEV, North America, Inc., April 2015, Document no. EPA-420-R-15-006.

additional changes to suspension tuning and/or suspension design.

(iii) Aerodynamic Drag Reduction

Many factors affect a vehicle's aerodynamic drag and the resulting power required to move it through the air. While these factors change with air density and the square and cube of vehicle speed, respectively, the overall drag effect is determined by the product of its frontal area and drag coefficient, Cd. Reductions in these quantities can therefore reduce fuel consumption and CO<sub>2</sub> emissions. Although frontal areas tend to be relatively similar within a vehicle class (mostly due to market-competitive size requirements), significant variations in drag coefficient can be observed. Significant changes to a vehicle's aerodynamic performance may need to be implemented during a redesign (e.g., changes in vehicle shape). However, shorter-term aerodynamic reductions, with a somewhat lower effectiveness, may be achieved through the use of revised exterior components (typically at a model refresh in mid-cycle) and add-on devices that currently being applied. The latter list would include revised front and rear fascias,

modified front air dams and rear valances, addition of rear deck lips and underbody panels, and lower aerodynamic drag exterior mirrors.

(6) What Are the Projected Technology Effectiveness Values and Costs

The assessment of the technology effectiveness and costs was determined from a combination of sources. First an assessment was performed by SwRI under contract with the agencies to determine the effectiveness and costs on several technologies that were generally not considered in the Phase 1 GHG rule time frame. Some of the technologies were common with the light-duty assessment but the effectiveness and costs of individual technologies were appropriately adjusted to match the expected effectiveness and costs when implemented in a heavy-duty application. Finally, the agencies performed extensive outreach to suppliers of engine, transmission and vehicle technologies applicable to heavy-duty applications to get industry input on cost and effectiveness of potential GHG and fuel consumption reducing technologies.

To achieve the levels of the proposed standards for gasoline and diesel powered heavy-duty vehicles, a combination of the technologies previously discussed would be required respective to unique gasoline and diesel technologies and their challenges. Although some of the technologies may already be implemented in a portion of heavy-duty vehicles, none of the technologies discussed are considered ubiquitous in the heavy-duty fleet. Also, as would be expected, the available test data show that some vehicle models would not need the full complement of available technologies to achieve the proposed standards. Furthermore, many technologies can be further improved (e.g., aerodynamic improvements) from today's best levels, and so allow for compliance without needing to apply a technology that a manufacturer might deem less desirable.

Technology costs for HD pickups and vans are shown in Table VI-4. These costs reflect direct and indirect costs to the vehicle manufacturer for the 2021 model year. See Chapter 2 of the Draft RIA for a more complete description of the basis of these costs.

TABLE VI-4—TECHNOLOGY COSTS FOR HD PICKUPS & VANS INCLUSIVE OF INDIRECT COST MARKUPS FOR MY2021 (2012\$)

Technology	Gasoline	Diesel
Engine changes to accommodate low friction lubes .....	\$6	\$6
Engine friction reduction—level 1 .....	116	116
Engine friction reduction—level 2 .....	254	254
Dual cam phasing .....	183	183
Cylinder deactivation .....	196	N/A
Stoichiometric gasoline direct injection .....	451	N/A
Turbo improvements .....	N/A	16
Cooled EGR .....	373	373
Turbocharging & downsizing <sup>a</sup> .....	671	N/A
"Right-sized" diesel from larger diesel .....	N/A	0
8s automatic transmission (increment to 6s automatic transmission) .....	457	457
Improved accessories—level 1 .....	82	82
Improved accessories—level 2 .....	132	132
Low rolling resistance tires—level 1 .....	10	10
Passive aerodynamic improvements (aero 1) .....	51	51
Passive plus Active aerodynamic improvements (aero2) .....	230	230
Electric (or electro/hydraulic) power steering .....	151	151
Mass reduction (10% on a 6500 lb vehicle) .....	318	318
Driveline friction reduction .....	139	139
Stop-start (no regenerative braking) .....	539	539
Mild HEV .....	2,730	2,730
Strong HEV without inclusion of any engine changes .....	6,779	6,779

**Note:**

<sup>a</sup> Cost to downsize from a V8 OHC to a V6 OHC engine with twin turbos.

As noted above, the CAFE model works by adding technologies in an incremental fashion to each particular vehicle in a manufacturer's fleet until that fleet complies with the imposed standards. It does this by following a predefined set of decision trees whereby the particular vehicle is placed on the

appropriate decision tree and it follows the predefined progression of technology available on that tree. At each step along the tree, a decision is made regarding the cost of a given technology relative to what already exists on the vehicle along with the fuel consumption improvement it provides

relative to the fuel consumption at the current location on the tree, prior to deciding whether to take that next step on the tree or remain in the current location. Because the model works in this way, the input files must be structured to provide costs and effectiveness values for each technology

relative to whatever technologies have been added in earlier steps along the tree. Table VI–5 presents the cost and

effectiveness values used in the CAFE model input files.

TABLE VI–5—CAFE MODEL INPUT VALUES FOR COST & EFFECTIVENESS FOR GIVEN TECHNOLOGIES <sup>a</sup>

Technology	FC savings (%)	Incremental cost (2012\$) <sup>a b</sup>		
		2021	2025	2027
Improved Lubricants and Engine Friction Reduction .....	1.60	24	24	23
Coupled Cam Phasing (SOHC) .....	3.82	48	43	39
Dual Variable Valve Lift (SOHC) .....	2.47	42	37	34
Cylinder Deactivation (SOHC) .....	3.70	34	30	27
Intake Cam Phasing (DOHC) .....	0.00	48	43	39
Dual Cam Phasing (DOHC) .....	3.82	46	40	37
Dual Variable Valve Lift (DOHC) .....	2.47	42	37	34
Cylinder Deactivation (DOHC) .....	3.70	34	30	27
Stoichiometric Gasoline Direct Injection (OHC) .....	0.50	71	61	56
Cylinder Deactivation (OHV) .....	3.90	216	188	172
Variable Valve Actuation (OHV) .....	6.10	54	47	43
Stoichiometric Gasoline Direct Injection (OHV) .....	0.50	71	61	56
Engine Turbocharging and Downsizing:				
Small Gasoline Engines .....	8.00	518	441	407
Medium Gasoline Engines .....	8.00	– 12	– 62	– 44
Large Gasoline Engines .....	8.00	623	522	456
Cooled Exhaust Gas Recirculation .....	3.04	382	332	303
Cylinder Deactivation on Turbo/downsized Eng. ....	1.70	33	29	26
Lean-Burn Gasoline Direct Injection .....	4.30	1,758	1,485	1,282
Improved Diesel Engine Turbocharging .....	2.51	22	19	18
Engine Friction & Parasitic Reduction:				
Small Diesel Engines .....	3.50	269	253	213
Medium Diesel Engines .....	3.50	345	325	273
Large Diesel Engines .....	3.50	421	397	334
Downsizing of Diesel Engines (V6 to I–4) .....	11.10	0	0	0
8-Speed Automatic Transmission <sup>c</sup> .....	5.00	482	419	382
Electric Power Steering .....	1.00	160	144	130
Improved Accessories (Level 1) .....	0.93	93	83	75
Improved Accessories (Level 2) .....	0.93	57	54	46
Stop-Start System .....	1.10	612	517	446
Integrated Starter-Generator .....	3.20	1,040	969	760
Strong Hybrid Electric Vehicle .....	17.20	3,038	2,393	2,133
Mass Reduction (5%) .....	1.50	0.28	0.24	0.21
Mass Reduction (additional 5%) .....	1.50	0.87	0.75	0.66
Reduced Rolling Resistance Tires .....	1.10	10	9	9
Low-Drag Brakes .....	0.40	106	102	102
Driveline Friction Reduction .....	0.50	153	137	124
Aerodynamic Improvements (10%) .....	0.70	58	52	47
Aerodynamic Improvements (add'l 10%) .....	0.70	193	182	153

**Notes:**

<sup>a</sup> Values for other model years available in CAFE model input files available at NHTSA Web site.

<sup>b</sup> For mass reduction, cost reported on mass basis (per pound of curb weight reduction).

<sup>c</sup> 8 speed automatic transmission costs include costs for high efficiency gearbox and aggressive shift logic whereas those costs were kept separate in prior analyses.

(7) Summary of Alternatives Analysis

The major outputs of the CAFE model analysis are summarized in Table VI–6

and Table VI–7 below for the flat and dynamic baselines, respectively. For a more detailed analysis of the

alternatives, please refer to Section D below as well as the draft RIA.

TABLE VI–6—SUMMARY OF HD PICKUP AND VAN ALTERNATIVES' ANALYSIS—METHOD A USING THE FLAT BASELINE <sup>a</sup>

Alternative	2	3	4	5
Annual Standard Increase .....	2.0%/y	2.5%/y	3.5%/y	4.0%/y
Stringency Increase through MY .....	2025	2027	2025	2025
Total Stringency Increase .....	9.6%	16.2%	16.3%	18.5%
<b>Average Fuel Economy (miles per gallon)</b>				
Required .....	19.05	20.58	20.58	21.14
Achieved .....	19.12	20.58	20.83	21.32

TABLE VI-6—SUMMARY OF HD PICKUP AND VAN ALTERNATIVES' ANALYSIS—METHOD A USING THE FLAT BASELINE <sup>a</sup>—Continued

Alternative	2	3	4	5
<b>Average Fuel Consumption (gallons/100 mi.)</b>				
Required .....	5.25	4.86	4.86	4.73
Achieved .....	5.23	4.86	4.80	4.69
<b>Average Greenhouse Gas Emissions (g/mi)</b>				
Required .....	495	458	458	446
Achieved .....	493	458	453	442
<b>Incremental Technology Cost (vs. No-Action)</b>				
Average (\$/vehicle) <sup>b</sup> .....	700	1,324	1,804	2,135
Payback period (m) <sup>b</sup> .....	24	26	34	36
Total (\$m) .....	529	1,001	1,363	1,614
<b>Benefit-Cost Summary, MYs 2021–2030 (\$billion) <sup>c</sup></b>				
Fuel Savings (bil. gal.) .....	6.1	10.1	11.9	13.3
CO <sub>2</sub> Reduction (mmt) .....	73	118	139	155
Total Social Cost .....	3.3	5.6	8.7	10.2
Total Social Benefit .....	18.4	29.0	34.4	37.9
Net Social Benefit .....	15.1	23.4	25.7	27.7

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Values also used in Method B.

<sup>c</sup>At a 3% discount rate.

TABLE VI-7—SUMMARY OF HD PICKUP AND VAN ALTERNATIVES' ANALYSIS—METHOD A USING THE DYNAMIC BASELINE <sup>a</sup>

Alternative	2	3	4	5
Annual Standard Increase .....	2.0%/y	2.5%/y	3.5%/y	4.0%/y
Stringency Increase through MY .....	2025	2027	2025	2025
Total Stringency Increase .....	9.6%	16.2%	16.3%	18.5%
<b>Average Fuel Economy (miles per gallon)</b>				
Required .....	19.04	20.57	20.57	21.14
Achieved .....	19.14	20.61	20.83	21.27
<b>Average Fuel Consumption (gallons/100 mi.)</b>				
Required .....	5.25	4.86	4.86	4.73
Achieved .....	5.22	4.85	4.80	4.70
<b>Average Greenhouse Gas Emissions (g/mi)</b>				
Required .....	495	458	458	446
Achieved .....	491	458	453	444
<b>Incremental Technology Cost (vs. No-Action)</b>				
Average (\$/vehicle) <sup>b</sup> .....	578	1,348	1,655	2,080
Payback period (m) <sup>b</sup> .....	25	31	34	38
Total (\$m) .....	437	1,019	1,251	1,572
<b>Benefit-Cost Summary, MYs 2021–2030 (\$billion) <sup>c</sup></b>				
Fuel Savings (bil. gal.) .....	5.0	8.9	10.5	11.9
CO <sub>2</sub> Reduction (mmt) .....	59	104	122	139
Total Social Cost .....	3.3	6.8	9.5	13.0
Total Social Benefit .....	14.3	23.6	28.2	32.8
Net Social Benefit .....	11.0	16.8	18.7	19.8

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Values also used in Method B.

<sup>c</sup>At a 3% discount rate.

In general, the proposed standards are projected to cause manufacturers to produce HD pickups and vans that are lighter, more aerodynamic, and more technologically complex across all the alternatives, while social benefits continue to increase across all alternatives. As shown, there is a major difference between the relatively small improvements in required fuel consumption and average incremental technology cost between the alternatives, suggesting that the challenge of improving fuel consumption and CO<sub>2</sub> emissions accelerates as stringency increases (*i.e.*, that there may be a “knee” in the dependence of the challenge and on the stringency). Despite the fact that the required average fuel consumption level only changes by 3 percent between Alternative 4 and Alternative 5, average technology cost increases by more than 25 percent.

Note further that the difference in estimated costs, effectiveness, degree of technology penetration required, and overall benefits do not vary significantly under either the flat or dynamic baseline assumptions. The agencies view these results as corroborative of the basic reasonableness of the approach proposed.

#### (8) Consistency of the Proposed Standards With the Agencies' Respective Legal Authorities

Based on the information currently before the agencies, we believe that Alternative 3 would be maximum feasible and appropriate for this segment for the model years in question. EPA believes this reflects a reasonable consideration of the statutory factors of technology effectiveness, feasibility, cost, lead time, and safety for purposes of CAA sections 202 (a)(1) and (2). NHTSA believes this proposal is maximum feasible under EISA. The agencies have projected a compliance path for the proposed standards showing aggressive implementation of technologies that the agencies consider to be available in the time frame of these rules. Under this approach, manufacturers are expected to implement these technologies at aggressive adoption rates on essentially all vehicles across this sector by 2027 model year. In the case of several of these technologies, adoption rates are projected to approach 100 percent. This includes a combination of engine, transmission and vehicle technologies as described in this section across every vehicle. The proposal also is premised on less aggressive penetration of particular advanced technologies,

including strong hybrid electric vehicles.

We project the proposed standards to be achievable within known design cycles, and we believe these standards would allow different paths to compliance in addition to the one we outline and cost here. As discussed below and throughout this analysis, our proposal places a higher value on maintaining functionality and capability of vehicles designed for work (versus light-duty), and on the assurance of in use reliability and market acceptance of new technology, particularly in initial model years of the program. Nevertheless, it may be possible to have additional adoption rates of the technologies than we project so that further reductions could be available at reasonable cost and cost-effectiveness.

Alternative 4 is also discussed in detail below because the agencies believe it has the potential to be the maximum feasible alternative, and otherwise appropriate. The agencies could decide to adopt Alternative 4, in whole or in part, in the final rule. In particular, the agencies believe Alternative 4, which would achieve the same stringency as the proposed standards with two years less lead time, merits serious consideration. However, the agencies are uncertain whether the projected technologies and market penetration rates that could be necessary to meet the stringencies would be practicable within the lead time provided in Alternative 4. The proposed standards are generally designed to achieve the levels of fuel consumption and GHG stringency that Alternative 4 would achieve, but with several years of additional lead time, meaning that manufacturers could, in theory, apply new technology at a more gradual pace and with greater flexibility. The agencies seek comment on these alternatives, including their corresponding lead times.

Alternative 4 is based on a year-over-year increase in stringency of 3.5 percent in MYs 2021–2025 whereas the proposed preferred Alternative 3 is based on a 2.5 percent year-over-year increase in stringency in MY 2021–2027. The agencies project that the higher rate of increase in stringency associated with Alternative 4 and the shorter lead time would necessitate the use of a different technology mix under Alternative 4 compared to Alternative 3. Alternative 3 would achieve the same final stringency increase as Alternative 4 at about 80 percent of the average per-vehicle cost increase, and without the expected deployment of more advanced technology at high penetration levels. In particular, under the agencies' primary

analysis that includes the use of strong hybrids manufacturers are estimated to deploy strong hybrids in approximately 8 percent of new vehicles (in MY2027) under Alternative 3, compared to 12 percent under Alternative 4 (in MY 2025). Less aggressive electrification technologies also appear on 33 percent of new vehicles simulated to be produced in MY2027 under Alternative 4, but are not necessary under Alternative 3. Additionally, it is important to note that due to the shorter lead time of Alternative 4, there are fewer vehicle refreshes and redesigns during the phase-in period of MY 2021–2025. While the CAFE model's algorithm accounts for manufacturers' consideration of upcoming stringency changes and credit carry-forward, the steeper ramp-up of the standard in Alternative 4, coupled with the five-year credit life, results in a prediction that manufacturers would take less cost-effective means to comply with the standards compared with the proposed alternative 3 phase-in period of MY 2021–2027. For example, the model predicts that some manufacturers would not implement any amount of strong hybrids on their vans during the 2021–2025 timeframe and instead would implement less effective technologies such as mild hybrids at higher rates than what would otherwise have been required if they had implemented a small percentage of strong hybrids. Whereas for Alternative 3, the longer, shallower phase-in of the standards allows for more compliance flexibility and closer matching with the vehicle redesign cycles, which (as noted above) can be up to ten years for HD vans.

There is also a high degree of sensitivity to the estimated effectiveness levels of individual technologies. At high penetration rates of all technologies on a vehicle, the result of a reduced effectiveness of even a single technology could be non-compliance with the standards. If the standards do not account for this uncertainty, there would be a real possibility that a manufacturer who followed the exact technology path we project would not meet their target because a technology performed slightly differently in their application. NHTSA has explored this uncertainty, among others, in the uncertainty analysis described in Section D below.

As discussed above, the proposed Alternative 3 standards and the Alternative 4 standards are based on the application of the technologies described in this section. These technologies are projected to be available within the lead time provided under Alternative 3—*i.e.*, by MY 2027,

as discussed in Draft RIA Chapter 2.6. The proposed standards and Alternative 4 would require a relatively aggressive implementation schedule of most of these technologies during the program phase-in. Heavy-duty pickups and vans would need to have a combination of many individual technologies to achieve the proposed standards. The proposed standards are projected to yield significant emission and fuel consumption reductions without requiring a large segment transition to strong hybrids, a technology that while

successful in light-duty passenger cars, cross-over vehicles and SUVs, may impact vehicle work capabilities<sup>355</sup> and have questionable customer acceptance in a large portion of this segment dedicated to towing.<sup>356</sup>

Table VI–8 below shows that the agencies' analysis estimates that the most cost-effective way to meet the requirements of Alternative 3 would be to use strong hybrids in up to 9.9 percent of pickups and 5.5 percent of vans on an industry-wide basis whereas Alternative 4 shows strong hybrids on

up to 19 percent of pickups. The analysis shows that the two years of additional lead time provided by the proposed Alternative 3 would provide manufacturers with a better opportunity to maximize the use of more cost effective technologies over time thereby reducing the need for strong hybrids which may be particularly challenging for this market segment. The agencies seek comment on the potential use of technologies in response to Alternatives 3 and 4, as well as the corresponding lead times proposed in each alternative.

TABLE VI–8—CAFE MODEL TECHNOLOGY ADOPTION RATES FOR PROPOSAL AND ALTERNATIVE 4 SUMMARY—FLAT BASELINE

Technology	Proposal (2.5% per year) 2021 to 2027		Alternative 4 (3.5% per year) 2021 to 2025	
	Pickup trucks (%)	Vans (%)	Pickup trucks (%)	Vans (%)
Low friction lubricants .....	100	100	100	100
Engine friction reduction .....	100	100	100	100
Cylinder deactivation .....	22	19	22	19
Variable valve timing .....	22	82	22	82
Gasoline direct injection .....	0	63	0	80
Diesel engine improvements .....	60	3.6	60	3.6
Turbo downsized engine .....	0	63	0	63
8 speed transmission .....	98	92	98	92
Low rolling resistance tires .....	100	92	100	59
Aerodynamic drag reduction .....	100	100	100	100
Mass reduction and materials .....	100	100	100	100
Electric power steering .....	100	49	100	46
Improved accessories .....	100	87	100	36
Low drag brakes .....	100	45	100	45
Stop/start engine systems .....	0	0	15	1.5
Mild hybrid .....	0	0	29	15
Strong hybrid .....	9.9	5.5	19	0

As discussed earlier, the agencies also conducted a sensitivity analysis to determine a compliance pathway where no strong hybrids would be selected. Although the agencies project that strong hybrids may be the most cost effective approach, manufacturers may select another compliance path. This no strong hybrid analysis included the use of downsized turbocharged engine in vans currently equipped with large V–8 engines. Turbo-downsized engines were not allowed on 6+ liter gasoline vans in the primary analysis because the agencies sought to preserve consumer choice with respect to vans that have large V–8s for towing. However, given the recent introduction of vans with considerable towing capacity and turbo-downsized engines, the agencies believe

it would be feasible for vans in the time-frame of these proposed rules. Table VI–9 below reflects the difference in penetration rates of technologies for the proposal and Alternative 4 if strong hybridization is not chosen as a technology pathway. For simplicity, pickup trucks and vans are combined into a single industry wide penetration rate. While strong hybridization may provide the most cost effective path for a manufacturer to comply with the Proposal or Alternative 4, there are other means to comply with the requirements, mainly a 20 percent penetration rate of mild hybrids for the Proposal or a 66 percent penetration of mild hybrids for Alternative 4. The modeling of both alternatives predicts a

1 to 4 percent penetration of stop/start engine systems.

The table also shows that when strong hybrids are used as a pathway to compliance, penetration rates of all hybrid technologies increase substantially between the proposal and Alternative 4. The analysis predicts an increase in strong hybrid penetration from 8 percent to 12 percent, a 23 percent penetration of mild hybrids and a 10 percent penetration stop/start engine systems for Alternative 4 compared with the proposal. Also, by having the final standards apply in MY2027 instead of MY2025, the proposal is not premised on use of any mild hybrids or stop/start engine systems to achieve the same level of stringency as Alternative 4.

<sup>355</sup> Hybrid batteries, motors and electronics generally add weight to a vehicle and require more space which can result in conflicts with payload weight and volume objectives.

<sup>356</sup> Hybrid electric systems are not sized for situations when vehicles are required to do trailer towing where the combined weight of vehicle and trailer is 2 to 4 times that of the vehicle alone. During these conditions, the hybrid system will

have reduced effectiveness. Sizing the system for trailer towing is prohibitive with respect to hybrid component required sizes and the availability of locations to place larger components like batteries.



TABLE VI-9—CAFE MODEL TECHNOLOGY ADOPTION RATES FOR PROPOSAL AND ALTERNATIVE 4 COMBINED FLEET AND FUELS SUMMARY—FLAT BASELINE

Technology	Proposal (2.5% per year) 2021 to 2027		Alternative 4 (3.5% per year) 2021 to 2025	
	With strong hybrids (%)	Without strong hybrids (%)	With strong hybrids (%)	Without strong hybrids (%)
Low friction lubricants .....	100	100	100	100
Engine friction reduction .....	100	100	100	100
Cylinder deactivation .....	21	22	21	14
Variable valve timing .....	46	46	46	46
Gasoline direct injection .....	25	45	31	45
Diesel engine improvements .....	38	38	38	38
Turbo downsized engine <sup>a</sup> .....	25	31	25	31
8 speed transmission .....	96	96	96	96
Low rolling resistance tires .....	97	97	84	84
Aerodynamic drag reduction .....	100	100	100	100
Mass reduction and materials .....	100	100	100	100
Electric power steering .....	80	92	79	79
Improved accessories .....	67	77	75	75
Low drag brakes .....	78	93	78	78
Stop/start engine systems .....	0	1	10	4
Mild hybrid .....	0	20	23	66
Strong hybrid .....	8	0	12	0

**Note:**

<sup>a</sup> The 6+ liter V8 vans were allowed to convert to turbocharged and downsized engines in the “without strong hybrid” analysis for both the Proposal and the Alternative 4 to provide a compliance path.

Table VI-10 and Table VI-11 below provide a further breakdown of projected technology adoption rates specifically for gasoline-fueled pickups and vans which shows potential adoption rates of strong hybrids for each vehicle type. Strong hybrids are not projected to be used in diesel applications. The Alternative 4 analysis

shows the use of strong hybrids in up to 48 percent of gasoline pickups, depending on the mix of strong and mild hybrids, and stop/start engine systems in 20 percent of gasoline pickups (the largest gasoline HD segment). It is important to note that this analysis only shows one pathway to compliance, and the manufacturers may

make other decisions, *e.g.*, changing the mix of strong vs. mild hybrids, or applying electrification technologies to HD vans instead. The technology adoption rates projected for gasoline pickups and gasoline vans due to the proposed Alternative 3 and Alternative 4 are shown in Table VI-10 and Table VI-11, respectively.

TABLE VI-10—CAFE MODEL TECHNOLOGY ADOPTION RATES FOR PROPOSAL AND ALTERNATIVE 4 ON GASOLINE PICKUP TRUCKS—FLAT BASELINE

Technology	Proposal (2.5% per year) 2021 to 2027		Alternative 4 (3.5% per year) 2021 to 2025	
	With strong hybrids (%)	Without strong hybrids (%)	With strong hybrids (%)	Without strong hybrids (%)
Low friction lubricants .....	100	100	100	100
Engine friction reduction .....	100	100	100	100
Cylinder deactivation .....	56	56	56	56
Variable valve timing .....	56	56	56	56
Gasoline direct injection .....	0	56	0	56
8 speed transmission .....	100	100	100	100
Low rolling resistance tires .....	100	100	100	100
Aerodynamic drag reduction .....	100	100	100	100
Mass reduction and materials .....	100	100	100	100
Electric power steering .....	100	100	100	100
Improved accessories .....	100	100	100	100
Low drag brakes .....	100	100	100	100
Driveline friction reduction .....	44	68	68	68
Stop/start engine systems .....	0	0	20	0
Mild hybrid .....	Up to 42 <sup>a</sup>	0%	18–86 <sup>a</sup>	86
Strong hybrid .....	Up to 25		Up to 48	

**Note:**

<sup>a</sup> Depending on extent of strong hybrid adoption as hybrid technologies can replace each other, however they will have different effectiveness and costs.

TABLE VI-11—CAFE MODEL TECHNOLOGY ADOPTION RATES FOR PROPOSAL AND ALTERNATIVE 4 ON GASOLINE VANS—FLAT BASELINE

Technology	Proposal (2.5% per year) 2021 to 2027		Alternative 4 (3.5% per year) 2021 to 2025	
	With strong hybrids (%)	Without strong hybrids (%)	With strong hybrids (%)	Without strong hybrids (%)
Low friction lubricants .....	100 .....	100 .....	100 .....	100 .....
Engine friction reduction .....	100 .....	100 .....	100 .....	100 .....
Cylinder deactivation .....	23 .....	3 .....	23 .....	3 .....
Variable valve timing .....	100 .....	100 .....	100 .....	100 .....
Gasoline direct injection .....	57 .....	97 .....	97 .....	97 .....
Turbo downsized engine <sup>a</sup> .....	77 .....	97 .....	77 .....	97 .....
8 speed transmission .....	97 .....	97 .....	97 .....	97 .....
Low rolling resistance tires .....	100 .....	100 .....	60 .....	60 .....
Aerodynamic drag reduction .....	100 .....	100 .....	100 .....	100 .....
Mass reduction and materials .....	100 .....	100 .....	100 .....	100 .....
Electric power steering .....	55 .....	85 .....	53 .....	53 .....
Improved accessories .....	23 .....	38 .....	43 .....	43 .....
Low drag brakes .....	53 .....	89 .....	53 .....	100 .....
Stop/start engine systems .....	0 .....	0 .....	2 .....	0 .....
Mild hybrid .....	Up to 13 <sup>b</sup> .....	13 .....	18 .....	40 .....
Strong hybrid .....	Up to 7 .....	.....	0 .....	.....

**Notes:**

<sup>a</sup> The 6+ liter V8 vans were allowed to convert to turbocharged and downsized engines in the “without strong hybrid” analysis for both the Proposal and the Alternative 4 to provide a compliance path.

<sup>b</sup> Depending on extent of strong hybrid adoption as hybrid technologies can replace each other, however they will have different effectiveness and costs.

The tables above show that many technologies would be at or potentially approach 100 percent adoption rates according to the analysis. If certain technologies turn out to be not well suited for certain vehicle models or less effective than projected, other technology pathways would be needed. The additional lead time provided by the proposed Alternative 3 reduces these concerns because manufacturers would have more flexibility to implement their compliance strategy and are more likely to contain a product redesign cycle necessary for many new technologies to be implemented.

GM may have a particular challenge meeting new standards compared to other manufacturers because their production consists of a larger portion of gasoline-powered vehicles and because they continue to offer a traditional style HD van equipped only with a V-8 engine. Under the strong hybrid analysis for Alternative 3, GM is projected to apply strong hybrids to 46 percent of their HD gasoline pickups and 17 percent their HD gasoline vans. Under Alternative 4, GM is projected to apply a combination of 53 percent strong and 43 percent mild hybrids to their HD gasoline pickups and 44 percent mild hybrids to their HD vans. The no strong hybrid analysis shows that GM could comply without strong hybrids based on the use of turbo downsizing on all of their HD gasoline vans to fully comply with either

Alternative 3 or Alternative 4. As modeled, Alternative 4 would also require GM to additionally utilize several other technologies such as higher penetration of mild hybridization. If GM were to choose to maintain a V-8 version of their current HD van and not fully utilize turbo downsizing, another compliance path such as some use of strong hybrids would be needed. This would also be the case if GM chose not to fully utilize some other technologies under Alternative 4 as well.

In addition to the possibility of an increased level of hybridization, the agencies are also requesting comment on other possible outcomes associated especially with Alternative 4; in particular, the possibility of traditional van designs or other products being discontinued. Several manufacturers now offer or are moving to European style HD vans. Ford, for example, has discontinued its E-series body on frame HD van and has replaced it with the unibody Transit van for MY 2015. While other manufacturers have replaced their traditional style vans with new European style van designs, GM continues to offer the traditional full frame style van with eight cylinder gasoline engines for higher towing capability (up to 16,000 lb GCWR). Typically, the European style vans are equipped with smaller engines offering better fuel consumption and lower CO<sub>2</sub> emissions but with reduced towing

capability, similar to light-duty trucks (though Ford offers a Transit van with a GCWR of 15,000 lb).

The agencies request comment on the potential for Alternative 4 in particular to incentivize GM to discontinue its current traditional style van and replace it with an as yet to be designed European style van similar to its competitor's products. See *Bluewater Network v. EPA*, 370 F. 3d 1, 22 (D.C. Cir. 2004) (standard implementing technology-forcing provision of CAA remanded to EPA for an explanation of why the standard was not based on discontinuation of a particular model); *International Harvester v. Ruckelshaus*, 478 F. 2d 615, 640–41 (D.C. Cir. 1973) (“We are inclined to agree with the Administrator that as long as feasible technology permits the demand for new passenger automobiles to be generally met, the basic requirements of the Act would be satisfied, even though this might occasion fewer models and a more limited choice of engine types”). Such an outcome could limit consumer choice both on the style of van available in the marketplace and on the range of capabilities of the vehicles available. The agencies have not attempted to cost out this possible compliance path. The agencies request comments on the likelihood of this type of redesign as a possible outcome of Alternative 3 and Alternative 4, and whether it would be appropriate. We are especially interested in comments on the potential

impact on consumer choice and the costs associated with this type of wholesale vehicle model replacement.

In addition, another potential outcome of Alternative 4 would be that manufacturers could change the product utility. For example, although GM's traditional van discussed above currently offers similar towing capacity as gasoline pickups, GM could choose to replace engines designed for those towing capacities with small gas or diesel engines. The agencies request comment on the potential for Alternative 4 to lead to this type of compliance approach.

The agencies also request comment on the possibility that Alternative 4 could lead to increased dieselization of the HD pickup and van fleet. Dieselization is not a technology path the agencies included in the analysis for the Phase 1 rule or the Phase 2 proposal but it is something the agencies could consider as a technology path under Alternative 4. As discussed earlier, diesel engines are fundamentally more efficient than gasoline engines providing the same power (even gasoline engines with the technologies discussed above). Alternative 4 could result in manufacturers switching from gasoline engines to diesel engines in certain

challenging segments. However, while technologically feasible, this pathway could cause a distortion in consumer choices and significantly increase the cost of those vehicles, particularly considering Alternative 4 is projected to require penetration of some form of hybridization. Also, if dieselization occurs by manufacturers equipping vehicles with larger diesel engines rather than "right-sized" engines, the towing capability of the vehicles could increase resulting in higher work factors for the vehicles, higher targets, and reduced program benefits. The issue of surplus towing capability is also discussed above in VI.B. (1).

The technologies associated with meeting the proposed standards are estimated to add costs to heavy-duty pickups and vans as shown in Table VI-12 and Table VI-13 for the flat baseline and dynamic baseline, respectively. These costs are the average fleet-wide incremental vehicle costs relative to a vehicle meeting the MY2018 standard in each of the model years shown. Reductions associated with these costs and technologies are considerable, estimated at a 13.6 percent reduction of fuel consumption and CO<sub>2</sub>eq emissions from the MY 2018 baseline for gasoline

and diesel engine equipped vehicles.<sup>357</sup> A detailed cost and cost effectiveness analysis for both the proposed preferred Alternative 3 are provided in Section IX and Chapter 7.1 of the draft RIA. As shown by the analysis, the long-term cost effectiveness of the proposal is similar to that of the Phase 1 HD pickup and van standards and also falls within the range of the cost effectiveness for Phase 2 standards proposed for the other HD sectors.<sup>358</sup> The cost of controls would be fully recovered by the operator due to the associated fuel savings, with a payback period somewhere in the third year of ownership, as shown in Section IX.L of this preamble. Consistent with the agencies' respective statutory authorities under 42 U.S.C. 7521(a) and 49 U.S.C. 32902(k)(2), and based on the agencies' analysis, EPA and NHTSA are proposing Alternative 3. The agencies seek comment on Alternative 4, as we may seek to adopt it in whole or in part in the final rule.

We also show the costs for the potential Alternative 4 standards in Table VI-14 and Table VI-15. As shown, the costs under Alternative 4 would be significantly higher compared to Alternative 3.

TABLE VI-12—HD PICKUPS AND VANS INCREMENTAL TECHNOLOGY COSTS PER VEHICLE PREFERRED ALTERNATIVE VS. FLAT BASELINE  
[2012\$]

	2021	2022	2023	2024	2025	2026	2027
HD Pickups & Vans .....	\$516	\$508	\$791	\$948	\$1,161	\$1,224	\$1,342

TABLE VI-13—HD PICKUPS AND VANS INCREMENTAL TECHNOLOGY COSTS PER VEHICLE PREFERRED ALTERNATIVE VS. DYNAMIC BASELINE  
[2012\$]

	2021	2022	2023	2024	2025	2026	2027
HD Pickups & Vans .....	\$493	\$485	\$766	\$896	\$1,149	\$1,248	\$1,366

TABLE VI-14—HD PICKUPS AND VANS INCREMENTAL TECHNOLOGY COSTS PER VEHICLE ALTERNATIVE 4 VS. FLAT BASELINE  
[2012\$]

	2021	2022	2023	2024	2025	2026	2027
HD Pickups & Vans .....	\$1,050	\$1,033	\$1,621	\$1,734	\$1,825	\$1,808	\$1,841

<sup>357</sup> See Table VI-5.  
<sup>358</sup> Analysis using the MOVES model indicates that the cost effectiveness of these standards is \$95

per ton CO<sub>2</sub> eq removed in MY 2030 (Draft RIA Table 7-31), almost identical to the \$90 per ton CO<sub>2</sub> eq removed (MY 2030) which the agencies found

to be highly cost effective for these same vehicles in Phase 1. See 76 FR 57228.

TABLE VI-15—HD PICKUPS AND VANS INCREMENTAL TECHNOLOGY COSTS PER VEHICLE ALTERNATIVE 4 VS. DYNAMIC BASELINE  
[2012\$]

	2021	2022	2023	2024	2025	2026	2027
HD Pickups & Vans .....	\$909	\$894	\$1,415	\$1,532	\$1,627	\$1,649	\$1,684

*D. DOT CAFE Model Analysis of the Regulatory Alternatives for HD Pickups and Vans*

Considering the establishment of potential HD pickup and van fuel consumption and GHG standards to follow those already in place through model year 2018, the agencies evaluated a range of potential regulatory alternatives. The agencies estimated the extent to which manufacturers might add fuel-saving and CO<sub>2</sub>-avoiding technologies under each regulatory alternative, including the no-action alternative described in Section X. of this proposal. For HD pickups and vans both agencies analyzed two no-action alternatives, where one no-action alternative could be described as a “flat baseline” and the other as a “dynamic baseline”. Please refer to Section X. of this proposal for a complete discussion of the assumptions that underlie these baselines. The agencies then estimated the extent to which additional technology that would be implemented to meet each regulatory alternative would incrementally (compared to the no-action alternative) impact costs to manufacturers and vehicle buyers, physical outcomes such as highway travel, fuel consumption, and greenhouse gas emissions, and economic benefits and costs to vehicle owners and society. The remainder of this section and portions of Sections VII through X present the regulatory alternatives the agencies have considered, summarize the agencies’ analyses, and explain the agencies’ selection of the HD pickup and van preferred alternative defined by today’s proposed standards.

The agencies conducted coordinated and complementary analyses by employing both DOT’s CAFE model and EPA’s MOVES model and other analytical tools to project fuel consumption and GHG emissions impacts resulting from the proposed standards for HD pickups and vans, against both the flat and dynamic baselines. In addition to running the DOT CAFE model to provide per vehicle cost and technology values, NHTSA also used the model to estimate the full range of impacts for pickups and vans, including fuel consumption and GHG emissions, including downstream

vehicular emissions as well as emissions from upstream processes related to fuel production, distribution, and delivery. The CAFE model applies fuel properties (density and carbon content) to estimated fuel consumption in order to calculate vehicular CO<sub>2</sub> emissions, applies per-mile emission factors (in this analysis, from MOVES) to estimated VMT in order to calculate vehicular CH<sub>4</sub> and N<sub>2</sub>O emissions (as well, as discussed below, of non-GHG pollutants), and applies per-gallon upstream emission factors (in this analysis, from GREET) in order to calculate upstream GHG (and non-GHG) emissions. EPA also ran its MOVES model for all HD categories, namely tractors and trailers, vocational vehicles and HD pickups and vans, to develop a consistent set of fuel consumption and CO<sub>2</sub> reductions for all HD categories. The MOVES runs followed largely the procedures described above, with some differences. MOVES used the same technology application rates and costs that are part of the inputs, and used cost per vehicle outputs of the CAFE model to evaluate the proposed standards for HD pickup trucks and vans. The agencies note that these two independent analyses of aggregate costs and benefits both support the proposed standards.

While both agencies fully analyzed the regulatory alternatives against both baselines, NHTSA considered its primary analysis to be based on the dynamic baseline, where certain cost-effective technologies are assumed to be applied by manufacturers to improve fuel efficiency beyond the Phase 1 requirements in the absence of new Phase 2 standards. On the other hand, EPA considered both baselines and EPA’s less dynamic or flat baseline analysis is presented in Sections VII through X of this proposal as well as the draft Regulatory Impact Analysis accompanying this proposal. In Section X both the flat and dynamic baseline analyses are presented for all of the regulatory alternatives.

This section provides a discussion of the CAFE model, followed by the comprehensive results of the CAFE model against the dynamic baseline to show costs, benefits, and environmental impacts of the regulatory alternatives for

HD pickups and vans. This presentation of regulatory analysis is consistent with NHTSA’s presentation of similar analyses conducted in support of the agencies joint light-duty vehicle fuel economy and GHG regulations. The CAFE analysis against the flat baseline as well as EPA’s complementary analysis of GHG impacts, non-GHG impacts, and economic and other impacts using MOVES is presented in Sections VII through IX of this proposal, as well as in the draft Regulatory Impact Analysis accompanying this proposal. These are presented side-by-side with the agencies’ joint analyses of the other heavy-duty sectors (*i.e.*, tractors, trailers, vocational vehicles). The presentation of the EPA analyses of HD pickups and vans in these sections is consistent with the agencies’ presentation of similar analyses conducted as part of the agencies’ joint HD Phase 1 regulations and with EPA’s presentation of similar analyses conducted in support of the agencies’ joint light-duty vehicle fuel economy and GHG regulations. The agencies’ intention for presenting both of these complementary and coordinated analyses is to offer interested readers the opportunity to compare the regulatory alternatives considered for Phase 2 in both the context of our Phase 1 analytical approaches and our light-duty vehicle analytical approaches.

(1) Evaluation of Regulatory Alternatives

As discussed in Section C above, the agencies used DOT’s CAFE model to conduct an analysis of potential standards for HD pickups and vans. The basic operation of the CAFE model was described in section VI.C.2, so will not be repeated here. However, this section provides additional detail on the model operation, inputs, assumptions, and outputs.

DOT developed the CAFE model in 2002 to support the 2003 issuance of CAFE standards for MYs 2005–2007 light trucks. DOT has since significantly expanded and refined the model, and has applied the model to support every ensuing CAFE rulemaking;

- 2006: MYs 2008–2011 light trucks

- 2008: MYs 2011–2015 passenger cars and light trucks (final rule prepared but withheld)
- 2009: MY 2011 passenger cars and light trucks
- 2010: MYs 2012–2016 passenger cars and light trucks (joint rulemaking with EPA)
- 2012: MYs 2017–2021 passenger cars and light trucks (joint rulemaking with EPA)

Past analyses conducted using the CAFE model have been subjected to extensive and detailed review and comment, much of which has informed the model's expansion and refinement. NHTSA's use of the model was considered and supported in *Center for Biological Diversity v. National Highway Traffic Safety Admin.*, 538 F.3d 1172, 1194 (9th Cir. 2008). For further discussion see 76 FR 57198, and the model has been subjected to formal peer review and review by the General Accounting Office (GAO) and National Research Council (NRC). NHTSA makes public the model, source code, and—except insofar as doing so would compromise confidential business information (CBI) manufacturers have provided to NHTSA—all model inputs and outputs underlying published rulemaking analyses.

This analysis reflects several changes made to the model since 2012, when NHTSA used the model to estimate the effects, costs, and benefits of final CAFE standards for light-duty vehicles produced during MYs 2017–2021, and augural standards for MYs 2022–2025. Some of these changes specifically enable analysis of potential fuel consumption standards (and, hence, related CO<sub>2</sub> emissions standards harmonized with fuel consumption standards) for heavy-duty pickups and vans; other changes implement more general improvements to the model. Key changes include the following:

- Expansion and restructuring of model inputs, compliance calculations, and reporting to accommodate standards for heavy-duty pickups and vans, including attribute-based standards involving targets that vary with “work factor”.
- Explicit calculation of test weight, taking into account test weight “bins” and differences in the definition of test weight for light-duty vehicles (curb weight plus 300 pound) and heavy-duty pickups and vans (average of GVWR and curb weight).
- Procedures to estimate increases in payload when curb weight is reduced, increases in towing capacity if GVWR is reduced, and calculation procedures to correspondingly update calculated work factors.

- Expansion of model inputs, procedures, and outputs to accommodate technologies not included in prior analyses.

- Changes to the algorithm used to apply technologies, enabling more explicit accounting for shared vehicle platforms and adoption and “inheritance” of major engine changes.
- Expansion of the Monte Carlo simulation procedures used to perform probabilistic uncertainty analysis.

These changes are reflected in updated model documentation available at NHTSA's Web site, the documentation also providing more information about the model's purpose, scope, structure, design, inputs, operation, and outputs. DOT invites comment on the updated model, and in particular, on the updated handling of shared vehicle platforms, engines, and transmissions, and on the new procedures to estimate changes to test weight, GVWR, and GCWR as vehicle curb weight is reduced.

#### (a) Product Cadence

Past comments on the CAFE model have stressed the importance of product cadence—*i.e.*, the development and periodic redesign and freshening of vehicles—in terms of involving technical, financial, and other practical constraints on applying new technologies, and DOT has steadily made changes to the model with a view toward accounting for these considerations. For example, early versions of the model added explicit “carrying forward” of applied technologies between model years, subsequent versions applied assumptions that most technologies would be applied when vehicles are freshened or redesigned, and more recent versions applied assumptions that manufacturers would sometimes apply technology earlier than “necessary” in order to facilitate compliance with standards in ensuing model years. Thus, for example, if a manufacturer is expected to redesign many of its products in model years 2018 and 2023, and the standard's stringency increases significantly in model year 2021, the CAFE model will estimate the potential that the manufacturer will add more technology than necessary for compliance in MY 2018, in order to carry those product changes forward through the next redesign and contribute to compliance with the MY 2021 standard.

The model also accommodates estimates of overall limits (expressed as “phase-in caps” in model inputs) on the rates at which manufacturers' may practicably add technology to their

respective fleets. So, for example, even if a manufacturer is expected to redesign half of its production in MY 2016, if the manufacturer is not already producing any strong hybrid electric vehicles (SHEVs), a phase-in cap can be specified in order to assume that manufacturer will stop applying SHEVs in MY 2016 once it has done so to at least 3 percent of its production in that model year.

After the light-duty rulemaking analysis accompanying the 2012 final rule regarding post-2016 CAFE standards and related GHG emissions standards, DOT staff began work on CAFE model changes expected to better reflect additional considerations involved with product planning and cadence. These changes, summarized below, interact with preexisting model characteristics discussed above.

#### (b) Platforms and Technology

The term “platform” is used loosely in industry, but generally refers to a common structure shared by a group of vehicle variants. The degree of commonality varies, with some platform variants exhibiting traditional “badge engineering” where two products are differentiated by little more than insignias, while other platforms are used to produce a broad suite of vehicles that bear little outer resemblance to one another.

Given the degree of commonality between variants of a single platform, manufacturers do not have complete freedom to apply technology to a vehicle: while some technologies (*e.g.* low rolling resistance tires) are very nearly “bolt-on” technologies, others involve substantial changes to the structure and design of the vehicle, and therefore necessarily are constant between vehicles that share a common platform. DOT staff has, therefore, modified the CAFE model such that all mass reduction and aero technologies are forced to be constant between variants of a platform. The agencies request comment on the suitability of this viewpoint, and which technologies can deviate from one platform variant to another.

Within the analysis fleet, each vehicle is associated with a specific platform. As the CAFE model applies technology, it first defines a platform “leader” as the vehicle variant of a platform with the highest technology utilization vehicle of mass reduction and aerodynamic technologies. As the vehicle applies technologies, it effectively harmonizes to the highest common denominator of the platform. If there is a tie, the CAFE model begins applying aerodynamic and mass reduction technology to the vehicle with the lowest average sales

across all available model years. If there remains a tie, the model begins by choosing the vehicle with the highest average MSRP across all available model years. The model follows this formulation due to previous market trends suggesting that many technologies begin deployment at the high-end, low-volume end of the market as manufacturers build their confidence and capability in a technology, and later expand the technology across more mainstream product lines.

In the HD pickup and van market, there is a relatively small amount of diversity in platforms produced by manufacturers: typically 1–2 truck platforms and 1–2 van platforms. However, accounting for platforms will take on greater significance in future analyses involving the light-duty fleet, and the agency requests comments on the general use of platforms within CAFE rulemaking.

#### (c) Engine and Transmission Inheritance

In practice, manufacturers are limited in the number of engines and transmissions that they produce. Typically a manufacturer produces a number of engines—perhaps six or eight engines for a large manufacturer—and tunes them for slight variants in output for a variety of car and truck applications. Manufacturers limit complexity in their engine portfolio for much the same reason as they limit complexity in vehicle variants: They face engineering manpower limitations, and supplier, production and service costs that scale with the number of parts produced.

In previous usage of the CAFE model, engines and transmissions in individual models were allowed relative freedom in technology application, potentially leading to solutions that would, if followed, involve unaccounted-for costs associated with increased complexity in the product portfolio. The lack of a constraint in this area allowed the model to apply different levels of technology to the engine in each vehicle at the time of redesign or refresh, independent of what was done to other vehicles using a previously identical engine.

In the current version of the CAFE model, engines and transmissions that are shared between vehicles must apply the same levels of technology in all technologies dictated by engine or transmission inheritance. This forced adoption is referred to as “engine inheritance” in the model documentation.

As with platform-shared technologies, the model first chooses an “engine leader” among vehicles sharing the

same engine. The leader is selected first by the vehicle with the lowest average sales across all available model years. If there is a tie, the vehicle with the highest average MSRP across model years is chosen. The model applies the same logic with respect to the application of transmission changes. As with platforms, this is driven by the concept that vehicle manufacturers typically deploy new technologies in small numbers prior to deploying widely across their product lines.

#### (d) Interactions Between Regulatory Classes

Like earlier versions, the current CAFE model provides for integrated analysis spanning different regulatory classes, accounting both for standards that apply separately to different classes and for interactions between regulatory classes. Light vehicle CAFE standards are specified separately for passenger cars and light trucks. However, there is considerable sharing between these two regulatory classes. Some specific engines and transmissions are used in both passenger cars and light trucks, and some vehicle platforms span these regulatory classes. For example, some sport-utility vehicles are offered in 2WD versions classified as passenger cars and 4WD versions classified as light trucks. Integrated analysis of manufacturers’ passenger car and light truck fleets provides the ability to account for such sharing and reduce the likelihood of finding solutions that could involve impractical levels of complexity in manufacturers’ product lines. In addition, integrated analysis provides the ability to simulate the potential that manufacturers could earn CAFE credits by over complying with one standard and use those credits toward compliance with the other standard (*i.e.*, to simulate credit transfers between regulatory classes).

HD pickups and vans are regulated separately from light-duty vehicles. While manufacturers cannot transfer credits between light-duty and MDHD classes, there is some sharing of engineering and technology between light-duty vehicles and HD pickups and vans. For example, some passenger vans with GVWR over 8,500 lbs are classified as medium-duty passenger vehicles (MDPVs) and thus included in manufacturers’ light-duty truck fleets, while cargo vans sharing the same nameplate are classified as HD vans.

While today’s analysis examines the HD pickup and van fleet in isolation, as a basis for analysis supporting the planned final rule, the agencies intend to develop an overall analysis fleet spanning both the light-duty and HD

pickup and van fleets. Doing so could show some technology “spilling over” to HD pickups and vans due, for example, to the application of technology in response to current light-duty standards. More generally, modeling the two fleets together should tend to more realistically limit the scope and complexity of estimated compliance pathways.

The agencies anticipate that the impact of modeling a combined fleet will primarily arise from engine-transmission inheritance. While platform sharing between the light-duty and MD pickup and van fleets is relatively small (MDPVs aside), there are a number of instances of engine and transmission sharing across the two fleets. When the fleets are modeled together, the agencies anticipate that engine inheritance will be implemented across the combined fleet, and therefore only one engine-transmission leader can be defined across the combined fleet. As with the fleets separately, all vehicles using a shared engine/transmission would automatically adopt technologies adopted by the engine-transmission leader.

The agencies request comment on plans to analyze the light-duty and MD pickup and van fleets jointly in support of planning for the final rule.

#### (e) Phase-In Caps

The CAFE model retains the ability to use phase-in caps (specified in model inputs) as proxies for a variety of practical restrictions on technology application. Unlike vehicle-specific restrictions related to redesign, refreshes or platforms/engines, phase-in caps constrain technology application at the vehicle manufacturer level. They are intended to reflect a manufacturer’s overall resource capacity available for implementing new technologies (such as engineering and development personnel and financial resources), thereby ensuring that resource capacity is accounted for in the modeling process.

In previous CAFE rulemakings, redesign/refresh schedules and phase-in caps were the primary mechanisms to reflect an OEM’s limited pool of available resources during the rulemaking time frame and the years leading up to the rulemaking time frame, especially in years where many models may be scheduled for refresh or redesign. The newly-introduced representation platform-, engine-, and transmission-related considerations discussed above augment the model’s preexisting representation of redesign cycles and accommodation of phase-in caps. Considering these new constraints,

inputs for today's analysis de-emphasize reliance on phase-in caps.

In this application of the CAFE model, phase-in caps are used only for the most advanced technologies included in the analysis, *i.e.*, SHEVs and lean-burn GDI engines, considering that these technologies are most likely to involve implementation costs and risks not otherwise accounted for in corresponding input estimates of technology cost. For these two technologies, the agencies have applied caps that begin at 3 percent (*i.e.*, 3 percent of the manufacturer's production) in MY 2017, increase at 3 percent annually during the ensuing nine years (reaching 30 percent in the MY 2026), and subsequently increasing at 5 percent annually for four years (reaching 50 percent in MY 2030). Note that the agencies did not feel that lean-burn engines were feasible in the timeframe of this rulemaking, so decided to reject any model runs where they were selected. Due to the cost ineffectiveness of this technology, it was never chosen. The agencies request comment on the appropriateness of these phase-in caps as proxies for constraints that, though not monetized by the agencies, nonetheless limit rates at which these two technologies can practicably be deployed, and on the appropriateness of setting inputs to stop applying phase-in caps to other technologies in this analysis. Comments on this issue should provide information supporting any alternative recommended inputs.

#### (f) Impact of Vehicle Technology Application Requirements

Compared to prior analyses of light-duty standards, these model changes, along with characteristics of the HD pickup and van fleet result in some changes in the broad characteristics of the model's application of technology to manufacturers' fleets. First, since the number of HD pickup and van platforms in a portfolio is typically small, compliance with standards may appear especially "lumpy" (compared to previous applications of the CAFE model to the more highly segmented light-duty fleet), with significant over compliance when widespread redesigns precede stringency increases, and/or significant application of carried-forward (aka "banked") credits.

Second, since the use of phase-in caps has been de-emphasized and manufacturer technology deployment remains tied strongly to estimated product redesign and freshening schedules, technology penetration rates may jump more quickly as manufacturers apply technology to high-volume products in their portfolio.

By design, restrictions that enforce commonality of mass reduction and aerodynamic technologies on variants of a platform, and those that enforce engine inheritance, will result in fewer vehicle-technology combinations in a manufacturer's future modeled fleet. These restrictions are expected to more accurately capture the true costs

associated with producing and maintaining a product portfolio.

#### (g) Accounting for Test Weight, Payload, and Towing Capacity

As mentioned above, NHTSA has also revised the CAFE model to explicitly account for the regulatory "binning" of test weights used to certify light-duty fuel economy and HD pickup and van fuel consumption for purposes of evaluating fleet-level compliance with fuel economy and fuel consumption standards. For HD pickups and vans, test weight (TW) is based on adjusted loaded vehicle weight (ALVW), which is defined as the average of gross vehicle weight rating (GVWR) and curb weight (CW). TW values are then rounded, resulting in TW "bins":

ALVW ≤ 4,000 lb.: TW rounded to nearest 125 lb.

4,000 lb. < ALVW ≤ 5,500 lb.: TW rounded to nearest 250 lb.

ALVW > 5,500 lb.: TW rounded to nearest 500 lb.

This "binning" of TW is relevant to calculation of fuel consumption reductions accompanying mass reduction. Model inputs for mass reduction (as an applied technology) are expressed in terms of a percentage reduction of curb weight and an accompanying estimate of the percentage reduction in fuel consumption, setting aside rounding of test weight. Therefore, to account for rounding of test weight, NHTSA has modified these calculations as follows:

$$\Delta FC_{\text{rounded\_TW}} = \Delta TW \times \frac{\Delta FC_{\text{unrounded\_TW}}}{\Delta CW}$$

Where:

$\Delta CW$  = % change in curb weight (from model input),

$\Delta FC_{\text{unrounded\_TW}}$  = % change in fuel consumption (from model input), without TW rounding,

$\Delta TW$  = % change in test weight (calculated), and

$\Delta FC_{\text{rounded\_TW}}$  = % change in fuel consumption (calculated), with TW rounding.

As a result, some applications of vehicle mass reduction will produce no compliance benefit at all, in cases where the changes in ALVW are too small to change test weight when rounding is taken into account. On the other hand, some other applications of vehicle mass reduction will produce significantly more compliance benefit than when rounding is not taken into account, in cases where even small changes in ALVW are sufficient to cause vehicles'

test weights to increase by, *e.g.*, 500 lbs when rounding is accounted for. Model outputs now include initial and final TW, GVWR, and GCWR (and, as before, CW) for each vehicle model in each model year, and the agencies invite comment on the extent to which these changes to account explicitly for changes in TW are likely to produce more realistic estimates of the compliance impacts of reductions in vehicle mass.

In addition, considering that the regulatory alternatives in the agencies' analysis all involve attribute-based standards in which underlying fuel consumption targets vary with "work factor" (defined by the agencies as the sum of three quarters of payload, one quarter of towing capacity, and 500 lb. for vehicles with 4WD), NHTSA has modified the CAFE model to apply

inputs defining shares of curb weight reduction to be "returned" to payload and shares of GVWR reduction to be returned to towing capacity. The standards' dependence on work factor provides some incentive to increase payload and towing capacity, both of which are buyer-facing measures of vehicle utility. In the agencies' judgment, this provides reason to assume that if vehicle mass is reduced, manufacturers are likely to "return" some of the change to payload and/or towing capacity. For this analysis, the agencies have applied the following assumptions:

- GVWR will be reduced by half the amount by which curb weight is reduced. In other words, 50 percent of the curb weight reduction will be returned to payload.

• GCWR will not be reduced. In other words, 100 percent of any GVWR

reduction will be returned to towing capacity.

• GVWR/CW and GCWR/GVWR will not increase beyond levels observed

among the majority of similar vehicles (or, for outlier vehicles, initial values):

TABLE VI-16—RATIOS FOR MODIFYING GVW AND GCW AS A FUNCTION OF MASS REDUCTION

Group	Maximum ratios assumed enabled by mass reduction	
	GVWR/CW	GCWR/GVWR
Unibody .....	1.75	1.50
Gasoline pickups >13k GVWR .....	2.00	1.50
Other gasoline pickups .....	1.75	2.25
Diesel SRW pickups .....	1.75	2.50
All other .....	1.75	2.25

The first of two of these inputs are specified along with standards for each regulatory alternative, and the GVWR/CW and GCWR/GVWR “caps” are specified separately for each vehicle model in the analysis fleet.

In addition, DOT has changed the model to prevent HD pickup and van GVWR from falling below 8,500 lbs when mass reduction is applied (because doing so would cause vehicles to be reclassified as light-duty vehicles), and to treat any additional mass for hybrid electric vehicles as *reducing* payload by the same amount (e.g., if adding a strong HEV package to a vehicle involves a 350 pound penalty, GVWR is assumed to remain unchanged, such that payload is also reduced by 350 lbs).

The agencies invite comment on these methods for estimating how changes in vehicle mass may impact fuel consumption, GVWR, and GCWR, and on corresponding inputs to today’s analysis.

## (2) Development of the Analysis Fleet

As discussed above, both agencies used DOT’s CAFE modeling system to estimate technology costs and application rates under each regulatory alternative, including the no action alternative (which reflects continuation of previously-promulgated standards). Impacts under each of the “action” alternatives are calculated on an incremental basis relative to impacts under the no action alternative. The modeling system relies on many inputs, including an analysis fleet. In order to estimate the impacts of potential standards, it is necessary to estimate the composition of the future vehicle fleet. Doing so enables estimation of the extent to which each manufacturer may need to add technology in response to a given series of attribute-based standards, accounting for the mix and fuel consumption of vehicles in each manufacturer’s regulated fleet. The

agencies create an analysis fleet in order to track the volumes and types of fuel economy-improving and CO<sub>2</sub>-reducing technologies that are already present in the existing vehicle fleet. This aspect of the analysis fleet helps to keep the CAFE model from adding technologies to vehicles that already have these technologies, which would result in “double counting” of technologies’ costs and benefits. An additional step involved projecting the fleet sales into MYs 2019–2030. This represents the fleet volumes that the agencies believe would exist in MYs 2019–2030. The following presents an overview of the information and methods applied to develop the analysis fleet, and some basic characteristics of that fleet.

The resultant analysis fleet is provided in detail at NHTSA’s Web site, along with all other inputs to and outputs from today’s analysis. The agencies invite comment on this analysis fleet and, in particular, on any other information that should be reflected in an analysis fleet used to update the agencies’ analysis for the final rule. Also, the agencies also invites comment on the potential expansion of this analysis fleet such that the impacts of new HD pickup and van standards can be estimated within the context of an integrated analysis of light-duty vehicles and HD pickups and vans, accounting for interactions between the fleets.

### (a) Data Sources

Most of the information about the vehicles that make up the 2014 analysis fleet was gathered from the 2014 Pre-Model Year Reports submitted to EPA by the manufacturers under Phase 1 of Fuel Efficiency and GHG Emission Program for Medium- and Heavy-Duty Trucks, MYs 2014–2018.

The major manufacturers of class 2b and class 3 trucks (Chrysler, Ford and GM) were asked to voluntarily submit updates to their Pre-Model Year

Reports. Updated data were provided by Chrysler and GM. These updated data were used in constructing the analysis fleet for these manufacturers.

The agencies agreed to treat this information as Confidential Business Information (CBI) until the publication of the proposed rule. This information can be made public at this time because by now all MY2014 vehicle models have been produced, which makes data about them essentially public information.

These data (by individual vehicle configuration produced in MY2014) include: Projected Production Volume/ MY2014 Sales, Drive Type, Axle Ratio, Work Factor, Curb Weight, Test Weight,<sup>359</sup> GVWR, GCWR, Fuel Consumption (gal/100 mile), engine type (gasoline or diesel), engine displacement, transmission type and number of gears.

The column “Engine” of the Pre-Model Year report for each OEM was copied to the column “Engine Code” of the vehicle sheet of the CAFE model market data input file. Values of “Engine” were changed to Engine Codes for use in the CAFE model. The codes indicated on the vehicle sheet map the detailed engine data on the engine sheet to the appropriate vehicle on the vehicle sheet of the CAFE model input file.

The column “Trans Class” of the Pre-Model Year report for each OEM was copied to the column “Transmission Code” of the vehicle sheet of the market data input file. Values of “Trans Class” were changed to Transmission Codes for use in the CAFE model. The codes indicated on the vehicle sheet map the detailed transmission data on the transmission sheet to the appropriate vehicle on the vehicle sheet of the CAFE model input file.

In addition to information about each vehicle, the agencies need additional

<sup>359</sup> Chrysler and GM did not provide test weights in their submittals. Test weights were calculated as the average of GVWR and curb weight rounded up to the nearest 100 lb.



information about the fuel economy-improving/CO<sub>2</sub>-reducing technologies already on those vehicles in order to assess how much and which technologies to apply to determine a path toward future compliance. Thus, the agencies augmented this information with publicly-available data that includes more complete technology descriptions. Specific engines and transmissions associated with each manufacturer's trucks were identified using their respective internet sites. Detailed technical data on individual engines and transmissions indicated on the engine sheet and transmission sheet of the CAFE model input file were then obtained from manufacturer internet sites, spec sheets and product literature, Ward's Automotive Group and other commercial internet sites such as cars.com, edmunds.com, and motortrend.com. Specific additional information included:

- "Fuel Economy on Secondary Fuel" was calculated as E85 = .74 gasoline fuel economy, or B20 = .98 diesel fuel economy. These values were duplicated in the columns "Fuel Economy (Ethanol-85)" and "Fuel Economy (Biodiesel-20)" of the CAFE market data input file.

- Values in the columns "Fuel Share (Gasoline)", "Fuel Share (Ethanol-85)", "Fuel Share (Diesel)", and "Fuel Share (Biodiesel-20)" are Volpe assumptions.

- The CAFE model also requires that values of Origin, Regulatory Class, Technology Class, Safety Class, and Seating (Max) be present in the file in order for the model to run. Placeholder values were added in these columns.

- In addition to the data taken from the OEM Pre Model Year submittals, NHTSA added additional data for use by the CAFE model. These included Platform, Refresh Years, Redesign Years, MSRP, Style, Structure and Fuel Capacity.

- MSRP was obtained from web2carz.com and the OEM Web sites.

- Fuel capacity was obtained from OEM spec sheets and product literature.

- The Structure values (Ladder, Unibody) used by the CAFE model were added. These were determined from OEM product literature and the automotive press. It should be noted that the new vans such as the Transit in fact utilize a ladder/unibody structure. Ford product literature uses the term "Uniladder" to describe the structure. Vans based on this structure are noted in the Vehicle Notes column of the NHTSA input file.

- Style values used by the CAFE model were also added: Chassis Cab, Cutaway, Pickup and Van.

#### (b) Vehicle Redesign Schedules and Platforms

Product cadence in the Class 2b and 3 pickup market has historically ranged from 7–9 years between major redesigns. However, due to increasing competitive pressures and consumer demands the agency anticipates that manufacturers will generally shift to shorter design cycles resembling those of the light duty market. Pickup truck manufacturers in the Class 2b and 3 segments are shown to adopt redesign cycles of six years, allowing two redesigns prior to the end of the regulatory period in 2025. The agencies request comment on the anticipated future use of redesign cycles in this product segment.

The Class 2b and 3 van market has changed markedly from five years ago. Ford, Nissan, Ram and Daimler have adopted vans of "Euro Van" appearance, and in many cases now use smaller turbocharged gasoline or diesel engines in the place of larger, naturally-aspirated V8s. The 2014 Model Year used in this analysis represents a period where most manufacturers, with the exception of General Motors, have recently introduced a completely redesigned product after many years. The van segment has historically been one of the slowest to be redesigned of any product segment, with some products going two decades or more between redesigns.

Due to new entrants in the field and increased competition, the agencies anticipate that most manufacturers will increase the pace of product redesigns in the van segment, but that they will continue to trail other segments. The cycle time used in this analysis is approximately ten years between major redesigns, allowing manufacturers only one major redesign during the regulatory period. The agencies request comment on this anticipated product design cycle.

Additional detail on product cadence assumptions for specific manufacturers is located in Chapter 10 of the draft RIA.

#### (c) Sales Volume Forecast

Since each manufacturer's required average fuel consumption and GHG levels are sales-weighted averages of the fuel economy/GHG targets across all model offerings, sales volumes play a critical role in estimating that burden. The CAFE model requires a forecast of sales volumes, at the vehicle model-variant level, in order to simulate the technology application necessary for a manufacturer to achieve compliance in each model year for which outcomes are simulated.

For today's analysis, the agencies relied on the MY 2014 pre-model-year

compliance submissions from manufacturers to provide sales volumes at the model level based on the level of disaggregation in which the models appear in the compliance data. However, the agencies only use these reported volumes without adjustment for MY 2014. For all future model years, we combine the manufacturer submissions with sales projections from the 2014 Annual Energy Outlook Reference Case and IHS Automotive to determine model variant level sales volumes in future years.<sup>360</sup> The projected sales volumes by class that appear in the 2014 Annual Energy Outlook as a result of a collection of assumptions about economic conditions, demand for commercial miles traveled, and technology migration from light-duty pickup trucks in response to the concurrent light-duty CAFE/GHG standards. These are shown in Chapter 2 of the draft RIA.

For this analysis, the agencies have limited this analysis fleet to class 2b and 3 HD pickups and vans. However, especially considering interactions between the light-duty and HD pickup and van fleets (*e.g.*, MDPVs being included in the light-duty fleet), the agencies are evaluating the potential to analyze the fleets in an integrated fashion for the final rule, and invite comment on the extent to which doing so could provide more realistic estimates of the incremental impacts of new standards applicable HD pickups and vans.

The projection of total sales volumes for the Class 2b and 3 market segment was based on the total volumes in the 2014 AEO Reference Case. For the purposes of this analysis, the AEO2014 calendar year volumes have been used to represent the corresponding model-year volumes. While AEO2014 provides enough resolution in its projections to separate the volumes for the Class 2b and 3 segments, the agencies deferred to the vehicle manufacturers and chose to rely on the relative shares present in the pre-model-year compliance data.

The relative sales share by vehicle type (van or pickup truck, in this case) was derived from a sales forecast that the agencies purchased from IHS Automotive, and applied to the total volumes in the AEO2014 projection. Table VI–17 shows the implied shares of the total new 2b/3 vehicle market broken down by manufacturer and vehicle type.

<sup>360</sup> Tables from AEO's forecast are available at <http://www.eia.gov/oiaf/aeo/tablebrowser/>. The agencies also made use of the IHS Automotive Light Vehicle Production Forecast (August 2014).

TABLE VI-17—IHS AUTOMOTIVE MARKET SHARE FORECAST FOR 2b/3 VEHICLES

Manufacturer	Style	Model year market share						
		2015 (%)	2016 (%)	2017 (%)	2018 (%)	2019 (%)	2020 (%)	2021 (%)
Daimler .....	Van .....	3	3	3	3	3	3	3
Fiat .....	Van .....	2	2	2	2	2	2	3
Ford .....	Van .....	16	17	17	17	18	18	18
General Motors .....	Van .....	12	12	11	12	13	13	13
Nissan .....	Van .....	2	2	2	2	2	2	2
Daimler .....	Pickup .....	0	0	0	0	0	0	0
Fiat .....	Pickup .....	14	14	14	14	11	12	12
Ford .....	Pickup .....	28	27	30	30	30	27	26
General Motors .....	Pickup .....	23	23	21	21	21	22	23
Nissan .....	Pickup .....	0	0	0	0	0	0	0

Within those broadly defined market shares, volumes at the manufacturer/model-variant level were constructed by applying the model-variant's share of manufacturer sales in the pre-model-year compliance data for the relevant vehicle style, and multiplied by the total volume estimated for that manufacturer and that style.

After building out a set of initial future sales volumes based on the sources described above, the agencies attempted to incorporate new information about changes in sales mix that would not be captured by either the existing sales forecasts or the simulated technology changes in vehicle platforms. In particular, Ford has announced intentions to phase out their existing Econoline vans, gradually shifting volumes to the new Transit platform for some model variants (notably chassis cabs and cutaways variants) and eliminating offerings outright for complete Econoline vans as

early as model year 2015. In the case of complete Econoline vans, the volumes for those vehicles were allocated to MY2015 Transit vehicles based on assumptions about likely production splits for the powertrains of the new Transit platform. The volumes for complete Econoline vans were shifted at ratios of 50 percent, 35 percent, and 15 percent for 3.7 L, 3.5 L Eco-boost, and 3.2 L diesel, respectively. Within each powertrain, sales were allocated based on the percentage shares present in the pre-model-year compliance data. The chassis cab and cutaway variants of the Econolines were phased out linearly between MY2015 and MY2020, at which time the Econolines cease to exist in any form and all corresponding volume resides with the Transits.

#### (3) Additional Technology Cost and Effectiveness Inputs

In addition to the base technology cost and effectiveness inputs described

in VI. of this preamble, the CAFE model has some additional cost and effectiveness inputs, described as follows.

The CAFE model accommodates inputs to adjust accumulated effectiveness under circumstances when combining multiple technologies could result in underestimation or overestimation of total incremental effectiveness relative to an "unevolved" baseline vehicle. These so-called synergy factors may be positive, where the combination of the technologies results in greater improvement than the additive improvement of each technology, or negative, where the combination of the technologies is lower than the additive improvement of each technology. The synergy factors used in this analysis are described in VI-18.

TABLE VI-18—TECHNOLOGY PAIR EFFECTIVENESS SYNERGY FACTORS FOR HD PICKUPS AND VANS

Technology pair	Adjustment (%)	Technology pair	Adjustment (%)
8SPD/CCPS .....	-4.60	IATC/CCPS .....	-1.30
8SPD/DEACO .....	-4.60	IATC/DEACO .....	-1.30
8SPD/ICP .....	-4.60	IATC/ICP .....	-1.30
8SPD/TRBDS1 .....	4.60	IATC/TRBDS1 .....	1.30
AERO2/SHEV1 .....	1.40	MR1/CCPS .....	0.40
CCPS/IACC1 .....	-0.40	MR1/DCP .....	0.40
CCPS/IACC2 .....	-0.60	MR1/VVA .....	0.40
DCP/IACC1 .....	-0.40	MR2/ROLL1 .....	-0.10
DCP/IACC2 .....	-0.60	MR2/SHEV1 .....	-0.40
DEACD/IATC .....	-0.10	NAUTO/CCPS .....	-1.70
DEACO/IACC2 .....	-0.80	NAUTO/DEACO .....	-1.70
DEACO/MHEV .....	-0.70	NAUTO/ICP .....	-1.70
DEACS/IATC .....	-0.10	NAUTO/SAX .....	-0.40
DTURB/IATC .....	1.00	NAUTO/TRBDS1 .....	1.70
DTURB/MHEV .....	-0.60	ROLL1/AERO1 .....	0.10
DTURB/SHEV1 .....	-1.00	ROLL1/SHEV1 .....	1.10
DVVD/8SPD .....	-0.60	ROLL2/AERO2 .....	0.20
DVVD/IACC2 .....	-0.80	SHFTOPT/MHEV .....	-0.30
DVVD/IATC .....	-0.60	TRBDS1/MHEV .....	0.80
DVVD/MHEV .....	-0.70	TRBDS1/SHEV1 .....	-3.30
DVVL/8SPD .....	-0.60	TRBDS1/VVA .....	-8.00
DVVL/IACC2 .....	-0.80	TRBDS2/EPS .....	-0.30
DVVL/IATC .....	-0.50	TRBDS2/IACC2 .....	-0.30
DVVL/MHEV .....	-0.70	TRBDS2/NAUTO .....	-0.50
.....	.....	VVA/IACC1 .....	-0.40
.....	.....	VVA/IACC2 .....	-0.60
.....	.....	VVA/IATC .....	-0.60

The CAFE model also accommodates inputs to adjust accumulated incremental costs under circumstances when the application sequence could result in underestimation or overestimation of total incremental costs relative to an "unevolved" baseline vehicle. For today's analysis, the agencies have applied one such adjustment, increasing the cost of medium-sized gasoline engines by \$513

in cases where turbocharging and engine downsizing is applied with variable valve actuation.

The analysis performed using Method A also applied cost inputs to address some costs encompassed neither by the agencies' estimates of the direct cost to apply these technologies, nor by the agencies' methods for "marking up" these costs to arrive at increases in the new vehicle purchase costs. To account

for the additional costs that could be incurred if a technology is applied and then quickly replaced, the CAFE model accommodates inputs specifying a "stranded capital cost" specific to each technology. For this analysis, the model was run with inputs to apply about \$78 of additional cost (per engine) if gasoline engine turbocharging and downsizing (separately for each "level" considered) is applied and then

immediately replaced, declining steadily to zero by the tenth model year following initial application of the technology. The model also accommodates inputs specifying any additional changes owners might incur in maintenance and post-warranty repair costs. For this analysis, the model was run with inputs indicating that vehicles equipped with less rolling-resistant tires could incur additional tire replacement costs equivalent to \$21–\$23 (depending on model year) in additional costs to purchase the new vehicle. The agencies did not, however, include inputs specifying any potential changes repair costs that might accompany application of any of the above technologies. A sensitivity analysis using Method A, discussed below, includes a case in which repair costs are estimated using factors consistent with those underlying the indirect cost multipliers used to mark up direct costs for the agencies' central analysis.

The agencies invite comment on all efficacy and cost inputs involved in today's analysis and request that commenters provide any additional data or forward-looking estimates that could be used to support alternative inputs, including those related to costs beyond those reflected in the cost to purchase new vehicles.

#### (4) Other Analysis Inputs

In addition to the inputs summarized above, the analysis of potential standards for HD pickups and vans makes use of a range of other estimates and assumptions specified as inputs to the CAFE modeling system. Some significant inputs (e.g., estimates of future fuel prices) also applicable to other MDHD segments are discussed below in Section IX. Others more specific to the analysis of HD pickups and vans are as follows:

##### (a) Vehicle Survival and Mileage Accumulation:

Today's analysis estimates the travel, fuel consumption, and emissions over the useful lives of vehicles produced during model years 2014–2030. Doing so requires initial estimates of these vehicles' survival rates (*i.e.*, shares expected to remain in service) and mileage accumulation rates (*i.e.*, anticipated annual travel by vehicles remaining in service), both as a function of vehicle vintage (*i.e.*, age). These estimates are based on an empirical analysis of changes in the fleet of registered vehicles over time, in the case of survival rates, and usage data collected as part of the last Vehicle In Use Survey (the 2002 VIUS), in the case of mileage accumulation.

##### (b) Rebound Effect

Expressed as an elasticity of mileage accumulation with respect to the fuel cost per mile of operation, the agencies have applied a rebound effect of 10 percent for today's analysis.

##### (c) On-Road "Gap"

The model was run with a 20 percent adjustment to reflect differences between on-road and laboratory performance.

##### (d) Fleet Population Profile

Though not reported here, cumulative fuel consumption and CO<sub>2</sub> emissions are presented in the accompanying draft EIS, and these calculations utilize estimates of the numbers of vehicles produced in each model year remaining in service in calendar year 2014. The initial age distribution of the registered vehicle population in 2014 is based on vehicle registration data acquired by NHTSA from R.L. Polk Company.

##### (e) Past Fuel Consumption Levels

Though not reported here, cumulative fuel consumption and CO<sub>2</sub> emissions are presented in the accompanying draft EIS, and these calculations require estimates of the performance of vehicles produced prior to model year 2014. Consistent with AEO 2014, the model was run with the assumption that gasoline and diesel HD pickups and vans averaged 14.9 mpg and 18.6 mpg, respectively, with gasoline versions averaging about 48 percent of production.

##### (f) Long-Term Fuel Consumption Levels

Though not reported here, longer-term estimates of fuel consumption and emissions are presented in the accompanying draft EIS. These estimates include calculations involving vehicle produced after MY 2030 and, consistent with AEO 2014, the model was run with the assumption that fuel consumption and CO<sub>2</sub> emission levels will continue to decline at 0.05 percent annually (compounded) after MY 2030.

##### (g) Payback Period

To estimate in what sequence and to what degree manufacturers might add fuel-saving technologies to their respective fleets, the CAFE model iteratively ranks remaining opportunities (*i.e.*, applications of specific technologies to specific vehicles) in terms of effective cost, primary components of which are the technology cost and the avoided fuel outlays, attempting to minimize

effective costs incurred.<sup>361</sup> Depending on inputs, the model also assumes manufacturers may improve fuel consumption beyond requirements insofar as doing so will involve applications of technology at negative effective cost—*i.e.*, technology application for which buyers' up-front costs are quickly paid back through avoided fuel outlays. This calculation includes only fuel outlays occurring within a specified payback period. For this analysis, a payback period of 6 months was applied for the dynamic baseline case, or Alternative 1b. Thus, for example, a manufacturer already in compliance with standards is projected to apply a fuel consumption improvement projected to cost \$250 (*i.e.*, as a cost that could be charged to the buyer at normal profit to the manufacturer) and reduce fuel costs by \$500 in the first year of vehicle operation. The agencies have conducted the same analysis applying a payback period of 0 months for the flat baseline case, or Alternative 1a.

##### (h) Civil Penalties

EPCA and EISA require that a manufacturer pay civil penalties if it does not have enough credits to cover a shortfall with one or both of the light-duty CAFE standards in a model year. While these provisions do not apply to HD pickups and vans, at this time, the CAFE model will show civil penalties owed in cases where available technologies and credits are estimated to be insufficient for a manufacturer to achieve compliance with a standard. These model-reported estimates have been excluded from this analysis.

##### (i) Coefficients for Fatality Calculations

Today's analysis considered the potential effects on crash safety of the technologies manufacturers may apply to their vehicles to meet each of the regulatory alternatives. NHTSA research has shown that vehicle mass reduction affects overall societal fatalities associated with crashes<sup>362</sup> and, most relevant to this proposal, mass reduction in heavier light- and medium-duty vehicles has an overall beneficial effect on societal fatalities. Reducing the mass of a heavier vehicle involved in a crash with another vehicle(s) makes it less likely there will be fatalities among the occupants of the other vehicles. In addition to the effects of mass reduction, the analysis anticipates that

<sup>361</sup> Volpe CAFE Model, available at <http://www.nhtsa.gov/fuel-economy>.

<sup>362</sup> U.S. DOT/NHTSA, *Relationships Between Fatality Risk Mass and Footprint in MY 2000–2007 PC and LTVs*, ID: NHTSA–2010–0131–0336, Posted August 21, 2012.

the proposed standards, by reducing the cost of driving HD pickups and vans, would lead to increased travel by these vehicles and, therefore, more crashes involving these vehicles. The Method A analysis considers overall impacts considering both of these factors, using a methodology similar to NHTSA's analyses for the MYs 2017–2025 CAFE and GHG emission standards.

The Method A analysis includes estimates of the extent to which HD pickups and vans produced during MYs 2014–2030 may be involved in fatal crashes, considering the mass, survival, and mileage accumulation of these vehicles, taking into account changes in mass and mileage accumulation under each regulatory alternative. These calculations make use of the same coefficients applied to light trucks in the MYs 2017–2025 CAFE rulemaking analysis. Baseline rates of involvement in fatal crashes are 13.03 and 13.24 fatalities per billion miles for vehicles with initial curb weights above and below 4,594 lbs, respectively. Considering that the data underlying the corresponding statistical analysis included observations through calendar year 2010, these rates are reduced by 9.6 percent to account for subsequent impacts of recent Federal Motor Vehicle Safety Standards (FMVSS) and anticipated behavioral changes (*e.g.*, continued increases in seat belt use). For vehicles above 4,594 lbs—*i.e.*, the majority of the HD pickup and van fleet—mass reduction is estimated to reduce the net incidence of highway fatalities by 0.34 percent per 100 lbs of removed curb weight. For the few HD pickups and vans below 4,594 lbs, mass reduction is estimated to increase the net incidence of highway fatalities by 0.52 percent per 100 lbs. Consistent with DOT guidance, the social cost of highway fatalities is estimated using a value of statistical life (VSL) of \$9.36m in 2014, increasing thereafter at 1.18 percent annually.

#### (j) Compliance Credit Provisions

Today's analysis accounts for the potential to over comply with standards and thereby earn compliance credits, applying these credits to ensuring compliance requirements. In doing so, the agencies treat any unused carried-forward credits as expiring after five model years, consistent with current and proposed standards. For today's analysis, the agencies are not estimating the potential to “borrow”—*i.e.*, to carry credits back to past model years.

#### (k) Emission Factors

While CAFE model calculates vehicular CO<sub>2</sub> emissions directly on a

per-gallon basis using fuel consumption and fuel properties (density and carbon content), the model calculates emissions of other pollutants (methane, nitrogen oxides, ozone precursors, carbon monoxide, sulfur dioxide, particulate matter, and air toxics) on a per-mile basis. In doing so, the Method A analysis used corresponding emission factors estimated using EPA's MOVES model.<sup>363</sup> To estimate emissions (including CO<sub>2</sub>) from upstream processes involved in producing, distributing, and delivering fuel, NHTSA has applied emission factors—all specified on a gram per gallon basis—derived from Argonne National Laboratory's GREET model.<sup>364</sup>

#### (l) Refueling Time Benefits

To estimate the value of time savings associated with vehicle refueling, the Method A analysis used estimates that an average refueling event involves refilling 60 percent of the tank's capacity over the course of 3.5 minutes, at an hourly cost of \$27.22.

#### (m) External Costs of Travel

Changes in vehicle travel will entail economic externalities. To estimate these costs, the Method A analysis used estimates that congestion-, accident-, and noise-related externalities will total 5.1 ¢/mi., 2.8 ¢/mi., and 0.1 ¢/mi., respectively.

#### (n) Ownership and Operating Costs

Method A results predict that the total cost of vehicle ownership and operation will change not just due to changes in vehicle price and fuel outlays, but also due to some other costs likely to vary with vehicle price. To estimate these costs, NHTSA has applied factors of 5.5 percent (of price) for taxes and fees, 15.3 percent for financing, 19.2 percent for insurance, 1.9 percent for relative value loss. The Method A analysis also estimates that average vehicle resale value will increase by 25 percent of any increase in new vehicle price.

#### (5) DOT CAFE Model Analysis of Impacts of Regulatory Alternatives for HD Pickups and Vans

##### (a) Industry Impacts

The agencies' analysis fleet provides a starting point for estimating the extent to which manufacturers might add fuel-saving (and, therefore, CO<sub>2</sub>-avoiding) technologies under various regulatory

alternatives, including the no-action alternative that defines a baseline against which to measure estimated impacts of new standards. The analysis fleet is a forward-looking projection of production of new HD pickups and vans, holding vehicle characteristics (*e.g.*, technology content and fuel consumption levels) constant at model year 2014 levels, and adjusting production volumes based on recent DOE and commercially-available forecasts. This analysis fleet includes some significant changes relative to the market characterization that was used to develop the Phase 1 standards applicable starting in model year 2014; in particular, the analysis fleet includes some new HD vans (*e.g.*, Ford's Transit and Fiat/Chrysler's Promaster) that are considerably more fuel-efficient than HD vans these manufacturers have previously produced for the U.S. market.

While the proposed standards are scheduled to begin in model year 2021, the requirements they define are likely to influence manufacturers' planning decisions several years in advance. This is true in light-duty planning, but accentuated by the comparatively long redesign cycles and small number of models and platforms offered for sale in the 2b/3 market segment. Additionally, manufacturers will respond to the cost and efficacy of available fuel consumption improvements, the price of fuel, and the requirements of the Phase 1 standards that specify maximum allowable average fuel consumption and GHG levels for MY2014–MY2018 HD pickups and vans (the final standard for MY2018 is held constant for model years 2019 and 2020). The forward-looking nature of product plans that determine which vehicle models will be offered in the model years affected by the proposed standards lead to additional technology application to vehicles in the analysis fleet that occurs in the years prior to the start of the proposed standards. From the industry perspective, this means that manufacturers will incur costs to comply with the proposed standards in the baseline and that the total cost of the proposed regulations will include some costs that occur prior to their start, and represent incremental changes over a world in which manufacturers will have already modified their vehicle offerings compared to today.

<sup>363</sup> EPA MOVES model available at <http://www.epa.gov/otaq/models/moves/index.htm> (last accessed Feb 23, 2015).

<sup>364</sup> GREET (Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation) Model, Argonne National Laboratory, <https://greet.es.anl.gov/>.

TABLE VI-19—MY2021 BASELINE COSTS FOR MANUFACTURERS IN 2b/3 MARKET SEGMENT IN THE DYNAMIC BASELINE, OR ALTERNATIVE 1b

Manufacturer	Average technology cost (\$)	Total cost increase (\$m)
Chrysler/Fiat .....	275	27
Daimler .....	18	0
Ford .....	258	78
General Motors .....	782	191
Nissan .....	282	3
Industry .....	442	300

As Table VI-19 shows, the industry as a whole is expected to add about \$440 of new technology to each new vehicle model by 2021 under the no-action alternative defined by the Phase 1 standards. Reflecting differences in projected product offerings in the analysis fleet, some manufacturers (notably Daimler) are significantly less constrained by the Phase 1 standards than others and face lower cost increases as a result. General Motors (GM) shows the largest increase in average vehicle cost, but results for GM's closest competitors (Ford and Chrysler/Fiat) do not include the costs of their recent van redesigns, which are already present in the analysis fleet (discussed in greater detail below).

The above results reflect the assumption that manufacturers having achieved compliance with standards might act as if buyers are willing to pay for further fuel consumption improvements that "pay back" within 6 months (*i.e.*, those improvements whose incremental costs are exceeded by savings on fuel within the first six months of ownership). It is also possible that manufacturers will choose not to migrate cost-effective technologies to the 2b/3 market segment from similar vehicles in the light-duty market. To examine this possibility, all regulatory alternatives were also analyzed using the DOT CAFE model (Method A) with a 0-month payback period in lieu of the 6-month payback period discussed above. (A sensitivity analysis using Method A, discussed below, also explores longer payback periods, as well as the combined effect of payback period and fuel price on vehicle design decisions). Resultant technology costs in model year 2021 results for the no-action alternative, summarized in Table VI-20 below, are quite similar to those

shown above for the 6-month payback period. Due to the similarity between the two baseline characterizations, results in the following discussion represent differences relative to only the 6-month payback baseline.

TABLE VI-20—MY2021 BASELINE COSTS FOR HD PICKUPS AND VANS IN THE FLAT BASELINE, OR ALTERNATIVE 1A

Manufacturer	Average technology cost (\$)	Total cost increase (\$m)
Chrysler/Fiat .....	268	27
Daimler .....	0	0
Ford .....	248	75
General Motors .....	767	188
Nissan .....	257	3
Industry .....	431	292

The results below represent the impacts of several regulatory alternatives, including those defined by the proposed standards, as incremental changes over the baseline, where the baseline is defined as the state of the world in the absence of the proposed regulatory action. Large-scale, macroeconomic conditions like fuel prices are constant across all alternatives, including the baseline, as are the fuel economy improvements under the no-action alternative defined by the Phase 1 MDHD rulemaking that covers model years 2014–2018 and is constant from model year 2018 through 2020. In the baseline scenario, the Phase 1 standards are assumed to remain in place and at 2018 levels throughout the analysis (*i.e.* MY 2030). The only difference between the definitions of the alternatives is the stringency of the proposed standards starting in MY 2021 and continuing through either MY 2025 or MY 2027, and all of the differences in outcomes across alternatives are attributable to differences in the standards.

The standards vary in stringency across regulatory alternatives (1–5), but as discussed above, all of the standards are based on the curve developed in the Phase 1 standards that relate fuel economy and GHG emissions to a vehicle's work factor. The alternatives considered here represent different rates of annual increase in the curve defined for model year 2018, growing from a 0 percent annual increase (Alternative 1, the baseline or "no-action" alternative) up to a 4 percent annual increase

(Alternative 5). Table VI-21 shows a summary<sup>365</sup> of outcomes by alternative incremental to the baseline (Alternative 1b) for Model Year 2030<sup>366</sup>, with the exception of technology penetration rates, which are absolute.

The technologies applied by the CAFE model have been grouped (in most cases) to give readers a general sense of which types of technology are applied more frequently than others, and are more likely to be offered in new class 2b/3 vehicles once manufacturers are fully compliant with the standards in the alternative. Model year 2030 was chosen to account for technology application that occurs once the standards have stabilized, but manufacturers are still redesigning products to achieve compliance—generating technology costs and benefits in those model years. The summaries of technology penetration are also intended to reflect the relationship between technology application and cost increases across the alternatives. The table rows present the degree to which specific technologies will be present in new class 2b and class 3 vehicles in 2030, and correspond to: Variable valve timing (VVT) and/or variable valve lift (VVL), cylinder deactivation, direct injection, engine turbocharging, 8-speed automatic transmissions, electric power-steering and accessory improvements, micro-hybridization (which reduces engine idle, but does not assist propulsion), full hybridization (integrated starter generator or strong hybrid that assists propulsion and recaptures braking energy), and aerodynamic improvements to the vehicle shape. In addition to the technologies in the following tables, there are some lower-complexity technologies that have high market penetration across all the alternatives and manufacturers; low rolling-resistance tires, low friction lubricants, and reduced engine friction, for example.

<sup>365</sup> NHTSA generated hundreds of outputs related to economic and environmental impacts, each available technology, and the costs associated with the rule. A more comprehensive treatment of these outputs appears in Chapter 10 of the draft RIA.

<sup>366</sup> The DOT CAFE model estimates that redesign schedules will "straddle" model year 2027, the latest year for which the agencies are proposing increases in the stringency of fuel consumption and GHG standards. Considering also that today's analysis estimates some earning and application of "carried forward" compliance credits, the model was run extending the analysis through model year 2030.

TABLE VI-21—SUMMARY OF HD PICKUPS AND VANS ALTERNATIVES' IMPACT ON INDUSTRY VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1b

Alternative	2	3	4	5
Annual Stringency Increase .....	2.0%/y	2.5%/y	3.5%/y	4.0%/y
Stringency Increase Through MY .....	2025	2027	2025	2025
Total Stringency Increase .....	9.6%	16.2%	16.3%	18.5%
<b>Average Fuel Economy (miles per gallon)</b>				
Required .....	19.04	20.57	20.57	21.14
Achieved .....	19.14	20.61	20.83	21.27
<b>Average Fuel Consumption (gallons/100 mi.)</b>				
Required .....	5.25	4.86	4.86	4.73
Achieved .....	5.22	4.85	4.80	4.70
<b>Average Greenhouse Gas Emissions (g/mi)</b>				
Required .....	495	458	458	446
Achieved .....	491	458	453	444
<b>Technology Penetration (%)</b>				
VVT and/or VVL .....	46	46	46	46
Cylinder Deac .....	29	21	21	21
Direct Injection .....	17	25	31	32
Turbocharging .....	55	63	63	63
8-Speed AT .....	67	96	96	97
EPS, Accessories .....	54	80	79	79
Stop Start .....	0	0	10	13
Hybridization <sup>a</sup> .....	0	8	35	51
Aero. Improvements .....	36	78	78	78
<b>Mass Reduction (vs. No-Action)</b>				
CW (lb.) .....	239	243	325	313
CW (%) .....	3.7	3.7	5.0	4.8
<b>Technology Cost (vs. No-Action)</b>				
Average (\$) <sup>b</sup> .....	578	1,348	1,655	2,080
Total (\$m) <sup>c</sup> .....	437	1,019	1,251	1,572
Payback period (m) <sup>c</sup> .....	25	31	34	38

**Notes:**<sup>a</sup> Includes mild hybrids (ISG) and strong HEVs.<sup>b</sup> Values used in Methods A & B.<sup>c</sup> Values used in Method A, calculated using a 3% discount rate.

In general, the model projects that the standards would cause manufacturers to produce HD pickups and vans that are lighter, more aerodynamic, and more technologically complex across all the alternatives. As Table VI-21 shows, there is a difference between the relatively small increases in required fuel economy and average incremental technology cost between the alternatives, suggesting that the challenge of improving fuel consumption and CO<sub>2</sub> emissions accelerates as stringency increases (*i.e.*, that there may be a “knee” in the relationship between technology cost and reductions in fuel consumption/ GHG emissions). Despite the fact that the required average fuel consumption level changes by about 3 percent between Alternative 4 and Alternative 5,

average technology cost increases by more than 25 percent. These differences help illustrate the clustered character of this market segment, where relatively small increases in fuel economy can lead to much larger cost increases if entire platforms must be changed in response to the standards.

The contrast between alternatives 3 and 4 is even more prominent, with an identical required fuel economy improvement leading to price increases greater than 20 percent based on the more rapid rate of increase and shorter time span of Alternative 4, which achieves all of its increases by MY 2025 while Alternative 3 continues to increase at a slower rate until MY 2027. Despite these differences, the increase in average payback period when moving from Alternative 3 to Alternative 4 to

Alternative 5 is fairly constant at around an additional three months for each jump in stringency.

Manufacturers offer few models, typically only a pickup truck and/or a cargo van, and while there are a large number of variants of each model, the degree of component sharing across the variants can make diversified technology application either economically impractical or impossible. This forces manufacturers to apply some technologies more broadly in order to achieve compliance than they might do in other market segments (passenger cars, for example). This difference between broad and narrow application—where some technologies must be applied to entire platforms, while some can be applied to individual model variants—also explains why

certain technology penetration rates decrease between alternatives of increasing stringency (cylinder deactivation or mass reductions in Table VI-21, for example). For those cases, narrowly applying a more advanced (and costly) technology can be a more cost effective path to compliance and lead to reductions in the amount of lower-complexity technology that is applied.

One driver of the change in technology cost between Alternative 3 and Alternative 4 is the amount of hybridization projected to result from the implementation of the standards. While only about 5 percent full hybridization (defined as either

integrated starter-generator or strong hybrid) is expected to be needed to comply with Alternative 3, the higher rate of increase and compressed schedule moving from Alternative 3 to Alternative 4 is enough to increase the percentage of the fleet adopting full hybridization by a factor of two. To the extent that manufacturers are concerned about introducing hybrid vehicles in the 2b and 3 market, it is worth noting that new vehicles subject to Alternative 3 achieve the same fuel economy as new vehicle subject to Alternative 4 by 2030, with less hybridization required to achieve the improvement.

The alternatives also lead to important differences in outcomes at the

manufacturer level, both from the industry average and from each other. General Motors, Ford, and Chrysler (Fiat), are expected to have approximately 95 percent of the 2b/3 new vehicle market during the years that the proposed standards are being phased in. Due to their importance to this market and the similarities between their model offerings, these three manufacturers are discussed together and a summary of the way each is impacted by the standards appears below in Table VI-22, Table VI-23, and Table VI-24 for General Motors, Ford, and Chrysler/Fiat, respectively.

TABLE VI-22—SUMMARY OF IMPACTS ON GENERAL MOTORS BY 2030 IN THE HD PICKUP AND VAN MARKET VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1b

Alternative	2	3	4	5
Annual Stringency Increase .....	2.0%/y	2.5%/y	3.5%/y	4.0%/y
Stringency Increase Through MY .....	2025	2027	2025	2025
<b>Average Fuel Economy (miles per gallon)</b>				
Required .....	18.38	19.96	20	20.53
Achieved .....	18.43	19.95	20.24	20.51
<b>Average Fuel Consumption (gallons/100 mi.)</b>				
Required .....	5.44	5.01	5	4.87
Achieved .....	5.42	5.01	4.94	4.87
<b>Average Greenhouse Gas Emissions (g/mi)</b>				
Required .....	507	467	467	455
Achieved .....	505	468	461	455
<b>Technology Penetration (%)</b>				
VVT and/or VVL .....	64	64	64	64
Cylinder Deac .....	47	47	47	47
Direct Injection .....	18	18	36	36
Turbocharging .....	53	53	53	53
8-Speed AT .....	36	100	100	100
EPS, Accessories .....	100	100	100	100
Stop Start .....	0	0	2	0
Hybridization .....	0	19	79	100
Aero. Improvements .....	100	100	100	100
<b>Mass Reduction (vs. No-Action)</b>				
CW (lb.) .....	325	161	158	164
CW (%) .....	5.3	2.6	2.6	2.7
<b>Technology Cost (vs. No-Action)</b>				
Average (\$) <sup>a</sup> .....	785	1,706	2,244	2,736
Total (\$m, undiscounted) <sup>b</sup> .....	214	465	611	746

**Notes:**

<sup>a</sup> Values used in Methods A & B.

<sup>b</sup> Values used in Method A, calculated at a 3% discount rate.

TABLE VI-23—SUMMARY OF IMPACTS ON FORD BY 2030 IN THE HD PICKUP AND VAN MARKET VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1b

Alternative	2	3	4	5
Annual Stringency Increase .....	2.0%/y	2.5%/y	3.5%/y	4.0%/y



TABLE VI-23—SUMMARY OF IMPACTS ON FORD BY 2030 IN THE HD PICKUP AND VAN MARKET VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1b—Continued

Alternative	2	3	4	5
Stringency Increase Through MY .....	2025	2027	2025	2025
<b>Average Fuel Economy (miles per gallon)</b>				
Required .....	19.42	20.96	20.92	21.51
Achieved .....	19.5	21.04	21.28	21.8
<b>Average Fuel Consumption (gallons/100 mi.)</b>				
Required .....	5.15	4.77	4.78	4.65
Achieved .....	5.13	4.75	4.70	4.59
<b>Average Greenhouse Gas Emissions (g/mi)</b>				
Required .....	485	449	450	438
Achieved .....	482	447	443	433
<b>Technology Penetration (%)</b>				
VVT and/or VVL .....	34	34	34	34
Cylinder Deac .....	18	0	0	0
Direct Injection .....	16	34	34	34
Turbocharging .....	51	69	69	69
8-Speed AT .....	100	100	100	100
EPS, Accessories .....	41	62	59	59
Stop Start .....	0	0	20	29
Hybridization .....	0	2	14	30
Aero. Improvements .....	0	59	59	59
<b>Mass Reduction (vs. No-Action)</b>				
CW (lb.) .....	210	202	379	356
CW (%) .....	3.2	3	5.7	5.3
<b>Technology Cost (vs. No-Action)</b>				
Average (\$) <sup>a</sup> .....	506	1,110	1,353	1,801
Total (\$m, undiscounted) <sup>b</sup> .....	170	372	454	604

**Notes:**<sup>a</sup> Values used in Methods A & B.<sup>b</sup> Values used in Method A, calculated at a 3% discount rate.

TABLE VI-24—SUMMARY OF IMPACTS ON FIAT/CHRYSLER BY 2030 IN THE HD PICKUP AND VAN MARKET VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1b

Alternative	2	3	4	5
Annual Stringency Increase .....	2.0%/y	2.5%/y	3.5%/y	4.0%/y
Stringency Increase Through MY .....	2025	2027	2025	2025
<b>Average Fuel Economy (miles per gallon)</b>				
Required .....	18.73	20.08	20.12	20.70
Achieved .....	18.83	20.06	20.10	20.70
<b>Average Fuel Consumption (gallons/100 mi.)</b>				
Required .....	5.34	4.98	4.97	4.83
Achieved .....	5.31	4.99	4.97	4.83
<b>Average Greenhouse Gas Emissions (g/mi)</b>				
Required .....	515	480	479	466
Achieved .....	512	481	480	467
<b>Technology Penetration (%)</b>				
VVT and/or VVL .....	40	40	40	40
Cylinder Deac .....	23	23	23	23
Direct Injection .....	17	17	17	17
Turbocharging .....	74	74	74	74

TABLE VI-24—SUMMARY OF IMPACTS ON FIAT/CHRYSLER BY 2030 IN THE HD PICKUP AND VAN MARKET VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1b—Continued

Alternative	2	3	4	5
8-Speed AT .....	65	88	88	88
EPS, Accessories .....	0	100	100	100
Stop-Start .....	0	0	0	0
Hybridization .....	0	3	3	10
Aero. Improvements .....	0	100	100	100
<b>Mass Reduction (vs. No-Action)</b>				
CW (lb.) .....	196	649	648	617
CW (%) .....	2.8	9.1	9.1	8.7
<b>Technology Cost (vs. No-Action)</b>				
Average (\$) <sup>a</sup> .....	434	1,469	1,486	1,700
Total (\$m, undiscounted) <sup>b</sup> .....	48	163	164	188

**Notes:**<sup>a</sup> Values used in Methods A & B.<sup>b</sup> Values used in Method A, calculated at a 3% discount rate.

The fuel consumption and GHG standards require manufacturers to achieve an average level of compliance, represented by a sales-weighted average across the specific targets of all vehicles offered for sale in a given model year, such that each manufacturer will have a unique required consumption/emissions level determined by the composition of its fleet, as illustrated above. However, there are more interesting differences than the small differences in required fuel economy levels among manufacturers. In particular, the average incremental technology cost increases with the stringency of the alternative for each manufacturer, but the size of the cost increase from one alternative to the next varies among them, with General Motors showing considerably larger increases in cost moving from Alternative 3 to Alternative 4, than from either Alternative 2 to Alternative 3 or Alternative 4 to Alternative 5. Ford is estimated to have more uniform cost increases from each alternative to the next, in increasing stringency, though still benefits from the reduced pace and longer period of increase associated with Alternative 3 compared to Alternative 4.

The simulation results show all three manufacturers facing cost increases when the stringency of the standards move from 2.5 percent annual increases over the period from MY 2021–2027 to 3.5 percent annual increases from MY 2021–2025, but General Motors has the largest at 75 percent more than the industry average price increase for Alternative 4. GM also faces higher cost increases in Alternative 2 about 50 percent more than either Ford or Fiat/Chrysler. And for the most stringent

alternative considered, the agencies estimate that General Motors would face average cost increases of more than \$2,700, in addition to the more than \$700 increase in the baseline—approaching nearly \$3,500 per vehicle over today's prices.

Technology choices also differ by manufacturer, and some of those decisions are directly responsible for the largest cost discrepancies. For example, GM is estimated to engage in the least amount of mass reduction among the Big 3 after Phase 1, and much less than Chrysler/Fiat, but reduces average vehicle mass by over 300 lbs in the baseline—suggesting that some of GM's easiest Phase 1 compliance opportunities can be found in lightweighting technologies. Similarly, Chrysler/Fiat is projected to apply less hybridization than the others, and much less than General Motors, which is simulated to have full hybrids (either integrated starter generator or complete hybrid system) on all of its fleet by 2030, nearly 20 percent of which will be strong hybrids, in Alternative 4 and the strong hybrid share decreases to about 18 percent in Alternative 5, as some lower level technologies are applied more broadly. Because the analysis applies the same technology inputs and the same logic for selecting among available opportunities to apply technology, the unique situation of each manufacturer determined which technology path is projected as the most cost-effective.

In order to understand the differences in incremental technology costs and fuel economy achievement across manufacturers in this market segment, it is important to understand the differences in their starting position

relative to the proposed standards. One important factor, made more obvious in the following figures, is the difference between the fuel economy and performance of the recently redesigned vans offered by Fiat/Chrysler and Ford (the Promaster and Transit, respectively), and the more traditionally-styled vans that continue to be offered by General Motors (the Express/Savannah). In MY 2014, Ford began the phase-out of the Econoline van platform, moving those volumes to the Euro-style Transit vans (discussed in more detail in Section VI. D.2). The Transit platform represents a significant improvement over the existing Econoline platform from the perspective of fuel economy, and for the purpose of complying with the standards, the relationship between the Transit's work factor and fuel economy is a more favorable one than the Econoline vans it replaces. Since the redesign of van offerings from both Chrysler/Fiat and Ford occur in (or prior to) the 2014 model year, the costs, fuel consumption improvements, and reductions of vehicle mass associated with those redesigns are included in the analysis fleet, meaning they are not carried as part of the compliance modeling exercise. By contrast, General Motors is simulated to redesign their van offerings after 2014, such that there is a greater potential for these vehicles to incur additional costs attributable to new standards, unlike the costs associated with the recent redesigns of their competitors. The inclusion of these new Ford and Chrysler/Fiat products in the analysis fleet is the primary driver of the cost discrepancy between GM and its competitors in both the baseline and Alternative 2, when Ford and Chrysler/

Fiat have to apply considerably less technology to achieve compliance.

The remaining 5 percent of the 2b/3 market is attributed to two manufacturers, Daimler and Nissan, which, unlike the other manufacturers in this market segment, only produce vans. The vans offered by both manufacturers currently utilize two engines and two transmissions, although both Nissan engines are

gasoline engines and both Daimler engines are diesels. Despite the logical grouping, these two manufacturers are impacted much differently by the proposed standards. For the least stringent alternative considered, Daimler adds no technology and incurs no incremental cost in order to comply with the standards. At stringency increases greater than or equal to 3.5 percent per year, Daimler only really

improves some of their transmissions and improves the electrical accessories of its Sprinter vans. By contrast, Nissan's starting position is much weaker and their compliance costs closer to the industry average in Table VI-21. This difference could increase if the analysis fleet supporting the final rule includes forthcoming Nissan HD pickups.

TABLE VI-25—SUMMARY OF IMPACTS ON DAIMLER BY 2030 IN THE HD PICKUP AND VAN MARKET VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1b

Alternative	2	3	4	5
Annual Stringency Increase .....	2.0%/y	2.5%/y	3.5%/y	4.0%/y
Stringency Increase Through MY .....	2025	2027	2025	2025
<b>Average Fuel Economy (miles per gallon)</b>				
Required .....	23.36	25.19	25.25	25.91
Achieved .....	25.23	25.79	25.79	26.53
<b>Average Fuel Consumption (gallons/100 mi.)</b>				
Required .....	4.28	3.97	3.96	3.86
Achieved .....	3.96	3.88	3.88	3.77
<b>Average Greenhouse Gas Emissions (g/mi)</b>				
Required .....	436	404	404	393
Achieved .....	404	395	395	384
<b>Technology Penetration (%)</b>				
VVT and/or VVL .....	0	0	0	0
Cylinder Deac .....	0	0	0	0
Direct Injection .....	0	0	0	0
Turbocharging .....	44	44	44	44
8-Speed AT .....	0	44	44	100
EPS, Accessories .....	0	0	0	0
Stop-Start .....	0	0	0	0
Hybridization .....	0	0	0	0
Aero. Improvements .....	0	0	0	0
<b>Mass Reduction (vs. No-Action)</b>				
CW (lb.) .....	0	0	0	0
CW (%) .....	0	0	0	0
<b>Technology Cost (vs. No-Action)</b>				
Average (\$) <sup>a</sup> .....	0	165	165	374
Total (\$m, undiscounted) <sup>b</sup> .....	0	4	4	9

**Notes:**

<sup>a</sup> Values used in Methods A & B.

<sup>b</sup> Values used in Method A, calculated at a 3% discount rate.

TABLE VI-26—SUMMARY OF IMPACTS ON NISSAN BY 2030 IN THE HD PICKUP AND VAN MARKET VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1b

Alternative	2	3	4	5
Annual Stringency Increase .....	2.0%/y	2.5%/y	3.5%/y	4.0%/y
Stringency Increase Through MY .....	2025	2027	2025	2025
<b>Average Fuel Economy (miles per gallon)</b>				
Required .....	19.64	21.19	20.92	21.46
Achieved .....	19.84	21.17	21.19	21.51

TABLE VI-26—SUMMARY OF IMPACTS ON NISSAN BY 2030 IN THE HD PICKUP AND VAN MARKET VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1b—Continued

Alternative	2	3	4	5
<b>Average Fuel Consumption (gallons/100 mi.)</b>				
Required .....	5.09	44.72	4.78	4.66
Achieved .....	5.04	4.72	4.72	4.65
<b>Average Greenhouse Gas Emissions (g/mi)</b>				
Required .....	452	419	425	414
Achieved .....	448	419	419	413
<b>Technology Penetration (%)</b>				
VVT and/or VVL .....	100	100	100	100
Cylinder Deac .....	49	49	49	49
Direct Injection .....	51	51	51	100
Turbocharging .....	51	51	51	50
8-Speed AT .....	0	51	51	51
EPS, Accessories .....	0	100	100	100
Stop-Start .....	0	0	0	0
Hybridization .....	0	0	0	28
Aero. Improvements .....	0	100	100	100
<b>Mass Reduction (vs. No-Action)</b>				
CW (lb.) .....	0	0	307	303
CW (%) .....	0	0	5	4.9
<b>Technology Cost (vs. No-Action)</b>				
Average (\$) <sup>a</sup> .....	378	1,150	1,347	1,935
Total (\$m, undiscounted) <sup>b</sup> .....	5	15.1	17.7	25.4

**Notes:**<sup>a</sup> Values used in Methods A & B.<sup>b</sup> Values used in Method A, calculated at a 3% discount rate.

As Table VI-25 and Table VI-26 show, Nissan applies more technology than Daimler in the less stringent alternatives and significantly more technology with increasing stringency. The Euro-style Sprinter vans that comprise all of Daimler's model offerings in this segment put Daimler in a favorable position. However, those vans are already advanced—containing downsized diesel engines and advanced aerodynamic profiles. Much like the Ford Transit vans, the recent improvements to the Sprinter vans occurred outside the scope of the compliance modeling so the costs of the improvements are not captured in the analysis.

Although Daimler's required fuel economy level is much higher than Nissan's (in miles per gallon), Nissan starts from a much weaker position than

Daimler and must incorporate additional engine, transmission, platform-level technologies (e.g. mass reduction and aerodynamic improvements) in order to achieve compliance. In fact, more than 25 percent of Nissan's van offerings are projected to contain integrated starter generators by 2030 in Alternative 5.

While the agencies do not allow sales volumes for any manufacturer (or model) to vary across regulatory alternatives in the analysis, it is conceivable that under the most stringent alternatives individual manufacturers could lose market share to their competitors if the prices of their new vehicles rise more than the industry average without compensating fuel savings and/or changes to other features.

(b) Estimated Owner/Operator Impacts With Respect to HD Pickups and Vans Using Method A

The owner/operator impacts of the proposed rules are more straightforward. Table VI-27 shows the impact on the average owner/operator who buys a new class 2b or 3 vehicle in model year 2030 using the worst case assumption that manufacturers pass through the entire cost of technology to the purchaser. (All dollar values are discounted at a rate of 7 percent per year from the time of purchase, except the average price increase, which occurs at the time of purchase). The additional costs associated with increases in taxes, registration fees, and financing costs are also captured in the table.

TABLE VI-27—SUMMARY OF INDIVIDUAL OWNER/OPERATOR IMPACTS IN MY 2030 IN THE HD PICKUP AND VAN MARKET SEGMENT USING METHOD A AND VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1<sup>b</sup> <sup>a</sup>

Alternative	2	3	4	5
Annual Stringency Increase Increases .....	2.0%/y	2.5%/y	3.5%/y	4.0%/y
Stringency Increase Through MY .....	2025	2027	2025	2025

TABLE VI-27—SUMMARY OF INDIVIDUAL OWNER/OPERATOR IMPACTS IN MY 2030 IN THE HD PICKUP AND VAN MARKET SEGMENT USING METHOD A AND VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1<sup>b</sup> <sup>a</sup>—Continued

Alternative	2	3	4	5
<b>Value of Lifetime Fuel Savings (discounted 2012 dollars)</b>				
Pretax .....	2,068	3,924	4,180	4,676
Tax .....	210	409	438	491
Total .....	2,278	4,334	4,618	5,168
<b>Economic Benefits (discounted 2012 dollars)</b>				
Mobility Benefit .....	244	437	472	525
Avoided Refueling Time .....	86	164	172	193
<b>New Vehicle Purchase (vs. No-Action Alternative)</b>				
Avg. Price Increase (\$) .....	578	1,348	1,655	2,080
Avg. Payback (years) .....	2.5	3	3.4	3.9
Additional costs (\$) .....	120	280	344	432
<b>Net Lifetime Owner/Operator Benefits (discounted \$)</b>				
Total Net Benefits .....	1,910	3,307	3,263	3,374

**Notes:**

\* All dollar values are discounted at a rate of 7 percent per year from the time of purchase, except the average price increase, which occurs at the time of purchase).

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

As expected, an owner/operator's lifetime fuel savings increase monotonically across the alternatives. The mobility benefit in Table VI-27 refers to the value of additional miles that an individual owner/operator travels as a result of reduced per-mile travel costs. The additional miles result in additional fuel consumption and represent foregone fuel savings, but are valued by owner/operators at the cost of the additional fuel plus the owner/operator surplus (a measure of the increase in welfare that owner/operators achieve by having more mobility). The refueling benefit measures the value of time saved through reduced refueling events, the result of improved fuel economy and range in vehicles that

have been modified in response to the standards.

There are some limitations to using payback period as a measure, as it accounts for fuel expenditures and incremental costs associated with taxes, registration fees and financing, and increased maintenance costs, but not the cost of potential repairs or replacements, which may or may not be more expensive with more advanced technology.

Overall, the average owner/operator is likely to see discounted lifetime benefits that are multiples of the price increases faced when purchasing the new vehicle in MY 2030 (or the few model years preceding 2030). In particular, the net present value of future benefits at the

time of purchase are estimated to be 3.5, 3.0, 2.2, and 1.8 times the price increase of the average new MY2030 vehicle for Alternatives 2–5, respectively. As Table VI-27 illustrates, the preferred alternative has the highest ratio of discounted future owner/operator benefits to owner/operator costs.

(c) Estimated Social and Environmental Impacts for HD Pickups and Vans

Social benefits increase with the increasing stringency of the alternatives. As in the owner/operator analysis, the net benefits continue to increase with increasing stringency—suggesting that benefits are still increasing faster than costs for even the most stringent alternative.

TABLE VI-28—SUMMARY OF TOTAL SOCIAL COSTS AND BENEFITS THROUGH MY 2029 IN THE HD PICKUP AND VAN MARKET SEGMENT USING METHOD A AND VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1<sup>b</sup> <sup>a</sup>

Alternative	2	3	4	5
Annual Stringency Increase .....	2.0%	2.5%	3.5%	4.0%
Stringency Increase Through MY .....	2025	2027	2025	2025
<b>Fuel Purchases (\$billion)</b>				
Pretax Savings .....	9.6	15.9	19.1	22.2
<b>Fuel Externalities (\$billion)</b>				
Energy Security .....	0.5	0.9	1.1	1.3
CO <sub>2</sub> emissions <sup>b</sup> .....	1.9	3.2	3.8	4.4
<b>VMT-Related Externalities (\$billion)</b>				
Driving Surplus .....	1.1	1.8	2.1	2.4
Refueling Surplus .....	0.4	0.7	0.8	0.9

TABLE VI-28—SUMMARY OF TOTAL SOCIAL COSTS AND BENEFITS THROUGH MY 2029 IN THE HD PICKUP AND VAN MARKET SEGMENT USING METHOD A AND VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1<sup>b</sup> <sup>a</sup>—Continued

Alternative	2	3	4	5
Congestion .....	-0.2	-0.4	-0.4	-0.5
Accidents .....	-0.1	-0.2	-0.2	-0.3
Noise .....	0	0	0	0
Fatalities .....	0.1	-0.2	-0.2	-0.5
Criteria Emissions .....	0.6	1.1	1.3	1.6
<b>Technology Costs vs. No-Action (\$billion)</b>				
Incremental Cost .....	2.5	5.0	7.2	9.7
Additional Costs .....	0.5	1.0	1.5	2.0
<b>Benefit Cost Summary (\$billion)</b>				
Total Social Cost .....	3.3	6.8	9.5	13.0
Total Social Benefit .....	13.9	22.7	27.4	31.7
Net Social Benefit .....	10.6	15.9	17.9	18.7

**Notes:**

\* All dollar values are discounted at a rate of 3 percent per year from the time of purchase.

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup> Using the 3% average social cost of CO<sub>2</sub> value. There are four distinct social cost of CO<sub>2</sub> values presented in the *Technical Support Document: Social Cost of Carbon for Regulatory Impact Analysis under Executive Order 12866 (2010 and 2013)*. The CO<sub>2</sub> emissions presented here would be valued lower with one of those other three values and higher at the other two values.

Table VI-28 provides a summary of benefits and costs, cumulative from MY2015–MY2029 (although the early years of the series typically have no incremental costs and benefits over the baseline), for each alternative. In the social perspective, fuel savings are considered net of fuel taxes, which are a transfer from purchasers of fuel to society at large. The energy security component represents the risk premium associated with exposure to oil price spikes and the economic consequences of adapting to them. This externality is monetized on a per-gallon basis, just as the social cost of carbon is used in this analysis. Just as the previous two externalities are caused by fuel consumption, others are caused by travel itself. The additional VMT resulting from the increase in travel demand that occurs when the price of driving decreases (*i.e.* the rebound effect), not only leads to increased mobility (which is a benefit to drivers), but also to increases in congestion, noise, accidents, and per-mile emissions of criteria pollutants like carbon monoxide and diesel particulates. Although increases in VMT lead to increases in tailpipe emissions of criteria pollutants, the proposed regulations decrease overall

consumption enough that the emissions reductions associated with the remainder of the fuel cycle (extraction, refining, transportation and distribution) are large enough to create a net reduction in the emissions of criteria pollutants (shown below in Table VI-29 and VI-30).<sup>367</sup> A full presentation of the costs and benefits, and the considerations that have gone into each cost and benefit category—such as how energy security premiums were developed, how the social costs of carbon and co-pollutant benefits were developed, etc.—is presented in Section IX of this preamble and in Chapters 7 and 8 of the draft RIA for each regulated segment (engines, HD pickups and vans, vocational vehicles, tractors and trailers).

Another side effect of increased VMT is the likely increase in crashes, which is a function of the total vehicle travel in each year. Although additional crashes could involve additional fatalities, we estimate that this potential could be partially offset by the application of mass reduction to HD pickup trucks and vans, which could make fatalities less likely in some crashes involving these vehicles. As Table VI-28 illustrates, the social cost associated with traffic fatalities is the

result of an additional –10 (Alternative 2 leads to a reduction in fatalities over the baseline, due to the application of mass reduction technologies), 35, 36, and 66 fatalities for Alternatives 2–5, respectively. The baseline contains nearly 25,000 fatalities involving 2b/3 vehicles over the same period. The incremental fatalities associated with Alternative 2–5 are –0.4, 0.1, 0.1, and 0.3 percent relative to the MYs 2015–2029 baseline, respectively.

The CAFE model was used to estimate the emissions impacts of the various alternatives that are the result of lower fuel consumption, but increased vehicle miles traveled for vehicle produced in model years subject to the standards in the alternatives. Criteria pollutants are largely the result of vehicle use, and accrue on a per-mile-of-travel basis, but the alternatives still generally lead to emissions reductions. Although vehicle use increases under each of the alternatives, upstream emissions associated with fuel refining, transportation and distribution are reduced for each gallon of fuel saved and that savings is larger than the incremental increase in emissions associated with increased travel. The net of the two factors is a savings of criteria (and other) pollutant emissions.

<sup>367</sup> For a more detailed discussion of the results from the CAFE Model on the proposed heavy duty pickups and vans regulation's impact on emissions of CO<sub>2</sub> and criteria pollutants, see NHTSA's accompanying Draft Environmental Impact Statement.

TABLE VI-29—SUMMARY OF ENVIRONMENTAL IMPACTS THROUGH MY2029 IN THE HD PICKUP AND VAN MARKET SEGMENT, USING METHOD A AND VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1b a

Alternative	2	3	4	5
Annual Stringency Increase .....	2.0%	2.5%	3.5%	4.0%
Stringency Increase Through MY .....	2025	2027	2025	2025
<b>Greenhouse Gas Emissions vs. No-Action Alternative</b>				
CO <sub>2</sub> (MMT) .....	54	91	110	127
CH <sub>4</sub> and N <sub>2</sub> O (tons) .....	65,600	111,400	133,700	155,300
<b>Other Emissions vs. No-Action Alternative (tons)</b>				
CO .....	10,400	20,700	25,800	30,400
VOC and NO <sub>x</sub> .....	23,800	43,600	53,500	62,200
PM .....	1,470	2,550	3,090	3,590
SO <sub>2</sub> .....	11,400	19,900	24,100	28,000
Air Toxics .....	44	47	49	55
Diesel PM <sub>10</sub> .....	2,470	4,350	5,300	6,160
<b>Other Emissions vs. No-Action Alternative (% reduction)</b>				
CO .....	0.1	0.3	0.4	0.4
VOC and NO <sub>x</sub> .....	1.1	2.1	2.6	3.0
PM .....	1.7	3.0	3.6	4.2
SO <sub>2</sub> .....	2.9	5.1	6.2	7.2
Air Toxics .....	0.1	0.1	0.1	0.2
Diesel PM <sub>10</sub> .....	2.7	4.8	5.9	6.8

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

In addition to comparing environmental impacts of the alternatives against a dynamic baseline that shows some improvement over

time, compared to today's fleet, even in the absence of the alternatives, the environmental impacts from the Method A analysis were compared against a flat

baseline. This other comparison is summarized below, but both comparisons are discussed in greater detail in the Draft EIS.

TABLE VI-30—SUMMARY OF ENVIRONMENTAL IMPACTS THROUGH MY2029 IN THE HD PICKUP AND VAN MARKET SEGMENT, USING METHOD A AND VERSUS THE FLAT BASELINE, ALTERNATIVE 1<sup>a</sup>

Alternative	2	3	4	5
Annual Stringency Increase .....	2.0%	2.5%	3.5%	4.0%
Stringency Increase Through MY .....	2025	2027	2025	2025
<b>Greenhouse Gas Emissions vs. No-Action Alternative</b>				
CO <sub>2</sub> (MMT) .....	66	105	127	142
CH <sub>4</sub> and N <sub>2</sub> O (tons) .....	79,700	127,400	154,800	172,800
<b>Other Emissions vs. No-Action Alternative (tons)</b>				
CO .....	11,630	22,160	28,030	32,370
VOC and NO <sub>x</sub> .....	28,280	48,770	60,180	68,050
PM .....	1,780	2,900	3,550	3,980
SO <sub>2</sub> .....	13,780	22,580	27,660	31,020
Air Toxics .....	60	65	72	73
Diesel PM <sub>10</sub> .....	2,980	4,930	6,060	6,810
<b>Other Emissions vs. No-Action Alternative (% reduction)</b>				
CO .....	0.2	0.3	0.4	0.4
VOC and NO <sub>x</sub> .....	1.4	2.3	2.9	3.3
PM .....	2.1	3.4	4.2	4.7
SO <sub>2</sub> .....	3.5	5.7	7.0	7.9
Air Toxics .....	0.2	0.2	0.2	0.2
Diesel PM <sub>10</sub> .....	3.3	5.4	6.7	7.5

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

#### (6) Sensitivity Analysis Evaluating Different Inputs to the DOT CAFE Model

This section describes some of the principal sensitivity results, obtained by running the various scenarios describing the policy alternatives with alternative inputs. OMB Circular A-4 indicates that “it is usually necessary to provide a sensitivity analysis to reveal whether, and to what extent, the results of the analysis are sensitive to plausible changes in the main assumptions and numeric inputs.”<sup>368</sup> Considering this guidance, a number of sensitivity analyses were performed using analysis Method A to examine important assumptions and inputs, including the following, all of which are discussed in greater detail in the accompanying RIA:

1. *Payback Period*: In addition to the 0 and 6 month payback periods discussed above, also evaluated cases involving payback periods of 12, 18, and 24 months.

2. *Fuel Prices*: Evaluated cases involving fuel prices from the AEO 2014 low and high oil price scenarios. (See AEO-Low and AEO-High in the tables.)

3. *Fuel Prices and Payback Period*: Evaluated one side case involving a 0 month payback period combined with fuel prices from the AEO 2014 low oil price scenario, and one side case with a 24 month payback period combined with fuel prices from the AEO 2014 high oil price scenario.

4. *Benefits to Vehicle Buyers*: The main Method A analysis assumes there is no loss in value to owner/operators resulting from vehicles that have an increase in price and higher fuel economy. NHTSA performed this sensitivity analysis assuming that there is a 25, or 50 percent loss in value to owner/operators—equivalent to the

assumption that owner/operators will only value the calculated benefits they will achieve at 75, or 50 percent, respectively, of the main analysis estimates. (These are labeled as 75pctOwner/operatorBenefit and 50pctOwner/operatorBenefit.)

5. *Value of Avoided GHG Emissions*: Evaluated side cases involving lower and higher valuation of avoided CO<sub>2</sub> emissions, expressed as the social cost of carbon (SCC).

6. *Rebound Effect*: Evaluated side cases involving rebound effect values of 5 percent, 15 percent, and 20 percent. (These are labeled as 05PctReboundEffect, 15PctReboundEffect and 20PctReboundEffect).

7. *RPE-based Markup*: Evaluated a side case using a retail price equivalent (RPE) markup factor of 1.5 for non-electrification technologies, which is consistent with the NAS estimation for technologies manufactured by suppliers, and a RPE markup factor of 1.33 for electrification technologies (mild and strong HEV).

8. *ICM-based Post-Warranty Repair Costs*: NHTSA evaluated a side case that scaled the frequency of repair by vehicle survival rates, assumes that per-vehicle repair costs during the post-warranty period are the same as in the in-warranty period, and that repair costs are proportional to incremental direct costs (therefore vehicles with additional components will have increased repair costs).

9. *Mass-Safety Effect*: Evaluated side cases with the mass-safety impact coefficient at the values defining the 5th and 95th percent points of the confidence interval estimated in the underlying statistical analysis. (These are labeled MassFatalityCoeff05pct and MassFatalityCoeff95pct.)

10. *Strong HEVs*: Evaluated a side case in which strong HEVs were excluded from the set of technology estimated to be available for HD pickups and vans through model year 2030. As in Section VI.C. (8), this “no SHEV” case allowed turbocharging and downsizing on all GM vans to provide a lower-cost path for compliance.

11. *Diesel Downsizing*: Evaluated a side case in which downsizing of diesel engines was estimated to be more widely available to HD pickups and vans.

12. *Technology Effectiveness*: Evaluated side cases involving inputs reflecting lower and higher impacts of technologies on fuel consumption.

13. *Technology Direct Costs*: Evaluated side cases involving inputs reflecting lower and higher direct incremental costs for fuel-saving technologies.

14. *Fleet Mix*: Evaluated a side case in which the shares of individual vehicle models and configurations were kept constant at estimated current levels.

Table VI-31 below, summarizes key metrics for each of the cases included in the sensitivity analysis using Method A for the proposed alternative. The table reflects the percent change in the metrics (columns) relative to the main analysis, due to the particular sensitivity case (rows) for the proposed alternative 3. For each sensitivity run, the change in the metric can be described as the difference between the baseline and the preferred alternative for the sensitivity case, minus the difference between the preferred alternative and the baseline in the main analysis, divided by the difference between the preferred alternative and the baseline in the main analysis. Or,

$$\text{Table Metric} = \frac{\Delta_{\text{Alt sen case}} - \Delta_{\text{Alt main run}}}{\Delta_{\text{Alt main run}}} \cdot 100$$

Each metric represents the sum of the impacts of the preferred alternative over the model years 2018–2029, and the

percent changes in the table represent percent changes to those sums. More detailed results for all alternatives are

available in the accompanying RIA Chapter 10.

**TABLE VI-31—SENSITIVITY ANALYSIS RESULTS FROM CAFE MODEL IN THE HD PICKUP AND VAN MARKET SEGMENT USING METHOD A AND VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1B (2.5% GROWTH IN STRINGENCY: CELLS ARE PERCENT CHANGE FROM BASE CASE)<sup>A</sup>**

Sensitivity case	Fuel savings (gallons) (%)	CO <sub>2</sub> savings (MMT) (%)	Fuel savings (\$) (%)	Social costs (%)	Social benefits (%)	Social net benefits (%)
0 Month Payback .....	14.0	14.5	15.1	5.6	15.1	18.2

<sup>368</sup> Available at [http://www.whitehouse.gov/omb/circulars\\_a004\\_a-4/](http://www.whitehouse.gov/omb/circulars_a004_a-4/).



TABLE VI-31—SENSITIVITY ANALYSIS RESULTS FROM CAFE MODEL IN THE HD PICKUP AND VAN MARKET SEGMENT USING METHOD A AND VERSUS THE DYNAMIC BASELINE, ALTERNATIVE 1B (2.5% GROWTH IN STRINGENCY: CELLS ARE PERCENT CHANGE FROM BASE CASE)<sup>A</sup>—Continued

Sensitivity case	Fuel savings (gallons) (%)	CO2 savings (MMT) (%)	Fuel savings (\$) (%)	Social costs (%)	Social benefits (%)	Social net benefits (%)
12 Month Payback .....	-4.8	-4.7	-4.5	-2.5	-4.7	-5.4
18 Month Payback .....	-29.2	-28.1	-26.5	-14.1	-26.8	-31.1
24 Month Payback .....	-42.9	-42.4	-41.9	-23.2	-42.1	-48.4
AEO-Low .....	3.3	3.5	-27.9	-10.8	-22.2	-26.1
AEO-High .....	-7.0	-7.2	23.3	1.4	19.5	25.6
AEO-Low, 0 Month Payback .....	18.6	19.3	-16.5	-3.4	-10.1	-12.3
AEO-High, 24 Month Payback .....	-63.8	-64.6	-54.4	-49.9	-55.7	-57.7
50pct Owner/operator Benefit .....	0.0	0.0	-50.0	0.0	-34.6	-46.2
75pct Owner/operator Benefit .....	0.0	0.0	-25.0	0.0	-17.3	-23.1
Low SCC .....	0.0	0.0	0.0	0.0	-10.6	-14.1
Low SCC, 0 Month Payback .....	14.0	14.5	15.1	5.6	2.9	2.0
High SCC .....	0.0	0.0	0.0	0.0	7.8	10.4
High SCC, 0 Month Payback .....	14.0	14.5	15.1	5.6	24.0	30.1
Very High SCC .....	0.0	0.0	0.0	0.0	28.7	38.4
Very High SCC, 0 Month Payback .....	14.0	14.5	15.1	5.6	48.0	62.2
05 Pct Rebound Effect .....	4.6	4.6	4.6	-12.9	0.4	4.8
15 Pct Rebound Effect .....	-4.6	-4.6	-4.6	12.9	-0.4	-4.8
20 Pct Rebound Effect .....	-9.1	-9.2	-9.2	25.7	-0.8	-9.7
RPE-Based Markup .....	-3.2	-1.5	0.3	31.4	-0.1	-10.6
Mass Fatality Coeff 05pct .....	0.0	0.0	0.0	-23.6	0.0	7.9
Mass Fatality Coeff 95pct .....	0.0	0.0	0.0	23.9	0.0	-8.0
NoSHEVs .....	-6.7	-5.8	-5.0	2.3	-5.1	-7.6
NoSHEVs, 0 Month Payback .....	8.2	9.8	11.5	-1.2	11.3	15.4
Lower Effectiveness .....	-7.8	-7.8	-8.1	39.5	-8.0	-23.9
Higher Effectiveness .....	-10.6	-10.3	-10.0	-23.3	-10.2	-5.8
Lower Direct Costs .....	0.9	2.7	4.8	18.4	4.3	-0.4
Higher Direct Costs .....	-4.1	-3.8	-3.5	75.3	-3.8	-30.3
Wider Diesel Downsizing .....	-1.5	-1.0	-0.6	-10.3	-0.8	2.4
07 Pct Discount Rate .....	0.0	0.0	-100.0	-41.7	-100.0	-119.5
07 Pct DR, 0 Month Payback .....	14.0	14.5	-37.9	-30.7	-30.7	-30.7
Allow Gas To Diesel .....	15.5	5.3	-100.0	16.8	-100.0	-139.1
Allow Gas To Diesel, 0 Month Payback ..	32.1	22.6	14.5	46.8	17.0	7.0
flat mix after 2016 .....	1.1	0.9	0.7	2.6	0.8	0.2

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

For some of the cases for which results are presented above, the sensitivity of results to changes in inputs is simple, direct, and easily observed. For example, changes to valuation of avoided GHG emissions impact only this portion of the estimated economic benefits; manufacturers' responses and corresponding costs are not impacted. Similarly, a higher discount rate does not affect physical quantities saved (gallons of fuel and metric tons of CO<sub>2</sub> in the table), but reduces the value of the costs and benefits attributable to the proposed standards in an intuitive way. Some other cases warrant closer consideration:

First, cases involving alternatives to the reference six-month payback period involve different degrees of fuel consumption improvement, and these differences are greatest in the no-action alternative defining the baseline. Because all estimated impacts of the proposed standards are shown as

incremental values relative to this baseline, longer payback periods correspond to smaller estimates of incremental impacts, as fuel economy increasingly improves in the absence of the rule and manufacturers are compelled to add less technology in order to comply with the standards.

Second, cases involving different fuel prices similarly involve different degrees of fuel economy improvement in the absence of the standard, as more, or less, improvement occurs as a result of more, or fewer, technologies appearing cost effective to owner/operators. Lower fuel prices correspond to increases in fuel savings on a volumetric basis, as the standard is responsible for a greater amount of the fuel economy improvement, but the value of fuel savings decreases because each gallon saved is worth less when fuel prices are low. Higher fuel prices correspond to reductions in the volumetric fuel savings attributable to the proposed standards, but lead to

increases in the value of fuel saved because each gallon saved is worth more when fuel prices are high.

Third, because the payback period and fuel price inputs work in opposing directions, the relative magnitude of each is important to consider for the combined sensitivity cases. While the low price and 0-month payback case leads to significant volumetric savings compared to the main analysis, the low fuel price is still sufficient to produce a negative change in net benefits. Similarly, the high price and 24-month payback case results in large reductions to volumetric savings that can be attributed to the proposed standards, but the presence of high fuel prices is not sufficient to lead to increases in either the dollar value of fuel savings or net social benefits.

Fourth, the cases involving different inputs defining the availability of some technologies do not impact equally the estimated impacts across all manufacturers. Section C.8 above

provides a discussion of a sensitivity analysis that excludes strong hybrids and includes the use of downsized turbocharged engines in vans currently equipped with large V-8 engines. The modeling results for this analysis are provided in Section C.8 and in the table above. The no strong hybrid analysis shows that GM could comply with the proposed preferred Alternative 3 without strong hybrids based on the use of turbo downsizing on all of their HD gasoline vans. Alternatively, when the analysis is modified to allow for wider application of diesel engines, strong HEV application for GM drops slightly (from 19 percent to 17 percent) in MY2030, average per-vehicle costs drop slightly (by about \$50), but MY2030 additional penetration rates of diesel engines increase by about 10 percent. Manufacturer-specific model results accompanying today's rules show the

extent to which individual manufacturers' potential responses to the standards vary with these alternative assumptions regarding the availability and applicability of fuel-saving technologies. However, across all of these sensitivity cases, the model projects that social costs increase (as a result of increases in technology costs) when manufacturers choose to comply with the proposed regulations without the use of strong hybrids.

Fifth, the cases that vary the effectiveness and direct cost of available technologies produce nuanced results in the context of even the 0-month payback case. In the case of effectiveness changes, both sensitivity cases result in reductions to the volumetric fuel savings attributable to the proposal; lower effectiveness because the technologies applied in response to the standards save less fuel, and higher effectiveness because more of the

increase in fuel economy occurs in the baseline. However, for both cases, social costs (a strong proxy for technology costs) move in the intuitive direction.

The cases that vary direct costs show volumetric fuel savings increasing under lower direct technology costs despite additional fuel economy improvements in the baseline, as more aggressive technology becomes cost effective. Higher direct costs lead to decreases in volumetric fuel savings, as more of the fuel economy improvement can be attributed to the rule. In both cases, social costs (as a result of technology costs) move in the intuitive direction.

If, instead of using the values in the main analysis, each sensitivity case were itself the main analysis, the costs and benefits attributable to the proposed rule would be as they appear in Table VI-32, below.

TABLE VI-32—COSTS AND BENEFITS OF PROPOSED STANDARDS FOR HD PICKUPS AND VANS UNDER ALTERNATIVE ASSUMPTIONS

Sensitivity case	Fuel savings (billion gallons)	CO2 reduction (MMT)	Fuel savings (\$billion)	Social costs (\$billion)	Social benefits (\$billion)	Net social benefits (\$billion)
6 Month Payback (main) .....	7.8	94.1	15.9	5.5	23.5	18.0
0 Month Payback .....	8.9	107.7	18.3	5.8	27.0	21.3
12 Month Payback .....	7.4	87.2	15.2	5.6	21.9	16.3
18 Month Payback .....	5.5	65.8	11.7	4.9	16.8	11.9
24 Month Payback .....	4.5	52.7	9.2	4.4	13.3	8.9
AEO-Low .....	8.1	94.7	11.5	5.1	17.8	12.7
AEO-High .....	7.3	84.9	19.6	5.8	27.4	21.6
AEO-Low, 0 Month Payback .....	9.3	109.1	13.3	5.6	20.6	15.1
AEO-High, 24 Month Payback .....	2.8	32.4	7.2	2.9	10.2	7.3
50pct Owner/operator Benefit .....	7.8	91.5	8.0	5.8	15.0	9.2
75pct Owner/operator Benefit .....	7.8	91.5	11.9	5.8	19.0	13.2
Low SCC .....	7.8	91.5	15.9	5.8	20.5	14.8
Low SCC, 0 Month Payback .....	8.9	104.7	18.3	6.1	23.6	17.5
High SCC .....	7.8	91.5	15.9	5.8	24.7	19.0
High SCC, 0 Month Payback .....	8.9	104.7	18.3	6.1	28.5	22.4
Very High SCC .....	7.8	91.5	15.9	5.8	29.5	23.8
Very High SCC, 0 Month Payback .....	8.9	104.7	18.3	6.1	34.0	27.9
05 Pct Rebound Effect .....	8.2	95.7	16.6	5.0	23.0	18.0
15 Pct Rebound Effect .....	7.5	87.2	15.2	6.5	22.9	16.4
20 Pct Rebound Effect .....	7.1	83.0	14.4	7.2	22.8	15.5
RPE-Based Markup .....	7.6	90.1	16.0	7.6	22.9	15.4
Mass Fatality Coeff 05pct .....	7.8	91.5	15.9	4.4	23.0	18.5
Mass Fatality Coeff 95pct .....	7.8	91.5	15.9	7.1	23.0	15.8
NoSHEVs .....	7.2	84.3	14.6	8.0	21.1	13.1
NoSHEVs, 0 Month Payback .....	7.0	82.0	14.3	4.4	20.6	16.2
Lower Effectiveness .....	7.9	94.0	16.7	6.8	23.9	17.1
Higher Effectiveness .....	7.5	88.0	15.3	10.1	22.1	12.0
Lower Direct Costs .....	7.7	90.5	15.8	5.2	22.8	17.6
Higher Direct Costs .....	7.8	91.5	8.5	3.8	13.8	10.0
Wider Diesel Downsizing .....	8.9	104.7	9.9	4.0	15.9	11.9
07 Pct Discount Rate .....	9.0	96.3	15.3	7.2	22.7	15.5
07 Pct DR, 0 Month Payback .....	10.3	112.2	18.2	8.5	26.9	18.4
Allow Gas To Diesel .....	7.9	92.3	16.0	5.9	23.1	17.2
Allow Gas To Diesel, 0 Month Payback ..	7.3	85.8	15.1	6.9	21.7	14.8
Flat mix after 2016 .....	8.4	99.8	17.6	7.4	25.4	17.9

#### (7) Uncertainty Analysis

As in previous rules, NHTSA has conducted an uncertainty analysis to

determine the extent to which uncertainty about input assumptions could impact the costs and benefits


attributable to the proposed rule. Unlike the preceding sensitivity analysis, which is useful for understanding how

alternative values of a single input assumption may influence the estimated impacts of the proposed standards, the uncertainty analysis considers multiple states of the world, characterized by a distribution of specific values of all relevant inputs, based on their relative probability of occurrence. A sensitivity analysis varies a single parameter of interest, holding all others constant at whatever nominal values are used to generate the single point estimate in the main analysis, and measures the resulting deviation. However, the uncertainty analysis allows all of those parameters to vary simultaneously—

relaxing the assumption that “all else is equal”.

Each trial, of which there are 14,000 in this analysis, represents a different state of the world in which the standards are implemented. To gauge the robustness of the estimates of impacts in the proposal, NHTSA varied technology costs and effectiveness, fuel prices, market demand for fuel economy improvements in the absence of the rule, the amount of additional driving associated with fuel economy improvements (the rebound effect), and the on-road gaps between realized fuel economy and laboratory test values for

gasoline and diesel vehicles. The shapes and types of the probability distributions used in the analysis vary by uncertainty parameter, though the costs and effectiveness values for technologies are sampled as groups to minimize issues associated with interdependence. The most important input to the uncertainty analysis, fuel prices (which drive the majority of benefits from the proposed standards), are drawn from a range of fuel prices characterized by permutations of the Low, Reference, and High fuel price cases in the Annual Energy Outlook 2014.

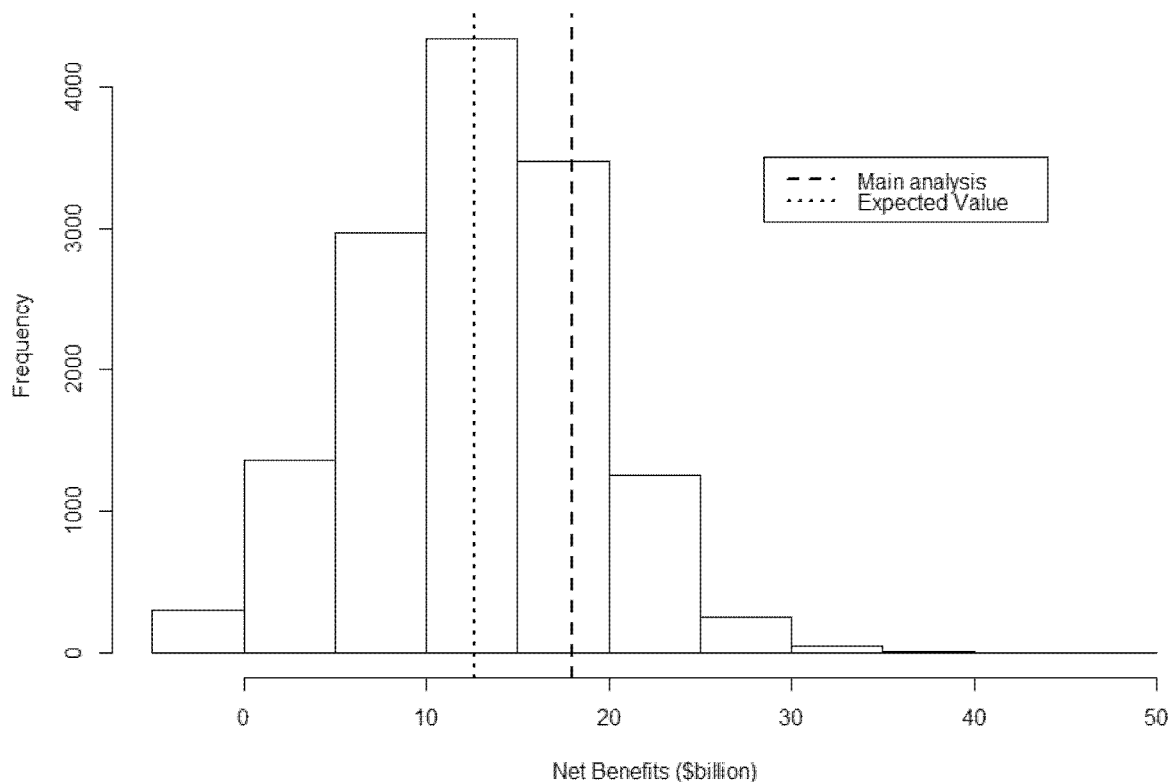


**Figure VI-7 Distribution of Net Benefits from Proposed Standards for HD Pickups and Vans**

Figure VI-7 displays the distribution of net benefits estimated by the ensemble of simulation runs. As Figure VI-7 indicates, the analysis produces a wide distribution of possible outcomes that are much broader than the range of estimates characterized by only the difference between the more and less dynamic baselines. While the expected value, the probability-weighted average outcome, is only about 70 percent of the net benefits estimated in the main analysis, almost all of the trials produce

positive net benefits. In fact, the distribution suggests there is only a one percent chance of the proposal producing negative net benefits for HD pickups and vans. So while the estimated net benefits in the main analysis may be higher than the expected value when uncertainty is considered, net benefits at least as high as those estimated in the main analysis are still 20 times as likely as an outcome that results in net costs.

Figure VI-8 shows the distribution of payback periods (in years) for Model

Year 2029 trucks across 14,000 simulation runs. The “payback period” typically refers to the number of years of vehicle use that occur before the savings on fuel expenditures offset the additional technology cost associated with improved fuel economy. As Figure VI-8 illustrates, the expected incremental technology cost of both Phase 1 and Phase 2 is eclipsed by the value of fuel savings by year three of ownership in most cases

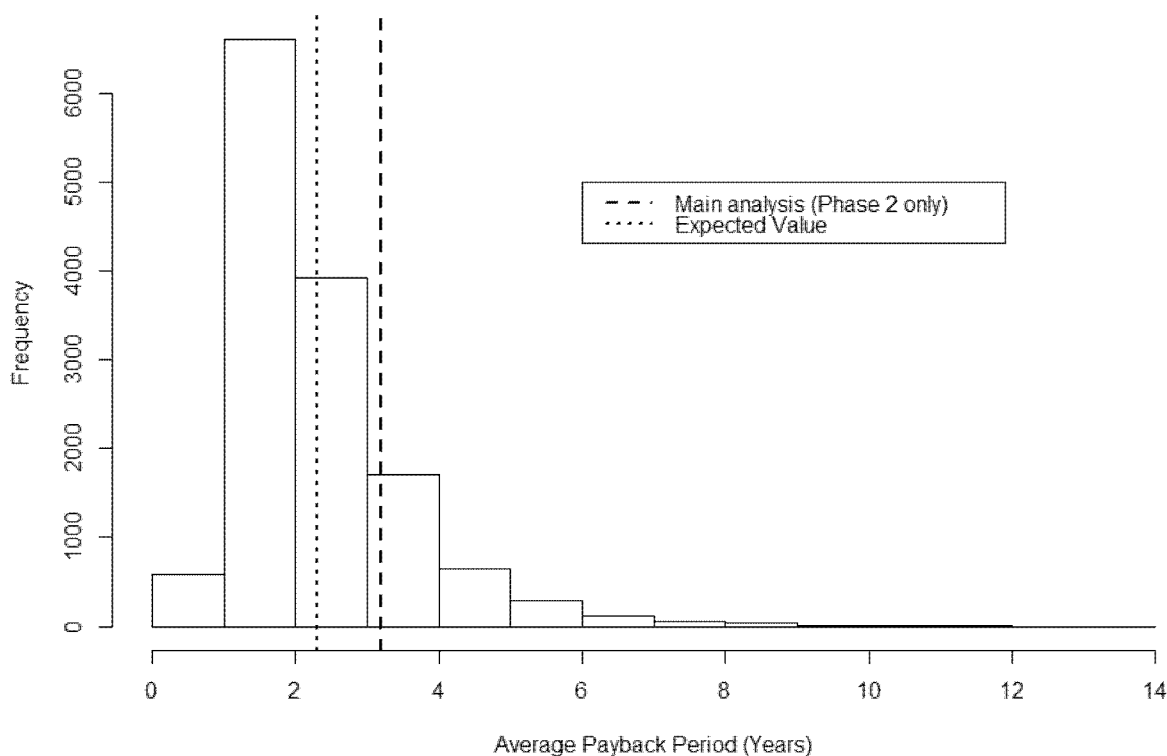

**Figure VI-8 Average Payback Period for MY 2029 HP Pickup or Van Based on Expected Phase 1 and Phase**

## **2 (combined) Technology Costs**

This is an important metric for owner/operator acceptability and, though Figure VI-8 illustrates the long right tail of the payback distribution (where payback periods are likely to be unacceptably long), fewer than ten percent of the trials result in payback periods longer than four years. This suggests that, even in the face of uncertainty about future fuel prices and fuel economy in real-world driving conditions, buyers of the vehicles that are modified to comply with the requirements of the proposal will still see fuel savings greater than their additional vehicle cost in a relatively short period of time. As one would expect, the technologies used in Phase 1 of the MDHD program are likely to be more cost effective and serve to lower the expected payback period, even compared to the main analysis of Phase 2.

### *E. Compliance and Flexibility for HD Pickup and Van Standards*

#### **(1) Averaging, Banking, and Trading**

The Phase 1 program established substantial flexibility in how manufacturers can choose to implement EPA and NHTSA standards while preserving the benefits for the

environment and for energy consumption and security. Primary among these flexibilities are the gradual phase-in schedule, and the corporate fleet average approach which encompasses averaging, banking and trading described below. See Section IV.A. of the Phase 1 preamble (76 FR 57238) for additional discussion of the Phase 1 averaging, banking, and trading and Section IV.A (3) of the Phase 1 preamble (76 FR 57243) for a discussion of the credit calculation methodology.

Manufacturers in this category typically offer gasoline and diesel versions of HD pickup and van vehicle models. The agencies established chassis-based Phase 1 standards that are equivalent in terms of stringency for gasoline and diesel vehicles and are proposing the same approach to stringency for Phase 2. In Phase 1, the agencies established that HD pickups and vans are treated as one large averaging set that includes both gasoline and diesel vehicles<sup>369</sup> and the agencies

are proposing to maintain this averaging set approach for Phase 2.

As explained in Section II.C(3) of the Phase 1 preamble (76 FR 57167), and in Section VI.B (3) above, the program is structured so that final compliance is determined at the end of each model year, when production for the model year is complete. At that point, each manufacturer calculates production-weighted fleet average CO<sub>2</sub> emission and fuel consumption rates along with its production-weighted fleet average standard. Under this approach, a manufacturer's HD pickup and van fleet that achieves a fleet average CO<sub>2</sub> or fuel consumption level better than its standard would be allowed to generate credits. Conversely, if the fleet average CO<sub>2</sub> or fuel consumption level does not meet its standard, the fleet would incur debits (also referred to as a shortfall).

A manufacturer whose fleet generates credits in a given model year will have several options for using those credits to offset emissions from other HD pickups and vans. These options include credit carry-back, credit carry-forward, and credit trading within the HD pickup and van averaging set. These types of credit provisions also exist in the light-duty 2012–2016 and 2017–2025 MY vehicle

<sup>369</sup> See 40 CFR 1037.104(d) and the proposed 40 CFR 86.1819–14(d). Credits may not be transferred or traded between this vehicle averaging set and loose engines or other heavy-duty categories, as discussed in Section I.

rules, as well as many other mobile source standards issued by EPA under the CAA. The manufacturer will be able to carry back credits to offset a deficit that had accrued in a prior model year and was subsequently carried over to the current model year, with a limitation on the carry-back of credits to three model years. After satisfying any need to offset pre-existing deficits, a manufacturer may bank remaining credits for use in future years, with a limitation on the carry-forward of credits to five model years. Averaging vehicle credits with engine credits or between vehicle weight classes is not allowed, as discussed in Section I. The agencies are not proposing changes to any of these provisions for the Phase 2 program.

While the agencies are proposing to retain 5 year carry-forward of credits for all HD sectors, the agencies request comment on the merits of a temporary credit carry-forward period of longer than 5 years for HD pickups and vans, allowing Phase 1 credits generated in MYs 2014–2019 to be used through MY 2027. EPA included a similar provision in the MY 2017–2025 light-duty vehicle rule, which allows a one-time credit carry-forward of MY 2010–2015 credits to be carried forward through MY 2021.<sup>370</sup> Such a credit carry-forward extension for HD pickups and vans may

provide manufacturers with additional flexibility during the transition to the proposed Phase 2 standards. A temporary credit carry-forward period of longer than five years for Phase 1 credits may help manufacturers resolve lead-time issues they might face as the proposed more stringent Phase 2 standards phase-in and help avoid negative impacts to their product redesign cycles which tend to be longer than those for light-duty vehicles.

As discussed in Section VI.B.4., EPA and NHTSA are proposing to change the HD pickup and van useful life for GHG emissions and fuel consumption from the current 11 years/120,000 miles to 15 years/150,000 miles to make the useful life for GHG emissions consistent with the useful life of criteria pollutants recently updated in the Tier 3 rule. As shown in the Equation VI–1 credits calculation formula below, established by the Phase 1 rule, useful life in miles is a multiplicative factor included in the calculation of CO<sub>2</sub> and fuel consumption credits. In order to ensure banked credits maintain their value in the transition from Phase 1 to Phase 2, NHTSA and EPA propose an adjustment factor of 1.25 (i.e., 150,000÷120,000) for credits that are carried forward from Phase 1 to the MY 2021 and later Phase 2 standards. Without this adjustment factor the proposed change in useful life

would effectively result in a discount of banked credits that are carried forward from Phase 1 to Phase 2, which is not the intent of the change in the useful life. Consider, for example, a vehicle configuration with annual sales of 1,000 vehicles that was 10 g/mile below the standard. Under Phase 1, those vehicles would generate 1,200 Mg of credit (10×1,000×120,000÷1,000,000). Under Phase 2, the same vehicles would generate 1,500 Mg of credit (10×1,000×150,000÷1,000,000). The agencies do not believe that this proposed adjustment results in a loss of program benefits because there is little or no deterioration anticipated for CO<sub>2</sub> emissions and fuel consumption over the life of the vehicles. Also, as described in the standards and feasibility sections above, the carry-forward of credits is an integral part of the program, helping to smoothing the transition to the new Phase 2 standards. The agencies believe that effectively discounting carry-forward credits from Phase 1 to Phase 2 would be unnecessary and could negatively impact the feasibility of the proposed Phase 2 standards. EPA and NHTSA request comment on all aspects of the averaging, banking, and trading program.

#### Equation VI-1 Total Model Year Credit (Debit) Calculation

$$\text{CO}_2 \text{ Credits (Mg)} = [(\text{CO}_2 \text{ Std} - \text{CO}_2 \text{ Act}) \times \text{Volume} \times \text{UL}] \div 1,000,000$$

$$\text{Fuel Consumption Credits (gallons)} = (\text{FC Std} - \text{FC Act}) \times \text{Volume} \times \text{UL} \times 100$$

Where:

CO<sub>2</sub> Std = Fleet average CO<sub>2</sub> standard (g/mi)

FC Std = Fleet average fuel consumption standard (gal/100 mile)

CO<sub>2</sub> Act = Fleet average actual CO<sub>2</sub> value (g/mi)

FC Act = Fleet average actual fuel consumption value (gal/100 mile)

Volume = the total production of vehicles in the regulatory category

UL = the useful life for the regulatory category (miles)

#### (2) Advanced Technology Credits

The Phase 1 program included on an interim basis advanced technology credits for MYs 2014 and later in the form of a multiplier of 1.5 for the following technologies:

- Hybrid powertrain designs that include energy storage systems

- Waste heat recovery
- All-electric vehicles
- Fuel cell vehicles

The advanced technology credit program is intended to encourage early development of technologies that are not yet commercially available. This multiplier approach means that each advanced technology vehicle would count as 1.5 vehicles in a manufacturer's compliance calculation. A manufacturer also has the option to subtract these vehicles out of its fleet and determine their performance as a separate fleet calculating advanced technology credits that can be used for all other HD vehicle categories, but these credits would, of course, not then be reflected in the manufacturer's conventional pickup and van category

credit balance. The credits are thus 'special' in that they can be applied across the entire heavy-duty sector, unlike the ABT and early credits discussed above and the proposed off-cycle technology credits discussed in the following subsection. The agencies also capped the amount of advanced credits that can be transferred into any averaging set into any model year at 60,000 Mg to prevent market distortions.

The advanced technology multipliers were included on an interim basis in the Phase 1 program and the agencies are proposing to end the incentive multipliers beginning in MY 2021, when the more stringent Phase 2 standards are proposed to begin phase-in. The agencies are proposing a similar approach for the other HD sectors as

<sup>370</sup> 77 FR 62788, October 15, 2012.

discussed in Section I.C. (1). The advanced technology incentives are intended to promote the commercialization of technologies that have the potential to provide substantially better GHG emissions and fuel consumption if they were able to overcome major near-term market barriers. However, the incentives are not intended to be a permanent part of the program as they result in a decrease in overall GHG emissions and fuel consumption benefits associated with the program when used. More importantly, as explained in Section I. above, the agencies are already predicating the stringency of the proposed standards on development and deployment of two of these Phase 1 advanced technologies (waste heat recovery and strong hybrid technology), so that it would be inappropriate (and essentially a windfall) to include credits for use of these technologies in Phase 2.<sup>371</sup>

As discussed in Section I, the agencies request comment on the proposed approach for the advanced technology multipliers for HD pickups and vans as well as the other HD sectors, including comments on whether or not the credits should be extended to later model years for more advanced technologies such as EVs and fuel cell vehicles. These technologies are not projected to be part of the technology path used by manufacturer to meet the proposed Phase 2 standards for HD pickups and vans. Waste heat recovery is also not projected to be used for HD pickups and vans in the time frame of the proposed rules. EV and fuel cell technologies would presumably need to overcome the highest hurdles to commercialization for HD pickups and vans in the time frame of the proposed rules, and also have the potential to provide the highest level of benefit. We welcome comments on the need for such incentives, including information on why an incentive for specific technologies in this time frame may be warranted, recognizing that the incentive would result in reduced

benefits in terms of CO<sub>2</sub> emissions and fuel use due to the Phase 2 program.

NHTSA and EPA established that for Phase 1, EVs and other zero tailpipe emission vehicles be factored into the fleet average GHG and fuel consumption calculations based on the diesel standards targets for their model year and work factor. The agencies also established for electric and zero emission vehicles that in the credits equation the actual emissions and fuel consumption performance be set to zero (*i.e.* that emissions be considered on a tailpipe basis exclusively) rather than including upstream emissions or energy consumption associated with electricity generation. As we look to the future, we are not projecting the adoption of electric HD pickups and vans into the market; therefore, we believe that this provision is still appropriate. Unlike the MY2012–2016 light-duty rule, which adopted a cap whereby upstream emissions would be counted after a certain volume of sales (see 75 FR 25434–25436), we believe there is no need to propose a cap for HD pickups and vans because of the infrequent projected use of EV technologies in the Phase 2 timeframe. In Phase 2, we propose to continue to deem electric vehicles as having zero CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O emissions as well as zero fuel consumption. We welcome comments on this approach. See also Section I for a discussion of the treatment of lifecycle emissions for alternative fuel vehicles and Section XI for the treatment of lifecycle emissions for natural gas specifically.

### (3) Off-Cycle Technology Credits

The Phase 1 program established an opportunity for manufacturers to generate credits by applying innovative technologies whose CO<sub>2</sub> and fuel consumption benefits are not captured on the 2-cycle test procedure (*i.e.*, off-cycle).<sup>372</sup> As discussed in Sections III.F. and V.E.3., the agencies are proposing approaches for Phase 2 off-cycle technology credits for tractors and vocational vehicles with proposed provisions tailored for those sectors. For HD pickups and vans, the approach for off-cycle technologies established in Phase 1 is similar to that established for light-duty vehicles due to the use of the same basic chassis test procedures. The agencies are proposing to retain this approach for Phase 2. To generate

credits, manufacturers are required to submit data and a methodology for determining the level of credits for the off-cycle technology subject to EPA and NHTSA review and approval. The application for off-cycle technology credits is also subject to a public evaluation process and comment period. EPA and NHTSA would approve the methodology and credits only if certain criteria were met. Baseline emissions and fuel consumption<sup>373</sup> and control emissions and fuel consumption need to be clearly demonstrated over a wide range of real world driving conditions and over a sufficient number of vehicles to address issues of uncertainty with the data. Data must be on a vehicle model-specific basis unless a manufacturer demonstrated model-specific data were not necessary. Once a complete application is submitted by the manufacturer, the regulations require that the agencies publish a notice of availability in the **Federal Register** notifying the public of a manufacturer's proposed off-cycle credit calculation methodology and provide opportunity for comment.

As noted above, the approach finalized for HD pickups and vans paralleled provisions for off-cycle credits in the MY 2012–2016 light-duty vehicle GHG program.<sup>374</sup> In the MY 2017–2025 light-duty vehicle program, EPA revised the off-cycle credits program for light-duty vehicles to streamline the credits process. In addition to the process established in the MY 2012–2016 rule, EPA added a list or “menu” of pre-approved off-cycle technologies and associated credit levels.<sup>375</sup> Manufacturers may use the pre-defined off-cycle technology menu to generate light-duty vehicle credits by demonstrating at time of certification that the vehicles are equipped with the technology without providing additional test data. Different levels of credits are provided for cars and light trucks in the light-duty program. NHTSA also included these credits in the CAFE program (in gallons/mile equivalent) starting with MY 2017. The list of pre-approved off-cycle technologies for light-duty vehicles is shown below.

<sup>371</sup> EPA and NHTSA similarly included temporary advanced technology multipliers in the light-duty 2017–2025 program, believing it was worthwhile to forego modest additional emissions reductions and fuel consumption improvements in the near-term in order to lay the foundation for the potential for much larger “game-changing” GHG and oil consumption reductions in the longer term. The incentives in the light-duty vehicle program are available through the 2021 model year. See 77 FR 62811, October 15, 2012.

<sup>372</sup> See 76 FR 57251, September 15, 2011, 40 CFR 1037.104(d)(13), and the proposed 40 CFR 86.1819–14(d)(13).

<sup>373</sup> Fuel consumption is derived from measured CO<sub>2</sub> emissions using conversion factors of 8,887 g CO<sub>2</sub>/gallon for gasoline and 10,180 g CO<sub>2</sub>/gallon for diesel fuel.

<sup>374</sup> See 75 FR 25440, May 7, 2010 and 40 CFR 86.1869–12(d).

<sup>375</sup> 77 FR 62832–62839, October 15, 2012.

TABLE VI-33—PRE-APPROVED OFF-CYCLE TECHNOLOGIES FOR LIGHT-DUTY VEHICLES

Pre-approved technologies
High Efficiency Exterior Lighting (at 100W) Waste Heat Recovery (at 100W; scalable) Solar Roof Panels (for 75 W, battery charging only) Solar Roof Panels (for 75 W, active cabin ventilation plus battery charging) Active Aerodynamic Improvements (scalable) Engine Idle Start-Stop w/heater circulation system Engine Idle Start-Stop without/heater circulation system Active Transmission Warm-Up Active Engine Warm-Up Solar/Thermal Control

The agencies initially note that where vehicles are not chassis-certified, but rather evaluate compliance using the GEM simulation tool, with the proposed modifications to GEM, many more technologies (especially those related to engine and transmission improvements) will now be 'on-cycle'—evaluated directly by the GEM compliance tool. However, with respect to the proposed standards which would be chassis-certified—namely, the standards for heavy duty pickups and vans, the effectiveness of some technologies will be only partially captured (or not captured at all). EPA and NHTSA are requesting comment on establishing a pre-defined technology menu list for HD pickups and vans. The list for HD pickups and vans could include some or all of the technologies listed in Table VI-33. As with the light-duty program, the pre-defined list may simplify the process for generating off-cycle credits and may further encourage the introduction of these technologies. However, the appropriate default level of credits for the heavier vehicles would need to be established. The agencies request comments with supporting HD pickup and van specific data and analysis that would provide a substantive basis for appropriate adjustments to the credits levels for the HD pickup and van category. The data and analysis would need to demonstrate that the pre-defined credit level represents real-world emissions reductions and fuel consumption improvements not captured by the 2-cycle test procedures.

As with the light-duty vehicle program, the agencies would also consider including a cap on credits generated from a pre-defined list established for HD pickups and vans. The cap for the light-duty vehicle program is 10 g/mile (and gallons/mi equivalent) applied on a manufacturer fleet-wide basis.<sup>376</sup> The 10 g/mile cap limits the total off-cycle credits allowed

based on the pre-defined list across the manufacturer's light-duty vehicle fleet. The agencies adopted the cap on credits to address issues of uncertainty regarding the level of credits automatically assigned to each technology. Manufacturers able to demonstrate that a technology provides improvements beyond the menu credit level would be able to apply for additional credits through the individual demonstration process noted above. Credits based on the individual manufacturer demonstration would not count against the credit cap. If a menu list of credits is developed to be included in the HD pickup and van program, a cap may also be appropriate depending on the technology list and credit levels. The agencies request comments on all aspects of the off-cycle credits program for HD trucks and vans.

#### (4) Demonstrating Compliance for Heavy-Duty Pickup Trucks and Vans

The Phase 1 rule established a comprehensive compliance program for HD pickups and vans that NHTSA and EPA are generally retaining for Phase 2. The compliance provisions cover details regarding the implementation of the fleet average standards including vehicle certification, demonstrating compliance at the end of the model year, in-use standards and testing, carryover of certification test data, and reporting requirements. Please see Section V.B (1) of the Phase 1 rule preamble (76 FR 57256–57263) for a detailed discussion of these provisions.

The Phase 1 rule contains special provisions regarding loose engines and optional chassis certification of certain vocational vehicles over 14,000 lbs. GVWR. The agencies are proposing to extend the optional chassis certification provisions to Phase 2 and are not proposing to extend the loose engine provisions. See the vocational vehicle Section V.E. and XIV.A.2 for a detailed discussion of the proposal for optional chassis certification and II.D. for the discussion of loose engines.

## VII. Aggregate GHG, Fuel Consumption, and Climate Impacts

Given that the purpose of setting these Phase 2 standards is to reduce fuel consumption and greenhouse gas (GHG) emissions from heavy-duty vehicles, it is necessary for the agencies to analyze the extent to which the proposed standards would accomplish that purpose. This section describes the agencies' methodologies for projecting the reductions in greenhouse gas (GHG) emissions and fuel consumption, and the methodologies the agencies used to quantify the impacts associated with the proposed standards, as well as the impacts of Alternative 4. In addition, EPA's analyses of the projected change in atmospheric carbon dioxide (CO<sub>2</sub>) concentration and consequent climate change impacts are discussed. Because of NHTSA's obligations under EPCA/EISA and NEPA, NHTSA further analyzes, for each regulatory alternative, the projected environmental impacts related to fuel consumption, GHG emissions, and climate change. Detailed documentation of this analysis is provided in Chapters 3 and 5 of NHTSA's DEIS accompanying today's notice.

### A. What methodologies did the agencies use to project GHG emissions and fuel consumption impacts?

Different tools exist for estimating potential fuel consumption and GHG emissions impacts associated with fuel efficiency and GHG emission standards. One such tool is EPA's official mobile source emissions inventory model named Motor Vehicle Emissions Simulator (MOVES).<sup>377</sup> The agencies used the most current version of the model, MOVES2014, to quantify the impacts of the proposed standards for vocational vehicles and combination tractor-trailers on GHG emissions and fuel consumption for each regulatory alternative. MOVES was run with user

<sup>376</sup> See 40 CFR 86.1869–12(b).

<sup>377</sup> MOVES homepage: <http://www.epa.gov/otaq/models/moves/index.htm> (last accessed Feb 23, 2015).

input databases, described in more detail below, that reflected the projected technological improvements resulting from the proposed rules, such as the improvements in engine and vehicle efficiency, aerodynamic drag, and tire rolling resistance.

Another such tool is DOT's CAFE model, which estimates how manufacturers could potentially apply technology improvements in response to new standards, and then calculates, among other things, resultant changes in national fuel consumption and GHG emissions. For today's analysis of potential new standards for HD pickups and vans, the model was reconfigured to use the work-based attribute metric of "work factor" established in the Phase 1 rule for heavy-duty pickups and vans instead of the light-duty "footprint" attribute metric. The CAFE model takes user-specified inputs on, among other things, vehicles that will be produced in a given model year, technologies available to improve fuel efficiency on those vehicles, potential regulatory standards that would drive improvements in fuel efficiency, and economic assumptions. The CAFE model takes every vehicle in each manufacturer's fleet and decides what technologies to add to those vehicles in order to allow each manufacturer to comply with the standards in the most cost-effective way. Based on the resulting improved vehicle fleet, the CAFE model then calculates total fuel consumption and GHG emissions impacts based on those inputs, along with economic costs and benefits. The DOT's CAFE model is further described in detail in Section VI.C of the preamble and Chapter 2 of the draft RIA.

For these rules, the agencies conducted coordinated and complementary analyses by using two analytical methods for the heavy-duty pickup and van segment employing both DOT's CAFE model and EPA's MOVES model. The agencies used EPA's MOVES model to estimate fuel consumption and emissions impacts for tractor-trailers (including the engine that powers the tractor), and vocational vehicles (including the engine that powers the vehicle).

For heavy-duty pickups and vans, the agencies performed complementary analyses, which we refer to as "Method A" and "Method B". In Method A, the CAFE model was used to project a pathway the industry could use to comply with each regulatory alternative and the estimated effects on fuel consumption, emissions, benefits and costs. In Method B, the MOVES model was used to estimate fuel consumption and emissions from these vehicles.

NHTSA considered Method A as its central analysis. EPA considered the results of both methods. The agencies concluded that both methods led the agencies to the same conclusions and the same selection of the proposed standards. See Chapter 5 of the draft RIA for additional discussions of these two methods.

For both methods, the agencies analyzed the impact of the proposed rules and Alternative 4, relative to two different reference cases—less dynamic and more dynamic. The less dynamic baseline projects very little improvement in new vehicles in the absence of new Phase 2 standards. In contrast, the more dynamic baseline projects more improvements in vehicle fuel efficiency. The agencies considered both reference cases (for additional details, see Chapter 11 of the draft RIA). The results for all of the regulatory alternatives relative to both reference cases, derived via the same methodologies discussed in this section, are presented in Section X of the preamble.

For brevity, a subset of these analyses are presented in this section, and the reader is referred to both the RIA Chapter 11 and NHTSA's DEIS Chapters 3 and 5 for complete sets of these analyses. In this section, Method A is presented for both the proposed standards (*i.e.*, Alternative 3—the agencies' preferred alternative) and for the standards the agencies considered in Alternative 4, relative to both the more dynamic baseline (Alternative 1b) and the less dynamic baseline (Alternative 1a). Method B is presented also for the proposed standards and Alternative 4, but relative only to the less dynamic baseline. The agencies' intention for presenting both of these complementary and coordinated analyses is to offer interested readers the opportunity to compare the regulatory alternatives considered for Phase 2 in both the context of our HD Phase 1 analytical approaches and our light-duty vehicle analytical approaches. The agencies view these analyses as corroborative and reinforcing: Both support agencies' conclusion that the proposed standards are appropriate and at the maximum feasible levels.

Because reducing fuel consumption also affects emissions that occur as a result of fuel production and distribution (including renewable fuels), the agencies also calculated those "upstream" changes using the "downstream" fuel consumption reductions predicted by the CAFE model and the MOVES model. As described in Section VI, Method A uses the CAFE model to estimate vehicular

fuel consumption and emissions impacts for HD pickups and vans and to calculate upstream impacts. For vocational vehicles and combination tractor-trailers, both Method A and Method B use the same upstream tools originally created for the Renewable Fuel Standard 2 (RFS2) rulemaking analysis,<sup>378</sup> used in the LD GHG rulemakings,<sup>379</sup> HD GHG Phase 1,<sup>380</sup> and updated for the current analysis. The estimate of emissions associated with production and distribution of gasoline and diesel from crude oil is based on emission factors in the "Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation" model (GREET) developed by DOE's Argonne National Lab. In some cases, the GREET values were modified or updated by the agencies to be consistent with the National Emission Inventory (NEI) and emission factors from MOVES. Method B uses the same tool described above to estimate the upstream impacts for HD pickups and vans. For additional details, see Chapter 5 of the draft RIA. The upstream tool used for the Method B can be found in the docket.<sup>381</sup> As noted in Section VI above, these analyses corroborate each other's results.

The agencies analyzed the anticipated emissions impacts of the proposed rules and Alternative 4 on carbon dioxide (CO<sub>2</sub>), methane (CH<sub>4</sub>), nitrous oxide (N<sub>2</sub>O), and hydrofluorocarbons (HFCs) for a number of calendar years (for purposes of the discussion in these proposed rules, only 2025, 2035 and 2050 will be shown) by comparing to both reference cases.<sup>382</sup> Additional runs were performed for just the three of the greenhouse gases (CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O) and for fuel consumption for every calendar year from 2014 to 2050, inclusive, which fed the economy-wide modeling, monetized greenhouse gas benefits estimation, and climate impacts

<sup>378</sup> U.S. EPA. Draft Regulatory Impact Analysis: Changes to Renewable Fuel Standard Program. Chapters 2 and 3. May 26, 2009. Docket ID: EPA-HQ-OAR-2009-0472-0119

<sup>379</sup> 2017 and Later Model Year Light-Duty Vehicle Greenhouse Gas Emissions and Corporate Average Fuel Economy Standards (77 FR 62623, October 15, 2012).

<sup>380</sup> Greenhouse Gas Emission Standards and Fuel Efficiency Standards for Medium- and Heavy-Duty Engines and Vehicles (76 FR 57106, September 15, 2011).

<sup>381</sup> Memorandum to the Docket "Upstream Emissions Modeling Files for HDGHG Phase 2 NPRM" Docket No. EPA-HQ-OAR-2014-0827.

<sup>382</sup> The emissions impacts of the proposed rules on non-GHGs, including air toxics, were also estimated using MOVES. See Section VIII of the preamble for more information.



analyses, discussed in sections below.<sup>383</sup>

*B. Analysis of Fuel Consumption and GHG Emissions Impacts Resulting From Proposed Standards and Alternative 4*

The following sections describe the model inputs and assumptions for both the less dynamic and more dynamic reference cases and the control case representing the agencies' proposed fuel efficiency and GHG standards. The agencies request comment on the model inputs, projected reductions in energy rates and fuel consumption rates presented in this section, as well as in Chapter 5 of the draft RIA. The details of all the MOVES runs, and input data tables, as well as the MOVES code and database, can be found in the docket.<sup>384</sup> See Section VI.C for the discussion of the model inputs and assumptions for the analysis of the HD pickups and vans using DOT's CAFE Model.

(1) Model Inputs and Assumptions for the Less Dynamic Reference Case

The less dynamic reference case (identified as Alternative 1a in Section X), includes the impact of Phase 1, but generally assumes that fuel efficiency and GHG emission standards are not improved beyond the required 2018 model year levels. Alternative 1a functions as one of the baselines against which the impacts of the proposed standards can be evaluated. This case projects some improvements in the efficiency of the box trailers pulled by combination tractors due to increased penetration of aerodynamic technologies and low rolling resistance tires attributed to both EPA's SmartWay Transport Partnership and California Air Resources Board's Tractor-Trailer Greenhouse Gas regulation, as described in Section IV of the preamble. For other

HD vehicle sectors, no market-driven improvement in fuel efficiency was assumed. For HD pickups and vans, the CAFE model was applied in a manner that assumes manufacturers would only add fuel-saving technology as needed to continue complying with Phase 1 standards. MOVES2014 defaults were used for all other parameters to estimate the emissions inventories for this case. The less dynamic reference case assumed the MOVES2014 default vehicle population and miles traveled estimates. The growth in vehicle populations and miles traveled in MOVES2014 is based on the relative annual VMT growth from AEO2014 Early Release for model years 2012 and later.<sup>385</sup>

(2) Model Inputs and Assumptions for the More Dynamic Reference Case

The more dynamic reference case (identified as Alternative 1b in Section X), also includes the impact of Phase 1 and generally assumes that fuel efficiency and GHG emission standards are not improved beyond the required 2018 model year levels. However, for this case, the agencies assume market forces would lead to additional fuel efficiency improvements for HD pickups and vans and tractor-trailers. These additional assumed improvements are described in Section X of the preamble. No additional fuel efficiency improvements due to market forces were assumed for vocational vehicles. For HD pickups and vans, the agencies applied the CAFE model using the input assumption that manufacturers having achieved compliance with Phase 1 standards would continue to apply technologies for which increased purchase costs would be "paid back" through corresponding fuel savings

within the first six months of vehicle operation. The agencies conducted the MOVES analysis of this case in the same manner as for the less dynamic reference case.

(3) Model Inputs and Assumptions for "Control" Case

(a) Vocational Vehicles and Tractor-Trailers

The "control" case represents the agencies' proposed fuel efficiency and GHG standards. The agencies developed additional user input data for MOVES runs to estimate the control case inventories. The inputs to MOVES for the control case account for improvements of engine and vehicle efficiency in vocational vehicles and combination tractor-trailers. The agencies used the percent reduction in aerodynamic drag and tire rolling resistance coefficients and absolute changes in average total running weight (gross combined weight) expected from the proposed rules to develop the road load inputs for the control case, based on the GEM analysis. The agencies also used the percent reduction in CO<sub>2</sub> emissions expected from the powertrain and other vehicle technologies not accounted for in the aerodynamic drag and tire rolling resistance in the proposed rules to develop energy inputs for the control case runs.

Table VII-1 and Table VII-2 describe the proposed improvements in engine and vehicle efficiency from the proposed rules for vocational vehicles and combination tractor-trailers that were input into MOVES for estimating the control case emissions inventories. Additional details regarding the MOVES inputs are included in the Chapter 5 of the draft RIA.

TABLE VII-1—ESTIMATED REDUCTIONS IN ENERGY RATES FOR THE PROPOSED STANDARDS

Vehicle type	Fuel	Model years	Reduction from reference case (percent)
Long-haul Tractor-Trailers and HHD Vocational .....	Diesel .....	2018–2020	1.3
		2021–2023	5.2
		2024–2026	9.7
		2027+	10.4
Short-haul Tractor-Trailers and HHD Vocational .....	Diesel .....	2018–2020	0.9

<sup>383</sup> The CAFE model estimates, among other things, manufacturers' potential multiyear planning decisions within the context of an estimated year-by-year product cadence (*i.e.*, schedule for redesigning and freshening vehicles). The agencies included earlier model years in the analysis in order to account for the potential that manufacturers might take anticipatory actions in model years preceding those covered by today's proposal.

<sup>384</sup> Memorandum to the Docket "Runs specs, Model Inputs, MOVES Code and Database for HD GHG

Phase 2 NPRM Emissions Modeling" Docket No. EPA-HQ-OAR-2014-0827

<sup>385</sup> MOVES2014 assumes the population and VMT growth based on the early release version of AEO2014 because it was the only version that was available at the time of MOVES2014 development. Annual Energy Outlook 2014. <http://www.eia.gov/forecasts/aeo/er/> (last accessed Feb 23, 2015).

<sup>386</sup> Vocational vehicles modeled in MOVES include heavy heavy-duty, medium heavy-duty, and light heavy-duty vehicles. However, for light

heavy-duty vocational vehicles, class 2b and 3 vehicles are not included in the inventories for the vocational sector. Instead, all vocational vehicles with GVWR of less than 14,000 lbs were modeled using the energy rate reductions described below for HD pickup trucks and vans. In practice, many manufacturers of these vehicles choose to average the lightest vocational vehicles into chassis-certified families (*i.e.*, heavy-duty pickups and vans).

TABLE VII-1—ESTIMATED REDUCTIONS IN ENERGY RATES FOR THE PROPOSED STANDARDS—Continued

Vehicle type	Fuel	Model years	Reduction from reference case (percent)
Single-Frame Vocational <sup>386</sup>	Diesel and CNG	2021–2023	5.0
		2024–2026	9.5
		2027+	10.4
		2021–2023	5.3
	Gasoline	2024–2026	8.9
		2027+	13.3
		2021–2023	3.3
		2024–2026	5.4
		2027+	10.3

TABLE VII-2—ESTIMATED REDUCTIONS IN ROAD LOAD FACTORS FOR THE PROPOSED STANDARDS

Vehicle type	Model years	Reduction in tire rolling resistance coefficient (percent)	Reduction in aerodynamic drag coefficient (percent)	Weight reduction (LB) <sup>a</sup>
Combination Long-haul Tractor-Trailers	2018–2020	5.5	5.1	– 131
	2021–2023	9.8	15.3	– 199
	2024–2026	15.7	20.5	– 246
	2027+	17.9	26.9	– 304
Combination Short-haul Tractor-Trailers <sup>387</sup>	2018–2020	4.0	1.6	– 41
	2021–2023	10.5	9.3	– 79
	2024–2026	13.9	12.3	– 100
	2027+	17.6	15.9	– 127
Intercity Buses	2021–2023	6.5	0	0
	2024–2026	9.2	0	0
	2027+	16.5	0	0
Transit Buses	2021–2023	0	0	0
	2024–2026	2.9	0	0
	2027+	3.0	0	0
School Buses	2021–2023	0	0	0
	2024–2026	2.9	0	0
	2027+	4.0	0	0
Refuse Trucks	2021–2023	0	0	20
	2024–2026	2.9	0	20
	2027+	3.0	0	25
Single Unit Short-haul Trucks	2021–2023	4.8	0	5.8
	2024–2026	8.3	0	5.8
	2027+	13.0	0	7
Single Unit Long-haul Trucks	2021–2023	6.5	0	20
	2024–2026	9.2	0	20
	2027+	16.5	0	25
Motor Homes	2021–2023	3.0	0	0
	2024–2026	6.2	0	0
	2027+	7.4	0	0

**Note:**

<sup>a</sup> Negative weight reductions reflect an expected weight increase as a byproduct of other vehicle and engine improvements, as described in Chapter 5 of the draft RIA.

In addition, the proposed CO<sub>2</sub> standard for tractors reflecting the use of auxiliary power units (APU) during extended idling, as discussed in Section III.D of the preamble, was included in the modeling for the long-haul combination tractor-trailers, as shown below in Table VII-3.

TABLE VII-3—ASSUMED APU USE DURING EXTENDED IDLING FOR COMBINATION LONG-HAUL TRACTOR-TRAILERS

Vehicle type	Model year	APU penetration <sup>a</sup> (percent)
Combination Long-Haul Trucks	2010–2020	30
	2021–2023	80

<sup>387</sup> Vocational tractors are included in the short-haul tractor segment.

TABLE VII-3—ASSUMED APU USE DURING EXTENDED IDLING FOR COMBINATION LONG-HAUL TRACTOR-TRAILERS—Continued

Vehicle type	Model year	APU penetration <sup>a</sup> (percent)
	2024+	90

**Note:**

<sup>a</sup> The assumed APU penetration remains constant for model years 2024 and later.

To account for the potential increase in vehicle use expected to result from improvements in fuel efficiency for vocational vehicles and combination tractor-trailers due to the proposed rules (also known as the “rebound effect” and described in more detail in Chapter 5 of the draft RIA), the control case assumed an increase in VMT from the reference levels by 1.83 percent for the vocational vehicles and 0.79 percent for the combination tractor-trailers.

## (b) Heavy-Duty Pickups and Vans

As explained above and as also discussed in the draft RIA, the agencies used both DOT’s CAFE model and EPA’s MOVES model, for Method A and B, respectively, to project fuel consumption and GHG emissions impacts resulting from the proposed standards for HD pickups and vans, including downstream vehicular emissions as well as emissions from upstream processes related to fuel production, distribution, and delivery.

## (i) Method A for HD Pickups and Vans

For Method A, the agencies used the CAFE model which applies fuel properties (density and carbon content) to estimated fuel consumption in order to calculate vehicular CO<sub>2</sub> emissions, applies per-mile emission factors from MOVES to estimated VMT (for each regulatory alternative, adjusted to account for the rebound effect) in order to calculate vehicular CH<sub>4</sub> and N<sub>2</sub>O emissions (as well, as discussed below, of non-GHG pollutants), and applies per-gallon upstream emission factors from GREET in order to calculate upstream GHG (and non-GHG) emissions.

As discussed above in Section VI, the proposed standards for HD pickups and

vans—that is, the functions defining fuel consumption and GHG targets that each depend work factor—increase in stringency by 2.5 percent annually during model years 2021–2027. The standards define targets specific to each vehicle model, but no vehicle is required to meet its target; instead, the production-weighted averages of the vehicle-specific targets define average fuel consumption and CO<sub>2</sub> emission rates that a given manufacturer’s overall fleet of produced vehicles is required to achieve. The standards are specified separately for gasoline and diesel vehicles, and vary with work factor. Work factors could change, and today’s analysis assumes that some applications of mass reduction could enable increased work factor in cases where manufacturers could increase a vehicle’s rated payload and/or towing capacity. Therefore, average required levels will depend on the mix of vehicles and work factors of the vehicles produced for sale in the U.S., and since these can only be estimated at this time, average required and achieved fuel consumption and CO<sub>2</sub> emission rates are subject to uncertainty. Between today’s notice and issuance of the ensuing final rule, the agencies intend to update the market forecast (and other inputs) used to analyze HD pickup and van standards, and expect that doing so will lead to different estimates of required and achieved fuel consumption and CO<sub>2</sub> emission rates (as well as different estimates of impacts, costs, and benefits).

The following four tables present stringency increases and estimated required and achieved fuel consumption and CO<sub>2</sub> emission rates for the two No Action Alternatives (Alternative 1a and

1b) and the proposed standards defining the Preferred Alternative. Stringency increases are shown relative to standards applicable in model year 2018 (and through model year 2020). As mathematical functions, the standards themselves are not subject to uncertainty. By 2027, they are 16.2 percent more stringent (*i.e.*, lower) than those applicable during 2018–2020. NHTSA estimates that, by model 2027, the proposed standards could reduce average required fuel consumption and CO<sub>2</sub> emission rates to about 4.86 gallons/100 miles and about 458 grams/mile, respectively. NHTSA further estimates that average achieved fuel consumption and CO<sub>2</sub> emission rates could correspondingly be reduced to about the same levels. If, as represented by Alternative 1b, manufacturers would, even absent today’s proposed standards, voluntarily make improvements that pay back within six months, these model year 2027 levels are about 13.5 percent lower than the agencies estimate could be achieved under the Phase 1 standards defining the No Action Alternative. If, as represented by Alternative 1a, manufacturers would, absent today’s proposed standards, only apply technology as required to achieve compliance, these model year 2027 levels are about 15 percent lower than the agencies estimate could be achieved under the Phase 1 standards. As indicated below, the agencies estimate that these improvements in fuel consumption and CO<sub>2</sub> emission rates would build from model year to model year, beginning as soon as model year 2017 (insofar as manufacturers may make anticipatory improvements if warranted given planned produce cadence).

TABLE VII-4—STRINGENCY OF HD PICKUP AND VAN STANDARDS, ESTIMATED AVERAGE REQUIRED AND ACHIEVED FUEL CONSUMPTION RATES FOR METHOD A, RELATIVE TO ALTERNATIVE 1b<sup>a</sup>

Model year	Stringency (vs. 2018) (%)	Ave. required fuel cons. (gal./100 mi.)			Ave. achieved fuel cons. (gal./100 mi.)		
		No action	Proposed	Reduction (%)	No action	Proposed	Reduction (%)
2014 .....	MYs 2014–2020 Subject to Phase 1 Standards.	6.41	6.41	0.0	6.21	6.21	0.0
2015 .....		6.41	6.41	0.0	6.12	6.12	0.0
2016 .....		6.27	6.27	0.0	6.15	6.15	0.0
2017 .....		6.11	6.11	0.0	5.89	5.88	0.2
2018 .....		5.80	5.80	0.0	5.75	5.70	0.8
2019 .....	2.5 .....	5.78	5.78	0.0	5.72	5.68	0.7
2020 .....		5.78	5.78	0.0	5.69	5.64	0.8
2021 .....		5.77	5.64	2.2	5.63	5.42	3.8
2022 .....		5.77	5.50	4.7	5.63	5.42	3.8
2023 .....		5.77	5.38	6.8	5.63	5.28	6.3
2024 .....		5.77	5.25	9.0	5.63	5.23	7.1
2025 .....		5.77	5.12	11.4	5.63	4.99	11.5
2026 .....		5.77	4.98	13.7	5.63	4.93	12.5
2027 .....		5.77	4.86	15.8	5.62	4.86	13.7
2028* .....		5.77	4.86	15.8	5.62	4.86	13.7
2029* .....	16.2 .....	5.77	4.86	15.8	5.62	4.85	13.7
2030* .....		5.77	4.86	15.8	5.62	4.85	13.7

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

\*Absent further action, standards assumed to continue unchanged after model year 2027.

TABLE VII-5—STRINGENCY OF HD PICKUP AND VAN STANDARDS, ESTIMATED AVERAGE REQUIRED AND ACHIEVED CO<sub>2</sub> EMISSION RATES FOR METHOD A, RELATIVE TO ALTERNATIVE 1B<sup>A</sup>

Model year	Stringency (vs. 2018) (%)	Ave. required CO <sub>2</sub> Rate (g./mi.)		Ave. achieved CO <sub>2</sub> Rate (g./mi.)			
		No action	Proposed	Reduction	No Action	Proposed	Reduction (%)
2014 .....	MYs 2014–2020 Subject to Phase 1 Standards.	602	602	0.0	581	581	0.0
2015 .....		608	608	0.0	578	578	0.0
2016 .....		593	593	0.0	580	580	0.0
2017 .....		578	578	0.0	556	554	0.2
2018 .....		548	548	0.0	543	538	0.8
2019 .....	2.5 .....	545	545	0.0	539	535	0.7
2020 .....		545	545	0.0	536	532	0.8
2021 .....		544	532	2.2	530	510	3.8
2022 .....		544	519	4.7	530	510	3.8
2023 .....		544	507	6.8	530	496	6.4
2024 .....		544	495	9.1	530	492	7.2
2025 .....		544	482	11.3	530	470	11.3
2026 .....		544	470	13.6	530	465	12.3
2027 .....		544	458	15.8	529	458	13.4
2028* .....		544	458	15.8	529	458	13.4
2029* .....	16.2 .....	544	458	15.8	529	458	13.5
2030* .....		544	458	15.8	529	458	13.5

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

\*Absent further action, standards assumed to continue unchanged after model year 2027.

TABLE VII-6—STRINGENCY OF HD PICKUP AND VAN STANDARDS, ESTIMATED AVERAGE REQUIRED AND ACHIEVED FUEL CONSUMPTION RATES FOR METHOD A, RELATIVE TO ALTERNATIVE 1a<sup>a</sup>

Model year	Stringency (vs. 2018)(%)	Ave. required fuel cons. (gal./100 mi.)			Ave. achieved fuel cons. (gal./100 mi.)		
		No action	Proposed	Reduction (%)	No Action	Proposed	Reduction (%)
2014 .....	MYs 2014–2020 Subject to Phase 1 Standards.	6.41	6.41	0.0	6.21	6.21	0.0
2015 .....		6.41	6.41	0.0	6.12	6.12	0.0
2016 .....		6.27	6.27	0.0	6.15	6.15	0.0
2017 .....		6.11	6.11	0.0	5.89	5.87	0.3
2018 .....		5.80	5.80	**^0.0	5.75	5.70	0.9
2019 .....	2.5 .....	5.78	5.78	0.0	5.73	5.68	0.8
2020 .....		5.78	5.78	0.0	5.73	5.68	0.8
2021 .....		5.77	5.64	2.3	5.72	5.44	4.8
2022 .....		5.77	5.50	4.7	5.72	5.44	4.8
2023 .....		5.77	5.38	6.8	5.72	5.29	7.6

TABLE VII-6—STRINGENCY OF HD PICKUP AND VAN STANDARDS, ESTIMATED AVERAGE REQUIRED AND ACHIEVED FUEL CONSUMPTION RATES FOR METHOD A, RELATIVE TO ALTERNATIVE 1a<sup>a</sup>—Continued

Model year	Stringency (vs. 2018)(%)	Ave. required fuel cons. (gal./100 mi.)			Ave. achieved fuel cons. (gal./100 mi.)		
		No action	Proposed	Reduction (%)	No Action	Proposed	Reduction (%)
2024 .....	9.6 .....	5.77	5.25	9.1	5.72	5.23	8.5
2025 .....	11.9 .....	5.77	5.12	11.4	5.72	4.98	12.9
2026 .....	14.1 .....	5.77	4.98	13.7	5.72	4.94	13.6
2027 .....	16.2 .....	5.77	4.86	15.8	5.72	4.87	14.9
2028* .....	16.2 .....	5.77	4.86	15.8	5.72	4.87	14.9
2029* .....	16.2 .....	5.77	4.86	15.8	5.72	4.86	15.0
2030* .....	16.2 .....	5.77	4.86	15.8	5.72	4.86	15.0

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

\*Absent further action, standards assumed to continue unchanged after model year 2027.

\*\*Increased work factor for some vehicles produces a slight increase in average required fuel consumption.

TABLE VII-7—STRINGENCY OF HD PICKUP AND VAN STANDARDS, ESTIMATED AVERAGE REQUIRED AND ACHIEVED CO<sub>2</sub> EMISSION RATES FOR METHOD A, RELATIVE TO ALTERNATIVE 1A<sup>A</sup>

Model year	Stringency (vs. 2018) (%)	Ave. required CO <sub>2</sub> Rate (g./mi.)			Ave. achieved CO <sub>2</sub> Rate (g./mi.)		
		No action	Proposed	Reduction (%)	No action	Proposed	Reduction (%)
2014 .....	MYs 2014–2020 Subject to Phase 1 Standards.	6.02	602	0.0	581	581	0.0
2015 .....		6.08	608	0.0	578	578	0.0
2016 .....		593	593	0.0	580	580	0.0
2017 .....		578	578	0.0	556	554	0.3
2018 .....		548	548	** –0.0	543	538	0.9
2019 .....	2.5 .....	545	546	** –0.1	539	535	0.8
2020 .....		545	545	** –0.1	539	535	0.8
2021 .....		544	532	2.2	538	512	4.9
2022 .....		544	519	4.7	538	512	4.9
2023 .....		544	507	6.8	538	497	7.7
2024 .....	9.6 .....	544	495	9.1	538	492	8.6
2025 .....	11.9 .....	544	482	11.4	538	470	12.7
2026 .....	14.1 .....	544	470	13.6	538	466	13.4
2027 .....	16.2 .....	544	458	15.8	538	459	14.7
2028* .....	16.2 .....	544	458	15.8	538	459	14.7
2029* .....	16.2 .....	544	458	15.8	538	459	14.8
2030* .....	16.2 .....	544	458	15.8	538	459	14.8

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

\*Absent further action, standards assumed to continue unchanged after model year 2027.

\*\*Increased work factor for some vehicles produces a slight increase in the average required CO<sub>2</sub> emission rate.

While the above tables show the agencies' estimates of average fuel consumption and CO<sub>2</sub> emission rates manufacturers might achieve under today's proposed standards, total U.S. fuel consumption and GHG emissions from HD pickups and vans will also depend on how many of these vehicles are produced, and how they are operated over their useful lives. Relevant to estimating these outcomes, the CAFE model applies vintage-specific estimates of vehicle survival and

mileage accumulation, and adjusts the latter to account for the rebound effect. This impact of the rebound effect is specific to each model year (and, underlying, to each vehicle model in each model year), varying with changes in achieved fuel consumption rates.

## (ii) Method B for HD Pickups and Vans

For Method B, the MOVES model was used to estimate fuel consumption and GHG emissions for HD pickups and vans. MOVES evaluated the proposed

standards for HD pickup trucks and vans in terms of grams of CO<sub>2</sub> per mile or gallons of fuel per 100 miles. Since nearly all HD pickup trucks and vans are certified on a chassis dynamometer, the CO<sub>2</sub> reductions for these vehicles were not represented as engine and road load reduction components, but rather as total vehicle CO<sub>2</sub> reductions. The control case for HD pickups and vans assumed an increase in VMT from the reference levels by 1.18 percent for HD pickups and vans.

TABLE VII-8—ESTIMATED TOTAL VEHICLE CO<sub>2</sub> REDUCTIONS FOR THE PROPOSED STANDARDS AND IN-USE EMISSIONS FOR HD PICKUP TRUCKS AND VANS IN METHOD B<sup>a</sup>

Vehicle type	Fuel	Model year	CO <sub>2</sub> reduction from reference case (%)
HD pickup trucks and vans .....	Gasoline and Diesel .....	2021	2.50
		2022	4.94
		2023	7.31
		2024	9.63
		2025	11.89
		2026	14.09
		2027+	16.24

**Notes:**

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

*C. What are the projected reductions in fuel consumption and GHG emissions?*

NHTSA and EPA expect significant reductions in GHG emissions and fuel consumption from the proposed rules—fuel consumption reductions from more efficient vehicles, emission reductions from both downstream (tailpipe) and upstream (fuel production and distribution) sources, and HFC emissions from the proposed air conditioning leakage standards. The following subsections summarize two slightly different analyses of the annual GHG emissions and fuel consumption reductions expected from these proposed rules, as well as the reductions in GHG emissions and fuel consumption expected over the lifetime of each heavy-duty vehicle categories. In addition, because the agencies are carefully considering Alternative 4 along with Alternative 3, the preferred alternative, the results from both are presented here for the reader's reference. Section VII. C. (1) shows the impacts of the proposed rules and Alternative 4 on fuel consumption and GHG emissions using the MOVES model for tractor-trailers and vocational

vehicles, and the DOT's CAFE model for HD pickups and vans (Method A), relative to two different reference cases—less dynamic and more dynamic. Section VII. C. (2) shows the impacts of the proposed standards and Alternative 4, relative to the less dynamic reference case only, using the MOVES model for all heavy-duty vehicle categories. NHTSA also analyzes these impacts resulting from the proposed rules and reasonable alternatives in Chapters 3 and 5 of its DEIS.

(1) Impacts of the Proposed Rules and Alternative 4 Using Analysis Method A

(a) Calendar Year Analysis

(i) Downstream (Tailpipe) Emissions Projections

As described in Section VII. A, for the analysis using Method A, the agencies used MOVES to estimate downstream GHG inventories from the proposed rules for vocational vehicles and tractor-trailers. For HD pickups and vans, DOT's CAFE model was used.

The following two tables summarize the agencies' estimates of HD pickup and van fuel consumption and GHG emissions under the current and

proposed standards defining the No-Action and Preferred alternatives, respectively, using Method A. Table VII-9 shows results assuming manufacturers would voluntarily make improvements that pay back within six months (*i.e.*, Alternative 1b). Table VII-10 shows results assuming manufacturers would only make improvements as needed to achieve compliance with standards (*i.e.*, Alternative 1a). While underlying calculations are all performed for each calendar year during each vehicle's useful life, presentation of outcomes on a model year basis aligns more clearly with consideration of cost impacts in each model year, and with consideration of standards specified on a model year basis. In addition, Method A analyzes manufacturers' potential responses to HD pickup and van standards on a model year basis through 2030, and any longer-term costs presented in today's notice represent extrapolation of these results absent any underlying analysis of longer-term technology prospects and manufacturers' longer-term product offerings.

TABLE VII-9—ESTIMATED FUEL CONSUMPTION AND GHG EMISSIONS OVER USEFUL LIFE OF HD PICKUPS AND VANS PRODUCED IN EACH MODEL YEAR FOR METHOD A, RELATIVE TO ALTERNATIVE 1b<sup>a</sup>

Model year	Fuel consumption (b. gal.) over fleet's useful life			GHG emissions (MMT CO <sub>2</sub> eq) over fleet's useful life		
	No action	Proposed	Reduction (%)	No action	Proposed	Reduction (%)
2014 .....	9.41	9.41	0.0	115	115	0.0
2015 .....	9.53	9.53	0.0	117	117	0.0
2016 .....	9.72	9.72	0.0	119	119	0.0
2017 .....	9.49	9.47	0.2	116	116	0.2
2018 .....	9.26	9.19	0.7	113	113	0.7
2019 .....	9.20	9.14	0.7	113	112	0.7
2020 .....	9.19	9.12	0.7	112	112	0.7
2021 .....	9.10	8.79	3.4	111	107	3.4
2022 .....	9.13	8.82	3.4	112	108	3.4
2023 .....	9.11	8.59	5.7	111	105	5.7
2024 .....	9.32	8.72	6.4	114	107	6.4

TABLE VII-9—ESTIMATED FUEL CONSUMPTION AND GHG EMISSIONS OVER USEFUL LIFE OF HD PICKUPS AND VANS PRODUCED IN EACH MODEL YEAR FOR METHOD A, RELATIVE TO ALTERNATIVE 1b<sup>a</sup>—Continued

Model year	Fuel consumption (b. gal.) over fleet's useful life			GHG emissions (MMT CO <sub>2</sub> eq) over fleet's useful life		
	No action	Proposed	Reduction (%)	No action	Proposed	Reduction (%)
2025 .....	9.49	8.49	10.5	116	104	10.4
2026 .....	9.67	8.56	11.5	118	105	11.3
2027 .....	9.78	8.55	12.6	120	105	12.3
2028 .....	9.90	8.66	12.6	121	106	12.3
2029 .....	10.02	8.75	12.6	122	107	12.4
2030 .....	10.03	8.76	12.6	123	107	12.4

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII-10—ESTIMATED FUEL CONSUMPTION AND GHG EMISSIONS OVER USEFUL LIFE OF HD PICKUPS AND VANS PRODUCED IN EACH MODEL YEAR FOR METHOD A, RELATIVE TO ALTERNATIVE 1a<sup>a</sup>

Model year	Fuel consumption (b. gal.) over fleet's useful life			GHG Emissions (MMT CO <sub>2</sub> eq) over fleet's useful life		
	No action	Proposed	Reduction (%)	No action	Proposed	Reduction (%)
2014 .....	9.41	9.41	0.0	115	115	0.0
2015 .....	9.53	9.53	0.0	117	117	0.0
2016 .....	9.72	9.72	0.0	119	119	0.0
2017 .....	9.49	9.46	0.3	116	116	0.3
2018 .....	9.27	9.19	0.8	114	113	0.8
2019 .....	9.20	9.14	0.7	113	112	0.7
2020 .....	9.25	9.18	0.7	113	112	0.8
2021 .....	9.23	8.82	4.4	113	108	4.4
2022 .....	9.26	8.85	4.4	113	108	4.4
2023 .....	9.23	8.60	6.9	113	105	6.9
2024 .....	9.45	8.72	7.7	116	107	7.7
2025 .....	9.62	8.48	11.8	118	104	11.7
2026 .....	9.81	8.58	12.5	120	105	12.3
2027 .....	9.93	8.57	13.7	121	105	13.5
2028 .....	10.05	8.68	13.7	123	106	13.5
2029 .....	10.17	8.77	13.7	124	108	13.5
2030 .....	10.18	8.78	13.7	124	108	13.5


**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

To more clearly communicate these trends visually, the following two charts present the above results graphically for Method A, relative to Alternative 1b. As shown, fuel consumption and GHG


emissions follow parallel though not precisely identical paths. Though not presented, the charts for Alternative 1a would appear sufficiently similar that differences between Alternative 1a and

Alternative 1b remain best communicated by comparing values in the above tables.

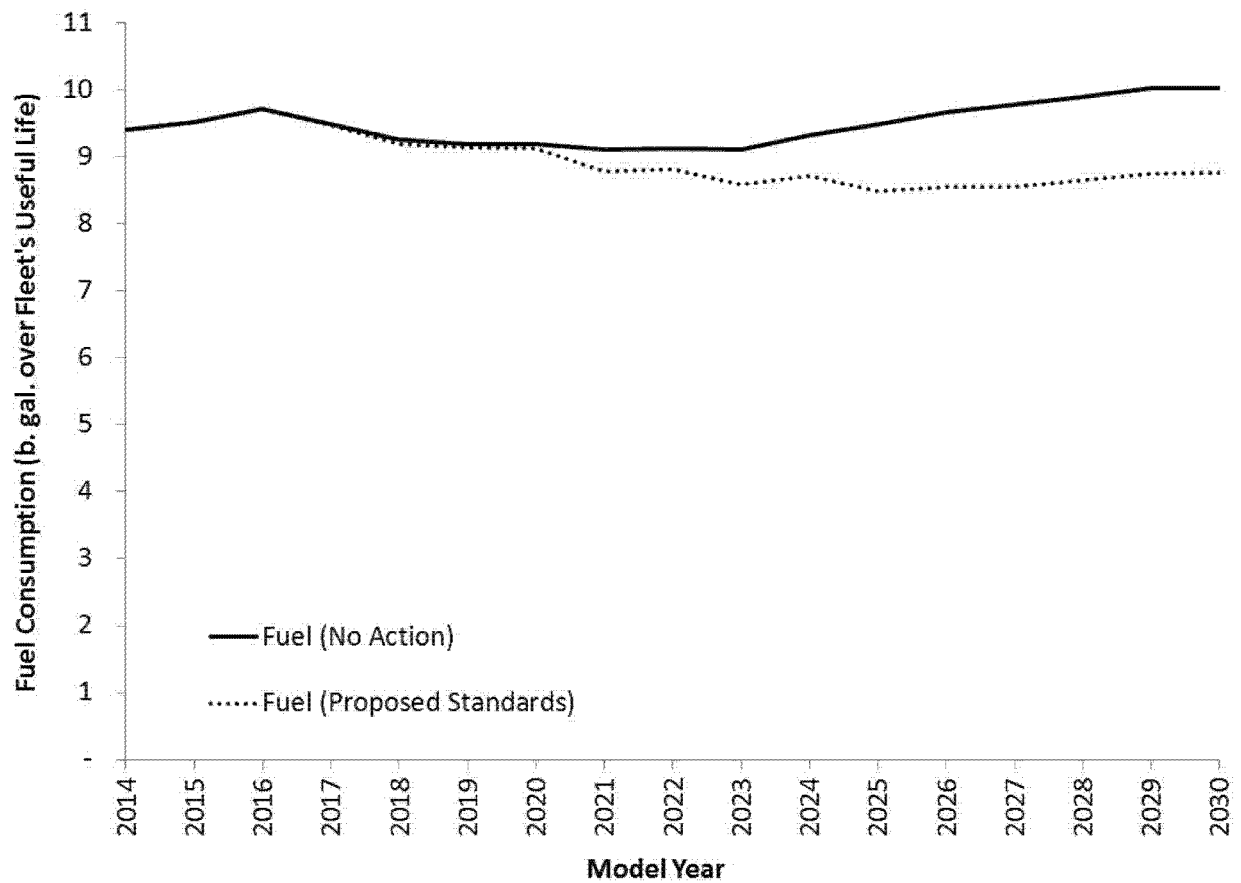

**Figure VII-9 Fuel Consumption (b. gal.) over Useful Life of HD Pickups and Vans Produced in Each Model Year for Method A**



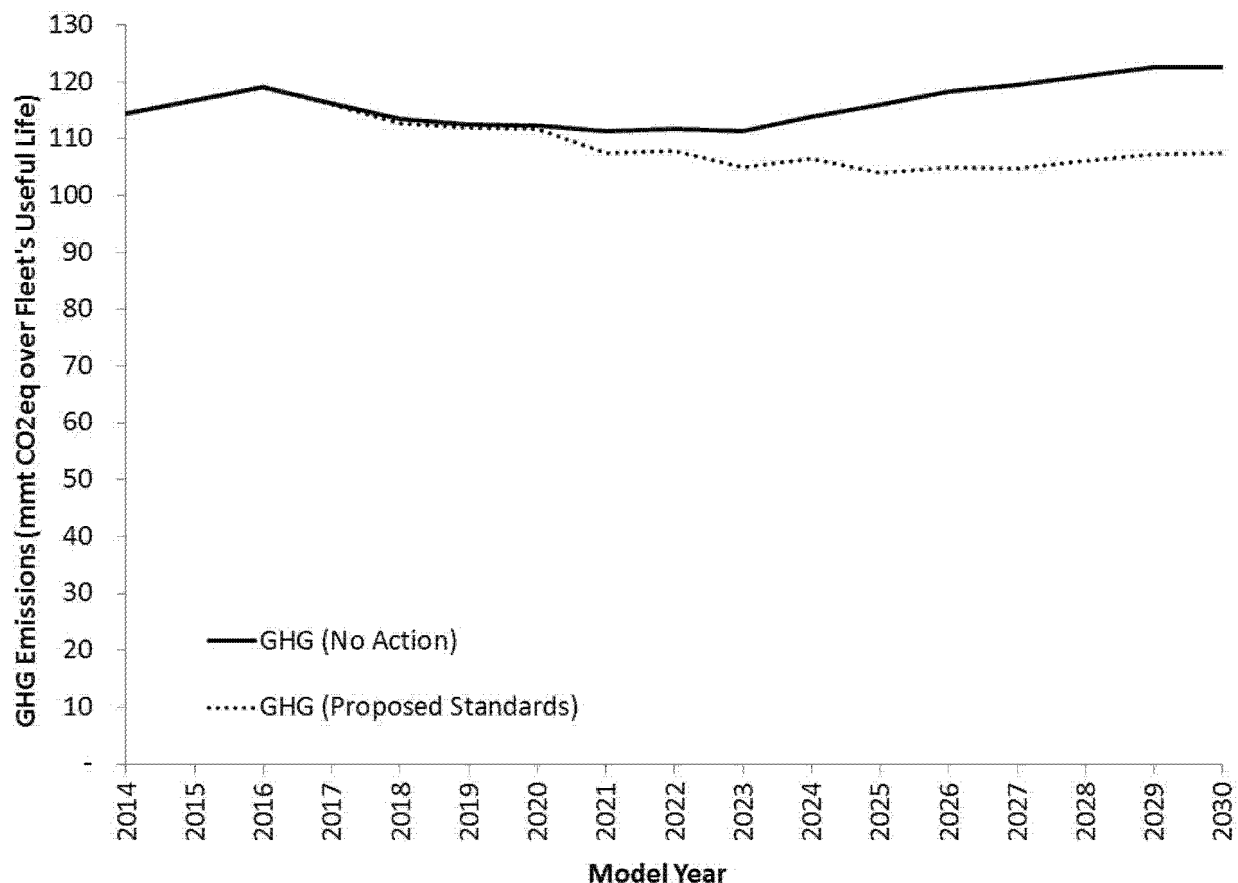

**Figure VII-10 GHG Emissions (MMT CO<sub>2</sub>eq) over Useful Life of HD Pickups and Vans Produced in Each Model Year for Method A**

**TABLE VII-11 ANNUAL DOWNSTREAM GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>**

CY	CO <sub>2</sub> (MMT)	CH <sub>4</sub> (MMT CO <sub>2</sub> eq)	N <sub>2</sub> O (MMT CO <sub>2</sub> eq) <sup>9</sup>	Total down- stream (MMT CO <sub>2</sub> eq)
2025 .....	-26.9	-0.4	0	-27.2
2035 .....	-86.0	-1.0	0	-86.9
2050 .....	-121.6	-1.4	0	-123.0

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

**TABLE VII-12—ANNUAL FUEL SAVINGS IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>**

CY	Diesel savings (billion gallons)	Gasoline savings (billion gallons)
2025 .....	2.5	0.2
2035 .....	7.6	0.9
2050 .....	10.8	1.2

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII-13—ANNUAL DOWNSTREAM GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1a USING ANALYSIS METHOD A<sup>a</sup>

CY	CO <sub>2</sub> (MMT)	CH <sub>4</sub> (MMT CO <sub>2</sub> eq)	N <sub>2</sub> O (MMT CO <sub>2</sub> eq) <sup>9</sup>	Total down- stream (MMT CO <sub>2</sub> eq)
2025 .....	- 27.7	- 0.4	0	- 28.1
2035 .....	- 93.6	- 1.0	0	- 94.6
2050 .....	- 133.5	- 1.4	0	- 134.9

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII-14—ANNUAL FUEL SAVINGS IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1a USING ANALYSIS METHOD A<sup>a</sup>

CY	Diesel sav- ings (billion gal- lons)	Gasoline savings (billion gal- lons)
2025 .....	2.5	0.2
2035 .....	8.3	1.0

TABLE VII-14—ANNUAL FUEL SAVINGS IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1a USING ANALYSIS METHOD A<sup>a</sup>—Continued

CY	Diesel sav- ings (billion gal- lons)	Gasoline savings (billion gal- lons)
2050 .....	11.9	1.3

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII-15—ANNUAL DOWNSTREAM GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>

CY	CO <sub>2</sub> (MMT)	CH <sub>4</sub> (MMT CO <sub>2</sub> eq)	N <sub>2</sub> O (MMT CO <sub>2</sub> eq) <sup>9</sup>	Total down- stream (MMT CO <sub>2</sub> eq)
2025 .....	- 33.2	- 0.4	0	- 33.5
2035 .....	- 89.9	- 1.0	0	- 90.9
2050 .....	- 122.6	- 1.4	0	- 124.0

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII-16—ANNUAL FUEL SAVINGS IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>

CY	Diesel sav- ings (billion gal- lons)	Gasoline savings (billion gal- lons)
2025 .....	3.0	0.3
2035 .....	7.9	1.0

TABLE VII-16—ANNUAL FUEL SAVINGS IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>—Continued

CY	Diesel sav- ings (billion gal- lons)	Gasoline savings (billion gal- lons)
2050 .....	10.8	1.3

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII-17—ANNUAL DOWNSTREAM GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1a USING ANALYSIS METHOD A<sup>a</sup>

CY	CO <sub>2</sub> (MMT)	CH <sub>4</sub> (MMT CO <sub>2</sub> eq)	N <sub>2</sub> O (MMT CO <sub>2</sub> eq) <sup>9</sup>	Total down- stream (MMT CO <sub>2</sub> eq)
2025 .....	- 34.3	- 0.4	0	- 34.6
2035 .....	- 97.7	- 1.0	0	- 98.7
2050 .....	- 134.6	- 1.4	0	- 136.0

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII-18—ANNUAL FUEL SAVINGS IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1A USING ANALYSIS METHOD A<sup>a</sup>

CY	Diesel savings (billion gallons)	Gasoline savings (billion gallons)
2025 .....	3.1	0.3
2035 .....	8.6	1.1

TABLE VII-18—ANNUAL FUEL SAVINGS IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1A USING ANALYSIS METHOD A<sup>a</sup>—Continued

CY	Diesel savings (billion gallons)	Gasoline savings (billion gallons)
2050 .....	12.0	1.3

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

(ii) Upstream (Fuel Production and Distribution) Emissions Projections

TABLE VII-19—ANNUAL UPSTREAM GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>

CY	CO <sub>2</sub> (MMT)	CH <sub>4</sub> (MMT CO <sub>2</sub> eq)	N <sub>2</sub> O (MMT CO <sub>2</sub> eq)	Total upstream (MMT CO <sub>2</sub> eq)
2025 .....	-8.4	-0.9	-0.1	-9.3
2035 .....	-26.6	-2.8	-0.2	-29.7
2050 .....	-37.7	-4.0	-0.3	-42.0

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII-20—ANNUAL UPSTREAM GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1A USING ANALYSIS METHOD A<sup>a</sup>

CY	CO <sub>2</sub> (MMT)	CH <sub>4</sub> (MMT CO <sub>2</sub> eq)	N <sub>2</sub> O (MMT CO <sub>2</sub> eq)	Total upstream (MMT CO <sub>2</sub> eq)
2025 .....	-8.6	-0.9	-0.1	-9.6
2035 .....	-29.0	-3.1	-0.2	-32.3
2050 .....	-41.4	-4.4	-0.3	-46.1

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII-21—ANNUAL UPSTREAM GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>

CY	CO <sub>2</sub> (MMT)	CH <sub>4</sub> (MMT CO <sub>2</sub> eq)	N <sub>2</sub> O (MMT CO <sub>2</sub> eq)	Total upstream (MMT CO <sub>2</sub> eq)
2025 .....	-10.3	-1.1	-0.1	-11.5
2035 .....	-27.8	-3.0	-0.2	-31.0
2050 .....	-38.0	-4.0	-0.3	-42.3

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII-22—ANNUAL UPSTREAM GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1a USING ANALYSIS METHOD A<sup>a</sup>

CY	CO <sub>2</sub> (MMT)	CH <sub>4</sub> (MMT CO <sub>2</sub> eq)	N <sub>2</sub> O (MMT CO <sub>2</sub> eq)	Total upstream (MMT CO <sub>2</sub> eq)
2025 .....	-10.6	-1.1	-0.1	-11.8
2035 .....	-30.2	-3.2	-0.2	-33.7
2050 .....	-41.7	-4.4	-0.3	-46.5

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

(iii) HFC Emissions Projections

The projected HFC emission reductions due to the proposed AC

leakage standards are 93,272 metric tons of CO<sub>2</sub>eq in 2025, 253,118 metric tons

of CO<sub>2</sub>eq in 2035, and 299,590 metric tons CO<sub>2</sub>eq in 2050.

(iv) Total (Downstream + Upstream + HFC) Emissions Projections

TABLE VII–23—ANNUAL TOTAL GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1b USING ANALYSIS METHOD A <sup>a</sup>

CY	2025 (MMT CO <sub>2</sub> eq)	2035 (MMT CO <sub>2</sub> eq)	2050 (MMT CO <sub>2</sub> eq)
Downstream .....	–27.2 .....	–86.9	–123.0
Upstream .....	–9.3 .....	–29.7	–42.0
HFC .....	–0.09 .....	–0.25	–0.3
Total .....	–36.4 .....	–116.4	–164.7

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII–24—ANNUAL TOTAL GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1a USING ANALYSIS METHOD A <sup>a</sup>

CY	2025 (MMT CO <sub>2</sub> eq)	2035 (MMT CO <sub>2</sub> eq)	2050 (MMT CO <sub>2</sub> eq)
Downstream .....	–28.1 .....	–94.6	–134.9
Upstream .....	–9.6 .....	–32.3	–46.1
HFC .....	–0.09 .....	–0.25	–0.3
Total .....	–37.6 .....	–126.4	–180.7

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII–25—ANNUAL TOTAL GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1b USING ANALYSIS METHOD A <sup>a</sup>

CY	2025 (MMT CO <sub>2</sub> eq)	2035 (MMT CO <sub>2</sub> eq)	2050 (MMT CO <sub>2</sub> eq)
Downstream .....	–33.5 .....	–90.9	–124.0
Upstream .....	–11.5 .....	–31.0	–42.3
HFC .....	–0.09 .....	–0.25	–0.3
Total .....	–44.9 .....	–121.7	–166.0

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII–26—ANNUAL TOTAL GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1a USING ANALYSIS METHOD A <sup>a</sup>

CY	2025 (MMT CO <sub>2</sub> eq)	2035 (MMT CO <sub>2</sub> eq)	2050 (MMT CO <sub>2</sub> eq)
Downstream .....	–34.6 .....	–98.7	–136.0
Upstream .....	–11.8 .....	–33.7	–46.5
HFC .....	–0.09 .....	–0.25	–0.3
Total .....	–46.3 .....	–132.2	–182.2

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

## (b) Model Year Lifetime Analysis

TABLE VII–27—LIFETIME GHG REDUCTIONS AND FUEL SAVINGS USING ANALYSIS METHOD A—SUMMARY FOR MODEL YEARS 2018–2029 <sup>a</sup>

	Alternative 3 (proposed)		Alternative 4	
	1b (More Dynamic)	1a (Less Dynamic)	1b (More Dynamic)	1a (Less Dynamic)
No–Action Alternative (Baseline)				
Fuel Savings (Billion Gallons) .....	72.2	76.7	81.9	86.7
Total GHG Reductions (MMT CO <sub>2</sub> eq) .....	974	1,034	1,102	1,166
Downstream (MMT CO <sub>2</sub> eq) .....	726.1	771.3	821.9	870.3
Upstream (MMT CO <sub>2</sub> eq) .....	247.7	262.9	279.9	296.1

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

(2) Impacts of the Proposed Rules and Alternative 4 using Analysis Method B

(a) Calendar Year Analysis

(i) Downstream (Tailpipe) Emissions Projections

As described in Section VII. A., the Method B used MOVES to estimate downstream GHG inventories from the proposed rules and Alternative 4 relative to Alternative 1a for all heavy-duty vehicle categories (including the engines associated with tractor-trailer combinations and vocational vehicles). The agencies expect reductions in CO<sub>2</sub> emissions from all heavy-duty vehicle categories due to engine and vehicle improvements. We expect N<sub>2</sub>O emissions to increase very slightly because of a rebound in vehicle miles traveled (VMT). However, since N<sub>2</sub>O is produced as a byproduct of fuel combustion, the increase in N<sub>2</sub>O

emissions is expected to be more than offset by the improvements in fuel efficiency from the proposed rules.<sup>388</sup> We expect methane emissions to decrease primarily due to reduced refueling from improved fuel efficiency and the differences in hydrocarbon emission characteristics between on-road diesel engines and APUs. The amount of methane emitted as a fraction of total hydrocarbons is expected to be significantly less for APUs than for on-road diesel engines during extended idling. Overall, the downstream GHG emissions would be reduced significantly and are described in the following subsections.

Since fuel consumption is not directly modeled in MOVES, the total energy consumption was run as a surrogate in MOVES. Then, the total energy consumption was converted to fuel consumption based on the fuel heating

values assumed in the Renewable Fuels Standard rulemaking<sup>389</sup> and used in the development of MOVES emission and energy rates.<sup>390</sup>

Table VII–28 and Table VII–29 show the impacts on downstream GHG emissions and fuel savings in 2025, 2035 and 2050, relative to Alternative 1a, for the preferred alternative and Alternative 4, respectively.

Table VII–30 and Table VII–31 show the estimated fuel savings from the preferred alternative and Alternative 4 in 2025, 2035, and 2050, relative to Alternative 1a. For both GHG emissions and fuel savings, the annual impacts are greater for Alternative 4 than the preferred alternative in earlier years, but the differences become indistinguishable by 2050. The results from the comparable analyses relative to Alternative 1b are presented in Section VII. C. (1).

TABLE VII–28—ANNUAL DOWNSTREAM GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1a USING ANALYSIS METHOD B <sup>a</sup>

CY	CO <sub>2</sub> (MMT)	CH <sub>4</sub> (MMT CO <sub>2</sub> eq)	N <sub>2</sub> O (MMT CO <sub>2</sub> eq)	Total downstream (MMT CO <sub>2</sub> eq)
2025 .....	– 27.0	– 0.4	0.002	– 27.4
2035 .....	– 93.7	– 1.0	0.004	– 94.7
2050 .....	– 135.1	– 1.4	0.005	– 136.5

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII–29—ANNUAL DOWNSTREAM GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1a USING ANALYSIS METHOD B <sup>a</sup>

CY	CO <sub>2</sub> (MMT)	CH <sub>4</sub> (MMT CO <sub>2</sub> eq)	N <sub>2</sub> O (MMT CO <sub>2</sub> eq)	Total downstream (MMT CO <sub>2</sub> eq)
2025 .....	– 33.3	– 0.4	0.002	– 33.7
2035 .....	– 97.3	– 1.0	0.004	– 98.3
2050 .....	– 135.5	– 1.4	0.005	– 136.9

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>388</sup> MOVES is not capable of modeling the changes in exhaust N<sub>2</sub>O emissions from the improvements in fuel efficiency. Due to this limitation, a conservative approach was taken to only model the VMT rebound in estimating the emissions impact on N<sub>2</sub>O from the proposed rules, resulting in a slight increase in downstream N<sub>2</sub>O inventory.

<sup>389</sup> Renewable Fuels Standards assumptions of 115,000 BTU/gallon gasoline (E0) and 76,330 BTU/gallon ethanol (E100) were weighted 90% and 10%, respectively, for E10 and 85% and 15%, respectively, for E15 and converted to kJ at 1.055 kJ/BTU. The conversion factors are 117,245 kJ/gallon for gasoline blended with ten percent ethanol

(E10) and 115,205 kJ/gallon for gasoline blended with fifteen percent ethanol (E15).

<sup>390</sup> The conversion factor for diesel is 138,451 kJ/gallon. See MOVES2004 Energy and Emission Inputs. EPA420–P–05–003, March 2005. <http://www.epa.gov/otaq/models/ngm/420p05003.pdf> (last accessed Feb 23, 2015).

TABLE VII-30—ANNUAL FUEL SAVINGS IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1a USING ANALYSIS METHOD B<sup>a</sup>

CY	Diesel savings (billion gallons)	Gasoline savings (billion gallons)
2025 .....	2.5	0.2
2035 .....	8.5	0.8
2050 .....	12.3	1.1

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII-31—ANNUAL FUEL SAVINGS IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1a USING ANALYSIS METHOD B<sup>a</sup>

CY	Diesel savings (billion gallons)	Gasoline savings (billion gallons)
2025 .....	3.1	0.3
2035 .....	8.8	0.9
2050 .....	12.3	1.1

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

## (ii) Upstream (Fuel Production and Distribution) Emissions Projections

The upstream GHG emission reductions associated with the production and distribution of gasoline and diesel from crude oil were based on emission factors from DOE's

“Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation” (GREET) model. In some cases, the GREET values were modified or updated by the agencies to be consistent with EPA's National Emissions Inventory (NEI), and emission factors from MOVES. More information regarding these modifications can be found in Chapter 5 of the draft RIA. These estimates show the impacts for domestic emission reductions only. Additionally, since this rulemaking is not expected to impact biofuel volumes mandated by the Annual Renewable Fuel Standards (RFS) regulations<sup>391</sup>, the impacts on upstream emissions from changes in biofuel feedstock (*i.e.*, agricultural sources such as fertilizer, fugitive dust, and livestock) are not shown. GHG emission reductions from upstream sources can be found in Table VII-32 and Table VII-33 for preferred alternative and Alternative 4, respectively.

TABLE VII-32—ANNUAL UPSTREAM GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1a USING ANALYSIS METHOD B<sup>a</sup>

CY	CO <sub>2</sub> (MMT)	CH <sub>4</sub> (MMT CO <sub>2</sub> eq)	N <sub>2</sub> O (MMT CO <sub>2</sub> eq)	Total upstream (MMT CO <sub>2</sub> eq)
2025 .....	– 8.4	– 0.9	– 0.04	– 9.3
2035 .....	– 29.1	– 3.0	– 0.14	– 32.2
2050 .....	– 41.9	– 4.4	– 0.20	– 46.5

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII-33—ANNUAL UPSTREAM GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1a USING ANALYSIS METHOD B<sup>a</sup>

CY	CO <sub>2</sub> (MMT)	CH <sub>4</sub> (MMT CO <sub>2</sub> eq)	N <sub>2</sub> O (MMT CO <sub>2</sub> eq)	Total upstream (MMT CO <sub>2</sub> eq)
2025 .....	– 10.4	– 1.0	– 0.1	– 11.5
2035 .....	– 30.1	– 3.2	– 0.1	– 33.4
2050 .....	– 42.0	– 4.4	– 0.2	– 46.6

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

## (iii) HFC Emissions Projections

Based on projected HFC emission reductions due to the proposed AC leakage standards, EPA estimates the HFC reductions to be 93,272 metric tons of CO<sub>2</sub>eq in 2025, 253,118 metric tons of CO<sub>2</sub>eq in 2035, and 299,590 metric tons CO<sub>2</sub>eq in 2050, as detailed in Chapters 5.3.4 of the draft RIA. EPA

welcomes comments on the methodology used to quantify the HFC emissions benefits, as detailed in Chapter 5 of the draft RIA.

## (iv) Total (Downstream + Upstream + HFC) Emissions Projections

Table VII-34 combines the impacts of the preferred alternative from downstream (Table VII-28), upstream

(Table VII-32), and HFC to summarize the total GHG reductions in calendar years 2025, 2035 and 2050, relative to Alternative 1a. The combined impact of Alternative 4 on total GHG emissions are shown in Table VII-35.

Because of the differences in lead time, as expected, Alternative 4 shows greater annual GHG reductions in earlier years (*i.e.*, calendar year 2025), but by

<sup>391</sup> U.S. EPA. 2014 Standards for the Renewable Fuel Standard Program. 40 CFR part 80. EPA-HQ-

OAR-2013-0479; FRL-9900-90-OAR, RIN 2060-AR76.

2050, the preferred alternative and Alternative 4 show the same magnitude of reductions in annual GHG emissions.

TABLE VII–34—ANNUAL TOTAL GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1a USING ANALYSIS METHOD B<sup>a</sup>

CY	2025 (MMT CO <sub>2</sub> eq)	2035 (MMT CO <sub>2</sub> eq)	2050 (MMT CO <sub>2</sub> eq)
Downstream .....	– 27.4	– 94.7	– 136.5
Upstream .....	– 9.3	– 32.2	– 46.5
HFC .....	– 0.1	– 0.25	– 0.3
Total .....	– 36.8	– 127.2	– 183.3

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VII–35—ANNUAL TOTAL GHG EMISSIONS IMPACTS IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1a USING ANALYSIS METHOD B<sup>a</sup>

CY	2025 (MMT CO <sub>2</sub> eq)	2035 (MMT CO <sub>2</sub> eq)	2050 (MMT CO <sub>2</sub> eq)
Downstream .....	– 33.7	– 98.3	– 136.9
Upstream .....	– 11.5	– 33.4	– 46.6
HFC .....	– 0.1	– 0.25	– 0.3
Total .....	– 45.3	– 132.0	– 183.8

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

(b) Model Year Lifetime Analysis

In addition to the annual GHG emissions and fuel consumption reductions expected from the proposed rules and Alternative 4, the combined (downstream and upstream) GHG and fuel consumption impacts for the

lifetime of the impacted vehicles were estimated. Table VII–36 shows the fleet-wide GHG reductions and fuel savings from the preferred alternative and Alternative 4, relative to Alternative 1a, through the lifetime<sup>392</sup> of heavy-duty vehicles. Compared to the preferred

alternative, Alternative 4 shows greater lifetime GHG reductions and fuels savings by 12 percent and 13 percent, respectively. For the lifetime GHG reductions and fuel savings by vehicle categories, see Chapter 5 of the draft RIA.

TABLE VII–36—LIFETIME GHG REDUCTIONS AND FUEL SAVINGS USING ANALYSIS METHOD B—SUMMARY FOR MODEL YEARS 2018–2029<sup>a</sup>

Model years	Alternative 3 (proposed)	Alternative 4
No-action alternative (baseline)	1a (less dy- namic)	1a (less dy- namic)
Fuel Savings (Billion Gallons) .....	75.8	85.4
Total GHG Reductions (MMT CO <sub>2</sub> eq) .....	1,036.4	1,163.1
Downstream (MMT CO <sub>2</sub> eq) .....	772.6	867.3
Upstream (MMT CO <sub>2</sub> eq) .....	263.8	295.8

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

D. Climate Impacts and Indicators

(1) Climate Change Impacts From GHG Emissions

The impact of GHG emissions on the climate has been reviewed in the 2009 Endangerment and Cause or Contribute Findings for Greenhouse Gases under Section 202(a) of the Clean Air Act, the

2012–2016 light-duty vehicle rulemaking, the 2014–2018 heavy-duty vehicle GHG and Fuel Efficiency rulemaking, and the 2017–2025 light-duty vehicle rulemaking, and the proposed standards for new electricity utility generating units. See 74 FR 66496; 75 FR 25491; 76 FR 57294; 77 FR 62894; 79 FR 1456–1459 (January 8,

2014). This section briefly discusses again some of the climate impact of EPA's proposed actions in context of transportation emissions. NHTSA has analyzed the climate impacts of its specific proposed actions (*i.e.*, excluding EPA's HFC regulatory provisions) as well as reasonable alternative in its DEIS that accompanies

<sup>392</sup> A lifetime of 30 years is assumed in MOVES.

this proposed rule. DOT has considered the potential climate impacts documented in the DEIS as part of the rulemaking process.

Once emitted, GHGs that are the subject of this proposed regulation can remain in the atmosphere for decades to millennia, meaning that (1) their concentrations become well-mixed throughout the global atmosphere regardless of emission origin, and (2) their effects on climate are long lasting. GHG emissions come mainly from the combustion of fossil fuels (coal, oil, and gas), with additional contributions from the clearing of forests, agricultural activities, cement production, and some industrial activities. Transportation activities, in aggregate, were the second largest contributor to total U.S. GHG emissions in 2010 (27 percent of total emissions).<sup>393</sup>

The EPA Administrator relied on thorough and peer-reviewed assessments of climate change science prepared by the Intergovernmental Panel on Climate Change (“IPCC”), the United States Global Change Research Program (“USGCRP”), and the National Research Council of the National Academies (“NRC”) <sup>394</sup> as the primary scientific and technical basis for the Endangerment and Cause or Contribute Findings for Greenhouse Gases Under Section 202(a) of the Clean Air Act (74 FR 66496, December 15, 2009). These assessments comprehensively address the scientific issues the EPA Administrator had to examine, providing her data and information on a wide range of issues pertinent to the Endangerment Finding. These assessments have been rigorously reviewed by the expert community, and also by United States government agencies and scientists, including by EPA itself.

Based on these assessments, the EPA Administrator determined that the emissions from new motor vehicles and engines contributes to elevated concentrations of greenhouse gases, that these greenhouse gases cause warming; that the recent warming has been attributed to the increase in greenhouse gases; and that warming of the climate endangers the public health and welfare of current and future generations. See *Coalition for Responsible Regulation v.*

*EPA*, 684 F. 3d 102, 121 (D.C. Cir. 2012) (upholding all of EPA’s findings and stating “EPA had before it substantial record evidence that anthropogenic emissions of greenhouse gases ‘very likely’ caused warming of the climate over the last several decades. EPA further had evidence of current and future effects of this warming on public health and welfare. Relying again upon substantial scientific evidence, EPA determined that anthropogenically induced climate change threatens both public health and public welfare. It found that extreme weather events, changes in air quality, increases in food- and water-borne pathogens, and increases in temperatures are likely to have adverse health effects. The record also supports EPA’s conclusion that climate change endangers human welfare by creating risk to food production and agriculture, forestry, energy, infrastructure, ecosystems, and wildlife. Substantial evidence further supported EPA’s conclusion that the warming resulting from the greenhouse gas emissions could be expected to create risks to water resources and in general to coastal areas as a result of expected increase in sea level.”)

A number of major peer-reviewed scientific assessments have been released since the administrative record concerning the Endangerment Finding closed following EPA’s 2010 Reconsideration Denial.<sup>395</sup> These assessments include the “Special Report on Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation” <sup>396</sup>, the 2013–14 Fifth Assessment Report (AR5),<sup>397</sup> the 2014 National Climate

Assessment report,<sup>398</sup> the “Ocean Acidification: A National Strategy to Meet the Challenges of a Changing Ocean,” <sup>399</sup> “Report on Climate Stabilization Targets: Emissions, Concentrations, and Impacts over Decades to Millennia,” <sup>400</sup> “National Security Implications for U.S. Naval Forces” (National Security Implications),<sup>401</sup> “Understanding Earth’s Deep Past: Lessons for Our Climate Future,” <sup>402</sup> “Sea Level Rise for the Coasts of California, Oregon, and Washington: Past, Present, and Future,” <sup>403</sup> “Climate and Social Stress: Implications for Security Analysis,” <sup>404</sup> and “Abrupt Impacts of Climate Change” (Abrupt Impacts) assessments.<sup>405</sup>

EPA has reviewed these assessments and finds that in general, the improved understanding of the climate system they present are consistent with the assessments underlying the 2009 Endangerment Finding.

The most recent assessments released were the IPCC AR5 assessments between September 2013 and April 2014, the NRC Abrupt Impacts assessment in December of 2013, and the U.S. National Climate Assessment in May of 2014. The NRC Abrupt Impacts report examines the potential for tipping points, thresholds beyond which major and rapid changes occur in the Earth’s climate system or other systems impacted by the climate. The Abrupt

Panel on Climate Change. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA.

<sup>398</sup> Melillo, Jerry M., Terese (T.C.) Richmond, and Gary W. Yohe, Eds. 2014. Climate Change Impacts in the United States: The Third National Climate Assessment. U.S. Global Change Research Program. Available at <http://nca2014.globalchange.gov>.

<sup>399</sup> National Research Council (NRC). 2010. Ocean Acidification: A National Strategy to Meet the Challenges of a Changing Ocean. National Academies Press. Washington, DC.

<sup>400</sup> National Research Council (NRC). 2011. Climate Stabilization Targets: Emissions, Concentrations, and Impacts over Decades to Millennia. National Academies Press, Washington, DC.

<sup>401</sup> National Research Council (NRC). 2011. National Security Implications of Climate Change for U.S. Naval Forces. National Academies Press. Washington, DC.

<sup>402</sup> National Research Council (NRC). 2012. Sea-Level Rise for the Coasts of California, Oregon, and Washington: Past, Present, and Future. National Academies Press. Washington, DC.

<sup>403</sup> National Research Council (NRC). 2012. Sea-Level Rise for the Coasts of California, Oregon, and Washington: Past, Present, and Future. National Academies Press. Washington, DC.

<sup>404</sup> National Research Council (NRC). 2013. Climate and Social Stress: Implications for Security Analysis. National Academies Press. Washington, DC.

<sup>405</sup> National Research Council (NRC). 2013. Abrupt Impacts of Climate Change: Anticipating Surprises. National Academies Press. Washington, DC.

<sup>393</sup> U.S. EPA (2012) Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990–2010. EPA 430-R-12-001. Available at <http://epa.gov/climatechange/emissions/downloads/12/US-GHG-Inventory-2012-Main-Text.pdf>.

<sup>394</sup> For a complete list of core references from IPCC, USGCRP/CCSP, NRC and others relied upon for development of the TSD for EPA’s Endangerment and Cause or Contribute Findings see section 1(b), specifically, Table 1.1 of the TSD. (Docket EPA-HQ-OAR-2010-0799)

<sup>395</sup> “EPA’s Denial of the Petitions to Reconsider the Endangerment and Cause or Contribute Findings for Greenhouse Gases under Section 202(a) of the Clean Air Act”, 75 FR 49,556 (Aug. 13, 2010) (“Reconsideration Denial”).

<sup>396</sup> Intergovernmental Panel on Climate Change (IPCC). 2012: Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation. A Special Report of Working Groups I and II of the Intergovernmental Panel on Climate Change. Cambridge University Press, Cambridge, UK, and New York, NY, USA.

<sup>397</sup> Intergovernmental Panel on Climate Change (IPCC). 2013. Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, Intergovernmental Panel on Climate Change (IPCC). 2014. Climate Change 2014: Impacts, Adaptation, and Vulnerability. Contribution of Working Group II to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, Intergovernmental Panel on Climate Change (IPCC). 2014. Climate Change 2014: Mitigation of Climate Change. Contribution of Working Group III to the Fifth Assessment Report of the Intergovernmental



Impacts report did find less cause for concern than some previous assessments regarding some abrupt events within the next century such as disruption of the Atlantic Meridional Overturning Circulation (AMOC) and sudden releases of high-latitude methane from hydrates and permafrost, but found that the potential for abrupt changes in ecosystems, weather and climate extremes, and groundwater supplies critical for agriculture now seem more likely, severe, and imminent. The assessment found that some abrupt changes were already underway (Arctic sea ice retreat and increases in extinction risk due to the speed of climate change), but cautioned that even abrupt changes such as the AMOC disruption that are not expected in this century can have severe impacts when they happen.

The IPCC AR5 assessments are also generally consistent with the underlying science supporting the 2009 Endangerment Finding. For example, confidence in attributing recent warming to human causes has increased: The IPCC stated that it is extremely likely (>95 percent confidence) that human influences have been the dominant cause of recent warming. Moreover, the IPCC found that the last 30 years were likely (>66 percent confidence) the warmest 30 year period in the Northern Hemisphere of the past 1400 years, that the rate of ice loss of worldwide glaciers and the Greenland and Antarctic ice sheets has likely increased, that there is medium confidence that the recent summer sea ice retreat in the Arctic is larger than it has been in 1450 years, and that concentrations of carbon dioxide and several other of the major greenhouse gases are higher than they have been in at least 800,000 years. Climate-change induced impacts have been observed in changing precipitation patterns, melting snow and ice, species migration, negative impacts on crops, increased heat and decreased cold mortality, and altered ranges for water-borne illnesses and disease vectors. Additional risks from future changes include death, injury, and disrupted livelihoods in coastal zones and regions vulnerable to inland flooding, food insecurity linked to warming, drought, and flooding, especially for poor populations, reduced access to drinking and irrigation water for those with minimal capital in semi-arid regions, and decreased biodiversity in marine ecosystems, especially in the Arctic and tropics, with implications for coastal livelihoods. The IPCC determined that “[c]ontinued emissions of greenhouse gases will cause further

warming and changes in all components of the climate system. Limiting climate change will require substantial and sustained reductions of greenhouse gases emissions.”

Finally, the recently released National Climate Assessment stated, “Climate change is already affecting the American people in far reaching ways. Certain types of extreme weather events with links to climate change have become more frequent and/or intense, including prolonged periods of heat, heavy downpours, and, in some regions, floods and droughts. In addition, warming is causing sea level to rise and glaciers and Arctic sea ice to melt, and oceans are becoming more acidic as they absorb carbon dioxide. These and other aspects of climate change are disrupting people’s lives and damaging some sectors of our economy.”

Assessments from these bodies represent the current state of knowledge, comprehensively cover and synthesize thousands of individual studies to obtain the majority conclusions from the body of scientific literature and undergo a rigorous and exacting standard of review by the peer expert community and U.S. government.

Based on modeling analysis performed by the agencies, reductions in CO<sub>2</sub> and other GHG emissions associated with these proposed rules will affect future climate change. Since GHGs are well-mixed in the atmosphere and have long atmospheric lifetimes, changes in GHG emissions will affect atmospheric concentrations of greenhouse gases and future climate for decades to millennia, depending on the gas. This section provides estimates of the projected change in atmospheric CO<sub>2</sub> concentrations based on the emission reductions estimated for these proposed rules, compared to the reference case. In addition, this section analyzes the response to the changes in GHG concentrations of the following climate-related variables: Global mean temperature, sea level rise, and ocean pH.

#### (2) Projected Change in Atmospheric CO<sub>2</sub> Concentrations, Global Mean Surface Temperature and Sea Level Rise

To assess the impact of the emissions reductions from the proposed rules, EPA estimated changes in projected atmospheric CO<sub>2</sub> concentrations, global mean surface temperature and sea-level rise to 2100 using the GCAM (Global Change Assessment Model, formerly MiniCAM), integrated assessment model<sup>406</sup> coupled with the MAGICC

<sup>406</sup> GCAM is a long-term, global integrated assessment model of energy, economy, agriculture

(Model for the Assessment of Greenhouse-gas Induced Climate Change) simple climate model.<sup>407</sup> GCAM was used to create the globally and temporally consistent set of climate relevant emissions required for running MAGICC. MAGICC was then used to estimate the projected change in relevant climate variables over time. Given the magnitude of the estimated emissions reductions associated with these rules, a simple climate model such as MAGICC is appropriate for estimating the atmospheric and climate response.

The analysis projects that the proposed rules would reduce atmospheric concentrations of CO<sub>2</sub>, global climate warming, ocean acidification, and sea level rise relative to the reference case. Although the projected reductions and improvements are small in comparison to the total projected climate change, they are quantifiable, directionally consistent, and will contribute to reducing the risks associated with climate change. Climate change is a global phenomenon and EPA recognizes that this one national action alone will not prevent it; EPA notes this would be true for any given GHG mitigation action when taken alone or when considered in isolation. EPA also notes that a substantial portion of CO<sub>2</sub> emitted into the atmosphere is not removed by natural processes for millennia, and therefore each unit of CO<sub>2</sub> not emitted into the atmosphere due to this rules avoids essentially permanent climate change on centennial time scales.

EPA determines that the projected reductions in atmospheric CO<sub>2</sub>, global mean temperature, sea level rise, and ocean pH are meaningful in the context of this action. The results of the analysis, summarized in Table VII–37, demonstrate that relative to the

and land use that considers the sources of emissions of a suite of greenhouse gases (GHG’s), emitted in 14 globally disaggregated regions, the fate of emissions to the atmosphere, and the consequences of changing concentrations of greenhouse related gases for climate change. GCAM begins with a representation of demographic and economic developments in each region and combines these with assumptions about technology development to describe an internally consistent representation of energy, agriculture, land-use, and economic developments that in turn shape global emissions.

<sup>407</sup> MAGICC consists of a suite of coupled gas-cycle, climate and ice-melt models integrated into a single framework. The framework allows the user to determine changes in greenhouse-gas concentrations, global-mean surface air temperature and sea-level resulting from anthropogenic emissions of carbon dioxide (CO<sub>2</sub>), methane (CH<sub>4</sub>), nitrous oxide (N<sub>2</sub>O), reactive gases (CO, NO<sub>x</sub>, VOCs), the halocarbons (e.g. HCFCs, HFCs, PFCs) and sulfur dioxide (SO<sub>2</sub>). MAGICC emulates the global-mean temperature responses of more sophisticated coupled Atmosphere/Ocean General Circulation Models (AOGCMs) with high accuracy.

reference case, by 2100 projected atmospheric CO<sub>2</sub> concentrations are estimated to be reduced by 1.1 to 1.2 part per million by volume (ppmv),

global mean temperature is estimated to be reduced by 0.0026 to 0.0065 °C, and sea-level rise is projected to be reduced by approximately 0.023 to 0.057 cm,

based on a range of climate sensitivities (described below). Details about this modeling analysis can be found in the draft RIA Chapter 6.3.

**TABLE VII–37—IMPACT OF GHG EMISSIONS REDUCTIONS ON PROJECTED CHANGES IN GLOBAL CLIMATE ASSOCIATED WITH PROPOSED PHASE 2 STANDARDS FOR MY 2018–2024**

[Based on a range of climate sensitivities from 1.5–6 °C]

Variable	Units	Year	Projected change
Atmospheric CO <sub>2</sub> CONCENTRATION .....	ppmv .....	2100	–1.1 to –1.2
Global Mean Surface Temperature .....	°C .....	2100	–0.0026 to –0.0065
Sea Level Rise .....	cm .....	2100	–0.023 to –0.057
Ocean pH .....	pH units .....	2100	+0.0006 <sup>a</sup>

**Note:**

<sup>a</sup> The value for projected change in ocean pH is based on a climate sensitivity of 3.0.

The projected reductions are small relative to the change in temperature (1.8–4.8 °C), CO<sub>2</sub> concentration (404 to 470 ppm), sea level rise (23–56 cm), and ocean acidity (–0.30 pH units) from 1990 to 2100 from the MAGICC simulations for the GCAM reference case. However, this is to be expected given the magnitude of emissions reductions expected from the program in the context of global emissions. Moreover, these effects are occurring everywhere around the globe, so benefits that appear to be marginal for any one location, such as a reduction in sea level rise of half a millimeter, can be sizable when the effects are summed along thousands of miles of coastline. This uncertainty range does not include the effects of uncertainty in future emissions. It should also be noted that the calculations in MAGICC do not include the possible effects of accelerated ice flow in Greenland and/or Antarctica: Estimates of sea level rise from the recent NRC, IPCC, and NCA assessments range from 26 cm to 2 meters depending on the emissions scenario, the processes included, and the likelihood range assessed; inclusion of these effects would lead to correspondingly larger benefits of mitigation. Further discussion of EPA's modeling analysis is found in the RIA, Chapter 6.3.

Based on the projected atmospheric CO<sub>2</sub> concentration reductions resulting from these proposed rules, EPA calculates an increase in ocean pH of 0.0006 pH units in 2100 relative to the baseline case (this is a reduction in the expected acidification of the ocean of a decrease of 0.3 pH units from 1990 to 2100 in the baseline case). Thus, this analysis indicates the projected decrease in atmospheric CO<sub>2</sub> concentrations from the proposed Phase 2 standards would result in an increase in ocean pH (*i.e.*, a reduction in the expected acidification of the ocean in the reference case). A

more detailed discussion of the modeling analysis associated with ocean pH is provided in the draft RIA, Chapter 6.3.

The 2011 NRC assessment on “Climate Stabilization Targets: Emissions, Concentrations, and Impacts over Decades to Millennia” determined how a number of climate impacts—such as heaviest daily rainfalls, crop yields, and Arctic sea ice extent—would change with a temperature change of 1 degree Celsius (C) of warming. These relationships of impacts with temperature change could be combined with the calculated reductions in warming in Table VII–37 to estimate changes in these impacts associated with this proposed rulemaking.

As a substantial portion of CO<sub>2</sub> emitted into the atmosphere is not removed by natural processes for millennia, each unit of CO<sub>2</sub> not emitted into the atmosphere avoids some degree of effectively permanent climate change. Therefore, reductions in emissions in the near-term are important in determining climate impacts experienced not just over the next decades but over thousands of years.<sup>408</sup> Though the magnitude of the avoided climate change projected here in isolation is small in comparison to the total projected changes, these reductions represent a reduction in the adverse risks associated with climate change (though these risks were not formally estimated for this action) across a range of equilibrium climate sensitivities.

EPA's analysis of this proposed rule's impact on global climate conditions is intended to quantify these potential reductions using the best available science. EPA's modeling results show consistent reductions relative to the

baseline case in changes of CO<sub>2</sub> concentration, temperature, sea-level rise, and ocean pH over the next century.

### **VIII. How will this proposed action impact non-GHG emissions and their associated effects?**

The proposed heavy-duty vehicle standards are expected to influence the emissions of criteria air pollutants and several air toxics. This section describes the projected impacts of the proposed rules and Alternative 4 on non-GHG emissions and air quality, and the health and environmental effects associated with these pollutants. NHTSA further analyzes these projected health and environmental effects resulting from its proposed rules and reasonable alternatives in Chapter 4 of its DEIS.

#### *A. Emissions Inventory Impacts*

As described in Section VII, the agencies conducted coordinated and complementary analyses for these rules by employing both DOT's CAFE model and EPA's MOVES model, relative to different reference cases (*i.e.*, different baselines). The agencies used EPA's MOVES model to estimate the non-GHG impacts for tractor-trailers (including the engine that powers the vehicle), and vocational vehicles (including the engine that powers the vehicle). For heavy-duty pickups and vans, the agencies performed complementary analyses using the CAFE model (“Method A”) and the MOVES model (“Method B”) to estimate non-GHG emissions from these vehicles. For both methods, the agencies analyzed the impact of the proposed rules, relative to two different reference cases—less dynamic and more dynamic. The less dynamic baseline projects very little improvement in new vehicles in the absence of new Phase 2 standards. In contrast, the more dynamic baseline

<sup>408</sup> National Research Council (NRC) (2011). Climate Stabilization Targets: Emissions, Concentrations, and Impacts over Decades to Millennia. National Academy Press, Washington, DC. (Docket EPA–HQ–OAR–2010–0799)

projects more improvements in vehicle fuel efficiency. The agencies considered both reference cases. The results for all of the regulatory alternatives relative to both reference cases, derived via the same methodologies discussed in Section VII of the Preamble, are presented in Section X of the Preamble.

For brevity, a subset of these analyses are presented in this section and the reader is referred to both the RIA Chapter 11 and NHTSA's DEIS Chapters 3 and 5 for complete sets of these analyses. In this section, Method A is presented for both the proposed standards (*i.e.*, Alternative 3—the agencies' preferred alternative) and for the standards the agencies considered in Alternative 4, relative to both the more dynamic baseline (Alternative 1b) and the less dynamic baseline (Alternative 1a). Method B is presented also for the proposed standards and Alternative 4, but relative only to the less dynamic baseline. The agencies' intention for presenting both of these complementary and coordinated analyses is to offer interested readers the opportunity to compare the regulatory alternatives considered for Phase 2 in both the context of our HD Phase 1 analytical

approaches and our light-duty vehicle analytical approaches. The agencies view these analyses as corroborative and reinforcing: Both support agencies' conclusion that the proposed standards are appropriate and at the maximum feasible levels.

The following subsections summarize two slightly different analyses of the annual non-GHG emissions reductions expected from the proposed standards and Alternative 4. Section VIII. A. (1) presents the impacts of the proposed rules and Alternative 4 on non-GHG emissions using the analytical Method A, relative to two different reference cases—less dynamic and more dynamic. Section VIII. A. (2) presents the impacts of the proposed standards and Alternative 4, relative to the less dynamic reference case only, using the MOVES model for all heavy-duty vehicle categories.

(1) Impacts of the Proposed Rules and Alternative 4 Using Analysis Method A

(a) Calendar Year Analysis

(i) Upstream Impacts of the Proposed Program and Alternative 4

Increasing efficiency in heavy-duty vehicles would result in reduced fuel

demand, and therefore, reductions in the emissions associated with all processes involved in getting petroleum to the pump. Both Method A and Method B project these impacts for fuel consumed by vocational vehicles and combination tractor-trailers, using the same methods. See Section VIII.A.(2) (a)(i) for the description of this methodology. To project these impacts for fuel consumed by HD pickups and vans, Method A used similar calculations and inputs applicable to the CAFE model, as discussed above in Section VI. More information on the development of the emission factors used in this analysis can be found in Chapter 5 of the draft RIA.

The following four tables summarize the projected upstream emission impacts of the preferred alternative and Alternative 4 on both criteria pollutants and air toxics from the heavy-duty sector, relative to Alternative 1b (more dynamic baseline conditions under the No-Action Alternative) and Alternative 1a (less dynamic baseline conditions under the No-Action Alternative).

TABLE VIII-1—ANNUAL UPSTREAM IMPACTS ON CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% Reduction	US short tons	% Reduction	US short tons	% Reduction
1,3-Butadiene .....	-1	-5	-3	-14	-5	-17
Acetaldehyde .....	-3	-3	-10	-11	-15	-13
Acrolein .....	0	-4	-1	-12	-2	-15
Benzene .....	-21	-4	-74	-13	-104	-15
CO .....	-3,798	-5	-12,087	-14	-17,120	-17
Formaldehyde .....	-19	-5	-59	-14	-84	-17
NO <sub>x</sub> .....	-9,472	-5	-30,333	-14	-42,839	-17
PM <sub>2.5</sub> .....	-1,019	-5	-3,257	-14	-4,609	-17
SO <sub>x</sub> .....	-5,983	-5	-19,190	-14	-27,074	-17
VOC .....	-3,066	-4	-11,029	-13	-15,386	-15

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VIII-2—ANNUAL UPSTREAM IMPACTS ON CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% Reduction	US short tons	% Reduction	US short tons	% Reduction
1,3-Butadiene .....	-1	-6	-3	-15	-5	-17
Acetaldehyde .....	-4	-5	-11	-12	-15	-14
Acrolein .....	-1	-5	-1	-13	-2	-15
Benzene .....	-28	-5	-78	-13	-105	-16
CO .....	-4,679	-6	-12,640	-15	-17,263	-17
Formaldehyde .....	-23	-6	-62	-15	-85	-17
NO <sub>x</sub> .....	-11,708	-6	-31,769	-15	-43,263	-17
PM <sub>2.5</sub> .....	-1,259	-6	-3,408	-15	-4,649	-17
SO <sub>x</sub> .....	-7,402	-6	-20,107	-15	-27,356	-17

TABLE VIII-2—ANNUAL UPSTREAM IMPACTS ON CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>—Continued

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% Reduction	US short tons	% Reduction	US short tons	% Reduction
VOC .....	-4,081	-5	-11,717	-13	-15,645	-15

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VIII-3—ANNUAL UPSTREAM IMPACTS ON CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1a USING ANALYSIS METHOD A<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% Reduction	US short tons	% Reduction	US short tons	% Reduction
1,3-Butadiene .....	-1	-5	-4	-15	-5	-18
Acetaldehyde .....	-3	-3	-11	-12	-16	-14
Acrolein .....	0	-4	-1	-13	-2	-15
Benzene .....	-22	-4	-80	-14	-113	-16
CO .....	-3,911	-5	-13,153	-15	-18,794	-18
Formaldehyde .....	-19	-5	-65	-15	-92	-18
NO <sub>x</sub> .....	-9,787	-5	-33,021	-15	-47,028	-18
PM <sub>2.5</sub> .....	-1,051	-5	-3,545	-15	-5,058	-18
SO <sub>x</sub> .....	-6,189	-5	-20,896	-15	-29,726	-18
VOC .....	-3,193	-4	-11,848	-13	-16,625	-16

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VIII-4—ANNUAL UPSTREAM IMPACTS ON CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1a USING ANALYSIS METHOD A<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% Reduction	US short tons	% Reduction	US short tons	% Reduction
1,3-Butadiene .....	-1	-6	-4	-16	-5	-18
Acetaldehyde .....	-4	-5	-12	-12	-16	-14
Acrolein .....	-1	-5	-1	-13	-2	-16
Benzene .....	-29	-5	-84	-14	-114	-17
CO .....	-4,816	-6	-13,720	-16	-18,945	-18
Formaldehyde .....	-24	-6	-67	-16	-93	-18
NO <sub>x</sub> .....	-12,098	-6	-34,501	-16	-47,477	-18
PM <sub>2.5</sub> .....	-1,298	-6	-3,700	-16	-5,101	-18
SO <sub>x</sub> .....	-7,658	-6	-21,843	-16	-30,024	-18
VOC .....	-4,251	-5	-12,541	-14	-16,870	-16

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

## (ii) Downstream Impacts of the Proposed Program and Alternative 4

For vocational vehicles and tractor-trailers, the agencies used the MOVES model to determine non-GHG emissions inventories. The improvements in engine efficiency and road load, the

increased use of APUs, and VMT rebound were included in the MOVES analysis. For the analysis presented in this section, the DOT CAFE model was used for HD pickups and vans. Further information about DOT's CAFE model is available in Section VI.C and Chapter 10

of the draft RIA. The following four tables summarize the projected downstream emission impacts of the preferred alternative and Alternative 4 on both criteria pollutants and air toxics from the heavy-duty sector, relative to Alternative 1b and Alternative 1a.

TABLE VIII-5—ANNUAL DOWNSTREAM IMPACTS ON CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% Reduction	US short tons	% Reduction	US short tons	% Reduction
1,3-Butadiene .....	-8	-3	-21	-12	-30	-16
Acetaldehyde .....	-669	-10	-1,882	-31	-2,667	-36
Acrolein .....	-97	-10	-272	-31	-385	-37
Benzene .....	-123	-6	-347	-19	-490	-24
CO .....	-26,485	-3	-75,199	-8	-106,756	-9
Formaldehyde .....	-2,100	-12	-5,910	-32	-8,376	-37
NO <sub>x</sub> .....	-92,444	-7	-260,949	-28	-370,663	-34
PM <sub>2.5</sub> <sup>b</sup> .....	643	2	1,722	8	2,410	10
SO <sub>x</sub> .....	-229	-4	-715	-13	-1,026	-15
VOC .....	-13,161	-6	-38,051	-21	-54,139	-26

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Positive number means emissions would increase from reference to control case. PM<sub>2.5</sub> from tire wear and brake wear are included.

TABLE VIII-6—ANNUAL DOWNSTREAM IMPACTS ON CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% Reduction	US short tons	% Reduction	US short tons	% Reduction
1,3-Butadiene .....	-8	-2	-21	-12	-30	-16
Acetaldehyde .....	-669	-10	-1,882	-31	-2,667	-36
Acrolein .....	-97	-10	-271	-31	-385	-37
Benzene .....	-124	-6	-347	-19	-490	-24
CO .....	-26,705	-3	-75,407	-8	-106,874	-9
Formaldehyde .....	-2,100	-12	-5,908	-32	-8,375	-37
NO <sub>x</sub> .....	-93,984	-8	-262,150	-28	-370,704	-34
PM <sub>2.5</sub> <sup>b</sup> .....	619	2	1,705	8	2,412	10
SO <sub>x</sub> .....	-280	-5	-742	-13	-1,029	-15
VOC .....	-13,925	-7	-38,472	-22	-54,150	-26

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Positive number means emissions would increase from reference to control case. PM<sub>2.5</sub> from tire wear and brake wear are included.

TABLE VIII-7—ANNUAL DOWNSTREAM IMPACTS ON CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1a USING ANALYSIS METHOD A<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% Reduction	US short tons	% Reduction	US short tons	% Reduction
1,3-Butadiene .....	-8	-3	-21	-12	-30	-16
Acetaldehyde .....	-669	-10	-1,880	-31	-2,664	-36
Acrolein .....	-97	-10	-271	-31	-384	-37
Benzene .....	-123	-6	-346	-19	-490	-24
CO .....	-26,576	-3	-75,571	-8	-107,287	-9
Formaldehyde .....	-2,100	-12	-5,904	-32	-8,369	-37
NO <sub>x</sub> .....	-93,197	-8	-266,890	-29	-380,303	-35
PM <sub>2.5</sub> <sup>b</sup> .....	632	2	1,635	8	2,267	9
SO <sub>x</sub> .....	-232	-4	-776	-14	-1,125	-16
VOC .....	-13,210	-6	-38,964	-22	-55,628	-26

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Positive number means emissions would increase from reference to control case. PM<sub>2.5</sub> from tire wear and brake wear are included.

TABLE VIII-8—ANNUAL DOWNSTREAM IMPACTS ON CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1a USING ANALYSIS METHOD A<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% Reduction	US short tons	% Reduction	US short tons	% Reduction
1,3-Butadiene .....	-8	-2	-21	-12	-29	-16
Acetaldehyde .....	-668	-10	-1,880	-31	-2,664	-36
Acrolein .....	-97	-10	-271	-31	-384	-37
Benzene .....	-124	-6	-346	-19	-489	-24
CO .....	-26,821	-3	-75,795	-8	-107,414	-9
Formaldehyde .....	-2,099	-12	-5,902	-32	-8,367	-37
NO <sub>x</sub> .....	-94,724	-8	-268,075	-29	-380,328	-35
PM <sub>2.5</sub> <sup>b</sup> .....	609	2	1,618	8	2,269	9
SO <sub>x</sub> .....	-282	-5	-803	-14	-1,127	-16
VOC .....	-13,971	-7	-39,383	-22	-55,638	-26

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Positive number means emissions would increase from reference to control case. PM<sub>2.5</sub> from tire wear and brake wear are included.

(iii) Total Impacts of the Proposed Program and Alternative 4

impacts of the preferred alternative and Alternative 4 on both criteria pollutants and air toxics from the heavy-duty

sector, relative to Alternative 1b and Alternative 1a.

The following four tables summarize the projected upstream emission

TABLE VIII-9—ANNUAL TOTAL IMPACTS (UPSTREAM AND DOWNSTREAM) OF CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% reduction	US short tons	% reduction	US short tons	% reduction
1,3-Butadiene .....	-9	-3	-25	-13	-34	-16
Acetaldehyde .....	-672	-10	-1,893	-30	-2,682	-36
Acrolein .....	-97	-10	-273	-31	-387	-37
Benzene .....	-145	-5	-421	-18	-595	-22
CO .....	-30,282	-3	-87,286	-8	-123,876	-10
Formaldehyde .....	-2,119	-11	-5,969	-32	-8,460	-37
NO <sub>x</sub> .....	-101,916	-7	-291,282	-26	-413,501	-31
PM <sub>2.5</sub> .....	-376	-1	-1,535	-3	-2,199	-4
SO <sub>x</sub> .....	-6,213	-5	-19,905	-14	-28,101	-17
VOC .....	-16,227	-6	-49,080	-18	-69,525	-22

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VIII-10—ANNUAL TOTAL IMPACTS (UPSTREAM AND DOWNSTREAM) OF CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% reduction	US short tons	% reduction	US short tons	% reduction
1,3-Butadiene .....	-9	-3	-25	-13	-34	-16
Acetaldehyde .....	-673	-10	-1,893	-30	-2,682	-36
Acrolein .....	-97	-10	-273	-31	-387	-37
Benzene .....	-152	-6	-426	-18	-595	-22
CO .....	-31,383	-3	-88,047	-8	-124,137	-10
Formaldehyde .....	-2,123	-11	-5,970	-32	-8,460	-37
NO <sub>x</sub> .....	-105,693	-7	-293,918	-26	-413,967	-31
PM <sub>2.5</sub> .....	-639	-1	-1,703	-4	-2,237	-4
SO <sub>x</sub> .....	-7,682	-6	-20,849	-15	-28,385	-17

TABLE VIII-10—ANNUAL TOTAL IMPACTS (UPSTREAM AND DOWNSTREAM) OF CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1b USING ANALYSIS METHOD A<sup>a</sup>—Continued

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% reduction	US short tons	% reduction	US short tons	% reduction
VOC .....	– 18,006	– 6	– 50,189	– 19	– 69,796	– 22

**Note:**

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VIII-11—ANNUAL TOTAL IMPACTS (UPSTREAM AND DOWNSTREAM) OF CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1a USING ANALYSIS METHOD A<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% reduction	US short tons	% reduction	US short tons	% reduction
1,3-Butadiene .....	– 9	– 3	– 25	– 13	– 35	– 16
Acetaldehyde .....	– 672	– 10	– 1,891	– 30	– 2,680	– 36
Acrolein .....	– 97	– 10	– 273	– 31	– 386	– 37
Benzene .....	– 145	– 5	– 425	– 18	– 603	– 22
CO .....	– 30,487	– 3	– 88,724	– 8	– 126,081	– 10
Formaldehyde .....	– 2,119	– 11	– 5,969	– 32	– 8,461	– 37
NO <sub>x</sub> .....	– 102,983	– 7	– 299,911	– 26	– 427,332	– 32
PM <sub>2.5</sub> .....	– 419	– 1	– 1,910	– 4	– 2,791	– 5
SO <sub>x</sub> .....	– 6,421	– 5	– 21,672	– 15	– 30,850	– 18
VOC .....	– 16,403	– 6	– 50,812	– 19	– 72,253	– 23

**Note:**

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VIII-12—ANNUAL TOTAL IMPACTS (UPSTREAM AND DOWNSTREAM) OF CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1a USING ANALYSIS METHOD A<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% reduction	US short tons	% reduction	US short tons	% reduction
1,3-Butadiene .....	– 9	– 3	– 25	– 13	– 35	– 16
Acetaldehyde .....	– 672	– 10	– 1,891	– 30	– 2,679	– 36
Acrolein .....	– 97	– 10	– 273	– 31	– 386	– 37
Benzene .....	– 153	– 6	– 430	– 18	– 603	– 22
CO .....	– 31,637	– 3	– 89,514	– 8	– 126,360	– 10
Formaldehyde .....	– 2,123	– 11	– 5,969	– 32	– 8,460	– 37
NO <sub>x</sub> .....	– 106,822	– 7	– 302,575	– 26	– 427,805	– 32
PM <sub>2.5</sub> .....	– 689	– 1	– 2,082	– 5	– 2,833	– 5
SO <sub>x</sub> .....	– 7,941	– 6	– 22,646	– 16	– 31,151	– 18
VOC .....	– 18,222	– 6	– 51,924	– 19	– 72,509	– 23

**Note:**

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

## (b) Model Year Lifetime Analysis

TABLE VIII-13—LIFETIME NON-GHG REDUCTIONS USING ANALYSIS METHOD A—SUMMARY FOR MODEL YEARS 2018–2029 (US SHORT TONS)<sup>a</sup>

No-action alternative (baseline)	Alternative 3 (proposed)		Alternative 4	
	1b (more dynamic)	1a (less dynamic)	1b (more dynamic)	1a (less dynamic)
NO <sub>x</sub> .....	2,359,548	2,409,738	2,420,931	2,472,021
Downstream .....	2,103,163	2,137,232	2,130,659	2,164,458

TABLE VIII–13—LIFETIME NON-GHG REDUCTIONS USING ANALYSIS METHOD A—SUMMARY FOR MODEL YEARS 2018–2029 (US SHORT TONS) <sup>a</sup>—Continued

No-action alternative (baseline)	Alternative 3 (proposed)		Alternative 4	
	1b (more dynamic)	1a (less dynamic)	1b (more dynamic)	1a (less dynamic)
Upstream .....	256,385	272,506	290,272	307,563
PM <sub>2.5</sub> .....	13,496	15,706	17,524	19,839
Downstream <sup>b</sup> .....	– 14,051	– 13,546	– 13,649	– 13,153
Upstream .....	27,547	29,252	31,173	32,992
SO <sub>x</sub> .....	167,415	177,948	189,670	200,992
Downstream .....	5,326	5,562	6,079	6,311
Upstream .....	162,089	172,386	183,591	194,681

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Negative number means emissions would increase from reference to control case. PM<sub>2.5</sub> from tire wear and brake wear are included.

(2) Impacts of the Proposed Rules and Alternative 4 using Analysis Method B

(a) Calendar Year Analysis

(i) Upstream Impacts of the Proposed Program and Alternative 4

Increasing efficiency in heavy-duty vehicles would result in reduced fuel demand, and therefore, reductions in the emissions associated with all processes involved in getting petroleum to the pump. To project these impacts, Method B estimated the impact of reduced petroleum volumes on the extraction and transportation of crude oil as well as the production and distribution of finished gasoline and diesel. For the purpose of assessing domestic-only emission reductions, it

was necessary to estimate the fraction of fuel savings attributable to domestic finished gasoline and diesel, and of this fuel, what fraction is produced from domestic crude. Method B estimated the emissions associated with production and distribution of gasoline and diesel from crude oil based on emission factors in the “Greenhouse Gases, Regulated Emissions, and Energy used in Transportation” model (GREET) developed by DOE’s Argonne National Laboratory. In some cases, the GREET values were modified or updated by the agencies to be consistent with the National Emission Inventory (NEI) and emission factors from MOVES. Method B estimated the projected corresponding changes in upstream emissions using

the same tools originally created for the Renewable Fuel Standard 2 (RFS2) rulemaking analysis,<sup>409</sup> used in the LD GHG rulemakings,<sup>410</sup> HD GHG Phase 1,<sup>411</sup> and updated for the current analysis. More information on the development of the emission factors used in this analysis can be found in Chapter 5 of the draft RIA.

Table VIII–14 and Table VIII–15 summarizes the projected upstream emission impacts of the Preferred Alternative and Alternative 4 on both criteria pollutants and air toxics from the heavy-duty sector, relative to Alternative 1a. The comparable estimates relative to Alternative 1b are presented in Section VIII. A. (1).

TABLE VIII–14—ANNUAL UPSTREAM IMPACTS ON CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1a USING ANALYSIS METHOD B <sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% Reduction	US short tons	% Reduction	US short tons	% Reduction
1,3-Butadiene .....	– 1	– 5.0	– 4	– 15.3	– 5	– 18.4
Acetaldehyde .....	– 4	– 3.0	– 18	– 11.9	– 26	– 14.6
Acrolein .....	– 0.5	– 3.4	– 2	– 12.7	– 3	– 15.5
Benzene .....	– 24	– 3.8	– 92	– 13.4	– 132	– 16.3
CO .....	– 3,798	– 4.9	– 13,001	– 15.3	– 18,772	– 18.4
Formaldehyde .....	– 19	– 4.7	– 67	– 14.9	– 98	– 18.0
NO <sub>x</sub> .....	– 9,282	– 4.9	– 31,782	– 15.3	– 45,888	– 18.4
PM <sub>2.5</sub> .....	– 1,020	– 4.9	– 3,514	– 15.2	– 5,072	– 18.2
SO <sub>x</sub> .....	– 5,817	– 4.9	– 19,902	– 15.3	– 28,736	– 18.4
VOC .....	– 3,283	– 3.7	– 12,724	– 13.2	– 18,214	– 16.1

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>409</sup> U.S. EPA. Draft Regulatory Impact Analysis: Changes to Renewable Fuel Standard Program. Chapters 2 and 3. May 26, 2009. Docket ID: EPA–HQ–OAR–2009–0472–0119.

<sup>410</sup> 2017 and Later Model Year Light-Duty Vehicle Greenhouse Gas Emissions and Corporate Average Fuel Economy Standards (77 FR 62623, October 15, 2012).

<sup>411</sup> Greenhouse Gas Emission Standards and Fuel Efficiency Standards for Medium- and Heavy-Duty Engines and Vehicles (76 FR 57106, September 15, 2011).



TABLE VIII-15—ANNUAL UPSTREAM IMPACTS ON CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1a USING ANALYSIS METHOD B<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% Reduction	US short tons	% Reduction	US short tons	% Reduction
1,3-Butadiene .....	-1	-6.1	-4	-15.9	-5	-18.4
Acetaldehyde .....	-6	-4.3	-20	-12.6	-26	-14.7
Acrolein .....	-1	-4.7	-2	-13.3	-3	-15.5
Benzene .....	-32	-5.0	-97	-14.0	-133	-16.3
CO .....	-4,661	-6.1	-13,485	-15.9	-18,812	-18.4
Formaldehyde .....	-24	-5.9	-70	-15.5	-97	-18.0
NO <sub>x</sub> .....	-11,393	-6.1	-32,965	-15.9	-45,986	-18.4
PM <sub>2.5</sub> .....	-1,256	-6.0	-3,647	-15.7	-5,083	-18.3
SO <sub>x</sub> .....	-7,137	-6.1	-20,641	-15.9	-28,797	-18.4
VOC .....	-4,342	-4.9	-13,326	-13.8	-18,273	-16.1

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

## (ii) Downstream Impacts of the Proposed Program and Alternative 4

Both the proposed program and Alternative 4 would impact the downstream emissions of non-GHG pollutants. These pollutants include oxides of nitrogen (NO<sub>x</sub>), oxides of sulfur (SO<sub>x</sub>), volatile organic compounds (VOC), carbon monoxide (CO), fine particulate matter (PM<sub>2.5</sub>), and air toxics. The agencies are expecting reductions in downstream emissions of NO<sub>x</sub>, VOC, SO<sub>x</sub>, CO, and air toxics. Much of these estimated net reductions are a result of the agencies' anticipation of increased use of auxiliary power units (APUs) in combination tractors during extended idling; APUs emit these pollutants at a lower rate than on-road engines during extended idle operation, with the exception of PM<sub>2.5</sub>. Additional reductions in tailpipe emissions of NO<sub>x</sub> and CO and refueling

emissions of VOC would be achieved through improvements in engine efficiency and reduced road load (improved aerodynamics and tire rolling resistance), which reduces the amount of work required to travel a given distance and increases fuel economy. For vehicle types not affected by road load improvements, such as HD pickups and vans,<sup>412</sup> non-GHG emissions would increase very slightly due to VMT rebound. In addition, brake wear and tire wear emissions of PM<sub>2.5</sub> would also increase very slightly due to VMT rebound. The agencies estimate that downstream emissions of SO<sub>x</sub> would be reduced, because they are roughly proportional to fuel consumption. Alternative 4 would have directionally similar effects as the preferred alternative.

For vocational vehicles and tractor-trailers, agencies used MOVES to

determine non-GHG emissions impacts of the proposed rules and Alternative 4, relative to the less dynamic baseline (Alternative 1a). The improvements in engine efficiency and road load, the increased use of APUs, and VMT rebound were included in the MOVES analysis. For this analysis, Method B also used the MOVES model for HD pickups and vans. (Note that for the comparable analysis as described in Section VIII. A. (1), Method A used DOT's CAFE model). Further information about the modeling using DOT's CAFE and MOVES model is available in Section VII and Chapter 5 of the draft RIA.

The downstream criteria pollutant and air toxics impacts of the Preferred Alternative and Alternative 4, relative to Alternative 1a, are presented in Table VIII-16 and Table VIII-17, respectively.

TABLE VIII-16—ANNUAL DOWNSTREAM IMPACTS ON CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE VS. ALT 1a USING ANALYSIS METHOD B<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% Reduction	US short tons	% Reduction	US short tons	% Reduction
1,3-Butadiene .....	-8	-2.6	-22	-15.1	-31	-19.6
Acetaldehyde .....	-670	-10.3	-1,884	-31.0	-2,671	-36.5
Acrolein .....	-97	-9.9	-272	-31.6	-385	-37.3
Benzene .....	-125	-5.9	-353	-21.0	-501	-25.7
CO .....	-25,824	-1.7	-72,960	-6.0	-103,887	-7.6
Formaldehyde .....	-2,102	-11.5	-5,911	-32.1	-8,379	-37.5
NO <sub>x</sub> .....	-93,220	-7.5	-267,125	-29.1	-380,721	-35.2
PM <sub>2.5</sub> <sup>b</sup> .....	634	1.6	1,631	7.6	2,257	9.1
SO <sub>x</sub> .....	-254	-4.8	-876	-15.0	-1,264	-18.1
VOC .....	-13,440	-6.4	-40,148	-21.7	-57,308	-26.1

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Positive number means emissions would increase from reference to control case. PM<sub>2.5</sub> from tire wear and brake wear are included.

<sup>412</sup> HD pickups and vans are subject to gram per mile (distance) emission standards, as opposed to

larger heavy-duty vehicles which are certified to a gram per brake horsepower (work) standard.

TABLE VIII-17—ANNUAL DOWNSTREAM IMPACTS ON CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY – DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 VS. ALT 1a USING ANALYSIS METHOD B<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% Reduction	US short tons	% Reduction	US short tons	% Reduction
1,3-Butadiene .....	– 8	– 2.6	– 22	– 15.1	– 31	– 19.6
Acetaldehyde .....	– 670	– 10.3	– 1,884	– 31.0	– 2,671	– 36.5
Acrolein .....	– 97	– 9.9	– 272	– 31.6	– 385	– 37.3
Benzene .....	– 126	– 5.9	– 354	– 21.0	– 501	– 25.7
CO .....	– 25,919	– 1.7	– 73,041	– 6.0	– 103,891	– 7.6
Formaldehyde .....	– 2,101	– 11.5	– 5,910	– 32.1	– 8,378	– 37.5
NO <sub>x</sub> .....	– 94,787	– 7.6	– 268,373	– 29.2	– 380,810	– 35.2
PM <sub>2.5</sub> <sup>b</sup> .....	610	1.5	1,611	7.5	2,256	9.1
SO <sub>x</sub> .....	– 313	– 5.9	– 909	– 15.6	– 1,267	– 18.1
VOC .....	– 14,310	– 6.8	– 40,640	– 22.0	– 57,348	– 26.1

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Positive number means emissions would increase from reference to control case. PM<sub>2.5</sub> from tire wear and brake wear are included.

As shown in Table VIII-16, a net increase in downstream PM<sub>2.5</sub> emissions is expected. Although the improvements in engine efficiency and road load are expected to reduce tailpipe emissions of PM<sub>2.5</sub>, the projected increased use<sup>413</sup> of APUs would lead to higher PM<sub>2.5</sub> emissions that more than offset the reductions from the tailpipe, since

engines powering APUs are currently required to meet less stringent PM standards than on-road engines. Therefore, EPA conducted an evaluation of a program that would reduce the unintended consequence of increase in PM<sub>2.5</sub> emissions from increased APU use by fitting the APU with a diesel particulate filter or having the APU

exhaust plumbed into the vehicle's exhaust system upstream of the particulate matter aftertreatment device. Such program requiring additional PM<sub>2.5</sub> controls on APU could significantly reduce PM<sub>2.5</sub> emissions, as shown in Table VIII-18 below. For additional details, see Section III.C.3 of the preamble.

TABLE VIII-18—PROJECTED IMPACT ON PM<sub>2.5</sub> EMISSIONS OF FURTHER PM<sub>2.5</sub> CONTROL ON APUS—PREFERRED ALTERNATIVE VS. ALT 1a USING ANALYSIS METHOD B (US SHORT TONS)<sup>a</sup>

CY	Proposed program inventory without further PM <sub>2.5</sub> control on APUs	Proposed program inventory with further PM <sub>2.5</sub> control on APUs	Net impact of further PM <sub>2.5</sub> control on APUs
2035 .....	23,083	19,999	– 3,084
2050 .....	26,932	22,588	– 4,344

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

It is worth noting that the emission reductions shown in Table VIII-16 are not incremental to the emissions reductions projected in the Phase 1 rulemaking. This is because, as described in Sections III.D.2.a of the preamble, the agencies have revised their assumptions about the adoption rate of APUs. This proposal assumes that without the proposed Phase 2

program (*i.e.*, in the Phase 2 reference case), the APU adoption rate will be 30 percent for model years 2010 and later, which is the value used in the Phase 1 reference case. EPA conducted an analysis to estimate the combined emissions impacts of the Phase 1 and the proposed Phase 2 programs for NO<sub>x</sub>, VOC, SO<sub>x</sub> and PM<sub>2.5</sub> in calendar year 2050 using MOVES2014. The results are

shown in Table VIII-19. For NO<sub>x</sub> and PM<sub>2.5</sub> only, we estimated the combined Phase 1 and Phase 2 downstream and upstream emissions impacts for calendar year 2025, and project that the two rules combined would reduce NO<sub>x</sub> by up to 120,000 tons and PM<sub>2.5</sub> by up to 2,000 tons in that year. For additional details, see Chapter 5 of the draft RIA.

<sup>413</sup> The projected use of APU during extended idling is presented in Table VII-3 of the preamble.

TABLE VIII-19—COMBINED PHASE 1 AND PHASE 2 ANNUAL DOWNSTREAM IMPACTS ON CRITERIA POLLUTANTS FROM HEAVY-DUTY SECTOR IN CALENDAR YEAR 2050—PREFERRED ALTERNATIVE vs. ALT 1a USING ANALYSIS METHOD B  
[US short tons]<sup>a</sup>

CY	NO <sub>x</sub>	VOC	SO <sub>x</sub>	PM <sub>2.5b</sub>
2050 .....	-403,915	-69,415	-2,111	1,890

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Positive number reflects an increase in emissions.

(iii) Total Impacts of the Proposed Program and Alternative 4

As shown in Table VIII-20 and Table VIII-21, agencies estimate that both the proposed program and Alternative 4 would result in overall net reductions of

NO<sub>x</sub>, VOC, SO<sub>x</sub>, CO, PM<sub>2.5</sub>, and air toxics emissions. The downstream increase in PM<sub>2.5</sub> due to APU use is expected to be more than offset by reductions in PM<sub>2.5</sub> from upstream.<sup>414</sup> The results are shown both in changes in absolute tons and in percent

reductions from the less dynamic reference to the alternatives for the heavy-duty sector. By 2050, the total impacts of the proposed program and Alternative 4 on criteria pollutants and air toxics are indistinguishable.

TABLE VIII-20—ANNUAL TOTAL IMPACTS (UPSTREAM AND DOWNSTREAM) OF CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—PREFERRED ALTERNATIVE vs. ALT 1a USING ANALYSIS METHOD B<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	% Reduction	US short tons	% Reduction	US short tons	% Reduction	US short tons
1,3-Butadiene .....	-9	-2.7	-25	-15.1	-36	-19.4
Acetaldehyde .....	-674	-10.1	-1,902	-30.5	-2,697	-36.0
Acrolein .....	-97	-9.8	-274	-31.3	-388	-36.9
Benzene .....	-149	-5.4	-445	-18.8	-633	-22.9
CO .....	-29,622	-1.9	-85,961	-6.6	-122,659	-8.4
Formaldehyde .....	-2,121	-11.4	-5,978	-31.7	-8,475	-37.0
NO <sub>x</sub> .....	-102,502	-7.2	-298,907	-26.6	-426,610	-32.1
PM <sub>2.5</sub> .....	-386	-0.6	-1,883	-4.2	-2,815	-5.4
SO <sub>x</sub> .....	-6,070	-4.9	-20,777	-15.3	-30,000	-18.4
VOC .....	-16,724	-5.6	-52,872	-18.8	-75,521	-22.7

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE VIII-21—ANNUAL TOTAL IMPACTS (UPSTREAM AND DOWNSTREAM) OF CRITERIA POLLUTANTS AND AIR TOXICS FROM HEAVY-DUTY SECTOR IN CALENDAR YEARS 2025, 2035 AND 2050—ALTERNATIVE 4 vs. ALT 1a USING ANALYSIS METHOD B<sup>a</sup>

Pollutant	CY2025		CY2035		CY2050	
	US short tons	% Reduction	US short tons	% Reduction	US short tons	% Reduction
1,3-Butadiene .....	-9	-2.8	-26	-15.2	-36	-19.4
Acetaldehyde .....	-676	-10.1	-1,903	-30.6	-2,697	-36.0
Acrolein .....	-97	-9.8	-274	-31.3	-388	-36.9
Benzene .....	-157	-5.7	-450	-18.9	-634	-22.9
CO .....	-30,580	-1.9	-86,526	-6.6	-122,703	-8.4
Formaldehyde .....	-2,125	-11.4	-5,980	-31.7	-8,476	-37.0
NO <sub>x</sub> .....	-106,180	-7.4	-301,339	-26.8	-426,796	-32.1
PM <sub>2.5</sub> .....	-646	-1.1	-2,036	-4.6	-2,827	-5.4
SO <sub>x</sub> .....	-7,450	-6.1	-21,550	-15.9	-30,064	-18.4
VOC .....	-18,652	-6.2	-53,966	-19.2	-75,621	-22.7

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>414</sup> Although net reduction in PM<sub>2.5</sub> is expected at the national level, it is unlikely that the geographic location of increases in downstream PM<sub>2.5</sub>

emissions will coincide with the location of decreases in upstream PM<sub>2.5</sub> emissions. For further

details, see Section VIII.D of this preamble and in Chapter 8 of the draft RIA.

## (b) Model Year Lifetime Analysis

In addition to the annual non-GHG emissions reductions expected from the proposed rules and Alternative 4, the combined (downstream and upstream)

non-GHG impacts for the lifetime of the impacted vehicles were estimated. Table VIII–22 shows the fleet-wide reductions of NO<sub>x</sub>, PM<sub>2.5</sub> and SO<sub>x</sub> from the preferred alternative and Alternative 4,

relative to Alternative 1a, through the lifetime<sup>415</sup> of heavy-duty vehicles. For the lifetime non-GHG reductions by vehicle categories, see Chapter 5 of the draft RIA.

TABLE VIII–22—LIFETIME NON-GHG REDUCTIONS USING ANALYSIS METHOD B—SUMMARY FOR MODEL YEARS 2018–2029  
[US short tons]<sup>a</sup>

No-action alternative (baseline)	Alternative 3 (proposed)	Alternative 4
	1a (Less dynamic)	1a (Less dynamic)
NO <sub>x</sub> .....	2,399,990	2,459,497
Downstream .....	2,139,331	2,167,512
Upstream .....	260,659	291,986
PM <sub>2.5</sub> .....	15,206	19,151
Downstream <sup>b</sup> .....	– 13,528	– 13,089
Upstream .....	28,733	32,240
SO <sub>x</sub> .....	169,436	189,904
Downstream .....	6,158	7,035
Upstream .....	163,278	182,869

**Notes:**

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup> Negative number means emissions would increase from reference to control case. PM<sub>2.5</sub> from tire wear and brake wear are included.

*B. Health Effects of Non-GHG Pollutants*

In this section, we discuss health effects associated with exposure to some of the criteria and air toxic pollutants impacted by the proposed and alternative heavy-duty vehicle standards.

## (1) Particulate Matter

## (a) Background

Particulate matter is a highly complex mixture of solid particles and liquid droplets distributed among numerous atmospheric gases which interact with solid and liquid phases. Particles range in size from those smaller than 1 nanometer (10<sup>–9</sup> meter) to over 100 micrometer (μm, or 10<sup>–6</sup> meter) in diameter (for reference, a typical strand of human hair is 70 μm in diameter and a grain of salt is about 100 μm). Atmospheric particles can be grouped into several classes according to their aerodynamic and physical sizes. Generally, the three broad classes of particles considered by EPA include ultrafine particles (UFP, aerodynamic diameter <0.1 μm), “fine” particles (PM<sub>2.5</sub>; particles with a nominal mean aerodynamic diameter less than or equal to 2.5 μm), and “thoracic” particles (PM<sub>10</sub>; particles with a nominal mean

aerodynamic diameter less than or equal to 10 μm).<sup>416</sup> Particles that fall within the size range between PM<sub>2.5</sub> and PM<sub>10</sub>, are referred to as “thoracic coarse particles” (PM<sub>10–2.5</sub>, particles with a nominal mean aerodynamic diameter less than or equal to 10 μm and greater than 2.5 μm). EPA currently has standards that regulate PM<sub>2.5</sub> and PM<sub>10</sub>.<sup>417</sup>

Particles span many sizes and shapes and may consist of hundreds of different chemicals. Particles are emitted directly from sources and are also formed through atmospheric chemical reactions; the former are often referred to as “primary” particles, and the latter as “secondary” particles. Particle concentration and composition varies by time of year and location, and in addition to differences in source emissions, is affected by several weather-related factors, such as temperature, clouds, humidity, and wind. A further layer of complexity comes from particles’ ability to shift between solid/liquid and gaseous phases, which is influenced by concentration and meteorology, especially temperature.

Fine particles are produced primarily by combustion processes and by

transformations of gaseous emissions (e.g., sulfur oxides (SO<sub>x</sub>), oxides of nitrogen, and volatile organic compounds (VOC)) in the atmosphere. The chemical and physical properties of PM<sub>2.5</sub> may vary greatly with time, region, meteorology, and source category. Thus, PM<sub>2.5</sub> may include a complex mixture of different components including sulfates, nitrates, organic compounds, elemental carbon and metal compounds. These particles can remain in the atmosphere for days to weeks and travel hundreds to thousands of kilometers.

## (b) Health Effects of PM

Scientific studies show ambient PM is associated with a broad range of health effects. These health effects are discussed in detail in the December 2009 Integrated Science Assessment for Particulate Matter (PM ISA).<sup>418</sup> The PM ISA summarizes health effects evidence associated with both short- and long-term exposures to PM<sub>2.5</sub>, PM<sub>10–2.5</sub>, and ultrafine particles. The PM ISA concludes that human exposures to ambient PM<sub>2.5</sub> concentrations are associated with a number of adverse health effects and characterizes the weight of evidence for these health

<sup>415</sup> A lifetime of 30 years is assumed in MOVES.

<sup>416</sup> U.S. EPA. (2009). Integrated Science Assessment for Particulate Matter (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R–08/139F. Figure 3–1.

<sup>417</sup> Regulatory definitions of PM size fractions, and information on reference and equivalent

methods for measuring PM in ambient air, are provided in 40 CFR parts 50, 53, and 58. With regard to national ambient air quality standards (NAAQS) which provide protection against health and welfare effects, the 24-hour PM<sub>10</sub> standard provides protection against effects associated with

short-term exposure to thoracic coarse particles (i.e., PM<sub>10–2.5</sub>).

<sup>418</sup> U.S. EPA. (2009). Integrated Science Assessment for Particulate Matter (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R–08/139F.

outcomes.<sup>419</sup> The discussion below highlights the PM ISA's conclusions pertaining to health effects associated with both short- and long-term PM exposures. Further discussion of health effects associated with PM<sub>2.5</sub> can also be found in the rulemaking documents for the most recent review of the PM NAAQS completed in 2012.<sup>420 421</sup>

EPA has concluded that a causal relationship exists between both long- and short-term exposures to PM<sub>2.5</sub> and premature mortality and cardiovascular effects and a likely causal relationship exists between long- and short-term PM<sub>2.5</sub> exposures and respiratory effects. Further, there is evidence suggestive of a causal relationship between long-term PM<sub>2.5</sub> exposures and other health effects, including developmental and reproductive effects (e.g., low birth weight, infant mortality) and carcinogenic, mutagenic, and genotoxic effects (e.g., lung cancer mortality).<sup>422</sup>

As summarized in the Final PM NAAQS rule, and discussed extensively in the 2009 p.m. ISA, the available scientific evidence significantly strengthens the link between long- and short-term exposure to PM<sub>2.5</sub> and premature mortality, while providing indications that the magnitude of the PM<sub>2.5</sub>-mortality association with long-term exposures may be larger than previously estimated.<sup>423 424</sup> The strongest evidence comes from recent studies investigating long-term exposure to PM<sub>2.5</sub> and cardiovascular-related mortality. The evidence supporting a

causal relationship between long-term PM<sub>2.5</sub> exposure and mortality also includes consideration of new studies that demonstrated an improvement in community health following reductions in ambient fine particles.

Several studies evaluated in the 2009 p.m. ISA have examined the association between cardiovascular effects and long-term PM<sub>2.5</sub> exposures in multi-city epidemiological studies conducted in the U.S. and Europe. These studies have provided new evidence linking long-term exposure to PM<sub>2.5</sub> with an array of cardiovascular effects such as heart attacks, congestive heart failure, stroke, and mortality. This evidence is coherent with studies of effects associated with short-term exposure to PM<sub>2.5</sub> that have observed associations with a continuum of effects ranging from subtle changes in indicators of cardiovascular health to serious clinical events, such as increased hospitalizations and emergency department visits due to cardiovascular disease and cardiovascular mortality.<sup>425</sup>

As detailed in the 2009 p.m. ISA, extended analyses of seminal epidemiological studies, as well as more recent epidemiological studies conducted in the U.S. and abroad, provide strong evidence of respiratory-related morbidity effects associated with long-term PM<sub>2.5</sub> exposure. The strongest evidence for respiratory-related effects is from studies that evaluated decrements in lung function growth (in children), increased respiratory symptoms, and asthma development. The strongest evidence from short-term PM<sub>2.5</sub> exposure studies has been observed for increased respiratory-related emergency department visits and hospital admissions for chronic obstructive pulmonary disease (COPD) and respiratory infections.<sup>426</sup>

The body of scientific evidence detailed in the 2009 p.m. ISA is still limited with respect to associations between long-term PM<sub>2.5</sub> exposures and developmental and reproductive effects as well as cancer, mutagenic, and genotoxic effects. The strongest evidence for an association between PM<sub>2.5</sub> and developmental and reproductive effects comes from epidemiological studies of low birth weight and infant mortality, especially

due to respiratory causes during the post-neonatal period (*i.e.*, 1 month to 12 months of age).<sup>427</sup> With regard to cancer effects, "[m]ultiple epidemiologic studies have shown a consistent positive association between PM<sub>2.5</sub> and lung cancer mortality, but studies have generally not reported associations between PM<sub>2.5</sub> and lung cancer incidence."<sup>428</sup>

Specific groups within the general population are at increased risk for experiencing adverse health effects related to PM exposures.<sup>429 430 431 432</sup> The evidence detailed in the 2009 p.m. ISA expands our understanding of previously identified at-risk populations and lifestyles (*i.e.*, children, older adults, and individuals with pre-existing heart and lung disease) and supports the identification of additional at-risk populations (e.g., persons with lower socioeconomic status, genetic differences). Additionally, there is emerging, though still limited, evidence for additional potentially at-risk populations and lifestyles, such as those with diabetes, people who are obese, pregnant women, and the developing fetus.<sup>433</sup>

For PM<sub>10-2.5</sub>, the 2009 p.m. ISA concluded that available evidence was suggestive of a causal relationship between short-term exposures to PM<sub>10-2.5</sub> and cardiovascular effects (e.g., hospital admissions and ED visits, changes in cardiovascular function), respiratory effects (e.g., ED visits and hospital admissions, increase in markers of pulmonary inflammation), and premature mortality. Data were inadequate to draw conclusions regarding the relationships between long-term exposure to PM<sub>10-2.5</sub> and various health effects.<sup>434 435 436</sup>

<sup>419</sup> The causal framework draws upon the assessment and integration of evidence from across epidemiological, controlled human exposure, and toxicological studies, and the related uncertainties that ultimately influence our understanding of the evidence. This framework employs a five-level hierarchy that classifies the overall weight of evidence and causality using the following categorizations: causal relationship, likely to be causal relationship, suggestive of a causal relationship, inadequate to infer a causal relationship, and not likely to be a causal relationship (U.S. EPA. (2009). Integrated Science Assessment for Particulate Matter (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-08/139F, Table 1-3).

<sup>420</sup> 78 FR 3103-3104, January 15, 2013.

<sup>421</sup> 77 FR 38906-38911, June 29, 2012.

<sup>422</sup> These causal inferences are based not only on the more expansive epidemiological evidence available in this review but also reflect consideration of important progress that has been made to advance our understanding of a number of potential biologic modes of action or pathways for PM-related cardiovascular and respiratory effects (U.S. EPA. (2009). Integrated Science Assessment for Particulate Matter (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-08/139F, Chapter 5).

<sup>423</sup> 78 FR 3103-3104, January 15, 2013.

<sup>424</sup> U.S. EPA. (2009). Integrated Science Assessment for Particulate Matter (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-08/139F, Chapter 6 (Section 6.5) and Chapter 7 (Section 7.6).

<sup>425</sup> U.S. EPA. (2009). Integrated Science Assessment for Particulate Matter (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-08/139F, Chapter 2 (Section 2.3.1 and 2.3.2) and Chapter 6.

<sup>426</sup> U.S. EPA. (2009). Integrated Science Assessment for Particulate Matter (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-08/139F, Chapter 2 (Section 2.3.1 and 2.3.2) and Chapter 6.

<sup>427</sup> U.S. EPA. (2009). Integrated Science Assessment for Particulate Matter (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-08/139F, Chapter 2 (Section 2.3.1 and 2.3.2) and Chapter 7.

<sup>428</sup> U.S. EPA. (2009). Integrated Science Assessment for Particulate Matter (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-08/139F, pg 2-13

<sup>429</sup> U.S. EPA. (2009). Integrated Science Assessment for Particulate Matter (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-08/139F, Chapter 8 and Chapter 2.

<sup>430</sup> 77 FR 38890, June 29, 2012.

<sup>431</sup> 78 FR 3104, January 15, 2013.

<sup>432</sup> U.S. EPA. (2011). Policy Assessment for the Review of the PM NAAQS. U.S. Environmental Protection Agency, Washington, DC, EPA/452/R-11-003. Section 2.2.1.

<sup>433</sup> U.S. EPA. (2009). Integrated Science Assessment for Particulate Matter (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-08/139F, Chapter 8 and Chapter 2 (Section 2.4.1).

<sup>434</sup> U.S. EPA. (2009). Integrated Science Assessment for Particulate Matter (Final Report).

For ultrafine particles, the 2009 p.m. ISA concluded that the evidence was suggestive of a causal relationship between short-term exposures and cardiovascular effects, including changes in heart rhythm and vasomotor function (the ability of blood vessels to expand and contract). It also concluded that there was evidence suggestive of a causal relationship between short-term exposure to ultrafine particles and respiratory effects, including lung function and pulmonary inflammation, with limited and inconsistent evidence for increases in ED visits and hospital admissions. Data were inadequate to draw conclusions regarding the relationship between short-term exposure to ultrafine particle and additional health effects including premature mortality as well as long-term exposure to ultrafine particles and all health outcomes evaluated.<sup>437 438</sup>

## (2) Ozone

### (a) Background

Ground-level ozone pollution is typically formed through reactions involving VOC and NO<sub>x</sub> in the lower atmosphere in the presence of sunlight. These pollutants, often referred to as ozone precursors, are emitted by many types of pollution sources, such as highway and nonroad motor vehicles and engines, power plants, chemical plants, refineries, makers of consumer and commercial products, industrial facilities, and smaller area sources.

The science of ozone formation, transport, and accumulation is complex. Ground-level ozone is produced and destroyed in a cyclical set of chemical reactions, many of which are sensitive to temperature and sunlight. When ambient temperatures and sunlight levels remain high for several days and the air is relatively stagnant, ozone and its precursors can build up and result in more ozone than typically occurs on a single high-temperature day. Ozone and its precursors can be transported hundreds of miles downwind from precursor emissions, resulting in elevated ozone levels even in areas with low local VOC or NO<sub>x</sub> emissions.

### (b) Health Effects of Ozone

This section provides a summary of the health effects associated with exposure to ambient concentrations of ozone.<sup>439</sup> The information in this section is based on the information and conclusions in the February 2013 Integrated Science Assessment for Ozone (Ozone ISA).<sup>440</sup> The Ozone ISA concludes that human exposures to ambient concentrations of ozone are associated with a number of adverse health effects and characterizes the weight of evidence for these health effects.<sup>441</sup> The discussion below highlights the Ozone ISA's conclusions pertaining to health effects associated with both short-term and long-term periods of exposure to ozone.

For short-term exposure to ozone, the Ozone ISA concludes that respiratory effects, including lung function decrements, pulmonary inflammation, exacerbation of asthma, respiratory-related hospital admissions, and mortality, are causally associated with ozone exposure. It also concludes that cardiovascular effects, including decreased cardiac function and increased vascular disease, and total mortality are likely to be causally associated with short-term exposure to ozone and that evidence is suggestive of a causal relationship between central nervous system effects and short-term exposure to ozone.

For long-term exposure to ozone, the Ozone ISA concludes that respiratory effects, including new onset asthma, pulmonary inflammation and injury, are likely to be causally related with ozone exposure. The Ozone ISA characterizes the evidence as suggestive of a causal relationship for associations between long-term ozone exposure and cardiovascular effects, reproductive and developmental effects, central nervous system effects and total mortality. The

evidence is inadequate to infer a causal relationship between chronic ozone exposure and increased risk of lung cancer.

Finally, interindividual variation in human responses to ozone exposure can result in some groups being at increased risk for detrimental effects in response to exposure. The Ozone ISA identified several groups that are at increased risk for ozone-related health effects. These groups are people with asthma, children and older adults, individuals with reduced intake of certain nutrients (*i.e.*, Vitamins C and E), outdoor workers, and individuals having certain genetic variants related to oxidative metabolism or inflammation. Ozone exposure during childhood can have lasting effects through adulthood. Such effects include altered function of the respiratory and immune systems. Children absorb higher doses (normalized to lung surface area) of ambient ozone, compared to adults, due to their increased time spent outdoors, higher ventilation rates relative to body size, and a tendency to breathe a greater fraction of air through the mouth. Children also have a higher asthma prevalence compared to adults. Additional children's vulnerability and susceptibility factors are listed in Section XIV.

## (3) Nitrogen Oxides

### (a) Background

Nitrogen dioxide (NO<sub>2</sub>) is a member of the NO<sub>x</sub> family of gases. Most NO<sub>2</sub> is formed in the air through the oxidation of nitric oxide (NO) emitted when fuel is burned at a high temperature. NO<sub>2</sub> and its gas phase oxidation products can dissolve in water droplets and further oxidize to form nitric acid which reacts with ammonia to form nitrates, which are important components of ambient PM. The health effects of ambient PM are discussed in Section VIII.B.1.b of this preamble. NO<sub>x</sub> and VOC are the two major precursors of ozone. The health effects of ozone are covered in Section VIII.B.2.b.

### (b) Health Effects of Nitrogen Oxides

The most recent review of the health effects of oxides of nitrogen completed by EPA can be found in the 2008 Integrated Science Assessment for Oxides of Nitrogen—Health Criteria (Oxides of Nitrogen ISA).<sup>442</sup> EPA concluded that the findings of epidemiological, controlled human exposure, and animal toxicological

U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-08/139F. Section 2.3.4 and Table 2-6.

<sup>435</sup> 78 FR 3167–3168, January 15, 2013.

<sup>436</sup> 77 FR 38947–38951, June 29, 2012.

<sup>437</sup> U.S. EPA. (2009). Integrated Science Assessment for Particulate Matter (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-08/139F. Section 2.3.5 and Table 2-6.

<sup>438</sup> 78 FR 3121, January 15, 2013.

<sup>439</sup> Human exposure to ozone varies over time due to changes in ambient ozone concentration and because people move between locations which have notable different ozone concentrations. Also, the amount of ozone delivered to the lung is not only influenced by the ambient concentrations but also by the individuals breathing route and rate.

<sup>440</sup> U.S. EPA. Integrated Science Assessment of Ozone and Related Photochemical Oxidants (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-10/076F, 2013. The ISA is available at <http://cfpub.epa.gov/ncea/isa/recordisplay.cfm?deid=247492#Download>.

<sup>441</sup> The ISA evaluates evidence and draws conclusions on the causal relationship between relevant pollutant exposures and health effects, assigning one of five “weight of evidence” determinations: causal relationship, likely to be a causal relationship, suggestive of a causal relationship, inadequate to infer a causal relationship, and not likely to be a causal relationship. For more information on these levels of evidence, please refer to Table II in the Preamble of the ISA.

<sup>442</sup> U.S. EPA (2008). *Integrated Science Assessment for Oxides of Nitrogen—Health Criteria (Final Report)*. EPA/600/R-08/071. Washington, DC: U.S. EPA.

studies provided evidence that was sufficient to infer a likely causal relationship between respiratory effects and short-term NO<sub>2</sub> exposure. The 2008 ISA for Oxides of Nitrogen concluded that the strongest evidence for such a relationship comes from epidemiological studies of respiratory effects including increased respiratory symptoms, emergency department visits, and hospital admissions. Based on both short- and long-term exposure studies, the 2008 ISA for Oxides of Nitrogen concluded that individuals with preexisting pulmonary conditions (e.g., asthma or COPD), children, and older adults are potentially at greater risk of NO<sub>2</sub>-related respiratory effects. Based on findings from controlled human exposure studies, the 2008 ISA for Oxides of Nitrogen also drew two broad conclusions regarding airway responsiveness following NO<sub>2</sub> exposure. First, the ISA concluded that NO<sub>2</sub> exposure may enhance the sensitivity to allergen-induced decrements in lung function and increase the allergen-induced airway inflammatory response following 30-minute exposures of asthmatic adults to NO<sub>2</sub> concentrations as low as 260 ppb.<sup>443</sup> Second, exposure to NO<sub>2</sub> was found to enhance the inherent responsiveness of the airway to subsequent nonspecific challenges in controlled human exposure studies of healthy and asthmatic adults. Statistically significant increases in nonspecific airway responsiveness were reported for asthmatic adults following 30-minute exposures to 200–300 ppb NO<sub>2</sub> and following 1-hour exposures to 100 ppb NO<sub>2</sub>.<sup>444</sup> Enhanced airway responsiveness could have important clinical implications for asthmatics since transient increases in airway responsiveness following NO<sub>2</sub> exposure have the potential to increase symptoms and worsen asthma control. Together, the epidemiological and experimental data sets formed a plausible, consistent, and coherent description of a relationship between NO<sub>2</sub> exposures and an array of adverse health effects that range from the onset of respiratory symptoms to hospital admissions and emergency department visits for respiratory causes, especially asthma.<sup>445</sup>

<sup>443</sup> U.S. EPA (2008). Integrated Science Assessment for Oxides of Nitrogen—Health Criteria (Final Report). EPA/600/R-08/071. Washington, DC: U.S. EPA, Section 3.1.3.1.

<sup>444</sup> U.S. EPA (2008). Integrated Science Assessment for Oxides of Nitrogen—Health Criteria (Final Report). EPA/600/R-08/071. Washington, DC: U.S. EPA, Section 3.1.3.2.

<sup>445</sup> U.S. EPA (2008). Integrated Science Assessment for Oxides of Nitrogen—Health Criteria (Final Report). EPA/600/R-08/071. Washington, DC: U.S. EPA, Section 3.1.7.

In evaluating a broader range of health effects, the 2008 ISA for Oxides of Nitrogen concluded evidence was “suggestive but not sufficient to infer a causal relationship” between short-term NO<sub>2</sub> exposure and premature mortality and between long-term NO<sub>2</sub> exposure and respiratory effects. The latter was based largely on associations observed between long-term NO<sub>2</sub> exposure and decreases in lung function growth in children. Furthermore, the 2008 ISA for Oxides of Nitrogen concluded that evidence was “inadequate to infer the presence or absence of a causal relationship” between short-term NO<sub>2</sub> exposure and cardiovascular effects as well as between long-term NO<sub>2</sub> exposure and cardiovascular effects, reproductive and developmental effects, premature mortality, and cancer.<sup>446</sup> The conclusions for these health effect categories were informed by uncertainties in the evidence base such as the independent effects of NO<sub>2</sub> exposure within the broader mixture of traffic-related pollutants, limited evidence from experimental studies, and/or an overall limited literature base.

#### (4) Sulfur Oxides

##### (a) Background

Sulfur dioxide (SO<sub>2</sub>), a member of the sulfur oxide (SO<sub>x</sub>) family of gases, is formed from burning fuels containing sulfur (e.g., coal or oil derived), extracting gasoline from oil, or extracting metals from ore. SO<sub>2</sub> and its gas phase oxidation products can dissolve in water droplets and further oxidize to form sulfuric acid which reacts with ammonia to form sulfates, which are important components of ambient PM. The health effects of ambient PM are discussed in Section VIII.B.1.b of this preamble.

##### (b) Health Effects of SO<sub>2</sub>

Information on the health effects of SO<sub>2</sub> can be found in the 2008 Integrated Science Assessment for Sulfur Oxides—Health Criteria (SO<sub>x</sub> ISA).<sup>447</sup> Short-term peaks of SO<sub>2</sub> have long been known to cause adverse respiratory health effects, particularly among individuals with asthma. In addition to those with asthma (both children and adults), potentially sensitive groups include all children and the elderly. During periods

<sup>446</sup> U.S. EPA (2008). Integrated Science Assessment for Oxides of Nitrogen—Health Criteria (Final Report). EPA/600/R-08/071. Washington, DC: U.S. EPA.

<sup>447</sup> U.S. EPA. (2008). *Integrated Science Assessment (ISA) for Sulfur Oxides—Health Criteria (Final Report)*. EPA/600/R-08/047F. Washington, DC: U.S. Environmental Protection Agency.

of elevated ventilation, asthmatics may experience symptomatic bronchoconstriction within minutes of exposure. Following an extensive evaluation of health evidence from epidemiologic and laboratory studies, EPA concluded that there is a causal relationship between respiratory health effects and short-term exposure to SO<sub>2</sub>. Separately, based on an evaluation of the epidemiologic evidence of associations between short-term exposure to SO<sub>2</sub> and mortality, EPA concluded that the overall evidence is suggestive of a causal relationship between short-term exposure to SO<sub>2</sub> and mortality. Additional information on the health effects of SO<sub>2</sub> is available in Chapter 6.1.1.4.2 of the RIA.

#### (5) Carbon Monoxide

##### (a) Background

Carbon monoxide (CO) is a colorless, odorless gas emitted from combustion processes. Nationally and, particularly in urban areas, the majority of CO emissions to ambient air come from mobile sources.

##### (b) Health Effects of Carbon Monoxide

Information on the health effects of CO can be found in the January 2010 Integrated Science Assessment for Carbon Monoxide (CO ISA).<sup>448</sup> The CO ISA concludes that ambient concentrations of CO are associated with a number of adverse health effects.<sup>449</sup> This section provides a summary of the health effects associated with exposure to ambient concentrations of CO.<sup>450</sup>

Controlled human exposure studies of subjects with coronary artery disease show a decrease in the time to onset of exercise-induced angina (chest pain) and electrocardiogram changes following CO exposure. In addition, epidemiologic studies show associations between short-term CO exposure and

<sup>448</sup> U.S. EPA. (2010). Integrated Science Assessment for Carbon Monoxide (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-09/019F, 2010. Available at <http://cfpub.epa.gov/ncea/cfm/recordisplay.cfm?deid=218686>.

<sup>449</sup> The ISA evaluates the health evidence associated with different health effects, assigning one of five “weight of evidence” determinations: causal relationship, likely to be a causal relationship, suggestive of a causal relationship, inadequate to infer a causal relationship, and not likely to be a causal relationship. For definitions of these levels of evidence, please refer to Section 1.6 of the ISA.

<sup>450</sup> Personal exposure includes contributions from many sources, and in many different environments. Total personal exposure to CO includes both ambient and nonambient components; and both components may contribute to adverse health effects.

cardiovascular morbidity, particularly increased emergency room visits and hospital admissions for coronary heart disease (including ischemic heart disease, myocardial infarction, and angina). Some epidemiologic evidence is also available for increased hospital admissions and emergency room visits for congestive heart failure and cardiovascular disease as a whole. The CO ISA concludes that a causal relationship is likely to exist between short-term exposures to CO and cardiovascular morbidity. It also concludes that available data are inadequate to conclude that a causal relationship exists between long-term exposures to CO and cardiovascular morbidity.

Animal studies show various neurological effects with in-utero CO exposure. Controlled human exposure studies report central nervous system and behavioral effects following low-level CO exposures, although the findings have not been consistent across all studies. The CO ISA concludes the evidence is suggestive of a causal relationship with both short- and long-term exposure to CO and central nervous system effects.

A number of studies cited in the CO ISA have evaluated the role of CO exposure in birth outcomes such as preterm birth or cardiac birth defects. The epidemiologic studies provide limited evidence of a CO-induced effect on preterm births and birth defects, with weak evidence for a decrease in birth weight. Animal toxicological studies have found perinatal CO exposure to affect birth weight, as well as other developmental outcomes. The CO ISA concludes the evidence is suggestive of a causal relationship between long-term exposures to CO and developmental effects and birth outcomes.

Epidemiologic studies provide evidence of associations between ambient CO concentrations and respiratory morbidity such as changes in pulmonary function, respiratory symptoms, and hospital admissions. A limited number of epidemiologic studies considered copollutants such as ozone, SO<sub>2</sub>, and PM in two-pollutant models and found that CO risk estimates were generally robust, although this limited evidence makes it difficult to disentangle effects attributed to CO itself from those of the larger complex air pollution mixture. Controlled human exposure studies have not extensively evaluated the effect of CO on respiratory morbidity. Animal studies at levels of 50–100 ppm CO show preliminary evidence of altered pulmonary vascular remodeling and oxidative injury. The CO ISA concludes that the evidence is

suggestive of a causal relationship between short-term CO exposure and respiratory morbidity, and inadequate to conclude that a causal relationship exists between long-term exposure and respiratory morbidity.

Finally, the CO ISA concludes that the epidemiologic evidence is suggestive of a causal relationship between short-term concentrations of CO and mortality. Epidemiologic studies provide evidence of an association between short-term exposure to CO and mortality, but limited evidence is available to evaluate cause-specific mortality outcomes associated with CO exposure. In addition, the attenuation of CO risk estimates which was often observed in copollutant models contributes to the uncertainty as to whether CO is acting alone or as an indicator for other combustion-related pollutants. The CO ISA also concludes that there is not likely to be a causal relationship between relevant long-term exposures to CO and mortality.

#### (6) Diesel Exhaust

##### (a) Background

Diesel exhaust consists of a complex mixture composed of carbon dioxide, oxygen, nitrogen, water vapor, carbon monoxide, nitrogen compounds, sulfur compounds and numerous low-molecular-weight hydrocarbons. A number of these gaseous hydrocarbon components are individually known to be toxic, including aldehydes, benzene and 1,3-butadiene. The diesel particulate matter present in diesel exhaust consists mostly of fine particles (< 2.5 µm), of which a significant fraction is ultrafine particles (< 0.1 µm). These particles have a large surface area which makes them an excellent medium for adsorbing organics and their small size makes them highly respirable. Many of the organic compounds present in the gases and on the particles, such as polycyclic organic matter, are individually known to have mutagenic and carcinogenic properties.

Diesel exhaust varies significantly in chemical composition and particle sizes between different engine types (heavy-duty, light-duty), engine operating conditions (idle, accelerate, decelerate), and fuel formulations (high/low sulfur fuel). Also, there are emissions differences between on-road and nonroad engines because the nonroad engines are generally of older technology. After being emitted in the engine exhaust, diesel exhaust undergoes dilution as well as chemical and physical changes in the atmosphere. The lifetime for some of the compounds

present in diesel exhaust ranges from hours to days.

##### (b) Health Effects of Diesel Exhaust

In EPA's 2002 Diesel Health Assessment Document (Diesel HAD), exposure to diesel exhaust was classified as likely to be carcinogenic to humans by inhalation from environmental exposures, in accordance with the revised draft 1996/1999 EPA cancer guidelines.<sup>451 452</sup> A number of other agencies (National Institute for Occupational Safety and Health, the International Agency for Research on Cancer, the World Health Organization, California EPA, and the U.S. Department of Health and Human Services) had made similar hazard classifications prior to 2002. EPA also concluded in the 2002 Diesel HAD that it was not possible to calculate a cancer unit risk for diesel exhaust due to limitations in the exposure data for the occupational groups or the absence of a dose-response relationship.

In the absence of a cancer unit risk, the Diesel HAD sought to provide additional insight into the significance of the diesel exhaust cancer hazard by estimating possible ranges of risk that might be present in the population. An exploratory analysis was used to characterize a range of possible lung cancer risk. The outcome was that environmental risks of cancer from long-term diesel exhaust exposures could plausibly range from as low as 10<sup>-5</sup> to as high as 10<sup>-3</sup>. Because of uncertainties, the analysis acknowledged that the risks could be lower than 10<sup>-5</sup>, and a zero risk from diesel exhaust exposure could not be ruled out.

Non-cancer health effects of acute and chronic exposure to diesel exhaust emissions are also of concern to EPA. EPA derived a diesel exhaust reference concentration (RfC) from consideration of four well-conducted chronic rat inhalation studies showing adverse pulmonary effects. The RfC is 5 µg/m<sup>3</sup> for diesel exhaust measured as diesel particulate matter. This RfC does not consider allergenic effects such as those associated with asthma or immunologic or the potential for cardiac effects. There was emerging evidence in 2002, discussed in the Diesel HAD, that

<sup>451</sup> U.S. EPA. (1999). *Guidelines for Carcinogen Risk Assessment*. Review Draft. NCEA-F-0644, July. Washington, DC: U.S. EPA. Retrieved on March 19, 2009 from <http://cfpub.epa.gov/ncea/cfm/recorddisplay.cfm?deid=54932>.

<sup>452</sup> U.S. EPA (2002). *Health Assessment Document for Diesel Engine Exhaust*. EPA/600/8-90/057F Office of Research and Development, Washington DC. Retrieved on March 17, 2009 from <http://cfpub.epa.gov/ncea/cfm/recorddisplay.cfm?deid=29060>. pp. 1-1 1-2.



exposure to diesel exhaust can exacerbate these effects, but the exposure-response data were lacking at that time to derive an RFC based on these then emerging considerations. EPA Diesel HAD states, "With [diesel particulate matter] being a ubiquitous component of ambient PM, there is an uncertainty about the adequacy of the existing [diesel exhaust] noncancer database to identify all of the pertinent [diesel exhaust]-caused noncancer health hazards." The Diesel HAD also notes "that acute exposure to [diesel exhaust] has been associated with irritation of the eye, nose, and throat, respiratory symptoms (cough and phlegm), and neurophysiological symptoms such as headache, lightheadedness, nausea, vomiting, and numbness or tingling of the extremities." The Diesel HAD noted that the cancer and noncancer hazard conclusions applied to the general use of diesel engines then on the market and as cleaner engines replace a substantial number of existing ones, the applicability of the conclusions would need to be reevaluated.

It is important to note that the Diesel HAD also briefly summarizes health effects associated with ambient PM and discusses EPA's then-annual PM<sub>2.5</sub> NAAQS of 15 µg/m<sup>3</sup>. In 2012, EPA revised the annual PM<sub>2.5</sub> NAAQS to 12 µg/m<sup>3</sup>. There is a large and extensive body of human data showing a wide spectrum of adverse health effects associated with exposure to ambient PM, of which diesel exhaust is an important component. The PM<sub>2.5</sub> NAAQS is designed to provide protection from the noncancer health effects and premature mortality attributed to exposure to PM<sub>2.5</sub>. The contribution of diesel PM to total ambient PM varies in different regions of the country and also, within a region, from one area to another. The contribution can be high in near-roadway environments, for example, or in other locations where diesel engine use is concentrated.

Since 2002, several new studies have been published which continue to report increased lung cancer risk with occupational exposure to diesel exhaust from older engines. Of particular note since 2011 are three new epidemiology studies which have examined lung cancer in occupational populations, for example, truck drivers, underground nonmetal miners and other diesel motor related occupations. These studies reported increased risk of lung cancer with exposure to diesel exhaust with evidence of positive exposure-response relationships to varying

degrees.<sup>453 454 455</sup> These newer studies (along with others that have appeared in the scientific literature) add to the evidence EPA evaluated in the 2002 Diesel HAD and further reinforces the concern that diesel exhaust exposure likely poses a lung cancer hazard. The findings from these newer studies do not necessarily apply to newer technology diesel engines since the newer engines have large reductions in the emission constituents compared to older technology diesel engines.

In light of the growing body of scientific literature evaluating the health effects of exposure to diesel exhaust, in June 2012 the World Health Organization's International Agency for Research on Cancer (IARC), a recognized international authority on the carcinogenic potential of chemicals and other agents, evaluated the full range of cancer related health effects data for diesel engine exhaust. IARC concluded that diesel exhaust should be regarded as "carcinogenic to humans."<sup>456</sup> This designation was an update from its 1988 evaluation that considered the evidence to be indicative of a "probable human carcinogen."

#### (7) Air Toxics

##### (a) Background

Heavy-duty vehicle emissions contribute to ambient levels of air toxics known or suspected as human or animal carcinogens, or that have noncancer health effects. The population experiences an elevated risk of cancer and other noncancer health effects from exposure to the class of pollutants known collectively as "air toxics."<sup>457</sup> These compounds include, but are not limited to, benzene, 1,3-butadiene, formaldehyde, acetaldehyde, acrolein, polycyclic organic matter, and naphthalene. These compounds were identified as national or regional risk

drivers or contributors in the 2005 National-scale Air Toxics Assessment and have significant inventory contributions from mobile sources.<sup>458</sup>

##### (b) Benzene

EPA's Integrated Risk Information System (IRIS) database lists benzene as a known human carcinogen (causing leukemia) by all routes of exposure, and concludes that exposure is associated with additional health effects, including genetic changes in both humans and animals and increased proliferation of bone marrow cells in mice.<sup>459 460 461</sup> EPA states in its IRIS database that data indicate a causal relationship between benzene exposure and acute lymphocytic leukemia and suggest a relationship between benzene exposure and chronic non-lymphocytic leukemia and chronic lymphocytic leukemia. EPA's IRIS documentation for benzene also lists a range of  $2.2 \times 10^{-6}$  to  $7.8 \times 10^{-6}$  as the unit risk estimate (URE) for benzene.<sup>462 463</sup> The International Agency for Research on Carcinogens (IARC) has determined that benzene is a human carcinogen and the U.S. Department of Health and Human Services (DHHS) has characterized benzene as a known human carcinogen.<sup>464 465</sup>

A number of adverse noncancer health effects including blood disorders, such as pre leukemia and aplastic anemia, have also been associated with long-term exposure to benzene.<sup>466 467</sup>

<sup>458</sup> U.S. EPA (2011) 2005 National-Scale Air Toxics Assessment. <http://www.epa.gov/ttn/atw/nata2005>.

<sup>459</sup> U.S. EPA. (2000). Integrated Risk Information System File for Benzene. This material is available electronically at: <http://www.epa.gov/iris/subst/0276.htm>.

<sup>460</sup> International Agency for Research on Cancer, IARC monographs on the evaluation of carcinogenic risk of chemicals to humans, Volume 29, some industrial chemicals and dyestuffs, International Agency for Research on Cancer, World Health Organization, Lyon, France 1982.

<sup>461</sup> Irons, R.D.; Stillman, W.S.; Colagiovanni, D.B.; Henry, V.A. (1992). Synergistic action of the benzene metabolite hydroquinone on myelopoietic stimulating activity of granulocyte/macrophage colony-stimulating factor in vitro, *Proc. Natl. Acad. Sci.* 89:3691–3695.

<sup>462</sup> A unit risk estimate is defined as the increase in the lifetime risk of an individual who is exposed for a lifetime to 1 µg/m<sup>3</sup> benzene in air.

<sup>463</sup> U.S. EPA. (2000). Integrated Risk Information System File for Benzene. This material is available electronically at: <http://www.epa.gov/iris/subst/0276.htm>.

<sup>464</sup> International Agency for Research on Cancer (IARC). (1987). Monographs on the evaluation of carcinogenic risk of chemicals to humans, Volume 29, Supplement 7, Some industrial chemicals and dyestuffs, World Health Organization, Lyon, France.

<sup>465</sup> NTP. (2014). 13th Report on Carcinogens. Research Triangle Park, NC: U.S. Department of Health and Human Services, Public Health Service, National Toxicology Program.

<sup>466</sup> Aksoy, M. (1989). Hematotoxicity and carcinogenicity of benzene. *Environ. Health Perspect.* 82: 193–197.

<sup>453</sup> Garshick, Eric, Francine Laden, Jaime E. Hart, Mary E. Davis, Ellen A. Eisen, and Thomas J. Smith. 2012. Lung cancer and elemental carbon exposure in trucking industry workers. *Environmental Health Perspectives* 120(9): 1301–1306.

<sup>454</sup> Silverman, D.T., Samanic, C.M., Lubin, J.H., Blair, A.E., Stewart, P.A., Vermeulen, R., & Attfield, M.D. (2012). The diesel exhaust in miners study: A nested case-control study of lung cancer and diesel exhaust. *Journal of the National Cancer Institute*.

<sup>455</sup> Olsson, Ann C., et al. "Exposure to diesel motor exhaust and lung cancer risk in a pooled analysis from case-control studies in Europe and Canada." *American journal of respiratory and critical care medicine* 183.7 (2011): 941–948.

<sup>456</sup> IARC [International Agency for Research on Cancer]. (2013). Diesel and gasoline engine exhausts and some nitroarenes. IARC Monographs Volume 105. [Online at <http://monographs.iarc.fr/ENG/Monographs/vol105/index.php>].

<sup>457</sup> U.S. EPA. (2011) Summary of Results for the 2005 National-Scale Assessment. [www.epa.gov/ttn/atw/nata2005/05pdf/sum\\_results.pdf](http://www.epa.gov/ttn/atw/nata2005/05pdf/sum_results.pdf).

The most sensitive noncancer effect observed in humans, based on current data, is the depression of the absolute lymphocyte count in blood.<sup>468 469</sup> EPA's inhalation reference concentration (RfC) for benzene is 30  $\mu\text{g}/\text{m}^3$ . The RfC is based on suppressed absolute lymphocyte counts seen in humans under occupational exposure conditions. In addition, recent work, including studies sponsored by the Health Effects Institute, provides evidence that biochemical responses are occurring at lower levels of benzene exposure than previously known.<sup>470 471 472 473</sup> EPA's IRIS program has not yet evaluated these new data. EPA does not currently have an acute reference concentration for benzene. The Agency for Toxic Substances and Disease Registry (ATSDR) Minimal Risk Level (MRL) for acute exposure to benzene is 29  $\mu\text{g}/\text{m}^3$  for 1–14 days exposure.<sup>474 475</sup>

### (c) 1,3-Butadiene

EPA has characterized 1,3-butadiene as carcinogenic to humans by inhalation.<sup>476 477</sup> The IARC has

determined that 1,3-butadiene is a human carcinogen and the U.S. DHHS has characterized 1,3-butadiene as a known human carcinogen.<sup>478 479 480</sup> There are numerous studies consistently demonstrating that 1,3-butadiene is metabolized into genotoxic metabolites by experimental animals and humans. The specific mechanisms of 1,3-butadiene-induced carcinogenesis are unknown; however, the scientific evidence strongly suggests that the carcinogenic effects are mediated by genotoxic metabolites. Animal data suggest that females may be more sensitive than males for cancer effects associated with 1,3-butadiene exposure; there are insufficient data in humans from which to draw conclusions about sensitive subpopulations. The URE for 1,3-butadiene is  $3 \times 10^{-5}$  per  $\mu\text{g}/\text{m}^3$ .<sup>481</sup> 1,3-butadiene also causes a variety of reproductive and developmental effects in mice; no human data on these effects are available. The most sensitive effect was ovarian atrophy observed in a lifetime bioassay of female mice.<sup>482</sup> Based on this critical effect and the benchmark concentration methodology, an RfC for chronic health effects was calculated at 0.9 ppb (approximately 2  $\mu\text{g}/\text{m}^3$ ).

### (d) Formaldehyde

In 1991, EPA concluded that formaldehyde is a carcinogen based on

nasal tumors in animal bioassays.<sup>483</sup> An Inhalation URE for cancer and a Reference Dose for oral noncancer effects were developed by the agency and posted on the IRIS database. Since that time, the National Toxicology Program (NTP) and International Agency for Research on Cancer (IARC) have concluded that formaldehyde is a known human carcinogen.<sup>484 485</sup>

The conclusions by IARC and NTP reflect the results of epidemiologic research published since 1991 in combination with previous animal, human and mechanistic evidence. Research conducted by the National Cancer Institute reported an increased risk of nasopharyngeal cancer and specific lymph hematopoietic malignancies among workers exposed to formaldehyde.<sup>486 487 488</sup> A National Institute of Occupational Safety and Health study of garment workers also reported increased risk of death due to leukemia among workers exposed to formaldehyde.<sup>489</sup> Extended follow-up of a cohort of British chemical workers did not report evidence of an increase in nasopharyngeal or lymph hematopoietic cancers, but a continuing statistically significant excess in lung cancers was reported.<sup>490</sup> Finally, a study of embalmers reported formaldehyde exposures to be associated with an increased risk of myeloid leukemia but not brain cancer.<sup>491</sup>

<sup>467</sup> Goldstein, B.D. (1988). Benzene toxicity. Occupational medicine. State of the Art Reviews. 3: 541–554.

<sup>468</sup> Rothman, N., G.L. Li, M. Dosemeci, W.E. Bechtold, G.E. Marti, Y.Z. Wang, M. Linet, L.Q. Xi, W. Lu, M.T. Smith, N. Titenko-Holland, L.P. Zhang, W. Blot, S.N. Yin, and R.B. Hayes. (1996). Hematotoxicity among Chinese workers heavily exposed to benzene. Am. J. Ind. Med. 29: 236–246.

<sup>469</sup> U.S. EPA. (2002). Toxicological Review of Benzene (Noncancer Effects). Environmental Protection Agency, Integrated Risk Information System (IRIS), Research and Development, National Center for Environmental Assessment, Washington DC. This material is available electronically at <http://www.epa.gov/iris/subst/0276.htm>.

<sup>470</sup> Qu, O.; Shore, R.; Li, G.; Jin, X.; Chen, C.L.; Cohen, B.; Melikian, A.; Eastmond, D.; Rappaport, S.; Li, H.; Rupa, D.; Suramaya, R.; Songnian, W.; Huifant, Y.; Meng, M.; Winnik, M.; Kwok, E.; Li, Y.; Mu, R.; Xu, B.; Zhang, X.; Li, K. (2003). HEI Report 115, Validation & Evaluation of Biomarkers in Workers Exposed to Benzene in China.

<sup>471</sup> Qu, Q., R. Shore, G. Li, X. Jin, L.C. Chen, B. Cohen, et al. (2002). Hematological changes among Chinese workers with a broad range of benzene exposures. Am. J. Industr. Med. 42: 275–285.

<sup>472</sup> Lan, Qing, Zhang, L., Li, G., Vermeulen, R., et al. (2004). Hematotoxicity in Workers Exposed to Low Levels of Benzene. Science 306: 1774–1776.

<sup>473</sup> Turtletaub, K.W. and Mani, C. (2003). Benzene metabolism in rodents at doses relevant to human exposure from Urban Air. Research Reports Health Effect Inst. Report No.113.

<sup>474</sup> U.S. Agency for Toxic Substances and Disease Registry (ATSDR). (2007). Toxicological profile for benzene. Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service. <http://www.atsdr.cdc.gov/ToxProfiles/tp3.pdf>.

<sup>475</sup> A minimal risk level (MRL) is defined as an estimate of the daily human exposure to a hazardous substance that is likely to be without appreciable risk of adverse noncancer health effects over a specified duration of exposure.

<sup>476</sup> U.S. EPA. (2002). Health Assessment of 1,3-Butadiene. Office of Research and Development, National Center for Environmental Assessment,

Washington Office, Washington, DC. Report No. EPA600–P–98–001F. This document is available electronically at <http://www.epa.gov/iris/supdocs/buta-sup.pdf>.

<sup>477</sup> U.S. EPA. (2002). “Full IRIS Summary for 1,3-butadiene (CASRN 106–99–0)” Environmental Protection Agency, Integrated Risk Information System (IRIS), Research and Development, National Center for Environmental Assessment, Washington, DC <http://www.epa.gov/iris/subst/0139.htm>.

<sup>478</sup> International Agency for Research on Cancer (IARC). (1999). Monographs on the evaluation of carcinogenic risk of chemicals to humans, Volume 71, Re-evaluation of some organic chemicals, hydrazine and hydrogen peroxide and Volume 97 (in preparation), World Health Organization, Lyon, France.

<sup>479</sup> International Agency for Research on Cancer (IARC). (2008). Monographs on the evaluation of carcinogenic risk of chemicals to humans, 1,3-Butadiene, Ethylene Oxide and Vinyl Halides (Vinyl Fluoride, Vinyl Chloride and Vinyl Bromide) Volume 97, World Health Organization, Lyon, France.

<sup>480</sup> NTP. (2014). 13th Report on Carcinogens. Research Triangle Park, NC: U.S. Department of Health and Human Services, Public Health Service, National Toxicology Program.

<sup>481</sup> U.S. EPA. (2002). “Full IRIS Summary for 1,3-butadiene (CASRN 106–99–0)” Environmental Protection Agency, Integrated Risk Information System (IRIS), Research and Development, National Center for Environmental Assessment, Washington, DC <http://www.epa.gov/iris/subst/0139.htm>.

<sup>482</sup> Bevan, C.; Stadler, J.C.; Elliot, G.S.; et al. (1996). Subchronic toxicity of 4-vinylcyclohexene in rats and mice by inhalation. Fundam. Appl. Toxicol. 32:1–10.

<sup>483</sup> EPA. Integrated Risk Information System. Formaldehyde (CASRN 50–00–0) <http://www.epa.gov/iris/subst/0419.htm>.

<sup>484</sup> NTP. (2014). 13th Report on Carcinogens. Research Triangle Park, NC: U.S. Department of Health and Human Services, Public Health Service, National Toxicology Program.

<sup>485</sup> IARC Monographs on the Evaluation of Carcinogenic Risks to Humans Volume 100F (2012): Formaldehyde.

<sup>486</sup> Hauptmann, M.; Lubin, J.H.; Stewart, P.A.; Hayes, R.B.; Blair, A. 2003. Mortality from lymphohematopoietic malignancies among workers in formaldehyde industries. Journal of the National Cancer Institute 95: 1615–1623.

<sup>487</sup> Hauptmann, M.; Lubin, J.H.; Stewart, P.A.; Hayes, R.B.; Blair, A. 2004. Mortality from solid cancers among workers in formaldehyde industries. American Journal of Epidemiology 159: 1117–1130.

<sup>488</sup> Beane Freeman, L.E.; Blair, A.; Lubin, J.H.; Stewart, P.A.; Hayes, R.B.; Hoover, R.N.; Hauptmann, M. 2009. Mortality from lymph hematopoietic malignancies among workers in formaldehyde industries: The National Cancer Institute cohort. J. National Cancer Inst. 101: 751–761.

<sup>489</sup> Pinkerton, L.E. 2004. Mortality among a cohort of garment workers exposed to formaldehyde: An update. Occup. Environ. Med. 61: 193–200.

<sup>490</sup> Coggon, D., E.C. Harris, J. Poole, K.T. Palmer. 2003. Extended follow-up of a cohort of British chemical workers exposed to formaldehyde. J. National Cancer Inst. 95:1608–1615.

<sup>491</sup> Hauptmann, M.; Stewart, P.A.; Lubin, J.H.; Beane Freeman, L.E.; Hornung, R.W.; Herrick, R.F.; Hoover, R.N.; Fraumeni, J.F.; Hayes, R.B. 2009. Mortality from lymph hematopoietic malignancies

Continued

Health effects of formaldehyde in addition to cancer were reviewed by the Agency for Toxic Substances and Disease Registry in 1999<sup>492</sup> and supplemented in 2010,<sup>493</sup> and by the World Health Organization.<sup>494</sup> These organizations reviewed the scientific literature concerning health effects linked to formaldehyde exposure to evaluate hazards and dose response relationships and defined exposure concentrations for minimal risk levels (MRLs). The health endpoints reviewed included sensory irritation of eyes and respiratory tract, pulmonary function, nasal histopathology, and immune system effects. In addition, research on reproductive and developmental effects and neurological effects were discussed along with several studies that suggest that formaldehyde may increase the risk of asthma—particularly in the young.

EPA released a draft Toxicological Review of Formaldehyde—Inhalation Assessment through the IRIS program for peer review by the National Research Council (NRC) and public comment in June 2010.<sup>495</sup> The draft assessment reviewed more recent research from animal and human studies on cancer and other health effects. The NRC released their review report in April 2011.<sup>496</sup> EPA is currently developing a new draft assessment in response to this review.

#### (e) Acetaldehyde

Acetaldehyde is classified in EPA's IRIS database as a probable human carcinogen, based on nasal tumors in rats, and is considered toxic by the inhalation, oral, and intravenous routes.<sup>497</sup> The URE in IRIS for

acetaldehyde is  $2.2 \times 10^{-6}$  per  $\mu\text{g}/\text{m}^3$ .<sup>498</sup> Acetaldehyde is reasonably anticipated to be a human carcinogen by the U.S. DHHS in the 13th Report on Carcinogens and is classified as possibly carcinogenic to humans (Group 2B) by the IARC.<sup>499</sup> EPA is currently conducting a reassessment of cancer risk from inhalation exposure to acetaldehyde.

The primary noncancer effects of exposure to acetaldehyde vapors include irritation of the eyes, skin, and respiratory tract.<sup>501</sup> In short-term (4 week) rat studies, degeneration of olfactory epithelium was observed at various concentration levels of acetaldehyde exposure.<sup>502</sup> Data from these studies were used by EPA to develop an inhalation reference concentration of  $9 \mu\text{g}/\text{m}^3$ . Some asthmatics have been shown to be a sensitive subpopulation to decrements in functional expiratory volume (FEV1 test) and bronchoconstriction upon acetaldehyde inhalation.<sup>504</sup> The agency is currently conducting a reassessment of the health hazards from inhalation exposure to acetaldehyde.

#### (f) Acrolein

EPA most recently evaluated the toxicological and health effects literature related to acrolein in 2003 and concluded that the human carcinogenic potential of acrolein could not be determined because the available data were inadequate. No information was available on the carcinogenic effects of acrolein in humans and the animal data

provided inadequate evidence of carcinogenicity.<sup>505</sup> The IARC determined in 1995 that acrolein was not classifiable as to its carcinogenicity in humans.<sup>506</sup>

Lesions to the lungs and upper respiratory tract of rats, rabbits, and hamsters have been observed after subchronic exposure to acrolein.<sup>507</sup> The agency has developed an RfC for acrolein of  $0.02 \mu\text{g}/\text{m}^3$  and an RfD of  $0.5 \mu\text{g}/\text{kg}\text{-day}$ .<sup>508</sup> EPA is considering updating the acrolein assessment with data that have become available since the 2003 assessment was completed.

Acrolein is extremely acrid and irritating to humans when inhaled, with acute exposure resulting in upper respiratory tract irritation, mucus hypersecretion and congestion. The intense irritancy of this carbonyl has been demonstrated during controlled tests in human subjects, who suffer intolerable eye and nasal mucosal sensory reactions within minutes of exposure.<sup>509</sup> These data and additional studies regarding acute effects of human exposure to acrolein are summarized in EPA's 2003 IRIS Human Health Assessment for acrolein.<sup>510</sup> Studies in humans indicate that levels as low as 0.09 ppm ( $0.21 \text{ mg}/\text{m}^3$ ) for five minutes may elicit subjective complaints of eye irritation with increasing concentrations leading to more extensive eye, nose and respiratory symptoms. Acute exposures in animal studies report bronchial

and brain cancer among embalmers exposed to formaldehyde. *Journal of the National Cancer Institute* 101:1696–1708.

<sup>492</sup> ATSDR. 1999. Toxicological Profile for Formaldehyde, U.S. Department of Health and Human Services (HHS), July 1999.

<sup>493</sup> ATSDR. 2010. Addendum to the Toxicological Profile for Formaldehyde. U.S. Department of Health and Human Services (HHS), October 2010.

<sup>494</sup> IPCS. 2002. Concise International Chemical Assessment Document 40. Formaldehyde. World Health Organization.

<sup>495</sup> EPA (U.S. Environmental Protection Agency). 2010. Toxicological Review of Formaldehyde (CAS No. 50–00–0)—Inhalation Assessment: In Support of Summary Information on the Integrated Risk Information System (IRIS). External Review Draft. EPA/635/R–10/002A. U.S. Environmental Protection Agency, Washington, DC [online]. Available: [http://cfpub.epa.gov/ncea/irs\\_drats/recordisplay.cfm?deid=223614](http://cfpub.epa.gov/ncea/irs_drats/recordisplay.cfm?deid=223614).

<sup>496</sup> NRC (National Research Council). 2011. Review of the Environmental Protection Agency's Draft IRIS Assessment of Formaldehyde. Washington DC: National Academies Press. [http://books.nap.edu/openbook.php?record\\_id=13142](http://books.nap.edu/openbook.php?record_id=13142).

<sup>497</sup> U.S. EPA (1991). Integrated Risk Information System File of Acetaldehyde. Research and Development, National Center for Environmental Assessment, Washington, DC. This material is

available electronically at <http://www.epa.gov/iris/subst/0290.htm>.

<sup>498</sup> U.S. EPA (1991). Integrated Risk Information System File of Acetaldehyde. This material is available electronically at <http://www.epa.gov/iris/subst/0290.htm>.

<sup>499</sup> NTP. (2014). 13th Report on Carcinogens. Research Triangle Park, NC: U.S. Department of Health and Human Services, Public Health Service, National Toxicology Program.

<sup>500</sup> International Agency for Research on Cancer (IARC). (1999). Re-evaluation of some organic chemicals, hydrazine, and hydrogen peroxide. IARC Monographs on the Evaluation of Carcinogenic Risk of Chemical to Humans, Vol 71. Lyon, France.

<sup>501</sup> U.S. EPA (1991). Integrated Risk Information System File of Acetaldehyde. This material is available electronically at <http://www.epa.gov/iris/subst/0290.htm>.

<sup>502</sup> U.S. EPA. (2003). Integrated Risk Information System File of Acrolein. Research and Development, National Center for Environmental Assessment, Washington, DC. This material is available electronically at <http://www.epa.gov/iris/subst/0364.htm>.

<sup>503</sup> Appleman, L.M., R.A. Woutersen, and V.J. Feron. (1982). Inhalation toxicity of acetaldehyde in rats. I. Acute and subacute studies. *Toxicology*. 23: 293–297.

<sup>504</sup> Myou, S.; Fujimura, M.; Nishi K.; Ohka, T.; and Matsuda, T. (1993) Aerosolized acetaldehyde induces histamine-mediated bronchoconstriction in asthmatics. *Am. Rev. Respir. Dis.* 148(4 Pt 1): 940–943.

<sup>505</sup> U.S. EPA. (2003). Integrated Risk Information System File of Acrolein. Research and Development, National Center for Environmental Assessment, Washington, DC. This material is available at <http://www.epa.gov/iris/subst/0364.htm>.

<sup>506</sup> International Agency for Research on Cancer (IARC). (1995). Monographs on the evaluation of carcinogenic risk of chemicals to humans, Volume 63. Dry cleaning, some chlorinated solvents and other industrial chemicals, World Health Organization, Lyon, France.

<sup>507</sup> U.S. EPA. (2003). Integrated Risk Information System File of Acrolein. Office of Research and Development, National Center for Environmental Assessment, Washington, DC. This material is available at <http://www.epa.gov/iris/subst/0364.htm>.

<sup>508</sup> U.S. EPA. (2003). Integrated Risk Information System File of Acrolein. Office of Research and Development, National Center for Environmental Assessment, Washington, DC. This material is available at <http://www.epa.gov/iris/subst/0364.htm>.

<sup>509</sup> U.S. EPA. (2003) Toxicological review of acrolein in support of summary information on Integrated Risk Information System (IRIS) National Center for Environmental Assessment, Washington, DC. EPA/635/R–03/003. p. 10. Available online at: <http://www.epa.gov/ncea/iris/toxreviews/0364tr.pdf>.

<sup>510</sup> U.S. EPA. (2003) Toxicological review of acrolein in support of summary information on Integrated Risk Information System (IRIS) National Center for Environmental Assessment, Washington, DC. EPA/635/R–03/003. Available online at: <http://www.epa.gov/ncea/iris/toxreviews/0364tr.pdf>.

hyper-responsiveness. Based on animal data (more pronounced respiratory irritancy in mice with allergic airway disease in comparison to non-diseased mice<sup>511</sup>) and demonstration of similar effects in humans (e.g., reduction in respiratory rate), individuals with compromised respiratory function (e.g., emphysema, asthma) are expected to be at increased risk of developing adverse responses to strong respiratory irritants such as acrolein. EPA does not currently have an acute reference concentration for acrolein. The available health effect reference values for acrolein have been summarized by EPA and include an ATSDR MRL for acute exposure to acrolein of 7 µg/m<sup>3</sup> for 1–14 days exposure; and Reference Exposure Level (REL) values from the California Office of Environmental Health Hazard Assessment (OEHHA) for one-hour and 8-hour exposures of 2.5 µg/m<sup>3</sup> and 0.7 µg/m<sup>3</sup>, respectively.<sup>512</sup>

#### (g) Polycyclic Organic Matter

The term polycyclic organic matter (POM) defines a broad class of compounds that includes the polycyclic aromatic hydrocarbon compounds (PAHs). One of these compounds, naphthalene, is discussed separately below. POM compounds are formed primarily from combustion and are present in the atmosphere in gas and particulate form. Cancer is the major concern from exposure to POM. Epidemiologic studies have reported an increase in lung cancer in humans exposed to diesel exhaust, coke oven emissions, roofing tar emissions, and cigarette smoke; all of these mixtures contain POM compounds.<sup>513 514</sup> Animal studies have reported respiratory tract tumors from inhalation exposure to benzo[a]pyrene and alimentary tract and liver tumors from oral exposure to

benzo[a]pyrene.<sup>515</sup> In 1997 EPA classified seven PAHs (benzo[a]pyrene, benz[a]anthracene, chrysene, benzo[b]fluoranthene, benzo[k]fluoranthene, dibenz[a,h]anthracene, and indeno[1,2,3-cd]pyrene) as Group B2, probable human carcinogens.<sup>516</sup> Since that time, studies have found that maternal exposures to PAHs in a population of pregnant women were associated with several adverse birth outcomes, including low birth weight and reduced length at birth, as well as impaired cognitive development in preschool children (3 years of age).<sup>517 518</sup> These and similar studies are being evaluated as a part of the ongoing IRIS assessment of health effects associated with exposure to benzo[a]pyrene.

#### (h) Naphthalene

Naphthalene is found in small quantities in gasoline and diesel fuels. Naphthalene emissions have been measured in larger quantities in both gasoline and diesel exhaust compared with evaporative emissions from mobile sources, indicating it is primarily a product of combustion. Acute (short-term) exposure of humans to naphthalene by inhalation, ingestion, or dermal contact is associated with hemolytic anemia and damage to the liver and the nervous system.<sup>519</sup> Chronic (long term) exposure of workers and rodents to naphthalene has been reported to cause cataracts and retinal damage.<sup>520</sup> EPA released an external

review draft of a reassessment of the inhalation carcinogenicity of naphthalene based on a number of recent animal carcinogenicity studies.<sup>521</sup> The draft reassessment completed external peer review.<sup>522</sup> Based on external peer review comments received, a revised draft assessment that considers all routes of exposure, as well as cancer and noncancer effects, is under development. The external review draft does not represent official agency opinion and was released solely for the purposes of external peer review and public comment. The National Toxicology Program listed naphthalene as “reasonably anticipated to be a human carcinogen” in 2004 on the basis of bioassays reporting clear evidence of carcinogenicity in rats and some evidence of carcinogenicity in mice.<sup>523</sup> California EPA has released a new risk assessment for naphthalene, and the IARC has reevaluated naphthalene and re-classified it as Group 2B: Possibly carcinogenic to humans.<sup>524</sup>

Naphthalene also causes a number of chronic non-cancer effects in animals, including abnormal cell changes and growth in respiratory and nasal tissues.<sup>525</sup> The current EPA IRIS assessment includes noncancer data on hyperplasia and metaplasia in nasal tissue that form the basis of the inhalation RfC of 3 µg/m<sup>3</sup>.<sup>526</sup> The

Assessment, Washington, DC. This material is available electronically at <http://www.epa.gov/iris/subst/0436.htm>.

<sup>521</sup> U.S. EPA. (1998). Toxicological Review of Naphthalene (Reassessment of the Inhalation Cancer Risk), Environmental Protection Agency, Integrated Risk Information System, Research and Development, National Center for Environmental Assessment, Washington, DC. This material is available electronically at <http://www.epa.gov/iris/subst/0436.htm>.

<sup>522</sup> Oak Ridge Institute for Science and Education. (2004). External Peer Review for the IRIS Reassessment of the Inhalation Carcinogenicity of Naphthalene. August 2004. <http://cfpub.epa.gov/ncea/cfm/recordisplay.cfm?deid=84403>.

<sup>523</sup> NTP. (2014). 13th Report on Carcinogens. U.S. Department of Health and Human Services, Public Health Service, National Toxicology Program.

<sup>524</sup> International Agency for Research on Cancer (IARC). (2002). Monographs on the Evaluation of the Carcinogenic Risk of Chemicals for Humans. Vol. 82. Lyon, France.

<sup>525</sup> U.S. EPA. (1998). Toxicological Review of Naphthalene, Environmental Protection Agency, Integrated Risk Information System, Research and Development, National Center for Environmental Assessment, Washington, DC. This material is available electronically at <http://www.epa.gov/iris/subst/0436.htm>.

<sup>526</sup> U.S. EPA. (1998). Toxicological Review of Naphthalene, Environmental Protection Agency, Integrated Risk Information System (IRIS), Research and Development, National Center for Environmental Assessment, Washington, DC <http://www.epa.gov/iris/subst/0436.htm>.

<sup>511</sup> Morris J.B., Symanowicz P.T., Olsen J.E., et al. (2003). Immediate sensory nerve-mediated respiratory responses to irritants in healthy and allergic airway-diseased mice. *J Appl Physiol* 94(4):1563–1571.

<sup>512</sup> U.S. EPA. (2009). Graphical Arrays of Chemical-Specific Health Effect Reference Values for Inhalation Exposures (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-09/061, 2009. <http://cfpub.epa.gov/ncea/cfm/recordisplay.cfm?deid=211003>.

<sup>513</sup> Agency for Toxic Substances and Disease Registry (ATSDR). (1995). Toxicological profile for Polycyclic Aromatic Hydrocarbons (PAHs). Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service. Available electronically at <http://www.atsdr.cdc.gov/ToxProfiles/TP.asp?id=122&tid=25>.

<sup>514</sup> U.S. EPA. (2002). *Health Assessment Document for Diesel Engine Exhaust*. EPA/600/8-90/057F Office of Research and Development, Washington, DC. <http://cfpub.epa.gov/ncea/cfm/recordisplay.cfm?deid=29060>.

<sup>515</sup> International Agency for Research on Cancer (IARC). (2012). Monographs on the Evaluation of the Carcinogenic Risk of Chemicals for Humans, Chemical Agents and Related Occupations. Vol. 100F. Lyon, France.

<sup>516</sup> U.S. EPA (1997). Integrated Risk Information System File of indeno (1,2,3-cd) pyrene. Research and Development, National Center for Environmental Assessment, Washington, DC. This material is available electronically at <http://www.epa.gov/ncea/iris/subst/0457.htm>.

<sup>517</sup> Perera, F.P.; Rauh, V.; Tsai, W.-Y.; et al. (2002). Effect of transplacental exposure to environmental pollutants on birth outcomes in a multiethnic population. *Environ Health Perspect*. 111: 201–205.

<sup>518</sup> Perera, F.P.; Rauh, V.; Whyatt, R.M.; Tsai, W.Y.; Tang, D.; Diaz, D.; Hoepner, L.; Barr, D.; Tu, Y.H.; Camann, D.; Kinney, P. (2006). Effect of prenatal exposure to airborne polycyclic aromatic hydrocarbons on neurodevelopment in the first 3 years of life among inner-city children. *Environ Health Perspect* 114: 1287–1292.

<sup>519</sup> U.S. EPA. 1998. Toxicological Review of Naphthalene (Reassessment of the Inhalation Cancer Risk), Environmental Protection Agency, Integrated Risk Information System, Research and Development, National Center for Environmental Assessment, Washington, DC. This material is available electronically at <http://www.epa.gov/iris/subst/0436.htm>.

<sup>520</sup> U.S. EPA. 1998. Toxicological Review of Naphthalene (Reassessment of the Inhalation Cancer Risk), Environmental Protection Agency, Integrated Risk Information System, Research and Development, National Center for Environmental

ATSDR MRL for acute exposure to naphthalene is 0.6 mg/kg/day.

#### (i) Other Air Toxics

In addition to the compounds described above, other compounds in gaseous hydrocarbon and PM emissions from motor vehicles will be affected by this action. Mobile source air toxic compounds that will potentially be impacted include ethylbenzene, propionaldehyde, toluene, and xylene. Information regarding the health effects of these compounds can be found in EPA's IRIS database.<sup>527</sup>

#### (8) Exposure and Health Effects Associated With Traffic

Locations in close proximity to major roadways generally have elevated concentrations of many air pollutants emitted from motor vehicles. Hundreds of such studies have been published in peer-reviewed journals, concluding that concentrations of CO, NO, NO<sub>2</sub>, benzene, aldehydes, particulate matter, black carbon, and many other compounds are elevated in ambient air within approximately 300–600 meters (about 1,000–2,000 feet) of major roadways. Highest concentrations of most pollutants emitted directly by motor vehicles are found at locations within 50 meters (about 165 feet) of the edge of a roadway's traffic lanes.

A recent large-scale review of air quality measurements in vicinity of major roadways between 1978 and 2008 concluded that the pollutants with the steepest concentration gradients in vicinities of roadways were CO, ultrafine particles, metals, elemental carbon (EC), NO, NO<sub>x</sub>, and several VOCs.<sup>528</sup> These pollutants showed a large reduction in concentrations within 100 meters downwind of the roadway. Pollutants that showed more gradual reductions with distance from roadways included benzene, NO<sub>2</sub>, PM<sub>2.5</sub>, and PM<sub>10</sub>. In the review article, results varied based on the method of statistical analysis used to determine the trend.

For pollutants with relatively high background concentrations relative to near-road concentrations, detecting concentration gradients can be difficult. For example, many aldehydes have high background concentrations as a result of photochemical breakdown of precursors from many different organic compounds. This can make detection of gradients around roadways and other primary emission sources difficult.

However, several studies have measured aldehydes in multiple weather conditions, and found higher concentrations of many carbonyls downwind of roadways.<sup>529–530</sup> These findings suggest a substantial roadway source of these carbonyls.

In the past 15 years, many studies have been published with results reporting that populations who live, work, or go to school near high-traffic roadways experience higher rates of numerous adverse health effects, compared to populations far away from major roads.<sup>531</sup> In addition, numerous studies have found adverse health effects associated with spending time in traffic, such as commuting or walking along high-traffic roadways.<sup>532–533–534–535</sup> The health outcomes with the strongest evidence linking them with traffic-associated air pollutants are respiratory effects, particularly in asthmatic children, and cardiovascular effects.

Numerous reviews of this body of health literature have been published as well. In 2010, an expert panel of the Health Effects Institute (HEI) published a review of hundreds of exposure, epidemiology, and toxicology studies.<sup>536</sup> The panel rated how the evidence for each type of health outcome supported a conclusion of a causal association with traffic-

associated air pollution as either "sufficient," "suggestive but not sufficient," or "inadequate and insufficient." The panel categorized evidence of a causal association for exacerbation of childhood asthma as "sufficient." The panel categorized evidence of a causal association for new onset asthma as between "sufficient" and as "suggestive but not sufficient." "Suggestive of a causal association" was how the panel categorized evidence linking traffic-associated air pollutants with exacerbation of adult respiratory symptoms and lung function decrement. It categorized as "inadequate and insufficient" evidence of a causal relationship between traffic-related air pollution and health care utilization for respiratory problems, new onset adult asthma, chronic obstructive pulmonary disease (COPD), nonasthmatic respiratory allergy, and cancer in adults and children. Other literature reviews have been published with conclusions generally similar to the HEI panel's.<sup>537–538–539–540</sup> However, researchers from the U.S. Centers for Disease Control and Prevention (CDC) recently published a systematic review and meta-analysis of studies evaluating the risk of childhood leukemia associated with traffic exposure, and reported positive associations between "postnatal" proximity to traffic and leukemia risks, but no such association for "prenatal" exposures.<sup>541</sup>

Health outcomes with few publications suggest the possibility of other effects still lacking sufficient evidence to draw definitive conclusions. Among these outcomes with a small number of positive studies are neurological impacts (e.g., autism and reduced cognitive function) and reproductive outcomes (e.g., preterm birth, low birth weight).<sup>542–543–544–545</sup>

<sup>537</sup> Boothe, V.L.; Shendell, D.G. (2008). Potential health effects associated with residential proximity to freeways and primary roads: Review of scientific literature, 1999–2006. *J Environ Health* 70: 33–41.

<sup>538</sup> Salam, M.T.; Islam, T.; Gilliland, F.D. (2008). Recent evidence for adverse effects of residential proximity to traffic sources on asthma. *Curr Opin Pulm Med* 14: 3–8.

<sup>539</sup> Sun, X.; Zhang, S.; Ma, X. (2014) No association between traffic density and risk of childhood leukemia: A meta-analysis. *Asia Pac J Cancer Prev* 15: 5229–5232.

<sup>540</sup> Raaschou-Nielsen, O.; Reynolds, P. (2006). Air pollution and childhood cancer: A review of the epidemiological literature. *Int J Cancer* 118: 2920–9.

<sup>541</sup> Boothe, V.L.; Boehmer, T.K.; Wendel, A.M.; Yip, F.Y. (2014) Residential traffic exposure and childhood leukemia: A systematic review and meta-analysis. *Am J Prev Med* 46: 413–422.

<sup>542</sup> Volk, H.E.; Hertz-Picciotto, I.; Delwiche, L.; et al. (2011). Residential proximity to freeways and autism in the CHARGE study. *Environ Health Perspect* 119: 873–877.

<sup>527</sup> U.S. EPA Integrated Risk Information System (IRIS) database is available at: [www.epa.gov/iris](http://www.epa.gov/iris).

<sup>528</sup> Karner, A.A.; Eisinger, D.S.; Niemeier, D.A. (2010). Near-roadway air quality: Synthesizing the findings from real-world data. *Environ Sci Technol* 44: 5334–5344.

<sup>529</sup> Liu, W.; Zhang, J.; Kwon, J.I.; et al. (2006). Concentrations and source characteristics of airborne carbonyl compounds measured outside urban residences. *J Air Waste Manage Assoc* 56: 1196–1204.

<sup>530</sup> Cahill, T.M.; Charles, M.J.; Seaman, V.Y. (2010). Development and application of a sensitive method to determine concentrations of acrolein and other carbonyls in ambient air. Health Effects Institute Research Report 149. Available at <http://dx.doi.org>.

<sup>531</sup> In the widely-used PubMed database of health publications, between January 1, 1990 and August 18, 2011, 605 publications contained the keywords "traffic, pollution, epidemiology," with approximately half the studies published after 2007.

<sup>532</sup> Laden, F.; Hart, J.E.; Smith, T.J.; Davis, M.E.; Garshick, E. (2007) Cause-specific mortality in the unionized U.S. trucking industry. *Environmental Health Perspect* 115:1192–1196.

<sup>533</sup> Peters, A.; von Klot, S.; Heier, M.; Trentinaglia, L.; Hörmann, A.; Wichmann, H.E.; Löwel, H. (2004) Exposure to traffic and the onset of myocardial infarction. *New England J Med* 351: 1721–1730.

<sup>534</sup> Zanobetti, A.; Stone, P.H.; Spelzer, F.E.; Schwartz, J.D.; Coull, B.A.; Suh, H.H.; Nearling, B.D.; Mittleman, M.A.; Verrier, R.L.; Gold, D.R. (2009) T-wave alternans, air pollution and traffic in high-risk subjects. *Am J Cardiol* 104: 665–670.

<sup>535</sup> Dubowsky Adar, S.; Adamkiewicz, G.; Gold, D.R.; Schwartz, J.; Coull, B.A.; Suh, H. (2007) Ambient and microenvironmental particles and exhaled nitric oxide before and after a group bus trip. *Environ Health Perspect* 115: 507–512.

<sup>536</sup> Health Effects Institute Panel on the Health Effects of Traffic-Related Air Pollution. (2010). Traffic-related air pollution: A critical review of the literature on emissions, exposure, and health effects. HEI Special Report 17. Available at <http://www.healtheffects.org>.

In addition to health outcomes, particularly cardiopulmonary effects, conclusions of numerous studies suggest mechanisms by which traffic-related air pollution affects health. Numerous studies indicate that near-roadway exposures may increase systemic inflammation, affecting organ systems, including blood vessels and lungs.<sup>546 547 548 549</sup> Long-term exposures in near-road environments have been associated with inflammation-associated conditions, such as atherosclerosis and asthma.<sup>550 551 552</sup>

Several studies suggest that some factors may increase susceptibility to the effects of traffic-associated air pollution. Several studies have found stronger respiratory associations in children experiencing chronic social stress, such as in violent neighborhoods or in homes with high family stress.<sup>553 554 555</sup>

<sup>543</sup> Franco-Suglia, S.; Gryparis, A.; Wright, R.O.; et al. (2007). Association of black carbon with cognition among children in a prospective birth cohort study. *Am J Epidemiol*. doi: 10.1093/aje/kwm308. [Online at <http://dx.doi.org>].

<sup>544</sup> Power, M.C.; Weisskopf, M.G.; Alexeev, S.E.; et al. (2011). Traffic-related air pollution and cognitive function in a cohort of older men. *Environ Health Perspect* 119: 682–687.

<sup>545</sup> Wu, J.; Wilhelm, M.; Chung, J.; et al. (2011). Comparing exposure assessment methods for traffic-related air pollution in an adverse pregnancy outcome study. *Environ Res* 111: 685–6692.

<sup>546</sup> Riediker, M. (2007). Cardiovascular effects of fine particulate matter components in highway patrol officers. *Inhal Toxicol* 19: 99–105. doi: 10.1080/08958370701495238. Available at <http://dx.doi.org>.

<sup>547</sup> Alexeev, S.E.; Coull, B.A.; Gryparis, A.; et al. (2011). Medium-term exposure to traffic-related air pollution and markers of inflammation and endothelial function. *Environ Health Perspect* 119: 481–486. doi:10.1289/ehp.1002560. Available at <http://dx.doi.org>.

<sup>548</sup> Eckel, S.P.; Berhane, K.; Salam, M.T.; et al. (2011). Traffic-related pollution exposure and exhaled nitric oxide in the Children's Health Study. *Environ Health Perspect* (IN PRESS). doi:10.1289/ehp.1103516. Available at <http://dx.doi.org>.

<sup>549</sup> Zhang, J.; McCreanor, J.E.; Cullinan, P.; et al. (2009). Health effects of real-world exposure diesel exhaust in persons with asthma. *Res Rep Health Effects Inst* 138. [Online at <http://www.healtheffects.org>].

<sup>550</sup> Adar, S.D.; Klein, R.; Klein, E.K.; et al. (2010). Air pollution and the microvasculature: A cross-sectional assessment of in vivo retinal images in the population-based Multi-Ethnic Study of Atherosclerosis. *PLoS Med* 7(11): E1000372. doi:10.1371/journal.pmed.1000372. Available at <http://dx.doi.org>.

<sup>551</sup> Kan, H.; Heiss, G.; Rose, K.M.; et al. (2008). Prospective analysis of traffic exposure as a risk factor for incident coronary heart disease: The Atherosclerosis Risk in Communities (ARIC) study. *Environ Health Perspect* 116: 1463–1468. doi:10.1289/ehp.11290. Available at <http://dx.doi.org>.

<sup>552</sup> McConnell, R.; Islam, T.; Shankardass, K.; et al. (2010). Childhood incident asthma and traffic-related air pollution at home and school. *Environ Health Perspect* 1021–1026.

<sup>553</sup> Islam, T.; Urban, R.; Gauderman, W.J.; et al. (2011). Parental stress increases the detrimental

The risks associated with residence, workplace, or schools near major roads are of potentially high public health significance due to the large population in such locations. According to the 2009 American Housing Survey, over 22 million homes (17.0 percent of all U.S. housing units) were located within 300 feet of an airport, railroad, or highway with four or more lanes. This corresponds to a population of more than 50 million U.S. residents in close proximity to high-traffic roadways or other transportation sources. Based on 2010 Census data, a 2013 publication estimated that 19 percent of the U.S. population (over 59 million people) lived within 500 meters of roads with at least 25,000 annual average daily traffic (AADT), while about 3.2 percent of the population lived within 100 meters (about 300 feet) of such roads.<sup>556</sup> Another 2013 study estimated that 3.7 percent of the U.S. population (about 11.3 million people) lived within 150 meters (about 500 feet) of interstate highways, or other freeways and expressways.<sup>557</sup> As discussed in Section VIII. B. (9), on average, populations near major roads have higher fractions of minority residents and lower socioeconomic status. Furthermore, on average, Americans spend more than an hour traveling each day, bringing nearly all residents into a high-exposure microenvironment for part of the day.

In light of these concerns, EPA has required and is working with states to ensure that air quality monitors be placed near high-traffic roadways for determining NAAQS compliance for CO, NO<sub>2</sub>, and PM<sub>2.5</sub> (in addition to those existing monitors located in neighborhoods and other locations farther away from pollution sources). Near-roadway monitors for NO<sub>2</sub> begin operation between 2014 and 2017 in Core Based Statistical Areas (CBSAs) with population of at least 500,000. Monitors for CO and PM<sub>2.5</sub> begin operation between 2015 and 2017.

effect of traffic exposure on children's lung function. *Am J Respir Crit Care Med* (In press).

<sup>554</sup> Clougherty, J.E.; Levy, J.I.; Kubzansky, L.D.; et al. (2007). Synergistic effects of traffic-related air pollution and exposure to violence on urban asthma etiology. *Environ Health Perspect* 115: 1140–1146.

<sup>555</sup> Chen, E.; Schrier, H.M.; Strunk, R.C.; et al. (2008). Chronic traffic-related air pollution and stress interact to predict biologic and clinical outcomes in asthma. *Environ Health Perspect* 116: 970–5.

<sup>556</sup> Rowangould, G.M. (2013) A census of the U.S. near-roadway population: Public health and environmental justice considerations. *Transportation Research Part D* 25: 59–67.

<sup>557</sup> Boehmer, T.K.; Foster, S.L.; Henry, J.R.; Woghiren-Akinnifesi, E.L.; Yip, F.Y. (2013) Residential proximity to major highways—United States, 2010. *Morbidity and Mortality Weekly Report* 62(3): 46–50.

These monitors will further our understanding of exposure in these locations.

EPA and DOT continue to research near-road air quality, including the types of pollutants found in high concentrations near major roads and health problems associated with the mixture of pollutants near roads.

#### (9) Environmental Justice

Environmental justice (EJ) is a principle asserting that all people deserve fair treatment and meaningful involvement with respect to environmental laws, regulations, and policies. EPA seeks to provide the same degree of protection from environmental health hazards for all people. DOT shares this goal and is informed about the potential environmental impacts of its rulemakings through its NEPA process (see NHTSA's DEIS). As referenced below, numerous studies have found that some environmental hazards are more prevalent in areas where racial/ethnic minorities and people with low socioeconomic status (SES), represent a higher fraction of the population compared with the general population.

As discussed in Section VIII. B. (8) of this document and NHTSA's DEIS, concentrations of many air pollutants are elevated near high-traffic roadways. If minority populations and low-income populations disproportionately live near such roads, then an issue of EJ may be present. We reviewed existing scholarly literature examining the potential for disproportionate exposure among minorities and people with low SES and we conducted our own evaluation of two national datasets: The U.S. Census Bureau's American Housing Survey for calendar year 2009 and the U.S. Department of Education's database of school locations.

Publications that address EJ issues generally report that populations living near major roadways (and other types of transportation infrastructure) tend to be composed of larger fractions of nonwhite residents. People living in neighborhoods near such sources of air pollution also tend to be lower in income than people living elsewhere. Numerous studies evaluating the demographics and socioeconomic status of populations or schools near roadways have found that they include a greater percentage of minority residents, as well as lower SES (indicated by variables such as median household income). Locations in these studies include Los Angeles, CA; Seattle, WA; Wayne County, MI; Orange County, FL; and the



State of California<sup>558</sup> 559 560 561 562 563  
Such disparities may be due to multiple factors.<sup>564</sup>

People with low SES often live in neighborhoods with multiple stressors and health risk factors, including reduced health insurance coverage rates, higher smoking and drug use rates, limited access to fresh food, visible neighborhood violence, and elevated rates of obesity and some diseases such as asthma, diabetes, and ischemic heart disease. Although questions remain, several studies find stronger associations between air pollution and health in locations with such chronic neighborhood stress, suggesting that populations in these areas may be more susceptible to the effects of air pollution.<sup>565</sup> 566 567 568 Household-level stressors such as parental smoking and

relationship stress also may increase susceptibility to the adverse effects of air pollution.<sup>569</sup> 570

More recently, three publications report nationwide analyses that compare the demographic patterns of people who do or do not live near major roadways.<sup>571</sup> 572 573 All three of these studies found that people living near major roadways are more likely to be minorities or low in SES. They also found that the outcomes of their analyses varied between regions within the U.S. However, only one such study looked at whether such conclusions were confounded by living in a location with higher population density and how demographics differ between locations nationwide. In general, it found that higher density areas have higher proportions of low income and minority residents.

We analyzed two national databases that allowed us to evaluate whether homes and schools were located near a major road and whether disparities in exposure may be occurring in these environments. The American Housing Survey (AHS) includes descriptive statistics of over 70,000 housing units across the nation. The study survey is conducted every two years by the U.S. Census Bureau. The second database we analyzed was the U.S. Department of Education's Common Core of Data, which includes enrollment and location information for schools across the U.S.

In analyzing the 2009 AHS, we focused on whether or not a housing unit was located within 300 feet of "4-or-more lane highway, railroad, or airport."<sup>574</sup> We analyzed whether there

were differences between households in such locations compared with those in locations farther from these transportation facilities.<sup>575</sup> We included other variables, such as land use category, region of country, and housing type. We found that homes with a nonwhite householder were 22–34 percent more likely to be located within 300 feet of these large transportation facilities than homes with white householders. Homes with a Hispanic householder were 17–33 percent more likely to be located within 300 feet of these large transportation facilities than homes with non-Hispanic householders. Households near large transportation facilities were, on average, lower in income and educational attainment, more likely to be a rental property and located in an urban area compared with households more distant from transportation facilities.

In examining schools near major roadways, we examined the Common Core of Data (CCD) from the U.S. Department of Education, which includes information on all public elementary and secondary schools and school districts nationwide.<sup>576</sup> To determine school proximities to major roadways, we used a geographic information system (GIS) to map each school and roadways based on the U.S. Census's TIGER roadway file.<sup>577</sup> We found that minority students were overrepresented at schools within 200 meters of the largest roadways, and that schools within 200 meters of the largest roadways also had higher than expected numbers of students eligible for free or reduced-price lunches. For example, Black students represent 22 percent of students at schools located within 200 meters of a primary road, whereas Black students represent 17 percent of students in all U.S. schools. Hispanic students represent 30 percent of students at schools located within 200 meters of a primary road, whereas Hispanic students represent 22 percent of students in all U.S. schools.

Overall, there is substantial evidence that people who live or attend school near major roadways are more likely to be of a minority race, Hispanic

<sup>558</sup> Marshall, J.D. (2008) Environmental inequality: Air pollution exposures in California's South Coast Air Basin.

<sup>559</sup> Su, J.G.; Larson, T.; Gould, T.; Cohen, M.; Buzzelli, M. (2010) Transboundary air pollution and environmental justice: Vancouver and Seattle compared. *GeoJournal* 57: 595–608. doi:10.1007/s10708-009-9269-6 [Online at <http://dx.doi.org>].

<sup>560</sup> Chakraborty, J.; Zandbergen, P.A. (2007) Children at risk: Measuring racial/ethnic disparities in potential exposure to air pollution at school and home. *J Epidemiol Community Health* 61: 1074–1079. doi: 10.1136/jech.2006.054130 [Online at <http://dx.doi.org>].

<sup>561</sup> Green, R.S.; Smorodinsky, S.; Kim, J.J.; McLaughlin, R.; Ostro, B. (2003) Proximity of California public schools to busy roads. *Environ Health Perspect* 112: 61–66. doi:10.1289/ehp.6566 [<http://dx.doi.org>].

<sup>562</sup> Wu, Y.; Batterman, S.A. (2006) Proximity of schools in Detroit, Michigan to automobile and truck traffic. *J Exposure Sci & Environ Epidemiol*. doi:10.1038/sj.jes.7500484 [Online at <http://dx.doi.org>].

<sup>563</sup> Su, J.G.; Jerrett, M.; de Nazelle, A.; Wolch, J. (2011) Does exposure to air pollution in urban parks have socioeconomic, racial, or ethnic gradients? *Environ Res* 111: 319–328.

<sup>564</sup> Depro, B.; Timmins, C. (2008) Mobility and environmental equity: Do housing choices determine exposure to air pollution? North Carolina State University Center for Environmental and Resource Economic Policy.

<sup>565</sup> Clougherty, J.E.; Kubzansky, L.D. (2009) A framework for examining social stress and susceptibility to air pollution in respiratory health. *Environ Health Perspect* 117: 1351–1358. doi:10.1289/ehp.0900612 [Online at <http://dx.doi.org>].

<sup>566</sup> Clougherty, J.E.; Levy, J.I.; Kubzansky, L.D.; Ryan, P.B.; Franco Suglia, S.; Jacobson Canner, M.; Wright, R.J. (2007) Synergistic effects of traffic-related air pollution and exposure to violence on urban asthma etiology. *Environ Health Perspect* 115: 1140–1146. doi:10.1289/ehp.9863 [Online at <http://dx.doi.org>].

<sup>567</sup> Finkelstein, M.M.; Jerrett, M.; DeLuca, P.; Finkelstein, N.; Verma, D.K.; Chapman, K.; Sears, M.R. (2003) Relation between income, air pollution and mortality: a cohort study. *Canadian Med Assn J* 169: 397–402.

<sup>568</sup> Shankardass, K.; McConnell, R.; Jerrett, M.; Milam, J.; Richardson, J.; Berhane, K. (2009) Parental stress increases the effect of traffic-related air pollution on childhood asthma incidence. *Proc Natl Acad Sci* 106: 12406–12411. doi:10.1073/pnas.0812910106 [Online at <http://dx.doi.org>].

<sup>569</sup> Lewis, A.S.; Sax, S.N.; Wason, S.C.; Campleman, S.L. (2011) Non-chemical stressors and cumulative risk assessment: an overview of current initiatives and potential air pollutant interactions. *Int J Environ Res Public Health* 8: 2020–2073. doi:10.3390/ijerph8062020 [Online at <http://dx.doi.org>].

<sup>570</sup> Rosa, M.J.; Jung, K.H.; Perzanowski, M.S.; Kelvin, E.A.; Darling, K.W.; Camann, D.E.; Chillrud, S.N.; Whyatt, R.M.; Kinney, P.L.; Perera, F.P.; Miller, R.L. (2010) Prenatal exposure to polycyclic aromatic hydrocarbons, environmental tobacco smoke and asthma. *Respir Med* (In press). doi:10.1016/j.rmed.2010.11.022 [Online at <http://dx.doi.org>].

<sup>571</sup> Rowangould, G.M. (2013) A census of the U.S. near-roadway population: public health and environmental justice considerations. *Transportation Research Part D*: 59–67.

<sup>572</sup> Tian, N.; Xue, J.; Barzyk, T.M. (2013) Evaluating socioeconomic and racial differences in traffic-related metrics in the United States using a GIS approach. *J Exposure Sci Environ Epidemiol* 23: 215–222.

<sup>573</sup> Boehmer, T.K.; Foster, S.L.; Henry, J.R.; Woghiren-Akinnifesi, E.L.; Yip, F.Y. (2013) Residential proximity to major highways—United States, 2010. *Morbidity and Mortality Weekly Report* 62(3): 46–50.

<sup>574</sup> This variable primarily represents roadway proximity. According to the Central Intelligence

Agency's World Factbook, in 2010, the United States had 6,506,204 km or roadways, 224,792 km of railways, and 15,079 airports. Highways thus represent the overwhelming majority of transportation facilities described by this factor in the AHS.

<sup>575</sup> Bailey, C. (2011) Demographic and Social Patterns in Housing Units Near Large Highways and other Transportation Sources. Memorandum to docket.

<sup>576</sup> <http://nces.ed.gov/ccd/>.

<sup>577</sup> Pedde, M.; Bailey, C. (2011) Identification of Schools within 200 Meters of U.S. Primary and Secondary Roads. Memorandum to the docket.

ethnicity, and/or low SES. The emission reductions from these proposed rules would likely result in widespread air quality improvements, but the impact on pollution levels in close proximity to roadways would be most direct. Thus, these proposed rules would likely help in mitigating the disparity in racial, ethnic, and economically-based exposures.

### *C. Environmental Effects of Non-GHG Pollutants*

#### (1) Visibility

Visibility can be defined as the degree to which the atmosphere is transparent to visible light.<sup>578</sup> Visibility impairment is caused by light scattering and absorption by suspended particles and gases. Visibility is important because it has direct significance to people's enjoyment of daily activities in all parts of the country. Individuals value good visibility for the well-being it provides them directly, where they live and work, and in places where they enjoy recreational opportunities. Visibility is also highly valued in significant natural areas, such as national parks and wilderness areas, and special emphasis is given to protecting visibility in these areas. For more information on visibility see the final 2009 p.m. ISA.<sup>579</sup>

EPA is working to address visibility impairment. Reductions in air pollution from implementation of various programs associated with the Clean Air Act Amendments of 1990 (CAAA) provisions have resulted in substantial improvements in visibility, and will continue to do so in the future. Because trends in haze are closely associated with trends in particulate sulfate and nitrate due to the simple relationship between their concentration and light extinction, visibility trends have improved as emissions of SO<sub>2</sub> and NO<sub>x</sub> have decreased over time due to air pollution regulations such as the Acid Rain Program.<sup>580</sup>

In the Clean Air Act Amendments of 1977, Congress recognized visibility's value to society by establishing a

national goal to protect national parks and wilderness areas from visibility impairment caused by manmade pollution.<sup>581</sup> In 1999, EPA finalized the regional haze program to protect the visibility in Mandatory Class I Federal areas.<sup>582</sup> There are 156 national parks, forests and wilderness areas categorized as Mandatory Class I Federal areas.<sup>583</sup> These areas are defined in CAA Section 162 as those national parks exceeding 6,000 acres, wilderness areas and memorial parks exceeding 5,000 acres, and all international parks which were in existence on August 7, 1977.

EPA has also concluded that PM<sub>2.5</sub> causes adverse effects on visibility in other areas that are not protected by the Regional Haze Rule, depending on PM<sub>2.5</sub> concentrations and other factors such as dry chemical composition and relative humidity (*i.e.*, an indicator of the water composition of the particles). EPA revised the PM<sub>2.5</sub> standards in December 2012 and established a target level of protection that is expected to be met through attainment of the existing secondary standards for PM<sub>2.5</sub>.

#### (2) Plant and Ecosystem Effects of Ozone

The welfare effects of ozone can be observed across a variety of scales, *i.e.* subcellular, cellular, leaf, whole plant, population and ecosystem. Ozone effects that begin at small spatial scales, such as the leaf of an individual plant, when they occur at sufficient magnitudes (or to a sufficient degree) can result in effects being propagated along a continuum to larger and larger spatial scales. For example, effects at the individual plant level, such as altered rates of leaf gas exchange, growth and reproduction can, when widespread, result in broad changes in ecosystems, such as productivity, carbon storage, water cycling, nutrient cycling, and community composition.

Ozone can produce both acute and chronic injury in sensitive species depending on the concentration level and the duration of the exposure.<sup>584</sup> In those sensitive species,<sup>585</sup> effects from repeated exposure to ozone throughout the growing season of the plant tend to accumulate, so that even low concentrations experienced for a longer duration have the potential to create

chronic stress on vegetation.<sup>586</sup> Ozone damage to sensitive species includes impaired photosynthesis and visible injury to leaves. The impairment of photosynthesis, the process by which the plant makes carbohydrates (its source of energy and food), can lead to reduced crop yields, timber production, and plant productivity and growth. Impaired photosynthesis can also lead to a reduction in root growth and carbohydrate storage below ground, resulting in other, more subtle plant and ecosystems impacts.<sup>587</sup> These latter impacts include increased susceptibility of plants to insect attack, disease, harsh weather, interspecies competition and overall decreased plant vigor. The adverse effects of ozone on areas with sensitive species could potentially lead to species shifts and loss from the affected ecosystems,<sup>588</sup> resulting in a loss or reduction in associated ecosystem goods and services. Additionally, visible ozone injury to leaves can result in a loss of aesthetic value in areas of special scenic significance like national parks and wilderness areas and reduced use of sensitive ornamentals in landscaping.<sup>589</sup>

The Integrated Science Assessment (ISA) for Ozone presents more detailed information on how ozone effects vegetation and ecosystems.<sup>590</sup> The ISA concludes that ambient concentrations of ozone are associated with a number of adverse welfare effects and characterizes the weight of evidence for different effects associated with ozone.<sup>591</sup> The ISA concludes that visible foliar injury effects on vegetation,

<sup>586</sup> The concentration at which ozone levels overwhelm a plant's ability to detoxify or compensate for oxidant exposure varies. Thus, whether a plant is classified as sensitive or tolerant depends in part on the exposure levels being considered. Chapter 9, Section 9.3.4 of U.S. EPA, 2013 Integrated Science Assessment for Ozone and Related Photochemical Oxidants. Office of Research and Development/National Center for Environmental Assessment. U.S. Environmental Protection Agency. EPA 600/R-10/076F.

<sup>587</sup> 73 FR 16492, March 27, 2008.

<sup>588</sup> 73 FR 16493-16494, March 27, 2008, Ozone impacts could be occurring in areas where plant species sensitive to ozone have not yet been studied or identified.

<sup>589</sup> 73 FR 16490-16497, March 27, 2008.

<sup>590</sup> U.S. EPA. Integrated Science Assessment of Ozone and Related Photochemical Oxidants (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-10/076F, 2013. The ISA is available at <http://cfpub.epa.gov/ncea/isa/recordisplay.cfm?deid=247492#Download>.

<sup>591</sup> The Ozone ISA evaluates the evidence associated with different ozone related health and welfare effects, assigning one of five "weight of evidence" determinations: causal relationship, likely to be a causal relationship, suggestive of a causal relationship, inadequate to infer a causal relationship, and not likely to be a causal relationship. For more information on these levels of evidence, please refer to Table II of the ISA.

<sup>578</sup> National Research Council, (1993). Protecting Visibility in National Parks and Wilderness Areas. National Academy of Sciences Committee on Haze in National Parks and Wilderness Areas. National Academy Press, Washington, DC. This book can be viewed on the National Academy Press Web site at <http://www.nap.edu/books/0309048443/html/>.

<sup>579</sup> U.S. EPA. (2009). Integrated Science Assessment for Particulate Matter (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R-08/139F.

<sup>580</sup> U.S. Environmental Protection Agency (U.S. EPA). 2009. Integrated Science Assessment for Particulate Matter (Final Report). EPA-600-R-08-139F. National Center for Environmental Assessment—RTP Division. December. Available on the Internet at <http://cfpub.epa.gov/ncea/cfm/recordisplay.cfm?deid=216546>.

<sup>581</sup> See Section 169(a) of the Clean Air Act.

<sup>582</sup> 64 FR 35714, July 1, 1999.

<sup>583</sup> 62 FR 38680-38681, July 18, 1997.

<sup>584</sup> 73 FR 16486, March 27, 2008.

<sup>585</sup> 73 FR 16491, March 27, 2008. Only a small percentage of all the plant species growing within the U.S. (over 43,000 species have been catalogued in the USDA PLANTS database) have been studied with respect to ozone sensitivity.



reduced vegetation growth, reduced productivity in terrestrial ecosystems, reduced yield and quality of agricultural crops, and alteration of below-ground biogeochemical cycles are causally associated with exposure to ozone. It also concludes that reduced carbon sequestration in terrestrial ecosystems, alteration of terrestrial ecosystem water cycling, and alteration of terrestrial community composition are likely to be causally associated with exposure to ozone.

### (3) Atmospheric Deposition

Wet and dry deposition of ambient particulate matter delivers a complex mixture of metals (e.g., mercury, zinc, lead, nickel, aluminum, and cadmium), organic compounds (e.g., polycyclic organic matter, dioxins, and furans) and inorganic compounds (e.g., nitrate, sulfate) to terrestrial and aquatic ecosystems. The chemical form of the compounds deposited depends on a variety of factors including ambient conditions (e.g., temperature, humidity, oxidant levels) and the sources of the material. Chemical and physical transformations of the compounds occur in the atmosphere as well as the media onto which they deposit. These transformations in turn influence the fate, bioavailability and potential toxicity of these compounds.

Adverse impacts to human health and the environment can occur when particulate matter is deposited to soils, water, and biota.<sup>592</sup> Deposition of heavy metals or other toxics may lead to the human ingestion of contaminated fish, impairment of drinking water, damage to terrestrial, freshwater and marine ecosystem components, and limits to recreational uses. Atmospheric deposition has been identified as a key component of the environmental and human health hazard posed by several pollutants including mercury, dioxin and PCBs.<sup>593</sup>

The ecological effects of acidifying deposition and nutrient enrichment are detailed in the Integrated Science Assessment for Oxides of Nitrogen and Sulfur-Ecological Criteria.<sup>594</sup> Atmospheric deposition of nitrogen and sulfur contributes to acidification,

altering biogeochemistry and affecting animal and plant life in terrestrial and aquatic ecosystems across the United States. The sensitivity of terrestrial and aquatic ecosystems to acidification from nitrogen and sulfur deposition is predominantly governed by geology. Prolonged exposure to excess nitrogen and sulfur deposition in sensitive areas acidifies lakes, rivers and soils. Increased acidity in surface waters creates inhospitable conditions for biota and affects the abundance and biodiversity of fishes, zooplankton and macroinvertebrates and ecosystem function. Over time, acidifying deposition also removes essential nutrients from forest soils, depleting the capacity of soils to neutralize future acid loadings and negatively affecting forest sustainability. Major effects in forests include a decline in sensitive tree species, such as red spruce (*Picea rubens*) and sugar maple (*Acer saccharum*). In addition to the role nitrogen deposition plays in acidification, nitrogen deposition also leads to nutrient enrichment and altered biogeochemical cycling. In aquatic systems increased nitrogen can alter species assemblages and cause eutrophication. In terrestrial systems nitrogen loading can lead to loss of nitrogen sensitive lichen species, decreased biodiversity of grasslands, meadows and other sensitive habitats, and increased potential for invasive species. For a broader explanation of the topics treated here, refer to the description in Chapter 8.1.2.3 of the RIA.

Building materials including metals, stones, cements, and paints undergo natural weathering processes from exposure to environmental elements (e.g., wind, moisture, temperature fluctuations, sunlight, etc.). Pollution can worsen and accelerate these effects. Deposition of PM is associated with both physical damage (materials damage effects) and impaired aesthetic qualities (soiling effects). Wet and dry deposition of PM can physically affect materials, adding to the effects of natural weathering processes, by potentially promoting or accelerating the corrosion of metals, by degrading paints and by deteriorating building materials such as stone, concrete and marble.<sup>595</sup> The effects of PM are exacerbated by the presence of acidic gases and can be additive or synergistic due to the

complex mixture of pollutants in the air and surface characteristics of the material. Acidic deposition has been shown to have an effect on materials including zinc/galvanized steel and other metal, carbonate stone (as monuments and building facings), and surface coatings (paints).<sup>596</sup> The effects on historic buildings and outdoor works of art are of particular concern because of the uniqueness and irreplaceability of many of these objects.

### (4) Environmental Effects of Air Toxics

Emissions from producing, transporting and combusting fuel contribute to ambient levels of pollutants that contribute to adverse effects on vegetation. Volatile organic compounds, some of which are considered air toxics, have long been suspected to play a role in vegetation damage.<sup>597</sup> In laboratory experiments, a wide range of tolerance to VOCs has been observed.<sup>598</sup> Decreases in harvested seed pod weight have been reported for the more sensitive plants, and some studies have reported effects on seed germination, flowering and fruit ripening. Effects of individual VOCs or their role in conjunction with other stressors (e.g., acidification, drought, temperature extremes) have not been well studied. In a recent study of a mixture of VOCs including ethanol and toluene on herbaceous plants, significant effects on seed production, leaf water content and photosynthetic efficiency were reported for some plant species.<sup>599</sup>

Research suggests an adverse impact of vehicle exhaust on plants, which has in some cases been attributed to aromatic compounds and in other cases to nitrogen oxides.<sup>600 601 602</sup>

<sup>596</sup> Irving, P.M., ed. 1991. Acid Deposition: State of Science and Technology, Volume III, Terrestrial, Materials, Health, and Visibility Effects, The U.S. National Acid Precipitation Assessment Program, Chapter 24, page 24–76.

<sup>597</sup> U.S. EPA. (1991). Effects of organic chemicals in the atmosphere on terrestrial plants. EPA/600/3–91/001.

<sup>598</sup> Cape JN, ID Leith, J Binnie, J Content, M Donkin, M Skewes, DN Price AR Brown, AD Sharpe. (2003). Effects of VOCs on herbaceous plants in an open-top chamber experiment. Environ. Pollut. 124:341–343.

<sup>599</sup> Cape JN, ID Leith, J Binnie, J Content, M Donkin, M Skewes, DN Price AR Brown, AD Sharpe. (2003). Effects of VOCs on herbaceous plants in an open-top chamber experiment. Environ. Pollut. 124:341–343.

<sup>600</sup> Viskari E-L. (2000). Epicuticular wax of Norway spruce needles as indicator of traffic pollutant deposition. Water, Air, and Soil Pollut. 121:327–337.

<sup>601</sup> Ugrekhelidze D, F Korte, G Kvesitadze. (1997). Uptake and transformation of benzene and toluene by plant leaves. Ecotox. Environ. Safety 37:24–29.

<sup>602</sup> Kammerbauer H, H Selinger, R Rommelt, A Ziegler-Jons, D Knoppik, B Hock. (1987). Toxic

<sup>592</sup> U.S. EPA. Integrated Science Assessment for Particulate Matter (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R–08/139F, 2009.

<sup>593</sup> U.S. EPA. (2000). Deposition of Air Pollutants to the Great Waters: Third Report to Congress. Office of Air Quality Planning and Standards. EPA–453/R–00–0005.

<sup>594</sup> NO<sub>x</sub> and SO<sub>x</sub> secondary ISA<sup>594</sup> U.S. EPA. Integrated Science Assessment (ISA) for Oxides of Nitrogen and Sulfur Ecological Criteria (Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/R–08/082F, 2008.

<sup>595</sup> U.S. Environmental Protection Agency (U.S. EPA). 2009. Integrated Science Assessment for Particulate Matter (Final Report). EPA–600–R–08–139F. National Center for Environmental Assessment—RTP Division. December. Available on the Internet at <<http://cfpub.epa.gov/ncea/cfm/recordisplay.cfm?deid=216546>>.

### D. Air Quality Impacts of Non-GHG Pollutants

#### (1) Current Concentrations of Non-GHG Pollutants

Nationally, levels of PM<sub>2.5</sub>, ozone, NO<sub>x</sub>, SO<sub>x</sub>, CO and air toxics are declining.<sup>603</sup> However, as of July 2, 2014 approximately 147 million people lived in counties designated nonattainment for one or more of the NAAQS, and this figure does not include the people living in areas with a risk of exceeding the NAAQS in the future.<sup>604</sup> The most recent available data indicate that the majority of Americans continue to be exposed to ambient concentrations of air toxics at levels which have the potential to cause adverse health effects.<sup>605</sup> In addition, populations who live, work, or attend school near major roads experience elevated exposure concentrations to a wide range of air pollutants.<sup>606</sup>

EPA recognizes that states and local areas are particularly concerned about the challenges of reducing NO<sub>x</sub> and attaining as well as maintaining the ozone NAAQS. States and local areas are required to adopt emission control measures to attain the NAAQS. States may then choose to seek redesignation to attainment and if they do so they must demonstrate that control measures are in place sufficient to maintain the NAAQS for ten years (and eight years later, a similar demonstration is required for another ten-year period). The most recent revision to the ozone standards was in 2008; the previous 8-hour ozone standards were set in 1997. Attaining and maintaining the NAAQS has been challenging for some areas in the past, and EPA has recently issued a proposal that would strengthen the ozone NAAQS (79 Fed. Reg 75,234, Dec. 17, 2014).

components of motor vehicle emissions for the spruce Picea abies. *Environ. Pollut.* 48:235–243.

<sup>603</sup> U.S. EPA, 2011. Our Nation's Air: Status and Trends through 2010. EPA-454/R-12-001. February 2012. Available at: <http://www.epa.gov/airtrends/2011/>.

<sup>604</sup> Data come from Summary Nonattainment Area Population Exposure Report, current as of July 2, 2014 at: <http://www.epa.gov/oar/oaqps/greenbk/popexp.html> and contained in Docket EPA-HQ-OAR-2014-0827.

<sup>605</sup> U.S. EPA. (2011) Summary of Results for the 2005 National-Scale Assessment. [www.epa.gov/ttn/atw/nata2005/05pdf/sum\\_results.pdf](http://www.epa.gov/ttn/atw/nata2005/05pdf/sum_results.pdf).

<sup>606</sup> Health Effects Institute Panel on the Health Effects of Traffic-Related Air Pollution. (2010) Traffic-related air pollution: a critical review of the literature on emissions, exposure, and health effects. HEI Special Report 17. Available at <http://www.healtheffects.org/>.

#### (2) Impacts of Proposed Standards on Future Ambient Concentrations of Non-GHG Pollutants

Full-scale photochemical air quality modeling is necessary to accurately project levels of criteria pollutants and air toxics. For the final rulemaking, national-scale air quality modeling analyses will be performed to analyze the impacts of the standards on PM<sub>2.5</sub>, ozone, NO<sub>2</sub>, and selected air toxics (*i.e.*, benzene, formaldehyde, acetaldehyde, naphthalene, acrolein and 1,3-butadiene). The length of time needed to prepare the necessary emissions inventories, in addition to the processing time associated with the modeling itself, has precluded us from performing air quality modeling for this proposal.

Section VIII.A of the preamble presents projections of the changes in criteria pollutant and air toxics emissions due to the proposed vehicle standards; the basis for those estimates is set out in Chapter 5 of the draft RIA. NHTSA also provides its projections in Chapter 4 of its DEIS. The atmospheric chemistry related to ambient concentrations of PM<sub>2.5</sub>, ozone and air toxics is very complex, and making predictions based solely on emissions changes is extremely difficult. However, based on the magnitude of the emissions changes predicted to result from the proposed standards, the agencies expect that there will be improvements in ambient air quality, pending more comprehensive analyses for the final rulemaking.

For the final rulemaking national-scale air quality modeling analyses will be performed to estimate future year ambient ozone, NO<sub>2</sub>, and PM<sub>2.5</sub> concentrations, air toxics concentrations, visibility levels and nitrogen and sulfur deposition levels for 2040. The agencies intend to use a 2011-based Community Multi-scale Air Quality (CMAQ) modeling platform as the tool for the air quality modeling. The CMAQ modeling system is a comprehensive three-dimensional grid-based Eulerian air quality model designed to estimate the formation and fate of oxidant precursors, primary and secondary PM concentrations and deposition, and air toxics, over regional and urban spatial scales (*e.g.*, over the contiguous United States).<sup>607</sup> 608 609 610

<sup>607</sup> U.S. Environmental Protection Agency, Byun, D.W., and Ching, J.K.S., Eds, 1999. Science algorithms of EPA Models-3 Community Multiscale Air Quality (CMAQ) modeling system, EPA/600/R-99/030, Office of Research and Development). Docket EPA-HQ-OAR-2010-0162

<sup>608</sup> Byun, D.W., and Schere, K.L., 2006. Review of the Governing Equations, Computational Algorithms, and Other Components of the Models-

The CMAQ model is a well-known and well-established tool and is commonly used by EPA for regulatory analyses, by States in developing attainment demonstrations for their State Implementation Plans, and in numerous other national and international applications.<sup>611</sup> 612 613 614 The CMAQ model version 5.0 was most recently peer-reviewed in September of 2011 for the U.S. EPA.<sup>615</sup> CMAQ includes numerous science modules that simulate the emission, production, decay, deposition and transport of organic and inorganic gas-phase and particle-phase pollutants in the atmosphere. This 2011 multi-pollutant modeling platform used the most recent multi-pollutant CMAQ code available at the time of air quality modeling (CMAQ version 5.0.2; multipollutant version).<sup>616</sup> CMAQ v5.0.2 reflects updates to version 5.0 to improve the underlying science algorithms as well as include new diagnostic/scientific

3 Community Multiscale Air Quality (CMAQ) Modeling System, J. Applied Mechanics Reviews, 59 (2), 51–77. Docket EPA-HQ-OAR-2010-0162

<sup>609</sup> Dennis, R.L., Byun, D.W., Novak, J.H., Galluppi, K.J., Coats, C.J., and Vouk, M.A., 1996. The next generation of integrated air quality modeling: EPA's Models-3, Atmospheric Environment, 30, 1925–1938. Docket EPA-HQ-OAR-2010-0162

<sup>610</sup> Carlton, A., Bhave, P., Napelnok, S., Edney, E., Sarwar, G., Pinder, R., Pouliot, G., and Houyoux, M. *Model Representation of Secondary Organic Aerosol in CMAQv4.7*. Ahead of Print in Environmental Science and Technology. Accessed at: <http://pubs.acs.org/doi/abs/10.1021/es100636g?prevSearch=CMAQ&searchHistoryKey> Docket EPA-HQ-OAR-2010-0162.

<sup>611</sup> U.S. EPA (2007). Regulatory Impact Analysis of the Proposed Revisions to the National Ambient Air Quality Standards for Ground-Level Ozone. EPA document number 442/R-07-008, July 2007. Docket EPA-HQ-OAR-2010-0162

<sup>612</sup> Hogrefe, C., Biswas, J., Lynn, B., Civerolo, K., Ku, J.Y., Rosenthal, J., et al. (2004). Simulating regional-scale ozone climatology over the eastern United States: model evaluation results. *Atmospheric Environment*, 38(17), 2627–2638.

<sup>613</sup> United States Environmental Protection Agency. (2008). Technical support document for the final locomotive/marine rule: Air quality modeling analyses. Research Triangle Park, N.C.: U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards, Air Quality Assessment Division.

<sup>614</sup> Lin, M., Oki, T., Holloway, T., Streets, D.G., Bengtsson, M., Kanae, S., (2008). Long range transport of acidifying substances in East Asia Part I: Model evaluation and sensitivity studies. *Atmospheric Environment*, 42(24), 5939–5955.

<sup>615</sup> Brown, N., Allen, D., Amar, P., Kallos, G., McNider, R., Russell, A., Stockwell, W. (September 2011). Final Report: Fourth Peer Review of the CMAQ Model, NERL/ORD/EPA. U.S. EPA, Research Triangle Park, NC. [http://www.epa.gov/asmdnerl/Reviews/2011\\_CMAQ\\_Review\\_FinalReport.pdf](http://www.epa.gov/asmdnerl/Reviews/2011_CMAQ_Review_FinalReport.pdf). It is available from the Community Modeling and Analysis System (CMAS) as well as previous peer-review reports at: <http://www.cmascenter.org>.

<sup>616</sup> CMAQ version 5.0.2 was released in April 2014. It is available from the Community Modeling and Analysis System (CMAS) Web site: <http://www.cmascenter.org>.

modules which are detailed at <http://www.cmascenter.org>.<sup>617 618 619</sup>

## IX. Economic and Other Impacts

This section presents the costs, benefits and other economic impacts of the proposed Phase 2 standards. It is important to note that NHTSA's proposed fuel consumption standards and EPA's proposed GHG standards would both be in effect, and each would lead to average fuel efficiency increases and GHG emission reductions.

The net benefits of the proposed Phase 2 standards consist of the effects of the program on:

- The vehicle program costs (costs of complying with the vehicle CO<sub>2</sub> and fuel consumption standards),
  - changes in fuel expenditures associated with reduced fuel use resulting from more efficient vehicles and increased fuel use associated with the "rebound" effect, both of which result from the program,
  - the economic value of reductions in GHGs,
  - the economic value of reductions in non-GHG pollutants,
  - costs associated with increases in noise, congestion, and accidents resulting from increased vehicle use,
  - savings in drivers' time from less frequent refueling,
  - benefits of increased vehicle use associated with the "rebound" effect,
  - the economic value of improvements in U.S. energy security.

The benefits and costs of these rules are analyzed using 3 percent and 7 percent discount rates, consistent with current OMB guidance.<sup>620</sup> These rates are intended to represent consumers' preference for current over future consumption (3 percent), and the real rate of return on private investment (7 percent) which indicates the opportunity cost of capital. However, neither of these rates necessarily represents the discount rate that individual decision-makers use.

The program may also have other economic effects that are not included

here. The agencies seek comment on whether any costs or benefits are omitted from this analysis, so that they can be explicitly recognized in the final rules. In particular, as discussed in Sections III through VI of this preamble and in Chapter 2 of the draft RIA, the technology cost estimates developed here take into account the costs to hold other vehicle attributes, such as size and performance, constant. With these assumptions, and because welfare losses represent monetary estimates of how much buyers would have to be compensated to be made as well off as they would have been in the absence of this regulation,<sup>621</sup> price increases for new vehicles measure the welfare losses to the vehicle buyers.<sup>622</sup> If the full technology cost gets passed along to the buyer as an increase in price, the technology cost thus measures the primary welfare loss of the standards, including impacts on buyers. Increasing fuel efficiency would have to lead to other changes in the vehicles that buyers find undesirable for there to be additional welfare losses that are not included in the technology costs.

As the 2012–2016 and 2017–2025 light-duty GHG/CAFE rules discussed, if other vehicle attributes are not held constant, then the technology cost estimates do not capture the losses to vehicle buyers associated with these changes.<sup>623</sup> The light-duty rules also discussed other potential issues that could affect the calculation of the welfare impacts of these types of

changes, such as aspects of buyers' behavior that might affect the demand for technology investments, uncertainty in buyers' investment horizons, and the rate at which truck owners trade off higher vehicle purchase price against future fuel savings. The agencies seek comments, including supporting data and quantitative analyses, of any additional impacts of the proposed standards on vehicle attributes and performance, or other potential aspects that could positively or negatively affect the welfare implications of this proposed rulemaking.

Where possible, we identify the uncertain aspects of these economic impacts and attempt to quantify them (e.g., sensitivity ranges associated with quantified and monetized GHG impacts; range of dollar-per-ton values to monetize non-GHG health benefits; uncertainty with respect to learning and markups). For HD pickups and vans, the agencies explicitly analyzed the uncertainty surrounding its estimates of the economic impacts from requiring higher fuel efficiency in Preamble Section VI. The agencies have also examined the sensitivity of oil prices on fuel expenditures; results of this sensitivity analysis can be found in Chapter 8 of the RIA. NHTSA's draft EIS also characterizes the uncertainty in economic impacts associated with the HD national program. For other impacts, however, there is inadequate information to inform a thorough, quantitative assessment of uncertainty. EPA and NHTSA continue to work toward developing a comprehensive strategy for characterizing the aggregate impact of uncertainty in key elements of its analyses and we will continue to work to refine these uncertainty analyses in the future as time and resources permit. The agencies seek comments on the methods and assumptions used to quantify uncertainty in this analysis, as well as comments on methods and data that might inform relevant uncertainty analyses not quantified in this analysis.

This and other sections of the preamble address Section 317 of the Clean Air Act on economic analysis. Section IX.L addresses Section 321 of the Clean Air Act on employment analysis. The total monetized benefits and costs of the program are summarized in Section IX.K for the preferred alternative and in Section X for all alternatives.

### A. Conceptual Framework

The HD Phase 2 proposed standards would implement both the 2007 Energy Independence and Security Act requirement that NHTSA establish fuel

<sup>617</sup> Community Modeling and Analysis System (CMAS) Web site: <http://www.cmascenter.org>, RELEASE NOTES for CMAQv5.0—February 2012.

<sup>618</sup> Community Modeling and Analysis System (CMAS) Web site: <http://www.cmascenter.org>, RELEASE NOTES for CMAQv5.0.1—July 2012.

<sup>619</sup> Community Modeling and Analysis System (CMAS) Web site: <http://www.cmascenter.org>, CMAQ version 5.0.2 (April 2014 release) Technical Documentation.—May 2014.

<sup>620</sup> The range of Social Cost of Carbon (SC-CO<sub>2</sub>) values uses several discount rates because the literature shows that the SC-CO<sub>2</sub> is quite sensitive to assumptions about the discount rate, and because no consensus exists on the appropriate rate to use in an intergenerational context (where costs and benefits are incurred by different generations). Refer to Section F.1 for more information.

<sup>621</sup> This approach describes the economic concept of compensating variation, a payment of money after a change that would make a consumer as well off after the change as before it. A related concept, equivalent variation, estimates the income change that would be an alternative to the change taking place. The difference between them is whether the consumer's point of reference is her welfare before the change (compensating variation) or after the change (equivalent variation). In practice, these two measures are typically very close together.

<sup>622</sup> Indeed, it is likely to be an overestimate of the loss to the consumer, because the buyer has choices other than buying the same vehicle with a higher price; she could choose a different vehicle, or decide not to buy a new vehicle. The buyer would choose one of those options only if the alternative involves less loss than paying the higher price. Thus, the increase in price that the buyer faces would be the upper bound of loss of consumer welfare, unless there are other changes to the vehicle due to the fuel efficiency improvements that make the vehicle less desirable to consumers.

<sup>623</sup> Environmental Protection Agency and Department of Transportation, "Light-Duty Vehicle Greenhouse Gas Emission Standards and Corporate Average Fuel Economy Standards; Final Rule," 75 FR 25324, May 7, 2010, especially Sections III.H.1 (25510–25513) and IV.G.6 (25651–25657); Environmental Protection Agency and Department of Transportation, "2017 and Later Model Year Light-Duty Vehicle Greenhouse Gas Emissions and Corporate Average Fuel Economy Standards; Final Rule," 77 FR 62624, October 15, 2012, especially Sections III.H.1 (62913–62919) and IV.G.5.a (63102–63104).

efficiency standards for medium- and heavy-duty vehicles and the Clean Air Act requirement that EPA adopt technology-based standards to control pollutant emissions from motor vehicles and engines contributing to air pollution that endangers public health and welfare. NHTSA's statutory mandate is intended to further the agency's long-standing goals of reducing U.S. consumption and imports of petroleum energy to improve the nation's energy security.

From an economics perspective, government actions to improve our nation's energy security and to protect our nation from the potential threats of climate change address "externalities," or economic consequences of decisions by individuals and businesses that extend beyond those who make these decisions. For example, users of transportation fuels increase the entire U.S. economy's risk of having to make costly adjustments due to rapid increases in oil prices, but these users generally do not consider such costs when they decide to consume more fuel.

Similarly, consuming transportation fuel also increases emissions of greenhouse gases and other more localized air pollutants that occur when fuel is refined, distributed, and consumed. Some of these emissions increase the likelihood and severity of potential climate-related economic damages, and others cause economic damages by adversely affecting human health. The need to address these external costs and other adverse effects provides a well-established economic rationale that supports the statutory direction given to government agencies to establish regulatory programs that reduce the magnitude of these adverse effects at reasonable costs.

The proposed Phase 2 standards would require manufacturers of new heavy-duty vehicles, including trailers (HDVs), to improve the fuel efficiency of the products that they produce. As HDV users purchase and operate these new vehicles, they would consume significantly less fuel, in turn reducing U.S. petroleum consumption and imports as well as emissions of GHGs and other air pollutants. Thus, as a consequence of the agencies' efforts to meet our statutory obligations to improve U.S. energy security and EPA's obligation to issue standards "to regulate emissions of the deleterious pollutant . . . from motor vehicles" that endangers public health and welfare,<sup>624</sup> the proposed fuel efficiency and GHG emission standards would also reduce

HDV operators' outlays for fuel purchases. These fuel savings are one measure of the proposed rule's effectiveness in promoting NHTSA's statutory goal of conserving energy, as well as EPA's obligation to assess the cost of standards under section 202(a)(1) and (2) of the Clean Air Act. Although these savings are not the agencies' primary motivation for adopting higher fuel efficiency standards, these substantial fuel savings represent significant additional economic benefits of this proposal.

Potential savings in fuel costs would appear to offer HDV buyers strong incentives to pay higher prices for vehicles that feature technology or equipment that reduces fuel consumption. These potential savings would also appear to offer HDV manufacturers similarly strong incentives to produce more fuel-efficient vehicles. Economic theory suggests that interactions between vehicle buyers and sellers in a normally-functioning competitive market would lead HDV manufacturers to incorporate all technologies that contribute to lower net costs into the vehicles they offer, and buyers to purchase them willingly. Nevertheless, many readily available technologies that appear to offer cost-effective increases in HDV fuel efficiency (when evaluated over their expected lifetimes using conventional discount rates) have not been widely adopted, despite their potential to repay buyers' initial investments rapidly.

This economic situation is commonly known as the "energy efficiency gap" or "energy paradox." This situation is perhaps more challenging to understand with respect to the heavy-duty sector versus the light-duty vehicle sector. Unlike light-duty vehicles—which are purchased and used mainly by individuals and households—the vast majority of HDVs are purchased and operated by profit-seeking businesses for which fuel costs represent a substantial operating expense. Nevertheless, on the basis of evidence reviewed below, the agencies believe that a significant number of fuel efficiency improving technologies would remain far less widely adopted in the absence of these proposed standards.

Economic research offers several possible explanations for why the prospect of these apparent savings might not lead HDV manufacturers and buyers to adopt technologies that would be expected to reduce HDV operating costs. Some of these explanations involve failures of the HDV market for reasons other than the externalities caused by producing and consuming

fuel. These include situations where information about the performance of fuel economy technologies is incomplete, costly to obtain, or available only to one party to a transaction (or "asymmetrical"), as well as behavioral rigidities in either the HDV manufacturing or HDV-operating industries, such as standardized or inflexibly administered operating procedures, or requirements of other regulations on HDVs. Other explanations for the limited use of apparently cost-effective technologies that do not involve market failures include HDV operators' concerns about the performance, reliability, or maintenance requirements of new technology under the demands of everyday use, uncertainty about the fuel savings they will actually realize, and questions about possible effects on carrying capacity or other aspects of HDVs' utility.

In the HD Phase 1 rulemaking (which, in contrast to these proposed standards, did not apply to trailers), the agencies raised five hypotheses that might explain this energy efficiency gap or paradox:

- Imperfect information in the new vehicle market: Information available to prospective buyers about the effectiveness of some fuel-saving technologies for new vehicles may be inadequate or unreliable. If reliable information on their effectiveness in reducing fuel consumption is unavailable or difficult to obtain, HDV buyers will understandably be reluctant to pay higher prices to purchase vehicles equipped with unproven technologies.

- Imperfect information in the resale market: Buyers in the used vehicle market may not be willing to pay adequate premiums for more fuel efficient vehicles when they are offered for resale to ensure that buyers of new vehicles can recover the remaining value of their original investment in higher fuel efficiency. The prospect of an inadequate return on their original owners' investments in higher fuel efficiency may contribute to the short payback periods that buyers of new vehicles appear to demand.<sup>625</sup>

<sup>625</sup> Committee to Assess Fuel Economy Technologies for Medium- and Heavy-Duty Vehicles; National Research Council; Transportation Research Board (2010). "Technologies and Approaches to Reducing the Fuel Consumption of Medium- and Heavy-Duty Vehicles," (hereafter, "NAS 2010"). Washington, DC: The National Academies Press. Available electronically from the National Academies Press Web site at [http://www.nap.edu/catalog.php?record\\_id=12845](http://www.nap.edu/catalog.php?record_id=12845) (accessed September 10, 2010).

<sup>624</sup> *State of Massachusetts v. EPA*, 549 U.S. at 533.

- **Principal-agent problems causing split incentives:** An HDV buyer may not be directly responsible for its future fuel costs, or the individual who will be responsible for fuel costs may not participate in the HDV purchase decision. In these cases, the signal to invest in higher fuel efficiency normally provided by savings in fuel costs may not be transmitted effectively to HDV buyers, and the incentives of HDV buyers and fuel buyers will diverge, or be “split.” The trailers towed by heavy-duty tractors, which are typically not supplied by the tractor manufacturer or seller, present an obvious potential situation of split incentives that was not addressed in the HD Phase 1 rulemaking, but it may apply in this rulemaking. If there is inadequate pass-through of price signals from trailer users to their buyers, then low adoption of fuel-saving technologies may result.

- **Uncertainty about future fuel cost savings:** HDV buyers may be uncertain about future fuel prices, or about maintenance costs and reliability of some fuel efficiency technologies. Buyers may react to this uncertainty by implicitly discounting potential future savings at rates above discount rates used in this analysis. In contrast, the costs of fuel-saving or maintenance-reducing technologies are immediate and thus not subject to discounting. In this situation, potential variability about buyers’ expected returns on capital investments to achieve higher fuel efficiency may shorten the payback period—the time required to repay those investments—they demand in order to make them.

- **Adjustment and transactions costs:** Potential resistance to new technologies—stemming, for example, from drivers’ reluctance or slowness to adjust to changes in the way vehicles operate—may slow or inhibit new technology adoption. If a conservative approach to new technologies leads HDV buyers to adopt them slowly, then successful new technologies would be adopted over time without market intervention, but only with potentially significant delays in achieving the fuel saving, environmental, and energy security benefits they offer. There also may be costs associated with training drivers to realize potential fuel savings enabled by new technologies, or with accelerating fleet operators’ scheduled fleet turnover and replacement to hasten their acquisition of vehicles equipped with these technologies.

Some of these explanations imply failures in the private market for fuel-saving technology beyond the externalities caused by producing and consuming fuel, while others suggest

that complications in valuing or adapting to technologies that reduce fuel consumption may partly explain buyers’ hesitance to purchase more fuel-efficient vehicles. In either case, adopting this proposed rule would provide regulatory certainty and generate important economic benefits in addition to reducing externalities.

Since the HD Phase 1 rulemaking, new research has provided further insight into potential barriers to adoption of fuel-saving technologies. Several studies utilized focus groups and interviews involving small numbers of participants, who were people with time and inclination to join such studies, rather than selected at random.<sup>626</sup> As a result, the information from these groups is not necessarily representative of the industry as a whole. While these studies cannot provide conclusive evidence about how all HDV buyers make their decisions, they do describe issues that arise for those that participated.

One common theme that emerges from these studies is the inability of HDV buyers to obtain reliable information about the fuel savings, reliability, and maintenance costs of technologies that improve fuel efficiency. In many product markets, such as consumer electronics, credible reviews and tests of product performance are readily available to potential buyers. In the trucking industry, however, the performance of fuel-saving technology is likely to depend on many firm-specific attributes, including the intensity of HDV use, the typical distance and routing of HDV trips, driver characteristics, road conditions, regional geography and traffic patterns.

As a result, businesses that operate HDVs have strong preferences for testing fuel-saving technologies “in-house” because they are concerned that their patterns of vehicle use may lead to different results from those reported in published information. Businesses with less capability to do in-house testing often seek information from peers, yet often remain skeptical of its applicability due to differences in the

nature of their operations. One source of imperfect information is the lack of availability of certain technologies from preferred suppliers. HDV buyers often prefer to have technology or equipment installed by their favored original equipment manufacturers. However, some technologies may not be available through these preferred sources, or may be available only as after-market installations from third parties (Aarnink et al. 2012, Roeth et al. 2013).

Although these studies appear to show that information in the new HDV market is often limited or viewed as unreliable, the evidence for imperfect information in the market for used HDVs is mixed. On the one hand, some studies noted that fuel-saving technology is often not valued or demanded in the used vehicle market, because of imperfect information about its benefits, or greater mistrust of its performance among buyers in the used vehicle market than among buyers of new vehicles. The lack of demand might also be due to the intended use of the used HDV, which may not require or reward the presence of certain fuel-saving technologies. In other cases, however, fuel-saving technology can lead to a premium in the used market, as for instance to meet the more stringent requirements for HDVs operating in California.

All of the recent research identifies split incentives, or principal-agent problems, as a potential barrier to technology adoption. These occur when those responsible for investment decisions are different from the main beneficiaries of the technology. For instance, businesses that own and lease trailers to HDV operators may not have an incentive to invest in trailer-specific fuel-saving technology, since they do not collect the savings from the lower fuel costs that result. Vernon and Meier (2012) estimate that 23 percent of trailers may be exposed to this kind of principal-agent problem, although they do not quantify its financial significance.<sup>627</sup>

Split incentives can also exist when the HDV driver is not responsible for paying fuel costs. Some technologies require additional effort, training, or changes in driving behavior to achieve their promised fuel savings; drivers who do not pay for fuel may be reluctant to undertake those changes, thus reducing the fuel-saving benefits from the perspective of the individual or company paying for the fuel. For

<sup>626</sup> Klemick, Heather, Elizabeth Kopits, Keith Sargent, and Ann Wolverton (2014). “Heavy-Duty Trucking and the Energy Efficiency Paradox.” US EPA NCEE Working Paper Series. Working Paper 14–02; Roeth, Mike, Dave Kircher, Joel Smith, and Rob Swim (2013). “Barriers to the Increased Adoption of Fuel Efficiency Technologies in the North American On-Road Freight Sector.” NACFE report for the International Council on Clean Transportation; Aarnink, Sanne, Jasper Faber, and Eelco den Boer (2012). “Market Barriers to Increased Efficiency in the European On-road Freight Sector.” CE Delft report for the International Council on Clean Transportation.

<sup>627</sup> Vernon, David and Alan Meier (2012). “Identification and quantification of principal-agent problems affecting energy efficiency investments and use decisions in the trucking industry.” Energy Policy, 49(C), pp. 266–273.

instance, drivers might not consistently deploy boat-tails equipped on trailers to improve vehicle aerodynamics.<sup>628</sup> Vernon and Meier also calculate that 91 percent of HDV fuel use is subject to this form of principal-agent problem, although they do not estimate how much it might reduce fuel savings to those who are paying for the fuel.

The studies based on focus groups and interviews (Klemick et al. 2013, Aarnink et al. 2012, Roeth et al. 2013) provide mixed evidence on the severity of the split-incentive problem. Focus groups often do identify diverging incentives between drivers and the decision-makers responsible for purchasing vehicles, and economics literature recognizes that this split incentive can be a barrier to adopting new technology. Aarnink et al. (2012) and Roeth et al. (2013) cite examples of split incentives involving trailers and fuel surcharges, although the latter also cites other examples where these same issues do not lead to split incentives.

In an effort to minimize problems that can arise from split incentives, many businesses that operate HDVs also train drivers in the use of specific technologies or to modify their driving behavior in order to improve fuel efficiency, while some also offer financial incentives to their drivers to conserve fuel. All of these options can help to reduce the split incentive problem, although they may not be effective where it arises from different ownership of combination tractors and trailers.

Uncertainty about future costs for fuel and maintenance, or about the reliability of new technology, also appears to be a significant obstacle that can slow the adoption of fuel-saving technologies. These examples illustrate the problem of uncertain or unreliable information about the actual performance of fuel efficiency technology discussed above. In addition, businesses that operate HDVs may be concerned about how reliable new technologies will prove to be on the road, and whether significant additional maintenance costs or equipment malfunctions that result in costly downtime could occur. Roeth et al. (2013) and Klemick et al. (2013) both document the short payback periods that HDV buyers require on their investments—usually about 2 years—which may be partly attributable to these uncertainties.

<sup>628</sup> Some boat-tails are being developed with technology to open them automatically when the trailer reaches a suitable speed, to reduce this problem.

These studies also provide some support for the view that adjustment and transactions costs may impede HDV buyers from investing in higher fuel efficiency. As discussed above, several studies note that HDV buyers are less likely to select new technology when it is not available from their preferred manufacturers. Some technologies are only available as after-market additions, which can add other costs to adopting them.

Some studies also cite driver acceptance of new equipment or technologies as a barrier to their adoption. HDV driver turnover is high in the U.S., and businesses that operate HDVs are concerned about retaining their best drivers. Therefore, they may avoid technologies that require significant new training or adjustments in driver behavior. For some technologies that can be used to meet the proposed standards, such as automatic tire inflation systems, training costs are likely to be minimal. Other technologies such as stop-start systems, however, may require drivers to adjust their expectations about vehicle operation, and it is difficult for the agencies to anticipate how drivers will respond to such changes.<sup>629</sup>

In addition to these factors, the studies considered other possible explanations for HDV buyers' apparent reluctance or slowness to invest in fuel-saving equipment or technology. Financial constraints—access to lending sources willing to finance purchases of more expensive vehicles—do not appear to be a problem for the medium- and large-sized businesses participating in Klemick et al.'s (2013) study. However, Roeth et al. (2013) noted that access to capital can be a significant challenge to smaller or independent businesses, and that price is always a concern to buyers. In general, businesses that operate HDVs face a range of competing uses for available capital other than investing in fuel-saving technologies, and may assign higher priority to these other uses, even when investing in higher fuel efficiency HDVs appears to promise adequate financial returns.

Other potentially important barriers to the adoption of measures that improve fuel efficiency may arise from “network externalities,” where the benefits to new users of a technology depend on how many others have already adopted it. One example where network

externalities seem likely to arise is the market for natural gas-fueled HDVs: The limited availability of refueling stations may reduce potential buyers' willingness to purchase natural gas-fueled HDVs, while the small number of such HDVs in-use does not provide sufficient economic incentive to construct more natural gas refueling stations.

Some businesses that operate HDVs may also be concerned about the difficulty in locating repair facilities or replacement parts, such as single-wide tires, wherever their vehicles operate. When a technology has been widely adopted, then it is likely to be serviceable even in remote or rural places, but until it becomes widely available, its early adopters may face difficulties with repairs or replacements. By accelerating the widespread adoption of these technologies, the proposed standards may assist in overcoming these difficulties.

As discussed previously, the lack of availability of fuel-saving technologies from preferred manufacturers can also be a significant barrier to adoption (Roeth et al. 2013). Manufacturers may be hesitant to offer technologies for which there is not strong demand, especially if the technologies require significant research and development expenses and other costs of bringing the technology to a market of uncertain demand.

Roeth et al. (2013) also noted that it can take years, and sometimes as much as a decade, for a specific technology to become available from all manufacturers. Many manufacturers prefer to observe the market and follow other manufacturers rather than be the first to market with a specific technology. The “first-mover disadvantage” has been recognized in other research where the “first-mover” pays a higher proportion of the costs of developing technology, but loses the long-term advantage when other businesses follow quickly.<sup>630</sup> In this way, there may be barriers to innovation on the supply side that result in lower adoption rates of fuel-efficiency technology than would be optimal.

In summary, the agencies recognize that businesses that operate HDVs are under competitive pressure to reduce operating costs, which should compel

<sup>629</sup> The distinction between simply requiring drivers (or mechanics) to adjust their expectations and compromises in vehicle performance or utility is subtle. While the former may not impose significant compliance costs in the long run, the latter would represent additional economic costs of complying with the standard.

<sup>630</sup> Blumstein, Carl and Margaret Taylor (2013). “Rethinking the Energy-Efficiency Gap: Producers, Intermediaries, and Innovation,” Energy Institute at Haas Working Paper 243, University of California at Berkeley; Tirole, Jean (1998). *The Theory of Industrial Organization*. Cambridge, MA: MIT Press, pp.400, 402. This first-mover disadvantage must be large enough to overcome the incentive normally offered by the potential to for first movers to earn unusually high (but temporary) profit levels.

HDV buyers to identify and rapidly adopt cost-effective fuel-saving technologies. Outlays for labor and fuel generally constitute the two largest shares of HDV operating costs, depending on the price of fuel, distance traveled, type of HDV, and commodity transported (if any), so businesses that operate HDVs face strong incentives to reduce these costs.<sup>631 632</sup>

However, the short payback periods that buyers of new HDVs appear to require suggest that some combination of uncertainty about future cost savings, transactions costs, and imperfectly functioning markets impedes this process. Markets for both new and used HDVs may face these problems, although it is difficult to assess empirically the degree to which they actually do. Even if the benefits from widespread adoption of fuel-saving technologies exceed their costs, their use may remain limited or spread slowly because their early adopters bear a disproportionate share of those costs. In this case, the proposed standards may help to overcome such barriers by ensuring that these measures would be widely adopted.

Providing information about fuel-saving technologies, offering incentives for their adoption, and sharing HDV operators' real-world experiences with their performance through voluntary programs such as EPA's SmartWay Transport Partnership should assist in the adoption of new cost-saving technologies. Nevertheless, other barriers that impede the diffusion of new technologies are likely to remain. Buyers who are willing to experiment with new technologies expect to find cost savings, but those savings may be difficult to verify or replicate. As noted previously, because benefits from employing these technologies are likely to vary with the characteristics of individual routes and traffic patterns, buyers of new HDVs may find it difficult to identify or verify the effects of fuel-saving technologies in their operations. Risk-averse buyers may also avoid new technologies out of concerns over the possibility of inadequate returns on their investments, or with other possible adverse impacts.

Some HDV manufacturers may delay in investing in the development and production of new technologies, instead

waiting for other manufacturers to bear the risks of those investments first. Competitive pressures in the HDV freight transport industry can provide a strong incentive to reduce fuel consumption and improve environmental performance. However, not every HDV operator has the requisite ability or interest to access and utilize the technical information, or the resources necessary to evaluate this information within the context of his or her own operations.

As discussed previously, whether the technologies available to improve HDVs' fuel efficiency would be adopted widely in the absence of the program is challenging to assess. To the extent that these technologies would be adopted in its absence, neither their costs nor their benefits would be attributed to the program. To account for this possibility, the agencies analyzed the proposed standards and the regulatory alternatives against two reference cases, or baselines, as described in Section X.

The first case uses a baseline that projects some improvement in fuel efficiency for new trailers, but no improvement in fuel efficiency for other vehicle segments in the absence of new Phase 2 standards. This first case is referred to as the less dynamic baseline, or Alternative 1a. The second case uses a baseline that projects some improvement in vehicle fuel efficiency for tractors, trailers, pickup trucks, and vans but not for vocational vehicles. This second case is referred to as the more dynamic baseline, or Alternative 1b.

The agencies will continue to explore reasons for the slow adoption of readily available and apparently cost-effective technologies for improving fuel efficiency. We also seek comments on our hypotheses about its causes, as well as data or other information that can inform our understanding of why this situation seems to persist.

#### *B. Vehicle-Related Costs Associated With the Program*

##### *(1) Technology Cost Methodology*

###### *(a) Direct Manufacturing Costs*

The direct manufacturing costs (DMCs) used throughout this analysis are derived from several sources. Many of the tractor, vocational and trailer DMCs can be sourced to the Phase 1 rule which, in turn, were sourced largely from a contracted study by ICF International for EPA.<sup>633</sup> We have updated those costs by converting them

to 2012 dollars, as described in Section IX.B.1.e below, and by continuing the learning effects described in the Phase 1 rule and in Section IX.B.1.c below. The new tractor, vocational and trailer costs can be sourced to a more recent study conducted by Tetra Tech under contract to NHTSA.<sup>634</sup> The cost methodology used by Tetra Tech was to estimate retail costs and work backward from there to derive a DMC for each technology. The agencies did not agree with the approach used by Tetra Tech to move from retail cost to DMC as the approach was to simply divide retail costs by 2 and use the result as a DMC. Our research, discussed below, suggests that a divisor of 2 is too high. Therefore, where we have used a Tetra Tech derived retail estimate, we have divided by our researched markups to arrive at many of the DMCs used in this analysis. In this way, the agencies have used an approach consistent with past GHG/CAFE/fuel consumption rules by dividing estimated retail prices by our estimated retail price equivalent (RPE) markups to derive an appropriate DMC for each technology. We describe our RPEs in Section IX.B.1.b, below.

For HD pickups and vans, we have relied primarily on the Phase 1 rule and the recent light-duty 2017–2025 model year rule since most technologies expected on these vehicles are, in effect, the same as those used on light-duty pickups. Many of those technology DMCs are based on cost teardown studies which the agencies consider to be the most robust method of cost estimation. However, because most of the HD versions of those technologies are expected to be more costly than their light-duty counterparts, we have scaled upward most of the light-duty DMCs for this analysis. We have also used some costs developed under contract to NHTSA by Tetra Tech.<sup>635</sup>

Importantly, in our methodology, all technologies are treated as being sourced from a supplier rather than being developed and produced in-house. As a result, some portion of the total indirect costs of making a technology or system—those costs incurred by the supplier for research, development, transportation, marketing etc.—are contained in the sales price to the engine and/or vehicle/trailer manufacturer (*i.e.*, the original equipment manufacturer (OEM)). That

<sup>631</sup> American Transportation Research Institute, *An Analysis of the Operational Costs of Trucking*, September 2013 (Docket ID: EPA-HQ-OAR-2014-0827).

<sup>632</sup> Transport Canada, *Operating Cost of Trucks*, 2005. See <http://www.tc.gc.ca/eng/policy/report-acg-operatingcost2005-2005-e-2-1727.htm>, accessed on July 16, 2010 (Docket ID: EPA-HQ-OAR-2014-0827).

<sup>633</sup> ICF International. *Investigation of Costs for Strategies to Reduce Greenhouse Gas Emissions for Heavy-Duty On-Road Vehicles*. July 2010.

<sup>634</sup> Schubert, R., Chan, M., Law, K. (2015). *Commercial Medium- and Heavy-Duty (MD/HD) Truck Fuel Efficiency Cost Study*. Washington, DC: National Highway Traffic Safety Administration.

<sup>635</sup> Schubert, R., Chan, M., Law, K. (2015). *Commercial Medium- and Heavy-Duty (MD/HD) Truck Fuel Efficiency Cost Study*. Washington, DC: National Highway Traffic Safety Administration.



sale price paid by the OEM to the supplier is the DMC we estimate.

We present the details—sources, DMC values, scaling from light-duty values, markups, learning effects, adoption rates—behind all our costs in Chapter 2 of the draft RIA.

#### (b) Indirect Costs

To produce a unit of output, engine and truck manufacturers incur direct and indirect costs. Direct costs include cost of materials and labor costs. Indirect costs are all the costs associated with producing the unit of output that are not direct costs—for example, they may be related to production (such as research and development [R&D]), corporate operations (such as salaries, pensions, and health care costs for corporate staff), or selling (such as transportation, dealer support, and marketing). Indirect costs are generally recovered by allocating a share of the costs to each unit of good sold. Although it is possible to account for direct costs allocated to each unit of good sold, it is more challenging to account for indirect costs allocated to a unit of goods sold. To make a cost analysis process more feasible, markup factors, which relate total indirect costs to total direct costs, have been developed. These factors are often referred to as retail price equivalent (RPE) multipliers.

While the agencies have traditionally used RPE multipliers to estimate indirect costs, in recent GHG/CAFE/fuel consumption rules RPEs have been replaced in the primary analysis with indirect cost multipliers (ICMs). ICMs differ from RPEs in that they attempt to estimate not all indirect costs incurred to bring a product to point of sale, but only those indirect costs that change as a result of a government action or regulatory requirement. As such, some indirect costs, notably health and retirement benefits of retired employees, among other indirect costs, would not be expected to change due to a government action and, therefore, the portion of the RPE that covered those costs does not change.

Further, the ICM is not a “one-size-fits-all” markup as is the traditional RPE. With ICMs, higher complexity technologies like hybridization or moving from a manual to automatic transmission may require higher indirect costs—more research and development, more integration work, etc.—suggesting a higher markup. Conversely, lower complexity technologies like reducing friction or adding passive aero features may require fewer indirect costs thereby suggesting a lower markup.

Notably, ICMs are also not a simple multiplier as are traditional RPEs. The ICM is broken into two parts—warranty related and non-warranty related costs. The warranty related portion of the ICM is relatively small while the non-warranty portion represents typically over 95 percent of indirect costs. These two portions are applied to different DMC values to arrive at total costs (TC). The warranty portion of the markup is applied to a DMC that decreases year-over-year due to learning effects (described below in Section IX.B.1.c).<sup>636</sup> As learning effects decrease the DMC with production volumes, it makes sense that warranty costs would decrease since those parts replaced under warranty should be less costly. In contrast, the non-warranty portion of the markup is applied to a static DMC year-over-year resulting in static indirect costs. This is logical since the production plants and transportation networks and general overhead required to build parts, market them, deliver them and integrate them into vehicles do not necessarily decrease in cost year-over-year. Because the warranty and non-warranty portions of the ICM are applied differently, one cannot compare the markup itself to the RPE to determine which markup would result in higher indirect cost estimates, at least in the time periods typically considered in our rules (four to ten years).

The agencies are concerned that some potential costs associated with this rulemaking may not be adequately captured by our ICMs. ICMs are estimated based on a few specific technologies and these technologies may not be representative of the changes actually made to meet the proposed requirements. Specifically, we may not have adequately estimated the costs for accelerated R&D or potential reliability issues with advanced technologies required by Alternative 4. There is a great deal of uncertainty regarding these costs, and this makes estimates for this alternative of particular concern. We request comment on that aspect of our estimates and on all aspects of our indirect cost estimation approach.

We provide more details on our ICM approach and the markups used for each technology in Chapter 2.12 of the draft RIA.

<sup>636</sup> We note that the labor portion of warranty repairs does not decrease due to learning. However, we do not have data to separate this portion and so we apply learning to the entire warranty cost. Because warranty costs are a small portion of overall indirect costs, this has only a minor impact on the analysis.

#### (c) Learning Effects on Direct and Indirect Costs

For some of the technologies considered in this analysis, manufacturer learning effects would be expected to play a role in the actual end costs. The “learning curve” or “experience curve” describes the reduction in unit production costs as a function of accumulated production volume. In theory, the cost behavior it describes applies to cumulative production volume measured at the level of an individual manufacturer, although it is often assumed—as both agencies have done in past regulatory analyses—to apply at the industry-wide level, particularly in industries that utilize many common technologies and component supply sources. Both agencies believe there are indeed many factors that cause costs to decrease over time. Research in the costs of manufacturing has consistently shown that, as manufacturers gain experience in production, they are able to apply innovations to simplify machining and assembly operations, use lower cost materials, and reduce the number or complexity of component parts. All of these factors allow manufacturers to lower the per-unit cost of production (*i.e.*, the manufacturing learning curve).<sup>637</sup>

In this analysis, the agencies are using the same approach to learning as done in past GHG/CAFE/fuel consumption rules. In short, learning effects result in rapid cost reductions in the early years following introduction of a new technology. The agencies have estimated those cost reductions as resulting in 20 percent lower costs for every doubling of production volume. As production volumes increase, learning rates continue at the same pace but flatten asymptotically due to the nature of the persistent doubling of production required to realize that cost reduction. As such, the cost reductions flatten out as production volumes continue to increase. Consistent with the Phase 1 rule, we refer to these two distinct portions of the “learning cost reduction curve” or “learning curve” as the steeper and flatter portions of the curve. On that steep portion of the curve, costs are estimated to decrease by

<sup>637</sup> See “Learning Curves in Manufacturing”, L. Argote and D. Eppler, Science, Volume 247; “Toward Cost Buy down Via Learning-by-Doing for Environmental Energy Technologies”, R. Williams, Princeton University, Workshop on Learning-by-Doing in Energy Technologies, June 2003; “Industry Learning Environmental and the Heterogeneity of Firm Performance”, N. Balasubramanian and M. Lieberman, UCLA Anderson School of Management, December 2006, Discussion Papers, Center for Economic Studies, Washington DC.



20 percent for each double of production or, by proxy, in the third and then fifth year of production following introduction. On the flat portion of the curve, costs are estimated to decrease by 3 percent per year for 5 years, then 2 percent per year for 5 years, then 1 percent per year for 5 years. Also consistent with the Phase 1 rule, the majority of the technologies we expect would be adopted are considered to be on the flat portion of the learning curve meaning that the 20 percent cost reductions are rarely applied. The agencies request comment on this approach to estimating these effects, and request that commenters provide data and forward-looking information to support any alternative methods or specific estimates.

We provide more details on the concept of learning-by-doing and the learning effects applied in this analysis in Chapter 2 of the draft RIA.

(d) Technology Adoption Rates and Developing Package Costs

Determining the stringency of the proposed standards involves a balancing of relevant factors—chiefly technology feasibility and effectiveness, costs, and lead time. For vocational vehicles,

tractors and trailers, the agencies have projected a technology path to achieve the proposed standards reflecting an application rate of those technologies the agencies consider to be available at reasonable cost in the lead times provided. The agencies do not expect each of the technologies for which costs have been developed to be employed by all trucks and trailers across the board. Further, many of today’s vehicles are already equipped with some of the technologies and/or are expected to adopt them by MY2018 to comply with the HD Phase 1 standards. Estimated adoption rates in both the reference and control cases are necessary for each vehicle/trailer category. The adoption rates for most technologies are zero in the reference case; however, for some technologies—notably aero and tire technologies—the adoption rate is not zero in the reference case. These reference and control case adoption rates are then applied to the technology costs with the result being a package cost for each vehicle/trailer category.

For HD pickups and vans, the CAFE model determines the technology adoption rates that most cost effectively meet the standards being proposed. Similar to vocational vehicles, tractors

and trailers, package costs are rarely if ever a simple sum of all the technology costs since each technology would be expected to be adopted at different rates. The methods for estimating technology adoption rates and resultant costs (and other impacts) for HD pickups and vans are discussed above in Section 6.

We provide details of expected adoption rates in Chapter 2 of the draft RIA. We present package costs both in Sections III through VI of this preamble and in more detail in Chapter 2 of the draft RIA.

(e) Conversion of Technology Costs to 2012 U.S. Dollars

As noted above in Section IX.B.1, the agencies are using technology costs from many different sources. These sources, having been published in different years, present costs in different year dollars (*i.e.*, 2009 dollars or 2010 dollars). For this analysis, the agencies sought to have all costs in terms of 2012 dollars to be consistent with the dollars used by AEO in its 2014 Annual Energy Outlook.<sup>638</sup> The agencies have used the GDP Implicit Price Deflator for Gross Domestic Product as the converter, with the actual factors used as shown in Table IX–1.<sup>639</sup>

TABLE IX–1—IMPLICIT PRICE DEFLATORS AND CONVERSION FACTORS FOR CONVERSION TO 2012\$

	2006	2007	2008	2009	2010	2011	2012	2013
Price index for GDP .....	94.818	97.335	99.236	100	101.211	103.199	105.002	106.588
Factor applied for 2012\$ .....	1.107	1.079	1.058	1.050	1.037	1.017	1.000	0.985

(2) Compliance Program Costs

The agencies have also estimated additional and/or new compliance costs associated with the proposed standards. Normally, compliance program costs would be considered part of the indirect costs and, therefore, would be accounted for via the markup applied to direct manufacturing costs. However, since the agencies are proposing new compliance elements that were not present during development of the indirect cost markups used in this analysis, additional compliance program costs are being accounted for via a separate “line-item.” New research and development costs (see below) are being handled in the same way.

The new compliance program elements included in this proposal are new powertrain testing within the vocational vehicle program, and an all-new compliance program where none has existed to date within the trailer

program. Note that for HD pickups and vans, HD engines, vocational vehicles and tractors, the Phase 1 rule included analogous compliance program costs meant to account for costs incurred in the all-new compliance program placed on the regulated firms by that rule. Compliance program costs cover costs associated with any necessary compliance testing and reporting to the agencies and differ somewhat by alternative since, for example, more manufacturers are expected to conduct powertrain testing under alternative 4 than under alternative 3, etc. The details behind the estimated compliance program costs are provided in Chapter 7 of the draft RIA. We request comment on our estimated compliance costs.

(3) Research and Development Costs

Much like the compliance program costs described above, we have estimated additional HDD engine,

vocational vehicle and tractor R&D associated with the proposed standards that is not accounted for via the indirect cost markups used for these segments. Much like the Phase 1 rule, EPA is estimating these additional R&D costs will occur over a 4-year timeframe as the proposed standards come into force and industry works on means to comply. After that period, the additional R&D costs go to \$0 as R&D expenditures return to their normal levels and R&D costs are accounted for via the ICMs—and the RPEs behind them—used for these segments. Note that, due to the accelerated implementation of some technologies, alternative 4 has higher R&D costs than does alternative 3. The details behind the estimated R&D costs are provided in Chapter 7 of the draft RIA. We request comment on our estimated R&D costs.

<sup>638</sup> U.S. Energy Information Administration, Annual Energy Outlook 2014, Early Release; Report

Number DOE/EIA–0383ER (2014), December 16, 2013.

<sup>639</sup> Bureau of Economic Analysis, Table 1.1.9 Implicit Price Deflators for Gross Domestic Product; as revised on March 27, 2014.

## (4) Summary of Costs of the Proposed Vehicle Programs

The agencies have estimated the costs of the proposed vehicle standards on an annual basis for the years 2018 through

2050, and have also estimated costs for the full model year lifetimes of MY2018 through MY2029 vehicles. Table IX–2 shows the annual costs of the proposed standards along with net present values using both 3 percent and 7 percent

discount rates. Table IX–3 shows the discounted model year lifetime costs of the proposed standards at both 3 percent and 7 percent discount rates along with sums across applicable model years.

TABLE IX–2—ANNUAL COSTS OF THE PREFERRED ALTERNATIVE AND NET PRESENT VALUES AT 3% AND 7% DISCOUNT RATES USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE

[\$Millions of 2012\$]<sup>a</sup>

Calendar year	New technology	Compliance	R&D	Sum
2018 .....	116	0	0	116
2019 .....	113	0	0	113
2020 .....	112	0	0	112
2021 .....	2,173	18	240	2,432
2022 .....	2,161	6	240	2,407
2023 .....	2,224	6	240	2,470
2024 .....	3,455	6	240	3,701
2025 .....	3,647	6	0	3,653
2026 .....	3,736	6	0	3,742
2027 .....	5,309	6	0	5,315
2028 .....	5,334	6	0	5,340
2029 .....	5,376	6	0	5,381
2030 .....	5,399	6	0	5,405
2035 .....	5,856	6	0	5,862
2040 .....	6,316	6	0	6,322
2050 .....	6,987	6	0	6,992
NPV, 3% .....	85,926	104	759	86,789
NPV, 7% .....	40,516	56	561	41,133

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE IX-3—DISCOUNTED MY LIFETIME COSTS OF THE PREFERRED ALTERNATIVE USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE  
[\$Millions of 2012\$]<sup>a</sup>

Model year	Discounted at 3%				Discounted at 7%			
	New technology	Compliance	R&D	Sum	New technology	Compliance	R&D	Sum
2018 .....	104	0	0	104	91	0	0	91
2019 .....	99	0	0	99	84	0	0	84
2020 .....	95	0	0	95	77	0	0	77
2021 .....	1,794	15	198	2,007	1,401	12	155	1,567
2022 .....	1,731	5	193	1,928	1,302	3	145	1,450
2023 .....	1,730	4	187	1,921	1,252	3	135	1,390
2024 .....	2,610	4	181	2,795	1,818	3	126	1,947
2025 .....	2,674	4	0	2,678	1,793	3	0	1,796
2026 .....	2,660	4	0	2,664	1,717	3	0	1,719
2027 .....	3,670	4	0	3,673	2,280	2	0	2,283
2028 .....	3,580	4	0	3,583	2,141	2	0	2,143
2029 .....	3,502	4	0	3,506	2,017	2	0	2,019
Sum .....	24,248	48	759	25,055	15,973	33	561	16,568

**Note:**

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D.; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

New technology costs begin in MY2018 as trailers begin to add new technology. Compliance costs begin with the new standards with capital cost expenditure in that year for building and upgrading test facilities to conduct the proposed powertrain testing in the vocational program. Research and development costs begin in 2021 and last for 4 years as engine, tractor and vocational vehicle manufacturers conduct research and development testing to integrate new technologies into their engines and vehicles. We request comment on all aspects of our technology costs, both individual technology costs and package costs, as detailed in Chapter 2 of the draft RIA.

### *C. Changes in Fuel Consumption and Expenditures*

#### (1) Changes in Fuel Consumption

The new GHG and fuel consumption standards would result in significant improvements in the fuel efficiency of affected vehicles, and drivers of those vehicles would see corresponding savings associated with reduced fuel expenditures. The agencies have estimated the impacts on fuel consumption for the proposed standards. Details behind how these changes in fuel consumption were calculated are presented in Section VII of this preamble and in Chapter 5 of the draft RIA. The total number of miles that vehicles are driven each year is

different under the regulatory alternatives than in the reference case due to the “rebound effect” (discussed below in Section IX.E), so the changes in fuel consumption associated with each alternative are not strictly proportional to differences in the fuel economy levels they require.

The expected annual impacts on fuel consumption are shown in Table IX–4. Table IX–5 shows the MY lifetime changes in fuel consumption. The gallons shown in these tables as reductions in fuel consumption reflect reductions due to the proposed standards and include any increased consumption resulting from the rebound effect (discussed below in Section IX.E).

**TABLE IX–4—ANNUAL FUEL CONSUMPTION REDUCTIONS DUE TO THE PREFERRED ALTERNATIVE USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**

[Millions of gallons]<sup>a</sup>

Calendar year	Gasoline			Diesel		
	Reference case	Fuel consumption reduction	% Reduction	Reference case	Fuel consumption reduction	% Reduction
2018 .....	6,781	0	0	45,999	74	0
2019 .....	6,799	0	0	46,362	150	0
2020 .....	6,832	0	0	46,768	227	0
2021 .....	6,884	10	0	47,236	523	1
2022 .....	6,944	29	0	47,761	894	2
2023 .....	7,005	57	1	48,309	1,276	3
2024 .....	7,054	99	1	48,807	1,895	4
2025 .....	7,113	151	2	49,400	2,523	5
2026 .....	7,169	210	3	49,967	3,152	6
2027 .....	7,221	291	4	50,420	3,890	8
2028 .....	7,273	369	5	50,821	4,600	9
2029 .....	7,332	445	6	51,262	5,278	10
2030 .....	7,396	516	7	51,792	5,924	11
2035 .....	7,732	801	10	54,602	8,517	16
2040 .....	8,075	968	12	58,082	10,209	18
2050 .....	8,806	1,127	13	65,937	12,310	19

**Note:**

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

**TABLE IX–5—MODEL YEAR LIFETIME FUEL CONSUMPTION REDUCTIONS DUE TO THE PREFERRED ALTERNATIVE USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**

[Millions of Gallons]<sup>a</sup>

Model year	Gasoline			Diesel		
	Reference	Fuel consumption reduction	% Reduction	Reference	Fuel consumption reduction	% Reduction
2018 .....	0	0	0	33,384	754	2
2019 .....	0	0	0	33,922	745	2
2020 .....	0	0	0	34,575	738	2
2021 .....	7,128	113	2	47,792	4,424	9
2022 .....	7,118	216	3	48,112	4,568	9
2023 .....	7,106	317	4	48,366	4,703	10
2024 .....	7,225	493	7	49,577	7,628	15
2025 .....	7,376	602	8	51,050	7,967	16
2026 .....	7,535	714	9	52,420	8,289	16
2027 .....	7,628	982	13	53,532	9,984	19
2028 .....	7,711	992	13	54,524	10,181	19
2029 .....	7,769	999	13	55,421	10,360	19

TABLE IX-5—MODEL YEAR LIFETIME FUEL CONSUMPTION REDUCTIONS DUE TO THE PREFERRED ALTERNATIVE USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE—Continued

[Millions of Gallons]<sup>a</sup>

Model year	Gasoline			Diesel		
	Reference	Fuel consumption reduction	% Reduction	Reference	Fuel consumption reduction	% Reduction
Sum .....	66,596	5,430	8	562,673	70,342	13

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

## (2) Fuel Savings

We have also estimated the changes in fuel expenditures, or the fuel savings, using fuel prices estimated in the Energy and Information Administration's 2014 Annual Energy Outlook.<sup>640</sup> As the AEO fuel price projections go through 2040 and not beyond, fuel prices beyond 2040 were set equal to the 2040 values. These estimates do not account for the significant uncertainty in future fuel prices; the monetized fuel savings would be understated if actual fuel

prices are higher (or overstated if fuel prices are lower) than estimated. The Annual Energy Outlook (AEO) is a standard reference used by NHTSA and EPA and many other government agencies to estimate the projected price of fuel. This has been done using both the pre-tax and post-tax fuel prices. Since the post-tax fuel prices are the prices paid at fuel pumps, the fuel savings calculated using these prices represent the changes fuel purchasers would see. The pre-tax fuel savings measure the value to society of the resources saved when less fuel is

refined and consumed. Assuming no change in fuel tax rates, the difference between these two columns represents the reduction in fuel tax revenues that would be received by state and federal governments, or about \$240 million in 2021 and \$5.2 billion by 2050 as shown in Table IX-6 where annual changes in monetized fuel savings are shown along with net present values using 3 percent and 7 percent discount rates. Table IX-7 Table IX-8 show the discounted model year lifetime fuel savings using 3 percent and 7 percent discount rates, respectively.

TABLE IX-6—ANNUAL FUEL SAVINGS AND NET PRESENT VALUES AT 3% AND 7% DISCOUNT RATES USING METHOD B FOR THE PREFERRED ALTERNATIVE AND RELATIVE TO THE LESS DYNAMIC BASELINE

[\$Millions of 2012\$]<sup>a</sup>

Calendar year	Fuel savings—retail			Fuel savings—untaxed			Change in transfer
	Gasoline	Diesel	Sum	Gasoline	Diesel	Sum	
2018 .....	\$0	\$261	\$261	\$0	\$227	\$227	\$34
2019 .....	0	540	540	0	472	472	68
2020 .....	0	834	834	0	731	731	103
2021 .....	31	1,958	1,989	27	1,723	1,750	239
2022 .....	92	3,413	3,505	80	3,015	3,095	410
2023 .....	183	4,936	5,119	160	4,372	4,532	587
2024 .....	324	7,426	7,750	285	6,594	6,879	871
2025 .....	496	10,035	10,531	436	8,937	9,372	1,158
2026 .....	695	12,683	13,378	613	11,321	11,934	1,445
2027 .....	976	15,883	16,859	861	14,215	15,076	1,782
2028 .....	1,243	18,938	20,181	1,099	16,980	18,079	2,102
2029 .....	1,511	21,974	23,485	1,338	19,745	21,083	2,402
2030 .....	1,770	24,905	26,675	1,571	22,422	23,993	2,682
2035 .....	2,921	38,047	40,968	2,621	34,621	37,242	3,726
2040 .....	3,778	48,300	52,078	3,427	44,357	47,783	4,295
2050 .....	4,397	58,241	62,638	3,988	53,486	57,474	5,164
NPV, 3% .....	37,319	506,971	544,290	33,603	461,992	495,595	48,695
NPR, 7% .....	15,211	212,373	227,584	13,663	192,984	206,646	20,937

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>640</sup> U.S. Energy Information Administration, Annual Energy Outlook 2014, Early Release; Report

Number DOE/EIA-0383ER (2014), December 16, 2013.

TABLE IX–7—DISCOUNTED MODEL YEAR LIFETIME FUEL SAVINGS, 3% DISCOUNT RATE USING METHOD B FOR THE PREFERRED ALTERNATIVE AND RELATIVE TO THE LESS DYNAMIC BASELINE  
[Millions of 2012\$]<sup>a</sup>

Model year	Fuel savings—retail			Fuel savings—untaxed			Change in transfer
	Gasoline	Diesel	Sum	Gasoline	Diesel	Sum	
2018 .....	\$0	\$2,183	\$2,183	\$0	\$1,937	\$1,937	\$246
2019 .....	0	2,123	2,123	0	1,890	1,890	234
2020 .....	0	2,066	2,066	0	1,844	1,844	222
2021 .....	258	12,178	12,436	228	10,898	11,126	1,310
2022 .....	487	12,369	12,856	431	11,094	11,525	1,331
2023 .....	700	12,513	13,212	620	11,247	11,867	1,346
2024 .....	1,067	19,934	21,001	947	17,953	18,901	2,100
2025 .....	1,277	20,435	21,712	1,136	18,441	19,577	2,135
2026 .....	1,484	20,858	22,342	1,323	18,858	20,180	2,161
2027 .....	2,001	24,642	26,643	1,787	22,319	24,106	2,537
2028 .....	1,981	24,610	26,592	1,772	22,329	24,101	2,491
2029 .....	1,957	24,536	26,493	1,754	22,298	24,052	2,441
Sum .....	11,211	178,448	189,659	9,997	161,107	171,105	18,554

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE IX–8—DISCOUNTED MODEL YEAR LIFETIME FUEL SAVINGS, 7% DISCOUNT RATE USING METHOD B FOR THE PREFERRED ALTERNATIVE AND RELATIVE TO THE LESS DYNAMIC BASELINE  
[Millions of 2012\$]<sup>a</sup>

Model year	Fuel savings—retail			Fuel savings—untaxed			Change in transfer
	Gasoline	Diesel	Sum	Gasoline	Diesel	Sum	
2018 .....	\$0	\$1,529	\$1,529	\$0	\$1,352	\$1,352	\$176
2019 .....	0	1,428	1,428	0	1,267	1,267	161
2020 .....	0	1,331	1,331	0	1,185	1,185	146
2021 .....	163	7,538	7,701	143	6,731	6,874	827
2022 .....	295	7,383	7,678	260	6,608	6,869	810
2023 .....	408	7,200	7,607	361	6,458	6,819	789
2024 .....	599	11,055	11,654	531	9,938	10,469	1,186
2025 .....	690	10,917	11,607	613	9,834	10,447	1,160
2026 .....	772	10,734	11,505	687	9,688	10,374	1,131
2027 .....	1,003	12,215	13,218	894	11,046	11,940	1,278
2028 .....	956	11,741	12,697	854	10,636	11,490	1,206
2029 .....	909	11,269	12,179	814	10,228	11,041	1,137
Sum .....	5,794	94,339	100,134	5,157	84,971	90,128	10,005

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

#### D. Maintenance Expenditures

The agencies expect minimal increases in maintenance costs under the proposed standards, having estimated increased maintenance costs associated only with installation of lower rolling resistance tires. We expect that, when replaced, the lower rolling resistance tires would be replaced by equivalent performing tires throughout the vehicle lifetime. As such, the incremental increases in costs for lower rolling resistance tires would be incurred throughout the vehicle lifetime at intervals consistent with current tire replacement intervals. Those intervals are difficult to quantify given the variety of vehicles and operating modes within the HD industry. We detail the inputs used to estimate maintenance impacts

in Chapter 7.3.3 of the draft RIA. We request comment on all aspects of the maintenance estimates. Specifically, for electrified vehicles (mild/strong hybrids) which are expected in alternatives 3 and 4 and in each vehicle category, we have not estimated any increased maintenance costs. We have heard from at least one source<sup>641</sup> that strong hybrid maintenance can be higher in some ways, including possible battery replacement, but may also be much lower for some vehicle systems like brakes and general engine wear. Given the uncertainty, we have not estimated maintenance costs specifically for these electrified vehicles but request comment so that we might

<sup>641</sup> Allison Transmission's Responses to EPA's Hybrid Questions, November 6, 2014.

be able to include potential costs in the final rule. We also request comment on any other maintenance costs that should be considered along with supporting data.

Table IX–9 shows the annual increased maintenance costs of the preferred alternative along with net present values using both 3 percent and 7 percent discount rates. Table IX–10 shows the discounted model year lifetime increased maintenance costs of the preferred alternative at both 3 percent and 7 percent discount rates along with sums across applicable model years.

TABLE IX-9—ANNUAL MAINTENANCE EXPENDITURE INCREASE DUE TO THE PROPOSAL AND NET PRESENT VALUES AT 3% AND 7% DISCOUNT RATES USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE

[\$Millions of 2012\$]<sup>a</sup>

Calendar year	Maintenance expenditure increase
2018 .....	\$6
2019 .....	11
2020 .....	16
2021 .....	28
2022 .....	39
2023 .....	50
2024 .....	64
2025 .....	78

TABLE IX-9—ANNUAL MAINTENANCE EXPENDITURE INCREASE DUE TO THE PROPOSAL AND NET PRESENT VALUES AT 3% AND 7% DISCOUNT RATES USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE—Continued

[\$Millions of 2012\$]<sup>a</sup>

Calendar year	Maintenance expenditure increase
2026 .....	90
2027 .....	104
2028 .....	116
2029 .....	127
2030 .....	127
2035 .....	127
2040 .....	127
2050 .....	127

TABLE IX-9—ANNUAL MAINTENANCE EXPENDITURE INCREASE DUE TO THE PROPOSAL AND NET PRESENT VALUES AT 3% AND 7% DISCOUNT RATES USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE—Continued

[\$Millions of 2012\$]<sup>a</sup>

Calendar year	Maintenance expenditure increase
NPV, 3% .....	1,796
NPV, 7% .....	860

**Note:**  
<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE IX-10—DISCOUNTED MY LIFETIME MAINTENANCE EXPENDITURE INCREASE DUE TO THE PROPOSAL USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE

[\$Millions of 2012\$]<sup>a</sup>

Model year	3% Discount rate	7% Discount rate
2018 .....	51	36
2019 .....	49	33
2020 .....	47	31
2021 .....	90	57
2022 .....	89	54
2023 .....	89	52
2024 .....	112	63
2025 .....	113	61
2026 .....	102	53
2027 .....	116	58
2028 .....	111	54
2029 .....	101	47
Sum .....	1,071	600

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

*E. Analysis of the Rebound Effect*

The “rebound effect” has been defined a number of ways in the literature, and one common definition states that the rebound effect is the increase in demand for an energy service when the cost of the energy service is reduced due to efficiency improvements.<sup>642 643 644</sup> In the context

<sup>642</sup> Winebrake, J.J., Green, E.H., Comer, B., Corbett, J.J., Froman, S., 2012. Estimating the direct rebound effect for on-road freight transportation. *Energy Policy* 48, 252–259.

<sup>643</sup> Greene, D.L., Kahn, J.R., Gibson, R.C., 1999, “Fuel economy rebound effect for U.S. household vehicles”, *The Energy Journal*, 20.

<sup>644</sup> For a discussion of the wide range of definitions found in the literature, see Appendix D: Discrepancy in Rebound Effect Definitions, in EERA (2014), “Research to Inform Analysis of the Heavy-Duty vehicle Rebound Effect”, Excerpts of Draft Final Report of Phase 1 under EPA contract EP-C-13-025. (Docket ID: EPA-HQ-OAR-2014-0827). See also Greening, L.A., Greene, D.L., Difiglio, C.,

of heavy-duty vehicles (HDVs), this can be interpreted as an increase in HDV fuel consumption resulting from more intensive vehicle use in response to increased vehicle fuel efficiency.<sup>645</sup> Although much of this vehicle use increase is likely to take the form of increases in the number of miles vehicles are driven, it can also take the form of increases in the loaded weight at which vehicles operate or changes in traffic and road conditions vehicles encounter as operators alter their routes

2000, “Energy efficiency and consumption—the rebound effect—a survey”, *Energy Policy*, 28, 389–401.

<sup>645</sup> We discuss other potential rebound effects in section IX.D.3, such as the indirect and economy-wide rebound effects. Note also that there is more than one way to measure HDV energy services and vehicle use. The agencies’ analyses use VMT as a measure (as discussed below); other potential measures include ton-miles, cube-miles, and fuel consumption.

and schedules in response to improved fuel efficiency. Because this more intensive use consumes fuel and generates emissions, it reduces the fuel savings and avoided emissions that would otherwise be expected to result from the increases in fuel efficiency this rulemaking proposes.

Unlike the light-duty vehicle (LDV) rebound effect, the HDV rebound effect has not been extensively studied. According to a 2010 HDV report published by the National Research Council of the National Academies (NRC),<sup>646</sup> it is “not possible to provide

<sup>646</sup> Committee to Assess Fuel Economy Technologies for Medium- and Heavy-Duty Vehicles; National Research Council; Transportation Research Board (2010). “Technologies and Approaches to Reducing the Fuel Consumption of Medium- and Heavy-Duty Vehicles,” Washington, DC: The National Academies Press. Available electronically from the

a confident measure of the rebound effect,” yet NRC concluded that a HDV rebound effect probably exists and that, “estimates of fuel savings from regulatory standards will be somewhat misestimated if the rebound effect is not considered.” Although we believe the HDV rebound effect needs to be studied in more detail, we have nevertheless attempted to capture its potential effect in our analysis of these proposed rules, rather than to await further study. We have elected to do so because the magnitude of the rebound effect is an important determinant of the actual fuel savings and emission reductions that are likely to result from adopting stricter fuel efficiency and GHG emission standards.

In our analysis and discussion below, we focus on one widely-used metric to estimate the rebound effect associated with all types of more intensive vehicle use, the increase in vehicle miles traveled (VMT) that results from improved fuel efficiency. VMT can often provide a reasonable approximation for all types of more intensive vehicle use. For simplicity, we refer to this as “the VMT rebound effect” or “VMT rebound” throughout this section, although we acknowledge that it is an approximation to the rebound effect associated with all types of more intensive vehicle use. The agencies use our VMT rebound estimates to generate VMT inputs that are then entered into the EPA MOVES national emissions inventory model and the Volpe Center’s HD CAFE model. Both of these models use these inputs along with many others to generate projected emissions and fuel consumption changes resulting from each of the regulatory alternatives analyzed.

Using VMT rebound to approximate the fuel consumption impact from all types of more intensive vehicle use may not be completely accurate. Many factors other than distance traveled—for example, a vehicle’s loaded weight—play a role in determining its fuel consumption, so it is also important to consider how changes in these factors are correlated with variation in vehicle miles traveled. Empirical estimates of the effect of weight on HDV fuel consumption vary, but universally show that loaded weight has some effect on fuel consumption that is independent of distance traveled. Therefore, the product of vehicle payload and miles traveled, which typically is expressed in units of “ton-miles” or “ton-kilometers”, has also been considered as

a metric to approximate the rebound effect. Because this metric’s value depends on both payload and distance, it is important to note that changes in these two variables can have different impacts on HDV fuel consumption. This is because the fuel consumed by HDV freight transport is determined by several vehicle attributes including engine and accessory efficiencies, aerodynamic characteristics, tire rolling resistance and total vehicle mass—including payload carried, if any.

Other factors such as vehicle route and traffic patterns can also affect how each of these vehicle attributes contributes to the overall fuel consumption of a vehicle. While it seems intuitive that if all of these other conditions remain constant, a vehicle driving the same route and distance twice will consume twice as much fuel as driving that same route once. However, because of the other vehicle attributes, it is less intuitive how a change in vehicle payload would affect vehicle fuel consumption. We request comment on how the agencies should consider the relationship between changes in vehicle miles traveled, changes in vehicle ton-miles achieved, and overall fuel consumption when considering how best to measure the rebound effect.

Because the factors influencing HDV VMT rebound are generally different from those affecting LDV VMT rebound, much of the research on the LDV sector is likely to not apply to the HDV sector. For example, the owners and operators of LDVs may respond to the costs and benefits associated with changes in their personal vehicle’s fuel efficiency very differently than a HDV fleet owner or operator would view the costs and benefits (e.g., profits, offering more competitive prices for services) associated with changes in their HDVs’ fuel efficiency. To the extent the response differs, such differences may be smaller for HD pickups and vans, which share some similarities with LDVs. As discussed in the 2010 NRC HD report, one difference from the LDV case is that when calculating the change in HDV costs that causes the rebound effect, it is more important to consider all components of HDV operating costs. The costs of labor and fuel generally constitute the two largest shares of HDV operating costs, depending on the price of petroleum, distance traveled, type of vehicle, and commodity transported (if any).<sup>647 648</sup> Equipment depreciation

costs associated with the purchase or lease of an HDV are another significant component of total operating costs. Even when HDV purchases involve upfront, one-time payments, HDV operators must recover the depreciation in the value of their vehicles resulting from their use, so this is likely to be considered as an operating cost they will attempt to pass on to final consumers of HDV operator services.

Estimates of the impact of fuel efficiency standards on HDV VMT, and hence fuel consumption, should account for changes in all of these components of HDV operating costs. The higher the net savings in total operating costs is, the higher the expected rebound effect would be. Conversely, if higher HDV purchase costs outweigh future cost savings and total operating costs increase, HDV costs could rise, which would likely result in a decrease in HDV VMT. In theory, other cost changes resulting from any requirement to achieve higher fuel efficiency, such as changes in maintenance costs or insurance rates, should also be taken into account, although information on these elements of HDV operating costs is extremely limited. In this analysis, the agencies adapt estimates of the VMT rebound effect to project the response of HDV use to the estimated changes in total operating costs that result from the proposed Phase 2 standards. We seek comment and data on how our proposed standards could impact these and other types of HDV operating costs, as well as on our procedure for adapting the VMT rebound effect to estimate the response of HDV use to changes in total operating costs.

Since businesses are profit-driven, one would expect their decisions to be based on the costs and benefits of different operating decisions, both in the near-term and long-term. Specifically, one would expect commercial HDV operators to take into account changes in overall operating costs per mile when making decisions about HDV use and setting rates they charge for their services. If demand for those services is sensitive to the rates HDV operators charge, HDV VMT could change in response to the effect of higher fuel efficiency on the rates HDV operators charge. If demand for HDV services is insensitive to price (e.g., due to lack of good substitutes), however, or if changes in HDV operating costs due to the proposed standards are not

National Academies Press Web site at [http://www.nap.edu/catalog.php?record\\_id=12845](http://www.nap.edu/catalog.php?record_id=12845) (last accessed September 10, 2010).

<sup>647</sup> American Transportation Research Institute, *An Analysis of the Operational Costs of Trucking*, September 2013.

<sup>648</sup> Transport Canada, *Operating Cost of Trucks*, 2005. See <http://www.tc.gc.ca/eng/policy/report-acg-operatingcost2005-2005-e-2-1727.htm>, accessed on July 16, 2010.



passed on to final consumers of HDV operator services, the proposed standards may have a limited impact on HDV VMT.

The following sections describe the factors affecting the magnitude of HDV VMT rebound; review the econometric and other evidence related to HDV VMT rebound; and summarize how we estimated the HDV rebound effect for this proposal.

#### (1) Factors Affecting the Magnitude of HDV VMT Rebound

The magnitude and timing of HDV VMT rebound result from the interaction of many different factors.<sup>649</sup> Fuel savings resulting from fuel efficiency standards may cause HDV operators and their customers to change their patterns of HDV use and fuel consumption in a variety of ways. For example, HDV operators may pass on the fuel cost savings to their customers by decreasing prices for shipping products or providing services, which in turn could stimulate more demand for those products and services (e.g., increases in freight output), and result in higher VMT. As discussed later in this section, HDV VMT rebound estimates determined via other proxy elasticities vary widely, but in no case has there been an estimate that fully offsets the fuel saved due to efficiency improvements (*i.e.*, no rebound effect greater than or equal to 100 percent).

If fuel cost savings are passed on to the HDV operators' customers (e.g., logistics businesses, manufacturers, retailers, municipalities, utilities consumers), those customers might reorganize their logistics and distribution networks over time to take advantage of lower operating costs. For example, customers might order more frequent shipments or choose products that entail longer shipping distances, while freight carriers might divert some shipments to trucks from other shipping modes such as rail, barge or air. In addition, customers might choose to reduce their number of warehouses, reduce shipment rates or make smaller but more frequent shipments, all of which could lead to an increase in HDV VMT. Ultimately, fuel cost savings could ripple through the entire economy, thus increasing demand for goods and services shipped by trucks,

and therefore increase HDV VMT due to increased gross domestic product (GDP).

Conversely, if fuel efficiency standards lead to net increases in the total costs of HDV operation because fuel cost savings do not fully offset the increase in HDV purchase prices and associated depreciation costs, then the price of HDV services could rise. This is likely to spur a decrease in HDV VMT, and perhaps a shift to alternative shipping modes. These effects could also ripple through the economy and affect GDP. Note, however, that we project fuel cost savings will offset technology costs in our analysis supporting our proposed standards.

It is also important to note that any increase in HDV VMT resulting from our proposed standards may be offset, to some extent, by a decrease in VMT by older HDVs. This may occur if lower fuel costs resulting from our standards cause multi-vehicle fleet operators to shift VMT to newer, more efficient HDVs in their fleet or cause operators with newer, more efficient HDVs to be more successful at winning contracts than operators with older HDVs.

Also, as discussed in Chapter 8.3.3 of the Draft RIA, the magnitude of the rebound effect is likely to be influenced by the extent of any market failures that affect the demand for more fuel efficient HDVs, as well as by HDV operators' responses to their perception of the tradeoff between higher upfront HDV purchase costs versus lower but uncertain future expenditures on fuel.

#### (2) Econometric and Other Evidence Related to HDV VMT Rebound

As discussed above, HDV VMT rebound is defined as the change in HDV VMT that occurs in response to an increase in HDV fuel efficiency. We are not aware of any studies that directly estimate this elasticity<sup>650</sup> for the U.S. This section discusses econometric analyses of other related elasticities that could potentially be used as a proxy for measuring HDV VMT rebound, as well as other analyses that may provide insight into the magnitude of HDV VMT rebound. We seek comment on the applicability of the findings from these analyses, as well as additional data and research on the topic of HDV VMT rebound.

One of the challenges to developing robust econometric analyses of HDV

VMT rebound in the U.S. is data limitations. For example, the main source of time-series HDV fuel efficiency data in the U.S. is derived from aggregate fuel consumption and HDV VMT data. This may introduce interdependence or "simultaneity" between measures of HDV VMT and HDV fuel efficiency, because estimates of HDV fuel efficiency are derived partly from HDV VMT. This mutual interdependence makes it difficult to isolate the causal effect of HDV fuel efficiency on HDV VMT and to measure the response of HDV VMT to changes in HDV fuel efficiency.

Data on other important determinants of HDV VMT, such as freight shipping rates, shipment sizes, HDV payloads, and congestion levels on key HDV routes is also limited, of questionable reliability, or unavailable. Additionally, data on HDVs and their use is usually only available at an aggregate level, making it difficult to evaluate potential differences in determinants of VMT for different types of HDV operations (e.g., long-haul freight vs. regional delivery operations) or vehicle sub-classes (e.g., utility vehicles vs. school buses).

Another challenge inherent in using econometric techniques to measure the response of HDV VMT to HDV fuel efficiency is developing model specifications that incorporate the mathematical form and range of explanatory variables necessary to produce reliable estimates of HDV VMT rebound. Many different factors can influence HDV VMT, and the complex relationships among those factors should be considered when measuring the rebound effect.<sup>651</sup>

In practice, however, most studies have employed simplified models. Many use price variables (e.g., price per gallon of fuel, or fuel cost per mile driven) and some measure of aggregate economic activity, such as GDP. However, some of these studies exclude potentially important variables such as the amount of road capacity (which affects travel speeds and may be related to other important characteristics of highway infrastructure), or the price or availability of competing forms of freight transport such as rail or barge (*i.e.*, characteristics of the overall freight transport network).

<sup>649</sup> These factors are discussed more fully in a report to EPA from EERA, which illustrates in a series of diagrams the complex system of decisions and decision-makers that could influence the magnitude and timing of the rebound effect. See Sections 2.2.2, 2.2.3, 2.2.4, and 2.3 in EERA (2014), "Research to Inform Analysis of the Heavy-Duty Vehicle Rebound Effect", Excerpts of Draft Final Report of Phase 1 under EPA contract EP-C-13-025.

<sup>650</sup> Elasticity is the measurement of how responsive an economic variable is to a change in another. For example: *price elasticity of demand* is a measure used in economics to show the responsiveness, or elasticity, of the quantity demanded of a good or service to a change in its price. More precisely, it gives the percentage change in quantity demanded in response to a one percent change in price.

<sup>651</sup> A useful framework for understanding how various responses interact to determine the rebound effect is presented in Section 2 and Appendix B of De Borger, B. and Mulalic, I. (2012), "The determinants of fuel use in the trucking industry—volume, fleet characteristics and the rebound effect", *Transportation Policy*, Volume 24, pp. 284–295. See also Section 3.4 of EERA (2014), "Research to Inform Analysis of the Heavy-Duty vehicle Rebound Effect", Excerpts of Draft Final Report of Phase 1 under EPA contract EP-C-13-025.

## (a) Fuel Price and Fuel Cost Elasticities

This sub-section reviews econometric analyses of the change in HDV use (measured in VMT, ton-mile, or fuel consumption) in response to changes in fuel price (\$/gallon) or fuel cost (\$/mile or \$/ton-mile). The studies presented below attempt to estimate these elasticities in the HDV sector using varying approaches and data sources.

Gately (1990) employed an econometric analysis of U.S. data for the years 1966–1988 to examine the relationship between HDV VMT and average fuel cost per mile, real Gross National Product (GNP), and variables capturing the effects of fuel shortages in 1974 and 1979.<sup>652</sup> The study found no statistically significant relationship between HDV VMT and fuel cost per mile. Gately's estimates of the elasticity of HDV VMT with respect to fuel cost per mile were  $-0.035$  with and  $-0.029$  without the fuel shortage variables, but both estimates had large standard errors. However, Gately's study was beset by numerous statistical problems, which raise serious questions about the reliability of its results.<sup>653</sup>

More recently, Matos and Silva (2011) analyzed road freight transportation sector data for the years 1987–2006 in Portugal to identify the determinants of demand for HDV freight transportation.<sup>654</sup> Using a reduced-form equation relating HDV use (measured in ton-km) to economic activity (GDP) and the energy cost of HDV use (measured in fuel cost per ton-km carried), these authors estimated the elasticity of HDV ton-km with respect to energy costs to be  $-0.241$ . An important strength of Matos and Silva's study is that it also estimated this same elasticity using a procedure that accounted for the effect of potential mutual causality between HDV ton-km and energy costs, and arrived at an identical value.

Differences between HDV use and the level of highway service in Portugal and in the U.S. might limit the applicability of Matos and Silva's result to the U.S. The volume and mix of commodities could differ between the two nations, as could the levels of congestion on their

respective highway networks, transport distances, the extent of intermodal competition, and the characteristics of HDVs themselves. HDVs also operate over a more limited highway network in Portugal than in the United States. Unfortunately, it is difficult to anticipate how these differences might cause Matos and Silva's elasticity estimates to differ from what we might find in the U.S. Finally, their analysis focused on HDV freight transport and did not consider non-freight uses of HDVs, which somewhat limits its usefulness in the analysis of this proposed rulemaking.

De Borger and Mulalic (2012) examined the determinants of fuel use in the Denmark HDV freight transport sector for the years 1980–2007. The authors developed a system of equations that capture linkages among the demand for HDV freight transport, HDV fleet characteristics, and HDV fuel consumption.<sup>655</sup> As De Borger and Mulalic state, “we precisely define and estimate a rebound effect of improvements in fuel efficiency in the trucking industry: Behavioral adjustments in the industry imply that an exogenous improvement in fuel efficiency reduces fuel use less than proportionately. Our best estimate of this effect is approximately 10 percent in the short run and 17 percent in the long run, so that a 1 percent improvement in fuel efficiency reduces fuel use by 0.90 percent (short-run) to 0.83 percent (long-run).”

While De Borger and Mulalic capture a number of important responses that contribute to the rebound effect, some caution is appropriate when using their results to estimate the VMT rebound effect for this proposal. Like the Matos and Silva study, this study examined HDV activity in another country, Denmark, which has a less-developed highway system, lower levels of freight railroad service than the U.S., and is also likely to have a different composition of freight shipping activity. Although the effect of some of these differences is unclear, greater competition from rail shipping in the U.S. and the resulting potential for lower trucking costs to divert some rail freight to truck could cause the VMT rebound effect to be larger in the U.S. than De Borger and Mulalic's estimate for Denmark.

On the other hand, if freight networks are denser and commodity types are more homogenous in Denmark than the

U.S., then shippers may have wider freight trucking options. If this is the case, shippers in Denmark might be more sensitive to changes in freight costs, which could cause the rebound effect in Denmark to be larger than the U.S. Like the Matos and Silva study, this analysis also focuses on freight trucking and does not consider non-freight HDVs (e.g. vocational vehicles). We have been unable to identify adequate data to employ De Borger and Mulalic's model for the U.S. (mainly because time-series data on freight carriage by trucks, driver wages, and vehicle prices in the U.S. are limited).

The Volpe National Transportation Systems Center previously has developed a series of travel forecasting models for the Federal Highway Administration (FHWA).<sup>656</sup> Work conducted by the Volpe Center during 2009–2011 to develop the original version of FHWA's forecasting model was presented in the Regulatory Impact Analysis for the HD GHG Phase 1 rule (see Table 9–2 in that document, which is reproduced below as Table IX–11).<sup>657</sup> In the analysis for the Phase 1 rule, Volpe estimated both state-level and national aggregate models to forecast HDV single unit and combination truck VMT that included fuel cost per mile as an explanatory variable. This analysis used data from 1970–2008 for its national aggregate model, and data for the 50 individual states from 1994–2008 for its state-level model.<sup>658 659</sup>

<sup>656</sup> FHWA Travel Analysis Framework Development of VMT Forecasting Models for Use by the Federal Highway Administration May 12, 2014 [http://www.fhwa.dot.gov/policyinformation/tables/vmt/vmt\\_model\\_dev.pdf](http://www.fhwa.dot.gov/policyinformation/tables/vmt/vmt_model_dev.pdf). Volpe's work was advised by a panel of approximately 20 experts in the measurement, analysis, and forecasting of travel, including academic researchers, transportation consultants, and members of local, state, and federal government transportation agencies. It was also summarized in the paper “Developing a Multi-Level Vehicle Miles of Travel Forecasting Model,” November, 2011, which was presented to the Transportation Research Board's 91st Annual Meeting in January, 2012.

<sup>657</sup> EPA/NHTSA, August 2011. Chapter 9.3.3, Final Rulemaking to Establish Greenhouse gas Emission Standards & Fuel Efficiency Standards for Medium- and Heavy-Duty Engines and Vehicles, Regulatory Impact Analysis. EPA–420–R–11–901. (<http://www.epa.gov/otaq/climate/documents/420r11901.pdf>).

<sup>658</sup> Combination trucks are defined as “all [Class 7/8] trucks designed to be used in combination with one or more trailers with a gross vehicle weight rating over 26,000 lbs.” (AFDC, 2014; ORNL, 2013c). Single-unit trucks are defined as “single frame trucks that have 2-axes and at least 6 tires or a gross vehicle weight rating exceeding 10,000 lbs.” (FHWA, 2013).

<sup>659</sup> The national-level and functional class VMT forecasting models utilize aggregate time-series data for the nation as a whole, so that only a single measure of each variable is available during each time period (i.e., year). In contrast, the state-level

<sup>652</sup> Gately, D., The U.S. Demand for Highway Travel and Motor Fuels, The Energy Journal, Volume 11, No. 3, July 1990, pp.59–73.

<sup>653</sup> The most important of these problems—similar historical time trends in the model's dependent variable and the measures used to explain its historical variation—can lead to “spurious regressions,” or the appearance of behavioral relationships that are simply artifacts of the similarity (or correlation) in historical trends among the model's variables.

<sup>654</sup> Matos, F.J.F., and Silva, F.J.F., “The Rebound Effect on Road Freight Transport: Empirical Evidence from Portugal,” Energy Policy, 39, 2011, pp. 2833–2841.

<sup>655</sup> De Borger, B. and Mulalic, I., “The Determinates of fuel use in the trucking industry—volume, fleet characteristics and the rebound effect”, Transportation Policy, Volume 24, November 2012, pp. 284–295.

Volpe analysts tested a large number of different specifications for its national and state level models that incorporated the effects of factors such as aggregate economic activity and its composition, the volume of U.S. exports and imports, and factors affecting the

cost of producing trucking services (*e.g.*, driver wage rates, truck purchase prices, and fuel costs), and the extent and capacity of the U.S. and states' highway networks.

Table IX–11 summarizes Volpe's Phase 1 estimates of the elasticity of

truck VMT with respect to fuel cost per mile.<sup>660</sup> As it indicates, these estimates vary widely, and the estimates based on state-level and national data differ substantially.

TABLE IX–11—SUMMARY OF VOLPE CENTER ESTIMATES OF ELASTICITY OF TRUCK VMT WITH RESPECT TO FUEL COST PER MILE

Truck type	National data		State data	
	Short run	Long run	Short run	Long run
Single Unit .....	13–22%	28–45%	3–8%	12–21%
Combination .....	N/A	12–14%	N/A	4–5%

Volpe staff conducted additional analysis of the models that yielded the estimates of the elasticity of truck VMT with respect to fuel cost per mile reported in Table IX–11, using updated information on fuel costs and other variables appearing in these models, together with revised historical data on truck VMT provided by DOT's Federal Highway Administration. The newly-available data, statistical procedures employed in conducting this additional analysis, and its results are summarized in materials that can be found in the docket for this rulemaking. This new Volpe analysis was not available at the time the agencies selected the values of the rebound effect for this proposal, but the agencies will consider this work and any other work in the analysis supporting the final rule.

Finally, EPA has contracted with Energy and Environmental Research Associates (EERA), LLC to analyze the HDV rebound effect for regulatory assessment purposes. Excerpts of EERA's initial report to EPA are included in the docket and contain detailed qualitative discussions of the rebound effect as well as data sources that could be used in quantitative analysis.<sup>661</sup> EERA also conducted follow-on quantitative analyses focused on estimating the impact of fuel prices on VMT and fuel consumption. We have included a working paper in the docket on this work, and we seek comment on this work.<sup>662</sup> Note that EERA's working paper was not available at the time the

agencies conducted the analysis of the rebound effect for this proposal, but the agencies will consider this work and any other work in the analysis supporting the final rule.

There are reasons to be cautious about interpreting the elasticities from the studies reviewed in this section as a measure of VMT rebound resulting from our proposed standards. For example, vehicle capacity and loaded weight can vary dynamically in the HDV sector—possibly in response to changes in fuel price and fuel efficiency—and data on these measures are limited. This makes it difficult to confidently infer a direct relationship between trucking output (*e.g.*, ton-miles carried) and VMT assuming a constant average payload.

In addition, fuel cost per mile—calculated by multiplying fuel price per gallon by fuel efficiency in gallons per mile—and fuel price may be imprecise proxies for an improvement in fuel efficiency, because the response of VMT to these variables may differ. For example, if truck operators are more attentive to variation in fuel prices than to changes in fuel efficiency, then fuel price or fuel cost elasticities may overstate the true magnitude of the rebound effect.

Similarly, there is some evidence in the literature that demand for crude petroleum and refined fuels is more responsive to increases than to decreases in their prices, although this research is not specific to the HDV sector.<sup>663</sup> Since improved fuel efficiency

typically causes fuel costs for HDVs to fall (and assuming fuel costs are not fully offset by increases in vehicle purchase prices), fuel price or cost elasticities derived from historical periods when fuel prices were increasing or fuel efficiency was declining may also overstate the magnitude of the rebound effect. An additional unknown is that HDV operators may factor fuel prices and fuel costs into their decision-making about rates to charge for their service differently from the way they incorporate initial vehicle purchase costs.

Despite these limitations, elasticities with respect to fuel price and fuel cost can provide some insight into the magnitude of the HDV VMT rebound effect. The agencies request comment on all of the studies presented in this section.

(b) Freight Price Elasticities

Freight price elasticities measure the percent change in demand for freight in response to a percent change in freight prices, controlling for other variables that may influence freight demand such as GDP, the extent that goods are traded internationally, and road supply and capacity. This type of elasticity is only applicable to the HDV subcategory of freight trucks (*i.e.*, combination tractors and vocational vehicles that transport freight). One desirable attribute of such measures for purposes of this analysis is that they show the response of freight

VMT models have an additional data dimension, since both their dependent variable (VMT) and most explanatory variables have 51 separate observations available for each time period (one for each of the 50 states as well as Washington, DC). In this context, the states represent a “cross-section,” and a continuous annual sequence of these cross-sections is available.

<sup>660</sup> One drawback of the fuel cost measure employed in Volpe's models is that it is based on estimates of fuel economy derived from truck VMT and fuel consumption, which introduces the potential for mutual causality (or “simultaneity”) between VMT and the fuel cost measure and makes the effect of the latter difficult to isolate. This may cause their estimates of the sensitivity of truck VMT to fuel costs to be inaccurate, although the direction of any resulting bias is difficult to anticipate.

<sup>661</sup> EERA (2014), “Research to Inform Analysis of the Heavy-Duty vehicle Rebound Effect”, Excerpts of Draft Final Report of Phase 1 under EPA contract EP–C–13–025.

<sup>662</sup> EERA (2015), “Working Paper on Fuel Price Elasticities for Heavy Duty Vehicles”, Draft Final

Report of Phase 2 under EPA contract EP–C–11–046.

<sup>663</sup> Gately, D. 1993. The Imperfect Price-Reversibility of World Oil Demand. *The Energy Journal*, International Association for Energy Economics, vol. 14 (4), pp. 163–182; Dargay, J.M., Gately, D. 1997. The demand for transportation fuels: Imperfect price-reversibility? *Transportation Research Part B* 31(1); and Sentenac-Chemin, E., 2012. Is the price effect on fuel consumption symmetric? Some evidence from an empirical study. *Energy Policy*, vol. 41, pp. 59–65.

trucking activity to changes to trucking rates, including changes that result from fuel cost savings as well as increases in HDV technology costs.<sup>664</sup>

Freight price elasticities, however, are imperfect proxies for the rebound effect in freight trucks for a number of reasons.<sup>665</sup> For example, in order to apply these elasticities we must assume that our proposed rule's impact on fuel and vehicle costs is fully reflected in freight rates. This may not be the case if truck operators adjust their profit margins or other operational practices (e.g., loading practices, truck driver's wages) instead of freight rates. It is not well understood how trucking firms respond to different types of cost changes (e.g., changes to fuel costs versus labor costs).

Freight price elasticity estimates in the literature typically measure freight activity in tons or ton-miles, rather than VMT. As discussed in the previous section, average truck capacity and payload in the HDV sector varies dynamically—possibly in response to changes in fuel price and fuel efficiency—and data on these measures are limited. This makes it difficult to confidently infer a direct relationship between ton-miles and VMT by assuming a constant average payload. Inferring a direct relationship between tons and VMT is even less straightforward. Additionally, there are significant limitations on national freight rate and freight truck ton-mile data in the U.S., making it difficult to confidently measure the impact of a change in freight rates on ton-miles.<sup>666</sup>

Finally, freight price elasticity estimates in the literature vary significantly based on commodity type, length of haul, region, availability of alternative modes (discussed further in Section IX.E.b.iii below), and functional form of the model (i.e., log-linear, linear, translog) making it difficult to confidently apply any single estimate reported in the literature to nationwide freight activity. For example, elasticity estimates for longer trips tend to be larger in magnitude than those for shorter trips, while demand to ship bulk

commodities tends to be less elastic than for non-bulk commodities.

Although these factors explain some of the differences among reported estimates, much of the observed variation cannot be explained quantitatively. For example, one study that controlled for mode, commodity class, demand elasticity measure (i.e., tons or ton-miles), model estimation form, country, and temporal nature of data only accounted for about half of the observed variation.<sup>667</sup>

#### (c) Mode Shift Case Study

Although the total demand for freight transport is generally determined by economic activity, there is often the choice of shipping freight on modes other than HDVs. This is because the United States has extensive rail, waterway, pipeline, and air transport networks in addition to an extensive highway network; these networks often closely parallel each other and are often viable choices for freight transport for many long-distance shipping routes within the continental U.S. If rates for one mode decline, demand for that mode is likely to increase, and some of this new demand could represent shifts from other modes.<sup>668</sup> The “cross-price elasticity of demand,” which measures the percentage change in demand for shipping by another mode (e.g., rail) given a percentage change in the price of HDV freight transport services, provides a measure of the importance of such mode shifting. Aggregate estimates of cross-price elasticities vary widely,<sup>669</sup> and there is no general consensus on the most appropriate value to use for analytical purposes.

When considering intermodal shift, one of the most relevant kinds of shipments are those that are competitive between rail and HDV modes. These trips generally include long-haul shipments greater than 500 miles, which weigh between 50,000 and 80,000 lbs (the legal road limit in many states). Special kinds of cargo like coal and short-haul deliveries are of less interest because they are generally not economically transferable between HDV and rail modes, so they would not be

expected to shift modes except under an extreme price change. However, to the best of our knowledge, the total amount of freight that could potentially be subject to mode shifting has not been studied extensively.

In order to explore the potential for HDV fuel efficiency standards to produce economic conditions that favor a mode shift from rail to HDVs, EPA commissioned GIFT Solutions, LLC to perform case studies on the HD GHG Phase 1 rule using a number of data sources, including the Commodity Flow Survey, interviews with trucking firms, and the Geospatial Intermodal Freight Transportation (GIFT) model developed by Winebrake and Corbett, which includes information on infrastructure and other route characteristics in the U.S.<sup>670 671</sup>

A central assumption in the case studies was that economic conditions would favor a shift from rail to HDVs if either the price per ton-mile to ship a commodity by HDV, or the price to ship a given quantity of a commodity by HDV, became lower relative to rail transport options post-regulation. The results of the case studies indicate that the HD Phase 1 rule would not seem to create obvious economic conditions that lead to a mode shift from rail to truck, but there are a number of limitations and caveats to this analysis, which are discussed in the final report to EPA by GIFT.<sup>672 673</sup> For example, even if trucking did not become less expensive than rail post-regulation, a relative decrease in the truck versus rail rates might be enough to produce a shift, given that other factors could influence shippers' decisions on modal choice. The study did not, however, consider these other factors such as time-of-delivery and modal capacity. As another example, the analysis assumes all fuel cost savings and incremental vehicle

<sup>664</sup> Note however that a percent change in freight activity in response to a percent change in freight rates should theoretically be larger than a percent change in freight activity in response to a percent change in fuel efficiency because fuel efficiency only impacts a portion of freight operating costs (e.g., fuel and vehicle costs, but not likely driver wages or highway tolls).

<sup>665</sup> Winebrake, J.J., Green, E.H., Comer, B., Corbett, J.J., Froman, S., 2012. Estimating the direct rebound effect for on-road freight transportation. *Energy Policy* 48, 252–259.

<sup>666</sup> See, for example, Appendix E in EERA (2014), “Research to Inform Analysis of the Heavy-Duty Vehicle Rebound Effect”, Draft Final Report of Phase 1 under EPA contract EP-C-13-025.

<sup>667</sup> Li, Z., D.A. Hensher, and J.M. Rose, *Identifying sources of systematic variation in direct price elasticities from revealed preference studies of inter-city freight demand*. Transport Policy, 2011.

<sup>668</sup> Rail lines in parts of the U.S. are thought to be currently oversubscribed. If that is the case, and new freight demand is already being satisfied by trucks, then this would limit the potential for intermodal freight shifts between trucks and rail as the result of this proposed rule.

<sup>669</sup> Winebrake, J.J., Green, E.H., Comer, B., Corbett, J.J., Froman, S., 2012. Estimating the direct rebound effect for on-road freight transportation. *Energy Policy* 48, 252–259.

<sup>670</sup> Winebrake, James and James J. Corbett (2010). “Improving the Energy Efficiency and Environmental Performance of Goods Movement,” in Sperling, Daniel and James S. Cannon (2010) *Climate and Transportation Solutions: Findings from the 2009 Asilomar Conference on Transportation and Energy Policy*. See <http://www.its.ucdavis.edu/events/2009book/Chapter13.pdf>.

<sup>671</sup> Winebrake, J.J.; Corbett, J.J.; Falzarano, A.; Hawker, J.S.; Korfmacher, K.; Ketha, S.; Zilora, S., Assessing Energy, Environmental, and Economic Tradeoffs in Intermodal Freight Transportation, *Journal of the Air & Waste Management Association*, 58(8), 2008 (Docket ID: EPA-HQ-OAR-2010-0162-0008).

<sup>672</sup> See GIFT Solutions, LLC, “Potential for Mode Shift due to Heavy Duty Vehicle Fuel Efficiency Improvements”. February, 2012.

<sup>673</sup> Winebrake, James, J. Corbett, J. Silberman, E. Erin, & B. Comer, 2012. Potential for Mode Shift due to Heavy Duty Vehicle Fuel Efficiency Improvements: A Case Study Approach. GIFT Solutions, LLC.

costs from the HD Phase 1 rule would be passed on to shippers via changes in freight rates, even though the analysis found some evidence that this might not occur (in two cases, the charges for shipping a truckload over a given route and distance were the same despite differences in payloads that should have been reflected in their fuel costs). Given these limitations, more work is needed in this area to explore the potential for mode shift in response to HD fuel efficiency standards.

#### (d) Case Study Using Freight Price Elasticities

Cambridge Systematics, Inc. (CSI) employed a case study approach using freight price elasticity estimates in the literature to show several examples of the magnitude of the HDV rebound effect.<sup>674</sup> In their unpublished paper commissioned by the National Research Council of the National Academies in support of its 2010 HDV report, CSI estimated the effect on HDV VMT from a net decrease in operating costs associated with fuel efficiency improvements, using two different technology cost and fuel savings scenarios for Class 8 combination tractors. Scenario 1 increased average fuel efficiency of the tractor from 5.59 miles per gallon to 6.8 miles per gallon, with an additional cost of \$22,930 for purchasing the improved tractor. Scenario 2 increased the average fuel efficiency to 9.1 miles per gallon, at an incremental cost of \$71,630 per tractor. Both of these scenarios were based on the technologies and targets from a report authored by the Northeast States Center for a Clean Air Future (NESCCAF) and International Council on Clean Transportation (ICCT).<sup>675</sup>

The CSI estimates were based on a range of direct (or “own-price”) freight elasticities (–0.5 to –1.5)<sup>676</sup> and cross-price freight elasticities (0.35 to 0.59)<sup>677</sup>

obtained from the literature.<sup>678</sup> In their calculations, CSI assumed 142,706 million miles of tractor VMT and 1,852 billion ton-miles were affected. The tractor VMT was based on the Bureau of Transportation Statistics’ (BTS) estimate of highway miles for combination tractors in 2006, and the rail ton-miles were based on the BTS estimate of total railroad miles during 2006. This assumption is likely to overstate the rebound effect, since not all freight shipments occur on routes where tractors and rail service shipments compete directly. Nevertheless, this assumption appears to be reasonable in the absence of more detailed information on the percentage of total miles and ton-miles that are subject to potential mode shifting.

For CSI’s calculations, all costs except fuel costs and vehicle costs were taken from a 2008 ATRI study.<sup>679</sup> It is not clear from the report how the new vehicle costs were incorporated into CSI’s calculations of per-mile tractor operating costs. For example, neither the ATRI report nor the CSI report discusses assumptions about depreciation, useful lifetimes of tractors, and the opportunity cost of capital.

Based on these two scenarios, CSI estimated the change in tractor VMT in response to a net decrease in operating costs (*i.e.*, accounting for fuel cost and changes in tractor purchase costs) associated with fuel efficiency improvement of 11–31 percent for Scenario 1 and 5–16 percent for Scenario 2, without accounting for any fuel savings from reduced rail service. When the fuel savings from reduced rail usage were included in the calculations, they estimated the change in tractor VMT in response to a net decrease in operating costs associated with fuel efficiency improvement would be 9–30 percent for Scenario 1, and 3–15 percent for Scenario 2.

Note that these estimates reflect changes to tractor VMT with respect to total operating costs, so they should theoretically be larger than a percent change in tractor VMT with respect to a percent change in fuel efficiency because fuel efficiency only impacts a portion of truck operating costs (*e.g.*,

fuel and vehicle costs, but not likely driver wages or highway tolls).

CSI included caveats associated with these calculations. For example, their report states that freight price elasticity estimates derived from the literature are “heavily reliant on factors including the type of demand measures analyzed (vehicle-miles of travel, ton-miles, or tons), geography, trip lengths, markets served, and commodities transported.” These factors can increase variability in the results. Also, estimates in CSI’s study have the limitation of using freight price elasticities to estimate the HDV rebound effect discussed previously in Section IV.D.2.b.

#### (e) Simulation Model Study Using Freight Price Elasticities

Guerrero (2014) constructs a freight simulation model of the California trucking sector to measure the impact of fuel saving investments and fleet management on GHG emissions.<sup>680</sup> Rather than estimating these impacts using econometric analysis of raw data, the study uses values from the existing literature. Guerrero determines that “. . . improving the performance of trucking also increases the number of trips demanded because the market price also decreases. This ‘rebound’ effect offsets around 40–50 percent of these vehicle efficiency emission reductions, with 9–14 percent of the effect coming from increased pavement deterioration and 31–36 percent coming from increased fuel combustion.” Note that to the extent that trip lengths also vary in response to improvements in HDV fuel efficiency, changes in the number of HDV trips may not exactly reflect changes in the total number of miles the vehicles are operated.

However, these findings are based on freight price elasticities, which—as we discuss in Section IV.D.2.b and in the context of the CSI study above—have significant limitations. The study also simulates only one state’s freight network (California), which may not be a good representation of national activity.

#### (3) How the Agencies Estimated the HDV Rebound Effect for This Proposal

##### (a) Values Used in the Phase 1 Analysis

At the time the agencies conducted their analysis of the Phase 1 fuel efficiency and GHG emissions standards, the only evidence on the HDV rebound effect were the previously

<sup>674</sup> Cambridge Systematics, Inc., Assessment of Fuel Economy Technologies for Medium and Heavy Duty Vehicles: Commissioned Paper on Indirect Costs and Alternative Approaches, 2009.

<sup>675</sup> Northeast States Center for a Clean Air Future, Southeast Research Institute, TIAX, LLC., and International Council on Clean Transportation, *Reducing Heavy-Duty Long Haul Truck Fuel Consumption and CO<sub>2</sub> Emissions*, September 2009. See [http://www.nescaum.org/documents/heavy-duty-truck-ghg\\_report\\_final-200910.pdf](http://www.nescaum.org/documents/heavy-duty-truck-ghg_report_final-200910.pdf).

<sup>676</sup> Graham and Glaister, “Road Traffic Demand Elasticity Estimates: A Review,” *Transport Reviews* Volume 24, 3, pp. 261–274, 2004.

<sup>677</sup> Based upon a study for the National Cooperative Highway Research Program by Cambridge Systematics, Inc., *Characteristics and Changes in Freight Transportation Demand: A Guidebook for Planners and Policy Analysts Phase II Report*, National Cooperative Highway Research Program Project 8–30, June 1995.

<sup>678</sup> The own (*i.e.*, self) price elasticity provides a measure for describing how the volume of truck shipping (demand) changes with its price while the cross-price elasticity provides a measure for describing how the volume of rail shipping changes with truck price. In general, an elasticity describes the percent change in one variable (*e.g.* demand for trucking) in response to a percent-change in another (*e.g.* price of truck operations).

<sup>679</sup> American Transportation Research Institute, “An Analysis of the Operational Costs of Trucking”, October 2008.

<sup>680</sup> Guerrero, Sebastian. Modeling fuel saving investments and fleet management in the trucking industry: The impact of shipment performance on GHG emissions. Transportation Research Part E, May 2014.

described studies from CSI and the Volpe Center.<sup>681</sup> The agencies determined that this evidence did not lend itself to a specific quantitative value for use in the analysis. Rather, based on a qualitative assessment of this evidence informed by the agencies' best professional judgement, the agencies chose rebound effects of 15 percent for vocational vehicles and 5 percent for combination tractors, both of which were toward the lower end of the range of values from these studies. The agencies found no evidence on the rebound effect for HD pickup trucks and vans, but concluded it would be inappropriate to use the values selected for vocational vehicles or combination tractors for those vehicles. Because the usage patterns of HD pickup trucks and vans can more closely resemble those of large light-duty vehicles, the agencies used our judgement to select the 10 percent rebound effect we had employed in our most recent light-duty rulemaking to analyze the Phase 1 standards for 2b/3 vehicles.

#### (b) How the Agencies Analyzed VMT Rebound in This Proposal

After considering the new evidence that has become available since the HD Phase 1 final rule, the agencies elected to continue using the rebound effect estimates we used previously in the HD Phase 1 rule in our analysis of Phase 2 proposed standards. In arriving at this decision, the agencies considered the shortcomings and limitations of the newly-available studies described previously, particularly the limited applicability of the two published studies using data from European nations to the U.S. context. After weighing these attributes of the more recent studies, the agencies concluded that we had insufficient evidence to justify revising the rebound effect values that were used in the Phase 1 analysis.

In our assessment, we do not differentiate between short-run and long-run rebound effects, although these effects may differ. The vocational and combination truck estimates are based on the Volpe Center analysis presented in the HD Phase 1 rule and the case study from CSI. As with the HD Phase 1 rule, we did not find any literature specifically examining the HD pickup and truck sector. Since these vehicles are used for very different purposes than combination tractors and vocational vehicles, and they are more similar in use to large light-duty vehicles, we have chosen the light-duty rebound effect of 10 percent used in the final rule

establishing fuel economy and GHG standards for MYs 2017–2025 light-duty vehicles in our analysis of HD pickup trucks and vans.

While for this proposal, the agencies have selected to use these rebound effect values of 5 percent for combination tractors, 10 percent for heavy duty pickup trucks and vans and 15 percent for vocational vehicles, we acknowledge the literature shows a wide range of rebound effect estimates. Therefore, we will review and consider revising these estimates in the final rule, taking into consideration all available data and analysis, including submissions from public commenters and new research on the rebound effect.

It should be noted that the rebound estimates we have selected for our analysis represent the VMT impact from our proposed standards with respect to changes in the fuel cost per mile driven. As described previously, the HDV rebound effect should ideally be a measure of the change in fuel consumed with respect to the change in *overall* operating costs due to a change in HDV fuel efficiency. Such a measure would incorporate all impacts from our proposal, including those from incremental increases in vehicle prices that reflect costs for improving their fuel efficiency. Therefore, VMT rebound estimates with respect to fuel costs per mile must be “scaled” to apply to total operating costs, by dividing them by the fraction of total operating costs accounted for by fuel.

The agencies made simplifying assumptions in the VMT rebound analysis for this proposal, similar to the approach taken during the development of the HD GHG Phase 1 final rule. However, for the HD Phase 2 final rulemaking, we plan to use a more comprehensive approach. Due to timing constraints during the development of this proposal, the agencies did not have the technology package costs for each of the alternatives prior to the need to conduct the inventory analysis, except for the pickup truck and van category in analysis Method A. Therefore, the same “overall” VMT rebound values were used for Alternatives 2 through 5 (as discussed in Chapter 8.3.3 of the Draft RIA and analyzed in Chapter 6 of the Draft RIA), despite the fact that each alternative results in a different change in incremental technology and fuel costs. For the final rulemaking, we plan to determine VMT rebound separately for each HDV category and for each alternative. Tables 64 through 66 in Chapter 7 of the Draft RIA present VMT rebound for each HDV sector that we estimated for the preferred alternative. These VMT impacts are reflected in the

estimates of total fuel savings and reductions in emissions of GHG and other air pollutants presented in Section VI and VII of this preamble for all categories.

Section 9.3.3 in the draft RIA provides more details on our assessment of HDV VMT rebound. We invite comment on our approach, the rebound estimates, and the related assumptions we made. In particular, we invite comment on the most appropriate methodology for factoring new vehicle purchase or leasing costs into the per-mile operating costs. For the purposes of this proposal, we have not taken into account any potential fuel savings or GHG emission reductions from the rail sector due to mode shift because estimates of this effect seem too speculative at this time. We invite comment on this assumption, as well as suggestions on alternative modeling frameworks that could be used to assess mode shifting implications of our proposed regulations. Similarly, we have not taken into account any fuel savings or GHG emissions reductions from the potential shift in VMT from older HDVs to newer, more efficient HDVs because we have found no evidence of this potential effect from fuel efficiency standards. We invite comment on suggested modeling frameworks or data that could be used to assess the potential for activity to shift from older to newer, more efficient HDVs in response to our proposed standards.

Note that while we focus on the VMT rebound effect in our analysis of this proposed rule, there are at least two other types of rebound effects discussed in the economics literature. In addition to VMT rebound effects, there are “indirect” rebound effects, which refers to the purchase of other goods or services (that consume energy) with the costs savings from energy efficiency improvements; and “economy-wide” rebound effects, which refers to the increased demand for energy throughout the economy in response to the reduced market price of energy that happens as a result of energy efficiency improvements.

Research on indirect and economy-wide rebound effects is nascent, and we have not identified any that attempts to quantify indirect or economy-wide rebound effects for HDVs. In particular, the agencies are not aware of any data to indicate that the magnitude of indirect or economy-wide rebound effects, if any, would be significant for this proposed rule.<sup>682</sup> Therefore, we rely

<sup>681</sup> The Gately study was also available, however, the agencies were not aware of the work at the time.

<sup>682</sup> One entity sought reconsideration of the Phase 1 rule on the grounds that indirect rebound effects

the same analysis of vehicle miles traveled to estimate the rebound effect in this proposal that we did for the HD Phase 1 rule, where we attempted to quantify only rebound effects from our rule that impact HDV VMT. We welcome comments and any new work in this area that helps to assess and quantify different rebound effects that could result from improvements in HDV efficiency, including different types of more intensive truck usage that affect fuel consumption but not VMT such as loaded weight, truck routing, and scheduling.

In order to test the effect of alternative assumptions about the rebound effect, NHTSA examined the sensitivity of its estimates of benefits and costs of the Phase 2 Preferred Alternative for HD pickups and vans to alternative

assumptions about the rebound effect. While the main analysis for pickups and vans assumes a 10 percent rebound effect, the sensitivity analysis estimates the benefits and costs of the proposed standards under the assumptions of 5, 15, and 20 percent rebound effects.

Alternative values of the rebound effect change the estimates of benefits and costs from the proposed standards in three ways. First, higher values of the rebound effect increase the amount of additional VMT that results from improved fuel efficiency; this increases costs associated with additional congestion, accidents, and noise, thus increasing total costs associated with the proposed standards. Conversely, smaller values of the rebound effect reduce costs from additional congestion, accidents, and noise, so they reduce

total costs of the proposed standards. Larger increases in VMT associated with higher values of the rebound effect reduce the value of fuel savings and related benefits (such as reductions in GHG emissions) by progressively larger amounts, while smaller values of the rebound effect cause smaller reductions in these benefits. At the same time, however, a higher rebound effect generates larger benefits from increased vehicle use, while a smaller rebound effect reduces these benefits. Thus the impact of alternative values of the rebound effect on total benefits from the proposed standards depends on the exact magnitudes of these latter two effects. On balance, these three effects can cause net benefits to increase or decrease for alternative values of the rebound effect.

TABLE IX–12—SENSITIVITY OF PREFERRED ALTERNATIVE IMPACTS UNDER DIFFERENT ASSUMPTIONS ABOUT REBOUND EFFECT FOR PICKUPS AND VANS, USING 3% DISCOUNT RATE

HD pickups and vans	Rebound effect			
	Main analysis		Sensitivity cases using alternative rebound assumptions	
	10%	5%	15%	20%
Fuel Reductions (Billion Gallons) .....	7.8	8.2	7.5	7.1
GHG Reductions (MMT CO <sub>2</sub> eq) .....	94.1	95.7	87.2	83.0
Total Costs (\$ billion) .....	5.5	5.0	6.5	7.2
Total Benefits (\$ billion) .....	23.5	23.0	22.9	22.8
Net Benefits (\$ billion) .....	18.0	18.0	16.4	15.5

Table IX–12 summarizes the impact of these alternative assumptions on fuel and GHG emissions savings, total costs, total benefits, and net benefits. As it indicates, using a 5 percent value for the rebound effect reduces benefits and costs of the proposed standards by identical amounts, leaving net benefits unaffected. As the table also shows, rebound effects of 15 percent and 20 percent increase costs and reduce benefits compared to their values in the main analysis, thus reducing net benefits of the proposed standards. Nevertheless, the preferred alternative has significant net benefits under each alternative assumption about the magnitude of the rebound effect for HD pickups and vans. Thus, these alternative values of the rebound effect would not have affected the agencies' selection of the preferred alternative, as that selection is based on NHTSA's assessment of the maximum feasible fuel efficiency standards and EPA's

selection of appropriate GHG standards to address energy security and the environment.

*F. Impact on Class Shifting, Fleet Turnover, and Sales*

The agencies considered two additional potential indirect effects which may lead to unintended consequences of the program to improve the fuel efficiency and reduce GHG emissions from HD trucks. The next sections cover the agencies' qualitative discussions on potential class shifting and fleet turnover effects.

(1) Class Shifting

Heavy-duty vehicles are typically configured and purchased to perform a function. For example, a concrete mixer truck is purchased to transport concrete, a combination tractor is purchased to move freight with the use of a trailer, and a Class 3 pickup truck could be purchased by a landscape company to

pull a trailer carrying lawnmowers. The purchaser makes decisions based on many attributes of the vehicle, including the gross vehicle weight rating of the vehicle, which in part determines the amount of freight or equipment that can be carried. If the proposed Phase 2 standards impact either the performance of the vehicle or the marginal cost of the vehicle relative to the other vehicle classes, then consumers may choose to purchase a different vehicle, resulting in the unintended consequence of increased fuel consumption and GHG emissions in-use.

The agencies, along with the NAS panel, found that there is little or no literature which evaluates class shifting between trucks.<sup>683</sup> NHTSA and EPA qualitatively evaluated the proposed rules in light of potential class shifting. The agencies looked at four potential cases of shifting:—From light-duty pickup trucks to heavy-duty pickup trucks; from sleeper cabs to day cabs;

had not been considered by the agencies and could negate all of the benefits of the standards. This assertion rested on an unsupported affidavit lacking any peer review or other indicia of objectivity. This affidavit cited only one published study. The study

cited did not deal with vehicle efficiency, has methodological limitations (many of them acknowledged), and otherwise was not pertinent. EPA and NHTSA thus declined to reconsider the Phase 1 rule based on these speculative assertions.

See generally 77 FR 51703–51704, August 27, 2012 and 77 FR 51502–51503, August 24, 2012.  
<sup>683</sup> See 2010 NAS Report, page 152.



from combination tractors to vocational vehicles; and within vocational vehicles.

Light-duty pickup trucks, those with a GVWR of less than 8,500 lbs, are currently regulated under the existing GHG/CAFE Phase 1 program and will meet GHG/CAFE Phase 2 emission standards beginning in 2017. The increased stringency of the light-duty 2017–2025 MY vehicle rule has led some to speculate that vehicle consumers may choose to purchase heavy-duty pickup trucks that are currently regulated under the HD Phase 1 program if the cost of the light-duty regulation is high relative to the cost to buy the larger heavy-duty pickup trucks. Since fuel consumption and GHG emissions rise significantly with vehicle mass, a shift from light-duty trucks to heavy-duty trucks would likely lead to higher fuel consumption and GHG emissions, an unintended consequence of the regulations. Given the significant price premium of a heavy-duty truck (often five to ten thousand dollars more than a light-duty pickup), we believe that such a class shift would be unlikely even absent this program. These proposed rules would continue to diminish any incentive for such a class shift because they would narrow the GHG and fuel efficiency performance gap between light-duty and heavy-duty pickup trucks. The proposed regulations for the HD pickup trucks, and similarly for vans, are based on similar technologies and therefore reflect a similar expected increase in cost when compared to the light-duty GHG regulation. Hence, the combination of the two regulations provides little incentive for a shift from light-duty trucks to HD trucks. To the extent that our proposed regulation of heavy-duty pickups and vans could conceivably encourage a class shift towards lighter pickups, this unintended consequence would in fact be expected to lead to lower fuel consumption and GHG emissions as the smaller light-duty pickups have significantly better fuel economy ratings than heavy-duty pickup trucks.

The projected cost increases for this proposed action differ between Class 8 day cabs and Class 8 sleeper cabs, reflecting our expectation that compliance with the proposed standards would lead truck consumers to specify sleeper cabs equipped with APUs while day cab consumers would not. Since Class 8 day cab and sleeper cab trucks perform essentially the same function when hauling a trailer, this raises the possibility that the higher cost for an APU equipped sleeper cab could lead to a shift from sleeper cab to day

cab trucks. We do not believe that such an intended consequence would occur for the following reasons. The addition of a sleeper berth to a tractor cab is not a consumer-selectable attribute in quite the same way as other vehicle features. The sleeper cab provides a utility that long-distance trucking fleets need to conduct their operations—an on-board sleeping berth that lets a driver comply with federally-mandated rest periods, as required by the Department of Transportation Federal Motor Carrier Safety Administration's hours-of-service regulations. The cost of sleeper trucks is already higher than the cost of day cabs, yet the fleets that need this utility purchase them.<sup>684</sup> A day cab simply cannot provide this utility with a single driver. The need for this utility would not be changed even if the additional costs to reduce greenhouse gas emissions from sleeper cabs exceed those for reducing greenhouse gas emissions from day cabs.<sup>685</sup>

A trucking fleet could instead decide to put its drivers in hotels in lieu of using sleeper berths, and switch to day cabs. However, this is unlikely to occur in any great number, since the added cost for the hotel stays would far overwhelm differences in the marginal cost between day and sleeper cabs. Even if some fleets do opt to buy hotel rooms and switch to day cabs, they would be highly unlikely to purchase a day cab that was aerodynamically worse than the sleeper cab they replaced, since the need for features optimized for long-distance hauling would not have changed. So in practice, there would likely be little difference to the environment for any switching that might occur. Further, while our projected costs assume the purchase of an APU for compliance, in fact our proposed regulatory structure would allow compliance using a near zero cost software utility that eliminates tractor idling after five minutes. Using this compliance approach, the cost difference between a Class 8 sleeper cab and day cab due to our proposed regulations is small. We are proposing this alternative compliance approach reflecting that some sleeper cabs are used in team driving situations where one driver sleeps while the other drives. In that situation, an APU is unnecessary

<sup>684</sup> A baseline tractor price of a new day cab is \$89,500 versus \$113,000 for a new sleeper cab based on information gathered by ICF in the "Investigation of Costs for Strategies to Reduce Greenhouse Gas Emissions for Heavy-Duty On-Road Vehicles", July 2010. Page 3. Docket Identification Number EPA-HQ-OAR-2014-0827.

<sup>685</sup> The average marginal cost difference between sleeper cabs and day cabs in the proposal is roughly \$2,500.

since the tractor is continually being driven when occupied. When it is parked, it would automatically eliminate any additional idling through the shutdown software. If trucking businesses choose this option, then costs based on purchase of APUs may overestimate the costs of this program to this sector.

Class shifting from combination tractors to vocational vehicles may occur if a customer deems the additional marginal cost of tractors due to the regulation to be greater than the utility provided by the tractor. The agencies initially considered this issue when deciding whether to include Class 7 tractors with the Class 8 tractors or regulate them as vocational vehicles. The agencies' evaluation of the combined vehicle weight rating of the Class 7 shows that if these vehicles were treated significantly differently from the Class 8 tractors, then they could be easily substituted for Class 8 tractors. Therefore, the agencies are proposing to continue to include both classes in the tractor category. The agencies believe that a shift from tractors to vocational vehicles would be limited because of the ability of tractors to pick up and drop off trailers at locations which cannot be done by vocational vehicles.

The agencies do not envision that the proposed regulatory program would cause class shifting within the vocational vehicle class. The marginal cost difference due to the regulation of vocational vehicles is minimal. The cost of LRR tires on a per tire basis is the same for all vocational vehicles so the only difference in marginal cost of the vehicles is due to the number of axles. The agencies believe that the utility gained from the additional load carrying capability of the additional axle would outweigh the additional cost for heavier vehicles.<sup>686</sup>

In conclusion, NHTSA and EPA believe that the proposed regulatory structure for HD trucks would not significantly change the current competitive and market factors that determine purchaser preferences among truck types. Furthermore, even if a small amount of shifting would occur, any resulting GHG impacts would likely to be negligible because any vehicle class that sees an uptick in sales is also being regulated for fuel efficiency. Therefore, the agencies did not include an impact of class shifting on the vehicle populations used to assess the benefits of the proposed program.

<sup>686</sup> The proposed rule projects the difference in costs between the HHD and MHD vocational vehicle technologies is approximately \$30.



## (2) Fleet Turnover and Sales Effects

A regulation that affects the cost to purchase and/or operate trucks could affect whether a consumer decides to purchase a new truck and the timing of that purchase. The term pre-buy refers to the idea that truck purchases may occur earlier than otherwise planned to avoid the additional costs associated with a new regulatory requirement. Slower fleet turnover, or low-buys, may occur when owners opt to keep their existing truck rather than purchase a new truck due to the incremental cost of the regulation.

The 2010 NAS HD Report discussed the topics associated with HD truck fleet turnover. NAS noted that there is some empirical evidence of pre-buy behavior in response to the 2004 and 2007 heavy-duty engine emission standards, with larger impacts occurring in response to higher costs.<sup>687</sup> However, those regulations increased upfront costs to firms without any offsetting future cost savings from reduced fuel purchases. In summary, NAS stated that:

. . . during periods of stable or growing demand in the freight sector, pre-buy behavior may have significant impact on purchase patterns, especially for larger fleets with better access to capital and financing. Under these same conditions, smaller operators may simply elect to keep their current equipment on the road longer, all the more likely given continued improvements in diesel engine durability over time. On the other hand, to the extent that fuel economy improvements can offset incremental purchase costs, these impacts will be lessened. Nevertheless, when it comes to efficiency investments, most heavy-duty fleet operators require relatively quick payback periods, on the order of two to three years.<sup>688</sup>

The proposed regulations are projected to return fuel savings to the truck owners that offset the cost of the regulation within a few years. The effects of the regulation on purchasing behavior and sales will depend on the nature of the market failures and the extent to which firms consider the projected future fuel savings in their purchasing decisions.

If trucking firms account for the rapid payback, they are unlikely to strategically accelerate or delay their purchase plans at additional cost in

capital to avoid a regulation that will lower their overall operating costs. As discussed in Section IX. A. this scenario may occur if this proposed program reduces uncertainty about fuel-saving technologies. More reliable information about ways to reduce fuel consumption allows truck purchasers to evaluate better the benefits and costs of additional fuel savings, primarily in the original vehicle market, but possibly in the resale market as well. In addition, the proposed standards are expected to lead manufacturers to install more fuel-saving technologies and promote their purchase; the increased availability and promotion may encourage sales.

Other market failures may leave open the possibility of some pre-buy or delayed purchasing behavior. Firms may not consider the full value of the future fuel savings for several reasons. For instance, truck purchasers may not want to invest in fuel efficiency because of uncertainty about fuel prices. Another explanation is that the resale market may not fully recognize the value of fuel savings, due to lack of trust of new technologies or changes in the uses of the vehicles. Lack of coordination (also called split incentives—see Section IX. A.) between truck purchasers (who may emphasize the up-front costs of the trucks) and truck operators, who would like the fuel savings, can also lead to pre-buy or delayed purchasing behavior. If these market failures prevent firms from fully internalizing fuel savings when deciding on vehicle purchases, then pre-buy and delayed purchase could occur and could result in a slight decrease in the GHG benefits of the regulation.

Thus, whether pre-buy or delayed purchase is likely to play a significant role in the truck market depends on the specific behaviors of purchasers in that market. Without additional information about which scenario is more likely to be prevalent, the agencies are not projecting a change in fleet turnover characteristics due to this regulation.

Whether vehicle sales appear to be affected by the HD Phase 1 standards could provide some insight into the impacts of the proposed standards. At the time of this proposed rule, sales data are not yet available for 2014 model year, the first year of the Phase 1 standards. In addition, any trends in sales are likely to be affected by macroeconomic conditions, which have been recovering since 2009–2010. As a result, it is unlikely to be possible, even when vehicle sales data are available, to separate the effects of the existing standards from other confounding factors.

## G. Monetized GHG Impacts

(1) Monetized CO<sub>2</sub> Impacts—The Social Cost of Carbon (SC-CO<sub>2</sub>)

We estimate the global social benefits of CO<sub>2</sub> emission reductions expected from the proposed heavy-duty GHG and fuel efficiency standards using the social cost of carbon (SC-CO<sub>2</sub>) estimates presented in the 2013 *Technical Support Document: Technical Update of the Social Cost of Carbon for Regulatory Impact Analysis Under Executive Order 12866* (2013 SCC TSD).<sup>689</sup> (The SC-CO<sub>2</sub> estimates are presented in Table IX–11). We refer to these estimates, which were developed by the U.S. government, as “SC-CO<sub>2</sub> estimates.” The SC-CO<sub>2</sub> is a metric that estimates the monetary value of impacts associated with marginal changes in CO<sub>2</sub> emissions in a given year. It includes a wide range of anticipated climate impacts, such as net changes in agricultural productivity and human health, property damage from increased flood risk, and changes in energy system costs, such as reduced costs for heating and increased costs for air conditioning. It is used in regulatory impact analyses to quantify the benefits of reducing CO<sub>2</sub> emissions, or the disbenefit from increasing emissions.

The SC-CO<sub>2</sub> estimates used in this analysis were developed over many years, using the best science available, and with input from the public. Specifically, an interagency working group (IWG) that included EPA, DOT, and other executive branch agencies and offices used three integrated assessment models (IAMs) to develop the SC-CO<sub>2</sub> estimates and recommended four global values for use in regulatory analyses. The SC-CO<sub>2</sub> estimates were first released in February 2010<sup>690</sup> and

<sup>689</sup> Docket ID EPA-HQ-OAR-2014-0827, *Technical Support Document: Technical Update of the Social Cost of Carbon for Regulatory Impact Analysis Under Executive Order 12866*, Interagency Working Group on Social Cost of Carbon, with participation by Council of Economic Advisers, Council on Environmental Quality, Department of Agriculture, Department of Commerce, Department of Energy, Department of Transportation, Environmental Protection Agency, National Economic Council, Office of Energy and Climate Change, Office of Management and Budget, Office of Science and Technology Policy, and Department of Treasury (May 2013, Revised November 2013). Available at: <http://www.whitehouse.gov/sites/default/files/omb/assets/inforeg/technical-update-social-cost-of-carbon-for-regulator-impact-analysis.pdf>.

<sup>690</sup> Docket ID EPA-HQ-OAR-2009-0472–114577, *Technical Support Document: Social Cost of Carbon for Regulatory Impact Analysis Under Executive Order 12866*, Interagency Working Group on Social Cost of Carbon, with participation by the Council of Economic Advisers, Council on Environmental Quality, Department of Agriculture, Department of Commerce, Department of Energy, Department of Transportation, Environmental Protection Agency, National Economic Council,

<sup>687</sup> Committee to Assess Fuel Economy Technologies for Medium- and Heavy-Duty Vehicles; National Research Council; Transportation Research Board (2010). “Technologies and Approaches to Reducing the Fuel Consumption of Medium- and Heavy-Duty Vehicles,” (hereafter, “NAS Report”). Washington, DC, the National Academies Press. Available electronically from the National Academies Press Web site at [http://www.nap.edu/catalog.php?record\\_id=12845](http://www.nap.edu/catalog.php?record_id=12845). pp. 150–151.

<sup>688</sup> See NAS Report, Note 687, page 151.

updated in 2013 using new versions of each IAM. These estimates were published in the 2013 SCC TSD. The 2013 update did not revisit the 2010 modeling decisions (*e.g.*, with regard to the discount rate, reference case socioeconomic and emission scenarios or equilibrium climate sensitivity). Rather, improvements in the way damages are modeled are confined to those that have been incorporated into the latest versions of the models by the developers themselves and used for analyses in peer-reviewed publications. The 2010 SCC Technical Support Document (2010 SCC TSD) provides a complete discussion of the methods used to develop these estimates and the 2013 SCC TSD presents and discusses the updated estimates.

The 2010 SCC TSD noted a number of limitations to the SC-CO<sub>2</sub> analysis, including the incomplete way in which the IAMs capture catastrophic and non-catastrophic impacts, their incomplete treatment of adaptation and technological change, uncertainty in the extrapolation of damages to high temperatures, and assumptions regarding risk aversion. Current IAMs do not assign value to all of the important physical, ecological, and economic impacts of climate change recognized in the climate change literature due to a lack of precise information on the nature of damages and because the science incorporated into these models understandably lags behind the most recent research. Nonetheless, these estimates and the discussion of their limitations represent the best available information about the

social benefits of CO<sub>2</sub> reductions to inform benefit-cost analysis; see RIA of this rule and the SCC TSDs for additional details. The new versions of the models used to estimate the values presented below offer some improvements in these areas, although further work is warranted.

Accordingly, EPA and other agencies continue to engage in research on modeling and valuation of climate impacts with the goal to improve these estimates. The EPA and other federal agencies have considered the extensive public comments on ways to improve SC-CO<sub>2</sub> estimation received via the notice and comment periods that were part of numerous rulemakings. In addition, OMB's Office of Information and Regulatory Affairs sought public comment on the approach used to develop the SC-CO<sub>2</sub> estimates (78 FR 70586, November 26, 2013). The comment period ended on February 26, 2014, and OMB is reviewing the comments received. OMB also responded in January 2014 to concerns submitted in a Request for Correction on the SCC TSDs.<sup>691</sup>

The four global SC-CO<sub>2</sub> estimates, updated in 2013, are as follows: \$13, \$46, \$68, and \$140 per metric ton of CO<sub>2</sub> emissions in the year 2020 (2012\$).<sup>692</sup> The first three values are based on the average SC-CO<sub>2</sub> from the three IAMs, at discount rates of 5, 3, and 2.5 percent, respectively. SC-CO<sub>2</sub> estimates for several discount rates are included because the literature shows that the SC-CO<sub>2</sub> is quite sensitive to assumptions about the discount rate, and because no consensus exists on the

appropriate rate to use in an intergenerational context (where costs and benefits are incurred by different generations). The fourth value is the 95th percentile of the SC-CO<sub>2</sub> from all three models at a 3 percent discount rate. It is included to represent higher-than-expected impacts from temperature change further out in the tails of the SC-CO<sub>2</sub> distribution (representing less likely, but potentially catastrophic, outcomes). The SC-CO<sub>2</sub> increases over time because future emissions are expected to produce larger incremental damages as economies grow and physical and economic systems become more stressed in response to greater climate change. The SC-CO<sub>2</sub> values are presented in Table IX-11.

Applying the global SC-CO<sub>2</sub> estimates, shown in Table IX-13, to the estimated reductions in domestic CO<sub>2</sub> emissions for the proposed program, yields estimates of the dollar value of the climate related benefits for each analysis year. These estimates are then discounted back to the analysis year using the same discount rate used to estimate the SC-CO<sub>2</sub>. For internal consistency, the annual benefits are discounted back to net present value terms using the same discount rate as each SC-CO<sub>2</sub> estimate (*i.e.* 5 percent, 3 percent, and 2.5 percent) rather than the discount rates of 3 percent and 7 percent used to derive the net present value of other streams of costs and benefits of the proposed rule.<sup>693</sup> The SC-CO<sub>2</sub> benefit estimates for each calendar year are shown in Table IX-14. The SC-CO<sub>2</sub> benefit estimates for each model year are shown in Table IX-15.

TABLE IX-13—SOCIAL COST OF CO<sub>2</sub>, 2012–2050<sup>a</sup>  
(in 2012\$ per metric ton)

Calendar year	5% Average	3% Average	2.5% Average	3%, 95th Percentile
2012 .....	\$12	\$37	\$58	\$100
2015 .....	12	40	61	120
2020 .....	13	46	69	140
2025 .....	15	51	74	150
2030 .....	17	56	81	170
2035 .....	20	60	86	190
2040 .....	23	66	93	210
2045 .....	26	71	99	220
2050 .....	28	77	100	240

**Note:**

<sup>a</sup> The SC-CO<sub>2</sub> values are dollar-year and emissions-year specific and have been rounded to two significant digits. Unrounded numbers from the 2013 SCC TSD were used to calculate the CO<sub>2</sub> benefits.

Office of Energy and Climate Change, Office of Management and Budget, Office of Science and Technology Policy, and Department of Treasury (February 2010). Also available at: <http://www.whitehouse.gov/sites/default/files/omb/inforeg/for-agencies/Social-Cost-of-Carbon-for-RIA.pdf>.

<sup>691</sup> OMB's 1/24/14 response to the petition is available at <https://www.whitehouse.gov/sites/default/files/omb/inforeg/ssc-rfc-under-iga-response.pdf>.

<sup>692</sup> The 2013 SCC TSD presents the SC-CO<sub>2</sub> estimates in \$2007. These estimates were adjusted to 2012\$ using the GDP Implicit Price Deflator. Bureau of Economic Analysis, Table 1.1.9 Implicit

Price Deflators for Gross Domestic Product; last revised on March 27, 2014.

<sup>693</sup> See more discussion on the appropriate discounting of climate benefits using SC-CO<sub>2</sub> in the 2010 SCC TSD. Other benefits and costs of proposed regulations unrelated to CO<sub>2</sub> emissions are discounted at the 3% and 7% rates specified in OMB guidance for regulatory analysis.

TABLE IX-14—UPSTREAM AND DOWNSTREAM ANNUAL CO<sub>2</sub> BENEFITS FOR THE GIVEN SC-CO<sub>2</sub> VALUE <sup>a</sup> USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE  
[millions of 2012\$]<sup>b</sup>

Calendar year	5% Average	3% Average	2.5% Average	3%, 95th Percentile
2018 .....	\$13	\$43	\$65	\$130
2019 .....	26	91	130	270
2020 .....	40	140	210	420
2021 .....	92	330	500	1,000
2022 .....	170	590	880	1,800
2023 .....	250	860	1,300	2,600
2024 .....	400	1,300	1,900	4,000
2025 .....	540	1,800	2,600	5,500
2026 .....	720	2,300	3,400	7,000
2027 .....	890	2,900	4,200	8,900
2028 .....	1,100	3,500	5,100	11,000
2029 .....	1,300	4,200	5,900	13,000
2030 .....	1,500	4,800	6,900	15,000
2035 .....	2,500	7,400	11,000	23,000
2040 .....	3,300	9,700	14,000	30,000
2050 .....	5,000	14,000	19,000	42,000
NPV .....	22,000	100,000	160,000	320,000

**Notes:**

<sup>a</sup> The SC-CO<sub>2</sub> values are dollar-year and emissions-year specific.

<sup>b</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE IX-15—UPSTREAM AND DOWNSTREAM DISCOUNTED MODEL YEAR LIFETIME CO<sub>2</sub> BENEFITS FOR THE GIVEN SC-CO<sub>2</sub> VALUE USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE  
[millions of 2012\$]<sup>a, b</sup>

Model year	5% Average	3% Average	2.5% Average	3%, 95th Percentile
2018 .....	\$93	\$380	\$580	\$1,100
2019 .....	90	370	570	1,100
2020 .....	87	360	560	1,100
2021 .....	520	2,200	3,400	6,600
2022 .....	540	2,300	3,500	6,900
2023 .....	550	2,300	3,600	7,200
2024 .....	870	3,700	5,800	11,000
2025 .....	900	3,900	6,100	12,000
2026 .....	920	4,000	6,300	12,000
2027 .....	1,100	4,800	7,600	15,000
2028 .....	1,100	4,800	7,600	15,000
2029 .....	1,100	4,900	7,700	15,000
Sum .....	7,800	34,000	53,000	100,000

**Notes:**

<sup>a</sup> The SC-CO<sub>2</sub> values are dollar-year and emissions-year specific.

<sup>b</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

## (2) Sensitivity Analysis—Monetized Non-CO<sub>2</sub> GHG Impacts

One limitation of the primary benefits analysis is that it does not include the valuation of non-CO<sub>2</sub> GHG impacts (*e.g.*, CH<sub>4</sub>, N<sub>2</sub>O, HFC-134a). Specifically, the 2010 and 2013 SCC TSDs do not include estimates of the social costs of non-CO<sub>2</sub> GHG emissions using an approach analogous to the one used to estimate the SC-CO<sub>2</sub>. However, EPA recognizes that non-CO<sub>2</sub> GHG impacts associated with this rulemaking (*e.g.*, net reductions in CH<sub>4</sub>, N<sub>2</sub>O, and HFC-134a) would provide additional benefits to society. To understand the potential

implication of omitting these benefits, EPA has conducted sensitivity analysis using two approaches: (1) An approximation approach based on the global warming potentials (GWP) of non-CO<sub>2</sub> GHGs, which has been used in previous rulemakings, and (2) a set of recently published SC-CH<sub>4</sub> and SC-N<sub>2</sub>O estimates that are consistent with the modeling assumptions underlying the SC-CO<sub>2</sub> estimates (Marten et al. 2014). This section presents estimates of the non-CO<sub>2</sub> benefits of the proposed rulemaking using both approaches. Other unquantified non-CO<sub>2</sub> benefits are discussed in this section as well.

Additional details are provided in the RIA of these rules.

Currently, EPA is undertaking a peer review of the application of the Marten et al. (2014) non-CO<sub>2</sub> social cost estimates in regulatory analysis. Pending a favorable peer review, EPA plans to include monetized benefits of CH<sub>4</sub> and N<sub>2</sub>O emission reductions in the main benefit-cost analysis of the RIA for the final rule, using the directly modeled estimates of SC-CH<sub>4</sub> and SC-N<sub>2</sub>O from Marten et al. EPA seeks comments on the use of directly modeled estimates for the social cost of non-CO<sub>2</sub> GHGs.

(a) Non-CO<sub>2</sub> GHG Benefits Based on the GWP Approximation Approach

In the absence of directly modeled estimates, one potential method for approximating the value of marginal non-CO<sub>2</sub> GHG emission reductions is to convert non-CO<sub>2</sub> emissions reductions to CO<sub>2</sub>-equivalents that may then be valued using the SC-CO<sub>2</sub>. Conversion to CO<sub>2</sub>-equivalents is typically based on the global warming potentials (GWPs) for the non-CO<sub>2</sub> gases. This approach, henceforth referred to as the “GWP approach,” has been used in sensitivity analyses to estimate the non-CO<sub>2</sub> benefits in previous EPA rulemakings (see U.S. EPA 2012, 2013).<sup>694</sup> EPA has not presented these estimates in a main benefit-cost analysis due to the limitations associated with using the GWP approach to value changes in non-CO<sub>2</sub> GHG emissions, and considered the GWP approach as an interim method of analysis until social cost estimates for non-CO<sub>2</sub> GHGs, consistent with the SC-CO<sub>2</sub> estimates, were developed.

The GWP is a simple, transparent, and well-established metric for assessing the relative impacts of non-CO<sub>2</sub> emissions compared to CO<sub>2</sub> on a purely physical basis. However, as discussed both in the 2010 SCC TSD and previous rulemakings (e.g., U.S. EPA 2012, 2013), the GWP approximation approach to measuring non-CO<sub>2</sub> GHG benefits has several well-documented limitations. These metrics are not ideally suited for use in benefit-cost analyses to approximate the social cost of non-CO<sub>2</sub> GHGs because the approach would assume all subsequent linkages leading to damages are linear in radiative forcing, which would be inconsistent with the most recent scientific literature. Detailed discussion of limitations of the GWP approach can be found in the RIA.

Similar to the approach used in the RIA of the *Final Rulemaking for 2017–2025 Light-Duty Vehicle Greenhouse Gas Emission Standards and Corporate Average Fuel Economy Standards* (U.S. EPA, 2013), EPA applies the GWP

approach to estimate the benefits associated with reductions of CH<sub>4</sub>, N<sub>2</sub>O and HFCs in each calendar year. Under the GWP Approach, EPA converted CH<sub>4</sub>, N<sub>2</sub>O and HFC-134a to CO<sub>2</sub> equivalents using the AR4 100-year GWP for each gas: CH<sub>4</sub> (25), N<sub>2</sub>O (298), and HFC-134a (1,430).<sup>695</sup> These CO<sub>2</sub>-equivalent emission reductions are multiplied by the SC-CO<sub>2</sub> estimate corresponding to each year of emission reductions. As with the calculation of annual benefits of CO<sub>2</sub> emission reductions, the annual benefits of non-CO<sub>2</sub> emission reductions based on the GWP approach are discounted back to net present value terms using the same discount rate as each SC-CO<sub>2</sub> estimate. The estimated non-CO<sub>2</sub> GHG benefits using the GWP approach are presented in Table IX–16 through Table IX–18. The total net present value of the GHG benefits for this proposed rulemaking would increase by about \$760 million to \$11 billion (2012\$), depending on discount rate, or roughly 3 percent if these non-CO<sub>2</sub> estimates were included.

TABLE IX–16—ANNUAL UPSTREAM AND DOWNSTREAM CH<sub>4</sub> BENEFITS FOR THE GIVEN SC-CO<sub>2</sub> VALUE USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE, USING THE GWP APPROACH<sup>a b</sup>  
[Millions of 2012\$]<sup>b</sup>

Calendar year	CH <sub>4</sub>			
	5% Average	3% Average	2.5% Average	3%, 95th Percentile
2018 .....	\$0.3	\$1.1	\$1.6	\$3.2
2019 .....	0.6	2.2	3.3	6.6
2020 .....	1.0	3.5	5.2	10
2021 .....	3.1	11	17	33
2022 .....	6.0	20	30	62
2023 .....	8.8	30	45	93
2024 .....	14	46	68	140
2025 .....	19	62	91	190
2026 .....	25	79	120	240
2027 .....	30	99	140	300
2028 .....	36	120	170	360
2029 .....	43	140	200	420
2030 .....	49	160	230	480
2035 .....	82	240	350	760
2040 .....	110	320	440	990
2050 .....	160	440	600	1,400
NPV .....	730	3,400	5,400	11,000

**Notes:**

<sup>a</sup> The SC-CO<sub>2</sub> values are dollar-year and emissions-year specific

<sup>b</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>694</sup> U.S. EPA. (2012). “Regulatory impact analysis supporting the 2012 U.S. Environmental Protection Agency final new source performance standards and amendments to the national emission standards for hazardous air pollutants for the oil and natural

gas industry.” Retrieved from [http://www.epa.gov/ttn/ecas/regdata/RIAs/oil\\_natural\\_gas\\_final\\_neshap\\_nspas\\_ria.pdf](http://www.epa.gov/ttn/ecas/regdata/RIAs/oil_natural_gas_final_neshap_nspas_ria.pdf).

<sup>695</sup> Source: Table 2.14 (Errata). Lifetimes, radiative efficiencies and direct (except for CH<sub>4</sub>)

GWPs relative to CO<sub>2</sub>. IPCC Fourth Assessment Report “Climate Change 2007: Working Group I: The Physical Science Basis.”

TABLE IX–17—ANNUAL UPSTREAM AND DOWNSTREAM N<sub>2</sub>O BENEFITS FOR THE GIVEN SC-CO<sub>2</sub> VALUE USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE, USING THE GWP APPROACH <sup>a b</sup>  
[Millions of 2012\$]<sup>b</sup>

Calendar year	N <sub>2</sub> O			
	5% Average	3% Average	2.5% Average	3%, 95th Percentile
2018 .....	\$0.0	\$0.0	\$0.1	\$0.2
2019 .....	0.0	0.1	0.2	0.3
2020 .....	0.0	0.2	0.2	0.5
2021 .....	0.1	0.4	0.5	1.1
2022 .....	0.2	0.6	1.0	1.9
2023 .....	0.3	0.9	1.4	2.8
2024 .....	0.4	1.4	2.1	4.4
2025 .....	0.6	2.0	2.9	6.0
2026 .....	0.8	2.6	3.7	7.8
2027 .....	1.0	3.2	4.7	10
2028 .....	1.2	3.9	5.7	12
2029 .....	1.5	4.6	6.6	14
2030 .....	1.6	5.3	7.7	16
2035 .....	2.8	8.3	12	26
2040 .....	3.8	11	15	34
2050 .....	5.6	15	21	47
NPV .....	25	120	180	360

**Notes:**

<sup>a</sup> The SC-CO<sub>2</sub> values are dollar-year and emissions-year specific.

<sup>b</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE IX–18—ANNUAL UPSTREAM AND DOWNSTREAM HFC–134A BENEFITS FOR THE GIVEN SC-CO<sub>2</sub> VALUE USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE, USING THE GWP APPROACH <sup>a b</sup>  
[Millions of 2012\$]<sup>b</sup>

Calendar year	HFC–134a			
	5% Average	3% Average	2.5% Average	3%, 95th Percentile
2018 .....	\$0.0	\$0.0	\$0.0	\$0.0
2019 .....	0.0	0.0	0.0	0.0
2020 .....	0.0	0.0	0.0	0.0
2021 .....	0.2	0.8	1.3	2.6
2022 .....	0.5	1.7	2.6	5.3
2023 .....	0.8	2.7	4.0	8.1
2024 .....	1.1	3.7	5.4	11
2025 .....	1.4	4.7	6.9	14
2026 .....	1.8	5.9	8.6	18
2027 .....	2.2	7.1	10	22
2028 .....	2.5	8.3	12	25
2029 .....	3.0	10	14	29
2030 .....	3.4	11	16	34
2035 .....	5.2	15	22	48
2040 .....	6.1	18	25	56
2050 .....	8.4	23	31	71
NPV .....	44	200	320	630

**Notes:**

<sup>a</sup> The SC-CO<sub>2</sub> values are dollar-year and emissions-year specific.

<sup>b</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

#### (b) Non-CO<sub>2</sub> GHG Benefits Based on Directly Modeled Estimates

Several researchers have directly estimated the social cost of non-CO<sub>2</sub> emissions using integrated assessment models (IAMs), though the number of such estimates is small compared to the large number of SC-CO<sub>2</sub> estimates available in the literature. As discussed

in previous RIAs (*e.g.*, EPA 2012), there is considerable variation among these published estimates in the models and input assumptions they employ. These studies differ in the emission perturbation year, employ a wide range of constant and variable discount rate specifications, and consider a range of baseline socioeconomic and emissions scenarios that have been developed over

the last 20 years. However, none of the other published estimates of the social cost of non-CO<sub>2</sub> GHG are consistent with the SC-CO<sub>2</sub> estimates, and most are likely underestimates due to changes in the underlying science since their publication.

Recently, a paper by Marten *et al.* (2014) provided the first set of published SC-CH<sub>4</sub> and SC-N<sub>2</sub>O

estimates that are consistent with the modeling assumptions underlying the SC-CO<sub>2</sub>.<sup>696</sup> Specifically, the estimation approach of Marten *et al.* (2014) used the same set of three IAMs, five socioeconomic-emissions scenarios,

equilibrium climate sensitivity distribution, three constant discount rates, and aggregation approach used to develop the SC-CO<sub>2</sub> estimates.

The resulting SC-CH<sub>4</sub> and SC-N<sub>2</sub>O estimates are presented in Table IX–19. More detailed discussion of their

methodology, results and a comparison to other published estimates can be found in the RIA and in Marten *et al.* (2014). The tables do not include HFC–134a because EPA is unaware of analogous estimates.

TABLE IX–19—SOCIAL COST OF CH<sub>4</sub> AND N<sub>2</sub>O, 2012–2050<sup>a</sup> [IN 2012\$ PER METRIC TON]

[Source: Marten *et al.*, 2014]

Year	SC-CH <sub>4</sub>				SC-N <sub>2</sub> O			
	5% Average	3% Average	2.5% Average	3% 95th percentile	5% Average	3% Average	2.5% Average	3% 95th percentile
2012 .....	\$440	\$1,000	\$1,400	\$2,800	\$4,000	\$14,000	\$20,000	\$37,000
2015 .....	500	1,200	1,500	3,100	4,400	15,000	22,000	39,000
2020 .....	590	1,300	1,700	3,500	5,200	16,000	24,000	44,000
2025 .....	710	1,500	19,000	4,100	6,000	18,000	27,000	50,000
2030 .....	840	1,700	2,300	4,600	7,000	20,000	29,000	55,000
2035 .....	990	2,000	2,500	5,400	8,100	23,000	32,000	61,000
2040 .....	1,200	2,300	2,800	6,000	9,300	25,000	35,000	67,000
2045 .....	1,300	2,500	3,100	6,800	11,000	27,000	38,000	73,000
2050 .....	1,500	2,700	3,300	7,400	12,000	29,000	41,000	80,000

**Note:**

<sup>a</sup> The values are emissions-year specific and have been rounded to two significant digits. Unrounded numbers were used to calculate the GHG benefits.

The application of directly modeled estimates from Marten *et al.* (2014) to benefit-cost analysis of a regulatory action is analogous to the use of the SC-CO<sub>2</sub> estimates. Specifically, the SC-CH<sub>4</sub> and SC-N<sub>2</sub>O estimates in Table IX–19 are used to monetize the benefits of changes in CH<sub>4</sub> and N<sub>2</sub>O emissions expected as a result of the proposed rulemaking. Forecast changes in CH<sub>4</sub>

and N<sub>2</sub>O emissions in a given year resulting from the regulatory action are multiplied by the SC-CH<sub>4</sub> and SC-N<sub>2</sub>O estimate for that year, respectively. To obtain a present value estimate, the monetized stream of future non-CO<sub>2</sub> benefits are discounted back to the analysis year using the same discount rate used to estimate the social cost of the non-CO<sub>2</sub> GHG emission changes.

The CH<sub>4</sub> and N<sub>2</sub>O benefits based on Marten *et al.* (2014) are presented for each calendar year in Table IX–20. Including these benefits would increase the total net present value of the GHG benefits for this proposed rulemaking by about \$1.5 billion to \$12 billion (2012\$), or roughly 4 to 7 percent, depending on discount rate.

TABLE IX–20—ANNUAL UPSTREAM AND DOWNSTREAM NON-CO<sub>2</sub> GHG BENEFITS FOR THE GIVEN SC-NON-CO<sub>2</sub> VALUE USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE, USING THE DIRECTLY MODELED APPROACH<sup>a b</sup>

[Millions of 2012\$]<sup>c</sup>

Calendar year	CH <sub>4</sub>				N <sub>2</sub> O			
	5% Average	3% Average	2.5% Average	3% 95th percentile	5% Average	3% Average	2.5% Average	3% 95th percentile
2018 .....	\$0.6	\$1.3	\$1.6	\$3.3	\$0.0	\$0.1	\$0.1	\$0.2
2019 .....	1.1	2.6	3.4	6.8	0.0	0.1	0.2	0.3
2020 .....	1.8	3.9	5.2	10	0.1	0.2	0.3	0.5
2021 .....	5.8	13	17	35	0.1	0.4	0.6	1.2
2022 .....	11	24	31	65	0.3	0.8	1.1	2.1
2023 .....	17	35	49	97	0.4	1.1	1.7	3.1
2024 .....	26	56	72	150	0.6	1.8	2.5	4.7
2025 .....	35	74	95	200	0.8	2.4	3.5	6.5
2026 .....	46	99	130	260	1.0	3.0	4.5	8.4
2027 .....	57	120	150	320	1.3	4.0	5.8	11
2028 .....	69	140	190	390	1.6	4.8	6.9	13
2029 .....	82	170	220	460	1.9	5.8	8.2	15
2030 .....	95	190	260	520	2.2	6.5	9.3	18
2035 .....	160	330	400	870	3.7	10	15	28
2040 .....	230	430	540	1,200	5.2	14	19	37
2050 .....	350	620	770	1,700	7.9	20	27	53
NPV .....	1,500	4,600	6,400	12,000	34	150	230	400

**Notes:**

<sup>696</sup> Marten, A.L., E.A. Kopits, C.W. Griffiths, S.C. Newbold & A. Wolverton (2014). Incremental CH<sub>4</sub>

and N<sub>2</sub>O mitigation benefits consistent with the

U.S. Government's SC-CO<sub>2</sub> estimates, *Climate Policy*, DOI: 10.1080/14693062.2014.912981.

<sup>a</sup> The SC-CH<sub>4</sub> and SC-N<sub>2</sub>O values are dollar-year and emissions-year specific.

<sup>b</sup> Note that net present discounted values of reduced GHG emissions are calculated differently than other benefits. The same discount rate used to discount the value of damages from future emissions (SC-CH<sub>4</sub> and SC-N<sub>2</sub>O at 5, 3, and 2.5 percent) is used to calculate net present value discounted values of SC-CH<sub>4</sub> and SC-N<sub>2</sub>O for internal consistency. Refer to SCC TSD for more detail.

<sup>c</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

As illustrated above, compared to the use of directly modeled estimates the GWP-based approximation approach underestimates the climate benefits of the CH<sub>4</sub> emission reductions by 12 percent to 52 percent and the climate benefits of N<sub>2</sub>O reductions by 10 percent to 26 percent, depending on the discount rate assumption.

#### (c) Additional Non-CO<sub>2</sub> GHGs Co-Benefits

In determining the relative social costs of the different gases, the Marten *et al.* (2014) analysis accounts for differences in lifetime and radiative efficiency between the non-CO<sub>2</sub> GHGs and CO<sub>2</sub>. The analysis also accounts for radiative forcing resulting from methane's effects on tropospheric ozone and stratospheric water vapor, and for at least some of the fertilization effects of elevated carbon dioxide concentrations. However, there exist several other differences between these gases that have not yet been captured in this analysis, namely the non-radiative effects of methane-driven elevated tropospheric ozone levels on human health, agriculture, and ecosystems, and the effects of carbon dioxide on ocean acidification. Inclusion of these additional non-radiative effects would potentially change both the absolute and relative value of the various gases.

Of these effects, the human health effect of elevated tropospheric ozone levels resulting from methane emissions is the closest to being monetized in a way that would be comparable to the SCC. Premature ozone-related cardiopulmonary deaths resulting from global increases in tropospheric ozone concentrations produced by the methane oxidation process have been the focus of a number of studies over the past decade (*e.g.*, West *et al.* 2006<sup>697</sup>). Recent studies have produced an estimate of a monetized benefit of methane emissions reductions, with results on the order of \$1,000 per metric ton of CH<sub>4</sub> emissions reduced (Anenberg

*et al.* 2012<sup>698</sup>; Shindell *et al.* 2012<sup>699</sup>), an estimate similar in magnitude to the climate benefits of CH<sub>4</sub> reductions estimated by the Marten *et al.* or GWP methods. However, though EPA is continuing to monitor this area of research as it evolves, EPA is not applying them for benefit estimates at this time.

#### H. Monetized Non-GHG Health Impacts

This section analyzes the economic benefits from reductions in health and environmental impacts resulting from non-GHG emission reductions that can be expected to occur as a result of the proposed Phase 2 standards. CO<sub>2</sub> emissions are predominantly the byproduct of fossil fuel combustion processes that also produce criteria and hazardous air pollutant emissions. The vehicles that are subject to the proposed standards are also significant sources of mobile source air pollution such as direct PM, NO<sub>x</sub>, VOCs and air toxics. The proposed standards would affect exhaust emissions of these pollutants from vehicles and would also affect emissions from upstream sources that occur during the refining and distribution of fuel. Changes in ambient concentrations of ozone, PM<sub>2.5</sub>, and air toxics that would result from the proposed standards are expected to affect human health by reducing premature deaths and other serious human health effects, as well as other important improvements in public health and welfare.

It is important to quantify the health and environmental impacts associated with the proposed standards because a failure to adequately consider these ancillary impacts could lead to an incorrect assessment of their costs and benefits. Moreover, the health and other impacts of exposure to criteria air pollutants and airborne toxics tend to occur in the near term, while most effects from reduced climate change are

likely to occur only over a time frame of several decades or longer.

Although EPA typically quantifies and monetizes the health and environmental impacts related to both PM and ozone in its regulatory impact analyses (RIAs), it was unable to do so in time for this proposal. Instead, EPA has applied PM-related "benefits per-ton" values to its estimated emission reductions as an interim approach to estimating the PM-related benefits of the proposal.<sup>700 701</sup> EPA also characterizes the health and environmental impacts that will be quantified and monetized for the final rulemaking.

This section is split into two subsections: the first presents the benefits-per-ton values used to monetize the benefits from reducing population exposure to PM associated with the proposed standards; the second explains what PM- and ozone-related health and environmental impacts EPA will quantify and monetize in the analysis for the final rule. EPA bases its analyses on peer-reviewed studies of air quality and health and welfare effects and peer-reviewed studies of the monetary values of public health and welfare improvements, and is generally consistent with benefits analyses performed for the analysis of the final Tier 3 Vehicle Rule,<sup>702</sup> the final 2012 p.m. NAAQS Revision,<sup>703</sup> and the final

<sup>700</sup> Fann, N., Baker, K.R., and Fulcher, C.M. (2012). *Characterizing the PM<sub>2.5</sub>-related health benefits of emission reductions for 17 industrial, area and mobile emission sectors across the U.S.*, Environment International, 49, 241–251, published online September 28, 2012.

<sup>701</sup> See also: <http://www.epa.gov/airquality/benmap/sabpt.html>. The current values available on the Web page have been updated since the publication of the Fann *et al.*, 2012 paper. For more information regarding the updated values, see: [http://www.epa.gov/airquality/benmap/models/Source\\_Apportionment\\_BPT\\_TSD\\_1\\_31\\_13.pdf](http://www.epa.gov/airquality/benmap/models/Source_Apportionment_BPT_TSD_1_31_13.pdf) (accessed September 9, 2014).

<sup>702</sup> U.S. Environmental Protection Agency. (2014). *Control of Air Pollution from Motor Vehicles: Tier 3 Motor Vehicle Emission and Fuel Standards Final Rule: Regulatory Impact Analysis*, Assessment and Standards Division, Office of Transportation and Air Quality, EPA-420-R-14-005, March 2014. Available on the Internet: <http://www.epa.gov/otaq/documents/tier3/420r14005.pdf>.

<sup>703</sup> U.S. Environmental Protection Agency. (2012). *Regulatory Impact Analysis for the Final Revisions to the National Ambient Air Quality Standards for Particulate Matter*, Health and Environmental Impacts Division, Office of Air Quality Planning and Standards, EPA-452-R-12-005, December 2012. Available on the Internet: <http://www.epa.gov/ttnecas1/regdata/RIAs/finalria.pdf>.

<sup>697</sup> West JJ, Fiore AM, Horowitz LW, Mauzerall DL (2006) Global health benefits of mitigating ozone pollution with methane emission controls. *Proc Natl Acad Sci USA* 103(11):3988–3993. doi:10.1073/pnas.0600201103.

<sup>698</sup> Anenberg SC, Schwartz J, Shindell D, Amann M, Faluvegi G, Klimont Z, . . . , Vignati E (2012) Global air quality and health co-benefits of mitigating near-term climate change through methane and black carbon emission controls. *Environ Health Perspect* 120(6):831. doi:10.1289/ehp.1104301.

<sup>699</sup> Shindell D, Kuylenstierna JCI, Vignati E, van Dingenen R, Amann M, Klimont Z, . . . , Fowler D (2012) Simultaneously Mitigating Near-Term Climate Change and Improving Human Health and Food Security. *Science* 335 (6065):183–189. doi:10.1126/science.1210026.

# 2017–2025 Light Duty Vehicle GHG Rule.<sup>704</sup>

Though EPA is characterizing the changes in emissions associated with toxic pollutants, we are not able to quantify or monetize the human health effects associated with air toxic pollutants for either the proposal or the final rule analyses (see Section VIII.G.1.b.iii for more information). Please refer to Section VIII for more information about the air toxics emissions impacts associated with the proposed standards.

## (1) Economic Value of Reductions in Criteria Pollutants

As described in Section VIII, the proposed standards would reduce emissions of several criteria and toxic pollutants and their precursors. In this analysis, EPA estimates the economic value of the human health benefits associated with the resulting reductions in PM<sub>2.5</sub> exposure. Due to analytical

limitations with the benefit per ton method, this analysis does not estimate benefits resulting from reductions in population exposure to other criteria pollutants such as ozone.<sup>705</sup> Furthermore, the benefits per-ton method, like all air quality impact analyses, does not monetize all of the potential health and welfare effects associated with reduced concentrations of PM<sub>2.5</sub>.

This analysis uses estimates of the benefits from reducing the incidence of the specific PM<sub>2.5</sub>-related health impacts described below. These estimates, which are expressed per ton of PM<sub>2.5</sub>-related emissions eliminated by the proposed rules, represent the monetized value of human health benefits (including reductions in both premature mortality and premature morbidity) from reducing each ton of directly emitted PM<sub>2.5</sub> or its precursors (SO<sub>2</sub> and NO<sub>x</sub>), from a specified source. Ideally,

the human health benefits would be estimated based on changes in ambient PM<sub>2.5</sub> as determined by full-scale air quality modeling. However, the length of time needed to prepare the necessary emissions inventories, in addition to the processing time associated with the modeling itself, has precluded us from performing air quality modeling for this proposal. We will conduct this modeling for the final rule.

The dollar-per-ton estimates used in this analysis are provided in Table IX–21. As the table indicates, these values differ among pollutants, and also depend on their original source, because emissions from different sources can result in different degrees of population exposure and resulting health impacts. In the summary of costs and benefits, Section IX.K of this preamble, EPA presents the monetized value of PM-related improvements associated with the proposal.

TABLE IX–21—BENEFITS-PER-TON VALUES  
[Thousands, 2012\$]<sup>a</sup>

Year <sup>c</sup>	On-road mobile sources			Upstream sources <sup>d</sup>		
	Direct PM <sub>2.5</sub>	SO <sub>2</sub>	NO <sub>x</sub>	Direct PM <sub>2.5</sub>	SO <sub>2</sub>	NO <sub>x</sub>
<b>Estimated Using a 3 Percent Discount Rate<sup>b</sup></b>						
2016 .....	\$380–\$850	\$20–\$45	\$7.7–\$18	\$330–\$750	\$69–\$160	\$6.8–\$16
2020 .....	400–910	22–49	8.1–18	350–790	75–170	7.4–17
2025 .....	440–1,000	24–55	8.8–20	390–870	83–190	8.1–18
2030 .....	480–1,100	27–61	9.6–22	420–950	91–200	8.7–20
<b>Estimated Using a 7 Percent Discount Rate<sup>b</sup></b>						
2016 .....	\$340–\$770	\$18–\$41	\$6.9–\$16	\$290–\$670	\$63–\$140	\$6.2–\$14
2020 .....	370–820	20–44	7.4–17	320–720	67–150	6.6–15
2025 .....	400–910	22–49	8.0–18	350–790	75–170	7.3–17
2030 .....	430–980	24–55	8.6–20	380–850	81–180	7.9–18

### Notes:

<sup>a</sup> The benefit-per-ton estimates presented in this table are based on a range of premature mortality estimates derived from the ACS study (Krewski et al., 2009) and the Six-Cities study (Lepeule et al., 2012). See Chapter VIII of the RIA for a description of these studies.

<sup>b</sup> The benefit-per-ton estimates presented in this table assume either a 3 percent or 7 percent discount rate in the valuation of premature mortality to account for a twenty-year segmented premature mortality cessation lag.

<sup>c</sup> Benefit-per-ton values were estimated for the years 2016, 2020, 2025 and 2030. We hold values constant for intervening years (e.g., the 2016 values are assumed to apply to years 2017–2019; 2020 values for years 2021–2024; 2030 values for years 2031 and beyond).

<sup>d</sup> We assume for the purpose of this analysis that total “upstream emissions” are most appropriately monetized using the refinery sector benefit per-ton values. The majority of upstream emission reductions associated with the proposed rule are related to domestic onsite refinery emissions and domestic crude production. While total upstream emissions also include storage and transport sources, as well as sources upstream from the refinery, we have chosen to simply apply the refinery values. Full-scale air quality modeling, and the associated benefits analysis, will include upstream emissions from all sources in the FRM.

The benefit-per-ton technique has been used in previous analyses,

including EPA’s 2017–2025 Light-Duty Vehicle Greenhouse Gas Rule,<sup>706</sup> the

Reciprocating Internal Combustion Engine rules,<sup>707 708</sup> and the Residential

<sup>704</sup> U.S. Environmental Protection Agency (U.S. EPA). (2012). *Regulatory Impact Analysis: Final Rulemaking for 2017–2025 Light-Duty Vehicle Greenhouse Gas Emission Standards and Corporate Average Fuel Economy Standards*, Assessment and Standards Division, Office of Transportation and Air Quality, EPA–420–R–12–016, August 2012. Available on the Internet at: <http://www.epa.gov/otaq/climate/documents/420r12016.pdf>.

<sup>705</sup> The air quality modeling that underlies the PM-related benefit per ton values also produced

estimates of ozone levels attributable to each sector. However, the complex non-linear chemistry governing ozone formation prevented EPA from developing a complementary array of ozone benefit per ton values. This limitation notwithstanding, we anticipate that the ozone-related benefits associated with reducing emissions of NO<sub>x</sub> and VOC could be substantial.

<sup>706</sup> U.S. Environmental Protection Agency (U.S. EPA). (2012). *Regulatory Impact Analysis: Final Rulemaking for 2017–2025 Light-Duty Vehicle*

*Greenhouse Gas Emission Standards and Corporate Average Fuel Economy Standards*, Assessment and Standards Division, Office of Transportation and Air Quality, EPA–420–R–12–016, August 2012. Available on the Internet at: <http://www.epa.gov/otaq/climate/documents/420r12016.pdf>.

<sup>707 708</sup> U.S. Environmental Protection Agency (U.S. EPA). (2013). *Regulatory Impact Analysis for the*



Wood Heaters NSPS.<sup>709</sup> Table IX–22 shows the quantified PM<sub>2.5</sub>-related co-

benefits captured in those benefit per-ton estimates, as well as unquantified

effects the benefit per-ton estimates are unable to capture.

TABLE IX–22—HUMAN HEALTH AND WELFARE EFFECTS OF PM<sub>2.5</sub>

Pollutant/ effect	Quantified and monetized in primary estimates	Unquantified effects Changes in:
PM <sub>2.5</sub> .....	Adult premature mortality ..... Acute bronchitis ..... Hospital admissions: Respiratory and cardiovascular .....  Emergency room visits for asthma ..... Nonfatal heart attacks (myocardial infarction) ..... Lower and upper respiratory illness ..... Minor restricted-activity days ..... Work loss days. Asthma exacerbations (asthmatic population). Infant mortality.	Chronic and subchronic bronchitis cases. Strokes and cerebrovascular disease. Low birth weight. Pulmonary function. Chronic respiratory diseases other than chronic bronchitis. Non-asthma respiratory emergency room visits. Visibility. Household soiling.

A more detailed description of the benefit-per-ton estimates is provided in Chapter VIII of the Draft RIA that accompanies this rulemaking. Readers interested in reviewing the complete methodology for creating the benefit-per-ton estimates used in this analysis can consult EPA's "Technical Support Document: Estimating the Benefit per Ton of Reducing PM<sub>2.5</sub> Precursors from 17 Sectors."<sup>710</sup> Readers can also refer to Fann et al. (2012)<sup>711</sup> for a detailed description of the benefit-per-ton methodology.

As Table IX–20 indicates, EPA projects that the per-ton values for reducing emissions of non-GHG pollutants from both vehicle use and upstream sources such as fuel refineries will increase over time.<sup>712</sup> These projected increases reflect rising income levels, which increase affected individuals' willingness to pay for reduced exposure to health threats from air pollution.<sup>713</sup> They also reflect future population growth and increased life expectancy, which expands the size of the population exposed to air pollution in both urban and rural areas, especially among older age groups with the highest mortality risk.<sup>714</sup>

## (2) Human Health and Environmental Benefits for the Final Rule

### (a) Human Health and Environmental Impacts

To model the ozone and PM air quality benefits of the final rule, EPA will use the Community Multiscale Air Quality (CMAQ) model (see Section VIII for a description of the CMAQ model). The modeled ambient air quality data will serve as an input to the Environmental Benefits Mapping and Analysis Program—Community Edition (BenMAP CE).<sup>715</sup> BenMAP CE is a computer program developed by EPA that integrates a number of the modeling elements used in previous RIAs (e.g., interpolation functions, population projections, health impact functions, valuation functions, analysis and pooling methods) to translate modeled air concentration estimates into health effects incidence estimates and monetized benefits estimates.

Chapter VIII in the DRIA that accompanies this proposal lists the co-pollutant health effect concentration-response functions EPA will use to quantify the non-GHG incidence impacts associated with the proposed heavy-duty vehicle standards. These

include PM- and ozone-related premature mortality, nonfatal heart attacks, hospital admissions (respiratory and cardiovascular), emergency room visits, acute bronchitis, minor restricted activity days, and days of work and school lost.

### (b) Monetized Impacts

To calculate the total monetized impacts associated with quantified health impacts, EPA applies values derived from a number of sources. For premature mortality, EPA applies a value of a statistical life (VSL) derived from the mortality valuation literature. For certain health impacts, such as a number of respiratory-related ailments, EPA applies willingness-to-pay estimates derived from the valuation literature. For the remaining health impacts, EPA applies values derived from current cost-of-illness and/or wage estimates. Chapter VIII in the DRIA that accompanies this proposal presents the monetary values EPA will apply to changes in the incidence of health and welfare effects associated with reductions in non-GHG pollutants that will occur when these GHG control strategies are finalized.

*Reconsideration of the Existing Stationary Compression Ignition (CI) Engines NESHAP*, Office of Air Quality Planning and Standards, Research Triangle Park, NC, January. EPA–452/R–13–001. Available at <[http://www.epa.gov/ttnecas1/regdata/RIAs/RICE\\_NESHAPReconsideration\\_Compression\\_Ignition\\_Engines\\_RIA\\_final2013\\_EPA.pdf](http://www.epa.gov/ttnecas1/regdata/RIAs/RICE_NESHAPReconsideration_Compression_Ignition_Engines_RIA_final2013_EPA.pdf)>.

<sup>708</sup> U.S. Environmental Protection Agency (U.S. EPA). (2013). *Regulatory Impact Analysis for Reconsideration of Existing Stationary Spark Ignition (SI) RICE NESHAP*, Office of Air Quality Planning and Standards, Research Triangle Park, NC, January. EPA–452/R–13–002. Available at <[http://www.epa.gov/ttnecas1/regdata/RIAs/NESHAP\\_RICE\\_Spark\\_Ignition\\_RIA\\_finalreconsideration2013\\_EPA.pdf](http://www.epa.gov/ttnecas1/regdata/RIAs/NESHAP_RICE_Spark_Ignition_RIA_finalreconsideration2013_EPA.pdf)>.

<sup>709</sup> U.S. Environmental Protection Agency (U.S. EPA). (2015). *Regulatory Impact Analysis for Residential Wood Heaters NSPS Revision*. Office of Air Quality Planning and Standards, Research

Triangle Park, NC, February. EPA–452/R–15–001. Available at <<http://www2.epa.gov/sites/production/files/2015-02/documents/20150204-residential-wood-heaters-ria.pdf>>.

<sup>710</sup> For more information regarding the updated values, see: [http://www.epa.gov/airquality/benmap/models/Source\\_Apportionment\\_BPT\\_TSD\\_1\\_31\\_13.pdf](http://www.epa.gov/airquality/benmap/models/Source_Apportionment_BPT_TSD_1_31_13.pdf) (accessed September 9, 2014).

<sup>711</sup> Fann, N., Baker, K.R., and Fulcher, C.M. (2012). *Characterizing the PM<sub>2.5</sub>-related health benefits of emission reductions for 17 industrial, area and mobile emission sectors across the U.S.*, Environment International, 49, 241–251, published online September 28, 2012.

<sup>712</sup> As we discuss in the emissions chapter of the DRIA (Chapter V), the rule would yield emission reductions from upstream refining and fuel distribution due to decreased petroleum consumption.

<sup>713</sup> The issue is discussed in more detail in the 2012 p.m. NAAQS RIA, Section 5.6.8. See U.S. Environmental Protection Agency. (2012). *Regulatory Impact Analysis for the Final Revisions to the National Ambient Air Quality Standards for Particulate Matter*, Health and Environmental Impacts Division, Office of Air Quality Planning and Standards, EPA–452/R–12–005, December 2012. Available on the internet: <http://www.epa.gov/ttnecas1/regdata/RIAs/finalria.pdf>.

<sup>714</sup> For more information about EPA's population projections, please refer to the following: <http://www.epa.gov/air/benmap/models/BenMAPManualAppendicesAugust2010.pdf> (See Appendix K).

<sup>715</sup> Information on BenMAP, including downloads of the software, can be found at <http://www.epa.gov/air/benmap/>.

## (c) Other Unquantified Health and Environmental Impacts

In addition to the co-pollutant health and environmental impacts EPA will quantify for the analysis of the final standard, there are a number of other health and human welfare endpoints that EPA will not be able to quantify or monetize because of current limitations in the methods or available data. These impacts are associated with emissions of air toxics (including benzene, 1,3-butadiene, formaldehyde, acetaldehyde, acrolein, naphthalene and ethanol), ambient ozone, and ambient PM<sub>2.5</sub> exposures. Chapter VIII of the DRIA lists these unquantified health and environmental impacts.

While there will be impacts associated with air toxic pollutant emission changes that result from the final standard, EPA will not attempt to monetize those impacts. This is primarily because currently available tools and methods to assess air toxics risk from mobile sources at the national scale are not adequate for extrapolation to incidence estimations or benefits assessment. The best suite of tools and methods currently available for assessment at the national scale are those used in the National-Scale Air Toxics Assessment (NATA). EPA's Science Advisory Board specifically commented in their review of the 1996 NATA that these tools were not yet ready for use in a national-scale benefits analysis, because they did not consider the full distribution of exposure and risk, or address sub-chronic health effects.<sup>716</sup> While EPA has since improved the tools, there remain critical limitations for estimating incidence and assessing benefits of reducing mobile source air toxics.<sup>717</sup> EPA continues to work to address these limitations; however, EPA does not anticipate having methods and tools available for national-scale application in time for the analysis of the final rules.<sup>718</sup>

<sup>716</sup> Science Advisory Board. 2001. NATA—Evaluating the National-Scale Air Toxics Assessment for 1996—an SAB Advisory. <http://www.epa.gov/ttn/atw/sab/sabrev.html>.

<sup>717</sup> Examples include gaps in toxicological data, uncertainties in extrapolating results from high-dose animal experiments to estimate human effects at lower doses, limited ambient and personal exposure monitoring data, and insufficient economic research to support valuation of the health impacts often associated with exposure to individual air toxics. See Gwinn et al., 2011. Meeting Report: Estimating the Benefits of Reducing Hazardous Air Pollutants—Summary of 2009 Workshop and Future Considerations. Environ Health Perspect. Jan 2011; 119(1): 125–130.

<sup>718</sup> In April, 2009, EPA hosted a workshop on estimating the benefits of reducing hazardous air pollutants. This workshop built upon the work accomplished in the June 2000 in an earlier (2000) Science Advisory Board/EPA Workshop on the

*I. Energy Security Impacts*

The Phase 2 standards are designed to require improvements in the fuel efficiency of medium- and heavy-duty vehicles and, thereby, reduce fuel consumption and GHG emissions. In turn, the Phase 2 standards help to reduce U.S. petroleum imports. A reduction of U.S. petroleum imports reduces both financial and strategic risks caused by potential sudden disruptions in the supply of imported petroleum to the U.S., thus increasing U.S. energy security. This section summarizes the agency's estimates of U.S. oil import reductions and energy security benefits of the proposed Phase 2 standards. Additional discussion of this issue can be found in Chapter 8 of the draft RIA.

## (1) Implications of Reduced Petroleum Use on U.S. Imports

U.S. energy security is broadly defined as the continued availability of energy sources at an acceptable price. Most discussion of U.S. energy security revolves around the topic of the economic costs of U.S. dependence on oil imports. However, it is not imports alone, but both imports and consumption of petroleum from all sources and their role in economic activity, that expose the U.S. to risk from price shocks in the world oil price. The relative significance of petroleum consumption and import levels for the macroeconomic disturbances that follow from oil price shocks is not fully understood. Recognizing that changing petroleum consumption will change U.S. imports, this assessment of oil costs focuses on those incremental social costs that follow from the resulting changes in imports, employing the usual oil import premium measure. The agencies request comment on how to incorporate the impact of changes in oil consumption, rather than imports exclusively, into our energy security analysis.

While the U.S. has reduced its consumption and increased its production of oil in recent years, it still relies on oil from potentially unstable sources. In addition, oil exporters with a large share of global production have the ability to raise the price of oil by exerting the monopoly power associated

with a cartel, the Organization of Petroleum Exporting Countries (OPEC), to restrict oil supply relative to demand. These factors contribute to the vulnerability of the U.S. economy to episodic oil supply shocks and price spikes. In 2012, U.S. net expenditures for imports of crude oil and petroleum products were \$290 billion and expenditures on both imported oil and domestic petroleum and refined products totaled \$634 billion (see Figure IX–1).<sup>719</sup> Import costs have declined since 2011 but total oil expenditures (domestic and imported) remain near historical highs, at roughly triple the inflation-adjusted levels experienced by the U.S. from 1986 to 2002.

In 2010, just over 40 percent of world oil supply came from OPEC nations and the AEO 2014 (Early Release)<sup>720</sup> projects that this share will rise gradually to over 45 percent by 2040. Approximately 31 percent of global supply is from Middle East and North African countries alone, a share that is also expected to grow. Measured in terms of the share of world oil resources or the share of global oil export supply, rather than oil production, the concentration of global petroleum resources in OPEC nations is even larger. As another measure of concentration, of the 137 countries/principalities that export either crude or refined products, the top 12 have recently accounted for over 55 percent of exports.<sup>721</sup> Eight of these countries are members of OPEC, and a ninth is Russia.<sup>722</sup> In a market where even a 1–2 percent supply loss can raise prices noticeably, and where a 10 percent supply loss could lead to an unprecedented price shock, this regional concentration is of concern.<sup>723</sup>

<sup>719</sup> See EIA Annual Energy Review, various editions. For data 2011–2013, and projected data: EIA Annual Energy Outlook (AEO) 2014 (Reference Case). See Table 11, file “aetotab\_11.xls.”

<sup>720</sup> The agencies used the AEO 2014 (Early Release) since this version of AEO was available at the time that fuel savings from the rule were being estimated. The AEO 2014 (Early Release) and the AEO 2014 have very similar energy market and economic projections. For example, world oil prices are the same between the two forecasts.

<sup>721</sup> Based on data from the CIA, combining various recent years, <https://www.cia.gov/library/publications/the-world-factbook/rankorder/2242rank.html>.

<sup>722</sup> The other three are Norway, Canada, and the EU, an exporter of product.

<sup>723</sup> For example, the 2005 Hurricanes Katrina/Rita and the 2011 Libyan conflict both led to a 1.8 percent reduction in global crude supply. While the price impact of the latter is not easily distinguished given the rapidly rising post-recession prices, the former event was associated with a 10–15 percent world oil price increase. There are a range of smaller events with smaller but noticeable impacts. Somewhat larger events, such as the 2002/3 Venezuelan Strike and the War in Iraq,

Historically, the countries of the Middle East have been the source of eight of the

ten major world oil disruptions,<sup>724</sup> with the ninth originating in Venezuela, an

OPEC country, and the tenth being Hurricanes Katrina and Rita.

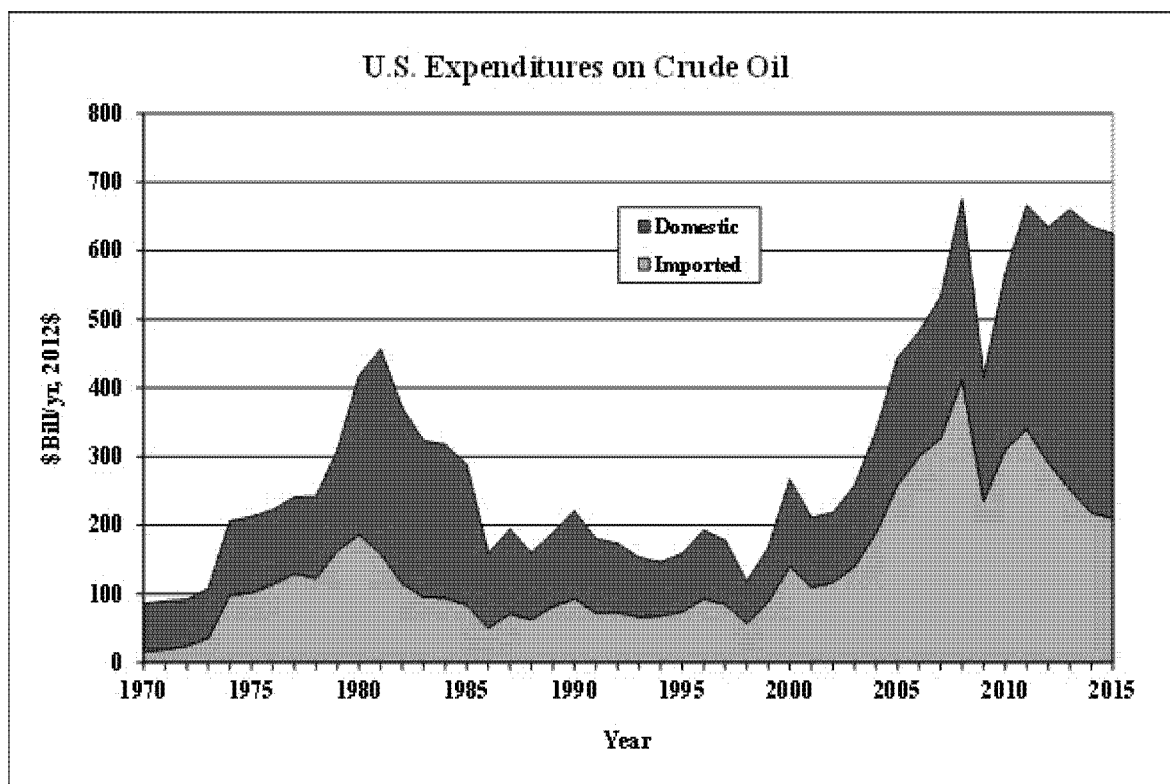


Figure IX-1 U.S. Expenditures on Crude Oil from 1970 through 2015<sup>725</sup>

The agencies used EPA's MOVES model to estimate the reductions in U.S. fuel consumption due to this proposed rule for vocational vehicles and tractors. For HD pickups and vans, the agencies used both DOT's CAFE model and EPA's MOVES model to estimate the fuel consumption impacts. (Detailed explanations of the MOVES and CAFE models can be found in Chapters 5 and 10 of the draft RIA. See IX.C of the preamble for estimates of reduced fuel consumption from the proposed rule). Based on a detailed analysis of

differences in U.S. fuel consumption, petroleum imports, and imports of petroleum products, the agencies estimate that approximately 90 percent of the reduction in fuel consumption resulting from adopting improved GHG emission standards and fuel efficiency standards is likely to be reflected in reduced U.S. imports of crude oil and net imported petroleum products.<sup>726</sup> Thus, on balance, each gallon of fuel saved as a consequence of the HD GHG and fuel efficiency standards is anticipated to reduce total U.S. imports

of petroleum by 0.90 gallons.<sup>727</sup> Based upon the fuel savings estimated by the MOVES/CAFE models and the 90 percent oil import factor, the reduction in U.S. oil imports from these proposed rules are estimated for the years 2020, 2025, 2030, 2040, and 2050 (in millions of barrels per day (MMBD)) in Table IX-25 below. For comparison purposes, Table IX-25 also shows U.S. imports of crude oil in 2020, 2025, 2030 and 2040 as projected by DOE in the Annual Energy Outlook 2014 (Early Release) Reference Case. U.S. Gross Domestic

corresponded to about a 2.9 percent sustained loss of supply, and was associated with a 28 percent world oil price increase.

<sup>724</sup> IEA 2011 "IEA Response System for Oil Supply Emergencies."

<sup>725</sup> For historical data: EIA Annual Energy Review, various editions. For data 2011–2013, and projected data: EIA Annual Energy Outlook (AEO) 2014 (Reference Case). See Table 11, file "aetotab\_11.xls".

<sup>726</sup> We looked at changes in crude oil imports and net petroleum products in the Reference Case in comparison to two cases from the AEO 2014. The two cases are the Low (*i.e.*, Economic Growth) Demand and Low VMT cases. See the spreadsheet "Impacts on Fuel Demands and ImportsJan9.xlsx" comparing the AEO 2014 Reference Case to the Low

Demand Case. See the spreadsheet "Impact of Fuel Demand and Impacts January20VMT.xls" for a comparison of AEO 2014 Reference Case and the Low VMT Case. We also considered a paper entitled "Effect of a U.S. Demand Reduction on Imports and Domestic Supply Levels" by Paul Leiby, 4/16/2013. This paper suggests that "Given a particular reduction in oil demand stemming from a policy or significant technology change, the fraction of oil use savings that shows up as reduced U.S. imports, rather than reduced U.S. supply, is actually quite close to 90 percent, and probably close to 95 percent".

<sup>727</sup> The NHTSA analysis uses a slightly different value that was estimated using unique runs of the National Energy Modeling System (NEMS) that forms the foundation of the Annual Energy Outlook.

NHTSA ran a version of NEMS from 2012 (which would have been used in the 2013 AEO) and computed the change in imports of petroleum products with and without the Phase 1 MDHD program to estimate the relationship between changes in fuel consumption and oil imports. The analysis found that reducing gasoline consumption by 1 gallon reduces imports of refined gasoline by 0.06 gallons and domestic refining from imported crude by 0.94 gallons. Similarly, one gallon of diesel saved by the Phase 1 rule was estimated to reduce imports of refined diesel by 0.26 gallons and domestic refining of imported crude by 0.74 gallons. The agencies will update this analysis for the Final Rule using the model associated with AEO2014, modeling the Phase 2 Preferred Alternative explicitly.

Product (GDP) is projected to grow by roughly 59 percent over the same time frame (e.g., from 2020 to 2040) in the same AEO projections.

TABLE IX–23—PROJECTED U.S. IMPORTS OF CRUDE OIL AND U.S. OIL IMPORT REDUCTIONS RESULTING FROM THE PROPOSED PHASE 2 HEAVY-DUTY VEHICLE RULE IN 2020, 2025, 2030, 2040 AND 2050 USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE

[Millions of barrels per day (MMBD)]<sup>a</sup>

Year	U.S. oil imports	Reductions from proposed HD rule
2020 .....	4.93	0.01
2025 .....	5.04	0.16
2030 .....	5.35	0.37
2040 .....	5.92	0.65
2050 .....	*	0.78

**Notes:**

\* The AEO 2014 (Early Release) only projects energy market and economic trends through 2040.

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

## (2) Energy Security Implications

In order to understand the energy security implications of reducing U.S. oil imports, EPA has worked with Oak Ridge National Laboratory (ORNL), which has developed approaches for evaluating the social costs and energy security implications of oil use. The energy security estimates provided below are based upon a methodology developed in a peer-reviewed study entitled, “*The Energy Security Benefits of Reduced Oil Use, 2006–2015*,” completed in March 2008. This ORNL study is an updated version of the approach used for estimating the energy security benefits of U.S. oil import reductions developed in a 1997 ORNL Report.<sup>728</sup> For EPA and NHTSA rulemakings, the ORNL methodology is updated periodically to account for forecasts of future energy market and economic trends reported in the U.S. Energy Information Administration’s Annual Energy Outlook.

When conducting this analysis, ORNL considered the full cost of importing petroleum into the U.S. The full economic cost is defined to include two components in addition to the purchase price of petroleum itself. These are: (1) The higher costs for oil imports resulting from the effect of U.S. demand on the world oil price (i.e., the “demand” or “monopsony” costs); and

(2) the risk of reductions in U.S. economic output and disruption to the U.S. economy caused by sudden disruptions in the supply of imported oil to the U.S. (i.e., macroeconomic disruption/adjustment costs).

The literature on the energy security for the last two decades has routinely combined the monopsony and the macroeconomic disruption components when calculating the total value of the energy security premium. However, in the context of using a global value for the Social Cost of Carbon (SCC) the question arises: How should the energy security premium be used when some benefits from the rule, such as the benefits of reducing greenhouse gas emissions, are calculated from a global perspective? Monopsony benefits represent avoided payments by U.S. consumers to oil producers that result from a decrease in the world oil price as the U.S. decreases its demand for oil. Although there is clearly an overall benefit to the U.S. when considered from a domestic perspective, the decrease in price due to decreased demand in the U.S. also represents a loss to oil producing countries, one of which is the United States. Given the redistributive nature of this monopsony effect from a global perspective, and the fact that an increasing fraction of it represents a transfer between U.S.

consumers and producers, it is excluded in the energy security benefits calculations for these proposed rules.

In contrast, the other portion of the energy security premium, the avoided U.S. macroeconomic disruption and adjustment cost that arises from reductions in U.S. petroleum imports, does not have offsetting impacts outside of the U.S., and, thus, is included in the energy security benefits estimated for these proposed rules. To summarize, the agencies have included only the avoided macroeconomic disruption portion of the energy security benefits to estimate the monetary value of the total energy security benefits of these proposed rules.

For this rulemaking, ORNL updated the energy security premiums by incorporating the most recent oil price forecast and energy market trends, particularly regional oil supplies and demands, from the AEO 2014 (Early Release) into its model.<sup>729</sup> ORNL developed energy security premium estimates for a number of different years. Table IX–24 provides estimates for energy security premiums for the years 2020, 2025, 2030 and 2040,<sup>730</sup> as well as a breakdown of the components of the energy security premiums for each year. The components of the energy security premiums and their values are discussed below.

<sup>728</sup> Leiby, Paul N., Donald W. Jones, T. Randall Curlee, and Russell Lee, *Oil Imports: An Assessment of Benefits and Costs*, ORNL–6851, Oak Ridge National Laboratory, November, 1997.

<sup>729</sup> Leiby, P., Factors Influencing Estimate of Energy Security Premium for Heavy-Duty Phase 2 Proposed Rule, 11/1/2014, Oak Ridge National Laboratory.

<sup>730</sup> AEO 2014 (Early Release) forecasts energy market trends and values only to 2040. The post-2040 energy security premium values are assumed to be equal to the 2040 estimate.

TABLE IX-24—ENERGY SECURITY PREMIUMS IN 2020, 2025, 2030 AND 2040  
[2012\$/Barrel]\*

Year (range)	Monopsony (range)	Avoided macro- economic disruption/adjustment costs (range)	Total mid-point (range)
2020 .....	\$4.91 (1.63–9.15)	\$6.35 (3.07–10.15)	\$11.25 (6.67–16.53)
2025 .....	\$5.46 (1.81–10.47)	\$7.29 (3.57–11.67)	\$12.75 (7.58–18.65)
2030 .....	\$6.04 (2.00–11.67)	\$8.39 (4.12–13.41)	\$14.43 (8.54–21.13)
2040 .....	\$7.17 (2.32–14.03)	\$10.74 (5.36–17.22)	\$17.91 (–26.14)

**Note:**

\* Top values in each cell are the midpoints, the values in parentheses are the 90 percent confidence intervals.

#### (a) Effect of Oil Use on the Long-Run Oil Price

The first component of the full economic costs of importing petroleum into the U.S. follows from the effect of U.S. import demand on the world oil price over the long-run. Because the U.S. is a sufficiently large purchaser of global oil supplies, its purchases can affect the world oil price. This monopsony power means that increases in U.S. petroleum demand can cause the world price of crude oil to rise, and conversely, that reduced U.S. petroleum demand can reduce the world price of crude oil. Thus, one benefit of decreasing U.S. oil purchases, due to improvements in the fuel efficiency of medium- and heavy-duty vehicles, is the potential decrease in the crude oil price paid for all crude oil purchased.

A variety of oil market and economic factors have contributed to lowering the estimated monopsony premium compared to monopsony premiums cited in recent EPA/NHTSA rulemakings. Three principal factors contribute to lowering the monopsony premium: Lower world oil prices, lower U.S. oil imports and less responsiveness of world oil prices to changes in U.S. oil demand. For example, between 2012 (using the AEO 2012 (Early Release)) and 2014 (using the AEO 2014 (Early Release)), there has been a general downward revision in world oil price projections in the near term (*e.g.* 19 percent in 2020) and a sharp reduction in projected U.S. oil imports in the near term, due to increased U.S. supply (*i.e.*, a 41 percent reduction in U.S. oil imports by 2017 and a 36 percent reduction in 2020). Over the longer term, oil's share of total U.S. imports is projected to gradually increase after 2020 but still remain 27 percent below the AEO2012 (Early Release) projected level in 2035.

Another factor influencing the monopsony premium is that U.S. demand on the global oil market is projected to decline, suggesting diminished overall influence and some reduction in the influence of U.S. oil demand on the world price of oil. Outside of the U.S., projected OPEC supply remains roughly steady as a share of world oil supply compared to the AEO2012 (Early Release). OPEC's share of world oil supply *outside* of the U.S. actually increases slightly. Since OPEC supply is estimated to be more price sensitive than non-OPEC supply, this means that under AEO2014 (Early Release) world oil supply is slightly more responsive to changes in U.S. oil demand. Together, these factors suggest that changes in U.S. oil import reductions have a somewhat smaller effect on the long-run world oil price than changes based on 2012 estimates.

These changes in oil price and import levels lower the monopsony portion of energy security premium since this portion of the security premium is related to the change in total U.S. oil import costs that is achieved by a marginal reduction in U.S. oil imports. Since both the price and the quantity of oil imports are lower, the monopsony premium component is 46–57 percent lower over the years 2017–2025 than the estimates based upon the AEO 2012 (Early Release) projections.

There is disagreement in the literature about the magnitude of the monopsony component, and its relevance for policy analysis. Brown and Huntington (2013),<sup>731</sup> for example, argue that the United States' refusal to exercise its market power to reduce the world oil price does not represent a proper externality, and that the monopsony

component should not be considered in calculations of the energy security externality. However, they also note in their earlier discussion paper (Brown and Huntington 2010)<sup>732</sup> that this is a departure from the traditional energy security literature, which includes sustained wealth transfers associated with stable but higher-price oil markets. On the other hand, Greene (2010)<sup>733</sup> and others in prior literature (*e.g.*, Toman 1993)<sup>734</sup> have emphasized that the monopsony cost component is policy-relevant because the world oil market is non-competitive and strongly influenced by cartelized and government-controlled supply decisions. Thus, while sometimes couched as an externality, Greene notes that the monopsony component is best viewed as stemming from a completely different market failure than an externality (Ledyard 2008),<sup>735</sup> yet still implying marginal social costs to importers.

There is also a question about the ability of gradual, long-term reductions, such as those resulting from this proposed rule, to reduce the world oil price in the presence of OPEC's monopoly power. OPEC is currently the world's marginal petroleum supplier, and could conceivably respond to gradual reductions in U.S. demand with gradual reductions in supply over the course of several years as the fuel

<sup>732</sup> Reassessing the Oil Security Premium. RFF Discussion Paper Series, (RFF DP 10–05). doi: RFF DP 10–05

<sup>733</sup> Greene, D.L. 2010. Measuring energy security: Can the United States achieve oil independence? *Energy Policy*, 38(4), 1614–1621. doi:10.1016/j.enpol.2009.01.041.

<sup>734</sup> Reassessing the Oil Security Premium. RFF Discussion Paper Series, (RFF DP 10–05). doi:RFF DP 10–05.

<sup>735</sup> Ledyard, John O. "Market Failure." *The New Palgrave Dictionary of Economics*. Second Edition. Eds. Steven N. Durlauf and Lawrence E. Blume. Palgrave Macmillan, 2008.

<sup>731</sup> Brown, Stephen P.A. and Hillard G. Huntington. 2013. Assessing the U.S. Oil Security Premium. *Energy Economics*, vol. 38, pp 118–127.

savings resulting from this rule grow. However, if OPEC opts for a long-term strategy to preserve its market share, rather than maintain a particular price level (as they have done recently in response to increasing U.S. petroleum production), reduced demand would create downward pressure on the global price. The Oak Ridge analysis assumes that OPEC does respond to demand reductions over the long run, but there is still a price effect in the model. Under the mid-case behavioral assumption used in the premium calculations, OPEC responds by gradually reducing supply to maintain *market share* (consistent with the long-term self-interested strategy suggested by Gately (2004, 2007)).<sup>736</sup>

It is important to note that the decrease in global petroleum prices resulting from this rulemaking could spur increased consumption of petroleum in other sectors and countries, leading to a modest uptick in GHG emissions outside of the United States. This increase in global fuel consumption could offset some portion of the GHG reduction benefits associated with these proposed rules. The agencies have not quantified this increase in global GHG emissions. We request comments, data sources and methodologies for how global rebound effects may be quantified.

#### (b) Macroeconomic Disruption Adjustment Costs

The second component of the oil import premium, “avoided macroeconomic disruption/adjustment costs”, arises from the effect of oil imports on the expected cost of supply disruptions and accompanying price increases. A sudden increase in oil prices triggered by a disruption in world oil supplies has two main effects: (1) It increases the costs of oil imports in the short-run and (2) it can lead to macroeconomic contraction, dislocation and Gross Domestic Product (GDP) losses. For example, ORNL estimates the combined value of these two factors to be \$6.34/barrel when U.S. oil imports are reduced in 2020, with a range from \$3.07/barrel to \$10.15/barrel of imported oil reduced.

Since future disruptions in foreign oil supplies are an uncertain prospect, each of the disruption cost components must be weighted by the probability that the supply of petroleum to the U.S. will actually be disrupted. Thus, the “expected value” of these costs—the

product of the probability that a supply disruption will occur and the sum of costs from reduced economic output and the economy’s abrupt adjustment to sharply higher petroleum prices—is the relevant measure of their magnitude. Further, when assessing the energy security value of a policy to reduce oil use, it is only the change in the expected costs of disruption that results from the policy that is relevant. The expected costs of disruption may change from lowering the normal (*i.e.*, pre-disruption) level of domestic petroleum use and imports, from any induced alteration in the likelihood or size of disruption, or from altering the short-run flexibility (*e.g.*, elasticity) of petroleum use.

With updated oil market and economic factors, the avoided macroeconomic disruption component of the energy security premiums is slightly lower in comparison to avoided macroeconomic disruption premiums used in previous rulemakings. Factors that contribute to moderately lowering the avoided macroeconomic disruption component are lower projected GDP, moderately lower oil prices and slightly smaller price increases during prospective shocks. For example, oil price levels are 5–19 percent lower over the 2020–2035 period, and the likely increase in oil prices in the event of an oil shock are somewhat smaller, given small increases in the responsiveness of oil supply to changes in the world price of oil. Overall, the avoided macroeconomic disruption component estimates for the oil security premiums are 2–19 percent lower over the period from 2020–2035 based upon different projected oil market and economic trends in the AEO2014 (Early Release) compared to the AEO2012 (Early Release).

There are several reasons why the avoided macroeconomic disruption premiums change only moderately. One reason is that the macroeconomic sensitivity to oil price shocks is assumed unchanged in recent years since U.S. oil consumption levels and the value share of oil in the U.S. economy remain at high levels. For example, Figure IX–2 below shows that under AEO2014 (Early Release), projected U.S. real annual oil expenditures continue to rise after 2015 to over \$800 billion (2012\$) by 2030. The value share of oil use in the U.S. economy remains between three and four percent, well above the levels observed from 1985 to 2005. A second factor is that oil disruption risks are little changed. The two factors influencing disruption risks are the probability of global supply

interruptions and the world oil supply share from OPEC. Both factors are not significantly different from previous forecasts of oil market trends.

The energy security costs estimated here follow the oil security premium framework, which is well established in the energy economics literature. The oil import premium gained attention as a guiding concept for energy policy around the time of the second and third major post-war oil shocks (Bohi and Montgomery 1982, EMF 1982).<sup>737</sup> Plummer (1982)<sup>738</sup> provided valuable discussion of many of the key issues related to the oil import premium as well as the analogous oil stockpiling premium. Bohi and Montgomery (1982)<sup>739</sup> detailed the theoretical foundations of the oil import premium established many of the critical analytic relationships through their thoughtful analysis. Hogan (1981)<sup>740</sup> and Broadman and Hogan (1986, 1988)<sup>741</sup> revised and extended the established analytical framework to estimate optimal oil import premia with a more detailed accounting of macroeconomic effects.

Since the original work on energy security was undertaken in the 1980’s, there have been several reviews on this topic. For example, Leiby, Jones, Curlee and Lee (1997)<sup>742</sup> provided an extended review of the literature and issues regarding the estimation of the premium. Parry and Darmstadter (2004)<sup>743</sup> also provided an overview of extant oil security premium estimates

<sup>737</sup>Bohi, Douglas R. And W. David Montgomery 1982. Social Cost of Imported and Import Policy, Annual Review of Energy, 7:37–60. Energy Modeling Forum, 1981. World Oil, EMF Report 6 (Stanford University Press: Stanford 39 CA. <https://emf.stanford.edu/publications/emf-6-world-oil>).

<sup>738</sup>Plummer, James L. (Ed.) 1982. Energy Vulnerability, “Basic Concepts, Assumptions and Numerical Results”, pp. 13–36, (Cambridge MA: Ballinger Publishing Co.)

<sup>739</sup>Bohi, Douglas R. And W. David Montgomery 1982. Social Cost of Imported and U.S. Import Policy, Annual Review of Energy, 7:37–60.

<sup>740</sup>Hogan, William W., 1981. “Import Management and Oil Emergencies”, Chapter 9 in Deese, 5 David and Joseph Nye, eds. Energy and Security. Cambridge, MA: Ballinger Publishing Co.

<sup>741</sup>Broadman, H.G. 1986. “The Social Cost of Imported Oil,” Energy Policy 14(3):242–252. Broadman H.G. and W.W. Hogan, 1988. “Is an Oil Import Tariff Justified? An American Debate: The Numbers Say ‘Yes’,” The Energy Journal 9: 7–29.

<sup>742</sup>Leiby, Paul N., Donald W. Jones, T. Randall Curlee, and Russell Lee, Oil Imports: An Assessment of Benefits and Costs, ORNL–6851, Oak Ridge National Laboratory, November 1, 1997.

<sup>743</sup>Parry, Ian W.H. and Joel Darmstadter 2004. “The Costs of U.S. Oil Dependency,” Resources for the Future, November 17, 2004 (also published as NCEP Technical Appendix Chapter 1: Enhancing Oil Security, the National Commission on Energy Policy 2004 Ending the Energy Stalemate—A Bipartisan Strategy to Meet America’s Energy Challenges.)

<sup>736</sup>Gately, Dermot 2004. “OPEC’s Incentives for Faster Output Growth”, The Energy Journal, 25 (2):75–96; Gately, Dermot 2007. “What Oil Export Levels Should We Expect From OPEC?”, The Energy Journal, 28(2):151–173.

and estimated of some premium components.

The recent economics literature on whether oil shocks are a threat to economic stability that they once were is mixed. Some of the current literature asserts that the macroeconomic component of the energy security externality is small. For example, the National Research Council (2009) argued that the non-environmental externalities associated with dependence on foreign oil are small, and potentially trivial.<sup>744</sup> Analyses by Nordhaus (2007) and Blanchard and Gali (2010) question the impact of more recent oil price shocks on the economy.<sup>745</sup> They were motivated by attempts to explain why the economy actually expanded immediately after the last shocks, and why there was no evidence of higher energy prices being passed on through higher wage inflation. Using different methodologies, they conclude that the economy has largely gotten over its concern with dramatic swings in oil prices.

One reason, according to Nordhaus, is that monetary policy has become more accommodating to the price impacts of oil shocks. Another is that consumers have simply decided that such movements are temporary, and have noted that price impacts are not passed on as inflation in other parts of the economy. He also notes that real changes to productivity due to oil price increases are incredibly modest,<sup>746</sup> and that the general direction of the economy matters a great deal regarding how the economy responds to a shock. Estimates of the impact of a price shock on aggregate demand are insignificantly different from zero.

Blanchard and Gali (2010) contend that improvements in monetary policy (as noted above), more flexible labor markets, and lessening of energy

intensity in the economy, combined with an absence of concurrent shocks, all contributed to lessen the impact of oil shocks after 1980. They find “. . . the effects of oil price shocks have changed over time, with steadily smaller effects on prices and wages, as well as on output and employment.”<sup>747</sup> In a comment at the chapter's end, this work is summarized as follows: “The message of this chapter is thus optimistic in that it suggests a transformation in U.S. institutions has inoculated the economy against the responses that we saw in the past.”

At the same time, the implications of the “Shale Oil Revolution” are now being felt in the international markets, with current prices at four year lows. Analysts generally attribute this result in part to the significant increase in supply resulting from U.S. production, which has put liquid petroleum production on par with Saudi Arabia. The price decline is also attributed to the sustained reductions in U.S. consumption and global demand growth from fuel efficiency policies and high oil prices. The resulting decrease in foreign imports, down to about one-third of domestic consumption (from 60 percent in 2005, for example<sup>748</sup>), effectively permits U.S. supply to act as a buffer against artificial or other supply restrictions (the latter due to conflict or natural disaster, for example).

However, other papers suggest that oil shocks, particularly sudden supply shocks, remain a concern. Both Blanchard and Gali's and Nordhaus work were based on data and analysis through 2006, ending with a period of strong global economic growth and growing global oil demand. The Nordhaus work particularly stressed the effects of the price increase from 2002–2006 that were comparatively gradual (about half the growth rate of the 1973 event and one-third that of the 1990 event). The Nordhaus study emphasizes the robustness of the U.S. economy during a time period through 2006. This time period was just before rapid further increases in the price of oil and other commodities with oil prices more-than-doubling to over \$130/barrel by mid-2008, only to drop after the onset of the largest recession since the Great Depression.

Hamilton (2012) reviewed the empirical literature on oil shocks and suggested that the results are mixed, noting that some work (e.g. Rasmussen and Roitman (2011) finds less evidence

for economic effects of oil shocks, or declining effects of shocks (Blanchard and Gali 2010), while other work continues to find evidence regarding the economic importance of oil shocks. For example, Baumeister and Peersman (2011) found that an oil price increase of a given size seems to have a decreasing effect over time, but noted that the declining price-elasticity of demand meant that a given physical disruption had a bigger effect on price and turned out to have a similar effect on output as in the earlier data.”<sup>749</sup> Hamilton observes that “a negative effect of oil prices on real output has also been reported for a number of other countries, particularly when nonlinear functional forms have been employed” (citing as recent examples Kim 2012, Engemann, Kliesen, and Owyang 2011 and Daniel, et. al. 2011). Alternatively, rather than a declining effect, Ramey and Vine (2010) found “remarkable stability in the response of aggregate real variables to oil shocks once we account for the extra costs imposed on the economy in the 1970s by price controls and a complex system of entitlements that led to some rationing and shortages.”<sup>750</sup>

Some of the recent literature on oil price shocks has emphasized that economic impacts depend on the nature of the oil shock, with differences between price increases caused by sudden supply loss and those caused by rapidly growing demand. Most recent analyses of oil price shocks have confirmed that “demand-driven” oil price shocks have greater effects on oil prices and tend to have positive effects on the economy while “supply-driven” oil shocks still have negative economic impacts (Baumeister, Peersman and Robays, 2010). A recent paper by Kilian and Vigfusson (2014), for example, assigned a more prominent role to the effects of price increases that are unusual, in the sense of being beyond range of recent experience. Kilian and Vigfussen also conclude that the difference in response to oil shocks may well stem from the different effects of demand- and supply-based price increases: “One explanation is that oil price shocks are associated with a range of oil demand and oil supply shocks, some of which stimulate the U.S.

<sup>744</sup> National Research Council, 2009. Hidden Costs of Energy: Unpriced Consequences of Energy Production and Use. National Academy of Science, Washington, DC.

<sup>745</sup> See, William Nordhaus, “Who's Afraid of a Big Bad Oil Shock?,” available at [http://aida.econ.yale.edu/~nordhaus/homepage/Big\\_Bad\\_Oil\\_Shock\\_Meeting.pdf](http://aida.econ.yale.edu/~nordhaus/homepage/Big_Bad_Oil_Shock_Meeting.pdf), and Olivier Blanchard and Jordi Gali, “The macroeconomic Effects of Oil price Shocks: Why are the 2000s so different from the 1970s?,” pp. 373–421, in *The International Dimensions of Monetary Policy*, Jordi Gali and Mark Gertler, editors, University of Chicago Press, February 2010, available at <http://www.nber.org/chapters/c0517.pdf>.

<sup>746</sup> In fact, “. . . energy-price changes have no effect on multifactor productivity and very little effect on labor productivity.” Page 19. He calculates the productivity effect of a doubling of oil prices as a decrease of 0.11 percent for one year and 0.04 percent a year for ten years. Page 5. (The doubling reflects the historical experience of the post-war shocks, as described in Table 7.1 in Blanchard and Gali, p. 380.)

<sup>747</sup> Blanchard and Gali, p. 414.

<sup>748</sup> See, Oil Price Drops on Oversupply, <http://www.oil-price.net/en/articles/oil-price-drops-on-oversupply.php>, 10/6/2014.

<sup>749</sup> Hamilton, J.D. (2012). Oil Prices, Exhaustible Resources, and Economic Growth. In *Handbook of Energy and Climate Change*. Retrieved from [http://econweb.ucsd.edu/~jhamilton/handbook\\_climate.pdf](http://econweb.ucsd.edu/~jhamilton/handbook_climate.pdf).

<sup>750</sup> Ramey, V.A., & Vine, D.J. (2010). “Oil, Automobiles, and the U.S. Economy: How Much have Things Really Changed?,” National Bureau of Economic Research Working Papers, WP 16067 (June). Retrieved from <http://www.nber.org/papers/w16067.pdf>.

economy in the short run and some of which slow down U.S. growth (see Kilian 2009a). How recessionary the response to an oil price shock is thus depends on the average composition of oil demand and oil supply shocks over the sample period.”

The general conclusion that oil supply-driven shocks reduce economic output is also reached in a recently published paper by Cashin et al. (2014) for 38 countries from 1979–2011. “The results indicate that the economic consequences of a supply-driven oil-price shock are very different from those

of an oil-demand shock driven by global economic activity, and vary for oil-importing countries compared to energy exporters,” and “oil importers [including the U.S.] typically face a long-lived fall in economic activity in response to a supply-driven surge in oil prices” but almost all countries see an increase in real output for an oil-demand disturbance. Note that the energy security premium calculation in this analysis is based on price shocks from potential future supply events only.

Finally, despite continuing uncertainty about oil market behavior and outcomes and the sensitivity of the U.S. economy to oil shocks, it is generally agreed that it is beneficial to reduce petroleum fuel consumption from an energy security standpoint. Reducing fuel consumption reduces the amount of domestic economic activity associated with a commodity whose price depends on volatile international markets. Also, reducing U.S. oil import levels reduces the likelihood and significance of supply disruptions.

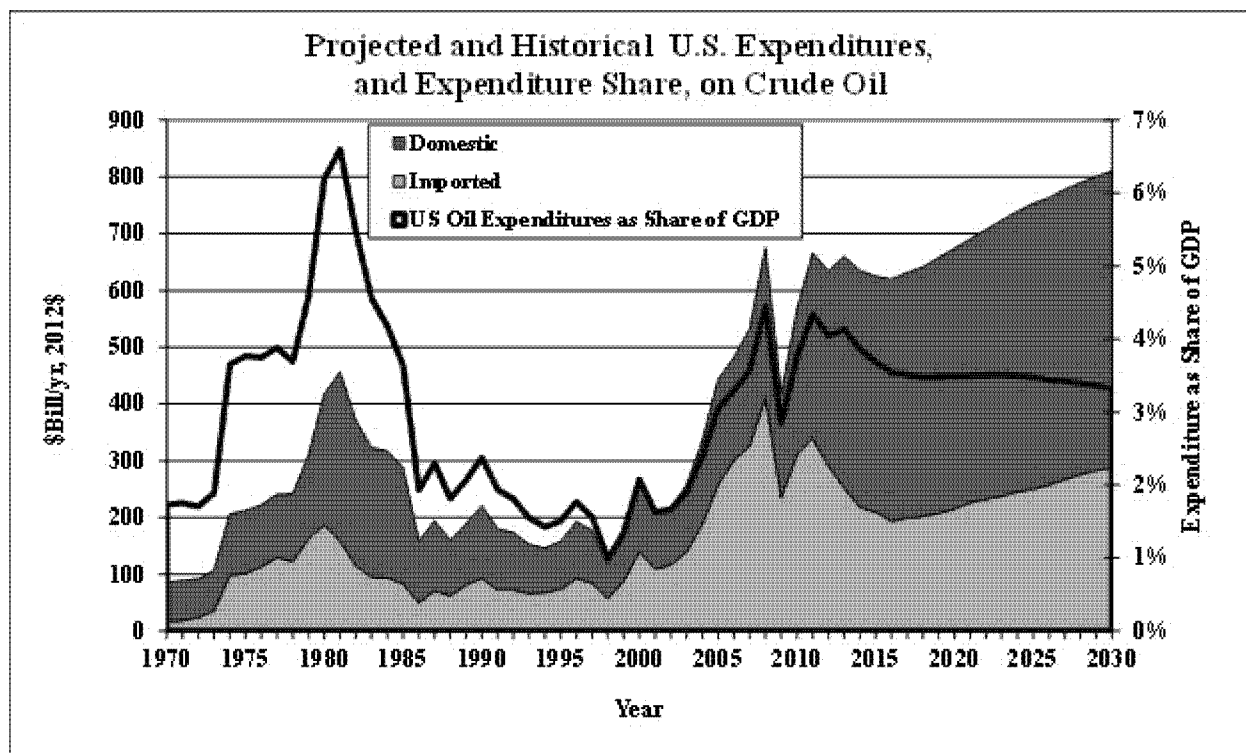


Figure IX-2 Projected and Historical U.S. Expenditures, and Expenditure Share, on Crude Oil<sup>751</sup>

#### (c) Cost of Existing U.S. Energy Security Policies

The last often-identified component of the full economic costs of U.S. oil imports are the costs to the U.S. taxpayers of existing U.S. energy security policies. The two primary examples are maintaining the Strategic Petroleum Reserve (SPR) and maintaining a military presence to help secure a stable oil supply from potentially vulnerable regions of the world. The SPR is the largest stockpile of government-owned emergency crude oil in the world. Established in the

aftermath of the 1973/1974 oil embargo, the SPR provides the U.S. with a response option should a disruption in commercial oil supplies threaten the U.S. economy. It also allows the U.S. to meet part of its International Energy Agency obligation to maintain emergency oil stocks, and it provides a national defense fuel reserve. While the costs for building and maintaining the SPR are more clearly related to U.S. oil use and imports, historically these costs have not varied in response to changes in U.S. oil import levels. Thus, while the effect of the SPR in moderating price shocks is factored into the ORNL

analysis, the cost of maintaining the SPR is excluded.

U.S. military costs are excluded from the analysis performed by ORNL because their attribution to particular missions or activities is difficult, and because it is not clear that these outlays would decline in response to incremental reductions in U.S. oil imports. Most military forces serve a broad range of security and foreign policy objectives. The agencies also recognize that attempts to attribute some share of U.S. military costs to oil imports are further challenged by the need to estimate how those costs might

<sup>751</sup> Historical data are from EIA Annual Energy Review, various editions. For data since 2011 and

projected data: Source is EIA Annual Energy Outlook (AEO) 2014 (Reference Case). See Table 11,

file “aetab\_11.xlsx” and Table 20 (Macroeconomic Indicators,” (file “aetab\_20.xlsx”).



vary with incremental variations in U.S. oil imports.

### (3) Energy Security Benefits of This Program

Using the ORNL “oil premium” methodology, updating world oil price values and energy trends using AEO 2014 (Early Release) and using the estimated fuel savings from the proposed rules estimated from the MOVES/CAFE models, the agencies has calculated the annual energy security benefits of this proposed rule through 2050.<sup>752</sup> Since the agencies are taking a global perspective with respect to valuing greenhouse gas benefits from the rules, only the avoided macroeconomic adjustment/disruption portion of the energy security premium is used in the energy security benefits estimates present below. These results are shown below in Table IX–25. The agencies have also calculated the net present value at 3 percent and 7 percent discount rates of model year lifetime benefits associated with energy security; these values are presented in Table IX–26.

**TABLE IX–25—ANNUAL U.S. ENERGY SECURITY BENEFITS OF THE PREFERRED ALTERNATIVE AND NET PRESENT VALUES AT 3% AND 7% DISCOUNT RATES USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**

[In millions of 2012\$]<sup>a</sup>

Year	Benefits (2012\$)
2018 .....	10
2019 .....	20
2020 .....	31
2021 .....	77
2022 .....	140
2023 .....	211
2024 .....	328
2025 .....	456
2026 .....	596
2027 .....	770
2028 .....	947
2029 .....	1,126
2030 .....	1,306
2035 .....	2,156
2040 .....	2,920
2050 .....	3,498
NPV, 3% .....	28,947
NPV, 7% .....	11,857

#### Note:

<sup>752</sup> In order to determine the energy security benefits beyond 2040, we use the 2040 energy security premium multiplied by the estimate fuel savings from the proposed rule. Since the AEO 2014 (Early Release) only goes to 2040, we only calculate energy security premiums to 2040.

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

**TABLE IX–26—DISCOUNTED MODEL YEAR LIFETIME ENERGY SECURITY BENEFITS DUE TO THE PREFERRED ALTERNATIVE AT 3% AND 7% DISCOUNT RATES USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**

[Millions of 2012\$]<sup>a</sup>

Calendar year	3% discount rate	7% discount rate
2018 .....	86	60
2019 .....	85	56
2020 .....	84	53
2021 .....	534	326
2022 .....	579	341
2023 .....	621	353
2024 .....	996	546
2025 .....	1,060	560
2026 .....	1,121	571
2027 .....	1,375	676
2028 .....	1,388	657
2029 .....	1,397	637
Sum .....	9,325	4,837

#### Note:

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

#### J. Other Impacts

##### (1) Costs of Noise, Congestion and Accidents Associated With Additional (Rebound) Driving

Although it provides benefits to drivers as described above, increased vehicle use associated with the rebound effect also contributes to increased traffic congestion, motor vehicle accidents, and highway noise. Depending on how the additional travel is distributed over the day and where it takes place, additional vehicle use can contribute to traffic congestion and delays by increasing the number of vehicles using facilities that are already heavily traveled. These added delays impose higher costs on drivers and other vehicle occupants in the form of increased travel time and operating expenses. At the same time, this additional travel also increases costs associated with traffic accidents and vehicle noise.

The agencies estimate these costs using the same methodology as used in the two light-duty and the HD Phase 1 rule analyses, which relies on estimates of congestion, accident, and noise costs imposed by automobiles and light trucks developed by the Federal

Highway Administration to estimate these increased external costs caused by added driving.<sup>753</sup> We provide the details behind the estimates in Chapter 8.7 of the draft RIA. The agencies request comment on all input metrics used in the analysis of accidents, congestion and noise and on the calculation methodology. Table IX–27 presents the estimated annual impacts associated with accidents, congestion and noise along with net present values at both 3 percent and 7 percent discount rates. Table IX–28 presents the estimated discounted model year lifetime impacts associated with accidents, congestion and noise.

**TABLE IX–27—ANNUAL COSTS ASSOCIATED WITH ACCIDENTS, CONGESTION AND NOISE AND NET PRESENT VALUES AT 3% AND 7% DISCOUNT RATES USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**

[Millions of 2012\$]<sup>a</sup>

Calendar year	Costs of accidents, congestion, and noise
2018 .....	\$0
2019 .....	0
2020 .....	0
2021 .....	117
2022 .....	172
2023 .....	226
2024 .....	279
2025 .....	330
2026 .....	379
2027 .....	425
2028 .....	467
2029 .....	506
2030 .....	542
2035 .....	676
2040 .....	758
2050 .....	871
NPV, 3% .....	9,334
NPV, 7% .....	4,202

#### Note:

<sup>a</sup> For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>753</sup> These estimates were developed by FHWA for use in its 1997 Federal Highway Cost Allocation Study; <http://www.fhwa.dot.gov/policy/hcas/final/index.htm> (last accessed July 8, 2012).

**TABLE IX-28—DISCOUNTED MODEL YEAR LIFETIME COSTS OF ACCIDENTS, CONGESTION AND NOISE AT 3% AND 7% DISCOUNT RATES USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**

[Millions of 2012\$]<sup>a</sup>

Calendar year	3% discount rate	7% discount rate
2018 .....	132	85
2019 .....	146	94
2020 .....	162	103
2021 .....	450	284
2022 .....	438	266
2023 .....	427	250
2024 .....	424	239
2025 .....	422	229
2026 .....	420	219
2027 .....	415	209
2028 .....	409	198
2029 .....	402	187
Sum .....	4,247	2,362

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

**(2) Benefits Associated With Reduced Refueling Time**

By reducing the frequency with which drivers typically refuel their vehicles and by extending the upper limit of the range that can be traveled before requiring refueling (*i.e.*, future fuel tank sizes remain constant), savings would be realized associated with less time spent refueling vehicles. Alternatively, refill intervals may remain the same (*i.e.*, future fuel tank sizes get smaller), resulting in the same number of refills as today but less time spent per refill because there would be less fuel to refill. The agencies have estimated this impact using the former approach—by assuming that future tank sizes remain constant.

The savings in refueling time are calculated as the total amount of time the driver of a typical truck in each class would save each year as a consequence of pumping less fuel into the vehicle's tank. The calculation does not include any reduction in time spent searching for a fueling station or other time spent at the station; it is assumed that time savings occur only when truck operators are actually refueling their vehicles.

The calculation uses the reduced number of gallons consumed by truck type and divides that value by the tank volume and refill amount to get the number of refills, then multiplies that by the time per refill to determine the number of hours saved in a given year. The calculation then applies DOT-

recommended values of travel time savings to convert the resulting time savings to their economic value, including a 1.2 percent growth rate in those time savings going forward.<sup>754</sup> The input metrics used in the analysis are presented in greater detail in draft RIA Chapter 9.7. The annual benefits associated with reduced refueling time are shown in Table IX-29 along with net present values at both 3 percent and 7 percent discount rates. The discounted model year lifetime benefits are shown in Table IX-30.

**TABLE IX-29—ANNUAL REFUELING BENEFITS AND NET PRESENT VALUES AT 3% AND 7% DISCOUNT RATES USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**

[Millions of 2012\$]<sup>a</sup>

Calendar year	Refueling benefits
2018 .....	3
2019 .....	6
2020 .....	9
2021 .....	25
2022 .....	47
2023 .....	72
2024 .....	113
2025 .....	157
2026 .....	205
2027 .....	266
2028 .....	327
2029 .....	386
2030 .....	444
2035 .....	698
2040 .....	890
2050 .....	1,195
NPV, 3% .....	9,410
NPV, 7% .....	3,868

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

**TABLE IX-30—DISCOUNTED MODEL YEAR LIFETIME REFUELING BENEFITS USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**

[Millions of 2012\$]<sup>a</sup>

Model year	3% discount rate	7% discount rate
2018 .....	23	16
2019 .....	22	15
2020 .....	21	14
2021 .....	163	101
2022 .....	184	110
2023 .....	203	117
2024 .....	325	181
2025 .....	349	187

<sup>754</sup> U.S. Department of Transportation, Valuation of Travel Guidance, July 9, 2014, at page 14.

**TABLE IX-30—DISCOUNTED MODEL YEAR LIFETIME REFUELING BENEFITS USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE—Continued**

[Millions of 2012\$]<sup>a</sup>

Model year	3% discount rate	7% discount rate
2026 .....	372	191
2027 .....	466	231
2028 .....	465	222
2029 .....	463	213
Sum .....	3,055	1,597

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

**(3) Benefits of Increased Travel Associated With Rebound Driving**

The increase in travel associated with the rebound effect produces additional benefits to vehicle owners and operators, which reflect the value of the added (or more desirable) social and economic opportunities that become accessible with additional travel. The analysis estimates the economic benefits from increased rebound-effect driving as the sum of fuel expenditures incurred plus the consumer surplus from the additional accessibility it provides. As evidenced by the fact that vehicles make more frequent or longer trips when the cost of driving declines, the benefits from this added travel exceed added expenditures for the fuel consumed. The amount by which the benefits from this increased driving exceed its increased fuel costs measures the net benefits from the additional travel, usually referred to as increased consumer surplus.

The agencies' analysis estimates the economic value of the increased consumer surplus provided by added driving using the conventional approximation, which is one half of the product of the decline in vehicle operating costs per vehicle-mile and the resulting increase in the annual number of miles driven. Because it depends on the extent of improvement in fuel economy, the value of benefits from increased vehicle use changes by model year and varies among alternative standards. Under even those alternatives that would impose the highest standards, however, the magnitude of the consumer surplus from additional vehicle use represents a small fraction of this benefit.

The annual benefits associated with increased travel are shown in Table IX-31 along with net present values at both

3 percent and 7 percent discount rates. The discounted model year lifetime benefits are shown in Table IX-32.

**TABLE IX-31—ANNUAL VALUE OF INCREASED TRAVEL AND NET PRESENT VALUES AT 3% AND 7% DISCOUNT RATES USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**

[Millions of 2012\$]<sup>a</sup>

Calendar year	Benefits of increased travel
2018 .....	0
2019 .....	0
2020 .....	0
2021 .....	445
2022 .....	636

**TABLE IX-31—ANNUAL VALUE OF INCREASED TRAVEL AND NET PRESENT VALUES AT 3% AND 7% DISCOUNT RATES USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE—Continued**

[Millions of 2012\$]<sup>a</sup>

Calendar year	Benefits of increased travel
2023 .....	821
2024 .....	1,001
2025 .....	1,179
2026 .....	1,346
2027 .....	1,506
2028 .....	1,647
2029 .....	1,783
2030 .....	1,909
2035 .....	2,445
2040 .....	2,873

**TABLE IX-31—ANNUAL VALUE OF INCREASED TRAVEL AND NET PRESENT VALUES AT 3% AND 7% DISCOUNT RATES USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE—Continued**

[Millions of 2012\$]<sup>a</sup>

Calendar year	Benefits of increased travel
2050 .....	3,286
NPV, 3% .....	34,240
NPV, 7% .....	15,316

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

**TABLE IX-32—DISCOUNTED MODEL YEAR LIFETIME VALUE OF INCREASED TRAVEL AT 3% AND 7% DISCOUNT RATES USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**

[Millions of 2012\$]<sup>a</sup>

Calendar year	3% discount rate	7% discount rate
2018 .....	\$554	\$353
2019 .....	618	390
2020 .....	686	429
2021 .....	1,510	942
2022 .....	1,488	894
2023 .....	1,463	847
2024 .....	1,434	799
2025 .....	1,442	774
2026 .....	1,447	748
2027 .....	1,421	708
2028 .....	1,415	678
2029 .....	1,406	649
Sum .....	14,884	8,211

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

**K. Summary of Benefits and Costs**

This section presents the costs, benefits, and other economic impacts of the proposed Phase 2 standards. It is important to note that NHTSA's proposed fuel consumption standards and EPA's proposed GHG standards would both be in effect, and would jointly lead to increased fuel efficiency and reductions in GHG and non-GHG emissions. The individual categories of benefits and costs presented in the tables below are defined more fully and presented in more detail in Chapter 8 of the draft RIA. These include:

- The vehicle program costs (costs of complying with the vehicle CO<sub>2</sub> and fuel consumption standards),
- changes in fuel expenditures associated with reduced fuel use by more efficient vehicles and increased

fuel use associated with the “rebound” effect, both of which result from the program,

- the global economic value of reductions in GHGs,
- the economic value of reductions in non-GHG pollutants,
- costs associated with increases in noise, congestion, and accidents resulting from increased vehicle use,
- savings in drivers' time from less frequent refueling,
- benefits of increased vehicle use associated with the “rebound” effect, and
- the economic value of improvements in U.S. energy security impacts.

For a discussion of the cost of ownership and the agencies' payback

analysis of vehicles covered by this proposal, please see Section IX.M.

The agencies conducted coordinated and complementary analyses using two analytical methods referred to as Method A and Method B. For an explanation of these methods, please see Section I.D. And as discussed in Section X.A.1, the agencies present estimates of benefits and costs that are measured against two different assumptions about improvements in fuel efficiency that might occur in the absence of the Phase 2 standards. The first case (Alternative 1a) uses a baseline that projects very little improvement in new vehicles in the absence of new Phase 2 standards, and the second (Alternative 1b) uses a more dynamic baseline that projects more significant improvements in vehicle fuel efficiency.

Table IX-33 shows benefits and costs for the proposed standards from the perspective of a program designed to improve the nation's energy security and conserve energy by improving fuel efficiency. From this viewpoint,

technology costs occur when the vehicle is purchased. Fuel savings are counted as benefits that occur over the lifetimes of the vehicles produced during the model years subject to the Phase 2 standards as they consume less fuel.

The table shows that benefits far outweigh the costs, and the preferred alternative is anticipated to result in large net benefits to the U.S. economy.

**TABLE IX-33—LIFETIME BENEFITS & COSTS OF THE PREFERRED ALTERNATIVE FOR MODEL YEARS 2018–2029 VEHICLES USING ANALYSIS METHOD A**

[Billions of 2012\$ discounted at 3% and 7%]

Category	Baseline 1a		Baseline 1b	
	3%	7%	3%	7%
Vehicle Program: Technology and Indirect Costs, Normal Profit on Additional Investments .....	25.4	17.1	25.0	16.8
Additional Routine Maintenance .....	1.1	0.6	1.0	0.6
Congestion, Accidents, and Noise from Increased Vehicle Use .....	4.7	2.8	4.5	2.6
<b>Total Costs</b> .....	<b>31.1</b>	<b>20.5</b>	<b>30.5</b>	<b>20.0</b>
Fuel Savings (valued at pre-tax prices) .....	175.1	94.2	165.1	89.2
Savings from Less Frequent Refueling .....	3.1	1.6	2.9	1.5
Economic Benefits from Additional Vehicle Use .....	15.1	8.4	14.7	8.2
Reduced Climate Damages from GHG Emissions <sup>a</sup> .....	34.9	34.9	32.9	32.9
Reduced Health Damages from Non-GHG Emissions .....	38.8	20.7	37.2	20.0
Increased U.S. Energy Security .....	8.9	4.7	8.1	4.3
<b>Total Benefits</b> .....	<b>276</b>	<b>165</b>	<b>261</b>	<b>156</b>
<b>Net Benefits</b> .....	<b>245</b>	<b>144</b>	<b>231</b>	<b>136</b>

**Note:**

<sup>a</sup>Benefits and net benefits use the 3 percent average global SCC value applied only to CO<sub>2</sub> emissions; GHG reductions include CO<sub>2</sub>, CH<sub>4</sub>, N<sub>2</sub>O and HFC reductions, and include benefits to other nations as well as the U.S. See Draft RIA Chapter 8.5 and Preamble Section IX.G for further discussion.

Table IX-34, Table IX-35, and Table IX-36 report benefits and cost from the perspective of reducing GHG. Table IX-34 shows the annual impacts and net benefits of the preferred alternative for

selected future years, together with the net present values of cumulative annual impacts from 2018 through 2050, discounted at 3 percent and 7 percent rates. Table IX-35 and Table IX-36

show the discounted lifetime costs and benefits for each model year affected by the Phase 2 standards at 3 percent and 7 percent discount rates, respectively.

**TABLE IX-34—ANNUAL BENEFITS & COSTS OF THE PREFERRED ALTERNATIVE AND NET PRESENT VALUES AT 3% AND 7% DISCOUNT RATES USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**

[Billions of 2012\$]<sup>a</sup>

	2018	2021	2024	2030	2035	2040	2050	NPV, 3%	NPV, 7%
Vehicle program .....	-0.1	-2.4	-3.7	-5.4	-5.9	-6.3	-7.0	-86.8	-41.1
Maintenance .....	0.0	0.0	-0.1	-0.1	-0.1	-0.1	-0.1	-1.8	-0.9
Pre-tax fuel .....	0.2	1.7	6.9	24.0	37.2	47.8	57.5	495.6	206.7
Energy security .....	0.0	0.1	0.3	1.3	2.2	2.9	3.5	28.9	11.9
Accidents/Congestion/Noise .....	0.0	-0.1	-0.3	-0.5	-0.7	-0.8	-0.9	-9.3	-4.2
Refueling impacts .....	0.0	0.0	0.1	0.4	0.7	0.9	1.2	9.4	3.9
Travel value .....	0.0	0.4	1.0	1.9	2.4	2.9	3.3	34.2	15.3
Non-GHG impacts .....	0.0	0.4	1.0	3.3	4.8	5.7	7.0	69.	26.6
	to	to	to	to	to	to	to	to	to
	0.1	0.9	2.4	8.3	12.1	14.3	17.5	157.0	60.4
SCC <sup>b,c</sup>									
SCC CO <sub>2</sub> ; 5% Avg .....	0.0	0.1	0.4	1.5	2.5	3.3	5.0	22.1	22.1
SCC CO <sub>2</sub> ; 3% Avg .....	0.0	0.3	1.3	4.8	7.4	9.7	13.6	103.1	103.1
SCC CO <sub>2</sub> ; 2.5% Avg .....	0.1	0.5	1.9	6.9	10.6	13.7	18.5	164.1	164.1
SCC CO <sub>2</sub> ; 3% 95th .....	0.1	1.0	4.0	14.6	23.2	30.3	42.0	320.5	320.5
Net benefits <sup>d</sup>									
SCC CO <sub>2</sub> ; 5% Avg .....	0.2	0.4	6.4	28.8	46.8	60.6	74.6	605.8	257.1
SCC CO <sub>2</sub> ; 3% Avg .....	0.2	0.7	7.3	32.1	51.7	66.9	83.2	686.8	338.1
SCC CO <sub>2</sub> ; 2.5% Avg .....	0.2	0.8	7.9	34.2	54.9	70.9	88.2	747.8	399.1
SCC CO <sub>2</sub> ; 3% 95th .....	0.3	1.3	10.0	41.9	67.5	87.6	111.7	904.1	555.5

**Notes:**

<sup>a</sup>Positive values denote decreased social costs (benefits); negative values denote increased social costs. For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Net present value of reduced CO<sub>2</sub> emissions is calculated differently than other benefits. The same discount rate used to discount the value of damages from future emissions (SC-CO<sub>2</sub> at 5, 3, 2.5 percent) is used to calculate net present value of SC-CO<sub>2</sub> for internal consistency. Refer to the SCC TSD for more detail.

<sup>c</sup>Section IX.G notes that SCCO<sub>2</sub> increases over time. For the years 2012–2050, the SC-CO<sub>2</sub> estimates range as follows: for Average SC-CO<sub>2</sub> at 5%: \$12–\$28; for Average SC-CO<sub>2</sub> at 3%: \$37–\$77; for Average SC-CO<sub>2</sub> at 2.5%: \$58–\$105; and for 95th percentile SC-CO<sub>2</sub> at 3%: \$105–\$237. Section IX.G also presents these SC-CO<sub>2</sub> estimates.

<sup>a</sup> Net impacts are the summation of results within columns of the table with the exception that the net impacts at each SC-CO<sub>2</sub> value include only the SC-CO<sub>2</sub> impacts at that value.

**TABLE IX-35—DISCOUNTED MODEL YEAR LIFETIME BENEFITS & COSTS OF THE PREFERRED ALTERNATIVE USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**  
[Billions of 2012\$ discounted at 3%]<sup>a</sup>

	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	Sum
Vehicle program .....	-0.1	-0.1	-0.1	-2.0	-1.9	-1.9	-2.8	-2.7	-2.7	-3.7	-3.6	-3.5	-25.1
Maintenance .....	-0.1	0.0	0.0	-0.1	-0.1	-0.1	-0.1	-0.1	-0.1	-0.1	-0.1	-0.1	-1.1
Pre-tax fuel .....	1.9	1.9	1.8	11.1	11.5	11.9	18.9	19.6	20.2	24.1	24.1	24.1	171.1
Energy security .....	0.1	0.1	0.1	0.5	0.6	0.6	1.0	1.1	1.1	1.4	1.4	1.4	9.3
Accidents/Congestion/Noise .....	-0.1	-0.1	-0.2	-0.4	-0.4	-0.4	-0.4	-0.4	-0.4	-0.4	-0.4	-0.4	-4.2
Refueling .....	0.0	0.0	0.0	0.2	0.2	0.2	0.3	0.3	0.4	0.5	0.5	0.5	3.1
Travel value .....	0.6	0.6	0.7	1.5	1.5	1.5	1.4	1.4	1.4	1.4	1.4	1.4	14.9
Non-GHG .....	0.2	0.2	0.2	2.0	2.0	2.0	2.9	3.0	2.6	3.1	3.1	3.1	24.4
to	to	to	to	to	to	to	to	to	to	to	to	to	to
to	0.5	0.4	0.4	4.5	4.5	4.5	6.6	6.8	5.9	6.9	6.9	7.0	55.0
SCC; <sup>b,c</sup>													
SCC CO <sub>2</sub> ; 5% Avg .....	0.1	0.1	0.1	0.5	0.5	0.5	0.9	0.9	0.9	1.1	1.1	1.1	7.8
SCC CO <sub>2</sub> ; 3% Avg .....	0.4	0.4	0.4	2.2	2.3	2.3	3.7	3.9	4.0	4.8	4.8	4.9	34.0
SCC CO <sub>2</sub> ; 2.5% Avg .....	0.6	0.6	0.6	3.4	3.5	3.6	5.8	6.1	6.3	7.6	7.6	7.7	53.4
SCC CO <sub>2</sub> ; 3% 95th .....	1.1	1.1	1.1	6.6	6.9	7.2	11.5	12.0	12.4	14.9	15.0	15.1	105.0
Net benefits <sup>d</sup>													
SCC CO <sub>2</sub> ; 5% Avg .....	2.8	2.7	2.7	14.6	15.1	15.5	23.9	25.0	25.1	29.2	29.4	29.4	215.5
SCC CO <sub>2</sub> ; 3% Avg .....	3.0	3.0	3.0	16.2	16.8	17.3	26.8	28.0	28.2	33.0	33.1	33.2	241.7
SCC CO <sub>2</sub> ; 2.5% Avg .....	3.2	3.2	3.2	17.4	18.1	18.6	28.9	30.2	30.5	35.7	35.9	36.0	261.1
SCC CO <sub>2</sub> ; 3% 95th .....	3.8	3.8	3.7	20.7	21.5	22.1	34.5	36.0	36.6	43.1	43.3	43.5	312.7

**Notes:**

<sup>a</sup> Positive values denote decreased social costs (benefits); negative values denote increased social costs. For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.c

<sup>b</sup> Net present value of reduced CO<sub>2</sub> emissions is calculated differently than other benefits. The same discount rate used to discount the value of damages from future emissions (SC-CO<sub>2</sub> at 5, 3, 2.5 percent) is used to calculate net present value of SCC for internal consistency. Refer to the SCC TSD for more detail.

<sup>c</sup> Section IX.G notes that SCC increases over time. For the years 2012–2050, the SCC estimates range as follows: for Average SC-CO<sub>2</sub> at 5%: \$12–\$28; for Average SC-CO<sub>2</sub> at 3%: \$37–\$77; for Average SC-CO<sub>2</sub> at 2.5%: \$58–\$105; and for 95th percentile SC-CO<sub>2</sub> at 3%: \$105–\$237. Section IX.G also presents these SCC estimates.

<sup>d</sup> Net impacts are the summation of results within columns of the table with the exception that the net impacts at each SC-CO<sub>2</sub> value include only the SCCO<sub>2</sub> impacts at that value.

**TABLE IX-36—DISCOUNTED MODEL YEAR LIFETIME BENEFITS & COSTS OF THE PREFERRED ALTERNATIVE USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**  
[Billions of 2012\$ discounted at 7%]<sup>a</sup>

	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	Sum
Vehicle program .....	-0.1	-0.1	-0.1	-1.6	-1.4	-1.4	-1.9	-1.8	-1.7	-2.3	-2.1	-2.0	-16.6
Maintenance .....	0.0	0.0	0.0	-0.1	-0.1	-0.1	-0.1	-0.1	-0.1	-0.1	-0.1	0.0	-0.6
Pre-tax fuel .....	1.4	1.3	1.2	6.9	6.9	6.8	10.5	10.4	10.4	11.9	11.5	11.0	90.1
Energy security .....	0.1	0.1	0.1	0.3	0.3	0.4	0.5	0.6	0.6	0.7	0.7	0.6	4.8
Accidents/Congestion/Noise .....	-0.1	-0.1	-0.1	-0.3	-0.3	-0.2	-0.2	-0.2	-0.2	-0.2	-0.2	-0.2	-2.4
Refueling .....	0.0	0.0	0.0	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2	0.2	1.6
Travel value .....	0.4	0.4	0.4	0.9	0.9	0.8	0.8	0.8	0.7	0.7	0.7	0.6	8.2
Non-GHG .....	0.1	0.1	0.1	1.1	1.1	1.0	1.4	1.4	1.2	1.3	1.3	1.3	11.5
to	to	to	to	to	to	to	to	to	to	to	to	to	to
to	0.3	0.3	0.3	2.5	2.4	2.3	3.3	3.2	2.7	3.0	2.9	2.8	26.0
SCC <sup>b,c</sup>													
SCC CO <sub>2</sub> ; 5% Avg .....	0.1	0.1	0.1	0.5	0.5	0.5	0.9	0.9	0.9	1.1	1.1	1.1	7.8
SCC CO <sub>2</sub> ; 3% Avg .....	0.4	0.4	0.4	2.2	2.3	2.3	3.7	3.9	4.0	4.8	4.8	4.9	34.0
SCC CO <sub>2</sub> ; 2.5% Avg .....	0.6	0.6	0.6	3.4	3.5	3.6	5.8	6.1	6.3	7.6	7.6	7.7	53.4
SCC CO <sub>2</sub> ; 3% 95th .....	1.1	1.1	1.1	6.6	6.9	7.2	11.5	12.0	12.4	14.9	15.0	15.1	105.0
Net benefits <sup>d</sup>													
SCC CO <sub>2</sub> ; 5% Avg .....	1.9	1.8	1.7	8.7	8.7	8.7	13.0	13.1	12.7	14.3	13.8	13.4	111.8
SCC CO <sub>2</sub> ; 3% Avg .....	2.2	2.1	2.0	10.3	10.4	10.5	15.8	16.1	15.8	18.0	17.6	17.2	138.0
SCC CO <sub>2</sub> ; 2.5% Avg .....	2.4	2.3	2.2	11.5	11.7	11.8	17.9	18.3	18.1	20.7	20.4	20.0	157.4
SCC CO <sub>2</sub> ; 3% 95th .....	2.9	2.8	2.8	14.8	15.1	15.3	23.6	24.2	24.2	28.1	27.8	27.4	209.0

**Notes:**

<sup>a</sup> Positive values denote decreased social costs (benefits); negative values denote increased social costs. For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup> Net present value of reduced CO<sub>2</sub> emissions is calculated differently than other benefits. The same discount rate used to discount the value of damages from future emissions (SC-CO<sub>2</sub> at 5, 3, 2.5 percent) is used to calculate net present value of SCC for internal consistency. Refer to the SCC TSD for more detail.

<sup>c</sup> Section IX.G notes that SC-CO<sub>2</sub> increases over time. For the years 2012–2050, the SC-CO<sub>2</sub> estimates range as follows: for Average SC-CO<sub>2</sub> at 5%: \$12–\$28; for Average SC-CO<sub>2</sub> at 3%: \$37–\$77; for Average SC-CO<sub>2</sub> at 2.5%: \$58–\$105; and for 95th percentile SCCO<sub>2</sub> at 3%: \$105–\$237. Section IX.G also presents these SC-CO<sub>2</sub> estimates.

<sup>d</sup> Net impacts are the summation of results within columns of the table with the exception that the net impacts at each SC-CO<sub>2</sub> value include only the SC-CO<sub>2</sub> impacts at that value.

The agencies note that this proposal accounts for other regulations that have been finalized. Until regulations are finalized, there is no assurance they will

be implemented and thus any potential provisions of those potential regulations are uncertain. The agencies note that NHTSA has started the rulemaking

process for regulations that involve technologies that could potentially affect medium- and heavy-duty fuel consumption (e.g. vehicle speed

limiters, etc.). If any such rulemakings are finalized prior to this rulemaking becoming final, this rulemaking will take those regulations into account.

#### *L. Employment Impacts*

Executive Order 13563 (January 18, 2011) directs federal agencies to consider regulatory impacts on, among other criteria, job creation.<sup>755</sup> According to the Executive Order “Our regulatory system must protect public health, welfare, safety, and our environment while promoting economic growth, innovation, competitiveness, and job creation. It must be based on the best available science.” Analysis of employment impacts of a regulation is not part of a standard benefit-cost analysis (except to the extent that labor costs contribute to costs). Employment impacts of federal rules are of general interest, however, and have been particularly so, historically, in the auto sector during periods of challenging labor market conditions. For this reason, we are describing the connections of these proposed standards to employment in the regulated sector, the motor vehicle manufacturing sector, as well as the motor vehicle body and trailer and motor vehicle parts manufacturing sectors.

The overall effect of the proposed rules on motor vehicle sector employment depends on the relative magnitude of output and substitution effects, described below. Because we do not have quantitative estimates of the output effect, and only a partial estimate of the substitution effect, we cannot reach a quantitative estimate of the overall employment effects of the proposed rules on motor vehicle sector employment or even whether the total effect will be positive or negative.

According to the U.S. Bureau of Labor Statistics, in 2014, about 850,000 people in the U.S. were employed in the Motor Vehicle and Parts Manufacturing Sector (NAICS 3361, 3362, and 3363),<sup>756</sup> the directly regulated sector. The employment effects of these proposed rules are expected to expand beyond the regulated sector. Though some of the parts used to achieve the proposed standards are likely to be built by motor vehicle manufacturers (including trailer manufacturers) themselves, the motor vehicle parts manufacturing sector also plays a significant role in providing those parts, and will also be affected by

changes in vehicle sales. Changes in truck sales, discussed in Section IX.F. (2), could also affect employment for truck and trailer vendors. As discussed in Section IX.C., this proposed rule is expected to reduce the amount of fuel these vehicles use, and thus affect the petroleum refinery and supply industries as well. Finally, since the net reduction in cost associated with these proposed rules is expected to lead to lower transportation and shipping costs, in a competitive market a substantial portion of those cost savings will be passed along to consumers, who then will have additional discretionary income (how much of the cost is passed along to consumers depends on market structure and the relative price elasticities). The proposed rules are not expected to have any notable inflationary or recessionary effect.

The employment effects of environmental regulation are difficult to disentangle from other economic changes and business decisions that affect employment, over time and across regions and industries. In light of these difficulties, we lean on economic theory to provide a constructive framework for approaching these assessments and for better understanding the inherent complexities in such assessments. Neoclassical microeconomic theory describes how profit-maximizing firms adjust their use of productive inputs in response to changes in their economic conditions.<sup>757</sup> Berman and Bui (2001, pp. 274–75) model two components that drive changes in firm-level labor demand: Output effects and substitution effects.<sup>758</sup> Regulation can affect the profit-maximizing quantity of output by changing the marginal cost of production. If regulation causes marginal cost to increase, it will place upward pressure on output prices, leading to a decrease in the quantity demanded, and resulting in a decrease in production. The output effect

describes how, holding labor intensity constant, a decrease in production causes a decrease in labor demand. As noted by Berman and Bui, although many assume that regulation increases marginal cost, it need not be the case. A regulation could induce a firm to upgrade to less polluting and more efficient equipment that lowers marginal production costs, or it may induce use of technologies that may prove popular with buyers or provide positive network externalities (see Section IX. A. for discussion of this effect). In such a case, output could increase.

The substitution effect describes how, holding output constant, regulation affects labor intensity of production. Although increased environmental regulation may increase use of pollution control equipment and energy to operate that equipment, the impact on labor demand is ambiguous. For example, equipment inspection requirements, specialized waste handling, or pollution technologies that alter the production process may affect the number of workers necessary to produce a unit of output. Berman and Bui (2001) model the substitution effect as the effect of regulation on pollution control equipment and expenditures required by the regulation and the corresponding change in labor intensity of production.

In summary, as output and substitution effects may be positive or negative, theory alone cannot predict the direction of the net effect of regulation on labor demand at the level of the regulated firm. Operating within the bounds of standard economic theory, empirical estimation of net employment effects on regulated firms is possible when data and methods of sufficient detail and quality are available. The literature, however, illustrates difficulties with empirical estimation. For example, studies sometimes rely on confidential plant-level employment data from the U.S. Census Bureau, possibly combined with pollution abatement expenditure data that are too dated to be reliably informative. In addition, the most commonly used empirical methods do not permit estimation of net effects.

The conceptual framework described thus far focused on regulatory effects on plant-level decisions within a regulated industry. Employment impacts at an individual plant do not necessarily represent impacts for the sector as a whole. The approach must be modified when applied at the industry level.

At the industry level, labor demand is more responsive if: (1) The price elasticity of demand for the product is high, (2) other factors of production can

<sup>755</sup> See Layard, P.R.G., and A.A. Walters (1978), *Microeconomic Theory* (McGraw-Hill, Inc.), Chapter 9 (Docket ID EPA-HQ-OAR-2014-0827), a standard microeconomic theory textbook treatment, for a discussion.

<sup>756</sup> Berman, E. and L.T.M. Bui (2001). “Environmental Regulation and Labor Demand: Evidence from the South Coast Air Basin.” *Journal of Public Economics* 79(2): 265–295 (Docket EPA-HQ-OAR-2014-0827). The authors also discuss a third component, the impact of regulation on factor prices, but conclude that this effect is unlikely to be important for large competitive factor markets, such as labor and capital. Morgenstern, Pizer and Shih (Morgenstern, Richard D., William A. Pizer, and Jhih-Shyang Shih (2002). “Jobs versus the Environment: An Industry-Level Perspective.” *Journal of Environmental Economics and Management* 43: 412–436) use a similar model, but they break the employment effect into three parts: (1) A demand effect; (2) a cost effect; and (3) a factor-shift effect.

<sup>755</sup> Available at [http://www.whitehouse.gov/sites/default/files/omb/inforeg/eo12866/eo13563\\_01182011.pdf](http://www.whitehouse.gov/sites/default/files/omb/inforeg/eo12866/eo13563_01182011.pdf).

<sup>756</sup> U.S. Department of Labor, Bureau of Labor Statistics. “Automotive Industry; Employment, Earnings, and Hours.” <http://www.bls.gov/iag/tgs/iagauto.htm>, accessed 8/18/14.

be easily substituted for labor, (3) the supply of other factors is highly elastic, or (4) labor costs are a large share of total production costs.<sup>759</sup> For example, if all firms in an industry are faced with the same regulatory compliance costs and product demand is inelastic, then industry output may not change much, and output of individual firms may change slightly.<sup>760</sup> In this case, the output effect may be small, while the substitution effect depends on input substitutability. Suppose, for example, that new equipment for fuel efficiency improvements requires labor to install and operate. In this case, the substitution effect may be positive, and with a small output effect, the total effect may be positive. As with potential effects for an individual firm, theory cannot determine the sign or magnitude of industry-level regulatory effects on labor demand. Determining these signs and magnitudes requires additional sector-specific empirical study. For environmental rules, much of the data needed for these empirical studies is not publicly available, would require significant time and resources in order to access confidential U.S. Census data for research, and also would not be necessary for other components of a typical RIA.

In addition to changes to labor demand in the regulated industry, net employment impacts encompass changes in other related sectors. For example, the proposed standards are expected to increase demand for fuel-saving technologies. This increased demand may increase revenue and employment in the firms providing these technologies. At the same time, the regulated industry is purchasing the equipment, and these costs may impact labor demand at regulated firms. Therefore, it is important to consider the net effect of compliance actions on employment across multiple sectors or industries.

If the U.S. economy is at full employment, even a large-scale environmental regulation is unlikely to have a noticeable impact on aggregate net employment.<sup>761</sup> Instead, labor would primarily be reallocated from one

productive use to another, and net national employment effects from environmental regulation would be small and transitory (e.g., as workers move from one job to another).<sup>762</sup>

Affected sectors may experience transitory effects as workers change jobs. Some workers may retrain or relocate in anticipation of new requirements or require time to search for new jobs, while shortages in some sectors or regions could bid up wages to attract workers. These adjustment costs can lead to local labor disruptions. Although the net change in the national workforce is expected to be small, localized reductions in employment may adversely impact individuals and communities just as localized increases may have positive impacts.

If the economy is operating at less than full employment, economic theory does not clearly indicate the direction or magnitude of the net impact of environmental regulation on employment; it could cause either a short-run net increase or short-run net decrease.<sup>763</sup> An important research question is how to accommodate unemployment as a structural feature in economic models. This feature may be important in assessing large-scale regulatory impacts on employment.<sup>764</sup>

Environmental regulation may also affect labor supply. In particular, pollution and other environmental risks may impact labor productivity or employees' ability to work.<sup>765</sup> While the theoretical framework for analyzing labor supply effects is analogous to that for labor demand, it is more difficult to study empirically. There is a small emerging literature described in the next section that uses detailed labor and environmental data to assess these impacts.

To summarize, economic theory provides a framework for analyzing the impacts of environmental regulation on employment. The net employment effect incorporates expected employment changes (both positive and negative) in

the regulated sector and elsewhere. Labor demand impacts for regulated firms, and also for the regulated industry, can be decomposed into output and substitution effects which may be either negative or positive. Estimation of net employment effects for regulated sectors is possible when data of sufficient detail and quality are available. Finally, economic theory suggests that labor supply effects are also possible. In the next section, we discuss the empirical literature.

#### (1) Current State of Knowledge Based on the Peer-Reviewed Literature

In the labor economics literature there is an extensive body of peer-reviewed empirical work analyzing various aspects of labor demand, relying on the above theoretical framework.<sup>766</sup> This work focuses primarily on the effects of employment policies, e.g. labor taxes, minimum wage, etc.<sup>767</sup> In contrast, the peer-reviewed empirical literature specifically estimating employment effects of environmental regulations is very limited. Several empirical studies<sup>768</sup> suggest that net employment impacts may be zero or slightly positive but small even in the regulated sector. Other research suggests that more highly regulated counties may generate fewer jobs than less regulated ones.<sup>769</sup> However, since these latter studies compare more regulated to less regulated counties, they overstate the net national impact of regulation to the extent that regulation causes plants to locate in one area of the country rather than another. List *et al.* (2003)<sup>770</sup> find

<sup>766</sup> See Hamermesh (1993), *Labor Demand* (Princeton, NJ: Princeton University Press), Chapter 2 (Docket EPA-HQ-OAR-2014-0827) for a detailed treatment.

<sup>767</sup> See Ehrenberg, Ronald G., and Robert S. Smith (2000), *Modern Labor Economics: Theory and Public Policy* (Addison Wesley Longman, Inc.), Chapter 4 (Docket EPA-HQ-OAR-2014-0827), for a concise overview.

<sup>768</sup> Berman, E. and L.T.M. Bui (2001). "Environmental Regulation and Labor Demand: Evidence from the South Coast Air Basin." *Journal of Public Economics* 79(2): 265–295 (Docket EPA-HQ-OAR-2014-0827). Morgenstern, Richard D., William A. Pizer, and Jhih-Shyang Shih. "Jobs Versus the Environment: An Industry-Level Perspective." *Journal of Environmental Economics and Management* 43 (2002): 412–436; Gray *et al.* (2014), and Ferris, Shadbegian and Wolverton (2014).

<sup>769</sup> Greenstone, M. (2002). "The Impacts of Environmental Regulations on Industrial Activity: Evidence from the 1970 and 1977 Clean Air Act Amendments and the Census of Manufactures." *Journal of Political Economy* 110(6): 1175–1219 (Docket EPA-HQ-OAR-2014-0827); Walker, Reed. (2011). "Environmental Regulation and Labor Reallocation." *American Economic Review: Papers and Proceedings* 101(3): 442–447 (Docket EPA-HQ-OAR-2014-0827).

<sup>770</sup> List, J.A., D.L. Millimet, P.G. Fredriksson, and W.W. McHone (2003). "Effects of Environmental Regulations on Manufacturing Plant Births:

<sup>759</sup> See Ehrenberg, Ronald G., and Robert S. Smith (2000), *Modern Labor Economics: Theory and Public Policy* (Addison Wesley Longman, Inc.), p. 108.

<sup>760</sup> This discussion draws from Berman, E. and L.T.M. Bui (2001). "Environmental Regulation and Labor Demand: Evidence from the South Coast Air Basin." *Journal of Public Economics* 79(2): 265–295 (Docket EPA-HQ-OAR-2014-0827), p. 293.

<sup>761</sup> Full employment is a conceptual target for the economy where everyone who wants to work and is available to do so at prevailing wages is actively employed. The unemployment rate at full employment is not zero.

<sup>762</sup> Arrow *et al.* (1996). "Benefit-Cost Analysis in Environmental, Health, and Safety Regulation: A Statement of Principles." American Enterprise Institute, the Annapolis Center, and Resources for the Future. See discussion on bottom of p. 6. In practice, distributional impacts on individual workers can be important, as discussed later in this section.

<sup>763</sup> Schmalensee, Richard, and Robert N. Stavins. "A Guide to Economic and Policy Analysis of EPA's Transport Rule." White paper commissioned by Excelsior Corporation, March 2011.

<sup>764</sup> Klaiber, H. Allen, and V. Kerry Smith (2012). "Developing General Equilibrium Benefit Analyses for Social Programs: An Introduction and Example." *Journal of Benefit-Cost Analysis* 3(2).

<sup>765</sup> E.g. Graff Zivin, J., and M. Neidell (2012). "The Impact of Pollution on Worker Productivity." *American Economic Review* 102: 3652–3673.

some evidence that this type of geographic relocation may be occurring. Overall, the peer-reviewed literature does not contain evidence that environmental regulation has a large impact on net employment (either negative or positive) in the long run across the whole economy.

Analytic challenges make it very difficult to accurately produce net employment estimates for the whole economy that would appropriately capture the way in which costs, compliance spending, and environmental benefits propagate through the macro-economy. Quantitative estimates are further complicated by the fact that macroeconomic models often have very little sectoral detail and usually assume that the economy is at full employment. EPA is currently in the process of seeking input from an independent expert panel on modeling economy-wide impacts, including employment effects. For more information, see: <https://federalregister.gov/a/2014-02471>.

## (2) Employment Impacts in the Motor Vehicle and Parts Manufacturing Sector

This section describes changes in employment in the motor vehicle, trailer, and parts (hence, motor vehicle) manufacturing sectors due to these proposed rules. We focus on the motor vehicle manufacturing sector because it is directly regulated, and because it is likely to bear a substantial share of changes in employment due to these proposed rules. We include discussion of effects on the parts manufacturing sector, because the motor vehicle manufacturing sector can either produce parts internally or buy them from an external supplier, and we do not have estimates of the likely breakdown of effect between the two sectors.

We follow the theoretical structure of Berman and Bui<sup>771</sup> of the impacts of regulation in employment in the regulated sectors. In Berman and Bui's (2001, p. 274–75) theoretical model, as described above, the change in a firm's labor demand arising from a change in regulation is decomposed into two main components: Output and substitution effects.<sup>772</sup> As the output and

substitution effects may be both positive, both negative, or some combination, standard neoclassical theory alone does not point to a definitive net effect of regulation on labor demand at regulated firms.

Following the Berman and Bui framework for the impacts of regulation on employment in the regulated sector, we consider two effects for the motor vehicle sector: The output effect and the substitution effect.

### (a) The Output Effect

If truck or trailer sales increase, then more people will be required to assemble trucks, trailers, and their components. If truck or trailer sales decrease, employment associated with these activities will decrease. The effects of this proposed rulemaking on HD vehicle sales thus depend on the perceived desirability of the new vehicles. On one hand, this proposed rulemaking will increase truck and trailer costs; by itself, this effect would reduce truck and trailer sales. In addition, while decreases in truck performance would also decrease sales, this program is not expected to have any negative effect on truck performance. On the other hand, this proposed rulemaking will reduce the fuel costs of operating the trucks; by itself, this effect would increase truck sales, especially if potential buyers have an expectation of higher fuel prices. The agencies have not made an estimate of the potential change in truck or trailer sales. However, as discussed in IX. E., the agencies have estimated an increase in vehicle miles traveled (*i.e.*, VMT rebound) due to the reduced operating costs of trucks meeting these proposed standards. Since increased VMT is most likely to be met with more drivers and more trucks, our projection of VMT rebound is suggestive of an increase in vehicle sales and truck driver employment (recognizing that these increases may be partially offset by a decrease in manufacturing and sales for equipment of other modes of transportation such as rail cars or barges).

### (b) The Substitution Effect

The output effect, above, measures the effect due to new truck and trailer sales only. The substitution effect includes

the impacts due to the changes in technologies needed for vehicles to meet the proposed standards, separate from the effect on output (that is, as though holding output constant). This effect includes both changes in employment due to incorporation of abatement technologies and overall changes in the labor intensity of manufacturing. We present estimates for this effect to provide a sense of the order of magnitude of expected impacts on employment, which we expect to be small in the automotive sector, and to repeat that regulations may have positive as well as negative effects on employment.

One way to estimate this effect, given the cost estimates for complying with the proposed rule, is to use the ratio of workers to each \$1 million of expenditures in that sector. The use of these ratios has both advantages and limitations. It is often possible to estimate these ratios for quite specific sectors of the economy: For instance, it is possible to estimate the average number of workers in the motor vehicle body and trailer manufacturing sector per \$1 million spent in the sector, rather than use the ratio from another, more aggregated sector, such as motor vehicle manufacturing. As a result, it is not necessary to extrapolate employment ratios from possibly unrelated sectors. On the other hand, these estimates are averages for the sectors, covering all the activities in those sectors; they may not be representative of the labor required when expenditures are required on specific activities, or when manufacturing processes change sufficiently that labor intensity changes. For instance, the ratio for the motor vehicle manufacturing sector represents the ratio for all vehicle manufacturing, not just for emissions reductions associated with compliance activities. In addition, these estimates do not include changes in sectors that supply these sectors, such as steel or electronics producers. They thus may best be viewed as the effects on employment in the motor vehicle sector due to the changes in expenditures in that sector, rather than as an assessment of all employment changes due to these changes in expenditures. In addition, this approach estimates the effects of increased expenditures while holding constant the labor intensity of manufacturing; it does not take into account changes in labor intensity due to changes in the nature of production. This latter effect could either increase or

Evidence from a Propensity Score Matching Estimator." *The Review of Economics and Statistics* 85(4): 944–952 (Docket EPA–HQ–OAR–2014–0827).

<sup>771</sup> Berman, E. and L.T.M. Bui (2001). "Environmental Regulation and Labor Demand: Evidence from the South Coast Air Basin." *Journal of Public Economics* 79(2): 265–295 (Docket EPA–HQ–OAR–2014–0827).

<sup>772</sup> The authors also discuss a third component, the impact of regulation on factor prices, but conclude that this effect is unlikely to be important for large competitive factor markets, such as labor

and capital. Morgenstern, Pizer and Shih (2002) use a similar model, but they break the employment effect into three parts: (1) The demand effect; (2) the cost effect; and (3) the factor-shift effect. See Morgenstern, Richard D., William A. Pizer, and Jhih-Shyang Shih. "Jobs Versus the Environment: An Industry-Level Perspective." *Journal of Environmental Economics and Management* 43 (2002): 412–436 (Docket EPA–HQ–OAR–2014–0827).



decrease the employment impacts estimated here.<sup>773</sup>

Some of the costs of these proposed rules will be spent directly in the motor vehicle manufacturing sector, but it is also likely that some of the costs will be spent in the motor vehicle body and trailer and motor vehicle parts manufacturing sectors. The analysis here draws on estimates of workers per \$1 million of expenditures for each of these sectors.

There are several public sources for estimates of employment per \$1 million expenditures. The U.S. Bureau of Labor Statistics (BLS) provides its Employment Requirements Matrix (ERM),<sup>774</sup> which provides direct estimates of the employment per \$1 million in sales of goods in 202 sectors. The values considered here are for Motor Vehicle Manufacturing (NAICS 3361), Motor Vehicle Body and Trailer Manufacturing (NAICS 3362), and Motor Vehicle Parts Manufacturing (NAICS 3363) for 2012.

The Census Bureau provides the Annual Survey of Manufacturers<sup>775</sup> (ASM), a subset of the Economic Census, based on a sample of establishments; though the Census itself is more complete, it is conducted only every 5 years, while the ASM is annual. Both include more sectoral detail than the BLS ERM: For instance, while the ERM includes the Motor Vehicle Manufacturing sector, the ASM and Economic Census have detail at the 6-digit NAICS code level (*e.g.*, light truck and utility vehicle manufacturing). While the ERM provides direct estimates of employees/\$1 million in expenditures, the ASM and Economic Census separately provide number of employees and value of shipments; the direct employment estimates here are the ratio of those values. At this time, the Economic Census values for 2012

(the most recent year) are not fully available; we therefore do not report them, and instead provide the 2011 ASM results (the most recent available). The values reported are for Motor Vehicle Manufacturing (NAICS 3361), Light Truck and Utility Vehicle Manufacturing (NAICS 336112), Heavy Duty Truck Manufacturing (NAICS 33612), Motor Vehicle Body and Trailer manufacturing (NAICS 3362), and Motor Vehicle Parts Manufacturing (NAICS 3363).

Draft RIA Chapter 9.9 provides the details on the values of workers per \$1 million in expenditures for the sectors mentioned above. In 2012\$, these range from 0.4 workers per \$1 million for light truck & utility vehicle manufacturing in the ASM, to 2.8 workers per \$1 million in expenditures for Motor Vehicle Body and Trailer Manufacturing in the ASM. These values are then adjusted to remove the employment effects of imports through use of a ratio of domestic production to domestic sales of 0.78.<sup>776</sup>

Over time, the amount of labor needed in the motor vehicle industry has changed: Automation and improved methods have led to significant productivity increases. The BLS ERM, for instance, provided estimates that, in 1993, 1.33 workers in the Motor Vehicle Manufacturing sector were needed per \$1 million, but only 0.46 workers by 2012 (in 2005\$).<sup>777</sup> Because the ERM is available annually for 1993–2012, we used these data to estimate productivity improvements over time. We then used these productivity estimates to project the ERM through 2027, and to adjust the ASM values for 2011. RIA Chapter 9.9.2.2 provides detail on these calculations.

Finally, to simplify the presentation and give a range of estimates, we compared the projected employment

among the 3 sectors for the ERM and ASM, and we provide only the maximum and minimum employment effects estimated for the ERM and the ASM. We provide the range rather than a point estimate because of the inherent difficulties in estimating employment impacts; the range gives an estimate of the expected magnitude. The ERM estimates in the Motor Vehicle Parts Manufacturing Sector are consistently the maximum values. The ERM estimates in the Motor Vehicle Body and Trailer Manufacturing Sector are the minimum values for all years but 2018–2019, when the ASM values for Light Truck and Utility Vehicle Manufacturing provide the minimum values.

Section 0 of the Preamble discusses the vehicle cost estimates developed for these proposed rules. The final step in estimating employment impacts is to multiply costs (in \$ millions) by workers per \$1 million in costs, to estimate employment impacts in the regulated and parts manufacturing sectors. Increased costs of vehicles and parts would, by itself, and holding labor intensity constant, be expected to increase employment between 2018 and 2027 from none to a few thousand jobs each year.

While we estimate employment impacts, measured in job-years, beginning with program implementation, some of these employment gains may occur earlier as motor vehicle manufacturers and parts suppliers hire staff in anticipation of compliance with the standards. A job-year is a way to calculate the amount of work needed to complete a specific task. For example, a job-year is one year of work for one person.

TABLE IX–37—EMPLOYMENT EFFECTS DUE TO INCREASED COSTS OF VEHICLES AND PARTS (SUBSTITUTION EFFECT), IN JOB-YEARS

Year	Costs (millions of 2012\$)	Minimum employment due to substitution effect (ERM estimates, expenditures in the Parts Sector <sup>a</sup> )	Maximum employment due to substitution effect (ERM estimates, expenditures in the Body and Trailer Mfg Sector)
2018 .....	116	0	100
2019 .....	113	0	100

<sup>773</sup> As noted above, Morgenstern et al. (2002) separate the effect of holding output constant into two effects: The cost effect, which holds labor intensity constant, and the factor shift effect, which estimates those changes in labor intensity.

<sup>774</sup> [http://www.bls.gov/emp/ep\\_data\\_emp\\_requirements.htm](http://www.bls.gov/emp/ep_data_emp_requirements.htm).

<sup>775</sup> <http://www.census.gov/manufacturing/asm/index.html>.

<sup>776</sup> To estimate the proportion of domestic production affected by the change in sales, we use data from Ward's Automotive Group for total truck production in the U.S. compared to total truck sales in the U.S. For the period 2004–2013, the proportion is 78 percent (Docket EPA–HQ–OAR–2014–0827), ranging from 68 percent (2009) to 83 percent (2012) over that time.

<sup>777</sup> [http://www.bls.gov/emp/ep\\_data\\_emp\\_requirements.htm](http://www.bls.gov/emp/ep_data_emp_requirements.htm); this analysis used data for sectors 81 (Motor Vehicle Manufacturing), 82 (Motor Vehicle Body and Trailer Manufacturing), and 83 (Motor Vehicle Parts Manufacturing) from “Chain-weighted (2005 dollars) real domestic employment requirements tables.”

TABLE IX-37—EMPLOYMENT EFFECTS DUE TO INCREASED COSTS OF VEHICLES AND PARTS (SUBSTITUTION EFFECT), IN JOB-YEARS—Continued

Year	Costs (millions of 2012\$)	Minimum employment due to substitution effect (ERM estimates, expenditures in the Parts Sector <sup>a</sup> )	Maximum employment due to substitution effect (ERM estimates, expenditures in the Body and Trailer Mfg Sector)
2020 .....	112	0	100
2021 .....	2,173	300	2,300
2022 .....	2,161	300	2,200
2023 .....	2,224	200	2,100
2024 .....	3,455	300	3,200
2025 .....	3,647	200	3,200
2026 .....	3,736	200	3,100
2027 .....	5,309	200	4,200

**Note:**

<sup>a</sup>For 2018 and 2019, the minimum employment effects are associated with the ASM's Light Truck and Utility Vehicle Manufacturing sector.

**(c) Summary of Employment Effects in the Motor Vehicle Sector**

The overall effect of these proposed rules on motor vehicle sector employment depends on the relative magnitude of the output effect and the substitution effect. Because we do not have quantitative estimates of the output effect, and only a partial estimate of the substitution effect, we cannot reach a quantitative estimate of the overall employment effects of these proposed rules on motor vehicle sector employment or even whether the total effect will be positive or negative.

The proposed standards are not expected to provide incentives for manufacturers to shift employment between domestic and foreign production. This is because the proposed standards will apply to vehicles sold in the U.S. regardless of where they are produced. If foreign manufacturers already have increased expertise in satisfying the requirements of the standards, there may be some initial incentive for foreign production, but the opportunity for domestic manufacturers to sell in other markets might increase. To the extent that the requirements of these proposed rules might lead to installation and use of technologies that other countries may seek now or in the future, developing this capacity for domestic production now may provide some additional ability to serve those markets.

**(3) Employment Impacts in Other Affected Sectors****(a) Transport and Shipping Sectors**

Although not directly regulated by these proposed rules, employment effects in the transport and shipping sector are likely to result from these regulations. If the overall cost of shipping a ton of freight decreases

because of increased fuel efficiency (taking into account the increase in upfront purchasing costs), in a perfectly competitive industry some of these costs savings, depending on the relative elasticities of supply and demand, will be passed along to customers. With lower prices, demand for shipping would lead to an increase in demand for truck shipping services (consistent with the VMT rebound effect analysis) and therefore an increase in employment in the truck shipping sector. In addition, if the relative cost of shipping freight via trucks becomes cheaper than shipping by other modes (e.g., rail or barge), then employment in the truck transport industry is likely to increase. If the trucking industry is more labor intensive than other modes, we would expect this effect to lead to an overall increase in employment in the transport and shipping sectors.<sup>778 779</sup> Such a shift would, however, be at the expense of employment in the sectors that are losing business to trucking. The first effect—a gain due to lower shipping costs—is likely to lead to a net increase in employment. The second effect, due to mode-shifting, may increase employment in trucking, but decrease employment in other shipping sectors (e.g., rail or barge), with the net effects dependent on the labor-intensity of the sectors and the volumes.

**(b) Fuel Suppliers**

In addition to the effects on the trucking industry and related truck parts

<sup>778</sup> American Transportation Research Institute, “An Analysis of the Operational Costs of Trucking: 2011 Update.” See [http://www.atri-online.org/research/results/Op\\_Costs\\_2011\\_Update\\_one\\_page\\_summary.pdf](http://www.atri-online.org/research/results/Op_Costs_2011_Update_one_page_summary.pdf).

<sup>779</sup> Association of American Railroads, “All Inclusive Index and Rail Adjustment Factor.” June 3, 2011. See <http://www.aar.org/~media/aar/RailCostIndexes/AAR-RCFA-2011-Q3.ashx>.

sector, these proposed rules will result in reductions in fuel use that lower GHG emissions. Fuel saving, principally reductions in liquid fuels such as diesel and gasoline, will affect employment in the fuel suppliers industry sectors, principally the Petroleum Refinery sector.

Section IX. C. of this Preamble provides estimates of the effects of these proposed standards on expected fuel consumption. While reduced fuel consumption represents savings for purchasers of fuel, it also represents a loss in value of output for the petroleum refinery industry, which will result in reduced sectoral employment. Because this sector is material-intensive, the employment effect is not expected to be large.<sup>780</sup>

**(c) Fuel Savings**

As a result of this proposed rulemaking, it is anticipated that trucking firms will experience fuel savings. Fuel savings lower the costs of transportation goods and services. In a competitive market, some of the fuel savings that initially accrue to trucking firms are likely to be passed along as lower transportation costs that, in turn, could result in lower prices for final goods and services. Some of the savings might also be retained by firms for investments or for distributions to firm owners. Again, how much accrues to customers versus firm owners will depend on the relative elasticities of supply and demand. Regardless, the savings will accrue to some segment of consumers: Either owners of trucking firms or the general public, and the

<sup>780</sup> In the 2012 BLS ERM cited above, the Petroleum and Coal Products Manufacturing sector has a ratio of workers per \$1 million of 0.242, lower than all but two of the 181 sectors with non-zero employment per \$1 million.

effect will be increased spending by consumers in other sectors of the economy, creating jobs in a diverse set of sectors, including retail and service industries.

As described in Section IX. C. (2) the value of fuel savings from this proposed rulemaking is projected to be \$15.1 billion (2012\$) in 2027, according to Table IX–6. If all those savings are spent, the fuel savings will stimulate increased employment in the economy through those expenditures. If the fuel savings accrue primarily to firm owners, they may either reinvest the money or take it as profit. Reinvesting the money in firm operations could increase employment directly. If they take the money as profit, to the extent that these owners are wealthier than the general public, they may spend less of the savings, and the resulting employment impacts would be smaller than if the savings went to the public. Thus, while fuel savings are expected to decrease employment in the refinery sector, they are expected to increase employment through increased consumer expenditures.

#### (4) Summary of Employment Impacts

The primary employment effects of these rules are expected to be found throughout several key sectors: Truck and engine manufacturers, the trucking industry, truck parts manufacturing, fuel production, and consumers. These rules initially takes effect in model year 2018, a time period sufficiently far in the future that the unemployment rate at that time is unknowable. In an economy with full employment, the primary employment effect of a rulemaking is likely to be to move employment from one sector to another, rather than to increase or decrease employment. For that reason, we focus our partial quantitative analysis on employment in the regulated sector, to examine the impacts on that sector directly. We discuss the likely direction of other impacts in the regulated sector as well as in other directly related sectors, but we do not quantify those impacts, because they are more difficult to quantify with reasonable accuracy, particularly so far into the future.

For the regulated sector, we have not quantified the output effect. The substitution effect is associated with potential increased employment from none to a few thousand jobs per year between 2018 and 2027, depending on the share of employment impacts in the affected sectors (Motor Vehicle Manufacturing, Motor Vehicle Body and Trailer Manufacturing, and Motor Vehicle Parts Manufacturing). These estimates do not include potential changes, either greater or less, in labor intensity of production. As mentioned above, some of these job gains may occur earlier as auto manufacturers and parts suppliers hire staff to prepare to comply with the standard.

Lower prices for shipping are expected to lead to an increase in demand for truck shipping services and, therefore, an increase in employment in that sector, though this effect may be offset somewhat by changes in employment in other shipping sectors. Reduced fuel production implies less employment in the fuel provision sectors. Finally, any net cost savings would be expected to be passed along to some segment of consumers: Either the general public or the owners of trucking firms, who are expected then to increase employment through their expenditures. Under conditions of full employment, any changes in employment levels in the regulated sector due to this program are mostly expected to be offset by changes in employment in other sectors.

#### *M. Cost of Ownership and Payback Analysis*

This section examines the economic impacts of the Phase 2 proposed standards from the perspective of buyers, operators, and subsequent owners of new HD vehicles, first in the aggregate and then at the level of individual purchasers of different types of vehicles. In each case, the analysis assumes that HD vehicle manufacturers are able to recover their costs for improving fuel efficiency—including direct technology outlays, indirect costs, and normal profits on any additional capital investments—by charging higher prices to HD vehicle buyers. As summarized below, HDV buyers in the

aggregate would experience substantial savings in fuel costs that would more than offset higher initial outlays to buy more fuel-efficient new vehicles.

Table IX–38 reports aggregate benefits and costs to buyers and operators of new HD vehicles for the Preferred Alternative using Method A. The table reports economic impacts on buyers using only the 7 percent discount rate, since that rate is intended to represent the opportunity cost of capital that HD vehicle buyers and users must divert from other investment opportunities to purchase more costly vehicles. As it shows, fuel savings and the other benefits from increased fuel efficiency—savings from less frequent refueling and benefits from additional truck use—far outweigh the higher costs to buyers of new HD vehicles. As a consequence, buyers, operators, and subsequent owners of HD vehicles subject to the Phase 2 standards are together projected to experience large economic gains under the Preferred Alternative. It should be noted that, because the original buyers may not hold the vehicles for their lifetimes, and because those who own or operate the vehicles may not pay for the fuel, these benefits and costs do not necessarily represent benefits and costs to identifiable individuals.

As Table IX–38 shows, the agencies have estimated the increased costs for maintenance of the new technologies that HD vehicle manufacturers would employ to decrease fuel consumption, and these costs are included together with those for purchasing more fuel-efficient vehicles. Manufacturers' efforts to comply with the Phase 2 standards could also result in changes to vehicle performance and capacity for certain vehicles. For example, reducing the mass of HD vehicles in order to improve fuel efficiency could be used to improve their load-carrying capabilities, while some engine technologies and aerodynamic modifications could reduce payload capacity. The agencies request comment on possible changes to vehicle performance and load-carrying capacity as a result of the proposal along with supporting information.

**TABLE IX–38—MY 2018–2029 LIFETIME AGGREGATE IMPACTS OF THE PREFERRED ALTERNATIVE ON ALL HD VEHICLE BUYERS AND OPERATORS USING METHOD A**

[Billions of 2012\$, Discounted at 7%]<sup>a</sup>

	Baseline 1a	Baseline 1b
Vehicle costs .....	17.1	16.8
Maintenance costs .....	0.6	0.6
Total costs to HD vehicle buyers .....	17.7	17.4

TABLE IX–38—MY 2018–2029 LIFETIME AGGREGATE IMPACTS OF THE PREFERRED ALTERNATIVE ON ALL HD VEHICLE BUYERS AND OPERATORS USING METHOD A—Continued

[Billions of 2012\$, Discounted at 7%]<sup>a</sup>

	Baseline 1a	Baseline 1b
Fuel savings <sup>b</sup> .....		
(valued at retail prices) .....	104.6	99.1
Refueling benefits .....	1.6	1.5
Increased travel benefits .....	8.4	8.2
Total benefits to HD vehicle buyers/operators .....	114.7	108.9
Net benefits to HD vehicle buyers/operators <sup>c</sup> .....	97.0	91.5

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Fuel savings includes fuel consumed during additional rebound driving.

<sup>c</sup>Net benefits shown do not include benefits associated with carbon or other co-pollutant emission reductions, accidents/congestion/noise impacts, energy security, etc.

Table IX–38 shows aggregate benefits and costs to buyers and operators of new HD vehicles for the Preferred Alternative using Method B, again for only the 7 percent discount rate. As it shows, fuel savings and the other

benefits outweigh the higher prices and added maintenance costs that buyers and operators of new HD vehicles pay, so they are again expected to experience large economic gains from the Preferred Alternative. Again, because the original

buyers may not hold the vehicles for their lifetimes, and because those who own or operate the vehicles may not pay for the fuel, these benefits and costs do not necessarily represent benefits and costs to identifiable individuals.

TABLE IX–39 MY 2018–2029 LIFETIME AGGREGATE IMPACTS OF THE PREFERRED ALTERNATIVE ON ALL HD VEHICLE BUYERS AND OPERATORS USING METHOD B

[Billions of 2012\$, Discounted at 7%]<sup>a</sup>

	Baseline 1b
Vehicle costs .....	16.6
Maintenance costs .....	0.6
Total costs to HD vehicle buyers .....	17.2
Fuel savings <sup>b</sup> (valued at retail prices) .....	100.1
Refueling benefits .....	1.6
Increased travel benefits .....	8.2
Total benefits to HD vehicle buyers/operators .....	109.9
Net benefits to HD vehicle buyers/operators <sup>c</sup> .....	92.7

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Fuel savings includes fuel consumed during additional rebound driving.

<sup>c</sup>Net benefits shown do not include benefits associated with carbon or other co-pollutant emission reductions, accidents/congestion/noise impacts, energy security, etc.

It is also useful to examine the cost of purchasing and owning a new vehicle that complies with the Phase 2 standards and its payback period—the point at which cumulative savings from lower fuel expenditures outpace increased vehicle costs. For example, a new MY2027 tractor is estimated to cost roughly \$11,684 more (on average, or roughly 12 percent of a typical \$100,000 reference case tractor) due to the addition of new GHG reducing/fuel consumption improving technology. This new technology would result in lower fuel consumption and, therefore, reduced fuel expenditures. But how many months or years would pass before the reduced fuel expenditures

would surpass the increased upfront costs?

Table IX–40 presents the discounted annual increased vehicle costs and fuel savings associated with owning a new MY2027 HD pickup or van using both 3 percent and 7 percent discount rates. Table IX–41 and Table IX–42 show the same information for a MY2027 vocational vehicle and a tractor/trailer, respectively. These comparisons include sales taxes, excise taxes (for vocational and tractor/trailer) and increased insurance expenditures on the higher value vehicles, as well as maintenance costs associated with replacement of lower rolling resistance tires throughout the lifetimes of affected vehicles. Importantly, the values behind

the tables in this payback analysis do not include rebound miles driven and/or rebound gallons consumed. Instead, the tables use reference case miles driven combined with policy case fuel consumption. We detail these input metrics in Chapter 7 of the draft RIA.

The fuel expenditure column uses retail fuel prices specific to gasoline and diesel fuel as projected in AEO2014.<sup>781</sup> This payback analysis does not include other impacts, such as reduced refueling events, the value of driving potential rebound miles, or noise, congestion and accidents. We use retail fuel prices and

<sup>781</sup> U.S. Energy Information Administration, Annual Energy Outlook 2014, Early Release; Report Number DOE/EIA–0383ER(2014), December 16, 2013.

exclude these other private and social impacts because the analysis is intended to focus on those factors that are most important to buyers when considering a new vehicle purchase, and to include only those factors that have clear dollar impacts on HD vehicle buyers.

As shown, payback would occur in the 3rd year of ownership for HD pickups and vans (the first year where cumulative net costs turn negative), in the 5th year for vocational vehicles (at a 3 percent discount rate, 6th year at a 7 percent discount rate) and early in the

2nd year for tractor/trailers. Note that each table reflects the average vehicle and reflects proper weighting of fuel consumption/costs (gasoline vs. diesel). We request comment and supporting data on all aspects of our payback analysis.

**TABLE IX-40—DISCOUNTED ANNUAL INCREMENTAL EXPENDITURES FOR A MY 2027 HD PICKUP OR VAN USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**  
[2012\$]<sup>a</sup>

Age in years	3% Discount rate				7% Discount rate			
	Vehicle <sup>b</sup>	Maint <sup>c</sup>	Fuel <sup>d</sup>	Cumulative Net	Vehicle <sup>b</sup>	Maint <sup>c</sup>	Fuel <sup>d</sup>	Cumulative net
1 .....	\$1,587	\$4	– \$759	\$832	\$1,558	\$3	– \$745	\$817
2 .....	25	3	– 734	126	23	3	– 694	150
3 .....	23	3	– 714	– 561	21	3	– 649	– 476
4 .....	22	3	– 693	– 1,229	19	3	– 606	– 1,060
5 .....	20	3	– 651	– 1,857	17	2	– 549	– 1,590
6 .....	19	3	– 611	– 2,446	15	2	– 496	– 2,067
7 .....	18	2	– 571	– 2,997	14	2	– 446	– 2,497
8 .....	16	2	– 536	– 3,514	12	2	– 403	– 2,886

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Includes new technology costs, insurance costs and sales taxes.

<sup>c</sup>Maintenance costs.

<sup>d</sup>Uses AEO2014 retail fuel prices.

**TABLE IX-41—DISCOUNTED ANNUAL INCREMENTAL EXPENDITURES FOR A MY 2027 VOCATIONAL VEHICLE USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**  
[2012\$]<sup>a</sup>

Age in years	3% Discount rate				7% Discount rate			
	Vehicle <sup>b</sup>	Maint <sup>c</sup>	Fuel <sup>d</sup>	Cumulative Net	Vehicle <sup>b</sup>	Maint <sup>c</sup>	Fuel <sup>d</sup>	Cumulative net
1 .....	\$3,998	\$10	– \$965	\$3,043	\$3,924	\$10	– \$947	\$2,987
2 .....	63	9	– 937	2,178	59	9	– 885	2,169
3 .....	59	9	– 914	1,331	53	8	– 832	1,399
4 .....	55	9	– 891	504	48	8	– 780	675
5 .....	51	8	– 829	– 265	43	7	– 699	27
6 .....	48	7	– 771	– 981	39	6	– 625	– 554
7 .....	45	7	– 716	– 1,645	35	5	– 559	– 1,073
8 .....	42	6	– 667	– 2,264	31	5	– 501	– 1,538

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Includes new technology costs, insurance costs, excise and sales taxes.

<sup>c</sup>Maintenance costs.

<sup>d</sup>Uses AEO2014 retail fuel prices.

**TABLE IX-42—DISCOUNTED ANNUAL INCREMENTAL EXPENDITURES FOR A MY 2027 TRACTOR/TRAILER USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE**  
[2012\$]<sup>a</sup>

Age in years	3% Discount rate				7% Discount rate			
	Vehicle <sup>b</sup>	Maint <sup>c</sup>	Fuel <sup>d</sup>	Cumulative Net	Vehicle <sup>b</sup>	Maint <sup>c</sup>	Fuel <sup>d</sup>	Cumulative Net
1 .....	\$15,194	\$48	– \$14,649	\$593	\$14,914	\$47	– \$14,379	\$582
2 .....	238	46	– 14,204	– 13,327	225	43	– 13,421	– 12,571
3 .....	223	44	– 13,809	– 26,869	203	40	– 12,561	– 24,889
4 .....	209	42	– 13,416	– 40,034	183	37	– 11,746	– 36,415
5 .....	195	39	– 12,391	– 52,191	164	33	– 10,443	– 46,661
6 .....	182	35	– 11,411	– 63,385	148	29	– 9,258	– 55,743
7 .....	170	32	– 10,511	– 73,694	133	25	– 8,209	– 63,794

TABLE IX-42—DISCOUNTED ANNUAL INCREMENTAL EXPENDITURES FOR A MY 2027 TRACTOR/TRAILER USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE—Continued  
[2012\$]<sup>a</sup>

Age in years	3% Discount rate				7% Discount rate			
	Vehicle <sup>b</sup>	Maint <sup>c</sup>	Fuel <sup>d</sup>	Cumulative Net	Vehicle <sup>b</sup>	Maint <sup>c</sup>	Fuel <sup>d</sup>	Cumulative Net
8 .....	158	29	– 9,704	– 83,211	119	22	– 7,295	– 70,949

**Notes:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

<sup>b</sup>Includes new technology costs, insurance costs, excise and sales taxes.

<sup>c</sup>Maintenance costs.

<sup>d</sup>Uses AEO2014 retail fuel prices.

### N. Safety Impacts

#### (1) Summary of Supporting HD Vehicle Safety Research

NHTSA and EPA considered the potential safety impact of technologies that improve HD vehicle fuel efficiency and GHG emissions as part of the assessment of regulatory alternatives. The safety assessment of the technologies in this proposal was informed by two NAS reports, an analysis of safety effects of HD pickups and vans using estimates from the DOT report on the effect of mass reduction and vehicle size on safety, and agency-sponsored safety testing and research. A summary of the literature and work considered by the agencies follows.

#### (2) National Academy of Sciences HD Phase 1 and Phase 2 Reports

As required by EISA, the National Research Council has conducted two studies of the technologies and approaches for reducing the fuel consumption of medium- and heavy-duty vehicles. The first was documented in a report issued in 2010, “Technologies and Approaches to Reducing the Fuel Consumption of Medium- and Heavy-Duty Vehicles” (“NAS Report”). The second was documented in a report issued in 2014, “Reducing the Fuel Consumption and Greenhouse Gas Emissions of Medium- and Heavy-Duty Vehicles, Phase Two-First Report” (“NAS HD Phase 2 First Report”). While the reports primarily focused on reducing vehicle fuel consumption and emissions through technology application, and examined potential regulatory frameworks, both reports additionally contain findings and recommendations on safety. In developing this proposal, the agencies carefully considered both of the reports’ findings related to safety. Some of the reports’ key findings related to safety follow.

NAS commented that idle reduction strategies in actual can be sophisticated

to provide for the safety of the driver in hot and cold weather.<sup>782</sup> The agencies considered this comment in our approach for idle reduction technologies and allow override provisions, as discussed in Section III. Override is allowed if the external ambient temperature reaches a level below which or above which the cabin temperature cannot be maintained within reasonable heat or cold exposure threshold limit values for the health and safety of the operator (not merely comfort). NAS commented extensively on the recent emergence of natural gas (NG) as a viable technology option for commercial vehicles, but alluded to the existence of uncertainties regarding its safety. The committee found that while the public crash databases do not contain information on vehicle fuel type, the existing information indicates that the crash-related safety risk for NG storage on vehicles does not appear to be appreciably different from diesel fuel risks. The committee also found that while there are two existing SAE-recommended practice standards for NG-powered HD vehicles, the industry could benefit from best practice directives to minimize crash risks for NG fuel tanks, such as on shielding to prevent punctures during crashes. As a final point, NAS stated that manufacturers and operators have a great incentive to prevent possible NG leakage from a vehicle fuel system because it would be a significant safety concern and reduce vehicle range. No recommendations were made for additional Federal safety regulations for these vehicles. In response, the agencies have reviewed and discuss the existing NG vehicle standards and best practices cited by NAS in Section XI.

In the NAS Committee’s Phase 1 report, the Committee commented that aerodynamic fairings detaching from trucks on the road was a potential safety issue. However, the Phase 2 interim

report stated that “Anecdotal information gained during the observations of on-road trailers indicates a few skirts badly damaged or missing from one side. The skirt manufacturers report no safety concerns (such as side skirts falling off) and little maintenance needed.”

The NAS report also identified the link between tire inflation and condition and vehicle stopping distance and handling, which impacts overall safety. The committee found that tire pressure monitoring systems and automatic tire inflation systems are being adopted by fleets at an increasing rate. However, the committee noted that there are no standards for performance, display, and system validation. The committee recommended that NHTSA issue a white paper on the minimum performance of tire pressure systems from a safety perspective.

The agencies considered the safety findings in both NAS reports in developing this proposal and conducted additional research on safety to further examine information and findings of the reports.

#### (3) DOT CAFE Model HD Pickup and Van Safety Analysis

This analysis considered the potential effects on crash safety of the technologies manufacturers may apply to their HD pickups and vans to meet each of the regulatory alternatives evaluated. NHTSA research has shown that vehicle mass reduction affects overall societal fatalities associated with crashes and, most relevant to this proposal, that mass reduction in heavier light- and medium-duty vehicles has an overall beneficial effect on societal fatalities. Reducing the mass of a heavier vehicle involved in a crash with another vehicle(s) makes it less likely that there will be fatalities among the occupants of the other vehicles. In addition to the effects of mass reduction, the analysis anticipates that the proposed standards, by reducing the

<sup>782</sup> *Id.*, p. 33.

cost of driving HD pickups and vans, would lead to increased travel by these vehicles and, therefore, more crashes involving these vehicles. The Method A analysis considers overall impacts from both of these factors, using a methodology similar to NHTSA's analyses for the MYs 2017–2025 CAFE and GHG emission standards.

The Method A analysis includes estimates of the extent to which HD pickups and vans produced during MYs 2014–2030 may be involved in fatal crashes, considering the mass, survival, and mileage accumulation of these vehicles, taking into account changes in mass and mileage accumulation under each regulatory alternative. These calculations make use of the same coefficients applied to light trucks in the MYs 2017–2025 CAFE rulemaking analysis. As discussed above, vehicle miles traveled may increase due to the fuel economy rebound effect, resulting from improvements in vehicle fuel efficiency and cost of fuel, as well as the assumed future growth in average vehicle use. Increases in total lifetime mileage increase exposure to vehicle crashes, including those that result in fatalities. Consequently, the modeling system computes total fatalities attributed to vehicle use for vehicles of a given model year based on safety class and weight threshold. These calculations also include a term that accounts for the fact that vehicles involved in future crashes will be certified to more stringent safety standards than those involved with past crashes upon which the base rates of involvement in fatal crashes were estimated. Since the use of mass reducing technology is present within the model, safety impacts may also be observed whenever a vehicle's base weight decreases. Thus, in addition to computing total fatalities related to vehicle use, the modeling system also estimates changes in fatalities due to reduction in a vehicle's curb weight.

The total fatalities attributed to vehicle use and vehicle weight change for vehicles of a given model year are then summed. Lastly, total fatalities occurring within the industry in a given model year are accumulated across all vehicles. In addition to using inputs to estimate the future involvement of modeled vehicles in crashes involving fatalities, the model also applies inputs defining other accident-related externalities estimated on a dollar per mile basis. For vehicles above 4,594 lbs—i.e., the majority of the HD pickup and van fleet—mass reduction is estimated to reduce the net incidence of highway fatalities by 0.34 percent per 100 lbs of removed curb weight. For the

few HD pickups and vans below 4,594 lbs, mass reduction is estimated to increase the net incidence of highway fatalities by 0.52 percent per 100 lbs. Because there are many more HD pickups and vans above 4,594 lbs than below 4,594 lbs, the overall effect of mass reduction in the segment is estimated to reduce the incidence of highway fatalities. The estimated increase in vehicle miles traveled due to the fuel economy rebound effect is estimated to increase exposure to vehicle crashes and offset these reductions.

#### (4) Volpe Research on MD/HD Fuel Efficiency Technologies

The 2010 National Research Council report “Technologies and Approaches to Reducing the Fuel Consumption of Medium- and Heavy-Duty Vehicles” recommended that NHTSA perform a thorough safety analysis to identify and evaluate potential safety issues with fuel efficiency-improving technologies. The Department of Transportation Volpe Center's 2015 report titled “Review and Analysis of Potential Safety Impacts and Regulatory Barriers to Fuel Efficiency Technologies and Alternative Fuels in Medium- and Heavy-Duty Vehicles” summarizes research and analysis findings on potential safety issues associated with both the diverse alternative fuels (natural gas-CNG and LNG, propane, biodiesel, and power train electrification), and the specific FE technologies recently adopted by the MD/HDV fleets.<sup>783</sup> These include Intelligent Transportation Systems (ITS) and telematics, speed limiters, idle reduction devices, tire technologies (single-wide tires, and tire pressure monitoring systems-TPMS and Automated Tire Inflation Systems-ATIS), aerodynamic components, vehicle light-weighting materials, and Long Combination Vehicles (LCVs).

Chapter 1 provides an overview of the study's rationale, background, and key objective, namely, to identify the technical and operational/behavioral safety benefits and disbenefits of MD/HDVs equipped with FE technologies and using emerging alternative fuels (AFs). Recent MD/HDV national fleet crash safety statistical averages are also provided for context, although no information exists in crash reports relating to specific vehicle FE technologies and fuels. (NHTSA/FARS

<sup>783</sup> Brecher, A., Epstein, A.K., & Breck, A. (2015, June). *Review and analysis of potential safety impacts of and regulatory barriers to fuel efficiency technologies and alternative fuels in medium- and heavy-duty vehicles*. (Report No. DOT HS 812 159). Washington, DC: National Highway Traffic Safety Administration.

and FMCSA/CSA databases do not include detailed information on vehicle fuel economy technologies, since the state crash report forms are not coded down to an individual fuel economy technology level).

Chapters 2 and 3 are organized by clusters of functionally-related FE technologies for vehicles and trailers (e.g., tire systems, ITS, light-weighting materials, and aerodynamic systems) and alternative fuels, which are described and their respective associated potential safety issues are discussed. Chapter 2 summarizes the findings from a comprehensive review of available technical and trade literature and Internet sources regarding the benefits, potential safety hazards, and the applicable safety regulations and standards for deployed FE technologies and alternative fuels. Chapter 2 safety-relevant fuel-specific findings include:

- Both CNG- and LNG-powered vehicles present potential hazards, and call for well-known engineering and process controls to assure safe operability and crashworthiness. However, based on the reported incident rates of NGVs and the experiences of adopting fleets, it appears that NGVs can be operated at least as safely as diesel MD/HDVs.

- There are no safety contraindications to the large scale fleet adoption of CNG or LNG fueled heavy duty trucks and buses, and there is ample experience with the safe operation of large public transit fleets. Voluntary industry standards and best practices suffice for safety assurance, though improved training of CMV operators and maintenance staff in natural gas safety of equipment and operating procedures is needed.

- Observing CNG and LNG fuel system and maintenance facility standards, coupled with sound design, manufacture, and inspection of natural gas storage tanks will further reduce the potential for leaks, tank ruptures, fires, and explosions.

- Biodiesel blends used as drop-in fuels have presented some operational safety concerns dependent on blending fraction, such as material compatibility, bio-fouling sludge accumulation, or cold-weather gelling. However, best practices for biodiesel storage, and improved gaskets and seals that are biodiesel resistant, combined with regular maintenance and leak inspection schedules for the fuel lines and components enable the safe use of biodiesel in newer MD/HDVs.

- Propane (LPG, or autogas) presents well-known hazards including ignition (due to leaks or crash) that are

preventable by using Overfill Prevention Devices (OPDs), which supplement the automatic stop-fill system on the fueling station side, and pressure release devices (PRDs). Established best practices and safety codes (e.g., NFPA) have proven that propane fueled MD/HDVs can be as operationally safe as the conventionally-fueled counterparts.

- As the market penetration of hybrid and electric drivetrain accelerates, and as the capacity and reliability of lithium ion batteries used in Rechargeable Energy Storage Systems (RESS) improve, associated potential safety hazards (e.g., electrocution from stranded energy, thermal runaway leading to battery fire) have become well understood, preventable, and manageable. Existing and emerging industry technical and safety voluntary standards, applicable NHTSA regulations and guidance, and the growing experience with the operation of hybrid and electric MD/HDVs will enable the safe operation and large-scale adoption of safer and more efficient power-train electrification technologies.

The safety findings from literature review pertaining to the specific FE technologies implemented to date in the MD/HDV fleet include:

- Telematics—integrating on-board sensors, video, and audio alerts for MD/HDV drivers—offer potential improvements in both driver safety performance and fuel efficiency. Both camera and non-camera based telematics setups are currently integrated with available crash avoidance systems (such as ESC, RSC, LDWS, etc.) and appear to be well accepted by MD/HDV fleet drivers.

- Both experience abroad and the cited US studies of trucks equipped with active speed limiters indicated a safety benefit, as measured by up to 50 percent reduced crash rates, in addition to fuel savings and other benefits, with good CMV driver acceptance. Any negative aspects were small and avoidable if all the speed limitation devices were set to the same speed, so there would be less need for overtaking at highway speeds.

- No literature reports of adverse safety impacts were found regarding implementation of on-board idle-reduction technologies in MD/HDVs (such as automatic start-stop, direct-fired heaters, and APUs).

- There was no clear consensus from the literature regarding the relative crash rates and highway safety impacts of LCVs, due to lack of sufficient data and controls and inconsistent study methodologies. Recent safety evaluations of LCVs and ongoing MAP-

21 mandated studies will clarify and quantify this issue.

- Tire technologies for FE (including ATIS, TPMS, LRR and single-wide tires) literature raised potential safety concerns regarding lower stability or loss of control, e.g., when tire pressure is uneven or a single wide tire blows out on the highway. However, systems such as automated tire monitoring systems and stability enhancing electronic systems (ABS, ESC, RSC) may compensate and mitigate any adverse safety impacts.

- Aerodynamic technologies that offer significant fuel savings have raised potential concerns about vehicle damage or injury in case of detached fairings or skirts, although there were no documented incidents of this type in the literature.

- Some light weighting materials may pose some fire safety and crashworthiness hazards, depending on their performance in structural or other vehicle subsystem applications (chassis, power-train, crash box or safety cage). Some composites (fiberglass, plastics, CFRP, foams) may become brittle on impact or due to weathering from UV exposure or extreme cold. Industry has developed advanced, high performance lightweight material options tailored to their automotive applications, e.g., thermoplastics resistant to UV and weathering. No examples of such lightweight material failures on MD/HDVs were identified in the literature.

Chapter 3 provides complementary inputs on the potential safety issues associated with FE technologies and alternative fuels obtained from Subject Matter Experts (SMEs). The broad cross-section of SMEs consulted had experience with the operation of “green” truck and bus fleets, were Federal program managers, or were industry developers of FE systems for MD/HDVs. Safety concerns raised by the SMEs can be prevented or mitigated by complying with applicable regulations and safety standards and best practices, and are being addressed by evolving technologies, such as electronic collision prevention devices. Although SMEs raised some safety concerns, their experience indicates that system- or fuel-specific hazards can be prevented or mitigated by observing applicable industry standards, and by training managers, operators and maintenance staff in safety best practices. Specific safety concerns raised by SMEs based on their experience included:

- Alternative fuels did not raise major safety concerns, but generally required better education and training of staff and operators. There was a concern expressed regarding high pressure (4000

psi) CNG cylinders that could potentially explode in a crash scenario or if otherwise ruptured. However, aging CNG fuel tank safety can be assured by enforcing regulations such as FMVSS No. 304, and by periodic inspection and end-of-life disposal and replacement. A propane truck fleet manager stated that the fuel was as safe as or safer than gasoline, and reported no safety issues with the company’s propane, nor with hybrid gasoline-electric trucks. OEMs of drivetrain hybridization and electrification systems, including advanced Lithium Ion batteries for RESS, indicated that they undergo multiple safety tests and are designed with fail-safes for various misuse and abuse scenarios. Integration of hybrid components downstream by bodybuilders in retrofits, as opposed to new vehicles, was deemed a potential safety risk. Another potential safety concern raised was the uncertain battery lifetime due to variability of climate, duty-cycles, and aging. Without state-of-charge indicators, this could conceivably leave vehicles underpowered or stranded if the battery degrades and is not serviced or replaced in a timely manner.

- ITS and telematics raised no safety concerns; on the contrary, fleet managers stated that “efficient drivers are safer drivers.” Monitoring and recording of driver behavior, combined with coaching, appeared to reduce distracted and aggressive driving and provided significant FE and safety benefits.

- A wide-base single tire safety concern was the decrease in tire redundancy in case of a tire blowout at highway speeds. For LRRs, a concern was that they could negatively affect truck stopping distance and stability control.

- A speed-limiter safety concern was related to scenarios when such trucks pass other vehicles on the highway instead of staying in the right-hand lane behind other vehicles. By combining speed limiters with driver training programs, overall truck safety could actually improve, as shown by international practice.

- Aerodynamic systems’ safety performance to date was satisfactory, with no instances of on-road detaching. However, covering underside or other components with aerodynamic fairings can make them harder to inspect, such as worn lugs, CNG relief valve shrouds, wheel covers, and certain fairings. Drivers and inspectors need to be able to see through wheel covers and to be able to access lug nuts through them. These covers must also be durable to withstand frequent road abuse.



- For lightweighting materials, the safety concern raised was lower crashworthiness (debonding or brittle fracture on impact) and the potential for decreased survivability in vehicle fires depending on the specific material choice and its application.

The key finding from the literature review and SME interviews is that there appear to be no major safety hazards preventing the adoption of FE technologies, or the increased use of alternative fuels and vehicle electrification. In view of the scarcity of hard data currently available on actual highway crashes that can be directly or causally attributed to adoption of FE technologies and/or alternative fuels by MD/HDVs, and the limited experience with commercial truck and transit bus fleets operations equipped with these technologies, it was not possible to perform a quantitative, probabilistic risk assessment, or even a semi-quantitative preliminary hazard analysis (PHA). Chapter 4 employs a deterministic scenario-based hazard analysis of potential crash or other safety concerns identified from the literature review or raised by subject matter experts (SMEs) interviewed (e.g., interfaces with charging or refueling infrastructure). For each specific hazard scenario discussed, the recommended prevention or mitigation options, including compliance with applicable NHTSA or FMCSA regulations, and voluntary industry standards and best practices are identified, along with FE technology or fuel-specific operator training. SMEs safety concerns identified in Sec 3.3 were complemented with actual incidents, and developed into the hazard scenarios analyzed in Chapter 4.

The scenario-based deterministic hazard analysis reflected not only the literature findings and SMEs' safety concerns, but also real truck or bus mishaps that have occurred in the past. Key hazard analysis scenarios included: CNG-fueled truck and bus vehicle fires or explosions due to tank rupture, when pressurized fuel tanks were degraded due to aging or when PRDs failed; LNG truck crashes leading to fires, or LNG refueling-related mishaps; the flammability or brittle fracture issues related to lightweighting materials in crashes; reduced safety performance for either LRR or wide-base tires; highway pile-ups when LCVs attempt to pass at highway speeds; aerodynamic components detaching while the vehicle traveled on a busy highway or urban roadway; and fires resulting in overheated lithium ion batteries in electric or hybrid buses. These hypothetical worst case scenarios appear to be preventable or able to be

mitigated by observing safety regulations and voluntary standards, or with engineering and operational best practices.

Chapter 5 reviews and discusses the existing federal and state regulatory framework for safely operating MD/HDVs equipped with FE technologies or powered by alternative fuels. The review identifies potential regulatory barriers to their large-scale deployment in the national fleet that could delay achievement of desired fuel consumption and environmental benefits, while ensuring equal or better safety performance.

Chapter 6 summarizes the major findings and recommendations of this preliminary safety analysis of fuel efficiency technologies and alternative fuels adopted by MD/HDVs. The scenario-based hazard analysis, based on the literature review and experts' inputs, indicates that MD/HDVs equipped with advanced FE technologies and/or using alternative fuels have manageable potentially adverse safety impacts. The findings suggest that the potential safety hazards identified during operation, maintenance, and crash scenarios can be prevented or mitigated by complying with safety regulations and voluntary standards and industry best practices. The study also did not identify any major regulatory barriers to rapid adoption of FE technologies and alternative fuels by the MD/HDV fleet.

#### (5) Oak Ridge National Laboratory (ORNL) Research on Low Rolling Resistance Truck Tires

DOT's Federal Motor Carrier Safety Administration and NHTSA sponsored a test program conducted by Oak Ridge National Laboratory to explore the effects of tire rolling resistance levels on Class 8 tractor-trailer stopping distance performance over a range of loading and surface conditions. The objective was to determine whether there is a relationship between tire rolling resistance and stopping distance for vehicles of this type. The overall results of this research suggest that tire rolling resistance is not a reliable indicator of Class 8 tractor-trailer stopping distance. The correlation coefficients (R<sup>2</sup> values) for linear regressions of wet and dry stopping distance versus overall vehicle rolling resistance values did not meet the minimum threshold for statistical significance for any of the test conditions. Correlation between CRR and stopping distance was found to be negligible for the dry tests for both loading conditions. While correlation was higher for the wet testing (showing a slight trend in which lower CRRs

correspond to longer stopping distances), it still did not meet the minimum threshold for statistical significance. In terms of compliance with Federal safety standards, it was found that the stopping distance performance of the vehicle with the four tire sets studied in this research (with estimated tractor CRRs which varied by 33 percent), were well under the FMVSS No. 121 stopping distance requirements.

#### (6) Additional Safety Considerations

The agencies' considered the Organic Rankine Cycle waste heat recovery (WHR) as a fuel saving technology in the rulemaking timeframe. The basic approach of these systems is to use engine waste heat from multiple sources to evaporate a working fluid through a heat exchanger, which is then passed through a turbine or equivalent expander to create mechanical or electrical power. The working fluid is then condensed as it passes through a heat exchanger and returns to back to the fluid tank, and pulled back to the flow circuit through a pump to continue the cycle. Despite the promising performance of pre-prototype WHR systems, manufacturers have not yet arrived at a consensus on which working fluid(s) to be used in WHR systems to balance concerns regarding performance, global warming potential (GWP), and safety. Current working fluids have a high GWP (conventional refrigerant), are expensive (low GWP refrigerant), are hazardous (ammonia, etc.), are flammable (ethanol/methanol), or can freeze (water). One of the challenges is determining how to seal the working fluid properly under the vacuum condition with high temperature to avoid safety issues for flammable/hazardous working fluids. Because of these challenges, choosing a working fluid will be an important factor for system safety, efficiency, and overall production viability. The agencies believe manufacturers will require additional time and development effort to assure that a working fluid that is both appropriate, given the noted challenges, and has a low GWP for use in waste heat recovery systems. Based on this and other factors, the analysis for the Preferred Alternative assumes that WHR would not achieve a significant market penetration for diesel tractor engines (*i.e.*, greater than 5 percent) until 2027, which would provide time for these considerations to be addressed. The agencies assume no use of this technology in the HD pickups and vans and vocational vehicle segments.

## (7) The Agencies' Assessment of Potential Safety Impacts

NHTSA and EPA considered the potential safety impact of technologies that improve HD vehicle fuel efficiency and GHG emissions as part of the assessment of regulatory alternatives. The safety assessment of the technologies in this proposal was informed by two NAS reports, an analysis of safety effects of HD pickups and vans using estimates from the DOT report on the effect of mass reduction and vehicle size on safety, and agency-sponsored safety testing and research. The agencies considered safety from the perspective of both direct effects and indirect effects.

In terms of direct effects on vehicle safety, research from NAS and Volpe, and direct testing of technologies like the ORNL tire work, indicate that there are no major safety hazards associated with the adoption of technologies that improve HD vehicle fuel efficiency and GHG emissions or the increased use of alternative fuels and vehicle electrification. The findings suggest that the potential safety hazards identified during operation, maintenance, and crash scenarios can be prevented or mitigated by complying with safety regulations and voluntary standards and industry best practices. Tire testing showed tire rolling resistance did not impact of Class 8 tractor-trailer stopping distance for the tires tested. Also, because the majority of HD pickup and van fleet are above 4,594 lbs, the vehicle mass reduction in HD pickup and vans is estimated to reduce the net incidence of highway fatalities. Taken together, these studies suggest that the fuel efficiency improving technologies assessed in the studies can be implemented with no degradation in overall safety.

However, analysis anticipates that the indirect effect of the proposed standards, by reducing the operating costs, would lead to increased travel by tractor-trailers and HD pickups and vans and, therefore, more crashes involving these vehicles.

## X. Analysis of the Alternatives

As discussed throughout this preamble, in developing this proposal the agencies considered a number of regulatory alternatives that could result in potentially fewer or greater GHG emission and fuel consumption reductions than the program we are proposing. This section summarizes the alternatives we considered and presents estimates of technology costs, CO<sub>2</sub> reductions, fuel savings, and other costs and benefits associated with each

alternative. The agencies request comment on each of these alternatives, as well as other potential levels of stringency and implementation timing. Note that since the impacts of these alternatives differ among the various heavy-duty vehicle categories, commenters are encouraged to address the alternatives separately for each vehicle category.

In developing alternatives, both agencies must consider a range of stringency. NHTSA must consider EISA's requirement for the MD/HD fuel efficiency program. In particular, 49 U.S.C. 32902(k)(2) and (3) contain the following three requirements specific to the MD/HD vehicle fuel efficiency improvement program: (1) The program must be "designed to achieve the maximum feasible improvement"; (2) the various required aspects of the program must be appropriate, cost-effective, and technologically feasible for MD/HD vehicles; and (3) the standards adopted under the program must provide not less than four model years of lead time and three model years of regulatory stability. In considering these various requirements, NHTSA will also account for relevant environmental and safety considerations.

As explained in the Phase 1 rule, NHTSA has broad discretion in balancing the above factors in determining the improvement that the manufacturers can achieve. The fact that the factors may often be conflicting gives NHTSA significant discretion to decide what weight to give each of the competing policies and concerns and then determine how to balance them—as long as NHTSA's balancing does not undermine the fundamental purpose of the EISA: Energy conservation, and as long as that balancing reasonably accommodates "conflicting policies that were committed to the agency's care by the statute."<sup>784</sup>

EPA also has significant discretion in considering a range of stringency. Section 202(a)(2) of the Clean Air Act requires only that the standards "take effect after such period as the Administrator finds necessary to permit the development and application of the requisite technology, giving appropriate consideration to the cost of compliance within such period." This language affords EPA considerable discretion in how to weight the critical statutory factors of emission reductions, cost, and lead time. See 76 FR 57129–57130.

<sup>784</sup> Center for Biological Diversity v. National Highway Traffic Safety Admin., 538 F.3d 1172, 1194 (9th Cir. 2008). For further discussion see 76 FR 57198.

As discussed in this Preamble's Sections II (Engines), III (Tractors), IV (Trailers), V (Vocational Vehicles), And VI (Pickups And Vans), although NHTSA and EPA are proposing Alternative 3 for each vehicle category, we have also closely examined the potential feasibility of Alternative 4 for each category, and specifically direct commenters' attention to the analysis and discussions contained in those sections for both Alternatives 3 and 4. As discussed in those sections, if we reanalyze relevant existing information or receive relevant comments or new information between the proposal and final rule that supports a more accelerated implementation of the proposed standards, the agencies may consider establishing final fuel consumption and GHG standards at the Alternative 4 levels and timing if we deem them to be maximum feasible and reasonable for NHTSA and EPA, respectively. This Section X describes all of the alternatives considered, and provides context for the relative stringency, costs, and benefits associated with Alternatives 3 and 4, as compared to the other alternatives. The agencies seek comment on all of the alternatives, as well as whether we should consider more, fewer or different alternatives for the final rule analysis.

### A. What are the alternatives that the Agencies considered?

The five alternatives below represent a broad range of potential stringency levels, and thus a broad range of associated technologies, costs and benefits for a HD vehicle fuel efficiency and GHG emissions program. All of the alternatives were modeled using the same methodologies described in Chapter 5 of the draft RIA. The alternatives in order of increasing fuel efficiency and GHG emissions reductions are as follows:

#### (1) Alternative 1: No Action (The Baseline for Phase 2)

OMB guidance regarding regulatory analysis indicates that proper evaluation of the benefits and costs of regulations and their alternatives requires agencies to identify a baseline:

*"You need to measure the benefits and costs of a rule against a baseline. This baseline should be the best assessment of the way the world would look absent the proposed action. The choice of an appropriate baseline may require consideration of a wide range of potential factors, including:*

- *Evolution of the market,*
- *changes in external factors affecting expected benefits and costs,*

- *changes in regulations promulgated by the agency or other government entities, and*

- *the degree of compliance by regulated entities with other regulations. It may be reasonable to forecast that the world absent the regulation will resemble the present. If this is the case, however, your baseline should reflect the future effect of current government programs and policies. For review of an existing regulation, a baseline assuming no change in the regulatory program generally provides an appropriate basis for evaluating regulatory alternatives. When more than one baseline is reasonable and the choice of baseline will significantly affect estimated benefits and costs, you should consider measuring benefits and costs against alternative baselines. In doing so you can analyze the effects on benefits and costs of making different assumptions about other agencies' regulations, or the degree of compliance with your own existing rules. In all cases, you must evaluate benefits and costs against the same baseline. You should also discuss the reasonableness of the baselines used in the sensitivity analyses. For each baseline you use, you should identify the key uncertainties in your forecast."*<sup>785</sup>

A no-action alternative is also required as a baseline against which to measure environmental impacts of the proposed standards and alternatives. NHTSA, as required by the National Environmental Policy Act, is documenting these estimated impacts in the draft EIS published with this proposed rule.<sup>786</sup>

As discussed later in this section, the agencies are requesting comment on Alternative 1 in order to ensure an appropriate analytical baseline (also termed 'reference case') for the Phase 2 rulemaking. Alternative 1 is an analytical tool, but, as discussed below,

no new standards beyond Phase 1 is not a potential outcome of the Phase 2 rulemaking, as that outcome would not meet the requirements of either EISA or the CAA.

The No Action Alternative for today's analysis, alternatively referred to as the "baseline" or "reference case," assumes that the agencies would not issue new rules regarding MD/HD fuel efficiency and GHG emissions. That is, this alternative assumes that the Phase 1 MD/HD fuel efficiency and GHG emissions program's model year 2018 standards would be extended indefinitely and without change.

The agencies recognize that there are a number of factors that create uncertainty in projecting a baseline against which to compare the future effects of the proposed action and the remaining alternatives. The composition of the future fleet—such as the relative position of individual manufacturers and the mix of products they each offer—cannot be predicted with certainty at this time. As reflected, in part, by the market forecast underlying the agencies' analysis, we anticipate that the baseline market for medium- and heavy-duty vehicles will continue to evolve within a competitive market that responds to a range of factors. Additionally, the heavy-duty vehicle market is diverse, as is the range of vehicle purchasers.

Heavy-duty vehicle manufacturers have reported that their customers' purchasing decisions are influenced by their customers' own determinations of minimum total cost of ownership, which can be unique to a particular customer's circumstances. For example, some customers (e.g., less-than-truckload or package delivery operators) operate their vehicles within a limited geographic region and typically own their own vehicle maintenance and repair centers within that region. These operators tend to own their vehicles for long time periods, and sometimes for the entire service life of the vehicle. Their total cost of ownership is influenced by their ability to better control their own maintenance costs, and thus they can afford to consider fuel efficiency technologies that have longer payback periods, outside of the vehicle manufacturer's warranty period. Other customers (e.g. truckload or long-haul operators) tend to operate cross-country, and thus must depend upon truck dealer service centers for repair and maintenance. Some of these customers tend to own their vehicles for about four to seven years, so that they typically do not have to pay for repair and maintenance costs outside of either the manufacturer's warranty period or some

other extended warranty period. Many of these customers tend to require seeing evidence of fuel efficiency technology payback periods on the order of 18 to 24 months before seriously *considering* evaluating a new technology for potential adoption within their fleet (NAS 2010, Roeth et al. 2013, Klemick et al. 2014). Purchasing decisions, however, are not based exclusively on payback period, but also include the considerations discussed in this section. For the baseline analysis, the agencies use payback period as a proxy for all of these considerations, and therefore the payback period for the baseline analysis is shorter than the payback period industry uses as a threshold for the further consideration of a technology.

Purchasers of HD pickups and vans wanting better fuel efficiency will demand that fuel consumption improvements pay back within approximately one to three years, but not all purchasers fall into this category. Some HD pickup and van owners accrue relatively few vehicle miles traveled per year, such that they may be less likely to adopt new fuel efficiency technologies, while other owners who use their vehicle(s) with greater intensity may be even more willing to pay for fuel efficiency improvements. Regardless of the type of customer, their determination of minimum total cost of ownership involves the customer balancing their own unique circumstances with a heavy-duty vehicle's initial purchase price, availability of credit and lease options, expectations of vehicle reliability, resale value and fuel efficiency technology payback periods. The degree of the incentive to adopt additional fuel efficiency technologies also depends on customer expectations of future fuel prices, which directly impacts customer expectations of the payback period.

Another factor the agencies considered is that other federal and state-level policies and programs are specifically aimed at stimulating fuel efficiency technology development and deployment. Particularly relevant to this sector are DOE's 21st Century Truck Partnership, EPA's voluntary SmartWay Transport program, and California's AB32 fleet requirements.<sup>787 788 789</sup> The future availability of more cost-effective technologies to reduce fuel consumption could provide manufacturers an incentive to produce

<sup>785</sup> OMB Circular A-4, September 17, 2003. Available at [http://www.whitehouse.gov/omb/circulars\\_a004\\_a-4](http://www.whitehouse.gov/omb/circulars_a004_a-4).

<sup>786</sup> NEPA requires agencies to consider a "no action" alternative in their NEPA analyses and to compare the effects of not taking action with the effects of the reasonable action alternatives to demonstrate the different environmental effects of the action alternatives. See 40 CFR 1502.2(e), and 1502.14(d). CEQ has explained that "[T]he regulations require the analysis of the no action alternative even if the agency is under a court order or legislative command to act. This analysis provides a benchmark, enabling decision makers to compare the magnitude of environmental effects of the action alternatives. [See 40 CFR 1502.14(c).] \* \* \* Inclusion of such an analysis in the EIS is necessary to inform Congress, the public, and the President as intended by NEPA. [See 40 CFR 1500.1(a).]" Forty Most Asked Questions Concerning CEQ's National Environmental Policy Act Regulations, 46 FR 18026 (1981) (emphasis added).

<sup>787</sup> <http://energy.gov/eere/vehicles/vehicle-technologies-office-21st-century-truck>.

<sup>788</sup> <http://www.epa.gov/smartway/>.

<sup>789</sup> State of California Global Warming Solutions Act of 2006 (Assembly Bill 32, or AB32).

more fuel-efficient medium- and heavy-duty vehicles, which in turn could provide customers an incentive to purchase these vehicles. The availability of more cost-effective technologies to reduce fuel consumption could also lead to a substitution of less cost-effective technologies, where overall fuel efficiency could remain fairly flat if buyers are less interested in fuel consumption improvements than in reduced vehicle purchase prices and/or improved vehicle performance and/or utility.

Although we have estimated the cost and efficacy of fuel-saving technologies assuming performance and utility will be held constant, some uncertainty remains regarding whether these conditions will actually be observed. In particular, we have assumed payload will be preserved (and possibly improved via reduced vehicle curb weight); however, some fuel-saving technologies, such as natural gas fueled vehicles and hybrid electric vehicles, could reduce payload via increased curb weight due to the fuel tanks or added electrical machine, batteries and controls. It is also possible that under extended high power demand resulting from a vehicle towing up a road grade, certain types of hybrid powertrains could experience a temporary loss of towing capacity if the capacity of the hybrid's energy storage device (e.g., batteries, hydraulic accumulator) is insufficient for the extended power demand. We have also assumed that fuel-saving technologies will be no more or less reliable than technologies already in production. However, if manufacturers pursue risky technologies or if the agencies provide insufficient lead-time to fully develop new technologies, they could prove to be less reliable, perhaps leading to increased repair costs and out-of-service time. This was observed as an unintended consequence of certain manufacturers' initial introduction of certain emissions control technologies to meet EPA's most stringent heavy-duty engine standards. If the fuel-saving technologies considered here ultimately involve similar reliability problems, overall costs will be greater than we have estimated. We have assumed drivers will be as accepting of new fuel-saving technologies as they are of technologies already in service. However, drivers could be less accepting of newer technologies—particularly any which must be deployed manually. Except for increased costs to replace more efficient tires, we have assumed that routine maintenance costs will not increase or decrease. However, maintenance of new

technologies could involve unique tools and parts. Therefore, maintenance costs could increase, and maintenance could involve increased vehicle out-of-service time. On the other hand new technologies can sometimes prove to be more reliable and require less maintenance than the technologies they replace. One example of this is the auxiliary power unit (APU) frequently installed on heavy-duty sleeper cab tractors. In the past these have been typically powered by small nonroad diesel engines that can require more frequent maintenance than the main engine of the tractor itself. However, more recently, as electric battery technology has advanced, some tractor manufacturers have introduced battery APUs instead of engine-driven APUs. A comparison of recent sales of small engine driven APUs versus battery APUs suggests that customers may prefer battery APUs,<sup>790</sup> and some operators and tractor dealerships have also told the agencies that the decrease in routine maintenance was an important factor in purchase decisions in favor of battery APUs. Again, insofar as these unaccounted-for costs or savings actually occur, overall costs could be larger or smaller than we have estimated. We have also applied the EIA's AEO estimates of future fuel prices; however, heavy-duty vehicle customers could have different expectations about future fuel prices, and could therefore be more inclined or less inclined to apply new technology to reduce fuel consumption than might be expected based on EIA's forecast. We expect that vehicle customers will be uncertain about future fuel prices, and that this uncertainty will be reflected in the degree of enthusiasm to apply new technology to reduce fuel consumption.

Considering all of these factors, the agencies have approached the definition of the No Action Alternative separately for each vehicle and engine category covered by today's proposal.

For trailers, the agencies considered two No Action alternatives to cover a nominal range of uncertainty. The trailer category is unique in the context of this rulemaking because it is the only heavy-duty category not regulated under Phase 1. In both No Action cases, the agencies projected that the combination of EPA's voluntary SmartWay program, DOE's 21st Century Truck Partnership, California's AB32 trailer requirements for fleets, and the potential for significantly reduced operating costs should result in continuing

improvement to new trailers. Taking this into account, the agencies project that in 2018, 50 percent of new 53' dry van and reefer trailers would have technologies qualifying for the SmartWay label (5 percent aerodynamic improvements and lower rolling resistance tires) and 50 percent would have automatic tire inflation systems to maintain optimal tire pressure. We also project that adoption of those same technologies would increase 1 percent per year until each technology is being used on 60 percent of new trailers. In the first case, Alternative 1a, this means that the agencies project that in the absence of new standards, the new trailer fleet technology would stabilize in 2027 to a level of 60 percent adoption in 2027 for the No Action alternative. In the second case, Alternative 1b, the agencies projected that the fraction of the in-use fleet qualifying for SmartWay would continue to increase beyond 2027 as older trailers are replaced by newer trailers. We projected that these improvements would continue until 2040 when 75 percent of new trailers would be assumed to include skirts.

For vocational vehicles, the agencies considered one No Action alternative. For the vocational vehicle category the agencies recognized that these vehicles tend to operate over fewer vehicle miles travelled per year. Therefore, the projected payback periods for fuel efficiency technologies available for vocational vehicles are generally longer than the payback periods the agencies consider likely to lead to their adoption based solely on market forces. This is especially true for vehicles used in applications in which the vehicle operation is secondary to the primary business of the company using the vehicle. For example, since the fuel consumption of vehicles used by utility companies to repair power lines would generally be a smaller cost relative to the other costs of repairing lines, fuel saving technologies would generally not be as strongly demanded for such vehicles. Thus, the agencies project that fuel-saving technologies would either not be applied or only be applied as a substitute for more expensive fuel efficiency technologies, except as necessitated by the Phase 1 fuel consumption and GHG standards.

For tractors, the agencies considered two No Action alternatives to cover a nominal range of uncertainty. For Alternative 1a the agencies project that fuel-saving technologies would either not be applied or only be applied as a substitute for more expensive fuel efficiency technologies to tractors (thereby enabling manufacturers to offer tractors that are less expensive to

<sup>790</sup> Confidence Report: Idle-Reduction Solutions, North American Council for Freight Efficiency, Lee, Tessa, 2014, p. 13.

purchase), except as necessitated by the Phase 1 fuel consumption and GHG standards. In Alternative 1b the agencies estimated that some available technologies would save enough fuel to pay back fairly quickly—within the first six months of ownership. The agencies considered a range of information to formulate these two baselines for tractors.

Both public<sup>791</sup> and confidential historical information shows that tractor trailer fuel efficiency improved steadily through improvements in engine efficiency and vehicle aerodynamics over the past 40 years, except for engine efficiency which decreased or was flat between 2000 and approximately 2007 as a consequence of incorporating technologies to meet engine emission regulations. Today vehicle manufacturers, the Federal Government, academia and others continue to invest in research to develop fuel efficiency improving technologies for the future.

There is also evidence that manufacturers have, in the past, applied technologies to improve fuel efficiency absent a regulatory requirement to do so. Some manufacturers have even taken regulatory risk in order to increase fuel efficiency; in the 1990s, when fuel was comparatively inexpensive, some tractor manufacturers designed tractor engine controls to determine when the vehicle was not being emissions tested and, under such conditions, shift to more fuel-efficient operation even though doing so caused the vehicles to violate federal standards for NO<sub>x</sub> emissions. Also, some manufacturers have recently expressed concern that the Phase 1 tractor standards do not credit them for fuel-saving technologies they had already implemented before the Phase 1 standards were adopted.

In public meetings and in meetings with the agencies, the trucking industry stated that fuel cost for tractors is the number one or number two expense for many operators, and therefore is a very important factor for their business. However, the pre-Phase 1 market suggests that, tractor manufacturers and operators could be slow to adopt some new technologies, even where the agencies have estimated that the technology would have paid for itself

within a few months of operation. Tractor operators have told the agencies they generally require technologies to be demonstrated in their fleet before widespread adoption so they can assess the actual fuel savings for their fleet and any increase in cost associated with effects on vehicle operation, maintenance, reliability, mechanic training, maintenance and repair equipment, stocking unique parts and driver acceptance, as well as effects on vehicle resale value. Tractor operators have publicly stated they would consider conducting an assessment of technologies when provided with data that show the technologies may payback costs through fuel savings within 18 to 24 months, based on their assumptions about future fuel costs. In these cases, an operator may first conduct a detailed paper study of anticipated costs and benefits. If that study shows likely payback in 18 to 24 months for their business, the fleet may acquire one or several tractors with the technology to directly measure fuel savings, costs and driver acceptance for their fleet. Small fleets may not have resources to conduct assessments to this degree and may rely on information from larger fleets or observations of widespread acceptance of the technology within the industry before adopting a technology. This uncertainty over the actual fuel savings and costs and the lengthy process to assess technologies significantly slows the pace at which fuel efficiency technologies are adopted.

The agencies believe that using the two baselines addresses the uncertainties we have identified for tractors. The six-month payback period of Alternative 1b reflects the agencies' consideration of factors, discussed above, that could limit—yet not eliminate—manufacturers' tendencies to voluntarily improve fuel consumption. In contrast, Alternative 1a reflects a baseline for vehicles other than trailers wherein manufacturers either do not apply fuel efficiency technologies or only apply them as a substitute for more expensive fuel efficiency technologies, except as necessitated by the Phase 1 fuel consumption and GHG standards.

For HD pickups and vans, the agencies considered two No Action alternatives to cover a nominal range of uncertainty. In Alternative 1b the agencies considered additional technology application, which involved the explicit estimation of the potential to add specific fuel-saving technologies to each specific vehicle model included in the agencies' HD pickup and van fleet analysis, as discussed in Chapter VI. Estimated technology application and corresponding impacts depend on the

modeled inputs. Also, under this approach a manufacturer that has improved fuel consumption and GHG emissions enough to achieve compliance with the standards is assumed to apply further improvements, provided those improvements reduce fuel outlays by enough (within a specified amount of time, the payback period) to offset the additional costs to purchase the new vehicle. These calculations explicitly account for and respond to fuel prices, vehicle survival and mileage accumulation, and the cost and efficacy of available fuel-saving technologies. Therefore, all else being equal, more technology is applied when fuel prices are higher and/or technology is more cost-effective. Manufacturers of HD pickups and vans have reported to the agencies that buyers of these vehicles consider the total cost of vehicle ownership, not just new vehicle price, and that manufacturers plan as if buyers will expect fuel consumption improvements to “pay back” within periods ranging from approximately one to three years. For example, some manufacturers made decisions to introduce more efficient HD vans and HD pickup transmissions before such vehicles were subject to fuel consumption and/or GHG standards. However, considering factors discussed above that could limit manufacturers' tendency to voluntarily improve HD pickup and van fuel consumption, Alternative 1b applies a 6-month payback period. In contrast for Alternative 1a the agencies project that fuel-saving technologies would either not be applied or only be applied as a substitute for more expensive fuel efficiency technologies, except as necessitated by the Phase 1 fuel consumption and GHG standards. The Method A sensitivity analysis presented above in Section VI also examines other payback periods. In terms of impacts under reference case fuel prices, the payback period input plays a more significant role under the No-Action Alternatives (defined by a continuation of model year 2018 standards) than under the more stringent regulatory alternatives described next.

## (2) Alternative 2: Less Stringent Than the Preferred Alternative

For vocational vehicles and combination tractor-trailers, Alternative 2 represents a stringency level which is approximately half as stringent overall as the preferred alternative. The agencies developed Alternative 2 to consider a continuation of the Phase 1 approach of applying off-the-shelf technologies rather than requiring the development of new technologies or

<sup>791</sup> Committee to Assess Fuel Economy Technologies for Medium- and Heavy-Duty Vehicles; National Research Council; Transportation Research Board (2010). “Technologies and Approaches to Reducing the Fuel Consumption of Medium- and Heavy-Duty Vehicles,” (hereafter, “NAS 2010”). Washington, DC: The National Academies Press. Available electronically from the National Academies Press Web site at [http://www.nap.edu/catalog.php?record\\_id=12845](http://www.nap.edu/catalog.php?record_id=12845) (last accessed September 10, 2010).

fundamental improvements to existing technologies. For tractors and vocational vehicles, this also involved less integrated optimization of the vehicles and engines. Put another way, Alternative 2 is not technology-forcing. See, e.g., *Sierra Club v. EPA*, 325 F. 3d 374, 378 (D.C. Cir. 2003) (under a technology-forcing provision, EPA “must consider future advances in pollution control capability”); see also similar discussion in *Husqvarna AB v. EPA*, 254 F. 3d 195, 201 (D.C. Cir. 2001).

The agencies’ decisions regarding which technologies could be applied to comply with Alternative 2 considered not only the use of off-the shelf technologies, but also considered other factors as well, such as how broadly certain technologies fit in-use applications and regulatory structure. The resulting Alternative 2 could be met with most of the same technologies the agencies project could be used to meet the proposed standards, although at lower application rates. Alternative 2 is estimated to be achievable without the application of some technologies, at any level. These and other differences are described below by category.

The agencies project that Alternative 2 combination tractor standards could be met by applying lower adoption rates of the projected technologies for Alternative 3. This includes a projection of slightly lower per-technology effectiveness for Alternative 2 versus 3. Alternative 2 also assumes that there would be little optimization of combination tractor powertrains.

The agencies project that the Alternative 2 vocational vehicle standard could be met without any use of strong hybrids. Rather, it could be met with lower adoption rates of the other technologies that could be used to meet Alternative 3, our proposed standards. This includes a projection of slightly lower per-technology effectiveness for Alternative 2 versus 3 and little optimization of vocational vehicle powertrains.

The Alternative 2 trailer standards would apply to only 53-foot dry and refrigerated box trailers and could be met through the use of less effective aerodynamic technologies and higher rolling resistance tires versus what the agencies projected could be used to meet Alternative 3.

As discussed above in Section VI.D., the HD pickup truck and van alternatives are characterized by an annual required percentage change (decrease) in the functions defining attribute-based targets for per-mile fuel consumption and GHG emissions. Under the standards in each alternative, a manufacturer’s fleet would, setting

aside any changes in production mix, be required to achieve average fuel consumption/GHG levels that increase in stringency every year relative to the standard defined for MY2018 (and held constant through 2020) that establishes fuel consumption/GHG targets for individual vehicles. A manufacturer’s specific fuel consumption/GHG requirement is the sales-weighted average of the targets defined by the work-factor curve in each year. Therefore, although the alternatives involve steady increases in the functions defining the targets, stringency increases faced by any individual manufacturer may not be steady if changes in the manufacturer’s product mix cause fluctuations in the average fuel consumption and GHG levels required of the manufacturer. See Section VI.D. for additional discussion of this topic. Alternative 2 represents a 2.0 percent annual improvement through 2025 in fuel consumption/GHG emissions relative to the work-factor curve in 2020. This would be 0.5 percent less stringent per year compared to the proposed standards of Alternative 3.

For HD pickups and vans the agencies project that most manufacturers could comply with the standards defining Alternative 2 by applying technologies similar to those that could be applied in order to comply with the proposed standards, but at lower application rates than could be necessitated by the proposed standards. The biggest technology difference the agencies project between Alternative 2 and the proposed standards of Alternative 3 would be that we project that most manufacturers could meet the Alternative 2 standards without any use of stop-start or other mild or strong hybrid technologies.

Of course, these estimates depend not only on the stringency of the standards defining this regulatory alternative, but also on other input estimates, in particular the detailed composition of the agencies’ HD pickup and van market forecast; the agencies’ estimates of the future availability, cost, and efficacy of fuel-saving HD pickup and van technologies; and the agencies’ estimates of future fuel prices. Even without changes to the standards defining this regulatory alternative, changes to analysis inputs would lead to different estimates of the extent to which various technologies might be applied under this regulatory alternative.

The agencies are not proposing Alternative 2 as a matter of both policy and law. Based on our current analysis for each of the subcategories, it

presently appears that technically feasible alternate standards are available that provide for greater emission reductions and reduced fuel consumption, including the proposed standards. Such alternative standards, including the proposed standards and potentially Alternative 4, are feasible at reasonable cost, considering both per-vehicle and per-engine cost, cost-effectiveness, and lead time. Consequently, at this point the agencies do not believe that the modest improvements in Alternative 2 would be appropriate or otherwise reasonable under Section 202(a)(1) and (2) of the Clean Air Act, or represent the “maximum feasible improvement” within the meaning of 49 U.S.C. 32902(k)(2).

### (3) Alternative 3: Preferred Alternative and Proposed Standards

The agencies are proposing Alternative 3 for HD engines, HD pickup trucks and vans, Class 2b through Class 8 vocational vehicles, Class 7 and 8 combination tractors, and most categories of trailers. Details regarding modeling of this alternative are included in Chapter 5 of the draft RIA.

Unlike the Phase 1 standards where the agencies projected that manufacturers could meet the Phase 1 standards with off-the-shelf technologies only, the agencies project that Alternative 3 standards could be met through a combination of off-the-shelf technologies applied at higher market penetration rates and new technologies that are still in various stages of development and not yet in production. Although this alternative is technology-forcing, it must be kept in mind that the standards themselves are performance-based and thus do not mandate any particular technology be used to meet the standards. The agencies recognize that there is some uncertainty in projecting costs and effectiveness for those technologies not yet available on the market, but we do not believe, as discussed comprehensively in Sections II, III, IV, V, and VI, that such uncertainty is not sufficient to render Alternative 3 beyond the reasonable or maximum feasible level of stringency for each of the vehicle categories covered by this program. Given that all of the proposed standards are performance-based rather than mandates of specific technologies, and given that the lead time for the most stringent standards in Alternative 3 is greater than 10 years, the agencies believe that the performance that would be required by these stringency levels of Alternative 3 would allow each manufacturer to choose to develop

technology and apply it to their vehicles in a way that balances their unique business constraints and reflects their specific market position and customers' needs.

We have described in detail above, and also in Chapter 2 of the draft RIA, the precise bases for each of the proposed standards (that is, for each segment covered under the program). For HD pickups and vans, Alternative 3 represents a 2.5 percent compounded annual improvement through 2027 in fuel consumption/GHG emissions relative to the work-factor curve in 2020.

Sections II through VI of this notice provide comprehensive explanations of the consideration that the agencies gave to proposing standards that are more accelerated than Alternative 3, based on the agencies' projection of how such standards could be met through the accelerated application of technologies and our reasons for concluding that the identified technologies for each of the vehicle and engine standards that constitute Alternative 3 represent the maximum feasible (within the meaning of 49 U.S.C. 32902(k)) and reasonable (for purposes of CAA section 202 (a)) based on all of the information available to the agencies at the time of this proposal.

#### (4) Alternative 4: More Accelerated Than the Preferred Alternative

As indicated by its description in the title above, Alternative 4 represents standards that are effective on a more accelerated timeline in comparison to the timeline of the proposed standards in Alternative 3. The agencies believe that Alternative 4 could potentially be maximum feasible and appropriate, but at this time the agencies have identified sufficient uncertainty in the information that the agencies have considered with respect to the technologies' readiness, effectiveness and costs such that the agencies cannot yet conclude that Alternative 4 represents maximum feasible and appropriate standards. Accordingly, although we are not proposing Alternative 4, we are requesting comment on adopting some or all of Alternative 4 in the final rule. The agencies would especially welcome data on the projected readiness, effectiveness, and costs of technologies the agencies consider for compliance with Alternative 4 standards, which in many cases are identical to the technologies considered for the Alternative 3 standards. It would be especially helpful if commenters addressed each category separately; namely, tractors and vocational vehicles and their engines; trailers, and pickups

and vans. The agencies would consider adopting Alternative 4's stringencies and lead time for the final rule, depending on the information and comments received in response to this notice and based on additional consideration of the information we already have in-hand.

Alternatives 3 and 4 were both designed to achieve similar fuel efficiency and GHG emission levels in the long term but with Alternative 4 being accelerated in its implementation timeline. Specifically, alternative 4 reflects the same or similar standard stringency levels as alternative 3, but 3 years sooner (2 years for heavy-duty pickups and vans), so that the final phase of the standards would occur in MY 2024, or (for heavy duty pickups and vans) 2025.

As discussed above and in the feasibility discussions in Sections II–VI, we are not proposing Alternative 4. By accelerating the adoption schedule, this option would result in several model years of incrementally greater fuel consumption and GHG emission reductions than Alternative 3, but it does raise concerns about adequacy of lead time. The agencies have outstanding questions regarding relative risks and benefits of Alternative 4 due to the timeframe envisioned by that alternative.

The agencies recognize the potential for larger net benefits if Alternative 4 were selected, and we therefore welcome comments addressing the feasibility and availability of relevant technologies in the identified lead time. Commenters are particularly encouraged to address all aspects of feasibility analysis, including effectiveness and costs, the likelihood of developing available technologies to achieve sufficient reliability within the proposed lead time, and the extent to which the heavy-duty vehicle market would accept and utilize the technology. Comments should ideally address these issues separately for each type of technology, especially with respect to advanced technologies like waste heat recovery systems and hybrid powertrains. Although we summarize the specific differences below, readers are encouraged to see Sections II through VI for more detailed descriptions of how the agencies projected how manufacturers could implement certain technologies in order to meet the standards of Alternative 4.

The agencies project that Alternative 4 combination tractor standards could be met by applying initially higher adoption rates of the projected technologies for Alternative 3. This includes a projection of slightly higher

per-technology effectiveness for Alternative 4 versus 3. Alternative 4 also assumes that there would be more optimization of combination tractor powertrains and earlier market penetration of engine waste heat recovery systems.

The agencies project that the Alternative 4 vocational vehicle standard could be met through earlier adoption rates of the same technology packages projected for Alternative 3. This includes a projection of slightly higher per-technology effectiveness for Alternative 4 versus 3.

The Alternative 4 trailer standards could be met through earlier implementation of more effective aerodynamic technologies, including the use of aerodynamic skirts and boat tails. This would be in addition to implementing lower rolling resistance tires for nearly all trailers.

HD pickup truck and van standards defining Alternative 4 represent a 3.5 percent annual improvement in fuel consumption and GHG emissions through 2025 relative to the work-factor curves in 2020. Of course, this finding depends not only on the stringency of the standards defining this regulatory alternative, but also on other input estimates, in particular the detailed composition of the agencies' HD pickup and van market forecast; the agencies' estimates of the future availability, cost, and efficacy of fuel-saving HD pickup and van technologies; and the agencies' estimates of future fuel prices. Even without changes to the standards defining this regulatory alternative, changes to analysis inputs will lead to different estimates of the extent to which various technologies might be applied under this regulatory alternative.

#### (5) Alternative 5: Even More Stringent Standards With No Additional Lead-Time

Alternative 5 represents even more stringent standards compared to Alternatives 3 and 4, as well as the same implementation timeline as Alternative 4. As discussed above and in the feasibility discussions in Sections II–VI, we are not proposing Alternative 5 because we cannot project that manufacturers can develop and introduce in sufficient quantities the technologies that could be used to meet Alternative 5 standards. We believe that for some or all of the categories, the Alternative 5 standards are technically infeasible within the lead time allowed. We have not fully estimated costs for this alternative for tractors and vocational vehicles because we believe that there would be such substantial



additional costs related to pulling ahead the development of so many additional technologies that we cannot accurately predict these costs. We also believe this alternative could result in a decrease in the in-use reliability and durability of new heavy-duty vehicles and that we do not have the ability to accurately quantify the costs that would be associated with such problems. Instead we merely note that costs would be significantly greater than the estimated costs for Alternatives 3 and 4.

*B. How do these alternatives compare in overall fuel consumption and GHG emissions reductions and in benefits and costs?*

The following tables compare the overall fuel consumption and GHG emissions reductions and benefits and costs of each of the regulatory alternatives the agencies considered.

Note that for tractors, trailers, pickups and vans the agencies compared overall fuel consumption and GHG emissions reductions and benefits and costs relative to two different baselines, described above in the section on the No Action alternative. Therefore, for tractors, trailers, pickups and vans two results are listed; one relative to each baseline, namely Alternative 1a and Alternative 1b.

Also note that the agencies analyzed pickup and van overall fuel consumption and emissions reductions and benefits and costs using the NHTSA's CAFE model (Method A). In addition, the agencies used EPA's MOVES model to estimate pickup and van fuel consumption and emissions and a cost methodology that applied vehicle costs in different model years (Method B). In both cases, the agencies used the CAFE model to estimate

average per vehicle cost, and this analysis extended through model year 2030.<sup>792</sup> The agencies concluded that in these instances the choice of baseline and the choice of modeling approach (Method A versus Method B) did not impact the agencies' decision to propose Alternative 3 as the preferred alternative and hence the proposed standards for HD pickups and vans.

Table X-1 compares fuel savings, technology costs, avoided emissions, total costs, and benefits for the above regulatory alternatives as estimated under Method A. Table X-2 provides the same comparisons for Method B. Subsequent tables summarize segment-specific results and projections for longer-term impacts. The regulatory impact analysis (RIA) accompanying today's notice presents more detailed results of the agencies' analysis.

(1) Method A Tables

**TABLE X-1—SUMMARY OF COSTS AND BENEFITS THROUGH MY 2029 BY ALTERNATIVE, DISCOUNTED AT 3% (RELATIVE TO BASELINE 1a), METHOD A<sup>a</sup>**

Vehicle segment	Alt 2	Alt 3	Alt 4	Alt 5
<b>Discounted pre-tax fuel savings (\$billion)</b>				
HD pickups and Vans .....	11.7	18.3	22.3	24.8
Vocational Vehicles .....	5.6	18.4	24.3	38.5
Tractors/Trailers .....	88.1	138.4	151.7	196.8
Total .....	105.4	175.1	198.3	260.2
<b>Discounted Total technology costs (\$billion)</b>				
HD pickups and Vans .....	3.0	5.0	8.2	9.9
Vocational Vehicles .....	1.2	7.6	10.8	26.0
Tractors/Trailers .....	9.2	12.8	15.3	34.8
Total .....	13.4	25.4	34.3	70.6
<b>Discounted value of emissions reductions (\$billion)</b>				
HD pickups and Vans .....	3.0	4.8	5.9	6.6
Vocational Vehicles .....	1.7	6.1	8.1	13.1
Tractors/Trailers .....	40.7	62.7	67.9	87.7
Total .....	45.4	73.7	82.0	107.4
<b>Total costs (\$billion)</b>				
HD pickups and Vans .....	3.5	5.7	9.1	15.2
Vocational Vehicles .....	3.0	9.5	12.8	28.1
Tractors/Trailers .....	11.5	15.5	18.1	37.5
Total .....	18.0	30.8	40.0	80.8
<b>Total benefits (\$billion)</b>				
HD pickups and Vans .....	17.2	27.0	33.0	36.7
Vocational Vehicles .....	12.7	31.2	39.7	60.2
Tractors/Trailers .....	142.5	217.5	236.7	304.2
Total .....	172.4	275.8	309.4	401.1

<sup>792</sup> Although the agencies have considered regulatory alternatives involving standards increasing in stringency through, at the latest, 2027,

the agencies extended the CAFE modeling analysis through model year 2030 rather than model year 2027 in order to obtain more fully stabilized results

given projected product cadence, multiyear planning, and application of earned credits.



TABLE X-1—SUMMARY OF COSTS AND BENEFITS THROUGH MY 2029 BY ALTERNATIVE, DISCOUNTED AT 3% (RELATIVE TO BASELINE 1a), METHOD A<sup>a</sup>—Continued

Vehicle segment	Alt 2	Alt 3	Alt 4	Alt 5
<b>Net benefits (\$billion)</b>				
HD pickups and Vans .....	13.7	21.3	23.9	21.5
Vocational Vehicles .....	9.6	21.7	26.9	32.1
Tractors/Trailers .....	131.0	202.0	218.7	266.7
Total .....	154.3	245.0	269.4	320.3

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE X-2—SUMMARY OF PROGRAM BENEFITS AND COSTS THROUGH MY 2029, DISCOUNTED AT 3% (RELATIVE TO BASELINE 1B), METHOD A<sup>a</sup>

Vehicle segment	Alt 2	Alt 3	Alt 4	Alt 5
<b>Discounted pre-tax fuel savings (\$billion)</b>				
HD pickups and Vans .....	9.6	15.9	19.1	22.2
Vocational Vehicles .....	5.6	18.4	24.3	38.5
Tractors/Trailers .....	80.5	130.8	144.0	189.2
Total .....	95.6	165.1	187.4	250.0
<b>Discounted Total technology costs (\$billion)</b>				
HD pickups and Vans .....	2.5	5.0	7.2	9.7
Vocational Vehicles .....	1.2	7.6	10.8	25.9
Tractors/Trailers .....	8.9	12.5	15.0	34.4
Total .....	12.5	25.0	32.9	70.0
<b>Discounted value of emissions reductions (\$billion)</b>				
HD pickups and Vans .....	2.8	4.5	5.4	6.3
Vocational Vehicles .....	1.7	6.1	8.1	13.1
Tractors/Trailers .....	37.5	59.4	64.6	84.4
Total .....	41.9	70.1	78.2	103.8
<b>Total costs (\$billion)</b>				
HD pickups and Vans .....	2.8	5.5	7.8	10.4
Vocational Vehicles .....	3.0	9.5	12.8	28.0
Tractors/Trailers .....	11.2	15.2	17.7	37.2
Total .....	17.0	30.3	38.4	75.7
<b>Total benefits (\$billion)</b>				
HD pickups and Vans .....	14.1	23.5	28.3	32.9
Vocational Vehicles .....	12.7	31.2	39.7	60.2
Tractors/Trailers .....	131.1	206.2	225.4	292.8
Total .....	157.9	260.9	293.3	385.9
<b>Net benefits (\$billion)</b>				
HD pickups and Vans .....	11.3	18.0	20.4	22.5
Vocational Vehicles .....	9.6	21.7	26.9	32.1
Tractors/Trailers .....	119.9	191.0	207.6	255.6
Total .....	140.9	230.7	254.9	310.3

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

The following two tables summarize results for each of the segments covered by today's proposal, discounted at 7 percent.

TABLE X-3—SUMMARY OF PROGRAM BENEFITS AND COSTS THROUGH MY 2029, DISCOUNTED AT 7% (RELATIVE TO BASELINE 1a), METHOD A<sup>a</sup>

Vehicle segment	Alt 2	Alt 3	Alt 4	Alt 5
<b>Discounted pre-tax fuel savings (\$billion)</b>				
HD pickups and Vans .....	6.4	9.9	12.2	13.6
Vocational Vehicles .....	2.9	9.7	13.0	20.9
Tractors/Trailers .....	47.7	74.6	82.3	107.3
Total .....	57.0	94.2	107.5	141.8
<b>Discounted Total technology costs (\$billion)</b>				
HD pickups and Vans .....	2.1	3.4	5.7	6.9
Vocational Vehicles .....	0.8	5.0	7.3	17.8
Tractors/Trailers .....	6.3	8.7	10.5	23.9
Total .....	9.1	17.1	23.5	48.6
<b>Discounted value of emissions reductions (\$billion)</b>				
HD pickups and Vans .....	2.7	4.3	5.3	5.9
Vocational Vehicles .....	1.4	5.0	6.6	10.6
Tractors/Trailers .....	29.9	46.3	50.4	65.4
Total .....	34.0	55.6	62.3	81.8
<b>Total costs (\$billion)</b>				
HD pickups and Vans .....	2.4	3.8	6.2	10.1
Vocational Vehicles .....	1.8	6.1	8.4	19.0
Tractors/Trailers .....	7.6	10.3	12.1	25.5
Total .....	11.8	20.2	26.7	54.6
<b>Total benefits (\$billion)</b>				
HD pickups and Vans .....	10.4	16.3	20.1	22.3
Vocational Vehicles .....	7.3	18.3	23.6	36.2
Tractors/Trailers .....	85.1	130.0	142.2	183.5
Total .....	102.9	164.6	185.8	242.1
<b>Net benefits (\$billion)</b>				
HD pickups and Vans .....	8.1	12.4	13.9	12.2
Vocational Vehicles .....	5.5	12.2	15.2	17.2
Tractors/Trailers .....	77.5	119.7	130.1	158.0
Total .....	91.1	144.4	159.1	187.5

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE X-4—SUMMARY OF PROGRAM BENEFITS AND COSTS THROUGH MY 2029, DISCOUNTED AT 7% (RELATIVE TO BASELINE 1b), METHOD A<sup>a</sup>

Vehicle segment	Alt 2	Alt 3	Alt 4	Alt 5
<b>Discounted pre-tax fuel savings (\$billion)</b>				
HD pickups and Vans .....	5.2	8.5	10.4	12.2
Vocational Vehicles .....	2.9	9.7	13.0	20.9
Tractors/Trailers .....	44.0	71.0	78.6	103.7
Total .....	52.2	89.2	102.0	136.8
<b>Discounted Total technology costs (\$billion)</b>				
HD pickups and Vans .....	1.7	3.4	4.9	6.7
Vocational Vehicles .....	0.8	5.0	7.3	17.8
Tractors/Trailers .....	6.0	8.4	10.3	23.7

TABLE X-4—SUMMARY OF PROGRAM BENEFITS AND COSTS THROUGH MY 2029, DISCOUNTED AT 7% (RELATIVE TO BASELINE 1b), METHOD A<sup>a</sup>—Continued

Vehicle segment	Alt 2	Alt 3	Alt 4	Alt 5
Total .....	8.5	16.8	22.5	48.2
<b>Discounted value of emissions reductions (\$billion)</b>				
HD pickups and Vans .....	2.5	4.0	4.8	5.5
Vocational Vehicles .....	1.4	5.0	6.6	10.6
Tractors/Trailers .....	27.5	43.9	48.0	63.0
Total .....	31.4	52.9	59.4	79.1
<b>Total costs (\$billion)</b>				
HD pickups and Vans .....	1.9	3.7	5.3	7.1
Vocational Vehicles .....	1.8	6.1	8.4	19.0
Tractors/Trailers .....	7.3	10.0	11.9	25.3
Total .....	11.1	19.8	25.6	51.4
<b>Total benefits (\$billion)</b>				
HD pickups and Vans .....	8.6	14.1	17.1	20.0
Vocational Vehicles .....	7.3	18.3	23.6	36.2
Tractors/Trailers .....	78.9	123.7	135.9	177.3
Total .....	94.8	156.2	176.6	233.5
<b>Net benefits (\$billion)</b>				
HD pickups and Vans .....	6.7	10.5	11.9	12.9
Vocational Vehicles .....	5.5	12.2	15.2	17.2
Tractors/Trailers .....	71.5	113.7	124.0	152.0
Total .....	83.7	136.4	151.1	182.2

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

While the agencies' explicit analysis through model year 2030, the resulting summarized in the following two tables of manufacturers' potential responses to fuel savings and avoided emissions occur as those vehicles today's proposed standards extends

TABLE X-5—FUEL SAVINGS AND GHG EMISSIONS REDUCTIONS BY VEHICLE SEGMENT, RELATIVE TO BASELINE 1a, METHOD A<sup>a</sup>

MY 2018–2029 Total	Fuel reductions (billion gallons)	Upstream & downstream GHG reductions (MMT)
<b>Alternative 2</b>		
HD Pickup Trucks/Vans .....	5.5	67.5
Vocational Vehicles .....	2.5	33.6
Tractors and Trailers .....	37.8	518.8
Total .....	45.8	619.9
<b>Alt. 3—Preferred Alternative</b>		
HD Pickup Trucks/Vans .....	8.8	107.6
Vocational Vehicles .....	8.3	110.3
Tractors and Trailers .....	59.5	816.4
Total .....	76.7	1,034.3
<b>Alt. 4</b>		
HD Pickup Trucks/Vans .....	10.7	130.5
Vocational Vehicles .....	10.9	143.8

TABLE X-5—FUEL SAVINGS AND GHG EMISSIONS REDUCTIONS BY VEHICLE SEGMENT, RELATIVE TO BASELINE 1a, METHOD A<sup>a</sup>—Continued

MY 2018–2029 Total	Fuel reductions (billion gallons)	Upstream & downstream GHG reductions (MMT)
Tractors and Trailers .....	65.0	892.1
Total .....	86.7	1,166.4
Alt. 5		
HD Pickup Trucks/Vans .....	12.0	145.4
Vocational Vehicles .....	17.3	226.9
Tractors and Trailers .....	84.2	1,155.1
Total .....	113.4	1,527.4

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE X-6—FUEL SAVINGS AND GHG EMISSIONS REDUCTIONS BY VEHICLE SEGMENT, RELATIVE TO BASELINE 1b, METHOD A<sup>a</sup>

MY 2018–2029 Total	Fuel reductions (billion gallons)	Upstream & downstream GHG reductions (MMT)
Alternative 2		
HD Pickup Trucks/Vans .....	4.5	55.5
Vocational Vehicles .....	2.5	33.6
Tractors and Trailers .....	34.4	471.9
Total .....	41.4	561.0
Alt. 3—Preferred Alternative		
HD Pickup Trucks/Vans .....	7.8	94.1
Vocational Vehicles .....	8.3	110.3
Tractors and Trailers .....	56.1	769.4
Total .....	72.2	973.8
Alt. 4		
HD Pickup Trucks/Vans .....	9.3	112.8
Vocational Vehicles .....	10.9	143.8
Tractors and Trailers .....	61.6	845.2
Total .....	81.8	1,101.8
Alt. 5		
HD Pickup Trucks/Vans .....	10.8	130.5
Vocational Vehicles .....	17.3	226.9
Tractors and Trailers .....	80.7	1,108.2
Total .....	108.8	1,465.6

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

Results presented above are cumulative, spanning model years 2018–2029. Underlying these results are

estimates of impacts for each specific model year. As an example, Table X-7

shows costs, benefits, and net benefits specific to model year 2029.

TABLE X-7—SUMMARY OF COSTS AND BENEFITS FOR MY 2029 BY ALTERNATIVE, DISCOUNTED AT 3% (RELATIVE TO BASELINE 1b), METHOD Aa

Vehicle segment	Alt 2	Alt 3	Alt 4	Alt 5
<b>Total Costs (\$billion)</b>				
HD pickups and Vans .....	0.3	0.8	0.9	1.1
Vocational Vehicles .....	0.3	1.5	1.5	2.9
Tractors/Trailers .....	1.2	1.9	1.9	3.9
Total .....	1.9	4.1	4.3	7.9
<b>Total Benefits (\$billion)</b>				
HD pickups and Vans .....	1.9	3.6	3.8	4.2
Vocational Vehicles .....	1.8	5.2	5.2	7.3
Tractors/Trailers .....	14.4	25.4	25.4	32.0
Total .....	18.0	34.1	34.4	43.6
<b>Net Benefits (\$billion)</b>				
HD pickups and Vans .....	1.5	2.8	2.9	3.1
Vocational Vehicles .....	1.4	3.7	3.7	4.4
Tractors/Trailers .....	13.2	23.5	23.5	28.1
Total .....	16.1	30.0	30.1	35.6

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

## (2) Method B Tables

TABLE X-8—ANNUAL GHG AND FUEL REDUCTIONS IN 2035 AND 2050 USING METHOD B AND RELATIVE TO THE LESS DYNAMIC BASELINE <sup>a</sup>

	Upstream & downstream GHG reductions (MMT)		Fuel reductions (billion gallons)	
	2035	2050	2035	2050
Alt. 2 Less Stringent—Total .....	72	101	5.2	7.3
Tractors and Trailers .....	59	84	4.2	6.0
HD Pickup Trucks .....	8	11	0.7	0.9
Vocational Vehicles .....	5	7	0.3	0.5
Alt. 3 Preferred—Total .....	127	183	9.3	13.4
Tractors and Trailers .....	97	141	7.0	10.1
HD Pickup Trucks .....	14	19	1.1	1.6
Vocational Vehicles .....	16	23	1.2	1.7
Alt. 4 More Stringent—Total .....	132	184	9.7	13.5
Tractors and Trailers .....	100	141	7.2	10.1
HD Pickup Trucks .....	15	19	1.2	1.6
Vocational Vehicles .....	17	23	1.3	1.7
Alt. 5 More Stringent—Total .....	168	232	12.4	17.0
Tractors and Trailers .....	126	176	9.0	12.6
HD Pickup Trucks .....	17	22	1.4	1.8
Vocational Vehicles .....	26	34	1.9	2.5

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE X-9—BENEFIT &amp; COST COMPARISON FOR EACH ALTERNATIVE USING METHOD B AND RELATIVE TO LESS DYNAMIC BASELINE

[Monetary values in billions of 2012\$, GHG reductions in million metric tons]<sup>a</sup>

	Benefit-cost category	Alt 2	Alt 3	Alt 4	Alt 5
2035	Vehicle program .....	–\$2.6	–\$5.9	–\$6.2	N/A
	Maintenance .....	–\$0.06	–\$0.13	–\$0.14	N/A
	Fuel (pre-tax) .....	\$20.9	\$37.2	\$38.7	\$49.4
	Benefits .....	\$12.8	\$20.5	\$21.1	\$26.3
	Net benefits .....	\$31.1	\$51.7	\$53.5	N/A

TABLE X-9—BENEFIT &amp; COST COMPARISON FOR EACH ALTERNATIVE USING METHOD B AND RELATIVE TO LESS DYNAMIC BASELINE—Continued

[Monetary values in billions of 2012\$, GHG reductions in million metric tons]<sup>a</sup>

	Benefit-cost category	Alt 2	Alt 3	Alt 4	Alt 5
2050	GHG reductions (MMT) .....	71.9	127.1	132.0	168.3
	Vehicle program .....	–\$3.1	–\$7.0	–\$7.4	N/A
	Maintenance .....	–\$0.06	–\$0.13	–\$0.14	N/A
	Fuel (pre-tax) .....	\$31.5	\$57.5	\$57.6	\$72.7
	Benefits .....	\$19.9	\$32.9	\$32.9	\$40.6
NPV, 3%	Net benefits .....	\$48.3	\$83.2	\$83.0	N/A
	GHG reductions (MMT) .....	101.2	183.4	183.8	231.8
	Vehicle program .....	–\$39.8	–\$86.8	–\$98.6	N/A
	Maintenance .....	–\$0.88	–\$1.80	–\$1.91	N/A
	Fuel (pre-tax) .....	\$280.0	\$495.6	\$517.6	\$664.3
NPV, 7%	Benefits .....	\$175.2	\$279.7	\$289.7	\$361.5
	Net benefits .....	\$414.5	\$686.8	\$706.8	N/A
	Vehicle program .....	–\$19.3	–\$41.1	–\$48.4	N/A
	Maintenance .....	–\$0.42	–\$0.86	–\$0.92	N/A
	Fuel (pre-tax) .....	\$118.1	\$206.7	\$219.0	\$283.0
	Benefits .....	\$105.5	\$173.5	\$180.7	\$228.0
	Net benefits .....	\$203.8	\$338.1	\$350.5	N/A

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE X-10—BENEFIT &amp; COST COMPARISON FOR EACH ALTERNATIVE USING METHOD B AND RELATIVE TO LESS DYNAMIC BASELINE HD PICKUP AND VANS ONLY

[Monetary values in billions of 2012\$, GHG reductions in million metric tons]<sup>a</sup>

	Benefit-cost category	Alt 2	Alt 3	Alt 4	Alt 5
2035	Vehicle program .....	–\$0.5	–\$0.9	–\$1.2	N/A
	Maintenance .....	–\$0.01	–\$0.01	–\$0.01	N/A
	Fuel (pre-tax) .....	\$2.5	\$4.2	\$4.4	\$5.0
	Benefits .....	\$1.4	\$2.2	\$2.3	\$2.6
	Net benefits .....	\$3.4	\$5.5	\$5.5	N/A
2050	GHG reductions (MMT) .....	8.1	13.9	14.6	16.6
	Vehicle program .....	–\$0.5	–\$1.0	–\$1.4	N/A
	Maintenance .....	–\$0.01	–\$0.01	–\$0.01	N/A
	Fuel (pre-tax) .....	\$3.5	\$6.3	\$6.3	\$7.2
	Benefits .....	\$2.1	\$3.5	\$3.5	\$4.0
NPV, 3%	Net benefits .....	\$5.1	\$8.7	\$8.4	N/A
	GHG reductions (MMT) .....	10.8	19.3	19.4	22.1
	Vehicle program .....	–\$7.5	–\$13.5	–\$19.6	N/A
	Maintenance .....	–\$0.18	–\$0.18	–\$0.18	N/A
	Fuel (pre-tax) .....	\$31.4	\$53.5	\$56.8	\$64.9
NPV, 7%	Benefits .....	\$18.7	\$29.2	\$30.7	\$34.6
	Net benefits .....	\$42.4	\$69.1	\$67.7	N/A
	Vehicle program .....	–\$3.7	–\$6.5	–\$9.7	N/A
	Maintenance .....	–\$0.08	–\$0.08	–\$0.08	N/A
	Fuel (pre-tax) .....	\$13.1	\$21.9	\$23.7	\$27.1
	Benefits .....	\$11.4	\$18.2	\$19.3	\$21.8
	Net benefits .....	\$20.7	\$33.5	\$33.2	N/A

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE X-11—BENEFIT &amp; COST COMPARISON FOR EACH ALTERNATIVE USING METHOD B AND RELATIVE TO LESS DYNAMIC BASELINE VOCATIONAL VEHICLES ONLY

[Monetary values in billions of 2012\$, GHG reductions in million metric tons]<sup>a</sup>

	Benefit-cost category	Alt 2	Alt 3	Alt 4	Alt 5
2035	Vehicle program .....	–\$0.2	–\$2.1	–\$2.1	N/A
	Maintenance .....	–\$0.02	–\$0.03	–\$0.04	N/A
	Fuel (pre-tax) .....	\$1.3	\$4.7	\$5.1	\$7.6
	Benefits .....	\$1.1	\$2.6	\$2.8	\$3.9

TABLE X-11—BENEFIT &amp; COST COMPARISON FOR EACH ALTERNATIVE USING METHOD B AND RELATIVE TO LESS DYNAMIC BASELINE VOCATIONAL VEHICLES ONLY—Continued

[Monetary values in billions of 2012\$, GHG reductions in million metric tons]<sup>a</sup>

	Benefit-cost category	Alt 2	Alt 3	Alt 4	Alt 5
2050	Net benefits .....	\$2.2	\$5.2	\$5.8	.....
	GHG reductions (MMT) .....	4.7	16.1	17.4	25.8
	Vehicle program .....	–\$0.3	–\$2.4	–\$2.4	N/A
	Maintenance .....	–\$0.02	–\$0.03	–\$0.04	N/A
	Fuel (pre-tax) .....	\$2.0	\$7.3	\$7.3	\$10.7
NPV, 3%	Benefits .....	\$1.7	\$4.2	\$4.2	\$5.9
	Net benefits .....	\$3.4	\$9.0	\$9.1	N/A
	GHG reductions (MMT) .....	6.5	23.2	23.3	33.9
	Vehicle program .....	–\$3.6	–\$29.6	–\$32.8	N/A
	Maintenance .....	–\$0.22	–\$0.42	–\$0.52	N/A
NPV, 7%	Fuel (pre-tax) .....	\$16.9	\$60.6	\$66.3	\$99.9
	Benefits .....	\$14.8	\$34.8	\$37.4	\$52.7
	Net benefits .....	\$27.9	\$65.4	\$70.3	N/A
	Vehicle program .....	–\$1.7	–\$13.8	–\$16.0	N/A
	Maintenance .....	–\$0.10	–\$0.19	–\$0.24	N/A
	Fuel (pre-tax) .....	\$6.9	\$24.7	\$27.9	\$42.5
	Benefits .....	\$8.3	\$21.5	\$23.4	\$33.8
	Net benefits .....	\$13.4	\$32.2	\$35.0	N/A

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

TABLE X-12—BENEFIT &amp; COST COMPARISON FOR EACH ALTERNATIVE USING METHOD B AND RELATIVE TO LESS DYNAMIC BASELINE TRACTOR/TRAILERS ONLY

[Monetary values in billions of 2012\$, GHG reductions in million metric tons]<sup>a</sup>

	Benefit-cost category	Alt 2	Alt 3	Alt 4	Alt 5
2035	Vehicle program .....	–\$1.9	–\$2.9	–\$2.9	N/A
	Maintenance .....	–\$0.03	–\$0.08	–\$0.08	N/A
	Fuel (pre-tax) .....	\$17.2	\$28.4	\$29.2	\$36.8
	Benefits .....	\$10.3	\$15.7	\$16.0	\$19.7
	Net benefits .....	\$25.6	\$41.0	\$42.2	N/A
2050	GHG reductions (MMT) .....	59.1	97.2	100.0	125.9
	Vehicle program .....	–\$2.3	–\$3.6	–\$3.6	N/A
	Maintenance .....	–\$0.03	–\$0.08	–\$0.08	N/A
	Fuel (pre-tax) .....	\$26.1	\$44.0	\$44.0	\$54.8
	Benefits .....	\$16.1	\$25.2	\$25.2	\$30.7
NPV, 3%	Net benefits .....	\$39.9	\$65.5	\$65.6	N/A
	GHG reductions (MMT) .....	83.8	140.9	141.1	175.7
	Vehicle program .....	–\$28.8	–\$43.7	–\$46.2	N/A
	Maintenance .....	–\$0.47	–\$1.19	–\$1.22	N/A
	Fuel (pre-tax) .....	\$231.7	\$381.5	\$394.5	\$499.5
NPV, 7%	Benefits .....	\$141.7	\$215.7	\$221.6	\$274.2
	Net benefits .....	\$344.1	\$552.3	\$568.8	N/A
	Vehicle program .....	–\$13.9	–\$20.9	–\$22.7	N/A
	Maintenance .....	–\$0.23	–\$0.59	–\$0.60	N/A
	Fuel (pre-tax) .....	\$98.1	\$160.1	\$167.5	\$213.4
	Benefits .....	\$85.8	\$133.8	\$138.1	\$172.4
	Net benefits .....	\$169.8	\$272.4	\$282.3	N/A

**Note:**

<sup>a</sup>For an explanation of analytical Methods A and B, please see Section I.D; for an explanation of the less dynamic baseline, 1a, and more dynamic baseline, 1b, please see Section X.A.1.

**XI. Natural Gas Vehicles and Engines**

Both gasoline and diesel vehicles can be designed or modified to use natural gas. NGV America estimates that approximately 0.5 percent of the heavy-duty vehicle fleet use natural gas. A small but growing number of medium

and heavy-duty natural gas vehicles have been produced and are in current use. Although these natural gas versions are similar in many ways to their petroleum counterparts, there are significant differences. There are also both similarities and differences in the

production and distribution of natural gas relative to gasoline and diesel fuel.

This combined rulemaking by EPA and NHTSA is designed to regulate two separate characteristics of heavy duty vehicles: Emissions of GHGs and fuel consumption. The use of natural gas as

a heavy-duty fuel can impact both of these. In the case of diesel or gasoline powered vehicles, there is a close relationship between these two characteristics. For natural gas fueled vehicles, which reduce or eliminate the use of petroleum, the situation is different. For example, a natural gas vehicle that achieves approximately the same fuel efficiency as a diesel powered vehicle would emit about 20 percent less CO<sub>2</sub> when operating on natural gas; and a natural gas vehicle with the same fuel efficiency as a gasoline vehicle would emit about 30 percent less CO<sub>2</sub>. In Phase 1, the agencies balanced these facts by applying the gasoline and diesel CO<sub>2</sub> standards to natural gas engines based on the engine type of the natural gas engine. Fuel consumption for these vehicles is then calculated according to their tailpipe CO<sub>2</sub> emissions. In essence, this applies a one-to-one relationship between fuel efficiency and tailpipe CO<sub>2</sub> emissions for all vehicles, including natural gas vehicles. The agencies determined that this approach would likely create a small balanced incentive for natural gas use. See 76 FR 57123; see also 77 FR 51705 (August 24, 2012) and 77 FR 51500 (August 27, 2012) (EPA and NHTSA, respectively, further elaborating on basis for having Phase 1 apply at the tailpipe only, including for alternative fueled vehicles); see also *Delta Construction Co. v. EPA*, 783 F. 3d 1291 (D.C. Cir. 2015) U.S. App. LEXIS 6780, F.3d (D.C. Cir. April 24, 2015) (dismissing challenge to Phase 1 GHG standards as being arbitrary for applying only on a tailpipe basis).

For Phase 2, the agencies have reevaluated the potential use of natural gas in the heavy-duty sector and the impacts of such use. As discussed below, based on our review of the literature and external projections we believe that the use of natural gas is unlikely to become a major fuel source for medium and heavy-duty vehicles during the Phase 2 time frame. Thus, since we project natural gas vehicles to have little impact on both overall GHG emissions and fuel consumption during the Phase 2 time frame, the agencies see no need to propose fundamental changes to the Phase 1 approach for natural gas engines and vehicles.

In the following sections, we present a lifecycle analysis of natural gas used by the heavy-duty truck sector. We also present the results of an analysis by the Energy Information Administration projecting the future use of natural gas by heavy-duty trucks. Finally, we list a number of potential technologies and discuss the approaches that could be pursued help to reduce the methane emissions from natural gas trucks. A

more detailed discussion of these analyses and issues can be found in the draft RIA.

#### *A. Natural Gas Engine and Vehicle Technology*

Several engine parameters and characteristics come into play in comparing engines powered by natural gas with engines powered by conventional fuels.

Gasoline-fueled engines are typically spark-ignition engines that rely on stoichiometric combustion, which means that essentially all the oxygen from the engine's intake air is consumed in the combustion process. Converting a gasoline-fueled engine to run on natural gas involves changing the hardware used to store and deliver fuel to the engine, but the combustion strategy remains largely unchanged. The engine must be recalibrated for the different fuel properties, but combustion remains stoichiometric. In addition, the catalysts may require significant changes to enable the heavy-duty engine to comply with the emission standards.

Diesel-fueled engines are compression-ignition engines that rely on lean-burn combustion, which means that the engine takes in a substantial quantity of excess air (oxygen) that is not consumed in the combustion process. Engines usually have turbochargers to compress the intake air, which allows for greater power output and thermodynamic efficiency. Converting a diesel-fueled engine to run on natural gas may involve a minimal set of changes to engine calibrations to maintain lean-burn operation and the overall operating characteristics of a compression-ignition engine, although there would be substantial changes to the fuel storage and delivery systems. This could require the use of a pilot injection of a small amount of diesel fuel to initiate the combustion event, or more commonly, a mixture (never more than 50 percent natural gas) of natural gas and diesel fuel is combusted. It is also possible to convert a diesel-fueled engine to run on natural gas by adding a spark plug and changing the calibration strategy to rely on stoichiometric combustion. This allows for simpler engine design and operation, but comes at a cost of higher fuel consumption and CO<sub>2</sub> emissions.

Engines running on natural gas are capable of meeting the same criteria and GHG emission standards that apply for gasoline and diesel engines. In the case of reducing PM and CO<sub>2</sub> emissions, there is an inherent advantage for natural gas. In contrast, engines must be properly calibrated and maintained to

avoid high emission rates for NO<sub>x</sub>, HC, and CO.

On-vehicle fuel storage for natural gas is also an important design parameter. The most common method today is compressed natural gas (CNG), which involves storing the fuel as a gas at very high pressure (up to ~3500 psi) to increase the density of the fuel. This increases vehicle weight and generally reduces the range relative to gasoline or diesel vehicles, but the technology is readily available and does not involve big changes for operators. The alternative is to cool the fuel so that it can be stored as liquefied natural gas (LNG), which involves more extensive hardware changes for managing the fuel as a cryogenic liquid. LNG fuel storage also involves a substantial weight increase, but LNG has a higher density than CNG so LNG vehicles can store much more fuel than CNG vehicles in the same volume. LNG technology is available for a limited number of truck models, mostly for line-haul service where range is a paramount consideration. The cryogenic fuel requires substantial changes in hardware and procedures for refueling stations and operators. An additional factor in considering LNG technology is that a parked vehicle could vent the fuel as it takes on heat from the surrounding environment over a period of several days.

#### *B. GHG Lifecycle Analysis for Natural Gas Vehicles*

This section is organized into three sections. The first section summarizes the upstream emissions. The second section summarizes the downstream emissions. The last section summarizes the results of the lifecycle emissions and provides a comparison between natural gas lifecycle and diesel fuel lifecycle emissions. Only the overall results of the lifecycle emissions comparison between natural gas and diesel fuel are presented here, much more detail is provided in Chapter 13 of the DRIA.

##### *(1) Upstream Emissions*

Upstream methane emissions, occurring in the natural gas production, natural gas processing, transmission, storage and distribution stages of natural gas production, are estimated and summarized in the annual EPA report Inventory of U.S. Greenhouse Gas Emissions and Sinks (GHG Inventory) for the United Nations Framework Convention on Climate Change (UNFCCC). As a basis for estimating the life-cycle impact of natural gas use by heavy-duty trucks, we used the year 2012 methane emission estimates in the most recent GHG Inventory, published



in 2014. The GHG Inventory also includes the quantity of carbon dioxide which is coproduced with methane throughout the natural gas system and emitted to the atmosphere through venting, flaring, and as fugitive emissions.

The GHG Inventory is updated annually to account for new emission sources (*e.g.*, new natural gas wells), updated data, emission factors and/or methodologies, and to account for changes in emissions due to policy changes, regulatory changes and changes in industry practices. The GHG Inventory reflects emission reductions due to existing state regulations, National Emission Standards for Hazardous Air Pollutants (NESHAP) promulgated by EPA in 1999, the New Source Performance Standards (NSPS) promulgated by EPA in 2012,<sup>793</sup> and Natural Gas Star (a flexible, voluntary partnership that encourages oil and natural gas companies to adopt proven, cost-effective technologies and practices that improve operational efficiency and reduce methane emissions).<sup>794</sup>

Emission estimates in the GHG Inventory are generally bottom-up estimates which are per-unit (compressor, pneumatic valve, etc.) emission estimates based on measured or calculated emission rates from such emission sources.

In addition to the national-level data available through the GHG Inventory, facility-level petroleum and natural gas systems data are also available through EPA's Greenhouse Gas Reporting Program (GHGRP). This data represents a significant step forward in understanding GHG emissions from this sector and EPA expects that this data will be an important tool for the agency and the public to analyze emissions, and understand emission trends. For some sources, EPA has already used GHGRP data to update emission estimates in the GHG inventory, and EPA plans to continue to leverage GHGRP data to update future GHG Inventories.

The EPA-promulgated 2012 New Source Performance Standards (NSPS) will reduce emissions of ozone precursors from natural gas facilities and have methane and hazardous air pollutant reduction co-benefits. The NSPS standards require that natural gas wells which are hydraulically fractured control emissions using flaring or reduced emission completion (REC)

technology from completions and workovers starting in 2012. RECs used by natural gas well drillers capture the natural gas emissions that occur during well completion, instead of venting or flaring the emissions. Starting January 2015, RECs are required for natural gas well completions and workovers. The NSPS also regulates the emissions from certain new natural gas production equipment, including dehydrator vents and condensate tanks. In the 2013 Climate Action Plan, EPA projects future emissions of methane to increase modestly, by about 4 percent between now and 2025. As estimated for the recent power plant proposed rulemaking, natural gas production is expected to increase by about 20 percent during this timeframe, thus, methane emissions in 2025 are expected to be 14 percent lower than in 2012 based on an equivalent volume of natural gas being produced. As announced by the White House, EPA will further regulate methane emissions from new natural gas production facilities.<sup>795 796</sup>

In the GHG Inventory, emissions associated with powering the units or equipment (*i.e.*, compressors, pumps) used in natural gas production, processing, transmission and distribution are aggregated with all the other fossil fuel combustion activities. Rather than attempt to disaggregate those specific GHG emissions from the rest of the process emissions in the GHG Inventory, we instead used the estimated emissions for these sources provided by GREET.

## (2) Downstream Emissions

Natural gas can be used by vehicles either as a compressed gas (CNG) or as liquefied natural gas (LNG). We discuss the emissions of both below.

### (a) Compressed Natural Gas (CNG)

The natural gas that comprises CNG is typically off-loaded from the natural gas system where the vehicles using CNG are refueled. This is because the natural gas used as CNG is compressed at the retail stations that sell the CNG and the fleet facilities which fuel the CNG fleet vehicles. To get the natural gas to the CNG retail facilities which are mostly located in or near urban areas, the natural gas is expected to be shipped through the distribution system downstream of the natural gas

transmission system. CNG trucks are then refueled at the retail stations providing CNG. Each time a CNG refueling event occurs, a small amount of natural gas is released to the environment. Because of a lack of data or an estimate by GREET or CARB, this small amount of natural gas has not been estimated and therefore are not included in the lifecycle analysis presented here. Since these systems are designed to have no leaks, the CNG could remain stored in the CNG tanks indefinitely. However, the very high pressure at which CNG is stored dramatically increases fugitive emissions if a fitting were to develop a leak. The level of fugitive emissions for a certain sized hole is directly proportional to the pressure. We do not have any data on the fugitive emissions from CNG trucks. In our lifecycle analysis, we assume that CNG fugitive emissions are zero, which likely underestimates the methane emissions.

When CNG is stored at high pressure (*i.e.*, 3600 psi) it contains only about 25 percent the energy density of diesel fuel. This low fuel storage density is a disincentive for using CNG in long haul trucks. An adsorbent for natural gas (ANG),<sup>797</sup> called metal organic framework (MOF) for storing CNG, has been invented and is being tested for large scale use. The technology involves filling the CNG tank with a specially designed substance that looks similar to a pelletized catalyst. The substance establishes a matrix which causes the methane molecules to become better organized and store the same quantity of natural gas in a smaller volume at the same pressure (about 60 percent of the energy density of diesel fuel), or store the same density of natural gas at a lower pressure. This MOF could improve the energy density of CNG which would make it a better candidate for natural gas storage for long range combination trucks. Or, if used to store CNG at the same density, could reduce the compression energy required to compress the CNG since it could be stored at a lower pressure.

### (b) Liquefied Natural Gas (LNG)

A primary reason for liquefying natural gas is that it allows storing the natural gas at about 60 percent of the density of diesel fuel. For this reason, LNG is a primary fuel being considered by long haul trucks.

<sup>793</sup> Oil and Natural Gas Sector: New Source Performance Standards and National Emission Standards for Hazardous Air Pollutants Reviews; Final Rule, 40 CFR parts 60 and 63, Environmental Protection Agency, August 16, 2012.

<sup>794</sup> [www.epa.gov/gasstar/](http://www.epa.gov/gasstar/).

<sup>795</sup> FACT SHEET: Administration Takes Steps Forward on Climate Action Plan Announcing Actions to Cut Methane Emissions, The White House, January 14, 2015.

<sup>796</sup> FACT SHEET; EPA's Strategy for Reducing Methane and Ozone-Forming Pollution from the Oil and Natural Gas Industry; Environmental Protection Agency, January 14, 2015.

<sup>797</sup> Menon, V.C., Komarneni, S. 1998 "Porous Adsorbents for Vehicular Natural Gas Storage: A Review", *Journal of Porous Materials* 5, 43–58 (1998); Burchell, T "Carbon Fiber Composite Adsorbent Media for Low Pressure Natural Gas Storage" Oak Ridge National Laboratory.

The first step downstream of the natural gas production, processing and distribution system for making LNG available to trucks is the liquefaction step. This step involves the removal of heat from the natural gas until it undergoes a phase change from a gas to a liquid at a low pressure. LNG plants are configured depending on their ultimate capacity. World class LNG plants produce 5 million metric tons, or more, per year of LNG and the economy of scale of these large plants supports the significant addition of capital to reduce their operating costs and energy use. An LNG plant solely producing LNG for truck fuel is expected to be significantly smaller than the world class LNG export plants with a poorer economy of scale. Their energy efficiency would be expected to be much lower on a percentage basis. The California Air Resources Board estimates the liquefaction plants used for producing truck LNG fuel are 80 percent efficient, compared to 90 percent efficient for world class LNG plants.<sup>798</sup> In our lifecycle analysis of LNG as a truck fuel, we also assumed that LNG plants are 80 percent efficient. The LNG producer is not only responsible for the LNG fugitive emissions at the plant, but it is also responsible for the GHG and other process emissions emitted when liquefying the natural gas. Because LNG plants are located separate from the retail facilities, they can be located to access the lowest cost feedstock. This means the natural gas for LNG can be sourced from the larger natural gas transmission pipelines which are upstream of the distribution pipelines. Once the natural gas is liquefied at the liquefaction plant, it is stored in an insulated storage tank to keep the LNG liquefied.

To transport the LNG to the retail station, the LNG is loaded into an insulated horizontal trailer designed specifically for transporting LNG. If the LNG in the truck trailer were to warm sufficiently to cause the LNG to reach the pressure relief valve venting pressure, there would be boil-off emissions from the truck trailer. However, since the LNG is super cooled, boil off events are likely to be rare. We did not have access to any specific data to estimate these emissions so we used a CARB estimate of boil-off emissions for LNG transportation by the tanker

truck between the LNG plant and retail outlets.<sup>799</sup>

LNG is stored in an insulated storage tank at the retail facility. Heat gain in the storage tank could eventually lead to boil-off emissions. Service stations with little LNG demand are at a higher risk of boil-off emissions compared to service stations which have a significant throughput volume. LNG stations could be configured to avoid boil-off events to the atmosphere, such as venting to a co-located CNG facility, or venting to a nearby natural gas pipeline. We did not have access to any specific data to estimate these emissions so we used a CARB emission estimates for the boil-off emissions from LNG retail facilities.<sup>800</sup>

Vehicles requiring LNG fuel drive up to an LNG retail outlet or fleet refueling facility and fill up with LNG fuel. When the refueling nozzle is disconnected from the LNG tank nozzle, a small amount of methane is released to the environment. In addition, it may be necessary prior to refueling, due to high pressure in the truck's LNG tank, to reduce the pressure in the truck's LNG tank to speed up the refueling process. In some cases the retail station is equipped with another hose and associated piping to vent the excess gas to the retail stations' storage tank where it would usually condense back to a liquid due to the lower temperature of that tank, or perhaps be vented to a natural gas pipeline. However, for those retail outlets without such vent lines to the storage tank, the truck driver may simply vent the truck's storage tank to the atmosphere. As part of a sensitivity analysis for our lifecycle analysis, we estimate the emissions for venting an LNG tank prior to refueling.

#### (c) Comparing CNG to LNG

There is an important difference in providing CNG and LNG which is important to highlight. For making CNG available to trucks, only a single facility, the retail outlet, is required for distributing CNG, while LNG requires both a liquefaction plant and a retail outlet and a means for transporting the LNG from the liquefaction plant to retail. Relying on a single facility simplifies the logistics of providing CNG and reduces the opportunity for methane leakage to the environment. However, this emissions disadvantage of LNG compared to CNG is offset somewhat because LNG is expected to access the lower priced natural gas from the upstream transmission system, therefore, the methane emissions

associated with the downstream natural gas distribution system are avoided.

#### (d) Vehicle Emissions

There are several different ways that diesel heavy duty engines can be configured to use natural gas as a fuel. The first is a spark ignition natural gas (SING), Otto cycle SING heavy duty engine burns the fuel stoichiometrically and uses a three-way catalyst, and some also add an oxidation catalyst to provide the greatest emissions reduction. In this case the engine compression ratio is reduced similar to that of a gasoline engine and thus its thermal efficiency is lower than a diesel-like engine by about 10–15 percent.

The second is a direct injection natural gas (DING), diesel cycle. The DING engine uses a small quantity of diesel fuel (pilot injection) or a glow plug as ignition sources. As the injection system for the diesel fuel does not have the capability of greater injection quantities, this option has no dual-fuel properties. On the other hand, an optimization of the pilot injection can be made to achieve lower emissions. An advanced high pressure direct injection (HPDI) fuel system combining the injection of both diesel fuel and natural gas can be used for lean burn combustion. This enables the engine to maintain the efficiency advantage of a compression ignition engine while running mainly CNG/LNG.

The third is a mixed-fuel natural gas (MFNG), diesel cycle. In a mixed-fuel engine, natural gas is mixed with intake air before induction to the cylinder and diesel fuel is used as ignition source. Mixed-fuel vehicle/engine means any vehicle/engine engineered and designed to be operated on the original fuel(s), or a mixture of two or more fuels that are combusted together. Engine results showed that the efficiency of the engine could decrease by about 2–5 percent in mixed-fuel mode compared to diesel mode and that the diesel replacement was approximately 40–60 percent.

Each of these natural gas engine types has its merits. The SING engine is less costly, but is less fuel efficient and because of the lower compression ratio it has less torque than the two diesel cycle engines. The DING engine is likely the most expensive because of the special natural gas/diesel fuel injection system and large required amount of natural gas (LNG or CNG) storage since the truck must run on natural gas. However, because the truck can run almost completely on natural gas, the DING engine has the potential to more quickly pay down the higher investment cost of the natural gas truck. The MFNG engine provides the truck owner the

<sup>798</sup> Detailed California-Modified GREET Pathway for Liquid Natural Gas (LNG) from North American and Remote Natural Gas Sources, Version 1.0, California Air Resources Board, July 20, 2009.

<sup>799</sup> Ibid.

<sup>800</sup> Ibid.

flexibility to operate on natural gas or diesel fuel, but at the expense of a slower natural gas investment pay down rate because it can operate at most 50 percent of the time on natural gas.

When assessing the methane emissions from both CNG and LNG trucks, it is important to separate those trucks built or converted before 2014 to those built or converted in 2014 and later. The trucks built before 2014 only needed to meet a nonmethane hydrocarbon (NMHC) standard, which means that the methane emissions from these trucks are unregulated. Our certification data show that the methane tailpipe emissions from these trucks/buses ranges from 2–5 g/bhp-hr for both spark ignition (gasoline type) and compression ignition (diesel type) engines.

For 2014 and later OEM compression ignition natural gas trucks or natural gas conversions of 2014 and later diesel trucks, the trucks must meet a 0.1 g/bhp-hr methane emission standard in the case of a larger truck engine tested with an engine dynamometer, and a 0.05 g/mile methane emission standard in the case of smaller trucks tested on a chassis dynamometer. For spark ignition (gasoline style) engines, the standards take effect in 2016.<sup>801</sup> Natural gas truck manufacturers are allowed to offset methane emissions exceeding the methane emission standard by converting the methane emission exceedances into CO<sub>2</sub> equivalent emissions and using CO<sub>2</sub> credits. For the initial natural gas engine certifications that EPA received for 2014, the truck manufacturers chose to continue to emit high levels of methane (around 2 g/bhp-hr) and use carbon dioxide credits to offset those emissions. We don't know if this practice of will continue in the future, however, for evaluating the lifecycle impacts of natural gas heavy-duty trucks, the 2014 and later natural gas heavy-duty trucks may in fact have an emissions profile more like the pre-2014 trucks and not like the 2014 and later trucks as depicted below in the figures. It is worth noting that the potential exists for deterioration or malfunction of the engines, fuel supplies, or associated emission control devices on these trucks to occur in such a manner to result in higher methane emissions in actual use. We have not specifically accounted for the potential for increased methane emissions caused from high emitter natural gas trucks. See generally Section II above.

The crankcase of these engines receives leakage from across the piston rings, which can contain methane. The crankcase of the spark ignition engines is normally vented into the intake of the engines, thus, any methane emissions from the crankcase which is not combusted in the engine would be accounted for in the tailpipe emissions. For compression ignition engines, however, the crankcase emissions are allowed to be vented into the exhaust pipe downstream of the aftertreatment devices, and therefore the crankcase emissions are released to the atmosphere even though they are included in the emissions test for the Methane standard that was introduced in Phase 1 on the rule. Another potential source of methane emissions from CNG and LNG trucks is fugitive emissions from the engine and the piping which routes the fuel to the engine. Thus, either while parked or operated, this part of the vehicle fuel and engine systems could leak methane to the environment (which is different from boil-off emissions from LNG trucks discussed below). We do not have data nor did we develop an estimate for these potential fugitive emissions from these types of in-use leaks. If the natural gas vehicles are well maintained, these emissions are likely to be very low.

The thermal efficiency (the ratio of energy converted to work versus energy consumed) of the natural gas engine also plays a role in the lifecycle emissions of the truck. Natural gas engines are generally less efficient than their gasoline and diesel counterparts. Furthermore, manufacturers choose to produce spark-ignition stoichiometric natural gas engines for use in diesel applications. Spark-ignition natural gas engines can be as much as 15 percent less efficient than compressed ignition engines which operate on diesel fuel. In our lifecycle analysis, we provide two different sensitivities for natural gas vehicles assuming that they may be 5 percent and 15 percent less efficient.

An important difference between CNG and LNG is way in which the fuels are stored on the vehicle. The CNG is contained in a sealed system while the LNG system is ultimately open to the environment. Providing that there are no leaks in the storage system, the CNG truck is inherently low (zero) emitting and a parked truck would contain the CNG indefinitely. An LNG truck is inherently high emitting since if the truck were to be parked long enough its entire contents would be emitted to the environment.

Thus, a major GHG issue for LNG trucks is boil-off emissions from the truck's fuel storage systems. When the

liquefied natural gas is pumped into the truck LNG tanks, it is "supercooled," meaning that the pressure of the LNG is well below the pressure at which the natural gas vent valve would relieve the LNG pressure. If the truck is driven extensively, the drawdown of liquid level will cause a vacuum which will cause some of the fuel to boil off and the heat of vaporization would thus cool the rest of the liquid in the LNG storage tank. It is possible that the fuel would maintain its supercooled temperature, or possibly even cool further below its supercooled temperature, the entire time until the LNG is completely consumed.

If the truck is not driven at all or is driven very little, the very low temperature and low pressure LNG warms due to the ambient temperature gradient through the tank wall, and vaporizes, causing the temperature and pressure of the LNG to rise. When the pressure reaches a maximum of 230 psi a safety release valve releases the methane gas to vent excess pressure. There are two industry standards used to design tanks to reduce the temperature increase, one for a 3 day hold time<sup>802</sup> and one for a 5 day hold time.<sup>803</sup> Hold time is the time elapsed between the LNG refueling and venting.

If there is a boil-off event, a large amount of methane would be released. If aware of the impending boil-off, such as when the truck is being maintained, the truck driver could hook up the LNG tank to a hose which would vent the natural gas emissions to a CNG system which could reuse the boil-off natural gas as CNG, or vent the natural gas emission to a natural gas pipeline. Otherwise the boil-off emission would simply vent to the atmosphere. If the truck had 200 gallons of LNG storage capacity, the estimated quantity of boil-off emissions would range from 3 to 9 gallons of LNG for each boil off event depending on the fill level of the LNG tank. Each boil off event has the potential to release on the order of 5,300–15,800 grams of CH<sub>4</sub> which equates to 132–400K grams of CO<sub>2</sub> equivalent emissions, assuming that methane has a global warming potential (GWP) of 25 (assessed over 100 years). If the vehicle continues to sit for five more days and boil-off events occur each day to several times per day as the tank vents and rebuilds in pressure, the sum total of the boil-off events can

<sup>801</sup> See 76 FR 57192, 40 CFR 1036.108(a)(2) and 1037.104(c) (which is proposed to be redesignated as 40 CFR 86.189–14(k)(5)).

<sup>802</sup> National Fire Protection Association 52, Compressed Natural Gas (CNG) Vehicular Fuel System Code, 2002 Edition.

<sup>803</sup> SAE International (2008) SAE J2343: Recommended Practice for LNG Medium and Heavy-Duty Powered Vehicles. Warrendale, Pennsylvania.

result in over a million grams of CO<sub>2</sub>-equivalent emissions.

### (3) Results of Life Cycle Analysis


To estimate the lifecycle impact of natural gas used by heavy-duty trucks, we totaled the carbon dioxide, methane (CH<sub>4</sub>) and the nitrous oxide (N<sub>2</sub>O) emissions for the upstream and downstream portions of the natural gas system. The methane and nitrous oxide emissions are converted to carbon dioxide-equivalent emissions using the appropriate GWP conversion factors. The GWP conversion factors EPA currently uses are for a 100-year timeframe, are 25 and 298 for methane and nitrous oxide, respectively.<sup>804</sup>

To establish the impacts of natural gas use in the heavy-duty fleet, it was necessary to compare the lifecycle impacts of natural gas against the base fuel it is replacing, which is diesel fuel. The lifecycle impact of diesel fuel was

estimated by the National Energy Technology Laboratory (NETL) for the production and use of diesel fuel in 2005. EPA used this lifecycle assessment for the 2010 Renewable Fuel Standard Rulemaking and we are using this NETL diesel fuel lifecycle estimate as the reference for comparison with the natural gas lifecycle assessment. NETL is in the process of revising its lifecycle analysis of diesel fuel to 2009, which should be available sometime in 2015. According to the lead analyst, the 2009 lifecycle analysis appears to be similar in magnitude to the 2005 analysis.<sup>805</sup> However, the 2009 analysis will not capture the lifecycle effects of the large increase in hydraulically fractured crude oil (*i.e.*, Bakken, Eagle Ford) which has occurred in the U.S. during the first part of this decade.

To illustrate the relative full lifecycle impact of natural gas-fueled heavy-duty vehicles compared to diesel fueled

heavy-duty vehicles, we assessed several different scenarios. The first is a conversion of a diesel engine to use compressed natural gas. Of the tens of thousands of heavy-duty natural gas trucks currently in use, over 90 percent are of this type. These are conversions of older trucks so they are not regulated by the 2014 methane standard. For future year heavy-duty trucks, we also estimated the lifecycle emissions if the trucks were meeting a 0.1 g/bhp-hr or a 0.05 g/mile methane tailpipe standard. We provide two sensitivities to capture the lower thermal efficiencies of natural gas trucks: 5 percent less thermally efficient (thermal low) and 15 percent less energy efficient (thermal high, which is 10 percent worse thermal efficiency than the 5 percent less thermally efficient case). The relative life cycle assessment is shown in Figure XI-1.

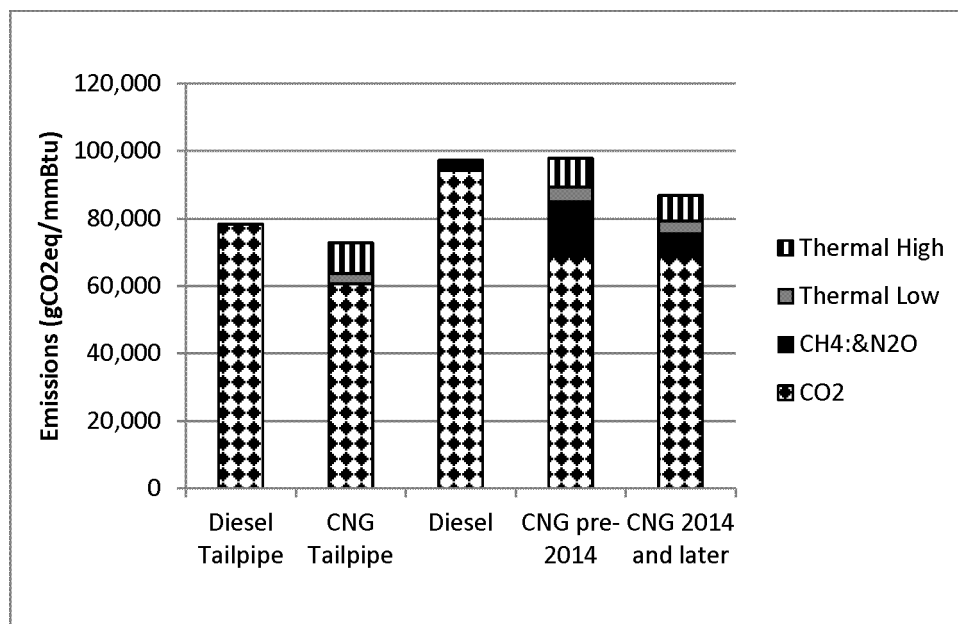

**Figure XI-1 Full Lifecycle Analysis (except tailpipe only emissions) of a CNG Truck**  
(Projected Upstream Methane Emissions in 2025, methane GWP of 25)

The first two bars of Figure XI-1 show that based solely on CO<sub>2</sub> tailpipe emissions (with and without thermal efficiency adjustments and assuming no increased methane emissions at the truck), CNG trucks are estimated to emit about 20 percent less GHG emissions than diesel engines. But this advantage decreases if the natural gas engine is

less thermally efficient. The three full lifecycle analyses represented by the right three bars in the figure show that pre-2014 CNG trucks are estimated to emit less GHG emissions as diesel trucks, although if their thermal efficiency is much lower (15 percent less than the diesel fueled engine) they could emit about the same GHG

emissions. When such trucks are complying with the 2014 and later methane emission standards, their methane emissions are much lower and these trucks are expected to be lower emitting than diesels, even if they are less thermally efficient.

The second scenario presented in Figure XI-2 is a combination LNG truck


<sup>804</sup> These global warming potential values are based on the Fourth Assessment Report authored by the Intergovernmental Panel on Climate Change.

<sup>805</sup> Conversation with Timothy J. Skone P.E., National Energy Technology Laboratory, Department of Energy, June 2014.

which in one case is assumed to be emitting methane at pre-2014 emission standards and in another case is assumed to comply with the 2014 methane standard. It is an OEM natural gas truck with a high pressure direct injection engine, and because of the extensive mileage, the truck most realistically would use LNG as a fuel to provide the necessary range for the dedicated natural gas engine. We make two different assumptions with respect

to refueling and boil off emissions. In the LNG average case, we assume a modest quantity of refueling and boil-off methane emissions which is estimated by GREET. The second boil-off emission estimate (assumed to be complying with the 2014 methane emission standard) is based on venting the LNG storage tank to the atmosphere each time the driver refills his tank, and one LNG boil-off event between each time the driver must refuel his tank. As discussed above, we

do not expect such high refueling and boil-off emissions to be common practices for newer trucks that are operated regularly. However, as the use of these trucks decreases as they age and are sold into the secondary market, the risk for refueling and boil-off emission events increases—this estimate provides a simple sensitivity emission estimate. The lifecycle assessment is shown in Figure XI-2.

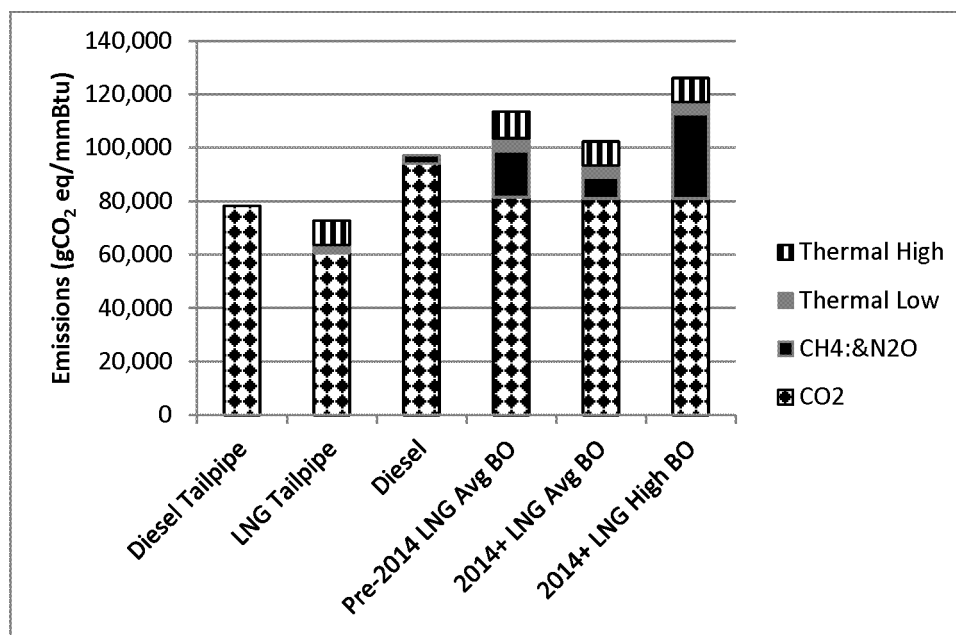

**Figure XI-2 Full Life Cycle Analysis (except tailpipe only emissions) of an LNG Truck**

**(Projected Upstream Methane Emissions in 2025, Low and High Refueling and Boil-Off Emissions, Methane GWP of 25)**

Figure XI-2 shows that LNG trucks have about the same greenhouse gas footprint as diesel trucks providing that they are complying with the methane emission standard and providing we assume a low quantity of refueling and boil-off emissions. In comparing CNG to LNG, the LNG trucks appear higher emitting than CNG trucks because of the low thermal efficiency of the small liquefaction facilities. If these LNG trucks emit high levels of methane when refueling and by experiencing boil-off events or if they emit methane at pre-2014 emission standard levels, their GHG emissions can potentially be much greater than that from diesel trucks.

It is important to point out the uncertainties associated with the lifecycle estimates provided in the above figures. As discussed above, there

is uncertainty in both the upstream and downstream methane emission estimates for natural gas facilities and equipment, and the trucks that consume natural gas. There is also uncertainty in the diesel fuel lifecycle analysis conducted by NETL. As new information becomes available, we can update our lifecycle emission estimates which would reduce the uncertainty of this analysis. A number of studies are being conducted to quantify the methane emissions (upstream and downstream) and life cycle impacts of natural gas by the Environmental Defense Fund (EDF). The final reports for these studies have not yet been released but we will review them once they are available. Finally, the lifecycle analysis is sensitive to the GWP factor used to assess methane and nitrous

oxide, and if a different GWP value were to be used, it would affect the relative lifecycle impact of natural gas relative to diesel in heavy-duty trucks (see Chapter 13 of the draft RIA for sensitivity analyses regarding upstream methane emissions and the use of different GWP factors).

We compared our lifecycle emission estimates for natural gas, relative to diesel fuel, with the estimates provided by the California Air Resources Board (CARB) for its Low Carbon Fuel Standard (LCFS). For our emissions estimate used in the comparison we used the carbon dioxide-equivalent (CO<sub>2</sub> eq) emissions estimated for 2014 and later engines, which must comply with a methane tailpipe emissions standard, and assumed that the engine was 5 percent less thermally efficient than a

comparable diesel engine. For the CARB emissions estimates, we used the estimates made for illustrative purposes using the 2013 version of the CARB GREET model as published in August, 2014.<sup>806</sup> CARB estimates that CNG engines emit 76 percent of the CO<sub>2</sub> eq emissions as a diesel truck, while our analysis estimates that CNG engines emit 81 percent of the CO<sub>2</sub> eq emissions as a diesel truck. The most likely explanation for CARB's lower estimated CO<sub>2</sub> eq emissions for CNG engines is that a much larger portion of the electricity used to compress natural gas is renewable in California than the rest of the country. CARB estimates LNG engines emit 94.5 percent of the CO<sub>2</sub> eq emissions as a diesel truck while our analysis estimates LNG trucks emit 96 percent of the CO<sub>2</sub> eq emissions as a diesel truck. CARB assumes no boil-off or venting emissions for LNG trucks and for this comparison, we used our more modest boil-off and venting assumption, as described above, which is close to CARB's. Overall, our estimates are very similar to those estimated by CARB and when there are differences, the differences are as expected.

A UC Davis report recently released estimated that CNG and LNG trucks using spark ignition engines (SING) emit about the same amount of CO<sub>2</sub> -equivalent emissions, and these emissions are slightly higher than that of diesel engines.<sup>808</sup> The HPDI engines (DING) fueled by LNG are estimated to be the lowest emitting of the several scenarios analyzed by the study. Because the study did not discuss vehicle boil-off emissions, it is likely that the study either assumed that these emissions are zero or assumed the default vehicle boil-off emission estimates made by GREET. It is likely that the study assumed that the liquefaction plants are 90 percent efficient as this is the default

assumption in GREET, which leads to lower GHG emissions by LNG trucks.

### C. Projected Use of LNG and CNG

We reviewed several sources to estimate how much natural gas is currently being used and is projected to be used by heavy-duty trucks. Projections for this emerging technology range from 7 percent of new heavy-duty vehicle sales to over 40 percent by 2040. Large uncertainties exist even since the 2014 NAS First Report was written.<sup>809</sup> Among the range of projections we assessed, that produced by the Energy Information Administration (EIA) seemed the most credible for capturing recent trends, and for projecting future natural gas use by heavy-duty trucks. There are several factors that support this assessment.

First, in its 2014 Annual Energy Outlook, EIA estimates that natural gas fueled 0.4 percent of the energy use of heavy-duty trucks in 2014. This estimate is consistent with the fraction of the heavy-duty fleet which is fueled by natural gas as estimated by the industry.<sup>810</sup> Conversely, other studies referenced by the NAS report assume that current use is already about 2 percent (the DRIA contains more discussion about these other projections).

Second, the EIA projection is based on an economic analysis which considers the increased cost of manufacturing a natural gas truck over a diesel truck, the fuel savings for using natural gas instead of diesel fuel, and whether the payback time of the fuel savings against the increased truck cost would result in purchases of natural gas trucks. As part of this analysis, EIA assumes that lighter heavy-duty trucks would use CNG, which is a lower cost technology suited for the shorter driving distances for these trucks. The long haul trucks, however, require larger on-board stores of fuel to extend the driving range which is satisfied by storing the natural gas as a liquid. LNG has about 60 percent of the energy density of diesel fuel, compared to CNG which has only 25 percent of the energy density of diesel fuel. To satisfy the long driving range of the long haul trucks, EIA assumed that they would use LNG as a fuel. The assumptions used by EIA for conducting its economic analysis all seem reasonable.

Third, EIA is one of the several organizations in the world which collects fuel pricing data and projects future fuel prices using a sophisticated modeling platform. One of the most important assumptions in projecting the future use of natural gas in the transportation sector is the relative price of natural gas to the price of diesel fuel. In 2014, the natural gas price purchased by industrial users was about \$6 per million BTU. The price of crude oil has been volatile during 2014 as the Brent crude oil price started at about \$110 per barrel, but decreased to under \$50 per barrel. From EIA's Web site, the average retail diesel fuel price in the first part of 2014 was about \$3.80 cents per gallon. When comparing the natural gas spot market price on a diesel equivalent basis to the diesel fuel price, it appears that natural gas is priced about one quarter of the diesel fuel price. However, if used as compressed natural gas, the natural gas must be distributed through smaller distribution pipeline system that exists in cities, which increases the price of the natural gas. Then the natural gas must be compressed and stored at a retail outlet, and then dispensed to CNG trucks. The estimated retail price of CNG is \$2.35 on a diesel gallon equivalent (DGE) basis, or about \$1.45 DGE less than diesel fuel. LNG plants are assumed to be located close to large transmission pipelines away from cities, thus, it is sourced from lower cost natural gas. However, for producing LNG, the natural gas must be liquefied, shipped to retail outlets, stored and then dispensed to LNG trucks. These steps add substantially to the price of the LNG and the estimated retail price of LNG is \$2.65 DGE, or \$1.15 DGE less than diesel fuel.

In its 2014 AEO projections, EIA estimates that crude oil prices in the upcoming years will decline modestly until after 2020 when they start increasing until they reach \$140/bbl in 2040. Natural gas prices are expected to only slightly increase over this period.

Fifth, the assumptions regarding payback used by EIA seemed reasonable. EIA projects that natural gas trucks begin to be purchased when the payback times are 4 years or less based on a survey conducted by the American Trucking Association. This is consistent with conversations the agencies have had with some fleet owners. Since EIA does not report the payback times as an output of its projections, it is useful to understand payback times. The 2014 NAS Phase 2 First Report cites the payback for the extra cost of natural gas trucks as 2 years, but other sources

<sup>806</sup> Low Carbon Fuel Standard Reconsideration: CA-GREET Model Update, California Air Resources Board, August 22, 2014.

<sup>807</sup> Per Anthony Alexiades of CARB: CARB is planning to propose a new draft lifecycle analysis for CNG and LNG trucks at an April 2015 public meeting. While the CNG lifecycle GHG emissions are expected to be about the same, the LNG lifecycle emissions are expected to be lower based on using a 90% efficiency for liquefaction plants instead of the 80% efficiency that CARB was using previously. Lifecycle emissions for both CNG and LNG trucks will be adjusted to be 10% higher if using a spark ignition engine to account for their lower thermal efficiency. These estimates are solely for hypothetical analyses. LCFS credits are awarded based on GHG emissions for each specific application.

<sup>808</sup> Jaffe, Amy Myers, Exploring the role of Natural Gas in U.S. Trucking, NextSTEPS Program, UC Davis Institute of Transportation Studies, February 18, 2015.

<sup>809</sup> B. Tita, Slow Going for Natural-Gas Powered Trucks; Wall Street Journal, 8/26/2014.

<sup>810</sup> NGV America estimates that there are 62,000 natural gas fueled heavy-duty trucks and buses operating in the U.S. out of a total of 12.3 million heavy-duty trucks and buses operating in the U.S., which equates to 0.5%.

report a longer return closer to 4 years.<sup>811</sup>

EPA assessed the time required for the lower fuel cost of CNG and LNG to payback the incremental truck cost of using LNG and CNG. The CNG tank plus fuel weighs on the order of four times as much as the diesel counterpart, and typically adds \$40,000–\$50,000 to the cost of a heavy-duty truck. In 2014, we estimated the payback time to be over 5 years when we assessed the payback at the higher crude oil prices at the beginning of the year. The payback rates would be even higher if we would have assessed the payback rates at the end of the year when the crude oil prices were much lower. However, for many fleets, even the payback rates at the higher crude oil prices would not be sufficiently attractive, and generally explains the low penetration of natural gas in the heavy-duty sector today. It appears that when the payoff time is longer than 4 years, few fleets are interested in purchasing natural gas trucks without subsidies to compensate for the higher purchase price of natural gas trucks. According to EIA, half the natural gas consumption by cars and trucks is in California, a state that subsidizes the purchase price of natural gas vehicles, and also subsidizes the cost of natural gas dispensing stations. The Low Carbon Fuel Standard in place in California also incentivizes natural gas use because natural gas is considered to cause less of an impact on the climate than petroleum-based gasoline and diesel fuel.<sup>812</sup> The majority of the other half of the NG fleet resides in states which subsidize the cost of using natural gas by motor vehicles.

Based on the EIA projections for crude oil and natural gas prices, the payoff time of LNG trucks is expected to remain long (more than 5 years) until sometime after 2020 when crude oil prices are projected to begin increasing. Thus, natural gas use by heavy-duty trucks is not projected by EIA to increase above 1 percent of the heavy-duty fuel demand until after 2025.

If the apparent payback time for CNG and LNG trucks use is favorable to fleet owners, fuel availability could still slow the transition to CNG and LNG. This is because CNG and LNG availability at service stations is currently 1 percent or less of the availability of gasoline and

diesel fuel and therefore not available for most fleets. LNG availability is particularly challenging because in addition to an LNG service station, a LNG liquefaction plant would be needed as well.

To the extent that natural gas displaces diesel fuel and impacts truck greenhouse gas emissions, either positive or negative, there would be little impact on overall greenhouse gas emissions because of the low natural gas truck sales that are expected to occur over the next decade. The low natural gas use by the heavy-duty sector during the Phase 2 timeframe will give us time to learn more about both upstream and downstream methane emissions to gain a better understanding of the lifecycle impacts of natural gas use by heavy-duty trucks. It will allow us more time to consider the best additional steps to take to further reduce upstream and downstream methane emissions to improve the lifecycle impacts of natural gas use by heavy-duty trucks should the heavy duty truck fleet begin consuming natural gas in much larger quantities.

#### *D. Natural Gas Emission Control Measures*

As interest in the potential use of natural gas as a heavy-duty fuel has increased, industry has begun to investigate how to improve the overall emission performance of natural gas vehicles, especially with respect to reducing methane leaks. EPA is proposing two control measures which are discussed in Section XI. There are additional items discussed in Section XI. D. (2) on which we request comment. Included in this list are several control options.

##### *(1) Proposed Control Measures*

As is discussed earlier in this preamble in Sections II and XIII. EPA is proposing some control measures to reduce potential methane emissions from natural gas vehicles. These are summarized here. Note that since these controls are being proposed to address GHG emissions rather than fuel consumption, NHTSA is not proposing equivalent requirements.

##### *(a) Proposed Closed Crankcase Requirement for NG Fueled Engines and Vehicles*

EPA is proposing to require that all natural gas engines have closed crankcases, rather than continuing the provision that allows compression-ignition engines to separately measure and account for crankcase emissions that are vented to the atmosphere. This allowance has historically been in place to account for the technical limitations

related to recirculating crankcase gases with high PM emissions back into the engine's air intake. Natural gas engines have inherently low PM emissions, so there is no technological limitation that would prevent manufacturers from closing the crankcase and recirculating all crankcase gases into the engine's air intake. The methane standard that was introduced in Phase 1 of this rule accounts for crankcase emissions, but when the system is sealed and emissions are routed to the engine intake, those emissions will be considered in determining the deterioration factor. See the Preamble Section II. D. for a description of the proposed closed crankcase requirement for natural gas fueled engines. This requirement would apply to the manufacturer responsible for criteria emission compliance: The vehicle manufacturer for complete pickups and vans, and the engine manufacturers for all other vehicles.

##### *(b) Proposal To Require 5 Day Hold Time for LNG Vehicles*

Boil-off emissions from LNG vehicles were not addressed in the Phase 1 rulemaking. As more testing has been done in this area since that time for this rising issue, as described in the Preamble Section XII, EPA is proposing to require manufacturers to follow current industry recommended practice, SAE J2343 for five day hold time to limit boil-off emissions from LNG vehicles. The specifications of this safety related standard has an effect which helps new LNG vehicles prevent boil-off. This SAE standard will only affect new LNG vehicles. It will not address aging vehicles as their insulating properties diminish such as losing vacuum over time and may eventually result in much shorter hold times.<sup>813</sup>

EPA proposes to require the certificate holder for the chassis to also comply with the proposed requirements for LNG fuel systems, but to apply the delegated assembly and secondary manufacturer allowances for these requirements. We request comment on this approach generally, as well as on:

- The need for additional requirements for manufacturers not holding certificates, such as requiring that fuel system manufacturers participate in recalls for defects in their components.
- The appropriateness of requiring or allowing separate certification of fuel

<sup>811</sup> Early LNG Adopters Experience Mixed Results; Truck News, October 1, 2013.

<sup>812</sup> CARB currently estimates for the LCFS that CNG and LNG trucks reduce GHG-equivalent emissions by 32% and 17%, respectively, compared to gasoline and diesel fuel. In August 2014, CARB proposed reducing the GHG-equivalent benefit of CNG and LNG trucks to 22% and 3%, respectively, compared to gasoline and diesel fuel.

<sup>813</sup> The LNG storage tanks achieve some of their insulating properties due to a vacuum created between the two walls of the double-walled LNG storage tank.

systems (or similar provisions) where they are installed by manufacturers not holding the certificate for the chassis with respect to CO<sub>2</sub> and fuel consumption.

## (2) Additional Natural Gas Topics for Comment

In this section we request comment on several additional areas related to potential regulatory requirements for natural gas fueled vehicles. See Chapter 13 of the Draft RIA for additional details on these topics.

### (a) Request for Comment on Changing Global Warming Potential Values in the Credit Program for CH<sub>4</sub> (See Also Preamble Section II.(D)(5)(b))

The phase 1 heavy-duty vehicle rulemaking establishing greenhouse gas emission standards included a compliance alternative allowing heavy-duty manufacturers and conversion companies to comply with the respective methane or nitrous oxide standards by means of over-complying with CO<sub>2</sub> standards (40 CFR 85.525). The heavy-duty rules allow averaging only between vehicles or engines of the same designated type (referred to as an "averaging set" in the rules). Specifically, the phase 1 heavy-duty rulemaking added a CO<sub>2</sub> credits program which allowed heavy-duty manufacturers to average and bank pollutant emissions to comply with the methane and nitrous oxide requirements after adjusting the CO<sub>2</sub> emission credits (generated from the same averaging set) based on the relative GHG equivalents. To establish the GHG equivalents used by the CO<sub>2</sub> credits program, the phase 1 heavy-duty vehicle rulemaking incorporated the IPCC Fourth Assessment Report global warming potential (GWP) values of 25 for CH<sub>4</sub> and 298 for N<sub>2</sub>O, which are assessed over a 100 year lifetime.

Since the Phase 1 rule was finalized, a new IPCC report has been released (the Fifth Assessment Report), with new GWP estimates. This is prompting us to look again at the relative CO<sub>2</sub> equivalency of methane and to seek comment on whether the methane GWP used to establish the GHG equivalency value for the CO<sub>2</sub> Credit program should be updated to those established by IPCC in its Fifth Assessment Report. The Fifth Assessment Report provides four 100 year GWPs for methane ranging from 28 to 36. Therefore, we not only request comment on whether to update the GWP for methane to that of the Fifth Assessment Report, but also on which value to use from this report.

### (b) Request for Comment on Appropriate Deterioration Factors for NG Tailpipe Emissions

The current assigned deterioration factors for CO<sub>2</sub>, N<sub>2</sub>O, and CH<sub>4</sub> are based on diesel technology. While EPA still believes this is likely appropriate, we would welcome data to support this policy or other comments on how appropriate these factors are applied to NG engines and vehicles.

### (c) Request for Comment on LNG Vehicle Boil-Off Warning System

A simple means to help limit boil-off emissions would be to require that natural gas truck drivers be alerted to expected near-future boil-off events. Such an alert could be in the form of a warning light and associated audible alarm that would indicate that the LNG storage tank is approaching a pressure which would require the tank to vent. Knowing this, the truck driver could take action to prevent such a release, such as starting to drive the vehicle, which likely would reduce the pressure in the tank, or connecting the vent line to either a LNG storage tank or natural gas pipeline for venting. EPA requests comment on the feasibility and appropriateness of a regulatory requirement that LNG fueled vehicles include a warning system that would notify the driver of a pending boil-off event as one means reduce the frequency of such events and thus limit the release of methane.

### (d) Request for Comment on Extending the 5 Day Hold Time for LNG Vehicles

The specifications of the proposed 5 Day Hold Time SAE 2343 safety related standard will only affect new LNG vehicles to prevent boil-off initially and does not address aging vehicles as their insulating properties diminish such as losing vacuum over time that may eventually result in much shorter hold times. LNG tank manufacturers are further developing their technologies for improvement of hold times and reducing boil-off from LNG storage tanks on trucks. These improvements can be incorporated by requiring longer hold times. EPA is soliciting comment on the ability of these emerging technologies to address an extension of 5 days to a longer period of time such as 10 days and the ability to achieve the hold times for the duration of the vehicle's useful life.

### (e) Capturing and/or Converting Methane Refueling or Boil-Off Emissions

We would like input on how effective and feasible the following potential emissions control technologies are for

achieving longer hold times in LNG vehicles.

A methane canister using adsorbents such as ANG (adsorbed natural gas) could be added to capture the methane which otherwise would be released to the environment during a refueling or boil-off event. Once captured, steps could be taken to route the methane to the engine intake once the vehicle is operating again, or to take steps to converting the methane to less GHG-potent CO<sub>2</sub>.

Instead of discharging methane to the environment, the methane potentially could be burned to CO<sub>2</sub> using a burner. Another potential option would be to convert the methane capture in a canister to CO<sub>2</sub> over a catalyst.

### (f) Request for Comment on Reducing Refueling Emissions

When refueling a natural gas vehicle, methane is vented to the atmosphere. As of Tier 3 it is required by EPA to use the ANSI-NGV1-206 standard practice to meet the evaporative emissions refueling requirement. Small puffs of up to 200 cc/hr (which equates to 72 grams of methane per hour) of leakage are allowed with these tests. Often there is a vent line which carries these puffs away from the nozzle interface for safety reasons but is then vented to the atmosphere. EPA is requesting comment on ways to eliminate or reduce these losses. If there must be allowances for losses, then how can this methane gas be captured during refueling using systems that route methane emissions back to the fuel storage tank, whether it is a CNG tank, a CNG pipeline or re-liquefying system for LNG. For LNG, in addition to the boil-off issue is the recurrence of manual venting at refueling by truck operators. Under high pressure circumstances, such as when the vehicle has been sitting for some time period in warmer temperatures, it is necessary to decrease the pressure in the fuel tank before new fuel can enter the tank. The recommended practice is to transfer the extra vaporized fuel to the gas station or natural gas pipeline, but this can take extra time. In some areas it has turned into common practice to just vent to the atmosphere to keep the down time at the refueling station to a minimum. In other areas there is an incentive to reroute the gas into the station storage tank or natural gas pipeline with credit towards the fuel purchase. EPA is requesting comment on approaches to reduce refueling emissions for LNG vehicles.



(g) On-Board Monitoring Requirements for Boil-Off Events and Venting at Refueling

Onboard diagnostics for engines used in vehicle applications greater than 14,000 lbs GVWR are already required to detect and provide a warning for when methane leaks occur due to wear of connections and components of the CNG or LNG fuel system (74 FR 8310, February 24, 2009). We are requesting comments on requiring on-board monitoring to track boil-off events as well as whether the excess vapors were properly vented to the station storage tanks or NG pipeline, or whether the gaseous methane emissions were vented to atmosphere during refueling events. Each boil off event has the potential to release on the order of 5,300–15,800 grams of CH<sub>4</sub> which translates to 132K–400K grams CO<sub>2</sub> equivalent with a GWP of 25 for 100 years.

(h) Separate Standards for Natural Gas Vehicles

As described above, the climate impact of leaks and other methane emissions that occur upstream of the vehicle can potentially be large enough to more than offset the CO<sub>2</sub> benefit of natural gas vehicles as measured at the vehicle tailpipe. EPA is considering separate action to control these upstream emissions. Nevertheless, we have some concern that the impact of upstream emissions for natural gas much higher than for gasoline or diesel fuel because of the high Global Warming Potential (GWP) for methane that makes even small leaks of natural gas of concern. In this way, natural gas is very different than other alternative fuels.

While we are not proposing any provisions to address this, we may consider adopting such provisions in the final rule and are asking for comments on this topic. Would it be appropriate to adjust the tailpipe GHG emission standard for natural gas vehicles by a factor to reflect the life cycle emissions of natural gas vehicles relative to diesel vehicles? For example, if we were to determine that the life-cycle climate impacts of natural gas vehicles were 150 percent of the tailpipe GHG emissions, while the life-cycle climate impacts of diesel vehicles were 135 percent of the tailpipe GHG emissions, we could approximate the relative climate impacts by setting the natural gas tailpipe emission standard 10 percent lower than the diesel tailpipe standard. We recognize that there is significant uncertainty in assessing these relative climate impacts, and that they could change as new production methods and/or regulations go into

effect. Thus commenters supporting making such an adjustment are encouraged to address this uncertainty. Commenters are also encouraged to address how such an adjustment for GHG emissions would impact the closely coordinated EPA and NHTSA heavy-duty Phase 2 program including how a potential adjustment for upstream methane emissions for natural gas fueled vehicles would impact the coordination of EPA GHG regulations with the NHTSA fuel consumption regulations.

*E. Dimethyl Ether*

Although NAS (2014) focused its recommendations on natural gas, it also discussed dimethyl ether (DME), which is a potential heavy-duty truck fuel sourced from natural gas. Dimethyl ether has a high cetane number (more than 55), although its energy density is about 60 percent of that of diesel fuel. Dimethyl ether is a volatile fuel, like liquid petroleum gas, that can be stored as a liquid at normal ambient temperatures under moderate pressure. Typical DME fuel tanks would be designed to prevent any significant evaporative emissions.

A DME fueled truck is only modestly more expensive than a diesel fuel truck. The fuel tank is more expensive than a diesel fuel tank, but much less expensive than an LNG tank since it does not need to be heavily insulated. The engine modifications to enable using DME are also modest. Because DME does not have carbon-carbon bonds that form particulate matter particles during combustion, the particulate filter, which is standard equipment on new diesel trucks, can be eliminated. This offsets some of the engine and fuel tank costs.

Although DME is sourced from cheap natural gas, the conversion of natural gas to DME and moving the fuel to retail outlets greatly increases the cost of the fuel. DME is more expensive than LNG, but still lower in cost than diesel fuel based on the fuel prices in early 2014. DME is estimated to cost \$3.50/DGE, or \$0.30 DGE less than diesel fuel.

Because there is very little DME use in the U.S. (there is only a very small fleet of trucks in California), we did not conduct a lifecycle assessment of DME, but note here a few aspects of a lifecycle analysis for DME. First, since DME is sourced from natural gas, the upstream methane emissions from the natural gas industry would still be allocated to DME. Second, there are not venting issues associated with DME as with LNG or CNG refueling. Third, DME itself has a much lower global warming potential than methane. DME's global

warming potential is estimated to be 0.3 when assessed over a 100 year lifetime, which is about 1 percent of methane's GWP.

## XII. Agencies' Response to Recommendations From the National Academy of Sciences

### A. Overview

As part of the Phase 1 standards, the agencies were informed by a report generated by the National Academy of Sciences (NAS), as required by Congress in EISA.<sup>814</sup> In addition to that initial report, Section 107 of EISA requires that the report be updated in five year intervals through 2025.<sup>815</sup> On September 24, 2016, NAS will release its updated report under Congress' quinquennial update requirement. However, because the Phase 2 rules will be completed prior to the issuance of the first update, NAS issued an interim report in the form of a First Report (NAS HD Phase 2 First Report) published on April 3, 2014.<sup>816</sup> The agencies have consulted the report and considered its findings in creating this proposal. The National Research Council formed the Committee on Technologies and Approaches for Reducing the Fuel Consumption of Medium- and Heavy-Duty Vehicles, Phase Two (the Committee or NAS Committee) in order to prepare the NAS HD Phase 2 First Report. In its Phase 2 First Report, the Committee seeks to advise NHTSA on the HD Phase 2 rules while meeting the agencies' objectives of:

- Reducing in-use emissions of carbon dioxide from medium- and heavy-duty vehicles
- Reducing in-use emissions of other GHGs from medium- and heavy-duty vehicles
- Improving the in-use efficiency of fuel use in medium- and heavy-duty vehicles—by driving innovation, advancement, adoption, and in-use balance of technology through regulation

<sup>814</sup> Energy Independence and Security Act of 2007, Public Law 110–140, section 108(a).

<sup>815</sup> EISA further states that the NAS must submit the report to DOT, the Senate Committee on Commerce, Science, and Transportation, and the House Committee on Energy and Commerce not later than one year after the date on which the Secretary executed the agreement with the NAS.

<sup>816</sup> Transportation Research Board 2014. "Reducing the Fuel Consumption and Greenhouse Gas Emissions of Medium- and Heavy-Duty Vehicles, Phase Two." ("Phase 2 First Report") Washington, DC, The National Academies Press. Cooperative Agreement DTNH22–12–00389. Available electronically from the National Academy Press Web site at [http://www.nap.edu/catalog.php?record\\_id=12845](http://www.nap.edu/catalog.php?record_id=12845) (last accessed December 2, 2014).

In providing the First Report recommendations, the committee acknowledged the following constraints:

- Holding life-cycle cost of technology change or technology addition to an acceptable level
- Holding capital cost of acquiring required new technology to an acceptable level
- Acknowledging the importance of employing a balance of energy resources that offers national security
- Avoiding near-term, precipitous regulatory changes that are disruptive to commercial planning
- Ensuring that the vehicles offered for sale remain suited to their intended purposes and meet user requirements
- Ensuring that the process used to demonstrate compliance is accurate, efficient, and not excessively burdensome
- Not eroding control of criteria pollutants or unregulated species that may have health effects

Although the Phase 2 First Report was developed and written in terms of reducing fuel consumption, its findings and recommendations in general apply equally to a program that reduces GHG emissions, given the close relationship between the two.

#### *B. Major Findings and Recommendations of the NAS Phase 2 First Report*

While the agencies have addressed many NAS recommendations as they pertain to individual areas of the Phase 2 standards, this section consolidates all of the recommendations from the NAS HD Phase 2 First Report and discusses the extent to which the agencies' proposed program is consistent with them. The NAS HD Phase 2 First Report contains more than 40 recommendations to the agencies. All of the Committee's recommendations have been considered, and many of them have been incorporated in the Phase 2 standards. In some instances, the agencies have chosen a different course from the one charted by the NAS Committee's recommendations.

Instead of discussing the NAS report findings and recommendations in the order presented in the Phase 2 First Report itself, this section divides the NAS findings and recommendations in three categories: Findings and recommendations with which (1) the Phase 2 standards are consistent; (2) the Phase 2 standards are significantly inconsistent; and (3) the Phase 2 standards are less-significantly inconsistent.

#### (1) NAS Findings and Recommendations With Which Phase 2 Standards Are Consistent

(a) How should the agencies address standards for trailers in the phase 2 rulemaking?

Given the exclusion of trailers from the Phase 1 standards, the Committee focused on a wide array of opportunities by which the agencies could reduce fuel consumption and GHG emissions. The Committee evaluated potential fuel consumption- and GHG-reducing technologies that can be incorporated on a trailer as well as components of a trailer, such as tire-related technologies.

The Committee found that many opportunities exist for trailers to reduce fuel consumption and GHG emissions of the pulling tractor. More specifically, the Committee evaluated trailer aerodynamics, tire rolling resistance, and tire pressure monitoring systems.

Despite the fuel consumption- and GHG-reducing possibilities of the trailer technologies the Committee evaluated, a survey it conducted found that only 40 percent of new van trailers came equipped with fuel-saving aerodynamic devices.<sup>817</sup> Further, the Committee found that most trailer devices on average, within one year, saved enough in fuel cost to pay for the added cost of the device. The Committee observed that when a trailer is not owned by the tractor operator, there is no incentive for the trailer owner to purchase fuel-saving devices. Moreover, the Committee stated that in absence of regulation, many trailer owners do not choose to employ fuel saving devices.

The Committee recommended that NHTSA, in coordination with EPA, adopt a regulation requiring that all 53 foot and longer dry van and refrigerated van trailers meet performance standards that reduce fuel consumption and GHG emissions.<sup>818</sup> It also recommended that NHTSA assess the benefit of using GEM to address all tractors in combination with trailers.<sup>819</sup> The Committee also recommended the agencies collect real-world data on fleet use of aerodynamic trailers to help inform standards.<sup>820</sup>

As discussed in more detail in Section IV, the agencies are proposing to adopt Phase 2 standards for all new dry van and refrigerated van trailers, including both those above and below 53 feet in length. The agencies have carefully evaluated the lead time for implementation of this potential program to take into consideration

factors such as existing market conditions and the fact that a regulation of new trailers will include companies that have not previously been regulated for fuel consumption and GHG emissions. To the degree that it is available, the agencies are gathering data on real world fleet use of aerodynamic devices, both to understand the overall context of the rules and for specific analytical purposes such as the appropriate role of aerodynamic devices on the reference trailer used for tractor aerodynamic assessment. The agencies have also assessed the benefit of using GEM to address all tractors in combination with trailers and are proposing that, for the long-term program, GEM be used to demonstrate compliance with both the tractor and the trailer requirements of the Phase 2 program.

In addition to the Committee's recommendation that NHTSA and EPA regulate 53 foot and longer box trailers, the Committee recommended that NHTSA and EPA assess the practicability and cost-effectiveness of including pups, flat-beds, and container chassis.<sup>821</sup> The Committee found that pups, flat-beds, and container chassis demonstrated fuel savings, however, factors such as average speed, mileage, and practical concerns such as access to equipment underneath the trailer needed to be assessed.<sup>822</sup>

The agencies have evaluated whether it would be practical and cost effective to include pups (in tandem or separately), other box trailers of lengths between that of pups and standard 53-foot trailers, flatbeds, container chassis (with and without containers attached), tankers, and other trailer types in the Phase 2 regulation. As a result of this analysis, the agencies are proposing to include pups as well as box vans between 28 feet and 53 feet long in Phase 2. With regard to other types of trailers, such as tankers, flatbeds, and container chassis, the agencies have evaluated issues such as trailer plumbing, flat bed ground clearance, chassis stacking, trailer duty cycles, cost of technologies, and other issues. The agencies are proposing that these and other non-box trailers be included in Phase 2 requirements. However the agencies are assuming compliance with the Phase 2 program for these non-box trailers will be limited to tire technologies.

Finally, the Committee examined the use of GEM for tractor and trailer compliance. It asserted that tractors and trailers are fundamentally inseparable

<sup>817</sup> See Note [3] at 78.

<sup>818</sup> *Id.*, Recommendation 6.1.

<sup>819</sup> *Id.*, Recommendation 3.12.

<sup>820</sup> *Id.*, Recommendation 6.1.

<sup>821</sup> *Id.*, 6.2.

<sup>822</sup> *Id.* at 83.

when addressing aerodynamic drag and design. As applied to GEM simulation, the Committee opined that considering tractors and trailers separately for simulation purposes might prove counterproductive, because components on a tractor and trailer might compromise aerodynamic optimization. The Committee recommended that NHTSA assess the benefit of using GEM to address all tractors in combination with trailers.<sup>823</sup>

As stated above, the agencies have assessed the benefit of using GEM to address all tractors in combination with trailers and are proposing to use GEM for both tractors and trailers for the Phase 2 program for tractors and trailers, similar to what was done in Phase 1. In Phase 1, which did not regulate trailers, this meant simulating each tractor being certified as being used in combination with a standard reference trailer. For these rules, we are proposing to simulate each trailer being certified as being used in combination with a standard reference tractor.

(b) Have the agencies revisited dieselization of Class 2b through 7 vehicles?

The Committee reiterated a recommendation from its Phase 1 report regarding the study of dieselization of Class 2b through 7 vehicles.<sup>824</sup> The Committee stated that diesel engines present an opportunity for incremental fuel efficiency gains. The NAS Committee recommended that NHTSA conduct a study of Class 2b to 7 vehicles to consider the incremental fuel consumption reduction of diesels, the price of diesel versus gasoline, and the diesel advantage in durability.<sup>825</sup>

As part of the Phase 2 proposed rule analysis, the agencies evaluated many potential fuel efficiency and greenhouse gas reduction (FE/GHG) technologies for both gasoline and diesel fueled vehicles. As will be discussed in detail in later responses, NHTSA sponsored research at Southwest Research Institute (SwRI) included simulations of baseline and projected Phase 2 FE/GHG technologies for Class 2b through 7 vehicles over a range of appropriate duty cycles.<sup>826</sup> A HD pickup truck (Class 2b), the Dodge Ram 2500, was modeled using a 385-hp 6.7-liter diesel engine as the baseline. The vehicle's baseline performance and the effectiveness of FE/GHG technologies with the diesel engine were compared over identical duty

cycles to two gasoline engines, a 6.2-liter naturally aspirated gasoline V-8 and 3.5-liter turbocharged direct injection V-6, with their corresponding engine technologies. Similarly, two medium-duty trucks (Class 6), the Ford F-650 and Kenworth T-270, were modeled using a 300-hp 6.7-liter diesel engine as the baseline and compared to the two aforementioned medium-duty V-8 and V-6 gasoline engines.

Many of the diesel engine technologies evaluated in supporting Phase 2 research are currently available, proven, and on the path to increased penetration across the fleet. Other technologies are still in development and looking for the opportunity to enter the mainstream production lifecycle. For the latter, the agencies believe, as informed through the proposed rule development research, that costs, reliability, durability, and clear user benefits are important when determining potential future technology applications to achieve attainable standards resulting in real-world reductions. As identified in the proposal, the agencies considered these important factors when developing the proposed standards and, included in the analysis, are technologies that recognize the value of the current and future fleet dieselization.

However, the agencies recognize that there are valid reasons for why medium and heavy-duty vehicle purchasers sometimes choose gasoline engines over diesels. Gasoline engines are generally lighter and less expensive than diesels, although they typically do not last as long in heavy-service. For applications in which the vehicle is not expected to travel many miles each year, gasoline engines may be the best choice. On the other hand, for applications in which the vehicle is expected to travel many miles each year, diesels can be a more appropriate choice.

(c) What kind of analyses are the agencies doing on upstream emissions related to natural gas?

The NAS Committee discussed the potential natural gas presents for reducing fuel consumption and GHG emissions in medium- and heavy-duty vehicles. The Committee stated that while tailpipe emissions are often the most observable instance of fuel consumption and tailpipe emissions, the fuel production, distribution, and processing components of obtaining natural gas for use in vehicles also factors into any calculation of overall benefits derived from natural gas vehicles.<sup>827</sup> The Committee

recommended that NHTSA, in coordination with EPA, begin to consider the well-to-wheel, life-cycle energy consumption and greenhouse emissions associated with different vehicle and energy technologies to ensure future rulemakings best accomplish their overall goals.<sup>828</sup>

The agencies recognize that understanding the life-cycle implications of vehicle and energy technologies is important to ensure that the rulemaking accomplishes its overall goals. In the Draft and Final Environmental Impact Statement (EIS) prepared for the 2017 and Later Model Year Light-Duty Vehicle GHG Emissions and CAFE Standards rulemaking, NHTSA introduced a literature synthesis of life-cycle environmental impacts of certain vehicle materials and technologies. Consistent with that approach, in the Draft EIS for Phase 2, NHTSA has again provided a literature synthesis of life-cycle environmental impacts, focusing on the unique vehicle technologies for the HD sector and incorporating by reference the literature synthesis prepared for the MY 2017 and beyond CAFE Final EIS. The Draft EIS also uses the GREET fuel-cycle model to assess upstream emissions from extraction, refining, and transportation of medium- and heavy-duty vehicle fuels. This information in the Draft EIS informs both the agency and the public about the potential life-cycle implications of the various technologies under consideration in this rulemaking. NHTSA invites comments on the Draft EIS and its literature synthesis of life-cycle environmental impacts.

EPA has also evaluated the lifecycle impact of heavy-duty trucks being fueled with natural gas in comparison to other heavy-duty trucks. This analysis is presented in Section XI along with a discussion of projections for future use of natural gas by heavy-duty trucks.

(d) How have the agencies evaluated aerodynamic testing methods for the Phase 2 program?

With regard to aerodynamic devices, the NAS Committee reviewed aerodynamic test procedures related to evaluating aerodynamic effectiveness. The Committee found that industry testing procedures can vary widely because of the precision of the standards themselves.<sup>829</sup> Further, the Committee found that fidelity of test results from coastdown procedures versus results from a powered on-track test is not known. The Committee recommended that NHTSA and EPA evaluate the

<sup>823</sup> *Id.* at 38, Recommendation 3.12.

<sup>824</sup> *Id.* at 14–15.

<sup>825</sup> *Id.*

<sup>826</sup> See the 2015 NHTSA Technology Study, Note 289 above.

<sup>827</sup> *Id.* at 19–20.

<sup>828</sup> *Id.* at 20, Recommendation 1.10.

<sup>829</sup> *Id.* at 83–84.

relative fidelities of the coast-down procedure and candidate powered procedures to define and optimum prescribed full-vehicle test procedure and process and validate the improved procedure against real world vehicle testing.<sup>830</sup> It also recommended that NHTSA and EPA assess whether adding yaw loads provides significantly increased value to the Cd result. The Committee recommended providing updated test data to manufacturers to increase consumer confidence in the accuracy (and real-world applicability) of the testing measures as related to aerodynamic devices.<sup>831 832</sup>

The agencies have undertaken a coordinated research program to inform the Phase 2 certification test procedure for aerodynamic drag and tire rolling resistance. The U.S. EPA and its contractors have evaluated coastdown, constant speed, CFD, and scale wind tunnel testing for tractors and trailers. The goals of this research effort were to: Assess variability between test methods; assess how yaw impacts aerodynamic performance; evaluate correlation of different test methods one to another; assess the impact of different tractor/trailer design attributes on the test results; examine how differences between manufacturers' products impact aerodynamics; and measure Cd improvements from a variety of aerodynamic devices in combination and alone. NHTSA and its contractors conducted simulation modeling to: Evaluate aerodynamic drag and tire rolling resistance improvements in combination with other vehicle and engine technologies, and determine the impact of different duty cycles on aerodynamic drag performance. Finally, EPA has conducted an analysis to determine whether or not adding yaw adjustments to the certification process improves the Cd result. As a result, the agencies are proposing to add yaw adjustments to the certification process for tractors. The agencies are disseminating the results of these test programs and conclusions at association meetings and public meetings such as SAE COMVEC.

Through the research programs described above, the agencies have evaluated aerodynamic data that better reflects real-world experience. And, to the extent available, the agencies have collected aerodynamic performance data that reflect real-world experience. This information has informed the Phase 2 proposal. For example, in addition to the agencies are proposing to account

for yaw in the aerodynamic assessment for Cd, we are also proposing changes to vehicle speeds used in the aerodynamic reference test procedure to facilitate improved estimation of Cd.

(e) What kind of new modeling research has been conducted to inform Phase 2?

With a wide range of potential fuel consumption- and GHG emissions reducing technologies, the NAS Committee found that it is proper to assess the various combinations of technologies in real-world testing and in modeling. The Committee recommended that NHTSA conduct detailed simulation modeling in addition to physical testing.<sup>833</sup>

In September 2012, NHTSA contracted with the Southwest Research Institute (SwRI) to conduct research in support of the next phase of Federal fuel efficiency (FE) and GHG standards.<sup>834</sup> Tasks included determining the baseline fuel efficiency and emissions levels and technologies of current model year commercial medium- and heavy-duty on-highway vehicles and work trucks, as well as projections of Phase 2 fuel efficiency and emission reduction technologies for diesel and gasoline powered vehicles. The scope encompassed technologies for chassis and final-stage manufacturer vehicles and trailers, maintenance cost, material application, future design, capital investment, retail cost/payback and any other applicable advanced technologies. Estimates of the costs, fuel savings effectiveness, availability, and applicability of technologies were done for each individual vehicle class category (e.g., segment).

Selection of FE/GHG technologies, engines, vehicles, drive-cycles, etc. for the simulation modeling at SwRI was done in coordination with EPA, which had complimentary HD research programs involving vehicle road testing and engine dynamometer testing that informed the simulation efforts. The SwRI analysis relied on a technology list that was developed from recent NAS HD vehicle fuel consumption reports as well as an extensive literature review. Four base engines and four vehicles spanning the class 2b to class 8 vehicle segments were selected for simulation. Experimental data was available from other projects for all of the vehicles and engines simulated, and full use of experimental data was made to calibrate the models before additional technologies were evaluated.

SwRI used a vehicle simulation tool developed in-house to model vehicle

performance over a range of drive cycles. The commercial software GT-POWER (Gamma Technologies, Inc.) was used to model engine performance, fuel consumption, and CO<sub>2</sub> emissions over the full speed-load range. Results of the agency-sponsored simulation modeling at SwRI will be issued in peer-reviewed research reports.

(f) How has GEM been modified by EPA?

In its report, the NAS Committee focused many of its recommendations on EPA's GEM. The Committee concentrated on what features could be incorporated into GEM in order to improve the model's ability to provide outputs representative of real-world use.

More specifically, the Committee found that GEM output was unaffected by the actual use of a smaller or larger engine in the same subcategory because the engine map used by GEM is predefined.<sup>835</sup> The NAS Committee recommended that the agencies should assess whether a single steady-state speed-torque map is sufficient for GEM accuracy in engine efficiency prediction.<sup>836</sup> EPA has evaluated this question and is modifying GEM to allow for different maps as an input.

Additionally, the Committee emphasized that a certification test must be highly accurate and repeatable. It stated that the need to account for the close interaction of the engine with other components, including the aftertreatment subsystem and transmission.<sup>837</sup> NAS recommended that the agencies allow powertrain testing for certification.<sup>838</sup> As described in Section II, the agencies are doing so in conjunction with GEM. See the proposed provisions in 40 CFR 1037.550, which further discusses powertrain testing and certification.

More generally, the NAS Committee recommended revising GEM to reflect the benefit of integrating an engines, aftertreatment, and transmissions and to cover as large a fraction of over-the-road tractor operation as possible without becoming overly cumbersome.<sup>839</sup> As described in Section II and in Chapter 4 of the draft RIA, the agencies believe the proposed revisions to GEM reflect this.

(g) What have the agencies done to validate GEM testing?

The NAS Committee expressed concern over GEM's ability to translate

<sup>830</sup> *Id.* at 84, Recommendation 6.3.

<sup>831</sup> *Id.* at 36, Recommendation 3.5.

<sup>832</sup> *Id.* at 84, Recommendation 6.3.

<sup>833</sup> *Id.* at 24, Recommendation 2.1.

<sup>834</sup> *Id.*

<sup>835</sup> *Id.* at 37.

<sup>836</sup> *Id.*, Recommendation 3.8.

<sup>837</sup> *Id.* at 14.

<sup>838</sup> *Id.*, Recommendation 1.6.

<sup>839</sup> *Id.* at 37, Recommendations 3.10, 3.11.

to real world reductions in fuel consumption and GHG emissions. In particular, the Committee found that GEM's current certification procedures have limited unbound variables that can be user-specified and do not allow for synergy between components.<sup>840</sup> Moreover, the NAS Committee found that GEM does not allow for the operation of components in the most efficient way or efficiency that could be gained by the operation of a component at a higher relative load, concluding that vehicle designs that are optimized for the conditions of the simulation might not be optimized in real world operation.<sup>841</sup> The Committee recommended that NHTSA conduct a real world evaluation to validate GEM inputs with the fuel consumption outputs.<sup>842</sup> Additionally, it recommended that EPA and NHTSA should assess whether a steady-state torque map is sufficient for GEM accuracy in engine efficiency prediction.<sup>843</sup>

Recently, EPA and NHTSA sponsored a technical workshop at the Southwest Research Institute (SwRI). At this workshop, SwRI presented a multi-year research effort sponsored by EPA to validate GEM. The development version of GEM incorporates several engine, transmission, driveline, and vehicle technologies being considered to meet FE and GHG standards for MD/HD vehicles. GEM (including the steady-state fuel map approach) was validated by the agencies against over 130 test cases (multiple runs) of different size vehicles. See Section II of this notice and Chapter 4 of the draft RIA for further information about this validation work.

(h) Has NHTSA considered non-vehicular strategies to reduce fuel consumption?

In examining the broader picture of reducing fuel consumption, the NAS Committee found that there are opportunities to reduce fuel consumption in ways that exceed NHTSA's statutory authority.<sup>844</sup> The Committee recommended that NHTSA work with and encourage EPA, DOE, and FHWA to reduce fuel consumption and GHG emissions by exploring non-vehicle approaches.<sup>845</sup>

NHTSA is jointly releasing this rulemaking with EPA, and has involved EPA as a co-drafter throughout the

development of these rules. NHTSA has also worked with DOE, and has been in touch with FHWA about medium- and heavy duty fuel efficiency. While the majority of NHTSA's work with these agencies has been vehicle-related, NHTSA supports research and development on nonvehicle methods to reduce fuel consumption.

(2) NAS Findings and Recommendations With Which the Phase 2 Standards Are Significantly Inconsistent and Why the Agencies Chose a Different Course

(a) Should the agencies propose separate standards for natural gas vehicles?

The NAS Committee found that natural gas is a viable option to reduce fuel consumption and can also contribute to a reduction in GHG emissions, "unless additional findings of methane leakage alter this vision."<sup>846</sup> It noted that natural gas engines are well-developed and are ready for use for medium- and heavy-duty vehicles, including Class 8 trucks. The Committee stated that while the load-specific CO<sub>2</sub> emissions from natural gas engines are less than a comparable diesel engine, that benefit is partially negated by lower engine efficiency and methane emissions.<sup>847</sup> The NAS Committee recommended that NHTSA and EPA develop a separate standard for natural gas vehicles, similar to that in diesel- and gasoline-fueled engines.<sup>848</sup> We interpret this to mean standards that require natural gas-fueled engines to achieve similar thermal efficiency to diesel- and gasoline-fueled engines; in other words more stringent standards than would apply under a continuation of the Phase 1 approach. Further, the Committee recommended the agencies do this without disrupting commercial transportation business models, though the Committee did not provide specific recommendations for how to achieve this goal.<sup>849</sup> It recommended that GEM certification tools need to include natural gas engine maps to accurately quantify the emissions and fuel economy of natural gas vehicles. The Committee also requested that EPA and NHTSA assemble a best estimate of well-to-tank GHG emissions to be used for developing future rulemakings.<sup>850</sup>

The agencies closely evaluated the recommendation for NHTSA and EPA to develop a separate natural gas standard for HD vehicles. The agencies are not proposing a separate standard for

natural gas engines or for natural gas powered vehicles for the Phase 2 program primarily, because the current market share is still at or below one percent of the total heavy-duty fleet and we do not project a significant increase in natural gas use during the Phase 2 timeframe. Given its current status, we do not want to inhibit the adoption of this potentially promising alternative fuel through more stringent standards. Other reasons to hold back on potentially establishing separate natural gas fuel standards at this time include the fact that there is uncertainty in the quantification of methane emissions, both upstream emissions as well as potential leakage on a vehicle, particularly the LNG vehicle boil-off emissions, which makes it very difficult to perform a rigorous analysis regarding the potential impacts of a separate natural gas standard; the industry itself is in the process of developing its technology and as it matures there is potential for self-correction to address methane leaks in recognition of environmental concerns that might affect its status as a potential green alternative fuel.

With regard to well-to-tank or upstream emissions, the medium- and heavy-duty fuel efficiency program focuses on the tailpipe emissions of these vehicles for multiple reasons, including test measurement capabilities and the use of simulated output tools calibrated to test lab measurements. The agencies continue to evaluate the potential impacts and the benefits of a holistic approach for incorporating well-to-tank emissions into future rulemakings.

As data comes available a better estimate can be made on the emissions impact from any potential regulations. The agencies will closely monitor developments in natural gas adoption over the course of the rulemaking timeframe and determine if additional action may be necessary to prevent methane emissions increases. See Section XI of this preamble for additional discussion regarding the treatment of natural gas fuel, engines and vehicles in this proposal, as well as for a detailed discussion of lifecycle emissions.

(b) How are the agencies handling uniformity and accuracy regarding tire rolling resistance characteristics?

The NAS Committee expressed concern about the process by which rolling resistance values are established.<sup>851</sup> Specifically, the Committee noted that the process for

<sup>840</sup> *Id.* at 11.

<sup>841</sup> *Id.*

<sup>842</sup> *Id.*, Recommendation 1.2.

<sup>843</sup> *Id.* at 37, Recommendation 3.8.

<sup>844</sup> *Id.* at 15.

<sup>845</sup> *Id.*, Recommendation 1.9.

<sup>846</sup> *Id.* at 65.

<sup>847</sup> *Id.*

<sup>848</sup> *Id.* at 65, Recommendation 5.2.

<sup>849</sup> *Id.* at 65, Recommendation 5.3.

<sup>850</sup> *Id.* at 65, Recommendation 5.1.

<sup>851</sup> *Id.* at 35–36.

determining tire rolling resistance is new and variability is not as well known. The Committee recommended that the agencies implement a mechanism for obtaining accurate tire rolling resistance factors, including establishing a tire alignment laboratory.<sup>852 853</sup> Additionally, the Committee recommended that this data be available in the through the Uniform Tire Quality Grading system.<sup>854</sup>

In Phase 1, the agencies received comments from stakeholders highlighting a need to develop a reference lab and alignment tires for the HD sector. The agencies noted the lab-to-lab comparison conducted in the Phase 1 EPA tire test program. The agencies reviewed the rolling resistance data from the tires that were tested at both the STL and Smithers laboratories to assess inter-laboratory and test machine variability. The agencies conducted statistical analysis of the data to gain better understanding of lab-to-lab correlation and developed an adjustment factor for data measured at each of the test labs. Based on these results, the agencies believe the lab-to-lab variation for the STL and Smithers laboratories would have very small effect on measured rolling resistance values. Based on the test data, the agencies judge that it is reasonable to continue the HD Phase 2 program with current levels of variability, and consider the use of either Smithers or STL laboratories to be acceptable for determining the tire rolling resistance value in Phase 2. Note that the agencies have not made similar findings for other laboratories. However, we welcome comment on the need to establish a reference machine for the HD sector and interest from tire testing facilities to commit to developing a reference machine.

In the final rule for the Phase 1 program, the agencies stated that compliance values submitted to the agencies should be derived using the ISO 28580 test method for drive tires and steer tires planned for fitment to the vehicle being certified.<sup>855</sup> The agencies believe that following a defined, standardized test procedure will provide levels of consistency in submitted compliance values. The agencies conducted substantive testing to develop the final tire Crr standards in the Phase 1 rule at two different testing laboratories for comparison to test for variability. The agencies concluded that although laboratory-to-laboratory and

test machine-to-test machine measurement variability exists, the level observed is not excessive relative to the distribution of absolute measured Crr performance values and relative to the proposed standards. Based on this, the agencies concluded that the test protocol and the proposed standards are reasonable for this program.

The agencies are considering publishing the tire Crr levels from fuel efficiency and GHG emission program compliance data. Because compliance data are submitted by vehicle manufacturers rather than directly from the tire manufacturers or agency directed testing they could vary for a given tire model among vehicle manufacturer submissions, or lag when tires are redesigned. Based on considerations such as this, the agencies are not proposing to establish a public database for heavy-duty vehicle tire rolling resistance information at this time.

(c) Have the agencies considered industry standards for medium- and heavy-duty Tire Pressure Systems (TPS)?

The NAS Committee found that tire pressure monitoring systems and automatic tire inflation systems are being adopted by fleets at an increasing rate.<sup>856</sup> However, the Committee noted that there are no standards for performance, display, and system validation. The Committee recommended that NHTSA issue a white paper to clarify the minimum performance needed from these systems from a safety perspective.<sup>857</sup> This recommendation addresses the effects of tire pressure systems on vehicle safety. Because the recommendation for a white paper relates to safety, and is not directed at fuel efficiency or GHG emissions effects, the agencies are not responding to the NAS recommendation in this proposal.

Nevertheless, the agencies note that automatic tire inflation systems can improve fuel efficiency and greenhouse gas emissions (see Preamble Section III/ draft RIA Chapter 2) by maintaining tire pressure close to the tire pressure specification. The agencies are proposing to recognize automatic tire inflation systems as a technology that improves fuel efficiency for tractors, trailers and vocational vehicles in the GEM vehicle compliance model.

(d) Will NHTSA survey private fleets or leverage government fleets to gather information for the Phase 2 rulemaking?

In its report, the NAS Committee found that there are many additional methods by which NHTSA could gather fleet information to inform the Phase 2 rulemaking. The Committee recommended that NHTSA gather data from private fleets, and work with the General Services Administration or United States Postal Service to evaluate the fleet of vehicles they possess.<sup>858 859</sup>

NHTSA understands that additional fleet information could be helpful for purposes of formulating medium- and heavy-duty fuel efficiency standards. Due to the length of time necessary to capture useful, relevant data from fleets, NHTSA was unable to conduct public or private fleet studies to inform this rulemaking. NHTSA will take these recommendations under advisement to inform the agency in the future. For the time being, the agencies have utilized data from FHWA, EPA's SmartWay program, Polk, and other sources of fleet information.

(e) GEM Inputs and Outputs

The NAS Committee found that GEM Version 2.0.1 is not compatible with automated order entry systems of OEMs.<sup>860</sup> It recommended that the GEM programmers configure GEM to be compatible with existing OEM order entry systems<sup>861</sup> and provide a more useful output that includes graphs and other presentation methods.<sup>862</sup> However, EPA believes these recommendations are beyond the scope of this rulemaking.

(f) OEM-Specific Code

The NAS committee stated models should be capable of simulating real-world component behavior, and should not be oversimplified.<sup>863</sup> It recommended allowing OEMs to substitute OEM-specific models or code for the fixed models in the current GEM, including substituting a power pack (the engine, aftertreatment, transmission).<sup>864</sup> However, as described in Section II, we are not proposing to allow this for a number of reasons. NAS explained that its goal was to reflect real-world operation accurately. We believe the powertrain test option could be used to achieve this goal.

<sup>852</sup> *Id.* at 36, Recommendation 3.4, 6.6 p 84.

<sup>853</sup> *Id.* at 84, Recommendation 6.6.

<sup>854</sup> *Id.* at 36, Recommendation 3.4.

<sup>855</sup> 76 FR 57182–57185.

<sup>856</sup> *Phase 2 First Report* at 84.

<sup>857</sup> *Id.*, Recommendation 6.4.

<sup>858</sup> *Id.* at 43, Recommendation 4.2, 4.3, and 4.4.

<sup>859</sup> *Id.* at 11, Recommendation 1.3.

<sup>860</sup> *Id.* at 35.

<sup>861</sup> *Id.*, Recommendation 3.2.

<sup>862</sup> *Id.*, Recommendation 3.3.

<sup>863</sup> *Id.* at 37.

<sup>864</sup> *Id.*, Recommendation 3.7.

(3) NAS Findings and Recommendations With Which the Phase 2 Standards Are Less-Significantly Inconsistent

(a) What are the agencies doing with respect to fuel specifications for natural gas?

The Committee found that natural gas provides a potential long-term price advantage backed by an abundant supply.<sup>865</sup> In addition to its other natural gas (NG)-specific recommendations, the Committee recommended government and the private sector should support further technical improvements in engine efficiency and operating costs, reduction of storage costs, and emission controls (as is done for diesel engines).<sup>866</sup> Further, it recommended that NHTSA and EPA should also evaluate the need for and benefits and costs of an in-use NG fuel specification for motor vehicle use.

The agencies recognize the value in evaluating an in-use NG fuel specification for motor vehicle use. EPA has developed and promulgated fuel specifications for other motor vehicle fuel types, both for test fuels and for in-use fuels. Such fuel specifications established by EPA usually complement fuel specifications established by third party organizations such as ASTM.

EPA has established fuel specifications for natural gas used as test fuels for emissions testing,<sup>867</sup> but has not adopted specifications for in-use natural gas used as a motor vehicle or off-highway fuel. However, states have set natural gas quality limits on the natural gas sold within the state, and natural gas pipelines have established specifications for the natural gas either for their own purposes or to ensure that the natural gas being transported by its pipeline will be usable within the states to which the pipeline transports the natural gas. These specifications would apply to natural gas used as a motor vehicle fuel.

EPA may consider establishing in-use specifications for natural gas used as a motor vehicle or off-highway fuel in the future. However, because natural gas use within the transportation sector is currently so small (less than 1 percent of total natural gas demand and less than 1 percent of heavy-duty fuel demand), its use for transportation would not have a separate fuel supply system, and it would not make sense

that such a small user segment should dictate fuel quality for the overall fuel supply. Like other potential regulations that EPA might consider, EPA will consider establishing fuel quality regulations on natural gas if and when its use increases as a fuel for the transportation sector.

(b) Have the agencies considered low rolling resistance standards for all new tires?

With regard to low rolling resistance tires, the NAS Committee found that 70 percent of new tires sold in 2012 were for replacement of existing tires.<sup>868</sup> It found that although most new tractors and trailers come equipped with SmartWay verified tires, only 42 percent of replacement tires are SmartWay verified.<sup>869</sup> The Committee recommended that NHTSA and EPA evaluate rolling resistance of new tires, especially those sold as replacements.<sup>870</sup> It recommended that NHTSA adopt a regulation establishing a low rolling resistance standard for all new tires designed for tractor and trailer use.<sup>871</sup>

The agencies are proposing to include low rolling resistance tires as a technology that may be used for compliance for fuel efficiency and GHG standards. The agencies conducted tire rolling resistance testing and considered confidential business information data provided by several tire manufacturers, which is discussed in Preamble Sections III, IV, and V and draft RIA Chapter 2. The agencies have focused our resources and attention to develop standards for new vehicles and engines. NHTSA has not conducted work to consider a rolling resistance performance standard for replacement tires at this time and will take the Committee's recommendation under advisement.

(c) Have the agencies considered a protocol for measuring and reporting the coefficient of rolling resistance to aid in consumer selection?

The Committee recommended that the agencies consider establishing a protocol for measuring and reporting the coefficient of rolling resistance to aid in consumer selection, similar to passenger car tires.<sup>872</sup> At this time, the agencies are taking the Committee's recommendation under advisement.

(d) What other revisions are the agencies making to GEM?

Consistent with the NAS Committee's recommendations, the agencies are proposing to make the following revisions to GEM, as also detailed Preamble Section II:

Allowing manufacturers to input parameters related to engines, transmissions, and axles

- Basing GEM on a steady-state fuel map
- Allowing separate fuel maps for alternative fuels
- Including real-world road grade to highway cycles
- Use of wind-average drag coefficients for aerodynamic inputs

However, the agencies are not making other changes recommended by NAS. We are not making the user interface changes recommended by the Committee on behalf of manufacturers. Our recent discussions with manufacturers indicate that they have adopted ordering systems that are consistent with the current interface. We are also not revising GEM to allow manufacturers to input their own shift strategies. Instead, we are proposing a powertrain test option that would serve the same purpose.

The NAS Committee also recommended that we broaden GEM to allow for additional duty-cycles and actual vehicle weights. We believe that such changes would not significantly improve the overall program, but would add significant complexity.

(e) Vehicle Weight and Payload in GEM

The NAS Committee recommended that NHTSA evaluate the load specific fuel consumption (LSFC) at more than one payload to ensure there is not an undesirable acute sensitivity to payload by a particular truck power train and to reflect the fact that some states allow vehicles to operate with gross combination vehicle weight ratings well in excess of the values adopted for the simulation. NAS also recommended that GEM allow manufacturers to input actual vehicle weights.<sup>873</sup>

As described in Section III, the agencies are proposing to modify GEM to allow heavy-haul vehicles to be certified separately, to reflect their unique weight and payload attributes. However, are not proposing to allow for other payloads or weights to minimize complexity during the compliance process.

<sup>865</sup> *Id.* at 65.

<sup>866</sup> *Id.*, Recommendation 5.4.

<sup>867</sup> EPA set natural gas test fuel quality for light-duty and heavy-duty engines in 1994 (40 CFR 86.113–94 and 86.1313–94, respectively), and for nonroad engines in 2002 (40 CFR 1065.715).

<sup>868</sup> *Id.* at 84.

<sup>869</sup> *Id.*

<sup>870</sup> *Id.*, Recommendation 6.5.

<sup>871</sup> *Id.*

<sup>872</sup> *Id.* at 14, Recommendation 1.8.

<sup>873</sup> *Id.* at 9, Recommendation 1.1.



(f) Is NHTSA conducting any campaigns related to fuel efficient driving behaviors?

In the NAS Committee's Phase 1 report,<sup>874</sup> the Committee concluded that fuel saving opportunities exist if drivers are educated about fuel efficient driving techniques.<sup>875</sup> The Phase 2 reiterated this finding, and recommended NHTSA encourage and incentivize the dissemination of information related to the relationship between driver behavior and fuel savings.<sup>876</sup>

Based on NHTSA's understanding of the medium- and heavy-duty segments, a large portion of the vehicles are driven professionally. Professional drivers operate these vehicles as independent drivers and in trucking fleets. In some instances, particularly larger fleet operations, management will track and encourage driver fuel efficiency. It is not uncommon for professional drivers across all types of trucking operations to undergo private fuel efficiency training. For these reasons, NHTSA has not yet undertaken dissemination of information related to the relationship between driver behavior and fuel savings.

### XIII. Amendments to Phase 1 Standards

The agencies are proposing revisions to the regulatory text specifying test procedures and compliance provisions used for Phase 1. For the most part, these amendments would apply exclusively to the Phase 2 rules. In a few limited instances, the agencies are proposing to apply some of these changes to Phase 1. These limited changes to the Phase 1 program are largely conforming amendments, and are described below, along with other proposed minor changes to the Phase 1 compliance program. We note, however, that we are not reopening the Phase 1 rules in a general sense, nor are we requesting comment on the stringency of the Phase 1 standards or other fundamental aspects of the Phase 1 program.

<sup>874</sup> Committee to Assess Fuel Economy Technologies for Medium- and Heavy-Duty Vehicles; National Research Council; Transportation Research Board (2010). "Technologies and Approaches to Reducing the Fuel Consumption of Medium- and Heavy-Duty Vehicles," ("NAS Report"), at page 9. Washington, DC, The National Academies Press. Contract DTNH22-08-H-00222. Available electronically from the National Academy Press Web site at <http://www.nap.edu/catalog.php?record.id=12845> (last accessed September 10, 2014.)

<sup>875</sup> *Id.* at 177.

<sup>876</sup> Phase 2 First Report at 14, Recommendation 1.8.

#### A. EPA Amendments

##### (1) Pickups and Vans

EPA is proposing to relocate the GHG standards and other regulatory provisions for chassis-certified HD pickups and vans in the Code of Federal Regulations from 40 CFR 1037.104 to 40 CFR 86.1819–14. Accordingly, NHTSA will modify any of EPA's references in 49 CFR parts 523 and 535 to accommodate the migration. EPA is making this change largely to address ambiguities regarding the application of additional provisions from 40 CFR part 86, subpart S, for these vehicles. The approach in 40 CFR 1037.104 was to state that all of 40 CFR part 86, subpart S, applies except as specified in 40 CFR 1037.104; however, the recent standards adopted for light-duty vehicles and light-duty trucks included several changes to 40 CFR part 86, subpart S, that should not apply for chassis-certified HD pickups and vans. Based on our experience implementing the Phase 1 program, we believe it is appropriate to include the GHG standards for chassis-certified HD pickups and vans in the same part as light-duty vehicles (40 CFR part 86, subpart S). All other certification requirements for these heavy-duty vehicles—criteria exhaust standards, evaporative and refueling standards, provisions for onboard diagnostics, and the range of certification and compliance provisions—are in that subpart. We note that we have not experienced the same challenges for other heavy-duty vehicles, and are therefore not proposing to relocate the other provisions of 40 CFR part 1037.

This migration has highlighted a few areas where we need to clarify how the regulations apply for chassis-certified HD pickups and vans. In particular, EPA is proposing to make the following changes:

- Clarify that the GHG standards apply at high-altitude conditions
  - State that fleet-average calculation of carbon-related exhaust emissions (CREE) is not required for chassis-certified HD pickups and vans
  - Clarify that requirements related to model types and production-weighted average calculation apply on any passenger automobiles and light trucks
  - State that the credit and debit provisions of 40 CFR 86.1865–12(k)(5) do not apply for chassis-certified HD pickups and vans
- Clarify that the Temporary Lead Time Allowance Alternative Standards in 40 CFR 86.1865–12(k)(7) do not apply for chassis-certified HD pickups and vans

- State that the early credit provisions of 40 CFR 86.1866–12, 86.1867–12, 86.1868–12, 86.1869–12, 86.1870–12, and 86.1871–12 do not apply for chassis-certified HD pickups and vans

##### (2) Heavy-Duty Engines

As described in Section II, EPA is proposing to revise the approach to classifying gaseous-fuel engines with respect to both GHG and criteria emission standards. This does not affect the vehicle-based standards that apply under 40 CFR part 1037. The general approach would be to continue to divide these engines into spark-ignition and compression-ignition categories, but we propose to always apply the compression-ignition standards to gaseous-fuel engines that qualify as medium heavy-duty or heavy heavy-duty engines. Currently, any gaseous-fuel engine derived from a gasoline engine would be subject to the spark-ignition standards no matter the weight class of the vehicle. As described in Section II, EPA now believes this approach does not reflect the reality that gaseous-fuel engines used in Class 6, 7, or 8 vehicles compete with diesel engines rather than gasoline engines. Such engines compete directly with diesel engines, and we believe they should be required to meet the same emission standards. Because all current gaseous-fuel engines for these large vehicles are already being certified to the compression-ignition engine standards we can propose to also apply this approach to engines subject to the HD GHG Phase 1 standards without adverse impacts on any manufacturers.

EPA is also proposing to revise the regulation to spell out how to apply enforcement liability for a situation in which the engine manufacturer uses deficit credits for one or more model years. Simply put, any time an engine manufacturer is allowed to carry a deficit to the next year, all enforcement liability for the engines that generated the deficit are extended for another year. These provisions are the same as what we have already adopted for heavy-duty vehicles subject to GHG standards under 40 CFR part 1037.

##### (3) Evaporative Emission Testing for LNG Vehicles

Heavy-duty vehicles fueled by natural gas have for many years been subject to evaporative emission standards and test procedures. While fuel systems containing gasoline require extensive design features to handle vented fuel, fuel systems containing natural gas generally prevent evaporative losses by remaining sealed. In the case of compressed natural gas, there is a



voluntary consensus standard, ANSI NGV1–2006, that is designed to ensure that there are no leaks or losses during a refueling event. Since compressed natural gas systems remain sealed indefinitely once the refueling event is complete, we understand that complying with the ANSI refueling standard is sufficient to demonstrate that the vehicle also complies with all applicable evaporative emission standards. The Light-Duty Tier 3 final rule included provisions to clarify that compressed natural gas systems meeting the applicable ANSI standard are deemed to comply with EPA's evaporative emission standards.

Systems using liquefied natural gas (LNG) behave similarly, except that the cryogenically stored fuel needs to be vented to prevent an over-pressure situation if the vehicle is not used for an extended time, as described in Section XI. Such vehicles are currently subject to evaporative emission standards and test procedures, though there are some substantial questions about how one can best apply the procedures to these systems; not all of the instructions about preconditioning the vehicle are straightforward for cryogenic fuel systems with no evaporative canister. EPA is interested in pursuing an approach that is similar to what applies for compressed natural gas systems, which would need some additional attention to address boil-off emissions. There are two voluntary consensus standards that specify recommended practices to lengthen the time before boil-off starts to occur for LNG systems. SAE J2343 specifies a minimum five-day hold time and NFPA 52 specifies a minimum three-day hold time. EPA is proposing to require that manufacturers of LNG vehicles meet the SAE J2343 standard as a means of demonstrating compliance with the evaporative emission standards.

While the hold-time requirements of SAE J2343 and NFPA 52 are clear, there appears to be very little description of the procedure to determine how much time passes between a refueling event and initial venting. To ensure that all manufacturers are subject to the same set of requirements, we are proposing to include a minimal set of specifications corresponding to the demonstration under SAE J2343. In particular, EPA proposes to specify that the vehicle must remain parked throughout the measurement procedure, ambient temperatures must remain between 20 and 30 °C, the refueling event must follow conventional procedures corresponding to the vehicle's hardware, and no stabilization step is allowed after the refueling event.

The proposed rules provides for relying on compliance with SAE J2343 as a means of demonstrating compliance with evaporative emission standards immediately upon completion of the final rule. EPA is proposing to make this mandatory for vehicles produced on or after January 1, 2020.

EPA requests comment on all aspects of the proposed provisions for LNG vehicles.

#### (4) Compliance and Other General Provisions

EPA proposes the following changes that apply broadly for different types of vehicles or engines:

- Add a requirement for vehicle manufacturers that sell incomplete vehicles to secondary vehicle manufacturers to provide emission-related assembly instructions to ensure that the completed vehicle will be in a certified configuration.
- Specify parameters for determining a vehicle's curb weight, consistent with current practice for vehicles certified under 40 CFR part 86, subpart S.
- Revise the recordkeeping requirement to specify a uniform eight-year retention period for all data supporting an application for certification. The provision allowing for one-year retention for "routine data" is no longer necessary now that data collection is all recorded in electronic format. EPA is also clarifying that the eight-year retention period is calculated relative to the latest associated application for certification, not from the date the data were generated.
- Change the rounding for analytically derived CO<sub>2</sub> emission rates and target values from the nearest 0.1 g/mile to the nearest 1 g/mile.
- Clarify that manufacturers may not amend an application for certification after the end of the model year, other than to revise maintenance instructions or family emission limits, as allowed under the regulations. Remove the general recordkeeping provisions from 40 CFR 1037.735 that are already described in 40 CFR 1037.825.
- Require a different equation with a ratio of 0.8330 in 40 CFR 1037.521(f) when full yaw sweep measurements are used to determine wind averaged drag correction to establish an equivalent method to the equation using  $\pm 6$  degree measurements (note that this cite is proposed to be redesignated as 40 CFR 1037.525(d)). This proposed change would not impact stringency because manufacturers are already subject to compliance using both methods—full yaw sweep and  $\pm 6$  degree measurements. In addition, this Phase 1

flexibility was not used in setting the level of the Phase 1 standards.

- Clarify how EPA would conduct selective enforcement audits (SEAs) for engines (in 40 CFR 1036.301) and vehicles (in 40 CFR 1037.301) with respect to GHG emissions.

#### *B. Other Compliance Provisions for NHTSA*

##### (1) Standards and Credit Alignment

In Phase 1, the agencies intended GHG and fuel consumption standards for segments of the National Program to be in alignment so that manufacturers would not be required to build vehicles to meet in equivalent standards. Despite the intent, NHTSA and EPA have identified several scenarios where credits and compliance to both sets of standards are not aligned. This misalignment can have various impacts on compliance with the National Program.

For example, a manufacturer of tractors could have two vehicle families that with same number of vehicles but with opposite and equal compliance margins with standards. In this scenario, the first family would over-comply with the GHG standard while the second family would under-comply with the GHG standard by the same amount of grams CO<sub>2</sub>/ton-mile. In calculating credits, the manufacturer would have a net of zero GHG credits and exactly meet compliance; however, based on conversions and rounding of the standard and performance results that manufacturer could end up earning credits or having a credit deficit under NHTSA's fuel efficiency program.

In order to correct this misalignment, NHTSA is proposing to amend the existing fuel consumption standards and the method for calculating performance values for all compliance categories by increasing the significant digits in these conversion values. Increasing the significant digits in these values will result in more precise alignment when converting from GHG consumption standards to fuel consumption standards.

The rounding approach differs for heavy-duty pickup trucks and vans set apart from other vehicle and engine compliance categories. Heavy Duty Pickup Trucks and Vans (HD PUV) use the same approach for calculating standards and performance values as the LD CAFE and GHG programs. As such, NHTSA proposes to increase the required significant values for each components used in these calculations. More specifically, NHTSA proposes to increase the number of decimal places for sub-configuration target standards,

the sub-configuration fuel consumptions, the fleet average target standard and the fleet average fuel consumption values from two fixed values and increases them by one additional significant digit. The regulation currently specifies rounding to these values nearest 0.01 and under the proposed approach the values would be rounded to the nearest 0.001.

NHTSA is also proposing to modify the c and d target coefficients used for deriving HD PUV target standards. These values are directly convertible from the EPA a and b target coefficients, respectively. Currently, the c target coefficient contains six decimal places and the d target coefficient contains two decimal places. Each coefficient would be increased by one decimal—meaning the c target coefficient would have seven decimal places, with the last four being significant digits—and the d target coefficient would be increased to three decimal places, with there being a total of four significant digits. The modifications to the rounding and level of precision of these six values will not entirely eliminate the misalignment of the credits being calculated for EPA and NHTSA but will reduce it to an insignificant variance.

For other compliance categories, a similar approach can be used to address the misalignment of calculated credits as it pertains to vocational vehicles, tractors, and heavy duty engines. NHTSA proposes to increase the number of significant digits by increasing the decimal places contained in the standards and the FEL for the vocational vehicle and tractor segments and the FCL for the engine segments to four decimal places. Currently, the vocational vehicle and tractor standards and FELs contain one decimal place while engines standards and FELs contain two decimal places. The standards will be identified directly in the regulation while the FEL and FCL will be a calculated value rounded to the nearest 0.0001.

The modifications to the rounding and level of precision of these values should eliminate the misalignment of the credits being calculated.

These changes are planned for implementation retroactively starting for the model year 2013 standard. However, because the stringency of the Phase 1 fuel consumption standards may be adversely impacted for certain manufacturers who have already developed engineering plans considering previous credit balance, we propose to seek comments on whether optional compliance should be allowed.

## (2) Off-Road Exclusion Petition Process for Tractors and Vocational Vehicles

In the Phase 1 final rule, the agencies added provisions for certain types of vocational tractors and vocational vehicles that operate off-road to be exempt from standards, although standards would still apply to the engines installed in these vehicles. An exemption was warranted because these vehicles operate in a manner essentially making them incompatible with fuel saving and emission reduction technologies, such as performing work in an off-road environment, being speed restricted, or having off-road components or other features making them incompatible for roadways. For the Phase 1 program, off-road vehicle manufacturers meeting the exemption provisions are required to provide EPA and NHTSA, through the EPA database, a report within 90 days after the end of each model year identifying its off-road vehicles. The report must provide a description of each excluded vehicle configuration, including an explanation of why it qualifies for the exclusion and the production volume. A manufacturer having an off-road vehicle failing to meet the criteria under the agencies' off-road exemptions explained in 40 CFR 1037.631 and 49 CFR 523.6 is allowed to submit a petition as required in 49 CFR 535.8 describing how and why its vehicles should qualify for exclusion.

Under Phase 1 compliance processes, manufacturers have not been using the petitioning process when seeking clarification on off-road vehicles not meeting the strict interpretation of the provision. Instead, manufacturers are submitting information to EPA in advance of the end of the model year to determine whether or not these vehicles are exempted and to determine whether it is necessary to submit any applications for certificates of conformity as required by 40 CFR 1037.201. EPA and NHTSA collaboratively determine whether manufacturers are exempted and EPA shares the decision with the manufacturer. The current process followed by the agencies makes it unnecessary to use the petitioning process and has the added advantage of providing a joint determine early enough in the model year whereas disapproved manufacturer have adequate enough time to submit applications for certificates of conformity.

For the Phase 1 standards, the agencies are proposing to delete the petitioning process and add provisions for manufacturers seeking clarification on the qualifications of an off-road

vehicle exemption to send information to the agencies through EPA in advance of the model year in order for us to make an appropriate determination. EPA plans to add these provisions into its regulations as a part of 40 CFR 1037.150(h). Removal of the formal petition process is intended to minimize the impact on manufacturers that are seeking an off-road exemption while allowing the agencies to be proactive in making a determination based on the criteria and individual merits of the vehicles being requested for an exemption. Collaboration between the agencies in making a decision about exemptions outside a formal petition process should streamline the timing for a response and reduce the burden upon the agencies and manufacturers.

## (3) Innovative Technology Request Documentation Specifications

For vehicle and engine technologies that can reduce GHG and fuel consumption, but for which there is not yet an established method for quantifying reductions, the agencies encourage the development of such technologies through providing "innovative technology" credits. Manufacturers seeking innovative technology credits must quantify the reductions in fuel consumption and GHG emissions that the technology is expected to achieve, above and beyond those achieved on the existing test procedures.

Manufacturers submitting innovative technology requests must send a detailed description of the technology and a recommended test plan to EPA as detailed in 40 CFR 1036.610 and 40 CFR 1037.610. The test plan must include whether the manufacturer is applying for credits using the improvement factor method or the separate-credit method. It is recommended that manufacturers not conduct testing until the agencies can collaboratively approve the test plan in which a determination is made on the qualification of the technology as innovative. EPA and NHTSA also make the decision at that time whether to seek public comments on the test plan if there are unknown factors in the test methodology.

Under the current regulations, EPA and NHTSA have reviewed several test plans from manufacturers seeking innovative technology credits. The agencies have received feedback from manufacturers that the final approval process is not clearly defined, which has caused a substantial time commitment from manufacturers. To address this feedback, the agencies are proposing to add further clarification in 40 CFR 1036.610 and 40 CFR 1037.610

defining the steps manufacturers must follow after an approval is granted for a test plan. This includes specifications for submitting the final documentation to the agencies for final approval and for determining credit amounts. The agencies are adding the same level of detail as required for the final documentation required in EPA's light duty off-cycle program in 40 CFR 86.1869–12(e)(2). These specifications should provide manufacturers with a clear understanding of the required documentation and approval process to reduce the time burden placed on manufacturers.

NHTSA also proposes to add similar provisions from its light duty CAFE program specified in 49 CFR 531.6(b)(2) and 533(c)(2) for limiting the approval of innovative technologies under its program for those technologies related to crash-avoidance technologies, safety critical systems or systems affecting safety-critical functions, or technologies designed for the purpose of reducing the frequency of vehicle crashes. NHTSA prohibited credits for these technologies under any circumstances in its CAFE program (see 77 FR 62730). NHTSA believes a similar strategy is warranted for heavy-duty vehicle as well. Further, the evaluation of crash avoidance technologies is better addressed under NHTSA's vehicle safety authority than under a case-by-case innovative technology credit process.

#### (4) Credit Acquisition Plan Requirements

The National Program was designed to provide manufacturers with averaging, banking and trading (ABT) flexibilities for meeting the GHG and fuel efficiency standards to optimize the effectiveness of the program. As a part of these flexibilities, manufacturers generating a shortfall in fuel consumption credits for a given model year must submit a credit plan to NHTSA describing how it plans to resolve its deficits within 3 models year. To assist manufacturers, NHTSA is proposing to modify 49 CFR 535.9(a)(6) of its regulation to clarify and provide guidance to manufacturers on the requirements for a credit allocation plan which contains provisions to acquire credits from another manufacturer which will be earned in future model years.

The current regulations do not specify if future credit acquisition is permitted or not and the revision is intended to clarify that it is, with respect to the limitation a credit shortfall can only be carried forward three years. Providing this clarification is intended to increase transparency within the program and

ensure all manufacturers are aware of its available flexibilities.

In addition to providing this clarification, the regulation is also being amended to outline the requirement that in order for a credit allocation plan containing this provision to be reviewed for approval, NHTSA will require an agreement signed by both manufacturers. This requirement will assist NHTSA with its determination that the credits will become available to the acquiring manufacturer given they are earned.

#### (5) New Vehicle Field Inspections and Recordkeeping Requirements

Previously, NHTSA decided not to include recordkeeping provisions in its regulations for the Phase 1 program. EPA regulations include recordkeeping requirements in 40 CFR 1036.250, 1036.735, 1036.835, 1037.250, 1037.735, and 1037.835. For the Phase 2 program, NHTSA is proposing to add recordkeeping provisions to facilitate its compliance validation program. For the Phase 1 program, manufacturers test and conduct modeling to determine GHG emissions and fuel consumption performance, and EPA and NHTSA perform validation testing. EPA uses the results of the validation tests to create a finalized report that confirms the manufacturer's final model year GHG emissions and fuel consumption results. Each agency will use this report to enforce compliance with its standards.

NHTSA assesses compliance with fuel consumption standards each year, based upon EPA final verified data submitted to NHTSA for its heavy-duty vehicle fuel efficiency program established pursuant to 49 U.S.C. 32902(k). NHTSA may also conduct verification testing throughout a given model year in order to validate data received from manufacturers and will discuss any potential issues with EPA and the manufacturer. See 49 CFR 535.9. After the end of the model year, NHTSA may also decide to conduct field inspections in order to confirm whether or not a new vehicle was manufactured as originally certified. NHTSA may conduct field inspections separately or in coordination with EPA. To facilitate inspections, the agencies propose to add additional provisions to the EPA recordkeeping provisions to require manufacturers to keep build documents for each manufactured tractor or vocational vehicle. Each build document would be required to contain specific information on the design, manufacturing, equipment and certified components for a vehicle. NHTSA would request build documents through EPA and the agencies would collaborate

on the finding of all field inspections. Manufacturers would be required to keep records of build documents for a period of 8 calendar years.

#### XIV. Other Proposed Regulatory Provisions

In addition to the new GHG standards proposed in these rules, EPA and NHTSA are proposing to amend various aspects of the regulations as part of the HD GHG Phase 1 standards for heavy-duty highway engines and vehicles. EPA is also taking the opportunity to propose to amend regulatory provisions for other requirements that apply for heavy-duty highway engines, and for certain types of nonroad engines and equipment. NHTSA is also proposing to amend its regulations to require electronic submission of data for the CAFE program.

##### A. Proposed Amendments Related to Heavy-Duty Highway Engines and Vehicles

This section describes a range of proposed regulatory amendments for heavy-duty highway engines and vehicles that are not directly related to GHG emission standards. Section XIV.D describes additional changes related to test procedures that affect heavy-duty highway engines.

##### (1) Alternate Emission Standards for Specialty Heavy-Duty Vehicles

Motor vehicles conventionally comprise a familiar set of vehicles within a relatively narrow set of parameters—motorcycles, cars, light trucks, heavy trucks, buses, etc. The definition of “motor vehicle;” however, is written broadly to include a very wide range of vehicles. Almost any vehicle that can be safely operated on streets and highways is considered a motor vehicle. Development of EPA's emission control programs is generally focused on a consideration of the technology, characteristics, and operating parameters of conventional vehicles, and typically includes efforts to address concerns for special cases. For example, the driving schedule for light-duty vehicles includes a variation for vehicles that are not capable of reaching the maximum speeds specified in the Federal Test Procedure.

Industry innovation in some cases leads to some configurations that make it particularly challenging to meet regulatory requirements. We are aware that plug-in hybrid-electric heavy-duty vehicles are an example of this. An engine for such a vehicle would be expected to have a much lower power rating and duty cycle of engine speeds and loads than a conventional heavy-

duty engine. The costs of regulatory compliance and the mismatch to the specified duty cycle can make it cost-prohibitive for engine manufacturers to certify such an engine under the heavy-duty highway engine program. EPA's nonroad emission standards have reached a point that involves near parity with the level of emission control represented by the emission standards for heavy-duty highway engines.

To address concerns about certifying heavy-duty engines to highway standards for use in hybrid vehicles, we are therefore proposing to allow manufacturers of heavy-duty highway vehicles the option to install limited numbers of engines certified to alternate standards. Qualifying engines would be considered motor vehicle engines, but they would be certified to standards that are equivalent to those adopted for comparable nonroad engines. Vehicles with hybrid powertrains would be a focus of this allowance. EPA believes the same principles apply for amphibious vehicles and for vehicles with maximum speed at or below 45 miles per hour and we are therefore proposing to apply the same provisions to these additional vehicles.

Under this approach, compression-ignition engines could be certified to alternate standards that are equivalent to the emission standards under 40 CFR part 1039, and spark-ignition engines could be certified to alternate standards that are equivalent to the Blue Sky emission standards under 40 CFR part 1048. Engines meeting these alternate emission standards would generally be expected to use the same technologies to control emissions as engines certified to the applicable emission standards for heavy-duty highway engines. EPA would disallow this approach for compression-ignition engines below 56 kW since the nonroad standards for those engines are substantially less stringent than the standards that apply for heavy-duty highway engines. Also, since the nonroad duty cycles would generally better represent the in-use operating characteristics of these vehicles, we would expect the nonroad test procedures to be at least as effective in achieving effective in-use emission control. The regulations at 40 CFR part 1048 include a simplified form of diagnostic controls, and we are proposing in these rules to include simplified diagnostic controls for 40 CFR part 1039. These engine-based diagnostic controls would substitute for the diagnostic requirements that would otherwise apply under 40 CFR 86.010–18.

It may also be appropriate to allow manufacturers of such heavy-duty

vehicles to use an engine from a smaller vehicle that is already covered by chassis-based certification under 40 CFR part 86, subpart S. Many of the heavy-duty vehicles described under this section would be adequately powered by lower-displacement automotive engines, and the level of emission control would clearly be expected to match or exceed that of engines certified to the heavy-duty standards that would otherwise apply. However, engines used in chassis-certified vehicles involve some degree of calibration that relates engine operation to vehicle parameters. Adapting these engines to heavy-duty vehicles would therefore require some recalibration, which could involve changing the effectiveness of emission controls. It is also unclear how the heavy-duty vehicle would be designed for onboard diagnostic controls. EPA requests comment on the technical and regulatory issues surrounding the use of engines from chassis-certified vehicles in certain heavy-duty vehicles.

These alternate standards relate only to the engine certification-based emission standards and certification requirements. All vehicle-based requirements for evaporative and greenhouse gas emissions would continue to apply as specified in the regulation.

This allowance is intended to lower the barrier to introducing innovative technology for motor vehicles. It is not intended to provide a full alternative compliance path to avoid certifying to the emission standards and control requirements for highway engines and vehicles. To accomplish this, EPA is proposing to allow a manufacturer to produce no more than 1,000 hybrid vehicles in a single model year under this program, and no more than 200 amphibious vehicles or speed-limited vehicles.

California ARB is in the process of developing similar provisions for a reduced compliance burden for a limited number of highway vehicles toward the goal of incentivizing hybrid vehicles and other advanced technology. EPA expects to be involved in that policy development and would be interested in aligning programs as much as possible. It may be necessary or appropriate for the final rule to include a reference to any new policy that has been adopted by California ARB in the meantime.

EPA requests comment on all aspects of this program to create alternate motor-vehicle emission standards that allow certified nonroad engines to be used in the identified types of heavy-duty highway vehicles.

## (2) Chassis Certification of Class 4 Heavy-Duty Vehicles

In the HD Phase 1 rule, the agencies included a provision allowing manufacturers to certify Class 4 and larger heavy-duty vehicles to the chassis-based emission standards in 40 CFR part 86, subpart S. This applied for greenhouse gas emission standards, but not criteria emission standards. EPA revisited this issue in the recent Tier 3 final rule, where we revised the regulation to allow this same flexibility relative to exhaust emission standards for criteria pollutants. However, this change to the regulation conflicted with our response to a comment in that rulemaking that EPA should not change the certification arrangement for criteria pollutants.

Manufacturers have taken opposing views of the proper approach for vehicles above 14,000 lbs GVWR. EPA requests comment on how best to address this issue in a way that resolves the various and competing concerns. In particular, EPA requests comment on the following specific areas of interest:

- Should EPA treat 14,000 lbs as a bright line to disallow any certification of larger vehicles to the chassis-based exhaust emission standards?
- Should EPA allow for certifying the larger vehicles to the chassis-based standards, but identify certain criteria to narrow the scope of this allowance? For example, EPA could limit this to compression-ignition or spark-ignition engines, we could identify a maximum GVWR value above which chassis-based certification is not allowed, or EPA could limit this allowance to vehicles that share design characteristics with chassis-certified vehicles below 14,000 lbs GVWR (as California ARB has done).
- If EPA allows for certifying the larger vehicles to the chassis-based standards, what additional amendments are needed to clarify how to apply the requirements of 40 CFR part 86, subpart S? For example, some further specification may be needed to identify how to apply requirements related to emission standards, driving schedule, and emission credits?

## (3) On-Board Diagnostics for Heavy-Duty Vehicles

EPA defines the onboard diagnostic requirements for heavy-duty vehicles above 14,000 lbs GVWR in 40 CFR 86.010–18, but we allow manufacturers to meet OBD requirements based on the requirements adopted by the California Air Resources Board. Manufacturers in almost all cases certify based on the California procedures instead of EPA procedures. Certification based on EPA

procedures is limited to certain spark-ignition engine families whose certification is limited to states other than California. EPA requests comment on a change to EPA regulation that simply requires that manufacturers meet the California requirements. EPA has taken a similar approach for vehicles at or below 14,000 lbs GVWR, as described in 40 CFR 86.1806–17. Under this approach, EPA would recognize California ARB's approval as valid for EPA certification. EPA requests comment on this approach. In particular, EPA requests comment on the need to preserve EPA specifications for on-board diagnostics for any special situations, and on the need to make any adjustments or allowances from the California ARB regulations to work for EPA implementation.

#### (4) Nonconformance Penalties (NCPs)

The Clean Air Act requires that heavy-duty standards for criteria pollutants such as NO<sub>x</sub> must reflect the greatest degree of emission reduction achievable through the application of technology that EPA determines will be available. Such “technology-forcing” standards create the risk that one or more manufacturers may lag behind in the development of their technology to meet the standard and, thus, be forced out of the marketplace. Recognizing this risk, Congress enacted CAA section 206(g) (42 U.S.C. 7525(g)), which requires EPA to establish “nonconformance penalties” to protect these technological laggards by allowing them to pay a penalty for engines that temporarily are unable to meet the applicable emission standard, while removing any competitive advantage those technological laggards may have.

On September 5, 2012, EPA adopted final NCPs for heavy heavy-duty diesel engines that could be used by manufacturers of heavy-duty diesel engines unable to meet the current oxides of nitrogen (NO<sub>x</sub>) emission standard. On December 11, 2013, the U.S. Court of Appeals for the District of Columbia Circuit issued an opinion vacating that Final Rule. It issued its mandate for this decision on April 16, 2014, ending the availability of the NCPs for the current NO<sub>x</sub> standard, as well as vacating certain amendments to the NCP regulations due to concerns about inadequate notice. In particular, the amendments revise the text explaining how EPA determines when NCP should be made available. EPA is proposing to remove the vacated regulatory text specifying penalties, and re-proposing most of the other vacated amendments to provide fuller notice. Finally, EPA is proposing a new 40 CFR

86.1103–2016 to replace the existing 40 CFR 86.1103–87.

#### (a) Vacated Penalties

In EPA's regulations, NCP penalties are calculated from inputs specific to the standards for which NCPs are available. The input values are specified in 40 CFR 86.1105–87. EPA is proposing to remove paragraph (j) of this section which specifies the vacated inputs for the 2010 NO<sub>x</sub> emission standard. EPA does not request comment on this change because this text has already been vacated by the Court. Since all manufacturers are currently complying with these standards, the text also no longer has any purpose.

#### (b) Re-Proposed Text

The 2012 rule made amendments to four different sections in 40 CFR part 86. The amendments to 40 CFR 86.1104–91 and 86.1113–87 were supported during the rulemaking and were not questioned in the Court's decision. Nevertheless, these revisions were vacated along with the rest of the rule. EPA is re-proposing these changes. Since we are proposing to vacate and restore the regulatory text, the proposal consists of leaving these sections of the regulations unchanged.

#### (i) Upper Limits

The changes to 40 CFR 86.1104–91 affected the upper limit. The upper limit (UL) is the emission level established by regulation above which NCPs are not available. A heavy duty engine cannot use NCPs to be certified for a level above the upper limit. CAA section 206(g)(2) refers to the upper limit as a percentage above the emission standard, set by regulation, that corresponds to an emission level EPA determines to be “practicable.” The upper limit is an important aspect of the NCP regulations not only because it establishes an emission level above which no engine may be certified using NCPs, but it is also a critical component of the cost analysis used to develop the penalty rates. The regulations specify that the relevant costs for determining the COC50 and the COC90 factors are the difference between an engine at the upper limit and one that meets the applicable standards (see 40 CFR 86.1113–87).

The regulatory approach adopted under the prior NCP rules sets the upper limit at the prior emission standard when a prior emission standard exists and is then changed to become more stringent. EPA concluded that this upper limit should be reasonably achievable by all manufacturers with engines or vehicles in the relevant class.

It should be within reach of all manufacturers of HD engines or HD vehicles that are currently allowed so that they can continue to sell their engines and vehicles while finishing their development of fully complying engines. A manufacturer of a previously certified engine or vehicle should not be forced to immediately remove a HD engine or vehicle from the market when an emission standard becomes more stringent. The prior emission standard generally meets these goals because manufacturers have already certified their vehicles to that standard.

EPA proposes to revise the regulations in 40 CFR 86.1104–91 to clarify that EPA may set the upper limit at a level below the previous standard if we determine that the lower level is achievable by all engines or vehicles in the relevant subclass. This was the case for the vacated NCP rule. EPA also proposes that we may set the upper limit at a level above the previous standard in unusual circumstances, such as where a new standard for a different pollutant or other requirement effectively increases the stringency of the standard for which NCPs would apply. This occurred for heavy heavy-duty engines with the 2004 standards.

#### (ii) Payment of Penalties

The proposed changes to 40 CFR 86.1113–87 correct EPA organizational units and mail codes to which manufacturers must send information. The previous information is no longer valid.

#### (c) Criteria for the Availability of NCPs

Since the promulgation of the first NCP rule in 1985, subsequent NCP rules generally have been described as continuing “phases” of the initial NCP rule. The first NCP rule (Phase I), sometimes referred to as the “generic” NCP rule, established three basic criteria for determining the eligibility of emission standards for nonconformance penalties in any given model year (50 FR 35374, August 30, 1985). (For regulatory language, see 40 CFR 86.1103–87). The first criterion is that the emission standard in question must become more difficult to meet. This can occur in two ways, either by the emission standard itself becoming more stringent, or due to its interaction with another emission standard that has become more stringent. Second, substantial work must be required in order to meet the emission standard. EPA considers “substantial work” to mean the application of technology not previously used in that vehicle or engine class/subclass, or a significant modification of existing technology, in

order to bring that vehicle/engine into compliance. EPA does not consider minor modifications or calibration changes to be classified as substantial work. Third, EPA must find that a manufacturer is likely to be noncomplying for technological reasons (referred to in earlier rules as a “technological laggard”). Prior NCP rules have considered such a technological laggard to be a manufacturer who cannot meet a particular emission standard due to technological (not economic) difficulties and who, in the absence of NCPs, might be forced from the marketplace. During the 2012 rulemaking, some commenters raised issues relating to EPA’s interpretation of these criteria:

- The extent to which the criteria are intended to constrain EPA’s ability to set NCPs
- The timing for evaluating the criteria
- The meaning of technological laggard

#### (i) Constraints on EPA

Several commenters argued (implicitly or explicitly) that EPA cannot establish NCPs unless all of the regulatory criteria for NCPs (in 40 CFR 86.1103–87) are met. Some went further to argue that EPA must demonstrate that the criteria are met. However, the actual regulatory text has never stated that EPA may establish NCPs only if all criteria are met, but rather that EPA shall establish NCPs “provided that EPA finds” the criteria are met. These criteria were included in the regulations to clarify that manufacturers should not expect EPA to initiate a rulemaking to establish NCPs where these criteria were not met. Moreover, the regulations clearly defer to EPA’s judgment for finding that the criteria are met. While EPA must explain the basis of our finding, the regulatory language does not require us to prove or demonstrate that the criteria are met.

This interpretation is consistent with the text of the Clean Air Act, which places no explicit restrictions on when EPA can set NCPs. In fact, it seems to create a presumption that NCPs will be available. The Act actually requires EPA to allow certification of engines that do not meet the standard unless EPA determines the practicable upper limit to be equal to the new emission standard.

To address this confusion, the new proposed regulatory text would explicitly state that where EPA cannot determine if all of the criteria have been met, we may presume that they have. In other words, EPA does not have the burden to prove they have been met.

#### (ii) Timing for Evaluating Criteria

In order to properly understand the appropriate timing for evaluating each of the NCP criteria, it is necessary to understand the purpose of each. When considered together, these criteria evaluate the likelihood that a manufacturer will be technologically unable to meet a standard on time. However, when EPA initially proposed the NCP criteria, we noted that the first two criteria addressed whether there was a possibility for a technological laggard to develop. When the first criterion is met, it creates the possibility for a technological laggard to exist. When manufacturers must perform substantial work, it is possible that at least one will be unsuccessful and will become a laggard. Thus, when evaluating these first two criteria, the purpose is to determine whether the standard created the possibility for a laggard to exist. The third criterion is different because it asks whether that possibility has turned into a likelihood that a technological laggard has developed. For example, a standard may become significantly more stringent and substantial effort might be required for compliance, but all manufacturers may be meeting the applicable standard. In that situation, a technological laggard is not likely and penalties would be unnecessary.

In this context, it becomes clear that since the first two of these criteria are intended to address the question of whether a given standard creates the possibility for this to occur, they are evaluated before the third criterion that addresses the likelihood that the possibility will actually happen. In most cases, it is possible to evaluate these criteria at the point a new standard is adopted. This is the value of these criteria, that they can usually be evaluated long before there is enough information to know whether a technological laggard is actually likely. For example, where EPA adopts a new standard that is not technology-forcing, but rather merely an anti-backsliding standard, EPA could determine at the time it is adopted that the second criterion is not met so that manufacturers would know in advance that no NCPs will be made available for that standard.

One question that arose in the 2012 rule involved how to evaluate the second criterion if significant time has passed and some work toward meeting the standard has already been completed. To address this question, the proposed regulations would clarify that this criterion is to be evaluated based on actual work needed to go from meeting

the previous standard to meeting the current standard, regardless of the timing of such changes. EPA looks at whether “substantial work” is or was required to meet the revised standard at any time after the standard was issued—the important question is whether manufacturers who were using technology that met the previous standard would need to build upon that technology to meet the revised standard. Other interpretations would seem to be directly contrary to the purpose of the statute, which is designed to allow technological laggards to be able to certify engines even if other manufacturers have met the standard.

#### (iii) Technological Laggards

Questions also arose in 2012 about the meaning of the term “technological laggard”. While the regulations do not define “technological laggard”, EPA has previously interpreted this as meaning a manufacturer who cannot meet the emission standard due to technological difficulties, not merely economic difficulties (67 FR 51464–51465, August 8, 2002). Some have interpreted this to mean that NCPs cannot be made available where a manufacturer tries and fails to meet a standard with one technology but knew that another technology would have allowed them to meet the standard. In other words, that it made a bad business decision.

However, EPA’s reference to “economic difficulties” applies where a technological path exists—at the time EPA is evaluating the third criterion—that would allow the manufacturer to meet the standard on time, but the manufacturer chooses not to use it for economic reasons. The key question is whether or not the technological path exists at the time of the evaluation. To address this confusion, the proposed regulations would clarify that where there is uncertainty about whether a failure to meet the standards is a technological failure, EPA may presume that it was. Note that this does not mean that EPA might declare any failure to meet standards as a technological failure. It would only apply where it is not clear.

#### (5) In-Use Testing

EPA and manufacturers have gained substantial experience with in-use testing over the last four or five years. This has led to important insights in ways that the test protocol can be adjusted to be more effective. EPA is accordingly proposing to make the following changes to the regulations in 40 CFR part 86, subparts N and T:

- Revise the NTE exclusion based on aftertreatment temperature to associate

the exclusion with the specific aftertreatment device that does not meet the temperature criterion. For example, there should be no NO<sub>x</sub> exclusion if a diesel oxidation catalyst is below the temperature threshold. EPA is also proposing to revise the exclusion to include accommodation of CO emissions when there is a problem with low temperatures in the exhaust.

- Clarify that exhaust temperatures should be measured continuously to evaluate whether those temperatures stay above the 250 °C threshold.
- Add specifications to describe where to measure temperatures for exhaust systems with multiple aftertreatment devices.
- Include a provision to add 0.00042 g/hp-hr to the PM measurement to account for PM emissions vented to the atmosphere through the crankcase vent.
- Increase the time allowed for submitting quarterly reports from 30 to 45 days after the end of the quarter.

#### (6) Miscellaneous Amendments to 40 CFR Part 86

As described elsewhere, EPA is proposing to make several changes to 40 CFR part 86. This includes primarily the GHG standards for Class 2b and 3 heavy-duty vehicles in subpart S. EPA is also proposing changes related to hearing procedures, adjustment factors for infrequent regeneration of aftertreatment devices, and the testing program for heavy-duty in-use vehicles.

EPA is proposing to make several minor amendments to 40 CFR part 86, subpart A, including the following:

- Revise 40 CFR 86.1823 to extend the default catalyst thermal reactivity coefficient for Tier 2 vehicles to also apply for Tier 3 vehicles. This change was inadvertently omitted from the recent Tier 3 rulemaking. EPA is also interested in a broader review of the appropriate default value for the catalyst thermal reactivity coefficient. EPA would be interested in reviewing any available data related to this issue. In any case, EPA would plan to revisit this question in the future.
- Establish a minimum maintenance interval of 1500 hours for DEF filters for heavy-duty engines. This reflects the technical capabilities for filter durability and the expected maintenance in the field.
- Remove the idle CO standard from 40 CFR 86.007–11 and 40 CFR 86.008–10. This standard no longer applies, since all engines are now subject to diagnostic requirements instead of the idle CO standard.

EPA is also proposing several amendments to remove obsolete text, update cross references, and streamline

redundant regulatory text. For example, paragraph (f)(3) of Appendix I includes a duty cycle for heavy-duty spark-ignition engines that is no longer specified as part of the certification process.

#### (7) Applying 40 CFR Part 1068 to Heavy-Duty Highway Engines and Vehicles

As part of the Phase 1 standards, EPA applied the exemption and importation provisions from 40 CFR part 1068, subparts C and D, to heavy-duty highway engines and vehicles. EPA also specified that the defect reporting provisions of 40 CFR 1068.501 were optional. In an earlier rulemaking, EPA applied the selective enforcement auditing under 40 CFR part 1068, subpart E (75 FR 22896, April 30, 2010). EPA is proposing in this rule to adopt the rest of 40 CFR part 1068 for heavy-duty highway engines and vehicles, with certain exceptions and special provisions.

40 CFR part 1068 captures a range of compliance provisions that are common across our engine and vehicle programs. These regulatory provisions generally provide the legal framework for implementing a certification-based program. 40 CFR part 1068 works in tandem with the standard-setting part for each type of engine/equipment. This allows EPA to adopt program-specific provisions for emission standards and certification requirements for each type of engine/equipment while taking a uniform approach to the compliance provisions that apply generally.

Many of the provisions in 40 CFR part 1068 were originally written to align with the procedures established in 40 CFR part 85 and part 86. EPA expects the following provisions from 40 CFR part 1068 to not involve a substantive change for heavy-duty highway engines and vehicles:

- Part 1068, subpart A, describes how EPA handles confidential information, how the Administrator may delegate decision-making within the agency, how EPA may enter manufacturers' facilities for inspections, what information manufacturers must submit to EPA, and how EPA may require testing or perform testing. There is also a description of labeling requirements that apply uniformly for different types of engines/equipment.
- The prohibited acts, penalties, injunction provisions, and related requirements of 40 CFR 1068.101 and 1068.125 correspond to what is specified in Clean Air Act sections 203 through 207 (also see section 213(d)).
- 40 CFR 1068.103 describes how a certificate of conformity applies on a

model-year basis. With the exception of the stockpiling provisions in paragraph (f), as described below, these provisions generally mirror what already applies for heavy-duty highway engines.

- 40 CFR 1068.115 describes manufacturers' warranty obligations. EPA is proposing to amend this section to more carefully conform to the warranty provisions in Clean Air Act section 207, as described below. Note that EPA also includes a provision identifying the warranty requirements from Clean Air Act section 203(a)(4), which are specific to motor vehicles.

- 40 CFR 1068.120 describes requirements that apply for rebuilding engines. This includes more detailed provisions describing how the rebuild requirements apply for cases involving a used engine to replace a certified engine.

- 40 CFR part 1068, subpart F, describes procedural requirements for voluntary and mandatory recalls. As noted below, EPA is proposing to modify these regulations to eliminate a few instances where the part 1068 provisions differ from what is specified in 40 CFR part 86, subpart S.

- 40 CFR part 1068, subpart G, describes how EPA would hold a hearing to consider a manufacturer's appeal of an adverse compliance decision from EPA. These procedures apply for penalties associated with violations of the prohibited acts, recall, nonconformance penalties, and generally for decisions related to certification. As noted below, EPA is proposing to migrate these procedures from 40 CFR part 86, including an effort to align with EPA-wide regulations that apply in the case of a formal hearing.

Manufacturers are already required to use good engineering judgment in many cases related to certifying engines under 40 CFR part 86 (see 40 CFR 1068.5).

As noted above, the exemption provisions of 40 CFR part 1068, subpart C, already apply for heavy-duty highway engines. EPA is proposing to add a clarification that the exemption from the tampering prohibition for competition purposes does not apply to heavy-duty highway vehicles. This aligns with the statutory provisions for the racing exemption.

EPA is proposing to require that manufacturers comply with the defect-reporting provisions in 40 CFR 1068.501. Defect reporting under 40 CFR 1068.501 involves a more detailed approach for manufacturers to track possible defects and establishes thresholds to define when manufacturers must perform an investigation to determine an actual rate of emission-related defects. These



thresholds are scaled according to production volumes, which allows us to adopt a uniform protocol for everything from locomotives to lawn and garden equipment. Manufacturers that also produce nonroad engines have already been following this protocol for several years. These defect-reporting requirements are also similar to the rules that apply in California.

40 CFR part 1068 includes a definition of “engine” to clarify that an engine becomes subject to certification requirements when a crankshaft is installed in an engine block. At that point, a manufacturer may not ship the engine unless it is covered by a certificate of conformity or an exemption. Most manufacturers have opted into this definition of “engine” as part of the replacement engine exemption as specified in 40 CFR 85.1714. We are proposing to make this mandatory for all manufacturers. A related provision is the definition of “date of manufacture”, which we use to establish that an engine’s model year is also based on the date of crankshaft installation. To address the concern that engine manufacturers would install a large number of crankshafts before new emission standards start to apply as a means of circumventing those standards, we state in 40 CFR 1068.103(f) that manufacturers must follow their normal production plans and schedules for building engines in anticipation of new emission standards. In addition to that broad principle, we state that we will consider engines to be subject to the standards for the new model year if engine assembly is not complete within 30 days after the end of the model year with the less stringent standards (a longer time frame applies for engines with per-cylinder displacement above 2.5 liters).

40 CFR part 1068 also includes provisions related to vehicle manufacturers that install certified engines. EPA states in 40 CFR 1068.105(b) that vehicle manufacturers are in violation of the tampering prohibition if they do not follow the engine manufacturers’ emission-related installation instructions, we approve as part of the certification process.

40 CFR part 1068 also establishes that vehicles have a model year and that installing certified engines includes a requirement that the engine be certified to emission standards corresponding to the vehicle’s model year. An exception to allow for normal production and build schedules is described in 40 CFR 1068.105(a). This “normal-inventory” allowance is intended to allow for installation of previous-tier engines that are produced under a valid certificate by

the engine manufacturer shortly before the new emission standards start to apply. Stockpiling such engines would be considered an unlawful circumvention of the new emission standards. The range of companies and production practices is much narrower for heavy-duty highway engines and vehicles than for nonroad engines and equipment. EPA is therefore proposing a further set of specifications to define or constrain engine-installation schedules that would be considered to fall within normal-inventory practices. In particular, vehicle manufacturers are limited to three months of production, once new emission standards start to apply, to install previous-tier engines without EPA approval. For any subsequent installation of previous-tier engines, EPA is proposing to require that vehicle manufacturers get EPA approval based on a demonstration that the excess inventory was a result of unforeseeable circumstances rather than circumvention of emission standards. EPA is proposing that approval in those circumstances would be limited to a maximum of 50 engines to be installed for up to three additional months for a single vehicle manufacturer.

The existing prohibitions and exemptions in 40 CFR part 1068 related to competition engines and vehicles need to be amended to account for differing policies for nonroad and motor vehicle applications. In particular, we generally consider nonroad engines and vehicles to be “used solely for competition” based on usage characteristics. This allows EPA to set up an administrative process to approve competition exemptions, and to create an exemption from the tampering prohibition for products that are modified for competition purposes. There is no comparable allowance for motor vehicles. A motor vehicle qualifies for a competition exclusion based on the physical characteristics of the vehicle, not on its use. Also, if a motor vehicle is covered by a certificate of conformity at any point, there is no exemption from the tampering and defeat-device prohibitions that would allow for converting the engine or vehicle for competition use. There is no prohibition against actual use of certified motor vehicles or motor vehicle engines for competition purposes; however, it is not permissible to remove a motor vehicle or motor vehicle engine from its certified configuration regardless of the purpose for doing so.

It is relatively straightforward to apply the provisions of 40 CFR part 1068 to all engines subject to the criteria emission standards in 40 CFR part 86,

subpart A, and the associated vehicles. Manufacturers of comparable nonroad engines are already subject to all these provisions. Class 2b and 3 heavy-duty vehicles subject to criteria emission standards under 40 CFR part 86, subpart S, are covered by a somewhat different compliance program. EPA is therefore proposing to apply the provisions of 40 CFR part 1068 only as described in the next section for light-duty vehicles, light-duty trucks, medium-duty passenger vehicles, and chassis-certified Class 2b and 3 heavy-duty vehicles.

#### *B. Amendments Affecting Gliders and Glider Kits*

As noted in Sections III, and V the agencies are proposing not to exempt glider kits from the Phase 2 GHG emission and fuel consumption standards.<sup>877</sup> Gliders and glider kits are exempt from NHTSA’s Phase 1 fuel consumption standards. The EPA Phase 1 rules exempted gliders and glider kits produced by small businesses from CO<sub>2</sub> standards (see 40 CFR 1037.150(c)) but did not include such a blanket exemption for other gliders and glider kits. EPA is proposing to amend its rules applicable to engines installed in glider kits, a proposal which would affect emission standards not only for GHGs but for criteria pollutants as well. NHTSA is also considering including gliders under its Phase 2 standards. Finally, EPA believes glider manufacturers may not understand how existing EPA regulations apply to them or otherwise are not complying with existing requirements, resulting in a number of uncertified vehicles. Therefore, EPA is also proposing to clarify its requirements for certification and to revise its definitions for glider manufacturers as described below.

It is important to emphasize that EPA is not proposing to ban gliders. Rather, as is described below, EPA proposing to restrict the number of gliders that may be produced using engines not meeting current standards.

EPA requests comment on its proposed amendments and clarifications regarding gliders. Commenters are encouraged to include technological information and production data for the current glider market, as well as for past practices. Commenters opposing the proposed provisions are also encouraged to suggest alternate approaches that would prevent glider kits from being used to

<sup>877</sup> Glider vehicles are motor vehicles produced to accept rebuilt engines (or other used engines) along with used axles and/or transmissions. The common commercial term “glider kit” is used here primarily to refer to a chassis into which the used/rebuilt engine is installed.



circumvent the current emission standards.

#### (1) Background Under the Clean Air Act

EPA notes that under the anti-tampering provisions of the Clean Air Act, and under EPA's regulatory requirements applicable to rebuilding engines (see 40 CFR 86.004–40), rebuilt engines must continue to comply with emission standards applicable to the model year for which they were originally certified. These regulations specifically apply to rebuilt engines independent of the vehicle into which they are installed or reinstalled. As a general matter, EPA has considered the question of whether the vehicle into which the rebuilt engine is installed is a “new motor vehicle” separately from the status of the engine. The use of a rebuilt or other previously used engine in an otherwise newly manufactured vehicle (such as a glider kit) does not keep the vehicle from being “new” under the Clean Air Act. (Or, phrased positively, a newly manufactured vehicle remains “new” even if a rebuilt engine is installed in it.) This issue became of increased practical import with the advent of separate vehicle (*i.e.* non-engine) standards for GHGs in the Phase 1 rule. Thus, before MY 2014, EPA did not have separate standards for vehicles over 14,000 lbs GVWR. However, EPA Phase 1 GHG vehicle standards apply for new MY 2014 and later vehicles over 14,000 lbs. Thus, EPA generally considers glider kits to be subject to the Phase 1 vehicle standards, and to have been subject to them from the advent of the Phase 1 program.

However, with respect to engines installed in glider kits, an EPA Phase 1 provision in 40 CFR 1037.150(j) provided an exception allowing the use of used or rebuilt engines<sup>878</sup> that were certified to model year 2013 or earlier (or model year 2015 or earlier for spark ignition engines). The effect of this transition provision during Phase 1 was to allow glider kits to use engines not certified to meet the engine GHG or fuel consumption standards, although the glider kits were still required to have an EPA *vehicle* certificate with respect to GHG emissions. In addition, another provision of Phase 1 in 40 CFR 1037.150(c) exempted gliders and glider kits produced by small businesses from the need to obtain a vehicle certificate, but did not include such a blanket exemption for non-small business gliders and glider kits. Thus, depending

on the size of the business producing the glider kit, gliders and glider kits may currently be subject to the requirement to obtain a vehicle certificate prior to introduction into commerce as a new vehicle.

#### (2) Proposed Amendment to EPA Vehicle Standards

EPA is proposing to end both 40 CFR 1037.150 provisions. EPA's proposed program would generally treat glider vehicles the same as other new vehicles. As a result, glider vehicles would have to be certified to the Phase 2 vehicle standards, which (among other things) would require a fuel map for the actual engine in order to run GEM. In other words, manufacturers producing glider kits would need to meet the applicable GHG vehicle standards and, as part of its compliance demonstration, would need to have a fuel map for each engine that would be used.

EPA is proposing this provision because we believe there has been adequate time for glider manufacturers to transition to a compliance regime. Moreover, as noted more fully below, with increased numbers of glider kits being produced, perpetuation of the interim exemption from Phase 1 would turn a transition provision into an ongoing loophole. Nevertheless, EPA is proposing to replace this provision with a limited allowance for small business manufacturers as described in the proposed 40 CFR 1037.635. EPA is also proposing new definitions of “glider vehicle” and “glider kit” in 40 CFR 1037.801 that are generally consistent with the common understanding of these terms as meaning new chassis with a used engine or designed to accept a used engine.

#### (3) Proposed Change to EPA Engine Standards

EPA is also proposing to amend its rules to require that engines used in glider vehicles must be certified to the standards applicable to the calendar year in which assembly of the glider vehicle is completed. This requirement would apply to all pollutants, and thus would encompass criteria pollutant standards as well as GHG standards. Used or rebuilt engines could be used, as long as they had been certified to the same standards as apply for the calendar year of glider vehicle assembly. For example, if assembly of a glider vehicle was completed in calendar year 2020, the engine standards applicable to MY 2020 engines would have to be satisfied. (If the engine standards for model year 2020 were the same as for model years 2017 through 2019, then any model year 2017 or later engine could be used.)

EPA is proposing to amend these rules because, with the advent in MY 2007 of more stringent HD diesel engine criteria pollutant standards, continuation of provisions allowing rebuilt and reused engines to meet earlier MY criteria pollutant standards results in unnecessarily high in-use emissions. GHG emissions from these engines also are controllable. As more glider kits are produced, EPA believes that these emissions should be controlled to the same levels as other new engines.

Since EPA has already justified the criteria pollutant emission standards for heavy duty diesel engines pursuant to CAA section 202 (a)(3)(C), it is not clear that any further justification for applying those standards to engines used in glider kits is needed. The GHG engine standards for Phase 1 have likewise already been justified, and the proposed Phase 2 engine standards' justification is set out in Section II above. If any further justification is required, EPA notes that the emission benefits of applying current criteria pollutant standards would be substantial, and at low cost. Glider vehicle production is not being reported to EPA, and we cannot determine precisely how much of an emission impact these vehicles are having. Nevertheless, since the current standards for NO<sub>x</sub> and PM are at least 90 percent lower than the most stringent previously applicable standards, we can be certain that the NO<sub>x</sub> and PM emissions of any glider vehicles using pre-2007 engines are at least ten times as high as emissions from equivalent vehicles being produced with brand new engines.<sup>879</sup> Thus, each glider vehicle that is purchased instead of a new vehicle with a current MY engine results in significantly higher in-use emissions. EPA recognizes that the environmental impacts of gliders using 2010 and later engines would be much smaller, and requests comment on whether we should treat such gliders differently than gliders using older engines.

These emission impacts are being compounded by the increasing sales of these vehicles. Estimates provided to EPA indicate that production of glider vehicles has increased by an order of magnitude from what it was in the 2004–2006 time frame—from a few

<sup>878</sup> Most glider vehicles being produced today are assembled with rebuilt engines. However, it is also possible to use previously used engines that are not rebuilt.

<sup>879</sup> The NO<sub>x</sub> and PM standards for MY 2007 and later engines are 0.20 g/hp-hr and 0.01 g/hp-hr, respectively. The standards for MY 2004 through 2006 engines were ten times these levels, and earlier standards were even higher.

hundred each year to thousands.<sup>880</sup> While the few hundred glider vehicles produced annually in the 2004–2006 timeframe may have been produced for arguably legitimate purposes such as salvaging powertrains from vehicles otherwise destroyed in accidents, EPA believes the tenfold increase in glider kit production since the MY 2007 criteria pollutant emission standards took effect reflects an attempt to circumvent these more stringent standards and (ultimately) the Clean Air Act.

The cost for manufacturers to comply with the vehicle-based GHG standards is similar for gliders as for other new vehicles. Similar to EPA's analysis of emissions above, although we cannot precisely quantify the cost of complying with the proposed engine requirements for criteria pollutant standards because it is dependent on which engines would be used and which would have otherwise been used, EPA nevertheless believes that cost-effectiveness (dollars per ton) of the proposed requirement relative to any pre-2007 engine would be similar to the cost-effectiveness of the NO<sub>x</sub> and PM standards for current model year engines, which EPA has already found to be cost effective.

The agencies (as well as the broader SBAR Panel) are, however, concerned about adverse economic impacts on small businesses that assemble gliders and build glider kits, and we recognize that production of a smaller number of gliders by these small manufacturers may be appropriate for salvaged engines or other non-circumvention purposes. Therefore, EPA is proposing a new provision that would preserve its regulatory status quo for existing small businesses, but cap annual production based on recent sales. Thus, a limited number of glider kits produced by small businesses would not have to meet the GHG vehicle standards, and could use rebuilt or used engines provided those engines were certified to the year of the engine's manufacture. For example, an existing small business that produced between 100 and 200 glider vehicles per year would be allowed to produce up to 200 glider vehicles per year under without having to certify them to the GHG standards, or re-certifying the engines to the now-applicable EPA standards for criteria pollutants and GHGs (so long as the engine is certified to criteria pollutant standards for the year of its manufacture). To be eligible for this provision, EPA is also proposing that no small entity could produce more

than 300 glider vehicles in any given model year without certifying (or recertifying) to any EPA standards. EPA believes that this level reflects the upper end of the range of production that occurred before significant circumvention of the 2007 criteria pollutant standards began. We request comment on the appropriate caps (including the appropriate magnitude of the caps) and on whether any other special provisions would be needed to accommodate glider kits. EPA also requests comment on whether we should allow larger manufacturers to produce some limited number of glider kits.

#### (4) Lead Time for Amended Standards

EPA is proposing that this requirement for gliders to meet engine and vehicle standards applicable to other new vehicles and engines take effect on January 1, 2018. EPA believes this provides sufficient time to “permit the development and application of the requisite control measures” (CAA section 202 (a)(3)(D)) because compliant engines are available today, although manufacturers would need several months to change business practices to comply. EPA also solicits comment on whether an earlier or later compliance date would be appropriate. We also request comment on whether we should include a production limit if we provide additional lead time in the Final Rule.

#### (5) Legal Authority and Definitions Under the Clean Air Act

With respect to statutory authority under the Clean Air Act, EPA notes first that it has broad authority to control all pollutant emissions from “any” rebuilt heavy duty engines (including engines beyond their statutory useful life). See CAA section 202(a)(3)(D). EPA is to give “appropriate” consideration to issues of cost, energy, and safety in developing such standards, and to provide necessary lead time to implement those standards. As noted above, if a used engine is placed in a glider kit, the engine would be considered a “new motor vehicle engine” because it is being used in a new motor vehicle (as explained in the following paragraph). See CAA section 216(3). With respect to the vehicle-based GHG standards, there is no question that the completed glider is a “motor vehicle” under the Clean Air Act (as well as under NHTSA's safety provisions). Some in the trucking industry have questioned whether a glider kit (without an engine) is a motor vehicle. However, EPA considers glider kits to be incomplete motor vehicles, and EPA has the authority to regulate

incomplete motor vehicles, including unmotorized chassis.

Under the CAA, it is also important that “new” is determined based on legal title and does not consider prior use. Thus, glider kits that have a new vehicle identification number (VIN) and new title are considered to be “new motor vehicles” even if they incorporate previously used components. Note that under the Clean Air Act, EPA would not consider the fact that a vehicle retained the VIN of the donor vehicle from which the engine was obtained determinative of whether or not the vehicle is new.

The CAA also defines “manufacturer” to include any person who assembles new motor vehicles. EPA is proposing to revise its regulatory definitions of these terms in 40 CFR 1036.801 and 1037.801 to more clearly reflect these aspects of the CAA definitions—that glider kits are “new motor vehicles”, previously used engines (whether rebuilt or not) installed into glider kits are “new motor vehicle engines”, and any person who completes assembly of a glider is a “manufacturer”. EPA also notes that under the existing 40 CFR 1037.620, glider kit assemblers would generally be considered to be secondary vehicle manufacturers. That section, which EPA is proposing to redesignate as 40 CFR 1037.622, allows secondary vehicle manufacturers that have a valid certificate or exemption to receive incomplete vehicles (such as glider kits) from OEMs.

To further clarify that EPA considers both glider kits and completed glider vehicles to be motor vehicles, EPA is proposing to add a clarification to our definition of “motor vehicle” in 40 CFR 85.1703 regarding vehicles such as gliders that clearly are intended for use on highways, consistent with the CAA definition of “motor vehicle” in CAA section 216 (2). The regulatory definition presently contains a provision stating that vehicles lacking certain safety features required by state or federal law are not “motor vehicles”. This caveat needs a proper context: Is the safety feature one that would prevent operation on highways. If not, absence of that feature does not result in the vehicle being other than a motor vehicle. The proposed amendment would consequently make clear that vehicles that are clearly intended for operation on highways are motor vehicles, even if they do not have every safety feature. (EPA is also considering whether to simply eliminate the clause “or safety features required by state and/or federal law” from the regulatory definition.) This clarifying provision would take effect upon promulgation.

<sup>880</sup> “Industry Characterization of Heavy Duty Glider Kits”, MacKay & Company, September 30, 2013.

We note that NHTSA and EPA have separate definitions for motor vehicles under their separate statutory authorities. As such, EPA's determination of how its statute and regulations apply to glider kits and glider vehicles has no bearing on how NHTSA may apply its safety authority with regard to them. See Section XIV. B. (6) for additional discussion of NHTSA's consideration of glider vehicles.

#### (6) Relation to NHTSA Fuel Efficiency Program and Safety Regulations

NHTSA does not consider glider kits to be motor vehicles, but it does consider assembled glider vehicles to be motor vehicles. As stated above, NHTSA is considering including glider vehicles under its Phase 2 standards. NHTSA seeks comments from glider manufacturers on this consideration.

We believe that the agencies potentially having different policies for glider kits and glider vehicles under the Phase 2 program would not result in problematic disharmony between the NHTSA and EPA programs, because of the small number of vehicles that would be involved. EPA believes that its proposed changes would result in the glider market returning to the pre-2007 levels, in which fewer than 1,000 glider vehicles would be produced in most years. Given that a large fraction of these vehicles would be exempted from EPA regulations because they would be produced by qualifying small businesses, they would thus, in practice, be treated the same under EPA and NHTSA regulations. Only non-exempt glider vehicles would be subject to different requirements under the NHTSA and EPA regulations. However, we believe that this is unlikely to exceed a few hundred vehicles in any year, which would be few enough not to result in any meaningful disharmony between the two agencies.

With regard to NHTSA's safety authority over gliders, the agency notes that it has become increasingly aware of potential noncompliances with its regulations applicable to gliders. NHTSA has learned of manufacturers who are creating glider vehicles that are new vehicles under 49 CFR 571.7(e), however, the manufacturers are not certifying them and obtaining a new VIN as required. NHTSA plans to pursue enforcement actions as applicable against noncompliant manufacturers. In addition to enforcement actions, NHTSA may consider amending 49 CFR 571.7(e) and related regulations as necessary. NHTSA believes manufacturers may not be

using this regulation as originally intended.

#### C. Applying the General Compliance Provisions of 40 CFR Part 1068 to Light-Duty Vehicles, Light-Duty Trucks, Chassis-Certified Class 2B and 3 Heavy-Duty Vehicles and Highway Motorcycles

As described above, EPA is proposing to apply all the general compliance provisions of 40 CFR part 1068 to heavy-duty engines and vehicles. EPA proposes to also apply the recall provisions and the hearing procedures from 40 CFR part 1068 for highway motorcycles and for all vehicles subject to standards under 40 CFR part 86, subpart S. See the preceding section for a description of how the provisions from 40 CFR part 1068 compare to those in 40 CFR part 85 and part 86.

EPA also requests comment on applying the rest of the provisions from 40 CFR part 1068 to highway motorcycles and to all vehicles subject to standards under 40 CFR part 86, subpart S. EPA particularly requests comment on applying the defect-reporting provisions in 40 CFR 1068.501 to these vehicles. The general approach is to replace a fixed threshold of 25 defects as the basis for defect reporting with a scaled approach that would require defect reporting only after the manufacturer finds some larger number of actual emission-related defects. The regulation calls for manufacturers to monitor possible emission-related defects as evidenced by warranty claims, in-use testing, and other indicators, and to start investigating for actual defects once possible defects exceed an established threshold. The existing regulation in 40 CFR 1068.501 generally calls for investigating once possible defects exceed 5 to 10 percent of production, with a requirement to report defects if confirmed defects exceed a rate of 1 to 2 percent of production. The percentage thresholds that apply for a given engine/vehicle model decrease with increasing production volumes. This approach is similar to defect-reporting requirements that already apply in California. Manufacturers may be interested in complying with a single set of defect-reporting provisions nationwide; EPA therefore also requests comment on simply requiring manufacturers to follow the California defect-reporting scheme for their EPA-certified vehicles.

Note that EPA is proposing to amend 40 CFR 85.1701 to specify that the exemption provisions apply to heavy-duty engines subject to regulation under 40 CFR part 86, subpart A. This is intended to limit the scope of this

provision so that it does not apply for Class 2b and 3 heavy-duty vehicles subject to standards under 40 CFR part 86, subpart S. This change corrects and inadvertently broad reference to heavy-duty vehicles in 40 CFR 85.1701.

#### D. Amendments to General Compliance Provisions in 40 CFR Part 1068

The general compliance provisions in 40 CFR part 1068 apply broadly to many different types of engines and equipment. This section describes how EPA is proposing to amend these procedures to make various corrections and adjustments.

##### (1) Hearing Procedures

EPA is proposing to update and consolidate its regulations related to formal and informal hearings in 40 CFR part 1068, subpart G. This will allow us to rely on a single set of regulations for all the different categories of vehicles, engines, and equipment that are subject to emission standards. EPA also made an effort to write these regulations for improved readability.

The hearing procedures specified in 40 CFR part 1068 apply to the various categories of nonroad engines and equipment (along with the other provisions of part 1068). EPA is proposing in these rules to apply these hearing procedures also to heavy-duty highway engines, light-duty motor vehicles, and highway motorcycles. EPA believes there is no reason to treat any of these sectors differently regarding hearing procedures.

EPA is proposing an introductory section that provides an overview of requesting a hearing for all cases where a person or a company objects to an adverse decision by the agency. In certain circumstances, as spelled out in the regulations, a person or a company can request a hearing before a Presiding Officer. Statutory provisions require formal hearing procedures for administrative enforcement actions seeking civil penalties. The Clean Air Act does not require a formal hearing for other agency decisions; EPA is therefore proposing to specify that informal hearing procedures apply for all such decisions.

The introductory section also adds detailed provisions describing the requirements for submitting information to the agency in a timely manner. These provisions accommodate current practices for electronic submission, distinguish between postal and courier delivery and provide separate requirements for shipments made from inside and outside the United States. The specified deadlines are generally based on the traditional approach of a

postmark determining whether a submission is timely or not. Fax, email and courier shipments are similarly specified as needing to be sent by close of business on the day of the deadline. A different approach applies for shipments originating from outside the United States. Because time in transit can vary dramatically, we are proposing to specify that foreign shipments need to be received in our office by the specified deadline to be considered timely. Given the option to send documents by email or by fax, EPA expects this approach would not pose any disadvantage to anyone making an appeal from outside the United States.

EPA is proposing to replace the current reference to 40 CFR 86.1853–01 for informal hearings with a full-text approach that captures this same material. EPA attempted to write these proposed regulations in a way that would not change the underlying hearing protocol.

The regulations currently reference the formal hearing procedures in 40 CFR 85.1807, which were originally drafted to apply to light-duty motor vehicles. After we adopted the hearing procedures in 40 CFR 85.1807, EPA's Office of Administrative Law Judges finalized a set of regulations defining formal hearing procedures that were intended to apply broadly across the agency for appeals under every applicable statute. *See* 40 CFR part 22, "Consolidated Rules of Practice Governing the Administrative Assessment of Civil Penalties and the Revocation/Termination or Suspension of Permits." EPA is therefore revising the regulations in 40 CFR part 1068 to simply refer to these formal hearing procedures in 40 CFR part 22.

## (2) Additional Changes to General Compliance Provisions

EPA is also proposing to make numerous changes across 40 CFR part 1068 to correct errors, to add clarification, and to make adjustments based on lessons learned from implementing these regulatory provisions. This includes the following proposed changes:

- § 1068.1: Clarify applicability of part 1068 with respect to legacy parts (such as 40 CFR parts 89 through 94).
- § 1068.20: Clarify that EPA's inspection activities do not depend on having a warrant or a court order. As noted in the standard-setting parts, EPA may deny certification or suspend or revoke certificates if a manufacturer denies EPA entry for an attempted inspection or other entry.
- § 1068.27: Clarify that EPA confirmatory testing may properly be

performed before issuance of a certificate of conformity. We are also making an addition to state that we may require manufacturers to give us any special components that are needed for EPA testing.

- § 1068.30: Add definitions of "affiliated companies", "parent company", and "subsidiaries" to clarify how small-business provisions apply for a range of business relationships.

- § 1068.30: Clarify that a manufacturer can be considered a certificate holder based on the current or previous model year (to avoid problems from having a gap between model years).

- § 1068.30: Spell out contact information for the "Designated Compliance Officer" to clarify how manufacturers should submit information to the agency. This includes email addresses for the various sectors.

- § 1068.32: Add discussion to establish the meaning of various terms and phrases for EPA regulations; for example, we distinguish between standards, requirements, allowances, prohibitions, and provisions. EPA is also clarifying terminology with respect to singular/plural, inclusive lists, notes and examples in the regulatory text, and references to "general" or "typical" circumstances. EPA also describes some of the approach to determining when "unusual circumstances" apply.

- § 1068.45: Allow manufacturers to use coded dates on engine labels; allow EPA to require the manufacturer to share information to read the coded information.

- § 1068.45: Clarify that engine labels are information submissions to EPA.

- § 1068.101 and 1068.125: Update penalty amounts to reflect changes to 40 CFR part 19.

- § 1068.101: Revise the penalty associated with the tampering prohibition to be an engine-based penalty, as opposed to assessing penalties per day of engine operation. This correction aligns with Clean Air Act section 205.

- § 1068.103: Clarify the process for reinstating certificates after suspending, revoking, or voiding.

- § 1068.103: Clarify that the prohibition against "offering for sale" uncertified engines applies only for engines already produced. It is not a violation to invite customers to buy engines as part of an effort to establish the economic viability of producing engines, as would be expected for market research.

- § 1068.105: Require documentation related to "normal inventory" for stockpiling provision. EPA is also clarifying that there is no specific

deadline associated with producing "normal-inventory" engines under this section, but emphasizing that vehicle/equipment manufacturers may not delay engine installation beyond their normal production schedules. EPA is also clarifying that the allowance related to building vehicles/equipment in the early part of a model year, before the start of a new calendar year corresponding to new emission standards, applies only in cases where vehicle/equipment assembly is complete before the start of the new calendar year. This is intended to prevent manufacturers from circumventing new standards by initiating production of large numbers of vehicles/equipment for eventual completion after new standards have started to apply.

- § 1068.115: Clarify warranty provisions to align with statute.

- § 1068.120: Describe how the rebuilding provisions apply in the case of engine replacements where the new and old engines are subject to standards under different standard-setting parts (such as switching from spark-ignition to compression-ignition nonroad engines).

- § 1068.201: Describe how someone may sell an engine under a different exemption than was originally intended or used.

- § 1068.210: Remove the requirement for companies getting approval for a testing exemption to send us written confirmation that they meet the terms and conditions of the exemption. We do not believe this submission is necessary for implementing the testing exemption.

- § 1068.220: Add description of how we might approve engine operation under the display exemption. This is intended to more carefully address circumstances in which engine operation is part of the display function in question. We would want to consider a wide range of factors in considering such a request; for example, we could be more inclined to approve a request for a display exemption if the extent of operation is very limited, or if the engine/equipment has emission rates that are comparable to what would apply absent the exemption. EPA is also removing the specific prohibition against generating revenue with exempted engines/equipment, since this has an unclear meaning and we can take any possible revenue generation into account in considering whether to approve the exemption on its merits.

- § 1068.230: Add provision allowing for engine operation under the export exemption only as needed to prepare it for export (this has already been in

place in part 85, and in part 1068 for engines/equipment imported for export).

- § 1068.235: Clarify that the standard-setting part may set conditions on an exemption for competition engines/equipment.

- § 1068.240: Describe the logistics for identifying the disposition of engines being replaced under the replacement engine exemption. In particular, manufacturers would need to identify the disposition of each engine by the due date for the report under § 1068.240(c) to avoid counting them toward the production limit for untracked replacement engines. We are proposing to delay the due date for the report until September 30 following the production year to allow more time for manufacturers to make these determinations.

- § 1068.240: Clarify the relationship between paragraphs (d) and (e).

- § 1068.250: Simplify the deadline for requesting small-volume hardship.

- § 1068.255: Clarify that hardship provisions for equipment manufacturers are not limited to small businesses, and that a hardship approval is generally limited to a single instance of producing exempt equipment for up to 12 months.

- § 1068.260: State that manufacturers shipping engines without certain emission-related components need to identify the unshipped components either with a performance specification (where applicable) or with specific part numbers. We are also listing exhaust piping before and after aftertreatment devices as not being emission-related components for purposes of shipping engines in a certified configuration.

- §§ 1068.260 and 1068.262: Revise the text to clarify that provisions related to partially complete engines have limited applicability in the case of equipment subject to equipment-based exhaust emission standards (such as recreational vehicles). These provisions are not intended to prevent the sale of partially complete equipment with respect to evaporative emission standards. We intend to address this in the future by changing the regulation in 40 CFR part 1060 to address this more carefully.

- § 1068.262: Revise text to align with the terminology and description adopted for similar circumstances related to shipment of incomplete heavy-duty vehicles under 40 CFR part 1037.

- § 1068.301: Revise text to more broadly describe importers' responsibility to submit information and store records and explicitly allow electronic submission of EPA

declaration forms and other importation documents.

- § 1068.305: Remove the provision specifying that individuals may need to submit taxpayer identification numbers as part of a request for an exemption or exclusion for imported engines/equipment. We do not believe this information is necessary for implementing the exemption and exclusion provisions.

- § 1068.315: Allow for destroying engines/equipment instead of exporting them under the exemption for importing engines/equipment for repairs or alterations.

- § 1068.315: Remove the time constraints on approving extensions to a display exemption for imported engines/equipment. EPA would continue to expect the default time frame of one year to be appropriate, and extension of one to three years is sufficient for most cases; however, we are aware that there are occasional circumstances calling for a longer-term exemption. For example, an engine on display in a museum might appropriately be exempted indefinitely once its place in a standing exhibition is well established.

- § 1068.315: Specify that engines under the ancient engine exemption must be *substantially* in the original configuration.

- § 1068.360: Clarify the provisions related to model year for imported products by removing a circularity regarding "new" engines and "new" equipment.

- § 1068.401: Add explicit statement that SEA testing is at manufacturer's expense. This is consistent with current practice and the rest of the regulatory text.

- § 1068.401: Allow for requiring manufacturers other than the certificate holder to perform selective enforcement audits in cases where multiple manufacturers are cooperatively producing certified engines.

- § 1068.401: State that SEA non-cooperation may lead to suspended or revoked certificate (like production-line testing).

- § 1068.415: Set up new criteria for lower SEA testing rate based on engine power to allow for a reduced testing rate of one engine per day only for engines with maximum engine power above 560 kW, but keep the allowance to approve a lower testing rate; that may be needed, for example, if engine break-in (stabilization) and testing are performed on the same dynamometer. EPA believes it is more appropriate to base reduced testing rates on engine characteristics rather than sales volumes, as has been done in the past.

- § 1068.415: Revise the service accumulation requirement to specify a maximum of eight days for stabilizing a test engine. This is necessary to address a situation where an engine operates only six hours per day to achieve stabilization after well over 50 hours.

For such cases, we would expect manufacturers to be able to run engines much more than six hours per day. As with testing rates, manufacturers may ask for our approval to use a longer stabilization period if circumstances don't allow them to meet the specified service accumulation targets.

- § 1068.501, and Appendix I: Clarify that "emission-related components" include components whose failure *would commonly* increase emissions (not might increase), and whose *primary* purpose is to reduce emissions (not sole purpose); current regulations are not consistent.

- § 1068.501: Add "in-use testing" to list of things to consider for investigating potential defects.

- § 1068.505: Clarify that manufacturers subject to a mandatory recall must remedy noncompliant target vehicles without regard to their age or mileage at the time of repair, consistent with provisions that already apply under 40 CFR part 85.

- § 1068.505: Revise the requirement for submitting a remedial report from a 60-day maximum to a 45-day minimum (or 30-day minimum in the event of a hearing). This adjusted approach already applies to motor vehicles under 40 CFR part 85.

- § 1068.515: Clarify an ambiguity to require that manufacturers identify the facility where repairs or inspections are performed.

- § 1068.530: Specify that recall records must be kept for five years, rather than three years. This is consistent with longstanding recall policy for motor vehicles and motor vehicle engines under 40 CFR part 85.

Manufacturers and equipment operators have raised an additional question about how the regulations apply for replacement engines where the replacement engine is of a different type than the engine being replaced. For example, someone operating a piece of industrial equipment may want to replace an old spark-ignition engine with a compression-ignition engine (or vice versa). The replacement engine could be freshly manufactured, or it may have already been placed into service. The tampering prohibition would generally disallow "disabling emission controls," but regulations do not directly address how this applies relative to the multiple emission standards that apply. It is important to

note that the standard-setting part often specifies that a used replacement engine becomes new (and subject to certification requirements) if it is installed in a piece of equipment from a different category. For example, installing a used heavy-duty highway engine in land-based nonroad equipment would make the engine “new” and subject to certification requirements as a nonroad engine. This does not apply for spark-ignition engines and compression-ignition engines installed in heavy-duty highway vehicles, or for spark-ignition engines and compression-ignition engines installed in land-based nonroad equipment. We request comment on the best approach to delineating how the tampering prohibition should apply for these scenarios.

#### *E. Amendments to Light-Duty Greenhouse Gas Program Requirements*

EPA is proposing to make minor changes to correct errors and clarify regulations in 40 CFR part 86, subpart S, and 40 CFR part 600 relating to EPA’s light-duty greenhouse gas emission standards. This includes the following proposed changes:

- § 86.1818–12: Correct a reference in paragraph (c)(4) and clarify that CO<sub>2</sub>-equivalent debits for N<sub>2</sub>O and CH<sub>4</sub> are calculated in Megagrams and rounded to the nearest whole Megagram.
- § 86.1838–01: Correct references in paragraph (d)(3)(iii).
- § 86.1866–12: Correct a reference in paragraph (b).
- § 86.1868–12: Clarify language in the introductory paragraph explaining the model years of applicability of different provisions for air conditioning efficiency credits. In paragraph (e)(5) clarify that the engine-off specification of 2 minutes is intended to be cumulative time. In paragraphs (f)(1), (g)(1), and (g)(3), clarify language by pointing to the definitions in § 86.1803–01.
- § 86.1869–12: Make corrections to the language for readability in paragraph (b)(2). In paragraph (b)(4)(ii) delete the phrase “backup/reverse lights” because these lights were not intended to be part of the stated eligibility criteria for high-efficiency lighting credits. Correct references in paragraph (f).
- § 86.1870–12: Add language that clarifies that a manufacturer that meets the minimum production volume thresholds with a combination of mild and strong hybrid electric pickup trucks is eligible for credits.
- § 86.1871–12: Clarify that credits from model years 2010–2015 are not limited to a life of 5 model years. A recent rule extended the life of 2010–

2015 credits to model year 2021; thus, language referring to a 5-year life for emission credits generated in these model years is being removed or revised.

- § 600.113–12: Correct language in paragraph (m)(1), which relates to vehicles operating on LPG, that erroneously refers to methanol and methanol-fueled.
- § 600.113–12: Correct references in paragraph (n) and add a new paragraph (m) that reinstates language mistakenly dropped by a previous regulation.
- § 600.116–12: Correct description of physical quantity to refer to “energy” rather than “current”, and correct various paragraph references.
- § 600.208–12: Correct a reference in paragraph (a)(2)(iii).
- § 600.210–12: Correct a reference and text in paragraph (c)(2)(iv)(C).

#### *F. Amendments to Highway and Nonroad Test Procedures and Certification Requirements*

##### *(1) Testing With Aftertreatment Devices Involving Infrequent Regeneration*

Manufacturers generally rely on selective catalytic reaction and diesel particulate filters to meet EPA’s emission standards for highway and nonroad compression-ignition engines. These emission control devices typically involve infrequent regeneration, which can have a significant effect on emission rates. EPA has addressed that for each engine type by provisions for infrequent regeneration factors; this is a calculation methodology that allows manufacturers to incorporate the effect of infrequent regeneration into reported emission values whether or not that regeneration occurs during an emission test. EPA adopted separate provisions for highway, locomotive, marine, and land-based nonroad compression-ignition engines. EPA is proposing to harmonize the common elements of these procedures in 40 CFR part 1065, and to add clarifying specifications in each of the standard-setting parts for sector-specific provisions.

##### *(2) Mapping for Constant-Speed Engines Under 40 CFR Part 1065*

EPA is proposing to revise this section as it applies to the two-point mapping method for certain constant-speed engines. The regulations currently cite a performance parameter in ISO 8528–5 that does not apply for the design of these engines.

Common practice for engines that produce electric power is to use an isochronous governor for stand-alone generator sets. In some parallel

operations of multiple generator sets, droop is added as a method for load sharing. The amount of droop can be tuned by the generator set manufacturer or the site system integrator. Such engines are commonly tested on an engine dynamometer with the isochronous governor.

Mapping with just two points works well for the case of 0 percent droop (*i.e.* isochronous governor). For this case, a persistent speed error is forced on the engine governor on the second point and this will cause the governor to wind up to its maximum command. The second point is effectively operating on the torque curve instead of the isochronous governor. So, the second point captures the full fueling torque (plus a small amount due to any rising torque curve). This measured torque is used as the maximum test torque for computing the emission test points. Since there is no designed-in droop, some target amount of speed error is needed for the second point. The regulation at 40 CFR 1065.510(d)(5)(iii) currently has a default target speed on the second point of 97.5 percent of the no-load speed measured on the first point. This results in a persistent speed error of 2.5 percent of the no-load speed. For an 1800 rpm no-load speed, this would give a target speed of 1755 rpm and a 45 rpm speed error on an isochronous governor. If the engine has a torque rise of 20 percent from 1800 to 1200 rpm (0.0333 percent torque rise per rpm), this 45 rpm error will cause a 1.5 percent of point error in the determination of the intended maximum test torque. This error is larger than desired for this type of testing. Fortunately, engines and test cells have sufficient speed resolution to select a lower speed error, which reduces this error in maximum test torque. In practice, testing with a speed error at or below 0.5 percent is more than adequate to cause the isochronous governor to wind up to maximum fueling. Using a target speed of 99.5 percent on the second point gives a target speed of 1791 rpm for an 1800 rpm no-load speed and will reduce the error on the maximum test torque to a reasonable 0.3 percent of point for the 20 percent torque rise case described above.

For governors with droop, if we attempt the two-point method, we would have to calculate a target speed for the second point based on a designed amount of droop. Unfortunately, the actual governor may not have the same amount of droop as the design droop, which may cause error in the measured torque versus the maximum test torque associated with a

complete torque map. Also, the design droop may be based on a torque value that is different from the intended maximum test torque. Thus, the two-point method is not sufficient to yield a maximum test torque equivalent to the value that would be obtained using a multi-point map. Also the allowed speed error on the second point is 20 percent of the speed droop, which allows an unacceptably large error in the maximum test torque.

Thus, for the reasons listed, we are proposing to limit the two-point mapping method to any isochronous governed engines, not just engines used to generate electric power.

### (3) Calculating Maximum and Intermediate Test Speeds Under 40 CFR Part 1065

EPA is proposing to improve the method for calculating maximum and intermediate test speeds by applying a more robust calculation method. The new calculation method would be consistent with the methodology used for the maximum test torque determination, which we revised in our light-duty Tier 3 rulemaking. Under the current regulations, the result is a measured maximum test torque at one of the map points. The proposed calculation method involves interpolation to determine the measured maximum test torque, yielding a more representative maximum test torque lbs.

### (4) Additional Test Procedure Amendments

EPA is proposing the following additional changes to test procedures in 40 CFR part 1065 and part 1066:

- § 1065.15: Allow manufacturers to use NMOG measurements to demonstrate compliance with NMHC standards. We also request comment on whether other forms of hydrocarbon standards (such as VOC) should be allowed for alternative fuels.
- § 1066.210: Revise the dynamometer force equation to incorporate grade, consistent with the coastdown procedures being proposed for heavy-duty vehicles. For operation at a level grade, the additional parameters cancel out of the calculation.
- § 1066.605: Adding an equation to the regulations to spell out how to calculate emission rates in grams per mile. This calculation is generally assumed, but we want to include the equation to remove any uncertainty about calculating emission rates from mass emission measurements and driving distance.
- § 1066.815: Create an exception to the maximum value for overall residence time for PM sampling

methods that involve PM samples collected for combined bags over a duty cycle. This is needed to accommodate the reduced sample flow rates associated with these procedures.

### *G. Amendments Related to Nonroad Diesel Engines in 40 CFR Part 1039*

EPA is proposing two changes to 40 CFR 1039.5 to clarify the scope and applicability of standards under 40 CFR part 1039. First, EPA is stating that engines using the provisions of 40 CFR 1033.625 for non-locomotive-specific engines remain subject to certification requirements as nonroad diesel engines under 40 CFR part 1039. Such engines would need to be certified as both locomotive engines and as nonroad diesel engines. Second, EPA is proposing to revise the statement about how manufacturers may certify under 40 CFR part 1051 for engines installed in recreational vehicles (such as all-terrain vehicles or snowmobiles). EPA is proposing to remove text that might be interpreted to mean that there are circumstances in which certification under neither part is required. The proper understanding of EPA's policy in that regard is that certification under one part is a necessary condition for being exempted from the other part.

In 2008, EPA adopted a requirement in 40 CFR part 1042 for manufacturers to design marine diesel engines using selective catalytic reduction with basic diagnostic functions to ensure that these systems were working as intended (73 FR 37096, June 30, 2008). EPA is proposing to apply those same diagnostic control requirements to nonroad diesel engines regulated under 40 CFR part 1039. This addresses the same fundamental concern that engines would not be controlling emissions consistent with the certified configuration if the engine is lacking the appropriate quantity and quality of reductant. While some lead time would be needed to make the necessary modifications, we believe it will be straightforward to apply the same designs from marine diesel engines to land-based nonroad diesel engines. EPA is accordingly proposing that manufacturers meet the proposed diagnostic specifications starting with model year 2018. These diagnostic controls would not affect the current policy related to adjustable parameters and inducements related to selective catalytic reduction. EPA requests comment on adding these diagnostic requirements for nonroad diesel engines.

EPA is proposing to make numerous changes across 40 CFR part 1039 to correct errors, to add clarification, and

to make adjustments based on lessons learned from implementing these regulatory provisions. This includes the following proposed changes:

- § 1039.2: Add a clarifying note to say that something other than a conventional "manufacturer" may need to certify engines that become new after being placed into service (such as engines converted from highway or stationary use). This is intended to address a possible assumption that only conventional manufacturers can certify engines.
- §§ 1039.30, 1039.730, and 1039.825: Consolidate information-collection provisions into a single section.
- § 1039.107: Remove the reference to deterioration factors for evaporative emissions, since there are no deterioration factors for demonstrating compliance with evaporative emission standards.
- § 1039.104(g): Correct the specified FEL cap for an example scenario illustrating how alternate FEL caps work.
- § 1039.120: Reduce extended-warranty requirements to warranties that are actually provided to the consumer, rather than to any published warranties that are offered. The principle is that the emission-related warranty should not be less effective for emission-related items than for items that are not emission-related.
- § 1039.125: Allow for special maintenance procedures that address low-use engines. For example, owners of recreational marine vessels may need to perform engine maintenance after a smaller number of hours than would otherwise apply based on the limited engine operation over time.
- § 1039.125: Establish a minimum maintenance interval of 1500 hours for DEF filters. This reflects the technical capabilities for filter durability and the expected maintenance in the field.
- § 1039.125: Add fuel-water separator cartridges as an example of a maintenance item that is not emission-related.
- § 1039.135: Allow for including optional label content only if the manufacturer does not opt to omit other information based on limited availability of space on the label, and identify counterfeit protection as an additional item that manufacturers may include on the label.
- § 1039.201: Clarify that manufacturers may amend their application for certification after the end of the model year in certain circumstances, but they may not produce engines for a given model year after December 31 of the named year.



- § 1039.201: Establish that manufacturers may deliver to EPA for testing an engine that is identical to the test engine used for certification. This may be necessary if the test engine has accumulated too many hours, or if it is unavailable for any reason.
- § 1039.205: Replace the requirement to submit data from invalid tests with a requirement to simply notify EPA in the application for certification if test was invalidated.
- § 1039.205: Add a requirement for manufacturers to include in their application for certification a description of their practice for importing engines, if applicable. Note that where a manufacturers' engines are imported through a wide variety of means, EPA would not require this description to be comprehensive. In such cases, a short description of the predominant practices would generally be sufficient. We are also proposing to require manufacturers of engines below 560 kW to name a test lab in the United States for the possibility of us requiring tests under a selective enforcement audit. We have adopted these same requirements in many of our other nonroad programs.
- § 1039.225: Clarify that manufacturers may amend the application for certification after the end of the model year only in certain circumstances, and not to add a new or modified engine configuration.
- § 1039.235: Add an explicit allowance for carryover engine families to include the same kind of within-family running changes that are currently allowed over the course of a model year. The original text may have been understood to require that such running changes be made separate from certifying the engine family for the new model year.
- §§ 1039.235, 1039.240, and 1039.601: Describe how to demonstrate compliance with dual-fuel and flexible-fuel engines. This generally involves testing with each separate fuel, or with a worst-case fuel blend.
- § 1039.240: Add instructions for calculating deterioration factors for sawtooth deterioration patterns, such as might be expected for periodic maintenance, such as cleaning or replacing diesel particulate filters.
- § 1039.240: Remove the instruction related to calculating NMHC emissions from measured THC results, since this is addressed in 40 CFR part 1065.
- § 1039.250: Remove references to routine and standard tests, and remove the shorter recordkeeping requirement for routine data (or data from routine tests). All test records must be kept for eight years. With electronic recording of

test data, there should be no advantage to keeping the shorter recordkeeping requirement for a subset of test data. EPA also notes that the eight-year period restarts with certification for a new model year if the manufacturer uses carryover data.

- § 1039.255: Clarify that rendering information false or incomplete after submitting it is the same as submitting false or incomplete information. For example, if there is a change to any corporate information or engine parameters described in the manufacturer's application for certification, the manufacturer must amend the application to include the new information.

- § 1039.255: Clarify that voiding certificates for a recordkeeping or reporting violation would be limited to certificates that relate to the particular recordkeeping or reporting failure.

- § 1039.505: Correct the reference to the ISO C1 duty cycle for engines below 19 kW.

- § 1039.515: Correct the cite to 40 CFR 86.1370.

- §§ 1039.605 and 1039.610: Revise the reporting requirement to require detailed information about the previous year, rather than requiring a detailed projection for the year ahead. The information required in advance would be limited to a notification of plans to use the provisions of these sections.

- § 1039.640: Migrate engine branding to § 1068.45.

- § 1039.701 1039.730: Describe the process for retiring emission credits. This may be referred to as donating credits to the environment.

- § 1039.705: Change terminology for counting engines from "point of first retail sale" to "U.S.-direction production volume." This conforms to the usual approach for calculating emission credits for nonroad engines.

- § 1039.710: Clarify that it is not permissible to show a proper balance of credits for a given model by using emission credits from a future model year.

- § 1039.730: Clarify terminology for ABT reports.

- § 1039.740: Clarify that the averaging-set provisions apply for credits generated by Tier 4 engines, not for credits generated from engines subject to earlier standards that are used with Tier 4 engines.

- § 1039.801: Update the contact information for the Designated Compliance Officer.

- § 1039.801: Revise the definition of "model year" to clarify that the calendar year relates to the time that engines are produced under a certificate of conformity.

- § 1039.815: Migrate provisions related to confidential information to 40 CFR part 1068.

EPA requests comment on removing regulatory provisions for Independent Commercial Importers in 40 CFR part 1039. These provisions, copied from highway regulations many years ago, generally allow for small businesses to modify small numbers of uncertified products to be in a certified configuration using alternative demonstration procedures. We are not aware of anyone using these provisions for nonroad engines in the last 15 years or more. We are therefore interested in considering these provisions to be obsolete, in which case they can be removed without consequence.

#### *H. Amendments Related to Marine Diesel Engines in 40 CFR Parts 1042 and 1043*

EPA's emission standards and certification requirements for marine diesel engines under the Clean Air Act are identified in 40 CFR part 1042.

#### *(1) Continuous NO<sub>x</sub> Monitoring and On-Off Controls*

Manufacturers may produce certain marine diesel engines with on-off features that disable NO<sub>x</sub> controls when the ship is operating outside of a designated Emission Control Area (ECA) as long as certain conditions are met (§ 1042.115(g)). This provision, which applies to Category 3 engines meeting EPA Tier 3 standards, is intended to address the special operating conditions posed by an ECA and allows a ship that operates in and out of designated ECAs to downgrade engine NO<sub>x</sub> emission controls while the ship is operating outside of a designated ECA. This provision also applies for Tier 4 NO<sub>x</sub> standards for those Category 1 and Category 2 auxiliary engines on Category 3 vessels covered by § 1042.650(d); this provision does not apply to any other auxiliary engines or to any non-Category 3 propulsion engines. Engines with allowable on-off controls must be certified to meet the previous tier of NO<sub>x</sub> standards when the advanced NO<sub>x</sub> control strategies are disabled (note that this would be Tier 2 for auxiliary engines as well as Category 3 engines, pursuant to § 1042.650(d)).

Engines with on-off NO<sub>x</sub> controls are required to be equipped to continuously monitor NO<sub>x</sub> concentrations in the exhaust (§ 1042.110(d)). EPA has been asked to clarify what "continuous" means in the context of this requirement. Because the purpose of this requirement is to show that the engine complies with the NO<sub>x</sub> emission limits on a continuous basis, continuous



monitoring must be frequent enough to demonstrate that the NO<sub>x</sub> controls are on and are properly functioning from the time the ship enters the ECA until it leaves, which, depending on the ECA and the ship's itinerary, could be a matter of hours or days. Since many manufacturers equip their emission control systems with NO<sub>x</sub> sensors to monitoring and log the performance of the combined engine and emission control system, we are proposing that continuous monitoring means measuring NO<sub>x</sub> emissions at least every 60 seconds. EPA is also proposing that a manufacturer may request approval of an alternative measurement period if that is necessary for sufficiently accurate measurements. With regard to the functioning of continuous NO<sub>x</sub> monitoring, the continuous emission measurement device would be required to be included as part of the engine system for EPA certification. Continuous NO<sub>x</sub> monitoring would be required to be engaged before the ship enters an ECA and continue until after it exits the ECA. Verification of operation of the system would be included in required periodic vessel surveys and certification that cover nearly all commercial U.S. vessels. Enforcement is expected to be performed on a periodic basis by appropriate authorities when a ship is in port.

It should be noted that the above provisions with respect to on-off controls and continuous emission monitoring do not apply for the 40 CFR part 1042 PM standards. Engines certified to standards under 40 CFR part 1042 must meet the PM limits at all times, except when the operator has applied for and received permission to disable Tier 4 PM controls while operating outside the United States pursuant to any of the provisions of 40 CFR 1042.650(a) through (c).

#### (2) Category 1 and Category 2 Auxiliary Engines on Category 3 Vessels

The regulation at 40 CFR 1042.650(d) exempts auxiliary Category 1 and Category 2 engines installed on U.S.-flag Category 3 vessels from the part 1042 standards if those auxiliary engines meet certain conditions. This provision is intended to facilitate compliance with MARPOL Annex VI by certain qualified Category 3 vessels engaged in international trade and to simplify compliance demonstrations while those vessels are operating in foreign ports and foreign waters. EPA is proposing two revisions to make clear that the engines on the Category 3 vessel must remain in compliance with Annex VI, and EPA is providing clarifying

language relating to engines with a power output of 130 kW or less.

First, EPA is proposing to revise the regulations to clarify that the urea reporting requirements in § 1042.660(b) (which requires an owner or operator of any vessel equipped with SCR to report to EPA within 30 days of any operation of such vessel without the appropriate reductant) also apply to Category 1 and Category 2 auxiliary engines on Category 3 vessels that are covered by § 1042.650(d). This will extend the urea reporting requirements to engines between 130 and 600 kW if they rely on SCR to meet the Annex VI Tier III NO<sub>x</sub> limits. Engines covered by § 1043.650(d) would be subject to emission standards and testing requirements under MARPOL Annex VI and the NO<sub>x</sub> Technical Code.

Second, EPA is proposing to revise 40 CFR 1042.650(d) to clarify that, while these Category 1 and Category 2 auxiliary engines may be designed with on-off NO<sub>x</sub> controls, Annex VI requires that the engines be certified to meet IMO Tier II NO<sub>x</sub> standards anytime the IMO Tier III NO<sub>x</sub> configuration is disabled.

EPA has become aware that there is some uncertainty about how the scope of EPA's implementation of Annex VI through 40 CFR part 1043 relates to engines with a power output of 130 kW or less. The existing regulations at § 1043.30 state that an EIAPP certificate is required for engines with a power output above 130 kW, but the standards described in § 1043.60 might be interpreted to apply to engines of all sizes. EPA did not intend to appear to create additional requirements or authority under part 1043 that is not contained in Annex VI or its implementing legislation (the Act to Prevent Pollution from Ships). EPA is therefore proposing to add clarifying language to § 1043.60, consistent with Regulation 13 of Annex VI and APPS, to indicate that the international NO<sub>x</sub> limits do not apply to engines with a power output of 130 kW or less. Note that EPA therefore may not issue EIAPP certificates for engines with a power output of 130 kW or less even if manufacturers request it; this also means that such auxiliary engines are not eligible for an exemption under § 1042.650(d).

#### (3) Natural Gas Marine Engines

EPA is also proposing to expand provisions that apply for marine engines designed to operate on both diesel fuel and natural gas. Test requirements apply separately for each "fuel type". EPA generally considers an engine with a single calibration strategy that

combines an initial pilot injection of diesel fuel to burn natural gas to be a single fuel type. This applies even if the natural gas portion must be substantially reduced or eliminated to maintain proper engine operation at light-load conditions. If the engine has a different calibration allowing it to run only on diesel fuel, or on continuous mixtures of diesel fuel and natural gas, we would consider it to be a dual-fuel engine or a flexible-fuel engine, respectively. These terms are used consistently across EPA programs for highway and nonroad applications. There is an effort underway to revise the definition of "dual-fuel" in MARPOL Annex VI, which may be different than EPA's definition. It should be noted that the 40 CFR part 1042 certification testing requirement differs from that specified in MARPOL Annex VI and the NO<sub>x</sub> Technical Code. While the international protocol involves testing only on the engine calibration with the greatest degree of diesel fuel, EPA certification requires manufacturers to perform testing on each separate fuel type. This would involve one set of tests with natural gas (with or without a diesel pilot fuel, as appropriate), and an additional set of tests with diesel fuel alone. This has been required since we first adopted standards, and this is the same policy that applies across all our emission control programs. EPA also proposes to include amended regulatory language to more carefully describe these testing requirements, and to specify how this applies differently for dual-fuel and flexible-fuel engines.

#### (4) Additional Marine Diesel Amendments

EPA is proposing to make numerous changes across 40 CFR part 1042 to correct errors, to add clarification, and to make adjustments based on lessons learned from implementing these regulatory provisions. This includes the following proposed changes:

- § 1042.1: Correct the tabulated applicability date for engines with per-cylinder displacement between 7 and 15 liters; this should refer to engines "at or above" 7 liters, rather than "above 7 liters".
- § 1042.1: Replace an incorrect reference to 40 CFR part 89 with a reference to 40 CFR part 94 for marine engines above 37 kW.
- § 1042.2: Add a clarifying note to say that something other than a conventional "manufacturer" may need to certify engines that become new after being placed into service (such as engines converted from highway or stationary use). This is intended to address a possible assumption that only

conventional manufacturers can certify engines.

- §§ 1042.30, 1042.730, and 1042.825: Consolidate information-collection provisions into a single section.

- § 1042.101: Revise the text to more carefully identify engine subcategories and better describe the transition between Tier 3 and Tier 4 standards. These changes are intended to clarify which standards apply and are not intended to change the emission standards for any particular size or type of engine.

- § 1042.101 and Appendix III: More precisely define applicability of specific NTE standards for different types of engines and pollutants; correct formulas defining NTE zones and subzones; and add clarifying information to identify subzone points that could otherwise be derived from existing formulas. None of these changes are intended to change the standards, test procedures, or other policies for implementing the NTE standards.

- § 1042.101: Clarify the FEL caps for certain engines above 3700 kW.

- § 1042.101: Add a specification to define “continuous monitor” for parameters requiring repeated discrete measurements, as described above. The proposal also includes further clarification on the relationship between on-off NO<sub>x</sub> controls and engine diagnostic systems.

- § 1042.110: Remove the requirement to notify operators regarding an unsafe operating condition, since we can more generally rely on the broader provision in § 1042.115 that prohibits manufacturers from incorporating design strategies that introduce an unreasonable safety risk during engine operation.

- § 1042.120: Reduce extended-warranty requirements to warranties that are actually provided to the consumer, rather than to any published warranties that are offered. The principle is that the emission-related warranty should not be less effective for emission-related items than for items that are not emission-related.

- § 1042.125: Allow for special maintenance procedures that address low-use engines. For example, owners of recreational marine vessels may need to perform engine maintenance after a smaller number of hours than would otherwise apply based on the limited engine operation over time.

- § 1042.125: Establish a minimum maintenance interval of 1500 hours for DEF filters. This reflects the technical capabilities for filter durability and the expected maintenance in the field.

- § 1042.135: Clarify that ULSD labeling is required only for engines that

use sulfur-sensitive technology. If an engine can meet applicable emission standards without depending on the use of ULSD, the manufacturer should not be required to state on the engine that ULSD is required.

- § 1042.135: Allow for including optional label content only if the manufacturer does not opt to omit other information based on limited availability of space on the label.

- § 1042.201: Clarify that manufacturers may amend their application for certification after the end of the model year in certain circumstances, but they may not produce engines for a given model year after December 31 of the named year.

- § 1042.201: Establish that manufacturers may deliver to EPA for testing an engine that is identical to the test engine used for certification. This may be necessary if the test engine has accumulated too many hours, or if it is unavailable for any reason.

- §§ 1042.205 and 1042.840: Replace the requirement to submit data from invalid tests with a requirement to simply notify EPA in the application for certification if test was invalidated.

- § 1042.225: Clarify that manufacturers may amend the application for certification after the end of the model year only in certain circumstances, and not to add a new or modified engine configuration.

- § 1042.235: Add an explicit allowance for carryover engine families to include the same kind of within-family running changes that are currently allowed over the course of a model year. The original text may have been understood to require that such running changes be made separate from certifying the engine family for the new model year.

- §§ 1042.235, 1042.240, and 1042.601: Describe how to demonstrate compliance with dual-fuel and flexible-fuel engines. This generally involves testing with each separate fuel, or with a worst-case fuel blend.

- § 1042.240: Add instructions for calculating deterioration factors for sawtooth deterioration patterns, such as might be expected for periodic maintenance, such as cleaning or replacing diesel particulate filters.

- § 1042.250: Remove references to routine and standard tests, and remove the shorter recordkeeping requirement for routine data (or data from routine tests). All test records must be kept for eight years. With electronic recording of test data, there should be no advantage to keeping the shorter recordkeeping requirement for a subset of test data. EPA also notes that the eight-year period restarts with certification for a

new model year if the manufacturer uses carryover data.

- § 1042.255: Clarify that rendering information false or incomplete after submitting it is the same as submitting false or incomplete information. For example, if there is a change to any corporate information or engine parameters described in the manufacturer's application for certification, the manufacturer must amend the application to include the new information.

- § 1042.255: Clarify that voiding certificates for a recordkeeping or reporting violation would be limited to certificates that relate to the particular recordkeeping or reporting failure.

- § 1042.302: Clarify that manufacturers may fulfill the requirement to test each Category 3 production engine by performing the test before or after the engine is installed in the vessel. The largest Category 3 engines are assembled in the vessel, but some smaller Category 3 engines are assembled at a manufacturing facility where they can be more easily tested. Manufacturers must perform such testing on fully assembled production engines rather than relying on test results from test bed engines.

- § 1042.501: Remove test procedure specifications that are already covered in 40 CFR part 1065.

- § 1042.505: Correct the reference to the ISO C1 duty cycle in 40 CFR part 1039.

- § 1042.515: Remove an incorrect cite.

- §§ 1042.605 and 1042.610: Revise the reporting requirement to require detailed information about the previous year, rather than requiring a detailed projection for the year ahead. The information required in advance would be limited to a notification of plans to use the provisions of these sections.

- § 1042.630: Clarify that dockside examinations are not inspections. Vessels subject to Coast Guard inspection are identified in 46 U.S.C. 3301.

- § 1042.640: Migrate engine branding to § 1068.45.

- § 1042.650: Clarify that vessel operators may modify certified engines if they will be operated for an extended period outside the United States where ULSD will be unavailable. This does not preclude the possibility of vessel operators restoring engines to a certified configuration in anticipation of bring the vessel back to the United States.

- § 1042.660: Identify the contact information for submitting reports related to operation without SCR reductant.

- § 1042.670: Specify that gas turbine engines are presumed to have an equivalent power density below 35 kW per liter of engine displacement; this is needed to identify which Tier 3 standards apply.

- § 1042.701: Clarify that emission credits generated under 40 CFR part 94 may be used for demonstrating compliance with the Tier 3 and Tier 4 standards in 40 CFR part 1042.

- §§ 1042.701 and 1042.730: Describe the process for retiring emission credits. This may be referred to as donating credits to the environment.

- § 1042.705: Change terminology for counting engines from “point of first retail sale” to “U.S.-direction production volume.” This conforms to the usual approach for calculating emission credits for nonroad engines.

- § 1042.710: Clarify that it is not permissible to show a proper balance of credits for a given model by using emission credits from a future model year.

- § 1042.730: Clarify terminology for ABT reports.

- § 1042.810: Clarify that it is only the remanufacturing standards of subpart I, not the certification standards that are the subject of the applicability determination in § 1042.810.

- § 1042.830: Add a provision to specifically allow voluntary labeling for engines that are not subject to remanufacturing standards, and to clarify that the label is required for engines that are subject to remanufacturing standards.

- § 1042.901: Update the contact information for the Designated Compliance Officer.

- § 1042.901: Revise the definition of “model year” to correct cites and clarify that the calendar year relates to the time that engines are produced under a certificate of conformity.

- §§ 1042.901 and 1042.910: Update the reference documents for Annex VI and NO<sub>x</sub> Technical Code to include recent changes from the International Maritime Organization.

- § 1042.915: Migrate provisions related to confidential information to 40 CFR part 1068.

#### *I. Amendments Related to Locomotives in 40 CFR Part 1033*

EPA’s emission standards and certification requirements for locomotives and locomotive engines under the Clean Air Act are identified in 40 CFR part 1033.

EPA is proposing to revise the engine mapping provisions in 40 CFR part 1033 for locomotive testing to denote that manufacturers do not have to meet the cycle limit values in 40 CFR 1065.514

when testing complete locomotives. Also, for engine testing with a dynamometer, while the validation criteria of CFR 1065.514 apply, EPA proposes to allow manufacturers the option to check validation using manufacturer-declared values for maximum torque, power, and speed. This option would allow them to omit engine mapping under 40 CFR 1065.510, which is already not required. These provisions would reduce test burden and cost for the manufacturer, while preserving the integrity of the certification requirements.

EPA is also proposing text that describes the alternate ramped-model cycle provisions in 40 CFR part 1033 as some of the notch setting and durations are inconsistent with the description of the duty cycle in Table 1 of 40 CFR 1033.520. EPA has determined that the table is correct as published and the error lies in the text describing how to carry out the ramped-modal test.

We are also proposing to clarify that locomotives operating on a combination of diesel fuel and gaseous fuel are subject to NMHC standards, which is the same as if the locomotives operated only on gaseous fuel. With respect to in-use fuels, we are proposing a clarification in 40 CFR 1033.815 regarding allowable fuels for certain Tier 4 and later locomotives. Specifically, we would note that locomotives certified on ultra-low sulfur diesel fuel, but that do not include sulfur sensitive emission controls, could use low sulfur diesel fuel instead of ultra-low sulfur diesel fuel, consistent with good engineering judgment. For example, an obvious case where this would be appropriate (but not the only possible case), would be if a railroad had emission data showing the locomotive still met the applicable standards/FELs while operating on the higher sulfur fuel.

EPA is requesting comment on four additional locomotive provisions. The first is the allowance in 40 CFR 1033.101(g)(3) for shorter useful lives for non-locomotive-specific engines—that is, engines not specifically designed for use in locomotives. For normal locomotive engines, the minimum useful life is specified in terms of MW-hrs as the product of the rated horsepower multiplied by 7.50. However, the regulations allow manufacturers/remanufacturers of locomotives with non-locomotive-specific engines to ask for a shorter useful life if the locomotives will rarely operate longer than the shorter useful life. Second, we request comment regarding the need for additional guidance on applying this provision.

For example, would it be helpful if we specified that the default alternative minimum useful life under this provision would be 6.00 (instead of 7.50) times the rated horsepower? Third, we request comment on whether EPA should consider notch-specific engine/alternator efficiencies to be confidential business information, and whether we need to update the URL listed in 40 CFR 1033.150(a)(4). Fourth, we request comment on extending the provisions of 40 CFR 1033.101(i) to Tier 4 locomotives. This generally involves a less stringent CO standard in tandem with over-complying with the PM standard. Specifically, this option, which currently applies for Tier 2 and earlier locomotives, requires PM emissions be at least 50 percent below the normally applicable PM standard. The existing provisions were developed to provide a compliance path for natural gas locomotives that reflected both the technological capabilities of natural gas locomotives and the relative environmental significance of CO and PM emissions. This provision was not applied to Tier 4 locomotives, because the applicable Tier 4 p.m. standard is already very low (0.03 g/hp-hr). If we were to apply a similar provision corresponding to Tier 4 standards, we would need to select PM and CO levels that are properly paired to manage this tradeoff. We request comment on whether it is appropriate to pursue such alternate standards, and on the specific numerical standards for PM and CO that would represent an equivalent level of stringency relative to the published standards.

EPA is proposing to make numerous additional changes across 40 CFR part 1033 to correct errors, to add clarification, and to make adjustments based on lessons learned from implementing these regulatory provisions. This includes the following proposed changes:

- §§ 1033.30, 1033.730, and 1033.925: Consolidate information-collection provisions into a single section.

- § 1033.101: Allow manufacturers to certify Tier 4 and later locomotives using Low Sulfur Diesel fuel instead of Ultra-Low Sulfur Diesel fuel.

Manufacturers may wish to do this to show that their locomotives do not include sulfur sensitive technology. § 1033.120: Reduce extended-warranty requirements to warranties that are actually provided to customers, rather than to any published warranties that are offered. The principle is that the emission-related warranty should not be less effective for emission-related items than for items that are not emission-related.

- § 1033.201: Clarify that manufacturers may amend their application for certification after the end of the model year in certain circumstances, but they may not produce locomotives for a given model year after December 31 of the named year.

- § 1033.201: Establish that manufacturers may deliver to EPA for testing a locomotive/engine that is identical to the test locomotive/engine used for certification. This may be necessary if the test locomotive/engine has accumulated too many hours, or if it is unavailable for any reason.

- § 1033.225: Clarify that manufacturers may amend the application for certification after the end of the model year only in certain circumstances, and not to add a new or modified locomotive configuration.

- § 1033.235: Add an explicit allowance for carryover engine families to include the same kind of within-family running changes that are currently allowed over the course of a model year. The original text may have been understood to require that such running changes be made separate from certifying the engine family for the new model year.

- §§ 1033.235, 1033.245, and 1033.601: Describe how to demonstrate compliance with dual-fuel and flexible-fuel locomotives. This generally involves testing with each separate fuel, or with a worst-case fuel blend.

- § 1033.245: Add instructions for calculating deterioration factors for sawtooth deterioration patterns, such as might be expected for periodic maintenance, such as cleaning or replacing diesel particulate filters.

- § 1033.250: Remove references to routine and standard tests, and remove the shorter recordkeeping requirement for routine data (or data from routine tests). All test records must be kept for eight years. With electronic recording of test data, there should be no advantage to keeping the shorter recordkeeping requirement for a subset of test data. EPA also notes that the eight-year period restarts with certification for a new model year if the manufacturer uses carryover data.

- § 1033.255: Clarify that rendering information false or incomplete after submitting it is the same as submitting false or incomplete information. For example, if there is a change to any corporate information or engine parameters described in the manufacturer's application for certification, the manufacturer must amend the application to include the new information.

- § 1033.255: Clarify that voiding certificates for a recordkeeping or reporting violation would be limited to certificates that relate to the particular recordkeeping or reporting failure.

- § 1033.501: Clarify how testing requirements apply differently for locomotive engines and for complete locomotives.

- § 1033.501: Add paragraph (a)(4) to remove proportionality verification for discrete-mode tests if a single batch fuel measurement is used to determine raw exhaust flow rate. This verification involves statistical assessment that is not valid for the single data point. Requiring manufacturers instead to simply ensure constant sample flow should adequately address the concern.

- §§ 1033.515 and 1033.520: Update terminology by referring to "test intervals" instead of "phases". This allows us to be consistent with terminology used in 40 CFR part 1065.

- § 1033.520: Correct the example given to describe the testing transition after the second test interval.

- §§ 1033.701 and 1033.730: Describe the process for retiring emission credits. This may be referred to as donating credits to the environment.

- § 1033.710: Clarify that it is not permissible to show a proper balance of credits for a given model by using emission credits from a future model year.

- § 1033.730: Clarify terminology for ABT reports.

- § 1033.815: Add consideration of periodic locomotive inspections in 184-day intervals.

- § 1033.901: Update the contact information for the Designated Compliance Officer.

- § 1033.915: Migrate provisions related to confidential information to 40 CFR part 1068.

#### *J. Miscellaneous EPA Amendments*

EPA is proposing to clarify that the cold NMHC standards specified in 40 CFR 86.1811–17 do not apply at high altitude. We intended in recent amendments to state that the cold CO standards apply at both low and high altitude, but inadvertently placed that statement where it also covered cold NMHC standards, which contradicts existing regulatory provisions that clearly describe the cold NMHC standards as applying only for low-altitude testing. The proposed change would simply move the new clarifying language to apply only to cold CO standards. We are also proposing to restore the cold NMHC standards in paragraph (g)(2), which were inadvertently removed as part of the earlier amendments.

EPA is proposing to revise the specifications for Class 2b and Class 3 vehicles certifying early to the Tier 3 exhaust emission standards under 40 CFR 86.1816–18 to clarify that carryover values for PM and formaldehyde apply. The preamble to the earlier final rule described these standards properly, but the regulations inadvertently pointed to the Tier 3 values for PM and formaldehyde for these vehicles.

EPA is proposing to make a minor correction to the In-Use Compliance Program under 40 CFR 86.1846–01. A recent amendment describing how to use SFTP test results in the compliance determination inadvertently removed a reference to low-mileage SFTP testing. We are proposing to restore the removed text.

EPA is proposing to revise the instruction for creating road-load coefficients for cold temperature testing in 40 CFR 1066.710 to simply refer back to 40 CFR 1066.305 where this is described more generally. The text originally adopted in 40 CFR 1066.710 incorrectly describes the calculation for determining those coefficients.

EPA is also proposing two minor amendments related to highway motorcycles. First, we are proposing to correct an error related to the small-volume provisions for highway motorcycles. The regulation includes an inadvertent reference to a small-volume threshold based on an annual volume of 3,000 motorcycles produced in the United States. As written, this would not consider any foreign motorcycle production for importation into the United States. This error is corrected by simply revising the text to refer to an annual production volume of motorcycles produced "for" the United States. This would properly reflect small-volume production as it relates to compliance with EPA standards.

Second, we are proposing to clarify the language describing how to manage the precision of emission results, both for measured values and for calculating values when applying a deterioration factor. This involves a new reference to the rounding procedures in 40 CFR part 1065 to replace the references to outdated ASTM procedures. EPA is proposing in 40 CFR 1037.601(a)(3) to clarify that the Clean Air Act does not allow any person to disable, remove, or render inoperative (*i.e.*, tamper with) emission controls on a certified motor vehicle for purposes of competition. An existing provision in 40 CFR 1068.235 provides an exemption for nonroad engines converted for competition use. This provision reflects the explicit exclusion of engines used solely for competition from the CAA definition of

“nonroad engine”. The proposed amendment clarifies that this part 1068 exemption does not apply for motor vehicles.

*K. Amending 49 CFR Parts 512 and 537 To Allow Electronic Submissions and Defining Data Formats for Light-Duty Vehicle Corporate Average Fuel Economy (CAFE) Reports*

To improve efficiency and reduce the burden to manufacturers and the agencies, NHTSA is proposing to modify 49 CFR part 537 eliminating the option for manufacturers to submit pre-model, mid-model and supplemental reports on CD-ROMS and require only one electronic submission (for each report) electronically via a method proscribed by NHTSA. NHTSA is introducing a new electronic format to standardize the method for collecting manufacturer's information. NHTSA also proposes to modify 49 CFR part 512 to include and protect submitted CAFE data elements that need to be treated as confidential business information.

49 CFR part 537 currently requires manufacturers to provide reports to NHTSA containing projected estimates of how manufacturers plan to comply with NHTSA standards. In the CAFE final rule for vehicles manufactured for model years 2017–2025, NHTSA modified its reporting requirements at 49 CFR 537.5(c)(4) to eliminate the option for manufacturers to mail hardcopy submissions of CAFE reports to NHTSA and required all reports to be submitted electronically by CD-ROM (CBI and non-CBI versions) or by email (non-CBI version).<sup>881</sup> Currently, any data provided in the manufacturer's report is required in MS-Excel spreadsheet format. Supporting documentation such as cover letters or requests for confidentiality is required to be provided in a pdf format.

NHTSA is proposing to change the required format for CAFE data required under 49 CFR 537.7(b) and (c) in order to standardize submissions and better align with data provided to EPA. For model year 2013 through 2015 most manufacturer reports received by NHTSA lacked the required format adopted in the 2017–2025 final rule. NHTSA is therefore adopting a standardized template for manufacturers to report model type level data. The template organizes the required data in a consistent manner, adopts formats for values consistent with those provided to EPA for similar values and calculates manufacturer's target standard. Calculating target standards is preferred because it reduces errors in

manufacturer's determinations. However, NHTSA's long-term goal is to standardize the required data for incorporation into an electronic database system and this first step facilitates a structure for coding the electronic data which will ultimately reduce manufacturer's and the government's burden for reporting.

NHTSA rationalizes that establishing a required format is necessary because manufacturers may not understand how to provide the required CAFE data. In the 2017 to 2025 final rule, NHTSA modified its base tire definition to better align with the approach manufacturers use to determine model type target standards. CAFE standards are attribute based, and thus each manufacturer has its own “standard,” or compliance obligation, defined by the vehicles it produces for sale in each fleet in a given model year. A manufacturer calculates its fleet standard from the attribute based target curve standards derived from the unique footprint values, which are the products of the average front and rear vehicle track width and wheelbase dimensions, of the vehicles in each model type. Vehicle track width dimensions are determined with a vehicle equipped with “base tires,” which NHTSA currently defines in 49 CFR part 523 as (for passenger automobiles, light trucks, and medium duty passenger vehicles) the tire size specified as standard equipment by the manufacturer on each unique combination of a vehicle's footprint and model type. Standard equipment is defined in 40 CFR 86.1803–01. NHTSA made these changes to provide a clear definition for footprint calculations and, thus, fleet compliance projections, calculations, finalizations and enforcement efforts. Beginning in model year 2013, as modified in 49 CFR 537.7(b), manufacturers were to provide attribute characteristics and standards in consideration of the change in the base tire definition for each unique model type and footprint combination of the manufacturer's automobiles. Manufacturers were required to provide the data listed by model types in order of increasing average inertia weight from top to bottom down the left side of the table and list the information categories in the order specified in 49 CFR 537.7(b)(3)(i) and (ii) from left to right across the top of the table. Manufacturers could also provide the data using any format required by EPA, which contains all of the required information in a readily identifiable format.

In the 2017–2025 final rule, additional changes to NHTSA's reporting requirements also included a

modification to 49 CFR 537.7(b) to restructure and clarify how manufacturers report information used to make the determination that an automobile can be classified as a light truck for CAFE purposes. The agency felt that this proposed change was necessary because the previous requirements in 49 CFR part 537 specified that manufacturers must provide information on some, but not all, of the functions and features used to classify an automobile as a light truck, and it is important for compliance reasons to understand and be able to readily verify the methods used to ensure manufacturers are classifying vehicles correctly. Furthermore, the previous regulation required that the information be distributed in different locations throughout a manufacturer's report, making it difficult for the agency to clearly determine exactly what functions or features a manufacturer is using to classify a vehicle as a light truck. Therefore, NHTSA streamlined the location of all its provisions for defining vehicle classifications into one consolidate section. With these changes, manufacturers can provide the agency with all the necessary data in a simpler format that allows the agency, and perhaps also the manufacturer, to understand quickly and easily how light truck vehicle classification determination decisions are made.

In reviewing manufacturers current reporting, most manufacturers are still failing to provide the required information for classifying light trucks. For the model year 2015 pre-model year reports, only a few manufacturers provided the required information and many provided the information incorrectly. Therefore, NHTSA is also proposing to incorporate an additional template for collecting vehicle configuration level data which includes vehicle classification information. Similarly, the template will standardize the format of the data with values required by EPA and structures the data for future incorporation into a database system. Finally, the template also simplifies reporting by not having manufacturers report all vehicle classification characteristics but only those used by the manufacturer in qualifying a vehicle as a light truck. NHTSA is adopting this provision to better align with EPA current database structure which uses a similar approach in accepting light truck level data.

<sup>881</sup> 77 FR 62624, October 15, 2012.

## XV. Statutory and Executive Order Reviews

### A. Executive Order 12866: Regulatory Planning and Review and Executive Order 13563: Improving Regulation and Regulatory Review

This action is an economically significant regulatory action that was submitted to the Office of Management and Budget (OMB) for review. Any changes made in response to OMB recommendations have been documented in the docket. The agencies prepared an analysis of the potential costs and benefits associated with this action. This analysis, the draft “Regulatory Impact Analysis—Heavy-Duty GHG and Fuel Efficiency Standards NPRM,” is available in the docket. The analyses contained in this document are also summarized in Sections VII, VIII, and IX of this preamble.

### B. National Environmental Policy Act

NHTSA has initiated the Environmental Impact Statement (EIS) process under the National Environmental Policy Act (NEPA), 42 U.S.C. 4321–4347, and implementing regulations issued by the Council on Environmental Quality (CEQ), 40 CFR part 1500, and NHTSA, 49 CFR part 520. On July 9, 2014, NHTSA published a notice of intent to prepare an EIS for this rulemaking and requested scoping comments (79 FR 38842). The notice invited Federal, State, and local agencies, Indian tribes, stakeholders, and the public to participate in the scoping process and to help identify the environmental issues and reasonable alternatives to be examined in the EIS.

Concurrently with this proposed rule, NHTSA is releasing a Draft Environmental Impact Statement (DEIS). NHTSA prepared the DEIS to analyze and disclose the potential environmental impacts of the proposed HD fuel consumption standards and reasonable alternatives. Environmental impacts analyzed in the DEIS include those related to fuel and energy use, air quality, and climate change. The DEIS also describes potential environmental impacts to a variety of resource areas, including water resources, biological resources, land use and development, safety, hazardous materials and regulated wastes, noise, socioeconomics, and environmental justice. These resource areas are assessed qualitatively in the DEIS.

The DEIS analyzes five alternative approaches to regulating HD vehicle fuel consumption, including a “preferred alternative” and a “no action alternative.” The DEIS evaluates a

reasonable range of alternatives under NEPA, and analyzes the direct, indirect, and cumulative impacts of those alternatives in proportion to their significance.

Because of the link between the transportation sector and GHG emissions, NHTSA recognizes the need to consider the possible impacts on climate and global climate change in the analysis of the effects of these fuel consumption standards. NHTSA also recognizes the difficulties and uncertainties involved in such an impact analysis. Accordingly, consistent with CEQ regulations on addressing incomplete or unavailable information in environmental impact analyses, NHTSA has reviewed existing credible scientific evidence that is relevant to this analysis and summarized it in the DEIS. NHTSA has also employed and summarized the results of research models generally accepted in the scientific community.

Although the alternatives have the potential to decrease GHG emissions substantially, they do not prevent climate change, but only result in reductions in the anticipated increases in CO<sub>2</sub> concentrations, temperature, precipitation, and sea level. They would also, to a small degree, delay the point at which certain temperature increases and other physical effects stemming from increased GHG emissions would occur. As discussed in the EIS, NHTSA presumes that these reductions in climate effects will be reflected in reduced impacts on affected resources.

The DEIS has informed NHTSA decision makers in their preparation of this proposed rule and in the ongoing rulemaking process. NHTSA invites comments on the DEIS from Federal, State, and local agencies, Indian tribes, stakeholders, and the public. Instructions for submission of such comments are included in the DEIS.

For additional information on NHTSA’s NEPA analysis, please see the DEIS. The DEIS is available on NHTSA’s Web site and on <http://www.regulations.gov> in Docket No. NHTSA–2014–0074.

### C. Paperwork Reduction Act

The information collection activities in these proposed rules have been submitted for approval to the Office of Management and Budget (OMB) under the PRA. The Information Collection Request (ICR) document that EPA prepared has been assigned EPA ICR number 2394.04. You can find a copy of the ICR in the docket for these proposed rules, and it is briefly summarized here.

The agencies propose to collect information to ensure compliance with

the provisions in this proposal. This includes a variety of testing, reporting and recordkeeping requirements for vehicle and engine manufacturers. Section 208(a) of the CAA requires that manufacturers provide information the Administrator may reasonably require to determine compliance with the regulations; submission of the information is therefore mandatory. We will consider confidential all information meeting the requirements of Section 208(c) of the CAA.

### Respondents/affected entities:

Respondents are manufacturers of engines and vehicles within the North American Industry Classification System (NAICS) and use the coding structure as defined by NAICS. 336111, 336112, 333618, 336120, 541514, 811112, 811198, 336111, 336112, 422720, 454312, 541514, 541690, 811198, 333618, 336510, for Motor Vehicle Manufacturers, Engine and Truck Manufacturers, Truck Trailer Manufacturers, Commercial Importers of Vehicles and Vehicle Components, and Alternative Fuel Vehicle Converters and Manufacturers.

### Respondent’s obligation to respond:

The information that is subject to this collection is collected whenever a manufacturer applies for a certificate of conformity. Under section 206 of the CAA (42 U.S.C. 7521), a manufacturer must have a certificate of conformity before a vehicle or engine can be introduced into commerce.

**Estimated number of respondents:** It is estimated that this collection affects approximately 155 engine and vehicle manufacturers.

### Frequency of response:

**Total estimated burden:** The burden to the manufacturers affected by these rules has a range based on the number of engines and vehicles a manufacturer produces. The estimated average annual respondent burden associated with the first three implementation years of the Phase 2 program is 62,400 hours (see Table XV–1). This estimated burden for engine and vehicle manufacturers is an average estimate for both new and existing reporting requirements for calendar years 2017, 2018 and 2019, in which trailer manufacturers will prepare for and begin certifying for Phase 2 while Phase 1 will continue for the other affected manufacturers. Burden is defined at 5 CFR 1320.3(b). Burden means the total time, effort, or financial resources expended by persons to generate, maintain, retain, or disclose or provide information to or for a Federal agency. This includes the time needed to review instructions; develop, acquire, install, and utilize technology and systems for the purposes of

collecting, validating, and verifying information, processing and maintaining information, and disclosing and providing information; adjust the existing ways to comply with any previously applicable instructions and requirements; train personnel to be able to respond to a collection of information; search data sources; complete and review the collection of information; and transmit or otherwise disclose the information.

TABLE XV-1—BURDEN FOR REPORTING AND RECORDKEEPING REQUIREMENTS

Number of Affected Vehicle Manufacturers.	155.
Annual Labor Hours for Each Manufacturer to Prepare and Submit Required Information.	Varies.
Total Annual Information Collection Burden.	62,400 Hours.

*Total estimated cost:* The estimated average annual cost associated with the first three implementation years of the Phase 2 program is approximately \$8 million. This includes approximately \$3.3 million in capital and operation & maintenance costs. This estimated cost for engine and vehicle manufacturers is an average estimate for both new and existing testing, recordkeeping, and reporting requirements for calendar years 2017, 2018 and 2019, in which trailer manufacturers will prepare for and begin certifying for Phase 2 while Phase 1 will continue for the other affected manufacturers.

An agency may not conduct or sponsor, and a person is not required to respond to, a collection of information unless it displays a currently valid OMB control number. The OMB control numbers for EPA’s regulations in title 40 are listed in 40 CFR part 9.

Submit your comments on the agencies’ need for this information, the accuracy of the provided burden estimates and any suggested methods for minimizing respondent burden to EPA and NHTSA using the docket identified at the beginning of these proposed rules. You may also send your ICR-related comments to OMB’s Office of Information and Regulatory Affairs via email to [oir\\_a\\_submissions@omb.eop.gov](mailto:oir_a_submissions@omb.eop.gov), Attention: Desk Officer for EPA. Since OMB is required to make a decision concerning the ICR between 30 and 60 days after receipt, OMB must receive comments no later than August 12, 2015. The agencies will respond to any ICR-related comments in the final rules.

NHTSA also separately submitted a request to OMB for approval of a change to an information collection activity that is proposed in this rulemaking. The information collection request was previously assigned ICR No. 2127–0019 for 49 CFR part 537, “Automotive Fuel Economy Reports.”

The existing collection involves vehicle manufacturers submitting reports to the Secretary of Transportation with preliminary estimates demonstrating their ability to comply with corporate average fuel economy standards (CAFE) established by 49 U.S.C. 32902 for each model year. To improve efficiency and reduce manufacturers’ and the government’s burden, NHTSA is proposing to modify 49 CFR part 537 to require CAFE reports to be submitted electronically via an electronic database using a standardized data format. The total estimated amount of paperwork burden resulting from this action that the federal government is imposing on private businesses and citizens is summarized below.

*Respondents:* Automobile manufacturers.

*Estimated Number of Respondents:* 30.

*Estimated Number of Responses:* 54. Some manufacturers have multiple fleets (domestic passenger car, import passenger car, light truck) and 49 CFR part 537 requires a separate report for each fleet.

*Estimated Total Annual Burden:* Thirty automotive manufacturers must comply with 49 CFR 537. For each current model year, each manufacturer is required to submit semi-annual reports: A pre-model year report and a mid-model year report. The pre-model year report must be submitted during the month of December, and the mid-model year report must be submitted during the month of July. The total number of responses submitted by automotive manufacturers is 54. We currently have a clearance based on reports being received from 22 manufacturers with an estimated total annual burden of 2,339 hours. Including 8 additional manufacturers, results in an additional reporting burden of 850 hours. Adding that burden to the existing burden of 2,339 hours, results in a total of 3,189 hours.

*Estimated Frequency:* A pre-model report and a mid-model report are required to be submitted by manufacturers once per model year for each applicable fleet (domestic passenger car, imported passenger car and light trucks).

A copy of the 60 day notice for this ICR containing the proposed changes is included in the docket for this rule.

NHTSA seeks public comments on all aspects of this information collection, including (a) whether the proposed collection of information is necessary for the Department’s performance, (b) the accuracy of the estimated burden, (c) ways for the Department to enhance the quality, utility and clarity of the information collection and (d) ways that the burden could be minimized without reducing the quality of the collected information.

D. Regulatory Flexibility Act

Pursuant to section 603 of the RFA, the agencies prepared an initial regulatory flexibility analysis (IRFA) that examines the impact of the proposed rules on small entities along with regulatory alternatives that could minimize that impact. The complete IRFA is available for review in the docket and is summarized here. As required by section 609(b) of the RFA, EPA convened a Small Business Advocacy Review (SBAR) Panel to obtain advice and recommendations from small entity representatives that potentially would be subject to the rule’s requirements. The SBAR Panel evaluated the assembled materials and small-entity comments on issues related to elements of an IRFA. A copy of the full SBAR Panel Report is available in the rulemaking docket.

(1) Overview

The Regulatory Flexibility Act (RFA) generally requires an agency to prepare a regulatory flexibility analysis of any rule subject to notice and comment rulemaking requirements under the Administrative Procedure Act or any other statute unless the agency certifies that the rule will not have a significant economic impact on a substantial number of small entities. Small entities include small businesses, small organizations, and small governmental jurisdictions.

For purposes of assessing the impacts of today’s rules on small entities, small entity is defined as: (1) A small business as defined by the Small Business Administration’s (SBA) regulations at 13 CFR 121.201 (see table below); (2) a small governmental jurisdiction that is a government of a city, county, town, school district or special district with a population of less than 50,000; and (3) a small organization that is any not-for profit enterprise which is independently owned and operated and is not dominant in its field.

Table XV-2 provides an overview of the primary SBA small business categories potentially affected by this regulation.



TABLE XV-2—PRIMARY SMALL BUSINESS CATEGORIES POTENTIALLY AFFECTED BY THIS REGULATION

Industry expected in rulemaking	Industry NAICS <sup>a</sup> code	NAICS description	Defined as small entity by SBA if less than or equal to:
Alternative Fuel Engine Converters .....	333999	Misc. General Purpose Machinery .....	500 employees.
Voc. Vehicle Chassis Manufacturers .....	811198	All Other Automotive Repair & Maintenance	\$7.0 million (annual receipts).
HD Trailer Manufacturers .....	336120	Heavy-Duty Truck Manufacturing .....	1,000 employees.
	336212	Truck Trailer Manufacturing .....	500 employees.
	333924	Industrial Truck, Trailer & Stacker Machinery	750 employees.

**Note:**<sup>a</sup> North American Industrial Classification System.

## (2) Legal Basis for Agency Action

Heavy-duty vehicles are classified as those with gross vehicle weight ratings (GVWR) of greater than 8,500 lb. Section 202(a) of the Clean Air Act (CAA) allows EPA to regulate new vehicles and new engines by prescribing emission standards for pollutants which the Administrator finds “may reasonably be anticipated to endanger public health or welfare.” In 2009, EPA found that six greenhouse gases (GHGs) were anticipated to endanger public health or welfare, and new motor vehicles and new motor vehicle engines contribute to that pollution. This finding was upheld by the unanimous court in *Coalition for Responsible Regulation v. EPA*, 684 F. 3d 102 (D.C. Cir. 2012). Acting under the authority of the CAA, EPA set the first phase of heavy-duty vehicle GHG standards (Phase 1) and specified certification requirements for emissions of four GHGs emitted by mobile sources: Carbon dioxide (CO<sub>2</sub>), nitrous oxide (N<sub>2</sub>O), methane (CH<sub>4</sub>), and hydrofluorocarbons (HFC).

## (3) Summary of Potentially Affected Small Entities

Table XV-2 above lists industries/sectors potentially affected by the proposed rules. EPA is not aware of any small businesses who manufacture complete heavy-duty pickup trucks and vans, heavy-duty engines, or Class 7 and 8 tractors.

EPA used the criteria for small entities developed by the Small Business Administration under the North American Industry Classification System (NAICS) as a guide. Information about these entities comes from sources including EPA’s certification data, trade association databases, and previous rulemakings that have affected these industries. EPA then found employment information for these companies using the business information database Hoover’s Online (a subsidiary of Dan and Bradstreet). These entities fall under the categories listed in the table.

## (4) Potential Reporting, Recordkeeping and Compliance Burdens

For any emission control program, EPA must have assurances that the regulated products will meet the standards. The program that EPA is considering for manufacturers subject to this proposal will include testing, reporting, and recordkeeping requirements. Testing requirements for these manufacturers could include use of EPA’s Greenhouse gas Emissions Model (GEM) vehicle simulation tool to obtain the overall CO<sub>2</sub> emissions rate for certification of vocational chassis and trailers, aerodynamic testing to obtain aerodynamic inputs to GEM for some trailer manufacturers and engine dynamometer testing for alternative fuel engine converters to ensure their conversions meet the proposed CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub>O engine standards. Reporting requirements would likely include emissions test data or model inputs and results, technical data related to the vehicles, and end-of-year sales information. Manufacturers would have to keep records of this information.

## (5) Related Federal Rules

The primary federal rule that is related to the proposed Phase 2 rules under consideration is the 2011 Greenhouse Gas Emissions and Fuel Efficiency Standards for Medium- and Heavy-Duty Engines and Vehicles (76 FR 57106). This Phase 1 rulemaking would continue to be in effect in the absence of these proposed rules. Several Federal rules relate to heavy-duty vehicles and to the proposed Phase 2 rules under consideration. The Department of Transportation, through NHTSA, has several safety requirements for these vehicles. California adopted its own greenhouse gas initiative, which places aerodynamic requirements on trailers used in long-haul applications. None of these existing regulations were found to conflict with the proposed rulemaking.

## (6) Summary of SBREFA Panel Process and Panel Outreach

## (a) Significant Panel Findings

The Small Business Advocacy Review Panel (SBAR Panel, or the Panel) considered regulatory options and flexibilities to help mitigate potential adverse effects on small businesses as a result of these rules. During the SBREFA Panel process, the Panel sought out and received comments on the regulatory options and flexibilities that were presented to SERs and Panel members. The recommendations of the Panel are described below and are also located in Section XX of the SBREFA Final Panel Report, which is available in the public docket.

## (b) Panel Process

As required by Section 609(b) of the RFA, as amended by SBREFA, we also conducted outreach to small entities and convened an SBAR Panel to obtain advice and recommendations of representatives of the small entities that potentially would be subject to the rule’s requirements. On October 22, 2014, EPA’s Small Business Advocacy Chairperson convened a Panel under Section 609(b) of the RFA. In addition to the Chair, the Panel consisted of the Division Director of the Assessment and Standards Division of EPA’s Office of Transportation and Air Quality, the Chief Counsel for Advocacy of the Small Business Administration, and the Administrator of the Office of Information and Regulatory Affairs within the Office of Management and Budget.

As part of the SBAR Panel process, we conducted outreach with representatives of small businesses that would potentially be affected by the proposed rulemaking. We met with these Small Entity Representatives (SERs) to discuss the potential rulemaking approaches and potential options to decrease the impact of the rulemaking on their industries. We distributed outreach materials to the SERs; these materials included background on the rulemaking, possible



regulatory approaches, and possible rulemaking alternatives. The Panel met with SERs from the industries that would be directly affected by the Phase 2 rules on November 5, 2014 (trailer manufacturers) and November 6, 2014 (engine converters and vocational vehicle chassis manufacturers) to discuss the outreach materials and receive feedback on the approaches and alternatives detailed in the outreach packet. The Panel also met with SERs on July 19, 2014 for an initial, introductory outreach meeting, and held a supplementary outreach meeting with the trailer manufacturer SERs on October 28, 2014. The Panel received written comments from the SERs following each meeting in response to discussions had at the meeting and the questions posed to the SERs by the agency. The SERs were specifically asked to provide comment on regulatory alternatives that could help to minimize the rule's impact on small businesses.

The Panel's findings and discussions were based on the information that was available during the term of the Panel and issues that were raised by the SERs during the outreach meetings and in their comments. It was agreed that EPA should consider the issues raised by the SERs and discussions had by the Panel itself, and that EPA should consider comments on flexibility alternatives that would help to mitigate negative impacts on small businesses to the extent legally allowable by the Clean Air Act.

Alternatives discussed throughout the Panel process included those offered in previous or current EPA rulemakings, as well as alternatives suggested by SERs and Panel members. A summary of these recommendations is detailed below, and a full discussion of the regulatory alternatives and hardship provisions discussed and recommended by the Panel can be found in the SBREFA Final Panel Report. A complete discussion of the provisions for which we are requesting comment and/or proposing in this action can be found in Sections IV.E and V.D of this preamble. Also, the Panel Report includes all comments received from SERs (Appendix B of the Report) and summaries of the two outreach meetings that were held with the SERs. In accordance with the RFA/SBREFA requirements, the Panel evaluated the aforementioned materials and SER comments on issues related to the IRFA. The Panel's recommendations from the Final Panel Report are discussed below.

#### (c) Panel Recommendations

##### (i) Small Business Trailer Manufacturers

Comments from trailer manufacturer SERs indicated that these companies are familiar with most of the technologies described in the materials, but have no experience with EPA certification and do not anticipate they could manage the accounting and reporting requirements without additional staff and extensive training. Performance testing, which is a common requirement for many of EPA's regulatory programs, is largely unfamiliar to these small business manufacturers and the SERs believed the cost of testing would be a significant burden on their companies. In light of this feedback, the Panel recommended a combination of streamlined compliance and targeted exemptions for these small businesses based on the specific trailer types that they manufacture. The Panel believed these strategies would achieve many of the benefits for the environment by driving adoption of CO<sub>2</sub>-reducing technologies, while significantly reducing the burden that these new regulations would introduce on small businesses.

##### (ii) Box Trailer Manufacturers

Box trailer manufacturers have the benefit of relying on the aerodynamic technology development initiated through EPA's voluntary SmartWay program. The Panel was aware that EPA was planning to propose a simplified compliance program for all manufacturers, in which aerodynamic device manufacturers have the opportunity to test and certify their devices with EPA as technologies that can be used by trailer manufacturers in their trailer certification. This pre-approved technology strategy was intended to provide all trailer manufacturers a means of complying with the standards without the burden of testing. In the event that this strategy is limited to the early years of the trailer program for all manufactures, the Panel recommended that small manufacturers continue to be given the option to use pre-approved devices in lieu of testing.

In the event that small trailer manufacturers adopt pre-approved aerodynamic technologies and the appropriate tire technologies for compliance, the Panel recommended an alternative compliance pathway in which small business trailer manufacturers could simply report to EPA that all of their trailers include approved technologies in lieu of collecting all of the required inputs for the GEM vehicle simulation.

##### (iii) Non-Box Trailer Manufacturers

The Panel recommended no aerodynamic requirements for non-box trailers. The non-box trailer SERs indicated that they had no experience installing aerodynamic devices and had only seen them in prototype-level demonstrations. In terms of the aerodynamic devices in use today, most non-box trailer SERs identified unique operations in which their trailers are used that preclude the use of those technologies.

Some non-box trailer manufacturers had experience with LRR tires and ATI systems. However, the non-box trailer manufacturer SERs indicated that LRR tires are not currently available for some of their trailer types. The SERs noted that tire manufacturers are currently focused on box trailer applications and there are only a few LRR tire models that meet the needs of their customers. The Panel recommended EPA ensure appropriate availability of these tires in order for it to be deemed a feasible means of achieving these standards and recommended a streamlined compliance process based on the availability of technologies. The Panel suggested the best compliance option from a small business perspective would be for EPA to pre-approve tires, similar to the approach being proposed for aerodynamic technologies, and to maintain a list that could be used to exempt small businesses when no suitable tires are available. However, the Panel recognized the difficulties of maintaining an up-to-date list of certified technologies. The Panel recommended that, if EPA did not adopt the list-based approach, the agency consider a simplified letter-based compliance option that allows manufacturers to petition EPA for an exemption if they are unable to identify tires that meet the LRR performance requirements on a trailer family basis.

##### (iv) Non-Highway Trailer Manufacturers

The Panel recommended excluding all trailers that spend a significant amount of time in off-road applications. These trailers may not spend much time at highway speeds and aerodynamic devices may interfere with the vehicle's intended purpose. Additionally, tires with lower rolling resistance may not provide the type of traction needed in off-road applications.

##### (v) Compliance Provisions for All Small Trailer Manufacturers

Due to the potential for reducing a small business's competitiveness compared to the larger manufacturers, as well as the ABT record-keeping

burden, the Panel recommended that EPA consider small business flexibilities to allow small entities to opt out of ABT without placing themselves at a competitive disadvantage to larger firms that adopt ABT, such as a low volume exemption or requiring only LRR where appropriate. EPA was asked to consider flexibilities for small businesses that would ease and incentivize their participation in ABT, such as streamlined the tracking requirements for small businesses. In addition, the Panel recommended that EPA request comment on the feasibility and consequences of ABT for the trailer program and additional flexibilities that will promote small business participation.

(vi) Lead Time Provisions for All Small Trailer Manufacturers

For all trailer types that will be included in the proposal, the Panel recommended a 1-year delay in implementation for small trailer manufacturers at the start of the proposed rulemaking to allow them additional lead time to make the proper staffing adjustments and process changes and possibly add new infrastructure to meet these requirements. In the event that EPA is unable to provide pre-approved technologies for manufacturers to choose for compliance, the Panel recommended that EPA provide small business trailer manufacturers an additional 1-year delay for each subsequent increase in stringency. This additional lead time will allow these small businesses to research and market the technologies required by the new standards.

(vii) Small Business Alternative Fuel Engine Converters

To reduce the compliance burden of small business engine converters who convert engines in previously-certified complete vehicles, the Panel recommended allowing engine compliance to be sufficient for certification. This would mean the converted vehicle would not need to be recertified as a vehicle. This flexibility would eliminate the need for these small manufacturers to gather all of the additional component-level information in addition to the engine CO<sub>2</sub> performance necessary to properly certify a vehicle with GEM (e.g., transmission data, aerodynamic performance, tire rolling resistance, etc.). In addition, the Panel recommended that small engine converters be able to submit an engineering analysis, in lieu of measurement, to show that their

converted engines do not increase N<sub>2</sub>O emissions. Many of the small engine converters are converting SI-engines, and the catalysts in these engines are not expected to substantially impact N<sub>2</sub>O production. Small engine converters that convert CI-engines could likely certify by ensuring that their controls require changes to the SCR dosing strategies.

The Panel did not recommend separate standards for small business natural gas engine manufacturers. The Panel believes this would discourage entrance for small manufacturers into this emerging market by adding unnecessary costs to a technology that has the potential to reduce CO<sub>2</sub> tailpipe emissions. In addition, the Panel noted that additional leakage requirements beyond a sealed crankcase for small business natural gas-fueled CI engines and requirements to follow industry standards for leakage could be waived for small businesses with minimal impact on overall GHG emissions.

Finally, the Panel recommended that small engine converters receive a one-year delay in implementation for each increase in stringency throughout the proposed rules. This flexibility will provide small converters additional lead time to obtain the necessary equipment and perform calibration testing if needed.

(viii) Emergency Vehicle Chassis Manufacturers

Fire trucks, and many other emergency vehicles, are built for high level of performance and reliability in severe-duty applications. Some of the CO<sub>2</sub>-reducing technologies listed in the materials could compromise the fire truck's ability to perform its duties and many of the other technologies simply provide no benefit in real-world emergency applications. The Panel recommended proposing less stringent standards for emergency vehicle chassis manufactured by small businesses. The Panel suggested that feasible standards could include adoption of LRR tires at the baseline Phase 2 level and installation of a Phase 2-compliant engine. In addition, the Panel recommended a simplified certification approach for small manufacturers who make chassis for emergency vehicles that reduces the number of inputs these manufacturers must obtain for GEM.

(ix) Off-Road Vocational Vehicle Chassis Manufacturers

EPA is planning to propose to continue the exemptions in Phase 1 for off-road and low-speed vocational vehicles (see generally 76 FR 57175). These provisions currently apply for

vehicles that are defined as "motor vehicles" per 40 CFR 85.1703, but may conduct most of their operations off-road. Vehicles qualifying under these provisions must comply with the applicable engine standard, but need not comply with a vehicle-level GHG standard. The Panel concluded this exemption is sufficient to cover the small business chassis manufacturers who design chassis for off-road vocational vehicles.

(x) Custom Chassis Manufacturers

The Panel concluded that chassis designed for specialty operations often have limited ability to adopt CO<sub>2</sub>- and fuel consumption-reducing technologies due to their unique use patterns. In addition, the manufacturers of these chassis have very small annual sales volumes. The Panel recommended that EPA propose a low volume exemption for these custom chassis manufacturers. The Panel did not receive sufficient information to recommend a specific sales volume, but recommended that EPA request comment on how to design a small business exemption by means of a volume exemption, and an appropriate annual sales volume threshold.

(xi) Glider Manufacturers

The Panel was aware that EPA would like to reduce the use of glider kits, which have higher emissions of criteria pollutants like NO<sub>x</sub> than current engines, and which could have higher GHG emissions than Phase 2 engines. However, the Panel estimates that the number of vehicles produced by the small businesses who manufacture glider kits is too small to have a substantial impact on the total heavy-duty inventory and recommended that existing small businesses be allowed to continue assembling glider vehicles without having to comply with the GHG requirements. The Panel recommended that EPA establish an allowance for existing small business glider manufacturers to produce some number of glider kits for legitimate purposes, such as for newer vehicles badly damaged in crashes. The Panel recommended that any other limitations on small business glider production be flexible enough to allow sales levels as high as the peak levels in the 2010–2012 timeframe.

(7) Summary of Projected Impact on Small Businesses

EPA has chosen to propose the Panel's recommended regulatory flexibility provisions for small business alternative fuel converters and vocational vehicle chassis manufacturers and we believe that all of

the small businesses in these industries will be impacted by less than one percent of their annual sales. EPA is also proposing many of the Panel's recommendations for small business trailer manufacturers, including seeking comment on the possibility of a small volume exemption. A majority of the small trailer manufacturers produce non-box trailers, and are not required to adopt aerodynamic devices in this proposal. Additionally, many of the smallest trailer manufacturers produce specialty trailers that are candidates for exemption under the proposed off-highway or heavy-haul provisions described in Section IVC.(5). At this time, EPA believes the additional flexibilities offered for small business trailer manufacturers will reduce their burden below three percent of their annual sales. A more detailed description of the analysis to quantify the impact on small businesses in each affected industry sector is included in the IRFA as presented in Chapter 12 of the draft RIA for this rulemaking. EPA invites comment on all aspects of the proposal and its impacts on small entities.

#### *E. Unfunded Mandates Reform Act*

This action contains a federal mandate under UMRA, 2 U.S.C. 1531–1538, that may result in expenditures of \$100 million or more for state, local and tribal governments, in the aggregate, or the private sector in any one year. Accordingly, the agencies have prepared a statement required under section 202 of UMRA. The statement is included in the docket for this action and briefly summarized here.

The agencies have prepared a statement of the cost-benefit analysis as required by Section 202 of the UMRA; this discussion can be found in this preamble, and in the draft RIA. The agencies believe that the proposal represents the least costly, most cost-effective approach to achieve the statutory requirements of the rules. Section IX explains why the agencies believe that the fuel savings that would result from this proposal would lead to lower prices economy wide, improving U.S. international competitiveness. The costs and benefits associated with the proposal are discussed in more detail above in Section IX and in the Draft Regulatory Impact Analysis, as required by the UMRA.

This action is not subject to the requirements of Section 203 of UMRA because it contains no regulatory requirements that might significantly or uniquely affect small governments.

#### *F. Executive Order 13132: Federalism*

This action does not have federalism implications. It will not have substantial direct effects on the states, on the relationship between the national government and the states, or on the distribution of power and responsibilities among the various levels of government.

In the spirit of Executive Order 13132, and consistent with EPA policy to promote communications between EPA and State and local governments, EPA specifically solicits comment on this proposed rules from State and local officials.

NHTSA notes that EPCA contains a provision (49 U.S.C. 32919(a)) that expressly preempts any State or local government from adopting or enforcing a law or regulation related to fuel economy standards or average fuel economy standards for automobiles covered by an average fuel economy standard under 49 U.S.C. Chapter 329. However, commercial medium- and heavy-duty on-highway vehicles and work trucks are not “automobiles,” as defined in 49 U.S.C. 32901(a)(3). In Phase 1 NHTSA concluded that EPCA's express preemption provision would not reach the fuel efficiency standards to be established in this rulemaking. NHTSA is reiterating that conclusion here for the proposed Phase 2 standards.

NHTSA also considered the issue of implied or conflict preemption. The possibility of such preemption is dependent upon there being an actual conflict between a standard established by NHTSA in this rulemaking and a State or local law or regulation. See *Spiestma v. Mercury Marine*, 537 U.S. 51, 64–65 (2002). At present, NHTSA has no knowledge of any State or local law or regulation that would actually conflict with one of the fuel efficiency standards to be established in this rulemaking.

NHTSA seeks public comment on this issue.

#### *G. Executive Order 13175: Consultation and Coordination With Indian Tribal Governments*

This action does not have tribal implications as specified in Executive Order 13175. This proposal will be implemented at the Federal level and impose compliance costs only on vehicle and engine manufacturers. Tribal governments would be affected only to the extent they purchase and use regulated vehicles. Thus, Executive Order 13175 does not apply to this action.

The agencies specifically solicit comment on this proposal from Tribal officials.

#### *H. Executive Order 13045: Protection of Children From Environmental Health Risks and Safety Risks*

This action is subject to Executive Order 13045 because it is an economically significant regulatory action as defined by Executive Order 12866, and the agencies believe that the environmental health or safety risk addressed by this action may have a disproportionate effect on children. Accordingly, we have evaluated the environmental health or safety effects of these risks on children. The results of this evaluation are discussed below.

A synthesis of the science and research regarding how climate change may affect children and other vulnerable subpopulations is contained in the Technical Support Document for Endangerment or Cause or Contribute Findings for Greenhouse Gases under Section 202(a) of the Clean Air Act, which can be found in the public docket for this proposal. In making those findings, EPA Administrator placed weight on the fact that certain groups, including children, are particularly vulnerable to climate-related health effects. In those findings, EPA Administrator also determined that the health effects of climate change linked to observed and projected elevated concentrations of GHGs include the increased likelihood of more frequent and intense heat waves, increases in ozone concentrations over broad areas of the country, an increase of the severity of extreme weather events such as hurricanes and floods, and increasing severity of coastal storms due to rising sea levels. These effects can all increase mortality and morbidity, especially in vulnerable populations such as children, the elderly, and the poor. In addition, the occurrence of wildfires in North America have increased and are likely to intensify in a warmer future. PM emissions from these wildfires can contribute to acute and chronic illnesses of the respiratory system, including pneumonia, upper respiratory diseases, asthma, and chronic obstructive pulmonary disease, especially in children.

The agencies have estimated reductions in projected global mean surface temperature and sea level rise as a result of reductions in GHG emissions associated with the standards finalized in this action (Section VII and NHTSA's DEIS). Due to their vulnerability, children may receive disproportionate benefits from these reductions in temperature and the subsequent reduction of increased ozone and severity of weather events.

As discussed in Section VIII.D.2, based on the magnitude of the non-GHG co-pollutant emissions changes predicted to result from the proposed standards, the agencies expect that there will be improvements in ambient air quality, pending a more comprehensive analysis for the final rulemaking. Due to their vulnerability, children may receive disproportionate benefits from these reductions, as well.

Children are also more susceptible than adults to many air pollutants because of differences in physiology, higher per body weight breathing rates and consumption, rapid development of the brain and bodily systems, and behaviors that increase chances for exposure. Even before birth, the developing fetus may be exposed to air pollutants through the mother that affect development and permanently harm the individual.

Infants and children breathe at much higher rates per body weight than adults, with infants under one year of age having a breathing rate up to five times that of adults.<sup>882</sup> In addition, children breathe through their mouths more than adults and their nasal passages are less effective at removing pollutants, which leads to a higher deposition fraction in their lungs.<sup>883</sup>

Certain motor vehicle emissions present greater risks to children as well. Early lifestages (e.g., children) are thought to be more susceptible to tumor development than adults when exposed to carcinogenic chemicals that act through a mutagenic mode of action.<sup>884</sup> Exposure at a young age to these carcinogens could lead to a higher risk of developing cancer later in life.

The adverse effects of individual air pollutants may be more severe for children, particularly the youngest age groups, than adults. The Integrated Science Assessments and Criteria Documents for a number of pollutants affected by these rules, including those for NO<sub>2</sub>, SO<sub>2</sub>, PM, ozone and CO, describe children as a group with greater susceptibility. Section VIII.B.7

discusses a number of childhood health outcomes associated with proximity to roadways, including evidence for exacerbation of asthma symptoms and suggestive evidence for new onset asthma. In general, these studies do not identify the specific contaminants associated with adverse effects, instead addressing the near-roadway environment as one containing numerous exposures potentially associated with adverse health effects.

There is substantial evidence that people who live or attend school near major roadways are more likely to be of a minority race, Hispanic ethnicity, and/or low SES. Within these highly exposed groups, children's exposure and susceptibility to health effects is greater than adults due to school-related and seasonal activities, behavior, and physiological factors.

Section VIII.D.2 describes the expected ambient air quality changes for non-GHG co-pollutants resulting from the proposed standards, which represent levels to which the general population is exposed. Children are not expected to experience greater ambient concentrations of air pollutants than the general population. However, because of their greater susceptibility to air pollution and their increased time spent outdoors, it is likely that the proposed standards would have particular benefits for children's health.

#### *I. Executive Order 13211: Actions Concerning Regulations That Significantly Affect Energy Supply, Distribution, or Use*

This action is not a "significant energy action" because it is not likely to have a significant adverse effect on the supply, distribution or use of energy. In fact, this proposal has a positive effect on energy supply and use. Because the combination of the proposed fuel economy standards and the proposed GHG emission standards would result in significant fuel savings, this proposal encourages more efficient use of fuels. Therefore, we have concluded that this proposal is not likely to have any adverse energy effects. Our energy effects analysis is described above in Section IX.

#### *J. National Technology Transfer and Advancement Act and 1 CFR Part 51*

This action involves technical standards.

The agencies propose to use the following voluntary consensus standards from SAE International:

- SAE J1263 (March 2010) and SAE J2263 (December 2008) are voluntary consensus standards that together establish a test protocol to determine

road-load coefficients for properly testing vehicles on a chassis dynamometer to simulate in-use operating conditions. Heavy-duty vehicle testing already relies on these reference standards under 40 CFR part 1066.

- SAE J2343 (July 2008). This voluntary consensus standard establishes a minimum hold time for LNG-fueled vehicles following a refueling event before the tank vents to relieve pressure. This is described further in Section XIII.A.3.

We are also aware that updated standards are pending for three SAE standards that are already incorporated by reference in the regulations—SAE J2263, SAE J1526, and SAE J2071. We will consider referencing these updated standards if they are adopted before completion of the final rule. All SAE documents are available from the publisher's Web site at [www.sae.org](http://www.sae.org).

We are proposing to adopt updated versions of two ASTM standards that already apply under 40 CFR part 1036. This applies for ASTM D240–14 and ASTM D4809–13, both of which specify test methods for determining the heat of combustion of liquid hydrocarbon fuels.

This action also involves technical standards for which there is no available voluntary consensus standard. First, the agencies are proposing greenhouse gas emission standards for heavy-duty vehicles that depend on computer modeling to predict and emission rate based on various engine and vehicle characteristics. Such a model is not available from other sources, so EPA has developed the Greenhouse Gas Emission Model as a simulation tool for demonstrating compliance with emission standards. See Section II for a detailed description of the model. A working version of this software is available for download at <http://www.epa.gov/otaq/climate/gem.htm>.

Second, we need to define a benchmark gear oil for establishing a reference point for establishing improvements in axle efficiency. There is no voluntary consensus standard for this purpose. As described in Section II.C.1.c, we are instead proposing to identify the technical specifications for a commonly used commercial product from BASF Corporation. These technical specifications have been placed in the docket for this rulemaking.

Third, 40 CFR part 1037 includes several test procedures involving calculation with numerous physical quantities. We are incorporating by reference NIST Special Publication 811 to allow for standardization and consistency of units and nomenclature. This standard, which already applies for

<sup>882</sup> U.S. Environmental Protection Agency. (2009). Metabolically-derived ventilation rates: a revised approach based upon oxygen consumption rates. Washington, DC: Office of Research and Development. EPA/600/R-06/129F. <http://cfpub.epa.gov/ncea/cfm/recordisplay.cfm?deid=202543>.

<sup>883</sup> Foos, B.; Marty, M.; Schwartz, J.; Bennet, W.; Moya, J.; Jarabek, A.M.; Salmon, A.G. (2008) Focusing on children's inhalation dosimetry and health effects for risk assessment: An introduction. *J Toxicol Environ Health* 71A: 149–165.

<sup>884</sup> U.S. Environmental Protection Agency. (2005). Supplemental guidance for assessing susceptibility from early-life exposure to carcinogens. Washington, DC: Risk Assessment Forum. EPA/630/R-03/003F. [http://www.epa.gov/raf/publications/pdfs/childrens\\_supplement\\_final.pdf](http://www.epa.gov/raf/publications/pdfs/childrens_supplement_final.pdf).

40 CFR parts 1065 and 1066, is published by the National Institute of Standards and Technology (Department of Commerce) and is available at no charge at [www.nist.gov](http://www.nist.gov).

Fourth, the amendments for marine diesel engines involve technical standards related to the requirements that apply internationally. There are no voluntary consensus documents that address these technical standards. In earlier rulemakings, EPA has adopted an incorporation by reference for MARPOL Annex VI and the NO<sub>x</sub> Technical code in 40 CFR parts 1042 and 1043. The International Maritime Organization adopted changes to these documents in 2013 and 2014, which need to be reflected in 40 CFR parts 1042 and 1043. EPA recently adopted the updated reference documents in 40 CFR part 1043. As noted in Section XIV.H.4, this proposal includes the remaining step of incorporating the updated IMO documents by reference in 40 CFR part 1042. All these documents are available at [www.imo.org](http://www.imo.org).

*K. Executive Order 12898: Federal Actions To Address Environmental Justice in Minority Populations and Low-Income Populations*

The agencies believe the human health or environmental risk addressed by this action will not have potential disproportionately high and adverse human health or environmental effects on minority, low-income or indigenous populations. The results of this evaluation are discussed below.

With respect to GHG emissions, the agencies have determined that these proposed rules would not have disproportionately high and adverse human health or environmental effects on minority, low-income or indigenous populations because they increase the level of environmental protection for all affected populations without having any disproportionately high and adverse human health or environmental effects on any population, including any minority, low-income or indigenous population. The reductions in CO<sub>2</sub> and other GHGs associated with the standards would affect climate change projections, and the agencies have estimated reductions in projected global mean surface temperatures (Section VII). Within communities experiencing adverse impacts related to climate change, certain parts of the population may be especially vulnerable; these include the poor, the elderly, those already in poor health, the disabled, those living alone, and/or indigenous

populations dependent on one or a few resources.<sup>885</sup>

For non-GHG co-pollutants such as ozone, PM<sub>2.5</sub>, and toxics, the agencies have concluded that it is not practicable to determine whether there would be disproportionately high and adverse human health or environmental effects on minority, low income and/or indigenous populations from these rules. As discussed in Section VIII.D.2, however, based on the magnitude of the non-GHG co-pollutant emissions changes predicted to result from the proposed standards, EPA and NHTSA expect that there will be improvements in ambient air quality that would likely help in mitigating the disparity in racial, ethnic, and economically-based exposures, pending a more comprehensive analysis for the final rulemaking.

*L. Endangered Species Act*

Section 7(a)(2) of the ESA requires federal agencies, in consultation with one or both of the Services (depending on the species at issue), to ensure that actions they authorize, fund, or carry out are not likely to jeopardize the continued existence of federally listed endangered or threatened species or result in the destruction or adverse modification of designated critical habitat of such species. 16 U.S.C. 1536(a)(2). Under relevant implementing regulations, section 7(a)(2) applies only to actions where there is discretionary federal involvement or control. 50 CFR 402.03. Further, under the regulations consultation is required only for actions that “may affect” listed species or designated critical habitat. 50 CFR 402.14. Consultation is not required where the action has no effect on such species or habitat. Under this standard, it is the federal agency taking the action that evaluates the action and determines whether consultation is required. *See* 51 FR 19926, 19949 (June 3, 1986). Effects of an action include both the direct and indirect effects that will be added to the environmental baseline. 50 CFR 402.02. Indirect effects are those that are caused by the action, later in time, and that are reasonably certain to occur. *Id.* To trigger a consultation requirement, there must thus be a causal connection between the federal action, the effect in question, and the listed species, and the effect must be reasonably certain to occur.

<sup>885</sup> EPA 2009. Technical Support Document for Endangerment and Cause of Contribute Findings for Greenhouse Gases under Section 202(a) of the Clean Air Act. Available at: [http://www.epa.gov/climatechange/Downloads/endangerment/Endangerment\\_TSD.pdf](http://www.epa.gov/climatechange/Downloads/endangerment/Endangerment_TSD.pdf).

The agencies note that the projected environmental effects of this rule are positive. See proposed preamble section VII.C and VIII. However, the fact that the rule will have overall positive effects on the environment does not mean that the rule may affect any listed species or designated critical habitat within the meaning of ESA section 7(a)(2) or the implementing regulations or require ESA consultation. We have carefully considered various types of potential effects in reaching the conclusion that ESA consultation is not required for this rule.

With respect to the projected GHG emission reductions, we are mindful of significant legal and technical analysis undertaken by FWS and the U.S. Department of the Interior in the context of listing the polar bear as a threatened species under the ESA. In that context, in 2008, FWS and DOI expressed the view that the best scientific data available were insufficient to draw a causal connection between GHG emissions and effects on the species in its habitat.<sup>886</sup> The DOI Solicitor concluded that where the effect at issue is climate change, proposed actions involving GHG emissions cannot pass the “may affect” test of the section 7 regulations and thus are not subject to ESA consultation.

The agencies have also previously considered issues relating to GHG emissions in connection with the requirements of ESA section 7(a)(2). Although the GHG emission reductions projected for this proposal are large, EPA evaluated comparable or larger reductions in assessing this same issue in the context of the light duty vehicle GHG emission standards for model years 2012–2016 and 2017–2025. There the agency projected emission reductions comparable to, or greater than those projected here over the lifetimes of the model years in question<sup>887</sup> and, based on air quality modeling of potential environmental effects, concluded that “EPA knows of no modeling tool which can link these small, time-attenuated changes in global metrics to particular effects on listed species in particular areas. Extrapolating from global metric to local effect with

<sup>886</sup> *See, e.g.*, 73 FR 28212, 28300 (May 15, 2008); Memorandum from David Longly Bernhardt, Solicitor, U.S. Department of the Interior re: “Guidance on the Applicability of the Endangered Species Act’s Consultation Requirements to Proposed Actions Involving the Emission of Greenhouse Gases” (Oct. 3, 2008).

<sup>887</sup> *See* 75 FR at 25347 Table I.C 2–4 (May 7, 2010); 77 FR at 62894 Table III–68 (Oct. 15, 2012); compare with Table VII–41 to the preamble to the proposed rule here. Projected emission reductions of criteria pollutants and air toxics are also on the same order as the two light duty vehicle rules.

such small numbers, and accounting for further links in a causative chain, remain beyond current modeling capabilities.” EPA, *Light Duty Vehicle Greenhouse Gas Standards and Corporate Average Fuel Economy Standards*, Response to Comment Document for Joint Rulemaking at 4–102 (Docket EPA–OAR–HQ–2009–4782). EPA reached this conclusion after evaluating issues relating to potential improvements relevant to both temperature and oceanographic pH outputs. EPA’s ultimate finding was that “any potential for a specific impact on listed species in their habitats associated with these very small changes in average global temperature and ocean pH is too remote to trigger the threshold for ESA section 7(a)(2).” *Id.* EPA believes that the same conclusion would apply to the present proposed rule (should it be adopted), given that the projected CO<sub>2</sub> emission reductions are comparable to or less than those projected for either of the light duty vehicle rules. See section VII.D.2 and Table VII–41 to the preamble to the proposed rule; *See also, e.g., Ground Zero Center for Non-Violent Action v. U.S. Dept. of Navy*, 383 F. 3d 1082, 1091–92 (9th Cir. 2004) (where the likelihood of jeopardy to a species from a federal action is extremely remote, ESA does not require consultation).

## **XVI. EPA and NHTSA Statutory Authorities**

As described below, the proposed regulations are authorized separately for EPA and NHTSA under the agencies’ respective statutory authorities. See Section I for a discussion of these authorities.

### **A. EPA**

Statutory authority for the vehicle controls proposed today is found in CAA section 202(a) (which authorizes standards for emissions of pollutants from new motor vehicles that emissions cause or contribute to air pollution which may reasonably be anticipated to endanger public health or welfare), and CAA sections 202(d), 203–209, 216, and 301 (42 U.S.C. 7521(a), 7521(d), 7522–7543, 7550, and 7601).

Pursuant to 42 U.S.C. 4365, EPA must make certain proposed rules available to the Science Advisory Board (SAB) for review. EPA may also voluntarily choose to make other rules available to the SAB. EPA notified the SAB of its plans for this rulemaking and on June 11, 2014, the chartered SAB discussed the recommendations of its work group on the planned action and agreed that no further SAB consideration of the supporting science was merited.

### **B. NHTSA**

Statutory authority for the fuel consumption standards proposed today is found in section 103 of the Energy Independence and Security Act of 2007, 49 U.S.C. 32902(k). EISA authorizes a fuel efficiency improvement program, designed to achieve the maximum feasible improvement to be created for commercial medium- and heavy-duty on-highway vehicles and work trucks, to implement appropriate test methods, measurement metrics, fuel economy standards, and compliance and enforcement protocols that are appropriate, cost-effective and technologically feasible. To the extent motor vehicle safety is implicated, NHTSA’s authority to regulate it is also derived from the National Traffic and Motor Vehicle Safety Act, 49 U.S.C. 30101 *et seq.*

### **List of Subjects**

#### **40 CFR Part 9**

Reporting and recordkeeping requirements.

#### **40 CFR Part 22**

Administrative practice and procedure, Air pollution control, Hazardous substances, Hazardous waste, Penalties, Pesticides and pests, Poison prevention, Water pollution control.

#### **40 CFR Part 85**

Confidential business information, Imports, Labeling, Motor vehicle pollution, Reporting and recordkeeping requirements, Research, Warranties.

#### **40 CFR Part 86**

Administrative practice and procedure, Confidential business information, Incorporation by reference, Labeling, Motor vehicle pollution, Reporting and recordkeeping requirements.

#### **40 CFR Part 600**

Administrative practice and procedure, Electric power, Fuel economy, Incorporation by reference, Labeling, Reporting and recordkeeping requirements.

#### **40 CFR Part 1033**

Administrative practice and procedure, Air pollution control.

#### **40 CFR Parts 1036 and 1037**

Environmental protection, Administrative practice and procedure, Air pollution control, Confidential business information, Incorporation by reference, Labeling, Motor vehicle pollution, Reporting and recordkeeping requirements, Warranties.

#### **40 CFR Part 1039**

Environmental protection, Administrative practice and procedure, Air pollution control, Confidential business information, Imports, Labeling, Penalties, Reporting and recordkeeping requirements, Warranties.

#### **40 CFR Part 1042**

Environmental protection, Administrative practice and procedure, Air pollution control, Confidential business information, Imports, Labeling, Penalties, Reporting and recordkeeping requirements, Vessels, Warranties.

#### **40 CFR Part 1043**

Environmental protection, Administrative practice and procedure, Air pollution control, Imports, Incorporation by reference, Vessels, Reporting and recordkeeping requirements.

#### **40 CFR Parts 1065 and 1066**

Administrative practice and procedure, Air pollution control, Incorporation by reference, Reporting and recordkeeping requirements, Research.

#### **40 CFR Part 1068**

Administrative practice and procedure, Confidential business information, Imports, Incorporation by reference, Motor vehicle pollution, Penalties, Reporting and recordkeeping requirements, Warranties.

#### **49 CFR Part 512**

Administrative practice and procedure, Confidential business information, Freedom of information, Motor vehicle safety, Reporting and recordkeeping requirements.

#### **49 CFR Parts 523, 534, 535, and 537**

Fuel economy, Reporting and recordkeeping requirements.

#### **49 CFR Part 538**

Administrative practice and procedure, Fuel economy, Motor vehicles, Reporting and recordkeeping requirements.

For the reasons set out in the preamble, title 40, chapter I of the Code of Federal Regulations is proposed to be amended as set forth below.

## **PART 9—OMB Approvals Under the Paperwork Reduction Act**

■ 1. The authority citation for part 9 continues to read as follows:

**Authority:** 7 U.S.C. 135 *et seq.*, 136–136y; 15 U.S.C. 2001, 2003, 2005, 2006, 2601–2671; 21 U.S.C. 331j, 346a, 31 U.S.C. 9701; 33 U.S.C. 1251 *et seq.*, 1311, 1313d, 1314, 1318,

1321, 1326, 1330, 1342, 1344, 1345 (d) and (e), 1361; E.O. 11735, 38 FR 21243, 3 CFR, 1971–1975 Comp. p. 973; 42 U.S.C. 241, 242b, 243, 246, 300f, 300g, 300g–1, 300g–2, 300g–3, 300g–4, 300g–5, 300g–6, 300j–1, 300j–2, 300j–3, 300j–4, 300j–9, 1857 *et seq.*, 6901–6992k, 7401–7671q, 7542, 9601–9657, 11023, 11048.

■ 2. In § 9.1 the table is amended by:

■ a. Adding in numerical order by CFR designation a new undesignated center heading “Control of Emissions from

New and In-Use Heavy-Duty Highway Engines” and its entry in numerical order for “1036.825”;

■ b. Adding in numerical order by CFR designation a new undesignated center heading “Control of Emissions from New Heavy-Duty Motor Vehicles” and its entry in numerical order for “1037.825”;

■ c. Adding in numerical order by CFR designation a new undesignated center

heading “Control of NO<sub>x</sub> SO<sub>x</sub>, and PM Emissions from Marine Engines and Vessels Subject to the Marpol Protocol” and its entries in numerical order for “1043.40—through 1043.95”.

The additions read as follows:

**§ 9.1 OMB approvals under the Paperwork Reduction Act.**

\* \* \* \* \*

40 CFR citation

OMB Control No.

\* \* \* \* \*

**Control of Emissions From New and In-Use Heavy-Duty Highway Engines**

1036.825 ..... 2060–0678

\* \* \* \* \*

**Control of Emissions From New Heavy-Duty Motor Vehicles**

1037.825 ..... 2060–0678

\* \* \* \* \*

**Control of NO<sub>x</sub> SO<sub>x</sub>, and PM Emissions From Marine Engines and Vessels Subject to the Marpol Protocol**

1043.40–1043.95 ..... 2060–0641

\* \* \* \* \*

\* \* \* \* \*

**PART 22—CONSOLIDATED RULES OF PRACTICE GOVERNING THE ADMINISTRATIVE ASSESSMENT OF CIVIL PENALTIES AND THE REVOCATION/TERMINATION OR SUSPENSION OF PERMITS**

■ 3. The authority citation for part 22 continues to read as follows:

**Authority:** 7 U.S.C. 136(l); 15 U.S.C. 2615; 33 U.S.C. 1319, 1342, 1361, 1415 and 1418; 42 U.S.C. 300g–3(g), 6912, 6925, 6928, 6991e and 6992d; 42 U.S.C. 7413(d), 7524(c), 7545(d), 7547, 7601 and 7607(a), 9609, and 11045.

■ 4. Section 22.1 is amended by revising paragraph (a)(2) to read as follows:

**§ 22.1 Scope of this part.**

(a) \* \* \*

(2) The assessment of any administrative civil penalty under sections 113(d), 205(c), 211(d) and 213(d) of the Clean Air Act, as amended (42 U.S.C. 7413(d), 7524(c), 7545(d) and 7547(d)), and a determination of nonconforming engines, vehicles or equipment under sections 207(c) and 213(d) of the Clean Air Act, as amended (42 U.S.C. 7541(c) and 7547(d));

\* \* \* \* \*

■ 5. Section 22.34 is revised to read as follows:

**§ 22.34 Supplemental rules governing the administrative assessment of civil penalties under the Clean Air Act.**

(a) *Scope.* This section shall apply, in conjunction with §§ 22.1 through 22.32, in administrative proceedings to assess a civil penalty conducted under sections 113(d), 205(c), 211(d), and 213(d) of the Clean Air Act, as amended (42 U.S.C. 7413(d), 7524(c), 7545(d), and 7547(d)), and a determination of nonconforming engines, vehicles or equipment under sections 207(c) and 213(d) of the Clean Air Act, as amended (42 U.S.C. 7541(c) and 7547(d)). Where inconsistencies exist between this section and §§ 22.1 through 22.32, this section shall apply.

(b) *Issuance of notice.* Prior to the issuance of a final order assessing a civil penalty or a final determination of nonconforming engines, vehicles or equipment, the person to whom the order or determination is to be issued shall be given written notice of the proposed issuance of the order or determination. Service of a complaint or a consent agreement and final order pursuant to § 22.13 satisfies these notice requirements.

**PART 85—CONTROL OF AIR POLLUTION FROM MOBILE SOURCES**

■ 6. The authority citation for part 85 continues to read as follows:

**Authority:** 42 U.S.C. 7401–7671q.

**Subpart F—Exemption of Clean Alternative Fuel Conversions From Tampering Prohibition**

■ 7. Section 85.525 is revised to read as follows:

**§ 85.525 Applicable standards.**

To qualify for an exemption from the tampering prohibition, vehicles/engines that have been converted to operate on a different fuel must meet emission standards and related requirements as described in this section. The modified vehicle/engine must meet the requirements that applied for the OEM vehicle/engine, or the most stringent OEM vehicle/engine standards in any allowable grouping. Fleet average standards do not apply unless clean alternative fuel conversions are specifically listed as subject to the standards.

(a) If the vehicle/engine was certified with a Family Emission Limit for NO<sub>x</sub>, NO<sub>x</sub> + HC, NO<sub>x</sub> + NMOG, or particulate matter, as noted on the vehicle/engine emission control information label, the modified vehicle/engine may not exceed this Family Emission Limit.

(b) Compliance with greenhouse gas emission standards is demonstrated as follows:

(1) Subject to the following exceptions and special provisions, compliance with light-duty vehicle greenhouse gas



emission standards is demonstrated by complying with the N<sub>2</sub>O and CH<sub>4</sub> standards and provisions set forth in 40 CFR 86.1818–12(f)(1) and the in-use CO<sub>2</sub> exhaust emission standard set forth in 40 CFR 86.1818–12(d) as determined by the OEM for the subconfiguration that is identical to the fuel conversion emission data vehicle (EDV):

(i) If the OEM complied with the light-duty greenhouse gas standards using the fleet averaging option for N<sub>2</sub>O and CH<sub>4</sub>, as allowed under 40 CFR 86.1818–12(f)(2), the calculations of the carbon-related exhaust emissions require the input of grams/mile values for N<sub>2</sub>O and CH<sub>4</sub>, and you are not required to demonstrate compliance with the standalone CH<sub>4</sub> and N<sub>2</sub>O standards.

(ii) If the OEM complied with alternate standards for N<sub>2</sub>O and/or CH<sub>4</sub>, as allowed under 40 CFR 86.1818–12(f)(3), you may demonstrate compliance with the same alternate standards.

(iii) If the OEM complied with the nitrous oxide (N<sub>2</sub>O) and methane (CH<sub>4</sub>) standards and provisions set forth in 40 CFR 86.1818–12(f)(1) or (f)(3), and the fuel conversion CO<sub>2</sub> measured value is lower than the in-use CO<sub>2</sub> exhaust emission standard, you also have the option to convert the difference between the in-use CO<sub>2</sub> exhaust emission standard and the fuel conversion CO<sub>2</sub> measured value into GHG equivalents of CH<sub>4</sub> and/or N<sub>2</sub>O, using 298 g CO<sub>2</sub> to represent 1 g N<sub>2</sub>O and 25 g CO<sub>2</sub> to represent 1 g CH<sub>4</sub>. You may then subtract the applicable converted values from the fuel conversion measured values of CH<sub>4</sub> and/or N<sub>2</sub>O to demonstrate compliance with the CH<sub>4</sub> and/or N<sub>2</sub>O standards.

(iv) Optionally, compliance with greenhouse gas emission requirements may be demonstrated by comparing emissions from the vehicle prior to the fuel conversion to the emissions after the fuel conversion. This comparison must be based on FTP test results from the emission data vehicle (EDV) representing the pre-conversion test group. The sum of CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O shall be calculated for pre- and post-conversion FTP test results, where CH<sub>4</sub> and N<sub>2</sub>O are weighted by their global warming potentials of 25 and 298, respectively. The post-conversion sum of these emissions must be lower than the pre-conversion conversion greenhouse gas emission results. CO<sub>2</sub> emissions are calculated as specified in 40 CFR 600.113–12. If statements of compliance are applicable and accepted in lieu of measuring N<sub>2</sub>O, as permitted by EPA regulation, the comparison of the greenhouse gas results also need not

measure or include N<sub>2</sub>O in the before and after emission comparisons.

(2) Compliance with heavy-duty engine greenhouse gas emission standards is demonstrated by complying with the CO<sub>2</sub>, N<sub>2</sub>O, and CH<sub>4</sub> standards (or FELs, as applicable) and provisions set forth in 40 CFR 1036.108 for the engine family that is represented by the fuel conversion emission data engine (EDE). The following additional provisions apply:

(i) If the fuel conversion CO<sub>2</sub> measured value is lower than the CO<sub>2</sub> standard (or FEL, as applicable), you have the option to convert the difference between the CO<sub>2</sub> standard (or FEL, as applicable) and the fuel conversion CO<sub>2</sub> measured value into GHG equivalents of CH<sub>4</sub> and/or N<sub>2</sub>O, using 298 g/hp-hr CO<sub>2</sub> to represent 1 g/hp-hr N<sub>2</sub>O and 25 g/hp-hr CO<sub>2</sub> to represent 1 g/hp-hr CH<sub>4</sub>. You may then subtract the applicable converted values from the fuel conversion measured values of CH<sub>4</sub> and/or N<sub>2</sub>O to demonstrate compliance with the CH<sub>4</sub> and/or N<sub>2</sub>O standards (or FEL, as applicable).

(ii) Small volume conversion manufacturers may demonstrate compliance with N<sub>2</sub>O standards based on an engineering analysis.

(iii) For conversions of engines installed in vocational vehicles subject to Phase 2 standards under 40 CFR 1037.105 or in tractors subject to Phase 2 standards under 40 CFR 1037.106, conversion manufacturers may omit a demonstration related to the vehicle-based standards, as long as they have a reasonable technical basis for believing that the modified vehicle continues to meet those standards.

(3) Subject to the following exceptions and special provisions, compliance with greenhouse gas emission standards for heavy-duty vehicles subject to 40 CFR 1037.104 is demonstrated by complying with the N<sub>2</sub>O and CH<sub>4</sub> standards and provisions set forth in 40 CFR 1037.104 and the in-use CO<sub>2</sub> exhaust emission standard set forth in 40 CFR 1037.104(b) as determined by the OEM for the subconfiguration that is identical to the fuel conversion emission data vehicle (EDV):

(i) If the OEM complied with alternate standards for N<sub>2</sub>O and/or CH<sub>4</sub>, as allowed under 40 CFR 1037.104(c) you may demonstrate compliance with the same alternate standards.

(ii) If you are unable to meet either the N<sub>2</sub>O or CH<sub>4</sub> standards and your fuel conversion CO<sub>2</sub> measured value is lower than the in-use CO<sub>2</sub> exhaust emission standard, you may also convert the difference between the in-use CO<sub>2</sub> exhaust emission standard and the fuel conversion CO<sub>2</sub> measured value into

GHG equivalents of CH<sub>4</sub> and/or N<sub>2</sub>O, using 298 g CO<sub>2</sub> to represent 1 g N<sub>2</sub>O, and 25 g CO<sub>2</sub> to represent 1 g CH<sub>4</sub>. You may then subtract the applicable converted values from the fuel conversion measured values of CH<sub>4</sub> and/or N<sub>2</sub>O to demonstrate compliance with the CH<sub>4</sub> and/or N<sub>2</sub>O standards.

(iii) You may alternatively comply with the greenhouse gas emission requirements by comparing emissions from the vehicle before and after the fuel conversion. This comparison must be based on FTP test result from the emission data vehicle (EDV) representing the pre-conversion test group. The sum of CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O shall be calculated for pre- and post-conversion FTP test results, where CH<sub>4</sub> and N<sub>2</sub>O are weighted by their global warming potentials of 25 and 298, respectively. The post-conversion sum of these emissions must be lower than the pre-conversion greenhouse gas emission result. Calculate CO<sub>2</sub> emissions as specified in 40 CFR 600.113. If we waive N<sub>2</sub>O measurement requirements based on a statement of compliance, disregard N<sub>2</sub>O for all measurements and calculations under this paragraph (b)(3)(iii).

(c) Conversion systems for engines that would have qualified for chassis certification at the time of OEM certification may use those procedures, even if the OEM did not. Conversion manufacturers choosing this option must designate test groups using the appropriate criteria as described in this subpart and meet all vehicle chassis certification requirements set forth in 40 CFR part 86, subpart S.

#### Subpart O—Urban Bus Rebuild Requirements

■ 8. Section 85.1406 is amended by revising paragraph (f)(2) to read as follows:

##### § 85.1406 Certification.

\* \* \* \* \*

(f) \* \* \*

(2) If the equipment certifier disagrees with such determination of nonconformity and so advises the Agency, the Administrator shall afford the equipment certifier and other interested persons an opportunity to present their views and evidence in support thereof at a public hearing conducted in accordance with procedures found in 40 CFR part 1068, subpart G.

#### Subpart P—Importation of Motor Vehicles And Motor Vehicle Engines

■ 9. Section 85.1508 is amended by revising paragraph (c) to read as follows:



**§ 85.1508 “In Use” inspections and recall requirements.**

\* \* \* \* \*

(c) A certificate holder will be notified whenever the Administrator has determined that a substantial number of a class or category of the certificate holder's vehicles or engines, although properly maintained and used, do not conform to the regulations prescribed under section 202 when in actual use throughout their useful lives (as determined under section 202(d)). After such notification, the Recall Regulations at 40 CFR part 1068, subpart G, shall govern the certificate holder's responsibilities and references to a manufacturer in the Recall Regulations shall apply to the certificate holder.

■ 10. Section 85.1513 is amended by revising paragraph (e)(4) to read as follows:

**§ 85.1513 Prohibited acts; penalties.**

\* \* \* \* \*

(e) \* \* \*

(4) Hearings on suspensions and revocations of certificates of conformity or of eligibility to perform modification/testing under § 85.1509 shall be held in accordance with 40 CFR part 1068, subpart G.

\* \* \* \* \*

**Subpart R—Exclusion and Exemption of Motor Vehicles and Motor Vehicle Engines**

■ 11. Section 85.1701 is amended by revising paragraph (a)(1) to read as follows:

**§ 85.1701 General applicability.**

(a) \* \* \*

(1) Beginning January 1, 2014, the exemption provisions of 40 CFR part 1068, subpart C, apply instead of the provisions of this subpart for heavy-duty motor vehicle engines regulated under 40 CFR part 86, subpart A, except that the competition exemption of 40 CFR 1068.235 and the hardship exemption provisions of 40 CFR 1068.245, 1068.250, and 1068.255 do not apply for motor vehicle engines.

\* \* \* \* \*

■ 12. Section 85.1703 is amended by adding paragraph (b) to read as follows:

**§ 85.1703 Definition of motor vehicle.**

\* \* \* \* \*

(b) Note that, in applying the criterion in paragraph (a)(2) of this section, vehicles that are clearly intended for operation on highways are motor vehicles. Absence of a particular safety feature is relevant only when absence of that feature would prevent operation on highways.

■ 13. Section 85.1706 is amended by revising paragraph (b) to read as follows:

**§ 85.1706 Pre-certification exemption.**

\* \* \* \* \*

(b) Any manufacturer that desires a pre-certification exemption and is in the business of importing, modifying or testing uncertified vehicles for resale under the provisions of 40 CFR 85.1501, *et seq.*, must send the request to the Designated Compliance Officer as specified in 40 CFR 1068.30. The Designated Compliance Officer may require such manufacturers to submit information regarding the general nature of the fleet activities, the number of vehicles involved, and a demonstration that adequate record-keeping procedures for control purposes will be employed.

**§§ 85.1713 and 85.1714 [Removed]**

■ 14. Remove §§ 85.1713 and 85.1714.

**Subpart S—Recall Regulations**

■ 15. Subpart S is revised to read as follows:

**Subpart S—Recall Regulations****§ 85.1801 Recall regulations.**

Recall regulations apply for motor vehicles and motor vehicle engines as specified in 40 CFR part 1068, subpart G.

**Subpart T—Emission Defect Reporting Requirements**

■ 16. Section 85.1901 is revised to read as follows:

**§ 85.1901 Applicability.**

(a) The requirements of this subpart shall be applicable to all 1972 and later model year motor vehicles and motor vehicle engines, except that the provisions of 40 CFR 1068.501 apply instead for heavy-duty motor vehicle engines certified under 40 CFR part 86, subpart A, and for heavy-duty motor vehicles certified under 40 CFR part 1037 starting January 1, 2018.

(b) The requirement to report emission-related defects affecting a given class or category of vehicles or engines shall remain applicable for five years from the end of the model year in which such vehicles or engines were manufactured.

■ 17. Section 85.1902 is revised to read as follows:

**§ 85.1902 Definitions.**

For the purposes of this subpart and unless otherwise noted:

(a) *Act* means the Clean Air Act, 42 U.S.C. 7401–7671q, as amended.

(b) *Emission-related defect* means:

(1) A defect in design, materials, or workmanship in a device, system, or assembly described in the approved Application for Certification that affects any parameter or specification enumerated in appendix VIII of this part; or

(2) A defect in the design, materials, or workmanship in one or more emission-related parts, components, systems, software or elements of design which must function properly to ensure continued compliance with emission standards.

(c) *Useful life* has the meaning given in section 202(d) of the Act (42 U.S.C. 7521(d)) and regulations promulgated thereunder.

(d) *Voluntary emissions recall* means a repair, adjustment, or modification program voluntarily initiated and conducted by a manufacturer to remedy any emission-related defect for which direct notification of vehicle or engine owners has been provided, including programs to remedy defects related to emissions standards for CO<sub>2</sub>, CH<sub>4</sub>, N<sub>2</sub>O, and/or carbon-related exhaust emissions.

(e) *Ultimate purchaser* has the meaning given in section 216 of the Act (42 U.S.C. 7550).

(f) *Manufacturer* has the meaning given in section 216 of the Act (42 U.S.C. 7550).

**PART 86—CONTROL OF EMISSIONS FROM NEW AND IN-USE HIGHWAY VEHICLES AND ENGINES**

■ 18. The authority citation for part 86 continues to read as follows:

Authority: 42 U.S.C. 7401–7671q.

**Subpart A—General Provisions for Heavy-Duty Engines and Heavy-Duty Vehicles**

■ 19. Revise the heading of subpart A to read as set forth above.

**§ 86.001–35 [Removed]**

■ 20. Remove § 86.001–35.

■ 21. Section 86.004–2 is amended by revising the definition of “Emergency vehicle” to read as follows:

**§ 86.004–2 Definitions.**

\* \* \* \* \*

*Emergency vehicle* has the meaning given in 40 CFR 1037.801.

\* \* \* \* \*

■ 22. Section 86.004–25 is amended by revising paragraph (b)(4)(i) to read as follows:

**§ 86.004–25 Maintenance.**

\* \* \* \* \*

(b) \* \* \*

(4) \* \* \*

(i) For diesel-cycle heavy-duty engines, the adjustment, cleaning, repair, or replacement of the following items shall occur at 50,000 miles (or 1,500 hours) of use and at 50,000-mile (or 1,500-hour) intervals thereafter:

(A) Exhaust gas recirculation system related filters and coolers.

(B) Positive crankcase ventilation valve.

(C) Fuel injector tips (cleaning only).

(D) DEF filters.

\* \* \* \* \*

■ 23. Section 86.004–28 is amended by revising paragraph (i) introductory text and adding paragraph (j) to read as follows:

**§ 86.004–28 Compliance with emission standards.**

\* \* \* \* \*

(i) This paragraph (i) describes how to adjust emission results from model year 2020 and earlier heavy-duty engines equipped with exhaust aftertreatment to account for regeneration events. This provision only applies for engines equipped with emission controls that are regenerated on an infrequent basis. For the purpose of this paragraph (i), the term “regeneration” means an event during which emission levels change while the aftertreatment performance is being restored by design. Examples of regenerations are increasing exhaust gas temperature to remove sulfur from an adsorber or increasing exhaust gas temperature to oxidize PM in a trap. For the purpose of this paragraph (i), the term “infrequent” means having an expected frequency of less than once per transient test cycle. Calculation and use of adjustment factors are described in paragraphs (i)(1) through (5) of this section. If your engine family includes engines with one or more AECs for emergency vehicle applications approved under paragraph (4) of the definition of defeat device in § 86.004–2, do not consider additional regenerations resulting from those AECs when calculating emission factors or frequencies under this paragraph (i).

\* \* \* \* \*

(j) For model year 2021 and later engines using aftertreatment technology with infrequent regeneration events that may occur during testing, take one of the following approaches to account for the emission impact of regeneration:

(1) You may use the calculation methodology described in 40 CFR 1065.680 to adjust measured emission results. Do this by developing an upward adjustment factor and a downward adjustment factor for each pollutant based on measured emission

data and observed regeneration frequency as follows:

(i) Adjustment factors should generally apply to an entire engine family, but you may develop separate adjustment factors for different configurations within an engine family. Use the adjustment factors from this section for all testing for the engine family.

(ii) You may use carryover or carry-across data to establish adjustment factors for an engine family as described in § 86.001–24(f), consistent with good engineering judgment.

(iii) Identify the value of  $F$  in each application for the certification for which it applies.

(2) You may ask us to approve an alternate methodology to account for regeneration events. We will generally limit approval to cases where your engines use aftertreatment technology with extremely infrequent regeneration and you are unable to apply the provisions of this section.

(3) You may choose to make no adjustments to measured emission results if you determine that regeneration does not significantly affect emission levels for an engine family (or configuration) or if it is not practical to identify when regeneration occurs. If you choose not to make adjustments under paragraph (j)(1) or (2) of this section, your engines must meet emission standards for all testing, without regard to regeneration.

**§ 86.004–30—[Removed]**

■ 24. Remove § 86.004–30.

■ 25. Section 86.007–11 is amended by revising paragraphs (a)(1)(iii), (c), and (g) to read as follows:

**§ 86.007–11 Emission standards and supplemental requirements for 2007 and later model year diesel heavy-duty engines and vehicles.**

\* \* \* \* \*

(a)(1) \* \* \*

(iii) Carbon monoxide. 15.5 grams per brake horsepower-hour (5.77 grams per megajoule).

\* \* \* \* \*

(c) No crankcase emissions shall be discharged directly into the ambient atmosphere from any new 2007 or later model year diesel-cycle HDE, with the following exception: Diesel-fueled HDEs equipped with turbochargers, pumps, blowers, or superchargers for air induction may discharge crankcase emissions to the ambient atmosphere if the emissions are added to the exhaust emissions (either physically or mathematically) during all emission testing. Manufacturers taking advantage of this exception must manufacture the

engines so that all crankcase emission can be routed into a dilution tunnel (or other sampling system approved in advance by the Administrator), and must account for deterioration in crankcase emissions when determining exhaust deterioration factors. For the purpose of this paragraph (c), crankcase emissions that are routed to the exhaust upstream of exhaust aftertreatment during all operation are not considered to be “discharged directly into the ambient atmosphere.”

\* \* \* \* \*

(g) Model year 2018 and later engines at or above 56 kW that will be installed in specialty vehicles as allowed by 40 CFR 1037.605 may meet alternate emission standards as follows:

(1) The engines must be of a configuration that is identical to one that is certified under 40 CFR part 1039.

(2) Except as specified in this paragraph (g), engines certified under this paragraph (g) must meet all the requirements that apply under 40 CFR part 1039 instead of the comparable provisions in this subpart A. In your annual production report, count these engines separately and identify the vehicle manufacturers that will be installing them. Treat these engines as part of the corresponding engine family under 40 CFR part 1039 for compliance purposes such as selective enforcement audits, in-use testing, defect reporting, and recall.

(3) The engines must be labeled as described in § 86.095–35. Engines certified under this paragraph (g) may not have the label specified for nonroad engines in 40 CFR part 1039.

(4) In a separate application for a certificate of conformity, identify the corresponding nonroad engine family, describe the label required under this paragraph (g), state that you meet applicable diagnostic requirements under 40 CFR part 1039, and identify your projected U.S.-directed production volume.

(5) No additional certification fee applies for engines certified under this paragraph (g).

(6) Engines certified under this paragraph (g) may not generate or use emission credits under this part or under 40 CFR part 1039. The vehicles in which these engines are installed may generate or use emission credits as described in 40 CFR part 1037.

\* \* \* \* \*

**§ 86.007–30 [Amended]**

■ 26. Section 86.007–30 is amended by removing and reserving paragraph (d).

**§ 86.007–35 [Removed]**

■ 27. Remove § 86.007–35.

- 28. Section 86.008–10 is amended by:
  - a. Revising paragraph (a)(1)(iii);
  - b. Removing and reserving paragraph (f); and
  - c. Revising paragraph (g).
 The revisions read as follows:

**§ 86.008–10 Emission standards for 2008 and later model year Otto-cycle heavy-duty engines and vehicles.**

(a)(1) \* \* \*  
 (iii) Carbon monoxide. 14.4 grams per brake horsepower-hour (5.36 grams per megajoule).

\* \* \* \* \*

(g) Model year 2018 and later engines that will be installed in specialty vehicles as allowed by 40 CFR 1037.605 may meet alternate emission standards as follows:

(1) The engines must be of a configuration that is identical to one that is certified under 40 CFR part 1048 to the Blue Sky standards under 40 CFR 1048.140.

(2) Except as specified in this paragraph (g), engines certified under this paragraph (g) must meet all the requirements that apply under 40 CFR part 1048 instead of the comparable provisions in this subpart A. In your annual production report, count these engines separately and identify the vehicle manufacturers that will be installing them. Treat these engines as part of the corresponding engine family under 40 CFR part 1048 for compliance purposes such as production-line testing, in-use testing, defect reporting, and recall.

(3) The engines must be labeled as described in § 86.095–35. Engines certified under this paragraph (g) may not have the label specified for nonroad engines in 40 CFR part 1048.

(4) In a separate application for a certificate of conformity, identify the corresponding nonroad engine family, describe the label required under this paragraph (g), state that you meet applicable diagnostic requirements under 40 CFR part 1048, and identify your projected U.S.-directed production volume.

(5) No additional certification fee applies for engines certified under this paragraph (g).

(6) Engines certified under this paragraph (g) may not generate or use emission credits under this part. The vehicles in which these engines are installed may generate or use emission credits as described in 40 CFR part 1037.

- 29. Section 86.078–6 is revised to read as follows:

**§ 86.078–6 Hearings on certification.**

If a manufacturer's request for a hearing is approved, EPA will follow

the hearing procedures specified in 40 CFR part 1068, subpart G.

- 30. Section 86.084–4 is revised to read as follows:

**§ 86.084–4 Section numbering; construction.**

(a) The model year of initial applicability is indicated by the last two digits of the 5-digit group. A section remains in effect for subsequent model years until it is superseded. The number following the hyphen designates what previous section is replaced by a future regulation. For example, § 86.005–1 applies to model year 2005 and later vehicles and engines until it is superseded. Section 86.016–1 takes effect with model year 2016 and continues to apply until it is superseded; § 86.005–1 no longer applies starting with model year 2016, except as specified by § 86.016–1.

(b) If the regulation references a section that has been superseded or no longer exists, this should be understood as a reference to the same section for the appropriate model year. For example, if the regulation refers to § 86.001–30, it should be taken as a reference to § 86.007–30 or any later version of that section that applies for the appropriate model year. However, this does not apply if the reference to a superseded section specifically states that the older provision applies instead of any updated provisions from the section in effect for the current model year; this occurs most often as part of the transition to new emission standards.

(c) Except where indicated, the language in this subpart applies to both vehicles and engines. In many instances, language referring to engines is enclosed in parentheses and immediately follows the language discussing vehicles.

**§ 86.085–37 [Amended]**

- 31. Section 86.085–37 is amended by removing paragraph (d).

**§ 86.094–30 [Removed]**

- 32. Remove § 86.094–30.
- 33. Section 86.095–35 is amended by:
  - a. Revising paragraphs (a) introductory text, (a)(3)(iii)(B), (a)(3)(iii)(H), (I), (J), and (K);
  - b. Adding paragraph (c); and
  - c. Revising paragraph (i).

The revisions and additions read as follows:

**§ 86.095–35 Labeling.**

(a) The manufacturer of any motor vehicle (or motor vehicle engine) subject to the applicable emission standards (and family emission limits, as appropriate) of this subpart, shall, at the time of manufacture, affix a permanent

legible label, of the type and in the manner described below, containing the information hereinafter provided, to all production models of such vehicles (or engines) available for sale to the public and covered by a Certificate of Conformity under § 86.007–30(a).

\* \* \* \* \*

(3) \* \* \*

(iii) \* \* \*

(B) The full corporate name and trademark of the manufacturer; though the label may identify another company and use its trademark instead of the manufacturer's as long as the manufacturer complies with the branding provisions of 40 CFR 1068.45.

\* \* \* \* \*

(H) The prominent statement: "This engine conforms to U.S. EPA regulations applicable to XXXX Model Year New Heavy-Duty Engines.";

(I) If the manufacturer has an alternate useful life period under the provisions of § 86.094–21(f), the prominent statement: "This engine has been certified to meet U.S. EPA standards for a useful-life period of XXX miles or XXX hours of operation, whichever occurs first. This engine's actual life may vary depending on its service application." The manufacturer may alter this statement only to express the assigned alternate useful life in terms other than miles or hours (*e.g.*, years, or hours only);

(J) For diesel engines, the prominent statement: "This engine has a primary intended service application as a XXX heavy-duty engine." (The primary intended service applications are light, medium, and heavy, as defined in § 86.090–2.);

(K) For engines certified under the alternative standards specified in § 86.007–11(g) or § 86.008–10(g), the following statement: "This engine is certified for only in specialty vehicles as specified in [40 CFR 86.007–11 or 40 CFR 86.008–10]";

\* \* \* \* \*

(c) Vehicles powered by model year 2007 through 2013 diesel-fueled engines must include permanent, readily visible labels on the dashboard (or instrument panel) and near all fuel inlets that state "Use Ultra Low Sulfur Diesel Fuel Only"; or "Ultra Low Sulfur Diesel Fuel Only".

\* \* \* \* \*

(i) The Administrator may approve in advance other label content and formats, provided the alternative label contains information consistent with this section.

### Subpart E—Emission Regulations for 1978 and Later New Motorcycles, General Provisions

■ 34. Section 86.402–78 is amended by adding in alphabetical order a definition for “Round” to paragraph (a) to read as follows:

#### § 86.402–78 Definitions.

(a) \* \* \*

*Round* has the meaning given in 40 CFR 1065.1001, unless otherwise specified.

\* \* \* \* \*

■ 35. Section 86.410–2006 is amended by revising paragraph (e) introductory text to read as follows:

#### § 86.410–2006 Emission standards for 2006 and later model year motorcycles.

\* \* \* \* \*

(e) Manufacturers with fewer than 500 employees worldwide and producing fewer than 3,000 motorcycles per year for the United States are considered small-volume manufacturers for the purposes of this section. The following provisions apply for these small-volume manufacturers:

\* \* \* \* \*

#### § 86.419–78 [Removed]

■ 36. Section 86.419–78 is removed.

■ 37. Section 86.419–2006 is amended by revising paragraph (a)(1) to read as follows:

#### § 86.419–2006 Engine displacement, motorcycle classes.

(a)(1) Engine displacement shall be calculated using nominal engine values and rounded to the nearest whole cubic centimeter.

\* \* \* \* \*

■ 38. Section 86.432–78 is amended by revising paragraph (d) to read as follows:

#### § 86.432–78 Deterioration factor.

\* \* \* \* \*

(d) An exhaust emission deterioration factor will be calculated by dividing the predicted emissions at the useful life distance by the predicted emissions at the total test distance. Predicted emissions are obtained from the correlation developed in paragraph (c) of this section. Factor = Predicted total distance emissions ÷ Predicted total test distance emissions. These interpolated and extrapolated values shall be carried out to four places to the right of the decimal point before dividing one by the other to determine the deterioration factor. The results shall be rounded to three places to the right of the decimal point.

\* \* \* \* \*

■ 39. Section 86.443–78 is revised to read as follows:

#### § 86.443–78 Request for hearing.

The manufacturer may request a hearing on the Administrator's

determination as described in 40 CFR part 1068, subpart G.

■ 40. Section 86.444–78 is revised to read as follows:

#### § 86.444–78 Hearings on certification.

If a manufacturer's request for a hearing is approved, EPA will follow the hearing procedures specified in 40 CFR part 1068, subpart G.

### Subpart F—Emission Regulations for 1978 and Later New Motorcycles; Test Procedures

■ 41. Section 86.544–90 is amended by revising the introductory text and paragraph (a) to read as follows:

#### § 86.544–90 Calculations; exhaust emissions.

This section describes how to calculate exhaust emissions. Determine emission results for each pollutant to at least one more decimal place than the applicable standard. Apply the deterioration factor, then round the adjusted figure to the same number of decimal places as the emission standard. Compare the rounded emission levels to the emission standard for each emission data vehicle. In the case of NO<sub>x</sub> + HC standards, apply the deterioration factor to each pollutant and then add the results before rounding.

(a) Calculate a composite FTP emission result using the following equation:

$$Y_{wm} = 0.43 \cdot \frac{Y_{ct} + Y_s}{D_{ct} + D_s} + 0.57 \cdot \frac{Y_{ht} + Y_s}{D_{ht} + D_s}$$

Where:

$Y_{wm}$  = Weighted mass emissions of each pollutant (*i.e.*, CO<sub>2</sub>, HC, CO, or NO<sub>x</sub>) in grams per vehicle kilometer and if appropriate, the weighted carbon mass equivalent of total hydrocarbon equivalent, in grams per vehicle kilometer.

$Y_{ct}$  = Mass emissions as calculated from the transient phase of the cold-start test, in grams per test phase.

$Y_s$  = Mass emissions as calculated from the stabilized phase of the cold-start test, in grams per test phase.

$D_{ct}$  = The measured driving distance from the transient phase of the cold-start test, in kilometers.

$D_s$  = The measured driving distance from the stabilized phase of the cold-start test, in kilometers.

$Y_{ht}$  = Mass emissions as calculated from the transient phase of the hot-start test, in grams per test phase.

$D_{ht}$  = The measured driving distance from the transient phase of the hot-start test, in kilometers.

\* \* \* \* \*

### Subpart G—Selective Enforcement Auditing of New Light-Duty Vehicles, Light-Duty Trucks, and Heavy-Duty Vehicles

■ 42. Section 86.614–84 is revised to read as follows:

#### § 86.614–84 Hearings on suspension, revocation, and voiding of certificates of conformity.

The provisions of 40 CFR part 1068, subpart G, apply if a manufacturer requests a hearing regarding suspension, revocation or voiding of certificates of conformity.

■ 43. Section 86.615–84 is revised to read as follows:

#### § 86.615–84 Treatment of confidential information.

The provisions of 40 CFR 1068.10 apply for information you consider confidential.

### Subpart L—Nonconformance Penalties for Gasoline-Fueled and Diesel Heavy-Duty Engines and Heavy-Duty Vehicles, Including Light-Duty Trucks

#### § 86.1103–87 [Removed]

■ 44. Section 86.1103–87 is removed.

■ 45. Section 86.1103–2016 is added to subpart L to read as follows:

#### § 86.1103–2016 Criteria for availability of nonconformance penalties.

(a) *General.* This section describes the three criteria EPA will use to use to evaluate whether NCPs are appropriate under the Clean Air Act for a given pollutant and a given subclass of heavy-duty engines and heavy-duty vehicles.

Together, these criteria evaluate the likelihood that a manufacturer will be technologically unable to meet a standard on time. Note that since the first two of these criteria are intended to address the question of whether a given standard creates the possibility for this to occur, they are evaluated before the third criterion that addresses the likelihood that the possibility will actually happen.

(b) *Criteria.* We will establish NCPs for a given pollutant and subclass when we find that each of the following criteria is met:

(1) There is a new or revised emission standard that is more stringent than the previous standard for the pollutant, or an existing standard for that pollutant has become more difficult to achieve because of a new or revised standard. When evaluating this criterion, EPA will consider a new or revised standard to be “new” or “revised” until the point at which all manufacturers already producing U.S.-directed engines or vehicles within the subclass have achieved full compliance with the standard. For purposes of this criterion, EPA will generally not consider compliance using banked emission credits to be “full compliance”.

(2) Substantial work is required to meet the standard for which the NCP is offered, as evaluated from the point at which the standard was adopted or revised (or the point at which the standard became more difficult to meet because another standard was adopted or revised). Substantial work, as used in this paragraph (b)(2), means the application of technology not previously used in an engine or vehicle class or subclass, or the significant modification of existing technology or design parameters, needed to bring the vehicle or engine into compliance with either the more stringent new or revised standard or an existing standard which becomes more difficult to achieve because of a new or revised standard. Note that where this criterion is evaluated after the work has been completed, the criterion would be interpreted as whether or not substantial work was required to meet the standard.

(3) There is or is likely to be a technological laggard for the subclass. Note that a technological laggard is a manufacturer that is unable to meet the standard for one or more products within the subclass for technological reasons.

(c) *Evaluation.* (1) We will generally evaluate these criteria in sequence. Where we find that the first criterion has not been met, we will not consider the other two criteria. Where we find that the first criterion has been met but

not the second, we will not consider the third criterion. We may announce our findings separately or simultaneously.

(2) We may consider any available information in making our findings.

(3) Where we are uncertain whether the first and/or second criteria have been met, we may presume that they have been met and make our decision based solely on whether or not the third criterion has been met.

(4) Where we find that a manufacturer will fail to meet a standard but are uncertain whether the failure is a technological failure, we may presume that the manufacturer is a technological laggard.

#### **§ 86.1104–91 [Removed]**

■ 46. Section 86.1104–91 is removed.

■ 47. Section 86.1104–2016 is added to subpart L to read as follows:

#### **§ 86.1104–2016 Determination of upper limits.**

EPA shall set a separate upper limit for each phase of NCPs and for each service class.

(a) Except as provided in paragraphs (b), (c) and (d) of this section, the upper limit shall be set as follows:

(1) The upper limit applicable to a pollutant emission standard for a subclass of heavy-duty engines or heavy-duty vehicles for which an NCP is established in accordance with § 86.1103–87, shall be the previous pollutant emission standard for that subclass.

(2) If a manufacturer participates in any of the emissions averaging, trading, or banking programs, and carries over certification of an engine family from the prior model year, the upper limit for that engine family shall be the family emission limit of the prior model year, unless the family emission limit is less than the upper limit determined in paragraph (a)(1) of this section.

(b) If no previous standard existed for the pollutant under paragraph (a) of this section, the upper limit will be developed by EPA during rulemaking.

(c) EPA may set the upper limit during rulemaking at a level below the level specified in paragraph (a) of this section if we determine that a lower level is achievable by all engines or vehicles in that subclass.

(d) EPA may set the upper limit at a level above the level specified in paragraph (a) of this section if we determine that such level will not be achievable by all engines or vehicles in that subclass.

■ 48. Section 86.1105–87 is amended by revising paragraph (e) and removing paragraph (j).

The revision reads as follows:

#### **§ 86.1105–87 Emission standards for which nonconformance penalties are available.**

\* \* \* \* \*

(e) The values of COC50, COC90, and MC50 in paragraphs (a) and (b) of this section are expressed in December 1984 dollars. The values of COC50, COC90, and MC50 in paragraphs (c) and (d) of this section are expressed in December 1989 dollars. The values of COC50, COC90, and MC50 in paragraph (f) of this section are expressed in December 1991 dollars. The values of COC50, COC90, and MC50 in paragraphs (g) and (h) of this section are expressed in December 1994 dollars. The values of COC50, COC90, and MC50 in paragraph (i) of this section are expressed in December 2001 dollars. These values shall be adjusted for inflation to dollars as of January of the calendar year preceding the model year in which the NCP is first available by using the change in the overall Consumer Price Index, and rounded to the nearest whole dollar in accordance with 40 CFR 1065.20.

\* \* \* \* \*

■ 49. Section 86.1113–87 is amended by revising paragraphs (f) and (g)(3) introductory text to read as follows:

#### **§ 86.1113–87 Calculation and payment of penalty.**

\* \* \* \* \*

(f) A manufacturer may request a hearing under 40 CFR part 1068, subpart G, as to whether the compliance level (including a compliance level in excess of the upper limit) was determined properly.

(g) \* \* \*

(3) A manufacturer making payment under paragraph (g)(1) or (2) of this section shall submit the following information by each quarterly due date to the Designated Compliance Officer (*see* 40 CFR 1036.801). This information shall be submitted even if a manufacturer has no NCP production in a given quarter.

\* \* \* \* \*

■ 50. Section 86.1115–87 is revised to read as follows:

#### **§ 86.1115–87 Hearing procedures for nonconformance determinations and penalties.**

The provisions of 40 CFR part 1068, subpart G, apply if a manufacturer requests a hearing regarding penalties under this subpart.

#### **Subpart N—Exhaust Test Procedures for Heavy-Duty Engines**

■ 51. Section 86.1362 is amended by revising paragraph (a) to read as follows:

**§ 86.1362 Steady-state testing with a ramped-modal cycle.**

\* \* \* \* \*

(a) Measure emissions by testing the engine on a dynamometer with the following ramped-modal duty cycle to

determine whether it meets the applicable steady-state emission standards:

RMC mode	Time in mode (seconds)	Engine speed <sup>1 2</sup>	Torque (percent) <sup>2 3</sup>	CO <sub>2</sub> weighting (percent) <sup>4</sup>
1a Steady-state .....	170	Warm Idle .....	0 .....	6
1b Transition .....	20	Linear Transition .....	Linear Transition..	
2a Steady-state .....	173	A .....	100 .....	9
2b Transition .....	20	Linear Transition .....	Linear Transition..	
3a Steady-state .....	219	B .....	50 .....	10
3b Transition .....	20	B .....	Linear Transition..	
4a Steady-state .....	217	B .....	75 .....	10
4b Transition .....	20	Linear Transition .....	Linear Transition..	
5a Steady-state .....	103	A .....	50 .....	12
5b Transition .....	20	A .....	Linear Transition..	
6a Steady-state .....	100	A .....	75 .....	12
6b Transition .....	20	A .....	Linear Transition..	
7a Steady-state .....	103	A .....	25 .....	12
7b Transition .....	20	Linear Transition .....	Linear Transition..	
8a Steady-state .....	194	B .....	100 .....	9
8b Transition .....	20	B .....	Linear Transition..	
9a Steady-state .....	218	B .....	25 .....	9
9b Transition .....	20	Linear Transition .....	Linear Transition..	
10a Steady-state .....	171	C .....	100 .....	2
10b Transition .....	20	C .....	Linear Transition..	
11a Steady-state .....	102	C .....	25 .....	1
11b Transition .....	20	C .....	Linear Transition..	
12a Steady-state .....	100	C .....	75 .....	1
12b Transition .....	20	C .....	Linear Transition..	
13a Steady-state .....	102	C .....	50 .....	1
13b Transition .....	20	Linear Transition .....	Linear Transition..	
14 Steady-state .....	168	Warm Idle .....	0 .....	6

<sup>1</sup> Speed terms are defined in 40 CFR part 1065.

<sup>2</sup> Advance from one mode to the next within a 20-second transition phase. During the transition phase, command a linear progression from the speed or torque setting of the current mode to the speed or torque setting of the next mode.

<sup>3</sup> The percent torque is relative to maximum torque at the commanded engine speed.

<sup>4</sup> Use the specified weighting factors to calculate composite emission results for CO<sub>2</sub> as specified in 40 CFR 1036.501.

\* \* \* \* \*

■ 52. Section 86.1370 is amended by revising paragraphs (g) and (h) and adding paragraphs (i) and (j) to read as follows:

**§ 86.1370 Not-To-Exceed test procedures.**

\* \* \* \* \*

(g) You may exclude emission data based on catalytic aftertreatment temperatures as follows:

(1) For an engine equipped with a catalytic NO<sub>x</sub> aftertreatment system, exclude NO<sub>x</sub> emission data that is collected when the exhaust temperature at any time during the NTE event is less than 250 °C.

(2) For an engine equipped with an oxidizing catalytic aftertreatment system, exclude NMHC and CO emission data that is collected if the exhaust temperature is less than 250 °C at any time during the NTE event.

(3) Using good engineering judgment, measure exhaust temperature within 30 cm downstream of the last applicable catalytic aftertreatment device. Where there are parallel paths, use good engineering judgment to measure the temperature within 30 cm downstream of the last applicable catalytic

aftertreatment device in the path with the greatest exhaust flow.

(h) Any emission measurements corresponding to engine operating conditions that do not qualify as a valid NTE sampling event may be excluded from the determination of the vehicle-pass ratio specified in § 86.1912 for the specific pollutant.

(i) Start emission sampling at the beginning of each valid NTE sampling event, except as needed to allow for zeroing or conditioning the PEMS. For gaseous emissions, PEMS preparation must be complete for all analyzers before starting emission sampling.

(j) Emergency vehicle AECDs. If your engine family includes engines with one or more approved AECDs for emergency vehicle applications under paragraph (4) of the definition of “defeat device” in § 86.1803, the NTE emission limits do not apply when any of these AECDs are active.

### Subpart S—General Compliance Provisions for Control of Air Pollution From New and In-Use Light-Duty Vehicles, Light-Duty Trucks, and Heavy-Duty Vehicles

**§ 86.1801–12 [Amended]**

■ 53. Section 86.1801–12 is amended by removing and reserving paragraph (a)(2)(ii).

■ 54. Section 86.1802–01 is revised to read as follows:

**§ 86.1802–01 Section numbering; construction.**

(a) Section numbering. The model year of initial applicability is indicated by the section number. The two digits following the hyphen designate the first model year for which a section is applicable. The section continues to apply to subsequent model years unless a later model year section is adopted. Example: Section 86.18xx–10 applies to model year 2010 and later vehicles. If a § 86.18xx–17 is promulgated, it would apply beginning with the 2017 model year; § 86.18xx–10 would apply only to model years 2010 through 2016, except as specified in § 86.18xx–17.

(b) A section reference without a model year suffix refers to the section applicable for the appropriate model year.

(c) If the regulation references a section that has been superseded or no longer exists, this should be understood as a reference to the same section for the appropriate model year. For example, if the regulation refers to § 86.1845–01, it should be taken as a reference to § 86.1845–04 or any later version of § 86.1845 that applies for the appropriate model year. However, this does not apply if the reference to a superseded section specifically states that the older provision applies instead of any updated provisions from the section in effect for the current model year; this occurs most often as part of the transition to new emission standards.

■ 55. Section 86.1803–01 is amended as follows:

■ a. By revising the definitions for “Base level”, “Base tire”, “Base vehicle”, and “Basic engine”.

■ b. By adding a definition for “Cab-complete vehicle”.

■ c. By revising the definitions for “Carbon-related exhaust emissions (CREE)”, “Configuration”, paragraph (1) of “Emergency vehicle”, “Engine code”, “Highway Fuel Economy Test Procedure (HFET)”, “Mild hybrid electric vehicle”, “Model type”, “Production volume”, “Strong hybrid electric vehicle”, “Subconfiguration”, “Transmission class”, and “Transmission configuration”.

■ d. By adding a definitions for “Transmission type”.

The revisions and additions read as follows:

#### § 86.1803–01 Definitions.

\* \* \* \* \*

*Base level* has the meaning given in 40 CFR 600.002.

*Base tire* has the meaning given in 40 CFR 600.002.

*Base vehicle* has the meaning given in 40 CFR 600.002.

*Basic engine* has the meaning given in 40 CFR 600.002.

\* \* \* \* \*

*Cab-complete vehicle* means a heavy-duty vehicle that is first sold as an incomplete vehicle that substantially includes its cab. Vehicles known commercially as chassis-cabs, cab-chassis, box-deletes, bed-deletes, cut-away vans are considered cab-complete vehicles. For purposes of this definition, a cab includes a steering column and passenger compartment. Note that a vehicle lacking some components of the

cab is a cab-complete vehicle if it substantially includes the cab.

\* \* \* \* \*

*Carbon-related exhaust emissions (CREE)* has the meaning given in 40 CFR 600.002.

\* \* \* \* \*

*Configuration* means one of the following:

(1) For LDV, LDT, and MDPV, *configuration* means a subclassification within a test group which is based on engine code, inertia weight class, transmission type and gear ratios, final drive ratio, and other parameters which may be designated by the Administrator.

(2) For HDV, *configuration* has the meaning given in § 86.1819–14(d)(12).

\* \* \* \* \*

*Emergency vehicle* \* \* \*

(1) For the greenhouse gas emission standards in §§ 86.1818 and 86.1819, *emergency vehicle* means a motor vehicle manufactured primarily for use as an ambulance or combination ambulance-hearse or for use by the United States Government or a State or local government for law enforcement.

\* \* \* \* \*

*Engine code* means one of the following:

(1) For LDV, LDT, and MDPV, *engine code* means a unique combination within a test group of displacement, fuel injection (or carburetor) calibration, choke calibration, distributor calibration, auxiliary emission control devices, and other engine and emission control system components specified by the Administrator. For electric vehicles, engine code means a unique combination of manufacturer, electric traction motor, motor configuration, motor controller, and energy storage device.

(2) For HDV, *engine code* has the meaning given in § 86.1819–14(d)(12).

\* \* \* \* \*

*Highway Fuel Economy Test Procedure (HFET)* has the meaning given in 40 CFR 600.002.

\* \* \* \* \*

*Mild hybrid electric vehicle* means a hybrid electric vehicle that has start/stop capability and regenerative braking capability, where the recovered energy over the Federal Test Procedure is at least 15 percent but less than 65 percent of the total braking energy, as measured and calculated according to § 600.116–12(d).

*Model type* has the meaning given in 40 CFR 600.002.

\* \* \* \* \*

*Production volume* has the meaning given in 40 CFR 600.002.

\* \* \* \* \*

*Strong hybrid electric vehicle* means a hybrid electric vehicle that has start/stop capability and regenerative braking capability, where the recovered energy over the Federal Test Procedure is at least 65 percent of the total braking energy, as measured and calculated according to § 600.116–12(d).

*Subconfiguration* means one of the following:

(1) For LDV, LDT, and MDPV, *subconfiguration* has the meaning given in 40 CFR 600.002.

(2) For HDV, *subconfiguration* has the meaning given in § 86.1819–14(d)(12).

\* \* \* \* \*

*Transmission class* has the meaning given in 40 CFR 600.002.

*Transmission configuration* has the meaning given in 40 CFR 600.002.

*Transmission type* means the basic type of the transmission (e.g., automatic, manual, automated manual, semi-automatic, or continuously variable) and does not include the drive system of the vehicle (e.g., front-wheel drive, rear-wheel drive, or four-wheel drive).

\* \* \* \* \*

■ 56. Section 86.1805–17 is amended by revising paragraph (b) to read as follows:

#### § 86.1805–17 Useful life.

\* \* \* \* \*

(b) *Greenhouse gas pollutants*. The emission standards in § 86.1818 apply for a useful life of 10 years or 120,000 miles for LDV and LLDT and 11 years or 120,000 miles for HLDT and MDPV. For non-MDPV heavy-duty vehicles, the emission standards in § 86.1819 apply for a useful life of 11 years or 120,000 miles through model year 2020, and for a useful life of 15 years or 150,000 miles in model year 2021 and later. Manufacturers may certify based on the useful life as specified in paragraph (d) of this section if it is different than the useful life specified in this paragraph (b).

\* \* \* \* \*

■ 57. Section 86.1811–17 is amended by revising paragraph (g) to read as follows:

#### § 86.1811–17 Exhaust emission standards for light-duty vehicles, light-duty trucks and medium-duty passenger vehicles.

\* \* \* \* \*

(g) *Cold temperature exhaust emission standards*. The standards in this paragraph (g) apply for certification and in-use vehicles tested over the test procedures specified in subpart C of this part. These standards apply only to gasoline-fueled vehicles. Multi-fuel, bi-fuel or dual-fuel vehicles must comply with requirements using gasoline only. Testing with other fuels such as a high-level ethanol-gasoline blend, or testing on diesel vehicles, is not required.

(1) *Cold temperature CO standards.* Cold temperature CO exhaust emission standards apply for testing at both low-altitude conditions and high-altitude conditions as follows:

(i) For LDV and LDT1, the standard is 10.0 g/mile CO.

(ii) For LDT2, LDT3 and LDT4, the standard is 12.5 grams per mile CO.

(2) *Cold temperature NMHC standards.* The following fleet average cold temperature NMHC standards apply as follows:

(i) The standards are shown in the following table:

TABLE 5 OF § 86.1811–17—FLEET AVERAGE COLD TEMPERATURE NMHC EXHAUST EMISSION STANDARDS

Vehicle weight category	Cold temperature NMHC sales-weighted fleet average standard (g/mile)
LDV and LLDT .....	0.3
HLDT .....	0.5

(ii) The manufacturer must calculate its fleet average cold temperature NMHC emission level(s) as described in § 86.1864–10(m).

(iii) The standards specified in this paragraph (g)(2) apply only for testing at low-altitude conditions. However, manufacturers must submit an engineering evaluation indicating that common calibration approaches are utilized at high altitudes. Any deviation from low altitude emission control practices must be included in the auxiliary emission control device (AECD) descriptions submitted at certification. Any AECD specific to high altitude must require engineering emission data for EPA evaluation to quantify any emission impact and validity of the AECD.

\* \* \* \* \*

■ 58. Section 86.1816–18 is amended by revising paragraphs (a) introductory text, (b)(7)(i) introductory text, and (b)(9) to read as follows:

**§ 86.1816–18 Emission standards for heavy-duty vehicles.**

(a) *Applicability and general provisions.* This section describes exhaust emission standards that apply for model year 2018 and later complete heavy-duty vehicles. These standards are optional for incomplete heavy-duty vehicles and for heavy duty vehicles above 14,000 pounds GVWR as described in § 86.1801. Greenhouse gas emission standards are specified in

§ 86.1818 for MDPV and in § 86.1819 for other HDV. See § 86.1813 for evaporative and refueling emission standards. This section may apply to vehicles before model year 2018 as specified in paragraph (b)(11) of this section. Separate requirements apply for MDPV as specified in § 86.1811. See subpart A of this part for requirements that apply for incomplete heavy-duty vehicles and for heavy-duty engines certified independent of the chassis. The following general provisions apply:

\* \* \* \* \*

(b) \* \* \*

(7) \* \* \*

(i) The fleet-average FTP emission standard for NMOG+NO<sub>x</sub> phases in over several years as described in this paragraph (b)(7)(i). You must identify FELs as described in paragraph (b)(4) of this section and calculate a fleet-average emission level to show that you meet the FTP emission standard for NMOG+NO<sub>x</sub> that applies for each model year. You may certify using transitional bin standards specified in Table 5 of this section through model year 2021; these vehicles are subject to the FTP emission standard for formaldehyde as described in § 86.1818–08. You may use the E0 test fuel specified in § 86.113 for gasoline-fueled vehicles certified to the transitional bins; the useful life period for these vehicles is 120,000 miles or 11 years. Fleet-average FTP emission standards decrease as shown in the following table:

\* \* \* \* \*

(9) Except as specified in paragraph (b)(8) of this section, you may not use credits generated from vehicles certified under § 86.1816–08 for demonstrating compliance with the Tier 3 standards.

\* \* \* \* \*

■ 59. Section 86.1818–12 is amended by revising paragraphs (a)(2), (c)(4), and (f)(4) to read as follows:

**§ 86.1818–12 Greenhouse gas emission standards for light-duty vehicles, light-duty trucks, and medium-duty passenger vehicles.**

(a) \* \* \*

(2) The standards specified in this section apply for testing at both low-altitude conditions and high-altitude conditions. However, manufacturers must submit an engineering evaluation indicating that common calibration approaches are utilized at high altitude instead of performing testing for certification, consistent with § 86.1829. Any deviation from low altitude emission control practices must be included in the auxiliary emission control device (AECD) descriptions submitted at certification. Any AECD

specific to high altitude requires engineering emission data for EPA evaluation to quantify any emission impact and determine the validity of the AECD.

\* \* \* \* \*

(c) \* \* \*

(4) *Emergency vehicles.* Emergency vehicles may be excluded from the emission standards described in this section. The manufacturer must notify the Administrator that they are making such an election in the model year reports required under § 600.512 of this chapter. Such vehicles should be excluded from both the calculation of the fleet average standard for a manufacturer under this paragraph (c) and from the calculation of the fleet average carbon-related exhaust emissions in § 600.510–12.

\* \* \* \* \*

(f) \* \* \*

(4) *CO<sub>2</sub>-equivalent debits.* CO<sub>2</sub>-equivalent debits for test groups using an alternative N<sub>2</sub>O and/or CH<sub>4</sub> standard as determined under paragraph (f)(3) of this section shall be calculated according to the following equation and rounded to the nearest whole megagram:

$$\text{Debits} = [\text{GWP} \times (\text{Production}) \times (\text{AltStd} - \text{Std}) \times \text{VLM}] \div 1,000,000$$

Where:

Debits = CO<sub>2</sub>-equivalent debits for N<sub>2</sub>O or CH<sub>4</sub>, in Megagrams, for a test group using an alternative N<sub>2</sub>O or CH<sub>4</sub> standard, rounded to the nearest whole Megagram; GWP = 25 if calculating CH<sub>4</sub> debits and 298 if calculating N<sub>2</sub>O debits;

Production = The number of vehicles of that test group domestically produced plus those imported as defined in § 600.511 of this chapter;

AltStd = The alternative standard (N<sub>2</sub>O or CH<sub>4</sub>) selected by the manufacturer under paragraph (f)(3) of this section;

Std = The exhaust emission standard for N<sub>2</sub>O or CH<sub>4</sub> specified in paragraph (f)(1) of this section; and

VLM = 195,264 for passenger automobiles and 225,865 for light trucks.

\* \* \* \* \*

■ 60. Section 86.1819–14 is added to subpart S to read as follows:

**§ 86.1819–14 Greenhouse gas emission standards for heavy-duty vehicles.**

This section describes exhaust emission standards for CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O for heavy-duty vehicles. The standards of this section apply for model year 2014 and later vehicles that are chassis-certified with respect to criteria pollutants under this subpart S. Additional heavy-duty vehicles may be optionally subject to the standards of this section as allowed under paragraph (j) of this section. Any heavy-duty vehicles not subject to standards under



this section are instead subject to greenhouse gas standards under 40 CFR part 1037, and engines installed in these vehicles are subject to standards under 40 CFR part 1036. If you are not the engine manufacturer, you must notify the engine manufacturer that its engines are subject to 40 CFR part 1036 if you intend to use their engines in vehicles that are not subject to standards under this section. Vehicles produced by small businesses may be excluded from the standards of this section as described in paragraph (k)(5) of this section.

(a) *Fleet-average CO<sub>2</sub> emission standards.* Fleet-average CO<sub>2</sub> emission standards apply for the full useful life for each manufacturer as follows:

(1) Calculate a work factor, *WF*, for each vehicle subconfiguration (or group

of subconfigurations as allowed under paragraph (a)(4) of this section), rounded to the nearest pound, using the following equation:

$$WF = 0.75 \times (GVWR - \text{Curb Weight} + xwd) + 0.25 \times (GCWR - GVWR)$$

Where:

*xwd* = 500 pounds if the vehicle has four-wheel drive or all-wheel drive; *xwd* = 0 pounds for all other vehicles.

(2) Using the appropriate work factor, calculate a target value for each vehicle subconfiguration (or group of subconfigurations as allowed under paragraph (a)(4) of this section) you produce using one of the following equations, or the phase-in provisions in paragraph (k)(4) of this section, rounding to the nearest whole g/mile:

(i) For model year 2027 and later vehicles with spark-ignition engines: *CO<sub>2</sub> Target* (g/mile) = 0.0369 × *WF* + 284

(ii) For model year 2027 and later vehicles with compression-ignition engines or with no engines (such as electric vehicles and fuel cell vehicles): *CO<sub>2</sub> Target* (g/mile) = 0.0348 × *WF* + 268

(3) Calculate a production-weighted average of the target values and round it to the nearest whole g/mile. This is your fleet-average standard. All vehicles subject to the standards of this section form a single averaging set. Use the following equation to calculate your fleet-average standard from the target value for each vehicle subconfiguration (*Target<sub>i</sub>*) and U.S.-directed production volume of each vehicle subconfiguration for the given model year (*Volume<sub>i</sub>*):

$$\text{Fleet-Average Standard} = \frac{\sum [\text{Target}_i \times \text{Volume}_i]}{\sum [\text{Volume}_i]}$$

(4) You may group subconfigurations within a configuration together for purposes of calculating your fleet-average standard as follows:

(i) You may group together subconfigurations that have the same equivalent test weight (ETW), GVWR, and GCWR. Calculate your work factor and target value assuming a curb weight equal to two times ETW minus GVWR.

(ii) You may group together other subconfigurations if you use the lowest target value calculated for any of the subconfigurations.

(5) The standards specified in this section apply for testing at both low-altitude conditions and high-altitude conditions. However, manufacturers must submit an engineering evaluation indicating that common calibration approaches are utilized at high altitude instead of performing testing for certification, consistent with § 86.1829. Any deviation from low altitude emission control practices must be included in the auxiliary emission control device (AECD) descriptions submitted at certification. Any AECD specific to high altitude requires engineering emission data for EPA evaluation to quantify any emission impact and determine the validity of the AECD.

(b) *Production and in-use CO<sub>2</sub> standards.* Each vehicle you produce that is subject to the standards of this section has an “in-use” CO<sub>2</sub> standard that is calculated from your test result and that applies for selective enforcement audits and in-use testing. This in-use CO<sub>2</sub> standard for each

vehicle is equal to the applicable deteriorated emission level multiplied by 1.10 and rounded to the nearest whole g/mile.

(c) *N<sub>2</sub>O and CH<sub>4</sub> standards.* Except as allowed under this paragraph (c), all vehicles subject to the standards of this section must comply with an N<sub>2</sub>O standard of 0.05 g/mile and a CH<sub>4</sub> standard of 0.05 g/mile when calculated according to the provisions of paragraph (d)(4) of this section. You may specify CH<sub>4</sub> and/or N<sub>2</sub>O alternative standards using CO<sub>2</sub> emission credits instead of these otherwise applicable emission standards for one or more test groups. To do this, calculate the CH<sub>4</sub> and/or N<sub>2</sub>O emission credits needed (negative credits) using the equation in this paragraph (c) based on the FEL(s) you specify for your vehicles during certification. You must adjust the calculated emissions by the global warming potential (*GWP*): *GWP* equals 25 for CH<sub>4</sub> and 298 for N<sub>2</sub>O. This means you must use 25 Mg of positive CO<sub>2</sub> credits to offset 1 Mg of negative CH<sub>4</sub> credits and 298 Mg of positive CO<sub>2</sub> credits to offset 1 Mg of negative N<sub>2</sub>O credits. Note that § 86.1818–12(f) does not apply for vehicles subject to the standards of this section. Calculate credits using the following equation:

$$\text{CO}_2 \text{ Credits Needed (Mg)} = [(FEL - Std) \times (U.S.-directed production volume) \times (Useful Life)] \times (GWP) \div 1,000,000$$

(d) *Compliance provisions.* The following compliance provisions apply instead of other provisions described in this subpart S:

(1) The CO<sub>2</sub> standards of this section apply with respect to CO<sub>2</sub> emissions, not with respect to carbon-related exhaust emissions (CREE).

(2) The following general credit provisions apply:

(i) Credits you generate under this section may be used only to offset credit deficits under this section. You may bank credits for use in a future model year in which your average CO<sub>2</sub> level exceeds the standard. You may trade credits to another manufacturer according to § 86.1865–12(k)(8). Before you bank or trade credits, you must apply any available credits to offset a deficit if the deadline to offset that credit deficit has not yet passed.

(ii) Vehicles subject to the standards of this section are included in a single greenhouse gas averaging set separate from any averaging set otherwise included in this subpart S.

(iii) Banked CO<sub>2</sub> credits keep their full value for five model years after the year in which they were generated. Unused credits may not be used for more than five model years after the model year in which the credits are generated.

(3) Special credit and incentive provisions related to air conditioning in §§ 86.1867 and 86.1868 do not apply for vehicles subject to the standards of this section.

(4) Measure emissions using the procedures of subpart B of this part and 40 CFR part 1066. Determine separate emission results for the Federal Test Procedure (FTP) described in 40 CFR 1066.801(c)(1) and the Highway Fuel Economy Test (HFET) described in 40 CFR 1066.801(c)(3). Calculate composite

emission results from these two test cycles for demonstrating compliance with the CO<sub>2</sub>, N<sub>2</sub>O, and CH<sub>4</sub> standards based on a weighted average of the FTP (55%) and HFET (45%) emission results. Note that this differs from the way the criteria pollutant standards apply.

(5) Apply an additive deterioration factor of zero to measured CO<sub>2</sub> emissions unless good engineering judgment indicates that emissions are likely to deteriorate in use. Use good engineering judgment to develop separate deterioration factors for N<sub>2</sub>O and CH<sub>4</sub>.

(6) Credits are calculated using the useful life value (in miles) in place of "vehicle lifetime miles" as specified in § 86.1865. Calculate a total credit or debit balance in a model year by adding credits and debits from § 86.1865–12(k)(4), subtracting any CO<sub>2</sub>-equivalent debits for N<sub>2</sub>O or CH<sub>4</sub> calculated according to paragraph (c) of this section, and adding any of the following credits:

(i) Off-cycle technology credits according to paragraph (d)(13) of this section.

(ii) Early credits from vehicles certified under paragraph (k)(2) of this section.

(iii) Advanced technology credits according to paragraph (k)(7) of this section.

(7) [Reserved]

(8) The provisions of § 86.1818 do not apply.

(9) Calculate your fleet-average emission rate consistent with good engineering judgment and the provisions of § 86.1865. The following additional provisions apply:

(i) Unless we approve a lower number, you must test at least ten subconfigurations. If you produce more than 100 subconfigurations in a given model year, you must test at least ten percent of your subconfigurations. For purposes of this paragraph (d)(9)(i), count carryover tests, but do not include analytically derived CO<sub>2</sub> emission rates, data substitutions, or other untested allowances. We may approve a lower number of tests for manufacturers that have limited product offerings, or low sales volumes. Note that good engineering judgment and other provisions of this part may require you to test more subconfigurations than these minimum values.

(ii) The provisions of paragraph (g) of this section specify how you may use analytically derived CO<sub>2</sub> emission rates.

(iii) At least 90 percent of final production volume at the configuration level must be represented by test data (real, data substituted, or analytical).

(iv) Perform fleet-average CO<sub>2</sub> calculations as described in § 86.1865 and 40 CFR part 600, with the following exceptions:

(A) Use CO<sub>2</sub> emissions values for all test results, intermediate calculations, and fleet average calculations instead of the carbon-related exhaust emission (CREE) values specified in this subpart S and 40 CFR part 600.

(B) Perform intermediate CO<sub>2</sub> calculations for subconfigurations within each configuration using the subconfiguration and configuration definitions in paragraph (d)(12) of this section.

(C) Perform intermediate CO<sub>2</sub> calculations for configurations within each test group and transmission type (instead of configurations within each base level and base levels within each model type). Use the configuration definition in paragraph (d)(12)(i) of this section.

(D) Do not perform intermediate CO<sub>2</sub> calculations for each base level or for each model type. Base level and model type CO<sub>2</sub> calculations are not applicable to heavy-duty vehicles subject to standards in this section.

(E) Determine fleet average CO<sub>2</sub> emissions for heavy-duty vehicles subject to standards in this section as described in 40 CFR 600.510–12(j), except that the calculations must be performed on the basis of test group and transmission type (instead of the model-type basis specified in the light-duty vehicle regulations), and the calculations for dual fuel, multi-fuel, and flexible fuel vehicles must be consistent with the provisions of paragraph (d)(10)(i) of this section.

(10) For dual-fuel, multi-fuel, and flexible-fuel vehicles, perform exhaust testing on each fuel type (for example, gasoline and E85).

(i) For your fleet-average calculations, use either the conventional-fueled CO<sub>2</sub> emission rate or a weighted average of your emission results as specified in 40 CFR 600.510–12(k) for light-duty trucks.

(ii) If you certify to an alternate standard for N<sub>2</sub>O or CH<sub>4</sub> emissions, you may not exceed the alternate standard when tested on either fuel.

(11) Test your vehicles with an equivalent test weight based on its Adjusted Loaded Vehicle Weight (ALVW). Determine equivalent test weight from the ALVW as specified in 40 CFR 1066.805; round ALVW values above 14,000 pounds to the nearest 500 pound increment.

(12) The following definitions apply for the purposes of this section:

(i) *Configuration* means a subclassification within a test group based on engine code, transmission type

and gear ratios, final drive ratio, and other parameters we designate. Engine code means the combination of both "engine code" and "basic engine" as defined in 40 CFR 600.002.

(ii) *Subconfiguration* means a unique combination within a vehicle configuration (as defined in this paragraph (d)(12)) of equivalent test weight, road-load horsepower, and any other operational characteristics or parameters that we determine may significantly affect CO<sub>2</sub> emissions within a vehicle configuration. Note that for vehicles subject to standards of this section, equivalent test weight (ETW) is based on the ALVW of the vehicle as outlined in paragraph (d)(11) of this section.

(13) This paragraph (d)(13) applies for CO<sub>2</sub> reductions resulting from technologies that were not in common use before 2010 that are not reflected in the specified test procedures. These may be described as off-cycle or innovative technologies. We may allow you to generate emission credits consistent with the provisions of § 86.1869–12(c) and (d). You do not need to provide justification for not using the 5-cycle methodology.

(14) You must submit pre-model year reports before you submit your applications for certification for a given model year. Unless we specify otherwise, include the information specified for pre-model year reports in 49 CFR 535.8.

(15) You must submit a final report within 90 days after the end of the model year. Unless we specify otherwise, include applicable information identified in § 86.1865–12(l), 40 CFR 600.512, and 49 CFR 535.8(e). The final report must include at least the following information:

(i) Model year.

(ii) Applicable fleet-average CO<sub>2</sub> standard.

(iii) Calculated fleet-average CO<sub>2</sub> value and all the values required to calculate the CO<sub>2</sub> value.

(iv) Number of credits or debits incurred and all values required to calculate those values.

(v) Resulting balance of credits or debits.

(vi) N<sub>2</sub>O emissions.

(vii) CH<sub>4</sub> emissions.

(viii) Total and percent leakage rates under paragraph (h) of this section.

(e) *Useful life*. The exhaust emission standards of this section apply for the full useful life, as described in § 86.1805.

(f) [Reserved]

(g) *Analytically derived CO<sub>2</sub> emission rates (ADCs)*. This paragraph (g) describes an allowance to use estimated

(i.e., analytically derived) CO<sub>2</sub> emission rates based on baseline test data instead of measured emission rates for calculating fleet-average emissions. Note that these ADCs are similar to ADFEs used for light-duty vehicles. Note also that F terms used in this paragraph (g) represent coefficients from the following road load equation:

$$Force = F_0 + F_1 \cdot (velocity) + F_2 \cdot (velocity)^2$$

(1) Except as specified in paragraph (g)(2) of this section, use the following equation to calculate the ADC of a new vehicle from road load force coefficients ( $F_0$ ,  $F_1$ ,  $F_2$ ), axle ratio, and test weight:

$$ADC = CO_{2base} + 2.18 \cdot \Delta F_0 + 37.4 \cdot \Delta F_1 + 2257 \cdot \Delta F_2 + 189 \cdot \Delta AR + 0.0222 \cdot \Delta ETW$$

Where:

$ADC$  = Analytically derived combined city/highway CO<sub>2</sub> emission rate (g/mile) for a new vehicle.

$CO_{2base}$  = Combined city/highway CO<sub>2</sub> emission rate (g/mile) of a baseline vehicle.

$\Delta F_0$  =  $F_0$  of the new vehicle— $F_0$  of the baseline vehicle.

$\Delta F_1$  =  $F_1$  of the new vehicle— $F_1$  of the baseline vehicle.

$\Delta F_2$  =  $F_2$  of the new vehicle— $F_2$  of the baseline vehicle.

$\Delta AR$  = Axle ratio of the new vehicle—axle ratio of the baseline vehicle.

$\Delta ETW$  =  $ETW$  of the new vehicle— $ETW$  of the baseline vehicle.

(2) The purpose of this section is to accurately estimate CO<sub>2</sub> emission rates.

(i) You must apply the provisions of this section consistent with good engineering judgment. For example, do not use the equation in paragraph (g)(1) of this section where good engineering judgment indicates that it will not accurately estimate emissions. You may ask us to approve alternate equations that allow you to estimate emissions more accurately.

(ii) The analytically derived CO<sub>2</sub> equation in paragraph (g)(1) of this section may be periodically updated through publication of an EPA guidance document to more accurately characterize CO<sub>2</sub> emission levels for example, changes may be appropriate based on new test data, future technology changes, or to changes in future CO<sub>2</sub> emission levels. Any EPA guidance document will determine the model year that the updated equation takes effect. We will issue guidance no later than eight months before the effective model year. For example, model year 2014 may start January 2, 2013, so guidance for model year 2014 would be issued by May 1, 2012.

(3) You may select baseline test data without our advance approval if they meet all the following criteria:

(i) Vehicles considered for the baseline test must comply with all applicable emission standards in the model year associated with the ADC.

(ii) You must include in the pool of tests considered for baseline selection all official tests of the same or equivalent basic engine, transmission class, engine code, transmission code, engine horsepower, dynamometer drive wheels, and compression ratio as the ADC subconfiguration. Do not include tests in which emissions exceed any applicable standard.

(iii) Where necessary to minimize the CO<sub>2</sub> adjustment, you may supplement the pool with tests associated with worst-case engine or transmission codes and carryover or carry-across engine families. If you do, all the data that qualify for inclusion using the elected worst-case substitution (or carryover or carry-across) must be included in the pool as supplemental data (i.e., individual test vehicles may not be selected for inclusion). You must also include the supplemental data in all subsequent pools, where applicable.

(iv) Tests previously used during the subject model year as baseline tests in ten other ADC subconfigurations must be eliminated from the pool.

(v) Select the tested subconfiguration with the smallest absolute difference between the ADC and the test CO<sub>2</sub> emission rate for combined emissions. Use this as the baseline test for the target ADC subconfiguration.

(4) You may ask us to allow you to use baseline test data not fully meeting the provisions of paragraph (g)(3) of this section.

(5) Calculate the ADC rounded to the nearest whole g/mile. Except with our advance approval, the downward adjustment of ADC from the baseline is limited to ADC values 20 percent below the baseline emission rate. The upward adjustment is not limited.

(6) You may not submit an ADC if an actual test has been run on the target subconfiguration during the certification process or on a development vehicle that is eligible to be declared as an emission-data vehicle.

(7) No more than 40 percent of the subconfigurations tested in your final CO<sub>2</sub> submission may be represented by ADCs.

(8) Keep the following records for at least five years, and show them to us if we ask to see them:

(i) The pool of tests.

(ii) The vehicle description and tests chosen as the baseline and the basis for the selection.

(iii) The target ADC subconfiguration.

(iv) The calculated emission rates.

(9) We may perform or order a confirmatory test of any subconfiguration covered by an ADC.

(10) Where we determine that you did not fully comply with the provisions of this paragraph (g), we may require that you comply based on actual test data and that you recalculate your fleet-average emission rate.

(h) *Air conditioning leakage.* Loss of refrigerant from your air conditioning systems may not exceed a total leakage rate of 11.0 grams per year or a percent leakage rate of 1.50 percent per year, whichever is greater. Calculate the total leakage rate in g/year as specified in § 86.1867–12(a). Calculate the percent leakage rate as: [total leakage rate (g/yr)] ÷ [total refrigerant capacity (g)] × 100. Round your percent leakage rate to the nearest one-hundredth of a percent.

(1) For purpose of this requirement, “refrigerant capacity” is the total mass of refrigerant recommended by the vehicle manufacturer as representing a full charge. Where full charge is specified as a pressure, use good engineering judgment to convert the pressure and system volume to a mass.

(2) If your system uses a refrigerant other than HFC–134a that is listed as an acceptable substitute refrigerant for heavy-duty vehicles under 40 CFR part 82, subpart G, and the substitute refrigerant is identified in § 86.1867–12(e), your system is deemed to meet the leakage standard in this paragraph (h), consistent with good engineering judgment, and the reporting requirement of § 86.1844–01(d)(7)(iv) does not apply. If your system uses any other refrigerant that is listed as an acceptable substitute refrigerant for heavy-duty vehicles under 40 CFR part 82, subpart G, contact us for procedures for calculating the leakage rate in a way that appropriately accounts for the refrigerant’s properties.

(i) [Reserved]

(j) *Optional GHG certification under this subpart.* You may certify certain complete or cab-complete vehicles to the GHG standards of this section. All vehicles optionally certified under this paragraph (j) are deemed to be subject to the GHG standards of this section. Note that for vehicles above 14,000 pounds GVWR and at or below 26,000 pounds GVWR, GHG certification under this paragraph (j) does not affect how you may or may not certify with respect to criteria pollutants.

(1) For GHG compliance, you may certify any complete or cab-complete spark-ignition vehicles above 14,000 pounds GVWR and at or below 26,000 pounds GVWR to the GHG standards of this section even though this section otherwise specifies that you may certify

vehicles to the GHG standards of this section only if they are chassis-certified for criteria pollutants.

(2) You may apply the provisions of this section to cab-complete vehicles based on a complete sister vehicle. In unusual circumstances, you may ask us to apply these provisions to Class 2b or Class 3 incomplete vehicles that do not meet the definition of cab-complete.

(i) Except as specified in paragraph (j)(3) of this section, for purposes of this section, a complete sister vehicle is a complete vehicle of the same vehicle configuration as the cab-complete vehicle. You may not apply the provisions of this paragraph (j) to any vehicle configuration that has a four-wheel rear axle if the complete sister vehicle has a two-wheel rear axle.

(ii) Calculate the target value for fleet-average CO<sub>2</sub> emissions under paragraph (a) or (k)(4) of this section based on the work factor value that applies for the complete sister vehicle.

(iii) Test these cab-complete vehicles using the same equivalent test weight and other dynamometer settings that apply for the complete vehicle from which you used the work factor value (the complete sister vehicle). For GHG certification, you may submit the test data from that complete sister vehicle instead of performing the test on the cab-complete vehicle.

(iv) You are not required to produce the complete sister vehicle for sale to use the provisions of this paragraph (j)(2). This means the complete sister vehicle may be a carryover vehicle from a prior model year or a vehicle created solely for the purpose of testing.

(3) For GHG purposes, if a cab-complete vehicle is not of the same vehicle configuration as a complete sister vehicle due only to certain factors unrelated to coastdown performance, you may use the road-load coefficients from the complete sister vehicle for certification testing of the cab-complete vehicle, but you may not use emission data from the complete sister vehicle for certifying the cab-complete vehicle.

(k) *Interim provisions.* The following provisions apply instead of other provisions in this subpart:

(1) *Incentives for early introduction.* Manufacturers may voluntarily certify in model year 2013 (or earlier model years for electric vehicles) to the greenhouse gas standards that apply starting in model year 2014 as specified in 40 CFR 1037.150(a).

(2) *Early credits.* To generate early credits under this paragraph (k)(2) for any vehicles other than electric vehicles, you must certify your entire U.S.-directed fleet to these standards. If you calculate a separate fleet average for

advanced-technology vehicles under paragraph (k)(7) of this section, you must certify your entire U.S.-directed production volume of both advanced and conventional vehicles within the fleet. If some test groups are certified after the start of the model year, you may generate credits only for production that occurs after all test groups are certified. For example, if you produce three test groups in an averaging set and you receive your certificates for those test groups on January 4, 2013, March 15, 2013, and April 24, 2013, you may not generate credits for model year 2013 for vehicles from any of the test groups produced before April 24, 2013. Calculate credits relative to the standard that would apply in model year 2014 using the applicable equations in this subpart and your model year 2013 U.S.-directed production volumes. These credits may be used to show compliance with the standards of this subpart for 2014 and later model years. We recommend that you notify us of your intent to use this provision before submitting your applications.

(3) *Compliance date.* Compliance with the standards of this section was optional before January 1, 2014 as specified in 40 CFR 1037.150(g).

(4) *Phase-in provisions.* Each manufacturer must choose one of the options specified in paragraphs (k)(4)(i) and (ii) of this section for phasing in the Phase 1 standards. Manufacturers must follow the schedule described in paragraph (k)(4)(iii) of this section for phasing in the Phase 2 standards.

(i) *Phase 1—Option 1.* You may implement the Phase 1 standards by applying CO<sub>2</sub> target values as specified in the following table for model year 2014 through 2020 vehicles:

TABLE 1 OF § 86.1819–14

Model year and engine cycle	Alternate CO <sub>2</sub> target (g/mile)
2014 Spark-Ignition .....	$0.0482 \times (WF) + 371$
2015 Spark-Ignition .....	$0.0479 \times (WF) + 369$
2016 Spark-Ignition .....	$0.0469 \times (WF) + 362$
2017 Spark-Ignition .....	$0.0460 \times (WF) + 354$
2018–2020 Spark-Ignition	$0.0440 \times (WF) + 339$
2014 Compression-Ignition	$0.0478 \times (WF) + 368$
2015 Compression-Ignition	$0.0474 \times (WF) + 366$
2016 Compression-Ignition	$0.0460 \times (WF) + 354$
2017 Compression-Ignition	$0.0445 \times (WF) + 343$
2018–2020 Compression-Ignition.	$0.0416 \times (WF) + 320$

(ii) *Phase 1—Option 2.* You may implement the Phase 1 standards by applying CO<sub>2</sub> target values specified in the following table for model year 2014 through 2020 vehicles:

TABLE 2 OF § 86.1819–14

Model year and engine cycle	Alternate CO <sub>2</sub> target (g/mile)
2014 Spark-Ignition .....	$0.0482 \times (WF) + 371$
2015 Spark-Ignition .....	$0.0479 \times (WF) + 369$
2016–2018 Spark-Ignition	$0.0456 \times (WF) + 352$
2019–2020 Spark-Ignition	$0.0440 \times (WF) + 339$
2014 Compression-Ignition	$0.0478 \times (WF) + 368$
2015 Compression-Ignition	$0.0474 \times (WF) + 366$
2016–2018 Compression-Ignition.	$0.0440 \times (WF) + 339$
2019–2020 Compression-Ignition.	$0.0416 \times (WF) + 320$

(iii) *Phase 2.* Apply Phase 2 CO<sub>2</sub> target values as specified in the following table for model year 2021 through 2026 vehicles:

TABLE 3 OF § 86.1819–14

Model year and engine cycle	Alternate CO <sub>2</sub> target (g/mile)
2021 Spark-Ignition .....	$0.0429 \times (WF) + 331$
2022 Spark-Ignition .....	$0.0418 \times (WF) + 322$
2023 Spark-Ignition .....	$0.0408 \times (WF) + 314$
2024 Spark-Ignition .....	$0.0398 \times (WF) + 306$
2025 Spark-Ignition .....	$0.0388 \times (WF) + 299$
2026 Spark-Ignition .....	$0.0378 \times (WF) + 291$
2021 Compression-Ignition	$0.0406 \times (WF) + 312$
2022 Compression-Ignition	$0.0395 \times (WF) + 304$
2023 Compression-Ignition	$0.0386 \times (WF) + 297$
2024 Compression-Ignition	$0.0376 \times (WF) + 289$
2025 Compression-Ignition	$0.0367 \times (WF) + 282$
2026 Compression-Ignition	$0.0357 \times (WF) + 275$

(5) *Provisions for small manufacturers.* Standards apply on a delayed schedule for manufacturers meeting the small business criteria specified in 13 CFR 121.201. Apply the small business criteria for NAICS code 336111 for vehicle manufacturers and 811198 for companies performing fuel conversions with vehicles manufactured by a different company. Qualifying manufacturers are not subject to the greenhouse gas standards of this section for vehicles built before January 1, 2019, as specified in 40 CFR 1037.150(c). The employee and revenue limits apply to the total number employees and total revenue together for affiliated companies. In addition, manufacturers producing vehicles that run on any fuel other than gasoline, E85, or diesel fuel may delay complying with every new standard under this part by one model year.

(6) *Alternate N<sub>2</sub>O standards.* Manufacturers may show compliance with the N<sub>2</sub>O standards using an engineering analysis. This allowance also applies for model year 2015 and later test groups or emission families carried over from model 2014 consistent with the provisions of § 86.1839. You may not certify to an N<sub>2</sub>O FEL different than the standard without measuring N<sub>2</sub>O emissions.

(7) *Advanced technology credits.* Credits generated from hybrid vehicles

with regenerative braking or from vehicles with other advanced technologies may be used to show compliance with any standards of this part or 40 CFR part 1036, subject to the service class restrictions in 40 CFR 1037.740. You may multiply these credits by 1.50. Include these vehicles in a separate fleet-average calculation (and exclude them from your conventional fleet-average calculation). You must first apply these advanced technology vehicle credits to any deficits for other vehicles in the averaging set before applying them to other averaging sets. Credits you generate under this paragraph (k)(7) may be used to demonstrate compliance with the CO<sub>2</sub> emission standards in 40 CFR part 1036 and part 1037. Similarly, you may use advanced-technology credits generated under 40 CFR 1036.615 or 1037.615 to demonstrate compliance with the CO<sub>2</sub> standards in this section. You may generate advanced technology credits under this paragraph (k)(7) only with Phase 1 vehicles.

(8) *Loose engine sales.* This paragraph (k)(8) applies for model year 2020 and earlier spark-ignition engines identical to engines used in vehicles certified to the standards of this section, where you sell such engines as loose engines or as engines installed in incomplete vehicles that are not cab-complete vehicles. For purposes of this paragraph (k)(8), engines would not be considered to be identical if they used different engine hardware. You may include such engines in a test group certified to the standards of this section, subject to the following provisions:

(i) Engines certified under this paragraph (k)(8) are deemed to be certified to the standards of 40 CFR 1036.108 as specified in 40 CFR 1036.150(j).

(ii) The U.S.-directed production volume of engines you sell as loose engines or installed in incomplete heavy-duty vehicles that are not cab-complete vehicles in any given model year may not exceed ten percent of the total U.S.-directed production volume of engines of that design that you produce for heavy-duty applications for that model year, including engines you produce for complete vehicles, cab-complete vehicles, and other incomplete vehicles. The total number of engines you may certify under this paragraph (k)(8), of all engine designs, may not exceed 15,000 in any model year. Engines produced in excess of either of these limits are not covered by your certificate. For example, if you produce 80,000 complete model year 2017 Class 2b pickup trucks with a certain engine and 10,000 incomplete model year 2017

Class 3 vehicles with that same engine, and you do not apply the provisions of this paragraph (k)(8) to any other engine designs, you may produce up to 10,000 engines of that design for sale as loose engines under this paragraph (k)(8). If you produced 11,000 engines of that design for sale as loose engines, the last 1,000 of them that you produced in that model year 2017 would be considered uncertified.

(iii) This paragraph (k)(8) does not apply for engines certified to the standards of 40 CFR 1036.108.

(iv) Label the engines as specified in 40 CFR 1036.135 including the following compliance statement: "THIS ENGINE WAS CERTIFIED TO THE ALTERNATE GREENHOUSE GAS EMISSION STANDARDS OF 40 CFR 1036.150(j)." List the test group name instead of an engine family name.

(v) Vehicles using engines certified under this paragraph (k)(8) are subject to the emission standards of 40 CFR 1037.105.

(vi) For certification purposes, your engines are deemed to have a CO<sub>2</sub> target value and test result equal to the CO<sub>2</sub> target value and test result for the complete vehicle in the applicable test group with the highest equivalent test weight, except as specified in paragraph (k)(8)(vi)(B) of this section. Use these values to calculate your target value, fleet-average emission rate, and in-use emission standard. Where there are multiple complete vehicles with the same highest equivalent test weight, select the CO<sub>2</sub> target value and test result as follows:

(A) If one or more of the CO<sub>2</sub> test results exceed the applicable target value, use the CO<sub>2</sub> target value and test result of the vehicle that exceeds its target value by the greatest amount.

(B) If none of the CO<sub>2</sub> test results exceed the applicable target value, select the highest target value and set the test result equal to it. This means that you may not generate emission credits from vehicles certified under this paragraph (k)(8).

(vii) State in your applications for certification that your test group and engine family will include engines certified under this paragraph (k)(8). This applies for your greenhouse gas vehicle test group and your criteria pollutant engine family. List in each application the name of the corresponding test group/engine family.

(9) *Credit adjustment for useful life.* For credits that you calculate based on a useful life of 120,000 miles, multiply any banked credits that you carry forward for use in model year 2021 and later by 1.25.

(10) *CO<sub>2</sub> rounding.* For model year 2014 and earlier vehicles, you may round measured and calculated CO<sub>2</sub> emission levels to the nearest 0.1 g/mile, instead of the nearest whole g/mile as specified in paragraphs (a), (b), and (g) of this section.

■ 61. Section 86.1823–08 is amended by revising the definition of "R" in paragraph (d)(3) to read as follows:

**§ 86.1823–08 Durability demonstration procedures for exhaust emissions.**

\* \* \* \* \*

(d) \* \* \*

(3) \* \* \*

R = Catalyst thermal reactivity coefficient. You may use a default value of 17,500 for the SBC.

\* \* \* \* \*

■ 62. Section 86.1838–01 is amended by revising paragraph (b)(1)(i)(B), adding paragraph (b)(1)(i)(C), and revising paragraph (d)(3)(iii) introductory text to read as follows:

**§ 86.1838–01 Small-volume manufacturer certification procedures.**

\* \* \* \* \*

(b) \* \* \*

(1) \* \* \*

(i) \* \* \*

(B) No small-volume sales threshold applies for the heavy-duty greenhouse gas standards; alternative small-volume criteria apply as described in § 86.1819–14(k)(4).

(C) 15,000 units for all other requirements. See § 86.1845 for separate provisions that apply for in-use testing.

\* \* \* \* \*

(d) \* \* \*

(3) \* \* \*

(iii) Notwithstanding the requirements of paragraph (d)(3)(ii) of this section, an applicant may satisfy the requirements of this paragraph (d)(3) if the requirements of this paragraph (d)(3) are completed by an auditor who is an employee of the applicant, provided that such employee:

\* \* \* \* \*

■ 63. Section 86.1844–01 is amended by adding paragraph (d)(7)(iv) to read as follows:

**§ 86.1844–01 Information requirements: Application for certification and submittal of information upon request.**

\* \* \* \* \*

(d) \* \* \*

(7) \* \* \*

(iv) For heavy-duty vehicles subject to air conditioning standards under § 86.1819, include the refrigerant leakage rates (leak scores), describe the type of refrigerant, and identify the refrigerant capacity of the air conditioning systems. If another

company will install the air conditioning system, also identify the corporate name of the final installer.

\* \* \* \* \*

■ 64. Section 86.1846–01 is amended by revising paragraph (b)(1)(i) to read as follows:

**§ 86.1846–01 Manufacturer in-use confirmatory testing requirements.**

\* \* \* \* \*

(b) \* \* \*  
(1) \* \* \*

(i) Additional testing is not required under this paragraph (b)(1) based on evaporative/refueling testing or based on low-mileage Supplemental FTP testing conducted under § 86.1845–04(b)(5)(i). Testing conducted at high altitude under the requirements of § 86.1845–04(c) will be included in determining if a test group meets the criteria triggering the testing required under this section.

\* \* \* \* \*

■ 65. Section 86.1848–10 is amended by revising paragraph (c)(9) to read as follows:

**§ 86.1848–10 Compliance with emission standards for the purpose of certification.**

\* \* \* \* \*

(c) \* \* \*

(9) For 2012 and later model year LDVs, LDTs, and MDPVs, all certificates of conformity issued are conditional upon compliance with all provisions of §§ 86.1818 and 86.1865 both during and after model year production. Similarly, for 2014 and later model year HDV, and other HDV subject to standards under § 86.1819, all certificates of conformity issued are conditional upon compliance with all provisions of §§ 86.1819 and 86.1865 both during and after model year production. The manufacturer bears the burden of establishing to the satisfaction of the Administrator that the terms and conditions upon which the certificate(s) was (were) issued were satisfied. For recall and warranty purposes, vehicles not covered by a certificate of conformity will continue to be held to the standards stated or referenced in the certificate that otherwise would have applied to the vehicles.

(i) Failure to meet the fleet average CO<sub>2</sub> requirements will be considered a failure to satisfy the terms and conditions upon which the certificate(s) was (were) issued and the vehicles sold in violation of the fleet average CO<sub>2</sub> standard will not be covered by the certificate(s). The vehicles sold in violation will be determined according to § 86.1865–12(k)(8).

(ii) Failure to comply fully with the prohibition against selling credits that

are not generated or that are not available, as specified in § 86.1865–12, will be considered a failure to satisfy the terms and conditions upon which the certificate(s) was (were) issued and the vehicles sold in violation of this prohibition will not be covered by the certificate(s).

(iii) For manufacturers using the conditional exemption under § 86.1801–12(k), failure to fully comply with the fleet production thresholds that determine eligibility for the exemption will be considered a failure to satisfy the terms and conditions upon which the certificate(s) was (were) issued and the vehicles sold in violation of the stated sales and/or production thresholds will not be covered by the certificate(s).

(iv) For manufacturers that are determined to be operationally independent under § 86.1838–01(d), failure to report a material change in their status within 60 days as required by § 86.1838–01(d)(2) will be considered a failure to satisfy the terms and conditions upon which the certificate(s) was (were) issued and the vehicles sold in violation of the operationally independent criteria will not be covered by the certificate(s).

(v) For manufacturers subject to an alternative fleet average greenhouse gas emission standard approved under § 86.1818–12(g), failure to comply with the annual sales thresholds that are required to maintain use of those standards, including the thresholds required for new entrants into the U.S. market, will be considered a failure to satisfy the terms and conditions upon which the certificate(s) was (were) issued and the vehicles sold in violation of stated sales and/or production thresholds will not be covered by the certificate(s).

\* \* \* \* \*

■ 66. Section 86.1853–01 is revised to read as follows:

**§ 86.1853–01 Certification hearings.**

If a manufacturer's request for a hearing is approved, EPA will follow the hearing procedures specified in 40 CFR part 1068, subpart G.

■ 67. Section 86.1854–12 is amended by adding paragraph (b)(5) to read as follows:

**§ 86.1854–12 Prohibited acts.**

\* \* \* \* \*

(b) \* \* \*

(5) Certified motor vehicles and motor vehicle engines and their emission control devices must remain in their certified configuration even if they are used solely for competition or if they become nonroad vehicles or engines; anyone modifying a certified motor

vehicle or motor vehicle engine for any reason is subject to the tampering and defeat device prohibitions of paragraph (a)(3) of this section and 42 U.S.C. 7522(a)(3).

■ 68. Section 86.1862–04 is amended by revising paragraph (d) to read as follows:

**§ 86.1862–04 Maintenance of records and submittal of information relevant to compliance with fleet-average standards.**

\* \* \* \* \*

(d) *Notice of opportunity for hearing.* Any voiding of the certificate under paragraph (a)(6) of this section will be made only after EPA has offered the manufacturer concerned an opportunity for a hearing conducted in accordance with 40 CFR part 1068, subpart G and, if a manufacturer requests such a hearing, will be made only after an initial decision by the Presiding Officer.

■ 69. Section 86.1865–12 is revised to read as follows:

**§ 86.1865–12 How to comply with the fleet average CO<sub>2</sub> standards.**

(a) *Applicability.* (1) Unless otherwise exempted under the provisions of paragraph (d) of this section, CO<sub>2</sub> fleet average exhaust emission standards of this subpart apply to:

(i) 2012 and later model year passenger automobiles and light trucks.

(ii) Heavy-duty vehicles subject to standards under § 86.1819.

(iii) Vehicles imported by ICLs as defined in 40 CFR 85.1502.

(2) The terms “passenger automobile” and “light truck” as used in this section have the meanings given in § 86.1818–12.

(b) *Useful life requirements.* Full useful life requirements for CO<sub>2</sub> standards are defined in §§ 86.1818 and 86.1819. There is not an intermediate useful life standard for CO<sub>2</sub> emissions.

(c) *Altitude.* Greenhouse gas emission standards apply for testing at both low-altitude conditions and at high-altitude conditions, as described in §§ 86.1818 and 86.1819.

(d) *Small volume manufacturer certification procedures.* (1) *Passenger automobiles and light trucks.*

Certification procedures for small volume manufacturers are provided in § 86.1838. Small businesses meeting certain criteria may be exempted from the greenhouse gas emission standards in § 86.1818 according to the provisions of § 86.1801–12(j) or (k).

(2) *Heavy-duty vehicles.* HDV manufacturers that qualify as small businesses are not subject to the Phase 1 greenhouse gas standards of this subpart as specified in § 86.1819–14(k)(5).

(e) *CO<sub>2</sub> fleet average exhaust emission standards.* The fleet average standards referred to in this section are the corporate fleet average CO<sub>2</sub> standards for passenger automobiles and light trucks set forth in § 86.1818–12(c) and (e), and for HDV in § 86.1819. Each manufacturer must comply with the applicable CO<sub>2</sub> fleet average standard on a production-weighted average basis, for each separate averaging set, at the end of each model year, using the procedure described in paragraph (j) of this section. The fleet average CO<sub>2</sub> standards applicable in a given model year are calculated separately for passenger automobiles and light trucks for each manufacturer and each model year according to the provisions in § 86.1818. Calculate the HDV fleet average CO<sub>2</sub> standard in a given model year as described in § 86.1819–14(a).

(f) *In-use CO<sub>2</sub> standards.* In-use CO<sub>2</sub> exhaust emission standards are provided in § 86.1818–12(d) for passenger automobiles and light trucks and in § 86.1819–14(b) for HDV.

(g) *Durability procedures and method of determining deterioration factors (DFs).* Deterioration factors for CO<sub>2</sub> exhaust emission standards are provided in § 86.1823–08(m) for passenger automobiles and light trucks and in § 86.1819–14(d)(5) for HDV.

(h) *Vehicle test procedures.* (1) The test procedures for demonstrating compliance with CO<sub>2</sub> exhaust emission standards are described at § 86.101 and 40 CFR part 600, subpart B.

(2) Testing to determine compliance with CO<sub>2</sub> exhaust emission standards must be on a loaded vehicle weight (LVW) basis for passenger automobiles and light trucks (including MDPV), and on an adjusted loaded vehicle weight (ALVW) basis for non-MDPV heavy-duty vehicles.

(3) Testing for the purpose of providing certification data is required only at low-altitude conditions. If hardware and software emission control strategies used during low-altitude condition testing are not used similarly across all altitudes for in-use operation, the manufacturer must include a statement in the application for certification, in accordance with § 86.1844–01(d)(11), stating what the different strategies are and why they are used.

(i) *Calculating fleet average carbon-related exhaust emissions for passenger automobiles and light trucks.* (1) Manufacturers must compute separate production-weighted fleet average carbon-related exhaust emissions at the end of the model year for passenger automobiles and light trucks, using actual production, where production

means vehicles produced and delivered for sale, and certifying model types to standards as defined in § 86.1818–12. The model type carbon-related exhaust emission results determined according to 40 CFR part 600, subpart F (in units of grams per mile rounded to the nearest whole number) become the certification standard for each model type.

(2) Manufacturers must separately calculate production-weighted fleet average carbon-related exhaust emissions levels for the following averaging sets according to the provisions of 40 CFR part 600, subpart F:

(i) Passenger automobiles subject to the fleet average CO<sub>2</sub> standards specified in § 86.1818–12(c)(2);

(ii) Light trucks subject to the fleet average CO<sub>2</sub> standards specified in § 86.1818–12(c)(3);

(iii) Passenger automobiles subject to the Temporary Leadtime Allowance Alternative Standards specified in § 86.1818–12(e), if applicable; and

(iv) Light trucks subject to the Temporary Leadtime Allowance Alternative Standards specified in § 86.1818–12(e), if applicable.

(j) *Certification compliance and enforcement requirements for CO<sub>2</sub> exhaust emission standards.* (1) Compliance and enforcement requirements are provided in this section and § 86.1848–10(c)(9).

(2) The certificate issued for each test group requires all model types within that test group to meet the in-use emission standards to which each model type is certified. The in-use standards for passenger automobiles and light duty trucks (including MDPV) are described in § 86.1818–12(d). The in-use standards for non-MDPV heavy-duty vehicles are described in § 86.1819–14(b).

(3) Each manufacturer must comply with the applicable CO<sub>2</sub> fleet average standard on a production-weighted average basis, at the end of each model year. Use the procedure described in paragraph (i) of this section for passenger automobiles and light trucks (including MDPV). Use the procedure described in § 86.1819(d)(9)(iv) for non-MDPV heavy-duty vehicles.

(4) Each manufacturer must comply on an annual basis with the fleet average standards as follows:

(i) Manufacturers must report in their annual reports to the Agency that they met the relevant corporate average standard by showing that the applicable production-weighted average CO<sub>2</sub> emission levels are at or below the applicable fleet average standards; or

(ii) If the production-weighted average is above the applicable fleet average

standard, manufacturers must obtain and apply sufficient CO<sub>2</sub> credits as authorized under paragraph (k)(8) of this section. A manufacturer must show that they have offset any exceedance of the corporate average standard via the use of credits. Manufacturers must also include their credit balances or deficits in their annual report to the Agency.

(iii) If a manufacturer fails to meet the corporate average CO<sub>2</sub> standard for four consecutive years, the vehicles causing the corporate average exceedance will be considered not covered by the certificate of conformity (see paragraph (k)(8) of this section). A manufacturer will be subject to penalties on an individual-vehicle basis for sale of vehicles not covered by a certificate.

(iv) EPA will review each manufacturer's production to designate the vehicles that caused the exceedance of the corporate average standard. EPA will designate as nonconforming those vehicles in test groups with the highest certification emission values first, continuing until reaching a number of vehicles equal to the calculated number of noncomplying vehicles as determined in paragraph (k)(8) of this section. In a group where only a portion of vehicles would be deemed nonconforming, EPA will determine the actual nonconforming vehicles by counting backwards from the last vehicle produced in that test group. Manufacturers will be liable for penalties for each vehicle sold that is not covered by a certificate.

(k) *Requirements for the CO<sub>2</sub> averaging, banking and trading (ABT) program.* (1) A manufacturer whose CO<sub>2</sub> fleet average emissions exceed the applicable standard must complete the calculation in paragraph (k)(4) of this section to determine the size of its CO<sub>2</sub> deficit. A manufacturer whose CO<sub>2</sub> fleet average emissions are less than the applicable standard may complete the calculation in paragraph (k)(4) of this section to generate CO<sub>2</sub> credits. In either case, the number of credits or debits must be rounded to the nearest whole number.

(2) There are no property rights associated with CO<sub>2</sub> credits generated under this subpart. Credits are a limited authorization to emit the designated amount of emissions. Nothing in this part or any other provision of law should be construed to limit EPA's authority to terminate or limit this authorization through a rulemaking.

(3) Each manufacturer must comply with the reporting and recordkeeping requirements of paragraph (l) of this section for CO<sub>2</sub> credits, including early credits. The averaging, banking and trading program is enforceable through



the certificate of conformity that allows the manufacturer to introduce any regulated vehicles into U.S. commerce.

(4) Credits are earned on the last day of the model year. Manufacturers must calculate, for a given model year and separately for passenger automobiles, light trucks, and heavy-duty vehicles, the number of credits or debits it has generated according to the following equation rounded to the nearest megagram:

$$CO_2 \text{ Credits or Debits (Mg)} = [(CO_2 \text{ Standard} - \text{Manufacturer's Production-Weighted Fleet Average } CO_2 \text{ Emissions}) \times (\text{Total Number of Vehicles Produced}) \times (\text{Mileage})] \div 1,000,000$$

Where:

*CO<sub>2</sub> Standard* = the applicable standard for the model year as determined by § 86.1818 or § 86.1819;

*Manufacturer's Production-Weighted Fleet Average CO<sub>2</sub> Emissions* = average calculated according to paragraph (i) of this section;

*Total Number of Vehicles Produced* = the number of vehicles domestically produced plus those imported as defined in § 600.511–08 of this chapter; and

*Mileage* = useful life value (in miles) for HDV, and vehicle lifetime miles of 195,264 for passenger automobiles and 225,865 for light trucks.

(5) Determine total HDV debits and credits for a model year as described in § 86.1819–14(d)(6). Determine total passenger car and light truck debits and credits for a model year as described in this paragraph (k)(5). Total credits or debits generated in a model year, maintained and reported separately for passenger automobiles and light trucks, shall be the sum of the credits or debits calculated in paragraph (k)(4) of this section and any of the following credits, if applicable, minus any CO<sub>2</sub>-equivalent debits for N<sub>2</sub>O and/or CH<sub>4</sub> calculated according to the provisions of § 86.1818–12(f)(4):

(i) Air conditioning leakage credits earned according to the provisions of § 86.1867–12(b).

(ii) Air conditioning efficiency credits earned according to the provisions of § 86.1868–12(c).

(iii) Off-cycle technology credits earned according to the provisions of § 86.1869–12(d).

(iv) Full size pickup truck credits earned according to the provisions of § 86.1870–12(c).

(v) CO<sub>2</sub>-equivalent debits for N<sub>2</sub>O and/or CH<sub>4</sub> accumulated according to the provisions of § 86.1818–12(f)(4).

(6) Unused CO<sub>2</sub> credits generally retain their full value through five model years after the model year in which they were generated. Credits

remaining at the end of the fifth model year after the model year in which they were generated may not be used to demonstrate compliance for later model years. The following particular provisions apply for passenger cars and light trucks:

(i) Unused CO<sub>2</sub> credits from the 2009 model year shall retain their full value through the 2014 model year. Credits from the 2009 model year that remain at the end of the 2014 model year may not be used to demonstrate compliance for later model years.

(ii) Unused CO<sub>2</sub> credits from the 2010 through 2015 model years shall retain their full value through the 2021 model year. Credits remaining from these model years at the end of the 2021 model year may not be used to demonstrate compliance for later model years.

(7) Credits may be used as follows:

(i) Credits generated and calculated according to the method in paragraphs (k)(4) and (5) of this section may not be used to offset deficits other than those deficits accrued within the respective averaging set, except that credits may be transferred between the passenger automobile and light truck fleets of a given manufacturer. Credits may be banked and used in a future model year in which a manufacturer's average CO<sub>2</sub> level exceeds the applicable standard. Credits may also be traded to another manufacturer according to the provisions in paragraph (k)(8) of this section. Before trading or carrying over credits to the next model year, a manufacturer must apply available credits to offset any deficit, where the deadline to offset that credit deficit has not yet passed. This paragraph (k)(7)(i) applies for MDPV, but not for other HDV.

(ii) The use of credits shall not change Selective Enforcement Auditing or in-use testing failures from a failure to a non-failure. The enforcement of the averaging standard occurs through the vehicle's certificate of conformity as described in paragraph (k)(8) of this section. A manufacturer's certificate of conformity is conditioned upon compliance with the averaging provisions. The certificate will be void ab initio if a manufacturer fails to meet the corporate average standard and does not obtain appropriate credits to cover its shortfalls in that model year or subsequent model years (see deficit carry-forward provisions in paragraph (k)(8) of this section).

(iii) The following provisions apply for passenger automobiles and light trucks under the Temporary Leadtime Allowance Alternative Standards:

(A) Credits generated by vehicles subject to the fleet average CO<sub>2</sub> standards specified in § 86.1818–12(c) may only be used to offset a deficit generated by vehicles subject to the Temporary Leadtime Allowance Alternative Standards specified in § 86.1818–12(e).

(B) Credits generated by a passenger automobile or light truck averaging set subject to the Temporary Leadtime Allowance Alternative Standards specified in § 86.1818–12(e)(4)(i) or (ii) of this section may be used to offset a deficit generated by an averaging set subject to the Temporary Leadtime Allowance Alternative Standards through the 2015 model year, except that manufacturers qualifying under the provisions of § 86.1818–12(e)(3) may use such credits to offset a deficit generated by an averaging set subject to the Temporary Leadtime Allowance Alternative Standards through the 2016 model year.

(C) Credits generated by an averaging set subject to the Temporary Leadtime Allowance Alternative Standards specified in § 86.1818–12(e)(4)(i) or (ii) of this section may not be used to offset a deficit generated by an averaging set subject to the fleet average CO<sub>2</sub> standards specified in § 86.1818–12(c)(2) or (3) or otherwise transferred to an averaging set subject to the fleet average CO<sub>2</sub> standards specified in § 86.1818–12(c)(2) or (3).

(D) Credits generated by vehicles subject to the Temporary Leadtime Allowance Alternative Standards specified in § 86.1818–12(e)(4)(i) or (ii) may be banked for use in a future model year (to offset a deficit generated by an averaging set subject to the Temporary Leadtime Allowance Alternative Standards). All such credits may not be used to demonstrate compliance for model year 2016 and later vehicles, except that manufacturers qualifying under the provisions of § 86.1818–12(e)(3) may use such credits to offset a deficit generated by an averaging set subject to the Temporary Leadtime Allowance Alternative Standards through the 2016 model year.

(E) A manufacturer with any vehicles subject to the Temporary Leadtime Allowance Alternative Standards specified in § 86.1818–12(e)(4)(i) or (ii) of this section in a model year in which that manufacturer also generates credits with vehicles subject to the fleet average CO<sub>2</sub> standards specified in § 86.1818–12(c) may not trade or bank credits earned against the fleet average standards in § 86.1818–12(c) for use in a future model year.

(iv) Credits generated in the 2017 through 2020 model years under the



provisions of § 86.1818–12(e)(3)(ii) may not be traded or otherwise provided to another manufacturer.

(v) Credits generated under any alternative fleet average standards approved under § 86.1818–12(g) may not be traded or otherwise provided to another manufacturer.

(8) The following provisions apply if a manufacturer calculates that it has negative credits (also called “debits” or a “credit deficit”) for a given model year:

(i) The manufacturer may carry the credit deficit forward into the next three model years. Such a carry-forward may only occur after the manufacturer exhausts any supply of banked credits. The deficit must be covered with an appropriate number of credits that the manufacturer generates or purchases by the end of the third model year. Any remaining deficit is subject to a voiding of the certificate *ab initio*, as described in this paragraph (k)(8). Manufacturers are not permitted to have a credit deficit for four consecutive years.

(ii) If the credit deficit is not offset within the specified time period, the number of vehicles not meeting the fleet average CO<sub>2</sub> standards (and therefore not covered by the certificate) must be calculated.

(A) Determine the negative credits for the noncompliant vehicle category by multiplying the total megagram deficit by 1,000,000 and then dividing by the mileage specified in paragraph (k)(4) of this section.

(B) Divide the result by the fleet average standard applicable to the model year in which the debits were first incurred and round to the nearest whole number to determine the number of vehicles not meeting the fleet average CO<sub>2</sub> standards.

(iii) EPA will determine the vehicles not covered by a certificate because the condition on the certificate was not satisfied by designating vehicles in those test groups with the highest carbon-related exhaust emission values first and continuing until reaching a number of vehicles equal to the calculated number of non-complying vehicles as determined in this paragraph (k)(8). The same approach applies for HDV, except that EPA will make these designations by ranking test groups based on CO<sub>2</sub> emission values. If these calculations determines that only a portion of vehicles in a test group contribute to the debit situation, then EPA will designate actual vehicles in that test group as not covered by the certificate, starting with the last vehicle produced and counting backwards.

(iv)(A) If a manufacturer ceases production of passenger automobiles,

light trucks, or heavy-duty vehicles, the manufacturer continues to be responsible for offsetting any debits outstanding within the required time period. Any failure to offset the debits will be considered a violation of paragraph (k)(8)(i) of this section and may subject the manufacturer to an enforcement action for sale of vehicles not covered by a certificate, pursuant to paragraphs (k)(8)(ii) and (iii) of this section.

(B) If a manufacturer is purchased by, merges with, or otherwise combines with another manufacturer, the controlling entity is responsible for offsetting any debits outstanding within the required time period. Any failure to offset the debits will be considered a violation of paragraph (k)(8)(i) of this section and may subject the manufacturer to an enforcement action for sale of vehicles not covered by a certificate, pursuant to paragraphs (k)(8)(ii) and (iii) of this section.

(v) For purposes of calculating the statute of limitations, a violation of the requirements of paragraph (k)(8)(i) of this section, a failure to satisfy the conditions upon which a certificate(s) was issued and hence a sale of vehicles not covered by the certificate, all occur upon the expiration of the deadline for offsetting debits specified in paragraph (k)(8)(i) of this section.

(9) The following provisions apply to CO<sub>2</sub> credit trading:

(i) EPA may reject CO<sub>2</sub> credit trades if the involved manufacturers fail to submit the credit trade notification in the annual report.

(ii) A manufacturer may not sell credits that are no longer valid for demonstrating compliance based on the model years of the subject vehicles, as specified in paragraph (k)(6) of this section.

(iii) In the event of a negative credit balance resulting from a transaction, both the buyer and seller are liable for the credit shortfall. EPA may void *ab initio* the certificates of conformity of all test groups that generate or use credits in such a trade.

(iv) (A) If a manufacturer trades a credit that it has not generated pursuant to paragraph (k) of this section or acquired from another party, the manufacturer will be considered to have generated a debit in the model year that the manufacturer traded the credit. The manufacturer must offset such debits by the deadline for the annual report for that same model year.

(B) Failure to offset the debits within the required time period will be considered a failure to satisfy the conditions upon which the certificate(s) was issued and will be addressed

pursuant to paragraph (k)(8) of this section.

(v) A manufacturer may only trade credits that it has generated pursuant to paragraphs (k)(4) and (5) of this section or acquired from another party.

(1) *Maintenance of records and submittal of information relevant to compliance with fleet average CO<sub>2</sub> standards*—(1) *Maintenance of records.*

(i) Manufacturers producing any light-duty vehicles, light-duty trucks, medium-duty passenger vehicles, or other heavy-duty vehicles subject to the provisions in this subpart must establish, maintain, and retain all the following information in adequately organized records for each model year:

(A) Model year.

(B) Applicable fleet average CO<sub>2</sub> standards for each averaging set as defined in paragraph (i) of this section.

(C) The calculated fleet average CO<sub>2</sub> value for each averaging set as defined in paragraph (i) of this section.

(D) All values used in calculating the fleet average CO<sub>2</sub> values.

(ii) Manufacturers must establish, maintain, and retain all the following information in adequately organized records for each vehicle produced that is subject to the provisions in this subpart:

(A) Model year.

(B) Applicable fleet average CO<sub>2</sub> standard.

(C) EPA test group.

(D) Assembly plant.

(E) Vehicle identification number.

(F) Carbon-related exhaust emission standard (automobile and light truck only), N<sub>2</sub>O emission standard, and CH<sub>4</sub> emission standard to which the vehicle is certified.

(G) In-use carbon-related exhaust emission standard for passenger automobiles and light truck, and in-use CO<sub>2</sub> standard for HDV.

(H) Information on the point of first sale, including the purchaser, city, and state.

(iii) Manufacturers must retain all required records for a period of eight years from the due date for the annual report. Records may be stored in any format and on any media, as long as manufacturers can promptly send EPA organized written records in English if requested by the Administrator. Manufacturers must keep records readily available as EPA may review them at any time.

(iv) The Administrator may require the manufacturer to retain additional records or submit information not specifically required by this section.

(v) Pursuant to a request made by the Administrator, the manufacturer must submit to the Administrator the

information that the manufacturer is required to retain.

(vi) EPA may void ab initio a certificate of conformity for vehicles certified to emission standards as set forth or otherwise referenced in this subpart for which the manufacturer fails to retain the records required in this section or to provide such information to the Administrator upon request, or to submit the reports required in this section in the specified time period.

(2) *Reporting.* (i) Each manufacturer must submit an annual report. The annual report must contain for each applicable CO<sub>2</sub> standard, the calculated fleet average CO<sub>2</sub> value, all values required to calculate the CO<sub>2</sub> emissions value, the number of credits generated or debits incurred, all the values required to calculate the credits or debits, and the resulting balance of credits or debits. For each applicable alternative N<sub>2</sub>O and/or CH<sub>4</sub> standard selected under the provisions of § 86.1818–12(f)(3) for passenger automobiles and light trucks (or § 86.1819–14(c) for HDV), the report must contain the CO<sub>2</sub>-equivalent debits for N<sub>2</sub>O and/or CH<sub>4</sub> calculated according to § 86.1818–12(f)(4) (or § 86.1819–14(c) for HDV) for each test group and all values required to calculate the number of debits incurred.

(ii) For each applicable fleet average CO<sub>2</sub> standard, the annual report must also include documentation on all credit transactions the manufacturer has engaged in since those included in the last report. Information for each transaction must include all of the following:

- (A) Name of credit provider.
- (B) Name of credit recipient.
- (C) Date the trade occurred.
- (D) Quantity of credits traded in megagrams.

(E) Model year in which the credits were earned.

(iii) Manufacturers calculating air conditioning leakage and/or efficiency credits under paragraph § 86.1871–12(b) shall include the following information for each model year and separately for passenger automobiles and light trucks and for each air conditioning system used to generate credits:

(A) A description of the air conditioning system.

(B) The leakage credit value and all the information required to determine this value.

(C) The total credits earned for each averaging set, model year, and region, as applicable.

(iv) Manufacturers calculating advanced technology vehicle credits under paragraph § 86.1871–12(c) shall include the following information for

each model year and separately for passenger automobiles and light trucks:

(A) The number of each model type of eligible vehicle sold.

(B) The cumulative model year production of eligible vehicles starting with the 2009 model year.

(C) The carbon-related exhaust emission value by model type and model year.

(v) Manufacturers calculating off-cycle technology credits under paragraph § 86.1871–12(d) shall include, for each model year and separately for passenger automobiles and light trucks, all test results and data required for calculating such credits.

(vi) Unless a manufacturer reports the data required by this section in the annual production report required under § 86.1844–01(e) or the annual report required under § 600.512–12 of this chapter, a manufacturer must submit an annual report for each model year after production ends for all affected vehicles produced by the manufacturer subject to the provisions of this subpart and no later than May 1 of the calendar year following the given model year. Annual reports must be submitted to: Director, Compliance Division, U.S. Environmental Protection Agency, 2000 Traverwood Dr., Ann Arbor, Michigan 48105.

(vii) Failure by a manufacturer to submit the annual report in the specified time period for all vehicles subject to the provisions in this section is a violation of section 203(a)(1) of the Clean Air Act (42 U.S.C. 7522(a)(1)) for each applicable vehicle produced by that manufacturer.

(viii) If EPA or the manufacturer determines that a reporting error occurred on an annual report previously submitted to EPA, the manufacturer's credit or debit calculations will be recalculated. EPA may void erroneous credits, unless traded, and will adjust erroneous debits. In the case of traded erroneous credits, EPA must adjust the selling manufacturer's credit balance to reflect the sale of such credits and any resulting credit deficit.

(3) *Notice of opportunity for hearing.* Any voiding of the certificate under paragraph (l)(1)(vi) of this section will be made only after EPA has offered the affected manufacturer an opportunity for a hearing conducted in accordance with 40 CFR part 1068, subpart G, and, if a manufacturer requests such a hearing, will be made only after an initial decision by the Presiding Officer.

■ 70. Section 86.1866–12 is amended by adding introductory text and revising paragraph (b) introductory text to read as follows:

**§ 86.1866–12 CO<sub>2</sub> credits for advanced technology vehicles.**

This section describes how to apply CO<sub>2</sub> credits for advanced technology passenger automobiles and light trucks (including MDPV). This section does not apply for heavy-duty vehicles that are not MDPV.

\* \* \* \* \*

(b) For electric vehicles, plug-in hybrid electric vehicles, fuel cell vehicles, dedicated natural gas vehicles, and dual-fuel natural gas vehicles as those terms are defined in § 86.1803–01, that are certified and produced for U.S. sale in the 2017 through 2021 model years and that meet the additional specifications in this section, the manufacturer may use the production multipliers in this paragraph (b) when determining the manufacturer's fleet average carbon-related exhaust emissions under § 600.510–12 of this chapter. Full size pickup trucks eligible for and using a production multiplier are not eligible for the performance-based credits described in § 86.1870–12(b).

\* \* \* \* \*

■ 71. Section 86.1867–12 is amended by revising the introductory text to read as follows:

**§ 86.1867–12 CO<sub>2</sub> credits for reducing leakage of air conditioning refrigerant.**

Manufacturers may generate credits applicable to the CO<sub>2</sub> fleet average program described in § 86.1865–12 by implementing specific air conditioning system technologies designed to reduce air conditioning refrigerant leakage over the useful life of their passenger automobiles and/or light trucks (including MDPV); only the provisions of paragraph (a) this section apply for non-MDPV heavy-duty vehicles. Credits shall be calculated according to this section for each air conditioning system that the manufacturer is using to generate CO<sub>2</sub> credits. Manufacturers may also generate early air conditioning refrigerant leakage credits under this section for the 2009 through 2011 model years according to the provisions of § 86.1871–12(b).

\* \* \* \* \*

■ 72. Section 86.1868–12 is amended by revising the introductory text and paragraphs (e)(5), (f)(1), (g)(1), and (g)(3) introductory text to read as follows:

**§ 86.1868–12 CO<sub>2</sub> credits for improving the efficiency of air conditioning systems.**

Manufacturers may generate credits applicable to the CO<sub>2</sub> fleet average program described in § 86.1865–12 by implementing specific air conditioning system technologies designed to reduce air conditioning-related CO<sub>2</sub> emissions

over the useful life of their passenger automobiles and/or light trucks (including MDPV). The provisions of this section do not apply for non-MDPV heavy-duty vehicles. Credits shall be calculated according to this section for each air conditioning system that the manufacturer is using to generate CO<sub>2</sub> credits. Manufacturers may also generate early air conditioning efficiency credits under this section for the 2009 through 2011 model years according to the provisions of § 86.1871–12(b). For model years 2012 and 2013 the manufacturer may determine air conditioning efficiency credits using the requirements in paragraphs (a) through (d) of this section. For model years 2014 through 2016 the eligibility requirements specified in either paragraph (e) or (f) of this section must be met before an air conditioning system is allowed to generate credits. For model years 2017 through 2019 the eligibility requirements specified in paragraph (f) of this section must be met before an air conditioning system is allowed to generate credits. For model years 2020 and later the eligibility requirements specified in paragraph (g) of this section must be met before an air conditioning system is allowed to generate credits.

\* \* \* \* \*

(e) \* \* \*

(5) Air conditioning systems with compressors that are solely powered by electricity shall submit Air Conditioning Idle Test Procedure data to be eligible to generate credits in the 2014 and later model years, but such systems are not required to meet a specific threshold to be eligible to generate such credits, as long as the engine remains off for a period of at least 2 cumulative minutes during the air conditioning on portion of the Idle Test Procedure in § 86.165–12(d).

(f) \* \* \*

(1) The manufacturer shall perform the AC17 test specified in 40 CFR 1066.845 on each unique air conditioning system design and vehicle platform combination (as those terms are defined in § 86.1803) for which the manufacturer intends to accrue air conditioning efficiency credits. The manufacturer must test at least one unique air conditioning system within each vehicle platform in a model year, unless all unique air conditioning systems within a vehicle platform have been previously tested. A unique air conditioning system design is a system with unique or substantially different component designs or types and/or system control strategies (e.g., fixed displacement vs. variable displacement

compressors, orifice tube vs. thermostatic expansion valve, single vs. dual evaporator, etc.). In the first year of such testing, the tested vehicle configuration shall be the highest production vehicle configuration within each platform. In subsequent model years the manufacturer must test other unique air conditioning systems within the vehicle platform, proceeding from the highest production untested system until all unique air conditioning systems within the platform have been tested, or until the vehicle platform experiences a major redesign. Whenever a new unique air conditioning system is tested, the highest production configuration using that system shall be the vehicle selected for testing. Air conditioning system designs which have similar cooling capacity, component types, and control strategies, yet differ in terms of compressor pulley ratios or condenser or evaporator surface areas will not be considered to be unique system designs. The test results from one unique system design may represent all variants of that design.

Manufacturers must use good engineering judgment to identify the unique air conditioning system designs which will require AC17 testing in subsequent model years. Results must be reported separately for all four phases (two phases with air conditioning off and two phases with air conditioning on) of the test to the Environmental Protection Agency, and the results of the calculations required in 40 CFR 1066.845 must also be reported. In each subsequent model year additional air conditioning system designs, if such systems exist, within a vehicle platform that is generating air conditioning credits must be tested using the AC17 procedure. When all unique air conditioning system designs within a platform have been tested, no additional testing is required within that platform, and credits may be carried over to subsequent model years until there is a significant change in the platform design, at which point a new sequence of testing must be initiated. No more than one vehicle from each credit-generating platform is required to be tested in each model year.

\* \* \* \* \*

(g) \* \* \*

(1) For each air conditioning system (as defined in § 86.1803) selected by the manufacturer to generate air conditioning efficiency credits, the manufacturer shall perform the AC17 Air Conditioning Efficiency Test Procedure specified in 40 CFR 1066.845,

according to the requirements of this paragraph (g).

\* \* \* \* \*

(3) For the first model year for which an air conditioning system is expected to generate credits, the manufacturer must select for testing the projected highest-selling configuration within each combination of vehicle platform and air conditioning system (as those terms are defined in § 86.1803). The manufacturer must test at least one unique air conditioning system within each vehicle platform in a model year, unless all unique air conditioning systems within a vehicle platform have been previously tested. A unique air conditioning system design is a system with unique or substantially different component designs or types and/or system control strategies (e.g., fixed-displacement vs. variable displacement compressors, orifice tube vs. thermostatic expansion valve, single vs. dual evaporator, etc.). In the first year of such testing, the tested vehicle configuration shall be the highest production vehicle configuration within each platform.

In subsequent model years the manufacturer must test other unique air conditioning systems within the vehicle platform, proceeding from the highest production untested system until all unique air conditioning systems within the platform have been tested, or until the vehicle platform experiences a major redesign. Whenever a new unique air conditioning system is tested, the highest production configuration using that system shall be the vehicle selected for testing. Credits may continue to be generated by the air conditioning system installed in a vehicle platform provided that:

\* \* \* \* \*

■ 73. Section 86.1869–12 is amended by adding introductory text and revising paragraphs (b)(2) introductory text, (b)(4)(ii), and (f) to read as follows:

**§ 86.1869–12 CO<sub>2</sub> credits for off-cycle CO<sub>2</sub>-reducing technologies.**

This section describes how manufacturers may generate credits for off-cycle CO<sub>2</sub>-reducing technologies. The provisions of this section do not apply for non-MDPV heavy-duty vehicles, except that § 86.1819–14(d)(13) describes how to apply paragraphs (c) and (d) this section for those vehicles.

\* \* \* \* \*

(b) \* \* \*

(2) The maximum allowable decrease in the manufacturer's combined passenger automobile and light truck fleet average CO<sub>2</sub> emissions attributable

to use of the default credit values in paragraph (b)(1) of this section is 10 grams per mile. If the total of the CO<sub>2</sub> g/mi credit values from paragraph (b)(1) of this section does not exceed 10 g/mi for any passenger automobile or light truck in a manufacturer's fleet, then the total off-cycle credits may be calculated according to paragraph (f) of this section. If the total of the CO<sub>2</sub> g/mi credit values from paragraph (b)(1) of this section exceeds 10 g/mi for any passenger automobile or light truck in a manufacturer's fleet, then the gram per mile decrease for the combined passenger automobile and light truck fleet must be determined according to paragraph (b)(2)(i) of this section to determine whether the 10 g/mi limitation has been exceeded.

\* \* \* \* \*

(4) \* \* \*

(ii) *High efficiency exterior lighting* means a lighting technology that, when installed on the vehicle, is expected to reduce the total electrical demand of the exterior lighting system when compared to conventional lighting systems. To be eligible for this credit, the high efficiency lighting must be installed in one or more of the following lighting components: Low beam, high beam, parking/position, front and rear turn signals, front and rear side markers, taillights, and/or license plate lighting.

\* \* \* \* \*

(f) *Calculation of total off-cycle credits.* Total off-cycle credits in Megagrams of CO<sub>2</sub> (rounded to the nearest whole number) shall be calculated separately for passenger automobiles and light trucks according to the following formula:

$$\text{Total Credits (Megagrams)} = (\text{Credit} \times \text{Production} \times \text{VLM}) \div 1,000,000$$

Where:

Credit = the credit value in grams per mile determined in paragraph (b), (c) or (d) of this section.

Production = The total number of passenger automobiles or light trucks, whichever is applicable, produced with the off-cycle technology to which the credit value determined in paragraph (b), (c), or (d) of this section applies.

VLM = vehicle lifetime miles, which for passenger automobiles shall be 195,264 and for light trucks shall be 225,865.

■ 74. Section 86.1870–12 is amended by revising the section heading, introductory text, and paragraph (a) introductory text and adding paragraph (a)(3) to read as follows:

**§ 86.1870–12 CO<sub>2</sub> credits for qualifying full-size light pickup trucks.**

Full-size pickup trucks may be eligible for additional credits based on the implementation of hybrid

technologies or on exhaust emission performance, as described in this section. Credits may be generated under either paragraph (a) or (b) of this section for a qualifying pickup truck, but not both. The provisions of this section do not apply for heavy-duty vehicles.

(a) *Credits for implementation of hybrid electric technology.* Full size pickup trucks that implement hybrid electric technologies may be eligible for an additional credit under this paragraph (a). Pickup trucks earning the credits under this paragraph (a) may not earn the credits described in paragraph (b) of this section. To claim this credit, the manufacturer must measure the recovered energy over the Federal Test Procedure according to 40 CFR 600.116–12(d) to determine whether a vehicle is a mild or strong hybrid electric vehicle. To provide for EPA testing, the vehicle must be able to broadcast battery pack voltage via an on-board diagnostics parameter ID channel.

\* \* \* \* \*

(3) If you produce both mild and strong hybrid electric full size pickup trucks but do not qualify for credits under paragraph (a)(1) or (2) of this section, your hybrid electric full size pickup trucks may be eligible for a credit of 10 grams/mile. To receive this credit in a given model year, you must produce a quantity of hybrid electric full size pickup trucks such that the proportion of combined mild and strong full size hybrid electric pickup trucks produced in a model year, when compared to your total production of full size pickup trucks, is not less than the required minimum percentages specified in paragraph (a)(1) of this section.

\* \* \* \* \*

■ 75. Section 86.1871–12 is amended by revising the introductory text and paragraphs (a) introductory text, (b)(1), and (d) to read as follows:

**§ 86.1871–12 Optional early CO<sub>2</sub> credit programs.**

Manufacturers may optionally generate CO<sub>2</sub> credits in the 2009 through 2011 model years for use in the 2012 and later model years subject to EPA approval and to the provisions of this section. The provisions of § 86.1819–14(j)(1) apply instead of the provisions of this section for non-MDPV heavy-duty vehicles. Manufacturers may generate early fleet average credits, air conditioning leakage credits, air conditioning efficiency credits, early advanced technology credits, and early off-cycle technology credits.

Manufacturers generating any credits under this section must submit an early credits report to the Administrator as

required in this section. The terms “sales” and “sold” as used in this section shall mean vehicles produced for U.S. sale, where “U.S.” means the states and territories of the United States. The expiration date of unused CO<sub>2</sub> credits is based on the model year in which the credits are earned, as described in § 86.1865–12(k)(6).

(a) *Early fleet average CO<sub>2</sub> reduction credits.* Manufacturers may optionally generate credits for reductions in their fleet average CO<sub>2</sub> emissions achieved in the 2009 through 2011 model years. To generate early fleet average CO<sub>2</sub> reduction credits, manufacturers must select one of the four pathways described in paragraphs (a)(1) through (4) of this section. The manufacturer may select only one pathway, and that pathway must remain in effect for the 2009 through 2011 model years. Fleet average credits (or debits) must be calculated and reported to EPA for each model year under each selected pathway.

\* \* \* \* \*

(b) *Early air conditioning leakage and efficiency credits.* (1) Manufacturers may optionally generate air conditioning refrigerant leakage credits according to the provisions of § 86.1867 and/or air conditioning efficiency credits according to the provisions of § 86.1868 in model years 2009 through 2011. Credits must be tracked by model type and model year.

\* \* \* \* \*

(d) *Early off-cycle technology credits.* Manufacturers may optionally generate credits for the implementation of certain CO<sub>2</sub>-reducing technologies according to the provisions of § 86.1869 in model years 2009 through 2011. Credits must be tracked by model type and model year.

\* \* \* \* \*

**Subpart T—Manufacturer-Run In-Use Testing Program for Heavy-Duty Diesel Engines**

■ 76. Section 86.1910 is amended by revising paragraph (i) to read as follows:

**§ 86.1910 How must I prepare and test my in-use engines?**

\* \* \* \* \*

(i) You may count a vehicle as meeting the vehicle-pass criteria described in § 86.1912 if a shift day of testing or two-shift days of testing (with the requisite non-idle/idle operation time as in paragraph (g) of this section), or if the extended testing you elected under paragraph (h) of this section does not generate a single valid NTE sampling event, as described in § 86.1912(b). Count the vehicle towards

meeting your testing requirements under this subpart.

\* \* \* \* \*

■ 77. Section 86.1912 is revised to read as follows:

**§ 86.1912 How do I determine whether an engine meets the vehicle-pass criteria?**

In general, the average emissions for each regulated pollutant must remain at or below the NTE threshold in paragraph (a) of this section for at least 90 percent of the valid NTE sampling events, as defined in paragraph (b) of this section. For 2007 through 2009 model year engines, the average emissions from every NTE sampling event must also remain below the NTE thresholds in paragraph (g)(2) of this section. Perform the following steps to determine whether an engine meets the vehicle-pass criteria:

(a) Determine the NTE threshold for each pollutant subject to an NTE standard by adding all three of the following terms and rounding the result to the same number of decimal places as the applicable NTE standard:

- (1) The applicable NTE standard.
- (2) The in-use compliance testing margin specified in § 86.007–11(h), if any.
- (3) An accuracy margin for portable in-use equipment when testing is performed under the special provisions of § 86.1930, depending on the pollutant, as follows:
  - (i) NMHC: 0.17 g/hp-hr.
  - (ii) CO: 0.60 g/hp-hr.
  - (iii) NO<sub>x</sub>: 0.50 g/hp-hr.
  - (iv) PM: 0.10 g/hp-hr.
  - (v) NO<sub>x</sub> + NMHC: 0.67 g/hp-hr.
- (4) Accuracy margins for portable in-use equipment when testing is not performed under the special provisions of § 86.1930 for 2007 through 2009 model year engine families that are selected for testing in any calendar year as follows:

(i) NMHC using the emission calculation method specified in 40 CFR 1065.650(a)(1): 0.02 g/hp-hr.

(ii) NMHC using the emission calculation method specified in 40 CFR 1065.650(a)(3): 0.01 g/hp-hr.

(iii) NMHC using an alternative emission calculation method we approve under 40 CFR

1065.915(d)(5)(iv): 0.01 g/hp-hr.

(iv) CO using the emission calculation method specified in 40 CFR 1065.650(a)(1): 0.5 g/hp-hr.

(v) CO using the emission calculation method specified in 40 CFR 1065.650(a)(3): 0.25 g/hp-hr.

(vi) CO using an alternative emission calculation method we approve under 40 CFR 1065.915(d)(5)(iv): 0.25 g/hp-hr.

(vii) NO<sub>x</sub> using the emission calculation method specified in 40 CFR 1065.650(a)(1): 0.45 g/hp-hr.

(viii) NO<sub>x</sub> using the emission calculation method specified in 40 CFR 1065.650(a)(3): 0.15 g/hp-hr.

(ix) NO<sub>x</sub> using an alternative emission calculation method we approve under 40 CFR 1065.915(d)(5)(iv): 0.15 g/hp-hr.

(x) NO<sub>x</sub> + NMHC using the emission calculation method specified in 40 CFR 1065.650(a)(1): 0.47 g/hp-hr.

(xi) NO<sub>x</sub> + NMHC using the emission calculation method specified in 40 CFR 1065.650(a)(3): 0.16 g/hp-hr.

(xii) NO<sub>x</sub> + NMHC using an alternative emission calculation method we approve under 40 CFR 1065.915(d)(5)(iv): 0.16 g/hp-hr.

(xiii) PM: 0.006 g/hp-hr.

(5) Accuracy margins for portable in-use equipment when testing is not performed under the special provisions of § 86.1930 for 2010 or later model year engines families that are selected for testing in any calendar year as follows:

(i) NMHC using any emission calculation method specified in 40 CFR 1065.650(a) or an alternative emission calculation method we approve under 40 CFR 1065.915(d)(5)(iv): 0.01 g/hp-hr.

(ii) CO using any emission calculation method specified in 40 CFR 1065.650(a) or an alternative emission calculation method we approve under 40 CFR 1065.915(d)(5)(iv): 0.25 g/hp-hr.

(iii) NO<sub>x</sub> using any emission calculation method specified in 40 CFR 1065.650(a) or an alternative emission calculation method we approve under 40 CFR 1065.915(d)(5)(iv): 0.15 g/hp-hr.

(iv) PM: 0.006 g/hp-hr.

(b) For the purposes of this subpart, a valid NTE sampling event consists of at least 30 seconds of continuous operation in the NTE control area. An NTE event begins when the engine starts to operate in the NTE control area and continues as long as engine operation remains in this area (see § 86.1370). When determining a valid NTE sampling event, exclude all engine operation in approved NTE limited testing regions under § 86.1370–2007(b)(6) and any approved NTE deficiencies under § 86.007–11(a)(4)(iv). Engine operation in the NTE control area of less than 30 contiguous seconds does not count as a valid NTE sampling event; operating periods of less than 30 seconds in the NTE control area, but outside of any allowed deficiency area or limited testing region, will not be

added together to make a 30 second or longer event. Exclude any portion of a sampling event that would otherwise exceed the 5.0 percent limit for the time-weighted carve-out defined in § 86.1370–2007(b)(7). For EGR-equipped engines, exclude any operation that occurs during the cold-temperature operation defined by the equations in § 86.1370–2007(f)(1).

(c) Calculate the average emission level for each pollutant over each valid NTE sampling event as specified in 40 CFR part 1065, subpart G, using each NTE event as an individual test interval. This should include valid NTE events from all days of testing.

(d) If the engine has an open crankcase, account for these emissions by adding 0.00042 g/hp-hr to the PM emission result for every NTE event.

(e) Calculate a time-weighted vehicle-pass ratio ( $R_{\text{pass}}$ ) for each pollutant. To do this, first sum the time from each valid NTE sampling event whose average emission level is at or below the NTE threshold for that pollutant, then divide this value by the sum of the engine operating time from all valid NTE events for that pollutant. Round the resulting vehicle-pass ratio to two decimal places.

(1) Calculate the time-weighted vehicle-pass ratio for each pollutant as follows:

$$R_{\text{pass}} = \frac{\sum_{m=1}^{n_{\text{pass}}} t}{\sum_{k=1}^{n_{\text{total}}} t}$$

Where:

$n_{\text{pass}}$  = the number of valid sampling events for which the average emission level is at or below the NTE threshold.

$n_{\text{total}}$  = the total number of valid NTE sampling events.

(2) For both the numerator and the denominator of the vehicle-pass ratio, use the smallest of the following values for determining the duration,  $t$ , of any NTE sampling event:

(i) The measured time in the NTE zone that is valid for an NTE sampling event.

(ii) 600 seconds.

(iii) 10 times the length of the shortest valid NTE sampling event for all testing with that engine.

(f) The following example illustrates how to select the duration of NTE sampling events for calculations, as described in paragraph (f) of this section:

NTE sample	Duration of NTE sample (seconds)	Duration limit applied?	Duration used in calculations (seconds)
1 .....	45	No .....	45
2 .....	168	No .....	168
3 .....	605	Yes. Use 10 times shortest valid NTE .....	450
4 .....	490	Yes. Use 10 times shortest valid NTE .....	450
5 .....	65	No .....	65

(g) Engines meet the vehicle-pass criteria under this section if they meet both of the following criteria:

(1) The vehicle-pass ratio calculated according to paragraph (e) of this section must be at least 0.90 for each pollutant.

(2) For model year 2007 through 2009 engines, emission levels from every valid NTE sampling event must be less than 2.0 times the NTE thresholds calculated according to paragraph (a) of this section for all pollutants, except that engines certified to a NO<sub>x</sub> FEL at or below 0.50 g/hp-hr may meet the vehicle-pass criteria for NO<sub>x</sub> if measured NO<sub>x</sub> emissions from every valid NTE sample are less than either 2.0 times the NTE threshold for NO<sub>x</sub> or 2.0 g/hp-hr, whichever is greater.

■ 78. Section 86.1920 is amended by revising paragraph (b) introductory text to read as follows:

**§ 86.1920 What in-use testing information must I report to EPA?**

\* \* \* \* \*

(b) Within 45 days after the end of each calendar quarter, send us reports containing the test data from each engine for which testing was completed during the calendar quarter. Alternatively, you may separately send us the test data within 30 days after you complete testing for an engine. If you request it, we may allow additional time to send us this information. Once you send us information under this section, you need not send that information again in later reports. Prepare your test reports as follows:

\* \* \* \* \*

**Appendix I to Part 86—[Amended]**

■ 79. Appendix I to part 86 is amended by removing paragraph (f)(3).

**PART 600—FUEL ECONOMY AND GREENHOUSE GAS EXHAUST EMISSIONS OF MOTOR VEHICLES**

■ 80. The authority citation for part 600 continues to read as follows:

**Authority:** 49 U.S.C. 32901–23919q, Pub. L. 109–58.

**Subpart A—General Provisions**

■ 81. Section 600.002 is amended by revising the definitions for “Engine code”, “Subconfiguration”, “Transmission class”, and “Vehicle configuration” to read as follows:

**§ 600.002 Definitions.**

\* \* \* \* \*

*Engine code* means one of the following:

(1) For LDV, LDT, and MDPV, *engine code* means a unique combination, within an engine-system combination (as defined in § 86.1803 of this chapter), of displacement, fuel injection (or carburetion or other fuel delivery system), calibration, distributor calibration, choke calibration, auxiliary emission control devices, and other engine and emission control system components specified by the Administrator. For electric vehicles, engine code means a unique combination of manufacturer, electric traction motor, motor configuration, motor controller, and energy storage device.

(2) For HDV, *engine code* has the meaning given in § 86.1819–14(d)(12).

\* \* \* \* \*

*Subconfiguration* means one of the following:

(1) For LDV, LDT, and MDPV, *subconfiguration* means a unique combination within a vehicle configuration of equivalent test weight, road-load horsepower, and any other operational characteristics or parameters which the Administrator determines may significantly affect fuel economy or CO<sub>2</sub> emissions within a vehicle configuration.

(2) For HDV, *subconfiguration* has the meaning given in § 86.1819–14(d)(12).

\* \* \* \* \*

*Transmission class* means a group of transmissions having the following

common features: Basic transmission type (e.g., automatic, manual, automated manual, semi-automatic, or continuously variable); number of forward gears used in fuel economy testing (e.g., manual four-speed, three-speed automatic, two-speed semi-automatic); drive system (e.g., front wheel drive, rear wheel drive, four wheel drive), type of overdrive, if applicable (e.g., final gear ratio less than 1.00, separate overdrive unit); torque converter type, if applicable (e.g., non-lockup, lockup, variable ratio); and other transmission characteristics that may be determined to be significant by the Administrator.

\* \* \* \* \*

*Vehicle configuration* means one of the following:

(1) For LDV, LDT, and MDPV, *vehicle configuration* means a unique combination of basic engine, engine code, inertia weight class, transmission configuration, and axle ratio within a base level.

(2) For HDV, *vehicle configuration* has the meaning given for “configuration” in § 86.1819–14(d)(12).

**Subpart B—Fuel Economy and Carbon-Related Exhaust Emission Test Procedures**

■ 82. Section 600.113–12 is amended by revising paragraphs (m), (n) introductory text, (n)(2), and (n)(3) and adding paragraph (o) to read as follows:

**§ 600.113–12 Fuel economy, CO<sub>2</sub> emissions, and carbon-related exhaust emission calculations for FTP, HFET, US06, SC03 and cold temperature FTP tests.**

\* \* \* \* \*

(m)(1) For automobiles fueled with liquefied petroleum gas and automobiles designed to operate on gasoline and liquefied petroleum gas, the fuel economy in miles per gallon of liquefied petroleum gas is to be calculated using the following equation:

$$mpg_e = \frac{(CWF_{fuel} \times SG_{fuel} \times 3781.8)}{((CWF_{HC} \times HC) + (0.429 \times CO) + (0.273 \times CO_2))}$$

Where:

mpg<sub>c</sub> = miles per gasoline gallon equivalent of liquefied petroleum gas.

CWF<sub>fuel</sub> = carbon weight fraction based on the hydrocarbon constituents in the liquefied petroleum gas fuel as obtained in paragraph (f)(5) of this section and rounded according to paragraph (g)(3) of this section.

SG = Specific gravity of the fuel as determined in paragraph (f)(5) of this section and rounded according to paragraph (g)(3) of this section.

3781.8 = Grams of H<sub>2</sub>O per gallon conversion factor.

CWF<sub>HC</sub> = Carbon weight fraction of exhaust hydrocarbon = CWF<sub>fuel</sub> as determined in paragraph (f)(4) of this section and rounded according to paragraph (f)(3) of this section.

HC = Grams/mile HC as obtained in paragraph (g)(2) of this section.

CO = Grams/mile CO as obtained in paragraph (g)(2) of this section.

CO<sub>2</sub> = Grams/mile CO<sub>2</sub> as obtained in paragraph (g)(2) of this section.

(2)(i) For automobiles fueled with liquefied petroleum gas and automobiles designed to operate on gasoline and liquefied petroleum gas, the carbon-related exhaust emissions in grams per mile while operating on liquefied petroleum gas is to be calculated for 2012 and later model year vehicles using the following equation and rounded to the nearest 1 gram per mile:

$$\text{CREE} = (\text{CWF}_{\text{HC}}/0.273 \times \text{HC}) + (1.571 \times \text{CO}) + \text{CO}_2$$

Where:

CREE means the carbon-related exhaust emission value as defined in § 600.002.

CWF<sub>HC</sub> = Carbon weight fraction of exhaust hydrocarbon = CWF<sub>fuel</sub> as determined in paragraph (f)(5) of this section and rounded according to paragraph (g)(3) of this section.

HC = Grams/mile HC as obtained in paragraph (g)(2) of this section.

CO = Grams/mile CO as obtained in paragraph (g)(2) of this section.

CO<sub>2</sub> = Grams/mile CO<sub>2</sub> as obtained in paragraph (g)(2) of this section.

(ii) For manufacturers complying with the fleet averaging option for N<sub>2</sub>O and CH<sub>4</sub> as allowed under § 86.1818 of this chapter, the carbon-related exhaust emissions in grams per mile for 2012 and later model year automobiles fueled with liquefied petroleum gas and automobiles designed to operate on mixtures of gasoline and liquefied petroleum gas while operating on liquefied petroleum gas is to be calculated using the following equation and rounded to the nearest 1 gram per mile:

$$\text{CREE} = [(\text{CWF}_{\text{exHC}}/0.273) \times \text{NMHC}] + (1.571 \times \text{CO}) + \text{CO}_2 + (298 \times \text{N}_2\text{O}) + (25 \times \text{CH}_4)$$

Where:

CREE means the carbon-related exhaust emission value as defined in § 600.002.

CWF<sub>HC</sub> = Carbon weight fraction of exhaust hydrocarbon = CWF<sub>fuel</sub> as determined in paragraph (f)(5) of this section and rounded according to paragraph (g)(3) of this section.

NMHC = Grams/mile HC as obtained in paragraph (g)(2) of this section.

CO = Grams/mile CO as obtained in paragraph (g)(2) of this section.

CO<sub>2</sub> = Grams/mile CO<sub>2</sub> as obtained in paragraph (g)(2) of this section.

N<sub>2</sub>O = Grams/mile N<sub>2</sub>O as obtained in paragraph (g)(2) of this section.

CH<sub>4</sub> = Grams/mile CH<sub>4</sub> as obtained in paragraph (g)(2) of this section.

(n) Manufacturers shall determine CO<sub>2</sub> emissions and carbon-related exhaust emissions for electric vehicles, fuel cell vehicles, and plug-in hybrid electric vehicles according to the provisions of this paragraph (n). Subject to the limitations on the number of vehicles produced and delivered for sale as described in § 86.1866 of this chapter, the manufacturer may be allowed to use a value of 0 grams/mile to represent the emissions of fuel cell vehicles and the proportion of electric operation of a electric vehicles and plug-in hybrid electric vehicles that is derived from electricity that is generated from sources that are not onboard the vehicle, as described in paragraphs (n)(1) through (3) of this section. For purposes of labeling under this part, the CO<sub>2</sub> emissions for electric vehicles shall be 0 grams per mile. Similarly, for purposes of labeling under this part, the CO<sub>2</sub> emissions for plug-in hybrid electric vehicles shall be 0 grams per mile for the proportion of electric operation that is derived from electricity that is generated from sources that are not onboard the vehicle. For manufacturers no longer eligible to use 0 grams per mile to represent electric operation, and for all 2026 and later model year electric vehicles, fuel cell vehicles, and plug-in hybrid electric vehicles, the provisions of this paragraph (n) shall be used to determine the non-zero value for CREE for purposes of meeting the greenhouse gas emission standards described in § 86.1818 of this chapter.

\* \* \* \* \*

(2) For plug-in hybrid electric vehicles the carbon-related exhaust emissions in grams per mile is to be calculated according to the provisions of § 600.116, except that the CREE for charge-depleting operation shall be the sum of the CREE associated with gasoline consumption and the net upstream CREE determined according to paragraph (n)(1) of this section, rounded to the nearest one gram per mile.

(3) For 2012 and later model year fuel cell vehicles, the carbon-related exhaust emissions in grams per mile shall be calculated using the method specified in paragraph (n)(1) of this section, except that CREE<sub>UP</sub> shall be determined according to procedures established by the Administrator under § 600.111–08(f). As described in § 86.1866 of this chapter the value of CREE may be set equal to zero for a certain number of 2012 through 2025 model year fuel cell vehicles.

(o) Equations for fuels other than those specified in this section may be used with advance EPA approval. Alternate calculation methods for fuel economy and carbon-related exhaust emissions may be used in lieu of the methods described in this section if shown to yield equivalent or superior results and if approved in advance by the Administrator.

■ 83. Section 600.116–12 is amended as follows:

■ a. By revising paragraph (c)(1) introductory text.

■ b. By redesignating paragraphs (c)(2) through (9) as paragraphs (c)(3) through (10), respectively.

■ c. By adding a new paragraph (c)(2).

■ d. By revising newly redesignated paragraph (c)(4).

■ e. By revising newly redesignated paragraph (c)(5) introductory text.

■ f. By revising paragraphs (d)(1)(i)(C), (d)(1)(ii), (d)(2)(ii), and (d)(3).

The revisions and addition read as follows:

**§ 600.116–12 Special procedures related to electric vehicles and hybrid electric vehicles.**

\* \* \* \* \*

(c) \* \* \*

(1) To determine CREE values to demonstrate compliance with GHG standards, calculate composite values representing combined operation during charge-depleting and charge-sustaining operation using the following utility factors except as specified in this paragraph (c):

\* \* \* \* \*

(2) Determine fuel economy values to demonstrate compliance with CAFE standards as follows:

(i) For vehicles that do not qualify as dual fueled automobiles under 49 CFR 538.5, determine fuel economy using the utility factors described in paragraph (c)(1) of this section. Do not use the petroleum-equivalence factors described in 10 CFR 474.3.

(ii) For vehicles that qualify as dual fueled automobiles under 49 CFR 538.5, determine fuel economy based on the procedure described in paragraph (c)(2)(i) of this section, or based on the



following equation, separately for city and highway driving:

$$MPGe_{CAFE} = \frac{1}{\left( \frac{0.5}{MPG_{gas}} + \frac{0.5}{MPG_{elec}} \right)}$$

Where:

$MPG_{gas}$  = The miles per gallon measured while operating on gasoline during charge-sustaining operation as determined using the procedures of SAE J1711 (incorporated by reference in § 600.011).

$MPGe_{elec}$  = The miles per gallon equivalent measured while operating on electricity.

Calculate this value by dividing the equivalent all-electric range determined from the equation in § 86.1866–12(b)(2)(ii) by the corresponding measured Watt-hours of energy consumed; apply the appropriate petroleum-equivalence factor from 10 CFR 474.3 to convert Watt-hours to gallons equivalent. Note that if vehicles use no gasoline during charge-depleting operation,  $MPGe_{elec}$  is the same as the charge-depleting fuel economy specified in SAE J1711.

\* \* \* \* \*

(4) You may calculate performance values under paragraphs (c)(1) through (3) of this section by combining phases during FTP testing. For example, you may treat the first 7.45 miles as a single phase by adding the individual utility factors for that portion of driving and assigning emission levels to the combined phase. Do this consistently throughout a test run.

(5) Instead of the utility factors specified in paragraphs (c)(1) through (3) of this section, calculate utility factors using the following equation for vehicles whose maximum speed is less than the maximum speed specified in the driving schedule, where the vehicle's maximum speed is determined, to the nearest 0.1 mph, from observing the highest speed over the first duty cycle (FTP, HFET, etc.):

\* \* \* \* \*

(d) \* \* \*

(1) \* \* \*

(i) \* \* \*

(C) Determine braking power in kilowatts using the following equation. Note that during braking events,  $P_{brake}$ ,  $P_{accel}$ , and  $P_{roadload}$  will all be negative (*i.e.*, resistive) forces on the vehicle.

$$P_{brake} = P_{accel} - P_{roadload}$$

Where:

$P_{accel}$  = the value determined in paragraph (d)(1)(i)(B) of this section;

$P_{roadload}$  = the value determined in paragraph (d)(1)(i)(A) of this section; and

$P_{brake} = 0$  if  $P_{accel}$  is greater than or equal to  $P_{roadload}$ .

(ii) The total maximum braking energy ( $E_{brake}$ ) that could theoretically be recovered is equal to the absolute value of the sum of all the values of  $P_{brake}$  determined in paragraph (d)(1)(i)(C) of this section, divided by 36000 (to convert 10 Hz data to hours) and rounded to the nearest 0.01 kilowatt-hours.

(2) \* \* \*

(ii) At each sampling point where current is flowing into the battery, calculate the energy flowing into the battery, in Watt-hours, as follows:

$$E_t = \frac{I_t \cdot V_{nominal}}{36,000}$$

Where:

$E_t$  = the energy flowing into the battery, in Watt-hours, at time  $t$  in the test;

$I_t$  = the electrical current, in Amps, at time  $t$  in the test; and

$V_{nominal}$  = the nominal voltage of the hybrid battery system determined according to paragraph (d)(4) of this section.

\* \* \* \* \*

(3) The percent of braking energy recovered by a hybrid system relative to the total available energy is determined by the following equation, rounded to the nearest one percent:

$$\text{Energy Recovered \%} = \frac{E_{rec}}{E_{brake}} \cdot 100$$

Where:

$E_{rec}$  = The actual total energy recovered, in kilowatt-hours, as determined in paragraph (d)(2) of this section; and

$E_{brake}$  = The theoretical maximum amount of energy, in kilowatt-hours, that could be recovered by a hybrid electric vehicle over the FTP test cycle, as determined in paragraph (d)(1) of this section.

\* \* \* \* \*

### Subpart C—Procedures for Calculating Fuel Economy and Carbon-Related Exhaust Emission Values

■ 84. Section 600.208–12 is amended by revising paragraph (a)(2)(iii) to read as follows:

**§ 600.208–12 Calculation of FTP-based and HFET-based fuel economy, CO<sub>2</sub> emissions, and carbon-related exhaust emissions for a model type.**

(a) \* \* \*

(2) \* \* \*

(iii) All subconfigurations within the new base level are represented by test data in accordance with § 600.010(c)(1)(iii).

\* \* \* \* \*

■ 85. Section 600.210–12 is amended by revising paragraph (c)(2)(iv)(C) to read as follows:

**§ 600.210–12 Calculation of fuel economy and CO<sub>2</sub> emission values for labeling.**

\* \* \* \* \*

(c) \* \* \*

(2) \* \* \*

(iv) \* \* \*

(C) Calculate a composite city CO<sub>2</sub> emission rate and a composite highway CO<sub>2</sub> emission rate by combining the separate results for battery and engine operation using the procedures described in § 600.116. Use these values to calculate the vehicle's combined CO<sub>2</sub> emissions as described in paragraph (c)(2)(i) of this section.

\* \* \* \* \*

### Subpart F—Procedures for Determining Manufacturer's Average Fuel Economy and Manufacturer's Average Carbon-Related Exhaust Emissions

■ 86. Section 600.510–12 is amended by revising paragraph (h) to read as follows:

**§ 600.510–12 Calculation of average fuel economy and average carbon-related exhaust emissions.**

\* \* \* \* \*

(h) The increase in average fuel economy determined in paragraph (c) of this section attributable to dual fueled automobiles is subject to a maximum value that applies separately to each category of automobile specified in paragraph (a)(1) of this section. The increase in average fuel economy attributable to vehicles fueled by electricity or, for model years 2016 and later, by compressed natural gas, is not subject to a maximum value. The following maximum values apply under this paragraph (h):

Model year	Maximum increase (mpg)
1993–2014 .....	1.2
2015 .....	1.0
2016 .....	0.8
2017 .....	0.6
2018 .....	0.4
2019 .....	0.2
2020 and later .....	0.0

(1) The Administrator shall calculate the increase in average fuel economy to determine if the maximum increase provided in this paragraph (h) has been reached. The Administrator shall calculate the increase in average fuel economy for each category of automobiles specified in paragraph (a)(1) of this section by subtracting the average fuel economy values calculated in accordance with this section, assuming all alcohol dual fuel automobiles are operated exclusively on



gasoline (or diesel fuel), from the average fuel economy values determined in paragraph (c) of this section. The difference is limited to the maximum increase specified in this paragraph (h).

(2) [Reserved]

## PART 1033—CONTROL OF EMISSIONS FROM LOCOMOTIVES

■ 87. The authority citation for part 1033 continues to read as follows:

Authority: 42 U.S.C. 7401–7671q.

### Subpart A—Overview and Applicability

■ 88. Section 1033.1 is amended by revising paragraph (e) to read as follows:

#### § 1033.1 Applicability.

(e) The provisions of this part apply as specified for locomotives manufactured or remanufactured on or after July 7, 2008. See § 1033.102 to determine whether the standards of this part or the standards specified in Appendix I of this part apply for model years 2008 through 2012. For example, for a locomotive that was originally manufactured in 2007 and remanufactured on April 10, 2014, the provisions of this part begin to apply on April 10, 2014.

■ 89. Section 1033.30 is revised to read as follows:

#### § 1033.30 Submission of information.

Unless we specify otherwise, send all reports and requests for approval to the Designated Compliance Officer (see § 1033.901). See § 1033.925 for additional reporting and recordkeeping provisions.

### Subpart B—Emission Standards and Related Requirements

■ 90. Section 1033.101 is amended by revising paragraphs (f)(1)(ii) and (f)(2)(i) and (iii) to read as follows:

#### § 1033.101 Exhaust emission standards.

\* \* \* \* \*

(f) \* \* \*

(1) \* \* \*

(ii) Gaseous-fueled locomotives: NMHC emissions. This includes dual-fuel and flexible-fuel locomotives that use a combination of a gaseous fuel and a nongaseous fuel.

\* \* \* \* \*

(2) \* \* \*

(i) Certify your Tier 4 and later diesel-fueled locomotives for operation with only Ultra Low Sulfur Diesel (ULSD) fuel. Use ULSD as the test fuel for these locomotives. You may alternatively

certify Tier 4 and later locomotives using Low Sulfur Diesel Fuel (LSD).

\* \* \* \* \*

(iii) Certify your Tier 3 and earlier diesel-fueled locomotives for operation with either ULSD fuel or LSD fuel if they do not include sulfur-sensitive technology or if you demonstrate compliance using an LSD test fuel (including commercial LSD fuel).

\* \* \* \* \*

■ 91. Section 1033.102 is revised to read as follows:

#### § 1033.102 Transition to the standards specified in this subpart.

(a) Except as specified in § 1033.150(a), the Tier 0 and Tier 1 standards of § 1033.101 apply for new locomotives beginning January 1, 2010, except as specified in § 1033.150(a). The Tier 0 and Tier 1 standards specified in Appendix I of this part apply for earlier model years.

(b) Except as specified in § 1033.150(a), the Tier 2 standards of § 1033.101 apply for new locomotives beginning January 1, 2013. The Tier 2 standards specified in Appendix I of this part apply for earlier model years.

(c) The Tier 3 and Tier 4 standards of § 1033.101 apply for the model years specified in that section.

■ 92. Section 1033.120 is amended by revising paragraph (b) to read as follows:

#### § 1033.120 Emission-related warranty requirements.

\* \* \* \* \*

(b) *Warranty period.* Except as specified in this paragraph, the minimum warranty period is one-third of the useful life. Your emission-related warranty must be valid for at least as long as the minimum warranty periods listed in this paragraph (b) in MW-hrs of operation (or miles for Tier 0 locomotives not equipped with MW-hr meters) and years, whichever comes first. You may offer an emission-related warranty more generous than we require. The emission-related warranty for the locomotive may not be shorter than any basic mechanical warranty you provide without charge for the locomotive. Similarly, the emission-related warranty for any component may not be shorter than any warranty you provide without charge for that component. This means that your warranty may not treat emission-related and nonemission-related defects differently for any component. If you provide an extended warranty to individual owners for any components covered in paragraph (c) of this section for an additional charge, your emission-related warranty must cover those components for those owners to the

same degree. If the locomotive does not record MW-hrs, we base the warranty periods in this paragraph (b) only on years. The warranty period begins when the locomotive is placed into service, or back into service after remanufacture.

\* \* \* \* \*

■ 93. Section 1033.1135 is amended by revising paragraph (b)(3) to read as follows:

#### § 1033.135 Labeling.

\* \* \* \* \*

(b) \* \* \*

(3) Label diesel-fueled locomotives near the fuel inlet to identify the allowable fuels, consistent with § 1033.101. For example, Tier 4 locomotives with sulfur sensitive technology (or that otherwise require ULSD for compliance) should be labeled “ULTRA LOW SULFUR DIESEL FUEL ONLY”. You do not need to label Tier 3 and earlier locomotives certified for use with both LSD and ULSD.

\* \* \* \* \*

### Subpart C—Certifying Engine Families

■ 94. Section 1033.201 is amended by revising paragraphs (a) and (g) to read as follows:

#### § 1033.201 General requirements for obtaining a certificate of conformity.

\* \* \* \* \*

(a) You must send us a separate application for a certificate of conformity for each engine family. A certificate of conformity is valid for new production from the indicated effective date, until the end of the model year for which it is issued, which may not extend beyond December 31 of that year. No certificate will be issued after December 31 of the model year. You may amend your application for certification after the end of the model year in certain circumstances as described in §§ 1033.220 and 1033.225. You must renew your certification annually for any locomotives you continue to produce.

\* \* \* \* \*

(g) We may require you to deliver your test locomotives (including test engines, as applicable) to a facility we designate for our testing (see § 1033.235(c)). Alternatively, you may choose to deliver another engine/locomotive that is identical in all material respects to the test locomotive, or another engine/locomotive that we determine can appropriately serve as an emission-data locomotive for the engine family.

\* \* \* \* \*

■ 95. Section 1033.225 is amended by revising the introductory text and

adding paragraph (b)(4) to read as follows:

**§ 1033.225 Amending applications for certification.**

Before we issue you a certificate of conformity, you may amend your application to include new or modified locomotive configurations, subject to the provisions of this section. After we have issued your certificate of conformity, but before the end of the model year, you may send us an amended application requesting that we include new or modified locomotive configurations within the scope of the certificate, subject to the provisions of this section. Before the end of the model year, you must also amend your application if any changes occur with respect to any information that is included or should be included in your application. For example, you must amend your application if you determine that your actual production variation for an adjustable parameter exceeds the tolerances specified in your application. After the end of the model year, you may amend your application only to update maintenance instructions as described in § 1033.220 or to modify an FEL as described in paragraph (f) of this section.

\* \* \* \* \*

(b) \* \* \*

(4) Include any other information needed to make your application correct and complete.

\* \* \* \* \*

■ 96. Section 1033.235 is amended by revising paragraphs (b), (c)(4), and (d)(1) to read as follows:

**§ 1033.235 Emission testing required for certification.**

\* \* \* \* \*

(b) Test your emission-data locomotives using the procedures and equipment specified in subpart F of this part. In the case of dual-fuel locomotives, measure emissions when operating with each type of fuel for which you intend to certify the locomotive. In the case of flexible-fuel locomotives, measure emissions when operating with the fuel mixture that best represents in-use operation or is most likely to have the highest NO<sub>x</sub> emissions, though you may ask us instead to perform tests with both fuels separately if you can show that intermediate mixtures are not likely to occur in use.

(c) \* \* \*

(4) Before we test one of your locomotives, we may calibrate it within normal production tolerances for anything we do not consider an adjustable parameter. For example, this

would apply for a parameter that is subject to production variability because it is adjustable during production, but is not considered an adjustable parameter (as defined in § 1033.901) because it is permanently sealed.

(d) \* \* \*

(1) The engine family from the previous model year differs from the current engine family only with respect to model year, items identified in § 1033.225(a), or other factors not related to emissions. We may waive this criterion for differences we determine not to be relevant.

\* \* \* \* \*

■ 97. Section 1033.245 is amended by revising the introductory text and paragraph (b) introductory text and adding paragraphs (b)(3) through (5) to read as follows:

**§ 1033.245 Deterioration factors.**

Establish deterioration factors for each pollutant to determine whether your locomotives will meet emission standards for each pollutant throughout the useful life, as described in § 1033.240. Determine deterioration factors as described in this section, either with an engineering analysis, with pre-existing test data, or with new emission measurements. The deterioration factors are intended to reflect the deterioration expected to result during the useful life of a locomotive maintained as specified in § 1033.125. If you perform durability testing, the maintenance that you may perform on your emission-data locomotive is limited to the maintenance described in § 1033.125. You may carry across a deterioration factor from one engine family to another consistent with good engineering judgment.

\* \* \* \* \*

(b) Apply deterioration factors as follows:

\* \* \* \* \*

(3) *Sawtooth deterioration patterns.* The deterioration factors described in paragraphs (b)(1) and (2) of this section assume that the highest useful life emissions occur either at the end of useful life or at the low-hour test point. The provisions of this paragraph (b)(3) apply where good engineering judgment indicates that the highest emissions over the useful life will occur between these two points. For example, emissions may increase with service accumulation until a certain maintenance step is performed, then return to the low-hour emission levels and begin increasing again. Base deterioration factors for locomotives with such emission patterns on the difference between (or

ratio of) the point of the sawtooth at which the highest emissions occur and the low-hour test point. Note that this applies for maintenance-related deterioration only where we allow such critical emission-related maintenance.

(4) *Dual-fuel and flexible-fuel engines.* In the case of dual-fuel and flexible-fuel locomotives, apply deterioration factors separately for each fuel type by measuring emissions with each fuel type at each test point. You may accumulate service hours on a single emission-data engine using the type of fuel or the fuel mixture expected to have the highest combustion and exhaust temperatures; you may ask us to approve a different fuel mixture if you demonstrate that a different criterion is more appropriate.

(5) *Deterioration factor for crankcase emissions.* If your engine vents crankcase emissions to the exhaust or to the atmosphere, you must account for crankcase emission deterioration, using good engineering judgment. You may use separate deterioration factors for crankcase emissions of each pollutant (either multiplicative or additive) or include the effects in combined deterioration factors that include exhaust and crankcase emissions together for each pollutant.

\* \* \* \* \*

■ 98. Section 1033.250 is amended by revising paragraphs (b)(3)(iv) and (c) to read as follows:

**§ 1033.250 Reporting and recordkeeping.**

\* \* \* \* \*

(b) \* \* \*

(3) \* \* \*

(iv) All your emission tests (valid and invalid), including the date and purpose of each test and documentation of test parameters as specified in part 40 CFR part 1065, and the date and purpose of each test.

\* \* \* \* \*

(c) Keep required data from emission tests and all other information specified in this section for eight years after we issue your certificate. If you use the same emission data or other information for a later model year, the eight-year period restarts with each year that you continue to rely on the information.

\* \* \* \* \*

■ 99. Section 1033.255 is amended by revising paragraphs (c)(2), (c)(4), (d), and (e) to read as follows:

**§ 1033.255 EPA decisions.**

\* \* \* \* \*

(c) \* \* \*

(2) Submit false or incomplete information (paragraph (e) of this section applies if this is fraudulent).

This includes doing anything after submission of your application to render any of the submitted information false or incomplete.

\* \* \* \* \*

(4) Deny us from completing authorized activities (see 40 CFR 1068.20). This includes a failure to provide reasonable assistance.

\* \* \* \* \*

(d) We may void the certificate of conformity for an engine family if you fail to keep records, send reports, or give us information as required under this part or the Act. Note that these are also violations of 40 CFR 1068.101(a)(2).

(e) We may void your certificate if we find that you intentionally submitted false or incomplete information. This includes rendering submitted information false or incomplete after submission.

\* \* \* \* \*

## Subpart F—Test Procedures

■ 100. Section 1033.501 is amended by revising paragraph (a)(3) and adding paragraphs (a)(4), (a)(5), and (j) to read as follows:

### § 1033.501 General provisions.

(a) \* \* \*

(3) The following provisions apply for engine mapping, duty cycle generation, and cycle validation to account for the fact that locomotive operation and locomotive duty cycles are based on operator demand from locomotive notch settings, not on target values for engine speed and load:

(i) The provisions related to engine mapping, duty cycle generation, and cycle validation in 40 CFR 1065.510, 1065.512, and 1065.514 do not apply for testing complete locomotives.

(ii) The provisions related to engine mapping and duty cycle generation in 40 CFR 1065.510 and 1065.512 are not required for testing with an engine dynamometer; however, the cycle validation criteria of 40 CFR 1065.514 apply for such testing. Demonstrate compliance with cycle validation criteria based on manufacturer-declared values for maximum torque, maximum power, and maximum test speed, or determine these values from an engine map generated according to 40 CFR 1065.510. If you test using a ramped-modal cycle, you may perform cycle validation over all the test intervals together.

(4) If you perform discrete-mode testing and use only one batch fuel measurement to determine your mean raw exhaust flow rate, you must target a constant sample flow rate over the mode. Verify proportional sampling as

described in 40 CFR 1065.545 using the mean raw exhaust molar flow rate paired with each recorded sample flow rate.

(5) If you perform discrete-mode testing by grouping the modes in the same manner as the test intervals of the ramped modal cycle using three different dilution settings for the groups, as allowed in § 1033.515(c)(5)(ii), you may verify proportional sampling over each phase instead of each discrete mode.

\* \* \* \* \*

(j) The following provisions apply for locomotives using aftertreatment technology with infrequent regeneration events that may occur during testing:

(1) Adjust measured emissions to account for aftertreatment technology with infrequent regeneration as described in § 1033.535.

(2) Invalidate a smoke test if active regeneration starts to occur during the test.

■ 101. Section 1033.515 is amended by revising paragraphs (c)(2)(ii) and (c)(5)(ii) to read as follows:

### § 1033.515 Discrete-mode steady-state emission tests of locomotives and locomotive engines.

\* \* \* \* \*

(c) \* \* \*

(2) \* \* \*

(ii) The sample period is 300 seconds for all test modes except mode 8. The sample period for test mode 8 is 600 seconds.

\* \* \* \* \*

(5) \* \* \*

(ii) Group the modes in the same manner as the test intervals of the ramped modal cycle and use three different dilution settings for the groups. Use one setting for both idle modes, one for dynamic brake through Notch 5, and one for Notch 6 through Notch 8. For each group, ensure that the mode with the highest exhaust flow (typically normal idle, Notch 5, and Notch 8) meets the criteria for minimum dilution ratio in 40 CFR part 1065.

\* \* \* \* \*

■ 102. Section 1033.520 is revised to read as follows:

### § 1033.520 Alternative ramped modal cycles.

(a) Locomotive testing over a ramped modal cycle is intended to improve measurement accuracy at low emission levels by allowing the use of batch sampling of PM and gaseous emissions over multiple locomotive notch settings. Ramped modal cycles combine multiple test modes of a discrete-mode steady-state into a single sample period. Time in notch is varied to be proportional to

weighting factors. The ramped modal cycle for line-haul locomotives is shown in Table 1 to this section. The ramped modal cycle for switch locomotives is shown in Table 2 to this section. Both ramped modal cycles consist of a warm-up followed by three test intervals that are each weighted in a manner that maintains the duty cycle weighting of the line-haul and switch locomotive duty cycles in § 1033.530. You may use ramped modal cycle testing for any locomotives certified under this part.

(b) Ramped modal testing requires continuous gaseous analyzers and three separate PM filters (one for each test interval). You may collect a single batch sample for each test interval, but you must also measure gaseous emissions continuously to allow calculation of notch caps as required under § 1033.101.

(c) You may operate the engine in any way you choose to warm it up. Then follow the provisions of 40 CFR part 1065, subpart F for general pre-test procedures (including engine and sampling system pre-conditioning).

(d) Begin the test by operating the locomotive over the pre-test portion of the cycle. For locomotives not equipped with catalysts, you may begin the test as soon as the engine reaches its lowest idle setting. For catalyst-equipped locomotives, you may begin the test in normal idle mode if the engine does not reach its lowest idle setting within 15 minutes. If you do start in normal idle, run the low idle mode after normal idle, then resume the specified mode sequence (without repeating the normal idle mode).

(e) Start the test according to 40 CFR 1065.530.

(1) Each test interval begins when operator demand is set to the first operator demand setting of each test interval of the ramped modal cycle. Each test interval ends when the time in mode is reached for the last mode in the test interval.

(2) For PM emissions (and other batch sampling), the sample period over which emissions for the test interval are averaged generally begins within 10 seconds after the operator demand is changed to start the test interval and ends within 5 seconds of the sampling time for the test mode is reached (see Table 1 to this section). You may ask to delay the start of the sample period to account for sample system residence times longer than 10 seconds.

(3) Use good engineering judgment when transitioning between test intervals.

(i) You should come as close as possible to simultaneously:

(A) Ending batch sampling of the previous test interval.

(B) Starting batch sampling of the next test interval.

(C) Changing the operator demand to the notch setting for the first mode in the next test interval.

(ii) Avoid the following:

(A) Overlapping batch sampling of the two test intervals.

(B) An unnecessarily long delay before starting the next test interval.

(iii) For example, the following sequence would generally be appropriate:

(A) End batch sampling for Interval 2 after 304 seconds in Notch 5.

(B) Switch the operator demand to Notch 6 one second later.

(C) Begin batch sampling for Interval 3 one second after switching to Notch 6.

(4) If applicable, begin the smoke test at the start of the first test interval

of the applicable ramped modal cycle.

Continue collecting smoke data until the completion of final test interval. Refer to § 1033.101 to determine applicability of the smoke standards and § 1033.525 for details on how to conduct a smoke test.

(5) Proceed through each test interval of the applicable ramped modal cycle in the order specified until the test is completed.

(6) If you must void a test interval, you may repeat it. To do so, begin with a warm engine operating at the notch setting for the last mode in the previous test interval. You do not need to repeat later test intervals if they were valid.

(Note: you must report test results for all voided tests and test test intervals.)

(7) Following the completion of the third test interval of the applicable ramped modal cycle, conduct the post-test sampling procedures specified in 40 CFR 1065.530.

(f) Calculate your cycle-weighted brake-specific emission rates as follows:

(1) For each test interval j:

(i) Calculate emission rates ( $E_{ij}$ ) for each pollutant i as the total mass emissions divided by the total time in the test interval.

(ii) Calculate average power ( $P_j$ ) as the total work divided by the total time in the test interval.

(2) For each pollutant, calculate your cycle-weighted brake-specific emission rate using the following equation, where  $w_j$  is the weighting factor for test interval j:

$$E_{ij} = \frac{w_1 E_{i1} + w_2 E_{i2} + w_3 E_{i3}}{w_1 P_1 + w_2 P_{SUB2} + w_3 P_3}$$

(g) The following tables define applicable ramped modal cycles for line-haul and switch locomotives:

TABLE 1 TO § 1033.520—LINE-HAUL LOCOMOTIVE RAMPED MODAL CYCLE

RMC test interval	Weighting factor	RMC mode	Time in mode (seconds)	Notch setting
Pre-test idle .....	NA	NA	600 to 900	Lowest idle setting. <sup>1</sup>
Interval 1 (Idle test) .....	0.380	A B	600 600	Low Idle. <sup>2</sup> Normal Idle.
Interval Transition				
Interval 2 .....	0.389	C 1 2 3 4 5	1,000 520 520 416 352 304	Dynamic Brake. <sup>3</sup> Notch 1. Notch 2. Notch 3. Notch 4. Notch 5.
Interval Transition				
Interval 3 .....	0.231	6 7 8	144 111 600	Notch 6. Notch 7. Notch 8.

<sup>1</sup> See paragraph (d) of this section for alternate pre-test provisions.

<sup>2</sup> Operate at normal idle for modes A and B if not equipped with multiple idle settings.

<sup>3</sup> Operate at normal idle if not equipped with a dynamic brake.

TABLE 2 TO § 1033.520—SWITCH LOCOMOTIVE RAMPED MODAL CYCLE

RMC test interval	Weighting factor	RMC mode	Time in mode (seconds)	Notch setting
Pre-test idle .....	NA	NA	600 to 900	Lowest idle setting. <sup>1</sup>
Interval 1 (Idle test) .....	0.598	A B	600 600	Low Idle. <sup>2</sup> Normal Idle.
Interval Transition				
Interval 2 .....	0.377	1 2 3 4 5	868 861 406 252 252	Notch 1. Notch 2. Notch 3. Notch 4. Notch 5.
Interval Transition				
Interval 3 .....	0.025	6 7	1,080 144	Notch 6. Notch 7.

TABLE 2 TO § 1033.520—SWITCH LOCOMOTIVE RAMPED MODAL CYCLE—Continued

RMC test interval	Weighting factor	RMC mode	Time in mode (seconds)	Notch setting
		8	576	Notch 8.

<sup>1</sup> See paragraph (d) of this section for alternate pre-test provisions.

<sup>2</sup> Operate at normal idle for modes A and B if not equipped with multiple idle settings.

■ 103. Section 1033.535 is revised to read as follows:

**§ 1033.535 Adjusting emission levels to account for infrequently regenerating aftertreatment devices.**

For locomotives using aftertreatment technology with infrequent regeneration events that may occur during testing, take one of the following approaches to account for the emission impact of regeneration:

(a) You may use the calculation methodology described in 40 CFR 1065.680 to adjust measured emission results. Do this by developing an upward adjustment factor and a downward adjustment factor for each pollutant based on measured emission data and observed regeneration frequency as follows:

(1) Adjustment factors should generally apply to an entire engine family, but you may develop separate adjustment factors for different configurations within an engine family. Use the adjustment factors from this section for all testing for the engine family.

(2) You may use carryover or carry-across data to establish adjustment factors for an engine family as described in § 1033.235, consistent with good engineering judgment.

(3) Determine the frequency of regeneration, *F*, as described in 40 CFR 1065.680 from in-use operating data or from running repetitive tests in a laboratory. If the engine is designed for regeneration at fixed time intervals, you may apply good engineering judgment to determine *F* based on those design parameters.

(4) Identify the value of *F* in each application for the certification for which it applies.

(5) Apply the provisions for ramped-modal testing based on measurements for each test interval rather than the whole ramped-modal test.

(b) You may ask us to approve an alternate methodology to account for regeneration events. We will generally limit approval to cases where your engines use aftertreatment technology with extremely infrequent regeneration and you are unable to apply the provisions of this section.

(c) You may choose to make no adjustments to measured emission

results if you determine that regeneration does not significantly affect emission levels for an engine family (or configuration) or if it is not practical to identify when regeneration occurs. If you choose not to make adjustments under paragraph (a) or (b) of this section, your locomotives must meet emission standards for all testing, without regard to regeneration.

**Subpart G—Special Compliance Provisions**

■ 104. Section 1033.601 is amended by adding paragraph (f) to read as follows:

**§ 1033.601 General compliance provisions.**

\* \* \* \* \*

(f) *Multi-fuel locomotives.* Subpart C of this part describes how to test and certify dual-fuel and flexible-fuel locomotives. Some multi-fuel locomotives may not fit either of those defined terms. For such locomotives, we will determine whether it is most appropriate to treat them as single-fuel locomotives, dual-fuel locomotives, or flexible-fuel locomotives based on the range of possible and expected fuel mixtures. For example, a locomotive might burn natural gas but initiate combustion with a pilot injection of diesel fuel. If the locomotive is designed to operate with a single fueling algorithm (*i.e.*, fueling rates are fixed at a given engine speed and load condition), we would generally treat it as a single-fuel locomotive. In this context, the combination of diesel fuel and natural gas would be its own fuel type. If the locomotive is designed to also operate on diesel fuel alone, we would generally treat it as a dual-fueled locomotive. If the locomotive is designed to operate on varying mixtures of the two fuels, we would generally treat it as a flexible-fueled locomotive. To the extent that requirements vary for the different fuels or fuel mixtures, we may apply the more stringent requirements.

**Subpart H—Averaging, Banking, and Trading for Certification**

■ 105. Section 1033.701 is amended by adding paragraph (k) to read as follows:

**§ 1033.701 General provisions.**

\* \* \* \* \*

(k) You may use either of the following approaches to retire or forego emission credits:

(1) You may retire emission credits generated from any number of your locomotives. This may be considered donating emission credits to the environment. Identify any such credits in the reports described in § 1033.730. Locomotives must comply with the applicable FELs even if you donate or sell the corresponding emission credits under this paragraph (e). Those credits may no longer be used by anyone to demonstrate compliance with any EPA emission standards.

(2) You may certify a family using an FEL below the emission standard as described in this part and choose not to generate emission credits for that family. If you do this, you do not need to calculate emission credits for those families and you do not need to submit or keep the associated records described in this subpart for that family.

■ 106. Section 1033.710 is amended by revising paragraph (c) to read as follows:

**§ 1033.710 Averaging emission credits.**

\* \* \* \* \*

(c) If you certify an engine family to an FEL that exceeds the otherwise applicable emission standard, you must obtain enough emission credits to offset the engine family's deficit by the due date for the final report required in § 1033.730. The emission credits used to address the deficit may come from your other engine families that generate emission credits in the same model year, from emission credits you have banked from previous model years, or from emission credits generated in the same or previous model years that you obtained through trading or by transfer.

■ 107. Section 1033.725 is amended by revising paragraph (b)(2) to read as follows:

**§ 1033.725 Requirements for your application for certification.**

\* \* \* \* \*

(b) \* \* \*  
(2) Detailed calculations of projected emission credits (positive or negative) based on projected production volumes. We may require you to include similar calculations from your other engine families to demonstrate that you will be able to avoid negative credit balances

for the model year. If you project negative emission credits for a family, state the source of positive emission credits you expect to use to offset the negative emission credits.

■ 108. Section 1033.730 is amended by revising paragraphs (b)(1), (b)(4), and (c)(2) to read as follows:

**§ 1033.730 ABT reports.**

\* \* \* \* \*

(b) \* \* \*

(1) Engine family designation and averaging sets (whether switch, line-haul, or both).

\* \* \* \* \*

(4) The projected and actual U.S.-directed production volumes for the model year as described in § 1033.705. If you changed an FEL during the model year, identify the actual U.S.-directed production volume associated with each FEL.

\* \* \* \* \*

(c) \* \* \*

(2) State whether you will retain any emission credits for banking. If you choose to retire emission credits that would otherwise be eligible for banking, identify the engine families that generated the emission credits, including the number of emission credits from each family.

\* \* \* \* \*

■ 109. Section 1033.735 is amended by revising paragraphs (a) and (b) to read as follows:

**§ 1033.735 Required records.**

(a) You must organize and maintain your records as described in this section.

(b) Keep the records required by this section for at least eight years after the due date for the end-of-year report. You may not use emission credits for any engines if you do not keep all the records required under this section. You must therefore keep these records to continue to bank valid credits.

\* \* \* \* \*

**Subpart I—Requirements for Owners and Operators**

■ 110. Section 1033.815 is amended by revising paragraphs (b) and (e) introductory text to read as follows:

**§ 1033.815 Maintenance, operation, and repair.**

\* \* \* \* \*

(b) Perform unscheduled maintenance in a timely manner. This includes malfunctions identified through the locomotive's emission control diagnostics system and malfunctions discovered in components of the diagnostics system itself. For most

repairs, this paragraph (b) requires that the maintenance be performed no later than the locomotive's next periodic (92-day or 184-day) inspection. See paragraph (e) of this section, for reductant replenishment requirements in a locomotive equipped with an SCR system.

\* \* \* \* \*

(e) For locomotives equipped with emission controls requiring the use of specific fuels, lubricants, or other fluids, proper maintenance includes complying with the manufacturer/remanufacturer's specifications for such fluids when operating the locomotives. This requirement applies without regard to whether misfueling permanently disables the emission controls. For locomotives certified on ultra-low sulfur diesel fuel, but that do not include sulfur-sensitive emission controls, you may use low-sulfur diesel fuel instead of ultra-low sulfur diesel fuel, consistent with good engineering judgment. The following additional provisions apply for locomotives equipped with SCR systems requiring the use of urea or other reductants:

\* \* \* \* \*

**Subpart J—Definitions and Other Reference Information**

■ 111. Section 1033.901 is amended as follows:

■ a. By revising the definition for “Designated Compliance Officer”.

■ b. By adding definitions for “Dual-fuel” and “Flexible-fuel”.

■ c. By revising the definitions for “Remanufacture system or remanufacturing system” and “Total hydrocarbon equivalent”.

The revisions and addition read as follows:

**§ 1033.901 Definitions.**

\* \* \* \* \*

*Designated Compliance Officer* means the Director, Diesel Engine Compliance Center, U.S. Environmental Protection Agency, 2000 Traverwood Drive, Ann Arbor, MI 48105; *complianceinfo@epa.gov*; *epa.gov/otaq/verify*.

\* \* \* \* \*

*Dual-fuel* means relating to a locomotive designed for operation on two different fuels but not on a continuous mixture of those fuels (see § 1033.601(f)). For purposes of this part, such a locomotive remains a dual-fuel locomotive even if it is designed for operation on three or more different fuels.

\* \* \* \* \*

*Flexible-fuel* means relating to a locomotive designed for operation on

any mixture of two or more different fuels (see § 1033.601(f)).

\* \* \* \* \*

*Remanufacture system or remanufacturing system* means all components (or specifications for components) and instructions necessary to remanufacture a locomotive or locomotive engine in accordance with applicable requirements of this part.

\* \* \* \* \*

*Total hydrocarbon equivalent* has the meaning given in 40 CFR 1065.1001. This generally means the sum of the carbon mass contributions of non-oxygenated hydrocarbon, alcohols and aldehydes, or other organic compounds that are measured separately as contained in a gas sample, expressed as exhaust hydrocarbon from petroleum-fueled locomotives. The atomic hydrogen-to-carbon ratio of the equivalent hydrocarbon is 1.85:1.

\* \* \* \* \*

■ 112. Section 1033.915 is revised to read as follows:

**§ 1033.915 Confidential information.**

The provisions of 40 CFR 1068.10 apply for information you consider confidential.

■ 113. Section 1033.925 is revised to read as follows:

**§ 1033.925 Reporting and recordkeeping requirements.**

(a) This part includes various requirements to submit and record data or other information. Unless we specify otherwise, store required records in any format and on any media and keep them readily available for eight years after you send an associated application for certification, or eight years after you generate the data if they do not support an application for certification. You are expected to keep your own copy of required records rather than relying on someone else to keep records on your behalf. We may review these records at any time. You must promptly send us organized, written records in English if we ask for them. We may require you to submit written records in an electronic format.

(b) The regulations in § 1033.255, 40 CFR 1068.25, and 40 CFR 1068.101 describe your obligation to report truthful and complete information. This includes information not related to certification. Failing to properly report information and keep the records we specify violates 40 CFR 1068.101(a)(2), which may involve civil or criminal penalties.

(c) Send all reports and requests for approval to the Designated Compliance Officer (see § 1033.801).

(d) Any written information we require you to send to or receive from another company is deemed to be a required record under this section. Such records are also deemed to be submissions to EPA. We may require you to send us these records whether or not you are a certificate holder.

(e) Under the Paperwork Reduction Act (44 U.S.C. 3501 *et seq.*), the Office of Management and Budget approves the reporting and recordkeeping specified in the applicable regulations. Failing to properly report information and keep the records we specify violates 40 CFR 1068.101(a)(2), which may involve civil or criminal penalties. The following items illustrate the kind of reporting and recordkeeping we require for locomotives regulated under this part:

(1) We specify the following requirements related to locomotive certification in this part 1033:

(i) In § 1033.150 we state the requirements for interim provisions.

(ii) In subpart C of this part we identify a wide range of information required to certify engines.

(iii) In § 1033.325 we specify certain records related to production-line testing.

(iv) In subpart G of this part we identify several reporting and recordkeeping items for making demonstrations and getting approval

related to various special compliance provisions.

(v) In §§ 1033.725, 1033.730, and 1033.735 we specify certain records related to averaging, banking, and trading.

(vi) In subpart I of this part we specify certain records related to meeting requirements for remanufactured engines.

(2) We specify the following requirements related to testing in 40 CFR part 1065:

(i) In 40 CFR 1065.2 we give an overview of principles for reporting information.

(ii) In 40 CFR 1065.10 and 1065.12 we specify information needs for establishing various changes to published test procedures.

(iii) In 40 CFR 1065.25 we establish basic guidelines for storing test information.

(iv) In 40 CFR 1065.695 we identify the specific information and data items to record when measuring emissions.

(3) We specify the following requirements related to the general compliance provisions in 40 CFR part 1068:

(i) In 40 CFR 1068.5 we establish a process for evaluating good engineering judgment related to testing and certification.

(ii) In 40 CFR 1068.25 we describe general provisions related to sending and keeping information.

(iii) In 40 CFR 1068.27 we require manufacturers to make locomotives available for our testing or inspection if we make such a request.

(iv) In 40 CFR part 1068, subpart C, we identify several reporting and recordkeeping items for making demonstrations and getting approval related to various exemptions.

(v) In 40 CFR part 1068, subpart D, we identify several reporting and recordkeeping items for making demonstrations and getting approval related to importing locomotives and engines.

(vi) In 40 CFR 1068.450 and 1068.455 we specify certain records related to testing production-line locomotives in a selective enforcement audit.

(vii) In 40 CFR 1068.501 we specify certain records related to investigating and reporting emission-related defects.

(viii) In 40 CFR 1068.525 and 1068.530 we specify certain records related to recalling nonconforming locomotives.

■ 114. Appendix I to part 1033 is added to read as follows:

#### **Appendix I to Part 1033—Original Standards for Tier 0, Tier 1 and Tier 2 Locomotives**

(a) The following emission standards applied for new locomotives not yet subject to this part 1033:

Type of standard	Year of original manufacture	Tier	Standards (g/bhp-hr)		
			NO <sub>x</sub>	PM—primary	PM—alternate <sup>a</sup>
Line-haul .....	1973–1992	Tier 0 .....	9.5	0.60	0.30
	1993–2004	Tier 1 .....	7.4	0.45	0.22
	2005–2011	Tier 2 .....	5.5	0.20	0.10
Switch .....	1973–1992	Tier 0 .....	14.0	0.72	0.36
	1993–2004	Tier 1 .....	11.0	0.54	0.27
	2005–2011	Tier 2 .....	8.1	0.24	0.12

<sup>a</sup> Locomotives certified to the alternate PM standards are also subject to alternate CO standards of 10.0 for the line-haul cycle and 12.0 for the switch cycle.

(b) The original Tier 0, Tier 1, and Tier 2 standards for HC and CO emissions and smoke are the same standards identified in § 1033.101.

■ 115. Part 1036 is revised to read as follows:

## **PART 1036—CONTROL OF EMISSIONS FROM NEW AND IN-USE HEAVY-DUTY HIGHWAY ENGINES**

### **Subpart A—Overview and Applicability**

Sec.

1036.1 Does this part apply for my engines?

1036.2 Who is responsible for compliance?

1036.5 Which engines are excluded from this part's requirements?

1036.10 How is this part organized?

1036.15 Do any other regulation parts apply to me?

1036.30 Submission of information.

### **Subpart B—Emission Standards and Related Requirements**

1036.100 Overview of exhaust emission standards.

1036.108 Greenhouse gas emission standards.

1036.115 Other requirements.

1036.130 Installation instructions for vehicle manufacturers.

1036.135 Labeling.

1036.140 Primary intended service class and engine cycle.

1036.150 Interim provisions.

### **Subpart C—Certifying Engine Families**

1036.205 What must I include in my application?

1036.210 Preliminary approval before certification.

1036.225 Amending my application for certification.

1036.230 Selecting engine families.

1036.235 Testing requirements for certification.

1036.241 Demonstrating compliance with greenhouse gas emission standards.

1036.250 Reporting and recordkeeping for certification.

1036.255 What decisions may EPA make regarding my certificate of conformity?

### **Subpart D—Testing Production Engines**

1036.301 Measurements related to GEM inputs in a selective enforcement audit.

### **Subpart E—In-use Testing**

1036.401 In-use testing.

**Subpart F—Test Procedures**

- 1036.501 How do I run a valid emission test?
- 1036.525 Hybrid engines.
- 1036.530 Calculating greenhouse gas emission rates.
- 1036.535 Determining engine fuel maps and fuel consumption at idle.

**Subpart G—Special Compliance Provisions**

- 1036.601 What compliance provisions apply?
- 1036.610 Off-cycle technology credits and adjustments for reducing greenhouse gas emissions.
- 1036.615 Engines with Rankine cycle waste heat recovery and hybrid powertrains.
- 1036.620 Alternate CO<sub>2</sub> standards based on model year 2011 compression-ignition engines.
- 1036.625 In-use compliance with family emission limits (FELs).
- 1036.630 Certification of engine GHG emissions for powertrain testing.

**Subpart H—Averaging, Banking, and Trading for Certification**

- 1036.701 General provisions.
- 1036.705 Generating and calculating emission credits.
- 1036.710 Averaging.
- 1036.715 Banking.
- 1036.720 Trading.
- 1036.725 What must I include in my application for certification?
- 1036.730 ABT reports.
- 1036.735 Recordkeeping.
- 1036.740 Restrictions for using emission credits.
- 1036.745 End-of-year CO<sub>2</sub> credit deficits.
- 1036.750 What can happen if I do not comply with the provisions of this subpart?
- 1036.755 Information provided to the Department of Transportation.

**Subpart I—Definitions and Other Reference Information**

- 1036.801 Definitions.
- 1036.805 Symbols, abbreviations, and acronyms.
- 1036.810 Incorporation by reference.
- 1036.815 Confidential information.
- 1036.820 Requesting a hearing.
- 1036.825 Reporting and recordkeeping requirements.

Authority: 42 U.S.C. 7401–7671q.

**Subpart A—Overview and Applicability****§ 1036.1 Does this part apply for my engines?**

(a) Except as specified in § 1036.5, the provisions of this part apply for engines that will be installed in heavy-duty vehicles above 14,000 pounds GVWR for propulsion. These provisions also apply for engines that will be installed in incomplete heavy-duty vehicles at or below 14,000 pounds GVWR unless the engine is installed in a vehicle that is covered by a certificate of conformity under 40 CFR part 86, subpart S.

(b) This part does not apply with respect to exhaust emission standards

for HC, CO, NO<sub>x</sub>, or PM except as follows:

(1) The provisions of § 1036.601 apply.

(2) 40 CFR parts 85 and/or 86 may specify that certain provisions apply.

(c) The provisions of this part also apply for fuel conversions of all engines described in paragraph (a) of this section as described in 40 CFR 85.502.

(d) Gas turbine heavy-duty engines and other heavy-duty engines not meeting the definition *compression-ignition* or *spark-ignition* are deemed to be compression-ignition engines for purposes of this part.

**§ 1036.2 Who is responsible for compliance?**

The regulations in this part 1036 contain provisions that affect both engine manufacturers and others. However, the requirements of this part are generally addressed to the engine manufacturer(s). The term “you” generally means the engine manufacturer(s), especially for issues related to certification. Additional requirements and prohibitions apply to other persons as specified in § 1036.601 and 40 CFR part 1068.

**§ 1036.5 Which engines are excluded from this part's requirements?**

(a) The provisions of this part do not apply to engines used in medium-duty passenger vehicles or other heavy-duty vehicles that are subject to regulation under 40 CFR part 86, subpart S, except as specified in 40 CFR part 86, subpart S, and § 1036.108(a)(4). For example, this exclusion applies for engines used in vehicles certified to the standards of 40 CFR 86.1819.

(b) An engine installed in a heavy-duty vehicle that is not used to propel the vehicle is not a heavy-duty engine. The provisions of this part therefore do not apply to these engines. Note that engines used to indirectly propel the vehicle (such as electrical generator engines that provide power to batteries for propulsion) are subject to this part. See 40 CFR part 1039, 1048, or 1054 for other requirements that apply for these auxiliary engines. See 40 CFR part 1037 for requirements that may apply for vehicles using these engines, such as the evaporative emission requirements of 40 CFR 1037.103.

(c) The provisions of this part do not apply to aircraft or aircraft engines. Standards apply separately to certain aircraft engines, as described in 40 CFR part 87.

(d) The provisions of this part do not apply to engines that are not internal combustion engines. For example, the provisions of this part do not apply to fuel cells.

(e) The provisions of this part do not apply for model year 2013 and earlier heavy-duty engines unless they were voluntarily certified to this part.

**§ 1036.10 How is this part organized?**

This part 1036 is divided into the following subparts:

(a) Subpart A of this part defines the applicability of this part 1036 and gives an overview of regulatory requirements.

(b) Subpart B of this part describes the emission standards and other requirements that must be met to certify engines under this part. Note that § 1036.150 describes certain interim requirements and compliance provisions that apply only for a limited time.

(c) Subpart C of this part describes how to apply for a certificate of conformity.

(d) [Reserved]

(e) Subpart E of this part describes provisions for testing in-use engines.

(f) Subpart F of this part describes how to test your engines (including references to other parts of the Code of Federal Regulations).

(g) Subpart G of this part describes requirements, prohibitions, and other provisions that apply to engine manufacturers, vehicle manufacturers, owners, operators, rebuilders, and all others.

(h) Subpart H of this part describes how you may generate and use emission credits to certify your engines.

(i) Subpart I of this part contains definitions and other reference information.

**§ 1036.15 Do any other regulation parts apply to me?**

(a) Part 86 of this chapter describes additional requirements that apply to engines that are subject to this part 1036. This part extensively references portions of 40 CFR part 86. For example, the regulations of part 86 specify emission standards and certification procedures related to criteria pollutants.

(b) Part 1037 of this chapter describes requirements for controlling evaporative emissions and greenhouse gas emissions from heavy-duty vehicles, whether or not they use engines certified under this part. It also includes standards and requirements that apply instead of the standards and requirements of this part in some cases.

(c) Part 1065 of this chapter describes procedures and equipment specifications for testing engines to measure exhaust emissions. Subpart F of this part 1036 describes how to apply the provisions of part 1065 of this chapter to determine whether engines meet the exhaust emission standards in this part.



(d) Certain provisions of part 1068 of this chapter apply as specified in § 1036.601 to everyone, including anyone who manufactures, imports, installs, owns, operates, or rebuilds any of the engines subject to this part 1036, or vehicles containing these engines. Part 1068 of this chapter describes general provisions that apply broadly, but do not necessarily apply for all engines or all persons. See § 1036.601 to determine how to apply the part 1068 regulations for heavy-duty engines. The issues addressed by these provisions include these seven areas:

- (1) Prohibited acts and penalties for engine manufacturers, vehicle manufacturers, and others.
- (2) Rebuilding and other aftermarket changes.
- (3) Exclusions and exemptions for certain engines.
- (4) Importing engines.
- (5) Selective enforcement audits of your production.
- (6) Recall.
- (7) Procedures for hearings.
- (e) Other parts of this chapter apply if referenced in this part.

#### § 1036.30 Submission of information.

Unless we specify otherwise, send all reports and requests for approval to the Designated Compliance Officer (see § 1036.801). See § 1036.825 for additional reporting and recordkeeping provisions.

### Subpart B—Emission Standards and Related Requirements

#### § 1036.100 Overview of exhaust emission standards.

Engines used in vehicles certified to the applicable chassis standards for greenhouse gases described in 40 CFR 86.1819 are not subject to the standards specified in this part. All other engines subject to this part must meet the greenhouse gas standards in § 1036.108 in addition to the criteria pollutant standards of 40 CFR part 86.

#### § 1036.108 Greenhouse gas emission standards.

This section contains standards and other regulations applicable to the emission of the air pollutant defined as the aggregate group of six greenhouse gases: Carbon dioxide, nitrous oxide, methane, hydrofluorocarbons, perfluorocarbons, and sulfur hexafluoride. This section describes the applicable CO<sub>2</sub>, N<sub>2</sub>O, and CH<sub>4</sub> standards for engines. These standards do not apply for engines used in vehicles subject to (or voluntarily certified to) the CO<sub>2</sub>, N<sub>2</sub>O, and CH<sub>4</sub> standards for vehicles specified in 40 CFR 86.1819.

(a) *Emission standards.* Emission standards apply for engines measured using the test procedures specified in subpart F of this part as follows:

- (1) CO<sub>2</sub> emission standards apply as specified in this paragraph (a)(1). The applicable test cycle for measuring CO<sub>2</sub> emissions differs depending on the engine family's primary intended service class and the extent to which the engines will be (or were designed to be)

used in tractors. For medium and heavy heavy-duty engines certified as tractor engines, measure CO<sub>2</sub> emissions using the steady-state duty cycle specified in 40 CFR 86.1362 (referred to as the ramped-modal cycle, or RMC, even though emission sampling involves measurements from discrete modes). This is intended for engines designed to be used primarily in tractors and other line-haul applications. Note that the use of some RMC-certified tractor engines in vocational applications does not affect your certification obligation under this paragraph (a)(1); see other provisions of this part and 40 CFR part 1037 for limits on using engines certified to only one cycle. For medium and heavy heavy-duty engines certified as both tractor and vocational engines, measure CO<sub>2</sub> emissions using the steady-state duty cycle and the transient duty cycle (sometimes referred to as the FTP engine cycle), both of which are specified in 40 CFR part 86, subpart N. This is intended for engines that are designed for use in both tractor and vocational applications. For all other engines (including all spark-ignition engines), measure CO<sub>2</sub> emissions using the appropriate transient duty cycle specified in 40 CFR part 86, subpart N.

(i) The CO<sub>2</sub> standard for model year 2016 and later spark-ignition engines is 627 g/hp-hr.

(ii) The following CO<sub>2</sub> standards apply for compression-ignition engines, including engines that are deemed to be compression-ignition engines under § 1036.1 (in g/hp-hr):

Model years	Light heavy-duty	Medium heavy-duty—vocational	Heavy heavy-duty—vocational	Medium heavy-duty—tractor	Heavy heavy-duty—tractor
2014–2016 .....	600	600	567	502	475
2017–2020 .....	576	576	555	487	460
2021–2023 .....	565	565	544	479	453
2024–2026 .....	556	556	536	469	443
2027 and later .....	553	553	533	466	441

(2) The CH<sub>4</sub> emission standard is 0.10 g/hp-hr when measured over the applicable transient duty cycle specified in 40 CFR part 86, subpart N. This standard begins in model year 2014 for compression-ignition engines and in model year 2016 for spark-ignition engines. Note that this standard applies for all fuel types just as the other standards of this section do.

(3) N<sub>2</sub>O emission standards applies as follows for engines when measured over the appropriate transient duty cycle specified in 40 CFR part 86, subpart N:

(i) An emission standard of 0.05 g/hp-hr applies for model year 2021 and later engines.

(ii) An emission standard of 0.10 g/hp-hr applies for compression-ignition engines for model years 2014 through 2020.

(iii) An emission standard of 0.10 g/hp-hr applies for spark-ignition engines for model years 2016 through 2020.

(b) *Family certification levels.* You must specify a CO<sub>2</sub> Family Certification Level (FCL) for each engine family. The FCL may not be less than the certified emission level for the engine family. The CO<sub>2</sub> Family Emission Limit (FEL)

for the engine family is equal to the FCL multiplied by 1.03.

(c) *Averaging, banking, and trading.* You may generate or use emission credits under the averaging, banking, and trading (ABT) program described in subpart H of this part for demonstrating compliance with CO<sub>2</sub> emission standards. Credits (positive and negative) are calculated from the difference between the FCL and the applicable emission standard. As described in § 1036.705, you may use CO<sub>2</sub> credits to certify your engine families to FELs for N<sub>2</sub>O and/or CH<sub>4</sub>, instead of the N<sub>2</sub>O/CH<sub>4</sub> standards of this

section that otherwise apply. Except as specified in §§ 1036.150 and 1036.705, you may not generate or use credits for N<sub>2</sub>O or CH<sub>4</sub> emissions.

(d) *Useful life.* The exhaust emission standards of this section apply for the full useful life, expressed in service miles, operating hours, or calendar years, whichever comes first. The useful life values applicable to the criteria pollutant standards of 40 CFR part 86 apply for the standards of this section, except that model year 2021 and later spark-ignition engines and light heavy-duty compression-ignition engines are subject to the standards of this section over a useful life of 15 years or 150,000 miles, whichever comes first.

(e) *Applicability for testing.* The emission standards in this subpart apply as specified in this paragraph (e) to all duty-cycle testing (according to the applicable test cycles) of testable configurations, including certification, selective enforcement audits, and in-use testing. The CO<sub>2</sub> FCLs serve as the CO<sub>2</sub> emission standards for the engine family with respect to certification and confirmatory testing instead of the standards specified in paragraph (a)(1) of this section. The FELs serve as the emission standards for the engine family with respect to all other duty-cycle testing. See §§ 1036.235 and 1036.241 to determine which engine configurations within the engine family are subject to testing. Note that fuel maps and powertrain test results also serve as standards as described in § 1036.535, § 1036.630 and 40 CFR 1037.550.

(f) *Multi-fuel engines.* For dual-fuel, multi-fuel, and flexible-fuel engines, perform exhaust testing on each fuel type (for example, gasoline and E85).

(1) This paragraph (f)(1) applies where you demonstrate the relative amount of each fuel type that your engines consume in actual use. Based on your demonstration, we will specify a weighting factor and allow you to submit the weighted average of your emission results. For example, if you certify an E85 flexible-fuel engine and we determine the engine will produce one-half of its work from E85 and one-half of its work from gasoline, you may apply a 50% weighting factor to each of your E85 and gasoline emission results.

(2) If you certify your engine family to N<sub>2</sub>O and/or CH<sub>4</sub> FELs the FELs apply for testing on all fuel types for which your engine is designed, to the same extent as criteria emission standards apply.

#### § 1036.115 Other requirements.

(a) The warranty and maintenance requirements, adjustable parameter provisions, and defeat device prohibition of 40 CFR part 86 apply

with respect to the standards of this part.

(b) You must create a fuel map and establish idle-specific fuel-consumption values for your engine as described in § 1036.535. You may alternatively perform powertrain testing as specified in § 1036.630 and 40 CFR 1037.550 for some or all of your configurations within the engine family.

(c) You must design and produce your engines to comply with evaporative emission standards as follows:

(1) For complete heavy-duty vehicles you produce, you must certify the vehicles to emission standards as specified in 40 CFR 1037.103.

(2) For incomplete heavy-duty vehicles, and for engines used in vehicles you do not produce, you do not need to certify your engines to evaporative emission standards or otherwise meet those standards. However, vehicle manufacturers certifying their vehicles with your engines may depend on you to produce your engines according to their specifications. Also, your engines must meet applicable exhaust emission standards in the installed configuration.

#### § 1036.130 Installation instructions for vehicle manufacturers.

(a) If you sell an engine for someone else to install in a vehicle, give the engine installer instructions for installing it consistent with the requirements of this part. Include all information necessary to ensure that an engine will be installed in its certified configuration.

(b) Make sure these instructions have the following information:

(1) Include the heading: "Emission-related installation instructions".

(2) State: "Failing to follow these instructions when installing a certified engine in a heavy-duty motor vehicle violates federal law, subject to fines or other penalties as described in the Clean Air Act."

(3) Provide all instructions needed to properly install the exhaust system and any other components.

(4) Describe any necessary steps for installing any diagnostic system required under 40 CFR part 86.

(5) Describe how your certification is limited for any type of application. For example, if you certify heavy heavy-duty engines to the CO<sub>2</sub> standards using only steady-state transient FTP testing, you must make clear that the engine may not be installed in tractors.

(6) Describe any other instructions to make sure the installed engine will operate according to design specifications in your application for certification. This may include, for

example, instructions for installing aftertreatment devices when installing the engines.

(7) State: "If you install the engine in a way that makes the engine's emission control information label hard to read during normal engine maintenance, you must place a duplicate label on the vehicle, as described in 40 CFR 1068.105."

(c) Give the vehicle manufacturer fuel map results as described in § 1036.535 or powertrain results as described in § 1036.630 and 40 CFR 1037.550 for each engine configuration, as appropriate.

(d) You do not need installation instructions for engines that you install in your own vehicles.

(e) Provide instructions in writing or in an equivalent format. For example, you may post instructions on a publicly available Web site for downloading or printing. If you do not provide the instructions in writing, explain in your application for certification how you will ensure that each installer is informed of the installation requirements.

#### § 1036.135 Labeling.

Label your engines as described in 40 CFR 86.007–35(a)(3), with the following additional information:

(a) [Reserved]

(b) Identify the emission control system. Use terms and abbreviations as described in 40 CFR 1068.45 or other applicable conventions.

(c) Identify any limitations on your certification. For example, if you certify heavy heavy-duty engines to the CO<sub>2</sub> standards using only transient cycle testing, include the statement "VOCATIONAL VEHICLES ONLY".

(d) You may ask us to approve modified labeling requirements in this part 1036 if you show that it is necessary or appropriate. We will approve your request if your alternate label is consistent with the requirements of this part. We may also specify modified labeling requirement to be consistent with the intent of 40 CFR part 1037.

#### § 1036.140 Primary intended service class and engine cycle.

(a) You must identify a single primary intended service class for each engine family. Select the class that best describes vehicles for which you design and market the engine. There are three primary intended service classes for vehicles with engines that are not gasoline-fueled: Light heavy-duty, medium heavy-duty, and heavy heavy-duty. Unless otherwise specified, engines that qualify as medium heavy-

duty or heavy heavy-duty engines and do not operate on gasoline must meet all the emission standards and other requirements of this part that apply for compression-ignition engines, even if they qualify under the definitions as spark-ignition engines. Also, spark-ignition engines that qualify as light heavy-duty engines must meet all the emission standards and other requirements of this part that apply for spark-ignition engines, regardless of fuel. These spark-ignition light-heavy-duty engines and all sizes of gasoline-fueled heavy-duty engines together form a separate primary intended service class. For purposes of this section, dual-fuel and flexible fuel engines that operate on gasoline are considered gasoline-fueled engines.

(b) Divide engines other than gasoline-fueled engines into primary intended service classes based on the following engine and vehicle characteristics:

(1) Light heavy-duty engines usually are not designed for rebuild and do not have cylinder liners. Vehicle body types in this group might include any heavy-duty vehicle built from a light-duty truck chassis, van trucks, multi-stop vans, motor homes and other recreational vehicles, and some straight trucks with a single rear axle. Typical applications would include personal transportation, light-load commercial delivery, passenger service, agriculture, and construction. The GVWR of these vehicles is normally below 19,500 pounds.

(2) Medium heavy-duty engines may be designed for rebuild and may have cylinder liners. Vehicle body types in this group would typically include school buses, straight trucks with dual rear axles, city tractors, and a variety of special purpose vehicles such as small dump trucks, and refuse trucks. Typical applications would include commercial short haul and intra-city delivery and pickup. Engines in this group are normally used in vehicles whose GVWR ranges from 19,500 to 33,000 pounds.

(3) Heavy heavy-duty engines are designed for multiple rebuilds and have cylinder liners. Vehicles in this group are normally tractors, trucks, and buses used in inter-city, long-haul applications. These vehicles normally exceed 33,000 pounds GVWR.

#### § 1036.150 Interim provisions.

The provisions in this section apply instead of other provisions in this part.

(a) *Early banking of greenhouse gas emissions.* You may generate CO<sub>2</sub> emission credits for engines you certify in model year 2013 (2015 for spark-ignition engines) to the standards of § 1036.108.

(1) Except as specified in paragraph (a)(2) of this section, to generate early credits, you must certify your entire U.S.-directed production volume within that averaging set to these standards. This means that you may not generate early credits while you produce engines in the averaging set that are certified to the criteria pollutant standards but not to the greenhouse gas standards. Calculate emission credits as described in subpart H of this part relative to the standard that would apply for model year 2014 (2016 for spark-ignition engines).

(2) You may generate early credits for an individual compression-ignition engine family where you demonstrate that you have improved a model year 2013 engine model's CO<sub>2</sub> emissions relative to its 2012 baseline level and certify it to an FCL below the applicable standard. Calculate emission credits as described in subpart H of this part relative to the lesser of the standard that would apply for model year 2014 engines or the baseline engine's CO<sub>2</sub> emission rate. Use the smaller U.S.-directed production volume of the 2013 engine family or the 2012 baseline engine family. We will not allow you to generate emission credits under this paragraph (a)(2) unless we determine that your 2013 engine is the same engine as the 2012 baseline or that it replaces it.

(3) You may bank credits equal to the surplus credits you generate under this paragraph (a) multiplied by 1.50. For example, if you have 10 Mg of surplus credits for model year 2013, you may bank 15 Mg of credits. Credit deficits for an averaging set prior to model year 2014 (2016 for spark-ignition engines) do not carry over to model year 2014 (2016 for spark-ignition engines). We recommend that you notify us of your intent to use this provision before submitting your applications.

(b) *Model year 2014 N<sub>2</sub>O standards.* In model year 2014 and earlier, manufacturers may show compliance with the N<sub>2</sub>O standards using an engineering analysis. This allowance also applies for later families certified using carryover CO<sub>2</sub> data from model 2014 consistent with § 1036.235(d).

(c) *Engine cycle classification.* Through model year 2020, engines

meeting the definition of spark-ignition, but regulated as diesel engines under 40 CFR part 86, must be certified to the requirements applicable to compression-ignition engines under this part. Such engines are deemed to be compression-ignition engines for purposes of this part. Similarly, engines meeting the definition of compression-ignition, but regulated as Otto-cycle under 40 CFR part 86 must be certified to the requirements applicable to spark-ignition engines under this part. Such engines are deemed to be spark-ignition engines for purposes of this part. See § 1036.140 for provisions that apply for model year 2021 and later.

(d) *Small manufacturers.* Standards apply on a delayed schedule for manufacturers meeting the small business criteria specified in 13 CFR 121.201. Apply the small business criteria for NAICS code 336310 for engine manufacturers with respect to gasoline-fueled engines, 333618 for engine manufacturers with respect to other engines, and 811198 with respect to fuel conversions with engines manufactured by a different company. Qualifying manufacturers are not subject to the greenhouse gas emission standards in § 1036.108 for engines built before January 1, 2022. In addition, qualifying manufacturers producing engines that run on any fuel other than gasoline, E85, or diesel fuel may delay complying with every new standard under this part by one model year. Small businesses may certify their engines and generate emission credits under this part 1036 before standards start to apply, but only if they certify their entire U.S.-directed production volume within that averaging set for that model year.

(e) *Alternate phase-in standards.* Where a manufacturer certifies all of its model year 2013 compression-ignition engines within a given primary intended service class to the applicable alternate standards of this paragraph (e), its compression-ignition engines within that primary intended service class are subject to the standards of this paragraph (e) for model years 2013 through 2016. This means that once a manufacturer chooses to certify a primary intended service class to the standards of this paragraph (e), it is not allowed to opt out of these standards. Engines certified to these standards are not eligible for early credits under paragraph (a) of this section.

Tractors	LHD Engines	MHD Engines	HHD Engines
Model Years 2013–2015. ....	NA .....	512 g/hp-hr .....	485 g/hp-hr.

Tractors	LHD Engines	MHD Engines	HHD Engines
Model Years 2016 and later. <sup>a</sup> .....	NA .....	487 g/hp-hr .....	460 g/hp-hr.
Vocational .....	LHD Engines .....	MHD Engines .....	HHD Engines.
Model Years 2013–2015. ....	618 g/hp-hr .....	618 g/hp-hr .....	577 g/hp-hr.
Model Years 2016 and later. <sup>a</sup> .....	576 g/hp-hr .....	576 g/hp-hr .....	555 g/hp-hr.

<sup>a</sup> **Note:** These alternate standards for 2016 and later are the same as the otherwise applicable standards for 2017 and later.

(f) *Separate OBD families.* This paragraph (f) applies where you separately certify engines for the purpose of applying OBD requirements (for engines used in vehicles under 14,000 pounds GVWR) from non-OBD engines that could be certified as a single engine family. You may treat the two engine families as a single engine family in certain respects for the purpose of this part, as follows:

(1) This paragraph (f) applies only where the two families are identical in all respects except for the engine ratings offered and the inclusion of OBD.

(2) For purposes of this part and 40 CFR part 86, the two families remain two separate families except for the following:

(i) Specify the testable configurations of the non-OBD engine family as the testable configurations for the OBD family.

(ii) Submit the same CO<sub>2</sub>, N<sub>2</sub>O, and CH<sub>4</sub> emission data for both engine families.

(g) *Assigned deterioration factors.* You may use assigned deterioration factors (DFs) without performing your own durability emission tests or engineering analysis as follows:

(1) You may use an assigned additive DF of 0.0 g/hp-hr for CO<sub>2</sub> emissions from engines that do not use advanced or off-cycle technologies. If we determine it to be consistent with good engineering judgment, we may allow you to use an assigned additive DF of 0.0 g/hp-hr for CO<sub>2</sub> emissions from your engines with advanced or off-cycle technologies.

(2) You may use an assigned additive DF of 0.020 g/hp-hr for N<sub>2</sub>O emissions from any engine through model year 2020, and 0.010 g/hp-hr for later model years.

(3) You may use an assigned additive DF of 0.020 g/hp-hr for CH<sub>4</sub> emissions from any engine.

(h) *Advanced technology credits.* If you generate credits from model year 2020 and earlier engines certified for advanced technology you may multiply these credits by 1.5, except that you may not apply this multiplier and the early-credit multiplier of paragraph (a) of this section.

(i) *CO<sub>2</sub> credits for low N<sub>2</sub>O emissions.* If you certify your model year 2014, 2015, or 2016 engines to an N<sub>2</sub>O FEL

less than 0.04 g/hp-hr (provided you measure N<sub>2</sub>O emissions from your emission-data engines), you may generate additional CO<sub>2</sub> credits under this paragraph (i). Calculate the additional CO<sub>2</sub> credits from the following equation instead of the equation in § 1036.705:

$$\text{CO}_2 \text{ Credits (Mg)} = (0.04 - \text{FEL}_{\text{N}_2\text{O}}) \cdot (\text{CF}) \cdot (\text{Volume}) \cdot (\text{UL}) \cdot (10^{-6}) \cdot (298)$$

(j) *Alternate standards under 40 CFR part 86.* This paragraph (j) describes alternate emission standards for engines certified under 40 CFR 86.1819–14(k)(8). The standards of § 1036.108 do not apply for these engines. The standards in this paragraph (j) apply for emissions measured with the engine installed in a complete vehicle consistent with the provisions of 40 CFR 86.1819–14(k)(8)(vi). The CO<sub>2</sub> standard for the engines equals the test result specified in 40 CFR 86.1819–14(k)(8)(vi) multiplied by 1.10 and rounded to the nearest 0.1 g/mile. The N<sub>2</sub>O and CH<sub>4</sub> standards are both 0.05 g/mile (or any alternate standards that apply to the corresponding vehicle test group). The only requirements of this part that apply to these engines are those in this paragraph (j) and those in §§ 1036.115 through 1036.135.

(k) *ABT reports.* Through model year 2017, you may submit a final report under § 1036.730 up to 270 days after the end of the model year, as long as you send a draft report with the same information within 90 days after the end of the model year.

(l) *Credit adjustment for spark-ignition engines and light heavy-duty compression-ignition engines.* For emission credits generated from model year 2020 and earlier spark-ignition engines and light heavy-duty compression-ignition engines, multiply any banked credits that you carry forward to demonstrate compliance with model year 2021 and later standards by 1.36.

(m) *Infrequent regeneration.* For model year 2020 and earlier, you may invalidate any test interval with respect to CO<sub>2</sub> measurements if an infrequent regeneration event occurs during the test interval.

(n) *Supplying fuel maps.* Certifying engine manufacturers must supply vehicle manufacturers with fuel maps

(or powertrain test results) as described in § 1036.130 for model year 2020 engines.

## Subpart C—Certifying Engine Families

### § 1036.205 What must I include in my application?

Submit an application for certification as described in 40 CFR 86.007–21, with the following additional information:

(a) Describe the engine family's specifications and other basic parameters of the engine's design and emission controls with respect to compliance with the requirements of this part. Describe in detail all system components for controlling greenhouse gas emissions, including all auxiliary emission control devices (AECs) and all fuel-system components you will install on any production or test engine. Identify the part number of each component you describe. For this paragraph (a), treat as separate AECs any devices that modulate or activate differently from each other.

(b) Describe any test equipment and procedures that you used if you performed any tests that did not also involve measurement of criteria pollutants. Describe any special or alternate test procedures you used (see 40 CFR 1065.10(c)).

(c) Include the emission-related installation instructions you will provide if someone else installs your engines in their vehicles (see § 1036.130).

(d) Describe the label information specified in § 1036.135. We may require you to include a copy of the label.

(e) Identify the CO<sub>2</sub> FCLs with which you are certifying engines in the engine family; also identify any FELs that apply for CH<sub>4</sub> and N<sub>2</sub>O. The actual U.S.-directed production volume of configurations that have CO<sub>2</sub> emission rates at or below the FCL and CH<sub>4</sub> and N<sub>2</sub>O emission rates at or below the applicable standards or FELs must be at least one percent of your actual (not projected) U.S.-directed production volume for the engine family. Identify configurations within the family that have emission rates at or below the FCL and meet the one percent requirement. For example, if your U.S.-directed production volume for the engine family is 10,583 and the U.S.-directed

production volume for the tested rating is 75 engines, then you can comply with this provision by setting your FCL so that one more rating with a U.S.-directed production volume of at least 31 engines meets the FCL. Where applicable, also identify other testable configurations required under § 1036.230(b)(2).

(f) Identify the engine family's deterioration factors and describe how you developed them (see § 1036.241). Present any test data you used for this.

(g) Present emission data to show that you meet emission standards, as follows:

(1) Present exhaust emission data for CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O on an emission-data engine to show that your engines meet the applicable emission standards we specify in § 1036.108. Show emission figures before and after applying deterioration factors for each engine. In addition to the composite results, show individual measurements for cold-start testing and hot-start testing over the transient test cycle.

(2) Note that § 1036.235 allows you to submit an application in certain cases without new emission data.

(h) State whether your certification is limited for certain engines. For example, if you certify heavy heavy-duty engines to the CO<sub>2</sub> standards using only transient testing, the engines may be installed only in vocational vehicles.

(i) Unconditionally certify that all the engines in the engine family comply with the requirements of this part, other referenced parts of the CFR, and the Clean Air Act. Note that § 1036.235 specifies which engines to test to show that engines in the entire family comply with the requirements of this part.

(j) Include the information required by other subparts of this part. For example, include the information required by § 1036.725 if you participate in the ABT program.

(k) Include the warranty statement and maintenance instructions if we request them.

(l) Include other applicable information, such as information specified in this part or 40 CFR part 1068 related to requests for exemptions.

(m) For imported engines or equipment, identify the following:

(1) Describe your normal practice for importing engines. For example, this may include identifying the names and addresses of any agents you have authorized to import your engines. Engines imported by nonauthorized agents are not covered by your certificate.

(2) The location of a test facility in the United States where you can test your engines if we select them for testing

under a selective enforcement audit, as specified in 40 CFR part 1068, subpart E.

(n) Include information needed to certify vehicles to GHG standards under 40 CFR part 1037, as follows:

(1) Identify the engine parameters used for GEM modeling as described in 40 CFR 1037.520.

(2) Report the measured fuel consumption rate and NO<sub>x</sub> emission level corresponding to each point of the fuel map and at each measured idle point as described in § 1036.535.

(3) State whether your application is intended to cover engine emissions measured during powertrain testing under 40 CFR 1037.550; include any associated test results and powertrain information. You may omit the fuel map specified in paragraph (n)(2) of this section (but not the idle points) if you certify the powertrain test results. If you omit the fuel map data, you will be deemed to not be certifying a fuel map.

#### **§ 1036.210 Preliminary approval before certification.**

If you send us information before you finish the application, we may review it and make any appropriate determinations, especially for questions related to engine family definitions, auxiliary emission control devices, adjustable parameters, deterioration factors, testing for service accumulation, and maintenance. Decisions made under this section are considered to be preliminary approval, subject to final review and approval. We will generally not reverse a decision where we have given you preliminary approval, unless we find new information supporting a different decision. If you request preliminary approval related to the upcoming model year or the model year after that, we will make best-efforts to make the appropriate determinations as soon as practicable. We will generally not provide preliminary approval related to a future model year more than two years ahead of time.

#### **§ 1036.225 Amending my application for certification.**

Before we issue you a certificate of conformity, you may amend your application to include new or modified engine configurations, subject to the provisions of this section. After we have issued your certificate of conformity, but before the end of the model year, you may send us an amended application requesting that we include new or modified engine configurations within the scope of the certificate, subject to the provisions of this section. You must amend your application if any changes occur with respect to any

information that is included or should be included in your application.

(a) You must amend your application before you take any of the following actions:

(1) Add an engine configuration to an engine family. In this case, the engine configuration added must be consistent with other engine configurations in the engine family with respect to the criteria listed in § 1036.230.

(2) Change an engine configuration already included in an engine family in a way that may affect emissions, or change any of the components you described in your application for certification. This includes production and design changes that may affect emissions any time during the engine's lifetime.

(3) Modify an FEL and FCL for an engine family as described in paragraph (f) of this section.

(b) To amend your application for certification, send the relevant information to the Designated Compliance Officer.

(1) Describe in detail the addition or change in the engine model or configuration you intend to make.

(2) Include engineering evaluations or data showing that the amended engine family complies with all applicable requirements. You may do this by showing that the original emission-data engine is still appropriate for showing that the amended family complies with all applicable requirements.

(3) If the original emission-data engine for the engine family is not appropriate to show compliance for the new or modified engine configuration, include new test data showing that the new or modified engine configuration meets the requirements of this part.

(4) Include any other information needed to make your application correct and complete.

(c) We may ask for more test data or engineering evaluations. You must give us these within 30 days after we request them.

(d) For engine families already covered by a certificate of conformity, we will determine whether the existing certificate of conformity covers your newly added or modified engine. You may ask for a hearing if we deny your request (see § 1036.820).

(e) For engine families already covered by a certificate of conformity, you may start producing the new or modified engine configuration any time after you send us your amended application and before we make a decision under paragraph (d) of this section. However, if we determine that the affected engines do not meet applicable requirements, we will notify

you to cease production of the engines and may require you to recall the engines at no expense to the owner. Choosing to produce engines under this paragraph (e) is deemed to be consent to recall all engines that we determine do not meet applicable emission standards or other requirements and to remedy the nonconformity at no expense to the owner. If you do not provide information required under paragraph (c) of this section within 30 days after we request it, you must stop producing the new or modified engines.

(f) You may ask us to approve a change to your FEL in certain cases after the start of production, but before the end of the model year. If you change an FEL for CO<sub>2</sub>, your FCL for CO<sub>2</sub> is automatically set to your new FEL divided by 1.03. The changed FEL may not apply to engines you have already introduced into U.S. commerce, except as described in this paragraph (f). You may ask us to approve a change to your FEL in the following cases:

(1) You may ask to raise your FEL for your engine family at any time. In your request, you must show that you will still be able to meet the emission standards as specified in subparts B and H of this part. Use the appropriate FELs/FCLs with corresponding production volumes to calculate emission credits for the model year, as described in subpart H of this part.

(2) You may ask to lower the FEL for your engine family only if you have test data from production engines showing that emissions are below the proposed lower FEL (or below the proposed FCL for CO<sub>2</sub>). The lower FEL/FCL applies only to engines you produce after we approve the new FEL/FCL. Use the appropriate FELs/FCLs with corresponding production volumes to calculate emission credits for the model year, as described in subpart H of this part.

#### **§ 1036.230 Selecting engine families.**

See 40 CFR 86.001–24 for instructions on how to divide your product line into families of engines that are expected to have similar emission characteristics throughout the useful life. You must certify your engines to the standards of § 1036.108 using the same engine families you use for criteria pollutants under 40 CFR part 86. The following provisions also apply:

(a) Engines certified as hybrid engines may not be included in an engine family with engines with conventional powertrains. Note that this does not prevent you from including engines in a conventional family if they are used in hybrid vehicles, as long as you certify them conventionally.

(b) If you certify engines in the family for use as both vocational and tractor engines, you must split your family into two separate subfamilies. Indicate in the application for certification that the engine family is to be split.

(1) Calculate emission credits relative to the vocational engine standard for the number of engines sold into vocational applications and relative to the tractor engine standard for the number of engines sold into non-vocational tractor applications. You may assign the numbers and configurations of engines within the respective subfamilies at any time before submitting the final report required by § 1036.730. If the family participates in averaging, banking, or trading, you must identify the type of vehicle in which each engine is installed; we may alternatively allow you to use statistical methods to determine this for a fraction of your engines. Keep records to document this determination.

(2) If you restrict use of the test configuration for your split family to only tractors, or only vocational vehicles, you must identify a second testable configuration for the other type of vehicle (or an unrestricted configuration). Identify this configuration in your application for certification. The FCL for the engine family applies for this configuration as well as the primary test configuration.

(c) If you certify in separate engine families engines that could have been certified in vocational and tractor engine subfamilies in the same engine family, count the two families as one family for purposes of determining your obligations with respect to the OBD requirements and in-use testing requirements of 40 CFR part 86. Indicate in the applications for certification that the two engine families are covered by this paragraph (c).

(d) Engine configurations within an engine family must use equivalent greenhouse gas emission controls. Unless we approve it, you may not produce nontested configurations without the same emission control hardware included on the tested configuration. We will only approve it if you demonstrate that the exclusion of the hardware does not increase greenhouse gas emissions.

#### **§ 1036.235 Testing requirements for certification.**

This section describes the emission testing you must perform to show compliance with the greenhouse gas emission standards in § 1036.108.

(a) Select a single emission-data engine from each engine family as specified in 40 CFR part 86. The

standards of this part apply only with respect to emissions measured from this tested configuration and other configurations identified in § 1036.205(e). Note that configurations identified in § 1036.205(e) are considered to be “tested configurations” whether or not you actually tested them for certification. However, you must apply the same (or equivalent) emission controls to all other engine configurations in the engine family.

(b) Test your emission-data engines using the procedures and equipment specified in subpart F of this part. In the case of dual-fuel and flexible-fuel engines, measure emissions when operating with each type of fuel for which you intend to certify the engine. (**Note:** Measurement of criteria emissions from flexible-fuel engines generally involves operation with the fuel mixture that best represents in-use operation, or with the fuel mixture with the highest emissions.) Measure CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O emissions using the specified duty cycle(s), including cold-start and hot-start testing as specified in 40 CFR part 86, subpart N. The following provisions apply regarding test cycles for demonstrating compliance with tractor and vocational standards:

(1) If you are certifying the engine for use in tractors, you must measure CO<sub>2</sub> emissions using the ramped-modal cycle and measure CH<sub>4</sub>, and N<sub>2</sub>O emissions using the specified transient cycle.

(2) If you are certifying the engine for use in vocational applications, you must measure CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O emissions using the specified transient duty cycle, including cold-start and hot-start testing as specified in 40 CFR part 86, subpart N.

(3) You may certify your engine family for both tractor and vocational use by submitting CO<sub>2</sub> emission data from both ramped-modal and transient cycle testing and specifying FCLs for both.

(4) Engines certified for use in tractors may also be used in vocational vehicles; however, you may not knowingly circumvent the intent of this part (to reduce in-use emissions of CO<sub>2</sub>) by certifying engines designed for vocational vehicles (and rarely used in tractors) to the ramped-modal cycle and not the transient cycle. For example, we would generally not allow you to certify all your engines to the ramped-modal cycle without certifying any to the transient cycle.

(c) We may measure emissions from any of your emission-data engines.

(1) We may decide to do the testing at your plant or any other facility. If we

do this, you must deliver the engine to a test facility we designate. The engine you provide must include appropriate manifolds, aftertreatment devices, electronic control units, and other emission-related components not normally attached directly to the engine block. If we do the testing at your plant, you must schedule it as soon as possible and make available the instruments, personnel, and equipment we need.

(2) If we measure emissions on your engine, the results of that testing become the official emission results for the engine. Unless we later invalidate these data, we may decide not to consider your data in determining if your engine family meets applicable requirements. This applies equally to testing for fuel maps under § 1036.535 and to engine-based powertrain testing under § 1036.630 and 40 CFR 1037.550, except that the results of our testing at individual test points do not become the official emission result if they are lower than your declared values.

(3) Before we test one of your engines, we may set its adjustable parameters to any point within the physically adjustable ranges.

(4) Before we test one of your engines, we may calibrate it within normal production tolerances for anything we do not consider an adjustable parameter. For example, this would apply for an engine parameter that is subject to production variability because it is adjustable during production, but is not considered an adjustable parameter (as defined in § 1036.801) because it is permanently sealed. For parameters that relate to a level of performance that is itself subject to a specified range (such as maximum power output), we will generally perform any calibration under this paragraph (c)(4) in a way that keeps performance within the specified range.

(d) You may ask to use carryover emission data from a previous model year instead of doing new tests, but only if all the following are true:

(1) The engine family from the previous model year differs from the current engine family only with respect to model year, items identified in § 1036.225(a), or other characteristics unrelated to emissions. We may waive this criterion for differences we determine not to be relevant.

(2) The emission-data engine from the previous model year remains the appropriate emission-data engine under paragraph (b) of this section.

(3) The data show that the emission-data engine would meet all the requirements that apply to the engine family covered by the application for certification.

(e) We may require you to test a second engine of the same configuration in addition to the engine tested under paragraph (a) of this section.

(f) If you use an alternate test procedure under 40 CFR 1065.10 and later testing shows that such testing does not produce results that are equivalent to the procedures specified in subpart F of this part, we may reject data you generated using the alternate procedure.

#### **§ 1036.241 Demonstrating compliance with greenhouse gas emission standards.**

(a) For purposes of certification, your engine family is considered in compliance with the emission standards in § 1036.108 if all emission-data engines representing the tested configuration of that engine family have test results showing official emission results and deteriorated emission levels at or below the standards. Note that your FCLs are considered to be the applicable emission standards with which you must comply for certification.

(b) Your engine family is deemed not to comply if any emission-data engine representing the tested configuration of that engine family has test results showing an official emission result or a deteriorated emission level for any pollutant that is above an applicable emission standard (generally the FCL). Note that you may increase your FCL if any certification test results exceed your initial FCL.

(c) Apply deterioration factors to the measured emission levels for each pollutant to show compliance with the applicable emission standards. Your deterioration factors must take into account any available data from in-use testing with similar engines. Apply deterioration factors as follows:

(1) *Additive deterioration factor for greenhouse gas emissions.* Except as specified in paragraphs (c)(2) and (3) of this section, use an additive deterioration factor for exhaust emissions. An additive deterioration factor is the difference between the highest exhaust emissions (typically at the end of the useful life) and exhaust emissions at the low-hour test point. In these cases, adjust the official emission results for each tested engine at the selected test point by adding the factor to the measured emissions. If the factor is less than zero, use zero. Additive deterioration factors must be specified to one more decimal place than the applicable standard.

(2) *Multiplicative deterioration factor for greenhouse gas emissions.* Use a multiplicative deterioration factor for a pollutant if good engineering judgment

calls for the deterioration factor for that pollutant to be the ratio of the highest exhaust emissions (typically at the end of the useful life) to exhaust emissions at the low-hour test point. Adjust the official emission results for each tested engine at the selected test point by multiplying the measured emissions by the deterioration factor. If the factor is less than one, use one. A multiplicative deterioration factor may not be appropriate in cases where testing variability is significantly greater than engine-to-engine variability.

Multiplicative deterioration factors must be specified to one more significant figure than the applicable standard.

(3) *Sawtooth deterioration patterns.* The deterioration factors described in paragraphs (c)(1) and (2) of this section assume that the highest useful life emissions occur either at the end of useful life or at the low-hour test point. The provisions of this paragraph (c)(3) apply where good engineering judgment indicates that the highest useful life emissions will occur between these two points. For example, emissions may increase with service accumulation until a certain maintenance step is performed, then return to the low-hour emission levels and begin increasing again. Such a pattern may occur with battery-based electric hybrid engines. Base deterioration factors for engines with such emission patterns on the difference between (or ratio of) the point of the sawtooth at which the highest emissions occur and the low-hour test point. Note that this applies for maintenance-related deterioration only where we allow such critical emission-related maintenance.

(4) [Reserved]

(5) *Dual-fuel and flexible-fuel engines.* In the case of dual-fuel and flexible-fuel engines, apply deterioration factors separately for each fuel type by measuring emissions with each fuel type at each test point. You may accumulate service hours on a single emission-data engine using the type of fuel or the fuel mixture expected to have the highest combustion and exhaust temperatures; you may ask us to approve a different fuel mixture if you demonstrate that a different criterion is more appropriate.

(d) Calculate emission data using measurements to at least one more decimal place than the applicable standard. Apply the deterioration factor to the official emission result, as described in paragraph (c) of this section, then round the adjusted figure to the same number of decimal places as the emission standard. Compare the rounded emission levels to the emission standard for each emission-data engine.



(e) If you identify more than one configuration in § 1036.205(e), we may test (or require you to test) any of the identified configurations. We may also require you to provide an engineering analysis that demonstrates that untested configurations listed in § 1036.205(e) comply with their FCL.

**§ 1036.250 Reporting and recordkeeping for certification.**

(a) Within 90 days after the end of the model year, send the Designated Compliance Officer a report including the total U.S.-directed production volume of engines you produced in each engine family during the model year (based on information available at the time of the report). Report the production by serial number and engine configuration. Small manufacturers may omit this requirement. You may combine this report with reports required under subpart H of this part.

(b) Organize and maintain the following records:

(1) A copy of all applications and any summary information you send us.

(2) Any of the information we specify in § 1036.205 that you were not required to include in your application.

(c) Keep routine data from emission tests required by this part (such as test cell temperatures and relative humidity readings) for one year after we issue the associated certificate of conformity. Keep all other information specified in this section for eight years after we issue your certificate.

(d) Store these records in any format and on any media, as long as you can promptly send us organized, written records in English if we ask for them. You must keep these records readily available. We may review them at any time.

**§ 1036.255 What decisions may EPA make regarding my certificate of conformity?**

(a) If we determine your application is complete and shows that the engine family meets all the requirements of this part and the Act, we will issue a certificate of conformity for your engine family for that model year. We may make the approval subject to additional conditions.

(b) We may deny your application for certification if we determine that your engine family fails to comply with emission standards or other requirements of this part or the Clean Air Act. We will base our decision on all available information. If we deny your application, we will explain why in writing.

(c) In addition, we may deny your application or suspend or revoke your certificate if you do any of the following:

(1) Refuse to comply with any testing or reporting requirements.

(2) Submit false or incomplete information (paragraph (e) of this section applies if this is fraudulent). This includes doing anything after submission of your application to render any of the submitted information false or incomplete.

(3) Render inaccurate any test data.

(4) Deny us from completing authorized activities (see 40 CFR 1068.20). This includes a failure to provide reasonable assistance.

(5) Produce engines for importation into the United States at a location where local law prohibits us from carrying out authorized activities.

(6) Fail to supply requested information or amend your application to include all engines being produced.

(7) Take any action that otherwise circumvents the intent of the Act or this part, with respect to your engine family.

(d) We may void the certificate of conformity for an engine family if you fail to keep records, send reports, or give us information as required under this part or the Act. Note that these are also violations of 40 CFR 1068.101(a)(2).

(e) We may void your certificate if we find that you intentionally submitted false or incomplete information. This includes rendering submitted information false or incomplete after submission.

(f) If we deny your application or suspend, revoke, or void your certificate, you may ask for a hearing (see § 1036.820).

**Subpart D—Testing Production Engines**

**§ 1036.301 Measurements related to GEM inputs in a selective enforcement audit.**

(a) Selective enforcement audits apply for engines as specified in 40 CFR part 1068, subpart E. This section describes how this applies uniquely in certain circumstances.

(b) Selective enforcement audit provisions apply with respect to your fuel maps as follows:

(1) A selective enforcement audit for fuel maps would consist of performing measurements with production engines to determine the fuel-consumption rates at each of the specified points under the engine map as declared for GEM simulations, and running GEM over one or more applicable duty cycles based on those measured values, using GEM inputs that represent any applicable vehicle configuration for which the engine is being used. The engine is considered passing for a given configuration if the new modeled emission result for every applicable

duty cycle is at or below the modeled emission result corresponding to the declared GEM inputs.

(2) We may specify up to ten unique vehicle configurations for an audit to verify that an engine's fuel map is part of a complying certified engine configuration. If the audit includes fuel-map testing in conjunction with engine testing relative to exhaust emission standards, the fuel-map simulations for the whole set of vehicles and duty cycles counts as a single test result for purposes of evaluating whether the engine family meets the pass-fail criteria under 40 CFR 1068.420. If the audit includes only fuel-map testing, the fuel-map simulation for each vehicle configuration counts as a separate test for the engine.

(c) If your certification includes powertrain testing as specified in 40 CFR 1036.630, the selective enforcement audit provisions apply with respect to powertrain test results as specified in 40 CFR 1037.301 and 1037.550. We may allow manufacturers to instead perform the engine-based testing to simulate the powertrain test as specified in 40 CFR 1037.551.

(d) We may suspend or revoke certificates, based on the outcome of a selective enforcement audit, for any appropriate configurations within one or more engine families.

**Subpart E—In-Use Testing**

**§ 1036.401 In-use testing.**

We may perform in-use testing of any engine family subject to the standards of this part, consistent with the Clean Air Act and the provisions of § 1036.235. Note that this provision does not affect your obligation to test your in-use engines as described in 40 CFR part 86, subpart T.

**Subpart F—Test Procedures**

**§ 1036.501 How do I run a valid emission test?**

(a) Use the equipment and procedures specified in 40 CFR 86.1305 to determine whether engines meet the emission standards in § 1036.108. These same procedures apply for determining engine fuel maps and fuel consumption at idle as specified in § 1036.535. These procedures also apply for engine-based measurement procedures to simulate powertrain testing as specified in 40 CFR 1037.551.

(b) You may use special or alternate procedures to the extent we allow them under 40 CFR 1065.10.

(c) This subpart is addressed to you as a manufacturer, but it applies equally to anyone who does testing for you, and to us when we perform testing to



determine if your engines meet emission standards.

(d) For engines that use aftertreatment technology with infrequent regeneration events, apply infrequent regeneration adjustment factors as described in § 1036.530.

(e) Test hybrid engines as described in § 1036.525 and 40 CFR part 1065.

(f) Determine engine fuel maps and fuel consumption at idle as described in § 1036.535.

(g) The following additional provisions apply for testing to demonstrate compliance with the emission standards in § 1036.108 for model year 2021 and later engines:

(1) When calculating total engine work, exclude work during any portion of the duty cycle that has a zero reference value for normalized torque.

(2) If your engine is intended for installation in a vehicle equipped with stop-start technology, you may use good engineering judgment to turn the engine off during the idle portions of the duty cycle to represent in-use operation, consistent with good engineering judgment.

(3) Use continuous sampling (not batch sampling) to measure CO<sub>2</sub> emissions over the ramped-modal cycle specified in 40 CFR 86.1362. Integrate the test results by mode to establish separate emission rates for each mode (including the transition following each mode, as applicable). Apply the weighting factors specified in 40 CFR 86.1362 to calculate a composite emission result.

#### § 1036.525 Hybrid engines.

(a) If your engine system includes features that recover and store energy

during engine motoring operation, test the engine as described in paragraph (d) of this section. For purposes of this section, features that recover energy between the engine and transmission are considered related to engine motoring.

(b) If you produce a hybrid engine designed with power take-off capability and sell the engine coupled with a transmission, you may calculate a reduction in CO<sub>2</sub> emissions resulting from the power take-off operation as described in 40 CFR 1037.525. Use good engineering judgment to use the vehicle-based procedures to quantify the CO<sub>2</sub> reduction for your engines.

(c) The hardware that must be included in these tests is the engine, the hybrid electric motor, the rechargeable energy storage system (RESS) and the power electronics between the hybrid electric motor and the RESS. You may ask us to modify the provisions of this section to allow testing non-electric hybrid vehicles, consistent with good engineering judgment.

(d) Measure emissions using the same procedures that apply for testing non-hybrid engines under this part, except as specified otherwise in this part and/or 40 CFR part 1065. If you test hybrid engines using the ramped-modal cycle, deactivate the hybrid features unless we have specified otherwise. The five differences that apply under this section are related to engine mapping, engine shutdown during the test cycle, calculating work, limits on braking energy, and state of charge constraints.

(1) Map the engine as specified in 40 CFR 1065.510. This requires separate torque maps for the engine with and

without the hybrid features active. For transient testing, denormalize the test cycle using the map generated with the hybrid feature active. For steady-state testing, denormalize the test cycle using the map generated with the hybrid feature inactive.

(2) If the engine will be configured in actual use to shut down automatically during idle operation, you may let the engine shut down during the idle portions of the test cycle.

(3) Follow 40 CFR 1065.650(d) to calculate the work done over the cycle except as specified in this paragraph (d)(3). For the positive work over the cycle, set negative hybrid power to zero. For the negative work over the cycle set the positive power to zero and the set the non-hybrid power to zero.

(4) Calculate brake energy fraction,  $x_b$ , as follows:

(i) Calculate  $x_b$  as the integrated negative work over the cycle divided by the integrated positive work over the cycle according to Equation 1036.525-1. Calculate the brake energy limit for the engine,  $x_{bl}$ , according to Equation 1036.525-2. If  $x_b$  is less than  $x_{bl}$ , use the integrated positive work for your emission calculations. If  $x_b$  is greater than  $x_{bl}$  use Equation 1036.525-3 to calculate the positive work done over the cycle. Use  $W_{cycle}$  as the integrated positive work when calculating brake-specific emissions. To avoid the need to delete extra brake work from positive work you may set an instantaneous brake target that will prevent  $x_b$  from being larger than  $x_{bl}$ .

$$x_b = \left| \frac{W_{neg}}{W_{pos}} \right| \quad \text{Eq. 1036.525-1}$$

$$x_{bl} = 4.158 \cdot 10^{-4} \cdot P_{max} + 0.2247 \quad \text{Eq. 1036.525-2}$$

$$W_{cycle} = W_{pos} - \left( |W_{neg}| - x_{bl} \cdot W_{pos} \right) \quad \text{Eq. 1036.525-3}$$

(ii) The following definitions apply for this paragraph (d)(4):

$x_b$  = the brake energy fraction.

$W_{neg}$  = the negative work over the cycle.

$W_{pos}$  = the positive work over the cycle.

$x_{bl}$  = the brake energy fraction limit.

$P_{max}$  = the maximum power of the engine with the hybrid system engaged (kW).

$W_{cycle}$  = the work over the cycle when  $x_b$  is greater than  $x_{bl}$ .

(iii) Note that these calculations are specified with SI units (such as kW), consistent with 40 CFR part 1065. Emission results are converted to g/hp-hr at the end of the calculations.

(5) Correct for the net energy change of the energy storage device as described in 40 CFR 1066.501.

#### § 1036.530 Calculating greenhouse gas emission rates.

This section describes how to calculate official emission results for CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O.

(a) Calculate brake-specific emission rates for each applicable duty cycle as specified in 40 CFR 1065.650. Apply infrequent regeneration adjustment factors to your cycle-average results as described in 40 CFR 86.004–28 for CO<sub>2</sub> starting in model year 2021. You may optionally apply infrequent regeneration adjustment factors for CH<sub>4</sub> and N<sub>2</sub>O.

(b) Adjust CO<sub>2</sub> emission rates calculated under paragraph (a) of this section for measured test fuel properties as specified in this paragraph (b) to obtain the official emission results. You are not required to apply this adjustment for fuels containing at least 75 percent pure alcohol, such as E85. The purpose of this adjustment is to make official emission results independent of differences in test fuels

within a fuel type. Use good engineering judgment to develop and apply testing protocols to minimize the impact of variations in test fuels.

(1) Determine mass-specific net energy content,  $E_{\text{mfuelmeas}}$ , also known as lower heating value, in MJ/kg, expressed to at least three decimal places, as follows:

(i) For liquid fuels, determine  $E_{\text{mfuelmeas}}$  according to ASTM D4809 (recommended) or ASTM D240 (both incorporated by reference in § 1036.810).

(ii) For gaseous fuels, determine  $E_{\text{mfuelmeas}}$  using good engineering judgment.

(iii) If you determine based on good engineering judgment that your careful control of test fuel properties causes

variations in the actual mass-specific energy content and carbon mass fraction to be the same as or smaller than the repeatability of measuring those values, you may use constant values equal to the average values for your test fuel. If you use a constant value, you must update or verify the value at least once per year, or after changes in test fuel suppliers or specifications.

(2) Determine your test fuel's carbon mass fraction,  $w_C$  as described in 40 CFR 1065.655(d), expressed to at least three decimal places; however, you must measure fuel properties rather than using the default values specified in Table 1 of 40 CFR 1065.655.

(3) Correct measured CO<sub>2</sub> emission rates as follows:

$$e_{\text{CO2cor}} = e_{\text{CO2}} \cdot \frac{E_{\text{mfuelmeas}}}{E_{\text{mfuelCref}} \cdot w_{\text{Cmeas}}} \quad \text{Eq. 1036.530-1}$$

Where:

$e_{\text{CO2}}$  = the calculated CO<sub>2</sub> emission result.

$E_{\text{mfuelmeas}}$  = the mass-specific net energy content of the test fuel as determined by paragraph (b)(1) of this section.

$E_{\text{mfuelCref}}$  = the reference value of carbon-specific net energy content for the appropriate fuel, as determined in Table 1 of this section.

$w_{\text{Cmeas}}$  = carbon mass fraction of the test fuel as determined under paragraph (b)(2) of this section.

Example:

$$e_{\text{CO2}} = 630.0 \text{ g/hp}\cdot\text{hr}$$

$$E_{\text{mfuelmeas}} = 42.528 \text{ MJ/kg}$$

$$E_{\text{mfuelCref}} = 49.3112 \text{ MJ/kgC}$$

$$w_{\text{Cmeas}} = 0.870$$

$$e_{\text{CO2cor}} = 630.0 \cdot \frac{42.528}{49.3112 \cdot 0.870}$$

$$e_{\text{CO2cor}} = 624.5 \text{ g/hp}\cdot\text{hr}$$

TABLE 1 OF § 1036.530—REFERENCE FUEL PROPERTIES

Fuel Type <sup>a</sup>	Reference fuel carbon-mass-specific net energy content, $E_{\text{mfuelCref}}$ (MJ/kgC)	Reference fuel carbon mass fraction, $w_{\text{Cref}}$
Diesel fuel .....	49.3112	0.874

TABLE 1 OF § 1036.530—REFERENCE FUEL PROPERTIES—Continued

Fuel Type <sup>a</sup>	Reference fuel carbon-mass-specific net energy content, $E_{\text{mfuelCref}}$ (MJ/kgC)	Reference fuel carbon mass fraction, $w_{\text{Cref}}$
Gasoline .....	50.4742	0.846
Natural Gas .....	66.2910	0.750
LPG .....	56.5218	0.820
Dimethyl Ether ..	55.3886	0.521

<sup>a</sup> For fuels that are not listed, you must ask us to approve a reference fuel and its properties.

(c) Your official CO<sub>2</sub> emission result equals your calculated brake-specific emission rate multiplied by all applicable adjustment factors, other than the deterioration factor.

#### § 1036.535 Determining engine fuel maps and fuel consumption at idle.

This section describes procedures for determining an engine's fuel-consumption rate for model year 2021 and later vehicles. Note that vehicle manufacturers will generally use these values to demonstrate compliance with vehicle-based Phase 2 emission standards that rely on emission modeling using the GEM simulation tool, as described in 40 CFR 1037.510.

(a) *General test provisions.* Perform fuel mapping using the procedure described in paragraph (b) of this section to establish measured fuel-consumption rates at a range of engine speed and load settings. Measure fuel consumption at idle using the procedure

described in paragraph (c) of this section. Use these measured fuel-consumption values to declare fuel-consumption rates for certification as described in paragraph (d) of this section. Also measure NO<sub>x</sub> emissions (in g/s) during each of the specified sampling periods consistent with the data requirements 40 CFR part 86, subpart T. Perform emission measurements as described in 40 CFR 1065.530 for discrete-mode steady-state testing. Control engine speed and torque to within ±20 rpm and ±20 N·m, or 20 percent of the speed and torque setpoint, whichever is greater. This section uses engine parameters and variables that are consistent with 40 CFR part 1065. For molar mass values, see 40 CFR 1065.1005.

(b) *Steady-state fuel mapping.* Determine fuel-consumption rates for each engine configuration over a series of steady-state engine operating points as described in this paragraph (b). You may use shared data across an engine platform to the extent that the fuel-consumption rates remain valid. For example, if you test a high-output configuration and create a different configuration that uses the same fueling strategy but limits the engine operation to be a subset of that from the high-output configuration, you may use the fuel-consumption rates for the reduced number of mapped points for the low-output configuration, as long as the narrower map includes at least 100 points. Perform fuel mapping as follows:

(1) Select 13 speed points that include warm idle speed,  $f_{\text{idle}}$ , the highest speed above maximum power at which 70% of

maximum power occurs,  $n_{hi}$ , and 11 equally spaced points between  $f_{idle}$  and  $n_{hi}$ . If operating the engine at the specified speeds causes unstable engine operation due to operating on the low or high speed governor you may adjust the speed setpoint for those points as needed. Typically this would only happen at  $f_{idle}$  above zero torque and  $n_{hi}$  at 100% torque.  $f_{idle}$  and zero torque must be one of the test points.

(2) Select 11 normalized torque values at each of the speed points determined in paragraph (b)(1) of this section, including  $T = 0$ , maximum mapped torque,  $T_{max \text{ mapped}}$ , and 9 equally spaced points between  $T = 0$  and  $T_{max \text{ mapped}}$ . Normalized torque values are expressed as a percentage of  $T_{max \text{ mapped}}$  at a given engine speed.

(3) Warm up the engine as described in 40 CFR 1065.510(b)(2).

(4) Within 60 seconds after concluding the warm-up procedure, operate the engine at  $f_{ntest}$  and the highest torque value,  $T_{max}$ , at that speed.

(5) After the engine operates at the set speed and torque for 60 seconds, start

recording measurements using one of the following methods:

(i) *Carbon mass balance*. Record speed and torque and measure emissions of CO<sub>2</sub>, CO, NMHC, and CH<sub>4</sub> for (29 to 31) seconds and determine the corresponding mean values for the sampling period.

(ii) *Direct measurement of fuel flow*. Record speed and torque and measure fuel consumption with a fuel flow meter for (29 to 31) seconds and determine the corresponding mean values for the sampling period.

(6) Within 15 seconds after completing the sampling period described in paragraph (b)(5) of this section, set the engine to operate at the next lowest torque value while holding speed constant. Perform the measurements described at the new torque setting and repeat this sequence for all remaining torque values down to  $T = 0$ .

(7) Continue testing to complete fuel mapping as follows:

(i) Within 15 seconds after sampling at  $T = 0$ , set the engine to operate at the

next lowest speed value and increase torque to  $T_{max}$ . Perform measurements for all the torque values at the selected speed as described in paragraphs (b)(5) and (6) of this section. Repeat this sequence for all remaining speed values down to  $f_{idle}$  to complete the fuel-mapping procedure. You may interrupt the mapping sequence to calibrate emission-measurement instrumentation only during stabilization at  $T_{max}$  for a given speed.

(ii) If an infrequent regeneration event occurs during fuel mapping, invalidate all the measurements made at that engine speed. Allow the regeneration event to finish, then restart engine stabilization at  $T_{max}$  at the same engine speed and continue with measurements from that point in the fuel-mapping sequence.

(8) If you determine fuel-consumption rates using emission measurements from the raw or diluted exhaust, calculate the mean fuel mass flow rate, for each point in the fuel map using the following equation:

$$\bar{m}_{fuel} = \frac{M_C}{w_{Cmeas}} \cdot \left( \bar{n}_{exh} \cdot \frac{\bar{x}_{Ccombdry}}{1 + \bar{x}_{H_2Oexhdry}} - \frac{\bar{m}_{CO_2urea}}{M_{CO_2}} \right) \quad \text{Eq. 1036.535-1}$$

Where:

$\bar{m}_{fuel}$  = mean fuel mass flow rate for a given fuel map setpoint, expressed to at least the nearest 0.001 g/s.

$M_C$  = molar mass of carbon.

$w_{Cmeas}$  = carbon mass fraction of fuel as determined by 40 CFR 1065.655(d), except that you may not use the default properties in Table 1 of 40 CFR 1065.655

to determine  $\alpha$ ,  $\beta$ , and  $w_C$  for liquid fuels.

$\bar{n}_{exh}$  = the mean raw exhaust molar flow rate from which you measured emissions according to 40 CFR 1065.655.

$\bar{x}_{Ccombdry}$  = the mean concentration of carbon from fuel in the exhaust per mole of dry exhaust.

$\bar{x}_{H_2Oexhdry}$  = the mean concentration of H<sub>2</sub>O in exhaust per mole of dry exhaust.

$\bar{m}_{CO_2urea}$  = the mean CO<sub>2</sub> mass emission rate from urea decomposition as described in paragraph (b)(9) of this section. If your engine does not utilize urea SCR for emission control, or if you choose not to perform this correction, set  $\bar{m}_{CO_2urea}$  equal to 0.

$M_{CO_2}$  = molar mass of carbon dioxide.

*Example:*

$$\bar{m}_{fuel} = \frac{12.0107}{0.869} \cdot \left( 25.534 \cdot \frac{0.002805}{1 + 0.0353} - \frac{0.0726}{44.0095} \right) = 0.933 \text{ g/s}$$

(9) If you determine fuel-consumption rates using emission measurements with engines that have urea SCR for NO<sub>x</sub> control, you may

correct for the mean CO<sub>2</sub> emissions coming from urea decomposition,  $\bar{m}_{CO_2urea}$ , at each

fuel map setpoint using the following equation:

$$\bar{m}_{CO_2urea} = \bar{m}_{urea} \cdot \frac{M_{CO_2} \cdot MF_{CH_4N_2O}}{M_{CH_4N_2O}} \quad \text{Eq. 1036.535-2}$$

Where:

$\bar{m}_{urea}$  = the mean mass flow rate of injected urea solution for a given sampling period.

$M_{CO_2}$  = molar mass of carbon dioxide.

$MF_{CH_4N_2O}$  = mass fraction of urea in aqueous solution. Note that the subscript "CH<sub>4</sub>N<sub>2</sub>O" refers to urea as a pure compound and the subscript "urea" refers to the aqueous urea solution.

$M_{CH_4N_2O}$  = molar mass of urea.

*Example:*

$\bar{m}_{urea} = 0.304 \text{ g/s}$

$M_{CO_2} = 44.0095 \text{ g/mol}$

$MF_{CH_4N_2O} = 32.5\% = 0.325$

$M_{CH_4N_2O} = 60.05526 \text{ g/mol}$

$$\bar{m}_{\text{CO}_2\text{urea}} = 0.304 \cdot \frac{44.0095 \cdot 0.325}{60.05526} = 0.0726 \text{ g/s}$$

(10) For all fuels except those that have at least 75% pure alcohol, correct the measured or calculated mean fuel

mass flow rate,  $\bar{m}_{\text{fuel}}$  at each engine operating condition to a mass-specific net energy content of a reference fuel

using the following equation and the values specified in Table 1 of § 1036.530:

$$\bar{m}_{\text{fuelcor}} = \bar{m}_{\text{fuel}} \cdot \frac{E_{\text{mfuelmeas}} \cdot w_{\text{Cref}}}{E_{\text{mfuelCref}}} \quad \text{Eq. 1036.535-3}$$

*Example:*  
 $\bar{m}_{\text{fuel}} = 0.933 \text{ g/s}$

$E_{\text{mfuelmeas}} = 42.7984 \text{ MJ/kgC}$   
 $w_{\text{Cref}} = 0.874$

$E_{\text{mfuelCref}} = 49.3112 \text{ MJ/kgC}$

$$\bar{m}_{\text{fuel}} = 0.933 \cdot \frac{42.7984 \cdot 0.874}{49.3112} = 0.708 \text{ g/s}$$

(c) *Fuel consumption at idle.*

Determine values for fuel-consumption rate at idle for each engine configuration as described in this paragraph (c). You may use shared data across engine configurations, consistent with good engineering judgment. Perform measurements as follows:

(1) Warm up the engine as described in 40 CFR 1065.510(b)(2).

(2) Within 60 seconds after concluding the warm-up procedure, operate the engine at its minimum

declared warm idle speed,  $f_{\text{idlemin}}$ , as described in 40 CFR 1065.510(b)(3), set zero torque, and start the sampling period. Continue sampling for (595 to 605) seconds. Perform measurements using one of the following methods during the sampling period:

(i) *Carbon mass balance.* Record speed and torque and measure emissions of CO<sub>2</sub>, CO, NMHC, and CH<sub>4</sub> and determine the corresponding mean values for the sampling period. Calculate the mean fuel mass flow rate,

$\bar{m}_{\text{fuel}}$ , during the sampling period as described in paragraph (b)(8) of this section.

(ii) *Direct measurement of fuel flow.* Record speed and torque and measure fuel consumption with a fuel flow meter and determine the corresponding mean values for the sampling period.

(3) Repeat the steps in paragraphs (c)(1) and (2) of this section with the engine set to operate at idle torque,  $T_{\text{idle}}$ . Determine  $T_{\text{idle}}$  using the following equation:

$$T_{\text{idle}} = \frac{T_{\text{finstall}} \cdot f_{\text{fnidle}}^2}{f_{\text{finstall}}^2} + \frac{P_{\text{acc}}}{f_{\text{fnidle}}} \quad \text{Eq. 1036.535-2}$$

Where:

$T_{\text{finstall}}$  = the maximum engine torque at  $f_{\text{finstall}}$ .  
 $f_{\text{fnidle}}$  = the applicable engine idle speed as described in this paragraph (c).

$f_{\text{finstall}}$  = the stall speed of the torque converter; use  $f_{\text{fntest}}$  or 2250 rpm, whichever is lower.  
 $P_{\text{acc}}$  = accessory power for the vehicle class; use 1300 W.

*Example:*

$f_{\text{fntest}} = 1740.8 \text{ rpm} = 182.30 \text{ rad/s}$   
 $f_{\text{finstall}} = 1740.8 \text{ rpm} = 182.30 \text{ rad/s}$   
 $T_{\text{finstall}} = 1870 \text{ N}\cdot\text{m}$   
 $P_{\text{acc}} = 1300 \text{ W}$   
 $f_{\text{fnidle}} = 600 \text{ rpm} = 62.83 \text{ rad/s}$

$$T_{\text{idle}} = \frac{1870 \cdot 62.83^2}{182.30^2} + \frac{1300}{62.83} = 242.84 \text{ N}\cdot\text{m}$$

(4) Repeat the steps in paragraphs (c)(1) through (3) of this section with the engine operated at its declared maximum warm idle speed,  $f_{\text{idlemax}}$ .

(5) If an infrequent regeneration event occurs during this procedure, invalidate any measurements made at that idle condition. Allow the regeneration event to finish, then repeat the measurement and continue with the test sequence.

(6) Correct the measured or calculated mean fuel mass flow rate,  $\bar{m}_{\text{fuel}}$  at each of the four idle settings to account for mass-specific net energy content as

described in paragraph (b)(10) of this section.

(d) *Measured vs. declared fuel-consumption rates.* Select fuel-consumption rates (g/s) to characterize the engine's fuel map and fuel-consumption rate at idle. These declared values may not be lower than any corresponding measured values determined in paragraphs (b) and (c) of this section. You may select any value that is at or above the corresponding measured value. Use good engineering judgment to select values that will be at

or below the fuel-consumption rates for your production engines. These declared fuel-consumption rates are the values that vehicle manufacturers will use for certification. Note that production engines are subject to GEM cycle-weighted limits as described in § 1036.301.

## Subpart G—Special Compliance Provisions

### § 1036.601 What compliance provisions apply?

(a) Engine and vehicle manufacturers, as well as owners, operators, and rebuilders of engines subject to the requirements of this part, and all other persons, must observe the provisions of this part, the provisions of 40 CFR part 1068, and the provisions of the Clean Air Act. The provisions of 40 CFR part 1068 apply for heavy-duty highway engines as specified in that part, subject to the following provisions:

(1) The hardship exemption provisions of 40 CFR 1068.245, 1068.250, and 1068.255 do not apply for motor vehicle engines.

(2) The provisions of 40 CFR 1068.235 that allow for modifying certified engines for competition do not apply for heavy-duty vehicles or heavy-duty engines. Certified motor vehicles and motor vehicle engines and their emission control devices must remain in their certified configuration even if they are used solely for competition or if they become nonroad vehicles or engines; anyone modifying a certified motor vehicle or motor vehicle engine for any reason is subject to the tampering and defeat device prohibitions of 40 CFR 1068.101(b) and 42 U.S.C. 7522(a)(3). Note that a new engine that will be installed in a vehicle that will be used solely for competition may be excluded from the requirements of this part based on a determination that the vehicle is not a motor vehicle under 40 CFR 85.1703.

(3) The tampering prohibition in 40 CFR 1068.101(b)(1) applies for alternative fuel conversions as specified in 40 CFR part 85, subpart F.

(4) The warranty-related prohibitions in section 203(a)(4) of the Act (42 U.S.C. 7522(a)(4)) apply to manufacturers of new heavy-duty highway engines in addition to the prohibitions described in 40 CFR 1068.101(b)(6). We may assess a civil penalty up to \$37,500 for each engine or vehicle in violation.

(b) Engines exempted from the applicable standards of 40 CFR part 86 are exempt from the standards of this part without request.

(c) The emergency vehicle field modification provisions of 40 CFR 85.1716 apply with respect to the standards of this part.

(d) Subpart C of this part describes how to test and certify dual-fuel and flexible-fuel engines. Some multi-fuel engines may not fit either of those defined terms. For such engines, we will determine whether it is most appropriate to treat them as single-fuel

engines, dual-fuel engines, or flexible-fuel engines based on the range of possible and expected fuel mixtures. For example, an engine might burn natural gas but initiate combustion with a pilot injection of diesel fuel. If the engine is designed to operate with a single fueling algorithm (*i.e.*, fueling rates are fixed at a given engine speed and load condition), we would generally treat it as a single-fuel engine. In this context, the combination of diesel fuel and natural gas would be its own fuel type. If the engine is designed to also operate on diesel fuel alone, we would generally treat it as a dual-fueled engine. If the engine is designed to operate on varying mixtures of the two fuels, we would generally treat it as a flexible-fueled engine. To the extent that requirements vary for the different fuels or fuel mixtures, we may apply the more stringent requirements.

### § 1036.610 Off-cycle technology credits and adjustments for reducing greenhouse gas emissions.

(a) You may ask us to apply the provisions of this section for CO<sub>2</sub> emission reductions resulting from powertrain technologies that were not in common use with heavy-duty vehicles before model year 2010 that are not reflected in the specified test procedure. We will apply these provisions only for technologies that will result in a measurable, demonstrable, and verifiable real-world CO<sub>2</sub> reduction. Note that prior to MY 2016, these technologies were referred to as “innovative technologies”.

(b) The provisions of this section may be applied as either an improvement factor (used to adjust emission results) or as a separate credit within the engine family, consistent with good engineering judgment. Note that the term “credit” in this section describes an additive adjustment to emission rates and is not equivalent to an emission credit in the ABT program of subpart H of this part. We recommend that you base your credit/adjustment on A to B testing of pairs of engines/vehicles differing only with respect to the technology in question.

(1) Calculate improvement factors as the ratio of in-use emissions with the technology divided by the in-use emissions without the technology. Adjust the emission results by multiplying by the improvement factor. Use the improvement-factor approach where good engineering judgment indicates that the actual benefit will be proportional to emissions measured over the test procedures specified in this part. For example, the benefits from technologies that reduce engine

operation would generally be proportional to the engine’s emission rate.

(2) Calculate separate credits based on the difference between the in-use emission rate (g/ton-mile) with the technology and the in-use emission rate without the technology. Subtract this value from your measured emission result and use this adjusted value to determine your FEL. We may also allow you to calculate the credits based on g/hp-hr emission rates. Use the separate-credit approach where good engineering judgment indicates that the actual benefit will not be proportional to emissions measured over the test procedures specified in this part.

(3) We may require you to discount or otherwise adjust your improvement factor or credit to account for uncertainty or other relevant factors.

(c) Send your request to the Designated Compliance Officer. We recommend that you do not begin collecting test data (for submission to EPA) before contacting us. For technologies for which the vehicle manufacturer could also claim credits (such as transmissions in certain circumstances), we may require you to include a letter from the vehicle manufacturer stating that it will not seek credits for the same technology. Your request must contain the following items:

(1) A detailed description of the off-cycle technology and how it functions to reduce CO<sub>2</sub> emissions under conditions not represented on the duty cycles required for certification.

(2) A list of the engine configurations that will be equipped with the technology.

(3) A detailed description and justification of the selected test engines.

(4) All testing and simulation data required under this section, plus any other data you have considered in your analysis. You may ask for our preliminary approval of your test plan under § 1036.210.

(5) A complete description of the methodology used to estimate the off-cycle benefit of the technology and all supporting data, including engine testing and in-use activity data. Also include a statement regarding your recommendation for applying the provisions of this section for the given technology as an improvement factor or a credit.

(6) An estimate of the off-cycle benefit by engine model, and the fleetwide benefit based on projected sales of engine models equipped with the technology.

(7) A demonstration of the in-use durability of the off-cycle technology,

based on any available engineering analysis or durability testing data (either by testing components or whole engines).

(d) We may seek public comment on your request, consistent with the provisions of 40 CFR 86.1869–12(d). However, we will generally not seek public comment on credits/adjustments based on A to B engine dynamometer testing, chassis testing, or in-use testing.

(e) We may approve an improvement factor or credit for any engine family that is properly represented by your testing. You may similarly continue to use an approved improvement factor or credit for any appropriate engine families in future model years through 2020. Starting in model year 2021, you must request our approval before applying an improvement factor or credit under this section for any kind of technology, even if we approved an improvement factor or credit for similar engine models before model year 2021.

#### **§ 1036.615 Engines with Rankine cycle waste heat recovery and hybrid powertrains.**

This section specifies how to generate advanced technology-specific emission credits for hybrid powertrains that include energy storage systems and regenerative braking (including regenerative engine braking) and for engines that include Rankine-cycle (or other bottoming cycle) exhaust energy recovery systems. This section applies only for model year 2020 and earlier engines.

(a) *Pre-transmission hybrid powertrains.* Test pre-transmission hybrid powertrains with the hybrid engine test procedures of 40 CFR part 1065 or with the post-transmission test procedures in 40 CFR 1037.550. Pre-transmission hybrid powertrains are those engine systems that include features to recover and store energy during engine motoring operation but not from the vehicle's wheels.

(b) *Rankine engines.* Test engines that include Rankine-cycle exhaust energy recovery systems according to the test procedures specified in subpart F of this part unless we approve alternate procedures.

(c) *Calculating credits.* Calculate credits as specified in subpart H of this part. Credits generated from engines and powertrains certified under this section may be used in other averaging sets as described in § 1036.740(c).

(d) *Off-cycle technologies.* You may certify using both the provisions of this section and the off-cycle technology provisions of § 1036.610, provided you do not double-count emission benefits.

#### **§ 1036.620 Alternate CO<sub>2</sub> standards based on model year 2011 compression-ignition engines.**

For model years 2014 through 2016, you may certify your compression-ignition engines to the CO<sub>2</sub> standards of this section instead of the CO<sub>2</sub> standards in § 1036.108. However, you may not certify engines to these alternate standards if they are part of an averaging set in which you carry a balance of banked credits. You may submit applications for certifications before using up banked credits in the averaging set, but such certificates will not become effective until you have used up (or retired) your banked credits in the averaging set. For purposes of this section, you are deemed to carry credits in an averaging set if you carry credits from advanced technology that are allowed to be used in that averaging set.

(a) The standards of this section are determined from the measured emission rate of the test engine of the applicable baseline 2011 engine family(ies) as described in paragraphs (b) and (c) of this section. Calculate the CO<sub>2</sub> emission rate of the baseline test engine using the same equations used for showing compliance with the otherwise applicable standard. The alternate CO<sub>2</sub> standard for light and medium heavy-duty vocational-certified engines (certified for CO<sub>2</sub> using the transient cycle) is equal to the baseline emission rate multiplied by 0.975. The alternate CO<sub>2</sub> standard for tractor-certified engines (certified for CO<sub>2</sub> using the ramped-modal cycle) and all other heavy heavy-duty engines is equal to the baseline emission rate multiplied by 0.970. The in-use FEL for these engines is equal to the alternate standard multiplied by 1.03.

(b) This paragraph (b) applies if you do not certify all your engine families in the averaging set to the alternate standards of this section. Identify separate baseline engine families for each engine family that you are certifying to the alternate standards of this section. For an engine family to be considered the baseline engine family, it must meet the following criteria:

(1) It must have been certified to all applicable emission standards in model year 2011. If the baseline engine was certified to a NO<sub>x</sub> FEL above the standard and incorporated the same emission control technologies as the new engine family, you may adjust the baseline CO<sub>2</sub> emission rate to be equivalent to an engine meeting the 0.20 g/hp-hr NO<sub>x</sub> standard (or your higher FEL as specified in this paragraph (b)(1)), using certification results from model years 2009 through 2011,

consistent with good engineering judgment.

(i) Use the following equation to relate model year 2009–2011 NO<sub>x</sub> and CO<sub>2</sub> emission rates (g/hp-hr):  $CO_2 = a \times \log(NO_x) + b$ .

(ii) For model year 2014–2016 engines certified to NO<sub>x</sub> FELs above 0.20 g/hp-hr, correct the baseline CO<sub>2</sub> emissions to the actual NO<sub>x</sub> FELs of the 2014–2016 engines.

(iii) Calculate separate adjustments for emissions over the ramped-modal cycle and the transient cycle.

(2) The baseline configuration tested for certification must have the same engine displacement as the engines in the engine family being certified to the alternate standards, and its rated power must be within five percent of the highest rated power in the engine family being certified to the alternate standards.

(3) The model year 2011 U.S.-directed production volume of the configuration tested must be at least one percent of the total 2011 U.S.-directed production volume for the engine family.

(4) The tested configuration must have cycle-weighted BSFC equivalent to or better than all other configurations in the engine family.

(c) This paragraph (c) applies if you certify all your engine families in the primary intended service class to the alternate standards of this section. For purposes of this section, you may combine light heavy-duty and medium heavy-duty engines into a single averaging set. Determine your baseline CO<sub>2</sub> emission rate as the production-weighted emission rate of the certified engine families you produced in the 2011 model year. If you produce engines for both tractors and vocational vehicles, treat them as separate averaging sets. Adjust the CO<sub>2</sub> emission rates to be equivalent to an engine meeting the average NO<sub>x</sub> FEL of new engines (assuming engines certified to the 0.20 g/hp-hr NO<sub>x</sub> standard have a NO<sub>x</sub> FEL equal to 0.20 g/hp-hr), as described in paragraph (b)(1) of this section.

(d) Include the following statement on the emission control information label: "THIS ENGINE WAS CERTIFIED TO AN ALTERNATE CO<sub>2</sub> STANDARD UNDER § 1036.620."

(e) You may not bank CO<sub>2</sub> emission credits for any engine family in the same averaging set and model year in which you certify engines to the standards of this section. You may not bank any advanced technology credits in any averaging set for the model year you certify under this section (since such credits would be available for use in this averaging set). Note that the

provisions of § 1036.745 apply for deficits generated with respect to the standards of this section.

(f) You need our approval before you may certify engines under this section, especially with respect to the numerical value of the alternate standards. We will not approve your request if we determine that you manipulated your engine families or test engine configurations to certify to less stringent standards, or that you otherwise have not acted in good faith. You must keep and provide to us any information we need to determine that your engine families meet the requirements of this section. Keep these records for at least five years after you stop producing engines certified under this section.

**§ 1036.625 In-use compliance with family emission limits (FELs).**

Section 1036.225 describes how to change the FEL for an engine family during the model year. This section, which describes how you may ask us to increase an engine family's FEL after the end of the model year, is intended to address circumstances in which it is in the public interest to apply a higher in-use FEL based on forfeiting an appropriate number of emission credits.

(a) You may ask us to increase an engine family's FEL after the end of the model year if you believe some of your in-use engines exceed the CO<sub>2</sub> FEL that applied during the model year (or the CO<sub>2</sub> emission standard if the family did not generate or use emission credits). We may consider any available information in making our decision to approve or deny your request.

(b) If we approve your request under this section, you must apply emission credits to cover the increased FEL for all affected engines. Apply the emission credits as part of your credit demonstration for the current production year. Include the appropriate calculations in your final report under § 1036.730.

(c) Submit your request to the Designated Compliance Officer. Include the following in your request:

(1) Identify the names of each engine family that is the subject of your request. Include separate family names for different model years

(2) Describe why your request does not apply for similar engine models or additional model years, as applicable.

(3) Identify the FEL(s) that applied during the model year and recommend a replacement FEL for in-use engines; include a supporting rationale to describe how you determined the recommended replacement FEL.

(4) Describe whether the needed emission credits will come from averaging, banking, or trading.

(d) If we approve your request, we will identify the replacement FEL. The value we select will reflect our best judgment to accurately reflect the actual in-use performance of your engines, consistent with the testing provisions specified in this part. We may apply the higher FELs to other engine families from the same or different model years to the extent they used equivalent emission controls. We may include any appropriate conditions with our approval.

(e) If we order a recall for an engine family under 40 CFR 1068.505, we will no longer approve a replacement FEL under this section for any of your engines from that engine family, or from any other engine family that relies on equivalent emission controls.

**§ 1036.630 Certification of engine GHG emissions for powertrain testing.**

For engines included in powertrain families under 40 CFR part 1037, you may choose to include the corresponding engine emissions in your engine families under this part 1036.

(a) If you choose to include engine emissions in an engine family, the declared powertrain emission levels become standards that apply for selective enforcement audits and in-use testing. We may require that you provide the engine test cycle (not normalized) corresponding to a given powertrain for each of the specified duty cycles.

(b) If you choose to certify only fuel map emissions for an engine family and to not certify emissions over powertrain test cycles under 40 CFR 1037.550, we will not presume you are responsible for emissions over the powertrain cycles. However, where we determine that you are responsible in whole or in part for the emission exceedance in such cases, we may require that you participate in any recall of the affected vehicles. Note that this provision does not apply if you also hold the certificate of conformity for the vehicle.

**Subpart H—Averaging, Banking, and Trading for Certification**

**§ 1036.701 General provisions.**

(a) You may average, bank, and trade (ABT) emission credits for purposes of certification as described in this subpart and in subpart B of this part to show compliance with the standards of § 1036.108. Participation in this program is voluntary. (**Note:** As described in subpart B of this part, you must assign an FCL to all engine

families, whether or not they participate in the ABT provisions of this subpart.)

(b) The definitions of subpart I of this part apply to this subpart. The following definitions also apply:

(1) *Actual emission credits* means emission credits you have generated that we have verified by reviewing your final report.

(2) *Averaging set* means a set of engines in which emission credits may be exchanged. Credits generated by one engine may only be used by other engines in the same averaging set. See § 1036.740.

(3) *Broker* means any entity that facilitates a trade of emission credits between a buyer and seller.

(4) *Buyer* means the entity that receives emission credits as a result of a trade.

(5) *Reserved emission credits* means emission credits you have generated that we have not yet verified by reviewing your final report.

(6) *Seller* means the entity that provides emission credits during a trade.

(7) *Standard* means the emission standard that applies under subpart B of this part for engines not participating in the ABT program of this subpart.

(8) *Trade* means to exchange emission credits, either as a buyer or seller.

(c) Emission credits may be exchanged only within an averaging set as specified in § 1036.740.

(d) You may not use emission credits generated under this subpart to offset any emissions that exceed an FCL or standard. This applies for all testing, including certification testing, in-use testing, selective enforcement audits, and other production-line testing. However, if emissions from an engine exceed an FCL or standard (for example, during a selective enforcement audit), you may use emission credits to recertify the engine family with a higher FCL that applies only to future production.

(e) You may use either of the following approaches to retire or forego emission credits:

(1) You may retire emission credits generated from any number of your engines. This may be considered donating emission credits to the environment. Identify any such credits in the reports described in § 1036.730. Engines must comply with the applicable FELs even if you donate or sell the corresponding emission credits under this paragraph (h). Those credits may no longer be used by anyone to demonstrate compliance with any EPA emission standards.

(2) You may certify an engine family using an FEL (FCL for CO<sub>2</sub>) below the

emission standard as described in this part and choose not to generate emission credits for that family. If you do this, you do not need to calculate emission credits for those engine families and you do not need to submit or keep the associated records described in this subpart for that family.

(f) Emission credits may be used in the model year they are generated. Surplus emission credits may be banked for future model years. Surplus emission credits may sometimes be used for past model years, as described in § 1036.745.

(g) You may increase or decrease an FCL during the model year by amending your application for certification under § 1036.225. The new FCL may apply only to engines you have not already introduced into commerce.

(h) See § 1036.740 for special credit provisions that apply for greenhouse gas credits generated under 40 CFR 86.1819–14(k)(7) or § 1036.615 or 40 CFR 1037.615.

(i) Unless the regulations explicitly allow it, you may not calculate credits more than once for any emission reduction. For example, if you generate CO<sub>2</sub> emission credits for a hybrid engine under this part for a given vehicle, no one may generate CO<sub>2</sub> emission credits for that same hybrid engine and vehicle under 40 CFR part 1037. However, credits could be generated for identical vehicles using engines that did not generate credits under this part.

(j) You may use emission credits generated in one model year without adjustment for certifying vehicles in a later model year, even if emission standards are different.

(k) Engine families you certify with a nonconformance penalty under 40 CFR part 86, subpart L, may not generate emission credits.

#### **§ 1036.705 Generating and calculating emission credits.**

(a) The provisions of this section apply separately for calculating emission credits for each pollutant.

(b) For each participating family, calculate positive or negative emission credits relative to the otherwise applicable emission standard based on the engine family's FCL for greenhouse gases. If your engine family is certified to both the vocational and tractor engine standards, calculate credits separately for the vocational engines and the tractor engines (as specified in paragraph (b)(3) of this section). Calculate positive emission credits for a family that has an FCL below the standard. Calculate negative emission credits for a family that has an FCL above the standard. Sum your positive

and negative credits for the model year before rounding. Round the sum of emission credits to the nearest megagram (Mg), using consistent units throughout the following equations:

(1) For vocational engines:

$$\text{Emission credits (Mg)} = (\text{Std} - \text{FCL}) \cdot (\text{CF}) \cdot (\text{Volume}) \cdot (\text{UL}) \cdot (10^{-6})$$

Where:

Std = the emission standard, in g/hp-hr, that applies under subpart B of this part for engines not participating in the ABT program of this subpart (the "otherwise applicable standard").

FCL = the Family Certification Level for the engine family, in g/hp-hr, measured over the transient duty cycle, rounded to the same number of decimal places as the emission standard.

CF = a transient cycle conversion factor (hp-hr/mile), calculated by dividing the total (integrated) horsepower-hour over the duty cycle (average of vocational engine configurations weighted by their production volumes) by 6.3 miles for spark-ignition engines and 6.5 miles for compression-ignition engines. This represents the average work performed by vocational engines in the family over the mileage represented by operation over the duty cycle.

Volume = the number of vocational engines eligible to participate in the averaging, banking, and trading program within the given engine family during the model year, as described in paragraph (c) of this section.

UL = the useful life for the given engine family, in miles.

(2) For tractor engines:

$$\text{Emission credits (Mg)} = (\text{Std} - \text{FCL}) \cdot (\text{CF}) \cdot (\text{Volume}) \cdot (\text{UL}) \cdot (10^{-6})$$

Where:

Std = the emission standard, in g/hp-hr, that applies under subpart B of this part for engines not participating in the ABT program of this subpart (the "otherwise applicable standard").

FCL = the Family Certification Level for the engine family, in g/hp-hr, measured over the ramped-modal cycle rounded to the same number of decimal places as the emission standard.

CF = a transient cycle conversion factor (hp-hr/mile), calculated by dividing the total (integrated) horsepower-hour over the duty cycle (average of tractor-engine configurations weighted by their production volumes) by 6.3 miles for spark-ignition engines and 6.5 miles for compression-ignition engines. This represents the average work performed by tractor engines in the family over the mileage represented by operation over the duty cycle. Note that this calculation requires you to use the transient cycle conversion factor even for engines certified to standards based on the ramped-modal cycle.

Volume = the number of tractor engines eligible to participate in the averaging, banking, and trading program within the given engine family during the model

year, as described in paragraph (c) of this section.

UL = the useful life for the given engine family, in miles.

(3) For engine families certified to both the vocational and tractor engine standards, we may allow you to use statistical methods to estimate the total production volumes where a small fraction of the engines cannot be tracked precisely.

(4) You may not generate emission credits for tractor engines (*i.e.*, engines not certified to the transient cycle for CO<sub>2</sub>) installed in vocational vehicles (including vocational tractors certified pursuant to 40 CFR 1037.630 or exempted pursuant to 40 CFR 1037.631). We will waive this requirement where you demonstrate that less than five percent of the engines in your tractor family were installed in vocational vehicles. For example, if you know that 96 percent of your tractor engines were installed in non-vocational tractors, but cannot determine the vehicle type for the remaining four percent, you may generate credits for all the engines in the family.

(c) As described in § 1036.730, compliance with the requirements of this subpart is determined at the end of the model year based on actual U.S.-directed production volumes. Keep appropriate records to document these production volumes. Do not include any of the following engines to calculate emission credits:

(1) Engines that you do not certify to the CO<sub>2</sub> standards of this part because they are permanently exempted under subpart G of this part or under 40 CFR part 1068.

(2) Exported engines.

(3) Engines not subject to the requirements of this part, such as those excluded under § 1036.5. For example, do not include engines used in vehicles certified to the greenhouse gas standards of 40 CFR 86.1819.

(4) Any other engines if we indicate elsewhere in this part 1036 that they are not to be included in the calculations of this subpart.

(d) You may use CO<sub>2</sub> emission credits to show compliance with CH<sub>4</sub> and/or N<sub>2</sub>O FELs instead of the otherwise applicable emission standards. To do this, calculate the CH<sub>4</sub> and/or N<sub>2</sub>O emission credits needed (negative credits) using the equation in paragraph (b) of this section, using the FEL(s) you specify for your engines during certification instead of the FCL. You must use 25 Mg of positive CO<sub>2</sub> credits to offset 1 Mg of negative CH<sub>4</sub> credits. You must use 298 Mg of positive CO<sub>2</sub> credits to offset 1 Mg of negative N<sub>2</sub>O credits.



**§ 1036.710 Averaging.**

(a) Averaging is the exchange of emission credits among your engine families. You may average emission credits only within the same averaging set.

(b) You may certify one or more engine families to an FCL above the applicable standard, subject to any applicable FEL caps and other the provisions in subpart B of this part, if you show in your application for certification that your projected balance of all emission-credit transactions in that model year is greater than or equal to zero, or that a negative balance is allowed under § 1036.745.

(c) If you certify an engine family to an FCL that exceeds the otherwise applicable standard, you must obtain enough emission credits to offset the engine family's deficit by the due date for the final report required in § 1036.730. The emission credits used to address the deficit may come from your other engine families that generate emission credits in the same model year (or from later model years as specified in § 1036.745), from emission credits you have banked, or from emission credits you obtain through trading.

**§ 1036.715 Banking.**

(a) Banking is the retention of surplus emission credits by the manufacturer generating the emission credits for use in future model years for averaging or trading.

(b) You may designate any emission credits you plan to bank in the reports you submit under § 1036.730 as reserved credits. During the model year and before the due date for the final report, you may designate your reserved emission credits for averaging or trading.

(c) Reserved credits become actual emission credits when you submit your final report. However, we may revoke these emission credits if we are unable to verify them after reviewing your reports or auditing your records.

(d) Banked credits retain the designation of the averaging set in which they were generated.

**§ 1036.720 Trading.**

(a) Trading is the exchange of emission credits between manufacturers. You may use traded emission credits for averaging, banking, or further trading transactions. Traded emission credits remain subject to the averaging-set restrictions based on the averaging set in which they were generated.

(b) You may trade actual emission credits as described in this subpart. You may also trade reserved emission

credits, but we may revoke these emission credits based on our review of your records or reports or those of the company with which you traded emission credits. You may trade banked credits within an averaging set to any certifying manufacturer.

(c) If a negative emission credit balance results from a transaction, both the buyer and seller are liable, except in cases we deem to involve fraud. See § 1036.255(e) for cases involving fraud. We may void the certificates of all engine families participating in a trade that results in a manufacturer having a negative balance of emission credits. See § 1036.745.

**§ 1036.725 What must I include in my application for certification?**

(a) You must declare in your application for certification your intent to use the provisions of this subpart for each engine family that will be certified using the ABT program. You must also declare the FELs/FCL you select for the engine family for each pollutant for which you are using the ABT program. Your FELs must comply with the specifications of subpart B of this part, including the FEL caps. FELs/FCLs must be expressed to the same number of decimal places as the applicable standards.

(b) Include the following in your application for certification:

(1) A statement that, to the best of your belief, you will not have a negative balance of emission credits for any averaging set when all emission credits are calculated at the end of the year; or a statement that you will have a negative balance of emission credits for one or more averaging sets, but that it is allowed under § 1036.745.

(2) Detailed calculations of projected emission credits (positive or negative) based on projected U.S.-directed production volumes. We may require you to include similar calculations from your other engine families to project your net credit balances for the model year. If you project negative emission credits for a family, state the source of positive emission credits you expect to use to offset the negative emission credits.

**§ 1036.730 ABT reports.**

(a) If any of your engine families are certified using the ABT provisions of this subpart, you must send a final report by March 31 following the end of the model year. You may ask us to extend the deadline for the final report to April 30.

(b) Your final report must include the following information for each engine

family participating in the ABT program:

(1) Engine-family designation and averaging set.

(2) The emission standards that would otherwise apply to the engine family.

(3) The FCL for each pollutant. If you change the FCL after the start of production, identify the date that you started using the new FCL and/or give the engine identification number for the first engine covered by the new FCL. In this case, identify each applicable FCL and calculate the positive or negative emission credits as specified in § 1036.225.

(4) The projected and actual U.S.-directed production volumes for the model year. If you changed an FCL during the model year, identify the actual production volume associated with each FCL.

(5) The transient cycle conversion factor for each engine configuration as described in § 1036.705.

(6) Useful life.

(7) Calculated positive or negative emission credits for the whole engine family. Identify any emission credits that you traded, as described in paragraph (d)(1) of this section.

(c) Your final report must include the following additional information:

(1) Show that your net balance of emission credits from all your participating engine families in each averaging set in the applicable model year is not negative, except as allowed under § 1036.745. Your credit tracking must account for the limitation on credit life under § 1036.740(d).

(2) State whether you will reserve any emission credits for banking.

(3) State that the report's contents are accurate.

(d) If you trade emission credits, you must send us a report within 90 days after the transaction, as follows:

(1) As the seller, you must include the following information in your report:

(i) The corporate names of the buyer and any brokers.

(ii) A copy of any contracts related to the trade.

(iii) The engine families that generated emission credits for the trade, including the number of emission credits from each family.

(2) As the buyer, you must include the following information in your report:

(i) The corporate names of the seller and any brokers.

(ii) A copy of any contracts related to the trade.

(iii) How you intend to use the emission credits, including the number of emission credits you intend to apply to each engine family (if known).

(e) Send your reports electronically to the Designated Compliance Officer

using an approved information format. If you want to use a different format, send us a written request with justification for a waiver.

(f) Correct errors in your final report as follows:

(1) If you or we determine before the due date for the final report that errors mistakenly decreased your balance of emission credits, you may correct the errors and recalculate the balance of emission credits. You may not make these corrections for errors that are determined after the due date for the final report. If you report a negative balance of emission credits, we may disallow corrections under this paragraph (f)(1).

(2) If you or we determine anytime that errors mistakenly increased your balance of emission credits, you must correct the errors and recalculate the balance of emission credits.

#### **§ 1036.735 Recordkeeping.**

(a) You must organize and maintain your records as described in this section. We may review your records at any time.

(b) Keep the records required by this section for at least eight years after the due date for the final report. You may not use emission credits for any engines if you do not keep all the records required under this section. You must therefore keep these records to continue to bank valid credits. Store these records in any format and on any media, as long as you can promptly send us organized, written records in English if we ask for them. You must keep these records readily available. We may review them at any time.

(c) Keep a copy of the reports we require in §§ 1036.725 and 1036.730.

(d) Keep records of the engine identification number (usually the serial number) for each engine you produce that generates or uses emission credits under the ABT program. You may identify these numbers as a range. If you change the FEL after the start of production, identify the date you started using each FCL and the range of engine identification numbers associated with each FCL. You must also identify the purchaser and destination for each engine you produce to the extent this information is available.

(e) We may require you to keep additional records or to send us relevant information not required by this section in accordance with the Clean Air Act.

#### **§ 1036.740 Restrictions for using emission credits.**

The following restrictions apply for using emission credits:

(a) *Averaging sets.* Except as specified in paragraph (c) of this section, emission

credits may be exchanged only within the following averaging sets:

(1) Spark-ignition engines.

(2) Compression-ignition light heavy-duty engines.

(3) Compression-ignition medium heavy-duty engines.

(4) Compression-ignition heavy heavy-duty engines.

(b) *Applying credits to prior year deficits.* Where your credit balance for the previous year is negative, you may apply credits to that credit deficit only after meeting your credit obligations for the current year.

(c) *Credits from hybrid engines and other advanced technologies.* Credits you generate under § 1036.615 may be used for any of the averaging sets identified in paragraph (a) of this section; you may also use those credits to demonstrate compliance with the CO<sub>2</sub> emission standards in 40 CFR 86.1819 and 40 CFR part 1037. Similarly, you may use advanced-technology credits generated under 40 CFR 86.1819–14(k)(7) or 40 CFR 1037.615 to demonstrate compliance with the CO<sub>2</sub> standards in this part. In the case of spark-ignition engines and compression-ignition light heavy-duty engines, you may not use more than 60,000 Mg of credits from other averaging sets in any model year.

(1) The maximum amount of CO<sub>2</sub> credits you may bring into the following service class groups is 60,000 Mg per model year:

(i) Spark-ignition engines, light heavy-duty compression-ignition engines, and light heavy-duty vehicles. This group comprises the averaging sets listed in paragraphs (a)(1) and (2) of this section and the averaging set listed in 40 CFR 1037.740(a)(1).

(ii) Medium heavy-duty compression-ignition engines and medium heavy-duty vehicles. This group comprises the averaging sets listed in paragraph (a)(3) of this section and 40 CFR 1037.740(a)(2).

(iii) Heavy heavy-duty compression-ignition engines and heavy heavy-duty vehicles. This group comprises the averaging sets listed in paragraph (a)(4) of this section and 40 CFR 1037.740(a)(3).

(2) The limit specified in paragraph (c)(1) of this section does not limit the amount of advanced technology credits that can be used within a service class group if they were generated in that same service class group.

(d) *Credit life.* Credits may be used only for five model years after the year in which they are generated. For example, credits you generate in model year 2018 may be used to demonstrate

compliance with emission standards only through model year 2023.

(e) *Other restrictions.* Other sections of this part specify additional restrictions for using emission credits under certain special provisions.

#### **§ 1036.745 End-of-year CO<sub>2</sub> credit deficits.**

Except as allowed by this section, we may void the certificate of any engine family certified to an FCL above the applicable standard for which you do not have sufficient credits by the deadline for submitting the final report.

(a) Your certificate for an engine family for which you do not have sufficient CO<sub>2</sub> credits will not be void if you remedy the deficit with surplus credits within three model years. For example, if you have a credit deficit of 500 Mg for an engine family at the end of model year 2015, you must generate (or otherwise obtain) a surplus of at least 500 Mg in that same averaging set by the end of model year 2018.

(b) You may not bank or trade away CO<sub>2</sub> credits in the averaging set in any model year in which you have a deficit.

(c) You may apply only surplus credits to your deficit. You may not apply credits to a deficit from an earlier model year if they were generated in a model year for which any of your engine families for that averaging set had an end-of-year credit deficit.

(d) If you do not remedy the deficit with surplus credits within three model years, we may void your certificate for that engine family. Note that voiding a certificate applies *ab initio*. Where the net deficit is less than the total amount of negative credits originally generated by the family, we will void the certificate only with respect to the number of engines needed to reach the amount of the net deficit. For example, if the original engine family generated 500 Mg of negative credits, and the manufacturer's net deficit after three years was 250 Mg, we would void the certificate with respect to half of the engines in the family.

(e) For purposes of calculating the statute of limitations, the following actions are all considered to occur at the expiration of the deadline for offsetting a deficit as specified in paragraph (a) of this section:

(1) Failing to meet the requirements of paragraph (a) of this section.

(2) Failing to satisfy the conditions upon which a certificate was issued relative to offsetting a deficit.

(3) Selling, offering for sale, introducing or delivering into U.S. commerce, or importing vehicles that are found not to be covered by a certificate as a result of failing to offset a deficit.

**§ 1036.750 What can happen if I do not comply with the provisions of this subpart?**

(a) For each engine family participating in the ABT program, the certificate of conformity is conditioned upon full compliance with the provisions of this subpart during and after the model year. You are responsible to establish to our satisfaction that you fully comply with applicable requirements. We may void the certificate of conformity for an engine family if you fail to comply with any provisions of this subpart.

(b) You may certify your engine family to an FCL above an applicable standard based on a projection that you will have enough emission credits to offset the deficit for the engine family. See § 1036.745 for provisions specifying what happens if you cannot show in your final report that you have enough actual emission credits to offset a deficit for any pollutant in an engine family.

(c) We may void the certificate of conformity for an engine family if you fail to keep records, send reports, or give us information we request. Note that failing to keep records, send reports, or give us information we request is also a violation of 42 U.S.C. 7522(a)(2).

(d) You may ask for a hearing if we void your certificate under this section (see § 1036.820).

**§ 1036.755 Information provided to the Department of Transportation.**

After receipt of each manufacturer's final report as specified in § 1036.730 and completion of any verification testing required to validate the manufacturer's submitted final data, we will issue a report to the Department of Transportation with CO<sub>2</sub> emission information and will verify the accuracy of each manufacturer's equivalent fuel consumption data that required by NHTSA under 49 CFR 535.8. We will send a report to DOT for each engine manufacturer based on each regulatory category and subcategory, including sufficient information for NHTSA to determine fuel consumption and associated credit values. See 49 CFR 535.8 to determine if NHTSA deems submission of this information to EPA to also be a submission to NHTSA.

**Subpart I—Definitions and Other Reference Information****§ 1036.801 Definitions.**

The following definitions apply to this part. The definitions apply to all subparts unless we note otherwise. All undefined terms have the meaning the Act gives to them. The definitions follow:

*Act* means the Clean Air Act, as amended, 42 U.S.C. 7401–7671q.

*Adjustable parameter* has the meaning given in 40 CFR part 86.

*Advanced technology* means technology certified under 40 CFR 86.1819–14(k)(7), § 1036.615, or 40 CFR 1037.615.

*Aftertreatment* means relating to a catalytic converter, particulate filter, or any other system, component, or technology mounted downstream of the exhaust valve (or exhaust port) whose design function is to decrease emissions in the engine exhaust before it is exhausted to the environment. Exhaust-gas recirculation (EGR) and turbochargers are not aftertreatment.

*Aircraft* means any vehicle capable of sustained air travel more than 100 feet above the ground.

*Alcohol-fueled engine* means an engine that is designed to run using an alcohol fuel. For purposes of this definition, alcohol fuels do not include fuels with a nominal alcohol content below 25 percent by volume.

*Auxiliary emission control device* means any element of design that senses temperature, motive speed, engine rpm, transmission gear, or any other parameter for the purpose of activating, modulating, delaying, or deactivating the operation of any part of the emission control system.

*Averaging set* has the meaning given in § 1036.740.

*Calibration* means the set of specifications and tolerances specific to a particular design, version, or application of a component or assembly capable of functionally describing its operation over its working range.

*Carryover* means relating to certification based on emission data generated from an earlier model year as described in § 1036.235(d).

*Certification* means relating to the process of obtaining a certificate of conformity for an engine family that complies with the emission standards and requirements in this part.

*Certified emission level* means the highest deteriorated emission level in an engine family for a given pollutant from the applicable transient and/or steady-state testing, rounded to the same number of decimal places as the applicable standard. Note that you may have two certified emission levels for CO<sub>2</sub> if you certify a family for both vocational and tractor use.

*Complete vehicle* means a vehicle meeting the definition of complete vehicle in 40 CFR 1037.801 when it is first sold as a vehicle. For example, where a vehicle manufacturer sells an incomplete vehicle to a secondary manufacturer, the vehicle is not a complete vehicle under this part, even after its final assembly.

*Compression-ignition* means relating to a type of reciprocating, internal-combustion engine that is not a spark-ignition engine. Note that § 1036.1 also deems gas turbine engines and other engines to be compression-ignition engines. Note also that certain spark-ignition engines are subject to the requirements for compression-ignition engines.

*Crankcase emissions* means airborne substances emitted to the atmosphere from any part of the engine crankcase's ventilation or lubrication systems. The crankcase is the housing for the crankshaft and other related internal parts.

*Criteria pollutants* means emissions of NO<sub>x</sub>, HC, PM, and CO. Note that these pollutants are also sometimes described collectively as “non-greenhouse gas pollutants”, although they do not necessarily have negligible global warming potentials.

*Designated Compliance Officer* means one of the following:

(1) For compression-ignition engines, *Designated Compliance Officer* means Director, Diesel Engine Compliance Center, U.S. Environmental Protection Agency, 2000 Traverwood Drive, Ann Arbor, MI 48105; [complianceinfo@epa.gov](mailto:complianceinfo@epa.gov); [epa.gov/epa/otaq/verify/](http://epa.gov/epa/otaq/verify/)

(2) For spark-ignition engines, *Designated Compliance Officer* means Director, Gasoline Engine Compliance Center, U.S. Environmental Protection Agency, 2000 Traverwood Drive, Ann Arbor, MI 48105; [nonroad-si-cert@epa.gov](mailto:nonroad-si-cert@epa.gov); [epa.gov/epa/otaq/verify/](http://epa.gov/epa/otaq/verify/)

*Deteriorated emission level* means the emission level that results from applying the appropriate deterioration factor to the official emission result of the emission-data engine. Note that where no deterioration factor applies, references in this part to the *deteriorated emission level* mean the official emission result.

*Deterioration factor* means the relationship between emissions at the end of useful life (or point of highest emissions if it occurs before the end of useful life) and emissions at the low-hour/low-mileage test point, expressed in one of the following ways:

(1) For multiplicative deterioration factors, the ratio of emissions at the end of useful life (or point of highest emissions) to emissions at the low-hour test point.

(2) For additive deterioration factors, the difference between emissions at the end of useful life (or point of highest emissions) and emissions at the low-hour test point.

*Dual-fuel* means relating to an engine designed for operation on two different types of fuel but not on a continuous

mixture of those fuels (see § 1036.601(d)). For purposes of this part, such an engine remains a dual-fuel engine even if it is designed for operation on three or more different fuels.

*Emission control system* means any device, system, or element of design that controls or reduces the emissions of regulated pollutants from an engine.

*Emission-data engine* means an engine that is tested for certification. This includes engines tested to establish deterioration factors.

*Emission-related maintenance* means maintenance that substantially affects emissions or is likely to substantially affect emission deterioration.

*Engine configuration* means a unique combination of engine hardware and calibration (related to the emission standards) within an engine family. Engines within a single engine configuration differ only with respect to normal production variability or factors unrelated to compliance with emission standards.

*Engine family* has the meaning given in § 1036.230.

*Excluded* means relating to engines that are not subject to some or all of the requirements of this part as follows:

- (1) An engine that has been determined not to be a heavy-duty engine is excluded from this part.
- (2) Certain heavy-duty engines are excluded from the requirements of this part under § 1036.5.
- (3) Specific regulatory provisions of this part may exclude a heavy-duty engine generally subject to this part from one or more specific standards or requirements of this part.

*Exempted* has the meaning given in 40 CFR 1068.30.

*Exhaust-gas recirculation* means a technology that reduces emissions by routing exhaust gases that had been exhausted from the combustion chamber(s) back into the engine to be mixed with incoming air before or during combustion. The use of valve timing to increase the amount of residual exhaust gas in the combustion chamber(s) that is mixed with incoming air before or during combustion is not considered exhaust-gas recirculation for the purposes of this part.

*Family certification level (FCL)* means a CO<sub>2</sub> emission level declared by the manufacturer that is at or above emission test results for all emission-data engines. The FCL serves as the emission standard for the engine family with respect to certification testing if it is different than the otherwise applicable standard. The FCL must be expressed to the same number of

decimal places as the emission standard it replaces.

*Family emission limit (FEL)* means an emission level declared by the manufacturer to serve in place of an otherwise applicable emission standard (other than CO<sub>2</sub> standards) under the ABT program in subpart H of this part. The FEL must be expressed to the same number of decimal places as the emission standard it replaces. The FEL serves as the emission standard for the engine family with respect to all required testing except certification testing for CO<sub>2</sub>. The CO<sub>2</sub> FEL is equal to the CO<sub>2</sub> FCL multiplied by 1.03 and rounded to the same number of decimal places as the standard (e.g., the nearest whole g/hp-hr for the 2016 CO<sub>2</sub> standards).

*Flexible-fuel* means relating to an engine designed for operation on any mixture of two or more different types of fuels (see § 1036.601(d)).

*Fuel type* means a general category of fuels such as diesel fuel, gasoline, or natural gas. There can be multiple grades within a single fuel type, such as premium gasoline, regular gasoline, or gasoline with 10 percent ethanol.

*Good engineering judgment* has the meaning given in 40 CFR 1068.30. See 40 CFR 1068.5 for the administrative process we use to evaluate good engineering judgment.

*Greenhouse gas* means one or more compounds regulated under this part based primarily on their impact on the climate. This generally includes CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O.

*Greenhouse gas emissions model (GEM)* means the GEM simulation tool described in 40 CFR 1037.520. Note that an updated version of GEM applies starting in model year 2021 (see 40 CFR 1037.810).

*Gross vehicle weight rating (GVWR)* means the value specified by the vehicle manufacturer as the maximum design loaded weight of a single vehicle, consistent with good engineering judgment.

*Heavy-duty engine* means any engine which the engine manufacturer could reasonably expect to be used for motive power in a heavy-duty vehicle. For purposes of this definition in this part, the term "engine" includes internal combustion engines and other devices that convert chemical fuel into motive power. For example, a fuel cell or a gas turbine used in a heavy-duty vehicle is a heavy-duty engine.

*Heavy-duty vehicle* means any motor vehicle above 8,500 pounds GVWR or that has a vehicle curb weight above 6,000 pounds or that has a basic vehicle frontal area greater than 45 square feet. *Curb weight* has the meaning given in 40

CFR 86.1803. *Basic vehicle frontal area* has the meaning given in 40 CFR 86.1803.

*Hybrid* means relating to an engine or powertrain that includes energy storage features other than a conventional battery system or conventional flywheel. Supplemental electrical batteries and hydraulic accumulators are examples of hybrid energy storage systems. Note that certain provisions in this part treat hybrid engines and powertrains intended for vehicles that include regenerative braking different than those intended for vehicles that do not include regenerative braking.

*Hydrocarbon (HC)* means the hydrocarbon group on which the emission standards are based for each fuel type. For alcohol-fueled engines, HC means nonmethane hydrocarbon equivalent (NMHCE). For all other engines, HC means nonmethane hydrocarbon (NMHC).

*Identification number* means a unique specification (for example, a model number/serial number combination) that allows someone to distinguish a particular engine from other similar engines.

*Incomplete vehicle* means a vehicle meeting the definition of incomplete vehicle in 40 CFR 1037.801 when it is first sold as a vehicle.

*Innovative technology* means technology certified under § 1036.610.

*Liquefied petroleum gas (LPG)* means a liquid hydrocarbon fuel that is stored under pressure and is composed primarily of nonmethane compounds that are gases at atmospheric conditions. Note that, although this commercial term includes the word "petroleum", LPG is not considered to be a petroleum fuel under the definitions of this section.

*Low-hour* means relating to an engine that has stabilized emissions and represents the undeteriorated emission level. This would generally involve less than 125 hours of operation.

*Manufacture* means the physical and engineering process of designing, constructing, and/or assembling a heavy-duty engine or a heavy-duty vehicle.

*Manufacturer* has the meaning given in section 216(1) of the Act. In general, this term includes any person who manufactures or assembles an engine, vehicle, or piece of equipment for sale in the United States or otherwise introduces a new engine into commerce in the United States. This includes importers who import engines or vehicles for resale.

*Medium-duty passenger vehicle* has the meaning given in 40 CFR 86.1803.

*Model year* means the manufacturer's annual new model production period, except as restricted under this definition. It must include January 1 of the calendar year for which the model year is named, may not begin before January 2 of the previous calendar year, and it must end by December 31 of the named calendar year. Manufacturers may not adjust model years to circumvent or delay compliance with emission standards or to avoid the obligation to certify annually.

*Motor vehicle* has the meaning given in 40 CFR 85.1703.

*Natural gas* means a fuel whose primary constituent is methane.

*New motor vehicle engine* has the meaning given in the Act. This generally means a motor vehicle engine meeting the criteria of either paragraph (1), (2), or (3) of this definition.

(1) A motor vehicle engine for which the ultimate purchaser has never received the equitable or legal title is a *new motor vehicle engine*. This kind of engine might commonly be thought of as "brand new" although a *new motor vehicle engine* may include previously used parts. Under this definition, the engine is new from the time it is produced until the ultimate purchaser receives the title or places it into service, whichever comes first.

(2) An imported motor vehicle engine is a *new motor vehicle engine* if it was originally built on or after January 1, 1970.

(3) Any motor vehicle engine installed in a new motor vehicle.

*Noncompliant engine* means an engine that was originally covered by a certificate of conformity, but is not in the certified configuration or otherwise does not comply with the conditions of the certificate.

*Nonconforming engine* means an engine not covered by a certificate of conformity that would otherwise be subject to emission standards.

*Nonmethane hydrocarbon (NMHC)* means the sum of all hydrocarbon species except methane, as measured according to 40 CFR part 1065.

*Nonmethane hydrocarbon equivalent* has the meaning given in 40 CFR 1065.1001.

*Off-cycle technology* means technology certified under § 1036.610.

*Official emission result* means the measured emission rate for an emission-data engine on a given duty cycle before the application of any deterioration factor, but after the applicability of any required regeneration or other adjustment factors.

*Owners manual* means a document or collection of documents prepared by the engine or vehicle manufacturer for the

owner or operator to describe appropriate engine maintenance, applicable warranties, and any other information related to operating or keeping the engine. The owners manual is typically provided to the ultimate purchaser at the time of sale.

*Oxides of nitrogen* has the meaning given in 40 CFR 1065.1001.

*Percent* has the meaning given in 40 CFR 1065.1001. Note that this means percentages identified in this part are assumed to be infinitely precise without regard to the number of significant figures. For example, one percent of 1,493 is 14.93.

*Petroleum* means gasoline or diesel fuel or other fuels normally derived from crude oil. This does not include methane or LPG.

*Placed into service* means put into initial use for its intended purpose, excluding incidental use by the manufacturer or a dealer.

*Preliminary approval* means approval granted by an authorized EPA representative prior to submission of an application for certification, consistent with the provisions of § 1036.210.

*Primary intended service class* has the meaning given in § 1036.140.

*Rechargeable Energy Storage System (RESS)* means the component(s) of a hybrid engine or vehicle that store recovered energy for later use, such as the battery system in an electric hybrid vehicle.

*Revoke* has the meaning given in 40 CFR 1068.30.

*Round* has the meaning given in 40 CFR 1065.1001.

*Scheduled maintenance* means adjusting, repairing, removing, disassembling, cleaning, or replacing components or systems periodically to keep a part or system from failing, malfunctioning, or wearing prematurely. It also may mean actions you expect are necessary to correct an overt indication of failure or malfunction for which periodic maintenance is not appropriate.

*Small manufacturer* means a manufacturer meeting the criteria specified in 13 CFR 121.201. The employee and revenue limits apply to the total number of employees and total revenue together for affiliated companies. Note that manufacturers with low production volumes may or may not be "small manufacturers".

*Spark-ignition* means relating to a gasoline-fueled engine or any other type of engine with a spark plug (or other sparking device) and with operating characteristics significantly similar to the theoretical Otto combustion cycle. Spark-ignition engines usually use a throttle to regulate intake air flow to

control power during normal operation. Note that some spark-ignition engines are subject to requirements that apply for compression-ignition engines as described in § 1036.140.

*Steady-state* has the meaning given in 40 CFR 1065.1001.

*Suspend* has the meaning given in 40 CFR 1068.30.

*Test engine* means an engine in a test sample.

*Test sample* means the collection of engines selected from the population of an engine family for emission testing. This may include testing for certification, production-line testing, or in-use testing.

*Tractor* means a vehicle meeting the definition of "tractor" in 40 CFR 1037.801, but not classified as a "vocational tractor" under 40 CFR 1037.630, or relating to such a vehicle.

*Tractor engine* means an engine certified for use in tractors. Where an engine family is certified for use in both tractors and vocational vehicles, "tractor engine" means an engine that the engine manufacturer reasonably believes will be (or has been) installed in a tractor. Note that the provisions of this part may require a manufacturer to document how it determines that an engine is a tractor engine.

*Ultimate purchaser* means, with respect to any new engine or vehicle, the first person who in good faith purchases such new engine or vehicle for purposes other than resale.

*United States* has the meaning given in 40 CFR 1068.30.

*Upcoming model year* means for an engine family the model year after the one currently in production.

*U.S.-directed production volume* means the number of engines, subject to the requirements of this part, produced by a manufacturer for which the manufacturer has a reasonable assurance that sale was or will be made to ultimate purchasers in the United States. This does not include engines certified to state emission standards that are different than the emission standards in this part.

*Vehicle* has the meaning given in 40 CFR 1037.801.

*Vocational engine* means an engine certified for use in vocational vehicles. Where an engine family is certified for use in both tractors and vocational vehicles, "vocational engine" means an engine that the engine manufacturer reasonably believes will be (or has been) installed in a vocational vehicle. Note that the provisions of this part may require a manufacturer to document how it determines that an engine is a vocational engine.

*Vocational vehicle* means a vehicle meeting the definition of “vocational” vehicle in 40 CFR 1037.801.

*Void* has the meaning given in 40 CFR 1068.30.

*We (us, our)* means the Administrator of the Environmental Protection Agency and any authorized representatives.

#### § 1036.805 Symbols, abbreviations, and acronyms.

The procedures in this part generally follow either the International System of Units (SI) or the United States customary units, as detailed in NIST Special Publication 811, which we incorporate by reference in § 1036.810.

See 40 CFR 1065.20 for specific provisions related to these conventions. This section summarizes the way we use symbols, units of measure, and other abbreviations.

(a) *Symbols for chemical species.* This part uses the following symbols for chemical species and exhaust constituents:

Symbol	Species
C .....	carbon.
CH <sub>4</sub> .....	methane.
CH <sub>4</sub> N <sub>2</sub> O .....	urea.
CO .....	carbon monoxide.
CO <sub>2</sub> .....	carbon dioxide.
H <sub>2</sub> O .....	water.

Symbol	Species
HC .....	hydrocarbon.
NMHC .....	nonmethane hydrocarbon.
NMHCE .....	nonmethane hydrocarbon equivalent.
NO .....	nitric oxide.
NO <sub>2</sub> .....	nitrogen dioxide.
NO <sub>x</sub> .....	oxides of nitrogen.
N <sub>2</sub> O .....	nitrous oxide.
PM .....	particulate matter.
THC .....	total hydrocarbon.
THCE .....	total hydrocarbon equivalent.

(b) *Symbols for quantities.* This part uses the following symbols and units of measure for various quantities:

Symbol	Quantity	Unit	Unit symbol	Unit in terms of SI base units
$\alpha$ .....	atomic hydrogen-to-carbon ratio .....	mole per mole .....	mol/mol .....	1
$\beta$ .....	atomic oxygen-to-carbon ratio .....	mole per mole .....	mol/mol .....	1
$e$ .....	mass weighted emission result .....	grams/ton-mile .....	g/ton-mi .....	g/kg-km
$E_m$ .....	mass-specific net energy content .....	megajoules/kilogram .....	MJ/kg .....	m <sup>2</sup> ·s <sup>-2</sup>
$f_n$ .....	angular speed (shaft) .....	revolutions per minute .....	r/min .....	$\pi$ ·30·s <sup>-1</sup>
$m$ .....	mass .....	pound mass or kilogram ..	lbm or kg .....	kg
$M$ .....	molar mass .....	gram per mole .....	g/mol .....	10 <sup>-3</sup> ·kg·mol <sup>-1</sup>
$MF$ .....	mass fraction .....			
$P$ .....	power .....	kilowatt .....	kW .....	10 <sup>3</sup> ·m <sup>2</sup> ·kg·s <sup>-3</sup>
$T$ .....	torque (moment of force) .....	newton meter .....	N·m .....	m <sup>2</sup> ·kg·s <sup>-2</sup>
$W$ .....	work .....	kilowatt-hour .....	kW·hr .....	3.6·m <sup>2</sup> ·kg·s <sup>-1</sup>
$w_c$ .....	carbon mass fraction .....	gram/gram .....	g/g .....	1
$x$ .....	amount of substance mole fraction .....	mole per mole .....	mol/mol .....	1
$x_b$ .....	brake energy fraction .....			
$x_{bl}$ .....	brake energy limit .....			

(c) *Superscripts.* This part uses the following superscripts to define a quantity:

Superscript	Quantity
overbar (such as $\bar{y}$ ) .....	arithmetic mean.
overdot (such as $\dot{y}$ ) .....	quantity per unit time.

(d) *Subscripts.* This part uses the following subscripts to define a quantity:

Subscript	Quantity
acc .....	accessory.
Ccombdry .....	carbon from fuel per mole of dry exhaust.
CO <sub>2</sub> urea .....	CO <sub>2</sub> from urea decomposition.
cor .....	corrected.
cycle .....	test cycle.
exh .....	raw exhaust.
fuel .....	fuel.
H <sub>2</sub> Oexhaustdry .....	H <sub>2</sub> O in exhaust per mole of exhaust.
idle .....	idle.
max .....	maximum.
mapped .....	mapped.
meas .....	measured quantity.
neg .....	negative.

Subscript	Quantity
mapped .....	mapped.
pos .....	positive.
ref .....	reference quantity.
stall .....	stall.
test .....	test.

(e) *Other acronyms and abbreviations.* This part uses the following additional abbreviations and acronyms:

ABT .....	averaging, banking, and trading.
AECD .....	auxiliary emission control device.
ASTM .....	American Society for Testing and Materials.
BTU .....	British thermal units.
CFR .....	Code of Federal Regulations.
DF .....	deterioration factor.
DOT .....	Department of Transportation.
E85 .....	gasoline blend including nominally 85 percent denatured ethanol.
EPA .....	Environmental Protection Agency.
FCL .....	Family Certification Level.
FEL .....	Family Emission Limit.
GEM .....	Greenhouse gas Emissions Model.
g/hp-hr .....	grams per brake horsepower-hour.

GVWR .....	gross vehicle weight rating.
LPG .....	liquefied petroleum gas.
NARA .....	National Archives and Records Administration.
NHTSA .....	National Highway Traffic Safety Administration.
NTE .....	not-to-exceed.
RESS .....	rechargeable energy storage system.
RMC .....	ramped-modal cycle.
rpm .....	revolutions per minute.
SCR .....	Selective catalytic reduction.
U.S. ....	United States.
U.S.C. ....	United States Code.

(f) *Prefixes.* This part uses the following prefixes to define a quantity:

Symbol	Quantity	Value
$\mu$ .....	micro .....	10 <sup>6</sup>
m .....	milli .....	10 <sup>-3</sup>
c .....	centi .....	10 <sup>-2</sup>
k .....	kilo .....	10 <sup>3</sup>
M .....	mega .....	10 <sup>6</sup>

#### § 1036.810 Incorporation by reference.

(a) Certain material is incorporated by reference into this part with the approval of the Director of the Federal Register under 5 U.S.C. 552(a) and 1 CFR part 51. To enforce any edition other than that specified in this section, the Environmental Protection Agency

must publish a notice of the change in the **Federal Register** and the material must be available to the public. All approved material is available for inspection at U.S. EPA, Air and Radiation Docket and Information Center, 1301 Constitution Ave. NW., Room B102, EPA West Building, Washington, DC 20460, (202) 202-1744, and is available from the sources listed below. It is also available for inspection at the National Archives and Records Administration (NARA). For information on the availability of this material at NARA, call 202-741-6030, or go to <http://www.archives.gov/federal-register/code-of-federal-regulations/ibr-locations.html>.

(b) American Society for Testing and Materials, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959, (610) 832-9585, <http://www.astm.org/>.

(1) ASTM D240-14 Standard Test Method for Heat of Combustion of Liquid Hydrocarbon Fuels by Bomb Calorimeter, approved October 1, 2014, ("ASTM D240"), IBR approved for § 1036.530(b).

(2) ASTM D4809-13 Standard Test Method for Heat of Combustion of Liquid Hydrocarbon Fuels by Bomb Calorimeter (Precision Method), approved May 1, 2013, ("ASTM D4809"), IBR approved for § 1036.530(b).

(c) National Institute of Standards and Technology, 100 Bureau Drive, Stop 1070, Gaithersburg, MD 20899-1070, (301) 975-6478, or [www.nist.gov](http://www.nist.gov).

(1) NIST Special Publication 811, 2008 Edition, Guide for the Use of the International System of Units (SI), March 2008, IBR approved for § 1036.805.

(2) [Reserved]

#### **§ 1036.815 Confidential information.**

The provisions of 40 CFR 1068.10 apply for information you consider confidential.

#### **§ 1036.820 Requesting a hearing.**

(a) You may request a hearing under certain circumstances, as described elsewhere in this part. To do this, you must file a written request, including a description of your objection and any supporting data, within 30 days after we make a decision.

(b) For a hearing you request under the provisions of this part, we will approve your request if we find that your request raises a substantial factual issue.

(c) If we agree to hold a hearing, we will use the procedures specified in 40 CFR part 1068, subpart G.

#### **§ 1036.825 Reporting and recordkeeping requirements.**

(a) This part includes various requirements to submit and record data or other information. Unless we specify otherwise, store required records in any format and on any media and keep them readily available for eight years after you send an associated application for certification, or eight years after you generate the data if they do not support an application for certification. You are expected to keep your own copy of required records rather than relying on someone else to keep records on your behalf. We may review these records at any time. You must promptly send us organized, written records in English if we ask for them. We may require you to submit written records in an electronic format.

(b) The regulations in § 1036.255 and 40 CFR 1068.25 and 1068.101 describe your obligation to report truthful and complete information. This includes information not related to certification. Failing to properly report information and keep the records we specify violates 40 CFR 1068.101(a)(2), which may involve civil or criminal penalties.

(c) Send all reports and requests for approval to the Designated Compliance Officer (see § 1036.801).

(d) Any written information we require you to send to or receive from another company is deemed to be a required record under this section. Such records are also deemed to be submissions to EPA. Keep these records for eight years unless the regulations specify a different period. We may require you to send us these records whether or not you are a certificate holder.

(e) Under the Paperwork Reduction Act (44 U.S.C. 3501 *et seq.*), the Office of Management and Budget approves the reporting and recordkeeping specified in the applicable regulations. The following items illustrate the kind of reporting and recordkeeping we require for engines and vehicles regulated under this part:

(1) We specify the following requirements related to engine certification in this part 1036:

(i) In § 1036.135 we require engine manufacturers to keep certain records related to duplicate labels sent to vehicle manufacturers.

(ii) In subpart C of this part we identify a wide range of information required to certify engines.

(iii) In subpart G of this part we identify several reporting and recordkeeping items for making demonstrations and getting approval related to various special compliance provisions.

(iv) In §§ 1036.725, 1036.730, and 1036.735 we specify certain records related to averaging, banking, and trading.

(2) We specify the following requirements related to testing in 40 CFR part 1065:

(i) In 40 CFR 1065.2 we give an overview of principles for reporting information.

(ii) In 40 CFR 1065.10 and 1065.12 we specify information needs for establishing various changes to published test procedures.

(iii) In 40 CFR 1065.25 we establish basic guidelines for storing test information.

(iv) In 40 CFR 1065.695 we identify the specific information and data items to record when measuring emissions.

(3) We specify the following requirements related to the general compliance provisions in 40 CFR part 1068:

(i) In 40 CFR 1068.5 we establish a process for evaluating good engineering judgment related to testing and certification.

(ii) In 40 CFR 1068.25 we describe general provisions related to sending and keeping information.

(iii) In 40 CFR 1068.27 we require manufacturers to make engines available for our testing or inspection if we make such a request.

(iv) In 40 CFR 1068.105 we require vehicle manufacturers to keep certain records related to duplicate labels from engine manufacturers.

(v) In 40 CFR 1068.120 we specify recordkeeping related to rebuilding engines.

(vi) In 40 CFR part 1068, subpart C, we identify several reporting and recordkeeping items for making demonstrations and getting approval related to various exemptions.

(vii) In 40 CFR part 1068, subpart D, we identify several reporting and recordkeeping items for making demonstrations and getting approval related to importing engines.

(viii) In 40 CFR 1068.450 and 1068.455 we specify certain records related to testing production-line engines in a selective enforcement audit.

(ix) In 40 CFR 1068.501 we specify certain records related to investigating and reporting emission-related defects.

(x) In 40 CFR 1068.525 and 1068.530 we specify certain records related to recalling nonconforming engines.

■ 116. Part 1037 is revised to read as follows:



## PART 1037—CONTROL OF EMISSIONS FROM NEW HEAVY-DUTY MOTOR VEHICLES

### Subpart A—Overview and Applicability

Sec.

- 1037.1 Applicability.
- 1037.2 Who is responsible for compliance?
- 1037.5 Excluded vehicles.
- 1037.10 How is this part organized?
- 1037.15 Do any other regulation parts apply to me?
- 1037.30 Submission of information.

### Subpart B—Emission Standards and Related Requirements

- 1037.101 Overview of emission standards for heavy-duty vehicles.
- 1037.102 Exhaust emission standards for NO<sub>x</sub>, HC, PM, and CO.
- 1037.103 Evaporative and refueling emission standards.
- 1037.104 Exhaust emission standards for CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O for heavy-duty vehicles at or below 14,000 pounds GVWR.
- 1037.105 Exhaust emission standards for CO<sub>2</sub> for vocational vehicles.
- 1037.106 Exhaust emission standards for CO<sub>2</sub> for tractors above 26,000 pounds GVWR.
- 1037.107 Emission standards for trailers.
- 1037.115 Other requirements.
- 1037.120 Emission-related warranty requirements.
- 1037.125 Maintenance instructions and allowable maintenance.
- 1037.130 Assembly instructions for secondary vehicle manufacturers.
- 1037.135 Labeling.
- 1037.140 Determining vehicle parameters.
- 1037.150 Interim provisions.

### Subpart C—Certifying Vehicle Families

- 1037.201 General requirements for obtaining a certificate of conformity.
- 1037.205 What must I include in my application?
- 1037.210 Preliminary approval before certification.
- 1037.211 Preliminary approval for manufacturers of aerodynamic devices.
- 1037.220 Amending maintenance instructions.
- 1037.225 Amending applications for certification.
- 1037.230 Vehicle families, sub-families, and configurations.
- 1037.231 Powertrain families.
- 1037.235 Testing requirements for certification.
- 1037.241 Demonstrating compliance with exhaust emission standards for greenhouse gas pollutants.
- 1037.243 Demonstrating compliance with evaporative emission standards.
- 1037.250 Reporting and recordkeeping.
- 1037.255 What decisions may EPA make regarding my certificate of conformity?

### Subpart D—Testing Production Vehicles and Engines

- 1037.301 Measurements related to GEM inputs in a selective enforcement audit.

### Subpart E—In-use Testing

- 1037.401 General provisions.

### Subpart F—Test and Modeling Procedures

- 1037.501 General testing and modeling provisions.
- 1037.510 Duty-cycle exhaust testing.
- 1037.515 Determining CO<sub>2</sub> emissions to show compliance for trailers.
- 1037.520 Modeling CO<sub>2</sub> emissions to show compliance for vocational vehicles and tractors.
- 1037.525 Aerodynamic measurements.
- 1037.527 Coastdown procedures for calculating drag area ( $C_D A$ ).
- 1037.529 Wind-tunnel procedures for calculating drag area ( $C_D A$ ).
- 1037.531 Using computational fluid dynamics to calculate drag area ( $C_D A$ ).
- 1037.533 Constant-speed procedure for calculating drag area ( $C_D A$ ).
- 1037.540 Special procedures for testing vehicles with hybrid power take-off.
- 1037.550 Powertrain testing.
- 1037.551 Engine-based simulation of powertrain testing.
- 1037.555 Special procedures for testing Phase 1 post-transmission hybrid systems.
- 1037.560 Rear-axle efficiency test.

### Subpart G—Special Compliance Provisions

- 1037.601 General compliance provisions.
- 1037.605 Installing engines certified to alternate standards for specialty vehicles.
- 1037.610 Vehicles with off-cycle technologies.
- 1037.615 Hybrid vehicles and other advanced technologies.
- 1037.620 Responsibilities for multiple manufacturers.
- 1037.621 Delegated assembly.
- 1037.622 Shipment of incomplete vehicles to secondary vehicle manufacturers.
- 1037.630 Special purpose tractors.
- 1037.631 Exemption for vocational vehicles intended for off-road use.
- 1037.635 Glider kits.
- 1037.640 Variable vehicle speed limiters.
- 1037.645 In-use compliance with family emission limits (FELs).
- 1037.650 Tire manufacturers.
- 1037.655 Post-useful life vehicle modifications.
- 1037.660 Automatic engine shutdown systems.
- 1037.665 In-use tractor testing.

### Subpart H—Averaging, Banking, and Trading for Certification

- 1037.701 General provisions.
- 1037.705 Generating and calculating emission credits.
- 1037.710 Averaging.
- 1037.715 Banking.
- 1037.720 Trading.
- 1037.725 What must I include in my application for certification?
- 1037.730 ABT reports.
- 1037.735 Recordkeeping.
- 1037.740 Restrictions for using emission credits.
- 1037.745 End-of-year CO<sub>2</sub> credit deficits.
- 1037.750 What can happen if I do not comply with the provisions of this subpart?
- 1037.755 Information provided to the Department of Transportation.

### Subpart I—Definitions and Other Reference Information

- 1037.801 Definitions.
- 1037.805 Symbols, abbreviations, and acronyms.
- 1037.810 Incorporation by reference.
- 1037.815 Confidential information.
- 1037.820 Requesting a hearing.
- 1037.825 Reporting and recordkeeping requirements.
- Appendix I to Part 1037—Heavy-duty Transient Test Cycle
- Appendix II to Part 1037—Power Take-Off Test Cycle
- Appendix III to Part 1037—Emission Control Identifiers
- Appendix IV to Part 1037—Heavy-Duty Grade Profile for Phase 2 Steady-State Test Cycles

Authority: 42 U.S.C. 7401–7671q.

### Subpart A—Overview and Applicability

#### § 1037.1 Applicability.

(a) This part contains standards and other regulations applicable to the emission of the air pollutant defined as the aggregate group of six greenhouse gases: Carbon dioxide, nitrous oxide, methane, hydrofluorocarbons, perfluorocarbons, and sulfur hexafluoride. The regulations in this part 1037 apply for all new heavy-duty vehicles, except as provided in §§ 1037.5 and 1037.104. This includes electric vehicles and vehicles fueled by conventional and alternative fuels. This also includes certain trailers as described in §§ 1037.5, 1037.150, and 1037.801.

(b) The provisions of this part apply for alternative fuel conversions as specified in 40 CFR part 85, subpart F.

#### § 1037.2 Who is responsible for compliance?

The regulations in this part 1037 contain provisions that affect both vehicle manufacturers and others. However, the requirements of this part are generally addressed to the vehicle manufacturer(s). The term “you” generally means the vehicle manufacturer(s), especially for issues related to certification. Additional requirements and prohibitions apply to other persons as specified in § 1037.601 and 40 CFR part 1068.

#### § 1037.5 Excluded vehicles.

Except for the definitions specified in § 1037.801, this part does not apply to the following vehicles:

(a) Vehicles not meeting the definition of “motor vehicle” in § 1037.801.

(b) Vehicles excluded from the definition of “heavy-duty vehicle” in § 1037.801 because of vehicle weight, weight rating, and frontal area (such as light-duty vehicles and light-duty trucks).



(c) Vehicles produced in model years before 2014, unless they are certified under § 1037.150.

(d) Medium-duty passenger vehicles and other vehicles subject to the light-duty greenhouse gas standards of 40 CFR part 86. See 40 CFR 86.1818 for greenhouse gas standards that apply for these vehicles. An example of such a vehicle would be a vehicle meeting the definition of “heavy-duty vehicle” in § 1037.801 and 40 CFR 86.1803, but also meeting the definition of “light truck” in 40 CFR 86.1818–12(b)(2).

(e) Vehicles subject to the heavy-duty greenhouse gas standards of 40 CFR part 86. See 40 CFR 86.1819 for greenhouse gas standards that apply for these vehicles. This generally applies for complete heavy-duty vehicles at or below 14,000 pounds GVWR.

(f) Aircraft meeting the definition of “motor vehicle”. For example, this would include certain convertible aircraft that can be adjusted to operate on public roads. Standards apply separately to certain aircraft engines, as described in 40 CFR part 87.

(g) Trailers meeting one or more of the following characteristics:

(1) Trailers designed specifically for in-field operations in logging or mining.

(2) Trailers designed to operate at low speeds such that they are unsuitable for normal highway operation.

(3) Trailers with permanently affixed components designed for heavy construction that allow the trailer to perform its primary function while stationary. This would include crane trailers and concrete trailers. Trailers would not qualify under this paragraph (g)(3) based on welding equipment or other components that are commonly used separate from trailers.

(4) Trailers less than 35 feet long with three axles, and all trailers with four or more axles.

(5) Trailers intended for temporary or permanent residence, office space, or other work space, such as campers, mobile homes, and carnival trailers.

(6) Trailers designed specifically to transport livestock.

(7) Trailers built before January 1, 2018.

(8) Note that the definition of trailer in § 1037.801 excludes equipment that serves similar purposes but are not intended to be pulled by a tractor. For example, car-hauling equipment does not qualify as a trailer under this part if it is designed to be pulled by a heavy-duty vehicle with a pintle hook or hitch instead of a fifth wheel.

(h) Where it is unclear, you may ask us to make a determination regarding the exclusions identified in this section.

We recommend that you make your request before you produce the vehicle.

#### **§ 1037.10 How is this part organized?**

This part 1037 is divided into the following subparts:

(a) Subpart A of this part defines the applicability of part 1037 and gives an overview of regulatory requirements.

(b) Subpart B of this part describes the emission standards and other requirements that must be met to certify vehicles under this part. Note that § 1037.150 discusses certain interim requirements and compliance provisions that apply only for a limited time.

(c) Subpart C of this part describes how to apply for a certificate of conformity for vehicles subject to the standards of § 1037.105 or § 1037.106.

(d) [Reserved]

(e) Subpart E of this part addresses testing of in-use vehicles.

(f) Subpart F of this part describes how to test your vehicles and perform emission modeling (including references to other parts of the Code of Federal Regulations) for vehicles subject to the standards of § 1037.105 or § 1037.106.

(g) Subpart G of this part and 40 CFR part 1068 describe requirements, prohibitions, and other provisions that apply to manufacturers, owners, operators, rebuilders, and all others. Section 1037.601 describes how 40 CFR part 1068 applies for heavy-duty vehicles.

(h) Subpart H of this part describes how you may generate and use emission credits to certify vehicles that are subject to the standards of § 1037.105 or § 1037.106.

(i) Subpart I of this part contains definitions and other reference information.

#### **§ 1037.15 Do any other regulation parts apply to me?**

(a) Parts 1065 and 1066 of this chapter describe procedures and equipment specifications for testing engines and vehicles to measure exhaust emissions. Subpart F of this part 1037 describes how to apply the provisions of part 1065 and part 1066 of this chapter to determine whether vehicles meet the exhaust emission standards in this part.

(b) As described in § 1037.601, certain requirements and prohibitions of part 1068 of this chapter apply to everyone, including anyone who manufactures, imports, installs, owns, operates, or rebuilds any of the vehicles subject to this part 1037. Part 1068 of this chapter describes general provisions that apply broadly, but do not necessarily apply for all vehicles or all persons. The issues

addressed by these provisions include these seven areas:

(1) Prohibited acts and penalties for manufacturers and others.

(2) Rebuilding and other aftermarket changes.

(3) Exclusions and exemptions for certain vehicles.

(4) Importing vehicles.

(5) Selective enforcement audits of your production.

(6) Recall.

(7) Procedures for hearings.

(c) [Reserved]

(d) Other parts of this chapter apply if referenced in this part.

#### **§ 1037.30 Submission of information.**

Unless we specify otherwise, send all reports and requests for approval to the Designated Compliance Officer (see § 1037.801). See § 1037.825 for additional reporting and recordkeeping provisions.

#### **Subpart B—Emission Standards and Related Requirements**

##### **§ 1037.101 Overview of emission standards for heavy-duty vehicles.**

(a) This part specifies emission standards for certain vehicles and for certain pollutants. This part contains standards and other regulations applicable to the emission of the air pollutant defined as the aggregate group of six greenhouse gases: Carbon dioxide, nitrous oxide, methane, hydrofluorocarbons, perfluorocarbons, and sulfur hexafluoride.

(b) The regulated emissions are addressed in four groups:

(1) *Exhaust emissions of NO<sub>x</sub>, HC, PM, and CO.* These pollutants are sometimes described collectively as “criteria pollutants” because they are either criteria pollutants under the Clean Air Act or precursors to the criteria pollutant ozone. These pollutants are also sometimes described collectively as “non-greenhouse gas pollutants”, although they do not necessarily have negligible global warming potential. As described in § 1037.102, standards for these pollutants are provided in 40 CFR part 86.

(2) *Exhaust emissions of CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O.* These pollutants are described collectively in this part as “greenhouse gas pollutants” because they are regulated primarily based on their impact on the climate. These standards are provided in §§ 1037.105 through 1037.107.

(3) *Hydrofluorocarbons.* These pollutants are also “greenhouse gas pollutants” but are treated separately from exhaust greenhouse gas pollutants

listed in paragraph (b)(2) of this section. These standards are provided in § 1037.115.

(4) *Fuel evaporative emissions.* These requirements are described in § 1037.103.

(c) The regulated heavy-duty vehicles are addressed in different groups as follows:

(1) For criteria pollutants, vocational vehicles and tractors are regulated based on gross vehicle weight rating (GVWR), whether they are considered “spark-ignition” or “compression-ignition,” and whether they are first sold as complete or incomplete vehicles.

(2) For greenhouse gas pollutants, vehicles are regulated in the following groups:

(i) Tractors above 26,000 pounds GVWR.

(ii) Trailers are subject to standards as specified in § 1037.107.

(iii) All other motor vehicles subject to standards under this part. These other vehicles are referred to as “vocational” vehicles.

(iv) The greenhouse gas emission standards in some cases apply differently for “spark-ignition” and “compression-ignition” engines or vehicles. Engine requirements are similarly differentiated, as described in 40 CFR 1036.140. References in this part 1037 to “spark-ignition” or “compression-ignition” defer to the application of standards under 40 CFR 1036.140. For example, any vehicle with an engine certified to spark-ignition standards under 40 CFR part 1036 is subject to requirements under this part 1037 that apply for spark-ignition vehicles.

(3) For evaporative and refueling emissions, vehicles are regulated based on the type of fuel they use. Vehicles fueled with volatile liquid fuels or gaseous fuels are subject to evaporative emission standards. Vehicles up to a certain size that are fueled with gasoline, diesel fuel, ethanol, methanol, or LPG are subject to refueling emission standards.

#### **§ 1037.102 Exhaust emission standards for NO<sub>x</sub>, HC, PM, and CO.**

See 40 CFR part 86 for the exhaust emission standards for NO<sub>x</sub>, HC, PM, and CO that apply for heavy-duty vehicles.

#### **§ 1037.103 Evaporative and refueling emission standards.**

(a) *Applicability.* Evaporative and refueling emission standards apply to heavy-duty vehicles as follows:

(1) Complete and incomplete heavy-duty vehicles at or below 14,000 pounds GVWR must meet evaporative and

refueling emission standards as specified in 40 CFR part 86, subpart S, instead of the requirements specified in this section.

(2) Heavy-duty vehicles above 14,000 pounds GVWR that run on volatile liquid fuel (such as gasoline or ethanol) or gaseous fuel (such as natural gas or LPG) must meet evaporative and refueling emission standards as specified in this section.

(b) *Emission standards.* The evaporative and refueling emission standards and measurement procedures specified in 40 CFR 86.1813 apply for vehicles above 14,000 pounds GVWR, except as described in this section. The evaporative emission standards phase in over model years 2018 through 2022, with provisions allowing for voluntary compliance with the standards as early as model year 2015. Count vehicles subject to standards under this section the same as heavy-duty vehicles at or below 14,000 pounds GVWR to comply with the phase-in requirements specified in 40 CFR 86.1813. These vehicles may generate and use emission credits as described in 40 CFR part 86, subpart S, but only for vehicles that are tested for certification instead of relying on the provisions of paragraph (c) of this section. The following provisions apply instead of what is specified in 40 CFR 86.1813:

(1) The refueling standards in 40 CFR 86.1813–17(b) apply to complete vehicles starting in model year 2022; they are optional for incomplete vehicles.

(2) The leak standard in 40 CFR 86.1813–17(a)(4) does not apply.

(3) The FEL cap relative to the diurnal plus hot soak standard for low-altitude testing is 1.9 grams per test.

(4) The diurnal plus hot soak standard for high-altitude testing is 2.3 grams per test.

(5) Testing does not require measurement of exhaust emissions. Disregard references in subpart B of this part to procedures, equipment specifications, and recordkeeping related to measuring exhaust emissions. All references to the exhaust test under 40 CFR part 86, subpart B, are considered the “dynamometer run” as part of the evaporative testing sequence under this subpart.

(6) Vehicles not yet subject to the Tier 3 standards in 40 CFR 86.1813 must meet evaporative emission standards as specified in 40 CFR 86.008–10(b)(1) and (2) for Otto-cycle applications and 40 CFR 86.007–11(b)(3)(ii) and (b)(4)(ii) for diesel-cycle applications.

(c) *Compliance demonstration.* You may provide a statement in the application for certification that

vehicles above 14,000 pounds GVWR comply with evaporative and refueling emission standards instead of submitting test data if you include an engineering analysis describing how vehicles include design parameters, equipment, operating controls, or other elements of design that adequately demonstrate that vehicles comply with the standards. We would expect emission control components and systems to exhibit a comparable degree of control relative to vehicles that comply based on testing. For example, vehicles that comply under this paragraph (c) should rely on comparable material specifications to limit fuel permeation, and components should be sized and calibrated to correspond with the appropriate fuel capacities, fuel flow rates, purge strategies, and other vehicle operating characteristics. You may alternatively show that design parameters are comparable to those for vehicles at or below 14,000 pounds GVWR certified under 40 CFR part 86, subpart S.

(d) *CNG refueling requirement.* Compressed natural gas vehicles must meet the requirements for fueling connection devices as specified in 40 CFR 86.1813–17(f)(1). Vehicles meeting these requirements are deemed to comply with evaporative and refueling emission standards.

(e) *LNG refueling requirement.* Liquefied natural gas vehicles must meet the requirements in Section 4.2 of SAE J2343 (incorporated by reference in § 1037.810), which specifies that vehicles meet a five-day hold time after a refueling event before the fuel reaches the point of venting to relieve pressure. This hold time starts immediately after a conventional refueling event corresponding to the vehicle’s refueling fittings and other hardware, without any stabilization period to reach a different starting condition for the fuel in the tank. The vehicle must remain parked away from direct sun with ambient temperatures between (20 and 30) °C throughout the measurement procedure. This standard and procedure are consistent with Section 9.3.5 of NFPA 52, except that NFPA specifies a three-day hold time. Vehicles meeting these requirements are deemed to comply with evaporative and refueling emission standards. The provisions of this paragraph (e) are optional for vehicles produced before January 1, 2020.

(f) *Incomplete vehicles.* If you sell incomplete vehicles, you must identify the maximum fuel tank capacity for which you designed the vehicle’s evaporative emission control system.

(g) *Useful life.* The evaporative emission standards of this section apply

for the full useful life, expressed in service miles or calendar years, whichever comes first. The useful life values for the standards of this section are described in 40 CFR 86.1805.

(h) *Auxiliary engines and separate fuel systems.* The provisions of this paragraph (g) apply for vehicles with auxiliary engines. This includes any engines installed in the final vehicle configuration that contribute no motive power through the vehicle's transmission.

(1) Auxiliary engines and associated fuel-system components must be installed when testing complete vehicles. If the auxiliary engine draws fuel from a separate fuel tank, you must fill the extra fuel tank before the start of diurnal testing as described for the vehicle's main fuel tank. Use good engineering judgment to ensure that any nonmetal portions of the fuel system related to the auxiliary engine have reached stabilized levels of permeation emissions. The auxiliary engine must not operate during the running loss test or any other portion of testing under this section.

(2) For testing with incomplete vehicles, you may omit installation of auxiliary engines and associated fuel-system components as long as those components installed in the final configuration are certified to meet the applicable emission standards for Small SI equipment described in 40 CFR 1054.112 or for Large SI engines in 40 CFR 1048.105. For any fuel-system components that you do not install, your installation instructions must describe this certification requirement.

**§ 1037.104 Exhaust emission standards for CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O for heavy-duty vehicles at or below 14,000 pounds GVWR.**

Heavy-duty vehicles at or below 14,000 pounds GVWR are not subject to the provisions of this part 1037 if they are subject to 40 CFR part 86, subpart S, including all vehicles certified under 40 CFR part 86, subpart S. See 40 CFR 86.1819 and 86.1865 for detailed provisions that apply for these vehicles.

**§ 1037.105 Exhaust emission standards for CO<sub>2</sub> for vocational vehicles.**

(a) The standards of this section apply for the following vehicles:

(1) Vehicles above 14,000 pounds GVWR and at or below 26,000 pounds GVWR, but not certified to the vehicle standards in 40 CFR 86.1819.

(2) Vehicles above 26,000 pounds GVWR that are not tractors.

(3) Vocational tractors.

(4) Heavy-duty vehicles at or below 14,000 pounds GVWR that are excluded from the standards in 40 CFR 86.1819 or that use engines certified under § 1037.150(m).

(b) CO<sub>2</sub> standards apply as described in this paragraph (b). The provisions of § 1037.241 specify how to comply with these standards. Standards differ based on engine cycle, vehicle weight class, and intended vehicle duty cycle. See § 1037.510(c) to determine which duty cycle applies.

(1) Model year 2027 and later vehicles are subject to CO<sub>2</sub> standards corresponding to the selected subcategories as shown in the following table:

**TABLE 1 OF § 1037.105—PHASE 2 CO<sub>2</sub> STANDARDS FOR MODEL YEAR 2027 AND LATER VOCATIONAL VEHICLES**  
[g/ton-mile]

Engine type	Vehicle size	Multi-purpose	Regional	Urban
Compression-ignition .....	Class 2b–5 .....	280	292	272
Compression-ignition .....	Class 6–7 .....	174	170	172
Compression-ignition .....	Class 8 .....	183	174	182
Spark-ignition .....	Class 2b–5 .....	308	321	299
Spark-ignition .....	Class 6–7 .....	191	187	189
Spark-ignition .....	Class 8 .....	198	188	196

(2) Model year 2024 through 2026 vehicles are subject to CO<sub>2</sub> standards corresponding to the selected

subcategories as shown in the following table:

**TABLE 2 OF § 1037.105—PHASE 2 CO<sub>2</sub> STANDARDS FOR MODEL YEAR 2024 AND LATER VOCATIONAL VEHICLES**  
[g/ton-mile]

Engine type	Vehicle size	Multi-purpose	Regional	Urban
Compression-ignition .....	Class 2b–5 .....	292	304	284
Compression-ignition .....	Class 6–7 .....	181	178	179
Compression-ignition .....	Class 8 .....	192	182	190
Spark-ignition .....	Class 2b–5 .....	321	334	312
Spark-ignition .....	Class 6–7 .....	199	196	197
Spark-ignition .....	Class 8 .....	210	199	208

(3) Model year 2021 through 2023 vehicles are subject to CO<sub>2</sub> standards corresponding to the selected

subcategories as shown in the following table:

TABLE 3 OF § 1037.105—PHASE 2 CO<sub>2</sub> STANDARDS FOR MODEL YEAR 2021 THROUGH 2023 VOCATIONAL VEHICLES  
[g/ton-mile]

Engine type	Vehicle size	Multi-purpose	Regional	Urban
Compression-ignition .....	Class 2b–5 .....	305	318	296
Compression-ignition .....	Class 6–7 .....	190	186	188
Compression-ignition .....	Class 8 .....	200	189	198
Spark-ignition .....	Class 2b–5 .....	329	343	320
Spark-ignition .....	Class 6–7 .....	205	201	203
Spark-ignition .....	Class 8 .....	216	204	214

(4) You may certify model year 2021 and later emergency vehicles to the CO<sub>2</sub> standards specified in Table 5 of this section instead of the standards specified in paragraphs (b)(1) through (3) of this section. Vehicles certified to these alternative standards may not generate emission credits.

TABLE 5 OF § 1037.105—ALTER-NATIVE PHASE 2 CO<sub>2</sub> STANDARDS FOR EMERGENCY VEHICLES  
[g/ton-mile]

Vehicle size	CO <sub>2</sub> standard
Class 2b–5 .....	321
Class 6–7 .....	201
Class 8 .....	213

(5) Model year 2014 through 2020 vehicles are subject to Phase 1 CO<sub>2</sub> standards as shown in the following table:

TABLE 4 OF § 1037.105—PHASE 1 CO<sub>2</sub> STANDARDS FOR MODEL YEAR 2014 THROUGH 2020 VOCATIONAL VEHICLES  
[g/ton-mile]

Vehicle size	CO <sub>2</sub> standard for model years 2014–2016	CO <sub>2</sub> standard for model year 2017 and later
Class 2b–5 .....	388	373
Class 6–7 .....	234	225
Class 8 .....	226	222

(c) No CH<sub>4</sub> or N<sub>2</sub>O standards apply under this section. See 40 CFR part 1036 for CH<sub>4</sub> or N<sub>2</sub>O standards that apply to engines used in these vehicles.

(d) You may generate or use emission credits for averaging, banking, and trading as described in subpart H of this part. This requires that you specify a Family Emission Limit (FEL) for CO<sub>2</sub> for each vehicle subfamily. The FEL may not be less than the result of emission modeling from § 1037.520. These FELs serve as the emission standards for the vehicle subfamily instead of the standards specified in paragraph (b) of this section.

(e) The exhaust emission standards of this section apply for the full useful life, expressed in service miles or calendar years, whichever comes first. The following useful life values apply for the standards of this section:

(1) 150,000 miles or 15 years, whichever comes first, for Class 2b through Class 5 vehicles.

(2) 185,000 miles or 10 years, whichever comes first, for Class 6 and Class 7 vehicles.

(3) 435,000 miles or 10 years, whichever comes first, for Class 8 vehicles.

(f) See § 1037.631 for provisions that exempt certain vehicles used in off-road operation from the standards of this section.

(g) You may optionally certify a vocational vehicle to the standards and useful life applicable to a heavier vehicle service class (such as medium heavy-duty instead of light heavy-duty), provided you do not generate credits with the vehicle. If you include lighter vehicles in a credit-generating subfamily (with an FEL below the standard),

exclude their production volume from the credit calculation. Conversely, if you include lighter vehicles in a credit-using subfamily, you must include their production volume in the credit calculation.

#### § 1037.106 Exhaust emission standards for CO<sub>2</sub> for tractors above 26,000 pounds GVWR.

(a) The CO<sub>2</sub> standards of this section apply for tractors above 26,000 pounds GVWR. Note that the standards of this section do not apply for vehicles classified as “vocational tractors” under § 1037.630,

(b) The CO<sub>2</sub> standards for tractors above 26,000 pounds GVWR are given in Table 1 of this section. The provisions of § 1037.241 specify how to comply with these standards.

TABLE 1 OF § 1037.106—CO<sub>2</sub> STANDARDS FOR CLASS 7 AND CLASS 8 TRACTORS BY MODEL YEAR  
[g/ton-mile]

Subcategory <sup>1</sup>	Phase 1 standards for model years 2014–2016	Phase 1 standards for model years 2017–2020	Phase 2 standards for model years 2021–2023	Phase 2 standards for model years 2024–2026	Phase 2 standards for model year 2027 and later
Class 7 Low-Roof (all cab styles) .....	107	104	97	90	87
Class 7 Mid-Roof (all cab styles) .....	119	115	107	100	96
Class 7 High-Roof (all cab styles) .....	124	120	109	101	96
Class 8 Low-Roof Day Cab .....	81	80	78	72	70

TABLE 1 OF § 1037.106—CO<sub>2</sub> STANDARDS FOR CLASS 7 AND CLASS 8 TRACTORS BY MODEL YEAR—Continued  
[g/ton-mile]

Subcategory <sup>1</sup>	Phase 1 standards for model years 2014–2016	Phase 1 standards for model years 2017–2020	Phase 2 standards for model years 2021–2023	Phase 2 standards for model years 2024–2026	Phase 2 standards for model year 2027 and later
Class 8 Low-Roof Sleeper Cab .....	68	66	70	64	62
Class 8 Mid-Roof Day Cab .....	88	86	84	78	76
Class 8 Mid-Roof Sleeper Cab .....	76	73	78	71	69
Class 8 High-Roof Day Cab .....	92	89	86	79	76
Class 8 High-Roof Sleeper Cab .....	75	72	77	70	67
Heavy-Haul Tractors .....			54	52	51

<sup>1</sup> Sub-category terms are defined in § 1037.801.

(c) No CH<sub>4</sub> or N<sub>2</sub>O standards apply under this section. See 40 CFR part 1036 for CH<sub>4</sub> or N<sub>2</sub>O standards that apply to engines used in these vehicles.

(d) You may generate or use emission credits for averaging, banking, and trading as described in subpart H of this part. This requires that you calculate a credit quantity if you specify a Family Emission Limit (FEL) that is different than the standard specified in this section for a given pollutant. The FEL may not be less than the result of emission modeling from § 1037.520. These FELs serve as the emission standards for the specific vehicle subfamily instead of the standards specified in paragraph (a) of this section.

(e) The exhaust emission standards of this section apply for the full useful life, expressed in service miles or calendar years, whichever comes first. The following useful life values apply for the standards of this section:

- (1) 185,000 miles or 10 years, whichever comes first, for vehicles at or below 33,000 pounds GVWR.
- (2) 435,000 miles or 10 years, whichever comes first, for vehicles above 33,000 pounds GVWR.

(f) You may optionally certify a tractor to the standards and useful life applicable to a heavier vehicle service class (such as heavy heavy-duty instead of medium heavy-duty), provided you do not generate credits with the vehicle. If you include lighter vehicles in a credit-generating subfamily (with an FEL below the standard), exclude its production volume from the credit calculation. Conversely, if you include lighter vehicles in a credit-using subfamily, you must include their production volume in the credit calculation.

#### § 1037.107 Emission standards for trailers.

The exhaust emission standards specified in this section apply to trailers based on the effect of trailer designs on the performance of the trailer in conjunction with a tractor; this accounts for the effect of the trailer on the tractor's exhaust emissions, even though trailers themselves have no exhaust emissions.

(a) Standards apply for trailers as follows:

- (1) Different levels of stringency apply for box vans depending on features that may affect aerodynamic performance.

You may optionally meet less stringent standards for different trailer types, which we characterize as follows:

(i) For trailers 35 feet or longer, “non-aero trailers” are box vans that have a rear lift gate or rear hinged ramp, and at least one of the following side features: side lift gate, belly box, side-mounted pull-out platform, steps for side-door access, or a drop-deck design. For trailers less than 35 feet long, “non-aero trailers” are refrigerated box vans with at least one of the side features identified for longer trailers.

(ii) “Partial-aero trailers” are box vans that have at least one of the side features identified in paragraph (a)(1)(i) of this section. Long box vans also qualify as partial-aero trailers if they have a rear lift gate or rear hinged ramp. Note that this paragraph (a)(1)(ii) does not apply for box vans designated as “non-aero trailers” under paragraph (a)(1)(i) of this section.

(iii) “Full-aero trailers” are box vans that do not meet the specifications of either paragraph (a)(1)(i) or (ii) of this section.

(2) CO<sub>2</sub> standards apply for full-aero trailers as specified in the following table:

TABLE 1 OF § 1037.107—PHASE 2 CO<sub>2</sub> STANDARDS FOR TRAILERS  
[g/ton-mile]

Model year	Dry van		Refrigerated van	
	Short	Long	Short	Long
2018–2020 .....	144	83	147	84
2021–2023 .....	143	81	146	82
2024–2026 .....	141	79	144	79
2027+ .....	140	77	144	77

(3) Partial-aero trailers may continue to meet the 2024 standards in 2027 and later model years.

(4) Non-box trailers and non-aero trailers must meet standards as follows:

- (i) Trailers must use qualified automatic tire inflation systems with wheels on all axles.

(ii) Trailers must use tires with a TRRL at or below 4.7 kg/ton. Through model year 2023, trailers may instead use tires with a TRRL at or below 5.1 kg/ton.

(5) You may generate or use emission credits for averaging to demonstrate compliance with the standards specified

in paragraph (a)(2) of this section as described in subpart H of this part. This requires that you specify a Family Emission Limit (FEL) for CO<sub>2</sub> for each vehicle subfamily. The FEL may not be less than the result of the emission calculation in § 1037.515. These FELs serve as the emission standards for the

specific vehicle subfamily instead of the standards specified in paragraph (a) of this section. You may not use averaging for non-box trailers, partial-aero trailers, or non-aero trailers that meet standards under paragraph (a)(3) or (a)(4) of this section, and you may not use emission credits for banking or trading for any trailers.

(6) The provisions of § 1037.241 specify how to comply with the standards of this section.

(b) No CH<sub>4</sub>, N<sub>2</sub>O, or HFC standards apply under this section.

(c) The emission standards of this section apply for a useful life of 10 years.

#### § 1037.115 Other requirements.

Vehicles required to meet the emission standards of this part must meet the following additional requirements, except as noted elsewhere in this part:

(a) *Adjustable parameters.* Vehicles that have adjustable parameters must meet all the requirements of this part for any adjustment in the physically adjustable range. We may require that you set adjustable parameters to any specification within the adjustable range during any testing. See 40 CFR 86.094–22 for information related to determining whether or not an operating parameter is considered adjustable. You must ensure safe vehicle operation throughout the physically adjustable range of each adjustable parameter, including consideration of production tolerances. Note that adjustable roof fairings and trailer rear fairings are deemed not to be adjustable parameters.

(b) *Prohibited controls.* You may not design your vehicles with emission control devices, systems, or elements of design that cause or contribute to an unreasonable risk to public health, welfare, or safety while operating. For example, this would apply if the vehicle emits a noxious or toxic substance it would otherwise not emit that contributes to such an unreasonable risk.

(c) [Reserved]

(d) *Defeat devices.* 40 CFR 1068.101 prohibits the use of defeat devices.

(e) *Air conditioning leakage.* Loss of refrigerant from your air conditioning systems may not exceed a total leakage rate of 11.0 grams per year or a percent leakage rate of 1.50 percent per year, whichever is greater. Calculate the total leakage rate in g/year as specified in 40 CFR 86.1867–12(a). Calculate the percent leakage rate as: [total leakage rate (g/yr)] ÷ [total refrigerant capacity (g)] × 100. Round your percent leakage rate to the nearest one-hundredth of a percent. This paragraph (e) does not

apply for refrigeration units installed on trailers or for refrigeration units on vocational vehicles that are limited to cooling cargo.

(1) For purposes of this requirement, “refrigerant capacity” is the total mass of refrigerant recommended by the vehicle manufacturer as representing a full charge. Where full charge is specified as a pressure, use good engineering judgment to convert the pressure and system volume to a mass.

(2) If your system uses a refrigerant other than HFC–134a that is listed as an acceptable substitute refrigerant for heavy-duty vehicles under 40 CFR part 82, subpart G, and the substitute refrigerant is identified in 40 CFR 86.1867–12(e), your system is deemed to meet the leakage standard in this paragraph (e), consistent with good engineering judgment, and the leakage rate reporting requirement of § 1037.205(c)(1) does not apply. If your system uses any other refrigerant that is listed as an acceptable substitute refrigerant for heavy-duty vehicles under 40 CFR part 82, subpart G, contact us for procedures for calculating the leakage rate in a way that appropriately accounts for the refrigerant’s properties.

#### § 1037.120 Emission-related warranty requirements.

(a) *General requirements.* You must warrant to the ultimate purchaser and each subsequent purchaser that the new vehicle, including all parts of its emission control system, meets two conditions:

(1) It is designed, built, and equipped so it conforms at the time of sale to the ultimate purchaser with the requirements of this part.

(2) It is free from defects in materials and workmanship that cause the vehicle to fail to conform to the requirements of this part during the applicable warranty period.

(b) *Warranty period.* (1) Your emission-related warranty must be valid for at least:

(i) 5 years or 50,000 miles for spark-ignition vehicles and Class 5 and lighter heavy-duty vehicles (except tires).

(ii) 5 years or 100,000 miles for Class 6 through Class 8 heavy-duty vehicles (except tires).

(iii) 5 years for trailers (except tires).

(iv) 1 year for tires installed on trailers, and 2 years or 24,000 miles for all other tires.

(2) You may offer an emission-related warranty more generous than we require. The emission-related warranty for the vehicle may not be shorter than any basic mechanical warranty you provide to that owner without charge for

the vehicle. Similarly, the emission-related warranty for any component may not be shorter than any warranty you provide to that owner without charge for that component. This means that your warranty for a given vehicle may not treat emission-related and nonemission-related defects differently for any component. The warranty period begins when the vehicle is placed into service.

(c) *Components covered.* The emission-related warranty covers tires, automatic tire inflation systems, vehicle speed limiters, idle shutdown systems, hybrid system components, and devices added to the vehicle to improve aerodynamic performance (not including standard components such as hoods or mirrors even if they have been optimized for aerodynamics), to the extent such emission-related components are included in your application for certification. The emission-related warranty also covers other added emission-related components to the extent they are included in your application for certification. The emission-related warranty covers all components whose failure would increase a vehicle’s emissions of air conditioning refrigerants (for vehicles subject to air conditioning leakage standards), and it covers all components whose failure would increase a vehicle’s evaporative emissions (for vehicles subject to evaporative emission standards). The emission-related warranty covers these components even if another company produces the component. Your emission-related warranty does not need to cover components whose failure would not increase a vehicle’s emissions of any regulated pollutant.

(d) *Limited applicability.* You may deny warranty claims under this section if the operator caused the problem through improper maintenance or use, as described in 40 CFR 1068.115.

(e) *Owners manual.* Describe in the owners manual the emission-related warranty provisions from this section that apply to the vehicle.

#### § 1037.125 Maintenance instructions and allowable maintenance.

Give the ultimate purchaser of each new vehicle written instructions for properly maintaining and using the vehicle, including the emission control system. The maintenance instructions also apply to service accumulation on any of your emission-data vehicles. See paragraph (i) of this section for requirements related to tire replacement. Only the provisions of paragraph (h) of this section apply for trailers.

(a) *Critical emission-related maintenance.* Critical emission-related maintenance includes any adjustment, cleaning, repair, or replacement of critical emission-related components. This may also include additional emission-related maintenance that you determine is critical if we approve it in advance. You may schedule critical emission-related maintenance on these components if you demonstrate that the maintenance is reasonably likely to be done at the recommended intervals on in-use vehicles. We will accept scheduled maintenance as reasonably likely to occur if you satisfy any of the following conditions:

(1) You present data showing that, if a lack of maintenance increases emissions, it also unacceptably degrades the vehicle's performance.

(2) You present survey data showing that at least 80 percent of vehicles in the field get the maintenance you specify at the recommended intervals.

(3) You provide the maintenance free of charge and clearly say so in your maintenance instructions.

(4) You otherwise show us that the maintenance is reasonably likely to be done at the recommended intervals.

(b) *Recommended additional maintenance.* You may recommend any additional amount of maintenance on the components listed in paragraph (a) of this section, as long as you state clearly that these maintenance steps are not necessary to keep the emission-related warranty valid. If operators do the maintenance specified in paragraph (a) of this section, but not the recommended additional maintenance, this does not allow you to disqualify those vehicles from in-use testing or deny a warranty claim. Do not take these maintenance steps during service accumulation on your emission-data vehicles.

(c) *Special maintenance.* You may specify more frequent maintenance to address problems related to special situations, such as atypical vehicle operation. You must clearly state that this additional maintenance is associated with the special situation you are addressing. We may disapprove your maintenance instructions if we determine that you have specified special maintenance steps to address vehicle operation that is not atypical, or that the maintenance is unlikely to occur in use. If we determine that certain maintenance items do not qualify as special maintenance under this paragraph (c), you may identify this as recommended additional maintenance under paragraph (b) of this section.

(d) *Noncritical emission-related maintenance.* Subject to the provisions of this paragraph (d), you may schedule any amount of emission-related inspection or maintenance that is not covered by paragraph (a) of this section (that is, maintenance that is neither explicitly identified as critical emission-related maintenance, nor that we approve as critical emission-related maintenance). Noncritical emission-related maintenance generally includes maintenance on the components we specify in 40 CFR part 1068, Appendix I, that is not covered in paragraph (a) of this section. You must state in the owners manual that these steps are not necessary to keep the emission-related warranty valid. If operators fail to do this maintenance, this does not allow you to disqualify those vehicles from in-use testing or deny a warranty claim. Do not take these inspection or maintenance steps during service accumulation on your emission-data vehicles.

(e) *Maintenance that is not emission-related.* For maintenance unrelated to emission controls, you may schedule any amount of inspection or maintenance. You may also take these inspection or maintenance steps during service accumulation on your emission-data vehicles, as long as they are reasonable and technologically necessary. You may perform this nonemission-related maintenance on emission-data vehicles at the least frequent intervals that you recommend to the ultimate purchaser (but not the intervals recommended for severe service).

(f) *Source of parts and repairs.* State clearly on the first page of your written maintenance instructions that a repair shop or person of the owner's choosing may maintain, replace, or repair emission control devices and systems. Your instructions may not require components or service identified by brand, trade, or corporate name. Also, do not directly or indirectly condition your warranty on a requirement that the vehicle be serviced by your franchised dealers or any other service establishments with which you have a commercial relationship. You may disregard the requirements in this paragraph (f) if you do one of two things:

(1) Provide a component or service without charge under the purchase agreement.

(2) Get us to waive this prohibition in the public's interest by convincing us the vehicle will work properly only with the identified component or service.

(g) [Reserved]

(h) *Owners manual.* Explain the owner's responsibility for proper maintenance in the owners manual.

(i) *Tire maintenance and replacement.* Include instructions that will enable the owner to replace tires so that the vehicle conforms to the original certified vehicle configuration.

#### **§ 1037.130 Assembly instructions for secondary vehicle manufacturers.**

(a) If you sell a certified incomplete vehicle to a secondary vehicle manufacturer, give the secondary vehicle manufacturer instructions for completing vehicle assembly consistent with the requirements of this part. Include all information necessary to ensure that the final vehicle assembly an engine will be in its certified configuration.

(b) Make sure these instructions have the following information:

(1) Include the heading: "Emission-related installation instructions".

(2) State: "Failing to follow these instructions when completing assembly of a heavy-duty motor vehicle violates federal law, subject to fines or other penalties as described in the Clean Air Act."

(3) Describe the necessary steps for installing any diagnostic system required under 40 CFR part 86.

(4) Describe how your certification is limited for any type of application, as illustrated in the following examples:

(i) If the incomplete vehicle is at or below 8,500 pounds GVWR, state that the vehicle's certification is valid under this part 1037 only if the final configuration has a vehicle curb weight above 6,000 pounds or basic vehicle frontal area above 45 square feet.

(ii) If your engine will be installed in a vehicle that you certify to meet diurnal emission standards using an evaporative canister, but you do not install the fuel tank, identify the maximum permissible fuel tank capacity if tank size affects compliance.

(5) Describe any other instructions to make sure the vehicle will operate according to design specifications in your application for certification.

(c) Provide instructions in writing or in an equivalent format. You may include this information with the incomplete vehicle document required by DOT. If you do not provide the instructions in writing, explain in your application for certification how you will ensure that each installer is informed of the installation requirements.

#### **§ 1037.135 Labeling.**

(a) Assign each vehicle a unique identification number and permanently

affix, engrave, or stamp it on the vehicle in a legible way. The vehicle identification number (VIN) serves this purpose.

(b) At the time of manufacture, affix a permanent and legible label identifying each vehicle. The label must be—

(1) Attached in one piece so it is not removable without being destroyed or defaced.

(2) Secured to a part of the vehicle needed for normal operation and not normally requiring replacement.

(3) Durable and readable for the vehicle's entire life.

(4) Written in English.

(c) The label must—

(1) Include the heading "VEHICLE EMISSION CONTROL INFORMATION".

(2) Include your full corporate name and trademark. You may identify another company and use its trademark instead of yours if you comply with the branding provisions of 40 CFR 1068.45.

(3) Include EPA's standardized designation for the vehicle family.

(4) State the regulatory subcategory that determines the applicable emission standards for the vehicle family (see definition in § 1037.801).

(5) State the date of manufacture [DAY (optional), MONTH, and YEAR]. You may omit this from the label if you stamp, engrave, or otherwise permanently identify it elsewhere on the vehicle, in which case you must also describe in your application for certification where you will identify the date on the vehicle.

(6) Identify the emission control system. Use terms and abbreviations as described in Appendix III to this part or other applicable conventions. Phase 2 tractors and Phase 2 vocational vehicles (other than those certified to standards for emergency vehicles) may omit this information.

(7) Identify any requirements for fuel and lubricants that do not involve fuel-sulfur levels.

(8) State: "THIS VEHICLE COMPLIES WITH U.S. EPA REGULATIONS FOR [MODEL YEAR] HEAVY-DUTY VEHICLES."

(9) If you rely on another company to design and install fuel tanks in incomplete vehicles that use an evaporative canister for controlling diurnal emissions, include the following statement: "THIS VEHICLE IS DESIGNED TO COMPLY WITH EVAPORATIVE EMISSION STANDARDS WITH UP TO × GALLONS OF FUEL TANK CAPACITY." Complete this statement by identifying the maximum specified

fuel tank capacity associated with your certification.

(d) You may add information to the emission control information label to identify other emission standards that the vehicle meets or does not meet (such as European standards). You may also add other information to ensure that the vehicle will be properly maintained and used.

(e) You may ask us to approve modified labeling requirements in this part 1037 if you show that it is necessary or appropriate. We will approve your request if your alternate label is consistent with the requirements of this part.

#### **§ 1037.140 Determining vehicle parameters.**

(a) Where applicable, a vehicle's roof height and a trailer's length are determined from nominal design specifications, as provided in this section. Specify design values for roof height and trailer length to the nearest inch.

(b) Base roof height on fully inflated tires having a static loaded radius equal to the arithmetic mean of the largest and smallest static loaded radius of tires you offer or a standard tire we approve.

(c) Base trailer length on the outer dimensions of the load-carrying structure. Do not include aerodynamic devices or HVAC units.

(d) The nominal design specifications must be within the range of the actual values from production vehicles considering normal production variability. In the case of roof height, use the mean tire radius specified in paragraph (b) of this section. If after production begins it is determined that your nominal design specifications do not represent production vehicles, we may require you to amend your application for certification under § 1037.225.

(e) If your vehicle is equipped with an adjustable roof fairing, measure the roof height with the fairing in its lowest setting.

(f) For any provisions in this part that depend on the number of axles on a vehicle, include lift axles or any other installed axles that can be used to carry the vehicle's weight while in motion.

#### **§ 1037.150 Interim provisions.**

The provisions in this section apply instead of other provisions in this part.

(a) *Incentives for early introduction.* The provisions of this paragraph (a) apply with respect to vehicles produced in model years before 2014. Manufacturers may voluntarily certify in model year 2013 (or earlier model years for electric vehicles) to the greenhouse gas standards of this part.

(1) This paragraph (a)(1) applies for regulatory subcategories subject to the standards of § 1037.105 or § 1037.106. Except as specified in paragraph (a)(3) of this section, to generate early credits under this paragraph for any vehicles other than electric vehicles, you must certify your entire U.S.-directed production volume within the regulatory subcategory to these standards. Except as specified in paragraph (a)(4) of this section, if some vehicle families within a regulatory subcategory are certified after the start of the model year, you may generate credits only for production that occurs after all families are certified. For example, if you produce three vehicle families in an averaging set and you receive your certificates for those families on January 4, 2013, March 15, 2013, and April 24, 2013, you may not generate credits for model year 2013 production in any of the families that occurs before April 24, 2013. Calculate credits relative to the standard that would apply in model year 2014 using the equations in subpart H of this part. You may bank credits equal to the surplus credits you generate under this paragraph (a) multiplied by 1.50. For example, if you have 1.0 Mg of surplus credits for model year 2013, you may bank 1.5 Mg of credits. Credit deficits for an averaging set prior to model year 2014 do not carry over to model year 2014. These credits may be used to show compliance with the standards of this part for 2014 and later model years. We recommend that you notify EPA of your intent to use this provision before submitting your applications.

(2) [Reserved]

(3) You may generate emission credits for the number of additional SmartWay designated tractors (relative to your 2012 production), provided you do not generate credits for those vehicles under paragraph (a)(1) of this section. Calculate credits for each regulatory subcategory relative to the standard that would apply in model year 2014 using the equations in subpart H of this part. Use a production volume equal to the number of designated model year 2013 SmartWay tractors minus the number of designated model year 2012 SmartWay tractors. You may bank credits equal to the surplus credits you generate under this paragraph (a)(3) multiplied by 1.50. Your 2012 and 2013 model years must be equivalent in length.

(4) This paragraph (a)(4) applies where you do not receive your final certificate in a regulatory subcategory within 30 days of submitting your final application for that subcategory. Calculate your credits for all production that occurs 30 days or more after you



submit your final application for the subcategory.

(b) *Interim standards for pickups and vans.* See 40 CFR part 86, subpart S, for interim standards that apply for certain heavy-duty pickups and vans.

(c) *Provisions for small manufacturers.* Standards apply on a delayed schedule for manufacturers meeting the small business criteria specified in 13 CFR 121.201. Apply the small business criteria for NAICS code 336120 for vocational vehicles and tractors and 336212 for trailers. Qualifying manufacturers are not subject to the greenhouse gas standards of §§ 1037.105 and 1037.106 for vehicles built before January 1, 2022. Similarly, qualifying manufacturers are not subject to the greenhouse gas standards of § 1037.107 for trailers built before January 1, 2019. In addition, qualifying manufacturers producing vehicles that run on any fuel other than gasoline, E85, or diesel fuel may delay complying with every new standard under this part by one model year. Qualifying manufacturers must notify the Designated Compliance Officer each model year before introducing these excluded vehicles into U.S. commerce. This notification must include a description of the manufacturer's qualification as a small business under 13 CFR 121.201. You must label your excluded vehicles with the following statement: "THIS VEHICLE IS EXCLUDED UNDER 40 CFR 1037.150(c)." Small businesses may certify their vehicles under this part 1037 before standards start to apply; however, they may generate emission credits only if they certify their entire U.S.-directed production volume within the applicable averaging set for that model year.

(d) *Air conditioning leakage for vocational vehicles.* The air conditioning leakage standard of § 1037.115 does not apply for model year 2020 and earlier vocational vehicles.

(e) [Reserved]

(f) *Electric vehicles.* All electric vehicles are deemed to have zero emissions of CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O. No emission testing is required for electric vehicles. Use good engineering judgment to apply other requirements of this part to electric vehicles.

(g) *Compliance date.* Compliance with the standards of this part was optional prior to January 1, 2014. This means that if your 2014 model year begins before January 1, 2014, you may certify for a partial model year that begins on January 1, 2014 and ends on the day your model year would normally end. You must label model year 2014

vehicles excluded under this paragraph (g) with the following statement: "THIS VEHICLE IS EXCLUDED UNDER 40 CFR 1037.150(g)."

(h) *Off-road vehicle exemption.* In unusual circumstances, vehicle manufacturers may ask us to exempt vehicles under § 1037.631 based on other criteria that are equivalent to those specified in § 1037.631(a). For example, we would normally not grant relief in cases where the vehicle manufacturer had credits or could otherwise comply with applicable standards. Request approval for the exemption before you produce the subject vehicles. Send your request with supporting information to the Designated Compliance Officer; we will coordinate with NHTSA in making a determination under § 1037.210. If you introduce into U.S. commerce vehicles that depend on our approval under this paragraph (h) before we inform you of our approval, those vehicles violate 40 CFR 1068.101(a)(1).

(i) *Credit multiplier for advanced technology.* If you generate credits from model year 2020 and earlier vehicles certified with advanced technology, you may multiply these credits by 1.50, except that you may not apply this multiplier in addition to the early-credit multiplier of paragraph (a) of this section.

(j) *Limited prohibition related to early model year engines.* The provisions of this paragraph (j) apply only for vehicles that have a date of manufacture before January 1, 2018. See § 1037.635 for related provisions that apply in later model years. The prohibition in § 1037.601 against introducing into U.S. commerce a vehicle containing an engine not certified to the standards applicable for the calendar year of installation does not apply for vehicles using model year 2014 or 2015 spark-ignition engines, or any model year 2013 or earlier engines.

(k) *Verifying drag areas from in-use vehicles.* This paragraph (k) applies instead of § 1037.401(b) through model year 2020. We may measure the drag area of your vehicles after they have been placed into service. To account for measurement variability, your vehicle is deemed to conform to the regulations of this part with respect to aerodynamic performance if we measure its drag area to be at or below the maximum drag area allowed for the bin above the bin to which you certified (for example, Bin II if you certified the vehicle to Bin III), unless we determine that you knowingly produced the vehicle to have a higher drag area than is allowed for the bin to which it was certified.

(l) *Optional sister-vehicle certification under 40 CFR part 86.* You may certify

certain complete or cab-complete vehicles to the GHG standards of 40 CFR 86.1819 instead of the standards of § 1037.105 as specified in 40 CFR 86.1819–14(j).

(m) *Loose engine sales.* Manufacturers may certify certain model year 2020 and earlier spark-ignition engines to emission standards under 40 CFR 1036.108 where they are identical to engines used in vehicles certified to the standards of 40 CFR 86.1819. Vehicles in which those engines are installed are subject to standards under this part as specified in § 1037.105. See 40 CFR 86.1819–14(k)(8).

(n) *Streamlined preliminary approval for trailer devices.* Before January 1, 2018, manufacturers of aerodynamic devices for trailers may ask for preliminary EPA approval of compliance data for their devices based on qualifying for designation under the SmartWay program based on measured C<sub>D</sub>A values, whether or not that involves testing or other methods specified in § 1037.525. Trailer manufacturers may certify based on delta C<sub>D</sub>A values established under this paragraph (n) through model year 2020. Manufacturers must perform testing as specified in subpart F of this part for any vehicles or aerodynamic devices not qualifying for approval under this paragraph (n).

(o) *Phase 1 coastdown procedures.* For tractors subject to Phase 1 standards under § 1037.106, the default method for measuring drag area (C<sub>D</sub>A) is the coastdown procedure specified in 40 CFR part 1066, subpart D. This includes preparing the tractor and the standard trailer with wheels meeting specifications of § 1037.527(b) and submitting information related to your coastdown testing under § 1037.527(h).

(p) *ABT reports.* Through model year 2017, you may submit a final report under § 1037.730 up to 270 days after the end of the model year, as long as you send a draft report with the same information within 90 days after the end of the model year.

(q) *Vehicle families for advanced and off-cycle technologies.* For vocational vehicles and tractors subject to Phase 1 standards, create separate vehicle families for vehicles that contain advanced or off-cycle technologies; group those vehicles together in a vehicle family if they use the same advanced or off-cycle technologies.

(r) *Limited carryover from Phase 1 to Phase 2.* The provisions for carryover data in § 1037.235(d) do not allow you to use aerodynamic test results from Phase 1 to support a compliance demonstration for Phase 2 certification.

(s) *Interim useful life for light heavy-duty vocational vehicles.* Class 2b through Class 5 vocational vehicles certified to Phase 1 standards are subject to a useful life of 110,000 miles or 10 years, whichever comes first, instead of the useful life specified in § 1037.105. For emission credits generated from these Phase 1 vehicles, multiply any banked credits that you carry forward to demonstrate compliance with Phase 2 standards by 1.36.

### Subpart C—Certifying Vehicle Families

#### § 1037.201 General requirements for obtaining a certificate of conformity.

(a) You must send us a separate application for a certificate of conformity for each vehicle family. A certificate of conformity is valid from the indicated effective date until the end of the model year for which it is issued, which may not extend beyond December 31 of that year. You must renew your certification annually for any vehicles you continue to produce.

(b) The application must contain all the information required by this part and must not include false or incomplete statements or information (see § 1037.255).

(c) We may ask you to include less information than we specify in this subpart, as long as you maintain all the information required by § 1037.250.

(d) You must use good engineering judgment for all decisions related to your application (see 40 CFR 1068.5).

(e) An authorized representative of your company must approve and sign the application.

(f) See § 1037.255 for provisions describing how we will process your application.

(g) We may perform confirmatory testing on your vehicles; for example, we may test vehicles to verify drag areas or other GEM inputs. This includes tractors used to determine  $F_{alt-aero}$  under § 1037.525. We may require you to deliver your test vehicles or components to a facility we designate for our testing. Alternatively, you may choose to deliver another vehicle or component that is identical in all material respects to the test vehicle or component, or a different vehicle or component that we determine can appropriately serve as an emission-data vehicle for the family. We may perform confirmatory testing on engines under 40 CFR part 1036 and may require you to apply modified fuel maps from that testing for certification under this part.

(h) The certification and testing provisions of 40 CFR part 86, subpart S, apply instead of the provisions of this subpart relative to the evaporative and

refueling emission standards specified in § 1037.103, except that § 1037.245 describes how to demonstrate compliance with evaporative emission standards.

(i) Vehicles and installed engines must meet exhaust, evaporative, and refueling emission standards and certification requirements in 40 CFR part 86 or 40 CFR part 1036, as applicable. Include the information described in 40 CFR part 86, subpart S, or 40 CFR 1036.205 in your application for certification in addition to what we specify in § 1037.205 so we can issue a single certificate of conformity for all the requirements that apply for your vehicle and the installed engine.

#### § 1037.205 What must I include in my application?

This section specifies the information that must be in your application, unless we ask you to include less information under § 1037.201(c). We may require you to provide additional information to evaluate your application. References to testing and emission-data vehicles refer to testing vehicles or components to measure any quantity that serves as an input value for modeling emission rates under § 1037.515 or 1037.520.

(a) Describe the vehicle family's specifications and other basic parameters of the vehicle's design and emission controls. List the fuel type on which your vocational vehicles and tractors are designed to operate (for example, ultra low-sulfur diesel fuel).

(b) Explain how the emission control system operates. As applicable, describe in detail all system components for controlling greenhouse gas emissions, including all auxiliary emission control devices (AECs) and all fuel-system components you will install on any production vehicle. Identify the part number of each component you describe. For this paragraph (b), treat as separate AECs any devices that modulate or activate differently from each other. Also describe your modeling inputs as described in §§ 1037.515 and 1037.520, with the following additional information if it applies for your vehicles:

(1) Describe your design for vehicle speed limiters, consistent with § 1037.640.

(2) Describe your design for predictive cruise control.

(3) Describe your design for automatic engine shutdown systems, consistent with § 1037.660.

(4) Describe your engineering analysis demonstrating that your air conditioning compressor qualifies as a high-efficiency model as described in 40 CFR 86.1868–12(h)(5).

(5) Describe your design for stop-start technology, including the logic for engine shutdown and the maximum duration of engine operation after the onset of any vehicle conditions described in § 1037.520(f)(8)(iii).

(6) If you perform powertrain testing under § 1037.550, report both CO<sub>2</sub> and NO<sub>x</sub> emission levels corresponding to each test run.

(7) Include measurements for vehicles with hybrid power take-off systems.

(c) For vehicles subject to air conditioning standards, include:

(1) The refrigerant leakage rates (leak scores).

(2) The type of refrigerant and the refrigerant capacity of the air conditioning systems.

(3) The corporate name of the final installer of the air conditioning system.

(d) Describe any vehicles you selected for testing and the reasons for selecting them.

(e) Describe any test equipment and procedures that you used, including any special or alternate test procedures you used (see § 1037.501). Include information describing the procedures you used to determine C<sub>D</sub>A values for tractors and trailers as specified in § 1037.525.

(f) Describe how you operated any emission-data vehicle before testing, including the duty cycle and the number of vehicle operating miles used to stabilize emission-related performance. Explain why you selected the method of service accumulation. Describe any scheduled maintenance you did.

(g) Where applicable, list the specifications of any test fuel to show that it falls within the required ranges we specify in 40 CFR part 1065.

(h) Identify the vehicle family's useful life.

(i) Include the maintenance instructions and warranty statement you will give to the ultimate purchaser of each new vehicle (see §§ 1037.120 and 1037.125).

(j) Describe your emission control information label (see § 1037.135).

(k) Identify the emission standards or FELs to which you are certifying vehicles in the vehicle family. For families containing multiple subfamilies, this means that you must identify multiple CO<sub>2</sub> FELs. For example, you may identify the highest and lowest FELs to which any of your subfamilies will be certified and also list all possible FELs in between (which will be in 1 g/ton-mile increments).

(l) Where applicable, identify the vehicle family's deterioration factors and describe how you developed them.

Present any emission test data you used for this (see § 1037.241(c)).

(m) Where applicable, state that you operated your emission-data vehicles as described in the application (including the test procedures, test parameters, and test fuels) to show you meet the requirements of this part.

(n) [Reserved]

(o) Report calculated and modeled emission results as follows:

(1) For vocational vehicles and tractors, report modeling results for ten configurations. Include modeling inputs and detailed descriptions of how they were derived. Unless we specify otherwise, include the configuration with the highest modeling result, the lowest modeling result, and the configurations with the highest projected sales.

(2) For trailers that demonstrate compliance with g/ton-mile emission standards as described in § 1037.515, report CO<sub>2</sub> emission results for the configurations with the highest and lowest calculated values, and for the configuration with the highest projected sales.

(p) Where applicable, describe all adjustable operating parameters (see § 1037.115), including production tolerances. You do not need to include parameters that do not affect emissions covered by your application. Include the following in your description of each parameter:

(1) The nominal or recommended setting.

(2) The intended physically adjustable range.

(3) The limits or stops used to establish adjustable ranges.

(4) Information showing why the limits, stops, or other means of inhibiting adjustment are effective in preventing adjustment of parameters on in-use vehicles to settings outside your intended physically adjustable ranges.

(q) [Reserved]

(r) Unconditionally certify that all the vehicles in the vehicle family comply with the requirements of this part, other referenced parts of the CFR, and the Clean Air Act.

(s) Include good-faith estimates of U.S.-directed production volumes by subfamily. We may require you to describe the basis of your estimates.

(t) Include the information required by other subparts of this part. For example, include the information required by § 1037.725 if you plan to generate or use emission credits.

(u) Include other applicable information, such as information specified in this part or 40 CFR part 1068 related to requests for exemptions.

(v) Name an agent for service located in the United States. Service on this

agent constitutes service on you or any of your officers or employees for any action by EPA or otherwise by the United States related to the requirements of this part.

#### **§ 1037.210 Preliminary approval before certification.**

If you send us information before you finish the application, we may review it and make any appropriate determinations. Decisions made under this section are considered to be preliminary approval, subject to final review and approval. We will generally not reverse a decision where we have given you preliminary approval, unless we find new information supporting a different decision. If you request preliminary approval related to the upcoming model year or the model year after that, we will make best-efforts to make the appropriate determinations as soon as practicable. We will generally not provide preliminary approval related to a future model year more than two years ahead of time.

#### **§ 1037.211 Preliminary approval for manufacturers of aerodynamic devices.**

(a) If you design or manufacture aerodynamic devices for trailers, you may ask us to provide preliminary approval for the measured performance of your devices. While decisions made under this section are considered to be preliminary approval, we will not reverse a decision where we have given you preliminary approval, unless we find new information supporting a different decision. For example, where we measure the performance of your device after giving you preliminary approval and its measured performance is less than your data indicated, we may rescind the preliminary approval of your test results.

(b) To request this, you must provide test data for delta  $C_D A$  values as specified in § 1037.150(n) or § 1037.525. Trailer manufacturers may use approved delta  $C_D A$  values as inputs under § 1037.515 to support their application for certification.

(c) The following provisions apply for combining multiple devices under this section for the purpose of certifying trailers:

(1) If the device manufacturer establishes a delta  $C_D A$  value in a single test with multiple aerodynamic devices installed, trailer manufacturers may use that delta  $C_D A$  value directly for the same combination of aerodynamic devices installed on production trailers.

(2) Trailer manufacturers may combine delta  $C_D A$  values for aerodynamic devices that are not tested together, as long as each device does not

significantly impair the effectiveness of another, consistent with good engineering judgment. To approximate the overall benefit of multiple devices, calculate a composite delta  $C_D A$  value for multiple aerodynamic devices by applying the full delta  $C_D A$  value for the device with the greatest aerodynamic improvement, adding the second-highest delta  $C_D A$  value multiplied by 0.9, and adding any other delta  $C_D A$  values multiplied by 0.8.

#### **§ 1037.220 Amending maintenance instructions.**

You may amend your emission-related maintenance instructions after you submit your application for certification as long as the amended instructions remain consistent with the provisions of § 1037.125. You must send the Designated Compliance Officer a written request to amend your application for certification for a vehicle family if you want to change the emission-related maintenance instructions in a way that could affect emissions. In your request, describe the proposed changes to the maintenance instructions. If operators follow the original maintenance instructions rather than the newly specified maintenance, this does not allow you to disqualify those vehicles from in-use testing or deny a warranty claim.

(a) If you are decreasing or eliminating any specified maintenance, you may distribute the new maintenance instructions to your customers 30 days after we receive your request, unless we disapprove your request. This would generally include replacing one maintenance step with another. We may approve a shorter time or waive this requirement.

(b) If your requested change would not decrease the specified maintenance, you may distribute the new maintenance instructions anytime after you send your request. For example, this paragraph (b) would cover adding instructions to increase the frequency of filter changes for vehicles in severe-duty applications.

(c) You need not request approval if you are making only minor corrections (such as correcting typographical mistakes), clarifying your maintenance instructions, or changing instructions for maintenance unrelated to emission control. We may ask you to send us copies of maintenance instructions revised under this paragraph (c).

#### **§ 1037.225 Amending applications for certification.**

Before we issue you a certificate of conformity, you may amend your application to include new or modified

vehicle configurations, subject to the provisions of this section. After we have issued your certificate of conformity, but before the end of the model year, you may send us an amended application requesting that we include new or modified vehicle configurations within the scope of the certificate, subject to the provisions of this section. Before the end of the model year, you must amend your application if any changes occur with respect to any information that is included or should be included in your application. After the end of the model year, you may amend your application only to update maintenance instructions as described in § 1037.220 or to modify an FEL as described in paragraph (f) of this section.

(a) You must amend your application before you take any of the following actions:

(1) Add a vehicle configuration to a vehicle family. In this case, the vehicle configuration added must be consistent with other vehicle configurations in the vehicle family with respect to the criteria listed in § 1037.230.

(2) Change a vehicle configuration already included in a vehicle family in a way that may affect emissions, or change any of the components you described in your application for certification. This includes production and design changes that may affect emissions any time during the vehicle's lifetime.

(3) Modify an FEL for a vehicle family as described in paragraph (f) of this section.

(b) To amend your application for certification, send the relevant information to the Designated Compliance Officer.

(1) Describe in detail the addition or change in the vehicle model or configuration you intend to make.

(2) Include engineering evaluations or data showing that the amended vehicle family complies with all applicable requirements. You may do this by showing that the original emission-data vehicle is still appropriate for showing that the amended family complies with all applicable requirements.

(3) If the original emission-data vehicle or emission modeling for the vehicle family is not appropriate to show compliance for the new or modified vehicle configuration, include new test data or emission modeling showing that the new or modified vehicle configuration meets the requirements of this part.

(4) Include any other information needed to make your application correct and complete.

(c) We may ask for more test data or engineering evaluations. You must give us these within 30 days after we request them.

(d) For vehicle families already covered by a certificate of conformity, we will determine whether the existing certificate of conformity covers your newly added or modified vehicle. You may ask for a hearing if we deny your request (see § 1037.820).

(e) For vehicle families already covered by a certificate of conformity, you may start producing the new or modified vehicle configuration anytime after you send us your amended application and before we make a decision under paragraph (d) of this section. However, if we determine that the affected vehicles do not meet applicable requirements, we will notify you to cease production of the vehicles and may require you to recall the vehicles at no expense to the owner. Choosing to produce vehicles under this paragraph (e) is deemed to be consent to recall all vehicles that we determine do not meet applicable emission standards or other requirements and to remedy the nonconformity at no expense to the owner. If you do not provide information required under paragraph (c) of this section within 30 days after we request it, you must stop producing the new or modified vehicles.

(f) You may ask us to approve a change to your FEL in certain cases after the start of production. The changed FEL may not apply to vehicles you have already introduced into U.S. commerce, except as described in this paragraph (f). You may ask us to approve a change to your FEL in the following cases:

(1) You may ask to raise your FEL for your vehicle subfamily at any time. In your request, you must show that you will still be able to meet the emission standards as specified in subparts B and H of this part. Use the appropriate FELs with corresponding production volumes to calculate emission credits for the model year, as described in subpart H of this part.

(2) Where testing applies, you may ask to lower the FEL for your vehicle subfamily only if you have test data from production vehicles showing that emissions are below the proposed lower FEL. Otherwise, you may ask to lower your FEL for your vehicle subfamily at any time. The lower FEL applies only to vehicles you produce after we approve the new FEL. Use the appropriate FELs with corresponding production volumes to calculate emission credits for the model year, as described in subpart H of this part.

(3) You may ask to add an FEL for your vehicle family at any time.

#### **§ 1037.230 Vehicle families, sub-families, and configurations.**

(a) For purposes of certifying your vehicles to greenhouse gas standards, divide your product line into families of vehicles based on regulatory subcategories as specified in this section. Subcategories are specified using terms defined in § 1037.801. Your vehicle family is limited to a single model year.

(1) Apply subcategories for vocational vehicles and vocational tractors as shown in Table 1 of this section. This involves 21 separate subcategories for Phase 2 vehicles to account for engine type, GVWR, and the vehicle characteristics corresponding to the duty cycles for vocational vehicles as specified in § 1037.510; three separate subcategories apply for emergency vehicles as described in § 1037.105(b)(4). Divide Phase 1 vehicles into three GVWR-based vehicle classes as shown in Table 1 of this section, disregarding additional specified characteristics. Table 1 follows:

TABLE 1 OF § 1037.230—VOCATIONAL VEHICLE SUBCATEGORIES

Engine type	Class 2b–5	Class 6–7	Class 8
Compression-ignition .....	Urban .....	Urban .....	Urban.
	Multi-Purpose .....	Multi-Purpose .....	Multi-Purpose.
	Regional .....	Regional .....	Regional.
Spark-ignition .....	Urban .....	Urban .....	Urban.
	Multi-Purpose .....	Multi-Purpose .....	Multi-Purpose.
	Regional .....	Regional .....	Regional.
All .....	Emergency .....	Emergency .....	Emergency.

(2) Apply subcategories for tractors (other than vocational tractors) as shown in the following table:

TABLE 2 OF § 1037.230—TRACTOR SUBCATEGORIES

Class 7	Class 8	
Low-roof tractors .....	Low-roof day cabs .....	Low-roof sleeper cabs.
Mid-roof tractors .....	Mid-roof day cabs .....	Mid-roof sleeper cabs.
High-roof tractors .....	High-roof day cabs .....	High-roof sleeper cabs.
Heavy-haul tractors (starting with Phase 2)		

(3) Apply subcategories for trailers as shown in the following table:

TABLE 3 OF § 1037.230—TRAILER SUBCATEGORIES

Full-aero trailers	Partial-aero trailers <sup>a</sup>	Other trailers
Long dry box vans .....	Long dry box vans .....	Non-aero trailers. Non-box trailers.
Short dry box vans .....	Short dry box vans .....	
Long refrigerated box vans .....	Long refrigerated box vans .....	
Short refrigerated box vans .....	Short refrigerated box vans .....	

<sup>a</sup> The partial-aero subcategories do not apply before model year 2027.

(b) If the vehicles in your family are being certified to more than one FEL, subdivide your greenhouse gas vehicle families into subfamilies that include vehicles with identical FELs. Note that you may add subfamilies at any time during the model year.

(c) Group vehicles into configurations consistent with the definition of “vehicle configuration” in § 1037.801. Note that vehicles with hardware or software differences that are related to measured or modeled emissions are considered to be different vehicle configurations even if they have the same modeling inputs and FEL. Note also, that you are not required to separately identify all configurations for certification. See paragraph (g) of this section for provisions allowing you to group certain hardware differences into the same configuration. Note that you are not required to identify all possible configurations for certification; also, you are required to include in your final report only those configurations you produced.

(d) You may combine dissimilar vehicles into a single vehicle family in special circumstances as follows:

(1) For a vehicle model that includes a range of GVWR values that straddle weight classes, you may include all the vehicles in the same vehicle family if you certify the vehicle family to the numerically lower CO<sub>2</sub> emission standard from the affected weight classes. Vehicles that are optionally certified to a more stringent under this paragraph (d)(1) are subject to useful-life and all other provisions corresponding

to the weight class with the numerically lower CO<sub>2</sub> emission standard.

(2) You may include refrigerated box vans in a vehicle family with dry box vans; if you do this, all the trailers in the family are subject to the standards that apply for dry box vans. Similarly, you may include short trailers in a vehicle family with long trailers; if you do this, all the trailers in the family are subject to the standards that apply for long dry box vans. You may also include short refrigerated box vans in a vehicle family with long dry box vans; if you do this, all the trailers in the family are subject to the standards that apply for long dry box vans.

(e) You may divide your families into more families than specified in this section.

(f) You may ask us to allow you to group into the same configuration vehicles that have very small body hardware differences that do not significantly affect drag areas. Note that this allowance does not apply for substantial differences, even if the vehicles have the same measured drag areas.

#### § 1037.231 Powertrain families.

(a) If you choose to perform powertrain testing as specified in § 1037.550, use good engineering judgment to divide your product line into powertrain families that are expected to have similar fuel consumptions and CO<sub>2</sub> emission characteristics throughout the useful life. Your powertrain family is limited to a single model year.

(b) Except as specified in paragraph (c) of this section, group powertrains in the same powertrain family if they share all the following attributes:

- (1) Engine family.
  - (2) The applicable simulated test vehicle category according to § 1037.550(f): Either Class 2b through 7, heavy-haul or Class 8 other than heavy-haul.
  - (3) Number of clutches.
  - (4) Type of clutch (*e.g.*, wet or dry).
  - (5) Presence and location of a fluid coupling such as a torque converter.
  - (6) Gear configuration, as follows:
    - (i) Planetary (*e.g.*, simple, compound, meshed-planet, stepped-planet, multi-stage).
    - (ii) Countershaft (*e.g.*, single, double, triple).
    - (iii) Continuously variable (*e.g.*, pulley, magnetic, toroidal).
  - (7) Number of available forward gears, and transmission gear ratio for each available forward gear, if applicable.
  - (8) Transmission oil sump configuration (*e.g.*, conventional or dry).
  - (9) The power transfer configuration of any hybrid technology (*e.g.*, series or parallel).
  - (10) The energy storage device and capacity of any hybrid technology (*e.g.*, 10 MJ hydraulic accumulator, 10 kW·hr Lithium-ion battery pack, 10 MJ ultracapacitor bank).
  - (11) The rated output of any hybrid mechanical power technology (*e.g.*, 50 kW electric motor).
- (c) For powertrains that share all the attributes described in paragraph (b) of this section, divide them further into

separate powertrain families based on common calibration attributes. Group powertrains in the same powertrain family to the extent that powertrain test results and corresponding emission levels are expected to be similar throughout the useful life.

(d) You may subdivide a group of powertrains with shared attributes under paragraph (b) of this section into different powertrain families.

(e) In unusual circumstances, you may group powertrains into the same powertrain family even if they do not have shared attributes under in paragraph (b) of this section if you show that their emission characteristics throughout the useful life will be similar.

(f) If you include the axle when performing powertrain testing for the family, you must limit the family to include only those axles represented by the test results. You may include multiple axle ratios in the family if you test with the axle expected to produce the highest emission results.

#### **§ 1037.235 Testing requirements for certification.**

This section describes the emission testing you must perform to show compliance with respect to the greenhouse gas emission standards in subpart B of this part, and to determine any input values from §§ 1037.515 and 1037.520 that involve measured quantities.

(a) Select emission-data vehicles that represent production vehicles and components for the vehicle family consistent with the specifications in §§ 1037.205(o), 1037.515, and 1037.520. Where the test results will represent multiple vehicles or components with different emission performance, use good engineering judgment to select worst-case emission data vehicles. In the case of powertrain testing under § 1037.550, select a test engine and test transmission by considering the whole range of vehicle models covered by the powertrain family and the mix of duty cycles specified in § 1037.510.

(b) Test your emission-data vehicles (including emission-data components) using the procedures and equipment specified in subpart F of this part. Measure emissions (or other parameters, as applicable) using the specified procedures.

(c) We may measure emissions (or other parameters, as applicable) from any of your emission-data vehicles.

(1) We may decide to do the testing at your plant or any other facility. If we do this, you must deliver the vehicle or component to a test facility we designate. The vehicle or component

you provide must be in a configuration that is suitable for testing. If we do the testing at your plant, you must schedule it as soon as possible and make available the instruments, personnel, and equipment we need.

(2) If we measure emissions (or other parameters, as applicable) from your vehicle or component, the results of that testing become the official emission results for the vehicle or component. Note that changing the official emission result does not necessarily require a change in the declared modeling input value. Unless we later invalidate these data, we may decide not to consider your data in determining if your vehicle family meets applicable requirements. This applies equally to individual data points from powertrain testing under § 1037.550 or § 1037.551, except that the results of our testing do not become the official emission result if our results are lower than your reported test results.

(3) Before we test one of your vehicles or components, we may set its adjustable parameters to any point within the physically adjustable ranges, if applicable.

(4) Before we test one of your vehicles or components, we may calibrate it within normal production tolerances for anything we do not consider an adjustable parameter. For example, this would apply for a vehicle parameter that is subject to production variability because it is adjustable during production, but is not considered an adjustable parameter (as defined in § 1037.801) because it is permanently sealed. For parameters that relate to a level of performance that is itself subject to a specified range (such as maximum power output), we will generally perform any calibration under this paragraph (c)(4) in a way that keeps performance within the specified range.

(d) You may ask to use carryover data for a vehicle or component from a previous model year instead of doing new tests if the applicable emission-data vehicle from the previous model year remains the appropriate emission-data vehicle under paragraph (b) of this section.

(e) We may require you to test a second vehicle or component of the same configuration in addition to the vehicle or component tested under paragraph (a) of this section.

(f) If you use an alternate test procedure under 40 CFR 1065.10 and later testing shows that such testing does not produce results that are equivalent to the procedures specified in subpart F of this part, we may reject data you generated using the alternate procedure.

#### **§ 1037.241 Demonstrating compliance with exhaust emission standards for greenhouse gas pollutants.**

(a) For purposes of certification, your vehicle family is considered in compliance with the CO<sub>2</sub> emission standards in §§ 1037.105 through 1037.107 if all vehicle configurations in that family have calculated or modeled CO<sub>2</sub> emission rates from § 1037.515 or § 1037.520 that are at or below the applicable standards. Note that FELs are considered to be the applicable emission standards with which you must comply if you participate in the ABT program in subpart H of this part. Your vehicle family is deemed not to comply if any vehicle configuration in that family has a calculated or modeled CO<sub>2</sub> emission rate that is above the applicable standard.

(b) In the case of trailer certification that does not rely on calculated CO<sub>2</sub> emission rates, your vehicle family is considered in compliance with the emission standards if all vehicle configurations in that family meet specified design standards and have TRRL values at or below the specified standard. Your family is deemed not to comply for certification if any trailer does not meet specified design standards or if any vehicle configuration in that family has a measured TRRL value above the specified standard.

(c) We may require you to provide an engineering analysis showing that the performance of your emission controls will not deteriorate during the useful life with proper maintenance. If we determine that your emission controls are likely to deteriorate during the useful life, we may require you to develop and apply deterioration factors consistent with good engineering judgment. For example, you may need to apply a deterioration factor to address deterioration of battery performance for a hybrid electric vehicle. Where the highest useful life emissions occur between the end of useful life and at the low-hour test point, base deterioration factors for the vehicles on the difference between (or ratio of) the point at which the highest emissions occur and the low-hour test point.

#### **§ 1037.243 Demonstrating compliance with evaporative emission standards.**

(a) For purposes of certification, your vehicle family is considered in compliance with the evaporative emission standards in subpart B of this part if you prepare an engineering analysis showing that your vehicles in the family will comply with applicable standards throughout the useful life, and there are no test results from an emission-data vehicle representing the

family that exceed an emission standard.

(b) Your evaporative emission family is deemed not to comply if your engineering analysis is not adequate to show that all the vehicles in the family will comply with applicable emission standards throughout the useful life, or if a test result from an emission-data vehicle representing the family exceeds an emission standard.

(c) To compare emission levels with emission standards, apply deterioration factors to the measured emission levels. Establish an additive deterioration factor based on an engineering analysis that takes into account the expected aging from in-use vehicles.

(d) Apply the deterioration factor to the official emission result, as described in paragraph (c) of this section, then round the adjusted figure to the same number of decimal places as the emission standard. Compare the rounded emission levels to the emission standard for each emission-data vehicle.

(e) Your analysis to demonstrate compliance with emission standards must take into account your design strategy for vehicles that require testing. Specifically, vehicles above 14,000 pounds GVWR are presumed to need the same technologies that are required for heavy-duty vehicles at or below 14,000 pounds GVWR. Similarly, your analysis to establish a deterioration factor must take into account your testing to establish deterioration factors for smaller vehicles.

#### **§ 1037.250 Reporting and recordkeeping.**

(a) Within 90 days after the end of the model year, send the Designated Compliance Officer a report including the total U.S.-directed production volume of vehicles you produced in each vehicle family during the model year (based on information available at the time of the report). Report by vehicle identification number and vehicle configuration and identify the subfamily identifier. Report uncertified vehicles sold to secondary vehicle manufacturers. Small manufacturers may omit the reporting requirements of this paragraph (a).

(b) Organize and maintain the following records:

(1) A copy of all applications and any summary information you send us.

(2) Any of the information we specify in § 1037.205 that you were not required to include in your application.

(3) A detailed history of each emission-data vehicle (including emission-related components), if applicable.

(4) Production figures for each vehicle family divided by assembly plant.

(5) Keep a list of vehicle identification numbers for all the vehicles you produce under each certificate of conformity. Also identify the technologies that make up the certified configuration for each vehicle you produce.

(c) Keep required data from emission tests and all other information specified in this section for eight years after we issue your certificate. If you use the same emission data or other information for a later model year, the eight-year period restarts with each year that you continue to rely on the information.

(d) Store these records in any format and on any media, as long as you can promptly send us organized, written records in English if we ask for them. You must keep these records readily available. We may review them at any time.

(e) If you fail to properly keep records or to promptly send us information as required under this part, we may require that you submit the information specified in this section after each calendar quarter, and we may require that you routinely send us information that the regulation requires you to submit only if we request it. If we find that you are fraudulent or grossly negligent or otherwise act in bad faith regarding information reporting and recordkeeping, we may require that you send us a detailed description of the certified configuration for each vehicle before you produce it.

#### **§ 1037.255 What decisions may EPA make regarding my certificate of conformity?**

(a) If we determine your application is complete and shows that the vehicle family meets all the requirements of this part and the Act, we will issue a certificate of conformity for your vehicle family for that model year. We may make the approval subject to additional conditions.

(b) We may deny your application for certification if we determine that your vehicle family fails to comply with emission standards or other requirements of this part or the Clean Air Act. We will base our decision on all available information. If we deny your application, we will explain why in writing.

(c) In addition, we may deny your application or suspend or revoke your certificate if you do any of the following:

(1) Refuse to comply with any testing or reporting requirements.

(2) Submit false or incomplete information (paragraph (e) of this section applies if this is fraudulent). This includes doing anything after submission of your application to

render any of the submitted information false or incomplete.

(3) Render any test data inaccurate.

(4) Deny us from completing authorized activities (see 40 CFR 1068.20). This includes a failure to provide reasonable assistance.

(5) Produce vehicles for importation into the United States at a location where local law prohibits us from carrying out authorized activities.

(6) Fail to supply requested information or amend your application to include all vehicles being produced.

(7) Take any action that otherwise circumvents the intent of the Act or this part, with respect to your vehicle family.

(d) We may void the certificate of conformity for a vehicle family if you fail to keep records, send reports, or give us information as required under this part or the Act. Note that these are also violations of 40 CFR 1068.101(a)(2).

(e) We may void your certificate if we find that you intentionally submitted false or incomplete information. This includes rendering submitted information false or incomplete after submission.

(f) If we deny your application or suspend, revoke, or void your certificate, you may ask for a hearing (see § 1037.820).

### **Subpart D—Testing Production Vehicles and Engines**

#### **§ 1037.301 Measurements related to GEM inputs in a selective enforcement audit.**

(a) We may require you to perform selective enforcement audits under 40 CFR part 1068, subpart E, with respect to any GEM inputs in your application for certification. This section describes how this applies uniquely in certain circumstances.

(b) A selective enforcement audit consist of performing measurements with production vehicles relative to one or more declared values for GEM inputs, and using those measured values in place of your declared values to run GEM. The vehicle is considered passing if the new modeled emission result is at or below the modeled emission result corresponding to the declared GEM inputs. If you have reported an FEL for the vehicle configuration prior to the start of the audit, we will instead consider the vehicle passing if the new cycle-weighted emission result is at or below the FEL.

(c) For vehicles certified based on powertrain testing as specified in § 1037.550, we may apply the selective enforcement audit requirements to the powertrain. If engine manufacturers perform the powertrain testing and



include those results in their certification under 40 CFR part 1036, they are responsible for selective enforcement audits related to those results. Otherwise, the certificate holder for the vehicle is responsible for the selective enforcement audit.

(1) A selective enforcement audit for powertrains would generally consist of performing a test with the complete powertrain (engine and transmission together). We may alternatively allow you to test the engine on a dynamometer with no installed transmission as described in § 1037.551.

(2) Recreate a set of test results for each of three separate powertrains. Generate weighted GEM results for each of ten separate configurations for each of the three selected powertrains. Each unique test run for a given configuration with a particular powertrain constitutes a separate test for purposes of evaluating whether the vehicle family meets the pass-fail criteria under 40 CFR 1068.420. The test result for a single test run in the audit is considered passing if it is at or below the value selected as an input for GEM. Perform testing with up to ten separate configurations for additional powertrains as needed to reach a pass-fail decision under 40 CFR 1068.240. For example, testing three powertrains over each of ten separate test runs would represent 30 tests; the family would have a pass result if 13 or fewer of the 30 tests are failing, and the family would have a fail result if 19 or more of the 30 tests are failing, and testing with an additional powertrain would be required if 14–18 of the 30 tests are failing. In the case of testing engines to simulate powertrain testing, apply the provisions of this paragraph (c)(2) based on separately simulated powertrains and vehicle configurations.

(d) To perform a selective enforcement audit with respect to drag area, use the same method you used for certification; we may instead require you to use the reference method specified in § 1037.525. For this paragraph (d), all measurements for tractors must include  $F_{\text{alt-aero}}$  and adjustments to account for wind-averaged drag as applicable under § 1037.525. The following provisions apply instead of 40 CFR 1068.420 for a selective enforcement audit with respect to drag area:

(1) Determine whether or not a vehicle fails to meet standards as follows:

(i) For tractors, a failed vehicle is one whose measured drag area exceeds the maximum drag area corresponding to the bin you identified in your application for certification.

(ii) For trailers, a failed vehicle is a failed vehicle is one whose delta  $C_{DA}$  based on measured values is less than the minimum drag area corresponding to the bin you identified in your application for certification.

(2) Measure drag area for a minimum of two vehicles. If one of those vehicles fails, measure drag area for two additional vehicles from the vehicle family. If both of those vehicles fail, measure drag area for four additional vehicles from the vehicle family. You may perform testing on additional vehicles.

(3) Determine whether a vehicle family passes or fails the audit as follows:

(i) For tractors, you reach a pass decision for the audit if the arithmetic average value of the drag area for all tested vehicles is at or below the maximum value corresponding to the bin you identified in your application for certification. You reach a fail decision for the audit if this average value is above the maximum value corresponding to the bin you identified in your application for certification.

(ii) For trailers, you reach a pass decision for the audit if the arithmetic average value of delta  $C_{DA}$  is at or above the minimum value corresponding to the bin you identified in your application for certification. You reach a fail decision for the audit if this average value is below the minimum value corresponding to the bin you identified in your application for certification.

(4) In the case of trailer certification that relies on data from a device manufacturer under § 1037.211, we may require the device manufacturer to perform a selective enforcement audit as described in this paragraph (d). Our test order will establish the equivalent of a vehicle family for performing tests for the audit. If the audit leads to a fail result for the family, we may revoke our approval under § 1037.211 as that relates to any future application for certification.

(5) If we test some of your vehicles in addition to your testing, we may decide not to include your test results as official data for those vehicles if there is substantial disagreement between your testing and our testing. We will reinstate your data as valid if you show us that we made an error and your data are correct. If we perform testing, we may choose to stop testing after any number of tests.

(6) If we rely on our test data instead of yours, we will notify you in writing of our decision and the reasons we believe your facility is not appropriate for doing the tests we require under this

paragraph (c). You may request in writing that we consider your test results from the same facility for future testing if you show us that you have made changes to resolve the problem.

(7) We may allow you to perform additional replicate tests with a given vehicle to reduce measurement variability, consistent with good engineering judgment.

(e) Selective enforcement audit provisions for fuel maps apply to engine manufacturers as specified in 40 CFR 1036.301.

(f) We may suspend or revoke certificates, based on the outcome of a selective enforcement audit, for any appropriate configurations within one or more vehicle families.

(g) We may apply selective enforcement audit provisions with respect to off-cycle technologies, with any necessary modifications, consistent with good engineering judgment.

## Subpart E—In-Use Testing

### § 1037.401 General provisions.

(a) We may perform in-use testing of any vehicle subject to the standards of this part. For example, we may test vehicles to verify drag areas or other GEM inputs as specified in paragraph (b) of this section.

(b) We may measure the drag area of a vehicle you produced after it has been placed into service. We may use any of the procedures specified in § 1037.525 for measuring drag area. Your vehicle conforms to the regulations of this part with respect to aerodynamic performance if we measure its drag area to be at or below the maximum drag area allowed for the bin to which that configuration was certified.

## Subpart F—Test and Modeling Procedures

### § 1037.501 General testing and modeling provisions.

This subpart specifies how to perform emission testing and emission modeling required elsewhere in this part.

(a) You must demonstrate that you meet emission standards using emission modeling as described in §§ 1037.515 and 1037.520. This modeling depends on several measured values as described in this subpart F. You may rely on fuel maps from the engine manufacturer as described in 40 CFR 1036.535, or you may instead use powertrain testing as described in § 1037.550.

(b) Where exhaust emission testing is required, use the equipment and procedures in 40 CFR part 1065 and/or part 1066, as applicable. Measure the emissions of all the exhaust constituents subject to emission standards as



specified in 40 CFR part 1065 and/or part 1066, as applicable. Use the applicable duty cycles specified in § 1037.510.

(c) See 40 CFR 86.101 and 86.1813 for measurement procedures that apply for evaporative and refueling emissions.

(d) Use the applicable fuels specified 40 CFR part 1065 to perform valid tests.

(1) For service accumulation, use the test fuel or any commercially available fuel that is representative of the fuel that in-use vehicles will use.

(2) For diesel-fueled vehicles, use the appropriate diesel fuel specified for emission testing. Unless we specify otherwise, the appropriate diesel test fuel is ultra low-sulfur diesel fuel.

(3) For gasoline-fueled vehicles, use the gasoline specified for "General Testing".

(e) You may use special or alternate procedures as specified in 40 CFR 1065.10.

(f) This subpart is addressed to you as a manufacturer, but it applies equally to anyone who does testing for you, and to us when we perform testing to determine if your vehicles meet emission standards.

(g) Apply this paragraph (g) whenever we specify the use of standard trailers. Unless otherwise specified, a tolerance of  $\pm 2$  inches applies for all nominal trailer dimensions.

(1) The standard trailer for high-roof tractors must meet the following criteria:

(i) It is an unloaded two-axle dry van box trailer 53.0 feet long, 102 inches wide, and 162 inches high (measured from the ground with the trailer level).

(ii) It has a king pin located with its center  $36 \pm 0.5$  inches from the front of the trailer and a minimized trailer gap (no greater than 45 inches).

(iii) It has a simple orthogonal shape with smooth surfaces and nominally flush rivets. Except as specified in paragraph (g)(1)(v) of this section, the standard trailer does not include any aerodynamic features such as side fairings, rear fairings, or gap reducers. It may have a scuff band no more than 0.13 inches thick.

(iv) It includes dual 22.5 inch wheels, standard tandem axle, standard mudflaps, and standard landing gear. The centerline of the tandem axle assembly must be  $146 \pm 4$  inches from the rear of the trailer. The landing gear must be installed in a conventional configuration.

(v) For the Phase 2 standards, include side skirts meeting the specifications of this paragraph (g)(1)(v). The side skirts must be mounted flush with the sides of the trailer and may extend as far forward as the centerline of the landing

gear and as far rearward as the leading edge of the front wheel, with a height of  $36 \pm 2$  inches. We may approve your request to use a skirt with different dimensions if these specified values are impractical or inappropriate for your test trailer, and you propose alternative dimensions that provide an equivalent or comparable degree of aerodynamic drag for your test configuration.

(2) The standard trailer for mid-roof tractors is an empty two-axle tanker trailer  $42 \pm 1$  feet long by 140 inches high.

(i) It has a  $40 \pm 1$  feet long cylindrical tank with a  $7000 \pm 7$  gallon capacity, smooth surface, and rounded ends.

(ii) The standard tanker trailer does not include any aerodynamic features such as side fairings, but does include a centered 20 inch manhole, side-centered ladder, and lengthwise walkway. It includes dual 24.5 inch wheels.

(3) The standard trailer for low-roof tractors is an unloaded two-axle flat bed trailer  $53 \pm 1$  feet long and 102 inches wide.

(i) The deck height is  $60.0 \pm 0.5$  inches in the front and  $55.0 \pm 0.5$  inches in the rear. The standard trailer does not include any aerodynamic features such as side fairings.

(ii) It includes an air suspension and dual 22.5 inch wheels on tandem axles spread up to 122 inches apart between axle centerlines, measured along the length of the trailer.

(h) Use a standard tractor for measuring aerodynamic drag of trailers. Standard tractors must be certified at Bin III or better for Phase 1 or Phase 2 under § 1037.520(b)(1) or (3). The standard tractor for long trailers is a Class 8 high-roof sleeper cab. The standard tractor for short trailers is a Class 8 high-roof day cab.

#### § 1037.510 Duty-cycle exhaust testing.

This section applies for Phase 2 powertrain testing, certain off-cycle testing under § 1037.610, and the Phase 1 advanced-technology provisions of § 1037.615.

(a) Measure emissions by testing the vehicle on a chassis dynamometer or the powertrain on a powertrain dynamometer with the applicable duty cycles. Each duty cycle consists of a series of speed commands over time—variable speeds for the transient test and constant speeds for the cruise tests. None of these cycles include vehicle starting or warmup.

(1) Perform testing for Phase 1 vehicles as follows to generate credits or adjustment factors for off-cycle or advanced technologies:

(i) *Transient cycle.* The transient cycle is specified in Appendix I of this part. Warm up the vehicle. Start the duty cycle within 30 seconds after concluding the warm-up procedure. Start sampling emissions at the start of the duty cycle.

(ii) *Cruise cycle.* For the 55 mph and 65 mph cruise cycles, warm up the vehicle at the test speed, then sample emissions for 300 seconds while maintaining vehicle speed within  $\pm 1.0$  mph of the speed setpoint; this speed tolerance applies instead of the approach specified in 40 CFR 1066.425(b)(1) and (2).

(2) If you rely on powertrain testing under § 1037.550 for demonstrating compliance with Phase 2 vehicle standards, perform testing as described in this paragraph (a)(2) to generate GEM inputs for each of the eight or nine test runs representing different vehicle configurations, and for each of the four test runs representing different idle speed settings. You may perform any number of these test runs directly in succession once the vehicle is warmed up. For these tests and other powertrain tests, perform testing as follows:

(i) *Transient cycle.* The transient cycle is specified in Appendix I of this part. Warm up the vehicle by operating over one transient cycle. Within 60 seconds after concluding the warm up cycle, start emission sampling while the vehicle operates over the duty cycle.

(ii) *Cruise cycle.* The grade portion of the route corresponding to the 55 mph and 65 mph cruise cycles is specified in Appendix IV of this part. Warm up the vehicle by operating it at the appropriate speed setpoint over the duty cycle. Within 60 seconds after concluding the warm-up cycle, start emission sampling while the vehicle operates over the duty cycle, maintaining vehicle speed within  $\pm 1.0$  mph of the speed setpoint; this speed tolerance applies instead of the approach specified in 40 CFR 1066.425(b)(1) and (2).

(iii) *Idle cycle.* Perform testing with the idle cycle for Phase 2 vocational vehicles. Warm up the vehicle by operating it at 65 mph for 600 seconds. Within 60 seconds after concluding the warm-up cycle, set the engine to operate at idle speed for 600 seconds, with the brake applied and the transmission in drive (or clutch depressed for manual transmission).

(3) For other testing of Phase 2 and later vehicles, perform testing on a chassis dynamometer as follows:

(i) *Transient cycle.* The transient cycle is specified in Appendix I of this part. Warm up the vehicle by operating over one transient cycle. Within 60 seconds

after concluding the warm up cycle, start emission sampling while the vehicle operates over the duty cycle.

(ii) *Cruise cycle*. The grade portion of the route corresponding to the 55 mph and 65 mph cruise cycles is specified in Appendix IV of this part. Warm up the

vehicle by operating it at the appropriate speed setpoint over the duty cycle. Within 60 seconds after concluding the warm-up cycle, start emission sampling while the vehicle operates over the duty cycle, maintaining vehicle speed within  $\pm 1.0$

mph of the speed setpoint; this speed tolerance applies instead of the approach specified in 40 CFR 1066.425(b)(1) and (2).

(b) Calculate the official emission result from the following equation:

$$e_{\text{CO2comp}} = \frac{1}{PL \cdot \bar{v}_{\text{moving}}} \cdot \left( (1 - w_{\text{idle}}) \cdot \left( \frac{w_{\text{transient}} \cdot m_{\text{transient}}}{D_{\text{transient}}} + \frac{w_{55} \cdot m_{55}}{D_{55}} + \frac{w_{65} \cdot m_{65}}{D_{65}} \right) \cdot \bar{v}_{\text{moving}} + w_{\text{idle}} \cdot \bar{m}_{\text{idle}} \right) \quad \text{Eq. 1037.510-1}$$

Where:

$e_{\text{CO2comp}}$  = total composite mass of CO<sub>2</sub> emissions in g/ton-mile, rounded to the nearest whole number.

$PL$  = the standard payload, in tons, as specified in § 1037.705.

$\bar{v}_{\text{moving}}$  = mean composite weighted driven vehicle speed, excluding idle operation, as shown in Table 1 of this section for Phase 2 vocational vehicles. For other vehicles, let  $\bar{v}_{\text{moving}} = 1$ .

$w_{\text{[cycle]}}$  = weighting factor for the appropriate test cycle, as shown in Table 1 of this section.

$m_{\text{[cycle]}}$  = CO<sub>2</sub> mass emissions over each test cycle (other than idle), in g/test.

$D_{\text{[cycle]}}$  = the total driving distance for the indicated drive cycle. Use 2.84 miles for the transient cycle, and use 12.5 miles for both of the cruise cycles.

$\bar{m}_{\text{idle}}$  = CO<sub>2</sub> emission rate at idle, in g/hr.

*Example:* Class 8 vocational vehicle meeting the Phase 2 standards based on the Regional duty cycle.

$PL = 7.5$  tons

$\bar{v}_{\text{moving}} = 28.1$  mph

$w_{\text{transient}} = 50\% = 0.50$

$w_{55} = 28\% = 0.28$

$w_{65} = 22\% = 0.22$

$w_{\text{idle}} = 10\% = 0.10$

$m_{\text{transient}} = 6184.7$  g

$m_{55} = 5260.0$  g

$m_{65} = 7452.5$  g

$D_{\text{transient}} = 2.84$

$D_{55} = 12.5$

$D_{65} = 12.5$

$\bar{m}_{\text{idle}} = 11707$  g/hr

$$e_{\text{CO2}} = \frac{1}{7.5 \cdot 28.1} \cdot \left( (1 - 0.10) \cdot \left( \frac{0.50 \cdot 6184.7}{2.84} + \frac{0.28 \cdot 5260.0}{12.5} + \frac{0.22 \cdot 7452.5}{12.5} \right) \cdot 28.1 + 0.10 \cdot 11707 \right) = 166.1 \text{ g/ton-mile}$$

(c) Apply weighting factors specific to each type of vehicle and for each duty cycle as follows:

(1) Apply weighting factors for tractors as shown in Table 1 of this section. Note that the weighting factors specified here are equivalent to weighting factors in GEM.

(2) Apply weighting factors for vocational vehicles as shown in Table 1 of this section. For Phase 2 vocational vehicles, select the most appropriate duty cycle for modeling emission results with each vehicle configuration. The default is the Multi-Purpose Duty Cycle. You may need to instead select the Regional Duty Cycle or the Urban Duty Cycle as follows:

(i) Except as specified in paragraph (c)(2)(iii) of this section, use the Regional Duty Cycle for each configuration meeting any of the following characteristics:

(A) The vehicle configuration as modeled in GEM reaches a speed of 65 miles per hour at less than 75% of maximum test speed for compression-ignition engines, and at less than 45% maximum test speed for spark-ignition engines, when operating in the highest available transmission gear. Maximum test speed is the highest speed from the engine's fuel map.

(B) The vehicle is intended to be used as an intercity bus.

(C) The vehicle is intended to be used for temporary housing, such as for camping.

(D) The engine was certified based on testing only with the ramped-modal cycle.

(ii) Except as specified in paragraph (c)(2)(iii) of this section, use the Urban Duty Cycle for each configuration meeting any of the following characteristics:

(A) The vehicle configuration as modeled in GEM does not reach a speed of 55 miles per hour before the engine is at or above 90% of maximum test speed for compression-ignition engines, and at or above 50% maximum test speed for spark-ignition engines, when operating in the highest available transmission gear.

(B) The vehicle has a hybrid powertrain.

(iii) You may ask us to make a different determination with respect to the duty cycle than we specify in this paragraph (c)(2) if you can demonstrate that a different duty cycle is more appropriate for a certain vehicle configuration.

(3) Use the values for weighting factors and average speed in the following table to properly simulate the appropriate duty cycle:

TABLE 1 OF § 1037.510—WEIGHTING FACTORS FOR DUTY CYCLES

	Distance-weighted			Time-weighted		Average speed while moving, (mph)
	Transient (percent)	55 mph cruise (percent)	65 mph cruise (percent)	Idle (percent)	Non-idle (percent)	
Day Cabs .....	19	17	64	.....	.....	.....
Sleeper Cabs .....	5	9	86	.....	.....	.....
Heavy-haul tractors .....	19	17	64	.....	.....	.....
Vocational—Multi-Purpose .....	82	15	3	15	85	20.9
Vocational—Regional .....	50	28	22	10	90	28.1
Vocational—Urban .....	94	6	0	20	80	19.2

TABLE 1 OF § 1037.510—WEIGHTING FACTORS FOR DUTY CYCLES—Continued

	Distance-weighted			Time-weighted		Average speed while moving, (mph)
	Transient (percent)	55 mph cruise (percent)	65 mph cruise (percent)	Idle (percent)	Non-idle (percent)	
Vocational with conventional powertrain (Phase 1 only) .....	42	21	37	.....	.....	.....
Vocational Hybrid Vehicles (Phase 1 only) .....	75	9	16	.....	.....	.....

(d) For transient testing, compare actual second-by-second vehicle speed with the speed specified in the test cycle and ensure any differences are consistent with the criteria as specified in 40 CFR 1066.425. If the speeds do not conform to these criteria, the test is not valid and must be repeated.

(e) Run test cycles as specified in 40 CFR part 1066. For cruise cycle testing of vehicles equipped with cruise control, use the vehicle's cruise control to control the vehicle speed. For vehicles equipped with adjustable vehicle speed limiters, test the vehicle

with the vehicle speed limiter at its highest setting.

(f) For Phase 1, test the vehicle using its adjusted loaded vehicle weight, unless we determine this would be unrepresentative of in-use operation as specified in 40 CFR 1065.10(c)(1).

(g) For hybrid vehicles, correct for the net energy change of the energy storage device as described in 40 CFR 1066.501.

#### § 1037.515 Determining CO<sub>2</sub> emissions to show compliance for trailers.

This section describes a compliance approach for trailers that is consistent

with the modeling for vocational vehicles and tractors described in § 1037.520, but is simplified consistent with the smaller number of trailer parameters that affect CO<sub>2</sub> emissions. Note that the calculated CO<sub>2</sub> emission rate,  $e_{CO_2}$ , is equivalent to the value that would result from running GEM with the same input values.

(a) *Compliance equation.* Calculate CO<sub>2</sub> emissions for demonstrating compliance with emission standards for each trailer configuration using the following equation:

$$e_{CO_2} = (C_1 + C_2 \cdot TRRL + C_3 \cdot \Delta C_{DA} + C_4 \cdot WR) \cdot C_5 \quad \text{Eq. 1037.515-1}$$

Where:

$C_i$  = constant values for calculating CO<sub>2</sub> emissions from this regression equation derived from GEM, as shown in Table 1 of this section. Let  $C_5 = 0.985$  for trailers

that have automatic tire inflation systems with all wheels; otherwise, let  $C_5 = 1$ .  
 $TRRL$  = tire rolling resistance level, in kg per metric ton, as specified in paragraph (b) of this section.

$\Delta C_{DA}$  = the delta  $C_{DA}$  value for the trailer, in m<sup>2</sup>, as specified in paragraph (c) of this section.

$WR$  = weight reduction, in pounds, as specified in paragraph (d) of this section.

TABLE 1 OF § 1037.515—REGRESSION COEFFICIENTS FOR CALCULATING CO<sub>2</sub> EMISSIONS

Trailer category	$C_1$	$C_2$	$C_3$	$C_4$
Long dry box van .....	77.4	1.7	−6.1	−0.001
Long refrigerated box van .....	78.3	1.8	−6.0	−0.001
Short dry box van .....	134.0	2.2	−10.5	−0.003
Short refrigerated box van .....	136.3	2.4	−10.3	−0.003

(b) *Tire rolling resistance.* Use the procedure specified in § 1037.520(c) to determine the tire rolling resistance level for your tires. Note that you may base tire rolling resistance levels on measurements performed by tire manufacturers, as long as those measurements meet this part's specifications.

(c) *Drag area.* You may use delta  $C_{DA}$  values approved under § 1037.211 for device manufacturers if your trailers are properly equipped with those devices. Determine delta  $C_{DA}$  values for other

trailers based on testing. Measure  $C_{DA}$  and determine delta  $C_{DA}$  values as described in § 1037.525(a). You may use delta  $C_{DA}$  values from one trailer configuration to represent any number of additional trailers based on worst-case testing. This means that you may apply delta  $C_{DA}$  values from your measurements to any trailer models of the same category with drag area at or below that of the tested configuration. For trailers in the "short trailer" subcategory that are not 28 feet long, apply the delta  $C_{DA}$  value established

for a comparable 28-foot trailer model; you may use the same devices designed for 28-foot trailers or you may adapt those devices as appropriate for the different trailer length, consistent with good engineering judgment. For example, 48-foot trailers may use longer side skirts than the skirts that were tested with a 28-foot trailer. Trailer and device manufacturers may seek preliminary approval for these adaptations. Determine bin levels based on delta  $C_{DA}$  test results as described in the following table:

TABLE 2 OF § 1037.515—BIN DETERMINATIONS FOR TRAILERS BASED ON AERODYNAMIC TEST RESULTS  
[delta  $C_D A$  in  $m^2$ ]

If a trailer's measured delta $C_D A$ is . . .	designated the trailer as . . .	and use the following values for delta $C_D A$
$\leq 0.09$ .....	Bin I .....	0.0
0.10–0.19 .....	Bin II .....	0.1
0.20–0.39 .....	Bin III .....	0.3
0.40–0.59 .....	Bin IV .....	0.5
0.60–0.79 .....	Bin V .....	0.7
0.80–1.19 .....	Bin VI .....	1.0
1.20–1.59 .....	Bin VII .....	1.4
$\geq 1.60$ .....	Bin VIII .....	1.8

(d) *Weight reduction.* Determine weight reduction for a trailer configuration by summing all applicable values, as follows:

(1) Determine weight reduction for using lightweight materials for wheels as described in § 1037.520(e).

(2) Apply weight reductions for other components made with light-weight materials as shown in the following table:

TABLE 3 OF § 1037.515—WEIGHT REDUCTIONS FOR TRAILERS  
[pounds]

Component	Material	Weight reduction (pounds)
Structure for Suspension Assembly <sup>1</sup> .....	Aluminum .....	280
Hub and Drum (per axle) .....	Aluminum .....	80
Floor .....	Aluminum .....	375
Floor .....	Composite (wood and plastic) .....	245
Floor Crossmembers .....	Aluminum .....	203
Landing Gear .....	Aluminum .....	50
Rear Door .....	Aluminum .....	187
Rear Door Surround .....	Aluminum .....	150
Roof Bows .....	Aluminum .....	100
Side Posts .....	Aluminum .....	300
Slider Box .....	Aluminum .....	150
Upper Coupler Assembly .....	Aluminum .....	430

<sup>1</sup> For tandem-axle suspension sub-frames made of aluminum, apply a weight reduction of 280 pounds. Use good engineering judgment to estimate a weight reduction for using aluminum sub-frames with other axle configurations.

#### § 1037.520 Modeling CO<sub>2</sub> emissions to show compliance for vocational vehicles and tractors.

This section describes how to use the Greenhouse gas Emissions Model (GEM) simulation tool (incorporated by reference in § 1037.810) to show compliance with the CO<sub>2</sub> standards of §§ 1037.105 and 1037.106 for vocational vehicles and tractors. Use GEM version 2.0.1 to demonstrate compliance with Phase 1 standards; use GEM Phase 2 version 1.0 (“GEM P2v1.0”) to demonstrate compliance with Phase 2 standards. Use good engineering judgment when demonstrating compliance using GEM. See § 1037.515 for calculation procedures for demonstrating compliance with trailer standards.

(a) *General modeling provisions.* To run GEM, enter all applicable inputs as specified by the model.

(1) GEM inputs apply for Phase 1 and Phase 2 standards as follows:

(i) Regulatory subcategory (see § 1037.230).

(ii) Coefficient of aerodynamic drag or drag area, as described in paragraph (b) of this section (tractors only).

(iii) Steer tire rolling resistance, as described in paragraph (c) of this section.

(iv) Drive tire rolling resistance, as described in paragraph (c) of this section.

(v) Vehicle speed limit, as described in paragraph (d) of this section (tractors only).

(vi) Vehicle weight reduction, as described in paragraph (e) of this section (tractors only for Phase 1).

(vii) Credit for idle-reduction strategies, as described in paragraph (f) of this section (only for Class 8 sleeper cabs and Phase 2 vocational vehicles).

(2) Additional GEM inputs apply for Phase 2 standards as follows:

(i) Transmission make, model, and type. Also identify the gear ratio for

every available forward gear to two decimal places.

(ii) Engine make, model, fuel type, engine family name, calibration identification. Also identify whether the engine is subject to spark-ignition or compression-ignition standards under 40 CFR part 1036.

(iii) Drive axle ratio,  $k_a$ . If a vehicle is designed with two or more user-selectable axle ratios, use the drive axle ratio that is expected to be engaged for the greatest driving distance. If the vehicle does not have a drive axle, such as a hybrid vehicle with direct electric drive, let  $k_a = 1$ .

(iv) Various engine and vehicle operational characteristics, as described in paragraph (f) of this section.

(v) Engine fuel map, as described in paragraph (g) of this section. Include fuel consumption at idle for vocational vehicles.

(vi) Engine full-load torque curve and motoring torque curve, as described in paragraph (h) of this section.

(vii) Loaded tire radius for drive tires, expressed to the nearest 0.01 m, as described in paragraph (c) of this section.

(viii) Vehicles with hybrid power take-off, as described in paragraph (j) of this section (vocational vehicles only).

(ix) Declared engine idle speed at CITT. This is the engine's idle speed when the vehicle is in drive.

(3) You may certify your vehicles based on powertrain testing as described in § 1037.550, rather than fuel maps, to characterize fuel consumption rates at different speed and torque values as follows:

(i) Compliance based on powertrain testing is required for hybrid electric vehicles and all vehicles with a transmission that is not automatic,

automated manual, manual, or dual-clutch. Compliance based on powertrain testing is optional for all other vehicles.

(ii) GEM inputs associated with powertrain testing include powertrain family, transmission calibration, test data from § 1037.550, and the powertrain test configuration (dynamometer connected to transmission output or wheel hub). You do not need to identify or provide inputs for transmission gear ratios, fuel map data, or engine torque curves, which would otherwise be required under paragraph (a)(2) of this section.

(iii) Fuel consumption at idle is still required for vocational vehicles.

(4) If you certify emergency vehicles to the alternative standards specified in § 1037.105(b)(4), run GEM by identifying the vehicle as an emergency vehicle and enter values for tire rolling resistance as specified in paragraph (c)

of this section. GEM requires no additional data entry for qualifying emergency vehicles.

(5) You may use a default fuel map for specialty vehicles using engines certified to alternate standards under § 1037.605.

(b) *Coefficient of aerodynamic drag and drag area.* Determine the appropriate drag area,  $C_{DA}$ , for tractors as described in this paragraph (b). Use the recommended method or an alternate method to establish a value for  $C_{DA}$ , expressed in  $m^2$  to one decimal place, as specified in § 1037.525. Where we allow you to group multiple configurations together, measure  $C_{DA}$  of the worst-case configuration.

(1) Except as specified in paragraph (b)(2) of this section, determine the Phase 1 bin level for your vehicle based on measured  $C_{DA}$  values as shown in the following tables:

TABLE 1 OF § 1037.520— $C_{DA}$  INPUTS FOR PHASE 1 HIGH-ROOF TRACTORS

Tractor type	Bin level	If your measured $C_{DA}$ ( $m^2$ ) is . . .	Then your $C_D$ input is . . .
High-Roof Day Cabs	Bin I	$\geq 8.0$	0.79
	Bin II	7.1–7.9	0.72
	Bin III	6.2–7.0	0.63
	Bin IV	5.6–6.1	0.56
	Bin V	$\leq 5.5$	0.51
High-Roof Sleeper Cabs	Bin I	$\geq 7.6$	0.75
	Bin II	6.8–7.5	0.68
	Bin III	6.3–6.7	0.60
	Bin IV	5.6–6.2	0.52
	Bin V	$\leq 5.5$	0.47

TABLE 2 OF § 1037.520— $C_{DA}$  INPUTS FOR PHASE 1 LOW-ROOF AND MID-ROOF TRACTORS

Tractor type	Bin level	If your measured $C_{DA}$ ( $m^2$ ) is . . .	Then your $C_D$ input is . . .
Low-Roof Day and Sleeper Cabs	Bin I	$\geq 5.1$	0.77
	Bin II	$\leq 5.0$	0.71
Mid-Roof Day and Sleeper Cabs	Bin I	$\geq 5.6$	0.87
	Bin II	$\leq 5.5$	0.82

(2) For Phase 1 low- and mid-roof tractors, you may instead determine your drag area bin based on the drag area bin of an equivalent high-roof tractor. If the high-roof tractor is in Bin I or Bin II, then you may assume your equivalent low- and mid-roof tractors

are in Bin I. If the high-roof tractor is in Bin III, Bin IV, or Bin V, then you may assume your equivalent low- and mid-roof tractors are in Bin II.

(3) For Phase 2 tractors other than heavy-haul tractors, determine bin levels and  $C_{DA}$  inputs as follows:

(i) Determine bin levels for high-roof tractors based on aerodynamic test results as described in the following table:

TABLE 3 OF § 1037.520—BIN DETERMINATIONS FOR PHASE 2 HIGH-ROOF TRACTORS BASED ON AERODYNAMIC TEST RESULTS  
[ $C_{DA}$  in  $m^2$ ]

Tractor type	Bin I	Bin II	Bin III	Bin IV	Bin V	Bin VI	Bin VII
Day Cabs	$\geq 7.5$	6.8–7.4	6.2–6.7	5.6–6.1	5.1–5.5	4.7–5.0	$\leq 4.6$
Sleeper Cabs	$\geq 7.3$	6.6–7.2	6.0–6.5	5.4–5.9	4.9–5.3	4.5–4.8	$\leq 4.4$

(ii) For low- and mid-roof tractors, you may determine your bin level based on aerodynamic test results as described

in Table 4 of this section, or based on the bin level of an equivalent high-roof

tractor as shown in Table 5 of this section.

TABLE 4 OF § 1037.520—BIN DETERMINATIONS FOR PHASE 2 LOW-ROOF AND MID-ROOF TRACTORS BASED ON AERODYNAMIC TEST RESULTS  
[ $C_{DA}$  in  $m^2$ ]

Tractor type	Bin I	Bin II	Bin III	Bin IV
Low-Roof Cabs .....	≥5.1	4.6–5.0	4.2–4.5	≤4.1
Mid-Roof Cabs .....	≥6.5	6.0–6.4	5.6–5.9	≤5.5

TABLE 5 OF § 1037.520—BIN DETERMINATIONS FOR PHASE 2 LOW- AND MID-ROOF TRACTORS BASED ON EQUIVALENT HIGH-ROOF TRACTORS

If your equivalent high-roof tractor is . . .	then the corresponding low- and mid-roof tractors is . . .
Bin I .....	Bin I.
Bin II .....	Bin I.
Bin III .....	Bin II.
Bin IV .....	Bin II.

TABLE 5 OF § 1037.520—BIN DETERMINATIONS FOR PHASE 2 LOW- AND MID-ROOF TRACTORS BASED ON EQUIVALENT HIGH-ROOF TRACTORS—Continued

If your equivalent high-roof tractor is . . .	then the corresponding low- and mid-roof tractors is . . .
Bin V .....	Bin III.
Bin VI .....	Bin III.
Bin VII .....	Bin IV.

(iii) Determine the  $C_{DA}$  input according to the tractor's bin level as described in the following table:

TABLE 6 OF § 1037.520—PHASE 2  $C_{DA}$  TRACTOR INPUTS BASED ON BIN LEVEL

Tractor type	Bin I	Bin II	Bin III	Bin IV	Bin V	Bin VI	Bin VII
High-Roof Day Cabs ....	7.6	7.1	6.5	5.8	5.3	4.9	4.5
High-Roof Sleeper Cabs .....	7.4	6.9	6.3	5.6	5.1	4.7	4.3
Low-Roof Cabs .....	5.3	4.8	4.3	4.0	.....	.....	.....
Mid-Roof Cabs .....	6.7	6.2	5.7	5.4	.....	.....	.....

(c) *Tire radius and rolling resistance.* You must have a loaded radius and a tire rolling resistance level (TRRL) for each tire configuration. For purposes of this section, you may consider tires with the same SKU number to be the same configuration. Determine TRRL input values separately for drive and steer tires; determine tire radius only for drive tires.

(1) Determine a tire's loaded radius as specified in ISO 28580 (incorporated by reference in § 1037.810).

(2) Measure tire rolling resistance in kg per metric ton as specified in ISO 28580 (incorporated by reference in § 1037.810), except as specified in this paragraph (c). Use good engineering judgment to ensure that your test results are not biased low. You may ask us to identify a reference test laboratory to which you may correlate your test results. Prior to beginning the test procedure in Section 7 of ISO 28580 for a new bias-ply tire, perform a break-in procedure by running the tire at the

specified test speed, load, and pressure for 60±2 minutes.

(3) For each tire design tested, measure rolling resistance of at least three different tires of that specific design and size. Perform the test at least once for each tire. Use the arithmetic mean of these results as your test result. You may use this value or any higher value as your GEM input for TRRL. You must test at least one tire size for each tire model, and may use engineering analysis to determine the rolling resistance of other tire sizes of that model. Note that for tire sizes that you do not test, we will treat your analytically derived rolling resistances the same as test results, and we may perform our own testing to verify your values. We may require you to test a small sub-sample of untested tire sizes that we select.

(4) If you obtain your test results from the tire manufacturer or another third party, you must obtain a signed statement from the party supplying those test results to verify that tests were

conducted according to the requirements of this part. Such statements are deemed to be submissions to EPA.

(5) For tires marketed as light truck tires and that have load ranges C, D, or E, use as the GEM input TRRL multiplied by 0.87.

(d) *Vehicle speed limit.* If the vehicles will be equipped with a vehicle speed limiter, input the maximum vehicle speed to which the vehicle will be limited (in miles per hour rounded to the nearest 0.1 mile per hour) as specified in § 1037.640. Otherwise leave this field blank. Use good engineering judgment to ensure the limiter is tamper resistant. We may require you to obtain preliminary approval for your designs.

(e) *Vehicle weight reduction.* Develop a weight-reduction as a GEM input as described in this paragraph (e). For purposes of this paragraph (e), high-strength steel is steel with tensile strength at or above 350 MPa.

(1) Vehicle weight reduction inputs for wheels are specified relative to dual-

wide tires with conventional steel wheels. For purposes of this paragraph (e)(1), an aluminum alloy qualifies as light-weight if a dual-wide drive wheel made from this material weighs at least

21 pounds less than a comparable conventional steel wheel. The inputs are listed in Table 7 of this section. For example, a tractor or vocational vehicle with aluminum steer wheels and eight

(4×2) dual-wide aluminum drive wheels would have an input of 210 pounds (2×21 + 8×21).

TABLE 7 OF § 1037.520—WHEEL-RELATED WEIGHT REDUCTIONS

Weight-Reduction Technology		Weight Reduction (lb per tire or wheel)
Wide-Based Single Drive Tire or Wide-Based Single Trailer Tire with . . .	Steel Wheel .....	84
	Aluminum Wheel .....	139
	Light-Weight Aluminum Alloy Wheel .....	147
Steer Tire, Dual-wide Drive Tire, or Dual-wide Trailer Tire with . . .	High-Strength Steel Wheel .....	8
	Aluminum Wheel .....	21
	Light-Weight Aluminum Alloy Wheel .....	30

(2) Weight reduction inputs for tractor components other than wheels are specified in the following table:

TABLE 8 OF § 1037.520—NONWHEEL-RELATED WEIGHT REDUCTIONS FROM ALTERNATIVE MATERIALS FOR TRACTORS  
[pounds]

Weight reduction technologies	Aluminum	High-strength steel	Thermoplastic
Door .....	20	6	.....
Roof .....	60	18	.....
Cab rear wall .....	49	16	.....
Cab floor .....	56	18	.....
Hood Support Structure System .....	15	3	.....
Hood and Front Fender .....	.....	.....	65
Day Cab Roof Fairing .....	.....	.....	18
Sleeper Cab Roof Fairing .....	75	20	40
Aerodynamic Side Extender .....	.....	.....	10
Fairing Support Structure System .....	35	6	.....
Instrument Panel Support Structure .....	5	1	.....
Brake Drums—Drive (4) .....	140	11	.....
Brake Drums—Non Drive (2) .....	60	8	.....
Frame Rails .....	440	87	.....
Crossmember—Cab .....	15	5	.....
Crossmember—Suspension .....	25	6	.....
Crossmember—Non Suspension (3) .....	15	5	.....
Fifth Wheel .....	100	25	.....
Radiator Support .....	20	6	.....
Fuel Tank Support Structure .....	40	12	.....
Steps .....	35	6	.....
Bumper .....	33	10	.....
Shackles .....	10	3	.....
Front Axle .....	60	15	.....
Suspension Brackets, Hangers .....	100	30	.....
Transmission Case .....	50	12	.....
Clutch Housing .....	40	10	.....
Fairing Support Structure System .....	35	6	.....
Drive Axle Hubs (per 4) .....	80	20	.....
Non Drive Hubs (2) .....	40	5	.....
Driveshaft .....	20	5	.....
Transmission/Clutch Shift Levers .....	20	4	.....

(3) Weight-reduction inputs for vocational-vehicle components other

than wheels are specified in the following table:

TABLE 9 OF § 1037.520—NONWHEEL-RELATED WEIGHT REDUCTIONS FROM ALTERNATIVE MATERIALS FOR PHASE 2 VOCATIONAL VEHICLES  
[pounds]

Component	Material	Vehicle type		
		Class 2b–5 vocational vehicle	Class 6–7 vocational vehicle	Class 8 vocational vehicle
Axle Hubs—Non-Drive .....	Aluminum .....	40		40
Axle Hubs—Non-Drive .....	High Strength Steel .....	5		5
Axle—Non-Drive .....	Aluminum .....	60		60
Axle—Non-Drive .....	High Strength Steel .....	15		15
Brake Drums—Non-Drive .....	Aluminum .....	60		60
Brake Drums—Non-Drive .....	High Strength Steel .....	8		8
Axle Hubs—Drive .....	Aluminum .....	40		80
Axle Hubs—Drive .....	High Strength Steel .....	10		20
Brake Drums—Drive .....	Aluminum .....	70		140
Brake Drums—Drive .....	High Strength Steel .....	5.5		11
Clutch Housing .....	Aluminum .....	34		40
Clutch Housing .....	High Strength Steel .....	9		10
Suspension Brackets, Hangers .....	Aluminum .....	67		100
Suspension Brackets, Hangers .....	High Strength Steel .....	20		30
Transmission Case .....	Aluminum .....	45		50
Transmission Case .....	High Strength Steel .....	11		12
Crossmember—Cab .....	Aluminum .....	10	14	15
Crossmember—Cab .....	High Strength Steel .....	2	4	5
Crossmember—Non-Suspension .....	Aluminum .....	15	18	21
Crossmember—Non-Suspension .....	High Strength Steel .....	5	6	7
Crossmember—Suspension .....	Aluminum .....	15	20	25
Crossmember—Suspension .....	High Strength Steel .....	4	5	6
Driveshaft .....	Aluminum .....	12	40	50
Driveshaft .....	High Strength Steel .....	5	10	12
Frame Rails .....	Aluminum .....	120	300	440
Frame Rails .....	High Strength Steel .....	24	40	87

(4) Apply vehicle weight inputs for changing technology configurations as follows:

(i) For Class 8 tractors or Class 8 vocational vehicles with a permanent 6×2 axle configuration, apply a weight reduction input of 300 pounds.

(ii) For Class 8 tractors with 4×2 axle configuration, apply a weight reduction input of 400 pounds.

(iii) For tractors with installed engines with displacement below 14.0 liters, apply a weight reduction of 300 pounds.

(iv) GEM accounts for increased vehicle weight for vehicles that use natural gas. For vehicles that use a fuel other than diesel fuel, gasoline, or natural gas, use good engineering judgment to determine an appropriate weight adjustment relative to a comparable vehicle fueled by gasoline or diesel fuel. This may require a negative value.

(5) You may ask to apply the off-cycle technology provisions of § 1037.610 for weight reductions not covered by this paragraph (e).

(f) *Additional vehicle characteristics.* GEM accounts for CO<sub>2</sub> emission reductions for certain technologies and vehicle configurations as noted in this paragraph (f) for Phase 2 vehicles. Because these adjustments are made

internal to GEM, you need to identify the features as GEM inputs rather than separately applying these adjustments to GEM results. These adjustments (as applicable for GEM 3.0) are summarized for informational purposes only.

(1) GEM applies a 2.5% emission reduction for single drive axles with the following Class 8 vehicles:

(i) Tractors in a 4×2 configuration.

(ii) Vocational vehicles and tractors with a permanent 6×2 configuration. The same emission reduction applies for part-time 6×2 configurations, but only for the cruise cycles specified in § 1037.510.

(2) GEM applies a 0.5% emission reduction for vehicles that use a low-friction drive axle lubricant, as follows:

(i) A lubricant qualifies if it meets the specifications for BASF Emgard FE 2986 as described in “Emgard® FE 75W–90 Fuel Efficient Synthetic Gear Lubricant” (incorporated by reference in § 1037.810).

(ii) You may use A to B testing using the procedures in § 1037.560 to show that a lubricant performs at an equivalent or superior level relative to a lubricant specified in paragraph (f)(2)(i) of this section. Testing must show equivalent or superior performance at every specified speed and torque value.

(3) GEM applies a 2% emission reduction for tractors if they have an automatic transmission, an automated manual transmission, or a dual-clutch transmission. Similarly, GEM applies a 2.3% emission reduction for Class 8 vocational vehicles certified with the Regional duty cycle if they have an automated manual transmission or a dual-clutch transmission.

(4) GEM applies a 2% emission reduction for tractors with predictive cruise control. This includes any cruise control system that incorporates satellite-based global-positioning data for controlling operator demand.

(5) GEM applies a 0.5% emission reduction for tractors with a high-efficiency air conditioning compressor. This includes mechanically powered compressors meeting the specifications described in 40 CFR 86.1868–12(h)(5), and all electrically powered compressors.

(6) GEM applies a 1% emission reduction for tractors with electrically powered pumps for steering and engine cooling.

(7) GEM applies a 1% emission reduction for tractors with automatic tire inflation systems.



(8) GEM accounts for emission reductions for reduced idle for the following technologies:

(i) *Stop-start technology for vocational vehicles.* Phase 2 vocational vehicles qualify for reduced emissions in GEM modeling if the engine shuts down no more than 30 seconds after the onset of any of the following conditions:

(A) The vehicle's brake is depressed at a zero-speed condition.

(B) A vehicle with automatic transmission goes into "Park".

(ii) *Neutral-idle technology for vocational vehicles.* A Phase 2 vocational vehicle with an automatic transmission qualifies for reduced emissions in GEM modeling if the vehicle goes into neutral (or reduces torque equivalent to being in neutral) at a zero-speed condition.

(iii) *Extended-idle reduction.* If your sleeper cab is equipped with idle reduction technology meeting the requirements of § 1037.660 that will automatically shut off the main engine after 300 seconds or less, GEM applies a 5 percent emission reduction for Phase 2 vehicles. For Phase 1, enter 5.0 g/ton-mile as the input (or a lesser value specified in § 1037.660); otherwise leave this field blank.

(g) *Engine fuel mapping and fuel consumption at idle.* Use the fuel map and fuel consumption at idle from the engine manufacturer to characterize the engine's specific fuel consumption, or create a new fuel map and determine fuel consumption at idle as described in 40 CFR 1036.535.

(h) *Engine full-load torque curve and motoring torque curve.* Use the full-load torque curve and the motoring torque map from the engine manufacturer or create new maps as described in 40 CFR 1065.510(b) and (c)(2).

(i) *Vehicles with hybrid power take-off.* Determine the delta PTO emission result of your engine and hybrid power take-off system as described in § 1037.540.

(j) *Alternate fuels.* For fuels other than those identified in GEM, perform the simulation by identifying the vehicle as being diesel-fueled, but use a fuel map based on the mass flow rates of the alternate fuel.

#### § 1037.525 Aerodynamic measurements.

This section describes a methodology for determining aerodynamic drag area,  $C_{DA}$  for use in determining input values for §§ 1037.515 and 1037.520.

(a) *General provisions for trailers.* A trailer's aerodynamic performance for demonstrating compliance with standards is based on a delta  $C_{DA}$  value relative to a baseline trailer. Determine these delta  $C_{DA}$  values by performing A to B testing, as follows:

(1) The default method for measuring  $C_{DA}$  is a coastdown procedure as specified in § 1037.527. If we approve it in advance, you may instead use one of the alternative methods specified in §§ 1037.529 through 1037.533, consistent with good engineering judgment. If you request our approval to determine drag area using an alternative method, you must submit additional information as described in paragraph (c) of this section.

(2) Determine a baseline  $C_{DA}$  value for a standard tractor pulling a test trailer representing a production configuration; use a 53-foot test trailer to represent long trailers and a 28-foot test trailer to represent short trailers. Repeat this testing with the same tractor and a baseline trailer. For testing long trailers, the baseline trailer is a trailer meeting the specifications for a Phase 1 standard trailer in § 1037.501(g)(1); for testing refrigerated box vans, install an HVAC unit on the baseline trailer that properly represents a baseline configuration. For testing short trailers, use a 28-foot baseline trailer with a single axle that meets the same specifications as the Phase 1 standard trailer, except as needed to accommodate the reduced trailer length. Use good engineering judgment to perform paired tests that

accurately demonstrate the reduction in aerodynamic drag associated with the improved design. Measure  $C_{DA}$  in  $m^2$  to two decimal places. Calculate delta  $C_{DA}$  by subtracting the drag area for the test trailer from the drag area for the baseline trailer.

(b) *General provisions for tractors.* The GEM input for a tractor's aerodynamic performance is an absolute  $C_{DA}$  value that is measured or calculated for a tractor in a test configuration. Test high-roof tractors with a standard box trailer. Note that the standard box trailer for Phase 1 tractors is different from that of later model years. Test low-roof and mid-roof tractors without a trailer; however, you may test low-roof and mid-roof tractors with a trailer to evaluate off-cycle technologies. The default method for determining  $C_{DA}$  values is a coastdown procedure as specified in § 1037.527. If we approve it in advance, you may instead use one of the alternative methods specified in §§ 1037.529 through 1037.533, or some other method, based on a correlation to coastdown testing, consistent with good engineering judgment. Submit information describing how you determined  $C_{DA}$  values from coastdown testing whether or not you use an alternative method. If you request our approval to determine drag area using an alternative method,  $C_{DA_{alt}}$ , you must submit additional information as described in paragraph (c) of this section and adjust the  $C_{DA}$  values to be equivalent to the corresponding values from coastdown measurements as follows:

(1) Unless good engineering judgment requires otherwise, assume that coastdown drag areas are proportional to drag areas measured using alternative methods. This means you may apply a single constant adjustment factor,  $F_{alt-aero}$ , for a given alternate drag area method using the following equation:

$$C_{DA} = C_{DA_{alt}} \cdot F_{alt-aero} \quad \text{Eq. 1037.525-1}$$

(2) Determine  $F_{alt-aero}$  by performing coastdown testing and applying your alternate method on the same vehicle. Unless we approve another vehicle, the vehicle must be a Class 8, high-roof, sleeper cab with a full aerodynamics package, pulling a standard trailer. Where you have more than one tractor model meeting these criteria, use the tractor model with the highest projected sales. If you do not have such a tractor

model, you may use your most comparable tractor model with our prior approval. In the case of alternate methods other than those specified in this subpart, good engineering judgment may require you to determine your adjustment factor based on results from more than one vehicle.

(3) For Phase 2 testing, determine separate values of  $F_{alt-aero}$  for a high-roof day cab and a high-roof sleeper cab

corresponding to each major tractor model based on testing as described in paragraph (b)(2) of this section. Perform this testing on each major tractor model. You may ask us to approve aggregating separate product lines into a single major tractor model if you show that the product lines are different only in ways that are unrelated to aerodynamic characteristics. If you have more than six major tractor models, you may limit

your testing in a given year to a maximum of six major tractor models until you have performed testing for your whole product line. For any untested tractor models, apply the value of  $F_{\text{alt-aero}}$  from the tested tractor model that best represents the aerodynamic characteristics of the untested tractor model, consistent with good engineering judgment. Testing under this paragraph (b)(3) continues to be valid for later model years until you change the tractor model in a way that causes the test results to no longer represent production vehicles. You must also determine unique values of  $F_{\text{alt-aero}}$  for low-roof and mid-roof tractors if you determine  $C_{\text{D}}A$  values based on low or mid-roof tractor testing as shown in Table 4 of § 1037.520. For Phase 1 testing, if good engineering judgment allows it, you may calculate a single, constant value of  $F_{\text{alt-aero}}$  for your whole product line by dividing the coastdown drag area,  $C_{\text{D}}A_{\text{coast}}$ , by  $C_{\text{D}}A_{\text{alt}}$ .

(4) Calculate  $F_{\text{alt-aero}}$  to at least three decimal places. For example, if your coastdown testing results in a drag area of 6.430, but your wind tunnel method results in a drag area of 6.200,  $F_{\text{alt-aero}}$  would be 1.037.

(c) *Approval of alternative methods.* You must obtain preliminary approval before using any method other than coastdown testing to determine drag coefficients. We will approve your request if you show that your

procedures produce data that are the same as or better than coastdown testing with respect to repeatability and unbiased correlation. Note that the correlation is not considered to be biased if there a bias before correction, but you remove the bias using  $F_{\text{alt-aero}}$ . Send your request for approval to the Designated Compliance Officer. Keep records of the information specified in this paragraph (c). Unless we specify otherwise, include this information with your request. You must provide any information we require to evaluate whether you may apply the provisions of this section, consistent with good engineering judgment. Include additional information related to your alternative method as described in §§ 1037.529 through 1037.533. If you use a method other than those specified in this subpart, include all the following information, as applicable:

- (1) Official name/title of the procedure.
- (2) Description of the procedure.
- (3) Cited sources for any standardized procedures that the method is based on.
- (4) Description and rationale for any modifications/deviations from the standardized procedures.
- (5) Data comparing the procedure to the coastdown reference procedure.
- (6) Additional information specified for the alternative methods described in §§ 1037.529 through 1037.533 as

applicable to this method (*e.g.*, source location/address, background/history).

(d) *Yaw sweep corrections.*

Aerodynamic features can be more effective at reducing wind-averaged drag than is predicted by zero-yaw drag. The following procedures describe how to adjust a tractor's  $C_{\text{D}}A$  values to account for wind-averaged drag:

(1) For Phase 2 testing, apply the following method based on SAE J1252 (incorporated by reference in § 1037.810):

(i) Determine the zero-yaw drag area,  $C_{\text{D}}A_{\text{zero-yaw}}$ , and the yaw-sweep drag area for your vehicle using the same alternate method. For the yaw sweep drag area, measure the drag area, at a minimum, at yaw angles of  $0^\circ$ ,  $\pm 1^\circ$ ,  $\pm 3^\circ$ ,  $\pm 6^\circ$ , and  $\pm 9^\circ$ , where  $0^\circ$  represents the direction of travel. Alternatively, using good engineering judgment with demonstration of equivalency and our prior approval, you may measure the drag area using different or fewer yaw angles than those specified above, provided they satisfy the requirements for SAE J1252, unless otherwise demonstrated.

(ii) Calculate the wind-averaged coefficient of drag according to SAE J1252 based on a vehicle speed of 55 mph and a wind speed of 7 mph.

(iii) For the tractor used to determine  $F_{\text{alt-aero}}$ , determine your wind-averaged drag area,  $C_{\text{D}}A_{\text{wa}}$ , using the following equation:

$$C_{\text{D}}A_{\text{wa}} = C_{\text{D}}A_{\text{zero-coastdown}} + (C_{\text{D}}A_{\text{wa-alt}} - C_{\text{D}}A_{\text{zero-alt}}) \cdot F_{\text{alt-aero}} \quad \text{Eq. 1037.525-2}$$

(iv) For additional tractors using an alternative method and predetermined

$F_{\text{alt-aero}}$ , use the following equation to determine  $C_{\text{D}}A_{\text{wa}}$ :

$$C_{\text{D}}A_{\text{wa}} = C_{\text{D}}A_{\text{wa-alt}} \cdot F_{\text{alt-aero}} \quad \text{Eq. 1037.525-3}$$

(v) You may calculate  $C_{\text{D}}A_{\text{wa}}$  without additional testing by adding  $0.80 \text{ m}^2$  to  $C_{\text{D}}A_{\text{zero-coastdown}}$  or using the following

equation if you use an alternative method:

$$C_{\text{D}}A_{\text{wa}} = (C_{\text{D}}A_{\text{zero-alt}} \cdot F_{\text{alt-aero}}) + 0.80 \quad \text{Eq. 1037.525-4}$$

(2) For Phase 1 testing, you may correct your zero-yaw drag area as follows if the ratio of the zero-yaw drag

area divided by yaw-sweep drag area for your vehicle is greater than 0.8065 for  $\pm 6^\circ$  yaw angle or 0.8330 for wind-

averaged drag (which represents the ratios expected for a typical Class 8 high-roof sleeper cab):

(i) Determine the zero-yaw drag area,  $C_{DA_{zero-yaw}}$ , and the yaw-sweep drag area,  $C_{DA_{full-ys}}$ , for your vehicle using the same alternate method as specified in this subpart. Measure the drag area for  $0^\circ$ ,  $-6^\circ$ , and  $+6^\circ$ . Use the arithmetic mean of the  $-6^\circ$  and  $+6^\circ$  drag areas as the  $\pm 6^\circ$  drag area,  $\overline{C_{DA_{\pm 6}}}$ .

(ii) Calculate your yaw-sweep correction factor,  $CF_{ys}$ , using the following equation:

$$CF_{ys} = \frac{\overline{C_{DA_{\pm 6}}} \cdot 0.8065}{C_{DA_{zero-yaw}}} \quad \text{Eq. 1037.525-5}$$

(iii) You may instead calculate the wind-averaged drag area according to SAE J1252 (incorporated by reference in § 1037.810) and substitute this value

into Equation 1037.525-4 for the  $\pm 6^\circ$  yaw-averaged drag area. If you choose to calculate the wind-averaged drag area according to SAE J1252, you may

calculate your yaw-sweep correction factor,  $CF_{ys}$ , using Equation 1037.525-5 through model year 2017; otherwise use the following equation:

$$CF_{ys} = \frac{C_{DA_{full-ys}} \cdot 0.8330}{C_{DA_{zero-yaw}}} \quad \text{Eq. 1037.525-6}$$

(iv) Calculate your corrected drag area for determining the aerodynamic bin by multiplying the measured zero-yaw drag area by  $CF_{ys}$  as determined using Equation 1037.525-5 or 1037.525-6, as

applicable. You may apply the correction factor to drag areas measured using other procedures. For example, apply  $CF_{ys}$  to drag areas measured using the coastdown method. If you use an

alternative method, apply an alternative correction,  $F_{alt-aero}$ , and calculate the final drag area using the following equation:

$$C_{DA} = F_{alt-aero} \cdot CF_{ys} \cdot C_{DA_{zero-alt}} \quad \text{Eq. 1037.525-7}$$

(v) You may ask us to apply  $CF_{ys}$  to similar vehicles incorporating the same design features.

#### § 1037.527 Coastdown procedures for calculating drag area ( $C_{DA}$ ).

The coastdown procedures in this section describe how to calculate drag area,  $C_{DA}$ , for Phase 2 tractors and trailers, subject to the provisions of § 1037.525. Follow the provisions of Sections 1 through 9 of SAE J2263 (incorporated by reference in § 1037.810), with the following clarifications and exceptions:

(a) The terms and variables identified in this section have the meaning given in SAE J1263 (incorporated by reference in § 1037.810) and J2263 unless specified otherwise.

(b) To determine  $C_{DA}$  values for a tractor, perform coastdown testing with a tractor-trailer combination using the manufacturer's tractor and a standard trailer. To determine  $C_{DA}$  values for a trailer, perform coastdown testing with a tractor-trailer combination using a

standard tractor. Prepare tractors and trailers for testing as follows:

(1) Install instrumentation for performing the specified measurements.

(2) After adding vehicle instrumentation, verify that there is no brake drag or other condition that prevents the wheels from rotating freely. Do not apply the parking brake at any point between this inspection and the end of the measurement procedure.

(3) Install tires mounted on steel rims in a dual configuration (except for steer tires). The tires must—

(i) Be SmartWay-Verified or have a coefficient of rolling resistance at or below 5.1 kg/metric ton.

(ii) Have accumulated at least 2,175 miles but have no less than 50 percent of their original tread depth, as specified for truck cabs in SAE J1263 (incorporated by reference in § 1037.810).

(iii) Not be retreads or have any apparent signs of chunking or uneven wear.

(iv) Be size 295/75R22.5 or 275/80R22.5.

(v) Be inflated to the proper tire pressure as specified in Sections 6.6 and 8.1 of SAE J2263.

(4) Perform an inspection or wheel alignment for both the tractor and the trailer to ensure that wheel position is within the manufacturer's specifications.

(c) The test condition specifications described in Sections 7.1 through 7.4 of SAE J1263 apply, with the following exceptions and additional provisions:

(1) We recommend that you not perform coastdown testing if winds are expected to exceed 6.0 mph.

(2) Road grade may exceed 0.5%; however, the road grade for testing must not be excessive, considering factors such as coastdown effects and road safety standards.

(3) If road grade is greater than 0.02% over the length of the test surface, you must determine road grade as a function of distance along the length of the test surface and incorporate this into the

analysis. Use Section 11.5 of SAE J2263 to calculate the force due to grade.

(4) The road surface temperature must be at or below 50 °C. Use good engineering judgment to measure road surface temperature.

(d)  $C_D A$  calculations are based on measured speed values while the vehicles coasts down through a high-speed range from 70 down to 60 mph, and through a low-speed range from 25 down to 15 mph. Disable any vehicle speed limiters that prevent travel above 72 mph. If a vehicle cannot exceed 72 mph, adjust the high-speed range to include the highest achievable speed range as described in paragraph (g)(2) of this section. Measure vehicle speed at a minimum recording frequency of 10 Hz, in conjunction with time-of-day data. Determine vehicle speed using either of the following methods:

(1) *Complete coastdown runs.* Operate the vehicle at a top speed above 72 mph and allow the vehicle to coast down to 13 mph or lower. Collect data for the high-speed range over a test segment that includes speeds from 72 down to 58 mph, and collect data for the low-speed range over a test segment that includes speeds from 27 down to 13 mph. Perform a minimum of sixteen valid coastdown runs, eight in each direction.

(2) *Split coastdown runs.* Collect data during a high-speed coastdown while the vehicle coasts through a test segment that includes speeds from 72 mph down to 58 mph. Similarly, collect data during a low-speed coastdown

while the vehicle coasts through a test segment that includes speeds from 27 mph down to 13 mph. Perform two to four high-speed coastdowns consecutively in one direction followed by the same number of low-speed coastdowns in the same direction, then perform that same number of measurements in the opposite direction. Repeat this process until you have performed twelve valid high-speed coastdowns and twelve valid low-speed coastdowns in each direction. You may not split runs as described in Section 9.3.1 of SAE J2263 except as allowed under this paragraph (d)(2).

(e) Measure wind speed, wind direction, air temperature, and air pressure at a minimum recording frequency of 1 Hz, in conjunction with time-of-day data. Use at least one stationary electro-mechanical anemometer and suitable data loggers meeting SAE J1263 specifications, subject to the following additional specifications for the anemometer placed along the test surface:

(1) You must start a coastdown measurement within 24 hours after running zero-wind and zero-angle calibrations.

(2) Place the anemometer at least 50 feet from the nearest tree and at least 25 feet from the nearest bush (or equivalent features). Position the anemometer adjacent to the test surface, near the midpoint of the length of the track, between 2.5 and 3.0 body widths from the expected location of the test

vehicle's centerline as it passes the anemometer. Record the location of the anemometer along the test track, to the nearest 10 feet.

(3) Mount the anemometer at a height that is within 6 inches of half the test vehicle's body height.

(4) The height of vegetation surrounding the anemometer may not exceed 10% of the anemometer's mounted height, within a radius equal to the anemometer's mounted height.

(f) Measure air speed and air direction onboard the vehicle at a minimum recording frequency of 10 Hz, in conjunction with time-of-day data, using an anemometer and suitable data loggers that meet the requirements of Sections 5.4 and 5.5 of SAE J2263. Mount the anemometer 1 meter above the top of the leading edge of the trailer. Correct anemometer measurements using the wind speed and wind direction measurements described in paragraph (e) of this section as follows:

(1) Calculate arithmetic mean values for vehicle speed, air speed, wind speed, and wind direction in 5-mph vehicle speed increments for each coastdown. Include data from vehicle speeds between 60 and 25 mph if you collect data from complete coastdown runs. You may disregard data from an increment at the start or end of the coastdown run if it is less than 5 minutes.

(2) Calculate the theoretical air speed,  $v_{air,th}$ , for each 5-mph increment using the following equation:

$$\bar{v}_{air,th} = \sqrt{\bar{w}^2 + \bar{v}^2 - \bar{v} \bar{w} \cos(\bar{\theta}_w + \theta_{veh})} \quad \text{Eq. 1037.527-1}$$

Where:

$\bar{w}$  = the mean wind speed over each 5-mph increment.

$\bar{v}$  = the mean vehicle speed over each 5-mph increment.

$\bar{\theta}_w$  = the mean wind direction over each 5-mph increment. Let  $\bar{\theta}_w = 0$  for air flow in the first travel direction, with values

increasing counterclockwise. For example, if the vehicle starts by traveling eastbound, then  $\bar{\theta}_w = 270^\circ$  means a wind from the south.

$\bar{\theta}_{veh}$  = the vehicle direction. Use  $\bar{\theta}_{veh} = 0^\circ$  for travel in the first direction, and use  $\bar{\theta}_{veh} = 180^\circ$  for travel in the opposite direction.

(3) Perform a linear regression using paired values of  $\bar{v}_{air,th}$  and measured air speed,  $\bar{v}_{air,meas}$ , from all 5-mph increments to determine the air-speed correction coefficients,  $\alpha_0$  and  $\alpha_1$ , based on the following equation:

$$\bar{v}_{air,th} = \alpha_0 + \alpha_1 \cdot \bar{v}_{air,meas} \quad \text{Eq. 1037.527-2}$$

(4) Correct each measured value of air speed using the following equation:

$$v_{air} = \alpha_0 + \alpha_1 \cdot v_{air,meas} \quad \text{Eq. 1037.527-3}$$

(g) Determine drag area,  $C_D A$ , using the following procedure instead of what is specified in Section 10 of SAE J1263:

(1) Calculate the vehicle's effective mass,  $M_e$ , to account for rotational inertia by adding 56.7 kg to the measured vehicle mass,  $M$ , (in kg) for each tire making road contact.

(2) Operate the vehicle and collect data over the high-speed range and low-speed range as specified in paragraph (d)(1) or (d)(2) of this section. If a vehicle cannot exceed a maximum speed of 72 mph, establish an alternate high-speed range by fixing the high end of the high-speed range at 2 mph less than the vehicle's maximum speed, and fixing the low end of the high-speed

range such that the high-speed range spans 10 mph; adjust the testing and calculation instructions in this paragraph (g) as needed to account for this alternate high-speed range.

(3) Calculate mean vehicle speed at each speed endpoint (70, 60, 25, and 15 mph) as follows:

(i) Calculate the mean vehicle speed (in m/s) to represent the starting point of each speed range as the arithmetic average of measured speeds throughout the speed interval defined as 2.00 mph above the nominal starting speed point to 2.00 mph below the nominal starting speed point, expressed to at least two decimal places. Determine the timestamp corresponding to the starting

point of each speed range as the time midpoint of the  $\pm 2.00$  mph speed interval.

(ii) Repeat the calculations described in paragraph (g)(3)(i) of this section corresponding to the endpoint speed (60 or 15 mph) to determine the time at which the vehicle reaches the ending speed, and the mean vehicle speed representing the endpoint of each speed range.

(iii) If you incorporate grade into your calculations, use the average values for the elevation and distance traveled over each interval.

(4) Calculate the road-load force,  $F$ , for each speed range using the following equation:

$$F = -M_e \cdot \frac{\bar{v}_{\text{start}} - \bar{v}_{\text{end}}}{\bar{t}_{\text{start}} - \bar{t}_{\text{end}}} + M \cdot a_g \cdot \frac{\bar{h}_{\text{start}} - \bar{h}_{\text{end}}}{D_{\text{start}} - D_{\text{end}}} - F_{\text{axle}} \quad \text{Eq. 1037.527-4}$$

Where:

$M_e$  = the vehicle's effective mass, in kg, expressed to at least one decimal place.  
 $\bar{v}$  = average vehicle speed, in m/s, at the start or end of each speed range, as described in paragraph (g)(3) of this section.  
 $\bar{t}$  = timestamp at which the vehicle reaches the starting or ending speed, in seconds, expressed to at least one decimal place.

$M$  = the vehicle's measured mass, in kg, expressed to at least one decimal place.  
 $\bar{h}$  = average elevation at the start or end of each speed range, in m, expressed to at least two decimal places.  
 $\bar{D}$  = distance traveled on the road surface from a fixed reference location along the road to the start or end of each speed range, in m, expressed to at least one decimal place.

$F_{\text{axle}}$  = an estimate of rear-axle losses. Use 200 N for the high-speed range and 100 N for the low-speed range.

$a_g$  = acceleration of Earth's gravity, as described in 40 CFR 1065.630.

(5) If you perform high-speed and low-speed coastdowns as described in paragraph (d)(2) of this section, average the  $F$  values for each set of consecutive low-speed runs. Use this value as  $F_{\text{lo}}$  in the calculations in this paragraph (g) to apply to each of the high-speed runs in a set of consecutive high-speed runs that immediately precede a set of consecutive low-speed runs. Otherwise, determine the  $F_{\text{lo}}$  and  $F_{\text{hi}}$  values in the calculations in this paragraph (g) from the same run.

(6) Calculate average air temperature  $\bar{T}$  and air pressure  $\bar{p}_{\text{act}}$  during each high-speed run.

(7) Calculate average air speed during each speed range for each run,  $\bar{v}_{\text{air,hi}}$  and  $\bar{v}_{\text{air,lo}}$ .

(8) Perform an iterative calculation to determine aerodynamic and mechanical forces as follows:

(i) Assume initially that aerodynamic forces for the low-speed range are zero:  $F_{\text{aero,lo}} = 0$ .

(ii) Estimate high-speed aerodynamic forces by subtracting mechanical forces from the road-load force corresponding to the high-speed coastdown,  $F_{\text{hi}}$ , as follows:

$$F_{\text{aero,hi}} = F_{\text{hi}} - (F_{\text{lo}} - F_{\text{aero,lo}}) \quad \text{Eq. 1037.523-5}$$

(iii) Calculate a new value for  $F_{\text{aero,lo}}$  by adjusting the high-speed

aerodynamic forces to account for speed, as follows:

$$F_{\text{aero,lo}} = F_{\text{aero,hi}} \cdot \frac{\bar{v}_{\text{air,lo}}^2}{\bar{v}_{\text{air,hi}}^2} \quad \text{Eq. 1037.527-6}$$

(iv) Repeat the steps in paragraphs (g)(8)(ii) and (iii) of this section until  $F_{\text{aero,hi}}$  changes less than 1.0%.

(9) Calculate drag area,  $C_D A$ , in  $\text{m}^2$  for each high-speed segment using the following equation:

$$C_D A = \frac{2 \cdot F_{\text{aero,hi}}}{\bar{v}_{\text{air,hi}}^2} \cdot \frac{R \cdot \bar{T}}{\bar{p}_{\text{act}}} \quad \text{Eq. 1037.527-7}$$

Where:

$R$  = specific gas constant = 287.058 J/(kg·K).

$\bar{T}$  = mean air temperature in K, expressed to at least one decimal place.

$\bar{P}_{\text{act}}$  = mean absolute air pressure in Pa, expressed to at least one decimal place.

(10) Calculate an arithmetic mean  $C_{DA}$  value from all the high-speed segments to determine the drag area for the test.

(h) Include the following information in your application for certification:

(1) The name, location, and description of your test facilities, including background/history, equipment and capability, and track and

facility elevation, along with the grade and size/length of the track.

(2) Test conditions for each test result, including date and time, wind speed and direction, ambient temperature and humidity, vehicle speed, driving distance, manufacturer name, test vehicle/model type, model year, applicable family, tire type and rolling resistance, weight of tractor-trailer (as tested), and driver identifier(s).

(3) Average  $C_{DA}$  result and all the individual run results (including voided or invalid runs).

#### **§ 1037.529 Wind-tunnel procedures for calculating drag area ( $C_{DA}$ ).**

(a) You may measure drag areas consistent with published SAE procedures as described in this section using any wind tunnel recognized by the Subsonic Aerodynamic Testing Association, subject to the provisions of § 1037.525. If your wind tunnel does not meet the specifications described in this section, you may ask us to approve it as an alternative method under § 1037.525(b). All wind tunnels must meet the specifications described in SAE J1252 (incorporated by reference in § 1037.810), with the following exceptions and additional provisions:

(1) The minimum Reynold's number,  $Re_{\text{min}}^{\#}$ , is  $1.0 \cdot 10^6$  instead of the value specified in

section 5.2 of SAE J1252. Also, the projected frontal area of the vehicle at zero yaw angle

may exceed the recommended 5 percent of the active test section area, but it may not exceed 25 percent.

(2) For full-scale wind tunnel testing, use good engineering judgment to select a tractor and trailer that is a reasonable representation of the tractor and trailer used for eference coastdown testing. For example, where your wind tunnel is not long enough to test the tractor with a standard 53 foot trailer, it may be appropriate to use a shorter box trailer. In such a case, the correlation developed using the shorter trailer would only be valid for testing with the shorter trailer.

(3) For reduced-scale wind tunnel testing, use a one-eighth or larger scale model of a tractor and trailer that is sufficient to simulate airflow through the radiator inlet grill and across an engine geometry that represents engines commonly used in your test vehicle.

(b) Open-throat wind tunnels must also meet the specifications of SAE J2071 (incorporated by reference in § 1037.810).

(c) To determine  $C_{DA}$  values for a tractor, perform wind-tunnel testing with a tractor-trailer combination using the manufacturer's tractor and a standard trailer. To determine  $C_{DA}$  values for a trailer, perform wind-tunnel testing with a tractor-trailer combination using a standard tractor. The wind tunnel tests performed under this section must simulate a vehicle speed of 55 mph. For Phase 1 vehicles, conduct the wind tunnel tests at a zero yaw angle and, if so equipped, utilizing the moving/rolling floor to simulate driving

the vehicle for comparison to the coastdown procedure, which corrects to a zero yaw angle for the oncoming wind. For Phase 2 vehicles, conduct the wind tunnel tests by measuring the drag area according to § 1037.525(d)(1) and, if so equipped, utilizing the moving/rolling floor for comparison to the coastdown procedure.

(d) In your request to use wind-tunnel testing, describe how you meet all the specifications that apply under this section, using terminology consistent with SAE J1594 (incorporated by reference in § 1037.810). If you request our approval to use wind-tunnel testing even though you do not meet all the specifications of this section, describe how your method nevertheless qualifies as an alternative method under § 1037.525(c) and include all the following information:

(1) Identify the name and location of the test facilities for your wind tunnel method.

(2) Background and history of the wind tunnel.

(3) The wind tunnel's layout (with diagram), type, and construction (structural and material).

(4) The wind tunnel's design details: The type and material for corner turning vanes, air settling specification, mesh screen specification, air straightening method, tunnel volume, surface area, average duct area, and circuit length.

(5) Specifications related to the wind tunnel's flow quality: Temperature

control and uniformity, airflow quality, minimum airflow velocity, flow uniformity, angularity and stability, static pressure variation, turbulence intensity, airflow acceleration and deceleration times, test duration flow quality, and overall airflow quality achievement.

(6) Test/working section information: Test section type (e.g., open, closed, adaptive wall) and shape (e.g., circular, square, oval), length, contraction ratio, maximum air velocity, maximum dynamic pressure, nozzle width and height, plenum dimensions and net volume, maximum allowed model scale, maximum model height above road, strut movement rate (if applicable), model support, primary boundary layer slot, boundary layer elimination method, and photos and diagrams of the test section.

(7) Fan section description: Fan type, diameter, power, maximum rotational speed, maximum speed, support type, mechanical drive, and sectional total weight.

(8) Data acquisition and control (where applicable): Acquisition type, motor control, tunnel control, model balance, model pressure measurement, wheel drag balances, wing/body panel balances, and model exhaust simulation.

(9) Moving ground plane or rolling road (if applicable): Construction and material, yaw table and range, moving ground length and width, belt type,

maximum belt speed, belt suction mechanism, platen instrumentation, temperature control, and steering.

(10) Facility correction factors and purpose.

**§ 1037.531 Using computational fluid dynamics to calculate drag area ( $C_D A$ ).**

This section describes how to use commercially available computational fluid dynamics (CFD) software to determine  $C_D A$  values, subject to the provisions of § 1037.525.

(a) To determine  $C_D A$  values for a tractor, perform CFD modeling based on a tractor-trailer combination using the manufacturer's tractor and a standard trailer. To determine  $C_D A$  values for a trailer, perform CFD modeling based on a tractor-trailer combination using a standard tractor. Perform all CFD modeling as follows:

(1) Except as described in paragraph (a)(9) of this section, specify a blockage ratio at or below 0.2 percent to simulate open-road conditions.

(2) Specify yaw angles according to § 1037.525(d)(1) for Phase 2 vehicles; assume zero yaw angle for Phase 1 vehicles.

(4) Model the tractor with an open grill and representative back pressures based on available data describing the tractor's pressure characteristics.

(5) Enable the turbulence model and mesh deformation.

(6) Model tires and ground plane in motion to simulate a vehicle moving forward in the direction of travel.

(7) Apply the smallest cell size to local regions on the tractor and trailer in areas of high flow gradients and smaller-geometry features (e.g., the A-pillar, mirror, visor, grille and accessories, trailer-leading edge, trailer-trailing edge, rear bogey, tires, and tractor-trailer gap).

(8) Simulate a vehicle speed of 55 mph.

(b) Take the following steps for CFD code with a Navier-Stokes formula solver:

(1) Perform an unstructured, time-accurate analysis using a mesh grid size with a total volume element count of at least 50 million cells of hexahedral and/or polyhedral mesh cell shape, surface elements representing the geometry consisting of no less than 6 million elements, and a near-wall cell size corresponding to a  $y^+$  value of less than 300.

(2) Perform the analysis with a turbulence model and mesh deformation enabled (if applicable) with boundary layer resolution of  $\pm 95$  percent. Once the results reach this resolution, demonstrate the convergence by supplying multiple, successive convergence values for the analysis. The

turbulence model may use k-epsilon (k- $\epsilon$ ), shear stress transport k-omega (SST k- $\omega$ ), or other commercially accepted methods.

(c) For Lattice-Boltzman based CFD code, perform an unstructured, time-accurate analysis using a mesh grid size with total surface elements of at least 50 million cells using cubic volume elements and triangular and/or quadrilateral surface elements with a near-wall cell size of no greater than 6 mm on local regions of the tractor and trailer in areas of high flow gradients and smaller geometry features, with cell sizes in other areas of the mesh grid starting at twelve millimeters and increasing in size from this value as the distance from the tractor and trailer increases.

(d) You may ask us to allow you to perform CFD analysis using parameters and criteria other than those specified in this section, consistent with good engineering judgment. In your request, you must demonstrate that you are unable to perform modeling based on the specified conditions (for example, you may have insufficient computing power, or the computations may require inordinate time), or you must demonstrate that different criteria (such as a different mesh cell shape and size) will yield better results. In your request, you must also describe your recommended alternative parameters and criteria, and describe how this approach will produce results that adequately represent a vehicle's in-use performance. We may require that you supply data demonstrating that your selected parameters and criteria will provide a sufficient level of detail to yield an accurate analysis. If you request an alternative approach because it will yield better results, we may require that you perform CFD analysis using both your recommended criteria and parameters and the criteria and parameters specified in this section to compare the resulting key aerodynamic characteristics, such as pressure profiles, drag build-up, and turbulent/laminar flow at key points around the tractor-trailer combination.

(e) Include the following information in your request to determine  $C_D A$  values using CFD for tractors:

(1) The name of the software.

(2) The date and version number of the software.

(3) The name of the company producing the software and the corresponding address, phone number, and Web site.

(4) Identify whether the software uses Navier-Stokes or Lattice-Boltzmann equations.

(5) Describe the input values you will use to simulate the vehicle's aerodynamic performance for comparing to coastdown results.

**§ 1037.533 Constant-speed procedure for calculating drag area ( $C_D A$ ).**

This section describes how to use constant-speed aerodynamic drag testing to determine  $C_D A$  values, subject to the provisions of § 1037.525.

(a) *Test track.* Select a test track that meets the specifications described in § 1037.527(c)(2).

(b) *Ambient conditions.* Ambient conditions must remain within the specifications described in § 1037.527(c) throughout the preconditioning and measurement procedure.

(c) *Vehicle preparation.* To determine  $C_D A$  values for a tractor, perform coastdown testing with a tractor-trailer combination using the manufacturer's tractor and a standard trailer. To determine  $C_D A$  values for a trailer, perform coastdown testing with a tractor-trailer combination using a standard tractor. Prepare tractors and trailers for testing as described in § 1037.527(b). Install measurement instruments meeting the requirements of 40 CFR part 1065, subpart C, that have been calibrated as described in 40 CFR part 1065, subpart D, as follows:

(1) Install a torque meter to measure torque at the vehicle's driveshaft, or measure torque from both sides of each drive axle using a half-shaft torque meter, a hub torque meter, or a rim torque meter. Set up instruments to read engine rpm for calculating rotational speed at the point of the torque measurements, or install instruments for measuring the rotational speed of the driveshaft, axles, or wheels directly.

(2) Install instrumentation to measure vehicle speed at 10 Hz, with an accuracy and resolution of 0.2 kph. Also install instrumentation for reading engine rpm from the engine's onboard computer.

(3) Mount an anemometer on the trailer as described in § 1037.527(f). For air speeds in the range of 65–130 kps and yaw angles in the range of  $0 \pm 7^\circ$ , the anemometer must have an accuracy that is  $\pm 1.5\%$  of measured air speed and is  $\pm 0.5^\circ$  of measured yaw angle.

(4) Fill the vehicle's fuel tanks to be at maximum capacity at the start of the measurement procedure.

(5) Measure total vehicle mass to the nearest 20 kg, with a full fuel tank, including the driver and any passengers that will be in the vehicle during the measurement procedure.

(d) *Measurement procedure.* The measurement sequence consists of vehicle preconditioning followed by

stabilization and measurement over five consecutive constant-speed test segments with three different speed setpoints (16, 80, and 113 kph). Each test segment is divided into smaller increments for data analysis.

(1) Precondition the vehicle and zero the torque meters as follows:

(i) If you are using rim torque meters, zero the torque meters by lifting each instrumented axle and recording torque signals for at least 30 seconds, and then drive the vehicle at 80 kph for at least 30 minutes.

(ii) If you are using any other kind of torque meter, drive the vehicle at 80 kph for at least 30 minutes, and then allow the vehicle to coast down from full speed to a complete standstill while the clutch is disengaged or the transmission is in neutral, without braking. Zero the torque meters within 60 seconds after the vehicle stops moving by recording the torque signals for at least 30 seconds, and directly resume vehicle preconditioning at 80 kph for at least 2 km.

(iii) You may calibrate instruments during the preconditioning drive.

(2) Perform testing as described in paragraph (d)(3) of this section over a sequence of test segments at constant vehicle speed as follows:

(i) 300±30 seconds in each direction at 16 kph.

(ii) 450±30 seconds in each direction at 80 kph.

(iii) 900±30 seconds in each direction at 113 kph.

(iv) 450±30 seconds in each direction at 80 kph.

(v) 300±30 seconds in each direction at 16 kph.

(3) When the vehicle preconditioning described in paragraph (d)(1) of this section is complete, stabilize the vehicle at the specified speed for at least 200

meters and start taking measurements. The test segment starts when you start taking measurements for all parameters.

(4) During the test segment, continue to operate the vehicle at the speed setpoint, maintaining constant speed and torque within the ranges specified in paragraph (e) of this section. Drive the vehicle straight with minimal steering; do not change gears. Perform measurements as follows during the test segment:

(i) Measure the rotational speed of the driveshaft, axle, or wheel where the torque is measured, or calculate it from engine rpm in conjunction with gear and axle ratios, as applicable.

(ii) Measure vehicle speed in conjunction with time-of-day data.

(iii) Measure ambient conditions, air speed, and air direction as described in § 1037.527(e) and (f). Correct air speed and air direction as described in paragraphs (f)(1) and (2) of this section.

(5) You may divide a test segment into multiple passes by suspending and resuming measurements. Stabilize vehicle speed before resuming measurements for each pass as described in paragraph (d)(3) of this section. Analyze the data from multiple passes by combining them into a single sequence of measurements for each test segment.

(6) Divide measured values into even 10-second increments. If the last increment for each test segment is less than 10 seconds, disregard measured values from that increment for all calculations under this section.

(e) *Validation criteria.* Analyze measurements to confirm that the test is valid. Analyze vehicle speed and drive torque by calculating the mean speed and torque values for each successive 1-second increment, for each successive 10-second increment, and for each test

segment. The test is valid if the data conform to all the following specifications:

(1) *Vehicle speed.* The mean vehicle speed for the test segment must be within 2.0 kph of the speed setpoint. In addition, for testing at 80 kph and 113 kph, all ten of the 1-second mean vehicle speeds used to calculate a corresponding 10-second mean vehicle speed must be within ±0.3 kph of that 10-second mean vehicle speed. Perform the same data analysis for testing at 16 kph, but apply a validation threshold of ±0.15 kph.

(2) *Drive torque.* All ten of the 1-second mean torque values used to calculate a corresponding 10-second mean torque value must be within ±10% of that 10-second mean torque value.

(3) *Torque drift.* Torque meter drift may not exceed ±1%. Determine torque meter drift by repeating the procedure described in paragraph (d)(1) of this section after testing is complete, except that driving the vehicle is necessary only to get the vehicle up to 80 kph as part of coasting to standstill.

(f) *Calculations.* Analyze measured data for each time segment after time-aligning all the data. Use the following calculations to determine  $C_D A$ :

(1) *Onboard air speed.* Correct onboard anemometer measurements for air speed using onboard measurements and measured ambient conditions as described in § 1037.527(f), except that you must divide the test segment into consecutive 10-second increments rather than 5-mph increments. Disregard data from the final increment of the test segment if it is less than 10 seconds. This analysis results in the following equation for correcting air speed measurements:

$$v_{\text{air}} = \alpha_0 + \alpha_1 \cdot v_{\text{air, meas}} \quad \text{Eq. 1037.533-1}$$

(2) *Yaw angle.* Correct the onboard anemometer measurements for air direction for each test segment as follows:

(i) Calculate arithmetic mean values for air speed,  $\bar{v}_{\text{air}}$ , wind speed,  $\bar{\theta}_w = 0$ , and wind direction,  $\bar{w}$ , over each 10-second increment for each test segment. Disregard data from the final increment

of the test segment if it is less than 10 seconds.

(ii) Calculate the theoretical air direction,  $\theta_{\text{air, th}}$ , for each 10-second increment using the following equation:

$$\bar{\theta}_{\text{air, th}} = -\text{asin} \left( \frac{\bar{w}}{\bar{v}_{\text{air}}} \cdot \sin(\bar{\theta}_w + \theta_{\text{veh}}) \right) \quad \text{Eq. 1037.533-2}$$

Where:

$\theta_{\text{veh}}$  = the vehicle direction, as described in § 1037.527(f)(2).

(iii) Perform a linear regression using paired values of  $\theta_{\text{air, th}}$  and measured air direction,  $\theta_{\text{air, meas}}$ , from each 10-second

increment for all 80 kph and 113 kph test segments to determine the air-



direction correction coefficients,  $\beta_0$  and  $\beta_1$ , based on the following equation:

$$\bar{\theta}_{\text{air,th}} = \beta_0 + \beta_1 \cdot \bar{\theta}_{\text{air,meas}} \quad \text{Eq. 1037.533-3}$$

(iv) For all 80 kph and 113 kph test segments, correct each measured value

of air direction using the following equation:

$$\theta_{\text{air}} = \beta_0 + \beta_1 \cdot \theta_{\text{air,meas}} \quad \text{Eq. 1037.533-4}$$

(3) *Traction force.* (i) Calculate a traction force in N for each

measurement using the following equation:

$$F_{\text{trac}} = \frac{T_{\text{total}}}{v_{\text{veh}}} \cdot \frac{n_{\text{eng}} \cdot \pi}{k_g \cdot k_a \cdot 30} - M \cdot a_g \cdot \frac{G}{100}$$

Where:

$T_{\text{total}}$  = the sum of all corrected torques at a point in time, in N·m.

$v_{\text{veh}}$  = vehicle speed in m/s (full precision).

$n_{\text{eng}}$  = mean engine speed in rpm (full precision).

$k_g$  = transmission gear ratio of the engaged gear.

$k_a$  = drive axle ratio.

$M$  = the measured vehicle mass, in kg

$a_g$  = acceleration of Earth's gravity, as described in 40 CFR 1065.630.

$G$  = instantaneous road grade, in percent (increase in elevation per 100 units horizontal length).

(ii) Calculate a mean traction force,  $\bar{F}_{\text{trac}}$ , in N for each 10-second increment by averaging all the calculated traction forces in each 10-second increment.

(4) *Determination of drag area.*

Calculate a vehicle's drag area as follows:

(i) Use Equation 1037.533-5 to calculate a single mean traction force for the two 16-kph test segments,  $\bar{F}_{\text{trac16}}$ . This value represents the mechanical drag force acting on the vehicle.

(ii) Calculate the mean aerodynamic force for each 10-second increment,

$\bar{F}_{\text{aero}}$ , from the 80 kph and 113 kph test segments by subtracting  $\bar{F}_{\text{trac16}}$  from  $\bar{F}_{\text{trac}}$ .

(iii) Average the corrected air speed and corrected yaw angle over every 10-second segment from the 80 kph and 113 kph test segments to determine  $\bar{v}_{\text{air}}$  and  $\theta_{\text{air}}$ .

(iv) Calculate  $C_D A$  for each 10-second increment from the 80 kph and 113 kph test segments using the following equation:

$$C_D A_i = \left[ \frac{2 \cdot \bar{F}_{\text{aero}}}{\bar{v}_{\text{air}}^2} \cdot \frac{R \cdot \bar{T}}{\bar{P}_{\text{act}}} \right]_i \quad \text{Eq. 1037.533-6}$$

Where:

$C_D A_i$  = the mean drag area for each 10-second increment,  $i$ .

$\bar{F}_{\text{aero}}$  = mean aerodynamic force over a given 10-second increment.

$\bar{V}_{\text{air[speed]}}$  = mean aerodynamic force over a given 10-second increment

$R$  = specific gas constant = 287.058 J/(kg·K).

$\bar{T}$  = mean air temperature in K.

$\bar{P}_{\text{act}}$  = mean absolute air pressure in Pa.

(v) Determine whether at least 75 percent of the 10-second increments

from the 80 kph and 113 kph test segments have a corrected yaw angle,  $\theta_{\text{air}}$ , that is within the range of  $|\theta_{\text{air}}| \leq 2^\circ$ . If so, this is considered a low-yaw test. If not, this is considered a high-yaw test.

(vi) For low-yaw tests, calculate a vehicle's characteristic zero-yaw drag area as the arithmetic mean of the drag areas representing all the 10-second increments for both 80 kph and 113 kph test segments that had.

(vii) For high-yaw tests, calculate a vehicle's characteristic zero-yaw drag area as follows:

(A) Plot all the  $C_D A$  values from the 80 kph and 113 kph test segments against the corresponding values for corrected yaw angle for each 10-second increment. Create a regression based on a fourth-order polynomial regression equation of the following form:

$$C_D A = C_{D A_{\text{ZeroYaw}}} + a_1 \bar{\theta}_{\text{air}} + a_2 \bar{\theta}_{\text{air}}^2 + a_3 \bar{\theta}_{\text{air}}^3 + a_4 \bar{\theta}_{\text{air}}^4 \quad \text{Eq. 1037.533-7}$$

(B) Determine  $C_{D A_{\text{ZeroYaw}}}$  as the y-intercept from the regression equation.

(g) *Documentation.* Keep the following records related to the

constant-speed procedure for calculating drag area:

(1) The measurement data for calculating  $C_D A$  as described in this section.

(2) A general description and pictures of the vehicle tested.

(3) The vehicle's maximum height and width.

(4) The measured vehicle mass.

(5) Mileage at the start of the first test segment and at the end of the last test segment.

(6) The date of the test, the starting time for the first test segment, and the ending time for the last test segment.

(7) The transmission gear used for each test segment.

(8) The data describing how the test was valid relative to the specifications and criteria described in paragraphs (b) and (e) of this section.

(9) A description of any unusual events, such as a vehicle passing the test vehicle, or any technical or human errors that may have affected the  $C_{DA}$  determination without invalidating the test.

#### § 1037.540 Special procedures for testing vehicles with hybrid power take-off.

This section describes the procedure for quantifying the reduction in greenhouse gas emissions for vehicles as a result of running power take-off (PTO) devices with a hybrid energy delivery system. The procedures are written to test the PTO by ensuring that the engine

produces all of the energy with no net change in stored energy. The full test for the hybrid vehicle is from a fully charged renewable energy storage system (RESS) to a depleted RESS and then back to a fully charged RESS. The procedures in paragraphs (a) through (e) of this section may be used for Phase 1 testing of any hybrid PTO architecture for which you are requesting a vehicle certificate using either chassis testing or powertrain testing. You must include all hardware for the PTO system. You may ask us to modify the provisions of this section to allow testing hybrid vehicles other than electric-battery hybrids, consistent with good engineering judgment. Phase 2 PTO greenhouse gas emission reductions are quantified using GEM and are described in paragraph (f) of this section.

(a) Select two vehicles for testing as follows:

(1) Select a vehicle with a hybrid energy delivery system to represent the vehicle family. If your vehicle family includes more than one vehicle model, use good engineering judgment to select

the vehicle type with the maximum number of PTO circuits that has the smallest potential reduction in greenhouse gas emissions.

(2) Select an equivalent conventional vehicle as specified in § 1037.615.

(b) Measure PTO emissions from the fully warmed-up conventional vehicle as follows:

(1) Without adding a restriction, instrument the vehicle with pressure transducers at the outlet of the hydraulic pump for each circuit. Perform pressure measurements with a frequency of at least 1 Hz.

(2) Operate the PTO system with no load for at least 15 seconds. Measure gauge pressure and record the average value over the last 10 seconds ( $\bar{P}_{min}$ ). Apply maximum operator demand to the PTO system until the pressure relief valve opens and pressure stabilizes; measure gauge pressure and record the average value over the last 10 seconds ( $\bar{P}_{max}$ ).

(3) Denormalize the PTO duty cycle in Appendix II of this part using the following equation:

$$P_{refi} = p_i \cdot (\bar{P}_{max} - \bar{P}_{min}) + \bar{P}_{min} \quad \text{Eq. 1037.540-1}$$

Where:

$P_{refi}$  = the reference pressure at each point  $i$  in the PTO cycle.

$p_i$  = the normalized pressure at each point  $i$  in the PTO cycle (relative to  $\bar{P}_{max}$ ).

$\bar{P}_{max}$  = the mean maximum pressure measured in paragraph (b)(2) of this section.

$\bar{P}_{min}$  = the mean minimum pressure measured in paragraph (b)(2) of this section.

(4) If the PTO system has two circuits, repeat paragraph (b)(2) and (3) of this section for the second PTO circuit.

(5) Install a system to control pressures in the PTO system during the cycle.

(6) Start the engine.

(7) Operate the vehicle over one or both of the denormalized PTO duty cycles in Appendix II of this part, as applicable. Measure emissions during operation over each duty cycle using the provisions of 40 CFR part 1066.

(8) Measured pressures must meet the cycle-validation specifications in the following table for each test run over the duty cycle:

TABLE 1 OF § 1037.540—STATISTICAL CRITERIA FOR VALIDATING EACH TEST RUN OVER THE DUTY CYCLE

Parameter <sup>a</sup>	Pressure
Slope, $a_1$ .....	$0.950 \leq a_1 \leq 1.030$

TABLE 1 OF § 1037.540—STATISTICAL CRITERIA FOR VALIDATING EACH TEST RUN OVER THE DUTY CYCLE—Continued

Parameter <sup>a</sup>	Pressure
Absolute value of intercept, $ a_0 $ .	$\leq 2.0\%$ of maximum mapped pressure
Standard error of estimate, $SEE$ .	$\leq 10\%$ of maximum mapped pressure
Coefficient of determination, $r^2$ .	$\geq 0.970$

<sup>a</sup> Determine values for specified parameters as described in 40 CFR 1065.514(e) by comparing measured values to denormalized pressure values from the duty cycle in Appendix II of this part.

(c) Measure PTO emissions from the fully warmed-up hybrid vehicle as follows:

(1) Perform the steps in paragraphs (b)(1) through (5) of this section.

(2) Prepare the vehicle for testing by operating it as needed to stabilize the battery at a full state of charge. For electric hybrid vehicles, we recommend running back-to-back PTO tests until engine operation is initiated to charge the battery. The battery should be fully charged once engine operation stops. The ignition should remain in the “on” position.

(3) Turn the vehicle and PTO system off while the sampling system is being prepared.

(4) Turn the vehicle and PTO system on such that the PTO system is functional, whether it draws power from the engine or a battery.

(5) Operate the vehicle over one or both of the denormalized PTO duty cycles without turning the vehicle off, until the engine starts and then shuts down. The test cycle is completed once the engine shuts down. Measure emissions as described in paragraph (b)(7) of this section. Use good engineering judgment to minimize the variability in testing between the two types of vehicles.

(6) Apply cycle-validation criteria as described in paragraph (b)(8) of this section.

(d) Calculate the equivalent distance driven based on operating time for the PTO portion of the test by determining the time of the test and applying the conversion factor in paragraph (d)(4) of this section. For testing where fractions of a cycle were run (for example, where three cycles are completed and the halfway point of a fourth PTO cycle is reached before the engine starts and shuts down again), calculate the time of the test,  $t_{test}$ , as follows:

(1) Add up the time run for all complete tests.

(2) For fractions of a test, use the following equation to calculate the time:

$$t_{\text{test-partial}} = \frac{\sum_{i=1}^N (p_{\text{circuit-1},i} + p_{\text{circuit-2},i}) \cdot \Delta t}{\bar{p}_{\text{circuit-1}} + \bar{p}_{\text{circuit-2}}} \quad \text{Eq. 1037.540-2}$$

Where:

$i$  = an indexing variable that represents one recorded value.

$N$  = number of measurement intervals.

$p_{\text{circuit-1}}$  = normalized pressure command from circuit 1 of the PTO cycle for each point,  $i$ , starting from  $i = 1$ .

$p_{\text{circuit-2}}$  = normalized pressure command from circuit 2 of the PTO cycle for each point,  $i$ , starting from  $i = 1$ . Let  $p_{\text{circuit-2}} = 0$  if there is only one circuit.

$\bar{p}_{\text{circuit-1}}$  = the mean normalized pressure command from circuit 1 over the entire PTO cycle.

$\bar{p}_{\text{circuit-2}}$  = the mean normalized pressure command from circuit 2 over the entire PTO cycle. Let  $\bar{p}_{\text{circuit-2}} = 0$  if there is only one circuit.

$\Delta t$  = the time interval between measurements. For example, at 100 Hz,  $\Delta t = 0.0100$  seconds.

(3) Sum the time from the complete cycles and from the partial cycle.

(4) Divide the total PTO operating time from paragraph (d)(3) of this section by a conversion factor of 0.0144 hr/mi to determine the equivalent distance driven. This is based on an assumed fraction of engine operating time during which the PTO is operating of 28 percent, and an assumed average vehicle speed while driving of 27.1 mph, as follows:

$$\text{Factor} = \frac{28\%}{(100\% - 28\%) \cdot 27.1} = 0.0144 \text{ hr/mi}$$

(e) For Phase 1, calculate combined cycle-weighted emissions of the four duty cycles for vocational vehicles, for both the conventional and hybrid PTO vehicle tests, as follows:

(1) Calculate the CO<sub>2</sub> emission rates in grams per test without rounding.

(2) Divide the CO<sub>2</sub> mass from the PTO cycle by the distance determined in paragraph (d)(4) of this section and the standard payload to get the CO<sub>2</sub> emission rate in g/ton-mile.

(3) Calculate the g/ton-mile emission rate for the driving portion of the test specified in § 1037.510 and add this to the CO<sub>2</sub> g/ton-mile emission rate for the PTO portion of the test.

(4) Follow the provisions of § 1037.615 to calculate improvement factors and benefits for advanced technologies.

(f) For Phase 2, calculate the delta PTO fuel results for input into GEM during vehicle certification as follows:

(1) Calculate fuel consumption in grams per test,  $m_{\text{fuelPTO}}$ , without rounding, as described in § 1037.550(k)(1).

(2) Divide the fuel mass by the distance determined in paragraph (d)(4) of this section and the standard payload to determine the fuel rate in g/ton-mile.

(3) Calculate the difference between the conventional PTO emissions result and the hybrid PTO emissions result for input into GEM.

(g) If the PTO system has more than two circuits, apply to provisions of this

section using good engineering judgment.

#### § 1037.550 Powertrain testing.

This section describes the procedure for simulating a chassis test for both conventional and hybrid powertrains. This testing is an optional approach that replaces the fuel map in GEM for certifying Phase 2 vehicles. It applies for vehicle manufacturers, but engine manufacturers may perform testing under this section as specified in 40 CFR 1036.630 and § 1037.551. While this section includes the detailed equations, you need to develop your own driver model and vehicle model; we recommend that you use the MATLAB/Simulink code provided at [www.epa.gov/otaq/climate/gem.htm](http://www.epa.gov/otaq/climate/gem.htm).

(a) Perform the powertrain test to establish measured fuel-consumption rates at a range of engine speed and load settings. Also measure NO<sub>x</sub> emissions during each of the specified sampling periods consistent with the data requirements 40 CFR part 86, subpart T. You may use emission-measurement systems meeting the specifications of 40 CFR part 1065, subpart J, to measure NO<sub>x</sub> emissions. This section uses engine parameters and variables that are consistent with 40 CFR part 1065. For molar mass values, see 40 CFR 1065.1005(f)(2).

(b) Select fuel-consumption rates (g/cycle) to characterize the powertrain emissions at each setting. These

declared values may not be lower than any corresponding measured values determined in this section. You may select any value that is at or above the corresponding measured value. These declared fuel-consumption rates serve as worst-case values for certification.

(c) Select a test engine and powertrain as described in § 1037.235.

(d) Set up the engine according to 40 CFR 1065.110. The default test configuration involves connecting the powertrain's transmission output shaft directly to the dynamometer. You may instead set up the dynamometer to connect at the wheel hubs if your powertrain configuration requires it, such as for hybrid powertrains, or if you want to represent the axle performance with powertrain test results. If you connect at the wheel hubs, input your test results into GEM to reflect this.

(e) Cool the powertrain during testing so temperatures for intake-air, oil, coolant, block, head, transmission, battery, and power electronics are within their expected ranges for normal operation. You may use auxiliary coolers and fans.

(f) Set the dynamometer to operate in speed control. Record data as described in 40 CFR 1065.202. Design a vehicle model to measure torque and calculate the dynamometer speed setpoint at a rate of at least 100 Hz, as follows:

(1) Calculate the dynamometer's angular speed target,  $f_{\text{nref,dyno}}$ , based on the simulated linear speed of the tires:

$$f_{\text{nrefi,dyno}} = \frac{k_a}{2 \cdot \pi \cdot r} \cdot v_{\text{refi}} \quad \text{Eq. 1037.550-1}$$

Where:

$$r_{[\text{speed}]} = \text{tire radius} = \frac{k_a \cdot k_{\text{topgear}} \cdot v_{65}}{2 \cdot \pi \cdot f_{n[\text{speed}]}} \quad \text{Eq. 1037.550-2}$$

$k_a$  = drive axle ratio. Set  $k_a = 4.0$  for all calculations in this paragraph (f).  
 $k_{\text{topgear}}$  = transmission gear ratio in the highest available gear.

$v_{65}$  = reference speed. Use 65 mph = 29.05 m/s.  
 $f_{n[\text{speed}]}$  = engine's angular speed determined in paragraph (h) of this section.

$$v_{\text{refi}} = \left( \frac{k_d \cdot T_{i-1}}{r} \cdot (Eff_{\text{axle}}) - \left( M \cdot g \cdot C_{rr} \cdot \cos(\text{atan}(G_{i-1})) + \frac{\rho \cdot C_D A}{2} \cdot v_{\text{refi},i-1}^2 \right) - F_{\text{brake},i-1} - F_{\text{grade},i-1} \right) \cdot \frac{\Delta t_{i-1}}{M + M_{\text{rotating}}} + v_{\text{refi},i-1} \quad \text{Eq. 1037.550-3}$$

Where:

$v_{\text{refi}}$  = simulated vehicle reference speed. Use the unrounded result for calculating  $f_{\text{nrefi,dyno}}$ .  
 $i$  = a time-based counter corresponding to each measurement during the sampling period. Let  $v_{\text{refi}} = 0$ ; start calculations at  $i = 2$ . A 10-minute sampling period will generally involve 60,000 measurements.  
 $T$  = instantaneous measured torque.

$Eff_{\text{axle}}$  = axle efficiency. Use  $Eff_{\text{axle}} = 0.955$  for  $T > 0$ , and use  $Eff_{\text{axle}} = 1/0.955$  for  $T < 0$ . To calculate  $f_{\text{nrefi,dyno}}$  for a dynamometer connected at the wheel hubs, as described in paragraph (f)(2) of this section, use  $Eff_{\text{axle}} = 1.0$ .  
 $M$  = vehicle mass for a vehicle class as determined in paragraph (h) of this section.  
 $g$  = gravitational constant = 9.81 m/s<sup>2</sup>.

$C_{rr}$  = coefficient of rolling resistance for a vehicle class as determined in paragraph (h) of this section.  
 $G_{i-1}$  = the percent grade interpolated at distance,  $D_{i-1}$  from the duty cycle in Appendix IV corresponding to measurement ( $i-1$ ).

$$D_{i-1} = \sum_{i=1}^N (v_{\text{refi},i-1} \cdot \Delta t_{i-1}) \quad \text{Eq. 1037.550-4}$$

$\rho$  = air density at reference conditions. Use  $\rho = 1.17 \text{ kg/m}^3$ .

$C_D A$  = drag area for a vehicle class as determined in paragraph (h) of this section.

$F_{\text{brake}}$  = instantaneous braking force applied by the driver model.

$$F_{\text{grade},i-1} = M \cdot g \cdot \sin(\text{atan}(G_{i-1})) \quad \text{Eq. 1037.550-5}$$

$\Delta t$  = the time interval between measurements. For example, at 100 Hz,  $\Delta t = 0.0100$  seconds.

$M_{\text{rotating}}$  = inertial mass of rotating components as determined in paragraph (h) of this section.

*Example:* Example is for Class 2b to 7 vocational vehicles with 6 speed automatic transmission at B speed (Test 4 in Table 1 of § 1037.550).  
 $k_a = 4.0$   
 $k_{\text{topgear}} = 0.6716$

$f_{\text{nrefB}} = 1870 \text{ rpm} = 31.16 \text{ r/s}$   
 $v_{65} = 65 \text{ mph} = 29.05 \text{ m/s}$   
 $T_{1000-1} = 500.0 \text{ N}\cdot\text{m}$   
 $C_{rr} = 6.9 \text{ kg/ton} = 6.9 \cdot 10^{-3} \text{ kg/kg}$   
 $M = 11408 \text{ kg}$   
 $C_D A = 5.4 \text{ m}^2$   
 $G_{1000-1} = 1.0\% = 0.018$

$$D_{1000-1} = \sum_{i=1}^{1000} (19.99 \cdot 0.01 + 20.0 \cdot 0.01 + \dots + v_{\text{refi},1000-1} \cdot \Delta t_{1000-1}) = 1367 \text{ m}$$

$F_{\text{brake},1000} = 0 \text{ N}$   
 $V_{\text{ref},1000} = 20.0 \text{ m/s}$

$F_{\text{grade},1000} = 11408 \cdot 9.81 \cdot \sin(\text{atan}(0.018)) = 2014. \text{ N}$

$\rho \Delta t = 0.0100 \text{ s}$   
 $M_{\text{rotating}} = 454 \text{ kg}$

$$r_B = \frac{4.0 \cdot 0.6716 \cdot 29.05}{2 \cdot \pi \cdot 31.16} = 0.399 \text{ m}$$

$$v_{\text{ref}1000} = \left( \frac{4.0 \cdot 500.0}{0.399} \cdot (0.955) - \left( 11408 \cdot 9.81 \cdot 6.9 \cdot \cos(\text{atan}(0.018)) + \frac{1.17 \cdot 5.4}{2} \cdot 20.0^2 \right) - 0 - 2014.1 \right) \cdot \frac{0.0100}{11408 + 454} + 20.0$$

$$v_{\text{ref}1000} = 20.00128 \text{ m/s}$$

$$f_{\text{nref}1000, \text{dyno}} = \frac{20.00128 \cdot 4.28}{2 \cdot 3.14 \cdot 0.462} = 31.9515 \text{ r/s} = 1917.09 \text{ rpm}$$

(2) For testing with the dynamometer connected at the wheel hubs, calculate  $f_{\text{nref}, \text{dyno}}$  using the following equation:

$$f_{\text{nref}, \text{dyno}} = \frac{v_{\text{ref}}}{2 \cdot \pi \cdot r} \quad \text{Eq. 1037.550-6}$$

(g) Design a driver model to mimic a human driver modulating the throttle and brake pedals to follow the test cycle as closely as possible. The driver model must meet the speed requirements for operation over the cruise cycles as described in § 1037.510 and for operation over the transient cycle as described in 40 CFR 1066.425(b). Design

the driver model to meet the following specifications:

(1) Send a brake signal when throttle position is zero and vehicle speed is greater than the reference vehicle speed from the test cycle. Include a delay before changing the brake signal to prevent dithering, consistent with good engineering judgment.

(2) Allow braking only if throttle position is zero.

(3) Compensate for the distance driven over the duty cycle over the course of the test. Use the following equation to perform the compensation in real time to determine your time in the cycle:

$$t_{\text{cycle}_i} = \sum_{i=1}^N \left( \left( \frac{v_{\text{vehicle}, i-1}}{v_{\text{cycle}, i-1}} \right) \cdot \Delta t_{i-1} \right) \quad \text{Eq. 1037.550-7}$$

Where:

$V_{\text{vehicle}}$  = measured vehicle speed.

$V_{\text{cycle}}$  = reference speed from the test cycle. If

$V_{\text{cycle}, i-1} < 1.0 \text{ m/s}$ , set  $V_{\text{cycle}, i-1} = V_{\text{vehicle}, i-1}$ .

(h) Set up the driver model and the vehicle model in the test cell to test the powertrain, as follows:

(1) For Class 2b through Class 7 vocational vehicles, test the powertrain over eight different test runs. For all test runs, set  $M_{\text{rotating}}$  to 454 kg,  $C_D A$  to 5.4,  $k_a$  to 4.0, and  $Eff_{\text{axle}}$  to 0.955. Set the tire radius,  $r$ , for each test run based on the vehicle configuration corresponding to

the designated engine speed (A, B, C, or  $f_{\text{ntest}}$ , all from 40 CFR part 1065) at 65 mph. These engine speeds apply equally for spark-ignition engines. Use the following settings specific to each test run:

TABLE 1 OF § 1037.550—VEHICLE SETTINGS FOR POWERTRAIN TESTING OF CLASS 2b THROUGH CLASS 7 VOCATIONAL VEHICLES

	Test 1	Test 2	Test 3	Test 4	Test 5	Test 6	Test 7	Test 8
$M$ (kg) .....	7,257	11,408	7,257	11,408	7,257	11,408	7,257 .....	11,408.
$C_{rr}$ (kg/metric ton) .....	6.7	6.9	6.7	6.9	6.7	6.9	6.7 .....	6.9.
$r$ at engine speed .....	A	A	B	B	C	C	Maximum test speed	Maximum test speed.

(2) For tractors and Class 8 vocational vehicles, test the powertrain over nine different test runs. For all test runs, set  $C_{rr}$  to 6.9,  $k_a$  to 4.0, and  $Eff_{\text{axle}}$  to 0.955. Set the tire radius,  $r$ , for each test run based on the vehicle configuration

corresponding to the designated engine speed (the minimum NTE exclusion speed as determined in 40 CFR 86.1370(b)(1), B, or  $f_{\text{ntest}}$  from 40 CFR part 1065) at 65 mph. Use the settings specific to each test run from Table 2 of

this section for general purpose vehicles, and from Table 3 of this section for heavy-haul tractors. Tables 2 and 3 follow:

TABLE 2 OF § 1037.550—VEHICLE SETTINGS FOR POWERTRAIN TESTING OF TRACTORS AND CLASS 8 VOCATIONAL VEHICLES—GENERAL PURPOSE VEHICLES

	Test 1	Test 2	Test 3	Test 4	Test 5	Test 6	Test 7	Test 8	Test 9
<i>M</i> (kg) .....	31,978 .....	22,679 .....	19,051 .....	31,978 .....	22,679 .....	19,051 .....	31,978 .....	22,679 .....	19,051 .....
<i>C<sub>D</sub>A</i> .....	5.4 .....	4.7 .....	4.0 .....	5.4 .....	4.7 .....	4.0 .....	5.4 .....	4.7 .....	4.0 .....
<i>M<sub>rotating</sub></i> (kg) .....	1,134 .....	907 .....	680 .....	1,134 .....	907 .....	680 .....	1,134 .....	907 .....	680 .....
<i>r</i> at engine speed.	Minimum NTE exclusion speed.	Minimum NTE exclusion speed.	Minimum NTE exclusion speed.	B .....	B .....	B .....	Maximum test speed.	Maximum test speed.	Maximum test speed.

TABLE 3 OF § 1037.550—VEHICLE SETTINGS FOR POWERTRAIN TESTING OF HEAVY-HAUL TRACTORS

	Test 1	Test 2	Test 3	Test 4	Test 5	Test 6	Test 7	Test 8	Test 9
<i>M</i> (kg) .....	40,895 .....	31,978 .....	22,679 .....	40,895 .....	31,978 .....	22,679 .....	40,895 .....	31,978 .....	22,679 .....
<i>C<sub>D</sub>A</i> .....	6.1 .....	5.4 .....	4.7 .....	6.1 .....	5.4 .....	4.7 .....	6.1 .....	5.4 .....	4.7 .....
<i>M<sub>rotating</sub></i> (kg) .....	1,134 .....	907 .....	680 .....	1,134 .....	907 .....	680 .....	1,134 .....	907 .....	680 .....
<i>r</i> at engine speed .....	Minimum NTE exclusion speed.	Minimum NTE exclusion speed.	Minimum NTE exclusion speed.	B .....	B .....	B .....	Maximum test speed.	Maximum test speed.	Maximum test speed.

(i) Operate the powertrain over each of the duty cycles specified in § 1037.510(a)(2).

(j) Collect and measure emissions as described in 40 CFR part 1065. For hybrid powertrains, correct for the net energy change of the energy storage device as described in 40 CFR 1066.501.

(k) For each test point, validate the measured output speed with the corresponding reference values. You may delete points when the vehicle is stopped. Apply cycle-validation criteria for each separate transient or cruise cycle based on the following parameters:

TABLE 4 OF § 1037.550—STATISTICAL CRITERIA FOR VALIDATING DUTY CYCLES

Parameter <sup>a</sup>	Speed control
Slope, <i>a</i> <sub>1</sub> .....	$0.990 \leq a_1 \leq 1.010$ .
Absolute value of intercept, $ a_0 $ .....	$\leq 2.0\%$ of maximum test speed.
Standard error of estimate, <i>SEE</i> .....	$\leq 2.0\%$ of maximum test speed.
Coefficient of determination, <i>r</i> <sup>2</sup> .....	$\geq 0.990$ .

<sup>a</sup> Determine values for specified parameters as described in 40 CFR 1065.514(e) by comparing measured and reference values for *f<sub>nref,dyno</sub>*.

(l) [Reserved]

(m) Calculate mass of fuel consumed for all duty cycles except idle as follows:

(1) For measurements involving measured fuel mass flow rate, calculate the mass of fuel for each duty cycle, *m<sub>fuel[cycle]</sub>*, as follows:

$$m_{\text{fuel}} = \sum_{i=1}^N \dot{m}_{\text{fuel}i} \cdot \Delta t \quad \text{Eq. 1037.550-8}$$

Where:

*N* = total number of measurements over the duty cycle. For batch fuel mass measurements, set *N* = 1.

*i* = an indexing variable that represents one recorded value.

*m<sub>fueli</sub>* = the fuel mass flow rate, for each point, *i*, starting from *i* = 1.

$\Delta t = 1/f_{\text{record}}$

*f<sub>record</sub>* = the data recording frequency.

Example:

*N* = 6680

*m<sub>fuel1</sub>* = 1.856 g/s

*m<sub>fuel2</sub>* = 1.962 g/s

*f<sub>record</sub>* = 10 Hz

$\Delta t = 1/10 = 0.1$  s

*m<sub>fueltransient</sub>* = (1.856 + 1.962 + ... + *m<sub>fuel6680</sub>*) · 0.1

*m<sub>fueltransient</sub>* = 111.95 g

(2) For tests using emission measurements (CO<sub>2</sub>, CO, and THC) rather than measured fuel mass flow rate, calculate the mass of fuel for each duty cycle, *m<sub>fuel[cycle]</sub>*, as follows:

(i) For calculations that use continuous measurement of emissions, calculate *m<sub>fuel[cycle]</sub>* using the following equation:

$$m_{\text{fuel[cycle]}} = \frac{M_C}{w_{\text{Cmeas}}} \cdot \left( \sum_{i=1}^{N_{\text{event}}} \left( \dot{n}_{\text{exhi}} \cdot \frac{x_{\text{Ccombdry}_i}}{1 + x_{\text{H}_2\text{Oexhdry}_i}} \cdot \Delta t_{\text{[event]}} \right) - \frac{1}{M_{\text{CO}_2}} \sum_{j=1}^{N_{\text{event}}} \left( \dot{m}_{\text{CO}_2\text{urea}_j} \cdot \Delta t_{\text{[event]}} \right) \right) \quad \text{Eq. 1037.550-9}$$

Where:

*N<sub>[event]</sub>* = total number of measurements over the duty cycle.

*i* = an indexing variable that represents one recorded emission value.

*w<sub>Cmeas</sub>* = carbon mass fraction of fuel as determined by 40 CFR 1065.655(d),

except that you may not use the default properties in Table 1 of 40 CFR 1065.655 to determine  $\alpha$ ,  $\beta$ , and *w<sub>C</sub>* for liquid fuels.

$\dot{n}_{\text{exh}}$  = exhaust molar flow rate from which you measured emissions.  
 $\chi_{\text{Ccombdry}}$  = amount of carbon from fuel in the exhaust per mole of dry exhaust.  
 $\chi_{\text{H2Oexhdry}}$  = amount of H<sub>2</sub>O in exhaust per mole of exhaust.  
 $j$  = an indexing variable that represents one recorded mass emission rate of CO<sub>2</sub> from urea value.  
 $\dot{m}_{\text{CO2urea}j}$  = mass emission rate of CO<sub>2</sub> from the contribution of urea decomposition over the duty cycle as determined from

40 CFR 1036.535(a)(8). If your engine does not utilize urea SCR for emission control, or if you choose not to perform this correction, set this value equal to 0.

*Example:*

$M_{\text{C}} = 12.0107$  g/mol  
 $w_{\text{Cmeas}} = 0.867$   
 $N_{\text{emission}} = 6680$   
 $N_{\text{CO2urea}} = 668$   
 $\dot{n}_{\text{exh}1} = 2.876$  mol/s  
 $\dot{n}_{\text{exh}2} = 2.224$  mol/s

$\chi_{\text{Ccombdry}1} = 2.61 \cdot 10^{-3}$  mol/mol  
 $\chi_{\text{Ccombdry}2} = 1.91 \cdot 10^{-3}$  mol/mol  
 $\chi_{\text{H2Oexh}1} = 3.53 \cdot 10^{-2}$  mol/mol  
 $\chi_{\text{H2Oexh}2} = 3.13 \cdot 10^{-2}$  mol/mol  
 $f_{\text{record-emission}} = 10$  Hz  
 $\Delta t_{\text{emission}} = 1/10 = 0.1$  s  
 $M_{\text{CO2}} = 44.0095$  g/mol  
 $f_{\text{record-CO2urea}} = 1$  Hz  
 $\Delta t_{\text{CO2urea}} = 1/1 = 1.0$  s  
 $\dot{m}_{\text{CO2urea}1} = 0.0726$  g/s  
 $\dot{m}_{\text{CO2urea}2} = 0.0751$  g/s

$$m_{\text{fueltransient}} = \frac{12.0107}{0.867} \cdot \left( \begin{aligned} & 2.876 \cdot \frac{2.61 \cdot 10^{-3}}{1 + 3.53 \cdot 10^{-2}} \cdot 0.1 + \\ & 2.224 \cdot \frac{1.91 \cdot 10^{-3}}{1 + 3.13 \cdot 10^{-2}} \cdot 0.1 + \\ & \dots + \dot{n}_{\text{exh}6680} \cdot \frac{\chi_{\text{Ccombdry}6680}}{1 + \chi_{\text{H2Oexhdry}6680}} \cdot \Delta t_{6680} \\ & - \frac{1}{44.0095} \cdot (0.0726 \cdot 1.0 + 0.0751 \cdot 1.0 + \dots + \dot{m}_{\text{CO2urea}668} \cdot \Delta t_{668}) \end{aligned} \right)$$

$m_{\text{CO2transient}} = 1619.6$  g

(ii) If you measure batch emissions, calculate  $m_{\text{fuel[cycle]}}$  using the following equation:

$$m_{\text{fuel[cycle]}} = \frac{M_{\text{C}}}{w_{\text{Cmeas}}} \cdot \left( \frac{\bar{\chi}_{\text{Ccombdry}}}{1 + \bar{\chi}_{\text{H2Oexhdry}}} \cdot \sum_{i=1}^{N_{\text{event}}} (\dot{n}_{\text{exh}i} \cdot \Delta t_{\text{event}i}) - \frac{1}{M_{\text{CO2}}} \sum_{j=1}^{N_{\text{event}}} (\dot{m}_{\text{CO2urea}j} \cdot \Delta t_{\text{event}j}) \right) \quad \text{Eq. 1037.550-10}$$

(iii) If you measure continuous emissions and batch CO<sub>2</sub> from urea,

calculate  $m_{\text{fuel[cycle]}}$  using the following equation:

$$m_{\text{fuel[cycle]}} = \frac{M_{\text{C}}}{w_{\text{Cmeas}}} \cdot \left( \sum_{i=1}^{N_{\text{event}}} \left( \dot{n}_{\text{exh}i} \cdot \frac{\chi_{\text{Ccombdry}i}}{1 + \chi_{\text{H2Oexhdry}i}} \cdot \Delta t_{\text{event}i} \right) - \frac{m_{\text{CO2urea}}}{M_{\text{CO2}}} \right) \quad \text{Eq. 1037.550-11}$$

(iv) If you measure batch emissions and batch CO<sub>2</sub> from urea, calculate

$m_{\text{fuel[cycle]}}$  using the following equation:

$$m_{\text{fuel[cycle]}} = \frac{M_{\text{C}}}{w_{\text{Cmeas}}} \cdot \left( \frac{\bar{\chi}_{\text{Ccombdry}}}{1 + \bar{\chi}_{\text{H2Oexhdry}}} \cdot \sum_{i=1}^{N_{\text{event}}} (\dot{n}_{\text{exh}i} \cdot \Delta t_{\text{event}i}) - \frac{m_{\text{CO2urea}}}{M_{\text{CO2}}} \right) \quad \text{Eq. 1037.550-12}$$

(n) Determine the mass of fuel consumed at idle as follows:

(1) Measure fuel consumption with a fuel flow meter and report the mean fuel

mass flow rate for each duty cycle,  $\bar{m}_{\text{fuelidle}}$ .

(2) For measurements that do not involve measured fuel mass flow rate,

calculate the fuel mass flow rate for each duty cycle,  $\bar{m}_{\text{fuelidle}}$ , for each set of vehicle settings, as follows:

$$\bar{m}_{\text{fuelidle}} = \frac{M_{\text{C}}}{w_{\text{Cmeas}}} \cdot \left( \bar{n}_{\text{exh}} \cdot \frac{\bar{\chi}_{\text{Ccombdry}}}{1 + \bar{\chi}_{\text{H2Oexhdry}}} - \frac{\bar{m}_{\text{CO2urea}}}{M_{\text{CO2}}} \right) \quad \text{Eq. 1037.550-13}$$

Where:

$\bar{n}_{\text{exh}}$  = the mean raw exhaust molar flow rate from which you measured emissions.

$\dot{m}_{\text{CO2urea}}$  = mass emission rate of CO<sub>2</sub> from the contribution of urea decomposition over

the duty cycle as determined from 40 CFR 1036.535(a)(8), for each point,  $i$ , starting from  $i = 1$ . If your engine does not utilize urea SCR for emission control, or if you choose not to perform this correction, set this value equal to 0.

$M_C$  = molar mass of carbon.

$w_{Cmeas}$  = carbon mass fraction of fuel as determined by 40 CFR 1065.655(d), except that you may not use the default properties in Table 1 of 40 CFR 1065.655

to determine  $\alpha$ ,  $\beta$ , and  $w_C$  for liquid fuels.

$\bar{n}_{exh}$  = the mean raw exhaust molar flow rate from which you measured emissions according to 40 CFR 1065.655.

$\bar{\chi}_{Ccombdry}$  = the mean concentration of carbon from fuel in the exhaust per mole of dry exhaust.

$\bar{\chi}_{H_2Oexhdry}$  = the mean concentration of  $H_2O$  in exhaust per mole of dry exhaust.

$\bar{m}_{CO_2urea}$  = the mean  $CO_2$  mass emission rate from urea decomposition as described in paragraph (c)(9) of this section. If your engine does not utilize urea SCR for emission control, or if you choose not to perform this correction, set  $\bar{m}_{CO_2urea}$  equal to 0.

$M_{CO_2}$  = molar mass of carbon dioxide.

*Example:*

$$M_C = 12.0107 \text{ g/mol}$$

$$w_{Cmeas} = 0.867$$

$$\bar{n}_{exh} = 25.534 \text{ mol/s}$$

$$x_{Ccombdry} = 2.805 \cdot 10^{-3} \text{ mol/mol}$$

$$x_{H_2Oexhdry} = 3.53 \cdot 10^{-2} \text{ mol/mol}$$

$$\bar{m}_{CO_2urea} = 0.0726 \text{ g/s}$$

$$M_{CO_2} = 44.0095$$

$$\bar{m}_{fuelidle} = \frac{12.0107}{0.867} \cdot \left( 25.534 \cdot \frac{2.805 \cdot 10^{-3}}{1 + 3.53 \cdot 10^{-2}} - \frac{0.0726}{44.0095} \right)$$

$$\bar{m}_{fuelidle} = 0.405 \text{ g/s} = 1458.6 \text{ g/hr}$$

(o) Use the results of powertrain testing to determine GEM inputs as described in this paragraph (o). Declare a fuel mass consumption rate at idle  $\bar{m}_{fuelidle}$ , as described in paragraph (b) of this section. Include additional parameters for each of the eight or nine

simulated vehicle configurations as follows:

(1) Your declared fuel mass consumption for both cruise cycles and for the transient cycle,  $m_{fuel[cycle]}$ , as described in paragraph (b) of this section.

(2) Powertrain output speed per unit of vehicle speed. If the test is done with the dynamometer connected at the wheel hubs set  $k_a$  to the axle ratio of the rear axle that was used in the test. If the vehicle does not have a drive axle, such as hybrid vehicles with direct electric drive, let  $k_a = 1$ .

$$\frac{f_{npowertrain}}{v_{powertrain}} = \frac{k_a}{2 \cdot \pi \cdot r_{[speed]}}$$

(3) Positive work,  $W_{[cycle]powertrain}$ , over the duty cycle at the transmission

output or wheel hubs from the powertrain test.

(4) The following table illustrates the GEM data inputs corresponding to the different vehicle configurations:



Table 5 of § 1037.550 – Example test result output matrix for Class 8 vehicles.

	Test 1	Test 2	Test 3	Test 4	Test 5	Test 6	Test 7	Test 8	Test 9
$m_{\text{fuel[cycle]powertrain}}$									
$\frac{f_{\text{npowertrain}}}{v_{\text{powertrain}}}$									
$W_{\text{[cycle]powertrain}}$									

(p) Correct each fuel-consumption result from paragraph (o) of this section for the test fuel's mass-specific net energy content as described in 40 CFR 1036.530.

(q) For each test run, record the engine speed and torque as defined in 40 CFR 1065.915(d)(5) with a minimum sampling frequency of 1 Hz. These engine speed and torque values represent a duty cycle that can be used for separate testing with an engine mounted on an engine dynamometer, such as for a selective enforcement audit as described in § 1037.301.

#### § 1037.551 Engine-based simulation of powertrain testing.

Section 1037.550 describes how to measure fuel consumption over specific duty cycles with an engine coupled to a transmission; § 1037.550(q) describes how to create equivalent duty cycles for repeating those same measurements with just the engine. This § 1037.551 describes how to perform this engine testing to simulate the powertrain test. These engine-based measurements may be used for confirmatory testing as described in § 1037.235, or for selective enforcement audits as described in § 1037.301, as long as the test engine's operation represents the engine operation observed in the powertrain test.

(a) Use the procedures of 40 CFR part 1065 to set up the engine, measure emissions, and record data. Measure individual parameters and emission constituents as described in this section.

Measure NO<sub>x</sub> emissions during each of the specified sampling periods consistent with the data requirements 40 CFR part 86, subpart T. You may use emission-measurement systems meeting the specifications of 40 CFR part 1065, subpart J, to measure NO<sub>x</sub> emissions. For hybrid powertrains, correct for the net energy change of the energy storage device as described in 40 CFR 1066.501.

(b) Operate the engine over the applicable engine duty cycles corresponding to the vehicle cycles specified in § 1037.510(a)(2) for powertrain testing over the applicable vehicle simulations described in § 1037.550(h). Warm up the engine to prepare for the transient test or one of the cruise cycles by operating it one time over one of the simulations of the corresponding duty cycle. Warm up the engine to prepare for the idle test by operating it over a simulation of the 65-mph cruise cycle for 600 seconds. Within 60 seconds after concluding the warm up cycle, start emission sampling while the engine operates over the duty cycle. You may perform any number of test runs directly in succession once the engine is warmed up. Perform cycle validation as described in 40 CFR 1065.514 for engine speed, torque, and power.

(c) Calculate the mass of fuel consumed as described in § 1037.550(m) and (n). Correct each measured value for the test fuel's mass-specific net energy content as described in 40 CFR 1036.530. Use these corrected values to determine whether the engine's

emission levels conform to the declared fuel-consumption rates from the powertrain test.

#### § 1037.555 Special procedures for testing Phase 1 post-transmission hybrid systems.

This section describes the procedure for simulating a chassis test with a pre-transmission or post-transmission hybrid system for A to B testing of Phase 1 vehicles. These procedures may also be used to perform A to B testing with non-hybrid systems. See § 1037.550 for Phase 2 hybrid systems.

(a) Set up the engine according to 40 CFR 1065.110 to account for work inputs and outputs and accessory work.

(b) Collect CO<sub>2</sub> emissions while operating the system over the test cycles specified in § 1037.510(a)(1).

(c) Collect and measure emissions as described in 40 CFR part 1066. Calculate emission rates in grams per ton-mile without rounding. Determine values for *A*, *B*, *C*, and *M* for the vehicle being simulated as specified in 40 CFR part 1066. If you will apply an improvement factor or test results to multiple vehicle configurations, use values of *A*, *B*, *C*, *M*, *k<sub>a</sub>*, and *r* that represent the vehicle configuration with the smallest potential reduction in greenhouse gas emissions as a result of the hybrid capability.

(d) Calculate the transmission output shaft's angular speed target for the driver model,  $f_{\text{nref,driver}}$ , from the linear speed associated with the vehicle cycle using the following equation:

$$f_{\text{nref,driver}} = \frac{v_{\text{cycle}_i} \cdot k_a}{2 \cdot \pi \cdot r} \quad \text{Eq. 1037.555-1}$$

Where:

$v_{\text{cycle}_i}$  = vehicle speed of the test cycle for each point, *i*, starting from *i*=1.

$k_a$  = drive axle ratio, as declared by the manufacturer.

*r* = radius of the loaded tires, as declared by the manufacturer.

(e) Use speed control with a loop rate of at least 100 Hz to program the dynamometer to follow the test cycle, as follows:

(1) Calculate the transmission output shaft's angular speed target for the dynamometer,  $f_{\text{nref,dyno}}$ , from the measured linear speed at the dynamometer rolls using the following equation:

$$f_{\text{ref}_{i,\text{dyno}}} = \frac{v_{\text{ref}_i} \cdot k_a}{2 \cdot \pi \cdot r} \quad \text{Eq. 1037.555-2}$$

Where:

$$v_{\text{ref}_i} = \left( \frac{k_a \cdot T_{i-1}}{r} - \left( A + B \cdot v_{\text{ref}_{i-1}} + C \cdot v_{\text{ref}_{i-1}}^2 \right) - F_{\text{brake}_{i-1}} \right) \cdot \frac{t_i - t_{i-1}}{M} + v_{\text{ref}_{i-1}} \quad \text{Eq. 1037.555-3}$$

$T$  = instantaneous measured torque at the transmission output shaft.

$F_{\text{brake}}$  = instantaneous brake force applied by the driver model to add force to slow down the vehicle.

$t$  = elapsed time in the driving schedule as measured by the dynamometer, in seconds.

(2) For each test, validate the measured transmission output shaft's speed with the corresponding reference values according to 40 CFR 1065.514(e). You may delete points when the vehicle is stopped. Perform the validation based on speed values at the transmission output shaft. For steady-state tests (55 mph and 65 mph cruise), apply cycle-validation criteria by treating the sampling periods from the two tests as a continuous sampling period. Perform this validation based on the following parameters:

TABLE 1 OF § 1037.555—STATISTICAL CRITERIA FOR VALIDATING DUTY CYCLES

Parameter	Speed control
Slope, $a_1$ .....	$0.950 \leq a_1 \leq 1.030$ .
Absolute value of intercept, $\sqrt{a_0}$ .	$\leq 2.0\%$ of maximum test speed.
Standard error of estimate, $SEE$ .	$\leq 5\%$ of maximum test speed.
Coefficient of determination, $r^2$ .	$\geq 0.970$ .

(f) Send a brake signal when throttle position is equal to zero and vehicle speed is greater than the reference vehicle speed from the test cycle. Set a delay before changing the brake state to prevent the brake signal from dithering, consistent with good engineering judgment.

(g) The driver model should be designed to follow the cycle as closely as possible and must meet the requirements of § 1037.510 for steady-state testing and 40 CFR 1066.430(e) for transient testing. The driver model should be designed so that the brake and throttle are not applied at the same time.

(h) Correct for the net energy change of the energy storage device as described in 40 CFR 1066.501.

(i) Follow the provisions of § 1037.510 to weight the cycle results and § 1037.615 to calculate improvement factors and benefits for advanced technologies for Phase 1 vehicles.

#### § 1037.560 Rear-axle efficiency test.

This section describes a procedure for mapping rear-axle efficiency.

(a) Prepare an axle assembly for testing as follows:

(1) Select a newly manufactured axle assembly housing.

(2) If you have a family of axle assemblies with different axle ratios, you may test multiple configurations using a common axle housing.

(3) Install the axle with an input shaft angle perpendicular to the axle.

(i) If the axle assembly has a locking differential, lock the main differential and test it with one electric motor on the input shaft and a second electric motor on the output side of the output shaft that has the speed-reduction gear attached to it.

(ii) If an axle assembly has an open differential, use an alternate method to lock the differential for testing.

(iii) For drive-through tandem-axle setups, lock the longitudinal and inter-wheel differentials.

(4) Add gear lubricant according to the axle manufacturer's instructions. Use gear lubricant meeting the specification for BASF Emgard FE 2986 as described in "Emgard® FE 75W-90 Fuel Efficient Synthetic Gear Lubricant" (incorporated by reference in § 1037.810). Use this gear lubricant for all axle operation under this section.

(5) Install equipment for measuring the bulk temperature of the gear lubricant in the oil sump or a similar location.

(6) Break in the axle assembly by warming it up until the gear lubricant is at least 85 °C, and then operating it for 77 minutes at an angular wheel speed of 246 rpm at each of three differential torque settings, 25%, 50%, and 75%, in sequence, where differential torque is expressed as a percentage of the axle manufacturer's torque rating. Maintain gear lubricant temperature at 90±5 °C throughout the warm-up period.

(7) Drain and refill the gear lubricant following the break-in procedure.

(b) Measure input and output speeds and torques as described in 40 CFR 1065.210(b). Calibrate and verify measurement instruments according to 40 CFR part 1065, subpart C. Record all data, including bulk oil temperature, at a minimum of 256 Hz.

(c) The test matrix consists of torque and wheel speed values meeting the following specifications:

(1) Input torque values range from 1,000 to 4,000 N·m in 1,000 N·m increments; also include a test point with an output torque of 0 N·m.

(2) Determine maximum wheel speed corresponding to a vehicle speed of 65 mph based on the smallest tire that will be used with the axle. Use wheel speeds for testing that include maximum wheel speed, 50 rpm, and intermediate speeds in 100-rpm increments up to maximum wheel speed (150, 250, etc.). You may omit the last 100-rpm increment if it is within 10 rpm of the maximum wheel speed, and instead test at maximum wheel speed for the last test point.

(3) The average of measured values corresponding to each separate torque-measurement point must be within ±1 N·m of the setpoint for input torque, and within ±1 rpm of the setpoint for output speed.

(d) Determine rear-axle efficiency using the following procedure:

(1) Maintain ambient temperature between (20 and 30) °C throughout testing. Measure ambient temperature within 1.0 m of the axle assembly.

(2) Maintain gear lubricant temperature at 82±1 °C. You may use external heating and cooling as needed.

(3) Warm up the axle by operating it at maximum wheel speed and at zero output torque until the gear lubricant is within the specified temperature range.

(4) Continue operating at maximum wheel speed and zero output torque for at least 300 seconds, then measure the input torque, output torque, and wheel speed for at least 300 seconds, recording the average values for all three parameters. Repeat this stabilization and measurement sequence sequentially for higher torque setpoints from the test

matrix while holding wheel speed constant. Repeat the stabilization and measurement sequence at the same wheel speed from highest to lowest torque. This results in two measurements at each torque setting. Perform the stabilization and measurement sequence again in a sequence from low to high torque values, then from high to low torque values, all at the same wheel speed, resulting in four measurements at each torque setting. Calculate an arithmetic

average value for input torque, output torque, and wheel speed at each torque setting.

(5) Decrease wheel speed to the next lower speed setting and repeat the torque sweep described in paragraph (d)(4) of this section to determine input torque, output torque, and wheel speed results for all the torque settings at the new wheel speed. Repeat this process in order of decreasing wheel speed until the mapping is complete for all points in the test matrix. If the test is aborted

before completing the map, invalidate all the measurements made at that wheel speed. Once the problem has been resolved, warm up the axle as described in paragraph (d)(3) of this section and continue with measurements from the wheel speed where you stopped testing.

(e) Calculate the torque loss,  $T_{\text{loss}}$ , at each point from the test matrix using the following equation:

$$T_{\text{loss}} = T_{\text{in}} \cdot k_a - T_{\text{out}} \quad \text{Eq. 1037.560-1}$$

Where:

$T_{\text{in}}$  = input torque.

$k_a$  = drive axle ratio, expressed to at least the nearest 0.001.

$T_{\text{out}}$  = the output torque.

*Example:*

$T_{\text{in}} = 1000.0 \text{ N}\cdot\text{m}$

$k_a = 3.731$

$T_{\text{out}} = 3695.1 \text{ N}\cdot\text{m}$

$T_{\text{loss}} = 1000.0 \cdot 3.731 - 3695.1 = 35.9 \text{ N}\cdot\text{m}$

### Subpart G—Special Compliance Provisions

#### § 1037.601 General compliance provisions.

(a) Engine and vehicle manufacturers, as well as owners and operators of vehicles subject to the requirements of this part, and all other persons, must observe the provisions of this part, the provisions of 40 CFR part 1068, and the provisions of the Clean Air Act. The provisions of 40 CFR part 1068 apply for heavy-duty vehicles as specified in that part, subject to the following provisions:

(1) Except as specifically allowed by this part or 40 CFR part 1068, it is a violation of § 1068.101(a)(1) to introduce into U.S. commerce a tractor or vocational vehicle containing an engine not certified to the requirements of this part and 40 CFR part 86 corresponding to the calendar year for date of manufacture of the tractor or vocational vehicle. Similarly, it is a violation to introduce into U.S. commerce a Phase 1 tractor containing an engine not certified for use in tractors; or to introduce into U.S. commerce a vocational vehicle containing a light heavy-duty or medium heavy-duty engine not certified for use in vocational vehicles. These prohibitions apply especially to the vehicle manufacturer. Note that this paragraph (a)(1) allows the use of Class 8 tractor engines in vocational vehicles.

(2) The provisions of 40 CFR 1068.105(a) apply for vehicle manufacturers installing engines certified under 40 CFR part 1036 as

further limited by this paragraph (a)(2). If new engine emission standards apply in a given model year, you may install engines built before the date of the new or changed standards under the provisions of 40 CFR 1068.105(a) through March 31 of that year without our approval; you may not install such engines after March 31 of that year unless we approve it in advance. Installing such engines after March 31 without our prior approval is considered to be prohibited stockpiling of engines. In a written request for our approval, you must describe how your circumstances led you and your engine supplier to have normal inventories of engines that were not used up in the specified time frame. We will approve your request for up to three additional months to install up to 50 engines under this paragraph (a)(2) if we determine that the excess inventory is a result of unforeseeable circumstances and should not be considered circumvention of emission standards.

(3) The provisions of 40 CFR 1068.235 that allow for modifying certified vehicles and engines for competition do not apply for heavy-duty vehicles or heavy-duty engines. Certified motor vehicles and motor vehicle engines and their emission control devices must remain in their certified configuration even if they are used solely for competition or if they become nonroad vehicles or engines; anyone modifying a certified motor vehicle or motor vehicle engine for any reason is subject to the tampering and defeat device prohibitions of 40 CFR 1068.101(b) and 42 U.S.C. 7522(a)(3). Note that a new vehicle that will be used solely for competition may be excluded from the requirements of this part based on a determination that the vehicle is not a motor vehicle under 40 CFR 85.1703.

(4) The tampering prohibition in 40 CFR 1068.101(b)(1) applies for

alternative fuel conversions as specified in 40 CFR part 85, subpart F.

(5) The warranty-related prohibitions in section 203(a)(4) of the Act (42 U.S.C. 7522(a)(4)) apply to manufacturers of new heavy-duty highway vehicles in addition to the prohibitions described in 40 CFR 1068.101(b)(6). We may assess a civil penalty up to \$37,500 for each engine or vehicle in violation.

(6) The hardship exemption provisions of 40 CFR 1068.245, 1068.250, and 1068.255 do not apply for heavy-duty vehicles.

(7) A vehicle manufacturer that completes assembly of a vehicle at two or more facilities may ask to use as the date of manufacture for that vehicle the date on which manufacturing is completed at the place of main assembly, consistent with provisions of 49 CFR 567.4. Note that such staged assembly is subject to the corresponding provisions of 40 CFR 1068.260. Include your request in your application for certification, along with a summary of your staged-assembly process. You may ask to apply this allowance to some or all of the vehicles in your vehicle family. Our approval is effective when we grant your certificate. We will not approve your request if we determine that you intend to use this allowance to circumvent the intent of this part.

(8) The provisions for selective enforcement audits apply as described in 40 CFR part 1068, subpart E, and § 1037.301.

(b) Vehicles exempted from the applicable standards of 40 CFR part 86 are exempt from the standards of this part without request. Similarly, vehicles are exempt without request if the installed engine is exempted from the applicable standards in 40 CFR part 86.

(c) The prohibitions of 40 CFR 1068.101 apply for vehicles subject to the requirements of this part. The actions prohibited under this provision include the introduction into U.S.

commerce of a complete or incomplete vehicle subject to the standards of this part where the vehicle is not covered by a valid certificate of conformity or exemption.

(d) The emergency vehicle field modification provisions of 40 CFR 85.1716 apply with respect to the standards of this part.

(e) Under § 1037.801, certain vehicles are considered to be new vehicles when they are imported into the United States, even if they have previously been used outside the country. Independent Commercial Importers may use the provisions of 40 CFR part 85, subpart P, and 40 CFR 85.1706(b) to receive a certificate of conformity for engines and vehicles meeting all the requirements of 40 CFR part 1036 and this part 1037.

(f) Standards apply to multi-fuel vehicles as described for engines in 40 CFR 1036.601(d).

#### **§ 1037.605 Installing engines certified to alternate standards for specialty vehicles.**

(a) *General provisions.* This section allows vehicle manufacturers to introduce into U.S. commerce certain new motor vehicles if the engines are certified to alternate emission standards that are equivalent to standards that apply for nonroad engines under 40 CFR part 1039 or 1048. See 40 CFR 86.007–11(g) and 40 CFR 86.008–10(g). The provisions of this section apply for the following types of vehicles:

(1) Vehicles with a hybrid powertrain in which the engine provides energy for the Rechargeable Energy Storage System.

(2) Amphibious vehicles.

(3) Vehicles with maximum speed at or below 45 miles per hour. If your vehicle is speed-limited to meet this specification by reducing maximum speed below what is otherwise possible, this speed limitation must be programmed into the engine or vehicle's electronic control module in a way that is tamper-proof. If your vehicles are not inherently limited to a maximum speed at or below 45 miles per hour, they may qualify under this paragraph (a)(3) only if we approve your design to limit maximum speed as being tamper-proof in advance.

(b) *Notification and reporting requirements.* Send the Designated Compliance Officer written notification describing your plans before using the provisions of this section. In addition, by February 28 of each calendar year (or less often if we tell you), send the Designated Compliance Officer a report with all the following information:

(1) Identify your full corporate name, address, and telephone number.

(2) List the vehicle and engine models for which you used this exemption in the previous year and identify the total number of vehicles.

(c) *Production limits.* You may produce up to 1,000 hybrid vehicles, up to 200 amphibious vehicles, and up to 200 speed-limited vehicles under this section in a given model year. This includes vehicles produced by affiliated companies. If you exceed this limit, the exemption is void for the number of vehicles that exceed the limit for the model year. For the purpose of this paragraph (c), we will include all vehicles labeled or otherwise identified as exempt under this section.

(d) *Vehicle standards.* Hybrid vehicles using the provisions of this section remain subject to all other requirements of this part 1037. For example, you must use GEM in conjunction with powertrain testing to demonstrate compliance with emission standards under subpart B of this part. Vehicles qualifying under paragraph (a)(2) or (a)(3) of this section are exempt from the requirements of this part, except as specified in this section; these vehicles must include a label as specified in § 1037.135(a) with the information from § 1037.135(c)(1) and (2) and the following statement: "THIS [amphibious vehicle or speed-limited vehicle] IS EXEMPT FROM GREENHOUSE GAS STANDARDS UNDER 40 CFR 1037.605."

#### **§ 1037.610 Vehicles with off-cycle technologies.**

(a) You may ask us to apply the provisions of this section for CO<sub>2</sub> emission reductions resulting from vehicle technologies that were not in common use with heavy-duty vehicles before model year 2010 that are not reflected in GEM. These may be described as off-cycle or innovative technologies. These provisions may be applied for CO<sub>2</sub> emission reductions reflected using the specified test procedures, provided they are not reflected in GEM. We will apply these provisions only for technologies that will result in measurable, demonstrable, and verifiable real-world CO<sub>2</sub> emission reductions. This section does not apply for trailers.

(b) The provisions of this section may be applied as either an improvement factor or as a separate credit within the vehicle family, consistent with good engineering judgment. Note that the term "credit" in this section describes an additive adjustment to emission rates and is not equivalent to an emission credit in the ABT program of subpart H of this part. We recommend that you base your credit/adjustment on A to B

testing of pairs of vehicles differing only with respect to the technology in question.

(1) Calculate improvement factors as the ratio of in-use emissions with the technology divided by the in-use emissions without the technology. Use the improvement-factor approach where good engineering judgment indicates that the actual benefit will be proportional to emissions measured over the test procedures specified in this part.

(2) Calculate separate credits (g/ton-mile) based on the difference between the in-use emission rate with the technology and the in-use emission rate without the technology. Subtract this value from your GEM result and use this adjusted value to determine your FEL. Use the separate-credit approach where good engineering judgment indicates that the actual benefit will be not be proportional to emissions measured over the test procedures specified in this part.

(3) We may require you to discount or otherwise adjust your improvement factor or credit to account for uncertainty or other relevant factors.

(c) You may perform A to B testing by measuring emissions from the vehicles during chassis testing or from in-use on-road testing. We recommend that you perform on-road testing according to SAE J1321, Fuel Consumption Test Procedure—Type II, revised February 2012, or SAE J1526, Joint TMC/SAE Fuel Consumption In-Service Test Procedure Type III, Issued June 1987 (see § 1037.810 for information on availability of SAE standards), subject to the following provisions:

(1) The minimum route distance is 100 miles.

(2) The route selected must be representative in terms of grade. We will take into account published and relevant research in determining whether the grade is representative.

(3) Control vehicle speed over the route to be representative of the drive-cycle weighting adopted for each regulatory subcategory, as specified in § 1037.510(c), or apply a correction to account for the appropriate weighting. For example, if the route selected for an evaluation of a combination tractor with a sleeper cab contains only interstate driving at 65 mph, the improvement factor would apply only to 86 percent of the weighted result.

(4) The ambient air temperature must be between (5 and 35) °C, unless the technology requires other temperatures for demonstration.

(5) We may allow you to use a Portable Emissions Measurement System (PEMS) device for measuring

CO<sub>2</sub> emissions during the on-road testing.

(d) Send your request to the Designated Compliance Officer. We recommend that you do not begin collecting test data (for submission to EPA) before contacting us. For technologies for which the engine manufacturer could also claim credits (such as transmissions in certain circumstances), we may require you to include a letter from the engine manufacturer stating that it will not seek credits for the same technology. Your request must contain the following items:

(1) A detailed description of the off-cycle technology and how it functions to reduce CO<sub>2</sub> emissions under conditions not represented on the duty cycles required for certification.

(2) A list of the vehicle configurations that will be equipped with the technology.

(3) A detailed description and justification of the selected test vehicles.

(4) All testing and simulation data required under this section, plus any other data you have considered in your analysis. You may ask for our preliminary approval of your test plan under § 1037.210.

(5) A complete description of the methodology used to estimate the off-cycle benefit of the technology and all supporting data, including vehicle testing and in-use activity data. Also include a statement regarding your recommendation for applying the provisions of this section for the given technology as an improvement factor or a credit.

(6) An estimate of the off-cycle benefit by vehicle model, and the fleetwide benefit based on projected sales of vehicle models equipped with the technology.

(7) A demonstration of the in-use durability of the off-cycle technology, based on any available engineering analysis or durability testing data (either by testing components or whole vehicles).

(8) A recommended method for auditing production vehicles consistent with the intent of 40 CFR part 1068, subpart E. We may approve your recommended method or specify a different method.

(e) We may seek public comment on your request, consistent with the provisions of 40 CFR 86.1866. However, we will generally not seek public comment on credits or adjustments based on A to B chassis testing performed according to the duty-cycle testing requirements of this part or in-use testing performed according to paragraph (c) of this section.

(f) We may approve an improvement factor or credit for any vehicle family that is properly represented by your testing. You may similarly continue to use an approved improvement factor or credit for any appropriate vehicle families in future model years through 2020. Starting in model year 2021, you must request our approval before applying an improvement factor or credit under this section for any kind of technology, even if we approved an improvement factor or credit for similar vehicle models before model year 2021.

#### **§ 1037.615 Hybrid vehicles and other advanced technologies.**

(a) This section applies for Phase 1 hybrid vehicles with regenerative braking, vehicles equipped with Rankine-cycle engines, electric vehicles, and fuel cell vehicles. You may not generate credits for engine features for which the engines generate credits under 40 CFR part 1036. Note that Phase 2 and later hybrid vehicles may be powertrain tested under § 1037.550 to demonstrate the performance of hybrid powertrains.

(b) Generate advanced technology emission credits for hybrid vehicles that include regenerative braking (or the equivalent) and energy storage systems, fuel cell vehicles, and vehicles equipped with Rankine-cycle engines as follows:

(1) Measure the effectiveness of the advanced system by chassis testing a vehicle equipped with the advanced system and an equivalent conventional vehicle, or by testing the hybrid systems and the equivalent non-hybrid systems as described in § 1037.555. Test the vehicles as specified in subpart F of this part. For purposes of this paragraph (b), a conventional vehicle is considered to be equivalent if it has the same footprint (as defined in 40 CFR 86.1803), vehicle service class, aerodynamic drag, and other relevant factors not directly related to the hybrid powertrain. If you use § 1037.540 to quantify the benefits of a hybrid system for PTO operation, the conventional vehicle must have the same number of PTO circuits and have equivalent PTO power. If you do not produce an equivalent vehicle, you may create and test a prototype equivalent vehicle. The conventional vehicle is considered Vehicle A and the advanced vehicle is considered Vehicle B. We may specify an alternate cycle if your vehicle includes a power take-off.

(2) Calculate an improvement factor and g/ton-mile benefit using the following equations and parameters:

(i) Improvement Factor = [(Emission Rate A) – (Emission Rate B)]/(Emission Rate A).

(ii) g/ton-mile benefit = Improvement Factor × (GEM Result B).

(iii) Emission Rates A and B are the g/ton-mile CO<sub>2</sub> emission rates of the conventional and advanced vehicles, respectively, as measured under the test procedures specified in this section. GEM Result B is the g/ton-mile CO<sub>2</sub> emission rate resulting from emission modeling of the advanced vehicle as specified in § 1037.520.

(3) If you apply an improvement factor to multiple vehicle configurations using the same advanced technology, use the vehicle configuration with the smallest potential reduction in greenhouse gas emissions resulting from the hybrid capability.

(4) Use the equations of § 1037.705 to convert the g/ton-mile benefit to emission credits (in Mg). Use the g/ton-mile benefit in place of the (Std-FEL) term.

(c) See § 1037.540 for special testing provisions related to vehicles equipped with hybrid power take-off units.

(d) You may use an engineering analysis to calculate an improvement factor for fuel cell vehicles based on measured emissions from the fuel cell vehicle.

(e) For electric vehicles, calculate CO<sub>2</sub> credits using an FEL of 0 g/ton-mile.

(f) As specified in subpart H of this part, credits generated under this section may be used under this part 1037 outside of the averaging set in which they were generated or used under 40 CFR part 1036.

(g) You may certify using both provisions of this section and the off-cycle technology provisions of § 1037.610, provided you do not double count emission benefits.

#### **§ 1037.620 Responsibilities for multiple manufacturers.**

This section describes certain circumstances in which multiple manufacturers share responsibilities for vehicle they produce together. This section does limit responsibilities that apply under the Act or these regulations for anyone meeting the definition of “manufacturer” in § 1037.801.

(a) The delegated assembly provisions of § 1037.621 apply for certifying manufacturers that rely on other manufacturers to finish assembly in a certified configuration. The provisions of § 1037.622 apply for manufacturers that ship vehicles subject to the requirements of this part to a certifying secondary vehicle manufacturer. The provisions of § 1037.622 also apply to the secondary manufacturer.

(b) Manufacturers of aerodynamic devices may perform the aerodynamic testing described in § 1037.525 to

quantify  $C_{DA}$  values for trailers and submit that data to EPA verification under § 1037.211. Trailer manufacturers may use such verified data to establish modeling inputs for certifying their trailers. Both device manufacturers and trailer manufacturers are subject to the recall provisions described in 40 CFR part 1068, subpart F.

(c) Tire manufacturers must comply with the provisions of § 1037.650.

#### **§ 1037.621 Delegated assembly.**

(a) This section describes an exemption that allows certificate holders to sell or ship vehicles that are missing certain emission-related components if those components will be installed by a secondary vehicle manufacturer. (**Note:** See § 1037.622 for provisions related to manufacturers introducing into U.S. commerce partially complete vehicles for which a secondary vehicle manufacturer holds the certificate of conformity.) This exemption is temporary as described in 40 CFR 1068(f).

(b) The provisions of 40 CFR 1068.261 apply for vehicles subject to GHG standards under this part, with the following exceptions and clarifications:

(1) Understand references to “engines” to refer to vehicles.

(2) Understand references to “aftertreatment components” to refer to any emission-related components needed for complying with GHG standards under this part.

(3) Understand “equipment manufacturers” to be secondary vehicle manufacturers.

(4) The provisions of 40 CFR 1068.261(b), (c)(7), (d), and (e) do not apply. Accordingly, the provisions of 40 CFR 1068.261(c) apply regardless of pricing arrangements.

#### **§ 1037.622 Shipment of incomplete vehicles to secondary vehicle manufacturers.**

This section specifies how manufacturers may introduce partially complete vehicles into U.S. commerce. The provisions of this section do not apply for trailers, except in unusual circumstances. You may not use the provisions of this section to circumvent the intent of this part.

(a) The provisions of this section allow manufacturers to ship partially complete vehicles to secondary vehicle manufacturers or otherwise introduce them into U.S. commerce in the following circumstances:

(1) *Tractors.* Manufacturers may introduce partially complete tractors into U.S. commerce if they are covered by a certificate of conformity for tractors and will be in their certified tractor

configuration before they reach the ultimate purchasers. For example, this would apply for sleepers initially shipped without the sleeper compartments attached. Note that delegated assembly provisions may apply (see § 1037.621).

(2) *Small businesses modifying certified tractors.* Small businesses that build custom sleeper cabs may modify complete or incomplete vehicles certified as tractors, as long as they do not increase the effective frontal area of the certified configuration.

(3) *Vocational vehicles.* Manufacturers may introduce partially complete vocational vehicles into U.S. commerce if they are covered by a certificate of conformity for vocational vehicles and will be in their certified vocational configuration before they reach the ultimate purchasers. Note that delegated assembly provisions may apply (see § 1037.621).

(4) *Uncertified vehicles that will be certified by secondary vehicle manufacturers.* Manufacturers may introduce into U.S. commerce partially complete vehicles for which they do not hold a certificate of conformity only as allowed by paragraph (b) of this section; however, the requirements of this section do not apply for tractors or vocational vehicles built before January 1, 2022, that are produced by a secondary vehicle manufacturer if they are excluded from the standards of this part under § 1037.150(c).

(b) The provisions of this paragraph (b) generally apply where the secondary vehicle manufacturer has substantial control over the design and assembly of emission controls. In unusual circumstances we may allow other secondary vehicle manufacturers to use these provisions. In determining whether a manufacturer has substantial control over the design and assembly of emission controls, we would consider the degree to which the secondary manufacturer would be able to ensure that the engine and vehicle will conform to the regulations in their final configurations.

(1) A secondary manufacturer may finish assembly of partially complete vehicles in the following cases:

(i) It obtains a vehicle that is not fully assembled with the intent to manufacture a complete vehicle in a certified configuration.

(ii) It obtains a vehicle with the intent to modify it to a certified configuration before it reaches the ultimate purchaser. For example, this may apply for converting a gasoline-fueled vehicle to operate on natural gas under the terms of a valid certificate.

(2) Manufacturers may introduce partially complete vehicles into U.S. commerce as described in this paragraph (b) if they have a written request for such vehicles from a secondary vehicle manufacturer that will finish the vehicle assembly and has certified the vehicle (or the vehicle has been exempted or excluded from the requirements of this part). The written request must include a statement that the secondary manufacturer has a certificate of conformity (or exemption/exclusion) for the vehicle and identify a valid vehicle family name associated with each vehicle model ordered (or the basis for an exemption/exclusion). The original vehicle manufacturer must apply a removable label meeting the requirements of 40 CFR 1068.45 that identifies the corporate name of the original manufacturer and states that the vehicle is exempt under the provisions of § 1037.622. The name of the certifying manufacturer must also be on the label or, alternatively, on the bill of lading that accompanies the vehicles during shipment. The original manufacturer may not apply a permanent emission control information label identifying the vehicle's eventual status as a certified vehicle.

(3) If you are the secondary manufacturer and you will hold the certificate, you must include the following information in your application for certification:

(i) Identify the original manufacturer of the partially complete vehicle or of the complete vehicle you will modify.

(ii) Describe briefly how and where final assembly will be completed. Specify how you have the ability to ensure that the vehicles will conform to the regulations in their final configuration. (**Note:** This section prohibits using the provisions of this paragraph (b) unless you have substantial control over the design and assembly of emission controls.)

(iii) State unconditionally that you will not distribute the vehicles without conforming to all applicable regulations.

(4) If you are a secondary manufacturer and you are already a certificate holder for other families, you may receive shipment of partially complete vehicles after you apply for a certificate of conformity but before the certificate's effective date. This exemption allows the original manufacturer to ship vehicles after you have applied for a certificate of conformity. Manufacturers may introduce partially complete vehicles into U.S. commerce as described in this paragraph (b)(4) if they have a written request for such vehicles from a secondary manufacturer stating that the

application for certification has been submitted (instead of the information we specify in paragraph (b)(2) of this section). We may set additional conditions under this paragraph (b)(4) to prevent circumvention of regulatory requirements.

(5) The provisions of this section also apply for shipping partially complete vehicles if the vehicle is covered by a valid exemption and there is no valid family name that could be used to represent the vehicle model. Unless we approve otherwise in advance, you may do this only when shipping engines to secondary manufacturers that are certificate holders. In this case, the secondary manufacturer must identify the regulatory cite identifying the applicable exemption instead of a valid family name when ordering engines from the original vehicle manufacturer.

(6) Both original and secondary manufacturers must keep the records described in this section for at least five years, including the written request for exempted vehicles and the bill of lading for each shipment (if applicable). The written request is deemed to be a submission to EPA.

(7) These provisions are intended only to allow secondary manufacturers to obtain or transport vehicles in the specific circumstances identified in this section so any exemption under this section expires when the vehicle reaches the point of final assembly identified in paragraph (b)(3)(ii) of this section.

(8) For purposes of this section, an allowance to introduce partially complete vehicles into U.S. commerce includes a conditional allowance to sell, introduce, or deliver such vehicles into commerce in the United States or import them into the United States. It does not include a general allowance to offer such vehicles for sale because this exemption is intended to apply only for cases in which the certificate holder already has an arrangement to purchase the vehicles from the original manufacturer. This exemption does not allow the original manufacturer to subsequently offer the vehicles for sale to a different manufacturer who will hold the certificate unless that second manufacturer has also complied with the requirements of this part. The exemption does not apply for any individual vehicles that are not labeled as specified in this section or which are shipped to someone who is not a certificate holder.

(9) We may suspend, revoke, or void an exemption under this section, as follows:

(i) We may suspend or revoke your exemption if you fail to meet the

requirements of this section. We may suspend or revoke an exemption related to a specific secondary manufacturer if that manufacturer sells vehicles that are in not in a certified configuration in violation of the regulations. We may disallow this exemption for future shipments to the affected secondary manufacturer or set additional conditions to ensure that vehicles will be assembled in the certified configuration.

(ii) We may void an exemption for all the affected vehicles if you intentionally submit false or incomplete information or fail to keep and provide to EPA the records required by this section.

(iii) The exemption is void for a vehicle that is shipped to a company that is not a certificate holder or for a vehicle that is shipped to a secondary manufacturer that is not in compliance with the requirements of this section.

(iv) The secondary manufacturer may be liable for penalties for causing a prohibited act where the exemption is voided due to actions on the part of the secondary manufacturer.

(c) Provide instructions along with partially complete vehicles including all information necessary to ensure that an engine will be installed in its certified configuration.

#### **§ 1037.630 Special purpose tractors.**

(a) *General provisions.* This section allows a vehicle manufacturer to reclassify certain tractors as vocational tractors. Vocational tractors are treated as vocational vehicles and are exempt from the standards of § 1037.106. Note that references to “tractors” outside of this section mean non-vocational tractors.

(1) This allowance is intended only for vehicles that do not typically operate at highway speeds, or would otherwise not benefit from efficiency improvements designed for line-haul tractors. This allowance is limited to the following vehicle and application types:

(i) Low-roof tractors intended for intra-city pickup and delivery, such as those that deliver bottled beverages to retail stores.

(ii) Tractors intended for off-road operation (including mixed service operation), such as those with reinforced frames and increased ground clearance.

(iii) Model year 2020 and earlier tractors with a gross combination weight rating (GCWR) over 120,000 pounds. Note that tractors meeting the definition of “heavy-haul” in § 1037.801 may be certified to the heavy-haul standards in § 1037.106.

(2) Where we determine that a manufacturer is not applying this

allowance in good faith, we may require the manufacturer to obtain preliminary approval before using this allowance.

(b) *Requirements.* The following requirements apply with respect to tractors reclassified under this section:

(1) The vehicle must fully conform to all requirements applicable to vocational vehicles under this part.

(2) Vehicles reclassified under this section must be certified as a separate vehicle family. However, they remain part of the vocational regulatory subcategory and averaging set that applies for their weight class.

(3) You must include the following additional statement on the vehicle's emission control information label under § 1037.135: “THIS VEHICLE WAS CERTIFIED AS A VOCATIONAL TRACTOR UNDER 40 CFR 1037.630.”

(4) You must keep records for three years to document your basis for believing the vehicles will be used as described in paragraph (a)(1) of this section. Include in your application for certification a brief description of your basis.

(c) *Production limit.* No manufacturer may produce more than 21,000 vehicles under this section in any consecutive three model year period. This means you may not exceed 6,000 in a given model year if the combined total for the previous two years was 15,000. The production limit applies with respect to all Class 7 and Class 8 tractors certified or exempted as vocational tractors. Note that in most cases, the provisions of paragraph (a) of this section will limit the allowable number of vehicles to be a number lower than the production limit of this paragraph (c).

(d) *Off-road exemption.* All the provisions of this section apply for vocational tractors exempted under § 1037.631, except as follows:

(1) The vehicles are required to comply with the requirements of § 1037.631 instead of the requirements that would otherwise apply to vocational vehicles. Vehicles complying with the requirements of § 1037.631 and using an engine certified to the standards of 40 CFR part 1036 are deemed to fully conform to all requirements applicable to vocational vehicles under this part.

(2) The vehicles must be labeled as specified under § 1037.631 instead of as specified in paragraph (b)(3) of this section.

#### **§ 1037.631 Exemption for vocational vehicles intended for off-road use.**

This section provides an exemption from the greenhouse gas standards of this part for certain vocational vehicles intended to be used extensively in off-



road environments such as forests, oil fields, and construction sites. This section does not exempt engines used in vocational vehicles from the standards of 40 CFR part 86 or part 1036. Note that you may not include these exempted vehicles in any credit calculations under this part. Note also that trailers designed specifically for off-road use are generally excluded from the requirements of this part under § 1037.5.

(a) *Qualifying criteria.* Vocational vehicles intended for off-road use are exempt without request, subject to the provisions of this section, if they are primarily designed to perform work off-road (such as in oil fields, mining, forests, or construction sites), and they meet at least one of the criteria of paragraph (a)(1) of this section and at least one of the criteria of paragraph (a)(2) of this section.

(1) The vehicle must have affixed components designed to work in an off-road environment (*i.e.*, hazardous material equipment or off-road drill equipment) or be designed to operate at low speeds such that it is unsuitable for normal highway operation.

(2) The vehicle must meet one of the following criteria:

(i) Have an axle that has a gross axle weight rating (GAWR) at or above 29,000 pounds.

(ii) Have a speed attainable in 2.0 miles of not more than 33 mph.

(iii) Have a speed attainable in 2.0 miles of not more than 45 mph, an unloaded vehicle weight that is not less than 95 percent of its gross vehicle weight rating, and no capacity to carry occupants other than the driver and operating crew.

(b) *Tractors.* The provisions of this section may apply for tractors only if each tractor qualifies as a vocational tractor under § 1037.630.

(c) *Recordkeeping and reporting.* (1) You must keep records to document that your exempted vehicle configurations meet all applicable requirements of this section. Keep these records for at least eight years after you stop producing the exempted vehicle model. We may review these records at any time.

(2) You must also keep records of the individual exempted vehicles you produce, including the vehicle identification number and a description of the vehicle configuration.

(3) Within 90 days after the end of each model year, you must send to the Designated Compliance Officer a report with the following information:

(i) A description of each exempted vehicle configuration, including an explanation of why it qualifies for this exemption.

(ii) The number of vehicles exempted for each vehicle configuration.

(d) *Labeling.* You must include the following additional statement on the vehicle's emission control information label under § 1037.135: "THIS VEHICLE WAS EXEMPTED UNDER 40 CFR 1037.631."

#### § 1037.635 Glider kits.

Section 1037.601(a)(1) generally disallows the introduction into U.S. commerce of a new tractor or vocational vehicle (including a vehicle assembled from a glider kit) unless it has an engine that is certified to the standards that apply for the engine model year corresponding to the vehicle's date of manufacture. For example, for a vehicle with a 2020 date of manufacture, the engine must meet the standards that apply for model year 2020. Note that the engine may be from an earlier model year if the standards were identical. This section describes an exemption from the certification requirement that applies for qualifying manufacturers. Note that the Clean Air Act definition of "manufacturer" includes anyone who assembles motor vehicles, including entities that install engines in or otherwise complete assembly of glider kits.

(a) Vehicles conforming to the requirements in paragraphs (b) through (g) of this section are exempt from the emission standards of this part. Engines in such vehicles remain subject to the requirements of 40 CFR part 86 applicable for the engines' original model year, but are exempt from the standards of 40 CFR part 1036.

(b) You are eligible for an exemption under this section if you are a small manufacturer and you sold vehicles in 2014 under the provisions of § 1037.150(j). You must notify us of your plans to use this exemption before you introduce exempt vehicles into U.S. commerce. In your notification, you must identify your annual sales of such vehicles for calendar years 2010 through 2014. Vehicles you produce before notifying us, are not exempt under this section.

(c) In a given calendar year, you may sell up to 300 exempt vehicles under this section, or up to the highest annual sales volume you identify in paragraph (b) of this section, whichever is less.

(d) Identify the number of exempt vehicles you sold under this section for the prior calendar year in your annual report under § 1037.250.

(e) Include the following statement on the label required under § 1037.135: "THIS VEHICLE AND ITS ENGINE ARE EXEMPT UNDER 40 CFR 1037.635."

(f) This exemption is valid for a given vehicle only if you meet all the requirements and conditions of this section that apply with respect to that vehicle. Introducing such a vehicle into U.S. commerce without meeting all applicable requirements and conditions violates 40 CFR 1068.101(a)(1).

(g) Companies that are not small manufacturers may sell uncertified incomplete vehicles without engines to small manufacturers for the purpose of producing exempt vehicles under this section, subject to the provisions of § 1037.622.

#### § 1037.640 Variable vehicle speed limiters.

This section specifies provisions that apply for vehicle speed limiters (VSLs) that you model under § 1037.520. This does not apply for VSLs that you do not model under § 1037.520.

(a) *General.* The regulations of this part do not constrain how you may design VSLs for your vehicles. For example, you may design your VSL to have a single fixed speed limit or a soft-top speed limit. You may also design your VSL to expire after accumulation of a predetermined number of miles. However, designs with soft tops or expiration features are subject to proration provisions under this section that do not apply to fixed VSLs that do not expire.

(b) *Definitions.* The following definitions apply for purposes of this section:

(1) Default speed limit means the speed limit that normally applies for the vehicle, except as follows:

(i) The default speed limit for adjustable VSLs must represent the speed limit that applies when the VSL is adjusted to its highest setting under paragraph (c) of this section.

(ii) For VSLs with soft tops, the default speed does not include speeds possible only during soft-top operation.

(iii) For expiring VSLs, the default does not include speeds that are possible only after expiration.

(2) Soft-top speed limit means the highest speed limit that applies during soft-top operation.

(3) Maximum soft-top duration means the maximum amount of time that a vehicle could operate above the default speed limit.

(4) Certified VSL means a VSL configuration that applies when a vehicle is new and until it expires.

(5) Expiration point means the mileage at which a vehicle's certified VSL expires (or the point at which tamper protections expire).

(6) Effective speed limit has the meaning given in paragraph (d) of this section.



(c) *Adjustments.* You may design your VSL to be adjustable; however, this may affect the value you use in GEM.

(1) Except as specified in paragraph (c)(2) of this section, any adjustments that can be made to the engine, vehicle, or their controls that change the VSL's actual speed limit are considered to be adjustable operating parameters. Compliance is based on the vehicle being adjusted to the highest speed limit within this range.

(2) The following adjustments are not adjustable parameters:

(i) Adjustments made only to account for changing tire size or final drive ratio.

(ii) Adjustments protected by encrypted controls or passwords.

(iii) Adjustments possible only after the VSL's expiration point.

(d) *Effective speed limit.* (1) For VSLs without soft tops or expiration points that expire before 1,259,000 miles, the effective speed limit is the highest speed limit that results by adjusting the VSL or other vehicle parameters consistent with the provisions of paragraph (c) of this section.

(2) For VSLs with soft tops and/or expiration points, the effective speed limit is calculated as specified in this paragraph (d)(2), which is based on 10 hours of operation per day (394 miles per day for day cabs and 551 miles per day for sleeper cabs). Note that this calculation assumes that a fraction of this operation is speed limited (3.9 hours and 252 miles for day cabs, and 7.3 hours and 474 miles for sleeper cabs). Use the following equation to calculate the effective speed limit, rounded to the nearest 0.1 mph:

$$\text{Effective speed} = \text{ExF} \cdot [\text{STF} \cdot \text{STSL} + (1 - \text{STF}) \cdot \text{DSL}] + (1 - \text{ExF}) \cdot 65 \text{ mph}$$

Where:

ExF = expiration point miles/1,259,000 miles.

STF = the maximum number of allowable soft top operation hours per day/3.9 hours for day cabs (or maximum miles per day/252), or the maximum number of allowable soft top operation hours per day/7.3 hours for sleeper cabs (or maximum miles per day/474).

STSL = the soft top speed limit.

DSL = the default speed limit.

#### **§ 1037.645 In-use compliance with family emission limits (FELs).**

Section 1037.225 describes how to change the FEL for a vehicle family during the model year. This section, which describes how you may ask us to increase a vehicle family's FEL after the end of the model year, is intended to address circumstances in which it is in the public interest to apply a higher in-use FEL based on forfeiting an appropriate number of emission credits.

(a) You may ask us to increase a vehicle family's FEL after the end of the model year if you believe some of your in-use vehicles exceed the CO<sub>2</sub> FEL that applied during the model year (or the CO<sub>2</sub> emission standard if the family did not generate or use emission credits). We may consider any available information in making our decision to approve or deny your request.

(b) If we approve your request under this section, you must apply emission credits to cover the increased FEL for all affected vehicles. Apply the emission credits as part of your credit demonstration for the current production year. Include the appropriate calculations in your final report under § 1037.730.

(c) Submit your request to the Designated Compliance Officer. Include the following in your request:

(1) Identify the names of each vehicle family that is the subject of your request. Include separate family names for different model years.

(2) Describe why your request does not apply for similar vehicle models or additional model years, as applicable.

(3) Identify the FEL that applied during the model year for each configuration and recommend replacement FELs for in-use vehicles; include a supporting rationale to describe how you determined the recommended replacement FELs.

(4) Describe whether the needed emission credits will come from averaging, banking, or trading.

(d) If we approve your request, we will identify one or more replacement FELs, as follows:

(1) Where your vehicle family includes more than one sub-family with different FELs, we may apply a higher FEL within the family than was applied to the vehicle's configuration in your final ABT report. For example, if your vehicle family included three sub-families, with FELs of 200 g/ton-mile, 210 g/ton-mile, and 220 g/ton-mile, we may apply a 220 g/ton-mile in-use FEL to vehicles that were originally designated as part of the 200 g/ton-mile or 210 g/ton-mile sub-families.

(2) Without regard to the number of sub-families in your certified vehicle family, we may specify one or more new sub-families with higher FELs than you included in your final ABT report. We may apply these higher FELs as in-use FELs for your vehicles. For example, if your vehicle family included three sub-families, with FELs of 200 g/ton-mile, 210 g/ton-mile, and 220 g/ton-mile, we may specify a new 230 g/ton-mile sub-family.

(3) Our selected values for the replacement FEL will reflect our best

judgment to accurately reflect the actual in-use performance of your vehicles, consistent with the testing provisions specified in this part.

(4) We may apply the higher FELs to other vehicle families from the same or different model years to the extent they used equivalent emission controls. We may include any appropriate conditions with our approval.

(e) If we order a recall for a vehicle family under 40 CFR 1068.505, we will no longer approve a replacement FEL under this section for any of your vehicles from that vehicle family, or from any other vehicle family that relies on equivalent emission controls.

#### **§ 1037.650 Tire manufacturers.**

This section describes how the requirements of this part apply with respect to tire manufacturers that choose to provide test data or emission warranties for purposes of this part.

(a) *Testing.* You are responsible as follows for test tires and emission test results that you provide to vehicle manufacturers for the purpose of the manufacturer submitting them to EPA for certification under this part:

(1) Such test results are deemed under § 1037.825 to be submissions to EPA. This means that you may be subject to criminal penalties under 18 U.S.C. 1001 if you knowingly submit false test results to the manufacturer.

(2) You may not cause a vehicle manufacturer to violate the regulations by rendering inaccurate emission test results you provide (or emission test results from testing of test tires you provide) to the vehicle manufacturer.

(3) Your provision of test tires and emission test results to vehicle manufacturers for the purpose of certifying under this part is deemed to be an agreement to provide tires to EPA for confirmatory testing under § 1037.201.

(b) *Warranty.* You may contractually agree to process emission warranty claims on behalf of the manufacturer certifying the vehicle with respect to tires you produce.

(1) Your fulfillment of the warranty requirements of this part is deemed to fulfill the vehicle manufacturer's warranty obligations under this part with respect to tires you warrant.

(2) You may not cause a vehicle manufacturer to violate the regulations by failing to fulfill the emission warranty requirements that you contractually agreed to fulfill.

#### **§ 1037.655 Post-useful life vehicle modifications.**

This section specifies vehicle modifications that may occur in certain

circumstances after a vehicle reaches the end of its regulatory useful life. It does not apply with respect to modifications that occur within the useful life period. It also does not apply with respect to engine modifications or recalibrations. Note that many such modifications to the vehicle during the useful life and to the engine at any time are presumed to violate 42 U.S.C. 7522(a)(3)(A).

(a) *General.* Except as allowed by this section, it is prohibited for any person to remove or render inoperative any emission control device installed to comply with the requirements of this part 1037.

(b) *Allowable modifications.* You may modify a vehicle for the purpose of reducing emissions, provided you have a reasonable technical basis for knowing that such modification will not increase emissions of any other pollutant. Reasonable technical basis has the meaning given in 40 CFR 1068.30. This generally requires you to have information that would lead an engineer or other person familiar with engine and vehicle design and function to reasonably believe that the modifications will not increase emissions of any regulated pollutant.

(c) *Examples of allowable modifications.* The following are examples of allowable modifications:

(1) It is generally allowable to remove tractor roof fairings after the end of the vehicle's useful life if the vehicle will no longer be used primarily to pull box trailers.

(2) Other fairings may be removed after the end of the vehicle's useful life if the vehicle will no longer be used significantly on highways with vehicle speed of 55 miles per hour or higher.

(d) *Examples of prohibited modifications.* The following are examples of modifications that are not allowable:

(1) No person may disable a vehicle speed limiter prior to its expiration point.

(2) No person may remove aerodynamic fairings from tractors that are used primarily to pull box trailers on highways.

#### **§ 1037.660 Automatic engine shutdown systems.**

This section specifies requirements that apply for certified automatic engine shutdown (AES) systems modeled under § 1037.520. It does not apply for AES systems you do not model under § 1037.520.

(a) *Minimum requirements.* Your AES system must meet all of the requirements of this paragraph (a) to be modeled under § 1037.520. The system

must shut down the engine within 300 seconds when all the following conditions are met:

(1) The transmission is set in neutral with the parking brake engaged (or the transmission is set to park if so equipped).

(2) The operator has not reset the system timer within the 300 seconds by changing the position of the accelerator, brake, or clutch pedal; or by some other mechanism we approve.

(3) None of the override conditions of paragraph (b) of this section are met.

(b) *Override conditions.* The system may delay shutting the engine down while any of the conditions of this paragraph (b) apply. Engines equipped with auto restart may restart during override conditions. Note that these conditions allow the system to delay shutdown or restart, but do not allow it to reset the timer. The system may delay shutdown—

(1) While an exhaust emission control device is regenerating. The period considered to be regeneration for purposes of this allowance must be consistent with good engineering judgment and may differ in length from the period considered to be regeneration for other purposes. For example, in some cases it may be appropriate to include a cool down period for this purpose but not for infrequent regeneration adjustment factors.

(2) If necessary while servicing the vehicle, provided the deactivation of the AES system is accomplished using a diagnostic scan tool. The system must be automatically reactivated when the engine is shutdown for more than 60 minutes.

(3) If the vehicle's main battery state-of-charge is not sufficient to allow the main engine to be restarted.

(4) If the external ambient temperature reaches a level below which or above which the cabin temperature cannot be maintained within reasonable heat or cold exposure threshold limit values for the health and safety of the operator (not merely comfort).

(5) If the vehicle's engine coolant temperature is too low according to the manufacturer's engine protection guidance. This may also apply for fuel or oil temperatures. This allows the engine to continue operating until it reaches a predefined temperature at which the shutdown sequence of paragraph (a) of this section would resume.

(6) The system may delay shutdown while the vehicle's main engine is operating in power take-off (PTO) mode. For purposes of this paragraph (b)(6), an engine is considered to be in PTO mode

when a switch or setting designating PTO mode is enabled.

(c) *Adjustments to AES systems.* (1) The AES system may include an expiration point (in miles) after which the AES system may be disabled. If your vehicle is equipped with an AES system that expires before 1,259,000 miles, adjust the model input as follows, rounded to the nearest 0.1 g/ton-mile: AES Input = 5 g CO<sub>2</sub>/ton-mile × (miles at expiration/1,259,000 miles).

(2) For AES systems designed to limit idling to a specific number of hours less than 1,800 hours over any 12-month period, calculate an adjusted AES input using the following equation, rounded to the nearest 0.1 g/ton-mile: AES Input = 5 g CO<sub>2</sub>/ton-mile × (1 – (maximum allowable number of idling hours per year/1,800 hours)). This is an annual allowance that starts when the vehicle is new and resets every 12 months after that. Manufacturers may propose an alternative method based on operating hours or miles instead of years.

(d) *Adjustable parameters.* Provisions that apply generally with respect to adjustable parameters also apply to the AES system operating parameters, except the following are not considered to be adjustable parameters:

(1) Accelerator, brake, and clutch pedals, with respect to resetting the idle timer. Parameters associated with other timer reset mechanisms we approve are also not adjustable parameters.

(2) Bypass parameters allowed for vehicle service under paragraph (b)(2) of this section.

(3) Parameters that are adjustable only after the expiration point.

#### **§ 1037.665 In-use tractor testing.**

Manufacturers with U.S.-directed production volumes of greater than 20,000 tractors must perform in-use testing as described in this section.

(a) The following test requirements apply beginning in model year 2021:

(1) Each year, select for testing three sleeper cabs and two day cabs certified to Phase 1 or Phase 2 standards. If we do not identify certain vehicle configurations for your testing, select models that you project to be among your 12 highest-selling vehicle configurations for the given year.

(2) Set up the tractors on a chassis dynamometer and operate them over all applicable duty cycles from § 1037.510(a). You may use emission-measurement systems meeting the specifications of 40 CFR part 1065, subpart J. Calculate coefficients for the road-load force equation as described in Section 10 of SAE J1263 or Section 11 of SAE J2263 (both incorporated by reference in § 1037.810). Use standard

payload. Measure emissions of NO<sub>x</sub>, PM, CO, NMHC, CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O. Determine emission levels in g/hour for the idle test and g/ton-mile for other duty cycles.

(b) Send us an annual report with your test results for each duty cycle and the corresponding GEM results. We may make your test data publicly available.

### Subpart H—Averaging, Banking, and Trading for Certification

#### § 1037.701 General provisions.

(a) You may average, bank, and trade emission credits for purposes of certification as described in this subpart and in subpart B of this part to show compliance with the standards of §§ 1037.105 through 1037.107. Participation in this program is voluntary.

(b) The definitions of Subpart I of this part apply to this subpart. The following definitions also apply:

(1) *Actual emission credits* means emission credits you have generated that we have verified by reviewing your final report.

(2) *Averaging set* means a set of vehicles in which emission credits may be exchanged. Credits generated by one vehicle may only be used by other vehicles in the same averaging set. Note that an averaging set may comprise more than one regulatory subcategory. See § 1037.740.

(3) *Broker* means any entity that facilitates a trade of emission credits between a buyer and seller.

(4) *Buyer* means the entity that receives emission credits as a result of a trade.

(5) *Reserved emission credits* means emission credits you have generated that we have not yet verified by reviewing your final report.

(6) *Seller* means the entity that provides emission credits during a trade.

(7) *Standard* means the emission standard that applies under subpart B of this part for vehicles not participating in the ABT program of this subpart.

(8) *Trade* means to exchange emission credits, either as a buyer or seller.

(c) Emission credits may be exchanged only within an averaging set as specified in § 1037.740.

(d) You may not use emission credits generated under this subpart to offset any emissions that exceed an FEL or standard, except as allowed by § 1037.645.

(e) You may use either of the following approaches to retire or forego emission credits:

(1) You may trade emission credits generated from any number of your

vehicles to the vehicle purchasers or other parties to retire the credits. Identify any such credits in the reports described in § 1037.730. Vehicles must comply with the applicable FELs even if you donate or sell the corresponding emission credits under this paragraph (e). Those credits may no longer be used by anyone to demonstrate compliance with any EPA emission standards.

(2) You may certify a family using an FEL below the emission standard as described in this part and choose not to generate emission credits for that family. If you do this, you do not need to calculate emission credits for those families and you do not need to submit or keep the associated records described in this subpart for that family.

(f) Emission credits may be used in the model year they are generated. Surplus emission credits may be banked for future model years. Surplus emission credits may sometimes be used for past model years, as described in § 1037.745.

(g) You may increase or decrease an FEL during the model year by amending your application for certification under § 1037.225. The new FEL may apply only to vehicles you have not already introduced into commerce.

(h) See § 1037.740 for special credit provisions that apply for credits generated under § 1037.104(d)(7), § 1037.615 or 40 CFR 1036.615.

(i) Unless the regulations explicitly allow it, you may not calculate credits more than once for any emission reduction. For example, if you generate CO<sub>2</sub> emission credits for a given hybrid vehicle under this part, no one may generate CO<sub>2</sub> emission credits for the hybrid engine under 40 CFR part 1036. However, credits could be generated for identical engine used in vehicles that did not generate credits under this part.

(j) You may use emission credits generated under the Phase 1 standards when certifying vehicles to Phase 2 standards. No credit adjustments are required other than corrections for different useful lives.

#### § 1037.705 Generating and calculating emission credits.

(a) The provisions of this section apply separately for calculating emission credits for each pollutant.

(b) For each participating family or subfamily, calculate positive or negative emission credits relative to the otherwise applicable emission standard. Calculate positive emission credits for a family or subfamily that has an FEL below the standard. Calculate negative emission credits for a family or subfamily that has an FEL above the standard. Sum your positive and

negative credits for the model year before rounding. Round the sum of emission credits to the nearest megagram (Mg), using consistent units with the following equation:

$$\text{Emission credits (Mg)} = (\text{Std} - \text{FEL}) \cdot (\text{PL}) \cdot (\text{Volume}) \cdot (\text{UL}) \cdot (10^{-6})$$

Where:

*Std* = the emission standard associated with the specific regulatory subcategory (g/ton-mile).

*FEL* = the family emission limit for the vehicle subfamily (g/ton-mile).

*PL* = standard payload, in tons.

*Volume* = U.S.-directed production volume of the vehicle subfamily. For example, if you produce three configurations with the same FEL, the subfamily production volume would be the sum of the production volumes for these three configurations.

*UL* = useful life of the vehicle, in miles, as described in § 1037.105 and § 1037.106. Use 250,000 miles for trailers.

(c) As described in § 1037.730, compliance with the requirements of this subpart is determined at the end of the model year based on actual U.S.-directed production volumes. Keep appropriate records to document these production volumes. Do not include any of the following vehicles to calculate emission credits:

(1) Vehicles that you do not certify to the CO<sub>2</sub> standards of this part because they are permanently exempted under subpart G of this part or under 40 CFR part 1068.

(2) Exported vehicles.

(3) Vehicles not subject to the requirements of this part, such as those excluded under § 1037.5.

(4) Any other vehicles, where we indicate elsewhere in this part 1037 that they are not to be included in the calculations of this subpart.

#### § 1037.710 Averaging.

(a) Averaging is the exchange of emission credits among your vehicle families. You may average emission credits only within the same averaging set.

(b) You may certify one or more vehicle families (or subfamilies) to an FEL above the applicable standard, subject to any applicable FEL caps and other provisions in subpart B of this part, if you show in your application for certification that your projected balance of all emission-credit transactions in that model year is greater than or equal to zero or that a negative balance is allowed under § 1037.745.

(c) If you certify a vehicle family to an FEL that exceeds the otherwise applicable standard, you must obtain enough emission credits to offset the vehicle family's deficit by the due date

for the final report required in § 1037.730. The emission credits used to address the deficit may come from your other vehicle families that generate emission credits in the same model year (or from later model years as specified in § 1037.745), from emission credits you have banked from previous model years, or from emission credits generated in the same or previous model years that you obtained through trading. Note that the option for using banked or traded credits does not apply for trailers.

#### **§ 1037.715 Banking.**

(a) Banking is the retention of surplus emission credits by the manufacturer generating the emission credits for use in future model years for averaging or trading. Note that § 1037.107 does not allow banking for trailers.

(b) You may designate any emission credits you plan to bank in the reports you submit under § 1037.730 as reserved credits. During the model year and before the due date for the final report, you may designate your reserved emission credits for averaging or trading.

(c) Reserved credits become actual emission credits when you submit your final report. However, we may revoke these emission credits if we are unable to verify them after reviewing your reports or auditing your records.

(d) Banked credits retain the designation of the averaging set in which they were generated.

#### **§ 1037.720 Trading.**

(a) Trading is the exchange of emission credits between manufacturers, or the transfer of credits to another party to retire them. You may use traded emission credits for averaging, banking, or further trading transactions. Traded emission credits remain subject to the averaging-set restrictions based on the averaging set in which they were generated. Note that § 1037.107 does not allow trading for trailers.

(b) You may trade actual emission credits as described in this subpart. You may also trade reserved emission credits, but we may revoke these emission credits based on our review of your records or reports or those of the company with which you traded emission credits. You may trade banked credits within an averaging set to any certifying manufacturer.

(c) If a negative emission credit balance results from a transaction, both the buyer and seller are liable, except in cases we deem to involve fraud. See § 1037.255(e) for cases involving fraud. We may void the certificates of all

vehicle families participating in a trade that results in a manufacturer having a negative balance of emission credits. See § 1037.745.

#### **§ 1037.725 What must I include in my application for certification?**

(a) You must declare in your application for certification your intent to use the provisions of this subpart for each vehicle family that will be certified using the ABT program. You must also declare the FELs you select for the vehicle family or subfamily for each pollutant for which you are using the ABT program. Your FELs must comply with the specifications of subpart B of this part, including the FEL caps. FELs must be expressed to the same number of decimal places as the applicable standards.

(b) Include the following in your application for certification:

(1) A statement that, to the best of your belief, you will not have a negative balance of emission credits for any averaging set when all emission credits are calculated at the end of the year; or a statement that you will have a negative balance of emission credits for one or more averaging sets but that it is allowed under § 1037.745.

(2) Calculations of projected emission credits (positive or negative) based on projected U.S.-directed production volumes. We may require you to include similar calculations from your other vehicle families to project your net credit balances for the model year. If you project negative emission credits for a family or subfamily, state the source of positive emission credits you expect to use to offset the negative emission credits.

#### **§ 1037.730 ABT reports.**

(a) If any of your vehicle families are certified using the ABT provisions of this subpart, you must send a final report by March 31 following the end of the model year. You may ask us to extend the deadline for the final report to April 30.

(b) Your final report must include the following information for each vehicle family participating in the ABT program:

(1) Vehicle-family and subfamily designations, and averaging set.

(2) The regulatory subcategory and emission standards that would otherwise apply to the vehicle family.

(3) The FEL for each pollutant. If you change the FEL after the start of production, identify the date that you started using the new FEL and/or give the vehicle identification number for the first vehicle covered by the new FEL. In this case, identify each applicable FEL

and calculate the positive or negative emission credits as specified in § 1037.225.

(4) The projected and actual U.S.-directed production volumes for the model year. If you changed an FEL during the model year, identify the actual U.S.-directed production volume associated with each FEL.

(5) Useful life.

(6) Calculated positive or negative emission credits for the whole vehicle family. Identify any emission credits that you traded, as described in paragraph (d)(1) of this section.

(7) If you have a negative credit balance for the averaging set in the given model year, specify whether the vehicle family (or certain subfamilies with the vehicle family) have a credit deficit for the year. Consider for example, a manufacturer with three vehicle families (“A”, “B”, and “C”) in a given averaging set. If family A generates enough credits to offset the negative credits of family B but not enough to also offset the negative credits of family C (and the manufacturer has no banked credits in the averaging set), the manufacturer may designate families A and B as having no deficit for the model year, provided it designates family C as having a deficit for the model year.

(c) Your final report must include the following additional information:

(1) Show that your net balance of emission credits from all your participating vehicle families in each averaging set in the applicable model year is not negative, except as allowed under § 1037.745. Your credit tracking must account for the limitation on credit life under § 1037.40(c).

(2) State whether you will retain any emission credits for banking. If you choose to retire emission credits that would otherwise be eligible for banking, identify the families that generated the emission credits, including the number of emission credits from each family.

(3) State that the report’s contents are accurate.

(4) Identify the technologies that make up the certified configuration associated with each vehicle identification number. You may identify this as a range of identification numbers for vehicles involving a single, identical certified configuration.

(d) If you trade emission credits, you must send us a report within 90 days after the transaction, as follows:

(1) As the seller, you must include the following information in your report:

(i) The corporate names of the buyer and any brokers.

(ii) A copy of any contracts related to the trade.

(iii) The vehicle families that generated emission credits for the trade, including the number of emission credits from each family.

(2) As the buyer, you must include the following information in your report:

(i) The corporate names of the seller and any brokers.

(ii) A copy of any contracts related to the trade.

(iii) How you intend to use the emission credits, including the number of emission credits you intend to apply to each vehicle family (if known).

(e) Send your reports electronically to the Designated Compliance Officer using an approved information format. If you want to use a different format, send us a written request with justification for a waiver.

(f) Correct errors in your final report as follows:

(1) If you or we determine before the due date for the final report that errors mistakenly decreased your balance of emission credits, you may correct the errors and recalculate the balance of emission credits. You may not make these corrections for errors that are determined after the due date for the final report. If you report a negative balance of emission credits, we may disallow corrections under this paragraph (f)(1).

(2) If you or we determine anytime that errors mistakenly increased your balance of emission credits, you must correct the errors and recalculate the balance of emission credits.

#### **§ 1037.735 Recordkeeping.**

(a) You must organize and maintain your records as described in this section.

(b) Keep the records required by this section for at least eight years after the due date for the final report. You may not use emission credits for any vehicles if you do not keep all the records required under this section. You must therefore keep these records to continue to bank valid credits.

(c) Keep a copy of the reports we require in §§ 1037.725 and 1037.730.

(d) Keep records of the vehicle identification number for each vehicle you produce. You may identify these numbers as a range. If you change the FEL after the start of production, identify the date you started using each FEL and the range of vehicle identification numbers associated with each FEL. You must also identify the purchaser and destination for each vehicle you produce to the extent this information is available.

(e) We may require you to keep additional records or to send us relevant information not required by this section in accordance with the Clean Air Act.

#### **§ 1037.740 Restrictions for using emission credits.**

The following restrictions apply for using emission credits:

(a) *Averaging sets.* Except as specified in paragraph (b) of this section, emission credits may be exchanged only within an averaging set. The following principal averaging sets apply for vehicles subject to this subpart:

(1) Class 2b through 5 vehicles that are subject to the standards of § 1037.105.

(2) Class 6 and 7 vehicles.

(3) Class 8 vehicles.

(4) Long box van trailers.

(5) Short box van trailers.

(6) Long refrigerated box van trailers.

(7) Short refrigerated box van trailers.

(8) Note that other separate averaging sets also apply for emission credits not related to this part. For example, vehicles certified to the greenhouse gas standards of 40 CFR 86.1819 comprise a single averaging set. Separate averaging sets also apply for engines under 40 CFR part 1036, including engines used in vehicles subject to this subpart.

(b) *Credits from hybrid vehicles and other advanced technologies.* Credits you generate under § 1037.615 in Phase 1 may be used for any of the averaging sets identified in paragraph (a) of this section; you may also use those credits to demonstrate compliance with the CO<sub>2</sub> emission standards in 40 CFR 86.1819 and 40 CFR part 1036. Similarly, you may use advanced-technology credits generated under 40 CFR 86.1819–14(k)(7) or 40 CFR 1036.615 to demonstrate compliance with the CO<sub>2</sub> standards in this part.

(1) The maximum amount of credits you may bring into the following service class groups is 60,000 Mg per model year:

(i) Spark-ignition engines, light heavy-duty compression-ignition engines, and light heavy-duty vehicles. This group comprises the averaging set listed in paragraphs (a)(1) of this section and the averaging set listed in 40 CFR 1036.740(a)(1) and (2).

(ii) Medium heavy-duty compression-ignition engines and medium heavy-duty vehicles. This group comprises the averaging sets listed in paragraph (a)(2) of this section and 40 CFR 1036.740(a)(3).

(iii) Heavy heavy-duty compression-ignition engines and heavy heavy-duty vehicles. This group comprises the averaging sets listed in paragraph (a)(3) of this section and 40 CFR 1036.740(a)(4).

(2) Paragraph (b)(1) of this section does not limit the advanced technology credits that can be used within a service

class group if they were generated in that same service class group.

(c) *Credit life.* Banked credits may be used only for five model years after the year in which they are generated. For example, credits you generate in model year 2018 may be used to demonstrate compliance with emission standards only through model year 2023.

(d) *Other restrictions.* Other sections of this part specify additional restrictions for using emission credits under certain special provisions.

#### **§ 1037.745 End-of-year CO<sub>2</sub> credit deficits.**

Except as allowed by this section, we may void the certificate of any vehicle family certified to an FEL above the applicable standard for which you do not have sufficient credits by the deadline for submitting the final report.

(a) Your certificate for a vehicle family for which you do not have sufficient CO<sub>2</sub> credits will not be void if you remedy the deficit with surplus credits within three model years (this applies equally for tractors, trailers, and vocational vehicles). For example, if you have a credit deficit of 500 Mg for a vehicle family at the end of model year 2015, you must generate (or otherwise obtain) a surplus of at least 500 Mg in that same averaging set by the end of model year 2018.

(b) You may not bank or trade away CO<sub>2</sub> credits in the averaging set in any model year in which you have a deficit.

(c) You may apply only surplus credits to your deficit. You may not apply credits to a deficit from an earlier model year if they were generated in a model year for which any of your vehicle families for that averaging set had an end-of-year credit deficit.

(d) If you do not remedy the deficit with surplus credits within three model years, we may void your certificate for that vehicle family. Note that voiding a certificate applies *ab initio*. Where the net deficit is less than the total amount of negative credits originally generated by the family, we will void the certificate only with respect to the number of vehicles needed to reach the amount of the net deficit. For example, if the original vehicle family generated 500 Mg of negative credits, and the manufacturer's net deficit after three years was 250 Mg, we would void the certificate with respect to half of the vehicles in the family.

(e) For purposes of calculating the statute of limitations, the following actions are all considered to occur at the expiration of the deadline for offsetting a deficit as specified in paragraph (a) of this section:

(1) Failing to meet the requirements of paragraph (a) of this section.

(2) Failing to satisfy the conditions upon which a certificate was issued relative to offsetting a deficit.

(3) Selling, offering for sale, introducing or delivering into U.S. commerce, or importing vehicles that are found not to be covered by a certificate as a result of failing to offset a deficit.

**§ 1037.750 What can happen if I do not comply with the provisions of this subpart?**

(a) For each vehicle family participating in the ABT program, the certificate of conformity is conditioned upon full compliance with the provisions of this subpart during and after the model year. You are responsible to establish to our satisfaction that you fully comply with applicable requirements. We may void the certificate of conformity for a vehicle family if you fail to comply with any provisions of this subpart.

(b) You may certify your vehicle family or subfamily to an FEL above an applicable standard based on a projection that you will have enough emission credits to offset the deficit for the vehicle family. See § 1037.745 for provisions specifying what happens if you cannot show in your final report that you have enough actual emission credits to offset a deficit for any pollutant in a vehicle family.

(c) We may void the certificate of conformity for a vehicle family if you fail to keep records, send reports, or give us information we request. Note that failing to keep records, send reports, or give us information we request is also a violation of 42 U.S.C. 7522(a)(2).

(d) You may ask for a hearing if we void your certificate under this section (see § 1037.820).

**§ 1037.755 Information provided to the Department of Transportation.**

After receipt of each manufacturer's final report as specified in § 1037.730 and completion of any verification testing required to validate the manufacturer's submitted final data, we will issue a report to the Department of Transportation with CO<sub>2</sub> emission information and will verify the accuracy of each manufacturer's equivalent fuel consumption data required by NHTSA under 49 CFR 535.8. We will send a report to DOT for each vehicle manufacturer based on each regulatory category and subcategory, including sufficient information for NHTSA to determine fuel consumption and associated credit values. See 49 CFR 535.8 to determine if NHTSA deems submission of this information to EPA to also be a submission to NHTSA.

**Subpart I—Definitions and Other Reference Information**

**§ 1037.801 Definitions.**

The following definitions apply to this part. The definitions apply to all subparts unless we note otherwise. All undefined terms have the meaning the Act gives to them. The definitions follow:

*Act* means the Clean Air Act, as amended, 42 U.S.C. 7401–7671q.

*Adjustable parameter* means any device, system, or element of design that someone can adjust (including those which are difficult to access) and that, if adjusted, may affect measured or modeled emissions (as applicable). You may ask us to exclude a parameter that is difficult to access if it cannot be adjusted to affect emissions without significantly degrading vehicle performance, or if you otherwise show us that it will not be adjusted in a way that affects emissions during in-use operation.

*Adjusted Loaded Vehicle Weight* means the numerical average of vehicle curb weight and GVWR.

*Advanced technology* means vehicle technology certified under 40 CFR 86.1819–14(k)(7), 40 CFR 1036.615, or § 1037.615.

*Aftertreatment* means relating to a catalytic converter, particulate filter, or any other system, component, or technology mounted downstream of the exhaust valve (or exhaust port) whose design function is to decrease emissions in the vehicle exhaust before it is exhausted to the environment. Exhaust-gas recirculation (EGR) and turbochargers are not aftertreatment.

*Aircraft* means any vehicle capable of sustained air travel more than 100 feet off the ground.

*Alcohol-fueled vehicle* means a vehicle that is designed to run using an alcohol fuel. For purposes of this definition, alcohol fuels do not include fuels with a nominal alcohol content below 25 percent by volume.

*Alternative fuel conversion* has the meaning given for clean alternative fuel conversion in 40 CFR 85.502.

*Ambulance* has the meaning given in 40 CFR 86.1803.

*Amphibious vehicle* means a motor vehicle that is also designed for operation on water.

*A to B testing* means testing performed in pairs to allow comparison of two vehicles or other test articles. Back-to-back tests are performed on Article A and Article B, changing only the variable(s) of interest for the two tests.

*Automatic tire inflation system* means a system installed on a vehicle to keep

each tire inflated to within 10 percent of the target value with no operator input.

*Auxiliary emission control device* means any element of design that senses temperature, motive speed, engine rpm, transmission gear, or any other parameter for the purpose of activating, modulating, delaying, or deactivating the operation of any part of the emission control system.

*Averaging set* has the meaning given in § 1037.701.

*Axle ratio or Drive axle ratio,  $k_a$* , means the dimensionless number representing the angular speed of the transmission output shaft divided by the angular speed of the drive axle.

*Basic vehicle frontal area* means the area enclosed by the geometric projection of the basic vehicle along the longitudinal axis onto a plane perpendicular to the longitudinal axis of the vehicle, including tires but excluding mirrors and air deflectors.

*Calibration* means the set of specifications and tolerances specific to a particular design, version, or application of a component or assembly capable of functionally describing its operation over its working range.

*Carryover* means relating to certification based on emission data generated from an earlier model year.

*Certification* means relating to the process of obtaining a certificate of conformity for a vehicle family that complies with the emission standards and requirements in this part.

*Certified emission level* means the highest deteriorated emission level in a vehicle subfamily for a given pollutant from either transient or steady-state testing.

*Class* means relating to GVWR classes for vehicles other than trailers, as follows:

(1) *Class 2b* means heavy-duty motor vehicles at or below 10,000 pounds GVWR.

(2) *Class 3* means heavy-duty motor vehicles above 10,000 pounds GVWR but at or below 14,000 pounds GVWR.

(3) *Class 4* means heavy-duty motor vehicles above 14,000 pounds GVWR but at or below 16,000 pounds GVWR.

(4) *Class 5* means heavy-duty motor vehicles above 16,000 pounds GVWR but at or below 19,500 pounds GVWR.

(5) *Class 6* means heavy-duty motor vehicles above 19,500 pounds GVWR but at or below 26,000 pounds GVWR.

(6) *Class 7* means heavy-duty motor vehicles above 26,000 pounds GVWR but at or below 33,000 pounds GVWR.

(7) *Class 8* means heavy-duty motor vehicles above 33,000 pounds GVWR.

*Complete vehicle* has the meaning given in the definition of *vehicle* in this section.

*Compression-ignition* has the meaning given in § 1037.101.

*Date of manufacture* means the date on which the certifying vehicle manufacturer completes its manufacturing operations, except as follows:

(1) Where the certificate holder is an engine manufacturer that does not manufacture the chassis, the date of manufacture of the vehicle is based on the date assembly of the vehicle is completed.

(2) We may approve an alternate date of manufacture based on the date on which the certifying (or primary) manufacturer completes assembly at the place of main assembly, consistent with the provisions of § 1037.601 and 49 CFR 567.4.

*Day cab* means a type of tractor cab that is not a sleeper cab or a heavy-haul tractor cab.

*Designated Compliance Officer* means one of the following:

(1) For compression-ignition engines, *Designated Compliance Officer* means Director, Diesel Engine Compliance Center, U.S. Environmental Protection Agency, 2000 Traverwood Drive, Ann Arbor, MI 48105; [complianceinfo@epa.gov](mailto:complianceinfo@epa.gov); [epa.gov/otaq/verify](http://epa.gov/otaq/verify).

(2) For spark-ignition engines, *Designated Compliance Officer* means Director, Gasoline Engine Compliance Center, U.S. Environmental Protection Agency, 2000 Traverwood Drive, Ann Arbor, MI 48105; [nonroad-si-cert@epa.gov](mailto:nonroad-si-cert@epa.gov).

*Deteriorated emission level* means the emission level that results from applying the appropriate deterioration factor to the official emission result of the emission-data vehicle. Note that where no deterioration factor applies, references in this part to the *deteriorated emission level* mean the official emission result.

*Deterioration factor* means the relationship between the highest emissions during the useful life and emissions at the low-hour test point, expressed in one of the following ways:

(1) For multiplicative deterioration factors, the ratio of the highest emissions to emissions at the low-hour test point.

(2) For additive deterioration factors, the difference between the highest emissions and emissions at the low-hour test point.

*Driver model* means an automated controller that simulates a person driving a vehicle.

*Dual-fuel* means relating to a vehicle or engine designed for operation on two different fuels but not on a continuous mixture of those fuels. For purposes of this part, such a vehicle or engine

remains a dual-fuel vehicle or engine even if it is designed for operation on three or more different fuels.

*Electric vehicle* means a vehicle that does not include an engine, and is powered solely by an external source of electricity and/or solar power. Note that this does not include electric hybrid or fuel-cell vehicles that use a chemical fuel such as gasoline, diesel fuel, or hydrogen. Electric vehicles may also be referred to as all-electric vehicles to distinguish them from hybrid vehicles.

*Emergency vehicle* means a vehicle that is an ambulance or a fire truck.

*Emission control system* means any device, system, or element of design that controls or reduces the emissions of regulated pollutants from a vehicle.

*Emission-data component* means a vehicle component that is tested for certification. This includes vehicle components tested to establish deterioration factors.

*Emission-data vehicle* means a vehicle (or vehicle component) that is tested for certification. This includes vehicles tested to establish deterioration factors.

*Emission-related maintenance* means maintenance that substantially affects emissions or is likely to substantially affect emission deterioration.

*Excluded* means relating to vehicles that are not subject to some or all of the requirements of this part as follows:

(1) A vehicle that has been determined not to be a "motor vehicle" is excluded from this part.

(2) Certain vehicles are excluded from the requirements of this part under § 1037.5.

(3) Specific regulatory provisions of this part may exclude a vehicle generally subject to this part from one or more specific standards or requirements of this part.

*Exempted* has the meaning given in 40 CFR 1068.30.

*Family emission limit (FEL)* means an emission level declared by the manufacturer to serve in place of an otherwise applicable emission standard under the ABT program in subpart H of this part. The family emission limit must be expressed to the same number of decimal places as the emission standard it replaces. Note that an FEL may apply as a "subfamily" emission limit.

*Final drive ratio,  $k_d$* , means the dimensionless number representing the angular speed of the transmission input shaft divided by the angular speed of the drive axle when the vehicle is operating in its highest available gear. The final drive ratio is the transmission gear ratio (in the highest available gear) multiplied by the drive axle ratio.

*Fire truck* has the meaning given in 40 CFR 86.1803.

*Flexible-fuel* means relating to an engine designed for operation on any mixture of two or more different fuels.

*Fuel system* means all components involved in transporting, metering, and mixing the fuel from the fuel tank to the combustion chamber(s), including the fuel tank, fuel pump, fuel filters, fuel lines, carburetor or fuel-injection components, and all fuel-system vents. It also includes components for controlling evaporative emissions, such as fuel caps, purge valves, and carbon canisters.

*Fuel type* means a general category of fuels such as diesel fuel or natural gas. There can be multiple grades within a single fuel type, such as high-sulfur or low-sulfur diesel fuel.

*Gaseous fuel* means a fuel that has a boiling point below 20 °C.

*Gear ratio or Transmission gear ratio,  $k_g$* , means the dimensionless number representing the angular velocity of the transmission's input shaft divided by the angular velocity of the transmission's output shaft when the transmission is operating in a specific gear.

*Glider kit* means any of the following:

(1) A new vehicle that is incomplete because it lacks an engine, transmission, or axle.

(2) A new vehicle produced with a used engine (including a rebuilt or remanufactured engine).

(3) Any other new equipment that is intended to become a motor vehicle with a previously used engine (including a rebuilt or remanufactured engine).

*Glider vehicle* means a new vehicle produced with a used engine.

*Good engineering judgment* has the meaning given in 40 CFR 1068.30. See 40 CFR 1068.5 for the administrative process we use to evaluate good engineering judgment.

*Gross axle weight rating (GAWR)* means the value specified by the vehicle manufacturer as the maximum weight of a loaded axle or set of axles, consistent with good engineering judgment.

*Gross combination weight rating (GCWR)* means the value specified by the vehicle manufacturer as the maximum weight of a loaded vehicle and trailer, consistent with good engineering judgment. For example, compliance with SAE J2807 is generally considered to be consistent with good engineering judgment, especially for Class 3 and smaller vehicles.

*Gross vehicle weight rating (GVWR)* means the value specified by the vehicle manufacturer as the maximum design loaded weight of a single vehicle,



consistent with good engineering judgment.

*Heavy-duty engine* means any engine used for (or for which the engine manufacturer could reasonably expect to be used for) motive power in a heavy-duty vehicle.

*Heavy-duty vehicle* means any trailer and any other motor vehicle that has a GVWR above 8,500 pounds, a curb weight above 6,000 pounds, or a basic vehicle frontal area greater than 45 square feet.

*Heavy-haul tractor* means a tractor with GCWR above 120,000 pounds, a total gear reduction at or above 57, and a frame Resisting Bending Moment at or above 2,000,000 in-lbs per rail, or per rail and liner combination. Total gear reduction is the transmission gear ratio in the lowest gear multiplied by the drive axle ratio. A heavy-haul tractor is not a vocational tractor.

*Hybrid engine* or *hybrid powertrain* means an engine or powertrain that includes energy storage features other than a conventional battery system or conventional flywheel. Supplemental electrical batteries and hydraulic accumulators are examples of hybrid energy storage systems. Note that certain provisions in this part treat hybrid engines and powertrains intended for vehicles that include regenerative braking different than those intended for vehicles that do not include regenerative braking.

*Hybrid vehicle* means a vehicle that includes energy storage features (other than a conventional battery system or conventional flywheel) in addition to an internal combustion engine or other engine using consumable chemical fuel. Supplemental electrical batteries and hydraulic accumulators are examples of hybrid energy storage systems. Note that certain provisions in this part treat hybrid vehicles that include regenerative braking different than those that do not include regenerative braking.

*Hydrocarbon (HC)* means the hydrocarbon group on which the emission standards are based for each fuel type. For alcohol-fueled vehicles, HC means nonmethane hydrocarbon equivalent (NMHCE) for exhaust emissions and total hydrocarbon equivalent (THCE) for evaporative emissions. For all other vehicles, HC means nonmethane hydrocarbon (NMHC) for exhaust emissions and total hydrocarbon (THC) for evaporative emissions.

*Identification number* means a unique specification (for example, a model number/serial number combination) that allows someone to distinguish a particular vehicle from other similar vehicles.

*Incomplete vehicle* has the meaning given in the definition of *vehicle* in this section.

*Innovative technology* means technology certified under § 1037.610.

*Light-duty truck* means any motor vehicle rated at or below 8,500 pounds GVWR with a curb weight at or below 6,000 pounds and basic vehicle frontal area at or below 45 square feet, which is:

(1) Designed primarily for purposes of transportation of property or is a derivation of such a vehicle; or

(2) Designed primarily for transportation of persons and has a capacity of more than 12 persons; or

(3) Available with special features enabling off-street or off-highway operation and use.

*Light-duty vehicle* means a passenger car or passenger car derivative capable of seating 12 or fewer passengers.

*Low-mileage* means relating to a vehicle with stabilized emissions and represents the undeteriorated emission level. This would generally involve approximately 4000 miles of operation.

*Low rolling resistance tire* means a tire on a vocational vehicle with a TRRL at or below of 7.7 kg/metric ton, a steer tire on a tractor with a TRRL at or below 7.7 kg/metric ton, or a drive tire on a tractor with a TRRL at or below 8.1 kg/metric ton.

*Manufacture* means the physical and engineering process of designing, constructing, and/or assembling a vehicle.

*Manufacturer* has the meaning given in section 216(1) of the Act. In general, this term includes any person who manufactures or assembles a vehicle for sale in the United States or otherwise introduces a new motor vehicle into commerce in the United States. This includes importers who import vehicles or vehicles for resale and entities that assemble glider kits.

*Medium-duty passenger vehicle (MDPV)* has the meaning given in 40 CFR 86.1803.

*Model year* means the manufacturer's annual new model production period, except as restricted under this definition and 40 CFR part 85, subpart X. It must include January 1 of the calendar year for which the model year is named, may not begin before January 2 of the previous calendar year, and it must end by December 31 of the named calendar year.

(1) The manufacturer who holds the certificate of conformity for the vehicle must assign the model year based on the date when its manufacturing operations are completed relative to its annual model year period. In unusual circumstances where completion of

your assembly is delayed, we may allow you to assign a model year one year earlier, provided it does not affect which regulatory requirements will apply.

(2) Unless a vehicle is being shipped to a secondary manufacturer that will hold the certificate of conformity, the model year must be assigned prior to introduction of the vehicle into U.S. commerce. The certifying manufacturer must redesignate the model year if it does not complete its manufacturing operations within the originally identified model year. A vehicle introduced into U.S. commerce without a model year is deemed to have a model year equal to the calendar year of its introduction into U.S. commerce unless the certifying manufacturer assigns a later date.

*Motor vehicle* has the meaning given in 40 CFR 85.1703.

*Multi-Purpose Duty Cycle* has the meaning given in § 1037.510.

*New motor vehicle* has the meaning given in the Act. It generally means a motor vehicle meeting the criteria of either paragraph (1) or (2) of this definition. *New motor vehicles* may be complete or incomplete.

(1) A motor vehicle for which the ultimate purchaser has never received the equitable or legal title is a *new motor vehicle*. This kind of vehicle might commonly be thought of as “brand new” although a *new motor vehicle* may include previously used parts. For example, vehicles commonly known as “glider kits” or “gliders” are new motor vehicles. Under this definition, the vehicle is new from the time it is produced until the ultimate purchaser receives the title or places it into service, whichever comes first.

(2) An imported heavy-duty motor vehicle originally produced after the 1969 model year is a *new motor vehicle*.

*Noncompliant vehicle* means a vehicle that was originally covered by a certificate of conformity, but is not in the certified configuration or otherwise does not comply with the conditions of the certificate.

*Nonconforming vehicle* means a vehicle not covered by a certificate of conformity that would otherwise be subject to emission standards.

*Nonmethane hydrocarbon (NMHC)* means the sum of all hydrocarbon species except methane, as measured according to 40 CFR part 1065.

*Nonmethane hydrocarbon equivalent* has the meaning given in 40 CFR 1065.1001.

*Off-cycle technology* means technology certified under § 1037.610.

*Official emission result* means the measured emission rate for an emission-



data vehicle on a given duty cycle before the application of any required deterioration factor, but after the applicability of regeneration adjustment factors.

*Owners manual* means a document or collection of documents prepared by the vehicle manufacturer for the owners or operators to describe appropriate vehicle maintenance, applicable warranties, and any other information related to operating or keeping the vehicle. The owners manual is typically provided to the ultimate purchaser at the time of sale.

*Oxides of nitrogen* has the meaning given in 40 CFR 1065.1001.

*Particulate trap* means a filtering device that is designed to physically trap all particulate matter above a certain size.

*Percent* has the meaning given in 40 CFR 1065.1001. Note that this means percentages identified in this part are assumed to be infinitely precise without regard to the number of significant figures. For example, one percent of 1,493 is 14.93.

*Phase 1* means relating to the Phase 1 standards specified in §§ 1037.105 and 1037.106. Note that there are no Phase 1 standards for trailers. For example, a vehicle subject to the Phase 1 standards is a Phase 1 vehicle.

*Phase 2* means relating to the Phase 2 standards specified in §§ 1037.105 through 1037.107.

*Placed into service* means put into initial use for its intended purpose, excluding incidental use by the manufacturer or a dealer.

*Power take-off (PTO)* means a secondary engine shaft (or equivalent) that provides substantial auxiliary power for purposes unrelated to vehicle propulsion or normal vehicle accessories such as air conditioning, power steering, and basic electrical accessories. A typical PTO uses a secondary shaft on the engine to transmit power to a hydraulic pump that powers auxiliary equipment, such as a boom on a bucket truck. You may ask us to consider other equivalent auxiliary power configurations (such as those with hybrid vehicles) as power take-off systems.

*Preliminary approval* means approval granted by an authorized EPA representative prior to submission of an application for certification, consistent with the provisions of § 1037.210.

*Rechargeable Energy Storage System (RESS)* means the component(s) of a hybrid engine or vehicle that store recovered energy for later use, such as the battery system in an electric hybrid vehicle.

*Regional Duty Cycle* has the meaning given in § 1037.510.

*Regulatory subcategory* has the meaning given in § 1037.230.

*Relating to* as used in this section means relating to something in a specific, direct manner. This expression is used in this section only to define terms as adjectives and not to broaden the meaning of the terms.

*Revoke* has the meaning given in 40 CFR 1068.30.

*Roof height* means the maximum height of a vehicle (rounded to the nearest inch), excluding narrow accessories such as exhaust pipes and antennas, but including any wide accessories such as roof fairings. Measure roof height of the vehicle configured to have its maximum height that will occur during actual use, with properly inflated tires and no driver, passengers, or cargo onboard. *Roof height* may also refer to the following categories:

(1) Low-roof means relating to a vehicle with a roof height of 120 inches or less.

(2) Mid-roof means relating to a vehicle with a roof height of 121 to 147 inches.

(3) High-roof means relating to a vehicle with a roof height of 148 inches or more.

*Round* has the meaning given in 40 CFR 1065.1001.

*Scheduled maintenance* means adjusting, repairing, removing, disassembling, cleaning, or replacing components or systems periodically to keep a part or system from failing, malfunctioning, or wearing prematurely. It also may mean actions you expect are necessary to correct an overt indication of failure or malfunction for which periodic maintenance is not appropriate.

*Secondary vehicle manufacturer* anyone that produces a vehicle by modifying a complete or partially complete vehicle. For the purpose of this definition, “modifying” does not include making changes that do not remove a vehicle from its original certified configuration. This definition applies whether the production involves a complete or partially complete vehicle and whether the vehicle was previously certified to emission standards or not. Manufacturers controlled by the manufacturer of the base vehicle (or by an entity that also controls the manufacturer of the base vehicle) are not secondary vehicle manufacturers; rather, both entities are considered to be one manufacturer for purposes of this part.

*Sleeper cab* means a type of tractor cab that has a compartment behind the

driver's seat intended to be used by the driver for sleeping, and is not a heavy-haul tractor cab. This includes cabs accessible from the driver's compartment and those accessible from outside the vehicle.

*Small manufacturer* means a manufacturer meeting the criteria specified in 13 CFR 121.201. The employee and revenue limits apply to the total number employees and total revenue together for affiliated companies.

*Spark-ignition* has the meaning given in § 1037.101.

*Standard payload* means the payload assumed for each vehicle, in tons, for modeling and calculating emission credits, as follows:

(1) For vocational vehicles:

(i) 2.85 tons for light heavy-duty vehicles.

(ii) 5.6 tons for medium heavy-duty vehicles.

(iii) 7.5 tons for heavy heavy-duty vehicles.

(2) For tractors:

(i) 12.5 tons for Class 7.

(ii) 19 tons for Class 8, other than heavy-haul tractors.

(iii) 43 tons for heavy-haul tractors.

(3) For trailers:

(i) 10 tons for short box vans.

(ii) 19 tons for other trailers.

*Standard tractor* has the meaning given in § 1037.501.

*Standard trailer* has the meaning given in § 1037.501.

*Suspend* has the meaning given in 40 CFR 1068.30.

*Test sample* means the collection of vehicles or components selected from the population of a vehicle family for emission testing. This may include testing for certification, production-line testing, or in-use testing.

*Test vehicle* means a vehicle in a test sample.

*Test weight* means the vehicle weight used or represented during testing.

*Tire rolling resistance level (TRRL)* means a value with units of kg/metric ton that represents the rolling resistance of a tire configuration. TRRLs are used as modeling inputs under §§ 1037.515 and 1037.520. Note that a manufacturer may use the measured value for a tire configuration's coefficient of rolling resistance, or assign some higher value.

*Total hydrocarbon* has the meaning given in 40 CFR 1065.1001. This generally means the combined mass of organic compounds measured by the specified procedure for measuring total hydrocarbon, expressed as a hydrocarbon with an atomic hydrogen-to-carbon ratio of 1.85:1.

*Total hydrocarbon equivalent* has the meaning given in 40 CFR 1065.1001.

This generally means the sum of the carbon mass contributions of non-oxygenated hydrocarbons, alcohols and aldehydes, or other organic compounds that are measured separately as contained in a gas sample, expressed as exhaust hydrocarbon from petroleum-fueled vehicles. The atomic hydrogen-to-carbon ratio of the equivalent hydrocarbon is 1.85:1.

*Tractor* has the meaning given for “truck tractor” in 49 CFR 571.3. This includes most heavy-duty vehicles specifically designed for the primary purpose of pulling trailers, but does not include vehicles designed to carry other loads. For purposes of this definition “other loads” would not include loads carried in the cab, sleeper compartment, or toolboxes. Examples of vehicles that are similar to tractors but that are not tractors under this part include dromedary tractors, automobile haulers, straight trucks with trailers hitches, and tow trucks. Note that the provisions of this part that apply for tractors do not apply for tractors that are classified as vocational tractors under § 1037.630.

*Trailer* means a piece of equipment designed for carrying cargo and for being drawn by a tractor when coupled to the tractor's fifth wheel. Trailers may be divided into different types and categories as described in paragraphs (1) through (4) of this definition. The types of equipment identified in paragraph (5) of this definition are not trailers for purposes of this part.

(1) Box vans are trailers with an enclosed cargo space that is permanently attached to the chassis, with fixed sides, nose, and roof and is designed to carry a wide range of freight. Tankers are not box vans.

(2) Box vans with front-mounted, self-contained HVAC systems are refrigerated vans. Note that this includes systems that provide cooling, heating, or both. All other box vans are dry vans.

(3) Trailers that are not box vans are non-box trailers. This includes chassis that are designed only for temporarily mounted containers.

(4) Box trailers with length greater than 50 feet are long box trailers. Other box trailers are short box trailers.

(5) The following types of equipment are not trailers:

(i) Containers that are not permanently mounted on chassis.

(ii) [Reserved]

*Urban Duty Cycle* has the meaning given in § 1037.510.

*Ultimate purchaser* means, with respect to any new vehicle, the first person who in good faith purchases such new vehicle for purposes other than resale.

*United States* has the meaning given in 40 CFR 1068.30.

*Upcoming model year* means for a vehicle family the model year after the one currently in production.

*U.S.-directed production volume* means the number of vehicle units, subject to the requirements of this part, produced by a manufacturer for which the manufacturer has a reasonable assurance that sale was or will be made to ultimate purchasers in the United States. This does not include vehicles certified to state emission standards that are different than the emission standards in this part.

*Useful life* means the period during which a vehicle is required to comply with all applicable emission standards.

*Vehicle* means equipment intended for use on highways that meets at least one of the criteria of paragraph (1) of this definition, as follows:

(1) The following equipment are vehicles:

(i) A piece of equipment that is intended for self-propelled use on highways becomes a vehicle when it includes at least an engine, a transmission, and a frame. (**Note:** For purposes of this definition, any electrical, mechanical, and/or hydraulic devices attached to engines for the purpose of powering wheels are considered to be transmissions.)

(ii) A piece of equipment that is intended for self-propelled use on highways becomes a vehicle when it includes a passenger compartment attached to a frame with axles.

(iii) Trailers. A trailer becomes a vehicle when it has a frame with axles attached.

(2) Vehicles other than trailers may be complete or incomplete vehicles as follows:

(i) A *complete vehicle* is a functioning vehicle that has the primary load carrying device or container (or equivalent equipment) attached. Examples of equivalent equipment would include fifth wheel trailer hitches, firefighting equipment, and utility booms.

(ii) An *incomplete vehicle* is a vehicle that is not a complete vehicle. Incomplete vehicles may also be cab-complete vehicles. This may include vehicles sold to secondary vehicle manufacturers.

(iii) The primary use of the terms “complete vehicle” and “incomplete vehicle” are to distinguish whether a vehicle is complete when it is first sold as a vehicle.

(iv) You may ask us to allow you to certify a vehicle as incomplete if you manufacture the engines and sell the unassembled chassis components, as

long as you do not produce and sell the body components necessary to complete the vehicle.

*Vehicle configuration* means a unique combination of vehicle hardware and calibration (related to measured or modeled emissions) within a vehicle family. Vehicles with hardware or software differences, but that have no hardware or software differences related to measured or modeled emissions may be included in the same vehicle configuration. Note that vehicles with hardware or software differences related to measured or modeled emissions are considered to be different configurations even if they have the same GEM inputs and FEL. Vehicles within a vehicle configuration differ only with respect to normal production variability or factors unrelated to measured or modeled emissions.

*Vehicle family* has the meaning given in § 1037.230.

*Vehicle service class* means a vehicle's weight class as specified in this definition. Note that, while *vehicle service class* is similar to primary intended service class for engines, they are not necessarily the same. For example, a medium heavy-duty vehicle may include a light heavy-duty engine.

(1) Light heavy-duty vehicles are those vehicles with GVWR below 19,500 pounds. Vehicles in this class include heavy-duty pickup trucks and vans, motor homes and other recreational vehicles, and some straight trucks with a single rear axle. Typical applications would include personal transportation, light-load commercial delivery, passenger service, agriculture, and construction.

(2) Medium heavy-duty vehicles are those vehicles with GVWR from 19,500 to 33,000 pounds. Vehicles in this class include school buses, straight trucks with a single rear axle, city tractors, and a variety of special purpose vehicles such as small dump trucks, and refuse trucks. Typical applications would include commercial short haul and intra-city delivery and pickup.

(3) Heavy heavy-duty vehicles are those vehicles with GVWR above 33,000 pounds. Vehicles in this class include tractors, urban buses, and other heavy trucks.

*Vehicle subfamily* or *subfamily* means a subset of a vehicle family including vehicles subject to the same FEL(s).

*Vocational tractor* means a vehicle classified as a vocational tractor under § 1037.630.

*Vocational vehicle* means relating to a vehicle subject to the standards of § 1037.105 (including vocational tractors).

*Void* has the meaning given in 40 CFR 1068.30.

*Volatile liquid fuel* means any fuel other than diesel or biodiesel that is a liquid at atmospheric pressure and has a Reid Vapor Pressure higher than 2.0 pounds per square inch.

*We (us, our)* means the Administrator of the Environmental Protection Agency and any authorized representatives.

#### § 1037.805 Symbols, abbreviations, and acronyms.

The procedures in this part generally follow either the International System of Units (SI) or the United States customary units, as detailed in NIST

Special Publication 811, which we incorporate by reference in § 1037.810. See 40 CFR 1065.20 for specific provisions related to these conventions. This section summarizes the way we use symbols, units of measure, and other abbreviations.

(a) *Symbols for chemical species.* This part uses the following symbols for chemical species and exhaust constituents:

Symbol	Species
C .....	carbon.
CH <sub>4</sub> .....	methane.
CO .....	carbon monoxide.
CO <sub>2</sub> .....	carbon dioxide.

Symbol	Species
H <sub>2</sub> O .....	water.
HC .....	hydrocarbon.
NMHC .....	nonmethane hydrocarbon.
NMHCE .....	nonmethane hydrocarbon equivalent.
NO .....	nitric oxide.
NO <sub>2</sub> .....	nitrogen dioxide.
NO <sub>x</sub> .....	oxides of nitrogen.
N <sub>2</sub> O .....	nitrous oxide.
PM .....	particulate matter.
THC .....	total hydrocarbon.
THCE .....	total hydrocarbon equivalent.

(b) *Symbols for quantities.* This part uses the following symbols and units of measure for various quantities:

Symbol	Quantity	Unit	Unit symbol	Unit in terms of SI base units
$\alpha$ .....	atomic hydrogen-to-carbon ratio.	mole per mole .....	mol/mol .....	1
$\alpha_0$ .....	intercept of air speed correction.			
$\alpha_1$ .....	slope of air speed correction.			
$A$ .....	vehicle frictional load ....	pound force or newton	lbf or N .....	kg·m·s <sup>-2</sup>
$a_g$ .....	acceleration of Earth's gravity.	meters per second squared.	m/s <sup>2</sup> .....	m·s <sup>-2</sup>
$a_0$ .....	intercept of least squares regression.			
$a_1$ .....	slope of least squares regression.			
$B$ .....	vehicle load from drag and rolling resistance.	pound force per mile per hour or newton second per meter.	lbf/mph <sup>2</sup> or N·s <sup>2</sup> /m <sup>2</sup> .....	kg·s <sup>-1</sup>
$\beta$ .....	atomic oxygen-to-carbon ratio.	mole per mole .....	mol/mol .....	1
$\beta_0$ .....	intercept of air direction correction.			
$\beta_1$ .....	slope of air direction correction.			
$C$ .....	vehicle-specific aerodynamic effects.	pound force per mile per hour squared or newton-second squared per meter squared.	lbf/mph <sup>2</sup> or N·s <sup>2</sup> /m <sup>2</sup> .....	kg·m <sup>-1</sup>
$C_i$ .....	constant.			
$C_{DA}$ .....	drag area .....	meter squared .....	m <sup>2</sup> .....	m <sup>2</sup>
$C_D$ .....	drag coefficient.			
$CF$ .....	correction factor.			
$C_{rr}$ .....	coefficient of rolling resistance.	kilogram per metric ton	kg/tonne .....	10 <sup>-3</sup>
$D$ .....	distance .....	miles or meters .....	mi or m .....	m
$e$ .....	mass-weighted emission result.	grams/ton-mile .....	g/ton-mi .....	g/kg-km
$Eff$ .....	efficiency.			
$F$ .....	adjustment factor.			
$F$ .....	force .....	pound force or newton	lbf or N .....	kg·m·s <sup>-2</sup>
$f_n$ .....	angular speed (shaft) ..	revolutions per minute ..	r/min .....	$\pi \cdot 30 \cdot s^{-1}$
$G$ .....	road grade .....	percent .....	% .....	10 <sup>-2</sup>
$g$ .....	gravitational acceleration.	meters per second squared.	m/s <sup>2</sup> .....	m·s <sup>-2</sup>
$h$ .....	elevation or height .....	meters .....	m .....	m
$i$ .....	indexing variable.			
$k_a$ .....	drive axle ratio.			
$k_d$ .....	transmission gear ratio.			
$k_{topgear}$ .....	highest available transmission gear.			
$m$ .....	mass .....	pound mass or kilogram	lbm or kg .....	kg
$M$ .....	molar mass .....	gram per mole .....	g/mol .....	10 <sup>-3</sup> ·kg·mol <sup>-1</sup>
$M$ .....	vehicle mass .....	kilogram .....	kg .....	kg
$M_e$ .....	vehicle effective mass ..	kilogram .....	kg .....	kg

Symbol	Quantity	Unit	Unit symbol	Unit in terms of SI base units
$M_{\text{rotating}}$ .....	inertial mass of rotating components.	kilogram .....	kg .....	kg
$N$ .....	total number in series.			
$\dot{n}$ .....	amount of substance rate.	mole per second .....	mol/s .....	mol·s <sup>-1</sup>
$p$ .....	pressure .....	pascal .....	Pa .....	kg·m <sup>-1</sup> ·s <sup>-2</sup>
$\rho$ .....	mass density .....	kilogram per cubic meter.	kg/m <sup>3</sup> .....	kg·m <sup>-3</sup>
$PL$ .....	payload .....	tons .....	ton .....	kg
$r$ .....	tire radius .....	meter .....	m .....	m
$r^2$ .....	coefficient of determination.			
$Re\#$ .....	Reynolds number.			
$SEE$ .....	standard estimate of error.			
$TRRL$ .....	tire rolling resistance level.	kilogram per metric ton	kg/tonne .....	10 <sup>-3</sup>
$\theta$ .....	wind direction .....	degrees .....	° .....	°
$T$ .....	absolute temperature ..	kelvin .....	K .....	K
$T$ .....	Celsius temperature ....	degree Celsius .....	°C .....	K—273.15
$T$ .....	torque (moment of force).	newton meter .....	N·m .....	m <sup>2</sup> ·kg·s <sup>-2</sup>
$t$ .....	time .....	second .....	s .....	s
$\Delta t$ .....	time interval, period, 1/frequency.	second .....	s .....	s
$v$ .....	speed .....	miles per hour or meters per second.	mph or m/s .....	m·s <sup>-1</sup>
$w$ .....	weighting factor.			
$w$ .....	wind speed .....	miles per hour .....	mph .....	m·s <sup>-1</sup>
$W$ .....	work .....	kilowatt-hour .....	kW·hr .....	3.6·m <sup>2</sup> ·kg·s <sup>-1</sup>
$w_c$ .....	carbon mass fraction ....	gram/gram .....	g/g .....	1
$WR$ .....	weight reduction .....	pound mass .....	lbm .....	kg
$x$ .....	amount of substance mole fraction.	mole per mole .....	mol/mol .....	1

(c) *Superscripts.* This part uses the following superscripts to define a quantity:

Superscript	Quantity
overbar (such as $\bar{y}$ ) ...	arithmetic mean.
overdot (such as $\dot{y}$ ) ...	quantity per unit time.

(d) *Subscripts.* This part uses the following subscripts to define a quantity:

Subscript	Quantity
$\pm 6$ .....	6° yaw angle sweep.
aero .....	aerodynamic.
air .....	air.
alt. ....	alternative.
act .....	actual or measured condition.
air .....	air.
axle .....	axle.
brake .....	brake.
Ccombdry .....	carbon from fuel per mole of dry exhaust.
circuit .....	circuit.
coastdown .....	coastdown.
CO2PTO .....	CO <sub>2</sub> emissions for PTO cycle.
CO2urea .....	CO <sub>2</sub> from urea decomposition.
comp .....	composite.
cycle .....	test cycle.
driver .....	driver.
dyno .....	dynamometer.

Subscript	Quantity
event .....	event.
end .....	end.
fuel .....	fuel.
full .....	full.
grade .....	grade.
H2Oexhaustdry	H <sub>2</sub> O in exhaust per mole of exhaust.
hi .....	high.
in .....	inlet.
idle .....	idle.
lo .....	low.
max .....	maximum.
meas .....	measured quantity.
min .....	minimum.
moving .....	moving.
out .....	outlet.
powertrain .....	powertrain.
record .....	record.
ref .....	reference quantity.
speed .....	speed.
start .....	start.
th .....	theoretical.
total .....	total.
trac .....	traction.
transient .....	transient.
urea .....	urea.
veh .....	vehicle.
w .....	wind.
wa .....	wind average.
yaw .....	yaw angle.
ys .....	yaw sweep.
zero .....	zero quantity.

(e) *Other acronyms and abbreviations.*

This part uses the following additional abbreviations and acronyms:

ABT	averaging, banking, and trading
AECD	auxiliary emission control device
AES	automatic engine shutdown
CFD	computational fluid dynamics
CFR	Code of Federal Regulations
CITT	curb idle transmission torque
DOT	Department of Transportation
EPA	Environmental Protection Agency
FE	fuel economy
FEL	Family Emission Limit
GAWR	gross axle weight rating
GCWR	gross combination weight rating
GEM	greenhouse gas emission model
GVWR	gross vehicle weight rating
HVAC	heating, ventilating, and air conditioning
ISO	International Organization for Standardization
NARA	National Archives and Records Administration
NHTSA	National Highway Transportation Safety Administration
PTO	power take-off
RESS	rechargeable energy storage system
rpm	revolutions per minute
SAE	Society of Automotive Engineers
SKU	stock-keeping unit
TRRL	tire rolling resistance level

U.S.C. United States Code  
VSL vehicle speed limiter

(f) *Constants*. This part uses the following constants:

Symbol	Quantity	Value
<i>g</i> .....	gravitational constant.	9.81 m·s <sup>-2</sup>
<i>R</i> .....	specific gas constant.	287.058 J/(kg·K)

(g) *Prefixes*. This part uses the following prefixes to define a quantity:

Symbol	Quantity	Value
$\mu$ .....	micro .....	10 <sup>-6</sup>
m .....	milli .....	10 <sup>-3</sup>
c .....	centi .....	10 <sup>-2</sup>
k .....	kilo .....	10 <sup>3</sup>
M .....	mega .....	10 <sup>6</sup>

#### § 1037.810 Incorporation by reference.

(a) Certain material is incorporated by reference into this part with the approval of the Director of the Federal Register under 5 U.S.C. 552(a) and 1 CFR part 51. To enforce any edition other than that specified in this section, the Environmental Protection Agency must publish a notice of the change in the **Federal Register** and the material must be available to the public. All approved material is available for inspection at U.S. EPA, Air and Radiation Docket and Information Center, 1301 Constitution Ave. NW., Room B102, EPA West Building, Washington, DC 20460, (202) 202-1744, and is available from the sources listed below. It is also available for inspection at the National Archives and Records Administration (NARA). For information on the availability of this material at NARA, call 202-741-6030, or go to <http://www.archives.gov/federal-register/code-of-federal-regulations/ibr-locations.html>.  
(b) International Organization for Standardization, Case Postale 56, CH-1211 Geneva 20, Switzerland, (41) 22749 0111, [www.iso.org](http://www.iso.org), or [central@iso.org](mailto:central@iso.org).

(1) ISO 28580:2009(E) "Passenger car, truck and bus tyres—Methods of measuring rolling resistance—Single point test and correlation of measurement results", First Edition, July 1, 2009, ("ISO 28580"), IBR approved for § 1037.520(c).  
(2) [Reserved]

(c) U.S. EPA, Office of Air and Radiation, 2565 Plymouth Road, Ann Arbor, MI 48105, [www.epa.gov](http://www.epa.gov).

(1) Greenhouse gas Emissions Model (GEM) simulation tool, Version 2.0.1, September 2012 ("GEM version 2.0.1"), IBR approved for § 1037.520. The computer code for this model is

available as noted in paragraph (a) of this section. A working version of this software is also available for download at <http://www.epa.gov/otaq/climate/gem.htm>.

(2) Greenhouse gas Emissions Model (GEM) Phase 2 simulation tool, Version 1.0, June 2015 ("GEM Phase 2 version 1.0", or "GEM\_P2v1.0"); IBR approved for § 1037.520. The computer code for this model is available as noted in paragraph (a) of this section. A working version of this software is also available for download at <http://www.epa.gov/otaq/climate/gem.htm>.

(d) SAE International, 400 Commonwealth Dr., Warrendale, PA 15096-0001, (877) 606-7323 (U.S. and Canada) or (724) 776-4970 (outside the U.S. and Canada), <http://www.sae.org>.

(1) SAE J1252, SAE Wind Tunnel Test Procedure for Trucks and Buses, Revised July 2012, ("SAE J1252"), IBR approved for §§ 1037.525(d), 1037.529(a), and 1037.531(a).

(2) SAE J1263, Road Load Measurement and Dynamometer Simulation Using Coastdown Techniques, revised March 2010, ("SAE J1263"), IBR approved for §§ 1037.527 and 1037.665(a).

(3) SAE J1594, Vehicle Aerodynamics Terminology, Revised July 2010, ("SAE J1594"), IBR approved for § 1037.529(d).

(4) SAE J2071, Aerodynamic Testing of Road Vehicles—Open Throat Wind Tunnel Adjustment, Revised June 1994, ("SAE J2071"), IBR approved for § 1037.529(b).

(5) SAE J2263, Road Load Measurement Using Onboard Anemometry and Coastdown Techniques, revised December 2008, ("SAE J2263"), IBR approved for §§ 1037.527 and 1037.665(a).

(6) SAE J2343, Recommended Practice for LNG Medium and Heavy-Duty Powered Vehicles, Revised July 2008, ("SAE J2343"), IBR approved for § 1037.103(e).

(e) BASF Corporation, 100 Park Avenue, Florham Park, NJ 07932, (973) 245-6000, <http://www.basf.com>.

(1) BASF TI/EVO 0137 e, Emgard® FE 75W-90 Fuel Efficient Synthetic Gear Lubricant, April 2012, IBR approved for § 1037.560(a).

(2) [Reserved]

(f) National Institute of Standards and Technology, 100 Bureau Drive, Stop 1070, Gaithersburg, MD 20899-1070, (301) 975-6478, or [www.nist.gov](http://www.nist.gov).

(1) NIST Special Publication 811, 2008 Edition, Guide for the Use of the International System of Units (SI), March 2008, IBR approved for § 1037.805.

(2) [Reserved]

#### § 1037.815 Confidential information.

The provisions of 40 CFR 1068.10 apply for information you consider confidential.

#### § 1037.820 Requesting a hearing.

(a) You may request a hearing under certain circumstances, as described elsewhere in this part. To do this, you must file a written request, including a description of your objection and any supporting data, within 30 days after we make a decision.

(b) For a hearing you request under the provisions of this part, we will approve your request if we find that your request raises a substantial factual issue.

(c) If we agree to hold a hearing, we will use the procedures specified in 40 CFR part 1068, subpart G.

#### § 1037.825 Reporting and recordkeeping requirements.

(a) This part includes various requirements to submit and record data or other information. Unless we specify otherwise, store required records in any format and on any media and keep them readily available for eight years after you send an associated application for certification, or eight years after you generate the data if they do not support an application for certification. You may not rely on anyone else to meet recordkeeping requirements on your behalf unless we specifically authorize it. We may review these records at any time. You must promptly send us organized, written records in English if we ask for them. We may require you to submit written records in an electronic format.

(b) The regulations in § 1037.255 and 40 CFR 1068.25 and 1068.101 describe your obligation to report truthful and complete information. This includes information not related to certification. Failing to properly report information and keep the records we specify violates 40 CFR 1068.101(a)(2), which may involve civil or criminal penalties.

(c) Send all reports and requests for approval to the Designated Compliance Officer (see § 1037.801).

(d) Any written information we require you to send to or receive from another company is deemed to be a required record under this section. Such records are also deemed to be submissions to EPA. Keep these records for eight years unless the regulations specify a different period. We may require you to send us these records whether or not you are a certificate holder.

(e) Under the Paperwork Reduction Act (44 U.S.C. 3501 *et seq.*), the Office of Management and Budget approves

the reporting and recordkeeping specified in the applicable regulations. The following items illustrate the kind of reporting and recordkeeping we require for vehicles regulated under this part:

(1) We specify the following requirements related to vehicle certification in this part 1037:

(i) In subpart C of this part we identify a wide range of information required to certify vehicles.

(ii) In subpart G of this part we identify several reporting and recordkeeping items for making demonstrations and getting approval related to various special compliance provisions.

(iii) In § 1037.725, 1037.730, and 1037.735 we specify certain records related to averaging, banking, and trading.

(2) We specify the following requirements related to testing in 40 CFR part 1066:

(i) In 40 CFR 1066.2 we give an overview of principles for reporting information.

(ii) In 40 CFR 1066.25 we establish basic guidelines for storing test information.

(iii) In 40 CFR 1066.695 we identify the specific information and data items to record when measuring emissions.

(3) We specify the following requirements related to the general compliance provisions in 40 CFR part 1068:

(i) In 40 CFR 1068.5 we establish a process for evaluating good engineering judgment related to testing and certification.

(ii) In 40 CFR 1068.25 we describe general provisions related to sending and keeping information.

(iii) In 40 CFR 1068.27 we require manufacturers to make engines available for our testing or inspection if we make such a request.

(iv) In 40 CFR 1068.105 we require vehicle manufacturers to keep certain records related to duplicate labels from engine manufacturers.

(v) In 40 CFR 1068.120 we specify recordkeeping related to rebuilding engines.

(vi) In 40 CFR part 1068, subpart C, we identify several reporting and recordkeeping items for making demonstrations and getting approval related to various exemptions.

(vii) In 40 CFR part 1068, subpart D, we identify several reporting and recordkeeping items for making demonstrations and getting approval related to importing engines.

(viii) In 40 CFR 1068.450 and 1068.455 we specify certain records related to testing production-line

engines in a selective enforcement audit.

(ix) In 40 CFR 1068.501 we specify certain records related to investigating and reporting emission-related defects.

(x) In 40 CFR 1068.525 and 1068.530 we specify certain records related to recalling nonconforming engines.

#### Appendix I to Part 1037—Heavy-Duty Transient Test Cycle

	Time (sec)	Speed (mph)	Speed (m/s)
1 .....	0.00	0.00	0.00
2 .....	0.00	0.00	0.00
3 .....	0.00	0.00	0.00
4 .....	0.00	0.00	0.00
5 .....	0.00	0.00	0.00
6 .....	0.00	0.00	0.00
7 .....	0.41	0.18	0.18
8 .....	1.18	0.53	0.53
9 .....	2.26	1.01	1.01
10 .....	3.19	1.43	1.43
11 .....	3.97	1.77	1.77
12 .....	4.66	2.08	2.08
13 .....	5.32	2.38	2.38
14 .....	5.94	2.66	2.66
15 .....	6.48	2.90	2.90
16 .....	6.91	3.09	3.09
17 .....	7.28	3.25	3.25
18 .....	7.64	3.42	3.42
19 .....	8.02	3.59	3.59
20 .....	8.36	3.74	3.74
21 .....	8.60	3.84	3.84
22 .....	8.74	3.91	3.91
23 .....	8.82	3.94	3.94
24 .....	8.82	3.94	3.94
25 .....	8.76	3.92	3.92
26 .....	8.66	3.87	3.87
27 .....	8.58	3.84	3.84
28 .....	8.52	3.81	3.81
29 .....	8.46	3.78	3.78
30 .....	8.38	3.75	3.75
31 .....	8.31	3.71	3.71
32 .....	8.21	3.67	3.67
33 .....	8.11	3.63	3.63
34 .....	8.00	3.58	3.58
35 .....	7.94	3.55	3.55
36 .....	7.94	3.55	3.55
37 .....	7.80	3.49	3.49
38 .....	7.43	3.32	3.32
39 .....	6.79	3.04	3.04
40 .....	5.81	2.60	2.60
41 .....	4.65	2.08	2.08
42 .....	3.03	1.35	1.35
43 .....	1.88	0.84	0.84
44 .....	1.15	0.51	0.51
45 .....	1.14	0.51	0.51
46 .....	1.12	0.50	0.50
47 .....	1.11	0.50	0.50
48 .....	1.19	0.53	0.53
49 .....	1.57	0.70	0.70
50 .....	2.31	1.03	1.03
51 .....	3.37	1.51	1.51
52 .....	4.51	2.02	2.02
53 .....	5.56	2.49	2.49
54 .....	6.41	2.87	2.87
55 .....	7.09	3.17	3.17
56 .....	7.59	3.39	3.39
57 .....	7.99	3.57	3.57
58 .....	8.32	3.72	3.72
59 .....	8.64	3.86	3.86
60 .....	8.91	3.98	3.98
61 .....	9.13	4.08	4.08
62 .....			9.29
63 .....			9.40
64 .....			9.39
65 .....			9.20
66 .....			8.84
67 .....			8.35
68 .....			7.81
69 .....			7.22
70 .....			6.65
71 .....			6.13
72 .....			5.75
73 .....			5.61
74 .....			5.65
75 .....			5.80
76 .....			5.95
77 .....			6.09
78 .....			6.21
79 .....			6.31
80 .....			6.34
81 .....			6.47
82 .....			6.65
83 .....			6.88
84 .....			7.04
85 .....			7.05
86 .....			7.01
87 .....			6.90
88 .....			6.88
89 .....			6.89
90 .....			6.96
91 .....			7.04
92 .....			7.17
93 .....			7.29
94 .....			7.39
95 .....			7.48
96 .....			7.57
97 .....			7.61
98 .....			7.59
99 .....			7.53
100 .....			7.46
101 .....			7.40
102 .....			7.39
103 .....			7.38
104 .....			7.37
105 .....			7.37
106 .....			7.39
107 .....			7.42
108 .....			7.43
109 .....			7.40
110 .....			7.39
111 .....			7.42
112 .....			7.50
113 .....			7.57
114 .....			7.60
115 .....			7.60
116 .....			7.61
117 .....			7.64
118 .....			7.68
119 .....			7.74
120 .....			7.82
121 .....			7.90
122 .....			7.96
123 .....			7.99
124 .....			8.02
125 .....			8.01
126 .....			7.87
127 .....			7.59
128 .....			7.20
129 .....			6.52
130 .....			5.53
131 .....			4.36
132 .....			3.30
133 .....			2.50
134 .....			1.94

Time (sec)	Speed (mph)	Speed (m/s)	Time (sec)	Speed (mph)	Speed (m/s)	Time (sec)	Speed (mph)	Speed (m/s)
135 .....	1.56	0.70	208 .....	25.99	11.62	281 .....	26.95	12.05
136 .....	0.95	0.42	209 .....	24.77	11.07	282 .....	27.03	12.08
137 .....	0.42	0.19	210 .....	24.04	10.75	283 .....	27.30	12.20
138 .....	0.00	0.00	211 .....	23.39	10.46	284 .....	28.10	12.56
139 .....	0.00	0.00	212 .....	22.73	10.16	285 .....	29.44	13.16
140 .....	0.00	0.00	213 .....	22.16	9.91	286 .....	30.78	13.76
141 .....	0.00	0.00	214 .....	21.66	9.68	287 .....	32.09	14.35
142 .....	0.00	0.00	215 .....	21.39	9.56	288 .....	33.24	14.86
143 .....	0.00	0.00	216 .....	21.43	9.58	289 .....	34.46	15.40
144 .....	0.00	0.00	217 .....	20.67	9.24	290 .....	35.42	15.83
145 .....	0.00	0.00	218 .....	17.98	8.04	291 .....	35.88	16.04
146 .....	0.00	0.00	219 .....	13.15	5.88	292 .....	36.03	16.11
147 .....	0.00	0.00	220 .....	7.71	3.45	293 .....	35.84	16.02
148 .....	0.00	0.00	221 .....	3.30	1.48	294 .....	35.65	15.94
149 .....	0.00	0.00	222 .....	0.88	0.39	295 .....	35.31	15.78
150 .....	0.00	0.00	223 .....	0.00	0.00	296 .....	35.19	15.73
151 .....	0.00	0.00	224 .....	0.00	0.00	297 .....	35.12	15.70
152 .....	0.00	0.00	225 .....	0.00	0.00	298 .....	35.12	15.70
153 .....	0.00	0.00	226 .....	0.00	0.00	299 .....	35.04	15.66
154 .....	0.00	0.00	227 .....	0.00	0.00	300 .....	35.08	15.68
155 .....	0.00	0.00	228 .....	0.00	0.00	301 .....	35.04	15.66
156 .....	0.00	0.00	229 .....	0.00	0.00	302 .....	35.34	15.80
157 .....	0.00	0.00	230 .....	0.00	0.00	303 .....	35.50	15.87
158 .....	0.00	0.00	231 .....	0.00	0.00	304 .....	35.77	15.99
159 .....	0.00	0.00	232 .....	0.00	0.00	305 .....	35.81	16.01
160 .....	0.00	0.00	233 .....	0.00	0.00	306 .....	35.92	16.06
161 .....	0.00	0.00	234 .....	0.00	0.00	307 .....	36.23	16.20
162 .....	0.00	0.00	235 .....	0.00	0.00	308 .....	36.42	16.28
163 .....	0.00	0.00	236 .....	0.00	0.00	309 .....	36.65	16.38
164 .....	0.00	0.00	237 .....	0.00	0.00	310 .....	36.26	16.21
165 .....	0.00	0.00	238 .....	0.00	0.00	311 .....	36.07	16.12
166 .....	0.00	0.00	239 .....	0.00	0.00	312 .....	35.84	16.02
167 .....	0.00	0.00	240 .....	0.00	0.00	313 .....	35.96	16.08
168 .....	0.00	0.00	241 .....	0.00	0.00	314 .....	36.00	16.09
169 .....	0.00	0.00	242 .....	0.00	0.00	315 .....	35.57	15.90
170 .....	0.00	0.00	243 .....	0.00	0.00	316 .....	35.00	15.65
171 .....	0.00	0.00	244 .....	0.00	0.00	317 .....	34.08	15.24
172 .....	1.11	0.50	245 .....	0.00	0.00	318 .....	33.39	14.93
173 .....	2.65	1.18	246 .....	0.00	0.00	319 .....	32.20	14.39
174 .....	4.45	1.99	247 .....	0.00	0.00	320 .....	30.32	13.55
175 .....	5.68	2.54	248 .....	0.00	0.00	321 .....	28.48	12.73
176 .....	6.75	3.02	249 .....	0.00	0.00	322 .....	26.95	12.05
177 .....	7.59	3.39	250 .....	0.00	0.00	323 .....	26.18	11.70
178 .....	7.75	3.46	251 .....	0.00	0.00	324 .....	25.38	11.35
179 .....	7.63	3.41	252 .....	0.00	0.00	325 .....	24.77	11.07
180 .....	7.67	3.43	253 .....	0.00	0.00	326 .....	23.46	10.49
181 .....	8.70	3.89	254 .....	0.00	0.00	327 .....	22.39	10.01
182 .....	10.20	4.56	255 .....	0.00	0.00	328 .....	20.97	9.37
183 .....	11.92	5.33	256 .....	0.00	0.00	329 .....	20.09	8.98
184 .....	12.84	5.74	257 .....	0.00	0.00	330 .....	18.90	8.45
185 .....	13.27	5.93	258 .....	0.00	0.00	331 .....	18.17	8.12
186 .....	13.38	5.98	259 .....	0.50	0.22	332 .....	16.48	7.37
187 .....	13.61	6.08	260 .....	1.57	0.70	333 .....	15.07	6.74
188 .....	14.15	6.33	261 .....	3.07	1.37	334 .....	12.23	5.47
189 .....	14.84	6.63	262 .....	4.57	2.04	335 .....	10.08	4.51
190 .....	16.49	7.37	263 .....	5.65	2.53	336 .....	7.71	3.45
191 .....	18.33	8.19	264 .....	6.95	3.11	337 .....	7.32	3.27
192 .....	20.36	9.10	265 .....	8.05	3.60	338 .....	8.63	3.86
193 .....	21.47	9.60	266 .....	9.13	4.08	339 .....	10.77	4.81
194 .....	22.35	9.99	267 .....	10.05	4.49	340 .....	12.65	5.66
195 .....	22.96	10.26	268 .....	11.62	5.19	341 .....	13.88	6.20
196 .....	23.46	10.49	269 .....	12.92	5.78	342 .....	15.03	6.72
197 .....	23.92	10.69	270 .....	13.84	6.19	343 .....	15.64	6.99
198 .....	24.42	10.92	271 .....	14.38	6.43	344 .....	16.99	7.60
199 .....	24.99	11.17	272 .....	15.64	6.99	345 .....	17.98	8.04
200 .....	25.91	11.58	273 .....	17.14	7.66	346 .....	19.13	8.55
201 .....	26.26	11.74	274 .....	18.21	8.14	347 .....	18.67	8.35
202 .....	26.38	11.79	275 .....	18.90	8.45	348 .....	18.25	8.16
203 .....	26.26	11.74	276 .....	19.44	8.69	349 .....	18.17	8.12
204 .....	26.49	11.84	277 .....	20.09	8.98	350 .....	18.40	8.23
205 .....	26.76	11.96	278 .....	21.89	9.79	351 .....	19.63	8.78
206 .....	27.07	12.10	279 .....	24.15	10.80	352 .....	20.32	9.08
207 .....	26.64	11.91	280 .....	26.26	11.74	353 .....	21.43	9.58

Time (sec)	Speed (mph)	Speed (m/s)	Time (sec)	Speed (mph)	Speed (m/s)	Time (sec)	Speed (mph)	Speed (m/s)
354	21.47	9.60	427	0.00	0.00	500	0.00	0.00
355	21.97	9.82	428	0.61	0.27	501	0.00	0.00
356	22.27	9.96	429	1.19	0.53	502	0.00	0.00
357	22.69	10.14	430	1.61	0.72	503	0.00	0.00
358	23.15	10.35	431	1.53	0.68	504	0.00	0.00
359	23.69	10.59	432	2.34	1.05	505	0.00	0.00
360	23.96	10.71	433	4.29	1.92	506	0.00	0.00
361	24.27	10.85	434	7.25	3.24	507	0.00	0.00
362	24.34	10.88	435	10.20	4.56	508	0.00	0.00
363	24.50	10.95	436	12.46	5.57	509	0.00	0.00
364	24.42	10.92	437	14.53	6.50	510	0.00	0.00
365	24.38	10.90	438	16.22	7.25	511	0.00	0.00
366	24.31	10.87	439	17.87	7.99	512	0.00	0.00
367	24.23	10.83	440	19.74	8.82	513	0.00	0.00
368	24.69	11.04	441	21.01	9.39	514	0.00	0.00
369	25.11	11.23	442	22.23	9.94	515	0.00	0.00
370	25.53	11.41	443	22.62	10.11	516	0.00	0.00
371	25.38	11.35	444	23.61	10.55	517	0.00	0.00
372	24.58	10.99	445	24.88	11.12	518	0.00	0.00
373	23.77	10.63	446	26.15	11.69	519	0.00	0.00
374	23.54	10.52	447	26.99	12.07	520	0.00	0.00
375	23.50	10.51	448	27.56	12.32	521	0.00	0.00
376	24.15	10.80	449	28.18	12.60	522	0.50	0.22
377	24.30	10.86	450	28.94	12.94	523	1.50	0.67
378	24.15	10.80	451	29.83	13.34	524	3.00	1.34
379	23.19	10.37	452	30.78	13.76	525	4.50	2.01
380	22.50	10.06	453	31.82	14.22	526	5.80	2.59
381	21.93	9.80	454	32.78	14.65	527	6.52	2.91
382	21.85	9.77	455	33.24	14.86	528	6.75	3.02
383	21.55	9.63	456	33.47	14.96	529	6.44	2.88
384	21.89	9.79	457	33.31	14.89	530	6.17	2.76
385	21.97	9.82	458	33.08	14.79	531	6.33	2.83
386	21.97	9.82	459	32.78	14.65	532	6.71	3.00
387	22.01	9.84	460	32.39	14.48	533	7.40	3.31
388	21.85	9.77	461	32.13	14.36	534	7.67	3.43
389	21.62	9.67	462	31.82	14.22	535	7.33	3.28
390	21.62	9.67	463	31.55	14.10	536	6.71	3.00
391	22.01	9.84	464	31.25	13.97	537	6.41	2.87
392	22.81	10.20	465	30.94	13.83	538	6.60	2.95
393	23.54	10.52	466	30.71	13.73	539	6.56	2.93
394	24.38	10.90	467	30.56	13.66	540	5.94	2.66
395	24.80	11.09	468	30.79	13.76	541	5.45	2.44
396	24.61	11.00	469	31.13	13.92	542	5.87	2.62
397	23.12	10.34	470	31.55	14.10	543	6.71	3.00
398	21.62	9.67	471	31.51	14.09	544	7.56	3.38
399	19.90	8.90	472	31.47	14.07	545	7.59	3.39
400	18.86	8.43	473	31.44	14.05	546	7.63	3.41
401	17.79	7.95	474	31.51	14.09	547	7.67	3.43
402	17.25	7.71	475	31.59	14.12	548	7.67	3.43
403	16.91	7.56	476	31.67	14.16	549	7.48	3.34
404	16.75	7.49	477	32.01	14.31	550	7.29	3.26
405	16.75	7.49	478	32.63	14.59	551	7.29	3.26
406	16.87	7.54	479	33.39	14.93	552	7.40	3.31
407	16.37	7.32	480	34.31	15.34	553	7.48	3.34
408	16.37	7.32	481	34.81	15.56	554	7.52	3.36
409	16.49	7.37	482	34.20	15.29	555	7.52	3.36
410	17.21	7.69	483	32.39	14.48	556	7.48	3.34
411	17.41	7.78	484	30.29	13.54	557	7.44	3.33
412	17.37	7.77	485	28.56	12.77	558	7.28	3.25
413	16.87	7.54	486	26.45	11.82	559	7.21	3.22
414	16.72	7.47	487	24.79	11.08	560	7.09	3.17
415	16.22	7.25	488	23.12	10.34	561	7.06	3.16
416	15.76	7.05	489	20.73	9.27	562	7.29	3.26
417	14.72	6.58	490	18.33	8.19	563	7.75	3.46
418	13.69	6.12	491	15.72	7.03	564	8.55	3.82
419	12.00	5.36	492	13.11	5.86	565	9.09	4.06
420	10.43	4.66	493	10.47	4.68	566	10.04	4.49
421	8.71	3.89	494	7.82	3.50	567	11.12	4.97
422	7.44	3.33	495	5.70	2.55	568	12.46	5.57
423	5.71	2.55	496	3.57	1.60	569	13.00	5.81
424	4.22	1.89	497	0.92	0.41	570	14.26	6.37
425	2.30	1.03	498	0.00	0.00	571	15.37	6.87
426	1.00	0.45	499	0.00	0.00	572	17.02	7.61



Time (sec)	Speed (mph)	Speed (m/s)	Time (sec)	Speed (mph)	Speed (m/s)	Time (sec)	Speed (mph)	Speed (m/s)
573 .....	18.17	8.12	607 .....	43.24	19.33	641 .....	28.83	12.89
574 .....	19.21	8.59	608 .....	43.59	19.49	642 .....	26.45	11.82
575 .....	20.17	9.02	609 .....	44.01	19.67	643 .....	24.27	10.85
576 .....	20.66	9.24	610 .....	44.35	19.83	644 .....	22.04	9.85
577 .....	21.12	9.44	611 .....	44.55	19.92	645 .....	19.82	8.86
578 .....	21.43	9.58	612 .....	44.82	20.04	646 .....	17.04	7.62
579 .....	22.66	10.13	613 .....	45.05	20.14	647 .....	14.26	6.37
580 .....	23.92	10.69	614 .....	45.31	20.26	648 .....	11.52	5.15
581 .....	25.42	11.36	615 .....	45.58	20.38	649 .....	8.78	3.93
582 .....	25.53	11.41	616 .....	46.00	20.56	650 .....	7.17	3.21
583 .....	26.68	11.93	617 .....	46.31	20.70	651 .....	5.56	2.49
584 .....	28.14	12.58	618 .....	46.54	20.81	652 .....	3.72	1.66
585 .....	30.06	13.44	619 .....	46.61	20.84	653 .....	3.38	1.51
586 .....	30.94	13.83	620 .....	46.92	20.98	654 .....	3.11	1.39
587 .....	31.63	14.14	621 .....	47.19	21.10	655 .....	2.58	1.15
588 .....	32.36	14.47	622 .....	47.46	21.22	656 .....	1.66	0.74
589 .....	33.24	14.86	623 .....	47.54	21.25	657 .....	0.67	0.30
590 .....	33.66	15.05	624 .....	47.54	21.25	658 .....	0.00	0.00
591 .....	34.12	15.25	625 .....	47.54	21.25	659 .....	0.00	0.00
592 .....	35.92	16.06	626 .....	47.50	21.23	660 .....	0.00	0.00
593 .....	37.72	16.86	627 .....	47.50	21.23	661 .....	0.00	0.00
594 .....	39.26	17.55	628 .....	47.50	21.23	662 .....	0.00	0.00
595 .....	39.45	17.64	629 .....	47.31	21.15	663 .....	0.00	0.00
596 .....	39.83	17.81	630 .....	47.04	21.03	664 .....	0.00	0.00
597 .....	40.18	17.96	631 .....	46.77	20.91	665 .....	0.00	0.00
598 .....	40.48	18.10	632 .....	45.54	20.36	666 .....	0.00	0.00
599 .....	40.75	18.22	633 .....	43.24	19.33	667 .....	0.00	0.00
600 .....	41.02	18.34	634 .....	41.52	18.56	668 .....	0.00	0.00
601 .....	41.36	18.49	635 .....	39.79	17.79			
602 .....	41.79	18.68	636 .....	38.07	17.02			
603 .....	42.40	18.95	637 .....	36.34	16.25			
604 .....	42.82	19.14	638 .....	34.04	15.22			
605 .....	43.05	19.25	639 .....	32.45	14.51			
606 .....	43.09	19.26	640 .....	30.86	13.80			

**Appendix II to Part 1037—Power Take-Off Test Cycle**

Cycle simulation	Mode	Start time of mode	Normalized pressure, circuit 1 (%)	Normalized pressure, circuit 2 (%)
Utility .....	0	0	0.0	0.0
Utility .....	1	33	80.5	0.0
Utility .....	2	40	0.0	0.0
Utility .....	3	145	83.5	0.0
Utility .....	4	289	0.0	0.0
Refuse .....	5	361	0.0	13.0
Refuse .....	6	363	0.0	38.0
Refuse .....	7	373	0.0	53.0
Refuse .....	8	384	0.0	73.0
Refuse .....	9	388	0.0	0.0
Refuse .....	10	401	0.0	13.0
Refuse .....	11	403	0.0	38.0
Refuse .....	12	413	0.0	53.0
Refuse .....	13	424	0.0	73.0
Refuse .....	14	442	11.2	0.0
Refuse .....	15	468	29.3	0.0
Refuse .....	16	473	0.0	0.0
Refuse .....	17	486	11.2	0.0
Refuse .....	18	512	29.3	0.0
Refuse .....	19	517	0.0	0.0
Refuse .....	20	530	12.8	11.1
Refuse .....	21	532	12.8	38.2
Refuse .....	22	541	12.8	53.4
Refuse .....	23	550	12.8	73.5
Refuse .....	24	553	0.0	0.0
Refuse .....	25	566	12.8	11.1
Refuse .....	26	568	12.8	38.2
Refuse .....	27	577	12.8	53.4
Refuse .....	28	586	12.8	73.5
Refuse .....	29	589	0.0	0.0
Refuse .....	30	600	0.0	0.0

**Appendix III to Part 1037—Emission Control Identifiers**

This appendix identifies abbreviations for emission control information labels, as required under § 1037.135.

**Vehicle Speed Limiters**

- VSL—Vehicle speed limiter
- VSLs—“Soft-top” vehicle speed limiter
- VSLE—Expiring vehicle speed limiter
- VSLD—Vehicle speed limiter with both “soft-top” and expiration

**Idle Reduction Technology**

- IRT5—Engine shutoff after 5 minutes or less of idling
- IRTE—Expiring engine shutoff

**Tires**

- LRRR—Low rolling resistance tires (all)
- LRRD—Low rolling resistance tires (drive)
- LRRS—Low rolling resistance tires (steer)

**Aerodynamic Components**

- ATS—Aerodynamic side skirt and/or fuel tank fairing
- ARF—Aerodynamic roof fairing
- ARFR—Adjustable height aerodynamic roof fairing
- TGR—Gap reducing tractor fairing (tractor to trailer gap)
- TGRT—Gap reducing trailer fairing (tractor to trailer gap)
- TATS—Trailer aerodynamic side skirt
- TARF—Trailer aerodynamic rear fairing
- TAUD—Trailer aerodynamic underbody device

**Other Components**

- ADVH—Vehicle includes advanced hybrid technology components
- ADVO—Vehicle includes other advanced technology components (*i.e.*, non-hybrid system)
- INV—Vehicle includes innovative (off-cycle) technology components
- ATI—Automatic tire inflation system
- WRTW—Weight-reducing trailer wheels
- WRTC—Weight-reducing trailer upper coupler plate
- WRTS—Weight-reducing trailer axle sub-frames
- WBSW—Wide-based single trailer tires with steel wheel
- WBAW—Wide-based single trailer tires with aluminum wheel
- WBLW—Wide-based single trailer tires with light-weight aluminum alloy wheel
- DWSW—Dual-wide trailer tires with steel wheel
- DWAU—Dual-wide trailer tires with aluminum wheel
- DWLW—Dual-wide trailer tires with light-weight aluminum alloy wheel

**Appendix IV to Part 1037—Heavy-Duty Grade Profile for Phase 2 Steady-State Test Cycles**

Distance (m)	Grade (%)	Distance (m)	Grade (%)
0	0	1121	0.71
2	0	1124	0.8
5	0	1126	0.85
7	–0.01	1128	0.89
10	–0.03	1131	0.94
		1133	0.99
		1136	1.03
		1163	1.03
		1165	1.17
		1168	1.24
		1170	1.24
		1172	1.38
		1175	1.45
		1177	1.52
		1180	1.59
		1182	1.66
		1185	1.73
		1258	1.73
		1260	1.74
		1262	1.75
		1265	1.76
		1267	1.76
		1270	1.77
		1272	1.78
		1275	1.79
		1277	1.8
		1279	1.81
		1282	1.82
		1357	1.82
		1360	1.81
		1364	1.81
		1367	1.8
		1372	1.8
		1374	1.79
		1377	1.79
		1379	1.78
		1384	1.78
		1386	1.77
		1394	1.77
		1396	1.76
		1401	1.76
		1403	1.75
		1486	1.75
		1488	1.76
		1561	1.76
		1564	1.77
		1598	1.77
		1600	1.78
		1695	1.78
		1698	1.77
		1703	1.77
		1705	1.76
		1710	1.76
		1713	1.75
		1717	1.75
		1720	1.74
		1725	1.74
		1727	1.73
		1735	1.73
		1737	1.72
		1742	1.72
		1744	1.71
		1769	1.71
		1771	1.7
		1774	1.69
		1776	1.68
		1778	1.67
		1781	1.66
		1783	1.65
		1786	1.64
		1788	1.63
		1791	1.62
		1793	1.61

Distance (m)	Grade (%)	Distance (m)	Grade (%)	Distance (m)	Grade (%)
1818	1.61	2360	-0.5	4023	-0.87
1820	1.58	2362	-0.49	4026	-0.89
1822	1.55	2367	-0.49	4028	-0.9
1825	1.52	2370	-0.48	4031	-0.92
1827	1.49	2377	-0.48	4033	-0.93
1830	1.46	2380	-0.47	4110	-0.93
1832	1.43	2436	-0.47	4112	-0.95
1835	1.41	2439	-0.46	4115	-0.99
1837	1.38	2483	-0.46	4117	-1
1840	1.35	2485	-0.45	4119	-1.02
1842	1.32	2508	-0.45	4122	-1.04
1940	1.32	2510	-0.44	4124	-1.06
1943	1.27	2530	-0.44	4127	-1.07
1945	1.21	2532	-0.43	4129	-1.09
1947	1.16	2672	-0.43	4132	-1.11
1950	1.11	2675	-0.44	4233	-1.11
1952	1.06	2694	-0.44	4236	-1.1
1955	1.01	2697	-0.45	4243	-1.1
1957	0.96	2717	-0.45	4246	-1.09
1960	0.91	2719	-0.46	4288	-1.09
1962	0.85	2817	-0.46	4290	-1.08
1965	0.8	2820	-0.47	4385	-1.08
1989	0.8	2881	-0.47	4387	-1.07
1992	0.77	2884	-0.46	4399	-1.07
1994	0.74	2899	-0.46	4402	-1.06
1997	0.71	2901	-0.45	4429	-1.06
1999	0.71	2916	-0.45	4432	-1.04
2002	0.65	2918	-0.44	4434	-1.03
2004	0.61	3034	-0.44	4437	-1.01
2006	0.58	3036	-0.43	4439	-0.99
2009	0.55	3157	-0.43	4442	-0.97
2011	0.52	3159	-0.42	4444	-0.97
2014	0.49	3233	-0.42	4447	-0.93
2016	0.44	3236	-0.43	4449	-0.91
2019	0.38	3398	-0.43	4452	-0.9
2021	0.33	3401	-0.42	4454	-0.88
2024	0.28	3570	-0.42	4553	-0.88
2026	0.23	3573	-0.43	4556	-0.83
2029	0.18	3580	-0.43	4558	-0.83
2031	0.12	3583	-0.44	4561	-0.74
2034	0.07	3588	-0.44	4563	-0.74
2036	0.02	3590	-0.45	4566	-0.64
2038	-0.03	3789	-0.45	4568	-0.59
2165	-0.03	3792	-0.44	4571	-0.55
2167	-0.09	3802	-0.44	4573	-0.5
2170	-0.12	3804	-0.43	4576	-0.45
2172	-0.15	3861	-0.43	4578	-0.41
2175	-0.18	3863	-0.45	4603	-0.41
2177	-0.2	3866	-0.47	4605	-0.39
2180	-0.23	3868	-0.49	4608	-0.37
2182	-0.26	3871	-0.51	4610	-0.35
2185	-0.26	3873	-0.53	4613	-0.33
2187	-0.32	3875	-0.55	4615	-0.32
2190	-0.33	3878	-0.57	4618	-0.3
2192	-0.34	3880	-0.59	4620	-0.28
2194	-0.36	3883	-0.59	4623	-0.26
2197	-0.37	3885	-0.63	4625	-0.24
2199	-0.38	3984	-0.63	4628	-0.23
2202	-0.39	3986	-0.65	4652	-0.23
2204	-0.41	3989	-0.66	4655	-0.2
2207	-0.42	3991	-0.68	4657	-0.2
2209	-0.43	3994	-0.69	4660	-0.16
2212	-0.45	3996	-0.71	4662	-0.14
2269	-0.45	3999	-0.72	4665	-0.11
2271	-0.46	4001	-0.74	4667	-0.09
2278	-0.46	4004	-0.75	4670	-0.07
2281	-0.47	4006	-0.75	4672	-0.05
2288	-0.47	4008	-0.78	4675	-0.02
2291	-0.48	4011	-0.8	4677	0
2298	-0.48	4013	-0.81	4751	0
2301	-0.49	4016	-0.83	4753	-0.01
2308	-0.49	4018	-0.84	4756	-0.01
2311	-0.5	4021	-0.84	4758	-0.02

Distance (m)	Grade (%)	Distance (m)	Grade (%)	Distance (m)	Grade (%)
4760	-0.02	5586	0.98	6429	0.97
4763	-0.03	5588	1	6431	0.94
4765	-0.03	5590	1.02	6434	0.91
4768	-0.04	5593	1.03	6436	0.87
4770	-0.04	5595	1.05	6439	0.84
4773	-0.05	5598	1.07	6441	0.84
4873	-0.05	5600	1.09	6443	0.77
4875	-0.06	5603	1.11	6517	0.77
4880	-0.06	5605	1.13	6520	0.73
4883	-0.07	5608	1.15	6522	0.7
4885	-0.07	5610	1.17	6525	0.66
4888	-0.08	5612	1.18	6527	0.62
4893	-0.08	5615	1.19	6529	0.58
4895	-0.09	5617	1.2	6532	0.55
4976	-0.09	5620	1.21	6534	0.51
4979	-0.08	5622	1.21	6537	0.47
4981	-0.08	5625	1.23	6539	0.43
4984	-0.07	5627	1.24	6542	0.4
4991	-0.07	5630	1.25	6566	0.4
4993	-0.06	5632	1.26	6569	0.34
5072	-0.06	5634	1.27	6571	0.29
5075	-0.05	5732	1.27	6574	0.24
5084	-0.05	5734	1.26	6576	0.19
5087	-0.04	5739	1.26	6579	0.14
5094	-0.04	5742	1.25	6581	0.08
5097	-0.03	5749	1.25	6584	0.03
5107	-0.03	5752	1.24	6586	-0.02
5109	-0.02	5759	1.24	6589	-0.07
5200	-0.02	5761	1.23	6591	-0.12
5202	-0.03	5769	1.23	6665	-0.12
5210	-0.03	5771	1.22	6668	-0.15
5212	-0.04	5776	1.22	6670	-0.17
5340	-0.04	5779	1.21	6673	-0.2
5343	-0.03	5810	1.21	6675	-0.22
5345	-0.03	5813	1.2	6678	-0.24
5347	-0.02	5825	1.2	6680	-0.27
5352	-0.02	5828	1.19	6683	-0.29
5355	-0.01	5977	1.19	6685	-0.31
5357	0	5980	1.2	6687	-0.31
5360	0	5997	1.2	6690	-0.36
5362	0.01	5999	1.21	6692	-0.36
5414	0.01	6102	1.21	6695	-0.44
5416	0.05	6105	1.2	6697	-0.6
5419	0.05	6122	1.2	6700	-0.6
5421	0.12	6124	1.19	6702	-0.75
5424	0.15	6166	1.19	6705	-0.75
5426	0.19	6169	1.2	6707	-0.91
5429	0.22	6205	1.2	6710	-0.99
5431	0.26	6208	1.21	6712	-1.07
5434	0.29	6215	1.21	6715	-1.14
5436	0.33	6218	1.22	6839	-1.14
5438	0.36	6299	1.22	6841	-1.21
5512	0.36	6301	1.21	6844	-1.28
5515	0.41	6306	1.21	6846	-1.35
5517	0.47	6308	1.19	6849	-1.42
5519	0.52	6311	1.19	6851	-1.49
5522	0.57	6313	1.18	6854	-1.56
5524	0.62	6316	1.18	6856	-1.63
5527	0.68	6318	1.17	6859	-1.7
5529	0.73	6370	1.17	6861	-1.77
5532	0.78	6372	1.16	6864	-1.84
5534	0.84	6375	1.15	6866	-1.85
5537	0.89	6377	1.15	6964	-1.85
5561	0.89	6380	1.14	6966	-1.86
5564	0.9	6382	1.14	6969	-1.87
5566	0.91	6385	1.13	6971	-1.88
5568	0.92	6387	1.13	6974	-1.9
5571	0.92	6389	1.12	6976	-1.91
5573	0.93	6392	1.11	6979	-1.92
5576	0.94	6419	1.11	6981	-1.94
5578	0.95	6421	1.07	6984	-1.95
5581	0.96	6424	1.04	6986	-1.96
5583	0.97	6426	1.04	6989	-1.98

Distance (m)	Grade (%)	Distance (m)	Grade (%)	Distance (m)	Grade (%)
7115	-1.98	7949	0.75	8491	0.87
7117	-1.97	7952	0.74	8494	0.91
7128	-1.97	7954	0.72	8496	0.95
7130	-1.96	7956	0.72	8499	0.98
7138	-1.96	7959	0.7	8501	1.02
7140	-1.95	7961	0.68	8503	1.06
7295	-1.95	7964	0.67	8506	1.1
7298	-1.94	7966	0.66	8508	1.13
7323	-1.94	7969	0.64	8511	1.13
7326	-1.95	7971	0.63	8513	1.2
7336	-1.95	7973	0.62	8516	1.2
7339	-1.96	7976	0.61	8518	1.24
7451	-1.96	7983	0.61	8521	1.31
7454	-1.94	7986	0.6	8523	1.35
7456	-1.94	7988	0.59	8526	1.39
7459	-1.93	7993	0.59	8528	1.42
7461	-1.93	7995	0.58	8530	1.46
7464	-1.92	8051	0.58	8533	1.5
7466	-1.92	8054	0.57	8535	1.53
7469	-1.91	8144	0.57	8538	1.57
7471	-1.9	8147	0.58	8611	1.57
7474	-1.9	8149	0.58	8614	1.64
7477	-1.89	8152	0.59	8616	1.7
7479	-1.88	8154	0.6	8618	1.77
7482	-1.87	8157	0.6	8621	1.83
7484	-1.87	8159	0.61	8623	1.9
7487	-1.86	8162	0.62	8626	1.97
7489	-1.85	8164	0.63	8628	2.03
7492	-1.84	8167	0.63	8631	2.1
7494	-1.83	8169	0.64	8633	2.16
7574	-1.83	8248	0.64	8635	2.23
7576	-1.78	8250	0.65	8662	2.23
7579	-1.72	8265	0.65	8665	2.25
7581	-1.67	8267	0.66	8667	2.27
7584	-1.62	8270	0.65	8670	2.3
7587	-1.57	8272	0.64	8672	2.32
7589	-1.52	8275	0.63	8674	2.34
7592	-1.47	8277	0.63	8677	2.36
7594	-1.42	8280	0.62	8679	2.37
7597	-1.37	8282	0.61	8682	2.39
7599	-1.32	8285	0.61	8684	2.41
7651	-1.32	8287	0.6	8711	2.41
7653	-1.26	8290	0.59	8713	2.39
7656	-1.2	8393	0.59	8716	2.35
7658	-1.14	8395	0.6	8718	2.34
7661	-1.08	8398	0.61	8721	2.32
7663	-1.02	8400	0.61	8723	2.3
7666	-0.96	8403	0.62	8725	2.28
7668	-0.9	8405	0.63	8728	2.26
7671	-0.84	8408	0.64	8730	2.26
7673	-0.78	8410	0.65	8733	2.24
7676	-0.72	8413	0.66	8735	2.22
7679	-0.64	8440	0.66	8805	2.22
7681	-0.56	8442	0.67	8808	2.16
7684	-0.47	8444	0.68	8810	2.16
7686	-0.39	8447	0.69	8812	2.05
7689	-0.31	8449	0.7	8815	2.05
7691	-0.22	8452	0.71	8817	1.93
7694	-0.14	8454	0.72	8820	1.87
7696	-0.06	8457	0.72	8822	1.81
7699	0.03	8459	0.73	8824	1.75
7701	0.11	8462	0.73	8827	1.69
7827	0.11	8464	0.75	8829	1.69
7829	0.17	8467	0.76	8831	1.64
7832	0.24	8469	0.77	8901	1.64
7834	0.3	8472	0.78	8903	1.62
7837	0.3	8474	0.79	8905	1.62
7839	0.43	8476	0.79	8908	1.57
7841	0.49	8479	0.8	8910	1.55
7844	0.56	8481	0.81	8913	1.53
7846	0.62	8484	0.82	8915	1.51
7849	0.69	8486	0.83	8917	1.49
7851	0.75	8489	0.84	8920	1.47

Distance (m)	Grade (%)	Distance (m)	Grade (%)	Distance (m)	Grade (%)
8922	1.45	10013	0.94	10383	-0.34
8925	1.43	10015	0.93	10385	-0.36
8927	1.43	10018	0.93	10387	-0.38
8930	1.41	10020	0.92	10390	-0.39
8932	1.39	10025	0.92	10392	-0.39
8934	1.36	10028	0.91	10395	-0.43
8937	1.36	10050	0.91	10397	-0.45
8939	1.32	10052	0.9	10400	-0.48
8942	1.32	10055	0.89	10402	-0.5
8944	1.29	10057	0.89	10405	-0.5
8946	1.27	10060	0.88	10407	-0.55
8949	1.25	10062	0.87	10410	-0.58
8951	1.23	10065	0.86	10412	-0.6
8954	1.22	10067	0.85	10415	-0.63
8956	1.2	10070	0.84	10417	-0.65
8959	1.18	10072	0.83	10420	-0.68
8961	1.16	10074	0.82	10422	-0.68
8963	1.15	10148	0.82	10425	-0.69
8966	1.13	10151	0.81	10427	-0.7
8968	1.11	10153	0.79	10429	-0.7
8971	1.09	10156	0.77	10432	-0.71
8973	1.07	10158	0.76	10434	-0.72
9056	1.07	10161	0.74	10437	-0.72
9059	1.06	10163	0.72	10439	-0.73
9066	1.06	10165	0.71	10442	-0.73
9069	1.05	10168	0.69	10444	-0.74
9076	1.05	10170	0.68	10494	-0.74
9079	1.04	10173	0.66	10496	-0.75
9086	1.04	10175	0.66	10499	-0.76
9088	1.03	10178	0.63	10501	-0.77
9093	1.03	10180	0.61	10504	-0.78
9096	1.02	10183	0.59	10506	-0.79
9304	1.02	10185	0.58	10509	-0.8
9306	1.01	10188	0.56	10511	-0.8
9348	1.01	10190	0.55	10514	-0.81
9350	1	10192	0.53	10516	-0.81
9487	1	10195	0.51	10519	-0.82
9490	0.99	10197	0.5	10521	-0.83
9500	0.99	10200	0.49	10583	-0.83
9502	0.98	10202	0.47	10585	-0.82
9547	0.98	10205	0.46	10605	-0.82
9549	0.97	10207	0.45	10608	-0.81
9610	0.97	10210	0.44	10667	-0.81
9613	0.96	10212	0.42	10669	-0.82
9706	0.96	10215	0.41	10672	-0.82
9709	0.97	10217	0.4	10674	-0.83
9711	0.98	10220	0.39	10677	-0.83
9714	0.99	10222	0.38	10679	-0.84
9716	1	10224	0.38	10682	-0.84
9719	1	10227	0.35	10684	-0.85
9721	1.01	10229	0.34	10687	-0.86
9723	1.02	10232	0.33	10689	-0.86
9726	1.03	10234	0.32	10692	-0.87
9728	1.04	10237	0.3	10716	-0.87
9731	1.05	10239	0.29	10719	-0.9
9765	1.05	10242	0.28	10721	-0.92
9768	1.06	10244	0.27	10724	-0.95
9773	1.06	10247	0.26	10726	-0.98
9775	1.07	10249	0.21	10729	-1
9927	1.07	10252	0.21	10731	-1
9930	1.06	10254	0.1	10734	-1.06
9932	1.05	10256	0.05	10736	-1.08
9934	1.04	10259	0	10739	-1.11
9937	1.03	10261	-0.05	10741	-1.11
9939	1.02	10264	-0.1	10744	-1.14
9942	1	10266	-0.15	10840	-1.14
9944	0.99	10269	-0.2	10843	-1.18
9947	0.98	10271	-0.25	10845	-1.18
9949	0.98	10370	-0.25	10848	-1.28
9952	0.96	10373	-0.27	10850	-1.33
10006	0.96	10375	-0.29	10853	-1.38
10008	0.95	10378	-0.3	10855	-1.43
10011	0.95	10380	-0.3	10858	-1.47

Distance (m)	Grade (%)	Distance (m)	Grade (%)	Distance (m)	Grade (%)
10860	-1.52	11559	-1.45	12104	-1.79
10863	-1.57	11561	-1.43	12129	-1.79
10865	-1.62	11564	-1.42	12131	-1.8
10890	-1.62	11567	-1.4	12134	-1.8
10892	-1.64	11569	-1.38	12136	-1.81
10895	-1.66	11572	-1.36	12139	-1.81
10897	-1.68	11574	-1.35	12141	-1.82
10900	-1.7	11625	-1.35	12144	-1.82
10902	-1.72	11628	-1.34	12146	-1.83
10905	-1.74	11630	-1.34	12149	-1.84
10907	-1.76	11633	-1.33	12151	-1.84
10910	-1.78	11635	-1.33	12154	-1.85
10912	-1.8	11638	-1.32	12157	-1.85
10915	-1.82	11643	-1.32	12159	-1.86
10917	-1.84	11645	-1.31	12162	-1.86
10920	-1.85	11648	-1.31	12164	-1.87
10922	-1.87	11650	-1.3	12167	-1.88
10925	-1.89	11653	-1.3	12169	-1.88
10927	-1.91	11655	-1.29	12172	-1.89
10930	-1.93	11658	-1.29	12174	-1.89
10932	-1.95	11660	-1.28	12177	-1.9
10935	-1.97	11666	-1.28	12179	-1.91
10937	-1.99	11668	-1.27	12281	-1.91
10940	-2.01	11671	-1.27	12283	-1.9
11040	-2.01	11673	-1.26	12286	-1.9
11043	-2	11746	-1.26	12288	-1.89
11048	-2	11749	-1.27	12293	-1.89
11050	-1.98	11779	-1.27	12296	-1.88
11055	-1.98	11782	-1.28	12298	-1.88
11058	-1.97	11880	-1.28	12301	-1.87
11060	-1.96	11882	-1.29	12303	-1.87
11063	-1.96	11887	-1.29	12306	-1.86
11065	-1.95	11890	-1.3	12380	-1.86
11124	-1.95	11895	-1.3	12382	-1.87
11126	-1.94	11897	-1.31	12390	-1.87
11139	-1.94	11902	-1.31	12392	-1.88
11141	-1.93	11905	-1.32	12397	-1.88
11169	-1.93	11908	-1.33	12400	-1.89
11172	-1.94	11910	-1.33	12408	-1.89
11286	-1.94	11913	-1.34	12410	-1.9
11289	-1.95	11915	-1.35	12418	-1.9
11306	-1.95	11918	-1.35	12420	-1.91
11309	-1.96	11920	-1.36	12425	-1.91
11327	-1.96	11923	-1.36	12428	-1.92
11329	-1.95	11925	-1.37	12435	-1.92
11334	-1.95	11928	-1.38	12438	-1.93
11337	-1.94	11933	-1.38	12446	-1.93
11396	-1.94	11935	-1.39	12448	-1.94
11398	-1.92	11943	-1.39	12453	-1.94
11401	-1.91	11945	-1.4	12456	-1.95
11403	-1.89	11950	-1.4	12463	-1.95
11406	-1.88	11953	-1.41	12466	-1.96
11408	-1.87	12003	-1.41	12474	-1.96
11411	-1.85	12006	-1.43	12476	-1.97
11413	-1.84	12008	-1.45	12481	-1.97
11416	-1.83	12011	-1.48	12484	-1.98
11419	-1.81	12013	-1.5	12509	-1.98
11421	-1.8	12016	-1.52	12512	-1.96
11472	-1.8	12018	-1.55	12514	-1.95
11475	-1.77	12021	-1.57	12517	-1.93
11477	-1.74	12023	-1.59	12519	-1.92
11480	-1.72	12026	-1.61	12522	-1.9
11482	-1.72	12028	-1.64	12525	-1.89
11485	-1.66	12078	-1.64	12527	-1.87
11488	-1.63	12081	-1.65	12530	-1.86
11490	-1.6	12083	-1.67	12532	-1.84
11493	-1.58	12086	-1.68	12535	-1.83
11495	-1.55	12088	-1.68	12611	-1.83
11498	-1.52	12091	-1.71	12614	-1.8
11549	-1.52	12094	-1.73	12616	-1.77
11551	-1.5	12096	-1.74	12619	-1.75
11554	-1.49	12099	-1.76	12621	-1.72
11556	-1.47	12101	-1.77	12624	-1.69

Distance (m)	Grade (%)	Distance (m)	Grade (%)	Distance (m)	Grade (%)
12626	-1.66	13177	1.42	14526	-0.94
12629	-1.63	13295	1.42	14528	-0.98
12632	-1.61	13297	1.43	14531	-1.03
12634	-1.58	13332	1.43	14533	-1.07
12637	-1.55	13334	1.42	14536	-1.12
12639	-1.52	13408	1.42	14538	-1.16
12642	-1.49	13410	1.41	14541	-1.21
12644	-1.47	13504	1.41	14543	-1.25
12647	-1.44	13506	1.4	14546	-1.3
12649	-1.41	13759	1.4	14548	-1.34
12652	-1.38	13761	1.41	14551	-1.39
12655	-1.35	13864	1.41	14678	-1.39
12657	-1.33	13867	1.42	14680	-1.38
12660	-1.3	13882	1.42	14685	-1.38
12662	-1.27	13884	1.43	14687	-1.37
12665	-1.18	13896	1.43	14695	-1.37
12667	-1.09	13899	1.44	14697	-1.36
12670	-0.99	13909	1.44	14802	-1.36
12672	-0.9	13911	1.45	14805	-1.35
12675	-0.81	14029	1.45	14807	-1.35
12677	-0.72	14031	1.44	14810	-1.34
12680	-0.62	14036	1.44	14815	-1.34
12683	-0.53	14039	1.45	14817	-1.33
12685	-0.44	14044	1.45	14820	-1.33
12688	-0.35	14046	1.46	14823	-1.32
12791	-0.35	14051	1.46	14828	-1.32
12793	-0.16	14053	1.47	14830	-1.31
12796	-0.06	14058	1.47	14835	-1.31
12798	0.03	14061	1.48	14838	-1.3
12801	0.13	14159	1.48	14843	-1.3
12803	0.22	14161	1.46	14845	-1.29
12806	0.31	14164	1.44	15028	-1.29
12808	0.41	14166	1.42	15031	-1.3
12811	0.5	14169	1.4	15038	-1.3
12813	0.6	14171	1.38	15041	-1.31
12816	0.66	14174	1.36	15048	-1.31
12818	0.72	14176	1.34	15051	-1.32
12821	0.79	14178	1.33	15076	-1.32
12823	0.85	14181	1.31	15078	-1.33
12826	0.91	14183	1.29	15081	-1.33
12828	0.97	14208	1.29	15083	-1.34
12831	1.04	14210	1.26	15086	-1.35
12833	1.1	14213	1.23	15088	-1.36
12836	1.1	14215	1.19	15091	-1.37
12838	1.22	14218	1.16	15093	-1.38
12888	1.22	14220	1.13	15096	-1.39
12890	1.25	14223	1.1	15098	-1.4
12893	1.27	14225	1.07	15226	-1.4
12895	1.29	14228	1.04	15229	-1.38
12898	1.31	14230	1	15231	-1.36
12900	1.33	14232	0.97	15234	-1.34
12902	1.35	14257	0.97	15236	-1.32
12905	1.37	14259	0.91	15239	-1.3
12907	1.39	14262	0.85	15241	-1.27
12910	1.41	14264	0.78	15244	-1.25
12912	1.43	14267	0.72	15246	-1.23
12999	1.43	14269	0.66	15249	-1.21
13001	1.42	14272	0.59	15251	-1.19
13032	1.42	14274	0.53	15352	-1.19
13035	1.41	14277	0.47	15354	-1.1
13039	1.41	14279	0.4	15357	-1
13042	1.4	14282	0.34	15359	-0.91
13044	1.4	14379	0.34	15362	-0.82
13047	1.39	14381	0.21	15364	-0.73
13049	1.39	14384	0.08	15367	-0.64
13051	1.38	14386	-0.04	15369	-0.55
13158	1.38	14389	-0.17	15372	-0.46
13160	1.39	14391	-0.3	15374	-0.37
13163	1.39	14393	-0.43	15377	-0.28
13165	1.4	14396	-0.56	15379	-0.2
13167	1.4	14398	-0.68	15382	-0.12
13170	1.41	14401	-0.81	15384	-0.04
13175	1.41	14403	-0.94	15387	0.03



Distance (m)	Grade (%)	Distance (m)	Grade (%)	Distance (m)	Grade (%)
15389 .....	0.11	16269 .....	1.9	16936 .....	0.77
15392 .....	0.19	16276 .....	1.9	16939 .....	0.76
15394 .....	0.26	16279 .....	1.91	17012 .....	0.76
15397 .....	0.34	16328 .....	1.91	17015 .....	0.77
15399 .....	0.42	16330 .....	1.9	17062 .....	0.77
15402 .....	0.49	16333 .....	1.89	17064 .....	0.78
15501 .....	0.49	16335 .....	1.88	17081 .....	0.78
15503 .....	0.59	16338 .....	1.87	17084 .....	0.79
15506 .....	0.69	16340 .....	1.86	17103 .....	0.79
15508 .....	0.79	16342 .....	1.85	17106 .....	0.8
15511 .....	0.89	16345 .....	1.85	17153 .....	0.8
15513 .....	0.99	16347 .....	1.84	17155 .....	0.81
15516 .....	1.08	16350 .....	1.83	17177 .....	0.81
15518 .....	1.18	16352 .....	1.82	17180 .....	0.82
15521 .....	1.28	16377 .....	1.82	17266 .....	0.82
15523 .....	1.38	16379 .....	1.79	17268 .....	0.81
15525 .....	1.48	16382 .....	1.77	17278 .....	0.81
15598 .....	1.48	16384 .....	1.75	17280 .....	0.8
15601 .....	1.51	16387 .....	1.72	17293 .....	0.8
15603 .....	1.55	16389 .....	1.7	17295 .....	0.79
15606 .....	1.58	16392 .....	1.68	17408 .....	0.79
15608 .....	1.62	16394 .....	1.65	17410 .....	0.77
15610 .....	1.65	16396 .....	1.63	17413 .....	0.76
15613 .....	1.68	16399 .....	1.61	17415 .....	0.75
15615 .....	1.72	16401 .....	1.58	17418 .....	0.74
15618 .....	1.75	16500 .....	1.58	17420 .....	0.74
15620 .....	1.79	16502 .....	1.54	17423 .....	0.73
15623 .....	1.82	16504 .....	1.5	17425 .....	0.72
15625 .....	1.83	16507 .....	1.45	17428 .....	0.71
15627 .....	1.85	16509 .....	1.41	17430 .....	0.7
15630 .....	1.85	16512 .....	1.36	17455 .....	0.7
15632 .....	1.87	16514 .....	1.32	17457 .....	0.68
15635 .....	1.88	16517 .....	1.27	17460 .....	0.66
15637 .....	1.89	16519 .....	1.23	17462 .....	0.64
15639 .....	1.91	16522 .....	1.19	17464 .....	0.62
15642 .....	1.92	16524 .....	1.14	17467 .....	0.59
15644 .....	1.93	16527 .....	1.11	17469 .....	0.57
15647 .....	1.94	16529 .....	1.08	17472 .....	0.55
15721 .....	1.94	16531 .....	1.05	17474 .....	0.53
15723 .....	1.93	16534 .....	1.02	17477 .....	0.51
15726 .....	1.93	16536 .....	1	17479 .....	0.49
15728 .....	1.92	16539 .....	0.97	17528 .....	0.49
15730 .....	1.92	16541 .....	0.94	17531 .....	0.43
15733 .....	1.91	16544 .....	0.91	17533 .....	0.37
15738 .....	1.91	16546 .....	0.88	17536 .....	0.31
15740 .....	1.9	16549 .....	0.85	17538 .....	0.31
15742 .....	1.9	16625 .....	0.85	17541 .....	0.18
15745 .....	1.89	16627 .....	0.84	17543 .....	0.12
15747 .....	1.89	16630 .....	0.83	17546 .....	0.06
15749 .....	1.88	16632 .....	0.81	17548 .....	0
15752 .....	1.88	16634 .....	0.79	17551 .....	-0.06
15754 .....	1.87	16637 .....	0.79	17553 .....	-0.12
15757 .....	1.87	16639 .....	0.77	17649 .....	-0.12
15759 .....	1.86	16642 .....	0.75	17652 .....	-0.13
15761 .....	1.86	16644 .....	0.74	17654 .....	-0.27
15764 .....	1.85	16649 .....	0.74	17657 .....	-0.42
15773 .....	1.85	16651 .....	0.73	17659 .....	-0.42
15776 .....	1.84	16678 .....	0.73	17662 .....	-0.71
15783 .....	1.84	16680 .....	0.74	17664 .....	-0.86
15785 .....	1.83	16692 .....	0.74	17667 .....	-1
15867 .....	1.83	16695 .....	0.75	17669 .....	-1.15
15870 .....	1.84	16772 .....	0.75	17672 .....	-1.29
15877 .....	1.84	16774 .....	0.76	17674 .....	-1.44
15879 .....	1.85	16777 .....	0.76	17677 .....	-1.58
15962 .....	1.85	16779 .....	0.77	17801 .....	-1.58
15965 .....	1.86	16782 .....	0.77	17803 .....	-1.61
15977 .....	1.86	16784 .....	0.78	17806 .....	-1.64
15979 .....	1.87	16789 .....	0.78	17808 .....	-1.67
16141 .....	1.87	16791 .....	0.79	17811 .....	-1.69
16144 .....	1.88	16897 .....	0.79	17813 .....	-1.72
16259 .....	1.88	16899 .....	0.78	17816 .....	-1.75
16262 .....	1.89	16919 .....	0.78	17818 .....	-1.78
16266 .....	1.89	16921 .....	0.77	17821 .....	-1.81

Distance (m)	Grade (%)	Distance (m)	Grade (%)	Distance (m)	Grade (%)
17823	-1.83	18434	-2.04	19016	-0.18
17826	-1.86	18437	-2.04	19019	-0.1
17851	-1.86	18439	-2.03	19021	-0.02
17854	-1.87	18442	-2.02	19024	0.06
17856	-1.88	18445	-2.02	19124	0.06
17859	-1.89	18447	-2.01	19127	0.08
17861	-1.89	18450	-2.01	19129	0.1
17864	-1.9	18452	-2	19132	0.13
17866	-1.91	18455	-1.99	19134	0.15
17869	-1.92	18457	-1.99	19137	0.17
17871	-1.92	18460	-1.98	19139	0.19
17874	-1.93	18463	-1.98	19142	0.22
17876	-1.94	18465	-1.97	19144	0.24
17879	-1.93	18468	-1.96	19146	0.26
17884	-1.93	18470	-1.96	19149	0.28
17886	-1.91	18473	-1.95	19198	0.28
17889	-1.91	18475	-1.94	19201	0.29
17891	-1.9	18478	-1.94	19203	0.29
17894	-1.89	18480	-1.93	19206	0.3
17896	-1.88	18483	-1.93	19211	0.3
17899	-1.88	18486	-1.92	19213	0.31
17901	-1.87	18591	-1.92	19218	0.31
18028	-1.87	18593	-1.91	19220	0.32
18030	-1.85	18596	-1.91	19267	0.32
18033	-1.83	18598	-1.9	19269	0.33
18035	-1.83	18603	-1.9	19345	0.33
18038	-1.79	18606	-1.89	19348	0.32
18040	-1.77	18609	-1.89	19357	0.32
18043	-1.75	18611	-1.88	19360	0.31
18045	-1.73	18724	-1.88	19372	0.31
18048	-1.71	18727	-1.89	19374	0.3
18051	-1.69	18737	-1.89	19384	0.3
18053	-1.67	18739	-1.9	19387	0.29
18180	-1.67	18768	-1.9	19423	0.29
18182	-1.69	18770	-1.89	19426	0.28
18185	-1.7	18775	-1.89	19473	0.28
18188	-1.71	18778	-1.88	19475	0.29
18190	-1.72	18783	-1.88	19492	0.29
18193	-1.74	18786	-1.87	19495	0.3
18195	-1.75	18791	-1.87	19615	0.3
18198	-1.76	18793	-1.86	19618	0.31
18200	-1.78	18801	-1.86	19620	0.32
18203	-1.79	18804	-1.85	19623	0.33
18205	-1.8	18809	-1.85	19625	0.34
18231	-1.8	18811	-1.84	19628	0.35
18233	-1.81	18816	-1.84	19630	0.35
18236	-1.83	18819	-1.83	19632	0.36
18238	-1.84	18845	-1.83	19635	0.37
18241	-1.85	18847	-1.78	19637	0.38
18243	-1.87	18850	-1.72	19640	0.39
18246	-1.88	18852	-1.67	19682	0.39
18248	-1.89	18855	-1.61	19684	0.4
18251	-1.91	18858	-1.55	19704	0.4
18254	-1.92	18860	-1.5	19706	0.41
18256	-1.93	18863	-1.44	19731	0.41
18307	-1.93	18865	-1.39	19733	0.42
18309	-1.95	18868	-1.33	19817	0.42
18312	-1.96	18870	-1.28	19819	0.41
18315	-1.98	18978	-1.28	19822	0.41
18317	-1.99	18980	-1.17	19824	0.4
18320	-2	18983	-1.05	19827	0.4
18322	-2.02	18985	-1	19829	0.39
18325	-2.03	18988	-0.94	19832	0.39
18327	-2.05	18991	-0.89	19834	0.38
18330	-2.06	18993	-0.83	19937	0.38
18332	-2.08	18996	-0.78	19940	0.39
18411	-2.08	18998	-0.72	19942	0.39
18414	-2.07	19001	-0.72	19945	0.4
18416	-2.07	19003	-0.64	19947	0.4
18419	-2.06	19006	-0.49	19949	0.41
18424	-2.06	19008	-0.41	19954	0.41
18427	-2.05	19011	-0.33	19957	0.42
18432	-2.05	19013	-0.25	20058	0.42

Distance (m)	Grade (%)
20060 .....	0.41
20063 .....	0.39
20065 .....	0.38
20067 .....	0.37
20070 .....	0.35
20072 .....	0.34
20075 .....	0.32
20077 .....	0.31
20080 .....	0.3
20082 .....	0.28
20156 .....	0.28
20158 .....	0
20193 .....	0

## PART 1039—CONTROL OF EMISSIONS FROM NEW AND IN-USE NONROAD COMPRESSION-IGNITION ENGINES

■ 117. The authority citation for part 1039 continues to read as follows:

Authority: 42 U.S.C. 7401–7671q.

### Subpart A—Overview and Applicability

■ 118. Section 1039.2 is revised to read as follows:

#### § 1039.2 Who is responsible for compliance?

The regulations in this part 1039 contain provisions that affect both manufacturers and others. However, the requirements of this part are generally addressed to the manufacturer. The term “you” generally means the manufacturer, as defined in § 1039.801, especially for issues related to certification. Note that for engines that become new after being placed into service (such as engines converted from highway or stationary use), the requirements that normally apply for manufacturers of freshly manufactured engines apply to the importer or any other entity we allow to obtain a certificate of conformity.

■ 119. Section 1039.5 is amended by revising the introductory text, adding paragraph (a)(2)(iii), and revising paragraph (e) to read as follows:

#### § 1039.5 Which engines are excluded from this part’s requirements?

This part does not apply to certain nonroad engines, as follows:

- (a) \* \* \*
- (2) \* \* \*

(iii) Locomotive engines produced under the provisions of 40 CFR 1033.625.

\* \* \* \* \*

(e) *Engines used in recreational vehicles.* Engines certified to meet the requirements of 40 CFR part 1051 are not subject to the provisions of this part 1039.

■ 120. Section 1039.30 is revised to read as follows:

#### § 1039.30 Submission of information.

Unless we specify otherwise, send all reports and requests for approval to the Designated Compliance Officer (see § 1039.801). See § 1039.825 for additional reporting and recordkeeping provisions.

### Subpart B—Emission Standards and Related Requirements

■ 121. Section 1039.102 is amended by revising paragraph (e)(3) to read as follows:

#### § 1039.102 What exhaust emission standards and phase-in allowances apply for my engines in model year 2014 and earlier?

\* \* \* \* \*

(e) \* \* \*

(3) You may use NO<sub>x</sub> + NMHC emission credits to certify an engine family to the alternate NO<sub>x</sub> + NMHC standards in this paragraph (e)(3) instead of the otherwise applicable alternate NO<sub>x</sub> and NMHC standards. Calculate the alternate NO<sub>x</sub> + NMHC standard by adding 0.1 g/kW-hr to the numerical value of the applicable alternate NO<sub>x</sub> standard of paragraph (e)(1) or (2) of this section. Engines certified to the NO<sub>x</sub> + NMHC standards of this paragraph (e)(3) may not generate emission credits. The FEL caps for engine families certified under this paragraph (e)(3) are the previously applicable NO<sub>x</sub> + NMHC standards of 40 CFR 89.112 (generally the Tier 3 standards).

\* \* \* \* \*

■ 122. Section 1039.104 is amended by revising paragraph (g)(5) and adding paragraph (i) to read as follows:

#### § 1039.104 Are there interim provisions that apply only for a limited time?

\* \* \* \* \*

(g) \* \* \*

(5) You may certify engines under this paragraph (g) in any model year provided for in Table 1 of this section without regard to whether or not the engine family’s FEL is at or below the otherwise applicable FEL cap. For example, a 200 kW engine certified to the NO<sub>x</sub> + NMHC standard of § 1039.102(e)(3) with an FEL equal to the FEL cap of 4.0 g/kW-hr may nevertheless be certified under this paragraph (g).

\* \* \* \* \*

(i) *Lead time for diagnostic controls.* Model year 2017 and earlier engines are not subject to the requirements for diagnostic controls specified in § 1039.110.

\* \* \* \* \*

■ 123. Section 1039.107 is amended by revising paragraph (b)(2) to read as follows:

#### § 1039.107 What evaporative emission standards and requirements apply?

\* \* \* \* \*

(b) \* \* \*

(2) Present test data to show that equipment using your engines meets the evaporative emission standards we specify in this section if you do not use design-based certification under 40 CFR 1048.245.

■ 124. Section 1039.110 is added to subpart B to read as follows:

#### § 1039.110 Recording reductant use and other diagnostic functions.

(a) Engines equipped with SCR systems using a reductant other than the engine’s fuel must have a diagnostic system that monitors reductant quality and tank levels and alert operators to the need to refill the reductant tank before it is empty, or to replace the reductant if it does not meet your concentration specifications. Unless we approve other alerts, use a warning lamp or an audible alarm. You do not need to separately monitor reductant quality if you include an exhaust NO<sub>x</sub> sensor (or other sensor) that allows you to determine inadequate reductant quality. However, tank level must be monitored in all cases.

(b) You may equip your engine with other diagnostic features. If you do, they must be designed to allow us to read and interpret the codes. Note that § 1039.205 requires you to provide us any information needed to read, record, and interpret all the information broadcast by an engine’s onboard computers and electronic control units.

■ 125. Section 1039.120 is amended by revising paragraph (b) introductory text to read as follows:

#### § 1039.120 What emission-related warranty requirements apply to me?

\* \* \* \* \*

(b) *Warranty period.* Your emission-related warranty must be valid for at least as long as the minimum warranty periods listed in this paragraph (b) in hours of operation and years, whichever comes first. You may offer an emission-related warranty more generous than we require. The emission-related warranty for the engine may not be shorter than any basic mechanical warranty you provide without charge for the engine. Similarly, the emission-related warranty for any component may not be shorter than any warranty you provide without charge for that component. This means that your warranty may not treat emission-related and nonemission-related defects differently for any

component. If an engine has no hour meter, we base the warranty periods in this paragraph (b) only on the engine's age (in years). The warranty period begins when the engine is placed into service. The minimum warranty periods are shown in the following table:

\* \* \* \* \*

■ 126. Section 1039.125 is amended by revising paragraphs (a)(2)(i), (a)(3)(i), (c), and (e) to read as follows:

**§ 1039.125 What maintenance instructions must I give to buyers?**

\* \* \* \* \*

(a) \* \* \*

(2) \* \* \*

(i) For EGR-related filters and coolers, DEF filters, PCV valves, crankcase vent filters, and fuel injector tips (cleaning only), the minimum interval is 1,500 hours.

\* \* \* \* \*

(3) \* \* \*

(i) For EGR-related filters and coolers, DEF filters, PCV valves, crankcase vent filters, and fuel injector tips (cleaning only), the minimum interval is 1,500 hours.

\* \* \* \* \*

(c) *Special maintenance.* You may specify more frequent maintenance to address problems related to special situations, such as atypical engine operation. You must clearly state that this additional maintenance is associated with the special situation you are addressing. You may also address maintenance of low-use engines (such as recreational or stand-by engines) by specifying the maintenance interval in terms of calendar months or years in addition to your specifications in terms of engine operating hours. All special maintenance instructions must be consistent with good engineering judgment. We may disapprove your maintenance instructions if we determine that you have specified special maintenance steps to address maintenance that is unlikely to occur in use, or engine operation that is not atypical. For example, this paragraph (c) does not allow you to design engines that require special maintenance for a certain type of expected operation. If we determine that certain maintenance items do not qualify as special maintenance under this paragraph (c), you may identify this as recommended additional maintenance under paragraph (b) of this section.

\* \* \* \* \*

(e) *Maintenance that is not emission-related.* For maintenance unrelated to emission controls, you may schedule any amount of inspection or maintenance. You may also take these

inspection or maintenance steps during service accumulation on your emission-data engines, as long as they are reasonable and technologically necessary. This might include adding engine oil, changing air, fuel, or oil filters, servicing engine-cooling systems or fuel-water separator cartridges or elements, and adjusting idle speed, governor, engine bolt torque, valve lash, or injector lash. You may not perform this nonemission-related maintenance on emission-data engines more often than the least frequent intervals that you recommend to the ultimate purchaser.

\* \* \* \* \*

■ 127. Section 1039.130 is amended by adding paragraph (b)(4) and revising paragraph (b)(5) to read as follows:

**§ 1039.130 What installation instructions must I give to equipment manufacturers?**

\* \* \* \* \*

(b) \* \* \*

(4) Describe any necessary steps for installing the diagnostic system described in § 1039.110.

(5) Describe how your certification is limited for any type of application. For example, if your engines are certified only for constant-speed operation, tell equipment manufacturers not to install the engines in variable-speed applications.

\* \* \* \* \*

■ 128. Section 1039.135 is amended by revising paragraphs (c)(2) and (d) to read as follows:

**§ 1039.135 How must I label and identify the engines I produce?**

\* \* \* \* \*

(c) \* \* \*

(2) Include your full corporate name and trademark. You may identify another company and use its trademark instead of yours if you comply with the branding provisions of 40 CFR 1068.45.

\* \* \* \* \*

(d) You may add information to the emission control information label as follows:

(1) If your emission control information label includes all the information described in paragraphs (c)(5) through (10) of this section, you may identify other emission standards that the engine meets or does not meet (such as international standards). You may include this information by adding it to the statement we specify or by including a separate statement.

(2) You may add other information to ensure that the engine will be properly maintained and used.

(3) You may add appropriate features to prevent counterfeit labels. For example, you may include the engine's

unique identification number on the label.

\* \* \* \* \*

**Subpart C—Certifying Engine Families**

■ 129. Section 1039.201 is amended by revising paragraphs (a) and (g) to read as follows:

**§ 1039.201 What are the general requirements for obtaining a certificate of conformity?**

(a) You must send us a separate application for a certificate of conformity for each engine family. A certificate of conformity is valid for new production from the indicated effective date until the end of the model year for which it is issued, which may not extend beyond December 31 of that year. No new certificate will be issued after December 31 of the model year. You may amend your application for certification after the end of the model year in certain circumstances as described in §§ 1039.220 and 1039.225. You must renew your certification annually for any engines you continue to produce.

\* \* \* \* \*

(g) We may require you to deliver your test engines to a facility we designate for our testing (see § 1039.235(c)). Alternatively, you may choose to deliver another engine that is identical in all material respects to the test engine, or another engine that we determine can appropriately serve as an emission-data engine for the engine family.

\* \* \* \* \*

■ 130. Section 1039.205 is amended by revising paragraph (r)(1) and adding paragraph (bb) to read as follows:

**§ 1039.205 What must I include in my application?**

\* \* \* \* \*

(r) \* \* \*

(1) Report all valid test results involving measurement of pollutants for which emission standards apply. Also indicate whether there are test results from invalid tests or from any other tests of the emission-data engine, whether or not they were conducted according to the test procedures of subpart F of this part. We may require you to report these additional test results. We may ask you to send other information to confirm that your tests were valid under the requirements of this part and 40 CFR part 1065.

\* \* \* \* \*

(bb) For imported engines or equipment, identify the following:

(1) Describe your normal practice for importing engines. For example, this

may include identifying the names and addresses of any agents you have authorized to import your engines.

(2) For engines below 560 kW, identify a test facility in the United States where you can test your engines if we select them for testing under a selective enforcement audit, as specified in 40 CFR part 1068, subpart E.

■ 131. Section 1039.220 is amended by revising the section heading as to read as follows:

**§ 1039.220 How do I amend my maintenance instructions?**

\* \* \* \* \*

■ 132. Section 1039.225 is amended by revising the introductory text and adding paragraph (b)(4) to read as follows:

**§ 1039.225 How do I amend my application for certification?**

Before we issue you a certificate of conformity, you may amend your application to include new or modified engine configurations, subject to the provisions of this section. After we have issued your certificate of conformity, but before the end of the model year, you may send us an amended application requesting that we include new or modified engine configurations within the scope of the certificate, subject to the provisions of this section. Before the end of the model year, you must amend your application if any changes occur with respect to any information that is included or should be included in your application. After the end of the model year, you may amend your application only to update maintenance instructions as described in § 1039.220 or to modify an FEL as described in paragraph (f) of this section.

\* \* \* \* \*

(b) \* \* \*

(4) Include any other information needed to make your application correct and complete.

\* \* \* \* \*

■ 133. Section 1039.230 is amended by revising paragraph (b)(1) to read as follows:

**§ 1039.230 How do I select engine families?**

\* \* \* \* \*

(b) \* \* \*

(1) The combustion cycle and fuel. However, you do not need to separate dual-fuel and flexible-fuel engines into separate engine families.

\* \* \* \* \*

■ 134. Section 1039.235 is amended by revising paragraphs (a), (b), (c)(4), and (d)(1) to read as follows:

**§ 1039.235 What testing requirements apply for certification?**

\* \* \* \* \*

(a) Select an emission-data engine from each engine family for testing. Select the engine configuration with the highest volume of fuel injected per cylinder per combustion cycle at the point of maximum torque—unless good engineering judgment indicates that a different engine configuration is more likely to exceed (or have emissions nearer to) an applicable emission standard or FEL. If two or more engines have the same fueling rate at maximum torque, select the one with the highest fueling rate at rated speed. In making this selection, consider all factors expected to affect emission-control performance and compliance with the standards, including emission levels of all exhaust constituents, especially NO<sub>x</sub> and PM.

(b) Test your emission-data engines using the procedures and equipment specified in subpart F of this part. In the case of dual-fuel engines, measure emissions when operating with each type of fuel for which you intend to certify the engine. In the case of flexible-fuel engines, measure emissions when operating with the fuel mixture that best represents in-use operation or is most likely to have the highest NO<sub>x</sub> emissions (or NO<sub>x</sub>+NMHC emissions for engines subject to NO<sub>x</sub>+NMHC standards), though you may ask us instead to perform tests with both fuels separately if you can show that intermediate mixtures are not likely to occur in use.

\* \* \* \* \*

(c) \* \* \*

(4) Before we test one of your engines, we may calibrate it within normal production tolerances for anything we do not consider an adjustable parameter. For example, this would apply for an engine parameter that is subject to production variability because it is adjustable during production, but is not considered an adjustable parameter (as defined in § 1039.801) because it is permanently sealed. For parameters that relate to a level of performance that is itself subject to a specified range (such as maximum power output), we will generally perform any calibration under this paragraph (c)(4) in a way that keeps performance within the specified range.

(d) \* \* \*

(1) The engine family from the previous model year differs from the current engine family only with respect to model year, items identified in § 1039.225(a), or other characteristics unrelated to emissions. We may waive

this criterion for differences we determine not to be relevant.

\* \* \* \* \*

■ 135. Section 1039.240 is amended by revising paragraphs (c) and (d) and removing paragraph (e).

The revisions read as follows:

**§ 1039.240 How do I demonstrate that my engine family complies with exhaust emission standards?**

\* \* \* \* \*

(c) To compare emission levels from the emission-data engine with the applicable emission standards, apply deterioration factors to the measured emission levels for each pollutant. Section 1039.245 specifies how to test your engine to develop deterioration factors that represent the deterioration expected in emissions over your engines' full useful life. Your deterioration factors must take into account any available data from in-use testing with similar engines. Small-volume engine manufacturers may use assigned deterioration factors that we establish. Apply deterioration factors as follows:

(1) *Additive deterioration factor for exhaust emissions.* Except as specified in paragraph (c)(2) of this section, use an additive deterioration factor for exhaust emissions. An additive deterioration factor is the difference between exhaust emissions at the end of the useful life and exhaust emissions at the low-hour test point. In these cases, adjust the official emission results for each tested engine at the selected test point by adding the factor to the measured emissions. If the factor is less than zero, use zero. Additive deterioration factors must be specified to one more decimal place than the applicable standard.

(2) *Multiplicative deterioration factor for exhaust emissions.* Use a multiplicative deterioration factor if good engineering judgment calls for the deterioration factor for a pollutant to be the ratio of exhaust emissions at the end of the useful life to exhaust emissions at the low-hour test point. For example, if you use aftertreatment technology that controls emissions of a pollutant proportionally to engine-out emissions, it is often appropriate to use a multiplicative deterioration factor. Adjust the official emission results for each tested engine at the selected test point by multiplying the measured emissions by the deterioration factor. If the factor is less than one, use one. A multiplicative deterioration factor may not be appropriate in cases where testing variability is significantly greater than engine-to-engine variability. Multiplicative deterioration factors must

be specified to one more significant figure than the applicable standard.

(3) *Sawtooth deterioration patterns.* The deterioration factors described in paragraphs (c)(1) and (2) of this section assume that the highest useful life emissions occur either at the end of useful life or at the low-hour test point. The provisions of this paragraph (c)(3) apply where good engineering judgment indicates that the highest emissions over the useful life will occur between these two points. For example, emissions may increase with service accumulation until a certain maintenance step is performed, then return to the low-hour emission levels and begin increasing again. Base deterioration factors for engines with such emission patterns on the difference between (or ratio of) the point of the sawtooth at which the highest emissions occur and the low-hour test point. Note that this applies for maintenance-related deterioration only where we allow such critical emission-related maintenance.

(4) *Deterioration factor for smoke.* Deterioration factors for smoke are always additive, as described in paragraph (c)(1) of this section.

(5) *Deterioration factor for crankcase emissions.* If your engine vents crankcase emissions to the exhaust or to the atmosphere, you must account for crankcase emission deterioration, using good engineering judgment. You may use separate deterioration factors for crankcase emissions of each pollutant (either multiplicative or additive) or include the effects in combined deterioration factors that include exhaust and crankcase emissions together for each pollutant.

(6) *Dual-fuel and flexible-fuel engines.* In the case of dual-fuel and flexible-fuel engines, apply deterioration factors separately for each fuel type. You may accumulate service hours on a single emission-data engine using the type of fuel or the fuel mixture expected to have the highest combustion and exhaust temperatures; you may ask us to approve a different fuel mixture if you demonstrate that a different criterion is more appropriate.

(d) Determine the official emission result for each pollutant to at least one more decimal place than the applicable standard. Apply the deterioration factor to the official emission result, as described in paragraph (c) of this section, then round the adjusted figure to the same number of decimal places as the emission standard. Compare the rounded emission levels to the emission standard for each emission-data engine. In the case of NO<sub>x</sub>+NMHC standards, apply the deterioration factor to each

pollutant and then add the results before rounding.

\* \* \* \* \*

■ 136. Section 1039.250 is amended by revising paragraphs (b)(3)(iv) and (c) to read as follows:

**§ 1039.250 What records must I keep and what reports must I send to EPA?**

\* \* \* \* \*

(b) \* \* \*

(3) \* \* \*

(iv) All your emission tests, including the date and purpose of each test and documentation of test parameters as specified in part 40 CFR part 1065.

\* \* \* \* \*

(c) Keep required data from emission tests and all other information specified in this section for eight years after we issue your certificate. If you use the same emission data or other information for a later model year, the eight-year period restarts with each year that you continue to rely on the information.

\* \* \* \* \*

■ 137. Section 1039.255 is amended by revising paragraphs (c)(2), (c)(4), (d), and (e) to read as follows:

**§ 1039.255 What decisions may EPA make regarding my certificate of conformity?**

\* \* \* \* \*

(c) \* \* \*

(2) Submit false or incomplete information (paragraph (e) of this section applies if this is fraudulent). This includes doing anything after submission of your application to render any of the submitted information false or incomplete.

\* \* \* \* \*

(4) Deny us from completing authorized activities (see 40 CFR 1068.20). This includes a failure to provide reasonable assistance.

\* \* \* \* \*

(d) We may void the certificate of conformity for an engine family if you fail to keep records, send reports, or give us information as required under this part or the Act. Note that these are also violations of 40 CFR 1068.101(a)(2).

(e) We may void your certificate if we find that you intentionally submitted false or incomplete information. This includes rendering submitted information false or incomplete after submission.

\* \* \* \* \*

**Subpart F—Test Procedures**

■ 138. Section 1039.501 is amended by revising paragraphs (e), (f), and (g) and adding paragraph (h) to read as follows:

**§ 1039.501 How do I run a valid emission test?**

\* \* \* \* \*

(e) The following provisions apply for engines using aftertreatment technology with infrequent regeneration events that may occur during testing:

(1) Adjust measured emissions to account for aftertreatment technology with infrequent regeneration as described in § 1039.525.

(2) If your engine family includes engines with one or more emergency AECDs approved under § 1039.115(g)(4) or (5), do not consider additional regenerations resulting from those AECDs when developing adjustments to measured values under this paragraph (e).

(3) Invalidate a smoke test if active regeneration starts to occur during the test.

(f) You may disable any AECDs that have been approved solely for emergency equipment applications under § 1039.115(g)(4). Note that the emission standards do not apply when any of these AECDs are active.

(g) You may use special or alternate procedures to the extent we allow them under 40 CFR 1065.10.

(h) This subpart is addressed to you as a manufacturer, but it applies equally to anyone who does testing for you, and to us when we perform testing to determine if your engines meet emission standards.

■ 139. Section 1039.505 is amended by revising paragraph (b)(2) to read as follows:

**§ 1039.505 How do I test engines using steady-state duty cycles, including ramped-modal testing?**

\* \* \* \* \*

(b) \* \* \*

(2) Use the 6-mode duty cycle or the corresponding ramped-modal cycle described in paragraph (b) of Appendix II of this part for variable-speed engines below 19 kW. You may instead use the 8-mode duty cycle or the corresponding ramped-modal cycle described in paragraph (c) of Appendix II of this part if some engines from your engine family will be used in applications that do not involve governing to maintain engine operation around rated speed.

\* \* \* \* \*

■ 140. Section 1039.515 is amended by revising paragraph (a) to read as follows:

**§ 1039.515 What are the test procedures related to not-to-exceed standards?**

(a) *General provisions.* The provisions in 40 CFR 86.1370 apply for determining whether an engine meets the not-to-exceed emission standards in § 1039.101(e), except as noted in this section. Interpret references to vehicles

and vehicle operation to mean equipment and equipment operation.

\* \* \* \* \*

■ 141. Section 1039.525 is revised to read as follows:

**§ 1039.525 How do I adjust emission levels to account for infrequently regenerating aftertreatment devices?**

For engines using aftertreatment technology with infrequent regeneration events that may occur during testing, take one of the following approaches to account for the emission impact of regeneration:

(a) You may use the calculation methodology described in 40 CFR 1065.680 to adjust measured emission results. Do this by developing an upward adjustment factor and a downward adjustment factor for each pollutant based on measured emission data and observed regeneration frequency as follows:

(1) Adjustment factors should generally apply to an entire engine family, but you may develop separate adjustment factors for different configurations within an engine family. Use the adjustment factors from this section for all testing for the engine family.

(2) You may use carryover or carry-across data to establish adjustment factors for an engine family as described in § 1039.235, consistent with good engineering judgment.

(3) For engines that are required to certify to both transient and steady-state duty cycles, calculate a separate adjustment factor for steady-state and transient operation.

(b) You may ask us to approve an alternate methodology to account for regeneration events. We will generally limit approval to cases where your engines use aftertreatment technology with extremely infrequent regeneration and you are unable to apply the provisions of this section.

(c) You may choose to make no adjustments to measured emission results if you determine that regeneration does not significantly affect emission levels for an engine family (or configuration) or if it is not practical to identify when regeneration occurs. If you choose not to make adjustments under paragraph (a) or (b) of this section, your engines must meet emission standards for all testing, without regard to regeneration.

**Subpart G—Special Compliance Provisions**

■ 142. Section 1039.601 is revised to read as follows:

**§ 1039.601 What compliance provisions apply?**

(a) Engine and equipment manufacturers, as well as owners, operators, and rebuilders of engines subject to the requirements of this part, and all other persons, must observe the provisions of this part, the requirements and prohibitions in 40 CFR part 1068, and the provisions of the Act.

(b) Subpart C of this part describes how to test and certify dual-fuel and flexible-fuel engines. Some multi-fuel engines may not fit either of those defined terms. For such engines, we will determine whether it is most appropriate to treat them as single-fuel engines, dual-fuel engines, or flexible-fuel engines based on the range of possible and expected fuel mixtures. For example, an engine might burn natural gas but initiate combustion with a pilot injection of diesel fuel. If the engine is designed to operate with a single fueling algorithm (*i.e.*, fueling rates are fixed at a given engine speed and load condition), we would generally treat it as a single-fuel engine. In this context, the combination of diesel fuel and natural gas would be its own fuel type. If the engine is designed to also operate on diesel fuel alone, we would generally treat it as a dual-fueled engine. If the engine is designed to operate on varying mixtures of the two fuels, we would generally treat it as a flexible-fueled engine. To the extent that requirements vary for the different fuels or fuel mixtures, we may apply the more stringent requirements.

■ 143. Section 1039.605 is amended by revising paragraphs (b), (d)(5), and (d)(8) to read as follows:

**§ 1039.605 What provisions apply to engines certified under the motor-vehicle program?**

\* \* \* \* \*

(b) *Equipment-manufacturer provisions.* If you are not an engine manufacturer, you may install motor-vehicle engines certified for the appropriate model year under 40 CFR part 86 in nonroad equipment as long as you meet all the requirements and conditions specified in paragraph (d) of this section. You must also add the fuel-inlet label we specify in § 1039.135(e). If you modify the motor-vehicle engine in any of the ways described in paragraph (d)(2) of this section, we will consider you a manufacturer of a new nonroad engine. Such engine modifications prevent you from using the provisions of this section.

\* \* \* \* \*

(d) \* \* \*

(5) You must add a permanent supplemental label to the engine in a

position where it will remain clearly visible after installation in the equipment. In the supplemental label, do the following:

(i) Include the heading: “NONROAD ENGINE EMISSION CONTROL INFORMATION”.

(ii) Include your full corporate name and trademark. You may identify another company and use its trademark instead of yours if you comply with the branding provisions of 40 CFR 1068.45.

(iii) State: “THIS ENGINE WAS ADAPTED FOR NONROAD USE WITHOUT AFFECTING ITS EMISSION CONTROLS. THE EMISSION-CONTROL SYSTEM DEPENDS ON THE USE OF FUEL MEETING SPECIFICATIONS THAT APPLY FOR MOTOR-VEHICLE APPLICATIONS. OPERATING THE ENGINE ON OTHER FUELS MAY BE A VIOLATION OF FEDERAL LAW.”

(iv) State the date you finished modifying the engine (month and year), if applicable.

\* \* \* \* \*

(8) Send the Designated Compliance Officer written notification describing your plans before using the provisions of this section. In addition, by February 28 of each calendar year (or less often if we tell you), send the Designated Compliance Officer a signed letter with all the following information:

(i) Identify your full corporate name, address, and telephone number.

(ii) List the engine or equipment models for which you used this exemption in the previous year and describe your basis for meeting the sales restrictions of paragraph (d)(3) of this section.

(iii) State: “We prepared each listed [engine or equipment] model for nonroad application without making any changes that could increase its certified emission levels, as described in 40 CFR 1039.605.”

\* \* \* \* \*

144. Section 1039.610 is amended by revising paragraphs (d)(5)(ii) and (d)(7) to read as follows:

**§ 1039.610 What provisions apply to vehicles certified under the motor-vehicle program?**

\* \* \* \* \*

(d) \* \* \*

(5) \* \* \*

(ii) Include your full corporate name and trademark. You may identify another company and use its trademark instead of yours if you comply with the branding provisions of 40 CFR 1068.45.

\* \* \* \* \*

(7) Send the Designated Compliance Officer written notification describing

your plans before using the provisions of this section. In addition, by February 28 of each calendar year (or less often if we tell you), send the Designated Compliance Officer a signed letter with all the following information:

(i) Identify your full corporate name, address, and telephone number.

(ii) List the equipment models for which you used this exemption in the previous year and describe your basis for meeting the sales restrictions of paragraph (d)(3) of this section.

(iii) State: "We prepared each listed engine or equipment model for nonroad application without making any changes that could increase its certified emission levels, as described in 40 CFR 1039.610."

\* \* \* \* \*

Remove § 1039.640—[Removed]

■ 145. Section 1039.640 is removed.

#### Subpart H—Averaging, Banking, and Trading for Certification

■ 146. Section 1039.701 is amended by adding paragraph (h) to read as follows:

##### § 1039.701 General provisions.

\* \* \* \* \*

(h) You may use either of the following approaches to retire or forego emission credits:

(1) You may retire emission credits generated from any number of your engines. This may be considered donating emission credits to the environment. Identify any such credits in the reports described in § 1039.730. Engines must comply with the applicable FELs even if you donate or sell the corresponding emission credits under this paragraph (h). Those credits may no longer be used by anyone to demonstrate compliance with any EPA emission standards.

(2) You may certify a family using an FEL below the emission standard as described in this part and choose not to generate emission credits for that family. If you do this, you do not need to calculate emission credits for those families and you do not need to submit or keep the associated records described in this subpart for that family.

■ 147. Section 1039.705 is amended by revising paragraphs (b), (c) introductory text, and (c)(1) to read as follows:

##### § 1039.705 How do I generate and calculate emission credits?

\* \* \* \* \*

(b) For each participating family, calculate positive or negative emission credits relative to the otherwise applicable emission standard. Calculate positive emission credits for a family that has an FEL below the standard. Calculate negative emission credits for a

family that has an FEL above the standard. Sum your positive and negative credits for the model year before rounding. Round the sum of emission credits to the nearest kilogram (kg), using consistent units throughout the following equation:

$$\text{Emission credits (kg)} = (\text{Std} - \text{FEL}) < (\text{Volume}) < (\text{AvgPR}) < (\text{UL}) < (10^{-3})$$

Where:

Std = the emission standard, in grams per kilowatt-hour, that applies under subpart B of this part for engines not participating in the ABT program of this subpart (the "otherwise applicable standard").

FEL = the family emission limit for the engine family, in grams per kilowatt-hour.

Volume = the number of engines eligible to participate in the averaging, banking, and trading program within the given engine family during the model year, as described in paragraph (c) of this section.

AvgPR = the average of maximum engine power values of all the engine configurations within an engine family, calculated on a sales-weighted basis, in kilowatts.

UL = the useful life for the given engine family, in hours.

(c) As described in § 1039.730, compliance with the requirements of this subpart is determined at the end of the model year based on actual U.S.-directed production volumes. Do not include any of the following engines to calculate emission credits:

(1) Engines with a permanent exemption under subpart G of this part or under 40 CFR part 1068.

\* \* \* \* \*

■ 148. Section 1039.710 is amended by revising paragraph (c) to read as follows:

##### § 1039.710 How do I average emission credits?

\* \* \* \* \*

(c) If you certify an engine family to an FEL that exceeds the otherwise applicable standard, you must obtain enough emission credits to offset the engine family's deficit by the due date for the final report required in § 1039.730. The emission credits used to address the deficit may come from your other engine families that generate emission credits in the same model year, from emission credits you have banked from previous model years, or from emission credits generated in the same or previous model years that you obtained through trading.

■ 149. Section 1039.725 is amended by revising paragraph (b)(2) to read as follows:

##### § 1039.725 What must I include in my application for certification?

\* \* \* \* \*

(b) \* \* \*

(2) Detailed calculations of projected emission credits (positive or negative) based on projected production volumes. We may require you to include similar calculations from your other engine families to demonstrate that you will be able to avoid negative credit balances for the model year. If you project negative emission credits for a family, state the source of positive emission credits you expect to use to offset the negative emission credits.

■ 150. Section 1039.730 is amended by revising paragraphs (b)(1), (b)(4), and (c)(2) to read as follows:

##### § 1039.730 What ABT reports must I send to EPA?

\* \* \* \* \*

(b) \* \* \*

(1) Engine-family designation and averaging set.

\* \* \* \* \*

(4) The projected and actual U.S.-directed production volumes for the model year. If you changed an FEL during the model year, identify the actual U.S.-directed production volume associated with each FEL.

\* \* \* \* \*

(c) \* \* \*

(2) State whether you will retain any emission credits for banking. If you choose to retire emission credits that would otherwise be eligible for banking, identify the engine families that generated the emission credits, including the number of emission credits from each family.

\* \* \* \* \*

■ 151. Section 1039.735 is amended by revising paragraphs (a) and (b) to read as follows:

##### § 1039.735 What records must I keep?

(a) You must organize and maintain your records as described in this section.

(b) Keep the records required by this section for at least eight years after the due date for the end-of-year report. You may not use emission credits for any engines if you do not keep all the records required under this section. You must therefore keep these records to continue to bank valid credits.

\* \* \* \* \*

■ 152. Section 1039.740 is amended by revising paragraph (a) to read as follows:

##### § 1039.740 What restrictions apply for using emission credits?

\* \* \* \* \*

(a) *Averaging sets.* Emission credits may be exchanged only within an



averaging set. For emission credits generated by Tier 4 engines, there are two averaging sets—one for engines at or below 560 kW and another for engines above 560 kW.

\* \* \* \* \*

#### Subpart I—Definitions and Other Reference Information

■ 153. Section 1039.801 is amended as follows:

■ a. By revising the definitions of “Aircraft” and “Designated Compliance Officer”.

■ b. By removing the definition for “Designated Enforcement Officer”.

■ c. By adding definitions for “Dual-fuel” and “Flexible-fuel”.

■ d. By revising paragraph (1)(i) of the definition of “Model year” and the definition of “Placed into service”.

■ e. By removing the definition for “Point of first retail sale”.

The revisions and additions read as follows:

#### § 1039.801 What definitions apply to this part?

\* \* \* \* \*

*Aircraft* means any vehicle capable of sustained air travel more than 100 feet above the ground.

\* \* \* \* \*

*Designated Compliance Officer* means the Director, Diesel Engine Compliance Center, U.S. Environmental Protection Agency, 2000 Traverwood Drive, Ann Arbor, MI 48105; *complianceinfo@epa.gov*; *epa.gov/otaq/verify*.

\* \* \* \* \*

*Dual-fuel* means relating to an engine designed for operation on two different fuels but not on a continuous mixture of those fuels (see § 1039.601(b)). For purposes of this part, such an engine remains a dual-fuel engine even if it is designed for operation on three or more different fuels.

\* \* \* \* \*

*Flexible-fuel* means relating to an engine designed for operation on any mixture of two or more different fuels (see § 1039.601(b)).

\* \* \* \* \*

*Model year* means one of the following things:

(1) \* \* \*

(i) Calendar year of production.

\* \* \* \* \*

*Placed into service* means put into initial use for its intended purpose. Engines and equipment do not qualify as being “placed into service” based on incidental use by a manufacturer or dealer.

\* \* \* \* \*

■ 154. Section 1039.815 is revised to read as follows:

#### § 1039.815 What provisions apply to confidential information?

The provisions of 40 CFR 1068.10 apply for information you consider confidential.

■ 155. Section 1039.825 is revised to read as follows:

#### § 1039.825 What reporting and recordkeeping requirements apply under this part?

(a) This part includes various requirements to submit and record data or other information. Unless we specify otherwise, store required records in any format and on any media and keep them readily available for eight years after you send an associated application for certification, or eight years after you generate the data if they do not support an application for certification. You are expected to keep your own copy of required records rather than relying on someone else to keep records on your behalf. We may review these records at any time. You must promptly send us organized, written records in English if we ask for them. We may require you to submit written records in an electronic format.

(b) The regulations in § 1039.255, 40 CFR 1068.25, and 40 CFR 1068.101 describe your obligation to report truthful and complete information. This includes information not related to certification. Failing to properly report information and keep the records we specify violates 40 CFR 1068.101(a)(2), which may involve civil or criminal penalties.

(c) Send all reports and requests for approval to the Designated Compliance Officer (see § 1039.801).

(d) Any written information we require you to send to or receive from another company is deemed to be a required record under this section. Such records are also deemed to be submissions to EPA. We may require you to send us these records whether or not you are a certificate holder.

(e) Under the Paperwork Reduction Act (44 U.S.C. 3501 *et seq.*), the Office of Management and Budget approves the reporting and recordkeeping specified in the applicable regulations. The following items illustrate the kind of reporting and recordkeeping we require for engines and equipment regulated under this part:

(1) We specify the following requirements related to engine certification in this part 1039:

(i) In § 1039.20 we require engine manufacturers to label stationary engines that do not meet the standards in this part.

(ii) In § 1039.135 we require engine manufacturers to keep certain records

related to duplicate labels sent to equipment manufacturers.

(iii) [Reserved]

(iv) In subpart C of this part we identify a wide range of information required to certify engines.

(v) [Reserved]

(vi) In subpart G of this part we identify several reporting and recordkeeping items for making demonstrations and getting approval related to various special compliance provisions. For example, equipment manufacturers must submit reports and keep records related to the flexibility provisions in § 1039.625.

(vii) In § 1039.725, 1039.730, and 1039.735 we specify certain records related to averaging, banking, and trading.

(2) We specify the following requirements related to testing in 40 CFR part 1065:

(i) In 40 CFR 1065.2 we give an overview of principles for reporting information.

(ii) In 40 CFR 1065.10 and 1065.12 we specify information needs for establishing various changes to published test procedures.

(iii) In 40 CFR 1065.25 we establish basic guidelines for storing test information.

(iv) In 40 CFR 1065.695 we identify the specific information and data items to record when measuring emissions.

(3) We specify the following requirements related to the general compliance provisions in 40 CFR part 1068:

(i) In 40 CFR 1068.5 we establish a process for evaluating good engineering judgment related to testing and certification.

(ii) In 40 CFR 1068.25 we describe general provisions related to sending and keeping information.

(iii) In 40 CFR 1068.27 we require manufacturers to make engines available for our testing or inspection if we make such a request.

(iv) In 40 CFR 1068.105 we require equipment manufacturers to keep certain records related to duplicate labels from engine manufacturers.

(v) In 40 CFR 1068.120 we specify recordkeeping related to rebuilding engines.

(vi) In 40 CFR part 1068, subpart C, we identify several reporting and recordkeeping items for making demonstrations and getting approval related to various exemptions.

(vii) In 40 CFR part 1068, subpart D, we identify several reporting and recordkeeping items for making demonstrations and getting approval related to importing engines.

(viii) In 40 CFR 1068.450 and 1068.455 we specify certain records

related to testing production-line engines in a selective enforcement audit.

(ix) In 40 CFR 1068.501 we specify certain records related to investigating and reporting emission-related defects.

(x) In 40 CFR 1068.525 and 1068.530 we specify certain records related to recalling nonconforming engines.

## PART 1042—CONTROL OF EMISSIONS FROM NEW AND IN-USE MARINE COMPRESSION-IGNITION ENGINES AND VESSELS

■ 156. The authority citation for part 1042 continues to read as follows:

**Authority:** 42 U.S.C. 7401–7671q.

## Subpart A—Overview and Applicability

■ 157. Section 1042.1 is amended by revising paragraphs (a) and (c) introductory text to read as follows:

### § 1042.1 Applicability.

\* \* \* \* \*

(a) The emission standards of this part 1042 for freshly manufactured engines apply for new marine engines starting with the model years noted in the following table:

TABLE 1 TO § 1042.1—PART 1042 APPLICABILITY BY MODEL YEAR

Engine category	Maximum engine power <sup>a</sup>	Displacement (L/cyl) or application	Model year
Category 1 .....	kW < 75 .....	disp. < 0.9 .....	<sup>b</sup> 2009
		disp. < 0.9 .....	2012
		0.9 ≤ disp. < 1.2 .....	2013
		1.2 ≤ disp. < 2.5 .....	2014
		2.5 ≤ disp. < 3.5 .....	2013
		3.5 ≤ disp. < 7.0 .....	2012
		All .....	2014
Category 2 .....	kW > 3700 .....	7.0 ≤ disp. < 15.0 .....	2013
		7.0 ≤ disp. < 15.0 .....	2014
		15 ≤ disp. < 30 .....	2014
Category 3 .....	All .....	disp. ≥ 30 .....	2011

<sup>a</sup> See § 1042.140, which describes how to determine maximum engine power.

<sup>b</sup> See Table 1 of § 1042.101 for the first model year in which this part 1042 applies for engines with maximum engine power below 75 kW and displacement at or above 0.9 L/cyl.

\* \* \* \* \*

(c) Freshly manufactured engines with maximum engine power at or above 37 kW and originally manufactured and certified before the model years identified in Table 1 to this section are subject to emission standards and requirements of 40 CFR part 94. The provisions of this part 1042 do not apply for such engines certified under 40 CFR part 94, except as follows beginning June 29, 2010:

\* \* \* \* \*

■ 158. Section 1042.2 is revised to read as follows:

### § 1042.2 Who is responsible for compliance?

The regulations in this part 1042 contain provisions that affect both engine manufacturers and others. However, the requirements of this part, other than those of subpart I of this part, are generally addressed to the engine manufacturer for freshly manufactured marine engines or other certificate holders. The term “you” generally means the engine manufacturer, as

defined in § 1042.901, especially for issues related to certification (including production-line testing, reporting, etc.). Note that for engines that become new after being placed into service (such as engines converted from highway or stationary use, or engines installed on vessels that are reflagged to become U.S. vessels), the requirements that normally apply for manufacturers of freshly manufactured engines apply to the importer or any other entity we allow to obtain a certificate of conformity.

■ 159. Section 1042.30 is revised to read as follows:

### § 1042.30 Submission of information.

Unless we specify otherwise, send all reports and requests for approval to the Designated Compliance Officer (see § 1042.901). See § 1042.925 for additional reporting and recordkeeping provisions.

## Subpart B—Emission Standards and Related Requirements

■ 160. Section 1042.101 is amended by revising the section heading and

paragraphs (a), (b), and (c) to read as follows:

### § 1042.101 Exhaust emission standards for Category 1 and Category 2 engines.

(a) *Duty-cycle standards.* Exhaust emissions from your engines may not exceed emission standards, as follows:

(1) Measure emissions using the test procedures described in subpart F of this part.

(2) The following CO emission standards in this paragraph (a)(2) apply starting with the applicable model year identified in § 1042.1:

(i) 8.0 g/kW-hr for engines below 8 kW.

(ii) 6.6 g/kW-hr for engines at or above 8 kW and below 19 kW.

(iii) 5.5 g/kW-hr for engines at or above 19 kW and below 37 kW.

(iv) 5.0 g/kW-hr for engines at or above 37 kW.

(3) Except as described in paragraphs (a)(4) and (5) of this section, the Tier 3 standards for PM and NO<sub>x</sub>+HC emissions are described in the following tables:

TABLE 1 TO § 1042.101—TIER 3 STANDARDS FOR CATEGORY 1 ENGINES BELOW 3700 kW<sup>a</sup>

Power density and application	Displacement (L/cyl)	Maximum engine power	Model year	PM (g/kW-hr)	NO <sub>x</sub> +HC (g/kW-hr) <sup>b</sup>
all .....	disp. < 0.9 .....	kW < 19 .....	2009+	0.40	7.5
		19 > kW < 75 .....	2009–2013	0.30	7.5
			2014+	<sup>c</sup> 0.30	<sup>c</sup> 4.7

TABLE 1 TO § 1042.101—TIER 3 STANDARDS FOR CATEGORY 1 ENGINES BELOW 3700 kW<sup>a</sup>—Continued

Power density and application	Displacement (L/cyl)	Maximum engine power	Model year	PM (g/kW-hr)	NO <sub>x</sub> +HC (g/kW-hr) <sup>b</sup>
Commercial engines with kW/L ≤35.	disp. < 0.9 .....	kW ≥ 75 .....	2012+	0.14	5.4
	0.9 ≤ disp. < 1.2 .....	all .....	2013+	0.12	5.4
	1.2 ≤ disp. < 2.5 .....	kW < 600 .....	2014–2017	0.11	5.6
			2018+	0.10	5.6
		kW ≥ 600.	2014+	0.11	5.6
	2.5 > disp. < 3.5 .....	kW < 600 .....	2013–2017	0.11	5.6
			2018+	0.10	5.6
		kW ≥ 600 .....	2013+	0.11	5.6
Commercial engines with kW/L >35, and all recreational engines ≥75 kW.	disp. < 0.9 .....	kW ≥ 75 .....	2012+	0.15	5.8
	0.9 ≤ disp. < 1.2 .....	all .....	2013+	0.14	5.8
	1.2 ≤ disp. < 2.5 .....		2014+	0.12	5.8
	2.5 > disp. < 3.5 .....		2013+	0.12	5.8
	3.5 > disp. < 7.0 .....		2012+	0.11	5.8

<sup>a</sup>No Tier 3 standards apply for commercial Category 1 engines at or above 3700 kW. See § 1042.1(c) and paragraph (a)(7) of this section for the standards that apply for these engines.

<sup>b</sup>The applicable NO<sub>x</sub>+HC standards specified for Tier 2 engines in Appendix I of this part continue to apply instead of the values noted in the table for commercial engines at or above 2000 kW. FELs for these engines may not be higher than the Tier 1 NO<sub>x</sub> standard specified in Appendix I of this part.

<sup>c</sup>See paragraph (a)(4) of this section for alternative PM and NO<sub>x</sub>+HC standards for engines at or above 19 kW and below 75 kW with displacement below 0.9 L/cyl.

TABLE 2 TO § 1042.101—TIER 3 STANDARDS FOR CATEGORY 2 ENGINES BELOW 3700 kW<sup>a</sup>

Displacement (L/cyl)	Maximum engine power	Model year	PM (g/kW-hr)	NO <sub>x</sub> +HC (g/kW-hr)
7.0 ≤ disp. ≤ 15.0 .....	kW < 2000 .....	2013+	0.14	6.2
	2000 ≤ kW ≤ 3700 .....	2013+	0.14	<sup>b</sup> 7.8
15.0 ≤ disp. < 20.0 <sup>c</sup> .....	kW < 2000 .....	2014+	0.34	7.0
20.0 ≤ disp. < 25.0 <sup>c</sup> .....	kW < 2000 .....	2014+	0.27	9.8
25.0 ≤ disp. < 30.0 <sup>c</sup> .....	kW < 2000 .....	2014+	0.27	11.0

<sup>a</sup>The Tier 3 standards in this table do not apply for Category 2 engines at or above 2000 kW with per-cylinder displacement at or above 15.0 liters, or for any Category 2 engines at or above 3700 kW. See § 1042.1(c) and paragraphs (a)(6) through (8) of this section for the standards that apply for these engines.

<sup>b</sup>For engines subject to the 7.8 g/kW-hr NO<sub>x</sub>+HC standard, FELs may not be higher than the Tier 1 NO<sub>x</sub> standards specified in Appendix I of this part.

<sup>c</sup>There are no Tier 3 standards for Category 2 engines with per-cylinder displacement at or above 15 and 20 liters with maximum engine power at or above 2000 kW. See paragraphs (a)(6) and (7) of this section for the Tier 4 standards that apply for these engines starting with the 2014 model year.

(4) For Tier 3 engines at or above 19 kW and below 75 kW with displacement below 0.9 L/cyl, you may alternatively certify some or all of your engine families to a PM emission standard of 0.20 g/kW-hr and a NO<sub>x</sub>+HC emission standard of 5.8 g/kW-hr for 2014 and later model years.

(5) Starting with the 2014 model year, recreational marine engines at or above 3700 kW (with any displacement) must be certified under this part 1042 to the Tier 3 standards specified in this section for 3.5 to 7.0 L/cyl recreational marine engines.

(6) Interim Tier 4 PM standards apply for 2014 and 2015 model year engines between 2000 and 3700 kW as specified in this paragraph (a)(6). These engines are considered to be Tier 4 engines.

(i) For Category 1 engines, the Tier 3 PM standards from Table 1 to this section continue to apply. PM FELs for these engines may not be higher than the applicable Tier 2 PM standards specified in Appendix I of this part.

(ii) For Category 2 engines with per-cylinder displacement below 15.0 liters, the Tier 3 PM standards from Table 2 to this section continue to apply. PM FELs

for these engines may not be higher than 0.27 g/kW-hr.

(iii) For Category 2 engines with per-cylinder displacement at or above 15.0 liters, the PM standard is 0.34 g/kW-hr for engines at or above 2000 kW and below 3300 kW, and 0.27 g/kW-hr for engines at or above 3300 kW and below 3700 kW. PM FELs for these engines may not be higher than 0.50 g/kW-hr.

(7) Except as described in paragraph (a)(8) of this section, the Tier 4 standards for PM, NO<sub>x</sub>, and HC emissions are described in the following table:

TABLE 3 TO § 1042.101—TIER 4 STANDARDS FOR CATEGORY 2 AND COMMERCIAL CATEGORY 1 ENGINES AT OR ABOVE 600 kW

Maximum engine power	Displacement (L/cyl)	Model year	PM (g/kW-hr)	NO <sub>x</sub> (g/kW-hr)	HC (g/kW-hr)
600 ≤ kW < 1400 .....	all .....	2017+ .....	0.04	1.8	0.19
1400 ≤ kW < 2000 .....	all .....	2016+ .....	0.04	1.8	0.19
2000 ≤ kW ≤ 3700 <sup>a</sup> .....	all .....	2014+ .....	0.04	1.8	0.19
kW > 3700 .....	disp. < 15.0 .....	2014–2015 .....	0.12	1.8	0.19
	15.0 ≤ disp. < 30.0 .....	2014–2015 .....	0.25	1.8	0.19

TABLE 3 TO § 1042.101—TIER 4 STANDARDS FOR CATEGORY 2 AND COMMERCIAL CATEGORY 1 ENGINES AT OR ABOVE 600 kW—Continued

Maximum engine power	Displacement (L/cyl)	Model year	PM (g/kW-hr)	NO <sub>x</sub> (g/kW-hr)	HC (g/kW-hr)
	all .....	2016+ .....	0.06	1.8	0.19

<sup>a</sup>See paragraph (a)(6) of this section for interim PM standards that apply for model years 2014 and 2015 for engines between 2000 and 3700 kW. The Tier 4 NO<sub>x</sub> FEL cap for engines at or above 2000 kW and below 3700 kW is 7.0 g/kW-hr. Starting in the 2016 model year, the Tier 4 PM FEL cap for engines at or above 2000 kW and below 3700 kW is 0.34 g/kW-hr.

(8) The following optional provisions apply for complying with the Tier 3 and Tier 4 standards specified in paragraphs (a)(3) through (7) of this section:

(i) You may use NO<sub>x</sub> credits accumulated through the ABT program to certify Tier 4 engines to a NO<sub>x</sub>+HC emission standard of 1.9 g/kW-hr instead of the NO<sub>x</sub> and HC standards that would otherwise apply by certifying your family to a NO<sub>x</sub>+HC FEL. Calculate the NO<sub>x</sub> credits needed as specified in subpart H of this part using the NO<sub>x</sub>+HC emission standard and FEL in the calculation instead of the otherwise applicable NO<sub>x</sub> standard and

FEL. You may not generate credits relative to the alternate standard or certify to the standard without using credits.

(ii) For engines below 1000 kW, you may delay complying with the Tier 4 standards in the 2017 model year for up to nine months, but you must comply no later than October 1, 2017.

(iii) For engines at or above 3700 kW, you may delay complying with the Tier 4 standards in the 2016 model year for up to twelve months, but you must comply no later than December 31, 2016.

(iv) For Category 2 engines at or above 1400 kW, you may alternatively comply with the Tier 3 and Tier 4 standards specified in Table 4 of this section instead of the NO<sub>x</sub>, HC, NO<sub>x</sub>+HC, and PM standards specified in paragraphs (a)(3) through (7) of this section. The CO standards specified in paragraph (a)(2) of this section apply without regard to whether you choose this option. If you choose this option, you must do so for all engines at or above 1400 kW in the same displacement category (that is, 7–15, 15–20, 20–25, or 25–30 liters per cylinder) in model years 2012 through 2015.

TABLE 4 TO § 1042.101—OPTIONAL TIER 3 AND TIER 4 STANDARDS FOR CATEGORY 2 ENGINES AT OR ABOVE 1400 kW

Tier	Maximum engine power	Model year	PM (g/kW-hr)	NO <sub>x</sub> (g/kW-hr)	HC (g/kW-hr)
Tier 3 .....	kW >1400 .....	2012–2014	0.14	7.8 NO <sub>x</sub> +HC	
Tier 4 .....	1400 ≤kW ≤3700 .....	2015	0.04	1.8 .....	0.19
	kW >3700 .....	2015	0.06	1.8 .....	0.19

(b) *Averaging, banking, and trading.* You may generate or use emission credits under the averaging, banking, and trading (ABT) program as described in subpart H of this part for demonstrating compliance with NO<sub>x</sub>, NO<sub>x</sub>+HC, and PM emission standards for Category 1 and Category 2 engines. You may also use NO<sub>x</sub> or NO<sub>x</sub>+HC emission credits to comply with the alternate NO<sub>x</sub>+HC standard in paragraph (a)(8)(i) of this section. Generating or using emission credits requires that you specify a family emission limit (FEL) for each pollutant you include in the ABT program for each engine family. These FELs serve as the emission standards for the engine family with respect to all required testing instead of the standards specified in paragraph (a) of this section. The FELs determine the not-to-exceed standards for your engine family, as specified in paragraph (c) of this section. Unless otherwise specified, the following FEL caps apply:

(1) FELs for Tier 3 engines may not be higher than the applicable Tier 2

standards specified in Appendix I of this part.

(2) FELs for Tier 4 engines may not be higher than the applicable Tier 3 standards specified in paragraph (a)(3) of this section.

(3) The following FEL caps apply for engines at or above 3700 kW that are not subject to Tier 3 standards under paragraph (a)(3) of this section:

(i) FELs may not be higher than the applicable Tier 1 NO<sub>x</sub> standards specified in Appendix I of this part before the Tier 4 standards start to apply.

(ii) FELs may not be higher than the applicable Tier 2 NO<sub>x</sub>+THC standards specified in Appendix I of this part after the Tier 4 standards start to apply.

(c) *Not-to-exceed standards.* Except as noted in § 1042.145(e), exhaust emissions from all engines subject to the requirements of this part may not exceed the not-to-exceed (NTE) standards as follows:

(1) Use the following equation to determine the NTE standards:

(i) NTE standard for each pollutant = STD × M.

Where:

STD = The standard specified for that pollutant in this section if you certify without using ABT for that pollutant; or the FEL for that pollutant if you certify using ABT.

M = The NTE multiplier for that pollutant.

(ii) Round each NTE standard to the same number of decimal places as the emission standard.

(2) Determine the applicable NTE zone and subzones as described in § 1042.515. Determine NTE multipliers for specific zones and subzones and pollutants as follows:

(i) For marine engines certified using the duty cycle specified in § 1042.505(b)(1), except for variable-speed propulsion marine engines used with controllable-pitch propellers or with electrically coupled propellers, apply the following NTE multipliers:

(A) Subzone 1: 1.2 for Tier 3 NO<sub>x</sub>+HC standards.

(B) Subzone 1: 1.5 for Tier 4 standards and Tier 3 p.m. and CO standards.

(C) Subzone 2: 1.5 for Tier 4 NO<sub>x</sub> and HC standards and for Tier 3 NO<sub>x</sub>+HC standards.

(D) Subzone 2: 1.9 for PM and CO standards.

(ii) For recreational marine engines certified using the duty cycle specified in § 1042.505(b)(2), except for variable-speed marine engines used with controllable-pitch propellers or with electrically coupled propellers, apply the following NTE multipliers:

(A) Subzone 1: 1.2 for Tier 3 NO<sub>x</sub>+HC standards.

(B) Subzone 1: 1.5 for Tier 3 p.m. and CO standards.

(C) Subzones 2 and 3: 1.5 for Tier 3 NO<sub>x</sub>+HC standards.

(D) Subzones 2 and 3: 1.9 for PM and CO standards.

(iii) For variable-speed marine engines used with controllable-pitch propellers or with electrically coupled propellers that are certified using the duty cycle specified in § 1042.505(b)(1), (2), or (3), apply the following NTE multipliers:

(A) Subzone 1: 1.2 for Tier 3 NO<sub>x</sub>+HC standards.

(B) Subzone 1: 1.5 for Tier 4 standards and Tier 3 p.m. and CO standards.

(C) Subzone 2: 1.5 for Tier 4 NO<sub>x</sub> and HC standards and for Tier 3 NO<sub>x</sub>+HC standards.

(D) Subzone 2: 1.9 for PM and CO standards. However, there is no NTE standard in Subzone 2b for PM emissions if the engine family's

applicable standard for PM is at or above 0.07 g/kW-hr.

(iv) For constant-speed engines certified using a duty cycle specified in § 1042.505(b)(3) or (4), apply the following NTE multipliers:

(A) Subzone 1: 1.2 for Tier 3 NO<sub>x</sub>+HC standards.

(B) Subzone 1: 1.5 for Tier 4 standards and Tier 3 p.m. and CO standards.

(C) Subzone 2: 1.5 for Tier 4 NO<sub>x</sub> and HC standards and for Tier 3 NO<sub>x</sub>+HC standards.

(D) Subzone 2: 1.9 for PM and CO standards. However, there is no NTE standard for PM emissions if the engine family's applicable standard for PM is at or above 0.07 g/kW-hr.

(v) For variable-speed auxiliary marine engines certified using the duty cycle specified in § 1042.505(b)(5)(ii) or (iii):

(A) Subzone 1: 1.2 for Tier 3 NO<sub>x</sub>+HC standards.

(B) Subzone 1: 1.5 for Tier 4 standards and Tier 3 p.m. and CO standards.

(C) Subzone 2: 1.2 for Tier 3 NO<sub>x</sub>+HC standards.

(D) Subzone 2: 1.5 for Tier 4 standards and Tier 3 p.m. and CO standards. However, there is no NTE standard for PM emissions if the engine family's

applicable standard for PM is at or above 0.07 g/kW-hr.

(3) The NTE standards apply to your engines whenever they operate within the NTE zone for an NTE sampling period of at least thirty seconds, during which only a single operator demand set point may be selected. Engine operation during a change in operator demand is excluded from any NTE sampling period. There is no maximum NTE sampling period.

(4) Collect emission data for determining compliance with the NTE standards using the procedures described in subpart F of this part.

(5) You may ask us to accept as compliant an engine that does not fully meet specific requirements under the applicable NTE standards where such deficiencies are necessary for safety.

\* \* \* \* \*

■ 161. Section 1042.104 is amended by revising paragraph (a)(2) to read as follows:

**§ 1042.104 Exhaust emission standards for Category 3 engines.**

(a) \* \* \*

(2) NO<sub>x</sub> standards apply based on the engine's model year and maximum in-use engine speed as shown in the following table:

TABLE 1 TO § 1042.104—NO<sub>x</sub> EMISSION STANDARDS FOR CATEGORY 3 ENGINES  
[g/kW-hr]

Emission standards	Model year	Maximum in-use engine speed		
		Less than 130 RPM	130–2000 RPM <sup>a</sup>	Over 2000 RPM
Tier 1 .....	2004–2010 <sup>b</sup> .....	17.0	45.0 · n <sup>(-0.20)</sup> .....	9.8
Tier 2 .....	2011–2015 .....	14.4	44.0 · n <sup>(-0.23)</sup> .....	7.7
Tier 3 <sup>c</sup> .....	2016 and later .....	3.4	9.0 · n <sup>(-0.20)</sup> .....	2.0

<sup>a</sup> Applicable standards are calculated from n (maximum in-use engine speed, in RPM, as specified in § 1042.140). Round the standards to one decimal place.

<sup>b</sup> Tier 1 NO<sub>x</sub> standards apply as specified in 40 CFR part 94 for engines originally manufactured in model years 2004 through 2010. They are shown here only for reference.

<sup>c</sup> For engines designed with on-off controls as specified in § 1042.115(g), the Tier 2 standards continue to apply anytime the engine has disabled its Tier 3 NO<sub>x</sub> emission controls.

\* \* \* \* \*

■ 162. Section 1042.110 is amended by removing and reserving paragraph (b) and revising paragraph (d).

The revision reads as follows:

**§ 1042.110 Recording reductant use and other diagnostic functions.**

\* \* \* \* \*

(d) For Category 3 engines equipped with on-off NO<sub>x</sub> controls (as allowed by § 1042.115(g)), you must also equip your engine to continuously monitor NO<sub>x</sub> concentrations in the exhaust. See § 1042.650 to determine if this requirement applies for a given Category 1 or Category 2 engine. For

measurement technologies involving discrete sampling events, measurements are considered continuous if they repeat at least once every 60 seconds; we may approve a longer sampling period if it is necessary or appropriate for sufficiently accurate measurements. Describe your system for onboard NO<sub>x</sub> measurements in your application for certification. Use good engineering judgment to alert operators if measured NO<sub>x</sub> concentrations indicate malfunctioning emission controls. Record any such operation in nonvolatile computer memory. You are not required to monitor NO<sub>x</sub> concentrations during operation for which the emission

controls may be disabled under § 1042.115(g). For the purpose of this paragraph (d), “malfunctioning emission controls” means any condition in which the measured NO<sub>x</sub> concentration exceeds the highest value expected when the engine is in compliance with the installed engine standard of § 1042.104(g). Use good engineering judgment to determine these expected values during production-line testing of the engine using linear interpolation between test points and accounting for the degree to which the cycle-weighted emissions of the engine are below the standard. You may also use additional intermediate

test points measured during the production-line test. Note that the provisions of paragraph (a) of this section also apply for SCR systems covered by this paragraph (d). For engines subject to both the provisions of paragraph (a) of this section and this paragraph (d), use good engineering judgment to integrate diagnostic features to comply with both paragraphs. For example, engines may use on-off NO<sub>x</sub> controls to disable certain emission control functions only if the diagnostic system indicates that the monitoring described in this paragraph (d) is active.

■ 163. Section 1042.120 is amended by revising paragraph (b) introductory text to read as follows:

**§ 1042.120 Emission-related warranty requirements.**

(b) *Warranty period.* Your emission-related warranty must be valid for at least as long as the minimum warranty periods listed in this paragraph (b) in hours of operation and years, whichever comes first. You may offer an emission-related warranty more generous than we require. The emission-related warranty for the engine may not be shorter than any basic mechanical warranty you provide without charge for the engine. Similarly, the emission-related warranty for any component may not be shorter than any warranty you provide without charge for that component. This means that your warranty may not treat emission-related and nonemission-related defects differently for any component. If an engine has no hour meter, we base the warranty periods in this paragraph (b) only on the engine's age (in years). The warranty period begins when the engine is placed into service. The following minimum warranty periods apply:

■ 164. Section 1042.125 is amended by revising paragraphs (a)(2)(i), (a)(3)(i), (c), and (e) to read as follows:

**§ 1042.125 Maintenance instructions.**

(a) \* \* \*

(2) \* \* \*

(i) For EGR-related filters and coolers, DEF filters, PCV valves, and fuel injector tips (cleaning only), the minimum interval is 1,500 hours.

(3) \* \* \*

(i) For EGR-related filters and coolers, DEF filters, PCV valves, and fuel injector tips (cleaning only), the minimum interval is 1,500 hours.

(c) *Special maintenance.* You may specify more frequent maintenance to

address problems related to special situations, such as atypical engine operation. You must clearly state that this additional maintenance is associated with the special situation you are addressing. You may also address maintenance of low-use engines (such as recreational or stand-by engines) by specifying the maintenance interval in terms of calendar months or years in addition to your specifications in terms of engine operating hours. All special maintenance instructions must be consistent with good engineering judgment. We may disapprove your maintenance instructions if we determine that you have specified special maintenance steps to address maintenance that is unlikely to occur in use, or engine operation that is not atypical. For example, this paragraph (c) does not allow you to design engines that require special maintenance for a certain type of expected operation. If we determine that certain maintenance items do not qualify as special maintenance under this paragraph (c), you may identify this as recommended additional maintenance under paragraph (b) of this section.

(e) *Maintenance that is not emission-related.* For maintenance unrelated to emission controls, you may schedule any amount of inspection or maintenance. You may also take these inspection or maintenance steps during service accumulation on your emission-data engines, as long as they are reasonable and technologically necessary. This might include adding engine oil, changing air, fuel, or oil filters, servicing engine-cooling systems, and adjusting idle speed, governor, engine bolt torque, valve lash, or injector lash. You may not perform this nonemission-related maintenance on emission-data engines more often than the least frequent intervals that you recommend to the ultimate purchaser.

■ 165. Section 1042.130 is amended by revising paragraph (b) to read as follows:

**§ 1042.130 Installation instructions for vessel manufacturers.**

(b) Make sure these instructions have the following information:

(1) Include the heading: "Emission-related installation instructions".

(2) State: "Failing to follow these instructions when installing a certified engine in a vessel violates federal law (40 CFR 1068.105(b)), subject to fines or other penalties as described in the Clean Air Act."

(3) Describe the instructions needed to properly install the exhaust system

and any other components. Include instructions consistent with the requirements of § 1042.205(u).

(4) Describe any necessary steps for installing the diagnostic system described in § 1042.110.

(5) Describe how your certification is limited for any type of application. For example, if your engines are certified only for constant-speed operation, tell vessel manufacturers not to install the engines in variable-speed applications or modify the governor.

(6) Describe any other instructions to make sure the installed engine will operate according to design specifications in your application for certification. This may include, for example, instructions for installing aftertreatment devices when installing the engines.

(7) State: "If you install the engine in a way that makes the engine's emission control information label hard to read during normal engine maintenance, you must place a duplicate label on the vessel, as described in 40 CFR 1068.105."

(8) Describe any vessel labeling requirements specified in § 1042.135.

■ 166. Section 1042.135 is amended by revising paragraphs (c), (d)(1), and (e) introductory text to read as follows:

**§ 1042.135 Labeling.**

(c) The label must—

(1) Include the heading "EMISSION CONTROL INFORMATION".

(2) Include your full corporate name and trademark. You may identify another company and use its trademark instead of yours if you comply with the branding provisions of 40 CFR 1068.45.

(3) Include EPA's standardized designation for the engine family (and subfamily, where applicable).

(4) Identify all the emission standards that apply to the engine (or FELs, if applicable). If you do not declare an FEL under subpart H of this part, you may alternatively state the engine's category, displacement (in liters or L/cyl), maximum engine power (in kW), and power density (in kW/L) as needed to determine the emission standards for the engine family. You may specify displacement, maximum engine power, or power density as a range consistent with the ranges listed in § 1042.101. See § 1042.140 for descriptions of how to specify per-cylinder displacement, maximum engine power, and power density.

(5) State the date of manufacture [DAY (optional), MONTH, and YEAR]; however, you may omit this from the label if you stamp, engrave, or otherwise

permanently identify it elsewhere on the engine, in which case you must also describe in your application for certification where you will identify the date on the engine.

(6) Identify the application(s) for which the engine family is certified (such as constant-speed auxiliary, variable-speed propulsion engines used with fixed-pitch propellers, etc.). If the engine is certified as a recreational engine, state: "INSTALLING THIS RECREATIONAL ENGINE IN A COMMERCIAL VESSEL OR USING THE VESSEL FOR COMMERCIAL PURPOSES MAY VIOLATE FEDERAL LAW SUBJECT TO CIVIL PENALTY (40 CFR 1042.601)."

(7) For engines using sulfur-sensitive technologies, state: "ULTRA LOW SULFUR DIESEL FUEL ONLY".

(8) State the useful life for your engine family if the applicable useful life is based on the provisions of § 1042.101(e)(2) or (3), or § 1042.104(d)(2).

(9) Identify the emission control system. Use terms and abbreviations as described in 40 CFR 1068.45. You may omit this information from the label if there is not enough room for it and you put it in the owners manual instead.

(10) State: "THIS MARINE ENGINE COMPLIES WITH U.S. EPA REGULATIONS FOR [MODEL YEAR]."

(11) For a Category 1 or Category 2 engine that can be modified to operate on residual fuel, but has not been certified to meet the standards on such a fuel, include the statement: "THIS ENGINE IS CERTIFIED FOR OPERATION ONLY WITH DIESEL FUEL. MODIFYING THE ENGINE TO OPERATE ON RESIDUAL OR INTERMEDIATE FUEL MAY BE A VIOLATION OF FEDERAL LAW SUBJECT TO CIVIL PENALTIES."

(12) For an engine equipped with on-off emissions controls as allowed by § 1042.115, include the statement: "THIS ENGINE IS CERTIFIED WITH ON-OFF EMISSION CONTROLS. OPERATION OF THE ENGINE CONTRARY TO 40 CFR 1042.115(g) IS A VIOLATION OF FEDERAL LAW SUBJECT TO CIVIL PENALTIES."

(13) For engines intended for installation on domestic or public vessels, include the following statement: "THIS ENGINE DOES NOT COMPLY WITH INTERNATIONAL MARINE REGULATIONS FOR COMMERCIAL VESSELS UNLESS IT IS ALSO COVERED BY AN EIAPP CERTIFICATE."

(d) \* \* \*

(1) If your emission control information label includes all the information described in paragraphs

(c)(5) and (9) of this section, you may identify other emission standards that the engine meets or does not meet (such as international standards). You may include this information by adding it to the statement we specify or by including a separate statement.

\* \* \* \* \*

(e) For engines using sulfur-sensitive technologies, create a separate label with the statement: "ULTRA LOW SULFUR DIESEL FUEL ONLY". Permanently attach this label to the vessel near the fuel inlet or, if you do not manufacture the vessel, take one of the following steps to ensure that the vessel will be properly labeled:

\* \* \* \* \*

■ 167. Section 1042.140 is amended by revising paragraph (e) to read as follows:

**§ 1042.140 Maximum engine power, displacement, power density, and maximum in-use engine speed.**

\* \* \* \* \*

(e) Throughout this part, references to a specific power value for an engine are based on maximum engine power. For example, the group of engines with maximum engine power below 600 kW may be referred to as engines below 600 kW.

\* \* \* \* \*

### Subpart C—Certifying Engine Families

■ 168. Section 1042.201 is amended by revising paragraphs (a) and (g) to read as follows:

**§ 1042.201 General requirements for obtaining a certificate of conformity.**

(a) You must send us a separate application for a certificate of conformity for each engine family. A certificate of conformity is valid for new production from the indicated effective date until the end of the model year for which it is issued, which may not extend beyond December 31 of that year. No certificate will be issued after December 31 of the model year. You may amend your application for certification after the end of the model year in certain circumstances as described in §§ 1042.220 and 1042.225. You must renew your certification annually for any engines you continue to produce.

\* \* \* \* \*

(g) We may require you to deliver your test engines to a facility we designate for our testing (see § 1042.235(c)). Alternatively, you may choose to deliver another engine that is identical in all material respects to the test engine, or another engine that we determine can appropriately serve as an

emission-data engine for the engine family.

\* \* \* \* \*

■ 169. Section 1042.205 is amended by revising paragraphs (g), (o), (r)(1), and (bb)(1) to read as follows:

**§ 1042.205 Application requirements.**

\* \* \* \* \*

(g) List the specifications of the test fuel(s) to show that they fall within the required ranges we specify in 40 CFR part 1065.

\* \* \* \* \*

(o) Present emission data for HC, NO<sub>x</sub>, PM, and CO on an emission-data engine to show your engines meet emission standards as specified in §§ 1042.101 or 1042.104. Note that you must submit PM data for all engines, whether or not a PM standard applies. Show emission figures before and after applying adjustment factors for regeneration and deterioration factors for each pollutant and for each engine. If we specify more than one grade of any fuel type (for example, high-sulfur and low-sulfur diesel fuel), you need to submit test data only for one grade, unless the regulations of this part specify otherwise for your engine. Include emission results for each mode for Category 3 engines or for other engines if you do discrete-mode testing under § 1042.505. For engines using on-off controls as described in § 1042.115(g), include emission data demonstrating compliance with the Tier 2 standards when the engines Tier 3 NO<sub>x</sub> emission controls are disabled. Note that §§ 1042.235 and 1042.245 allows you to submit an application in certain cases without new emission data.

\* \* \* \* \*

(r) \* \* \*

(1) Report all valid test results involving measurement of pollutants for which emission standards apply. Also indicate whether there are test results from invalid tests or from any other tests of the emission-data engine, whether or not they were conducted according to the test procedures of subpart F of this part. We may require you to report these additional test results. We may ask you to send other information to confirm that your tests were valid under the requirements of this part and 40 CFR part 1065.

\* \* \* \* \*

(bb) \* \* \*

(1) Describe your normal practice for importing engines. For example, this may include identifying the names and addresses of any agents you have authorized to import your engines.

\* \* \* \* \*

■ 170. Section 1042.225 is amended by revising the introductory text and adding paragraph (b)(4) to read as follows:

**§ 1042.225 Amending applications for certification.**

Before we issue you a certificate of conformity, you may amend your application to include new or modified engine configurations, subject to the provisions of this section. After we have issued your certificate of conformity, but before the end of the model year, you may send us an amended application requesting that we include new or modified engine configurations within the scope of the certificate, subject to the provisions of this section. Before the end of the model year, you must amend your application if any changes occur with respect to any information that is included or should be included in your application. After the end of the model year, you may amend your application only to update maintenance instructions as described in § 1042.220 or to modify an FEL as described in paragraph (f) of this section.

\* \* \* \* \*

(b) \* \* \*

(4) Include any other information needed to make your application correct and complete.

\* \* \* \* \*

■ 171. Section 1042.235 is amended by revising paragraphs (b), (c)(4), and (d)(1) to read as follows:

**§ 1042.235 Emission testing related to certification.**

\* \* \* \* \*

(b) Test your emission-data engines using the procedures and equipment specified in subpart F of this part. In the case of dual-fuel engines, measure emissions when operating with each type of fuel for which you intend to certify the engine. In the case of flexible-fuel engines, measure emissions when operating with the fuel mixture that best represents in-use operation or is most likely to have the highest NO<sub>x</sub> emissions (or NO<sub>x</sub>+HC emissions for engines subject to NO<sub>x</sub>+HC standards), though you may ask us to instead to perform tests with both fuels separately if you can show that intermediate mixtures are not likely to occur in use.

\* \* \* \* \*

(c) \* \* \*

(4) Before we test one of your engines, we may calibrate it within normal production tolerances for anything we do not consider an adjustable parameter. For example, this would apply for an engine parameter that is subject to production variability because it is

adjustable during production, but is not considered an adjustable parameter (as defined in § 1042.901) because it is permanently sealed. For parameters that relate to a level of performance that is itself subject to a specified range (such as maximum power output), we will generally perform any calibration under this paragraph (c)(4) in a way that keeps performance within the specified range.

(d) \* \* \*

(1) The engine family from the previous model year differs from the current engine family only with respect to model year, items identified in § 1042.225(a), or other characteristics unrelated to emissions. We may waive this criterion for differences we determine not to be relevant.

\* \* \* \* \*

■ 172. Section 1042.240 is amended by revising paragraph (c)(3), adding paragraphs (c)(4) and (5), and revising paragraph (d) to read as follows:

**§ 1042.240 Demonstrating compliance with exhaust emission standards.**

\* \* \* \* \*

(c) \* \* \*

(3) *Sawtooth deterioration patterns.*

The deterioration factors described in paragraphs (c)(1) and (2) of this section assume that the highest useful life emissions occur either at the end of useful life or at the low-hour test point. The provisions of this paragraph (c)(3) apply where good engineering judgment indicates that the highest emissions over the useful life will occur between these two points. For example, emissions may increase with service accumulation until a certain maintenance step is performed, then return to the low-hour emission levels and begin increasing again. Base deterioration factors for engines with such emission patterns on the difference between (or ratio of) the point of the sawtooth at which the highest emissions occur and the low-hour test point. Note that this applies for maintenance-related deterioration only where we allow such critical emission-related maintenance.

(4) *Deterioration factor for crankcase emissions.* If your engine vents crankcase emissions to the exhaust or to the atmosphere, you must account for crankcase emission deterioration, using good engineering judgment. You may use separate deterioration factors for crankcase emissions of each pollutant (either multiplicative or additive) or include the effects in combined deterioration factors that include exhaust and crankcase emissions together for each pollutant.

(5) *Dual-fuel and flexible-fuel engines.* In the case of dual-fuel and flexible-fuel engines, apply deterioration factors

separately for each fuel type. You may accumulate service hours on a single emission-data engine using the type of fuel or the fuel mixture expected to have the highest combustion and exhaust temperatures; you may ask us to approve a different fuel mixture if you demonstrate that a different criterion is more appropriate.

(d) Determine the official emission result for each pollutant to at least one more decimal place than the applicable standard. Apply the deterioration factor to the official emission result, as described in paragraph (c) of this section, then round the adjusted figure to the same number of decimal places as the emission standard. Compare the rounded emission levels to the emission standard for each emission-data engine. In the case of NO<sub>x</sub>+HC standards, apply the deterioration factor to each pollutant and then add the results before rounding.

\* \* \* \* \*

■ 173. Section 1042.250 is amended by revising paragraphs (b)(3)(iv) and (c) to read as follows:

**§ 1042.250 Recordkeeping and reporting.**

\* \* \* \* \*

(b) \* \* \*

(3) \* \* \*

(iv) All your emission tests, including the date and purpose of each test and documentation of test parameters as specified in part 40 CFR part 1065.

\* \* \* \* \*

(c) Keep required data from emission tests and all other information specified in this section for eight years after we issue your certificate. If you use the same emission data or other information for a later model year, the eight-year period restarts with each year that you continue to rely on the information.

\* \* \* \* \*

■ 174. Section 1042.255 is amended by revising paragraphs (c)(2), (d), and (e) to read as follows:

**§ 1042.255 EPA decisions.**

\* \* \* \* \*

(c) \* \* \*

(2) Submit false or incomplete information (paragraph (e) of this section applies if this is fraudulent). This includes doing anything after submission of your application to render any of the submitted information false or incomplete.

\* \* \* \* \*

(d) We may void the certificate of conformity for an engine family if you fail to keep records, send reports, or give us information as required under this part or the Clean Air Act. Note that these are also violations of 40 CFR 1068.101(a)(2).



(e) We may void your certificate if we find that you intentionally submitted false or incomplete information. This includes rendering submitted information false or incomplete after submission.

\* \* \* \* \*

#### Subpart D—Testing Production-Line Engines

■ 175. Section 1042.302 is amended by revising paragraph (a) to read as follows:

##### § 1042.302 Applicability of this subpart for Category 3 engines.

\* \* \* \* \*

(a) You must test each Category 3 engine at the sea trial of the vessel in which it is installed or within the first 300 hours of operation, whichever occurs first. This may involve testing a fully assembled production engine before it is installed in the vessel. Since you must test each engine, the provisions of §§ 1042.310 and 1042.315(b) do not apply for Category 3 engines. If we determine that an engine failure under this subpart is caused by defective components or design deficiencies, we may revoke or suspend your certificate for the engine family as described in § 1042.340. If we determine that an engine failure under this subpart is caused only by incorrect assembly, we may suspend your certificate for the engine family as described in § 1042.325. If the engine fails, you may continue operating only to complete the sea trial and return to port. It is a violation of 40 CFR 1068.101(b)(1) to operate the vessel further until you remedy the cause of failure. Each two-hour period of such operation constitutes a separate offense. A violation lasting less than two hours constitutes a single offense.

\* \* \* \* \*

#### Subpart F—Test Procedures

■ 176. Section 1042.501 is amended by revising paragraphs (d), (e), and (f) and adding paragraph (h) to read as follows:

##### § 1042.501 How do I run a valid emission test?

\* \* \* \* \*

(d) Adjust measured emissions to account for aftertreatment technology with infrequent regeneration as described in § 1042.525.

(e) Duty-cycle testing is limited to atmospheric pressures between 91.000 and 103.325 kPa.

(f) You may use special or alternate procedures to the extent we allow them under 40 CFR 1065.10.

\* \* \* \* \*

(h) This subpart is addressed to you as a manufacturer, but it applies equally to anyone who does testing for you, and to us when we perform testing to determine if your engines meet emission standards.

■ 177. Section 1042.505 is amended by revising paragraph (b)(5)(iii) to read as follows:

##### § 1042.505 Testing engines using discrete-mode or ramped-modal duty cycles.

\* \* \* \* \*

(b) \* \* \*

(5) \* \* \*

(iii) Use the 8-mode duty cycle or the corresponding ramped-modal cycle described in 40 CFR part 1039, Appendix II, paragraph (c) for variable-speed auxiliary engines with maximum engine power at or above 19 kW that are not propeller-law engines.

\* \* \* \* \*

■ 178. Section 1042.515 is amended by revising paragraphs (f)(2), (f)(4), and (g) to read as follows:

##### § 1042.515 Test procedures related to not-exceed standards.

\* \* \* \* \*

(f) \* \* \*

(2) You may ask us to approve a Limited Testing Region (LTR). An LTR is a region of engine operation, within the applicable NTE zone, where you have demonstrated that your engine family operates for no more than 5.0 percent of its normal in-use operation, on a time-weighted basis. You must specify an LTR using boundaries based on engine speed and power (or torque), where the LTR boundaries must coincide with some portion of the boundary defining the overall NTE zone. Any emission data collected within an LTR for a time duration that exceeds 5.0 percent of the duration of its respective NTE sampling period will be excluded when determining compliance with the applicable NTE standards. Any emission data collected within an LTR for a time duration of 5.0 percent or less of the duration of the respective NTE sampling period will be included when determining compliance with the NTE standards.

\* \* \* \* \*

(4) You may exclude emission data based on catalytic aftertreatment temperatures as follows:

(i) For an engine equipped with a catalytic NO<sub>x</sub> aftertreatment system, exclude NO<sub>x</sub> emission data that is collected when the exhaust temperature at any time during the NTE event is less than 250 °C.

(ii) For an engine equipped with an oxidizing catalytic aftertreatment system, exclude HC and CO emission

data that is collected when the exhaust temperature at any time during the NTE event is less than 250 °C. Also exclude PM emission data if the applicable PM standard (or family emission limit) is above 0.06 g/kW-hr. Where there are parallel paths, measure the temperature 30 cm downstream of the last oxidizing aftertreatment device in the path with the greatest exhaust flow.

(iii) Measure exhaust temperature within 30 cm downstream of the last applicable catalytic aftertreatment device. Where there are parallel paths, use good engineering judgment to measure the temperature within 30 cm downstream of the last applicable catalytic aftertreatment device in the path with the greatest exhaust flow.

(g) Emission sampling is not valid for NTE testing if it includes any active regeneration, unless the emission averaging period includes the complete regeneration event(s) and the full period of engine operation until the start of the next regeneration event. This provision applies only for engines that send an electronic signal indicating the start of the regeneration event.

■ 179. Section 1042.525 is revised to read as follows:

##### § 1042.525 How do I adjust emission levels to account for infrequently regenerating aftertreatment devices?

For engines using aftertreatment technology with infrequent regeneration events that may occur during testing, take one of the following approaches to account for the emission impact of regeneration, or use an alternate methodology that we approve for Category 3 engines:

(a) You may use the calculation methodology described in 40 CFR 1065.680 to adjust measured emission results. Do this by developing an upward adjustment factor and a downward adjustment factor for each pollutant based on measured emission data and observed regeneration frequency as follows:

(1) Adjustment factors should generally apply to an entire engine family, but you may develop separate adjustment factors for different configurations within an engine family. Use the adjustment factors from this section in all testing for the engine family.

(2) You may use carryover or carry-across data to establish adjustment factors for an engine family as described in § 1042.235, consistent with good engineering judgment.

(3) Determine the frequency of regeneration, *F*, as described in 40 CFR 1065.680 from in-use operating data or from running repetitive tests in a

laboratory. If the engine is designed for regeneration at fixed time intervals, you may apply good engineering judgment to determine *F* based on those design parameters.

(4) Identify the value of *F* in each application for certification for which it applies.

(b) You may ask us to approve an alternate methodology to account for regeneration events. We will generally limit approval to cases where your engines use aftertreatment technology with extremely infrequent regeneration and you are unable to apply the provisions of this section.

(c) You may choose to make no adjustments to measured emission results if you determine that regeneration does not significantly affect emission levels for an engine family (or configuration) or if it is not practical to identify when regeneration occurs. If you choose not to make adjustments under paragraph (a) or (b) of this section, your engines must meet emission standards for all testing, without regard to regeneration.

#### Subpart G—Special Compliance Provisions

■ 180. Section 1042.601 is amended by adding paragraph (j) to read as follows:

##### § 1042.601 General compliance provisions for marine engines and vessels.

\* \* \* \* \*

(j) Subpart C of this part describes how to test and certify dual-fuel and flexible-fuel engines. Some multi-fuel engines may not fit either of those defined terms. For such engines, we will determine whether it is most appropriate to treat them as single-fuel engines, dual-fuel engines, or flexible-fuel engines based on the range of possible and expected fuel mixtures. For example, an engine might burn natural gas but initiate combustion with a pilot injection of diesel fuel. If the engine is designed to operate with a single fueling algorithm (*i.e.*, fueling rates are fixed at a given engine speed and load condition), we would generally treat it as a single-fuel engine. In this context, the combination of diesel fuel and natural gas would be its own fuel type. If the engine is designed to also operate on diesel fuel alone, we would generally treat it as a dual-fueled engine. If the engine is designed to operate on varying mixtures of the two fuels, we would generally treat it as a flexible-fueled engine. To the extent that requirements vary for the different fuels or fuel mixtures, we may apply the more stringent requirements.

■ 181. Section 1042.605 is amended by revising paragraphs (e)(3) to read as follows:

##### § 1042.605 Dressing engines already certified to other standards for nonroad or heavy-duty highway engines for marine use.

\* \* \* \* \*

(e) \* \* \*

(3) Send the Designated Compliance Officer written notification describing your plans before using the provisions of this section. In addition, by February 28 of each calendar year (or less often if we tell you), send the Designated Compliance Officer a signed letter with all the following information:

(i) Identify your full corporate name, address, and telephone number.

(ii) List the engine models for which you used this exemption in the previous year and describe your basis for meeting the sales restrictions of paragraph (d)(4) of this section.

(iii) State: “We prepared each listed engine model for marine application without making any changes that could increase its certified emission levels, as described in 40 CFR 1042.605.”

\* \* \* \* \*

■ 182. Section 1042.610 is amended by revising paragraph (e)(2) to read as follows:

##### § 1042.610 Certifying auxiliary marine engines to land-based standards.

\* \* \* \* \*

(e) \* \* \*

(2) Send the Designated Compliance Officer written notification describing your plans before using the provisions of this section. In addition, by February 28 of each calendar year (or less often if we tell you), send the Designated Compliance Officer a signed letter with all the following information:

(i) Identify your full corporate name, address, and telephone number.

(ii) List the engine models for which you used this exemption in the previous year and describe your basis for meeting the sales restrictions of paragraph (d)(3) of this section.

(iii) State: “We prepared each listed engine model for marine application without making any changes that could increase its certified emission levels, as described in 40 CFR 1042.610.”

\* \* \* \* \*

■ 183. Section 1042.630 is amended by revising paragraph (f) to read as follows:

##### § 1042.630 Personal-use exemption.

\* \* \* \* \*

(f) The vessel must be a vessel that is not classed or subject to Coast Guard inspections or surveys. Note that dockside examinations performed by

the Coast Guard are not considered inspections (see 46 U.S.C. 3301 and 46 U.S.C. 4502).

##### § 1042.640 [Removed]

■ 184. Section 1042.640 is removed.

■ 185. Section 1042.650 is amended by revising paragraphs (a) and (d) to read as follows:

##### § 1042.650 Migratory vessels.

\* \* \* \* \*

(a) *Temporary exemption.* A vessel owner may ask us for a temporary exemption from the tampering prohibition in 40 CFR 1068.101(b)(1) for a vessel if it will operate for an extended period outside the United States where ULSD is not available. In your request, describe where the vessel will operate, how long it will operate there, why ULSD will be unavailable, and how you will modify the engine, including its emission controls. If we approve your request, you may modify the engine, but only as needed to disable or remove the emission controls needed for meeting the Tier 4 standards. You must return the engine to its original certified configuration before the vessel returns to the United States to avoid violating the tampering prohibition in 40 CFR 1068.101(b)(1). We may set additional conditions to prevent circumvention of the provisions of this part.

\* \* \* \* \*

(d) *Auxiliary engines on Category 3 vessels.* Auxiliary engines that will be installed on vessels with Category 3 propulsion engines qualify for an exemption from the standards of this part provided all the following conditions are met:

(1) To be eligible for this exemption, the engine must meet all of the following criteria.

(i) The engine must be certified to the applicable NO<sub>x</sub> standards of Annex VI and meet all other applicable requirements of 40 CFR part 1043. Engines installed on vessels constructed on or after January 1, 2016 must conform fully to the Annex VI Tier III NO<sub>x</sub> standards as described in 40 CFR part 1043 and meet all other applicable requirements in 40 CFR part 1043. Engines that would otherwise be subject to the Tier 4 standards of this part must also conform fully to the Annex VI Tier III NO<sub>x</sub> standards as described in 40 CFR part 1043.

(ii) The engine may not be used for propulsion (except for emergency engines).

(iii) Engines certified to the Annex VI Tier III standards may be equipped with on-off NO<sub>x</sub> controls, as long as they conform to the requirements of §§ 1042.110(d) and 1042.115(g);

however, the engines must comply fully with the Annex VI Tier II standards when the emission controls are disabled, and meet any other requirements that apply under Annex VI.

(2) You must notify the Designated Compliance Officer of your intent to use this exemption before you introduce engines into U.S. commerce, not later than the time that you apply for an EIAPP certificate for the engine under 40 CFR part 1043.

(3) The remanufactured engine requirements of subpart I of this part do not apply.

(4) If you introduce an engine into U.S. commerce under this paragraph (d), you must meet the labeling requirements in § 1042.135, but add the following statement instead of the compliance statement in § 1042.135(c)(10):

THIS ENGINE DOES NOT COMPLY WITH CURRENT U.S. EPA EMISSION STANDARDS UNDER 40 CFR 1042.650 AND IS FOR USE SOLELY IN VESSELS WITH CATEGORY 3 PROPULSION ENGINES. INSTALLATION OR USE OF THIS ENGINE IN ANY OTHER APPLICATION MAY BE A VIOLATION OF FEDERAL LAW SUBJECT TO CIVIL PENALTY.

(5) The reporting requirements of § 1042.660 apply for engines exempted under this paragraph (d).

■ 186. Section 1042.655 is amended by revising the section heading and paragraph (b) to read as follows:

**§ 1042.655 Special certification provisions for Category 3 engines with aftertreatment.**

\* \* \* \* \*

(b) *Required testing.* The emission-data engine must be tested as specified in subpart F of this part to verify that the engine-out emissions comply with the Tier 2 standards. The catalyst material or other aftertreatment device must be tested under conditions that accurately represent actual engine conditions for the test points. This catalyst or aftertreatment testing may be performed on a benchscale.

\* \* \* \* \*

■ 187. Section 1042.660 is amended by revising paragraphs (b) and (c)(1) to read as follows:

**§ 1042.660 Requirements for vessel manufacturers, owners, and operators.**

\* \* \* \* \*

(b) For vessels equipped with SCR systems requiring the use of urea or other reductants, owners and operators must report to the Designated Enforcement Officer within 30 days any operation of such vessels without the appropriate reductant. This includes

vessels with auxiliary engines certified to Annex VI standards under § 1042.650(d). Failure to comply with the requirements of this paragraph is a violation of 40 CFR 1068.101(a)(2). Note that such operation is a violation of 40 CFR 1068.101(b)(1).

(c) \* \* \*

(1) The requirements of this paragraph (c)(1) apply only for Category 3 engines. All maintenance, repair, adjustment, and alteration of Category 3 engines subject to the provisions of this part performed by any owner, operator or other maintenance provider must be performed using good engineering judgment, in such a manner that the engine continues (after the maintenance, repair, adjustment or alteration) to meet the emission standards it was certified as meeting prior to the need for service. This includes but is not limited to complying with the maintenance instructions described in § 1042.125. Adjustments are limited to the range specified by the engine manufacturer in the approved application for certification. Note that where a repair (or other maintenance) cannot be completed while at sea, it is not a violation to continue operating the engine to reach your destination.

\* \* \* \* \*

■ 188. Section 1042.670 is amended by revising paragraph (d) to read as follows:

**§ 1042.670 Special provisions for gas turbine engines.**

\* \* \* \* \*

(d) *Equivalent displacement.* Apply displacement-based provisions of this part by calculating an equivalent displacement from maximum engine power. The equivalent per-cylinder displacement (in liters) equals maximum engine power in kW multiplied by 0.00311, except that all gas turbines with maximum engine power above 9,300 kW are considered to have an equivalent per-cylinder displacement of 29.0 liters. Also, determine the appropriate Tier 3 standards for Category 1 engines based on the engine having an equivalent power density below 35 kW per liter.

\* \* \* \* \*

**Subpart H—Averaging, Banking, and Trading for Certification**

■ 189. Section 1042.701 is amended by adding paragraphs (j) and (k) to read as follows:

**§ 1042.701 General provisions.**

\* \* \* \* \*

(j) NO<sub>x</sub>+HC and PM credits generated under 40 CFR part 94 may be used

under this part in the same manner as NO<sub>x</sub>+HC and PM credits generated under this part.

(k) You may use either of the following approaches to retire or forego emission credits:

(1) You may retire emission credits generated from any number of your engines. This may be considered donating emission credits to the environment. Identify any such credits in the reports described in § 1042.730. Engines must comply with the applicable FELs even if you donate or sell the corresponding emission credits under this paragraph (k). Those credits may no longer be used by anyone to demonstrate compliance with any EPA emission standards.

(2) You may certify a family using an FEL below the emission standard as described in this part and choose not to generate emission credits for that family. If you do this, you do not need to calculate emission credits for those families and you do not need to submit or keep the associated records described in this subpart for that family.

■ 190. Section 1042.705 is amended by revising paragraph (c) to read as follows:

**§ 1042.705 Generating and calculating emission credits.**

\* \* \* \* \*

(c) As described in § 1042.730, compliance with the requirements of this subpart is determined at the end of the model year based on actual U.S.-directed production volumes. Do not include any of the following engines to calculate emission credits:

(1) Engines with a permanent exemption under subpart G of this part or under 40 CFR part 1068.

(2) Exported engines.

(3) Engines not subject to the requirements of this part, such as those excluded under § 1042.5.

(4) [Reserved]

(5) Any other engines, where we indicate elsewhere in this part 1042 that they are not to be included in the calculations of this subpart.

■ 191. Section 1042.710 is amended by revising paragraph (c) to read as follows:

**§ 1042.710 Averaging emission credits.**

\* \* \* \* \*

(c) If you certify an engine family to an FEL that exceeds the otherwise applicable emission standard, you must obtain enough emission credits to offset the engine family's deficit by the due date for the final report required in § 1042.730. The emission credits used to address the deficit may come from your other engine families that generate emission credits in the same model year, from emission credits you have

banked from previous model years, or from emission credits generated in the same or previous model years that you obtained through trading.

■ 192. Section 1042.725 is amended by revising paragraph (b)(2) to read as follows:

**§ 1042.725 Information required for the application for certification.**

\* \* \* \* \*

(b) \* \* \*

(2) Detailed calculations of projected emission credits (positive or negative) based on projected production volumes. We may require you to include similar calculations from your other engine families to demonstrate that you will be able to avoid negative credit balances for the model year. If you project negative emission credits for a family, state the source of positive emission credits you expect to use to offset the negative emission credits.

■ 193. Section 1042.730 is amended by revising paragraphs (b) and (c)(2) to read as follows:

**§ 1042.730 ABT reports.**

\* \* \* \* \*

(b) Your end-of-year and final reports must include the following information for each engine family participating in the ABT program:

(1) Engine-family designation and averaging set.

(2) The emission standards that would otherwise apply to the engine family.

(3) The FEL for each pollutant. If you change the FEL after the start of production, identify the date that you started using the new FEL and/or give the engine identification number for the first engine covered by the new FEL. In this case, identify each applicable FEL and calculate the positive or negative emission credits as specified in § 1042.225.

(4) The projected and actual U.S.-directed production volumes for the model year, as described in § 1042.705(c). If you changed an FEL during the model year, identify the actual U.S.-directed production volume associated with each FEL.

(5) Maximum engine power for each engine configuration, and the average engine power weighted by U.S.-directed production volumes for the engine family.

(6) Useful life.

(7) Calculated positive or negative emission credits for the whole engine family. Identify any emission credits that you traded, as described in paragraph (d)(1) of this section.

(c) \* \* \*

(2) State whether you will retain any emission credits for banking. If you

choose to retire emission credits that would otherwise be eligible for banking, identify the engine families that generated the emission credits, including the number of emission credits from each family.

\* \* \* \* \*

■ 194. Section 1042.735 is amended by revising paragraphs (a) and (b) to read as follows:

**§ 1042.735 Recordkeeping.**

(a) You must organize and maintain your records as described in this section.

(b) Keep the records required by this section for at least eight years after the due date for the end-of-year report. You may not use emission credits for any engines if you do not keep all the records required under this section. You must therefore keep these records to continue to bank valid credits.

\* \* \* \* \*

**Subpart I—Special Provisions for Remanufactured Marine Engines**

■ 195. Section 1042.810 is amended by revising paragraph (c) to read as follows:

**§ 1042.810 Requirements for owner/operators and installers during remanufacture.**

\* \* \* \* \*

(c) Your engine is not subject to the standards of this subpart if we determine that no certified remanufacturing system is available for your engine as described in § 1042.815. For engines that are remanufactured during multiple events within a five-year period, you are not required to use a certified system until all of your engine's cylinders have been replaced after the system became available. For example, if you remanufacture your 16-cylinder engine by replacing four cylinders each January and a system becomes available for your engine June 1, 2010, your engine must be in a certified configuration when you replace four cylinders in January of 2014. At that point, all 16 cylinders would have been replaced after June 1, 2010.

\* \* \* \* \*

■ 196. Section 1042.830 is revised to read as follows:

**§ 1042.830 Labeling.**

(a) The labeling requirements of this paragraph (a) apply for remanufacturing that is subject to the standards of this subpart. At the time of remanufacture, affix a permanent and legible label identifying each engine. The label must be—

(1) Attached in one piece so it is not removable without being destroyed or defaced.

(2) Secured to a part of the engine needed for normal operation and not normally requiring replacement.

(3) Durable and readable for the engine's entire useful life.

(4) Written in English.

(b) The label required under paragraph (a) of this section must—

(1) Include the heading "EMISSION CONTROL INFORMATION".

(2) Include your full corporate name and trademark.

(3) Include EPA's standardized designation for the engine family.

(4) State the engine's category, displacement (in liters or L/cyl), maximum engine power (in kW), and power density (in kW/L) as needed to determine the emission standards for the engine family. You may specify displacement, maximum engine power, and power density as ranges consistent with the ranges listed in § 1042.101. See § 1042.140 for descriptions of how to specify per-cylinder displacement, maximum engine power, and power density.

(5) State: "THIS MARINE ENGINE MEETS THE STANDARDS OF 40 CFR 1042, SUBPART I, FOR [CALENDAR YEAR OF REMANUFACTURE]."

(c) For remanufactured engines that are subject to this subpart as described in § 1042.801(a), but are not subject to remanufacturing standards as allowed by § 1042.810 or § 1042.815, you may voluntarily add a label as specified in paragraphs (a) and (b) of this section, except that the label must omit the standardized designation for the engine family and include the following alternative compliance statement: "THIS MARINE ENGINE IS NOT SUBJECT TO REMANUFACTURING STANDARDS UNDER 40 CFR 1042, SUBPART I, FOR [CALENDAR YEAR OF REMANUFACTURE]."

(d) You may add information to the emission control information label to identify other emission standards that the engine meets or does not meet (such as international standards). You may also add other information to ensure that the engine will be properly maintained and used.

(e) You may ask us to approve modified labeling requirements in this section if you show that it is necessary or appropriate. We will approve your request if your alternate label is consistent with the intent of the labeling requirements of this section.

■ 197. Section 1042.840 is amended by revising paragraphs (c) and (o) to read as follows:

#### § 1042.840 Application requirements for remanufactured engines.

(c) Summarize the cost effectiveness analysis used to demonstrate your system will meet the availability criteria of § 1042.815. Identify the maximum allowable costs for vessel modifications to meet the criteria.

(o) Report all valid test results. Also indicate whether there are test results from invalid tests or from any other tests of the emission-data engine, whether or not they were conducted according to the test procedures of subpart F of this part. If you measure CO<sub>2</sub>, report those emission levels. We may require you to report these additional test results. We may ask you to send other information to confirm that your tests were valid under the requirements of this part and 40 CFR part 1065.

#### Subpart J—Definitions and Other Reference Information

■ 198. Section 1042.901 is amended as follows:

■ a. By revising the definition of “Designated Compliance Officer”.

■ b. By adding definitions for “Designated Enforcement Officer”, “Dual-fuel”, and “Flexible-fuel”.

■ c. By revising the definition for “Low-sulfur diesel fuel”, “Model year”, and “Placed into service”.

■ d. By removing the definition for “Point of first retail sale”.

The revisions and additions read as follows:

#### § 1042.901 Definitions.

*Designated Compliance Officer* means the Director, Diesel Engine Compliance Center, U.S. Environmental Protection Agency, 2000 Traverwood Drive, Ann Arbor, MI 48105; [complianceinfo@epa.gov](mailto:complianceinfo@epa.gov); [epa.gov/otaq/verify](http://epa.gov/otaq/verify).

*Designated Enforcement Officer* means the Director, Air Enforcement Division (2242A), U.S. Environmental Protection Agency, 1200 Pennsylvania Ave. NW., Washington, DC 20460.

*Dual-fuel* means relating to an engine designed for operation on two different fuels but not on a continuous mixture of those fuels (see § 1042.601(j)). For purposes of this part, such an engine remains a dual-fuel engine even if it is designed for operation on three or more different fuels. Note that this definition differs from MARPOL Annex VI.

*Flexible-fuel* means relating to an engine designed for operation on any

mixture of two or more different fuels (see § 1042.601(j)).

*Low-sulfur diesel fuel* means one of the following:

(1) For in-use fuels, *low-sulfur diesel fuel* means a diesel fuel marketed as low-sulfur diesel fuel having a maximum sulfur concentration of 500 parts per million.

(2) For testing, *low-sulfur diesel fuel* has the meaning given in 40 CFR part 1065.

*Model year* means any of the following:

(1) For freshly manufactured marine engines (see definition of “new marine engine,” paragraph (1)), model year means one of the following:

(i) Calendar year of production.

(ii) Your annual new model production period if it is different than the calendar year. This must include January 1 of the calendar year for which the model year is named. It may not begin before January 2 of the previous calendar year and it must end by December 31 of the named calendar year. For seasonal production periods not including January 1, model year means the calendar year in which the production occurs, unless you choose to certify the applicable engine family with the following model year. For example, if your production period is June 1, 2010 through November 30, 2010, your model year would be 2010 unless you choose to certify the engine family for model year 2011.

(2) For an engine that is converted to a marine engine after being certified and placed into service as a motor vehicle engine, a nonroad engine that is not a marine engine, or a stationary engine, model year means the calendar year in which the engine was originally produced. For an engine that is converted to a marine engine after being placed into service as a motor vehicle engine, a nonroad engine that is not a marine engine, or a stationary engine without having been certified, model year means the calendar year in which the engine becomes a new marine engine. (See definition of “new marine engine,” paragraph (2)).

(3) For an uncertified marine engine excluded under § 1042.5 that is later subject to this part 1042 as a result of being installed in a different vessel, model year means the calendar year in which the engine was installed in the non-excluded vessel. For a marine engine excluded under § 1042.5 that is later subject to this part 1042 as a result of reflagging the vessel, model year means the calendar year in which the

engine was originally manufactured. For a marine engine that become new under paragraph (7) of the definition of “new marine engine,” model year means the calendar year in which the engine was originally manufactured. (See definition of “new marine engine,” paragraphs (3) and (7).)

(4) For engines that do not meet the definition of “freshly manufactured” but are installed in new vessels, model year means the calendar year in which the engine is installed in the new vessel (see definition of “new marine engine,” paragraph (4)).

(5) For remanufactured engines, model year means the calendar year in which the remanufacture takes place.

(6) For imported engines:

(i) For imported engines described in paragraph (6)(i) of the definition of “new marine engine,” *model year* has the meaning given in paragraphs (1) through (4) of this definition.

(ii) For imported engines described in paragraph (6)(ii) of the definition of “new marine engine,” *model year* means the calendar year in which the engine is remanufactured.

(iii) For imported engines described in paragraph (6)(iii) of the definition of “new marine engine,” *model year* means the calendar year in which the engine is first assembled in its imported configuration, unless specified otherwise in this part or in 40 CFR part 1068.

(iv) For imported engines described in paragraph (6)(iv) of the definition of “new marine engine,” *model year* means the calendar year in which the engine is imported.

(7) [Reserved]

(8) For freshly manufactured vessels, model year means the calendar year in which the keel is laid or the vessel is at a similar stage of construction. For vessels that become new under paragraph (2) or (3) of the definition of “new vessel” (as a result of modifications), model year means the calendar year in which the modifications physically begin.

*Placed into service* means put into initial use for its intended purpose. Engines and vessels do not qualify as being “placed into service” based on incidental use by a manufacturer or dealer.

■ 199. Section 1042.905 is revised to read as follows:

#### § 1042.905 Symbols, acronyms, and abbreviations.

The following symbols, acronyms, and abbreviations apply to this part:

ABT .....	Averaging, banking, and trading.
AECD .....	auxiliary emission control device.
CFR .....	Code of Federal Regulations.
CH <sub>4</sub> .....	methane.
CO .....	carbon monoxide.
CO <sub>2</sub> .....	carbon dioxide.
cyl .....	cylinder.
disp. ....	displacement.
ECA .....	Emission Control Area.
EEZ .....	Exclusive Economic Zone.
EPA .....	Environmental Protection Agency.
FEL .....	Family Emission Limit.
g .....	grams.
HC .....	hydrocarbon.
IMO .....	International Maritime Organization.
hr .....	hours.
kPa .....	kilopascals.
kW .....	kilowatts.
L .....	liters.
LTR .....	Limited Testing Region.
N <sub>2</sub> O .....	nitrous oxide.
NARA .....	National Archives and Records Administration.
NMHC .....	nonmethane hydrocarbon.
NO <sub>x</sub> .....	oxides of nitrogen (NO and NO <sub>2</sub> ).
NTE .....	not-to-exceed.
PM .....	particulate matter.
RPM .....	revolutions per minute.
SAE .....	Society of Automotive Engineers.
SCR .....	selective catalytic reduction.
THC .....	total hydrocarbon.
THCE .....	total hydrocarbon equivalent.
ULSD .....	ultra low-sulfur diesel fuel.
U.S.C. ....	United States Code.

■ 200. Section 1042.910 is revised to read as follows:

#### § 1042.910 Incorporation by reference.

(a) Certain material is incorporated by reference into this part with the approval of the Director of the Federal Register under 5 U.S.C. 552(a) and 1 CFR part 51. To enforce any edition other than that specified in this section, the Environmental Protection Agency must publish a notice of the change in the **Federal Register** and the material must be available to the public. All approved material is available for inspection at U.S. EPA, Air and Radiation Docket and Information Center, 1301 Constitution Ave. NW., Room B102, EPA West Building, Washington, DC 20460, (202) 202-1744, and is available from the sources listed below. It is also available for inspection at the National Archives and Records Administration (NARA). For information on the availability of this material at NARA, call 202-741-6030, or go to: <http://www.archives.gov/federal-register/code-of-federal-regulations/ibr-locations.html>.

(b) The International Maritime Organization, 4 Albert Embankment,

London SE1 7SR, United Kingdom, or [www.imo.org](http://www.imo.org), or 44-(0)20-7735-7611.

(1) MARPOL Annex VI, Regulations for the Prevention of Air Pollution from Ships, Third Edition, 2013, and NO<sub>x</sub> Technical Code 2008.

(i) Revised MARPOL Annex VI, Regulations for the Prevention of Pollution from Ships, Third Edition, 2013 ("2008 Annex VI"); IBR approved for § 1042.901.

(ii) NO<sub>x</sub> Technical Code 2008, Technical Code on Control of Emission of Nitrogen Oxides from Marine Diesel Engines, 2013 Edition, ("NO<sub>x</sub> Technical Code"); IBR approved for §§ 1042.104(g), 1042.230(d), 1042.302(c) and (e), 1042.501(g), and 1042.901.

(iii) Annex 12, Resolution MEPC.251(66) from the Report of the Marine Environment Protection Committee on its Sixty-Sixth Session, April 25, 2014. This document describes new and revised provisions that are considered to be part of Annex VI and NO<sub>x</sub> Technical Code 2008 as referenced in paragraphs (a)(1)(i) and (ii) of this section. IBR approved for §§ 1042.104(g), 1042.230(d), 1042.302(c) and (e), 1042.501(g), and 1042.901.

(2) [Reserved]

■ 201. Section 1042.915 is revised to read as follows:

#### § 1042.915 Confidential information.

The provisions of 40 CFR 1068.10 apply for information you consider confidential.

■ 202. Section 1042.925 is revised to read as follows:

#### § 1042.925 Reporting and recordkeeping requirements.

(a) This part includes various requirements to submit and record data or other information. Unless we specify otherwise, store required records in any format and on any media and keep them readily available for eight years after you send an associated application for certification, or eight years after you generate the data if they do not support an application for certification. You are expected to keep your own copy of required records rather than relying on someone else to keep records on your behalf. We may review these records at any time. You must promptly send us organized, written records in English if we ask for them. We may require you to submit written records in an electronic format.

(b) The regulations in § 1042.255, 40 CFR 1068.25, and 40 CFR 1068.101 describe your obligation to report truthful and complete information. This includes information not related to certification. Failing to properly report information and keep the records we

specify violates 40 CFR 1068.101(a)(2), which may involve civil or criminal penalties.

(c) Send all reports and requests for approval to the Designated Compliance Officer (see § 1042.801).

(d) Any written information we require you to send to or receive from another company is deemed to be a required record under this section. Such records are also deemed to be submissions to EPA. We may require you to send us these records whether or not you are a certificate holder.

(e) Under the Paperwork Reduction Act (44 U.S.C. 3501 *et seq.*), the Office of Management and Budget approves the reporting and recordkeeping specified in the applicable regulations. The following items illustrate the kind of reporting and recordkeeping we require for engines and vessels regulated under this part:

(1) We specify the following requirements related to engine certification in this part 1042:

(i) In § 1042.135 we require engine manufacturers to keep certain records related to duplicate labels sent to vessel manufacturers.

(ii) In § 1042.145 we state the requirements for interim provisions.

(iii) In subpart C of this part we identify a wide range of information required to certify engines.

(iv) In §§ 1042.345 and 1042.350 we specify certain records related to production-line testing.

(v) In subpart G of this part we identify several reporting and recordkeeping items for making demonstrations and getting approval related to various special compliance provisions.

(vi) In §§ 1042.725, 1042.730, and 1042.735 we specify certain records related to averaging, banking, and trading.

(vii) In subpart I of this part we specify certain records related to meeting requirements for remanufactured engines.

(2) We specify the following requirements related to testing in 40 CFR part 1065:

(i) In 40 CFR 1065.2 we give an overview of principles for reporting information.

(ii) In 40 CFR 1065.10 and 1065.12 we specify information needs for establishing various changes to published test procedures.

(iii) In 40 CFR 1065.25 we establish basic guidelines for storing test information.

(iv) In 40 CFR 1065.695 we identify the specific information and data items to record when measuring emissions.

(3) We specify the following requirements related to the general

compliance provisions in 40 CFR part 1068:

(i) In 40 CFR 1068.5 we establish a process for evaluating good engineering judgment related to testing and certification.

(ii) In 40 CFR 1068.25 we describe general provisions related to sending and keeping information.

(iii) In 40 CFR 1068.27 we require manufacturers to make engines available for our testing or inspection if we make such a request.

(iv) In 40 CFR 1068.105 we require vessel manufacturers to keep certain records related to duplicate labels from engine manufacturers.

(v) In 40 CFR 1068.120 we specify recordkeeping related to rebuilding engines.

(vi) In 40 CFR part 1068, subpart C, we identify several reporting and recordkeeping items for making demonstrations and getting approval related to various exemptions.

(vii) In 40 CFR part 1068, subpart D, we identify several reporting and recordkeeping items for making demonstrations and getting approval related to importing engines.

(viii) In 40 CFR 1068.450 and 1068.455 we specify certain records related to testing production-line

engines in a selective enforcement audit.

(ix) In 40 CFR 1068.501 we specify certain records related to investigating and reporting emission-related defects.

(x) In 40 CFR 1068.525 and 1068.530 we specify certain records related to recalling nonconforming engines.

■ 203. Appendix II is revised to read as follows:

#### Appendix II to Part 1042—Steady-State Duty Cycles

(a) The following duty cycles apply as specified in § 1042.505(b)(1):

(1) The following duty cycle applies for discrete-mode testing:

E3 mode No.	Engine speed <sup>1</sup>	Percent of maximum test power	Weighting factors
1 .....	Maximum test speed .....	100	0.2
2 .....	91% .....	75	0.5
3 .....	80% .....	50	0.15
4 .....	63% .....	25	0.15

<sup>1</sup> Maximum test speed is defined in 40 CFR part 1065. Percent speed values are relative to maximum test speed.

(2) The following duty cycle applies for ramped-modal testing:

RMC mode	Time in mode (seconds)	Engine speed <sup>1 3</sup>	Power (percent) <sup>2 3</sup>
1a Steady-state .....	229	Maximum test speed .....	100%.
1b Transition .....	20	Linear transition .....	Linear transition in torque.
2a Steady-state .....	166	63% .....	25%.
2b Transition .....	20	Linear transition .....	Linear transition in torque.
3a Steady-state .....	570	91% .....	75%.
3b Transition .....	20	Linear transition .....	Linear transition in torque.
4a Steady-state .....	175	80% .....	50%.

<sup>1</sup> Maximum test speed is defined in 40 CFR part 1065. Percent speed is relative to maximum test speed.

<sup>2</sup> The percent power is relative to the maximum test power.

<sup>3</sup> Advance from one mode to the next within a 20-second transition phase. During the transition phase, command a linear progression from the torque setting of the current mode to the torque setting of the next mode, and simultaneously command a similar linear progression for engine speed if there is a change in speed setting.

(b) The following duty cycles apply as specified in § 1042.505(b)(2):

(1) The following duty cycle applies for discrete-mode testing:

E5 mode No.	Engine speed <sup>1</sup>	Percent of maximum test power	Weighting factors
1 .....	Maximum test speed .....	100	0.08
2 .....	91% .....	75	0.13
3 .....	80% .....	50	0.17
4 .....	63% .....	25	0.32
5 .....	Warm idle .....	0	0.3

<sup>1</sup> Maximum test speed is defined in 40 CFR part 1065. Percent speed values are relative to maximum test speed.

(2) The following duty cycle applies for ramped-modal testing:

RMC mode	Time in mode (seconds)	Engine speed <sup>1 3</sup>	Power (percent) <sup>2 3</sup>
1a Steady-state .....	167	Warm idle .....	0%.
1b Transition .....	20	Linear transition .....	Linear transition in torque.
2a Steady-state .....	85	Maximum test speed .....	100%.
2b Transition .....	20	Linear transition .....	Linear transition in torque.
3a Steady-state .....	354	63% .....	25%.
3b Transition .....	20	Linear transition .....	Linear transition in torque.
4a Steady-state .....	141	91% .....	75%.
4b Transition .....	20	Linear transition .....	Linear transition in torque.
5a Steady-state .....	182	80% .....	50%.
5b Transition .....	20	Linear transition .....	Linear transition in torque.
6 Steady-state .....	171	Warm idle .....	0%.

<sup>1</sup> Maximum test speed is defined in 40 CFR part 1065. Percent speed is relative to maximum test speed.

<sup>2</sup> The percent power is relative to the maximum test power.

<sup>3</sup> Advance from one mode to the next within a 20-second transition phase. During the transition phase, command a linear progression from the torque setting of the current mode to the torque setting of the next mode, and simultaneously command a similar linear progression for engine speed if there is a change in speed setting.

(c) The following duty cycles apply as specified in § 1042.505(b)(3):

(1) The following duty cycle applies for discrete-mode testing:

E2 mode No.	Engine speed <sup>1</sup>	Torque (percent) <sup>2</sup>	Weighting factors
1 .....	Engine Governed .....	100	0.2
2 .....	Engine Governed .....	75	0.5
3 .....	Engine Governed .....	50	0.15
4 .....	Engine Governed .....	25	0.15

<sup>1</sup> Speed terms are defined in 40 CFR part 1065.

<sup>2</sup> The percent torque is relative to the maximum test torque as defined in 40 CFR part 1065.

(2) The following duty cycle applies for ramped-modal testing:

RMC mode	Time in mode (seconds)	Engine speed	Torque (percent) <sup>1 2</sup>
1a Steady-state .....	229	Engine Governed .....	100%.
1b Transition .....	20	Engine Governed .....	Linear transition.
2a Steady-state .....	166	Engine Governed .....	25%.
2b Transition .....	20	Engine Governed .....	Linear transition.
3a Steady-state .....	570	Engine Governed .....	75%.
3b Transition .....	20	Engine Governed .....	Linear transition.
4a Steady-state .....	175	Engine Governed .....	50%.

<sup>1</sup> The percent torque is relative to the maximum test torque as defined in 40 CFR part 1065.

<sup>2</sup> Advance from one mode to the next within a 20-second transition phase. During the transition phase, command a linear progression from the torque setting of the current mode to the torque setting of the next mode.

■ 204. Appendix III is revised to read as follows:

#### Appendix III to Part 1042—Not-To-Exceed Zones

(a) The following definitions apply for this Appendix III:

(1) *Percent power* means the percentage of the maximum power achieved at Maximum Test Speed (or at Maximum Test Torque for constant-speed engines).

(2) *Percent speed* means the percentage of Maximum Test Speed.

(b) Figure 1 of this Appendix illustrates the default NTE zone for marine engines certified

using the duty cycle specified in § 1042.505(b)(1), except for variable-speed propulsion marine engines used with controllable-pitch propellers or with electrically coupled propellers, as follows:

(1) Subzone 1 is defined by the following boundaries:

(i)  $\text{Percent power} \div 100 \geq 0.7 \cdot (\text{percent speed} \div 100)^{2.5}$ .

(ii)  $\text{Percent power} \div 100 \leq (\text{percent speed} \div 90)^{3.5}$ .

(iii)  $\text{Percent power} \div 100 \geq 3.0 \cdot (1 - \text{percent speed} \div 100)$ .

(2) Subzone 2 is defined by the following boundaries:

(i)  $\text{Percent power} \div 100 \geq 0.7 \cdot (\text{percent speed} \div 100)^{2.5}$ .

(ii)  $\text{Percent power} \div 100 \leq (\text{percent speed} \div 90)^{3.5}$ .

(iii)  $\text{Percent power} \div 100 < 3.0 \cdot (1 - \text{percent speed} \div 100)$ .

(iv)  $\text{Percent speed} \div 100 \geq 0.7$ .


(3) Note that the line separating Subzone 1 and Subzone 2 includes the following endpoints:

(i) Percent speed = 78.9 percent; Percent power = 63.2 percent.

(ii) Percent speed = 84.6 percent; Percent power = 46.1 percent.



Figure 1 of Appendix III — NTE Zone and Subzones for Propeller-Law Marine Engines

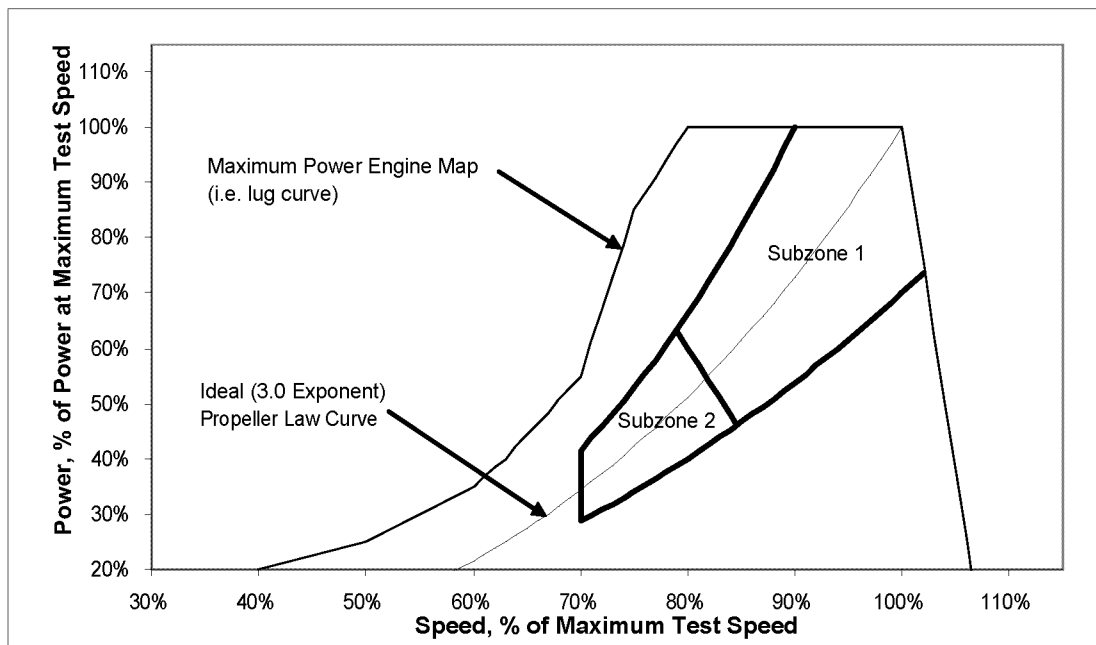

(c) Figure 2 of this Appendix illustrates the default NTE zone for recreational marine engines certified using the duty cycle specified in § 1042.505(b)(2), except for variable-speed marine engines used with controllable-pitch propellers or with electrically coupled propellers, as follows:

(1) Subzone 1 is defined by the following boundaries:

(i) Percent power  $\div 100 \geq 0.7 \cdot (\text{percent speed} \div 100)^{2.5}$ .

(ii) Percent power  $\div 100 \leq (\text{percent speed} \div 90)^{3.5}$ .

(iii) Percent power  $\div 100 \geq 3.0 \cdot (1 - \text{percent speed} \div 100)$ .

(iv) Percent power  $\leq 95$  percent.

(2) Subzone 2 is defined by the following boundaries:

(i) Percent power  $\div 100 \geq 0.7 \cdot (\text{percent speed} \div 100)^{2.5}$ .

(ii) Percent power  $\div 100 \leq (\text{percent speed} \div 90)^{3.5}$ .

(iii) Percent power  $\div 100 < 3.0 \cdot (1 - \text{percent speed} \div 100)$ .

(iv) Percent speed  $\geq 70$  percent.


(3) Subzone 3 is defined by the following boundaries:

(i) Percent power  $\div 100 \leq (\text{percent speed} \div 90)^{3.5}$ .

(ii) Percent power  $> 95$  percent.

(4) Note that the line separating Subzone 1 and Subzone 3 includes a point at Percent speed = 88.7 percent and Percent power = 95.0 percent. See paragraph (b)(3) of this appendix regarding the line separating Subzone 1 and Subzone 2.

Figure 2 of Appendix III — NTE Zone and Subzones for Propeller-Law Recreational Marine Engines

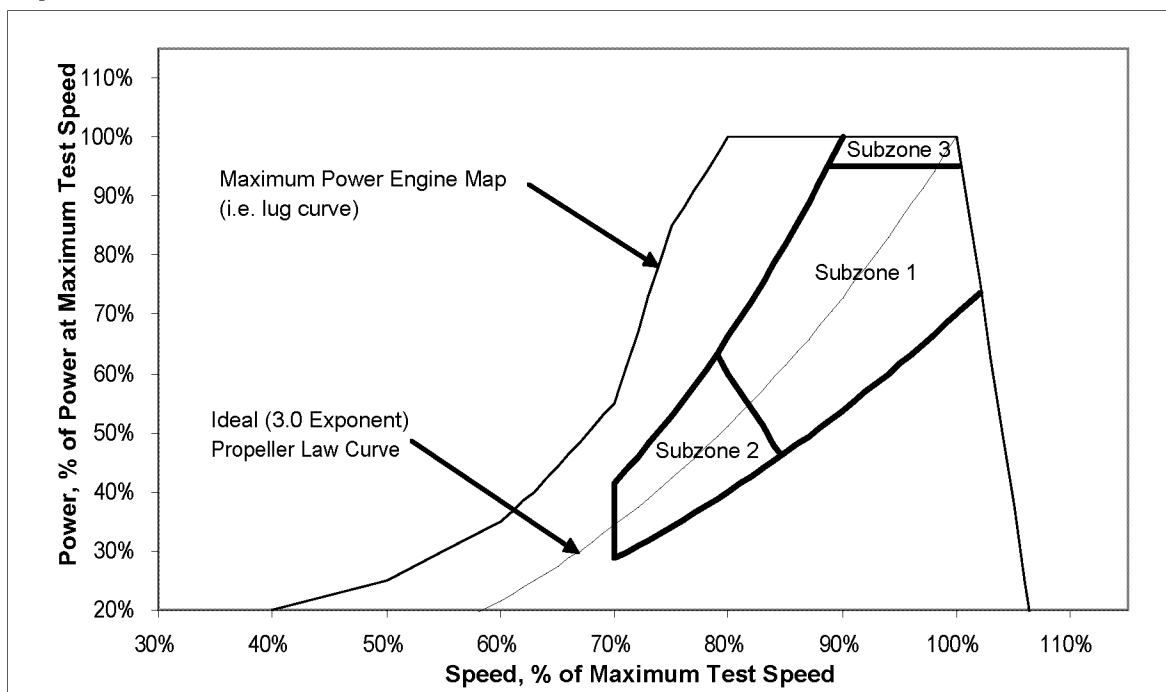

(d) Figure 3 of this Appendix illustrates the default NTE zone for variable-speed marine engines used with controllably-pitch propellers or with electrically coupled propellers that are certified using the duty cycle specified in § 1042.505(b)(1), (2), or (3), as follows:

(1) Subzone 1 is defined by the following boundaries:

- (i) Percent power  $\div 100 \geq 0.7 \cdot (\text{percent speed} \div 100)^{2.5}$ .
- (ii) Percent power  $\div 100 \geq 3.0 \cdot (1 - \text{percent speed} \div 100)$ .
- (iii) Percent speed  $\geq 78.9$  percent.

(2) Subzone 2a is defined by the following boundaries:

- (i) Percent power  $\div 100 \geq 0.7 \cdot (\text{percent speed} \div 100)^{2.5}$ .
- (ii) Percent speed  $\geq 70$  percent.
- (iii) Percent speed  $< 78.9$  percent, for Percent power  $> 63.3$  percent.
- (iv) Percent power  $\div 100 < 3.0 \cdot (1 - \text{percent speed} \div 100)$ , for Percent speed  $\geq 78.9$  percent.

(3) Subzone 2b is defined by the following boundaries:

- (i) The line formed by connecting the following two points on a plot of speed-vs.-power:

(A) Percent speed = 70 percent; Percent power = 28.7 percent.

(B) Percent power = 40 percent; Speed = governed speed.


(ii) Percent power  $\div 100 < 0.7 \cdot (\text{percent speed} \div 100)^{2.5}$ .

(4) Note that the line separating Subzone 1 and Subzone 2a includes the following endpoints:

(i) Percent speed = 78.9 percent; Percent power = 63.3 percent.

(ii) Percent speed = 84.6 percent; Percent power = 46.1 percent.

Figure 3 of Appendix III — NTE Zone and Subzones for Variable-Pitch or Electronically Coupled Engines\*

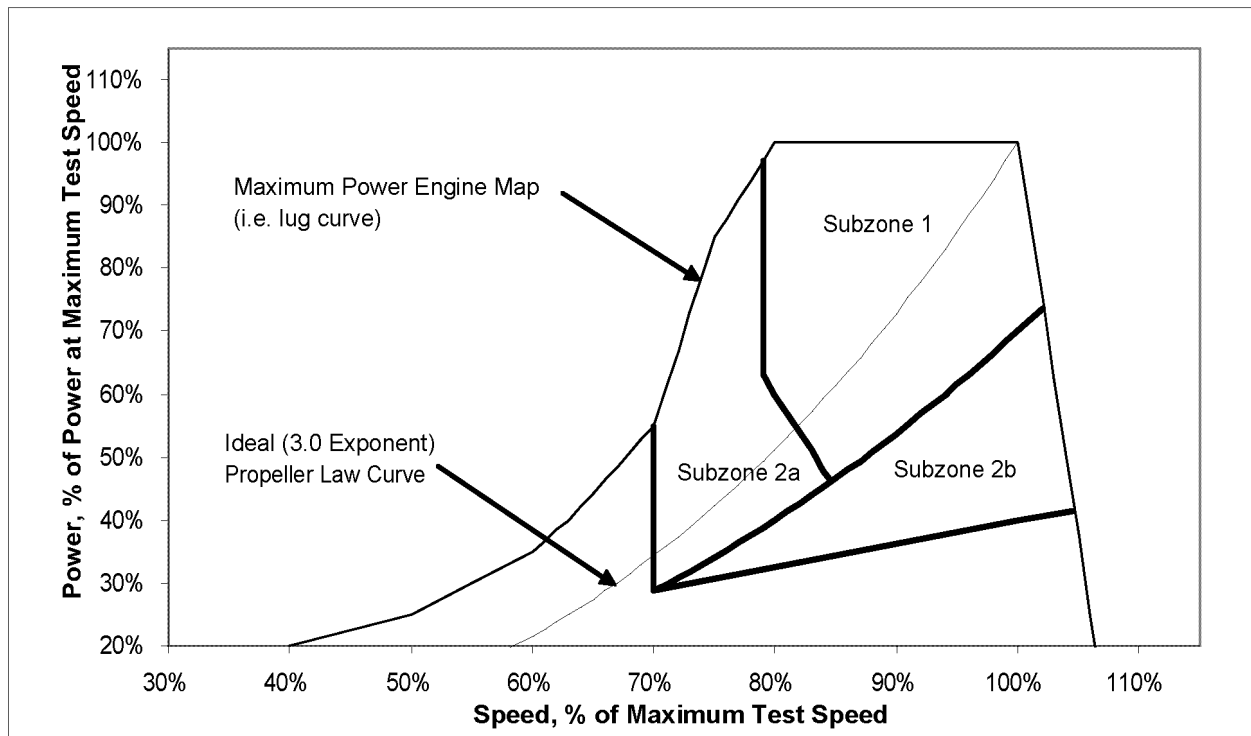


\*Shown for engines capable of operating on the E3 Duty Cycle.

(e) Figure 4 of this Appendix illustrates the default NTE zone for constant-speed engines certified using a duty cycle specified in § 1042.505(b)(3) or (b)(4), as follows:

- (1) Subzone 1 is defined by the following boundaries:
- (i) Percent power  $\geq 70$  percent.
  - (ii) [Reserved]

- (2) Subzone 2 is defined by the following boundaries:
- (i) Percent power  $< 70$  percent.
  - (ii) Percent power  $\geq 40$  percent.

Figure 4 of Appendix III — NTE Zone and Subzones for Constant-Speed Marine Engines

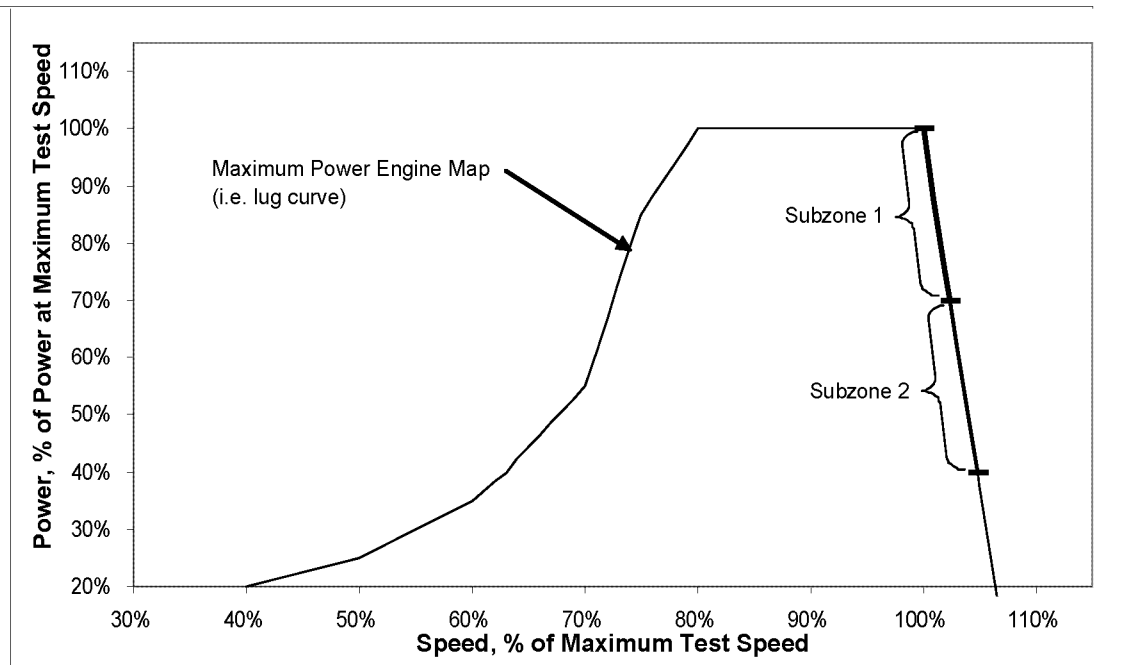


(f) Figure 5 of this Appendix illustrates the default NTE zone for variable-speed auxiliary marine engines certified using the duty cycle specified in § 1042.505(b)(5)(ii) or (iii), as follows:

(1) The default NTE zone is defined by the boundaries specified in 40 CFR 86.1370(b)(1), (2), and (4).

(2) A special PM subzone is defined in 40 CFR 1039.515(b).

Figure 5 of Appendix III — NTE Zone and Subzones for Variable-Speed Auxiliary Marine Engines (nonpropeller-law)

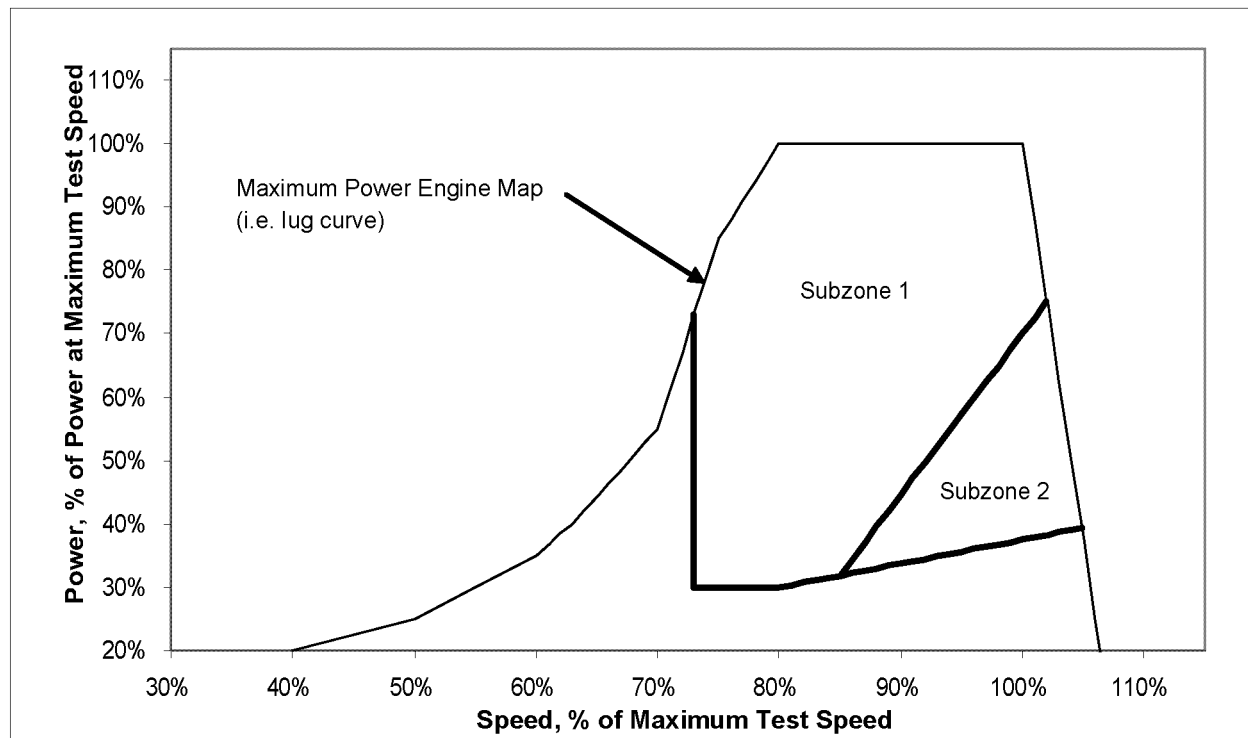

#### PART 1043—CONTROL OF NO<sub>x</sub>, SO<sub>x</sub>, AND PM EMISSIONS FROM MARINE ENGINES AND VESSELS SUBJECT TO THE MARPOL PROTOCOL

■ 205. The authority citation for part 1043 continues to read as follows:

**Authority:** 33 U.S.C. 1901–1912.

■ 206. Section 1043.60 is amended by revising paragraph (a) introductory text to read as follows:

##### § 1043.60 Operating requirements for engines and vessels subject to this part.

\* \* \* \* \*

(a) Except as specified otherwise in this part, NO<sub>x</sub> emission limits apply to all engines with power output of more than 130 kW that will be installed on vessels subject to this part as specified in the following table:

\* \* \* \* \*

■ 207. Section 1043.100 is revised to read as follows:

##### § 1043.100 Incorporation by reference.

(a) Certain material is incorporated by reference into this part with the approval of the Director of the Federal Register under 5 U.S.C. 552(a) and 1

CFR part 51. To enforce any edition other than that specified in this section, the Environmental Protection Agency must publish a notice of the change in the **Federal Register** and the material must be available to the public. All approved material is available for inspection at U.S. EPA, Air and Radiation Docket and Information Center, 1301 Constitution Ave. NW., Room B102, EPA West Building, Washington, DC 20460, (202) 202–1744, and is available from the sources listed below. It is also available for inspection at the National Archives and Records Administration (NARA). For information on the availability of this material at NARA, call 202–741–6030, or go to: [http://www.archives.gov/federal\\_register/code\\_of\\_federal\\_regulations/ibr\\_locations.html](http://www.archives.gov/federal_register/code_of_federal_regulations/ibr_locations.html).

(b) The International Maritime Organization, 4 Albert Embankment, London SE1 7SR, United Kingdom, or [www.imo.org](http://www.imo.org), or 44–(0)20–7735–7611.

(1) MARPOL Annex VI, Regulations for the Prevention of Air Pollution from Ships, Third Edition, 2013, and NO<sub>x</sub> Technical Code 2008.

(i) Revised MARPOL Annex VI, Regulations for the Prevention of Pollution from Ships, Third Edition, 2013 (“2008 Annex VI”); IBR approved for §§ 1043.1 introductory text, 1043.20, 1043.30(f), 1043.60(c), and 1043.70(a).

(ii) NO<sub>x</sub> Technical Code 2008, Technical Code on Control of Emission of Nitrogen Oxides from Marine Diesel Engines, 2013 Edition, (“NO<sub>x</sub> Technical Code”); IBR approved for §§ 1043.20, 1043.41(b) and (h), and 1043.70(a).

(iii) Annex 12, Resolution MEPC.251(66) from the Report of the Marine Environment Protection Committee on its Sixty-Sixth Session, April 25, 2014. This document describes new and revised provisions that are considered to be part of Annex VI and NO<sub>x</sub> Technical Code 2008 as referenced in paragraphs (a)(1)(i) and (ii) of this section. IBR approved for §§ 1043.1 introductory text, 1043.20, 1043.30(f), 1043.41(b) and (h), 1043.60(c), and 1043.70(a).

(2) [Reserved]

## PART 1065—ENGINE-TESTING PROCEDURES

■ 208. The authority citation for part 1065 continues to read as follows:

Authority: 42 U.S.C. 7401–7671q.

### Subpart A—Applicability and General Provisions

■ 209. Section 1065.15 is amended by revising paragraphs (a)(2)(ii) and (iv) to read as follows:

#### § 1065.15 Overview of procedures for laboratory and field testing.

\* \* \* \* \*

(a) \* \* \*

(2) \* \* \*

(ii) Nonmethane hydrocarbon, NMHC, which results from subtracting methane, CH<sub>4</sub>, from THC. You may choose to measure NMOG emissions to demonstrate compliance with NMHC standards.

\* \* \* \* \*

(iv) Nonmethane hydrocarbon-equivalent, NMHCE, which results from adjusting NMHC mathematically to be equivalent on a carbon-mass basis. You may choose to measure NMOG emissions to demonstrate compliance with NMHCE standards.

\* \* \* \* \*

### Subpart F—Performing an Emission Test in the Laboratory

■ 210. Section 1065.510 is amended by revising paragraphs (c) introductory text and (d)(5)(iii) to read as follows:

#### § 1065.510 Engine mapping.

\* \* \* \* \*

(c) *Negative torque mapping.* If your engine is subject to a reference duty cycle that specifies negative torque values (*i.e.*, engine motoring), generate a motoring torque curve by any of the following procedures:

\* \* \* \* \*

(d) \* \* \*

(5) \* \* \*

(iii) For any isochronous governed (0% speed droop) constant-speed engine, you may map the engine with two points as described in this paragraph (d)(5)(iii). After stabilizing at the no-load governed speed in paragraph (d)(4) of this section, record the mean feedback speed and torque. Continue to operate the engine with the governor or simulated governor controlling engine speed using operator demand, and control the dynamometer to target a speed of 99.5% of the

recorded mean no-load governed speed. Allow speed and torque to stabilize. Record the mean feedback speed and torque. Record the target speed. The absolute value of the speed error (the mean feedback speed minus the target speed) must be no greater than 0.1% of the recorded mean no-load governed speed. From this series of two mean feedback speed and torque values, use linear interpolation to determine intermediate values. Use this series of two mean feedback speeds and torques to generate a power map as described in paragraph (e) of this section. Note that the measured maximum test torque as determined in § 1065.610 (b)(1) will be the mean feedback torque recorded on the second point.

\* \* \* \* \*

### Subpart G—Calculations and Data Requirements

■ 211. Section 1065.610 is amended by revising paragraphs (a)(1)(ii), (a)(1)(iii), (a)(1)(vi), (b), and (c)(1) and (2) to read as follows:

#### § 1065.610 Duty cycle generation.

\* \* \* \* \*

(a) \* \* \*

(1) \* \* \*

(ii) Determine the lowest and highest engine speeds corresponding to 98% of  $P_{max}$ , using linear interpolation, and no extrapolation, as appropriate.

(iii) Determine the engine speed corresponding to maximum power,  $f_{nP_{max}}$ , by calculating the average of the two speed values from paragraph (a)(1)(ii) of this section. If there is only one speed where power is equal to 98% of  $P_{max}$ , take  $f_{nP_{max}}$  as the speed at which  $P_{max}$  occurs.

\* \* \* \* \*

(vi) Determine the lowest and highest engine speeds corresponding to the value calculated in paragraph (a)(1)(v) of this section, using linear interpolation as appropriate. Calculate  $f_{ntest}$  as the average of these two speed values. If there is only one speed corresponding to the value calculated in paragraph (a)(1)(v) of this section, take  $f_{ntest}$  as the speed where the maximum of the sum of the squares occurs.

\* \* \* \* \*

(b) *Maximum test torque,  $T_{test}$ .* For constant-speed engines, determine the measured  $T_{test}$  from the torque and power-versus-speed maps, generated according to § 1065.510, as follows:

(1) For constant speed engines mapped using the methods in

§ 1065.510(d)(5)(i) or (ii), determine  $T_{test}$  as follows:

(i) Determine maximum power,  $P_{max}$ , from the engine map generated according to § 1065.510 and calculate the value for power equal to 98% of  $P_{max}$ .

(ii) Determine the lowest and highest engine speeds corresponding to 98% of  $P_{max}$ , using linear interpolation, and no extrapolation, as appropriate.

(iii) Determine the engine speed corresponding to maximum power,  $f_{nP_{max}}$ , by calculating the average of the two speed values from paragraph (a)(1)(ii) of this section. If there is only one speed where power is equal to 98% of  $P_{max}$ , take  $f_{nP_{max}}$  as the speed at which  $P_{max}$  occurs.

(iv) Transform the map into a normalized power-versus-speed map by dividing power terms by  $P_{max}$  and dividing speed terms by  $f_{nP_{max}}$ . Use the Equation 1065.610–1 to calculate a quantity representing the sum of squares from the normalized map.

(v) Determine the maximum value for the sum of the squares from the map and multiply that value by 0.98.

(vi) Determine the lowest and highest engine speeds corresponding to the value calculated in paragraph (a)(1)(v) of this section, using linear interpolation as appropriate. Calculate  $f_{ntest}$  as the average of these two speed values. If there is only one speed corresponding to the value calculated in paragraph (a)(1)(v) of this section, take  $f_{ntest}$  as the speed where the maximum of the sum of the squares occurs.

(vii) The measured  $T_{test}$  is the mapped torque at  $f_{ntest}$ .

(2) For constant-speed engines using the two-point mapping method in § 1065.510(d)(5)(iii), you may follow paragraph (a)(1) of this section to determine the measured  $T_{test}$ , or you may use the measured torque of the second point as the measured  $T_{test}$  directly.

(3) Transform normalized torques to reference torques according to paragraph (d) of this section by using the measured maximum test torque determined according to paragraph (b)(1) of this section—or use your declared maximum test torque, as allowed in § 1065.510.

(c) \* \* \*

(1) *% speed.* If your normalized duty cycle specifies % speed values, use your warm idle speed and your maximum test speed to transform the duty cycle, as follows:

$$f_{\text{nref}} = \% \text{ speed} \cdot (f_{\text{ntest}} - f_{\text{idle}}) + f_{\text{idle}} \quad \text{Eq. 1065.610-3}$$

**Example:**

% speed = 85%  
 $f_{\text{ntest}} = 2364 \text{ r/min}$   
 $f_{\text{idle}} = 650 \text{ r/min}$   
 $f_{\text{nref}} = 85\% \cdot (2364 - 650) + 650$   
 $f_{\text{nref}} = 2107 \text{ r/min}$

(2) *A, B, and C speeds.* If your normalized duty cycle specifies speeds as A, B, or C values, use your power-versus-speed curve to determine the

lowest speed below maximum power at which 50% of maximum power occurs. Denote this value as  $n_{\text{lo}}$ . Take  $n_{\text{lo}}$  to be warm idle speed if all power points at speeds below the maximum power speed are higher than 50% of maximum power. Also determine the highest speed above maximum power at which 70% of maximum power occurs. Denote

this value as  $n_{\text{hi}}$ . If all power points at speeds above the maximum power speed are higher than 70% of maximum power, take  $n_{\text{hi}}$  to be the declared maximum safe engine speed or the declared maximum representative engine speed, whichever is lower. Use  $n_{\text{hi}}$  and  $n_{\text{lo}}$  to calculate reference values for A, B, or C speeds as follows:

$$f_{\text{nrefA}} = 0.25 \cdot (n_{\text{hi}} - n_{\text{lo}}) + n_{\text{lo}} \quad \text{Eq. 1065.610-4}$$

$$f_{\text{nrefB}} = 0.50 \cdot (n_{\text{hi}} - n_{\text{lo}}) + n_{\text{lo}} \quad \text{Eq. 1065.610-5}$$

$$f_{\text{nrefC}} = 0.75 \cdot (n_{\text{hi}} - n_{\text{lo}}) + n_{\text{lo}} \quad \text{Eq. 1065.610-6}$$

**Example:**

$n_{\text{lo}} = 1005 \text{ r/min}$   
 $n_{\text{hi}} = 2385 \text{ r/min}$   
 $f_{\text{nrefA}} = 0.25 \cdot (2385 - 1005) + 1005$   
 $f_{\text{nrefB}} = 0.50 \cdot (2385 - 1005) + 1005$   
 $f_{\text{nrefC}} = 0.75 \cdot (2385 - 1005) + 1005$   
 $f_{\text{nrefA}} = 1350 \text{ r/min}$   
 $f_{\text{nrefB}} = 1695 \text{ r/min}$

$f_{\text{nrefC}} = 2040 \text{ r/min}$

\* \* \* \*

■ 212. Section 1065.655 is amended by revising paragraph (d)(1) to read as follows:

**§ 1065.655 Chemical balances of fuel, intake air, and exhaust.**

\* \* \* \*

(d) \* \* \*

(1) You may calculate  $w_{\text{C}}$  as described in this paragraph (d)(1) based on measured fuel properties. To do so, you must determine values for  $\alpha$  and  $\beta$  in all cases, but you may set  $\gamma$  and  $\delta$  to zero if the default value listed in Table 1 of this section is zero. Calculate  $w_{\text{C}}$  using the following equation:

$$w_{\text{C}} = \frac{1 \cdot M_{\text{C}}}{1 \cdot M_{\text{C}} + \alpha \cdot M_{\text{H}} + \beta \cdot M_{\text{O}} + \gamma \cdot M_{\text{S}} + \delta \cdot M_{\text{N}}}$$

Eq. 1065.655-19

**Where:**

$w_{\text{C}}$  = carbon mass fraction of fuel.  
 $M_{\text{C}}$  = molar mass of carbon.  
 $\alpha$  = atomic hydrogen-to-carbon ratio of the mixture of fuel(s) being combusted.  
 $M_{\text{H}}$  = molar mass of hydrogen.  
 $\beta$  = atomic oxygen-to-carbon ratio of the mixture of fuel(s) being combusted.  
 $M_{\text{O}}$  = molar mass of oxygen.

$\gamma$  = atomic sulfur-to-carbon ratio of the mixture of fuel(s) being combusted.  
 $M_{\text{S}}$  = molar mass of sulfur.  
 $\delta$  = atomic nitrogen-to-carbon ratio of the mixture of fuel(s) being combusted.  
 $M_{\text{N}}$  = molar mass of nitrogen.

**Example:**  
 $\alpha = 1.8$

$\beta = 0.05$   
 $\gamma = 0.0003$   
 $\delta = 0.0001$   
 $M_{\text{C}} = 12.0107$   
 $M_{\text{H}} = 1.00794$   
 $M_{\text{O}} = 15.9994$   
 $M_{\text{S}} = 32.065$   
 $M_{\text{N}} = 14.0067$

$$\alpha = 1.8$$

$$\beta = 0.05$$

$$\gamma = 0.0003$$

$$\delta = 0.0001$$

$$M_C = 12.0107$$

$$M_H = 1.00794$$

$$M_O = 15.9994$$

$$M_S = 32.065$$

$$M_N = 14.0067$$

$$w_C = \frac{1 \cdot 12.0107}{1 \cdot 12.0107 + 1.8 \cdot 1.00794 + 0.05 \cdot 15.9994 + 0.0003 \cdot 32.065 + 0.0001 \cdot 14.0067}$$

$$w_C = 0.8206$$

$$w_C = 0.8206$$

\* \* \* \* \*

■ 213. Section 1065.680 is added to read as follows:

**§ 1065.680 Adjusting emission levels to account for infrequently regenerating aftertreatment devices.**

This section describes how to calculate and apply emission adjustment factors for engines using aftertreatment technology with infrequent regeneration events that may occur during testing. These adjustment factors are typically calculated based on measurements conducted for the purposes of engine certification, and then used to adjust the results of testing related to demonstrating compliance

with emission standards. For this section, “regeneration” means an intended event during which emission levels change while the system restores aftertreatment performance. For example, exhaust gas temperatures may increase temporarily to remove sulfur from adsorbers or to oxidize accumulated particulate matter in a trap. Also, “infrequent” refers to regeneration events that are expected to occur on average less than once over a transient or ramped-modal duty cycle, or on average less than once per mode in a discrete-mode test.

(a) *Adjustment factors.* Apply adjustment factors based on whether there is active regeneration during a test

segment. The test segment may be a test interval or a full duty cycle, as described in paragraph (b) of this section. For engines subject to standards over more than one duty cycle, you must develop adjustment factors under this section for each separate duty cycle. You must be able to identify active regeneration in a way that is readily apparent during all testing. All adjustment factors for regeneration are additive.

(1) If active regeneration does not occur during a test segment, apply an upward adjustment factor, *UAF*, that will be added to the measured emission rate for that test segment. Use the following equation to calculate *UAF*:

$$UAF_{[\text{cycle}]} = EF_{A[\text{cycle}]} - EF_{L[\text{cycle}]} \quad \text{Eq. 1065.680-1}$$

Where:

$EF_{A[\text{cycle}]}$  = the average emission factor over the test segment as determined in paragraph (a)(4) of this section.

$EF_{L[\text{cycle}]}$  = measured emissions over a complete test segment in which active regeneration does not occur.

*Example:*

$$EF_{\text{ARMC}} = 0.15 \text{ g/kW}\cdot\text{hr}$$

$$EF_{\text{LRMC}} = 0.11 \text{ g/kW}\cdot\text{hr}$$

$$UAF_{\text{RMC}} = 0.15 - 0.11 = 0.04 \text{ g/kW}\cdot\text{hr}$$

(2) If active regeneration occurs or starts to occur during a test segment, apply a downward adjustment factor, *DAF*, that will be subtracted from the measured emission rate for that test segment. Use the following equation to calculate *DAF*:

$$DAF_{[cycle]} = EF_{H[cycle]} - EF_{A[cycle]} \quad \text{Eq. 1065.680-2}$$

Where:

$EF_{H[cycle]}$  = measured emissions over the test segment from a complete regeneration event, or the average emission rate over multiple complete test segments with regeneration if the complete regeneration event lasts longer than one test segment.

Example:

$EF_{ARMC} = 0.15 \text{ g/kW}\cdot\text{hr}$   
 $EF_{HRMC} = 0.50 \text{ g/kW}\cdot\text{hr}$   
 $DAF_{RMC} = 0.50 - 0.15 = 0.35 \text{ g/kW}\cdot\text{hr}$

(3) Note that emissions for a given pollutant may be lower during

regeneration, in which case  $EF_L$  would be greater than  $EF_H$ , and both  $UAF$  and  $DAF$  would be negative.

(4) Calculate the average emission factor,  $EF_A$ , as follows:

$$EF_{A[cycle]} = F_{[cycle]} \cdot EF_{H[cycle]} + (1.00 - F_{[cycle]}) \cdot EF_{L[cycle]} \quad \text{Eq. 1065.680-3}$$

Where:

$F_{[cycle]}$  = the frequency of the regeneration event during the test segment, expressed in terms of the fraction of equivalent test segments during which active regeneration occurs, as described in paragraph (a)(5) of this section.

Example:

$F_{RMC} = 0.10$   
 $EF_{ARMC} = 0.10 \cdot 0.50 + (1.00 - 0.10) \cdot 0.11$   
 $= 0.15 \text{ g/kW}\cdot\text{hr}$

(5) The frequency of regeneration,  $F$ , generally characterizes how often a

regeneration event occurs within a series of test segments. Determine  $F$  using the following equation, subject to the provisions of paragraph (a)(6) of this section:

$$F_{[cycle]} = \frac{i_{r[cycle]}}{i_{r[cycle]} + i_{t[cycle]}} \quad \text{Eq. 1065.680-4}$$

Where:

$i_{r[cycle]}$  = the number of successive test segments required to complete an active

regeneration, rounded up to the next whole number.

$i_{t[cycle]}$  = the number of test segments from the end of one complete regeneration event

to the start of the next active regeneration, without rounding.

Example:

$$i_{rRMC} = 2$$

$$i_{tRMC} = 17.86$$

$$F_{RMC} = \frac{2}{17.86 + 2} = 0.10$$

(6) Use good engineering judgment to determine  $i_r$  and  $i_t$ , as follows:

(i) For engines that are programmed to regenerate after a specific time interval, you may determine the duration of a regeneration event and the time between regeneration events based on the engine's design parameters. For other engines, determine these values based on measurements from in-use operation or from running repetitive duty cycles in a laboratory.

(ii) For engines subject to standards over multiple duty cycles, such as for transient and steady-state testing, apply this same calculation to determine a value of  $F$  for each duty cycle.

(iii) Consider an example for an engine that is designed to regenerate its PM filter 500 minutes after the end of the last regeneration event, with the regeneration event lasting 30 minutes. If the RMC takes 28 minutes,  $i_{rRMC} = 2$  (30

$\div 28 = 1.07$ , which rounds up to 2), and  $i_{tRMC} = 500 \div 28 = 17.86$ .

(b) Develop adjustment factors for different types of testing as follows:

(1) *Discrete-mode testing.* Develop separate adjustment factors for each test mode (test interval) of a discrete-mode test. When measuring  $EF_H$ , if a regeneration event has started but is not complete when you reach the end of the sampling time for a test interval, extend the sampling period for that test interval until the regeneration event is complete.

(2) *Ramped-modal and transient testing.* Develop a separate set of adjustment factors for an entire ramped-modal cycle or transient duty cycle. When measuring  $EF_H$ , if a regeneration event has started but is not complete when you reach the end of the duty-cycle, start the next repeat test as soon as possible, allowing for the time needed to complete emission

measurement and installation of new filters for PM measurement; in that case  $EF_H$  is the average emission level for the test segments that included regeneration.

(3) *Accounting for cold-start measurements.* For engines subject to cold-start testing requirements, incorporate cold-start operation into your analysis as follows:

(i) Determine the frequency of regeneration,  $F$ , in a way that incorporates the impact of cold-start operation in proportion to the cold-start weighting factor specified in the standard-setting part. You may use good engineering judgment to determine the effect of cold-start operation analytically.

(ii) Treat cold-start testing and hot-start testing together as a single test segment for adjusting measured emission results under this section.



Apply the adjustment factor to the composite emission result.

(iii) You may apply the adjustment factor only to the hot-start test result if your aftertreatment technology does not regenerate during cold operation as represented by the cold-start transient duty cycle. If we ask for it, you must

demonstrate this by engineering analysis or by test data.

(c) If an engine has multiple regeneration strategies, determine and apply adjustment factors under this section separately for each type of regeneration.

■ 214. Section 1065.1005 is amended by revising paragraph (f)(2) to read as follows:

**§ 1065.1005 Symbols, abbreviations, acronyms, and units of measure.**

\* \* \* \* \*

(f) \* \* \*

(2) This part uses the following molar masses or effective molar masses of chemical species:

Symbol	Quantity	10 <sup>g</sup> - 3 kg · mol <sup>-1</sup>
$M_{\text{air}}$ .....	molar mass of dry air <sup>1</sup> .....	28.96559
$M_{\text{Ar}}$ .....	molar mass of argon .....	39.948
$M_{\text{C}}$ .....	molar mass of carbon .....	12.0107
$M_{\text{CH}_3\text{OH}}$ .....	molar mass of methanol .....	32.04186
$M_{\text{C}_2\text{H}_5\text{OH}}$ .....	molar mass of ethanol .....	46.06844
$M_{\text{C}_2\text{H}_4\text{O}}$ .....	molar mass of acetaldehyde .....	44.05256
$M_{\text{CH}_4\text{N}_2\text{O}}$ .....	molar mass of urea .....	60.05526
$M_{\text{C}_3\text{H}_8}$ .....	molar mass of propane .....	44.09562
$M_{\text{C}_3\text{H}_7\text{OH}}$ .....	molar mass of propanol .....	60.09502
$M_{\text{CO}}$ .....	molar mass of carbon monoxide .....	28.0101
$M_{\text{CH}_4}$ .....	molar mass of methane .....	16.0425
$M_{\text{CO}_2}$ .....	molar mass of carbon dioxide .....	44.0095
$M_{\text{H}}$ .....	molar mass of atomic hydrogen .....	1.00794
$M_{\text{H}_2}$ .....	molar mass of molecular hydrogen .....	2.01588
$M_{\text{H}_2\text{O}}$ .....	molar mass of water .....	18.01528
$M_{\text{CH}_2\text{O}}$ .....	molar mass of formaldehyde .....	30.02598
$M_{\text{He}}$ .....	molar mass of helium .....	4.002602
$M_{\text{N}}$ .....	molar mass of atomic nitrogen .....	14.0067
$M_{\text{N}_2}$ .....	molar mass of molecular nitrogen .....	28.0134
$M_{\text{NH}_3}$ .....	molar mass of ammonia .....	17.03052
$M_{\text{NMHC}}$ .....	effective $C_1$ molar mass of nonmethane hydrocarbon <sup>2</sup> .....	13.875389
$M_{\text{NMHCE}}$ .....	effective $C_1$ molar mass of nonmethane hydrocarbon equivalent <sup>2</sup> .....	13.875389
$M_{\text{NO}_x}$ .....	effective molar mass of oxides of nitrogen <sup>3</sup> .....	46.0055
$M_{\text{N}_2\text{O}}$ .....	molar mass of nitrous oxide .....	44.0128
$M_{\text{O}}$ .....	molar mass of atomic oxygen .....	15.9994
$M_{\text{O}_2}$ .....	molar mass of molecular oxygen .....	31.9988
$M_{\text{S}}$ .....	molar mass of sulfur .....	32.065
$M_{\text{THC}}$ .....	effective $C_1$ molar mass of total hydrocarbon <sup>2</sup> .....	13.875389
$M_{\text{THCE}}$ .....	effective $C_1$ molar mass of total hydrocarbon equivalent <sup>2</sup> .....	13.875389

<sup>1</sup> See paragraph (f)(1) of this section for the composition of dry air.

<sup>2</sup> The effective molar masses of THC, THCE, NMHC, and NMHCE are defined on a  $C_1$  basis and are based on an atomic hydrogen-to-carbon ratio,  $\alpha$ , of 1.85 (with  $\beta$ ,  $\gamma$ , and  $\delta$  equal to zero).

<sup>3</sup> The effective molar mass of  $\text{NO}_x$  is defined by the molar mass of nitrogen dioxide,  $\text{NO}_2$ .

\* \* \* \* \*

**PART 1066—VEHICLE-TESTING PROCEDURES**

■ 215. The authority citation for part 1066 continues to read as follows:

Authority: 42 U.S.C. 7401–7671q.

**Subpart C—Dynamometer Specifications**

■ 216. Section 1066.210 is amended by revising paragraph (d)(3) to read as follows:

**§ 1066.210 Dynamometers.**

\* \* \* \* \*

(d) \* \* \*

(3) The load applied by the dynamometer simulates forces acting on the vehicle during normal driving according to the following equation:

$$FR_i = A \cdot \frac{100}{\sqrt{100^2 + G_i^2}} + B \cdot v_i + C \cdot v_i^2 + M_e \cdot \frac{v_i - v_{i-1}}{t_i - t_{i-1}} + M \cdot a_g \cdot \frac{G_i}{\sqrt{100^2 + G_i^2}} \quad \text{Eq. 1066.210-1}$$

Where:

$FR$  = total road-load force to be applied at the surface of the roll. The total force is the sum of the individual tractive forces applied at each roll surface.

$i$  = a counter to indicate a point in time over the driving schedule. For a dynamometer operating at 10-Hz intervals over a 600-second driving schedule, the maximum value of  $i$  should be 6,000.

$A$  = a vehicle-specific constant value representing the vehicle's frictional load in lbf or newtons. See subpart D of this part.

$G_i$  = instantaneous road grade, in percent (increase in elevation per 100 units horizontal length).

$B$  = a vehicle-specific coefficient representing load from drag and rolling resistance, which are a function of vehicle speed, in

lbf/mph or N·s/m. See subpart D of this part.

$v$  = instantaneous linear speed at the roll surfaces as measured by the dynamometer, in mph or m/s. Let  $v_{i-1}$  = 0 for  $i = 0$ .

$C$  = a vehicle-specific coefficient representing aerodynamic effects, which are a function of vehicle speed squared, in lbf/mph<sup>2</sup> or N·s<sup>2</sup>/m<sup>2</sup>. See subpart D of this part.

$M_c$  = the vehicle's effective mass in lbm or kg, including the effect of rotating axles as specified in § 1066.310(b)(7).  
 $t$  = elapsed time in the driving schedule as measured by the dynamometer, in seconds. Let  $t_{i-1} = 0$  for  $i = 0$ .  
 $M$  = the measured vehicle mass, in lbm or kg.  
 $a_g$  = acceleration of Earth's gravity, as described in 40 CFR 1065.630.

\* \* \*

#### Subpart D—Coastdown

■ 217. Section 1066.301 is amended by adding introductory text to read as follows:

##### § 1066.301 Overview of road-load determination procedures.

Vehicle testing on a chassis dynamometer involves simulating the

road-load force, which is the sum of forces acting on a vehicle from aerodynamic drag, tire rolling resistance, driveline losses, and other effects of friction. Determine dynamometer settings to simulate road-load force in two stages. First, perform a road-load force specification by characterizing on-road operation. Second, perform a road-load derivation to determine the appropriate dynamometer load settings to simulate the road-load force specification from the on-road test.

\* \* \*

■ 218. Section 1066.310 is amended by revising paragraphs (b)(7)(ii)(B) and (D) to read as follows:

##### § 1066.310 Coastdown procedures for vehicles above 14,000 pounds GVWR.

\* \* \*

(b) \* \* \*

(7) \* \* \*

(ii) \* \* \*

(B) Calculate the vehicle's effective mass,  $M_c$ , in kg by adding 56.7 kg to the measured vehicle mass,  $M$ , for each tire making road contact. This accounts for the rotational inertia of the wheels and tires.

\* \* \*

(D) Plot the data from all the coastdown runs on a single plot of  $F_i$  vs.  $v_i^2$  to determine the slope correlation,  $D$ , based on the following equation:

$$F_i - M \cdot a_g \cdot \frac{\Delta h}{\Delta s} = A_m + D \cdot v_i^2 \quad \text{Eq. 1066.310-2}$$

Where:

$M$  = the measured vehicle mass, expressed to at least the nearest 0.1 kg.

$a_g$  = acceleration of Earth's gravity, as described in 40 CFR 1065.630.

$\Delta h$  = change in elevation over the measurement interval, in m. Assume  $\Delta h = 0$  if you are not correcting for grade.

$\Delta s$  = distance the vehicle travels down the road during the measurement interval, in m.

$A_m$  = the calculated value of the y-intercept based on the curve-fit.

\* \* \*

#### Subpart E—Preparing Vehicles and Running an Exhaust Emission Test

■ 219. Section 1066.410 is amended by revising paragraph (h) introductory text to read as follows:

##### § 1066.410 Dynamometer test procedure.

\* \* \*

(h) Determine equivalent test weight as follows:

\* \* \*

#### Subpart G—Calculations

■ 220. Section 1066.605 is amended by redesignating paragraphs (d) through (g) as paragraphs (e) through (h), respectively and adding a new paragraph (d) to read as follows:

##### § 1066.605 Mass-based and molar-based exhaust emission calculations.

\* \* \*

(d) Calculate g/mile emission rates using the following equation unless specified otherwise in the standard-setting part:

$$e_{[\text{emission}]} = \frac{m_{[\text{emission}]}}{D}$$

Where:

$e_{[\text{emission}]}$  = emission rate over the test interval.

$m_{[\text{emission}]}$  = emission mass over the test interval.

$D$  = the measured driving distance over the test interval.

Example:

$$m_{\text{NOx}} = 0.3177 \text{ g}$$

$$D_{\text{HFET}} = 10.19$$

$$e_{\text{NOx}} = \frac{0.3177}{10.19} = 0.0312 \text{ g/mi}$$

\* \* \*

#### Subpart H—Cold Temperature Test Procedures

■ 221. Section 1066.710 is amended by revising paragraphs (a)(5) and (d)(3) introductory text to read as follows:

##### § 1066.710 Cold temperature testing procedures for measuring CO and NMHC emissions and determining fuel economy.

\* \* \*

(a) \* \* \*

(5) Adjust the dynamometer to simulate vehicle operation on the road at  $-7^{\circ}\text{C}$  as described in § 1066.305(b)(2).

\* \* \* \*

(d) \* \* \*

(3) You may start the preconditioning drive once the fuel in the fuel tank reaches  $(-12.6 \text{ to } -1.4)^{\circ}\text{C}$ . Precondition the vehicle as follows:

\* \* \* \*

### Subpart I—Exhaust Emission Test Procedures for Motor Vehicles

■ 222. Section 1066.815 is amended by revising paragraph (b) introductory text to read as follows:

#### § 1066.815 Exhaust emission test procedures for FTP testing.

\* \* \* \*

(b) *PM sampling options.* Collect PM using any of the procedures specified in paragraphs (b)(1) through (5) of this section and use the corresponding equation in § 1066.820 to calculate FTP composite emissions. Testing must meet the requirements related to filter face velocity as described in 40 CFR 1065.170(c)(1)(vi), except as specified in paragraphs (b)(4) and (5) of this section. For procedures involving flow weighting, set the filter face velocity to a weighting target of 1.0 to meet the requirements of 40 CFR 1065.170(c)(1)(vi). Allow filter face velocity to decrease as a percentage of the weighting factor if the weighting factor is less than 1.0. Use the appropriate equations in § 1066.610 to show that you meet the dilution factor requirements of § 1066.110(b)(2)(iii)(B). If you collect PM using the procedures specified in paragraph (b)(4) or (b)(5) of this section, the residence time requirements in 40 CFR 1065.140(e)(3) apply, except that you may exceed an overall residence time of 5.5 s for sample flow rates below the highest expected sample flow rate.

\* \* \* \*

### PART 1068—GENERAL COMPLIANCE PROVISIONS FOR HIGHWAY, STATIONARY, AND NONROAD PROGRAMS

■ 223. The authority citation for part 1068 continues to read as follows:

Authority: 42 U.S.C. 7401–7671q.

#### Subpart A—Applicability and Miscellaneous Provisions

■ 224. Section 1068.1 is revised to read as follows:

#### § 1068.1 Does this part apply to me?

(a) The provisions of this part apply to everyone with respect to the engine and equipment categories as described in this paragraph (a). They apply to everyone, including owners, operators, parts manufacturers, and persons performing maintenance. Where we identify an engine category, the provisions of this part also apply with respect to the equipment using such engines. This part 1068 applies to different engine and equipment categories as follows:

(1) This part 1068 applies to motor vehicles we regulate under 40 CFR part 86, subpart S, to the extent and in the manner specified in 40 CFR parts 85 and 86.

(2) This part 1068 applies for heavy-duty motor vehicles certified under 40 CFR part 1037, subject to the provisions of 40 CFR parts 85 and 1037. This part 1068 applies to other heavy-duty motor vehicles and motor vehicle engines to the extent and in the manner specified in 40 CFR parts 85, 86, and 1036.

(3) This part 1068 applies to highway motorcycles we regulate under 40 CFR part 86, subparts E and F, to the extent and in the manner specified in 40 CFR parts 85 and 86.

(4) This part 1068 applies to aircraft we regulate under 40 CFR part 87 to the extent and in the manner specified in 40 CFR part 87.

(5) This part 1068 applies for locomotives that are subject to the provisions of 40 CFR part 1033. This part 1068 does not apply for locomotives or locomotive engines that were originally manufactured before July 7, 2008, and that have not been remanufactured on or after July 7, 2008.

(6) This part 1068 applies for land-based nonroad compression-ignition engines that are subject to the provisions of 40 CFR part 1039. This part 1068 does not apply for engines certified under 40 CFR part 89.

(7) This part 1068 applies for stationary compression-ignition engines certified using the provisions of 40 CFR parts 89, 94, 1039, and 1042 as described in 40 CFR part 60, subpart III.

(8) This part 1068 applies for marine compression-ignition engines that are subject to the provisions of 40 CFR part 1042. This part 1068 does not apply for marine compression-ignition engines certified under 40 CFR part 94.

(9) This part 1068 applies for marine spark-ignition engines that are subject to the provisions of 40 CFR part 1045. This part 1068 does not apply for marine spark-ignition engines certified under 40 CFR part 91.

(10) This part 1068 applies for large nonroad spark-ignition engines that are

subject to the provisions of 40 CFR part 1048.

(11) This part 1068 applies for stationary spark-ignition engines certified using the provisions of 40 CFR part 1048 or part 1054, as described in 40 CFR part 60, subpart JJJJ.

(12) This part 1068 applies for recreational engines and vehicles, including snowmobiles, off-highway motorcycles, and all-terrain vehicles that are subject to the provisions of 40 CFR part 1051.

(13) This part applies for small nonroad spark-ignition engines that are subject to the provisions of 40 CFR part 1054. This part 1068 does not apply for nonroad spark-ignition engines certified under 40 CFR part 90.

(14) This part applies for fuel-system components installed in nonroad equipment powered by volatile liquid fuels that are subject to the provisions of 40 CFR part 1060.

(b) [Reserved]

(c) Paragraph (a) of this section identifies the parts of the CFR that define emission standards and other requirements for particular types of engines and equipment. This part 1068 refers to each of these other parts generically as the “standard-setting part.” For example, 40 CFR part 1051 is always the standard-setting part for snowmobiles. Follow the provisions of the standard-setting part if they are different than any of the provisions in this part.

(d) Specific provisions in this part 1068 start to apply separate from the schedule for certifying engines/equipment to new emission standards, as follows:

(1) The provisions of §§ 1068.30 and 1068.310 apply for stationary spark-ignition engines built on or after January 1, 2004, and for stationary compression-ignition engines built on or after January 1, 2006.

(2) The provisions of §§ 1068.30 and 1068.235 apply for the types of engines/equipment listed in paragraph (a) of this section beginning January 1, 2004, if they are used solely for competition.

(3) The standard-setting part may specify how the provisions of this part 1068 apply for uncertified engines/equipment.

■ 225. Section 1068.10 is amended by revising the section heading to read as follows:

#### § 1068.10 Confidential information.

\* \* \* \*

■ 226. Section 1068.15 is amended by revising the section heading and paragraph (a) to read as follows:

**§ 1068.15 General provisions for EPA decision-making.**

(a) Not all EPA employees may represent the Agency with respect to EPA decisions under this part or the standard-setting part. Only the Administrator of the Environmental Protection Agency or an official to whom the Administrator has delegated specific authority may represent the Agency. For more information, ask for a copy of the relevant sections of the EPA Delegations Manual from the Designated Compliance Officer.

\* \* \* \* \*

**§ 1068.20—[Amended]**

■ 227. Section 1068.20 is amended by removing paragraphs (b) and (c) and redesignating paragraphs (d) through (f) as paragraphs (b) through (d), respectively.

■ 228. Section 1068.27 is revised to read as follows:

**§ 1068.27 May EPA conduct testing with my engines/equipment?**

(a) As described in the standard-setting part, we may perform testing on your engines/equipment before we issue a certificate of conformity. This is generally known as confirmatory testing.

(b) If we request it, you must make a reasonable number of production-line engines or pieces of production-line equipment available for a reasonable time so we can test or inspect them for compliance with the requirements of this chapter.

(c) If your emission-data engine/equipment or production engine/equipment requires special components for proper testing, you must promptly provide any such components to us if we ask for them.

■ 229. Section 1068.30 is revised to read as follows:

**§ 1068.30 Definitions.**

The following definitions apply to this part. The definitions apply to all subparts unless we note otherwise. All undefined terms have the meaning the Clean Air Act gives to them. The definitions follow:

*Affiliated companies or affiliates* means one of the following:

(1) For determinations related to small manufacturer allowances or other small business provisions, these terms mean all entities considered to be affiliates with your entity under the Small Business Administration's regulations in 13 CFR 121.103.

(2) For all other provisions, these terms mean all of the following:

(i) Parent companies (as defined in this section).

(ii) Subsidiaries (as defined in this section).

(iii) Subsidiaries of your parent company.

*Aftertreatment* means relating to a catalytic converter, particulate filter, or any other system, component, or technology mounted downstream of the exhaust valve (or exhaust port) whose design function is to reduce emissions in the engine exhaust before it is exhausted to the environment. Exhaust-gas recirculation (EGR) is not aftertreatment.

*Aircraft* means any vehicle capable of sustained air travel more than 100 feet above the ground.

*Certificate holder* means a manufacturer (including importers) with a valid certificate of conformity for at least one family in a given model year, or the preceding model year. Note that only manufacturers may hold certificates. Your applying for or accepting a certificate is deemed to be your agreement that you are a manufacturer.

*Clean Air Act* means the Clean Air Act, as amended, 42 U.S.C. 7401–7671q.

*Date of manufacture* means one of the following:

(1) For engines, the date on which the crankshaft is installed in an engine block, with the following exceptions:

(i) For engines produced by secondary engine manufacturers under § 1068.262, date of manufacture means the date the engine is received from the original engine manufacturer. You may assign an earlier date up to 30 days before you received the engine, but not before the crankshaft was installed. You may not assign an earlier date if you cannot demonstrate the date the crankshaft was installed.

(ii) Manufacturers may assign a date of manufacture at a point in the assembly process later than the date otherwise specified under this definition. For example, a manufacturer may use the build date printed on the label or stamped on the engine as the date of manufacture.

(2) For equipment, the date on which the engine is installed, unless otherwise specified in the standard-setting part. Manufacturers may alternatively assign a date of manufacture later in the assembly process.

*Days* means calendar days, including weekends and holidays.

*Defeat device* has the meaning given in the standard-setting part.

*Designated Compliance Officer* means one of the following:

(1) For motor vehicles regulated under 40 CFR part 86, subpart S: Director, Light-Duty Vehicle Center, U.S. Environmental Protection Agency, 2000

Traverwood Drive, Ann Arbor, MI 48105; [complianceinfo@epa.gov](mailto:complianceinfo@epa.gov); [epa.gov/otaq/verify](http://epa.gov/otaq/verify).

(2) For compression-ignition engines used in heavy-duty highway vehicles regulated under 40 CFR part 86, subpart A, and 40 CFR parts 1036 and 1037, and for nonroad and stationary compression-ignition engines or equipment regulated under 40 CFR parts 60, 1033, 1039, and 1042: Director, Diesel Engine Compliance Center, U.S. Environmental Protection Agency, 2000 Traverwood Drive, Ann Arbor, MI 48105; [complianceinfo@epa.gov](mailto:complianceinfo@epa.gov); [epa.gov/otaq/verify](http://epa.gov/otaq/verify).

(3) Director, Gasoline Engine Compliance Center, U.S. Environmental Protection Agency, 2000 Traverwood Drive, Ann Arbor, MI 48105; [nonroad-si-cert@epa.gov](mailto:nonroad-si-cert@epa.gov); [epa.gov/otaq/verify](http://epa.gov/otaq/verify), for all the following engines and vehicles:

(i) For spark-ignition engines used in heavy-duty highway vehicles regulated under 40 CFR part 86, subpart A, and 40 CFR parts 1036 and 1037,

(ii) For highway motorcycles regulated under 40 CFR part 86, subpart E.

(iii) For nonroad and stationary spark-ignition engines or equipment regulated under 40 CFR parts 60, 1045, 1048, 1051, 1054, and 1060.

*Engine* means an engine block with an installed crankshaft, or a gas turbine engine. The term engine does not include engine blocks without an installed crankshaft, nor does it include any assembly of reciprocating engine components that does not include the engine block. (**Note:** For purposes of this definition, any component that is the primary means of converting an engine's energy into usable work is considered a crankshaft, whether or not it is known commercially as a crankshaft.) This includes complete and partially complete engines as follows:

(1) A complete engine is a fully assembled engine in its final configuration. In the case of equipment-based standards, an engine is not considered complete until it is installed in the equipment, even if the engine itself is fully assembled.

(2) A partially complete engine is an engine that is not fully assembled or is not in its final configuration. Except where we specify otherwise in this part or the standard-setting part, partially complete engines are subject to the same standards and requirements as complete engines. The following would be considered examples of partially complete engines:

(i) An engine that is missing certain emission-related components.

(ii) A new engine that was originally assembled as a motor-vehicle engine

that will be recalibrated for use as a nonroad engine.

(iii) A new engine that was originally assembled as a land-based engine that will be modified for use as a marine propulsion engine.

(iv) A short block consisting of a crankshaft and other engine components connected to the engine block, but missing the head assembly.

(v) A long block consisting of all engine components except the fuel system and an intake manifold.

(vi) In the case of equipment-based standards, a fully functioning engine that is not yet installed in the equipment. For example, a fully functioning engine that will be installed in an off-highway motorcycle or a locomotive is considered partially complete until it is installed in the equipment.

*Engine-based standard* means an emission standard expressed in units of grams of pollutant per kilowatt-hour (or grams of pollutant per horsepower-hour) that applies to the engine. Emission standards are either engine-based or equipment-based. Note that engines may be subject to additional standards such as smoke standards.

*Engine-based test* means an emission test intended to measure emissions in units of grams of pollutant per kilowatt-hour (or grams of pollutant per horsepower-hour), without regard to whether the standard applies to the engine or equipment. Note that some products that are subject to engine-based testing are subject to additional test requirements such as for smoke.

*Engine configuration* means a unique combination of engine hardware and calibration within an engine family. Engines within a single engine configuration differ only with respect to normal production variability or factors unrelated to emissions.

*Engine/equipment and engines/equipment* mean engine(s) and/or equipment depending on the context. Specifically these terms mean the following:

(1) Engine(s) when only engine-based standards apply.

(2) Engine(s) for testing issues when engine-based testing applies.

(3) Engine(s) and equipment when both engine-based and equipment-based standards apply.

(4) Equipment when only equipment-based standards apply.

(5) Equipment for testing issues when equipment-based testing applies.

*Equipment* means one of the following things:

(1) Any vehicle, vessel, or other type of equipment that is subject to the requirements of this part or that uses an

engine that is subject to the requirements of this part. An installed engine is part of the equipment.

(2) Fuel-system components that are subject to an equipment-based standard under this chapter. Installed fuel-system components are also considered part of the engine/equipment to which they are attached.

*Equipment-based standard* means an emission standard that applies to the equipment in which an engine is used or to fuel-system components associated with an engine, without regard to how the emissions are measured. If equipment-based standards apply, we require that the equipment or fuel-system components be certified rather than just the engine. Emission standards are either engine-based or equipment-based. For example, recreational vehicles we regulate under 40 CFR part 1051 are subject to equipment-based standards even if emission measurements are based on engine operation alone.

*Excluded engines/equipment* means engines/equipment that are not subject to emission standards or other requirements because they do not meet the definitions or other regulatory provisions that define applicability. For example, a non-stationary engine that is used solely for off-highway competition is excluded from the requirements of this part because it meets neither the definition of "motor vehicle engine" nor "nonroad engine" under section 216 of the Clean Air Act.

*Exempted* means relating to engines/equipment that are not required to meet otherwise applicable standards. Exempted engines/equipment must conform to regulatory conditions specified for an exemption in this part 1068 or in the standard-setting part. Exempted engines/equipment are deemed to be "subject to" the standards of the standard-setting part even though they are not required to comply with the otherwise applicable requirements. Engines/equipment exempted with respect to a certain tier of standards may be required to comply with an earlier tier of standards as a condition of the exemption; for example, engines exempted with respect to Tier 3 standards may be required to comply with Tier 1 or Tier 2 standards.

*Family* means engine family or emission family, as applicable under the standard-setting part.

*Final deteriorated test result* has the meaning given in the standard-setting part. If it is not defined in the standard-setting part, it means the emission level that results from applying all appropriate adjustments (such as deterioration factors) to the measured

emission result of the emission-data engine.

*Gas turbine engine* means anything commercially known as a gas turbine engine or any collection of assembled engine components that is substantially similar to engines commercially known as gas turbine engines. For example, a jet engine is a gas turbine engine. Gas turbine engines may be complete or partially complete. Turbines that rely on external combustion such as steam engines are not gas turbine engines.

*Good engineering judgment* means judgments made consistent with generally accepted scientific and engineering principles and all available relevant information. See § 1068.5.

*Manufacturer* has the meaning given in section 216(1) of the Clean Air Act (42 U.S.C. 7550(1)). In general, this term includes any person who manufactures or assembles an engine or piece of equipment for sale in the United States or otherwise introduces a new engine or piece of equipment into U.S. commerce. This includes importers that import new engines or new equipment into the United States for resale. It also includes secondary engine manufacturers.

*Model year* has the meaning given in the standard-setting part. Unless the standard-setting part specifies otherwise, model year for individual engines/equipment is based on the date of manufacture or a later stage in the assembly process determined by the manufacturer, subject to the limitations described in §§ 1068.103 and 1068.360. The model year of a new engine that is neither certified nor exempt is deemed to be the calendar year in which it is sold, offered for sale, imported, or delivered or otherwise introduced into U.S. commerce.

*Motor vehicle* has the meaning given in 40 CFR 85.1703(a).

*New* has the meaning we give it in the standard-setting part. Note that in certain cases, used and remanufactured engines/equipment may be "new" engines/equipment.

*Nonroad engine* means:

(1) Except as discussed in paragraph (2) of this definition, a nonroad engine is an internal combustion engine that meets any of the following criteria:

(i) It is (or will be) used in or on a piece of equipment that is self-propelled or serves a dual purpose by both propelling itself and performing another function (such as garden tractors, off-highway mobile cranes and bulldozers).

(ii) It is (or will be) used in or on a piece of equipment that is intended to be propelled while performing its function (such as lawnmowers and string trimmers).

(iii) By itself or in or on a piece of equipment, it is portable or transportable, meaning designed to be and capable of being carried or moved from one location to another. Indicia of transportability include, but are not limited to, wheels, skids, carrying handles, dolly, trailer, or platform.

(2) An internal combustion engine is not a nonroad engine if it meets any of the following criteria:

(i) The engine is used to propel a motor vehicle, an aircraft, or equipment used solely for competition.

(ii) The engine is regulated under 40 CFR part 60, (or otherwise regulated by a federal New Source Performance Standard promulgated under section 111 of the Clean Air Act (42 U.S.C. 7411)). Note that this criterion does not apply for engines meeting any of the criteria of paragraph (1) of this definition that are voluntarily certified under 40 CFR part 60.

(iii) The engine otherwise included in paragraph (1)(iii) of this definition remains or will remain at a location for more than 12 consecutive months or a shorter period of time for an engine located at a seasonal source. A location is any single site at a building, structure, facility, or installation. For any engine (or engines) that replaces an engine at a location and that is intended to perform the same or similar function as the engine replaced, include the time period of both engines in calculating the consecutive time period. An engine located at a seasonal source is an engine that remains at a seasonal source during the full annual operating period of the seasonal source. A seasonal source is a stationary source that remains in a single location on a permanent basis (*i.e.*, at least two years) and that operates at that single location approximately three months (or more) each year. See § 1068.31 for provisions that apply if the engine is removed from the location.

*Operating hours* means:

(1) For engine and equipment storage areas or facilities, times during which people other than custodians and security personnel are at work near, and can access, a storage area or facility.

(2) For other areas or facilities, times during which an assembly line operates or any of the following activities occurs:

(i) Testing, maintenance, or service accumulation.

(ii) Production or compilation of records.

(iii) Certification testing.

(iv) Translation of designs from the test stage to the production stage.

(v) Engine or equipment manufacture or assembly.

*Parent company* means any entity that has a controlling ownership of another

company. Note that the standard-setting part may treat a partial owner as a parent company even if it does not have controlling ownership of a company.

*Piece of equipment* means any vehicle, vessel, locomotive, aircraft, or other type of equipment equipped with engines to which this part applies.

*Placed into service* means used for its intended purpose. Engines/equipment do not qualify as being “placed into service” based on incidental use by a manufacturer or dealer.

*Reasonable technical basis* means information that would lead a person familiar with engine design and function to reasonably believe a conclusion related to compliance with the requirements of this part. For example, it would be reasonable to believe that parts performing the same function as the original parts (and to the same degree) would control emissions to the same degree as the original parts. Note that what is a reasonable basis for a person without technical training might not qualify as a reasonable technical basis.

*Relating to* as used in this section means relating to something in a specific, direct manner. This expression is used in this section only to define terms as adjectives and not to broaden the meaning of the terms. Note that “relating to” is used in the same manner as in the standard-setting parts.

*Replacement engine* means an engine exempted as a replacement engine under § 1068.240.

*Revoke* means to terminate the certificate or an exemption for a family. If we revoke a certificate or exemption, you must apply for a new certificate or exemption before continuing to introduce the affected engines/equipment into U.S. commerce. This does not apply to engines/equipment you no longer possess.

*Secondary engine manufacturer* means anyone who produces a new engine by modifying a complete or partially complete engine that was made by a different company. For the purpose of this definition, “modifying” does not include making changes that do not remove an engine from its original certified configuration. Secondary engine manufacturing includes, for example, converting automotive engines for use in industrial applications, or land-based engines for use in marine applications. This applies whether it involves a complete or partially complete engine and whether the engine was previously certified to emission standards or not.

(1) Manufacturers controlled by the manufacturer of the base engine (or by an entity that also controls the

manufacturer of the base engine) are not secondary engine manufacturers; rather, both entities are considered to be one manufacturer for purposes of this part.

(2) This definition applies equally to equipment manufacturers that modify engines. Also, equipment manufacturers that certify to equipment-based standards using engines produced by another company are deemed to be secondary engine manufacturers.

(3) Except as specified in paragraph (2) of this definition, companies importing complete engines into the United States are not secondary engine manufacturers regardless of the procedures and relationships between companies for assembling the engines.

*Small business* means either of the following:

(1) A company that qualifies under the standard-setting part for special provisions for small businesses or small-volume manufacturers.

(2) A company that qualifies as a small business under the regulations adopted by the Small Business Administration at 13 CFR 121.201 if the standard-setting part does not establish such qualifying criteria.

*Standard-setting part* means a part in the Code of Federal Regulations that defines emission standards for a particular engine and/or piece of equipment (see § 1068.1(a)). For example, the standard-setting part for marine spark-ignition engines is 40 CFR part 1045. For provisions related to evaporative emissions, the standard-setting part may be 40 CFR part 1060, as specified in 40 CFR 1060.1.

*Subsidiary* means an entity that is owned or controlled by a parent company.

*Suspend* means to temporarily discontinue the certificate or an exemption for a family. If we suspend a certificate, you may not sell, offer for sale, or introduce or deliver into commerce in the United States or import into the United States engines/equipment from that family unless we reinstate the certificate or approve a new one. This also applies if we suspend an exemption, unless we reinstate the exemption.

*Ultimate purchaser* means the first person who in good faith purchases a new engine or new piece of equipment for purposes other than resale.

*United States*, in a geographic sense, means the States, the District of Columbia, the Commonwealth of Puerto Rico, the Commonwealth of the Northern Mariana Islands, Guam, American Samoa, and the U.S. Virgin Islands.

*U.S.-directed production volume* has the meaning given in the standard-setting part.

*Void* means to invalidate a certificate or an exemption *ab initio* (“from the beginning”). If we void a certificate, all the engines/equipment introduced into U.S. commerce under that family for that model year are considered uncertified (or nonconforming) and are therefore not covered by a certificate of conformity, and you are liable for all engines/equipment introduced into U.S. commerce under the certificate and may face civil or criminal penalties or both. This applies equally to all engines/equipment in the family, including engines/equipment introduced into U.S. commerce before we voided the certificate. If we void an exemption, all the engines/equipment introduced into U.S. commerce under that exemption are considered uncertified (or nonconforming), and you are liable for engines/equipment introduced into U.S. commerce under the exemption and may face civil or criminal penalties or both. You may not sell, offer for sale, or introduce or deliver into commerce in the United States or import into the United States any additional engines/equipment using the voided exemption.

*Voluntary emission recall* means a repair, adjustment, or modification program voluntarily initiated and conducted by a manufacturer to remedy any emission-related defect for which engine owners have been notified.

*We (us, our)* means the Administrator of the Environmental Protection Agency and any authorized representatives.

■ 230. Section 1068.31 is amended by revising the section heading, the introductory text, and paragraph (c) to read as follows:

**§ 1068.31 Changing the status of nonroad or stationary engines under the definition of “nonroad engine”.**

This section specifies the provisions that apply when an engine previously used in a nonroad application is subsequently used in an application other than a nonroad application, or when an engine previously used in a stationary application (*i.e.*, an engine that was not used as a nonroad engine and that was not used to propel a motor vehicle, an aircraft, or equipment used solely for competition) is moved.

(c) A stationary engine does not become a new nonroad engine if it is moved but continues to meet the criteria specified in paragraph (2)(iii) in the definition of “nonroad engine” in § 1068.30 in its new location. For example, a transportable engine that is used in a single specific location for 18

months and is later moved to a second specific location where it will remain for at least 12 months is considered to be a stationary engine in both locations. Note that for stationary engines that are neither portable nor transportable in actual use, the residence-time restrictions in the definition of “nonroad engine” generally do not apply.

\* \* \* \* \*

■ 231. A new § 1068.32 is added to read as follows:

**§ 1068.32 Explanatory terms.**

This section explains how certain phrases and terms are used in 40 CFR parts 1000 through 1099, especially those used to clarify and explain regulatory provisions.

(a) *Types of provisions.* The term “provision” includes all aspects of the regulations. As described in this section, regulatory provisions include standards, requirements, prohibitions, and allowances, along with a variety of other types of provisions. In certain cases, we may use these terms to apply to some but not all of the provisions of a part or section. For example, we may apply the allowances of a section for certain engines, but not the requirements. We may also apply all provisions except the requirements and prohibitions.

(1) A standard is a requirement established by regulation that limits the emissions of air pollutants. Examples of standards include numerical emission standards (such as 0.01 g/kW-hr) and design standards (such a closed crankcase standard). Compliance with or conformance to a standard is a specific type of requirement, and in some cases a standard may be discussed as a requirement. Thus, a statement about the requirements of a part or section also applies with respect to the standards of the part or section.

(2) The regulations apply other requirements in addition to standards. For example, manufacturers are required to keep records and provide reports to EPA.

(3) While requirements state what someone must do, prohibitions state what someone may not do. Prohibitions are often referred to as prohibited acts or prohibited actions. Most penalties apply for violations of prohibitions. A list of prohibitions may therefore include the failure to meet a requirement as a prohibited action.

(4) Allowances provide some form of relief from requirements. This may include provisions delaying implementation, establishing exemptions or test waivers, or creating alternative compliance options. Allowances may be conditional. For

example, we may exempt you from certain requirements on the condition that you meet certain other requirements.

(5) The regulations also include important provisions that are not standards, requirements, prohibitions, or allowances, such as definitions.

(6) Engines/equipment are generally considered “*subject to*” a specific provision if that provision applies, or if it does not apply because of an exemption authorized under the regulation. For example, locomotives are subject to the provisions of 40 CFR part 1033 even if they are exempted from the standards of part 1033.

(b) *Singular and plural.* Unless stated otherwise or unless it is clear from the regulatory context, provisions written in singular form include the plural form and provisions written in plural form include the singular form. For example, the statement “The manufacturer must keep this report for three years” is equivalent to “The manufacturers must keep these reports for three years.”

(c) *Inclusive lists.* Lists in the regulations prefaced by “including” or “this includes” are not exhaustive. The terms “including” and “this includes” should be read to mean “including but not limited to” and “this includes but is not limited to”. For example, the phrase “including small manufacturers” does not exclude large manufacturers. However, prescriptive statements to “include” specific items (such as those related to recordkeeping and reporting requirements) may be exhaustive.

(d) *Notes.* Statements that begin with “**Note:**” or “**Note that**” are intended to clarify specific regulatory provisions stated elsewhere in the regulations. By themselves, such statements are not intended to specify regulatory requirements. Such statements are typically used for regulatory text that, while legally sufficient to specify a requirement, may be misunderstood by some readers. For example, the regulations might note that a word is defined elsewhere in the regulations to have a specific meaning that may be either narrower or broader than some readers might assume.

(e) *Examples.* Examples provided in the regulations are typically introduced by either “for example” or “such as”. Specific examples given in the regulations do not necessarily represent the most common examples. The regulations may specify examples conditionally (that is, specifying that they are applicable only if certain criteria or conditions are met). Lists of examples cannot be presumed to be exhaustive lists.

(f) *Generally and typically.* Statements that begin with “generally”, “in general”, or “typically” should not be read to apply universally or absolutely. Rather they are intended to apply for the most common circumstances. “Generally” and “typically” statements may be identified as notes as described in paragraph (d) of this section.

(g) *Unusual circumstances.* The regulations specify certain allowances that apply “in unusual circumstances”. While it is difficult to precisely define what “unusual circumstances” means, this generally refers to specific circumstances that are both rare and unforeseeable. For example, a severe hurricane in the northeastern United States may be considered to be an unusual circumstance, while a less severe hurricane in the southeastern United States may not be. Where the regulations limit an allowance to unusual circumstances, manufacturers and others should not presume that such an allowance will be available to them. Provisions related to unusual circumstances may be described using the phrase “normal circumstances”, which are those circumstances that are not unusual circumstances.

(h) *Exceptions and other specifications.* Regulatory provisions may be expressed as a general prohibition, requirement, or allowance that is modified by other regulatory text. Such provisions may include phrases such as “unless specified otherwise”, “except as specified”, or “as specified in this section”. It is important that the exceptions and the more general statement be considered together. This regulatory construct is intended to allow the core requirement or allowance to be stated in simple, clear sentences, rather than more precise and comprehensive sentences that may be misread. For example, where an action is prohibited in most but not all circumstances, the provision may state that you may not take the action, “except as specified in this section.” The exceptions could then be stated in subsequent regulatory text.

■ 232. Section 1068.35 is amended by revising the section heading to read as follows:

**§ 1068.35 Symbols, acronyms, and abbreviations.**

\* \* \* \* \*

■ 233. Section 1068.40 is amended by revising the section heading and paragraph (a) and removing paragraph (c).

The revisions read as follows:

**§ 1068.40 Special provisions for implementing changes in the regulations.**

(a) During the 12 months following the effective date of any change in the provisions of this part, you may ask to apply the previously applicable provisions. Note that the effective date is generally 30 or 60 days after publication in the **Federal Register**, as noted in the final rule. We will generally approve your request if you can demonstrate that it would be impractical to comply with the new requirements. We may consider the potential for adverse environmental impacts in our decision. Similarly, in unusual circumstances, you may ask for relief under this paragraph (a) from new requirements that apply under the standard-setting part.

\* \* \* \* \*

■ 234. Section 1068.45 is amended by revising paragraph (e) and adding paragraphs (g) and (h) to read as follows:

**§ 1068.45 General labeling provisions.**

\* \* \* \* \*

(e) *Prohibitions against removing labels.* As specified in § 1068.101(b)(7), removing permanent labels is prohibited except for certain circumstances. Removing temporary or removable labels prematurely is also prohibited by § 1068.101(b)(7).

\* \* \* \* \*

(g) *Date format.* If you use a coded approach to identify the engine/equipment’s date of manufacture, describe or interpret the code in your application for certification.

(h) *Branding.* The following provisions apply if you identify the name and trademark of another company instead of your own on your emission control information label, as provided in the standard-setting part:

(1) You must have a contractual agreement with the other company that obligates that company to take the following steps:

(i) Meet the emission warranty requirements that apply under the standard-setting part. This may involve a separate agreement involving reimbursement of warranty-related expenses.

(ii) Report all warranty-related information to the certificate holder.

(2) In your application for certification, identify the company whose trademark you will use.

(3) You remain responsible for meeting all the requirements of this chapter, including warranty and defect-reporting provisions.

■ 235. Section 1068.95 is revised to read as follows:

**§ 1068.95 Incorporation by reference.**

(a) Certain material is incorporated by reference into this part with the approval of the Director of the Federal Register under 5 U.S.C. 552(a) and 1 CFR part 51. To enforce any edition other than that specified in this section, a document must be published in the **Federal Register** and the material must be available to the public. All approved materials are available for inspection at the Air and Radiation Docket and Information Center (Air Docket) in the EPA Docket Center (EPA/DC) at Rm. 3334, EPA West Bldg., 1301 Constitution Ave. NW., Washington, DC. The EPA/DC Public Reading Room hours of operation are 8:30 a.m. to 4:30 p.m., Monday through Friday, excluding legal holidays. The telephone number of the EPA/DC Public Reading Room is (202) 566–1744, and the telephone number for the Air Docket is (202) 566–1742. These approved materials are also available for inspection at the National Archives and Records Administration (NARA). For information on the availability of this material at NARA, call (202) 741–6030 or go to [http://www.archives.gov/federal\\_register/code\\_of\\_federal\\_regulations/ibr\\_locations.html](http://www.archives.gov/federal_register/code_of_federal_regulations/ibr_locations.html). In addition, these materials are available from the sources listed below.

(b) SAE International, 400 Commonwealth Dr., Warrendale, PA 15096–0001, (724) 776–4841, or <http://www.sae.org>.

(1) SAE J1930, Electrical/Electronic Systems Diagnostic Terms, Definitions, Abbreviations, and Acronyms, revised April 2002 (“SAE J1930”), IBR approved for § 1068.45(f).

(2) [Reserved]

**Subpart B—Prohibited Actions and Related Requirements**

■ 236. Section 1068.101 is amended by revising the introductory text and paragraphs (a)(1), (b), and (h) introductory text to read as follows:

**§ 1068.101 What general actions does this regulation prohibit?**

This section specifies actions that are prohibited and the maximum civil penalties that we can assess for each violation in accordance with 42 U.S.C. 7522 and 7524. The maximum penalty values listed in paragraphs (a) and (b) of this section and in § 1068.125 apply as of December 7, 2013. As described in paragraph (h) of this section, these maximum penalty limits are different for earlier violations and they may be adjusted as set forth in 40 CFR part 19.

(a) \* \* \*

(1) *Introduction into commerce.* You may not sell, offer for sale, or introduce



or deliver into commerce in the United States or import into the United States any new engine/equipment after emission standards take effect for the engine/equipment, unless it is covered by a valid certificate of conformity for its model year and has the required label or tag. You also may not take any of the actions listed in the previous sentence with respect to any equipment containing an engine subject to this part's provisions unless the engine is covered by a valid certificate of conformity for its model year and has the required engine label or tag. We may assess a civil penalty up to \$37,500 for each engine or piece of equipment in violation.

(i) For purposes of this paragraph (a)(1), a valid certificate of conformity is one that applies for the same model year as the model year of the equipment (except as allowed by § 1068.105(a)), covers the appropriate category or subcategory of engines/equipment (such as locomotive or sterndrive/inboard Marine SI or nonhandheld Small SI), and conforms to all requirements specified for equipment in the standard-setting part. Engines/equipment are considered not covered by a certificate unless they are in a configuration described in the application for certification.

(ii) The prohibitions of this paragraph (a)(1) also apply for new engines you produce to replace an older engine in a piece of equipment, except that the engines may qualify for the replacement-engine exemption in § 1068.240.

(iii) The prohibitions of this paragraph (a)(1) also apply for new engines that will be installed in equipment subject to equipment-based standards, except that the engines may qualify for an exemption under § 1068.260(c) or § 1068.262.

(iv) Where the regulations specify that you are allowed to introduce engines/equipment into U.S. commerce without a certificate of conformity, you may take any of the otherwise prohibited actions specified in this paragraph (a)(1) with respect to those engines/equipment.

\* \* \* \* \*

(b) The following prohibitions apply to everyone with respect to the engines and equipment to which this part applies:

(1) *Tampering.* You may not remove or render inoperative any device or element of design installed on or in engines/equipment in compliance with the regulations prior to its sale and delivery to the ultimate purchaser. You also may not knowingly remove or render inoperative any such device or

element of design after such sale and delivery to the ultimate purchaser. This includes, for example, operating an engine without a supply of appropriate quality urea if the emission control system relies on urea to reduce NO<sub>x</sub> emissions or the use of incorrect fuel or engine oil that renders the emissions control system inoperative. Section 1068.120 describes how this applies to rebuilding engines. See the standard-setting part, which may include additional provisions regarding actions prohibited by this requirement. For a manufacturer or dealer, we may assess a civil penalty up to \$37,500 for each engine or piece of equipment in violation. For anyone else, we may assess a civil penalty up to \$3,750 for each engine or piece of equipment in violation. This prohibition does not apply in any of the following situations:

(i) You need to repair the engine/equipment and you restore it to proper functioning when the repair is complete.

(ii) You need to modify the engine/equipment to respond to a temporary emergency and you restore it to proper functioning as soon as possible.

(iii) You modify new engines/equipment that another manufacturer has already certified to meet emission standards and recertify them under your own family. In this case you must tell the original manufacturer not to include the modified engines/equipment in the original family.

(2) *Defeat devices.* You may not knowingly manufacture, sell, offer to sell, or install, any component that bypasses, impairs, defeats, or disables the control of emissions of any regulated pollutant, except as explicitly allowed by the standard-setting part. We may assess a civil penalty up to \$3,750 for each component in violation.

(3) *Stationary engines.* For an engine that is excluded from any requirements of this chapter because it is a stationary engine, you may not move it or install it in any mobile equipment except as allowed by the provisions of this chapter. You may not circumvent or attempt to circumvent the residence-time requirements of paragraph (2)(iii) of the nonroad engine definition in § 1068.30. Anyone violating this paragraph (b)(3) is deemed to be a manufacturer in violation of paragraph (a)(1) of this section. We may assess a civil penalty up to \$37,500 for each engine or piece of equipment in violation.

(4) *Competition engines/equipment.*

(i) For uncertified engines/equipment that are excluded or exempted as new engines/equipment from any requirements of this chapter because

they are to be used solely for competition, you may not use any of them in a manner that is inconsistent with use solely for competition. Anyone violating this paragraph (b)(4)(i) is deemed to be a manufacturer in violation of paragraph (a)(1) of this section. We may assess a civil penalty up to \$37,500 for each engine or piece of equipment in violation.

(ii) For certified nonroad engines/equipment that qualify for exemption from the tampering prohibition as described in § 1068.235 because they are to be used solely for competition, you may not use any of them in a manner that is inconsistent with use solely for competition. Anyone violating this paragraph (b)(4)(ii) is in violation of paragraph (b)(1) or (2) of this section. Certified motor vehicles and motor vehicle engines and their emission control devices must remain in their certified configuration even if they are used solely for competition or if they become nonroad vehicles or engines; anyone modifying a certified motor vehicle or motor vehicle engine for any reason is subject to the tampering and defeat device prohibitions of 40 CFR 1068.101(b) and 42 U.S.C. 7522(a)(3).

(5) *Importation.* You may not import an uncertified engine or piece of equipment if it is defined to be new in the standard-setting part with a model year for which emission standards applied. Anyone violating this paragraph (b)(5) is deemed to be a manufacturer in violation of paragraph (a)(1) of this section. We may assess a civil penalty up to \$37,500 for each engine or piece of equipment in violation. Note the following:

(i) The definition of new is broad for imported engines/equipment; uncertified engines and equipment (including used engines and equipment) are generally considered to be new when imported.

(ii) Used engines/equipment that were originally manufactured before applicable EPA standards were in effect are generally not subject to emission standards.

(6) *Warranty, recall, and maintenance instructions.* You must meet your obligation to honor your emission-related warranty under § 1068.115, including any commitments you identify in your application for certification. You must also fulfill all applicable requirements under subpart F of this part related to emission-related defects and recalls. You must also provide emission-related installation and maintenance instructions as described in the standard-setting part. Failure to meet these obligations is prohibited. Also, except as specifically

provided by regulation, you are prohibited from directly or indirectly communicating to the ultimate purchaser or a later purchaser that the emission-related warranty is valid only if the owner has service performed at authorized facilities or only if the owner uses authorized parts, components, or systems. We may assess a civil penalty up to \$37,500 for each engine or piece of equipment in violation.

(7) *Labeling.* (i) You may not remove or alter an emission control information label or other required permanent label except as specified in this paragraph (b)(7) or otherwise allowed by this chapter. Removing or altering an emission control information label is a violation of paragraph (b)(1) of this section. However, it is not a violation to remove a label in the following circumstances:

(A) The engine is destroyed, is permanently disassembled, or otherwise loses its identity such that the original title to the engine is no longer valid.

(B) The regulations specifically direct you to remove the label. For example, see § 1068.235.

(C) The part on which the label is mounted needs to be replaced. In this case, you must have a replacement part with a duplicate of the original label installed by the certifying manufacturer or an authorized agent, except that the replacement label may omit the date of manufacture if applicable. We generally require labels to be permanently attached to parts that will not normally be replaced, but this provision allows for replacements in unusual circumstances, such as damage in a collision or other accident.

(D) The original label is incorrect, provided that it is replaced with the correct label from the certifying manufacturer or an authorized agent. This allowance to replace incorrect labels does not affect whether the application of an incorrect original label is a violation.

(ii) Removing or altering a temporary or removable label contrary to the provisions of this paragraph (b)(7)(ii) is a violation of paragraph (b)(1) of this section.

(A) For labels identifying temporary exemptions, you may not remove or alter the label while the engine/equipment is in an exempt status. The exemption is automatically revoked for each engine/equipment for which the label has been removed.

(B) For temporary or removable consumer information labels, only the ultimate purchaser may remove the label.

(iii) You may not apply a false emission control information label. You

also may not manufacture, sell, or offer to sell false labels. The application, manufacture, sale, or offer for sale of false labels is a violation of this section (such as paragraph (a)(1) or (b)(2) of this section). Note that applying an otherwise valid emission control information label to the wrong engine is considered to be applying a false label.

(iv) Information on engine/equipment labels as specified in this chapter is deemed to be information submitted to EPA and is therefore subject to the prohibition against knowingly submitting false information under paragraph (a)(2) of this section and 18 U.S.C. 1001.

\* \* \* \* \*

(h) The maximum penalty values listed in paragraphs (a) and (b) of this section and in § 1068.125 apply as of December 7, 2013. Maximum penalty values for earlier violations are published in 40 CFR part 19. Maximum penalty limits may be adjusted after December 7, 2013 based on the Consumer Price Index. The specific regulatory provisions for changing the maximum penalties, published in 40 CFR part 19, reference the applicable U.S. Code citation on which the prohibited action is based. The following table is shown here for informational purposes:

\* \* \* \* \*

■ 237. Section 1068.103 is revised to read as follows:

**§ 1068.103 Provisions related to the duration and applicability of certificates of conformity.**

(a) Engines/equipment covered by a certificate of conformity are limited to those that are produced during the period specified in the certificate and conform to the specifications described in the certificate and the associated application for certification. For the purposes of this paragraph (a), “specifications” includes the emission control information label and any conditions or limitations identified by the manufacturer or EPA. For example, if the application for certification specifies certain engine configurations, the certificate does not cover any configurations that are not specified. We may ignore any information provided in the application that we determine is not relevant to a demonstration of compliance with applicable regulations, such as your projected production volumes in many cases.

(b) Unless the standard-setting part specifies otherwise, determine the production period corresponding to each certificate of conformity as specified in this paragraph (b). In general, the production period is the

manufacturer’s annual production period identified as a model year.

(1) For engines/equipment subject to emission standards based on model years, the first day of the annual production period can be no earlier than January 2 of the calendar year preceding the year for which the model year is named, or the earliest date of manufacture for any engine/equipment in the engine family, whichever is later. The last day of the annual production period can be no later than December 31 of the calendar year for which the model year is named or the latest date of manufacture for any engine/equipment in the engine family, whichever is sooner. Note that this approach limits how you can designate a model year for your engines/equipment; however, it does not limit your ability to meet more stringent emission standards early where this is permitted in the regulation.

(2) For fuel-system components certified to evaporative emission standards based on production periods rather than model years, the production period is either the calendar year or a longer period we specify consistent with the manufacturer’s normal production practices.

(c) A certificate of conformity will not cover engines/equipment you produce with a date of manufacture earlier than the date you submit the application for certification for the family. You may start to produce engines/equipment after you submit an application for certification and before the effective date of a certificate of conformity, subject to the following conditions:

(1) The engines/equipment must conform in all material respects to the engines/equipment described in your application. Note that if we require you to modify your application, you must ensure that all engines/equipment conform to the specifications of the modified application.

(2) The engines/equipment may not be sold, offered for sale, introduced into U.S. commerce, or delivered for introduction into U.S. commerce before the effective date of the certificate of conformity.

(3) You must notify us in your application for certification that you plan to use the provisions of this paragraph (c) and when you intend to start production. If the standard-setting part specifies mandatory testing for production-line engines, you must start testing as directed in the standard-setting part based on your actual start of production, even if that occurs before we approve your certification. You must also agree to give us full opportunity to inspect and/or test the engines/

equipment during and after production. For example, we must have the opportunity to specify selective enforcement audits as allowed by the standard-setting part and the Clean Air Act as if the engines/equipment were produced after the effective date of the certificate.

(4) See § 1068.262 for special provisions that apply for secondary engine manufacturers receiving shipment of partially complete engines before the effective date of a certificate.

(d) The prohibition in § 1068.101(a)(1) against offering to sell engines/equipment without a valid certificate of conformity generally does not apply for engines/equipment that have not yet been produced. You may contractually agree to produce engines/equipment before obtaining the required certificate of conformity. This is intended to allow manufacturers of low-volume products to establish a sufficient market for engines/equipment before going through the effort to certify.

(e) Engines/equipment with a date of manufacture after December 31 of the calendar year for which a model year is named are not covered by the certificate of conformity for that model year. You must submit an application for a new certificate of conformity demonstrating compliance with applicable standards even if the engines/equipment are identical to those built before December 31.

(f) The flexible approach to naming the annual production period described in paragraph (b)(1) of this section is intended to allow you to introduce new products at any point during the year. This is based on the expectation that production periods generally run on consistent schedules from year to year. You may not use this flexibility to arrange your production periods such that you can avoid annual certification.

(g) An engine is generally assigned a model year based on its date of manufacture, which is typically based on the date the crankshaft is installed in the engine (see § 1068.30). You may not circumvent the provisions of § 1068.101(a)(1) by stockpiling engines with a date of manufacture before new or changed emission standards take effect by deviating from your normal production and inventory practices. (For purposes of this paragraph (g), normal production and inventory practices means those practices you typically use for similar families in years in which emission standards do not change. We may require you to provide us routine production and inventory records that document your normal practices for the preceding eight years.) For most engines you should plan to complete the

assembly of an engine of a given model year into its certified configuration within the first week after the end of the model year if new emission standards start to apply in that model year. For special circumstances it may be appropriate for your normal business practice to involve more time. For engines with per-cylinder displacement below 2.5 liters, if new emission standards start to apply in a given year, we would consider an engine not to be covered by a certificate of conformity for the preceding model year if the engine is not assembled in a compliant configuration within 30 days after the end of the model year for that engine family. (**Note:** an engine is considered “in a compliant configuration” without being fully assembled if § 1068.260(a) or (b) authorizes shipment of the engine without certain components.) For example, in the case where new standards apply in the 2010 model year, and your normal production period is based on the calendar year, you must complete the assembly of all your 2009 model year engines before January 31, 2010, or an earlier date consistent with your normal production and inventory practices. For engines with per-cylinder displacement at or above 2.5 liters, this time may not exceed 60 days. Note that for the purposes of this paragraph (g), an engine shipped under § 1068.261 is deemed to be a complete engine. Note also that § 1068.245 allows flexibility for additional time in unusual circumstances. Note finally that disassembly of complete engines and reassembly (such as for shipment) does not affect the determination of model year; the provisions of this paragraph (g) apply based on the date on which initial assembly is complete.

(h) This paragraph (h) describes the effect of suspending, revoking, or voiding a certificate of conformity. See the definitions of “suspend,” “revoke,” and “void” in § 1068.30. Engines/equipment produced at a time when the otherwise applicable certificate of conformity has been suspended or revoked are not covered by a certificate of conformity. Where a certificate of conformity is void, all engines/equipment produced under that certificate of conformity are not and were not covered by a certificate of conformity. In cases of suspension, engines/equipment will be covered by a certificate only if they are produced after the certificate is reinstated or a new certificate is issued. In cases of revocation and voiding, engines/equipment will be covered by a certificate only if they are produced after we issue a new certificate. 42

U.S.C. 7522(a)(1) and § 1068.101(a)(1) prohibit selling, offering for sale, introducing into commerce, delivering for introduction into commerce, and importing engines/equipment that are not covered by a certificate of conformity, and they prohibit anyone from causing another to violate these prohibitions.

(i) You may transfer a certificate to another entity only in the following cases:

(1) You may transfer a certificate to a parent company, including a parent company that purchases your company after we have issued your certificate.

(2) You may transfer a certificate to a subsidiary including a subsidiary you purchase after we have issued your certificate.

(3) You may transfer a certificate to a subsidiary of your parent company.

■ 238. Section 1068.105 is amended by revising paragraphs (a) and (c)(2) to read as follows:

**§ 1068.105 What other provisions apply to me specifically if I manufacture equipment needing certified engines?**

\* \* \* \* \*

(a) *Transitioning to new engine-based standards.* If new engine-based emission standards apply in a given model year, your equipment produced in that calendar year (or later) must have engines that are certified to the new standards, except that you may continue to use up normal inventories of earlier engines that were built before the date of the new or changed standards. For purposes of this paragraph (a), normal inventory applies for engines you possess and engines from your engine supplier's normal inventory. (**Note:** this paragraph (a) does not apply in the case of new remanufacturing standards.) We may require you and your engine suppliers to provide us routine production and/or inventory records that document your normal practices for the preceding eight years. For example, if you have records documenting that your normal inventory practice is to keep on hand a one-month supply of engines based on your upcoming production schedules, and a new tier of standards starts to apply for the 2015 model year, you may order engines consistent with your normal inventory requirements late in the engine manufacturer's 2014 model year and install those engines in your equipment consistent with your normal production schedule. Also, if your model year starts before the end of the calendar year preceding new standards, you may use engines from the previous model year for those units you completely assemble before January 1 of the year that new

standards apply. If emission standards for the engine do not change in a given model year, you may continue to install engines from the previous model year without restriction (or any earlier model year for which the same standards apply). You may not circumvent the provisions of § 1068.101(a)(1) by stockpiling engines that were built before new or changed standards take effect. Similarly, you may not circumvent the provisions of § 1068.101(a)(1) by knowingly installing engines that were stockpiled by engine suppliers in violation of § 1068.103(f). Note that this allowance does not apply for equipment subject to equipment-based standards. See 40 CFR 1060.601 for similar provisions that apply for equipment subject to evaporative emission standards. Note that the standard-setting part may impose further restrictions on using up inventories of engines from an earlier model year under this paragraph (a).

\* \* \* \* \*

(c) \* \* \*

(2) Permanently attach the duplicate label to your equipment by securing it to a part needed for normal operation and not normally requiring replacement. Make sure an average person can easily read it. Note that attaching an inaccurate duplicate label may be a violation of § 1068.101(b)(7).

\* \* \* \* \*

■ 239. Section 1068.110 is amended by revising the section heading and paragraph (d) to read as follows:

**§ 1068.110 Other provisions for engines/equipment in service.**

\* \* \* \* \*

(d) *Defeat devices.* We may test components, engines, and equipment to investigate potential defeat devices. We may also require the manufacturer to do this testing. If we choose to investigate one of your designs, we may require you to show us that a component is not a defeat device, and that an engine/equipment does not have a defeat device. To do this, you may have to share with us information regarding test programs, engineering evaluations, design specifications, calibrations, on-board computer algorithms, and design strategies. It is a violation of the Clean Air Act for anyone to make, install or use defeat devices as described in § 1068.101(b)(2) and the standard-setting part.

\* \* \* \* \*

■ 240. Section 1068.115 is amended by revising the section heading to read as follows:

**§ 1068.115 What are manufacturers' emission-related warranty requirements?**

\* \* \* \* \*

■ 241. Section 1068.120 is amended by revising the section heading and paragraph (f) to read as follows:

**§ 1068.120 Requirements for rebuilding engines.**

\* \* \* \* \*

(f) A rebuilt engine or other used engine may replace a certified engine in a piece of equipment only if the engine was built and/or rebuilt to a certified configuration meeting equivalent or more stringent emission standards. Note that a certified configuration would generally include more than one model year. A rebuilt engine being installed that is from the same model year or a newer model year than the engine being replaced meets this requirement. The following examples illustrate the provisions of this paragraph (f):

(1) In most cases, you may use a rebuilt Tier 2 engine to replace a Tier 1 engine or another Tier 2 engine.

(2) You may use a rebuilt Tier 1 engine to replace a Tier 2 engine if the two engines differ only with respect to model year or other characteristics unrelated to emissions since such engines would be considered to be in the same configuration. This may occur if the Tier 1 engine had emission levels below the Tier 2 standards or if the Tier 2 engine was certified with a Family Emission Limit for calculating emission credits.

(3) You may use a rebuilt engine that originally met the Tier 1 standards without certification, as provided under § 1068.265, to replace a certified Tier 1 engine. This may occur for engines produced under a Transition Program for Equipment Manufacturers such as that described in 40 CFR 1039.625.

(4) You may never replace a certified engine with an engine rebuilt to a configuration that does not meet EPA emission standards. Note that, for purposes of this paragraph (f)(4), a configuration is considered to meet EPA emission standards if it was previously certified or was otherwise shown to meet emission standards (see § 1068.265).

\* \* \* \* \*

■ 242. Section 1068.125 is amended by revising paragraph (b) introductory text to read as follows:

**§ 1068.125 What happens if I violate the regulations?**

\* \* \* \* \*

(b) *Administrative penalties.* Instead of bringing a civil action, we may assess administrative penalties if the total is less than \$320,000 against you

individually. This maximum penalty may be greater if the Administrator and the Attorney General jointly determine that a greater administrative penalty assessment is appropriate, or if the limit is adjusted under 40 CFR part 19. No court may review this determination. Before we assess an administrative penalty, you may ask for a hearing as described in subpart G of this part. The Administrator may compromise or remit, with or without conditions, any administrative penalty that may be imposed under this section.

\* \* \* \* \*

**Subpart C—Exemptions and Exclusions**

■ 243. Section 1068.201 is amended by revising the section heading and paragraphs (a), (c), and (i) to read as follows:

**§ 1068.201 General exemption and exclusion provisions.**

\* \* \* \* \*

(a) This subpart identifies which engines/equipment qualify for exemptions and what information we need. We may require more information.

\* \* \* \* \*

(c) If you use an exemption under this subpart, we may require you to add a permanent or temporary label to your exempted engines/equipment. You may ask us to modify these labeling requirements if it is appropriate for your engine/equipment.

\* \* \* \* \*

(i) If you want to take an action with respect to an exempted or excluded engine/equipment that is prohibited by the exemption or exclusion, such as selling it, you need to certify the engine/equipment or qualify for a different exemption.

(1) We will issue a certificate of conformity if you send us an application for certification showing that you meet all the applicable requirements from the standard-setting part and pay the appropriate fee. Alternatively, we may allow you to include in an existing certified engine family those engines/equipment you modify (or otherwise demonstrate) to be identical to engines/equipment already covered by the certificate. We would base such an approval on our review of any appropriate documentation. These engines/equipment must have emission control information labels that accurately describe their status.

(2) The exemption provisions of this part may be applied to new engines without regard to whether or not they have already been certified or exempted. You may ask to apply the exemption

provisions prospectively to used engines to cover circumstances not otherwise allowed by the original certification or exemption. Note that application of new exemption provisions does not apply with respect to actions that occur before the new exemption applies. For example, you may ask for a testing exemption for a new or used engine that has already been introduced into commerce under a competition exemption, but the testing exemption would not cover non-competition use that occurred before we approved the testing exemption.

■ 244. Section 1068.210 is amended by revising the section heading and paragraph (e) to read as follows:

**§ 1068.210 Exempting test engines/equipment.**

\* \* \* \* \*

(e) If we approve your request for a testing exemption, we will send you a letter or a memorandum describing the basis and scope of the exemption. It will also include any necessary terms and conditions, which normally require you to do the following:

(1) Stay within the scope of the exemption.

(2) Create and maintain adequate records that we may inspect.

(3) Add a permanent label to all engines/equipment exempted under this section, consistent with § 1068.45, with at least the following items:

(i) The label heading “EMISSION CONTROL INFORMATION”.

(ii) Your corporate name and trademark.

(iii) Engine displacement, family identification, and model year of the engine/equipment (as applicable), or whom to contact for further information.

(iv) The statement: “THIS [engine, equipment, vehicle, etc.] IS EXEMPT UNDER 40 CFR 1068.210 OR 1068.215 FROM EMISSION STANDARDS AND RELATED REQUIREMENTS.”

(4) Tell us when the test program is finished.

(5) Tell us the final disposition of the engines/equipment.

■ 245. Section 1068.215 is amended by revising the section heading and paragraphs (a) and (c)(3)(iv) to read as follows:

**§ 1068.215 Exempting manufacturer-owned engines/equipment.**

(a) You are eligible for this exemption for manufacturer-owned engines/equipment only if you are a certificate holder. Any engine for which you meet all applicable requirements under this section is exempt without request.

\* \* \* \* \*

(c) \* \* \*

(3) \* \* \*

(iv) The statement: “THIS [engine, equipment, vehicle, etc.] IS EXEMPT UNDER 40 CFR 1068.210 OR 1068.215 FROM EMISSION STANDARDS AND RELATED REQUIREMENTS.”

■ 246. Section 1068.220 is revised to read as follows:

**§ 1068.220 Exempting display engines/equipment.**

(a) Anyone may request an exemption for display engines/equipment.

(b) Nonconforming display engines/equipment will be exempted if they are used only for displays in the interest of a business or the general public. This exemption does not apply to engines/equipment displayed for private use, private collections, or any other purpose we determine is inappropriate for a display exemption.

(c) You may operate the exempted engine/equipment, but only if we approve specific operation that is part of the display, or is necessary for the display (possibly including operation that is indirectly necessary for the display). We may consider any relevant factor in our approval process, including the extent of the operation, the overall emission impact, and whether the engine/equipment meets emission requirements of another country.

(d) You may sell or lease the exempted engine/equipment only with our advance approval.

(e) To use this exemption, you must add a permanent label to all engines/equipment exempted under this section, consistent with § 1068.45, with at least the following items:

(1) The label heading “EMISSION CONTROL INFORMATION”.

(2) Your corporate name and trademark.

(3) Engine displacement, family identification, and model year of the engine/equipment (as applicable), or whom to contact for further information.

(4) The statement: “THIS [engine, equipment, vehicle, etc.] IS EXEMPT UNDER 40 CFR 1068.220 FROM EMISSION STANDARDS AND RELATED REQUIREMENTS.”

(f) We may set other conditions for approval of this exemption.

■ 247. Section 1068.225 is amended by revising the section heading and paragraph (d)(4) to read as follows:

**§ 1068.225 Exempting engines/equipment for national security.**

\* \* \* \* \*

(d) \* \* \*

(4) The statement: “THIS [engine, equipment, vehicle, etc.] HAS AN EXEMPTION FOR NATIONAL SECURITY UNDER 40 CFR 1068.225.”

■ 248. Section 1068.230 is amended by revising the section heading and paragraphs (b) and (c) to read as follows:

**§ 1068.230 Exempting engines/equipment for export.**

\* \* \* \* \*

(b) Engines/equipment exported to a country not covered by paragraph (a) of this section are exempt from the prohibited acts in this part without a request. If you produce exempt engines/equipment for export and any of them are sold or offered for sale to an ultimate purchaser in the United States, the exemption is automatically void for those engines/equipment, except as specified in § 1068.201(i). You may operate engines/equipment in the United States only as needed to prepare and deliver them for export.

(c) Except as specified in paragraph (d) of this section, label exempted engines/equipment (including shipping containers if the label on the engine/equipment will be obscured by the container) with a label showing that they are not certified for sale or use in the United States. This label may be permanent or removable. See § 1068.45 for provisions related to the use of removable labels and applying labels to containers without labeling individual engines/equipment. The label must include your corporate name and trademark and the following statement: “THIS [engine, equipment, vehicle, etc.] IS SOLELY FOR EXPORT AND IS THEREFORE EXEMPT UNDER 40 CFR 1068.230 FROM U.S. EMISSION STANDARDS AND RELATED REQUIREMENTS.”

\* \* \* \* \*

■ 249. Section 1068.235 is revised to read as follows:

**§ 1068.235 Exempting nonroad engines/equipment used solely for competition.**

The following provisions apply for nonroad engines/equipment, but not for motor vehicles:

(a) New nonroad engines/equipment you produce that are used solely for competition are excluded from emission standards. We may exempt (rather than exclude) new nonroad engines/equipment you produce that you intend to be used solely for competition, where we determine that such engines/equipment are unlikely to be used contrary to your intent. See the standard-setting parts for specific provisions where applicable. Note that the definitions in the standard-setting part may deem uncertified engines/equipment to be new upon importation.

(b) If you modify any nonroad engines/equipment after they have been placed into service in the United States

so they will be used solely for competition, they are exempt without request. This exemption applies only to the prohibitions in § 1068.101(b)(1) and (2) and are valid only as long as the engine/equipment is used solely for competition. You may not use the provisions of this paragraph (b) to circumvent the requirements that apply to the sale of new competition engines under the standard-setting part.

(c) If you modify any nonroad engines/equipment under paragraph (b) of this section, you must destroy the original emission labels. If you loan, lease, sell, or give any of these engines/equipment to someone else, you must tell the new owner (or operator, if applicable) in writing that they may be used only for competition.

■ 250. Section 1068.240 is amended by revising the section heading and paragraphs (c)(1), (c)(3), and (e) introductory text to read as follows:

**§ 1068.240 Exempting new replacement engines.**

\* \* \* \* \*

(c) \* \* \*

(1) You may produce a limited number of replacement engines under this paragraph (c) representing 0.5 percent of your annual production volumes for each category and subcategory of engines identified in Table 1 to this section (1.0 percent through 2013). Calculate this number by multiplying your annual U.S.-directed production volume by 0.005 (or 0.01 through 2013) and rounding to the nearest whole number. Determine the appropriate production volume by identifying the highest total annual U.S.-directed production volume of engines from the previous three model years for all your certified engines from each category or subcategory identified in Table 1 to this section, as applicable. In unusual circumstances, you may ask us to base your production limits on U.S.-directed production volume for a model year more than three years prior. You may include stationary engines and exempted engines as part of your U.S.-directed production volume. Include U.S.-directed engines produced by any affiliated companies and those from any other companies you license to produce engines for you.

\* \* \* \* \*

(3) Send the Designated Compliance Officer a report by September 30 of the year following any year in which you produced exempted replacement engines under this paragraph (c). In your report include the total number of replacement engines you produce under this paragraph (c) for each category or subcategory, as appropriate, and the

corresponding total production volumes determined under paragraph (c)(1) of this section. If you send us a report under this paragraph (c)(3), you must also include the total number of replacement engines you produced under paragraphs (b), (d), and (e) of this section. Count exempt engines as tracked under paragraph (b) of this section only if you meet all the requirements and conditions that apply under paragraph (b) of this section by the due date for the annual report. You may include the information required under this paragraph (c)(3) in production reports required under the standard-setting part.

\* \* \* \* \*

(e) *Partially complete current-tier replacement engines.* The provisions of paragraph (d) of this section apply for engines you produce from a current line of certified engines or vehicles if you ship them as partially complete engines for replacement purposes. This applies for engine-based and equipment-based standards as follows:

\* \* \* \* \*

■ 251. Section 1068.245 is amended by revising the section heading and paragraph (g)(4) to read as follows:

**§ 1068.245 Temporary provisions addressing hardship due to unusual circumstances.**

\* \* \* \* \*

(g) \* \* \*

(4) A statement describing the engine's status as an exempted engine:

(i) If the engine/equipment does not meet any emission standards, add the following statement: "THIS [engine, equipment, vehicle, etc.] IS EXEMPT UNDER 40 CFR 1068.245 FROM EMISSION STANDARDS AND RELATED REQUIREMENTS."

(ii) If the engines/equipment meet alternate emission standards as a condition of an exemption under this section, we may specify a different statement to identify the alternate emission standards.

■ 252. Section 1068.250 is amended by revising the section heading and paragraphs (c) introductory text and (k)(4) and removing and reserving paragraph (h).

The revisions read as follows:

**§ 1068.250 Extending compliance deadlines for small businesses under hardship.**

\* \* \* \* \*

(c) Send the Designated Compliance Officer a written request for an extension as soon as possible before you are in violation. In your request, show

that all the following conditions and requirements apply:

\* \* \* \* \*

(k) \* \* \*

(4) A statement describing the engine's status as an exempted engine:

(i) If the engine/equipment does not meet any emission standards, add the following statement: "THIS [engine, equipment, vehicle, etc.] IS EXEMPT UNDER 40 CFR 1068.250 FROM EMISSION STANDARDS AND RELATED REQUIREMENTS."

(ii) If the engine/equipment meets alternate emission standards as a condition of an exemption under this section, we may specify a different statement to identify the alternate emission standards.

■ 253. Section 1068.255 is amended by revising the section heading and paragraph (a) introductory text to read as follows:

**§ 1068.255 Exempting engines and fuel-system components for hardship for equipment manufacturers and secondary engine manufacturers.**

\* \* \* \* \*

(a) *Equipment exemption.* As an equipment manufacturer, you may ask for approval to produce exempted equipment for up to 12 months. We will generally limit this to a single interval up to 12 months in the first year that new or revised emission standards apply. Exemptions under this section are not limited to small businesses. Send the Designated Compliance Officer a written request for an exemption before you are in violation. In your request, you must show you are not at fault for the impending violation and that you would face serious economic hardship if we do not grant the exemption. This exemption is not available under this paragraph (a) if you manufacture the engine or fuel-system components you need for your own equipment, or if complying engines or fuel-system components are available from other manufacturers that could be used in your equipment, unless we allow it elsewhere in this chapter. We may impose other conditions, including provisions to use products meeting less stringent emission standards or to recover the lost environmental benefit. In determining whether to grant the exemptions, we will consider all relevant factors, including the following:

\* \* \* \* \*

■ 254. Section 1068.260 is revised to read as follows:

**§ 1068.260 General provisions for selling or shipping engines that are not yet in their certified configuration.**

Except as specified in paragraph (e) of this section, all new engines in the United States are presumed to be subject to the prohibitions of § 1068.101, which generally require that all new engines be in a certified configuration before being sold, offered for sale, or introduced or delivered into commerce in the United States or imported into the United States. All emission-related components generally need to be installed on an engine for such an engine to be in its certified configuration. This section specifies clarifications and exemptions related to these requirements for engines. Except for paragraph (c) of this section, the provisions of this section generally apply for engine-based standards but not for equipment-based exhaust emission standards.

(a) The provisions of this paragraph (a) apply for emission-related components that cannot practically be assembled before shipment because they depend on equipment design parameters.

(1) You do not need an exemption to ship an engine that does not include installation or assembly of certain emission-related components, if those components are shipped along with the engine. For example, you may generally ship aftertreatment devices along with engines rather than installing them on the engine before shipment. We may require you to describe how you plan to use this provision.

(2) You may ask us at the time of certification for an exemption to allow you to ship your engines without emission-related components. If we allow this, we may specify conditions that we determine are needed to ensure that shipping the engine without such components will not result in the engine being operated outside of its certified configuration. You must identify unshipped parts by specific part numbers if they cannot be properly characterized by performance specification. For example, electronic control units, turbochargers, and EGR coolers must generally be identified by part number. Parts that we believe can be properly characterized by performance specification include air filters, noncatalyzed mufflers, and charge air coolers. See paragraph (d) of this section for additional provisions that apply in certain circumstances.

(b) You do not need an exemption to ship engines without specific components if they are not emission-related components identified in Appendix I of this part. For example,

you may generally ship engines without the following parts:

(1) Radiators needed to cool the engine.

(2) Exhaust piping between the engine and an aftertreatment device, between two aftertreatment devices, or downstream of the last aftertreatment device.

(c) If you are a certificate holder, partially complete engines/equipment shipped between two of your facilities are exempt, subject to the provisions of this paragraph (c), as long as you maintain ownership and control of the engines/equipment until they reach their destination. We may also allow this where you do not maintain actual ownership and control of the engines/equipment (such as hiring a shipping company to transport the engines) but only if you demonstrate that the engines/equipment will be transported only according to your specifications. See § 1068.261(b) for the provisions that apply instead of this paragraph (c) for the special case of integrated manufacturers using the delegated-assembly exemption. Notify us of your intent to use this exemption in your application for certification, if applicable. Your exemption is effective when we grant your certificate. You may alternatively request an exemption in a separate submission; for example, this would be necessary if you will not be the certificate holder for the engines in question. We may require you to take specific steps to ensure that such engines/equipment are in a certified configuration before reaching the ultimate purchaser. Note that since this is a temporary exemption, it does not allow you to sell or otherwise distribute to ultimate purchasers an engine/equipment in an uncertified configuration with respect to exhaust emissions. Note also that the exempted engine/equipment remains new and subject to emission standards (see definition of “exempted” in § 1068.30) until its title is transferred to the ultimate purchaser or it otherwise ceases to be new.

(d) See § 1068.261 for delegated-assembly provisions in which certificate-holding manufacturers ship engines that are not yet equipped with certain emission-related components. See § 1068.262 for provisions related to manufacturers shipping partially complete engines for which a secondary engine manufacturer holds the certificate of conformity.

(e) Engines used in hobby vehicles are not presumed to be engines subject to the prohibitions of § 1068.101. Hobby vehicles are reduced-scale models of vehicles that are not capable of

transporting a person. Some gas turbine engines are subject to the prohibitions of § 1068.101, but we do not presume that all gas turbine engines are subject to these prohibitions. Other engines that do not have a valid certificate of conformity or exemption when sold, offered for sale, or introduced or delivered into commerce in the United States or imported into the United States are presumed to be engines subject to the prohibitions of § 1068.101 unless we determine that such engines are excluded from the prohibitions of § 1068.101.

(f) While we presume that new non-hobby engines are subject to the prohibitions of § 1068.101, we may determine that a specific engine is not subject to these prohibitions based on information you provide or other information that is available to us. For example, the provisions of this part 1068 and the standard-setting parts provide for exemptions in certain circumstances. Also, some engines may be subject to separate prohibitions under subchapter C instead of the prohibitions of § 1068.101.

■ 255. Section 1068.261 is amended by revising the section heading and paragraph (a) to read as follows:

**§ 1068.261 Delegated assembly and other provisions related to engines not yet in the certified configuration.**

\* \* \* \* \*

(a) Shipping an engine separately from an aftertreatment component that you have specified as part of its certified configuration will not be a violation of the prohibitions in § 1068.101(a)(1) subject to the provisions in this section. We may also require that you apply some or all of the provisions of this section for other components if we determine it is necessary to ensure that shipping the engine without such components will not result in the engine being operated outside of its certified configuration. In making this determination, we will consider the importance of the component for controlling emissions and the likelihood that equipment manufacturers will have an incentive to disregard your emission-related installation instructions based on any relevant factors, such as the cost of the component and any real or perceived expectation of a negative impact on engine or equipment performance.

\* \* \* \* \*

■ 256. Section 1068.262 is revised to read as follows:



**§ 1068.262 Shipment of engines to secondary engine manufacturers.**

This section specifies how manufacturers may introduce into U.S. commerce partially complete engines that have an exemption or a certificate of conformity held by a secondary engine manufacturer and are not yet in a certified configuration. See the standard-setting part to determine whether and how the provisions of this section apply. (**Note:** See § 1068.261 for provisions related to manufacturers introducing into U.S. commerce partially complete engines for which they hold the certificate of conformity.) This exemption is temporary as described in paragraph (g) of this section.

(a) The provisions of this section generally apply where the secondary engine manufacturer has substantial control over the design and assembly of emission controls. In unusual circumstances we may allow other secondary engine manufacturers to use these provisions. In determining whether a manufacturer has substantial control over the design and assembly of emission controls, we would consider the degree to which the secondary engine manufacturer would be able to ensure that the engine will conform to the regulations in its final configuration. Such secondary engine manufacturers may finish assembly of partially complete engines in the following cases:

(1) You obtain an engine that is not fully assembled with the intent to manufacture a complete engine.

(2) You obtain an engine with the intent to modify it before it reaches the ultimate purchaser.

(3) You obtain an engine with the intent to install it in equipment that will be subject to equipment-based standards.

(b) Manufacturers may introduce into U.S. commerce partially complete engines as described in this section if they have a written request for such engines from a secondary engine manufacturer that has certified the engine and will finish the engine assembly. The written request must include a statement that the secondary engine manufacturer has a certificate of conformity for the engine and identify a valid engine family name associated with each engine model ordered (or the basis for an exemption if applicable, as specified in paragraph (e) of this section). The original engine manufacturer must apply a removable label meeting the requirements of § 1068.45 that identifies the corporate name of the original manufacturer and states that the engine is exempt under the provisions of § 1068.262. The name

of the certifying manufacturer must also be on the label or, alternatively, on the bill of lading that accompanies the engines during shipment. The original engine manufacturer may not apply a permanent emission control information label identifying the engine's eventual status as a certified engine.

(c) If you are the secondary engine manufacturer and you will hold the certificate, you must include the following information in your application for certification:

(1) Identify the original engine manufacturer of the partially complete engine or of the complete engine you will modify.

(2) Describe briefly how and where final assembly will be completed. Specify how you have the ability to ensure that the engines will conform to the regulations in their final configuration. (**Note:** Paragraph (a) of this section prohibits using the provisions of this section unless you have substantial control over the design and assembly of emission controls.)

(3) State unconditionally that you will not distribute the engines without conforming to all applicable regulations.

(d) If you are a secondary engine manufacturer and you are already a certificate holder for other families, you may receive shipment of partially complete engines after you apply for a certificate of conformity but before the certificate's effective date. In this case, all the provisions of § 1068.103(c)(1) through (3) apply. This exemption allows the original manufacturer to ship engines after you have applied for a certificate of conformity. Manufacturers may introduce into U.S. commerce partially complete engines as described in this paragraph (d) if they have a written request for such engines from a secondary engine manufacturer stating that the application for certification has been submitted (instead of the information we specify in paragraph (b) of this section). We may set additional conditions under this paragraph (d) to prevent circumvention of regulatory requirements. Consistent with § 1068.103(c), we may also revoke an exemption under this paragraph (d) if we have reason to believe that the application for certification will not be approved or that the engines will otherwise not reach a certified configuration before reaching the ultimate purchaser. This may require that you export the engines.

(e) The provisions of this section also apply for shipping partially complete engines if the engine is covered by a valid exemption and there is no valid engine family name that could be used to represent the engine model. Unless

we approve otherwise in advance, you may do this only when shipping engines to secondary engine manufacturers that are certificate holders. In this case, the secondary engine manufacturer must identify the regulatory cite identifying the applicable exemption instead of a valid engine family name when ordering engines from the original engine manufacturer.

(f) If secondary engine manufacturers determine after receiving an engine under this section that the engine will not be covered by a certificate or exemption as planned, they may ask us to allow for shipment of the engines back to the original engine manufacturer or to another secondary engine manufacturer. This might occur in the case of an incorrect shipment or excess inventory. We may modify the provisions of this section as appropriate to address these cases.

(g) Both original and secondary engine manufacturers must keep the records described in this section for at least five years, including the written request for engines and the bill of lading for each shipment (if applicable). The written request is deemed to be a submission to EPA and is thus subject to the reporting requirements of 40 CFR 1068.101(a)(2).

(h) These provisions are intended only to allow secondary engine manufacturers to obtain or transport engines in the specific circumstances identified in this section so any exemption under this section expires when the engine reaches the point of final assembly identified in paragraph (c)(2) of this section.

(i) For purposes of this section, an allowance to introduce partially complete engines into U.S. commerce includes a conditional allowance to sell, introduce, or deliver such engines into commerce in the United States or import them into the United States. It does not include a general allowance to offer such partially complete engines for sale because this exemption is intended to apply only for cases in which the certificate holder already has an arrangement to purchase the engines from the original engine manufacturer. This exemption does not allow the original engine manufacturer to subsequently offer the engines for sale to a different manufacturer who will hold the certificate unless that second manufacturer has also complied with the requirements of this part. The exemption does not apply for any individual engines that are not labeled as specified in this section or which are shipped to someone who is not a certificate holder.



(j) We may suspend, revoke, or void an exemption under this section, as follows:

(1) We may suspend or revoke your exemption if you fail to meet the requirements of this section. We may suspend or revoke an exemption related to a specific secondary engine manufacturer if that manufacturer sells engines that are in not in a certified configuration in violation of the regulations. We may disallow this exemption for future shipments to the affected secondary engine manufacturer or set additional conditions to ensure that engines will be assembled in the certified configuration.

(2) We may void an exemption for all the affected engines if you intentionally submit false or incomplete information or fail to keep and provide to EPA the records required by this section.

(3) The exemption is void for an engine that is shipped to a company that is not a certificate holder or for an engine that is shipped to a secondary engine manufacturer that is not in compliance with the requirements of this section.

(4) The secondary engine manufacturer may be liable for causing a prohibited act if voiding the exemption is due to its own actions.

(k) No exemption is needed to import equipment that does not include an engine. No exemption from exhaust emission standards is available under this section for equipment subject to equipment-based standards if the engine has been installed.

■ 257. Section 1068.265 is amended by revising the section heading to read as follows:

**§ 1068.265 Provisions for engines/equipment conditionally exempted from certification.**

\* \* \* \* \*

**Subpart D—Imports**

■ 258. Section 1068.301 is amended by revising the section heading and paragraphs (b) and (d) and adding paragraph (e) to read as follows:

**§ 1068.301 General provisions for importing engines/equipment.**

\* \* \* \* \*

(b) In general, engines/equipment that you import must be covered by a certificate of conformity unless they were built before emission standards started to apply. This subpart describes the limited cases where we allow importation of exempt or excluded engines/equipment. If an engine has an exemption from exhaust emission

standards, this allows you to import the equipment under the same exemption.

\* \* \* \* \*

(d) Complete the appropriate EPA declaration before importing any engines or equipment. These forms may be submitted and stored electronically and are available on the Internet at <http://www.epa.gov/OTAQ/imports/> or by phone at 734-214-4100. Importers must keep these records for five years and make them available promptly upon request.

(e) The standard-setting part may define uncertified engines/equipment to be “new” upon importation, whether or not they have already been placed into service. This may affect how the provisions of this subpart apply for your engines/equipment. (See the definition of “new” and other relevant terms in the standard-setting part.)

■ 259. Section 1068.305 is amended by revising paragraphs (b)(1) and (2) to read as follows:

**§ 1068.305 How do I get an exemption or exclusion for imported engines/equipment?**

\* \* \* \* \*

(b) \* \* \*

(1) Give your name, address, and telephone number.

(2) Give the engine/equipment owner's name, address, and telephone number.

\* \* \* \* \*

■ 260. Section 1068.310 is amended by revising the section heading and paragraph (a) to read as follows:

**§ 1068.310 Exclusions for imported engines/equipment.**

\* \* \* \* \*

(a) *Engines/equipment used solely for competition.* Engines/equipment that you demonstrate will be used solely for competition are excluded from the restrictions on imports in § 1068.301(b), but only if they are properly labeled. See the standard-setting part for provisions related to this demonstration that may apply. Section 1068.101(b)(4) prohibits anyone from using these excluded engines/equipment for purposes other than competition. We may waive the labeling requirement or allow a removable label for engines/equipment that are being temporarily imported for one or more specific competition events.

\* \* \* \* \*

■ 261. Section 1068.315 is amended by revising the section heading and paragraph (i) to read as follows:

**§ 1068.315 Permanent exemptions for imported engines/equipment.**

\* \* \* \* \*

(i) *Ancient engine/equipment exemption.* If you are not the original engine/equipment manufacturer, you may import nonconforming engines/equipment that are subject to a standard-setting part and were first manufactured at least 21 years earlier, as long as they are still substantially in their original configurations.

■ 262. Section 1068.325 is amended by revising the section heading, introductory text, and paragraphs (a), (c), (d), and (j)(5) to read as follows:

**§ 1068.325 Temporary exemptions for imported engines/equipment.**

You may import engines/equipment under certain temporary exemptions, subject to the conditions in this section. We may ask U.S. Customs and Border Protection to require a specific bond amount to make sure you comply with the requirements of this subpart. You may not sell or lease one of these engines/equipment while it is in the United States except as specified in this section or § 1068.201(i). You must eventually export the engine/equipment as we describe in this section unless it conforms to a certificate of conformity or it qualifies for one of the permanent exemptions in § 1068.315 or the standard-setting part.

(a) *Exemption for repairs or alterations.* You may temporarily import nonconforming engines/equipment under bond solely for repair or alteration, subject to our advance approval as described in paragraph (j) of this section. You may operate the engine/equipment in the United States only as necessary to repair it, alter it, or ship it to or from the service location. Export the engine/equipment directly after servicing is complete, or confirm that it has been destroyed.

\* \* \* \* \*

(c) *Display exemption.* You may temporarily import nonconforming engines/equipment under bond for display if you follow the requirements of § 1068.220, subject to our advance approval as described in paragraph (j) of this section. This exemption expires one year after you import the engine/equipment, unless we approve your request for an extension. The engine/equipment must be exported (or destroyed) by the time the exemption expires or directly after the display concludes, whichever comes first.

(d) *Export exemption.* You may temporarily import nonconforming engines/equipment to export them, as described in § 1068.230. Label the engine/equipment as described in § 1068.230. You may sell or lease the engines/equipment for operation

outside the United States consistent with the provisions of § 1068.230.

\* \* \* \* \*

(j) \* \* \*

(5) Acknowledge that EPA enforcement officers may conduct inspections or testing as allowed under the Clean Air Act.

\* \* \* \* \*

■ 263. Section 1068.335 is amended by revising the section heading to read as follows:

**§ 1068.335 Penalties for violations.**

\* \* \* \* \*

■ 264. Section 1068.360 is amended by revising the section heading and paragraph (b) to read as follows:

**§ 1068.360 Restrictions for assigning a model year to imported engines and equipment.**

\* \* \* \* \*

(b) This paragraph (b) applies for the importation of engines and equipment that have not been placed into service, where the importation occurs in any calendar year that is more than one year after the named model year of the engine or equipment when emission control requirements applying to current engines are different than for engines or equipment in the named model year, unless they are imported under special provisions for Independent Commercial Importers as allowed under the standard-setting part. Regardless of what other provisions of this subchapter U specify for the model year of the engine or equipment, such engines and equipment are deemed to have an applicable model year no more than one year earlier than the calendar year in which they are imported. For example, a new engine identified as a 2007 model-year product that is imported on January 31, 2010 will be treated as a 2009 model-year engine; the same engine will be treated as a 2010 model-year engine if it is imported any time in calendar year 2011.

\* \* \* \* \*

**Subpart E—Selective Enforcement Auditing**

■ 265. Section 1068.401 is revised to read as follows:

**§ 1068.401 What is a selective enforcement audit?**

(a) We may conduct or require you as a certificate holder to conduct emission tests on production engines/equipment in a selective enforcement audit. This requirement is independent of any requirement for you to routinely test production-line engines/equipment. Where there are multiple entities meeting the definition of manufacturer,

we may require manufacturers other than the certificate holder to conduct or participate in the audit as necessary. For products subject to equipment-based standards, but tested using engine-based test procedures, this subpart applies to the engines and/or the equipment, as applicable. Otherwise this subpart applies to engines for products subject to engine-based standards and to equipment for products subject to equipment-based standards.

(b) If we send you a signed test order, you must follow its directions and the provisions of this subpart. We may tell you where to test the engines/equipment. This may be where you produce the engines/equipment or any other emission testing facility. You are responsible for all testing costs whether the testing is conducted at your facility or another facility.

(c) If we select one or more of your families for a selective enforcement audit, we will send the test order to the person who signed the application for certification or we will deliver it in person.

(d) If we do not select a testing facility, notify the Designated Compliance Officer within one working day of receiving the test order where you will test your engines/equipment.

(e) You must do everything we require in the audit without delay. We may suspend or revoke your certificate of conformity for the affected engine families if you do not fulfill your obligations under this subpart.

■ 266. Section 1068.405 is amended by revising paragraph (a)(1) to read as follows:

**§ 1068.405 What is in a test order?**

(a) \* \* \*

(1) The family we have identified for testing. We may also specify individual configurations.

\* \* \* \* \*

■ 267. Section 1068.415 is amended by revising paragraphs (c) and (d) to read as follows:

**§ 1068.415 How do I test my engines/equipment?**

\* \* \* \* \*

(c) Test at least two engines/equipment in each 24-hour period (including void tests). However, for engines with maximum engine power above 560 kW, you may test one engine per 24-hour period. If you request and justify it, we may approve a lower testing rate.

(d) For exhaust emissions, accumulate service on test engines/equipment at a minimum rate of 6 hours per engine or piece of equipment during each 24-hour period; however, service accumulation

to stabilize an engine's emission levels may not take longer than eight days. The first 24-hour period for service accumulation begins when you finish preparing an engine or piece of equipment for testing. The minimum service accumulation rate does not apply on weekends or holidays. We may approve a longer stabilization period or a lower service accumulation rate if you request and justify it. We may require you to accumulate hours more rapidly than the minimum rate, as appropriate. Plan your service accumulation to allow testing at the rate specified in paragraph (c) of this section. Select operation for accumulating operating hours on your test engines/equipment to represent normal in-use operation for the family.

\* \* \* \* \*

■ 268. Section 1068.420 is amended by revising paragraphs (b) and (e) to read as follows:

**§ 1068.420 How do I know when my engine family fails an SEA?**

\* \* \* \* \*

(b) Continue testing engines/equipment until you reach a pass decision for all pollutants or a fail decision for one pollutant, as described in paragraph (c) of this section.

\* \* \* \* \*

(e) If you reach a pass decision for one pollutant, but need to continue testing for another pollutant, we will not use these later test results for the pollutant with the pass decision as part of the SEA.

\* \* \* \* \*

■ 269. Section 1068.425 is amended by revising paragraph (b) to read as follows:

**§ 1068.425 What happens if one of my production-line engines/equipment exceeds the emission standards?**

\* \* \* \* \*

(b) You may ask for a hearing relative to the suspended certificate of conformity for the failing engine/equipment as specified in subpart G of this part.

■ 270. Section 1068.430 is amended by revising paragraph (c) to read as follows:

**§ 1068.430 What happens if a family fails an SEA?**

\* \* \* \* \*

(c) You may ask for a hearing as described in subpart G of this part up to 15 days after we suspend the certificate for a family. If we agree that we used erroneous information in deciding to suspend the certificate before a hearing is held, we will reinstate the certificate.

■ 271. Section 1068.450 is amended by revising paragraph (b) to read as follows:

**§ 1068.450 What records must I send to EPA?**

\* \* \* \* \*

(b) We may ask you to add information to your written report, so we can determine whether your new engines/equipment conform to the requirements of this subpart.

\* \* \* \* \*

**Subpart F—Reporting Defects and Recalling Engines/Equipment**

■ 272. Section 1068.501 is amended by revising paragraphs (a)(1)(iv), (a)(8), and (b)(1)(iii) to read as follows:

**§ 1068.501 How do I report emission-related defects?**

\* \* \* \* \*

(a) \* \* \*

(1) \* \* \*

(iv) Any other component whose failure would commonly increase emissions of any regulated pollutant without significantly degrading engine/equipment performance.

\* \* \* \* \*

(8) Send all reports required by this section to the Designated Compliance Officer.

\* \* \* \* \*

(b) \* \* \*

(1) \* \* \*

(iii) You receive any other information for which good engineering judgment would indicate the component or system may be defective, such as information from dealers, field-service personnel, equipment manufacturers, hotline complaints, in-use testing, or engine diagnostic systems.

\* \* \* \* \*

■ 273. Section 1068.505 is amended by revising paragraphs (a), (c), and (g) to read as follows:

**§ 1068.505 How does the recall program work?**

(a) If we make a determination that a substantial number of properly maintained and used engines/equipment do not conform to the regulations of this chapter during their useful life, you must submit a plan to remedy the nonconformity of your engines/equipment. We will notify you of our determination in writing. Our notice will identify the class or category of engines/equipment affected and describe how we reached our conclusion. If this happens, you must meet the requirements and follow the instructions in this subpart. You must remedy at your expense noncompliant engines/equipment that have been properly maintained and used, as described in § 1068.510(a)(7), regardless

of their age or extent of service accumulation at the time of repair. You may not transfer this expense to a dealer (or equipment manufacturer for engine-based standards) through a franchise or other agreement.

\* \* \* \* \*

(c) Unless we withdraw the determination of noncompliance, you must respond to it by sending a remedial plan to the Designated Compliance Officer. We will designate a date by which you must send us the remedial plan; the designated date will be no sooner than 45 days after we notify you, and no sooner than 30 days after a hearing.

\* \* \* \* \*

(g) For purposes of recall, “owner” means someone who owns an engine or piece of equipment affected by a remedial plan.

■ 274. Section 1068.510 is amended by revising paragraph (a)(6) to read as follows:

**§ 1068.510 How do I prepare and apply my remedial plan?**

(a) \* \* \*

(6) How you will notify owners; include a copy of any notification letters.

\* \* \* \* \*

■ 275. Section 1068.515 is amended by revising paragraph (c) to read as follows:

**§ 1068.515 How do I mark or label repaired engines/equipment?**

\* \* \* \* \*

(c) On the label, designate the specific recall campaign and identify the facility where you repaired or inspected the engine/equipment.

\* \* \* \* \*

■ 276. Section 1068.530 is amended by revising the introductory text to read as follows:

**§ 1068.530 What records must I keep?**

We may review your records at any time so it is important that you keep required information readily available. Keep records associated with your recall campaign for five years after you send the last report we require under § 1068.525(b). Organize and maintain your records as described in this section.

\* \* \* \* \*

■ 277. Subpart G is revised to read as follows:

**Subpart G—Hearings**

Sec.

1068.601 Overview.

1068.610 Request for hearing—suspending, revoking, or voiding a certificate of conformity.

1068.615 Request for hearing—denied application for certification,

automatically suspended certificate, and determinations related to certification.

1068.620 Request for hearing—recall.

1068.625 Request for hearing—nonconformance penalties.

1068.650 Procedures for informal hearings.

**Subpart G—Hearings****§ 1068.601 Overview.**

The regulations of this chapter involve numerous provisions that may result in EPA making a decision or judgment that you may consider adverse to your interests and that either limits your business activities or requires you to pay penalties. As specified in the regulations, this might involve an opportunity for an informal hearing or a formal hearing that follows specific procedures and is directed by a Presiding Officer. The regulations generally specify when we would hold a hearing. In limited circumstances, we may grant a request for a hearing related to adverse decisions regarding regulatory provisions for which we do not specifically describe the possibility of asking for a hearing.

(a) If you request a hearing regarding our decision to assess administrative penalties under § 1068.125, we will hold a formal hearing according to the provisions of 40 CFR 22.1 through 22.32 and 22.34.

(b) For other issues where the regulation allows for a hearing in response to an adverse decision, you may request an informal hearing as described in § 1068.650. Sections 1068.610 through 1068.625 describe when and how to request an informal hearing under various circumstances.

(c) The time limits we specify are calendar days and include weekends and holidays, except that a deadline falling on a Saturday, Sunday, or a federal holiday is understood to move to the next business day. Your filing will be considered timely based on the following criteria relative to the specified deadline:

(1) The postmarked date for items sent by U.S. mail must be on or before the specified date.

(2) The ship date for items sent from any location within the United States by commercial carriers must be on or before the specified date.

(3) Items sent by mail or courier from outside the United States must be received by the specified date.

(4) The time and date stamp on an email message must be at or before 5:00 p.m. on the specified date.

(5) The time and date stamp on faxed pages must be at or before 5:00 p.m. on the specified date.

(6) Hand-delivered items must be received by the appropriate personnel by 3:00 p.m. on the specified date.

(d) See the standard-setting part for additional information. If the standard-setting part specifies any provisions that are contrary to those described in this subpart, the provisions of the standard-setting part apply instead of those described in this subpart.

**§ 1068.610 Request for hearing—suspending, revoking, or voiding a certificate of conformity.**

(a) You may request an informal hearing as described in § 1068.650 if you disagree with our decision to suspend, revoke, or void a certificate of conformity. We will approve your request for an informal hearing under this paragraph (a) if we find that your request raises a substantial factual issue in the decision we made that, if addressed differently, could alter the outcome of that decision.

(b) If you request a hearing regarding the outcome of a testing regimen with established evaluation criteria, such as selective enforcement audits or routine production-line testing, we will hold a hearing limited to the following issues that are relevant to your circumstances:

(1) Whether tests were conducted in accordance with applicable regulations.

(2) Whether test equipment was properly calibrated and functioning.

(3) Whether specified sampling procedures were followed to select engines/equipment for testing.

(4) Whether there is a basis for determining that the problems identified do not apply for engines/equipment produced at plants other than the one from which engines/equipment were selected for testing.

(c) You must send your hearing request in writing to the Designated Compliance Officer no later than 30 days after we notify you of our decision to suspend, revoke, or void your certificate, or by some later deadline we specify. If the deadline passes, we may nevertheless grant you a hearing at our discretion.

(d) Your hearing request must include the following information:

(1) Identify the classes or categories of engines/equipment that will be the subject of the hearing.

(2) State briefly which issues you will raise at the hearing for each affected class or category of engines/equipment.

(3) Specify why you believe the hearing will conclude in your favor for each of the issues you will raise.

(4) Summarize the evidence supporting your position on each of the issues you will raise and include any supporting data.

**§ 1068.615 Request for hearing—denied application for certification, automatically suspended certificate, and determinations related to certification.**

(a) You may request an informal hearing as described in § 1068.650 if we deny your application for a certificate of conformity, if your certificate of conformity is automatically suspended under the regulations, or if you disagree with determinations we make as part of the certification process. For example, you might disagree with our determinations regarding adjustable parameters under § 1068.50 or regarding your good engineering judgment under § 1068.5.

(b) You must send your hearing request in writing to the Designated Compliance Officer no later than 30 days after we notify you of our decision, or by some later deadline we specify. If the specified deadline passes, we may nevertheless grant you a hearing at our discretion.

(c) Your hearing request must include the information specified in § 1068.610(d).

(d) We will approve your request for an informal hearing if we find that your request raises a substantial factual issue in the decision we made that, if addressed differently, could alter the outcome of that decision.

**§ 1068.620 Request for hearing—recall.**

(a) You may request an informal hearing as described in § 1068.650 if you disagree with our decision to order a recall.

(b) You must send your hearing request in writing to the Designated Compliance Officer no later than 45 days after we notify you of our decision, or by some later deadline we specify. If the specified deadline passes, we may nevertheless grant you a hearing at our discretion.

(c) Your hearing request must include the information specified in § 1068.610(d).

**§ 1068.625 Request for hearing—nonconformance penalties.**

(a) You may request an informal hearing as described in § 1068.650 if you disagree with our determination of compliance level or penalty calculation or both. The hearing will address only whether the compliance level or penalty was determined in accordance with the regulations.

(b) Send a request for a hearing in writing to the Designated Compliance Officer within the following time frame, as applicable:

(1) No later than 15 days after we notify you that we have approved a nonconformance penalty under this

subpart if the compliance level is in the allowable range of nonconformity.

(2) No later than 15 days after completion of the Production Compliance Audit if the compliance level exceeds the upper limit.

(3) No later than 15 days after we notify you of an adverse decision for all other cases.

(c) If you miss the specified deadline in paragraph (b) of this section, we may nevertheless grant you a hearing at our discretion.

(d) Your hearing request must include the information specified in § 1068.610(d).

(e) We will approve your request for an informal hearing if we find that your request raises a substantial factual issue in the decision we made that, if addressed differently, could alter the outcome of that decision.

**§ 1068.650 Procedures for informal hearings.**

(a) The following provisions apply for arranging the hearing:

(1) After granting your request for an informal hearing, we will designate a Presiding Officer for the hearing.

(2) The Presiding Officer will select the time and place for the hearing. The hearing must be held as soon as practicable for all parties involved.

(3) The Presiding Officer may require that all argument and presentation of evidence be concluded by a certain date after commencement of the hearing.

(b) The Presiding Officer will establish a paper or electronic hearing record, which may be made available for inspection. The hearing record includes, but is not limited to, the following materials:

(1) All documents relating to the application for certification, including the certificate of conformity itself, if applicable.

(2) Your request for a hearing and the accompanying supporting data.

(3) Correspondence and other data relevant to the hearing.

(4) The Presiding Officer's written decision regarding the subject of the hearing, together with any accompanying material.

(c) You may appear in person or you may be represented by counsel or by any other representative you designate.

(d) The Presiding Officer may arrange for a prehearing conference, either in response to a request from any party or at his or her own discretion. The Presiding Officer will select the time and place for the prehearing conference. The Presiding Officer will summarize the results of the conference and include the written summary as part of the record. The prehearing conference

may involve consideration of the following items:

- (1) Simplification of the issues.
- (2) Stipulations, admissions of fact, and the introduction of documents.
- (3) Limitation of the number of expert witnesses.
- (4) Possibility of reaching an agreement to resolve any or all of the issues in dispute.
- (5) Any other matters that may aid in expeditiously and successfully concluding the hearing.

(e) Hearings will be conducted as follows:

(1) The Presiding Officer will conduct informal hearings in an orderly and expeditious manner. The parties may offer oral or written evidence; however, the Presiding Officer may exclude evidence that is irrelevant, immaterial, or repetitious.

(2) Witnesses will not be required to testify under oath; however, the Presiding Officer must make clear that 18 U.S.C. 1001 specifies civil and criminal penalties for knowingly making false statements or representations or using false documents in any matter within the jurisdiction of EPA or any other department or agency of the United States.

(3) Any witness may be examined or cross-examined by the Presiding Officer, by you, or by any other parties.

(4) Written transcripts must be made for all hearings. Anyone may purchase copies of transcripts from the reporter.

(f) The Presiding Officer will make a final decision with written findings, conclusions and supporting rationale on all the substantial factual issues presented in the record. The findings, conclusions, and written decision must be provided to the parties and made a part of the record.

■ 278. Appendix I to part 1068 is amended by revising paragraph IV to read as follows:

#### APPENDIX I TO PART 1068—EMISSION-RELATED COMPONENTS

\* \* \* \* \*

IV. Emission-related components also include any other part whose primary purpose is to reduce emissions or whose failure would commonly increase emissions without significantly degrading engine/equipment performance.

#### Department of Transportation

##### National Highway Traffic Safety Administration

#### 49 CFR Chapter V

In consideration of the foregoing, under the authority of 49 U.S.C. 322, 5

U.S.C. 552, 49 U.S.C. 30166, 49 U.S.C. 30167, 49 U.S.C. 32307, 49 U.S.C. 32505, 49 U.S.C. 32708, 49 U.S.C. 32910, 49 U.S.C. 33116, 49 U.S.C. 32901, 49 U.S.C. 32902, 49 U.S.C. 30101, 49 U.S.C. 32905, 49 U.S.C. 32906, and delegation of authority at 49 CFR 1.95, NHTSA amends 49 CFR chapter V as follows:

#### PART 512—CONFIDENTIAL BUSINESS INFORMATION

■ 279. Revise the authority citation for part 512 to read as follows:

**Authority:** 49 U.S.C. 322; 5 U.S.C. 552; 49 U.S.C. 30166; 49 U.S.C. 30167; 49 U.S.C. 32307; 49 U.S.C. 32505; 49 U.S.C. 32708; 49 U.S.C. 32910; 49 U.S.C. 33116; delegation of authority at 49 CFR 1.95.

■ 280. Amend § 512.6 by revising paragraph (c)(2) to read as follows:

#### § 512.6 How should I prepare documents when submitting a claim for confidentiality?

\* \* \* \* \*

(c) \* \* \*

(2) Confidential portions of electronic files submitted in other than their original format must be marked “Confidential Business Information” or “Entire Page Confidential Business Information” at the top of each page. If only a portion of a page is claimed to be confidential, that portion shall be designated by brackets. Files submitted in their original format that cannot be marked as described above must, to the extent practicable, identify confidential information by alternative markings using existing attributes within the file or means that are accessible through use of the file’s associated program. When alternative markings are used, such as font changes or symbols, the submitter must use one method consistently for electronic files of the same type within the same submission. The method used for such markings must be described in the request for confidentiality. Files and materials that cannot be marked internally, such as video clips or executable files or files provided in a format specifically requested by the agency, shall be renamed prior to submission so the words “Confidential Bus Info” appears in the file name or, if that is not practicable, the characters “Conf Bus Info” or “CBI” appear. In all cases, a submitter shall provide an electronic copy of its request for confidential treatment on any medium containing confidential information, except where impracticable.

\* \* \* \* \*

■ 281. Revise § 512.7 to read as follows:

#### § 512.7 Where should I send the information for which I am requesting confidentiality?

Except for requests pertaining to information submitted under 49 CFR part 537, any claim for confidential treatment must be submitted to the Chief Counsel of the National Highway Traffic Safety Administration, 1200 New Jersey Avenue SE., West Building W41–227, Washington, DC 20590. Requests for confidential treatment for information submitted under 49 CFR part 537 shall accompany the submission and be provided to NHTSA through the electronic portal identified in 49 CFR 537.5(a)(4) or through an email address that will be provided and maintained by NHTSA.

#### PART 523—VEHICLE CLASSIFICATION

■ 282. Revise the authority citation for part 523 to read as follows:

**Authority:** 49 U.S.C. 32901; delegation of authority at 49 CFR 1.95.

■ 283. Revise § 523.2 to read as follows:

#### § 523.2 Definitions.

*Ambulance* has the meaning given in 40 CFR 86.1803.

*Approach angle* means the smallest angle, in a plane side view of an automobile, formed by the level surface on which the automobile is standing and a line tangent to the front tire static loaded radius arc and touching the underside of the automobile forward of the front tire.

*Axle clearance* means the vertical distance from the level surface on which an automobile is standing to the lowest point on the axle differential of the automobile.

*Base tire (for passenger automobiles, light trucks, and medium duty passenger vehicles)* means the tire size specified as standard equipment by the manufacturer on each unique combination of a vehicle’s footprint and model type. Standard equipment is defined in 40 CFR 86.1803.

*Basic vehicle frontal area* is used as defined in 40 CFR 86.1803 for passenger automobiles, light trucks, medium duty passenger vehicles and Class 2b through 3 pickup trucks and vans. For heavy-duty tracts and vocational vehicles, it has the meaning given in 40 CFR 1037.801.

*Breakover angle* means the supplement of the largest angle, in the plan side view of an automobile that can be formed by two lines tangent to the front and rear static loaded radii arcs and intersecting at a point on the underside of the automobile.

*Cab-complete vehicle* means a vehicle that is first sold as an incomplete

vehicle that substantially includes the vehicle cab section as defined in 40 CFR 1037.801. For example, vehicles known commercially as chassis-cabs, cab-chassis, box-deletes, bed-deletes, and cut-away vans are considered cab-complete vehicles. A cab includes a steering column and a passenger compartment. Note that a vehicle lacking some components of the cab is a cab-complete vehicle if it substantially includes the cab.

*Cargo-carrying volume* means the luggage capacity or cargo volume index, as appropriate, and as those terms are defined in 40 CFR 600.315–08, in the case of automobiles to which either of these terms apply. With respect to automobiles to which neither of these terms apply, “cargo-carrying volume” means the total volume in cubic feet, rounded to the nearest 0.1 cubic feet, of either an automobile’s enclosed nonseating space that is intended primarily for carrying cargo and is not accessible from the passenger compartment, or the space intended primarily for carrying cargo bounded in the front by a vertical plane that is perpendicular to the longitudinal centerline of the automobile and passes through the rearmost point on the rearmost seat and elsewhere by the automobile’s interior surfaces.

*Class 2b vehicles* are vehicles with a gross vehicle weight rating (GVWR) ranging from 8,501 to 10,000 pounds.

*Class 3 through Class 8 vehicles* are vehicles with a gross vehicle weight rating (GVWR) of 10,001 pounds or more as defined in 49 CFR 565.15.

*Commercial medium- and heavy-duty on-highway vehicle* means an on-highway vehicle with a gross vehicle weight rating of 10,000 pounds or more as defined in 49 U.S.C. 32901(a)(7).

*Complete vehicle* has the meaning given to *completed vehicle* as defined in 49 CFR 567.3.

*Curb weight* has the meaning given in 49 CFR 571.3.

*Dedicated vehicle* has the same meaning as dedicated automobile as defined in 49 U.S.C. 32901(a)(8).

*Departure angle* means the smallest angle, in a plane side view of an automobile, formed by the level surface on which the automobile is standing and a line tangent to the rear tire static loaded radius arc and touching the underside of the automobile rearward of the rear tire.

*Dual-fueled vehicle (multi-fuel, or flexible-fuel vehicle)* has the same meaning as dual fueled automobile as defined in 49 U.S.C. 32901(a)(9).

*Electric vehicle* means a vehicle that does not include an engine, and is powered solely by an external source of

electricity and/or solar power. Note that this does not include electric hybrid or fuel-cell vehicles that use a chemical fuel such as gasoline, diesel fuel, or hydrogen. Electric vehicles may also be referred to as all-electric vehicles to distinguish them from hybrid vehicles.

*Emergency vehicle* means one of the following:

(1) For passenger cars, light trucks and medium duty passenger vehicles, emergency vehicle has the meaning in 49 U.S.C. 32902(e).

(2) For heavy-duty vehicles, emergency vehicle has the meaning given in 40 CFR 1037.801.

*Engine code* has the meaning given in 40 CFR 86.1803.

*Final stage manufacturer* has the meaning given in 49 CFR 567.3.

*Fire truck* has the meaning given in 40 CFR 86.1803.

*Footprint* is defined as the product of track width (measured in inches, calculated as the average of front and rear track widths, and rounded to the nearest tenth of an inch) times wheelbase (measured in inches and rounded to the nearest tenth of an inch), divided by 144 and then rounded to the nearest tenth of a square foot. For purposes of this definition, track width is the lateral distance between the centerlines of the base tires at ground, including the camber angle. For purposes of this definition, wheelbase is the longitudinal distance between front and rear wheel centerlines.

*Full-size pickup truck* means a light truck or medium duty passenger vehicle that meets the requirements specified in 40 CFR 86.1866–12(e).

*Gross axle weight rating (GAWR)* has the meaning given in 49 CFR 571.3.

*Gross combination weight rating (GCWR)* has the meaning given in 49 CFR 571.3.

*Gross vehicle weight rating (GVWR)* has the meaning given in 49 CFR 571.3.

*Heavy-duty engine* means any engine used for (or for which the engine manufacturer could reasonably expect to be used for) motive power in a heavy-duty vehicle. For purposes of this definition in this part, the term “engine” includes internal combustion engines and other devices that convert chemical fuel into motive power. For example, a fuel cell and motor used in a heavy-duty vehicle is a heavy-duty engine.

*Heavy-duty vehicle* means a vehicle as defined in § 523.6.

*Incomplete vehicle* has the meaning given in 49 CFR 567.3.

*Innovative technology* means technology certified under 40 CFR 1036.610, 40 CFR 1037.610 and 49 CFR 535.7(f).

*Light truck* means a non-passenger automobile meeting the criteria in § 523.5.

*Manufacturer* has the meaning in 49 U.S.C. 30102.

*Medium duty passenger vehicle* means a vehicle which would satisfy the criteria in § 523.5 (relating to light trucks) but for its gross vehicle weight rating or its curb weight, which is rated at more than 8,500 lbs GVWR or has a vehicle curb weight of more than 6,000 pounds or has a basic vehicle frontal area in excess of 45 square feet, and which is designed primarily to transport passengers, but does not include a vehicle that—

(1) Is an “incomplete vehicle” as defined in this subpart; or

(2) Has a seating capacity of more than 12 persons; or

(3) Is designed for more than 9 persons in seating rearward of the driver’s seat; or

(4) Is equipped with an open cargo area (for example, a pick-up truck box or bed) of 72.0 inches in interior length or more. A covered box not readily accessible from the passenger compartment will be considered an open cargo area for purposes of this definition.

*Mild hybrid gasoline-electric vehicle* means a vehicle as defined by EPA in 40 CFR 86.1866–12(e).

*Motor home* has the meaning given in 49 CFR 571.3.

*Motor vehicle* has the meaning giving in 49 U.S.C. 30102.

*Off-cycle technology* means technology certified under 40 CFR 1036.610, 40 CFR 1037.610 and 49 CFR 535.7(f).

*Passenger-carrying volume* means the sum of the front seat volume and, if any, rear seat volume, as defined in 40 CFR 600.315–08, in the case of automobiles to which that term applies. With respect to automobiles to which that term does not apply, “passenger-carrying volume” means the sum in cubic feet, rounded to the nearest 0.1 cubic feet, of the volume of a vehicle’s front seat and seats to the rear of the front seat, as applicable, calculated as follows with the head room, shoulder room, and leg room dimensions determined in accordance with the procedures outlined in Society of Automotive Engineers Recommended Practice J1100, Motor Vehicle Dimensions (Report of Human Factors Engineering Committee, Society of Automotive Engineers, approved November 2009).

(1) For front seat volume, divide 1,728 into the product of the following SAE dimensions, measured in inches to the nearest 0.1 inches, and round the quotient to the nearest 0.001 cubic feet.

- (i) H61-Effective head room—front.
- (ii) W3-Shoulder room—front.
- (iii) L34-Maximum effective leg room—accelerator.

(2) For the volume of seats to the rear of the front seat, divide 1,728 into the product of the following SAE dimensions, measured in inches to the nearest 0.1 inches, and rounded the quotient to the nearest 0.001 cubic feet.

- (i) H63-Effective head room—second.
- (ii) W4-Shoulder room—second.
- (iii) L51-Minimum effective leg room—second.

*Phase 1* means the greenhouse gas emissions standards and fuel efficiency standards for medium- and heavy-duty engines and vehicles program published in 2011, effective beginning with model year 2013.

*Phase 2* means means the greenhouse gas emissions standards and fuel efficiency standards for medium- and heavy-duty engines and vehicles program effective beginning with model year 2018 for heavy-duty trailers and model year 2021 for all other heavy-duty vehicles and engines.

*Pickup truck* means a non-passenger automobile which has a passenger compartment and an open cargo area (bed).

*Recreational vehicle or RV* means a motor vehicle equipped with living space and amenities found in a motor home.

*Running clearance* means the distance from the surface on which an automobile is standing to the lowest point on the automobile, excluding unsprung weight.

*Static loaded radius arc* means a portion of a circle whose center is the center of a standard tire-rim combination of an automobile and whose radius is the distance from that center to the level surface on which the automobile is standing, measured with the automobile at curb weight, the wheel parallel to the vehicle's longitudinal centerline, and the tire inflated to the manufacturer's recommended pressure.

*Strong hybrid gasoline-electric vehicle* means a vehicle as defined by EPA in 40 CFR 86.1866–12(e).

*Temporary living quarters* means a space in the interior of an automobile in which people may temporarily live and which includes sleeping surfaces, such as beds, and household conveniences, such as a sink, stove, refrigerator, or toilet.

*Transmission class* has the meaning given in 40 CFR 600.002.

*Transmission configuration* has the meaning given in 40 CFR 600.002.

*Transmission type* has the meaning given in 40 CFR 86.1803.

*Van* means a vehicle with a body that fully encloses the driver and a cargo carrying or work performing compartment. The distance from the leading edge of the windshield to the foremost body section of vans is typically shorter than that of pickup trucks and sport utility vehicles.

*Vocational tractor* means a tractor that is classified as a vocational vehicle according to 40 CFR 1037.630

*Vocational vehicle* means a vehicle that is equipped for a particular industry, trade or occupation such as construction, heavy hauling, mining, logging, oil fields, refuse and includes vehicles such as school buses, motorcoaches and RVs.

*Work truck* means a vehicle that is rated at more than 8,500 pounds and less than or equal to 10,000 pounds gross vehicle weight, and is not a medium-duty passenger vehicle as defined in 40 CFR 86.1803.

■ 284. Revise § 523.6 to read as follows:

#### § 523.6 Heavy-duty vehicle.

(a) A heavy-duty vehicle is any commercial medium or heavy-duty on-highway vehicle or a work truck, as defined in 49 U.S.C. 32901(a)(7) and (19). For the purpose of this section, heavy-duty vehicles are divided into four regulatory categories as follows:

- (1) Heavy-duty pickup trucks and vans;
- (2) Heavy-duty vocational vehicles;
- (3) Truck tractors with a GVWR above 26,000 pounds; and
- (4) Heavy-duty trailers.

(b) The heavy-duty vehicle classification does not include vehicles excluded as specified in 49 CFR 535.3.

■ 285. Revise § 523.7 to read as follows:

#### § 523.7 Heavy-duty pickup trucks and vans.

Heavy-duty pickup trucks and vans are pickup trucks and vans with a gross vehicle weight rating between 8,501 pounds and 14,000 pounds (Class 2b through 3 vehicles) manufactured as complete vehicles by a single or final stage manufacturer or manufactured as incomplete vehicles as designated by a manufacturer. A manufacturer may also optionally designate as a heavy-duty pickup truck or van any cab-complete or complete vehicle having a GVWR over 14,000 pounds and below 26,001 pounds equipped with a spark ignition engine or any spark ignition engine certified and sold as a loose engine manufactured for use in a heavy-duty pickup truck or van. See references in 40 CFR 86.1819, 40 CFR 1037.150, and 49 CFR 535.5(a).

■ 286. Add § 523.10 to read as follows:

#### § 523.10 Heavy-duty trailers.

(a) A trailer means a motor vehicle with or without motive power, designed for carrying persons or property and for being drawn by another motor vehicle as defined in 49 CFR 571.3. For the purpose of this part, heavy-duty trailers include only those trailers designed to be drawn by a truck tractor or vocational tractor. Heavy-duty trailers may be divided into different types and categories as follows:

(1) Box vans are trailers with an enclosed cargo space that is permanently attached to the chassis, with fixed sides, nose, and roof and is designed to carry a wide range of freight. Tankers are not box vans.

(2) Box vans with self-contained refrigeration systems are refrigerated vans. All other box vans are dry vans.

(3) Trailers that are not box vans are non-box trailers. This includes chassis that are designed only for temporarily mounted containers.

(4) Box trailers with length greater than 50 feet are long box trailers. Other box trailers are short box trailers.

(b) Heavy-duty trailers does not include excluded trailers as specified in 49 CFR 535.3.

### PART 534—RIGHTS AND RESPONSIBILITIES OF MANUFACTURERS IN THE CONTEXT OF CHANGES IN CORPORATE RELATIONSHIPS

■ 287. Revise the authority citation for part 534 to read as follows:

**Authority:** 49 U.S.C. 32901; delegation of authority at 49 CFR 1.95.

■ 288. Add § 534.8 to read as follows:

#### § 534.8 Shared corporate relationships.

(a) Vehicles and engines built by multiple manufacturers can share responsibility for complying with fuel consumption standards in 49 CFR part 535, if allowed by EPA under 40 CFR 1037.620 and a joint agreement between the parties is sent to EPA and NHTSA.

(1) Each agreement must—

(i) Define how the vehicles and engines will be divided among each manufacturer;

(ii) Specify which manufacturer(s) will be responsible for the EPA certificates of conformity required in 40 CFR 1036.201 and 40 CFR 1037.201;

(iii) Describe the vehicles and engines in terms of the model types, production volumes, and model years (production periods if necessary);

(iv) Describe which manufacturer(s) have engineering and design control and sale distribution ownership over the vehicles and/or engines; and



(v) Include signatures from all parties involved in the shared corporate relationship.

(2) After defining the shared relationship between the manufacturers for the initiating model year, manufacturers cannot change the defined ownerships for subsequent model years unless one manufacturer assumes a successor relationship over another manufacturer that previously shared ownership.

(3) Multiple manufacturers must designate the same shared responsibility for complying with fuel consumption as selected for GHG standards unless otherwise allowed by EPA and NHTSA.

(b) NHTSA reserves the right to reject the joint agreement.

■ 289. Revise part 535 to read as follows:

## **PART 535 MEDIUM- AND HEAVY-DUTY VEHICLE FUEL EFFICIENCY PROGRAM**

Sec.

535.1 Scope.

535.2 Purpose.

535.3 Applicability.

535.4 Definitions.

535.5 Standards.

535.6 Measurement and calculation procedures.

535.7 Averaging, banking, and trading (ABT) credit program.

535.8 Reporting requirements and recordkeeping requirements.

535.9 Enforcement approach.

535.10 How do manufacturers comply with fuel consumption standards?

**Authority:** 49 U.S.C. 32902 and 30101; delegation of authority at 49 CFR 1.95.

### **§ 535.1 Scope.**

This part establishes fuel consumption standards pursuant to 49 U.S.C. 32902(k) for work trucks and commercial medium-duty and heavy-duty on-highway vehicles, including trailers (hereafter referenced as heavy-duty vehicles), and engines manufactured for sale in the United States and establishes a credit program manufacturers may use to comply with standards and requirements for manufacturers to provide reports to the National Highway Traffic Safety Administration regarding their efforts to reduce the fuel consumption of heavy-duty vehicles.

### **§ 535.2 Purpose.**

The purpose of this part is to reduce the fuel consumption of new heavy-duty vehicles by establishing maximum levels for fuel consumption standards while providing a flexible credit program to assist manufacturers in complying with standards.

### **§ 535.3 Applicability.**

(a) This part applies to manufacturers that produce complete and incomplete heavy-duty vehicles as defined in 49 CFR part 523, and to the manufacturers of all heavy-duty engines manufactured for use in the applicable vehicles for each given model year.

(b) Vehicle and engine manufacturers that must comply with this part include manufacturers required to have approved certificates of conformity from EPA as specified in 40 CFR parts 86, 1036, and 1037, except for minor differences in excluded vehicles as specified in paragraph (d) of this section.

(c) In certain special conditions where EPA allows manufacturers to designate other manufacturers to comply with GHG standards or grants special allowances in the construction of vehicles, as specified in 40 CFR 1037.620, 1037.621, and 1037.650, these allowances can be used to comply with the fuel consumption standards of this part.

(d) Manufacturers required to meet the fuel consumption standards of this part also include manufacturers completing, altering, or assembling motor vehicles or motor vehicle equipment into—

(1) Electric vehicles; and

(2) Alternative fueled vehicles from all types of heavy duty engine conversions.

(i) Entities that install alternative fuel conversion systems into vehicles acquired from vehicle manufacturers prior to first retail sale or introduction into interstate commerce may be regulated under this part if designated by the vehicle manufacturer and EPA to be the certificate holder.

(ii) Entities installing alternative fuel conversions are regulated as vehicle and engine manufacturers.

(iii) Entities can be omitted from compliance with vehicle based standards, if—

(A) Allowed by EPA;

(B) They provide a reasonable technical basis that the modified vehicle continues to meet vehicle standards; and

(C) They provide a joint agreement to EPA and NHTSA as specified in 49 CFR 534.7.

(e) The following heavy-duty vehicles and engines are excluded from the requirements of this part:

(1) Medium-duty passenger vehicles and other vehicles subject to the light-duty corporate average fuel economy standards in 49 CFR parts 531 and 533.

(2) Recreational vehicles, including motor homes manufactured before model year 2021 except those produced

by manufacturers voluntarily complying with NHTSA's early vocational standards for model years 2013 through 2020.

(3) Heavy-duty trailers meeting one or more of the following criteria are excluded from vehicle standards in § 535.5(e):

(i) Trailers designed for in-field operations in logging or mining.

(ii) Trailers designed to operate at low speeds such that they are unsuitable for normal highway operation.

(iii) Trailers designed to perform their primary function while stationary, if they have permanently affixed components designed for heavy construction. This would include crane trailers and concrete trailers. Trailers would not qualify under this paragraph based on welding equipment or other components that are commonly used separate from trailers.

(iv) Trailers less than 35 feet long with three axles, and all trailers with four or more axles.

(v) Trailers intended for temporary or permanent residence, office space, or other work space, such as campers, mobile homes, and carnival trailers.

(vi) Trailers built before January 1, 2021, except those trailers voluntarily complying with NHTSA's early trailer standards for model years 2018–2020.

(vii) Equipment that serves similar purposes to trailers but is not intended to be pulled by a tractor.

(viii) Containers that are not permanently mounted on chassis.

(ix) Trailers designed to be drawn by vehicles other than tractors, and those that are coupled to vehicles with pintle hooks or hitches instead of a fifth wheel.

(f) The following heavy-duty vehicles and engines are exempted from the requirements of this part:

(1) *Off-road vehicles.* Manufacturers producing heavy-duty vocational vehicles or vocational tractors that are intended for off-road use meeting the criteria of paragraph (f)(1)(i) of this section are exempted from vehicle standards in § 535.5(b) and (c) but must comply with engine standards in § 535.5(d).

(i) Vehicles primarily designed to perform work off-road (such as in oil fields, mining, forests, or construction sites), and meeting at least one of the criteria of paragraph (f)(1)(i)(A) of this section and at least one of the criteria of paragraph (f)(1)(i)(B) of this section.

(A) Vehicle must have affixed components designed to work in an off-road environment (for example, hazardous material equipment or drilling equipment) or was designed to operate at low speeds making them unsuitable for normal highway operation.



(B) Vehicles must—

(1) Have an axle that has a gross axle weight rating (GAWR) of 29,000 pounds or more;

(2) Have a speed attainable in 2 miles of not more than 33 mph; or

(3) Have a speed attainable in 2 miles of not more than 45 mph, an unloaded vehicle weight that is not less than 95 percent of its gross vehicle weight rating (GVWR), and no capacity to carry occupants other than the driver and operating crew.

(C) Manufacturers building tractors exempted under this provision must request preliminary approval before introducing vehicles into commerce. The request with supporting information must be sent to EPA that will coordinate with NHTSA in making a determination in accordance with 40 CFR 1037.210. Vehicles introduced into U.S. commerce without approval under this paragraph violate 40 CFR 1068.101(a)(1).

(ii) [Reserved]

(2) *Small business manufacturers.* (i) For Phase 1, small business manufacturers are exempted from the vehicle and engine standards of § 535.5, but must comply with the reporting requirements of § 535.8(g).

(ii) For Phase 2, fuel consumption standards apply on a delayed schedule for manufacturers meeting the small business criteria specified in 13 CFR 121.201 and in 40 CFR 86.1819–14(k)(5), 40 CFR 1036.150, and 40 CFR 1037.150. Qualifying manufacturers of truck tractors, vocational vehicles, heavy duty pickups and vans, and engines are not subject to the fuel consumption standards for vehicles and engines built before January 1, 2022. Qualifying manufacturers may choose to voluntarily comply early.

(iii) Small business manufacturers producing vehicles and engines that run on any fuel other than gasoline, E85, or diesel fuel meeting the criteria specified in 13 CFR 121.201 and in 40 CFR 86.1819–14(k)(5), 40 CFR 1036.150, and 40 CFR 1037.150 may delay complying with every new mandatory standard under this part by one model year.

(g) For model year 2021 and later, emergency vehicles may comply with alternative fuel consumption standards as specified in § 535.5(b)(5) instead of the standards specified in § 535.5(b)(4). Vehicles certified to these alternative standards may not generate or use positive fuel consumption credits but negative credits must be averaged within an averaging set.

(h) NHTSA may exclude or exempt vehicles and engines under special conditions allowed by EPA in accordance with 40 CFR parts 85, 86,

1036, 1037, and 1068. Manufacturers should consult the agencies if uncertain how to apply any EPA provision under the NHTSA fuel consumption program. Upon notification by EPA of a fraudulent use of an exemption, NHTSA reserves that right to suspend or revoke any exemption or exclusion.

#### § 535.4 Definitions.

The terms manufacture and manufacturer are used as defined in section 501 of the Act and the terms commercial medium-duty and heavy-duty on highway vehicle, fuel and work truck are used as defined in 49 U.S.C. 32901.

*Act* means the Motor Vehicle Information and Cost Savings Act, as amended by Pub. L. 94–163 and 96–425.

*Administrator* means the Administrator of the National Highway Traffic Safety Administration (NHTSA) or the Administrator's delegate.

*Advanced technology* means vehicle technology under this fuel consumption program in §§ 535.6 and 535.7 and by EPA under 40 CFR 86.1819–14(d)(7), 1036.615, or 1037.615.

*Alternative fuel conversion* has the meaning given for clean alternative fuel conversion in 40 CFR 85.502.

*A to B testing* has the meaning given in 40 CFR 1037.801.

*Automatic tire inflation system* has the meaning in 40 CFR 1037.801.

*Averaging set* means, a set of engines or vehicles in which fuel consumption credits may be exchanged. Credits generated by one engine or vehicle family may only be used by other respective engine or vehicle families in the same averaging set. Note that an averaging set may comprise more than one regulatory subcategory. The averaging sets for this HD program are defined as follows:

(1) Heavy-duty pickup trucks and vans.

(2) Vocational light-heavy vehicles with a GVWR above 8,500 pounds but at or below 19,500 pounds.

(3) Vocational and tractor medium-heavy vehicles with a GVWR above 19,500 pounds but at or below 33,000 pounds.

(4) Vocational and tractor heavy-heavy vehicles with a GVWR above 33,000 pounds.

(5) Compression-ignition light heavy-duty engines for Class 2b to 5 vehicles with a GVWR above 8,500 pounds but at or below 19,500 pounds.

(6) Compression-ignition medium heavy-duty engines for Class 6 and 7 vehicles with a GVWR above 19,500 but at or below 33,000 pounds.

(7) Compression-ignition heavy heavy-duty engines for Class 8 vehicles with a GVWR above 33,000 pounds.

(8) Spark-ignition engines in Class 2b to 8 vehicles with a GVWR above 8,500 pounds.

(9) Long box van trailers.

(10) Short box van trailers.

(11) Long refrigerated box van trailers.

(12) Short refrigerated box van trailers.

*Cab-complete vehicle* has the meaning given in 49 CFR part 523.

*Carryover* means relating to certification based on emission data generated from an earlier model year.

*Certificate holder* means the manufacturer who holds the certificate of conformity for the vehicle or engine and that assigns the model year based on the date when its manufacturing operations are completed relative to its annual model year period.

*Certificate of Conformity* means an approval document granted by EPA to a manufacturer that submits an application for a vehicle or engine emissions family in 40 CFR 1036.205 and 1037.205. A certificate of conformity is valid from the indicated effective date until December 31 of the model year for which it is issued. The certificate must be renewed annually for any vehicle a manufacturer continues to produce.

*Certification* means process of obtaining a certificate of conformity for a vehicle family that complies with the emission standards and requirements in this part.

*Certified emission level* means the highest deteriorated emission level in an engine family for a given pollutant from the applicable transient and/or steady-state testing rounded to the same number of decimal places as the applicable standard. Note that you may have two certified emission levels for CO<sub>2</sub> if you certify a family for both vocational and tractor use.

*Chassis-cab* means the incomplete part of a vehicle that includes a frame, a completed occupant compartment and that requires only the addition of cargo-carrying, work-performing, or load-bearing components to perform its intended functions.

*Chief Counsel* means the NHTSA Chief Counsel, or his or her designee.

*Complete sister vehicle* is a complete vehicle of the same configuration as a cab-complete vehicle.

*Complete vehicle* has the meaning given in 49 CFR part 523.

*Compression-ignition (CI)* means relating to a type of reciprocating, internal-combustion engine, such as a diesel engine, that is not a spark-ignition engine. Note that 40 CFR 1036.1 also deems gas turbine engines and other engines to be compression-ignition engines.

*Configuration* means a subclassification within a test group for passenger cars, light trucks and medium-duty passenger vehicles and heavy-duty pickup trucks and vans which is based on basic engine, engine code, transmission type and gear ratios, and final drive ratio.

*Curb weight* has the meaning given in 40 CFR 86.1803.

*Date of manufacture* means the date on which the certifying vehicle manufacturer completes its manufacturing operations, except as follows:

(1) Where the certificate holder is an engine manufacturer that does not manufacture the complete or incomplete vehicle, the date of manufacture of the vehicle is based on the date assembly of the vehicle is completed.

(2) EPA and NHTSA may approve an alternate date of manufacture based on the date on which the certifying (or primary) vehicle manufacturer completes assembly at the place of main assembly, consistent with the provisions of 40 CFR 1037.601 and 49 CFR 567.4.

(3) A vehicle manufacturer that completes assembly of a vehicle at two or more facilities may ask to use as the month and year of manufacture, for that vehicle, the month and year in which manufacturing is completed at the place of main assembly, consistent with provisions of 49 CFR 567.4, as the model year. Note that such staged assembly is subject to the provisions of 40 CFR 1068.260(c). NHTSA's allowance of this provision is effective when EPA approves the manufacturer's certificates of conformity for these vehicles.

*Day cab* has the meaning given in 40 CFR 1037.801.

*Emergency vehicle* means a vehicle that meets one of the criteria in 40 CFR 1037.801.

*Engine family* has the meaning given in 40 CFR 1036.230.

*Excluded* means a vehicle or engine manufacturer or component is not required to comply with any aspects with the NHTSA fuel consumption program.

*Exempted* means a vehicle or engine manufacturer or component is not required to comply with certain provisions of the NHTSA fuel consumption program.

*Family certification level (FCL)* has the meaning given in 40 CFR 1036.801.

*Family emission limit (FEL)* has the meaning given in 40 CFR 1037.801.

*Final drive ratio* has the meaning in 40 CFR 1037.801.

*Final-stage manufacturer* has the meaning given in 49 CFR 567.3.

*Fleet* in this part means all the heavy-duty vehicles or engines within each of the regulatory sub-categories that are manufactured by a manufacturer in a particular model year and that are subject to fuel consumption standards under § 535.5.

*Fleet average fuel consumption* is the calculated average fuel consumption performance value for a manufacturer's fleet derived from the production weighted fuel consumption values of the unique vehicle configurations within each vehicle model type that makes up that manufacturer's vehicle fleet in a given model year. In this part, the fleet average fuel consumption value is determined for each manufacturer's fleet of heavy-duty pickup trucks and vans.

*Fleet average fuel consumption standard* is the actual average fuel consumption standard for a manufacturer's fleet derived from the production weighted fuel consumption standards of each unique vehicle configuration, based on payload, tow capacity and drive configuration (2, 4 or all-wheel drive), of the model types that makes up that manufacturer's vehicle fleet in a given model year. In this part, the fleet average fuel consumption standard is determined for each manufacturer's fleet of heavy-duty pickup trucks and vans.

*Fuel cell* means an electrochemical cell that produces electricity via the non-combustion reaction of a consumable fuel, typically hydrogen.

*Fuel cell electric vehicle* means a motor vehicle propelled solely by an electric motor where energy for the motor is supplied by a fuel cell.

*Fuel efficiency* means the amount of work performed for each gallon of fuel consumed.

*Gaseous fuel* has the meaning given in 40 CFR 1037.801.

*Good engineering judgment* has the meaning given in 40 CFR 1068.30. See 40 CFR 1068.5 for the administrative process used to evaluate good engineering judgment.

*Heavy-duty off-road vehicle* means a heavy-duty vocational vehicle or vocational tractor that is intended for off-road use.

*Heavy-duty vehicle* has the meaning given in 49 CFR part 523.

*Heavy-haul tractor* has the meaning given in 40 CFR 1037.801.

*Heavy heavy-duty (HHD) vehicle* means a Class 8 vehicle with a GVWR above 33,000 pounds.

*Hybrid engine or hybrid powertrain* means an engine or powertrain that includes energy storage features other than a conventional battery system or conventional flywheel. Supplemental

electrical batteries and hydraulic accumulators are examples of hybrid energy storage systems. Note that certain provisions in this part treat hybrid engines and powertrains intended for vehicles that include regenerative braking different than those intended for vehicles that do not include regenerative braking.

*Hybrid vehicle* means a vehicle that includes energy storage features (other than a conventional battery system or conventional flywheel) in addition to an internal combustion engine or other engine using consumable chemical fuel. Supplemental electrical batteries and hydraulic accumulators are examples of hybrid energy storage systems. Note that certain provisions in this part treat hybrid vehicles that include regenerative braking different than those that do not include regenerative braking.

*Incomplete vehicle* has the meaning given in 49 CFR part 523. For the purpose of this regulation, a manufacturer may request EPA and NHTSA to allow the certification of a vehicle as an incomplete vehicle if it manufactures the engine and sells the unassembled chassis components, provided it does not produce and sell the body components necessary to complete the vehicle.

*Light heavy-duty (LHD) vehicle* means a Class 2b through 5 vehicle with a GVWR at or below 19,500 pounds.

*Liquefied petroleum gas (LPG)* has the meaning given in 40 CFR 1036.801.

*Low rolling resistance tire* means a tire on a vocational vehicle with a tire rolling resistance level (TRRL) of 7.7 kg/metric ton or lower, a steer tire on a tractor with a TRRL of 7.7 kg/metric ton or lower, or a drive tire on a tractor with a TRRL of 8.1 kg/metric ton or lower.

*Medium heavy-duty (MHD) vehicle* means a Class 6 or 7 vehicle with a GVWR above 19,500 pounds GVWR but at or below 33,000 pounds.

*Model type* has the meaning given in 40 CFR 600.002.

*Model year* as it applies to engines means the manufacturer's annual new model production period, except as restricted under this definition. It must include January 1 of the calendar year for which the model year is named, may not begin before January 2 of the previous calendar year, and it must end by December 31 of the named calendar year. Manufacturers may not adjust model years to circumvent or delay compliance with standards.

*Model year* as it applies to vehicles means the manufacturer's annual new model production period, except as restricted under this definition and 40 CFR part 85, subpart X. It must include January 1 of the calendar year for which

the model year is named, may not begin before January 2 of the previous calendar year, and it must end by December 31 of the named calendar year.

(1) The manufacturer who holds the certificate of conformity for the vehicle must assign the model year based on the date when its manufacturing operations are completed relative to its annual model year period.

(2) Unless a vehicle is being shipped to a secondary manufacturer that will hold the certificate of conformity, the model year must be assigned prior to introduction of the vehicle into U.S. commerce. The certifying manufacturer must redesignate the model year if it does not complete its manufacturing operations within the originally identified model year. A vehicle introduced into U.S. commerce without a model year is deemed to have a model year equal to the calendar year of its introduction into U.S. commerce unless the certifying manufacturer assigns a later date.

*Natural gas* has the meaning given in 40 CFR 1036.801. Vehicles that use a pilot-ignited natural gas engine (which uses a small diesel fuel ignition system), are still considered natural gas vehicles.

*NHTSA Enforcement* means the NHTSA Associate Administrator for Enforcement, or his or her designee.

*Party* means the person alleged to have committed a violation of § 535.9, and includes manufacturers of vehicles and manufacturers of engines.

*Payload* means in this part the resultant of subtracting the curb weight from the gross vehicle weight rating.

*Petroleum* has the meaning given in 40 CFR 1036.801.

*Pickup truck* has the meaning given in 49 CFR part 523.

*Plug-in hybrid electric vehicle (PHEV)* means a hybrid electric vehicle that has the capability to charge the battery or batteries used for vehicle propulsion from an off-vehicle electric source, such that the off-vehicle source cannot be connected to the vehicle while the vehicle is in motion.

*Power take-off (PTO)* means a secondary engine shaft or other system on a vehicle that provides substantial auxiliary power for purposes unrelated to vehicle propulsion or normal vehicle accessories such as air conditioning, power steering, and basic electrical accessories. A typical PTO uses a secondary shaft on the engine to transmit power to a hydraulic pump that powers auxiliary equipment such as a boom on a bucket truck.

*Powertrain family* has the meaning given in 40 CFR 1037.231. Manufacturers choosing to perform powertrain testing as specified in 40 CFR 1037.550, divide product lines into powertrain families that are expected to have similar fuel consumptions and CO<sub>2</sub> emission characteristics throughout the useful life.

*Preliminary approval* means approval granted by an authorized EPA representative prior to submission of an application for certification, consistent with the provisions of 40 CFR 1037.210. For requirements involving NHTSA, EPA will ensure decisions are jointly made and will convey the decision to the manufacturer.

*Primary intended service class* has the meaning for engines as specified in 40 CFR 1036.140.

*Rechargeable Energy Storage System (RESS)* means the component(s) of a hybrid engine or vehicle that store recovered energy for later use, such as the battery system in a electric hybrid vehicle.

*Regulatory category* means each of the four types of heavy-duty vehicles defined in 49 CFR 523.6 and the heavy-duty engines used in these heavy-duty vehicles.

*Regulatory subcategory* means the sub-groups in each regulatory category to which fuel consumption standards and requirements apply, and are defined as follows:

(1) Heavy-duty pick-up trucks and vans.

(2) Vocational vehicle subcategories are shown in Tables 1 and 2 below and include vocational tractors. Table 1 includes vehicles complying with Phase 1 standards. Phase 2 vehicles are included in Table 2 which have 21 separate subcategories to account for differences in engine type, GVWR, and the vehicle characteristics corresponding to the duty cycles for vocational vehicles.

TABLE 1—PHASE 1 VOCATIONAL VEHICLE SUBCATEGORIES

LHD vocational vehicles.  
MHD vocational vehicles.  
HHD vocational vehicles.

TABLE 2—PHASE 2 VOCATIONAL VEHICLE SUBCATEGORIES

Engine type	LHD vocational vehicles	MHD vocational vehicles	HHD vocational vehicles
CI .....	Urban .....	Urban .....	Urban.
CI .....	Multi-Purpose .....	Multi-Purpose .....	Multi-Purpose.
CI .....	Regional .....	Regional .....	Regional.
CI and SI .....	Emergency .....	Emergency .....	Emergency.
SI .....	Urban .....	Urban .....	Urban.
SI .....	Multi-Purpose .....	Multi-Purpose .....	Multi-Purpose.
SI .....	Regional .....	Regional .....	Regional.

(3) Tractor subcategories are shown in Table 3 below for Phase 1 and 2. Table 3 includes 10 separate subcategories for tractors complying with Phase 1 and 2 standards. The heavy-haul tractor subcategory only applies for Phase 2.

TABLE 3—PHASE 1 AND 2 TRUCK TRACTOR SUBCATEGORIES

Class 7	Class 8 day cabs	Class 8 sleeper cabs
Low-roof tractors .....	Low-roof day cab tractors .....	Low-roof sleeper cab tractors.
Mid-roof tractors .....	Mid-roof day cab tractors .....	Mid-roof sleeper cab tractors.
High-roof tractors .....	High-roof day cab tractors .....	High-roof sleeper cab tractors.
		Heavy-haul tractors (applies only to Phase 2 program).

(4) Trailer subcategories are shown in Table 4 of this section for the Phase 2 program. Trailers do not comply under

the Phase 1 program. Table 4 includes 10 separate subcategories for trailers,

which are only subject to Phase 2 only standards.

TABLE 4—TRAILER SUBCATEGORIES

Full-aero trailers	Partial-aero trailers	Other trailers
Long box dry vans .....	Long box dry vans .....	Non-aero box vans. Non-box trailers.
Short box dry vans .....	Short box dry vans .....	
Long box refrigerated vans .....	Long box refrigerated vans .....	
Short box refrigerated vans .....	Short box refrigerated vans .....	

(5) Engine subcategories are shown in Table 5 below. Table 5 includes 6 separate subcategories for engines

which are the same for Phase 1 and 2 standards.

TABLE 5—ENGINE SUBCATEGORIES

LHD engines	MHD engines	HHD engines
CI engines for vocational vehicles .....	CI engines for vocational vehicles ..... CI engines for truck tractors .....	CI engines for vocational vehicles. CI engines for truck tractors.
All spark-ignition engines.		

*Roof height* means the maximum height of a vehicle (rounded to the nearest inch), excluding narrow accessories such as exhaust pipes and antennas, but including any wide accessories such as roof fairings. Measure roof height of the vehicle configured to have its maximum height that will occur during actual use, with properly inflated tires and no driver, passengers, or cargo onboard. Determine the base roof height on fully inflated tires having a static loaded radius equal to the arithmetic mean of the largest and smallest static loaded radius of tires a manufacturer offers or a standard tire EPA approves. If a vehicle is equipped with an adjustable roof fairing, measure the roof height with the fairing in its lowest setting. Once the maximum height is determined, roof heights are divided into the following categories:

- (1) Low-roof means a vehicle with a roof height of 120 inches or less.
- (2) Mid-roof means a vehicle with a roof height between 121 and 147 inches.
- (3) High-roof means a vehicle with a roof height of 148 inches or more.

*Service class group* means a group of engine and vehicle averaging sets defined as follows:

- (1) Spark-ignition engines, light heavy-duty compression-ignition engines, light heavy-duty vocational vehicles and heavy-duty pickup trucks and vans.

- (2) Medium heavy-duty compression-ignition engines and medium heavy-duty vocational vehicles and tractors.

- (3) Heavy heavy-duty compression-ignition engines and heavy heavy-duty vocational vehicles and tractors.

*Sleeper cab* means a type of truck cab that has a compartment behind the driver's seat intended to be used by the driver for sleeping. This includes both cabs accessible from the driver's compartment and those accessible from outside the vehicle.

*Small business manufacturer* means a manufacturer meeting the criteria specified in 13 CFR 121.201. For manufacturers owned by a parent company, the employee and revenue limits apply to the total number of employees and total revenue of the parent company and all its subsidiaries.

*Spark-ignition (SI)* means relating to a gasoline-fueled engine or any other type of engine with a spark plug (or other sparking device) and with operating characteristics significantly similar to the theoretical Otto combustion cycle. Spark-ignition engines usually use a throttle to regulate intake air flow to control power during normal operation. Note that some spark-ignition engines are subject to requirements that apply for compression-ignition engines as described in 40 CFR 1036.140.

*Subconfiguration* means a unique combination within a vehicle configuration of equivalent test weight, road-load horsepower, and any other operational characteristics or parameters that EPA determines may significantly affect CO<sub>2</sub> emissions within a vehicle configuration as defined in 40 CFR 600.002.

*Standard payload* means the payload assumed for each vehicle, in tons, for modeling and calculating emission credits, as follows:

- (1) For vocational vehicles:

- (i) 2.85 tons for light heavy-duty vehicles.

- (ii) 5.6 tons for medium heavy-duty vehicles.

- (iii) 7.5 tons for heavy heavy-duty vocational vehicles.

- (2) For tractors:

- (i) 12.5 tons for Class 7.

- (ii) 19 tons for Class 8.

- (iii) 43 tons for heavy-haul tractors.

- (3) For trailers:

- (i) 10 tons for short box vans.

- (ii) 19 tons for other trailers.

*Standard tractor* has the meaning given in 40 CFR 1037.501.

*Standard trailer* has the meaning given in 40 CFR 1037.501.

*Test group* means the multiple vehicle lines and model types that share critical emissions and fuel consumption related features and that are certified as a group by a common certificate of conformity issued by EPA and is used collectively with other test groups within an averaging set or regulatory subcategory and is used by NHTSA for determining the fleet average fuel consumption.

*Tire rolling resistance level (TRRL)* means a value with units of kg/metric ton that represents that rolling resistance of a tire configuration. TRRLs are used as inputs to the GEM model under 40 CFR 1037.520. Note that a manufacturer may assign a value higher than a measured rolling resistance of a tire configuration.

*Towing capacity* in this part is equal to the resultant of subtracting the gross vehicle weight rating from the gross combined weight rating.

*Trade* means to exchange fuel consumption credits, either as a buyer or a seller.

*Truck tractor* has the meaning given in 49 CFR 571.3. This includes most heavy-duty vehicles specifically designed for the primary purpose of pulling trailers, but does not include vehicles designed to carry other loads. For purposes of this definition “other loads” would not include loads carried in the cab, sleeper compartment, or toolboxes. Examples of vehicles that are similar to tractors but that are not tractors under this part include dromedary tractors, automobile haulers, straight trucks with trailers hitches, and tow trucks.

*U.S.-directed production volume* means the number of vehicle units, subject to the requirements of this part, produced by a manufacturer for which the manufacturer has a reasonable assurance that sale was or will be made to ultimate purchasers in the United States.

*Useful life* has the meaning given in 40 CFR 1036.801 and 1037.801.

*Vehicle configuration* means a unique combination of vehicle hardware and calibration (related to measured or modeled emissions) within a vehicle family. Vehicles with hardware or software differences, but that have no hardware or software differences related to measured or modeled emissions or fuel consumption can be included in the same vehicle configuration. Note that vehicles with hardware or software differences related to measured or modeled emissions or fuel consumption are considered to be different configurations even if they have the same GEM inputs and FEL. Vehicles within a vehicle configuration differ only with respect to normal production variability or factors unrelated to measured or modeled emissions and fuel consumption for EPA and NHTSA.

*Vehicle family* has the meaning given in 40 CFR 1037.230. Manufacturers designate families in accordance with

EPA provisions and may not choose different families between the NHTSA and EPA programs.

*Vehicle service class* has the meaning for vehicles as specified in the 40 CFR 1037.801.

*Vocational tractor* has the meaning given in 40 CFR 1037.801.

*Zero emissions vehicle* means an electric vehicle or a fuel cell vehicle.

#### § 535.5 Standards.

(a) *Heavy-duty pickup trucks and vans.* Each manufacturer's fleet of heavy-duty pickup trucks and vans shall comply with the fuel consumption standards in this paragraph (a) expressed in gallons per 100 miles. Each vehicle must be manufactured to comply for its useful life. If the manufacturer's fleet includes conventional vehicles (gasoline, diesel and alternative fueled vehicles) and advanced technology vehicles in Phase 1 (hybrids with regenerative braking, vehicles equipped with Rankine-cycle engines, electric and fuel cell vehicles), it should divide its fleet into two separate fleets each with its own separate fleet average fuel consumption standard which the manufacturer must comply with the requirements of this paragraph (a). NHTSA standards correspond to the same requirements for EPA as specified in 40 CFR 86.1819–14.

(1) *Mandatory standards.* For model years 2016 and later, each manufacturer must comply with the fleet average standard derived from the unique subconfiguration target standards (or groups of subconfigurations approved by EPA in accordance with 40 CFR 86.1819) of the model types that make up the manufacturer's fleet in a given model year. Each subconfiguration has a unique attribute-based target standard, defined by each group of vehicles having the same payload, towing capacity and whether the vehicles are equipped with a 2-wheel or 4-wheel drive configuration. Phase 1 target standards apply for model years 2016

through 2020. Phase 2 target standards apply for model year 2021 and afterwards.

(2) *Subconfiguration target standards.*

(i) Two alternatives exist for determining the subconfiguration target standards for Phase 1. For each alternative, separate standards exist for compression-ignition and spark-ignition vehicles:

(A) The first alternative allows manufacturers to determine a fixed fuel consumption standard that is constant over the model years; and

(B) The second alternative allows manufacturers to determine standards that are phased-in gradually each year.

(ii) Calculate the subconfiguration target standards as specified in this paragraph (a)(2)(ii), using the appropriate coefficients from Table 6 choosing between the alternatives in paragraph (a)(2)(i) of this section. For electric or fuel cell heavy-duty vehicles, use compression-ignition vehicle coefficients “c” and “d” and for hybrid (including plug-in hybrid), dedicated and dual-fueled vehicles, use coefficients “c” and “d” appropriate for the engine type used. Round each standard to the nearest 0.001 gallons per 100 miles and specify all weights in pounds rounded to the nearest pound. Calculate the subconfiguration target standards using the following equation:

$$\text{Subconfiguration Target Standard} \\ (\text{gallons per 100 miles}) = [c \times (\text{WF})] + d$$

Where:

$$\text{WF} = \text{Work Factor} = [0.75 \times (\text{Payload Capacity} + \text{Xwd})] + [0.25 \times \text{Towing Capacity}]$$

$$\text{Xwd} = 4\text{wd Adjustment} = 500 \text{ lbs if the vehicle group is equipped with 4wd and all-wheel drive, otherwise equals 0 lbs for 2wd.}$$

$$\text{Payload Capacity} = \text{GVWR (lbs)} - \text{Curb Weight (lbs)} \text{ (for each vehicle group)}$$

$$\text{Towing Capacity} = \text{GCWR (lbs)} - \text{GVWR (lbs)} \text{ (for each vehicle group)}$$

TABLE 6—COEFFICIENTS FOR MANDATORY SUBCONFIGURATION TARGET STANDARDS

Model year(s)	c	d
<b>Phase 1 Alternative 1—Fixed Target Standards</b>		
<b>CI Vehicle Coefficients</b>		
2016 to 2018 .....	0.0004322	3.330
2019 to 2020 .....	0.0004086	3.143
<b>SI Vehicle Coefficients</b>		
2016 to 2018 .....	0.0005131	3.961
2019 to 2020 .....	0.0004951	3.815

TABLE 6—COEFFICIENTS FOR MANDATORY SUBCONFIGURATION TARGET STANDARDS—Continued

Model year(s)	c	d
<b>Phase 1 Alternative 2—Phased-in Target Standards</b>		
<b>CI Vehicle Coefficients</b>		
2016 .....	0.0004519	3.477
2017 .....	0.0004371	3.369
2018 to 2020 .....	0.0004086	3.143
<b>SI Vehicle Coefficients</b>		
2016 .....	0.0005277	4.073
2017 .....	0.0005176	3.983
2018 to 2020 .....	0.0004951	3.815
<b>Phase 2—Fixed Target Standards</b>		
<b>CI Vehicle Coefficients</b>		
2021 .....	0.0003988	3.065
2022 .....	0.0003880	2.986
2023 .....	0.0003792	2.917
2024 .....	0.0003694	2.839
2025 .....	0.0003605	2.770
2026 .....	0.0003507	2.701
2027 and later .....	0.0003418	2.633
<b>SI Vehicle Coefficients</b>		
2021 .....	0.0004827	3.725
2022 .....	0.0004703	3.623
2023 .....	0.0004591	3.533
2024 .....	0.0004478	3.443
2025 .....	0.0004366	3.364
2026 .....	0.0004253	3.274
2027 and later .....	0.0004152	3.196

(3) *Fleet average fuel consumption standard.* (i) Calculate each manufacturer's fleet average fuel consumption standard for conventional and advanced technology fleets separately based on the

subconfiguration target standards specified in paragraph (a)(2) of this section, weighted to production volumes and averaged using the following equation combining all the applicable vehicles in a manufacturer's

U.S.-directed fleet (compression-ignition, spark-ignition and advanced technology vehicles) for a given model year, rounded to the nearest 0.001 gallons per 100 miles:

$$\text{Fleet Average Standard} = \frac{\sum [\text{Subconfiguration Target Standard}_i \times \text{Volume}_i]}{\sum [\text{Volume}_i]}$$

Subconfiguration Target Standard<sub>i</sub> = fuel consumption standard for each group of vehicles with same payload, towing capacity and drive configuration (gallons per 100 miles).

Volume<sub>i</sub> = production volume of each unique subconfiguration of a model type based upon payload, towing capacity and drive configuration.

(A) A manufacturer may group together subconfigurations that have the same test weight (ETW), GVWR, and GCWR. Calculate work factor and target value assuming a curb weight equal to two times ETW minus GVWR.

(B) A manufacturer may group together other subconfigurations if it

uses the lowest target value calculated for any of the subconfigurations.

(ii) For Phase 1, manufacturers must select an alternative for subconfiguration target standards at the same time they submit the model year 2016 pre-model year Report, specified in § 535.8. Once selected, the decision cannot be reversed and the manufacturer must continue to comply with the same alternative for subsequent model years.

(4) *Voluntary standards.* (i) Manufacturers may choose voluntarily to comply early with fuel consumption standards for model years 2013 through 2015, as determined in paragraphs (a)(4)(iii) and (iv) of this section, for

example, in order to begin accumulating credits through over-compliance with the applicable standard. A manufacturer choosing early compliance must comply with all the vehicles and engines it manufactures in each regulatory category for a given model year.

(ii) A manufacturer must declare its intent to voluntarily comply with fuel consumption standards at the same time it submits a Pre-Model Report, prior to the compliance model year beginning as specified in § 535.8; and, once selected, the decision cannot be reversed and the manufacturer must continue to comply for each subsequent model year for all the vehicles and engines it

manufactures in each regulatory category for a given model year.

(iii) Calculate separate subconfiguration target standards for

compression-ignition and spark-ignition vehicles for model years 2013 through 2015 using the equation in paragraph

(a)(2)(ii) of this section, substituting the appropriate values for the coefficients in the following table as appropriate:

TABLE 7—COEFFICIENTS FOR VOLUNTARY SUBCONFIGURATION TARGET STANDARDS

Model year(s)	c	d
<b>CI Vehicle Coefficients</b>		
2013 and 14 .....	0.0004695	3.615
2015 .....	0.0004656	3.595
<b>SI Vehicle Coefficients</b>		
2013 and 14 .....	0.0005424	4.175
2015 .....	0.0005390	4.152

(iv) Calculate the fleet average fuel consumption standards for model years 2013 through 2015 using the equation in paragraph (a)(3) of this section.

(5) *Exclusion of vehicles not certified as complete vehicles.* The vehicle standards in paragraph (a) of this section do not apply for vehicles that are chassis-certified with respect to EPA's criteria pollutant test procedure in 40 CFR part 86, subpart S. Any chassis-certified vehicles must comply with the vehicle standards and requirements of paragraph (b) of this section and the engine standards of paragraph (d) of this section for engines used in these vehicles. A vehicle manufacturer choosing to comply with this paragraph and that is not the engine manufacturer is required to notify the engine manufacturers that their engines are subject to paragraph (d) of this section and that it intends to use their engines in excluded vehicles.

(6) *Optional certification under this section.* Manufacturers may certify any complete or cab-complete Class 2b through 5 vehicles weighing at or below 19,500 pounds GVWR and any incomplete vehicles approved by EPA for inclusion under this paragraph to the same testing and standard that applies to a comparable complete sister vehicles as determined in accordance in 40 CFR 86.1819–14(j). Calculate the target standard value under paragraph (a)(2) of this section based on the same work factor value that applies for the complete sister vehicle.

(7) *Loose engines.* This paragraph applies for model year 2020 and earlier spark-ignition engines identical to engines used in vehicles certified to the standards of this paragraph (a), where manufacturers sell such engines as loose engines or installed in incomplete vehicles that are not cab-complete vehicles in accordance with 40 CFR 86.1819–14(k)(8). Vehicles in which those engines are installed are subject to

standards in paragraph (b) of this section and the engines are subject to standards in paragraph (d) of this section. Loose engines produced each model year must comply with provisions of 40 CFR 86.1819–14(k)(8).

(8) *Alternative fuel vehicle conversions.* Alternative fuel vehicle conversions may demonstrate compliance with the standards of this part or other alternative compliance approaches allowed by EPA in 40 CFR 85.525.

(9) *Useful life.* The following useful life values apply for the standards of this section:

(i) 120,000 miles or 10 years, whichever comes first, for Class 2b through Class 3 heavy-duty pickup trucks and vans certified to Phase 1 standards.

(ii) 150,000 miles or 15 years, whichever comes first, for Class 2b through Class 3 heavy-duty pickup trucks and vans certified to Phase 2 standards.

(iii) For Phase 1 credits that you calculate based on a useful life of 120,000 miles, multiply any banked credits that you carry forward for use into the Phase 2 program by 1.25. For Phase 1 credit deficits that you generate based on a useful life of 120,000 miles multiply the credit deficit by 1.25 if offsetting the shortfall with Phase 2 credits.

(10) *Optional standards.* For model years 2013 through 2019, manufacturers may calculate target standards “c” coefficients rounded to the nearest six decimal places (0.000001) and “d” coefficients rounded to the nearest two decimal places (0.01) based on the standards listed in tables 6 or 7. If a manufacturer chooses this option, the fleet standard calculated in accordance with paragraph (a)(3) of this section and fuel consumption rate calculated in accordance with paragraph (a)(5) of this section must be rounded to the nearest

0.01 gallons per 100 miles. If a manufacturer chooses this provision it will be applicable for all model years 2013 through 2019.

(b) *Heavy-duty vocational vehicles.* Each manufacturer building a complete or incomplete heavy-duty vocational vehicles shall comply with the fuel consumption standards in this paragraph (b) expressed in gallons per 1000 ton-miles. Engines used in heavy-duty vocational vehicles shall comply with the standards in paragraph (d) of this section. Each vehicle must be manufactured to comply for its useful life.

(1) *Mandatory standards.* Heavy-duty vocational vehicles produced for Phase 1 must comply with the fuel consumption standards in paragraph (b)(3) of this section. For Phase 2, each vehicle manufacturer of heavy-duty vocational vehicles must comply with the fuel consumption standards in paragraph (b)(4) of this section.

(i) For model years 2016 to 2020, the heavy-duty vocational vehicles are subdivided by GVWR into three regulatory subcategories as defined in § 535.4, each with its own assigned standard.

(ii) For model years 2021 and later, the heavy-duty vocational vehicle category is subdivided into 21 regulatory subcategories depending upon whether vehicles are equipped with a compression or spark ignition engine, as defined in § 535.4. Each subcategory has its own assigned standard.

(iii) For purposes of certifying vehicles to fuel consumption standards, manufacturers must divide their product lines in each regulatory subcategory into vehicle families that have similar emissions and fuel consumption features, as specified by EPA in 40 CFR part 1037, subpart C. These families will be subject to the

applicable standards. Each vehicle family is limited to a single model year.

(2) *Voluntary compliance.* (i) For model years 2013 through 2015, a manufacturer may choose voluntarily to comply early with the fuel consumption standards provided in paragraph (b)(3) of this section. For example, a manufacturer may choose to comply early in order to begin accumulating credits through over-compliance with the applicable standards. A manufacturer choosing early

compliance must comply with all the vehicles and engines it manufacturers in each regulatory category for a given model year.

(ii) A manufacturer must declare its intent to voluntarily comply with fuel consumption standards and identify its plans to comply before it submits its first application for a certificate of conformity for the respective model year as specified in § 535.8; and, once selected, the decision cannot be reversed and the manufacturer must

continue to comply for each subsequent model year for all the vehicles and engines it manufacturers in each regulatory category for a given model year.

(3) *Regulatory subcategory standards for model years 2013 to 2020.* The mandatory and voluntary fuel consumption standards for heavy-duty vocational vehicles are given in the following table:

TABLE 8—PHASE 1 VOCATIONAL VEHICLE FUEL CONSUMPTION STANDARDS  
[Gallons per 1000 ton-miles]

Regulatory subcategories	LHD Vocational vehicles	MHD Vocational vehicles	HHD Vocational vehicles
<b>Model Years 2013 to 2016 Voluntary Standards</b>			
Standard .....	38.1139	22.9862	22.2004
<b>Model Years 2017 to 2020 Mandatory Standards</b>			
Standard .....	36.6405	22.1022	21.8075

(4) *Regulatory subcategory standards for model years 2021 and later.* The mandatory fuel consumption standards

for heavy-duty vocational vehicles are given in the following table:

TABLE 9—PHASE 2 VOCATIONAL VEHICLE FUEL CONSUMPTION STANDARDS  
[gallons per 1000 ton-miles]

Duty cycle	LHD Vocational vehicles	MHD Vocational vehicles	HHD Vocational vehicles
<b>Model Years 2021 to 2023 Standards for CI Vehicles</b>			
Urban .....	29.0766	18.4676	19.4499
Multi-Purpose .....	29.9607	18.6640	19.6464
Regional .....	31.2377	18.2711	18.5658
<b>Model Years 2021 to 2023 Standards for SI Vehicles</b>			
Urban .....	36.0077	22.8424	24.0801
Multi-Purpose .....	37.0204	23.0674	24.3052
Regional .....	38.5957	22.6173	22.9549
<b>Model Years 2024 to 2026 Standards for CI Vehicles</b>			
Urban .....	27.8978	17.5835	18.6640
Multi-Purpose .....	28.6837	17.7800	18.8605
Regional .....	29.8625	17.4853	17.8782
<b>Model Years 2024 to 2026 Standards for SI Vehicles</b>			
Urban .....	35.1075	22.1672	23.4050
Multi-Purpose .....	36.1202	22.3923	23.6300
Regional .....	37.5830	22.0547	22.3923
<b>Model Years 2027 and later Standards for CI Vehicles</b>			
Urban .....	26.7191	16.8959	17.8782
Multi-Purpose .....	27.5049	17.0923	17.9764
Regional .....	28.6837	16.6994	17.0923
<b>Model Years 2027 and later Standards for SI Vehicles</b>			
Urban .....	33.6446	21.2670	22.0547
Multi-Purpose .....	34.6574	21.4921	22.2797



TABLE 9—PHASE 2 VOCATIONAL VEHICLE FUEL CONSUMPTION STANDARDS—Continued  
[gallons per 1000 ton-miles]

Duty cycle	LHD Vocational vehicles	MHD Vocational vehicles	HHD Vocational vehicles
Regional .....	36.1202	21.0420	21.1545

(5) *Regulatory subcategory standards for model year 2021 and later*

*emergency vehicles.* The mandatory fuel consumption standards for heavy-duty

emergency vehicles are given in the following table:

TABLE 10—PHASE 2 EMERGENCY VEHICLE FUEL CONSUMPTION STANDARDS  
[Gallons per 1000 ton-miles] \*

Regulatory subcategories	LHD Vocational vehicles	MHD Vocational vehicles	HHD Vocational vehicles
Model Years 2021 and later Emergency Vehicle Standards .....	30.6483	19.1552	21.1198

\* Vehicles certified to these alternative standards may not generate fuel consumption credits.

(6) *Subfamily standards.*

Manufacturers may specify a family emission limit (FEL) in terms of fuel consumption for each vehicle subfamily. The FEL may not be less than the result of fuel consumption modeling from 40 CFR 1037.520. The FELs is the fuel consumption standards for the vehicle subfamily instead of the standards specified in paragraph (b)(3) and (4) of this section and can be used for calculating fuel consumption credits in accordance with § 535.7.

(7) *Vehicle families for advanced and innovative technologies.* For vocational vehicles subject to Phase 1 standards, manufacturers must create separate vehicle families for vehicles that contain advanced or off-cycle technologies and group those vehicles together in a vehicle family if they use the same advanced or innovative technologies.

(8) *Certifying across service classes.* A manufacturer may optionally certify a vocational vehicle to the standards and useful life applicable to a heavier vehicle service class (or regulatory subcategory changes such as complying with the heavy heavy-duty standard instead of medium heavy-duty standard), provided the manufacturer does not generate credits with the vehicle. If a manufacturer includes lighter vehicles in a credit-generating subfamily (with an FEL below the standard), they must exclude their production volume from the credit calculation. Note that if the subfamily is a credit-using subfamily, the manufacturer must include the production volume of the lighter vehicles in the credit calculations.

(9) *Off-road exemptions.* Heavy-duty vocational vehicles, including vocational tractors meeting the off-road criteria in § 535.3 are exempted from the requirements in this paragraph (b) of this section, but the engines in these vehicles must meet the requirements of paragraph (d) of this section. Manufacturers may request approval in accordance with the provisions in 40 CFR 1037.150 and 40 CFR 1037.210 to determine if they are producing vehicles that meet the criteria for the heavy-duty off-road vehicle exemption. A manufacturer's request must be submitted in advance of the model year, or early enough in the model year, to ensure that an application for a certificate of conformity, as required in 40 CFR 1037.201, can be submitted if the approval is denied. The approval is a collaboration between NHTSA and EPA and can be given informally or through a formal determination. If a manufacturer requests a formal determination, the manufacturer must submit the required documentation in 40 CFR 1037.150 to both agencies.

(10) *Small business alternative fuel engine converters.* Small business alternative fuel engine converters may delay implementation of the standards in paragraph (b)(4) of this section for one year for each increase in stringency throughout the proposed rule.

(11) *Useful life.* The following useful life values apply for the standards of this section:

(i) 110,000 miles or 10 years, whichever comes first, for Class 2b through Class 5 vocational vehicles certified to Phase 1 standards.

(ii) 150,000 miles or 15 years, whichever comes first, for Class 2b

through Class 5 vocational vehicles certified to Phase 2 standards.

(iii) 185,000 miles or 10 years, whichever comes first, for Class 6 and Class 7 vehicles above 19,500 pounds GVWR and at or below 33,000 pounds GVWR for Phase 1 and for Phase 2.

(iv) 435,000 miles or 10 years, whichever comes first, for Class 8 vehicles above 33,000 pounds GVWR for Phase 1 and for Phase 2.

(v) For Phase 1 credits that you calculate based on a useful life of 110,000 miles, multiply any banked credits that you carry forward for use into the Phase 2 program by 1.36. For Phase 1 credit deficits that you generate based on a useful life of 110,000 miles multiply the credit deficit by 1.36, if offsetting the shortfall with Phase 2 credits.

(12) *Recreational vehicles.*

Recreational vehicles manufactured after model year 2020 must comply with the fuel consumption standards of this section. Manufacturers producing these vehicles may also certify to fuel consumption standards from 2014 through model year 2020. Manufacturers may earn credits retroactively for early compliance with fuel consumption standards. Once selected, a manufacturer cannot reverse the decision and the manufacturer must continue to comply for each subsequent model year for all the vehicles it manufacturers in each regulatory subcategory for a given model year.

(13) *Optional standards.* (i) For model years 2013 through 2019, manufacturers have the option to use heavy-duty vocational vehicle fuel consumption standards given in the following table:

TABLE 11—OPTIONAL VOCATIONAL VEHICLE FUEL CONSUMPTION STANDARDS  
[Gallons per 1,000 ton-miles]

Regulatory subcategories	LH vehicles	MH vehicles	HH vehicles
<b>Model Years 2017 to 2019 Mandatory Standards</b>			
Standard .....	36.7	22.1	21.8
<b>Model Year 2016 Mandatory Standard</b>			
Standard .....	38.1	23.0	22.2
<b>Model Years 2013 to 2015 Voluntary Standards</b>			
Standard .....	38.1	23.0	22.2

(ii) If a manufacturer chooses this option, the fuel consumption rate calculated in accordance with 49 CFR 535.6(b)(4) must be rounded to the nearest 0.1 gallons per 1,000 ton-miles.

(iii) If a manufacturer chooses this option, it must apply these same standards for each model year from 2013 through 2019.

(c) *Truck tractors.* Each manufacturer building truck tractors, except vocational tractors, with a GVWR above 26,000 pounds shall comply with the fuel consumption standards in this paragraph (c) expressed in gallons per 1000 ton-miles. Each vehicle must be manufactured to comply for its useful life.

(1) *Mandatory standards.* For model years 2016 and later, each manufacturer of truck tractors must comply with the fuel consumption standards in paragraph (c)(3) of this section.

(i) Based on the roof height and the design of the cab, truck tractors are divided into subcategories as described

in § 535.4. The standards that apply to each regulatory subcategory are shown in paragraphs (c)(2) and (3) of this section, each with its own assigned standard.

(ii) For purposes of certifying vehicles to fuel consumption standards, manufacturers must divide their product lines in each regulatory subcategory into vehicles families that have similar emissions and fuel consumption features, as specified by EPA in 40 CFR 1037.230, and these families will be subject to the applicable standards. Each vehicle family is limited to a single model year.

(iii) Standards for truck tractor engines are given in paragraph (d) of this section.

(2) *Voluntary compliance.* (i) For model years 2013 through 2015, a manufacturer may choose voluntarily to comply early with the fuel consumption standards provided in paragraph (c)(3) of this section. For example, a manufacturer may choose to comply

early in order to begin accumulating credits through over-compliance with the applicable standards. A manufacturer choosing early compliance must comply with all the vehicles and engines it manufacturers in each regulatory category for a given model year.

(ii) A manufacturer must declare its intent to voluntarily comply with fuel consumption standards and identify its plans to comply before it submits its first application for a certificate of conformity for the respective model year as specified in § 535.8; and, once selected, the decision cannot be reversed and the manufacturer must continue to comply for each subsequent model year for all the vehicles and engines it manufacturers in each regulatory category for a given model year.

(3) *Regulatory subcategory standards.* The fuel consumption standards for truck tractors, except for vocational tractors, are given in the following table:

TABLE 12—TRUCK TRACTOR FUEL CONSUMPTION STANDARDS  
[Gallons per 1,000 ton-miles]

Regulatory subcategories	Day cab		Sleeper cab	Heavy-haul
	Class 7	Class 8	Class 8	
Phase 1—Model Years 2013 to 2015 Voluntary Standards				
Low Roof .....	10.5108	7.9568	6.6798	.....
Mid Roof .....	11.6896	8.6444	7.4656	.....
High Roof .....	12.1807	9.0373	7.3674	.....
Phase 1—Model Year 2016 Mandatory Standard				
Low Roof .....	10.5108	7.9568	6.6798	.....
Mid Roof .....	11.6896	8.6444	7.4656	.....
High Roof .....	12.1807	9.0373	7.3674	.....
Phase 1—Model Years 2017 to 2020 Mandatory Standards				
Low Roof .....	10.2161	7.8585	6.4833	.....
Mid Roof .....	11.2967	8.4479	7.1709	.....
High Roof .....	11.7878	8.7426	7.0727	.....

TABLE 12—TRUCK TRACTOR FUEL CONSUMPTION STANDARDS—Continued  
[Gallons per 1,000 ton-miles]

Regulatory subcategories	Day cab		Sleeper cab	Heavy-haul
	Class 7	Class 8	Class 8	
Phase 2—Model Years 2021 to 2023 Mandatory Standards				
Low Roof .....	9.5285	7.6621	6.8762	5.3045
Mid Roof .....	10.5108	8.2515	7.6621	.....
High Roof .....	10.7073	8.4479	7.5639	.....
Phase 2—Model Years 2024 to 2026 Mandatory Standards				
Low Roof .....	8.8409	7.0727	6.2868	5.1081
Mid Roof .....	9.8232	7.6621	6.9745	.....
High Roof .....	9.9214	7.7603	6.8762	.....
Phase 2—Model Years 2027 and later Mandatory Standards				
Low Roof .....	8.5462	6.8762	6.0904	5.0098
Mid Roof .....	9.4303	7.4656	6.7780	.....
High Roof .....	9.4303	7.4656	6.5815	.....

(4) *Subfamily standards.* Manufacturers may specify a family emission limit (FEL) in terms of fuel consumption for each vehicle subfamily. The FEL may not be less than the result of fuel consumption modeling from 40 CFR 1037.520. The FEL serves as the fuel consumption standards for the vehicle subfamily instead of the standards specified in paragraph (c)(3) of this section and can be used for calculating fuel consumption credits in accordance with § 535.7.

(5) *Vehicle families for advanced and innovative technologies.* For tractors subject to Phase 1 standards, manufacturers must create separate vehicle families for vehicles that contain advanced or off-cycle technologies and group those vehicles together in a vehicle family if they use the same advanced or innovative technologies.

(6) *Certifying across service classes.* A manufacturer may optionally certify a tractor to the standards and useful life applicable to a heavier vehicle service class (or regulatory subcategory changes such as complying with the Class 8 day-cab tractor standard instead of Class 7 day-cab tractor), provided the manufacturer does not generate credits with the vehicle. If a manufacturer includes lighter vehicles in a credit-generating subfamily (with an FEL below the standard), exclude their production volume from the credit calculation. Note that if the subfamily is a credit-using subfamily, the manufacturer must include the production volume of the lighter vehicles in the credit calculations.

(7) *Vocational tractors.* Tractors meeting the definition of vocational tractors in 49 CFR 523.2 must comply

with requirements for heavy-duty vocational vehicles specified in paragraphs (b) and (d) of this section. Class 7 and Class 8 tractors certified or exempted as vocational tractors are limited in production to no more than 21,000 vehicles in any three consecutive model years. If a manufacturer is determined as not applying this allowance in good faith by EPA in its applications for certification in accordance with 40 CFR 1037.205 and 1037.610, a manufacturer must comply with the tractor fuel consumption standards in paragraph (c)(3) of this section.

(8) *Optional standards.* (i) For Phase 1, manufacturers may use the heavy-duty truck tractor fuel consumption standards given in the following table:

TABLE 13—OPTIONAL TRUCK TRACTOR FUEL CONSUMPTION STANDARDS FOR MODEL YEARS 2013 THROUGH 2019  
[Gallons per 1,000 ton-miles]

Regulatory subcategories	Day cab		Sleeper cab
	Class 7	Class 8	Class 8
<b>Model Years 2017 to 2019 Mandatory Standards</b>			
Low Roof .....	10.2	7.8	6.5
Mid Roof .....	11.3	8.4	7.2
High Roof .....	11.8	8.7	7.1
<b>Model Years 2016 Mandatory Standards</b>			
Low Roof .....	10.5	8	6.7
Mid Roof .....	11.7	8.7	7.4
High Roof .....	12.2	9	7.3
<b>Model Years 2013 to 2015 Voluntary Standards</b>			
Low Roof .....	10.5	8	6.7
Mid Roof .....	11.7	8.7	7.4

TABLE 13— OPTIONAL TRUCK TRACTOR FUEL CONSUMPTION STANDARDS FOR MODEL YEARS 2013 THROUGH 2019—  
Continued  
[Gallons per 1,000 ton-miles]

Regulatory subcategories	Day cab		Sleeper cab
	Class 7	Class 8	Class 8
High Roof .....	12.2	9	7.3

(ii) If a manufacturer chooses this option, the fuel consumption rate calculated in accordance with § 535.6(b)(4) must be rounded to the nearest 0.1 gallons per 1,000 ton-miles.

(iii) If a manufacturer chooses this option, it must apply these same standards for each model year from 2013 through 2019.

(9) *Useful life.* The following useful life values apply for the standards of this section:

(i) 185,000 miles or 10 years, whichever comes first, for Class 6 and Class 7 tractors above 19,500 pounds GVWR and at or below 33,000 pounds GVWR for Phase 1 and for Phase 2.

(ii) 435,000 miles or 10 years, whichever comes first, for Class 8 tractors above 33,000 pounds GVWR for Phase 1 and for Phase 2.

(d) *Heavy-duty engines.* Each manufacturer of heavy-duty engines shall comply with the fuel consumption standards in this paragraph (d) of this section expressed in gallons per 100 horsepower-hour. Each engine must be manufactured to comply for its useful life. The provisions of this part apply to all new 2014 model year and later heavy-duty engines. This includes engines fueled by conventional and alternative fuels for engines that will be installed in heavy-duty vehicles above 14,000 pounds GVWR. These provisions also apply for engines that will be installed in heavy-duty glider vehicles at or below 14,000 pounds GVWR. Each engine manufactured for use in a heavy-

duty tractor or vocational vehicle must be certified to the primary intended service class that it is designed for in accordance with 40 CFR 1036.108 and 1036.140.

(1) *Mandatory standards.*

Manufacturers of heavy-duty engines shall comply with the mandatory fuel consumption standards in paragraphs (d)(3) through (6) of this section for model years 2017 and later for compression-ignition engines and for model years 2016 and later for spark-ignition engines.

(i) The heavy-duty engine regulatory category is divided into six regulatory subcategories, five compression-ignition subcategories and one spark-ignition subcategory, as shown in Table 14 of this section.

(ii) Separate standards exist for engines manufactured for use in heavy-duty vocational vehicles and in truck tractors.

(iii) For purposes of certifying engines to fuel consumption standards, manufacturers must divide their product lines in each regulatory subcategory into engine families that have similar fuel consumption features and the same primary intended service class, as specified by EPA in 40 CFR 1036.230, and these families will be subject to the same standards. Each engine family is limited to a single model year.

(2) *Voluntary compliance.* (i) For model years 2013 through 2016 for compression-ignition engines, and for

model year 2015 for spark-ignition engines, a manufacturer may choose voluntarily to comply with the fuel consumption standards provided in paragraph (d)(3) through (5) of this section. For example, a manufacturer may choose to comply early in order to begin accumulating credits through over-compliance with the applicable standards. A manufacturer choosing early compliance must comply with all the vehicles and engines it manufactures in each regulatory category for a given model year except in model year 2013 the manufacturer may comply with individual engine families as specified in 40 CFR 1036.150(a)(2).

(ii) A manufacturer must declare its intent to voluntarily comply with fuel consumption standards and identify its plans to comply before it submits its first application for a certificate of conformity for the respective model year as specified in § 535.8; and, once selected, the decision cannot be reversed and the manufacturer must continue to comply for each subsequent model year for all the vehicles and engines it manufactures in each regulatory category for a given model year.

(3) *Regulatory subcategory standards.* The primary fuel consumption standards for heavy-duty engines are given in the following table:

TABLE 14—PRIMARY HEAVY-DUTY ENGINE FUEL CONSUMPTION STANDARDS  
[Gallons per 100 hp-hr]

Regulatory subcategory	LHD CI engines and all other engines	MHD CI engines and all other engines		HHD CI engines and all other engines		SI engines
		Vocational	Tractor	Vocational	Tractor	All
Application	Vocational					
<b>Phase 1—Voluntary Standards</b>						
2015 .....						7.0552
2013 to 2016 .....	5.8939	5.8939	4.9312	5.5697	4.666	
<b>Phase 1—Mandatory Standards</b>						
2016 .....						7.0552
2017 to 2020 .....	5.6582	5.6582	4.7839	5.4519	4.5187	7.0552

TABLE 14—PRIMARY HEAVY-DUTY ENGINE FUEL CONSUMPTION STANDARDS—Continued  
[Gallons per 100 hp-hr]

Regulatory subcategory	LHD CI engines and all other engines	MHD CI engines and all other engines		HHD CI engines and all other engines		SI engines
Application	Vocational	Vocational	Tractor	Vocational	Tractor	All
<b>Phase 2—Mandatory Standards</b>						
2021 to 2023 .....	5.5501	5.5501	4.7053	5.3438	4.4499	7.0552
2024 to 2026 .....	5.4617	5.4617	4.6071	5.2652	4.3517	7.0552
2027 and later .....	5.4322	5.4322	4.5776	5.2358	4.3320	7.0552

(4) *Alternate subcategory standards.* The alternative fuel consumption standards for heavy-duty compression-ignition engines are as follows:

(i) Manufacturers entering the voluntary program in model years 2014 through 2016, may choose to certify compression-ignition engine families unable to meet standards provided in paragraph (d)(3) of this section to the alternative fuel consumption standards of this paragraph (d)(4).

(ii) Manufacturers may not certify engines to these alternate standards if they are part of an averaging set in which they carry a balance of banked credits. For purposes of this section,

manufacturers are deemed to carry credits in an averaging set if they carry credits from advance technology that are allowed to be used in that averaging set in accordance with § 535.7(d)(12).

(iii) The emission standards of this section are determined as specified by EPA in 40 CFR 1036.620(a) through (c) and should be converted to equivalent fuel consumption values.

(5) *Alternate phase-in standards.* Manufacturers have the option to comply with EPA emissions standards for compression-ignition engines using an alternative phase-in schedule that correlates with EPA's OBD standards. If a manufacturer chooses to use the

alternative phase-in schedule for meeting EPA standards and optionally chooses to comply early with the NHTSA fuel consumption program, it must use the same phase-in schedule beginning in model year 2013 for fuel consumption standards and must remain in the program for each model year thereafter until model year 2020. The fuel consumption standard for each model year of the alternative phase-in schedule is provided in Table 15 of this section. Note that engines certified to these standards are not eligible for early credits under § 535.7.

TABLE 15—PHASE 1 ALTERNATIVE PHASE-IN CI ENGINE FUEL CONSUMPTION STANDARDS  
[Gallons per 100 hp-hr]

Tractors	LHD engines	MHD engines	HHD engines
Model Years 2013 to 2015 .....	NA	5.0295	4.7642
Model Years 2016 to 2020 <sup>†</sup> .....	NA	4.7839	4.5187
Vocational	LHD engines	MHD engines	HHD engines
Model Years 2013 to 2015 .....	6.0707	6.0707	5.6680
Model Years 2016 to 2020 <sup>†</sup> .....	5.6582	5.6582	5.4519

**Note:** <sup>†</sup> These alternate standards for 2016 and later are the same as the otherwise applicable standards through 2020.

(6) *Optional standards.* (i) For model years 2013 through 2020, manufacturers may use heavy-duty engine fuel

consumption standards given in the following tables:

TABLE 16—OPTIONAL PRIMARY HEAVY-DUTY ENGINE FUEL CONSUMPTION STANDARDS  
[Gallons per 100 hp-hr]

Regulatory subcategory	LHD CI engines	MHD CI engines		HHD CI engines		SI Engines
Application	Vocational	Vocational	Tractor	Vocational	Tractor	All
<b>Mandatory Standards</b>						
Model Years .....	2017 to 2020					2016 to 2019
Standards .....	5.66	5.66	4.78	5.45	4.52	7.06
<b>Voluntary Standards</b>						
Model Years .....	2013 to 2016					2015
Standards .....	5.89	5.89	4.93	5.57	4.67	7.06

TABLE 17—ALTERNATIVE PHASE-IN CI ENGINE FUEL CONSUMPTION STANDARDS  
[Gallons per 100 hp-hr]

Truck Tractors	LHD CI engines	MHD CI engines	HHD CI engines
Model Years 2013 to 2015 .....	NA .....	5.03 .....	4.76 .....
Model Years 2016 to 2020 <sup>†</sup> .....	NA .....	4.78 .....	4.52 .....
Vocational vehicles .....	LHD CI Engines .....	MHD CI Engines .....	HHD CI Engines .....
Model Years 2013 to 2015 .....	6.07 .....	6.07 .....	5.67 .....
Model Years 2016 and later <sup>†</sup> .....	5.66 .....	5.66 .....	5.45 .....

(ii) If a manufacturer chooses this option, the fuel consumption rate calculated in accordance with § 535.6(c)(4) must be rounded to the nearest 0.01 gallon per 100 hp-hr.

(iii) If a manufacturer chooses this option, it must apply these same standards for each model year from 2013 through 2020.

(7) *Specialty vehicles.* Manufacturers of specialty vehicles as identified in 40 CFR 1037.605 may comply with fuel consumption standards by complying with alternate emission standards that are equivalent to standards that apply for non-road engines as identified in 40 CFR 1037.605, and using § 535.6 and exercising good engineering judgment to determine equivalent fuel consumption standards.

(8) *Alternative fuel conversions.* Engines that have been converted to operate on alternative fuels may demonstrate compliance with the standards of this part or other alternative compliance approaches allowed by EPA in 40 CFR 85.525.

(9) *Useful life.* The following useful life values apply for the standards of this section:

(i) 110,000 miles or 10 years, whichever comes first, for engines used in Class 2b through Class 5 vehicles certified to Phase 1 standards.

(ii) 150,000 miles or 15 years, whichever comes first, for engines used in Class 2b through Class 5 vehicles certified to Phase 2 standards.

(iii) 185,000 miles or 10 years, whichever comes first, for engines used in Class 6 and Class 7 vehicles above 19,500 pounds GVWR and at or below 33,000 pounds GVWR for Phase 1 and for Phase 2.

(iv) 435,000 miles or 10 years, whichever comes first, for engines used

in Class 8 vehicles above 33,000 pounds GVWR for Phase 1 and for Phase 2.

(v) For Phase 1 credits that you calculate based on a useful life of 110,000 miles, multiply any banked credits that you carry forward for use into the Phase 2 program by 1.36. For Phase 1 credit deficits that you generate based on a useful life of 110,000 miles multiply the credit deficit by 1.36, if offsetting the shortfall with Phase 2 credits.

(e) *Heavy-duty Trailers.* Each manufacturer of heavy-duty trailers as specified in 49 CFR 523.10, shall comply with the fuel consumption standards in paragraph (e)(1) of this section expressed in gallons per 1000 ton-miles. Each vehicle must be manufactured to comply for its useful life. There are no Phase 1 standards for trailers. Different levels of stringency apply for box vans depending on features that may affect aerodynamic performance.

(1) *Fuel consumption standards.* Trailers manufactured in model year 2021 and later must comply with the fuel consumption standards of this section. For model years 2018 through 2020, trailer manufacturers have the option to voluntarily comply with the fuel consumption standards of this section.

(i) *Non-aero and non-box trailer standards.* Non-aero and non-box trailers must comply with the regulatory subcategory fuel consumption standards in this section.

(A) “Non-aero trailers” for trailers 35 feet or longer are box vans that have a rear lift gate or rear hinged ramp, and at least one of the following side features: Side lift gate, belly box, side-mounted pull-out platform, steps for

side-door access, or a drop-deck design. “Non-aero trailers” for trailers less than 35 feet long are refrigerated box vans with at least one of the side features identified for longer trailers.

(B) Non-box trailers and non-aero trailers must meet the following standards:

(1) Trailers must use qualified automatic tire inflation systems with all load-bearing wheels.

(2) Trailers must use tires with a TRRL at or below 4.7 kg/ton. Through model year 2023, trailers may instead use tires with a TRRL at or below 5.1 kg/ton.

(ii) *Partial-aero trailer standards.* Partial-aero trailers must comply with the regulatory subcategory fuel consumption standards as follows:

(A) “Partial-aero trailers” are box vans that have at least one of the side features identified in paragraph (e)(1)(i)(A) of this section. Long box vans also qualify as partial-aero trailers if they have a rear lift gate or rear hinged ramp.

(B) Partial-aero trailers may continue to meet the 2024 standards in 2027 and later model years. This provision does not apply for short refrigerated vans because their standard does not change in 2027.

(iii) *Full-aero trailers.* Full-aero trailers comply with the regulatory subcategory fuel consumption standards as follows:

(A) “Full-aero trailers” are box vans that do not meet the specifications for non-aero or partial-aero trailers in paragraph (e)(1)(i)(A) or (e)(1)(ii)(A) of this section.

(B) Fuel consumption standards apply for full-aero trailers as specified in the following table:

TABLE 18—PHASE 2 FUEL AERO TRAILER FUEL CONSUMPTION STANDARDS

[Gallons per 1,000 ton-miles]

Model years	Dry van		Refrigerated van	
	Long	Short	Long	Short
<b>Voluntary Standards</b>				
2018 to 2020 .....	8.1532	14.1454	8.2515	14.4401

TABLE 18—PHASE 2 FUEL AERO TRAILER FUEL CONSUMPTION STANDARDS—Continued  
[Gallons per 1,000 ton-miles]

Model years	Dry van		Refrigerated van	
	Long	Short	Long	Short
<b>Mandatory Standards</b>				
2021 to 2023 .....	7.9568	13.9489	8.0550	14.3418
2024 to 2026 .....	7.7603	13.8507	7.9568	14.1454
2027 and later .....	7.5639	13.7525	7.8585	14.1454

(C) For purposes of certifying vehicles to fuel consumption standards, manufacturers must divide their product lines into vehicles families that have similar emissions and fuel consumption features, as specified by EPA in 40 CFR part 1037.230, and these families will be subject to the applicable standards. Each vehicle family is limited to a single model year.

(2) *Subfamily standards.* Manufacturers may specify a Family Emission Limit (FEL) in terms of fuel consumption for each vehicle subfamily. The FEL may not be less than the result of fuel consumption modeling from 40 CFR 1037.520. The FEL is the fuel consumption standard for the vehicle subfamily instead of the standard specified in paragraph (e)(1)(ii) and (iii) of this section and can be used for calculating fuel consumption credits in accordance with § 535.7.

Manufacturers may not use averaging for non-box trailers, partial-aero trailers, or non-aero trailers that meet standards under paragraph (e)(1) of this section, and may not use fuel consumption credits for banking or trading for any trailers.

(3) *Useful life.* The fuel consumption standards of this section apply for a useful life equal to 10 years.

#### § 535.6 Measurement and calculation procedures.

Determine all vehicle parameters used for testing in accordance with EPA's provisions in 40 CFR 1037.140. Manufacturers conducting testing for certification or annual demonstration testing and providing CO<sub>2</sub> emissions data to EPA must also provide equivalent fuel consumption results for all values. NHTSA and EPA reserve the right to verify separately or in coordination the results of any testing and measurement established by manufacturers in complying with the provisions of this program and as specified in 40 CFR 1037.301 and § 535.9. Any carry over data from the

Phase 1 program may be carried into the Phase 2 only with approval from EPA and by using good engineering judgment considering differences in test protocols for testing procedure.

(a) *Heavy-duty pickup trucks and vans.* This section describes the testing a manufacturer must perform for each model year and the method for determining the fleet fuel consumption performance to show compliance with the fleet average fuel consumption standard for heavy-duty pickup trucks and vans in § 535.5(a).

(1) For each model year, the heavy-duty pickup trucks and vans selected by a manufacturer to comply with fuel consumption standards in § 535.5(a) must be used to determine the manufacturer's fleet average fuel consumption performance. If the manufacturer's fleet includes conventional and advanced technology heavy-duty pickup trucks and vans, the fleet should be sub-divided into two separate vehicle fleets, with all of the conventional vehicles in one fleet and all of the advanced technology vehicles in the other fleet.

(2) Vehicles in each fleet should be divided into test groups or subconfigurations according to EPA in 40 CFR part 86, subpart S.

(3) Test and measure the CO<sub>2</sub> emissions test results for the selected vehicles and determine the CO<sub>2</sub> emissions test group result, in grams per mile in accordance with 40 CFR part 86, subpart S.

(i) Perform exhaust testing on vehicles fueled by conventional and alternative fuels, including dedicated and dual-fueled (multi-fuel and flexible-fuel) vehicles and measure the CO<sub>2</sub> emissions test result.

(ii) Adjust the CO<sub>2</sub> emissions test result of dual-fueled vehicles using a weighted average of your emission results as specified in 40 CFR 600.510–12(k) for light-duty trucks.

(iii) All electric vehicles are deemed to have zero emissions of CO<sub>2</sub>, CH<sub>4</sub>, and

N<sub>2</sub>O. No emission testing is required for such electric vehicles. Assign the fuel consumption test group result to a value of zero gallons per 100 miles in paragraph (a)(4) of this section.

(iv) Test cab-complete and incomplete vehicles using the applicable complete sister vehicles as determined in 40 CFR part 86.

(v) Test loose engines using applicable complete vehicles as determined in 40 CFR part 86.

(vi) Manufacturers can choose to analytically derive CO<sub>2</sub> emission rates (ADCs) for test groups or subconfigurations. Calculate the ADCs for test groups or subconfigurations in accordance with 40 CFR 86.1819–14 (g).

(4) Calculate equivalent fuel consumption test group results, in gallons per 100 miles, from CO<sub>2</sub> emissions test group results, in grams per miles, and round to the nearest 0.001 gallon per 100 miles.

(i) Calculate the equivalent fuel consumption test group results as follows for compression-ignition vehicles and alternative fuel compression-ignition vehicles. CO<sub>2</sub> emissions test group result (grams per mile)/10,180 grams per gallon of diesel fuel) × (10<sup>2</sup>) = Fuel consumption test group result (gallons per 100 mile).

(ii) Calculate the equivalent fuel consumption test group results as follows for spark-ignition vehicles and alternative fuel spark-ignition vehicles. CO<sub>2</sub> emissions test group result (grams per mile)/8,877 grams per gallon of gasoline fuel) × (10<sup>2</sup>) = Fuel consumption test group result (gallons per 100 mile).

(5) Calculate the fleet average fuel consumption result, in gallons per 100 miles, from the equivalent fuel consumption test group results and round the fuel consumption result to the nearest 0.001 gallon per 100 miles. Calculate the fleet average fuel consumption result using the following equation.

$$\text{Fleet Average Fuel Consumption} = \frac{\sum [\text{Fuel Consumption Test Group Result}_i \times \text{Volume}_i]}{\sum [\text{Volume}_i]}$$

Where:

Fuel Consumption Test Group Result<sub>i</sub> = fuel consumption performance for each test group as defined in 49 CFR 523.4.

Volume<sub>i</sub> = production volume of each test group.

(6) Compare the fleet average fuel consumption standard to the fleet average fuel consumption performance. The fleet average fuel consumption performance must be less than or equal to the fleet fuel consumption standard to comply with standards in § 535.5(a).

(b) *Heavy-duty vocational vehicles and tractors.* This section describes the testing a manufacturer must perform and the method for determining fuel consumption performance to show compliance with the fuel consumption standards for vocational vehicles and tractors in § 535.5(b) and (c).

(1) Select vehicles and vehicle family configurations to test as specified in 40 CFR 1037.230 for vehicles that make up each of the manufacturer's regulatory subcategories of vocational vehicles and tractors.

(2) Determine the CO<sub>2</sub> emissions and fuel consumption results for all vehicles (conventional, alternative fueled and advanced technology vehicles) using the Greenhouse Emissions Model (GEM) in accordance with 40 CFR part 1037, subpart F. Vocational vehicles and tractors are modeled using the following inputs in the GEM model.

(3) For Phase 1, all of the following GEM inputs apply for sleeper cab tractors, and day cab tractors. Some do not apply for vocational vehicles and other tractor regulatory subcategories, as follows:

(i) Manufacturers must identify vehicles according to their regulatory subcategory, as defined in § 535.4, for use in GEM (such as "Class 8 Combination—Sleeper Cab—High Roof").

(ii) Coefficient of aerodynamic drag in accordance with 40 CFR 1037.520 and 1037.525. Do not use for vocational vehicles.

(iii) Steer tire rolling resistance for low rolling resistance tires in accordance with 40 CFR 1037.520 and 1037.650.

(iv) Drive tire rolling resistance for low rolling resistance tires in accordance with 40 CFR 1037.520 and 1037.650.

(v) Vehicle speed limit as governed by vehicles speed limiters in accordance

with 40 CFR 1037.520 and 1037.640. Do not use for vocational vehicles.

(vi) Vehicle weight reduction as provided in accordance with 40 CFR 1037.520. Do not use for vocational vehicles.

(vii) Extended idle reduction credit using automatic engine shutdown systems in accordance with 40 CFR 1037.520 and 1037.660. Do not use for vehicles other than Class 8 sleeper cabs.

(4) For Phase 1, engine performance and the advanced technologies equipped on vocational vehicles and tractors are tested separately as follows:

(i) Test results for engines installed in vocational vehicles and tractors, for both conventional and alternative fueled vehicles, are determined in accordance with paragraph (c) of this section.

(ii) Improvements for advanced technologies are determined as follows:

(A) Test hybrid vehicles with power take-off in accordance with 40 CFR 1037.540.

(B) Vehicles with post-transmission hybrid systems are determined in accordance with 40 CFR 1037.550.

(5) For Phase 2, manufacturers are allowed to add additional specifications to improve fuel consumption performance in GEM as specified in 40 CFR 1037.520. Additional GEM inputs apply for Phase 2 tractors and vocational vehicles as follows:

(i) Transmission make, model, type, and the gear ratio for every available forward gears.

(ii) Engine make, model, fuel type, engine family name, calibration identification. Also identify whether the engine is subject to spark-ignition or compression-ignition standards under 40 CFR part 1036.

(iii) Drive axle ratio. If a vehicle is designed with two or more user-selectable axle ratios, use the axle ratio that is expected to be engaged for the greatest driving distance.

(iv) Various engine and vehicle operational characteristics, as described in 40 CFR 1037.520(f).

(v) Engine fuel maps, which include an idle fuel map for vocational vehicles.

(vi) Engine full-load torque curve and motoring torque curve.

(vii) Loaded tire radius, based upon nominal design specifications, expressed to the nearest 0.01m as described in 40 CFR 1037.140.

(viii) Hybrid power take-off (for vocational vehicles only).

(6) Manufacturers may certify their vehicles based on powertrain testing as

described in 40 CFR 1037.550, rather than fuel maps, to characterize fuel consumption rates at different speed and torque values.

(7) Emergency vehicles complying with alternative standards specified in § 535.5(b) and 40 CFR 1037.105(b)(4), run GEM by identifying the vehicle as an emergency vehicle and enter values for tire rolling resistance only.

(8) You may use a default fuel map for specialty vehicles using engines certified to alternate standards under 40 CFR 1037.605.

(9) Manufacturers of vehicles that run on fuel other than gasoline or diesel, should use good engineering judgment to adjust modeling output values to account for the physical properties of the fuel.

(10) From the GEM results, select the CO<sub>2</sub> family emissions level (FEL) and equivalent fuel consumption values for vocational vehicle and tractor families in each regulatory subcategory for each model year. Equivalent fuel consumption FELs are derived in GEM and expressed to the nearest 0.0001 gallons per 1000 ton-mile. For families containing multiple subfamilies, identify the FELs for each subfamily.

(11) All electric vehicles are deemed to have zero CO<sub>2</sub> emissions and fuel consumption. No emission testing is required for such electric vehicles. Assign the vehicle family with a fuel consumption FEL result to a value of zero gallons per 1000-ton miles.

(c) [Reserved]

(d) *Heavy-duty engines.* This section describes the testing a manufacturer must perform and the method for determining fuel consumption performance to show compliance with the fuel consumption standards for engines in § 535.5(d). Each engine must be tested to the primary intended service class that it is designed for in accordance with 40 CFR 1036.108. For engines using aftertreatment technology with infrequent regeneration events test in accordance with 40 CFR 86.004–28,

(1) Manufacturers must select emission-data engines and engine family configurations to test as specified in 40 CFR part 86 for engines in heavy-duty pickup trucks and vans and 40 CFR 1036.235 for engines installed in truck tractors and vocational vehicles that make up each of the manufacturer's regulatory subcategories.

(2) Test the CO<sub>2</sub> emissions for each emissions-data engine subject to the



standards in § 535.5(d) using the procedures and equipment specified in 40 CFR part 1036, subpart F. Measure the CO<sub>2</sub> emissions in grams per hp-hr as specified in 40 CFR 1036.501. For medium and heavy heavy-duty engines certified as tractor engines, measure CO<sub>2</sub> emissions using the steady-state duty cycle specified in 40 CFR 86.1362. For medium and heavy heavy-duty engines certified as both tractor and vocational engines, measure CO<sub>2</sub> emissions using the steady-state duty cycle and the transient duty cycle (sometimes referred to as the FTP engine cycle), both of which are specified in 40 CFR part 86, subpart N.

(i) Perform exhaust testing on each fuel type for conventional, dedicated, dual-fueled (multi-fuel, and flexible-fuel) vehicles and measure the CO<sub>2</sub> emissions level as specified in 40 CFR part 1036.

(ii) Adjust the CO<sub>2</sub> emissions result of dual-fueled vehicles using a weighted average of the demonstrated emission results as specified in 40 CFR 1036.225. If EPA disapproves a manufacturer's dual-fueled vehicle demonstrated use submission, NHTSA will require the manufacturer to only use the test results with 100 percent conventional fuel to determine the fuel consumption of the engine.

(iii) All electric vehicles are deemed to have zero emissions of CO<sub>2</sub> and zero fuel consumption. No emission or fuel consumption testing is required for such electric vehicles.

(3) Determine the CO<sub>2</sub> emissions for the family certification level (FCL) from the emissions test results in paragraph (c)(2) of this section for engine families within the heavy-duty engine regulatory subcategories for each model year.

(i) If a manufacturer certifies an engine family for use both as a vocational engine and as a tractor engine, the manufacturer must split the family into two separate subfamilies in accordance with 40 CFR 1036.230. The manufacturer may assign the numbers and configurations of engines within the respective subfamilies at any time prior to the submission of the end-of-year report required by 40 CFR 1036.730 and § 535.8. The manufacturer must track into which type of vehicle each engine is installed, although EPA may allow the manufacturer to use statistical methods to determine this for a fraction of its engines.

(ii) The following engines are excluded from the engine families used to determine FCL values and the benefit for these engines is determined as an advanced technology credit under the ABT provisions provided in

§ 535.7(e); these provisions apply only for the Phase 1 program:

(A) Engines certified as hybrid engines or power packs.

(B) Engines certified as hybrid engines designed with PTO capability and that are sold with the engine coupled to a transmission.

(C) Engines with Rankine cycle waste heat recovery.

(4) Calculate equivalent fuel consumption values for emissions FCLs and the CO<sub>2</sub> levels for certified engines, in gallons per 100 hp-hr and round each fuel consumption value to the nearest 0.0001 gallon per 100 hp-hr.

(i) Calculate equivalent fuel consumption FCL values for compression-ignition engines and alternative fuel compression-ignition engines. CO<sub>2</sub> FCL value (grams per hp-hr)/10,180 grams per gallon of diesel fuel  $\times (10^2)$  = Fuel consumption FCL value (gallons per 100 hp-hr).

(ii) Calculate equivalent fuel consumption FCL values for spark-ignition engines and alternative fuel spark-ignition engines. CO<sub>2</sub> FCL value (grams per hp-hr)/8,877 grams per gallon of gasoline fuel  $\times (10^2)$  = Fuel consumption FCL value (gallons per 100 hp-hr).

(iii) Manufacturers may carryover fuel consumption data from a previous model year if allowed to carry over emissions data for EPA in accordance with 40 CFR 1036.235.

(iv) If a manufacturer uses an alternate test procedure under 40 CFR 1065.10 and subsequently the data is rejected by EPA, NHTSA will also reject the data.

(e) *Heavy-duty trailers.* This section describes the testing a manufacturer must perform and the method for determining fuel consumption performance to show compliance with the fuel consumption standards for trailers in § 535.5(e).

(1) Select trailer family configurations to test as specified in 40 CFR 1037.235 for trailers that make up each of the manufacturer's regulatory subcategories of heavy-duty trailers.

(2) Obtain preliminary approvals for trailers aerodynamic devices from EPA in accordance with 40 CFR 1037.150.

(3) For manufacturers voluntarily complying in model years 2018 through 2020, and for trailers complying with mandatory standards in model years 2021 and later, determine the CO<sub>2</sub> emissions and fuel consumption results for partial- and full-aero trailers using the equations and technologies specified in CFR part 1037, subpart F. Use testing to determine input values in accordance with 40 CFR 1037.515.

(4) Non-box trailers and non-aero trailers certified using design-based

certification must meet tire rolling resistance levels, and use tire inflation systems on all load-bearing wheels as prescribed in 40 CFR 1037.150.

(5) Box trailer manufacturers shall use a GEM-based equation to calculate CO<sub>2</sub> emissions, as specified in 40 CFR 1037.515. From the equation results, calculate the CO<sub>2</sub> family emissions level (FEL) and equivalent fuel consumption values for trailer families in the long dry van, short dry van, long refrigerated van, and short refrigerated van regulatory subcategories for each model year. Equivalent fuel consumption FELs are expressed to the nearest 0.0001 gallons per 1000 ton-mile. For families containing multiple subfamilies, identify the FELs for each subfamily.

#### **§ 535.7 Averaging, banking, and trading (ABT) credit program.**

(a) *General provisions.* After the end of each model year, manufacturers must comply with the fuel consumption standards in § 535.5 by averaging, banking and trading credits. Trailer manufacturers are excluded from this section except for those producing full-aero box trailers, which may comply with special provisions in paragraph (e) of this section. Manufacturers comply with standards if the sum of averaged, banked and traded credits generate a "zero" credit balance or a credit surplus within an averaging set of vehicles or engines. Manufacturers fail to comply with standards if the sum of the credit flexibilities generate a credit deficit (or shortfall) in an averaging set. Credit shortfalls must be offset by banked or traded credits within three model years after the shortfall is incurred. These processes are hereafter referenced as the NHTSA ABT credit program. The following provisions apply to all fuel consumption credits.

(1) *Credits (or fuel consumption credits (FCCs)).* Credits in this part mean a calculated weighted value representing the difference between the fuel consumption performance and the standard of a vehicle or engine family or fleet within a particular averaging set. Positive credits represent cases where a vehicle or engine family or fleet perform better than the applicable standard (the fuel consumption performance is less than the standard) whereas negative credits represent underperforming cases. The value of a credit is calculated according to sections (b) through (e) of this section. FCCs are only considered earned or useable for averaging, banking or trading after EPA and NHTSA have verified the information in a manufacturer's final reports required in § 535.8. Types of FCCs include the following:

(i) *Conventional credits.* Credits generated by vehicle or engine families or fleets containing conventional vehicles (*i.e.*, gasoline, diesel and alternative fueled vehicles).

(ii) *Early credits.* Credits generated by vehicle or engine families or fleets produced for model year 2013. Early credits are multiplied by an incentive factor of 1.5 times.

(iii) *Advanced technology credits.* Credits generated by vehicle or engine families or subconfigurations containing vehicles with advanced technologies (*i.e.*, hybrids with regenerative braking, vehicles equipped with Rankine-cycle engines, electric and fuel cell vehicles) and incentivized under this ABT credit program in paragraph (f)(1) of this section and by EPA under 40 CFR 86.1819–14(d)(7), 1036.615, and 1037.615.

(iv) *Innovative and off-cycle technology credits.* Credits generated by vehicle or engine families or subconfigurations having fuel consumption reductions resulting from technologies not reflected in the GEM simulation tool or in the FTP chassis dynamometer. These innovative and off-cycle technology are incentivized under this fuel consumption program in paragraph (f)(2) of this section and by EPA under 40 CFR 86.1819–14(d)(13), 1036.610, and 1037.610.

(2) *Averaging.* Averaging is the summing of a manufacturer's positive and negative FCCs for engines or vehicle families or fleets within an averaging set. The principle averaging sets are defined in § 535.4.

(i) A credit surplus occurs when the net sum of the manufacturer's generated credits for engines or vehicle families or fleets within an averaging set is positive (a zero credit balance is when the sum equals zero).

(ii) A credit deficit occurs when the net sum of the manufacturer's generated credits for engines or vehicle families or fleets within an averaging set is negative.

(iii) Positive credits, other than advanced technology credits, generated and calculated within an averaging set may only be used to offset negative credits within the same averaging set.

(iv) Manufacturers may certify one or more vehicle families (or subfamilies) to an FEL above the applicable fuel consumption standard, subject to any applicable FEL caps and other provisions allowed by EPA in 40 CFR parts 1036 and 1037, if the manufacturer shows in its application for certification to EPA that its projected balance of all FCC transactions in that model year is greater than or equal to zero or that a

negative balance is allowed by EPA under 40 CFR 1036.745 and 1037.745.

(v) If a manufacturer certifies a vehicle family to an FEL that exceeds the otherwise applicable standard, it must obtain enough FCC to offset the vehicle family's deficit by the due date of its final report required in § 535.8. The emission credits used to address the deficit may come from other vehicle families that generate FCCs in the same model year (or from the next three subsequent model years), from banked FCCs from previous model years, or from FCCs generated in the same or previous model years that it obtained through trading. Note that the option for using banked or traded credits does not apply for trailers.

(vi) Manufacturers may certify a vehicle or engine family using an FEL (as described in § 535.6) below the fuel consumption standard (as described in § 535.5) and choose not to generate conventional fuel consumption credits for that family. Manufacturers do not need to calculate fuel consumption credits for those families and do not need to submit or keep the associated records described in § 535.8 for these families. Manufacturers participating in NHTSA's FCC program must provide reports as specified in § 535.8.

(3) *Banking.* Banking is the retention of surplus FCC in an averaging set by the manufacturer for use in future model years for the purpose of averaging or trading.

(i) Surplus credits may be banked by the manufacturer for use in future model years, or traded, given the restriction that the credits have an expiration date of five model years after the year in which the credits are generated. For example, banked credits earned in model year 2014 may be utilized through model year 2019.

Surplus credits will become banked credits unless a manufacturer contacts NHTSA to expire its credits.

(ii) Surplus credits become earned or usable banked FCCs when the manufacturer's final report is approved by both agencies. However, the agencies may revoke these FCCs at any time if they are unable to verify them after reviewing the manufacturer's reports or auditing its records.

(iii) Banked FCC retain the designation from the averaging set and model year in which they were generated.

(iv) Banked credits retain the designation of the averaging set in which they were generated.

(v) Trailer manufacturers generating credits in paragraph (e) of this section may not bank credits except to resolve

credit deficits in the same model year or from up to three prior model years.

(4) *Trading.* Trading is a transaction that transfers banked FCCs between manufacturers or other entities in the same averaging set. A manufacturer may use traded FCCs for averaging, banking, or further trading transactions.

(i) Manufacturers may only trade banked credits to other manufacturers with vehicle or engines in the same averaging set. Traded FCCs, other than advanced technology credits, may be used only within the averaging set in which they were generated.

Manufacturers may only trade credits to other entities for the purpose of expiring credits.

(ii) Advanced technology credits can be traded across different averaging sets.

(iii) The agencies may revoke traded FCCs at any time if they are unable to verify them after reviewing the manufacturer's reports or auditing its records.

(iv) If a negative FCC balance results from a transaction, both the buyer and seller are liable, except in cases the agencies deem to involve fraud. See § 535.9 for cases involving fraud. EPA also may void the certificates of all vehicle families participating in a trade that results in a manufacturer having a negative balance of emission credits. See 40 CFR 1037.745.

(v) Trailer manufacturers generating credits in paragraph (e) of this section may not trade credits.

(5) *Credit deficit (or credit shortfall).*

A credit shortfall or deficit occurs when the sum of the manufacturer's generated credits for engines or vehicle families or fleets within an averaging set is negative. Credit shortfalls must be offset by an available credit surplus within three model years after the shortfall was incurred. If the shortfall cannot be offset, the manufacturer is liable for civil penalties as discussed in § 535.9.

(6) *FCC transaction plan.* In order to provide the maximum flexibility to a manufacturer, during the model year and before the due date for its final report, an FCC transaction plan must be submitted to the agencies as specified in § 535.8 anytime a manufacturer wants to execute a credit transaction involving banked or trading credits. For example, if a manufacturer executes a plan to apply banked credits over multiple subsequent model years.

(7) *Revoked credits.* NHTSA may revoke fuel consumption credits if unable to verify any information after auditing reports or records or conducting conformity testing. In the cases where EPA revokes emissions CO<sub>2</sub> credits, NHTSA will revoke the same amount of fuel consumption credits.

(b) *ABT provisions for heavy-duty pickup trucks and vans.* (1) Calculate fuel consumption credits in a model year for one fleet of conventional heavy-duty pickup trucks and vans and if designated by the manufacturer another consisting of advance technology vehicles for the averaging set as defined in § 535.4. Calculate credits for each fleet separately using the following equation:

$$\text{Total MY Fleet FCC (gallons)} = (\text{Std} - \text{Act}) \times (\text{Volume}) \times (\text{UL}) \times (10^2)$$

Std = Fleet average fuel consumption standard (gal/100 mile).

Act = Fleet average actual fuel consumption value (gal/100 mile).

Volume = the total U.S.-directed production of vehicles in the regulatory subcategory.

UL = the useful life for the regulatory subcategory. The useful life value for heavy-pickup trucks and vans manufactured for model years 2013 through 2020 is equal to the 120,000 miles. The useful life for model years 2021 and later is equal to 150,000 miles.

(2) Adjust the fuel consumption performance of subconfigurations with advanced technology for determining the fleet average actual fuel consumption value as specified in paragraph (f)(1) of this section and 40 CFR 86.1819–14(d)(7). Advanced technology vehicles can be separated in a different fleet for the purpose of applying credit incentives as described in paragraph (f)(1) of this section.

(3) Adjust the fuel consumption performance for subconfigurations with innovative technology. A manufacturer is eligible to increase the fuel consumption performance of heavy-duty pickup trucks and vans in accordance with procedures established by EPA set forth in 40 CFR part 600. The eligibility of a manufacturer to increase its fuel consumption performance through use of an off-cycle technology requires an application request made to EPA and NHTSA in accordance with 40 CFR 86.1869–12 and an approval granted by the agencies. For off-cycle technologies that are covered under 40 CFR 86.1869–12, NHTSA will collaborate with EPA regarding NHTSA's evaluation of the specific off-cycle technology to ensure its impact on fuel consumption and the suitability of using the off-cycle technology to adjust fuel consumption performance. NHTSA will provide its views on the suitability of the technology for that purpose to EPA. NHTSA will apply the criteria in section (f) of this section in granting or denying off-cycle requests.

(4) Fuel consumption credits may be generated for vehicles certified in model year 2013 to the model year 2014

standards in § 535.5(a). If a manufacturer chooses to generate CO<sub>2</sub> emission credits under EPA's provisions in 40 CFR part 86, it may also voluntarily generate early credits under the NHTSA fuel consumption program. To do so, a manufacturer must certify its entire U.S.-directed production volume of vehicles in its fleet. The same production volume restrictions specified in 40 CFR 1037.150(a)(2) relating to when test groups are certified apply to the NHTSA early credit provisions. Credits are calculated as specified in paragraph (b)(3) of this section relative to the fleet standard that would apply for model year 2014 using the model year 2013 production volumes. Surplus credits generated under this paragraph (b)(4) are available for banking or trading. Credit deficits for an averaging set prior to model year 2014 do not carry over to model year 2014. These credits may be used to show compliance with the standards of this part for 2014 and later model years. Once a manufacturer opts into the NHTSA program they must stay in the program for all of the optional model years and remain standardized with the same implementation approach being followed to meet the EPA CO<sub>2</sub> emission program.

(5) Calculate the averaging set credit value by summing together the fleet credits for conventional and advanced technology vehicles including any adjustments for innovative technologies. Manufacturers may sum conventional and innovative technology credits before adding any advanced technology credits in each averaging set.

(6) Credit adjustment for useful life. For credits that manufacturers calculate based on a useful life of 120,000 miles, multiply any banked credits carried forward for use in model year 2021 and later by 1.25. For credit deficits that you calculate based on a useful life of 120,000 miles and that you offset with credits originally earned in model year 2021 and later, multiply the credit deficit by 1.25.

(c) *ABT provisions for vocational vehicles and tractors.* (1) Calculate the fuel consumption credits in a model year for each participating family or subfamily consisting of conventional vehicles in each averaging set (as defined in § 535.4) using the equation in this section. Each designated vehicle family or subfamily has a “family emissions limit” (FEL) that is compared to the associated regulatory subcategory standard. An FEL that falls below the regulatory subcategory standard creates “positive credits,” while fuel consumption level of a family group above the standard creates a “negative

credits.” The value of credits generated for each family or subfamily in a model year is calculated as follows:

$$\text{Vehicle Family FCC (gallons)} = (\text{Std} - \text{FEL}) \times (\text{Payload}) \times (\text{Volume}) \times (\text{UL}) \times (10^3)$$

Where:

Std = the standard for the respective vehicle family regulatory subcategory (gal/1000 ton-mile).

FEL = family emissions limit for the vehicle family (gal/1000 ton-mile).

Payload = the prescribed payload in tons for each regulatory subcategory as shown in the following table:

Regulatory subcategory	Payload (tons)
LHD Vocational Vehicles .....	2.85
MHD Vocational Vehicles .....	5.60
HHD Vocational Vehicles .....	7.5
Class 7 Tractor .....	12.50
Class 8 Tractor .....	19.00

Volume = the number of U.S.-directed production volume of vehicles in the corresponding vehicle family.

UL = the useful life for the regulatory subcategory (miles) as shown in the following table:

Regulatory subcategory	UL (miles)
LHD Vocational Vehicles .....	110,000 (Phase 1), 150,000 (Phase 2).
MHD Vocational Vehicles .....	185,000.
HHD Vocational Vehicles .....	435,000.
Class 7 Tractor .....	185,000.
Class 8 Tractor .....	435,000.

(i) Calculate the value of credits generated in a model year for each family or subfamily consisting of vehicles with advanced technology vehicles in each averaging set using the equation above and the guidelines provided in paragraph (f)(1) of this section. Manufacturers may generate credits for advanced technology vehicles using incentives specified in paragraph (f)(1) of this section.

(ii) Calculate the value of credits generated in a model year for each family or subfamily consisting of vehicles with off-cycle technology vehicles in each averaging set using the equation above and the guidelines provided in paragraph (f)(2) of this section.

(2) Manufacturers must sum all negative and positive credits for each vehicle family within each applicable averaging set to obtain the total credit balance for the model year before rounding. The sum of fuel consumptions credits must be rounded to the nearest gallon. Calculate the total

credits generated in a model year for each averaging set using the following equation:

Total averaging set MY credits =  $\Sigma$   
Vehicle family credits within each averaging set

(3) Manufacturers can sum conventional and innovative technology credits before adding any advanced technology credits in each averaging set.

(4) If a manufacturer chooses to generate CO<sub>2</sub> emission credits under EPA provisions of 40 CFR 1037.150(a), it may also voluntarily generate early credits under the NHTSA fuel consumption program as follows:

(i) Fuel consumption credits may be generated for vehicles certified in model year 2013 to the model year 2014 standards in § 535.5(b) and (c). To do so, a manufacturer must certify its entire U.S.-directed production volume of vehicles. The same production volume restrictions specified in 40 CFR 1037.150(a)(1) relating to when test groups are certified apply to the NHTSA early credit provisions. Credits are calculated as specified in paragraph (c)(11) of this section relative to the standards that would apply for model year 2014. Surplus credits generated under this paragraph (c)(4) may be increased by a factor of 1.5 for determining total available credits for banking or trading. For example, if you have 10 gallons of surplus credits for model year 2013, you may bank 15 gallons of credits. Credit deficits for an averaging set prior to model year 2014 do not carry over to model year 2014. These credits may be used to show compliance with the standards of this part for 2014 and later model years. Once a manufacturer opts into the NHTSA program they must stay in the program for all of the optional model years and remain standardized with the same implementation approach being followed to meet the EPA CO<sub>2</sub> emission program.

(ii) A tractor manufacturer may generate fuel consumption credits for the number of additional SmartWay designated tractors (relative to its MY 2012 production), provided that credits are not generated for those vehicles under paragraph (c)(4)(i) of this section. Calculate credits for each regulatory sub-category relative to the standard that would apply in model year 2014 using the equations in paragraph (c)(2) of this section. Use a production volume equal to the number of verified model year 2013 SmartWay tractors minus the number of verified model year 2012 SmartWay tractors. A manufacturer may bank credits equal to the surplus credits generated under this paragraph

multiplied by 1.50. A manufacturer's 2012 and 2013 model years must be equivalent in length. Once a manufacturer opts into the NHTSA program they must stay in the program for all of the optional model years and remain standardized with the same implementation approach being followed to meet the EPA CO<sub>2</sub> emission program.

(5) If a manufacturer generates credits from vehicles certified for advanced technology in accordance with paragraph (e)(1) of this section, a multiplier of 1.5 can be used, but this multiplier cannot be used on the same credits for which the early credit multiplier is used.

(d) *ABT provisions for heavy-duty engines.* (1) Calculate the fuel consumption credits in a model year for each participating family or subfamily consisting of engines in each averaging set (as defined in § 535.4) using the equation in this section. Each designated engine family has a "family certification level" (FCL) which is compared to the associated regulatory subcategory standard. A FCL that falls below the regulatory subcategory standard creates "positive credits," while fuel consumption level of a family group above the standard creates a "credit shortfall." The value of credits generated in a model year for each engine family or subfamily is calculated as follows:

$$\text{Engine Family FCC (gallons)} = (\text{Std} - \text{FCL}) \times (\text{CF}) \times (\text{Volume}) \times (\text{UL}) \times (10^2)$$

Where:

Std = the standard for the respective engine regulatory subcategory (gal/100 hp-hr).

FCL = family certification level for the engine family (gal/100 hp-hr).

CF = a transient cycle conversion factor in hp-hr/mile which is the integrated total cycle horsepower-hour divided by the equivalent mileage of the applicable test cycle. For spark-ignition heavy-duty engines, the equivalent mileage is 6.3 miles. For compression-ignition heavy-duty engines, the equivalent mileage is 6.5 miles.

Volume = the number of engines in the corresponding engine family.

UL = the useful life of the given engine family (miles) as shown in the following table:

Regulatory subcategory	UL (miles)
Class 2b-5 Vocational Vehicles, Spark Ignited (SI), and Light Heavy-Duty Diesel Engines.	110,000 (Phase 1), 150,000 (Phase 2).
Class 6-7 Vocational Vehicles and Medium Heavy-Duty Diesel Engines.	185,000.

Regulatory subcategory	UL (miles)
Class 8 Vocational Vehicles and Heavy Heavy-Duty Diesel Engines.	435,000.
Class 7 Tractors and Medium Heavy-Duty Diesel Engines.	185,000.
Class 8 Tractors and Heavy Heavy-Duty Diesel Engines.	435,000.

(i) Calculate the value of credits generated in a model year for each family or subfamily consisting of engines with advanced technology vehicles in each averaging set using the equation above and the guidelines provided in paragraph (f)(1) of this section. Manufacturers may generate credits for advanced technology vehicles using incentives specified in paragraph (f)(1) of this section.

(ii) Calculate the value of credits generated in a model year for each family or subfamily consisting of engines with off-cycle technology vehicles in each averaging set using the equation above and the guidelines provided in paragraph (f)(2) of this section.

(2) Manufacturers shall sum all negative and positive credits for each engine family within the applicable averaging set to obtain the total credit balance for the model year before rounding. The sum of fuel consumptions credits should be rounded to the nearest gallon. Calculate the total credits generated in a model year for each averaging set using the following equation:

Total averaging set MY credits =  $\Sigma$   
Engine family credits within each averaging set

(3) The provisions of this section apply to manufacturers utilizing the compression-ignition engine voluntary alternate standard provisions specified in § 535.5(d)(4) as follows:

(i) Manufacturers may not certify engines to the alternate standards if they are part of an averaging set in which they carry a balance of banked credits. For purposes of this section, manufacturers are deemed to carry credits in an averaging set if they carry credits from advance technology that are allowed to be used in that averaging set.

(ii) Manufacturers may not bank fuel consumption credits for any engine family in the same averaging set and model year in which it certifies engines to the alternate standards. This means a manufacturer may not bank advanced technology credits in a model year it certifies any engines to the alternate standards.

(iii) Note that the provisions of paragraph (a) of this section apply with

respect to credit deficits generated while utilizing alternate standards.

(4) Where a manufacturer has chosen to comply with the EPA alternative compression ignition engine phase-in standard provisions in 40 CFR 1036.150(e), and has optionally decided to follow the same path under the NHTSA fuel consumption program, it must certify all of its model year 2013 compression-ignition engines within a given averaging set to the applicable alternative standards in § 535.5(d)(5). Engines certified to these standards are not eligible for early credits under paragraph (d)(5) of this section. Credits are calculated using the same equation provided in paragraph (d)(1) of this section.

(5) If a manufacturer chooses to generate early CO<sub>2</sub> emission credits under EPA provisions of 40 CFR 1036.150, it may also voluntarily generate early credits under the NHTSA fuel consumption program. Fuel consumption credits may be generated for engines certified in model year 2013 (2015 for spark-ignition engines) to the standards in § 535.5(d). To do so, a manufacturer must certify its entire U.S.-directed production volume of engines except as specified in 40 CFR 1036.150(a)(2). Credits are calculated as specified in paragraph (d)(1) of this section relative to the standards that would apply for model year 2014 (2016 for spark-ignition engines). Surplus credits generated under this paragraph (d)(3) may be increased by a factor of 1.5 for determining total available credits for banking or trading. For example, if you have 10 gallons of surplus credits for model year 2013, you may bank 15 gallons of credits. Credit deficits for an averaging set prior to model year 2014 (2016 for spark-ignition engines) do not carry over to model year 2014 (2016 for spark-ignition engines). These credits may be used to show compliance with the standards of this part for 2014 and later model years. Once a manufacturer opts into the NHTSA program they must stay in the program for all of the optional model years and remain standardized with the same implementation approach being followed to meet the EPA CO<sub>2</sub> emission program.

(e) *ABT provisions for trailers.* (1) Manufacturers can not use averaging for non-box trailers, partial-aero trailers, or non-aero trailers and can not use fuel consumption credits for banking or trading for any trailers. Full aero box trailer manufactures may average credits but cannot bank credits except to resolve deficits in future model years.

(2) Calculate the fuel consumption credits in a model year for each

participating family or subfamily consisting of full aero box trailers (vehicles) in each averaging set (as defined in § 535.4) using the equation in this section. Each designated vehicle family or subfamily has a “family emissions limit” (FEL) which is compared to the associated regulatory subcategory standard. An FEL that falls below the regulatory subcategory standard creates “positive credits,” while fuel consumption level of a family group above the standard creates a “negative credits.” The value of credits generated for each family or subfamily in a model year is calculated as follows: Vehicle Family FCC (gallons) =  $(\text{Std} - \text{FEL}) \times (\text{Payload}) \times (\text{Volume}) \times (\text{UL}) \times (10^3)$

Where:

Std = the standard for the respective vehicle family regulatory subcategory (gal/1000 ton-mile).

FEL = family emissions limit for the vehicle family (gal/1000 ton-mile).

Payload = 19 tons.

Volume = the number of U.S.-directed production volume of vehicles in the corresponding vehicle family.

UL = the useful life for the regulatory subcategory. The useful life value for heavy-duty trailers is equal to the 250,000 miles.

(3) Trailer manufacturers may not generate advanced or innovative technology credits.

(4) Manufacturers shall sum all negative and positive credits for each vehicle family within the applicable averaging set to obtain the total credit balance for the model year before rounding. The sum of fuel consumptions credits should be rounded to the nearest gallon.

Calculate the total credits generated in a model year for each averaging set using the following equation:

Total averaging set MY credits =  $\Sigma$  Vehicle family credits within each averaging set

(5) Trailer manufacturers may not generate a credit surplus within an averaging set for the purpose of banking except to offset a credit deficit from a prior model year.

(f) *Additional credit provisions.* (1) *Advanced technology credits.*

Manufacturers of heavy-duty pickup trucks and vans, vocational vehicles, tractors and the associated engines showing improvements in CO<sub>2</sub> emissions and fuel consumption using hybrid vehicles with regenerative braking, vehicles equipped with Rankine-cycle engines, electric vehicles and fuel cell vehicles are eligible for advanced technology credits. Manufacturers shall use sound engineering judgment to determine the

performance of the vehicle or engine with advanced technology. Advanced technology credits for vehicles or engines complying with Phase 1 standards may be increased by a 1.5 multiplier for Phase 2. Manufacturers may not apply this multiplier in addition to any early-credit multipliers. The maximum amount of credits a manufacturer may bring into the service class group that contains the heavy-duty pickup and van averaging set is 5.89·10<sup>6</sup> gallons (for advanced technology credits based upon compression ignition engines) or 6.76·10<sup>6</sup> gallons (for advanced technology credits based upon spark-ignition engines) per model year as specified in 40 CFR part 86 for heavy-duty pickup trucks and vans, 40 CFR 1036.740 for engines and 40 CFR 1037.740 for tractors and vocational vehicles. The specified limit does not cap the amount of advanced technology credits that can be used across averaging sets within the same service class group. Advanced technology credits can be used to offset negative credits in the same averaging set or other averaging sets. A manufacturer must first apply advanced technology credits to any deficits in the same averaging set before applying them to other averaging.

(i) *Heavy-duty pickup trucks and vans.* For advanced technology systems (hybrid vehicles with regenerative braking, vehicles equipped with Rankine-cycle engines and fuel cell vehicles), calculate fleet-average performance rates consistent with good engineering judgment and the provisions of 40 CFR 86.1819–14 and 40 CFR 86.1865.

(ii) *Tractors and vocational vehicles.* For advanced technology system (hybrid vehicles with regenerative braking, vehicles equipped with Rankine-cycle engines and fuel cell vehicles), calculate the advanced technology credits as follows:

(A) Measure the effectiveness of the advanced system by conducting A to B testing a vehicle equipped with the advanced system and an equivalent conventional system in accordance with 40 CFR 1037.615.

(B) For purposes of this paragraph (e), a conventional vehicle is considered to be equivalent if it has the same footprint, intended vehicle service class, aerodynamic drag, and other relevant factors not directly related to the advanced system powertrain. If there is no equivalent vehicle, the manufacturer may create and test a prototype equivalent vehicle. The conventional vehicle is considered Vehicle A, and the advanced technology vehicle is considered Vehicle B.

(C) The benefit associated with the advanced system for fuel consumption is determined from the weighted fuel consumption results from the chassis tests of each vehicle using the following equation:

$$\text{Benefit (gallon/1000 ton mile)} = \text{Improvement Factor} \times \text{GEM Fuel Consumption Result}_B$$

Where:

$$\text{Improvement Factor} = (\text{Fuel Consumption}_A - \text{Fuel Consumption}_B) / (\text{Fuel Consumption}_A)$$

Fuel Consumption Rates A and B are the gallons per 1000 ton-mile of the conventional and advanced vehicles, respectively as measured under the test procedures specified by EPA.

GEM Fuel Consumption Result B is the estimated gallons per 1000 ton-mile rate resulting from emission modeling of the advanced vehicle as specified in 40 CFR 1037.520 and § 535.6(b).

(D) Calculate the benefit in credits using the equation in paragraph (c) of this section and replacing the term (Std-FEL) with the benefit.

(E) For electric vehicles calculate the fuel consumption credits using an FEL of 0 g/1000ton-mile.

(iii) *Heavy-duty engines.* (A) This section specifies how to generate advanced technology-specific fuel consumption credits for hybrid powertrains that include energy storage systems and regenerative braking (including regenerative engine braking) and for engines that include Rankine-cycle (or other bottoming cycle) exhaust energy recovery systems.

(1) Pre-transmission hybrid powertrains are those engine systems that include features that recover and store energy during engine motoring operation but not from the vehicle wheels. These powertrains are tested using the hybrid engine test procedures of 40 CFR part 1065 or using the post-transmission test procedures.

(2) Post-transmission hybrid powertrains are those powertrains that include features that recover and store energy from braking at the vehicle wheels. These powertrains are tested by simulating the chassis test procedure applicable for hybrid vehicles under 40 CFR 1037.550.

(3) Test engines that include Rankine-cycle exhaust energy recovery systems according to the test procedures specified in 40 CFR part 1036, subpart F, unless EPA approves the manufacturer's alternate procedures.

(B) Calculate credits as specified in paragraph (c) of this section. Credits generated from engines and powertrains certified under this section may be used in other averaging sets as described in 40 CFR 1036.740(d).

(2) *Innovative and off-cycle technology credits.* This provision allows fuel saving innovative and off-cycle engine and vehicle technologies to generate fuel consumption credits comparable to CO<sub>2</sub> emission credits consistent with the provisions of 40 CFR 1036.610 (for engines), 40 CFR part 86 (for heavy-duty pickup trucks and vans) and 40 CFR 1037.610 (for vocational vehicles and tractors).

(i) For model years 2013 through 2020, manufacturers may generate innovative technology credits for introducing technologies that were not in-common use for heavy-duty vehicles or engines before model year 2010 and that are not reflected in the EPA specified test procedures. Upon identification and joint approval with EPA, NHTSA will allow equivalent fuel consumption credits into its program to those allowed by EPA for manufacturers seeking to obtain innovative technology credits in a given model year. Such credits must remain within the same regulatory subcategory in which the credits were generated. NHTSA will adopt fuel consumption credits depending upon whether—

(A) The technology has a direct impact upon reducing fuel consumption performance; and

(B) The manufacturer has provided sufficient information to make sound engineering judgments on the impact of the technology in reducing fuel consumption performance.

(ii) For model years 2021 and later, manufacturers may generate off-cycle technology credits for introducing technologies that are not reflected in the EPA specified test procedures. Upon identification and joint approval with EPA, NHTSA will allow equivalent fuel consumption credits into its program to those allowed by EPA for manufacturers seeking to obtain innovative technology credits in a given model year. Such credits must remain within the same regulatory subcategory in which the credits were generated. NHTSA will adopt fuel consumption credits depending upon whether—

(A) The technology meets paragraph (f)(2)(i)(A) and (B) of this section.

(B) For heavy-duty pickup trucks and vans, manufacturers using the 5-cycle test to quantify the benefit of a technology are not required to obtain approval from the agencies to generate results.

(iii) The following provisions apply to all innovative and off-cycle technologies:

(A) Technologies found to be defective, or identified as a part of NHTSA's safety defects program, and technologies that are not performing as

intended will have the values of approved off-cycle credits removed from the manufacturer's credit balance.

(B) Approval granted for innovative and off-cycle technology credits under NHTSA's fuel efficiency program does not affect or relieve the obligation to comply with the Vehicle Safety Act (49 U.S.C. Chapter 301), including the "make inoperative" prohibition (49 U.S.C. 30122), and all applicable Federal motor vehicle safety standards issued thereunder (FMVSSs) (49 CFR part 571). In order to generate off-cycle or innovative technology credits manufacturers must state—

(1) That each vehicle equipped with the technology for which they are seeking credits will comply with all applicable FMVSS(s); and

(2) Whether or not the technology has a fail-safe provision. If no fail-safe provision exists, the manufacturer must explain why not and whether a failure of the innovative technology would affect the safety of the vehicle.

(C) Manufacturers requesting approval for innovative technology credits are required to provide documentation in accordance with 40 CFR 86.1869–12, 1036.610, and 1037.610.

(D) Credits will be accepted on a one-for-one basis expressed in terms of gallons in comparison to those approved by EPA.

(E) For the heavy-duty pickup trucks and vans, the average fuel consumption will be calculated as a separate credit amount (rounded to the nearest whole number) using the following equation:

$$\text{Off-cycle FC credits} = (\text{CO}_2 \text{ Credit/CF}) \times 100 \times \text{Production} \times \text{VLM}$$

Where:

CO<sub>2</sub> Credits = the credit value in grams per mile determined in 40 CFR 86.1869–12(c)(3), (d)(1), (d)(2) or (d)(3).

CF = conversion factor, which for spark ignition engines is 8,887 and for compression ignition engines is 10,180. Production = the total production volume for the applicable category of vehicles VLM = vehicle lifetime miles, which for 2b-3 vehicles shall be 150,000 for the Phase 2 program.

(F) NHTSA will not approve innovative technology credits for technology that is related to crash-avoidance technologies, safety critical systems or systems affecting safety-critical functions, or technologies designed for the purpose of reducing the frequency of vehicle crashes.

(iv) Manufacturers may carryover an approved innovative technology into the Phase 2 off-cycle credit program. Manufacturers may continue to carryover the improvement factor (not the credit value) if—

(A) The FEL is generated by GEM or 5-cycle testing;

(B) The technology is not changed or paired with any other off-cycle technology;

(C) The improvement factor only applies to approved vehicle or engine families;

(D) The agencies do not expect the technology to be incorporated into GEM at any point during the Phase 2 program; and

(E) The documentation to carryover credits that would primarily justify the difference in fuel efficiency between real world and compliance protocols is the same for both Phase 1 and Phase 2 compliance protocols. The agencies must approve the justification. If the agencies do not approve the justification, the manufacturer must recertify.

#### **§ 535.8 Reporting and recordkeeping requirements.**

##### *(a) General requirements.*

Manufacturers producing heavy-duty vehicles and engines applicable to fuel consumption standards in § 535.5, for each given model year, must submit the required information as specified in paragraphs (b) through (h) of this section.

(1) The information required by this part must be submitted by the deadlines specified in this section and must be based upon all the information and data available to the manufacturer 30 days before submitting information.

(2) Manufacturers must submit information electronically through the EPA database system as the single point of entry for all information required for this national program and both agencies will have access to the information. The format for the required information is specified by EPA in coordination with NHTSA.

(3) Manufacturers providing incomplete reports missing any of the required information or providing untimely reports are considered as not complying with standards (*i.e.*, if good-faith estimates of U.S.-directed production volumes for EPA certificates of conformity are not provided) and are liable to pay civil penalties in accordance with 49 U.S.C. 32912.

(4) Manufacturers certifying a vehicle or engine family using an FEL or FCL below the applicable fuel consumption standard as described in § 535.5 may choose not to generate fuel consumption credits for that family. In which case, the manufacturer is not required to submit reporting or keep the associated records described in this part for that family.

(5) Manufacturers must use good engineering judgment and provide comparable fuel consumption information to that of the information or data provided to EPA under 40 CFR 86.1865, 1036.250, 1036.730, 1036.825 1037.250, 1037.730, and 1037.825.

(6) Any information that must be sent directly to NHTSA. In instances in which EPA has not created an electronic pathway to receive the information, the information should be sent through an electronic portal identified by NHTSA or through the NHTSA CAFE database (*i.e.*, information on fuel consumption credit transactions). If hardcopy documents must be sent, the information should be sent to the Associate Administrator of Enforcement at 1200 New Jersey Avenue, NVS-200, Office W45-306, SW., Washington, DC 20590.

##### *(b) Pre-model year reports.*

Manufacturers producing heavy-duty pickup trucks and vans must submit reports in advance of the model year providing early estimates demonstrating how their fleet(s) would comply with GHG emissions and fuel consumption standards. Note, the agencies understand that early model year reports contain estimates that may change over the course of a model year and that compliance information manufacturers submit prior to the beginning of a new model year may not represent the final compliance outcome. The agencies view the necessity for requiring early model reports as a manufacturer's good faith projection for demonstrating compliance with emission and fuel consumption standards.

(1) *Report deadlines.* For model years 2013 and later, manufacturer of heavy-duty pickup trucks and vans complying with voluntary and mandatory standards must submit a pre-model year report for the given model year as early as the date of the manufacturer's annual certification preview meeting with EPA and NHTSA, or prior to submitting its first application for a certificate of conformity to EPA in accordance with 40 CFR 86.1819-14 (d). For example, a manufacturer choosing to comply in model year 2014 could submit its pre-model year report during its precertification meeting which could occur before January 2, 2013, or could provide its pre-model year report any time prior to submitting its first application for certification for the given model year.

(2) *Contents.* Each pre-model year report must be submitted including the following information for each model year.

(i) A list of each unique subconfiguration in the manufacturer's fleet describing the make and model designations, attribute based-values (*i.e.*, GVWR, GCWR, Curb Weight and drive configurations) and standards;

(ii) The emission and fuel consumption fleet average standard derived from the unique vehicle configurations;

(iii) The estimated vehicle configuration, test group and fleet production volumes;

(iv) The expected emissions and fuel consumption test group results and fleet average performance;

(v) If complying with MY 2013 fuel consumption standards, a statement must be provided declaring that the manufacturer is voluntarily choosing to comply early with the EPA and NHTSA programs. The manufacturers must also acknowledge that once selected, the decision cannot be reversed and the manufacturer will continue to comply with the fuel consumption standards for subsequent model years for all the vehicles it manufacturers in each regulatory category for a given model year;

(vi) If complying with MYs 2014, 2015 or 2016 fuel consumption standards, a statement must be provided declaring whether the manufacturer will use fixed or increasing standards in accordance with § 535.5(a). The manufacturer must also acknowledge that once selected, the decision cannot be reversed and the manufacturer must continue to comply with the same alternative for subsequent model years for all the vehicles it manufacturers in each regulatory category for a given model year;

(vii) If complying with MYs 2014 or 2015 fuel consumption standards, a statement must be provided declaring that the manufacturer is voluntarily choosing to comply with NHTSA's voluntary fuel consumption standards in accordance with § 535.5(a)(4). The manufacturers must also acknowledge that once selected, the decision cannot be reversed and the manufacturer will continue to comply with the fuel consumption standards for subsequent model years for all the vehicles it manufacturers in each regulatory category for a given model year;

(viii) The list of Class 2b and 3 incomplete vehicles (cab-complete or chassis complete vehicles) and the method used to certify these vehicles as complete pickups and vans identifying the most similar complete sister- or other complete vehicles used to derive the target standards and performance test results;



(ix) The list of Class 4 and 5 incomplete and complete vehicles and the method use to certify these vehicles as complete pickups and vans identifying the most similar complete or sister vehicles used to derive the target standards and performance test results;

(x) List of loose engines included in the heavy-duty pickup and van category and the list of vehicles used to derive target standards and performance test results;

(xi) Copy of any notices a vehicle manufacturer sends to the engine manufacturer to notify the engine manufacturers that their engines are subject to emissions and fuel consumption standards and that it intends to use their engines in excluded vehicles;

(xii) A credit plan identifying the manufacturers estimated credit balances, planned credit flexibilities (*i.e.*, credit balances, planned credit trading, innovative, advanced and early credits and etc.) and if needed a credit deficit plan demonstrating how it plans to resolve any credit deficits that might occur for a model year within a period of up to three model years after that deficit has occurred; and

(xiii) The supplemental information specified in paragraph (h) of this section. [Note: NHTSA may also ask a manufacturer to provide additional information if necessary to verify compliance with the fuel consumption requirements of this regulation.]

(c) *Applications for certificate of conformity.* Manufacturers producing vocational vehicles, tractors and heavy-duty engines are required to submit applications for certificates of conformity to EPA in accordance with 40 CFR 1036.205 and 1037.205 in advance of introducing vehicles for commercial sale. Applications contain early model year information demonstrating how manufacturers plan to comply with GHG emissions. For model years 2013 and later, manufacturers of vocational vehicles, tractors and engine complying with NHTSA's voluntary and mandatory standards must submit applications for certificates of conformity in accordance through the EPA database including both GHG emissions and fuel consumption information for each given model year.

(1) *Submission deadlines.* Applications are primarily submitted in advance of the given model year to EPA but cannot be submitted any later than December 31 of the given model year.

(2) *Contents.* Each application for certificates of conformity submitted to EPA must include the following equivalent fuel consumption.

(i) Equivalent fuel consumption values for emissions CO<sub>2</sub> FCLs values used to certify each engine family in accordance with 40 CFR 1036.205(e). This provision applies only to manufacturers producing heavy-duty engines.

(ii) Equivalent fuel consumption values for emission CO<sub>2</sub> data engines used to comply with emission standards in 40 CFR 1036.108. This provision applies only to manufacturers producing heavy-duty engines.

(iii) Equivalent fuel consumption values for emissions CO<sub>2</sub> FELs values used to certify each vehicle families or subfamilies in accordance with 40 CFR 1037.205(k). This provision applies only to manufacturers producing vocational vehicles and tractors.

(iv) Report modeling results for ten configurations in terms of CO<sub>2</sub> emissions and equivalent fuel consumption results in accordance with 40 CFR 1037.205(o). Include modeling inputs and detailed descriptions of how they were derived. This provision applies only to manufacturers producing vocational vehicles and tractors.

(3) *Additional supplemental information.* Manufacturers are required to submit additional information as specified in paragraph (h) of this section for the NHTSA program before or at the same time it submits its first application for a certificate of conformity to EPA. Under limited conditions, NHTSA may also ask a manufacturer to provide additional information directly to the Administrator if necessary to verify the fuel consumption requirements of this regulation.

(d) *Final reports.* Heavy-duty vehicle and engine manufacturers participating and not-participating in the ABT program are required to submit an end-of-the-year (EOY) report containing information for NHTSA as specified in paragraph (d)(2) of this section and in accordance with 40 CFR 86.1865, 1036.730, and 1037.730. The final reports are used to review a manufacturer's preliminary or final compliance information and to identify manufacturers that might have a credit deficit for the given model year. For model years 2013 and later, heavy-duty vehicle and engine manufacturers complying with NHTSA's voluntary and mandatory standards must submit final reports through the EPA database including both GHG emissions and fuel consumption information for each given model year.

(1) *Report deadlines.* For model year 2013 and later, heavy-duty vehicle and engine manufacturers complying with NHTSA voluntary and mandatory

standards must submit EOY reports through the EPA database including both GHG emissions and fuel consumption information within 90 days after the end of the given model year and no later than April 1 of the next calendar year. For example, the final report for model year 2014 must be submitted no later than April 1, 2015. A manufacturer may ask NHTSA and EPA to extend the deadline of a final report by up to 30 days. A manufacturer unable to provide, and requesting to omit an emissions rate or fuel consumption value from a final report must obtain approval from the agencies prior to the submission deadline of its final report.

(i) If a manufacturer expects differences in the information reported between the EOY and the final year report specified in 40 CFR 1036.730 and 1037.730, it must provide the most up-to-date fuel consumption projections in its final report and identify the information as preliminary.

(ii) If the manufacturer cannot provide any of the required fuel consumption information, it must state the specific reason for the insufficiency and identify the additional testing needed or explain what analytical methods are believed by the manufacturer will be necessary to eliminate the insufficiency and certify that the results will be available for the final report.

(2) *Contents.* Each final report must be submitted including the following fuel consumption information for each model year. final reports for manufacturers participating in the ABT program must include final estimates.

(i) Engine and vehicle family designations and averaging sets.

(ii) Engine and vehicle regulatory subcategory and fuel consumption standards including any alternative standards used.

(iii) Engine and vehicle family FCLs and FELs in terms of fuel consumption.

(iv) Final production volumes for engines and vehicles.

(v) A final credit plan (for manufacturers participating in the ABT program) identifying the manufacturers actual fuel consumption credit balances, credit flexibilities, credit trades and a credit deficit plan if needed demonstrating how it plans to resolve any credit deficits that might occur for a model year within a period of up to three model years after that deficit has occurred.

(vi) A summary as specified in paragraph (g)(7) of this section describing the vocational vehicles and vocational tractors that were exempted as heavy-duty off-road vehicles. This applies to manufacturers participating



and not participating in the ABT program.

(vii) A summary describing any advanced or innovative technology engines or vehicles including alternative fueled vehicles that were produced for the model year identifying the approaches used to determinate compliance and the production volumes.

(viii) A list of each unique subconfiguration included in a manufacturer's fleet of heavy-duty pickup trucks and vans identifying the attribute based-values (GVWR, GCWR, Curb Weight, and drive configurations) and standards. This provision applies only to manufacturers producing heavy-duty pickup trucks and vans.

(ix) The fuel consumption fleet average standard derived from the unique vehicle configurations. This provision applies only to manufacturers producing heavy-duty pickup trucks and vans.

(x) The subconfiguration and test group production volumes. This provision applies only to manufacturers producing heavy-duty pickup trucks and vans.

(xi) The fuel consumption test group results and fleet average performance. This provision applies only to manufacturers producing heavy-duty pickup trucks and vans.

(xii) Under limited conditions, NHTSA may also ask a manufacturer to provide additional information directly to the Administrator if necessary to verify the fuel consumption requirements of this regulation.

(e) *Amendments to applications for certification.* At any time, a manufacturer modifies an application for certification in accordance with 40 CFR 1036.225 and 1037.225, it must submit GHG emissions changes with equivalent fuel consumption values for the information required in paragraphs (b) through (e) and (h) of this section.

(f) *Confidential information.* Manufacturers must submit a request for confidentiality with each electronic submission specifying any part of the for information or data in a report that it believes should be withheld from public disclosure as trade secret or other confidential business information. Information submitted to EPA should follow EPA guidelines for treatment of confidentiality. Requests for confidential treatment for information submitted to NHTSA must be filed in accordance with the requirements of 49 CFR part 512, including submission of a request for confidential treatment and the information for which confidential treatment is requested as specified by part 512. For any information or data

requested by the manufacturer to be withheld under 5 U.S.C. 552(b)(4) and 49 U.S.C. 32910(c), the manufacturer shall present arguments and provide evidence in its request for confidentiality demonstrating that—

(1) The item is within the scope of 5 U.S.C. 552(b)(4) and 49 U.S.C. 32910(c);

(2) The disclosure of the information at issue would cause significant competitive damage;

(3) The period during which the item must be withheld to avoid that damage; and

(4) How earlier disclosure would result in that damage.

(g) *Additional required information.* The following additional information is required to be submitted through the EPA database. NHTSA reserves the right to ask a manufacturer to provide additional information if necessary to verify the fuel consumption requirements of this regulation.

(1) *Small businesses.* For model years 2013 through 2020, vehicles and engines produced by small business manufacturers meeting the criteria in 13 CFR 121.201 are exempted from the requirements of this part. Qualifying small business manufacturers must notify EPA and NHTSA Administrators before importing or introducing into U.S. commerce exempted vehicles or engines. This notification must include a description of the manufacturer's qualification as a small business under 13 CFR 121.201. Manufacturers must submit this notification to EPA, and EPA will provide the notification to NHTSA. The agencies may review a manufacturer's qualification as a small business manufacturer under 13 CFR 121.201.

(2) *Emergency vehicles.* For model years 2021 and later, emergency vehicles produced by heavy-duty pickup truck and van manufacturers are exempted except those produced by manufacturers voluntarily complying with standards in § 535.5(a). Manufacturers must notify the agencies in writing if using the provisions in § 535.5(a) to produce exempted emergency vehicles in a given model year, either in the report specified in 40 CFR 86.1865 or in a separate submission.

(3) *Early introduction.* The provision applies to manufacturers seeking to comply early with the NHTSA's fuel consumption program prior to model year 2014. The manufacturer must send the request to EPA before submitting its first application for a certificate of conformity.

(4) *NHTSA voluntary compliance model years.* Manufacturers must submit a statement declaring whether

the manufacturer chooses to comply voluntarily with NHTSA's fuel consumption standards for model years 2014 through 2015. The manufacturers must acknowledge that once selected, the decision cannot be reversed and the manufacturer will continue to comply with the fuel consumption standards for subsequent model years. The manufacturer must send the statement to EPA before submitting its first application for a certificate of conformity.

(5) *Alternative engine standards.* Manufacturers choosing to comply with the alternative engine standards must notify EPA and NHTSA of their choice and include in that notification a demonstration that it has exhausted all available credits and credit opportunities. The manufacturer must send the statement to EPA before submitting its EOY report.

(6) *Alternate phase-in.* Manufacturers choosing to comply with the alternative engine phase-in must notify EPA and NHTSA of their choice. The manufacturer must send the statement to EPA before submitting its first application for a certificate of conformity.

(7) *Off-road exclusion (tractors, vocational vehicles and trailers only).* (i) Tractors and vocational vehicles intended to be used extensively in off-road environments such as forests, oil fields, and construction sites may be exempted without request from the requirements of this regulation as specified in 49 CFR 523.2 and § 535.5(b). Within 90 days after the end of each model year, manufacturers must send EPA and NHTSA through the EPA database a report with the following information:

(A) A description of each excluded vehicle configuration, including an explanation of why it qualifies for this exclusion.

(B) The number of vehicles excluded for each vehicle configuration.

(ii) A manufacturer having an off-road vehicle failing to meet the criteria under the agencies' off-road exclusions will be allowed to request an exclusion of such a vehicle from EPA and NHTSA. The approval will be granted through the certification process for the vehicle family and will be done in collaboration between EPA and NHTSA in accordance with the provisions in 40 CFR 1037.150, 1037.210, and 1037.630.

(8) *Vocational tractors.* Tractors intended to be used as vocational tractors may comply with vocational vehicle standards in § 535.5(b) of this regulation. Manufacturers classifying tractors as vocational tractors must provide a description of how they meet

the qualifications in their applications for certificates of conformity as specified in 40 CFR 1037.205.

(9) *Approval of alternate methods to determine drag coefficients (tractors only).* Manufacturers seeking to use alternative methods to determine aerodynamic drag coefficients must provide a request and gain approval by EPA in accordance with 40 CFR 1037.525. The manufacturer must send the request to EPA before submitting its first application for a certificate of conformity.

(10) *Innovative and off-cycle technology credits.* Manufacturers pursuing innovative and off-cycle technology credits must submit information to the agencies and may be subject to a public evaluation process in which the public would have opportunity for comment if the manufacturer is not using a test procedure in accordance with 40 CFR 1037.610(c). Whether the approach involves on-road testing, modeling, or some other analytical approach, the manufacturer would be required to present a final methodology to EPA and NHTSA. EPA and NHTSA would approve the methodology and credits only if certain criteria were met. Baseline emissions and fuel consumption and control emissions and fuel consumption would need to be clearly demonstrated over a wide range of real world driving conditions and over a sufficient number of vehicles to address issues of uncertainty with the data. Data would need to be on a vehicle model-specific basis unless a manufacturer demonstrated model-specific data was not necessary. The agencies may publish a notice of availability in the **Federal Register** notifying the public of a manufacturer's proposed alternative off-cycle credit calculation methodology and provide opportunity for comment. Any notice will include details regarding the methodology, but not include any Confidential Business Information.

(11) *Credit trades.* If a manufacturer trades fuel consumption credits, it must send EPA and NHTSA a fuel consumption credit plan as specified in § 535.7(a) and provide the following information within 90 days after the transaction:

(i) As the seller, the manufacturer must include the following information in its report:

(A) The corporate names of the buyer and any brokers.

(B) A copy of any contracts related to the trade.

(C) The fleet, vehicle or engine families that generated fuel consumption credits for the trade,

including the number of fuel consumption credits from each family.

(ii) As the buyer, the manufacturer or entity must include the following information in its report:

(A) The corporate names of the seller and any brokers.

(B) A copy of any contracts related to the trade.

(C) How the manufacturer or entity intends to use the fuel consumption credits, including the number of fuel consumption credits it intends to apply to each vehicle family (if known).

(D) A copy of the contract with signatures from both the buyer and the seller.

(12) *Production reports.* Within 90 days after the end of the model year, manufacturers must send to EPA a report including the total U.S.-directed production volume of vehicles it produced in each vehicle and engine family during the model year (based on information available at the time of the report) as required by 40 CFR 1036.250 and 40 CFR 1037.250. Each manufacturer shall report by vehicle or engine identification number and by configuration and identify the subfamily identifier. Report uncertified vehicles sold to secondary vehicle manufacturers. Small business manufacturers may omit reporting. Identify any differences between volumes included for EPA but excluded for NHTSA.

(h) *Public information.* Based upon information submitted by manufacturers and EPA, NHTSA will publish fuel consumption standards and performance results.

(i) *Information received from EPA.* NHTSA will receive information from EPA as specified in 40 CFR 1036.755 and 1037.755.

(j) *Recordkeeping.* NHTSA has the same recordkeeping requirements as EPA, specified in 40 CFR 86.1865–12(k), 1036.250, 1036.735, 1036.825, 1037.250, 1037.735, and 1037.825. The agencies each reserve the right to request information contained in records separately. If collected separately and NHTSA finds that information is provided fraudulent or grossly negligent or otherwise provided in bad faith, the manufacturer may be liable to civil penalties in accordance with each agencies authority.

#### **§ 535.9 Enforcement approach.**

(a) *Compliance.* (1) Each year NHTSA will assess compliance with fuel consumption standards as specified in § 535.10.

(i) NHTSA may conduct audits or verification testing prior to first sale throughout a given model year or after

the model year in order to validate data received from manufacturers and will discuss any potential issues with EPA and the manufacturer. Audits may periodically be performed to confirm manufacturers credit balances or other credit transactions.

(ii) NHTSA may also conduct field inspections either at manufacturing plants or at new vehicle dealerships to validate data received from manufacturers. Field inspections will be carried out in order to validate the condition of vehicles, engines or technology prior to first commercial sale to verify each component's certified configuration as initially built. NHTSA reserves the right to conduct inspections at other locations but will target only those components for which a violation would apply to OEMs and not the fleets or vehicle owners. Compliance inspections could be carried out through a number of approaches including during safety inspections or during compliance safety testing.

(iii) NHTSA will conduct audits and inspections in the same manner and, when possible, in conjunction with EPA. NHTSA will also attempt to coordinate inspections with EPA and share results.

(iv) Documents collected under NHTSA safety authority may be used to support fuel efficiency audits and inspections.

(2) At the end of each model year NHTSA will confirm a manufacturer's fleet or family performance values against the applicable standards and, if a manufacturer uses a credit flexibility, the amount of credits in each averaging set. The averaging set balance is based upon the engines or vehicles performance above or below the applicable regulatory subcategory standards in each respective averaging set and any credits that are traded into or out of an averaging set during the model year.

(i) If the balance is positive, the manufacturer is designated as having a credit surplus.

(ii) If the balance is negative, the manufacturer is designated as having a credit deficit.

(iii) NHTSA will provide notification to each manufacturer confirming its credit balance(s) after the end of each model year directly or through EPA.

(3) Manufacturers are required to confirm the negative balance and submit a fuel consumption credit plan as specified in § 535.7(a) along with supporting documentation indicating how it will allocate existing credits or earn (providing information on future vehicles, engines or technologies), and/or acquire credits, or else be liable for

a civil penalty as determined in paragraph (b) of this section. The manufacturer must submit the information within 60 days of receiving agency notification.

(4) Credit shortfall within an averaging set may be carried forward only three years, and if not offset by earned or traded credits, the manufacturer may be liable for a civil penalty as described in paragraph (b) of this section.

(5) Credit allocation plans received from a manufacturer will be reviewed and approved by NHTSA. NHTSA will approve a credit allocation plan unless it determines that the proposed credits are unavailable or that it is unlikely that the plan will result in the manufacturer earning or acquiring sufficient credits to offset the subject credit shortfall. In the case where a manufacturer submits a plan to acquire future model year credits earned by another manufacturer, NHTSA will require a signed agreement by both manufacturers to initiate a review of the plan. If a plan is approved, NHTSA will revise the respective manufacturer's credit account accordingly by identifying which existing or traded credits are being used to address the credit shortfall, or by identifying the manufacturer's plan to earn future credits for addressing the respective credit shortfall. If a plan is rejected, NHTSA will notify the respective manufacturer and request a revised plan. The manufacturer must submit a revised plan within 14 days of receiving agency notification. The agency will provide a manufacturer one opportunity to submit a revised credit allocation plan before it initiates civil penalty proceedings.

(6) For purposes of this regulation, NHTSA will treat the use of future credits for compliance, as through a credit allocation plan, as a deferral of civil penalties for non-compliance with an applicable fuel consumption standard.

(7) If NHTSA receives and approves a manufacturer's credit allocation plan to earn future credits within the following three model years in order to comply with regulatory obligations, NHTSA will defer levying civil penalties for non-compliance until the date(s) when the manufacturer's approved plan indicates that credits will be earned or acquired to achieve compliance, and upon receiving confirmed CO<sub>2</sub> emissions and fuel consumption data from EPA. If the manufacturer fails to acquire or earn sufficient credits by the plan dates, NHTSA will initiate civil penalty proceedings.

(8) In the event that NHTSA fails to receive or is unable to approve a plan

for a non-compliant manufacturer due to insufficiency or untimeliness, NHTSA may initiate civil penalty proceedings.

(9) In the event that a manufacturer fails to report accurate fuel consumption data for vehicles or engines covered under this rule, noncompliance will be assumed until corrected by submission of the required data, and NHTSA may initiate civil penalty proceedings.

(10) If EPA suspends or revoke a certificate of conformity as specified in 40 CFR 1036.255 or 1037.255, and a manufacturer is unable to take a corrective action allowed by EPA, noncompliance will be assumed, and NHTSA may initiate civil penalty proceedings or revoke fuel consumption credits.

(b) *Civil penalties*—(1) *Generally*. NHTSA may assess a civil penalty for any violation of this part under 49 U.S.C. 32902(k). This section states the procedures for assessing civil penalties for violations of § 535.3(h). The provisions of 5 U.S.C. 554, 556, and 557 do not apply to any proceedings conducted pursuant to this section.

(2) *Initial determination of noncompliance*. An action for civil penalties is commenced by the execution of a Notice of Violation. A determination by NHTSA's Office of Enforcement of noncompliance with applicable fuel consumption standards utilizing the certified and reported CO<sub>2</sub> emissions and fuel consumption data provided by the Environmental Protection Agency as described in this part, and after considering all the flexibilities available under § 535.7, underlies a Notice of Violation. If NHTSA Enforcement determines that a manufacturer's averaging set of vehicles or engines fails to comply with the applicable fuel consumption standard(s) by generating a credit shortfall, the incomplete vehicle, complete vehicle or engine manufacturer, as relevant, shall be subject to a civil penalty.

(3) *Numbers of violations and maximum civil penalties*. Any violation shall constitute a separate violation with respect to each vehicle or engine within the applicable regulatory averaging set. The maximum civil penalty is not more than \$37,500.00 per vehicle or engine. The maximum civil penalty under this section for a related series of violations shall be determined by multiplying \$37,500.00 times the vehicle or engine production volume for the model year in question within the regulatory averaging set. NHTSA may adjust this civil penalty amount to account for inflation.

(4) *Factors for determining penalty amount*. In determining the amount of

any civil penalty proposed to be assessed or assessed under this section, NHTSA shall take into account the gravity of the violation, the size of the violator's business, the violator's history of compliance with applicable fuel consumption standards, the actual fuel consumption performance related to the applicable standards, the estimated cost to comply with the regulation and applicable standards, the quantity of vehicles or engines not complying, and the effect of the penalty on the violator's ability to continue in business. The "estimated cost to comply with the regulation and applicable standards," will be used to ensure that penalties for non-compliance will not be less than the cost of compliance.

(5) *NHTSA enforcement report of determination of non-compliance*. (i) If NHTSA Enforcement determines that a violation has occurred, NHTSA Enforcement may prepare a report and send the report to the NHTSA Chief Counsel.

(ii) The NHTSA Chief Counsel will review the report prepared by NHTSA Enforcement to determine if there is sufficient information to establish a likely violation.

(iii) If the Chief Counsel determines that a violation has likely occurred, the Chief Counsel may issue a Notice of Violation to the party.

(iv) If the Chief Counsel issues a Notice of Violation, he or she will prepare a case file with recommended actions. A record of any prior violations by the same party shall be forwarded with the case file.

(6) *Notice of violation*. (i) The Notice of Violation will contain the following information:

(A) The name and address of the party;

(B) The alleged violation(s) and the applicable fuel consumption standard(s) violated;

(C) The amount of the proposed penalty and basis for that amount;

(D) The place to which, and the manner in which, payment is to be made;

(E) A statement that the party may decline the Notice of Violation and that if the Notice of Violation is declined within 30 days of the date shown on the Notice of Violation, the party has the right to a hearing, if requested within 30 days of the date shown on the Notice of Violation, prior to a final assessment of a penalty by a Hearing Officer; and

(F) A statement that failure to either pay the proposed penalty or to decline the Notice of Violation and request a hearing within 30 days of the date shown on the Notice of Violation will result in a finding of violation by default

and that NHTSA will proceed with the civil penalty in the amount proposed on the Notice of Violation without processing the violation under the hearing procedures set forth in this subpart.

(ii) The Notice of Violation may be delivered to the party by—

(A) Mailing to the party (certified mail is not required);

(B) Use of an overnight or express courier service; or

(C) Facsimile transmission or electronic mail (with or without attachments) to the party or an employee of the party.

(iii) At any time after the Notice of Violation is issued, NHTSA and the party may agree to reach a compromise on the payment amount.

(iv) Once a penalty amount is paid in full, a finding of “resolved with payment” will be entered into the case file.

(v) If the party agrees to pay the proposed penalty, but has not made payment within 30 days of the date shown on the Notice of Violation, NHTSA will enter a finding of violation by default in the matter and NHTSA will proceed with the civil penalty in the amount proposed on the Notice of Violation without processing the violation under the hearing procedures set forth in this subpart.

(vi) If within 30 days of the date shown on the Notice of Violation a party fails to pay the proposed penalty on the Notice of Violation, and fails to request a hearing, then NHTSA will enter a finding of violation by default in the case file, and will assess the civil penalty in the amount set forth on the Notice of Violation without processing the violation under the hearing procedures set forth in this subpart.

(vii) NHTSA’s order assessing the civil penalty following a party’s default is a final agency action.

(7) *Hearing Officer.* (i) If a party timely requests a hearing after receiving a Notice of Violation, a Hearing Officer shall hear the case.

(ii) The Hearing Officer will be appointed by the NHTSA Administrator, and is solely responsible for the case referred to him or her. The Hearing Officer shall have no other responsibility, direct or supervisory, for the investigation of cases referred for the assessment of civil penalties. The Hearing Officer shall have no duties related to the light-duty fuel economy or medium- and heavy-duty fuel efficiency programs.

(iii) The Hearing Officer decides each case on the basis of the information before him or her.

(8) *Initiation of action before the Hearing Officer.* (i) After the Hearing Officer receives the case file from the Chief Counsel, the Hearing Officer notifies the party in writing of—

(A) The date, time, and location of the hearing and whether the hearing will be conducted telephonically or at the DOT Headquarters building in Washington, DC;

(B) The right to be represented at all stages of the proceeding by counsel as set forth in paragraph (b)(9) of this section; and

(C) The right to a free copy of all written evidence in the case file.

(ii) On the request of a party, or at the Hearing Officer’s direction, multiple proceedings may be consolidated if at any time it appears that such consolidation is necessary or desirable.

(9) *Counsel.* A party has the right to be represented at all stages of the proceeding by counsel. A party electing to be represented by counsel must notify the Hearing Officer of this election in writing, after which point the Hearing Officer will direct all further communications to that counsel. A party represented by counsel bears all of its own attorneys’ fees and costs.

(10) *Hearing location and costs.* (i) Unless the party requests a hearing at which the party appears before the Hearing Officer in Washington, DC, the hearing may be held telephonically. In Washington, DC, the hearing is held at the headquarters of the U.S. Department of Transportation.

(ii) The Hearing Officer may transfer a case to another Hearing Officer at a party’s request or at the Hearing Officer’s direction.

(iii) A party is responsible for all fees and costs (including attorneys’ fees and costs, and costs that may be associated with travel or accommodations) associated with attending a hearing.

(11) *Hearing procedures.* (i) There is no right to discovery in any proceedings conducted pursuant to this subpart.

(ii) The material in the case file pertinent to the issues to be determined by the Hearing Officer is presented by the Chief Counsel or his or her designee.

(iii) The Chief Counsel may supplement the case file with information prior to the hearing. A copy of such information will be provided to the party no later than three business days before the hearing.

(iv) At the close of the Chief Counsel’s presentation of evidence, the party has the right to examine respond to and rebut material in the case file and other information presented by the Chief Counsel. In the case of witness testimony, both parties have the right of cross-examination.

(v) In receiving evidence, the Hearing Officer is not bound by strict rules of evidence. In evaluating the evidence presented, the Hearing Officer must give due consideration to the reliability and relevance of each item of evidence.

(vi) At the close of the party’s presentation of evidence, the Hearing Officer may allow the introduction of rebuttal evidence that may be presented by the Chief Counsel.

(vii) The Hearing Officer may allow the party to respond to any rebuttal evidence submitted.

(viii) After the evidence in the case has been presented, the Chief Counsel and the party may present arguments on the issues in the case. The party may also request an opportunity to submit a written statement for consideration by the Hearing Officer and for further review. If granted, the Hearing Officer shall allow a reasonable time for submission of the statement and shall specify the date by which it must be received. If the statement is not received within the time prescribed, or within the limits of any extension of time granted by the Hearing Officer, it need not be considered by the Hearing Officer.

(ix) A verbatim transcript of the hearing will not normally be prepared. A party may, solely at its own expense, cause a verbatim transcript to be made. If a verbatim transcript is made, the party shall submit two copies to the Hearing Officer not later than 15 days after the hearing. The Hearing Officer shall include such transcript in the record.

(12) *Determination of violations and assessment of civil penalties.* (i) Not later than 30 days following the close of the hearing, the Hearing Officer shall issue a written decision on the Notice of Violation, based on the hearing record. This may be extended by the Hearing officer if the submissions by the Chief Counsel or the party are voluminous. The decision shall address each alleged violation, and may do so collectively. For each alleged violation, the decision shall find a violation or no violation and provide a basis for the finding. The decision shall set forth the basis for the Hearing Officer’s assessment of a civil penalty, or decision not to assess a civil penalty. In determining the amount of the civil penalty, the gravity of the violation, the size of the violator’s business, the violator’s history of compliance with applicable fuel consumption standards, the actual fuel consumption performance related to the applicable standard, the estimated cost to comply with the regulation and applicable standard, the quantity of vehicles or engines not complying, and

the effect of the penalty on the violator's ability to continue in business. The assessment of a civil penalty by the Hearing Officer shall be set forth in an accompanying final order. The Hearing Officer's written final order is a final agency action.

(ii) If the Hearing Officer assesses civil penalties in excess of \$1,000,000, the Hearing Officer's decision shall contain a statement advising the party of the right to an administrative appeal to the Administrator within a specified period of time. The party is advised that failure to submit an appeal within the prescribed time will bar its consideration and that failure to appeal on the basis of a particular issue will constitute a waiver of that issue in its appeal before the Administrator.

(iii) The filing of a timely and complete appeal to the Administrator of a Hearing Officer's order assessing a civil penalty shall suspend the operation of the Hearing Officer's penalty, which shall no longer be a final agency action.

(iv) There shall be no administrative appeals of civil penalties assessed by a Hearing Officer of less than \$1,000,000.

(13) *Appeals of civil penalties in excess of \$1,000,000.* (i) A party may appeal the Hearing Officer's order assessing civil penalties over \$1,000,000 to the Administrator within 21 days of the date of the issuance of the Hearing Officer's order.

(ii) The Administrator will review the decision of the Hearing Officer de novo, and may affirm the decision of the hearing officer and assess a civil penalty, or

(iii) The Administrator may—

(A) Modify a civil penalty;

(B) Rescind the Notice of Violation; or

(C) Remand the case back to the Hearing Officer for new or additional proceedings.

(iv) In the absence of a remand, the decision of the Administrator in an appeal is a final agency action.

(14) *Collection of assessed or compromised civil penalties.* (i) Payment of a civil penalty, whether assessed or compromised, shall be made by check, postal money order, or electronic transfer of funds, as provided in instructions by the agency. A payment of civil penalties shall not be considered a request for a hearing.

(ii) The party must remit payment of any assessed civil penalty to NHTSA within 30 days after receipt of the Hearing Officer's order assessing civil penalties, or, in the case of an appeal to the Administrator, within 30 days after receipt of the Administrator's decision on the appeal.

(iii) The party must remit payment of any compromised civil penalty to NHTSA on the date and under such terms and conditions as agreed to by the party and NHTSA. Failure to pay may result in NHTSA entering a finding of violation by default and assessing a civil penalty in the amount proposed in the Notice of Violation without processing the violation under the hearing procedures set forth in this part.

(c) *Changes in corporate ownership and control.* Manufacturers must inform NHTSA of corporate relationship changes to ensure that credit accounts are identified correctly and credits are assigned and allocated properly.

(1) In general, if two manufacturers merge in any way, they must inform NHTSA how they plan to merge their credit accounts. NHTSA will subsequently assess corporate fuel consumption and compliance status of the merged fleet instead of the original separate fleets.

(2) If a manufacturer divides or divests itself of a portion of its automobile manufacturing business, it must inform NHTSA how it plans to divide the manufacturer's credit holdings into two or more accounts. NHTSA will subsequently distribute holdings as directed by the manufacturer, subject to provision for reasonably anticipated compliance obligations.

(3) If a manufacturer is a successor to another manufacturer's business, it must inform NHTSA how it plans to allocate credits and resolve liabilities per 49 CFR part 534.

#### **§ 535.10 How do manufacturers comply with fuel consumption standards?**

(a) *Pre-certification process.* (1) Regulated manufacturers determine eligibility to use exemptions or exclusions in accordance with § 535.3.

(2) Manufacturers may seek preliminary approvals as specified in 40 CFR 1036.210 and 40 CFR 1037.210. Manufacturers may request to schedule pre-certification meetings with EPA and NHTSA prior to submitting approval requests for certificates of conformity to address any joint compliance issues and gain informal feedback from the agencies.

(3) The requirements and prohibitions required by EPA in special circumstances in accordance with 40 CFR 1037.601 and 40 CFR part 1068 apply to manufacturers for the purpose of complying with fuel consumption standards. Manufacturers should use good judgment when determining how EPA requirements apply in complying with the NHTSA program. Manufacturers may contact NHTSA and

EPA for clarification about how these requirements apply to them.

(4) In circumstances in which EPA provides multiple compliance approaches manufacturers must choose the same compliance path to comply with NHTSA's fuel consumption standards that they choose to comply with EPA's greenhouse gas emission standards.

(5) Manufacturers may not introduce new vehicles into commerce without a certificate of conformity from EPA. Manufacturers must attest to several compliance standards in order to obtain a certificate of conformity. This includes stating comparable fuel consumption results for all required CO<sub>2</sub> emissions rates. Manufacturers not completing these steps do not comply with the NHTSA fuel consumption standards.

(6) Manufacturers apply the fuel consumption standards specified in § 535.5 to vehicles, engines and components that represent production units and components for vehicle and engine families, sub-families and configurations consistent with the EPA specifications in 40 CFR 86.1819, 1036.230, and 1037.230.

(7) Only certain vehicles and engines are allowed to comply differently between the NHTSA and EPA programs as detailed in this section. These vehicles and engines must be identified by manufacturers in the ABT and production reports required in § 535.8.

(b) *Model year compliance.* Manufacturers are required to conduct testing to demonstrate compliance with CO<sub>2</sub> exhaust emissions standards in accordance with EPA's provisions in 40 CFR part 600, subpart B, 40 CFR 1036, subpart F, 40 CFR part 1037, subpart R, and 40 CFR part 1066. Manufacturers determine equivalent fuel consumption performance values for CO<sub>2</sub> results as specified in § 535.6 and demonstrate compliance by comparing equivalent results to the applicable fuel consumption standards in § 535.5.

(c) *End-of-the-year process.* Manufacturers comply with fuel consumption standards after the end of each model year, if—

(1) For heavy-duty pickup trucks and vans, the manufacturer's fleet average performance, as determined in § 535.6, is less than the fleet average standard; or

(2) For truck tractors, vocational vehicles, engines and box trailers the manufacturer's fuel consumption performance for each vehicle or engine family (or sub-family), as determined in § 535.6, is lower than the applicable regulatory subcategory standards in § 535.5.

(3) For non-box and non-aero trailers, a manufacturer is considered in compliance with fuel consumption standards if all trailers meet the specified standards in § 535.5(e)(1)(i).

(4) NHTSA will use the EPA final verified values as specified in 40 CFR 86.1819, 40 CFR 1036.755 and 1037.755 for making final determinations on whether vehicles and engines comply with fuel consumption standards.

(5) A manufacturer fails to comply with fuel consumption standards if its final reports are not provided in accordance with § 535.7 and 40 CFR 86.1865, 1036.730, and 1037.730. Manufacturers not providing complete or accurate final reports by the required deadlines do not comply with fuel consumption standards. A manufacturer that is unable to provide any emissions results along with comparable fuel consumption values must obtain permission for EPA to exclude the results prior to the deadline for submitting final reports.

(6) A manufacturer that would otherwise fail to directly comply with fuel consumption standards as described in paragraphs (c)(1) through (3) of this section may use one or more of the credit flexibilities provided under the NHTSA averaging, banking and trading program, as specified in § 535.7, but must offset all credit deficits in its averaging sets to achieve compliance.

(7) A manufacturer failing to comply with the provisions specified in this part may be liable to pay civil penalties in accordance with § 535.9.

(8) A manufacturer may also be liable to pay civil penalties if found by EPA or NHTSA to have provided false information as identified through NHTSA or EPA enforcement audits or new vehicle verification testing as specified in § 535.9 and 40 CFR parts 86, 1036, and 1037.

#### **PART 537—AUTOMOTIVE FUEL ECONOMY REPORTS**

■ 290. Revise the authority citation for part 537 to read as follows:

**Authority:** 49 U.S.C. 32907; delegation of authority at 49 CFR 1.95.

■ 291. Revise § 537.5 to read as follows:

#### **§ 537.5 General requirements for reports.**

(a) For each current model year, each manufacturer shall submit a pre-model year report, a mid-model year report, and, as required by § 537.8, supplementary reports.

(b)(1) The pre-model year report required by this part for each current model year must be submitted during the month of December (*e.g.*, the pre-model year report for the 1983 model year must be submitted during December, 1982).

(2) The mid-model year report required by this part for each current model year must be submitted during the month of July (*e.g.*, the mid-model year report for the 1983 model year must be submitted during July 1983).

(3) Each supplementary report must be submitted in accordance with § 537.8(c).

(c) Each report required by this part must—

(1) Identify the report as a pre-model year report, mid-model year report, or supplementary report as appropriate;

(2) Identify the manufacturer submitting the report;

(3) State the full name, title, and address of the official responsible for preparing the report;

(4) Be submitted through an electronic portal identified by NHTSA (*i.e.* the Environmental Protection Agency VERYIFY database) or through the NHTSA CAFE database.

(5) Identify the current model year;

(6) Be written in the English language; and

(7)(i) Specify any part of the information or data in the report that the manufacturer believes should be withheld from public disclosure as trade secret or other confidential business information.

(ii) With respect to each item of information or data requested by the manufacturer to be withheld under 5 U.S.C. 552(b)(4) and 15 U.S.C. 2005(d)(1), the manufacturer shall—

(A) Show that the item is within the scope of sections 552(b)(4) and 2005(d)(1);

(B) Show that disclosure of the item would result in significant competitive damage;

(C) Specify the period during which the item must be withheld to avoid that damage; and

(D) Show that earlier disclosure would result in that damage.

(d) Each report required by this part must be based upon all information and data available to the manufacturer 30 days before the report is submitted to the Administrator.

#### **PART 538—MANUFACTURING INCENTIVES FOR ALTERNATIVE FUEL VEHICLES**

■ 292. Revise the authority citation for part 538 to read as follows:

**Authority:** 49 U.S.C. 32901, 32905, and 32906; delegation of authority at 49 CFR 1.95.

■ 293. Revise § 538.5 to read as follows:

#### **§ 538.5 Minimum driving range.**

(a) The minimum driving range that a passenger automobile must have in order to be treated as a dual fueled automobile pursuant to 49 U.S.C. 32901(c) is 200 miles when operating on its nominal useable fuel tank capacity of the alternative fuel, except when the alternative fuel is electricity or compressed natural gas. Beginning model year 2016, a natural gas passenger automobile must have a minimum driving range of 150 miles when operating on its nominal useable fuel tank capacity of the alternative fuel to be treated as a dual fueled automobile, pursuant to 49 U.S.C. 32901(c)(2).

(b) The minimum driving range that a passenger automobile using electricity as an alternative fuel must have in order to be treated as a dual fueled automobile pursuant to 49 U.S.C. 32901(c) is 7.5 miles on its nominal storage capacity of electricity when operated on the EPA urban test cycle and 10.2 miles on its nominal storage capacity of electricity when operated on the EPA highway test cycle.

Dated: June 19, 2015.

**Anthony R. Foxx,**

*Secretary, Department of Transportation*

Dated: June 19, 2015.

**Gina McCarthy,**

*Administrator, Environmental Protection Agency.*

[FR Doc. 2015–15500 Filed 7–10–15; 8:45 am]

**BILLING CODE 6560–50–P**



# FEDERAL REGISTER

---

Vol. 80                      Monday,  
No. 133                     July 13, 2015

Book 3 of 3 Books

Pages 40767–40894

---

Part III

## Department of the Interior

---

Bureau of Land Management

---

43 CFR Parts 3160 and 3170

Onshore Oil and Gas Operations; Federal and Indian Oil and Gas Leases;  
Site Security; Proposed Rule

**DEPARTMENT OF THE INTERIOR****Bureau of Land Management****43 CFR Parts 3160 and 3170**

[15X.LLWO300000.L13100000.NB00000]

RIN 1004-AE15

**Onshore Oil and Gas Operations;  
Federal and Indian Oil and Gas Leases;  
Site Security****AGENCY:** Bureau of Land Management, Interior.**ACTION:** Proposed rule.

**SUMMARY:** This proposed rule would replace Onshore Oil and Gas Order No. 3, Site Security (Order 3), with new regulations that would be codified in the Code of Federal Regulations (CFR). Order 3 establishes minimum standards for oil and gas facility site security. It includes provisions intended to ensure that oil and gas produced from Federal and Indian (except Osage Tribe) oil and gas leases are properly and securely handled, so as to ensure accurate measurement, production accountability, and royalty payments, and to prevent theft and loss. Order 3 was issued in 1989.

The changes proposed as part of this proposed rule would allow the BLM to strengthen its policies governing production verification and accountability by updating Order 3's requirements to address changes in technology and industry practices that have occurred in the 25 years since Order 3 was issued, and to respond to recommendations made by the Government Accountability Office (GAO) with respect to the BLM's production verification efforts. The proposed rule addresses Facility Measurement Points (FMPs), site facility diagrams, the use of seals, bypasses around meters, documentation, recordkeeping, commingling, off-lease measurement, and the reporting of incidents of unauthorized removal or mishandling of oil and condensate. The proposed rule also identifies certain acts of noncompliance that would result in an immediate assessment. Finally, it sets forth a process for the BLM to consider variances from the requirements of this proposed regulation.

The BLM believes these proposed changes will enhance its overall production verification and accountability efforts. As part of those efforts, the BLM also anticipates that it will separately propose new regulations to update and replace Onshore Oil and Gas Orders Nos. 4 (Order 4) and 5

(Order 5) related to measurement of oil and gas, respectively.

**DATES:** Send your comments on this proposed rule to the BLM on or before September 11, 2015. The BLM is not obligated to consider any comments received after the above date in making its decision on the final rule.

As explained later, the changes that follow would establish proposed new information collection requirements that must be approved by OMB. If you wish to comment on the information collection requirements in this proposed rule, please note that the OMB is required to make a decision concerning the collection of information contained in this proposed rule between 30 and 60 days after publication of this proposed rule in the **Federal Register**. Therefore, a comment to OMB on the proposed information collection requirements is best assured of being considered if OMB receives it by August 12, 2015.

**ADDRESSES:** *Mail:* U.S. Department of the Interior, Director (630), Bureau of Land Management, Mail Stop 2134 LM, 1849 C St., NW., Washington, DC 20240, Attention: 1004-AE15. *Personal or messenger delivery:* 20 M Street SE., Room 2134LM, Washington, DC 20003. *Federal eRulemaking Portal:* <http://www.regulations.gov>. Follow the instructions at this Web site.

Comments on the information collection burdens: *Fax:* Office of Management and Budget (OMB), Office of Information and Regulatory Affairs, Desk Officer for the Department of the Interior, fax (202) 395-5806. *Electronic mail:* [oira\\_docket@omb.eop.gov](mailto:oira_docket@omb.eop.gov). Please indicate "Attention: OMB Control Number 1004-XXXX," regardless of the method used to submit comments on the information collection burdens. If you submit comments on the information collection burdens, you should also provide the BLM with a copy of those comments, at one of the addresses shown above, so that we can summarize all written comments and address them in the final rule.

**FOR FURTHER INFORMATION CONTACT:** Michael Wade, BLM Colorado State Office, at 303-239-3737. For questions relating to regulatory process issues, please contact Faith Bremner, BLM Washington Office, at 202-912-7441. Persons who use a telecommunications device for the deaf (TDD) may call the Federal Information Relay Service (FIRS) at 1-800-877-8339 to contact the above individuals during normal business hours. FIRS is available 24 hours a day, 7 days a week to leave a message or question with the above individual. You will receive a reply during normal business hours.

**SUPPLEMENTARY INFORMATION:**

- I. Public Comment Procedures
- II. Background
- III. Discussion of the Proposed Rule
- IV. Procedural Matters

**I. Public Comment Procedures**

If you wish to comment on the proposed rule, you may submit your comments by any one of several methods specified (see **ADDRESSES** above). If you wish to comment on the information collection requirements, you should send those comments directly to the OMB as outlined (see **ADDRESSES**); however, we ask that you also provide a copy of those comments to the BLM.

Please make your comments as specific as possible by confining them to issues for which comments are sought in this notice, and explain the basis for your comments. The comments and recommendations that will be most useful and likely to influence agency decisions are:

1. Those supported by quantitative information or studies; and
2. Those that include citations to, and analyses of, the applicable laws and regulations.

The BLM is not obligated to consider or include in the Administrative Record for the rule comments received after the close of the comment period (see **DATES**) or comments delivered to an address other than those listed above (see **ADDRESSES**).

Comments, including names and street addresses of respondents, will be available for public review at the address listed under **ADDRESSES** during regular hours (7:45 a.m. to 4:15 p.m.), Monday through Friday, except holidays.

Before including your address, phone number, email address, or other personal identifying information in your comment, you should be aware that your entire comment—including your personal identifying information—may be made publicly available at any time. While you can ask us in your comment to withhold your personal identifying information from public review, we cannot guarantee that we will be able to do so.

**II. Background**

Under applicable law, royalties are owed on all production removed or sold from Federal and Indian oil and gas leases. The basis for those royalty payments is the measured production from those leases. In fiscal year (FY) 2014, onshore Federal oil and gas leases produced about 148 million barrels of oil, 2.48 trillion cubic feet of natural gas, and 2.9 billion gallons of natural gas



liquids, with a market value of more than \$27 billion and generating royalties of almost \$3.1 billion. Nearly half of these revenues were distributed to the States in which the leases are located. Leases on tribal and Indian lands produced 56 million barrels of oil, 240 billion cubic feet of natural gas, 182 million gallons of natural gas liquids, with a market value of over \$6 billion and generating royalties of over \$1 billion that were all distributed to the applicable tribes and individual allottee owners.

Given the magnitude of this production and the BLM's statutory and management obligations, it is critically important that the BLM ensure that operators accurately measure, properly report, and account for that production. The BLM is proposing updates to Order 3's requirements because they are necessary to reflect changes in oil measurement practices and technology since Order 3 was first promulgated.<sup>1</sup> Specifically, this proposed rule is designed to ensure the proper and secure handling of production from Federal and Indian (except Osage) oil and gas leases. The proper handling of production is essential to the accurate measurement, proper reporting, and accountability that are necessary to ensure that the American public, as well as Indian tribes and allottees, receive the royalties to which they are entitled on oil and gas produced from Federal and Indian leases, respectively.

Order 3 is one of seven Onshore Oil and Gas Orders that the BLM issued under its regulations at 43 CFR part 3160.<sup>2</sup> Order 3 primarily supplements the regulations at 43 CFR 3162.4 (records and reports), 3162.5 (environmental safety), 3162.7 (disposition and measurement of oil and gas production and site security on Federal and Indian (except Osage Tribe) oil and gas leases), subpart 3163 (non-compliance, assessments, and civil penalties), and subpart 3165 (relief, conflicts, and appeals). To date, the BLM's Onshore Orders have been published in the **Federal Register**, both for public comment and in final form, but they have not been codified in the CFR. With this rule, the BLM is now proposing to replace Order 3 and update

and codify the requirements regarding site security, as explained below.

In 2007, the Secretary appointed an independent panel—the Subcommittee on Royalty Management (Subcommittee)—to review the Department's procedures and processes related to the management of mineral revenues and to provide advice to the Department based on that review.<sup>3</sup> In a report dated December 17, 2007, the Subcommittee determined that the BLM's guidance regarding production accountability is “unconsolidated, outdated, and sometimes insufficient” (Subcommittee report, p. 30). The Subcommittee report found that this results in inconsistent and outmoded approaches to production accountability tasks and potential reductions in royalty revenue.

The Subcommittee report expressed concern that the applicable “BLM policy and guidance is outdated” and “some policy memoranda have expired” (Subcommittee report, p. 31). For example, the BLM issued Order 3 in 1989 and has not updated it since, even though BLM and industry practices and technologies have changed significantly in the intervening 25 years. The Subcommittee also expressed concern that “BLM policy and guidance have not been consolidated in a single document or publication”, which has led to the “BLM's 31 oil and gas field offices using varying policy and guidance” (id.). For example, “some BLM State Offices have issued their own ‘Notices to Lessees’ for oil and gas operations” (id.). While the Subcommittee recognized that such Notices to Lessees may have a positive effect on some oil and gas field operations, it also observed that they necessarily “lack a national perspective and may introduce inconsistencies among State [Offices]” (id.).

The Subcommittee specifically recommended that the BLM re-evaluate its regulations and update its policy and guidance on production accountability, including requiring that requests to commingle production from multiple leases, unit participating areas (PAs), or communitization agreements identify allocation among zones (Subcommittee report, p. 32). The Subcommittee also recommended that the BLM re-evaluate its policies and guidance for royalty-free use of gas in lease operations. It also specifically recommended that the BLM

establish a workgroup to evaluate Order 3. In response, the Department formed a fluid minerals team, comprised of Departmental employees who are oil and gas experts. Based on its review, the team determined that Order 3 should be updated.

In addition to the Subcommittee report, the GAO issued findings and recommendations addressing similar issues in 2010 (Report to Congressional Requesters, *Oil and Gas Management, Interior's Oil and Gas Production Verification Efforts Do Not Provide Reasonable Assurance of Accurate Measurement of Production Volumes* GAO-10-313 (GAO Report 10-313)).

The GAO found that Interior's measurement regulations and policies do not provide reasonable assurance that oil and gas are accurately measured. Regarding matters relevant to Order 3, the report found that the BLM lacks regulatory or policy requirements for operators to clearly identify measurement points, creating challenges for the BLM in verifying production (GAO Report 10-313, p. 34). It also found that the BLM does not have sufficient national policies and a consistent process for approving arrangements that allow operators to commingle production from multiple Federal, Indian, State, and private leases, which also makes it difficult for the agency to verify production (GAO Report 10-313, p. 36). The GAO specifically recommended that: (1) The BLM develop guidance clarifying when Federal oil and gas may be commingled and establish standardized measurement methods for such circumstances so that production can be adequately measured and verified; (2) BLM staff confirm that commingling agreements are consistent with Interior guidance before they are approved, and that the agreements facilitate key production verification activities; and (3) The BLM track all onshore meters, including information about meter location, identification number, and owner to help ensure that Interior is consistently tracking where and how oil and gas are measured.

The GAO reiterated some of these concerns in 2015 (Report to Congressional Requesters, *Oil and Gas Resources, Interior's Production Verification Efforts and Royalty Data Have Improved, But Further Actions Needed* GAO-15-39 (GAO Report 15-39)). In the 2015 report, the GAO acknowledged the improvements BLM had made in its processes and policies (e.g., issuing additional guidance regarding commingling approvals in 2013), but reiterated its view of the importance of the BLM undertaking an

<sup>1</sup> This proposed rule would replace Order 3, which was published in the **Federal Register** on February 24, 1989 (54 FR 8056), and which has been in effect since March 27, 1989.

<sup>2</sup> These regulations provide for the issuance of Onshore Oil and Gas Orders to “implement and supplement” the regulations found in part 3160. 43 CFR 3164.1(a). The Onshore Orders apply nationwide to all Federal onshore and Indian (except Osage Tribe) oil and gas leases.

<sup>3</sup> The Subcommittee was commissioned to report to the Royalty Policy Committee, which is chartered under the Federal Advisory Committee Act to provide advice to the Secretary and other departmental officials responsible for managing mineral leasing activities and to provide a forum for the public to voice concerns about mineral leasing activities.

update of its regulations related to measurement and site security (GAO Report 15–39, pp. 31–32).

Based in part on its concerns that the BLM's production verification efforts do “. . . not provide reasonable assurance that operators are accurately measuring and reporting” the volumes of oil and gas produced from Federal and Indian leases, the GAO included the BLM's onshore oil and gas program on its High Risk List in 2011 (Report to Congressional Committees, *High Risk Series, An Update*, GAO–11–278 (GAO Report 11–278), p. 15). Because the GAO's recommendations have not yet been fully implemented, the onshore oil and gas program has remained on the High Risk List in subsequent updates in 2013 (Report to Congressional Committees, *High Risk Series, An Update*, GAO–13–283) and 2015 (Report to Congressional Committees, *High Risk Series, An Update*, GAO–15–290).

In addition to concerns expressed by other parties, the BLM also recognizes, based on its own field experience, that its site security requirements need to be strengthened. For example, on the issue of the point of royalty measurement, it is not uncommon for a BLM inspector, a lease operator, and field employees to all have different understandings of where that point is on a given lease because Order 3 does not require operators to formally identify and obtain BLM approval for a specific

measurement point. One result of this confusion is that BLM inspectors sometimes drive out to remote locations to witness calibrations on meters that they believed were measuring production for purposes of determining royalty when, in fact, they were not. The inspectors may not discover the discrepancies until months or even years later, during audits when operators submit their production accountability paperwork and the meter information does not match. This can create needless uncertainties in production accounting and verification and can increase the time spent on individual inspections and audits by both operators and the BLM, which strains the BLM's limited resources, while also requiring additional response and resources on the part of operators.

Similarly, with respect to existing commingling approvals, the BLM recognizes that in the absence of uniform national guidance, some of the existing BLM-approved commingling agreements may not provide the production data that the BLM needs to independently verify production that is attributable to the Federal or Indian leases covered by those agreements. The absence of this data limits the BLM's ability to fulfill its obligation to ensure that all production from Federal and Indian (except Osage Tribe) oil and gas leases is properly accounted for and that royalties are properly calculated.

Many of the provisions in this proposed rule were developed in response to the BLM's experience and the recommendations made by the Subcommittee and the GAO. Others were developed by the BLM to enhance and clarify some of Order 3 requirements in response to changes in technology and industry practice, and changes to applicable statutory requirements. The provisions discussed below also respond to comments received during a series of public meetings held by the BLM on April 24 and 25, 2013, to discuss proposed revisions to Orders 3, 4, and 5. In aggregate, these provisions will help ensure that the production of Federal and Indian (except Osage Tribe) oil and gas is adequately accounted for. By replacing the patchwork of guidance developed by BLM state and field offices, the provisions of this proposed rule would also provide operators with a level of consistency as to the requirements applicable to their operations on Federal and Indian (except Osage Tribe) lands nationwide.

### III. Discussion of the Proposed Rule

#### A. General Overview

The following table provides an overview of the changes contemplated as part of this proposed rule and identifies the substantive proposed changes relative to Order 3.

BILLING CODE 4310–84–C

Order 3	Proposed Rule	Substantive Changes
I.A. Authority	43 CFR 3170.1 Authority	The proposed rule would update the authority section.
I.B. Purpose	(No separate section in the proposed rule.)	
I.C. Scope	43 CFR 3170.2	The proposed rule would add language regarding Indian Mineral Development Act agreements and Tribal Energy Resource Agreements.
II. Definitions	43 CFR 3170.3 and 3173.1	The proposed rule would add definitions of key terms used in the rule as well as a list of acronyms used. Terms for which new definitions would be added include: “allocation,” “audit trail,” “commingling,” “communitization agreement,” “condition of approval (COA),” “days,” “facility measurement point (FMP),” “incident of noncompliance (INC),” “land description,” “oil,” “maximum ultimate economic recovery,” “notice to lessees and operators,” “off-lease measurement,” “participating area,” “production,” “purchaser,” “source record,” “transporter,” and “variance.”
III. Requirements	43 CFR subpart 3173	
III.A. Storage and Sales Facilities – Seals	43 CFR 3173.2	
III.A.1.a.	None	The proposed rule would remove language in Order 3 referring to American Petroleum Institute (API) practices outlined in manual 12 R1 because the BLM anticipates referring to them in a new proposed oil measurement rule to replace Order 4 that the BLM anticipates issuing separately.

Order 3	Proposed Rule	Substantive Changes
III.A.1.b.	43 CFR 3173.2(a)	No significant change
III.A.1.c.	43 CFR 3173.2(b)	The proposed rule would require that appropriate valves be in an operable condition and accurately reflect whether the valve is open or closed.
III.A.1.d. Exclusion for waste oil.	43 CFR 3173.2(c)(3).	No significant change.
III.A.1.e. and f.	43 CFR 3173.2(c)	The proposed rule would make minor changes to clarify the exclusions to sealing appropriate valves.
III.A.1.g.	43 CFR 3173.2(a)	No significant change.
None	43 CFR 3173.2(d)	The proposed rule would add a provision that prohibits tampering with any appropriate valve (i.e., those valves that must be effectively sealed during the production or sales phase). Under the proposed rule, tampering with an appropriate valve could result in an assessment of civil penalties for knowingly or willfully preparing, maintaining, or submitting false, inaccurate, or misleading reports, records, or information under 30 U.S.C. 1719(d)(1) and existing 43 CFR 3163.2(f)(1), or knowingly or willfully removing, transporting, using, or diverting oil or gas from a lease site without valid legal authority under 30 U.S.C. 1719(d)(2) and existing 43 CFR 3163.2(f)(2), together with any other remedies provided by law.
None	43 CFR 3173.9	The proposed rule would require operators to maintain an inventory of the total observed volume in storage and would specify the records that an operator must maintain for each seal.

Order 3	Proposed Rule	Substantive Changes
III.A.2. Enforcement Provisions	43 CFR 3170.9	The proposed rule would remove all specific reference to: “Violation” (major or minor), “Corrective Action” (what needs to be done to resolve the violation), and “Normal Abatement Period” (how much time is allowed to correct the violation). The BLM will address these issues in an internal inspection and enforcement handbook, and, as appropriate, manuals or instructional memoranda (IMs). The new proposed section (43 CFR 3170.9) would provide that noncompliance with any requirements of part 3170 or any order issued thereunder may result in enforcement actions under 43 CFR subpart 3163 or any other remedy available under applicable law or regulation.
III.B. Lease Automatic Custody Transfer (LACT) Systems - Seals	43 CFR 3173.3	The proposed rule would expand the list of components that require seals.
III.C. Removal of Crude Oil from Storage Facilities by Means Other than Through a LACT.	43 CFR 3173.5	No significant change.
III.C.1.a. and b.	None	The proposed rule would remove run ticket requirements for quantity and quality because they would be covered in greater detail in the proposed new rule that is anticipated to replace Order 4.
III.C.1.c.	43 CFR 3173.5	No significant change.
III.D. Bypass Around Meters	43 CFR 3170.4	The prohibition against bypassing meters would remain; however, language would be added that would prohibit tampering with any measurement device, component of a

Order 3	Proposed Rule	Substantive Changes
		measurement device, or measurement process.
III.E. Theft or Mishandling of Oil	43 CFR 3173.8	The proposed rule would require purchasers and transporters, in addition to operators, to report incidents of apparent theft or production mishandling.
None	43 CFR 3173.6.	The rule proposes new standards for water-draining operations.
III.F Self-Inspection	None	This proposed rule would eliminate self-inspections.
None	43 CFR 3173.7	The rule proposes new standards for hot-oiling, clean-up, and completion operations.
III.G. Recordkeeping	43 CFR 3170.7	The proposed rule would require purchasers and transporters to comply with the same standards as operators for keeping, retaining, and submitting records associated with Federal and Indian leases. It would also clarify record retention requirements. Consistent with applicable statutory requirements, the proposed rule would require records generated for Federal leases to be maintained for at least 7 years, and records generated for Indian leases to be maintained for at least 6 years. These proposed changes would require the BLM to amend its regulations at 43 CFR 3162.4-1 by revising paragraph (d) and adding a new paragraph (e). The BLM is also proposing to amend 43 CFR 3163.2 and 43 CFR 3165.3 to include purchasers and transporters where appropriate.
III.H. Site Security Plan	None	This proposed rule would eliminate the need for a Site Security Plan. In its place, the rule would require additional recordkeeping and documentation relevant to site security in

Order 3	Proposed Rule	Substantive Changes
		connection with specific functions and operations. This proposed change would require the BLM to remove 43 CFR 3162.7-5(c) from its regulations. (Various provisions of the proposed rule, taken together, would result in removing all of 43 CFR 3162.7-5.)
III.I. Site Facility Diagrams	43 CFR 3173.11	This proposed rule would increase the level of detail contained in site facility diagrams currently required under 43 CFR 3162.7-5(d), by requiring information about the manufacturer, model, and serial number of each major component involved in royalty-free use of production in lease operations. It would also require lessees and operators to sign the site facility diagrams, certifying their accuracy. These proposed revisions would require the BLM to remove 43 CFR 3162.7-5(d) from its regulations.
None	43 CFR 3173.10	The proposed rule would add a new requirement that operators to submit a Form 3160-5 electronically when submitting for the record or requesting approval for: Site facility diagrams, FMP numbers, FMP amendments, off-lease measurement, or commingling and allocation approvals (CAAs).
None	43 CFR 3173.12	This proposed rule would require operators to obtain an FMP number for all measurement points. This requirement would be phased in according to the production levels of the properties the measurement point serves.
None	43 CFR 3173.13	This proposed rule would require operators to label FMPs with the FMP number, use the FMP number in required recordkeeping, and submit a Form 3160-5 to amend an FMP that details any modifications to the FMP within 20 business days after the change.

Order 3	Proposed Rule	Substantive Changes
None	43 CFR 3173.14 through 43 CFR 3173.21	This proposed rule would provide specific standards and requirements for surface and downhole commingling and allocation approvals of production from different leases, unit PAs, or communitized areas (CAs) that are consistent with the BLM's existing guidance as reflected in Instruction Memorandum (IM) 2013-152. Unlike the existing IM, the provisions of this proposed rule would establish standards for both new and existing commingling agreements.
None	43 CFR 3173.22 through 3173.28	This proposed rule would provide specific standards and requirements for approval of off-lease measurement of production from leases, unit PAs, CAs, or CAAs.
None	43 CFR 3173.29	This proposed rule would require the imposition of immediate assessments upon discovery of certain instances of noncompliance. For the first time, purchasers and transporters would be subject to immediate assessments if they: (1) Do not comply with requirements for keeping, retaining, and submitting accurate records associated with Federal and Indian leases; (2) Remove Federal seals without the Authorized Officer's (AO) or Authorized Representative's (AR) prior approval; or (3) Fail to report theft or mishandling of production to the BLM.
IV. Federal Seals	43 CFR 3173.4 and 3173.29	The proposed rule would increase immediate assessments from \$250 to \$1,000 for removing a Federal seal without the AO or AR's prior approval.
V. Variances from Minimum Standards	43 CFR 3170.6	The proposed rule contains language clarifying that the BLM has the right to rescind variances and modify conditions of approval due to changes in Federal law, technology, regulation, BLM policy, field operations, noncompliance, or other reasons.



Order 3	Proposed Rule	Substantive Changes
		With respect to variance requests themselves, the proposed rule would require that they be submitted separately from any plans or applications, such as for Master Development Plans, applications for permits to drill (APDs), or applications for rights-of-way. Finally, the proposed rule would strengthen and standardize the criteria the BLM uses for considering and granting variances.
None	43 CFR 3170.8	The proposed rule would specifically state that “BLM decisions, orders, assessments, or other actions under the regulations in this part are administratively appealable under the procedures prescribed in 43 CFR 3165.3(b) and 3165.4 and part 4.”

## BILLING CODE 4310-84-P

*B. Section-by-Section Analysis*

This proposed rule would be codified primarily in a new 43 CFR subpart 3173 within a new part 3170. The BLM is also concurrently preparing and anticipates issuing separate proposed rules to update and replace Onshore Oil and Gas Order 4 (oil measurement) and Onshore Oil and Gas Order 5 (gas measurement). Those proposed rules are anticipated to be codified at new 43 CFR subparts 3174 and 3175, respectively. As a result, the proposed rule also includes a new subpart 3170 that would contain definitions of certain terms and common provisions, *i.e.*, provisions prohibiting by-pass of and tampering with meters; procedures for obtaining variances from the requirements of a particular rule; requirements for recordkeeping, records retention, and submission; and administrative appeal procedures.

In addition, the proposed rule would also make several changes to various provisions in 43 CFR part 3160. Proposed changes to 43 CFR 3162.3–2, 3162.4–1, 3162.6, 3162.7–1, 3163.2, and 3163.5 are discussed in connection with the proposed new subpart 3170 or 3173 provision to which the particular change relates. Other changes to provisions in part 3160 are discussed at the end of this section-by-section analysis.

## Subpart 3170—Onshore Oil and Gas Operations; General and Related Provisions

## Section 3170.1 Authority

Proposed § 3170.1 would identify the various grants of rulemaking authority in the Federal and Indian mineral leasing statutes and related statutes that give the Secretary authority to promulgate this rule.

## Section 3170.2 Scope

Proposed § 3170.2 would explain that the regulations in part 3170 would apply to all Federal onshore and Indian oil and gas leases (except those of the Osage Tribe), and, with certain exceptions, to agreements for oil and gas under the Indian Mineral Development Act and agreements under a Tribal Energy Resource Agreement entered into with the Secretary. In addition, State or private tracts committed to a federally approved unit or communitization agreement as defined by or established under 43 CFR subpart 3105 or 43 CFR part 3180 also would be subject to the rule.

## Section 3170.3 Definitions and Acronyms

This proposed section would define terms and acronyms used in more than one of the subparts of part 3170 that the BLM has proposed here (subpart 3173) or anticipates proposing (subparts 3174 (oil measurement) and 3175 (gas measurement)).

Of these new terms, the proposed definition of “facility measurement point (FMP)” merits discussion here; other terms are discussed below. Under the proposed rule, an FMP is a “BLM-approved point where oil or gas produced from a Federal or Indian lease, unit, or CA is measured and the measurement affects the calculation of the volume or quality of production on which royalty is owed.” As explained below, the proposed rule sets forth a process for an operator of a new or an existing facility to apply for approval of an FMP and issuance of an FMP number in proposed § 3173.12. Because proposed § 3173.12 would require operators of existing facilities to apply for an FMP in stages over a 27-month period, it will require 3 years from the effective date of the final rule for the BLM to receive, evaluate, and act on FMP applications for existing facilities. Therefore, for purposes of compliance with other provisions of this proposed rule, during this interim period, the proposed definition of an FMP makes clear that an FMP “also includes a meter or measurement facility used in the determination of the volume or quality of royalty-bearing oil or gas produced before BLM approval of an FMP under § 3173.12 of this part.”

While meters used in determining the volume or quality of production include allocation meters,<sup>4</sup> the proposed

<sup>4</sup> An allocation meter is a meter that measures production from a particular lease, unit, unit PA, or CA that is commingled with production from

definition of FMP does not include allocation facilities that are part of a commingling and allocation approval issued pursuant to proposed § 3173.15 below or that were approved after July 9, 2013. Since July 9, 2013, under BLM Instruction Memorandum (IM) 2013–152, issued on that date, BLM authorized officers may approve only those commingling requests that: (1) Have no royalty impacts (*e.g.*, commingled properties have the same mineral ownership, royalty rate, and revenue distribution); (2) Involve “low-volume properties”<sup>5</sup>; or (3) Involve circumstances where overriding considerations of continued production outweigh the potential inaccuracies of the allocation method. As explained below, proposed § 3173.15 carries forward the requirements of IM 2013–152 related to the approval of commingling requests. For commingling requests that meet these requirements, it is not necessary for the allocation facilities to meet the applicable oil measurement or gas measurement standard. Thus, it is not necessary for these facilities (*i.e.*, those approved after July 9, 2013 or pursuant to proposed 3173.15) to be regarded as FMPs. Allocation meters or facilities approved before July 9, 2013, must meet the standards of the applicable current Order and would have to meet the standards of the proposed rules according to the prescribed timeframes for compliance; therefore, they will continue to be FMPs.

#### Section 3170.4 Prohibitions Against By-Pass and Tampering

Proposed § 3170.4 would strengthen the existing prohibition against meter by-passes in section III.D. of Order 3 by adding language that would prohibit tampering with any measurement device, component of a measurement device, or measurement process. Tampering would include any adjustment or alteration to the meter or measurement device or measurement

process that could introduce bias into the measurement or affect the BLM’s ability to independently verify volumes or qualities reported. Examples of tampering include installing an orifice plate in a gas meter with the bevel upstream, adjusting a transducer to read higher or lower than a certified test device, entering incorrect information into the configuration log of an electronic gas measurement system, submitting derived integral values on a volume statement in lieu of raw data, or making analogous adjustments or alterations to an oil measurement system.

#### Section 3170.5 Industry Standards Incorporated by Reference

**§ 3170.5 would be reserved for potential future incorporation by reference of standards that would apply to more than one of the subparts of part 3170.**

#### Section 3170.6 Variances

Proposed § 3170.6 would make the BLM’s existing process and regulations for granting variances from the minimum standards of this rule more clear and uniform.

Proposed § 3170.6(a)(1) through (3) would prescribe the requirements for submitting a request for a variance from a requirement in the regulations in part 3170. Importantly, paragraph (a)(2) would require that a request for a variance be submitted as a separate document from any plans or applications. A request for a variance “buried” in another document, such as a request submitted as part of a master development plan, application for permit to drill, right-of-way application, or other applications for approval rather than submitted separately would not be considered. Approval of a plan or application that contains a request for a variance would not constitute approval of the variance.

Proposed § 3170.6(a)(4) would strengthen and standardize the criteria the BLM uses for granting variances. Under Order 3, the AO is required to make only one determination—whether or not the variance request meets or exceeds the objectives of the applicable minimum standard. Under this proposed paragraph, the AO still would have to make that determination before granting a variance. Additionally, the proposed change would require the AO to make two more determinations before granting a variance—that issuing a variance would not adversely affect royalty income or production accountability and is consistent with maximum ultimate economic recovery.

Proposed § 3170.6(a)(5) and (6) would specify that granting or denying a variance is entirely within the BLM’s discretion, and that a variance from a requirement in a regulation does not constitute a variance to any other regulations, including Onshore Oil and Gas Orders.

Proposed § 3170.6(b) would make clear that the BLM has the right to rescind a variance or modify any condition of approval of a variance due to changes in Federal law, technology, regulation, BLM policy, field operations, noncompliance, or other reasons.

#### Section 3170.7 Required Recordkeeping, Records Retention and Records Submission

Proposed § 3170.7 would update BLM regulations to reflect the records retention requirement for Federal oil and gas leases that Congress established in 1996 amendments to the Federal Oil and Gas Royalty Management Act (FOGRMA).

Paragraphs (a) and (b) would establish the coverage of the records-retention requirement relative to both persons covered and the time period in which records are generated. Purchasers and transporters would be held to the same minimum standards as operators for recordkeeping, records retention, and records submission—*i.e.*, to maintain all records that are relevant to determining the quality, quantity, disposition, and verification of production from Federal and Indian leases. Section 103(a) of FOGRMA, 30 U.S.C. 1713(a), requires persons involved in transporting and purchasing oil or gas through the point of first sale or the point of royalty computation, whichever is later (along with persons involved in producing or selling), to “establish and maintain any records, make any reports, and provide any information that the Secretary may, by rule, reasonably require.” Order 3, however, does not expressly require transporters and purchasers to establish and maintain any records (except for the requirement in section III.C.2.c. that truck drivers transporting production have information about the load in their possession (see 30 U.S.C. 1712(c)(1)).

Under proposed § 3170.7(c), records pertaining to Federal leases, units, or CAs would have to be maintained for at least 7 years, subject to applicable statutory requirements for further retention under certain circumstances (see 30 U.S.C. 1724(f)), as required under the 1996 amendments to FOGRMA. Under proposed § 3170.7(d), records pertaining to Indian leases, units, or CAs would have to be maintained for at least 6 years, subject to applicable statutory requirements for

other leases, units, unit PAs, or CAs before the point of royalty measurement, *i.e.*, the meter that measures the production for purposes of determining royalty. The production measured at the point of royalty measurement is then allocated back to the respective contributing properties on the basis of each allocation meter’s proportion of the total production measured by all allocation meters.

<sup>5</sup> As explained below, “low-volume properties” include leases, unit PAs, or CAs that do not produce sufficient volumes for the operator to realize from continued production a sufficient rate of return on the investment required to achieve non-commingled measurement, such that a prudent operator would opt to plug a well or shut in the lease, unit PA, or CA if the commingling request were not approved. In these situations, the economic considerations of continued production outweigh the inaccuracies of the allocation method.

further retention under certain circumstances (see 30 U.S.C. 1713(b)). The records-retention requirement on Indian leases would be unchanged because the 1996 amendments, by their express terms, applied only to Federal leases and not to Indian leases.

Proposed § 3170.7(e) would address the relationship of these two requirements for units and CAs that contain both Federal and Indian leases.

Proposed § 3170.7(f) would require the record holders to maintain an audit trail.

Under proposed § 3170.7(g) and (h), purchasers and transporters also would be required to place the new FMP numbers on all records associated with Federal and Indian leases, units, or CAs, after the BLM has assigned them, and to provide these records to the BLM upon request.

These changes are proposed to ensure that all records—whether they are created by lessees, operators, transporters, or purchasers—are clear, accurate, and readily available to the BLM. Under existing requirements, if BLM staff, in the course of auditing and verifying production, needs to review transporter or purchaser records, staff typically must ask the operator or lessee to provide the documents. Many transporters and purchasers have their own internal systems for identifying sales measurement points, with which operators may not be familiar. Sometimes operators do not maintain their own records properly, preferring instead to rely on the transporters' and purchasers' records. This has the potential to create long delays when transporters and purchasers fail to respond quickly to operators' document requests. Sometimes operators go out of business or are acquired by other companies and their records are destroyed, making it impossible for BLM staff to verify production. The BLM believes that it is important for everyone involved in the production and sale of oil and gas produced from Federal and Indian leases to be responsible for maintaining and providing their own records.

If a purchaser or transporter fails to maintain and submit records as required under this proposed rule, the purchaser or transporter would be subject to civil penalties under Section 109 of FOGDRA, 30 U.S.C. 1719. Consequently, the BLM is proposing to amend its civil penalty rules at 43 CFR 3163.2 to designate the first sentence of paragraph (a) of the existing § 3163.2 as paragraph (a)(1), and to add a new paragraph (a)(2). The second sentence of the existing paragraph (a) (pertaining to the maximum amount of the penalty if

the violation is not corrected within 20 days of the date of notice) would be redesignated as paragraph (b)(1). The existing paragraph (b) (pertaining to the maximum amount of the penalty if the violation is not corrected within 40 days of the date of notice) would be redesignated as paragraph (b)(2). References to purchasers and transporters would be added to the penalty amount provisions in paragraph (b).

Similarly, the BLM proposes to add to the notice requirements of existing regulations at 43 CFR 3165.3 a provision regarding notice to a purchaser or transporter (who is not an operating rights owner or operator) of failure to comply with records maintenance or production requirements. The BLM proposes to divide the several sentences of the existing paragraph (a) into numbered subparagraphs. After the first sentence, which would be redesignated as paragraph (a)(1) (and rephrased into active voice), the BLM proposes to add a new paragraph (a)(2). Enforcement of recordkeeping violations taken against an entity other than the lessee or operator under these proposed provisions also would be addressed in the proposed inspection and enforcement handbook being developed. These enforcement actions would include the issuance of Incidents of Noncompliance (INCs) and the assessment of civil penalties.

In 43 CFR 3162.4–1, the BLM is proposing to revise paragraph (a) to reflect that the new recordkeeping requirements also would apply to “source records” that are relevant to “determining and verifying the quality, quantity, and disposition of production from or allocable to Federal or Indian leases.” Paragraph (d) would be revised to establish the new records retention period, and would mirror for part 3160 the provisions in paragraphs (c) through (e) of proposed § 3170.7. A new paragraph (e) would be added that would list the “record holders” who would be subject to the new recordkeeping requirements. Additionally, the BLM is proposing to remove paragraph (f) from 43 CFR 3162.7–1, Disposition of production, which refers to the 6-year retention period, since the initial statutory retention period is now 7 years, as would be prescribed in the proposed amendment to § 3162.4–1 and in proposed § 3170.7.

#### Section 3170.8 Appeal Procedures

Proposed § 3170.8 would provide that BLM decisions, orders, assessments, or other actions under the proposed part 3170 are administratively appealable

(first to the BLM State Director and then to the Interior Board of Land Appeals) under 43 CFR 3165.3(b), 3165.4, and part 4.

#### Section 3170.9 Enforcement

Proposed § 3170.9 would provide that noncompliance with any requirements of part 3170 or any order issued thereunder may result in enforcement actions under 43 CFR subpart 3163 or any other remedy available under applicable law or regulation.

#### Subpart 3173—Requirements for Site Security and Production Handling and Related Provisions

##### Section 3173.1 Definitions and Acronyms

Section 3173.1 of the proposed rule would define the terms and acronyms that are unique to proposed subpart 3173. The section would adopt the same definitions of some of the terms defined in Order 3, with some minor revisions to either simplify or clarify those definitions. Several of the terms defined in Order 3 would be defined in proposed § 3170.3.

The proposed rule adds a definition of “low-volume property,” which is intended to define one category of circumstances under which commingled measurement of production from a lease, unit PA, or CA may be justified, even though it would not meet the conditions of proposed § 3173.14(a)(1) regarding mineral interest ownership of commingled production. The proposed rule also provides a definition for “land description.”

##### Section 3173.2 Storage and Sales Facilities—Seals

Paragraphs (a) and (b) of proposed § 3173.2 would require any lines entering or leaving any oil storage tank or storage facility to have valves capable of being effectively sealed. These paragraphs would prescribe which valves must be effectively sealed during which operational phases (production, sales, water draining, or hot oiling). Paragraph (c) identifies the specific types of valves that are not considered “appropriate valves” (i.e., valves that must be sealed during the production phase or the sales phase) for purposes of this requirement. The requirements of paragraphs (a) through (c) would largely correspond to the existing requirements in Order 3, with some refinements.

Paragraph (d) would prohibit tampering with an “appropriate valve,” and would provide that tampering may result in assessment of a civil penalty for knowingly or willfully preparing, maintaining, or submitting false,

inaccurate, or misleading information under Section 109(d)(1) of FOGMA, 30 U.S.C. 1719(d)(1), and 43 CFR 3163.2(f)(1), or for knowingly or willfully taking, removing, or diverting oil or gas from a lease without valid legal authority under Section 109(d)(2) of FOGMA, 30 U.S.C. 1719(d)(2), and 43 CFR 3163.2(f)(2).

#### Section 3173.3 Oil Measurement System Components—Seals

Proposed § 3173.3 would identify a nonexclusive list of the components used in LACT meters or Coriolis oil measurement systems that must be effectively sealed to indicate tampering.

#### Section 3173.4 Federal Seals

Paragraph (a) of proposed § 3173.4 would codify the authority in section IV of Order 3 for the BLM to place a Federal seal on any appropriate valve, sealing device, or oil meter system component that does not comply with the requirements of proposed § 3173.2 or § 3173.3. Paragraph (b) clarifies that the placement of a Federal seal does not relieve the operator of the requirement to comply with § 3173.2 or § 3173.3. Paragraph (c) would prohibit the removal of a Federal seal without BLM approval.

#### Section 3173.5 Removing Production From Tanks for Sale and Transportation by Truck

Consistent with the existing requirements of section III.C.1.c. of Order 3, paragraphs (a) and (b) of proposed § 3173.5 would identify who must possess the information that would be required by § 3174.12 of this part (which the BLM intends to propose separately) when production is removed from storage tanks for transportation by truck. Paragraph (c) would make the purchaser or transporter responsible for the entire contents of a tank until it is resealed.

#### Section 3173.6 Water-Draining Operations

Proposed § 3173.6 would require that specific information be recorded when water is drained from tanks that hold hydrocarbons. Under existing regulations, the operator is required to record only the date, seal number removed, new seal number installed, and the reason for draining. The operator currently is not required to record the volume of hydrocarbons that are in the tank before and after water is drained. This could lead to hydrocarbons being drained with the water and removed without proper measurement and accounting, and without royalties being paid. This

proposed rule would require operators to record the volume of hydrocarbons that are in the tank both before and after water is drained.

#### Section 3173.7 Hot Oiling, Clean-up, and Completion Operations

Proposed § 3173.7 would require that specific information be recorded when hydrocarbons are removed from storage and used on the lease, unit, or CA for hot oiling, clean-up, and completion operations, including the volume of hydrocarbons removed from storage and expected to be returned to storage.

Under existing requirements, the operator is required to record only the date, seal number removed, new seal number installed, and reason for removing oil for hot-oiling, clean-up, or completion operations. The operator currently is not required to record the volume of hydrocarbons that is removed from storage and is expected to be returned. This could lead to the volume of produced hydrocarbons being counted twice; first when it was initially produced then later after it is returned to storage.

#### Section 3173.8 Report of Theft or Mishandling of Production

Paragraph (a) of proposed § 3173.8 would require transporters and purchasers, along with operators, to report incidents of theft and mishandling of production to the BLM whenever they or their employees discover it. Such reports may be made orally or through a “written incident report.” In the proposed rule any oral reports must be followed by a written report within 10 business days. This reporting requirement is important because sometimes transporters and purchasers are the first ones to discover theft and mishandling of production or to recognize suspicious activity. Proposed paragraph (b) would specify the information that must be included in a written incident report.

#### Section 3173.9 Required Recordkeeping for Inventory and Seal Records

Paragraph (a) of proposed § 3173.9 would require operators to measure and record the total observed volume in storage at the end of each calendar month. Proposed paragraph (b) would specify the records that an operator must maintain for each seal.

#### Section 3173.10 Form 3160–5, Sundry Notices and Reports on Wells

Proposed § 3173.10 would require all parties involved in Federal and Indian oil and gas production to submit a Form 3160–5 electronically to the BLM for

their site facility diagrams, requests for FMP designations, requests for CAAs, requests for off-lease measurement, and any amendments to the diagrams or requests. This would, in the long run, increase efficiencies throughout BLM field offices for both the BLM and operators by making the diagrams easier to track and more accessible to inspectors in the field. This new requirement would also make it easier for the BLM to keep track of equipment and operational changes at a given facility and ensure that the parties are complying with Federal laws, rules, and regulations, while at the same time reducing the need for operators to respond to requests for information and making what information is needed easier to submit. Operators who are small businesses that do not have access to the Internet would be exempt from this requirement. BLM notes that the Office of Natural Resources Revenue (ONRR) already requires operators producing oil and gas from onshore Federal and Indian leases onshore to file their monthly Oil and Gas Operations Reports (OGORs) electronically, and thus this requirement is expected to be relatively easy to implement.

This proposed rule would increase the number of companies and company representatives using the e-filing capabilities of the BLM’s Automated Fluid Minerals Support System (AFMSS). Currently, filing parties inconsistently use this e-filing system because it is not required. Preliminary estimates are that the BLM would see a tenfold increase in e-filings, from 500 to 5,000.

#### Section 3173.11 Site Facility Diagrams

Paragraphs (a) through (c) of proposed § 3171.11 would set forth the requirements for the content and format of site facility diagrams. These requirements are important because inspection and verification of company-submitted site facility diagrams is one of the BLM’s primary mechanisms for ensuring operators are complying with measurement regulations and policy. The requirements in the proposed section would update and replace Order 3’s Site Security Plan. Currently, the BLM requires operators to provide generalized diagrams showing each piece of equipment being used at a facility, including connections between each piece of equipment, valve positions on production storage tanks (sales valves, drain valves, equalizers, and overflow valves), and their relative positions to each other. Tank valve positions (open or closed) are dependent upon whether the tank is in

the production, sales, or drain phase of operations.

Under proposed § 3173.11, new site facility diagrams would, in addition to the drawings, include important and specific information such as the FMP number; land description; Federal or Indian lease, unit, or CA number; site equipment with any corresponding serial identification numbers and manufacturer's consumption ratings; a reasonable royalty-free use determination; and a signature block. This more detailed information would provide the BLM with a more useful tool to achieve improved production accountability.

In addition to the requirements above, proposed § 3173.11(c) would also allow the BLM, for the first time, to verify royalty-free-use volumes reported by the operator on OGORs. Under the applicable statutes and lease terms, the portion of the oil and gas produced that is used to power operations on the lease, CA, or unit, such as using natural gas to power drilling and pumping equipment, is not royalty-bearing. This use of oil and gas is referred to as "royalty-free use."

Currently, operators provide estimates of their royalty-free-use volumes to ONRR each month, but the BLM lacks an ability to verify those estimates. Proposed § 3173.11(c)(11) would require operators to report to the BLM on their site facility diagrams what equipment is being used on the lease and how they determine the volume of oil or gas used royalty free by that equipment (based on equipment manufacturers' fuel-use ratings), if the volume is not measured. This new requirement would provide greater consistency in how the volume of oil and gas used royalty free is determined and enable the BLM to more easily verify those volumes. This requirement enhances production accountability and responds to key recommendations made by the GAO (Report 10-313). Requiring this information to be reported on the more detailed facility diagram would ultimately save time because it would eliminate the need for the BLM to obtain the information in connection with a production accountability review.

Proposed 3173.11(d) would require the operator of an existing facility (*i.e.*, one in service before the effective date of the final rule) to submit a new site facility diagram that complies with the requirements of this proposed section within 30 days of obtaining an FMP number under proposed § 3173.12 below. Under proposed § 3173.11(e), operators of existing facilities that do not require an FMP number, but for which a diagram would be required

under the proposed rule (for example, facilities that dispose of produced water), would have 60 days after the effective date of the final rule to submit compliant diagrams.

#### Section 3173.12 Applying for a Facility Measurement Point

Section 3173.12 of the proposed rule would, for the first time, establish a formal nationwide process for designating and approving the point at which oil or gas must be measured for the purpose of determining royalty. Currently, the BLM does not have a formal, written process for designating measurement points on the leases it manages. (Some Field Offices have their own internal policies for establishing these points.) This lack of uniform guidance across Field Offices has resulted in instances of confusion about the location of royalty measurement points, which interferes with the production verification process. This proposed section would require operators to obtain BLM approval of FMPs for all measurement points used to determine royalties. The BLM would approve an FMP that meets the requirements of this proposed rule (the most important elements of which would be identification of the wells associated with the FMP, the measurement method, and component information). The BLM would assign each FMP a unique identifying number, which the operator, transporter, or purchaser would then use when reporting production results to ONRR.

The Bureau of Safety and Environmental Enforcement (BSEE) already assigns a similar FMP number for offshore oil and gas leases, which the operator, transporter, or purchaser must then use when reporting production results to ONRR. The changes in this proposed rule would make BLM practices consistent with existing BSEE and ONRR practices, for production reporting without having to create an entirely new numbering system.

Paragraph (a)(1) of this proposed section would provide that the FMP(s) for a lease, unit PA, or CA would have to be located within the boundaries of the lease, unit, or CA from which the oil or gas is produced, and must measure only production from that lease, unit PA, or CA, unless otherwise approved. Proposed paragraph (a)(2) would provide that off-lease measurement, commingling, or allocation of production requires prior approval under 43 CFR 3162.7-2 and 3162.7-3 and proposed §§ 3173.15, 3173.16, 3173.24, and 3173.25 of this proposed rule.

Proposed paragraph (b) would provide that the BLM will not approve a meter at the tailgate of a gas processing plant located off the lease, unit, or CA as an FMP. This continues existing uniform practice.

Proposed paragraph (c) would provide that the operator must apply for approval of separate FMP numbers for an FMP that measures oil produced from a particular lease, unit PA, CA, or CAA and an FMP that measures gas produced from the same lease, unit PA, CA, or CAA, even if the measurement equipment or facilities are at the same location. In the numbering system for FMPs in use by both ONRR and BSEE (for offshore leases), the first pair of numbers in the FMP number specifies whether the FMP measures oil or measures gas. The BLM would not approve the same FMP number for a facility that measures oil and a facility that measures gas.

Proposed paragraph (d) would require the operator to obtain approval for the FMP for a new measurement facility (*i.e.*, one coming into service after the effective date of the final rule) before any production leaves the facility.

Proposed paragraph (e) would provide that for existing production measurement facilities, an operator would have 9 months, 18 months or 27 months from the effective date of the final rule within which to apply for BLM approval of its FMP, depending on the production level of the lease, unit PA, CA, or CAA that the measurement facility serves. The prescribed application deadline would apply to both oil and gas measurement facilities measuring production from that lease, unit PA, CA, or CAA. The BLM proposes to require applications for FMPs for existing measurement facilities that serve operations with the highest production volumes first. For stand-alone leases, unit PAs, CAs, and CAAs that produce 6,000 Mcf or more of gas per month, or 40 barrels or more of oil per month, the BLM is proposing that the operator would have to apply for approval of the FMP(s) within 9 months after the effective date of the final rule. For stand-alone leases, unit PAs, CAs, or CAAs that produce 3,000 Mcf or more but less than 6,000 Mcf of gas per month, or 20 barrels or more but less than 40 barrels of oil per month, the operator would have to apply for approval of the FMP(s) within 18 months after the effective date of the final rule. For stand-alone leases, unit PAs, CAs, or CAAs that produce less than 3,000 Mcf of gas per month and less than 20 barrels of oil per month, the operator would have to apply for approval of the FMP(s) within 27

months after the effective date of the final rule. These thresholds would be calculated as an average over the 12 months preceding the effective date of the final rule or the period the lease, unit, CA, or CAA has been in production, whichever is shorter.

If the operator applies for an FMP approval by the required date, the operator could continue to use the existing measurement points until the BLM acts on the application. If the operator fails to apply for an FMP approval by the required date, the operator would be subject to an incident of noncompliance and assessment of civil penalty under 43 CFR subpart 3163, together with any other remedy available under applicable law or regulation.

The BLM specifically solicits comments regarding its proposed threshold volumes and required periods for submitting applications for FMP approvals. Should the BLM consider alternative application periods or volume thresholds? If so, what periods of time would be appropriate for what production volume levels and on what basis? Based on comments received and further review, the BLM may prescribe different application periods in the final rule.

Proposed paragraph (f) would prescribe the information that a request for FMP approval would have to include. Proposed paragraph (g) would allow concurrent requests for FMP approval and requests for approval of off-lease measurement or commingling. Under proposed paragraph (h), the BLM will assign a number to the FMP if it approves a request.

This proposed section would implement one of the GAO's recommendations that the Interior Department consistently track where and how oil and gas are measured, including information about meter location, identification number, and owner. Operators would be required to obtain approval from the BLM for the location of the FMP at which oil or gas is measured. The BLM would then tie the FMP numbers to other appropriate approvals, such as site facility diagrams, off-lease measurement, commingling, and royalty-free use (if volumes used royalty free are measured).

Operators, purchasers, and transporters would be required to label each FMP with the assigned number, to use the FMP number on related documents or records, and to use the number for production reporting to ONRR. Related documents or records would include, but would not be limited to, calibration reports, gas

analysis, sales statements, manifests, seal records, and approvals.

The BLM estimates there are approximately 120,000 existing oil and gas facilities associated with Federal and Indian leases. Many facilities would have one FMP for oil and one FMP for gas, resulting in approximately 220,000 FMPs. We anticipate that designating FMPs for almost all operators would not require any physical changes to existing facilities other than the signage requirements discussed below. The only exception would be in some instances of commingling or off-lease measurement, which are discussed below in connection with proposed §§ 3173.14 through 3173.21 (commingling) and proposed §§ 3173.22 through 3173.28 (off-lease measurement).

In connection with its creation of a new FMP system, the BLM is proposing to revise its existing well and facility identification provisions at 43 CFR 3162.6(b) and (c) to include a signage requirement for wells on Federal and Indian lands and facilities at which Federal or Indian oil or gas is measured or processed. Additional proposed revisions to § 3162.6 would:

- (1) Make the surveyed-location language in paragraphs (b) and (c) consistent, including a new reference to longitude and latitude; and
  - (2) Remove a sentence in paragraph (b) that provided a grace period for well signs that were in existence on the effective date of the earlier rulemaking
- (2) in which that section was promulgated.

#### Section 3173.13 Requirements for Approved Facility Measurement Points

Proposed § 3173.13 sets forth the requirements that would be applicable to all approved FMPs. Proposed paragraphs (a) and (b) would require operators to stamp or stencil FMP numbers on a fixed plate on specified measurement equipment within 30 days after BLM approval of the FMP, and maintain that stamp/stencil in a legible condition. Under proposed paragraph (c), the operator would be required to use any assigned FMP numbers in reporting and recordkeeping on the first day of the month after an FMP is assigned. Finally, proposed paragraph (d) would require an operator to file a Sundry Notice in connection with any changes or modifications to an approved FMP.

#### Sections 3173.14 through 3173.21 Commingling and Allocation Approvals

As explained below, §§ 3173.14 through 3173.21 of the proposed rule would restrict the instances in which the BLM would approve commingling

and would establish standards that an operator would need to meet to obtain an approval. Current regulations (43 CFR 3162.7–2 and 3162.7–3) require BLM approval before commingling production from a Federal or Indian lease with production from other sources; however, there are no regulations addressing how or under what circumstance commingling should be approved. The requirements proposed in these sections are consistent with and would codify the policy outlined by the BLM in 2013 with respect to commingling approvals in IM 2013–152, “Reviewing Requests for Surface and Downhole Commingling of Oil and Gas Produced from Federal and Indian Leases.” The principal substantive difference between the provisions proposed below and the BLM's existing IM is that the proposed rule would establish a procedure for the BLM to review existing CAAs when the operator applies for approval of an FMP. In contrast, the IM focuses solely on new commingling arrangements.

#### Section 3173.14 Conditions for Commingling and Allocation Approval (Surface and Downhole)

Commingling, for the purpose of this proposed rule, is the combining of production from multiple sources (leases, unit PAs, CAs, or non-Federal or non-Indian properties) before measurement for royalty purposes. For example, an operator may have multiple leases or properties in the same vicinity with a single sales point for all the production from those leases or properties. While the volume measured at the sales point is used to determine royalty due, an allocation method is employed to determine what percentage of that volume is attributable to each lease or property. The allocation percentage is typically determined by dividing the volume or rate of production from a lease, unit PA, or CA by the total volume or rate from all sources. Allocation by volume is determined using allocation meters; allocation by rate is determined through periodic well testing.

Industry often uses the term “commingling” to mean any combining of production before measurement. The industry informal usage could include the combining of production from more than one well on a single lease, unit PA, or CA, and the combining of downhole production from multiple formations, even if they are within the same lease, unit PA, or CA and have the same ownership. For the purpose of this proposed rule, none of these examples would be considered commingling and

this proposed rule would not affect any of them.

The BLM generally uses the term “downhole commingling” to refer to combining production between intervals within a wellbore (see 43 CFR 3162.3–2). Downhole commingling requires BLM approval under that section as a subsequent well operation; however, unless the approval under § 3162.3–2 includes combining production from different leases, unit PAs, or CAs, or production from different geologic formations within the same lease, unit PA, or CA that have different ownership, an operator would not need a separate approval for downhole commingling with respect to production measurement under this proposed rule.

Operators apply for commingling approval for several reasons, including: (1) It can simplify accounting to have the sales point be the same as the point of royalty measurement; (2) Lower operating costs can be achieved by reducing the number of meters required (when using well testing as the allocation method); and (3) Lower operating costs can also be achieved by eliminating the need for separate plumbing and surface equipment (pipelines, separators, dehydrators, compressors, tanks, etc.).

Commingling can also have some advantages for the BLM: (1) More accurate measurement can sometimes be achieved from a meter measuring combined flows due to better-conditioned, more consistent, and higher flow rates than from a single low-volume meter measuring erratic flow with a high potential for multiple phases of fluid; (2) The environmental footprint can be reduced by reducing the need for duplicate surface equipment; and (3) Production accounting can be simplified by reducing the number of meters to inspect and verify.

However, these advantages may be realized without potential negative effects on royalty only if the leases, unit PAs, and CAs being commingled are all 100 percent Federal or are leased 100 percent by the same Indian tribe and are all at the same fixed royalty rate. In that situation, the allocation method is irrelevant because the total amount of Federal or Indian royalty due will be the same regardless of how it is allocated to the individual leases, unit PAs, or CAs included in the commingling approval. Consequently, the BLM can ensure accurate measurement and proper reporting by inspecting and verifying only the sales/royalty meter(s).

On the other hand, if the properties being commingled are not 100 percent Federal or leased 100 percent by the

same Indian tribe, or have different royalty rates, then the method of allocation will affect the royalty due. The same is true of Indian allotted leases in virtually all circumstances. The ownership of Indian allotted leases has descended from the original allottees through several generations to numerous current owners, each owning a small percentage of the royalty interest. A situation in which two allotted leases have the same lessor ownership (*i.e.*, the royalty interests are owned by the same individual allottees in identical proportions) would be extremely rare. Consequently, the method of allocation would affect the royalty due in essentially all circumstances involving allotted leases.

Because the allocation method in these instances has royalty implications, the BLM would have to be able to ensure accurate measurement and proper reporting of all meters or facilities involved in the allocation process. This includes the sales meters and all allocation meters or facilities. Approval of commingling in these situations would greatly increase the workload for the BLM because there could be dozens of allocation meters involved, all of which would be subject to inspection and verification. In addition, the allocation methods are often complex and prone to errors and adjustments which increase the risk of mis-measurement and mis-reporting if commingling were to be permitted.

Commingling production from Federal or Indian leases with production from State or private properties that are not part of a unit or CA introduces additional complexities. Unlike a unit or CA, where the BLM has explicit authority over measurement points on non-Federal or non-Indian properties included in the agreement, the BLM has no authority over measurement points on non-Federal or non-Indian lands whose production would be commingled with production from Federal or Indian leases where no unit or CA exists. Therefore, it would be impossible, as a practical matter, for the BLM to verify that the allocation percentages are correct, regardless of how they were determined.

Not only does commingling in situations where there are potential impacts to royalty make verification more difficult, it also increases the uncertainty of volume and quality measurements of oil and gas removed or sold from the lease, unit PA, or CA. When royalty is based on allocated volumes (whether determined by allocation meter or well testing), it is virtually impossible to achieve or verify the required uncertainty level for the

allocated volumes. For example, when allocation is done by well testing,<sup>6</sup> the royalty-bearing volume of oil and gas is calculated by multiplying the oil and gas measured at the central point of royalty measurement by the allocation percentage obtained through well testing. The uncertainty of the measurement of the allocated volume is the combined uncertainty of the volume measurement at the central point of royalty measurement and the uncertainty inherent in the allocation percentage. The BLM currently has no standards for well testing and, even if it did, the fact that the production remains unmeasured for 29 out of 30 days (in the case of monthly well testing) results in an indeterminate level of uncertainty. For allocation by allocation meter, the uncertainty of the allocation percentage is the cumulative uncertainty of every allocation meter and the central point of royalty measurement.

Based on these considerations, and to ensure that the BLM can verify the measurements on which royalty is based, paragraph (a) of proposed § 3173.14 would generally prohibit the commingling of production from Federal or Indian leases, unit PAs, or CAs, unless all the properties proposed for commingling were 100 percent Federal or leased 100 percent by the same Indian tribe, and at the same fixed royalty rate.

Proposed paragraph (b) sets forth the proposed rule's only two exceptions that would allow commingling outside these circumstances (in other words, where commingling would be allowed if, for example, there is a combination of Federal and non-Federal ownership, or Indian allotted leases are involved, etc.). First, under proposed paragraph (b)(1), the BLM would consider approving commingling for certain low-volume properties. These would be leases, unit PAs, or CAs that do not produce sufficient volumes for the operator to realize, from continued production, a sufficient rate of return on the investment required to achieve non-commingled measurement of volumes produced from the lease, unit PA, or CA, such that a prudent operator would opt to plug a well or shut-in the lease, unit PA, or CA if the commingling request were not approved. In the absence of information demonstrating a different rate, a rate of return less than 10 percent (calculated before Federal,

<sup>6</sup> Well testing involves periodic testing of the production rate for a well, lease, unit, or CA—for example, for 1 or 2 days of each production month. Commingled volumes are then allocated back to the contributing properties according to the relative production rates measured for each of the contributing properties.



State, and local taxes) will be regarded as not sufficient to achieve non-commingled measurement. The BLM may accept a different rate of return if the operator provides sufficient justification. The BLM is seeking comments on the suitability of this rate of return for defining a low-volume property. The BLM would also define a low-volume property as a lease, unit PA, or CA where the cost required to achieve non-commingled production would exceed the net present value of the royalty projected from the lease, unit PA, or CA proposed for commingling over the equipment life.

Second, under proposed § 3173.14(b)(2), the BLM is also proposing to consider approving commingling where overriding considerations indicate that the BLM should approve a commingling application notwithstanding potential negative royalty impacts from commingled measurement. Such situations could include topographic or other environmental considerations that make non-commingled measurement physically impractical or undesirable, in view of where additional measurement and related equipment necessary to achieve non-commingled measurement would have to be located. Proposed paragraph (b)(3) would require the AO to determine whether approving the commingling would be in the public interest, taking into account relevant environmental considerations and production verifiability and accountability.

In connection with these proposed changes, the BLM is proposing to revise 43 CFR 3162.3–2 to differentiate between the combining of production between intervals within a wellbore on the same lease, unit PA, or CA (downhole commingling)—which does not affect production accountability—and the combining of production from different leases, unit PAs or CAs—which does. Proposed revisions to 43 CFR 3162.3–2(a) would make it clear that operators who wish to combine production between intervals within a wellbore on the same lease, unit PA, or CA could continue to seek approval for this activity under that section, and would not need a separate approval under this proposed rule.

#### Section 3173.15 Applying for a Commingling and Allocation Approval

Section 3173.15 of the proposed rule would establish the requirements operators must follow when requesting a CAA and the information they would need to include.

#### Section 3173.16 Existing Commingling and Allocation Approvals

Under proposed § 3173.16, the BLM would be required to review an existing CAA upon receipt of an operator's request for assignment of an FMP number to a facility associated with the CAA. Proposed paragraph (a) would require the BLM to review the existing CAA for consistency with the minimum standards and requirements under proposed § 3173.14. The AO would notify the operator in writing of any inconsistencies or deficiencies.

Under proposed paragraph (b), the operator would have 20 business days to correct any inconsistencies or deficiencies. Under proposed paragraph (c), the BLM could impose new or amended conditions of approval (COAs) on an existing CAA to make it compliant with the requirements of this proposed rule. If the operator fails to correct the deficiencies identified by the BLM, proposed paragraph (d) would allow the AO to terminate the CAA. Under proposed paragraph (e), if the BLM approved a new CAA to replace an existing agreement, it would be effective on the first day of the month following its approval.

The BLM estimates that there are currently approximately 2,600 surface commingling approvals nationally, approximately 300 of which involve commingling production from Federal or Indian leases with production from State or private properties. It is also estimated that there are another approximately 8,000 downhole commingling approvals, 400 of which involve commingling production from Federal or Indian leases with production from State or private properties.

The BLM is proposing a review of existing commingling approvals for two reasons. First, many existing commingling approvals are old and are not well documented. Operators are sometimes unaware of existing commingling approvals or the provisions in the approvals. Second, many approvals have involved allocation methods that are difficult or impossible to inspect and verify for a variety of reasons, including a lack of a well-defined allocation method, overly-complex or unverifiable allocation methods, and the inclusion of properties with allocation meters over which the BLM has no jurisdiction.

The following are some common existing commingling situations that would likely not be approved under this proposed rule unless an operator could show that it meets one of the exceptions identified above. In addition to

describing these situations, the discussion below also identifies alternative arrangements that would help minimize surface impacts:

*Example 1:* Commingling production from Federal or Indian leases with production from State or private properties, using allocation meters on each property.

Under the proposed rule, commingling in this situation would not be approved due to the mixed ownership. However, because existing allocation meters on Federal leases or federally approved units or CAs are already subject to the applicable BLM oil and gas measurement requirements, those meters generally could be used as FMPs to determine royalty value directly instead of being used to determine allocation percentages. As a result, there would be little or no additional surface impacts or significant economic impacts from disallowing such commingling, as the measurement for purposes of royalty would simply occur at the meters that previously had served as allocation meters.

*Example 2:* Commingling production from Federal or Indian leases with production from State or private properties, using well testing as the allocation method.

Under the proposed rule, commingling in this situation again would not be approved due to mixed ownership. The operator would be required to install FMPs to measure the oil and gas sold or removed from each lease, unit PA, or CA. (If there is more than one Federal lease with the same fixed royalty rate or more than one Indian tribal lease 100 percent owned by the same tribe at the same fixed royalty rate, the BLM could approve commingling production from the Federal leases only or from the Indian leases only, but not from both Federal leases and Indian leases.) Installing additional FMPs could require some additional surface disturbance for measurement and treatment equipment. However, well testing typically requires both a test separator and equipment to measure the oil and gas produced during the well test. While permanent separation and measurement equipment for an FMP may require more surface area than the test equipment, the effect on surface area disturbance should be minimal.

*Example 3:* A liquids-gathering system collects commingled production from properties including both Federal or Indian leases and State or private lands, and pipes it to a central off-lease facility for processing and measurement.

This situation often arises as a result of environmental mitigation measures designed to reduce surface impacts,



especially those resulting from tanker-truck traffic transporting oil from tanks located on the lease, unit PA, or CA. Under the proposed rule, commingling in this situation again would not be approved due to mixed ownership. Instead, there would be at least two alternatives that would ensure that the BLM could verify production and at the same time minimize surface impacts:

First, under the proposed rule, a CAA could be obtained for those Federal or Indian leases, unit PAs, and CAs meeting the requirements of § 3173.14 of this proposed rule. Separate lines would be needed to keep Federal or Indian production segregated from State or private production until it was measured at a central processing facility. An off-lease measurement approval under §§ 3173.22 through 3173.24 of this proposed rule would also be required. Some additional surface disturbance would be necessary for the additional pipeline and duplicate separation and measurement equipment at the central location. However, this alternative would eliminate the need for tanks (and the resulting truck traffic), separators, and measurement equipment on-site. If a CAA were not practical, then separate pipelines would be needed for each Federal or Indian lease, unit PA, or CA.

Second, a CAA could be obtained for those Federal or Indian leases, unit PAs, and CAs meeting the requirements of §§ 3173.22 through 3173.24 of this proposed rule. The Federal or Indian oil and gas could be separated and measured on one of the Federal or Indian leases, units PAs, or CAs and then either removed by separate pipelines, or recombined into a single stream and removed in a single pipeline. This would require at least two sets of separators and measurement equipment on the producing properties—one set for the Federal or Indian production, and one set for the State and private production. As with the previous option, however, there would be no tanks on the properties, thereby eliminating truck traffic. This scenario would require that the oil be measured at the outlet of a separator with no associated tank. While this adds some complexity, it has proven to be feasible using technology such as Coriolis meters. If a CAA were not practical, then individual separation and measurement equipment would be needed for each Federal or Indian lease, unit PA, or CA.

#### Section 3173.17 Relationship of a Commingling and Allocation Approval to Royalty-Free Use of Production

Section 3173.17 of the proposed rule would clarify that approval of a CAA does not constitute approval of off-lease royalty-free use of production as fuel in facilities located at an FMP approved under the CAA. Under the currently applicable rule (see Notice to Lessees and Operators of Onshore Federal and Indian Oil and Gas Leases No. 4A (NTL-4A), 44 FR 76600 (Dec. 27, 1979), which implements judicial decisions construing relevant statutory provisions and lease terms), the lessee or operator may claim royalty-free use only for gas or oil used on the same lease, on the unit for the same unit PA, or on the same CA from which the gas or oil was produced. Thus, if an FMP approved under a CAA is located on one of the leases or CAs or units whose production flows to the FMP, the lessee or operator generally may claim royalty-free use only for that portion of the gas or oil used as fuel in facilities at the FMP that corresponds to the portion of the total production flowing to the FMP that is allocable to that lease, CA, or unit, unless the BLM approves “off-lease” royalty-free use of production from other Federal leases, CAs, or units whose production flows to the FMP (see discussion below). Similarly, if the FMP is not on any of the leases or CAs or units whose production flows to the FMP, the lessee or operator may not claim royalty-free use for any of the production used as fuel, absent BLM approval. The lessee or operator could seek such approval for “off-lease” royalty-free use by separate application, as discussed further below.

#### Section 3173.18 Modification of a Commingling and Allocation Approval

Section 3173.18(a) of the proposed rule identifies the circumstances under which all operators who are parties to a CAA may request a modification, including: Changes to the allocation schedule; inclusion of additional leases, unit PAs, or CAs; termination of a lease, unit, or PA within the CAA; or a change in operator. Proposed § 3173.18(b) would identify the information that must be submitted in connection with a modification request.

#### Section 3173.19 Effective Date of a Commingling and Allocation Approval

Section 3173.19(a) and (b) of the proposed rule would identify the effective date of a CAA after the approval of an application or modification, respectively. Proposed § 3173.19(c) would clarify that a CAA

does not modify any of the terms of any leases, unit PAs, or CAs

#### Section 3173.20 Terminating a Commingling and Allocation Approval

Section 3173.20(a) of the proposed rule would provide that any operator who is a party to a CAA may unilaterally terminate it by submitting a Sundry Notice to the BLM. The operator would be required to identify new FMPs for its lease(s), unit PA(s), or CA(s) in the Sundry Notice.

Proposed paragraph (b) would authorize the BLM to terminate an approved CAA for any reason. By way of illustration, the proposed rule identifies certain circumstances in which the BLM might exercise that authority, such as when there have been changes in technology, regulation, or policy, or the operator has not complied with the terms of the CAA. Proposed paragraph (c) would provide for automatic termination of a CAA if only one lease, unit PA, or CA remains in the CAA.

After termination, proposed paragraph (d) would require the BLM to notify in writing all operators who are party to the CAA of the effective date of the termination and the reasons for it. Under proposed paragraph (e), upon termination, each lease, unit PA, or CA, would revert to separate on-lease measurement, unless off-lease measurement is approved under §§ 3173.22 through 3173.28 of this proposed rule.

#### Section 3173.21 Combining Production Downhole in Certain Circumstances

Section 3173.21 of the proposed rule would identify certain circumstances in which downhole comingling would be subject to the requirements of this proposed rule. Under proposed paragraph (a)(1), the combination of production from a single well drilled into different hydrocarbon pools or geologic formations under separate adjacent properties, regardless of ownership, where none of the pools or formations are common to more than one of the properties, would constitute comingling under the proposed rule. If, on the other hand, the pools or geologic formations are common to more than one property, then under proposed paragraph (a)(2), the operator would be required to establish a unit PA or communitization agreement as opposed to obtaining a CAA. Proposed paragraph (b) would clarify that combining production downhole from different geologic formations on the same lease from a single well, while requiring AO approval, is not

considered commingling for purposes of this proposed rule, unless those formations have different ownership.

#### Sections 3173.22 through 3173.28 Off-Lease Measurement Approvals

Sections 3173.22 through 3173.28 of the proposed rule would establish the circumstances in which the BLM would approve measurement of production off the lease, unit, or CA (referred to as “off-lease measurement”). Under the BLM’s existing regulations (43 CFR 3162.7–2 (oil) and 43 CFR 3162.7–3 (gas)), all measurement must be on-lease, unit, or CA, unless otherwise authorized by the BLM. However, there are currently no national standards that operators must meet when applying for off-lease measurement. Neither Order 3 nor other regulations address how or under what circumstances the BLM will approve off-lease measurement. The proposed provisions below would provide such standards.

#### Section 3173.22 Requirements for Off-Lease Measurement

Off-lease measurement has led to much confusion over the location of measurement points. Many existing meters measure commingled Federal, private, and State production, which the operators allocate back to the individual lease, unit PA, CA, or CAA located upstream. These off-lease central-delivery-point allocation systems have led to significant discrepancies between operator-allocated volumes, which operators report to ONRR, and the volumes that the BLM calculates during follow-up audits. In the absence of a national standard for off-lease measurement, BLM State Offices have created their own standards, which are not consistent.

Section 3173.22 of this proposed rule would establish conditions under which off-lease measurement would be approved. Under this proposed section, the BLM would allow off-lease measurement of production only from a single Federal or Indian lease, unit PA, CA, or CAA, and only at an approved FMP. This proposal could restrict the types of situations in which off-lease measurement could occur, and therefore could result in the construction of facilities (*i.e.*, meters) that previously would not have been required under existing practice. Although the BLM generally prefers to limit the number of facilities and surface disturbances that occur on Federal leases, the BLM believes that limiting the use of off-lease measurement would provide for more accurate accounting of oil and gas production as required by Section 101(a) of FOGMA, 30 U.S.C. 1711(a).

#### Section 3173.23 Applying for Off-Lease Measurement

Section 3173.23 of the proposed rule would establish the requirements operators must follow when applying for an off-lease measurement approval or amending an existing approval, including required supporting information and related documentation.

#### Section 3173.24 Effective Date of an Off-Lease Measurement Approval

Proposed § 3173.24 would provide that off-lease measurement approvals are effective immediately, unless the BLM specifies a different effective date in the approval.

#### Section 3173.25 Existing Off-Lease Measurement Approval

Under this proposed section, an existing off-lease measurement approval would be reviewed upon receipt of an operator’s request for the assignment of an FMP number to a facility associated with the off-lease measurement approval. Proposed § 3173.25(a) would require the BLM to review the existing off-lease measurement approval for consistency with the minimum standards and requirements in proposed § 3173.22. The AO would notify the operator in writing of any inconsistencies or deficiencies. Under proposed paragraph (b), the operator would have to correct the inconsistencies or deficiencies within 20 business days. Under proposed paragraph (c), in connection with approving the requested FMP, the BLM could impose new or amended COAs on an existing off-lease measurement approval to make it consistent with the requirements of this proposed rule. If the operator fails to correct the deficiencies, proposed paragraph (d) would allow the AO to terminate the off-lease measurement approval. Under proposed paragraph (e), if the BLM approves a new off-lease measurement arrangement, that new arrangement would be effective on the first day of the month following its approval.

The BLM estimates that for FY 2014, there were approximately 25,404 producing onshore Federal and Indian leases, unit PAs, and CAs. Of those, approximately 1,500 have off-lease measurement approvals where there is no commingling (in situations, for example, where the well is located in difficult-to-access or environmentally sensitive area). The BLM anticipates that a few of these off-lease measurement points may not meet the minimum standards of this rule and would not be re-approved. If any existing off-lease measurement point is

not re-approved under the proposed rule, the lessee or operator would be required to move the measurement facilities back on-lease or install new measurement facilities on-lease.

#### Section 3173.26 Relationship of Off-Lease Measurement Approval to Royalty-Free Use of Production

Section 3173.26 of the proposed rule would clarify that approval of off-lease measurement does not constitute approval of off-lease royalty-free use of production as fuel in facilities located at an approved off-lease FMP. Under NTL-4A, as noted above, the lessee or operator may claim royalty-free use only for gas or oil used on the same lease, on the unit for the same unit PA, or on the same CA from which the gas or oil was produced. Thus, the lessee or operator may not claim royalty-free use for any of the production used as fuel at an off-lease FMP, absent BLM approval. The lessee or operator could seek such approval by separate application.

#### Section 3173.27 Termination of Off-Lease Measurement Approval

Section 3173.27(a) of the proposed rule would provide that an operator may terminate an off-lease measurement arrangement through the submittal of a Sundry Notice to the BLM, which would have to identify the new FMPs for the lease(s), unit(s), or CA(s) that had been subject to the off-lease measurement approval. Proposed paragraph (b) of this section would authorize the BLM to terminate an approved off-lease measurement arrangement for any reason. By way of illustration, this proposed paragraph would identify certain circumstances under which the BLM might exercise that authority. Proposed paragraph (c) would provide that the BLM would notify the operator in writing of the termination of the off-lease measurement approval, the reasons for termination, and the effective date of the termination. Under proposed paragraph (d), after termination, each lease, unit, or CA that was subject to the off-lease measurement approval would revert to on-lease measurement.

#### Section 3173.28 Instances Not Constituting Off-Lease Measurement, for which No Approval Is Required

Section 3173.28 of the proposed rule would identify two circumstances that would not be considered off-lease measurement for purposes of the proposed rule. The first is where an FMP is located on a well pad of a directionally-drilled well that produces oil or gas from a lease, unit, or CA on which the well pad is not located. The

second is where a lease, unit, or CA is made up of separate non-contiguous tracts. If production is moved from one tract to another tract within the same lease, unit, or CA, and the production is not diverted during movement between the tracts before the FMP (except for production used royalty-free), measurement would not be considered to be off-lease measurement.

#### Section 3173.29 Immediate Assessments for Certain Violations

Proposed § 3173.29 would expand the number and types of violations that would be subject to immediate assessments. Currently, BLM regulations at 43 CFR 3163.1(b) identify three violations that warrant immediate assessments. Section IV. of Order 3 identifies one further violation that results in an immediate assessment. The existing immediate assessments are not civil penalties and are separate from the civil penalties authorized under Section 109 of FOGMA, 30 U.S.C. 1719.

The authority for the BLM to impose these assessments was explained in the preamble to the final rule in which 43 CFR 3163.1 was originally promulgated in 1987:

The provisions providing assessments have been promulgated under the Secretary of the Interior's general authority, which is set out in Section 32 of the Mineral Leasing Act of 1920, as amended and supplemented (30 U.S.C. 189), and under the various other mineral leasing laws. Specific authority for the assessments is found in Section 31(a) of the Mineral Leasing Act (30 U.S.C. 188(a)), which states, in part "... the lease may provide for resort to [sic] appropriate methods for the settlement of disputes or for remedies for breach of specified conditions thereof." All Federal onshore and Indian oil and gas lessees must, by the specific terms of their leases which incorporate the regulations by reference, comply with all applicable laws and regulations. Failure of the lessee to comply with the law and applicable regulations is a breach of the lease, and such failure may also be a breach of other specific lease terms and conditions. Under Section 31(a) of the Act and the terms of its leases, the BLM may go to court to seek cancellation of the lease in these circumstances. However, since at least 1942, the BLM (and formerly the Conservation Division, U.S. Geological Survey), has recognized that lease cancellation is too drastic a remedy, except in extreme cases. Therefore, a system of liquidated damages was established to set lesser remedies in lieu of lease cancellation.

The BLM recognizes that liquidated damages cannot be punitive, but are a reasonable effort to compensate as fully as possible the offended party, in this case the lessor, for the damage resulting from a breach where a precise financial loss would be difficult to establish. This situation occurs when a lessee fails to comply with the

operating and reporting requirements. The rules, therefore, establish uniform estimates for the damages sustained, depending on the nature of the breach.

53 FR 5384, 5387 (Feb. 20, 1987). The immediate assessments reflect a recognition that the BLM continues to incur costs associated with correcting violations of lease terms and regulations.

The additional assessments in this proposed rule address violations that pose particular threats to the integrity of the BLM's production accounting system. These are violations that significantly increase the BLM's workload and enforcement costs. Accordingly, the BLM proposes to make the 10 violations listed in proposed § 3173.29 subject to immediate assessments.

Three immediate assessments would apply to purchasers and transporters as well as operators. This extension is being proposed because they pertain to operational functions on the lease site that a purchaser or transporter may, in some circumstances, perform instead of the operator—e.g., removing a Federal seal without authorization (proposed § 3173.4) or failure to report theft or mishandling of production (proposed § 3173.8). Extending responsibility to purchasers and transporters with respect to functions they perform also implements the site security provisions of Section 102(b) of FOGMA, 30 U.S.C. 1712(b), which require operators to develop and comply with site security plans, or minimum site security measures that the Secretary deems appropriate, that are designed to protect the oil or gas produced or stored on an onshore lease site from theft. Thus, the authority for these requirements is found in both the general rulemaking authority of the various mineral leasing statutes (including the MLA at 30 U.S.C. 189 and the Mineral Leasing Act for Acquired Lands at 30 U.S.C. 359) and the rulemaking authority in Section 301(a) of FOGMA, 30 U.S.C. 1751(a).

The recordkeeping requirements imposed on purchasers and transporters in § 3170.7 of the proposed rule discussed above are imposed under Section 103(a) of FOGMA, 30 U.S.C. 1713(a). Similar to the authority granted in the MLA at 30 U.S.C. 189, the general rulemaking authority of FOGMA Section 301(a) provides authority for the BLM to impose immediate assessments on purchasers and transporters who fail to follow the proposed new requirements for recordkeeping and records maintenance.

All of the immediate assessments under this proposed rule would be set

at \$1,000 per violation. The BLM chose the \$1,000 figure because it generally approximates what it would cost the agency on average to identify and document a violation and verify remedial action and compliance.

#### Enforcement Actions

This proposal would remove the enforcement, corrective action, and abatement period provisions of Order 3. In their place, the BLM would develop an internal inspection and enforcement handbook that would provide direction to BLM inspectors on how to classify a violation—as either major or minor—what the corrective action should be, and what the timeframes for correction should be. The proposed rule would take the approach that the violation's severity and corrective action timeframes should be decided on a case-by-case basis, determined based on the definitions in the regulations. In deciding how severe a violation is, BLM inspectors must take into account whether a violation could result in "immediate, substantial, and adverse impacts on public health and safety, the environment, production accountability, or royalty income." (Definition of "major violation," 43 CFR 3160.0–5.) The AO would use the enforcement handbook in conjunction with 43 CFR subpart 3163, which provides for assessments and civil penalties when lessees and operators fail to remedy their violations in a timely fashion, and for immediate assessments for certain violations.

#### Elimination of Self Inspections

The BLM is proposing to eliminate the self-inspection provision of Order 3, section III.F., because it has been impractical for the BLM to enforce. Order 3 requires a lessee or operator to establish an inspection program for the purpose of periodically measuring production volumes and assuring that there is compliance with the BLM's minimum site security requirements. However, Order 3's language is vague and the BLM has never supplemented it with internal guidance or enforcement policy. As a result, the BLM determined this requirement was of limited utility. In lieu of reworking or updating this requirement, this proposed rule would strengthen recordkeeping requirements for operators, transporters, and purchasers, which the BLM believes will ultimately accomplish the same results and be of more use going forward.

**Miscellaneous changes to other BLM regulations in 43 CFR part 3160**

As noted at the beginning of this section-by-section analysis, the BLM is proposing other changes to provisions in 43 CFR part 3160. Some of those have already been discussed above in connection with provisions of this proposed rule to which they relate. The remaining proposed revisions are those noted here.

1. The authority citation for part 3160 would be corrected to include 25 U.S.C. 396, the grant of rulemaking authority to the Secretary for allotted Indian leases, which does not appear in the current print edition of the CFR.

2. Section 3160.0–3, Authority, would be updated to include the amendments to the Federal Oil and Gas Royalty Management Act of 1982 enacted by the Federal Oil and Gas Royalty Simplification Act of 1996.

3. Section 3161.1, Jurisdiction, would be updated to include references to FMPs, the Indian Mineral Development Act, and Tribal Energy Resource Agreements. The revisions would also mirror the new language in proposed § 3170.2.

4. Section 3162.3–2 would be revised by adding a new paragraph (d), which would refer operators to proposed provisions in subpart 3173 for details on how to apply for approval of FMPs, surface or subsurface commingling from different leases, unit PAs and CAs, or off-lease measurement.

5. Section 3162.4–3, the provisions regarding the no-longer-used Form 3160–6 (the monthly report of operations) would be removed.

6. Section 3162.6, Well and facility identification, would be revised to correct the misspelled word “indentification” in paragraph (a) to

read “identification.” Paragraph (b) would be revised to remove a provision allowing abbreviated sign designations and a “grandfathering” provision for old well signs. Paragraph (c) would be revised to extend signage requirements to include facilities at which oil or gas produced from Federal or Indian leases is stored or processed. The fifth sentence of the current paragraph (c) would become the new paragraph (d), with its wording revised. The current paragraph (d) would become paragraph (e).

7. Section 3162.7–5, Site security on Federal and Indian (except Osage) oil and gas leases, would be removed. The provisions in the proposed rule that correspond to, or cover the same subject matter as, the several paragraphs in § 3162.7–5 are shown in the following table:

**BILLING CODE 4310–84–C**

<u>43 CFR 3162.7-5 paragraph</u>	<u>Proposed new provision</u>
(a) Definitions	43 CFR 3173.1
(b)(1) Lines and valves; effective sealing	43 CFR 3173.2(a), 3173.9(b) and 3173.11(c)(7)
(b)(2) LACT meters and effective sealing of components	43 CFR 3170.4, 3173.3, and two sections in anticipated new subpart 3174
(b)(3) By-passes around meters	43 CFR 3170.4
(b)(4) Sealing of appropriate valves during oil measurement by hand gauging	43 CFR 3173.2(a) and (b)
(b)(5) Circulating lines with valves allowing access to remove oil from storage tanks	43 CFR 3173.1
(b)(6) Records retention requirements	43 CFR 3170.7
(b)(7) Removal of oil for transportation by vehicle and required documentation	43 CFR 3173.5
(b)(8) Reporting theft or mishandling of oil	43 CFR 3173.8
(b)(9) Variances	43 CFR 3170.6
(c) Site security plans	None (site security plans eliminated)
(d) Site facility diagrams	43 CFR 3173.11

**BILLING CODE 4310-84-P**

8. Section 3163.2, Civil penalties, would be rewritten to address purchasers and transporters who are not operating rights owners. Paragraph (k) would be amended to change “shall” to “will” and to remove the references to “other liquid hydrocarbons,” because other liquid hydrocarbons would be encompassed within the definition of the term “oil” in proposed § 3170.3.

9. Section 3164.1, Onshore Oil and Gas Orders, would be revised to remove the reference to Order No. 3, Site Security, from the table in paragraph (b) because the Order would be replaced by this codified proposed rule.

**Onshore Order Public Meetings, April 23–24, 2013**

On April 24 and 25, 2013, the BLM held a series of public meetings to discuss proposed revisions to Orders 3,

and 5. The meetings were webcast so tribal members, industry, and the public across the country could participate and ask questions either in person or over the internet. Following the forum, the BLM opened a 36-day informal comment period, during which 13 comment letters were submitted. The following summarizes comments the BLM received relating to Order 3 and our response:

1. *The BLM should use the API number or the LR (Legacy Rehost) 2000 system serial number rather than create a new FMP numbering system.*

The BLM disagrees with this suggestion and believes that this suggestion would be unworkable. The BLM and State regulators use API numbers to identify individual wells while at the same time the BLM uses LR 2000 system serial numbers to identify

leases. The BLM’s proposed FMP numbering system would be used to identify facilities (meters) that serve any number of wells and leases, and whose measurements affect the calculation of the volume or quality of production on which royalty is owed. The FMP numbers would be based on an FMP numbering system that the former Minerals Management Service developed for offshore production reporting. ONRR continues to use that system. The FMP numbering system used by ONRR will generate numbers that indicate whether a lease is onshore or offshore, the mineral produced (oil or gas), whether the measurement is commingled or off-lease, and other relevant information. The BLM believes that using the same FMP numbering system for production reporting for onshore leases likely will save time and

money by developing a system compatible with that already in use by ONRR.

*2. Clarify the level of detail on site facility diagrams involving royalty-free use.*

The BLM agrees with this comment. In light of this suggestion, the BLM is proposing that the operator identify each piece of equipment powered by production from the lease, unit, or CA. If the operator claims royalty-free volumes, the diagram (or an attachment) would have to state the estimated volume the equipment consumes per day and per month, how the volume is determined, the equipment manufacturer's name, rated use, and equipment serial number. (Alternatively, the royalty-free volume used by the equipment could be measured.) The proposed rule includes a number of general sample site facility diagrams.

*3. Reduce the level of detail required on site facility diagrams for equipment used to determine quality and quantity of production.*

The BLM agrees with this comment. The proposed rule would require the operator to submit the relevant information regarding meters and other measurement equipment when it requests an FMP designation or amends an existing FMP. Thus, requiring this information on the site facility diagrams is unnecessary.

*4. "Grandfather" existing approvals for off-lease measurement and commingling, and "grandfather" existing site facility diagrams.*

The BLM believes that a "grandfathering" approach is not workable. "Grandfathering" would result in a patchwork of multiple and incompatible requirements. The BLM would have to track which approvals were grandfathered. The BLM is proposing to update commingling approval requirements because existing requirements have proven problematic in ensuring and verifying accurate measurement. If existing approvals were "grandfathered," updated requirements would come into effect only incrementally and over many years as new facilities came on line and older facilities were modified.

*5. "Grandfather" existing equipment and Order 3 requirements.*

The BLM disagrees with this comment. Grandfathering is generally unworkable for two reasons. First, grandfathering results in two tiers of equipment—older equipment that must meet the standards of a rule that is no longer in effect and newer equipment that has to meet the standards of the new rule. This not only requires the

BLM to maintain, inspect against, and enforce two sets of regulations (one of which no longer applies to equipment coming into service), but also to track which FMPs have been grandfathered and which are subject to the new regulations. Second, the purpose for promulgating new regulations is to ensure accurate and verifiable measurement of oil and gas removed or sold from Federal and Indian leases. In lieu of grandfathering, the BLM has proposed grace periods for bringing existing facilities into compliance with the proposed standards (see §§ 3173.12, 3173.16, and 3173.25). These grace periods would be tied to volumes measured by the soon-to-be-designated FMPs, giving lower-volume operations more time to apply for their FMPs.

*6. Determine if commingling is economically justified by using net present value of investment cost of non-commingled measurement in lieu of a rate-of-return method (used in this proposed rule), and that if the net present value of the investment cost was less than 1.5 times the investment, then commingling should be approved.*

The BLM requested clarification of this comment to analyze the potential impacts of the proposed method. However, the BLM received no response to its inquiry. Consequently, the BLM does not believe it has an adequate basis on which to propose such a method. In connection with this proposed rule, the BLM would be interested in any information regarding alternate methods for determining if commingling is economically justified.

*7. The economic analysis of a request for commingling approval should consider all costs of lease development and not just the costs associated with achieving non-commingled measurement.*

The BLM disagrees with this comment. The BLM believes this would be unworkable, time-consuming, and expensive, as well as inaccurate with respect to the issue addressed. The BLM would not have access to all of the drilling and development costs, the calculations would be inordinately complex, and those costs in any event are not determinative of whether commingled measurement is economically justified. Whether commingled measurement is economically justified is a function of the marginal cost difference between commingled measurement and non-commingled measurement.

*8. The BLM should not take enforcement actions against purchasers and transporters for not maintaining and submitting records.*

The BLM disagrees with this comment. The requirement for purchasers and transporters to maintain records is imposed by FOGMA. This proposed rule would affect approximately 200–300 purchasers and transporters, but as explained earlier, the BLM believes it is necessary to support the BLM's production verification and accountability efforts.

*9. Immediate assessments are arbitrary, ambiguous, and unnecessary.*

The BLM disagrees with this comment. The specific immediate assessments proposed and the reasons for proposing them are discussed earlier.

*10. The BLM Enforcement Manual should be made public.*

The BLM agrees with this comment. The Enforcement Manual will be posted on the BLM Web site at approximately the same time as the effective date of the final rule.

#### IV. Procedural Matters

*Executive Orders 12866 and 13563, Regulatory Planning and Review*

Executive Order 12866 provides that the Office of Information and Regulatory Affairs (OIRA) will review all significant rules. OIRA has determined that this rule is not significant.

Executive Order 13563 reaffirms the principles of E.O. 12866 while calling for improvements in the nation's regulatory system to promote predictability, to reduce uncertainty, and to use the best, most innovative, and least burdensome tools for achieving regulatory ends. The executive order directs agencies to consider regulatory approaches that reduce burdens and maintain flexibility and freedom of choice for the public where these approaches are relevant, feasible, and consistent with regulatory objectives. E.O. 13563 emphasizes further that regulations must be based on the best available science and that the rulemaking process must allow for public participation and an open exchange of ideas. We have developed this proposed rule in a manner consistent with these requirements.

1. The proposed rule would not have an annual effect on the economy of \$100 million or more or adversely affect in a material way the economy, a sector of the economy, productivity, competition, jobs, the environment, public health or safety, or State, local, or tribal governments or communities.

The requirement for more detailed site facility diagrams is the most significant proposed provision that could increase the cost associated with the development of Federal and Indian

oil and gas leases. The BLM already requires Federal and Indian oil and gas producers to provide generalized diagrams that show each piece of equipment that is used at a facility, including connections between each piece of equipment, and valve positions on production storage tanks. Under this proposed rule, operators would be required to submit new diagrams that also show additional information. Companies may incur additional costs associated with verifying and submitting this information and new diagrams.

The BLM estimates that 3,700 operators would submit approximately 125,000 new diagrams when the requirement is first implemented and that it would take the BLM approximately 3 years to process the submissions. The total one-time cost to the regulated community would be approximately \$63.3 million, spread over 3 years. An operator would be required to submit the new diagrams for a facility that is in service before the final rule's effective date within 30 days after the BLM assigns the FMP number(s) to that facility. An operator would be required to submit the new diagrams for a new facility (*i.e.*, one not yet in service on the effective date of the final rule) within 30 days after construction of the facility. On an ongoing basis, the BLM estimates operators would submit about 5,000 new diagrams per year for a total annual cost to the regulated community of \$2.5 million. Once incorporated into the submission and review process, this requirement should not significantly change costs for the BLM, lessees, operators, purchasers, or transporters.

Another proposed administrative change in this rule would require operators, within 27 months after the effective date of the final rule, to obtain BLM-issued FMP numbers, which would be used for labeling facilities and for reporting. Currently, companies have their own individualized internal systems for identifying facilities where production is measured for determining royalty. The BLM anticipates that 3,700 operators would submit 220,000 initial applications for the new FMP numbers, which operators would then stamp or stencil on a fixed plate. It would take the BLM approximately 3 years to process the FMP applications. The BLM estimates there would be a total one-time cost to the regulated community of approximately \$55.7 million to convert to the new numbering system, which would be spread over 3 years. On an ongoing basis, the BLM anticipates operators would submit approximately 4,000 new and amended FMP

applications each year, for an approximate cost to the regulated community of \$1 million per year.

This proposed rule would establish new requirements associated with lessees and operators commingling production from different leases, CAs, or PAs, and in some instances existing commingling approvals would be modified. Of the approximately 10,541 existing commingling approvals, the BLM anticipates that only 710 of them would not meet the new requirements because they include private and State leases whose production is commingled with production from Federal or Indian oil and gas leases. Under the proposed rule, the BLM would modify or terminate these unless the operator could demonstrate that the cost of achieving non-commingled measurement would not be economically recoverable based on the low volume of oil and gas produced or could show other extenuating circumstances.

The BLM estimates that 50 percent, or 355, of the existing approvals that do not meet the proposed new requirements would remain in place due to their low production volumes and the other 50 percent would be terminated or modified. Measuring equipment, most likely allocation meters, serving the terminated arrangements would have to be converted into FMPs and updated to meet the new oil and gas measurement standards that the BLM anticipates proposing as separate rules that would be codified at new 43 CFR subparts 3174 and 3175. The costs for upgrading measuring equipment would be most appropriately discussed in the preambles and economic analyses supporting those proposed rules. Operators could incur some administrative costs associated with converting allocation meters into FMPs if they wish to continue to use these facilities for their own internal allocation purposes. For new and modified commingling agreements, we anticipate the proposed revision would increase industry costs by about \$5.1 million per year.

Proposed new records management requirements could, depending on individual business practices, have a small direct economic impact on lessees, operators, transporters, and purchasers. These minor added expenses would primarily relate to incorporating the new requirements into existing records management practices and procedures. An estimated 200 to 300 purchasers and transporters would have new recordkeeping responsibilities under this proposed rule. It is highly

probable that purchasers and transporters are already compiling records that would, for the most part, satisfy the proposed requirements. The BLM believes that these new recordkeeping requirements would impose a minimal cost on the regulated community.

Expanded recordkeeping requirements pertaining to water-draining and hot-oiling operations would cost lessees and operators approximately \$1.2 million per year in annual ongoing costs. This change would enhance production accountability by making it easier for the BLM to verify the volumes of water that operators drain from storage tanks and the volumes of oil that they temporarily remove from storage, use for operational purposes, and then return to storage.

The fifth and final provision that would involve a direct cost to the regulated community is a proposal that would establish new requirements that would apply to lessees and operators who measure production off-lease, but who are not part of any commingling approval. Of the approximately 1,500 existing off-lease measurement approvals, the BLM estimates that less than 5 percent would be terminated or modified because they do not meet the standards of the proposed rule. Operators of those leases, CAs, or units that do not meet the new requirements would have to install and maintain new meters on the lease, CA, or unit. The BLM estimates that the cost of moving or installing new meters on the lease, CA, or unit would be \$20,000 per measurement point, for a one-time total cost to industry of \$1.6 million.

This proposed rule would increase the number of categories of violations where immediate assessments could be imposed. The BLM anticipates enforcement actions and immediate assessments would continue to be relatively infrequent occurrences.

To accommodate the issuance of FMP numbers and the inclusion of purchasers and transporters within certain of the rule's requirements, the BLM would need to enhance AFMSS, the BLM's main oil and gas data system. The BLM would also experience an increased workload associated with issuing FMP numbers, diagram reviews, and other administrative requirements. The BLM estimates a one-time cost, spread over a 3-year period, to the BLM of about \$29.1 million to implement the proposed changes. On an ongoing basis the BLM estimates its costs would increase by about \$3.4 million per year.

In total, the BLM estimates these requirements would increase operator

annual expenses by approximately \$13.5 million. In addition, there would be a one-time cost to implement the new provisions of about \$121.5 million. The one-time implementation costs would be spread over 3 years, or about \$40 million per year.

2. The proposed rule would not create inconsistencies with other agencies' actions. It would not change the relationships of the BLM to other agencies and their actions.

3. The proposed rule would not materially affect entitlements, grants, user fees, or loan programs, or the rights and obligations of their recipients. The proposed rule does not address any of these programs or issues.

4. The proposed rule would not raise novel legal or policy issues arising out of legal mandates, the President's priorities, or the principles set forth in the Executive Order.

#### *Regulatory Flexibility Act*

The BLM certifies that this proposed rule would not have a significant economic effect on a substantial number of small entities as defined under the Regulatory Flexibility Act (5 U.S.C. 601 *et seq.*). The Small Business Administration (SBA) has developed size standards to carry out the purposes of the Small Business Act and those size standards can be found at 13 CFR 121.201. Small entities for mining, including the extraction of crude oil and natural gas, are defined by the SBA as an individual, limited partnership, or small company considered being at "arm's length" from the control of any parent companies, with fewer than 500 employees.

Of the 6,628 domestic firms involved nationwide in oil and gas extraction, 99 percent, or 6,530, had fewer than 500 employees. There are another 10,160 firms involved nationwide in drilling and other support functions. Of the firms providing support functions, 98 percent of those firms had fewer than 500 employees. Based on this national data, the preponderance of firms involved in developing on-shore oil and gas resources are small entities as defined by the SBA.

In addition to lessees and operators, the BLM must consider the size of the purchasers' and transporters' firms. There are multiple North American Industry Classification System (NAICS) categories that could include firms involved in the purchasing and transporting of petroleum from Federal and Indian leases. For example, some purchasers could be petroleum refiners. For petroleum refiners, the SBA standard says a small business cannot have more than 1,500 employees or

more than 125,000 barrels per calendar day total Operable Atmospheric Crude Oil Distillation capacity. Capacity includes owned or leased facilities as well as facilities under a processing agreement or an arrangement such as an exchange agreement or a throughput agreement. For wholesalers, including petroleum wholesalers, the SBA standard for a small entity is one that has fewer than 100 employees. For truck transporters, the SBA defines a small entity as a firm with less than \$27.5 million in annual receipts. For natural gas pipeline operators, the standard is a maximum of \$27.5 million in receipts per year. For crude oil pipelines the standard is fewer than 1,500 employees.

As discussed above, national data, including number of firms, number of employees by firm, and annual receipts by firm, is not discretely identified for purchasers and transporters of petroleum or natural gas. The potentially affected purchasers and transporters would likely be a minor component in any number of the relevant NAICS categories. Of the few NAICS categories where reported employment, receipt, and production data matches up with the SBA size standards, the preponderance of the firms would be considered small entities as defined by the SBA.

Based on the available national data, the preponderance of firms involved in developing, producing, purchasing, and transporting oil and gas from Federal and Indian lands are small entities as defined by the SBA. As such, it appears a substantial number of small entities would be potentially affected by the proposed rule to some degree.

Using the best available government data, the BLM estimates there are approximately 3,700 lessees and operators conducting operations on Federal and Indian lands that could be affected by the proposed rule. Additionally, the BLM estimates there are approximately 200 to 300 purchasers and transporters operating on Federal and Indian lands that potentially could be affected by this proposed rule.

In addition to determining whether a substantial number of small entities are likely to be affected by this rule, the BLM must also determine whether the rule is anticipated to have a significant economic impact on those small entities. Based on its analysis, the BLM anticipates the cost of implementing the proposed provisions to potentially reduce the average annual net income of impacted small entities by less than 0.001 percent. Except for the electronic filing requirement, all of the proposed provisions would apply to entities regardless of size. However, entities

with the greatest activity would likely experience the greatest increase in compliance costs. As a general matter, smaller business entities are more likely to operate a smaller number of sites and FMPs for which they would have to submit the information and documentation that this proposed rule would require. Copies of the analysis can be obtained from the contact person listed earlier (see **FOR FURTHER INFORMATION CONTACT**).

Based on the available information, we conclude that the proposed rule would not have a significant impact on a substantial number of small entities. Therefore, a final Regulatory Flexibility Analysis is not required, and a Small Entity Compliance Guide is not required.

#### *Small Business Regulatory Enforcement Fairness Act*

This proposed rule is not a major rule under 5 U.S.C. 804(2), the Small Business Regulatory Enforcement Fairness Act. This rule would not have an annual effect on the economy of \$100 million or more. As explained in the discussion above concerning Executive Order 12866, Regulatory Planning and Review, changes in the proposed rule would increase the ongoing cost associated with the development of Federal and Indian oil and gas resources by an estimated \$13.5 million annually for all operators together. In addition, there would be a one-time cost to implement the new provisions of about \$121.5 million. The one-time implementation costs would be spread over 3 years, or about \$40 million per year.

This rule proposes to replace Order 3 to ensure that oil and gas produced from Federal and Indian leases is properly and securely handled so that these resources are accurately accounted for.

This proposed rule:

- Would not cause a major increase in costs or prices for consumers, individual industries, Federal, State, tribal, or local government agencies, or geographic regions; and
- Would not have significant adverse effects on competition, employment, investment, productivity, innovation, or the ability of U.S.-based enterprises to compete with foreign-based enterprises.

#### *Unfunded Mandates Reform Act*

In accordance with the Unfunded Mandates Reform Act (2 U.S.C. 1501 *et seq.*), the BLM finds that:

- This proposed rule would not "significantly or uniquely" affect small governments. A Small Government Agency Plan is unnecessary.



- This proposed rule would not produce a Federal mandate of \$100 million or greater in any single year.

The proposed rule is not a “significant regulatory action” under the Unfunded Mandates Reform Act. The changes proposed in this rule would not impose any requirements on any non-Federal governmental entity.

*Executive Order 12630, Governmental Actions and Interference With Constitutionally Protected Property Rights (Takings)*

Under Executive Order 12630, the proposed rule would not have significant takings implications. A takings implication assessment is not required. This proposed rule would set minimum standards for ensuring that oil and gas produced from Federal and Indian (except the Osage Tribe) oil and gas leases are properly and securely handled, so as to prevent theft and loss and to enable accurate measurement and production accountability. All such actions are subject to lease terms which expressly require that subsequent lease activities be conducted in compliance with applicable Federal laws and regulations. The proposed rule conforms to the terms of those Federal leases and applicable statutes, and as such the proposed rule is not a governmental action capable of interfering with constitutionally protected property rights. Therefore, the proposed rule would not cause a taking of private property or require further discussion of takings implications under this Executive Order.

*Executive Order 13132, Federalism*

In accordance with Executive Order 13132, the BLM finds that the proposed rule would not have significant Federalism effects. A Federalism assessment is not required. This proposed rule would not change the role of or responsibilities among Federal, State, and local governmental entities. It does not relate to the structure and role of the states and would not have direct, substantive, or significant effects on states.

*Executive Order 13175, Consultation and Coordination with Indian Tribal Governments*

Under Executive Order 13175, the President’s memorandum of April 29, 1994, “Government-to-Government Relations with Native American Tribal Governments” (59 FR 22951), and 512 Departmental Manual 2, the BLM evaluated possible effects of the proposed rule on federally recognized Indian tribes. The BLM approves proposed operations on all Indian

onshore oil and gas leases (other than those of the Osage Tribe). Therefore, the proposed rule has the potential to affect Indian tribes. In conformance with the Secretary’s policy on tribal consultation, the BLM held three tribal consultation meetings to which more than 175 tribal entities were invited. The consultations were held in:

- Tulsa, Oklahoma on July 11, 2011;
  - Farmington, New Mexico on July 13, 2011; and
  - Billings, Montana on August 24, 2011.
- In addition, the BLM hosted a tribal workshop and webcast on April 24, 2013.

The purpose of these meetings was to solicit initial feedback and preliminary comments from the tribes. Comments from the tribes will continue to be accepted and consultation will continue as this rulemaking proceeds. To date, the tribes have expressed concerns about the subordination of tribal laws, rules, and regulations to the proposed rule; tribes’ representation on the Department of the Interior’s Gas and Oil Measurement Team; and the BLM’s Inspection and Enforcement program’s ability to enforce the terms of this proposed rule. While the BLM will continue to address these concerns, none of the concerns expressed affect the substance of the proposed rule.

*Executive Order 12988, Civil Justice Reform*

Under Executive Order 12988, the Office of the Solicitor has determined that the proposed rule would not unduly burden the judicial system and meets the requirements of Sections 3(a) and 3(b)(2) of the Order. The Office of the Solicitor has reviewed the proposed rule to eliminate drafting errors and ambiguity. It has been written to minimize litigation, provide clear legal standards for affected conduct rather than general standards, and promote simplification and burden reduction.

*Executive Order 13352, Facilitation of Cooperative Conservation*

Under Executive Order 13352, the BLM has determined that this proposed rule would not impede the facilitation of cooperative conservation and would take appropriate account of and consider the interests of persons with ownership or other legally recognized interests in land or other natural resources. This rulemaking process will involve Federal, State, local and tribal governments, private for-profit and nonprofit institutions, other nongovernmental entities and individuals in the decision-making via

the public comment process for the proposed rule. The process would provide that the programs, projects, and activities are consistent with protecting public health and safety.

*Paperwork Reduction Act*

I. Overview

The Paperwork Reduction Act (PRA) (44 U.S.C. 3501–3521) provides that an agency may not conduct or sponsor, and a person is not required to respond to, a “collection of information,” unless it displays a currently valid control number. Collections of information include requests and requirements that an individual, partnership, or corporation obtain information, and report it to a Federal agency. 44 U.S.C. 3502(3); 5 CFR 1320.3(c) and (k).

This proposed rule contains information collection requirements that are subject to review by OMB under the PRA. Collections of information include any request or requirement that persons obtain, maintain, retain, or report information to an agency, or disclose information to a third party or to the public (44 U.S.C. 3502(3) and 5 CFR 1320.3(c)). In accordance with the PRA, the BLM is inviting public comment on proposed new information collection requirements for which the BLM is requesting a new OMB control number.

Some of the proposed requirements would add new uses and burdens for BLM Form 3160–5, Sundry Notices and Reports on Wells. Form 3160–5 has been approved by OMB for uses enumerated at 43 CFR 3162.3–2, and is one of 17 information collection activities that are included in control number 1004–0137, Onshore Oil and Gas Operations (43 CFR part 3160) (expiration date January 31, 2018). After promulgating a final rule and receiving approval (in the form of a new control number) from the OMB, the BLM intends to ask OMB to combine the activities associated with the new control number with existing Control Number 1004–0137.

The information collection activities in this proposed rule are described below along with estimates of the annual burdens. Included in the burden estimates are the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing each component of the proposed information collection requirements.

The information collection request for this proposed rule has been submitted to OMB for review under 44 U.S.C. 3507(d). A copy of the request can be obtained from the BLM by electronic

mail request to Jennifer Spencer at [j35spenc@blm.gov](mailto:j35spenc@blm.gov) or by telephone request to 202-912-7146. You may also review the information collection request online at <http://www.reginfo.gov/public/do/PRAMain>.

The BLM requests comments on the following subjects:

1. Whether the collection of information is necessary for the proper functioning of the BLM, including whether the information will have practical utility;
2. The accuracy of the BLM's estimate of the burden of collecting the information, including the validity of the methodology and assumptions used;
3. The quality, utility, and clarity of the information to be collected; and
4. How to minimize the information collection burden on those who are to respond, including the use of appropriate automated, electronic, mechanical, or other forms of information technology.

If you want to comment on the information collection requirements of this proposed rule, please send your comments directly to OMB, with a copy to the BLM, as directed in the **ADDRESSES** section of this preamble. Please identify your comments with "OMB Control Number 1004-XXXX." OMB is required to make a decision concerning the collection of information contained in this proposed rule between 30 to 60 days after publication of this document in the **Federal Register**. Therefore, a comment to OMB is best assured of having its full effect if OMB receives it by August 12, 2015.

## II. Summary of Proposed Information Collection Requirements

**Title:** Oil and Gas Facility Site Security.

**Forms:** Form 3160-5, Sundry Notices and Reports on Wells.

**OMB Control Number:** None. This is a new collection of information.

**Description of Respondents:** Holders of Federal and Indian (except Osage Tribe) oil and gas leases, operators, purchasers, transporters, and any other person directly involved in producing, transporting, purchasing, or selling, including measuring, oil or gas through the point of royalty measurement or the point of first sale.

**Respondents' Obligation:** Required to obtain or retain a benefit.

**Frequency of Collection:** On occasion.

**Abstract:** This proposed rule would establish minimum security standards for Federal and Indian (except Osage Tribe) oil and gas leases.

**Estimated Total Annual Burden Hours:** The proposed rule would result in 147,181 estimated responses and

849,452 estimated hours of burden annually. Of these totals, 127,876 responses and 782,902 hours would be for new uses of Sundry Notices.

## III. New Uses of Sundry Notices (Form 3160-5)

### A. Variance Requests

This proposed rule includes a new § 3170.6, which would authorize any party subject to the regulations in 43 CFR part 3170 to request a variance from any of the regulations in part 3170. Those would include the proposed new subpart 3173 set forth above. While proposed § 3170.6 states that a request for a variance should be filed using the BLM's electronic system, it also allows the use of Sundry Notices. Thus, § 3170.6 represents a new use of Form 3160-5, Sundry Notices and Reports on Wells.

### B. Information Collection Activities Listed in Proposed § 3173.10

Proposed § 3173.10 would list additional information collection requirements that would be new uses of Sundry Notices. These requirements would apply to all parties involved in Federal and Indian (except Osage Tribe) oil and gas production. As discussed below, other proposed regulations provide detail on these requirements.

#### 1. Submission of Site Facility Diagrams for Existing Facilities

Proposed § 3173.11(d) would apply to facilities in service before the effective date of the final rule. Operators of each such facility would be required to submit a new site facility diagram that complies with paragraphs (a) through (c) of § 3173.11 within 30 days after the BLM assigns an FMP number. The requirements of paragraphs (a) through (c) are described in detail below.

Proposed § 3173.11(e) would apply to facilities that are in service before the effective date of the final rule, and for which the BLM will not assign an FMP (e.g., facilities that dispose of produced water). Operators of each such facility would be required to submit a new site facility diagram within 60 days after the effective date of the final rule.

#### 2. Site Facility Diagrams for New or Modified Facilities

Proposed § 3173.11(c)(2) would require a site facility diagram for all new facilities and for modification of a facility. Each site facility diagram would be required to:

- Be submitted electronically to the BLM with a completed Sundry Notice for each lease, unit PA, or CA through the BLM's Well Information System

(WIS) or other system identified by the BLM;

- Be submitted within 30 days of completion of construction of a new facility, when existing facilities are modified, or when a non-Federal facility located on a Federal lease or federally approved unit or CA is constructed or modified;

- Reflect the position of the production and water recovery equipment, piping for oil, gas, and water, and metering or other measuring systems in relation to each other, but need not be to scale;

- Commencing with the header, identify all of the equipment, including, but not limited to, the header, wellhead, piping, tanks, and metering systems located on the site, and include the appropriate valves and any other equipment used in the handling, conditioning, or disposal of production and water, and indicate the direction of flow;

- Identify by API number the wells flowing into headers;

- Indicate which valve(s) must be sealed and in what position during the production and sales phases and during the conduct of other production activities (e.g., circulating tanks or drawing off water), which may be shown by an attachment, if necessary;

- Clearly identify the lease, unit PA, or CA to which the diagram applies and the land description of the facility, and the name of the company submitting the diagram, with co-located facilities being identified for each lease, unit PA, or CA; and

- Clearly identify on the diagram, or an attachment, all meters and measurement equipment. Specifically identify all approved and assigned FMPs.

If another operator operates a co-located facility, the site facility diagram would be required to depict the co-located facilities or list them as an attachment and identify them by company name, facility name(s), lease, unit PA, or communitization agreement number, and FMP number(s).

When describing co-located facilities operated by one operator, the site facility diagram would be required to include a skeleton diagram of the co-located facility, showing equipment only. For storage facilities common to co-located facilities operated by one operator, one diagram would be sufficient.

If the operator claims royalty-free use, the site facility diagram would be required to clearly identify on the diagram or as an attachment, the equipment for which the operator claims royalty-free use.

### 3. Application for Approval of an FMP for Existing Measurement Facilities

Section 3173.12 of the proposed rule would require operators to obtain an FMP number for all measurement points where the measurement affects the calculation of the volume or quality of production on which royalty is owed, and thus establish a standardized process for BLM approval of the point at which oil or gas must be measured for the purpose of determining royalty. The deadline for submitting a request for an FMP number for facilities in service on or before the effective date of the final rule would depend on the production level of the lease, unit PA, CA, or CAA.

For stand-alone leases, unit PAs, CAs, and CAAs that produce 6,000 Mcf or more of gas per month, or 40 barrels or more of oil per month, the operator would have to apply for approval of the FMP(s) within 9 months after the effective date of the final rule. For stand-alone leases, unit PAs, CAs, or CAAs that produce 3,000 Mcf or more but less than 6,000 Mcf of gas per month, or 20 barrels or more but less than 40 barrels of oil per month, the operator would have to apply for approval of the FMP(s) within 18 months after the effective date of the final rule. For stand-alone leases, unit PAs, CAs, or CAAs that produce less than 3,000 Mcf of gas per month and less than 20 barrels of oil per month, the operator would have to apply for approval of the FMP(s) within 27 months after the effective date of the final rule. These thresholds would be calculated as an average over the 12 months preceding the effective date of the final rule or the period the lease, unit, CA, or CAA has been in production, whichever is shorter.

Proposed § 3173.12(f) would require all applications for approval of an FMP to include the following:

- A complete Sundry Notice;
- The applicable Measurement Type Code specified in the BLM's Well Information System (WIS) or any successor electronic system;
- For gas and oil, a list of the measurement component names and the manufacturer, model, and serial number of each component;
- For gas, the gas sampling method (*i.e.*, spot, composite, or on-line gas chromatograph); and
- Where production from more than one well will flow to the requested FMP, a list of the API well numbers associated with the FMP.

### 4. Request for Approval of an FMP for a New Measurement Facility

Proposed § 3173.12(d) would require operators to obtain approval of an FMP

for new measurement facilities (*i.e.*, measurement facilities coming into service after the effective date of the final rule) before any production leaves the facility.

### 5. Modifications to an FMP

Proposed § 3173.13(d)(1) would require operators with an approved FMP to submit a Sundry Notice that details any modifications to the FMP within 20 business days after the change. These details would include, but would not be limited to, the old and new meter manufacturer, serial number(s), owner's name, tank number(s), and wells or facilities using the FMP. The Sundry Notice would be required to specify what was changed, why the change was made, the effective date, and include, if appropriate, an amended site facility diagram.

### 6. Request for Approval of a CAA

Proposed § 3173.15 would require the following information:

- A completed Sundry Notice seeking approval of commingling and allocation, and of off-lease measurement, if any of the proposed FMPs are outside the boundaries of any of the leases, units, or CAs whose production would be commingled;
- A proposed allocation agreement and a proposed allocation schedule (including allocation of produced water) signed by each operator of each of the leases, unit PAs, or CAs whose production would be included in the CAA;
- A list of all Federal or Indian lease, unit PA, or communitization agreement numbers in the proposed CAA, specifying the type of production (*i.e.*, oil, gas, or both) for which commingling is requested;
- A map or maps showing the boundaries of all the leases, units, unit PAs, or CAs whose production is proposed to be commingled; the proposed location by land description for the FMP used to measure the commingled production; and a map or diagram of existing or planned facilities that shows the location of all wellheads, production facilities, flow lines (including water flow lines), and FMPs existing or proposed to be installed to the extent known or anticipated;
- Documentation demonstrating that each of the leases, unit PAs, or CAs proposed for inclusion in the CAA is producing in paying quantities (or, in the case of Federal leases, is capable of production in paying quantities) pending approval of the CAA; and
- All gas analyses, including Btu content (if the CAA request includes gas) and all oil gravities (if the CAA

request includes oil) for previous periods of production from the leases, units, unit PAs, or CAs proposed for inclusion in the CAA, up to 6 years before the date of the application for approval of the CAA.

For existing facilities, site facility diagrams clearly showing any proposed change to current site facility diagrams would be required. For all new proposed facilities (including water handling facilities), the application for approval of a CAA would be required to include a schematic or engineering drawing showing the relative location of pipes, tanks, meters, separators, dehydrators, compressors, and other equipment.

If new surface disturbance is proposed on one or more of the leases, units, or CAs and the surface is managed by the BLM, the application would be required to include a request for approval of the proposed surface disturbance.

If new surface disturbance is proposed on BLM-managed land outside any of the leases, units, or CAs whose production would be commingled, the application would be required to include a right-of-way grant application, under 43 CFR part 2880 if the FMP is on a pipeline, or under 43 CFR part 2800, if the FMP is a storage tank. Applications for rights-of-way are authorized under control number 0596-0082.

If new surface disturbance is proposed on Federal land managed by an agency other than the BLM, the application would be required to include written approval from the appropriate surface-management agency.

### 7. Response to Notice of Insufficient CAA

Proposed § 3173.16 would provide that upon receipt of a request for an FMP number for a facility associated with a CAA existing on the effective date of the final rule, the BLM would review the existing CAA for consistency with proposed § 3173.14. The BLM would then notify the operator of any inconsistencies or deficiencies. The operator would be obligated to correct the flaws, or provide additional information, within 20 business days of receiving the notice.

### 8. Request to Modify a CAA

Proposed § 3173.18 would provide that a CAA may be modified at the request of all the operators who are parties to the CAA. The following information would be required in a request to modify a CAA:

- A completed Sundry Notice describing the modification requested;
- A new allocation schedule, if appropriate; and
- Certification by each operator that it agrees to the CAA modification.

#### 9. Request for Approval of Off-Lease Measurement

Proposed § 3173.23(a) through (j) would require the following information in an application for approval of off-lease measurement:

- A completed Sundry Notice;
- Justification for off-lease measurement;
- A topographic map of appropriate scale showing the following: The boundary of the lease(s), unit(s), or CA(s) from which the production originates; the location by land description of all wells, pipelines, facilities, and FMPs associated with the proposal, with equipment identified as existing or proposed; and the surface ownership of all land on which equipment is, or is proposed to be, located;
- A schematic or engineering drawing for all new proposed facilities showing the relative location of pipes, tanks, meters, separators, dehydrators, compressors, and other equipment; and
- A statement that indicates whether the proposal includes all, or only a portion of, the production from the lease, unit, or CA and if the proposal includes only a portion of the production, the application would be required to identify the FMP(s) where the remainder of the production from the lease, unit, or CA is measured or is proposed to be measured.

For existing facilities, the application would be required to include site facility diagrams clearly showing any proposed change to current site facility diagrams.

If any of the proposed off-lease measurement facilities are located on non-federally owned surface, the application would be required to include a written concurrence signed by the owner(s) of the surface and the owner(s) of the measurement facilities, including each owner(s)' name, address, and telephone number, granting the BLM unrestricted access to the off-lease measurement facility and the surface on which it is located, for the purpose of inspecting any production, measurement, water handling, or transportation equipment located on the non-Federal surface up to and including the FMP, and for otherwise verifying production accountability.

If the proposed off-lease FMP consists of a storage tank or is on a pipeline, a right-of-way grant application would be

required. Applications for rights-of-way are authorized under control number 0596–0082.

If the operator proposes to use production from the lease, unit or CA as fuel at the off-lease measurement facility without payment of royalty, the application would be required to include an application for approval of off-lease royalty-free use under applicable rules.

#### 10. Response to Notice of Insufficient Off-Lease Measurement Approval

Proposed § 3173.25 provides that upon receipt of an operator's request for assignment of an FMP number to a facility associated with an off-lease measurement approval existing on the effect date of the final rule, the BLM would review the existing approval for consistency with the requirements listed at proposed § 3173.22. The BLM would notify the operator of any inconsistencies or deficiencies. The operator would be obligated to correct any of the identified flaws within 20 business days of receiving the notice.

#### 11. Request to Amend Approval of Off-Lease Measurement

Proposed § 3173.23(k) provides that to apply for an amendment of an existing approval of off-lease measurement, the operator must submit the information listed at paragraphs (a) through (j) of proposed § 3173.23 to the extent the previously submitted information has changed.

#### IV. Other Proposed Information Collection Activities

##### A. Required Records Submission

Proposed § 3170.7(h) would apply to lessees, operators, purchasers, transporters, and any other person directly involved in producing, transporting, purchasing, selling, or measuring oil or gas through the point of royalty measurement of the point of first sale, whichever is later. Those parties would be required to submit all records that are relevant to determining the quality, quantity, disposition, and verification of production attributable to Federal or Indian leases upon request, in accordance with a regulation, written order, Onshore Order, NTL, or COA.

##### B. Water-Draining Records

Proposed § 3173.6 would require submission of information when water is drained from a production storage tank. The operator, purchaser, or transporter, as appropriate, would have to submit the following information:

- Federal or Indian lease, unit PA, or CA number(s);

- FMP number associated with the tank;
- The tank location by land description;
- The unique tank number and nominal capacity;
- Date and time for opening gauge;
- Opening gauge and color cut measurements;
- Name of the person and company draining the tank;
- Unique identifying number of each seal removed;
- Time of the closing gauge;
- Closing gauge measurement; and
- Unique identifying number of each seal installed.

##### C. Hot Oiling, Clean-up, and Completion Records

Proposed § 3173.7 would require the submission of information during hot oil, clean-up, or completion operations, or any other situation where the operator removes oil from storage, temporarily uses it for operational purposes, and then returns it to storage on the same lease, unit PA, or CA. The operator would have to submit the following information:

- Federal or Indian lease, unit PA, or communitization agreement number(s);
- FMP number associated with the tank or group of tanks;
- The tank location by land description;
- The unique tank number and nominal capacity;
- Date and time of the opening gauge;
- Opening gauge measurement;
- Name of the person and company removing production from the tank;
- Unique identifying number of each seal removed;
- Time of the closing gauge;
- Closing gauge measurement;
- Unique identifying number of each seal installed;
- How the oil was used; and
- Where the oil was used (*i.e.*, well or facility name and number).

##### D. Report of Theft or Mishandling of Production

Proposed 3173.8 would require operators, purchasers, or transporters to submit a report no later than the next business day after discovery of an incident of apparent theft or mishandling of production. A written incident report would have to follow an oral report within 10 business days of the oral report. The incident report would include the following information:

- Company name and name of the person reporting the incident;
- Lease, unit PA, or communitization agreement number, well or facility name

and number, and FMP number, as appropriate;

- Land description of the facility location where the incident occurred;
- The estimated volume of production removed;
- The manner in which access was obtained to the production or how the mishandling occurred;
- The name of the person who discovered the incident; and
- The date and time of the discovery of the incident.

#### E. Required Recordkeeping for Inventory and Seal Records

Proposed § 3173.9 would require operators to measure and record at the end of each calendar month an inventory consisting of total observed volume in storage.

For each seal, the operator would be required to maintain a record that includes the unique identifying number of each seal and the valve or meter component on which the seal is or was

used; the date of installation or removal of each seal; for valves, the position (open or closed) in which it was sealed; and the reason the seal was removed.

#### V. Burden Estimates

The following table details the proposed information collection activities that would be new uses of Form 3160–5, Sundry Notices and Reports on Wells.

**BILLING CODE 4310–84–C**

<b>A. Type of Response</b>	<b>B. Number of Responses</b>	<b>C. Hours per Response</b>	<b>D. Total Hours (Column B x Column C)</b>
Variance Requests (43 CFR 3170.6)	100	8	800
Submission of Site Facility Diagrams for Existing Facilities (43 CFR 3173.11(d) and (e))	42,000	8	336,000
Site Facility Diagrams for New or Modified Facilities (43 CFR 3173.11(c)(2))	5,000	8	40,000
Application for Approval of an FMP for Existing Measurement Facilities (43 CFR 3173.12)	73,500	4	294,000
Request for Approval of an FMP for a New Measurement Facility (43 CFR 3173.12(d))	2,000	4	8,000
Modifications to an FMP (43 CFR 3173.13(d)(1))	2,000	4	8,000
Request for Approval of a CAA (43 CFR 3173.15)	1,000	40	40,000
Response to Notice of Insufficient CAA (43 CFR 3173.16)	118	40	4,720
Request to Modify a CAA (43 CFR 3173.18)	1,000	40	40,000
Request for Approval of Off-Lease Measurement (43 CFR 3173.23(a) through (j))	1,100	10	11,000
Response to Notice of Insufficient Off-Lease Measurement Approval (43 CFR 3173.25)	33	4	132
Request to Amend Approval of Off- Lease Measurement (43 CFR 3173.23(k))	25	10	250
<b>Totals</b>	<b>127,876</b>	<b>—</b>	<b>782,902</b>

The following table details the rest of the proposed information collection activities.

<b>A. Type of Response</b>	<b>B. Number of Responses</b>	<b>C. Hours Per Response</b>	<b>D. Total Hours</b>
Records Submission Requirements (43 CFR 3170.7 (h))	4,300	5	21,500
Water-Draining Records (43 CFR 3173.6)	5,000	2	10,000
Hot Oiling, Clean-Up, and Completion Records (43 CFR 3173.7)	5,000	2	10,000
Report of Theft or Mishandling of Production (43 CFR 3173.8)	5	10	50
Required Recordkeeping for Inventory and Seal Records (43 CFR 3173.9)	5,000	5	25,000
<b>Totals</b>	<b>19,305</b>		<b>66,550</b>

The proposed rule would remove <sup>7</sup> 43 CFR 3162.7–5, which would result in

the removal of three information collection activities from control

number 1004–0137, as shown in the following table:

<b>A. Type of Response</b>	<b>B. Number of Responses Authorized Annually</b>	<b>C. Hours Per Response Authorized Annually</b>	<b>D. Total Hours (Column B x Column C)</b>
Schematic / Facility Diagrams (43 CFR 3162.4-1(a) and 3162.7-5(d)(1)) <sup>7</sup>	1,000	8	8,000
Records for Seals (43 CFR 3162.7-5(b))	90,000	0.75	67,500
Site Security (43 CFR 3162.7-5(c))	2,500	8	20,000
<b>Totals</b>	<b>93,500</b>		<b>95,500</b>

<sup>7</sup> Section 3162.4–1 is merely descriptive. Section 3162.7–5 is prescriptive.

**BILLING CODE 4310-84-P**

The proposed rule would result in the following program changes to 1004-0137 due to the removal of 43 CFR 3162.75, and due to the addition of new requirements.

1. The total estimated burdens would be 147,181 responses and 849,452 hours. Of those totals, 127,876 responses and 782,902 hours would be due to new uses of Sundry Notices.

2. The proposed rule would remove 43 CFR 3162.7-5, which would result in the removal of three information collection activities from control number 1004-0137 that represent a total of 93,500 estimated responses and 95,500 burden hours.

3. The net estimated burdens for the proposed rule would be 53,681 responses and 753,952 hours.

*National Environmental Policy Act*

The BLM has prepared a draft environmental assessment (EA) that concludes that the proposed rule would not constitute a major Federal action significantly affecting the quality of the human environment under § 102(2)(C) of the National Environmental Policy Act (NEPA), 42 U.S.C. 4332(2)(C). Under the draft EA, a detailed statement under NEPA is therefore not required. A copy of the draft EA can be viewed at [www.regulations.gov](http://www.regulations.gov) (use the search term 1004-AE15, open the Docket Folder, and look under Supporting Documents) and at the address specified in the **ADDRESSES** section.

The proposed rule would not affect the environment significantly because, for the most part, the revisions to the requirements of Order 3 proposed here would involve changes that are of an administrative, technical, or procedural nature that would apply to the BLM's and the lessee's and/or operator's management processes. For example, operators would now be required to maintain records generated for Federal leases for at least 7 years, consistent with statutory requirements. Similarly, the proposed rule would require more detailed information on site facility diagrams such as information about the manufacturer, model, and serial number of equipment, and information regarding royalty free use. The submission of this additional information would not result in any on-the-ground effects. However, compliance with some of these requirements may result in additional surface disturbing activities (e.g., additional surface disturbance might be required if an operator with an existing off lease measurement authorization had to move those measurement facilities back on lease because they did not

comply with the requirements of this proposed rule.) Such surface disturbing activities would be conducted in accordance with existing surface operating standards and guidelines for oil and gas exploration and development and include appropriate Best Management Practices (BMP). The BLM will consider any new information we receive during the public comment period for the proposed rule that may inform our analysis of the potential environmental impacts of the proposed rule.

*Executive Order 13211, Actions Concerning Regulations That Significantly Affect Energy Supply, Distribution, or Use*

This proposed rule would not have a substantial direct effect on the nation's energy supply, distribution or use, including a shortfall in supply or price increase. Changes in this proposed rule would strengthen the BLM's accountability requirements for operators under Federal and Indian oil and gas leases. As discussed above, these changes would increase recordkeeping requirements, place additional restrictions on CAAs and on off-lease measurement, and provide for significant new immediate assessments for violations of the regulations. All of these changes are administrative in nature and would have a one-time transition cost of an average of about \$32,800 per regulated entity and an ongoing annual average cost of about \$3,600 per entity per year. Entities with the greatest activity (e.g., numerous FMPs) would incur higher costs.

The BLM expects that the proposed rule would not result in a net change in the quantity of oil and gas that is produced from oil and gas leases on Federal and Indian lands.

*Information Quality Act*

In developing this proposed rule, the BLM did not conduct or use a study, experiment, or survey requiring peer review under the Information Quality Act (Pub. L. 106-554, Appendix C Title IV, § 515, 114 Stat. 2763A-153).

*Clarity of the Regulations*

Executive Order 12866 requires each agency to write regulations that are simple and easy to understand. The BLM invites your comments on how to make these proposed regulations easier to understand, including answers to questions such as the following:

1. Are the requirements in the proposed regulations clearly stated?
2. Do the proposed regulations contain technical language or jargon that interferes with their clarity?

3. Does the format of the proposed regulations (grouping and order of sections, use of headings, paragraphing, etc.) aid or reduce their clarity?

4. Would the regulations be easier to understand if they were divided into more (but shorter) sections?

5. Is the description of the proposed regulations in the **SUPPLEMENTARY INFORMATION** section of this preamble helpful in understanding the proposed regulations? How could this description be more helpful in making the proposed regulations easier to understand?

Please send any comments you have on the clarity of the regulations to the address s specified in the **ADDRESSES** section.

**Authors**

The principal author of this proposed rule is Michael Wade, Senior Oil and Gas Compliance Specialist, BLM, Washington Office. Contributing authors include:

Steve McCracken, Petroleum Engineering Technician, BLM, Great Falls Field Office; Darla McMillan, Petroleum Engineering Technician, BLM, Moore Field Office; Leslie Peterson, Petroleum Engineer, BLM, Royal Gorge Field Office; Loren Wickstorn, Petroleum Engineering Technician, BLM, Dolores Field Office; Cris Carey, ONRR, Denver Office; Luke Lundmark, ONRR, Denver Office; and Vicky Stafford, ONRR, Denver Office. The team was assisted by Rich Estabrook, Petroleum Engineer Washington Office; Faith Bremner, Division of Regulatory Affairs, BLM, Washington Office; and Geoffrey Heath, Office of the Solicitor, DOI, Washington Office.

**List of Subjects***43 CFR part 3160*

Administrative practice and procedure; Government contracts; Indians-lands; Mineral royalties; Oil and gas exploration; Penalties; Public lands—mineral resources; Reporting and recordkeeping requirements.

*43 CFR part 3170*

Government contracts; Indians-lands; Mineral royalties; Oil and gas exploration; Penalties; Public lands—mineral resources; Reporting and recordkeeping requirements.

Dated: July 1, 2015. —

**Janice M. Schneider,**  
Assistant Secretary,

Land and Minerals Management.

**43 CFR Chapter II**

For the reasons set out in the preamble, the Bureau of Land Management proposes to amend 43 CFR chapter II as follows:

## PART 3160—ONSHORE OIL AND GAS OPERATIONS

■ 1. Revise the authority citation for part 3160 to read as follows:

**AUTHORITY:** 25 U.S.C. 396, 396d and 2107; 30 U.S.C. 189, 306, 359, and 1751; and 43 U.S.C. 1732(b), 1733 and 1740.

■ 2. Amend § 3160.0–3 by removing the words “the Federal Oil and Gas Royalty Management Act of 1982 (30 U.S.C. 1701)” and adding in their place the words “the Federal Oil and Gas Royalty Management Act of 1982, as amended by the Federal Oil and Gas Royalty Simplification Act of 1996 (30 U.S.C. 1701 *et seq.*)”.

■ 3. Revise § 3161.1 to read as follows:

### § 3161.1 Jurisdiction.

The regulations in this part apply to:

(a) All Federal and Indian onshore oil and gas leases (other than those of the Osage Tribe);

(b) All onshore facility measurement points where Federal or Indian oil or gas is measured;

(c) Indian Mineral Development Act agreements for oil and gas, unless specifically excluded in the agreement;

(d) Leases and other business agreements for the development of tribal energy resources under a Tribal Energy Resource Agreement entered into with the Secretary, unless specifically excluded in the lease, other business agreement, or Tribal Energy Resource Agreement; and

(e) State or private tracts committed to a federally approved unit or communitization agreement as defined by or established under 43 CFR subpart 3105 or 43 CFR part 3180.

■ 4. Amend § 3162.3–2 by adding paragraph (d) to read as follows:

### § 3162.3–2 Subsequent well operations.

\* \* \* \* \*

(d) For details on how to apply for approval of a facility measurement point; approval for surface or subsurface commingling from different leases, unit participating areas and communitized areas; or approval for off-lease measurement, see 43 CFR 3173.12, 3173.15, and 3173.23, respectively.

■ 5. Amend § 3162.4–1 by revising paragraphs (a) and (d) and adding paragraph (e) to read as follows:

### § 3162.4–1 Well records and reports.

(a) The operator must keep accurate and complete records with respect to:

(1) All lease operations, including, but not limited to, drilling, producing, redrilling, repairing, plugging back, and abandonment operations;

(2) Production facilities and equipment (including schematic

diagrams as required by applicable orders and notices); and

(3) Determining and verifying the quantity, quality, and disposition of production from or allocable to Federal or Indian leases (including source records).

\* \* \* \* \*

(d) All records and reports required by this section must be maintained for the following time periods:

(1)(i) For Federal leases and units or communitized areas that include Federal leases, but do not include Indian leases, 7 years after the records are generated.

(ii) If a judicial proceeding or demand involving such records is timely commenced, the record holder must maintain such records until the final nonappealable decision in such judicial proceeding is made, or with respect to that demand is rendered, unless the Secretary or the applicable delegated State authorizes in writing an earlier release of the requirement to maintain such records.

(2)(i) For Indian leases, and units or communitized areas that include Indian leases, but do not include Federal leases, 6 years after the records are generated.

(ii) If the Secretary or his/her designee notifies the record holder that the Department has initiated or is participating in an audit or investigation involving such records, the record holder must maintain such records until the Secretary or his designee releases the record holder from the obligation to maintain the records.

(3)(i) For units and communitized areas that include both Federal and Indian leases, if the Secretary or his/her designee has notified the record holder within 6 years after the records are generated that an audit or investigation involving such records has been initiated, but a judicial proceeding or demand is not commenced within 7 years after the records are generated, the record holder must retain all records regarding production from the unit or communitized area until the Secretary or his/her designee releases the record holder from the obligation to maintain the records.

(ii) If a judicial proceeding or demand is commenced within 7 years after the records are generated, the record holder must retain all records regarding production from the unit or communitized area until the final nonappealable decision in such judicial proceeding is made, or with respect to that demand is rendered, or until the Secretary or his designee releases the record holder from the obligation to

maintain the records, whichever is later, unless the Secretary or his designee authorizes in writing a release of the requirement to maintain such records before a final nonappealable decision is made or rendered.

(e) Record holders include lessees, operators, purchasers, transporters, and any other person directly involved in producing, transporting, purchasing, or selling, including measuring, oil or gas through the point of royalty measurement or the point of first sale, whichever is later. Record holders must maintain records generated during or for the period for which the lessee or operator has an interest in or conducted operations on the lease, or in which a person is involved in transporting, purchasing, or selling production from the lease, for the period of time required in paragraph (d) of this section.

### § 3162.4–3 [Removed]

■ 6. Remove § 3162.4–3.

■ 7. Amend § 3162.6 as follows:

■ a. In paragraph (a), revise the word “indentification” to read “identification”; and

■ b. Revise paragraphs (b) and (c), redesignate paragraph (d) as paragraph (e), and add a new paragraph (d).

The revisions and addition read as follows:

### § 3162.6 Well and facility identification.

\* \* \* \* \*

(b) For wells located on Federal and Indian lands, the operator must properly identify, by a sign in a conspicuous place, each well, other than those permanently abandoned. The well sign must include the well number, the name of the operator, the lease serial number, and the surveyed location (the quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer, such as metes and bounds or longitude and latitude). When specifically requested by the authorized officer, the sign must include the unit or communitization agreement name or number. The authorized officer may also require the sign to include the name of the Indian allottee lessor(s) preceding the lease serial number.

(c) All facilities at which oil or gas produced from a Federal or Indian lease is stored, measured, or processed must be clearly identified with a sign that contains the name of the operator, the lease serial number or communitization or unit agreement identification number, as appropriate, and the surveyed location (the quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer,



such as metes and bounds or longitude and latitude). On Indian leases, the sign also must include the name of the appropriate tribe and whether the lease is tribal or allotted. For situations of 1 tank battery servicing 1 well in the same location, the requirements of this paragraph and paragraph (b) of this section may be met by 1 sign as long as it includes the information required by both paragraphs. In addition, each storage tank must be clearly identified by a unique number. With regard to the quarter-quarter designation and the unique tank number, any such designation established by state law or regulation satisfies this requirement.

(d) All signs must be maintained in legible condition and must be clearly apparent to any person at or approaching the storage, measurement, or transportation point.

\* \* \* \* \*

#### **§ 3162.7–1 [Amended]**

■ 8. Amend § 3162.7–1 by removing paragraph (f).

#### **§ 3162.7–5 [Removed]**

■ 9. Remove § 3162.7–5.

■ 10. Amend § 3163.2 by revising paragraphs (a), (b), and (k), to read as follows:

#### **§ 3163.2 Civil penalties.**

(a)(1) Whenever an operating rights owner or operator, as appropriate, fails or refuses to comply with any applicable requirements of the Federal Oil and Gas Royalty Management Act, any mineral leasing law, any regulation thereunder, or the terms of any lease or permit issued thereunder, the authorized officer will notify the operating rights owner or operator, as appropriate, in writing of the violation, unless the violation was discovered and reported to the authorized officer by the liable person or the notice was previously issued under § 3163.1 of this subpart.

(2) Whenever a purchaser or transporter who is not an operating rights owner or operator fails or refuses to comply with 30 U.S.C. 1713 or applicable rules or regulations regarding records relevant to determining the quality, quantity, and disposition of oil or gas produced from or allocable to a Federal or Indian oil and gas lease, the authorized officer will notify the purchaser or transporter, as appropriate, in writing of the violation.

(b)(1) If the violation is not corrected within 20 days of such notice or report, or such longer time as the authorized officer may agree to in writing, the operating rights owner, operator, purchaser, or transporter, as

appropriate, will be liable for a civil penalty of up to \$500 per violation for each day such violation continues, dating from the date of such notice or report. Any amount imposed and paid as assessments under § 3163.1(a)(1) will be deducted from penalties under this section.

(2) If the violation specified in paragraph (a) of this section is not corrected within 40 days of such notice or report, or a longer period as the authorized officer may agree to in writing, the operating rights owner, operator, purchaser, or transporter, as appropriate, will be liable for a civil penalty of up to \$5,000 per violation for each day the violation continues, not to exceed a maximum of 60 days, dating from the date of such notice or report. Any amount imposed and paid as assessments under § 3163.1(a)(1) of this subpart will be deducted from penalties under this section.

\* \* \* \* \*

(k) If the violation continues beyond the 20-day maximum specified in paragraph (d) of this section, the authorized officer will revoke the transporter's authority to remove crude oil from any Federal or Indian lease under the authority of that authorized officer or to remove any crude oil allocated to such lease site. This revocation of the transporter's authority will continue until compliance is achieved and any related penalty paid.

#### **§ 3164.1 [Amended]**

■ 11. Amend § 3164.1, in paragraph (b), by removing the third entry in the chart (the reference to Order No. 3, Site Security).

■ 12. Amend § 3165.3 by revising paragraphs (a) and (d) to read as follows:

#### **§ 3165.3 Notice, State Director review and hearing on the record.**

(a) *Notice.* (1) Whenever an operating rights owner or operator, as appropriate, fails to comply with any provisions of the lease, the regulations in this part, applicable orders or notices, or any other appropriate order of the authorized officer, the authorized officer will issue a written notice or order to the appropriate party and the lessee(s) to remedy any defaults or violations.

(2) Whenever any purchaser or transporter, who is not an operating rights owner or operator, fails or refuses to comply with 30 U.S.C. 1713 or applicable rules or regulations regarding records relevant to determining the quality, quantity, and disposition of oil or gas produced from or allocable to a Federal or Indian oil and gas lease, applicable orders or notices, or any other appropriate orders of the

authorized officer, the authorized officer will give written notice or order to the purchaser or transporter to remedy any violations.

(3) Written orders or a notice of violation, assessment, or proposed penalty will be issued and served by personal service by the authorized officer, or by certified mail, return receipt requested. Service will be deemed to occur when the document is received or 7 business days after the date it is mailed, whichever is earlier.

(4) Any person may designate a representative to receive any notice of violation, order, assessment, or proposed penalty on that person's behalf.

(5) In the case of a major violation, the authorized officer will make a good faith effort to contact such designated representative by telephone, to be followed by a written notice or order. Receipt of a notice or order will be deemed to occur at the time of such verbal communication, and the time of notice and the name of the receiving party will be documented in the file. If the good faith effort to contact the designated representative is unsuccessful, notice of the major violation or order may be given to any person conducting or supervising operations subject to the regulations in this part.

(6) In the case of a minor violation, the authorized officer will only provide a written notice or order to the designated representative.

(7) A copy of all orders, notices, or instructions served on any contractor or field employee or designated representative will also be mailed to the operator. Any notice involving a civil penalty against an operator will be mailed to the operator, with a copy to the operating rights owner.

\* \* \* \* \*

(d) *Action on request for State Director review.* The State Director will issue a final decision within 10 business days after the receipt of a complete request for administrative review or, where oral presentation has been made, within 10 business days after the oral presentation. The State Director's decision represents the final Bureau decision from which further review may be obtained as provided in paragraph (c) of this section for proposed penalties, and in § 3165.4 for all other decisions.

■ 13. Add part 3170 to read as follows:

### **PART 3170—ONSHORE OIL AND GAS PRODUCTION**

#### **Subpart 3170—Onshore Oil and Gas Production: General**

Sec.

- 3170.1 Authority.
- 3170.2 Scope.
- 3170.3 Definitions and acronyms.
- 3170.4 Prohibitions against by-pass and tampering.
- 3170.5 [Reserved].
- 3170.6 Variances.
- 3170.7 Required recordkeeping, records retention, and records submission.
- 3170.8 Appeal procedures.
- 3170.9 Enforcement.

#### Subpart 3171—[Reserved]

#### Subpart 3172—[Reserved]

#### Subpart 3173—Requirements for Site Security and Production Handling

- 3173.1 Definitions and acronyms.
- 3173.2 Storage and sales facilities—seals.
- 3173.3 Oil measurement system components—seals.
- 3173.4 Federal seals.
- 3173.5 Removing production from tanks for sale and transportation by truck.
- 3173.6 Water-draining operations.
- 3173.7 Hot oiling, clean-up, and completion operations.
- 3173.8 Report of theft or mishandling of production.
- 3173.9 Required recordkeeping for inventory and seal records.
- 3173.10 Form 3160–5, Sundry Notices and Reports on Wells.
- 3173.11 Site facility diagram.
- 3173.12 Applying for a facility measurement point.
- 3173.13 Requirements for approved facility measurement points.
- 3173.14 Conditions for commingling and allocation approval (surface and downhole).
- 3173.15 Applying for a commingling and allocation approval.
- 3173.16 Existing commingling and allocation approvals.
- 3173.17 Relationship of a commingling and allocation approval to royalty-free use of production.
- 3173.18 Modification of a commingling and allocation approval.
- 3173.19 Effective date of a commingling and allocation approval.
- 3173.20 Terminating a commingling and allocation approval.
- 3173.21 Combining production downhole in certain circumstances.
- 3173.22 Requirements for off-lease measurement.
- 3173.23 Applying for off-lease measurement.
- 3173.24 Effective date of an off-lease measurement approval.
- 3173.25 Existing off-lease measurement approval.
- 3173.26 Relationship of off-lease measurement approval to royalty-free use of production.
- 3173.27 Termination of off-lease measurement approval.
- 3173.28 Instances not constituting off-lease measurement, for which no approval is required.
- 3173.29 Immediate assessments.

#### Appendix to Subpart 3173

#### § 3170.1 Authority.

The authorities for promulgating the regulations in this part are the Mineral Leasing Act, 30 U.S.C. 181 *et seq.*; the Mineral Leasing Act for Acquired Lands, 30 U.S.C. 351 *et seq.*; the Indian Mineral Leasing Act, 25 U.S.C. 396a *et seq.*; the Act of March 3, 1909, 25 U.S.C. 396; and the Indian Mineral Development Act, 25 U.S.C. 2101 *et seq.* Each of these statutes gives the Secretary the authority to promulgate necessary and appropriate rules and regulations. See 30 U.S.C. 189; 30 U.S.C. 359; 25 U.S.C. 396d; 25 U.S.C. 396; and 25 U.S.C. 2107. The Secretary has delegated this authority to the Bureau of Land Management (BLM). For Indian leases, the delegation of authority to the BLM appears at 25 CFR parts 211, 212, 213, 225, and 227. In addition, various provisions of the Federal Oil and Gas Royalty Management Act, as amended, 30 U.S.C. 1701 *et seq.*, provide additional authority regarding records, inspection, and enforcement for onshore oil and gas operations, in addition to granting rulemaking authority at 30 U.S.C. 1751.

#### § 3170.2 Scope.

The regulations in this part apply to:

- (a) All Federal onshore and Indian oil and gas leases (other than those of the Osage Tribe);
- (b) Indian Mineral Development Act (IMDA) agreements for oil and gas, unless specifically excluded in the agreement or unless the relevant provisions of the rule are inconsistent with the agreement;
- (c) Leases and other business agreements for the development of tribal energy resources under a Tribal Energy Resource Agreement entered into with the Secretary, unless specifically excluded in the lease, other business agreement, or Tribal Energy Resource Agreement;
- (d) State or private tracts committed to a federally approved unit or communitization agreement as defined by or established under 43 CFR subpart 3105 or 43 CFR part 3180; and
- (e) All onshore facility measurement points where oil or gas produced from the leases or agreements identified earlier in this section is measured.

(d) State or private tracts committed to a federally approved unit or communitization agreement as defined by or established under 43 CFR subpart 3105 or 43 CFR part 3180; and

#### § 3170.3 Definitions and acronyms.

(a) As used in this part, the term:

*Allocation* means a method or process by which production is measured at a central point and apportioned to the individual lease, unit or unit Participating Area (PA), or Communitized Area (CA) from which the production originated.

*API MPMS (followed by a number)* means the American Petroleum Institute Manual of Petroleum Measurement Standards, with the number referring to the Chapter and Section in that manual.

*Audit trail* means all source records necessary to verify and recalculate the volume and quality of oil and gas production measured at facility measurement points (FMPs) and reported to the Office of Natural Resources Revenue (ONRR).

*Authorized officer* (AO) has the same meaning as defined in 43 CFR 3000.0–5.

*By-pass* means any piping or other arrangement around or avoiding a meter or other measuring device or method (or component thereof) at an FMP that allows oil or gas to flow without measurement. Equipment that permits the changing of the orifice plate of a gas meter without bleeding the pressure off the gas meter run (e.g., senior fitting) is not considered to be a by-pass.

*Commingling*, for production accounting and reporting purposes, means combining production from multiple leases, unit PAs, or CAs, or combining production from one or more leases, unit PAs, or CAs with production from State, local governmental, or private properties before the point of royalty measurement. Combining production from multiple wells on a single lease, unit PA, or CA before measurement is not considered commingling for production accounting purposes. Combining production downhole from different geologic formations on the same lease, unit PA, or CA is not considered commingling for production accounting purposes.

*Communitized area* (CA) means the area committed to a BLM approved communitization agreement.

*Communitization agreement* means an agreement to combine a lease or a portion of a lease that cannot otherwise be independently developed and operated in conformity with an established well spacing or well development program, with other tracts for purposes of cooperative development and operations.

*Condition of Approval* (COA) means a site-specific requirement included in the approval of an application that may limit or modify the specific actions covered by the application. Conditions of approval may minimize, mitigate, or prevent impacts to public lands or resources.

*Days* means consecutive calendar days, unless otherwise indicated.

*Facility* means:

(i) A site and associated equipment used to process, treat, store, or measure production from or allocated to a

Federal or Indian lease, unit, or CA that is located upstream of or at (and including) the approved point of royalty measurement; and

(ii) A site and associated equipment used to store, measure, or dispose of produced water that is located on a lease, unit, or CA.

**Facility measurement point (FMP)** means a BLM-approved point where oil or gas produced from a Federal or Indian lease, unit, or CA is measured and the measurement affects the calculation of the volume or quality of production on which royalty is owed. It includes, but is not limited to, the approved point of royalty measurement and measurement points relevant to determining the allocation of production to Federal or Indian leases, unit PAs, or CAs. However, allocation facilities that are part of a commingling and allocation approval under § 3173.15 or that are part of a commingling and allocation approval approved after July 9, 2013, are not FMPs. An FMP also includes a meter or measurement facility used in the determination of the volume or quality of royalty-bearing oil or gas produced before BLM approval of an FMP under § 3173.12 of this part. An FMP must be located on the lease, unit, or CA unless the BLM approves measurement off the lease, unit, or CA. The BLM will not approve a gas processing plant tailgate meter located off the lease, unit, or CA, as an FMP.

**Gas** means any fluid, either combustible or noncombustible, hydrocarbon or non-hydrocarbon, that has neither independent shape nor volume, but tends to expand indefinitely and exists in a gaseous state under metered temperature and pressure conditions.

**Incident of Noncompliance (INC)** means documentation that identifies violations and notifies the recipient of the notice of required corrective actions or potential assessments of civil penalties.

**Lease** has the same meaning as defined in 43 CFR 3160.0–5.

**Lessee** has the same meaning as defined in 43 CFR 3160.0–5.

**NIST traceable** means an unbroken and documented chain of comparisons relating measurements from field or laboratory instruments to a known standard maintained by the National Institute of Standards and Technology (NIST).

**Notice to lessees and operators (NTL)** has the same meaning as defined in 43 CFR 3160.0–5.

**Off-lease measurement** means measurement at an FMP that is not located on the lease, unit, or CA from which the production came.

**Oil** means a mixture of hydrocarbons that exists in the liquid phase at the temperature and pressure at which it is measured. Condensate is considered to be oil for purposes of this part. Natural gas liquids extracted from a gas stream upstream of the approved point of royalty measurement are considered to be oil for purposes of this part.

(i) **Clean Oil or Pipeline Oil** means oil that is of such quality that it is acceptable to normal purchasers.

(ii) **Slop oil** means oil that is of such quality that it is not acceptable to normal purchasers and is usually sold to oil reclaimers. Oil that can be made acceptable to normal purchasers through special treatment that can be economically provided at the existing or modified facilities or using portable equipment at or upstream of the FMP is not slop oil.

(iii) **Waste oil** means oil that has been determined by the AO to be of such quality that it cannot be treated economically and put in a marketable condition with existing or modified lease facilities or portable equipment, cannot be sold to reclaimers, and has been determined by the AO to have no economic value.

**Operator** has the same meaning as defined in 43 CFR 3160.0–5.

**Participating area (PA)** has the same meaning as defined in 43 CFR 3180.0–5.

**Point of royalty measurement** means a BLM-approved FMP at which the volume and quality of oil or gas which is subject to royalty is measured. The point of royalty measurement is to be distinguished from meters that determine only the allocation of production to particular leases, unit PAs, CAs, or non-Federal and non-Indian properties. The point of royalty measurement is also known as the point of royalty settlement.

**Production** means oil or gas removed from a well bore and any products derived therefrom.

**Production Measurement Team (PMT)** means a panel of members from the BLM (which may include BLM-contracted experts) that reviews changes in industry measurement technology and standards to determine whether regulations should be updated and provides guidance on measurement technologies not addressed in current regulation. The purpose of the PMT is to act as a central advisory body to ensure that oil and gas produced from Federal and Indian leases is accurately measured and properly reported.

**Purchaser** means any person or entity who legally takes ownership of oil or gas in exchange for financial or other consideration.

**Source record** means any unedited and original record, document, or data that is used to determine volume and quality of production, regardless of format or how it was created or stored (e.g., paper or electronic). It includes, but is not limited to, raw and unprocessed data (e.g., instantaneous and continuous information used by flow computers to calculate volumes); gas charts; measurement tickets; calibration, verification, prover, and configuration reports; pumper and gauger field logs; volume statements; event logs; seal records; and gas analyses.

**Statistically significant** means the difference between two data sets that exceeds the threshold of significance.

**Threshold of significance** means the maximum difference between two data sets (a and b) that can be attributed to uncertainty effects. The threshold of significance is determined as follows:

$$T_s = \sqrt{U_a^2 + U_b^2}$$

where:

$T_s$  = Threshold of significance, in percent  
 $U_a$  = Uncertainty (95 percent confidence) of data set a, in percent

$U_b$  = Uncertainty (95 percent confidence) of data set b, in percent

**Total observed volume (TOV)** means the total measured volume of all oil, sludges, sediment and water, and free water at the measured or observed temperature and pressure.

**Transporter** means any person or entity who legally moves or transports oil or gas from an FMP.

**Uncertainty** means the statistical range of error that can be expected between a measured value and the true value of what is being measured. Uncertainty is determined at a 95 percent confidence level for the purposes of this part.

**Unit** means the land within a unit area as defined in 43 CFR 3180.0–5.

**Unit PA** means the unit participating area, if one is in effect, the exploratory unit if there is no associated participating area, or an enhanced recovery unit.

**Variance** means an approved alternative to a provision or standard of a regulation, Onshore Oil and Gas Order, or NTL.

(b) As used in this part, the following additional acronyms apply:

**API** means American Petroleum Institute.

**BLM** means the Bureau of Land Management.

**CMS** means Coriolis Measurement System.

*OGOR* means Oil and Gas Operations Report (Form ONRR-4054 or any successor report).

*ONRR* means the Office of Natural Resources Revenue, U.S. Department of the Interior, and includes any successor agency.

*WIS* means Well Information System or any successor electronic system.

#### **§ 3170.4 Prohibitions against by-pass and tampering.**

(a) All by-passes are prohibited.

(b) Tampering with any measurement device, component of a measurement device, or measurement process is prohibited.

(c) Any by-pass or tampering with a measurement device, component of a measurement device, or measurement process may, together with any other remedies provided by law, result in an assessment of civil penalties for knowingly or willfully:

(1) Taking, removing, transporting, using, or diverting oil or gas from a lease site without valid legal authority under 30 U.S.C. 1719(d)(2) and 43 CFR. 3163.2(f)(2); or

(2) Preparing, maintaining, or submitting false, inaccurate, or misleading reports, records, or information under 30 U.S.C. 1719(d)(1) and 43 CFR 3163.2(f)(1).

#### **§ 3170.5 [Reserved]**

#### **§ 3170.6 Variances.**

(a) Any party subject to a requirement of a regulation in this part may request a variance from that requirement.

(1) A request for a variance must include the following:

(i) Identification of the specific requirement from which the variance is requested;

(ii) Identification of the length of time for which the variance is requested, if applicable;

(iii) An explanation of the need for the variance;

(iv) A detailed description of the proposed alternative;

(v) A showing that the proposed alternative will produce a result that meets or exceeds the objectives of the applicable requirement for which the variance is requested; and

(vi) The FMP number(s) for which the variance is requested, if applicable.

(2) A request for a variance must be submitted as a separate document from any plans or applications. A request for a variance that is submitted as part of a master development plan, application for permit to drill, right-of-way application, or applications for approval of other types of operations rather than submitted separately will not be considered. Approval of a plan or

application that contains a request for a variance does not constitute approval of the variance. This paragraph does not prohibit submitting a separate request for a variance simultaneously with a plan or application.

For plans or applications that are contingent upon the approval of the variance request, we encourage the simultaneous submission of the request for variance and the plan or application.

(3) The party requesting the variance must submit the request and any supporting documents to the BLM Field Office having jurisdiction over the lands described in the application. The operator should file the request using the BLM's electronic system. If electronic filing is not possible or practical, the operator may submit a request for variance on the Form 3160-5, Sundry Notices and Reports on Wells (Sundry Notice) to the BLM Field Office having jurisdiction.

(4) The AO, after considering all relevant factors, may approve the variance, or approve it with COAs, only if the AO determines that:

(i) The proposed alternative meets or exceeds the objectives of the applicable requirement(s) of the regulation;

(ii) Approving the variance will not adversely affect royalty income and production accountability; and

(iii) Issuing the variance is consistent with maximum ultimate economic recovery as defined in 43 CFR 3160.0-5.

(5) The decision whether to grant or deny the variance request is entirely within the BLM's discretion.

(6) A variance from the requirements of a regulation in this part does not constitute a variance to provisions of other regulations, including Onshore Oil and Gas Orders.

(b) The BLM reserves the right to rescind a variance or modify any COA of a variance due to changes in Federal law, technology, regulation, BLM policy, field operations, noncompliance, or other reasons. The BLM will provide a written justification if it rescinds a variance or modifies a COA.

#### **§ 3170.7 Required recordkeeping, records retention, and records submission.**

(a) Lessees, operators, purchasers, transporters, and any other person directly involved in producing, transporting, purchasing, selling, or measuring oil or gas through the point of royalty measurement or the point of first sale, whichever is later, must retain all records, including source records, that are relevant to determining the quality, quantity, disposition, and verification of production attributable to Federal or Indian leases for the periods

prescribed in paragraphs (c) through (e) of this section.

(b) This retention requirement applies to records generated during or for the period for which the lessee or operator has an interest in or conducted operations on the lease, or in which a person is involved in transporting, purchasing, or selling production from the lease.

(c)(1) For Federal leases, and units or CAs that include Federal leases but do not include Indian leases, the record holder must maintain records for 7 years after the records are generated.

(2) If a judicial proceeding or demand involving such records is timely commenced, the record holder must maintain such records until the final nonappealable decision in such judicial proceeding is made, or with respect to that demand is rendered, unless the Secretary or his designee or the applicable delegated State authorizes in writing an earlier release of the requirement to maintain such records.

(d)(1) For Indian leases, and units or CAs that include Indian leases but do not include Federal leases, the record holder must maintain records for 6 years after the records are generated.

(2) If the Secretary or his designee notifies the record holder that the Department of the Interior has initiated or is participating in an audit or investigation involving such records, the record holder must maintain such records until the Secretary or his designee releases the record holder from the obligation to maintain the records.

(e)(1) For units and CAs that include both Federal and Indian leases, if the Secretary or his designee has notified the record holder within 6 years after the records are generated that an audit or investigation involving such records has been initiated, but a judicial proceeding or demand is not

commenced within 7 years after the records are generated, the record holder must retain all records regarding production from the unit or CA until the Secretary or his designee releases the record holder from the obligation to maintain the records.

(2) If a judicial proceeding or demand is commenced within 7 years after the records are generated, the record holder must retain all records regarding production from the unit or CA until the final nonappealable decision in such judicial proceeding is made, or with respect to that demand is rendered, or until the Secretary or his designee releases the record holder from the obligation to maintain the records, whichever is later, unless the Secretary or his designee authorizes in writing a release of the requirement to maintain

such records before a final nonappealable decision is made or rendered.

(f) The lessee, operator, purchaser, and transporter must maintain an audit trail.

(g) All records, including source records that are used to determine quality, quantity, disposition and verification of production attributable to a Federal or Indian lease, unit PA, or CA, must include the FMP number and the name of the company that created the record. For existing measurement facilities, in the interim period before the assignment of an FMP number, all records must include the following information:

- (1) The name of the operator;
- (2) The lease, unit PA, or communitization agreement number; and
- (3) The well or facility name and number.

(h) Upon request of the AO, the operator, purchaser, or transporter must provide such records to the AO as may be required by regulation, written order, Onshore Order, NTL, or COA.

(i) All records must be legible.

(j) All records requiring a signature must also have the signer's printed name.

#### **§ 3170.8 Appeal procedures.**

BLM decisions, orders, assessments, or other actions under the regulations in this part are administratively appealable under the procedures prescribed in 43 CFR 3165.3(b), 3165.4, and part 4.

#### **§ 3170.9 Enforcement.**

Noncompliance with any of the requirements of this part or any order issued under this part may result in enforcement actions under 43 CFR subpart 3163 or any other remedy available under applicable law or regulation.

#### **Subpart 3171—[Reserved]**

#### **Subpart 3172—[Reserved]**

#### **Subpart 3173—Requirements for Site Security and Production Handling**

##### **§ 3173.1 Definitions and acronyms.**

(a) As used in this subpart, the term: *Access* means the ability to:

(i) Add liquids to or remove liquids from, any tank or piping system, through a valve or combination of valves or by moving liquids from one tank to another tank; or

(ii) Enter any component in a measuring system affecting the accuracy of the measurement of the quality or quantity of the liquid being measured.

*Appropriate valves* means those valves that must be sealed during the production or sales phase (e.g., fill lines, equalizer, overflow lines, sales lines, circulating lines, or drain lines).

*Authorized representative (AR)* has the same meaning as defined in 43 CFR 3160.0–5.

*Business day* means any day Monday through Friday, excluding Federal holidays.

*Effectively sealed* means the placement of a seal in such a manner that the sealed component cannot be accessed, moved, or altered without the seal being broken.

*Land description* means the geographical coordinates referenced to the National Spatial Reference System, North American Datum 1983 or latest edition, in feet and direction from the nearest two adjacent section lines, or, if not within the Rectangular Survey System, the nearest two adjacent property lines, generated from the BLM's current Geographic Coordinate database (Public Land Survey System).

*Low-volume property* means a lease, unit PA, or CA that does not produce sufficient volumes for the operator to realize from continued production a sufficient rate of return on the investment required to achieve non-commingled measurement of volumes produced from that lease, unit PA, or CA, such that a prudent operator would opt to plug a well or shut-in the lease, unit PA, or CA if the commingling request were not approved. The volumes produced from a lease, unit PA, or CA include all volumes produced and are not limited to volumes allocated to Federal leases or the Federal interest. In the absence of information demonstrating a different rate, a rate of return less than 10 percent (before Federal, State, and local taxes) will be regarded as not sufficient. A lease, unit PA, or CA may also be regarded as a low-volume property if the operator demonstrates that the cost of the capital expenditures required to achieve measurement of non-commingled production from that property is more than the net present value (NPV) of the projected royalty from continued production from the lease, CA, or unit PA over the life of the equipment.

*Maximum ultimate economic recovery* has the same meaning as defined in 43 CFR 3160.0–5.

*Mishandling* means unmeasured or unaccounted-for removal of production from a facility.

*Piping* means a tubular system (e.g., metallic, plastic, fiberglass, or rubber) used to move fluids (liquids and gases).

*Production phase* means that event during which oil is delivered directly to

or through production equipment to the storage facilities and includes all operations at the facility other than those defined by the sales phase.

*Sales phase* means that event during which oil is removed from storage facilities for sale at an FMP.

*Seal* means a uniquely numbered device which completely secures either a valve or those components of a measuring system that affect the quality or quantity of the oil being measured.

(b) As used in this subpart, the following additional acronyms apply:

*BMPs* means Best Management Practices.

*Btu* means British thermal unit.

*CAA* means commingling and allocation approval.

#### **§ 3173.2 Storage and sales facilities—seals.**

(a) All lines entering or leaving any oil storage tank must have valves capable of being effectively sealed during the production and sales phases unless otherwise provided under this subpart. During the production phase, all appropriate valves that allow unmeasured production to be removed from storage must be effectively sealed in the closed position. During any other phase (sales, water drain, hot oiling), and prior to taking the top tank gauge measurement, all appropriate valves that allow unmeasured production to enter or leave the sales tank must be effectively sealed in the closed position (see Appendix to Subpart 3173). Each unsealed or ineffectively sealed appropriate valve is a separate violation.

(b) Valves or combinations of valves and tanks that provide access to the production before it is measured for sales are considered appropriate valves and are subject to the seal requirements of this subpart (see Appendix to 3173). If there is more than one valve on a line from a tank, the valve closest to the tank must be sealed. All appropriate valves must be in an operable condition and accurately reflect whether the valve is open or closed.

(c) The following are not considered appropriate valves and are not subject to the sealing requirements of this subpart:

(1) Valves on production equipment (e.g., separator, dehydrator, gun barrel, or wash tank);

(2) Valves on water tanks, provided that the possibility of access to production in the sales and storage tanks does not exist through a common circulating, drain, overflow, or equalizer system;

(3) Valves on tanks that contain oil that has been determined by the AO or AR to be waste or slop oil;

(4) Sample cock valves used on piping or tanks with a Nominal Pipe Size of 1 inch or less in diameter;

(5) When a single tank with a nominal capacity of 500 barrels (bbl) or less is used for collecting marginal production of oil produced from a single well (*i.e.*, production that is less than 3 bbl per day), the requirement for the fill-line valve to be sealed during shipment is waived, but all other seal requirements of this subpart apply;

(6) Gas line valves used on piping with a Nominal Pipe Size of 1 inch or less used as tank bottom "roll" lines are not required to be sealed, provided there is no access to the contents of the storage tank and the roll lines cannot be used as equalizer lines;

(7) Valves on tank heating systems which use a fluid other than the contents of the storage tank (*i.e.*, steam, water, or glycol);

(8) Valves used on piping with a Nominal Pipe Size of 1 inch or less connected directly to the pump body or used on pump bleed off lines;

(9) Tank vent-line valves; and

(10) Sales, equalizer, or fill-line valves on systems where production may be removed only through approved oil metering systems (*e.g.*, lease automatic custody transfer and CMS). However, any valve which allows access for removing oil before it is measured through the metering system must be effectively sealed (see Appendix to 3173).

(d) Tampering with any appropriate valve is prohibited. Tampering with an appropriate valve may result in an assessment of civil penalties for knowingly or willfully preparing, maintaining, or submitting false, inaccurate, or misleading reports, records, or written information under 30 U.S.C. 1719(d)(1) and 43 CFR 3163.2(f)(1), or knowingly or willfully taking, removing, transporting, using, or diverting oil or gas from a lease site without valid legal authority under 30 U.S.C. 1719(d)(2) and 43 CFR 3163.2(f)(2), together with any other remedies provided by law.

### **§ 3173.3 Oil measurement system components—seals.**

(a) Components used for quantity or quality determination of oil must be effectively sealed to indicate tampering, including, but not limited to, the following components (see §§ 3174.8(a) (lease automatic custody transfer meters) and 3174.9(d) (Coriolis measurement systems) of this part):

(1) Sample probe;

(2) Sampler volume control;

(3) All valves on lines entering or leaving the sample container, excluding

the safety pop-off valve (if so equipped). Each valve must be sealed in the open or closed position, as appropriate;

(4) Meter assembly, including the counter head and meter head;

(5) Temperature averager/flow computer;

(6) Back pressure valve downstream of the meter;

(7) Any drain valves in the system;

(8) Manual sampling valves (if so equipped);

(9) Valves on diverter lines larger than 1" in nominal diameter;

(10) Right-angle drive;

(11) Totalizer; and

(12) Prover connections.

(b) Each missing or ineffectively sealed component is a separate violation.

### **§ 3173.4 Federal seals.**

(a) In addition to any INC issued for a seal violation, the AO or AR may place one or more Federal seals on any appropriate valve, sealing device, or oil metering system component that does not comply with the requirements in §§ 3173.2 and 3173.3 of this subpart if the operator is not present, refuses to cooperate with the AO or AR, or is unable to correct the noncompliance.

(b) The placement of a Federal seal does not constitute compliance with the requirements of §§ 3173.2 and 3173.3 of this subpart.

(c) A Federal seal may not be removed without the approval of the AO or AR.

### **§ 3173.5 Removing production from tanks for sale and transportation by truck.**

(a) When a single truck load constitutes a completed sale, the driver must possess documentation containing the information required in § 3174.12 of this part.

(b) When multiple truckloads are involved in a sale and the oil measurement method is based on the difference between the opening and closing gauges, the driver of the last truck must possess the documentation containing the information required in § 3174.12 of this part. All other drivers involved in the sale must possess a trip log or manifest.

(c) After the seals have been broken, the purchaser or transporter is responsible for the entire contents of the tank until it is resealed.

### **§ 3173.6 Water-draining operations.**

When water is drained from a production storage tank, the operator, purchaser, or transporter, as appropriate, must document the following information:

(a) Federal or Indian lease, unit PA, or CA number(s);

(b) FMP number associated with the tank;

(c) The tank location by land description;

(d) The unique tank number and nominal capacity;

(e) Date and time for opening gauge;

(f) Opening gauge and color cut measurements;

(g) Name of the person and company draining the tank;

(h) Unique identifying number of each seal removed;

(i) Time of the closing gauge;

(j) Closing gauge measurement; and

(k) Unique identifying number of each seal installed.

### **§ 3173.7 Hot oiling, clean-up, and completion operations.**

(a) During hot oil, clean-up, or completion operations, or any other situation where the operator removes oil from storage, temporarily uses it for operational purposes, and then returns it to storage on the same lease, unit PA, or CA, the operator must document the following information:

(1) Federal or Indian lease, unit PA, or communitization agreement number(s);

(2) FMP number associated with the tank or group of tanks;

(3) The tank location by land description;

(4) The unique tank number and nominal capacity;

(5) Date and time of the opening gauge;

(6) Opening gauge measurement;

(7) Name of the person and company removing production from the tank;

(8) Unique identifying number of each seal removed;

(9) Time of the closing gauge;

(10) Closing gauge measurement;

(11) Unique identifying number of each seal installed;

(12) How the oil was used; and

(13) Where the oil was used (*i.e.*, well or facility name and number).

(b) During hot oiling, line flushing, or completion operations or any other situation where the operator removes production from storage for use on a different lease, unit PA, or CA, the production is considered sold and must be measured in accordance with the applicable requirements of this subpart and reported as sold to ONRR on the OGOR (30 CFR part 1210 subpart C).

### **§ 3173.8 Report of theft or mishandling of production.**

(a) No later than the next business day after discovery of an incident of apparent theft or mishandling of production, the operator, purchaser, or transporter must report the incident to

the AO. All oral reports must be followed up with a written incident report within 10 business days of the oral report.

(b) The incident report must include the following information:

- (1) Company name and name of the person reporting the incident;
- (2) Lease, unit PA, or communitization agreement number, well or facility name and number, and FMP number, as appropriate;
- (3) Land description of the facility location where the incident occurred;
- (4) The estimated volume of production removed;
- (5) The manner in which access was obtained to the production or how the mishandling occurred;
- (6) The name of the person who discovered the incident; and
- (7) The date and time of the discovery of the incident.

#### **§ 3173.9 Required recordkeeping for inventory and seal records.**

(a) At the end of each calendar month, the operator must measure and record an inventory consisting of TOV in storage;

(b) For each seal, the operator must maintain a record that includes:

- (1) The unique identifying number of each seal and the valve or meter component on which the seal is or was used;
- (2) The date of installation or removal of each seal;
- (3) For valves, the position (open or closed) in which it was sealed; and
- (4) The reason the seal was removed.

#### **§ 3173.10 Form 3160–5, Sundry Notices and Reports on Wells.**

(a) The operator must submit a Form 3160–5, Sundry Notices and Reports on Wells (Sundry Notice) for the following:

- (1) Site facility diagrams (see § 3173.11 of this subpart);
- (2) Request for an FMP number (see § 3173.12 of this subpart);
- (3) Request for FMP amendments (see § 3173.13 of this subpart);
- (4) Requests for approval of off-lease measurement (see § 3173.23 of this subpart);
- (5) Request to amend an approval of off-lease measurement (see § 3173.23(k) of this subpart);
- (6) Requests for approval of proposed CAAs (see § 3173.15 of this subpart); and
- (7) Request to modify a CAA (see § 3173.18 of this subpart).

(b) The operator must submit all Sundry Notices electronically to the BLM office having jurisdiction over the lease, unit, or CA using the BLM's WIS, or other electronic system the BLM designates, unless the submitter:

(1) Is a small business, as defined by the U.S. Small Business Administration; and

(2) Does not have access to the Internet.

#### **§ 3173.11 Site facility diagram.**

(a) A site facility diagram is required for all facilities.

(b) Except for the requirement to submit a Form 3160–5 with the site facility diagram, no format is prescribed for site facility diagrams. The diagram should be formatted to fit on an 8½ × 11 sheet of paper, if possible, and must be legible and comprehensible to an individual with an ordinary working knowledge of oil field operations (See Appendix to 3173). If more than one page is required, each page must be numbered (in the format “N of X pages”).

(c) The diagram must:

(1) Be submitted within 30 days of completion of construction of a new facility, when existing facilities are modified, or when a non-Federal facility located on a Federal lease or federally approved unit or CA is constructed or modified;

(2) Reflect the position of the production and water recovery equipment, piping for oil, gas, and water, and metering or other measuring systems in relation to each other, but need not be to scale;

(3) Commencing with the header, identify all of the equipment, including, but not limited to, the header, wellhead, piping, tanks, and metering systems located on the site, and include the appropriate valves and any other equipment used in the handling, conditioning, or disposal of production and water, and indicate the direction of flow;

(4) Identify by API number the wells flowing into headers;

(5) If another operator operates a co-located facility, depict the co-located facilities on the diagram or list them as an attachment and identify them by company name, facility name(s), lease, unit PA, or communitization agreement number, and FMP number(s);

(6) Indicate which valve(s) must be sealed and in what position during the production and sales phases and during the conduct of other production activities (e.g., circulating tanks or drawing off water), which may be shown by an attachment, if necessary;

(7) When describing co-located facilities operated by one operator, include a skeleton diagram of the co-located facility, showing equipment only. For storage facilities common to co-located facilities operated by one operator, one diagram is sufficient;

(8) Clearly identify the lease, unit PA, or CA to which the diagram applies and the land description of the facility, and the name of the company submitting the diagram, with co-located facilities being identified for each lease, unit PA, or CA;

(9) Clearly identify on the diagram, or an attachment, all meters and measurement equipment. Specifically identify all approved and assigned FMPs.

(10) If the operator claims royalty-free use, clearly identify on the diagram or as an attachment, the equipment for which the operator claims royalty-free use. The operator must either:

(i) For each engine, motor, or major component (e.g., compressor, separator, dehydrator, heater-treater, or tank heater) powered by production from the lease, unit, or CA, state the volume (oil or gas) consumed per day and per month, how the volume is determined, the equipment manufacturer's name, rated use, and equipment serial number; or

(ii) Measure the volume used by meter or tank gauge.

(11) Each diagram must contain a signature block certifying “I (print company representative's name) representing (print company name) certify the accuracy and completeness of the information contained within this site facility diagram. (signature of company representative) on (date signed) (printed name of company representative).” The person certifying must have the authority to act on behalf of the operator or lessee and possess knowledge of the accuracy and completeness of the information presented in the diagram.

(d) For a facility in service before [EFFECTIVE DATE OF THE FINAL RULE], the operator must submit a new site facility diagram that complies with this section within 30 days after the BLM assigns an FMP number under § 3173.12 of this subpart; and

(e) For facilities in service before [EFFECTIVE DATE OF THE FINAL RULE], for which the BLM will not assign an FMP number under § 3173.12 of this subpart (e.g., facilities that dispose of produced water), the operator must submit a new site facility diagram by [DATE 60 DAYS AFTER THE EFFECTIVE DATE OF THE FINAL RULE].

#### **§ 3173.12 Applying for a facility measurement point.**

(a)(1) Unless otherwise approved, the FMP(s) for all Federal and Indian leases, unit PAs, or CAs must be located within the boundaries of the lease, unit, or CA from which the production originated



and must measure only production from that lease, unit PA, or CA.

(2) Off-lease measurement, commingling, or allocation of Federal or Indian production requires prior approval (see 43 CFR 3162.7–2, 3162.7–3, 3173.15, 3173.16, 3173.23, and 3173.24).

(b) The BLM will not approve a gas processing plant tailgate meter located off the lease, unit, or CA as an FMP.

(c) The operator must separately apply for approval of separate FMP numbers for an FMP that measures oil produced from a lease, unit PA, CA, or CAA and an FMP that measures gas produced from the same lease, unit PA, CA, or CAA, even if the measurement equipment or facilities are at the same location.

(d) For a measurement facility that comes into service after [EFFECTIVE DATE OF THE FINAL RULE], the operator must obtain BLM approval for the FMP before any production leaves the facility.

(e) For a measurement facility in service on or before [EFFECTIVE DATE OF THE FINAL RULE], the operator must apply for BLM approval of an FMP within the time prescribed in this paragraph, based on the production level of the lease, unit PA, CA, or CAA that the facility serves. The required time to apply for approval of an FMP applies to both oil and gas measurement facilities measuring production from that lease, unit PA, CA, or CAA.

(1) For a stand-alone lease, unit PA, CA, or CAA that produces 6,000 Mcf or more of gas per month or 40 barrels or more of oil per month, by [DATE 9 MONTHS AFTER THE EFFECTIVE DATE OF THE FINAL RULE].

(2) For a stand-alone lease, unit PA, CA, or CAA that produces 3,000 Mcf or more but less than 6,000 Mcf of gas per month or 20 barrels or more but less than 40 barrels of oil per month, by [DATE 18 MONTHS AFTER THE EFFECTIVE DATE OF THE FINAL RULE].

(3) For a stand-alone lease, unit PA, CA, or CAA that produces less than 3,000 Mcf of gas per month and less than 20 barrels of oil per month, [DATE 27 MONTHS AFTER THE EFFECTIVE DATE OF THE FINAL RULE].

(4) Calculate the production levels prescribed in paragraphs (e)(1) through (3) of this section as an average over the 12 months preceding the effective date of this section or the period the lease, unit PA, CA, or CAA has been in production, whichever is shorter.

(5) If the operator applies for an FMP approval by the date required under this paragraph, the operator may continue to

use the existing measurement points until the BLM acts on the application.

(6) If the operator fails to apply for an FMP approval by the date required under this paragraph, the operator will be subject to an incident of noncompliance and assessment of civil penalty under 43 CFR subpart 3163, together with any other remedy available under applicable law or regulation.

(f) All requests for FMP approval must include the following:

(1) A complete Sundry Notice for approval of the FMP;

(2) The applicable Measurement Type Code specified in WIS;

(3) For gas and oil, a list of the measurement component names and the manufacturer, model, and serial number of each component. For example:

(i) “Gas measurement,” electronic flow computer—manufacturer, model, serial number; primary element (holder, e.g., senior fitting)—manufacturer, serial number, size; transducer (static, differential and temperature)—manufacturer, model, serial number, upper range limit; temperature chart recorder—model, serial number, etc.;

(ii) “Oil measurement by tank gauge,” oil tank—tank number and/or serial number (there may be more than one tank associated with an FMP); and

(iii) “Oil measurement by LACT,” totalizer—model, serial number, temperature averager—model, serial number, etc.

(iv) “Oil measurement by CMS,” Coriolis meter—manufacturer, model, size serial number; transducer (pressure and temperature)—manufacturer, model, upper range limit; tertiary device, manufacturer, model.

(4) For gas, the gas sampling method (i.e., spot, composite, or on-line gas chromatograph);

(5) Where production from more than one well will flow to the requested FMP, list the API well numbers associated with the FMP.

(g) FMP approval may be requested concurrently with requests for off-lease measurement or commingling and allocation approval.

(h) If the FMP request is approved, the BLM will assign an FMP number.

#### **§ 3173.13 Requirements for approved facility measurement points.**

(a) Within 30 days after BLM approval, the operator must stamp or stencil the FMP number on a fixed plate:

(1) For gas, either on the meter run or meter house, and, as required in 43 CFR 3175.101(b)(4)(i), on the flow computer display; and

(2) For oil measured by:

(i) LACT, on the non-resettable totalizer;

(ii) CMS, on the Coriolis meter and on the display of the tertiary device; or

(iii) Tank, on the pipeline, tank, or valve closest to the tank where the connection for removal or delivery is made.

(b) The operator must maintain the stamped or stenciled FMP number in a legible condition. The FMP number must be clearly visible to any person at or approaching the FMP and clearly identified with each FMP;

(c) Beginning on the first day of the month after the FMP number is assigned, the operator must use the FMP number in recordkeeping, as required by this subpart;

(d)(1) The operator must file a Sundry Notice that details any modifications to the FMP within 20 business days after the change.

(2) These details include, but are not limited to, the old and new meter manufacturer, serial number(s), owner's name, tank number(s), and wells or facilities using the FMP.

(3) The Sundry Notice must specify what was changed, why the change was made, the effective date, and include, if appropriate, an amended site facility diagram (see § 3173.11 of this subpart).

#### **§ 3173.14 Conditions for commingling and allocation approval (surface and downhole).**

(a) With the exceptions stated in paragraph (b) of this section, the BLM will grant a CAA only if:

(1) The proposed commingling includes production from only:

(i) Federal leases, unit PAs, or CAs with 100 percent Federal mineral ownership and the same fixed royalty rate and revenue distribution; or

(ii) Indian tribal leases, unit PAs, or CAs wholly owned by the same tribe and with the same fixed royalty rate;

(2) There is a signed agreement prescribing an allocation method among the properties whose production is to be commingled (including a method for allocating produced water);

(3) For each of the leases, unit PAs, or CAs proposed for inclusion in the CAA, the applicant demonstrates to the AO that a lease, unit PA, or CA proposed for inclusion is producing in paying quantities (or, in the case of Federal leases, capable of production in paying quantities) pending approval of the CAA; and

(4) The FMP(s) for the proposed CAA measure production originating only from the leases, unit PAs, or CAs in the CAA.

(b) The BLM will consider proposed commingling of production from Federal or Indian leases, unit PAs, or



CAs with less than 100 percent Federal or same Indian tribal ownership, or proposed commingling of production from one or more Federal or Indian leases, unit PAs, or CAs with production from State or private properties, only if the proposed commingling meets the conditions of subparagraphs (a)(2) through (4) of this section and if:

(1) The Federal or Indian lease, unit PA, or CA meets the definition of a low-volume property; or

(2) There are overriding considerations which indicate that the BLM should approve a commingling application notwithstanding potential negative royalty impacts from commingled measurement. Such considerations could include topographic or other environmental considerations that make non-commingled measurement physically impractical or undesirable, in view of where additional measurement and related equipment necessary to achieve non-commingled measurement would have to be located; and

(3) In either case, the AO determines that the requested CAA is in the public interest, taking into account relevant environmental considerations and the BLM's ability to verify and account for the production proposed to be commingled.

#### **§ 3173.15 Applying for a commingling and allocation approval.**

To apply for a CAA, the operator(s) must submit the following information, if applicable, to the BLM office having jurisdiction over the leases, unit PAs, or CAs whose production is proposed to be commingled:

(a) A completed Sundry Notice for approval of:

(1) Commingling and allocation; and  
(2) Off-lease measurement under § 3173.23 of this subpart, if any of the proposed FMPs are outside the boundaries of any of the leases, units, or CAs whose production would be commingled (which may be included in the same Sundry Notice as the request for approval of commingling and allocation);

(b) A proposed allocation agreement and a proposed allocation schedule (including allocation of produced water) signed by each operator of each of the leases, unit PAs, or CAs whose production would be included in the CAA;

(c) A list of all Federal or Indian lease, unit PA, or communitization agreement numbers in the proposed CAA, specifying the type of production (*i.e.*, oil, gas, or both) for which commingling is requested;

(d) A map or maps showing the following:

(1) The boundaries of all the leases, units, unit PAs, or CAs whose production is proposed to be commingled;

(2) The proposed location by land description for the FMP used to measure the commingled production; and

(3) A map or diagram of existing or planned facilities that shows the location of all wellheads, production facilities, flow lines (including water flow lines), and FMPs existing or proposed to be installed to the extent known or anticipated;

(e) For existing facilities, site facility diagrams clearly showing any proposed change to current site facility diagrams (see § 3173.11 of this subpart);

(f) A schematic or engineering drawing for all new proposed facilities (including water handling facilities) showing the relative location of pipes, tanks, meters, separators, dehydrators, compressors, and other equipment;

(g) If new surface disturbance is proposed on one or more of the leases, units, or CAs and the surface is BLM-managed land, a request to the AO for approval of the proposed surface disturbance (by Sundry Notice if the affected land is leased, or in an application for right-of-way if the affected land is unleased land within a CA or unit);

(h) If new surface disturbance is proposed on BLM-managed land outside any of the leases, units, or CAs whose production would be commingled, a right-of-way grant application, under 43 CFR part 2880 if the FMP is on a pipeline, or under 43 CFR part 2800, if the FMP is a storage tank;

(i) If new surface disturbance is proposed on Federal land managed by an agency other than the BLM, written approval from the appropriate surface-management agency;

(j) Documentation demonstrating that each of the leases, unit PAs, or CAs proposed for inclusion in the CAA is producing in paying quantities (or, in the case of Federal leases, is capable of production in paying quantities) pending approval of the CAA; and

(k) All gas analyses, including Btu content (if the CAA request includes gas) and all oil gravities (if the CAA request includes oil) for previous periods of production from the leases, units, unit PAs, or CAs proposed for inclusion in the CAA, up to 6 years before the date of the application for approval of the CAA.

#### **§ 3173.16 Existing commingling and allocation approvals.**

(a) Upon receipt of an operator's request for assignment of an FMP number to a facility associated with a CAA existing on the effective date of this subpart, the AO will review the existing CAA for consistency with the minimum standards and requirements for a CAA under § 3173.14 of this subpart. The AO will notify the operator in writing of any inconsistencies or deficiencies.

(b) The operator must correct any inconsistencies or deficiencies that the AO identifies, or provide additional information, within 20 business days of receipt of the AO's notice.

(c) The AO may impose new or amended COAs on an existing commingling approval to make the approval consistent with the requirements for a CAA under § 3173.14 of this subpart in connection with approving the requested FMP. If the operator appeals one of more of the new COAs, the existing FMP approval will continue in effect during the pendency of the appeal.

(d) If the existing commingling approval does not meet the standards and requirements of § 3173.14 of this subpart and the operator does not correct the deficiencies, the AO may terminate the existing commingling approval under § 3173.20 of this subpart and deny the request for an FMP number for the facility associated with the existing commingling approval.

(e) If the BLM approves a new CAA to replace an existing CAA, the new CAA is effective on the first day of the month following its approval.

#### **§ 3173.17 Relationship of a commingling and allocation approval to royalty-free use of production.**

A CAA does not constitute approval of off-lease royalty-free use of production as fuel in facilities located at an FMP approved under the CAA. The operator may seek such approval under applicable rules.

#### **§ 3173.18 Modification of a commingling and allocation approval.**

(a) At the request of all the operators who are a party to a CAA, the CAA may be modified when:

(1) There is a change in the allocation schedule (including allocation of produced water) resulting from a change in relative production from wells subject to the CAA or addition or elimination of a well from the CAA;

(2) Additional leases, unit PAs, or CAs are proposed for inclusion in the CAA;

(3) A lease, unit PA, or communitization agreement within the

CAA terminates, or a unit PA within the CAA ceases production; or

(4) There is a change in operator.

(b) To request a modification of a CAA, all operators must submit to the AO:

(1) A completed Sundry Notice describing the modification requested;

(2) A new allocation schedule, if appropriate; and

(3) Certification by each operator that it agrees to the CAA modification.

**§ 3173.19 Effective date of a commingling and allocation approval.**

(a) If the BLM approves a commingling application, the effective date is the first day of the month following first production through the FMP(s) for the CAA.

(b) If the BLM approves a modification, the effective date is the first day of the month following approval of the modification.

(c) A CAA does not modify any of the terms of the leases, units, or communitization agreements covered by the CAA.

**§ 3173.20 Terminating a commingling and allocation approval.**

(a) Any operator who is party to a CAA may unilaterally terminate the CAA by submitting a Sundry Notice to the BLM. The Sundry Notice must identify the new FMP(s) for the lease(s), unit PA(s), or CA(s) operated by that operator.

(b) The BLM may terminate the CAA for any reason, including, but not limited to, the following:

(1) Changes in technology, regulation, or BLM policy;

(2) Non-compliance with the terms or COAs of the CAA or this subpart; or

(3) The BLM determines that a lease, unit, or communitization agreement subject to the CAA has terminated, or a unit PA subject to the CAA has ceased production.

(c) If only one lease, unit PA, or CA remains subject to the CAA, the CAA terminates automatically.

(d) The BLM will notify in writing all operators who are a party to the CAA of the CAA termination, the reason for the termination, and the effective date of the termination.

(e) If a CAA is terminated, each lease, unit PA, or CA that was included in the CAA will revert to separate measurement. The separate measurement must be on the lease, unit, or CA unless off-lease measurement is approved.

**§ 3173.21 Combining production downhole in certain circumstances.**

(a)(1) Combining production from a single well (*e.g.*, a directional well)

drilled into different hydrocarbon pools or geologic formations underlying separate adjacent properties (whether Federal, Indian, State, or private), where none of the hydrocarbon pools or geologic formations underlie or are common to more than one of the respective properties, constitutes commingling for purposes of §§ 3173.14 through 3173.20.

(2) If any of the hydrocarbon pools or geologic formations underlie or are common to more than one of the properties, the operator must establish a unit PA (see 43 CFR part 3180) or communitization agreement (see 43 CFR 3105.2–1–3105.2–3), as applicable, rather than applying for a CAA.

(b) Combining production downhole from different geologic formations on the same lease from a single well requires approval of the AO (see 43 CFR 3162.3–2), but it is not considered commingling for production accounting purposes, unless the respective geologic formations have different ownership.

**§ 3173.22 Requirements for off-lease measurement.**

Off-lease measurement must:

(a) Involve only production from a single lease, unit PA, or CA or from a single CAA;

(b) Provide for accurate production accountability;

(c) Be in the public interest (considering factors including, but not limited to, BMPs and maximum ultimate economic recovery); and

(d) Occur at an approved FMP. A request for approval of an FMP (see § 3173.13 of this subpart) may be filed concurrently with the request for off-lease measurement.

**§ 3173.23 Applying for off-lease measurement.**

To apply for approval of off-lease measurement, the operator must submit the following to the BLM office having jurisdiction over the leases, units, or CAs:

(a) A completed Sundry Notice. The Sundry Notice should include a request for a CAA if the proposed off-lease measurement is associated with a proposed CAA (see § 3173.15 of this subpart);

(b) Justification for off-lease measurement (*e.g.*, necessary for economic or physical accessibility reasons, or BMPs);

(c) A topographic map of appropriate scale showing the following:

(1) The boundary of the lease(s), unit(s), or CA(s) from which the production originates;

(2) The location by land description of all wells, pipelines, facilities, and FMPs

associated with the proposal, with equipment identified as existing or proposed; and

(3) The surface ownership of all land on which equipment is, or is proposed to be, located.

(d) A schematic or engineering drawing for all new proposed facilities showing the relative location of pipes, tanks, meters, separators, dehydrators, compressors, and other equipment;

(e) For existing facilities, site facility diagrams clearly showing any proposed change to current site facility diagrams (see § 3173.11 of this subpart);

(f) If any of the proposed off-lease measurement facilities are located on non-federally owned surface, a written concurrence signed by the owner(s) of the surface and the owner(s) of the measurement facilities, including each owner(s)' name, address, and telephone number, granting the BLM unrestricted access to the off-lease measurement facility and the surface on which it is located, for the purpose of inspecting any production, measurement, water handling, or transportation equipment located on the non-Federal surface up to and including the FMP, and for otherwise verifying production accountability. If the ownership of the non-Federal surface or of the measurement facility changes, the operator must obtain and provide to the AO the written concurrence required under this paragraph from the new owner(s);

(g) A right-of-way grant application, filed under 43 CFR part 2880 if the proposed off-lease FMP is on a pipeline, or under 43 CFR part 2800 if the proposed off-lease FMP is a storage tank;

(h) A right-of-way grant application, filed under 25 CFR part 169, if any of the proposed surface facilities are on Indian land outside the lease, unit, or CA from which the production originated;

(i) An application for approval of off-lease royalty-free use under applicable rules, if the operator proposes to use production from the lease, unit, or CA as fuel at the off-lease measurement facility without payment of royalty; and

(j) A statement that indicates whether the proposal includes all, or only a portion of, the production from the lease, unit, or CA. (For example, gas, but not oil, could be proposed for off-lease measurement.) If the proposal includes only a portion of the production, identify the FMP(s) where the remainder of the production from the lease, unit, or CA is measured or is proposed to be measured.

(k) To apply for an amendment of an existing approval of off-lease

measurement, the operator must submit a completed Sundry Notice required under paragraph (a) of this section, and information required under paragraphs (b) through (j) of this section to the extent the information previously submitted has changed.

**§ 3173.24 Effective date of an off-lease measurement approval.**

If the BLM approves off-lease measurement, the approval is effective on the date that the approval is issued, unless the approval specifies a different effective date.

**§ 3173.25 Existing off-lease measurement approval.**

(a) Upon receipt of an operator's request for assignment of an FMP number to a facility associated with an off-lease measurement approval existing on [EFFECTIVE DATE OF THE FINAL RULE], the AO will review the existing off-lease measurement approval for consistency with the minimum standards and requirements for an off-lease measurement approval under § 3173.22 of this subpart. The AO will notify the operator in writing of any inconsistencies or deficiencies.

(b) The operator must correct any inconsistencies or deficiencies that the AO identifies, or provide additional information, within 20 business days of receipt of the AO's notice.

(c) The AO may impose new or amended COAs on an existing off-lease measurement approval to make the approval consistent with the requirements for off-lease measurement under § 3173.22 of this subpart in connection with approving the requested FMP. If the operator appeals one of more of the new COAs, the existing FMP approval will continue in effect during the pendency of the appeal.

(d) If the existing off-lease measurement approval does not meet the standards and requirements of

§ 3173.22 of this subpart and the operator does not correct the deficiencies, the AO may terminate the existing off-lease measurement approval under § 3173.27 of this subpart and deny the request for an FMP number for the facility associated with the existing off-lease measurement approval.

(e) If the BLM approves a new off-lease measurement arrangement to replace an existing off-lease measurement approval, the new arrangement is effective on the first day of the month following its approval.

**§ 3173.26 Relationship of off-lease measurement approval to royalty-free use of production.**

Approval of off-lease measurement does not constitute approval of off-lease royalty-free use of production as fuel in facilities located at an FMP approved under the off-lease measurement approval. The operator may seek such approval under applicable rules.

**§ 3173.27 Termination of off-lease measurement approval.**

(a) The operator may terminate the off-lease measurement by submitting a Sundry Notice to the BLM. The Sundry Notice must identify the new FMP(s) for the lease(s), unit(s), or CA(s) previously subject to the off-lease measurement approval.

(b) The BLM may terminate off-lease measurement approval for any reason, including, but not limited to, the following:

(1) Changes in technology, regulation, or BLM policy; or

(2) Non-compliance with the terms or conditions of approval of the off-lease measurement approval or §§ 3173.22 through 3173.26 of this subpart.

(c) The BLM will notify the operator in writing that the off-lease measurement approval has been terminated, the reason for the termination, and the effective date of the termination.

(d) If off-lease measurement is terminated, each lease, unit, or CA that was subject to the off-lease measurement will revert to measurement on the respective lease, unit, or CA.

**§ 3173.28 Instances not constituting off-lease measurement, for which no approval is required.**

(a) If the approved FMP is located on the well pad of a directionally drilled well that produces oil and gas from a lease, unit, or CA on which the well pad is not located, measurement at the FMP does not constitute off-lease measurement. However, if the FMP is located off of the well pad, regardless of distance, measurement at the FMP constitutes off-lease measurement, and BLM approval is required under §§ 3173.22 through 3173.26 of this subpart.

(b) If a lease, unit, or CA consists of more than one separate tract whose boundaries are not contiguous (e.g., a single lease comprised of two or more separate tracts), measurement of production at an FMP located on one of the tracts is not considered to be off-lease measurement if:

(1) The production is moved from one tract to another tract within the same lease, unit, or CA to another area of the lease, unit, or CA on which the FMP is located; and

(2) Production is not diverted during the movement between the tracts before the FMP, except for production used royalty free.

**§ 3173.29 Immediate assessments.**

Certain instances of noncompliance warrant the imposition of immediate assessments upon discovery, as prescribed in the following table. Imposition of these assessments does not preclude other appropriate enforcement actions:

**BILLING CODE 4310-84-P**

<b>Violations subject to an immediate assessment</b>		
<b>Violation:</b>	<b>Assessment amount per violation:</b>	<b>Assessment will be issued to:</b>
1. An appropriate valve on an oil storage tank was not sealed, as required by § 3173.2 of this subpart.	\$1,000	Operator
2. An appropriate valve or component on an oil metering system was not sealed, as required by § 3173.3 of this subpart.	\$1,000	Operator
3. A Federal seal is removed without prior approval of the AO or AR, as required by § 3173.4 of this subpart.	\$1,000	Operator, purchaser, or transporter, as appropriate
4. Oil was not properly measured before removal from storage for use on a different lease, unit, or CA, as required by § 3173.7(b) of this subpart.	\$1,000	Operator
5. An FMP was bypassed, in violation of § 3170.4 of this part.	\$1,000	Operator
6. Theft or mishandling of production was not reported to the BLM, as required by § 3173.8 of this subpart.	\$1,000	Operator, purchaser, or transporter, as appropriate
7. Records necessary to determine quantity and quality of production were not retained, as required by § 3173.9(a)(1) of this subpart for Federal operations or § 3173.9(a)(2) of this subpart for Indian operations.	\$1,000	Operator, purchaser, or transporter, as appropriate.
8. BLM approval for an FMP was not obtained before removing production, as required by § 3173.12 of this subpart.	\$1,000	Operator
9. BLM approval for off-lease measurement was not obtained before removing production, as required by § 3173.23 of this subpart.	\$1,000	Operator
10. BLM approval for surface commingling was not obtained before removing production, as required by § 3173.15 of this subpart.	\$1,000	Operator
11. BLM approval for downhole commingling was not obtained before removing production, as required by §§ 3173.14 and 3173.15 of this subpart.	\$1,000	Operator

### Appendix to Subpart 3173

#### ***I. Diagrams***

1. Site Facility Diagrams and Sealing of Valve Introduction
2. Diagrams

Diagrams	Appendix Pages	Description
I-A	1-1	Simple gas well without equipment
I-B	1-2	Simple gas well with equipment
I-C	1-3 thru 1-5	Single operator with co-located facilities single oil tank, gas, and water storage
I-D	1-6 and 1-8	Oil sales with multiple oil tanks, gas, and water storage
I-E	1-9 thru 1-12	Co-located facilities with multiple operators, oil sales by Lease Automatic Custody Transfer (LACT) system, gas, and water storage
I-F	1-13 thru 1-16	On-lease gas plant, with oil sales by LACT, Liquefied Petroleum Gas (LPG)/Natural Gas Liquids (NGL) sales by LACT, inlet gas, tailgate gas, flared or vented and plant process gas used.
I-G	1-17 thru 1-19	Enhanced recovery water injection or other water disposal facility.
I-H	1-20 thru 1-23	Pod Facility

#### ***1. Site Facility Diagrams and Sealing of Valves Introduction***

##### Introduction

**Appendix to 3173** is provided not as a requirement but solely as an example to aid operators, purchasers and transporters in determining what valves are considered to be "appropriate valves" subject to the seal requirements of this proposed rule, and to aid in the preparation of facility diagrams. It is impossible to include every type of equipment that could be used or situation that could occur in production activities. In making the determination of what is an "appropriate valve," the entire facility must be considered as a whole, including the facility size, the equipment type, and the on-going activities at the facility. The signature block, in which a company representative certifies each diagram's accuracy, may be placed directly on the diagram or on a separate piece of paper accompanying the diagram. As shown in this Appendix, the signature block may appear in a box or as a line of text.


Facility Operator/Owner Name: ABC Oil and Gas

Land Description: New Mexico Principal Meridian,  
T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

I-A

Federal/Indian Lease, unit PA, or CA Number: NMNM12345

Page 1 of 1

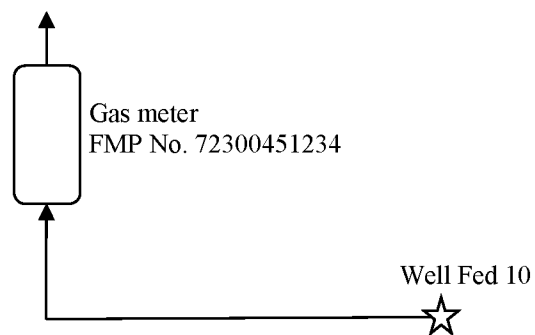

I certify on behalf of the below-listed company that the information contained in this site facility diagram is accurate and

Company Name: (print name)

Company Representative: (print name)


Representative Signature:

Date:

I-B

Facility Operator/Owner Name: ABC Oil and Gas  
Land Description: New Mexico Principal Meridian,  
T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

Federal/Indian Lease, unit PA, or CA Number: NMNM12345  
Page 1 of 1

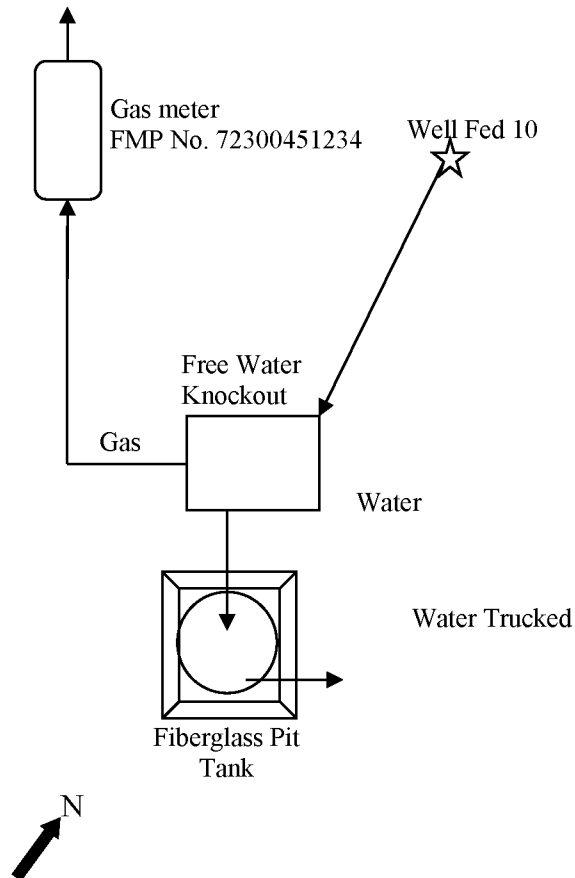

I certify on behalf of the below-listed company that the information contained in this site facility diagram is accurate and

Company Name: (print name)

Company Representative: (print name)

Representative Signature:

Date:

Free Water Knockout Manufacturer: XYZ Equipment  
Serial No. F-9876  
Gas Usage less than 0.1 Mcf/day


I-C

Facility Operator/Owner Name: ABC Oil and Gas

Federal/Indian Lease, unit PA, or CA Number: NMNM12345 and NMNM54

Land Description: New Mexico Principal Meridian, T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

I (print company representative's name) representing (print company name) certify the accuracy and completeness of the information contained in this site facility diagram. (signature of company representative) on (date signed). Page 1 of 3

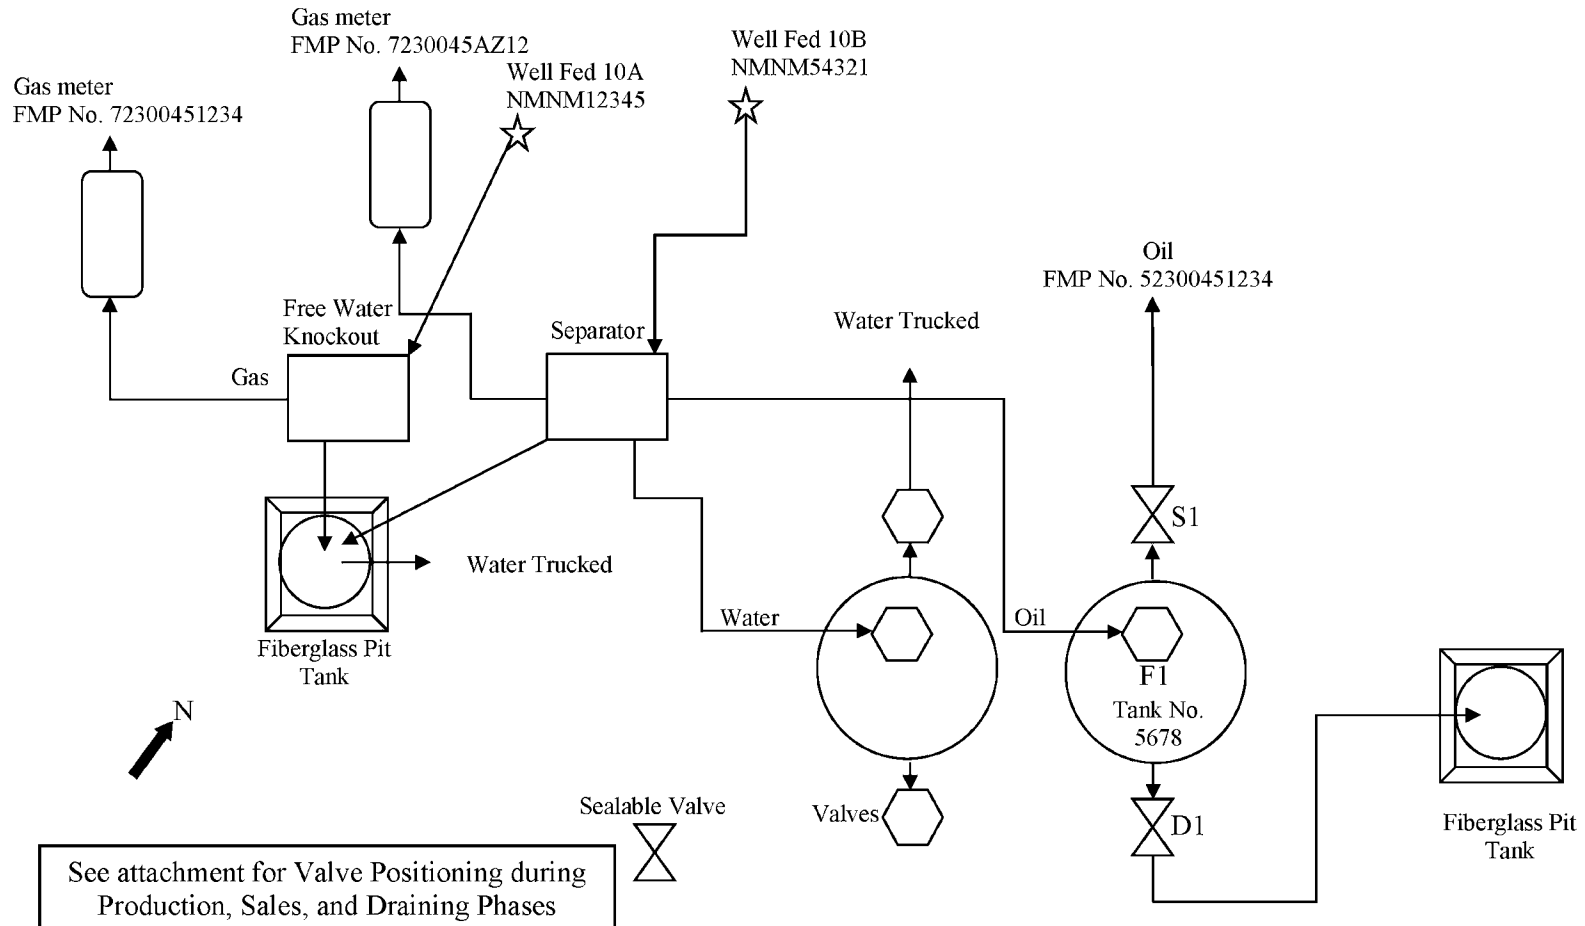



I-C  
Appendix  
Page 2 of 3

Facility Operator/Owner Name: ABC Oil and Gas

Federal/Indian Lease, unit PA, or CA Number: NMNM12345

Land Description: New Mexico Principal Meridian, T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

Diagram #I-C:

F1 is the Fill Valve

S1 is the Sales Valve

D1 is the Drain Valve

Valve Positioning in the Production Phase for FMP No. 520300451234

Production into T5678

S1 is Sealed Closed

F1 is Open

D1 is Sealed Closed

Valve Positioning in the Sales Phase for FMP No. 520300451234

Sales from T5678

S1 is Open

F1 is Open

D1 is Sealed Closed

Valve Positioning in the Drain Phase for FMP No. 520300451234

Draining from T5678

S1 is Sealed Closed

F1 is Open

D1 is Open

Free Water Knockout Manufacturer: XYZ Equipment

Serial No. F-9876

Gas Usage less than 0.1 Mcf/day

I-C  
Page 3 of 3

Facility Operator/Owner Name: ABC Oil and Gas Federal/Indian Lease, unit PA, or CA Number: NMNM12345  
Land Description: New Mexico Principal Meridian, T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

Separator Manufacturer: XYZ Equipment  
Serial No. F-9876

Fire box rated at 150,000 btu/hour (btu/hr) operated 4 months/year (mo/yr), 20 hours/day (hrs/day)  
 $150,000 \text{ btu/hr} \div 1157 \text{ btu/cubic foot (btu/ft}^3\text{)} \text{ (see current gas analysis)} \times 20 \text{ hrs} \div 1000 = 2.51 \text{ Mcf/day}$

Pump Jack Manufacturer: Hy-Lift Pumps  
Serial No.: 78563-P

Manufacturer fuel use when operated at 75% of rated maximum RPM, 5.87 Mcf/hr X operating 12 hrs. = 70.44 Mcf/day

Water Tank Manufacturer: Super Tanks

Tank Serial No. 3589412-Tank Heater rated at 200,000 btu/hr operated 4 mo/yr, 10 hrs/week,  
 $200,000 \text{ btu/hr} \div 1157 \text{ btu/ft}^3 \text{ (see current gas analysis)} \times 40 \text{ hrs/mo} \div 1000 = 6.91 \text{ MCF/mo.}$

Oil Tank Manufacturer: Super Tanks


Tank No.: 5678

Tank Serial No. 5863281-Tank Heater rated at 200,000 btu/hr operated 4 mo/yr, 5 hrs/week  
 $200,000 \text{ btu/hr} \div 1157 \text{ btu/ft}^3 \text{ (see current gas analysis)} \times 20 \text{ hrs/mo} \div 1,000 = 3.46 \text{ Mcf/mo.}$

Facility Operator/Owner Name: ABC Oil and Gas  
Land Description: New Mexico Principal Meridian,  
T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

I-D

Federal/Indian Lease, unit PA, or CA Number: NMNM12345  
Page 1 of 3

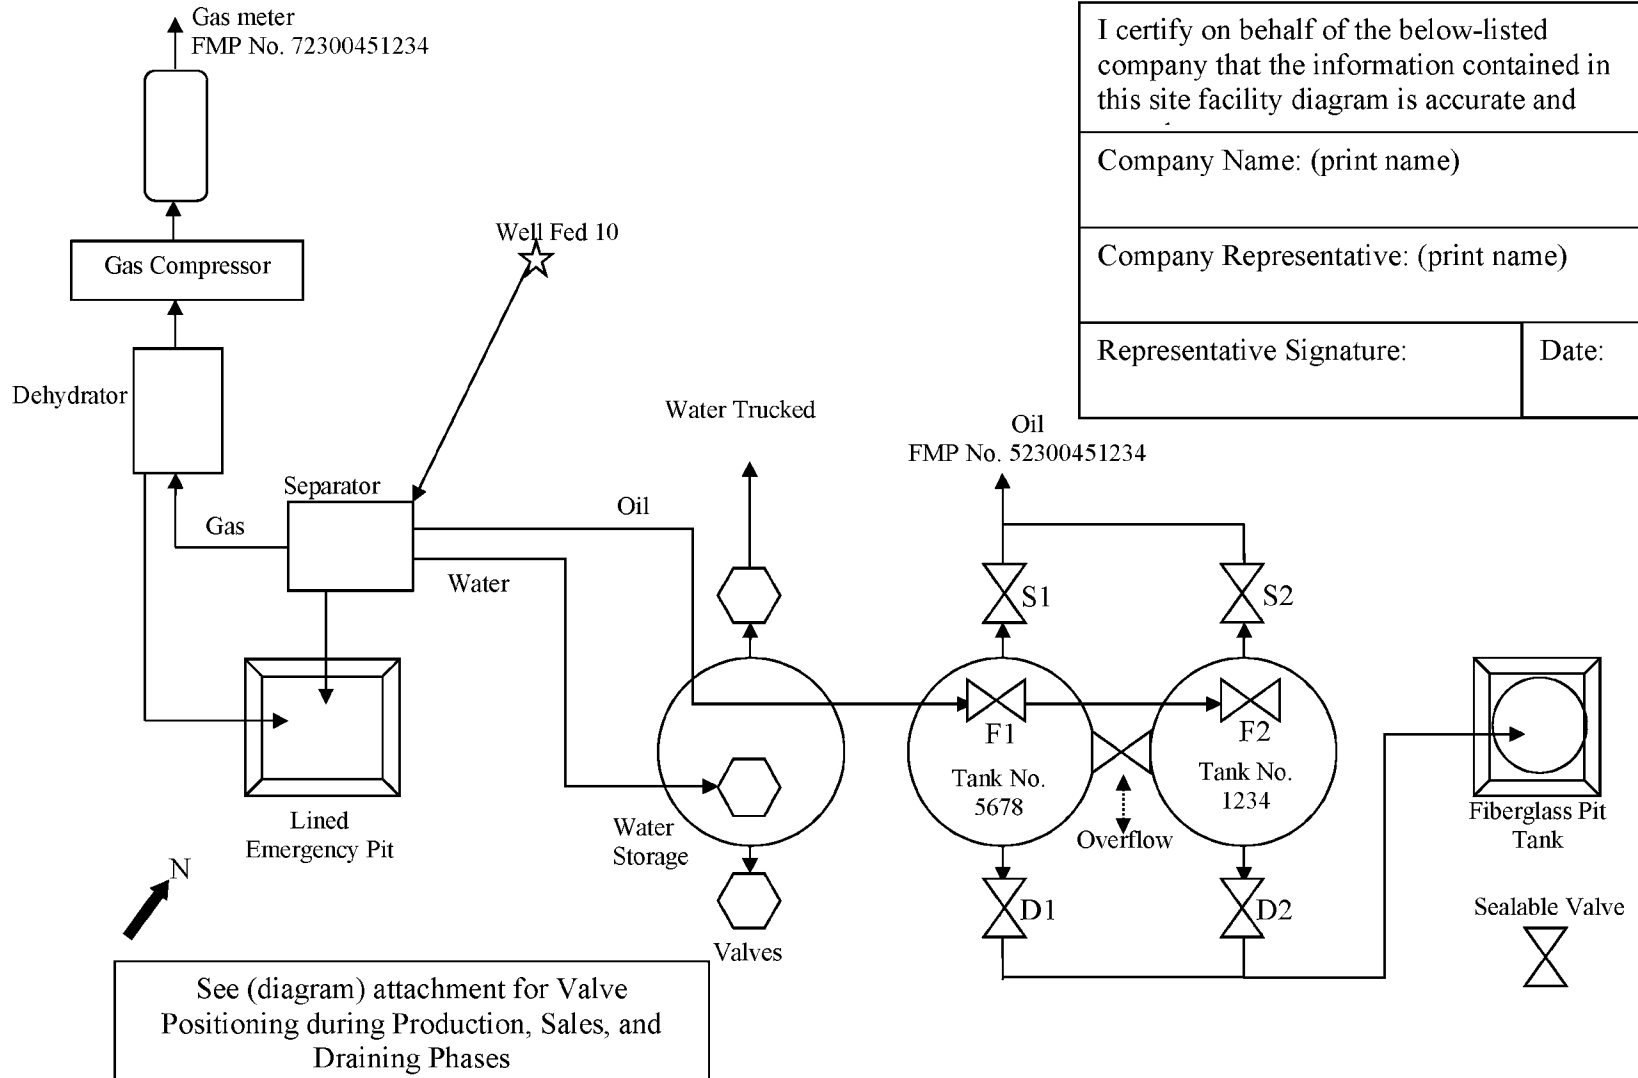

I-D  
Appendix  
Page 2 of 3

Facility Operator/Owner Name: ABC Oil and Gas Federal/Indian Lease, unit PA, or CA Number: NMNM12345  
Land Description: New Mexico Principal Meridian, T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

Diagram #I-D:

F1 and F2 are Fill Valves  
S1 and S2 are Sales Valves  
D1 and D2 are Drain Valves

Valve Positioning in the Production Phase for FMP No. 52300451234

Production into T5678	Production into T1234
S1 and D1 are Sealed Closed	S2 and D2 are Sealed Closed
Overflow is Open	Overflow is Open
F1 or F2 are Open	F1 or are F2 Open

Valve Positioning in the Sales Phase for FMP No. 52300451234

Sales from T5678 through S1:	Sales from T1234 through S2:
D1 and F1 are Sealed Closed	D2 and F2 are Sealed Closed
Overflow is Sealed Closed	Overflow is Sealed Closed
S1 is Open	S2 is Open

Valve Positioning in the Drain Phase for FMP No. 52300451234

Draining from T5678	Draining from T1234
S1 and F1 are Sealed Closed	S2 and F2 are Sealed Closed
Overflow is Sealed Closed	Overflow is Sealed Closed
D1 is Open	D2 is Open

Compressor Manufacturer: Maximum Compression

Compressor Serial No.: SWS-586324-D

Manufacturer fuel use when operated at 80% of rated maximum, 24.87 Mcf/hr X 24 hrs. = 596.88 Mcf/day

## I-D

Page 3 of 3

Facility Operator/Owner Name: ABC Oil and Gas

Federal/Indian Lease, unit PA, or CA Number: NMNM12345

Land Description: New Mexico Principal Meridian, T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

Compressor Manufacturer: Maximum Compression

Compressor Serial No.: SWS-586324-D

Manufacturer fuel use when operated at 80% of rated maximum, 24.87 Mcf/hr X 24 hrs. = 596.88 Mcf/day

Dehydrator Manufacturer: XYZ Equipment

Serial No. 5423895358

Fire box rated at 75,000 btu/hr operated, 20 hrs/day

 $75,000 \text{ btu/hr} \div 1,157 \text{ btu/ft}^3 \text{ (see current gas analysis)} \times 24 \div 1,000 = 1.56 \text{ Mcf/day}$ 

Separator Manufacturer: XYZ Equipment

Serial No. F-9876

Fire box rated at 150,000 btu/hr operated 4 mo/yr, 20 hrs/day

 $150,000 \text{ btu/hr} \div 1,157 \text{ btu/ft}^3 \text{ (see current gas analysis)} \times 20 \text{ hrs} \div 1,000 = 2.59 \text{ Mcf/day}$ 

Water Tank Manufacturer: Super Tanks

Tank Serial No. 3589412-Tank Heater rated at 200,000 btu/hr operated 4 mo/yr, 10 hrs/week, 70% efficiency

 $200,000 \text{ btu/hr} \div 1,157 \text{ btu/ft}^3 \text{ (see current gas analysis)} \times 40 \text{ hrs/mo} \div 1,000 = 6.91 \text{ Mcf/mo.}$ 

Oil Tank Manufacturer: Super Tanks

Tank No.: 5678

Tank Serial No. 5863281-Tank Heater rated at 200,000 btu/hr operated 4 mo/yr, 5 hrs/week

 $200,000 \text{ btu/hr} \div 1,157 \text{ btu/ft}^3 \text{ (see current gas analysis)} \times 20 \text{ hrs/mo} \div 1,000 = 3.46 \text{ Mcf/mo.}$ 

Oil Tank Manufacturer: Unknown

Tank No.: 1234

Tank Serial No. N/A-Tank Heater rated at 200,000 btu/hr operated 4 mo/yr, 5 hrs/week

 $200,000 \text{ btu/hr} \div 1,157 \text{ btu/ft}^3 \text{ (see current gas analysis)} \times 20 \text{ hrs/mo} \div 1,000 = 3.46 \text{ Mcf/mo.}$


I-E

Facility Operator/Owner Name: ABC Oil and Gas

Federal/Indian Lease, unit PA, or CA Number: NMNM12345

Land Description: New Mexico Principal Meridian, T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

I (print company representative's name) representing (print company name) certify the accuracy and completeness of the information contained within this site facility diagram. (signature of company representative) on (date signed). Page 1 of 4

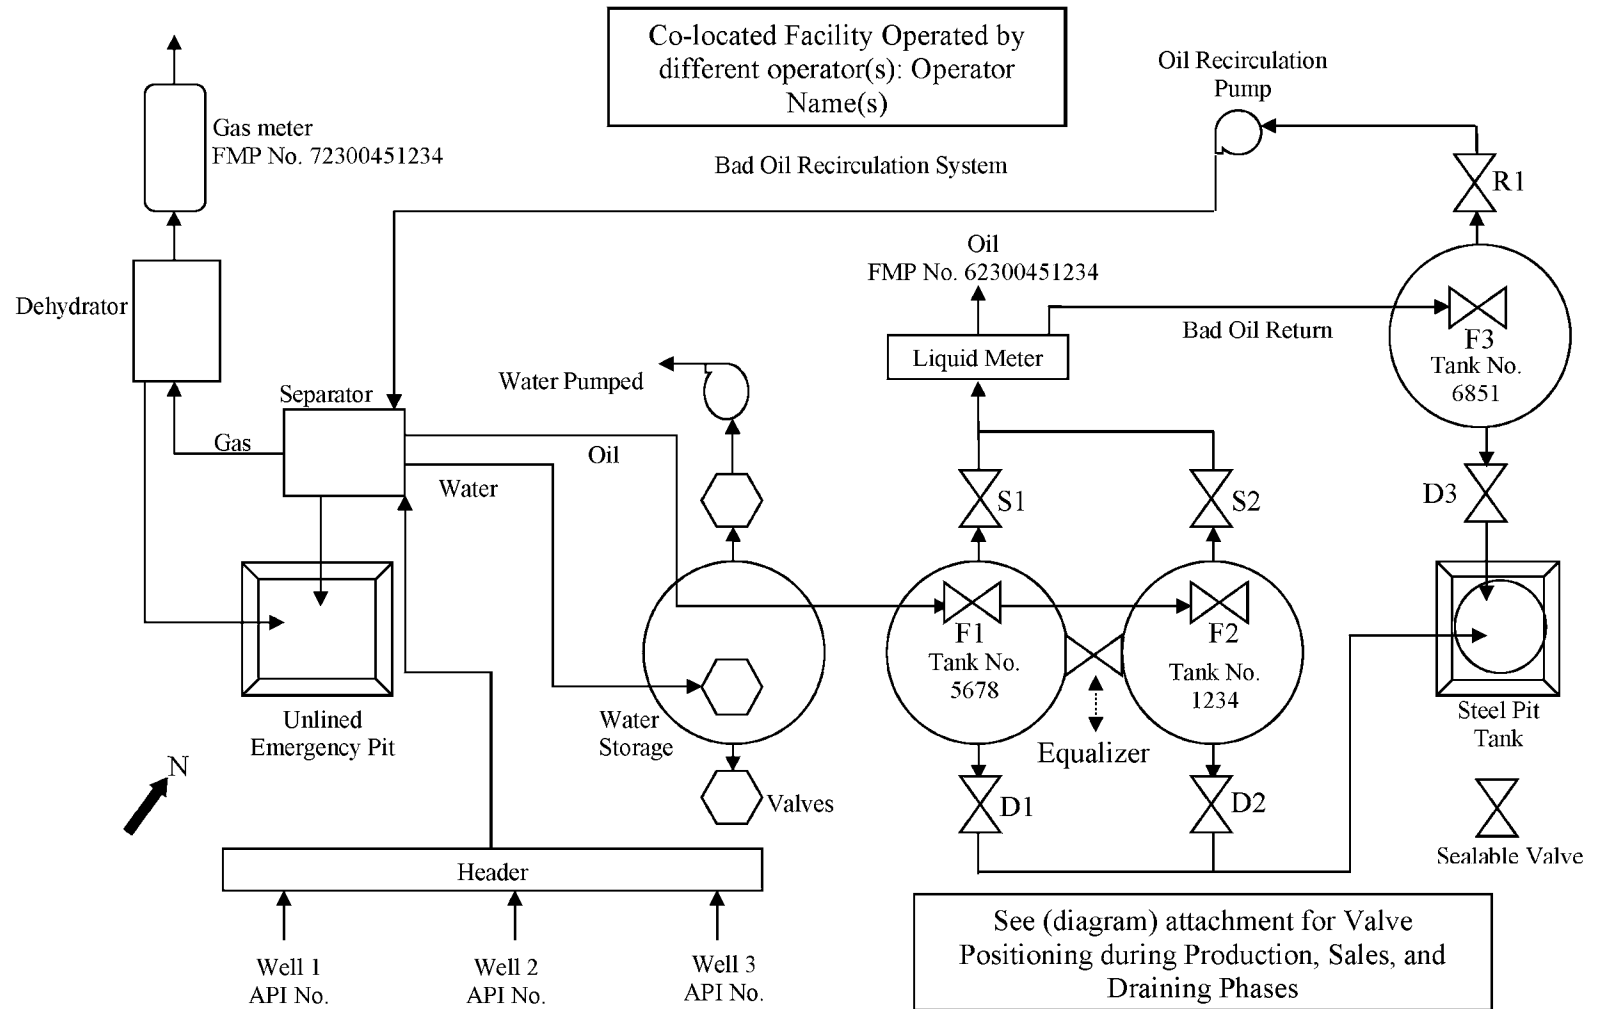

Appendix  
Page 2 of 4

Facility Operator/Owner Name: ABC Oil and Gas

Federal/Indian Lease, unit PA, or CA Number: NMNM12345

Land Description: New Mexico Principal Meridian, T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

Diagram #I-E:

F1, F2 and F3 are Fill Valves

S1 and S2 are Sales Valves

D1 and D2 are Drain Valves

R1 is a Recirculation Valve

Valve Positioning in the Production Phase for FMP No. 62300451234

Production into T5678, T1234 and 6851

S1, F1, F2, F3 and R1 are Open

D1 and D2 are Sealed Closed

Equalizer is open

Valve Positioning in the Sales Phase for FMP No. 62300451234

Production into T5678, T1234 and 6851

S1, F1, F2, F3 and R1 are Open

D1 and D2 are Sealed Closed

Equalizer is open

Valve Positioning in the Drain Phase for FMP No. 62300451234

Draining from T5678

S1 and F1 are Sealed Closed

Equalizer is Sealed Closed

D1 and S2 are Open

D2 Sealed Closed

D2 and S1 are Open

Draining from T1234

S2 and F2 are Sealed Closed

Equalizer is Sealed Closed

D1 Sealed Closed

Dehydrator Manufacturer: XYZ Equipment

Serial No. 5423895358

Fire box rated at 75,000 btu/hr operated 24 hrs/day, 20 hrs/day

$75,000 \text{ btu/hr} \div 1,157 \text{ btu/ft}^3 \text{ (see current gas analysis)} \times 24 \div 1,000 = 1.56 \text{ Mcf/day}$

I-E  
Page 3 of 4

Facility Operator/Owner Name: ABC Oil and Gas Federal/Indian Lease, unit PA, or CA Number: NMNM12345  
Land Description: New Mexico Principal Meridian, T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

Dehydrator Manufacturer: XYZ Equipment  
Serial No. 5423895358  
Fire box rated at 75,000 btu/hr operated 24 hrs/day, 20 hrs/day  
 $75,000 \text{ btu/hr} \div 1,157 \text{ btu/ft}^3 \text{ (see current gas analysis)} \times 24 \div 1,000 = 1.56 \text{ Mcf/day}$

Separator Manufacturer: XYZ Equipment  
Serial No. F-9876  
Fire box rated at 150,000 btu/hr operated 4 mo/yr, 20 hrs/day  
 $150,000 \text{ btu/hr} \div 1,157 \text{ btu/ft}^3 \text{ (see current gas analysis)} \times 20 \div 1,000 = 2.59 \text{ Mcf/day}$

Charge pump, water pump and oil recirculation pump are electric motor driven and not subject to beneficial use.

Valve Positioning in the Drain Phase for Tank No 6851

R1 is Sealed Closed  
F3 is Sealed Closed  
D3 Open



I-E  
Page 4 of 4

Facility Operator/Owner Name: ABC Oil and Gas Federal/Indian Lease, unit PA, or CA Number: NMNM12345  
Land Description: New Mexico Principal Meridian, T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

The following components on liquid measurement metering system will be effectively sealed (list as appropriate) for FMP No.: 62300451234


1. Sample probe, manufacturer, serial number;
2. Sampler volume control, manufacturer, serial number;
3. All valves on lines entering or leaving the sample container excluding the safety pop-off valve (if so equipped). Each valve must be sealed in the open or closed position, as appropriate, manufacturer, serial number;
4. Meter assembly, including the counter head and meter head, manufacturer, serial number;
5. Temperature averager, manufacturer, serial number;
6. Back-pressure valve downstream of the meter, manufacturer, serial number;
7. Any drain valves in the system;
8. Manual sampling valves (if so equipped);
9. Valves larger than 1 inch on the diverter lines;
10. Temperature recorder, manufacturer, serial number;
11. Right-angle drive, manufacturer, serial number;
12. Totalizer, manufacturer, serial number; and
13. Prover connections.

I-F

Facility Operator/Owner Name: Oil and Gas Plant Operations Inc.  
 Land Description: New Mexico Principal Meridian,  
 T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

Federal/Indian Lease, unit PA, or CA Number: NMNM12345  
 Page 1 of 4

I (print company representative's name) representing (print company name) certify the accuracy and completeness of the information contained within this site facility diagram. (signature of company representative) on (date signed).

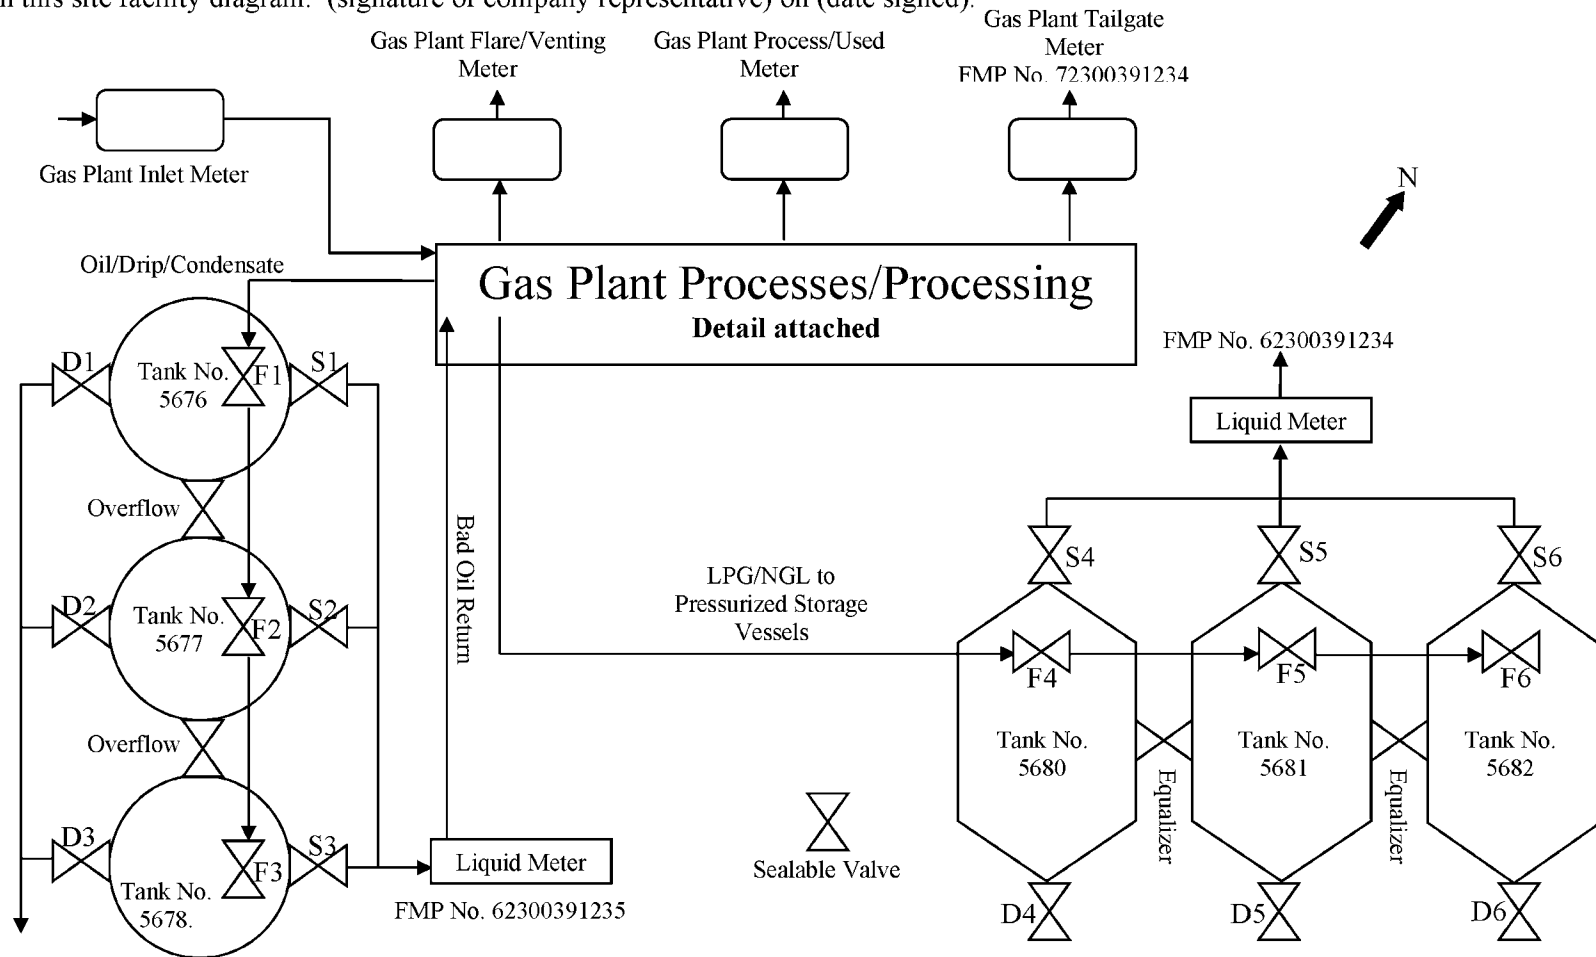

IF  
Appendix

Facility Operator/Owner Name: ABC Oil and Gas  
Land Description: New Mexico Principal Meridian,  
T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

Federal/Indian Lease, unit PA, or CA Number: NMNM12345  
Page 2 of 4

Diagram #I-F:

F1, F2, F3, F4, F5, and F6 are Fill Valves  
S1, S2, S3, S4, S5, and S6 are Sales Valves  
D1, D2, D3, D4, D5 and D6 are Drain Valves

Valve Positioning in the Production Phase for FMP No. 62300391235

Production into T5676	Production into T5677:	Production into T5678
D1 is Sealed Closed	D2 is Sealed Closed	D3 is Sealed Closed

Valve Positioning in the Sales Phase for FMP No. 62300391235

Sales from T5676 through S1:	Sales from T5677 through S2:	Sales from T5678
D1 is Sealed Closed	D2 is Sealed Closed	D3 is Sealed Closed

Valve Positioning in the Drain Phase for FMP No. 62300391235

Draining from T5676	Draining from T5677:	Draining from T5678
S1 is Sealed Closed	S2 is Sealed Closed	S3 is Sealed Closed
F1 is Sealed Closed	F2 is Sealed Closed	F3 is Sealed Closed
Overflow is Sealed Closed	Overflow is Sealed Closed	Overflow is Sealed Closed
D1 is Open	D2 is Open	D3 is Open

Valve Positioning in the Production Phase for FMP No. 62300391234

Production into T5680	Production into T5681:	Production into T5682
S4 is Sealed Closed	S5 is Sealed Closed	S6 is Sealed Closed
D4 is Sealed Closed	D5 is Sealed Closed	D6 is Sealed Closed

I-F

Facility Operator/Owner Name: ABC Oil and Gas  
Land Description: New Mexico Principal Meridian,  
T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

Federal/Indian Lease, unit PA, or CA Number: NMNM12345  
Page 3 of 4

Valve Positioning in the Sales Phase for FMP No. 62300391234

Sales from T5680 through S1:	Sales from T5681 through S2:	Sales from T5682
S4 is Sealed Closed	S5 is Sealed Closed	S6 is Sealed Closed
D4 is Sealed Closed	D5 is Sealed Closed	D6 is Sealed Closed

Valve Positioning in the Drain Phase for FMP No. 62300391234

Draining from T5680	Draining from T5681:	Draining from T5682
S4 is Sealed Closed	S5 is Sealed Closed	S6 is Sealed Closed
F4 is Sealed Closed	F5 is Sealed Closed	F6 is Sealed Closed
Overflow is Sealed Closed	Overflow is Sealed Closed	Overflow is Sealed Closed
D4 is Open	D5 is Open	D6 is Open

Gas Plant Inlet Meter

Meter Manufacturer: ABC Metering  
Meter Serial No.: G-25684523  
Meter Tube Manufacturer and Serial No.: Best Meter Tubes, VUH2635X

Gas Plant Flared/Venting Meter

Meter Manufacturer: ABC Metering  
Meter Serial No.: R-25368456  
Meter Tube Manufacturer and Serial No.: Best Meter Tubes, BAS23587ADD

Gas Plant Process/Used Meter

Meter Manufacturer: ABC Metering  
Meter Serial No.: H-398742  
Meter Tube Manufacturer and Serial No.: Best Meter Tubes, FG15783854HJK

I-F

Facility Operator/Owner Name: ABC Oil and Gas  
Land Description: New Mexico Principal Meridian,  
T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

Federal/Indian Lease, unit PA, or CA Number: NMNM12345  
Page 4 of 4

Gas Plant Process/Used Meter

Meter Manufacturer: ABC Metering  
Meter Serial No.: H-398742  
Meter Tube Manufacturer and Serial No.: Best Meter Tubes, FG15783854HJK

The following components on liquid measurement metering system will be effectively sealed (list as appropriate) for FMP No.: 62300451234


1. Sample probe, manufacturer, serial number;
2. Sampler volume control, manufacturer, serial number;
3. All valves on lines entering or leaving the sample container excluding the safety pop-off valve (if so equipped). Each valve must be sealed in the open or closed position, as appropriate, manufacturer, serial number;
4. Meter assembly, including the counter head and meter head;
5. Temperature averager, manufacturer, serial number;
6. Back-pressure valve downstream of the meter, manufacturer, serial number;
7. Any drain valves in the system;
8. Manual sampling valves (if so equipped);
9. Valves larger than 1 inch on the diverter lines;
10. Temperature recorder, manufacturer, serial number;
11. Right-angle drive, manufacturer, serial number;
12. Totalizer, manufacturer, serial number; and
13. Prover connections.

I-G

Facility Operator/Owner Name: ABC Oil and Gas  
 Land Description: New Mexico Principal Meridian,  
 T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

Federal/Indian Lease, unit PA, or CA Number: NMNM98765  
 Page 1 of 3

I (print company representative's name) representing (print company name) certify the accuracy and completeness of the information contained within this site facility diagram. (signature of company representative) on (date signed).

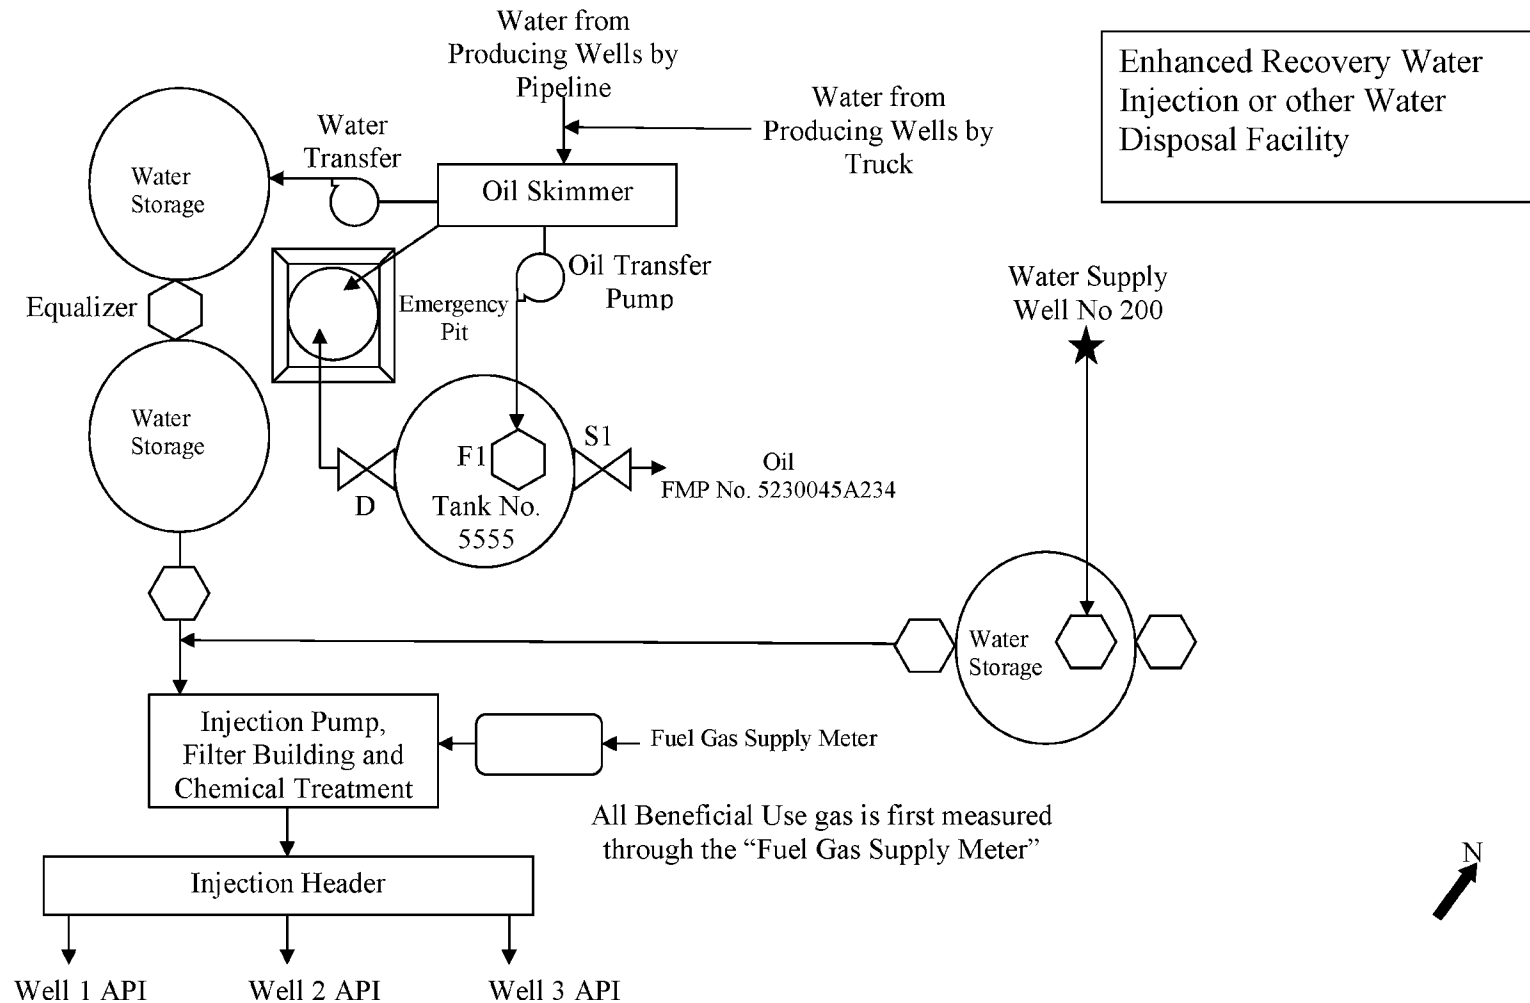

I-G

Appendix

Facility Operator/Owner Name: ABC Oil and Gas  
Land Description: New Mexico Principal Meridian,  
T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

Federal/Indian Lease, unit PA, or CA Number: NMNM98765  
Page 2 of 3

Diagram #I-G:

F1 is the Fill Valve  
S1 is the Sales Valve  
D1 is the Drain Valve

Valve Positioning in the Production Phase for FMP No. 52030045A234

Production into T5555  
S1 is Sealed Closed  
F1 is Open  
D1 is Sealed Closed

Valve Positioning in the Sales Phase for FMP No. 52030045A234

Sales form T5555  
S1 is Open  
F1 is Open  
D1 is Sealed Closed

Valve Positioning in the Drain Phase for FMP No. 52030045A234

Draining from T5555  
S1 is Sealed Closed  
F1 is Open  
D1 is Open

Oil Tank Manufacturer: Super Tanks  
Tank No.: 5555  
Tank Serial No. 5863281

I-G

Page 3 of 3:

Fuel gas meter

Meter Manufacturer: ABC Metering

Meter Serial No.: F-258645

Meter Tube Manufacturer and Serial No.: Best Meter Tubes, DRFG254




I-H


Facility Operator/Owner Name: ABC Oil and Gas  
Land Description: New Mexico Principal Meridian,  
T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

Federal/Indian Lease, unit PA, or CA Number: NMNM98765  
Page 1 of 4

I (print company representative's name) representing (print company name) certify the accuracy and completeness of the information contained within this site facility diagram. (Signature of company representative) on (Date signed).

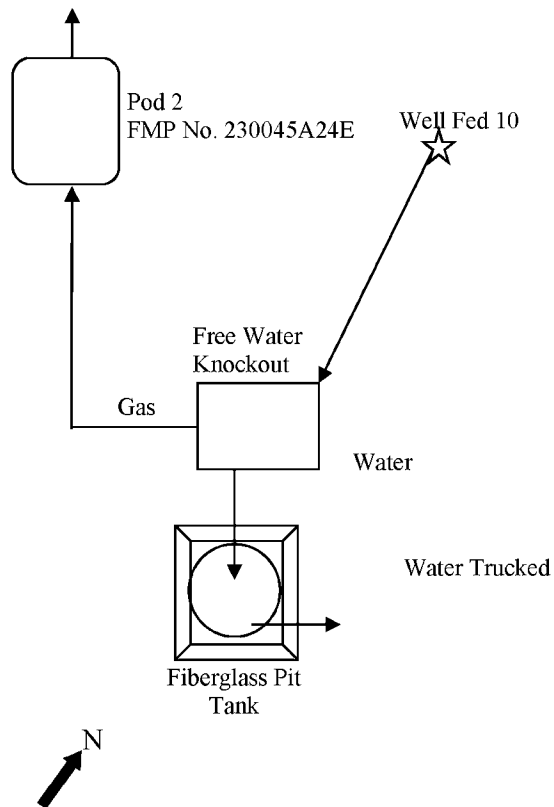

Pod 1




Free Water Knockout Manufacturer: XYZ Equipment  
Serial No. F-9876  
Gas Usage less than 0.1 Mcf/day


Facility Operator/Owner Name: ABC Oil and Gas  
Land Description: New Mexico Principal Meridian,  
T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

I-H  
Federal/Indian Lease, unit PA, or CA Number: NMNM98765  
Page 2 of 4

POD Facility  
2

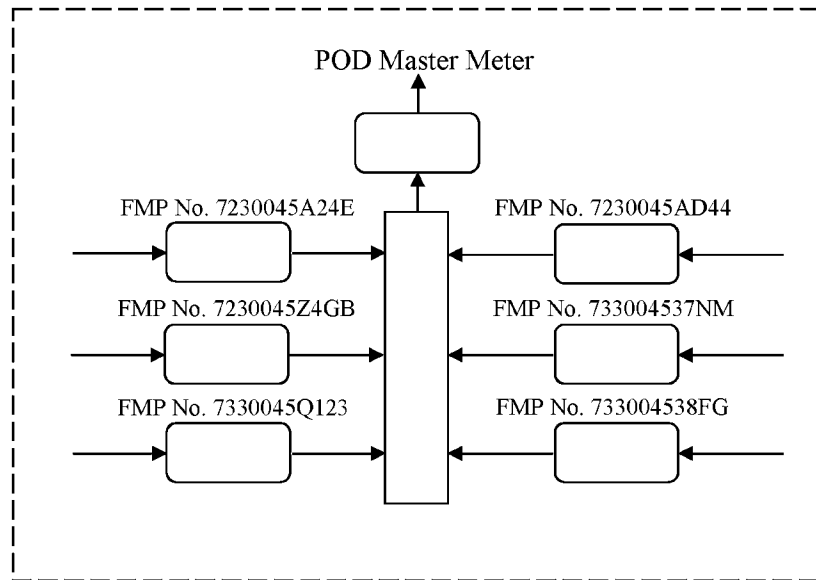

POD Facility  
1

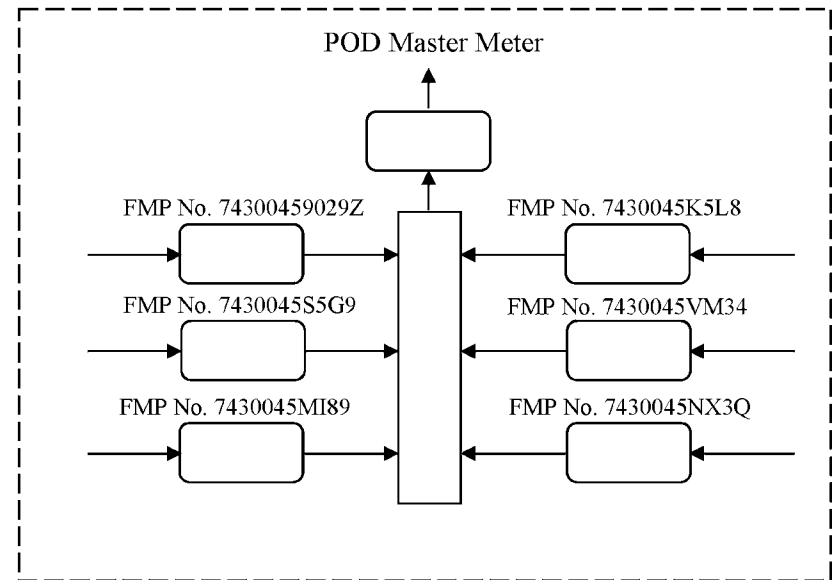

Facility Operator/Owner Name: ABC Oil and Gas  
Land Description: New Mexico Principal Meridian,  
T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

I-H

Federal/Indian Lease, unit PA, or CA Number: NMNM98765  
Page 3 of 4

POD 1

Master Meter

Meter Manufacturer: ABC Metering  
Meter Serial No.: C-4869A  
Meter Tube Manufacturer: Best Meter Tubes  
Meter Tube Serial No.: DTHG111

FMP No. 74300459029Z

Federal/Indian Lease, unit PA, or CA Number: NMNM98765

FMP No. 7430045K5L8

Federal/Indian Lease, unit PA, or CA Number: NMNM98765

FMP No. 7430045S5G9

Federal/Indian Lease, unit PA, or CA Number: NMNM1234A

FMP No. 7430045VM34

Federal/Indian Lease, unit PA, or CA Number: NMNM56789D

FMP No. 7430045MI89

Federal/Indian Lease, unit PA, or CA Number: NMSF10254

FMP No. 7430045NX3Q

Federal/Indian Lease, unit PA, or CA Number: NMSF10254

I-H  
Federal/Indian Lease, unit PA, or CA Number: NMNM98765  
Page 4 of 4

Facility Operator/Owner Name: ABC Oil and Gas  
Land Description: New Mexico Principal Meridian,  
T. 36 N., R. 11 W., sec. 2, NW1/4NE1/4

POD 2

Master Meter

Meter Manufacturer: ABC Metering  
Meter Serial No.: C-43948869A  
Meter Tube Manufacturer: Best Meter Tubes  
Meter Tube Serial No.: DTHG112611

FMP No. 74300459029Z  
Federal/Indian Lease, unit PA, or CA Number: NMNM56789

FMP No. 7430045K5L8  
Federal/Indian Lease, unit PA, or CA Number: NMNM54321A

FMP No. 7430045S5G9  
Federal/Indian Lease, unit PA, or CA Number: NMNM1234C

FMP No. 7430045VM34  
Federal/Indian Lease, unit PA, or CA Number: NMNM56789B

FMP No. 7430045MI89  
Federal/Indian Lease, unit PA, or CA Number: NMSF10983

FMP No. 7430045NX3Q  
Federal/Indian Lease, unit PA, or CA Number: NMSF10254



# FEDERAL REGISTER

---

Vol. 80

Monday,

No. 133

July 13, 2015

---

## Part IV

### Federal Deposit Insurance Corporation

---

12 CFR Part 327

Assessments; Proposed Rule

## FEDERAL DEPOSIT INSURANCE CORPORATION

### 12 CFR Part 327

RIN 3064-AE37

### Assessments

**AGENCY:** Federal Deposit Insurance Corporation (FDIC).

**ACTION:** Notice of proposed rulemaking (NPR) and request for comment.

**SUMMARY:** The FDIC is proposing to amend 12 CFR part 327 to refine the deposit insurance assessment system for small insured depository institutions that have been federally insured for at least 5 years (established small banks) by: revising the financial ratios method so that it would be based on a statistical model estimating the probability of failure over three years; updating the financial measures used in the financial ratios method consistent with the statistical model; and eliminating risk categories for established small banks and using the financial ratios method to determine assessment rates for all such banks (subject to minimum or maximum initial assessment rates based upon a bank's CAMELS composite rating). The FDIC does not propose changing the range of assessment rates that will apply once the Deposit Insurance Fund (DIF or fund) reserve ratio reaches 1.15 percent; thus, under the proposal, as under current regulations, the range of initial deposit insurance assessment rates will fall once the reserve ratio reaches 1.15 percent. The FDIC proposes that a final rule would go into effect the quarter after a final rule is adopted; by their terms, however, the proposed amendments would not become operative until the quarter after the DIF reserve ratio reaches 1.15 percent.

**DATES:** Comments must be received by the FDIC no later than September 11, 2015.

**ADDRESSES:** You may submit comments on the notice of proposed rulemaking using any of the following methods:

- **Agency Web site:** <http://www.fdic.gov/regulations/laws/federal/>. Follow the instructions for submitting comments on the agency Web site.
- **Email:** [comments@fdic.gov](mailto:comments@fdic.gov). Include RIN 3064-AE37 on the subject line of the message.
- **Mail:** Robert E. Feldman, Executive Secretary, Attention: Comments, Federal Deposit Insurance Corporation, 550 17th Street NW., Washington, DC 20429.
- **Hand Delivery:** Comments may be hand delivered to the guard station at

the rear of the 550 17th Street Building (located on F Street) on business days between 7 a.m. and 5 p.m.

- **Public Inspection:** All comments received, including any personal information provided, will be posted generally without change to <http://www.fdic.gov/regulations/laws/federal>.

**FOR FURTHER INFORMATION CONTACT:** Munsell St.Clair, Chief, Banking and Regulatory Policy, Division of Insurance and Research, 202-898-8967; Nefretete Smith, Senior Attorney, Legal Division, 202-898-6851; Thomas Hearn, Counsel, Legal Division, 202-898-6967.

### SUPPLEMENTARY INFORMATION:

#### I. Policy Objectives

The Federal Deposit Insurance Act (FDI Act) requires that the FDIC Board of Directors (Board) establish a risk-based deposit insurance assessment system.<sup>1</sup> Pursuant to this requirement, the FDIC adopted a risk-based deposit insurance assessment system effective in 1993 that applied to all banks.<sup>2</sup> A risk-based assessment system reduces the subsidy that lower-risk banks provide higher-risk banks and provides incentives for banks to monitor and reduce risks that could increase potential losses to the DIF. Since 1993, the FDIC has met its statutory mandate and has pursued these policy goals by periodically introducing improvements in the deposit insurance assessment system's ability to differentiate for risk. The primary purpose of the proposals in this NPR is to improve the risk-based deposit insurance assessment system applicable to small banks to more accurately reflect risk.<sup>3</sup>

<sup>1</sup> 12 U.S.C. 1817(b). A "risk-based assessment system" means a system for calculating an insured depository institution's assessment based on the institution's probability of causing a loss to the DIF due to the composition and concentration of the institution's assets and liabilities, the likely amount of any such loss, and the revenue needs of the DIF. See 12 U.S.C. 1817(b)(1)(C).

<sup>2</sup> As used in this NPR, the term "bank" is synonymous with the term "insured depository institution" as it is used in section 3(c)(2) of the FDI Act, 12 U.S.C. 1813(c)(2).

On January 1, 2007, the FDIC instituted separate assessment systems for small and large banks. 71 FR 69282 (Nov. 30, 2006). See 12 U.S.C. 1817(b)(1)(D) (granting the Board the authority to establish separate risk-based assessment systems for large and small insured depository institutions).

<sup>3</sup> As used in this NPR, the term "small bank" is synonymous with the term "small institution" as it is used in 12 CFR 327.8. In general, a "small bank" is one with less than \$10 billion in total assets.

#### II. Background

##### *Risk-Based Deposit Insurance Assessments for Small Banks*

Since 2007, assessment rates for small banks have been determined by placing each bank into one of four risk categories, Risk Categories I, II, III, and IV. These four risk categories are based on two criteria: capital levels and supervisory ratings. The three capital groups—well capitalized, adequately capitalized, and undercapitalized—are based on the leverage ratio and three risk-based capital ratios used for regulatory capital purposes.<sup>4</sup> The three supervisory groups, termed A, B, and C, are based upon supervisory evaluations by the small bank's primary federal regulator, state regulator or the FDIC.<sup>5</sup> Group A consists of financially sound institutions with only a few minor weaknesses (generally, banks with CAMELS<sup>6</sup> composite ratings of 1 or 2); Group B consists of institutions that demonstrate weaknesses that, if not corrected could result in significant deterioration of the institution and increased risk of loss to the DIF (generally, banks with CAMELS composite ratings of 3); and Group C consists of institutions that pose a substantial probability of loss to the DIF unless effective corrective action is taken (generally, banks with CAMELS composite ratings of 4 or 5). An institution's capital and supervisory group determine its risk category as set out in Table 1 below.

<sup>4</sup> The common equity tier 1 capital ratio, a new risk-based capital ratio, was incorporated into the deposit insurance assessment system effective January 1, 2015. 79 FR 70427 (November 26, 2014). Beginning January 1, 2018, a supplementary leverage ratio will also be used to determine whether an advanced approaches bank is: (a) well capitalized, if the bank is subject to the enhanced supplementary leverage ratio standards under 12 CFR 6.4(c)(1)(iv)(B), 12 CFR 208.43(c)(1)(iv)(B), or 12 CFR 324.403(b)(1)(vi), as each may be amended from time to time; and (b) adequately capitalized, if the bank is subject to the advanced approaches risk-based capital rules under 12 CFR 6.4(c)(2)(iv)(B), 12 CFR 208.43(c)(2)(iv)(B), or 12 CFR 324.403(b)(2)(vi), as each may be amended from time to time. 79 FR 70427, 70437 (November 26, 2014.) The supplementary leverage ratio is expected to affect the capital group assignment of few, if any, small banks.

<sup>5</sup> The term "primary federal regulator" is synonymous with the term "appropriate federal banking agency" as it is used in section 3(q) of the FDI Act, 12 U.S.C. 1813(q).

<sup>6</sup> A financial institution is assigned a composite rating based on an evaluation and rating of six essential components of an institution's financial condition and operations. These component factors address the adequacy of capital (C), the quality of assets (A), the capability of management (M), the quality and level of earnings (E), the adequacy of liquidity (L), and the sensitivity to market risk (S).

TABLE 1—DETERMINATION OF RISK CATEGORY

Capital group	Supervisory group			
	A CAMELS 1 or 2	B CAMELS 3	C CAMELS 4 or 5	
Well Capitalized .....	Risk Category I.			
Adequately Capitalized .....	Risk Category II		Risk Category III.	
Under Capitalized .....	Risk Category III		Risk Category IV	

To further differentiate risk within Risk Category I (which includes most small banks), the FDIC uses the *financial ratios method*, which combines supervisory CAMELS component ratings with current financial ratios to determine a small Risk Category I bank's initial assessment rate.<sup>7</sup>

Within Risk Category I, those institutions that pose the least risk are charged a minimum initial assessment rate and those that pose the greatest risk are charged an initial assessment rate that is four basis points higher than the minimum. All other banks within Risk Category I are charged a rate that varies between these rates. In contrast, all banks in Risk Category II are charged the same initial assessment rate, which is higher than the maximum initial rate for Risk Category I. A single, higher, initial assessment rate applies to each bank in Risk Category III and another, higher, rate to each bank in Risk Category IV.<sup>8</sup>

The financial ratios method determines the assessment rates in Risk Category I using a combination of weighted CAMELS component ratings and the following financial ratios:

- Tier 1 Leverage Ratio;
- Net Income before Taxes/Risk-Weighted Assets;
- Nonperforming Assets/Gross Assets;
- Net Loan Charge-Offs/Gross Assets;
- Loans Past Due 30–89 days/Gross Assets;
- Adjusted Brokered Deposit Ratio; and

- Weighted Average CAMELS Composite Rating.<sup>9</sup>

To determine a Risk Category I bank's initial assessment rate, the weighted CAMELS components and financial ratios are multiplied by statistically derived pricing multipliers, the products are summed, and the sum is added to a uniform amount that applies to all Risk Category I banks. If, however, the rate is below the minimum initial assessment rate for Risk Category I, the bank will pay the minimum initial assessment rate; if the rate derived is above the maximum initial assessment rate for Risk Category I, then the bank will pay the maximum initial rate for the risk category.

The financial ratios used to determine rates come from a statistical model that predicts the probability that a Risk Category I institution will be downgraded from a composite CAMELS rating of 1 or 2 to a rating of 3 or worse within one year. The probability of a CAMELS downgrade is intended as a proxy for the bank's probability of failure. When the model was developed in 2006, the FDIC decided not to attempt to determine a bank's probability of failure because of the lack of bank failures in the years between the end of the bank and thrift crisis in the early 1990s and 2006.<sup>10</sup>

The financial ratios method does not apply to new small banks or to insured branches of foreign banks (insured branches).<sup>11</sup> The manner in which assessment rates for these institutions is determined is described further below.

#### Assessment Rates Under Current Rules

The Dodd-Frank Wall Street Reform and Consumer Protection Act (the Dodd-Frank Act), enacted in July 2010, revised the statutory authorities governing the FDIC's management of the DIF. The Dodd-Frank Act granted the FDIC authority to manage the fund in a manner that would help maintain a positive fund balance during a banking crisis and promote moderate, steady assessment rates throughout economic credit cycles.<sup>12</sup>

Among other things, the Dodd-Frank Act: (1) raised the minimum designated reserve ratio (DRR), which the FDIC must set each year, to 1.35 percent (from the former minimum of 1.15 percent) and removed the upper limit on the DRR (which was formerly capped at 1.5 percent);<sup>13</sup> (2) required that the fund reserve ratio reach 1.35 percent by September 30, 2020 (rather than 1.15 percent by the end of 2016, as formerly required);<sup>14</sup> and (3) required that, in setting assessments, the FDIC “offset the effect of [requiring that the reserve ratio reach 1.35 percent by September 30, 2020 rather than 1.15 percent by the end of 2016] on insured depository institutions with total consolidated assets of less than \$10,000,000,000.”<sup>15</sup>

In 2011, the FDIC adopted a schedule of assessment rates designed to ensure that the reserve ratio reaches 1.15 percent by September 30, 2020.<sup>16</sup> In the near future, the FDIC plans to propose a rule to implement the Dodd-Frank Act requirement that the cost of raising the reserve ratio from 1.15 percent to 1.35

<sup>7</sup> New small banks in Risk Category I, however, are charged the highest initial assessment rate in effect for that risk category. Subject to exceptions, a new bank is one that has been federally insured for less than five years as of the last day of any quarter for which it is being assessed. 12 CFR 327.8(f).

<sup>8</sup> In 2011, the Board revised and approved regular assessment rate schedules. See 76 FR 10672 (Feb. 25, 2011); 12 CFR 327.10.

<sup>9</sup> The weights applied to CAMELS components are as follows: 25 percent each for Capital and Management; 20 percent for Asset quality; and 10 percent each for Earnings, Liquidity, and Sensitivity to market risk. These weights reflect the view of the

FDIC regarding the relative importance of each of the CAMELS components for differentiating risk among institutions for deposit insurance purposes. The FDIC and other bank supervisors do not use such a system to determine CAMELS composite ratings.

<sup>10</sup> See 71 FR 41910, 41913 (July 24, 2006).

<sup>11</sup> Insured branches of foreign banks are deemed small banks for purposes of the deposit insurance assessment system.

<sup>12</sup> 12 U.S.C. 1817(e) (granting the Board the discretion to suspend or limit dividends).

<sup>13</sup> 12 U.S.C. 1817(b)(3)(B).

<sup>14</sup> Public Law 111–203, 334(d), 124 Stat. 1376, 1539 (12 U.S.C. 1817(note)).

<sup>15</sup> Public Law 111–203, 334(e), 124 Stat. 1376, 1539 (12 U.S.C. 1817(note)). The Dodd-Frank Act also: (1) eliminated the requirement that the FDIC provide dividends from the fund when the reserve ratio is between 1.35 percent and 1.5 percent, 12 U.S.C. 1817(e), and (2) continued the FDIC's authority to declare dividends when the reserve ratio at the end of a calendar year is at least 1.5 percent, but granted the FDIC sole discretion in determining whether to suspend or limit the declaration of payment or dividends, 12 U.S.C. 1817(e)(2)(A)–(B).

<sup>16</sup> See 76 FR 10672.

percent be paid by banks with \$10 billion or more in assets.

The current initial assessment rates for small and large banks are set forth in Table 2 below.

**TABLE 2—INITIAL BASE ASSESSMENT RATES**  
[In basis points per annum]

	Risk category					
	I*		II	III	IV	Large & highly complex institutions**
	Minimum	Maximum				
Annual Rates (in basis points) .....	5	9	14	23	35	5–35

\* Initial base rates that are not the minimum or maximum will vary between these rates.

\*\* See § 327.8(f) and § 327.8(g) for the definition of large and highly complex institutions.

An institution's total assessment rate may vary from the initial assessment rate as the result of possible

adjustments.<sup>17</sup> After applying all possible adjustments, minimum and maximum total assessment rates for

each risk category are set forth in Table 3 below.

**TABLE 3—TOTAL BASE ASSESSMENT RATES\***  
[In basis points per annum]

	Risk category I	Risk category II	Risk category III	Risk category IV	Large & highly complex institutions**
Initial Assessment Rate .....	5–9	14	23	35	5–35
Unsecured Debt Adjustment *** .....	–4.5 to 0	–5 to 0	–5 to 0	–5 to 0	–5 to 0
Brokered Deposit Adjustment .....	N/A	0 to 10	0 to 10	0 to 10	0 to 10
Total Assessment Rate .....	2.5 to 9	9 to 24	18 to 33	30 to 45	2.5 to 45

\* Total base assessment rates do not include the DIDA.

\*\* See § 327.8(f) and (g) for the definition of large and highly complex institutions.

\*\*\* The unsecured debt adjustment cannot exceed the lesser of 5 basis points or 50 percent of an insured depository institution's initial base assessment rate. The unsecured debt adjustment does not apply to new banks or insured branches.

Before adopting the current assessment rate schedules, the FDIC undertook a historical analysis to determine how high the reserve ratio would have to have been to have maintained both a positive balance and stable assessment rates from 1950 through 2010.<sup>18</sup> The analysis shows that the fund reserve ratio would have needed to be approximately 2 percent or more before the onset of the 1980s and 2008 crises to maintain both a positive fund balance and stable assessment

rates, assuming, in lieu of dividends, that the long-term industry average nominal assessment rate would have been reduced by 25 percent when the reserve ratio reached 2 percent, and by 50 percent when the reserve ratio reached 2.5 percent.

In 2011, consistent with the FDIC's historical analysis and the FDIC's long-term fund management plan adopted as a result of the historical analysis, the Board adopted lower, moderate assessment rates that will go into effect

when the DIF reserve ratio reaches 1.15 percent.<sup>19</sup> Pursuant to the FDIC's authority to set assessments, the initial base and total base assessment rates set forth in Table 4 below will take effect beginning the assessment period after the fund reserve ratio first meets or exceeds 1.15 percent, without the necessity of further action by the Board. The rates will remain in effect unless and until the reserve ratio meets or exceeds 2 percent.<sup>20</sup>

<sup>17</sup> A bank's total base assessment rate can vary from its initial base assessment rate as the result of three possible adjustments. Two of these adjustments—the unsecured debt adjustment and the depository institution debt adjustment (DIDA)—apply to all banks (except that the unsecured debt adjustment does not apply to new banks or insured branches). The unsecured debt adjustment lowers a bank's assessment rate based on the bank's ratio of long-term unsecured debt to the bank's assessment base. The DIDA increases a bank's assessment rate

when it holds long-term, unsecured debt issued by another insured depository institution. The third possible adjustment—the brokered deposit adjustment—applies only to small banks in Risk Category II, III and IV (and to large and highly complex institutions that are not well capitalized or that are not CAMELS composite 1 or 2-rated). It does not apply to insured branches. The brokered deposit adjustment increases a bank's assessment when it holds significant amounts of brokered deposits. 12 CFR 327.9 (d).

<sup>18</sup> The historical analysis and long-term fund management plan are described at 76 FR at 10675 and 75 FR 66272, 66272–281 (Oct. 27, 2010).

<sup>19</sup> See 76 FR at 10717–720.

<sup>20</sup> For new banks, however, the rates will remain in effect even if the reserve ratio equals or exceeds 2 percent (or 2.5 percent).

<sup>21</sup> The reserve ratio for the immediately prior assessment period must also be less than 2 percent.



TABLE 4—INITIAL AND TOTAL BASE ASSESSMENT RATES \*

[In basis points per annum]

[Once the reserve ratio reaches 1.15 percent]<sup>21</sup>

	Risk category I	Risk category II	Risk category III	Risk category IV	Large & highly complex institutions **
Initial Base Assessment Rate .....	3–7	12	19	30	3–30
Unsecured Debt Adjustment *** .....	–3.5 to 0	–5 to 0	–5 to 0	–5 to 0	–5 to 0
Brokered Deposit Adjustment .....	N/A	0 to 10	0 to 10	0 to 10	0 to 10
Total Base Assessment Rate .....	1.5 to 7	7 to 22	14 to 29	25 to 40	1.5 to 40

\* Total base assessment rates do not include the DIDA.

\*\* See § 327.8(f) and (g) for the definition of large and highly complex institutions.

\*\*\* The unsecured debt adjustment cannot exceed the lesser of 5 basis points or 50 percent of an insured depository institution's initial base assessment rate; thus, for example, an insured depository institution with an initial base assessment rate of 3 basis points will have a maximum unsecured debt adjustment of 1.5 basis points and cannot have a total base assessment rate lower than 1.5 basis points. The unsecured debt adjustment does not apply to new banks or insured branches.

In lieu of dividends, and pursuant to the FDIC's authority to set assessments and consistent with the FDIC's long-term fund management plan, the initial

base and total base assessment rates set forth in Table 5 below will come into effect without further action by the Board when the fund reserve ratio at the

end of the prior assessment period meets or exceeds 2 percent, but is less than 2.5 percent.<sup>22</sup>

TABLE 5—INITIAL AND TOTAL BASE ASSESSMENT RATES\*

[In basis points per annum]

[If the reserve ratio for the prior assessment period is equal to or greater than 2 percent and less than 2.5 percent]

	Risk category I	Risk category II	Risk category III	Risk category IV	Large & highly complex institutions **
Initial Base Assessment Rate .....	2–6	10	17	28	2–28
Unsecured Debt Adjustment *** .....	–3 to 0	–5 to 0	–5 to 0	–5 to 0	–5 to 0
Brokered Deposit Adjustment .....	N/A	0 to 10	0 to 10	0 to 10	0 to 10
Total Base Assessment Rate .....	1 to 6	5 to 20	12 to 27	23 to 38	1 to 38

\* Total base assessment rates do not include the DIDA.

\*\* See § 327.8(f) and (g) for the definition of large and highly complex institutions.

\*\*\* The unsecured debt adjustment cannot exceed the lesser of 5 basis points or 50 percent of an insured depository institution's initial base assessment rate; thus, for example, an insured depository institution with an initial base assessment rate of 2 basis points will have a maximum unsecured debt adjustment of 1 basis point and cannot have a total base assessment rate lower than 1 basis point. The unsecured debt adjustment does not apply to insured branches.

The initial base and total base assessment rates set forth in Table 6 below will come into effect, again,

without further action by the Board when the fund reserve ratio at the end

of the prior assessment period meets or exceeds 2.5 percent.

TABLE 6—INITIAL AND TOTAL BASE ASSESSMENT RATES\*

[In basis points per annum]

[If the reserve ratio for the prior assessment period is equal to or greater than 2.5 percent]

	Risk category I	Risk category II	Risk category III	Risk category IV	Large & highly complex institutions **
Initial Base Assessment Rate .....	1–5	9	15	25	1–25
Unsecured Debt Adjustment *** .....	–2.5 to 0	–4.5 to 0	–5 to 0	–5 to 0	–5 to 0
Brokered Deposit Adjustment .....	N/A	0 to 10	0 to 10	0 to 10	0 to 10
Total Base Assessment Rate .....	0.5 to 5	4.5 to 19	10 to 25	20 to 35	0.5 to 35

\* Total base assessment rates do not include the DIDA.

\*\* See § 327.8(f) and (g) for the definition of large and highly complex institutions.

\*\*\* The unsecured debt adjustment cannot exceed the lesser of 5 basis points or 50 percent of an insured depository institution's initial base assessment rate; thus, for example, an insured depository institution with an initial base assessment rate of 1 basis point will have a maximum unsecured debt adjustment of 0.5 basis points and cannot have a total base assessment rate lower than 0.5 basis points. The unsecured debt adjustment does not apply to insured branches.

<sup>22</sup> New small banks will remain subject to the assessment schedule in Table 5 when the reserve ratio reaches 2 percent and 2.5 percent.

With respect to each of the four assessment rate schedules (Tables 3, 4, 5 and 6), the Board has the authority to adopt rates without further notice and comment rulemaking that are higher or lower than the total assessment rates (also known as the total base assessment rates) shown in the tables, provided that: (1) The Board cannot increase or decrease rates from one quarter to the next by more than two basis points; and (2) cumulative increases and decreases cannot be more than two basis points higher or lower than the total base assessment rates.<sup>23</sup>

### III. Justification for Proposal

While the current deposit insurance assessment system effectively reflects the risk posed by small banks, it can be improved by incorporating newer data from the recent financial crisis and revising the methodology to directly estimate the probability of failure three years ahead. These improvements will allow the FDIC to more effectively price risk. The proposed improvements to the small bank risk-based assessment system will further the goals of reducing cross-subsidization of high-risk institutions by low risk institutions and help ensure that banks that take on greater risks will pay more for deposit insurance.

### IV. Description of the Proposed Rule

#### *Summary of the Proposed Rule*

The FDIC proposes to improve the assessment system applicable to established small banks<sup>24</sup> (that is, small banks other than new small banks and insured branches of foreign banks) by: (1) Revising the financial ratios method so that it is based on a statistical model estimating the probability of failure over three years; (2) updating the financial measures used in the financial ratios method consistent with the statistical model; and (3) eliminating risk categories for all established small banks and using the financial ratios method to determine assessment rates for all such banks. CAMELS composite ratings, however, would be used to place a maximum on the assessment rates that CAMELS composite 1- and 2-rated banks could be charged and minimums on the assessment rates that CAMELS composite 3-, 4- and 5-rated banks could be charged.

Over 500 banks have failed since the end of 2007. These failures, together

with the hundreds of failures during the banking crisis of the late 1980s and early 1990s, have generated a robust set of data on bank failures. The FDIC need no longer rely on a model that estimates a proxy for failure—the probability that a bank with a CAMELS composite rating of 1 or 2 will be downgraded to a CAMELS composite rating of 3, 4, or 5 within 12 months; rather, the FDIC can base small bank deposit insurance assessments on a statistical model that estimates a bank's probability of failure directly.

In addition to estimating probability of failure directly, the proposal improves the small bank deposit insurance assessment system in other ways. First, it allows the assessment system to better capture risk when the risk is assumed, rather than when the risk has already resulted in losses. The statistical model on which the proposed deposit insurance assessment system for small banks is based estimates the probability of failure within three years, balancing the need to capture risk when it is assumed with the need for accurate failure predictions. (The longer the prediction period, the less accurate a model's predictions will tend to be; so, for example, the FDIC cannot create a model that predicts failure ten years in the future with sufficient accuracy.) The risk-based assessment system established in 2011 for large banks is also designed to capture performance over a period longer than one year. The FDIC would update the financial measures used in the financial ratios method to be consistent with the proposed statistical model. All of the proposed measures were statistically significant in predicting a bank's probability of failure within a three-year period.

Second, because the model allows the FDIC to estimate the probability of failure directly, it allows the FDIC to apply the model to all established small banks, not just those in Risk Category I. In part because CAMELS ratings can incorporate information that the model cannot, the FDIC proposes to apply minimum or maximum initial base assessment rates that will depend on a bank's CAMELS composite rating. Thus, as it has with large banks, the FDIC would eliminate risk categories for small banks (other than new small banks and insured branches of foreign banks).

Third, because the model predicts the probability of failure three years ahead using data on hundreds of failures (including failures during the recent crisis), it better reflects banks' actual risks and provides incentives to banks to monitor and reduce risks that

increase potential losses to the DIF. Because it measures risk more accurately, the model reduces the subsidization of riskier banks by less risky banks.

The FDIC intends to preserve the lower range of initial base assessment rates previously adopted by the Board. The FDIC is proposing that the new assessment system go into operation the quarter after the reserve ratio reaches 1.15 percent. At that time, under the initial base assessment rate schedules adopted by the Board in 2011, initial based assessment rates will fall automatically from the current 5 basis point to 35 basis point range to a 3 basis point to 30 basis point range, as reflected in Table 4.<sup>25</sup> The FDIC adopted this schedule of assessment rates pursuant to its long-term fund management plan as the FDIC's best estimate of the assessment rates that would have been needed from 1950 to 2010 to maintain a positive fund balance during the past two banking crises.

The FDIC proposes to convert the statistical model to assessment rates within this 3 basis point to 30 basis point assessment range in a revenue neutral way; that is, in a manner that does not change the aggregate assessment revenue collected from established small banks. Specifically, the conversion would be done to ensure that aggregate assessments for an assessment period shortly before adoption of a final rule would have been approximately the same under the final rule as they would have been under the assessment rate schedule set forth in Table 4 (the rates that, under current rules, will automatically go into effect when the reserve ratio reaches 1.15 percent).

To avoid unnecessary burden, the FDIC is proposing a revised small bank assessment system that does not require small banks to report any new data in their Reports of Condition and Income (Call Reports).

#### *Implementation of the Proposed Rule*

The FDIC proposes that a final rule go into effect the quarter after a final rule is adopted; by their terms, however, the proposed revisions would not become operative until the quarter after the DIF reserve ratio reaches 1.15 percent.

<sup>25</sup> As under current rules, the brokered deposit adjustment would continue to apply only to established small banks that are less than well capitalized or that have a CAMELS composite rating of 3, 4 or 5.

<sup>23</sup> See 12 CFR 327.10(f); 76 FR at 10684.

<sup>24</sup> Subject to exceptions, an established insured depository institution is one that has been federally insured for at least five years as of the last day of any quarter for which it is being assessed. 12 CFR 327.8(k).

*Detailed Description of the Proposed Rule***Risk Differentiation**

As mentioned above, the FDIC is proposing to update the financial measures used in the financial ratios method consistent with the statistical model, eliminate risk categories for all

established small banks, and use the financial ratios method to determine assessment rates for all such banks. CAMELS composite ratings would be used to place a maximum on the assessment rates that CAMELS composite 1- and 2-rated banks could be charged, and minimums on the assessment rates that CAMELS

composite 3-, 4- and 5-rated banks could be charged.

The financial ratios method as revised would use the measures described in the right-hand column of Table 7 below. For comparison's sake, the measures currently used in the financial ratios method are set out on the left-hand column of the table.

**TABLE 7—COMPARISON OF CURRENT AND PROPOSED MEASURES IN THE FINANCIAL RATIOS METHOD**

Current risk category I financial ratios method	Proposed financial ratios method
<ul style="list-style-type: none"> <li>• Weighted Average CAMELS Component Rating .....</li> <li>• Tier 1 Leverage Ratio .....</li> <li>• Net Income before Taxes/Risk-Weighted Assets .....</li> <li>• Nonperforming Assets/Gross Assets .....</li> <li>• Adjusted Brokered Deposit Ratio .....</li> <li>• Net Loan Charge-Offs/Gross Assets</li> <li>• Loans Past Due 30–89 Days/Gross Assets</li> </ul>	<ul style="list-style-type: none"> <li>• Weighted Average CAMELS Component Rating.</li> <li>• Tier 1 Leverage Ratio.</li> <li>• Net Income before Taxes/Total Assets.</li> <li>• Nonperforming Loans and Leases/Gross Assets.</li> <li>• Other Real Estate Owned/Gross Assets.</li> <li>• Core Deposits/Total Assets.</li> <li>• One Year Asset Growth.</li> <li>• Loan Mix Index.</li> </ul>

All of the proposed measures are derived from a statistical analysis that estimates a bank's probability of failure within three years. Each of the measures was statistically significant in predicting a bank's probability of failure over that period. The statistical analysis used bank financial data and CAMELS ratings from 1985 through 2011, failure data from 1986 through 2014, and loan charge-off data from 2001 through 2014.<sup>26</sup> Appendix 1 to the Supplementary Information section of this notice and the proposed Appendix E describe the statistical analysis and the derivation of these proposed measures in detail.

Two of the proposed measures—the weighted average CAMELS component rating and the tier 1 leverage ratio—are identical to the measures currently used in the financial ratios method.<sup>27</sup> The proposed net income before taxes/total assets measure is also identical to the current measure, except that the denominator is total assets rather than risk-weighted assets. The current

measure nonperforming assets/gross assets includes other real estate owned. In the proposal, other real estate owned/gross assets is a separate measure from nonperforming loans and leases/gross assets.

The remaining three proposed measures—core deposits/total assets, one-year asset growth, and the loan mix index—are new.<sup>28</sup>

Under the proposal, the core deposits/total assets and the one-year asset growth measures would replace the adjusted brokered deposit ratio currently used in the financial ratios method. The adjusted brokered deposit ratio increases a Risk Category I small bank's assessment rate only if the bank has both large amounts of brokered deposits and high asset growth.<sup>29</sup> Few banks have both, so the ratio affects few banks.<sup>30</sup> One of the proposed replacement measures—core deposits/total assets—will tend to lower assessment rates for most small banks. The other proposed replacement measure—one-year asset growth—will tend to raise assessment rates for small banks that grow significantly over a year

(other than through merger or by acquiring failed banks).

The loan mix index is a measure of the extent to which a bank's total assets include higher-risk categories of loans. Each category of loan in a bank's loan portfolio is divided by the bank's total assets to determine the percentage of the bank's assets represented by that category of loan. Each percentage is then multiplied by that category of loan's historical weighted average industry-wide charge-off rate. The products are then summed to determine the loan mix index value for that bank.

The loan categories in the loan mix index were selected based on the availability of category-specific charge-off rates over a sufficiently lengthy period (2001 through 2014) to be representative. The loan categories exclude credit card loans.<sup>31</sup> For each loan category, the weighted average charge-off rate weights each industry-wide charge-off rate for each year by the number of bank failures in that year. Thus, charge-off rates from 2009 through 2014, during the recent banking crisis, have a much greater influence on the weighted average charge-off rate than charge-off rates from the years before the crisis, when few failures occurred. The weighted averages assure that types of loans that have high

<sup>26</sup> For certain lagged variables, such as one-year asset growth rates, the statistical analysis also used bank financial data from 1984.

<sup>27</sup> Current rules provide that, if a Risk Category I small bank's CAMELS component ratings change during a quarter in a way that changes the bank's initial base assessment rate, the initial base assessment rate for the period before the change shall be determined under the financial ratios method using the CAMELS component ratings in effect before the change. Beginning on the date of the CAMELS component ratings change, the initial base assessment rate for the remainder of the quarter is determined using the CAMELS component ratings in effect after the change. 12 CFR 327.9(a)(4)(iv)(B). Under the proposal, this rule would remain essentially unchanged, but would apply to all established small banks rather than just banks within Risk Category I.

<sup>28</sup> Two measures in the current financial ratios method—net loan charge-offs/gross assets and loans past due 30–89 days/gross assets—are not used in the statistical analysis and are not among the proposed measures.

<sup>29</sup> The adjusted brokered deposit ratio can affect assessment rates only if a bank's brokered deposits (excluding reciprocal deposits) exceed 10 percent of its non-reciprocal brokered deposits and its assets have grown more than 40 percent in the previous 4 years. 12 CFR 327 Appendix A to Subpart A.

<sup>30</sup> As of December 31, 2014, the adjusted brokered deposit ratio affected the assessment rate of 81 banks.

<sup>31</sup> Credit card loans were excluded from the loan mix index because they produced anomalously high assessment rates for banks with significant credit card loans. Credit card loans have very high charge-off rates, which the loan mix index can capture, but they also tend to have very high interest rates to compensate. In addition, few small banks have significant concentrations of credit card loans. Consequently, credit card loans are omitted from the index.

charge-off rates during downturns have an appropriate influence on assessment rates.

Table 8 below illustrates how the loan mix index is calculated for a hypothetical bank.

TABLE 8—LOAN MIX INDEX FOR A HYPOTHETICAL BANK <sup>32</sup>

	Weighted charge-off rate percent	Loan category as a percent of hypothetical bank's total assets	Product of two columns to the left
Construction & Development .....	4.50	1.40	6.29
Commercial & Industrial .....	1.60	24.24	38.75
Leases .....	1.50	0.64	0.96
Other Consumer .....	1.46	14.93	21.74
Loans to Foreign Government .....	1.34	0.24	0.32
Real Estate Loans Residual .....	1.02	0.11	0.11
Multifamily Residential .....	0.88	2.42	2.14
Nonfarm Nonresidential .....	0.73	13.71	9.99
1–4 Family Residential .....	0.70	2.27	1.58
Loans to Depository banks .....	0.58	1.15	0.66
Agricultural Real Estate .....	0.24	3.43	0.82
Agriculture .....	0.24	5.91	1.44
SUM (Loan Mix Index) .....	.....	70.45	84.79

The weighted charge-off rates in the table are the same for all small banks. The remaining two columns vary from bank to bank, depending on the bank's loan portfolio. For each loan type, the value in the rightmost column is calculated by multiplying the weighted charge-off rate by the bank's loans of that type as a percent of its total assets. In this illustration, the sum of the right-hand column (84.79) is the loan mix index for this bank.

As in the current methodology for Risk Category I small banks, under the proposal the weighted CAMELS components and financial ratios would be multiplied by statistically derived pricing multipliers, the products would be summed, and the sum would be added to a uniform amount that would be: (a) Derived from the statistical analysis, (b) adjusted for assessment rates set by the FDIC, and (c) applied to all established small banks. The total would equal the bank's initial assessment rate. If, however, the resulting rate were below the minimum initial assessment rate for small banks, the bank's initial assessment rate would be the minimum initial assessment rate; if the rate were above the maximum, then the bank's initial assessment rate

would be the maximum initial rate for small banks. In addition, if the resulting rate for a small bank were below the minimum or above the maximum initial assessment rate applicable to banks with the bank's CAMELS composite rating, the bank's initial assessment rate would be the respective minimum or maximum assessment rate for a small bank with its CAMELS composite rating. This approach would allow rates to vary incrementally across a wide range of rates for all small banks (other than new small banks and insured branches). The conversion of the statistical model to pricing multipliers and uniform amount are discussed further below and in detail in the proposed Appendix E. Appendix E also discusses the derivation of the pricing multipliers and the uniform amount.

#### Adjustments to Initial Base Assessment Rates

As under current rules: (1) The DIDA would continue to apply to all banks; (2) the unsecured debt adjustment would continue to apply to all banks except new banks and insured branches; and (3) the brokered deposit adjustment would continue to apply to all small banks except those that are well capitalized and have a CAMELS

composite rating of 1 or 2.<sup>33</sup> As under current rules, if, during a quarter, a bank's supervisory rating changes from a CAMELS composite 1 or 2 rating to a CAMELS composite 3, 4 or 5 rating or vice versa, the bank would be subject to the brokered deposit adjustment for the portion of the quarter that it did not have a CAMELS composite 1 or 2 rating.<sup>34</sup>

#### Proposed Assessment Rates

As described above and as set out in the rate schedule in Table 9 below, for established small banks, the FDIC proposes to eliminate risk categories, but maintain the range of initial assessment rates (3 basis points to 30 basis points) that the Board has previously determined will go into effect starting the quarter after the reserve ratio reaches 1.15 percent and include a maximum assessment rate that would apply to CAMELS composite 1- and 2-rated banks and the minimum assessment rates that would apply to CAMELS composite 3-rated banks and CAMELS composite 4- and 5-rated banks.<sup>35</sup> Unless revised by the Board, these rates would remain in effect so long as the reserve ratio is less than 2 percent.

<sup>32</sup> As discussed above, the loan mix index uses loan charge-off data from 2001 through 2014. As discussed in greater detail below, if financial, failure and charge-off data from later years is available at the time the FDIC adopts a final rule pursuant to this proposal, the FDIC may update the statistical model, including the loan mix index, using the methodology described in Appendix E.

The table shows industry-wide weighted charge-off percentage rates, the loan category as a

percentage of total assets and the products to two decimal places. In fact, the FDIC proposes to use seven decimal places for industry-wide weighted charge-off percentage rates, and as many decimal places as permitted by the FDIC's computer systems for the loan category as a percentage of total assets and the products. The total (the loan mix index itself) would use three decimal places.

<sup>33</sup> As under current rules, however, no adjustments would apply to bridge banks or

conservatorships. These banks would continue to be charged the minimum assessment rate applicable to small banks. As under current rules, the brokered deposit adjustment would not apply to insured branches.

<sup>34</sup> If the bank were less than well capitalized, it would be subject to the brokered deposit adjustment for the whole quarter.

<sup>35</sup> See 12 CFR 327.10(b); 76 FR at 10718.

TABLE 9—INITIAL AND TOTAL BASE ASSESSMENT RATES \*

[In basis points per annum]

[Once the reserve ratio reaches 1.15 percent]<sup>36</sup>

	Established small banks			Large & highly complex institutions **
	CAMELS Composite			
	1 or 2	3	4.or 5	
Initial Base Assessment Rate .....	3 to 16	6 to 30	16 to 30	3 to 30
Unsecured Debt Adjustment *** .....	– 5 to 0	– 5 to 0	– 5 to 0	– 5 to 0
Brokered Deposit Adjustment .....	0 to10 ****	0 to10	0 to10	0 to 10
Total Base Assessment Rate .....	1.5 to 26	3 to 40	11 to 40	1.5 to 40

\* Total base assessment rates in the table do not include the DIDA.

\*\* See § 327.8(f) and (g) for the definition of large and highly complex institutions.

\*\*\* The unsecured debt adjustment cannot exceed the lesser of 5 basis points or 50 percent of an insured depository institution's initial base assessment rate; thus, for example, an insured depository institution with an initial base assessment rate of 3 basis points will have a maximum unsecured debt adjustment of 1.5 basis points and cannot have a total base assessment rate lower than 1.5 basis points.

\*\*\*\* The brokered deposit adjustment applies to established small banks with CAMELS composite ratings of 1 or 2 only if they are less than well capitalized.

As discussed above, the FDIC adopted the range of assessment rates in this rate schedule pursuant to its long-term fund management plan as the FDIC's best estimate of the assessment rates that would have been needed from 1950 to 2010 to maintain a positive fund balance during the past two banking crises. This assessment rate schedule remains the FDIC's best estimate of the long-term rates needed. Consequently, and as discussed in greater detail further

below and in detail in Appendix E, the FDIC proposes to convert its statistical model to assessment rates within this 3 basis point to 30 basis point assessment range in a revenue neutral way.

The FDIC proposes to maintain the range of initial assessment rates, set out in the rate schedule in Table 10 below, that the Board has previously determined will go into effect starting the quarter after the reserve ratio reaches or exceeds 2 percent and is less

than 2.5 percent. Unless revised by the Board, these rates would remain in effect so long as the reserve ratio is in this range. Table 10 also includes the maximum assessment rates that will apply to CAMELS composite 1- and 2-rated banks and the minimum assessment rates that will apply to CAMELS composite 3-rated banks and CAMELS composite 4- and 5-rated banks.

TABLE 10—INITIAL AND TOTAL BASE ASSESSMENT RATES \*

[In basis points per annum]

[If the reserve ratio for the prior assessment period is equal to or greater than 2 percent and less than 2.5 percent]

	Established small banks			Large & highly complex institutions **
	CAMELS Composite			
	1 or 2	3	4 or 5	
Initial Base Assessment Rate .....	2 to 14	5 to 28	14 to 28	2 to 28
Unsecured Debt Adjustment *** .....	– 5 to 0	– 5 to 0	– 5 to 0	– 5 to 0
Brokered Deposit Adjustment .....	0 to 10 ****	0 to 10	0 to 10	0 to 10
Total Base Assessment Rate .....	1 to 24	2.5 to 38	9 to 38	1 to 38

\* Total base assessment rates in the table do not include the DIDA.

\*\* See § 327.8(f) and (g) for the definition of large and highly complex institutions.

\*\*\* The unsecured debt adjustment cannot exceed the lesser of 5 basis points or 50 percent of an insured depository institution's initial base assessment rate; thus, for example, an insured depository institution with an initial base assessment rate of 2 basis points will have a maximum unsecured debt adjustment of 1 basis point and cannot have a total base assessment rate lower than 1 basis point.

\*\*\*\* The brokered deposit adjustment applies to established small banks with CAMELS composite ratings of 1 or 2 only if they are less than well capitalized.

The FDIC proposes to maintain the range of initial assessment rates, set out in the rate schedule in Table 11 below, that the Board has previously determined will go into effect, again without further action by the Board, when the fund reserve ratio at the end

of the prior assessment period meets or exceeds 2.5 percent. Unless changed by the Board, these rates would remain in effect so long as the reserve ratio is at or above this level. Table 11 also includes the maximum assessment rates that will apply to CAMELS composite 1-

and 2-rated banks and the minimum assessment rates that will apply to CAMELS composite 3-rated banks and CAMELS composite 4- and 5-rated banks.

<sup>36</sup> The reserve ratio for the immediately prior assessment period must also be less than 2 percent.

TABLE 11—INITIAL AND TOTAL BASE ASSESSMENT RATES \*

[In basis points per annum]

[If the reserve ratio for the prior assessment period is equal to or greater than 2.5 percent]

	Established small banks			Large & highly complex institutions **
	CAMELS Composite			
	1 or 2	3	4 or 5	
Initial Base Assessment Rate .....	1 to 13 .....	4 to 25 .....	13 to 25 .....	1 to 25 .....
Unsecured Debt Adjustment *** .....	– 5 to 0 .....	– 5 to 0 .....	– 5 to 0 .....	– 5 to 0 .....
Brokered Deposit Adjustment .....	0 to 10 **** .....	0 to 10 .....	0 to 10 .....	0 to 10 .....
Total Base Assessment Rate .....	0.5 to 23 .....	2 to 35 .....	8 to 35 .....	0.5 to 35 .....

\* Total base assessment rates in the table do not include the DIDA.

\*\* See § 327.8(f) and (g) for the definition of large and highly complex institutions.

\*\*\* The unsecured debt adjustment cannot exceed the lesser of 5 basis points or 50 percent of an insured depository institution's initial base assessment rate; thus, for example, an insured depository institution with an initial base assessment rate of 1 basis point will have a maximum unsecured debt adjustment of 0.5 basis points and cannot have a total base assessment rate lower than 0.5 basis points.

\*\*\*\* The brokered deposit adjustment applies to established small banks with CAMELS composite ratings of 1 or 2 only if they are less than well capitalized.

With respect to each of the three assessment rate schedules (Tables 9, 10 and 11), the FDIC proposes that the Board would retain its authority to uniformly adjust assessment rates up or down from the total base assessment rate schedule without further rulemaking, as long as adjustment does not exceed 2 basis points. Also, with respect to each of the three schedules, the FDIC proposes that, if a bank's CAMELS composite or component ratings change during a quarter in a way that changes the institution's initial base assessment rate, then its assessment rate would be determined separately for each portion of the quarter in which it had different CAMELS composite or component ratings.

#### Conversion of Statistical Model to Pricing Multipliers and Uniform Amount

As discussed above, the FDIC proposes to convert its statistical model to assessment rates set out in Table 9 in a revenue neutral manner.<sup>37</sup> Specifically, and as described in detail in Appendix E, the FDIC proposes to convert the statistical model to assessment rates to ensure that aggregate assessments for an assessment period shortly before adoption of a final rule would have been approximately the same under the final rule as they would have been under the assessment rate schedule set forth in Table 4 (the rates

that, under current rules, will automatically go into effect when the reserve ratio reaches 1.15 percent).

To illustrate the conversion, Table 12 below sets out the pricing multipliers and uniform amounts that would have resulted if the FDIC had converted the statistical model to the assessment rate schedule set out in Table 9 (with a range of assessment rates from 3 basis points to 30 basis points) so that, for the fourth quarter of 2014, aggregate assessments for all established small banks under the proposal would have equaled, as closely as reasonably possible, aggregate assessments for all established small banks had the assessment rate schedule in Table 4 been in effect for that assessment period.<sup>38</sup> Partly because the actual conversion will be based upon a later quarter (and partly for the reasons discussed directly below), the pricing multipliers and the uniform amount shown in Table 12 are likely to differ somewhat from those in the final rule.

TABLE 12—PRICING MULTIPLIERS AND THE UNIFORM AMOUNT UNDER A HYPOTHETICAL CONVERSION OF THE STATISTICAL MODEL TO ASSESSMENT RATES BASED ON THE FOURTH QUARTER OF 2014

Model measures	Pricing multiplier
Weighted Average CAMELS Component Rating .....	1.731
Tier 1 Leverage Ratio .....	– 1.337
Net Income Before Taxes/Total Assets .....	– 0.652
Nonperforming Loans and Leases/Gross Assets .....	0.924

<sup>38</sup> Initial assessment rates under the rate schedule actually in effect for the fourth quarter of 2014 ranged from 5 basis points to 35 basis points, since the DIF reserve ratio was under 1.15 percent.

TABLE 12—PRICING MULTIPLIERS AND THE UNIFORM AMOUNT UNDER A HYPOTHETICAL CONVERSION OF THE STATISTICAL MODEL TO ASSESSMENT RATES BASED ON THE FOURTH QUARTER OF 2014—Continued

Model measures	Pricing multiplier
Other Real Estate Owned/ Gross Assets .....	0.620
Core Deposits/Total Assets ..	– 0.139
One Year Asset Growth .....	0.043
Loan Mix Index .....	0.066
Uniform Amount .....	19.376

#### Updating the Statistical Model, Pricing Multipliers and Uniform Amount

The statistical analysis used bank financial data and CAMELS ratings from 1985 through 2011, failure data from 1986 through 2014 and loan charge-off data from 2001 through 2014. The FDIC proposes to retain the flexibility to update the statistical model from time to time using financial, failure and charge-off data from later years and publish a new loan mix index, uniform amount and pricing multipliers based on the updated model without further notice-and-comment rulemaking. Any update to the model would be done pursuant to the methodology described in Appendix E. No new financial ratios or other measures would be introduced into the model without notice-and-comment rulemaking. Because the analysis would continue to use earlier years' data as well, changes in estimations of failure probability should usually be relatively small. Similarly, if financial, failure and charge-off data from later years is available at the time the FDIC adopts a final rule pursuant to this proposal, the FDIC may update the statistical model,

<sup>37</sup> The FDIC proposes to convert a linear version of its model, which was estimated in a non-linear manner. (See Appendix E.) The conversion using a linear version of the model preserves the same rank ordering as the non-linear model, but using the linear version of the model allows initial assessment rates to be expressed as a linear function of the model variables. The FDIC also used a linear version of its original non-linear downgrade probability statistical model when it instituted variable rates within Risk Category 1 (effective January 1, 2007).

including the loan mix index, using the methodology described in Appendix E.

#### *Insured Branches of Foreign Banks and New Small Banks*

The FDIC proposes to make no changes to the rules governing the assessment rate schedules applicable to insured branches or to the assessment rate schedule applicable to new small banks. The FDIC also proposes to make no changes to the way in which assessment rates for insured branches and new small banks are determined.

#### *Insured Branches*

The current risk-based deposit insurance assessment system for small banks assigns insured branches an assessment risk classification that is based on the FDIC's consideration of supervisory evaluations provided by the institution's primary federal regulator.<sup>39</sup> Within Risk Category I, each insured branch's assessment rate is based on these supervisory evaluations.<sup>40</sup> Insured branches not in Risk Category I are charged the initial base assessment rate

for the risk category to which they are assigned.<sup>41</sup> Once the DIF reserve ratio reaches 1.15 percent, 2 percent, and 2.5 percent, assessment rate schedules previously adopted by the Board will go into effect and remain in place for insured branches.

The FDIC does not propose changing the way assessment rates applicable to insured branches are determined.<sup>42</sup> Insured branches do not report the information that the FDIC would need to apply the financial ratios method to them.<sup>43</sup> Moreover, because insured branches operate as extensions of a foreign bank's global banking operations, they pose unique risks, which the financial ratios method may not be able to capture. An insured branch operates without capital of its own (capital is held by the foreign bank), its business strategies are typically directed by the foreign bank, it relies extensively on the foreign bank for liquidity and funding, and it often has considerable country and transfer risk exposures not typically found in

other insured institutions of similar size. Insured branches also present potentially challenging concerns in the event of failure.

#### *New Small Banks*

New small banks are currently assigned to risk categories in the same manner as all other small banks. All new small banks in Risk Category I, however, are charged the maximum rate applicable to Risk Category I. New small banks not in Risk Category I are charged the initial base assessment rate for the risk category to which they are assigned.<sup>44</sup> Once the DIF reserve ratio reaches 1.15 percent, new small banks will be charged initial rates under the previously adopted rate schedule that automatically goes into effect then. This rate schedule will remain in place even if the reserve ratio equals or exceeds 2 percent or 2.5 percent.<sup>45</sup> After applying all possible adjustments, minimum and maximum total assessment rates for new small banks in each risk category are set forth in Table 13 below.

**TABLE 13—TOTAL BASE ASSESSMENT RATES, NEW SMALL BANKS \***

[In basis points per annum]

	Risk category I	Risk category II	Risk category III	Risk category IV
Initial Assessment Rate .....	7	12	19	30
Brokered Deposit Adjustment (added) .....	N/A	0 to 10	0 to 10	0 to 10
Total Assessment Rate .....	7	12 to 22	19 to 29	30 to 40

\* The unsecured debt adjustment does not apply to new banks. Total assessment rates do not include the DIDA.

The FDIC does not propose changing the way assessment rates applicable to new small banks are determined.<sup>46</sup> The financial data on which the financial ratios method is based tends to be

harder to interpret and less meaningful for new small banks. A new bank undergoes rapid changes in the scale and scope of operations, often causing financial ratios to be fairly volatile. In

addition, a new bank's loan portfolio is often unseasoned, and therefore it is difficult to assess credit risk based solely on current financial ratios.<sup>47</sup>

<sup>39</sup> These supervisory evaluations result in the assignment of supervisory ratings referred to as ROCA ratings. ROCA stands for Risk Management, Operational Controls, Compliance, and Asset Quality. Like CAMELS components, ROCA component ratings range from a "1" (best rating) to a "5" rating (worst rating). A Risk Category I insured branch generally has a ROCA composite rating of 1 or 2.

<sup>40</sup> Specifically, the assessment rate depends on the insured branch's weighted average ROCA component ratings. The weights applied to individual ROCA component ratings are 35 percent, 25 percent, 25 percent, and 15 percent, respectively.

<sup>41</sup> No insured branch in any risk category is subject to the unsecured debt adjustment or brokered deposit adjustment. Insured branches are subject to the DIDA.

<sup>42</sup> As of March 31, 2015, there were only 9 insured branches that file regulatory financial submissions (FFIEC Form 002). (One of these branches, however, files for itself and another branch of the same foreign bank that does not file separately.)

<sup>43</sup> For example, insured branches of foreign banks do not report earnings and report only limited balance sheet information in FFIEC Form 002.

<sup>44</sup> New small banks are subject to the DIDA. New small banks in Risk Categories II, III, and IV are subject to the brokered deposit adjustment. New small banks are not subject to the unsecured debt adjustment.

<sup>45</sup> As with other assessment rates, the Board has the ability to adopt actual rates that are higher or lower than these total assessment rates without the necessity of further notice and comment rulemaking, provided that: (1) The Board cannot increase or decrease rates from one quarter to the next by more than two basis points; and (2) cumulative increases and decreases cannot be more than two basis points higher or lower than the total base rates.

<sup>46</sup> Current rules provide that: (1) under specified conditions, certain subsidiary small banks will be considered established rather than new, 12 CFR 327.8(k)(4); and (2) the time that a bank has spent as a federally insured credit union is included in determining whether a bank is established, 12 CFR 327.8(k)(5). If a Risk Category I small bank is considered established under these rules, but has no CAMELS component ratings, its initial assessment rate is 2 basis points above the minimum initial assessment rate applicable to Risk Category I (which is equivalent to 2 basis points above the minimum initial assessment rate for

established small banks) until it receives CAMELS component ratings. Thereafter, the assessment rate is determined by annualizing, where appropriate, financial ratios obtained from all quarterly Call Reports that have been filed, until the bank files four quarterly Call Reports. For small banks that are considered established under these rules, but do not have CAMELS component ratings, the FDIC proposes the following:

1. If the bank has no CAMELS composite rating, its initial assessment rate would be 2 basis points above the minimum initial assessment rate for established small banks until it receives a CAMELS composite rating; and

2. If the bank has a CAMELS composite rating but no CAMELS component ratings, its initial assessment rate would be determined using the financial ratios method by substituting its CAMELS composite rating for its weighted average CAMELS component rating and, if the bank has not yet filed four quarterly Call Reports, by annualizing, where appropriate, financial ratios obtained from all quarterly Call Reports that have been filed.

<sup>47</sup> Empirical studies show that new banks exhibit a "life cycle" pattern, and it takes close to a decade after its establishment for a new bank to mature.

Continued

Further, on average, new banks have a higher failure rate than established institutions.

## V. Expected Effects of the Proposed Rule

### *Effect on Assessment Rates*

To illustrate the effects of the proposal on small bank assessment rates, the FDIC compared actual assessment rates of established small banks as of the end of 2014, using a range of initial assessment rates of 5 basis points to 35 basis points with hypothetical assessment rates under

Despite low profitability and rapid growth, banks that are three years or newer have, on average, a probability of failure lower than established banks, perhaps owing to large capital cushions and close supervisory attention. However, after three years, new banks' failure probability, on average, surpasses that of established banks. New banks typically grow more rapidly than established banks and tend to engage in more high-risk lending activities funded by large deposits. Studies based on data from the 1980s showed that asset quality deteriorated rapidly for many new banks as a result, and failure probability (conditional upon survival in prior years) reached a peak by the ninth year. Many financial ratios of new banks generally begin to resemble those of established banks by about the seventh or eighth year of their operation. See Chiwon Yom, "Recently Chartered Banks' Vulnerability to Real Estate Crisis," FDIC Banking Review 17 (2005): 115 and Robert DeYoung, "For How Long Are Newly Chartered Banks Financially Fragile?" Federal Reserve Bank of Chicago Working Paper Series 2000-09.

Table 9 of the proposal (which has an overall range of assessment rates of 3 basis points to 30 basis points).<sup>48</sup> The proportion (and number) of established small banks paying the minimum initial assessment rate would have increased significantly, from 23.3 percent in actuality (1,493 small banks) to 56.0 percent under the proposal (3,584 small banks). The proportion (and number) of established small banks paying the maximum assessment rate would have decreased from 0.7 percent of established small banks in actuality (43 small banks) to 0.1 percent of established small banks under the proposal (7 small banks). Most established small banks (5,922 or 92.5 percent) would have had rate decreases. On average, Risk Category I established

<sup>48</sup> The proposal assumes a range of initial assessment rates from 3 basis points to 30 basis points. For purposes of determining assessment rates for the illustration, the FDIC converted the statistical model to a range of assessment rates from 3 basis points to 30 basis points so that, for the fourth quarter of 2014, aggregate assessments for all established small banks under the proposal would have equaled, as closely as reasonably possible, aggregate assessments for all established small banks under the rate schedule in Table 4 (the rates that, under current rules, will automatically go into effect when the reserve ratio reaches 1.15 percent). Initial assessment rates under the rate schedule actually in effect for the fourth quarter of 2014 ranged from 5 basis points to 35 basis points, since the DIF reserve ratio was under 1.15 percent.


small banks would have had a rate decrease of 2.4 basis points, and Risk Category II, III, and IV established small banks would have had a rate decrease of 6.5 basis points. Of the Risk Category II, III, and IV established small banks, 96.3 percent would have had rate decreases; the average decrease would have been 6.8 basis points. 481 established small banks (7.5 percent of established small banks) would have had rate increases. Of the Risk Category I established small banks, 8.0 percent would have had rate increases; the average increase would have been 1.6 basis points.

Chart 1 below graphically compares the distribution of established small bank initial assessment rates under this illustration. The horizontal axis in the chart represents established small banks ranked by risk, from the least risky on the left to the most risky on the right. Because actual risk rankings under the current small bank deposit insurance assessment system differ from risk rankings under the proposal, a particular point on the horizontal axis is not likely to represent the same bank for the current system and the proposal. Thus, the chart does not show how an individual bank's assessment would change under the proposal; it simply compares the distribution of assessment rates under the current system to the distribution under the proposal.



## Chart 1 – Illustrative, Hypothetical Comparison of Distribution of Assessment Rates

For Established Small Banks (Comparing Actual Fourth Quarter of 2014 Initial Assessment Rates for the Current System to the Proposal)

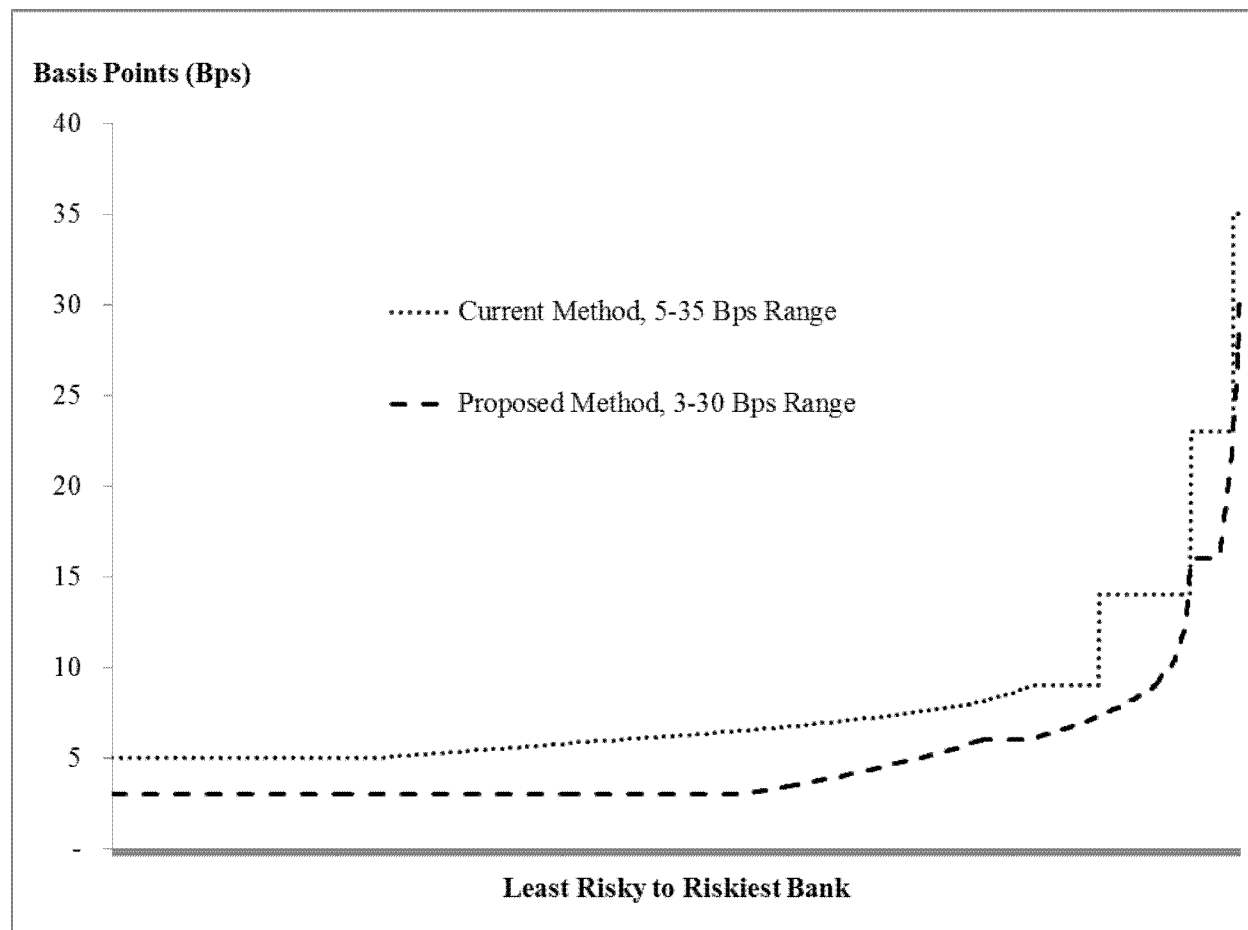

To further illustrate the effects of the proposal on small bank assessment rates, the FDIC compared hypothetical assessment rates under the proposal with the assessment rates established small banks would have been charged as of the end of 2014 if the assessment rate schedule that, under current rules, will go into effect when the reserve ratio reaches 1.15 percent had been in effect. The proportion of established small banks paying the minimum initial assessment rate would also have increased from 23.3 percent in actuality to 56.0 percent under the proposal and

the proportion of established small banks paying the maximum assessment rate would also have decreased from 0.7 percent of established small banks in actuality to 0.1 percent of established small banks under the proposal. Most established small banks (3,814 or 59.5 percent) would have had rate decreases. On average, Risk Category I established small banks would have had a rate decrease of 0.4 basis points, and Risk Category II, III, and IV established small banks would have had a rate decrease of 3.7 basis points. Of the Risk Category II, III, and IV established small banks, 90.9

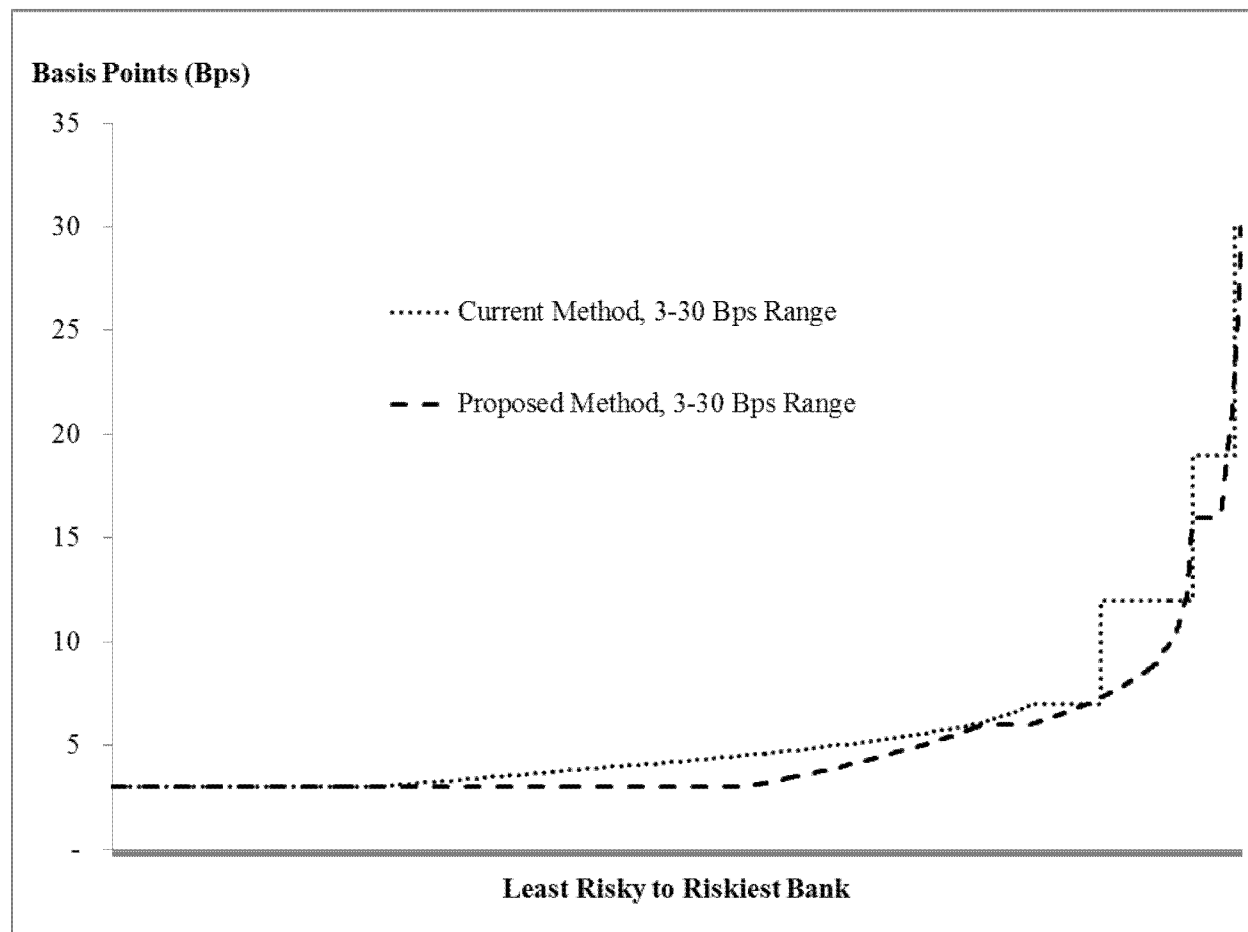
percent would have had rate decreases; the average decrease would have been 4.4 basis points. 1,268 established small banks (19.8 percent of established small banks) would have had rate increases. Of the Risk Category I established small banks, 21.4 percent would have had rate increases; the average increase would have been 1.9 basis points.

Chart 2 below graphically compares the distribution of established small bank initial assessment rates under this illustration.

## Chart 2 – Illustrative, Hypothetical Comparison of Distribution of Assessment Rates

For Established Small Banks Based on the Fourth Quarter of 2014

(Comparing Table 4 Initial Assessment Rates for the Current System to the Proposal)

*Effect on Capital and Earnings*

Appendix 2 to the Supplementary Information section of this notice discusses the effect of the proposal on the capital and earnings of small established banks in detail. Annualizing fourth quarter 2014 balance sheet data, Appendix 2 analyzes the effects of the proposal on capital and income in two ways: (1) The effect of the proposal compared to the current small bank deposit insurance assessment system under the rate schedule in Table 3 (with an initial assessment rate range of 5 basis points to 35 basis points) (the first comparison); and (2) the effect of the proposal compared to the current small bank deposit insurance assessment system under the rate schedule in Table 4 (with an initial assessment rate range of 3 basis points to 30 basis points; this rate schedule is to go into effect the quarter after the DIF reserve ratio

reaches 1.15 percent) (the second comparison).

Under either comparison, the proposal would cause no small banks to fall below a 4 percent or 2 percent leverage ratio that would otherwise be above these thresholds. Similarly, the proposal would cause no small banks to rise above a 2 percent leverage ratio that would otherwise be below this threshold. Two established small banks facing a decrease in assessments under the first comparison and one established small bank facing a decrease in assessments under the second comparison would, as a result of the proposal, have their leverage ratios rise above 4 percent, when they would have been below 4 percent otherwise.

In the first comparison, only approximately 7 percent of profitable established small banks and approximately 6 percent of unprofitable

small banks would face a rate increase; all but a very few (26) banks would have resulting declines in income (or increases in losses, where the bank is unprofitable) of 5 percent or less. As discussed above, assessment rates for approximately 92 percent of established small banks would decline, resulting in increases in income (or decreases in losses), some of which would be substantial.

In the second comparison, approximately 20 percent of profitable established small banks and approximately 14 percent of unprofitable established small banks would face a rate increase; all but 111 established small banks would have resulting declines in income (or increases in losses, where the bank is unprofitable) of 5 percent or less. As discussed above, assessment rates for approximately 60 percent of established

small banks would decline, resulting in increases in income (or decreases in losses), some of which would be substantial.

In sum, because the proposed revisions are intended to generate the same total revenue from small banks as would have been generated absent the proposal, the revisions should, overall, have no effect on the capital and earnings of the banking industry, although the revisions will affect the earnings and capital of individual institutions.

## VI. Backtesting

To evaluate the proposed revisions to the risk-based deposit insurance assessment system for small banks, the FDIC tested how well the revised system would have differentiated between banks that failed and those that did not during the recent crisis compared to the current small bank deposit insurance assessment system.

Table 14 compares accuracy ratios for the proposed system and the current small bank deposit insurance assessment system. An accuracy ratio compares how well each approach

would have discriminated between banks that failed within the projection period and those that did not. The projection period in each case is the three years following the date of the projection (the first column), which is the last day of the year given. Thus, for example, the accuracy ratios for 2006 reflect how well each approach would have discriminated in its projection between banks that failed and those that did not from 2007 through 2009.<sup>49</sup> A “perfect” projection would receive an accuracy ratio of 1; a random projection would receive an accuracy ratio of 0.<sup>50</sup>

TABLE 14—ACCURACY RATIO COMPARISON BETWEEN THE PROPOSAL AND THE CURRENT SMALL BANK DEPOSIT INSURANCE ASSESSMENT SYSTEM

Year of projection	Accuracy ratio for the proposal *	Accuracy ratio for the current small bank assessment system	Accuracy ratio for the proposal—accuracy ratio for the current system
	(A)	(B)	(A–B)
2006 .....	0.7029	0.3491	0.3539
2007 .....	0.7779	0.5616	0.2163
2008 .....	0.8930	0.7825	0.1105
2009 .....	0.9398	0.9015	0.0383
2010 .....	0.9657	0.9394	0.0262
2011 .....	0.9485	0.9323	0.0161

\* The accuracy ratio for the proposal is based on the conversion of the statistical model as estimated through 2014.

The table reveals that, while the current system did relatively well at capturing risk and predicting failures in more recent years, the proposed system would have not only done significantly better immediately before the recent crisis and at the beginning of the crisis, but also better overall.<sup>51</sup> In the early part of the crisis, when CAMELS ratings had not fully reflected the worsening condition of many banks, the proposed system would have recognized risk far better than the current system, primarily because the rates under the proposed system are not constrained by risk categories. As the crisis progressed and CAMELS ratings more fully reflected

crisis conditions, the superiority of the proposed system decreased, but it still performed better than the current system.

Appendix 1 to the Supplementary Information section of this notice contains a more detailed description of the FDIC’s backtests of the proposal.

## VII. Alternatives Considered

### *Alternative Minimum and Maximum Assessment Rates Based on CAMELS Composite Ratings*

The FDIC considered imposing no minimum or maximum initial assessment rates based on a bank’s CAMELS composite rating, which

would have allowed initial assessment rates to vary between the minimum and maximum initial assessment rates of the entire rate schedule without regard to a bank’s CAMELS composite rating (the unbounded variation). Thus, for example, under the 3 basis point to 30 basis point initial assessment range, a CAMELS composite 5 rated bank could, in principle, have paid a 3 basis point initial rate and a CAMELS composite 1 rated bank could, in principle, have paid a 30 basis point initial rate. As Table 15 shows, the accuracy ratios for this unbounded variation would have been similar to the accuracy ratios for the proposal.

<sup>49</sup> The current small bank deposit insurance assessment system did not exist at the end of 2006 and existed in somewhat different forms in years before 2011. The comparison assumes that the small bank deposit insurance assessment system in its current form existed in each year of the comparison.

<sup>50</sup> A “perfect” projection is defined as one where the projection rates every bank that fails over the projection period as more risky than every bank that does not fail. A random projection is one where the projection does no better than chance; that is, any given percentage of banks with projected higher risk will include the same percentage of banks that fail

over the projection period. Thus, for example, in a random projection, the 10 percent of banks that receive the highest risk projections will include 10 percent of the banks that fail over the projection period; the 20 percent of banks that receive the highest risk projections will include 20 percent of the banks that fail over the projection period, and so on.

<sup>51</sup> As implied in the footnote to Table 14, the accuracy ratios in the table for the proposed system are based on in-sample backtesting. In-sample backtesting compares model forecasts to actual outcomes where those outcomes are included in the

data used in model development. Out-of-sample backtesting is the comparison of model predictions against outcomes where those outcomes are not used as part of the model development used to generate predictions. Out-of-sample backtesting, discussed in Appendix 1 of the Supplementary Information section of this notice, also shows that, while the current assessment system for small banks did relatively well at predicting failures in more recent years, the proposed system would have done significantly better immediately before the recent crisis and at the beginning of the crisis, but also better overall.

TABLE 15—ACCURACY RATIO COMPARISON BETWEEN THE PROPOSAL AND THE UNBOUNDED VARIATION

Year of projection	Accuracy ratio for the unbounded variation	Accuracy ratio for the proposal *	Accuracy ratio for the unbounded variation—accuracy ratio for the proposal (A–B)
	(A)	(B)	
2006 .....	0.6959	0.7029	– 0.0070
2007 .....	0.7779	0.7779	0.0001
2008 .....	0.9121	0.8930	0.0191
2009 .....	0.9407	0.9398	0.0010
2010 .....	0.9670	0.9657	0.0013
2011 .....	0.9514	0.9485	0.0029

\* The accuracy ratios for the variation and for the proposal are based on the conversion of the statistical model as estimated through 2014.

The FDIC decided not to propose the unbounded variation, however. Other than taking into account weighted average CAMELS component ratings, the statistical model uses historical financial data to estimate average relationships between financial measures and the risk of failure. The statistical model does not take into account idiosyncratic or unquantifiable risk or risk mitigators (e.g., entering or exiting a risky line of lending; having inexperienced or experienced management, reducing or tightening underwriting requirements), again except through weighted average CAMELS component ratings. The model does take into account weighted average CAMELS component ratings, but it assigns the same weight to them for each bank. Thus, for banks that have significant idiosyncratic or unquantifiable risk or risk mitigators, the model may not assign an assessment rate that reflects their actual risk. The proposal, however, ensures that the assessment system takes idiosyncratic and unquantifiable risks and risk mitigators into account to the extent that they are reflected in CAMELS composite ratings, and prevents the assessment system from assigning a rate that reflects either too little risk (for a bank with a CAMELS composite 3, 4 or 5 rating) or too much risk (for a bank with a CAMELS composite 1 or 2 rating). As a result, under the proposal, initial assessment rates for small banks that are well rated (those with CAMELS composite ratings of 1 or 2) would not overlap with initial assessment rates for

troubled small banks (those with CAMELS composite ratings of 4 or 5), except at the maximum initial rate for CAMELS composite 1- and 2-rated banks and the minimum initial rate for CAMELS composite 4- and 5-rated banks.

In seeking the proper balance between maintaining the accuracy of the assessment system overall and reducing the risk that a particular bank's assessment rate might be inappropriate, the FDIC considered many other variations of minimum and maximum initial assessment rates based on a bank's CAMELS composite rating. Some variations with lower (or no) minimums for CAMELS 3- and/or CAMELS 4- and 5-rated banks and/or higher (or no) maximums for CAMELS 1- and/or CAMELS 2-rated banks had slightly higher accuracy ratios, but would have increased the risk of inappropriate assessment rates for some banks. Some variations with higher minimums for CAMELS 3- and/or CAMELS 4- and 5-rated banks and/or lower maximums for CAMELS 1- and/or CAMELS 2-rated banks had somewhat lower (or significantly lower) accuracy ratios. The maximums and minimums in the proposal represent the FDIC's best judgment on the proper balance. The FDIC is requesting comment on whether the proposal achieves the proper balance and whether the final rule should, instead, use alternative (or no) maximums and minimums based on CAMELS composite ratings. Because the FDIC intends that the effect of the proposal be revenue neutral, any

reduction in the maximum initial assessment rate applicable to CAMELS composite 1- or CAMELS 2-rated banks that lowers some banks' assessment rates will increase the assessment rates of other banks.<sup>52</sup>

The FDIC is particularly interested in comment on two alternatives to the proposal, both of which would distinguish between CAMELS composite 1- and 2-rated small banks. The first alternative would maintain the assessment rate schedule that would go into effect starting the quarter after the reserve ratio reaches 1.15 percent (with a range of initial assessment rates of 3 basis points to 30 basis points) and include the same maximum and minimum assessment rates based upon banks' CAMELS composite ratings (see Table 9), except that it would lower the maximum initial assessment rate for a CAMELS composite 1-rated bank from 16 basis points to 12 basis points.<sup>53</sup> As reflected in Table 16 below, compared to the proposal, this alternative would have virtually no effect on accuracy (that is, on how well the assessment system would have differentiated between banks that failed and those that did not during the recent crisis); the alternative, like the proposal, is also significantly more accurate than the current small bank deposit insurance assessment system. On the other hand, the FDIC has never before distinguished between CAMELS composite 1-rated banks and CAMELS composite 2-rated banks for deposit insurance assessment purposes.

<sup>52</sup> To be revenue neutral, using different maximums or minimums will lead to different uniform amounts and pricing multipliers from the proposal when the new statistical model is converted to assessment rates.

<sup>53</sup> Similarly, the first alternative would maintain the proposed assessment rate schedule that would go into effect the quarter after the reserve ratio

reaches or exceeds 2 percent, but is less than 2.5 percent, and include the same maximum and minimum assessment rates determined by CAMELS composite ratings (see Table 10), except that it would lower the maximum initial assessment rate for a CAMELS composite 1 rated bank from 14 basis points to 10 basis points. Also, the first alternative would maintain the proposed assessment rate

schedule that would go into effect the quarter after the reserve ratio reaches or exceeds 2.5 percent, and include the same maximum and minimum assessment rates determined by CAMELS composite ratings (see Table 11), except that it would lower the maximum initial assessment rate for a CAMELS composite 1 rated bank from 13 basis points to 9 basis points.

TABLE 16—ACCURACY RATIO COMPARISON BETWEEN THE FIRST ALTERNATIVE, THE PROPOSAL AND THE CURRENT SMALL BANK DEPOSIT INSURANCE ASSESSMENT SYSTEM

Year of projection	Accuracy ratio for the alternative *	Accuracy ratio for the proposal *	Accuracy ratio for the alternative—accuracy ratio for the proposal (A–B)	Accuracy ratio for the current small bank assessment system	Accuracy ratio for the alternative—accuracy ratio for the current system (A–C)
	(A)	(B)		(C)	
2006 .....	0.7045	0.7029	0.0016	0.3491	0.3555
2007 .....	0.7770	0.7779	–0.0009	0.5616	0.2154
2008 .....	0.8895	0.8930	–0.0035	0.7825	0.1070
2009 .....	0.9398	0.9398	0.0000	0.9015	0.0383
2010 .....	0.9657	0.9657	0.0000	0.9394	0.0262
2011 .....	0.9485	0.9485	0.0000	0.9323	0.0161

\* The accuracy ratios for the alternative and for the proposal are based on the conversion of the statistical model as estimated through 2014.

The second alternative is the same as the first, except that, for the rate schedule that would go into effect the quarter after the reserve ratio reaches 1.15 percent, the minimum initial

assessment rate applicable to CAMELS composite 4- and 5-rated banks would be lowered from 16 basis points to 12 basis points.<sup>54</sup> As reflected in Table 17 below, compared to the proposal, this

alternative would also have little effect on accuracy and, like the proposal, is significantly more accurate than the current small bank deposit insurance assessment system.

TABLE 17—ACCURACY RATIO COMPARISON BETWEEN THE SECOND ALTERNATIVE, THE PROPOSAL AND THE CURRENT SMALL BANK DEPOSIT INSURANCE ASSESSMENT SYSTEM

Year of projection	Accuracy ratio for the alternative *	Accuracy ratio for the proposal *	Accuracy ratio for the alternative—accuracy ratio for the proposal (A–B)	Accuracy ratio for the current small bank assessment system	Accuracy ratio for the alternative—accuracy ratio for the current system (A–C)
2006 .....	0.7061	0.7029	0.0032	0.3491	0.3570
2007 .....	0.7779	0.7779	0.0000	0.5616	0.2163
2008 .....	0.8903	0.8930	–0.0027	0.7825	0.1078
2009 .....	0.9407	0.9398	0.0009	0.9015	0.0392
2010 .....	0.9671	0.9657	0.0014	0.9394	0.0276
2011 .....	0.9504	0.9485	0.0019	0.9323	0.0180

\* The accuracy ratios for the alternative and for the proposal are based on the conversion of the statistical model as estimated through 2014.

In addition to the numerous variations on minimum and maximum initial assessment rates based on CAMELS composite ratings, the FDIC also considered other alternatives when developing this proposal.

#### Loss Given Default

Though expected losses to the DIF are a function of both the probability of a failure (or probability of default (PD)) and the loss given failure (or loss given default (LGD)), the new statistical model estimates only the PD. As discussed in Appendix 1 to the Supplementary Information section of this notice, the FDIC did not model LGD. Actual losses for many failed banks during the recent

crisis are still estimated, primarily because of the use of loss-sharing agreements that have not yet terminated. Until the losses are actually realized, estimating an LGD model using current data would be circular, as other FDIC models are used to estimate expected losses where losses have not yet been realized. Relying solely on realized losses would exclude much of the failure data from the recent crisis, leaving mainly failure data from the banking crisis of the late 1980s and early 1990s. However, the vast majority of the bank failures in that crisis occurred in a different regulatory regime (prior to the Federal Deposit Insurance Corporation Improvement Act of 1991)

and may, therefore, not reflect expected LGD in the current environment as well. For these reasons, the FDIC considered but rejected including LGD in the new statistical model. Nevertheless, after losses from failures during the recent crisis are more fully realized, it may be appropriate to consider whether LGD should be included in a small bank pricing model.

#### No Change

The FDIC also considered leaving the current small bank deposit insurance assessment system in place unchanged. While the backtesting discussed in Appendix 1 revealed that the new statistical model generally performed

<sup>54</sup> The second alternative would have the same assessment rate schedule go into effect the quarter after the reserve ratio reaches or exceeds 2 percent, but is less than 2.5 percent, as the first alternative and include the same maximum and minimum assessment rates determined by CAMELS composite ratings, except that it would lower the minimum initial assessment rate for a CAMELS composite 4 and 5 rated banks from 14 basis points to 10 basis points. Also, the second alternative would have the

same assessment rate schedule go into effect the quarter after the reserve ratio reaches or exceeds 2.5 percent as the first alternative, and include the same maximum and minimum assessment rates determined by CAMELS composite ratings (see Table 11), except that it would lower the minimum initial assessment rate for a CAMELS composite 4- and 5-rated banks from 13 basis points to 9 basis points.

<sup>55</sup> Under either alternative, if a bank's CAMELS composite or component ratings changed during a quarter (other than a change in CAMELS composite rating from a 4 to a 5 or a 5 to a 4 with no change in component ratings), including a change in CAMELS composite rating from a 1 to a 2 or a 2 to a 1, its assessment rate would be determined separately for each portion of the quarter in which it had different CAMELS composite or component ratings.

better than the current small bank deposit insurance assessment system, the current system performed relatively well. Nevertheless, the FDIC is proposing to change the small bank deposit insurance assessment system and base it on the new statistical model because the new model is superior to the current small bank deposit insurance assessment system. Under the proposed system, fewer riskier small banks would pay lower assessments and fewer safer banks would pay higher assessments than their conditions warrant.

VIII. Request for Comments

The FDIC seeks comment on every aspect of this proposed rulemaking, including the alternatives considered. In addition, the FDIC seeks comment on the following:

- Are there other variables, besides the eight included in the statistical model and proposal, that both predict the likelihood of bank failure with statistical significance and do not have perverse incentive effects?
- Are there variables that can be shown to predict likely losses given failure with statistical significance?
- Should the upper end of the assessment rate range decline from 35 basis points to 30 basis points as proposed or should higher assessment rates continue to apply to the riskiest banks?

IX. Regulatory Analysis

A. Regulatory Flexibility Act

The Regulatory Flexibility Act (RFA) requires that each federal agency either certify that a proposed rule would not,

if adopted in final form, have a significant economic impact on a substantial number of small entities or prepare an initial regulatory flexibility analysis of the proposal and publish the analysis for comment.<sup>56</sup> Certain types of rules, such as rules of particular applicability relating to rates or corporate or financial structures, or practices relating to such rates or structures, are expressly excluded from the definition of “rule” for purposes of the RFA.<sup>57</sup> The proposed rule relates directly to the rates imposed on insured depository institutions for deposit insurance and to the deposit insurance assessment system that measures risk and determines each established small bank’s assessment rate. Nonetheless, the FDIC is voluntarily undertaking an initial regulatory flexibility analysis of the proposal and seeking comment on it.

As of December 31, 2014, of the 6,509 insured commercial banks and savings institutions, there were 5,257 small insured depository institutions as that term is defined for purposes of the RFA (*i.e.*, those with \$550 million or less in assets).<sup>58</sup>

For purposes of this analysis, whether the FDIC were to collect needed assessments under the existing rule or under the proposed rule, the total amount of assessments collected would be the same. The FDIC’s total assessment needs are driven by the FDIC’s aggregate projected and actual insurance losses, expenses, investment income, and insured deposit growth, among other factors, and assessment rates are set pursuant to the FDIC’s long-term fund management plan. This analysis demonstrates how the new

pricing system under the proposed range of assessment rates of 3 basis points to 30 basis points (P330) could affect small entities relative to the current assessment rate schedule (C535) and relative to the rate schedule that under current regulations will be in effect when the reserve ratio exceeds 1.15 percent (C330). Using data as of December 31, 2014, the FDIC calculated the total assessments that would be collected under both rate schedules and under the proposed rule.

The economic impact of the proposal on each small institution for RFA purposes (*i.e.*, institutions with assets of \$550 million or less) was then calculated as the difference in annual assessments under the proposed rule compared to the existing rule as a percentage of the institution’s annual revenue and annual profits, assuming the same total assessments collected by the FDIC from the banking industry.<sup>59</sup>

Projected Effects on Small Entities Assuming a Range of Assessment Rates Under Both the Current Established Small Bank Deposit Insurance Assessment System and the Proposed System of 3 Basis Points to 30 Basis Points (P330–C330)

Based on the December 31, 2014 data, of the total of 5,257 small institutions, one institution would have experienced an increase in assessments equal to five percent or more of its total revenue. These figures do not reflect a significant economic impact on revenues for a substantial number of small insured institutions. Table 18 below sets forth the results of the analysis in more detail.

TABLE 18—PERCENT CHANGE IN ASSESSMENTS RESULTING FROM THE PROPOSAL  
[Assuming No Change in the Assessment Rate Range]

Change in assessments	Number of institutions	Percent of Institutions
More than 10 percent lower .....	0	0
5 to 10 percent lower .....	3	0
0 to 5 percent lower .....	3,296	63
0 to 5 percent higher .....	1,957	37
5 to 10 percent higher .....	1	0
More than 10 percent higher .....	0	0
Total .....	5,257	100

The FDIC performed a similar analysis to determine the impact on profits for small institutions. Based on December 31, 2014 data, of those small

institutions with reported profits, 21 institutions would have an increase in assessments equal to 10 percent or more of their profits. Again, these figures do

not reflect a significant economic impact on profits for a substantial number of small insured institutions.

<sup>56</sup> See 5 U.S.C. 603, 604 and 605.  
<sup>57</sup> 5 U.S.C. 601.  
<sup>58</sup> Throughout this RFA analysis (unlike the rest of this NPR), a “small institution” refers to an

institution with assets of \$550 million or less; a “small bank,” however, continues to refer to a small insured depository institution for purposes of deposit insurance assessments (generally, a bank with less than \$10 billion in assets).

<sup>59</sup> For purposes of the analysis, an institution’s total revenue is defined as the sum of its interest income and noninterest income and an institution’s profit is defined as income before taxes and extraordinary items.

Table 19 sets forth the results of the analysis in more detail.

**TABLE 19\*—ASSESSMENT CHANGES RELATIVE TO PROFITS FOR PROFITABLE SMALL INSTITUTIONS UNDER THE PROPOSAL**  
[Assuming No Change in the Assessment Rate Range]

Change in assessments relative to profits	Number of institutions	Percent of institutions
Decrease in assessments equal to more than 40 percent of profits .....	65	1
Decrease in assessments equal to 20 to 40 percent of profits .....	64	1
Decrease in assessments equal to 10 to 20 percent of profits .....	131	3
Decrease in assessments equal to 5 to 10 percent of profits .....	306	6
Decrease in assessments equal to 0 to 5 percent of profits .....	3,541	73
Increase in assessments equal to 0 to 5 percent of profits .....	706	14
Increase in assessments equal to 5 to 10 percent of profits .....	40	1
Increase in assessments equal to 10 to 20 percent of profits .....	8	0
Increase in assessments equal to 20 to 40 percent of profits .....	5	0
Increase in assessments equal to more than 40 percent of profits .....	8	0
Total .....	4,874	100

\*Institutions with negative or no profit were excluded. These institutions are shown in Table 20.

Table 19 excludes small institutions that either show no profit or show a loss, because a percentage cannot be calculated. The FDIC analyzed the effect of the proposal on these institutions by determining the annual assessment change (either an increase or a decrease) that would result. Table 20 below shows that 27 (seven percent) of the 383 small insured institutions with negative or no reported profits would have an increase of \$20,000 or more in their annual assessments.

**TABLE 20—CHANGE IN ASSESSMENTS FOR UNPROFITABLE SMALL INSTITUTIONS RESULTING FROM THE PROPOSAL**  
[Assuming No Change in the Assessment Rate Range]

Change in assessments	Number of Institutions	Percent of Institutions
\$20,000 or more decrease .....	170	44
\$10,000–\$20,000 decrease .....	74	19
\$5,000–\$10,000 decrease .....	43	11
\$1,000–\$5,000 decrease .....	28	7
\$0–\$1,000 decrease .....	11	3
\$0–\$1,000 increase .....	3	1
\$1,000–\$5,000 increase .....	16	4
\$5,000–\$10,000 increase .....	6	2
\$10,000–\$20,000 increase .....	5	1
\$20,000 increase or more .....	27	7
Total .....	383	100

Projected Effects on Small Entities Assuming a Range of Assessment Rates Under the Current Established Small Bank Deposit Insurance Assessment System of 5 Basis Points to 35 Basis Points and Under the Proposed System of 3 Basis Points to 30 Basis Points (Assessment Change P330–C535)

no institution would have experienced an increase in assessments equal to five percent or more of its total revenue. These figures do not reflect a significant economic impact on revenues for a substantial number of small insured institutions. Table 21 below sets forth the results of the analysis in more detail.

Based on the December 31, 2014 data, of the total of 5,257 small institutions,

**TABLE 21—PERCENT CHANGE IN ASSESSMENTS RESULTING FROM THE PROPOSAL**  
[Assuming Assessment Rate Range Change From 5–35 Bps to 3–30 Bps]

Change in assessments	Number of institutions	Percent of institutions
More than 10 percent or lower .....	4	0
5 to 10 percent lower .....	4	0
0 to 5 percent lower .....	4,969	95
0 to 5 percent higher .....	280	5
More than 5 percent higher .....	0	0
Total .....	5,257	100

The FDIC performed a similar analysis to determine the impact on profits for small institutions. Based on December 31, 2014 data, of those small institutions with reported profits, eight

institutions would have an increase in assessments equal to 10 percent or more of their profits. Again, these figures do not reflect a significant economic impact on profits for a substantial

number of small insured institutions. Table 22 sets forth the results of the analysis in more detail.

**TABLE 22\*—ASSESSMENT CHANGES RELATIVE TO PROFITS FOR PROFITABLE SMALL INSTITUTIONS UNDER THE PROPOSAL**  
[Assuming Assessment Rate Range Change From 5–35 Bps to 3–30 Bps]

Change in assessments relative to profits	Number of institutions	Percent of institutions
Decrease in assessments equal to more than 40 percent of profits .....	119	2
Decrease in assessments equal to 20 to 40 percent of profits .....	99	2
Decrease in assessments equal to 10 to 20 percent of profits .....	285	6
Decrease in assessments equal to 5 to 10 percent of profits .....	603	12
Decrease in assessments equal to 0 to 5 percent of profits .....	3,513	72
Increase in assessments equal to 0 to 5 percent of profits .....	239	5
Increase in assessments equal to 5 to 10 percent of profits .....	8	0
Increase in assessments equal to 10 to 20 percent of profits .....	4	0
Increase in assessments equal to 20 to 40 percent of profits .....	3	0
Increase in assessments equal to more than 40 percent of profits .....	1	0
Total .....	4,874	100

\* Institutions with negative or no profit were excluded. These institutions are shown in Table 23.

Table 22 excludes small institutions that either show no profit or show a loss, because a percentage cannot be calculated. The FDIC analyzed the effect of the proposal on these institutions by determining the annual assessment

change (either an increase or a decrease) that would result. Table 23 below shows that just 11 (three percent) of the 383 small insured institutions with negative or no reported profits would have an increase of \$20,000 or more in their

annual assessments. Again, these figures do not reflect a significant economic impact on profits for a substantial number of small insured institutions.

**TABLE 23—CHANGE IN ASSESSMENTS FOR UNPROFITABLE SMALL INSTITUTIONS RESULTING FROM THE PROPOSAL**  
[Assuming No Change in the Assessment Rate Range]

Change in assessments	Number of institutions	Percent of institutions
\$20,000 or more decrease .....	262	68
\$10,000–\$20,000 decrease .....	57	15
\$5,000–\$10,000 decrease .....	23	6
\$1,000–\$5,000 decrease .....	14	4
\$0–\$1,000 decrease .....	3	1
\$0–\$1,000 increase .....	1	0
\$1,000–\$5,000 increase .....	6	2
\$5,000–\$10,000 increase .....	1	0
\$10,000–\$20,000 increase .....	5	1
\$20,000 increase or more .....	11	3
Total .....	383	100

The proposed rule does not directly impose any “reporting” or “recordkeeping” requirements within the meaning of the Paperwork Reduction Act. The compliance requirements for the proposed rule would not exceed (and, in fact, would be the same as) existing compliance requirements for the current risk-based deposit insurance assessment system for small banks. The FDIC is unaware of any duplicative, overlapping or conflicting federal rules.

The initial RFA analysis set forth above demonstrates that, if adopted in final form, the proposed rule would not have a significant economic impact on a substantial number of small

institutions within the meaning of those terms as used in the RFA.<sup>60</sup>

Commenters are invited to provide the FDIC with any information they may have about the likely quantitative effects of the proposal on small insured depository institutions (those with \$550 million or less in assets).

#### *B. Riegle Community Development and Regulatory Improvement Act:*

The Riegle Community Development and Regulatory Improvement Act (RCDRIA) requires that the FDIC, in determining the effective date and administrative compliance requirements of new regulations that impose

additional reporting, disclosure, or other requirements on insured depository institutions, consider, consistent with principles of safety and soundness and the public interest, any administrative burdens that such regulations would place on depository institutions, including small depository institutions, and customers of depository institutions, as well as the benefits of such regulations.<sup>61</sup>

This NPR proposes no additional reporting or disclosure requirements on insured depository institutions, including small depository institutions, nor on the customers of depository institutions.

<sup>60</sup> 5 U.S.C. 605.

<sup>61</sup> 12 U.S.C. 4802.



### C. Paperwork Reduction Act:

No collections of information pursuant to the Paperwork Reductions Act (44 U.S.C. 3501 *et seq.*) are contained in the proposed rule.

### D. The Treasury and General Government Appropriations Act, 1999—Assessment of Federal Regulations and Policies on Families

The FDIC has determined that the proposed rule will not affect family well-being within the meaning of section 654 of the Treasury and General Government Appropriations Act, enacted as part of the Omnibus Consolidated and Emergency Supplemental Appropriations Act of 1999 (Pub. L. 105–277, 112 Stat. 2681).

### E. Solicitation of Comments on Use of Plain Language

Section 722 of the Gramm-Leach-Bliley Act, Public Law 106–102, 113 Stat. 1338, 1471 (Nov. 12, 1999), requires the Federal banking agencies to use plain language in all proposed and final rules published after January 1, 2000. The FDIC invites your comments on how to make this proposal easier to understand. For example:

- Has the FDIC organized the material to suit your needs? If not, how could the material be better organized?
- Are the requirements in the proposed regulation clearly stated? If not, how could the regulation be stated more clearly?
- Does the proposed regulation contain language or jargon that is unclear? If so, which language requires clarification?
- Would a different format (grouping and order of sections, use of headings, paragraphing) make the regulation easier to understand?

### Appendix 1—Description of Statistical Model Underlying Proposed Method for Determining Deposit Insurance Assessments For Established Small Insured Depository Institutions

This appendix provides a technical description of the statistical model (the “new model”)<sup>62</sup> underlying the proposed method for determining deposit insurance assessments for established small banks. The appendix provides background information, reviews the data and methodology used to estimate the new model underlying the proposed method, discusses estimation results and alternative specifications considered, and evaluates the results.

<sup>62</sup> The preamble to the NPR refers to the new model as the “statistical model.”

## I. Background

### A. RRPS

The current small bank deposit insurance assessment system has been in effect, with some modifications, since January 1, 2007. The current small bank deposit insurance system assigns assessment rates in several steps. The first step assigns small banks to risk categories. The categories are jointly determined by bank capital and supervisory ratings. Well-capitalized small banks rated CAMELS 1 or 2 are placed in Risk Category I.<sup>63</sup> Small banks with lower capital or weaker CAMELS ratings are placed in either Risk Category II, Risk Category III or Risk Category IV.

The second step differentiates risk further among Risk Category I small banks using the *financial ratios method*, which combines supervisory CAMELS component ratings with current financial ratios to determine a Risk Category I small bank’s initial assessment rate. The contribution of these variables (the CAMELS component ratings and the financial ratios) to assessment rates is determined using a linear model (the downgrade probability model or existing model) estimating the probability that a CAMELS 1- or 2-rated bank will be downgraded to a CAMELS rating of 3 or worse within 12 months.

In November 2006, when the final rule establishing the current small bank deposit insurance system was adopted, it had been more than a decade since the United States experienced a significant number of bank failures. Consequently, historical downgrades were used as a proxy for the risk to the DIF of a bank’s failure.

The data generated by the rash of bank failures since the financial crisis of 2008 suggests that the model underlying the small bank deposit insurance assessment system can be improved and updated.

### B. Probability of Default

The data generated from the approximately 500 bank failures since 2008 suggests that the probability of downgrade probability model can be replaced by a probability of default (that is, a probability of failure) model. Failures are nearly always costly to the FDIC, whereas downgrades lead to DIF losses relatively infrequently, since many downgraded banks do not fail.

<sup>63</sup> Unless explicitly stated otherwise, references to CAMELS ratings are references to CAMELS composite ratings.

### C. Loss Given Default

Though expected losses to the DIF are a function of both the probability of a default (PD) and the loss given default (LGD), the new model estimates only the PD. LGD was not modeled. Actual losses for many of the failed banks during the crisis are still estimated, primarily because of the use of loss-sharing agreements that have not yet terminated. Until the losses are actually realized, estimating a loss given default model using current data would be circular, as FDIC models are used to estimate expected losses where losses have not yet been realized. Relying solely on realized losses would exclude much of the failure data from the recent crisis, leaving mainly failure data from the banking crisis of the late 1980s and early 1990s. However, the vast majority of the bank failures in that crisis occurred in a different regulatory regime (prior to the Federal Deposit Insurance Corporation Improvement Act of 1991<sup>64</sup>) and may, therefore, not reflect expected LGD in the current environment as well. See Bennett and Unal (2014).

Notwithstanding these concerns, a careful consideration of whether future rulemaking should include LGD in a small bank deposit insurance assessment model may be appropriate after most losses are realized from failures during the recent crisis.

## II. Methodology

### A. Variable Selection

In addition to the existing model, the FDIC relied on other existing models of bank risk, both regulatory and academic, to select candidate variables for inclusion in the new model.

#### 1. SCOR

The Statistical CAMELS Offsite Rating (SCOR) system is one of FDIC’s offsite monitoring models and is used to identify banks whose financial condition has deteriorated since their last on-site examination. SCOR is designed as a short-term model with a one-year forecast horizon, to identify institutions that are currently CAMELS 1 or 2 rated that might receive a rating of CAMELS 3, 4 or 5 at the next examination.

The SCOR model uses an ordered logistic regression to predict the composite CAMELS rating and the six CAMELS component ratings. A logistic regression allows for nonlinear relationships between each explanatory

<sup>64</sup> FDIC (1998), Legislation Governing the FDIC’s Roles as Insurer and Receiver,” from *Managing the Crisis*, <https://www.fdic.gov/bank/historical/managing/history3-A.pdf>, p. 774–747.

variable and the dependent variable (the variable that depends upon the explanatory variable). In an ordered logistic regression, the dependent variable (CAMELS) can only have discrete values that are ordered. (In the case of CAMELS, the ordered values are 1 through 5.) The other variables (the explanatory variables) are then used to predict the likelihood of observing each of the possible outcomes.

SCOR uses twelve variables to measure banks' financial condition. These financial measures are (as a ratio to total assets): equity, loan loss reserves, loans past due 30–89 days, loans past due 90+ days, nonaccrual loans, other real estate owned, charge-offs, provisions for loan losses and transfer risk, income before taxes and extraordinary charges, volatile liabilities, liquid assets, and loans and long term securities.<sup>65</sup>

2. GMS

The Growth Monitoring System (GMS) is one of FDIC's offsite monitoring models designed to monitor banks' risk taking associated with rapid growth and heavy reliance on non-traditional sources of funds. GMS is designed to identify distress and failure before bank conditions actually weaken, thereby allowing supervisors to take preventive action.

GMS estimates the likelihood that a bank will be downgraded from a CAMELS 1 or 2 rating to a CAMELS 3, 4 or 5 rating within three years as a function of the bank's current risk characteristics. The explanatory variables include a bank's asset growth, equity ratio, loan to asset ratio, noncore funds to asset ratio, change in loan mix index, reserve coverage ratio and a binary variable indicating whether a bank is currently CAMELS 1 rated.<sup>66</sup>

3. Academic

There exist numerous papers discussing models that predict bank failures. In these papers, the explanatory

variables predicting bank failures are largely divided into measures of (1) capital; (2) asset quality; (3) earnings; (4) liquidity; (5) sensitivity to market risk; and (6) other risk measures.

A bank's capital adequacy is an important predictor of its survival because it provides a cushion to withstand unanticipated losses. Studies have used a total equity to total assets ratio (Santoni, Ricci, and Kelshiker (2010), Betz, Oprica, Peltonen, Sarlin (2012)) or the leverage ratio (Santoni, Ricci, and Kelshiker (2010)) to measure a bank's equity position. These studies find that higher capital ratios are correlated with lower failure probability.

To measure a bank's asset quality, nonperforming loans (Wheelock and Wilson (2000), Santoni, Ricci, and Kelshiker (2010), Gilbert, Meyer, and Vaughan (1999)) and other real estate owned to total assets ratios have been used. A large volume of nonperforming loans and other real estate owned relative to total loans (or total assets) signal low credit quality in a bank's loan portfolio.

Higher bank earnings also provide a cushion to withstand adverse economic shocks and lower failure probability. To measure bank earnings, measures such as net income before taxes, interest expense (Betz, Oprica, Peltonen, Sarlin (2012)), and total operating income (Lane, Looney, and Wansley (1986)) have been used.

Loan portfolio ratios, such as commercial and industrial (C&I) loans, commercial real estate loans, construction and development (C&D) loans, and consumer loans (Cole and Gunther (1995), Whalen (1991), Lane, Looney, and Wansley (1986)), have been used to measure a bank's concentration in different loan types.

Rapid loan growth or asset growth can be indicators of a bank's aggressive risk-taking and of underwriting loans or acquiring assets with lower creditworthiness. A correlation between

rapid credit growth and bank distress has been well documented in academic research (Soltila and Vihriala (1994), Clair (1992), Salas and Saurina (2002), Keeton (1999), Foos, Norden, and Weber (2009), and Logan (2001)).

Liquidity measures include a core deposits to total assets ratio (Gilbert, Meyer, Vaughan (1999)) and a liquid assets to total assets ratio (Gilbert, Meyer, Vaughan (1999), Lane, Looney, and Wansley (1986)). These measures can indicate a bank's ability to meet unexpected liquidity needs. A high loans to total deposits ratio (Gilbert, Meyer, Vaughan (1999)) or loans to total assets ratio can indicate a bank's illiquidity, since loans are typically less liquid than other assets on a bank's balance sheet.

Bank size (Gilbert, Meyer, Vaughan (1999), Wheelock and Wilson (2000)) can predict failure likelihood, since large banks can benefit from diversification across product lines and geographic regions.

Whether a bank is a part of a holding company is another measure used by some studies (Gilbert, Meyer, Vaughan (1999), Wheelock and Wilson (2000)). An indicator of holding company affiliation can predict failure probability, since a holding company can serve as a source of strength to banks.

Onali (2012) finds a positive relation between bank default risk and dividend payout ratios. This finding is consistent with the theory that dividend payouts exacerbate moral hazard. He finds, however, that the relationship is insignificant for banks that are very close to failure.

B. Variables

Table 1.1 lists and describes the variables that are included in the new model as the result of reviewing academic studies on bank risk and testing candidate variables.

TABLE 1.1—NEW MODEL VARIABLE DESCRIPTION

Variables	Description
Tier 1 Leverage Ratio (%) .....	Tier 1 capital divided by adjusted average assets. (Numerator and denominator are both based on the definition for prompt corrective action.)
Net Income before Taxes/Total Assets (%) .....	Income (before income taxes and extraordinary items and other adjustments) for the most recent twelve months divided by total assets.
Nonperforming Loans and Leases/Gross Assets <sup>67</sup> (%) ....	Sum of total loans and lease financing receivables past due 90 or more days and still accruing interest and total nonaccrual loans and lease financing receivables (excluding, in both cases, the maximum amount recoverable from the U.S. Government, its agencies or government-sponsored enterprises, under guarantee or insurance provisions) divided by gross assets.*

<sup>65</sup> Detailed description of the model and the variables used in SCOR can be found in "The SCOR System of Off-Site Monitoring: Its Objectives,

Functioning, and Performance," Collier, Forbush, Nuxoll, and O'Keefe (2003).

<sup>66</sup> Detailed description of the GMS model can be found in "Bank Growth and Long Term Risk," Hwa, Jacewitz, and Yom (May 2011).

TABLE 1.1—NEW MODEL VARIABLE DESCRIPTION—Continued

Variables	Description
Other Real Estate Owned/Gross Assets (%) .....	Other real estate owned divided by gross assets.
Core Deposits/Total Assets (%) .....	Domestic office deposits (excluding time deposits over the deposit insurance limit and the amount of brokered deposits below the standard maximum deposit insurance amount) divided by total assets.
Weighted Average of C, A, M, E, L, and S Component Ratings.	The weighted sum of the “C,” “A,” “M,” “E,” “L,” and “S” CAMELS components, with weights of 25 percent each for the “C” and “M” components, 20 percent for the “A” component, and 10 percent each for the “E,” “L,” and “S” components. In instances where the “S” component is missing, the remaining components are scaled by a factor of 10/9.**
Loan Mix Index .....	A measure of credit risk described below.
Asset Growth (%) .....	Growth in assets (merger adjusted) over the previous year. If growth is negative, then the value is set to zero.

<sup>67</sup> “Gross assets” are total assets plus the allowance for loan and lease financing receivable losses (ALLL); for purposes of estimating the statistical model, for years before 2001, when allocated transfer risk was not included in ALLL in Call Reports, allocated transfer risk was included in gross assets separately.

\* Delinquency and non-accrual data on government guaranteed loans are not available for the entire estimation period. As a result, the model is estimated without deducting delinquent or past-due government guaranteed loans from the nonperforming loans and leases to gross assets ratio.

\*\* The component rating for sensitivity to market risk (the “S” rating) is not available for years before 1997. As a result, and as described in the table, the model is estimated using a weighted average of five component ratings excluding the “S” component where the component is not available.

### 1. Equity

The new model includes the leverage ratio (as defined in the FDIC’s capital regulations<sup>68</sup>). This variable was statistically significant across specifications (that is, it was statistically significant regardless of the other variables included in the model).

### 2. Loan Mix Index

Consistent with the GMS model, the FDIC included a loan mix index (“LMI”) variable that aggregates a bank’s loan portfolio and historical loan category charge-offs into a single variable. Statistically, combining the loan categories into a single index increases the explanatory power of the model.

For each loan category, the LMI assigns an industry-wide charge-off rate based on historical data. A bank’s LMI value is then the sum of the products of each of that bank’s loan category exposures as a percentage of total assets and the associated charge-off rate. Appendix 1.1 to the Supplementary Information section of this notice shows how the LMI is constructed for a hypothetical bank.

In constructing the LMI, many alternatives were considered, including: using the change in a bank’s amount of loans in a loan category rather than simply the amount of loans in a loan category, weighting charge-offs more heavily during crises and evaluating loans in a loan category as a proportion of total loans rather than as a proportion of assets.

Both in in-sample and out-of-sample backtesting, the LMI using a bank’s amount of loans in a loan category had

higher forecast accuracy than using the change in a bank’s amount of loans in a loan category from a previous period. In-sample backtesting compares model forecasts to actual outcomes where those outcomes are included in the data used in model development. Out-of-sample backtesting is the comparison of model predictions against outcomes where those outcomes are not used as part of the model development used to generate predictions.

In-sample, all of the explanatory power came from using the amount of loans in a loan category. Out-of-sample, including the change in a bank’s amount of loans in a loan category in addition to the amount of loans in a loan category did not improve performance.

Three alternative methods of averaging yearly historical industry-wide charge-off rates were considered: an unweighted average of each year’s industry-wide charge-off rate, an unweighted average of each of the recent crisis years’ industry-wide charge-off rates, and an average of each year’s industry-wide charge-off rate weighted by the number of bank failures in the year. Out-of-sample performance for the LMI variable using an average weighted by the number of bank failures in the year slightly outperformed the LMI variable using an unweighted average over recent crisis years and more significantly outperformed the LMI variable using an unweighted average. The LMI variable using an average weighted by the number of bank failures in a year was selected over the LMI variable using an unweighted average over recent crisis years because the latter variable requires a determination of what constitutes a

crisis. No such determination is necessary using the variable selected.

The FDIC also considered using total loans as the denominator of the LMI along with a liquidity variable, but elected to use total assets as the denominator to avoid imposing excessive penalties on banks that hold few loans relative to assets. (The liquidity variable was not statistically significant when total assets were used as the denominator.) Using loans as a proportion of total assets has the advantage of not extrapolating risk exposures in loans to a bank’s entire asset portfolio, although it effectively assigns zero risk to all non-loan assets, implicitly treating loans as riskier than investments in other assets. Many of these other assets, however, are liquid assets. Out-of-sample performance of the models using total assets as the denominator did not differ much from the performance using total loans as the denominator along with a liquidity variable.

### 3. Asset Growth

Among the variables included in the specifications was a one-year asset growth rate. The FDIC also considered a two-year growth rate and lagged one- and two-year growth rates. The one-year growth rates generally had the most explanatory power and additional growth rates did not tend to improve the model’s fit.

Mergers of troubled banks into healthier banks and purchases of failed banks help limit losses to the DIF. Penalizing banks for growth that occurs through the acquisition of troubled or failed banks would create a disincentive for such mergers. Consequently, bank

<sup>68</sup> 12 CFR 3.10; 12 CFR 217.10; 12 CFR 324.10.

asset growth was adjusted to remove growth resulting from mergers and failed bank acquisitions.

#### 4. Income

Consistent with previous findings, net income before taxes was found to be a significant explanatory variable.

#### 5. Core Deposits

Early test versions of the new model used noncore liabilities as a variable predictive of failure. This variable was statistically significant in-sample across all specifications with a positive correlation with failure. Subsequent versions used core deposits as the alternative variable. It provides similar predictive power, and is the variable maintained for the proposed version of the new model.

#### 6. Nonperforming Loans and Leases

Nonperforming loans and leases are defined as the sum of total loans and leases past due 90 or more days and total nonaccrual loans and leases. This variable, which measures bank asset quality, was found to be a statistically significant predictor of failure.

#### 7. Other Real Estate Owned

The ratio of other real estate owned to gross assets is another measure of a bank's asset quality and was a significant predictor of failure across specifications.

#### 8. CAMELS

A weighted CAMELS component variable was included in the new model to capture examination ratings. The weighted CAMELS component variable is calculated with the following weights on the component ratings: Capital (25%), Asset quality (20%), Management (25%), Earnings (10%), Liquidity (10%), Sensitivity to market risk (10%). For model estimation, in instances where the "S" component is missing, the remaining components are scaled by a factor of 10/9.

Other specifications tested separate dummy variables for CAMELS composite ratings of 3, 4, and 5. (A dummy variable for CAMELS 2 composite ratings was not statistically significant.) However, the single weighted CAMELS component measure performed comparably in out-of-sample tests and was chosen over the dummy variable specification for both the reduction in the number of variables, for its more continuous treatment of examination ratings and for its consistency with the current financial ratios method.

### C. Considered Variables

#### 1. Loan Loss Reserves

Loan loss reserves were tested in the development of the new model and were a positive predictor of failure across all specifications. Including reserves in the new model, however, would lead to higher deposit insurance assessments for banks with higher loan loss reserves, creating a disincentive for banks to build these reserves. Because loan loss reserves protect the FDIC in the event of failure, they were ultimately excluded from the new model. (Loan loss reserves were excluded from the downgrade probability model for the same reason.) The losses to forecasting accuracy were small.

#### 2. Lagged moving averages

To capture the possibility that changes in variables (as opposed to point-in-time values of variables) are correlated with failure, the FDIC tested the model using lagged moving averages. In theory, these lagged moving averages could also capture the effect of variables that do not change frequently. However, lagged moving averages were not consistently significant across specifications.

#### 3. Insignificant Variables

A number of variables were also tested but ultimately not included in the model because they did not remain statistically significant across specifications. These variables are listed in Appendix 1.2 to the Supplementary Information section of this notice.

### D. Excluded Variables

#### 1. Distance to Default

Distance to default measures, which compare the amount of loss absorbing capital against the volatility of the return on underlying assets, are commonly used in failure prediction models. These variables are generally constructed with market data. However, such measures are not available for most small banks.

#### 2. Macroeconomic Variables

Macroeconomic variables were excluded for three primary reasons. First, the assessment rates proposed are (and the rates previously adopted by the FDIC's Board were) explicitly intended to reduce procyclicality; that is, to maintain a positive reserve ratio while keeping relatively constant assessment rates.<sup>69</sup> Second, macroeconomic factors would add considerable complexity to

the model. Finally, macroeconomic factors are imprecise measures of economic conditions for small banks that often operate only locally.

#### 3. Holding Company Affiliation

The FDIC does not believe it is appropriate to charge a small bank a higher assessment rate because it is not part of a multi-bank holding company; consequently, the new model does not include a measure indicating whether a bank is a part of a holding company.

#### 4. Brokered Deposits

The FDIC ultimately chose the related measure of core deposits (see above).

#### 5. Bank Size

The FDIC is disinclined to discriminate for deposit insurance assessment purposes based on the size of an established small bank. Assessing the smallest banks at higher rates because of their size would raise the costs of many banks that are the only bank in their community. Assessing the largest of the small banks at higher rates because of their size would impair their ability to compete with large banks, which are not charged higher rates based on their size.

## III. Estimation Model

### A. Shumway (2001)

The FDIC chose to estimate failure using a discrete-time hazard model with a constant hazard rate. Hazard models are designed to capture the duration of time until a particular event occurs (in this case, bank failure). The defining feature of a hazard model is that at every interval of time, a bank is exposed to some risk of failure that depends on certain observed measures. If the bank fails during a period, then it is not in the sample for later periods. If the bank survives, then it remains in the sample the following period and is exposed to a new risk of failure that depends on any changes in the bank risk variables. The FDIC used a discrete time assumption because of the regular reporting schedule for Call Report data, and the simplicity and transparency of estimation. A discrete time assumption implies that only the failure or survival of the bank is modeled for a given time period. This is in contrast to a continuous time model that also considers the exact failure time within that time period.

Shumway (2001) demonstrates that if each period's probability of failure (or default probability) follows a logistic function, then the discrete-time hazard model is equivalent to a multi-period logistic model. The logistic function relates a set of variables (in this case,

<sup>69</sup> See 75 FR 66272, 66273–66281, 66292 (Oct. 27, 2010).

measures of bank risk) to a number between 0 and 1 (in this case, the probability of bank failure). It is nonlinear, so that the effect of a change in the values of bank risk variables on the probability of bank failure depends on the level of bank risk. A multi-period logistic model estimates the probability of failure for all observations across banks and time. However, relative to a pooled logistic model in which each bank-year observation is treated as an independent event, the standard errors of the coefficients of a discrete-time hazard model require an adjustment. The adjustment is required because of the serial dependence of the failure variable; a bank that is observed in any period necessarily has not failed in any previous period and any bank that fails necessarily drops out of the sample after failing.

A multi-period model was chosen over a single time period model. A single time period failure model requires the choice of the appropriate estimation time period. Therefore, it is unable to exploit data outside of the chosen time horizon and cannot be readily adapted to include new data. For example, a single time period model could not be used to capture bank failures in the 1990s, stability in the early 2000s, and the bank failures following the 2008 financial crisis. Furthermore, there is no systematic way to choose the right sample period for a static model.

The FDIC imposed a constant hazard rate on the model. A constant hazard rate implies that the age of the bank does not affect its likelihood of future failure. This is in contrast to a non-constant hazard rate that may be more appropriate for newer banks that do not yet have an established business model or management. However, new banks are excluded from the model. Because there is no relationship between the age of an established bank (one at least five years old) and failure, a constant hazard rate is more appropriate.

#### C. Time Horizon

Because deposit insurance assessments should ideally reflect risks posed by banking activity as they are assumed rather than when they are realized, a three year time horizon was

chosen for both the estimation and forecasting periods. To obtain predictions for the three-year forecast, the FDIC considered one-year, two-year, and three-year time horizons in estimating the new model. In each case, the FDIC used only contemporaneous data to calculate three-year forecasts. That is, the FDIC alternatively used one-year, two-year, and three-year intervals in the estimation period (1984–2010) to forecast failures out-of-sample from January 1, 2011 through December 31, 2013 based on yearend 2010 data. The three-year interval tended to outperform the one- and two-year intervals for three-year out-of-sample forecasting.

#### D. In-Sample Estimation

The in-sample estimation time period was chosen to be 1985 through 2011, incorporating Call Report data through the end of 2011 and failures through the end of 2014.

To avoid having overlapping three-year look-ahead periods for a given regression, each regression uses data in which only every third year is included. One regression uses insured depository institutions' Call Report and TFR data for the end of 1985 and failures from 1986 through 1988; Call Report and TFR data for the end of 1988 and failures from 1989 through 1991; and so on, ending with Call Report data for the end of 2009 and failures from 2010 through 2012. (See Table 1.2A below.) The second regression uses insured depository institutions' Call Report and TFR data for the end of 1986 and failures from 1987 through 1989, and so on, ending with Call Report data for the end of 2010 and failures from 2011 through 2013. (See Table 1.2B below.) The third regression uses insured depository institutions' Call Report and TFR data for the end of 1987 and failures from 1988 through 1990, and so on, ending with Call Report data for the end of 2011 and failures from 2012 through 2014. (See Table 1.2C below.) Since there is no particular reason for favoring any one of these three regressions over another, the actual model estimates are constructed as an average of each of the three regression estimates for each parameter.

The regressions only include observations for institutions that are at

least five years of age, since younger institutions will be subject to a different assessment methodology. Also, since the model will be applied to banks with under \$10 billion in assets, larger banks are not included in the regressions.

The data used for estimation is winsorized (that is, extreme values in the data are reset to reduce the effect of outliers) at the 1st percentile and 99th percentile levels for each year. For example, if a variable for a bank has a value greater than the 99th percentile value for that year, then the value for that bank is set to the 99th percentile value before estimation is made.

The test statistics applied follow the analysis of Shumway (2001). In Shumway's formulation, the standard test statistics from a logistic regression used to assess statistical significance are divided by the average number of bank-years per bank; this adjustment corrects for the lack of independence between bank-year observations. That is, an adjustment is made to account for a bank no longer being observed after failure. In tables 1.2A, 1.2B, and 1.2C below, "WaldChiSq2" shows the adjusted  $\chi$ -square statistic, and "ProbChiSq2" the associated probability value. (The lower the value of ProbChiSq2, the more statistically significant is the parameter estimate. Parameter estimates with a ProbChiSq2 below .05 are considered to be statistically significant at the .05 level.)

As reported in Tables 1.2A, 1.2B, and 1.2C, banks with a higher leverage ratio are less likely to fail within the next three years. Similarly, banks' earnings before taxes and their core deposits to assets ratios are negatively correlated with failure probability. In contrast, nonperforming loans and the other real estate owned to assets ratios are positively correlated with failure probability. Moreover, banks with a higher LMI, faster asset growth, and worse weighted CAMELS component ratings are more likely to fail within the next three years.

The estimated coefficients of the variables are statistically significant at the 5% level for all three regression sets except for the asset growth rate variable. The asset growth rate is statistically significant for two out of the three regressions.

TABLE 1.2A.—REGRESSION WITH DECEMBER 2009 AS LAST DATA POINT FOR INDEPENDENT VARIABLES

Variable description	Estimate	WaldChiSq2	ProbChiSq2
Intercept .....	−2.8919	17.3025	0.000032
Tier 1 Leverage Ratio (%) .....	−0.3522	82.6065	0.000000
Net Income before Taxes/Total Assets (%) .....	−0.1197	8.0705	0.004499
Loan Mix Index .....	0.0152	41.9399	0.000000
Core Deposits/Total Assets (%) .....	−0.0265	23.7705	0.000001

TABLE 1.2A.—REGRESSION WITH DECEMBER 2009 AS LAST DATA POINT FOR INDEPENDENT VARIABLES—Continued

Variable description	Estimate	WaldChiSq2	ProbChiSq2
Nonperforming Loans and Leases/Gross Assets (%) .....	0.2597	53.1450	0.000000
Other Real Estate Owned/Gross Assets (%) .....	0.1498	10.8676	0.000979
Asset Growth .....	0.0161	8.1715	0.004255
Weighted Average of C, A, M, E, L and S Component Ratings .....	0.4888	20.4650	0.000006

TABLE 1.2B.—REGRESSION WITH DECEMBER 2010 AS LAST DATA POINT FOR INDEPENDENT VARIABLES

Variable description	Estimate	WaldChiSq2	ProbChiSq2
Intercept .....	−1.8213	7.9746	0.004744
Tier 1 Leverage Ratio (%) .....	−0.3603	82.0847	0.000000
Net Income before Taxes/Total Assets (%) .....	−0.1585	12.7807	0.000350
Loan Mix Index .....	0.0210	106.2229	0.000000
Core Deposits/Total Assets (%) .....	−0.0398	54.8076	0.000000
Nonperforming Loans and Leases/Gross Assets (%) .....	0.2358	39.1907	0.000000
Other Real Estate Owned/Gross Assets (%) .....	0.1801	17.7846	0.000025
Asset Growth .....	0.0046	0.5448	0.460463
Weighted Average of C, A, M, E, L and S Component Ratings .....	0.3432	9.9098	0.001644

TABLE 1.2C.—REGRESSION WITH DECEMBER 2011 AS LAST DATA POINT FOR INDEPENDENT VARIABLES

Variable Description	Estimate	WaldChiSq2	ProbChiSq2
Intercept .....	−2.1862	10.9481	0.000937
Tier 1 Leverage Ratio (%) .....	−0.3410	75.4433	0.000000
Net Income before Taxes/Total Assets (%) .....	−0.2354	31.0665	0.000000
Loan Mix Index .....	0.0157	43.3664	0.000000
Core Deposits/Total Assets (%) .....	−0.0429	59.4956	0.000000
Nonperforming Loans and Leases/Gross Assets (%) .....	0.2325	37.6910	0.000000
Other Real Estate Owned/Gross Assets (%) .....	0.1584	12.0705	0.000512
Asset Growth .....	0.0133	5.5076	0.018934
Weighted Average of C, A, M, E, L and S Component Ratings .....	0.5318	22.3623	0.000002

The parameter estimates applied for the assessments are the average of the estimates from the three regressions above. These average values are shown in table 1.2D.

TABLE 1.2D.—AVERAGE OF THE PARAMETER ESTIMATES OVER THREE REGRESSIONS

Variable description	Estimate
Intercept .....	−2.2998
Tier 1 Leverage Ratio (%) .....	−0.3512
Net Income before Taxes/Total Assets (%) .....	−0.1712
Loan Mix Index .....	0.0173
Core Deposits/Total Assets (%) .....	−0.0364
Nonperforming Loans and Leases/Gross Assets (%) .....	0.2427
Other Real Estate Owned/Gross Assets (%) .....	0.1628
Asset Growth .....	0.0113
Weighted Average of C, A, M, E, L and S Component Ratings .....	0.4546

When the new model is used to determine assessment rates, the variables Asset Growth and Net Income before Taxes/Total Assets are each bounded as follows:

Asset Growth  $\leq 190$ –25  $\leq$  Net Income before Taxes/Total Assets  $\leq 3$ .

For example, if Asset Growth is greater than 190 (percent) then it is reset to 190 to determine assessment rates. After the parameters shown in table 1.2D were obtained, the values of these bounds were determined by performing an iterative series of backtests covering data from 1985 to 2011, with each iteration testing a different combination of bounds; the combination of bounds that resulted in the best rank correlation (Kendall's tau) between probability of failure and actual failure is the combination of bounds selected.

#### IV. Validation

##### A. Backtest Comparison of the Proposal to the Current RRPS System

Using initial base assessment rates,<sup>70</sup> the FDIC also compared the out-of-sample forecast accuracy of the proposal

<sup>70</sup> The current small bank deposit insurance assessment system did not exist at the end of 2006 and existed in somewhat different forms in years before 2011. The comparison assumes that the small bank deposit insurance assessment system in its current form and the proposal in this NPR (assuming a revenue neutral conversion to assessment rates as of the end of 2014) had been in effect in each year of the comparison.

in this NPR, which is based on the new model, to the current small bank deposit insurance system's financial ratios method's assessment rankings.<sup>71</sup> Comparisons were made for projections as of the end of six different years, 2006 through 2011, and are shown graphically using cumulative accuracy profile (CAP) curves. A CAP curve is illustrated in Figure 1.1. Suppose that banks are ranked on a percentile basis according to a model's predicted probability of failure, with the ranking in descending order. Thus the banks with the highest predicted probability of failure would have a percentile rank near zero, while the banks with the

<sup>71</sup> For the out-of-sample backtests, the parameters applied are the average of the parameters from three separate regressions, as in the new model, except with more recent three-year periods omitted. Using Table 1.3 as an example, one regression uses data from the end of 1985 and failures from 1986 through 1988; data for the end of 1988 and failures from 1989 through 1991; and so on, ending with data for the end of 2003 and failures from 2004 through 2006. The second regression uses data from the end of 1987 and failures from 1988 through 1990, and so on, ending with data for the end of 2002 and failures from 2003 through 2005. The third regression uses data from the end of 1986 and failures from 1987 through 1989, and so on, ending with data for the end of 2001 and failures from 2002 through 2004.

lowest predicted probability of failure would have a percentile rank near 100. In Figure 1.1, the horizontal axis represents this bank percentile rank. The vertical axis represents the

cumulative percentage of actual failures. For example, the point marked by "X" indicates that the 30 percent of banks with the highest projected probability of failure included 50 percent of the banks

that actually failed. In general, when comparing a CAP curve for alternative models, a model with a higher CAP curve (one with more area underneath it) would be the superior model.

**Figure 1.1. Cumulative Accuracy Profile (CAP) Illustration**

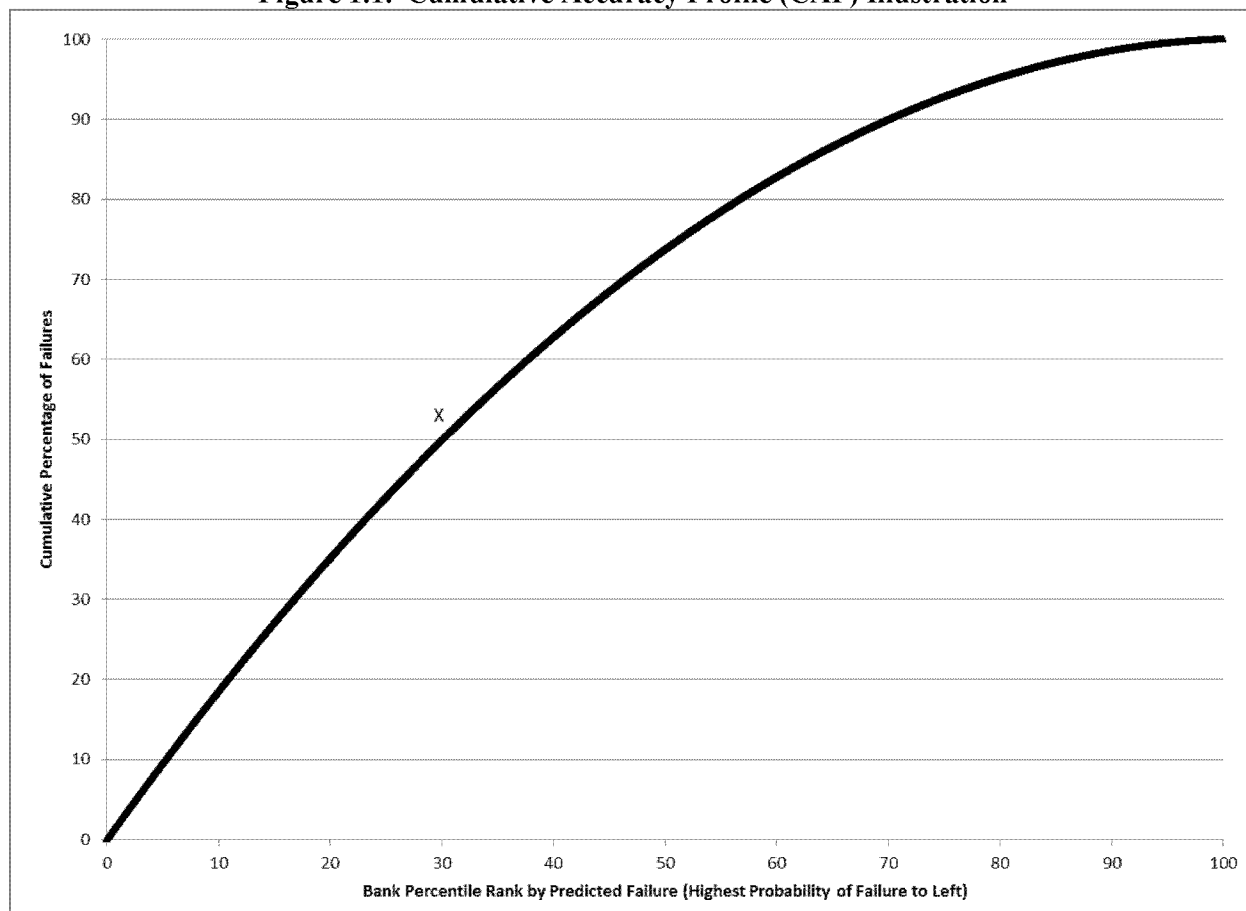


Figure 1.2 shows the CAP curve for a model (dotted line) compared with two limiting CAP curves. The "random" curve (single straight line) shows what the CAP would look like if the model prediction were purely random; for example, the 30 percent of banks with

the highest failure projections would include 30 percent of actual failures. At the other extreme, the two solid straight lines show a CAP curve for a model that perfectly differentiates banks that fail from banks that do not in its projections; thus, for example, assuming that 20


percent of all banks actually failed, for the "perfect" model, the 20 percent of banks with the highest projected failure probability would identify 100 percent of failures.<sup>72</sup>

<sup>72</sup> The accuracy ratio can be derived from the CAP curve. For the model depicted by the curved line in Figure 1.2, the area between the curved line and the dotted straight line is a measure of the superiority of the model over the random benchmark. The area between the solid line and the

dotted straight line is a measure of the superiority of a "perfect" model over the random benchmark. The ratio of these two areas is the accuracy ratio for the model depicted by the curved line. The value is normalized so that it is always less than or equal to 1. An accuracy ratio of 1 occurs in the

case of a perfect model, and is 0 in the case of a model that does no better than random guessing. (For the illustrative example in Figure 1.2, the accuracy ratio of the model depicted by the curved line is .396.)

Figure 1.2. Cumulative Accuracy Profile (CAP) Illustration Compared with “Perfect” and Random Cases

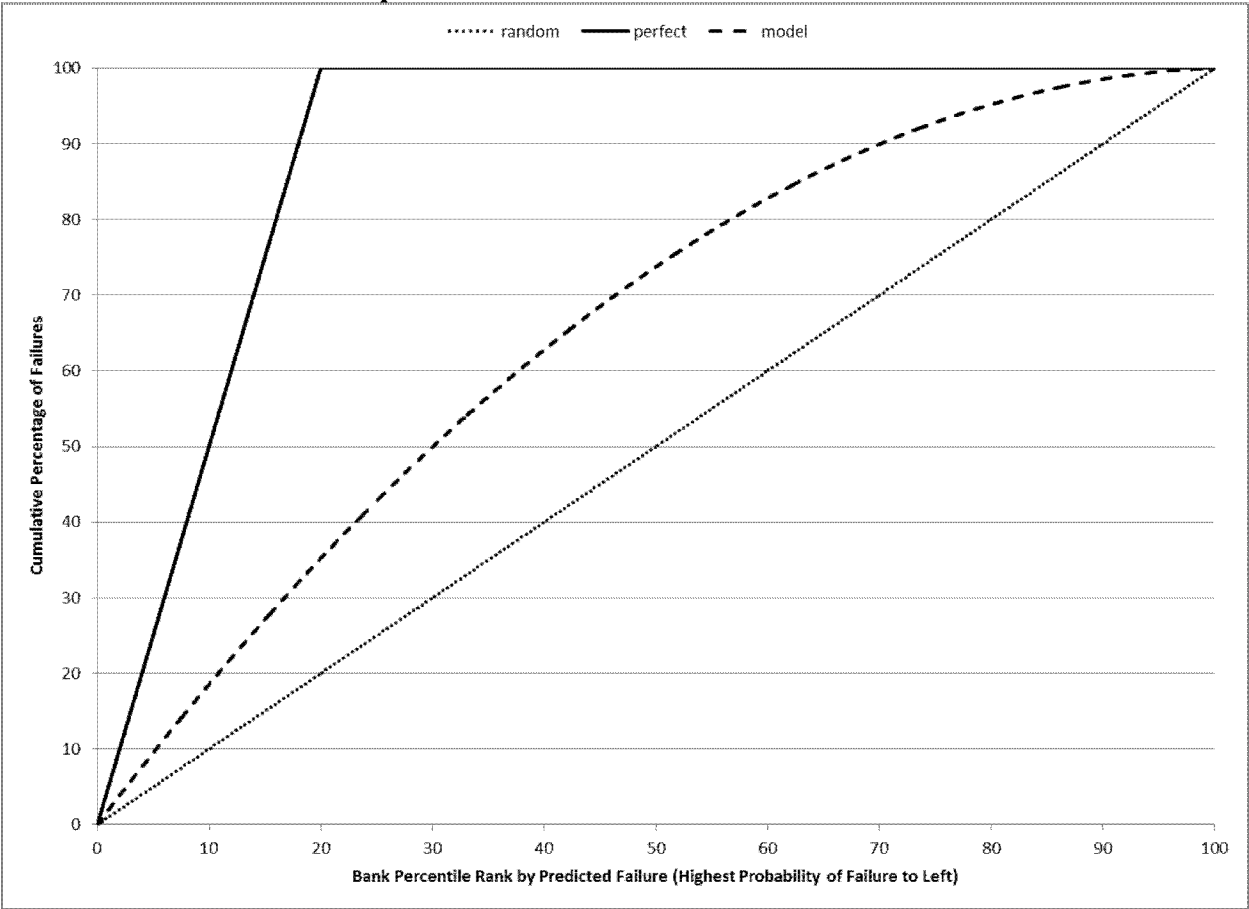

To illustrate the application of CAP curves to the assessment system, Figure 1.3 shows a CAP curve for the current small bank deposit insurance system based on its risk ranking (as reflected in assessment rates) as of 2006 and on failures over the next three years (2007 through 2009). The horizontal axis coordinates for four points on this curve, “IV”, “III”, “II”, and “I Max”, corresponding to the percentage of small banks reported in Column (A) in Table 1.3 below, and the vertical axis coordinates for the points correspond to the percentage of failures contained

within these percentages of small banks, as shown in column (B) in Table 1.3. For example, the point in Figure 1.3 marked “IV” is 0.06 (percentage of small banks in Risk Category IV) on the horizontal axis and 0.65 (percentage of actual failures among small banks in Risk Category IV) on the vertical axis. Similarly, all points to the left of the point marked “III” in Figure 1.3 are Risk Category III and IV rated small banks. The banks along the horizontal axis corresponding to the horizontal axis coordinates between the points “II” and “I Max” represent Risk Category I small

banks that are assessed at the maximum assessment rate for that category. The banks corresponding to the horizontal axis coordinates between the points “I Max” and “I Var” represent Risk Category I small banks that are differentially assessed between the maximum and minimum assessment rates for Risk Category I. (Point “I Var” is not included in Table 1.3.) Banks to the right of the horizontal axis coordinate for the point “I Var” represent Risk Category I small banks that were assessed at the minimum assessment rate.

TABLE 1.3—COMPARISONS OF OUT-OF-SAMPLE PROJECTION OF NEW MODEL TO THE SMALL BANK DEPOSIT INSURANCE ASSESSMENT SYSTEM’S RANKINGS FOR 2006 \*

	(A)	(B)	(C)
	Percentage of Small Banks in Risk Categories (X Percent)	Percentage of actual failures among the X Percent	Percentage of actual failures among riskiest X Percent of banks under the proposal
Risk Category IV .....	0.06	0.65	1.29
Risk Categories IV and III .....	0.66	3.23	6.61
Risk Categories IV, III, and II .....	5.35	14.19	40.00



TABLE 1.3—COMPARISONS OF OUT-OF-SAMPLE PROJECTION OF NEW MODEL TO THE SMALL BANK DEPOSIT INSURANCE ASSESSMENT SYSTEM'S RANKINGS FOR 2006 \*—Continued

	(A)	(B)	(C)
	Percentage of Small Banks in Risk Categories (X Percent)	Percentage of actual failures among the X Percent	Percentage of actual failures among riskiest X Percent of banks under the proposal
Risk Categories IV, III, II, and Max. Rate RC I .....	12.79	34.19	57.42

\* New Model Projections use 2003 as Last Year of Estimation Data.

Where a group of banks along the horizontal axis all have the same risk ranking (that is, where they would all pay the same assessment rate), the CAP curve is constructed as if the failures that occur within this group are uniformly distributed, resulting in a

straight line (shown as two parallel lines in CAP curve). Thus, for example, the 26 failures that occurred among the banks on the horizontal axis to the right of "I Var", which represent the 3,011 Risk Category I small banks that were assessed at the minimum assessment

rate as of the end of 2006, are shown as uniformly distributed among this group (that is, as if each successive bank represented 26/3,011 of a failure). This representation results in the straight line between point "I Var" and the point to the extreme upper right of the curve.

**Figure 1.3 – Cumulative Accuracy Profile for the Small Bank Deposit Insurance Assessment System Based on Its Risk Rankings for 2006**

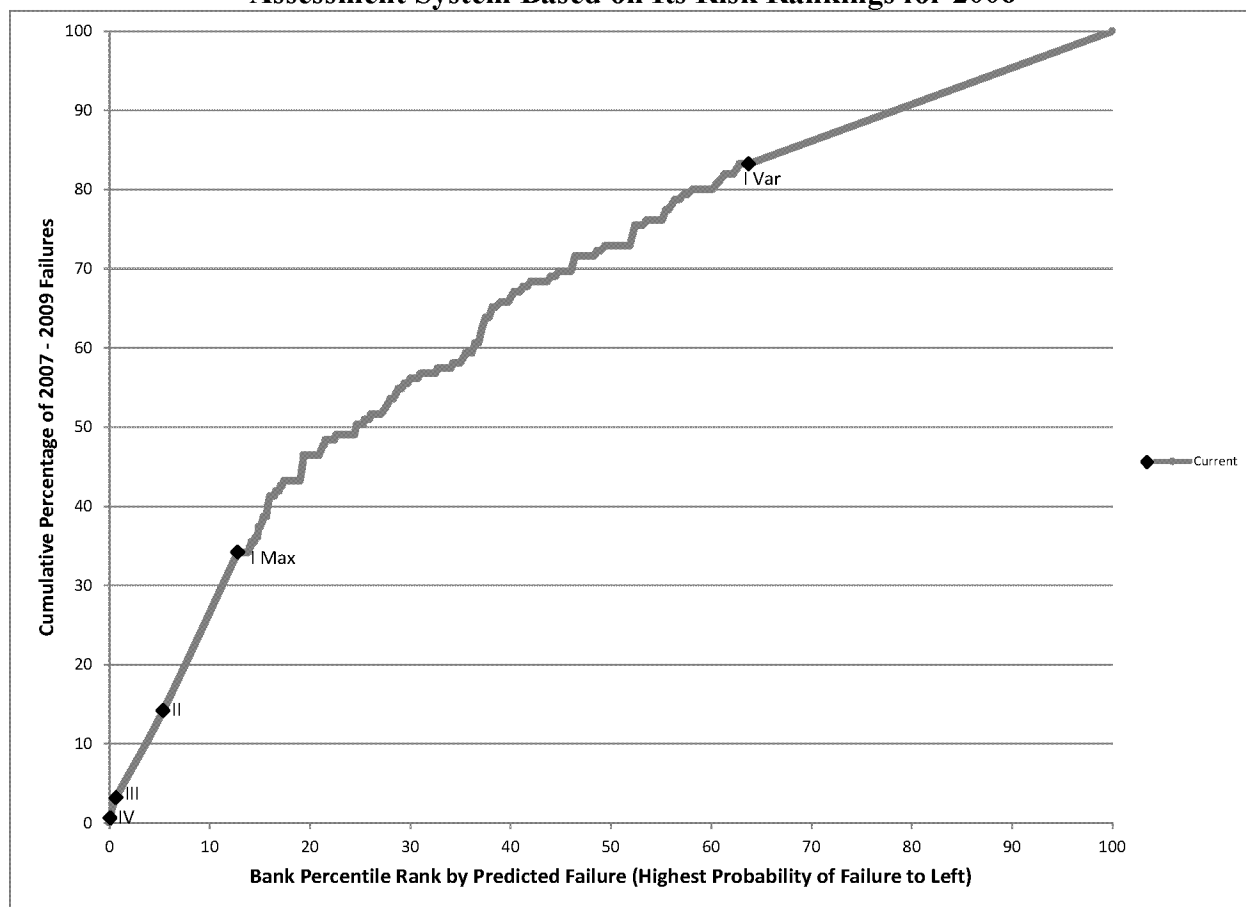


Figure 1.4 shows the same CAP curve as Figure 1.3, but adds a CAP curve based on the proposal's risk ranking (as reflected in assessment rates) as of 2006 and on failures over the next three years

(2007 through 2009).<sup>73</sup> Just as Table 1.3

<sup>73</sup> The horizontal axis shows the risk rank order percentile for each model (the current small bank deposit insurance assessment system and the proposal), but, because the rankings are different under the two models, as a general rule, the bank

implies, the proposal is superior to the current system at all points. The proposal is obviously superior at the

that corresponds to any given point along the horizontal axis is likely to be different from one model to the other.

points marked by “III”, “II”, and “I Max”. The distinction between the point marked by “IV” (for the current small bank deposit insurance system) and the graph for the proposal is difficult to see in the graph, but Table 1.3 shows that the proposal has a vertical value of 1.29 at that point, which is superior to the value of 0.65 for the current small bank deposit insurance system.  
As discussed earlier, for the current small bank deposit insurance assessment system, banks along the horizontal axis corresponding to the horizontal axis coordinates between the points “I Max” and “I Var” represent Risk Category I small banks that are assessed between the maximum and minimum assessment rates for Risk Category I. The proposal is superior in this entire range for 2006.

Figure 1.4 – Cumulative Accuracy Profiles of Proposal vs. the Small Bank Deposit Insurance Assessment System Based on Their Risk Rankings for 2006

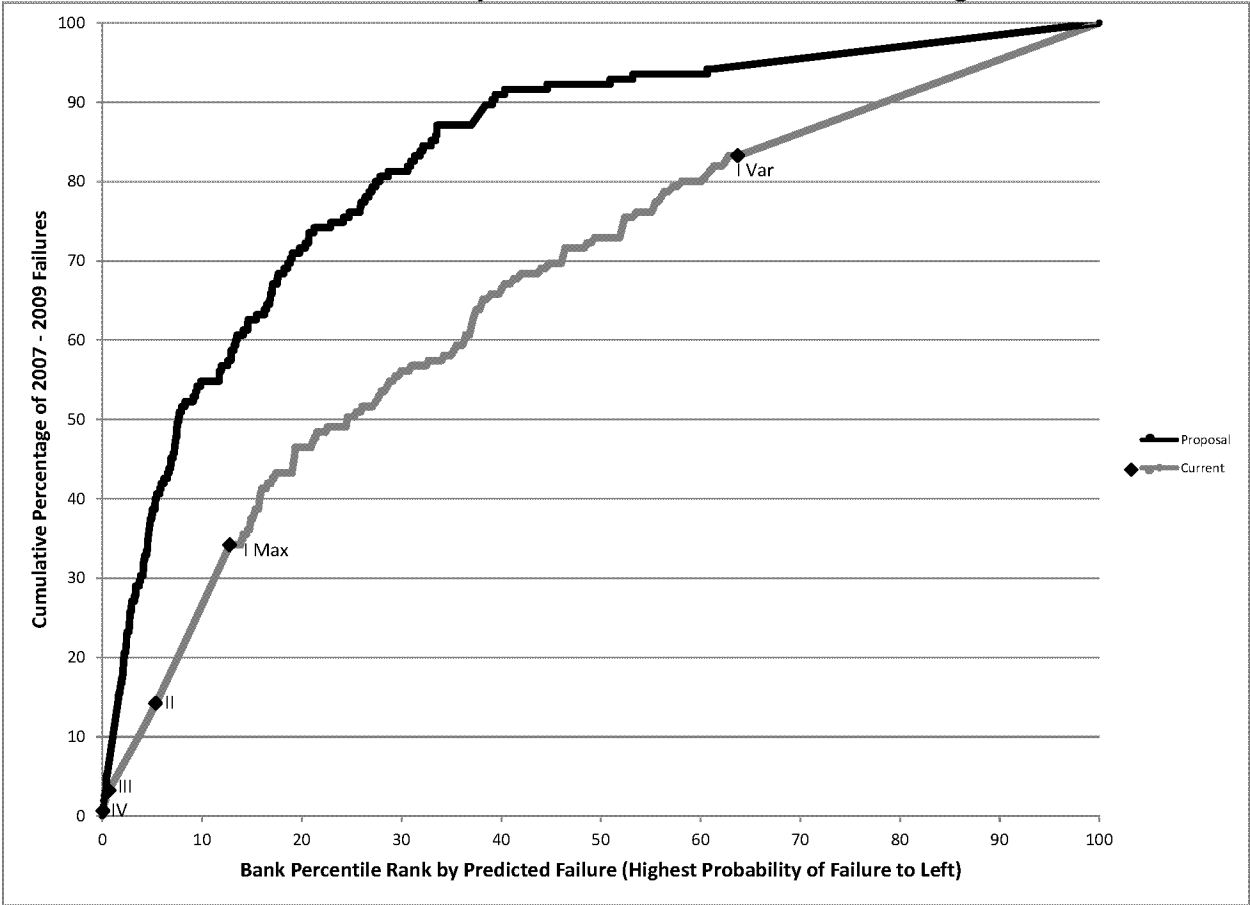


Figure 1.5 shows the same CAP curve based on the proposal’s projections as of 2007 and on failures over the next three years (2008 through 2010). The proposal is superior at all points except “IV” and the points to the left of that point, where the two models yield identical results.

**Figure 1.5 – Cumulative Accuracy Profiles of Proposal vs. the Small Bank Deposit Insurance Assessment System Based on Their Risk Rankings for 2007**

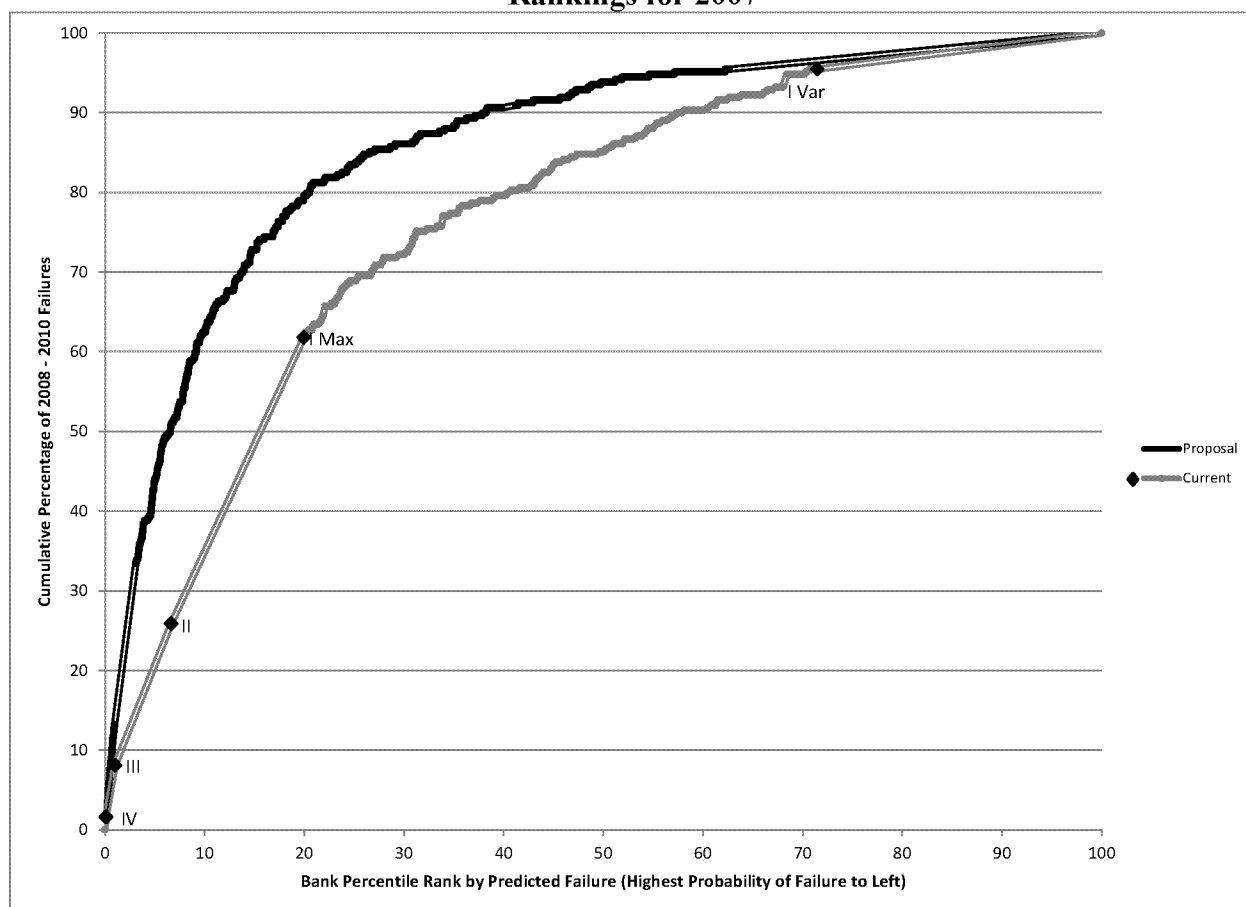


Figure 1.6 shows the same CAP curve based on the proposal's projections as of 2008 and on failures over the next three

years (2009 through 2011). The proposal is superior at most points (especially between "III" and the horizontal-axis

57-percentile level) and is nearly identical to the current model at remaining points.

Figure 1.6 – Cumulative Accuracy Profiles of Proposal vs. the Small Bank Deposit Insurance Assessment System Based on Their Risk Rankings for 2008

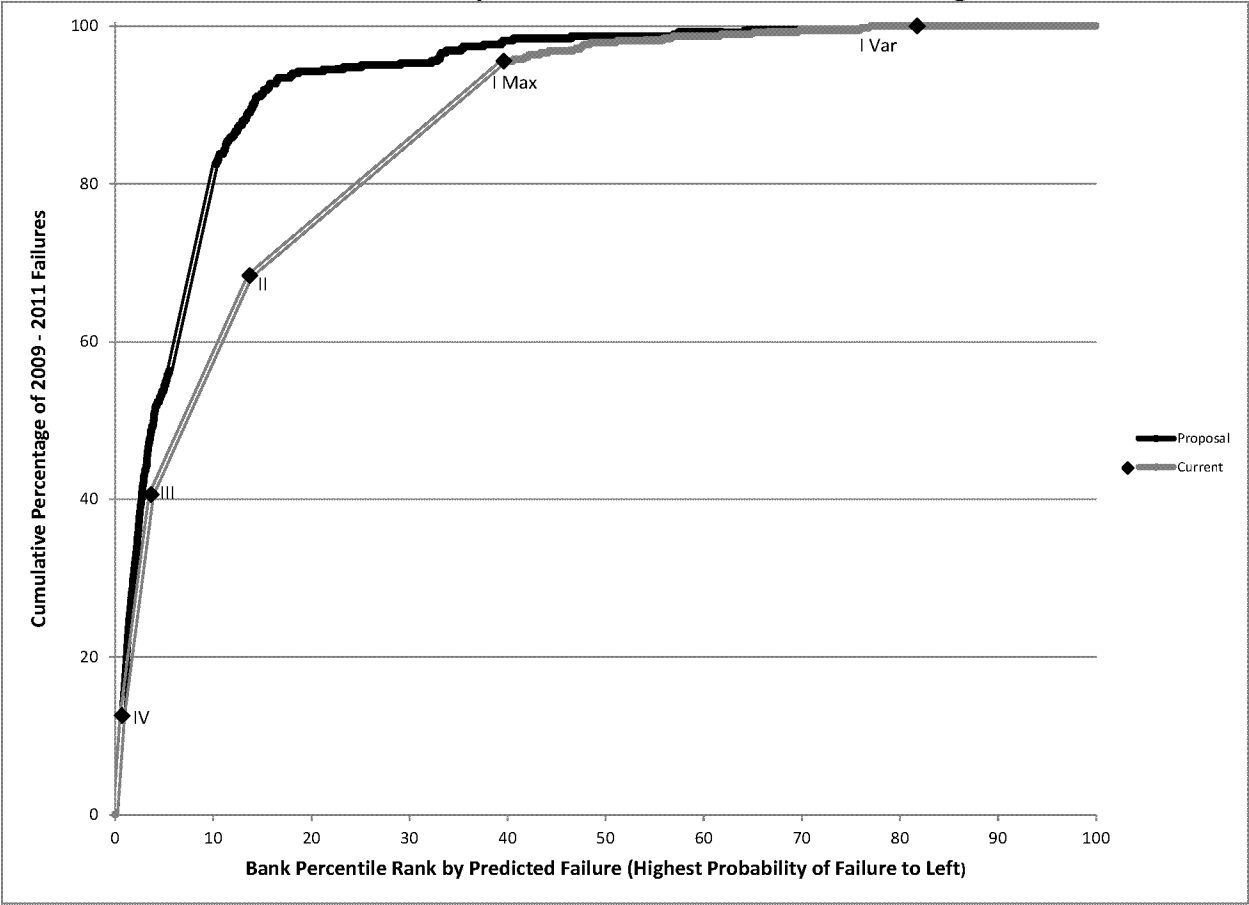


Figure 1.7 shows CAP curves for 2009. (Note that the vertical axis is not zero based.) The proposal is superior at most points and approximately equal to the current model at some points (near IV, and at points to the right of the “X”).

**Figure 1.7 – Cumulative Accuracy Profiles of Proposal vs. the Small Bank Deposit Insurance Assessment System Based on Their Risk Rankings for 2009**


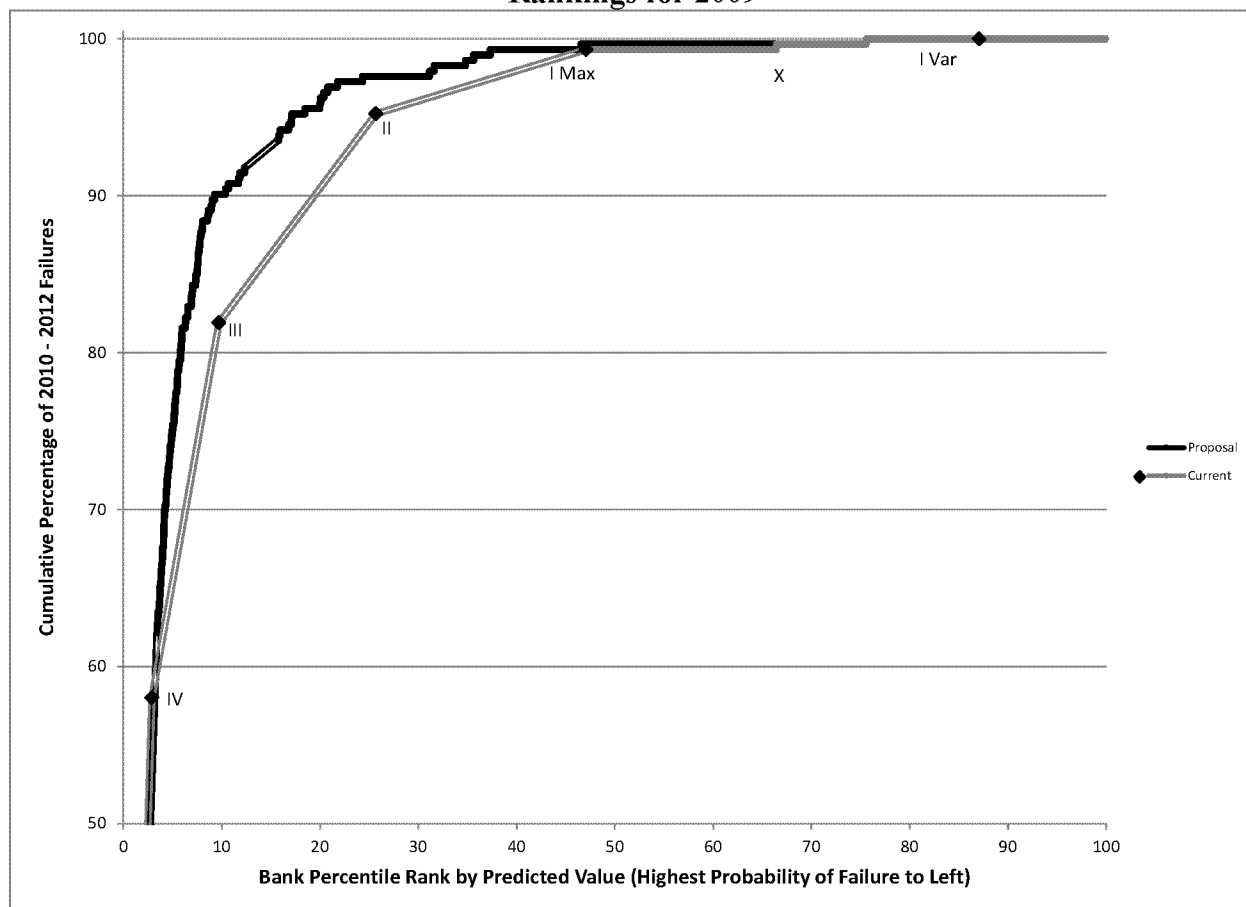


Figure 1.8 shows CAP curves for 2010. When using 2010 data to rank-order small banks based on failure likelihood, the proposal performs worse than the current small bank deposit insurance system for the 2.76 percent of worst-rated small banks (the percentage

of banks in Risk Category IV). Bank failures after 2010 occurred in the earlier part of the three-year horizon (more failures in 2011 than in 2013). In such instances, the current small bank deposit insurance system, which has a one-year forecast horizon, can perform

better than the proposal with a longer forecast horizon. However, the proposal performs better than or as well as the current model for all points to the right of the intersection of the two curves (near the point marked “IV”).

**Figure 1.8 – Cumulative Accuracy Profiles of Proposal vs. the Small Bank Deposit Insurance Assessment System Based on Their Risk Rankings for 2010**

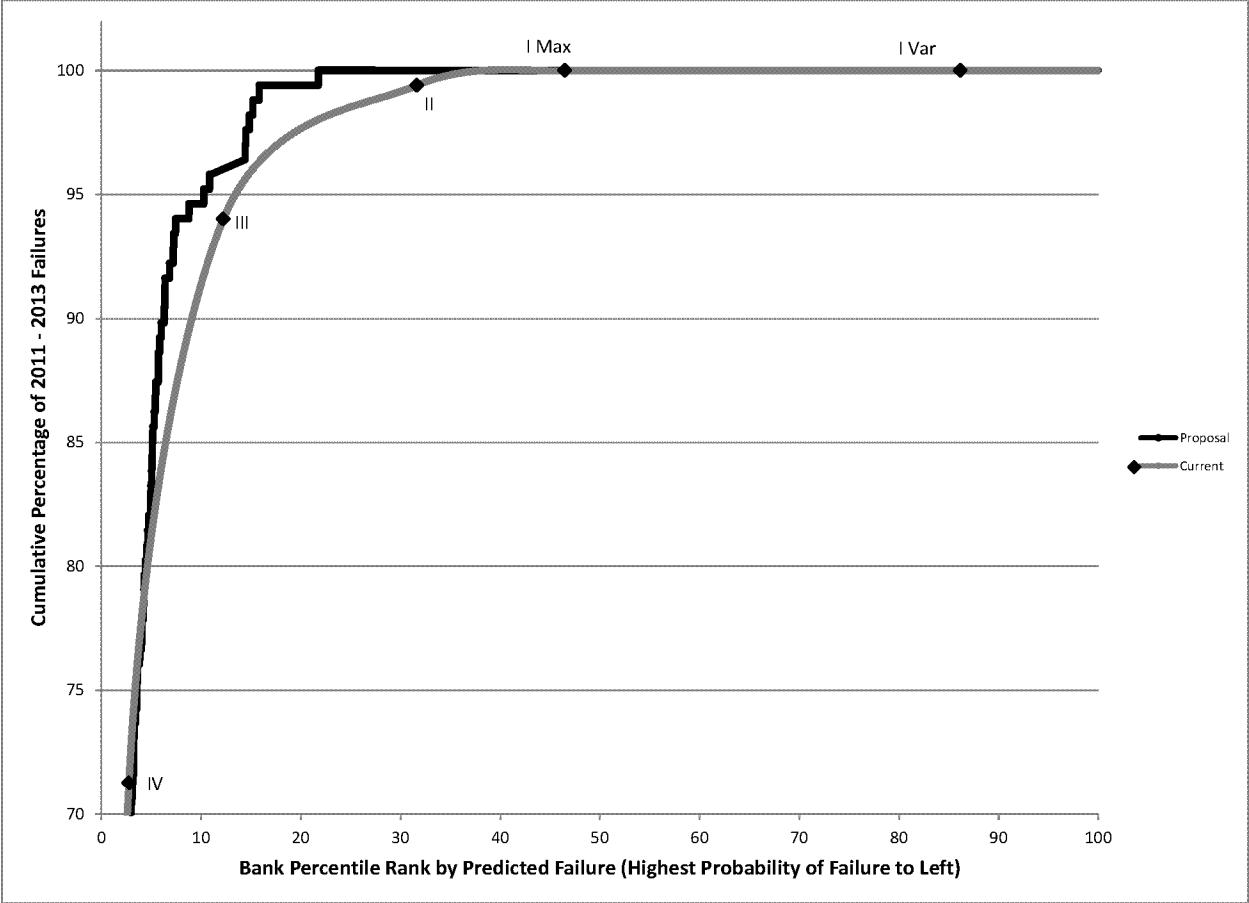


A similar pattern is observed for projections from 2011, in Figure 1.9. The current small bank deposit

insurance system is superior at point IV, as well as a few points from the 51st to 60th percentiles on the horizontal axis.

At all other points, the proposal is superior or equal to the current model.

**Figure 1.9 – Cumulative Accuracy Profiles of Proposal vs. the Small Bank Deposit Insurance Assessment System Based on Their Risk Rankings for 2011**

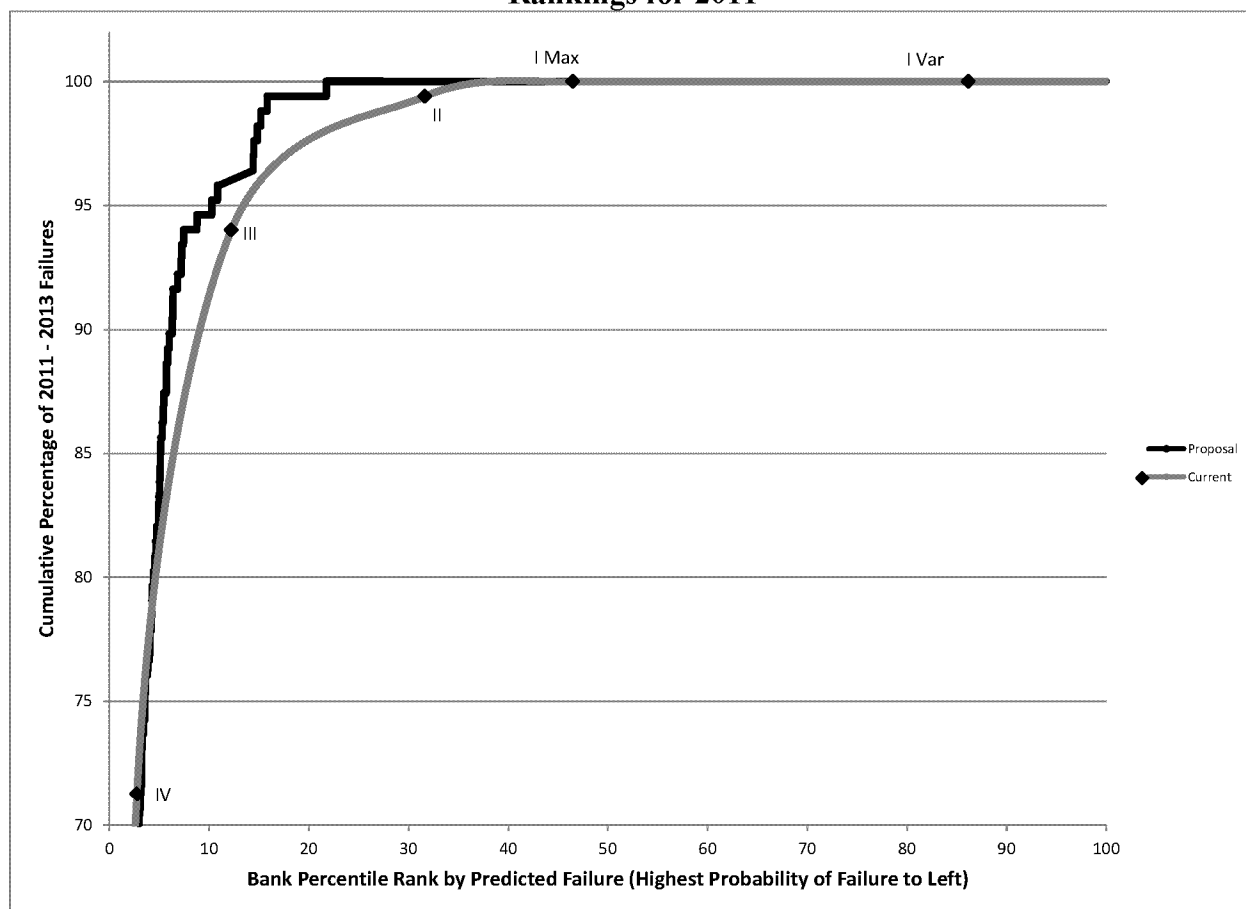

Overall, the proposal is superior to the current small bank deposit insurance system for all years. The superiority of the new model is much stronger for projections from the years 2006, 2007, and 2008 than in the years 2010 and 2011. By 2010, CAMELS ratings largely reflected the weakened condition of many banks. Furthermore, for projections from 2010 and 2011, a large portion of the failures of the subsequent three-year horizon were near term—that is, in the earlier part of the three-year horizon. For projections done from 2006, 2007 and 2008, a larger portion of the actual failures were further out in the three-year horizon. Thus, while CAMELS 4 and 5 ratings can be good predictors of near-term failures, the additional indicators from the new model contribute more to forecasting accuracy when the failures are further out in time.

#### References

- Bennett, Rosalind L. and Haluk Unal (2015). "Understanding the Components of Bank Resolution Costs," *Financial Markets, Institutions, and Instruments* 24:4, forthcoming.
- Clair, Robert T. (1992), "Loan Growth and Loan Quality: Some Preliminary Evidence from Texas Banks," *Economic Review, Federal Reserve Bank of Dallas*, Third Quarter 1992, 9–22.
- Cole, Rebel A., and Jeffery W. Gunther (1995). "Separating the likelihood and timing of bank failure," *Journal of Banking & Finance* 19, 1073–1089.
- Cole, Rebel A., and Jeffery W. Gunther (1998). "Predicting Bank Failures: A Comparison of On- and Off-Site Monitoring Systems," *Journal of Financial Services Research* 13:2, 103–117.
- Collier, Charles, Sean Forbush, Daniel A. Nuxoll, John O'Keefe (2003). "The SCOR System of Off-Site Monitoring: Its Objectives, Functioning, and Performance," *FDIC Banking Review* 15:3, 17–32.
- Duffie, Darrell, Leandro Saita and Ke Wang (2007). "Multi-period corporate default prediction with stochastic covariates," *Journal of Financial Economics* 83(3), 635–665.
- Duffie, Darrell, Andreas Eckner, Guillaume Horel and Leandro Saita (2009). "Frailty Correlated Default," *Journal of Finance* 65(5), 2089–2123.
- FDIC (1998), "Legislation Governing the FDIC's Roles as Insurer and Receiver," from *Managing the Crisis*, <https://www.fdic.gov/bank/historical/managing/history3-A.pdf>.
- Foos, D., L. Norden, and M. Weber (2010) "Loan growth and riskiness of banks," *Journal of Banking and Finance* 34, (12), pp. 2929–2940.
- Gilbert, R. Alton, Andrew P. Meyer, and Mark D. Vaughan (1999). "The Role of Supervisory Screens and Econometric Models in Off-Site Surveillance," *Federal Reserve Bank of St. Louis*, November/December 1999, 31–56.
- Hwa, Vivian, Stefan Jacewitz, and Chiyon Yom (2011). "Bank Growth and Long Term Risk" Keeton, "Does Faster Loan Growth Lead to Higher Loan Losses?," *Economic Review, Federal Reserve Bank of Kansas City*, Second Quarter 1999, 57–75.
- Lane, William R., Stephen W. Looney, and James W. Wansley (1986). "An Application of the Cox Proportional Hazards Model to Bank Failure," *Journal of Banking and Finance* 10, 511–531.
- Logan, Andrew (2001). "The United Kingdom's small banks' crisis of the early 1990s: what were the leading indicators of failure?" *Bank of England Working Paper*, ISSN 1368–5562

- Murphy, S. A. (1995). "Asymptotic Theory for the Frailty Model," *The Annals of Statistics* 23(1), 182–198.
- Onali, Enrico (2012). "Moral hazards, dividends, and risks in banks," Bangor Business School Working Paper BBSWP/11/012, January 2012.
- Salas, Vicente and Jesus Saurina, "Credit Risk in Two Institutional Regimes: Spanish Commercial and Savings Banks," *Journal of Financial Services Research* 22:3, 2002, 203–224.
- Shumway, Tyler (2001). "Forecasting Bankruptcy More Accurately: A Simple Hazard Model," *Journal of Business* 74:1, 101–124.
- Soltila, Heikki and Vesa Vihriala, "Finnish Banks' Problem Assets: Results of Unfortunate Asset Structure or Too Rapid Growth?", *Bank of Finland Discussion Papers* 23/94, 1994.
- Wheelock, David C., and Paul W. Wilson (1995). "Explaining Bank Failures: Deposit Insurance, Regulation, and

- Efficiency," *The Review of Economics and Statistics* 77:4, pages 689–700.
- Wheelock, David C., and Paul W. Wilson (2000). "Why Do Banks Disappear? The Determinants of U.S. Bank Failures and Acquisitions," *The Review of Economics and Statistics* 82:1, 127–138.
- Whalen, Gary (1991). "A Proportional Hazards Model of Bank Failure: An Examination of Its Usefulness as an Early Warning Tool," *Federal Reserve Bank of Cleveland, Economic Review*, 1st Quarter 1991, 21–31.

#### Appendix 1.1—Loan Mix Index

The "Loan Mix Index" provides a measure of the extent to which banks hold higher risk types of assets. This index uses historical charge-off rates to identify loans types with higher risk. For each loan type, a "weighted charge-off rate" (shown in the table below) is

calculated, which is the average charge-off rate for that loan type for each year since 2001 weighted by the number of bank failures in the year. (Thus charge-off rates during crisis years have more weight.) Table 1.1.1 below illustrates how the LMI is calculated for a hypothetical bank. The "weighted charge-off rate" values shown in the table are the same for all banks because they are industry-wide weighted averages. The remaining two columns will vary across banks, depending on the banks' portfolios. For each loan type, the value in the rightmost column is calculated by multiplying the "weighted charge-off rate" by the bank's loans (for that type) as a percent of its total assets. In this illustration, the sum of the right-hand column (84.79) is the LMI for this bank.

TABLE 1.1.1—LOAN MIX INDEX FOR A HYPOTHETICAL BANK <sup>1</sup>

	Weighted charge-off rate percent	Loan category as a percent of hypothetical bank's total assets	Product of two columns to the left
Construction & Development .....	4.50	1.40	6.29
Commercial & Industrial .....	1.60	24.24	38.75
Leases .....	1.50	0.64	0.96
Other Consumer .....	1.46	14.93	21.74
Loans to Foreign Government .....	1.34	0.24	0.32
Real Estate Loans Residual .....	1.02	0.11	0.11
Multifamily Residential .....	0.88	2.42	2.14
Nonfarm Nonresidential .....	0.73	13.71	9.99
1–4 Family Residential .....	0.70	2.27	1.58
Loans to Depository banks .....	0.58	1.15	0.66
Agricultural Real Estate .....	0.24	3.43	0.82
Agriculture .....	0.24	5.91	1.44
SUM (Loan Mix Index) .....	.....	70.45	84.79

Credit card loans are excluded from the list of "loan types. Although credit card loans have high charge-off rates, they tend to also have high interest rates. The LMI also excludes obligations of states and other political subdivisions in the U.S., loans to nondepository financial institutions, and loans classified as "other loans." There is no reported charge-off data for these types of loans.

<sup>1</sup> The table shows industry-wide weighted charge-off percentage rates, the loan category as a percentage of total assets, the products and the sum (the loan mix index) to two decimal places. The final rule will use seven decimal places for industry-wide weighted charge-off percentage rates, and as many decimal places as permitted by the FDIC's computer systems for the loan category as a percentage of total assets and the products. The total (the loan mix index itself) will use three decimal places.

#### Appendix 1.2—Variables Tested

##### Capital

Total equity/Total assets  
Reserves/Total assets  
Reserve coverage ratio = (allowance for loan & lease losses + allocated transfer risk reserve)/(past-due 90 days and non-accrual loans)

##### Asset Quality

Loans past due 30–89/Assets  
Loans past due 90+ days/Assets  
Nonaccrual loans and leases/Assets  
Other real estate owned/Assets  
Nonperforming Loans/Assets = SUM(past dues 90+, nonaccrual loans)/Assets  
Gross loan charge-offs/Assets  
Net loan charge-offs/Assets  
Loan loss provision/Assets  
Loan loss provision/Gross charge-offs  
Change in loan loss provision  
Gross loan charge-offs/(Net income + Provisions of loan losses)

##### Earnings

Income before taxes/Assets  
Interest income  
Interest expense  
Net operating income/Assets  
Net interest income/Assets  
Deposit interest expense/Total deposits  
Earnings volatility: 4-quarter standard deviation of income before taxes, 8-quarter standard deviation of income before taxes

##### Liquidity

Noncore liabilities/Assets  
Loans and Leases/Total deposits  
Liquid assets/Assets

##### Other measures

Loan concentration index  
One-year asset growth rate  
Quartile ranking of one-year asset growth rate  
Retained earnings/Assets  
Cash dividends on capital stock/Net income



Efficiency Ratio = Non-interest expenses / (Interest income + Non-interest income)

#### Supervisory Rating

Weighted average CAMELS component rating  
CAMELS composite rating

### Appendix 2—Analysis of the Projected Effects of the Payment of Assessments on the Capital and Earnings of Insured Depository Institutions

#### I. Introduction

This analysis estimates the effect of the changes in the deposit insurance assessment system and assessment rates in the proposed rule on the equity capital and profitability of banks.<sup>1</sup> The changes considered in the proposed rule affect only established small banks; they do not affect new banks, large banks or insured branches of foreign banks.

This appendix analyzes how the new assessment system under the proposed range of initial base assessment rates of 3 basis points to 30 basis points (P330) could increase or decrease earnings and capital relative to the current initial base assessment rate schedule of 5 basis points to 35 basis points (C535) and relative to the initial base assessment rate schedule of 3 basis points to 30 basis points (C330) that will take effect when the reserve ratio exceeds 1.15 percent under current regulations (*i.e.*, absent adoption of the proposed rule as a final rule). The proposed rule (P330) is intended to maintain approximate revenue neutrality compared to C330.

<sup>1</sup> As it is elsewhere in this NPR, in this appendix, the term “bank” is synonymous with the term “insured depository institution” and the term “established small bank” is synonymous with the term “established small depository institution” as it is used in 12 CFR part 327. In general, an “established small bank” is one that has less than \$10 billion in assets and that has been federally insured for at least five years as of the last day of any quarter for which it is being assessed.

Therefore, for insured established small banks in aggregate, the proposed rule will not affect aggregate earnings and capital compared to C330. Compared to the current system under current assessment rates, however, banks in the aggregate will have higher earnings and capital under the proposal. This analysis focuses on the magnitude of increases or decreases to individual established small banks’ earnings and capital resulting from the proposed rule.

#### II. Assumptions and Data

The analysis assumes that pre-tax income for the next four quarters for each established small bank is equal to income in the fourth quarter of 2014. The analysis also assumes that the effects of changes in assessments are not transferred to customers in the form of changes in borrowing rates, deposit rates, or service fees. Since deposit insurance assessments are a tax-deductible operating expense, increases in the assessment expense can lower taxable income and decreases in the assessment expense can increase taxable income. Therefore, the analysis considers the effective after-tax cost of assessments in calculating the effect on capital.

The effect of the change in assessments on an established small bank’s income is measured by the change in deposit insurance assessments as a percent of income before assessments, taxes, and extraordinary items (hereafter referred to as “income”). This income measure is used in order to eliminate the potentially transitory effects of extraordinary items and taxes on profitability. In order to facilitate a comparison of the impact of assessment changes, established small banks were assigned to one of two groups: those that were profitable and those that were unprofitable for the year ending

December 31, 2014. For this analysis, data as of December 31, 2014 are used to calculate each bank’s assessment base and risk-based assessment rate. The base and rate are assumed to remain constant throughout the one year projection period. An established small bank’s earnings retention and dividend policies also influence the extent to which assessments affect equity levels. If an established small bank maintains the same *dollar* amount of dividends when it pays a higher deposit insurance assessment under the proposed rule, equity (retained earnings) will be less by the full amount of the after-tax cost of the increase in the assessment. This analysis instead assumes that an established small bank will maintain its dividend *rate* (that is, dividends as a fraction of net income) unchanged from the weighted average rate reported over the four quarters ending December 31, 2014.

#### III. Projected Effects on Capital and Earnings Assuming a Range of Assessment Rates under the Current Established Small Bank Deposit Insurance Assessment System of 5 Basis Points to 35 Basis Points and under the Proposed System of 3 Basis Points to 30 Basis Points (Assessment Change P330–C535)

Under this scenario, no established small banks facing an increase in assessments would, as a result of the assessment increase, fall below a 4 percent or 2 percent leverage ratio. Two established small banks facing a decrease in assessments would, as a result of the decrease, have their leverage ratio rise above the 4 percent threshold. No established small banks facing a decrease in assessments would, as a result of the assessment decrease, have their leverage ratio rise above the 2 percent threshold.

Table 2.1 shows that approximately 83 percent of profitable established small banks are projected to have a decrease in assessments in an amount between 0 and 10 percent of income.

Another 9 percent of profitable established small banks would have a reduction in assessments exceeding 10 percent of their income. 453 profitable established small banks would have an

increase in assessments, with all but 7 of them facing assessment increases between 0 and 10 percent of their income.

Table 2.1 – Effect of the Proposal on Income for Profitable Established Small Banks  
(P330 compared to C535)

Change in Assessments Relative to Income	INSTITUTIONS		ASSETS	
	Number	Percent of Total Profitable Established Small Banks	Assets (\$ billions)	Percent of Total Assets of Profitable Established Small Banks
Decrease over 40%	125	2	21	1
Decrease 20% to 40%	108	2	25	1
Decrease 10% to 20%	312	5	75	3
Decrease 5% to 10%	663	11	179	6
Decrease 0% to 5%	4,317	72	2,101	74
No Change	2	0	1	0
Increase 0% to 5%	432	7	430	15
Increase 5% to 10%	14	0	16	1
Increase 10% to 20%	3	0	1	0
Increase 20% to 40%	2	0	1	0
Increase over 40%	2	0	1	0
All	5,982	100	2,849	100

Table 2.2 provides the same analysis for established small banks that were unprofitable during the year ending December 31, 2014. Table 2.2 shows that about 51 percent of unprofitable

established small banks are projected to have a decrease in assessments in an amount between 0 and 10 percent of their losses. Another 43 percent will have lower assessments in amounts

exceeding 10 percent income. Only 25 unprofitable banks will face assessment increases, all but 2 of them in amounts between 0 and 10 percent of losses.

Table 2.2 – Effect of the Proposal on Income for Unprofitable Established Small Banks

(P330 compared to C535)

Change in Assessment Relative to Losses	INSTITUTIONS		ASSETS	
	Number	Percent of Total Unprofitable Established Small Banks	Assets (\$ billions)	Percent of Total Assets of Unprofitable Established Small Banks
Decrease over 40%	55	13	8	8
Decrease 20% to 40%	49	12	7	7
Decrease 10% to 20%	74	18	14	14
Decrease 5% to 10%	80	20	27	28
Decrease 0% to 5%	126	31	32	33
No Change	1	0	0	0
Increase 0% to 5%	20	5	8	8
Increase 5% to 10%	3	1	0	0
Increase 10% to 20%	1	0	0	0
Increase 20% to 40%	0	0	0	0
Increase over 40%	1	0	0	0
All	410	100	96	100

**IV. Projected Effects on Capital and Earnings Assuming a Range of Initial Base Assessment Rates Under Both the Current Established Small Bank Deposit Insurance Assessment System and the Proposed System of 3 Basis Points to 30 Basis Points (P330–C330)**

Under this scenario, no established small banks facing an increase in

assessments would, as a result of the assessment increase, fall below a 4 percent or 2 percent leverage ratio. One established small bank facing a decrease in assessments would, as a result of the assessment decrease, have its leverage ratio rise above the 4 percent threshold.

Table 2.3 shows that approximately 54 percent of profitable established small banks are projected to have a

decrease in assessments in an amount between 0 and 10 percent of income. Another 4 percent of profitable established small banks would have a reduction in assessments exceeding 10 percent of their income. 1,211 profitable established small banks would have an increase in assessments, with all but 27 facing assessment increases between 0 and 10 percent of their income.

Table 2.3 – Effect of the Proposal on Income for Profitable Established Small Banks  
(P330 compared to C330)

Change in Assessments Relative to Income	INSTITUTIONS		ASSETS	
	Number	Percent of Total Profitable Established Small Banks	Assets (\$ billions)	Percent of Total Assets of Profitable Established Small Banks
Decrease over 40%	69	1	11	0
Decrease 20% to 40%	69	1	18	1
Decrease 10% to 20%	145	2	29	1
Decrease 5% to 10%	333	6	85	3
Decrease 0% to 5%	2,849	48	1,097	38
No Change	1,306	22	459	16
Increase 0% to 5%	1,115	19	1,070	38
Increase 5% to 10%	69	1	61	2
Increase 10% to 20%	11	0	15	1
Increase 20% to 40%	7	0	2	0
Increase over 40%	9	0	2	0
All	5,982	100	2,849	100

Table 2.4 provides the same analysis for established small banks that were unprofitable during the year ending December 31, 2014. Table 2.4 shows that about 57 percent of unprofitable

established small banks are projected to have a decrease in assessments in an amount between 0 and 10 percent of their losses. Another 27 percent will have lower assessments in amounts

exceeding 10 percent of their losses. Only 59 unprofitable banks will face assessment increases, all but 6 of them in amounts between 0 and 10 percent of losses.

Table 2.4 – Effect of the Proposal on Income for Unprofitable Established Small Banks  
(P330 compared to C330)

Change in Assessments Relative to Losses	INSTITUTIONS		ASSETS	
	Number	Percent of Total Unprofitable Established Small Banks	Assets (\$ billions)	Percent of Total Assets of Unprofitable Established Small Banks
Decrease over 40%	34	8	5	5
Decrease 20% to 40%	30	7	5	5
Decrease 10% to 20%	48	12	6	7
Decrease 5% to 10%	62	15	13	13
Decrease 0% to 5%	172	42	47	49
No Change	5	1	7	7
Increase 0% to 5%	44	11	6	6
Increase 5% to 10%	9	2	7	7
Increase 10% to 20%	2	0	0	0
Increase 20% to 40%	1	0	0	0
Increase over 40%	3	1	0	0
All	410	100	96	100

## X. Revisions to Code of Federal Regulations

### List of subjects in 12 CFR Part 327.

Bank deposit insurance, Banks, Savings Associations.

For the reasons set forth above, the FDIC proposes to amend part 327 as follows:

### PART 327—ASSESSMENTS

- 1. The authority for 12 CFR part 327 continues to read as follows:

**Authority:** 12 U.S.C. 1441, 1813, 1815, 1817–19, 1821.

#### § 327.3 [Amended]

- 2. Amend § 327.3, in paragraph (b), by removing “§§ 327.4(a) and 327.9” and adding its place “§ 327.4(a) and § 327.9 or § 327.16”.

#### § 327.4 [Amended]

- 3. Amend § 327.4:

- a. In paragraph (a), by removing “§ 327.9” and adding in its place “§ 327.9 or § 327.16”.

- b. In paragraph (c), by removing “§ 327.9(e)(3)” and adding in its place “§§ 327.9(f)(3) and 327.16 (f)(3)”.

- 4. Amend § 327.8:

- a. In paragraph (e) and (f), by removing “§ 327.9(e)” and adding in its place “§§ 327.9(f) and 327.16 (f)”.

- b. In paragraph (k)(1), by removing “§ 327.9(f)(3) and (4)” and adding in its place “§§ 327.9(g)(3) and (4) and 327.16 (f)(3) and (4)”.

- c. By revising paragraph (l).

- d. In paragraphs (m), (n), (o), and (p), by removing “§ 327.9(d)(1)” and adding in its place “§§ 327.9(e)(1) and 327.16(e)(1)” and removing “§ 327.9(d)(2)” and adding in its place “§§ 327.9(e)(2) and 327.16(e)(2).”

- e. By adding paragraphs (v) through (z).

The revision and additions read as follows:

#### § 327.8 Definitions.

\* \* \* \* \*

(l) *Risk assignment.* Under § 327.9, for all small institutions and insured branches of foreign banks, risk assignment include assignment to Risk Category I, II, III, or IV and, within Risk Category I, assignment to an assessment rate. Under § 327.16, for all new small institutions and insured branches of foreign banks, risk assignment includes assignment to Risk Category I, II, III, or IV, and for insured branches of foreign banks within Risk Category I, assignment to an assessment rate or rates. For all established small institutions, large institutions and highly complex institutions, risk assignment includes assignment to an assessment rate.

\* \* \* \* \*

(v) *Established small institution.*—An established small institution is a “small institution” as defined under paragraph (e) of this section that meets the definition of “established depository

institution” under paragraph (k) of this section.

(w) *New small institution*—A new small institution is a “small institution” as defined under paragraph (e) of this section that meets the definition of “new depository institution” under paragraph (j) of this section.

(y) *Deposit Insurance Fund and DIF*—the Deposit Insurance Fund established pursuant to 12 U.S.C. 1813(y)(1).

(z) *Reserve ratio of the DIF*—the reserve ratio as defined in 12 U.S.C. 1813(y)(3).

■ 5. Amend § 327.9 by adding introductory text to read as follows:

**§ 327.9 Assessment pricing methods.**

The following pricing methods shall apply through the calendar quarter in which the reserve ratio of the DIF reaches 1.15 percent for the first time after June 30, 2015.

\* \* \* \* \*

■ 6. Add § 327.16 to read as follows:

**§ 327.16 Assessment pricing methods—beginning the first calendar quarter after the calendar quarter in which the reserve ratio of the DIF reaches 1.15 percent.**

(a) *Established small institutions.* Beginning the first calendar quarter after

June 30, 2015 in which the reserve ratio of the DIF reached or exceeded 1.15 percent in the previous calendar quarter, an established small institution shall have its initial base assessment rate determined by using the financial ratios methods set forth in paragraph (a)(1) of this section.

(1) Under the financial ratios method, each of seven financial ratios and a weighted average of CAMELS component ratings will be multiplied by a corresponding pricing multiplier. The sum of these products will be added to a uniform amount. The resulting sum shall equal the institution’s initial base assessment rate; provided, however, that no institution’s initial base assessment rate shall be less than the minimum initial base assessment rate in effect for established small institutions with a particular CAMELS component rating for that quarter nor greater than the maximum initial base assessment rate in effect for established small institutions with a particular CAMELS component rating for that quarter. An institution’s initial base assessment rate, subject to adjustment pursuant to paragraphs (e)(1), (2), and (3) of this section, as appropriate (resulting in the institution’s total base assessment rate,

which in no case can be lower than 50 percent of the institution’s initial base assessment rate), and adjusted for the actual assessment rates set by the Board under § 327.10(g), will equal an institution’s assessment rate. The seven financial ratios are: Tier 1 Leverage Ratio (%); Net Income before Taxes/Total Assets (%); Nonperforming Loans and Leases/Gross Assets (%); Other Real Estate Owned/Gross Assets (%); Core Deposits/Total Assets (%); One Year Asset Growth (%); and Loan Mix Index. The ratios are defined in Table A.1 of Appendix A to this subpart. The ratios will be determined for an assessment period based upon information contained in an institution’s report of condition filed as of the last day of the assessment period as set out in paragraph (a)(2) of this section. The weighted average of CAMELS component ratings is created by multiplying each component by the following percentages and adding the products: Capital adequacy—25%, Asset quality—20%, Management—25%, Earnings—10%, Liquidity—10%, and Sensitivity to market risk—10%. The following table sets forth the initial values of the pricing multipliers:

Risk measures *	Pricing multipliers **
Tier 1 Leverage ratio .....	[ ]
Net Income before Taxes/Total Assets .....	[ ]
Nonperforming Loans and Leases/Gross Assets .....	[ ]
Other Real Estate Owned/Gross Assets .....	[ ]
Core Deposits/Total Assets .....	[ ]
One Year Asset Growth .....	[ ]
Loan Mix Index .....	[ ]
Weighted Average CAMELS Component Rating .....	[ ]

\* Ratios are expressed as percentages.

\*\* Multipliers are rounded to three decimal places.

(i) The seven financial ratios and the weighted average CAMELS component rating will be multiplied by the respective pricing multiplier, and the products will be summed. To this result will be added the uniform amount. The resulting sum shall equal the institution’s initial base assessment rate; provided, however, that no institution’s initial base assessment rate shall be less than the minimum initial base assessment rate in effect for the applicable CAMELS composite grouping set out in § 327.10 for that quarter nor greater than the maximum initial base assessment rate in effect for the applicable CAMELS composite grouping set out in § 327.10 for that quarter.

(ii) Uniform amount and pricing multipliers. Except as adjusted for the actual assessment rates set by the Board

under § 327.10(f), the uniform amount shall be:

(A) \_\_\_\_\_ whenever the assessment rate schedule set forth in § 327.10(b) is in effect;

(C) \_\_\_\_\_ whenever the assessment rate schedule set forth in § 327.10(c) is in effect; or

(D) \_\_\_\_\_ whenever the assessment rate schedule set forth in § 327.10(d) is in effect.

(iii) *Implementation of CAMELS rating changes*—(A) *Composite rating change.* If, during a quarter, a CAMELS composite rating change occurs in a way that changes the institution’s initial base assessment rate, then the institution’s initial base assessment rate for the portion of the quarter prior to the change shall be determined using the assessment schedule for the appropriate CAMELS composite rating in effect

before the change, including any minimum or maximum initial base assessment rates, and subject to adjustment pursuant to paragraphs (e)(1) through (3) of this section, as appropriate, and adjusted for actual assessment rates set by the Board under § 327.10(f). For the portion of the quarter after the CAMELS composite rating change, the institution’s initial base assessment rate shall be determined using the assessment schedule for the applicable CAMELS composite rating in effect, including any minimum or maximum initial base assessment rates, and subject to adjustment pursuant to paragraphs (e)(1) through (3) of this section, as appropriate, and adjusted for actual assessment rates set by the Board under § 327.10(f).

(B) *Component ratings changes.* If, during a quarter, a CAMELS component rating change occurs in a way that changes the institution's initial base assessment rate, the initial base assessment rate for the period before the change shall be determined under the financial ratios method using the CAMELS component ratings in effect before the change, subject to adjustment under paragraphs (e)(1) through (3) of this section, as appropriate. Beginning on the date of the CAMELS component rating change, the initial base assessment rate for the remainder of the quarter shall be determined under the

financial ratios method using the CAMELS component ratings in effect after the change, again subject to adjustment under paragraphs (e)(1) through (3), as appropriate.

(2) *Applicable reports of condition.* The financial ratios used to determine the assessment rate for an established small institution shall be based upon information contained in an institution's Consolidated Reports of Condition and Income or Thrift Financial Report (or successor report, as appropriate) dated as of March 31 for the assessment period beginning the preceding January 1; dated as of June 30

for the assessment period beginning the preceding April 1; dated as of September 30 for the assessment period beginning the preceding July 1; and dated as of December 31 for the assessment period beginning the preceding October 1.

(b) *Large and Highly Complex institutions—(1) Assessment scorecard for large institutions (other than highly complex institutions).* (i) A large institution other than a highly complex institution shall have its initial base assessment rate determined using the scorecard for large institutions.

#### SCORECARD FOR LARGE INSTITUTIONS

	Scorecard measures and components	Measure weights (percent)	Component weights (percent)
P .....	Performance Score .....		
P.1 ..	Weighted Average CAMELS Rating .....	100	30
P.2 ..	Ability to Withstand Asset-Related Stress .....		50
	Leverage ratio .....	10	
	Concentration Measure .....	35	
	Core Earnings/Average Quarter-End Total Assets* .....	20	
	Credit Quality Measure .....	35	
P.3 ..	Ability to Withstand Funding-Related Stress .....		20
	Core Deposits/Total Liabilities .....	60	
	Balance Sheet Liquidity Ratio .....	40	
L .....	Loss Severity Score .....		
L.1 ...	Loss Severity Measure .....		100

\* Average of five quarter-end total assets (most recent and four prior quarters).

(ii) The scorecard for large institutions produces two scores: performance score and loss severity score.

(A) Performance score for large institutions. The performance score for large institutions is a weighted average of the scores for three measures: the weighted average CAMELS rating score, weighted at 30 percent; the ability to withstand asset-related stress score, weighted at 50 percent; and the ability to withstand funding-related stress score, weighted at 20 percent.

(1) *Weighted average CAMELS rating score.* (i) To compute the weighted average CAMELS rating score, a weighted average of an institution's CAMELS component ratings is calculated using the following weights:

CAMELS component	Weight (percent)
C .....	25
A .....	20
M .....	25
E .....	10
L .....	10
S .....	10

(ii) A weighted average CAMELS rating converts to a score that ranges from 25 to 100. A weighted average rating of 1 equals a score of 25 and a weighted average of 3.5 or greater equals a score of 100. Weighted average CAMELS ratings between 1 and 3.5 are assigned a score between 25 and 100. The score increases at an increasing rate as the weighted average CAMELS rating increases. Appendix B of this subpart describes the conversion of a weighted average CAMELS rating to a score.

(2) *Ability to withstand asset-related stress score.* (i) The ability to withstand asset-related stress score is a weighted average of the scores for four measures: Leverage ratio; concentration measure; the ratio of core earnings to average quarter-end total assets; and the credit quality measure. Appendices A and C of this subpart define these measures.

(ii) The Leverage ratio and the ratio of core earnings to average quarter-end total assets are described in appendix A and the method of calculating the scores is described in appendix C of this subpart.

(iii) The score for the concentration measure is the greater of the higher-risk assets to Tier 1 capital and reserves score or the growth-adjusted portfolio concentrations score. Both ratios are described in appendix C.

(iv) The score for the credit quality measure is the greater of the criticized and classified items to Tier 1 capital and reserves score or the underperforming assets to Tier 1 capital and reserves score.

(v) The following table shows the cutoff values and weights for the measures used to calculate the ability to withstand asset-related stress score. Appendix B of this subpart describes how each measure is converted to a score between 0 and 100 based upon the minimum and maximum cutoff values, where a score of 0 reflects the lowest risk and a score of 100 reflects the highest risk.

## CUTOFF VALUES AND WEIGHTS FOR MEASURES TO CALCULATE ABILITY TO WITHSTAND ASSET-RELATED STRESS SCORE

Measures of the ability to withstand asset-related stress	Cutoff values		Weights (percent)
	Minimum (percent)	Maximum (percent)	
Leverage ratio .....	6	13	10
Concentration Measure .....			35
Higher-Risk Assets to Tier 1 Capital and Reserves; or .....	0	135	
Growth-Adjusted Portfolio Concentrations .....	4	56	
Core Earnings/Average Quarter-End Total Assets* .....	0	2	20
Credit Quality Measure .....			35
Criticized and Classified Items/Tier 1 Capital and Reserves; or .....	7	100	
Underperforming Assets/Tier 1 Capital and Reserves .....	2	35	

\* Average of five quarter-end total assets (most recent and four prior quarters).

(vi) The score for each measure in the table in paragraph (b)(1)(ii)(A)(2)(v) is multiplied by its respective weight and the resulting weighted score is summed to arrive at the score for an ability to withstand asset-related stress, which can range from 0 to 100, where a score of 0 reflects the lowest risk and a score of 100 reflects the highest risk.

(3) Ability to withstand funding-related stress score. Two measures are used to compute the ability to withstand funding-related stress score: a core deposits to total liabilities ratio, and a balance sheet liquidity ratio. Appendix A of this subpart describes these measures. Appendix B of this subpart describes how these measures are converted to a score between 0 and 100,

where a score of 0 reflects the lowest risk and a score of 100 reflects the highest risk. The ability to withstand funding-related stress score is the weighted average of the scores for the two measures. In the following table, cutoff values and weights are used to derive an institution's ability to withstand funding-related stress score:

## CUTOFF VALUES AND WEIGHTS TO CALCULATE ABILITY TO WITHSTAND FUNDING-RELATED STRESS SCORE

Measures of the ability to withstand funding-related stress	Cutoff values		Weights (percent)
	Minimum (percent)	Maximum (percent)	
Core Deposits/Total Liabilities .....	5	87	60
Balance Sheet Liquidity Ratio .....	7	243	40

(4) Calculation of Performance Score. In paragraph (b)(1)(ii)(A)(3), the scores for the weighted average CAMELS rating, the ability to withstand asset-related stress, and the ability to withstand funding-related stress are multiplied by their respective weights (30 percent, 50 percent and 20 percent, respectively) and the results are

summed to arrive at the performance score. The performance score cannot be less than 0 or more than 100, where a score of 0 reflects the lowest risk and a score of 100 reflects the highest risk.

(B) *Loss severity score.* The loss severity score is based on a loss severity measure that is described in appendix D of this subpart. Appendix B also

describes how the loss severity measure is converted to a score between 0 and 100. The loss severity score cannot be less than 0 or more than 100, where a score of 0 reflects the lowest risk and a score of 100 reflects the highest risk. Cutoff values for the loss severity measure are:

## CUTOFF VALUES TO CALCULATE LOSS SEVERITY SCORE

Measure of loss severity	Cutoff values	
	Minimum (percent)	Maximum (percent)
Loss Severity .....	0	28

(C) *Total score.* (1) The performance and loss severity scores are combined to produce a total score. The loss severity score is converted into a loss severity factor that ranges from 0.8 (score of 5 or lower) to 1.2 (score of 85 or higher). Scores at or below the minimum cutoff of 5 receive a loss severity factor of 0.8, and scores at or above the maximum cutoff of 85 receive a loss severity factor of 1.2. The following linear

interpolation converts loss severity scores between the cutoffs into a loss severity factor:

$$(\text{Loss Severity Factor} = 0.8 + [0.005 * (\text{Loss Severity Score} - 5)]).$$

(2) The performance score is multiplied by the loss severity factor to produce a total score (total score = performance score \* loss severity factor). The total score can be up to 20 percent higher or lower than the

performance score but cannot be less than 30 or more than 90. The total score is subject to adjustment, up or down, by a maximum of 15 points, as set forth in paragraph (b)(3) of this section. The resulting total score after adjustment cannot be less than 30 or more than 90.

(D) *Initial base assessment rate.* A large institution with a total score of 30 pays the minimum initial base assessment rate and an institution with



a total score of 90 pays the maximum initial base assessment rate. For total scores between 30 and 90, initial base

assessment rates rise at an increasing rate as the total score increases,

calculated according to the following formula:

$$\text{Rate} = \text{Minimum Rate} + \left[ \left( \left( 1.4245 \times \left( \frac{\text{Score}}{100} \right)^4 \right) - 0.0385 \right) \times (\text{Maximum Rate} - \text{Minimum Rate}) \right]$$

where Rate is the initial base assessment rate (expressed in basis points), Maximum Rate is the maximum initial base assessment rate then in effect (expressed in basis points), and Minimum Rate is the minimum initial base assessment rate then in effect (expressed in basis points). Initial base assessment rates are subject to

adjustment pursuant to paragraphs (b)(3), (e)(1), (e)(2), of this section; large institutions that are not well capitalized or have a CAMELS composite rating of 3, 4 or 5 shall be subject to the adjustment at paragraph (e)(3) of this section; these adjustments shall result in the institution's total base assessment rate, which in no case can be lower than

50 percent of the institution's initial base assessment rate.

(2) *Assessment scorecard for highly complex institutions.* (i) A highly complex institution shall have its initial base assessment rate determined using the scorecard for highly complex institutions.

#### SCORECARD FOR HIGHLY COMPLEX INSTITUTIONS

	Measures and components	Measure weights (percent)	Component weights (percent)
P .....	Performance Score .....		
P.1 ..	Weighted Average CAMELS Rating .....	100	30
P.2 ..	Ability To Withstand Asset-Related Stress .....		50
	Leverage ratio .....	10	
	Concentration Measure .....	35	
	Core Earnings/Average Quarter-End Total Assets .....	20	
	Credit Quality Measure and Market Risk Measure .....	35	
P.3 ..	Ability To Withstand Funding-Related Stress .....		20
	Core Deposits/Total Liabilities .....	50	
	Balance Sheet Liquidity Ratio .....	30	
	Average Short-Term Funding/Average Total Assets .....	20	
L .....	Loss Severity Score .....		
L.1 ..	Loss Severity .....		100

(ii) The scorecard for highly complex institutions produces two scores: performance and loss severity.

(A) Performance score for highly complex institutions. The performance score for highly complex institutions is the weighted average of the scores for three components: weighted average CAMELS rating, weighted at 30 percent; ability to withstand asset-related stress score, weighted at 50 percent; and ability to withstand funding-related stress score, weighted at 20 percent.

(1) *Weighted average CAMELS rating score.* (i) To compute the score for the weighted average CAMELS rating, a weighted average of an institution's CAMELS component ratings is calculated using the following weights:

CAMELS component	Weight (percent)
C .....	25
A .....	20
M .....	25
E .....	10
L .....	10
S .....	10

(ii) A weighted average CAMELS rating converts to a score that ranges from 25 to 100. A weighted average rating of 1 equals a score of 25 and a weighted average of 3.5 or greater equals a score of 100. Weighted average CAMELS ratings between 1 and 3.5 are assigned a score between 25 and 100. The score increases at an increasing rate as the weighted average CAMELS rating increases. Appendix B of this subpart describes the conversion of a weighted average CAMELS rating to a score.

(2) *Ability to withstand asset-related stress score.* (i) The ability to withstand asset-related stress score is a weighted average of the scores for four measures: Leverage ratio; concentration measure; ratio of core earnings to average quarter-end total assets; credit quality measure and market risk measure. Appendix A of this subpart describes these measures.

(ii) The Leverage ratio and the ratio of core earnings to average quarter-end total assets are described in appendix A and the method of calculating the scores is described in appendix B of this subpart.

(iii) The score for the concentration measure for highly complex institutions is the greatest of the higher-risk assets to the sum of Tier 1 capital and reserves score, the top 20 counterparty exposure to the sum of Tier 1 capital and reserves score, or the largest counterparty exposure to the sum of Tier 1 capital and reserves score. Each ratio is described in appendix A of this subpart. The method used to convert the concentration measure into a score is described in appendix C of this subpart.

(iv) The credit quality score is the greater of the criticized and classified items to Tier 1 capital and reserves score or the underperforming assets to Tier 1 capital and reserves score. The market risk score is the weighted average of three scores—the trading revenue volatility to Tier 1 capital score, the market risk capital to Tier 1 capital score, and the level 3 trading assets to Tier 1 capital score. All of these ratios are described in appendix A of this subpart and the method of calculating the scores is described in appendix B. Each score is multiplied by its respective weight, and the resulting

weighted score is summed to compute the score for the market risk measure. An overall weight of 35 percent is allocated between the scores for the credit quality measure and market risk measure. The allocation depends on the

ratio of average trading assets to the sum of average securities, loans and trading assets (trading asset ratio) as follows:

(v) Weight for credit quality score = 35 percent \* (1—trading asset ratio); and,

(vi) Weight for market risk score = 35 percent \* trading asset ratio.

(vii) Each of the measures used to calculate the ability to withstand asset-related stress score is assigned the following cutoff values and weights:

#### CUTOFF VALUES AND WEIGHTS FOR MEASURES TO CALCULATE THE ABILITY TO WITHSTAND ASSET-RELATED STRESS SCORE

Measures of the ability to withstand asset-related stress	Cutoff values		Market risk measure (percent)	Weights (percent)
	Minimum (percent)	Maximum (percent)		
Leverage ratio .....	6	13	.....	10.
Concentration Measure .....	.....	.....	.....	35.
Higher Risk Assets/Tier 1 Capital and Reserves; .....	0	135	.....	.....
Top 20 Counterparty Exposure/Tier 1 Capital and Reserves; or .....	0	125	.....	.....
Largest Counterparty Exposure/Tier 1 Capital and Reserves .....	0	20	.....	.....
Core Earnings/Average Quarter-end Total Assets .....	0	2	.....	20.
Credit Quality Measure* .....	.....	.....	.....	35* (1 – Trading Asset Ratio).
Criticized and Classified Items to Tier 1 Capital and Reserves; or .....	7	100	.....	.....
Underperforming Assets/Tier 1 Capital and Reserves .....	2	35	.....	.....
Market Risk Measure* .....	.....	.....	.....	35* Trading Asset Ratio.
Trading Revenue Volatility/Tier 1 Capital .....	0	2	60	.....
Market Risk Capital/Tier 1 Capital .....	0	10	20	.....
Level 3 Trading Assets/Tier 1 Capital .....	0	35	20	.....

\* Combined, the credit quality measure and the market risk measure are assigned a 35 percent weight. The relative weight of each of the two scores depends on the ratio of average trading assets to the sum of average securities, loans and trading assets (trading asset ratio).

(viii) [Reserved]

(ix) The score of each measure is multiplied by its respective weight and the resulting weighted score is summed to compute the ability to withstand asset-related stress score, which can range from 0 to 100, where a score of 0 reflects the lowest risk and a score of 100 reflects the highest risk.

(3) Ability to withstand funding related stress score. Three measures are used to calculate the score for the ability to withstand funding-related stress: a core deposits to total liabilities ratio, a balance sheet liquidity ratio, and average short-term funding to average total assets ratio. Appendix A of this subpart describes these ratios. Appendix

B of this subpart describes how each measure is converted to a score. The ability to withstand funding-related stress score is the weighted average of the scores for the three measures. In the following table, cutoff values and weights are used to derive an institution's ability to withstand funding-related stress score:

#### CUTOFF VALUES AND WEIGHTS TO CALCULATE ABILITY TO WITHSTAND FUNDING-RELATED STRESS MEASURES

Measures of the ability to withstand funding-related stress	Cutoff values		Weights (percent)
	Minimum (percent)	Maximum (percent)	
Core Deposits/Total Liabilities .....	5	87	50
Balance Sheet Liquidity Ratio .....	7	243	30
Average Short-term Funding/Average Total Assets .....	2	19	20

(4) Calculation of Performance Score. The weighted average CAMELS score, the ability to withstand asset-related stress score, and the ability to withstand funding-related stress score are multiplied by their respective weights (30 percent, 50 percent and 20 percent,

respectively) and the results are summed to arrive at the performance score, which cannot be less than 0 or more than 100.

(B) *Loss severity score.* The loss severity score is based on a loss severity measure described in appendix D of this

subpart. Appendix B of this subpart also describes how the loss severity measure is converted to a score between 0 and 100. Cutoff values for the loss severity measure are:

#### CUTOFF VALUES FOR LOSS SEVERITY MEASURE

Measure of loss severity	Cutoff values	
	Minimum (percent)	Maximum (percent)
Loss Severity .....	0	28

(C) *Total score.* The performance and loss severity scores are combined to produce a total score. The loss severity score is converted into a loss severity factor that ranges from 0.8 (score of 5 or lower) to 1.2 (score of 85 or higher). Scores at or below the minimum cutoff of 5 receive a loss severity factor of 0.8, and scores at or above the maximum cutoff of 85 receive a loss severity factor of 1.2. The following linear interpolation converts loss severity scores between the cutoffs into a loss

severity factor: (Loss Severity Factor =  $0.8 + [0.005 \times (\text{Loss Severity Score} - 5)]$ ). The performance score is multiplied by the loss severity factor to produce a total score (total score = performance score \* loss severity factor). The total score can be up to 20 percent higher or lower than the performance score but cannot be less than 30 or more than 90. The total score is subject to adjustment, up or down, by a maximum of 15 points, as set forth in paragraph (b)(3) of this section. The resulting total score

after adjustment cannot be less than 30 or more than 90.

(D) *Initial base assessment rate.* A highly complex institution with a total score of 30 pays the minimum initial base assessment rate and an institution with a total score of 90 pays the maximum initial base assessment rate. For total scores between 30 and 90, initial base assessment rates rise at an increasing rate as the total score increases, calculated according to the following formula:

$$\text{Rate} = \text{Minimum Rate} + \left[ \left( \left( 1.4245 \times \left( \frac{\text{Score}}{100} \right)^3 \right) - 0.0385 \right) \times (\text{Maximum Rate} - \text{Minimum Rate}) \right]$$

where Rate is the initial base assessment rate (expressed in basis points), Maximum Rate is the maximum initial base assessment rate then in effect (expressed in basis points), and Minimum Rate is the minimum initial base assessment rate then in effect (expressed in basis points). Initial base assessment rates are subject to adjustment pursuant to paragraphs (b)(3), (e)(1), and (e)(2) of this section; highly complex institutions that are not well capitalized or have a CAMELS composite rating of 3, 4 or 5 shall be subject to the adjustment at paragraph (e)(3) of this section; these adjustments shall result in the institution's total base assessment rate, which in no case can be lower than 50 percent of the institution's initial base assessment rate.

(3) Adjustment to total score for large institutions and highly complex institutions. The total score for large institutions and highly complex institutions is subject to adjustment, up or down, by a maximum of 15 points, based upon significant risk factors that are not adequately captured in the appropriate scorecard. In making such adjustments, the FDIC may consider such information as financial performance and condition information and other market or supervisory information. The FDIC will also consult with an institution's primary federal regulator and, for state chartered institutions, state banking supervisor.

(i) *Prior notice of adjustments—(A) Prior notice of upward adjustment.* Prior to making any upward adjustment to an institution's total score because of considerations of additional risk information, the FDIC will formally notify the institution and its primary federal regulator and provide an opportunity to respond. This notification will include the reasons for the adjustment and when the adjustment will take effect.

(B) *Prior notice of downward adjustment.* Prior to making any downward adjustment to an institution's total score because of considerations of additional risk information, the FDIC will formally notify the institution's primary federal regulator and provide an opportunity to respond.

(ii) *Determination whether to adjust upward; effective period of adjustment.* After considering an institution's and the primary federal regulator's responses to the notice, the FDIC will determine whether the adjustment to an institution's total score is warranted, taking into account any revisions to scorecard measures, as well as any actions taken by the institution to address the FDIC's concerns described in the notice. The FDIC will evaluate the need for the adjustment each subsequent assessment period. Except as provided in paragraph (b)(3)(iv) of this section, the amount of adjustment cannot exceed the proposed adjustment amount contained in the initial notice unless additional notice is provided so that the primary federal regulator and the institution may respond.

(iii) *Determination whether to adjust downward; effective period of adjustment.* After considering the primary federal regulator's responses to the notice, the FDIC will determine whether the adjustment to total score is warranted, taking into account any revisions to scorecard measures. Any downward adjustment in an institution's total score will remain in effect for subsequent assessment periods until the FDIC determines that an adjustment is no longer warranted. Downward adjustments will be made without notification to the institution. However, the FDIC will provide advance notice to an institution and its primary federal regulator and give them

an opportunity to respond before removing a downward adjustment.

(iv) *Adjustment without notice.* Notwithstanding the notice provisions set forth above, the FDIC may change an institution's total score without advance notice under this paragraph, if the institution's supervisory ratings or the scorecard measures deteriorate.

(c) *New small institutions—(1) Risk Categories.* Each new small institution shall be assigned to one of the following four Risk Categories based upon the institution's capital evaluation and supervisory evaluation as defined in this section.

(i) *Risk Category I.* New small institutions in Supervisory Group A that are Well Capitalized will be assigned to Risk Category I.

(ii) *Risk Category II.* New small institutions in Supervisory Group A that are Adequately Capitalized, and new small institutions in Supervisory Group B that are either Well Capitalized or Adequately Capitalized will be assigned to Risk Category II.

(iii) *Risk Category III.* New small institutions in Supervisory Groups A and B that are Undercapitalized, and new small institutions in Supervisory Group C that are Well Capitalized or Adequately Capitalized will be assigned to Risk Category III.

(iv) *Risk Category IV.* New small institutions in Supervisory Group C that are Undercapitalized will be assigned to Risk Category IV.

(2) *Capital evaluations.* Each new small institution will receive one of the following three capital evaluations on the basis of data reported in the institution's Consolidated Reports of Condition and Income or Thrift Financial Report (or successor report, as appropriate) dated as of March 31 for the assessment period beginning the preceding January 1; dated as of June 30 for the assessment period beginning the

preceding April 1; dated as of September 30 for the assessment period beginning the preceding July 1; and dated as of December 31 for the assessment period beginning the preceding October 1.

(i) *Well Capitalized.* A Well Capitalized institution is one that satisfies each of the following capital ratio standards: Total risk-based capital ratio, 10.0 percent or greater; tier 1 risk-based capital ratio, 8.0 percent or greater; leverage ratio, 5.0 percent or greater; and common equity tier 1 capital ratio, 6.5 percent or greater, and after January 1, 2018, if the institution is an insured depository institution subject to the enhanced supplementary leverage ratio standards under 12 CFR 6.4(c)(1)(iv)(B), 12 CFR 208.43(c)(1)(iv)(B), or 12 CFR 324.403(b)(1)(vi), as each may be amended from time to time, a supplementary leverage ratio of 6.0 percent or greater.

(ii) *Adequately Capitalized.* An Adequately Capitalized institution is one that does not satisfy the standards of Well Capitalized in paragraph (c)(2)(i) of this section but satisfies each of the following capital ratio standards: Total risk-based capital ratio, 8.0 percent or greater; tier 1 risk-based capital ratio, 6.0 percent or greater; leverage ratio, 4.0 percent or greater; and common equity tier 1 capital ratio, 4.5 percent or greater, and after January 1, 2018, if the institution is an insured depository institution subject to the advanced approaches risk-based capital rules under 12 CFR 6.4(c)(2)(iv)(B), 12 CFR 208.43(c)(2)(iv)(B), or 12 CFR 324.403(b)(2)(vi), as each may be amended from time to time, a supplementary leverage ratio of 3.0 percent or greater.

(iii) *Undercapitalized.* An undercapitalized institution is one that does not qualify as either Well Capitalized or Adequately Capitalized under paragraphs (c)(2)(i) and (ii) of this section.

(3) *Supervisory evaluations.* Each new small institution will be assigned to one of three Supervisory Groups based on the Corporation's consideration of supervisory evaluations provided by the institution's primary federal regulator. The supervisory evaluations include the results of examination findings by the primary federal regulator, as well as other information that the primary federal regulator determines to be relevant. In addition, the Corporation will take into consideration such other information (such as state examination findings, as appropriate) as it determines to be relevant to the institution's financial condition and the

risk posed to the Deposit Insurance Fund. The three Supervisory Groups are:

(i) *Supervisory Group "A."* This Supervisory Group consists of financially sound institutions with only a few minor weaknesses;

(ii) *Supervisory Group "B."* This Supervisory Group consists of institutions that demonstrate weaknesses which, if not corrected, could result in significant deterioration of the institution and increased risk of loss to the Deposit Insurance Fund; and

(iii) *Supervisory Group "C."* This Supervisory Group consists of institutions that pose a substantial probability of loss to the Deposit Insurance Fund unless effective corrective action is taken.

(4) *Assessment method for new small institutions in Risk Category I—(i) Maximum Initial Base Assessment Rate for Risk Category I New Small Institutions.* A new small institution in Risk Category I shall be assessed the maximum initial base assessment rate for Risk Category I small institutions in the relevant assessment period.

(ii) *New small institutions not subject to certain adjustments.* No new small institution in any risk category shall be subject to the adjustment in (e)(1) of this section.

(iii) *Implementation of CAMELS rating changes—(A) Changes between risk categories.* If, during a quarter, a CAMELS composite rating change occurs that results in a Risk Category I institution moving from Risk Category I to Risk Category II, III or IV, the institution's initial base assessment rate for the portion of the quarter that it was in Risk Category I shall be the maximum initial base assessment rate for the relevant assessment period, subject to adjustment pursuant to paragraph (e)(2) of this section, as appropriate, and adjusted for the actual assessment rates set by the Board under § 327.10(g). For the portion of the quarter that the institution was not in Risk Category I, the institution's initial base assessment rate, which shall be subject to adjustment pursuant to paragraphs (e)(2) and (3) of this section, as appropriate, shall be determined under the assessment schedule for the appropriate Risk Category. If, during a quarter, a CAMELS composite rating change occurs that results in an institution moving from Risk Category II, III or IV to Risk Category I, then the maximum initial base assessment rate for new small institutions in Risk Category I shall apply for the portion of the quarter that it was in Risk Category I, subject to adjustment pursuant to paragraph (e)(2) of this section, as appropriate, and

adjusted for the actual assessment rates set by the Board under § 327.10(g). For the portion of the quarter that the institution was not in Risk Category I, the institution's initial base assessment rate, which shall be subject to adjustment pursuant to paragraphs (e)(2) and (3) of this section shall be determined under the assessment schedule for the appropriate Risk Category.

(d) *Insured branches of foreign banks—(1) Risk categories for insured branches of foreign banks.* Insured branches of foreign banks shall be assigned to risk categories as set forth in paragraph (c)(1) of this section.

(2) *Capital evaluations for insured branches of foreign banks.* Each insured branch of a foreign bank will receive one of the following three capital evaluations on the basis of data reported in the institution's Report of Assets and Liabilities of U.S. Branches and Agencies of Foreign Banks dated as of March 31 for the assessment period beginning the preceding January 1; dated as of June 30 for the assessment period beginning the preceding April 1; dated as of September 30 for the assessment period beginning the preceding July 1; and dated as of December 31 for the assessment period beginning the preceding October 1.

(i) *Well Capitalized.* An insured branch of a foreign bank is Well Capitalized if the insured branch:

(A) Maintains the pledge of assets required under § 347.209 of this chapter; and

(B) Maintains the eligible assets prescribed under § 347.210 of this chapter at 108 percent or more of the average book value of the insured branch's third-party liabilities for the quarter ending on the report date specified in paragraph (d)(2) of this section.

(ii) *Adequately Capitalized.* An insured branch of a foreign bank is Adequately Capitalized if the insured branch:

(A) Maintains the pledge of assets required under § 347.209 of this chapter; and

(B) Maintains the eligible assets prescribed under § 347.210 of this chapter at 106 percent or more of the average book value of the insured branch's third-party liabilities for the quarter ending on the report date specified in paragraph (d)(2) of this section; and

(C) Does not meet the definition of a Well Capitalized insured branch of a foreign bank.

(iii) *Undercapitalized.* An insured branch of a foreign bank is undercapitalized institution if it does

not qualify as either Well Capitalized or Adequately Capitalized under paragraphs (d)(2)(i) and (ii) of this section.

(3) *Supervisory evaluations for insured branches of foreign banks.* Each insured branch of a foreign bank will be assigned to one of three supervisory groups as set forth in paragraph (c)(3) of this section.

(4) *Assessment method for insured branches of foreign banks in Risk Category I.* Insured branches of foreign banks in Risk Category I shall be assessed using the weighted average ROCA component rating.

(i) *Weighted average ROCA component rating.* The weighted average ROCA component rating shall equal the sum of the products that result from multiplying ROCA component ratings by the following percentages: Risk Management—35%, Operational Controls—25%, Compliance—25%, and Asset Quality—15%. The weighted average ROCA rating will be multiplied by 5.076 (which shall be the pricing multiplier). To this result will be added a uniform amount. The resulting sum—the initial base assessment rate—will equal an institution's total base assessment rate; provided, however, that no institution's total base assessment rate will be less than the minimum total base assessment rate in effect for Risk Category I institutions for that quarter nor greater than the maximum total base assessment rate in effect for Risk Category I institutions for that quarter.

(ii) *Uniform amount.* Except as adjusted for the actual assessment rates set by the Board under § 327.10(g), the uniform amount for all insured branches of foreign banks shall be:

(A) – 3.127 whenever the assessment rate schedule set forth in § 327.10(a) is in effect;

(B) – 5.127 whenever the assessment rate schedule set forth in § 327.10(b) is in effect;

(C) – 6.127 whenever the assessment rate schedule set forth in § 327.10(c) is in effect; or

(D) – 7.127 whenever the assessment rate schedule set forth in § 327.10(d) is in effect.

(iii) *Insured branches of foreign banks not subject to certain adjustments.* No insured branch of a foreign bank in any risk category shall be subject to the adjustments in paragraphs (b)(3) or (e)(1) or (3) of this section.

(iv) *Implementation of changes between Risk Categories for insured branches of foreign banks.* If, during a quarter, a ROCA rating change occurs that results in an insured branch of a foreign bank moving from Risk Category I to Risk Category II, III or IV, the

institution's initial base assessment rate for the portion of the quarter that it was in Risk Category I shall be determined using the weighted average ROCA component rating. For the portion of the quarter that the institution was not in Risk Category I, the institution's initial base assessment rate shall be determined under the assessment schedule for the appropriate Risk Category. If, during a quarter, a ROCA rating change occurs that results in an insured branch of a foreign bank moving from Risk Category II, III or IV to Risk Category I, the institution's assessment rate for the portion of the quarter that it was in Risk Category I shall equal the rate determined as provided using the weighted average ROCA component rating. For the portion of the quarter that the institution was not in Risk Category I, the institution's initial base assessment rate shall be determined under the assessment schedule for the appropriate Risk Category.

(v) *Implementation of changes within Risk Category I for insured branches of foreign banks.* If, during a quarter, an insured branch of a foreign bank remains in Risk Category I, but a ROCA component rating changes that will affect the institution's initial base assessment rate, separate assessment rates for the portion(s) of the quarter before and after the change(s) shall be determined under this paragraph (d)(4) of this section.

(e) *Adjustments—(1) Unsecured debt adjustment to initial base assessment rate for all institutions.* All institutions, except new institutions as provided under paragraphs (g)(1) and (2) of this section and insured branches of foreign banks as provided under paragraph (d)(4)(iii) of this section, shall be subject to an adjustment of assessment rates for unsecured debt. Any unsecured debt adjustment shall be made after any adjustment under paragraph (b)(3) of this section.

(i) *Application of unsecured debt adjustment.* The unsecured debt adjustment shall be determined as the sum of the initial base assessment rate plus 40 basis points; that sum shall be multiplied by the ratio of an insured depository institution's long-term unsecured debt to its assessment base. The amount of the reduction in the assessment rate due to the adjustment is equal to the dollar amount of the adjustment divided by the amount of the assessment base.

(ii) *Limitation.* No unsecured debt adjustment for any institution shall exceed the lesser of 5 basis points or 50 percent of the institution's initial base assessment rate.

(iii) *Applicable quarterly reports of condition.* Unsecured debt adjustment ratios for any given quarter shall be calculated from quarterly reports of condition (Consolidated Reports of Condition and Income and Thrift Financial Reports, or any successor reports to either, as appropriate) filed by each institution as of the last day of the quarter.

(2) *Depository institution debt adjustment to initial base assessment rate for all institutions.* All institutions shall be subject to an adjustment of assessment rates for unsecured debt held that is issued by another depository institution. Any such depository institution debt adjustment shall be made after any adjustment under paragraphs (b)(3) and (e)(1) of this section.

(i) *Application of depository institution debt adjustment.* An insured depository institution shall pay a 50 basis point adjustment on the amount of unsecured debt it holds that was issued by another insured depository institution to the extent that such debt exceeds 3 percent of the institution's Tier 1 capital. The amount of long-term unsecured debt issued by another insured depository institution shall be calculated using the same valuation methodology used to calculate the amount of such debt for reporting on the asset side of the balance sheets.

(ii) *Applicable quarterly reports of condition.* Depository institution debt adjustment ratios for any given quarter shall be calculated from quarterly reports of condition (Consolidated Reports of Condition and Income and Thrift Financial Reports, or any successor reports to either, as appropriate) filed by each institution as of the last day of the quarter.

(3) *Brokered Deposit Adjustment.* All new small institutions in Risk Categories II, III, and IV, all established small institutions, all large institutions and all highly complex institutions, except established small institutions and large and highly complex institutions (including new large and new highly complex institutions) that are well capitalized and have a CAMELS composite rating of 1 or 2, shall be subject to an assessment rate adjustment for brokered deposits. Any such brokered deposit adjustment shall be made after any adjustment under paragraphs (b)(3) and (e)(1) and (2) of this section. The brokered deposit adjustment includes all brokered deposits as defined in Section 29 of the Federal Deposit Insurance Act (12 U.S.C. 1831f), and 12 CFR 337.6, including reciprocal deposits as defined in § 327.8(p), and brokered deposits that

consist of balances swept into an insured institution from another institution. The adjustment under this paragraph is limited to those institutions whose ratio of brokered deposits to domestic deposits is greater than 10 percent; asset growth rates do not affect the adjustment. Insured branches of foreign banks are not subject to the brokered deposit adjustment as provided in paragraph (d)(4)(iii) of this section.

(i) *Application of brokered deposit adjustment.* The brokered deposit adjustment shall be determined by multiplying 25 basis points by the ratio of the difference between an insured depository institution's brokered deposits and 10 percent of its domestic deposits to its assessment base.

(ii) *Limitation.* The maximum brokered deposit adjustment will be 10 basis points; the minimum brokered deposit adjustment will be 0.

(iii) *Applicable quarterly reports of condition.* Brokered deposit ratios for any given quarter shall be calculated from the quarterly reports of condition (Call Reports and Thrift Financial Reports, or any successor reports to either, as appropriate) filed by each institution as of the last day of the quarter.

(f) *Request to be treated as a large institution—(1) Procedure.* Any institution with assets of between \$5 billion and \$10 billion may request that the FDIC determine its assessment rate as a large institution. The FDIC will consider such a request provided that it has sufficient information to do so. Any such request must be made to the FDIC's Division of Insurance and Research. Any approved change will become effective within one year from the date of the request. If an institution whose request has been granted subsequently reports assets of less than \$5 billion in its report of condition for four consecutive quarters, the institution shall be deemed a small institution for assessment purposes.

(2) *Time limit on subsequent request for alternate method.* An institution whose request to be assessed as a large institution is granted by the FDIC shall not be eligible to request that it be assessed as a small institution for a period of three years from the first quarter in which its approved request to be assessed as a large institution became effective. Any request to be assessed as a small institution must be made to the FDIC's Division of Insurance and Research.

(3) *Request for review.* An institution that disagrees with the FDIC's

determination that it is a large, highly complex, or small institution may request review of that determination pursuant to § 327.4(c).

(g) *New and established institutions and exceptions—(1) New small institutions.* A new small Risk Category I institution shall be assessed the Risk Category I maximum initial base assessment rate for the relevant assessment period. No new small institution in any risk category shall be subject to the unsecured debt adjustment as determined under paragraph (e)(1) of this section. All new small institutions in any Risk Category shall be subject to the depository institution debt adjustment as determined under paragraph (e)(2) of this section. All new small institutions in Risk Categories II, III, and IV shall be subject to the brokered deposit adjustment as determined under paragraph (e)(3) of this section.

(2) *New large institutions and new highly complex institutions.* All new large institutions and all new highly complex institutions shall be assessed under the appropriate method provided at paragraph (b)(1) or (2) of this section and subject to the adjustments provided at paragraphs (b)(3) and (e)(2) and (3) of this section. No new highly complex or large institutions are entitled to adjustment under paragraph (e)(1) of this section. If a large or highly complex institution has not yet received CAMELS ratings, it will be given a weighted CAMELS rating of 2 for assessment purposes until actual CAMELS ratings are assigned.

(3) *CAMELS ratings for the surviving institution in a merger or consolidation.* When an established institution merges with or consolidates into a new institution, if the FDIC determines the resulting institution to be an established institution under § 327.8(k)(1), its CAMELS ratings for assessment purposes will be based upon the established institution's ratings prior to the merger or consolidation until new ratings become available.

(4) *Rate applicable to institutions subject to subsidiary or credit union exception—(i) Established small institutions.* A small institution that is established under § 327.8(k)(4) or (5) shall be assessed as follows:

(A) If the institution does not have a CAMELS composite rating, its initial base assessment rate shall be 2 basis points above the minimum initial base assessment rate applicable to established small institutions until it receives a CAMELS composite rating.

(B) If the institution has a CAMELS composite rating but no CAMELS

component ratings, its initial assessment rate shall be determined using the financial ratios method, as set forth in (a)(1) of this section, but its CAMELS composite rating will be substituted for its weighted average CAMELS component rating and, if the institution has not filed four quarterly reports of condition, then the assessment rate will be determined by annualizing, where appropriate, financial ratios from all quarterly reports of condition that have been filed.

(ii) *Large or highly complex institutions.* If a large or highly complex institution is considered established under § 327.8(k)(4) or (5), but does not have CAMELS component ratings, it will be given a weighted CAMELS rating of 2 for assessment purposes until actual CAMELS ratings are assigned.

(5) *Request for review.* An institution that disagrees with the FDIC's determination that it is a new institution may request review of that determination pursuant to § 327.4(c).

(h) *Assessment rates for bridge depository institutions and conservatorships.* Institutions that are bridge depository institutions under 12 U.S.C. 1821(n) and institutions for which the Corporation has been appointed or serves as conservator shall, in all cases, be assessed at the Risk Category I minimum initial base assessment rate, which shall not be subject to adjustment under paragraphs (b)(3), (e)(1), (2), or (3) of this section.

■ 7. In § 327.10, revise paragraphs (b) through (f) to read as follows:

(b) Assessment rate schedules for established small institutions and large and highly complex institutions applicable in the first calendar quarter after June 30, 2015, that the reserve ratio of the DIF reaches or exceeds 1.15 percent for the previous calendar quarter and in all subsequent quarters that the reserve ratio is less than 2 percent.

(1) *Initial base assessment rate schedule for established small institutions and large and highly complex institutions.* In the first calendar quarter after June 30, 2015, that the reserve ratio of the DIF reaches or exceeds 1.15 percent for the previous calendar quarter and in all subsequent quarters that the reserve ratio is less than 2 percent, the initial base assessment rate for established small institutions and large and highly complex institutions, except as provided in paragraph (f) of this section, shall be the rate prescribed in the following schedule:

**INITIAL BASE ASSESSMENT RATE SCHEDULE ONCE THE RESERVE RATIO OF THE DIF REACHES 1.15 PERCENT AND THE RESERVE RATIO FOR THE IMMEDIATELY PRIOR ASSESSMENT PERIOD IS LESS THAN 2 PERCENT \***

	Established small institutions			Large & highly complex institutions
	CAMELS Composite			
	1 or 2	3	4 or 5	
Initial Base Assessment Rate .....	3 to 16	6 to 30	16 to 30	3 to 30

\* All amounts for all risk categories are in basis points annually. Initial base rates that are not the minimum or maximum rate will vary between these rates.

(i) CAMELS Composite 1- and 2-rated Established Small Institutions Initial Base Assessment Rate Schedule. The annual initial base assessment rates for all established small institutions with a CAMELS composite rating of 1 or 2 shall range from 3 to 16 basis points.

(ii) CAMELS Composite 3-rated Established Small Institutions Initial Base Assessment Rate Schedule. The annual initial base assessment rates for all established small institutions with a

CAMELS composite rating of 3 shall range from 6 to 30 basis points.

(iii) CAMELS Composite 4- and 5-rated Established Small Institutions Initial Base Assessment Rate Schedule. The annual initial base assessment rates for all established small institutions with a CAMELS composite rating of 4 or 5 shall range from 16 to 30 basis points.

(iv) Large and Highly Complex Institutions Initial Base Assessment Rate Schedule. The annual initial base assessment rates for all large and highly

complex institutions shall range from 3 to 30 basis points.

(2) *Total base assessment rate schedule after adjustments.* Once the reserve ratio of the DIF first reaches 1.15 percent, and the reserve ratio for the immediately prior assessment period is less than 2 percent, the total base assessment rates after adjustments for established small institutions and large and highly complex institutions shall be as prescribed in the following schedule.

**TOTAL BASE ASSESSMENT RATE SCHEDULE (AFTER ADJUSTMENTS) \* IF RESERVE RATIO OF THE DIF REACHES 1.15 PERCENT AND THE RESERVE RATIO FOR THE IMMEDIATELY PRIOR ASSESSMENT PERIOD IS LESS THAN 2 PERCENT \*\***

	Established small institutions			Large & highly complex institutions
	CAMELS composite			
	1 or 2	3	4 or 5	
Initial Base Assessment Rate.	3 to 16 .....	6 to 30 .....	16 to 30 .....	3 to 30.
Unsecured Debt Adjustment.	−5 to 0 .....	−5 to 0 .....	−5 to 0 .....	−5 to 0
Brokered Deposit Adjustment.	0 to 10 *** .....	0 to 10 .....	0 to 10 .....	0 to 10
Total Base Assessment Rate.	1.5 to 26 .....	3 to 40 .....	11 to 40 .....	1.5 to 40

\* The depository institution debt adjustment, which is not included in the table, can increase total base assessment rates above the maximum assessment rates shown in the table.

\*\* All amounts for all risk categories are in basis points annually. Total base rates that are not the minimum or maximum rate will vary between these rates.

\*\*\* The brokered deposit adjustment applies to established small banks with CAMELS composite ratings of 1 or 2 only if they are less than well capitalized.

(i) CAMELS Composite 1- and 2-rated Established Small Institutions Total Base Assessment Rate Schedule. The annual total base assessment rates for all established small institutions with a CAMELS composite rating of 1 or 2 shall range from 1.5 to 26 basis points.

(ii) CAMELS Composite 3-rated Established Small Institutions Total Base Assessment Rate Schedule. The annual total base assessment rates for all established small institutions with a CAMELS composite rating of 3 shall range from 3 to 40 basis points.

(iii) CAMELS Composite 4- and 5-rated Established Small Institutions Total Base Assessment Rate Schedule. The annual total base assessment rates for all established small institutions with a CAMELS composite rating of 4 or 5 shall range from 11 to 40 basis points.

(iv) Large and Highly Complex Institutions Total Base Assessment Rate Schedule. The annual total base assessment rates for all large and highly complex institutions shall range from 1.5 to 40 basis points.

(c) *Assessment rate schedules if the reserve ratio of the DIF for the prior*

*assessment period is equal to or greater than 2 percent and less than 2.5 percent—(1) Initial base assessment rate schedule for established small institutions and large and highly complex institutions.* If the reserve ratio of the DIF for the prior assessment period is equal to or greater than 2 percent and less than 2.5 percent, the initial base assessment rate for established small institutions and large and highly complex institutions, except as provided in paragraph (f) of this section, shall be the rate prescribed in the following schedule:

**INITIAL BASE ASSESSMENT RATE SCHEDULE IF RESERVE RATIO FOR PRIOR ASSESSMENT PERIOD IS EQUAL TO OR GREATER THAN 2 PERCENT BUT LESS THAN 2.5 PERCENT \***

	Established small banks			Large & highly complex institutions
	CAMELS Composite			
	1 or 2	3	4 or 5	
Initial Base Assessment Rate .....	2 to 14	5 to 28	14 to 28	2 to 28

\* All amounts for all risk categories are in basis points annually. Initial base rates that are not the minimum or maximum rate will vary between these rates.

(i) *CAMELS Composite 1- and 2-rated Established Small Institutions Initial Base Assessment Rate Schedule.* The annual initial base assessment rates for all established small institutions with a CAMELS composite rating of 1 or 2 shall range from 2 to 14 basis points.

(ii) *CAMELS Composite 3-rated Established Small Institutions Initial Base Assessment Rate Schedule.* The annual initial base assessment rates for all established small institutions with a CAMELS composite rating of 3 shall range from 5 to 28 basis points.

(iii) *CAMELS Composite 4- and 5-rated Established Small Institutions Initial Base Assessment Rate Schedule.* The annual initial base assessment rates for all established small institutions with a CAMELS composite rating of 4 or 5 shall range from 14 to 28 basis points.

(iv) *Large and Highly Complex Institutions Initial Base Assessment Rate Schedule.* The annual initial base assessment rates for all large and highly complex institutions shall range from 2 to 28 basis points.

(2) *Total Base Assessment Rate Schedule after Adjustments for Established Small Institutions and Large and Highly Complex Institutions.* If the reserve ratio of the DIF for the prior assessment period is equal to or greater than 2 percent and less than 2.5 percent, the total base assessment rates after adjustments for established small institutions and large and highly complex institutions, except as provided in paragraph (f) of this section, shall be as prescribed in the following schedule.

**TOTAL BASE ASSESSMENT RATE SCHEDULE (AFTER ADJUSTMENTS) \* IF RESERVE RATIO FOR PRIOR ASSESSMENT PERIOD IS EQUAL TO OR GREATER THAN 2 PERCENT BUT LESS THAN 2.5 PERCENT \*\***

	Established small banks			Large & highly complex institutions
	CAMELS composite			
	1 or 2	3	4 or 5	
Initial Base Assessment Rate .....	2 to 14 .....	5 to 28 .....	14 to 28 .....	2 to 28.
Unsecured Debt Adjustment ** .....	- 5 to 0 .....	- 5 to 0 .....	- 5 to 0 .....	- 5 to 0.
Brokered Deposit Adjustment .....	0 to 10 *** .....	0 to 10 .....	0 to 10 .....	0 to 10.
Total Base Assessment Rate .....	1 to 24 .....	2.5 to 38 .....	9 to 38 .....	1 to 38.

\* The depository institution debt adjustment, which is not included in the table, can increase total base assessment rates above the maximum assessment rates shown in the table.

\*\* All amounts for all risk categories are in basis points annually. Total base rates that are not the minimum or maximum rate will vary between these rates.

\*\*\* The brokered deposit adjustment applies to established small banks with CAMELS composite ratings of 1 or 2 only if they are less than well capitalized.

(i) *CAMELS Composite 1- and 2-rated Established Small Institutions Total Base Assessment Rate Schedule.* The annual total base assessment rates for all established small institutions with a CAMELS composite rating of 1 or 2 shall range from 1 to 24 basis points.

(ii) *CAMELS Composite 3-rated Established Small Institutions Total Base Assessment Rate Schedule.* The annual total base assessment rates for all established small institutions with a CAMELS composite rating of 3 shall range from 2.5 to 38 basis points.

(iii) *CAMELS Composite 4- and 5-rated Established Small Institutions Total Base Assessment Rate Schedule.* The annual total base assessment rates for all established small institutions with a CAMELS composite rating of 4 or 5 shall range from 9 to 38 basis points.

(iv) *Large and Highly Complex Institutions Total Base Assessment Rate Schedule.* The annual total base assessment rates for all large and highly complex institutions shall range from 1 to 38 basis points.

(d) *Assessment rate schedules if the reserve ratio of the DIF for the prior assessment period is greater than 2.5 percent—(1) Initial Base Assessment Rate Schedule.* If the reserve ratio of the DIF for the prior assessment period is greater than 2.5 percent, the initial base assessment rate for established small institutions and a large and highly complex institutions, except as provided in paragraph (f) of this section, shall be the rate prescribed in the following schedule:



**INITIAL BASE ASSESSMENT RATE SCHEDULE IF RESERVE RATIO FOR PRIOR ASSESSMENT PERIOD IS GREATER THAN OR EQUAL TO 2.5 PERCENT \***

	Established small banks			Large & highly complex institutions
	CAMELS composite			
	1 or 2	3	4 or 5	
Initial Base Assessment Rate .....	1 to 13	4 to 25	13 to 25	1 to 25

\* All amounts for all risk categories are in basis points annually. Initial base rates that are not the minimum or maximum rate will vary between these rates.

(i) CAMELS Composite 1- and 2-rated Established Small Institutions Initial Base Assessment Rate Schedule. The annual initial base assessment rates for all established small institutions with a CAMELS composite rating of 1 or 2 shall range from 1 to 13 basis points.

(ii) CAMELS Composite 3-rated Established Small Institutions Initial Base Assessment Rate Schedule. The annual initial base assessment rates for all established small institutions with a

CAMELS composite rating of 3 shall range from 4 to 25 basis points.

(iii) CAMELS Composite 4- and 5-rated Established Small Institutions Initial Base Assessment Rate Schedule. The annual initial base assessment rates for all established small institutions with a CAMELS composite rating of 4 or 5 shall range from 13 to 25 basis points.

(iv) Large and Highly Complex Institutions Initial Base Assessment Rate Schedule. The annual initial base assessment rates for all large and highly

complex institutions shall range from 1 to 25 basis points.

(2) Total Base Assessment Rate Schedule after Adjustments. If the reserve ratio of the DIF for the prior assessment period is greater than 2.5 percent, the total base assessment rates after adjustments for established small institutions and large and highly complex institutions, except as provided in paragraph (f) of this section, shall be the rate prescribed in the following schedule.

**TOTAL BASE ASSESSMENT RATE SCHEDULE (AFTER ADJUSTMENTS) \* IF RESERVE RATIO FOR PRIOR ASSESSMENT PERIOD IS GREATER THAN OR EQUAL TO 2.5 PERCENT \*\***

	Small banks			Large & highly complex institutions
	CAMELS composite			
	1 or 2	3	4 or 5	
Initial Base Assessment Rate .....	1 to 13 .....	4 to 25 .....	13 to 25 .....	1 to 25.
Unsecured Debt Adjustment ** .....	- 5 to 0 .....	- 5 to 0 .....	- 5 to 0 .....	- 5 to 0.
Brokered Deposit Adjustment .....	0 to 10 *** .....	0 to 10 .....	0 to 10 .....	0 to 10.
Total Base Assessment Rate .....	.5 to 23 .....	2 to 35 .....	8 to 35 .....	.5 to 35.

\* The depository institution debt adjustment, which is not included in the table, can increase total base assessment rates above the maximum assessment rates shown in the table.

\*\* All amounts for all risk categories are in basis points annually. Total base rates that are not the minimum or maximum rate will vary between these rates.

\*\*\* The brokered deposit adjustment applies to established small banks with CAMELS composite ratings of 1 or 2 only if they are less than well capitalized.

(i) CAMELS Composite 1- and 2-rated Established Small Institutions Total Base Assessment Rate Schedule. The annual total base assessment rates for all established small institutions with a CAMELS composite rating of 1 or 2 shall range from 0.5 to 23 basis points.

(ii) CAMELS Composite 3-rated Established Small Institutions Total Base Assessment Rate Schedule. The annual total base assessment rates for all established small institutions with a CAMELS composite rating of 3 shall range from 2 to 35 basis points.

(iii) CAMELS Composite 4- and 5-rated Established Small Institutions Total Base Assessment Rate Schedule. The annual total base assessment rates for all established small institutions with a CAMELS composite rating of 4 or 5 shall range from 8 to 35 basis points.

(iv) Large and Highly Complex Institutions Total Base Assessment Rate Schedule. The annual total base assessment rates for all large and highly complex institutions shall range from 0.5 to 35 basis points.

(e) Assessment Rate Schedules for New Institutions and Insured Branches of Foreign Banks.

(1) New depository institutions, as defined in 327.8(j), shall be subject to the assessment rate schedules as follows:

(i) *Prior to the reserve ratio of the DIF first reaching 1.15 percent after June 30, 2015.* Prior to the reserve ratio of the DIF reaching 1.15 percent for the first time after June 30, 2015, all new institutions shall be subject to the initial and total base assessment rate schedules provided for in paragraph (a) of this section.

(ii) *Assessment rate schedules for new large and highly complex institutions once the DIF reserve ratio first reaches 1.15 percent after June 30, 2015.*

Beginning the first calendar quarter after June 30, 2015 in which the reserve ratio of the DIF reaches or exceeds 1.15 percent in the previous calendar quarter, new large and highly complex institutions shall be subject to the initial and total base assessment rate schedules provided for in paragraph (b) of this section, even if the reserve ratio equals or exceeds 2 percent or 2.5 percent.

(iii) *Assessment rate schedules for new small institutions once the DIF reserve ratio first reaches 1.15 percent after June 30, 2015.*

(A) Initial Base Assessment Rate Schedule for New Small Institutions. Beginning the first calendar quarter after June 30, 2015 in which the reserve ratio

of the DIF reaches or exceeds 1.15 percent in the previous calendar quarter, the initial base assessment rate

for a new small institution shall be the rate prescribed in the following

schedule, even if the reserve ratio equals or exceeds 2 percent or 2.5 percent.

**INITIAL BASE ASSESSMENT RATE SCHEDULE IF RESERVE RATIO FOR PRIOR ASSESSMENT PERIOD IS EQUAL TO OR GREATER THAN 1.15 PERCENT**

	Risk category I	Risk category II	Risk category III	Risk category IV
Initial Assessment Rate .....	7	12	19	30

\* All amounts for all risk categories are in basis points annually.

(1) Risk Category I Initial Base Assessment Rate Schedule. The annual initial base assessment rates for all new small institutions in Risk Category I shall be 7 basis points.

Categories II, III, and IV shall be 12, 19, and 30 basis points, respectively.

(3) All new small institutions in any one risk category, other than Risk Category I, will be charged the same initial base assessment rate, subject to adjustment as appropriate.

(B) Total Base Assessment Rate Schedule for New Small Institutions. Beginning the first calendar quarter after

June 30, 2015 in which the reserve ratio of the DIF reaches or exceeds 1.15 percent in the previous calendar quarter, the total base assessment rates after adjustments for a new small institution shall be the rate prescribed in the following schedule, even if the reserve ratio equals or exceeds 2 percent or 2.5 percent.

**TOTAL BASE ASSESSMENT RATE SCHEDULE (AFTER ADJUSTMENTS) \* IF RESERVE RATIO FOR PRIOR ASSESSMENT PERIOD IS EQUAL TO OR GREATER THAN 1.15 PERCENT \*\***

	Risk category I	Risk category II	Risk category III	Risk category IV
Initial Assessment Rate .....	7 .....	12 .....	19 .....	30.
Brokered Deposit Adjustment (added) .....	N/A .....	0 to 10 .....	0 to 10 .....	0 to 10.
Total Assessment Rate .....	7 .....	12 to 22 .....	19 to 29 .....	30 to 40.

\* The depository institution debt adjustment, which is not included in the table, can increase total base assessment rates above the maximum assessment rates shown in the table.

\*\* All amounts for all risk categories are in basis points annually. Total base rates that are not the minimum or maximum rate will vary between these rates.

(1) Risk Category I Total Assessment Rate Schedule. The annual total base assessment rates for all new small institutions in Risk Category I shall be 7 basis points.

assessment rates for all new small institutions in Risk Category III shall range from 19 to 29 basis points.

(4) Risk Category IV Total Assessment Rate Schedule. The annual total base assessment rates for all new small institutions in Risk Category IV shall range from 30 to 40 basis points.

(2) *Insured branches of foreign banks—(i) Assessment rate schedule for insured branches of foreign banks once the reserve ratio of the DIF first reaches*

*1.15 percent, and the reserve ratio for the immediately prior assessment period is less than 2 percent. Once the reserve ratio of the DIF first reaches 1.15 percent, and the reserve ratio for the immediately prior assessment period is less than 2 percent, the initial and total base assessment rates for an insured branch of a foreign bank, except as provided in paragraph (f) of this section, shall be the rate prescribed in the following schedule.*

**INITIAL AND TOTAL BASE ASSESSMENT RATE SCHEDULE \* ONCE THE RESERVE RATIO OF THE DIF REACHES 1.15 PERCENT AND THE RESERVE RATIO FOR THE IMMEDIATELY PRIOR ASSESSMENT PERIOD IS LESS THAN 2 PERCENT \*\***

	Risk category I	Risk category II	Risk category III	Risk category IV
Initial and Total Assessment Rate .....	3 to 7	12	19	30

\* The depository institution debt adjustment, which is not included in the table, can increase total base assessment rates above the maximum assessment rates shown in the table.

\*\* All amounts for all risk categories are in basis points annually. Initial and total base rates that are not the minimum or maximum rate will vary between these rates.

(A) Risk Category I Initial and Total Base Assessment Rate Schedule. The

annual initial and total base assessment rates for an insured branch of a foreign

bank in Risk Category I shall range from 3 to 7 basis points.

(B) Risk Category II, III, and IV Initial and Total Base Assessment Rate Schedule. The annual initial and total base assessment rates for Risk Categories II, III, and IV shall be 12, 19, and 30 basis points, respectively.

(C) All insured branches of foreign banks in any one risk category, other than Risk Category I, will be charged the

same initial base assessment rate, subject to adjustment as appropriate.

(ii) *Assessment rate schedule for insured branches of foreign banks if the reserve ratio of the DIF for the prior assessment period is equal to or greater than 2 percent and less than 2.5 percent.* If the reserve ratio of the DIF for the prior assessment period is equal

to or greater than 2 percent and less than 2.5 percent, the initial and total base assessment rates for an insured branch of a foreign bank, except as provided in paragraph (f), shall be the rate prescribed in the following schedule.

**INITIAL AND TOTAL BASE ASSESSMENT RATE SCHEDULE \* IF RESERVE RATIO FOR PRIOR ASSESSMENT PERIOD IS EQUAL TO OR GREATER THAN 2 PERCENT BUT LESS THAN 2.5 PERCENT \*\***

	Risk category I	Risk category II	Risk category III	Risk category IV
Initial and Total Assessment Rate .....	2 to 6	10	17	28

\* The depository institution debt adjustment, which is not included in the table, can increase total base assessment rates above the maximum assessment rates shown in the table.

\*\* All amounts for all risk categories are in basis points annually. Initial and total base rates that are not the minimum or maximum rate will vary between these rates.

(A) Risk Category I Initial and Total Base Assessment Rate Schedule. The annual initial and total base assessment rates for an insured branch of a foreign bank in Risk Category I shall range from 2 to 6 basis points.

(B) Risk Category II, III, and IV Initial and Total Base Assessment Rate Schedule. The annual initial and total base assessment rates for Risk Categories

II, III, and IV shall be 10, 17, and 28 basis points, respectively.

(C) All insured branches of foreign banks in any one risk category, other than Risk Category I, will be charged the same initial base assessment rate, subject to adjustment as appropriate.

(iii) *Assessment rate schedule for insured branches of foreign banks if the reserve ratio of the DIF for the prior*

*assessment period is greater than 2.5 percent.* If the reserve ratio of the DIF for the prior assessment period is greater than 2.5 percent, the initial and total base assessment rate for an insured branch of foreign bank, except as provided in paragraph (f) of this section, shall be the rate prescribed in the following schedule:

**INITIAL AND TOTAL BASE ASSESSMENT RATE SCHEDULE \* IF RESERVE RATIO FOR PRIOR ASSESSMENT PERIOD IS GREATER THAN OR EQUAL TO 2.5 PERCENT \*\***

	Risk category I	Risk category II	Risk category III	Risk category IV
Initial Assessment Rate .....	1 to 5	9	15	25

\* The depository institution debt adjustment, which is not included in the table, can increase total base assessment rates above the maximum assessment rates shown in the table.

\*\* All amounts for all risk categories are in basis points annually. Initial and total base rates that are not the minimum or maximum rate will vary between these rates.

(A) Risk Category I Initial and Total Base Assessment Rate Schedule. The annual initial and total base assessment rates for an insured branch of a foreign bank in Risk Category I shall range from 1 to 5 basis points.

(B) Risk Category II, III, and IV Initial and Total Base Assessment Rate Schedule. The annual initial and total base assessment rates for Risk Categories II, III, and IV shall be 9, 15, and 25 basis points, respectively.

(C) All insured branches of foreign banks in any one risk category, other than Risk Category I, will be charged the same initial base assessment rate, subject to adjustment as appropriate.

(f) Total Base Assessment Rate Schedule adjustments and procedures—  
(1) Board Rate Adjustments. The Board may increase or decrease the total base assessment rate schedule in paragraphs

(a) through (e) of this section up to a maximum increase of 2 basis points or a fraction thereof or a maximum decrease of 2 basis points or a fraction thereof (after aggregating increases and decreases), as the Board deems necessary. Any such adjustment shall apply uniformly to each rate in the total base assessment rate schedule. In no case may such rate adjustments result in a total base assessment rate that is mathematically less than zero or in a total base assessment rate schedule that, at any time, is more than 2 basis points above or below the total base assessment schedule for the Deposit Insurance Fund in effect pursuant to paragraph (b) of this section, nor may any one such adjustment constitute an increase or decrease of more than 2 basis points.

(2) Amount of revenue. In setting assessment rates, the Board shall take into consideration the following:

(i) Estimated operating expenses of the Deposit Insurance Fund;  
(ii) Case resolution expenditures and income of the Deposit Insurance Fund;  
(iii) The projected effects of assessments on the capital and earnings of the institutions paying assessments to the Deposit Insurance Fund;  
(iv) The risk factors and other factors taken into account pursuant to 12 U.S.C. 1817(b)(1); and  
(v) Any other factors the Board may deem appropriate.

(3) Adjustment procedure. Any adjustment adopted by the Board pursuant to this paragraph will be adopted by rulemaking, except that the Corporation may set assessment rates as necessary to manage the reserve ratio,

within set parameters not exceeding cumulatively 2 basis points, pursuant to paragraph (f)(1) of this section, without further rulemaking.

(4) Announcement. The Board shall announce the assessment schedules and the amount and basis for any adjustment thereto not later than 30 days before the quarterly certified statement invoice date specified in § 327.3(b) of this part for the first assessment period for which the adjustment shall be effective. Once set, rates will remain in effect until changed by the Board.

■ 8. Add Appendix E to part 327 to read as follows:

## Appendix E—Method To Derive Pricing Multipliers and Uniform Amount

### I. Introduction

The uniform amount and pricing multipliers are derived from:

- A model (the Statistical Model) that estimates the probability of failure of an institution over a three-year horizon;

- The minimum initial base assessment rate;
- The maximum initial base assessment rate;
- Thresholds marking the points at which the maximum and minimum assessment rates become effective.

### II. The Statistical Model

The Statistical Model estimates the probability of an insured depository institution failing within three years using a logistic regression and pooled time-series cross-sectional data;<sup>1</sup> that is, the dependent variable in the estimation is whether an insured depository institution failed during the following three-year period. Actual model parameters for the Statistical Model are an average of each of three regression estimates for each parameter. Each of the three regressions uses end-of-year data from insured depository institutions' quarterly reports of condition and income (Call Reports and Thrift Financial Reports or TFRs<sup>2</sup>) for every third year to estimate probability of failure within the ensuing three years. One regression (Regression 1) uses insured

depository institutions' Call Report and TFR data for the end of 1985 and failures from 1986 through 1988; Call Report and TFR data for the end of 1988 and failures from 1989 through 1991; and so on, ending with Call Report data for the end of 2009 and failures from 2010 through 2012. The second regression (Regression 2) uses insured depository institutions' Call Report and TFR data for the end of 1986 and failures from 1987 through 1989, and so on, ending with Call Report data for the end of 2010 and failures from 2011 through 2013. The third regression (Regression 3) uses insured depository institutions' Call Report and TFR data for the end of 1987 and failures from 1988 through 1990, and so on, ending with Call Report data for the end of 2011 and failures from 2012 through 2014. The regressions include only Call Report data and failures for established small institutions.

Table E.1 lists and defines the explanatory variables (regressors) in the Statistical Model and the measures used in Sec. 327.16(a)(1).

TABLE E.1—DEFINITIONS OF REGRESSORS

Variables	Description
Tier 1 Leverage Ratio (%) .....	Tier 1 capital divided by adjusted average assets. (Numerator and denominator are both based on the definition for prompt corrective action.)
Net Income before Taxes/Total Assets (%) .....	Income (before income taxes and extraordinary items and other adjustments) for the most recent twelve months divided by total assets. <sup>1</sup>
Nonperforming Loans and Leases/Gross Assets (%) .....	Sum of total loans and lease financing receivables past due 90 or more days and still accruing interest and total nonaccrual loans and lease financing receivables (excluding, in both cases, the maximum amount recoverable from the U.S. Government, its agencies or government-sponsored enterprises, under guarantee or insurance provisions) divided by gross assets. <sup>2 3</sup>
Other Real Estate Owned/Gross Assets (%) .....	Other real estate owned divided by gross assets. <sup>2</sup>
Core Deposits/Total Assets (%) .....	Domestic office deposits (excluding time deposits over the standard maximum deposit insurance amount) divided by total assets.
Weighted Average of C, A, M, E, L, and S Component Ratings .....	The weighted sum of the "C," "A," "M," "E," "L," and "S" CAMELS components, with weights of 25 percent each for the "C" and "M" components, 20 percent for the "A" component, and 10 percent each for the "E," "L," and "S" components. In instances where the "S" component is missing, the remaining components are scaled by a factor of 10/9. <sup>4</sup>
Loan Mix Index .....	A measure of credit risk described below.
Asset Growth (%) .....	Growth in assets (adjusted for mergers <sup>5</sup> ) over the previous year. If growth is negative, then the value is set to zero. <sup>6</sup>

<sup>1</sup> For purposes of calculating actual assessment rates (as opposed to model estimation), the ratio of Net Income Before Taxes to Total Assets is bounded below by (and cannot be less than) –25 percent and is bounded above by (and cannot exceed) 3 percent.

<sup>2</sup> For purposes of calculating actual assessment rates (as opposed to model estimation), "Gross assets" are total assets plus the allowance for loan and lease financing receivable losses (ALLL); for purposes of estimating the Statistical Model, for years before 2001, when allocated transfer risk was not included in ALLL in Call Reports, allocated transfer risk is included in gross assets separately.

<sup>3</sup> Delinquency and non-accrual data on government guaranteed loans are not available for the entire estimation period. As a result, the Statistical Model is estimated without deducting delinquent or past-due government guaranteed loans from the nonperforming loans and leases to gross assets ratio.

<sup>4</sup> The component rating for sensitivity to market risk (the "S" rating) is not available for years before 1997. As a result, and as described in the table, the Statistical Model is estimated using a weighted average of five component ratings excluding the "S" component where the component is not available.

<sup>5</sup> Growth in assets is also adjusted for acquisitions of failed banks.

<sup>6</sup> For purposes of calculating actual assessment rates (as opposed to model estimation), Asset Growth is bounded above by (and cannot exceed) 190 percent.

<sup>1</sup> Tests for the statistical significance of parameters use adjustments discussed by Tyler Shumway (2001) "Forecasting Bankruptcy More

Accurately: A Simple Hazard Model," *Journal of Business* 74:1, 101–124.

<sup>2</sup> Beginning in 2012, all insured depository institutions began filing quarterly Call Reports and the TFR was no longer filed.

The financial variable regressors used to estimate the failure probabilities are obtained from Call Reports and TFRs. The weighted average of the “C,” “A,” “M,” “E,” “L,” and “S” component ratings regressor is based on component ratings obtained from the most recent bank examination conducted within 24 months before the date of the Call Report or TFR.

The Loan Mix Index assigns loans to the categories of loans described in Table E.2. For each loan category, a charge-off rate is calculated for each year from 2001 through 2014. The charge-off rate for each year is the aggregate charge-off rate on all such loans held by small institutions in that year. A weighted average charge-off rate is then calculated for each loan category, where the weight for each year is based on the number of small-bank failures during that year.<sup>3</sup> A Loan Mix Index for each established small institution is calculated by: (1) Multiplying the ratio of the institution’s amount of loans in a particular loan category to its total assets by the associated weighted average charge-off

rate for that loan category; and (2) summing the products for all loan categories. Table E.2 gives the weighted average charge-off rate for each category of loan, as calculated through the end of 2014. The Loan Mix Index excludes credit card loans.

TABLE E.2—LOAN MIX INDEX CATEGORIES

	Weighted charge-off rate percent
Construction & Development	4.4965840
Commercial & Industrial .....	1.5984506
Leases .....	1.4974551
Other Consumer .....	1.4559717
Loans to Foreign Govern-	
ment .....	1.3384093
Real Estate Loans Residual	1.0169338
Multifamily Residential .....	0.8847597
Nonfarm Nonresidential .....	0.7286274
1–4 Family Residential .....	0.6973778

TABLE E.2—LOAN MIX INDEX CATEGORIES—Continued

	Weighted charge-off rate percent
Loans to Depository banks ...	0.5760532
Agricultural Real Estate .....	0.2376712
Agricultural .....	0.2432737

For each of the three regression estimates (Regression 1, Regression 2 and Regression 3), the estimated probability of failure (over a three-year horizon) of institution  $i$  at time  $T$  is

*Equation 1*

$$P_{iT} = 1 / ((1 + \exp(-Z_{iT}))$$

where

*Equation 2*

$$Z_{iT} = \beta_0 + \beta_1 (\text{Tier 1 Leverage Ratio}_{iT}) + \beta_2 (\text{Nonperforming loans and leases ratio}_{iT}) + \beta_3 (\text{Other real estate owned ratio}_{iT}) + \beta_4 (\text{Net income before taxes ratio}_{iT}) + \beta_5 (\text{Core deposits ratio}_{iT}) + \beta_6 (\text{Weighted average CAMELS component rating}_{iT}) + \beta_7 (\text{Loan mix index}_{iT}) + \beta_8 (\text{Asset growth}_{iT})$$

where the  $\beta$  variables are parameter estimates. As stated earlier, for actual assessments, the  $\beta$  values that are applied are averages of each of the individual parameters over three separate regressions. Pricing

multipliers (discussed in the next section) are based on  $Z_{iT}$ .<sup>4</sup>

### III. Derivation of Uniform Amount and Pricing Multipliers

The uniform amount and pricing multipliers used to compute the annual

initial base assessment rate in basis points,  $R_{iT}$ , for any such institution  $i$  at a given time  $T$  will be determined from the Statistical<sup>5</sup> Model as follows:

*Equation 3*

$$R_{iT} = \alpha_0 + \alpha_1 * Z_{iT} \text{ subject to } Min \leq R_{iT} \leq Max^5$$

where  $\alpha_0$  and  $\alpha_1$  are a constant term and a scale factor used to convert  $Z_{iT}$  to an assessment rate,  $Max$  is the maximum initial base assessment rate in effect and  $Min$  is the minimum initial base assessment rate in effect. ( $R_{iT}$  is expressed as an annual rate, but

the actual rate applied in any quarter will be  $R_{iT}/4$ .)

Solving equation 3 for minimum and maximum initial base assessment rates simultaneously,  $Min = \alpha_0 + \alpha_1 * Z_N$  and  $Max = \alpha_0 + \alpha_1 * Z_X$

where  $Z_X$  is the value of  $Z_{iT}$  above which the maximum initial assessment rate ( $Max$ ) applies and  $Z_N$  is the value of  $Z_{iT}$  below which the minimum initial assessment rate ( $Min$ ) applies, results in values for the constant amount,  $\alpha_0$ , and the scale factor,  $\alpha_1$ :

<sup>3</sup> An exception is “Real Estate Loans Residual,” which consists of real estate loans held in foreign offices. Few small insured depository institutions report this item and a statistically reliable estimate of the weighted average charge-off rate could not be obtained. Instead, a weighted average of the weighted average charge-off rates of the other real estate loan categories is used. (The other categories

are construction & development, multifamily residential, nonfarm nonresidential, 1–4 family residential, and agricultural real estate.) The weight for each of the other real estate loan categories is based on the aggregate amount of the loans held by small insured depository institutions as of December 31, 2014.

<sup>4</sup> The  $Z_{iT}$  values have the same rank ordering as the probability measures  $P_{iT}$ .

<sup>5</sup>  $R_{iT}$  is also subject to the minimum and maximum assessment rates applicable to established small institutions based upon their CAMELS composite ratings.

*Equation 4*

$$\alpha_0 = \text{Min} - \frac{Z_N * (\text{Max} - \text{Min})}{Z_X - Z_N}$$

and *Equation 5*

$$\alpha_1 = \frac{\text{Max} - \text{Min}}{Z_X - Z_N}$$

The values for  $Z_X$  and  $Z_N$  will be selected to ensure that, for an assessment period shortly before adoption of a final rule, aggregate assessments for all established small institutions would have been approximately the same under the final rule as they would have been under the

assessment rate schedule that, under rules in effect before adoption of the final rule, would have automatically gone into effect when the reserve ratio reached 1.15 percent. As an example, using aggregate assessments for all established small institutions for the fourth quarter of 2014 to determine  $Z_X$  and  $Z_N$ , and

assuming that *Min* had equaled 3 basis points and *Max* had equaled 30 basis points, the value of  $Z_X$  would have been 0.49 and  $Z_N = 6.60$ . Hence based on equations 4 and 5,  $\alpha_0 = 28.134$  and  $\alpha_1 = 3.808$ .

Therefore from equation 3, it follows that

*Equation 6*

$$R_{iT} = 28.134 + 3.808 * Z_{iT} \text{ subject to } 3 \leq R_{iT} \leq 30$$

Substituting equation 2 produces an annual initial base assessment rate for institution  $i$  at

time  $T$ ,  $R_{iT}$ , in terms of the uniform amount, the pricing multipliers and model variables:

*Equation 7*

$$R_{iT} = [28.134 + 3.808 * \beta_0] + 3.808 * [\beta_1 (\text{Tier 1 leverage ratio}_{iT})] + 3.808 * \beta_2 (\text{Nonperforming loans and leases ratio}_{iT}) + 3.808 * \beta_3 (\text{Other real estate owned ratio}_{iT}) + 3.808 * \beta_4 (\text{Net income before taxes ratio}_{iT}) + 3.808 * \beta_5 (\text{Core deposits ratio}_{iT}) + 3.808 * \beta_6 (\text{Weighted average CAMELS component rating}_{iT}) + 3.808 * \beta_7 (\text{Loan mix index}_{iT}) + 3.808 * \beta_8 (\text{Asset growth}_{iT})$$

again subject to  $3 \leq R_{iT} \leq 30$ <sup>6</sup> where  $28.134 + 3.808 * \beta_0$  equals the uniform amount,  $3.808 * \beta_j$  is a pricing multiplier for the associated risk measure  $j$ , and  $T$  is the date of the report of condition corresponding to the end of the quarter for which the assessment rate is computed.

Once the minimum and maximum cutoff values,  $Z_X$  and  $Z_N$ , are established as described in Section III of this Appendix, they will not change without additional notice-and-comment rulemaking. If *Max* (the maximum initial assessment rate) in effect or

*Min* (the minimum initial assessment rate) in effect change, the uniform amount and pricing multipliers will be recalculated as described in equations 3 through 7 without additional notice-and-comment rulemaking.

**IV. Updating the Statistical Model, Uniform Amount, and Pricing Multipliers**

The Statistical Model is estimated using year-end financial ratios and the weighted average of the “C,” “A,” “M,” “E” and “L” component ratings (and the “S” component where it was available) from the end of 1984 through the end of 2011, failure data from the 1985 through 2014 and data for the weighted average charge-off rates for the Loan Mix Index from 2001 through 2014. The FDIC may, from time to time, but no more

frequently than annually, re-estimate the Statistical Model with financial, failure and charge-off data from later years and publish a new Loan Mix Index, uniform amount and pricing multipliers based upon the methodology described in Sections I through III of this Appendix without further notice-and-comment rulemaking.

By order of the Board of Directors.

Dated at Washington, DC, this 16th day of June, 2015.

Federal Deposit Insurance Corporation.

**Robert Feldman,**

*Executive Secretary.*

[FR Doc. 2015–16514 Filed 7–10–15; 8:45 am]

**BILLING CODE 6714-01-P**

<sup>6</sup> As stated above,  $R_{iT}$  is also subject to the minimum and maximum assessment rates applicable to established small institutions based upon their CAMELS composite ratings.

# Reader Aids

## Federal Register

Vol. 80, No. 133

Monday, July 13, 2015

### CUSTOMER SERVICE AND INFORMATION

#### Federal Register/Code of Federal Regulations

General Information, indexes and other finding aids **202-741-6000****Laws** **741-6000**

#### Presidential Documents

Executive orders and proclamations **741-6000****The United States Government Manual** **741-6000**

#### Other Services

Electronic and on-line services (voice) **741-6020**Privacy Act Compilation **741-6064**Public Laws Update Service (numbers, dates, etc.) **741-6043**TTY for the deaf-and-hard-of-hearing **741-6086**

### ELECTRONIC RESEARCH

#### World Wide Web

Full text of the daily Federal Register, CFR and other publications is located at: [www.fdsys.gov](http://www.fdsys.gov).Federal Register information and research tools, including Public Inspection List, indexes, and Code of Federal Regulations are located at: [www.ofr.gov](http://www.ofr.gov).

#### E-mail

**FEDREGTOC-L** (Federal Register Table of Contents LISTSERV) is an open e-mail service that provides subscribers with a digital form of the Federal Register Table of Contents. The digital form of the Federal Register Table of Contents includes HTML and PDF links to the full text of each document.To join or leave, go to <http://listserv.access.gpo.gov> and select *Online mailing list archives, FEDREGTOC-L, Join or leave the list (or change settings)*; then follow the instructions.**PENS** (Public Law Electronic Notification Service) is an e-mail service that notifies subscribers of recently enacted laws.To subscribe, go to <http://listserv.gsa.gov/archives/publaws-l.html> and select *Join or leave the list (or change settings)*; then follow the instructions.**FEDREGTOC-L** and **PENS** are mailing lists only. We cannot respond to specific inquiries.**Reference questions.** Send questions and comments about the Federal Register system to: [fedreg.info@nara.gov](mailto:fedreg.info@nara.gov)

The Federal Register staff cannot interpret specific documents or regulations.

**CFR Checklist.** Effective January 1, 2009, the CFR Checklist no longer appears in the Federal Register. This information can be found online at <http://bookstore.gpo.gov/>.

### FEDERAL REGISTER PAGES AND DATE, JULY

37529-37920.....	1
37921-38390.....	2
38391-38612.....	6
38613-38912.....	7
38913-39376.....	8
39377-39668.....	9
39669-39940.....	10
39941-40894.....	13

### CFR PARTS AFFECTED DURING JULY

At the end of each month the Office of the Federal Register publishes separately a List of CFR Sections Affected (LSA), which lists parts and sections affected by documents published since the revision date of each title.

<b>3 CFR</b>	748.....39950
	774.....39950
<b>Executive Orders:</b>	
13699.....	37529
<b>Administrative Orders:</b>	
1.....	37921
<b>5 CFR</b>	
<b>Proposed Rules:</b>	
1600.....	39974
1601.....	39974
1651.....	39974
1653.....	39975
Ch. XXII.....	38019
<b>7 CFR</b>	
929.....	37531
932.....	37533
4279.....	39377
4287.....	39377
<b>Proposed Rules:</b>	
986.....	38021
1211.....	37555
<b>9 CFR</b>	
94.....	37923, 37935
112.....	39669
<b>10 CFR</b>	
430.....	37953, 37954
<b>Proposed Rules:</b>	
Ch. II.....	38019
Ch. III.....	38019
Ch. IX.....	38019
429.....	39486, 39644
430.....	39644
431.....	38032, 39486
1703.....	39389
<b>12 CFR</b>	
<b>Proposed Rules:</b>	
Ch. I.....	39390
Ch. II.....	39390
Ch. III.....	39390
327.....	40838
701.....	37898
723.....	37898
741.....	37898
<b>14 CFR</b>	
33.....	38913
39.....	38391, 38613, 38615,
	38617, 39941, 39943
<b>Proposed Rules:</b>	
39.....	38033, 38036, 38038,
	38406, 38408, 38656, 38990,
	38992, 39392, 39394
<b>15 CFR</b>	
736.....	39950
740.....	39950
744.....	39950
<b>16 CFR</b>	
<b>Proposed Rules:</b>	
313.....	38410
1112.....	38041
1233.....	38041
<b>17 CFR</b>	
231.....	37536
232.....	37537
241.....	37536
271.....	37536
275.....	37538
276.....	37536
<b>Proposed Rules:</b>	
240.....	38995
275.....	38050
279.....	38050
<b>18 CFR</b>	
<b>Proposed Rules:</b>	
284.....	39719
342.....	39010
<b>19 CFR</b>	
201.....	39377
206.....	39377
208.....	39377
213.....	39377
214.....	39377
215.....	39377
216.....	39377
217.....	39377
218.....	39377
219.....	39377
220.....	39377
221.....	39377
222.....	39377
223.....	39377
224.....	39377
225.....	39377
226.....	39377
227.....	39377
228.....	39377
229.....	39377
230.....	39377
231.....	39377
232.....	39377
233.....	39377
234.....	39377
235.....	39377
236.....	39377
237.....	39377
238.....	39377
239.....	39377
240.....	39377
241.....	39377
242.....	39377
243.....	39377
244.....	39377
245.....	39377

246.....39377	<b>24 CFR</b>	<b>40 CFR</b>	502.....38153
247.....39377	<b>Proposed Rules:</b>	52.....37985, 38400, 38403,	<b>47 CFR</b>
248.....39377	203.....38410	38625, 38951, 38959, 38966,	1.....38653, 38812
249.....39377	<b>25 CFR</b>	38969, 39696, 39961, 39966,	2.....38812
250.....39377	83.....37538, 37862	39968, 39970	15.....37551
251.....39377	<b>26 CFR</b>	60.....38628	17.....37552
252.....39377	1.....38940, 38941	80.....38284	20.....38653
253.....39377	<b>Proposed Rules:</b>	81.....39970	25.....38812
254.....39377	1.....39397	180.....37547, 38976, 38981	27.....38812
255.....39377	301.....39397	257.....37988	74.....38812
256.....39377	602.....39397	262.....37992	76.....38001
257.....39377	<b>27 CFR</b>	761.....37994	78.....38812
258.....39377	<b>Proposed Rules:</b>	9.....40138	79.....39698
259.....39377	9.....38147	22.....40138	80.....38812
260.....39377	<b>28 CFR</b>	52.....38152, 38419, 38423,	87.....38812
261.....39377	527.....38620	39020	90.....38812
262.....39377	571.....38622	85.....40138	97.....38812
263.....39377	<b>Proposed Rules:</b>	86.....40138	101.....38812
264.....39377	506.....38658	87.....37758	<b>Proposed Rules:</b>
265.....39377	810.....39400	600.....40138	2.....38316
266.....39377	<b>29 CFR</b>	704.....38153	8.....38424
267.....39377	18.....37539	1033.....40138	15.....38316
268.....39377	<b>Proposed Rules:</b>	1036.....40138	73.....38158
269.....39377	541.....38516	1037.....40138	74.....38158
270.....39377	<b>31 CFR</b>	1039.....40138	79.....39722
271.....39377	591.....39676	1042.....40138	80.....38316
272.....39377	<b>Proposed Rules:</b>	1043.....40138	90.....38316
273.....39377	315.....37539	1065.....40138	97.....38316
274.....39377	353.....37539	1066.....40138	101.....38316
275.....39377	360.....37539	1068.....37758, 40138	<b>48 CFR</b>
276.....39377	<b>32 CFR</b>	<b>41 CFR</b>	Ch. 1.....38292, 38313
277.....39377	323.....39381	301.....37995	1.....38293, 38306
278.....39377	<b>33 CFR</b>	302.....37995	2.....38293
279.....39377	100.....38394, 38397, 39382	303.....37995	3.....38293
280.....39377	117.....39382, 39383, 39683	304.....37995	4.....38293
281.....39377	165.....37540, 37542, 37545,	305.....37995	5.....38307
282.....39377	37976, 37978, 37980, 37982,	306.....37995	6.....38293
283.....39377	38623, 38941, 38943, 38944,	307.....37995	7.....38293
284.....39377	38946, 39383, 39384, 39386,	308.....37995	8.....38293
285.....39377	39686, 39688, 39689, 39691,	309.....37995	9.....38293, 38309
286.....39377	39694, 39957, 39960, 39961	310.....37995	10.....38293
287.....39377	<b>Proposed Rules:</b>	<b>Proposed Rules:</b>	12.....38293, 38311
288.....39377	117.....38417	102–177.....39719	13.....38293, 38311
289.....39377	165.....37562, 39400, 39403	<b>42 CFR</b>	15.....38293, 38312
290.....39377	<b>34 CFR</b>	<b>Proposed Rules:</b>	16.....38293
291.....39377	668.....39608	88.....39720	17.....38293
292.....39377	682.....39608	409.....39840	18.....38311
293.....39377	685.....39608	410.....39200	19.....38293
294.....39377	<b>36 CFR</b>	412.....39200	22.....38293, 38307
295.....39377	<b>Proposed Rules:</b>	413.....37808	25.....38293
296.....39377	7.....39985	416.....39200	28.....38293
297.....39377	13.....39988	419.....39200	30.....38293
298.....39377	<b>38 CFR</b>	424.....39840	42.....38293
299.....39377	<b>Proposed Rules:</b>	484.....39840	50.....38293
<b>20 CFR</b>	4.....39011	<b>43 CFR</b>	52.....38293, 38306, 38309,
404.....37970	<b>39 CFR</b>	<b>Proposed Rules:</b>	38312
416.....37970	<b>Proposed Rules:</b>	47.....39991	53.....38293
<b>21 CFR</b>	957.....37565	48.....39991	<b>49 CFR</b>
11.....39675	961.....37567	3160.....40768	219.....38654
20.....38915	966.....37567	3170.....40768	390.....37553
101.....39675	<b>44 CFR</b>	<b>45 CFR</b>	<b>Proposed Rules:</b>
310.....38915	64.....37996	155.....38652	190.....39916
314.....38915	<b>46 CFR</b>	<b>Proposed Rules:</b>	191.....39916
600.....38915	503.....37997	501.....38153	192.....39916
601.....37971	<b>Proposed Rules:</b>		195.....39916
610.....37971	501.....38153		199.....39916
680.....37971			512.....40138
<b>Proposed Rules:</b>			523.....40138
601.....38145			534.....40138
1100.....37555			535.....40138
1140.....37555			537.....40138
1143.....37555			538.....40138
<b>22 CFR</b>			1201.....39021
121.....37974			



---

1241.....	39045	1247.....	39045	622.....	38015, 39715	<b>Proposed Rules:</b>	
1242.....	39045	1248.....	39045	635.....	38016	17.....	37568
1243.....	39045			660.....	39716	219.....	39542
1244.....	39045	<b>50 CFR</b>		679.....	38017	648.....	39731
1245.....	39045	21.....	38013			679.....	39734
1246.....	39045	300.....	38986				

---

**LIST OF PUBLIC LAWS**

---

**Note:** No public bills which have become law were received by the Office of the Federal Register for inclusion

in today's **List of Public Laws**.

Last List July 9, 2015

---

**Public Laws Electronic Notification Service (PENS)**

---

**PENS** is a free electronic mail notification service of newly

enacted public laws. To subscribe, go to <http://listserv.gsa.gov/archives/publaws-l.html>

**Note:** This service is strictly for E-mail notification of new laws. The text of laws is not available through this service. **PENS** cannot respond to specific inquiries sent to this address.