

NATIONAL BUREAU OF STANDARDS REPORT

4086

**RESULTS OF STATIC LOADING TESTS OF
ELFACA GRATINGS BY AIRCRAFT TIRES**

by

L. K. Irwin

Report to
Equipment Laboratory
Wright Air Development Center
Department of the Air Force



**U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS**

U. S. DEPARTMENT OF COMMERCE

Sinclair Weeks, *Secretary*

NATIONAL BUREAU OF STANDARDS

A. V. Astin, *Director*



THE NATIONAL BUREAU OF STANDARDS

The scope of activities of the National Bureau of Standards is suggested in the following listing of the divisions and sections engaged in technical work. In general, each section is engaged in specialized research, development, and engineering in the field indicated by its title. A brief description of the activities, and of the resultant reports and publications, appears on the inside of the back cover of this report.

Electricity and Electronics. Resistance and Reactance. Electron Tubes. Electrical Instruments. Magnetic Measurements. Process Technology. Engineering Electronics. Electronic Instrumentation. Electrochemistry.

Optics and Metrology. Photometry and Colorimetry. Optical Instruments. Photographic Technology. Length. Engineering Metrology.

Heat and Power. Temperature Measurements. Thermodynamics. Cryogenic Physics. Engines and Lubrication. Engine Fuels.

Atomic and Radiation Physics. Spectroscopy. Radiometry. Mass Spectrometry. Solid State Physics. Electron Physics. Atomic Physics. Nuclear Physics. Radioactivity. X-rays. Betatron. Nucleonic Instrumentation. Radiological Equipment. AEC Radiation Instruments.

Chemistry. Organic Coatings. Surface Chemistry. Organic Chemistry. Analytical Chemistry. Inorganic Chemistry. Electrodeposition. Gas Chemistry. Physical Chemistry. Thermochemistry. Spectrochemistry. Pure Substances.

Mechanics. Sound. Mechanical Instruments. Fluid Mechanics. Engineering Mechanics. Mass and Scale. Capacity, Density, and Fluid Meters. Combustion Controls.

Organic and Fibrous Materials. Rubber. Textiles. Paper. Leather. Testing and Specifications. Polymer Structure. Organic Plastics. Dental Research.

Metallurgy. Thermal Metallurgy. Chemical Metallurgy. Mechanical Metallurgy. Corrosion. Mineral Products. Porcelain and Pottery. Glass. Refractories. Enameled Metals. Concreting Materials. Constitution and Microstructure.

Building Technology. Structural Engineering. Fire Protection. Heating and Air Conditioning. Floor, Roof, and Wall Coverings. Codes and Specifications.

Applied Mathematics. Numerical Analysis. Computation. Statistical Engineering. Mathematical Physics.

Data Processing Systems. Components and Techniques. Digital Circuitry. Digital Systems. Analogue Systems.

Cryogenic Engineering. Cryogenic Equipment. Cryogenic Processes. Properties of Materials. Gas Liquefaction.

Radio Propagation Physics. Upper Atmosphere Research. Ionospheric Research. Regular Propagation Services.

Radio Propagation Engineering. Frequency Utilization Research. Tropospheric Propagation Research.

Radio Standards. High Frequency Standards. Microwave Standards.

● Office of Basic Instrumentation

● Office of Weights and Measures

NATIONAL BUREAU OF STANDARDS REPORT

NBS PROJECT

NBS REPORT

0201-20-2331

May 1955

4086

RESULTS OF STATIC LOADING TESTS OF ELFACA GRATINGS BY AIRCRAFT TIRES

by

L. K. Irwin
Engineering Mechanics Section
Mechanics Division

To

Equipment Laboratory
Wright Air Development Center
Department of the Air Force

NBS Lab. No. 6.4/2-85-2



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

The publication, reprinting,
or otherwise use of this report
without permission is prohibited
by the National Institute of
Standards and Technology (NIST)
on October 9, 2015

Approved for public release by the
director of the National Institute of
Standards and Technology (NIST)
on October 9, 2015

Part, is prohibited
ards, Washington
t has been specifi-
t for its own use.

1. The first part of the paper is devoted to a general discussion of the problem of the existence of solutions of the system of equations

(1.1)

where $\mathbf{A}$ is a matrix of order n , $\mathbf{b}$ is a vector of order n , and $\mathbf{x}$ is a vector of order n .

2. In the second part of the paper we consider the case when the matrix $\mathbf{A}$ is symmetric and positive definite.

3. In the third part of the paper we consider the case when the matrix $\mathbf{A}$ is symmetric and negative definite.

4. In the fourth part of the paper we consider the case when the matrix $\mathbf{A}$ is symmetric and indefinite.

5. In the fifth part of the paper we consider the case when the matrix $\mathbf{A}$ is nonsymmetric.

6. In the sixth part of the paper we consider the case when the matrix $\mathbf{A}$ is singular.

7. In the seventh part of the paper we consider the case when the matrix $\mathbf{A}$ is non-square.

8. In the eighth part of the paper we consider the case when the matrix $\mathbf{A}$ is complex.

9. In the ninth part of the paper we consider the case when the matrix $\mathbf{A}$ is real.

10. In the tenth part of the paper we consider the case when the matrix $\mathbf{A}$ is rational.

11. In the eleventh part of the paper we consider the case when the matrix $\mathbf{A}$ is irrational.

12. In the twelfth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic.

13. In the thirteenth part of the paper we consider the case when the matrix $\mathbf{A}$ is transcendental.

14. In the fourteenth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

15. In the fifteenth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

16. In the sixteenth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

17. In the seventeenth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

18. In the eighteenth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

19. In the nineteenth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

20. In the twentieth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

21. In the twenty-first part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

22. In the twenty-second part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

23. In the twenty-third part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

24. In the twenty-fourth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

25. In the twenty-fifth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

26. In the twenty-sixth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

27. In the twenty-seventh part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

28. In the twenty-eighth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

29. In the twenty-ninth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

30. In the thirtieth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

31. In the thirty-first part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

32. In the thirty-second part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

33. In the thirty-third part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

34. In the thirty-fourth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

35. In the thirty-fifth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

36. In the thirty-sixth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

37. In the thirty-seventh part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

38. In the thirty-eighth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

39. In the thirty-ninth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

40. In the fortieth part of the paper we consider the case when the matrix $\mathbf{A}$ is algebraic and transcendental.

RESULTS OF STATIC LOADING TESTS OF ELFACA GRATINGS BY AIRCRAFT TIRES

by

L. K. Irwin

1. INTRODUCTION

The need for illumination without obstructions on or very near to runways and deceleration areas of airports led to the design of a system of recessed lights with steel grids or gratings to protect the lights from aircraft tires. Limited use has been made of gratings with the trade name "Elfaca" at overseas installations. The performance of these gratings has not been determined and evaluated for the large variety of tire sizes and landing and deceleration loads that can be expected in civil and military aircraft.

At the request of the Equipment Laboratory, Wright Air Development Center, tests with static loads were undertaken to study the effects of Elfaca gratings upon two sizes of aircraft tires.

2. TEST SAMPLES AND APPARATUS

The aircraft tires were sizes 20x4.4, 10-ply rating and 26x6.6, 12-ply rating. Two Elfaca gratings, designated types 0200-SB and 3130-E, were used. Compressive loads were applied to the tires and gratings with a testing machine of 10,000,000-lb capacity. An auxiliary load measuring system was placed in series with the reaction head and the loading fixture to indicate the loads applied by the machine with increased sensitivity. The test fixture, a 20x4.4 tire, a type 0200-SB grating and the load sensing devices are shown in figure 1. The load was applied by means of a test fixture of rolled steel sections and 1 1/4-inch steel plate to a steel shaft through the wheel. Precautions were taken to prevent motion of the test fixture parallel to the axis of the wheel. Deflection measurements were made during these tests with dial gages.

3. TEST PROCEDURES

The tires and gratings were set up in a compression testing machine so that the tires could be loaded by the gratings with various orientations of the bars relative to the tires. Also each tire was loaded on a flat steel plate to provide a base for comparing the load-deflection relations of the tire on the gratings. The test positions of each tire and grating combination are given in table 1.

Continuously increasing compressive loads were applied and values of load and deflection were determined simultaneously. The vertical deflections of the axis of the wheel relative to the top of the grating or flat plate were measured for all tests. Also the deflections of the tops of the bars parallel to the axis of the wheel were measured during tests 4 and 5 of the 26x6.6 tire.

The position of no load and zero deflection was taken to be that position in which the tire and one or more bars of the grating had made sufficient contact to prevent easy rotation of the wheel by hand. The air pressure in the tires with no load was measured periodically to be 155 lb/in² in the 20x4.4 and 165 lb/in² in the 26x6.6 tire.

4. RESULTS

4.1 Size 20x4.4 Tire

The tire was photographed for each test position while sustaining the rated static load, 3750 lb, and the maximum load applied. These load conditions are shown in figures 2 to 11, inclusive. Load-deflection curves for the 20x4.4 tire in the various test positions are shown in figure 12. The deflections for opposite sides of the tire were averaged for each load. The tests were stopped when it appeared that the wheel flange was bearing directly on double thicknesses of the casing and tube, or the deflections were large enough to cause the lower edge of the flange to be below the tops of the bars, see figure 11.

The deflections at the rated static load, 3750 lb, and the loads required to cause 2-inch deflection for the various test positions are listed in table 2.

4.2 Size 26x6.6 Tire

Photographs of the 26x6.6 tire in each test position while sustaining the rated static load, 8,000 lb, and the maximum load applied are shown in figures 13 to 22, inclusive. Load-deflection curves for this tire in each test position are given in figure 23. The deflection values are the average of measurements made on opposite sides of the tire. The tests were stopped at 20,000-lb load with the tire on a flat plate and at 18,000-lb load in the other test positions to avoid possible damage to the tire which might influence the results of subsequent tests.

The deflections measured at the rated static load, 8,000 lb, and the loads required to cause 3-in. deflection are given in table 2. The lateral deflections of the top of the bars as measured during tests 4 and 5 of the 26x6.6 tire, figures 19 through 22, ranged from 0.02 to 0.07 in. at the maximum test loads. Visual examination of the bars and gratings after the tests did not reveal any damage.

5. DISCUSSION

The load-deflection curves for the tests of the 20x4.4 tire on two Elfaca gratings indicate that when the tire is supported by one bar of the gratings and the load sustained by the tire and grating exceeds the rated static load, the deflections of the tire are sufficiently large that the flange of the wheel lies below the top of the grating as shown in figure 11. It seems likely that relatively large forces might result from operating conditions under which the wheel is required to climb out of the grating while sustaining maximum service loads. The magnitude and effects of these forces on the tire and aircraft should be determined analytically or experimentally.

The tests of the 26x6.6 tire on two Elfaca gratings indicate that the tire probably would traverse the two types of gratings considered without serious damage to either tire or grating.

Several factors which cannot be evaluated adequately from the static tests reported include

- (a) the tendency of rolling wheels to "track", that is, to travel parallel to the axes of bars while the main body of the aircraft travels skew to the axes of the bars.

- (b) the cutting action of the bars on the tread of skidding tires.
- (c) the forces developed in the undercarriage when tire is required to climb out of the grating.
- (d) the structural strength and stability of the bars which make up the grating when loads are applied skew to the axis of the maximum principal moment of inertia of the bars.

The effects of these factors should be determined analytically or experimentally.

For the Director,

B. L. Wilson

B. L. Wilson, Chief,
Engineering Mechanics Section,
Division of Mechanics.

Washington, D. C.

Table 1. Test Positions of 20x4.4 and 26x6.6 Tires On Elfaca Gratings

Test	Type of grating	No. of bars supporting tire	Average distance between bars under $\angle$ of wheel in.	Figure Nos.
20x4.4 Tire				
1	(a)	(a)	--	2, 3
2	0200-SB	2	2.51	4, 5
3	0200-SB	3	1.22	6, 7
4	3130-E	(b)	3.18	8, 9
5	3130-E	1	2.30	10, 11
26x6.6 Tire				
1	(a)	(a)	--	13, 14
2	3130-E	2	2.30	15, 16
3	3130-E	(b)	3.18	17, 18
4	3130-E	3	2.30	19, 20
5	0200-SB	5	1.22	21, 22

(a) Tire supported on flat plate

(b) Axis of tire at 45° to long dimension of bars

...

...

...

...

...

...

...

...

...

...

...

...

...

...

...

...

...

Table 2. Results of Static Load Tests of 20x4.4 and 26x6.6 Tires on Elfaca Gratings

Test	Deflection at rated static load in.	Load at 2 inches deflection lb	Load at 3 inches deflection lb	Maximum test load lb
20x4.4 Tire				
1	0.98	10,900	--	11,500
2	0.97	10,900(a)	--	10,000
3	1.12	8,100	--	11,000
4	1.29	6,600	--	9,000
5	1.93	3,900	--	5,800
26x6.6 Tire				
1	1.58	--	18,100	20,000
2	1.70	--	13,950	18,000
3	1.74	--	16,600	18,000
4	1.70	--	17,400	18,000
5	1.68	--	16,400	18,000

(a) Load-deflection curve extrapolated to obtain this value.

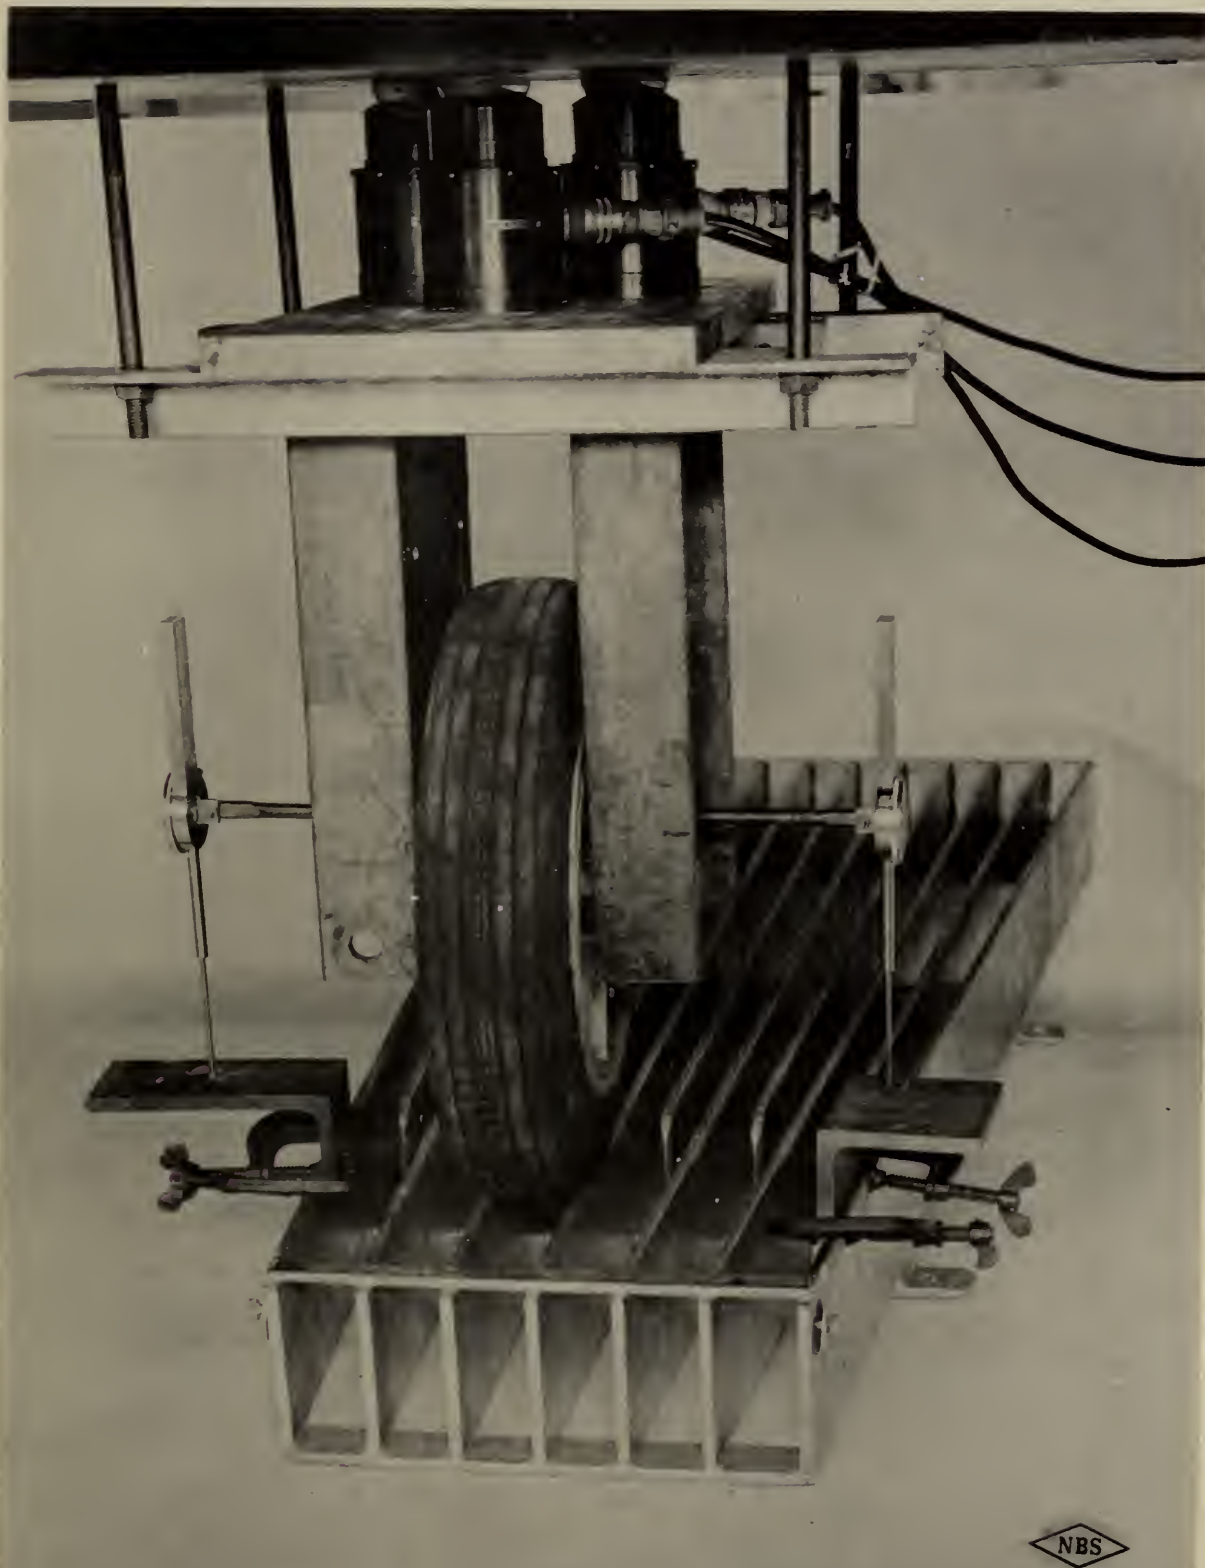


Figure 1. Test set-up of a 20x4.4 aircraft tire and a
type ~~3130-E~~ "Elfaca" grating.
0200-58

1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525

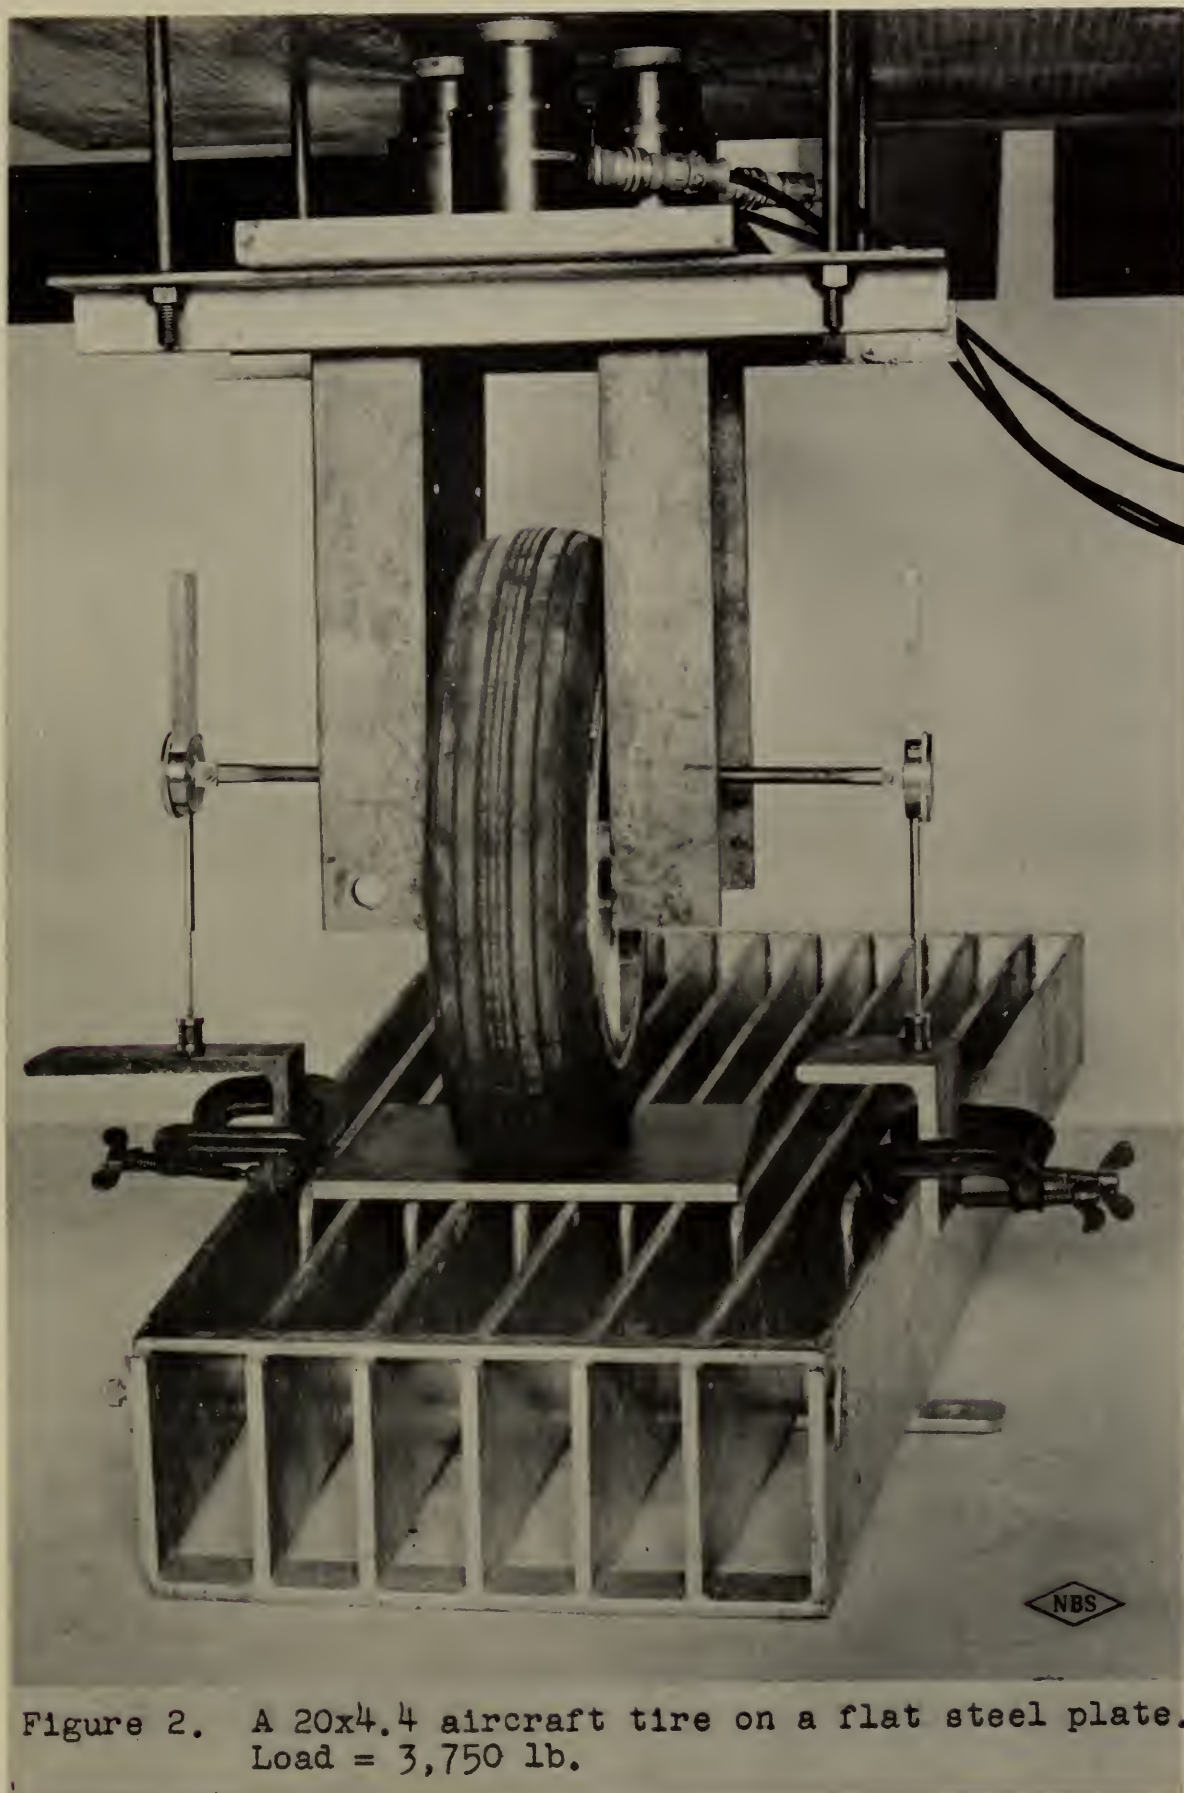


Figure 2. A 20x4.4 aircraft tire on a flat steel plate.
Load = 3,750 lb.



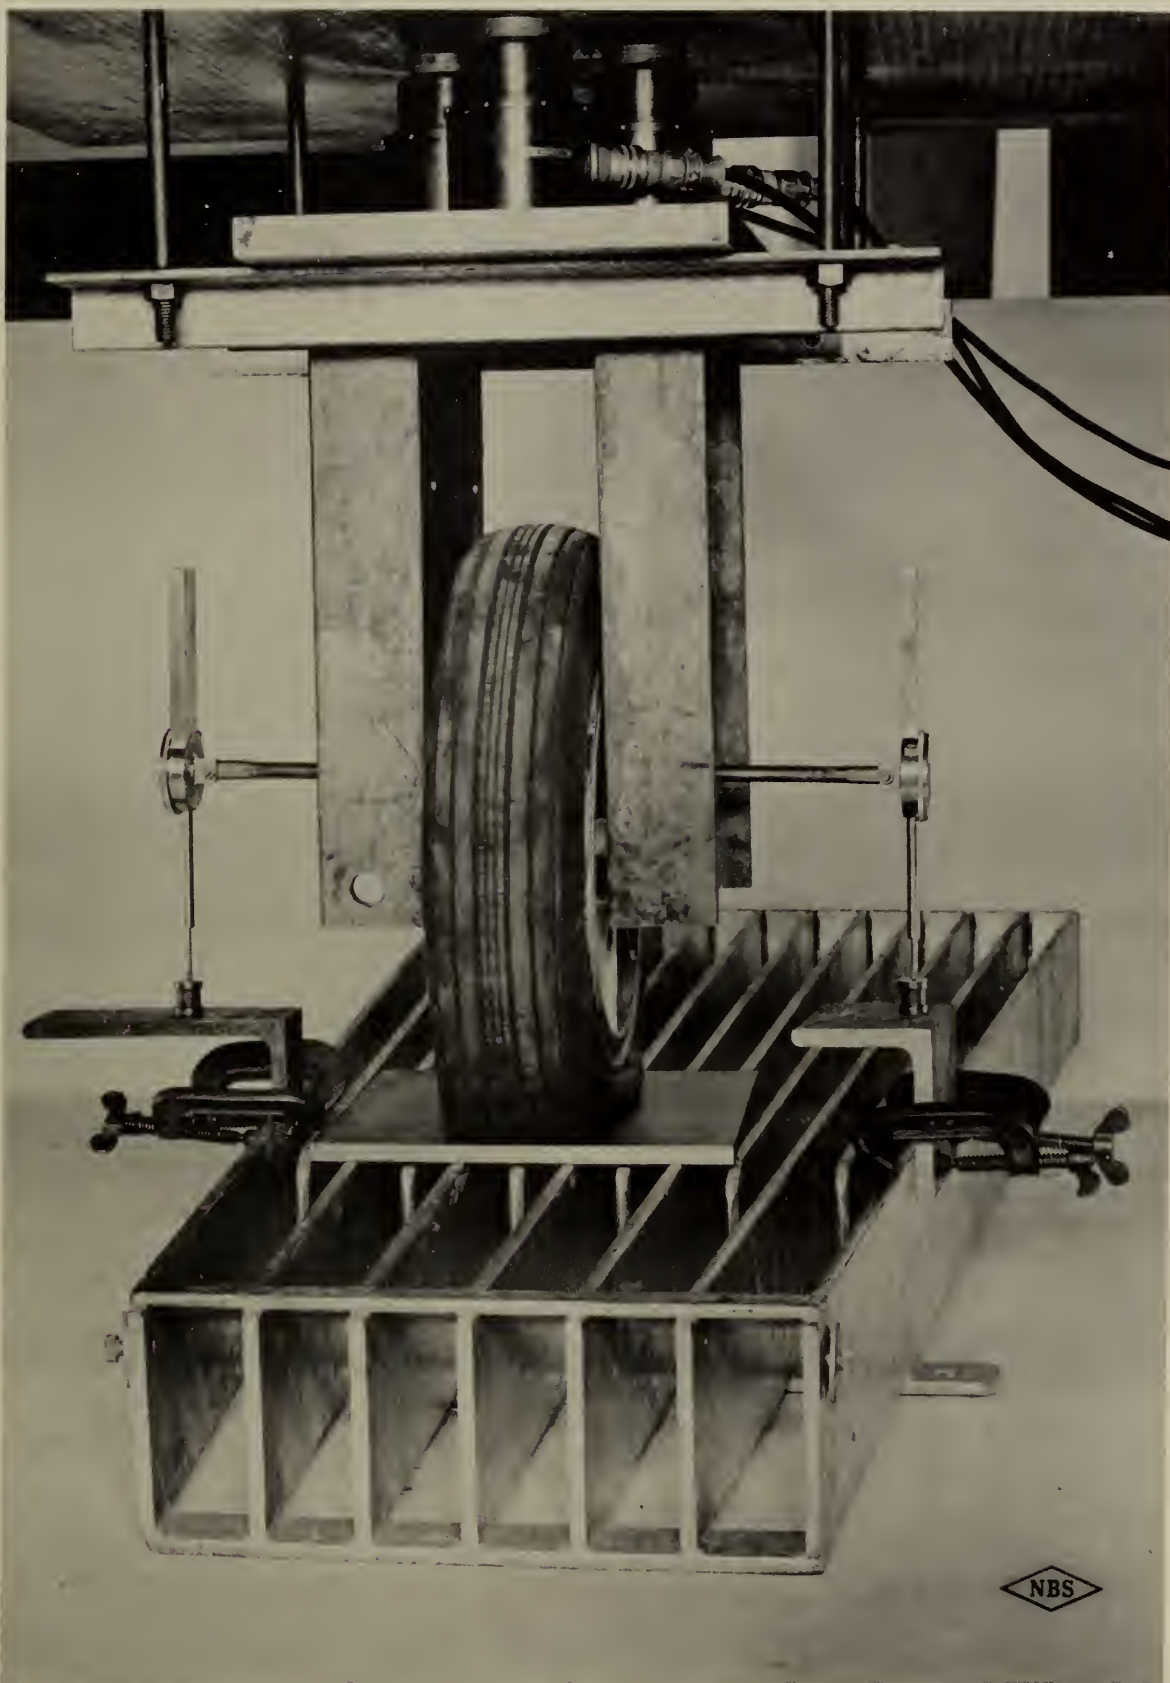


Figure 3. A 20x4.4 aircraft tire on a flat steel plate.
Load = 11,500 lb.

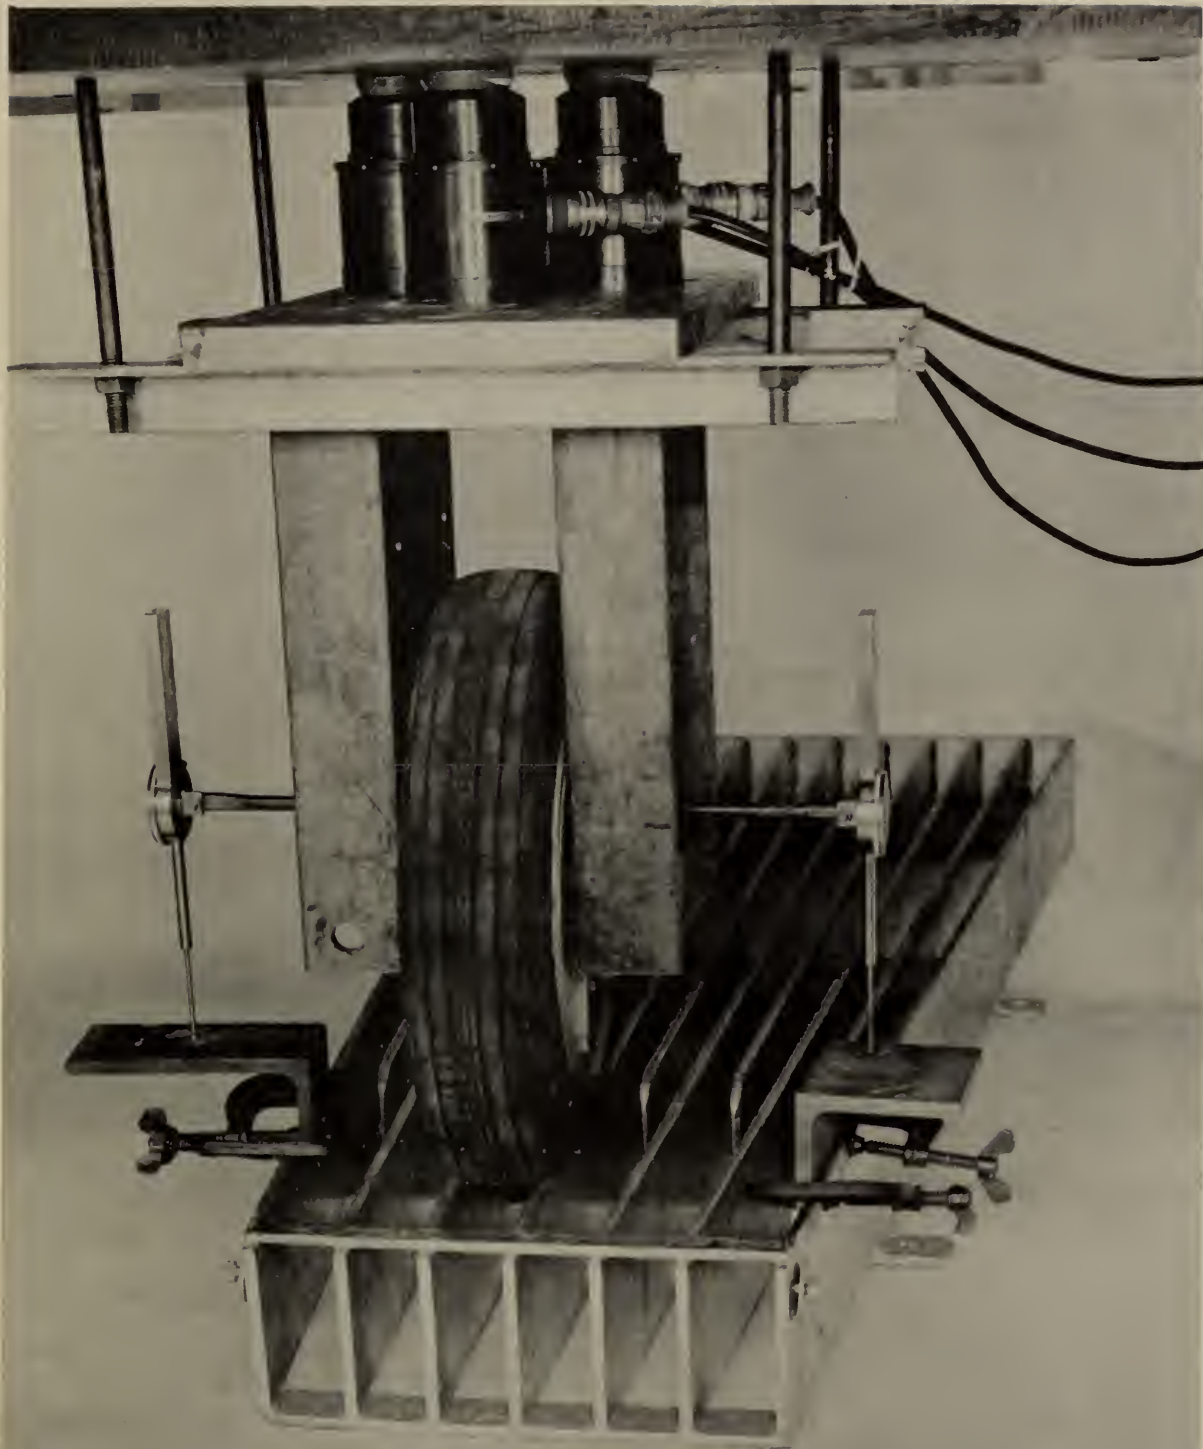

NBS

Figure 4. A 20x4.4 aircraft tire on two bars of a type 0200-SB "Elfaca" grating. Load = 3,750 lb.

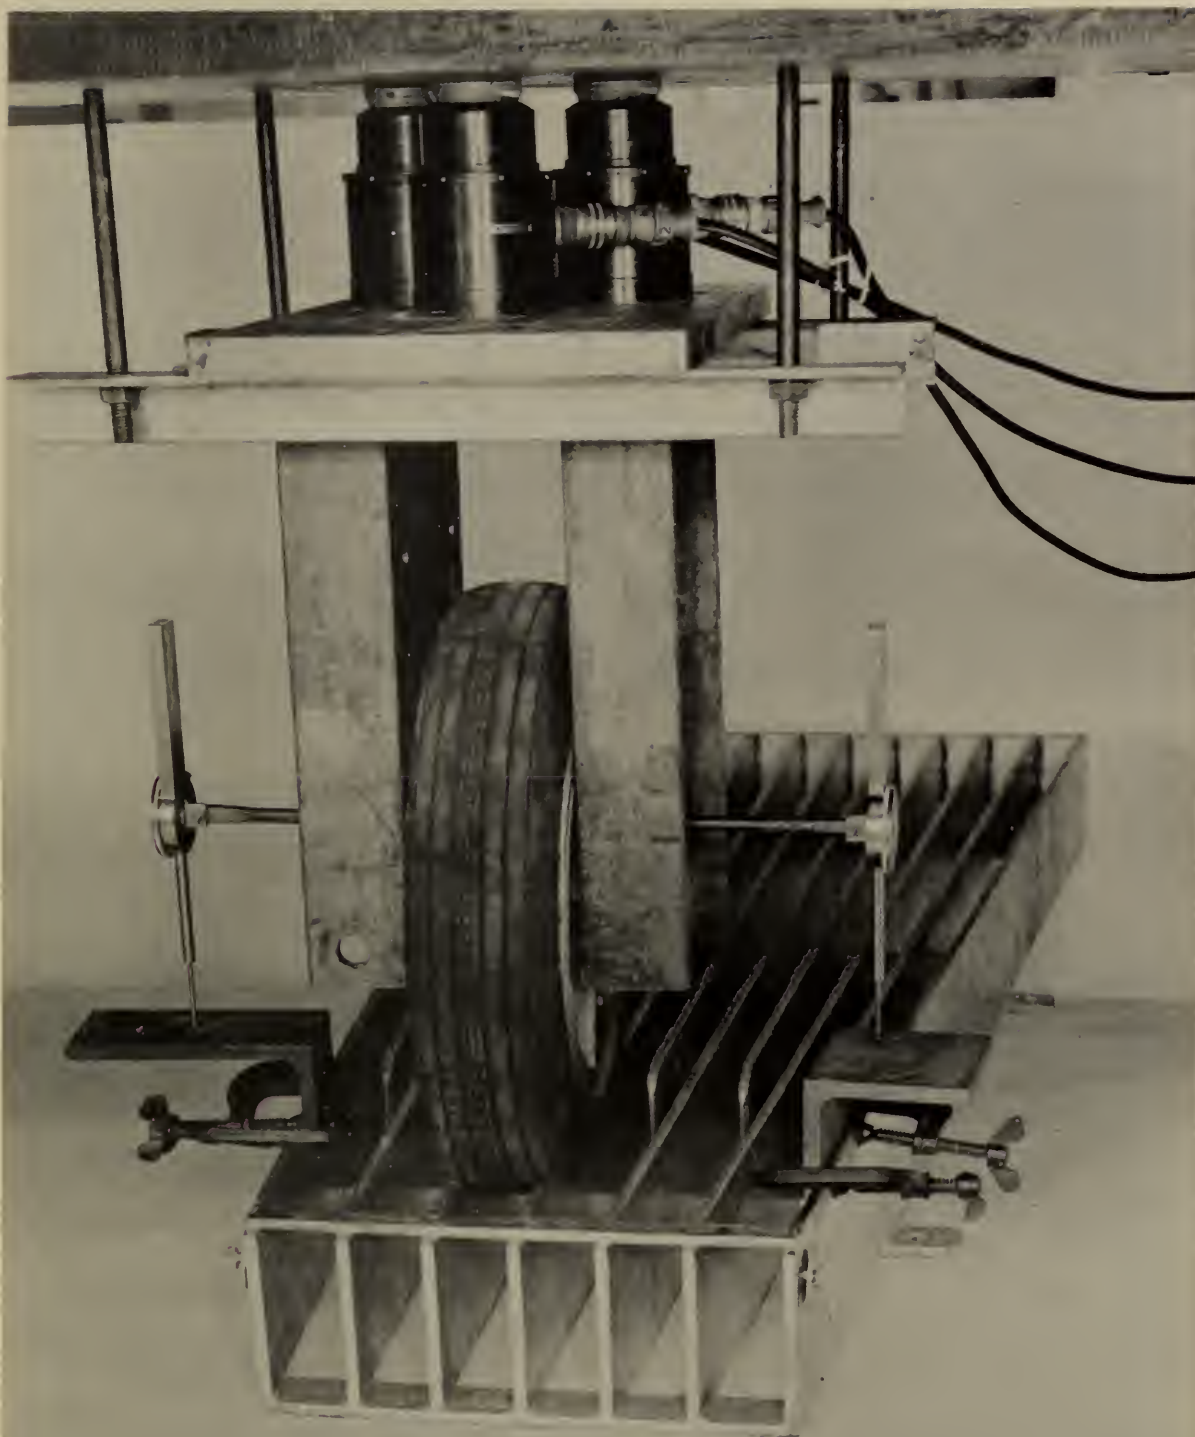

NBS

Figure 5. A 20x4:4 aircraft tire on two bars of a type 0200-SB "Elfaca" grating. Load = 10,000 lb.

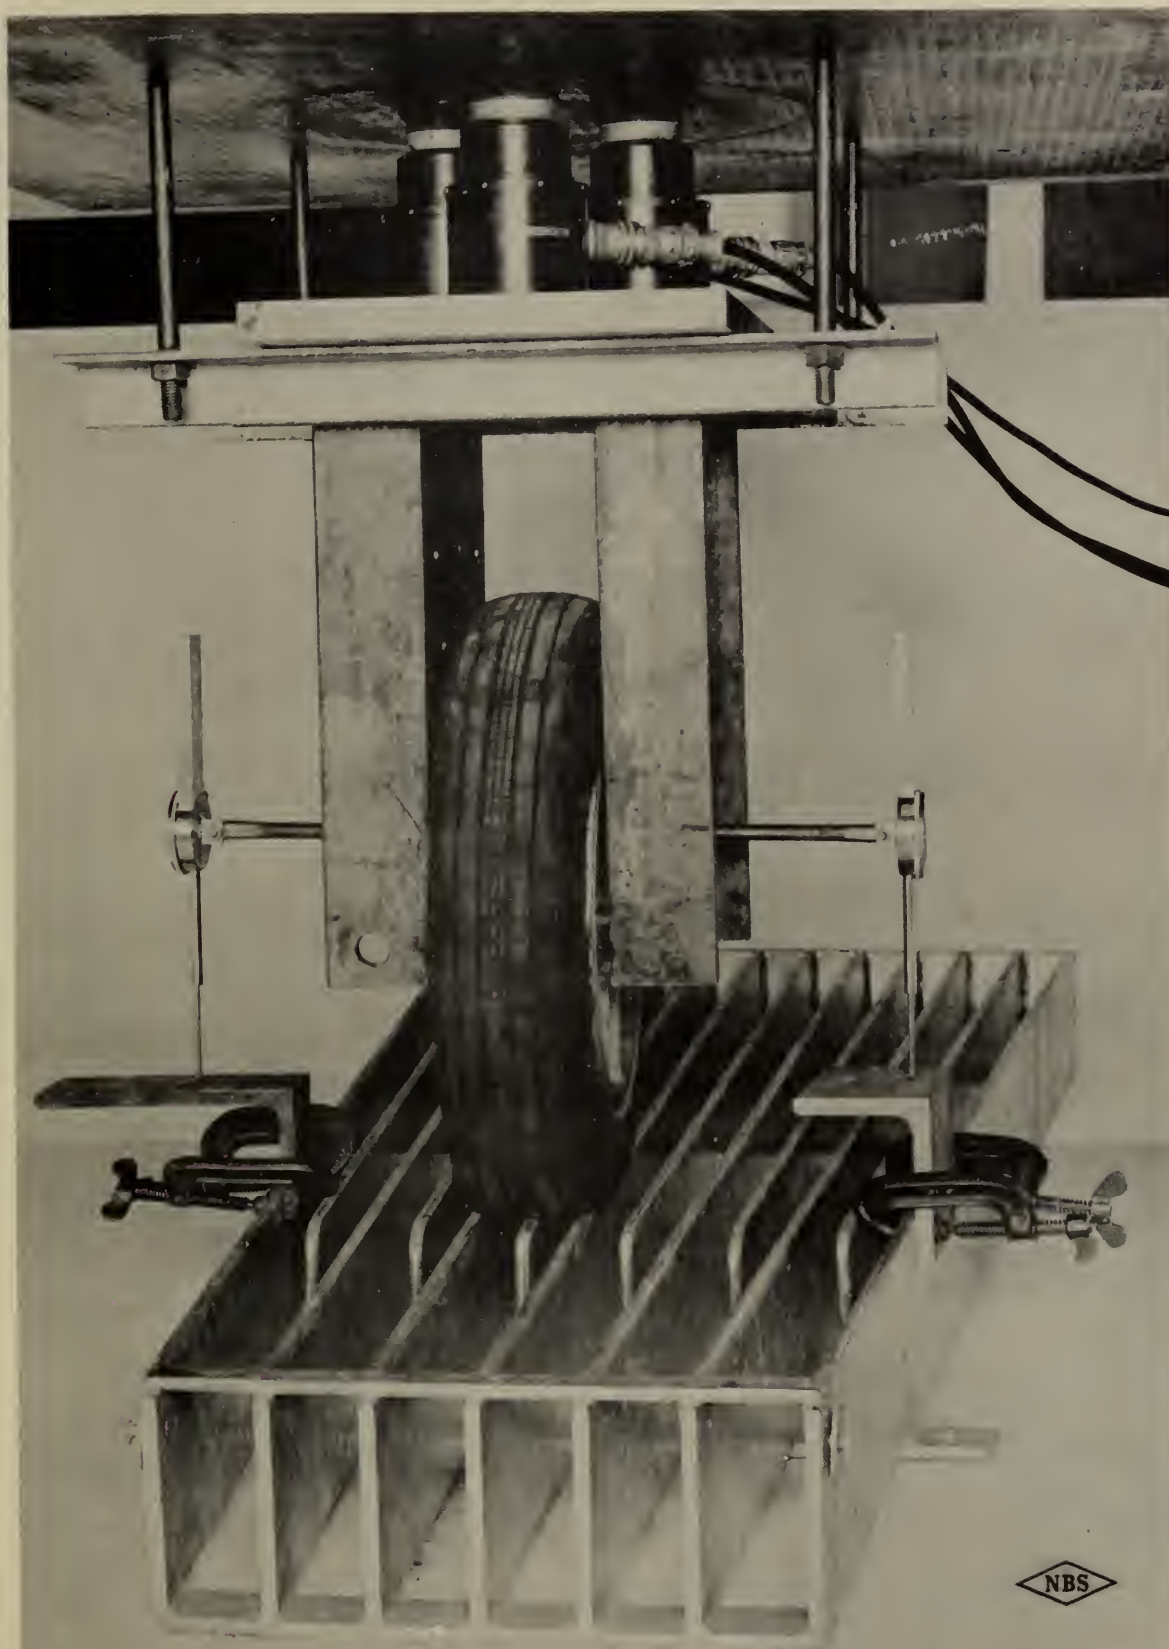


Figure 6. A 20x4.4 aircraft tire on three bars of a type 0200-SB "Elfaca" grating.
Load = 3,750 lb.

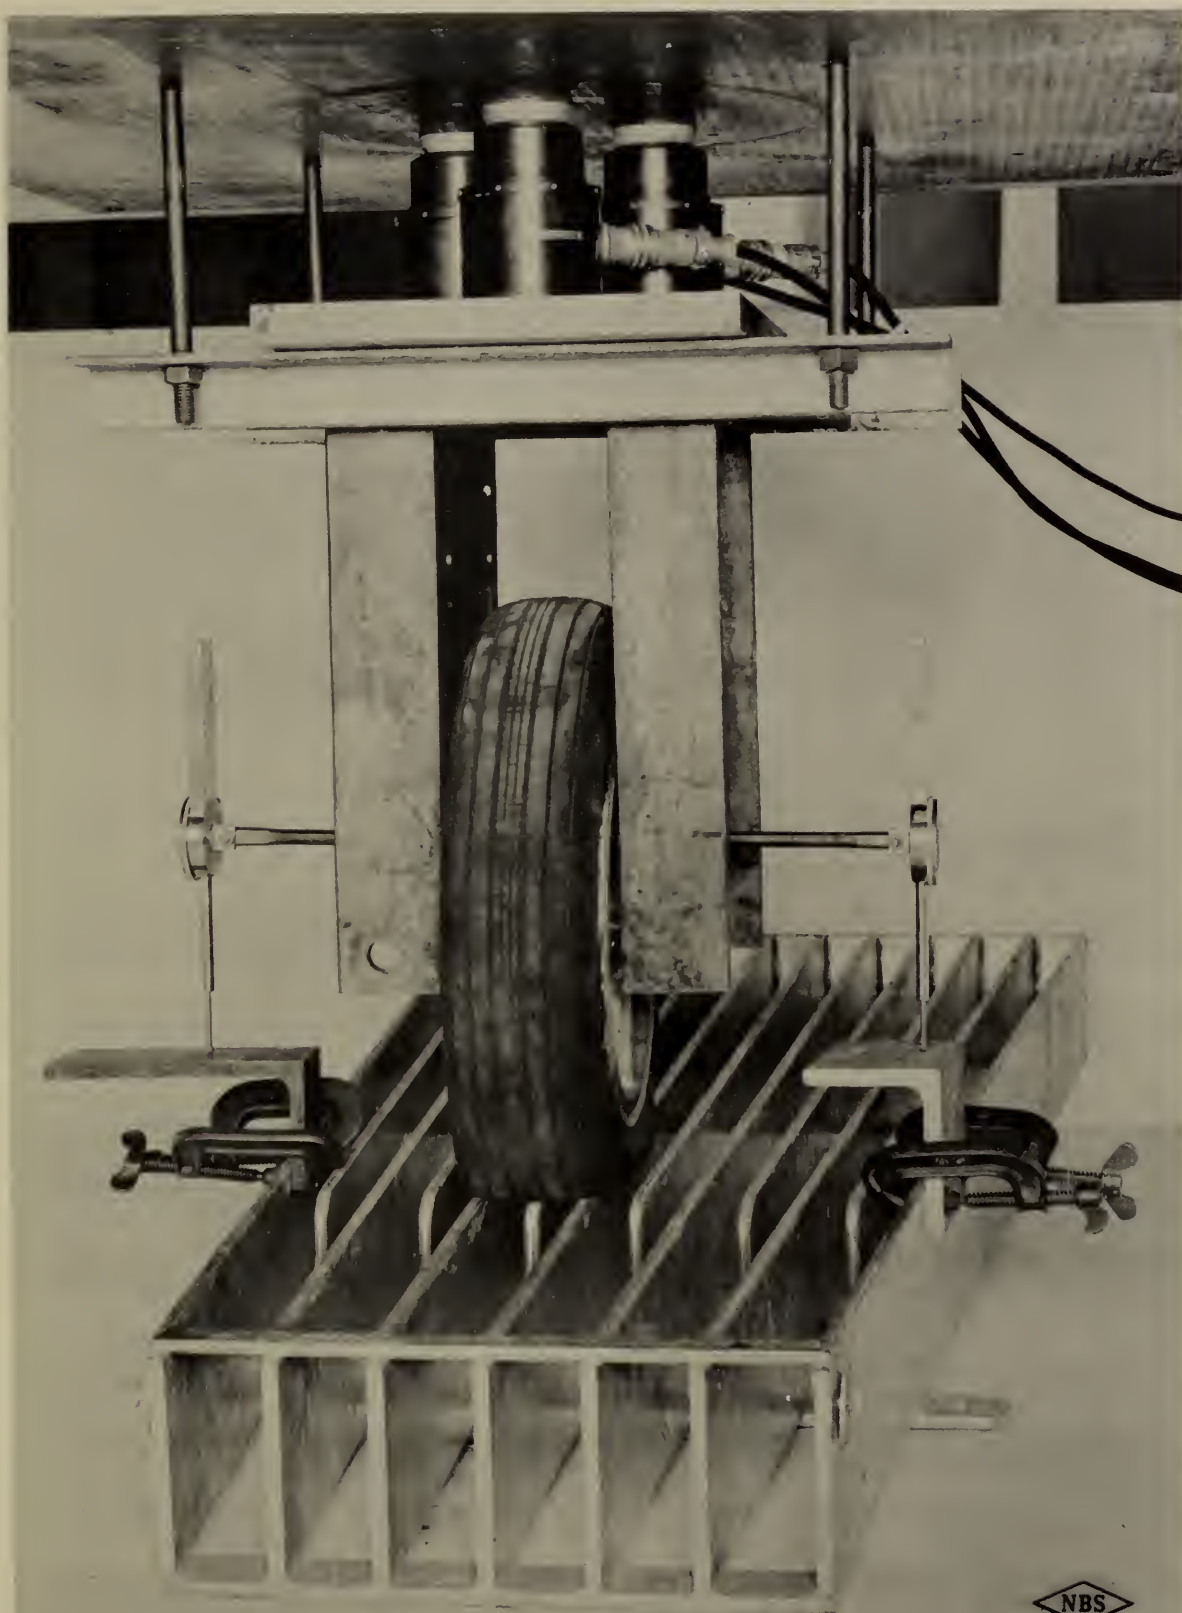


Figure 7. A 20x4.4 aircraft tire on three bars of a type 0200-SB "Elfaca" grating.
Load = 11,000 lb.

NBS

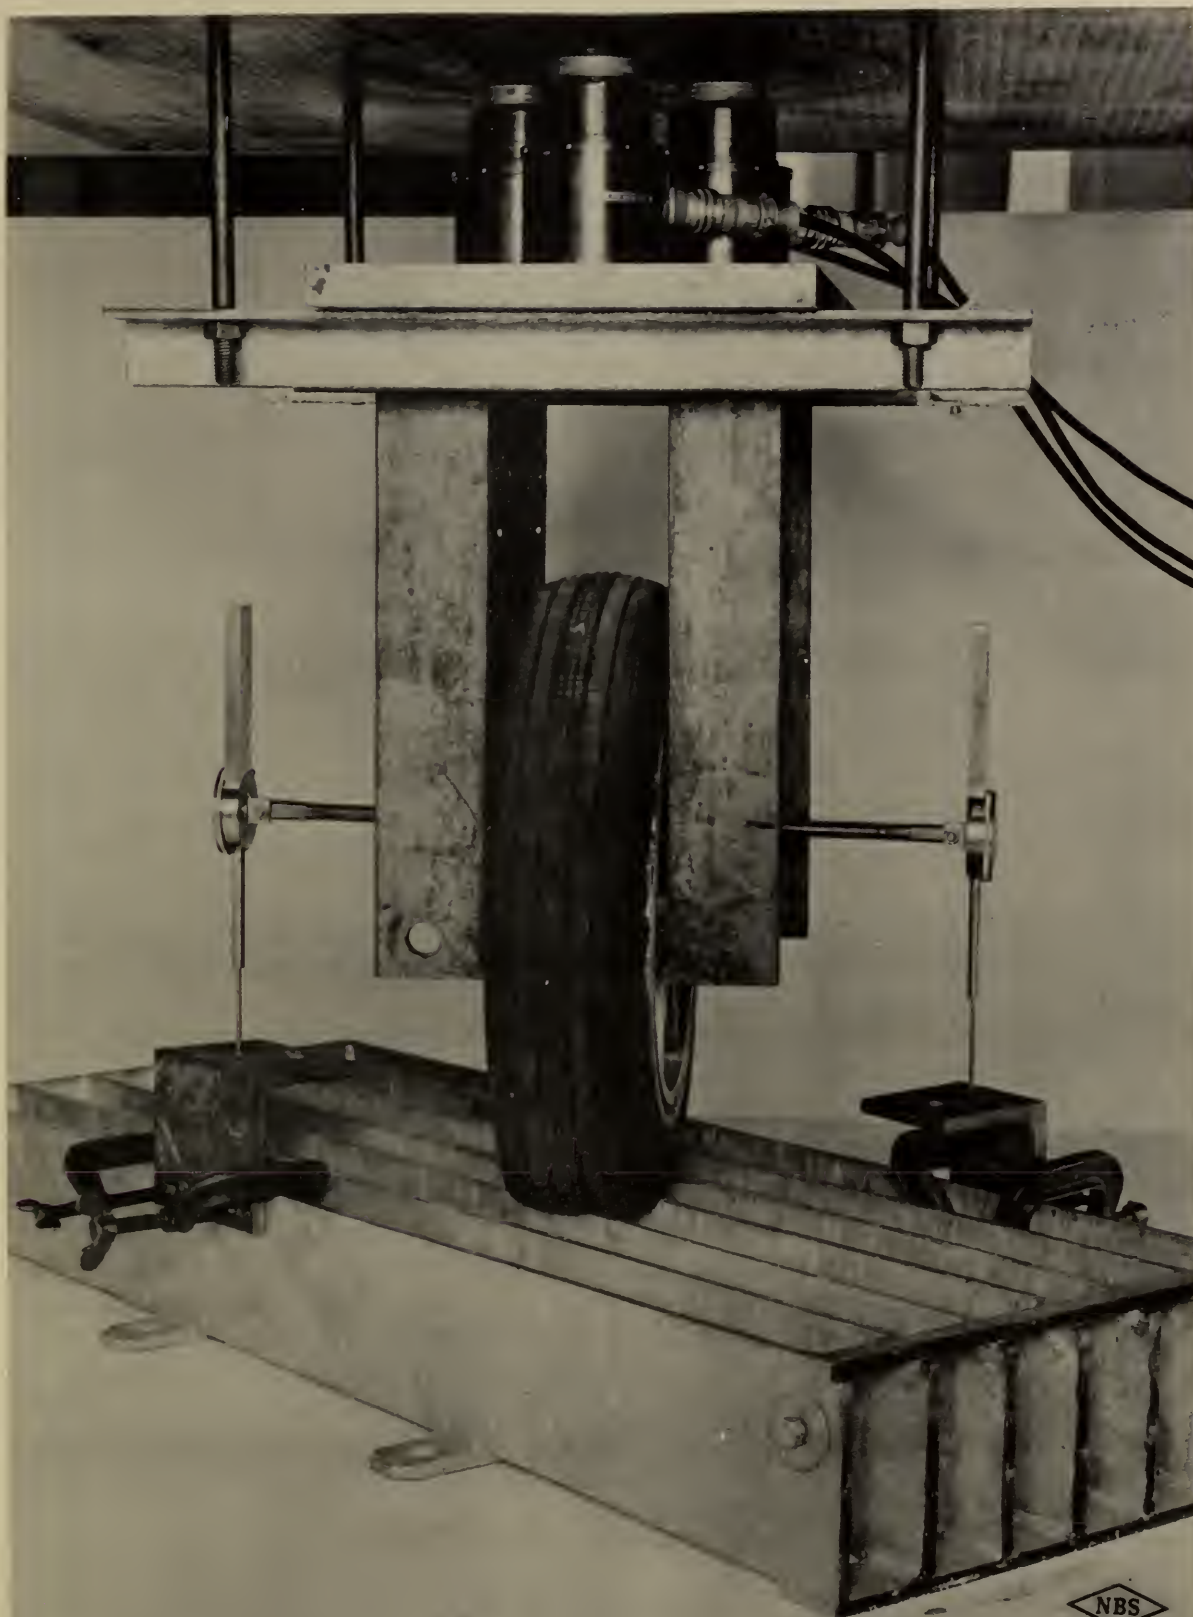


Figure 8. A 20x4.4 aircraft tire at 45° to the bars of a type 3130-E "Elfaca" grating.
Load = 3,750 lb.

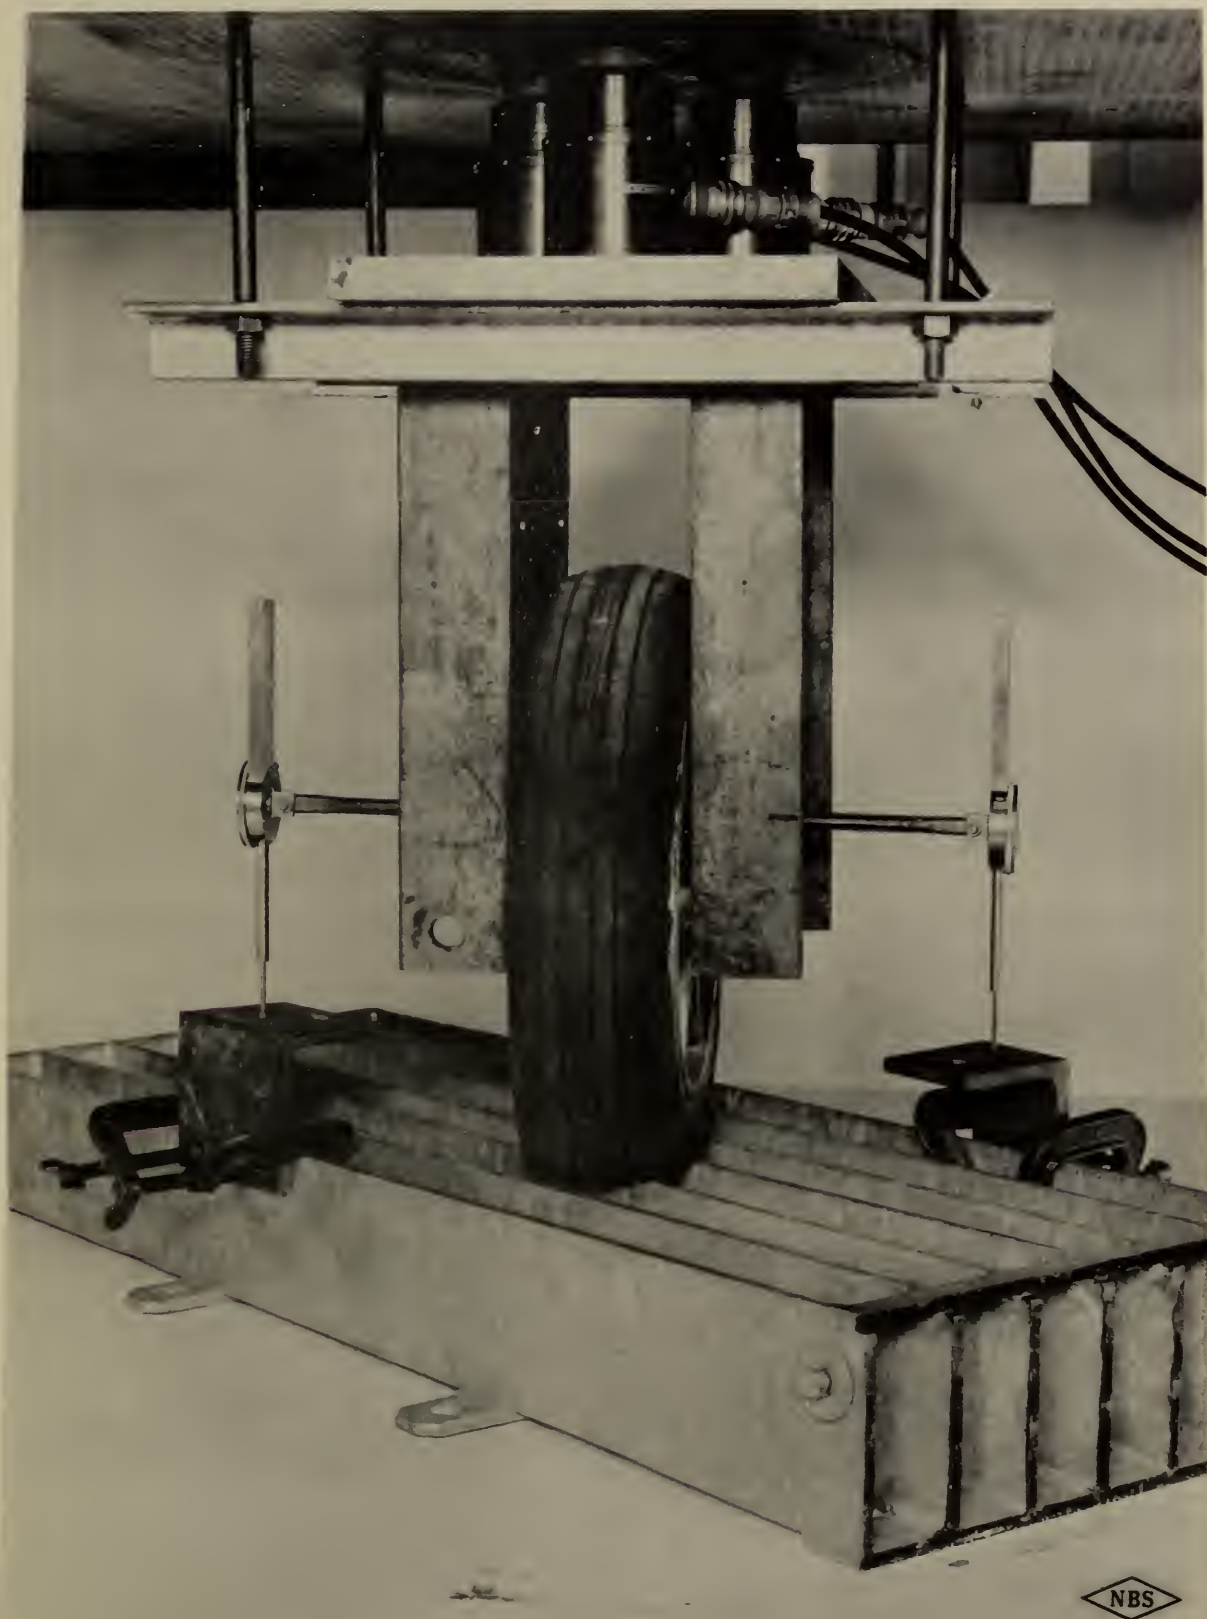


Figure 9. A 20x4.4 aircraft tire at 45° to the bars of a type 3130-E "Elfaca" grating.
Load = 9,000 lb.

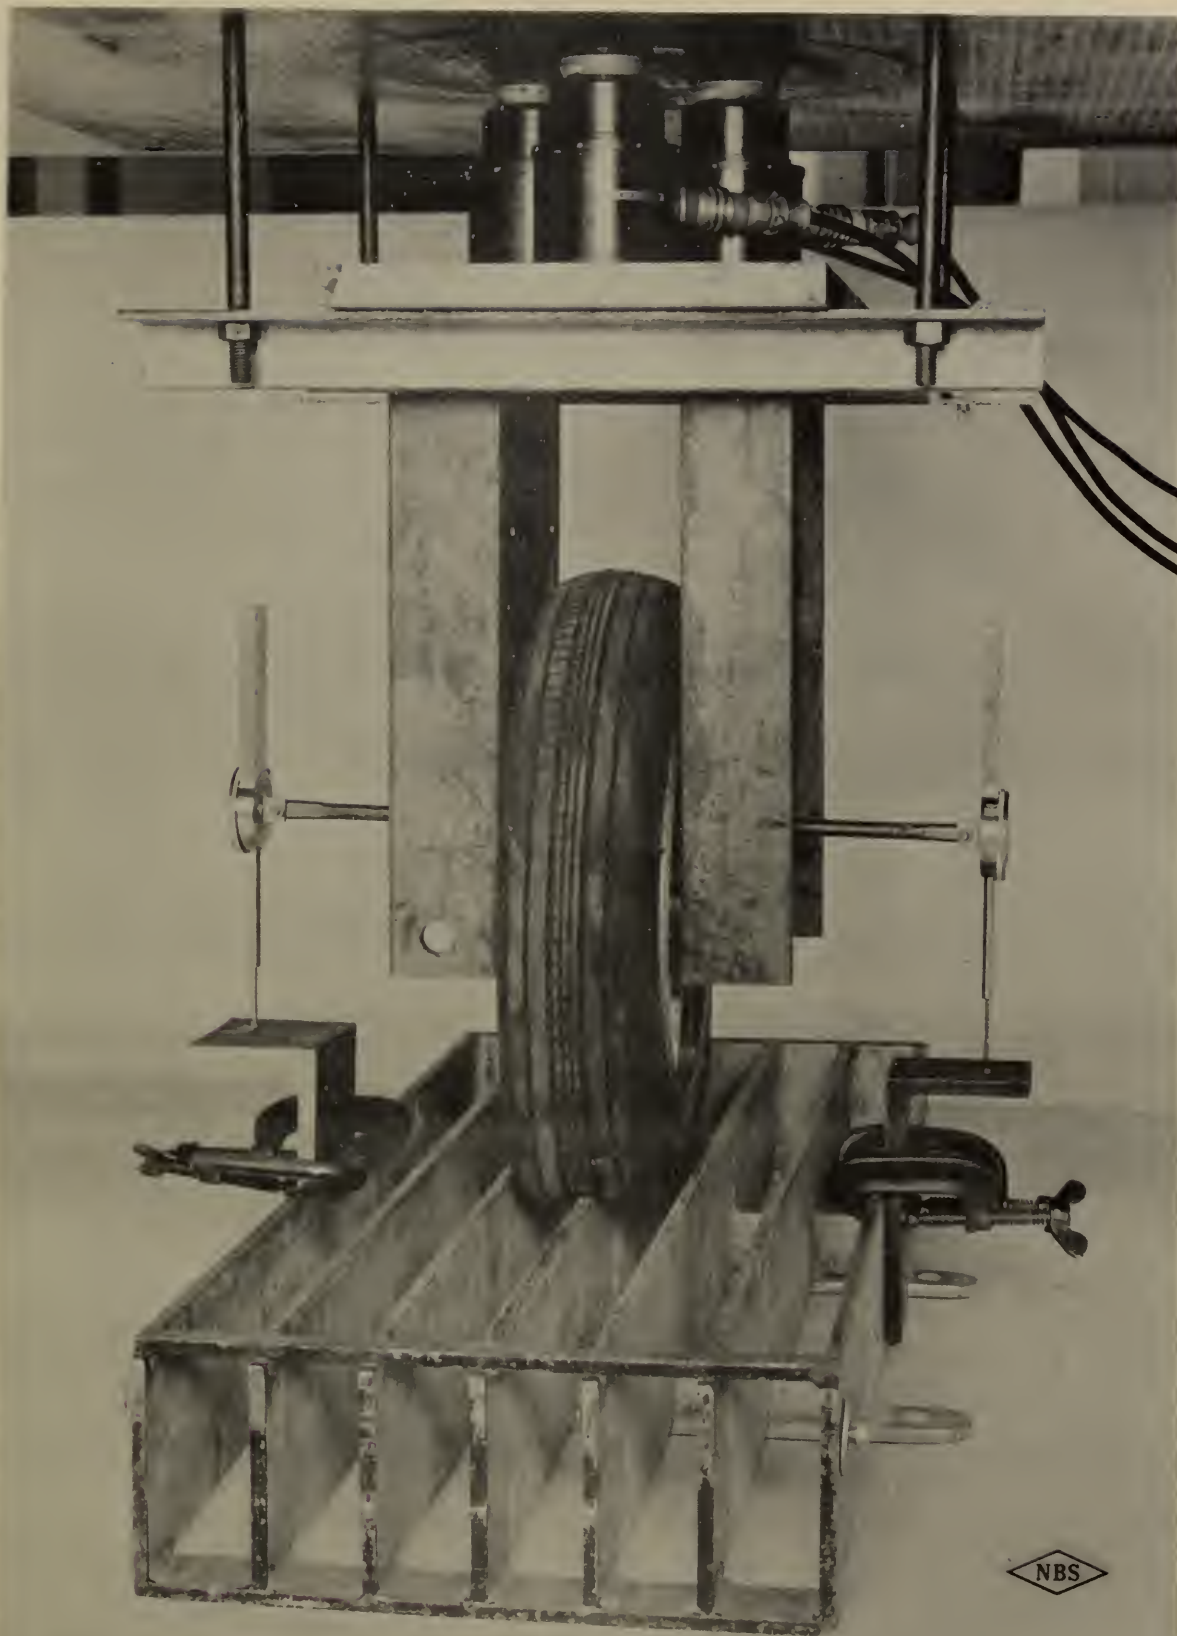


Figure 10. A 20x4.4 aircraft tire on one bar of a type 3130-E "Elfaca" grating. Load = 3,750 lb.

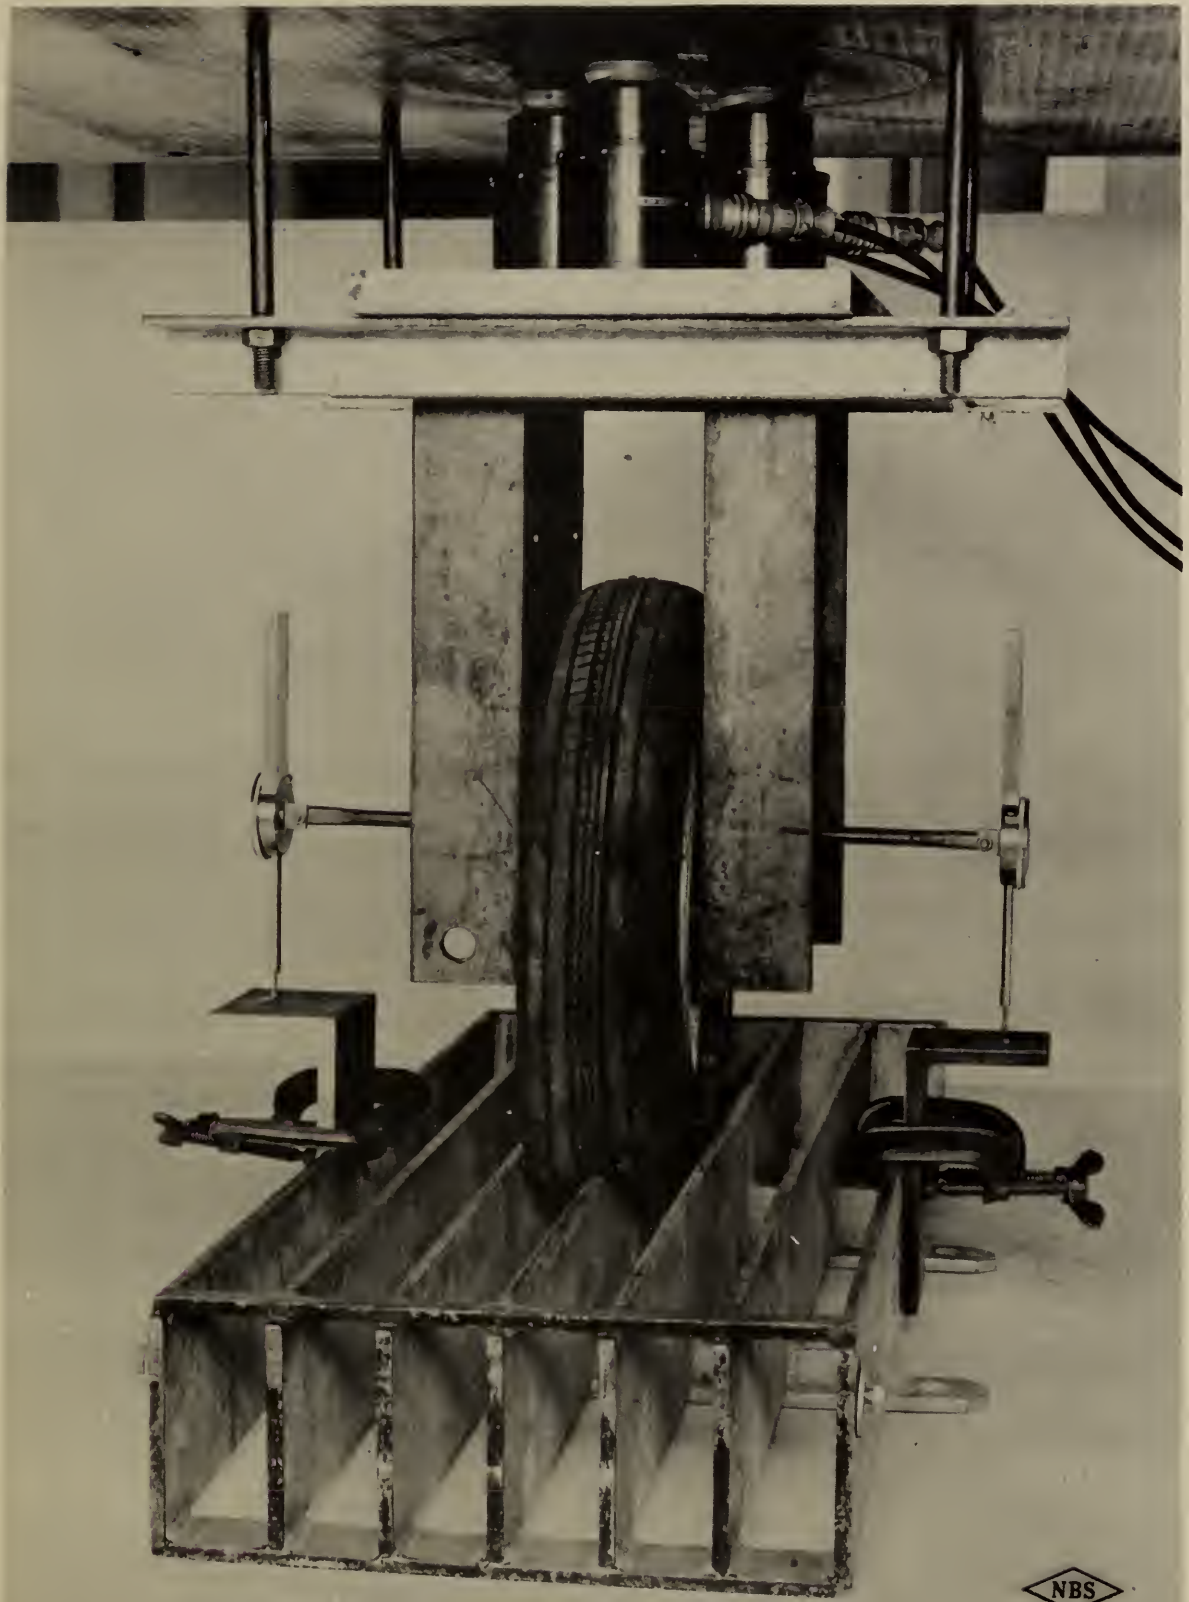


Figure 11. A 20x4.4 aircraft tire on one bar of a type 3130-E "Elfaca" grating. Load = 5,800 lb.

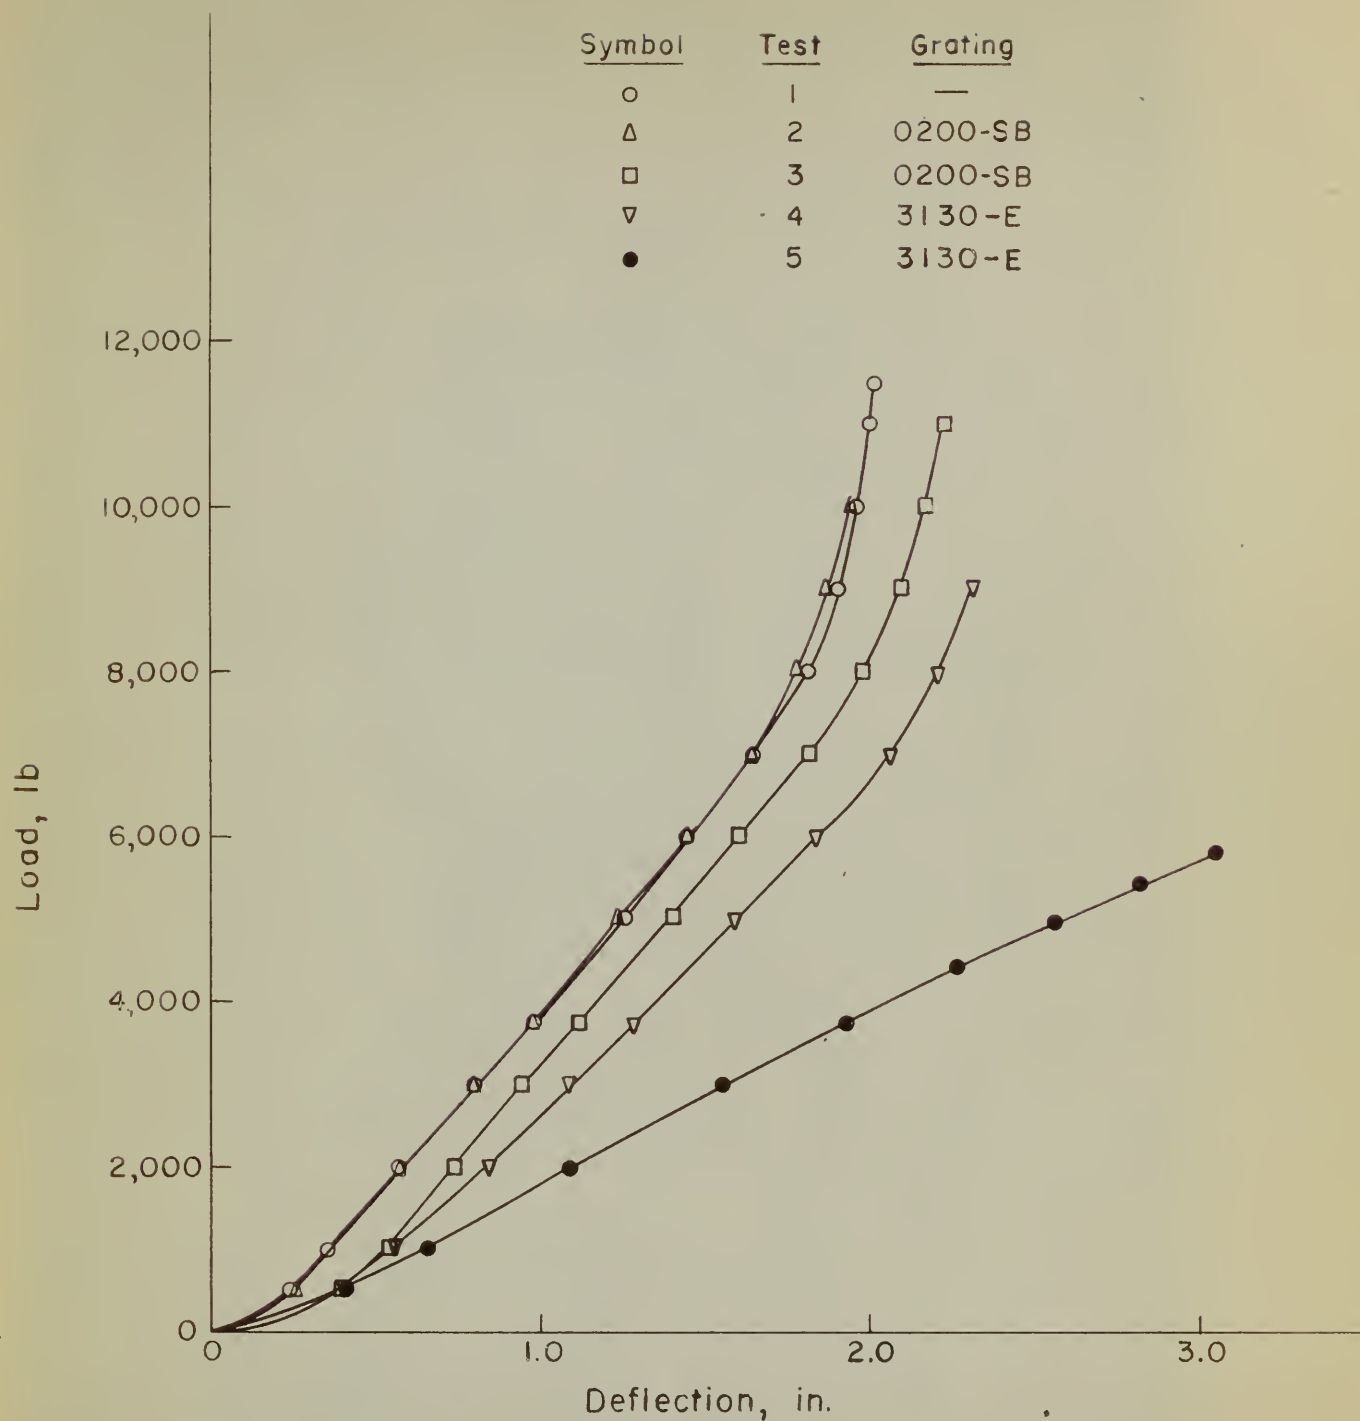


Fig. 12 Load-deflection relations for a 20 x 4.4 aircraft tire on "Elfaca" grating.

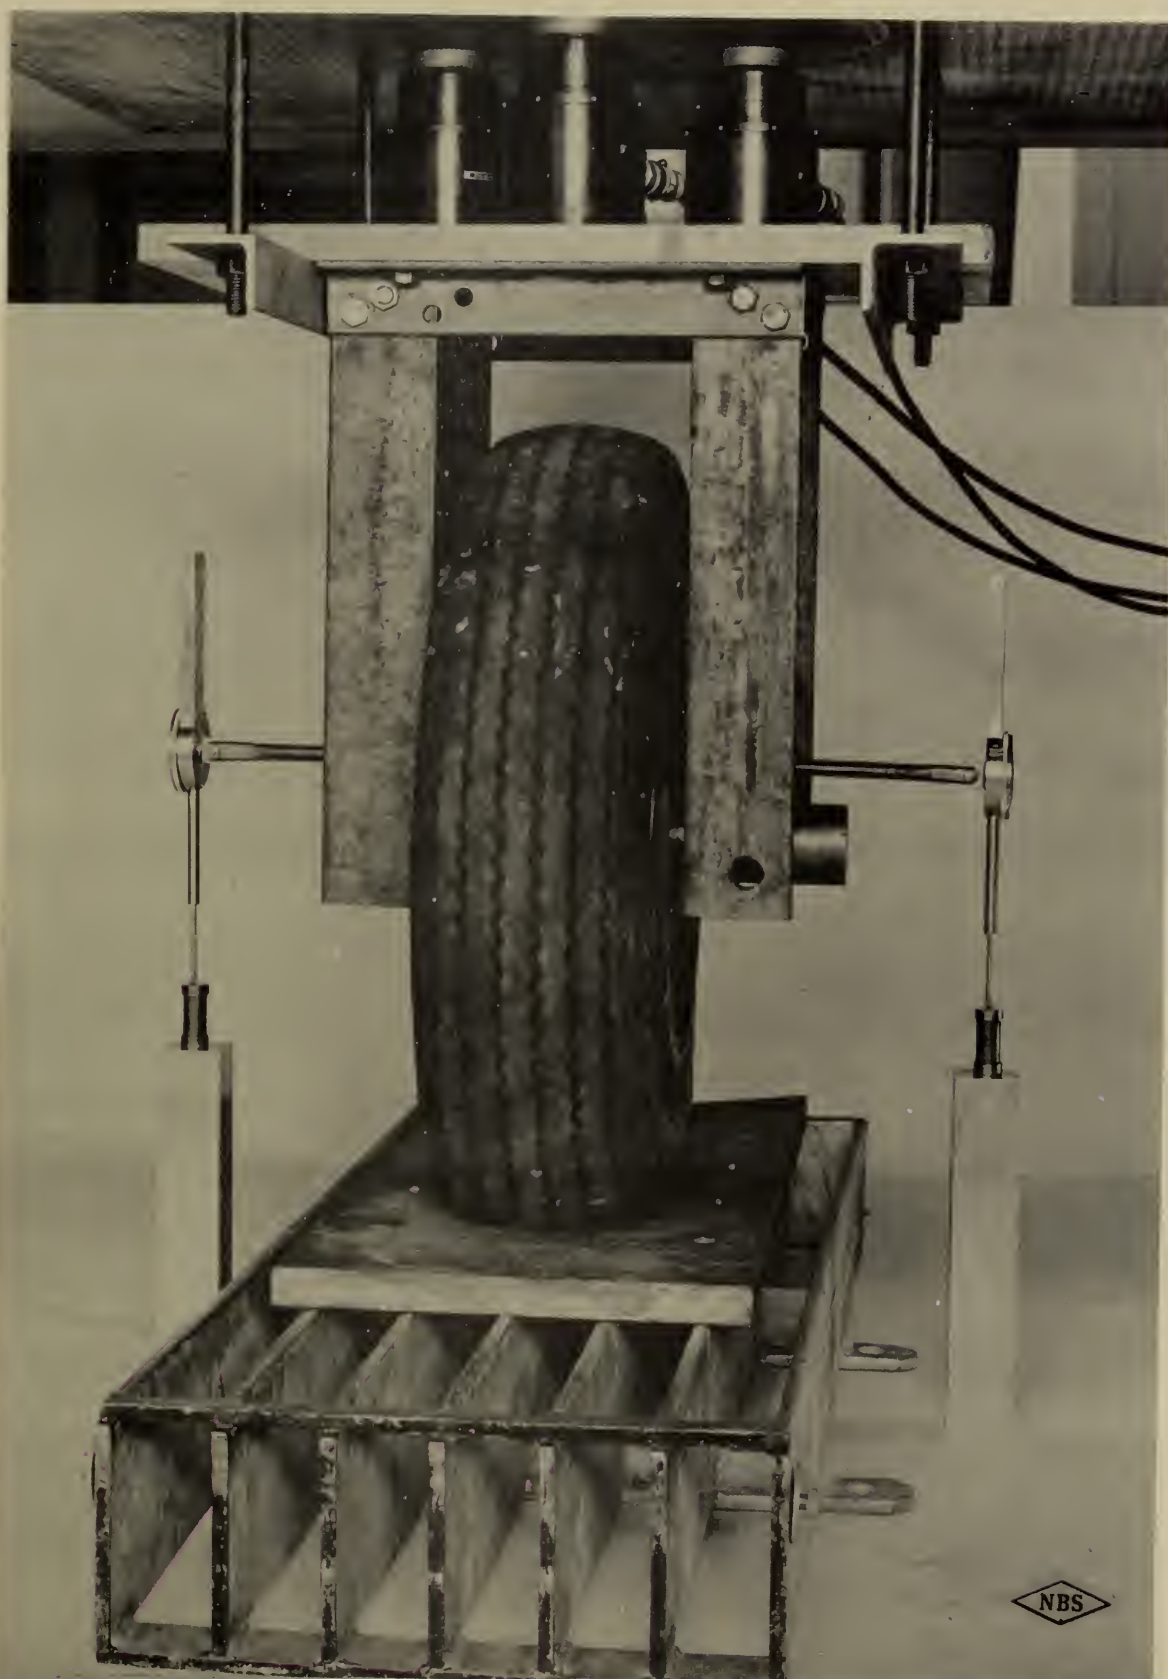


Figure 13. A 26x6.6 aircraft tire on a flat steel plate.
Load = 8,000 lb.

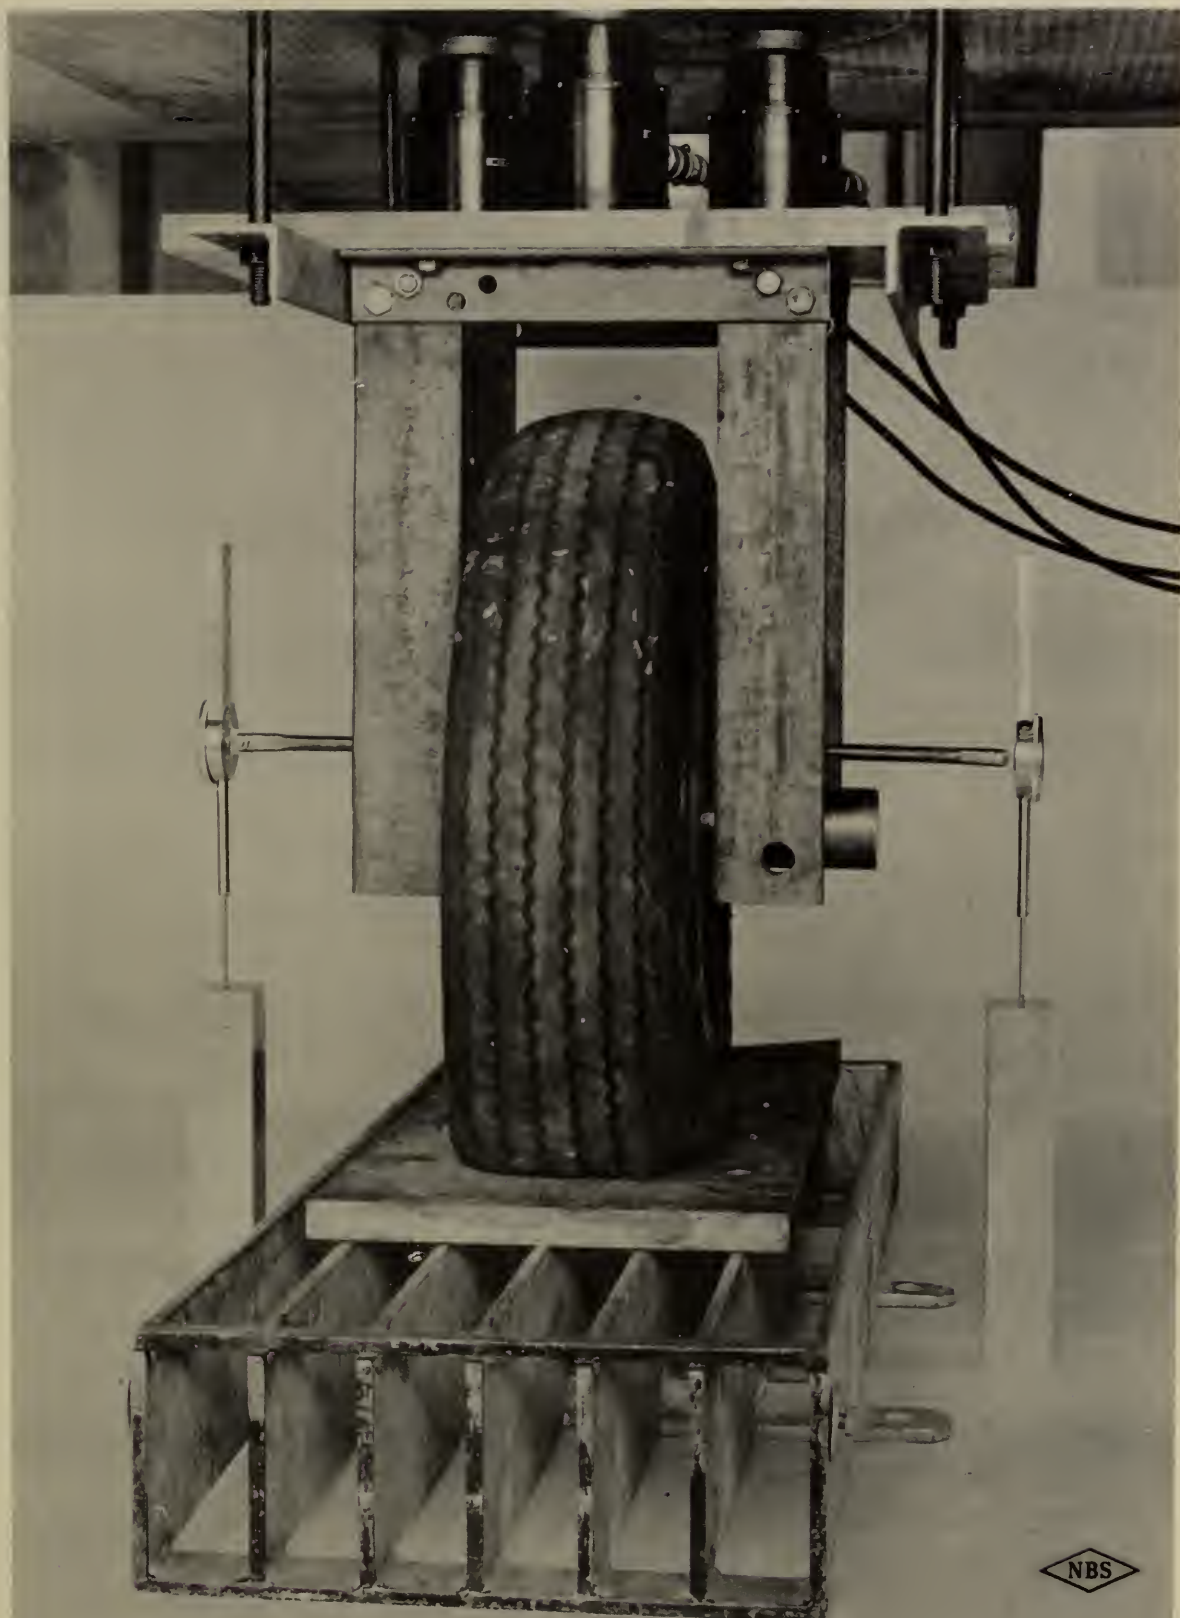


Figure 14. A 26x6.6 aircraft tire on a flat steel plate
Load = 20,000 lb.

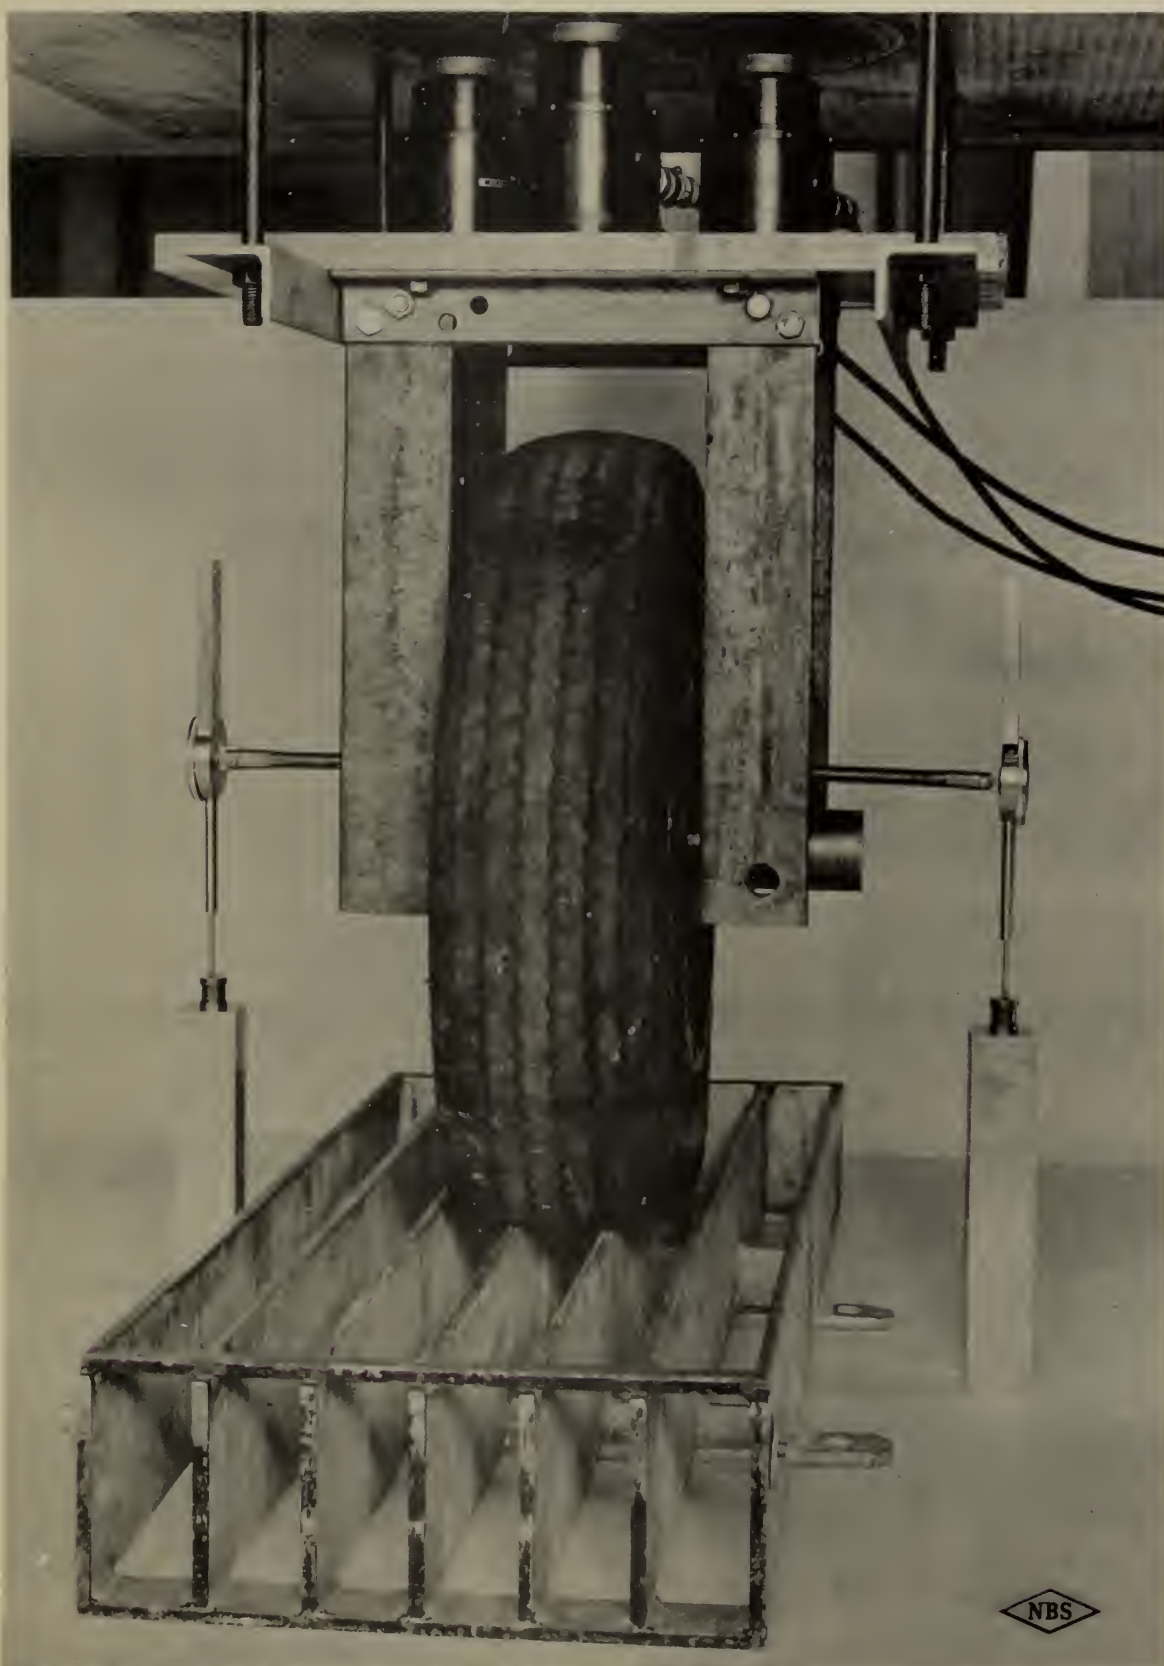


Figure 15. A 26x6.6 aircraft tire on two bars of a type 3130-E "Elfaca" grating. Load = 8,000 lb.



Figure 16. A 26x6.6 aircraft tire on two bars of a type 3130-E "Elfaca" grating. Load = 18,000 lb.

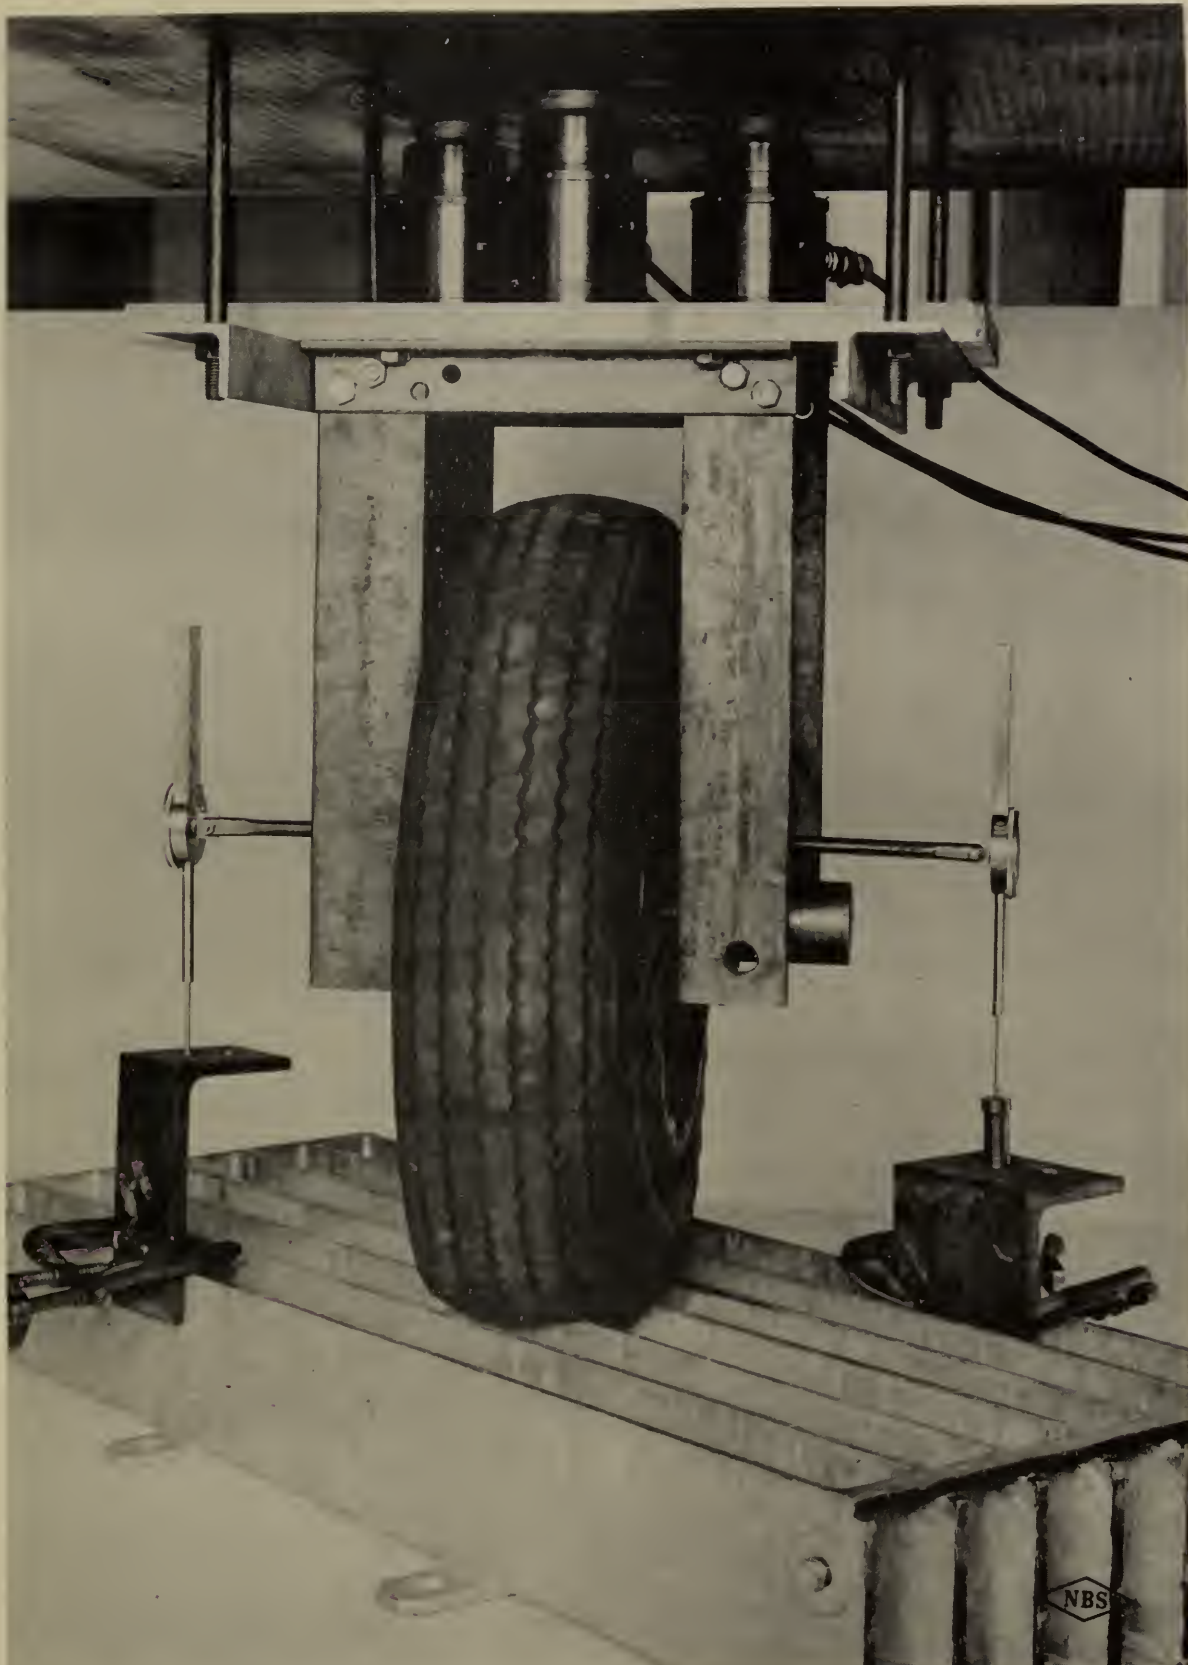


Figure 17. A 26x6.6 aircraft tire at 45° to the bars of a type 3130-E "Elfaca" grating.
Load = 8,000 lb.

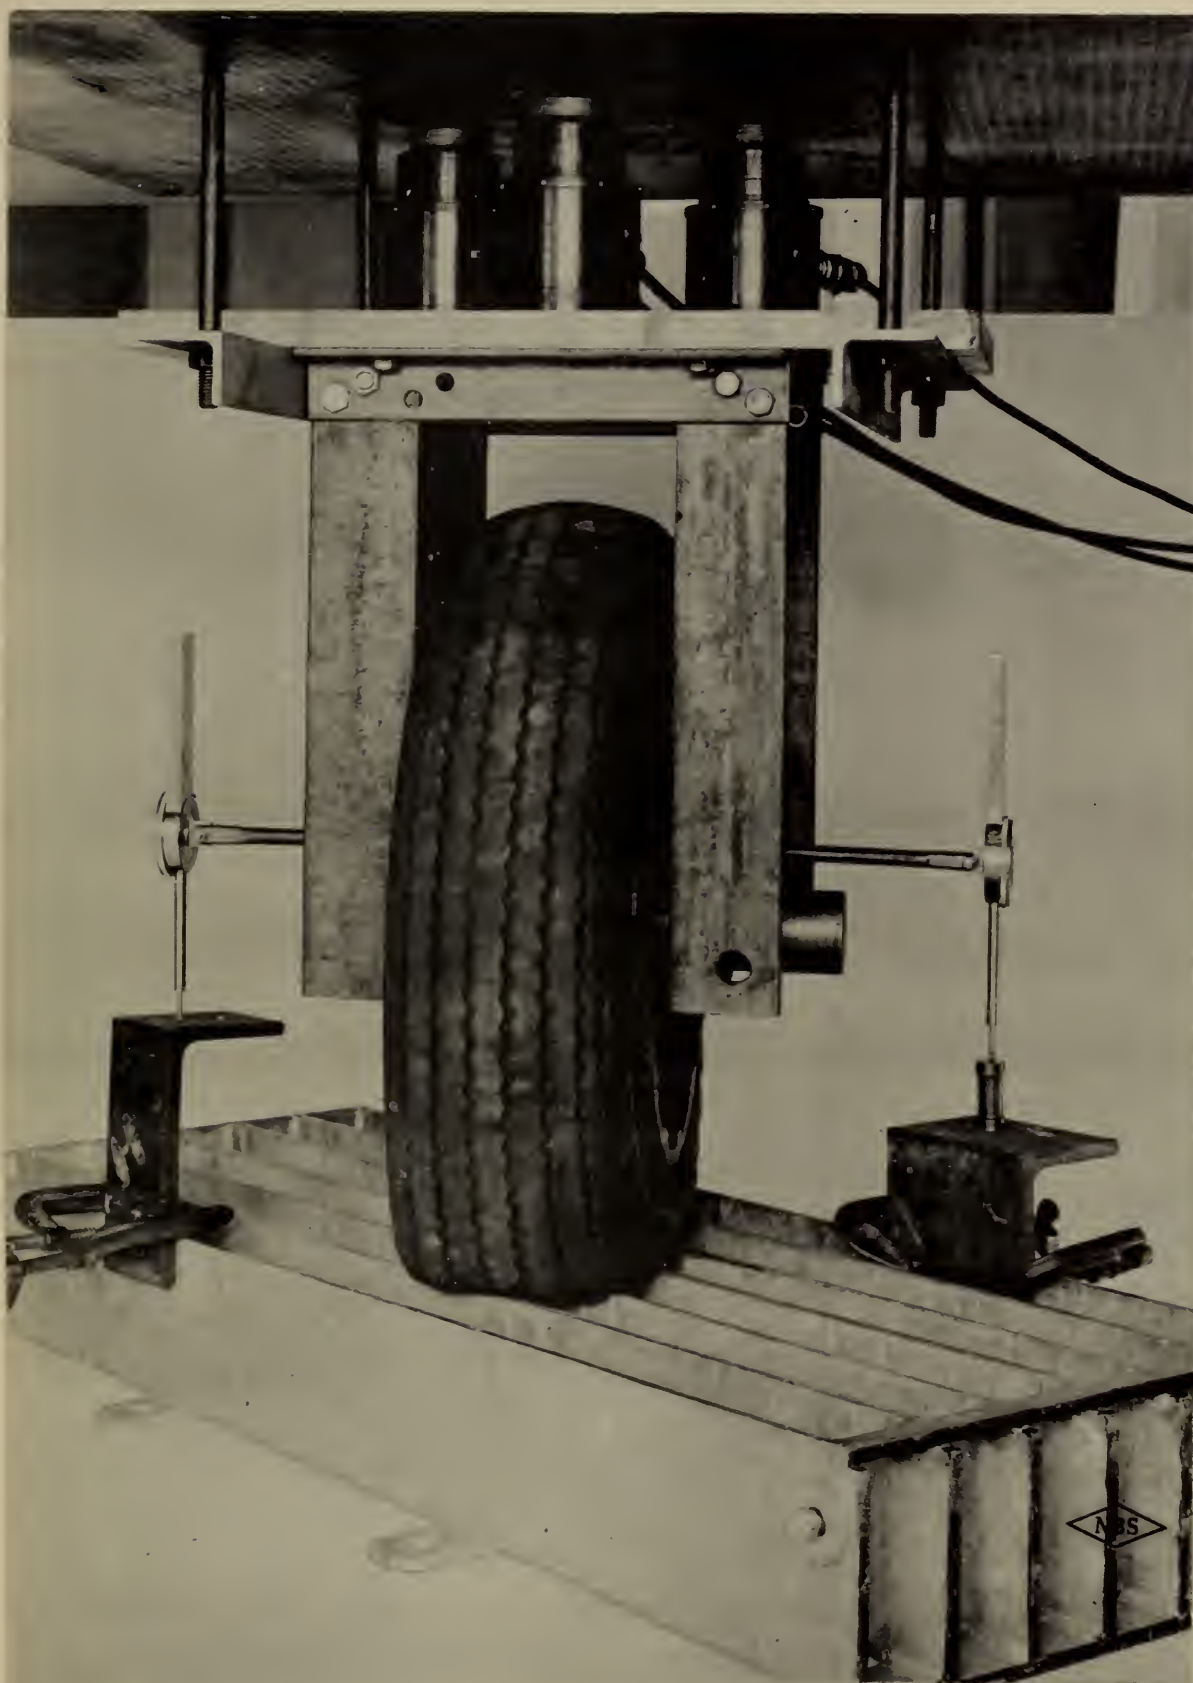


Figure 18. A 26x6.6 aircraft tire at 45° to the bars of a type 3130-E "Elfaca" grating.
Load = 18,000 lb.

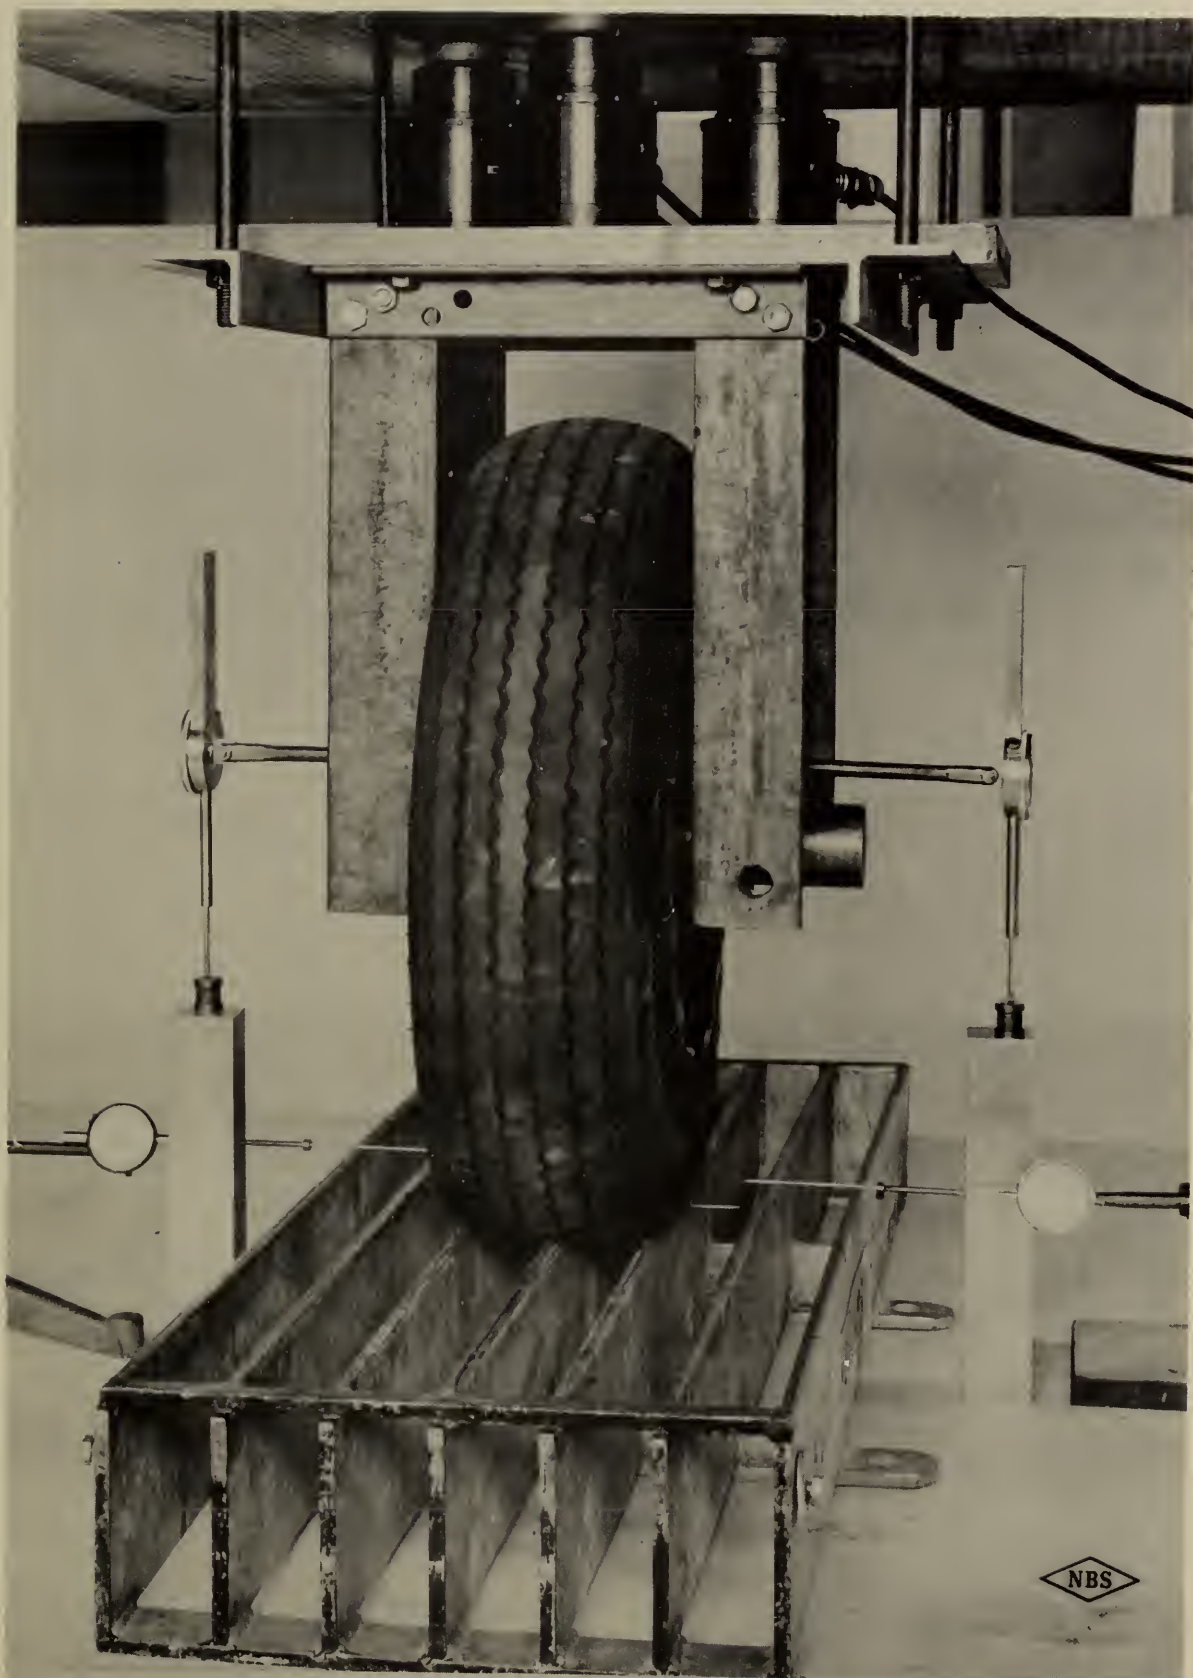


Figure 19. A 26x6.6 aircraft tire on three bars of a type 3130-E "Elfaca" grating.
Load = 8,000 lb.

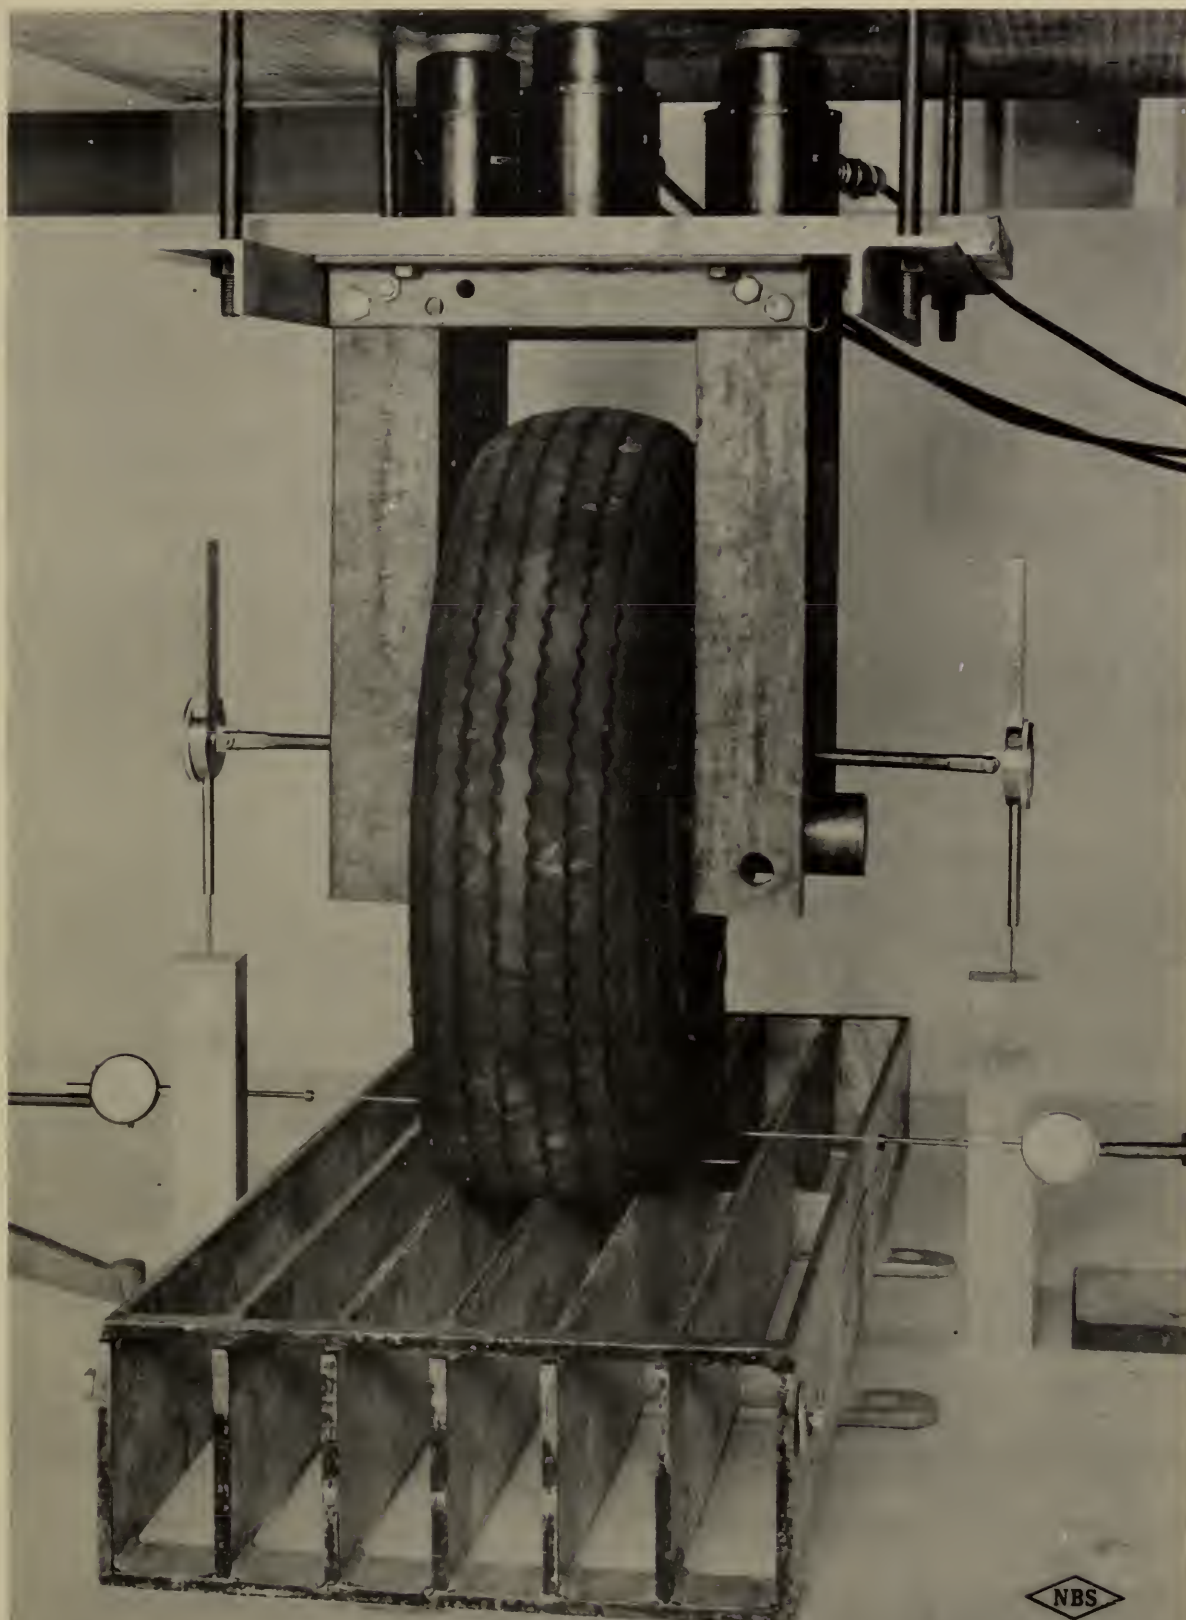


Figure 20. A 26x6.6 aircraft tire on three bars of a type 3130-E "Elfaca" grating.
Load = 18,000 lb.

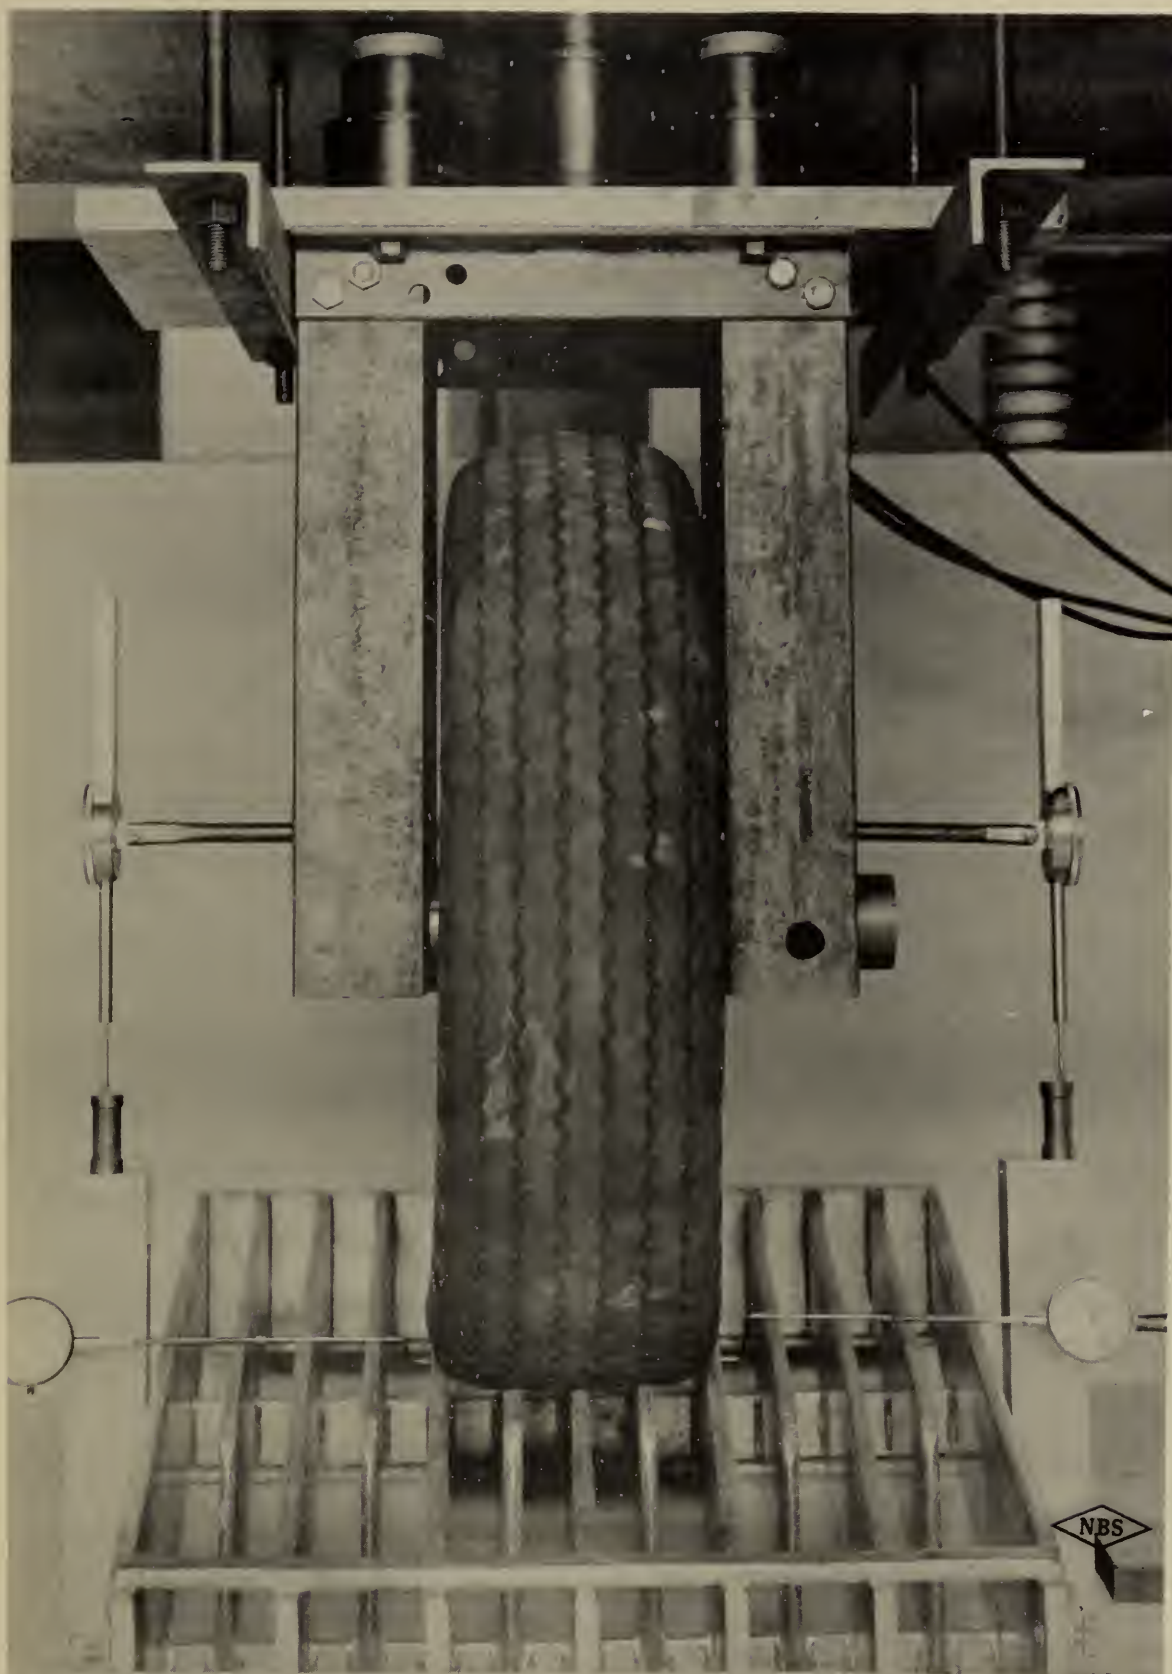


Figure 21. A 26x6.6 aircraft tire on five bars of a type 0200-SB "Elfaca" grating.
Load = 8,000 lb.

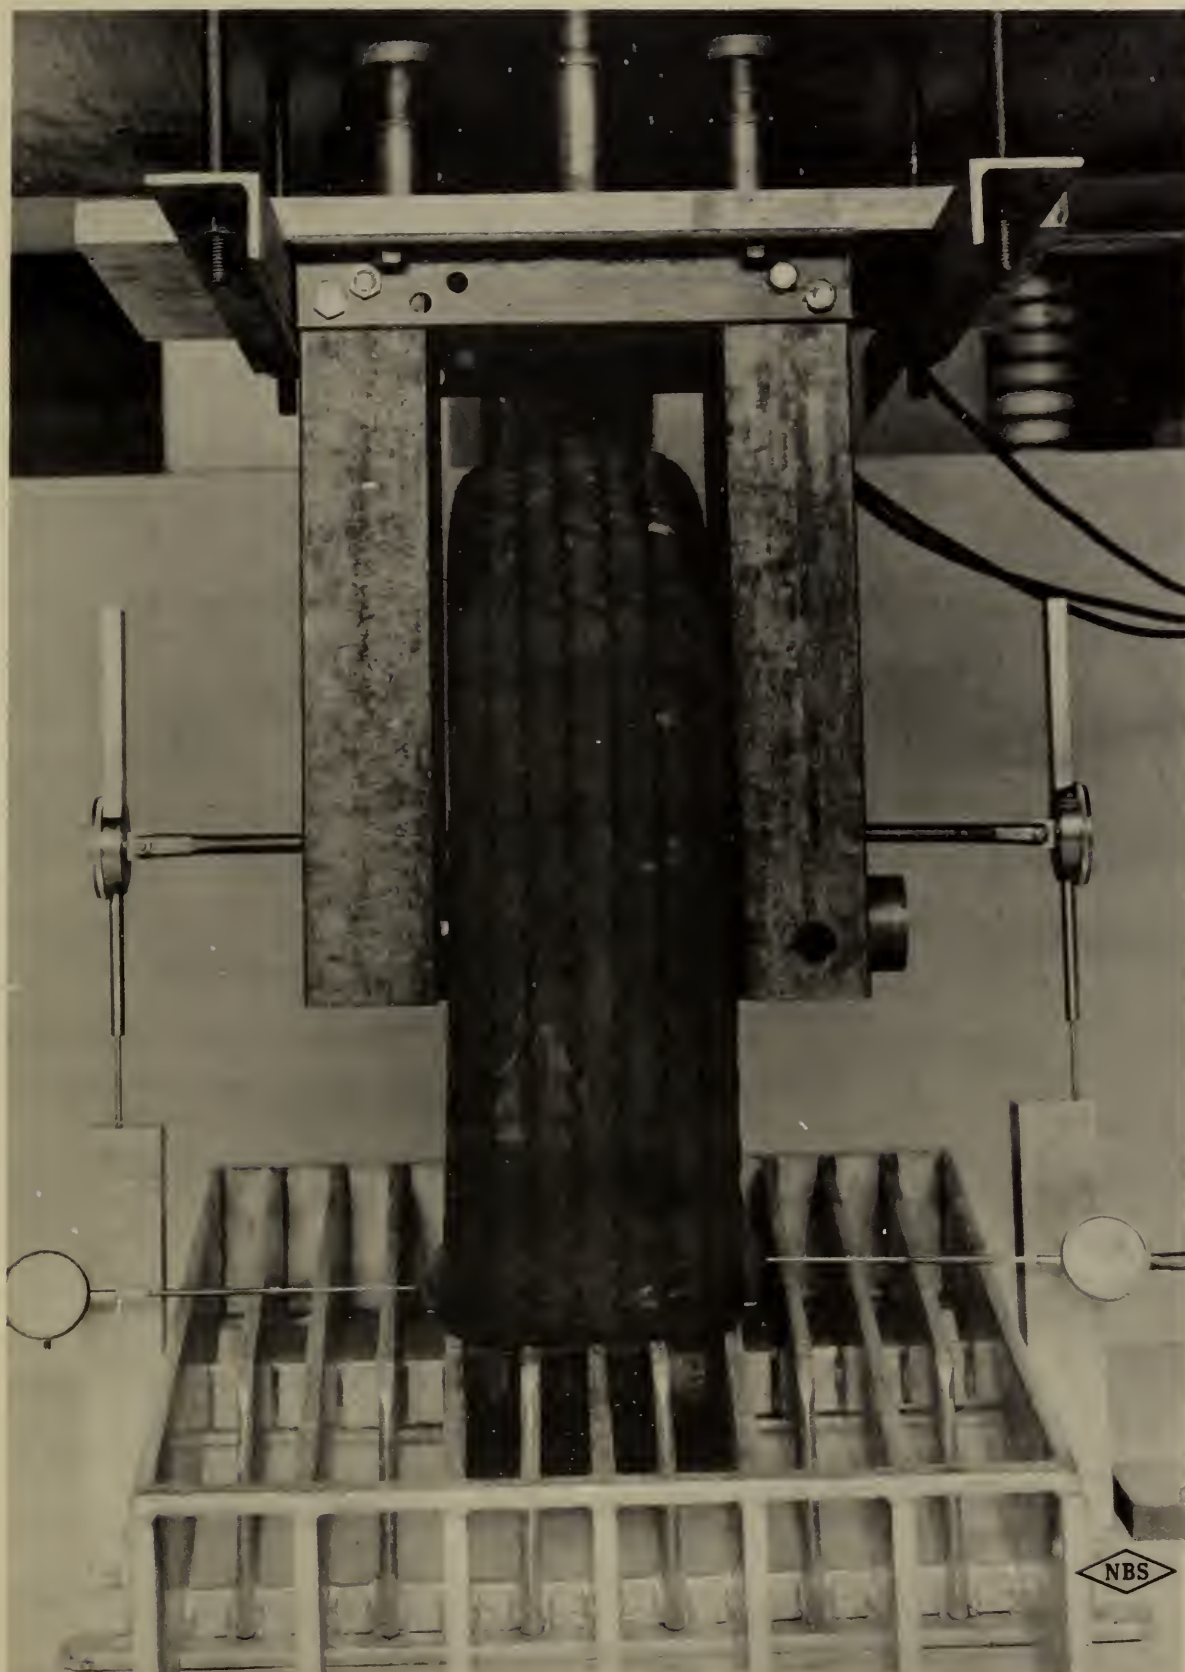


Figure 22. A 26x6.6 aircraft tire on five bars of a type 0200-SB "Elfaca" grating.
Load = 18,000 lb.

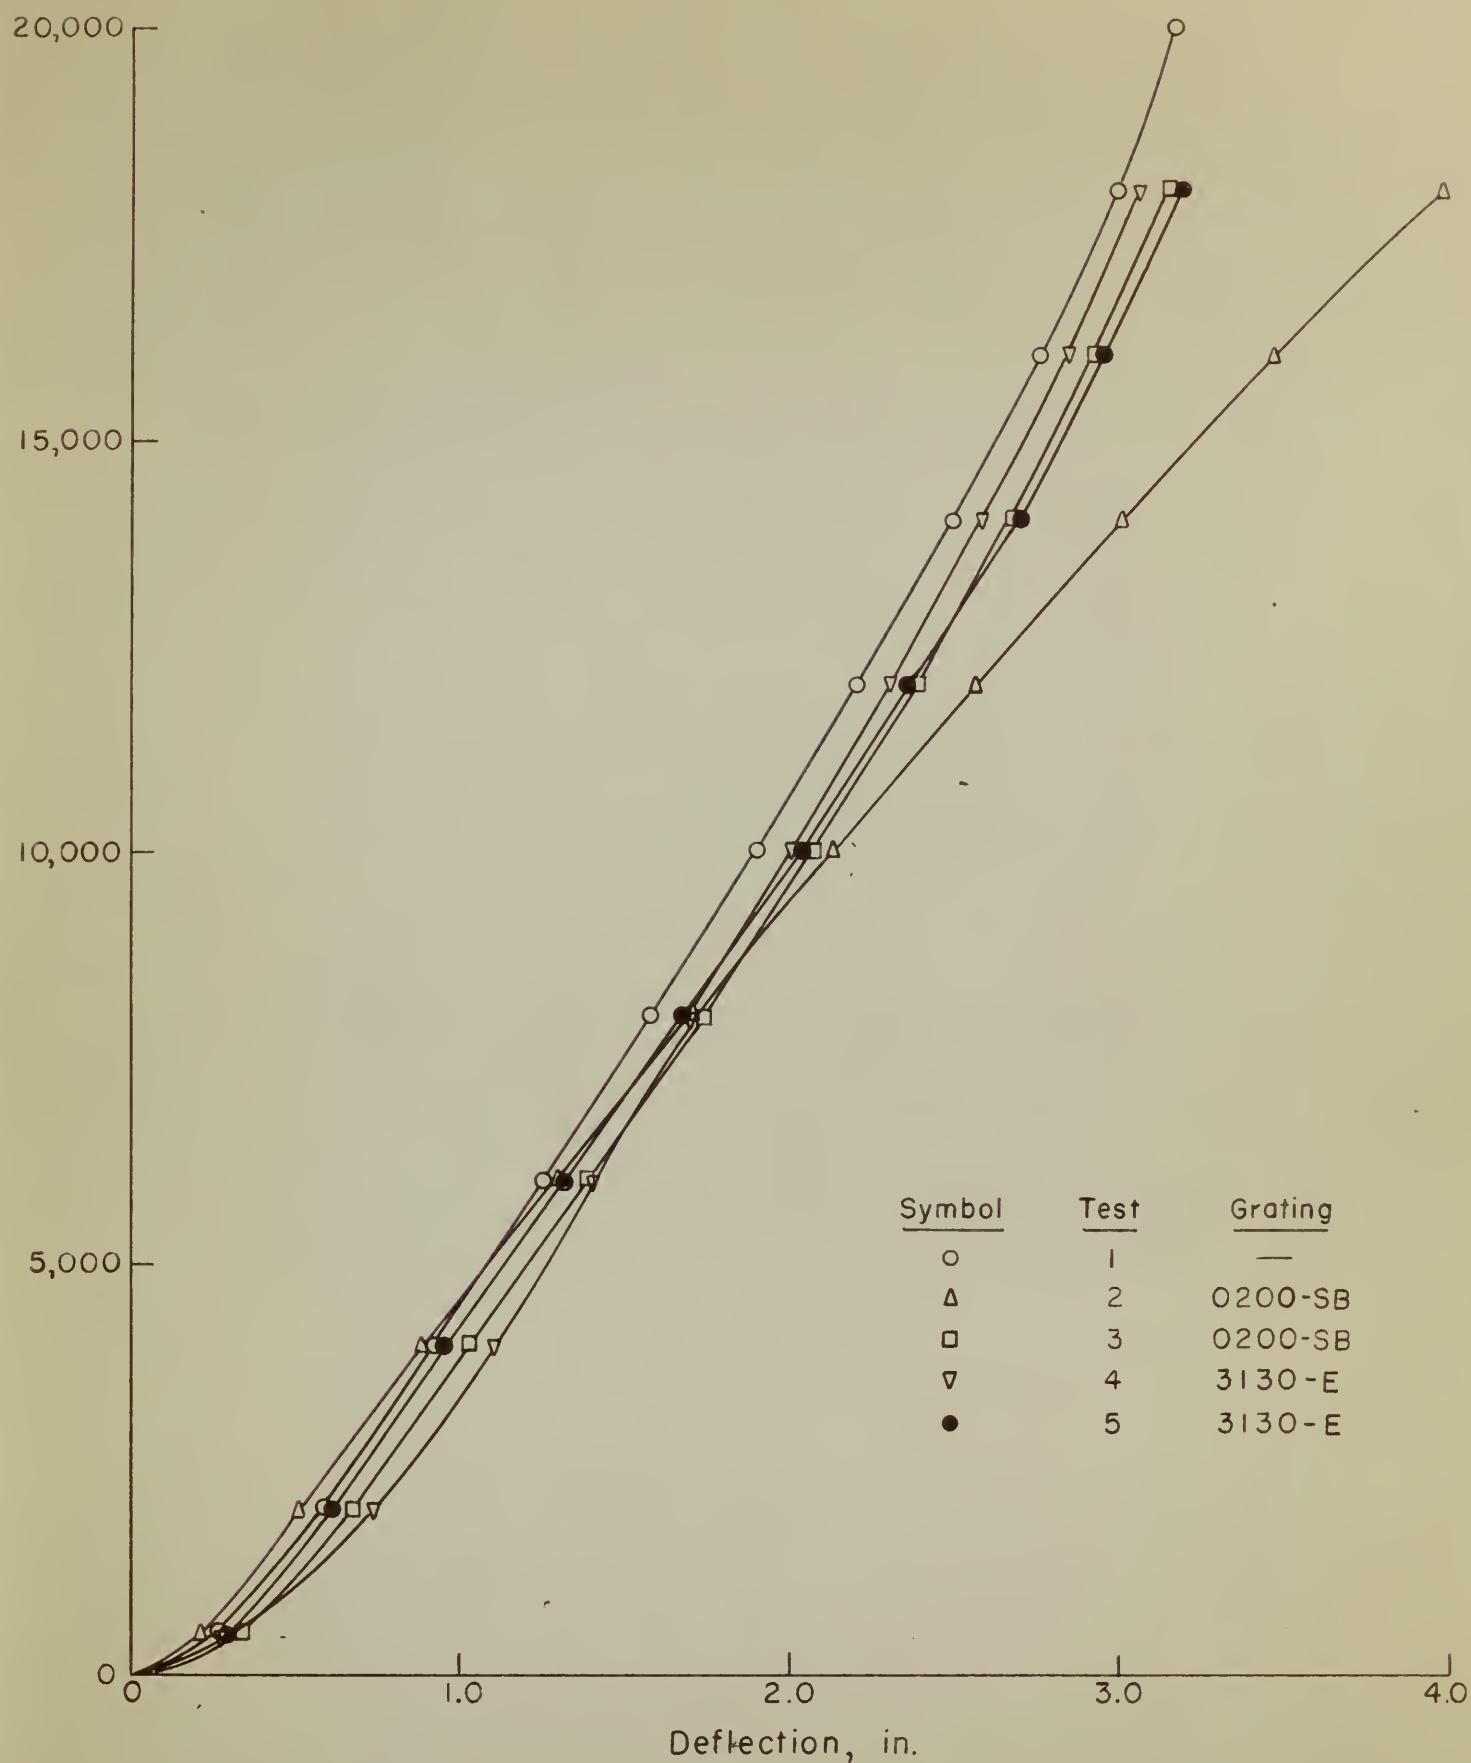


Fig. 23 Load-deflection relations for a 26 x 6.6 aircraft tire on "Elfaca" gratings.

THE NATIONAL BUREAU OF STANDARDS

Functions and Activities

The functions of the National Bureau of Standards are set forth in the Act of Congress, March 3, 1901, as amended by Congress in Public Law 619, 1950. These include the development and maintenance of the national standards of measurement and the provision of means and methods for making measurements consistent with these standards; the determination of physical constants and properties of materials; the development of methods and instruments for testing materials, devices, and structures; advisory services to Government Agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; and the development of standard practices, codes, and specifications. The work includes basic and applied research, development, engineering, instrumentation, testing, evaluation, calibration services, and various consultation and information services. A major portion of the Bureau's work is performed for other Government Agencies, particularly the Department of Defense and the Atomic Energy Commission. The scope of activities is suggested by the listing of divisions and sections on the inside of the front cover.

Reports and Publications

The results of the Bureau's work take the form of either actual equipment and devices or published papers and reports. Reports are issued to the sponsoring agency of a particular project or program. Published papers appear either in the Bureau's own series of publications or in the journals of professional and scientific societies. The Bureau itself publishes three monthly periodicals, available from the Government Printing Office: The Journal of Research, which presents complete papers reporting technical investigations; the Technical News Bulletin, which presents summary and preliminary reports on work in progress; and Basic Radio Propagation Predictions, which provides data for determining the best frequencies to use for radio communications throughout the world. There are also five series of nonperiodical publications: The Applied Mathematics Series, Circulars, Handbooks, Building Materials and Structures Reports, and Miscellaneous Publications.

Information on the Bureau's publications can be found in NBS Circular 460, Publications of the National Bureau of Standards (\$1.25) and its Supplement (\$0.75), available from the Superintendent of Documents, Government Printing Office. Inquiries regarding the Bureau's reports and publications should be addressed to the Office of Scientific Publications, National Bureau of Standards, Washington 25, D. C.

