

W1.35:10-460
Document
Reserve

TM 10-460

KNOWLEDGE

ATTITUDE

ABILITY

HABITS

JUDGMENT

PHYSICAL
FITNESS

EXPERT DRIVING
KEEPS 'EM ROLLING

MENTAL
FITNESS

NON-CIRCULATING



DRIVER'S MANUAL

UNITED STATES ARMY

DRIVER'S CERTIFICATE

SUBJECT: Driver's Manual.

TO: The Motor Transport Officer.

1. I acknowledge receipt of one Driver's Manual, covering the operation and maintenance of Government vehicles.

2. a. I have carefully read and understand this Driver's Manual.

b. I will follow its instructions and advice to the best of my ability.

c. I will keep the Manual with me for information and ready reference whenever I am driving.

(Signature and Grade)

(Organization)

NOTE.—When you receive this copy of the Driver's Manual, read it carefully. Ask your noncommissioned officers about anything which is not clear. Then tear out this card, sign it, and give it to your first sergeant or truckmaster.

↓ Cut along fold

↓ Cut along this line

DRIVER'S MANUAL

CHAPTER 1. You and your vehicle.	Paragraph
You.....	1
Your vehicle.....	2
You and your vehicle.....	3
CHAPTER 2. Protecting your vehicle from abuse.	
Helpful reminders.....	4
Faulty starting.....	5
Gears are useful.....	6
Selecting speeds with the transfer case.....	7
Using the clutch.....	8
Maximum and minimum speeds.....	9
Braking.....	10
Braking a trailer.....	11
Attaching a trailer.....	12
Backing a trailer.....	13
Front-axle drive.....	14
Safe operation on hills.....	15
Driving tips.....	16
CHAPTER 3. Getting there safely.	
SECTION I. Whenever you are driving.	
Motor vehicle accidents weaken our war effort.....	17
Clear signals are essential to safety.....	18
Signals do not relieve you of responsibility.....	19
Slowing down and stopping.....	20
Safety in overtaking and passing.....	21
Let the other fellow pass you safely.....	22
Would you drive blindfolded?.....	23
You can look only one way at a time.....	24
Negotiating that curve.....	25
Stopping a skid.....	26

CHAPTER 3. Getting there safely—Continued.

SECTION I—Continued.

Paragraph

Backing.....	27
Using side lanes to turn.....	28
Low bridge.....	29
Bridge loads.....	30
Halting and parking.....	31
Animals.....	32
Fogs.....	33
Night driving with lights.....	34
Hand cranking.....	35

SECTION II. Driving solo.

General.....	36
Finding your way.....	37
"Rules of the road".....	38
Keep to the right.....	39
Don't hog the road.....	40
Left turns.....	41
Right-of-way.....	42
Obey traffic directions.....	43
Crossing railroad tracks.....	44
Speed increases danger in four ways.....	45
Following other vehicles.....	46
Passing standing vehicles.....	47
School busses.....	48
Horn blowing.....	49
Hold that wheel.....	50
Cross walks.....	51
Fire hydrants.....	52

SECTION III. Driving in a motor march column.

Control by the column commander.....	53
Your responsibility in a march column.....	54
The column commander wants safe operation.....	55
Observe general safety precautions.....	56

CHAPTER 3. Getting there safely—Continued.

SECTION III—Continued.

Paragraph

Right-of-way of a small motor march column.....	57
Right-of-way of a large motor march column.....	58
Faster-moving vehicles.....	59
Safe distances in column.....	60
Signals.....	61

CHAPTER 4. Difficult terrain: Bad roads and cross country driving.

General.....	62
Front-axle drive.....	63
Chains or traction devices.....	64
Winches—use the winch properly.....	65
Reducing strain on a winch rig.....	66
Mud and sand.....	67
Fording streams.....	68
Swamps and soft-bottom streams.....	69
Steep grades.....	70
Driving over hilltops.....	71
Crossing ditches.....	72
Crossing trenches.....	73
Hard ruts or tracks can throw you.....	74
Soft ruts.....	75
Wooded country.....	76
Winter conditions.....	77
Driving in deserts, sand, or dust.....	78

CHAPTER 5. Safe driving in warfare or maneuvers.

Theater of operations.....	79
Simulated war conditions.....	80
Special traffic regulations.....	81
Observe and comply with all regulations.....	82
Foreign rules of the road.....	83
General safety precautions apply.....	84
Blackout driving.....	85

CHAPTER 6. Four hidden enemies.	Paragraph
Fire	86
Risky riding	87
Unsafe loading	88
How to load	89
Special cautions in loading	90
Carbon monoxide	91
CHAPTER 7. Preventive maintenance.	
Preventive maintenance is essential to victory in war	92
Preventive Maintenance Schedule (P. M. S.)	
No. 2—"Daily after operation"	93
Preventive Maintenance Schedule (P. M. S.)	
No. 3—"Daily before operation"	94
Preventive Maintenance Schedule (P. M. S.)	
No. 4—"Daily during operation"	95
Preventive Maintenance Schedule (P. M. S.)	
No. 5—"At halt"	96
Preventive Maintenance Schedule (P. M. S.)	
No. 6—"Weekly"	97
Lubrication	98
CHAPTER 8. If something goes wrong.	
Some trouble may arise	99
What to do	100
If you are in a motor vehicle accident	101
What is an accident?	102
Always stop and investigate	103
Take precaution against further accident	104
Aid to injured	105
Precautions against fire	103
Summon the proper authorities	107
Using separate messengers	108
Reporting by telephone	109
Making out an accident report	110
APPENDIX. An accident report, properly filled out	Page 104

ph
86
87
88
89
90
91

CHAPTER 1

YOU AND YOUR VEHICLE

1. **YOU** are a soldier-driver. You have an important and responsible job in operating a motor vehicle. The Army depends on its drivers for the mobility it needs to win a war.

Soldier-drivers have tough jobs because they drive under tough conditions. If you expect to do this type of driving without getting hurt and without causing injuries or damage, you must be not only qualified, but also dependable.

92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
22

studied recently, one or more of the drivers had been drinking. A soldier may get in trouble for being intoxicated, but driving a motor vehicle while intoxicated is a far more serious offense.

d. Relief for drivers.—When you have an assistant driver available, the easiest course is to have him take over if you become temporarily unfit. If you have none, ask your immediate superior for relief.

No matter what the cause of your temporary unfitness, be sure that you make those in authority realize that you are trying to protect life and property. If your immediate superior will not act, go higher, if necessary.

e. Pulling to side of road to rest.—If you are operating outside of a march column, and have no assistant driver when you find yourself temporarily unfit, it is best to pull over to the right side of the road, well clear of all traffic, and rest until you are fit. If the delay will be long, you should communicate, if possible, with the officer under whose direction you are operating, or one of his assistants.

2. YOUR VEHICLE is a carefully engineered piece of machinery, easy to operate but easier to damage or destroy by carelessness and neglect. Even the "jeep" ($\frac{1}{4}$ -ton truck) is a high-powered machine. Treat it with respect.

3. YOU AND YOUR VEHICLE.—As a soldier you pay particular attention to your equipment, clothes, and rifle or pistol. You take personal pride in keeping them clean, neat, orderly, and always ready to use. This same pride and desire for personal recognition should encourage you to take care of your assigned vehicle and its equipment intelligently and regularly. Carelessness or indifference in using and maintaining your vehicle leads to unnecessary work, delay, and a bad record as a soldier.

You are responsible for the safe operation and proper care of your vehicle. So be smart—don't let it down and it won't let you down.

CARE TODAY—HERE TOMORROW.

CHAPTER 2

PROTECTING YOUR VEHICLE FROM ABUSE

4. **HELPFUL REMINDERS.**—You know how to drive well. However, here are some reminders that you'll find very useful in protecting your vehicle from abuse.

5. **FAULTY STARTING** may injure the vehicle.

a. *Long-continued cranking of the engine* with the starting motor discharges the battery very rapidly and may shorten its life. You should not keep your foot on the starter for periods longer than 10 or 15 seconds.

By disengaging the clutch when you use the starter, you reduce the load on the starting motor and on the battery.

If the engine fails to start after being cranked several times, check the whole fuel line for leaks or stoppage and check the ignition system for loose connections or short circuits. Running down your battery won't start the engine, if the engine isn't getting fuel or spark.

b. *Racing a cold engine.*—It takes time for the oil in a cold engine to circulate to all parts. If the engine is raced while cold, these under-lubricated parts will wear quickly, and possibly score the cylinders and seriously damage the engine. *Therefore, warm up a cold engine as slowly as it will run.*

c. *Using the choke.*—When you pull out the choke it gives more gasoline to the carburetor. To start your engine when it is cold, use the choke, but use it as little as possible so as to avoid flooding the carburetor or diluting oil with gasoline. Whenever possible, start warming up your engine far enough ahead of time that you won't have to run your vehicle with the choke out. The necessary warm-up period may vary from half a minute to half an hour according to the weather.

6. **GEARS ARE USEFUL.**—Shifting gears on a motor vehicle permits enough turning effort to be applied to the wheels for the load, grade, speed, or road conditions under which the

vehicle is traveling. Allowing the engine to labor is a most effective means of burning out crankshaft bearings. Therefore, use sound judgment in selecting the proper gear. Always drive in a gear that will allow you to accelerate, if necessary.

It is exceedingly bad practice to wait until the last minute to shift gears. The experienced driver, anticipating the need for changing gears, shifts in time to keep his vehicle from losing momentum.

7. SELECTING SPEEDS WITH THE TRANSFER CASE.—

a. Two-speed transfer case.—When the going is good, that is, on most hard pavements, leave the transfer case in high range and shift gears in the transmission only.

Use the low range of the transfer case whenever driving off the road or when the going is tough—that is, for rough terrain, mud, sand, and steep grades—again shifting gears in the transmission only.

If your transfer case is in high range and you have to shift to low range, slow down almost to a standstill, and shift by double clutching (par. 8*d*). You can shift from low range to high range at any usual speed.

b. Three-speed transfer case.—A limited number of Army vehicles have three-speed transfer cases.

Use the low range (underdrive) for the same driving conditions as the low range in the two-speed transfer case, and shift to it in the same way.

Use the high range (direct drive) for fully loaded vehicles on hard surfaced roads in rolling country. You can shift to this range at any usual speed.

Use the overdrive range on hard surfaced roads, for lightly loaded vehicles in rolling country or for fully loaded vehicles in flat country. If you are an inexperienced driver, slow the vehicle almost to a standstill before you shift, but if you are expert, you may be able to do it at greater speed.

8. USING THE CLUTCH.—*a. Get the "clutch feel".*—The

DON'T GAMBLE WITH DEATH.

clutch provides a means of applying the engine power to the wheels smoothly and gradually.

Get the "feel" of your clutch; that is, know just where it starts to engage, how far the pedal travels until it is fully engaged, how much slack there is in the pedal, and how fast you should let the clutch in.

b. The clutch in starting.—When starting to drive the vehicle, let the pedal come back to the point of engagement and then engage the clutch gradually, at the same time depressing the accelerator at a rate sufficient to maintain the speed of the engine.

c. The clutch and the gearshift.—When you shift from one gear to another, engage the clutch smoothly—though more rapidly than when starting, because in this case the clutch does not have to slip (as it does when starting) if you have shifted properly.

d. Double clutching.—Good drivers often use double clutching to engage the gears smoothly by synchronizing the speeds of the gears before engagement.

Shifting to a lower speed by double clutching is done as follows—(1) depress the clutch pedal; (2) move the gearshift lever to neutral position; (3) release the clutch and at the same time depress the accelerator until the engine speeds up somewhat; (4) depress the clutch pedal; (5) move the gearshift lever to the next lower speed; (6) release the clutch pedal and at the same time depress the accelerator to maintain the speed of the engine as the load is again connected to it by the re-engagement of the clutch.

The procedure is the same for shifting to a higher speed, except that the engine is not accelerated while the gears are in neutral.

Double clutching sounds rather complicated but it becomes almost automatic with practice.

e. Don't "ride" the clutch.—Keep your foot off the clutch ex-

YOU CAN'T AFFORD TO LOSE—EVEN ONCE.

MSU LIBRARY

cept when starting, stopping, or shifting. Even a slight continued pressure on the clutch pedal wears out the facings and throwout bearing of the clutch. For the same reason, when stopped on a hill, never slip your clutch to prevent your vehicle from rolling back. Use your brakes instead.

9. MAXIMUM AND MINIMUM SPEEDS.—Your vehicle is not designed to operate above a specified maximum speed, or below a specified minimum speed, in each gear.

a. Maximum speeds.—The caution plate (fig. 1) shows maximum speeds for each gear. (These are given as the maximum engine rpm for any gear if the vehicle is equipped with a tachometer.)

Excessive speeds will damage the engine. These can occur when your vehicle is coasting downhill in gear or when the governor is not working properly. Furthermore, operating at maximum speed or "against the governor" is risky because you have

MAXIMUM PERMISSIBLE ROAD SPEEDS IN THE FOLLOWING GEAR POSITIONS		
TRANSMISSION IN	TRANSFER CASE IN	
	HIGH RANGE	LOW RANGE
OVERDRIVE	45	20
DIRECT	37	16
THIRD	20	9
SECOND	10	4
FIRST	6	2
REVERSE	6	2
BASED ON 2750 R.P.M. ENGINE MAXIMUM SPEED		
6.6 - 1 AXLE RATIO & 7.50 - 20 TIRES		

FIGURE 1.—Typical caution plate.

COURTESY, CONSIDERATION, AND COMMON SENSE.

no reserve speed if you suddenly need to accelerate to avoid an accident. So, keep *below* the maximum shown for each gear.

b. Minimum speeds.—Operating at too low an engine speed, or allowing the engine to “labor,” overloads the engine and will damage it. Shift gears before the engine starts to labor, and save the engine.

10. BRAKING.—The purpose of the brakes is to reduce speed, stop the vehicle, and hold it in place when stopped.

a. Use engine as brake.—Whenever you apply brakes, heat is generated and some of the lining is worn away. If you hold them on continuously, the brake lining may be burned. Save your brakes by using your engine to slow your vehicle down, and your brakes merely to assist the engine. Think ahead. Begin to slow down early by taking your foot off the accelerator while *leaving the clutch engaged*. Then apply the brakes firmly but gradually so as to stop quickly but without shock to the vehicle or jarring the load. Remember that increasing the load increases the stopping distance.

Leave the clutch engaged until your vehicle has almost stopped. With a little practice you will learn just when to disengage it to keep the engine from stalling.

b. Hand brake.—The hand brake is designed to hold the vehicle when it is not moving. Do not use it to stop or to slow down unless necessary. The foot brake is far more effective and won't crack an axle shaft or a propeller shaft.

11. BRAKING A TRAILER.—If a trailer or artillery weapon is attached to your vehicle, safe braking requires additional care, especially on down grades.

a. Jackknifing.—When the momentum of your tractor (towing vehicle) is reduced, the trailer has a tendency to “run up” on the tractor. The greater the load on the trailer, the greater is that tendency. This might jackknife your vehicle—that is, cause the trailer to swing to one side of the tractor and fold up on it like the action of the blade of a jackknife when you close it. This

DON'T DRIVE WITH YOUR HORN.

may throw the vehicle out of control and cause a serious accident.

When you use only your engine or your tractor brakes to slow down, there is no braking power on the trailer wheels, and jackknifing may occur.

Heavy trailers have brakes to reduce the momentum and avoid jackknifing, but if your trailer has no brakes, it is especially important to apply tractor brakes gradually.

b. Hand-controlled trailer brake.—Some trailers and artillery weapons are equipped with brakes which you operate by a hand lever in the driver's cab. These work independently of the tractor brakes. Thus you can avoid jackknifing by applying your hand-operated trailer brakes first, so that you reduce the trailer momentum sooner than the tractor momentum.

You should do this whether you brake the tractor by engine or by brakes. But don't use the trailer brakes as an "anchor" by habitually applying them when they are not needed.

c. Automatically controlled trailer brakes.—On many tractor-trailer combinations the brakes are so designed that the tractor and trailer brakes operate together. The tractor brakes are mechanically prevented from operating ahead of those on the trailer. This will automatically avoid jackknifing when you use the brakes, but not when you use only the engine as a brake. You must always use the brakes at least enough to keep your trailer in control.

d. Know your tractor-trailer combination.—From the above you will realize that even an experienced driver must know more than just how his trailer brakes work. He must get their "feel" before he can handle a trailer safely. To be safe, be sure *you* know your trailer.

12. ATTACHING A TRAILER.—Trailed loads should be attached to the tractor by a lunette (on the trailed load) placed in a pintle hook (on the tractor). Make sure that the pintle latch is closed and secured before you move the trailed load.

DIM YOUR LIGHTS.

13. BACKING A TRAILER requires knowledge of your tractor-trailer combination, practice, and skill. When you first try to back with a trailed load, take it easy. Be sure you have plenty of room.

In backing a trailer to the right, the driver first manipulates his vehicle as though beginning a turn to the left. This action starts the trailer moving toward the driver's right. In backing a trailer to the left, the driver first manipulates his vehicle as though beginning a turn to the right. This action starts the trailer moving toward the left. Thus a skillful driver is able to back a towed load into a narrow space.

Until you are fully competent and fully familiar with your own particular combination, always have another man watch when you back it to warn you before the trailer becomes so cramped that it might cause damage. The 1-ton trailer requires particular skill—be careful with it.

14. FRONT-AXLE DRIVE.—*a. Use front-axle drive only as needed.*—When a front-axle drive is engaged, the average speed of the front pair of wheels is the same as the average speed of each pair driven by the rear-axle drive. Therefore, if the front or rear tires are worn or underinflated, their circumference is less than the circumference of the others, and one pair or the other must slip a little to cover the same distance. That wears tires.

Your front-axle drive provides additional traction when you need it, as in soft mud or snow, and on very steep grades, but it is unnecessary on dry hard roads, and its use wears tires and mechanism. It is ordinarily used only in off-the-road operation.

So save your tires, and save the transfer case and front-axle mechanism from unnecessary wear and tear. Keep the front-axle drive disengaged when you don't need it. Then both the front-axle drive and the front tires will probably be able to pull you out of a tight spot when you do need it.

SHOW YOUR BRIGHTNESS BEHIND THE WHEEL.

b. Know your front-axle drive.—It is impossible to shift into the low range of the transfer case without engaging the front-axle drive. Engage the front-axle drive first and then shift the transfer case.

You can engage or disengage the front-axle drive at any usual speed and in some vehicles at a stop. If you cannot do this with reasonable effort while the vehicle is stopped, it is probably one of those front-axle drives that can be engaged or disengaged only while the vehicle is in motion. Don't bend or break the control lever—try driving the vehicle.

It is generally more difficult to disengage the front-axle drive than to engage it. You can *engage* the front-axle drive without excessive effort if you do it right. If you can't shift readily while operating the vehicle, drive with the wheels turned or cramped until you can. Don't try to tear the shift handle out by its roots.

You can usually *disengage* the front-axle drive readily while operating the vehicle. If you still have difficulty, run the vehicle over a rough surface or bump on the road or run the right tires on a rough shoulder of the road until you complete the shift. This should make it easy.

15. SAFE OPERATION ON HILLS.—It is risky to change gears while climbing a hill. Therefore, *before* starting up, select the gear which you think will get you to the top.

Do not depend on your brakes alone when on a steep hill. If the road is slippery, and the vehicle starts to slide down (either forward or backward) you cannot steer it with the wheels locked. If you have to stop, and the brakes fail to hold, the vehicle will roll downhill and you probably cannot shift into any gear to control your speed.

a. Uphill.—If you stall the engine while climbing a steep hill and must back down, apply the foot brake, set the hand brake, disengage the clutch, and shift quickly into reverse.

If the vehicle does not slide or roll, start the engine while

the clutch is still disengaged and engage the clutch while releasing the brakes.

If the vehicle slides or rolls while the clutch is disengaged, reengage it immediately after shifting and release the brakes. If the engine does not start right off, use the starter.

Then back down, moving to the other side of the road, if necessary, to avoid backing against traffic.

b. Downhill.—As a trained driver, you know that the engine can be used for braking. You also know that using brakes on down grades not only wears them excessively, but heats them and may burn them out. If they burn out, you may lose control of your vehicle.

To use your engine as a brake, proceed as follows—

(1) When you approach a down grade, first select a suitable gear. A good rule for driving downhill is to use the same gear in which you would drive up the same hill. Have that gear engaged *before* the vehicle starts down. On grades over 30 percent use the lowest gear.

(2) As long as you keep your foot off the accelerator, the engine will resist the tendency of your vehicle to roll faster, because the wheels will be driving the engine through the clutch, instead of the engine driving the wheels. The result is effective and safe braking.

If the braking power of your engine isn't enough to keep your vehicle at a safe speed, use the foot brake also.

c. Be kind to your brakes.—In using the foot brakes on hills you should take the following precautions to prevent skidding, or overheated brakes—

(1) Apply the brakes firmly but not abruptly. Abrupt application with full force may lock the wheels and cause your vehicle to slip or skid out of control.

(2) Apply the brakes at intervals, only as you need them.

d. Coasting downhill with the clutch out or with the transmis-

DON'T HESITATE TO LUBRICATE.

sion in neutral, or attempting to change gears after you have started downhill is dangerous. A vehicle gains momentum rapidly on down grades. If the transmission is in neutral, the speed may be too great to mesh the gears. The vehicle may then get out of control, become a runaway, and not only spoil your reputation as a good driver, but endanger life, limb, and property.

Do not coast downhill with any low gear, or reverse engaged, and with the clutch disengaged; this may ruin the clutch.

Never step on the starter while the truck is rolling backward and gears are engaged, even though you are holding the clutch pedal down. Go into neutral before using the starter.

e. Runaway vehicles.—If the braking effects of both the engine and the brakes fail to hold your vehicle and it starts to run out of control down a hill, the last resort is to ditch the vehicle, running it off the road against a bank if possible, at a sharp angle. This must be done promptly, before the runaway vehicle has gained too much speed. By prompt ditching in such an emergency, you may prevent a much more serious accident.

f. Look out for excessive "revs" while going downhill. Your engine probably has a governor that limits the rpm under ordinary circumstances. But when you are going down a hill and using your engine as a brake, the governor doesn't help.

What happens is this: The wheels are connected with the engine. Thus the momentum of your vehicle causes the engine to turn over more rapidly, and the lower the gear you are using, the faster your engine is forced to turn over in proportion to the speed of your vehicle.

Hence, when you are driving downhill in a low gear, if you let your vehicle roll too fast, the engine may easily be turned over so rapidly that it can't stand the strain. Bearings may burn out. Parts may fly apart. *This sad fate has happened to many an Army vehicle—with a poor driver.*

NO PEDESTRIAN EVER KILLED A TRUCK.

Avoid that. When going down a hill, notice what gear is engaged. Read the caution plate on your panel. Use the foot brakes, as needed, to *keep your vehicle down to or below the maximum speed shown for that gear.*

16. DRIVING TIPS.—Good driving demands that you keep the following in mind:

a. Shut off the engine.—Idling the engine for long periods when the vehicle is not in motion wastes fuel. It is contrary to Army regulations. Never leave your vehicle unattended with the engine running.

b. It's not a ship.—If you must drive through water, go slowly and steadily, so that you won't splash water over the engine and stall it.

c. It's not a tank.—When one vehicle pushes another, the view of the man who controls the forward movement is obstructed by the vehicle head. That may cause accidents.

It is safer to pull vehicles than push them. Push only when no other practicable course is open.

Except in an emergency, do not use your vehicle to tow another unless both are provided with suitable and safe apparatus for towing.

d. Protect the tires.—Turn the front wheels as little as possible when your vehicle is standing still, to avoid wearing the tires and straining the steering mechanism.

Scraping curbs or tree stumps will damage the sidewalls, which are the weakest parts of the tires.

e. Adjustments.—Driving a vehicle that is out of adjustment will only cause more damage. Look out for signs of trouble. For example, a thumping in the steering gear may indicate that it is loose. If a correct adjustment is not made soon, the steering gear teeth may become pitted or broken off, ruining the steering assembly. Such a condition can put the entire vehicle out of service. Your preventive maintenance schedules (see ch. 7) outline the way to keep your vehicle in good order.

CARE TODAY—HERE TOMORROW.

CHAPTER 3

GETTING THERE SAFELY

SECTION 1

WHENEVER YOU ARE DRIVING

17. MOTOR VEHICLE ACCIDENTS WEAKEN OUR WAR EFFORT.—Thirty-four thousand five hundred people were killed in motor vehicle accidents in the United States in 1940. That is more than the number killed by air raids on England in the whole first year of the second World War, and is about equal to two whole divisions of troops.

One and a half million people were injured in all kinds of motor vehicle accidents during the same year. That is equal to the loss of several field armies. (See fig. 2.)

A recent study of the records of one maintenance unit of the Army showed that more than 80 percent of the vehicles being repaired were out of service because of accidents.

So, in addition to taking care of your own skin, you can see that keeping motor vehicle accidents from reducing our national effectiveness is a real job.

Only you—the individual soldier-driver—can do the trick for the Army.

18. CLEAR SIGNALS ARE ESSENTIAL TO SAFETY.—*a.* The average driver doesn't want to smash his vehicle or yours, so he will be careful to avoid a crash if you give him a reasonable chance. He is not a mind reader, however. Let him know what you are going to do. Signal whenever you intend to change direction, stop, or slow down materially. By so doing, you may prevent the other driver from crashing into you.

DON'T HELP AN ENEMY

**MOTOR VEHICLE ACCIDENTS PUT
ARMIES OF PEOPLE OUT OF ACTION**

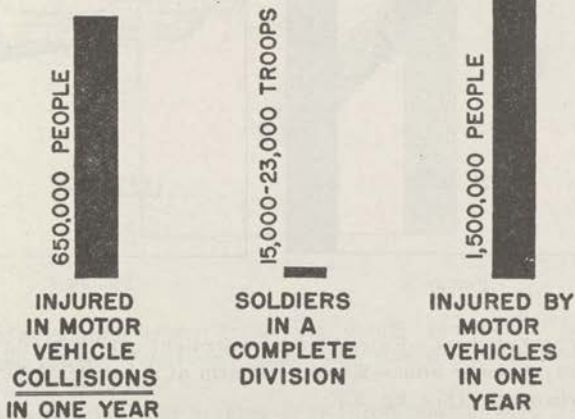


FIGURE 2.

Make your signals clear and definite. Give them in ample time. Make them last long enough, so that the other driver will see them. Remember he may not be looking all the time.

b. The following signals will clearly indicate your intentions. They are widely used. Therefore they are sure to be understood by the other fellow and will help you avoid trouble.

(1) *Right turn*.—Extend left arm at an angle of 45° above horizontal. (See fig. 3.)




FIGURE 3.




FIGURE 4.

(2) *Left turn*.—Extend left arm straight out. (See fig. 4.)

(3) *Slow or stop*.—Extend left arm at an angle of 45° below horizontal. (See fig. 5.)

(4) *Passing*.—Sound your horn before passing another vehicle except when darkness makes it possible to warn by flicking your headlight beams.

19. SIGNALS DO NOT RELIEVE YOU OF RESPONSIBILITY.—If there is a collision, the crash will be just as bad,

YOUR TRUCK MAY HAVE AN ALL-STEEL BODY

the damage just as great, and the injuries just as painful, whether you have signaled or not. So even if you have signaled, watch the other fellow, and play safe. He may not have seen your signal.

20. SLOWING DOWN AND STOPPING.—*a. Safety.*—Can you imagine how it would feel to be riding in a fast-moving motor vehicle that could not be slowed or stopped? Sooner or later you would end up in a crash. That is certain! Just as

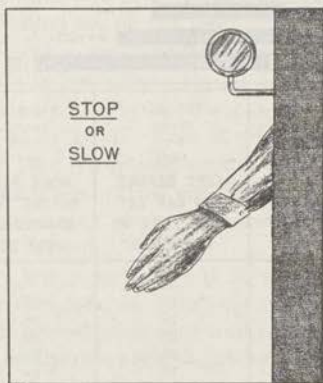


FIGURE 5.

certainly, you'll have a crash even though your vehicle has excellent brakes, if you can't make every stop within the necessary time and distance.

Do you think that braking is an instantaneous act? Look at figure 6. Remember that the vehicle rolls on while you are making up your mind to stop and keeps rolling while you are moving your foot to the brake and depressing the pedal. It will surprise you to know how far you roll before you can apply your

BUT YOU HAVEN'T.

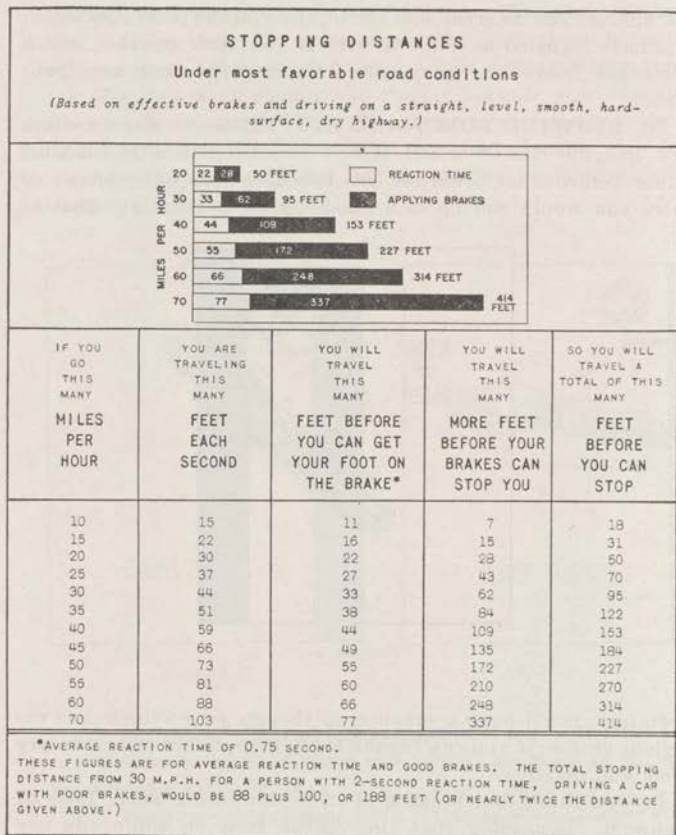


FIGURE 6.—It takes time to stop.

brake. Note that your vehicle goes 18 feet while you are reacting and stopping it from a speed of 10 miles per hour, but it travels 10 times as far when you try to stop it from 45 miles per hour.

To avoid crashes, allow plenty of time and plenty of space in which to make your stop.

b. Bad drivers make quick stops.—The ability to make a quick stop in an emergency may save your life. You should test your brakes and test yourself to be sure that you can stop so quickly that you almost "stand her on her nose."

But the driver who makes sudden stops a general practice is a poor driver. He is just asking for an accident.

The driver behind you may not be as quick as you are. His brakes may not be as good. Even if you signal, you may get rammed from the rear if you stop suddenly.

Sudden stops may also throw passengers forward and injure them. Sudden stops may cause your load to shift, resulting in damage or trouble for you.

Even when you test your brakes to be sure that you can stop suddenly in an emergency, be sure that no one is near enough to ram you from behind, and that any passengers or load are "set" and won't be thrown around. Always look in the mirror before slowing or stopping.

21. SAFETY IN OVERTAKING AND PASSING.—*a. Normal method of passing.*—The accepted rules of the road require you to pass on the left of a vehicle which you are overtaking. Signal by day with your horn, and by night, flick your lights. However, in heavy traffic where cars are constantly passing and drivers constantly alert, or when the military situation requires silence, it may be undesirable to use the horn. In a well lighted city street, the signal may be omitted.

b. In heavy traffic.—When you are driving in very heavy traffic, with two or more continuous columns proceeding in the

STOP MEANS STOP—NOT SLOW DOWN.

same direction, one column* may move faster than the others, or may move when the others are halted. In such case, it is safest to stay in your own column, and proceed at its pace, regardless of whether you pass on the right or on the left of other columns.

c. When the driver ahead signals a left turn.—When a driver ahead of you has signaled that he is going to make a left turn, and pulls to the left, you can pass safely on his right, *provided you proceed with caution* and can see that no vehicle is approaching on the intersecting road.

d. There is always danger in passing.—If in order to overtake and pass another vehicle, you have to drive into a lane in which traffic is moving in the opposite direction, you must be extremely cautious and skillful in estimating distances and judging speeds. A mistake in judgment may cause a head-on collision with another vehicle. (See fig. 7.) Head-on collisions are no joke. Use care and avoid them.

Be sure that you can see, that you have plenty of room and plenty of time to get by, before you try to overtake and pass another vehicle.

e. You're blind when you pass at intersections.—When you overtake and correctly pass another vehicle on its left, the vehicle which you are passing cuts off your sight toward the right. (See fig. 8.) Hence, to avoid collisions, don't pass where someone may shoot out of a blind space at your right. That means don't pass at intersections.

*To conform to long established military usage, the military term "column" is used to describe a formation in which units are one behind the other, instead of the civilian term "line," which the Army reserves for a formation in which the different elements are abreast of each other.

Similarly, "distance" is used to express space between units in column, while "interval" is used to express space between units in line (FM 22-5).

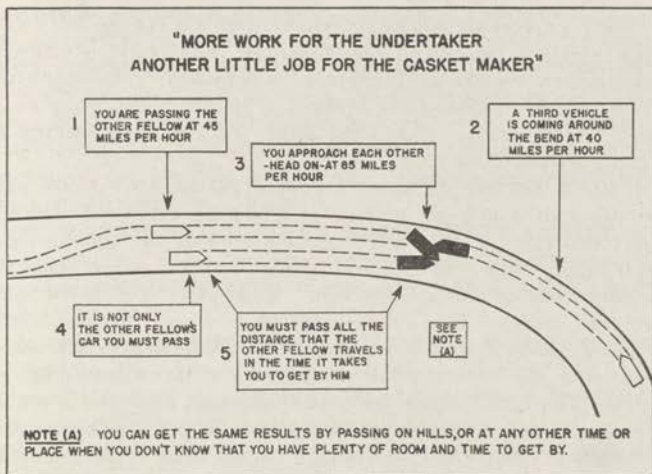


FIGURE 7.

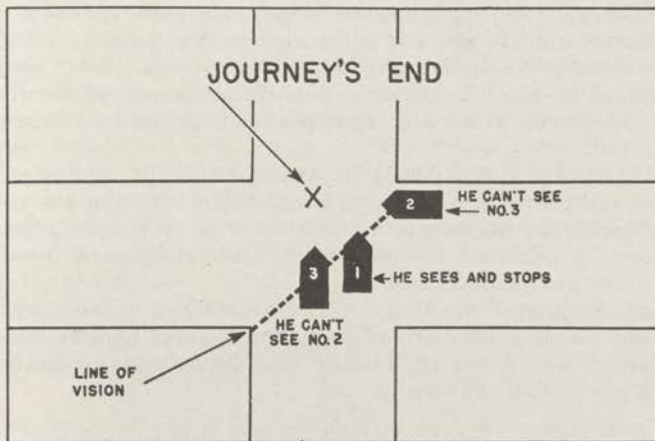


FIGURE 8.

When a driver signals and slows or stops his vehicle for a left turn, and you pass it on the right, the vehicle which you are passing now creates a blind space at your left. The only way to be safe is to slow down enough so that you can "stop on a dime" if necessary. Pass only after you are sure nothing is coming on the cross road.

f. Avoid passing on blind hills and curves.—No driver can see through a hill—so neither you nor the fellow coming up the other slope knows that the two vehicles are approaching each other. It's just as hard to see around a curve and just as dangerous to pretend you can. So don't pass on blind hills or blind curves. The only exception is where there are two or more clearly defined lanes marked for traffic *in your direction*.

g. Give the other fellow room.—To avoid sideswiping or forcing him into a ditch, wait, after passing, until you get well ahead of him before pulling back into column. Don't "cut in." Give extra room when you have a trailed load. Trailed loads sometimes bounce.

22. LET THE OTHER FELLOW PASS YOU SAFELY.—

When *you* are passing another vehicle, you hope the driver of that vehicle will give you room to get back in column. When he is doing the passing, give him the same break. Don't speed up and keep him in the other lane where he may collide with a car coming in the opposite direction or be forced to cut in on you.

23. WOULD YOU DRIVE BLINDFOLDED?—No man in his right senses would drive blindfolded. Yet you are just about as bad off when your vision is cut off by hills, buildings, trees, signs, fences, or other obstructions. Even a windshield sticker may be dangerous.

a. Keep your eyes open.—Unfortunately you can't avoid blind places. They are all over the country. Suppose someone suddenly comes from behind that obstruction to your line of sight. Can you stop?

DON'T TAKE CAT NAPS WHILE DRIVING.

At least you can be prepared. You can be sure that you are on the proper side of the road; you can proceed cautiously, alert, and ready to act quickly if necessary to avoid a collision.

b. Scrape off that sticker.—A 2½-ton truck may be hidden by a 2½-inch windshield sticker in your line of sight when the truck is so close that even at 25 miles per hour you can't stop in time. Scrape that sticker off. Put any required sticker well out of your line of sight.

24. YOU CAN LOOK ONLY ONE WAY AT A TIME.—To avoid crashes, keep your eyes on the road. Don't make the same mistake as the driver in figure 9. LOOK where you are going.

25. NEGOTIATING THAT CURVE.—*a. Centrifugal force is fighting you.*—If you attach a string to a weight and swing it rapidly around your head, it will go in circles *as long as the string holds*. But if the string is not strong enough, it will break. The weight will no longer follow the curve but will fly off in a straight line like the weight in a hammer-throwing contest. That is an example of centrifugal force.

Similarly, when your vehicle first starts to take a curve, its forward momentum tries to make it continue in a straight line. As it turns, centrifugal force tries to make it fly off the curve like the weight from the string. (See fig. 10.) But, like the string, the friction of your tires on the ground holds your vehicle and makes it go forward around the curve. If the friction is strong enough, the vehicle will stay on the curve, (unless its load is top heavy, in which case it may turn over). But if the centrifugal force is stronger than the friction, your vehicle will fly off the road like the weight when the string breaks.

Centrifugal force depends upon speed. If you swing that weight on the string slowly, the centrifugal force is not strong enough to break the string. Even if you let go of the string,

YOU HAVEN'T NINE LIVES.

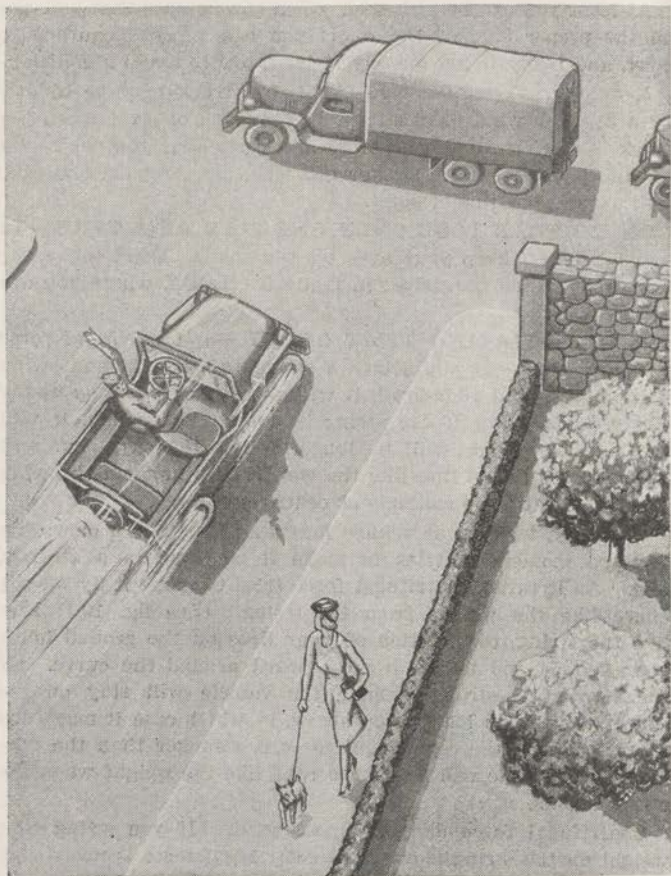


FIGURE 9.—But what about that truck?

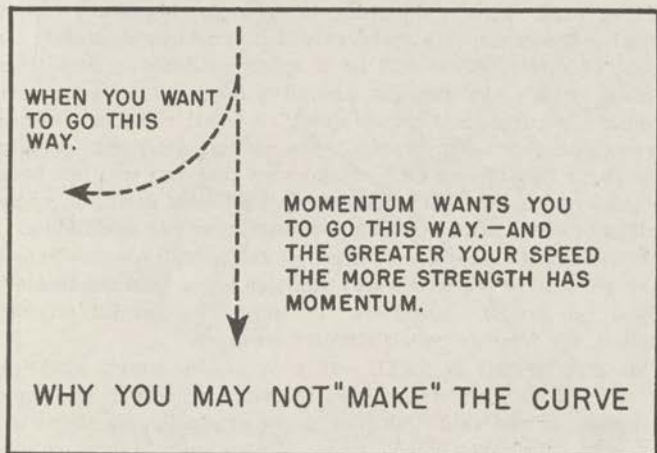


FIGURE 10.

the weight will not fly far. Swing it very rapidly and let go, however, and the weight will fly off with great force.

So it is with your vehicle. For example, when an 11,000-pound truck turns a curve with a radius of 500 feet, at 20 miles an hour, the friction which holds it in the circle must overcome a centrifugal force of only 583 pounds. At 30 miles per hour, however, the centrifugal force is 1,312 pounds, and at 50 miles per hour it is 3,644 pounds—more than six times as great as at a 20-mile speed. As with the weight on the string, the instant centrifugal force becomes stronger than the friction which holds your vehicle on the turn, the vehicle will fly off the curve.

b. How to round the curve.—When you are approaching a curve it is impossible for your eye alone to let you judge accurately the speed at which you can "take it," without running

BRAKE THE TRAILER FIRST.

off the road. Hence, the thing to do is to *slow down before entering the curve*, to a speed at which you have absolutely no doubt of safety. That will be a speed considerably less than that at which you can get around safely. So as you start around the curve, and get its "feel," it is all right to increase your speed gradually, provided you do not accelerate rapidly enough to risk "flying off." Make sure that you will not have to take your foot off the accelerator. To slow down, or apply brakes or coast after entering the curve may cause skidding.

Well-banked curves can be taken at fairly high speeds—unless they are banked the wrong way (outside lower than the inside). These are doubly dangerous. Be especially careful on wet asphalt, icy roads, or other slippery surfaces.

26. STOPPING A SKID.—If your vehicle starts skidding in spite of all precautions, turn the front wheels in the same direction as the skid and slow down gradually, as shown in figure 11. The skid will be worse if you apply brakes, or suddenly take your foot off the gas, or turn the wheels in the opposite direction from the skid.

When the vehicle stops skidding, apply power gradually to bring it back to the proper position on the road.

27. BACKING.—When you back, even for a short distance, have your assistant driver, or any other person available, get out and signal whether or not all is clear. If no one is available, get out of the cab and make sure that no one, and nothing, is behind you before you back up. You may prevent damage to your vehicle or even save a life.

28. USING SIDE LANES TO TURN.—When you use a traveled side lane or a driveway to gain space in making a turn, you will be safer if you back in the least dangerous direction. For example, *back* into an unused driveway. Then you can come out front first and see where you are going.

29. LOW BRIDGE.—For the safety of your vehicle, your

DRIVE CAREFULLY.

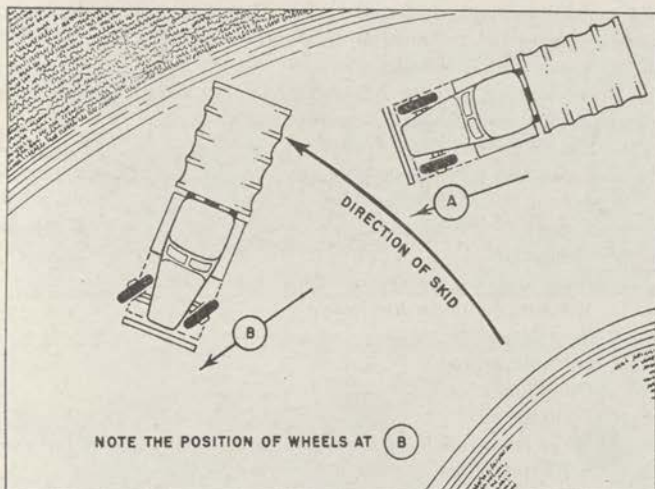


FIGURE 11.—Position of wheels when stopping skids.

load, or your passengers, make sure that you know just how high it is.

Many bridges and tunnels have the clearance marked in feet and inches. At these points, if you know how much overhead clearance you need, you will be safe and will not be delayed.

Whenever a bridge, or other overhead structure looks low, have your assistant driver, if any, get out and watch the clearance, signaling to you whether it is safe to proceed. Whether you have an assistant driver or not, advance very slowly until you are sure you can clear.

30. BRIDGE LOADS.—Keep in mind the weight of your vehicle and load. It may be too heavy for some bridges or culverts. Most such structures have signs prominently displaying

AVOID THAT RUN-DOWN FEELING.

the maximum load they will hold. Remember it is better to ford a stream or go around to another bridge than to crash through one that is unsafe.

Also remember that the bridge or culvert may hold the weight of one loaded vehicle, but not two.

31. HALTING AND PARKING.—*a. Avoid halting or parking in dangerous places.*—How many times have you come around a curve or a corner and had occasion to remark "That's a fool place to park." Parking in the wrong place always creates an accident hazard.

Here are some examples of "fool" places to park:

Blocking a main highway.

On curves.

On narrow roads.

On bridges.

In defiles.

Near crests of hills (any place on a hill is none too good for parking).

At intersections.

At road junctions.

Blocking driveways.

The place to park safely and conveniently is well to the right side of the road—off the pavement if possible, where oncoming drivers can see you and have plenty of room to pass—or in a field or vehicle park.

Sometimes mechanical trouble, ground or road conditions, or other reasons, make it necessary to halt in a dangerous place. In such cases, place guards, flags or other available signals so that all who approach will have ample warning. Flares or other lights, if available, should be used at night except in a blackout. Move the vehicle to a safe place as soon as practicable.

b. In vehicle park.—Whenever your vehicle is in a vehicle park with others be sure that driving lanes are kept open so that any driver can easily move his vehicle without the need

CURVES ON THE ROAD ARE DANGEROUS, TOO.

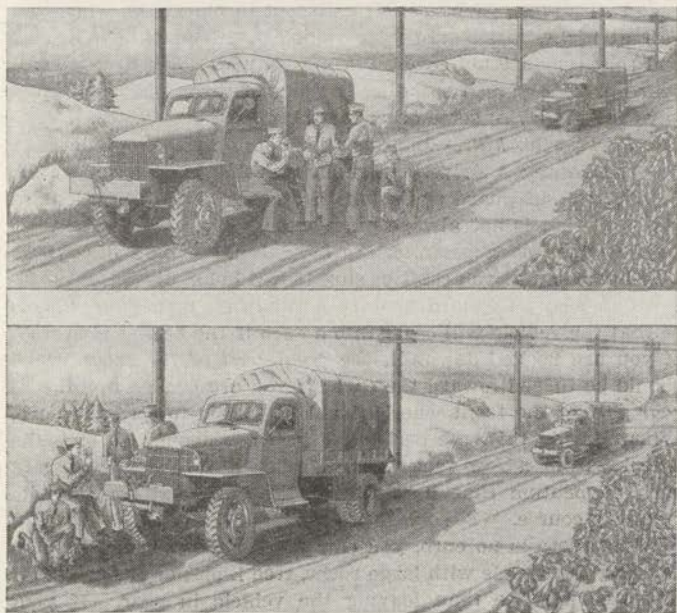


FIGURE 12.—Parking on the highway—Which is the sensible way?

for moving any others. Watch this especially when you have a trailer.

c. Safety of personnel when halted or parked.—To be safe from being struck by passing vehicles, you and any others over whom you have control should keep off the road, to the right. (See fig. 12.)

When changing tires or working on your vehicle, be sure that you are in a safe place, if possible, clear of all traffic.

SLOW DOWN.

d. Tail light must be visible.—Except in blackouts, when you halt at night, make sure your vehicle's tail lamps are lighted and that they are not covered in any way—as by a dropped tail board or by a person standing in front of them. If your lights have failed, devise some other warning.

e. Parking on hills.—Improper parking on hills is dangerous. Possible result: A driverless, runaway vehicle and a bad crash.

One sure safeguard against such crashes is not to park on a hill—but that is not always practicable.

Of course, *when parking, the hand brake should always be set*—but on a hill you can't be sure it will hold.

As an easy safeguard against a runaway, turn your wheels so that the vehicle will coast into a curb if the brakes give way. If you are headed downhill, the *front part* of the front wheel should be turned toward the curb; if you are headed uphill, the *rear part* of the front wheel should be turned toward the curb. When you do this, the curb must be close enough to stop the wheel within a few inches. Otherwise the vehicle may gain such momentum that it will jump the curb and continue its runaway course. (See fig. 13.)

When there is no curb, you can guard against a runaway by blocking the wheels with large rocks, tree limbs, or chocks. This is better practice than leaving the vehicle in gear. If your vehicle is bumped while in gear it is more likely to be damaged.

Sometimes where the road is sufficiently wide, or where there is suitable parking space along the roadside, you can protect the vehicle by parking it at right angle to the grade. Such practice, however, is not suitable on steep grades; it throws the load and the vehicle off balance and it may strain or even upset it.

When you cannot take any of the above precautions, the only safe course is to remain in the vehicle. It is *not* safe to rely on your hand brake to hold an unattended vehicle on a hill.

32. ANIMALS, even the smartest ones, would be considered

HAND CRANK WITH THUMB AND FINGERS ON SAME

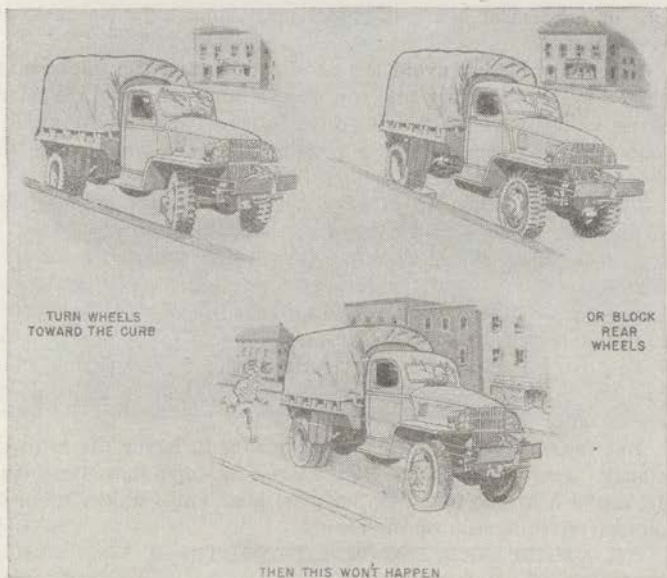


FIGURE 13.—Parking on a hill.

morons if they were human beings. You can't count on their not running in front of you, and you can't count on their getting out of the way.

Many a driver has gone into the ditch or hit a pole trying to avoid running over some animal.

Naturally you don't want to run over and kill any animal, but remember that human lives (including your own) are more valuable than those of animals. If you are forced to choose between hitting a small animal and risking human lives, then hit the animal. However, don't tackle too big a beast. Hitting a

SIDE OF HANDLE.

cow or a horse or a hog may seriously damage your vehicle or even upset it.

You can probably avoid the need for making the unpleasant choice by using care when you suspect that animals are near. Some states have no fencing laws and cattle may be almost anywhere. In others, "cattle pass" signs warn you that cattle may cross the road at that point. Slow down.

33. FOGS.—When it is very foggy, airplanes stop flying, steamships proceed at very low speed and constantly sound a fog horn. Fogs are dangerous because they keep us from seeing. They are particularly dangerous at night. With your headlights on, the little droplets of water that constitute a fog reflect the light back into your eyes.

You can reduce the dazzling reflection of fog by tilting your headlights down and opening your windshield, or by using parking or other dimmer lights when available.

But the only way to be reasonably safe in heavy fog is to go slowly. Just creep along. Be prepared to stop almost instantly. In heavy daylight fogs turn on your headlamps unless there is danger of being seen by the enemy.

34. NIGHT DRIVING WITH LIGHTS.—*a. Night driving is dangerous.*—Night driving is much more dangerous than driving in daylight, largely because even the best headlamps do not enable you to see as clearly and as far as you can in daylight.

b. Avoid "Overdriving your headlights."—At night, on roads without street lamps, you rely on your headlamps. If you can stop within the distance that you can see ahead, all is well. If, however, you CANNOT stop within the distance that you can see ahead, it means that you are "driving blind." Sooner or later there WILL be something hidden in that blackness ahead, and since you cannot stop within the distance remaining after you see it, a crash is practically certain. (See fig. 14.)

Therefore, when driving at night, go slowly. Be sure you are not "overdriving your headlights." Be sure you can stop within



FIGURE 14.—Beyond your headlight beam—what?

the distance that you can see. You will then have a good chance of avoiding the otherwise eventual crash. Don't drive "blind."

c. Headlight glare.—The pupils of your eyes open wider in the dark, in an effort to get more light so you can see better. When the light gets brighter, the pupils contract in an effort to avoid getting too much light. But this is not an instantaneous operation. You will realize this if you recall that when you first enter a darkened movie theater from the daylight you have a hard time seeing. At first, it seems very dark, but in a few moments you find you can see well. Later, when you come out into bright sunlight, your eyes are dazzled until they have become accustomed to the light.

It takes your eyes quite a while to adjust themselves to sudden changes in light intensity.

Hence, when you are driving along in comparative darkness and a car with bright headlights approaches in the opposite

WILL SAVE A TON OF WRECKAGE.

direction, your vision is somewhat impaired, even when the oncoming driver uses his passing beam. When the glare is severe, you may even have an instant of total blindness. After the other car has passed, the impairment continues because your eyes, which have partly adjusted themselves to the light, take time to readjust themselves to the dark.

Tests indicate that the impairment of your vision lasts from 4 to 8 seconds after the other vehicle passes, and that is plenty long enough to hit a pedestrian or anything else that is in the way.

d. Reducing glare danger.—You can reduce the danger of accident from glare in the following ways:

Use your own passing beam whenever you approach a car coming from the opposite direction. Do this as soon as you think your beam is in the other fellow's eyes. Don't wait until he is on top of you. When driving on well-lighted city streets, always use the passing beam.

If necessary, signal the other fellow to do likewise by flicking your lights (alternating the beams rapidly).

Keep your windshield very clean.

As the other fellow approaches, do not look at his headlights. Rather look at the right lane of the road, and drive where you are looking. By not looking at his headlights, your eyes get less glare and have less adjusting to do.

And above all, knowing that you can't see as far at night, reduces your speed.

e. Road conditions.—Another reason for driving slowly at night is the fact that, even with your headlights, it is difficult to judge road conditions. If a shadow looks like a hole or an obstruction, it can't hurt you, but if a hole or an obstruction looks like a shadow, it may be "just too bad."

35. HAND CRANKING.—Be sure the transmission is in neutral and the hand brake securely set before you hand crank your engine. Then the vehicle won't run over you when the engine starts.

NEVER OVERDRIVE YOUR BRAKES.

Hold the crank securely. If it slips out of your hand, it may swing around and break your arm.

Keep your thumb and fingers together—not on opposite sides of the crank handle—so that the hand won't be injured if the crank kicks back.

Make sure there is room to swing the handle without knocking or cutting your hand.

SECTION II

DRIVING SOLO

36. GENERAL.—This section contains certain good driving practices which apply especially when you are driving solo, that is, not in a motor column.

However, they are all sound, common sense measures. For your own protection, therefore, you should also apply them even when you *are* driving in a motor column, unless they conflict with the column operation or the orders of the column commander and his assistant.

37. FINDING YOUR WAY.—If you expect to “get there” safely when driving solo, of course you will have to know where “there” is, and what kind of roads or cross country routes you will have to follow. This means that you should be familiar with how locations are found on an Army map and familiar with some of the commonly used map symbols.

a. “*Read Right Up.*”—You can easily locate any point on an Army map from a simple, numbered designation if you understand the grid. The grid is formed by ruling off the map with numbered north-and-south lines and numbered east-and-west lines. (See fig. 15.) The point where these lines cross is known by the numbers of the two lines, reading first to the *right* and then *up*. “*Read right up.*” As you can see, point 2-1 is at the point where line 2 (reading to the *right*) and line 1 (reading *up*) cross.

DON'T ARGUE WITH A TRAIN.

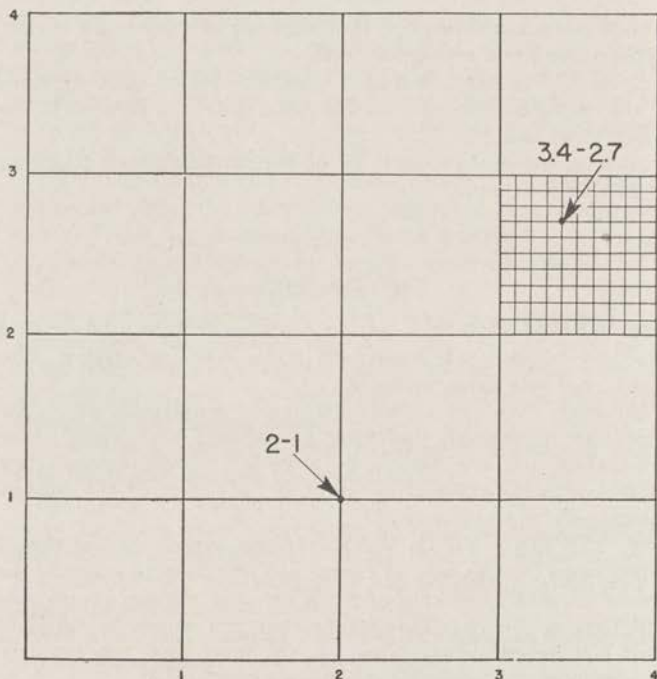


FIGURE 15.—Locating a point on a grid.

Actually, you will very seldom be looking for a point that falls exactly at the crossing of two of these lines. Instead of being told to drive to location 2-2, you may be directed to 3.4-2.7. This is just as easy to find. Again, "read right up." The only difference is that you now locate line 3 (reading to the right), and continue to a point four-tenths of the way from there to line 4. Then locate line 2 (reading up), and

DON'T RIDE THE CLUTCH.

continue to a point seven-tenths of the way to line 3. The location is shown in figure 15. Although you won't find the tenths marked on a real grid map, you can easily space them off for yourself.

b. Estimating the distance.—Maps are drawn to scale, so that by measuring the distance on the map you can estimate the distance on the ground. This scale may be indicated by a simple note such as "3 inches equals 1 mile," which means that 3 inches on the map is equal to 1 mile on the ground. You can then use a 3-inch strip of paper as a ruler to measure the number of miles on the map. Sometimes, instead of such a note, a ruler is printed on the map for you. Another method

of showing the scale is by a fraction, for instance: $\frac{1}{63,360}$, or 1:63,360. Either of these fractions tells you that 1 unit of distance on the map is equal to 63,360 on the ground—for instance, 1 inch on the map is equal to 63,360 inches on the ground, which is equal to 5,280 feet or 1 mile.

c. Strip maps, which show only the route you are to drive do not have grids, and may not have scales.

d. Map symbols.—Army maps are marked with a standardized set of symbols which will help you find your way. They tell you the kind of road, show bridges, fords, ferries, and railroad crossings; and give you the locations of landmarks, in addition to much other useful information. Study the symbols shown in figure 16, so that you will recognize them on a map.


e. Know the country in which you are operating.—When you are stationed at an unfamiliar location, make it a point to become acquainted with the landmarks and geographical features of that area. This will greatly aid you in using maps or in operating without maps.

38. "RULES OF THE ROAD" have been gradually built up because it has been found that they are not only the safer ways but also the more convenient. Some rules of the road are pre-

ROADS

PRIMARY	
HARD SURFACE	
IMPROVED SURFACE	
SECONDARY	
RAILROAD	

CROSSINGS

BRIDGE (CAPACITY MARKED)	
FERRY	
FORD	
RAILROAD	

LANDMARKS


		
BUILDINGS	CHURCH	HOSPITAL
		
CEMETERY	SCHOOL	

FIGURE 16.—Map symbols commonly used.

scribed by law. Others are simply courtesy, good manners, and common sense. Any driver who does not know and comply with the rules of the road not only endangers himself and others—he also betrays himself as an inferior driver, as “green,” ignorant, or lacking in common sense. Some of the rules of the road are given in paragraphs 39 to 52, inclusive.

39. KEEP TO THE RIGHT.—When driving on a two-lane road, stay on the right half except when necessary to drive to the left while passing slower-moving or parked vehicles. On a road with more than two lanes, keep in the right lane all the time except when passing or preparing to make a left turn. Do not drive on the left half of the road, even for passing, if the highway has four lanes or more. The only exceptions to these rules are—

- a. When there is heavy traffic so that there are two or more

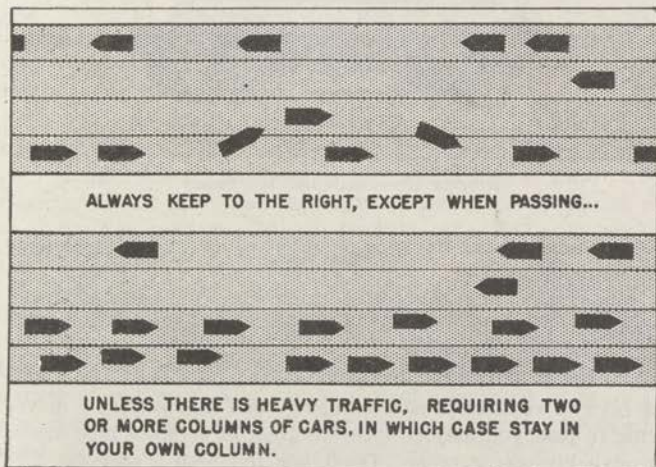


FIGURE 17.—Keep to the right.

YOUR HORN WORKS—TRY YOUR BRAKES.

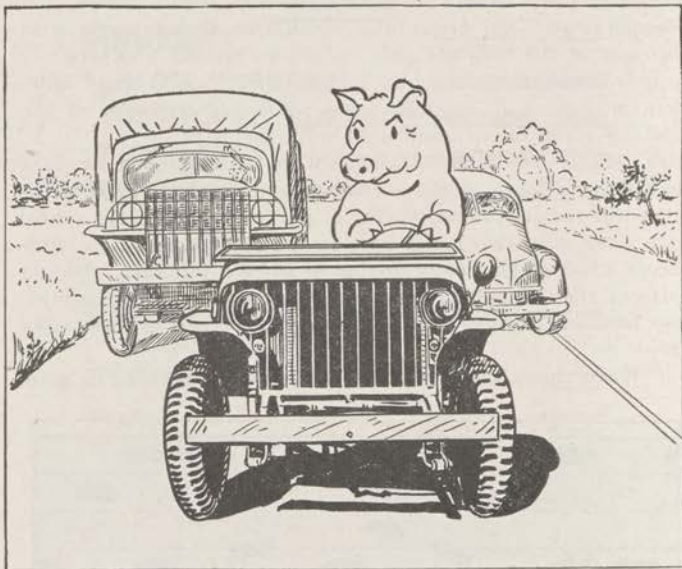


FIGURE 18.—Don't hog the road.

steady columns going the same way (in which case, stay in your own column).

b. When there is an almost continuous column of cars parked in the right lane (in which case you must, of course, run to their left). (See fig. 17.)

40. DON'T HOG THE ROAD.—Sometimes a road is too narrow for two vehicles to pass easily. When this is true, a driver trying to pass you may go into the ditch or strike a pole unless you give him extra room. Don't hog the road. (See fig. 18.) If a man from the front approaches, or a man from the rear

HEED THAT HOWL.

signals to pass, *pull over*, and if necessary, *stop*. Do more than let him pass—let him pass safely. Let him get back in column.

41. LEFT TURNS.—When making a left turn, do not “cut the corner.” Insofar as you can, keep to the right of an imaginary pole at the center of the intersection, unless local traffic rules or conditions make it clearly desirable to drive to the left of the center. (See fig. 19.) When there are two columns of traffic, carefully maneuver into the left column before making your turn.

42. RIGHT-OF-WAY.—“Here lies the body of Jonathan Hay, who died defending his right-of-way.” If you want to be sure of avoiding Jonathan's fate, give the right-of-way to anyone who wants it. Remember that the other fellow may not know the rules of right-of-way, or he may be one of those who try to bluff their way through, right or no right, or a driver from a State or country which has different rules and customs, or just “asleep at the switch.” A collision is no fun, even when you have the right-of-way. The one safe rule is to keep your vehicle in control and be ready to stop, no matter who has the right-of-way technically.

The rules for the right-of-way make driving safe only by telling you when to **GIVE** right-of-way to others. They increase your danger if they cause you to **TAKE** right-of-way. Even though you are sure that the right-of-way is yours, that is not enough. You must also be sure that the other fellow knows it's yours—and that he acts accordingly.


Traffic regulations in the United States are more nearly uniform than they used to be, but they still are not entirely uniform. In foreign countries they vary greatly. Generally, however, you will find that the following practices lessen the danger of collision. You will find them illustrated in figure 20.

a. Give the right-of-way to all vehicles approaching from your right.

EASY ON BRAKES WHEN ROADS ARE SLIPPERY.

LEFT TURN

IN SOME LOCALITIES



YOU KEEP TO THE RIGHT OF THE CENTER TO AVOID CARS TURNING RIGHT FROM THE OTHER STREET. IF YOU HAVE NO OTHER INSTRUCTIONS, DO IT THIS WAY.

IN OTHER LOCALITIES



YOU KEEP TO THE LEFT OF THE CENTER TO AVOID CARS MAKING LEFT TURN FROM OPPOSITE DIRECTION.

BUT NEVER




NEVER "CUT THE CORNER" OR STOP SO THAT YOU RISK COLLISION WITH A VEHICLE MAKING A RIGHT HAND TURN.

KNOW THE LOCAL LAWS

FIGURE 19.—Making a left turn.

GIVE THE RIGHT OF WAY

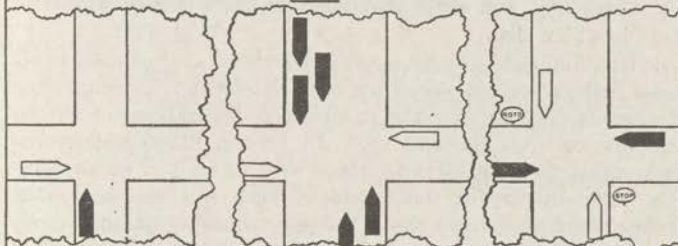
(VEHICLES SHOWN IN SOLID BLACK SHOULD BE GIVEN RIGHT OF WAY.)



GIVE RIGHT OF WAY TO ALL VEHICLES COMING FROM YOUR RIGHT.

GIVE RIGHT OF WAY TO ALL VEHICLES ON A MAIN HIGHWAY OR BOULEVARD.

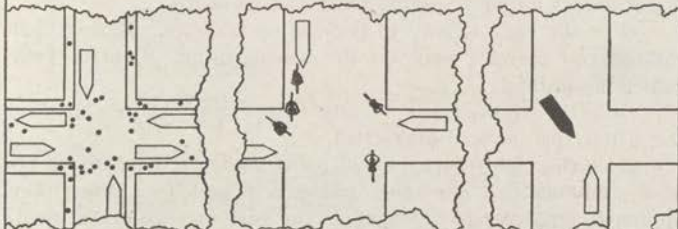GIVE RIGHT OF WAY WHENEVER YOU FACE A RED LIGHT OR STOP SIGN.



GIVE RIGHT OF WAY TO ALL PEDESTRIANS, EVERYWHERE, ALL THE TIME, UNTIL YOU ARE SURE THEY HAVE GIVEN IT TO YOU.

GIVE RIGHT OF WAY TO ALL BICYCLISTS EVERYWHERE, AT ALL TIMES, UNTIL YOU ARE SURE THEY HAVE GIVEN IT TO YOU.

GIVE RIGHT OF WAY TO ANY VEHICLE MAKING OR SIGNALING FOR A LEFT TURN.

GIVE RIGHT OF WAY TO ALL FIRE, POLICE, AND OTHER EMERGENCY VEHICLES.

OBSERVE AND OBEY ALL DIRECTIONS OF TRAFFIC SIGNS, LIGHTS, OR MILITARY OR CIVIL POLICE.

GIVE RIGHT OF WAY TO ALL FOOLS WHO TRY TO TAKE IT EVEN WHEN THEY ARE WRONG.

FIGURE 20.

b. *Give* the right-of-way to all vehicles on a main highway or boulevard which you are crossing or entering (no matter whether they come from the right or the left).

c. Come to a full stop; and give the right-of-way wherever there is a stop sign.

d. *Give* the right-of-way to all pedestrians, everywhere, at all times, unless you are *sure* they have extended it to you. Give it whether they are crossing at intersections, walking along the highway, or even "jaywalking." In 1 year, 12,500 pedestrians were killed, and 260,000 pedestrians were injured by motor vehicles. The drivers of those vehicles each felt the same sick feeling when his vehicle struck the pedestrian—no matter whose fault it was.

Be a sport. When a light changes, give pedestrians a chance to get across without scaring them half to death.

e. *Give* the right-of-way to persons on bicycles. Expect that children on bicycles may do the wrong thing. Control your vehicle accordingly.

f. *Give* the right-of-way to any driver making, or signaling for, a left turn at an intersection.

g. *Give* the right-of-way to all police and fire department vehicles, ambulances, and other emergency vehicles. When they approach, pull over to the right, to the curb or edge of the road, if possible, clear of any intersections, and stop until they have passed. Sometimes in heavy traffic you cannot do this. If so, comply as nearly as you can.

h. *Give* all rights-of-way indicated by signs, traffic lights, or signals from individuals.

i. *Give* the right-of-way to a driver who is endeavoring to pass you from behind and when he is trying to get back into column.

j. *Give* the right-of-way to every driver who has not shown clear signs of giving it to you. In brief, to be safe, remember this rule: "*The other fellow* always has the right-of-way."

AFTER THE WRECK COMES THE RECKONING.

k. Military or civil police have the authority to modify the rules of right-of-way for special reasons. Obey their signals.

43. **OBEY TRAFFIC DIRECTIONS**, which are given in various ways. The most general are—

a. *Traffic lights.*

Red.....	"Stop."
Yellow.....	"Caution—Prepare to stop."
Green.....	"Go ahead with care."
Flashing red or yellow.....	"Stop, look, and proceed with care."

b. *Traffic police*, who signal or tell you what to do.

c. *Signs*, giving directions or information, such as—

Keep right.
Slow.
Stop.
RR crossing.
No parking.
One way traffic.
School.
Dangerous hill—Trucks go in low gear.
Speed limit 25 miles.

Often this information is shown in simple diagrams, such as arrows or cross marks, like those shown in figure 21, which indicate dangerous curves or intersections. In some states these symbols are marked with the highest safe speed for that curve or intersection. In most states, the *shape* of the sign has a meaning, as shown in figure 21. Learn to read the road.

Such directions have been provided by authorities who know the conditions you face, to warn you against some danger. Take their word for it. Observe and comply with *all* such directions.

YOU CAN MAKE THE HIGHWAYS SAFER.

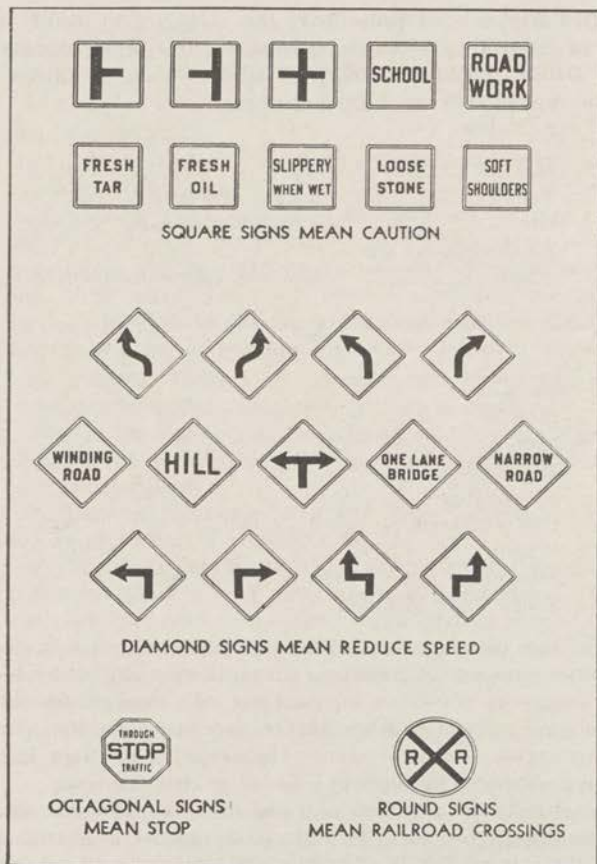


FIGURE 21.—Read the road.

44. CROSSING RAILROAD TRACKS.—Locomotives have little respect for your right-of-way. More than three thousand motor vehicles were wrecked by locomotives in a single year. And the locomotive is likely to do a thorough job on you as well as your vehicle.

To avoid these severe accidents, always **STOP, LOOK, AND LISTEN** at a railroad crossing not protected by a watchman or an automatic signal.

But do not rely too much on gates, crossing watchmen, or signals. It's your life. Take care of it yourself.

Wait until the vehicle ahead has cleared the track by the full length of your vehicle before you drive on the track. Otherwise, if the vehicle ahead should stop or stall, you may find yourself on the tracks, unable to move, and out of luck.

When you have been waiting for a train to pass, and it has finally done so, be sure that there is not another train coming on another track before you try to cross.

45. SPEED INCREASES DANGER IN FOUR WAYS.—One quarter of all fatal motor vehicle accidents in the United States involve excessive speed by one or more drivers. (See fig. 22.) High speed increases danger in four ways:

- a. High speed makes it more difficult to stop in an emergency.
 - b. High speed makes it harder to take a curve, or to change direction to avoid collision.
 - c. High speed causes vehicles to approach each other more rapidly, and gives both drivers less time to act.
 - d. High speed makes the impact of collision more severe.
- Speed limits are intended to reduce these hazards.

Army men have two sets of speed regulations: those imposed by military authority (including the maximum speeds prescribed for your vehicle and listed on the caution plate); and those imposed by civil law, with which the Army cooperates. You should therefore know the motor vehicle laws of the states

DON'T CHARGE—IT'S NOT A TANK.

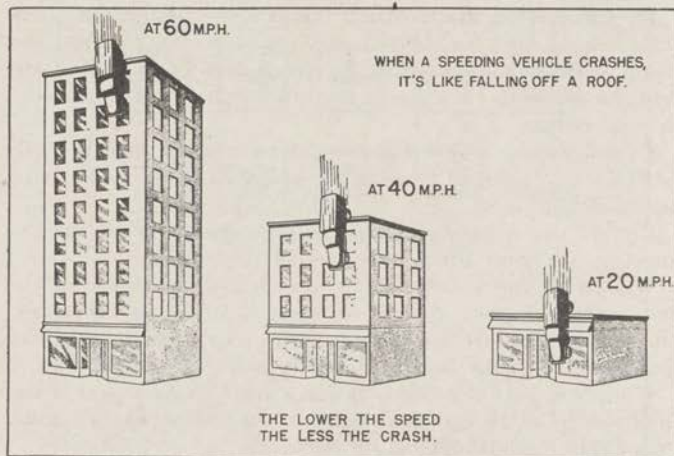


FIGURE 22.

in which you operate, and obey the speed limits of those states, as well as the speed limits of the Army. Thus you will avoid penalties as well as accidents.

Slow down at night, or on bad or slippery roads, at intersections, at curves, in fog, in heavy traffic, and at any other time or place which speed makes more dangerous.

46. FOLLOWING OTHER VEHICLES.—The vehicle ahead of you may have better brakes than yours. The driver may not signal. To avoid the danger of ramming him, keep a safe distance behind. A good way of estimating this is the general rule suggested for driving in column (see par. 60).

47. PASSING STANDING VEHICLES.—When you pass a parked vehicle, there are two dangers to watch for. First, the vehicle obstructs your vision. A pedestrian, particularly a child,

BE SMART—BE CAREFUL.

may step from behind it directly into your path. Second, it may suddenly pull from the curb into your path with insufficient warning.

There isn't much you can do about these dangers except to keep alert, so be sure to do that. *Expect* a standing vehicle to pull out suddenly. *Expect* a child to run or a pedestrian to walk from behind parked vehicles. Drive slowly enough that if these things happen, you can stop in time.

48. SCHOOL BUSES.—When a school bus stops, you too should always come to a full stop. On a narrow (two-lane) road, stop even though the bus is headed in the opposite direction. Do not move on again until (1) the school bus moves on, or (2) you get a signal to continue from the school bus driver or police. If you pass a standing bus, proceed very slowly until you have cleared it. *Don't kill a child.*

49. HORN BLOWING.—When you hear a "horn-tooting" driver, you can be pretty sure that he is an inexperienced driver. Good drivers don't use their horns for driving—they use their brakes. A sudden blast of your horn may startle another person and make him lose his head so that he does the wrong thing; you thereby cause an accident. Don't try to scare people out of your way with your horn. Use your horn only when you need it for a warning.

50. HOLD THAT WHEEL.—Even on a good straight road you may strike a stone or a break in the pavement that suddenly deflects your front wheels, so hold that steering wheel with a firm but relaxed grip. Keep it in your control. USE both hands.

51. CROSSWALKS.—Keep clear of crosswalks when you halt at an intersection, so that you do not obstruct pedestrians' right-of-way. (See fig. 23.) Blocking their way is chiseling—and worse, because they may be injured by vehicles they cannot see if they have to dart around your vehicle.

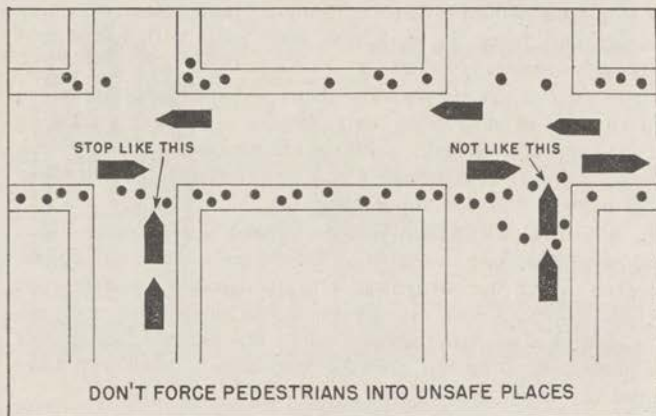


FIGURE 23.—Keep crossings clear.

52. FIRE HYDRANTS.—Firemen must act quickly to prevent a blaze from getting out of control. So don't delay them. Park at least 15 feet away from the nearest fire plug.

SECTION III

DRIVING IN A MOTOR MARCH COLUMN

53. CONTROL BY THE COLUMN COMMANDER.—When you are driving in a march column, your column commander controls your speed, the distance between vehicles, routes, traffic precautions and other details, with the assistance of his officers and noncommissioned officers.

54. YOUR RESPONSIBILITY IN A MARCH COLUMN.—Even though you are driving in a military march column, you, the driver, are still responsible for the safe operation of your own vehicle. The fact that you are part of a column does not

THE GEAR THAT TAKES YOU UP EASILY

lessen the need for you to be alert and careful. When driving a single vehicle, you control your own speed and direction. In a march column, *you are expected to maintain your place and still avoid accidents. Your responsibilities are not lessened—they are increased.*

55. THE COLUMN COMMANDER WANTS SAFE OPERATION.—The column commander expects you to do everything that is necessary for the safety of your vehicle and its passengers or cargo. He wants you to maintain your position in column, but he expects you to realize that a slight delay is better than a crash and an indefinitely long delay.

Normally the orders of the column commander are designed to help you maintain your place safely in column, avoiding accidents, damage, and bodily injuries. Only when the military situation makes it imperative, will the column commander require you to assume risks.

56. OBSERVE GENERAL SAFETY PRECAUTIONS.—Most safety precautions apply equally well whether you are driving in a march column or not. While in column, the speeds, distances, and details may be regulated by a higher authority. But other responsibilities remain yours as a driver. For example, you still carry out your preventive maintenance schedules, you still take care to avoid sudden stops, and, perhaps more important than ever, you still give the proper signals.

The best way to avoid accidents in column is to observe carefully every safety precaution which does not conflict with the orders of the column commander.

You will be able to drive more safely in column if you understand the general precautions usually taken, as well as your own responsibilities. Paragraphs 57 to 61, inclusive, will give you an idea of some important points in safe march column operations.

57. RIGHT-OF-WAY OF A SMALL MOTOR MARCH COLUMN.—Except in special military necessity, each vehicle of

WILL TAKE YOU DOWN SAFELY.

WILL TAKE YOU DOWN SAFELY

a small motor march column extends the same right-of-way as individual vehicles, unless the column is accompanied by a police escort to block off traffic.

58. RIGHT-OF-WAY OF A LARGE MOTOR MARCH COLUMN.—Large march columns running on a march order schedule might be frequently split and their schedule disrupted if they observed all the customary practices as to right-of-way, traffic signal lights, etc. To keep intact and on time, a large motor column must proceed steadily, without unscheduled interruptions.

a. Area control.—One of the best ways of preventing intersection collisions with motor columns lies in area control. Under this plan the route and time schedule is furnished to civil or military police authorities in a given area, who arrange to divert or block off cross traffic. This may be done from a distance of several blocks off the motor march route if the convoy is large. It may otherwise be done by stationing police at intersections or by arranging for the column to have green traffic lights throughout the area, or both. This is in addition to any accompanying police escorts. The area control police do not accompany the column, but remain at their posts like ordinary civil traffic police.

Obviously this method is workable only in areas where sufficient police, either civil or military, are available.

b. Accompanying police.—Civil or military police on motor-cycles or in small cars, should precede a motor column far enough to clear the road and halt all cross traffic in time to let the head of the column pass safely. One or more police should remain at each intersection until the last vehicle in the convoy has cleared; then they pass at a reasonable speed to the column head, ready to guard the next cross road.

c. Guides (or route markers) and guards, may be dropped from a vehicle which precedes the column. Rear vehicles pick up these guides or guards, and at the first appropriate halt

ACCIDENTS GO UP WHEN THE SUN GOES DOWN.

proceed to the head of the column so that the men may be dropped off again. The vehicles at the head of the column, when empty, halt until the column has passed, so that they can pick the men up. In small convoys, these men rejoin their proper vehicles by foot at the first halt that allows them time to transfer.

d. Closing up in cities.—In cities and elsewhere in heavy traffic where speed is reduced, it is safe for vehicles to run closer together, presenting to cross traffic an almost solid column. Under such conditions it is almost impossible for a civilian motorist not to realize that a military motor column is crossing an intersection. This materially reduces the danger of collisions. However, if the close distances are not maintained, a civilian may get the impression that the column has passed, when it is only interrupted. He may then attempt to cross, and crash into the vehicle which lagged. Hence, when close distance is adopted as a safety precaution, the prescribed distances must be rigidly maintained.

Close distances are not safe when the column runs at higher speeds, because sudden slowing or stopping may cause the vehicles to pile up.

e. When no orders have been issued as to right-of-way.—In a motor march column, in the absence of orders to the contrary from the column commander, you must—

- (1) Obey all local, State, or military traffic regulations, traffic signs, and signals.
- (2) Drive through a signal-light-controlled intersection only under the following conditions:
 - (a) When light is green.
 - (b) When light is flashing or fixed yellow.
 - (c) When a guard (or civil or military police), who is controlling or regulating traffic at the intersection, signals all clear.
 - (d) When light is not operating.

BE CAREFUL AFTER DARK.

(3) At all times operate at such a speed and in such a manner that you have proper control over your vehicle.

f. Railroad crossings.—Police or military guards should be stationed at all railroad crossings while a motor column is passing over the tracks. Their duty is to halt the column in plenty of time if a train is approaching.

But these precautions do not relieve you, as a driver, of the responsibility for making sure that all is clear before you cross railroad tracks.

59. FASTER-MOVING VEHICLES.—When an "outside" vehicle not under control of the column commander breaks into the column, it may lag behind the vehicle it is following and cause vehicles in the column to lose distance. This will produce the undesirable "accordion" effect in which the length and spacing of the column is constantly changing. It increases danger of accident.

When the highway is wide enough and the police escort is sufficient, this danger may be prevented by keeping the column in the right lane, and compelling all other vehicles to keep out of it.

However, in military operations there are usually many military vehicles, such as staff officers' cars or motorcycles, which must proceed in the same direction as the convoy but at greater speed. Frequently there are also civilian vehicles whose drivers are in a hurry. If there are not enough lanes and enough police to keep such vehicles in a different column, you as a driver should permit all such overtaking vehicles to pass freely. Keep well to the right. Give them plenty of room to pass you and to fall in ahead of you in the column if necessary. An overtaking vehicle which cannot get back in column, or is delayed in getting back, may side-swipe you or collide head-on with a vehicle coming in the opposite direction.

60. SAFE DISTANCES IN COLUMN are determined by road and weather conditions, and by the need for space enough to

NEVER OVERDRIVE YOUR LIGHTS AT NIGHT.

stop without rear-end collisions, and to let faster-moving vehicles pull into the column after passing.

If you have no other orders you will find that it is a good general rule to keep, as nearly as you can, a distance in yards which is twice the rate of speed at which you are driving. If you are running at 25 miles per hour, leave 50 yards' distance between your vehicle and the one just ahead. For a 30-mile speed allow 60 yards; for 35 miles, 70 yards, etc. Remember this is *yards, not feet*.

But do you know what 50 or 60 or 70 yards looks like? To avoid accidents you must not only know what distances are prescribed, but also be able to judge these distances.

You can accomplish this more easily if you will practice estimating distance now and then. Take some known distance, like the length of a truck or the distance between telegraph poles, and observe carefully how that distance looks to you. Try this in different lights, day, night, dusk, etc., and you will soon be a good estimator of distance. This ability helps in many ways in the Army.

61. **SIGNALS** recommended for motor march use are—

ATTENTION

Extend arm full length above the head, palm to front, and move it a few inches slowly from side to side several times.

START ENGINES

Simulate cranking by describing circles in front of body with right arm, fist closed.

READY TO START

Face leader, and extend arm vertically, fingers extended and joined, palm toward the leader.

FORWARD MARCH

Raise arm vertically, palm to front and lower it to horizontal position in direction of march.

STOP ENGINES

Cross arms in front of body at waist and move them sharply to sides. Repeat several times.

DECREASE SPEED

Extend left arm at side at an angle of 45 degrees below the horizontal.

ASSEMBLE

Extend arm vertically, palm front, fingers extended and joined, and move it to describe large horizontal circles slowly about the head.

REPORT WHEN READY TO START

Extend arm vertically, fingers extended and joined.

INCREASE SPEED

Carry closed fist to shoulder and thrust it upward several times to full extent of arm.

MOUNT

Extend arm horizontally at side, palm up, and wave it upward several times.

DISMOUNT

Extend arm horizontally at side, palm down, and wave it downward.

THE OTHER FELLOW ALWAYS HAS THE RIGHT OF WAY.



FIGURE 24.

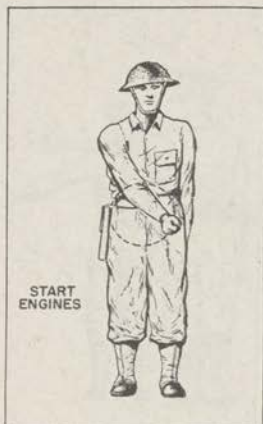


FIGURE 25.



FIGURE 26.



FIGURE 27.



FIGURE 28.

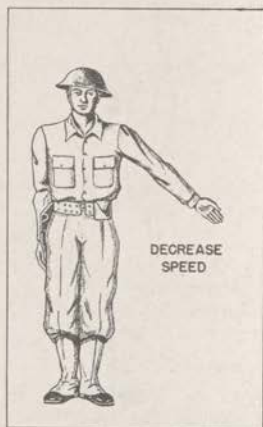


FIGURE 29.



FIGURE 30.



FIGURE 31.



FIGURE 32.

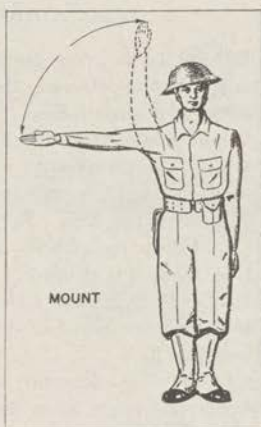


FIGURE 33.



FIGURE 34.



FIGURE 35.

INVERTED COPY

TURN AROUND SIMULTANEOUSLY

Extend both arms horizontally toward drivers and describe small vertical circles, then signal "Forward March" in the desired new direction.

When given from the cab of a vehicle, the signal to turn around simultaneously is this: Extend arm downward at a 45-degree angle, palm toward the front, and describe small circles with the arm. See figure 36.

The following signals are uniform, whether given from the cab or from the ground:

PASS AND KEEP GOING: Extend left arm horizontally at side and move hand to describe small circles toward the front. See figure 37.

CLOSE UP: Extend left arm horizontally at side, palm toward the front, and describe a 2-foot circle. See figure 38.

OPEN UP: Extend left arm horizontally at side, palm toward the front, and describe a 90-degree arc downward several times. See figure 39.

IMMEDIATE DANGER (AIR OR MECHANIZED ATTACK): Use three long blasts of a whistle, vehicle horn, siren, or klaxon, repeated several times; or three equally spaced shots with rifle, carbine, or pistol; or three short bursts of fire from machine or submachine gun. In daylight, point in the direction of the impending danger; at night, supplement the alarm by voice warning to indicate the direction of danger.

Whenever a march column is halted on a curve, on the downgrade of a hill, or wherever some drivers cannot see the signals, signals may be relayed along the column or transmitted by messengers to all concerned.

In addition to these, you should also learn all signals authorized in the manuals of your arm of service. Any such signals not in conflict with the above, may be adapted for use in motor marches.

STOP, LOOK, AND LISTEN.



FIGURE 36.

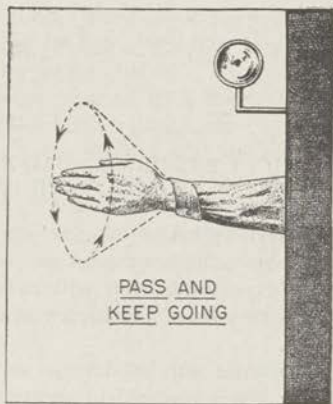


FIGURE 37.




FIGURE 38.

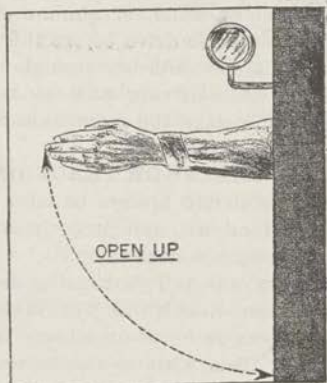


FIGURE 39.

CHAPTER 4

DIFFICULT TERRAIN: BAD ROADS AND CROSS COUNTRY DRIVING

62. **GENERAL.**—Almost all drivers sometimes have to use bad roads or drive on snow and ice. But you, as a soldier-driver, must expect that you will have to drive on bad roads much more often than a civilian and drive cross country on no roads at all.

The chief aids to driving on difficult terrain are low gears which give your vehicle great pulling ability, front axle drive, traction devices, chains, winches, snatch blocks, and ropes.

63. **FRONT-AXLE DRIVE.**—Usually you will need the driving power of all axles to cross plowed fields, stretches of mud, deep snow, sand, or similar difficult terrain. Always engage the front-axle drive *before* the vehicle leaves hard surface road to go across difficult ground. If you let your vehicle become stuck while driving with the rear wheels only, it is usually too late to engage the front axle drive and you may be unable to pull out without aid.

64. **CHAINS OR TRACTION DEVICES** as supplied for your vehicle should always be with it. Keep them clean, oiled and free from rust, and properly adjusted, ready for immediate use whenever you need them.

Always install your chains or traction device before you enter the ground on which you think you will need them. But don't put them on too soon or keep them on when the need has passed. Using them without reason wears them and may also damage roads.

a. *Chains.*—You will find chains helpful in mud, sand, snow,

MITCHELL LIBRARY

or slush. They have little, if any, value in preventing a sideslip on an icy, or hard and slippery road. They do little good when operating over ice which is so hard that they will not "bite" it.

Here are some general rules for using chains:

Install your chains right side out, that is, with the open ends of the cross links out. Inside out they will damage the tires because the insides of the cross links are flat and the outsides are sharp. Adjust your chains loose enough to creep but not loose enough to strike the body of the vehicle or be pulled off. Fairly loose adjustment will make the chains give better traction and will wear the tires less than a tight adjustment.

When you lay the chains out on the ground before running the wheels on them, have the clasps toward the rear. Otherwise, they may loosen and come off.

If you are installing chains on a vehicle with an all-wheel drive, you should put at least one chain on each wheel, single or dual, to prevent unnecessary strain on the driving mechanism.

When you have only one chain for a dual wheel, you should install it on the outside tire.

b. Traction devices, if you have them, are useful for giving your vehicle many of the cross-country abilities of a half-track tractor. Make sure that you know just how to install them.

If you cannot tighten an individual-wheel traction device enough to prevent the wheel from slipping inside it, chain the device to the wheel.

When you apply traction devices on a 6 x 6 truck, it is usually preferable to use an oval-band coupling around the middle and rear wheels rather than individual devices on each of those wheels. This makes your truck a half-track vehicle with exceptionally low ground pressure so it will not sink in easily.

65. WINCHES—USE THE WINCH PROPERLY.—*a. Don't abuse it.*—It takes a lot of experience to understand completely the uses of the winch and the principles of rigging which are involved in its use. If you are not thoroughly familiar with

DON'T KILL A CHILD.

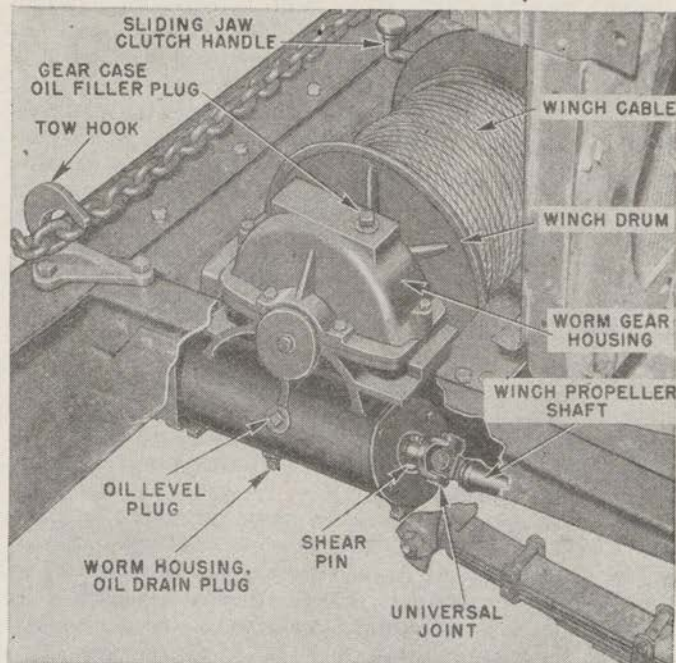


FIGURE 40.—A front-mounted winch.

winch, therefore, it is best for you to depend upon a senior for direction and supervision, except in emergency. A few fundamentals as to winches are given here. Consult the maintenance manual of your vehicle for the details of how to operate and maintain your particular winch.

b. Look out for snapped cables.—When a strong steel cable is tightened it may break, flying back like a whip with force

BE PATIENT AT A RAILROAD CROSSING

enough to kill a man or to cost him his leg. Everybody should therefore stand clear before the winch cable is tightened.

All newer front-mounted winches are provided with shear pins (fig. 40) as a precaution against overloading the winch or snapping the cable. The shear pin is located in the yoke of the universal joint that drives the winch worm-gear shaft. When the winch is overloaded, the shear pin is supposed to break instead of the cable. Never use makeshift pins of unknown strength to replace broken shear pins; if the pin is too strong, the cable may snap and injure somebody. Use only the manufacturer's soft metal pins, made to fit the hole without forcing.

Don't depend on the shear pin for protection. Even with a shear pin, a kinked, frayed, damaged, or weak cable may snap.

Older center-mounted winches have no shear pins. Handle them with great care. Remember that a broken cable whipping through the air can be deadly.

c. Tips on winch operation.—(1) Always depress the clutch pedal of the vehicle (disengage the clutch) before changing gears in the winch power-take-off. Figure 41 shows the positions of the power take-off lever for different winch speeds of one make of truck. *Always consult the winch and power take-off name plate in cab of your particular truck for the correct lever positions*, as these positions vary with different makes of trucks. When the winch is not being used, lock the lever in neutral position with the hinged latch on the floor board.

(2) Do not operate the winch with an engine speed exceeding 1,000 rpm (about $\frac{1}{4}$ throttle).

(3) Use the high speed of the winch for light loads and for reeling in the cable. Use the low speed for heavy loads. The winch can be stopped almost instantly by disengaging the vehicle clutch.

(4) Pay out the cable by disengaging the sliding-jaw clutch, controlled by a lever (fig. 40) and pulling out the cable by hand.

NOT A PATIENT IN THE HOSPITAL.

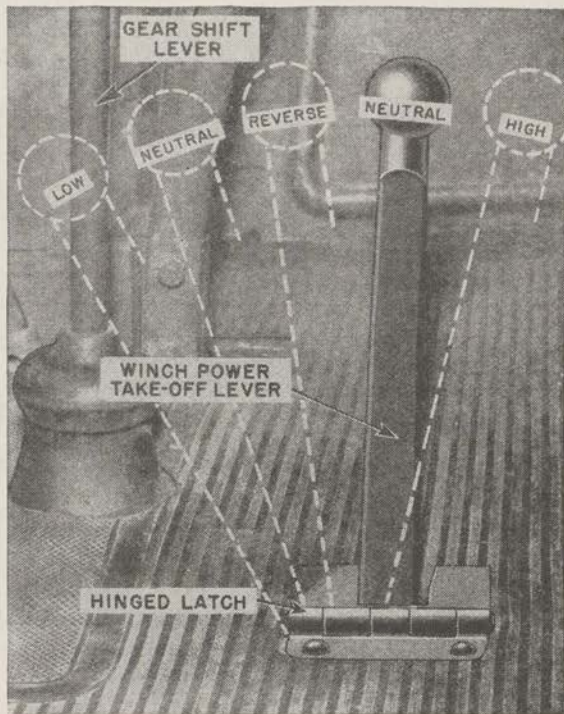


FIGURE 41.—Winch control lever in cab—consult winch and power take-off name plate in your own vehicle for proper speed positions.

Use the reverse gear only for easing the strain on the winch cable or for lowering a load downhill.

(5) *Never race the vehicle engine when winding the winch cable, especially when it has a light load or no load.*

RULES ARE FOR YOUR SAFETY

d. Prevent cable abuse.—Never bend the wire cable at a sharp angle. In taking up slack, straighten out all kinks and twists. Do not tie knots in the cable except for emergency repair. Do not rig the cable around an angle or permit tractors or vehicles with metal tires to run over it. These forms of abuse flatten the cable, expose the manila hemp core, and permit water to enter, causing internal rust and weakening the cable.

Do not wind the cable on the winch drum rapidly or without a load because it may kink.

After using the winch, have one person, or preferably two, pull back on the cable while it is wound slowly and evenly on the drum. Your assistant stows the chain by passing it through the left tow hook and across the bumper and hooking it to the right tow hook. Turn the winch slowly until your assistant signals you that the chain is taut. Stop the winch immediately by depressing the clutch pedal. Then put the power take-off lever in neutral and lock it in place with the hinged latch.

e. Prevent rust.—Keep the winch cable coated with engine crankcase oil, or a heavy viscous oil, to prevent rust.

66. REDUCING STRAIN ON A WINCH RIG.—*a. Anchor the vehicle.*—When using the winch for a difficult pull, hold your vehicle in place by the brakes or wheel blocks, or anchor it to a tree ground anchor or "deadman," usually by the pintle hook.

b. Anchor the cable.—If there is any choice, select an anchor (tree, pole, etc.) that requires a long winch cable and the least possible angle to pull. Attach the winch-cable chain low on the tree, pole, or stake to avoid breaking it off or uprooting it.

c. Use snatch block.—When practicable, do not use your winch for pulling your own vehicle without passing the winch cable through a snatch block secured to the anchor, as shown in figure 42. This rig is much better than attaching the end of the cable directly to the anchor, as the double pull lessens the strain on the cable and eases the jerks. Cable used single for heavy loads is often frayed or broken or otherwise damaged.

OBSERVE THEM.

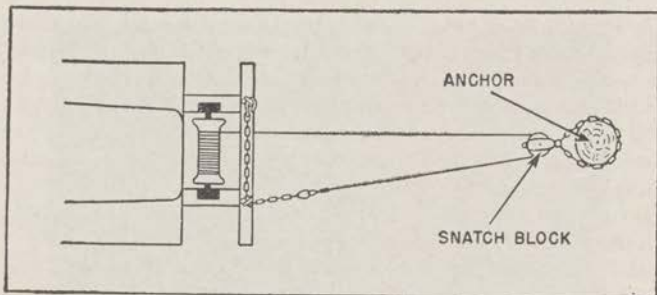


FIGURE 42.—Rig without spreader bar.

d. Pull from front.—The winch cable, when under strain, should extend directly to the front, although a slight angular pull to the side is permissible.

If the cable pulls downward at an angle of more than 20° below the level of the frame of the winch-equipped truck, the front axle and tires may be overloaded.

e. Attaching winch rope.—In attaching the winch rope to a vehicle, pass it through one tow hook and then across the front of the vehicle to the other tow hook, as shown in figure 42.

f. Avoid jerks.—Always take up load strains gradually. Jerking may damage the cable, winch, vehicle, and load.

67. MUD AND SAND.—Practically every vehicle used by the Army has enough power in lowest gear to pull out of mud or sand, *provided it gets traction*. Pull out slowly in low gear. If you can't pull out, it is best to use your winch, or get aid from another vehicle on solid ground. Don't spin your wheels. Don't "rock out." It puts a strain on your vehicle and, even if you get out, probably digs deeper so that the going will be even tougher for the vehicle which follows you.

68. FORDING STREAMS.—In cross country driving and sometimes on country roads, you may have to ford streams.

A DRIVER MUST HAVE SOMETHING LACKING WHO

Before attempting this, you should know how deep the water is. Measure it yourself if necessary. If it is not deep enough to wet your vehicle's electrical equipment, the vehicle can cross the ford under its own power, *provided, of course, that it is otherwise passable.*

Cross slowly, driving in lowest gear.

If the ford is deep enough for the spinning fan blades to catch water, loosen the fan belt before crossing. Otherwise, they may throw water over the electrical units.

If you drive your vehicle much in sandy or muddy water, you should make sure that the brakes are inspected and cleaned of sand and mud as soon afterward as possible.

69. SWAMPS AND SOFT-BOTTOM STREAMS.—If you have to cross a swamp or ford a soft-bottom stream or deep mud hole, you can increase the ground support by placing boards, brush, or other similar materials under the wheels or tracks. Pine is not well suited for this purpose. The bark wears off and leaves a slippery surface. Oak gives good results. Someone will have to hold this material down until at least one vehicle has passed over and forced it into the mud.

70. STEEP GRADES.—*a. Steep downgrades.*—Make sure that your lowest gear is engaged before attempting to drive down any grade over 30 percent. (See fig. 43.)

b. Steep upgrades.—Before driving up a steep grade, also make sure that the lowest gear is engaged. If the traction is poor you may have to use a winch. With the aid of a winch cable fastened to a tree or to a "deadman," or to other vehicles, your vehicle can pull itself up the grade. If your truck has no winch, you may get help from one that has. In the absence of a winch, ordinary block and tackle may be used.

71. DRIVING OVER HILLTOPS.—When you drive over the top of a hill, if there is a sharp descent on the other side and you have too much speed, your front wheels may jump off the ground and come down with a bang. This is pretty tough on

DOESN'T LOOK WHERE HE IS BACKING.

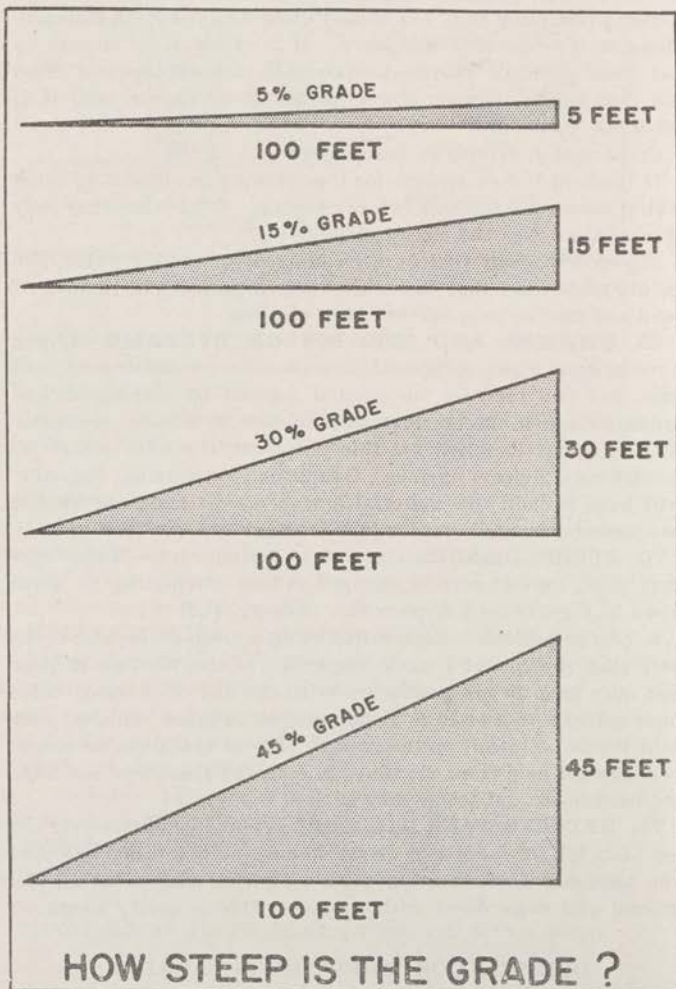


FIGURE 43.

your vehicle and may cause you a lot of trouble. Pass over the crest of the hill slowly so that it will not happen.

72. CROSSING DITCHES.—You can cross small shallow ditches easily merely by shifting into a low gear and proceeding slowly. Enter obliquely, so that one wheel leaves the ditch as the other wheel on the same axle enters it.

In crossing deep ditches, engage the lowest forward gear. On the way down, keep the clutch engaged. When you reach the bottom, release the brake and accelerate the motor enough to keep rolling, as you go up the other side. If the ditch is deep and has very steep sides, you may have to cut away the tops of the banks before attempting to cross.

73. CROSSING TRENCHES.—You can cross narrow trenches by building a makeshift bridge of any suitable and available material, such as channel iron, logs, poles or planks, but remember that your truck is heavy and you may not be an engineer. Where possible, get an officer's advice before trying to build a bridge that must support your vehicle.

Sometimes, especially with wide trenches, you can break down the sides, partly fill in the bottom and cross as you would cross a ditch.

74. HARD RUTS OR TRACKS CAN THROW YOU.—Hard ruts (frozen or sun baked) can throw your vehicle out of control or pull off a tire. Either may start a skid. When you can, keep out of hard ruts and car tracks. Ride the ridges.

75. SOFT RUTS.—It is often all right to drive in soft ruts, in loose soil, sand or mud. Soft ruts increase traction and are much less dangerous than hard ruts.

76. WOODED COUNTRY.—Woods help to screen you and your vehicle from air observation, but they also present certain problems which you must consider.

a. Look out for stumps.—A tree stump which is too high can cause serious damage to the axles and other low parts of your vehicle if you straddle it. Any stumps will injure your tires

RESPECT THE RIGHTS OF OTHERS.

if you scrape them. Try to avoid these dangers when in woods or cut woods.

b. Low limbs.—When you must drive through wooded country, whether on country roads or cross country, low hanging limbs may break your top bows. It is usually best to remove the top and all top bows for field operation. Keep alert and remove limbs which may hit your cab or load.

c. Timber on road.—Heavy timber which blocks the road may often be crossed by piling dirt or other material on each side of the timber so as to permit your vehicle to climb up one side and down the other.

d. Rocks and boulders present the same difficulties as tree stumps and you should take the same precautions.

77. WINTER CONDITIONS.—*a. Driving on ice or hard snow.*—On ice or on hard snow, particularly if it is smooth, there is great danger of skidding or slipping and a serious accident. The best way to be safe is to drive with great care.

Go slowly.

If you are on a road which slopes toward the side ditches, it may be helpful to straddle the crown in order to avoid sliding to the side (fig. 44). Obviously in such a center-of-the-road position you will have to be extremely careful to avoid crashing into other traffic.

On slippery ground, avoid rocks, car tracks, and other objects which might throw your vehicle sidewise and start a skid. Avoid sudden stops, sudden turns, and sudden speeding up or slowing down. Any sudden change in the vehicle's momentum may start your vehicle slipping and skidding.

b. Lower tire pressure on ice, hard snow, or sand.—By letting some of the air out of your tires, you increase their area of contact with the road and get more traction. This is often helpful when driving on ice, hard-packed snow, or sand, but you should do it only in an emergency.

If you have lowered the pressure in your tires, be sure to

SLOW—SCHOOL.



FIGURE 44.—Riding the crown.

pump them up to full pressure just as soon as the need for low pressure is over.

c. Starting on smooth ice or snow.—When starting on smooth ice or snow, shift into second or third gear, rather than low,

DRIVING IS YOUR JOB. DO IT WELL.

engage the clutch gradually, and do not accelerate the engine more than is necessary to keep it from stalling. The wheels will spin less than if you used low gear and you will be more likely to start.

d. Cooling system.—Be sure you have enough antifreeze to prevent your radiator from freezing. If not, you may have to drain the cooling system when your vehicle is not in use, or run the engine sufficiently to keep the coolant from freezing. A cardboard or similar radiator cover will help to prevent freezing.

e. Oil.—Remember that oil thickens in cold weather. It will make the engine harder to start. Sometimes towing or pushing your vehicle, with the gears and clutch engaged, may be a better way to start your engine than running your battery down by excessive cranking.

Under extreme arctic conditions with temperature many degrees below zero, it may be necessary to run your engine regularly and frequently day and night to keep the oil fluid enough; sometimes it may be desirable to drain the oil from the crankcase, and keep it in a warmer place while the vehicle is not in use.

f. Use of blanket.—Blankets or other covers will help to keep the engine warm after operation and aid it in warming up in starting.

g. Brakes.—Wet brake linings can freeze to the drums when the temperature falls below 32°. Frozen brakes are difficult to release. Therefore, avoid leaving brakes set overnight under these conditions. If necessary, block the wheels instead, or leave the vehicle in gear.

h. Parking.—Remember that if you park your vehicle in mud or slush, the wheels can be "frozen in" when it gets colder, causing you hard work and delay. If freezing is likely, try to park in a dry spot. If you can't find a dry spot, make one by placing any suitable and available dry material on the ground,

or dig down and clear the mud and slush from under your vehicle.

78. DRIVING IN DESERTS, SAND, OR DUST.—Desert or desert-like driving, with its sand storms and dust clouds, presents special difficulties, both from difficult terrain and dirty air.

a. Deflate tires for better traction.—When the sand is soft and the going hard, you can get greater traction by deflating the tires so as to get slightly more surface in contact with the ground. Deflating them too far, however, injures the tires and should be avoided. Be sure that the tires are not kept under-inflated any longer than is necessary.

b. Carburetor air cleaner.—This is a device for cleaning the air before it goes into your carburetor. If the outside air is full of dust and sand, the air cleaner will soon become overburdened and dirt may enter and damage your rings, pistons, cylinders and valves. There is a quantity of oil in the lower base of the unit to collect the heavy particles which fall out of the air before it passes through an oil-soaked wire mesh to take out the finer particles. When a vehicle is operating in sand and dust storms the mesh must be kept clean and the oil level must be maintained. This means checking the oil level *every day* and cleaning the mesh *every day*. If you do not know how, ask your noncommissioned officer to show you.

c. Breather-pipe-cap air cleaner.—The cap which you remove to pour oil into the crankcase sometimes contains an air cleaner also. When it is very sandy or very dusty this must be cleaned daily in this way: (1) remove it, (2) wash it in a cleansing agent, (3) soak it in oil, and (4) reinstall it.

d. Oil filter.—Your truck contains an oil filter which removes grit or other foreign particles from the oil. When you are driving in frequent dust or sand storms, it is particularly important that you examine your oil carefully each day, rubbing some of it between the tips of your finger and thumb. Or, you can wipe the dip stick on a white rag; the oil will be absorbed,

leaving any solids on the surface. If the oil seems at all gritty, report the condition immediately. It indicates that the filter is not functioning properly. The filter should have attention and the oil should be changed.

e. Fresh oil.—You should take great care to protect clean oil from dust and sand in the air at all times, especially when it is being poured into the crankcase, or when it is otherwise exposed. If necessary, you can protect it against dust-bearing or sand-bearing winds by setting up canvas screens. You can make these from tarpaulins. Don't set the filler can down in the dirt while you open the hood.

f. Excessive heat.—When driving in extremely hot weather, do not remove the sides of the hood because this reduces the efficiency of the fan. If the engine overheats, consult the officer or noncommissioned officer in charge of your unit.

Keep your radiator free of bugs, grass, leaves or anything else that clogs the air spaces.

Ask your noncommissioned officer about any plate or similar obstruction which cuts off air and keeps the radiator from cooling effectively. Insignia plates on radiators not only reduce the cooling effect but may give information to the enemy.

Watch your fan belt carefully. Be sure that the fan is operating properly with the belt at proper tension—not too loose and not too tight.

ANY CORNER MIGHT MAKE A MOURNER.

CHAPTER 5

SAFE DRIVING IN WARFARE OR MANEUVERS

79. THEATER OF OPERATIONS.—In war, the area in which a military campaign is conducted is called a "theater of operations." Here enemy action and unusual emergencies add new hazards to those which you normally face when you drive a motor vehicle.

Some men get the idea that because war involves dangerous acts, it is "smart" to be reckless all the time under war conditions.

Quite to the contrary, the more we suffer by enemy action, and the more we are compelled to take risks, the more we need to avoid losing men and property through carelessness or recklessness. A hero takes risks when he hopes to gain a worthy objective; only a fool takes risks needlessly.

80. SIMULATED WAR CONDITIONS.—Many of the tasks which we must do in a theater of operations call for experience and skill—acquired only by practice. To get that practice we hold field exercises or maneuvers to simulate, or pretend, war conditions.

In these, also, some men get the idea that because they are pretending that war conditions exist, they should be reckless. These men too are wrong.

Armies on maneuvers, in war or peace, do not actually try to kill the soldiers of the "enemy" army. They do not actually try to destroy the "enemy's" equipment or supplies. In fact, they take care to see that these losses do not occur.

In the same way, even though maneuvers may require you to do things which involve some extra risk, such as "blackout"

driving at night, there is all the more reason for you to be careful. Take no *unnecessary* risk.

81. SPECIAL TRAFFIC REGULATIONS.—In a real or imaginary theater of operations, and elsewhere if needed, you will find special traffic regulations, usually including a traffic "circulation plan."

These special regulations vary greatly. An attempt is made to have as few of them as possible. However, the greater the traffic and the fewer and poorer the roads, the greater the need for special plans to avoid confusion, delays, and accidents.

Under these regulations, military police are stationed at crossroads and junctions; many signs are posted giving special information; many roads are limited to one-way traffic, others have traffic moving only in one direction during certain hours and only in the opposite direction during other hours.

You may find that the traffic circulation plan at night is entirely different from the one used by day.

If there is much enemy air activity (real or simulated), you may find that your outfit, instead of proceeding as a unit, sends out trucks individually at intervals. You may therefore be given a copy of a circulation map showing just which roads you may use, and when. Then you will be very much on your own.

You may find that the roads are congested with troops marching on foot, with artillery, or even with civilian refugees moving to the rear. Certain roads are usually reserved for the artillery at stated times.

You may find that the right side of the road has been reserved for troops marching on foot, and that vehicles are required to keep to the left; or, sometimes, the exact reverse may be true.

82. OBSERVE AND COMPLY WITH ALL REGULATIONS.—Whatever the special regulations may be, they are all made to insure that all troops and all supplies *get there safely and on time.*

ENTER CURVES SLOWLY.

If you do not comply with some of these special regulations you may cause accidents and delay. Delay may interfere with the tactical operations, thus causing unnecessary casualties in action.

Your own safety, as well as the safe conduct of all traffic, demands that you learn all special regulations and carefully comply with them. Stay off roads on which you don't belong.

83. FOREIGN RULES OF THE ROAD.—*a. Rules differ.*—In some countries the rules of the road differ from those in the United States. For example, in many nations, including some of our own possessions, it is customary to drive to the left of the road. When United States troops occupy such territory, orders are usually issued stating whether the local rules of the road or our own will apply. When we have large forces occupying an area, our own customs may be installed, but when our forces are few, compared with the inhabitants or troops of that foreign country, our troops will probably follow local customs.

b. Foreign customs create a hazard.—Regardless of whether the driving customs of the United States or those of the foreign country are in effect when you are on duty abroad, the difference between them creates a hazard. It is hard to break long-established practices which have become almost habits.

If the foreign customs are in effect, you will have to keep constantly alert to avoid absent-mindedly doing as you would in the United States.

If the United States customs are put into effect, local drivers may forget and revert to their own practices.

In either case, you must keep constantly alert to avoid accidents due to the difference in rules of the road.

84. GENERAL SAFETY PRECAUTIONS APPLY.—When you are in a real or imaginary theater of operations, or on foreign soil, you will be fully informed of all special regulations which may apply to you.

CROSS CROSSINGS CAUTIOUSLY.

To be as safe as possible, *apply the same safety measures you would apply in normal driving except those which conflict with the special instructions.*

85. BLACKOUT DRIVING.—*a. Need for blackout driving.*—

In war, when it is necessary to keep all movements secret and free from enemy observation, motor vehicles must usually move at night, with safety blackout lights only. This blackout driving requires experience and skill. It is therefore necessary that you practice it in maneuvers so that you can operate in actual war at night without lights.

b. Blackout lamps.—Modern military vehicles are equipped with blackout lamps, which make driving in the dark considerably safer. Blackout lamps are placed on both the front and rear of modern military vehicles. They do not illuminate the road, but they do show the position of a vehicle as much as 800 feet ahead of you or behind you, depending on the weather, making it easier to drive in column and reducing the danger of collision, but cannot be seen from an airplane higher than 400 feet.

c. Blackout lamps indicate distances.—Blackout lamps are so designed that you can tell when you get too close to the vehicle ahead.

The standard U. S. Army lamps work this way—

(1) *Rear lamps.*—These are divided into four parts, which appear to you as one light, when you are 180 feet or more from the vehicle ahead. At distances between 180 and 60 feet (60 to 20 yards) there seem to be two points of light, and at distances of 60 feet (20 yards) and less you see four points of light.

One point of light informs you that you are pretty far behind the fellow ahead; two lights assure you, "O. K., you are following at a moderate distance," and four lights scream "LOOK OUT! You're getting too close for blackout driving!"

(2) *Front lamps.*—The front lamps are slightly different. Each lamp is divided into two parts. When you look at it from

TAKE IT EASY—YOU'LL LAST LONGER.

a distance of 60 feet or more, it appears to be one light. When you are within 60 feet, you see two lights, which warn you, "Look out! That vehicle is getting pretty close."

d. Other blackout lamps.—Under the stress of war you may find several other designs of blackout lamps. It may even be necessary to use some vehicles not equipped with blackout lights.

e. Know the blackout conditions.—The blackout lamps make driving in the dark easier and safer than many people believe. There are also many nights when moonlight is bright enough that you can see rather clearly. However, it is important that you know the exact conditions under which you are driving and act accordingly.

Make it a point to be sure what kind of blackout lamps, if any, are being used and what distances are indicated by their varying appearance.

f. Reducing risk in blackout driving.—Obviously the first safeguard in blackout driving is greatly reduced speed. When you first attempt blackout operation, therefore, have plenty of room and drive at a crawl.

Watch the rear blackout lights of the vehicle ahead, if you are driving in a column. It will serve as a pilot, because where it has gone safely, you can go with caution. You can see better if you open your windshield.

When practicable, post a man in the rear part of your vehicle to warn the driver who follows, if he comes too close. The warning must be given in a way which conforms with the existing blackout regulations. A screened flashlight might be permitted in the hands of a trained and reliable man. If not, a white handkerchief or some other white object will usually do.

If the vehicle which is following is equipped with forward blackout lights, he will spot it more easily. But even if the vehicle has no lamps, an alert "rear guard" can usually make it out at a reasonable distance, because few nights are totally dark.

USE YOUR BRAKES INSTEAD OF YOUR HORN.

CHAPTER 6

FOUR HIDDEN ENEMIES

86. FIRE.—Every motor-propelled vehicle must be equipped with an approved type of fire extinguisher. If yours doesn't have one, see your noncommissioned officer and get one.

Shut off the engine before refueling. Do not spill gasoline on a hot exhaust pipe.

Water used on a gasoline or oil fire spreads the flame. If you don't have enough fire extinguishers, throw sand or dirt on a blaze of this kind. This will smother it.

Gasoline vapor may catch on fire even when the spark or flame is several feet from the liquid gasoline. Therefore, if fire is near, do not fill a gasoline tank or work on a carburetor or fuel system. This means *no smoking* in any inclosed room containing gasoline, or outdoors within 25 feet of exposed gasoline. If you need light to perform the work, an electric light is the sensible and safe thing to use. Don't use open flame or lanterns.

Oily or greasy rags kept in your vehicle increase the fire hazard. Get rid of them.

Don't spill oil on the engine when filling the crankcase.

Use kerosene, rather than gasoline, when cleaning oil and grease from metal parts of your vehicle.

87. RISKY RIDING.—*a. Mounting and dismounting.*—When you are transporting individuals or troops, caution the individuals or the officer or noncommissioned officer in charge of the troops that it is unsafe for anyone to mount or dismount from your vehicle except when it is stopped. They should dismount one at a time.

b. Driver's seat.—In an emergency you need room enough to act with all the speed of which you are capable. Therefore, be

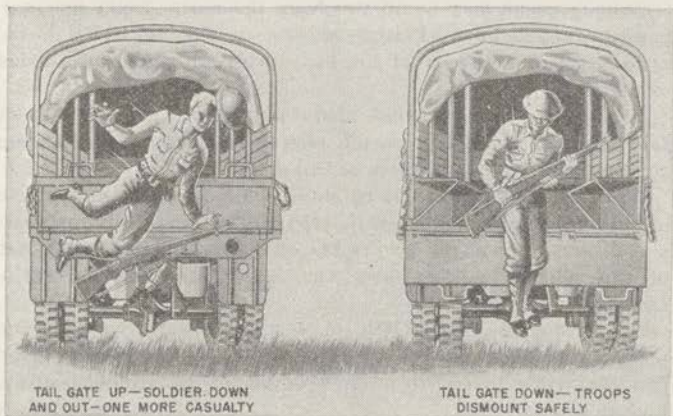


FIGURE 45.—Put tail gate down before troops mount or dismount

sure that the driver's seat is not crowded. Standard military vehicles have room for only two people on the driver's seat (yourself and one other). To be safe, don't allow any more on the seat.

c. Unauthorized passengers.—Do not permit unauthorized persons to ride in your vehicle.

d. Tail gate.—When troops or other passengers are getting on a truck, or particularly when they are getting off, open the vehicle's tail gate so that they will be less likely to trip and fall (fig. 45). But don't leave it open. Your passengers or load will be safer if you close the tail gate before starting and so will the tail gate. Make it a practice to keep the tail gate opened while the vehicle is loading or unloading and closed while the vehicle is moving.

e. Keep passengers in safe positions.—You may be compelled to drive very close to other vehicles or objects during your

GIVE THE RIGHT OF WAY.

trip, or someone may bump you from the rear. Don't let your passengers get hurt. Permit no one to ride with his head, arms, legs, or any part of his body protruding from the sides or rear of your vehicle.

For similar reasons, and also to prevent passengers from falling off or being thrown off, permit no one to ride on your running board, fenders, hood, or tail gate.

Warn all passengers not to stand except when your vehicle is halted, because if you start, stop, or turn suddenly, or have a collision, they might be thrown off balance and possibly out of the vehicle. Always keep the safety strap hooked while transporting troops.

88. UNSAFE LOADING.—*a. Load cargo safely.*—An improperly loaded cargo may shift or fall off. It may even cause a truck to overturn on a curve, in an accident, or on uneven ground.

b. Protruding loads.—Whenever possible, avoid loads which stick out over the driver's seat, or beyond the tail of your truck. Loads which stick out over the side, so that your vehicle requires a wider lane than usual, are especially dangerous.

If a load unavoidably extends more than 2 or 3 feet beyond the rear of the truck, mark it on the end so that others will plainly see it. In daylight a *red* cloth at least 12 inches square is preferable; at night, a lighted *red* lantern. Don't use green; it means "all clear" instead of "danger."

89. HOW TO LOAD.—To get the best results from your vehicle, its capacity and cargo space must be used efficiently, and therefore you must know something about loads and loading. Except under unusual circumstances, it is not part of your job to load and unload cargoes, but you are responsible for making sure of the following:

a. Do not exceed maximum authorized load.—Maximum pay loads and maximum tow loads for road operations as well as for cross country operations, are shown on plates on your instru-

IT'S YOUR LIFE—TAKE CARE OF IT.

ment panel. Do not permit your vehicle to be loaded beyond these maximums except in emergencies, and then only by order of proper authority.

b. How to know when you have sufficient load.—You do not need to weigh your truck or to know the weight of your cargo in order to judge when it is loaded to the maximum. Learn the position of the rear springs when you know the vehicle is loaded to the authorized maximum. Then when the springs sink below that position, you will know that the vehicle is overloaded or that the springs have become weak.

c. Proper location and distribution of load.—To carry its maximum cargo and to do it safely, your vehicle must be correctly loaded. If the load is unbalanced, the vehicle may overturn or at least become more difficult to handle. One loose piece of cargo may release an entire load. You should observe the following principles:

(1) Heavy supplies should be placed at the bottom of the load and evenly distributed throughout the body of the truck.

(2) The cargo should be carefully built up so as to avoid shifting (fig. 46).

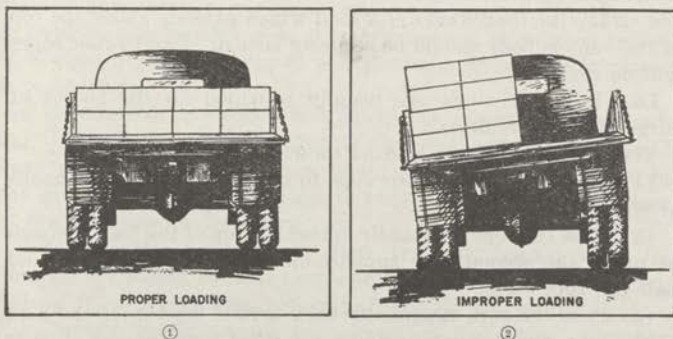


FIGURE 46.—Proper and improper loading.

LUBRICATION POSTPONES REPAIRS.

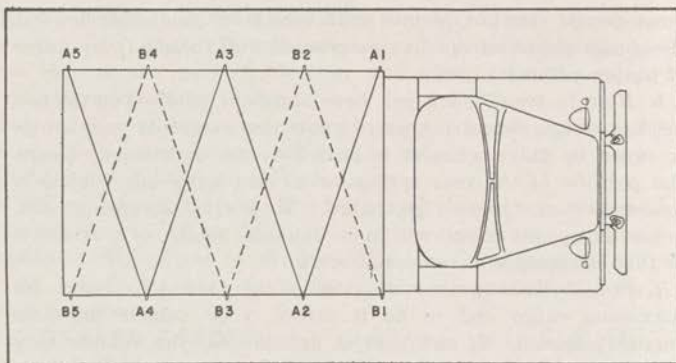


FIGURE 47.—How to lash a load.

(3) If your load is too high, it may cause swaying and danger of overturning, and will make the vehicle hard to handle. Avoid this by keeping the load low.

(4) If your vehicle is not covered, place a tarpaulin over the cargo as a protection against sun, dust, or rain.

d. Make the load secure.—A load which extends above the top of the vehicle body should be securely lashed. Two 60-foot ropes will do the job.

Lash-hooks or rings are usually provided on the bodies of cargo-carrying vehicles.

You should lash your load as shown in figure 47.

(1) Fasten the end of one rope to one of the front lash-hooks or rings (A1).

(2) Pass the rope diagonally across the top of the load through or under the second rope support on the other side (A2), and pull the rope tight.

(3) Pass the rope diagonally back across the top of the load to the first side through or under the third rope support on that side (A3) and pull the rope tight.

KEEP 'EM ROLLING

(4) Continue the process until you have reached the rear of the truck, and then fasten the end of the rope securely (A4 and A5).

(5) Using the second rope, start at the other front corner of the truck and repeat the procedure using alternate lash-hooks or rings (B1-B2-B3-B4-B5).

c. Watch your load in transit.—After your vehicle has been loaded, you are responsible for the safety of the load until you have reached your destination and unloaded the cargo. Keep alert to make sure nothing goes wrong.

90. SPECIAL CAUTIONS IN LOADING.—*a. Ammunition* is explosive. Handle it with care. No smoking. Watch out for overloading; ammunition is heavy.

b. Baled goods are best loaded on the bed of the truck. Place large and heavy bales always on bottom.

c. Barrels (with heads or empty) should be loaded on their sides, pyramided.

d. Barrels (without heads or covered with burlap) should be stood upright, on their solid ends.

e. Gas shells.—As a precaution against being overcome by leaking gas, carry a gas mask whenever you are transporting gas shells. Remember also that a gas mask is no good unless it is right at hand when you need it and you know how to put it on quickly.

f. Gasoline drums which leak should be reported before loading. If your truck or trailer is carrying gasoline, it should have a chain trailing from a metal part so that it drags on the ground with a few inches to spare. This lessens danger of fire from static electricity.

g. Inflammable rubbish.—If your truck is loaded with inflammable rubbish, such as excelsior, paper, or packing material, unload it, if practicable, before parking for the night.

h. Sacked goods should be pyramided and "tied" together by crossing the sacks.

BUT DON'T ROLL 'EM OVER.

91. CARBON MONOXIDE.—Every minute your engine is running, quantities of carbon monoxide—a deadly, odorless, colorless gas—are pouring out of the exhaust pipe. Carbon monoxide is really dangerous; it strikes without warning. If you run a gasoline engine in a closed garage or shop, you may poison or kill yourself or your companions.

Always drive with your cab window or ventilator at least partly open, regardless of the weather. Carbon monoxide may leak into the cab. When you have passengers in the rear, keep the front tarpaulin flap open to protect them from carbon monoxide.

Anyone poisoned by carbon monoxide gas should be removed to the open air and warmth and artificial respiration should be applied at once. Get medical assistance immediately.

CHAPTER 7

PREVENTIVE MAINTENANCE

92. PREVENTIVE MAINTENANCE IS ESSENTIAL TO VICTORY IN WAR.—As a soldier, you realize that rapid movement of an army is more important today than ever before in conducting a successful military campaign. The rapid blows of armored forces must be supported by fast-moving infantry and artillery, and these mobile troops must have an equally mobile supply. All this is possible with motor vehicles, *provided they keep rolling.*

Preventive maintenance is the *only* means by which motor vehicles *can* be kept rolling.

As a soldier-driver, you are the foundation upon which all preventive maintenance depends. It is your job to do those things which *prevent* your vehicle from breaking down.

Therefore, five different preventive maintenance schedules have been prescribed for you to perform. You have been, or will be, trained in how to carry them out. Therefore, it is not necessary for this guide to state in detail what they require of you. For your convenience, however, paragraphs 93 to 97, inclusive, list the items from the preventive maintenance schedule forms which are used for training purposes.

They will help you to remember the important things.

93. PREVENTIVE MAINTENANCE SCHEDULE (P. M. S.) NO. 2—"DAILY AFTER OPERATION."—You are a soldier and a member of an army, and an army must be able to act at any time, on a moment's notice. Therefore, when your vehicle comes in, you must make sure that it will be ready to roll whenever necessary. This is the purpose of Preventive Maintenance.

nance Schedule No. 2, which you perform after each tour of operation. It includes—

a. In cab, before stopping engine.

- 2-1. Hand brake
- 2-2. Engine noises—smoothness of idle
- 2-3. Temperature gage
- 2-4. Oil pressure gage
- 2-5. Viscometer
- 2-6. Ammeter
- 2-7. Tachometer
- 2-8. Air brake pressure gage
- 2-9. Fuel gage
- 2-10. Windshield wipers
- 2-11. Heater and defroster

b. In cab, after stopping engine.

- 2-12. Horn
- 2-13. Fire extinguisher
- 2-14. Rear view mirrors

c. Exterior, front, right side, rear and left side.

- 2-15. Lights
- 2-16. Windshield
- 2-17. Wheels and axle flanges
- 2-18. Brake drums and wheel hubs
- 2-19. Sheet metal
- 2-20. Power take-off and winch
- 2-21. Bumpers, towing hooks, pintle and safety chains
- 2-22. Load, tarpaulin, fastenings
- 2-23. Tractor fifth wheel and plate
- 2-24. Trailer lighting and brake connection

d. Under vehicle.

- 2-25. Steering mechanism
- 2-26. Tires
- 2-27. Spare tire carrier
- 2-28. Springs and suspensions

DON'T CHANGE GEARS IN THE

- 2-29. Flexible brake lines
- 2-30. Air brake reservoirs
- 2-31. Driving axles
- 2-32. Transmission
- 2-33. Transfer case
- 2-34. Propeller shafts

e. Under hood.

- 2-35. Radiator
- 2-36. Water leaks
- 2-37. Fan belt
- 2-38. Engine oil
- 2-39. Oil leaks
- 2-40. Oil filler cap (breather), after dusty operation
- 2-41. Carburetor air cleaner, after dusty operation
- 2-42. Spark plugs, distributor and coil
- 2-43. Fuel leaks

f. Exterior, final.

- 2-44. Refuel tank
- 2-45. Tools, tire chains and other equipment

94. PREVENTIVE MAINTENANCE SCHEDULE (P. M. S.) NO. 3—"DAILY BEFORE OPERATION."—Although you inspect and service your vehicle thoroughly after each tour of operation, there is always a chance that something might happen to it before you use it again. A slow leak may have deflated one of the tires; an oil or gas leak may have created a fire hazard or left your vehicle without fuel or lubricant; someone might have bumped into it during the night; or there may have been an act of sabotage. For this reason P. M. S. No. 3 has been designed merely as a quick check to make sure that the vehicle is still in as good order as you left it.

This before operation check is a matter of only a few moments. Many of the items can be covered by a mere glance. But it does give you the satisfaction of feeling confident that your vehicle

remains in the same good condition in which you placed it. It includes—

a. Exterior, before starting engine.

- 3-1. Vehicle in general, leaks
- 3-2. Radiator
- 3-3. Engine oil
- 3-4. Fuel

b. In cab, starting engine.

- 3-5. Starter
- 3-6. Instruments, horn, windshield wiper
- 3-7. Fire extinguisher

c. Exterior, front, right side, rear, and left side (with engine warming up).

- 3-8. Lights
- 3-9. Windshield
- 3-10. Load, tarpaulin, etc.
- 3-11. Tractor fifth wheel and plate
- 3-12. Trailer lighting and brake connections
- 3-13. Tools, tire chains and other equipment

d. Under vehicle.

- 3-14. Tires
- 3-15. Ground beneath vehicle

e. In cab, engine warmed up.

- 3-16. Engine.

95. PREVENTIVE MAINTENANCE SCHEDULE (P. M. S.) NO. 4—"DAILY DURING OPERATION."—Many of the defects which a vehicle may have can be *detected* only while the vehicle is actually in operation. Other defects may *develop* while the vehicle is in operation. You may save an accident or prevent serious damage to your vehicle by keeping constantly alert for signs of any such defect. This is the purpose of P. M. S. No. 4. When you start out in the morning you can test the steering gear, brakes, and clutch; then you will be fairly confident that they will not give trouble during the day's operation.

SAFE OPERATION OF THE VEHICLE

During the entire march you may avoid trouble by listening carefully to the sound of your motor, by observing your instruments, and by noting in general how the vehicle responds to your will. Here is the list:

- 4-1. Unusual sounds
- 4-2. Instruments
- 4-3. Steering
- 4-4. Brakes
- 4-5. Clutch
- 4-6. Transmission
- 4-7. Performance

96. PREVENTIVE MAINTENANCE SCHEDULE (P. M. S.) NO. 5—"AT HALT."—At each halt of sufficient duration you have an opportunity to observe certain items which may not have been evident while you were running. These are listed in P. M. S. No. 5.

a. In cab.

- 5-1. Hand brakes
- b. Exterior, front, right side, rear, and left side.*
 - 5-2. Windshield
 - 5-3. Brake drums and wheel hubs
 - 5-4. Load, tarpaulin, etc.
 - 5-5. Trailer lighting and brake connections

c. Under vehicle.

- 5-6. Steering mechanism
- 5-7. Tires
- 5-8. Springs and suspensions
- 5-9. Driving axles
- 5-10. Transmission
- 5-11. Transfer case

d. Under hood.

- 5-12. Radiator
- 5-13. Water leaks
- 5-14. Fan belt
- 5-15. Engine oil

IS YOUR RESPONSIBILITY.

97. PREVENTIVE MAINTENANCE SCHEDULE (P. M. S.) NO. 6—"WEEKLY."—To keep your vehicle operating smoothly, you will need to check, tighten, and service certain important units approximately once a week. This is also the time for cleaning the vehicle inside and out, and doing any other work necessary to give it a good military appearance. The weekly schedule therefore includes—

a. In cab.

- 6-1. Cab floor mat and floor.
- 6-2. Cab lining and slats
- 6-3. Upholstery
- 6-4. Clutch pedal free travel
- 6-5. Body hoist

b. Exterior, front, right side, rear, and left side.

- 6-6. Body.
- 6-7. Fenders and support bracket bolts.
- 6-8. Bumpers and support bolts.
- 6-9. Brush guards.
- 6-10. Tags and brackets.
- 6-11. Tractor "fifth wheel," towing assemblies, etc.
- 6-12. Door locks and handles.
- 6-13. Door hinges.
- 6-14. Door glass regulators.

c. Under vehicle.

- 6-15. Steering knuckles (front driving axles).
- 6-16. Shock absorbers.
- 6-17. Transfer case bolts to frame.

d. Under hood.

- 6-18. Battery.
- 6-19. Engine, clean.

e. Exterior, final.

- 6-20. General tightening.
- 6-21. Check of lubrication.
- 6-22. Vehicle, clean.
- 6-23. Tires.

QUIT YOUR SKIDDING.

98. LUBRICATION.—When everything is going well and you are in close touch with the second-echelon mechanics of your unit, the amount of lubrication which you, as a driver, must perform is limited. It is extremely probable, however, that occasions will arise in the field when the responsibility for lubricating your vehicle will fall entirely on your shoulders. That is why you should be present when your vehicle is being lubricated by second-echelon mechanics. That is also why you are expected to assist the mechanics in such lubrication. Thus, you will learn how to perform this important duty yourself if it becomes necessary. An improperly lubricated vehicle is sure to go out of action within a short time.

Different makes and models of vehicles require different kinds of lubrication and at different points. You have a maintenance manual for the vehicle to which you are assigned and the details for proper lubrication of that vehicle are contained in that manual. You should study these details carefully.

They will be given in the form of a chart, which may be arranged somewhat like the one shown in figure 48. Find the chart that applies to your vehicle, and learn to read it.

FOLLOW AT A SAFE DISTANCE.

Technical drawing of a mechanical assembly, likely a pump or engine component, showing a cross-section with various numbered parts (1-35) and flow paths indicated by arrows. The drawing includes a legend at the bottom with letters A through H and numbers 1 through 10.

3. Tie-Rod End.
4. Drag-Link End.
5. Universal Joint (Needle).
6. Slip Joint.
7. Tachometer Adapter.
10. Lever Shaft.
13. Brake Camshaft.
14. Spring Bearing.
16. King Pin.
17. Air Brake Valve.
18. Shock-Absorber Linkage.
19. Wheel Bearing.
21. Linkage.
22. Steering Gear.
23. Winch Worm Housing.
24. Winch Drum Bearing.
25. Winch Shaft.
27. Axle Universal.
28. Transmission.
29. Transfer Case.
30. Axle Housing.
33. Water Pump.
34. Distributor.
35. Generator.
38. Air Cleaner.
40. Crankcase.

43. Pintle Hook.
44. Fan Hub.
52. Winch Cable Roller Shaft.

TOOLS

- Cleaning Rag.
Screw Driver.
Open-end Wrench.
Adjustable Wrench.

INSTRUCTIONS

Clean and lubricate all points in the order indicated, except those which require disassembly.

Clean all vents.

Check and adjust level in housings.

Disassemble as separately instructed.

Drain as separately instructed.

Frame A. Chassis grease.

Frame B. Item 21, Engine oil.

Others, Gear oil.

Frame C. Item 34, Engine oil.

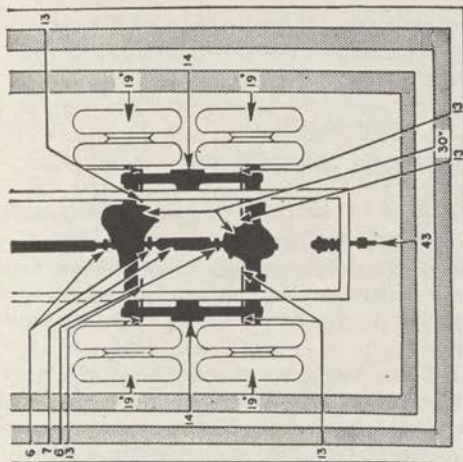
Others, Chassis grease.

Frame D. Item 22, Gear oil.

Others, Chassis grease.

*Disassembly required.

† Vent.



Lubricants, indicated by symbol

Predominating temperatures	Above 32° F.	Between 30° F. and 0° F.	Below 0° F.
Chassis grease	2	2	1.
Engine oil	30	10	10, with kerosene or Diesel fuel.
Gear oil	90	90	90.

CHAPTER 8

IF SOMETHING GOES WRONG

99. SOME TROUBLE MAY ARISE.—If you carefully carry out the preventive maintenance schedules outlined in this Driver's Manual, and if you drive carefully and safely, nothing whatsoever is likely to go wrong. However, in spite of all that you can do, something beyond your control may cause mechanical trouble or accident.

100. WHAT TO DO.—*a. How serious is the trouble?*—When you were trained in preventive maintenance, you were instructed to note certain defects when they occur. This means that faults which are not serious enough to injure the vehicle immediately, should be corrected as soon as you have the opportunity—probably at the end of the day's or night's operation. Although defects noted are not important enough to justify dropping out of a motor march for emergency repairs, they should not be ignored, for they may soon grow to serious proportions.

On the other hand, you were instructed to report immediately certain more serious faults which if neglected would quickly disable the vehicle.

If you know that your vehicle's trouble is not serious, NOTE IT; if you know that it is serious, or if you are in doubt, REPORT IMMEDIATELY.

b. How should you report?—Report promptly any trouble to your squad or section leader, or to the nearest officer or non-commissioned officer of your march unit if he is available. If not, you may report a serious defect to him by telephone, messenger, or any other practicable manner.

If it is impracticable for you to make a report, use your best

judgment as how you should act, remembering those two cardinal principles, "Keep 'em rolling" and "Get there."

101. IF YOU ARE IN A MOTOR VEHICLE ACCIDENT.—

Suppose that in spite of your care, you are involved in a motor vehicle accident. Then what should you do? There are some steps you can take to protect your own interests and those of the Government, as well as aiding any others who may be involved.

102. WHAT IS AN ACCIDENT?—To be sure that there is no mistake as to what an accident is, let's define it. An accident is a "mishap resulting in injury to a person or animal, or damage to a thing." *Note that the definition does not specify how much damage or injury is required to call it an accident.* Great or trivial as the damage may be, any mishap which causes the slightest injury or damage to any person, or any animal, or any thing, is an accident.

103. ALWAYS STOP AND INVESTIGATE.—No matter how slight the accident, always stop and investigate it. Under the general policy of the Army, you should cooperate with the civil law, which in most places requires you to stop, whether the accident be a serious crash or the slightest scratching of a fender. The only exception to this rule might be in actual combat, or in case of evident military necessity, when you are operating under definite orders not to stop.

104. TAKE PRECAUTION AGAINST FURTHER ACCIDENT.—After a motor vehicle accident, the vehicle or vehicles involved are frequently in dangerous locations and often a crowd collects in the road. Many times another accident, perhaps even more serious than the first, occurs when another vehicle crashes into the wreck or persons in a crowd.

To prevent additional accidents, damage, or injury, the first thing to do is to be sure guards, flares or lights (except in a blackout), or flags are posted to warn all other traffic to proceed with caution. If civil or military police are present they will

SIGNAL YOUR INTENTIONS.

probably direct traffic. If troops are present, ask some of them to act as guards. If neither are present, ask any civilian.

105. AID TO INJURED.—Give immediate first aid to any who are injured. If more than one person is injured, it may be best to get assistance in giving first aid, and to supervise the work of your assistants so that all get prompt and proper attention.

106. PRECAUTIONS AGAINST FIRE.—In motor vehicle accidents there is the danger of spilled gasoline. Gasoline exposed to the air creates a highly inflammable vapor which means great danger of fire. Avoid this danger by cutting off engines and stopping all smoking whenever there is spilled gasoline or whenever vehicles are badly wrecked. Permit no open flame within 25 feet of the wreck.

107. SUMMON THE PROPER AUTHORITIES.—*a. Doctor or ambulance.*—If anyone appears to be injured, summon the nearest doctor or ambulance, military or civil, whichever can be secured in the least time. Military personnel having only moderate injuries should be sent to a military hospital when practicable.

b. Fire department.—If fire breaks out and you cannot stop it with a fire extinguisher or with sand, send for the fire department.

c. Civil police.—Most State laws require that police be summoned in cases of motor vehicle accidents. The Army cooperates with civil authorities in such matters. If civil police are not on hand, send for them.

d. Military police.—If you are in an area controlled by military police and think they are needed for traffic control or to handle crowds, send for military police, or ask the highest ranking person present to do it.

108. USING SEPARATE MESSENGERS.—When there are enough people available, you may be able to get needed aid

BE ALERT. DON'T GET HURT.

more quickly by sending different messengers to summon doctors, firemen, and police, as may be needed.

109. REPORTING BY TELEPHONE.—Whenever practicable, report the accident to your commanding officer by telephone, just as soon as you have finished your urgent duties on the scene of the accident. If an assistant driver is present, you can probably have him phone while you are attending to other matters. In an emergency, you can usually get permission to use some nearby telephone, without charge. Your unit headquarters will accept a collect toll charge if you must report an accident by long-distance phone, or will reimburse you for the cost of a local call.

110. MAKING OUT AN ACCIDENT REPORT if you are involved in a crash is necessary for your protection, as well as the Government's. Naturally, if the accident was not your fault, you don't want to be blamed. Even if it *was* your fault, you don't want somebody else to exaggerate it later because you didn't report the facts and the witnesses' names when the crash occurred. To help you report this vital information, the Army has furnished you with Standard Form No. 26 (Driver's Report, Accident, Motor Transportation).

This form explains itself well enough that if you will study the sample report filled out in the appendix, and remember the following tips, you aren't likely to go wrong.

a. Keep your head.—Give first aid to those who need it; take precautions against fire and further accident; and then get your information for the report from the people who could help you before they have gone away.

b. Keep your temper.—Be courteous to people when you ask for information. Don't bother to argue with the other driver; it won't get you anywhere. If the fault was his, an investigating officer will decide that later.

c. Secure hard-to-get facts first.—(1) The first facts to get are those which you get by questioning other people, because

WAIT—DON'T JUMP THE SIGNAL.

these people may not wait for you. For example, glancing at your report form, you will see that you need to get names and addresses of all other people involved, and of all witnesses. Don't delay. Get this information while you can.

(2) Next, get the facts that you can secure only by studying the scene of the accident. Even though most of the other people have gone, you should not leave until you have carefully noted the condition of the road, the position of the vehicles, the amount of damage, and any other facts that you can't get after you have left the scene of the accident.

(3) Fill in items such as your own name, the make of your vehicle, etc. (which you know or can easily get) after you have done everything else—perhaps even after you have left the scene of the crash.

d. Be exact.—Be sure that your report gives a clear idea of what actually happened. Your diagram of the accident (question 16) should show *exactly* where the vehicles were before and after the crash, *exactly* what obstacles blocked either driver's view of line of travel. Every name should be spelled *exactly* right, every street address or pole described *exactly* by number. State *exactly* what damage you can see (as "crushed right rear wheel, bent or broken axle, crumpled fender") but do not guess at damages that you cannot see, and do not guess at the value of damaged property.

If somebody claims that you have damaged property of his, but you cannot see the damage, note only that he "claims bent frame" or whatever it is. Do the same way with injuries—report cuts, burns, broken bones, etc., of which you are certain, and note only that a person *claims* an injury when you have no way of knowing the truth—such as a strained back or internal injuries. If you cannot get the exact information on some item, write "unknown," to show that you didn't overlook it.

e. Use more paper if necessary.—Don't think that the small amount of space on this form should limit you. If you need

more space, use a separate sheet of paper to answer a question; write "See attached" in the question on your report, and attach the extra sheets firmly to the report form.

f. Check each item.—Remember that you are an agent of the United States Government. As you fill in each item of the report, check it against what you can see about you and against your own common sense. When the other driver gives you his name, see that it is the same as the name on his driver's permit. If not, find out why. If somebody gives you an address that you think is incorrect or does not exist, question him further, as tactfully as you can. If you have reason to doubt any information which you write on your report, be sure to call attention to your doubts by a note.

g. Check the entire report.—After you have finished, look over the entire report and make sure that it is complete and accurate. If the investigating officer can secure a good picture of the accident from the information you have given him, you can expect a fair deal from him. Place yourself in his position. Do all your answers make sense? Do they all say what you meant to say? If so, sign your report and turn it over to the commanding officer or to the officer or noncommissioned officer in charge, without unnecessary delay.

IS BETTER THAN A MONTH FOR REPAIRS.

APPENDIX

AN ACCIDENT REPORT, PROPERLY FILLED OUT

The accident report, Standard Form No. 26 (Driver's Report—Accident, Motor Transportation), which has been reproduced in figure 49, shows you how one driver who was unluckily involved in an accident filled out his report form.

Notice that he has done a good job. He has written clearly, has supplied all information necessary to understand WHO was in the accident, WHAT happened, WHEN and WHERE it happened, and HOW it happened. From this report, the investigating officer will be able to determine WHY the accident occurred, and WHO was responsible. Whoever was to blame, turning in a clear, understandable report will help you.

Naturally, if you have an accident, the names, addresses, numbers, diagrams, and other information will be all *different* from those shown in figure 49. But if you are careful to get the information exactly and write it clearly, you should be able to turn in a report equally as good as this.

And, by the way—is there an accident report in your vehicle *now*?

[A. G. 062.11 (4-1-42).]

BY ORDER OF THE SECRETARY OF WAR:

G. C. MARSHALL,

OFFICIAL:

Chief of Staff.

J. A. ULIO,

Major General,

The Adjutant General.

DISTRIBUTION:

X.

(For explanation of symbols see FM 21-6.)

Standard Form No. 26
Approved by the President
June 10, 1927

DRIVER'S REPORT—ACCIDENT

MOTOR TRANSPORTATION

INSTRUCTIONS TO DRIVERS

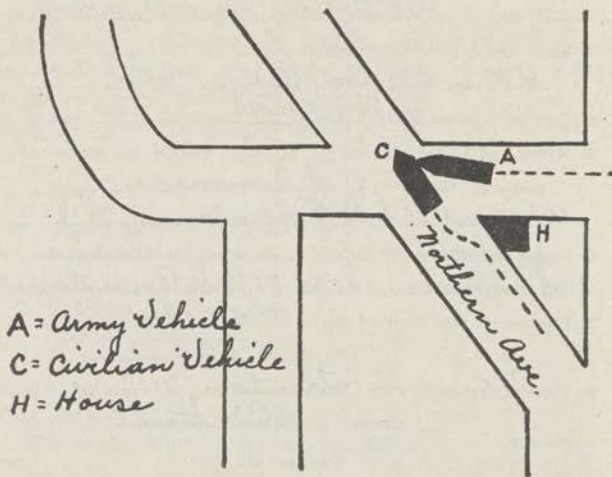
In case of injury to person or damage to property:

- Stop car and render such assistance as may be needed.
- Fill out this form, ON THE SPOT, so far as possible.
- Deliver this report promptly to your immediate superior.

Failure to observe these instructions will result in disciplinary action.

- Name of Government driver: Pvt. 1 Cl. Benjamin Brown # 000000
- Stationed at 725 P.M. Co. Fort Dix N.J.
- Make and type of Government vehicle G.M.C. 2 1/2 ton Cargo - 6x6
- Service number W 1922249
- Name and address of owner of other vehicle (or owner of property damaged) R. S. Sommers
101 West 85th St Bordentown, N.J.
- Name and address of driver of other vehicle Deane
Sommers, 101 W. 85th St Bordentown, N.J.
- License of other vehicle: State N.J. - 1941
No. L. 2 628
- Place of accident: City Trenton, N.J.
Street 26th Street

9. Date of accident May 8-, 1941.. Hour 6¹³ P.M.
10. Names and addresses of persons injured; nature of injuries:
R. L. Sommers - cut on forehead
R. A. Water claims internal injury
Deane Sommers claims ankle sprained
All of 101 West 85th St., Bordentown, N. J.
11. Describe damage to Government vehicle None
12. Describe damage to privately owned vehicle, or other property: Right running board,
fenders and door smashed



13. What signal was given by each driver prior to accident?

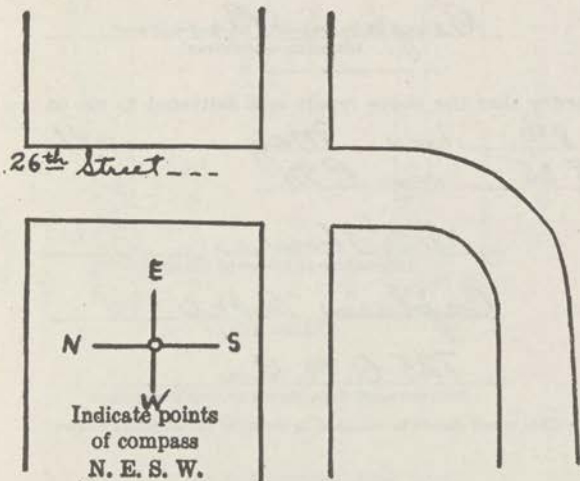
*I sounded horn 50 ft from intersection.
Did not hear or see any signal from
other vehicle.*

14. State condition of light, weather, and roadway:

*Dull
day light. Visibility good. Weather
clear. Road 4 Lane Concrete, dry
and level.*

15. Explain how accident happened:
- Car came out of
intersection on my left. I tried to
turn to right to avoid him but could not.
Could not see account of house*

16. Label streets and indicate measurements; show the position of each vehicle at the time of the accident and show by dotted lines the course of each vehicle just before and just after the collision.



17. Was an investigation made by a policeman (civil or military)? Yes If so, state

Name Peter Martini No. —

Precinct or station N. J. State Police

18. Names and addresses of persons other than driver in Government car: —

Det. 1 Cl. E. D. Jones 58122580
725 Q. M. Bn., Fort Dix, N. J.

19. Names and addresses of other witnesses:

Raymond Bodine, Prince St. Bordentown, N. J.
Frank J. Mayor, 333 S. State St
Frenton, N. J.

Benjamin Brown
(Signature of driver)

I certify that the above report was delivered to me on
the 8th day of May, 1941,
at 8:35 o'clock P.M.

V. K. House
(Signature of officer in charge)

Captain, Q. M. C.
(Official title)

725 Q. M. Bn.
(Government department or establishment)

NOTE.—This report should be attached to report of Investigating Officer.

W135:10-460 ch

TEXAS STATE COLLEGE FOR WOMEN
LIBRARY

TM 10-460
C 1

TECHNICAL MANUAL
DRIVER'S MANUAL

CHANGES
No. 1

WAR DEPARTMENT,
WASHINGTON, March 18, 1943.

TM 10-460, May 6, 1942, is changed as follows:

66. REDUCING STRAIN ON A WINCH RIG.

* * * * *

e. Attaching winch rope (Superseded).—There are three methods of attaching winch rope, depending upon equipment available.

(1) Attach a chain or rope to the two tow hooks with a spreader bar to divide the pull equally between the two hooks, and attach the winch cable hook as shown in figure 42.

(2) If a spreader bar is not available, attach the chain or rope in the following manner: Pass the rope or chain under the bumper bar, up over the side rail, then down under the bumper bar; then attach the rope or chain to the tow hook or to itself (fig. 42¼). Steel cable should not be wrapped around the bumper bar, as the cable would be deformed or broken.

(3) If neither of the above methods can be followed, the winch cable hook should be attached to one of the tow hooks as shown in figure 42½. Tow the vehicle carefully, especially on slippery terrain, when using this method or when the chain or rope is wrapped around the bumper bar, keeping in mind the "slewing" (one-sided) tendency caused by the off-center pull.

NOTE.—Under no circumstances should the winch cable be passed through one tow hook and attached to the other tow hook, because this will damage the hooks, bumper bar, cable, and is dangerous to personnel.

* * * * *

[A. G. 062.11 (1-15-43).] (C 1, Mar. 18, 1943.)

FIGURE 42 is rescinded and the following substituted therefor.

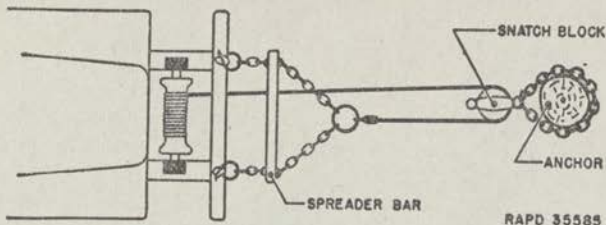


FIGURE 42.—Rig with spreader bar.

[A. G. 062.11 (1-15-43).] (C 1, Mar. 18, 1943.)

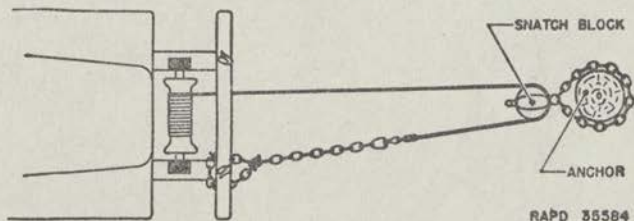


FIGURE 42¼.—Rig with chain passed under the bumper bar.

[A. G. 062.11 (1-15-43).] (C 1, Mar. 18, 1943.)

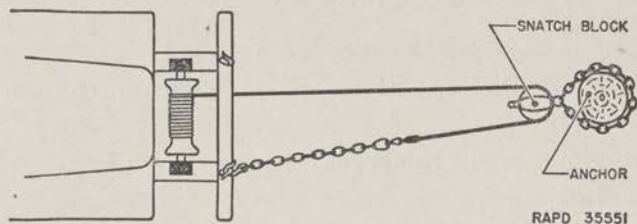


FIGURE 42½.—Rig without spreader bar.

[A. G. 062.11 (1-15-43).] (C 1, Mar. 18, 1943.)

BY ORDER OF THE SECRETARY OF WAR:

G. C. MARSHALL,
Chief of Staff.

OFFICIAL:

J. A. ULIO,
*Major General,
The Adjutant General.*

**KEEP YOUR ACCIDENT REPORT
AND OPERATOR'S PERMIT
IN THIS POCKET**

~~XXXXXXXXXXXX~~
NTSU LIBRARY

WITHDRAWN

ser
CL 1942 modact p 861

UNT LIBRARIES DENTON TX 76203



1001895764