

SUBCHAPTER G—NOISE ABATEMENT PROGRAMS

PART 201—NOISE EMISSION STANDARDS FOR TRANSPORTATION EQUIPMENT; INTERSTATE RAIL CARRIERS

SOURCE: 45 FR 1263, Jan. 4, 1980, unless otherwise noted.

Subpart A—General Provisions

Subpart A—General Provisions

- Sec.
201.1 Definitions.
APPENDIX A TO SUBPART A OF PART 201—
SWITCHER LOCOMOTIVES

Subpart B—Interstate Rail Carrier Operations Standards

- 201.10 Applicability.
201.11 Standard for locomotive operation under stationary conditions.
201.12 Standard for locomotive operation under moving conditions.
201.13 Standard for rail car operations.
201.14 Standard for retarders.
201.15 Standard for car coupling operations.
201.16 Standard for locomotive load cell test stands.

Subpart C—Measurement Criteria

- 201.20 Applicability and purpose.
201.21 Quantities measured.
201.22 Measurement instrumentation.
201.23 Test site, weather conditions and background noise criteria for measurement at a 30 meter (100 feet) distance of the noise from locomotive and rail car operations and locomotive load cell test stands.
201.24 Procedures for measurement at a 30 meter (100 feet) distance of the noise from locomotive and rail car operations and locomotive load cell test stands.
201.25 Measurement location and weather conditions for measurement on receiving property of the noise of retarders, car coupling, locomotive load cell test stands, and stationary locomotives.
201.26 Procedures for the measurement on receiving property of retarder and car coupling noise.
201.27 Procedures for: (1) Determining applicability of the locomotive load cell test stand standard and switcher locomotive standard by noise measurement on a receiving property; (2) measurement of locomotive load cell test stands more than 120 meters (400 feet) on a receiving property.
201.28 Testing by railroad to determine probable compliance with the standard.

AUTHORITY: Noise Control Act of 1972, sec. 17(a), 86 Stat. 1234 (42 U.S.C. 4916(a)).

§ 201.1 Definitions.

As used in this part, all terms not defined herein shall have the meaning given them in the Act:

(a) *Act* means the Noise Control Act of 1972 (Pub. L. 92-574, 86 Stat. 1234).

(b) *Car Coupling Sound* means a sound which is heard and identified by the observer as that of car coupling impact, and that causes a sound level meter indicator (FAST) to register an increase of at least ten decibels above the level observed immediately before hearing the sound.

(c) *Carrier* means a common carrier by railroad, or partly by railroad and partly by water, within the continental United States, subject to the Interstate Commerce Act, as amended, excluding street, suburban, and interurban electric railways unless operated as a part of a general railroad system of transportation.

(d) *Classification of Railroads* means the division of railroad industry operating companies by the Interstate Commerce Commission into three categories. As of 1978, Class I railroads must have annual revenues of \$50 million or greater, Class II railroads must have annual revenues of between \$10 and \$50 million, and Class III railroads must have less than \$10 million in annual revenues.

(e) *Commercial Property* means any property that is normally accessible to the public and that is used for any of the purposes described in the following standard land use codes (reference *Standard Land Use Coding Manual*, U.S. DOT/FHWA, reprinted March 1977): 53-59, Retail Trade; 61-64, Finance, Insurance, Real Estate, Personal, Business and Repair Services; 652-659, Legal and other professional services; 671, 672, and 673 Governmental Services; 692 and 699, Welfare, Charitable and Other Miscellaneous Services; 712 and 719, Nature exhibitions and other Cultural Activities; 721, 723, and 729, Entertainment, Public and other Public Assembly; and

§201.1

40 CFR Ch. I (7-1-24 Edition)

74-79, Recreational, Resort, Park and other Cultural Activities.

(f) *dB(A)* is an abbreviation meaning A-weighted sound level in decibels, reference: 20 micropascals.

(g) *Day-night Sound Level* means the 24-hour time of day weighted equivalent sound level, in decibels, for any continuous 24-hour period, obtained after addition of ten decibels to sound levels produced in the hours from 10 p.m. to 7 a.m. (2200-0700). It is abbreviated as L_{dn} .

(h) *Decibel* means the unit measure of sound level, abbreviated as dB.

(i) *Energy Average Level* means a quantity calculated by taking ten times the common logarithm of the arithmetic average of the antilogs of one-tenth of each of the levels being averaged. The levels may be of any consistent type, e.g. maximum sound levels, sound exposure levels, and day-night sound levels.

(j) *Energy Summation of Levels* means a quantity calculated by taking ten times the common logarithm of the sum of the antilogs of one-tenth of each of the levels being summed. The levels may be of any consistent type, e.g., day-night sound level or equivalent sound level.

(k) *Equivalent Sound Level* means the level, in decibels, of the mean-square A-weighted sound pressure during a stated time period, with reference to the square of the standard reference sound pressure of 20 micropascals. It is the level of the sound exposure divided by the time period and is abbreviated as L_{eq} .

(l) *Fast Meter Response* means that the "fast" response of the sound level meter shall be used. The fast dynamic response shall comply with the meter dynamic characteristics in paragraph 5.3 of the American National Standard Specification for Sound Level Meters, ANSI S1.4-1971. This publication is available from the American National Standards Institute, Inc., 1430 Broadway, New York, New York 10018.

(m) *Idle* means that condition where all engines capable of providing motive power to the locomotive are set at the lowest operating throttle position; and where all auxiliary non-motive power engines are not operating.

(n) *Interstate Commerce* means the commerce between any place in a State and any place in another State, or between places in the same State through another State, whether such commerce moves wholly by rail or partly by rail and partly by motor vehicle, express, or water. This definition of "interstate commerce" for purposes of this regulation is similar to the definition of "interstate commerce" in section 203(a) of the Interstate Commerce Act (49 U.S.C. 303(a)).

(o) *Load Cell* means a device external to the locomotive, of high electrical resistance, used in locomotive testing to simulate engine loading while the locomotive is stationary. (Electrical energy produced by the diesel generator is dissipated in the load cell resistors instead of the traction motors).

(p) *Locomotive* means for the purpose of this regulation, a self-propelled vehicle designed for and used on railroad tracks in the transport or rail cars, including self-propelled rail passenger vehicles.

(q) *Locomotive Load Cell Test Stand* means the load cell §201.1(o) and associated structure, equipment, trackage and locomotive being tested.

(r) *Maximum Sound Level* means the greatest A-weighted sound level in decibels measured during the designated time interval or during the event, with either fast meter response §201.1(l) or slow meter response §201.1(ii) as specified. It is abbreviated as L_{max} .

(s) *Measurement Period* means a continuous period of time during which noise of railroad yard operations is assessed, the beginning and finishing times of which may be selected after completion of the measurements.

(t) *Rail Car* means a non-self-propelled vehicle designed for and used on railroad tracks.

(u) *Railroad* means all the roads in use by any common carrier operating a railroad, whether owned or operated under a contract, agreement, or lease.

(v) *Receiving Property Measurement Location* means a location on receiving property that is on or beyond the railroad facility boundary and that meets the receiving property measurement location criteria of subpart C.

(w) *Receiving Property* means any residential or commercial property that receives the sound from railroad facility operations, but that is not owned or operated by a railroad; except that occupied residences located on property owned or controlled by the railroad are included in the definition of "receiving property." For purposes of this definition railroad crew sleeping quarters located on property owned or controlled by the railroad are not considered as residences. If, subsequent to the publication date of these regulations, the use of any property that is currently not applicable to this regulation changes, and it is newly classified as either residential or commercial, it is not receiving property until four years have elapsed from the date of the actual change in use.

(x) *Residential Property* means any property that is used for any of the purposes described in the following standard land use codes (ref. *Standard Land Use Coding Manual*. U.S. DOT/FHWA Washington, DC, reprinted March 1977): 1, Residential; 651, Medical and other Health Services; 68, Educational Services; 691, Religious Activities; and 711, Cultural Activities.

(y) *Retarder (Active)* means a device or system for decelerating rolling rail cars and controlling the degree of deceleration on a car by car basis.

(z) *Retarder Sound* means a sound which is heard and identified by the observer as that of a retarder, and that causes a sound level meter indicator at fast meter response § 201.1(l) to register an increase of at least ten decibels above the level observed immediately before hearing the sound.

(aa) *Sound Level* means the level, in decibels, measured by instrumentation which satisfies the requirements of American National Standard Specification for Sound Level Meters S1.4-1971 Type 1 (or S1A) or Type 2 if adjusted as shown in Table 1. This publication is available from the American National Standards Institute, Inc., 1430 Broadway, New York, New York 10018. For the purpose of these procedures the sound level is to be measured using the A-weighting of spectrum and either the FAST or SLOW dynamic averaging characteristics, as designated. It is abbreviated as L_A .

(bb) *Sound Exposure Level* means the level in decibels calculated as ten times the common logarithm of time integral of squared A-weighted sound pressure over a given time period or event divided by the square of the standard reference sound pressure of 20 micropascals and a reference duration of one second.

(cc) *Sound Pressure Level* (in stated frequency band) means the level, in decibels, calculated as 20 times the common logarithm of the ratio of a sound pressure to the reference sound pressure of 20 micropascals.

(dd) *Special Purpose Equipment* means maintenance-of-way equipment which may be located on or operated from rail cars including: Ballast cribbing machines, ballast regulators, conditioners and scarifiers, bolt machines, brush cutters, compactors, concrete mixers, cranes and derricks, earth boring machines, electric welding machines, grinders, grouters, pile drivers, rail heaters, rail layers, sandblasters, snow plows, spike drivers, sprayers and other types of such maintenance-of-way equipment.

(ee) *Special Track Work* means track other than normal tie and ballast bolted or welded rail or containing devices such as retarders or switching mechanisms.

(ff) *Statistical Sound Level* means the level in decibels that is exceeded in a stated percentage (x) of the duration of the measurement period. It is abbreviated as L_x .

(gg) *Switcher Locomotive* means any locomotive designated as a switcher by the builder or reported to the ICC as a switcher by the operator-owning-railroad and including, but not limited to, all locomotives of the builder/model designations listed in Appendix A to this subpart.

(hh) *Warning Device* means a sound emitting device used to alert and warn people of the presence of railroad equipment.

(ii) *Slow Meter Response* means that the slow response of the sound level meter shall be used. The slow dynamic response shall comply with the meter dynamic characteristics in paragraph 5.4 of the American National Standard Specification for Sound Level Meters. ANSI S1.4-1971. This publication is

Pt. 201, Subpt. A, App. A

available from the American National Standards Institute Inc., 1430 Broadway, New York, New York 10018.

[45 FR 1263, Jan. 4, 1980, as amended at 47 FR 14709, Apr. 6, 1982]

APPENDIX A TO SUBPART A OF PART 201—SWITCHER LOCOMOTIVES

[The following locomotives are considered to be "switcher locomotives" under the general definition of this regulation]

Type	Engine
General Electric Co.	
44 ton	8-D17000(2).
70 ton	6-CBFWL-6T.
95 ton	6-CBFWL-6T.
Electromotive Division (GMC)	
SC	8-201A.
NC	12-201A.
NC1	12-201A.
NC2	12-201A.
NW	12-201A.
NW1	12-201A.
NW1A	12-201A.
NW2	12-567.
NW2	12-567A.
NW3	12-567.
NW4	12-201A.
NW5	12-567B.
SW	8-201A/6-567.
SW1	6-567A/AC.
SW2	6-567.
SW3	6-567.
SW600	6-567C.
SW7	12-567A.
SW8	8-567B/BC.
SW900	8-567B.
SW9	12-567B/BC/C.
SW1200	12-567C.
SW1000	8-645E.
SW1001	8-645E.
SW1500	12-645E.
MP15	12-645E.
MP15AC	12-645E.
GMD1	12-567C.
RS1325	12-567C.
Transfer Switcher including "Cow and Calf"	
T	12-201A(2)
TR	12-567(2)
TR1	16-567(2)
TR2	12-567A(2)
TR3	12-567(3)
TR4	12-567A(2)
TR5	12-567B(2)
TR6	8-567B(2)
Baldwin	
VO-660	6-VO.
DS-446	6-606NA.
DS4475	6-750.
S-8	6-606.
VO-1000	8-VO.
DS-4410	8-608NA.
DS-4410	6-606SC.
S-12	6-606A.
DRS-4410 ¹	6-606SC.
DRS-12 ¹	6-606A.

40 CFR Ch. I (7-1-24 Edition)

[The following locomotives are considered to be "switcher locomotives" under the general definition of this regulation]

Type	Engine
Fairbanks Morse	
H-10-44	6-OP.
H-12-44	6-OP.
H-12-44TS	6-OP.
H-12-46 ¹	6-OP.
Lima	
750 hp.	6-Hamilton.
800 hp.	6-Hamilton.
1000 hp.	8-Hamilton.
1200 hp.	8-Hamilton.
LRS ¹	8-Hamilton.
TL ¹	8-Hamilton (2).
ALCO and MLW	
S1	6-539NA.
S2	6-539T.
S3	6-539NA.
S4	6-539T.
S5	6-251.
S6	6-251A,B.
S7	6-539.
S10	6-539.
S11	6-539.
S12	6-539T.
S13	6-251C.
RSD-1	6-539.
RSC-13	6-539.
RSC-24	12-244.
RS1	6-539T.
RS2 ¹	12-244.
RS3 ¹	12-244.
RS10 ¹	12-244.
RSC-2 ¹	12-244.
RS3 ¹	12-244.
RSD-4 ¹	12-244.
RSD-5 ¹	12-244.
T6	6-251B.
C-415 ¹	8-251F.
M-420TR	12-251.

¹ These models may be found assigned to road service as well as switcher service, but are considered switcher locomotives for the purpose of this regulation.

Subpart B—Interstate Rail Carrier Operations Standards

§ 201.10 Applicability.

The provisions of this subpart apply to all rail cars and all locomotives, except steam locomotives, operated or controlled by carriers as defined in subpart A of this part, except that § 201.11 (a), (b), and (c) do not apply to gas turbine-powered locomotives and to any locomotive type which cannot be connected by any standard method to a load cell. They apply to the total sound level emitted by rail cars and locomotives operated under the conditions specified, including the sound produced by refrigeration and air conditioning

units which are an integral element of such equipment. The provisions of this subpart apply to all active retarders, all car coupling operations, all switcher locomotives, and all load cell test stands. These provisions do not apply to the sound emitted by a warning device, such as a horn, whistle or bell when operated for the purpose of safety. They do not apply to special purpose equipment which may be located on or operated from railcars; they do not apply to street, suburban or inter-urban electric railways unless operated as a part of a general railroad system of transportation. When land use changes after the publication date of this regulation from some other use to residential or commercial land use around a specific railyard facility, this regulation will become effective four (4) years from the date of that land use change.

§ 201.11 Standard for locomotive operation under stationary conditions.

(a) Commencing December 31, 1976, no carrier subject to this regulation shall operate any locomotive to which this regulation is applicable, and of which manufacture is completed on or before December 31, 1979, which produces A-weighted sound levels in excess of 93 dB at any throttle setting except idle, when operated singly and when connected to a load cell, or in excess of 73 dB at idle when operated singly, and when measured in accordance with the criteria specified in Subpart C of this part with slow meter response at a point 30 meters (100 feet) from the geometric center of the locomotive along a line that is both perpendicular to the centerline of the track and originates at the locomotive geometric center.

(b) No carrier subject to this regulation shall operate any locomotive to which this regulation is applicable, and of which manufacture is completed after December 31, 1979, which produces A-weighted sound levels in excess of 87 dB at any throttle setting except idle, when operated singly and when connected to a load cell, or in excess of 70 dB at idle when operated singly, and when measured in accordance with the criteria specified in Subpart C of this part with slow meter response at a point 30 meters (100 feet) from the geo-

metric center of the locomotive along a line that is both perpendicular to the centerline of the track and originates at the locomotive geometric center.

(c) Commencing January 15, 1984, no carrier subject to this regulation may operate any switcher locomotive to which this regulation is applicable, and of which manufacture is completed on or before December 31, 1979, which produces A-weighted sound levels in excess of 87 dB at any throttle setting except idle, when operated singly and when connected to a load cell, or in excess of 70 dB at idle, and when measured in accordance with the criteria specified in Subpart C of this part with slow meter response at a point 30 meters (100 feet) from the geometric center of the locomotive along a line that is both perpendicular to the centerline of the track and originates at the locomotive geometric center. All switcher locomotives that operate in a particular railroad facility are deemed to be in compliance with this standard if the A-weighted sound level from stationary switcher locomotives, singly or in combination with other stationary locomotives, does not exceed 65 dB when measured with fast meter response at any receiving property measurement location near that particular railyard facility and when measured in accordance with Subpart C of this regulation.

[45 FR 1263, Jan. 4, 1980; 47 FR 14709, Apr. 6, 1982]

§ 201.12 Standard for locomotive operation under moving conditions.

(a) Commencing December 31, 1976, no carrier subject to this regulation may operate any locomotive or combination of locomotives to which this regulation is applicable, and of which manufacture is completed on or before December 31, 1979, which produces A-weighted sound levels in excess of 96 dB when moving at any time or under any condition of grade, load, acceleration, or deceleration, when measured in accordance with the criteria specified in Subpart C of this regulation with fast meter response at 30 meters (100 feet) from the centerline of any section of track having less than a two (2) degree curve (or a radius of curvature greater than 873 meters (2865 feet)).

§ 201.13

(b) No carrier subject to this regulation may operate any locomotive or combination of locomotives to which this regulation is applicable, and of which manufacture is completed after December 31, 1979, which produce A-weighted sound levels in excess of 90 dB when moving at any time or under any condition of grade, load, acceleration, or deceleration, when measured in accordance with the criteria specified in Subpart C of this part with fast meter response at 30 meters (100 feet) from the centerline of any section of track having less than a two (2) degree curve (or a radius of curvature greater than 873 meters (2,865 feet)).

(c) Commencing January 15, 1984, no carrier subject to this regulation may operate any switcher locomotive or a combination of switcher locomotives to which this regulation is applicable, and of which manufacture is completed on or before December 31, 1979 which produce A-weighted sound levels in excess of 90 dB when moving at any time or under any condition of grade, load, acceleration or deceleration, and when measured in accordance with the criteria in Subpart C of this part with fast meter response at 30 meters (100 feet) from the centerline of any section of track having less than a two (2) degree curve (or a radius of curvature greater than 873 meters (2,865 feet)). All switcher locomotives that operate in a particular railroad facility are deemed to be in compliance with this standard if the A-weighted sound level from stationary switcher locomotives, singly or in combination with other stationary locomotives, does not exceed 65 dB when measured with fast meter response at any receiving property measurement location near that particular railyard facility and when measured in accordance with Subpart C of this regulation.

[45 FR 1263, Jan. 4, 1980; 47 FR 14709, Apr. 6, 1982]

§ 201.13 Standard for rail car operations.

Effective December 31, 1976, no carrier subject to this regulation shall operate any rail car or combination of rail cars which while in motion produce sound levels in excess of (1) 88 dB(A) at rail car speeds up to and in-

40 CFR Ch. I (7-1-24 Edition)

cluding 75 km/hr (45 mph); or (2) 93 dB(A) at rail car speeds greater than 72 km/hr (45 mph); when measured in accordance with the criteria specified in Subpart C of this part with fast meter response at 30 meters (100) feet from the centerline of any section of track which is free of special track work or bridges or trestles and which exhibits less than a two (2) degree curve (or a radius of curvature greater than 873 meters (2,865 feet)).

[45 FR 1263, Jan. 4, 1980; 47 FR 14709, Apr. 6, 1982]

§ 201.14 Standard for retarders.

Effective January 15, 1984, no carrier subject to this regulation shall operate retarders that exceed an adjusted average maximum A-weighted sound level of 83 dB at any receiving property measurement location, when measured with fast meter response in accordance with Subpart C of this part.

[45 FR 1263, Jan. 4, 1980; 47 FR 14709, Apr. 6, 1982]

§ 201.15 Standard for car coupling operations.

Effective January 15, 1984, no carrier subject to this regulation shall conduct car coupling operations that exceed an adjusted average maximum A-weighted sound level of 92 dB at any receiving property measurement location, when measured with fast meter response in accordance with Subpart C of this part, except, such coupling will be found in compliance with this standard and the carrier will be considered in compliance, if the railroad demonstrates that the standard is exceeded at the receiving property measurement locations (where the standard was previously exceeded) when cars representative of those found to exceed the standard are coupled at similar locations at coupling speeds of eight miles per hour or less.

[45 FR 1263, Jan. 4, 1980; 47 FR 14709, Apr. 6, 1982]

§ 201.16 Standard for locomotive load cell test stands.

(a) Effective January 15, 1984, no carrier subject to this regulation shall operate locomotive load cell test stands that exceed an A-weighted sound level

of 78 dB when measured with slow meter response in accordance with Subpart C of this part excluding §201.23 (b) and (c), at a point 30 meters (100 feet) from the geometric center of the locomotive undergoing test, along a line that is both perpendicular to the centerline of the track and originates at the locomotive geometric center, and in the direction most nearly towards the closest receiving property measurement location. All locomotive load cell test stands in a particular railroad facility are in compliance with this standard if the A-weighted sound level from the load cell does not exceed 65 dB at any receiving property measurement location near that particular railyard facility and when measured with fast meter response in accordance with Subpart C of this regulation.

(b) If the conditions of any part of §201.23(a) cannot be met at a specific load cell test stand site, then the A-weighted sound level from that specific load cell test stand must not exceed 65 dB when measured with fast meter response at a receiving property measurement location more than 120 meters (400 feet) from the geometric center of the locomotive being tested and in accordance with Subpart C of this regulation.

[45 FR 1263, Jan. 4, 1980; 47 FR 14709, Apr. 6, 1982]

Subpart C—Measurement Criteria

§ 201.20 Applicability and purpose.

The following criteria are applicable to and contain the necessary parameters and procedures for the measurement of the noise emission levels prescribed in the standards of Subpart B of this part. These criteria are specified in order to further clarify and define such standards. Equivalent measurement procedures may be used for establishing compliance with these regulations. Any equivalent measurement procedure, under any circumstance, shall not result in a more stringent noise control requirement than those specified in this regulation using the measurement procedures in Subpart C.

§ 201.21 Quantities measured.

The quantities to be measured under the test conditions described below, are the A-weighted sound levels for “fast” or “slow” meter response as defined in the American National Standard S1.4-1971.

§ 201.22 Measurement instrumentation.

(a) A sound level meter or alternate sound level measurement system that meets, as a minimum, all the requirements of American National Standard S1.4-1971¹ for a Type 1 (or S1A) instrument must be used with the “fast” or “slow” meter response characteristic as specified in Subpart B. To insure Type 1 response, the manufacturer’s instructions regarding mounting or orienting of the microphone, and positioning of the observer must be observed. In the event that a Type 1 (or S1A) instrument is not available for determining non-compliance with this regulation, the measurements may be made with a Type 2 (or S2A), but with the measured levels reduced by the following amount to account for possible measurement instrument errors pertaining to specific measurements and sources:

TABLE 1—SOUND LEVEL CORRECTIONS WHEN USING A TYPE 2 (OR S2A) INSTRUMENT

Measurement section	Source	Decibels ¹
201.24	Locomotives	0
	Rail cars	0
	Locomotive load cell test stand	0
201.26	Retarder	4
	Car coupling	2
201.27	Locomotive load cell test stand	0
	Stationary locomotive	0

¹Amount of correction to be subtracted from measured level (dB).

(b) A microphone windscreen and an acoustic calibrator of the coupler type must be used as recommended by: (1) the manufacturer of the sound level meter or (2) the manufacturer of the microphone. The choice of both devices must be based on ensuring that Type 1 or 2 performance, as appropriate, is maintained for frequencies below 10,000 Hz.

¹American National Standards are available from the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.

§ 201.23

40 CFR Ch. I (7-1-24 Edition)

§ 201.23 Test site, weather conditions and background noise criteria for measurement at a 30 meter (100 feet) distance of the noise from locomotive and rail car operations and locomotive load cell test stands.

(a) The standard test site shall be such that the locomotive or train radiates sound into a free field over the ground plane. This condition may be considered fulfilled if the test site consists of an open space free of large, sound reflecting objects, such as barriers, hills, signboards, parked vehicles, locomotives or rail cars on adjacent tracks, bridges or buildings within the boundaries described by Figure 1, as well as conforms to the other requirements of this § 201.23.

(b) Within the complete test site, the top of at least one rail upon which the locomotive or train is located shall be visible (line of sight) from a position 1.2 meters (4 feet) above the ground at the microphone location, except as provided in paragraph (c) of this section.

(c) Ground cover such as vegetation, fenceposts, small trees, telephone poles, etc., shall be limited within the area in the test site between the vehicle under test and the measuring microphone such that 80 percent of the top of at least one rail along the entire test section of track be visible from a position 1.2 meters (4 feet) above the ground at the microphone location; except that no single obstruction shall account for more than 5 percent of the total allowable obstruction.

(d) The ground elevation at the microphone location shall be within plus 1.5 meters (5 feet) or minus 3.0 meters (10 feet) of the elevation of the top of the rail at the location in-line with the microphone.

(e) Within the test site, the track shall exhibit less than a 2 degree curve or a radius of curvature greater than 873 meters (2,865 feet). This paragraph shall not apply during a stationary test. The track shall be tie and ballast, free of special track work and bridges or trestles.

(f) Measurements shall not be made during precipitation.

(g) The maximum A-weighted fast response sound level observed at the test site immediately before and after the test shall be at least 10 dB(A) below the

level measured during the test. For the locomotive and rail car pass-by tests this requirement applies before and after the train containing the rolling stock to be tested has passed. This background sound level measurement shall include the contribution from the operation of the load cell, if any, including load cell contribution during test.

(h) Noise measurements may only be made if the measured wind velocity is 19.3 km/hr (12 mph) or less. Gust wind measurements of up to 33.2 km/hr (20 mph) are allowed.

§ 201.24 Procedures for measurement at a 30 meter (100 feet) distance of the noise from locomotive and rail car operations and locomotive load cell test stands.

(a) *Microphone positions.* (1) The microphone shall be located within the test site according to the specifications given in the test procedures of paragraphs (b), (c) and (d) of this section, and shall be positioned 1.2 meters (4 feet) above the ground. It shall be oriented with respect to the source in accordance with the manufacturer's recommendations.

(2) The observer shall not stand between the microphone and the source whose sound level is being measured.

(b) *Stationary locomotive and locomotive load cell test stand tests.* (1) For stationary locomotive and locomotive load cell test stand tests, the microphone shall be positioned on a line perpendicular to the track at a point 30 meters (100 feet) from the track centerline at the longitudinal midpoint of the locomotive.

(2) The sound level meter shall be observed for thirty seconds after the test throttle setting is established to assure operating stability. The maximum sound level observed during that time shall be utilized for compliance purposes.

(3) Measurement of stationary locomotive and locomotive load cell test stand noise shall be made with all cooling fans operating.

(c) *Rail car pass-by test.* (1) For rail car pass-by tests, the microphone shall be positioned on a line perpendicular to the track 30 meters (100 feet) from the track centerline.

Environmental Protection Agency

§ 201.24

(2) Rail car noise measurements shall be made when the locomotives have passed a distance 152.4 meters (500 feet) or 10 rail cars beyond the point at the intersection of the track and the line which extends perpendicularly from the track to the microphone location, providing any other locomotives are also at least 152.4 meters (500 feet) or 10 rail car lengths away from the measuring point. The maximum sound level observed in this manner which exceeds the noise levels specified in §201.13 shall be utilized for compliance purposes.

(3) Measurements shall be taken on reasonably well maintained tracks.

(4) Noise levels shall not be recorded if brake squeal is present during the test measurement.

(d) *Locomotive pass-by test.* (1) For locomotive pass-by tests, the microphone shall be positioned on a line perpendicular to the track at a point 30 meters (100 feet) from the track centerline.

(2) The noise level shall be measured as the locomotive approaches and passes by the microphone location. The maximum noise level observed during this period shall be utilized for compliance purposes.

(3) Measurements shall be taken on reasonably well maintained tracks.

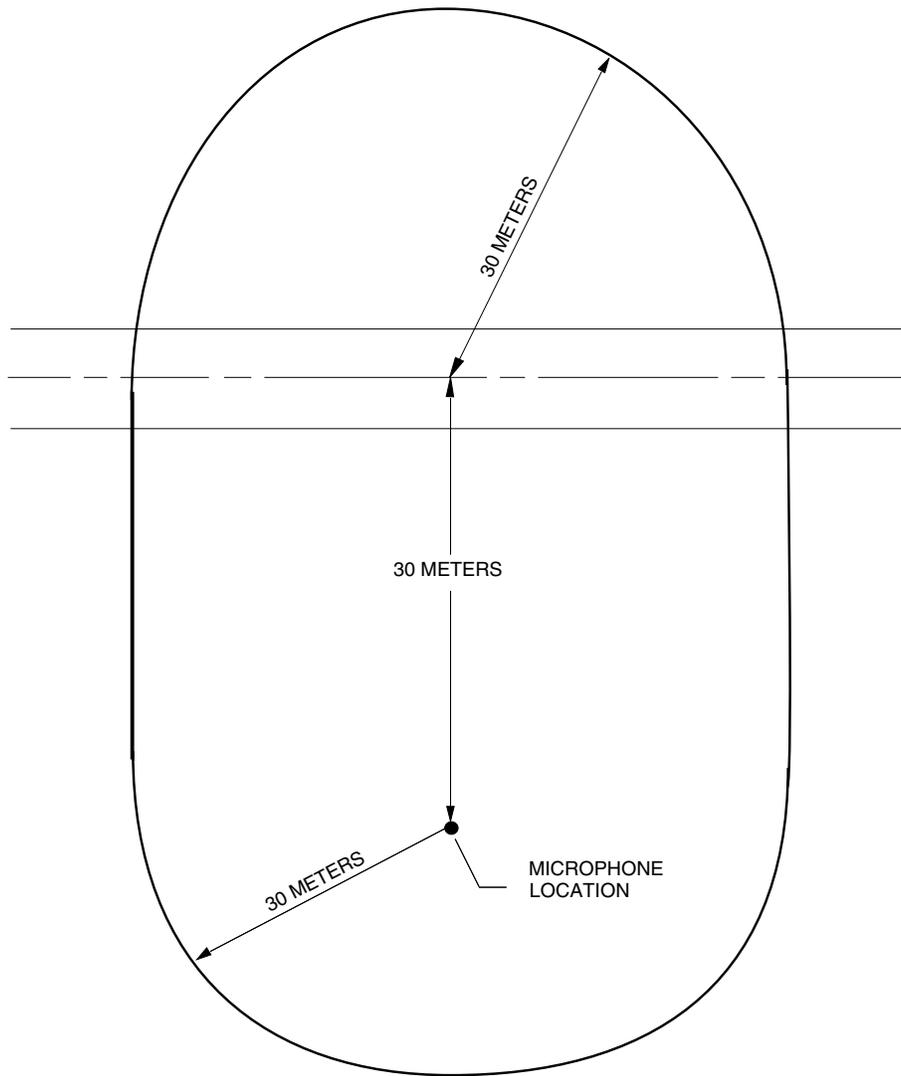


Figure 1. Test Site Clearance Requirement for Stationary Locomotive, Locomotive Pass-by, Rail Car Pass-by, and Locomotive Load Cell Test Stand Tests.

§ 201.25 Measurement location and weather conditions for measurement on receiving property of the noise of retarders, car coupling, locomotive load cell test stands, and stationary locomotives.

(a) Measurements must be conducted only at receiving property measurement locations.

(b) Measurement locations on receiving property must be selected such that no substantially vertical plane surface, other than a residential or commercial unit wall or facility boundary noise barrier, that exceeds 1.2 meters (4 feet) in height is located within 10 meters (33.3 feet) of the microphone and that no exterior wall of a residential or commercial structure is located within 2.0 meters (6.6 feet) of the microphone. If the residential structure is a farm home, measurements must be made 2.0 to 10.0 meters (6.6 to 33.3 feet) from any exterior wall.

(c) No measurement may be made when the average wind velocity during the period of measurement exceeds 19.3 km/hr (12 mph) or when the maximum wind gust velocity exceeds 32.2 km/hr (20 mph).

(d) No measurement may be taken when precipitation, e.g., rain, snow, sleet, or hail, is occurring.

§ 201.26 Procedures for the measurement on receiving property of retarder and car coupling noise.

(a) *Retarders*—(1) *Microphone*. The microphone must be located on the receiving property and positioned at a height between 1.2 and 1.5 meters (4 to 5 feet) above the ground. The microphone must be positioned with respect to the equipment in accordance with the manufacturers' recommendations for Type 1 or 2 performance as appropriate. No person may stand between the microphone and the equipment being measured or be otherwise positioned relative to the microphone at variance with the manufacturers' recommendations for Type 1 or 2 performance as appropriate.

(2) *Data*. The maximum A-weighted sound levels (FAST) for every retarder sound observed during the measurement period must be read from the indicator and recorded. At least 30 consecutive retarder sounds must be meas-

ured. The measurement period must be at least 60 minutes and not more than 240 minutes.

(3) *Adjusted average maximum A-weighted sound level*. The energy average level for the measured retarder sounds must be calculated to determine the value of the average maximum A-weighted sound level ($L_{ave\ max}$). This value is then adjusted by adding the adjustment (C) from Table 2 appropriate to the number of measurements divided by the duration of the measurement period (n/T), to obtain the adjusted average maximum A-weighted sound level ($L_{adj\ ave\ max}$) for retarders.

(b) *Car coupling impact*—(1) *Microphone*. The microphone must be located on the receiving property and at a distance of at least 30 meters (100 feet) from the centerline of the nearest track on which car coupling occurs and its sound is measured (that is, either the microphone is located 30 meters (100 feet) from the nearest track on which couplings occur, or all sounds resulting from car coupling impacts that occur on tracks with centerlines located less than 30 meters (100 feet) from the microphone are disregarded). The microphone shall be positioned at a height between 1.2 and 1.5 meters (4 and 5 feet) above the ground, and it must be positioned with respect to the equipment in accordance with the manufacturers' recommendations for Type 1 or 2 performance as appropriate. No person may stand between the microphone and the equipment being measured or be otherwise positioned relative to the microphone at variance with the manufacturers' recommendations for Type 1 or 2 performance as appropriate.

(2) *Data*. The maximum A-weighted sound levels (FAST) for every car coupling impact sound observed during the measurement period must be read from the indicator and recorded. At least 30 consecutive car coupling impact sounds must be measured. The measurement period must be at least 60 minutes and not more than 240 minutes, and must be reported.

TABLE 2—ADJUSTMENT TO $L_{ave\ max}$ TO OBTAIN $L_{adj\ ave\ max}$ FOR RETARDERS AND CAR COUPLING IMPACTS¹

[n/T = number of measurements/measurement duration (min)]	C = Adjustment in dB]
0.111 to 0.141	-9
0.142 to 0.178	-8
0.179 to 0.224	-7
0.225 to 0.282	-6
0.283 to 0.355	-5
0.356 to 0.447	-4
0.448 to 0.562	-3
0.563 to 0.708	-2
0.709 to 0.891	-1
0.892 to 1.122	0
1.123 to 1.413	+1
1.414 to 1.778	+2
1.779 to 2.239	+3
2.240 to 2.818	+4
2.819 to 3.548	+5
3.549 to 4.467	+6

¹ $L_{adj\ ave\ max} = L_{ave\ max} + C$ in dB. Values in Table 2 were calculated from $[C = 10 \log n/T]$ with intervals selected to round off values to the nearest whole decibel. The table may be extended or interpolated to finer interval gradations by using this defining equation.

(3) *Adjusted average maximum A-weighted sound level.* The energy average level for the measured car coupling sounds is calculated to determine the average maximum sound level ($L_{ave\ max}$). It is then adjusted by adding the adjustment (C) from Table 2 appropriate to the number of measurements divided by the duration of the measurement period (n/T), to obtain the adjusted average maximum A-weighted sound level ($L_{adj\ ave\ max}$) for car coupling impacts.

§ 201.27 Procedures for: (1) Determining applicability of the locomotive load cell test stand standard and switcher locomotive standard by noise measurement on a receiving property; (2) measurement of locomotive load cell test stands more than 120 meters (400 feet) on a receiving property.

(a) *Microphone.* The microphone must be located at a receiving property measurement location and must be positioned at a height between 1.2 and 1.5 meters (4 and 5 feet) above the ground. Its position with respect to the equipment must be in accordance with the manufacturers' recommendations for Type 1 or 2 performance as appropriate. No person may stand between the microphone and the equipment being measured or be otherwise positioned relative to the microphone at variance to the manufacturers' recommendations for Type 1 or Type 2 performance as appropriate.

(b) *Data.* (1) When there is evidence that at least one of these two types of nearly steady state sound sources is affecting the noise environment, the following measurements must be made. The purpose of these measurements is to determine the A-weighted L_{90} statistical sound level, which is to be used as described in subparagraph (c) below to determine the applicability of the source standards. Before this determination can be made, the measured L_{90} is to be "validated" by comparing the measured L_{10} and L_{99} statistical sound levels. If the difference between these levels is sufficiently small (4 dB or less), the source(s) being measured is considered to be a nearly steady state source.

(2) Data shall be collected by measuring the instantaneous A-weighted sound level (FAST) at a rate of at least once each 10 seconds for a measurement period of at least 15 minutes and until 100 measurements are obtained. The data may be taken manually by direct reading of the indicator at 10 second intervals (± 1 second), or by attaching a statistical analyzer, graphic level recorder, or other equivalent device to the sound level meter for a more continuous recording of the instantaneous sound level.

(3) The data shall be analyzed to determine the levels exceeded 99%, 90%, and 10% of the time, i.e., L_{99} , L_{90} , and L_{10} , respectively. The value of L_{90} is considered a valid measure of the A-weighted sound level for the standards in § 201.16 only if the difference between L_{10} and L_{99} has a value of 4 dB or less. If a measured value of L_{90} is not valid for this purpose, measurements may be taken over a longer period to attempt to improve the certainty of the measurement and to validate L_{90} . If L_{90} is valid and is less than the level in applicable standards for these source types, the sources are in compliance. If the measured value of L_{90} is valid and exceeds the initial 65 dB requirement for any of the source types that appear to be affecting the noise environments, the evaluation according to the following paragraph (c) is required.

(c) *Determination of applicability of the standard when L_{90} is validated and is in excess of one or more of the source standards.* The following procedures must be

used to determine the compliance of the various source types when L_{90} is validated and in excess of one or more of the applicable standards.

(1) The principal direction of the nearly steady-state sound at the measurement location must be determined, if possible, by listening to the sound and localizing its apparent source(s). If the observer is clearly convinced by this localization process that the sound emanates only from one or both of these two sources, then:

(i) If only a stationary locomotive(s), including at least one switcher locomotive, are present, the value of L_{90} is the value of the A-weighted sound level to be used in determining if the 65 dB requirement is exceeded and compliance with the standards in §§ 201.11(c) and 201.12(c) is necessary.

(ii) If only a locomotive load cell test stand and the locomotive being tested are present and operating, the value of L_{90} is the value of the A-weighted sound level to be used in determining applicability of the standard in § 201.16.

(iii) If a locomotive load cell test stand(s) and the locomotive being tested are present and operating with stationary locomotive(s), including at least one switcher locomotive, the value L_{90} minus 3 dB is the value of the A-weighted sound level to be used in determining applicability of the standards in §§ 201.11(c), 201.12(c) and 201.16.

(iv) If a locomotive load cell test stand(s) and the locomotive being tested are present and operating, and a stationary locomotive(s) is present, and if the nearly steady-state sound level is observed to change by 10 dB, coincident with evidence of a change in operation of the locomotive load cell test stand but without apparent change in the location of stationary locomotives, another measurement of L_{90} must be made in accordance with paragraph (b) of this section. If this additional measure of L_{90} is validated and differs from the initial measure of L_{90} by an absolute value of 10 dB or more, then the higher value of L_{90} is the value of the A-weighted sound level to be used in determining applicability of the standard in § 201.16.

(2) In order to accomplish the comparison demonstration of paragraph (c)(3) of this section, when one or more

source types is found not to be in compliance with the applicable standard(s), documentation of noise source information shall be necessary. This will include, but not be limited to, the approximate location of all sources of each source type present and the microphone position on a diagram of the particular railroad facility, and the distances between the microphone location and each of the sources must be estimated and reported. Additionally, if other rail or non-rail noise sources are detected, they must be identified and similarly reported.

(3) If it can be demonstrated that the validated L_{90} is less than 5 dB greater than any L_{90} measured at the same receiving property location when the source types that were operating during the initial measurement(s) are either turned off or moved, such that they can no longer be detected, the initial value(s) of L_{90} must not be used for determining applicability to the standards. This demonstration must be made at a time of day comparable to that of the initial measurements and when all other conditions are acoustically similar to those reported in paragraph (c)(2) of this section.

[45 FR 1263, Jan. 4, 1980; 47 FR 14709, Apr. 6, 1982]

§ 201.28 Testing by railroad to determine probable compliance with the standard.

(a) To determine whether it is probably complying with the regulation, and therefore whether it should institute noise abatement, a railroad may take measurements on its own property at locations that:

(1) Are between the source and receiving property

(2) Derive no greater benefit from shielding and other noise reduction features that does the receiving property; and

(3) Otherwise meet the requirements of § 201.25.

(b) Measurements made for this purpose should be in accordance with the appropriate procedures in § 201.26 or § 201.27. If the resulting level is less than the level stated in the standard, then there is probable compliance with the standard.

(c) This procedure is set forth to assist the railroad in devising its compliance plan, not as a substantive requirement of the regulation.

PART 202—MOTOR CARRIERS ENGAGED IN INTERSTATE COMMERCE

Subpart A—General Provisions

Sec.

- 202.10 Definitions.
- 202.11 Effective date.
- 202.12 Applicability.

Subpart B—Interstate Motor Carrier Operations Standards

- 202.20 Standards for highway operations.
- 202.21 Standard for operation under stationary test.
- 202.22 Visual exhaust system inspection.
- 202.23 Visual tire inspection.

AUTHORITY: Sec. 18, 36 Stat. 1249, 42 U.S.C. 4917(a).

Subpart A—General Provisions

§ 202.10 Definitions.

As used in this part, all terms not defined herein shall have the meaning given them in the Act:

(a) *Act* means the Noise Control Act of 1972 (Pub. L. 92–574, 86 Stat. 1234).

(b) *Common carrier by motor vehicle* means any person who holds himself out to the general public to engage in the transportation by motor vehicle in interstate or foreign commerce of passengers or property or any class or classes thereof for compensation, whether over regular or irregular routes.

(c) *Contract carrier by motor vehicle* means any person who engages in transportation by motor vehicle of passengers or property in interstate or foreign commerce for compensation (other than transportation referred to in paragraph (b) of this section) under continuing contracts with one person or a limited number of persons either (1) for the furnishing of transportation services through the assignment of motor vehicles for a continuing period of time to the exclusive use of each person served or (2) for the furnishing of transportation services designed to

meet the distinct need of each individual customer.

(d) *Cutout or by-pass or similar devices* means devices which vary the exhaust system gas flow so as to discharge the exhaust gas and acoustic energy to the atmosphere without passing through the entire length of the exhaust system, including all exhaust system sound attenuation components.

(e) *dB(A)* means the standard abbreviation for A-weighted sound level in decibels.

(f) *Exhaust system* means the system comprised of a combination of components which provides for enclosed flow of exhaust gas from engine parts to the atmosphere.

(g) *Fast meter response* means that the fast dynamic response of the sound level meter shall be used. The fast dynamic response shall comply with the meter dynamic characteristics in paragraph 5.3 of the American National Standard Specification for Sound Level Meters, ANSI S1. 4–1971. This publication is available from the American National Standards Institute, Inc., 1420 Broadway, New York, New York 10018.

(h) *Gross Vehicle Weight Rating* (GVWR) means the value specified by the manufacturer as the loaded weight of a single vehicle.

(i) *Gross Combination Weight Rating* (GCWR) means the value specified by the manufacturer as the loaded weight of a combination vehicle.

(j) *Highway* means the streets, roads, and public ways in any State.

(k) *Interstate commerce* means the commerce between any place in a State and any place in another State or between places in the same State through another State, whether such commerce moves wholly by motor vehicle or partly by motor vehicle and partly by rail, express, water or air. This definition of “interstate commerce” for purposes of these regulations is the same as the definition of “interstate commerce” in section 203(a) of the Interstate Commerce Act. [49 U.S.C. 303(a)]

(l) *Motor carrier* means a common carrier by motor vehicle, a contract carrier by motor vehicle, or a private carrier of property by motor vehicle as those terms are defined by paragraphs (14), (15), and (17) of section 203(a) of